

V2214

Report Numbers: 208-TRC-95-008
212-TRC-95-008
301-TRC-95-008

Vehicle Safety Compliance Testing
for Occupant Crash Protection,
Windshield Mounting, Windshield Zone Intrusion,
and Fuel System Integrity

General Motors Corporation

1995 Pontiac Sunfire

4-door sedan

NHTSA Number: CS0114

TRC Test Number: 950201

Transportation Research Center Inc.

10820 State Route 347

East Liberty, Ohio 43319



February 18, 1995

Final Report

Prepared For:

U.S. Department of Transportation
National Highway Traffic Safety Administration
Office of Vehicle Safety Compliance (NEF-30)
400 Seventh Street, S.W., Room No. 6115
Washington, DC 20590

Rec'd
3/6/95

This Final Test Report was prepared for the U.S. Department of Transportation, National Highway Traffic Safety Administration, under Contract No. DTNH22-93-D-01089.

This publication is distributed by the U. S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings, and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Report Prepared By:

Craig A. Markusic Date 2/20/95
Craig A. Markusic, Senior Project Engineer
Transportation Research Center Inc.

Report Approved By:

Jeffery W. Sankey Date 2/20/95
Jeffery W. Sankey, Engineering Supervisor
Transportation Research Center Inc.

Final Report Accepted By:

Charles R. Case Date 3/19/96
Contracting Officer's Technical Representative (COTR),
NHTSA, Office of Vehicle Safety Compliance

1. Report No. 208-TRC-95-008 212-TRC-95-008 301-TRC-95-008	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle Final Report of FMVSS Nos. 208, 212, 219 (partial), and 301 Compliance Testing of a 1995 Pontiac Sunfire 4-door sedan, NHTSA No. CS0114		5. Report Date February 18, 1995	
		6. Performing Organization Code TRC	
7. Author(s) C. A. Markusic, Senior Project Engineer, TRC		8. Performing Organization Report No. 208-TRC-95-008, 212-TRC-95-008, 301-TRC-95-008	
9. Performing Organization Name and Address Transportation Research Center Inc. 10820 State Route 347 East Liberty, OH 43319		10. Work Unit No. (TRAIS)	
		11. Contract or Grant No. DTNH22-93-D-01089	
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Office of Vehicle Safety Compliance (NEF-31) 400 Seventh St., Washington, DC 20590		13. Type of Report and Period Covered Final Report February 1995	
		14. Sponsoring Agency Code NEF-30	
15. Supplemental Notes			
16. Abstract A 30 mph flat frontal barrier impact test was conducted on a 1995 Pontiac Sunfire 4-door sedan, NHTSA No. CS0114, at Transportation Research Center Inc. on February 1, 1995. This test was conducted to determine compliance with Federal Motor Vehicle Safety Standards: FMVSS 208, "Occupant Crash Protection"; 212, "Windshield Mounting"; 219 (partial), "Windshield Zone Intrusion"; and 301 "Fuel System Integrity." The barrier impact velocity was 29.6 mph. The vehicle's maximum static crush was 11.5 inches. The ambient temperature was 74° F. The driver's Head Injury Criteria (HIC) was 297. The driver's chest maximum resultant acceleration with three (3) milliseconds minimum duration was 49.2 g. The driver's chest maximum deflection was 0.9 inch. The driver's left and right femur maximum axial forces were 1330 pounds and 1419 pounds, respectively. The passenger's HIC was 358. The passenger's chest maximum resultant acceleration with three (3) milliseconds minimum duration was 48.4 g. The passenger's chest maximum deflection was 0.6 inch. The passenger's left and right femur maximum axial forces were 1322 pounds and 1442 pounds, respectively.			
17. Key Words Frontal Impact 30 mph Vehicle Safety Compliance Testing: FMVSS 208, "Occupant Crash Protection" FMVSS 212, Windshield Retention" FMVSS 219, Windshield Zone Intrusion" FMVSS 301, "Fuel System Integrity"		18. Distribution Statement Copies of this report are available from: NHTSA Technical Reference Division Nassif Building, Room 5108 400 Seventh Street, S.W. Washington, DC 20590	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. Number of Pages 127	22. Price

METRIC CONVERSION FACTORS

Approximate Conversions to Metric Measures

Symbol	When You Know	Multiply by	To Find	Symbol
LENGTH				
in	inches	2.5	centimeters	cm
ft	feet	30	meters	m
yd	yards	0.9	kilometers	km
mi	miles	1.6		
AREA				
in ²	square inches	6.5	square centimeters	cm ²
ft ²	square feet	0.09	square meters	m ²
yd ²	square yards	0.8	square meters	m ²
mi ²	square miles	2.6	square kilometers	km ²
	acres	0.4	hectares	ha
MASS (weight)				
oz	ounces	28	grams	g
lb	pounds	0.45	kilograms	kg
	short tons (2000 lb)	0.9	tonnes	t
VOLUME				
tsp	teaspoons	5	milliliters	ml
Tbsp	tablespoons	15	milliliters	ml
fl oz	fluid ounces	30	milliliters	ml
c	cups	0.24	liters	l
pt	pints	0.47	liters	l
qt	quarts	0.95	liters	l
gal	gallons	3.8	liters	l
ft ³	cubic feet	0.03	cubic meters	m ³
yd ³	cubic yards	0.76	cubic meters	m ³
TEMPERATURE (exact)				
°F	Fahrenheit temperature	5/9 (after subtracting 32)	Celsius temperature	°C

*1 in. = 2.54 (exact). For other exact conversions and more detailed tables, see NBS Misc. Publ. 286, Units of Weights and Measures, Price \$2.25, SD Catalog No. C13.10.286.

Approximate Conversions from Metric Measures

Symbol	When You Know	Multiply by	To Find	Symbol
LENGTH				
mm	millimeters	0.04	inches	in
cm	centimeters	0.4	inches	in
m	meters	3.3	feet	ft
m	meters	1.1	yards	yd
km	kilometers	0.6	miles	mi
AREA				
cm ²	square centimeters	0.16	square inches	in ²
m ²	square meters	1.2	square yards	yd ²
km ²	square kilometers	0.4	square miles	mi ²
ha	hectares (10,000 m ²)	2.5	acres	
MASS (weight)				
g	grams	0.035	ounces	oz
kg	kilograms	2.2	pounds	lb
t	tonnes (1000 kg)	1.1	short tons	
VOLUME				
ml	milliliters	0.03	fluid ounces	fl oz
l	liters	2.1	pints	pt
l	liters	1.06	quarts	qt
l	liters	0.26	gallons	gal
m ³	cubic meters	35	cubic feet	ft ³
m ³	cubic meters	1.3	cubic yards	yd ³
TEMPERATURE (exact)				
°C	Celsius temperature	9/5 (then add 32)	Fahrenheit temperature	°F

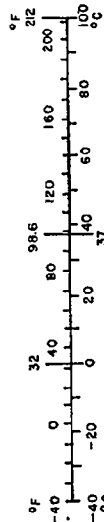


Table of Contents

<u>Section</u>	<u>Description</u>	<u>Page</u>
1.0	Purpose and Test Procedure	1
2.0	Frontal Barrier Impact Test Summary	5
3.0	FMVSS 208, 212, 219 (Partial), and 301 Data	20
4.0	Vehicle, Occupant, and Camera Measurements	37
Appendix A	Photographs	A-1
Appendix B	Data Plots	B-1
Appendix C	Manufacturer's Vehicle Information	C-1

List of Tables

<u>Number</u>	<u>Description</u>	<u>Page</u>
1	Crash Test Summary	8
2	Test Vehicle Information	10
3	Post-Impact Data	13
4	Post-test Airbag Data	16
5	Vehicle Accelerometer Locations and Data Summary	19
6	Dummy Injury Criteria	21
7	FMVSS 208 Seat Belt Comfort and Convenience Test Summary Front Outboard Designated Seating Positions	23
8	FMVSS 208 Equipment Data	26
9	Fuel System Data	31
10	FMVSS 301 Post-Impact Test Data	32
11	Impacted Vehicle Measurements	39
12	Dummy Measurement Data for Front Seat Occupants	42
13	Motion Picture Camera Locations	45

List of Figures

<u>Number</u>	<u>Description</u>	<u>Page</u>
1	Impact Velocity Measurement System	14
2	Accident Investigation Division Data for 30 mph Frontal Barrier Impact	15
3	Vehicle Accelerometer Placement	18
4	FMVSS 212 Test Data	29
5	FMVSS 219 Test Data	30
6	FMVSS 301 Static Rollover Test Data	33
7	Pre-test and Post-test Measurement Points	38
8	Vehicle Target Locations	40
9	Dummy Measurement Locations for Front Seat Occupants	41
10	Camera Positions	43

List of Photographs

<u>Figure</u>	<u>Photograph Title</u>	<u>Page</u>
A-1.	Pre-test Front View	A-2
A-2.	Post-test Front View	A-3
A-3.	Pre-test Left Side View	A-4
A-4.	Post-test Left Side View	A-5
A-5.	Pre-test Right Side View	A-6
A-6.	Post-test Right Side View	A-7
A-7.	Pre-test Rear View	A-8
A-8.	Post-test Rear View	A-9
A-9.	Pre-test Front Underbody View	A-10
A-10.	Post-test Front Underbody View	A-11
A-11.	Pre-test Driver's Knee Bolster View	A-12
A-12.	Pre-test Driver's Seat Location View	A-13
A-13.	Pre-test Passenger's Seat Location View	A-14
A-14.	Pre-test Steering Column at Firewall View - Interior	A-15
A-15.	Post-test Steering Column at Firewall View - Interior	A-16
A-16.	Pre-test Steering Column at Firewall View - Exterior	A-17
A-17.	Pre-test Driver Dummy & Vehicle Interior View	A-18
A-18.	Post-test Driver Dummy & Vehicle Interior View	A-19
A-19.	Pre-test Passenger Dummy & Vehicle Interior View	A-20
A-20.	Post-test Passenger Dummy & Vehicle Interior View	A-21
A-21.	Post-test Driver Dummy Head Contact - View 1	A-22
A-22.	Post-test Driver Dummy Head Contact - View 2	A-23
A-23.	Post-test Driver Dummy Head Contact - View 3	A-24
A-24.	Post-test Driver Dummy Knee Contact - View 1	A-25
A-25.	Post-test Driver Dummy Knee Contact - View 2	A-26
A-26.	Post-test Passenger Dummy Head Contact - View 1	A-27
A-27.	Post-test Passenger Dummy Head Contact - View 2	A-28
A-28.	Post-test Passenger Dummy Knee Contact - View 1	A-29
A-29.	Post-test Passenger Dummy Knee Contact - View 2	A-30
A-30.	Pre-test Vehicle Certification Label	A-31
A-31.	Pre-test Recommended Tire Pressure Label	A-32

Section 1.0

Purpose and Test Procedure

Purpose

This 30 mph flat frontal barrier impact test is part of the Federal Motor Vehicle Safety Standards (FMVSS) 208, 212, 219 (partial), and 301 compliance test program conducted for the National Highway Traffic Safety Administration (NHTSA) by the Transportation Research Center Inc. (TRC) under Contract No. DTNH22-93-D-01089. The purpose of this test was to determine if the subject vehicle, a 1995 Pontiac Sunfire 4-door sedan, NHTSA No. CS0114, meets the performance requirements of FMVSS 208, "Occupant Crash Protection"; FMVSS 212, "Windshield Mounting"; FMVSS 219 (partial), "Windshield Zone Intrusion"; and FMVSS 301, "Fuel System Integrity," in the flat frontal barrier impact mode.

Test Procedure

This test was conducted in accordance with NHTSA's Office of Vehicle Safety Compliance (OVSC) Laboratory Test Procedure No. TP-208-09. Data was obtained relative to FMVSS 208, "Occupant Crash Protection"; FMVSS 212, "Windshield Mounting"; FMVSS 219 (partial), "Windshield Zone Intrusion"; and FMVSS 301, "Fuel System Integrity," performance.

The test vehicle was instrumented with seven (7) accelerometers to measure longitudinal axis accelerations and one (1) accelerometer to measure vertical axis acceleration. The vehicle's specified impact velocity range was 28.9 to 29.9 mph. The vehicle impacted a flat frontal barrier.

The test vehicle contained two (2) Part 572 E 50th percentile adult male anthropomorphic test devices (dummies). The dummies were positioned in the front outboard designated seating positions according to the dummy placement procedure specified in Appendix C of the Laboratory Test Procedure.

Both dummies were instrumented with head and chest accelerometers to measure longitudinal, lateral, and vertical accelerations, and with left and right femur load cells to measure axial forces. Each Part 572 E dummy's instrumentation also included a chest potentiometer to measure longitudinal deflection.

The twenty-six (26) data channels were multiplexed and recorded on a 14-track tape drive. The data was digitally sampled at 12,500 samples per second and processed per Sections 11.13 through 11.15 of the Laboratory Test Procedure.

The crash event was recorded by one (1) real-time panning motion picture camera and fourteen (14) high-speed motion picture cameras. The pre-test and post-test conditions were recorded by one (1) real-time motion picture camera.

The vehicle and occupant data are summarized in Section 2.0. The FMVSS 208, 212, 219 (partial) and 301 data are presented in Section 3.0. The vehicle, occupant, and camera measurements are presented in Section 4.0. Appendix A contains the still photographic prints. Appendix B contains the dummy and vehicle data plots. Appendix C contains the manufacturer's vehicle information.

Section 2.0

Frontal Barrier Impact Test Summary

Test Results Summary

This flat frontal barrier test was conducted at TRC on February 1, 1995.

The test vehicle, a 1995 Pontiac Sunfire 4-door sedan, NHTSA No. CS0114, appeared to comply with the performance requirements of FMVSS 208, 212, 219 (partial), and 301 in the flat frontal barrier impact mode. The Head Injury Criteria (HIC) calculations were less than 1000, the chest resultant accelerations did not exceed 60 g's, and the compressive forces transmitted through the upper legs did not exceed 2,250 pounds as measured by Part 572 E dummies seated in the front outboard designated seating positions. For each Part 572 E dummy the chest deflection did not exceed 3.0 inches. The vehicle's restraint system met the applicable comfort and convenience requirements. The windshield periphery retention was 100 percent. There was no penetration into any portion of the windshield. No fluid spilled from the vehicle's fuel system following the impact or during the static rollover test.

The test vehicle was equipped with airbags at the driver's and right front passenger's seating positions. The vehicle's test weight was 3220 pounds. The vehicle's impact speed was 29.6 mph. The vehicle's maximum static crush was 11.5 inches.

The driver's HIC was 297. The driver's chest maximum resultant acceleration with three (3) milliseconds minimum duration was 49.2 g. The driver's chest maximum deflection was 0.9 inch. The driver's left and right femur maximum compressive forces were 1330 pounds and 1419 pounds, respectively.

The right front passenger's HIC was 358. The right front passenger's chest maximum resultant acceleration with three (3) milliseconds minimum duration was 48.4 g. The right front passenger's chest maximum deflection was 0.6 inch. The right front passenger's left and right femur maximum compressive forces were 1322 pounds and 1442 pounds, respectively.

There was no loss of windshield periphery retention and no penetration through the windshield. Following the impact, no fluid spilled from the vehicle's fuel system prior to the static rollover test or during any portion of the static rollover test.

Data Acquisition Explanations

The left brake caliper X-axis accelerometer, BCLXG1, lost data from approximately 76 to 88 milliseconds as a result of the accelerometer's cable being crushed by the vehicle's crush upon impact.

The engine bottom X-axis accelerometer, ENGXG2, malfunctioned after the vehicle was launched and prior to impact.

Table 1 Crash Test Summary

NHTSA number:	CS0114
Test type:	Frontal barrier impact
Test date:	02/01/95
Test time:	1443
Ambient temperature at impact area:	74° F
Vehicle year/make/ model/body style:	1995/Pontiac/Sunfire/4-door sedan
Vehicle test weight:	3220 lb
Impact angle ¹ :	0°
Impact velocity ² :	
Primary:	29.6 mph
Secondary:	29.6 mph
Maximum static crush:	11.5 in
Average rebound:	23.2 in
Number of cameras:	
Real-time:	2
High-speed:	14
Door opening data:	
Left-front:	Easy
Right-front:	Easy

¹ With respect to tow track centerline.

² Speed trap measurement ($\pm .05$ mph accuracy)

Table 1 Crash Test Summary, Cont'd.

Dummies:	<u>Driver #230</u>	<u>Passenger #229</u>
Type:	Part 572 E	Part 572 E
Location:	Left front	Right front
Restraint:	Airbag	Airbag
Number of data channels:	9	9
Front seat data:		
Seat track failure:	None	None
Seat back failure:	None	None
Visible dummy contact points:		
Head:	Airbag & head restraint	Airbag & head restraint
Chest:	Airbag	Airbag
Abdomen:	None	None
Left knee:	Instrument panel	Instrument panel
Right knee:	Instrument panel	Instrument panel

Table 2 Test Vehicle Information

Vehicle year/make/
model/body style: 1995/Pontiac/Sunfire/4-door sedan

Color: Blue

VIN: 1G2JB5243S7501068

NHTSA number: CS0114

Engine data:

Placement: Lateral/transverse

Cylinders: 4

Displacement: 2.2 liters

Transmission data: 3 speed, manual, X automatic, overdrive

Final drive: X fwd, rwd, 4wd

Date vehicle received: 11/21/94

Odometer reading: 79

Dealer's name
and address: Dave Gill Pontiac-GMC Truck, Inc.
4700 E. Broad Street
Columbus, OH 43213

Accessories:

Power steering	Yes	Automatic transmission	Yes
Power brakes	Yes	Automatic speed control	No
Power seats	No	Tilting steering wheel	Yes
Power windows	No	Telescoping steering wheel	No
Tinted glass	Yes	Air conditioning	Yes
Radio	Yes	Anti-skid brake	Yes
Clock	Yes	Rear window defroster	Yes
Power door locks	No	Other	None

Certification data from vehicle's label:

Vehicle manufactured by: General Motors Corporation

Date of manufacture: 11/94

VIN: 1G2JB5243S7501068

GVWR: 3679 lb

GAWR: Front: 2018 lb

Rear: 1661 lb

Table 2 Test Vehicle Information, Cont'd.

Size of tires on vehicle: P195/65R15

Tire pressure with maximum
capacity vehicle load:

Front: 30 psi

Rear: 30 psi

Spare tire: Space saver

Type of front seats: Bucket

Tire & capacity data from vehicle's label:

Recommended tire size: P195/65R15

Recommended cold tire pressure:

Front: 30 psi

Rear: 30 psi

Designated Seating Capacity:

Front 2

Rear 3

Total 5

Vehicle Capacity Weight: 882 lbs.

Test vehicle attitudes:

Delivered attitude: LF: 27.2 in RF: 27.5 in LR: 28.2 in RR: 28.6 in

Fully loaded attitude: LF: 27.8 in RF: 27.0 in LR: 26.8 in RR: 27.3 in

Pre-test attitude: LF: 26.9 in RF: 27.0 in LR: 26.4 in RR: 26.5 in

Table 2 Test Vehicle Information, Cont'd.

Weight of test vehicle as received (with maximum fluids):

Right front	866	lb	Right rear	500	lb
Left front	918	lb	Left rear	483	lb
Total front weight	1784	lb	(64.5% of total vehicle weight)		
Total rear weight	983	lb	(35.5% of total vehicle weight)		
Total delivered weight	2767	lb			

Calculation of test vehicle's target test weight:

RCLW = Rated Cargo and Luggage Weight

UDW = Unloaded Delivered Weight (2767 lb)

VCW¹ = Vehicle Capacity Weight = 882

DSC = Designated Seating Capacity (5)

RCLW = VCW - 150 (DSC) = 882 - 150 (5) = 132

Target test weight = UDW + RCLW¹ + (Number of Hybrid III dummies x 167 lb
per dummy)

Target test weight = 2767 + 132 + 334 = 3233 lb

Weight of test vehicle with required dummies and 119 lb of cargo weight:

Right front	948	lb	Right rear	649	lb
Left front	966	lb	Left rear	657	lb
Total front weight	1914	lb	(59.4% of total vehicle weight)		
Total rear weight	1306	lb	(40.6% of total vehicle weight)		
Total test weight	3220	lb	(0.4% under target test weight)		

Weight of ballast secured in vehicle cargo area: 0 lb

Components removed to meet target test weight: Spare tire

CG rearward of front wheel centerline: 42.2 in

Vehicle Wheelbase: 104.0 in

¹ From vehicle's tire load label.

Table 3 Post-Impact Data

Test number: 950201
NHTSA number: CS0114
Test date: 02/01/95
Test time: 1443
Test type: Frontal barrier impact
Impact angle: 0°
Ambient temperature
at impact area: 74° F
Temperature in
occupant compartment: 66° F
Impact velocity:
Primary: 29.6 mph
Secondary: 29.6 mph
Specified range: 28.9 to 29.9 mph

Distance from vehicle to barrier:

Entering velocity trap: 14.0 in
Exiting velocity trap: 2.0 in

Test vehicle static crush:

Overall length of test vehicle:


Pre-test:	L:	174.2 in	C:	181.1 in	R:	175.2 in
Post-test:	L:	164.1 in	C:	170.0 in	R:	164.0 in
Total crush:	L:	10.1 in	C:	11.1 in	R:	11.2 in
Average crush:		10.8 in				

Test vehicle rebound from flat barrier:

Distance from test vehicle to barrier:

Post-test:	L:	23.9 in	C:	22.2 in	R:	23.6 in
Average rebound:		23.2 in				

Figure 1 Impact Velocity Measurement System

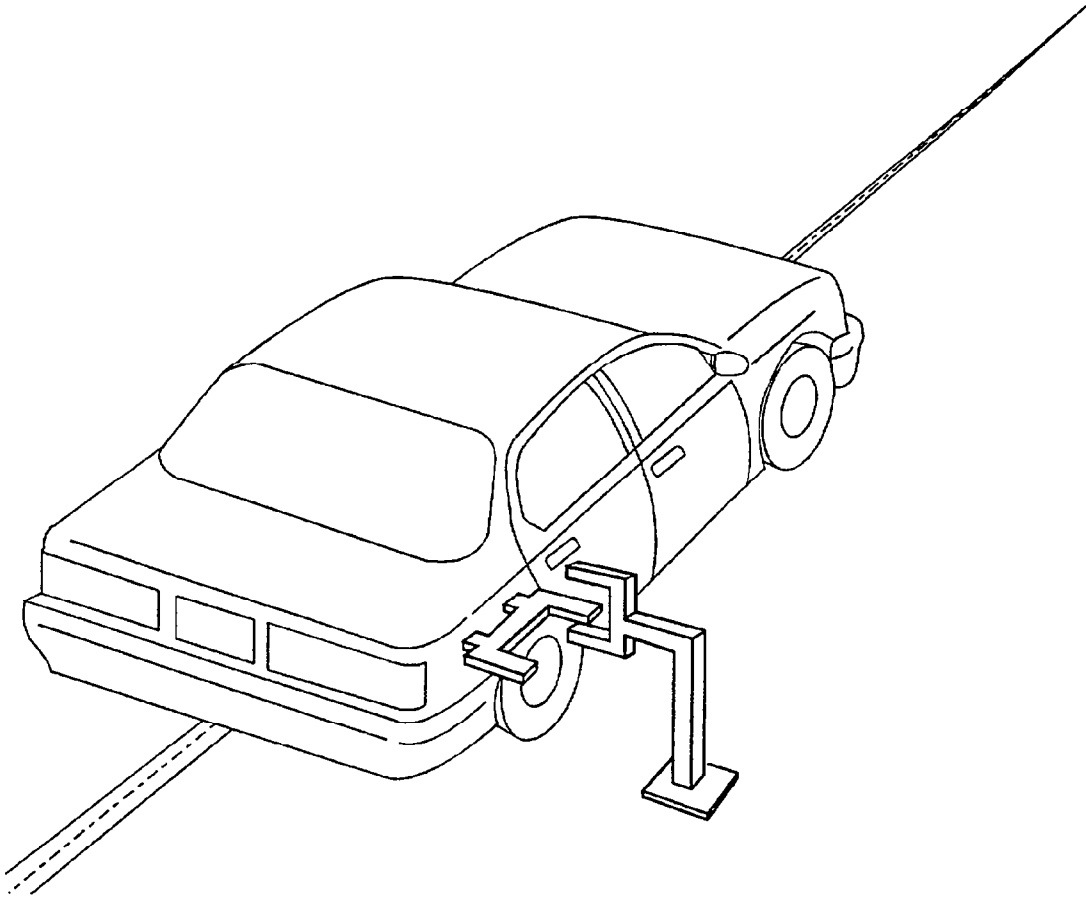

The final vane clears the final emitter/receiver pair two inches before impact.
The vanes have a one-foot spacing.

Figure 2 Accident Investigation Division Data for 30 mph Frontal Barrier Impact

NHTSA number: CS0114
 Test date: 02/01/95
 Vehicle year/make/model/body style: 1995/Pontiac/Sunfire/4-door sedan
 Vehicle size category: Compact
 VIN: 1G2JB5243S7501068
 Build date: 11/94
 Test weight: 3220 lb
 Vehicle wheelbase: 104.0 in
 Maximum width: 68.2 in
 Front overhang: 38.5 in

Collision Deformation

Classification (CDC) Code: 12FDEW2

Crush depth measurements:

C1:	10.1 in
C2:	10.9 in
C3:	11.5 in
C4:	11.2 in
C5:	9.9 in
C6:	11.2 in

Midpoint of damage: D: Vehicle Longitudinal Centerline

Length of damaged region: L: 48.0 in

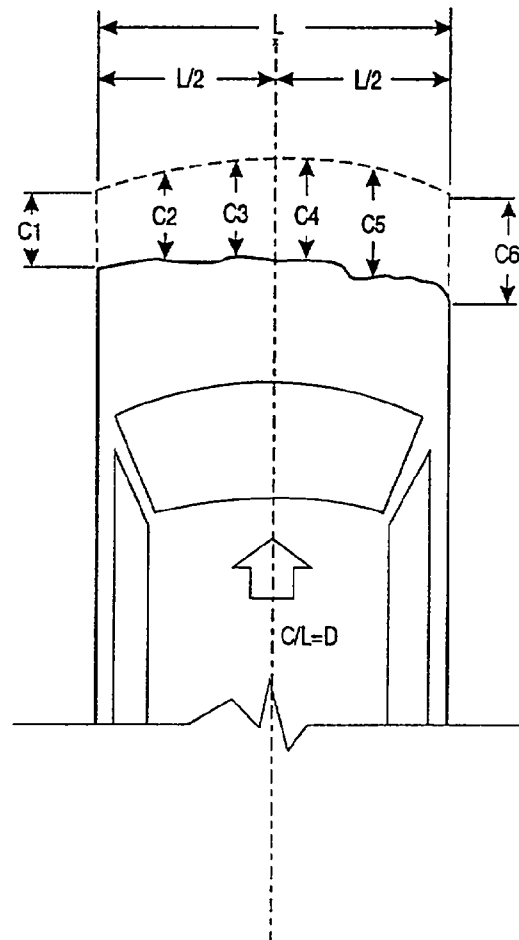


Table 4 Post-test Airbag Data

NHTSA number: CS0114
Test date: 02/01/95
Technician: Markusic
Vehicle year/make/
model/body style: 1995/Pontiac/Sunfire/4-door sedan

A. Number of airbag vent holes:

Driver: 2
Passenger: 0

B. Size of airbag vent holes:

Driver: 0.5 in dia.
Passenger: NA

C. Total airbag vent area:

Driver: 0.4 in²
Passenger: NA

D. Deflated airbag length and width dimensions or, if round, diameter

Driver:	Length	NA
	Width	NA
	Diameter	21.0 in
Passenger:	Length:	29.0 in
	Width:	34.0 in
	Diameter:	NA

Table 4 Post-test Airbag Data, Cont'd.

E. Is the airbag tethered?

Driver: No



If yes, record length of tether: NA

Passenger: No

If yes, record length of tether: NA

Driver's airbag:

Passenger's airbag:

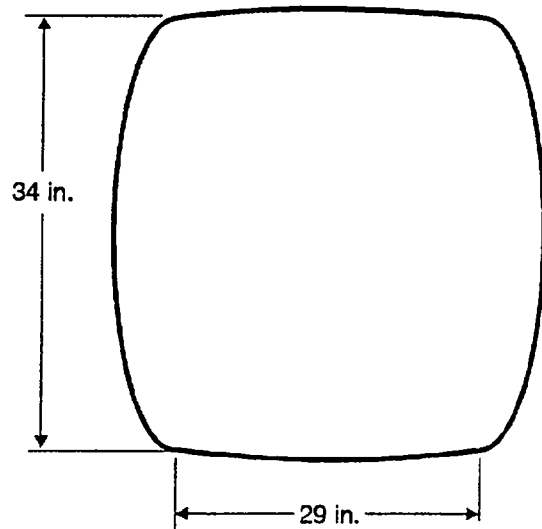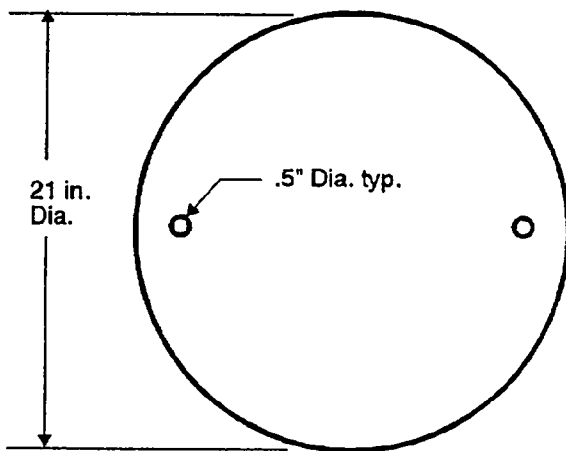


F. Airbag and gas generator part numbers and manufacturer's names.


Driver: Mfr.: Morton International; Airbag: 111437M; Gen: GBEEEX915BEE

Passenger: Mfr.: NA; Airbag: P16753275, TBI424920232

Figure 3 Vehicle Accelerometer Placement

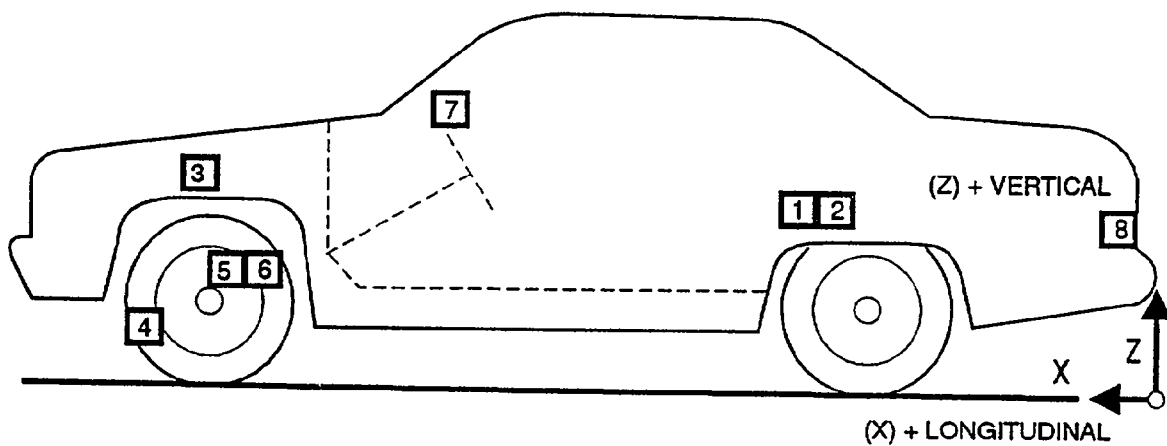

SIDE VIEW

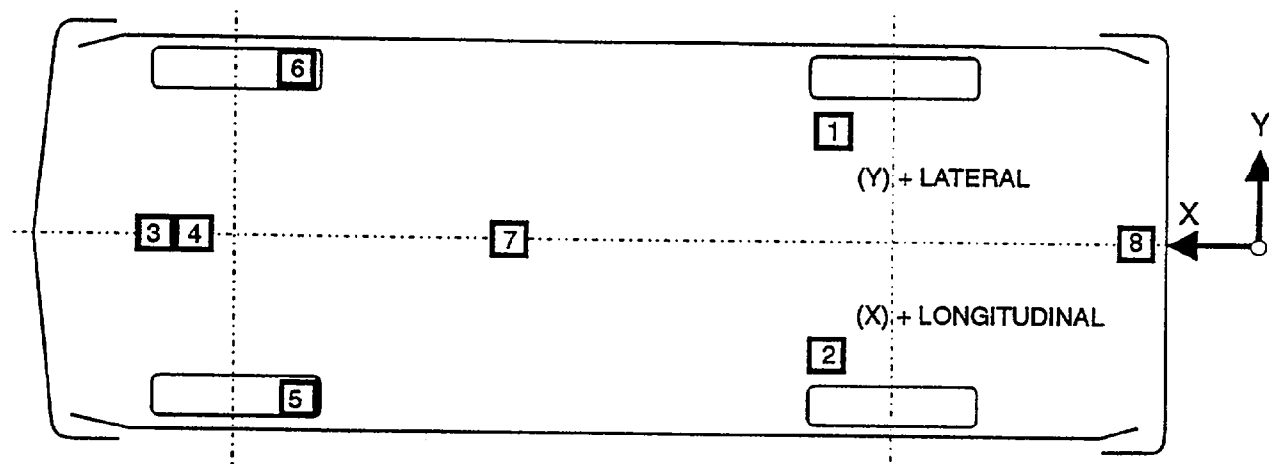

BOTTOM VIEW

Table 5 Vehicle Accelerometer Locations and Data Summary

TEST NUMBER: CS0114 No. LOCATION	X	Y	Z	POSITIVE DIRECTION	NEGATIVE DIRECTION
1 LEFT REAR SEAT CROSSMEMBER LONGITUDINAL	PRE 73.7 in POST 74.0 in	25.0 in 25.0 in	11.0 in 13.3 in	1.4 g @ 105.9 ms	34.1 g @ 67.8 ms
2 RIGHT REAR SEAT CROSSMEMBER LONGITUDINAL	PRE 74.7 in POST 74.2 in	-25.0 in -25.0 in	10.8 in 12.8 in	2.2 g @ 103.1 ms	35.6 g @ 53.4 ms
3 ENGINE TOP LONGITUDINAL	PRE 149.2 in POST 145.0 in	-5.5 in -5.5 in	30.5 in 31.5 in	92.2 g @ 141.7 ms	85.8 g @ 45.1 ms
4 ENGINE BOTTOM LONGITUDINAL ¹	PRE 149.5 in POST 143.8 in	-1.0 in -1.0 in	6.2 in 7.1 in	---	---
5 RIGHT BRAKE CALIPER LONGITUDINAL	PRE 147.0 in POST 143.2 in	-25.3 in -25.3 in	13.6 in 13.2 in	20.6 g @ 73.9 ms	72.8 g @ 52.7 ms
6 LEFT BRAKE CALIPER LONGITUDINAL ¹	PRE 146.5 in POST 143.2 in	25.3 in 25.3 in	13.9 in 13.1 in	---	---
7 INSTRUMENT PANEL CENTER LONGITUDINAL	PRE 117.8 in POST 117.8 in	0.0 in 0.0 in	35.8 in 38.5 in	55.8 g @ 31.4 ms	77.6 g @ 54.6 ms
8 VEHICLE REAR CENTER VERTICAL	PRE 10.3 in POST 10.0 in	0.0 in 0.0 in	24.8 in 20.3 in	7.1 g @ 56.9 ms	9.4 g @ 33.8 ms

REFERENCE: X: + FORWARD FROM REAR BUMPER
Y: + LEFTWARD FROM VEHICLE CENTERLINE
Z: + UPWARD FROM GROUND LEVEL

¹See DATA ACQUISITION EXPLANATIONS

Section 3.0

FMVSS 208, 212, 219 (partial), and 301 Data

Table 6 Dummy Injury Criteria

<u>Maximum Acceleration</u>							
	<u>Head</u>				<u>Chest</u>		
	X	Y	Z	R	X	Y	Z
Driver	-44.5 g	-21.5 g	27.6 g	48.5 g	-50.2 g	4.0 g	10.7 g
Passenger	-52.7 g	18.9 g	-25.7 g	57.9 g	-47.0 g	7.6 g	-17.4 g

<u>Maximum Femur Compressive Force</u>		
	<u>Left Femur</u>	<u>Right Femur</u>
Driver	1330 lbf	1419 lbf
Passenger	1322 lbf	1442 lbf

<u>Head Injury Criteria¹</u>			
	<u>HIC</u>	<u>Time t₁</u>	<u>Time t₂</u>
Driver	297	67.8 ms	103.8 ms
Passenger	358	73.0 ms	100.6 ms

<u>Chest Maximum Resultant Acceleration²</u>			
	<u>Acceleration</u>	<u>Time t₁</u>	<u>Time t₂</u>
Driver	49.2 g	79.6 ms	82.6 ms
Passenger	48.4 g	80.1 ms	83.1 ms

<u>Maximum Chest Deflection</u>	
Driver	0.9 in
Passenger	0.6 in

¹ As defined in FMVSS No. 208

² Defined as equal to or exceeding 0.003 sec. duration

Dummy Kinematic Summary

Driver Dummy

Upon impact, the driver dummy translated forward on the seat impacting both knees into the instrument panel. The dummy's head and chest impacted the airbag with the dummy's head rotating rearward. The dummy was restrained by the driver's airbag. The dummy rebounded rearward into the seat back with the dummy's head rotating rearward contacting the head restraint. The dummy came to rest seated in the driver's seat.

Right Front Passenger Dummy

Upon impact, the right front passenger dummy translated forward on the seat impacting both knees into the instrument panel. The dummy's head and chest impacted the airbag with the dummy's head rotating slightly to the left. The right front dummy was restrained by the passenger's airbag. The dummy rebounded rearward into the seat back as the dummy's head rotated slightly rearward contacting the head restraint. The dummy came to rest seated in the right front passenger's seat.

Table 7 FMVSS 208 Seat Belt Comfort and Convenience Test Summary

Front Outboard Designated Seating Positions

NHTSA number: CS0114

Vehicle model year/make/model/body style: 1995/Pontiac/Sunfire/4-door sedan

Date of comfort/convenience check: 02/01/95

Technician performing check: Markusic

GVWR: 3679 lb

Automatic seat belts installed in any vehicle, other than a walk-in van-type vehicle which has a gross vehicle weight rating of 10,000 pounds or less, and is manufactured on or after September 1, 1986, shall meet the requirements for convenience hooks, webbing tension-relieving devices, and belt contact force.

Manual seat belts installed for compliance with this standard in front outboard designated seating positions of any vehicle, other than a walk-in van-type vehicle which has a gross vehicle rating of 10,000 pounds or less, and is manufactured after September 1, 1989, shall meet the requirements for belt contact force, plate access, retraction and seat belt guides, and hardware.

Vehicle Equipment:

The vehicle's front outboard seating positions were equipped with manual Type 2 seat belts which must comply with the dynamic test requirements of S5.1; requirements for webbing tension-relieving devices (S7.4.2), belt contact force (S7.4.3), latchplate access (S7.4.4), retraction (S7.4.5), and seat belt guides and hardware (S7.4.6) apply.

Convenience Hooks (S7.4.1):

Not applicable, the vehicle was not equipped with automatic seat belts.

Table 7 FMVSS 208 Seat Belt Comfort and Convenience Test Summary

Front Outboard Designated Seating Positions, Cont'd.

NHTSA number: CS0114

Vehicle model year/make/model/body style: 1995/Pontiac/Sunfire/4-door sedan

Date of comfort/convenience check: 02/01/95

Technician performing check: Markusic

GVWR: 3679 lb

Webbing Tension-Relieving Device (S7.4.2):

The front outboard seating position assemblies do not have webbing tension-relieving devices.

Belt Contact Force (S7.4.3):

The belt contact force on the chest of the test dummy is 0.2 pounds.

Latchplate Access (S7.4.4):

The seat belt latchplates, in their normal stowed position, are within the reach envelope.

The clearance test block moves unhindered to the latchplate or buckle.

Retraction (S7.4.5):

The seat belt automatically retracts when the seat belt latchplate is released.

The stowed seat belt webbing and hardware are not pinched when the door is closed.

Table 7 FMVSS 208 Seat Belt Comfort and Convenience Test Summary

Front Outboard Designated Seating Positions, Cont'd.

NHTSA number: CS0114

Vehicle model year/make/model/body style: 1995/Pontiac/Sunfire/4-door sedan

Date of comfort/convenience check: 02/01/95

Technician performing check: Markusic

GVWR: 3679 lb

Seat Belt Guides and Hardware (S7.4.6):

The seat cushion is not removable.

The seat back does not serve a function other than seating.

The seat is not removable.

The seat is movable but the space formerly occupied by the seat cannot be used for a secondary function.

Note: If the seat or seat cushion is removable or if the seat is movable so the space formerly occupied by the seat can be used for a secondary function, the seat belt guides and hardware requirements do not apply.

The webbing is not designed to pass through the seat cushion or between the cushion and seat back.

The restraint system does not include webbing guides.

The inboard receptacle end of the outboard seating position's seat belt is accessible without moving the center arm rest.

Table 8 FMVSS 208 Equipment Data

FMVSS 208 Seat Belt Warning System Data

With an occupant in the driver's position and the unbelt in stowed position and ignition switch placed in the "start/on" position the duration of audible warning signal is 6 s and the reminder light operates continuously for 20 s, then flashes continuously thereafter.

With an occupant in the driver's position and the unbelt in use and the ignition switch placed in the "start/on" position the duration of audible warning signal is 0 s and the duration of the reminder light operation is 0 s.

NOTE: the audible warning should not operate.

The wording of the visual seat belt warning is the symbol from Table 2 of FMVSS 101.

Table 8 FMVSS 208 Equipment Data, Cont'd.

FMVSS 208 Labeling and Driver's Manual Data

The labels which describe the manufacturer's maintenance or replacement schedule for the crash-deployed occupant protection system were located on the driver's and passenger's sun visors.

No regular airbag maintenance is required.

Appropriate instructions concerning maintenance and/or replacement of this system were provided in the owner's manual on page 1-25

A description of the functional operation of the system was provided in the owner's manual on pages 1-19 through 1-24.

A reference to the instructions and description of the system was included on the label.

An owner's manual was provided.

The owner's manual contained appropriate information concerning maintenance and/or replacement and a description of the functional operation of the systems on pages 1-19 through 1-25.

Table 8 FMVSS 208 Equipment Data, Cont'd.

FMVSS 208 Readiness Indicator Data

The vehicle contained a crash-deployed occupant protection system which was not totally mechanical. The readiness indicator was a light stating "airbag" located on the right portion of the instrument cluster.

The readiness indicator was clearly visible to the driver.

A list of the elements in the occupant restraint system, being monitored by the readiness indicator was provided in the owner's manual on page 2-47

All rear outboard seating positions had Type 2 seat belts.

Figure 4 FMVSS 212 Test Data

Details of windshield mounting such as retention method, trim type, etc.:

Plastic trim around outer perimeter and adhesive around inner perimeter.


Clips or brackets used to retain windshield: None

FMVSS 212 requirements: The post-test periphery retention amount must be at least 75% of the pre-test periphery measurement for vehicles NOT equipped with automatic restraints, and 50% for each side of windshield for vehicles equipped with automatic restraint systems for front occupants.

Windshield periphery measurements:

	Pre-test	Post-test	Percent Retention
Right side	80.0 in	80.0 in	100.0
Left side	80.0 in	80.0 in	100.0
Total	160.0 in	160.0 in	100.0

Pre-test windshield mounting material temperature: 66° F

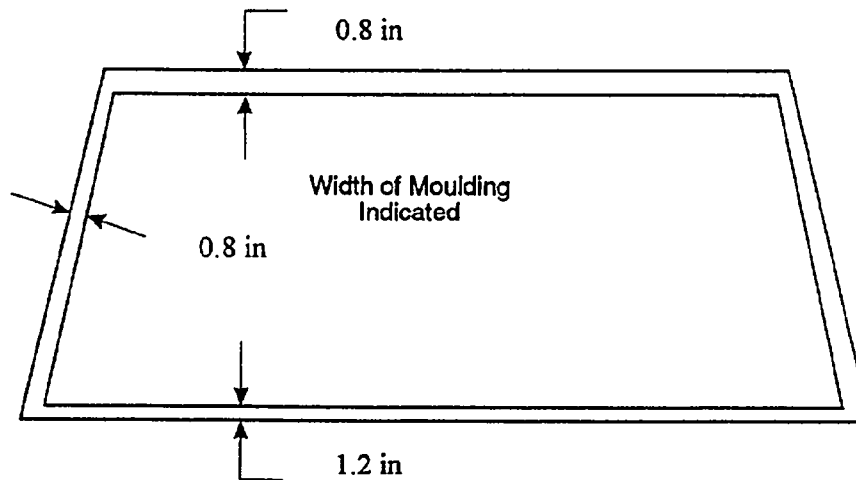

Front view of windshield¹

Loss of windshield retention lengths: None

¹ Indicate areas of loss of retention, if any, on windshield diagram.

Figure 5 FMVSS 219 Test Data

Protected zone lower edge requirement:

The lower edge of the protected zone is determined by placing a 6.5-inch diameter rigid sphere weighing 15 pounds in a position such that it simultaneously contacts the inner surface of the windshield and the top surface of the instrument panel including padding. Draw the locus of points on the inner surface of the windshield contactable by the sphere across the width of the instrument panel. From the outermost contactable points, extend the locus line horizontally to the edges of the windshield, and then draw a line on the inner surface of the windshield below and 0.5 inch from the locus line. The LOWER EDGE OF THE PROTECTED ZONE is the longitudinal projection onto the outer surface of the windshield of this line.

Windshield measurements:

A: 42.6 in


B: 18.7 in

C: 59.2 in

D: 33.0 in

E: 21.4 in

F: 21.1 in

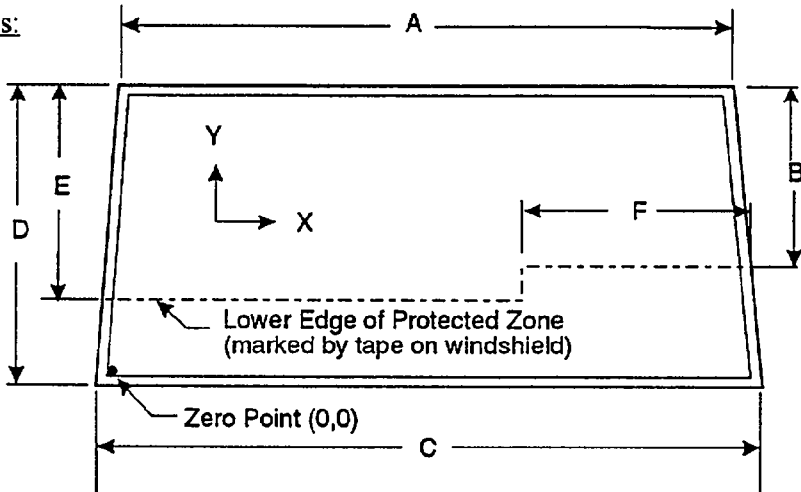

FRONT VIEW

Method of adhering protected zone template to windshield:

NA

Areas of windshield template penetration greater than 0.25 in:

NA

Coordinates

X Y

- 1.
- 2.
- 3.

Areas of windshield penetration, below the protected zone, through the inner surface of the windshield:

None

- 1.
- 2.
- 3.

Table 9 Fuel System Data

Vehicle year/make/ model/body style:	1995/Pontiac/Sunfire/4-door sedan
NHTSA number:	CS0114
Fuel system capacity:	15.2 gal (from owner's manual)
Usable capacity:	15.2 gal (furnished by COTR)
Test volume range:	14.0 gal to 14.3 gal (92-94% of usable)
Actual test volume:	14.1 gal (with entire fuel system filled)
Test fluid type:	Stoddard solvent
Specific gravity:	0.764
Kinematic viscosity:	0.99 centistoke
Test fluid color:	purple
Type of fuel pump:	electric

The electric fuel pump does not operate with ignition switch "on" and the engine not operating.

Details of fuel system:

The fuel tank is located in front of the rear axle. The fuel filler neck is located on the right side.

The fuel lines run along the right side to the front.

Table 10 FMVSS 301 Post-Impact Test Data

NHTSA number: CS0114
Test date: 02/01/95
Vehicle year/make/
model/body style: 1995/Pontiac/Sunfire/4-door sedan

Test requirements:

Test vehicle fuel tank filled to 92 to 94% of manufacturer's usable capacity and with electric fuel pump operating (if it will operate without engine operation). Part 572 test dummies located at each front designated seating position.

Test vehicle impact type:

- ☒ Frontal (30 mph)
☐ Oblique (30 mph) with ___° barrier face first contacting (driver's/passenger's) side
☐ Rear moving barrier (30 mph)
☐ Lateral moving barrier (20 mph)

Fuel system fluid spillage measurements:


	Test Results	Maximum Allowable
1. From impact until vehicle motion ceases	0 oz	1 oz
2. 5-Minute period after vehicle motion ceases	0 oz	5 oz
3. Next 25 minutes after 5-minute period	0 oz	1 oz/1 min

Fuel system fluid spillage location(s): None

Figure 6 FMVSS 301 Static Rollover Test Data

NHTSA number: CS0114

Test phase

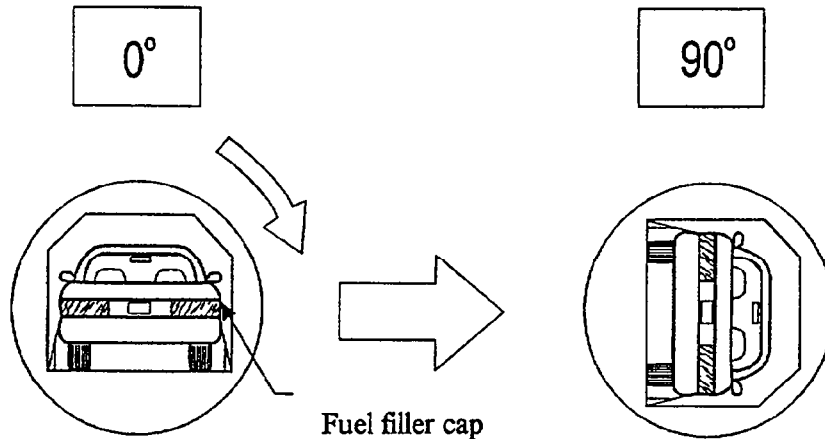

Static rollover machine rotation time information: (specified range is 1-3 minutes)

Time required for machine to rotate 90° = 2 minutes, 0 seconds

FMVSS 301 position hold time = 5 minutes, 0 seconds

Total = 7 minutes, 0 seconds

Next whole minute interval = 7 minutes


Fuel system fluid spillage measurements:

	Test Results	Maximum Allowable
<u>0° to 90° rotation (fuel filler cap down)</u>		
1. First 5 minutes from onset of rotation	0 oz	5 oz
2. Sixth minute from onset of rotation	0 oz	1 oz
3. Seventh minute from onset of rotation	0 oz	1 oz

Fuel system fluid spillage location(s): None

Figure 6 FMVSS 301 Static Rollover Test Data, Cont'd.

Test phase

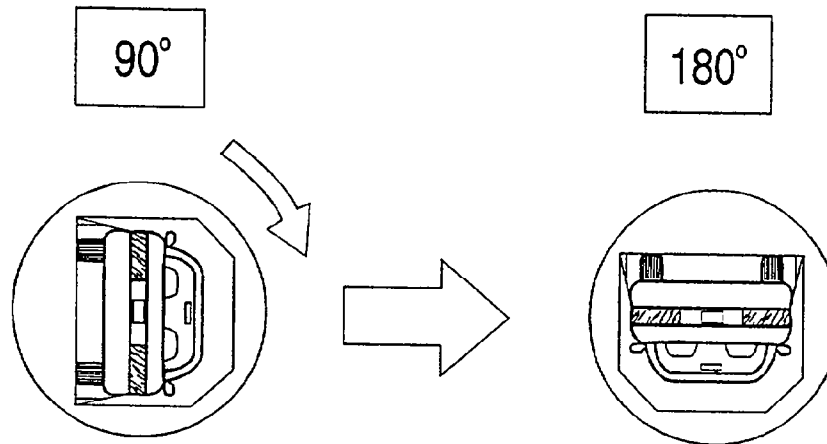

Static rollover machine rotation time information: (specified range is 1-3 minutes)

Time required for machine to rotate 90° = 2 minutes, 0 seconds

FMVSS 301 position hold time = 5 minutes, 0 seconds

Total = 7 minutes, 0 seconds

Next whole minute interval = 14 minutes


Fuel system fluid spillage measurements:

90° to 180° rotation	Test Results	Maximum Allowable
1. First 5 minutes from onset of rotation	0 oz	5 oz
2. Sixth minute from onset of rotation	0 oz	1 oz
3. Seventh minute from onset of rotation	0 oz	1 oz

Fuel system fluid spillage location(s): None

Figure 6 FMVSS 301 Static Rollover Test Data, Cont'd.

Test phase

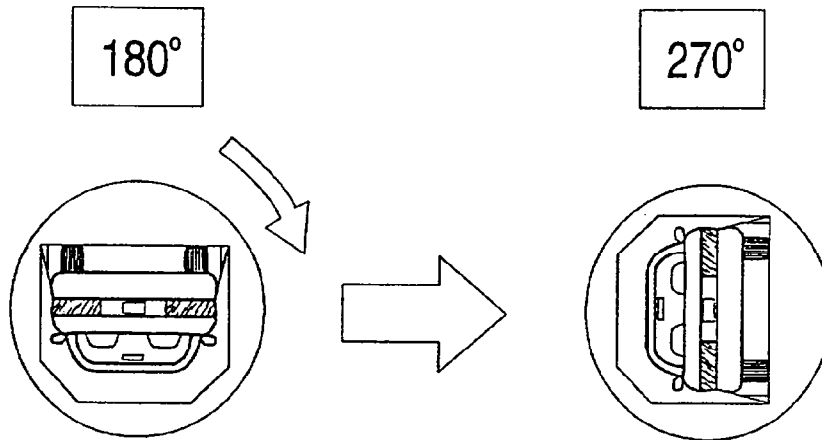

Static rollover machine rotation time information: (specified range is 1-3 minutes)

Time required for machine to rotate 90°	=	2 minutes,	0 seconds
FMVSS 301 position hold time	=	5 minutes,	0 seconds
Total	=	7 minutes,	0 seconds
Next whole minute interval	=	21 minutes	


Fuel system fluid spillage measurements:

<u>180 to 270° rotation</u>	<u>Test Results</u>	<u>Maximum Allowable</u>
1. First 5 minutes from onset of rotation	0 oz	5 oz
2. Sixth minute from onset of rotation	0 oz	1 oz
3. Seventh minute from onset of rotation	0 oz	1 oz

Fuel system fluid spillage location(s): None

Figure 6 FMVSS 301 Static Rollover Test Data, Cont'd.

Test phase

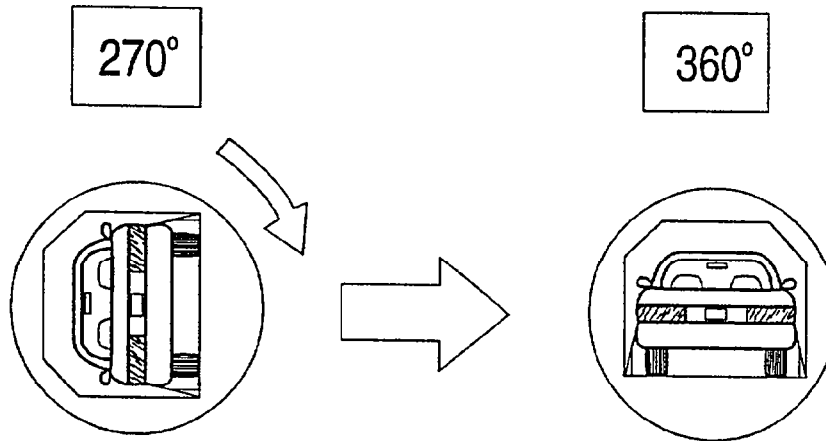

Static rollover machine rotation time information: (specified range is 1-3 minutes)

Time required for machine to rotate 90°	=	2 minutes,	0 seconds
FMVSS 301 position hold time	=	5 minutes,	0 seconds
Total	=	7 minutes,	0 seconds
Next whole minute interval	=	28 minutes	

Fuel system fluid spillage measurements:

<u>270° to 360° rotation</u>	<u>Test Results</u>	<u>Maximum Allowable</u>
1. First 5 minutes from onset of rotation	0 oz	5 oz
2. Sixth minute from onset of rotation	0 oz	1 oz
3. Seventh minute from onset of rotation	0 oz	1 oz

Fuel system fluid spillage location(s): None

Section 4.0

Vehicle, Occupant, and Camera Measurements

Figure 7 Pre-test and Post-test Measurement Points

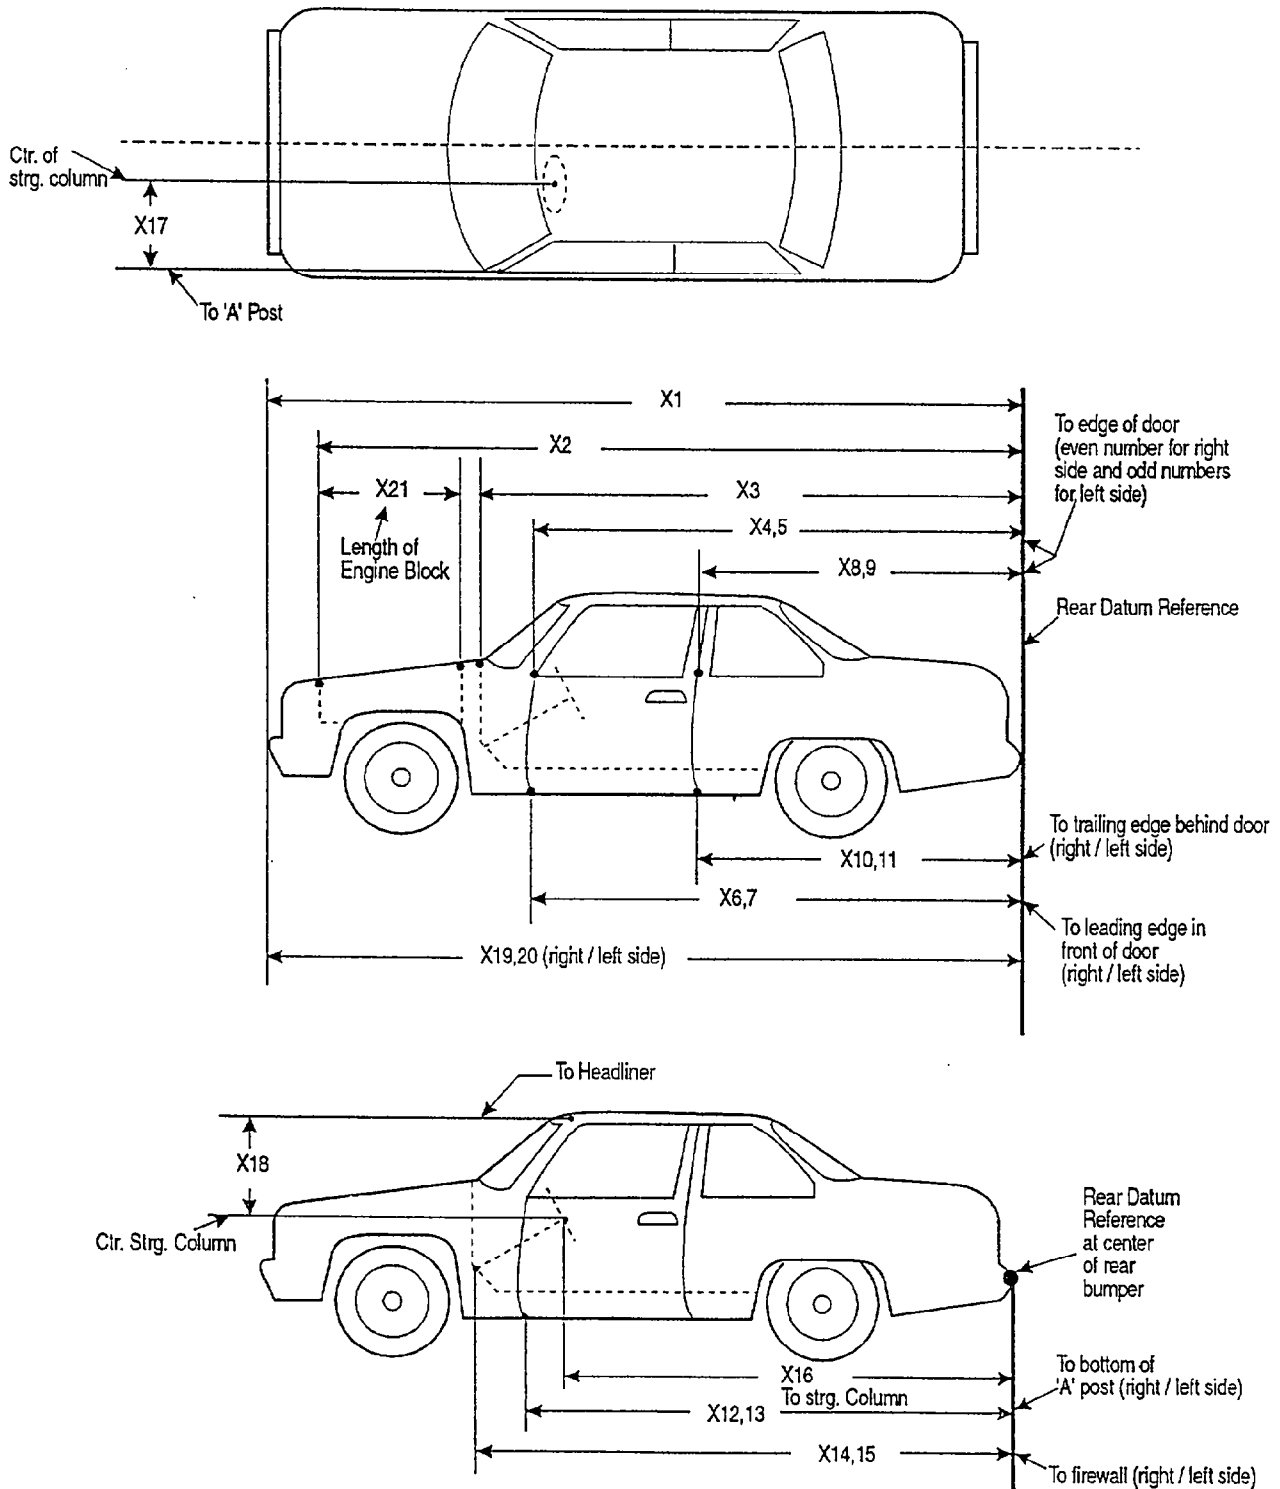


Table 11 Impacted Vehicle Measurements

Vehicle year/make/model/body style: 1995/Pontiac/Sunfire/4-door sedan Test Number: 950201

No.	Type of measurement	Pre-test	Post-test	Diff.
X1	Total length of vehicle at centerline	181.1 in	170.0 in	11.1 in
X2	Rear surface of vehicle to front of engine block	151.6 in	147.8 in	3.8 in
X3	Rear surface of vehicle to firewall	131.8 in	132.8 in	-1.0 in
X4	Rear surface of vehicle to upper leading edge of right door	121.8 in	121.9 in	-0.1 in
X5	Rear surface of vehicle to upper leading edge of left door	121.3 in	121.8 in	-0.5 in
X6	Rear surface of vehicle to lower leading edge of right door	121.6 in	121.6 in	0.0 in
X7	Rear surface of vehicle to lower leading edge of left door	121.2 in	121.2 in	0.0 in
X8	Rear surface of vehicle to upper trailing edge of right door	81.0 in	81.0 in	0.0 in
X9	Rear surface of vehicle to upper trailing edge of left door	80.7 in	81.0 in	-0.3 in
X10	Rear surface of vehicle to lower trailing edge of right door	80.4 in	80.2 in	0.2 in
X11	Rear surface of vehicle to lower trailing edge of left door	80.3 in	80.5 in	-0.2 in
X12	Rear surface of vehicle to bottom of "A" post on right side	120.4 in	120.3 in	0.1 in
X13	Rear surface of vehicle to bottom of "A" post on left side	120.7 in	120.8 in	-0.1 in
X14	Rear surface of vehicle to firewall - right side	135.8 in	133.7 in	2.1 in
X15	Rear surface of vehicle to firewall - left side	137.8 in	136.3 in	1.5 in
X16	Rear surface of vehicle to steering wheel center	102.6 in	108.8 in	-6.2 in
X17	Center of steering column to "A" post	10.7 in	10.0 in	0.7 in
X18	Center of steering column to headliner	16.2 in	14.3 in	1.9 in
X19	Rear surface of vehicle to right side of front bumper	175.2 in	164.0 in	11.2 in
X20	Rear surface of vehicle to left side of front bumper	174.2 in	164.1 in	10.1 in
X21	Length of engine block	18.0 in	18.0 in	0.0 in

Figure 8 Vehicle Target Locations

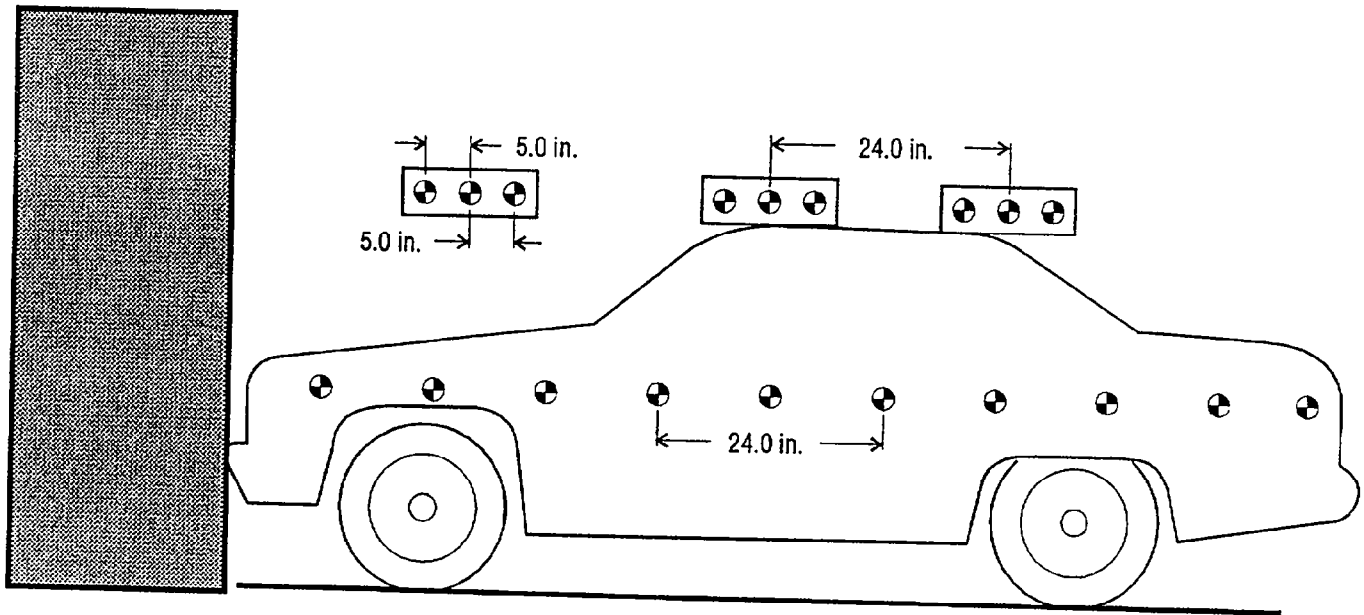


Figure 9 Dummy Measurement Locations for Front Seat Occupants

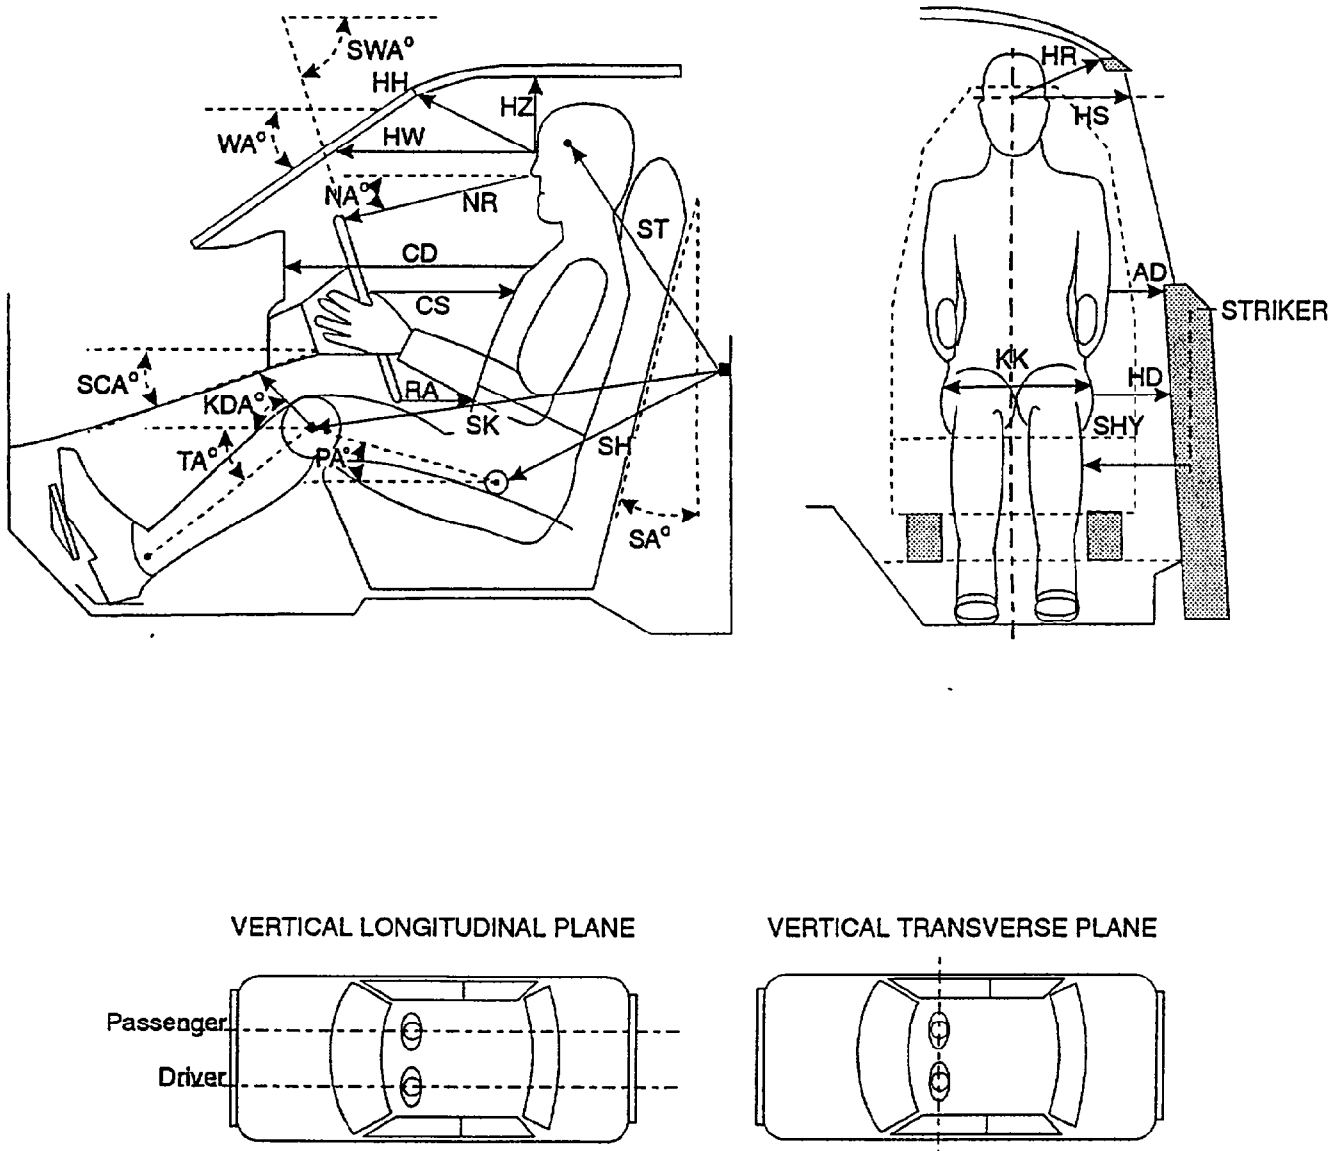


Table 12 Dummy Measurement Data for Front Seat Occupants

<u>Designation</u>	<u>Type of Measurement</u>	<u>Driver (Serial #230)</u>	<u>Passenger (Serial #229)</u>
WA	Windshield angle	24°	24°
SWA	Steering wheel angle	69°	NA
SCA	Steering column angle	21°	NA
SA	Seat back angle	28°	28°
HZ	Head to roof	6.9 in	6.8 in
HH	Head to header	11.5 in	12.0 in
HW	Head to windshield	21.8 in	22.0 in
HR	Head to side header	6.9 in	7.2 in
NR	Nose to rim	16.2 in	NA
NA	Nose to rim angle	18°	NA
CD	Chest to dash	21.9 in	21.2 in
CS	Steering wheel to chest	12.3 in	NA
RA	Rim to abdomen	7.6 in	NA
KDL	Left knee to dash	6.1 in	6.6 in
KDR	Right knee to dash	5.6 in	6.3 in
KDA	Outboard knee to dash angle	34°	20°
PA	Pelvic angle	24°	24°
TA	Tibial angle	38°	41°
KK	Knee to knee	13.6 in	10.3 in
ST ¹	Striker to head	19.0 in	19.5 in
	Striker to head angle	-94°	-81°
SK ¹	Striker to knee	23.1 in	23.4 in
	Striker to knee angle	5°	3°
SH ¹	Striker to H-point	11.6 in	10.2 in
	Striker to H-point angle	40°	37°
SHY	Striker to H-point (Y dir.)	10.1 in	9.9 in
HS	Head to side window	12.0 in	12.3 in
HD	H-point to door	6.0 in	5.9 in
AD	Arm to door	3.9 in	4.2 in

The seat back angle (SA°) is measured relative to vertical, all other angles are measured relative to horizontal.

¹ A negative angle indicates the measurement point was located above the striker.

Figure 10 Camera Positions

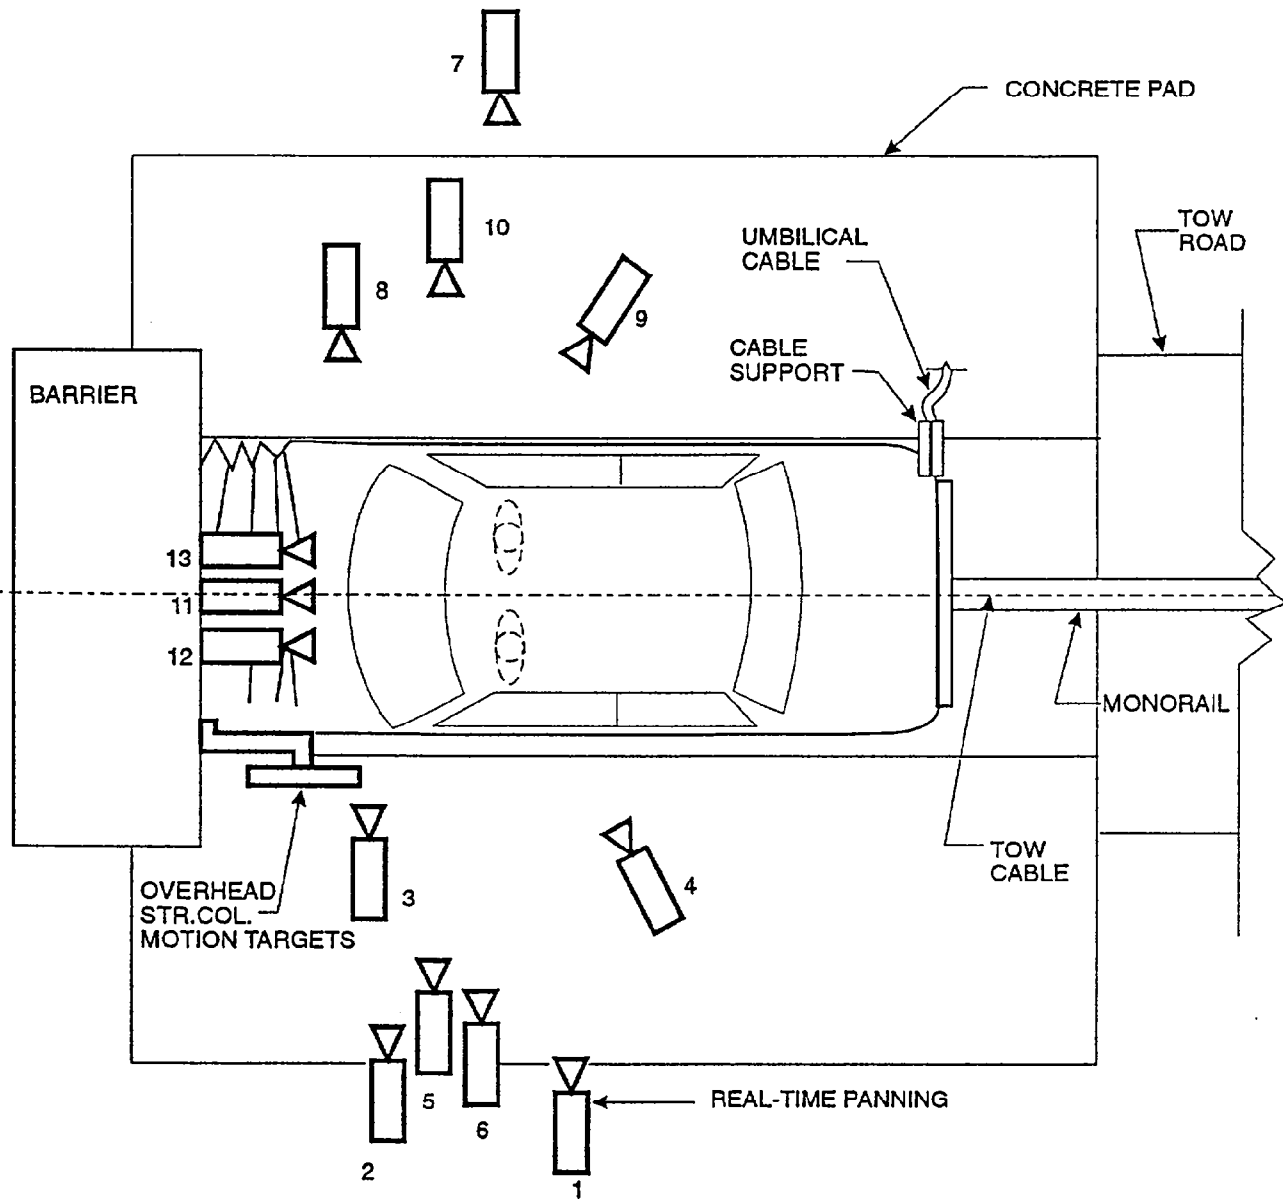


Figure 10 Camera Positions, Cont'd.

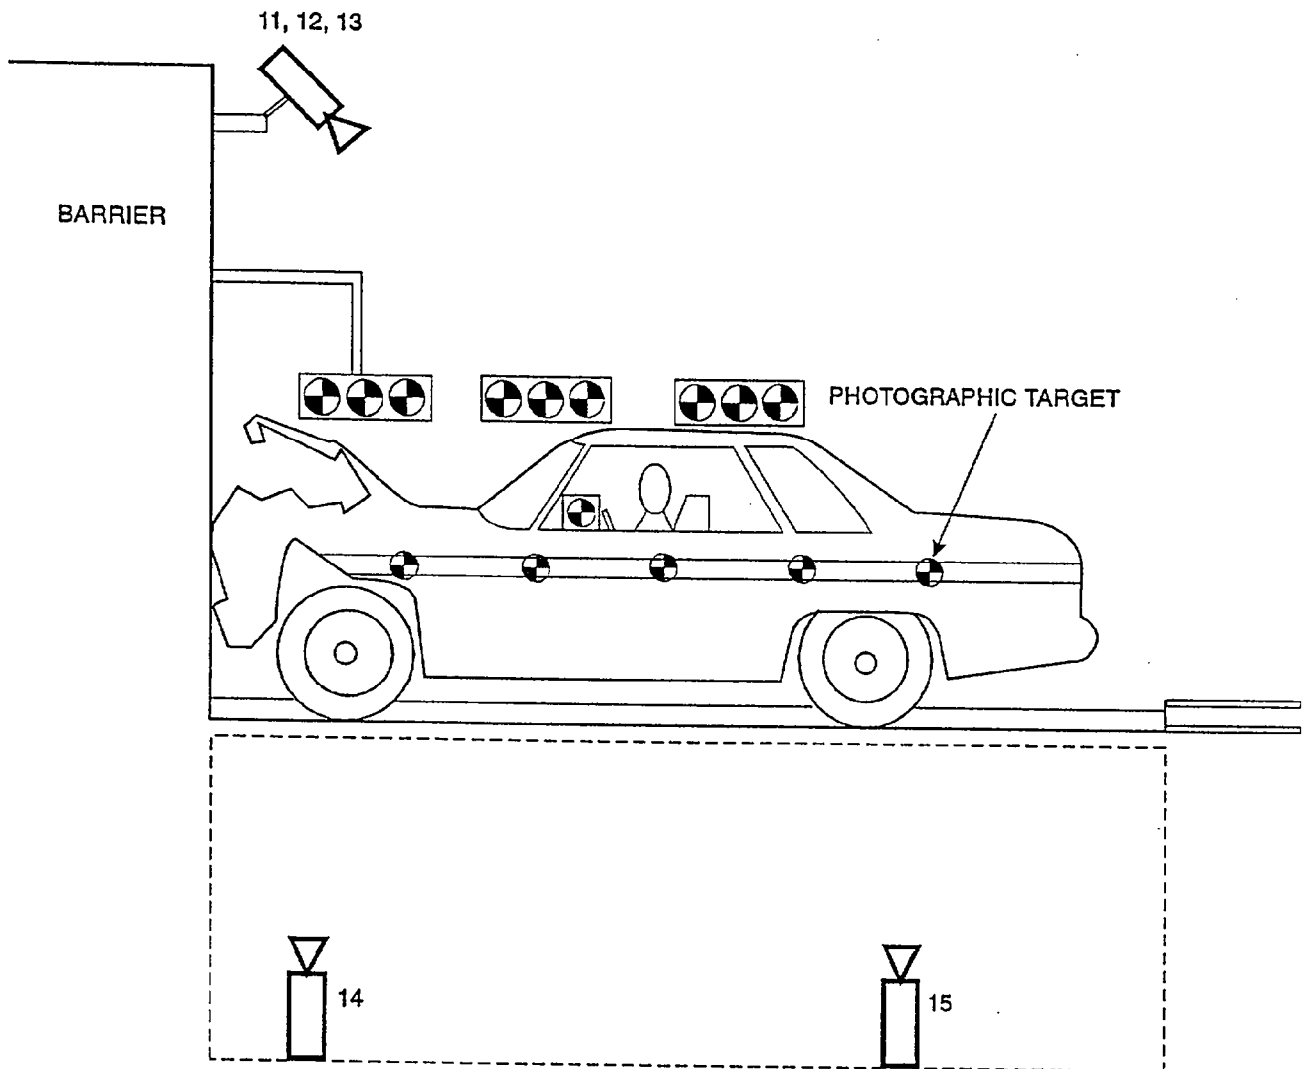


Table 13 Motion Picture Camera Locations

Vehicle year/make/model/body style: 1995/Pontiac/Sunfire/4-door sedan
Test Number: 950201

Camera Number	View	Camera Positions ¹			Camera Angle ²	Film Plane to Head Target	Camera Lens	Film Speed
		X	Y	Z				
1	Real-time panning	-142.0 in	504.0 in	61.0 in	NA	NA	16 mm	24 frames/s
2	Left vehicle crush	-41.5 in	295.0 in	44.0 in	-4°	298.0 in	25 mm	1002 frames/s
3	Left windshield intrusion	-53.0 in	309.4 in	42.3 in	0°	NA	50 mm	1008 frames/s
4	Driver kinematics	-157.3 in	116.0 in	87.0 in	-27°	100.0 in	25 mm	1000 frames/s
5	Steering column motion	-84.0 in	286.0 in	103.0 in	-14°	NA	25 mm	1000 frames/s
6	Steering column motion	-84.0 in	286.0 in	75.1 in	-9°	NA	25 mm	1002 frames/s
7	Right overall	-81.3 in	-266.4 in	37.1 in	-2°	NA	13 mm	1000 frames/s
8	Right windshield intrusion	-38.1 in	-306.1 in	44.0 in	0°	NA	50 mm	998 frames/s
9	Passenger kinematics	-152.1 in	-116.0 in	87.0 in	-26°	83.0 in	25 mm	992 frames/s
10	Passenger kinematics	-38.8 in	-293.0 in	45.3 in	-4°	225.0 in	25 mm	998 frames/s
11	Windshield front view	-6.0 in	0.0 in	88.0 in	-40°	NA	13 mm	995 frames/s
12	Driver - front view	-6.8 in	14.5 in	93.0 in	-50°	NA	17 mm	1005 frames/s
13	Passenger - front view	-4.5 in	-13.8 in	93.0 in	-50°	NA	17 mm	1008 frames/s
14	Pit - front position	-50.5 in	0.0 in	-92.4 in	90°	NA	13 mm	1000 frames/s
15	Pit - rear position	-99.3 in	0.0 in	-99.0 in	90°	NA	13 mm	1000 frames/s
16	Real-time documentation	NA	NA	NA	NA	NA	12-120 mm	24 frames/s

¹ +X: Film plane forward of barrier face

+Y: Film plane to left of monorail centerline

+Z: Film plane above ground level

² +Angle: Film plane angled upward from horizontal plane

Appendix A

Photographs

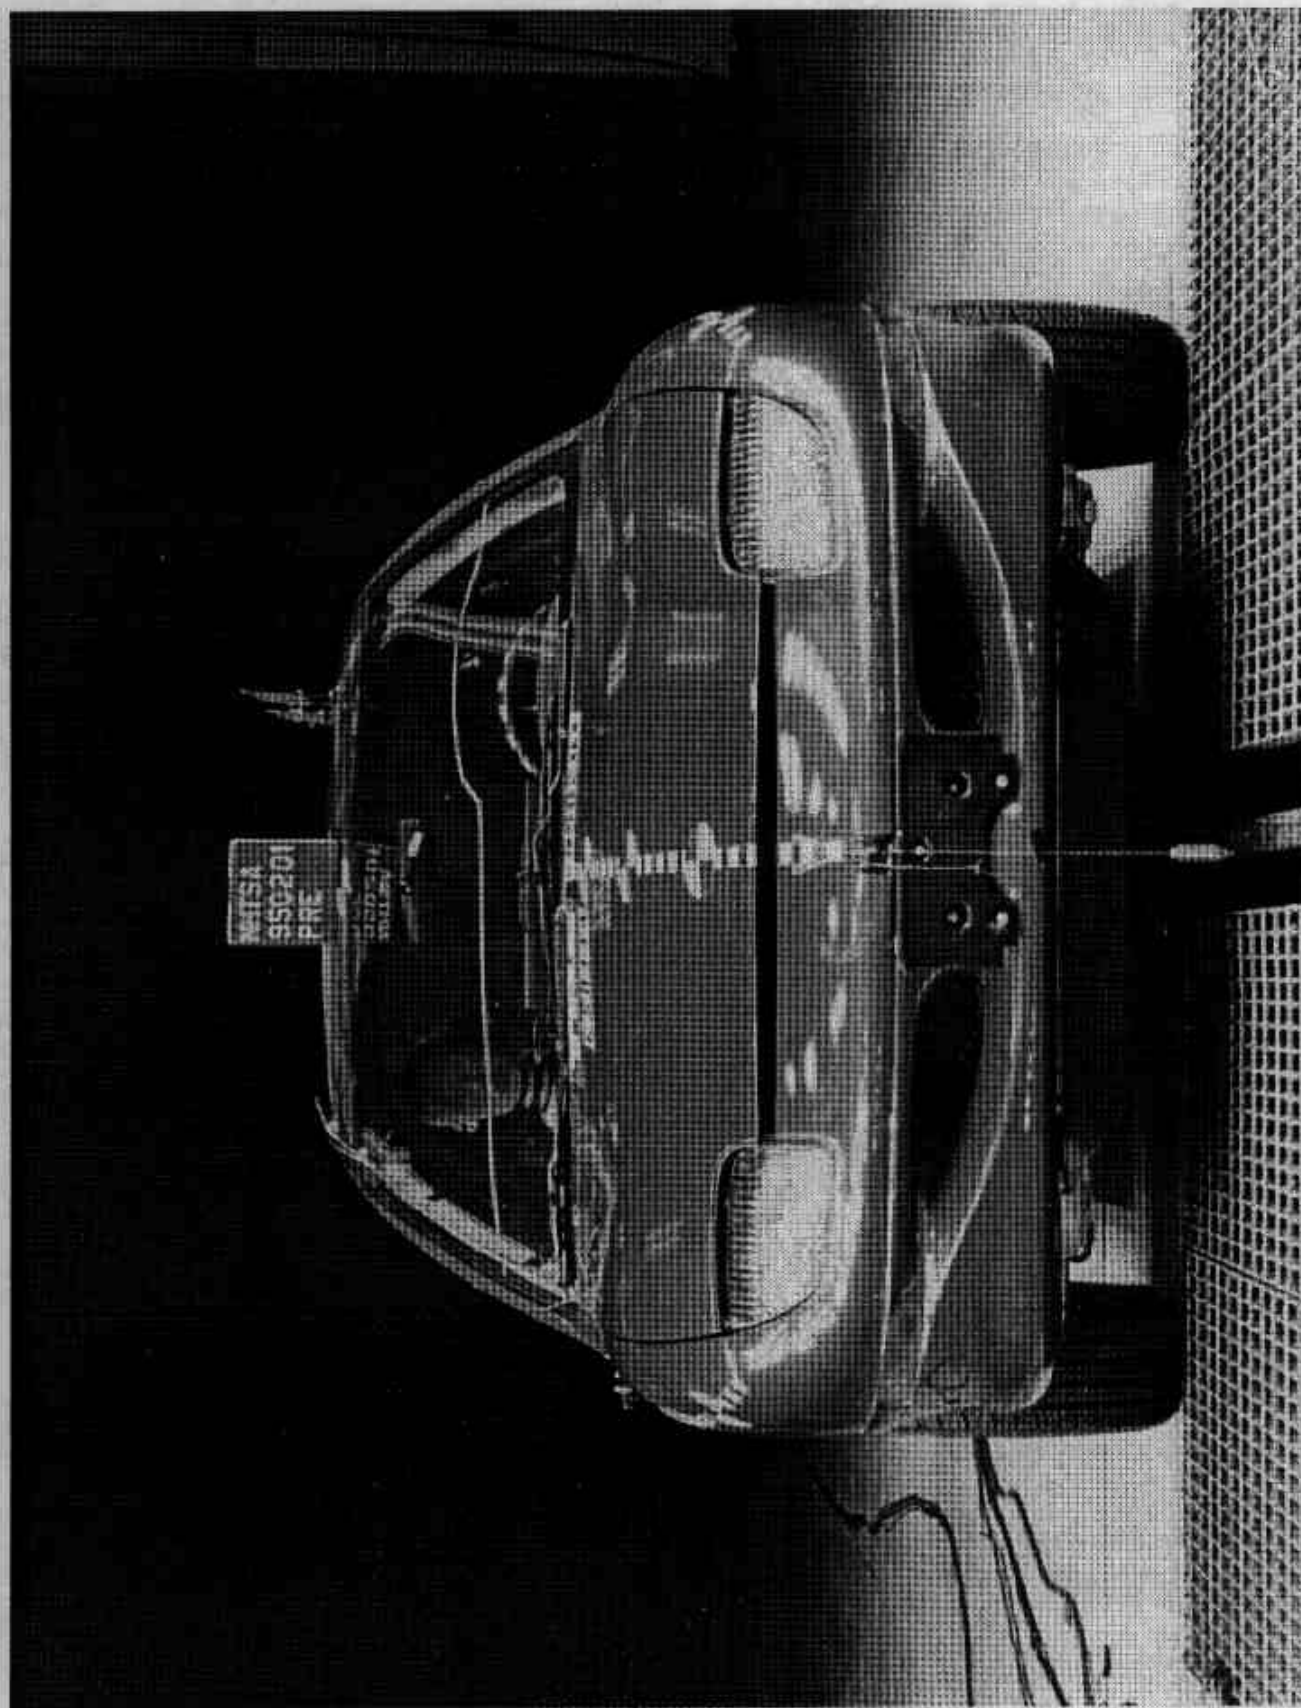


Figure A-1. Pre-Test Front View
A-2

950201

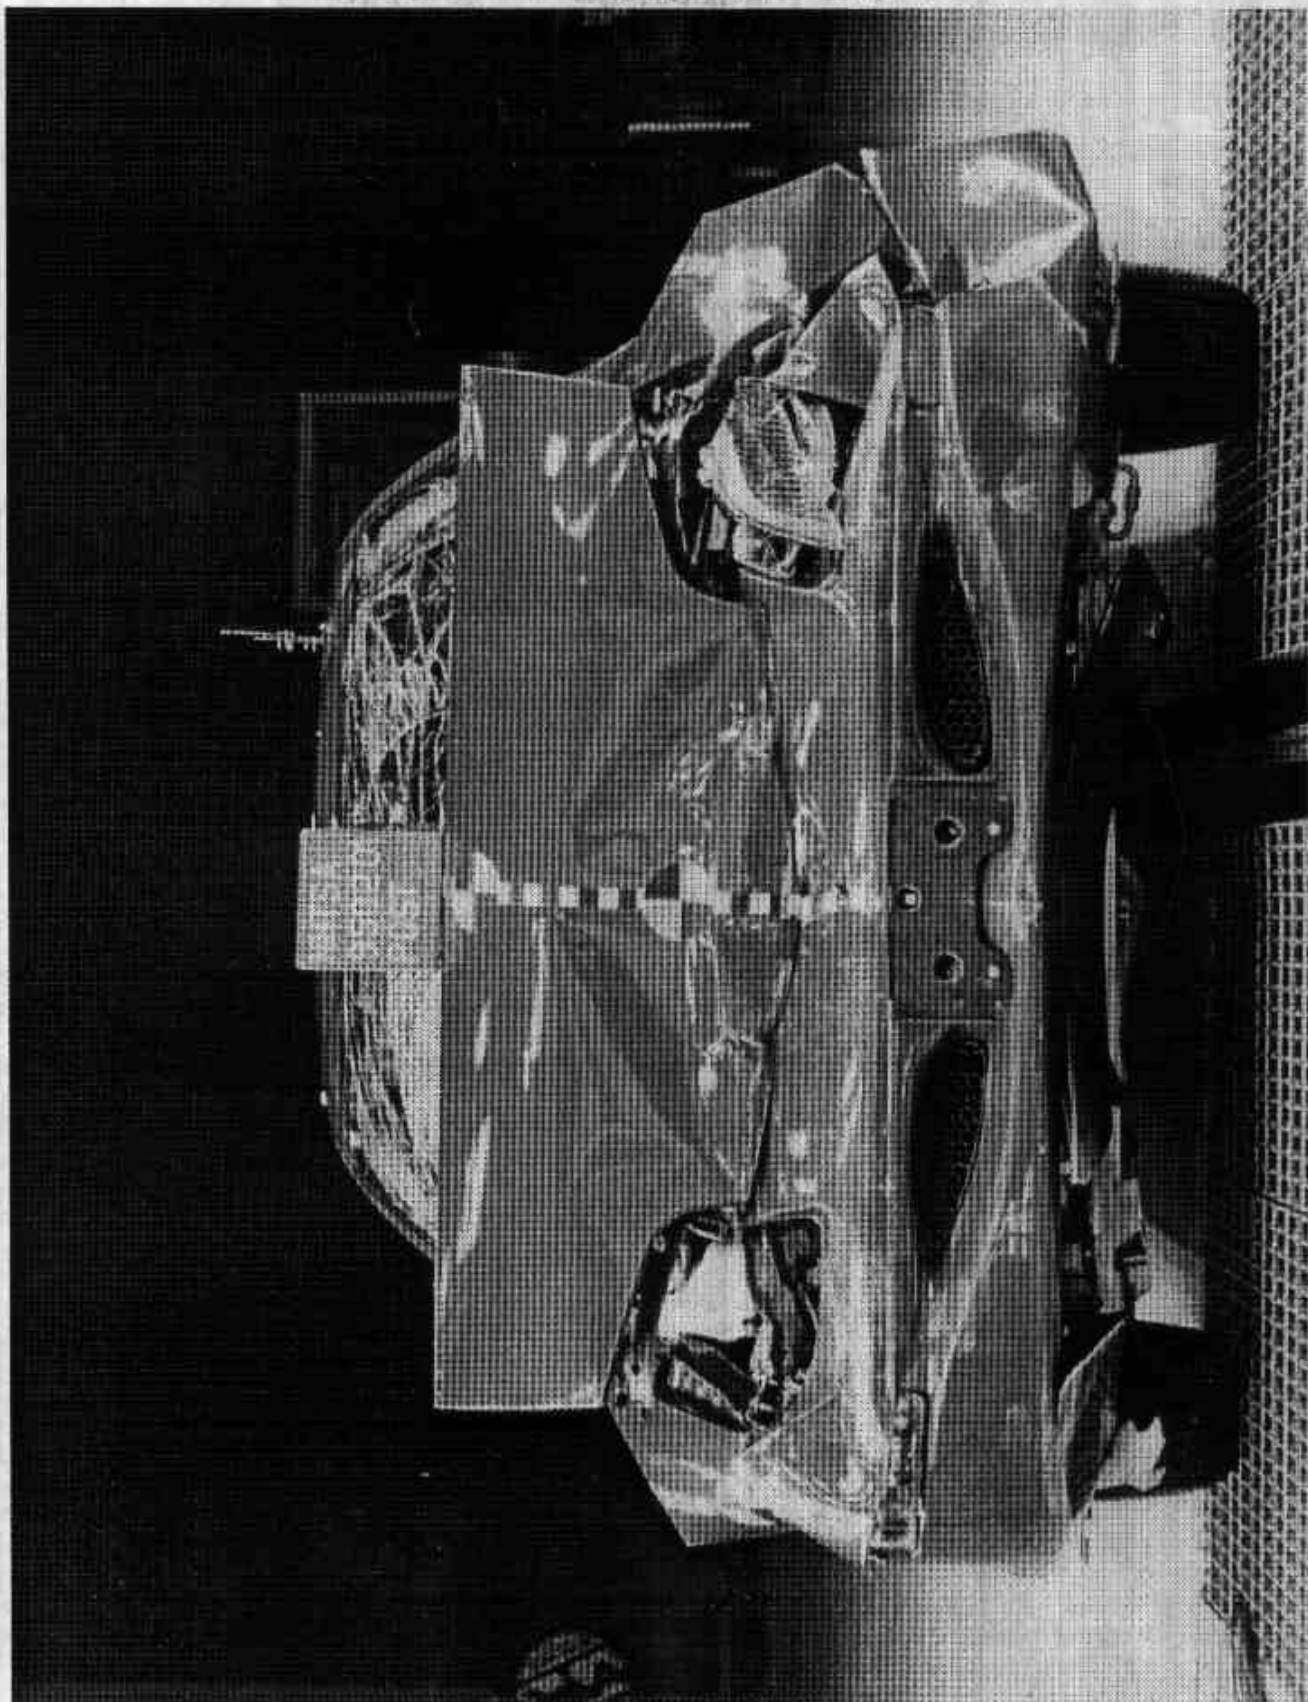


Figure A-2. Post-Test Front View
A-3

950201

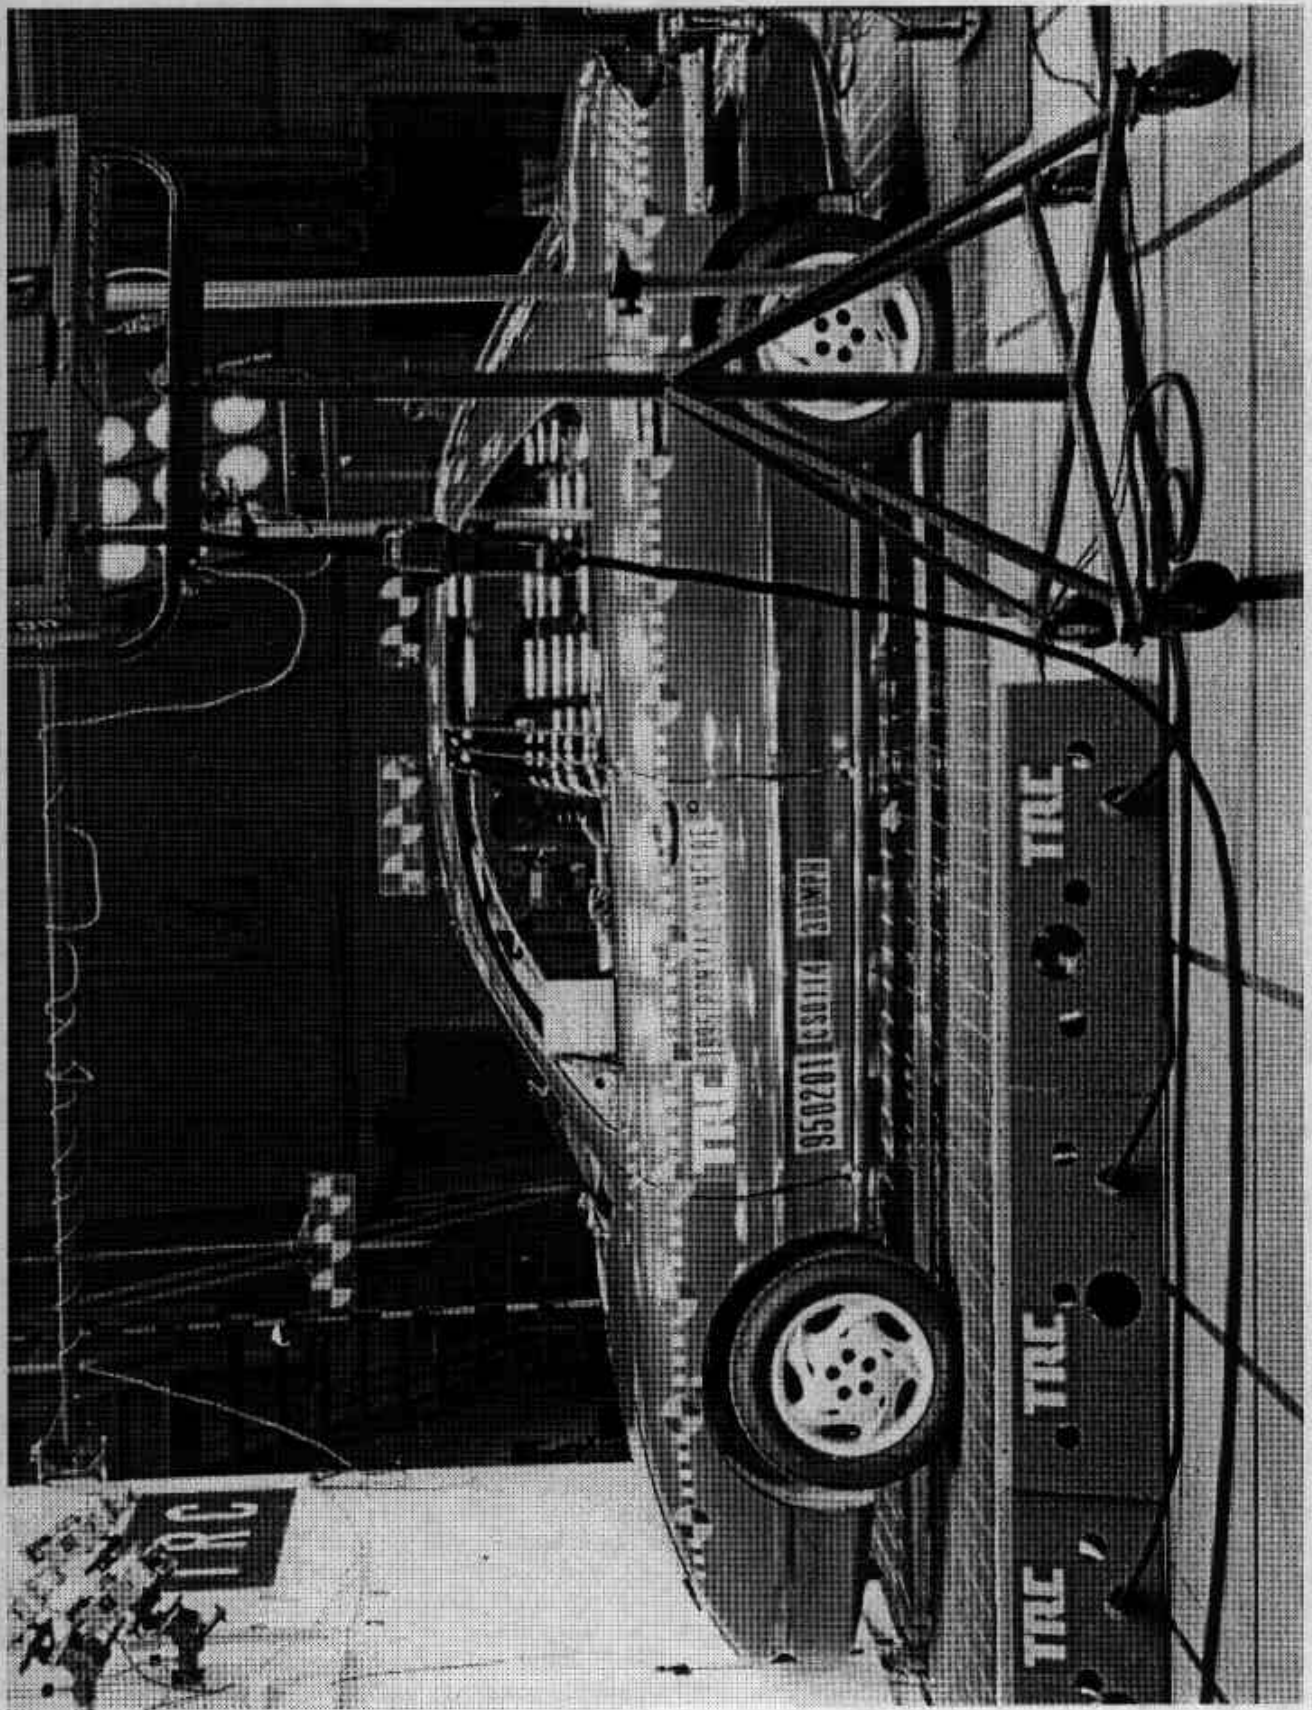


Figure A-3. Pre-Test Left Side View
A-4

950201

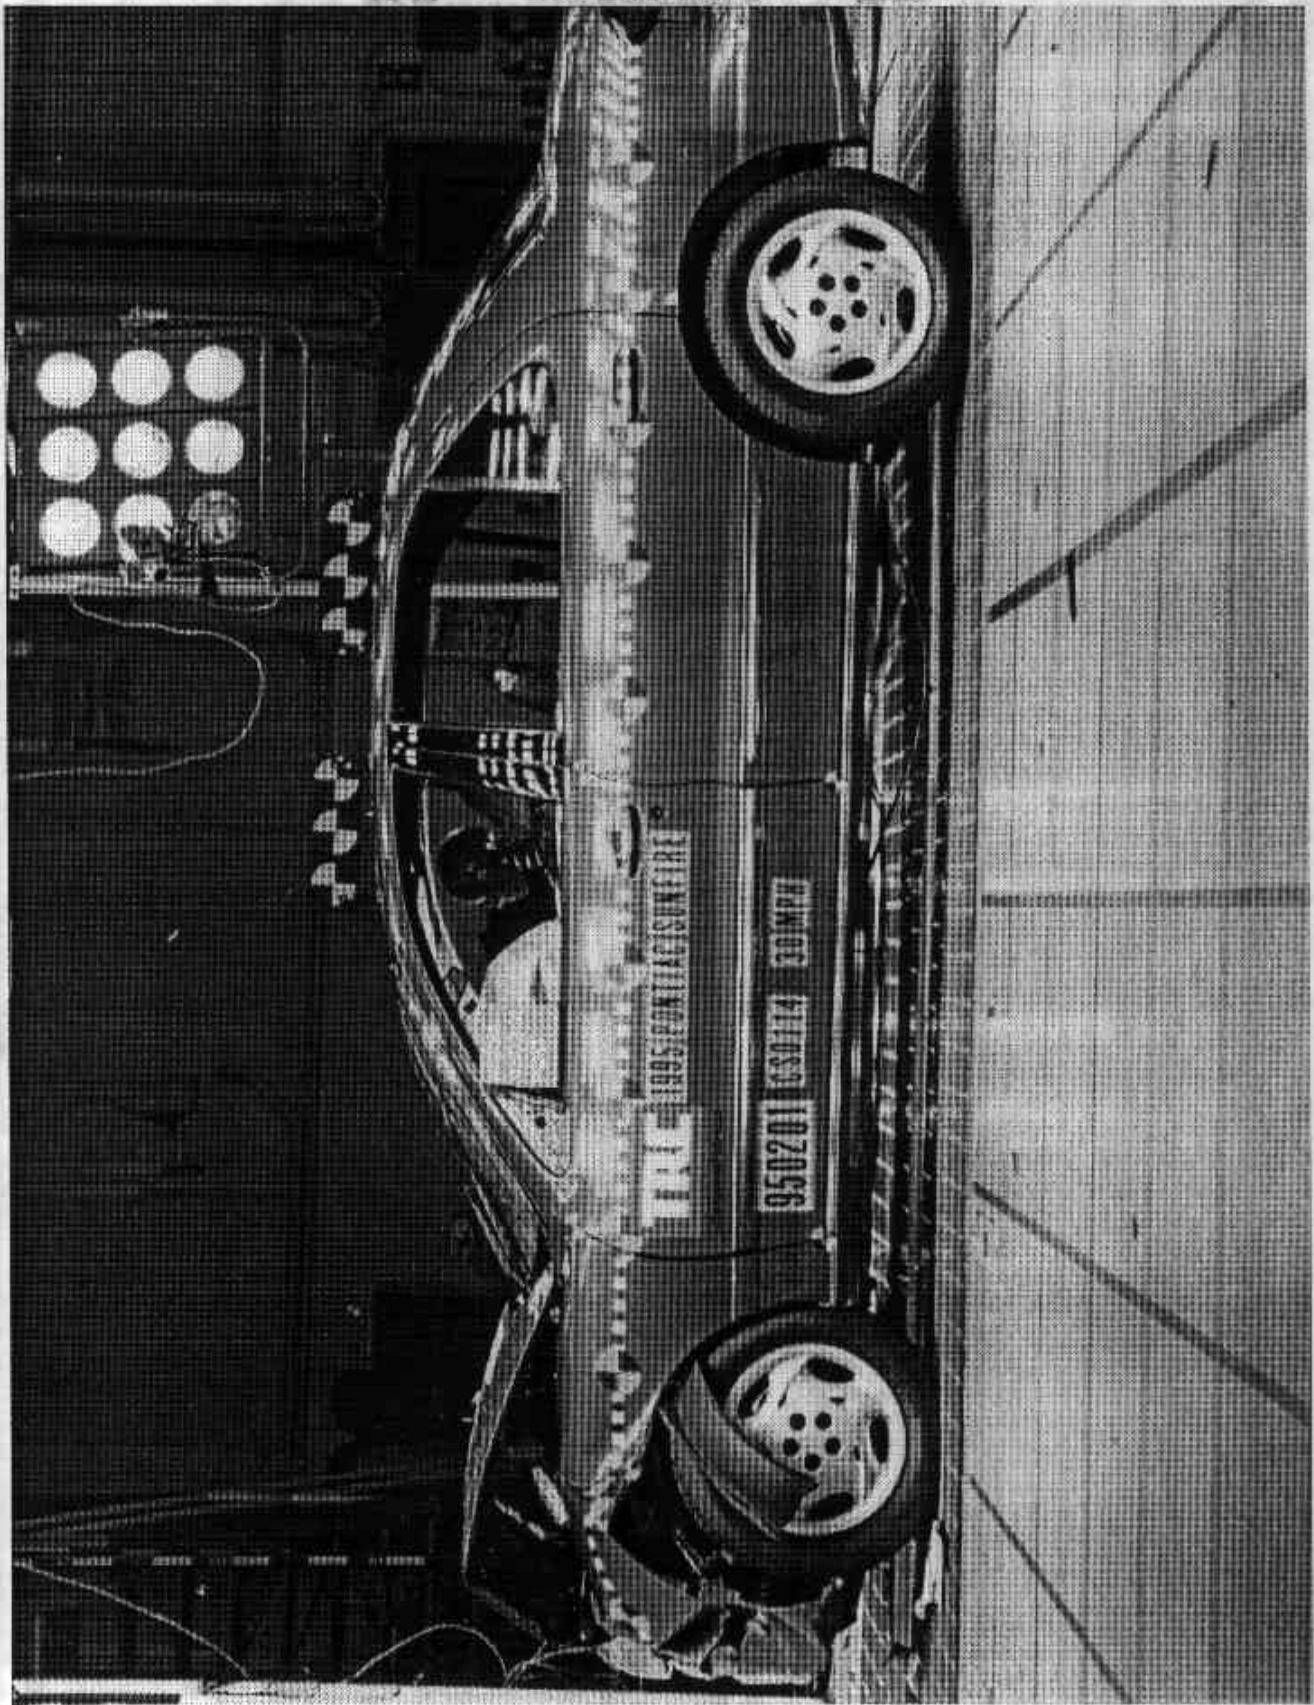


Figure A-4. Post-Test Left Side View
A-5

950201

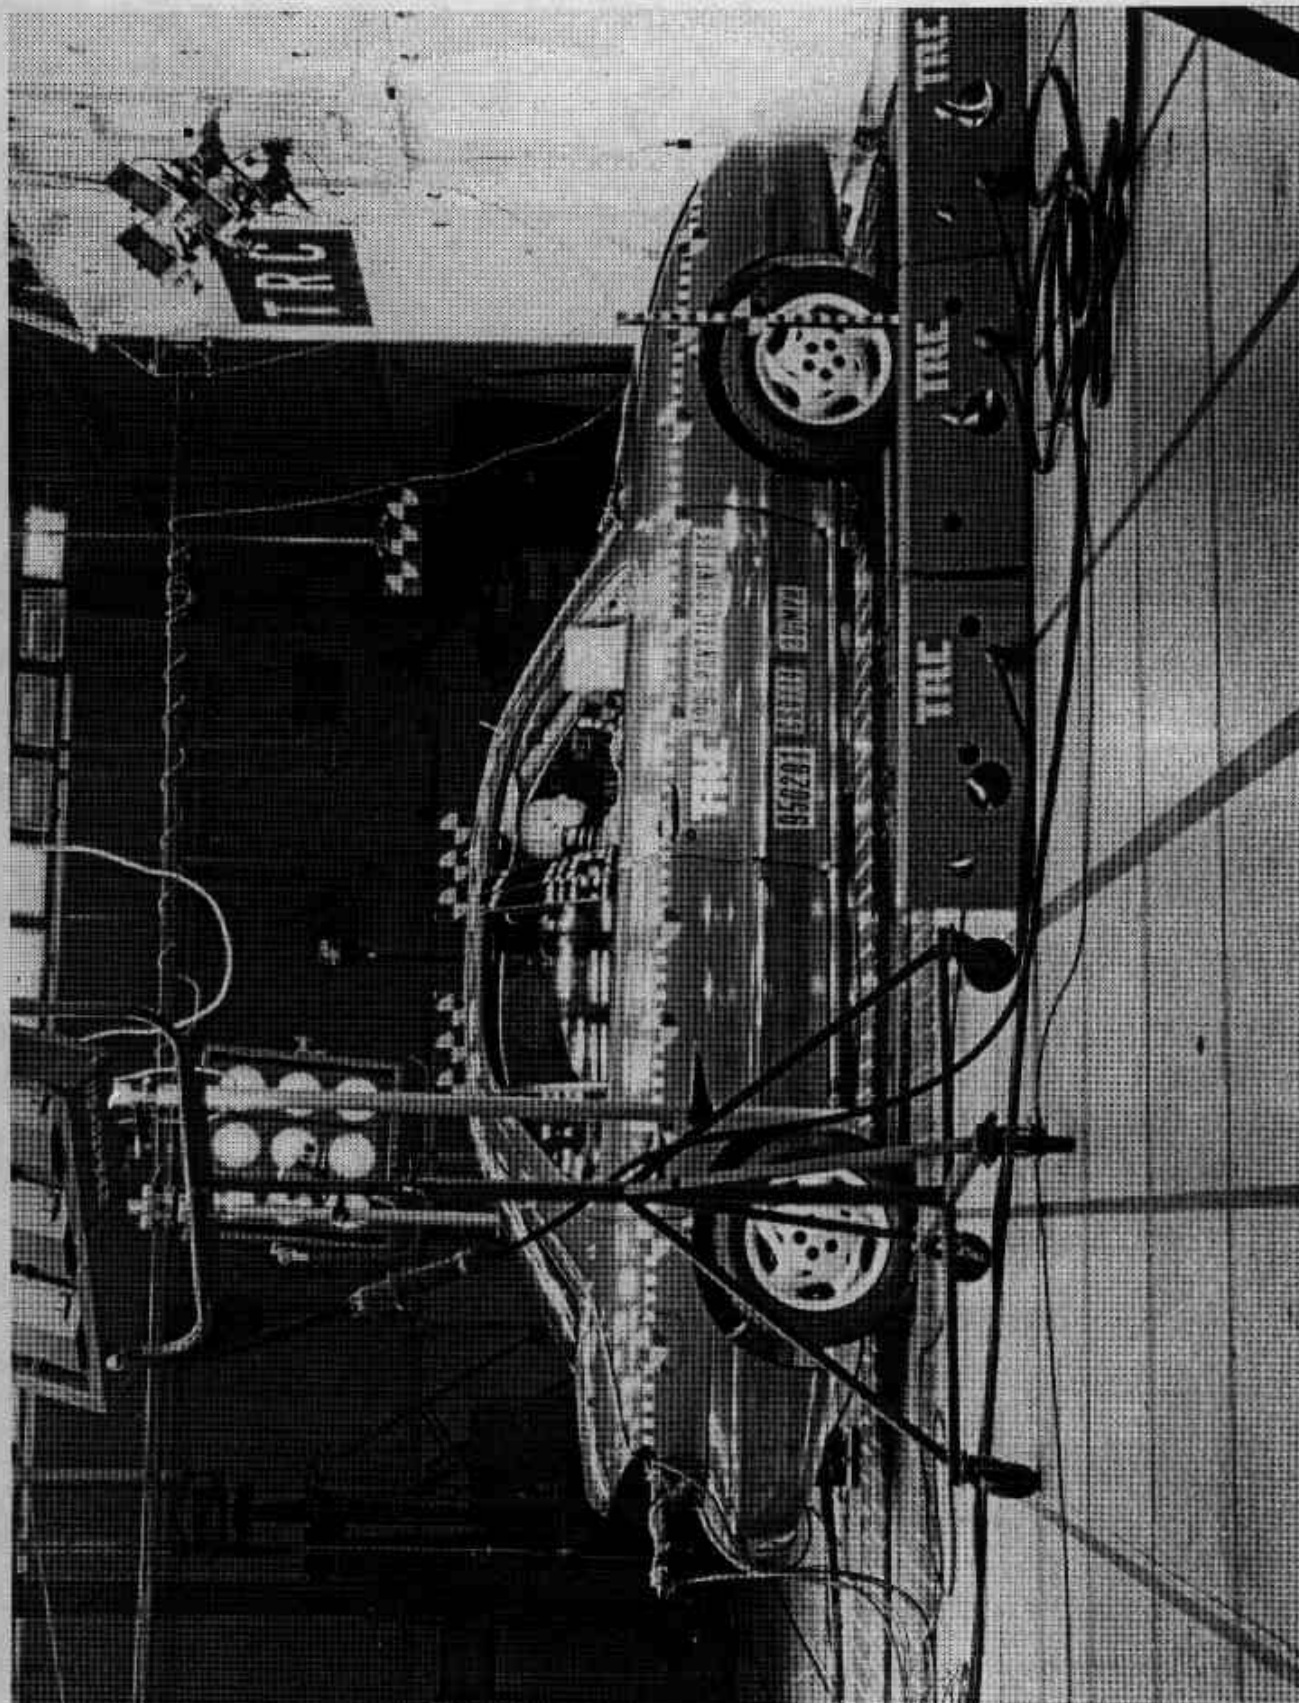


Figure A-5. Pre-Test Right Side View
A-6

950201

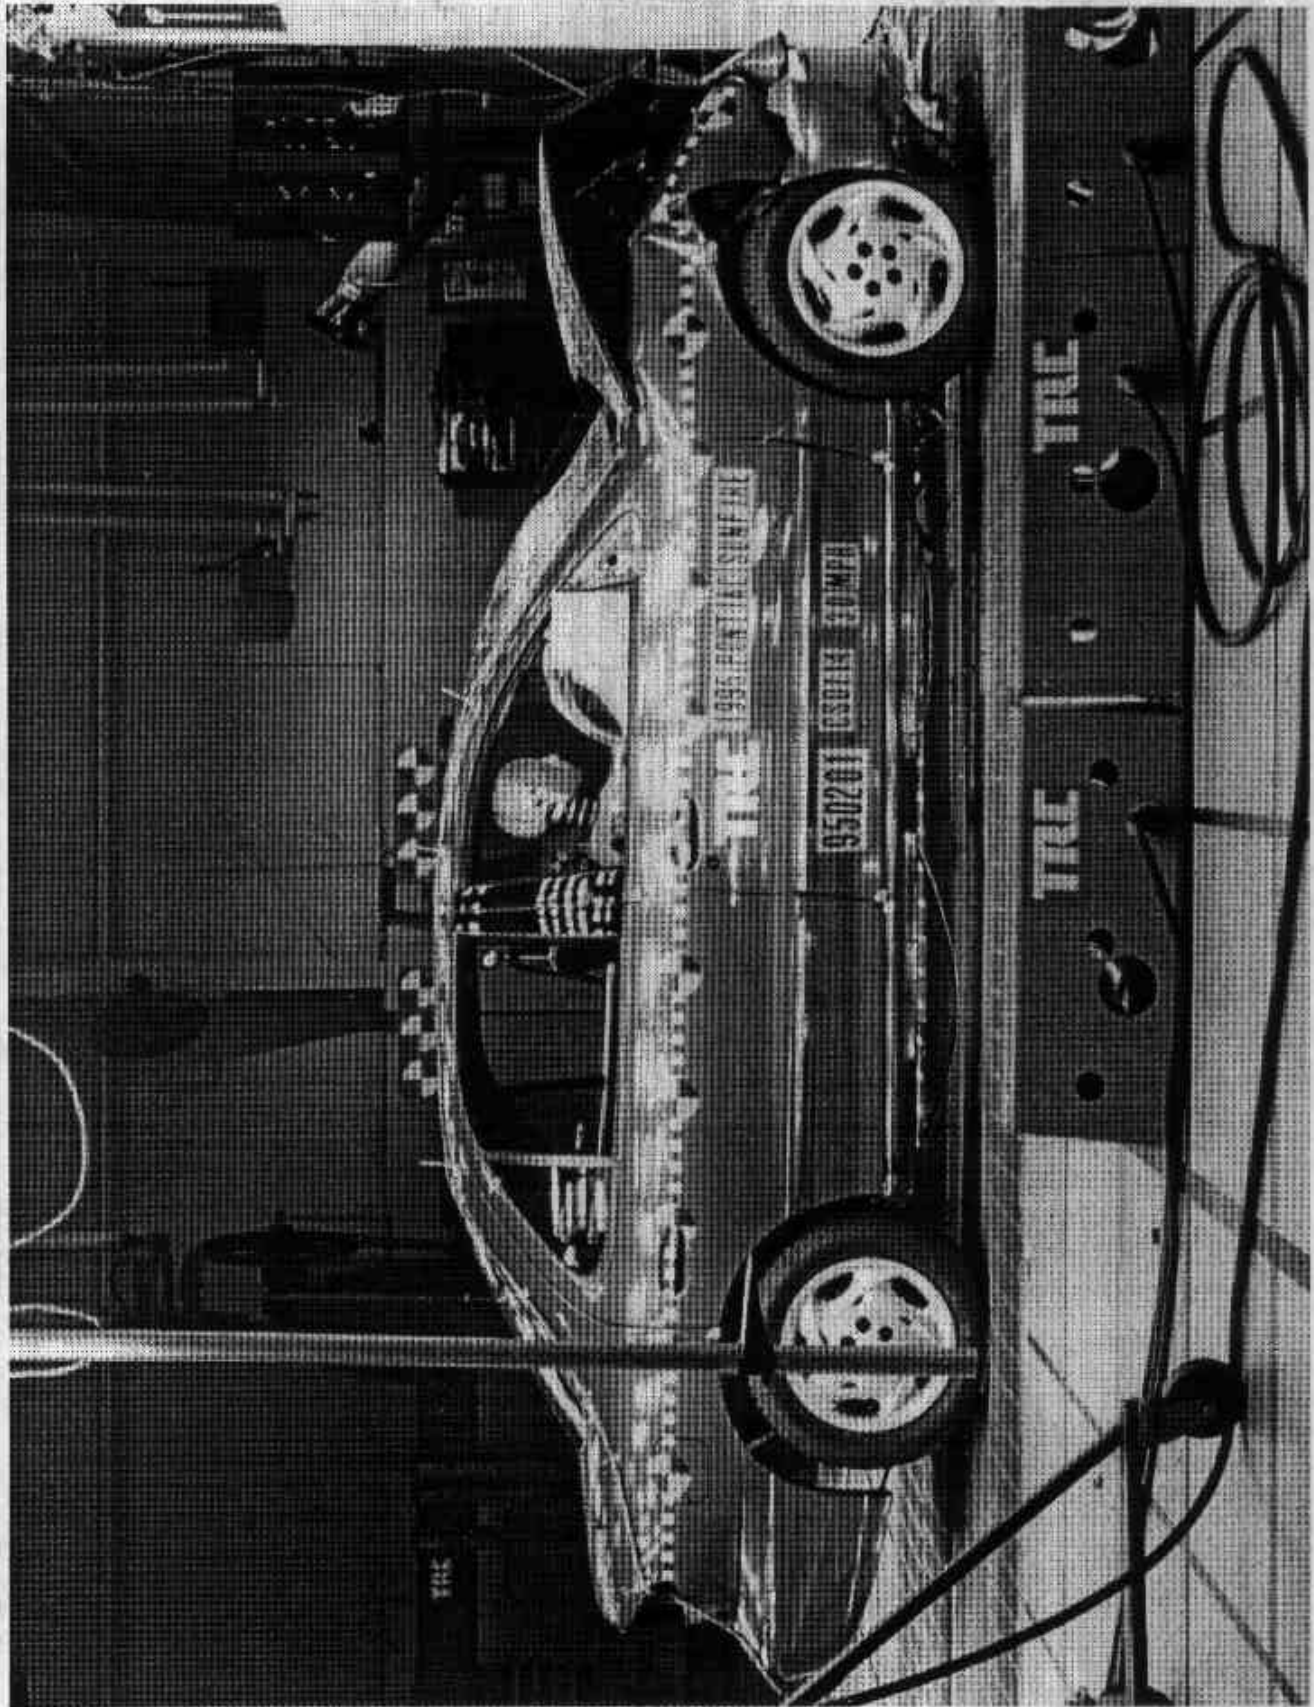


Figure A-6. Post-Test Right Side View
A-7

950201

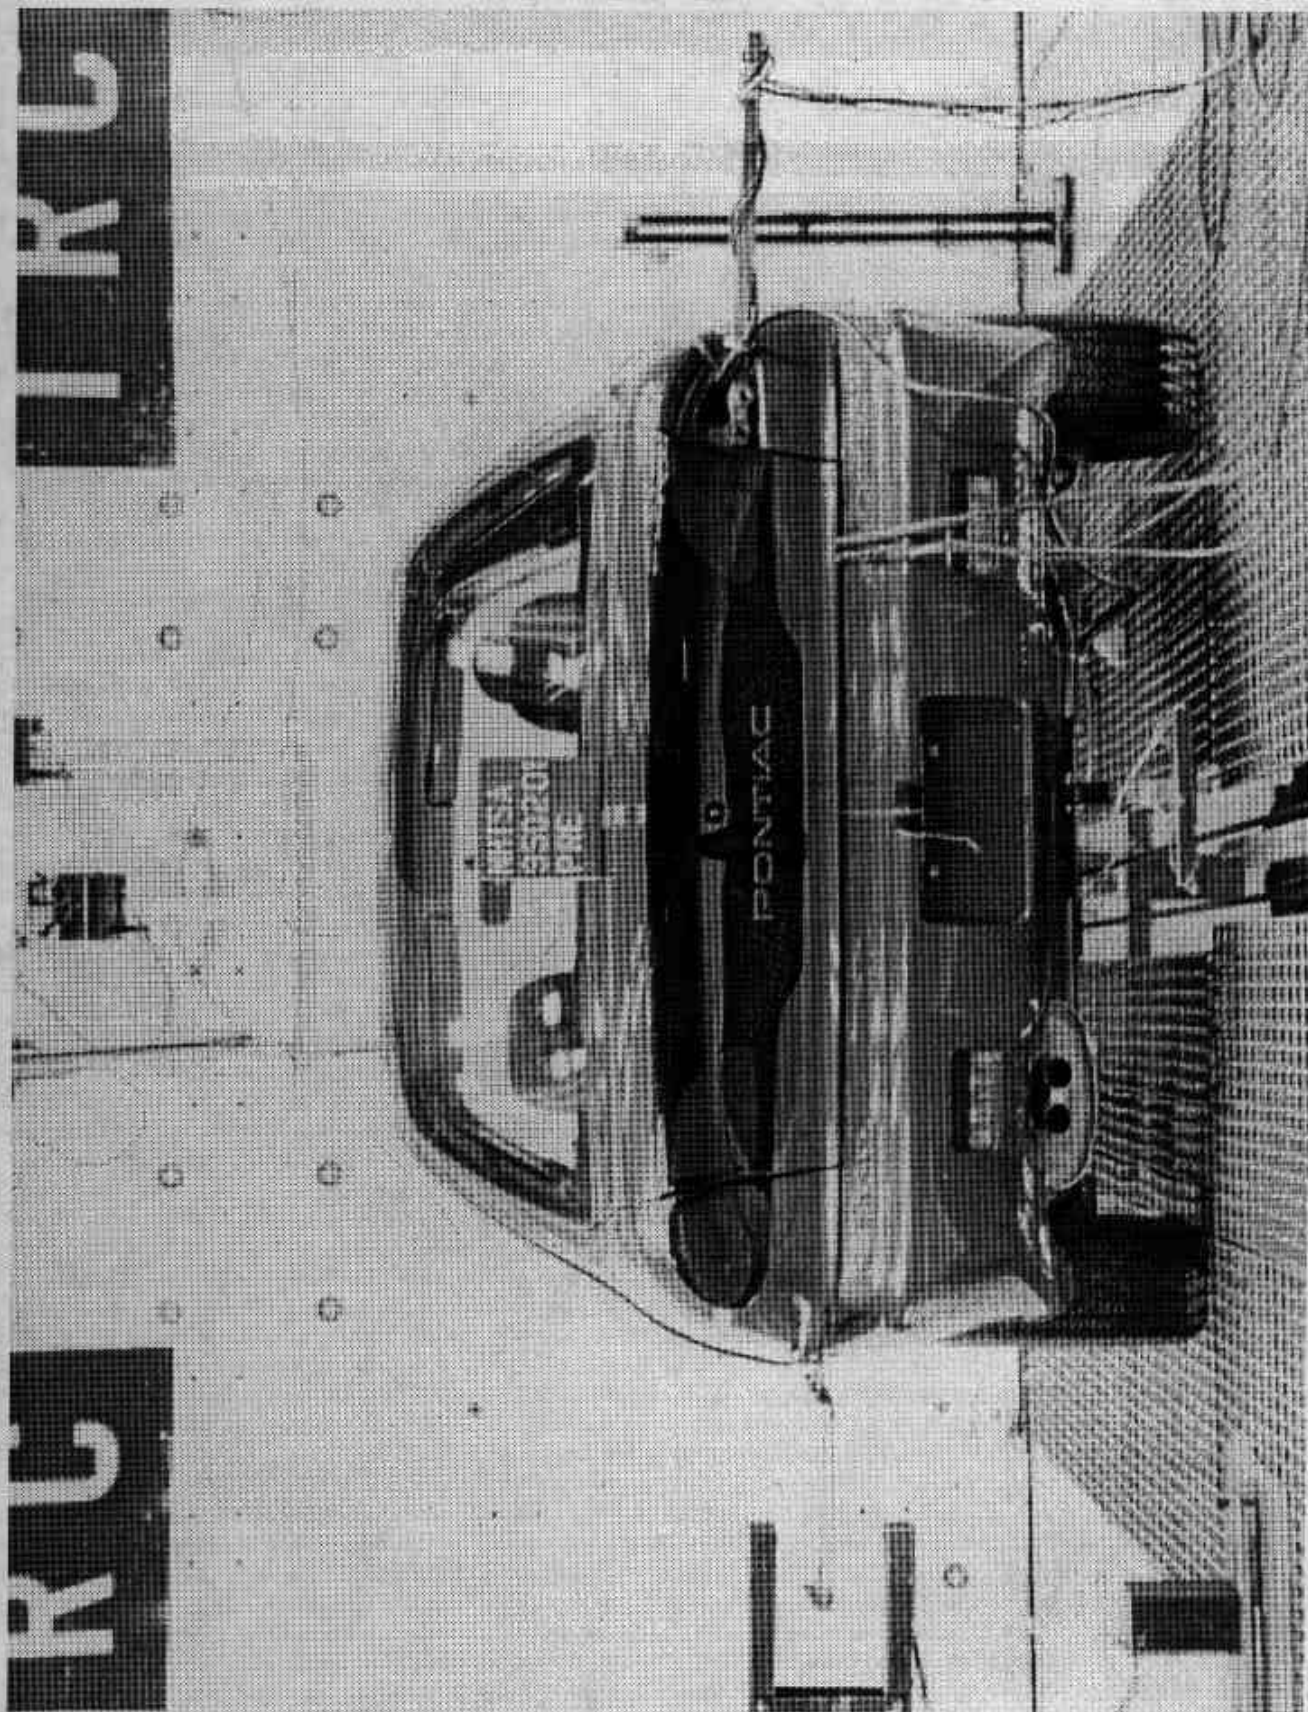


Figure A-7. Pre-Test Rear View

A-8

950201

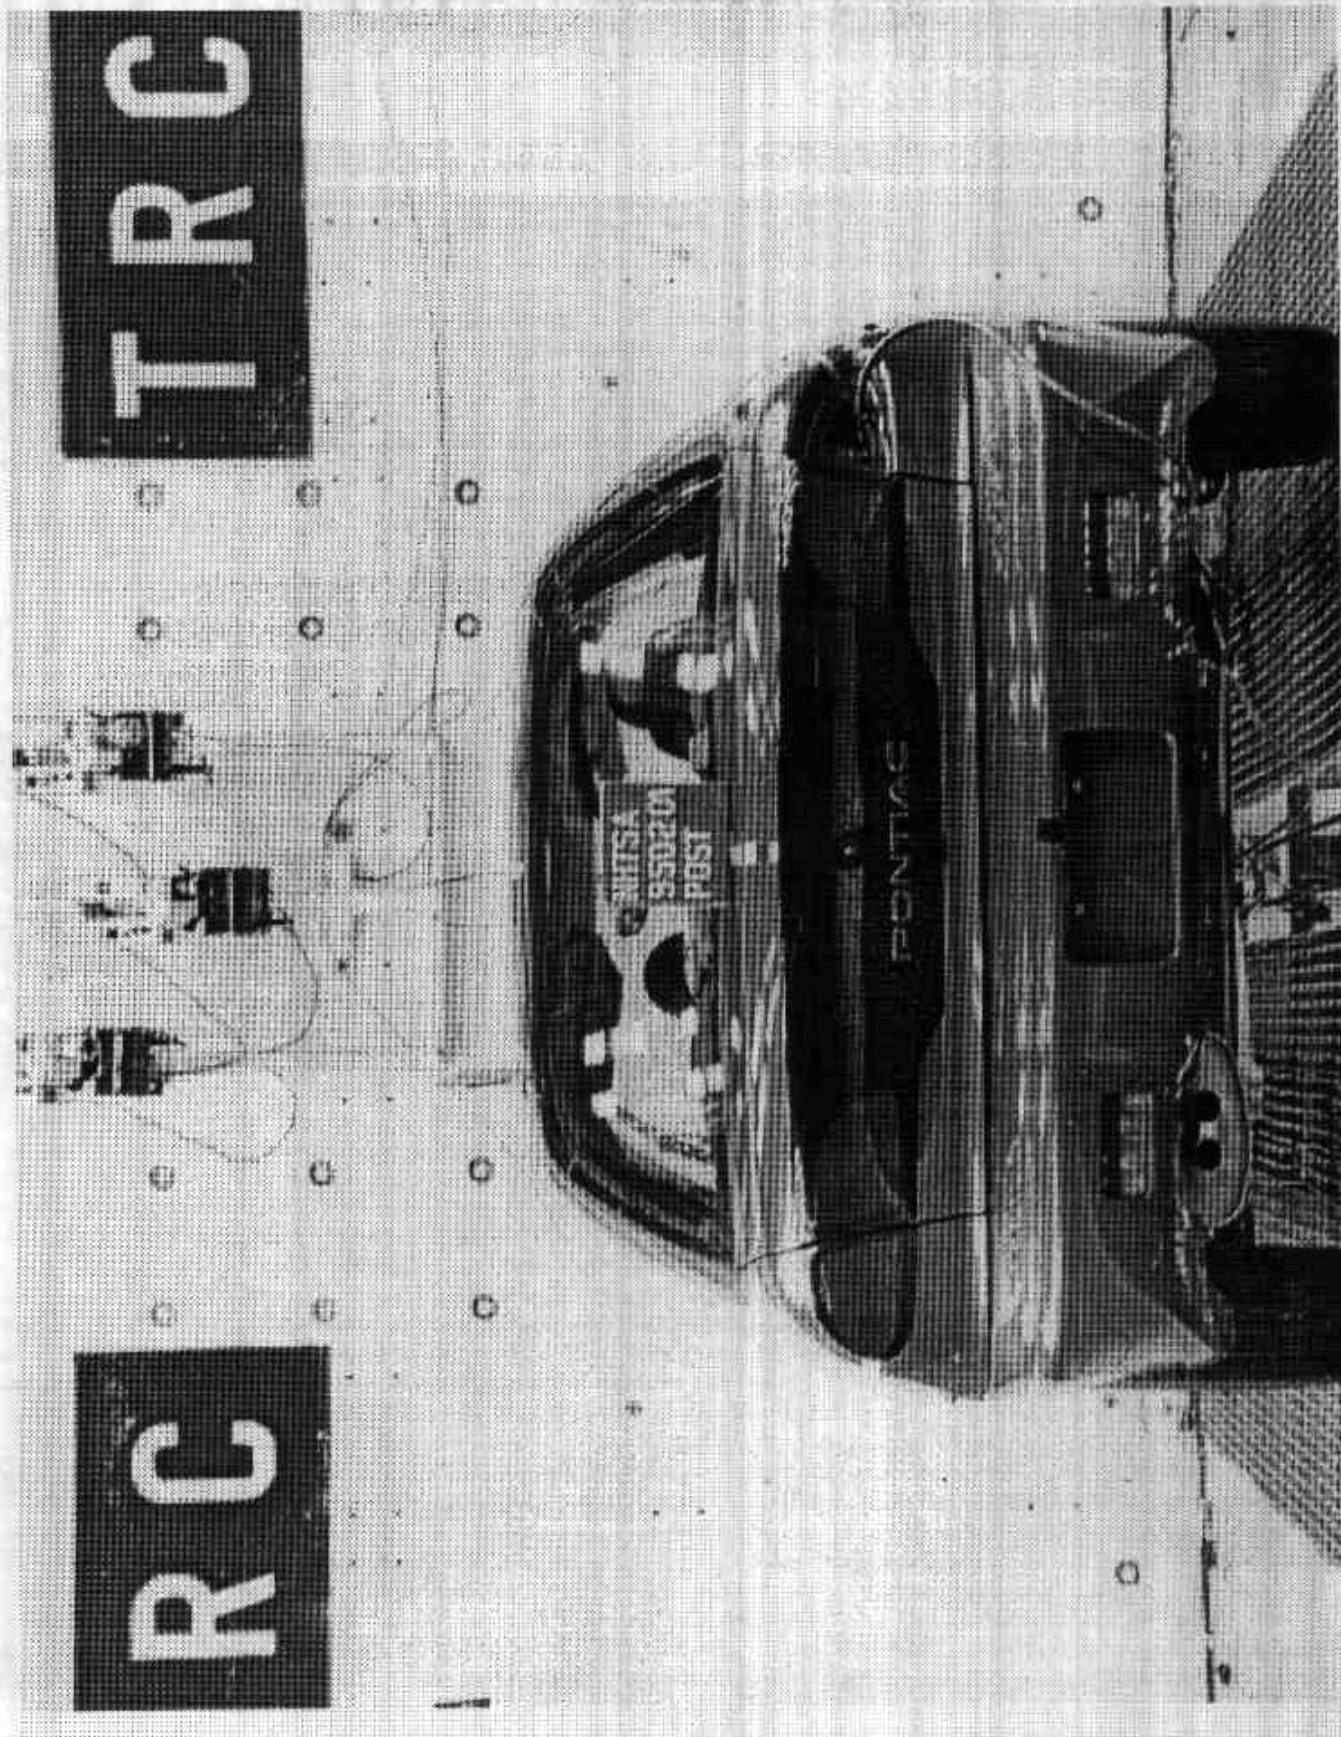


Figure A-8. Post-Test Rear View
A-9

950201

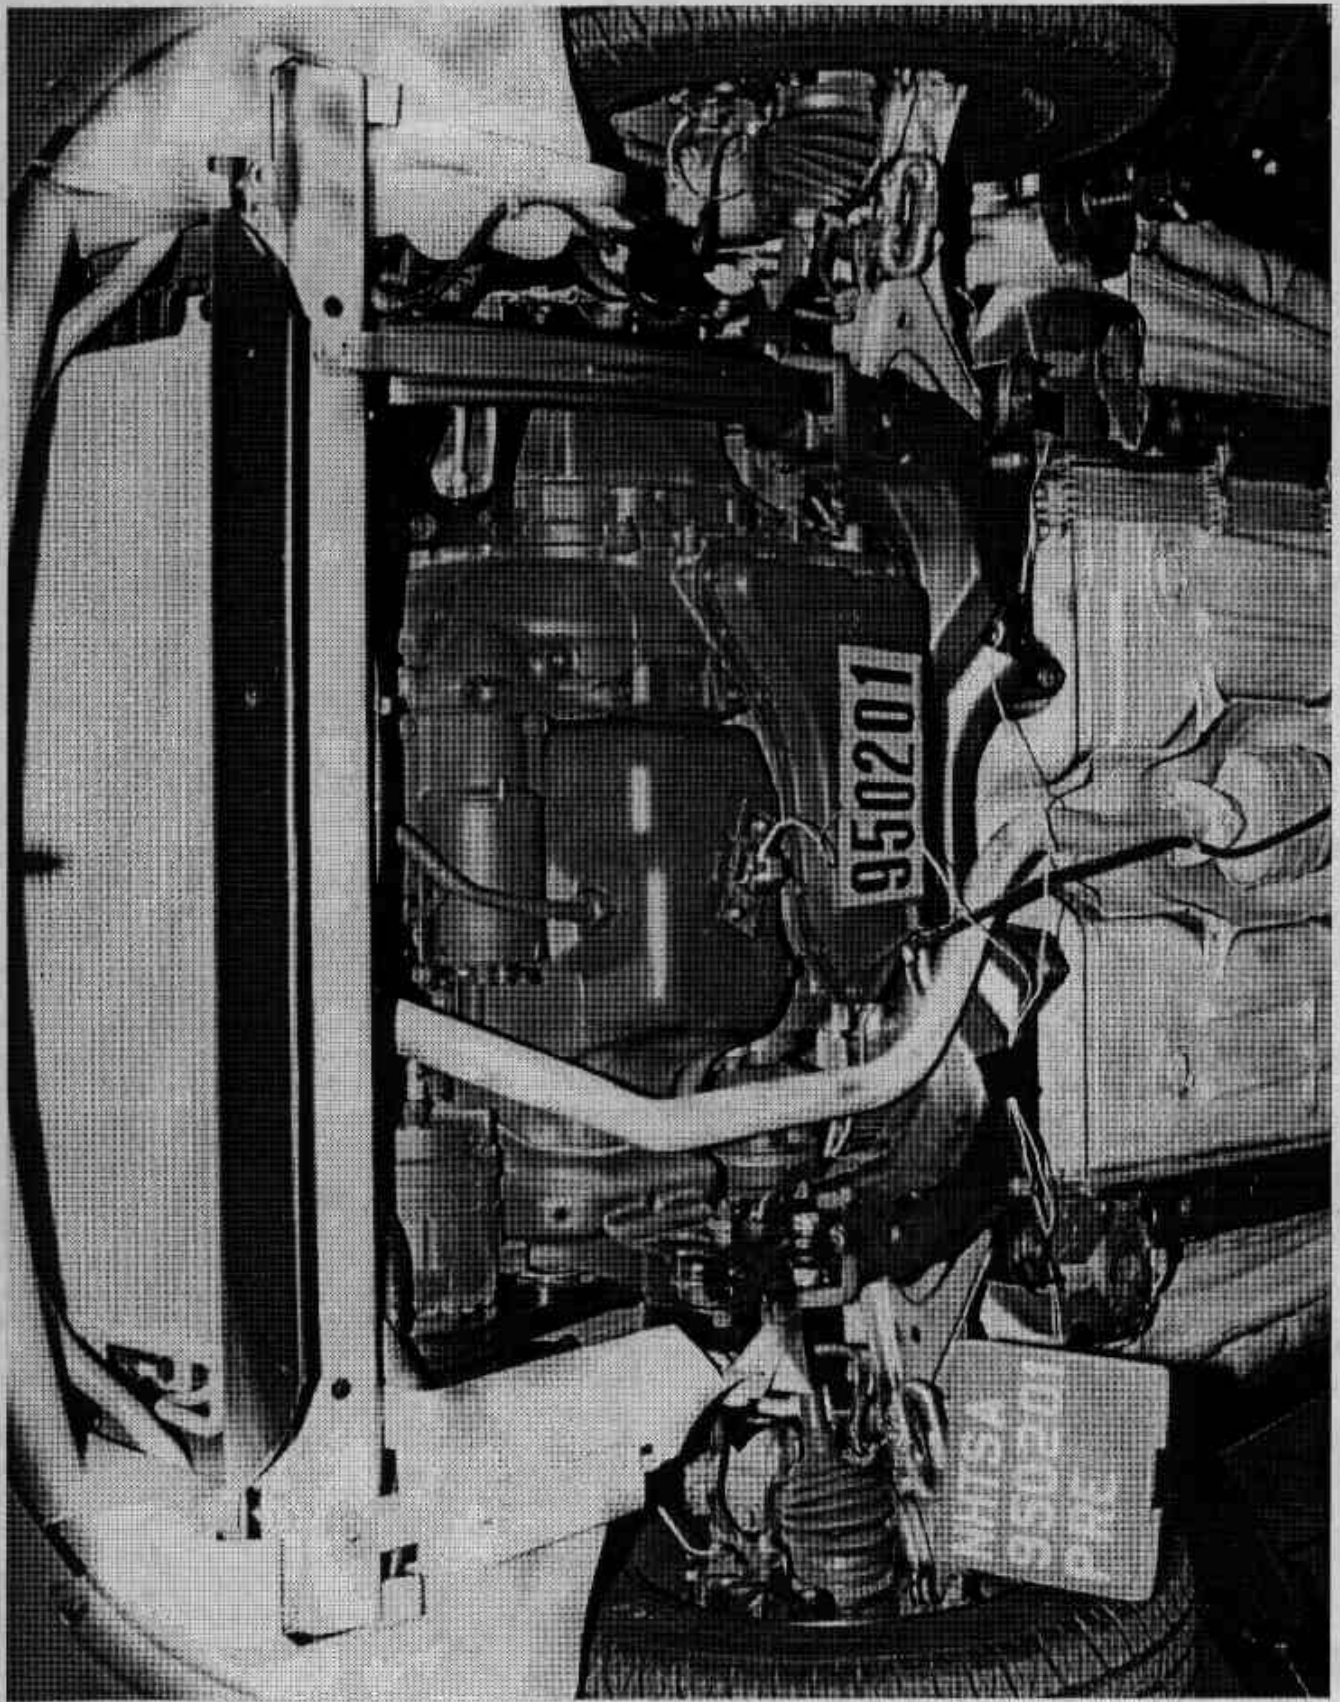


Figure A-9. Pre-Test Front Underbody View
A-10

950201

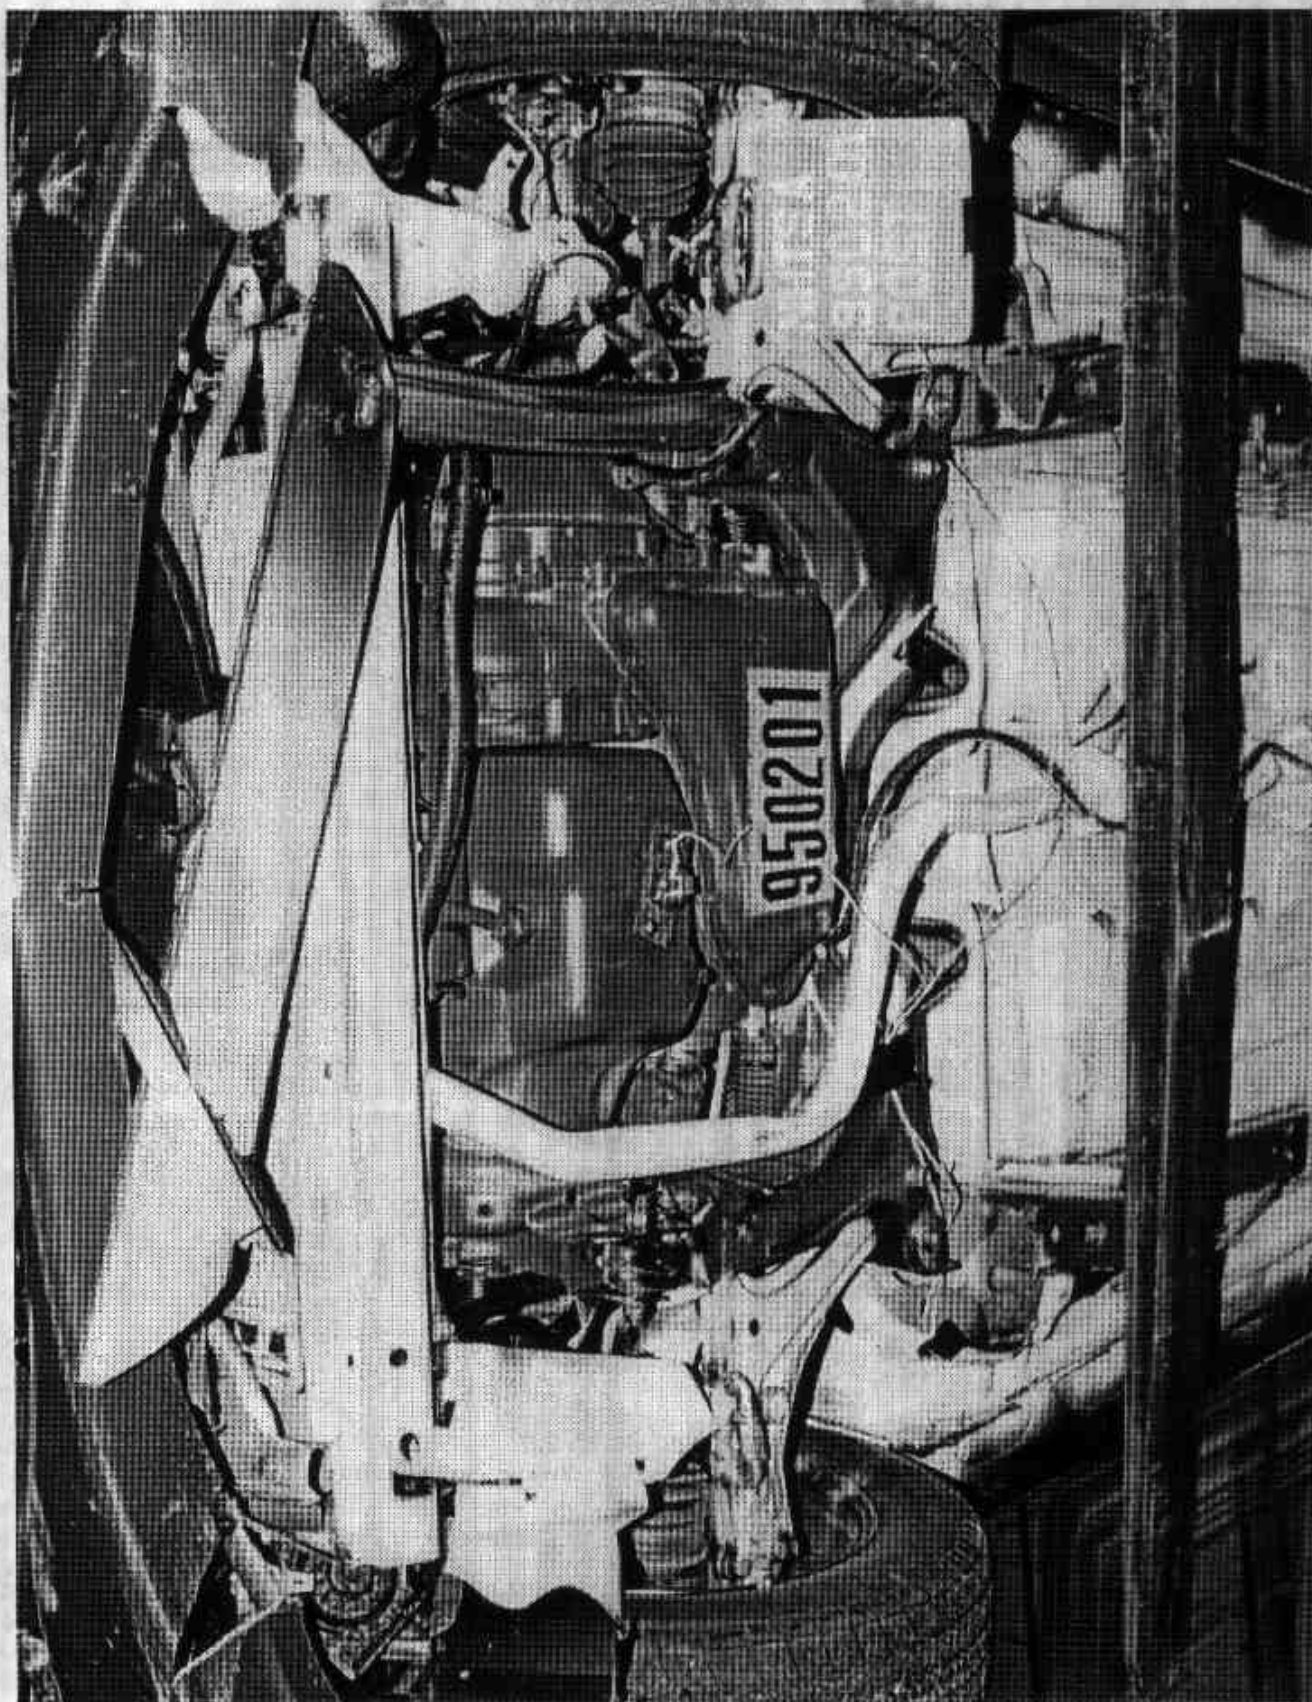


Figure A-10. Post-Test Front Underbody View
A-11

950201

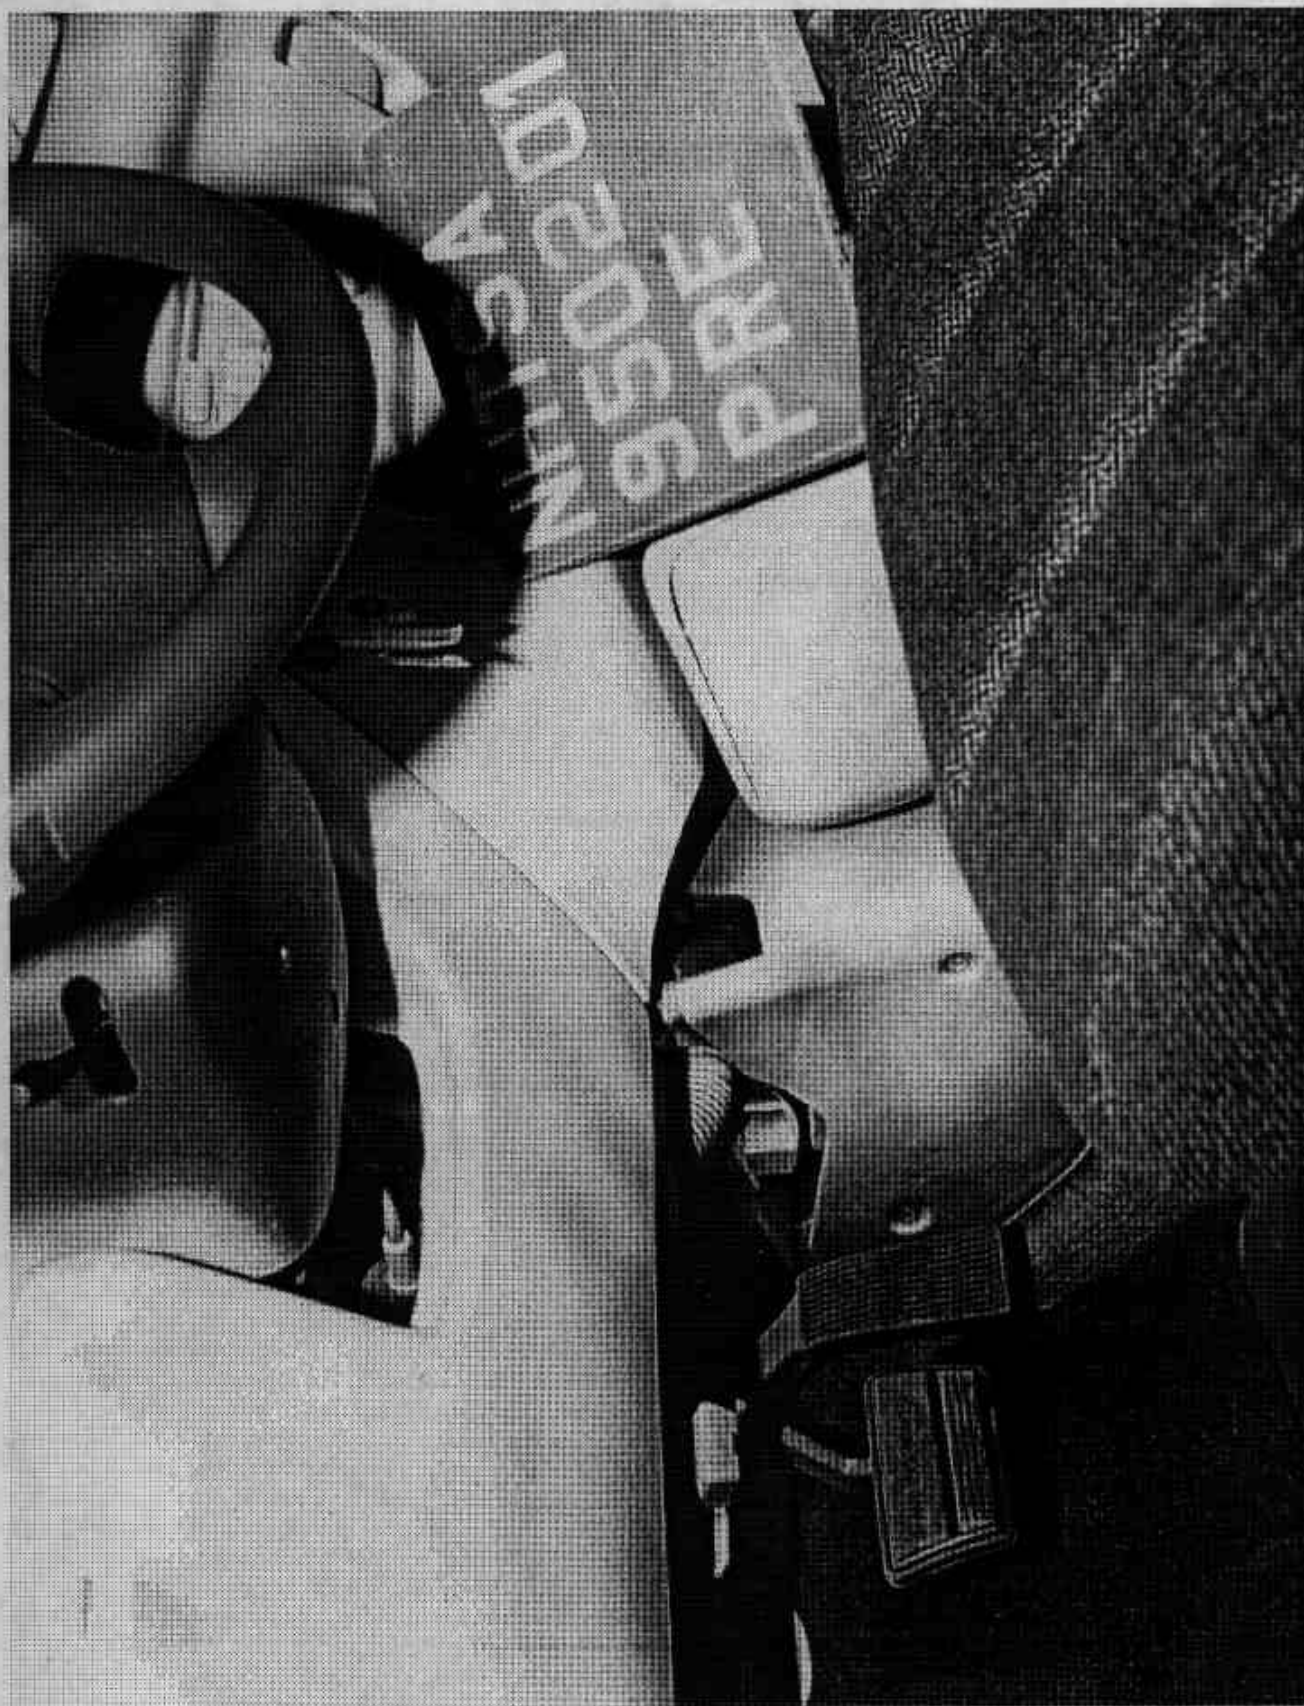


Figure A-11. Pre-Test Driver's Knee Bolster View
A-12

950201

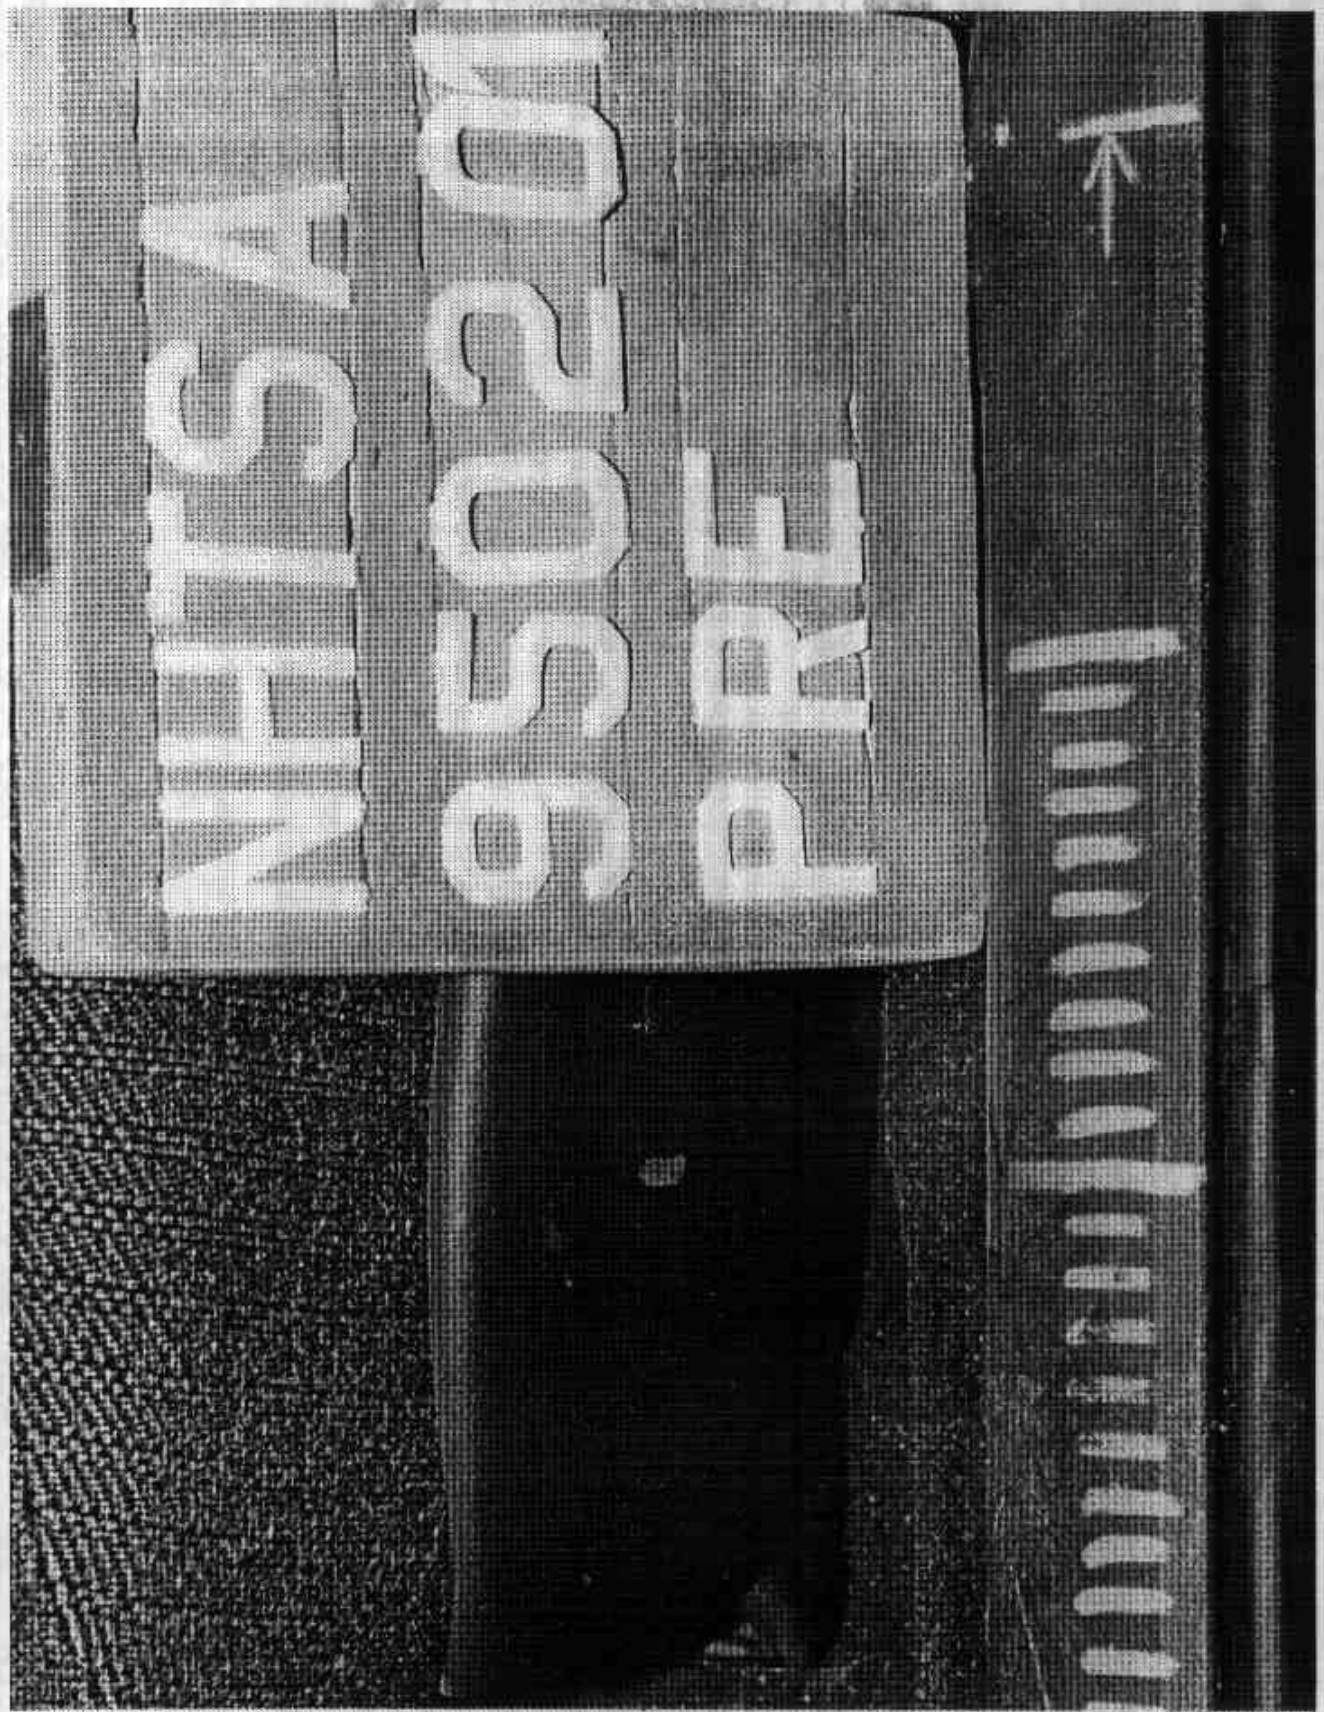


Figure A-12. Pre-Test Driver's Seat Location View
A-13

950201

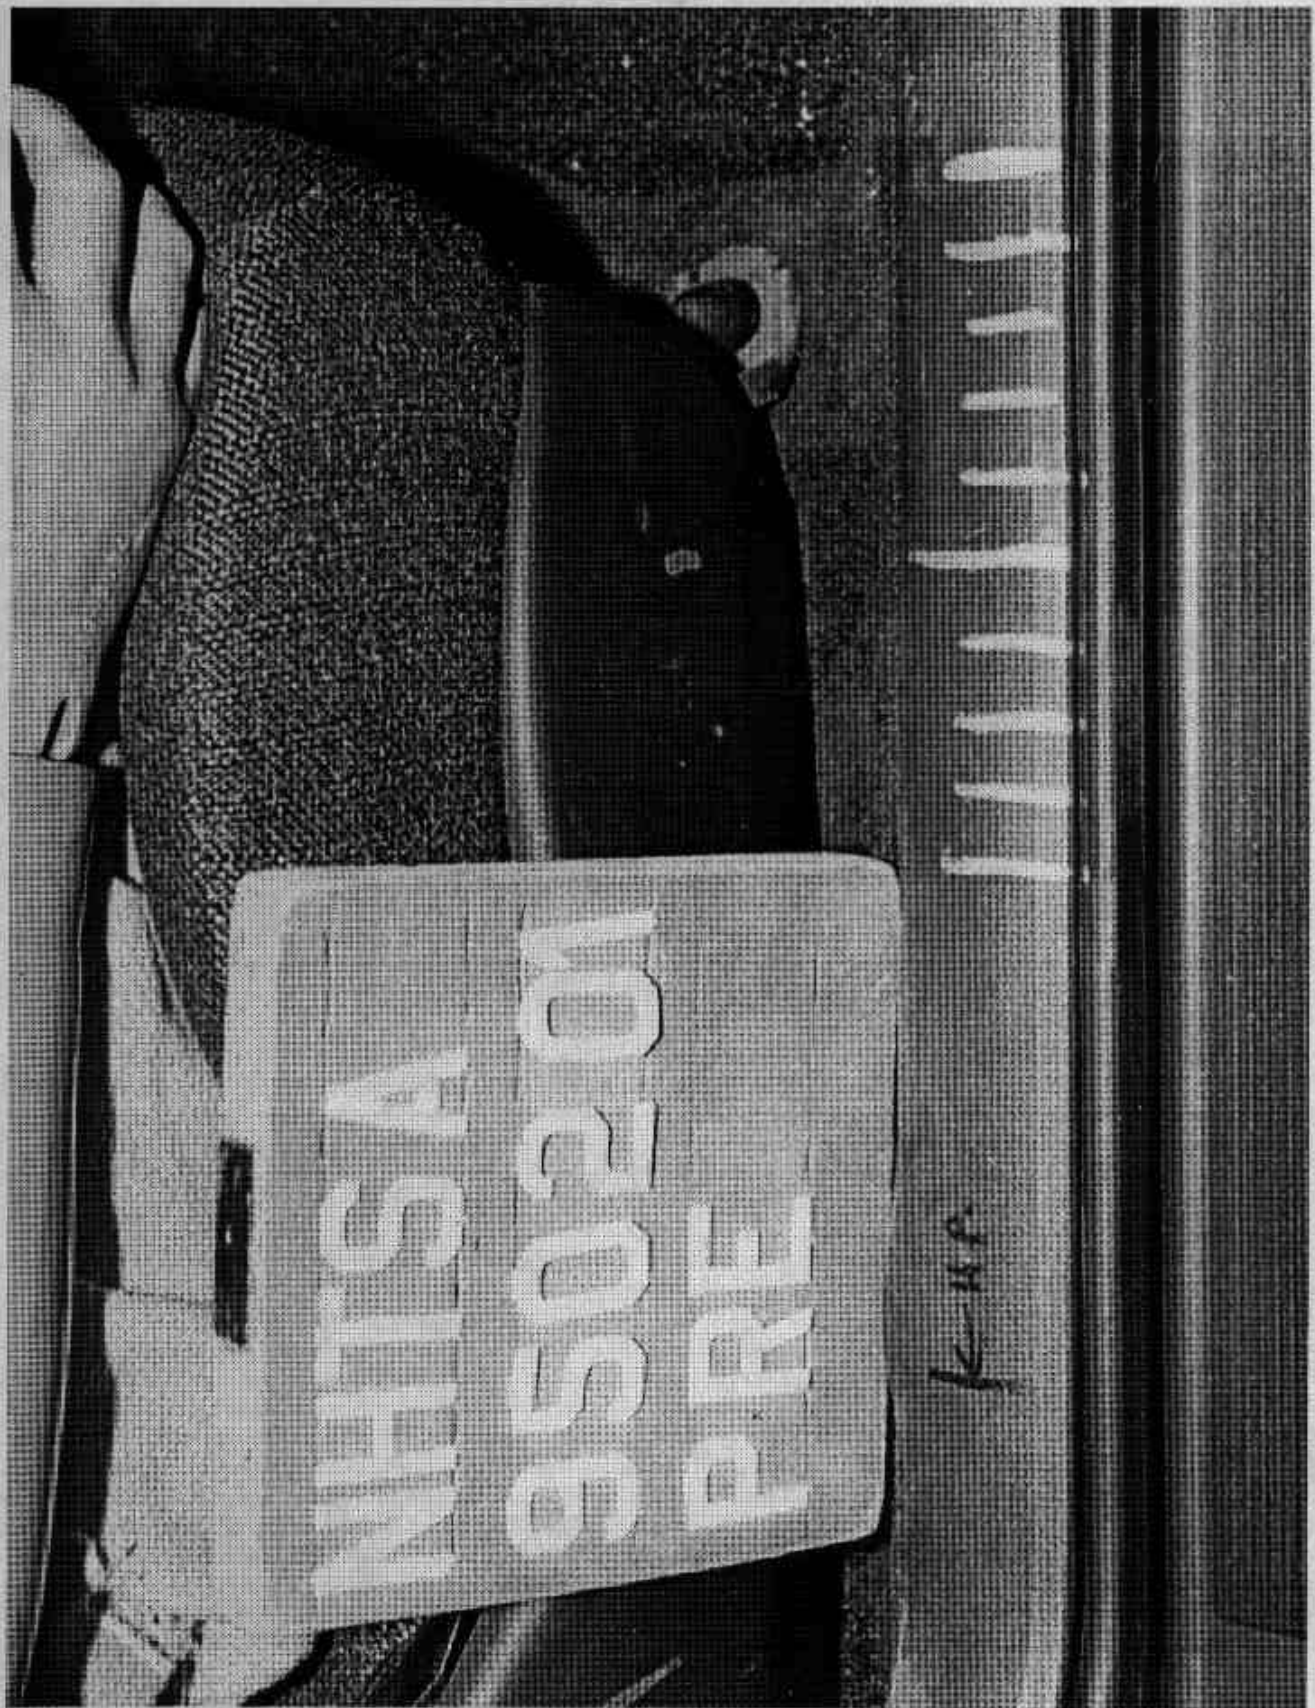


Figure A-13. Pre-Test Passenger's Seat Location View
A-14

950201



Figure A-14. Pre-Test Steering Column at Firewall View - Interior
A-15

950201



Figure A-15. Post-Test Steering Column at Firewall View - Interior

A-16

950201

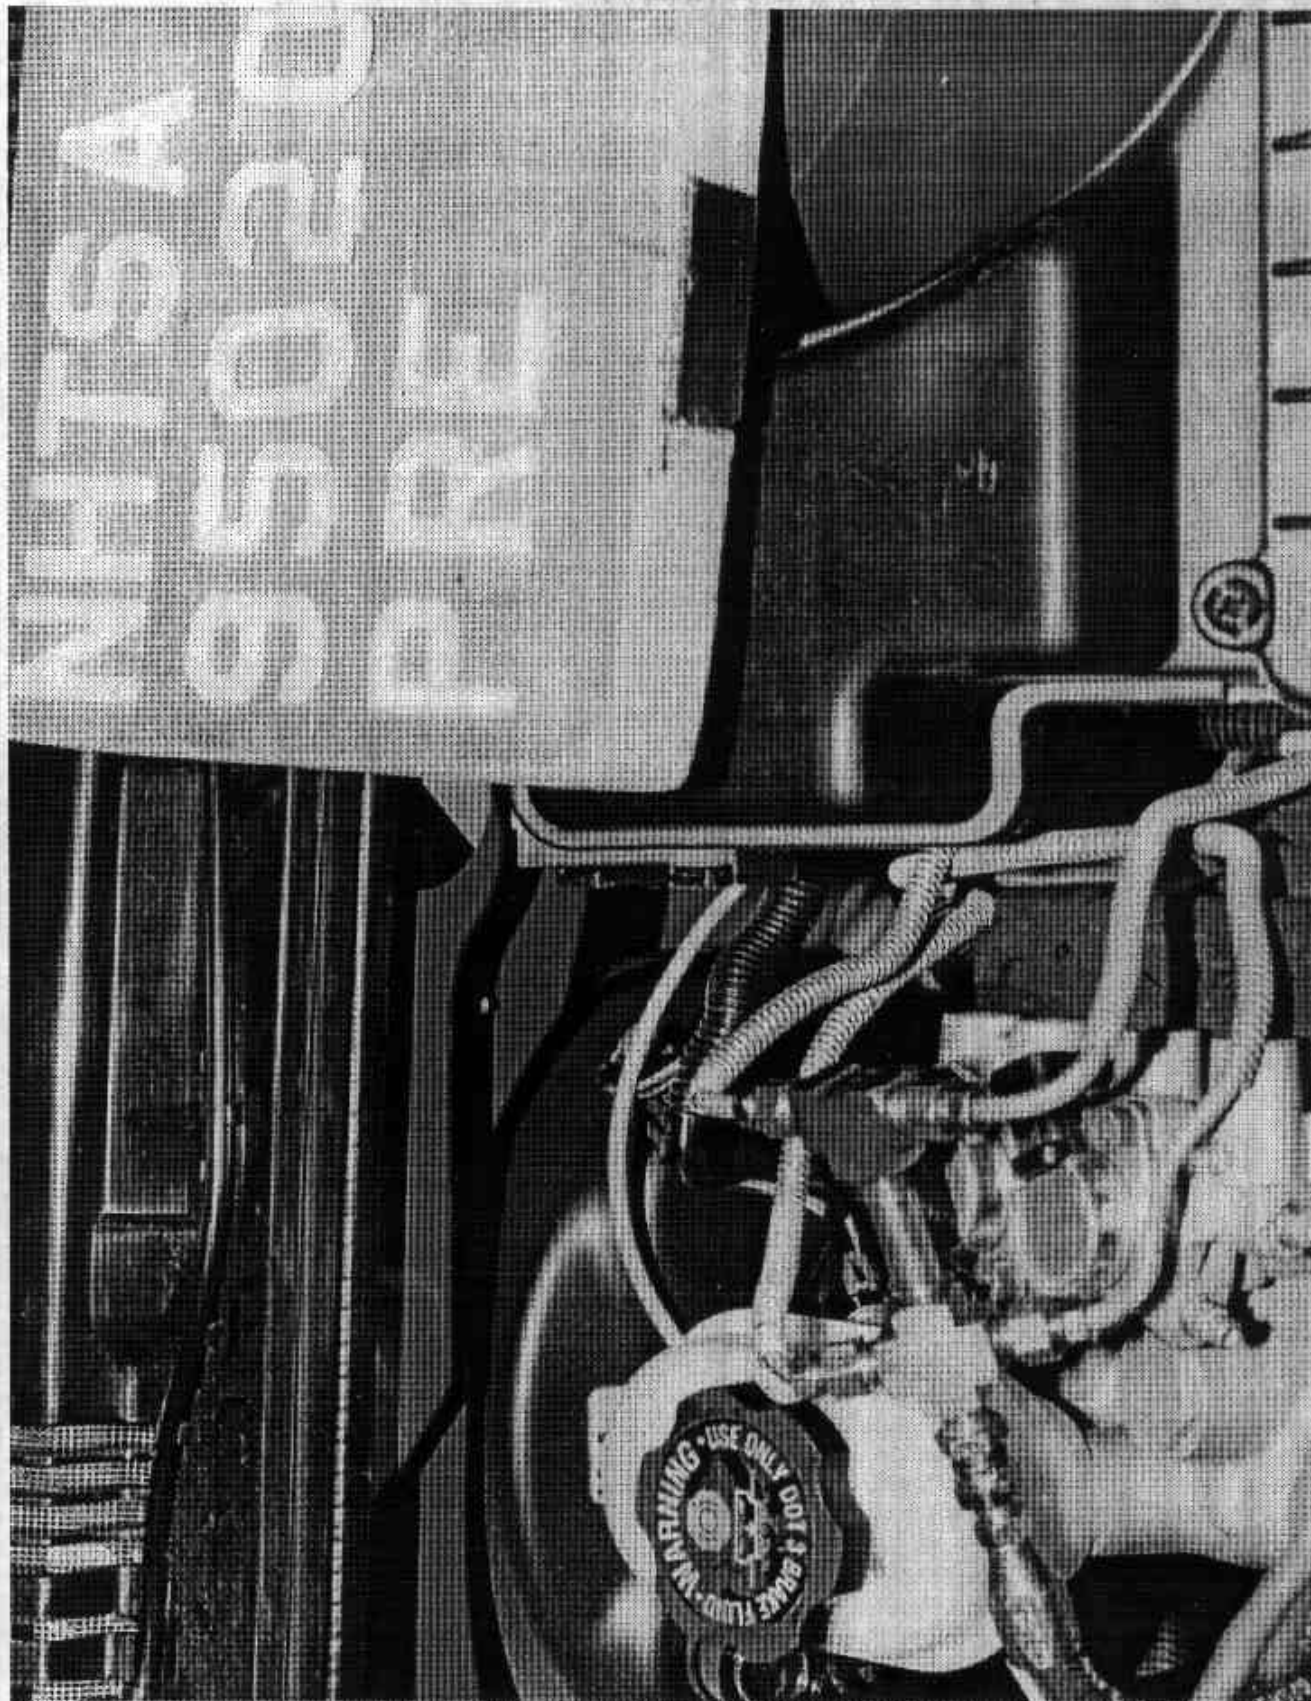


Figure A-16. Pre-Test Steering Column at Firewall View - Exterior
A-17

950201



Figure A-17. Pre-Test Driver Dummy & Vehicle Interior View
A-18

950201

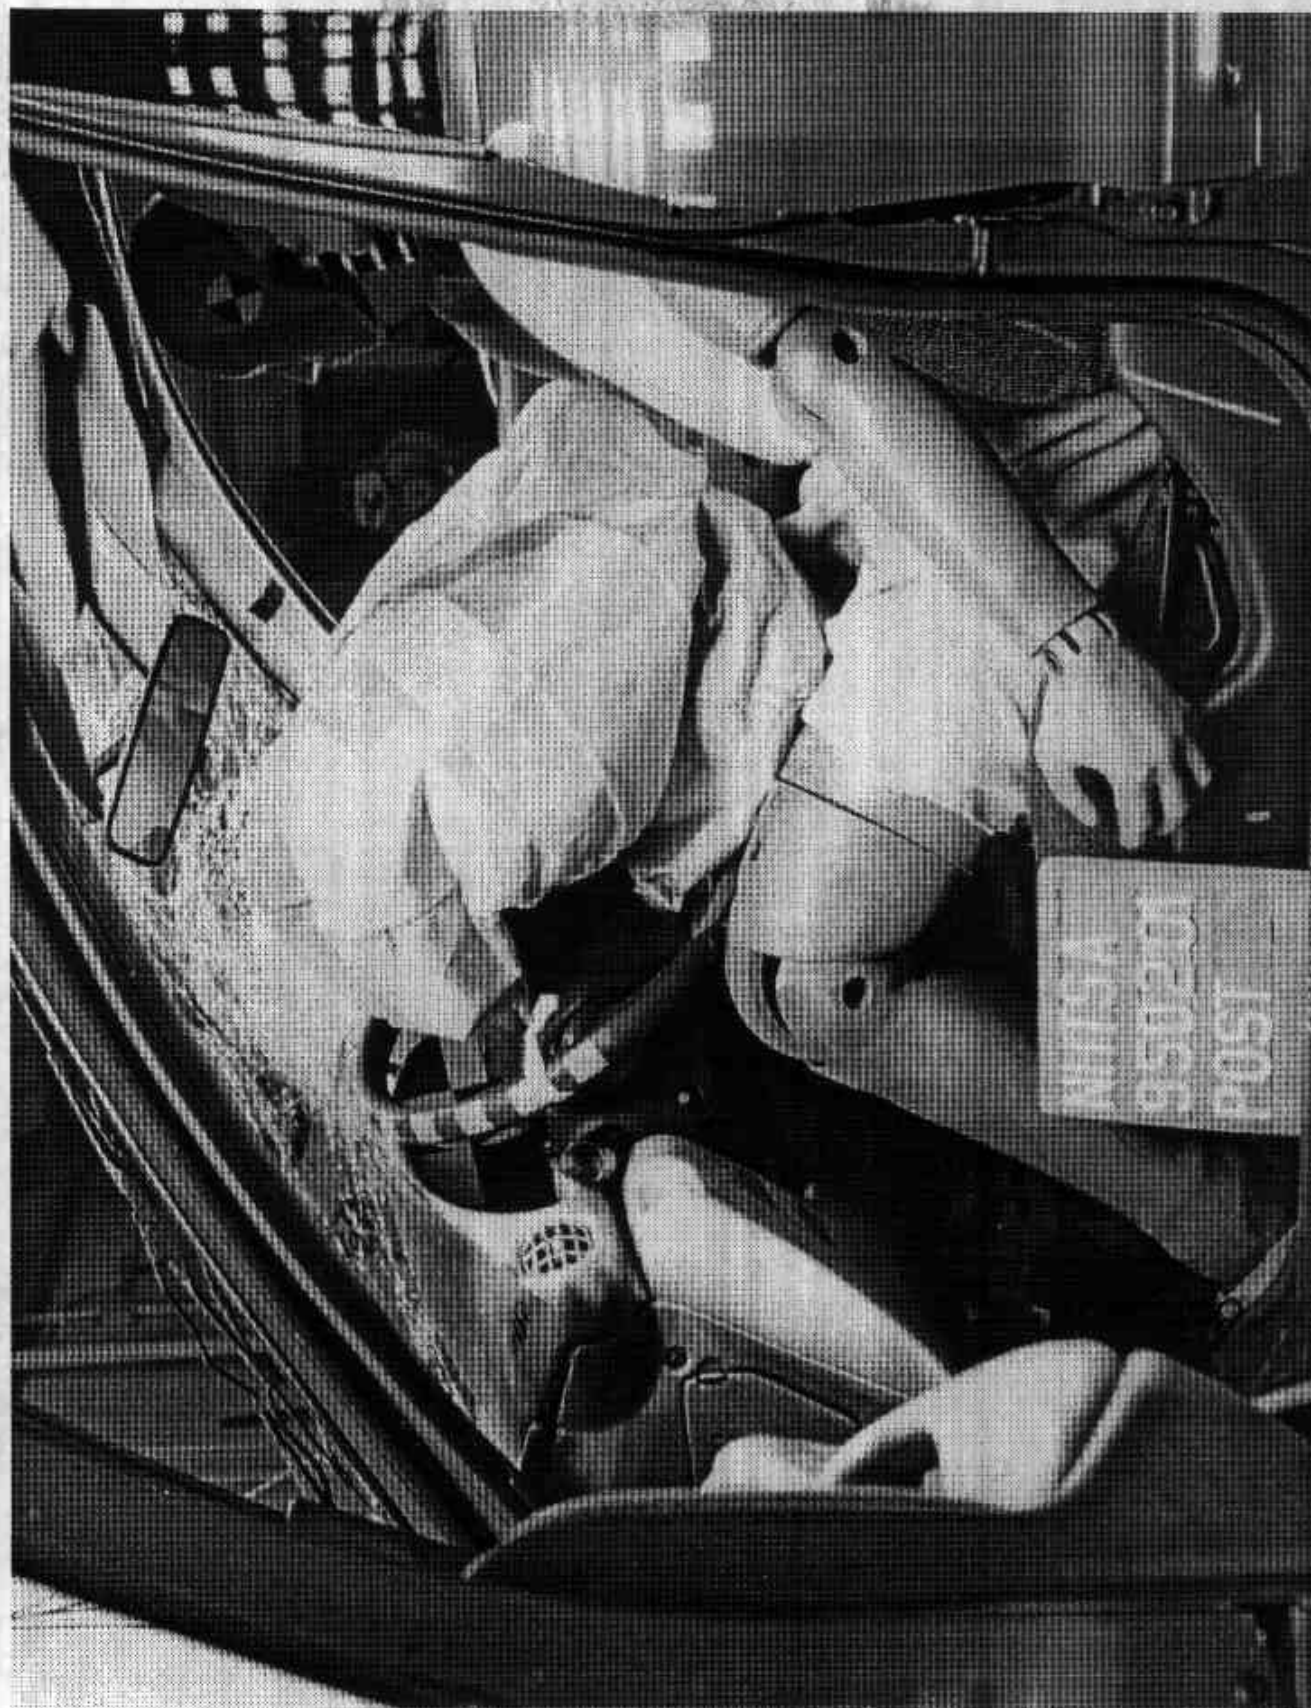


Figure A-18. Post-Test Driver Dummy & Vehicle Interior View
A-19

950201

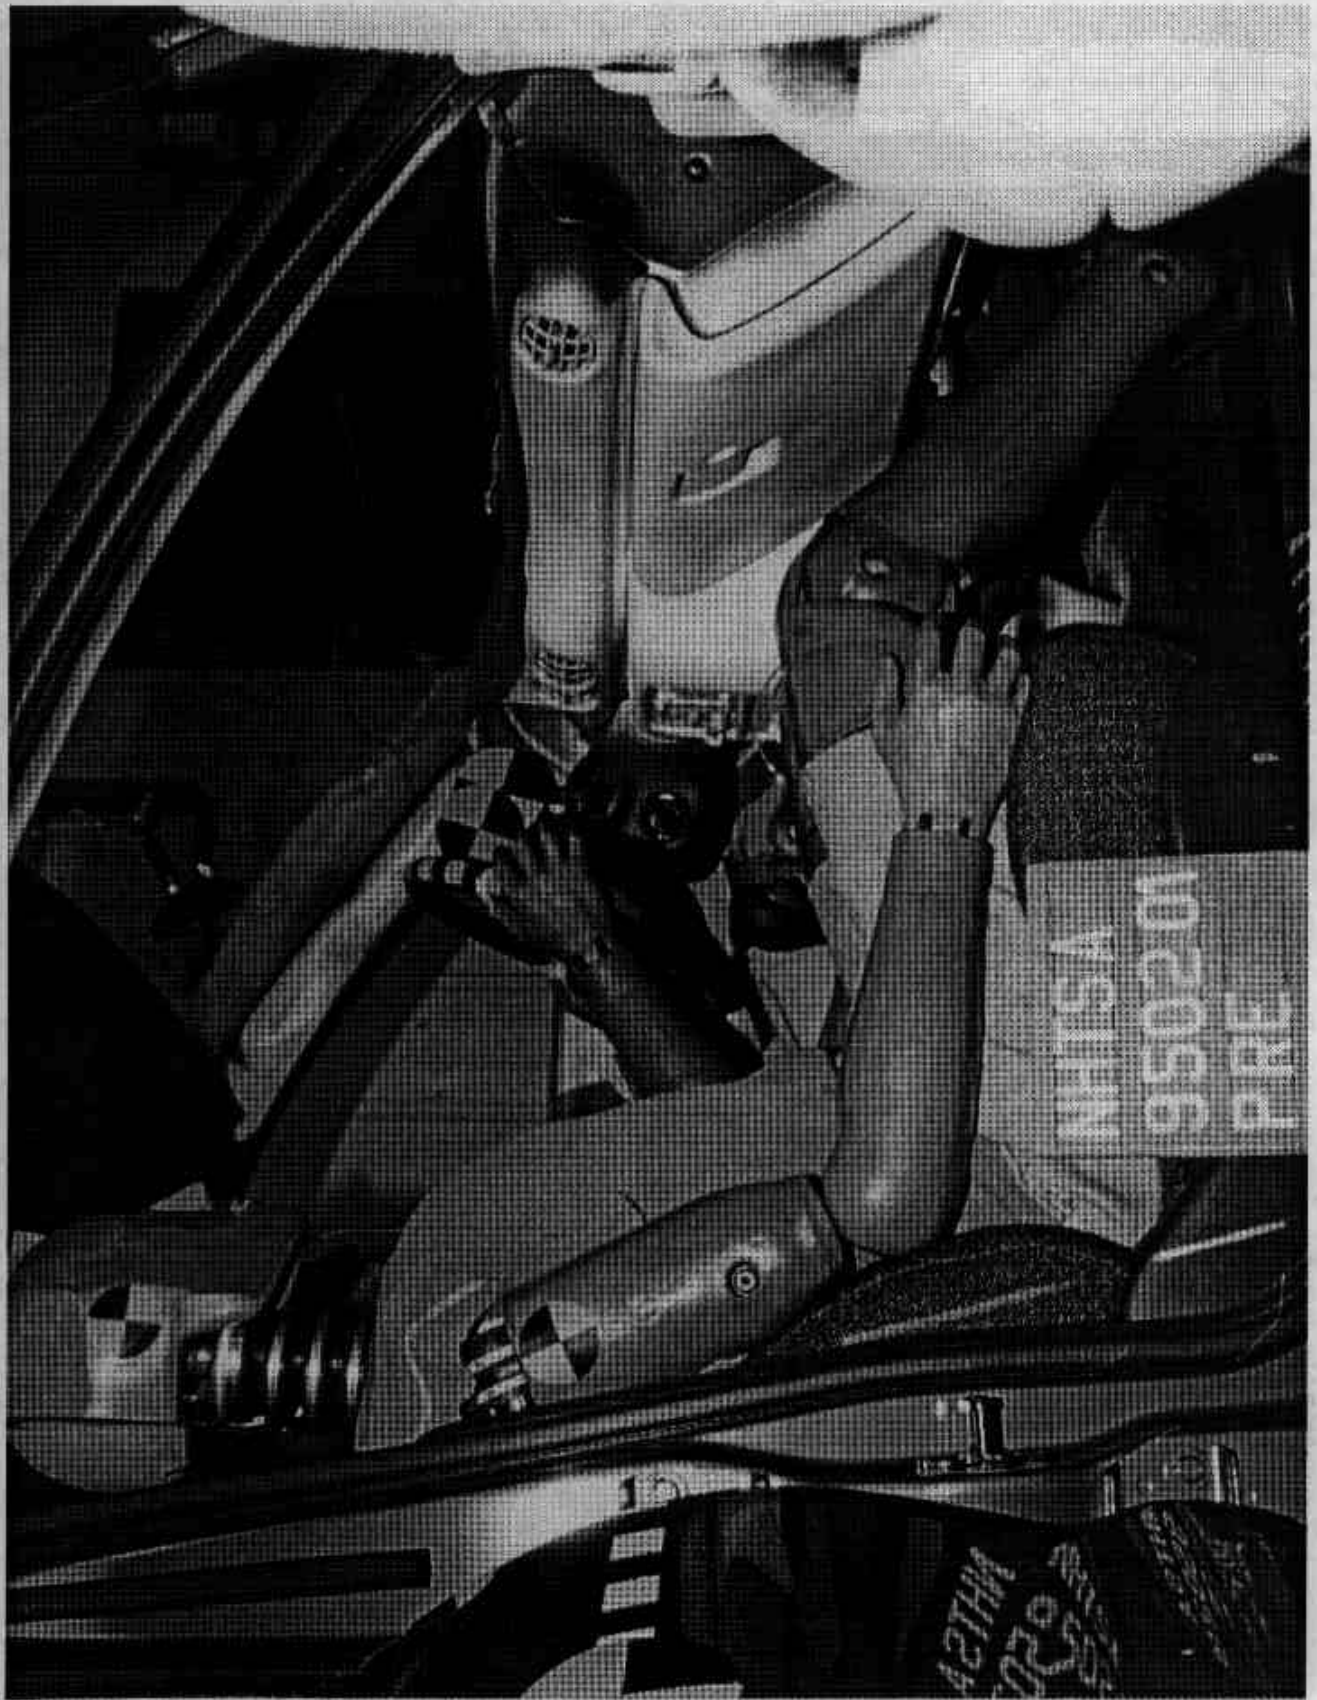


Figure A-19. Pre-Test Passenger Dummy & Vehicle Interior View

A-20

950201



Figure A-20. Post-Test Passenger Dummy & Vehicle Interior View

A-21

950201

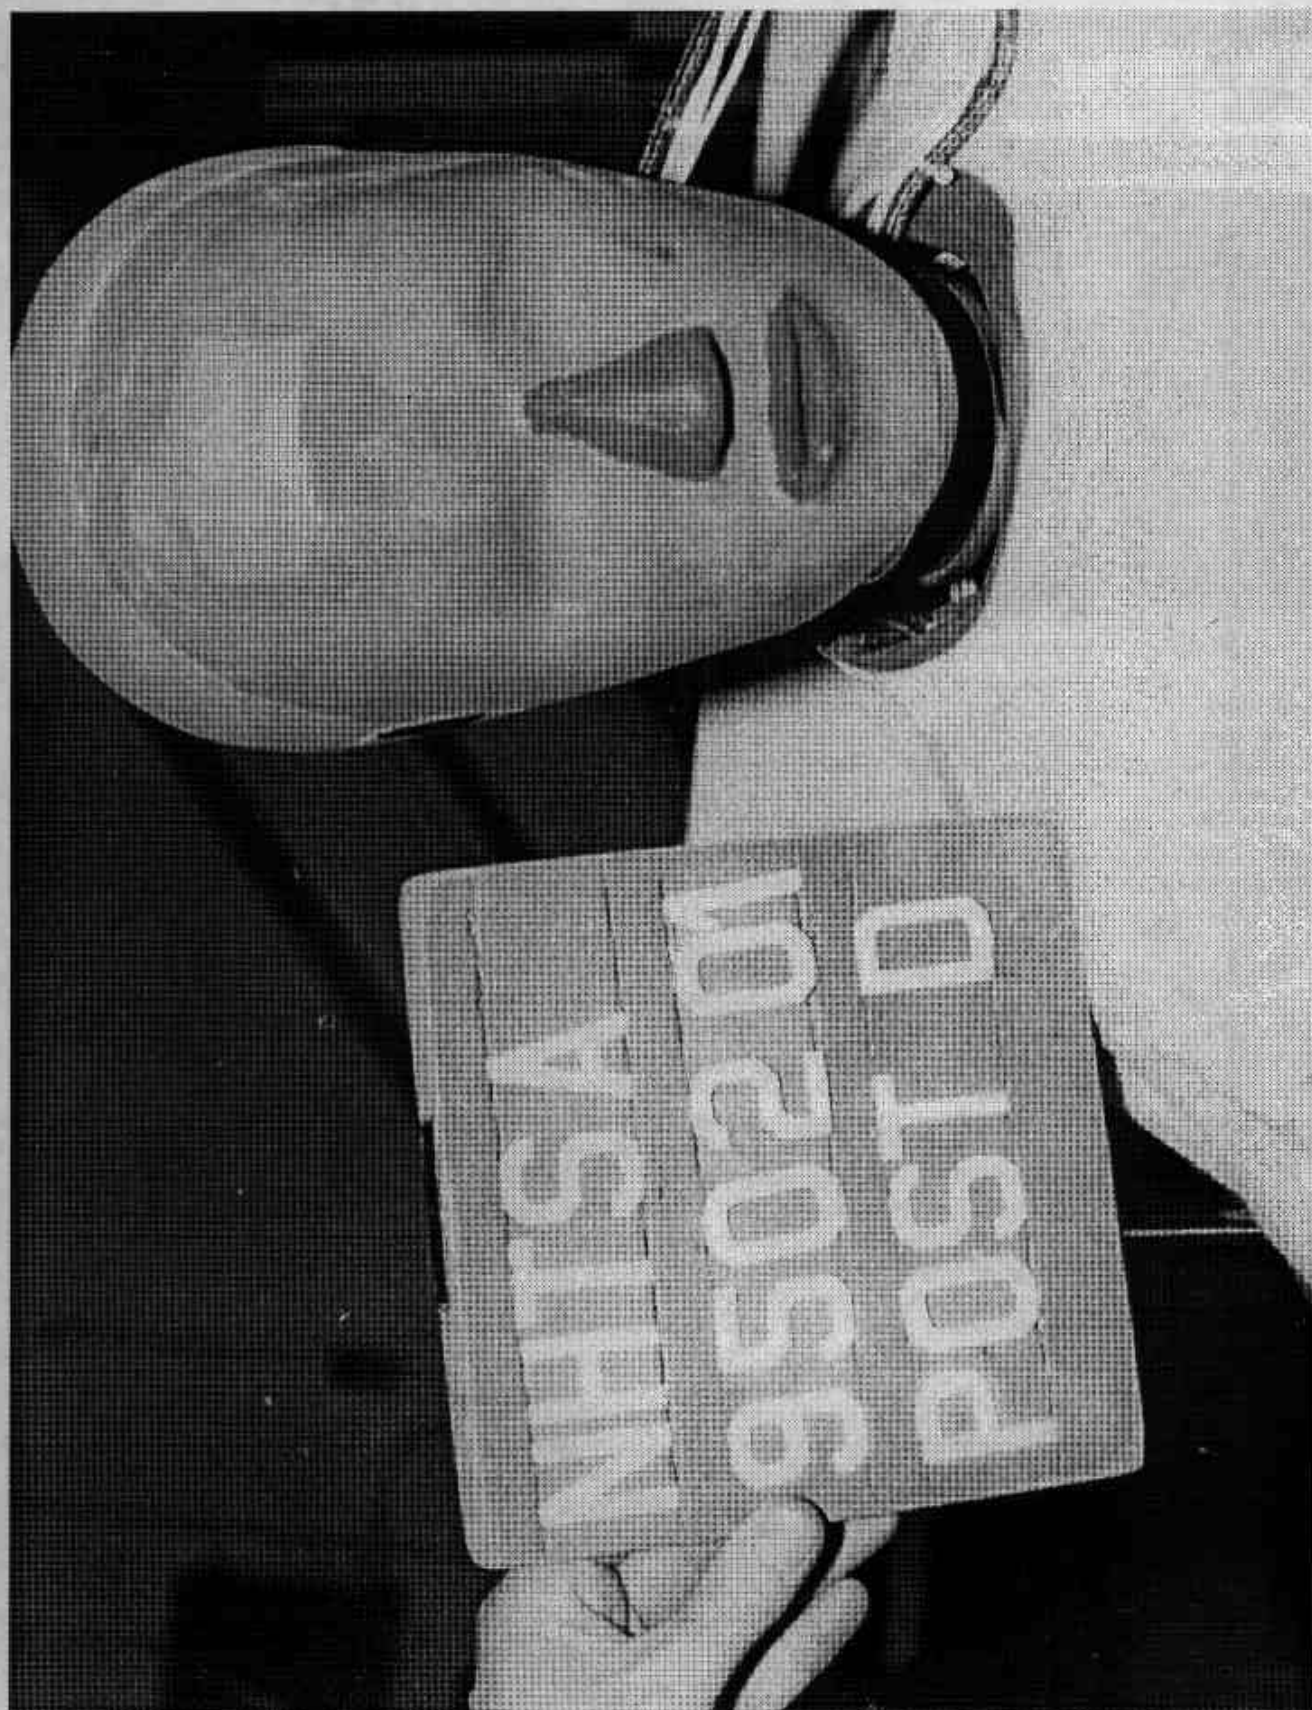


Figure A-21. Post-Test Driver Dummy Head Contact - View 1
A-22

950201



Figure A-22. Post-Test Driver Dummy Head Contact - View 2
A-23

950201

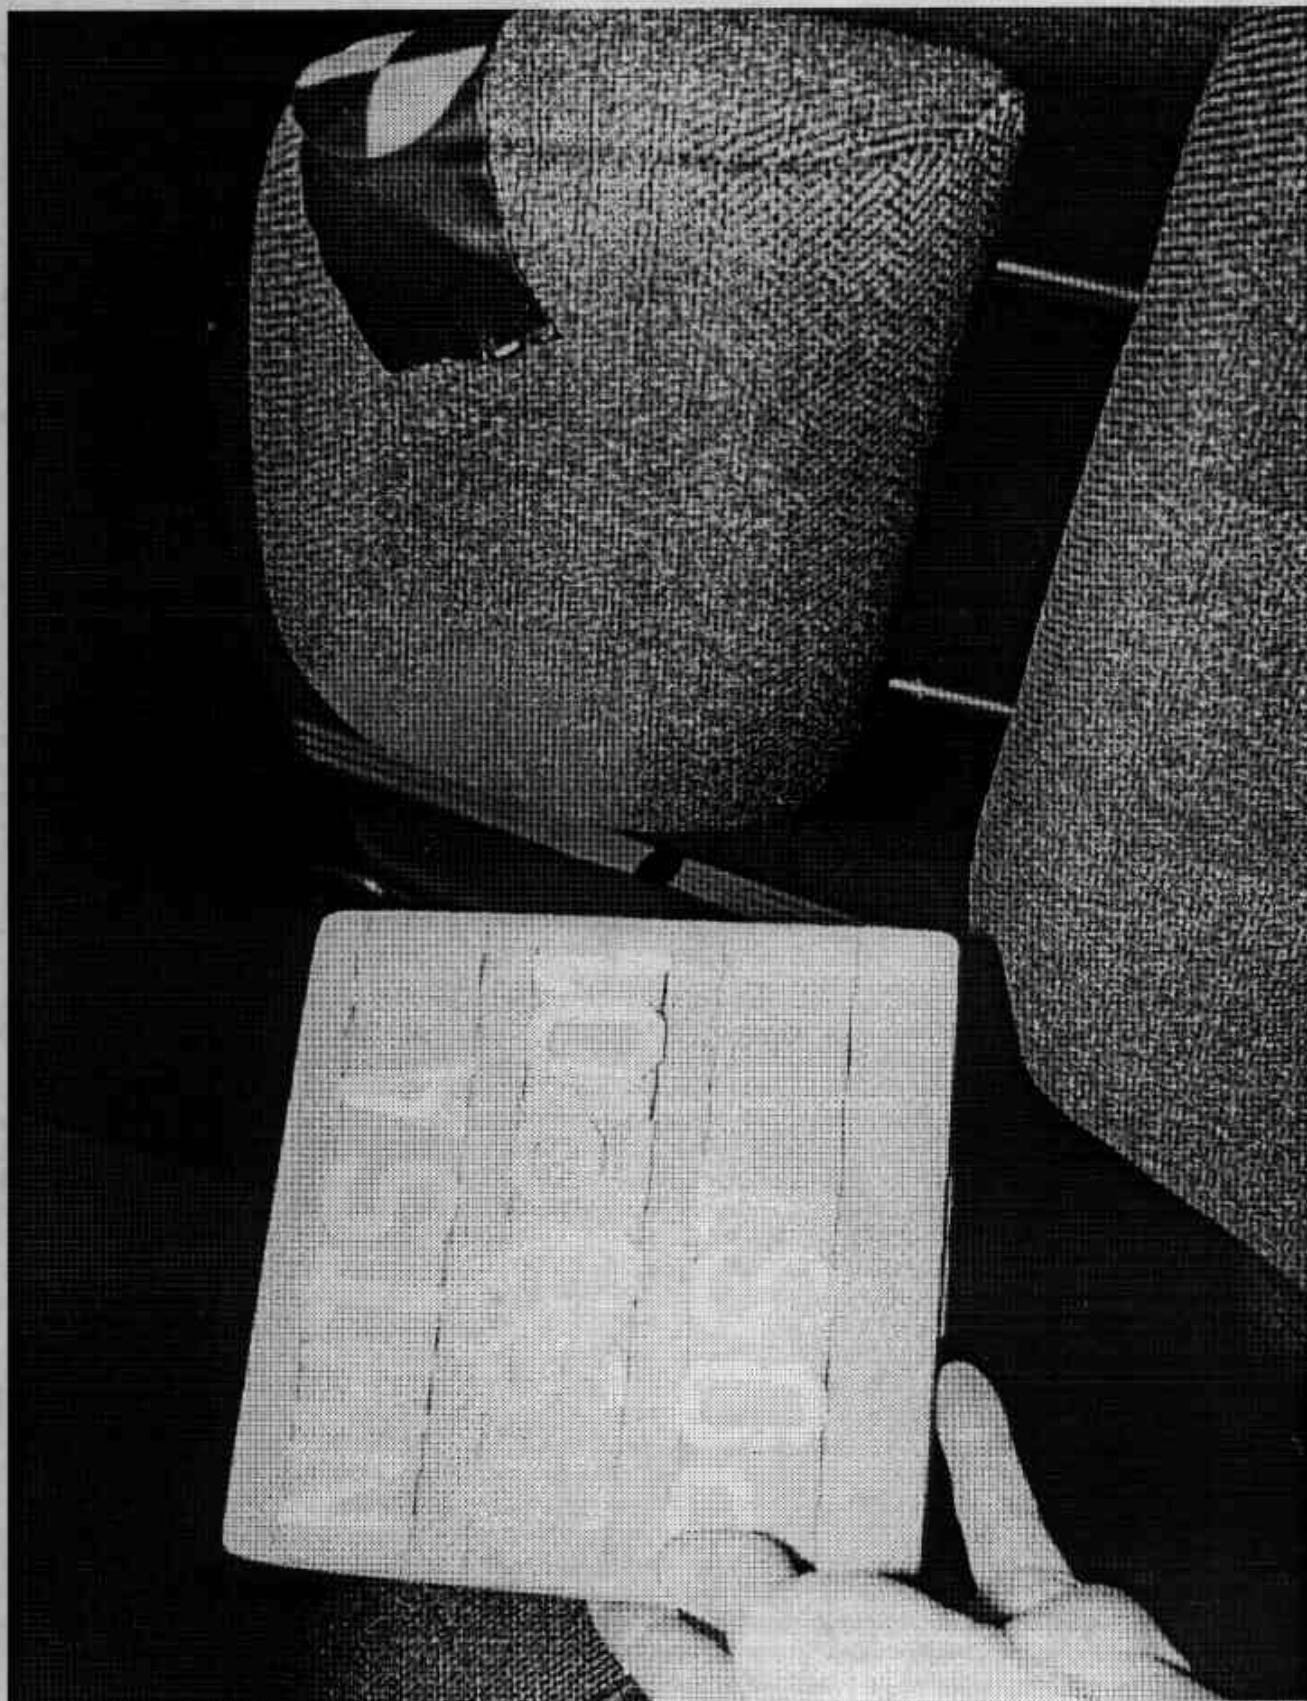


Figure A-23. Post-Test Driver Dummy Head Contact - View 3
A-24

950201

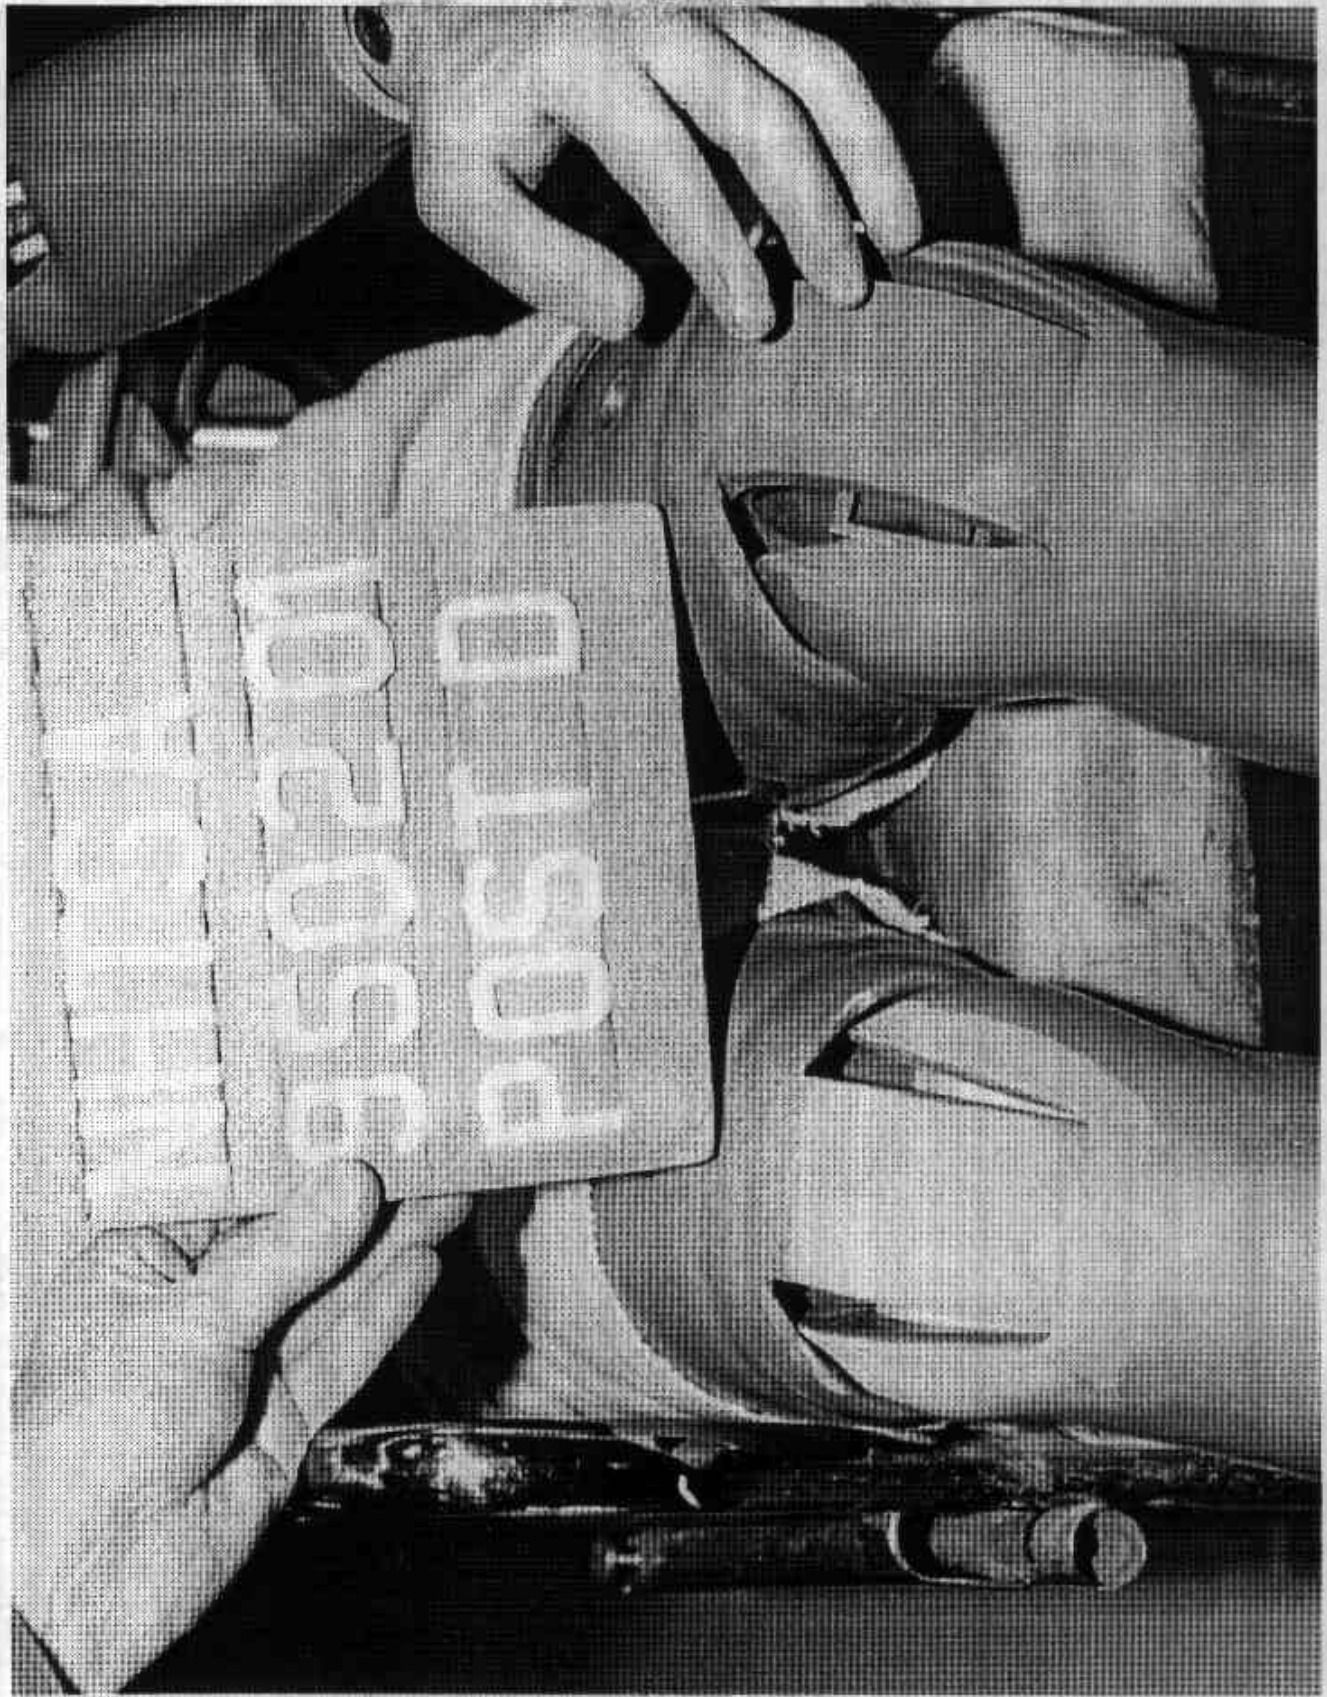


Figure A-24. Post-Test Driver Dummy Knee Contact - View 1
A-25

950201

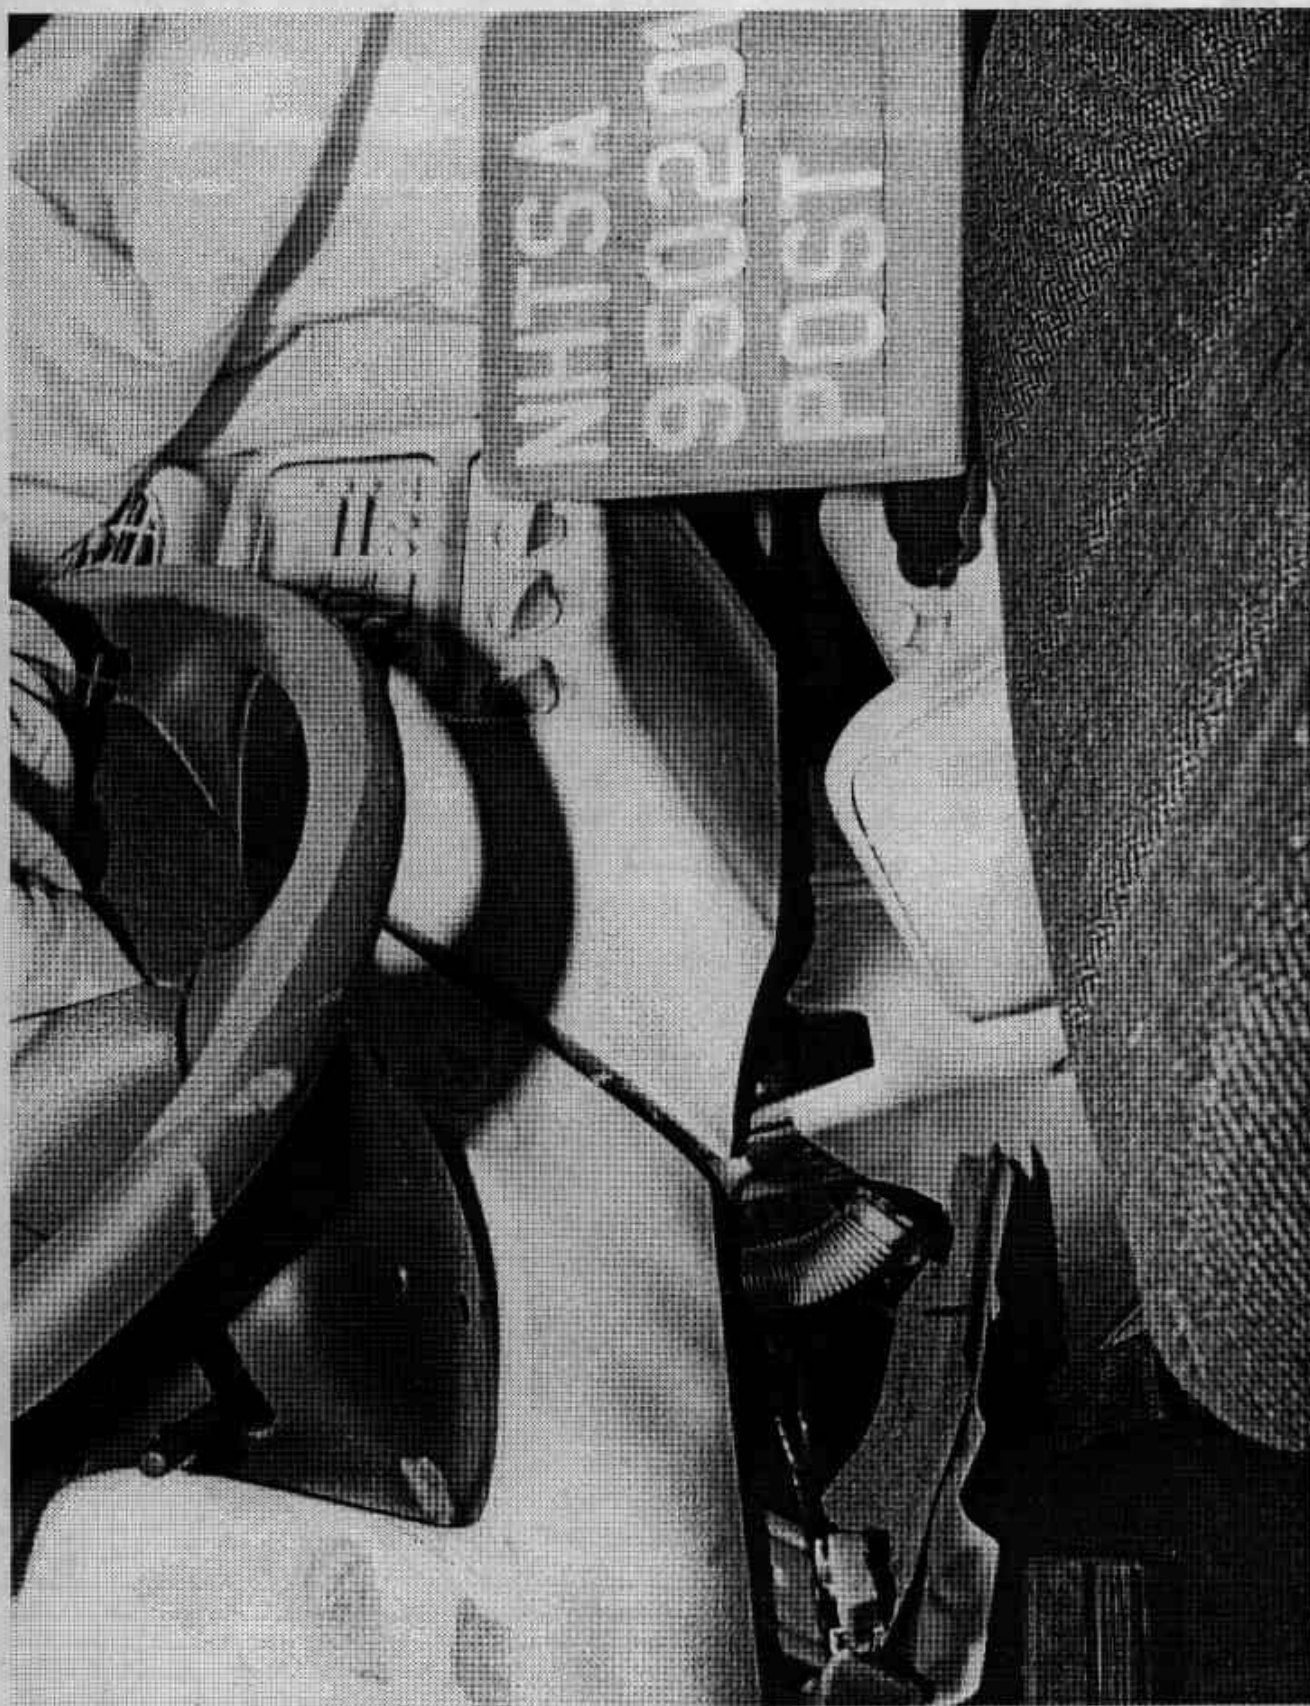


Figure A-25. Post-Test Driver Dummy Knee Contact - View 2

A-26

950201

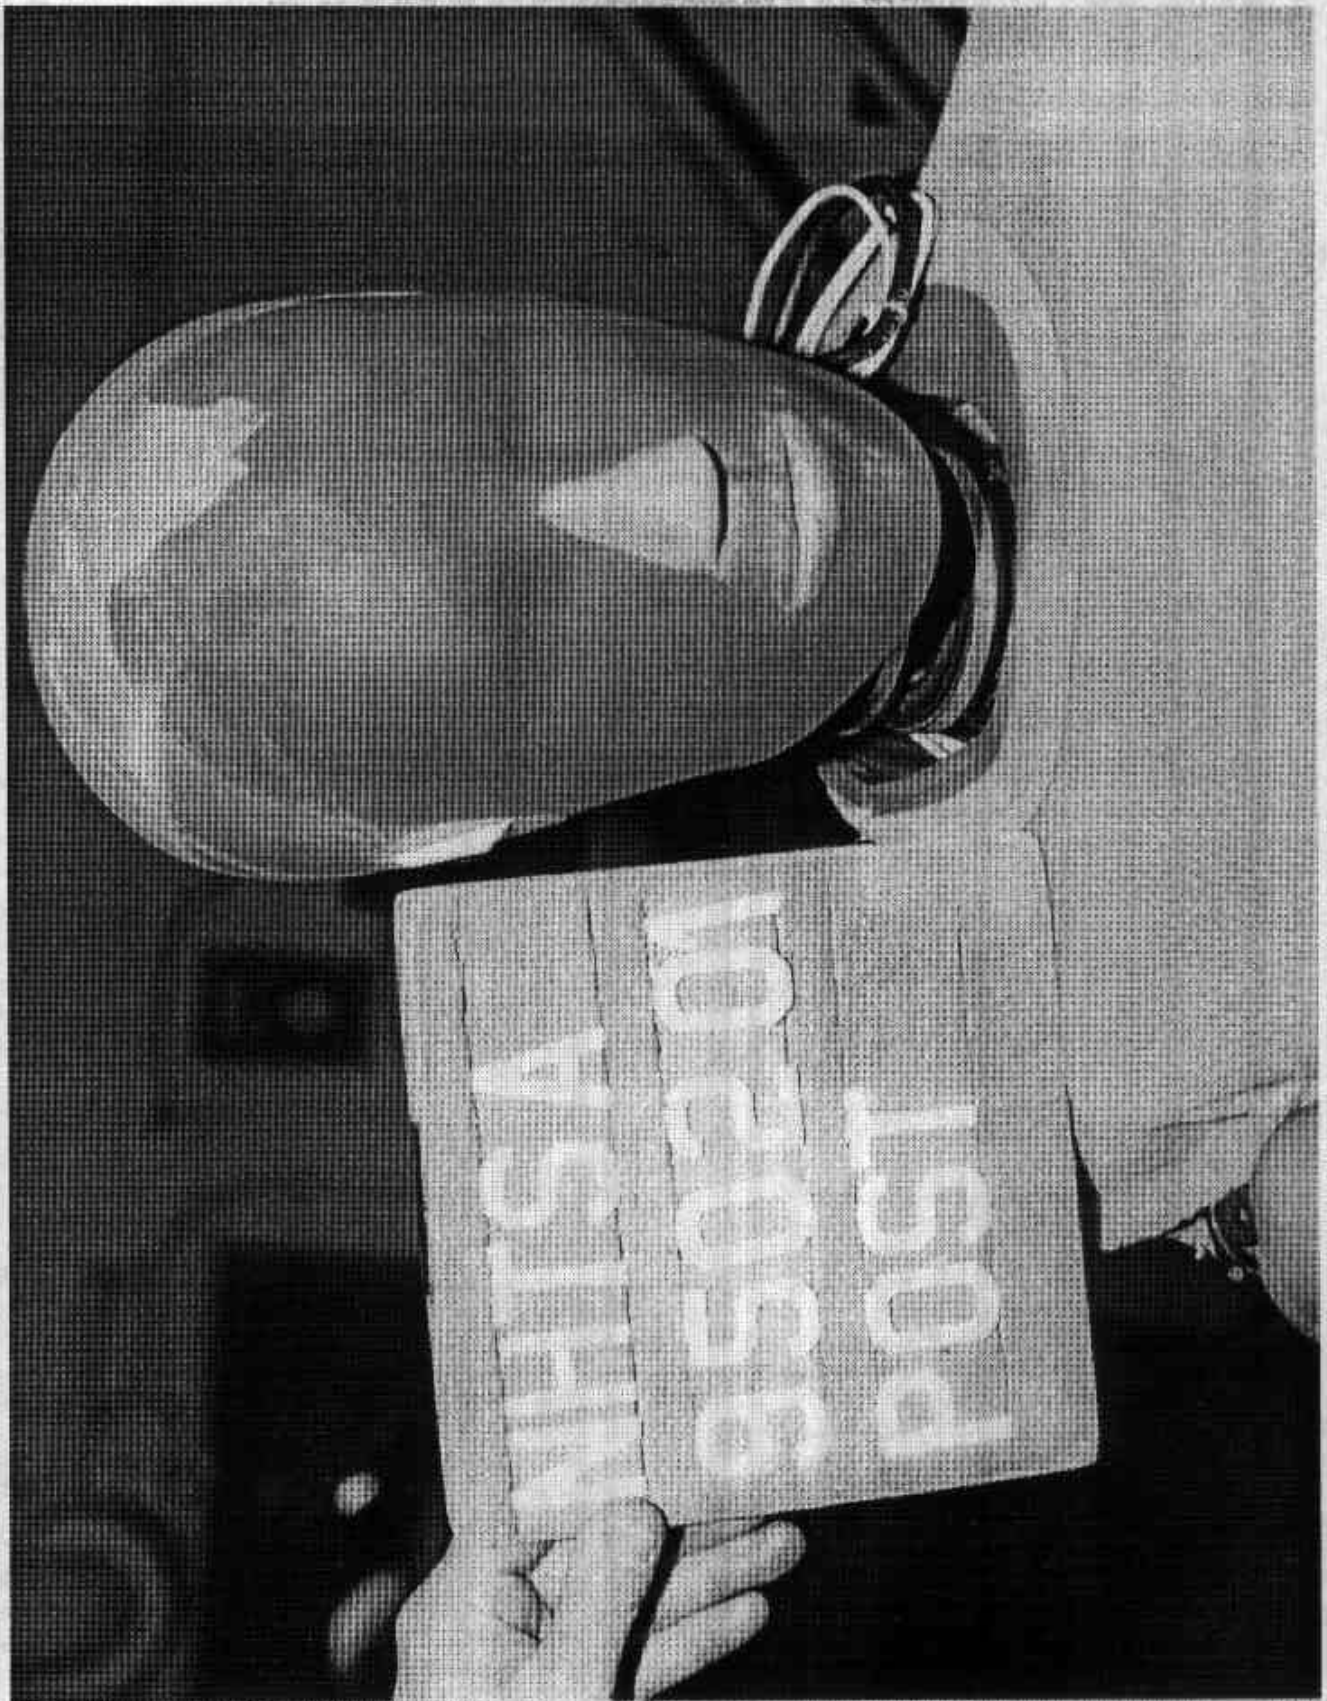


Figure A-26. Post-Test Passenger Dummy Head Contact - View 1
A-27

950201



Figure A-27. Post-Test Passenger Dummy Head Contact - View 2

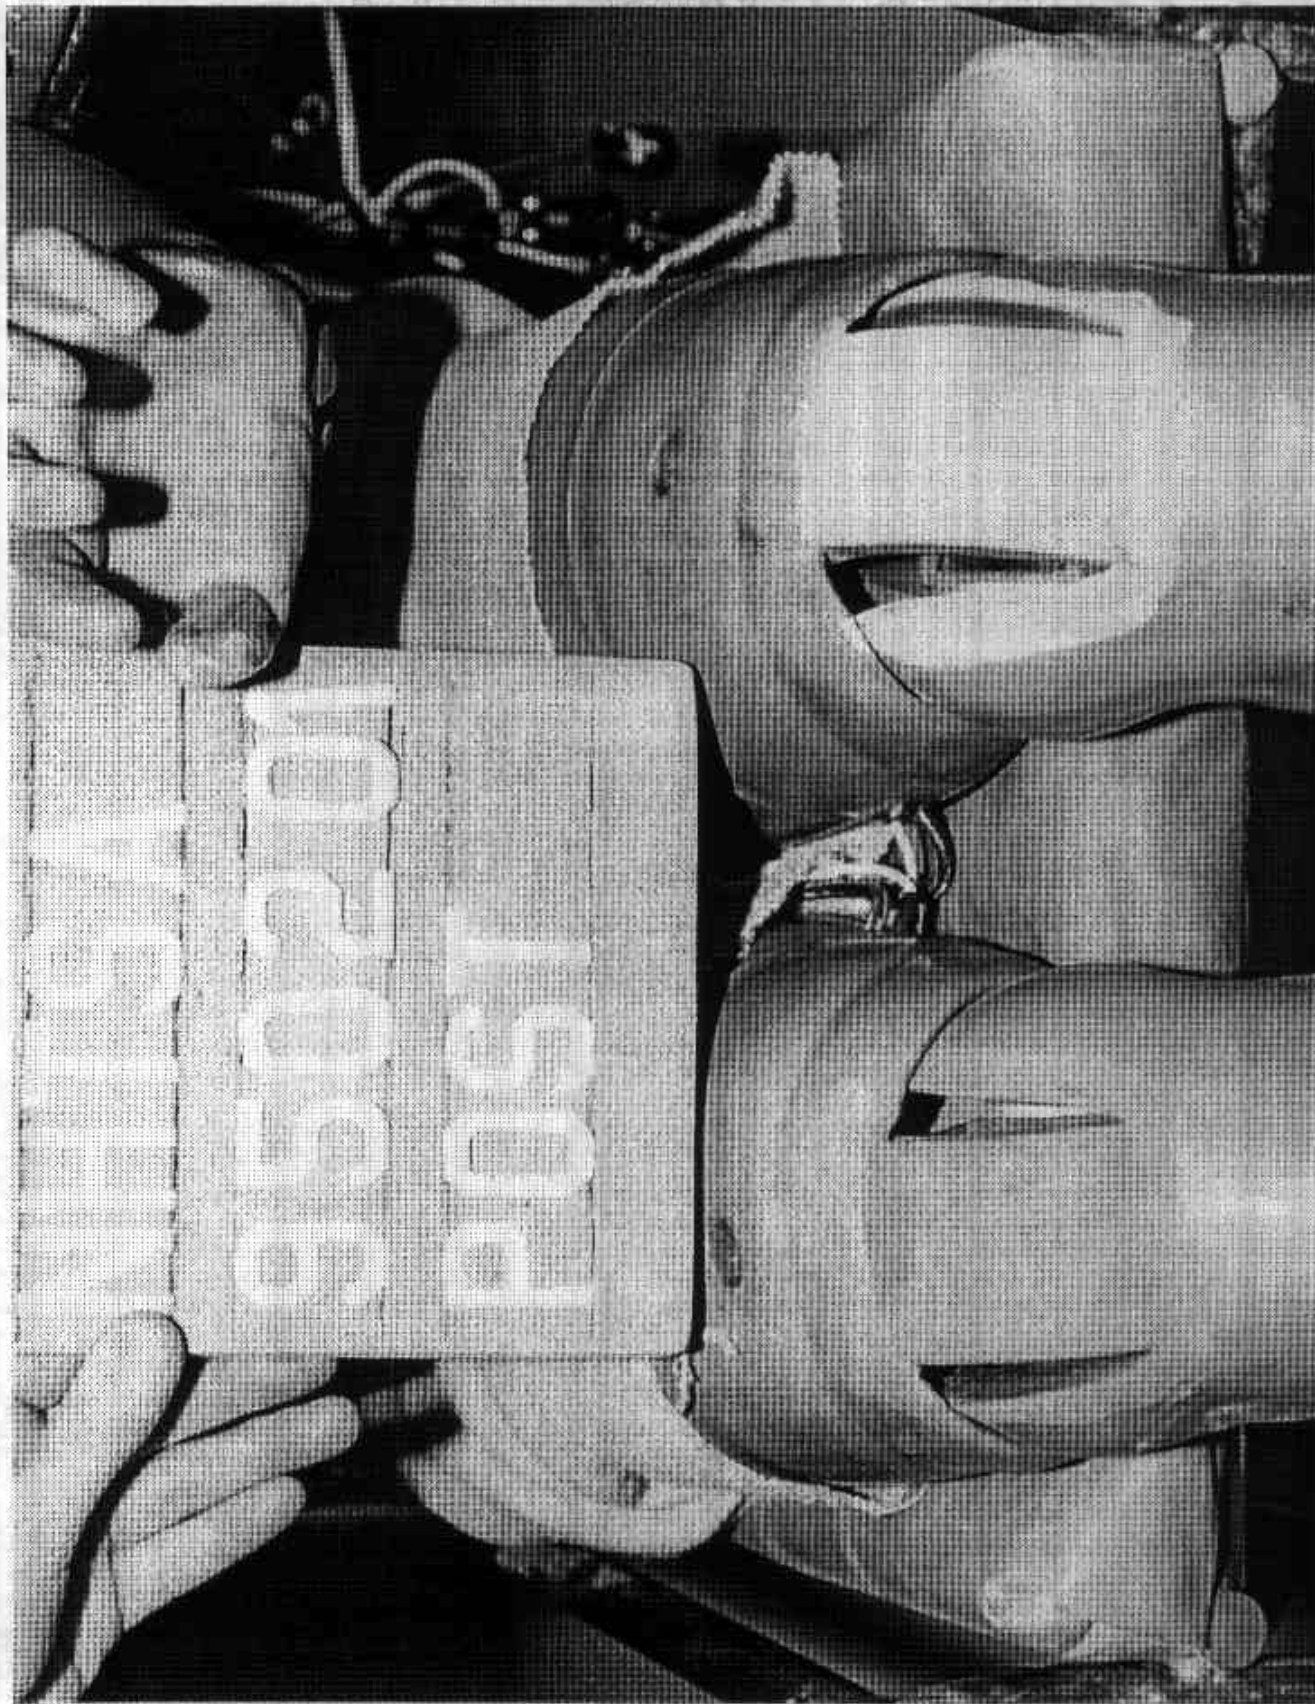


Figure A-28. Post-Test Passenger Dummy Knee Contact - View 1

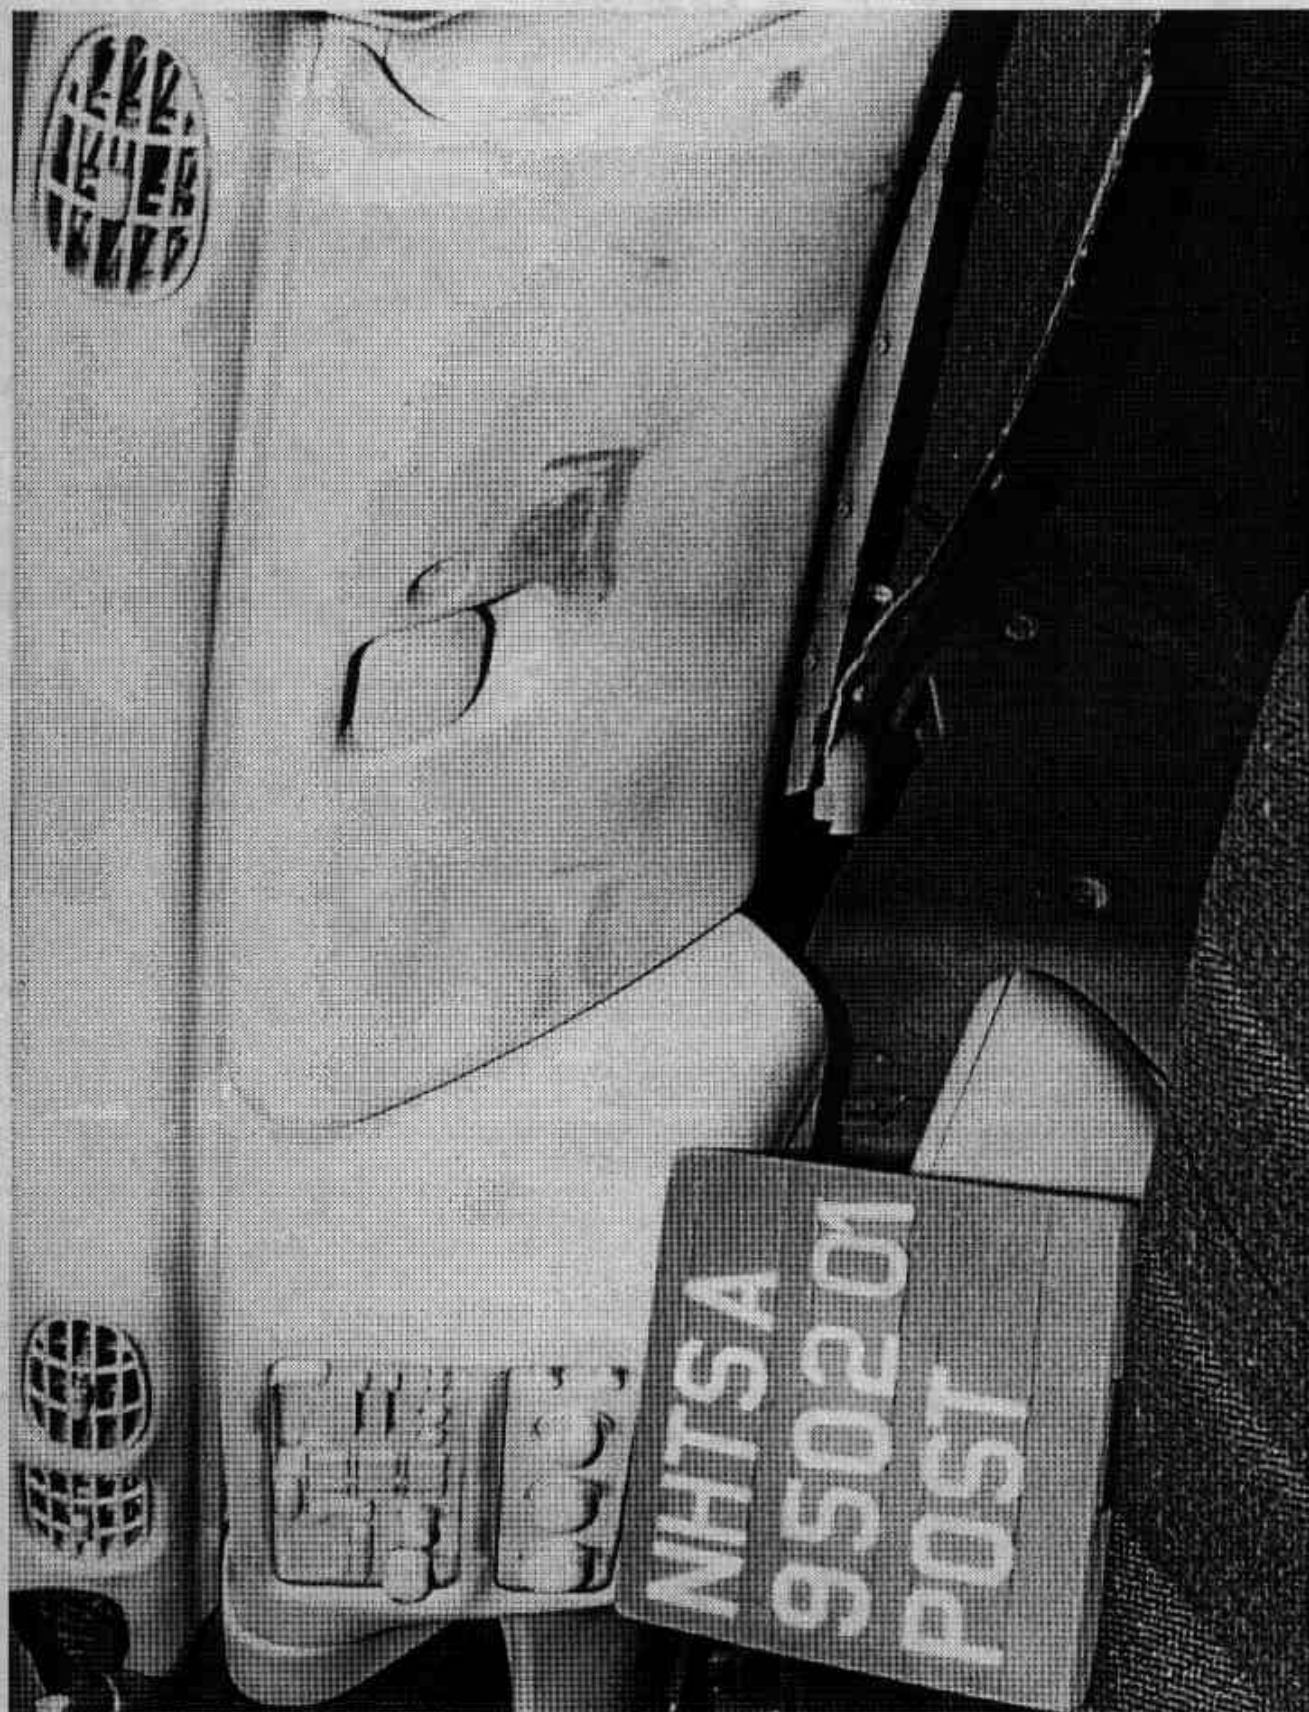


Figure A-29. Post-Test Passenger Dummy Knee Contact - View 2

A-30

950201

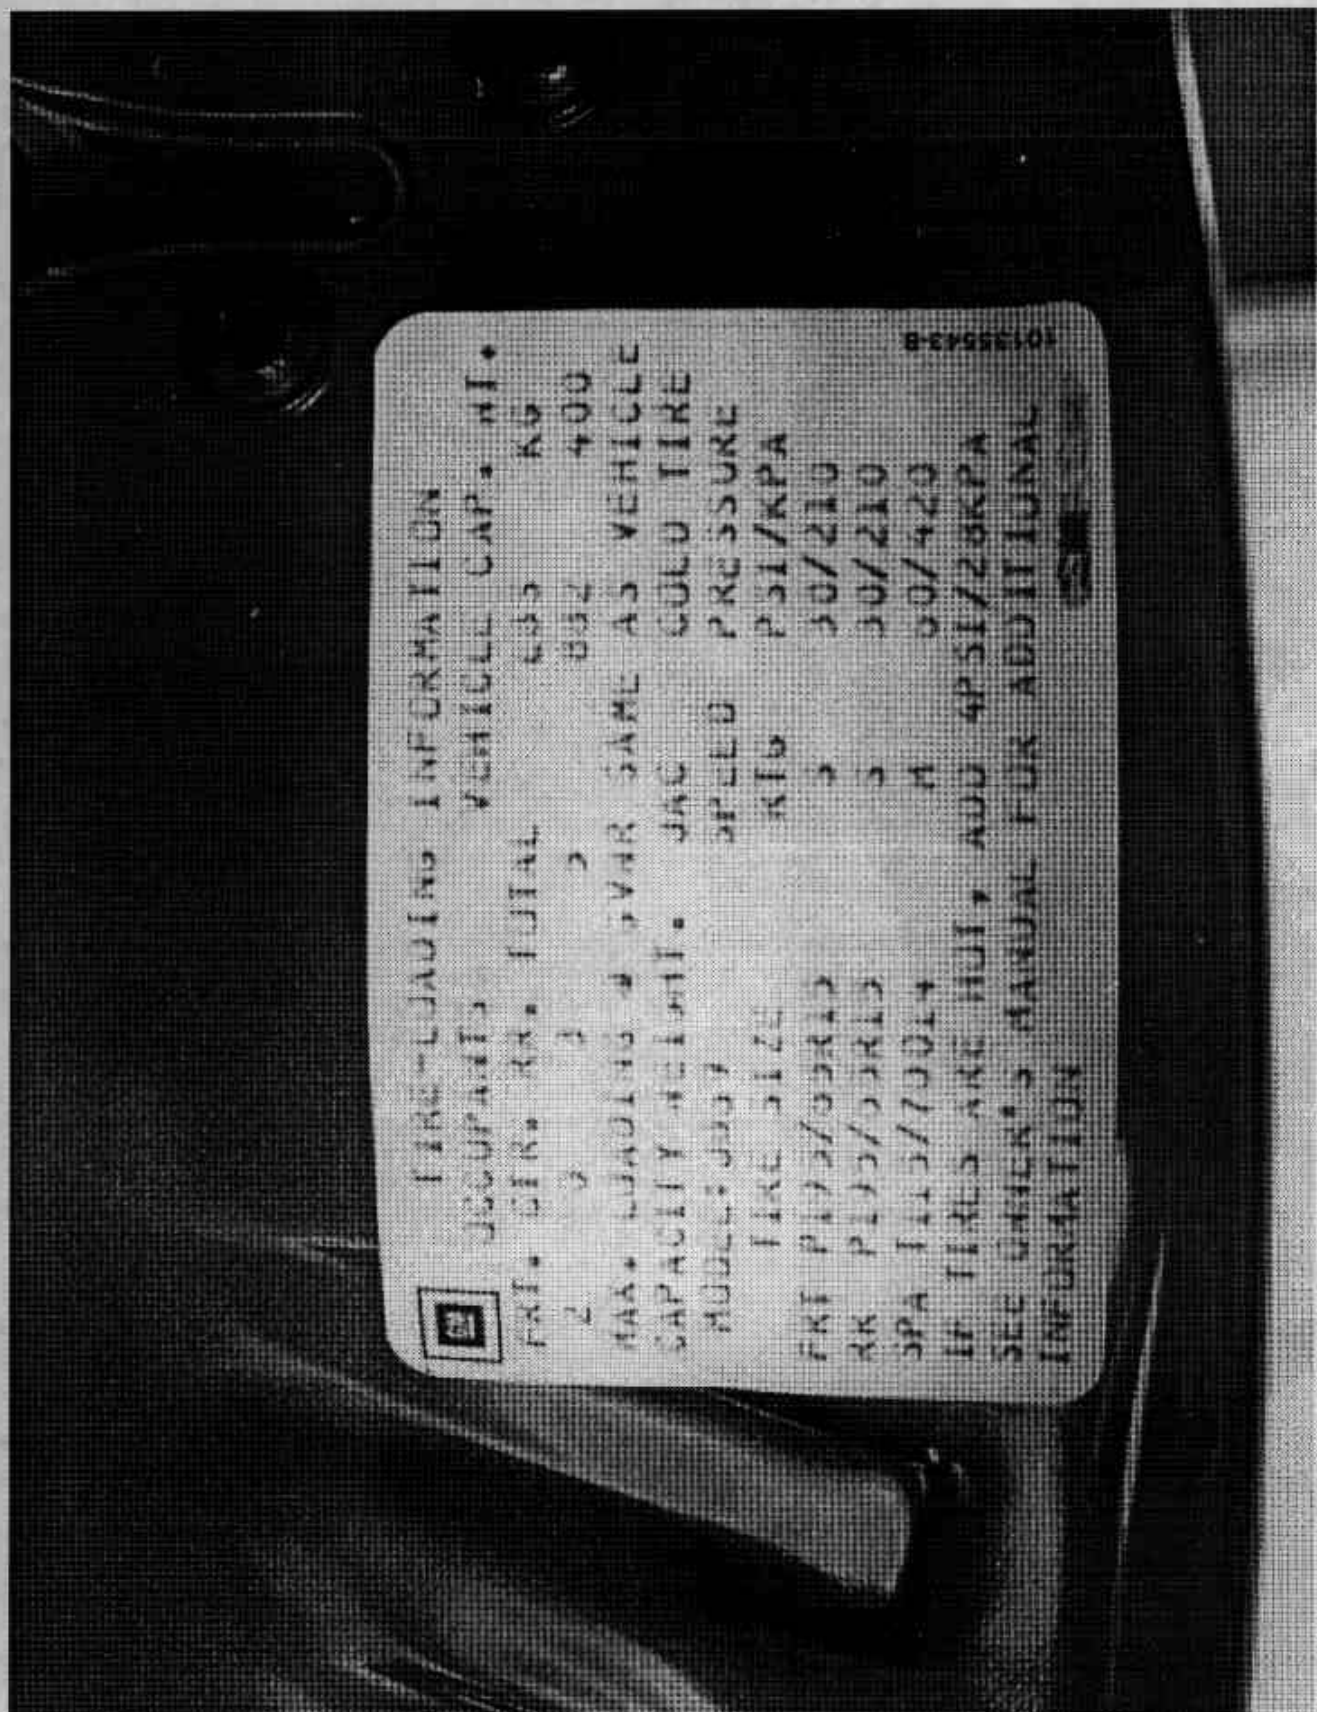



Fig. A-31. Pre-test Recommended Tire Pressure Label

Appendix B

Data Plots

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
 DRIVER HEAD X-AXIS ACCELERATION
 208 COMPLIANCE TESTING CS0114

TEST NUMBER: 950201

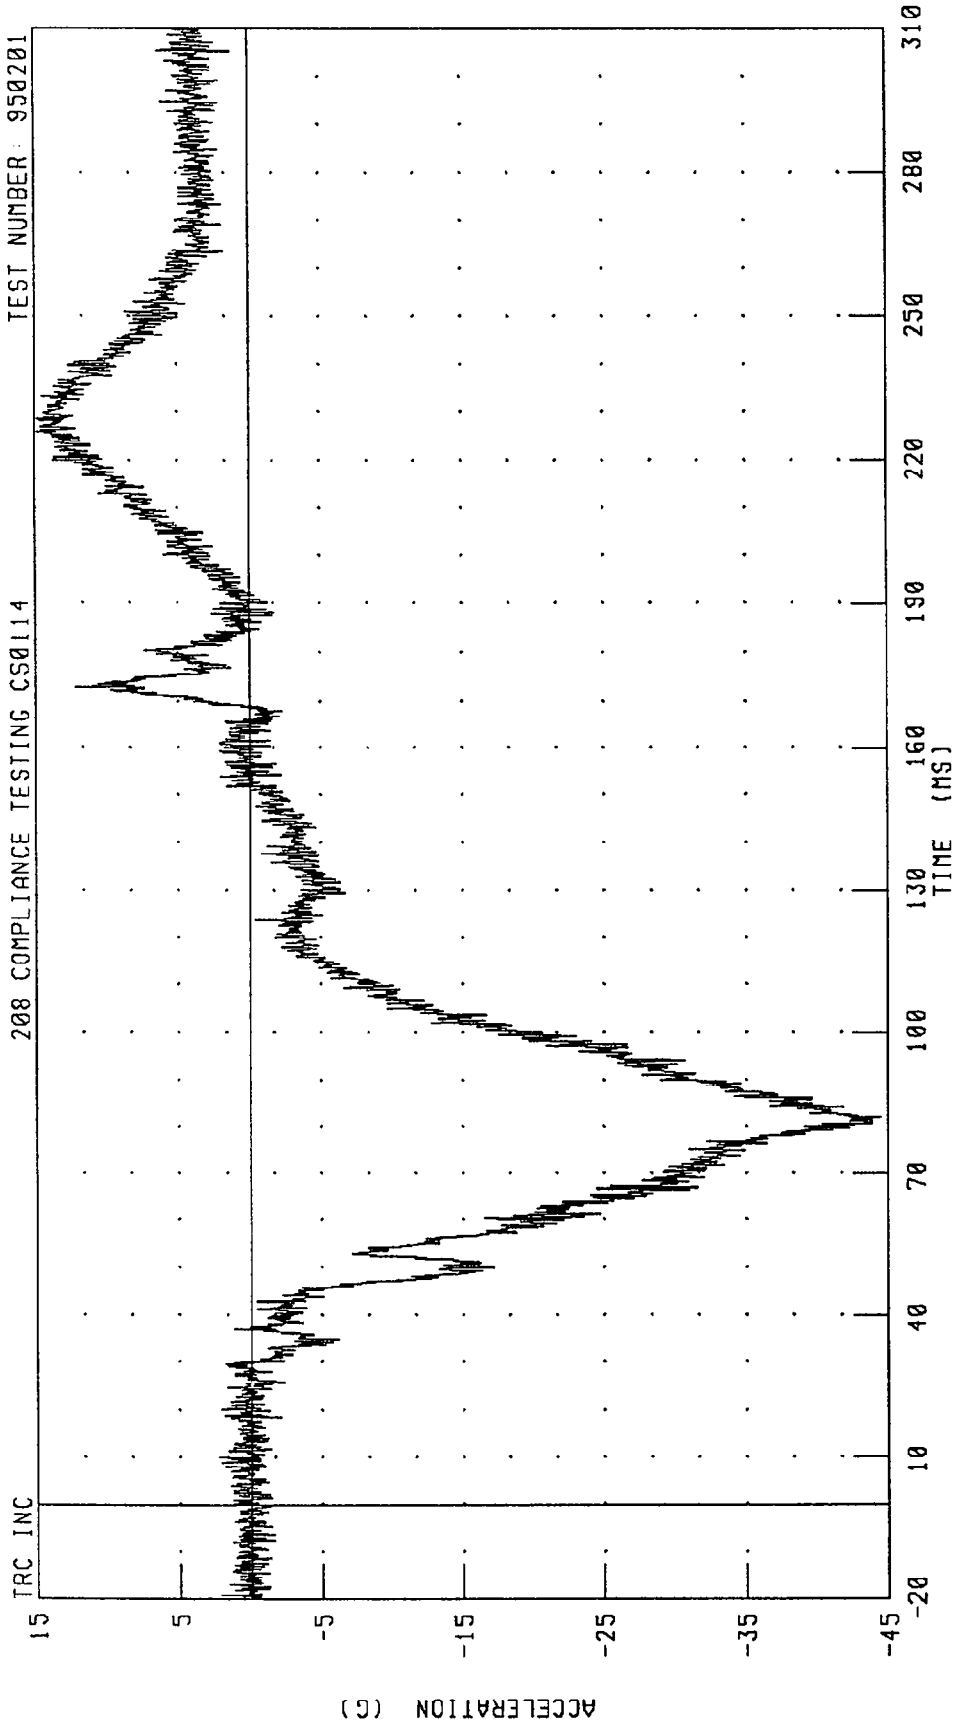


CHANNEL: HEDXG1 FILTER: CH CLASS 1000

950201

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
 DRIVER HEAD Y-AXIS ACCELERATION
 208 COMPLIANCE TESTING CS0114

TEST NUMBER: 950201

TRC INC.

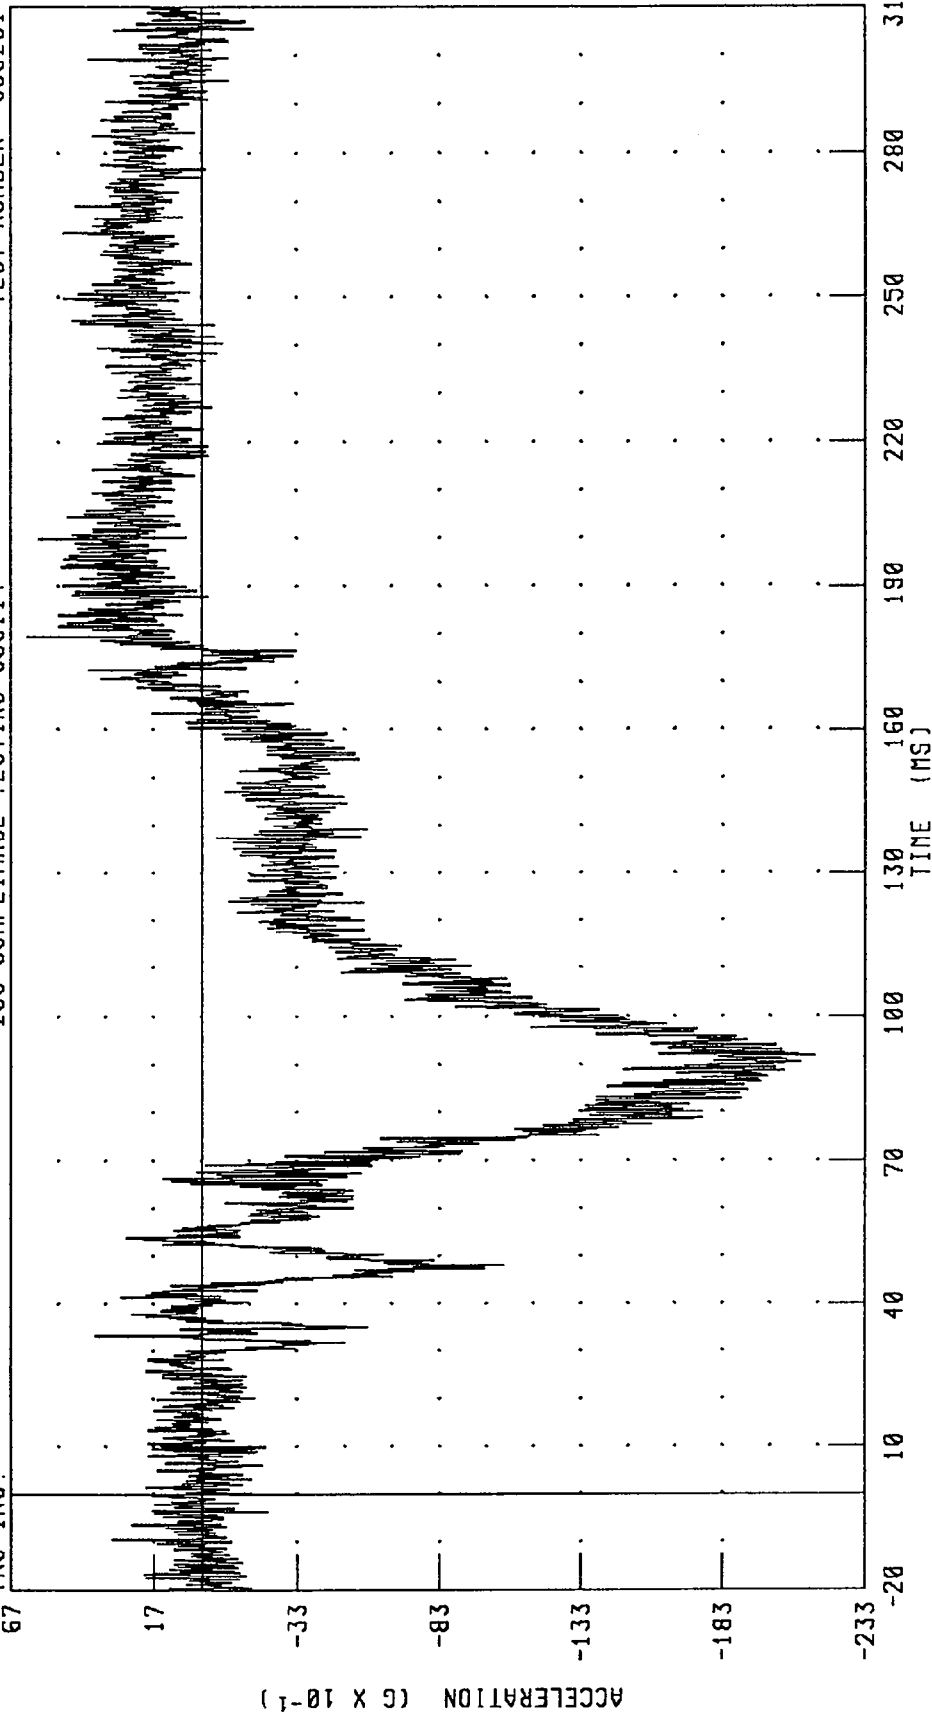


CHANNEL: HEDYG1 FILTER: CH. CLASS 1000

PEAK DATA: 6.09 G @ 179.44 MS; -21.53 G @ 91.84 MS

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
 DRIVER HEAD Z-AXIS ACCELERATION
 208 COMPLIANCE TESTING CS0114

TEST NUMBER: 950201

TRC INC.

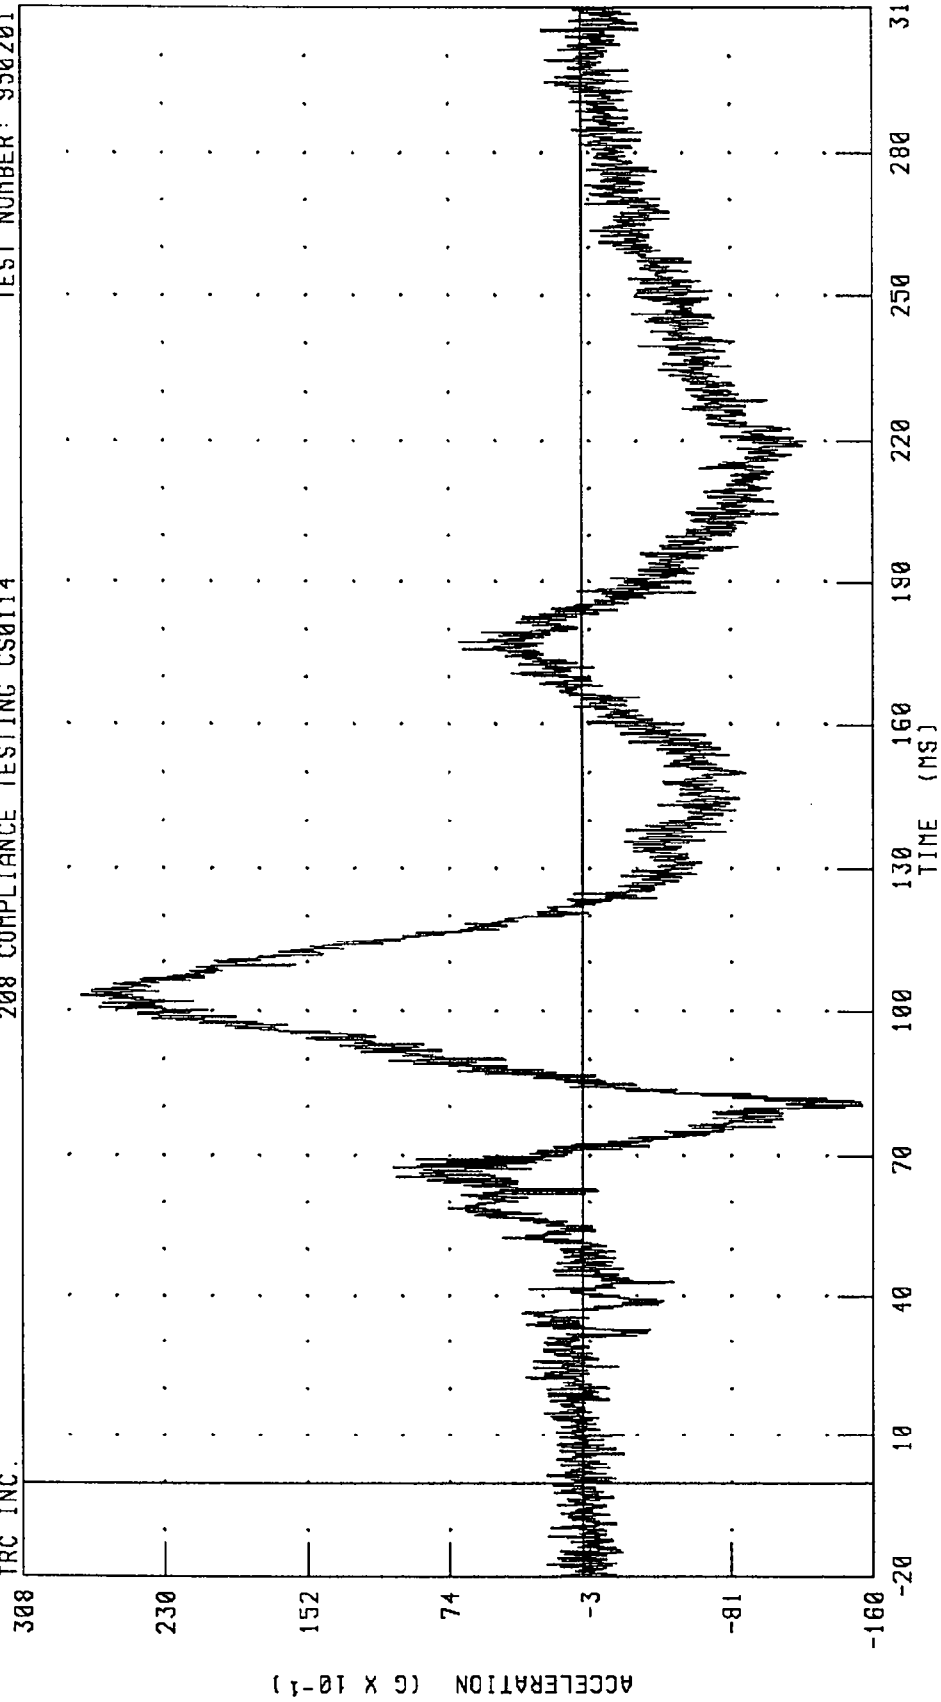

CHANNEL: HEDZG1 FILTER: CH. CLASS 1000


PEAK DATA: 27.57 G @ 103.12 MS; -15.40 G @ 80.48 MS

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
DRIVER HEAD RESULTANT ACCELERATION

TEST NUMBER: 950201

208 COMPLIANCE TESTING CS0114

TRC INC.

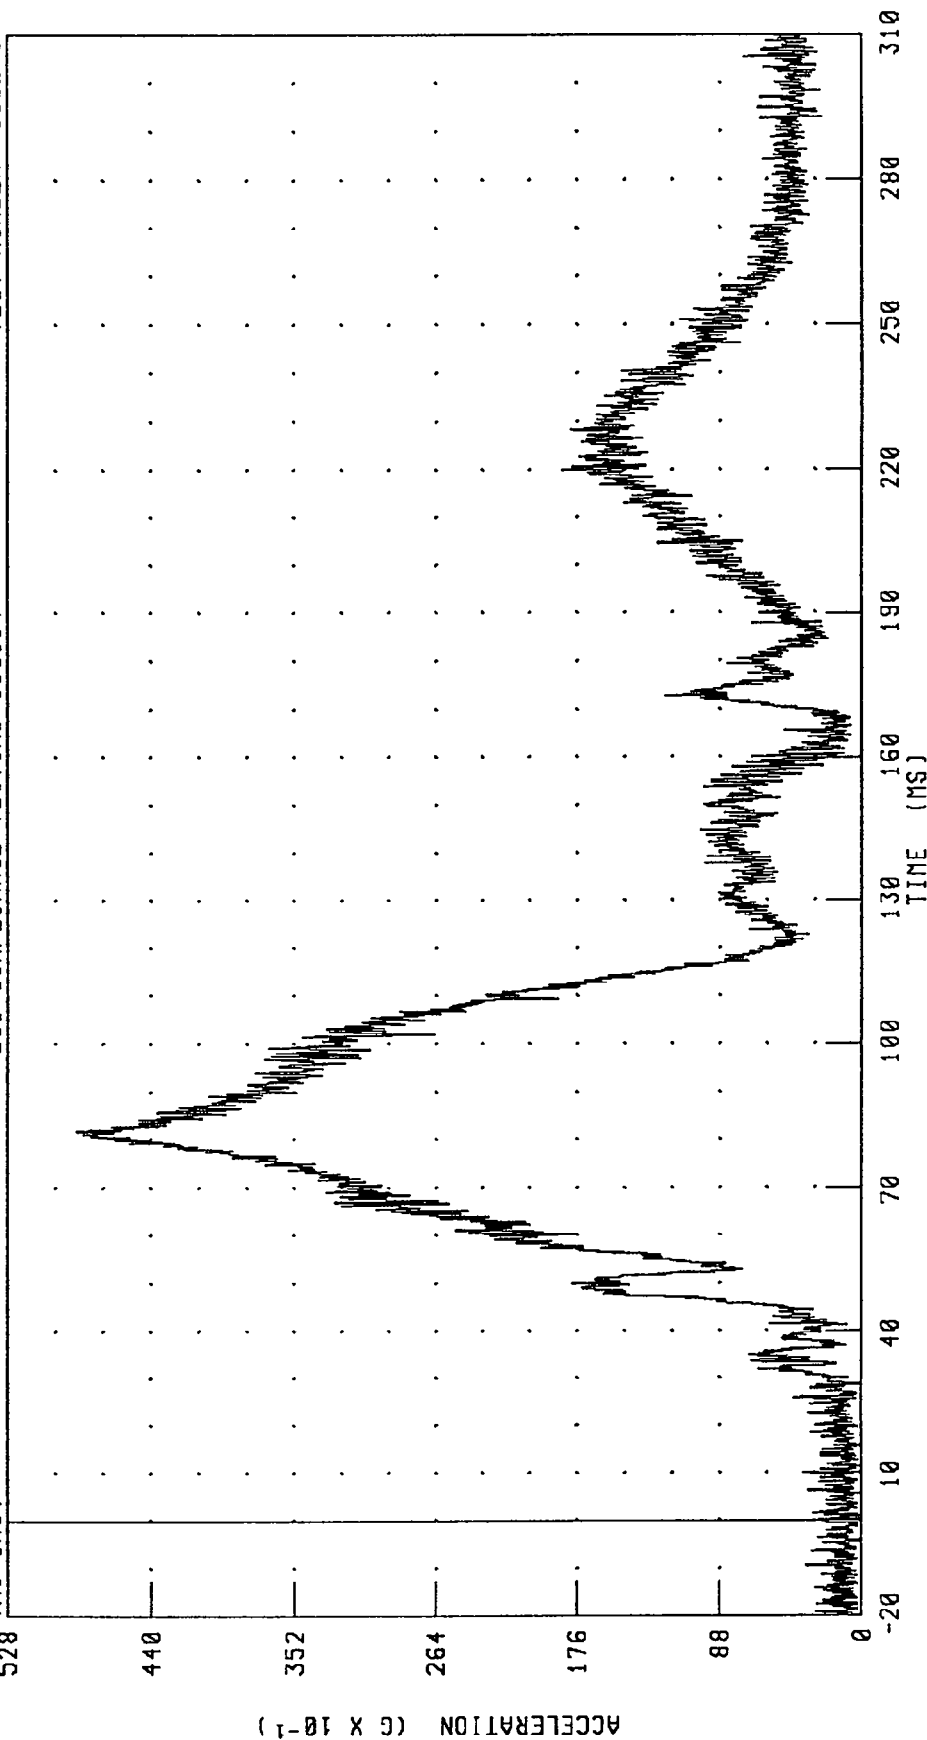

PEAK DATA: 48.50 G @ 81.76 MS; 0.10 G @ 0.16 MS


CHANNEL: HEDRG1 FILTER: CH. CLASS 1000

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
DRIVER CHEST X-AXIS ACCELERATION

TEST NUMBER: 950201

208 COMPLIANCE TESTING CS0114

TRC INC.

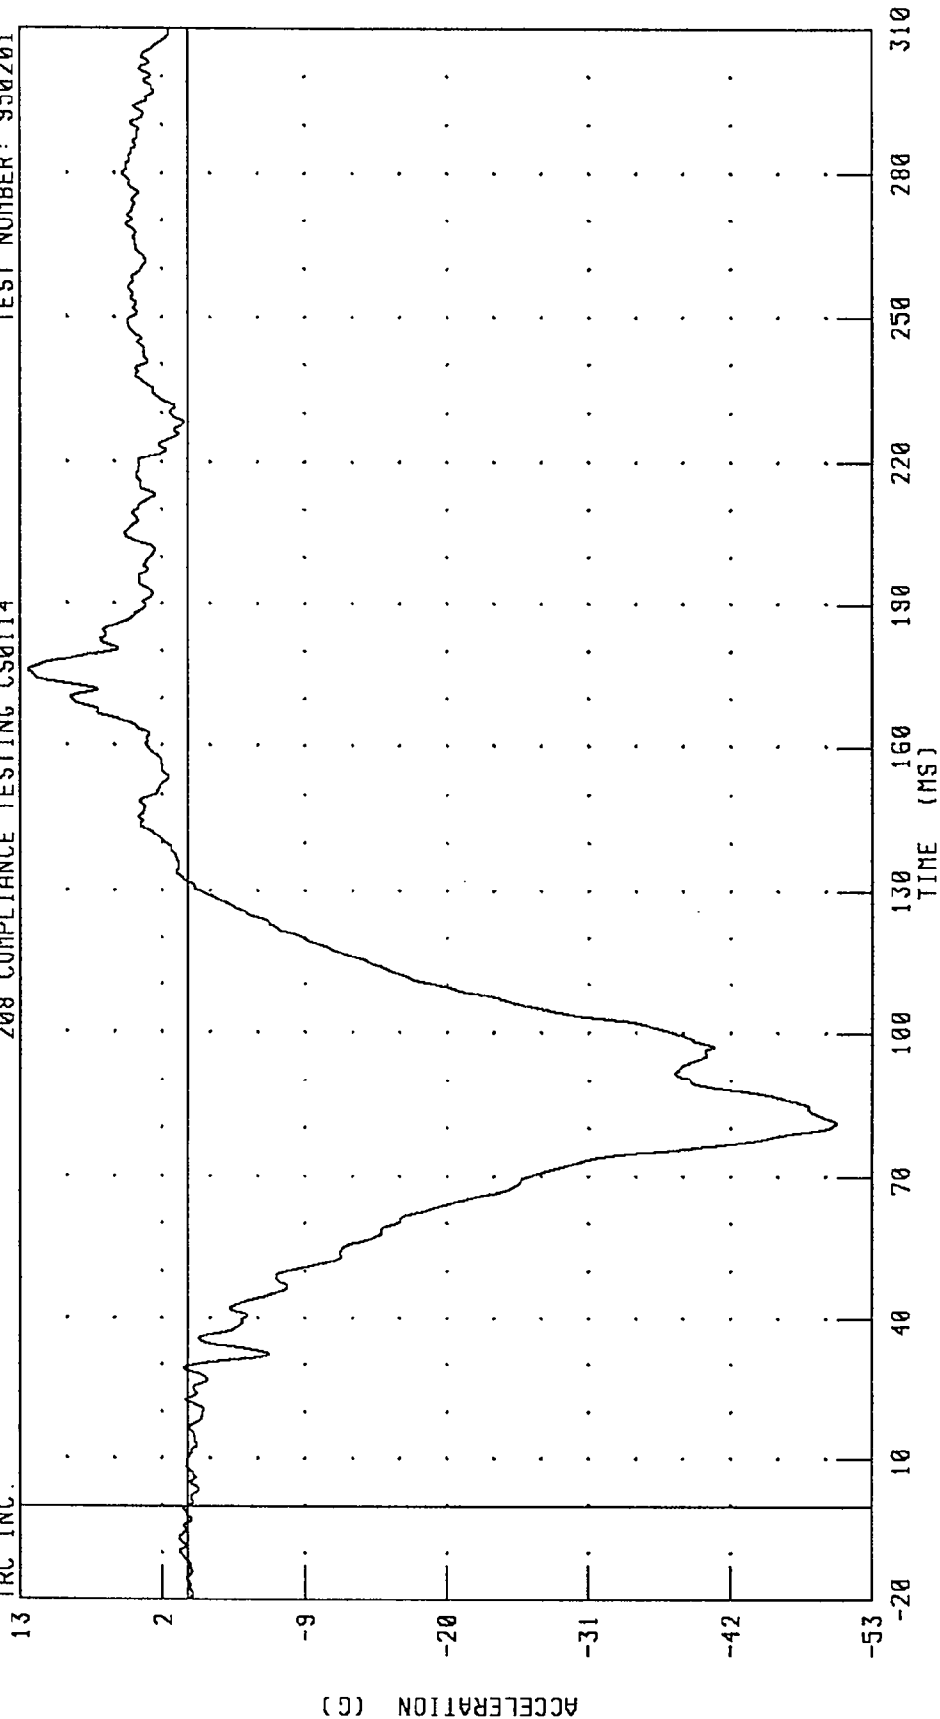


CHANNEL: CSTXG1 FILTER: CH. CLASS 180

PEAK DATA: 12.32 G @ 176.00 MS; -50.17 G @ 81.28 MS

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
 DRIVER CHEST Y-AXIS ACCELERATION
 208 COMPLIANCE TESTING CS0114

TEST NUMBER: 950201

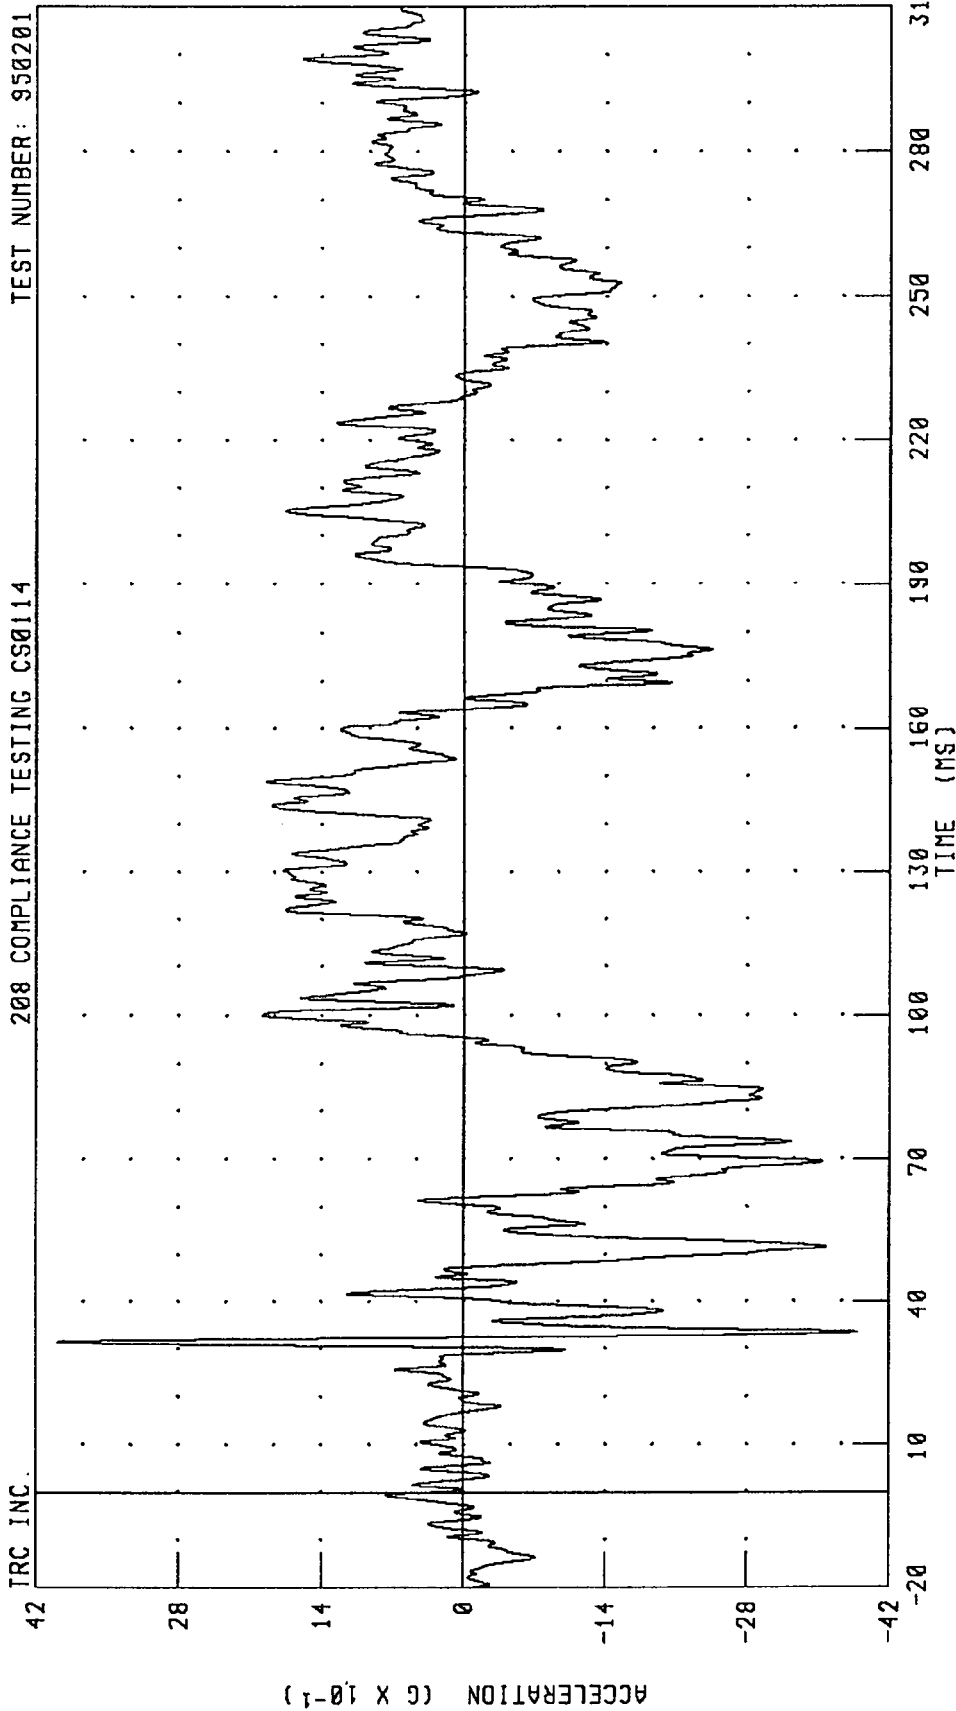


CHANNEL: CSTYG1 FILTER: CH. CLASS 180

PEAK DATA: 3.98 G @ 31.44 MS; -3.89 G @ 33.68 MS

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
 DRIVER CHEST Z-AXIS ACCELERATION
 208 COMPLIANCE TESTING CS0114

TEST NUMBER: 950201

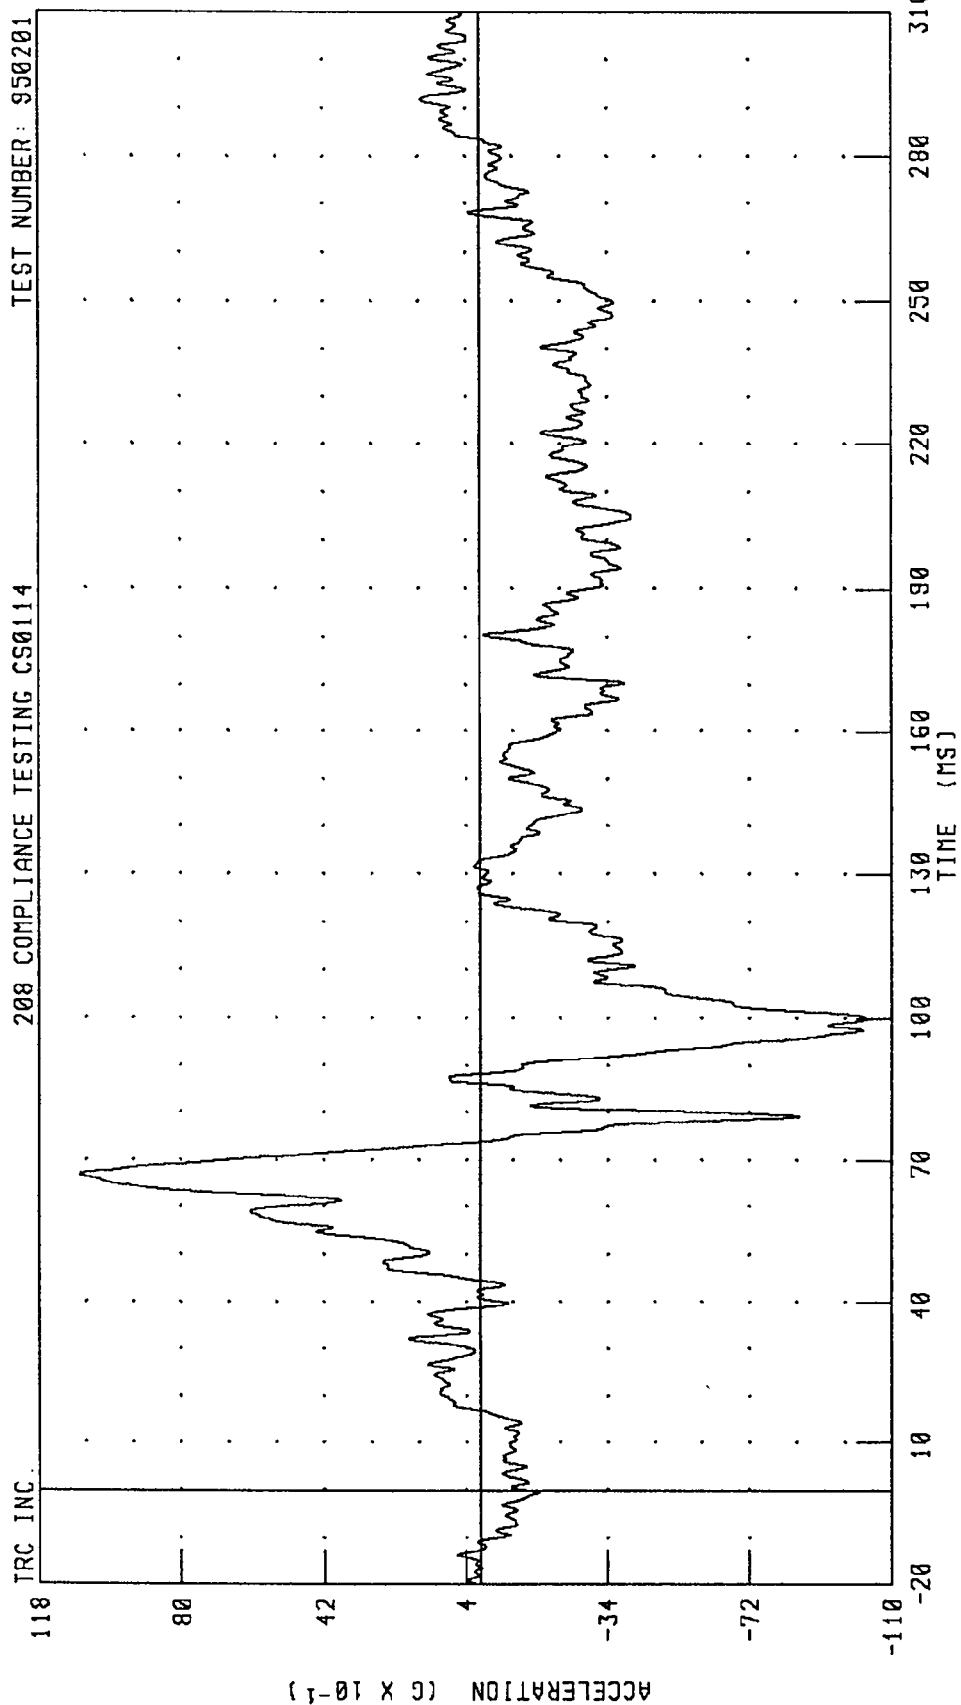


PEAK DATA: 10.71 G @ 66.96 MS; -10.32 G @ 99.84 MS

CHANNEL: CSTZG1 FILTER: CH. CLASS 180

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
 DRIVER CHEST RESULTANT ACCELERATION
 208 COMPLIANCE TESTING CS0114

TEST NUMBER: 950201

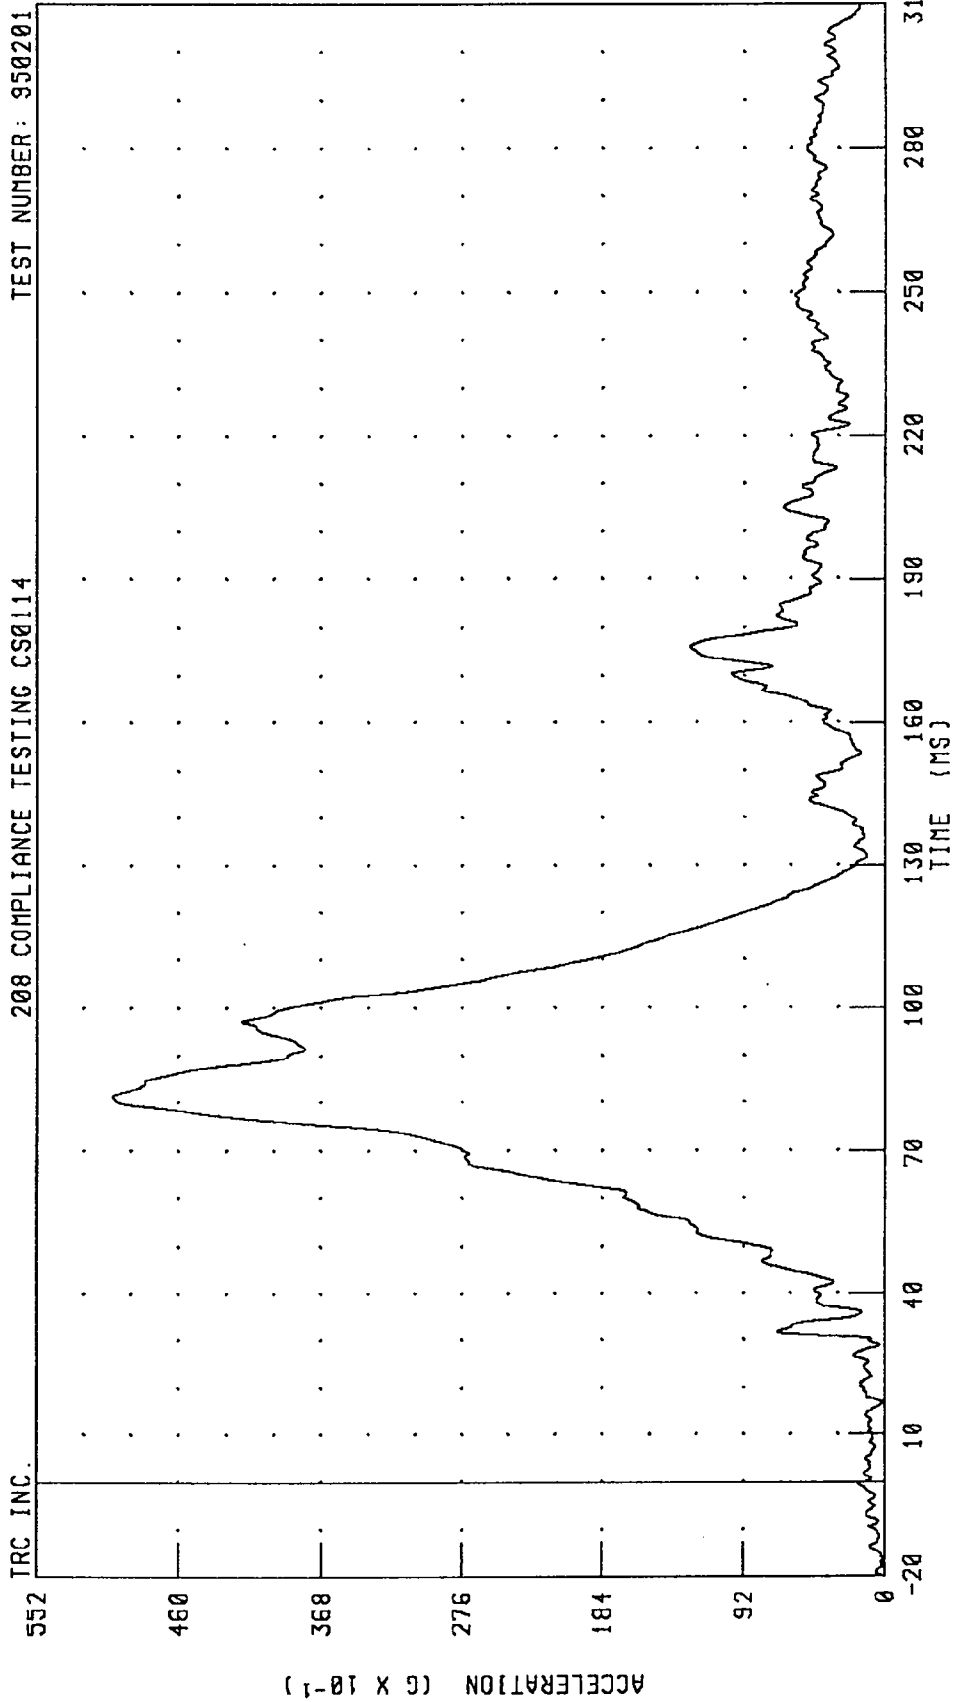


CHANNEL: CSTRG1 FILTER: CH. CLASS 180

PEAK DATA: 50.24 G @ 81.28 MS; 0.03 G @ 16.88 MS

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
DRIVER CHEST DEFLECTION

208 COMPLIANCE TESTING CS0114 TEST NUMBER 950201

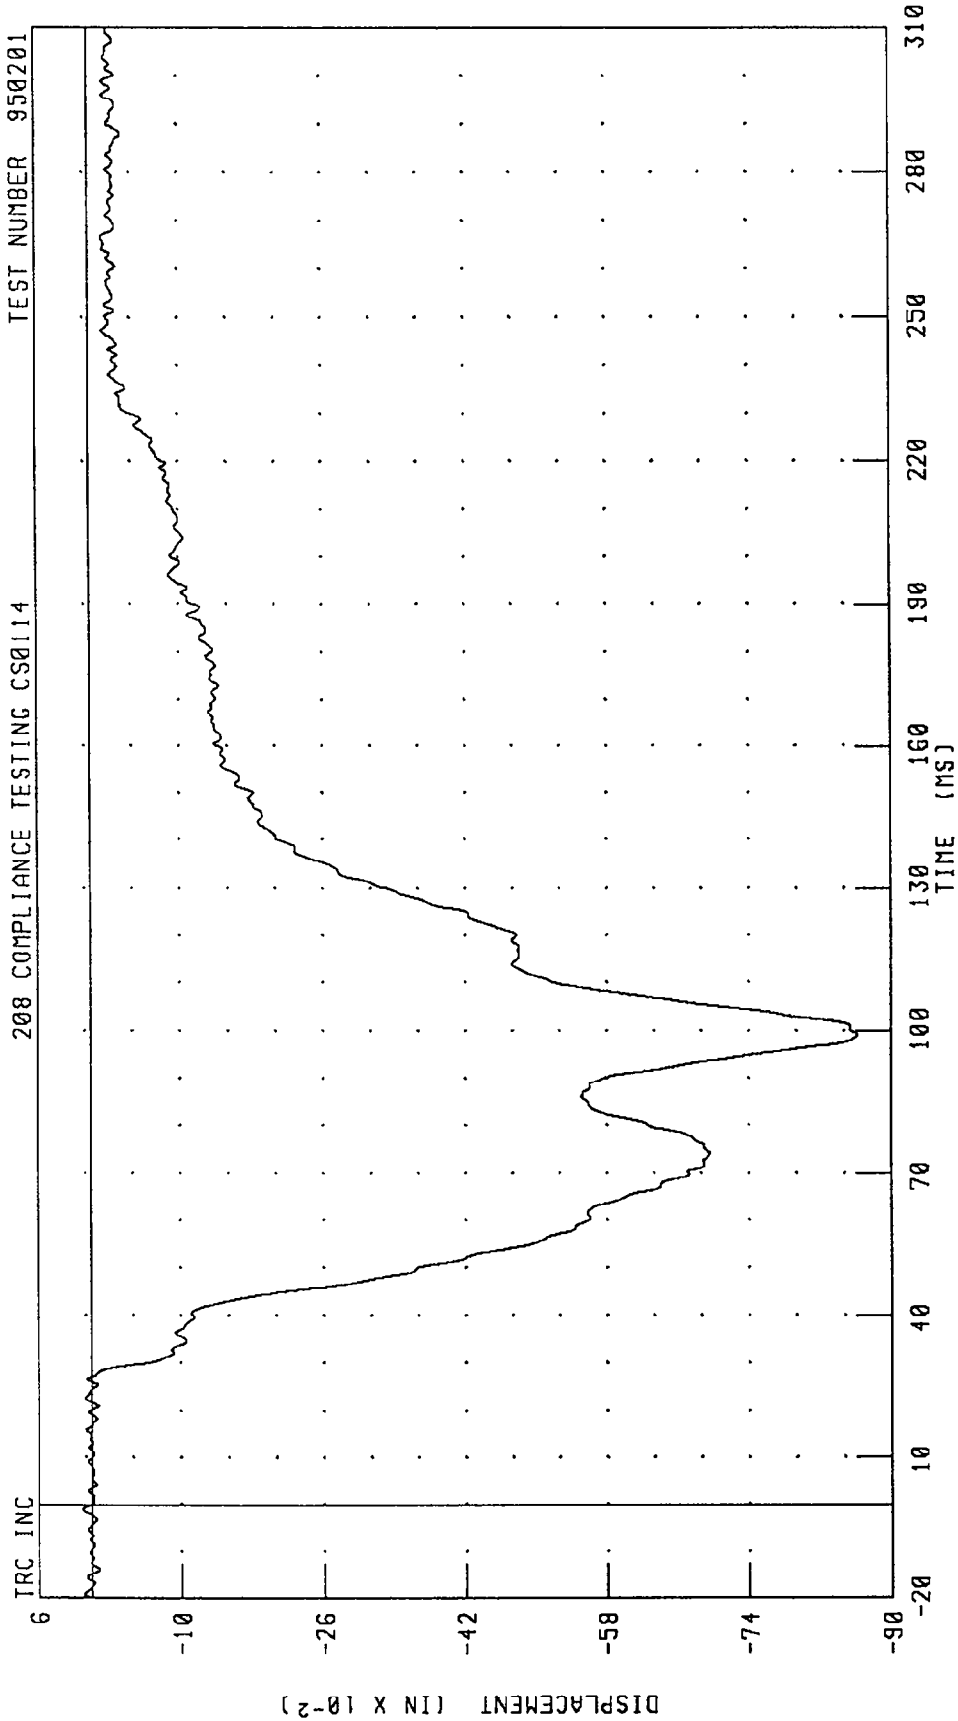

CHANNEL: CSTXD1 FILTER: CH. CLASS 180


1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER

DRIVER LEFT FEMUR FORCE

208 COMPLIANCE TESTING CS0114


TEST NUMBER: 950201

TRC INC.

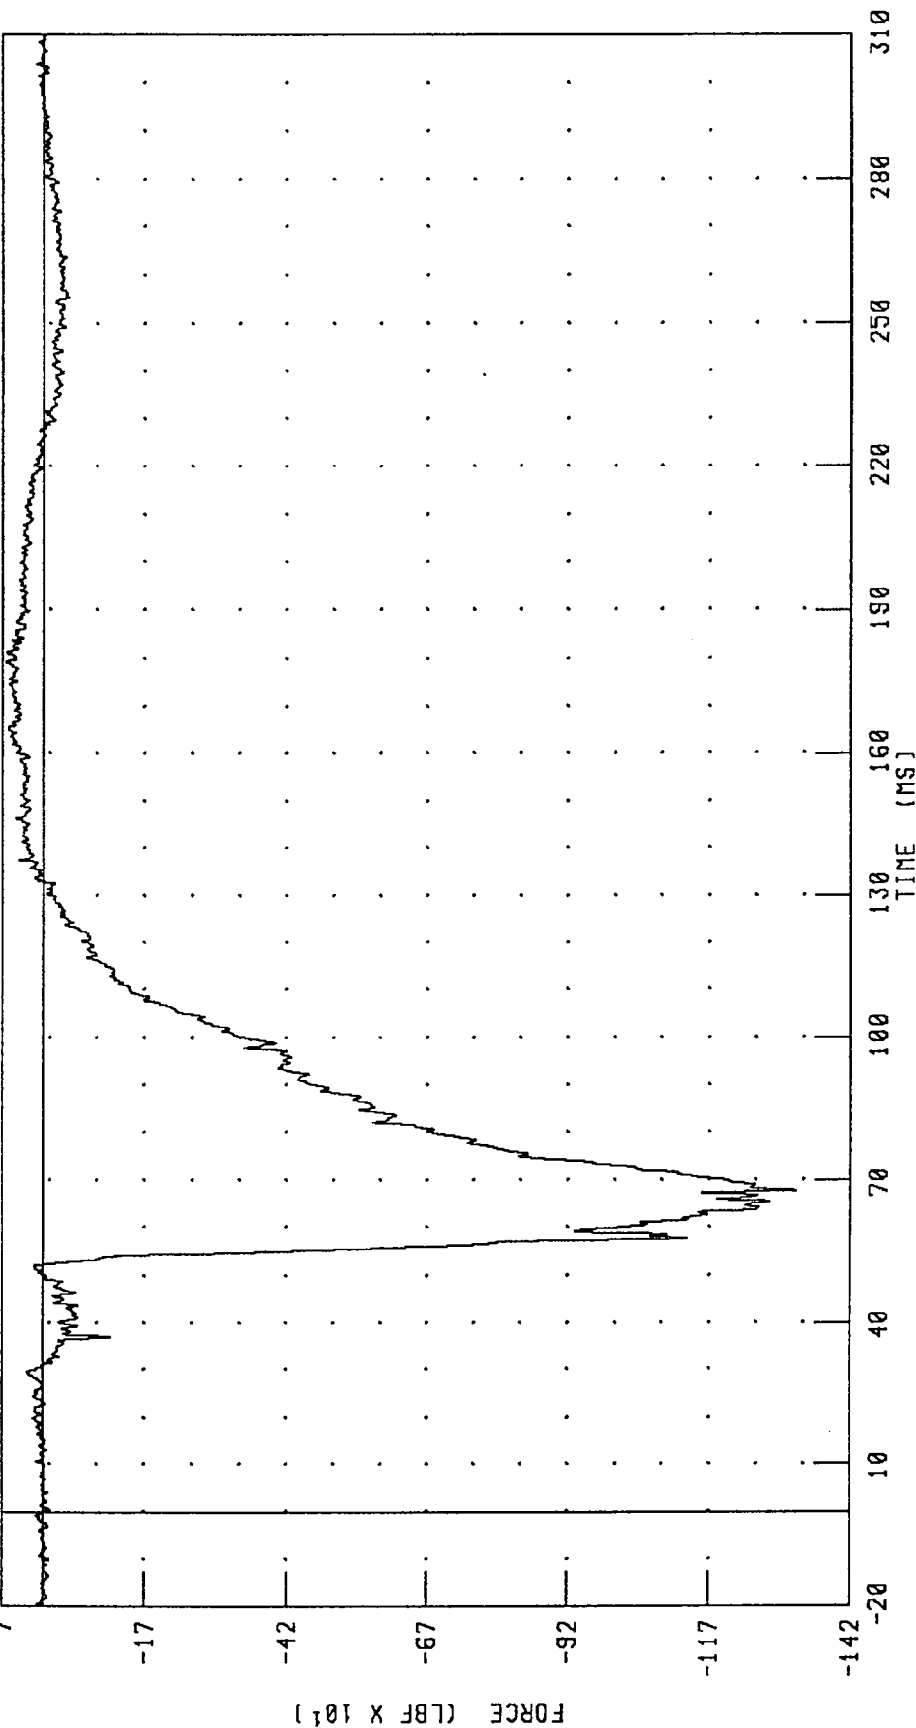

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
 DRIVER RIGHT FEMUR FORCE


208 COMPLIANCE TESTING CS0114 TEST NUMBER: 950201

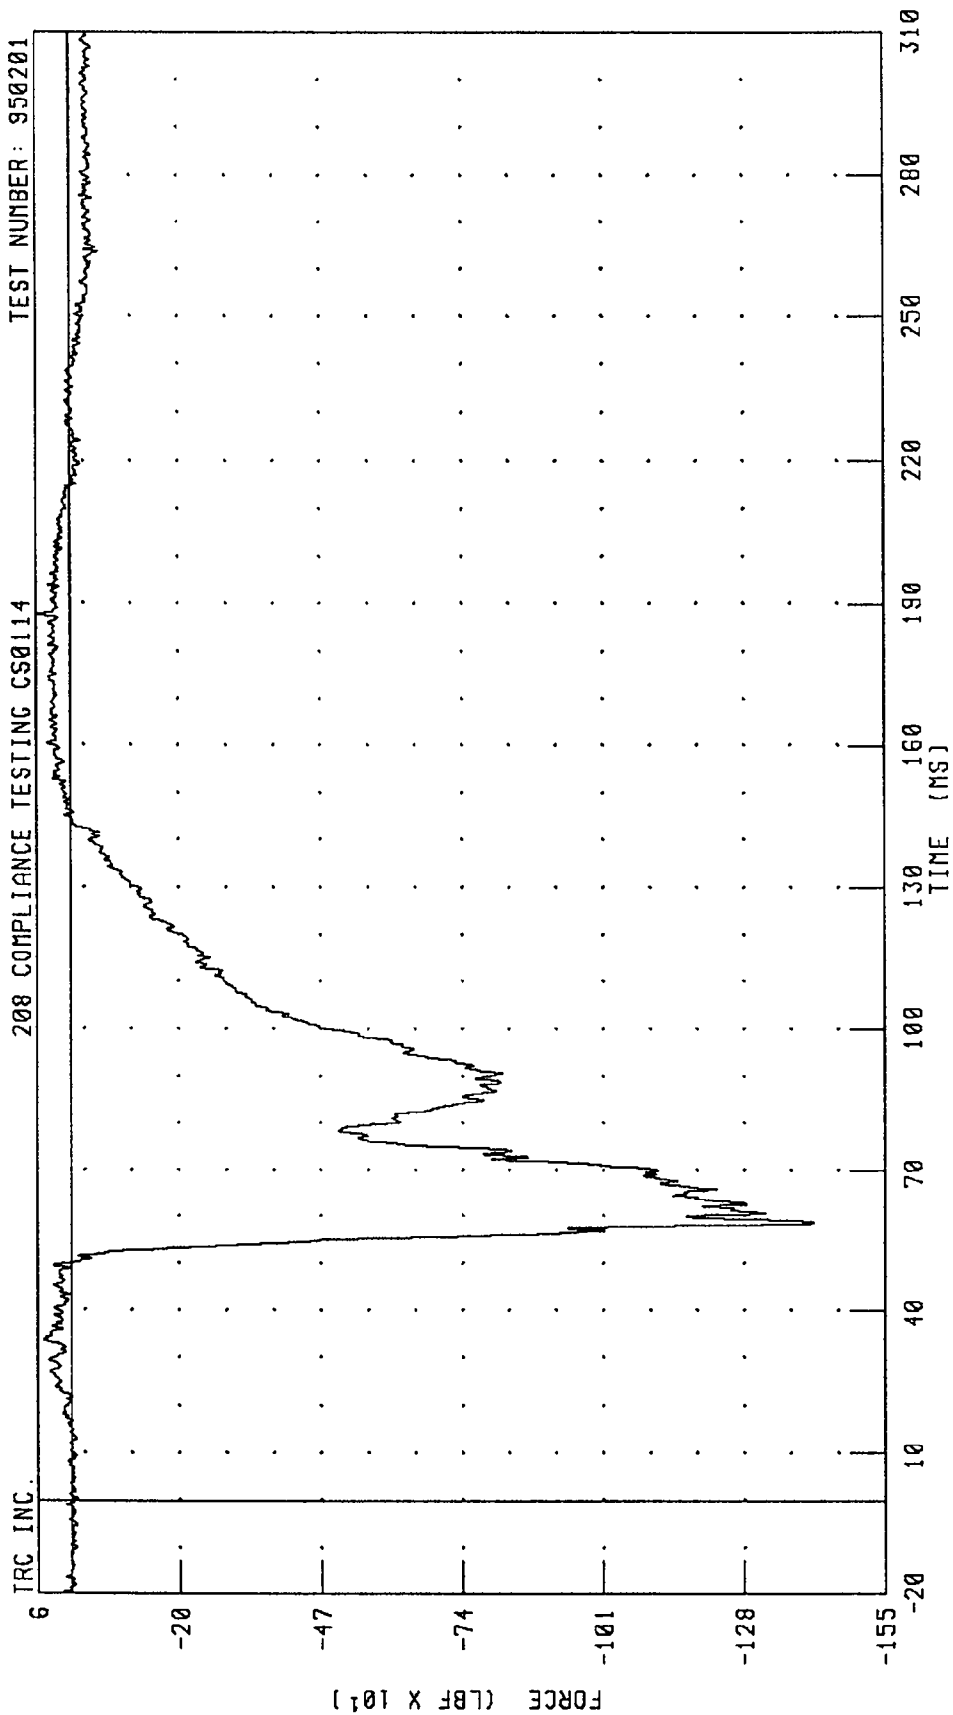

CHANNEL: RFMF1 FILTER: CH. CLASS 600 PEAK DATA: 59.15 LBF @ 187.68 MS; -1419.08 LBF @ 58.56 MS

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
 RIGHT FRONT PASSENGER HEAD X-AXIS ACCELERATION
 208 COMPLIANCE TESTING CS0114

TEST NUMBER: 950201

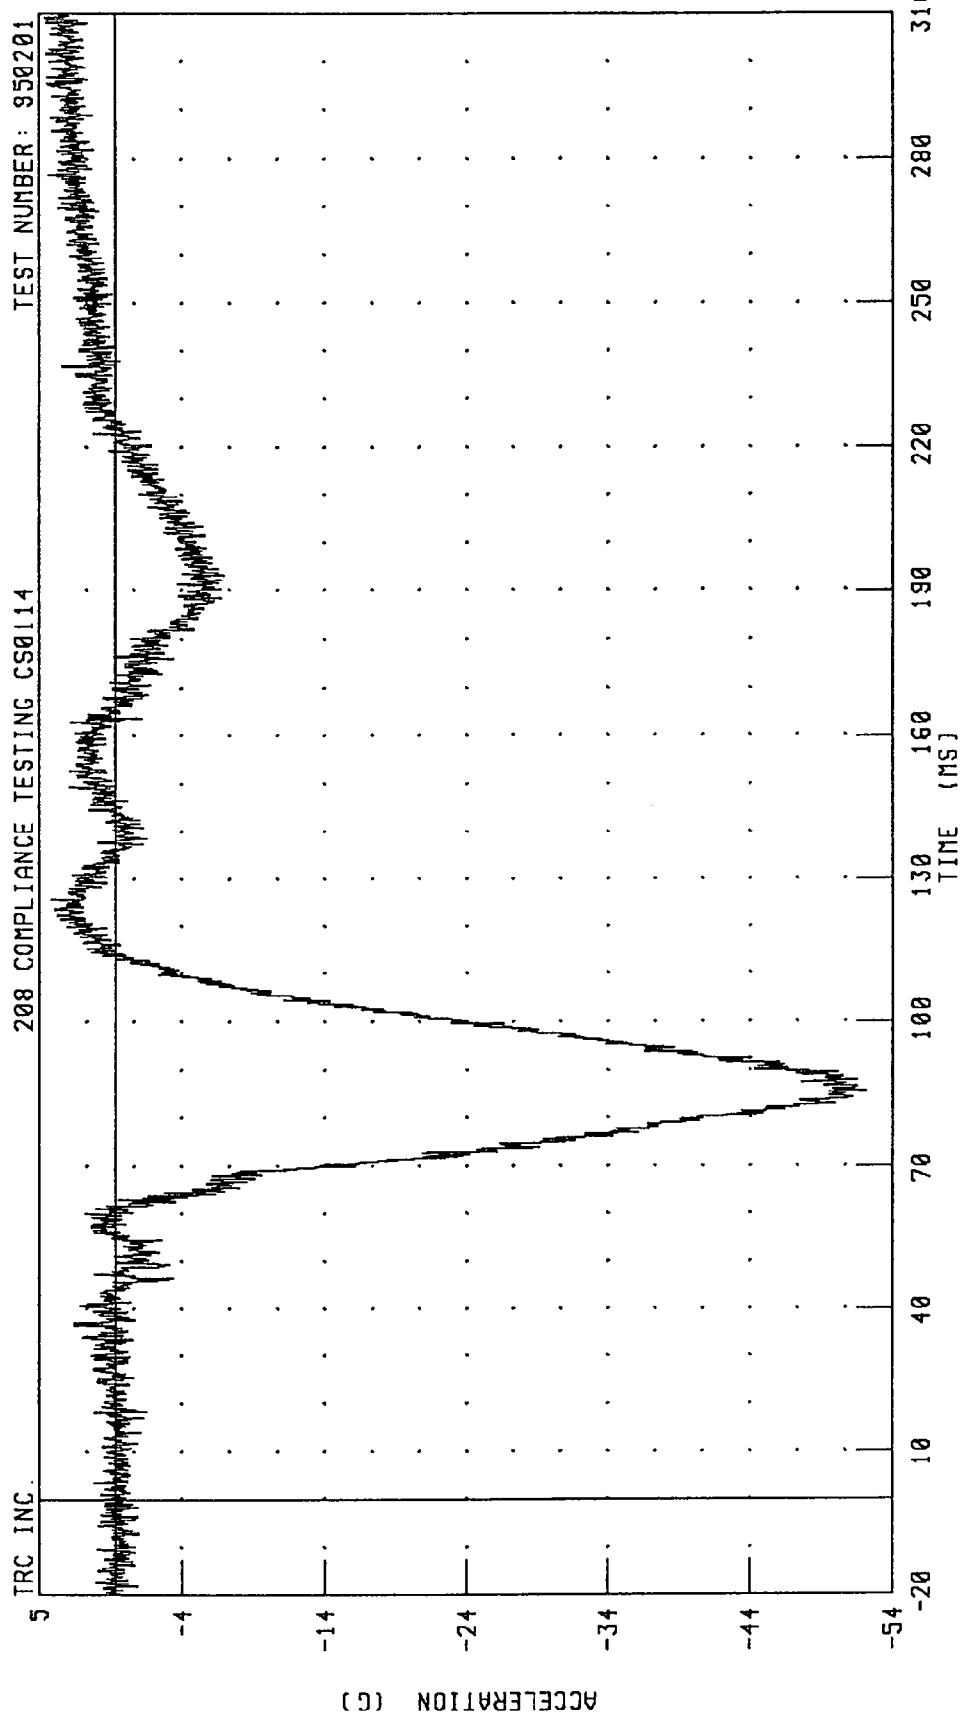

CHANNEL: HEDXC2 FILTER: CH. CLASS 1000


PEAK DATA: 5.00 G @ 309.12 MS; -52.73 G @ 85.52 MS

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
RIGHT FRONT PASSENGER HEAD Y-AXIS ACCELERATION

TEST NUMBER: 950201

208 COMPLIANCE TESTING CS0114

TRC INC.

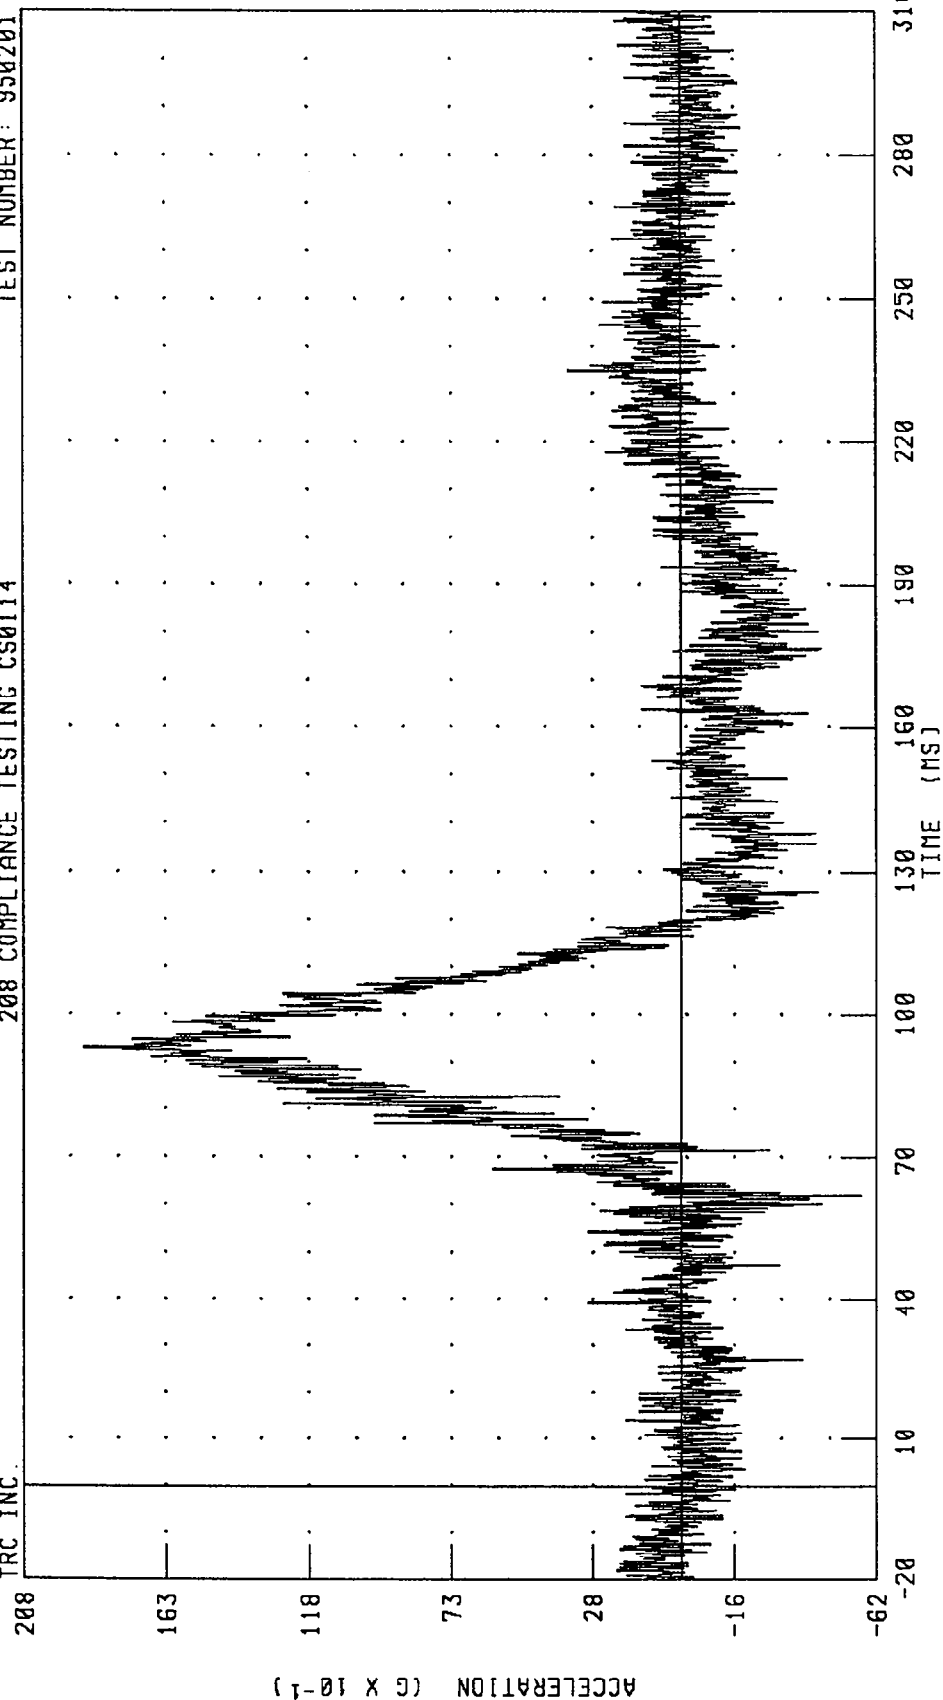

CHANNEL: HEDYG2 FILTER: CH. CLASS 1000


PEAK DATA: 18.90 G @ 92.88 MS; -5.69 G @ 61.92 MS

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
RIGHT FRONT PASSENGER HEAD Z-AXIS ACCELERATION

TEST NUMBER: 950201

208 COMPLIANCE TESTING CS0114

IRC INC.

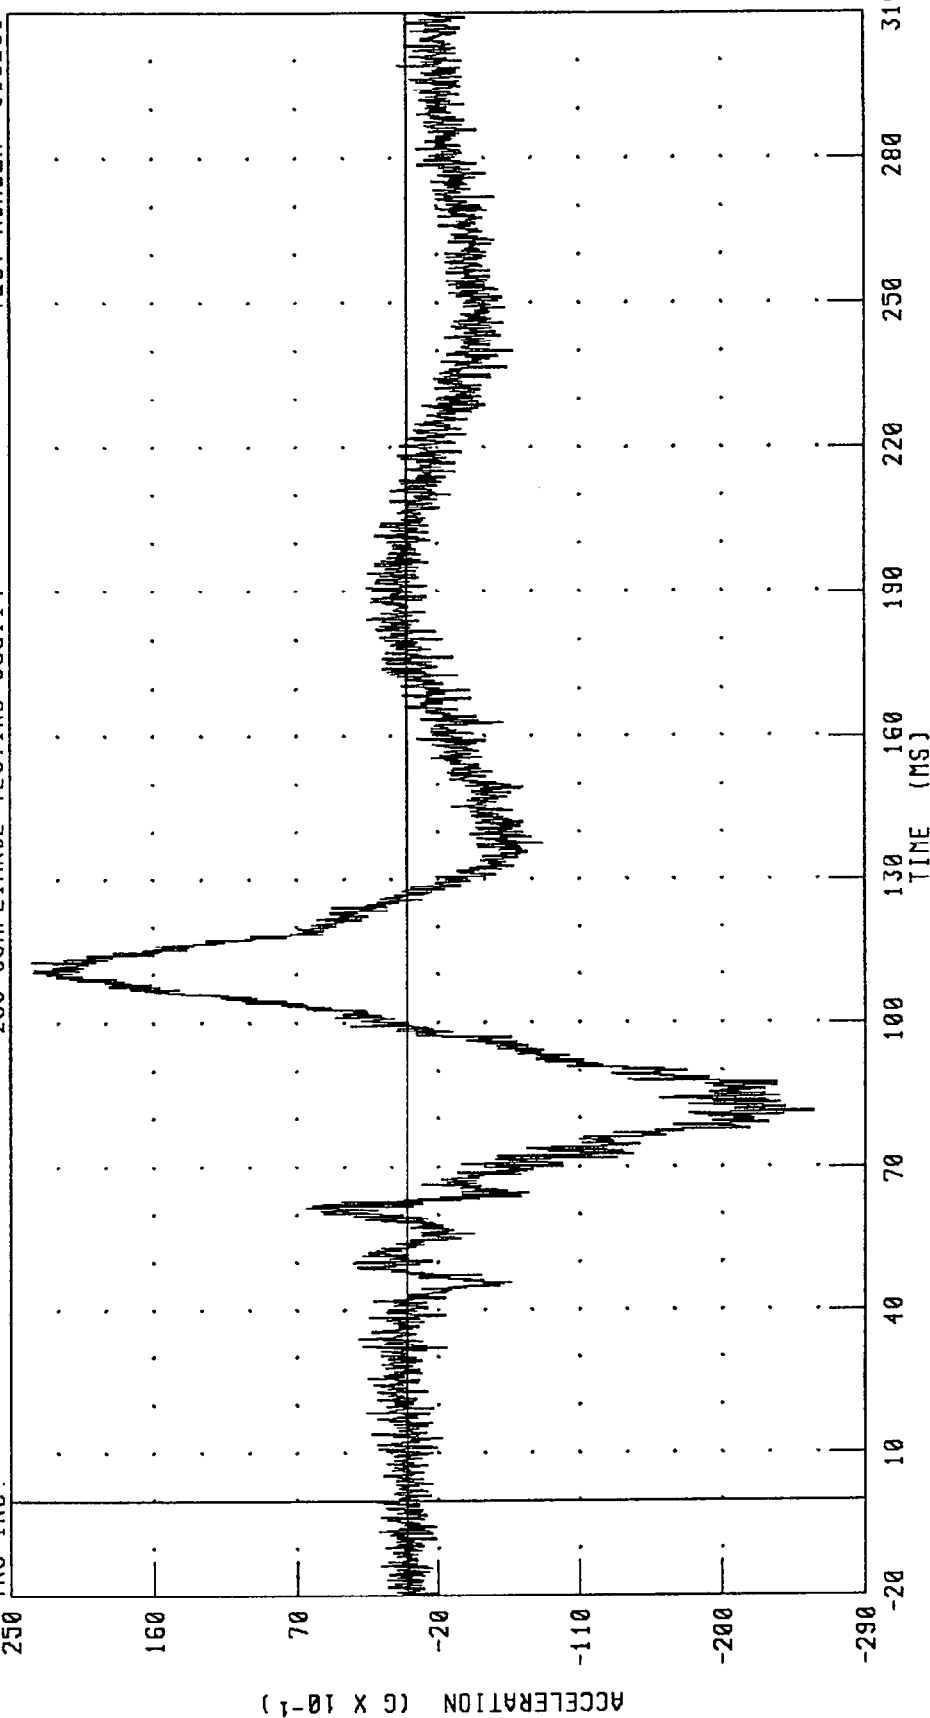


CHANNEL: HEDZG2 FILTER: CH. CLASS 1000

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
RIGHT FRONT PASSENGER HEAD RESULTANT ACCELERATION

TEST NUMBER: 950201

208 COMPLIANCE TESTING CS0114


TRC INC.

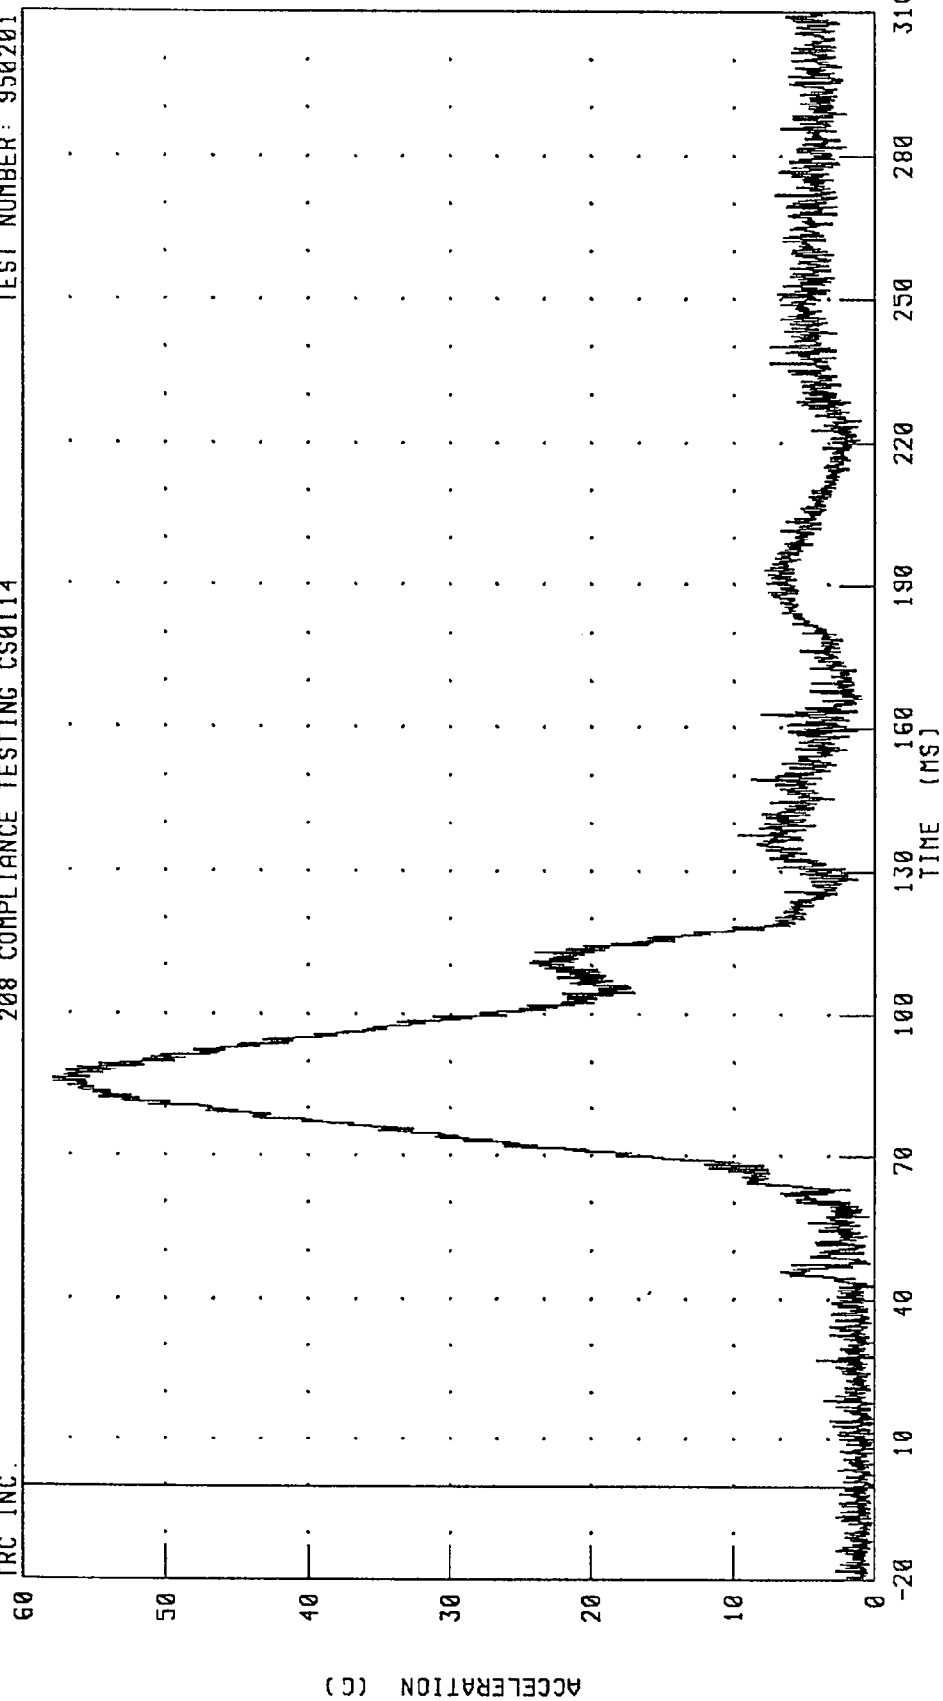

CHANNEL: HEDRG2 FILTER: CH. CLASS 1000

PEAK DATA: 57.88 G @ 86.32 MS; 0.02 G @ 2.48 MS

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
 RIGHT FRONT PASSENGER CHEST X-AXIS ACCELERATION
 208 COMPLIANCE TESTING CS0114

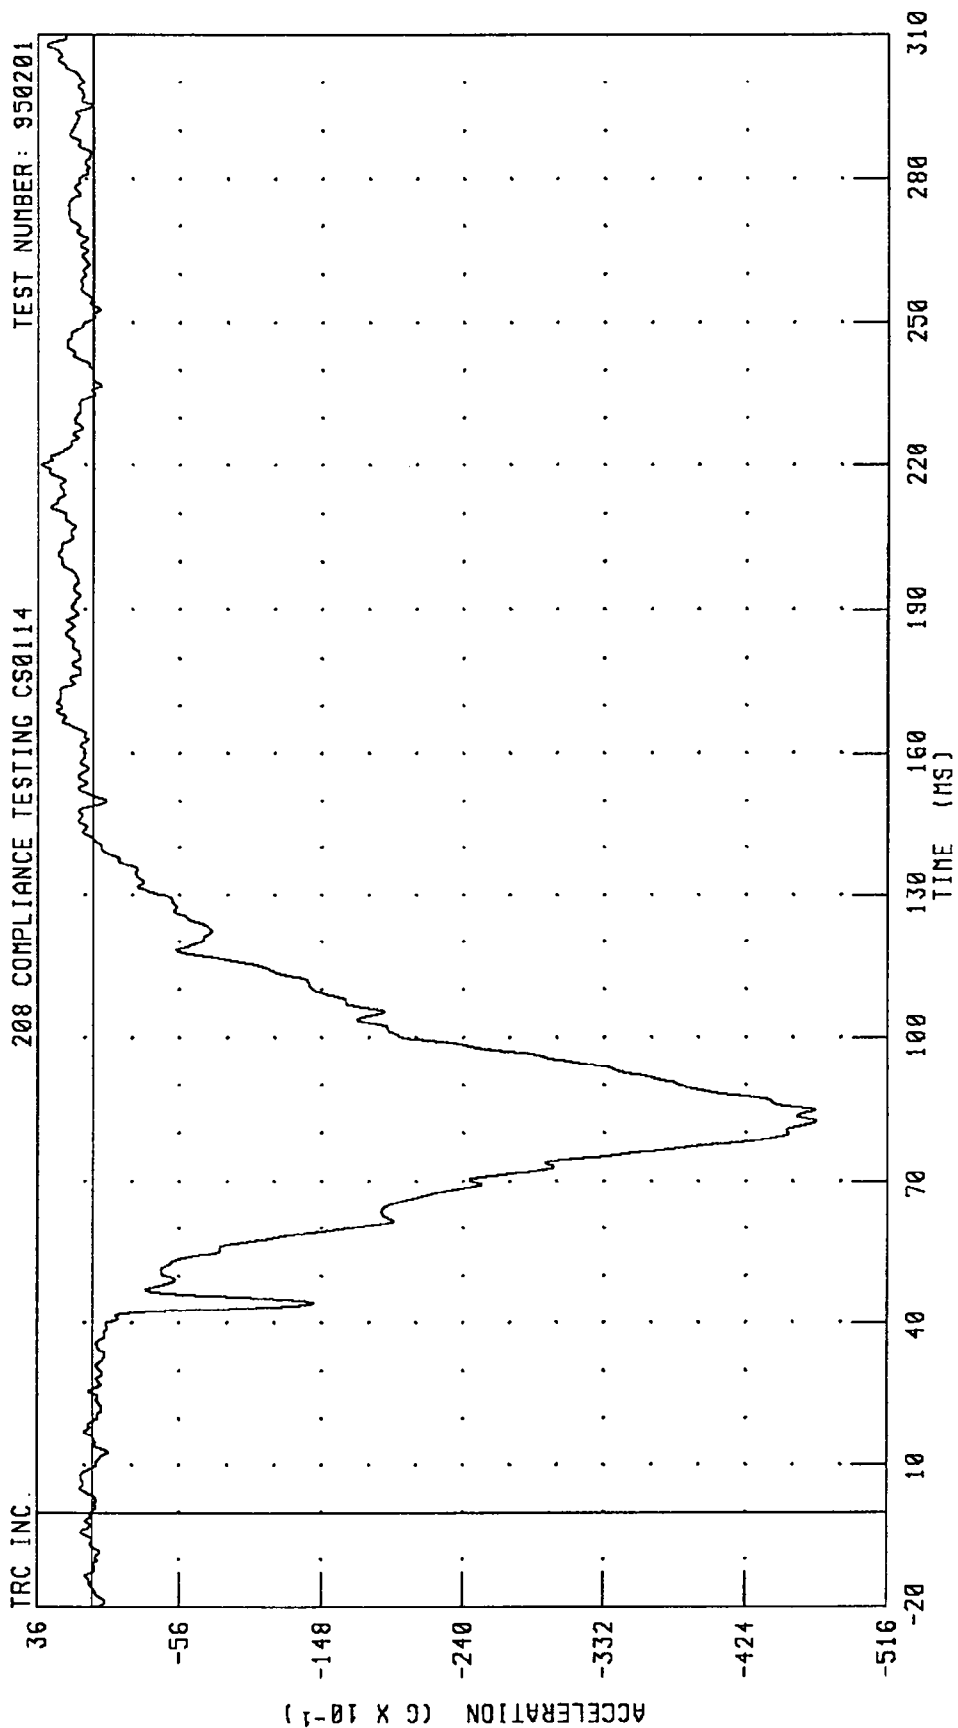


CHANNEL: CSTXG2 FILTER: CH. CLASS 180 PEAK DATA: 3.33 G @ 220.16 MS; -46.98 G @ 82.48 MS

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
RIGHT FRONT PASSENGER CHEST Y-AXIS ACCELERATION

TEST NUMBER: 950201

208 COMPLIANCE TESTING CS0114

TRC INC.

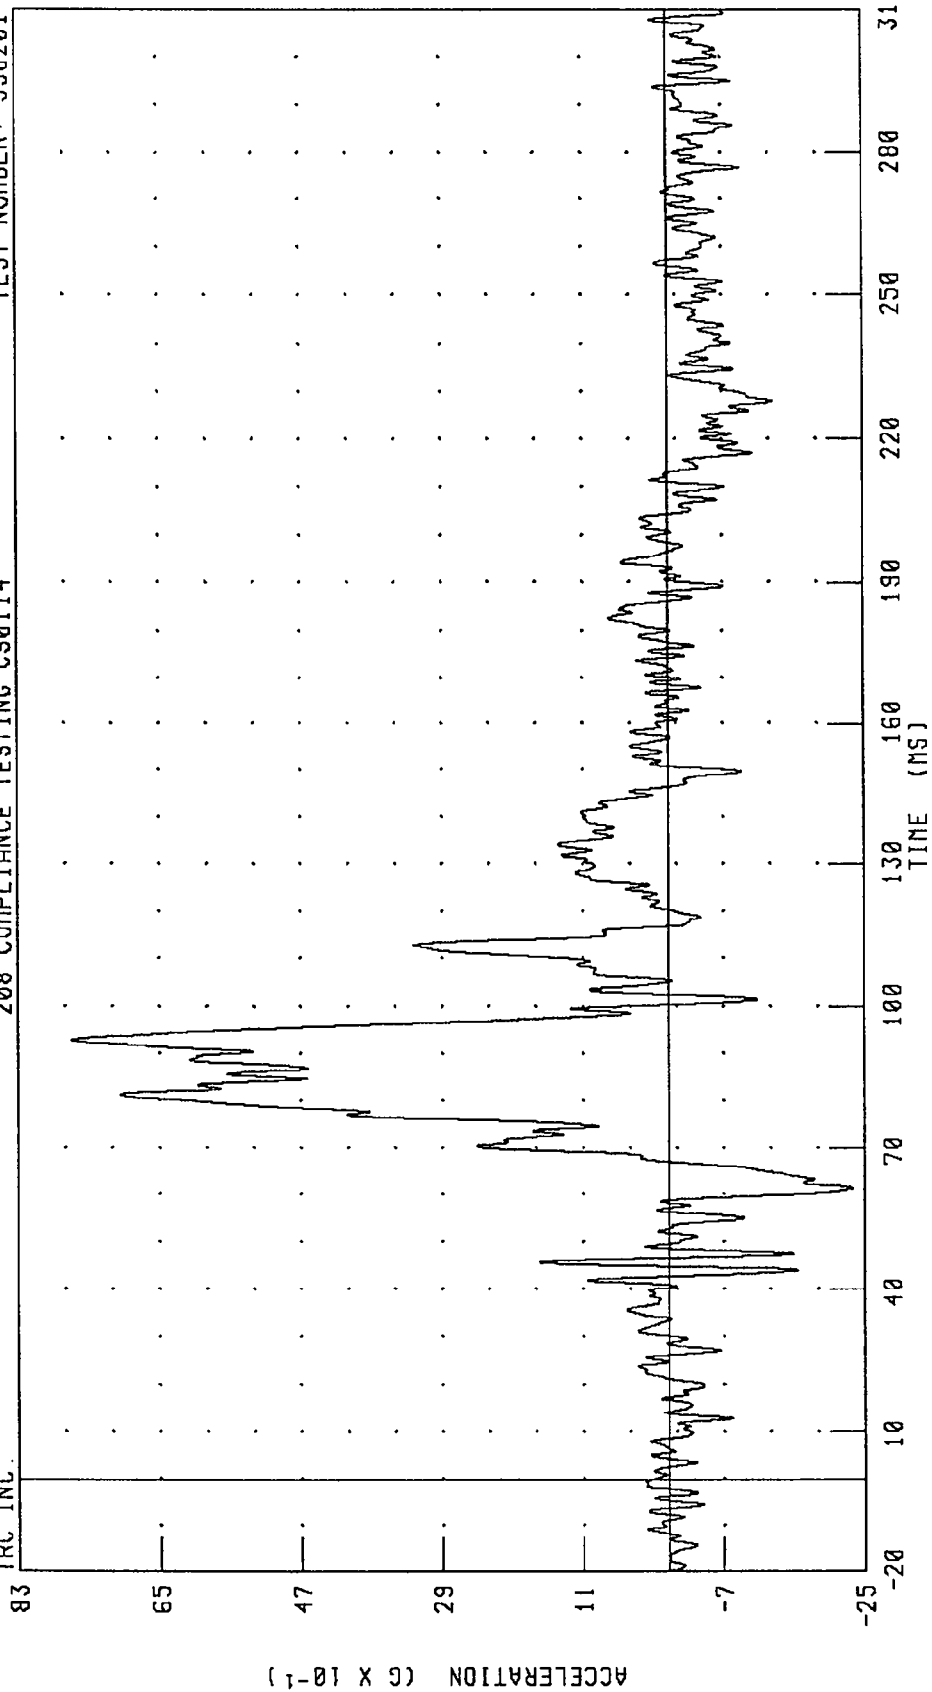


PEAK DATA: 7.62 G @ 92.88 MS; -2.35 G @ 61.28 MS

CHANNEL: CSTYG2 FILTER: CH. CLASS 180

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
RIGHT FRONT PASSENGER CHEST Z-AXIS ACCELERATION
208 COMPLIANCE TESTING CS0114

TEST NUMBER: 950201

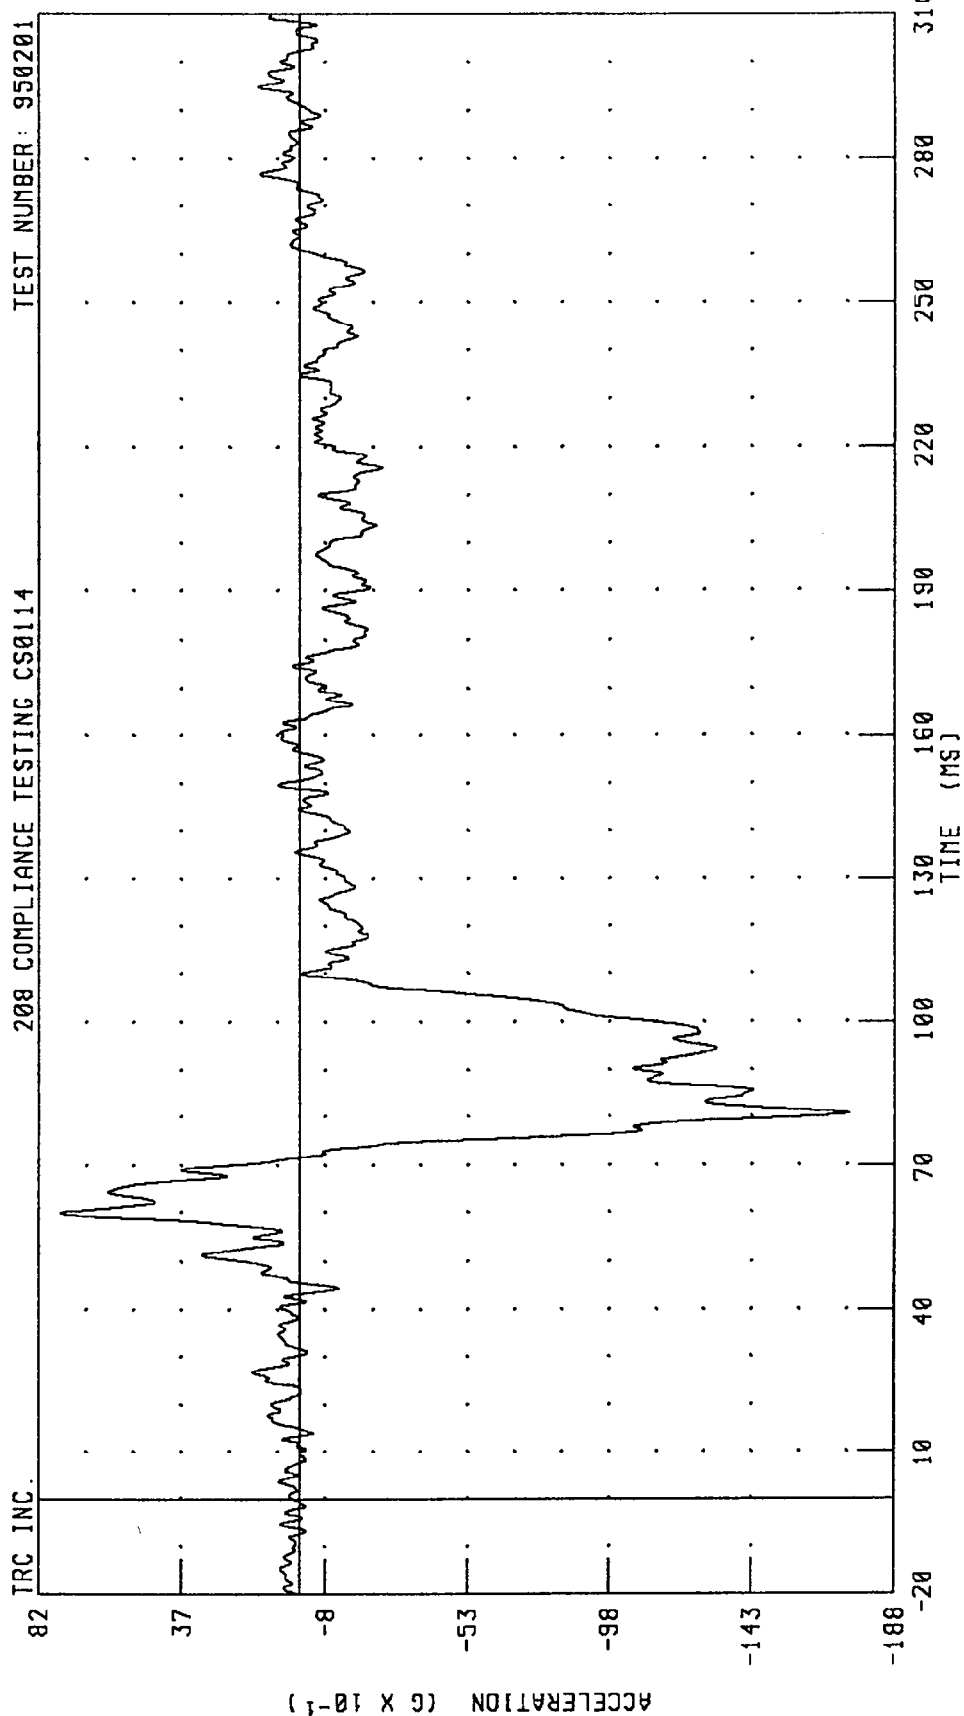

CHANNEL: CSTZG2 FILTER: CH. CLASS 180


PEAK DATA: 7.51 G @ 59.92 MS; -17.36 G @ 80.64 MS

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
RIGHT FRONT PASSENGER CHEST RESULTANT ACCELERATION

TEST NUMBER: 950201

208 COMPLIANCE TESTING CS0114


TRC INC.

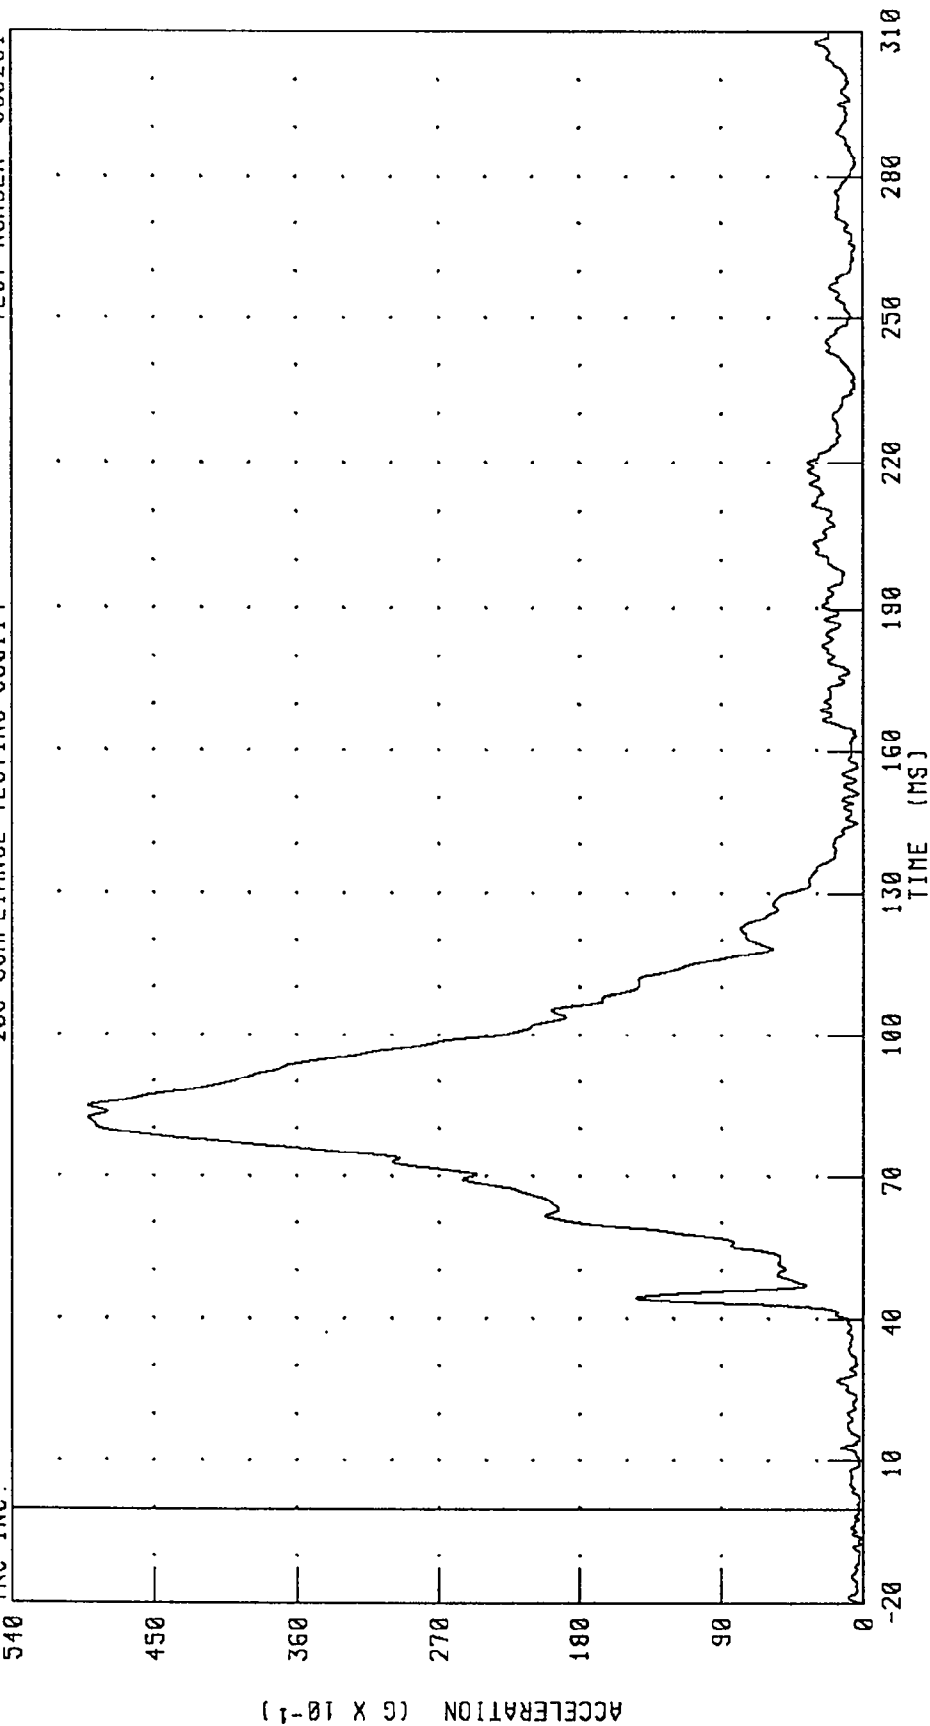

CHANNEL: CSTRG2 FILTER: CH. CLASS 180

PEAK DATA: 49.18 G @ 84.88 MS, 0.05 G @ -20.00 MS

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
 RIGHT FRONT PASSENGER CHEST DEFLECTION
 208 COMPLIANCE TESTING CS0114

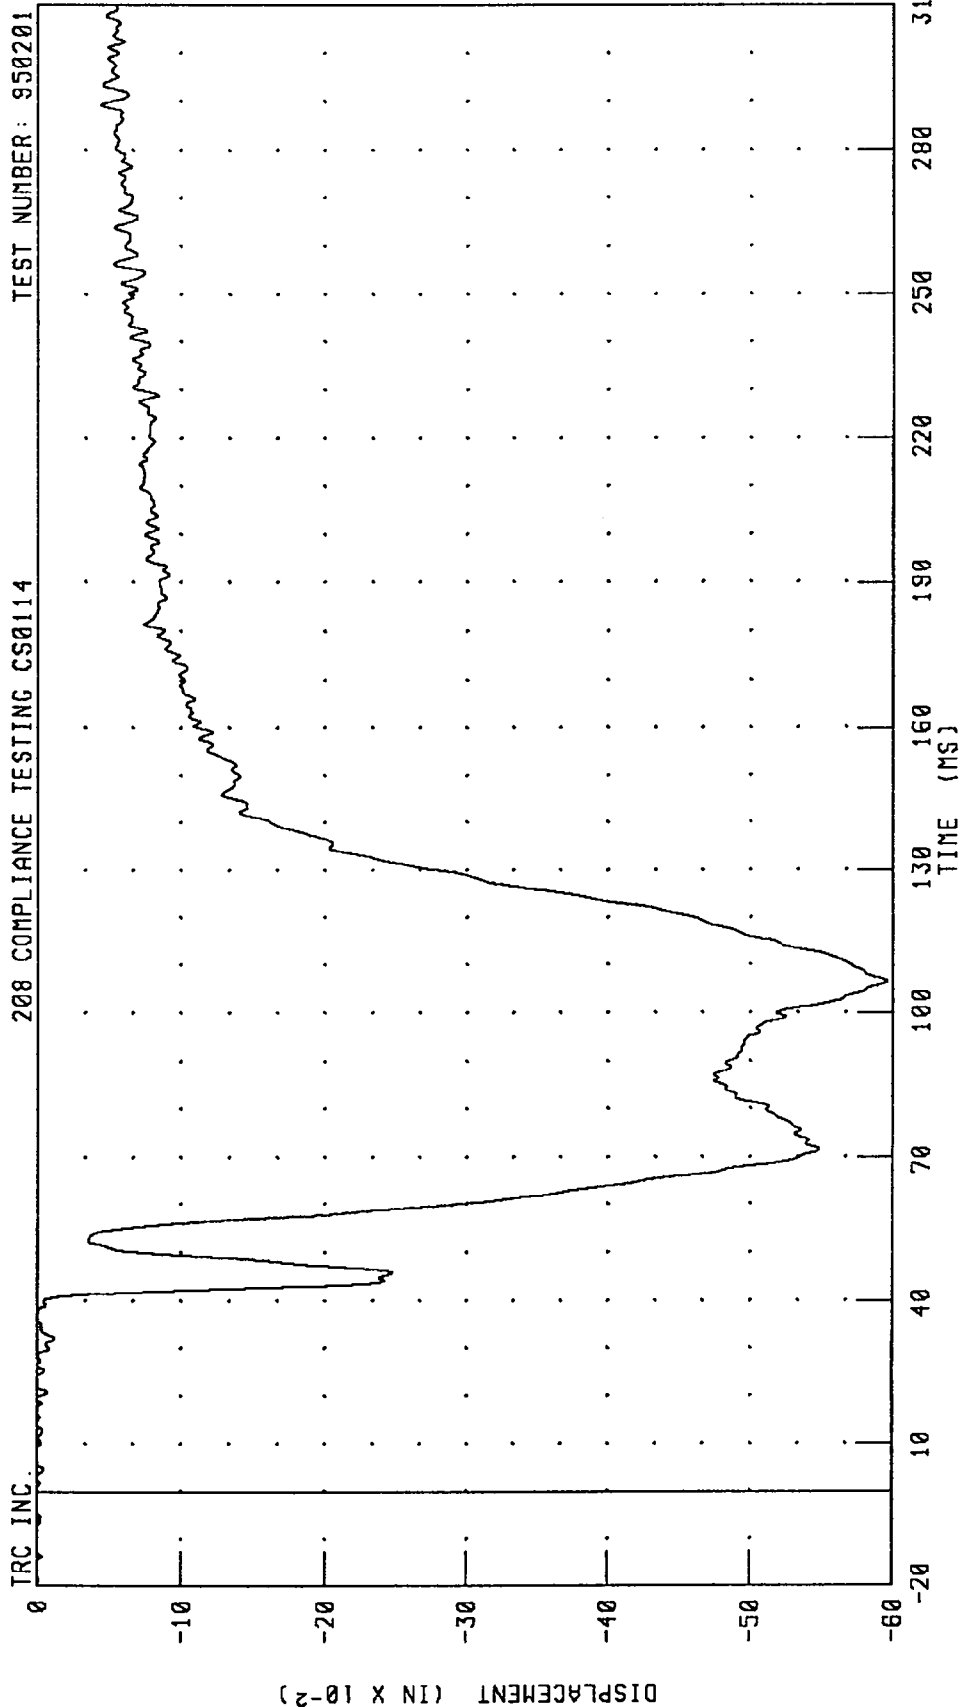


CHANNEL: CSTXD2 FILTER: CH. CLASS 180

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
RIGHT FRONT PASSENGER LEFT FEMUR FORCE

TEST NUMBER: 950201

208 COMPLIANCE TESTING CS0114


TRC INC.

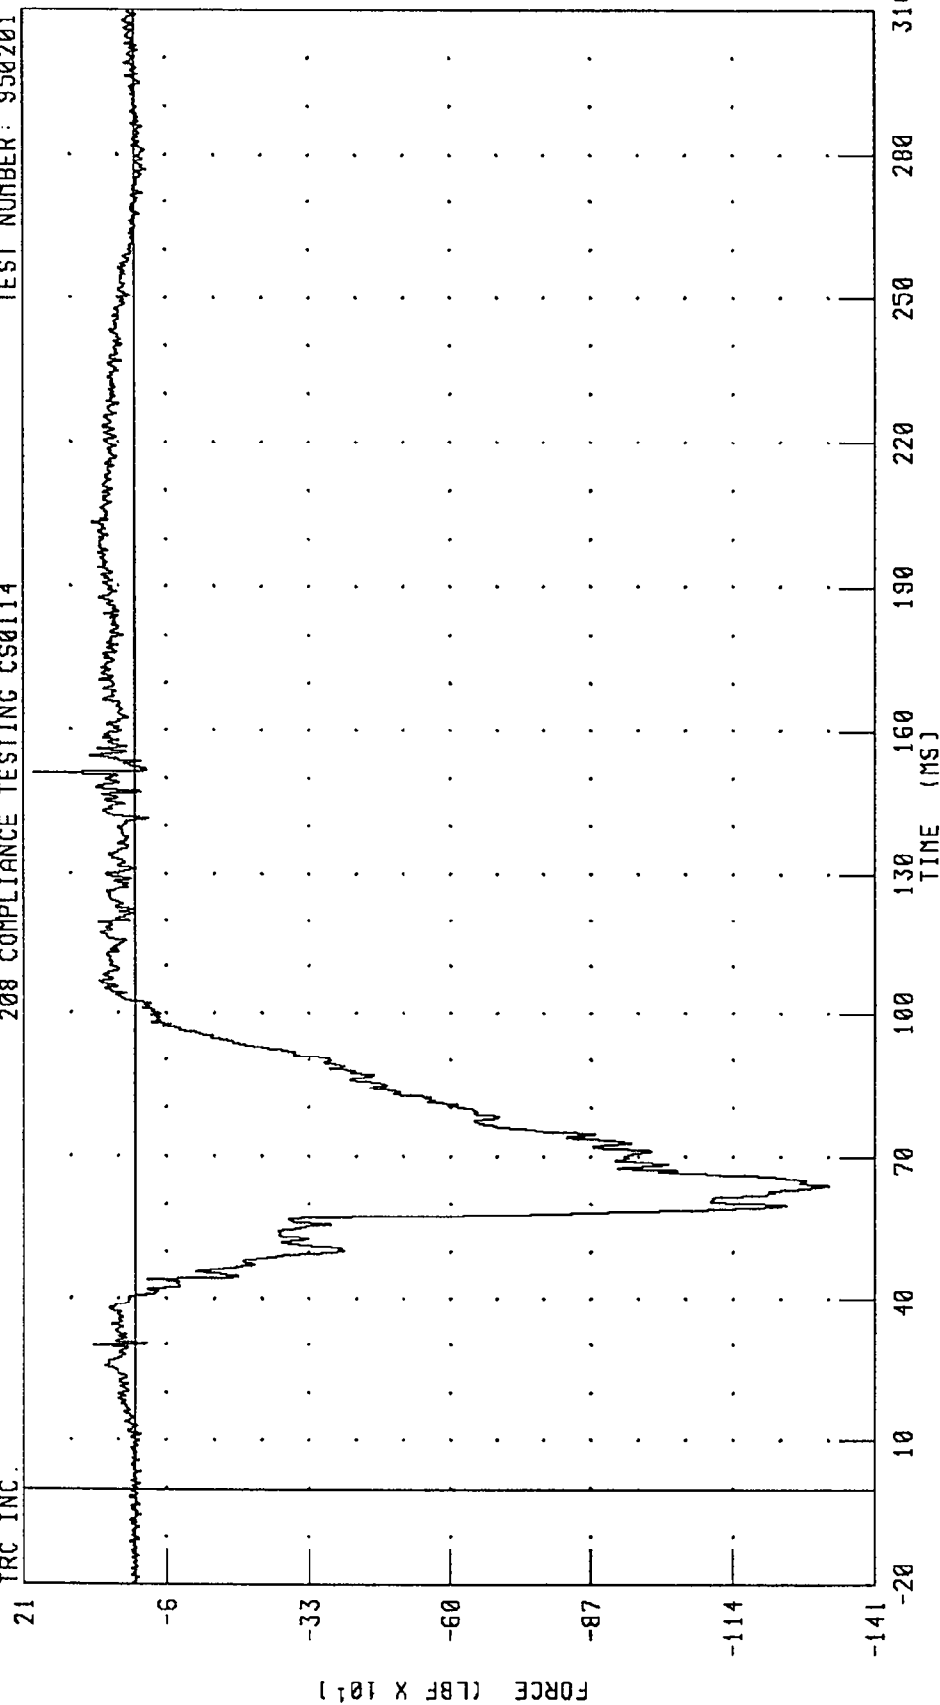

CHANNEL: LFMF2 FILTER: CH. CLASS 600

PEAK DATA: 191.81 LBF @ 151.12 MS; -1322.49 LBF @ 63.92 MS

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
 RIGHT FRONT PASSENGER RIGHT FEMUR FORCE
 208 COMPLIANCE TESTING CS0114

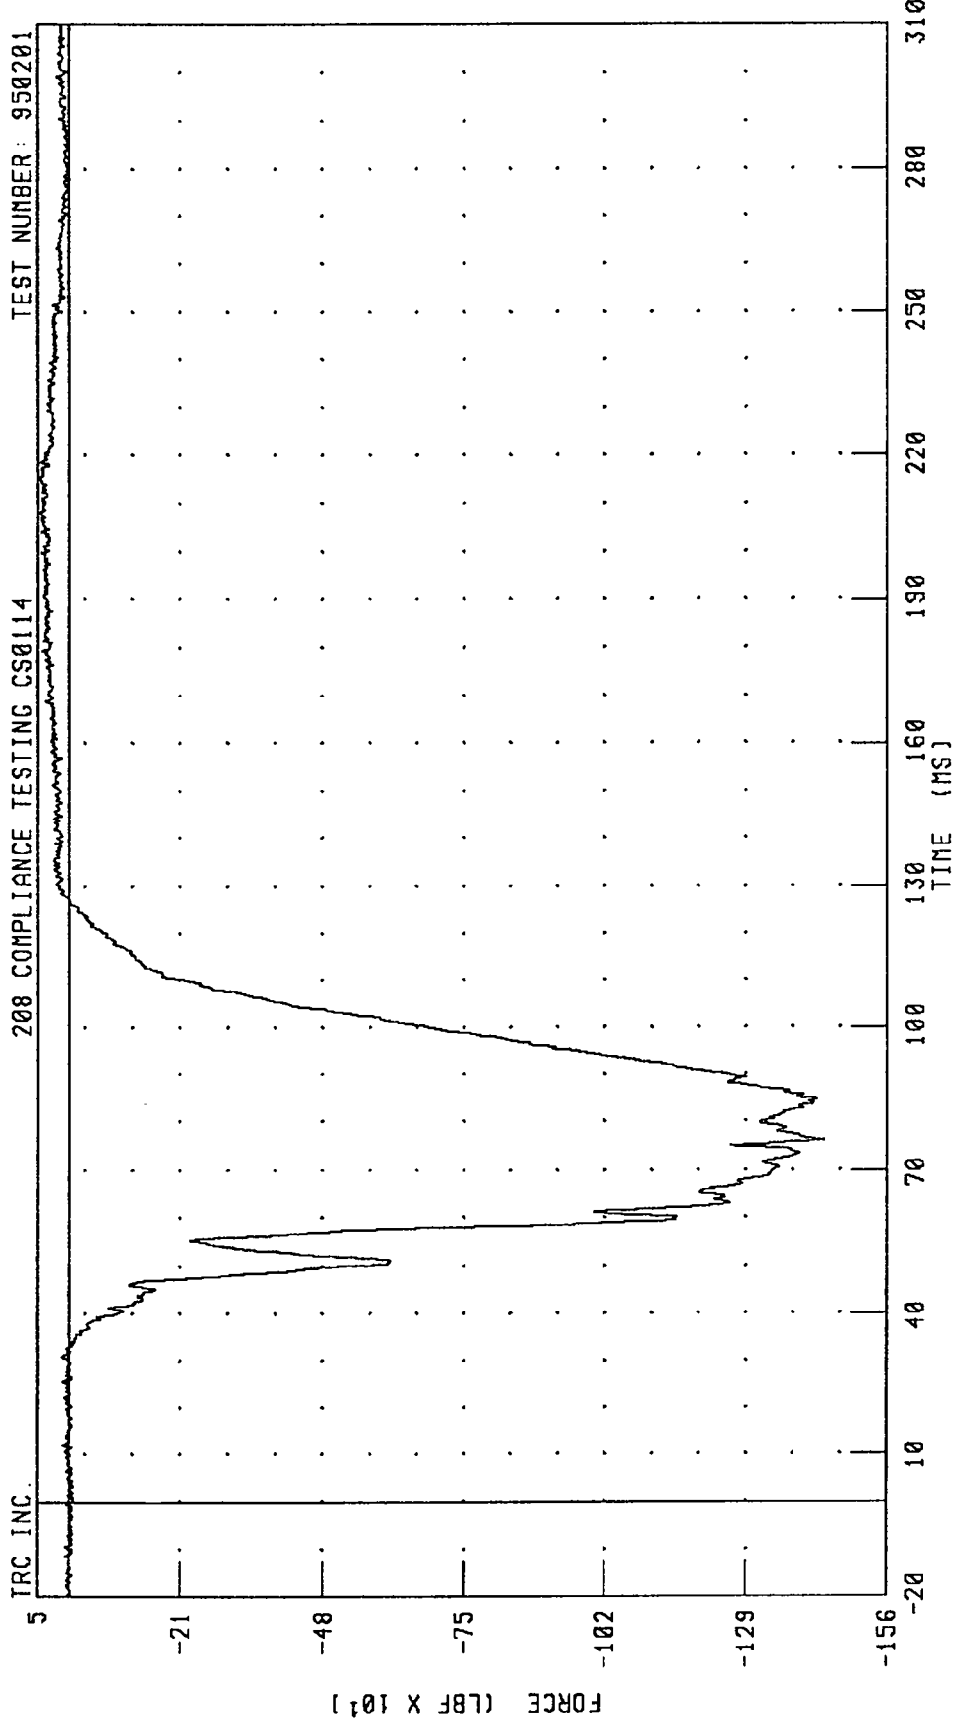


1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
LEFT REAR SEAT X-AXIS ACCELERATION

TEST NUMBER: 950201

208 COMPLIANCE TESTING CS0114

TRC INC.

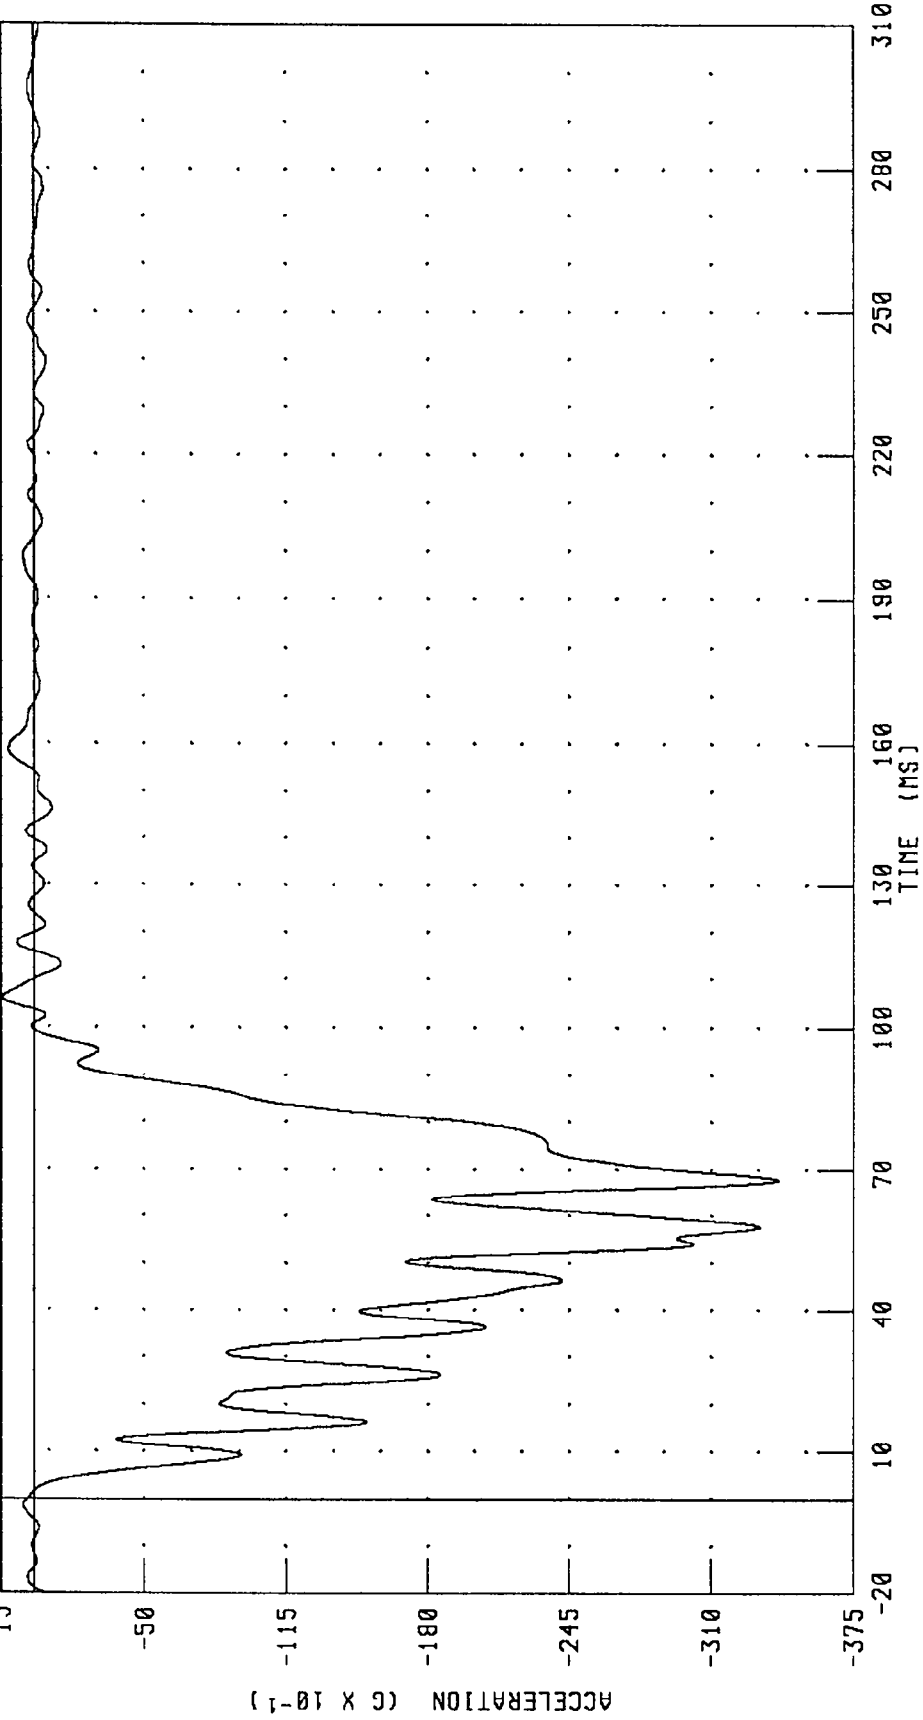


CHANNEL: TLRXG1 FILTER: CH. CLASS 60

PEAK DATA: 1.43 G @ 105.92 MS, -34.09 G @ 67.84 MS

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
 RIGHT REAR SEAT X-AXIS ACCELERATION
 208 COMPLIANCE TESTING CS0114

TEST NUMBER: 950201

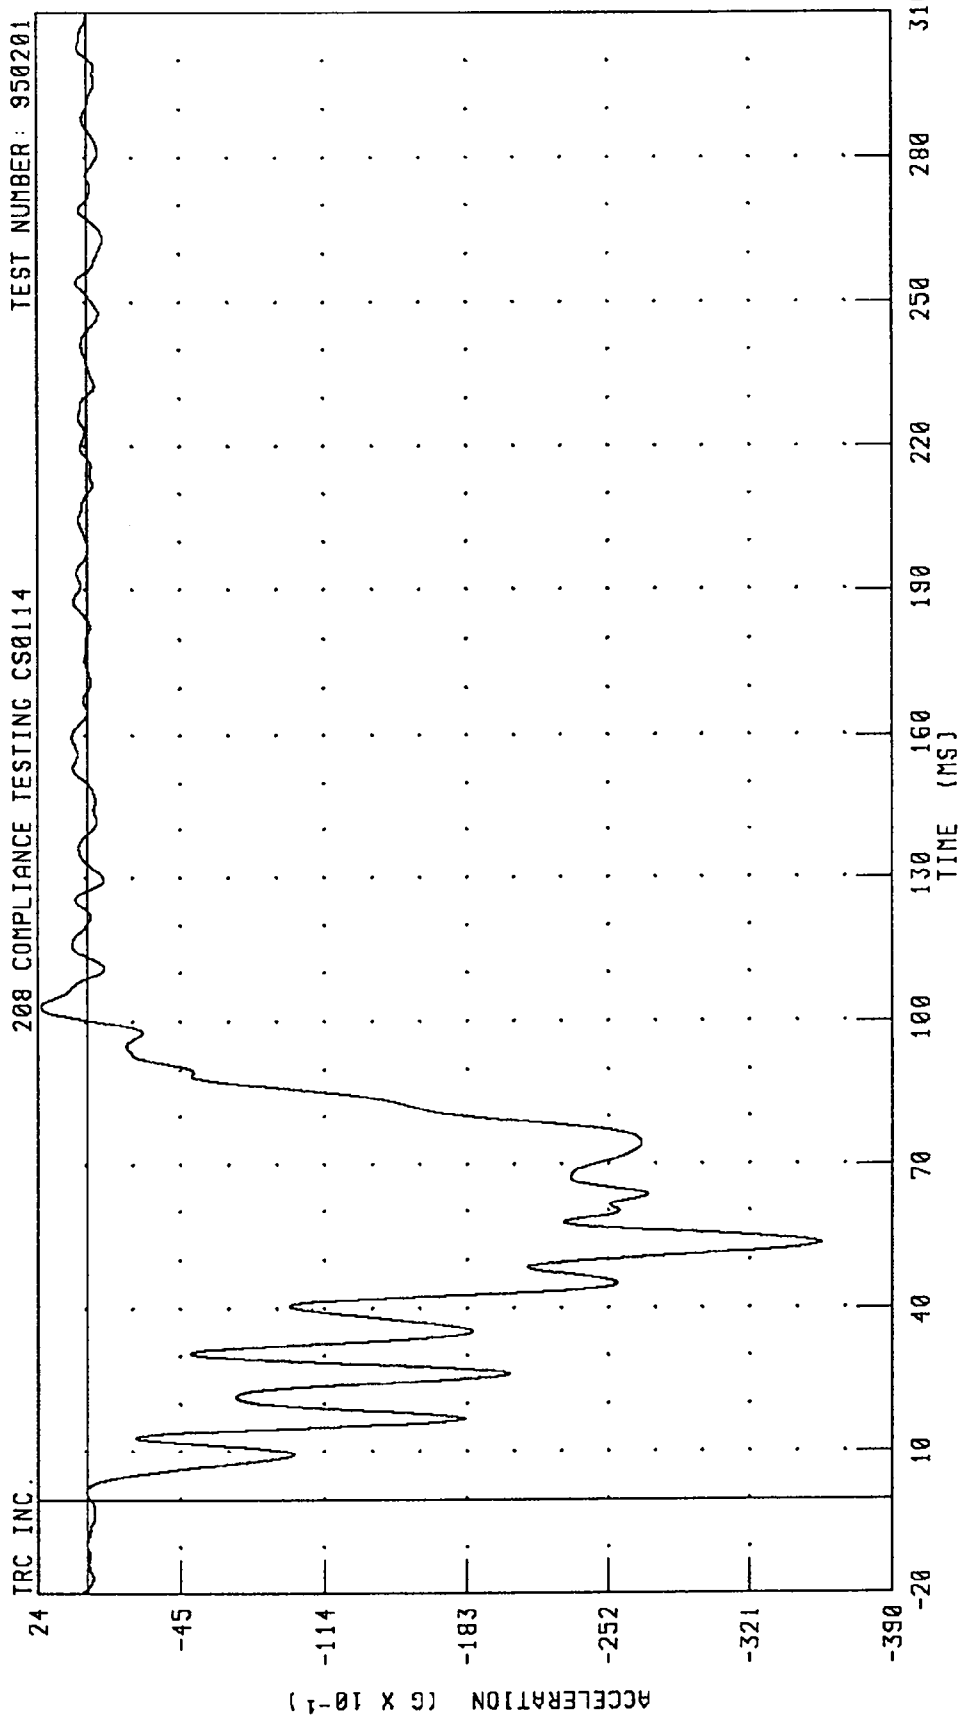


CHANNEL: TRRXG1 FILTER: CH. CLASS 60

PEAK DATA: 2.21 G @ 103.12 MS; -35.59 G @ 53.36 MS

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
 ENGINE UPPER BLOCK X-AXIS ACCELERATION
 208 COMPLIANCE TESTING CS0114

TEST NUMBER: 950201

TRC INC.

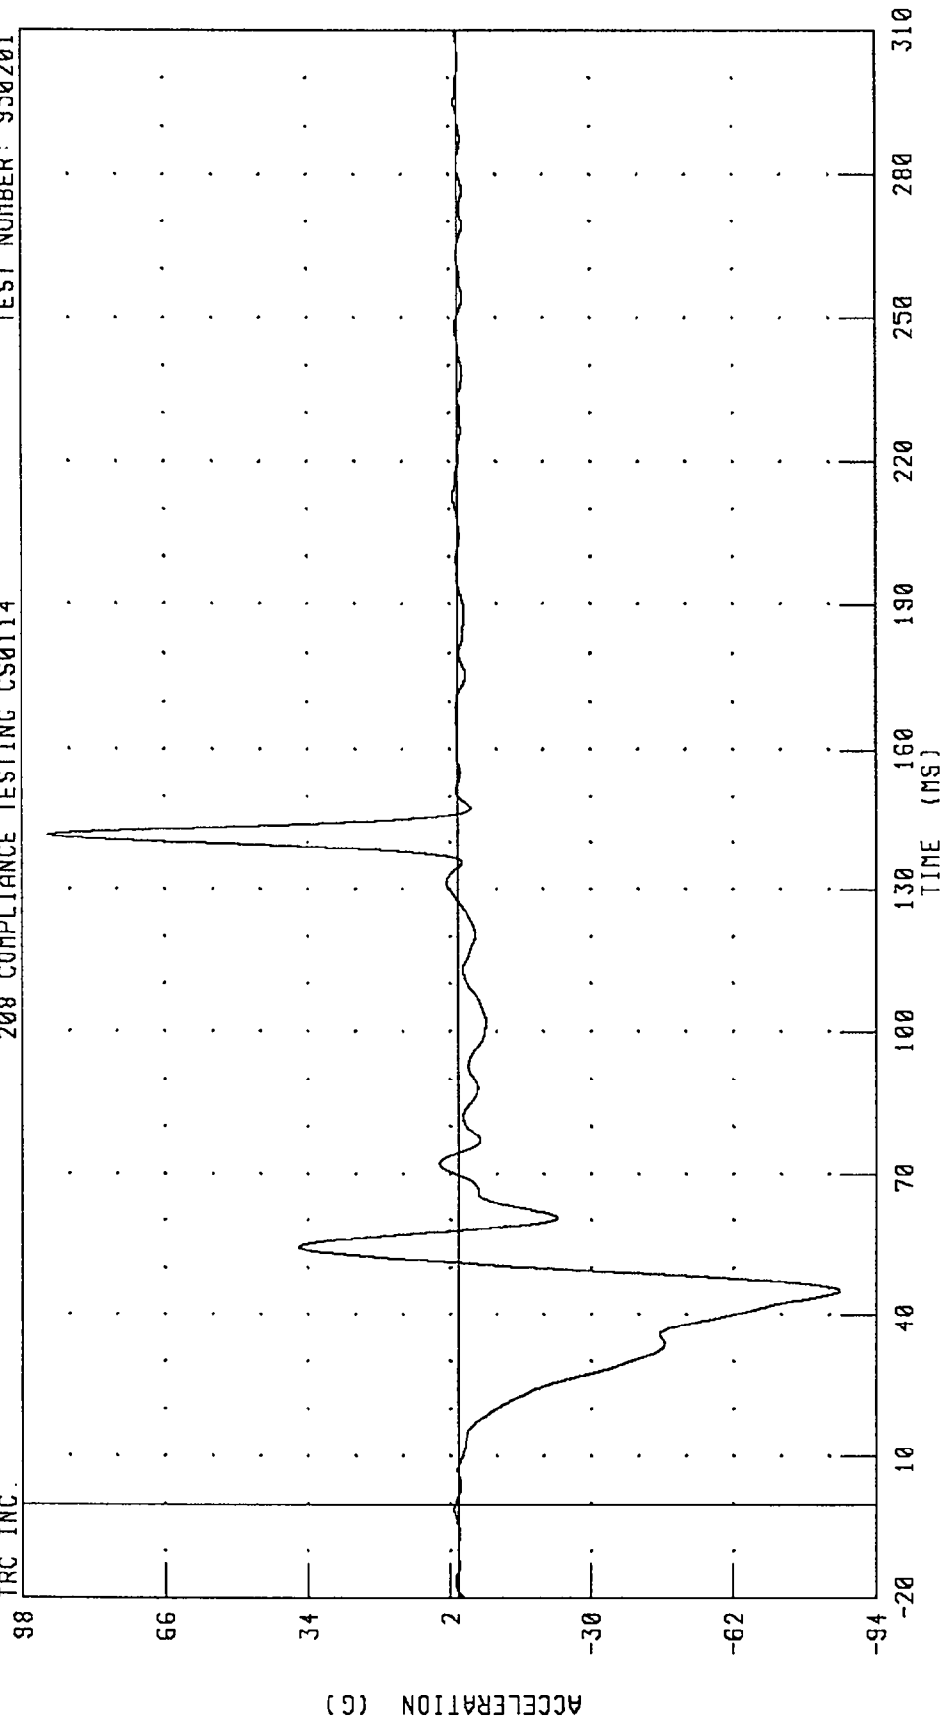


PEAK DATA: 92.18 G @ 141.68 MS; -85.79 G @ 45.12 MS

CHANNEL: ENGXC1 FILTER: CH. CLASS 60

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
ENGINE BOTTOM BLOCK X-AXIS ACCELERATION

208 COMPLIANCE TESTING CS0114 TEST NUMBER: 950201

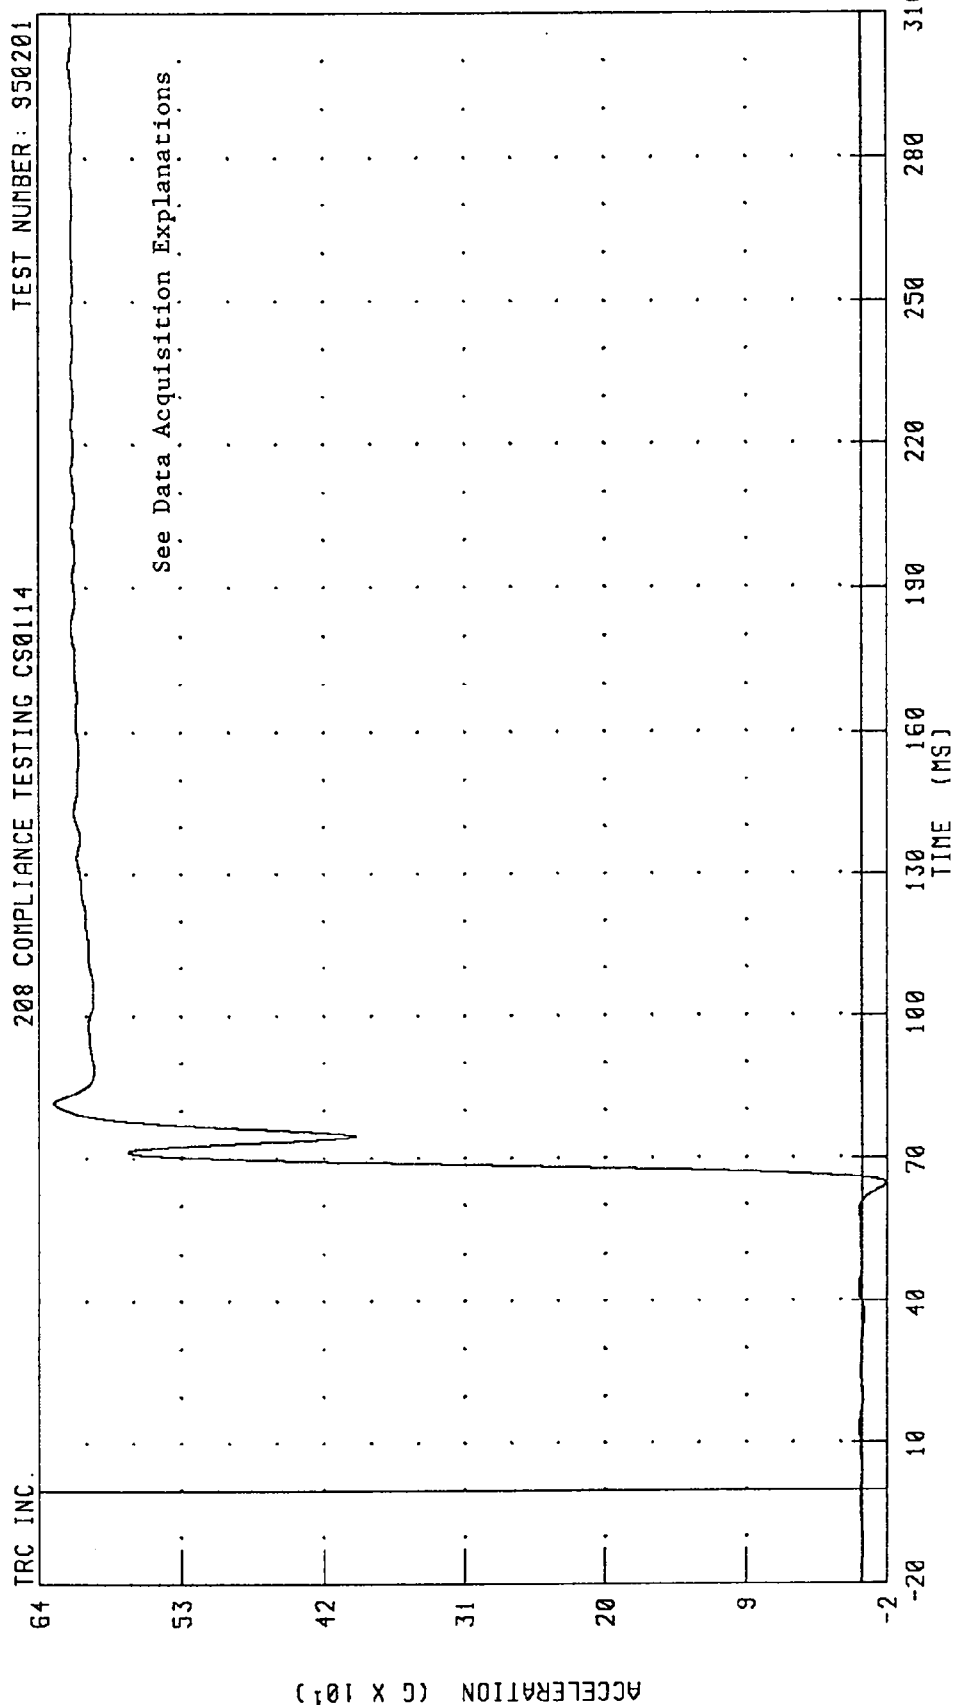

CHANNEL: ENGXC2 FILTER: CH. CLASS 60


PEAK DATA: 628.32 G @ 81.76 MS; -18.85 G @ 64.40 MS

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
RIGHT BRAKE CALIPER X-AXIS ACCELERATION

TEST NUMBER: 950201

208 COMPLIANCE TESTING CS0114

TRC INC.

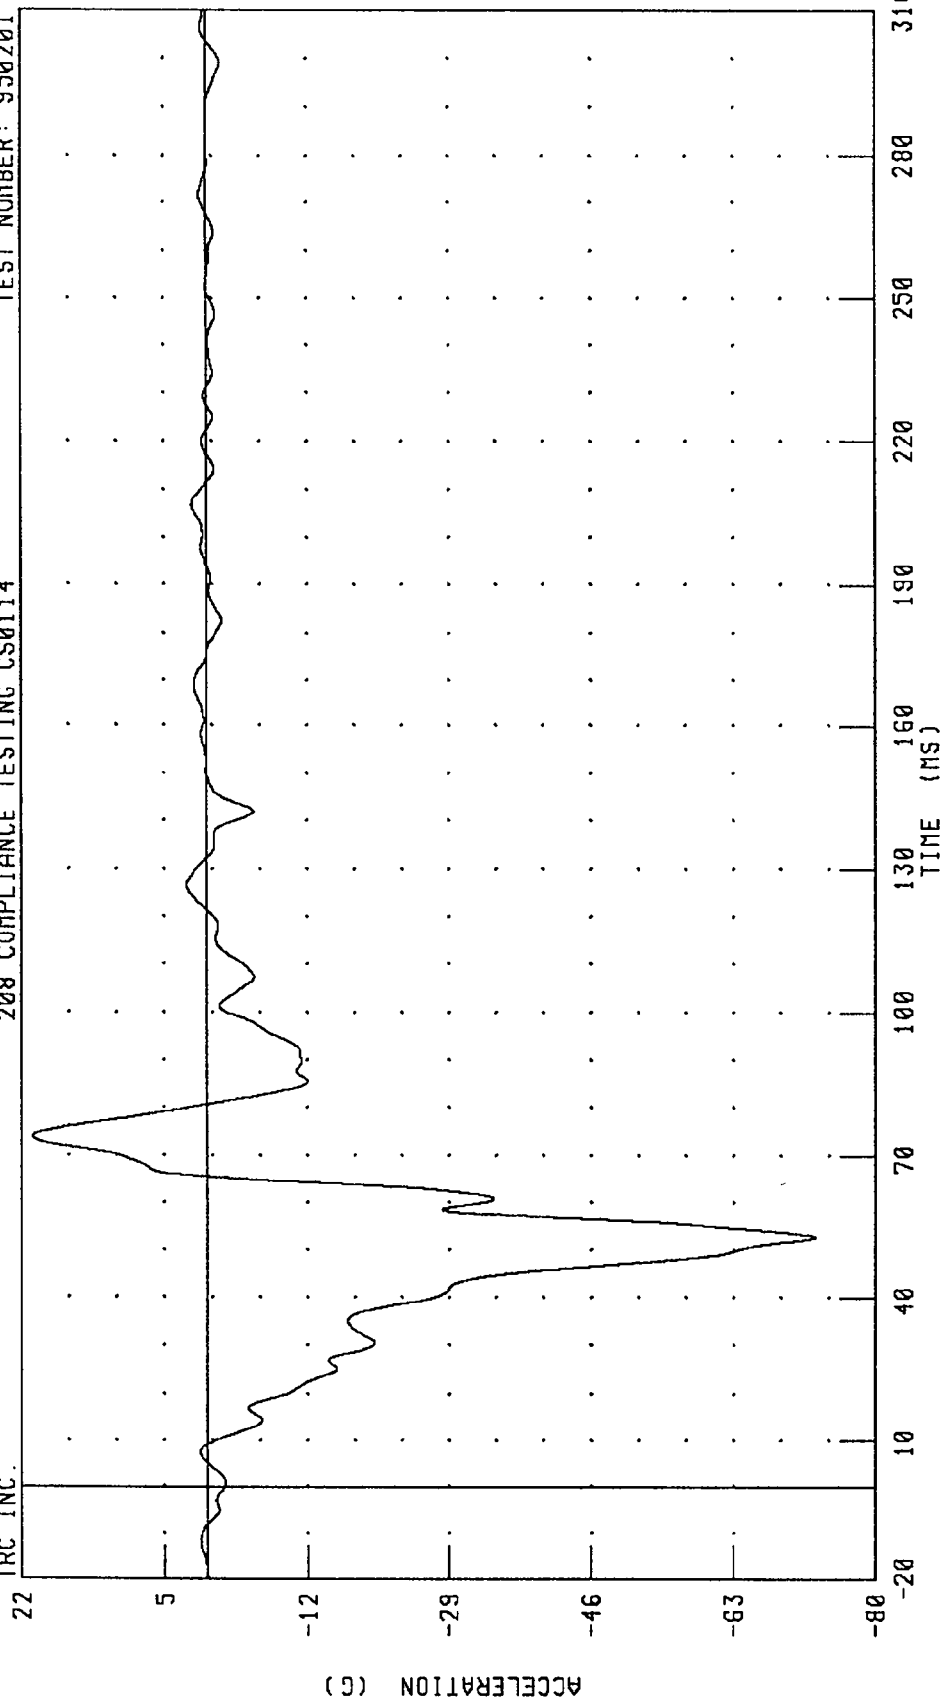


CHANNEL: BCRXG1 FILTER: CH. CLASS 60

PEAK DATA: 20.61 G @ 73.92 MS; -72.78 G @ 52.72 MS

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
LEFT BRAKE CALIPER X-AXIS ACCELERATION
208 COMPLIANCE TESTING CS0114

TEST NUMBER: 950201

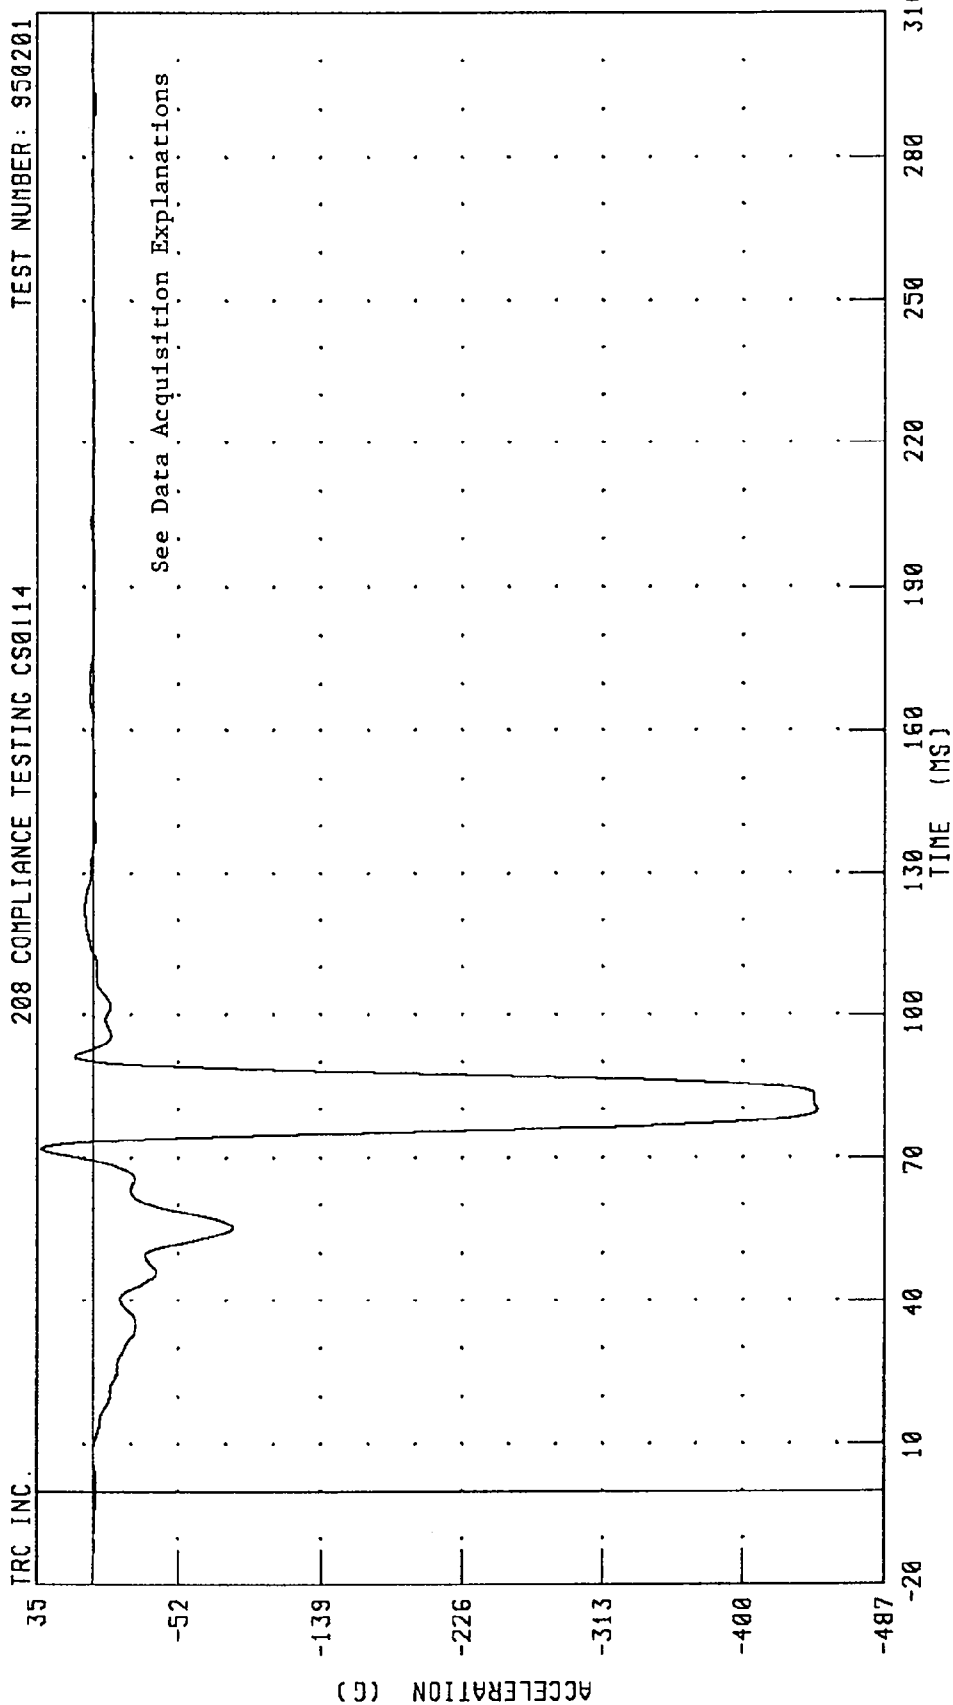


CHANNEL: BCLXG1 FILTER: CH. CLASS 60

PEAK DATA: 31.92 G @ 71.92 MS; -445.87 G @ 79.92 MS

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
DASH PANEL CENTER X-AXIS ACCELERATION
208 COMPLIANCE TESTING CS0114

TEST NUMBER: 950201

TRC INC.

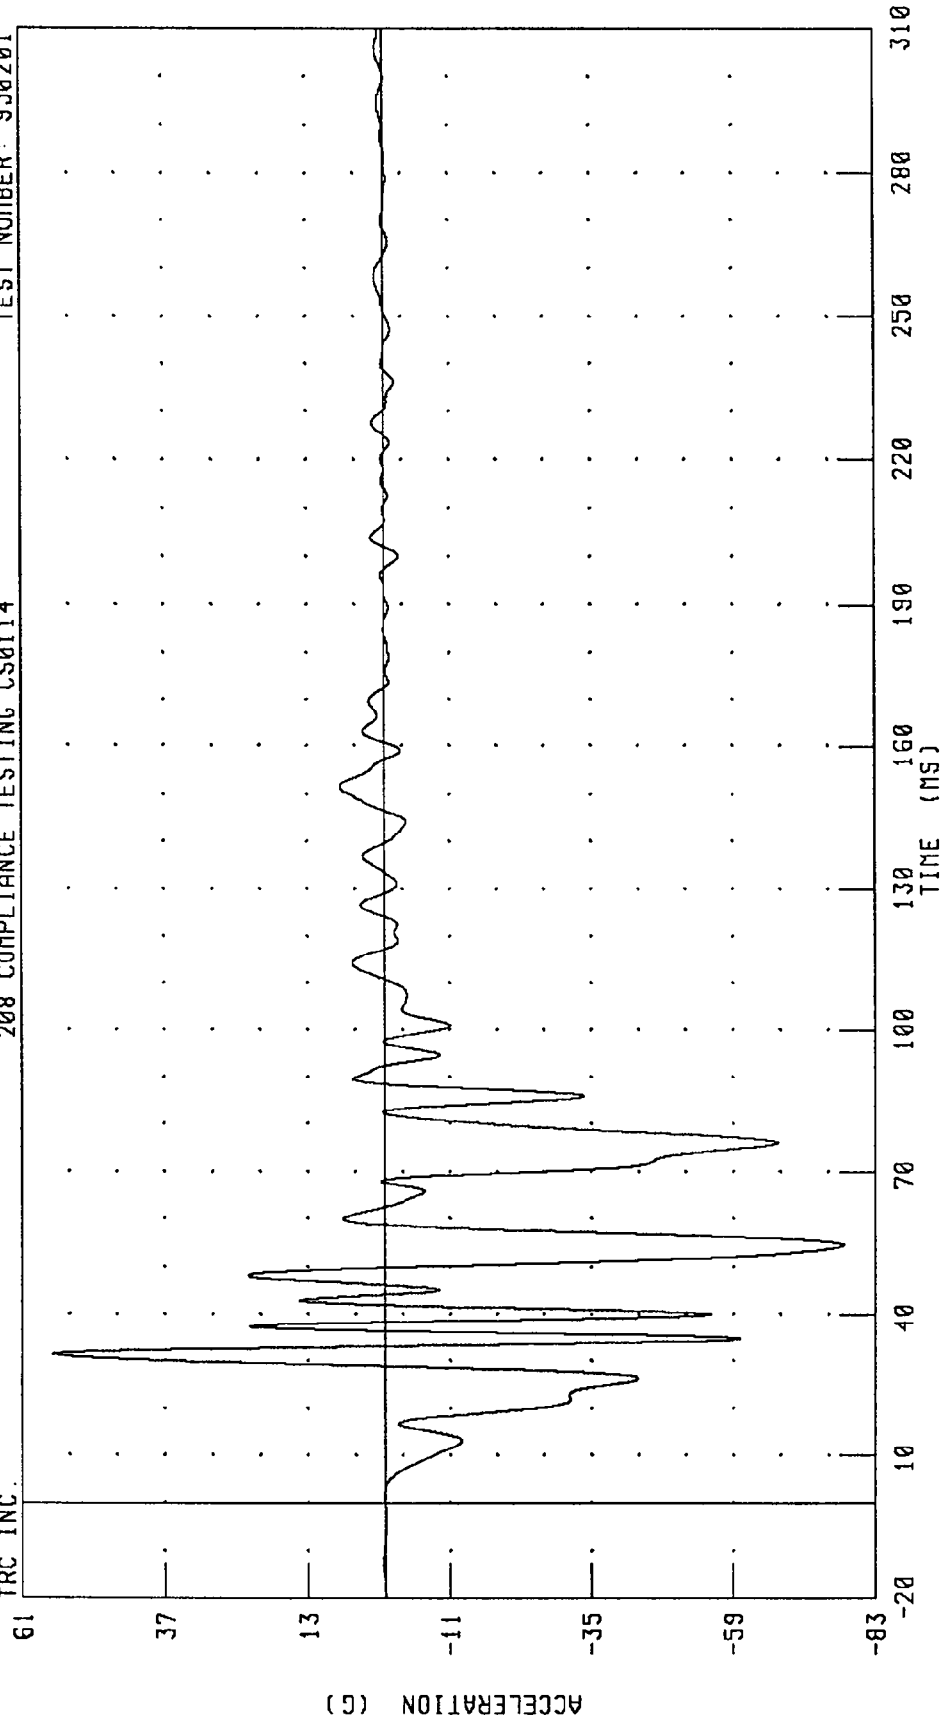


PEAK DATA: 55.77 G @ 31.44 MS; -77.63 G @ 54.56 MS

CHANNEL: DPCXG1 FILTER: CH. CLASS 60

1995 PONTIAC SUNFIRE INTO FLAT FRONTAL BARRIER
 VEHICLE REAR CENTER Z-AXIS ACCELERATION
 208 COMPLIANCE TESTING CS0114

TEST NUMBER: 950201

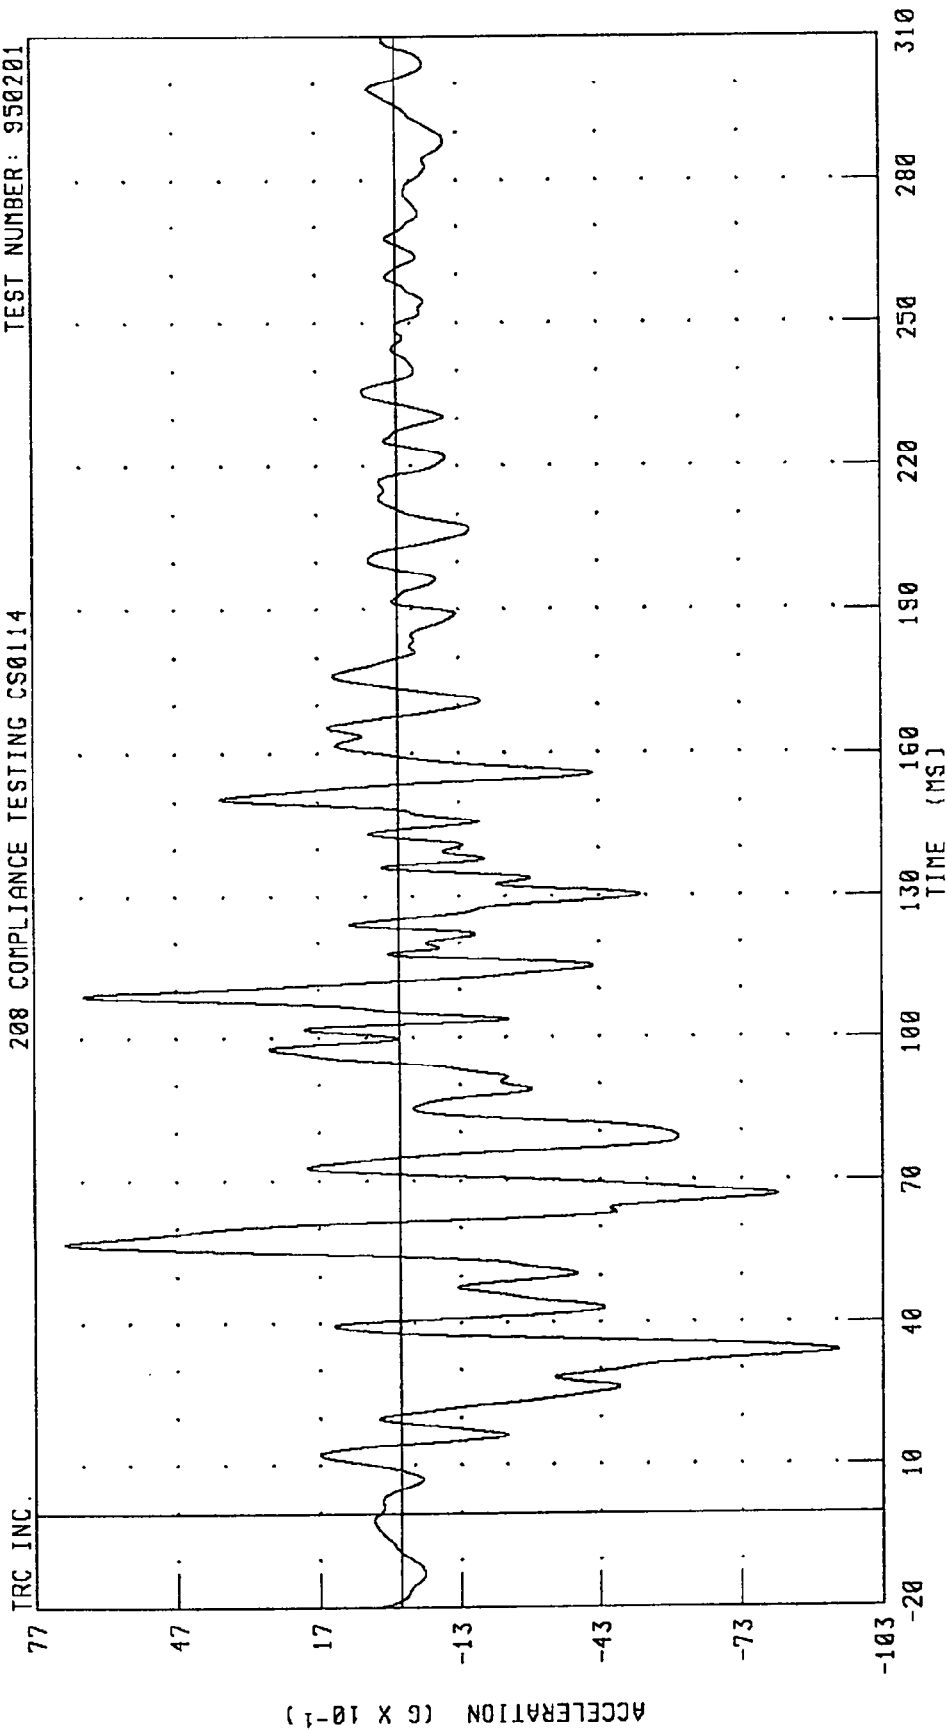

CHANNEL: TFCZG1 FILTER: CH. CLASS 60

PEAK DATA: 7.06 G @ 56.88 MS, -9.36 G @ 33.84 MS

Appendix C

Manufacturer's Vehicle Information

OVSC QUESTIONS & GM RESPONSES
REGARDING FMVSS 208 INFORMATION REQUEST

1995 Pontiac Sunfire (all models)

NEF-31CCa/IR-1534

Item 1

Please inform OVSC whether the air bag automatic restraint system provided at the driver's and passenger's seating positions in your vehicle is certified to meet the requirements of S4.1.2.1(c)(1) or S4.1.2.1(c)(2) for FMVSS No. 208.

GM Response

The air bags provided at the driver's and passenger's designated seating positions in the subject vehicle, along with the manual 3-point safety belt, were installed to meet the requirements of paragraphs S4.1.2.1(a) and S4.1.2.1(c)(2) of FMVSS 208.

Item 2

If the automatic restraint system provided at the driver's and passenger's seating positions in the subject vehicle was installed to meet the requirements of S4.1.2.1(c)(1), please provide a copy of the certification test reports for each of the test configurations required by that section of the standard (i.e., moving barrier lateral impact and dynamic rollover) and a copy of the certification reports for the frontal/angular barrier impact test required by S4.1.2.1.

GM Response

Since the subject vehicle's front outboard restraint systems are installed to meet the requirements of S4.1.2.1(c)(2), no response is required.

Item 3

If a manual 3-point safety belt is provided with the driver's and passenger's automatic restraint system in order to meet the requirements of S4.1.2.1(c)(2), please provide a copy of the certification test reports for each of the test configurations required by that section of the standard (i.e., frontal/angular barrier impact test of the automatic restraint system with the manual safety

belt unfastened and frontal/angular barrier impact test of the automatic restraint system with the manual safety belt fastened).

GM Response

Attachment A includes those portions of the frontal barrier test reports pertinent to the FMVSS 208 requirements.

Item 4

If the manual safety belt provided at the driver's and passenger's seating positions was not installed to meet the requirements of S4.1.2.1(c)(2), please provide a copy of a crash test report or engineering analysis showing that the use of the manual safety belt with the automatic restraint system does not affect the ability of the vehicle to meet the requirements FMVSS No. 208.

GM Response

Since the manual safety belt is installed to meet the requirements of S4.1.2.1(c)(2) of FMVSS 208, no response is required.

Item 5

If the vehicle uses a pressure vessel to inflate the air bag, provide a copy of the test reports or engineering analysis to demonstrate that it meets all the requirements of S9.1.

GM Response

The air bag installed in this vehicle does not incorporate a pressure vessel to inflate the system. Therefore, no response is required.

Item 6

If the vehicle uses an explosive device to inflate the air bag, provide a copy of the test reports or engineering analysis to demonstrate that it meets all of the requirements of S9.2.

GM Response

The air bag installed in this vehicle does not incorporate an explosive device to inflate the

system. Therefore, no response is required.

Item 7

State, for any safety belt system in this vehicle, whether or not it is equipped with a tension-relieving device. Provide a copy of the information furnished in accordance with S7.4.2, if the tension-relieving device is used.

GM Response

This vehicle is not equipped with a tension-relieving device on the safety belt systems.

Item 8

FMVSS No. 208, S8.1.5 allows the manufacturer the option of having movable vehicle windows and vents placed in the closed position. State whether the vehicle's movable windows and vents were opened or closed for the certification tests.

GM Response

The windows and vents were open during testing, except during tests C9676, C9714 and C9753.

Item 9

FMVSS No. 208, S5.1 provides a manufacturer with the option of using either a Part 572(B) or 572(E) test dummy. Please inform OVSC which test dummy was used in each seat for each certification test. Submit dummy placement measurements including diagrams or photographs which show exactly where measurements were taken. Enclosed is a diagram of some of OVSC's dummy measurements. Where possible, use the dimension shown in the diagram to provide the individual dummy placement measurements.

State whether the vehicle has a foot rest for the driver.

If the vehicle can be equipped with a split front bench seat, state whether the driver dummy was located so that the midsagittal plane was centered on the steering wheel rim or the center of the seat cushion. Also, state whether the passenger dummy was located so the midsagittal plane was centered the same distance from the longitudinal centerline of the vehicle as the driver dummy or in the center of the seat cushion.

GM Response

The Part 572(E) test dummy was used in each front outboard seat position during certification testing for the subject vehicle. Attachment B includes the available dummy placement information.

The driver position is not equipped with a foot rest.

A split front bench seat is not available in the subject vehicle.

Item 10

Provide the seat positioning, steering column positioning, and fuel tank data on the enclosed form. If more than one front seating configuration, steering column or fuel tank are available on this vehicle, provide separate information for each.

GM Response

Attachment C includes the requested information.

Item 11

If the vehicle is equipped with adjustable seat belt anchorages, provide the manufacturer's nominal design position for a 50th percentile adult male occupant.

GM Response

The 4-door model of the subject vehicle is equipped with an adjustable shoulder belt anchorage. The nominal design position for the adjustable shoulder belt anchorage for a 50th percentile adult male occupant is the second position from the top.

Item 12

Provide the speed at impact, vehicle test weight, and resulting injury criteria (i.e., HIC, chest acceleration, chest compression for the Part 572(E) dummy and femur loads) recorded for all certification tests conducted to meet the requirements of S4.1.2.1.

In addition, include each dummy's head and chest acceleration versus time plots and femur load versus time plots for the full frontal barrier impact tests. Mark these plots to indicate when the

following and any other significant events occur:

- 12.1 Driver and passenger knee contact with the knee bolster
- 12.2 Collapse of the driver and passenger knee bolsters
- 12.3 Steering column stroke (when it starts and when it ends)
- 12.4 Driver: Contact of the head with the air bag, steering wheel hub, windshield, header and any other contact points
Passenger: Contact of the head with the air bag, instrument panel, windshield, header and any other contact points
- 12.5 Contact of the driver's torso with the air bag, steering wheel and hub
- 12.6 Time during event when each air bag starts to deploy and when it is fully deployed
- 12.7 Mark on the plots any unexpected events, like steering wheel fracture, windshield contact, windshield header contact, that affected the normal loading characteristics

GM Response

Attachment D includes a summary of the requested injury criteria information and data plots. The requested "marked" reference points on these plots are not determined by GM in the ordinary course of our certification activities. To respond to the agency's request, however, the information marked on the requested plots was estimated by an analysis of the data. Therefore, the specific "marked" locations should be considered our approximation of the requested reference points.

Item 13

When vehicle components must be removed to obtain the proper test weight, what components do you recommend for removal and in what priority order do you recommend removal?

GM Response

GM does not typically prioritize which components are to be removed from a test vehicle to accommodate test weight. However, components that have been removed during our testing include trunk interior trim, spare tire and jack, rear seats and rear carpeting. Additional components that may have been removed during specific tests include rear door trim, rear bumper fascia, rear bumper and the deck lid.

The as received mass distribution for the test vehicle should be maintained with the following notations:

- 1) Front occupant mass distributes 50% front wheels, 50% rear wheels.
- 2) Luggage mass placed in the trunk distributes 105% rear wheels; -5% front wheels.

Attachment B

USG 3135

**2 pages
(including this cover)**

FRONT SEAT MEASUREMENT TABLE

DRIVER (MM)

PASSENGER (MM)

HH

280

285

NR

400

CS

290

KDL/R

180

228

SH

140

145

SHY

255

255

HS

260

260

Attachment C

USG 3135

3 pages
(including this cover)

TEST VEHICLE INFORMATION

Vehicle Model Year & Make: 1995 PONTIAC
Vehicle Model & Body Style: SUNFIRE (SEDAN / COUPE)

1. NOMINAL DESIGN RIDING POSITION - -

For adjustable driver and passenger seat backs.
Please describe how to position the inclinometer to
measure the seat back angle. Include description of
the location of the adjustment latch detent if applicable.
Indicate, if applicable, how the detents are numbered
(Is the first detent "0" or "1"?).

Seat back angle for driver's seat = degrees.


Measurement Instructions:

CUT SEAT FABRIC @ CENTER OF SEAT BACK DIRECTLY
BELOW HEAD RESTRAINT, EXPOSING U-CHANNEL. PLACE
INCLINOMETER ON FRAME, SET TO 21°

Seat back angle for passenger's seat = degrees.

Measurement Instructions:

SAME AS DRIVER

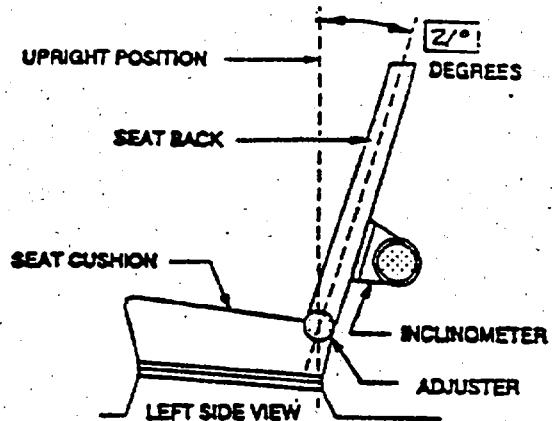

2. SEAT FORE & AFT POSITIONS - -

Provide instructions for positioning the driver and front outboard passenger seat(s) in the center of fore and aft travel. For example, indicate how the detents are numbered (Is the first detent "0" or "1"?). Provide information to locate the detent in which the seat track is to be locked.


Positioning of the driver's seat:

POSITION SEAT AT MID-POINT OF FORE/REAR SEAT TRAVEL.

Positioning of the passenger's seat (if applicable):

3. FUEL TANK CAPACITY DATA - -

- 3.1 A. "Usable Capacity" of standard equipment fuel tank = 15.2 gallons.
- B. "Usable Capacity" of optional equipment fuel tank = gallons.
- C. "Usable Capacity" of vehicle(s) used for certification testing to requirements of FMVSS 301 = 15.2 gallons.

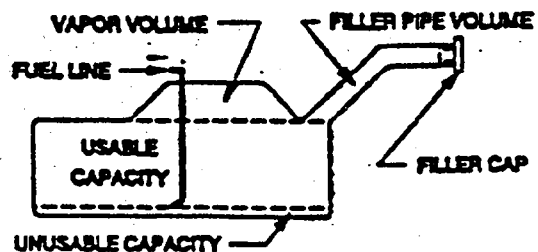

VEHICLE FUEL TANK ASSEMBLY

Operational Instructions:

TEST VEHICLE INFORMATION

3.2 Amount of Stoddard solvent added to vehicle(s) used for certification test(s) = 14.4 gallons

3.3 Is vehicle equipped with electric fuel pump? ☒ YES ☐ NO

If YES, explain the vehicle operating conditions under which the fuel pump will pump fuel.

WITH KEY IN THE 'ON' POSITION, THE FUEL PUMP WILL PRIME FOR 2-5 SECONDS, THEN SHUT OFF. WITH THE KEY IN THE 'RUN' POSITION, AND IF THERE IS OIL PRESSURE, THE FUEL PUMP IS PUMPING FUEL.

4. STEERING COLUMN ADJUSTMENTS --

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes when it is moved through its full range of driving positions.


If the tested vehicle has any of these adjustments, does your company use any specific procedures to determine the geometric center.

Operational Instructions:

TILT WHEEL HAS FIVE (5) POSITIONS.

MIDPOINT IS 3RD NOTCH FROM

TOP OR BOTTOM.

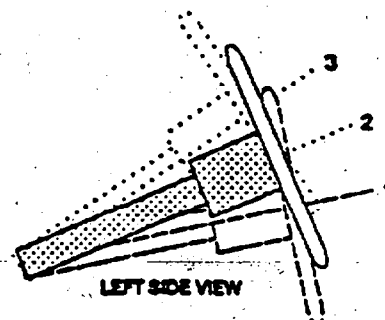

LEFT SIDE VIEW

STEERING COLUMN ASSEMBLY