

V2780
2107

CALSPAN REPORT NUMBER: 8404-5

**VEHICLE-TO-VEHICLE
90° SIDE IMPACT OF A
1995 FORD ESCORT 2-DOOR HATCHBACK TRAVELING 45 kph
INTO THE LEFT FRONT QUARTER OF A
1994 OLDSMOBILE CUTLASS SUPREME 4-DOOR SEDAN TRAVELING 22.5 kph**

CALSPAN TEST NUMBER: A109-5-1716

Aug. 14, 1997

CALSPAN SRL CORPORATION
P.O. BOX 400
BUFFALO, NEW YORK 14225



FINAL REPORT

PREPARED FOR:

U. S. Department of Transportation
Research and Special Programs Administration
Volpe National Transportation Systems Center
Kendall Square
Cambridge, MA 02142

This Test Report was prepared for the U.S. Department of Transportation, Research and Special Programs Administration, under Contract No. DTRS57-95-C-00009.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared By: James A. Czarniecki
James A. Czarniecki, Project Engineer

Approved By: David J. Travale
David J. Travale, Program Manager
Transportation Sciences Center

Approval Date: September 2, 1997

FINAL REPORT ACCEPTANCE BY:

Accepted By: _____
Contract Technical Manager

TECHNICAL REPORT STANDARD TITLE PAGE

1. Report No.	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle Vehicle-to-Vehicle 90° Side Impact of a 1995 Ford Escort traveling 45 kph into the left front quarter of a 1994 Oldsmobile Cutlass Supreme 4-Door Sedan traveling 22.5 kph.		5. Report Date Aug. 14, 1997	
		6. Performing Organization Code CAL	
7. Author(s) James A. Czarnecki, Project Engineer David J. Travale, Program Manager		8. Performing Organization Report No. 8404-5	
		10. Work Unit No.	
9. Performing Organization Name and Address Calspan SRL Corporation P.O. Box 400 Buffalo, New York 14225		11. Contract or Grant No. DTRS57-95-C-00009	
		13. Type of Report and Period Covered Final	
12. Sponsoring Agency Name and Address U.S. Department of Transportation Research and Special Programs Administration Transportation Systems Center Kendall Square, Cambridge, MA 02142		14. Sponsoring Agency Code DOT/NHTSA/NRD	
		15. Supplementary Notes	
16. Abstract A vehicle to vehicle 90° side impact of a 1995 Ford Escort 2-Door Hatchback traveling 45 kph into the left front quarter of a 1994 Oldsmobile Cutlass Supreme 4-Door Sedan traveling 22.5 kph was performed at the Calspan SRL Corporation crash facility in Buffalo, New York on Aug. 14, 1997. The 1995 Ford Escort (Vehicle 1) contained a 5 th percentile Hybrid III dummy in the left front driver seating position and a 6 year old toddler Hybrid III in the right front passenger seating position. The driver dummy was restrained using the vehicle's driver airbag and passive torso/active lap belt system. The right front passenger dummy was also restrained using the vehicle's passenger airbag and passive torso/active lap belt system. The vehicle airbag system did not deploy the airbags during the impact, therefore Calspan's onboard timing circuit forced the bags to deploy at 70 msec. All injury criteria for the driver and passenger dummies were within that allowed by Laboratory Test Procedure FMVSS 208 , Occupant Crash Protection, TP-208-09 dated March 15, 1993.			
17. Key Words		18. Distribution Statement <u>Copies of this report are available from:</u> NHTSA Technical Reference Division ; Mail Code: NAD-52 400 Seventh , S.W., Room 5108, Washington, D.C. 20590 Telephone No. (202) 366-4946 Attn: Robert Hornickle	
		19. Security Classif. (of this report) UNCLASSIFIED	
20. Security Classif. (of this page) UNCLASSIFIED		21. No. of Pages	22. Price

TABLE OF CONTENTS

<u>Section</u>		<u>Page No.</u>
1	PURPOSE AND TEST PROCEDURE	1-1
2	SUMMARY OF VEHICLE-TO-VEHICLE IMPACT TEST	2-1
3	VEHICLE ONE AND OCCUPANT INFORMATION	3-1
4	VEHICLE TWO INFORMATION	4-1
APPENDIX A	PHOTOGRAPHS: OVERALL TEST SETUP	A-1
APPENDIX B	PHOTOGRAPHS: VEHICLE ONE	B-1
APPENDIX C	PHOTOGRAPHS: VEHICLE TWO	C-1
APPENDIX D	VEHICLE AND DUMMY RESPONSE DATA	D-1
APPENDIX E	ACCIDENT RESEARCH DIVISION DATA	E-1

LIST OF FIGURES

<u>Figure No.</u>		<u>Page No.</u>
1	Vehicle-to-Vehicle Angled Front Impact Layout	3-2
2	Vehicle 1 Occupant Clearance Dimensions	3-7
3	Summary of Vehicle 1 Accelerometer Data	3-8
4	Vehicle 1 Pre-Test Accelerometer Locations	3-9
5	Vehicle 1 Target Locations	3-10
6	Summary of Vehicle 2 Accelerometer Data	4-5
7	Vehicle 2 Pre-Test Accelerometer Locations	4-6
8	Vehicle 2 Target Locations	4-7
9	Camera Positions for Vehicle-to-Vehicle Impact Test	4-8

LIST OF TABLES

<u>Table No.</u>		<u>Page No.</u>
1	Vehicle 1 Test Parameter Data	3-3
2	Vehicle 1 Dummy Injury Criteria Values	3-6
3	Vehicle 2 Test Parameter Data	4-2
4	Vehicle High-Speed Camera Locations	4-9

Section 1

PURPOSE AND TEST PROCEDURE

This Vehicle-to-Vehicle impact test is part of the Crashworthiness Testing and Analysis Program sponsored by the Research and Special Programs Administration under Contract No. DTRS57-95-C-00009. The purpose of this Technical Task Directive (TTD 3) is to obtain responses from a 6 year old toddler Hybrid III Anthropomorphic Test Devices (ATD) during various vehicle-to-vehicle crashes.

This test was performed using two vehicles, a 1995 Ford Escort 2-Door Hatchback (Vehicle 1) and a 1994 Oldsmobile Cutlass Supreme 4-Door Sedan (Vehicle 2). The vehicles were aligned so the center of Vehicle 1's front bumper would contact the left front corner of Vehicle 2 with Vehicle 1 traveling at twice the speed of Vehicle 2. The test track was configured so that the direction of travel for Vehicle 2 was 90 degrees counter clockwise from that of Vehicle 1.

The 1995 Ford Escort 2-Door Hatchback contained a fully restrained 5th percentile Hybrid III ATD in the left front driver seating position and a fully restrained 6 year old toddler Hybrid III ATD in the right front passenger position. The 1994 Oldsmobile Cutlass Supreme 4-Door Sedan, contained two ballast 50th percentile male ATDs in the driver and right front passenger seating positions. The ATDs were restrained using the vehicle's 3-point belt systems.

Section 2

SUMMARY OF TEST

A vehicle-to-vehicle 90° side impact of a 1995 Ford Escort 2-Door Hatchback (Vehicle 1) traveling at 45 kph into the left front quarter of a 1994 Oldsmobile Cutlass Supreme 4-Door Sedan traveling at 22.5 kph, was performed at the Calspan SRL Corporation Crash Test Facility on Aug. 14, 1997. The vehicles were aligned so the center of Vehicle 1's front bumper would contact the left front corner of Vehicle 2 with Vehicle 1 traveling at twice the speed of Vehicle 2. The test track was configured so that the direction of travel for Vehicle 2 was 90 degrees counter clockwise from that of Vehicle 1.

Pre- and Post-test still photographs of the vehicles and dummies can be found in Appendices A through C. The impact event was documented with 1 real time movie camera and 9 high speed movie cameras. Vehicle photographic target locations can be found in Figure 5 and movie camera locations can be found in Figure 12.

A 5th percentile female Anthropomorphic Test Devices (ATD) was placed in the driver seating position and a 6 year old toddler ATD was placed in the right front passenger seating position. The driver ATD was fully restrained using the vehicle's driver airbag and safety belt system. The right front passenger ATD was also fully restrained using the passenger airbag and safety belt system.

The driver and right front passenger ATDs were instrumented with head and chest triaxial accelerometer packages; chest displacement potentiometers; and upper neck force and moment transducers packages. The driver ATD also contained left and right femur axial force load cells.

The 45 channels of vehicle and dummy transducer data were recorded on a PC based data acquisition system. The data was reduced, filtered and processed as required by the appropriate test procedures using PC based software. Appendix D contains the vehicle and the dummy response data in plotted format.

The vehicle system did not deploy the airbags during the impact, therefore Calspan's onboard timing circuit forced the bags to deploy at 70 msec. Chalk from the center of the driver ATD's face was transferred to the center of the driver side airbag. Chalk from the center of the passenger ATD's face was transferred to the center right portion of the passenger airbag.

The driver's (5th female) HIC was 104.0. The 3 millisecond chest clip was 26.7 g's with 40.5 mm of chest deflection. The driver's left and right femur loads were 727.9 and -727.0 respectively.

The 6 year old right front passenger's HIC was 99.6. The 3 millisecond chest clip was 29.1 g's with 3.1 mm of chest deflection.

Appendix E contains the accident investigation data sheets completed by NASS trained investigators.

Section 3

VEHICLE ONE AND OCCUPANT INFORMATION

Figure 1

VEHICLE-TO-VEHICLE IMPACT LAYOUT

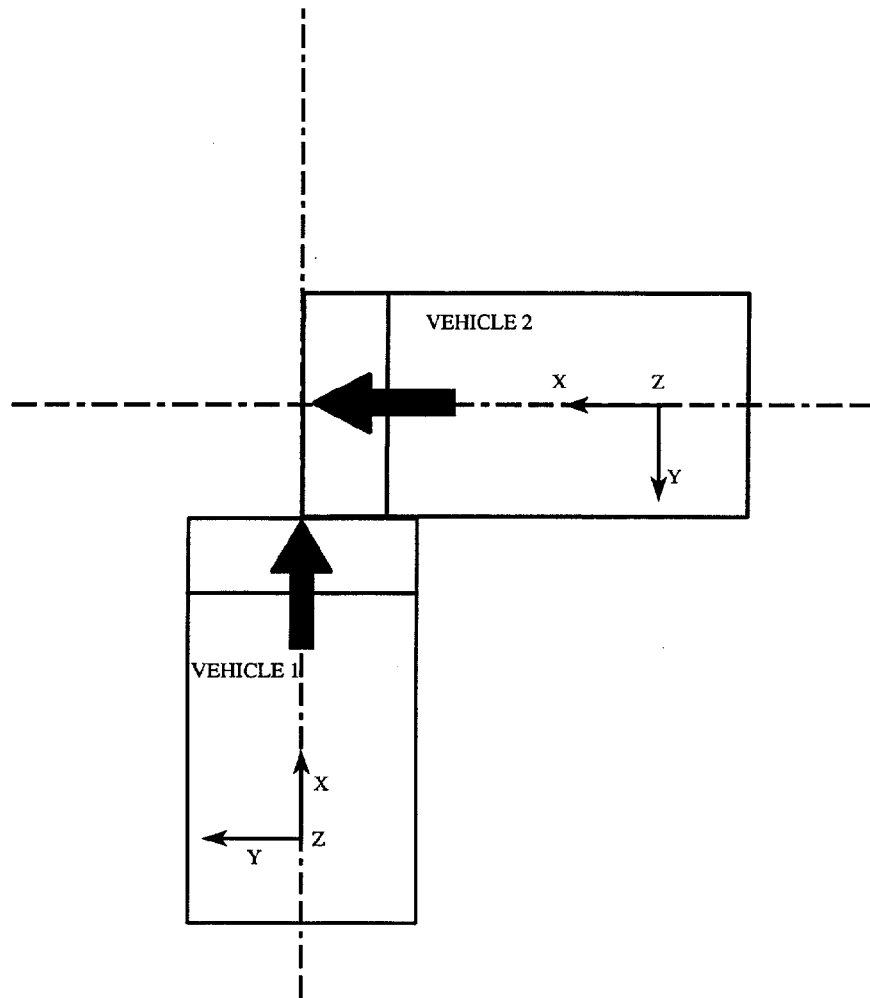


Table 1

VEHICLE 1 TEST PARAMETER DATA

TEST VEHICLE INFORMATION:

Year/Make/Model/Body Style: 1995 Ford Escort 2-Door Hatchback

NHTSA Test No.: - VIN.: 1FASP11JSXW107676

Body Color: Green Date of Manufacture: 09/94

Engine: 4 Cylinders; - C.I.D.; 1.9 Liters; - CC
X Gas; - Diesel; - Turbocharged
- Longitudinal; X Transverse

Transmission: 5 Speed; X Manual; - Automatic; - Overdrive

Final Drive: X Front Wheel; - Rear Wheel; - Four Wheel
X A/C; X P/S; X P/B; - P/wdo
- Tilt Wheel; - P/seats; - Cruise Control

Type of Occupant Restraint: Driver: Airbag, passive torso and active lap belt
Passenger: Airbag, passive torso and active lap belt

DATA RECORDED FROM VEHICLE'S TIRE PLACARD:

Tire Pressure (at capacity): Front 240 kpa, Rear 240 kpa

Recommended Tire Size: P175/65R14

Recommended Cold Tire Pressure: Front 221 kpa, Rear 221 kpa

Tires on Vehicle: P175/65R14; Manufacturer: Dunlop

Number of Occupants: 2 Front; 3 Rear; - 3rd Seat; 5 TOTAL

Type of Front Seats: X Bucket; - Bench; - Split Bench;

Type of Front Seat Back: - Fixed; X Adj. With; X Lever - Rot. Knob

GVWR: 1568 kg GAWR: Front 845 kg Rear 745 kg

Table 1

VEHICLE 1 TEST PARAMETER DATA (continued)

WEIGHT OF TEST VEHICLE AS RECEIVED FROM DEALER (WITH MAXIMUM FLUIDS) = UDW:

Right Front	=	<u>341.5</u>	kg	Right Rear	=	<u>207.0</u>	kg
Left Front	=	<u>339.5</u>	kg	Left Rear	=	<u>203.0</u>	kg
TOTAL FRONT WEIGHT	=	<u>681.0</u>	kg	(62.4 % of Total Vehicle Weight)			
TOTAL REAR WEIGHT	=	<u>410.0</u>	kg	(37.6 % of Total Vehicle Weight)			
TOTAL DELIVERED WEIGHT	=	<u>1091.0</u>	kg				

WEIGHT OF TEST VEHICLE WITH REQUIRED DUMMY:

Right Front	=	<u>346.0</u>	kg	Right Rear	=	<u>233.0</u>	kg
Left Front	=	<u>340.0</u>	kg	Left Rear	=	<u>245.5</u>	kg
TOTAL FRONT WEIGHT	=	<u>686.0</u>	kg	(58.9 % of Total Vehicle Weight)			
TOTAL REAR WEIGHT	=	<u>478.5</u>	kg	(41.1 % of Total Vehicle Weight)			
TOTAL TEST WEIGHT	=	<u>1164.5</u>	kg				

TARGET TEST WEIGHT PROVIDED BY COTR = 1146.0 kg

The target test weight is the vehicle curb weight plus the occupant weights. The rear seat, rear compartment trim, trunk trim, and spare tire were removed to achieve test weight.

Vehicle's Wheel Base = 2495 mm
 Location of Vehicle's C.G. = 1025 mm rearward of front wheel C/L

TEST VEHICLE ATTITUDE (all dimensions in millimeters):

Delivered Attitude:	RF <u>643</u> ;	LF <u>650</u> ;	RR <u>631</u> ;	LR <u>640</u>
Test Attitude:	RF <u>640</u> ;	LF <u>650</u> ;	RR <u>599</u> ;	LR <u>599</u>

Table 1

VEHICLE 1 TEST PARAMETER DATA (continued)

POST-IMPACT DATA:

Type of Test:	<u>Vehicle-to-Vehicle Frontal</u>	Impact Angle:	<u>90 degrees</u>
Date of Test:	<u>Aug. 14, 1997</u>	Time of Test:	<u>14:09</u>
Ambient Temperature:	<u>21</u>	°C at impact area	
Temperature in Occupant Compartment:	<u>21</u>	°C	
Windshield Molding Temperature:	<u>21</u>	°C	
Required Impact Velocity Range:	<u>21.7</u>	to	<u>23.3</u> kph
Impact Velocity:	primary = <u>22.5</u>	kph, secondary =	<u>22.5</u> kph
Distance From Front Bumper to Barrier Face When			
Entering Speed Trap:	<u>132</u>	cm.	
Exiting Speed Trap:	<u>30.5</u>	cm.	

VISIBLE DUMMY CONTACT POINTS:

	<u>Driver</u>	<u>Passenger</u>
Head	<u>Head into airbag ,Back of head into seat back</u>	<u>Face was brushed by airbag</u>
Chest	<u>Chest into airbag</u>	<u>Chest into airbag</u>
Abdomen	<u>-</u>	<u>-</u>
Left Knee	<u>Knee bolster</u>	<u>-</u>
Right Knee	<u>knee bolster</u>	<u>-</u>

<u>Door Opening</u>	<u>Front</u>		<u>Rear</u>	
	<u>Left</u>	<u>Right</u>	<u>Left</u>	<u>Right</u>
	<u>Closed/Operable</u>	<u>Closed/Operable</u>	<u>-</u>	<u>-</u>

<u>Seat Movement</u>	<u>Front</u>		<u>Rear</u>	
	<u>Left</u>	<u>Right</u>	<u>Left</u>	<u>Right</u>
Seat Back Failure	<u>None</u>	<u>None</u>	<u>-</u>	<u>-</u>
Seat Shift (mm.)	<u>0</u>	<u>0</u>	<u>-</u>	<u>-</u>

Table 2

VEHICLE 1 DUMMY INJURY CRITERIA VALUES

	MAXIMUM ACCELERATION ("G")							
	HEAD				CHEST			
	X	Y	Z	R	X	Y	Z	R*
DUMMY (1)	-24.0	-8.0	-22.4	32.9	-26.0	10.9	5.8	26.7
DUMMY (2)	-55.5	-30.3	19.8	60.3	-24.6	17.0	12.4	29.1

	MAXIMUM CHEST DISPLACEMENT (mm)
DUMMY (1)	40.5
DUMMY (2)	3.1

	MAXIMUM COMPRESSIVE FEMUR LOAD (NEWTONS)	
	RIGHT FEMUR	LEFT FEMUR
DUMMY (1)	-727.0	727.9
DUMMY (2)	-	-

	MAXIMUM LOAD (NEWTONS)		
	SHOULDER STRAP UPPER BELT LOAD	LAP STRAP RIGHT BELT LOAD	LAP STRAP LEFT BELT LOAD
DUMMY (1)	-	-	-
DUMMY (2)	-	-	-

	MAXIMUM ACCELERATION ("G")			
	HIC	t ₁ (SEC)	t ₂ (SEC)	Average Acceleration t ₁ TO t ₂
DUMMY (1)	104.0	64.0	100.0	24.23
DUMMY (2)	99.6	43.9	79.9	23.81

*Defined as exceeding 0.003 sec. duration

**As defined in FMVSS No. 208


Figure 2

VEHICLE 1 OCCUPANT CLEARANCE DIMENSIONS (mm)

	DRIVER (mm)	PASSENGERr
HZ	286	406
HH	351	488
HW	648	861
NSW	340	-
NIP	467	556
NH	307	-
CD	483	503
CS	262	-
KDL	160	239
KDR	160	239
1	457	-
2	-	-
SA	24 deg	24 deg
PA	25 deg	-
ULA	17 deg	21 deg
LLA	53 deg	38 deg

	DRIVER (mm)	PASSENGER
HR*	307	389
HS*	340	409
AD	114	142
HD	234	251
KK	251	150
AA	203	-
DT	21°C	21°C


DUMMY MEASUREMENT FOR FRONT SEAT PASSENGERS

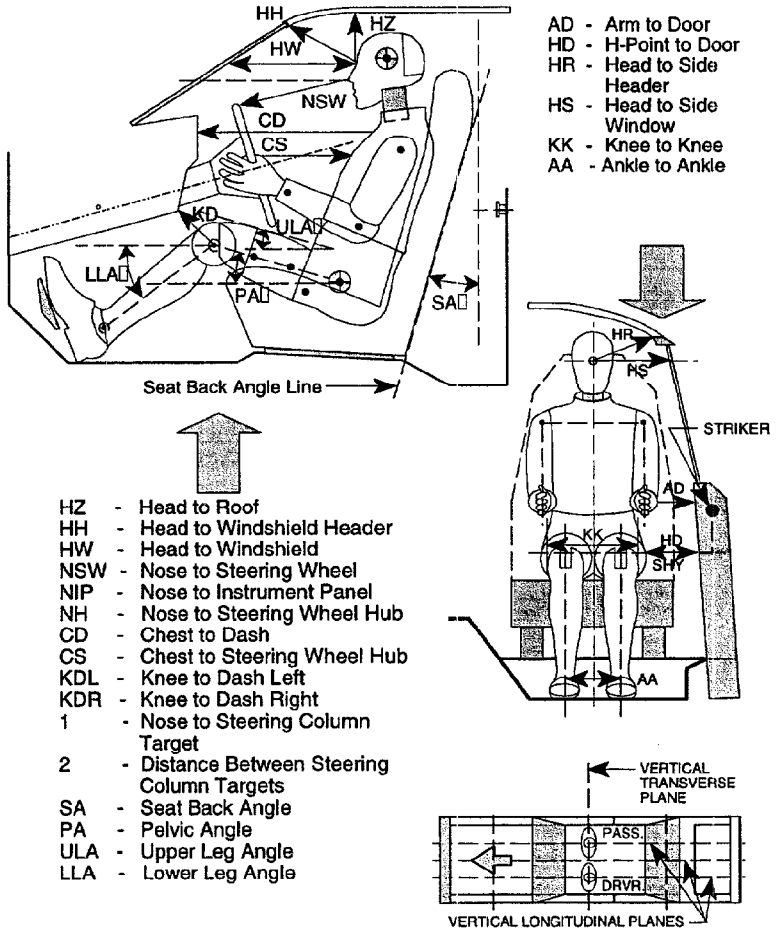

* Measurements taken from intersection of nose and forehead in accordance with revised FMVSS 208 instructions.

Figure 3

SUMMARY OF VEHICLE 1 ACCELEROMETER DATA

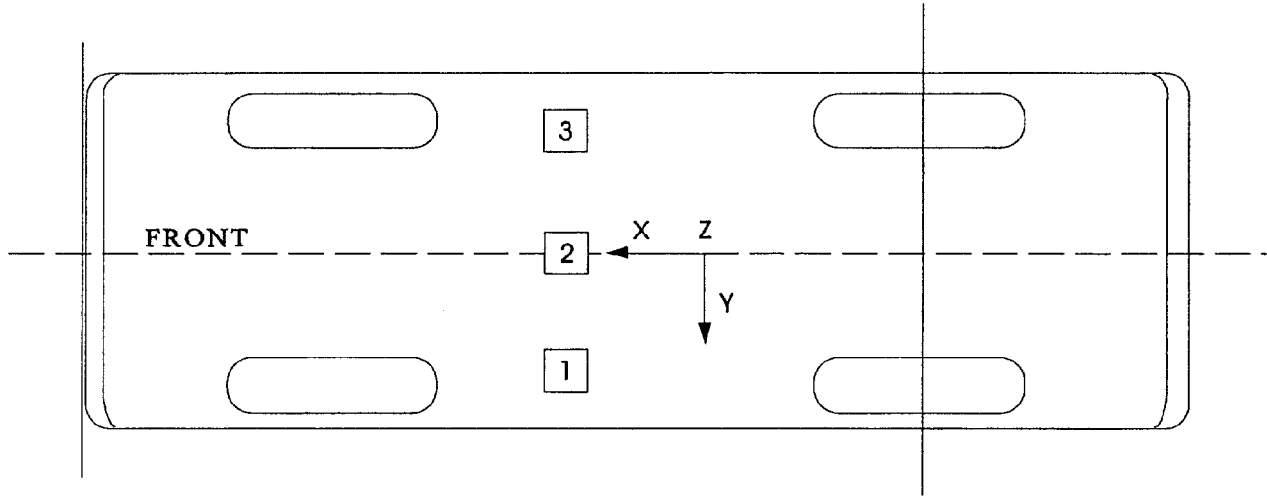


Vehicle: 1995 Ford Escort 2-Door Hatchback

NUMBER	DESCRIPTION	ENGR UNIT	MAXIMUM		MINIMUM		FILTER CLASS
			AMP	msec	AMP	msec	
1	V1 LEFT X	Gs	3.2	-8.4	-22.0	58.5	60.0
1	V1 LEFT Y	Gs	9.7	58.5	-2.3	114.7	60.0
2	V1 CENTER X	Gs	20.3	54.0	-4.1	-7.7	60.0
2	V1 CENTER Y	Gs	1.2	121.2	-9.4	40.5	60.0
2	V1 CENTER Z	Gs	5.7	105.9	-10.5	54.0	60.0
3	V1 RIGHT X	Gs	2.9	-8.2	-18.4	53.0	60.0
3	V1 RIGHT Y	Gs	1.1	115.8	-8.9	40.6	60.0

Figure 4

VEHICLE 1 PRE-TEST ACCELEROMETER LOCATIONS

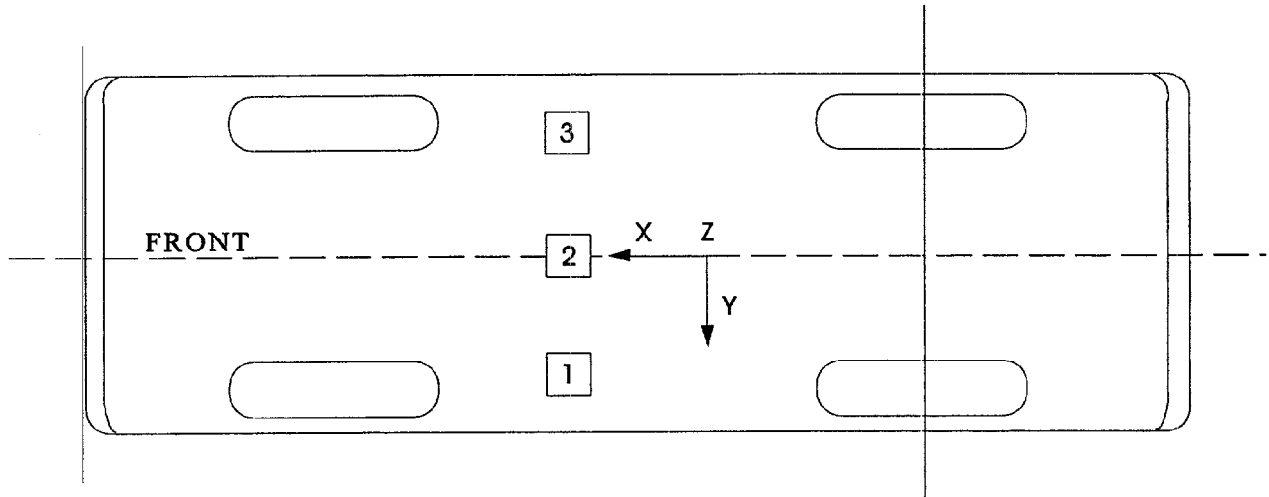


Test Description: 13.98 kph Frontal Vehicle to Vehicle Impact
 Test Vehicle: 1995 Ford Escort 2-Door Hatchback
 Reference Plane: X: Vehicle plane at rear bumper, positive forward;
Y: Vehicle longitudinal centerline, positive to the left; Z: Ground, positive up

VEHICLE No. 1		PRE-TEST AXIS (mm)			POST-TEST AXIS (mm)		
Loc. No.	DESCRIPTION	X	Y	Z	X	Y	Z
1	LEFT "B" PILLAR	1643	560	354	1643	560	354
2	CENTER BETWEEN "B" PILLARS	1673	0	401	1673	0	401
3	RIGHT "B" PILLAR	1643	-570	352	1643	-570	352

Figure 5

VEHICLE 1 TARGET LOCATIONS

(All dimensions in millimeters)

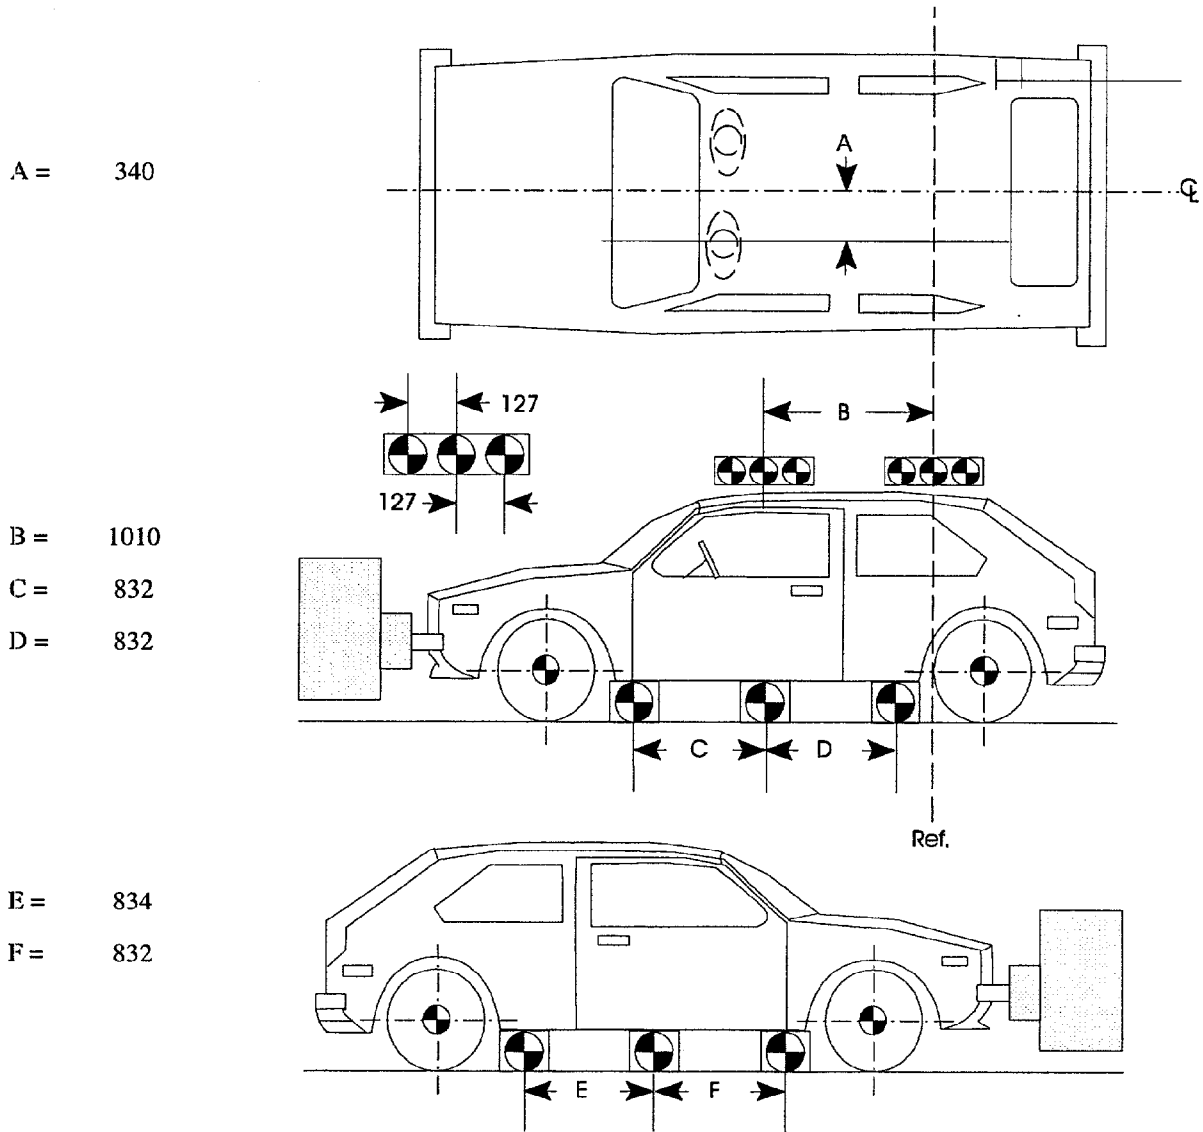

Section 4

VEHICLE TWO AND OCCUPANT INFORMATION

Table 3

VEHICLE 2 TEST PARAMETER DATA

TEST VEHICLE INFORMATION:

Year/Make/Model/Body Style: 1994 Oldsmobile Cutlass Supreme 4-Door Sedan
 NHTSA Test No.: - VIN.: 1G3WH52M1SD382924
 Body Color: White Date of Manufacture: 04/94
 Engine: 6 Cylinders; - C.I.D.; 3.1 Liters; - CC
X Gas; - Diesel; - Turbocharged
- Longitudinal; X Transverse
 Transmission: 4 Speed; - Manual; X Automatic; X Overdrive
 Final Drive: X Front Wheel; - Rear Wheel; - Four Wheel
X A/C; X P/S; X P/B; X P/wdo
X Tilt Wheel; - P/seats; X Cruise Control
 Type of Occupant Restraint: Driver: Airbag and active 3-point belt system
Passenger: Airbag and active 3-point belt system

DATA RECORDED FROM VEHICLE'S TIRE PLACARD:

Tire Pressure (at capacity): Front 300 kpa, Rear 300 kpa
 Recommended Tire Size: P215/60R16
 Recommended Cold Tire Pressure: Front 210 kpa, Rear 210 kpa
 Tires on Vehicle: P215/60R16; Manufacturer: Goodyear
 Number of Occupants: 3 Front; 3 Rear; - 3rd Seat; 6 TOTAL
 Type of Front Seats: - Bucket; - Bench; X Split Bench;
 Type of Front Seat Back: - Fixed; X Adj. With; X Lever - Rot. Knob
 GVWR: 2019 kg GAWR: Front 1126 kg Rear 893 kg

Table 3

VEHICLE 2 TEST PARAMETER DATA (continued)

WEIGHT OF TEST VEHICLE AS RECEIVED FROM DEALER (WITH MAXIMUM FLUIDS) = UDW:

Right Front	=	<u>487.0</u>	kg	Right Rear	=	<u>266.5</u>	kg
Left Front	=	<u>507.5</u>	kg	Left Rear	=	<u>272.5</u>	kg
TOTAL FRONT WEIGHT	=	<u>994.5</u>	kg	(<u>64.9</u> % of Total Vehicle Weight)			
TOTAL REAR WEIGHT	=	<u>539.0</u>	kg	(<u>35.1</u> % of Total Vehicle Weight)			
TOTAL DELIVERED WEIGHT	=	<u>1533.5</u>	kg				

WEIGHT OF TEST VEHICLE WITH REQUIRED DUMMY:

Right Front	=	<u>514.5</u>	kg	Right Rear	=	<u>326.5</u>	kg
Left Front	=	<u>534.5</u>	kg	Left Rear	=	<u>320.0</u>	kg
TOTAL FRONT WEIGHT	=	<u>1049.0</u>	kg	(<u>61.9</u> % of Total Vehicle Weight)			
TOTAL REAR WEIGHT	=	<u>646.5</u>	kg	(<u>38.1</u> % of Total Vehicle Weight)			
TOTAL TEST WEIGHT	=	<u>1695.5</u>	kg				

TARGET TEST WEIGHT PROVIDED BY COTR = 1694.0 kg

The target test weight is the vehicle curb weight plus the occupant weights. The rear seat, rear compartment trim, trunk trim, and trunk lid were removed. 32 kg of ballast were added to the vehicle to achieve test weight.

Vehicle's Wheel Base	=	<u>2731</u>	mm
Location of Vehicle's C.G.	=	<u>1041</u>	mm rearward of front wheel C/L

TEST VEHICLE ATTITUDE (all dimensions in millimeters):

Delivered Attitude:	RF <u>743</u> ;	LF <u>729</u> ;	RR <u>758</u> ;	LR <u>737</u>
Test Attitude:	RF <u>739</u> ;	LF <u>725</u> ;	RR <u>723</u> ;	LR <u>706</u>

Table 3

VEHICLE 2 TEST PARAMETER DATA (continued)

POST-IMPACT DATA:

Type of Test: Vehicle-to-Vehicle Impact Angle: 90 degrees
 Date of Test: Aug. 14, 1997 Time of Test: 14:09

Ambient Temperature: 21 °C at impact area

Required Impact Velocity Range: 44.3 to 45.9 kph

Impact Velocity: primary = 45.0 kph, secondary = 45.0 kph

Distance From Front Bumper to Barrier Face When


Entering Speed Trap: 132 cm.

Exiting Speed Trap: 30.5 cm.

<u>Door Opening</u>	<u>Front</u>		<u>Rear</u>	
	<u>Left</u>	<u>Right</u>	<u>Left</u>	<u>Right</u>
	<u>Closed/Operable</u>	<u>Closed/Operable</u>	<u>Closed/Operable</u>	<u>Closed/Operable</u>

Figure 6

SUMMARY OF VEHICLE 2 ACCELEROMETER DATA

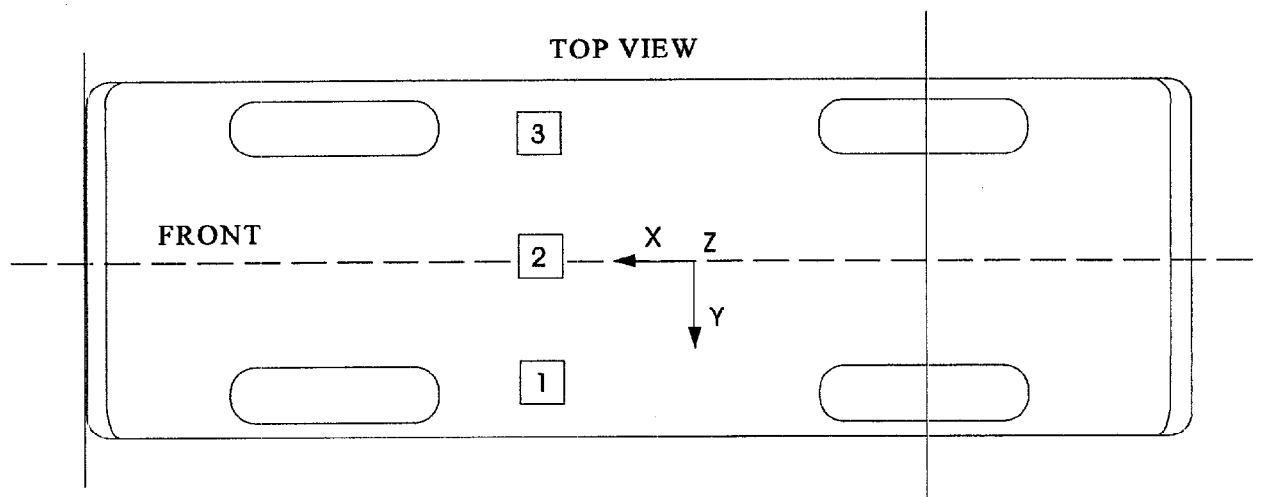


Vehicle: 1994 Oldsmobile Cutlass Supreme 4-Door Sedan

NUMBER	DESCRIPTION	ENGR UNIT	MAXIMUM		MINIMUM		FILTER CLASS
			AMP	msec	AMP	msec	
1	V2 LEFT X	Gs	2.7	45.6	-5.4	67.0	60.0
1	V2 LEFT Y	Gs	1.8	105.2	-7.3	49.4	60.0
2	V2 CENTER X	Gs	2.1	83.5	-8.1	53.8	60.0
2	V2 CENTER Y	Gs	2.0	105.1	-6.7	48.9	60.0
2	V2 CENTER Z	Gs	5.4	28.6	-4.4	89.7	60.0
3	V2 RIGHT X	Gs	10.0	53.7	-1.8	196.8	60.0
3	V2 RIGHT Y	Gs	7.0	57.1	-2.4	105.0	60.0

Figure 7

VEHICLE 2 PRE-TEST ACCELEROMETER LOCATIONS

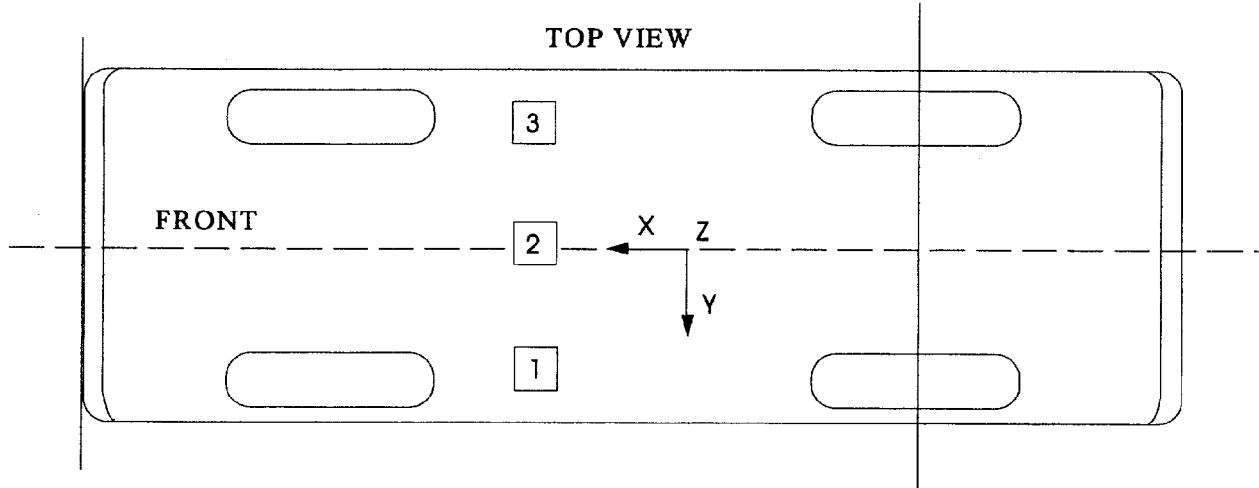

Test Description: 13.98 kph Frontal Vehicle to Vehicle Impact
 Test Vehicle: 1994 Oldsmobile Cutlass Supreme 4-Door Sedan
 Reference Plane: X: Vehicle plane at rear bumper, positive forward;
Y: Vehicle longitudinal centerline, positive to the left; Z: Ground, positive up


VEHICLE No. 1		PRE-TEST AXIS (mm)			POST-TEST AXIS (mm)		
Loc. No.	DESCRIPTION	X	Y	Z	X	Y	Z
1	LEFT "B" PILLAR	1894	480	450	1894	480	450
2	CENTER BETWEEN "B" PILLARS	1897	0	446	1897	0	446
3	RIGHT "B" PILLAR	1897	-480	445	1897	-480	445

Figure 8

VEHICLE 2 TARGET LOCATIONS

(All dimensions in millimeters)


A = 350

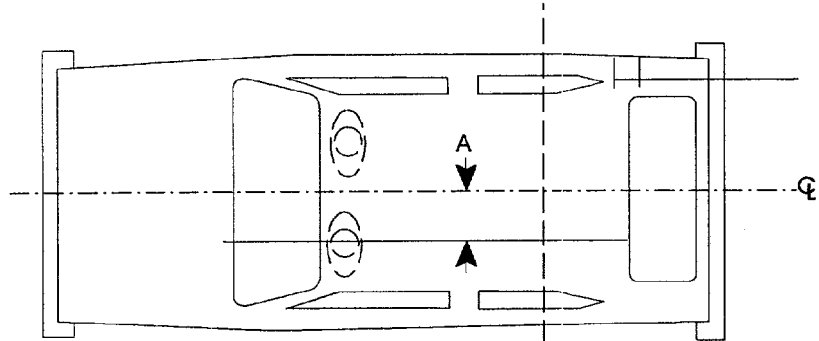

B = 914

C = 935

D = 933

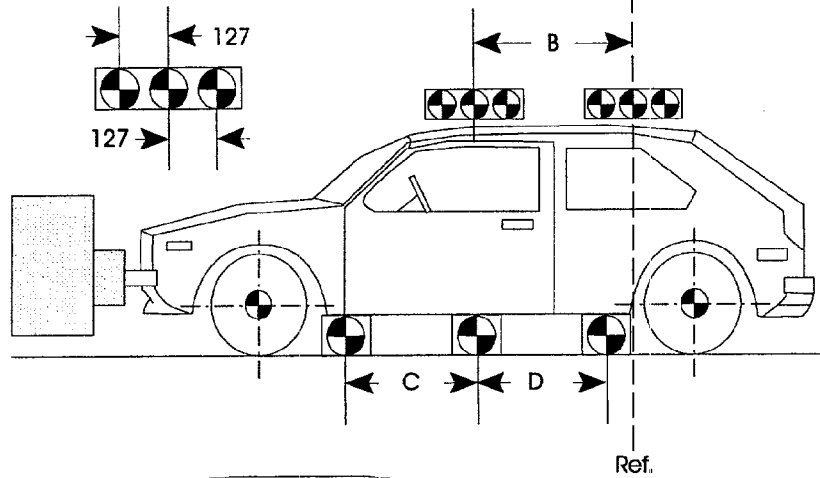

E = 930

F = 933

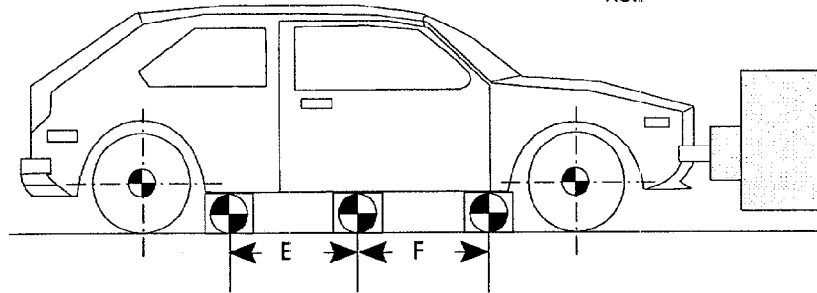


Figure 9

CAMERA POSITIONS FOR VEHICLE-TO-VEHICLE IMPACT TEST

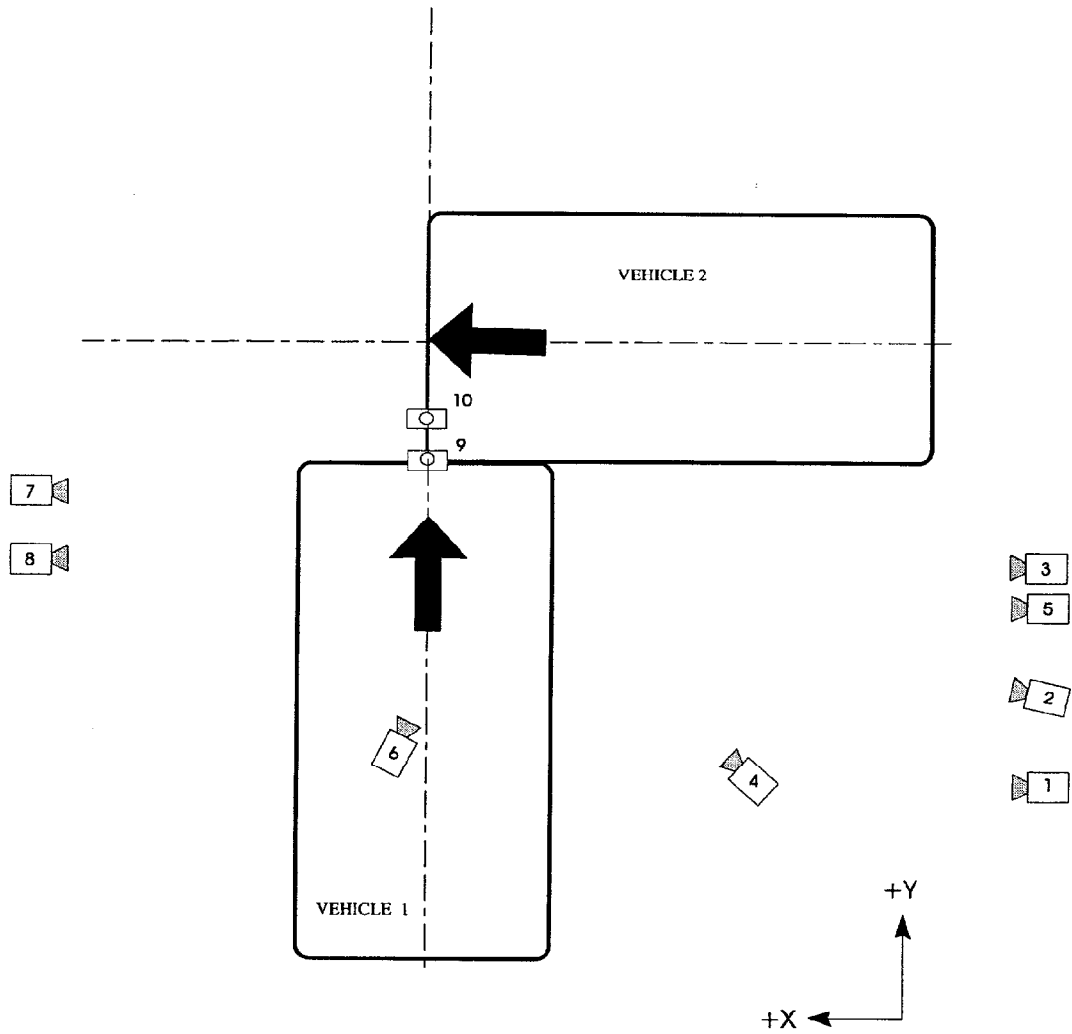


Table 4

HIGH-SPEED CAMERA LOCATIONS

Test No. A109-5-1716

Vehicle: 1995 Ford Escort 2-Door Hatchback, 1994 Oldsmobile Cutlass Supreme 4-Door Sedan

CAMERA LOCATION	VIEW	CAMERA POSITIONS (mm)*			ANGLE** (deg)	LENS (mm)	SPEED (fps)
		X	Y	Z			
1	Real-Time Camera	-	-	-	-	24	
2	Overall Right Side View	6807	1118	1143	-1	950	
3	Right Impact Point View	6985	1473	1118	-3	950	
4	Right Passenger and Interior View	2438	3277	1803	-21	900	
5	Closeup Passenger Side View	7950	1778	1219	-4	n/a	
6	Vehicle 1 Closeup Passenger Rear View	-	-	-	-	870	
7	Overall Left Side View	6807	1029	1219	-1	790	
8	Left Driver View	7087	1308	1295	-4	830	
9	Overhead Overall View	406	305	9805	-90	1000	
10	Overhead Closeup View	406	0	9805	-90	1010	

*X = film plane to Vehicle 1 longitudinal centerline, positive left

Y = film plane to impact location, positive forward

Z = film plane to ground

** = referenced to horizontal plane

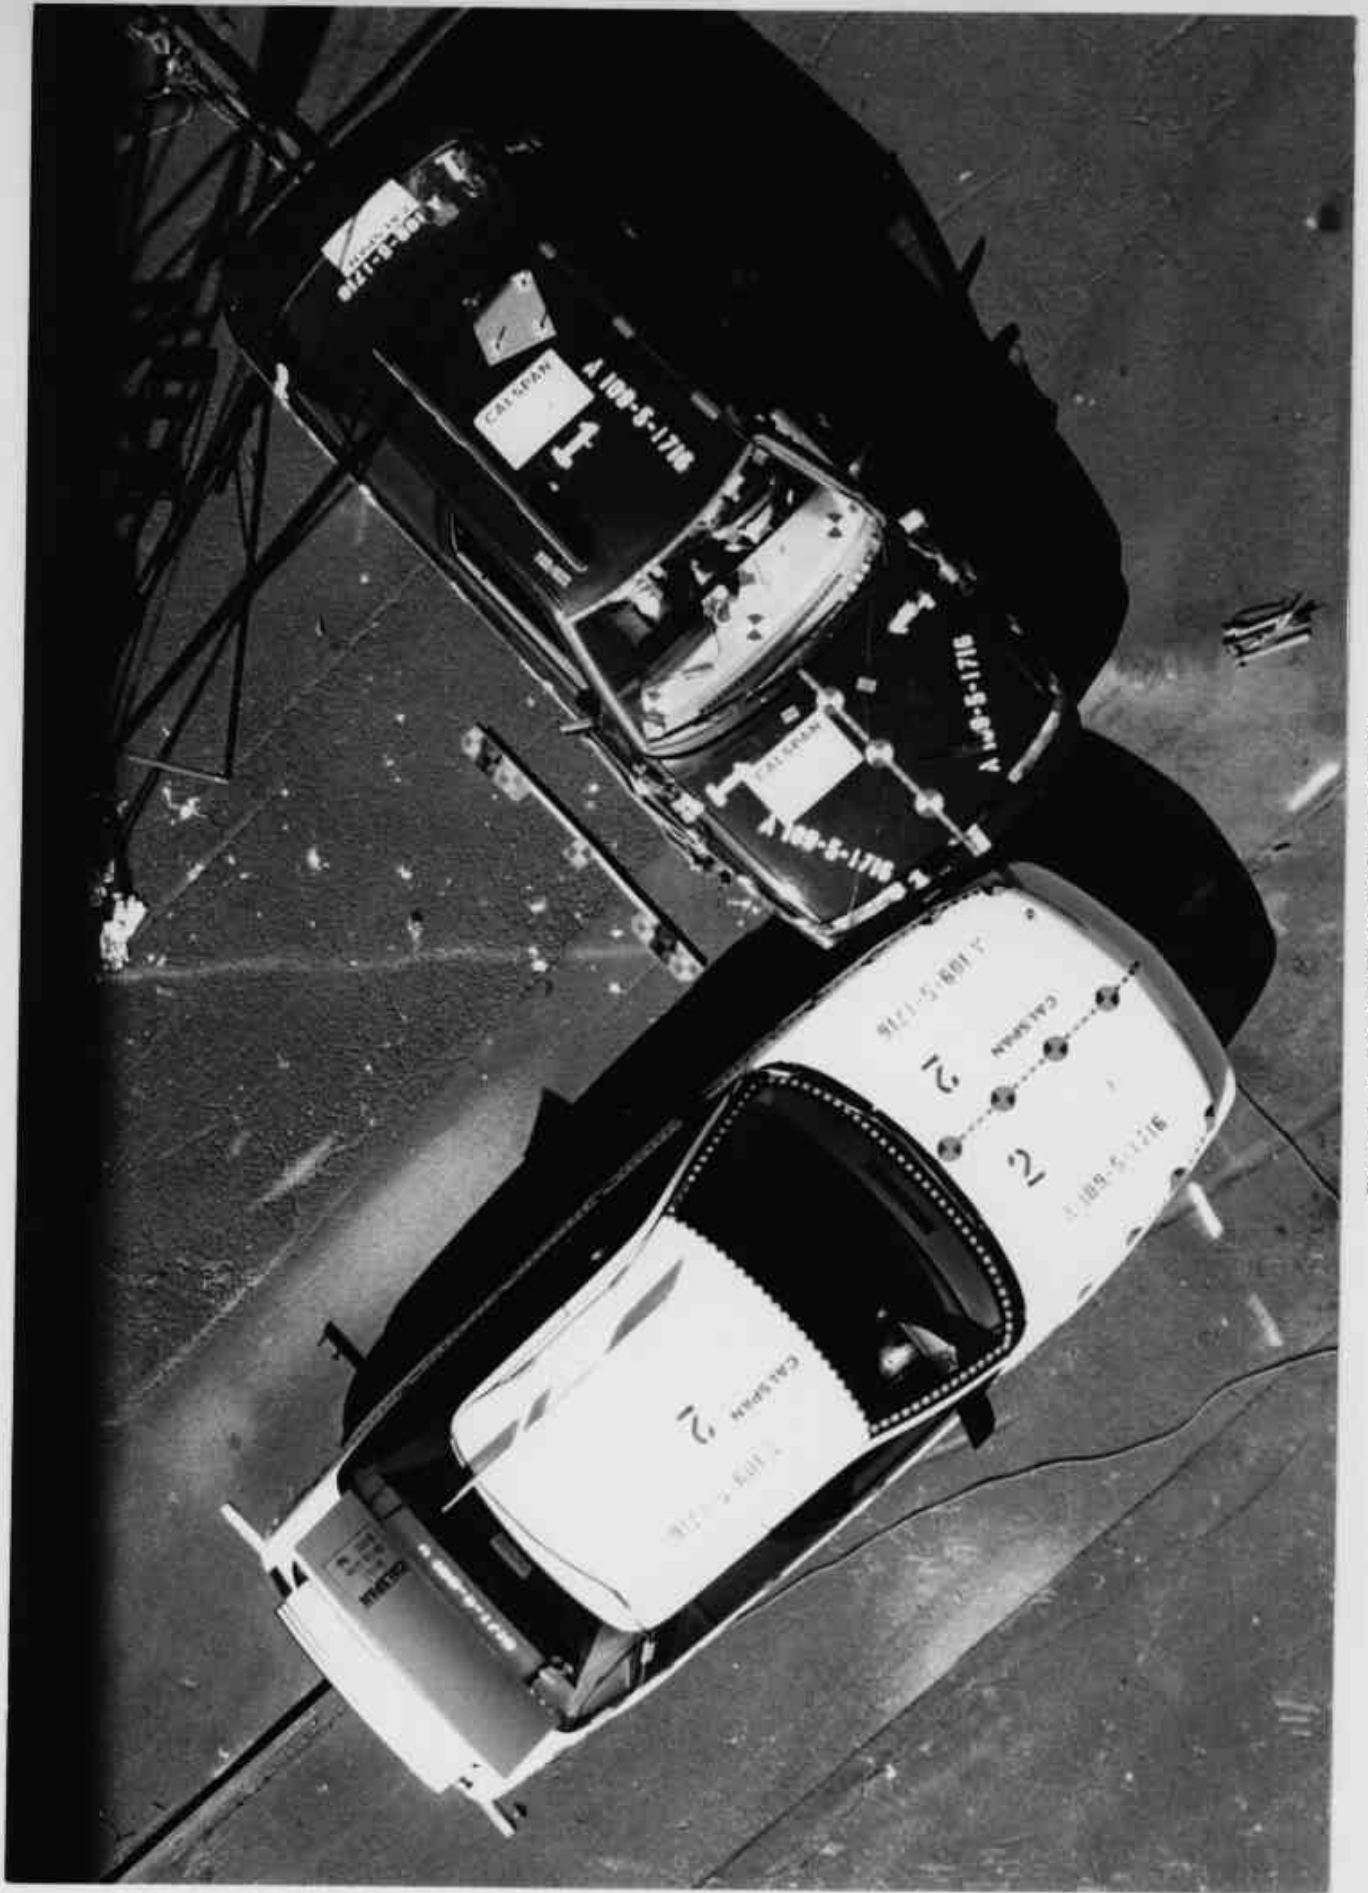


Figure A-1 PRE-TEST OVERHEAD VIEW

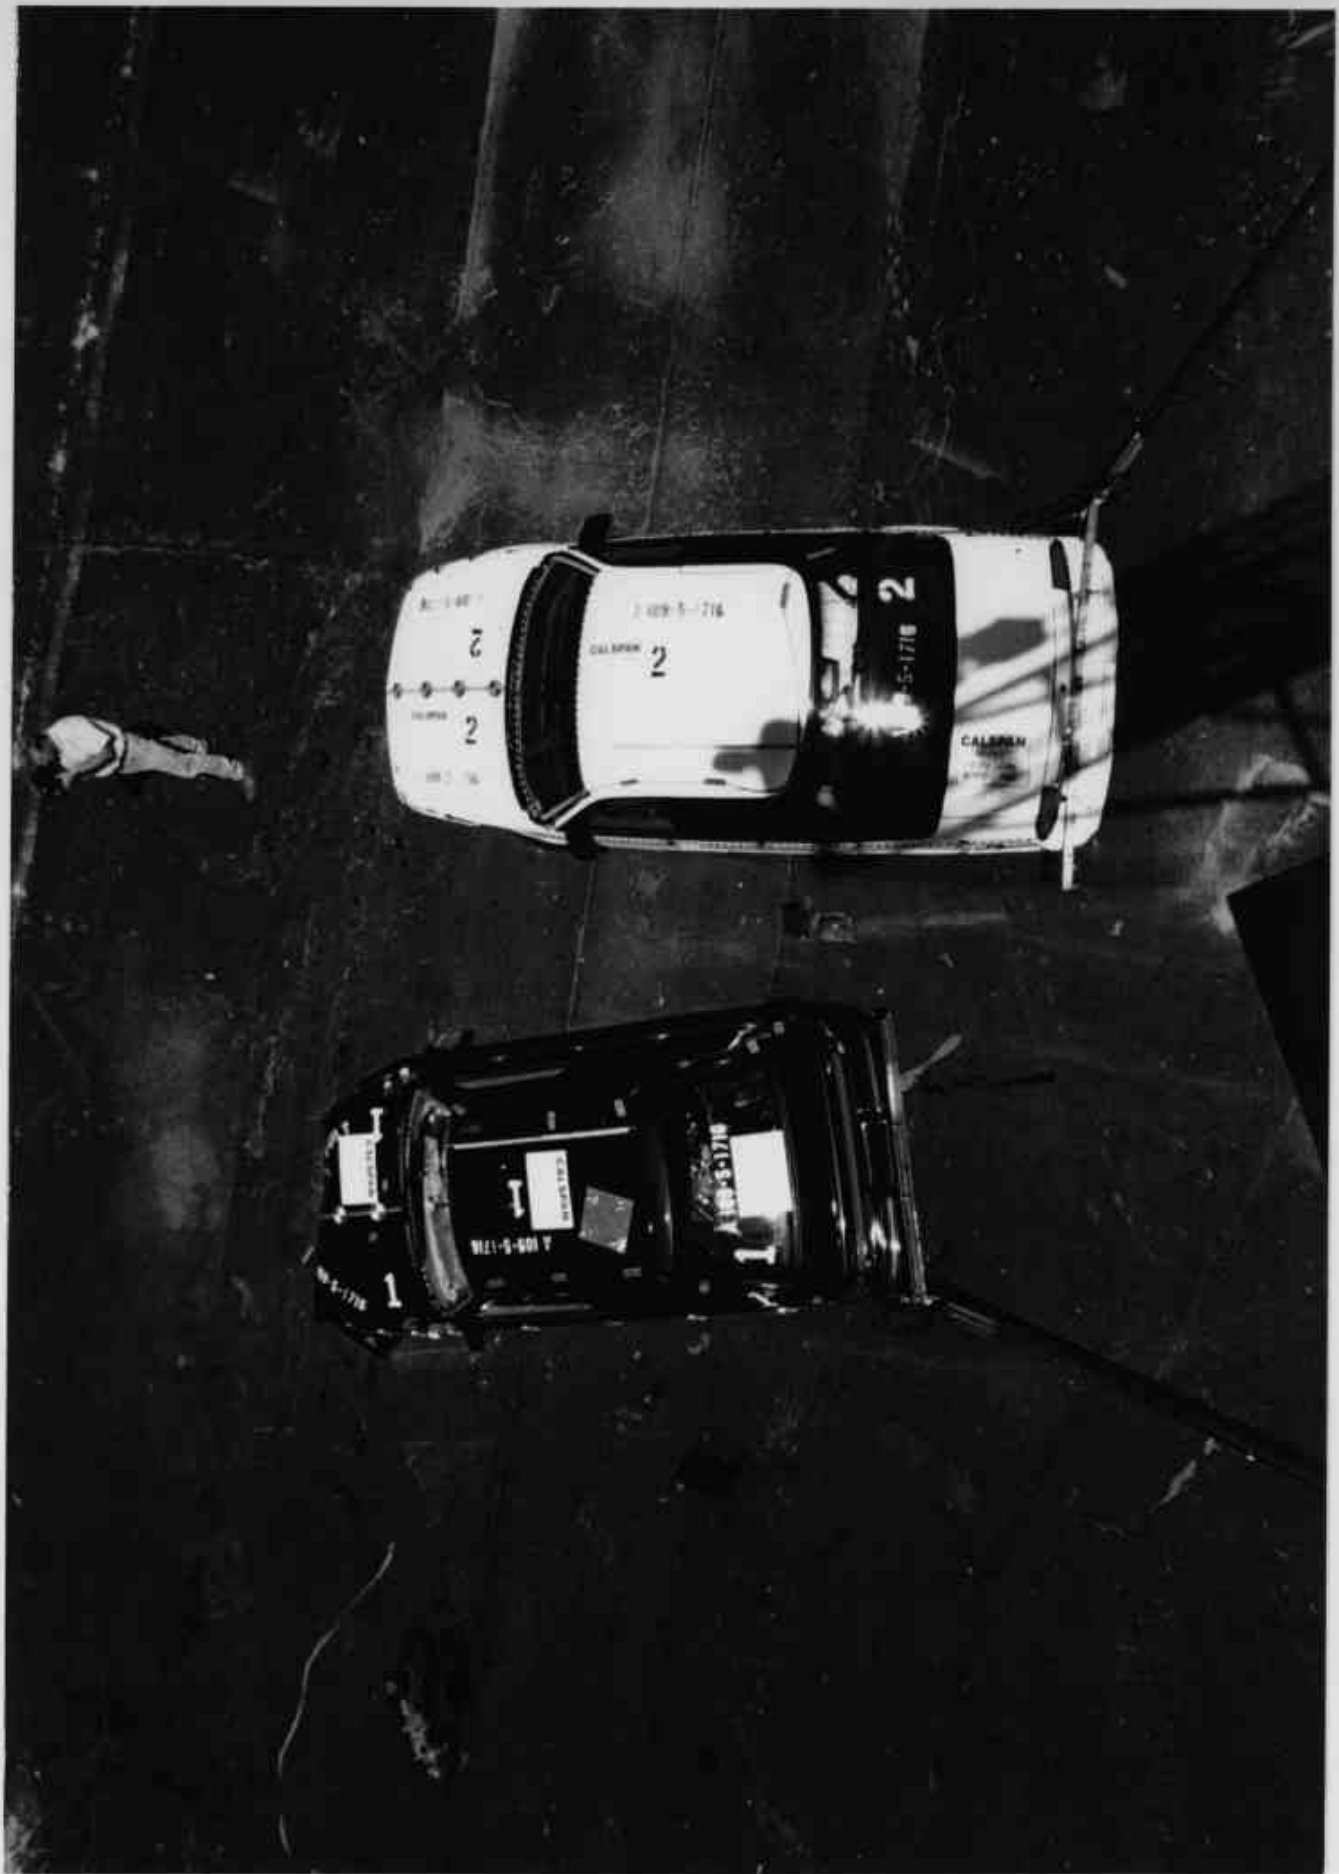


Figure A-2 POST-TEST OVERHEAD VIEW

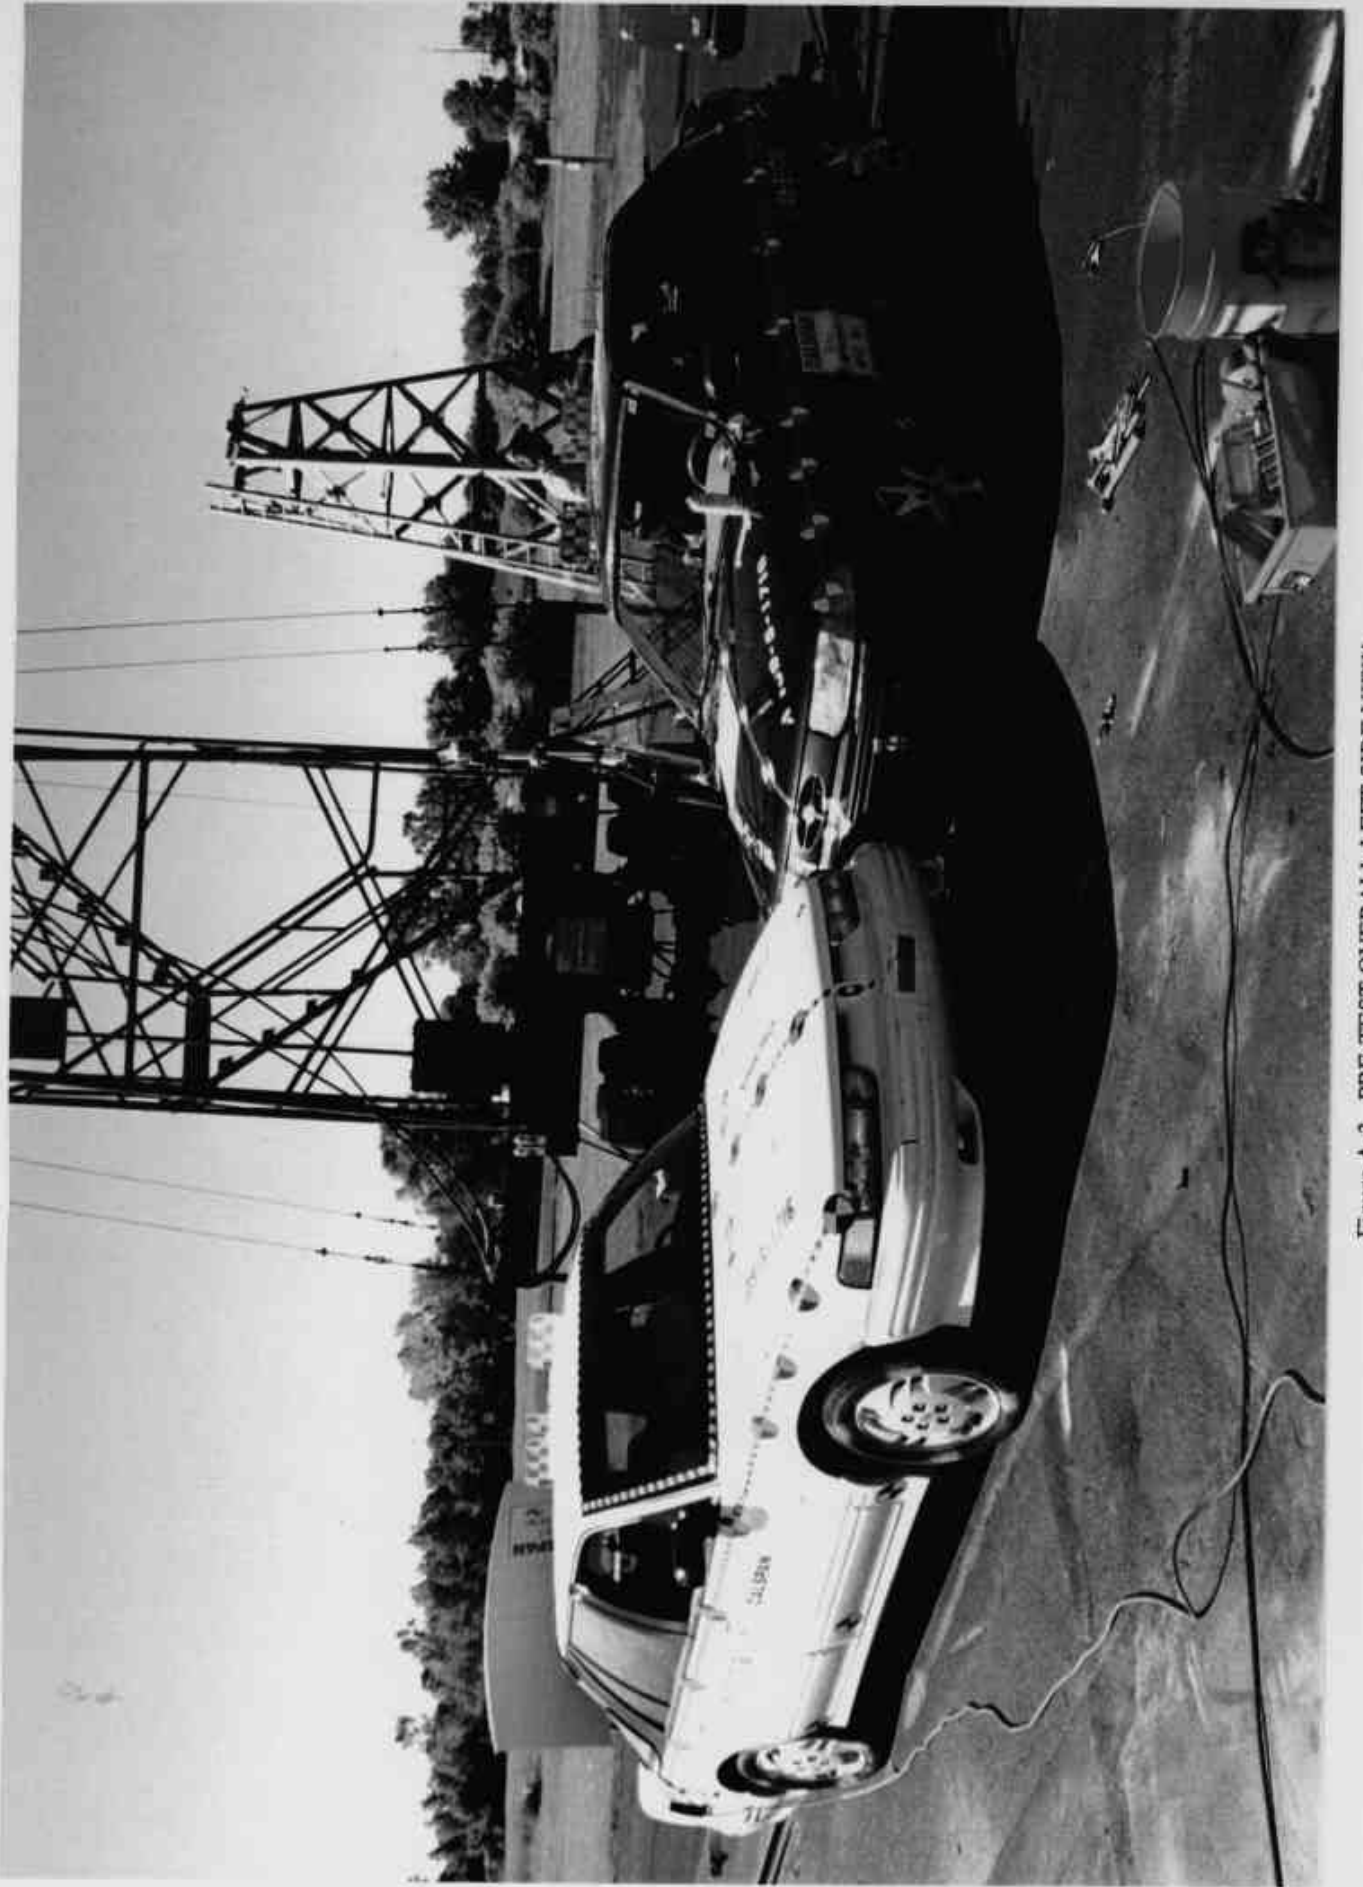


Figure A-3 PRE-TEST OVERALL LEFT SIDE VIEW

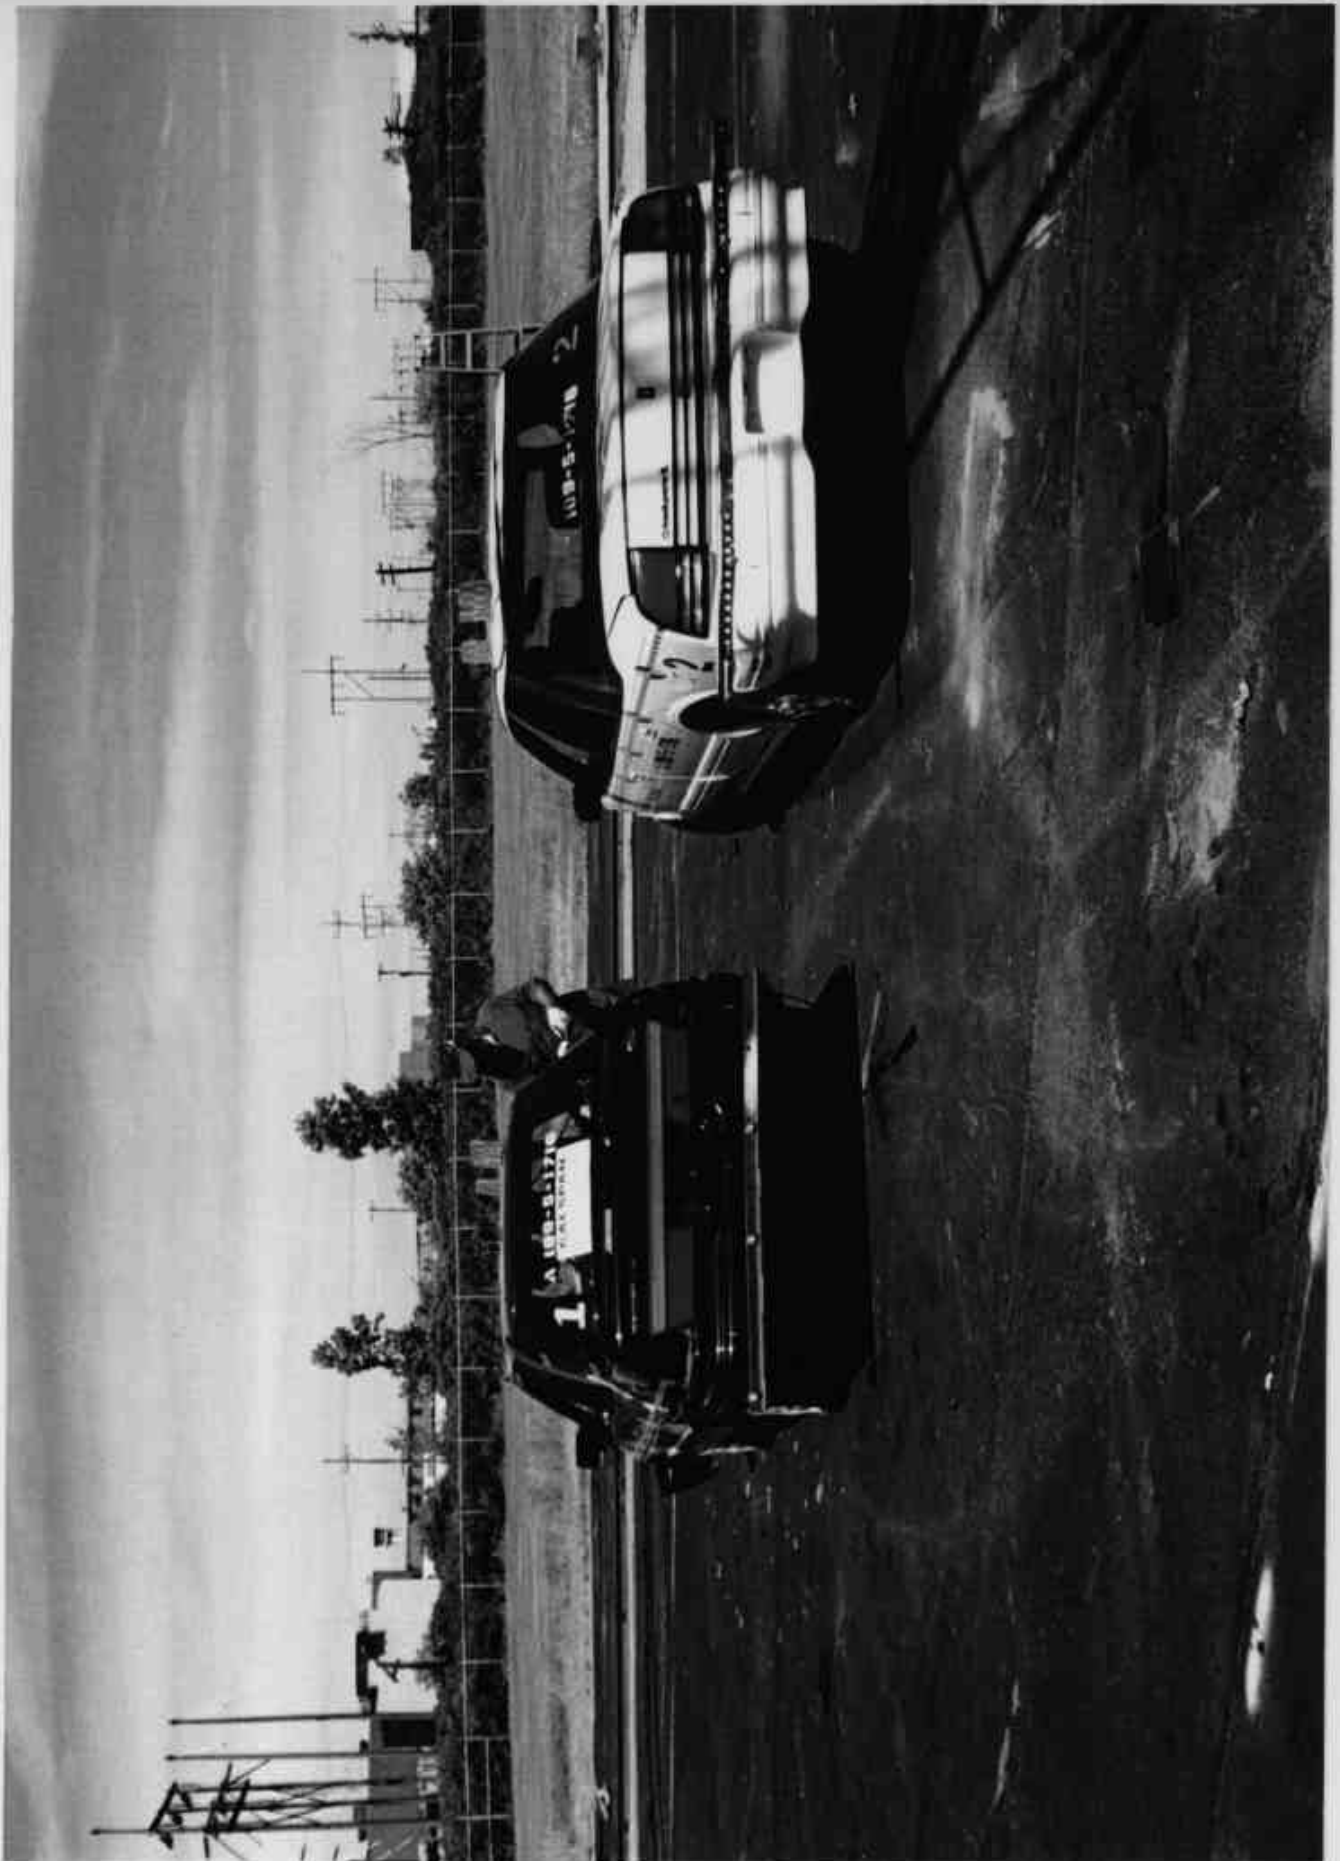


Figure A-4 POST-TEST OVERALL LEFT SIDE VIEW



Figure A-5 PRE-TEST OVERALL RIGHT SIDE VIEW

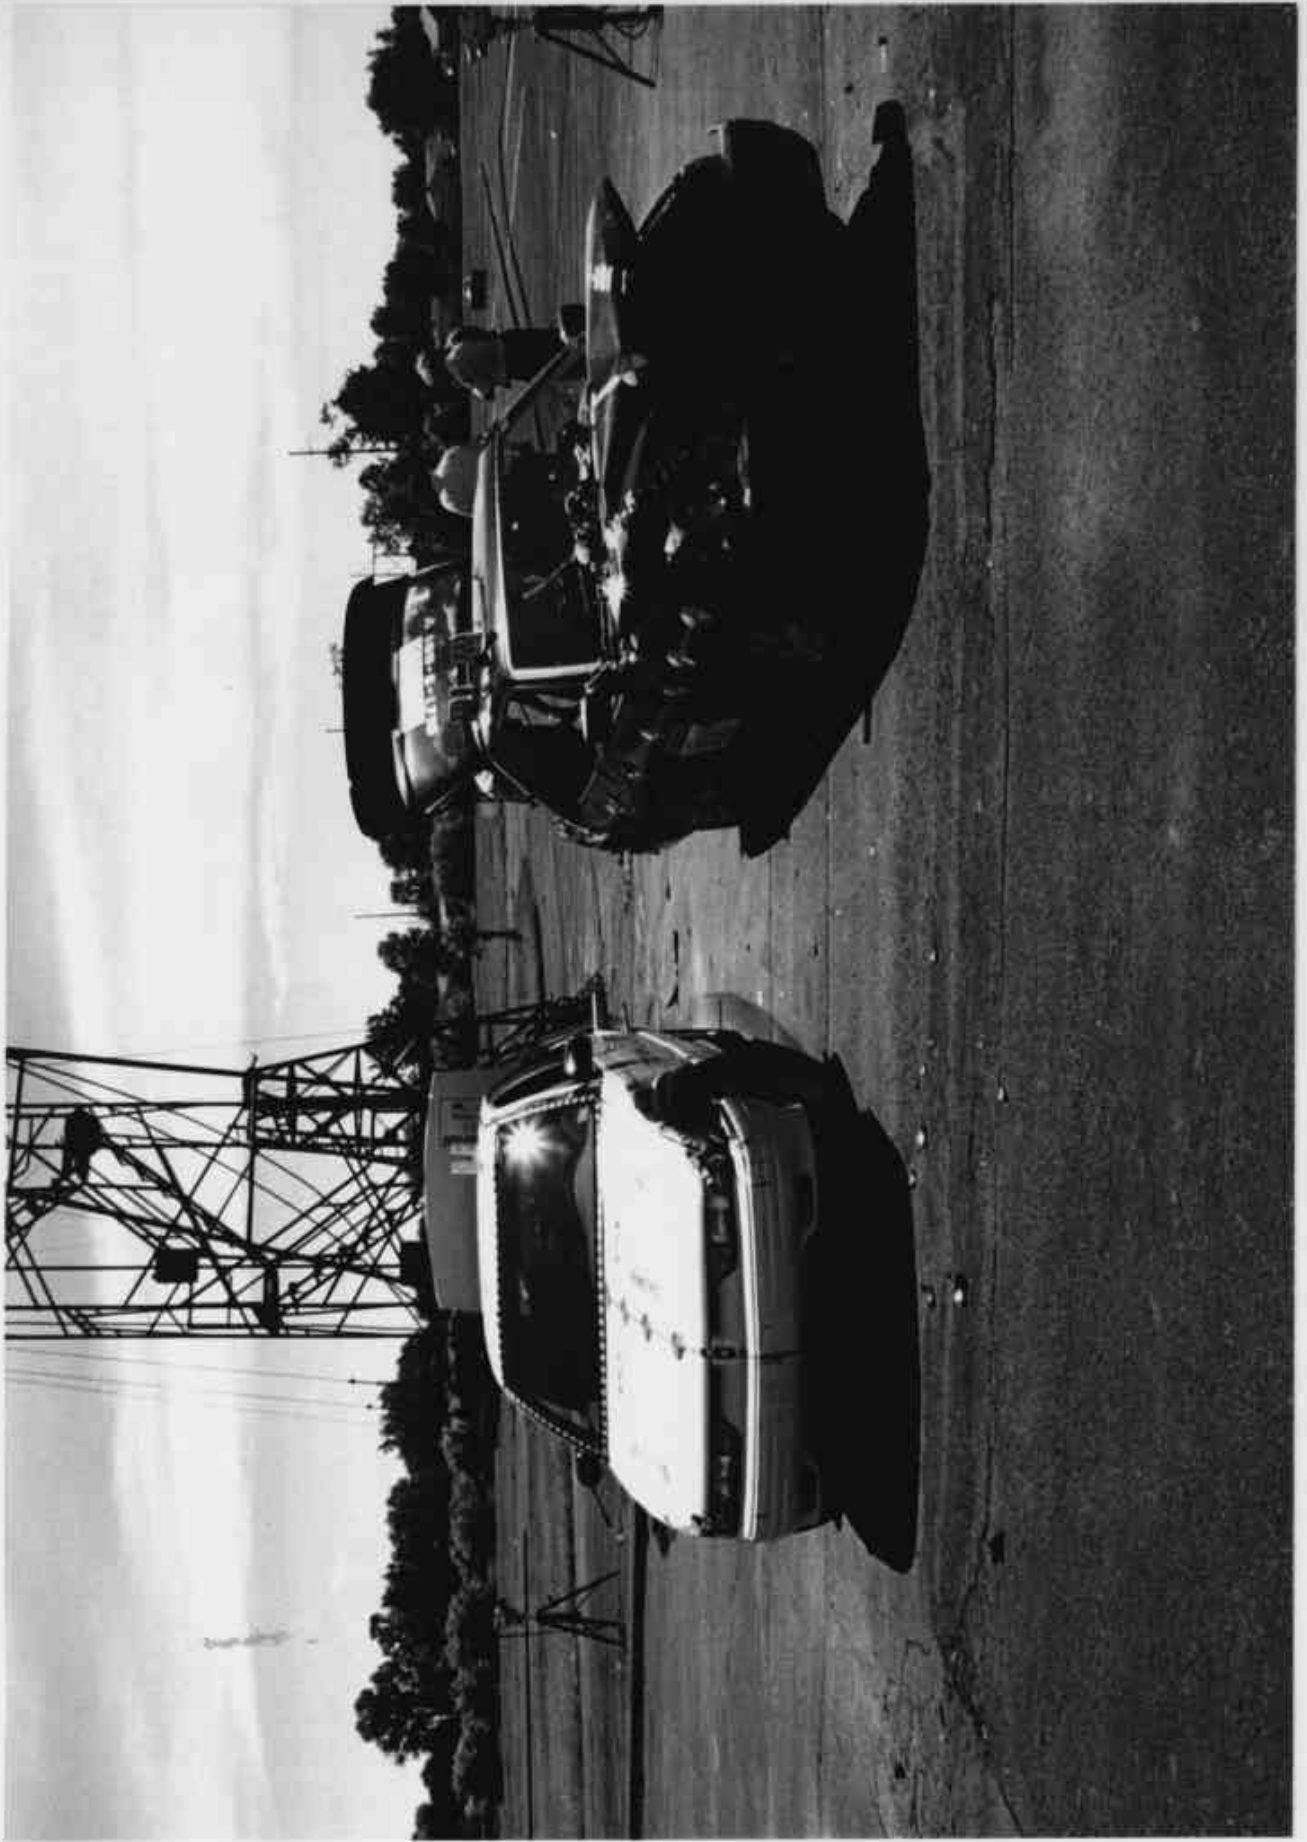


Figure A-6 POST-TEST OVERALL RIGHT SIDE VIEW



Figure A-7 IMPACT PHOTO #1



Figure A-8 IMPACT PHOTO #2

APPENDIX B

PHOTOGRAPHS: VEHICLE 1 AND OCCUPANT

APPENDIX B

TABLE OF CONTENTS

<u>Figure No.</u>	<u>Photograph Title</u>	<u>Page No.</u>
B-1	PRE-TEST FRONT VIEW	B-3
B-2	POST-TEST FRONT VIEW	B-4
B-3	PRE-TEST FRONT RIGHT THREE QUARTER VIEW	B-5
B-4	POST-TEST FRONT RIGHT THREE QUARTER VIEW	B-6
B-5	PRE-TEST RIGHT SIDE VIEW	B-7
B-6	POST-TEST RIGHT SIDE VIEW	B-8
B-7	PRE-TEST REAR RIGHT THREE QUARTER VIEW	B-9
B-8	POST-TEST REAR RIGHT THREE QUARTER VIEW	B-10
B-9	PRE-TEST REAR VIEW	B-11
B-10	POST-TEST REAR VIEW	B-12
B-11	PRE-TEST REAR LEFT THREE QUARTER VIEW	B-13
B-12	POST-TEST REAR LEFT THREE QUARTER VIEW	B-14
B-13	PRE-TEST LEFT SIDE VIEW	B-15
B-14	POST-TEST LEFT SIDE VIEW	B-16
B-15	PRE-TEST FRONT LEFT THREE QUARTER VIEW	B-17
B-16	POST-TEST FRONT LEFT THREE QUARTER VIEW	B-18
B-17	PRE-TEST WINDSHIELD VIEW	B-19
B-18	POST-TEST WINDSHIELD VIEW	B-20
B-19	PRE-TEST DRIVER SIDE VIEW	B-21
B-20	POST-TEST DRIVER SIDE VIEW	B-22
B-21	PRE-TEST DRIVER AND INTERIOR VIEW	B-23
B-22	POST-TEST DRIVER AND INTERIOR VIEW	B-24
B-23	PRE-TEST DRIVER INSIDE VIEW	B-25
B-24	POST-TEST DRIVER INSIDE VIEW	B-26
B-25	PRE-TEST PASSENGER SIDE VIEW	B-27
B-26	POST-TEST PASSENGER SIDE VIEW	B-28
B-27	PRE-TEST PASSENGER AND INTERIOR VIEW	B-29
B-28	POST-TEST PASSENGER AND INTERIOR VIEW	B-30
B-29	PRE-TEST PASSENGER INSIDE VIEW	B-31
B-30	POST-TEST PASSENGER INSIDE VIEW	B-32
B-31	POST-TEST DRIVER CHEST CONTACT POINT	B-33
B-32	POST-TEST DRIVER KNEE BOLSTER/TOE PAN	B-34
B-33	POST-TEST PASSENGER CHEST CONTACT POINT	B-35
B-34	POST-TEST PASSENGER KNEE BOLSTER/TOE PAN	B-36
B-35	POST-TEST TOP VIEW	B-37
B-36	CERTIFICATION PLACARD	B-38



Figure B-1 PRE-TEST FRONT VIEW



Figure B-2 POST-TEST FRONT VIEW

B-4

8404-5



Figure B-3 PRE-TEST FRONT RIGHT THREE QUARTER VIEW

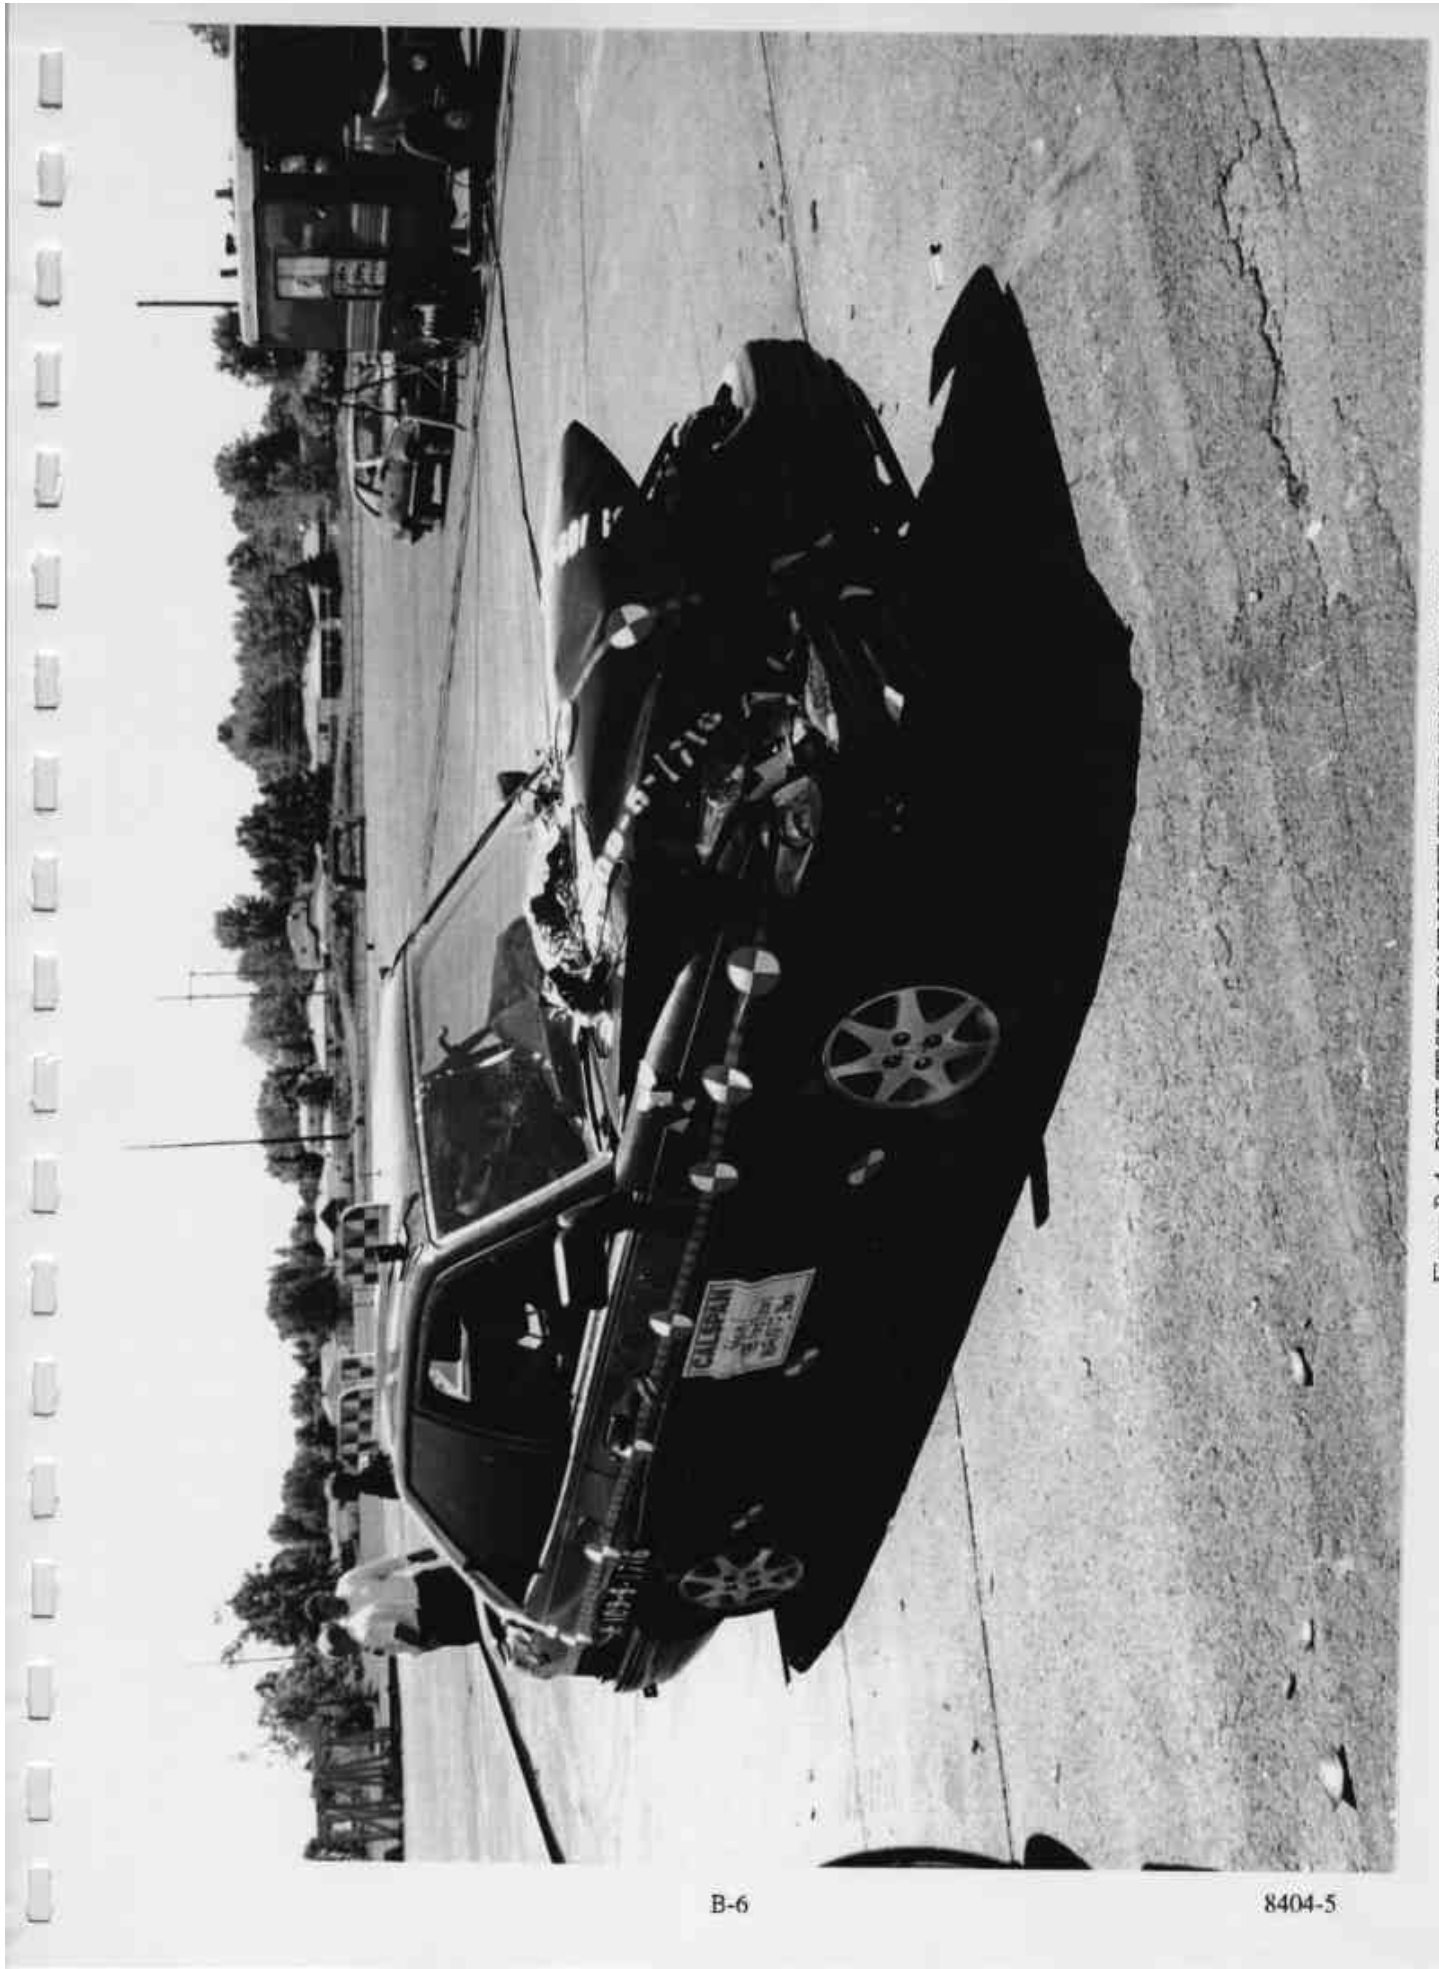


Figure B-4 POST-TEST FRONT RIGHT THREE QUARTER VIEW

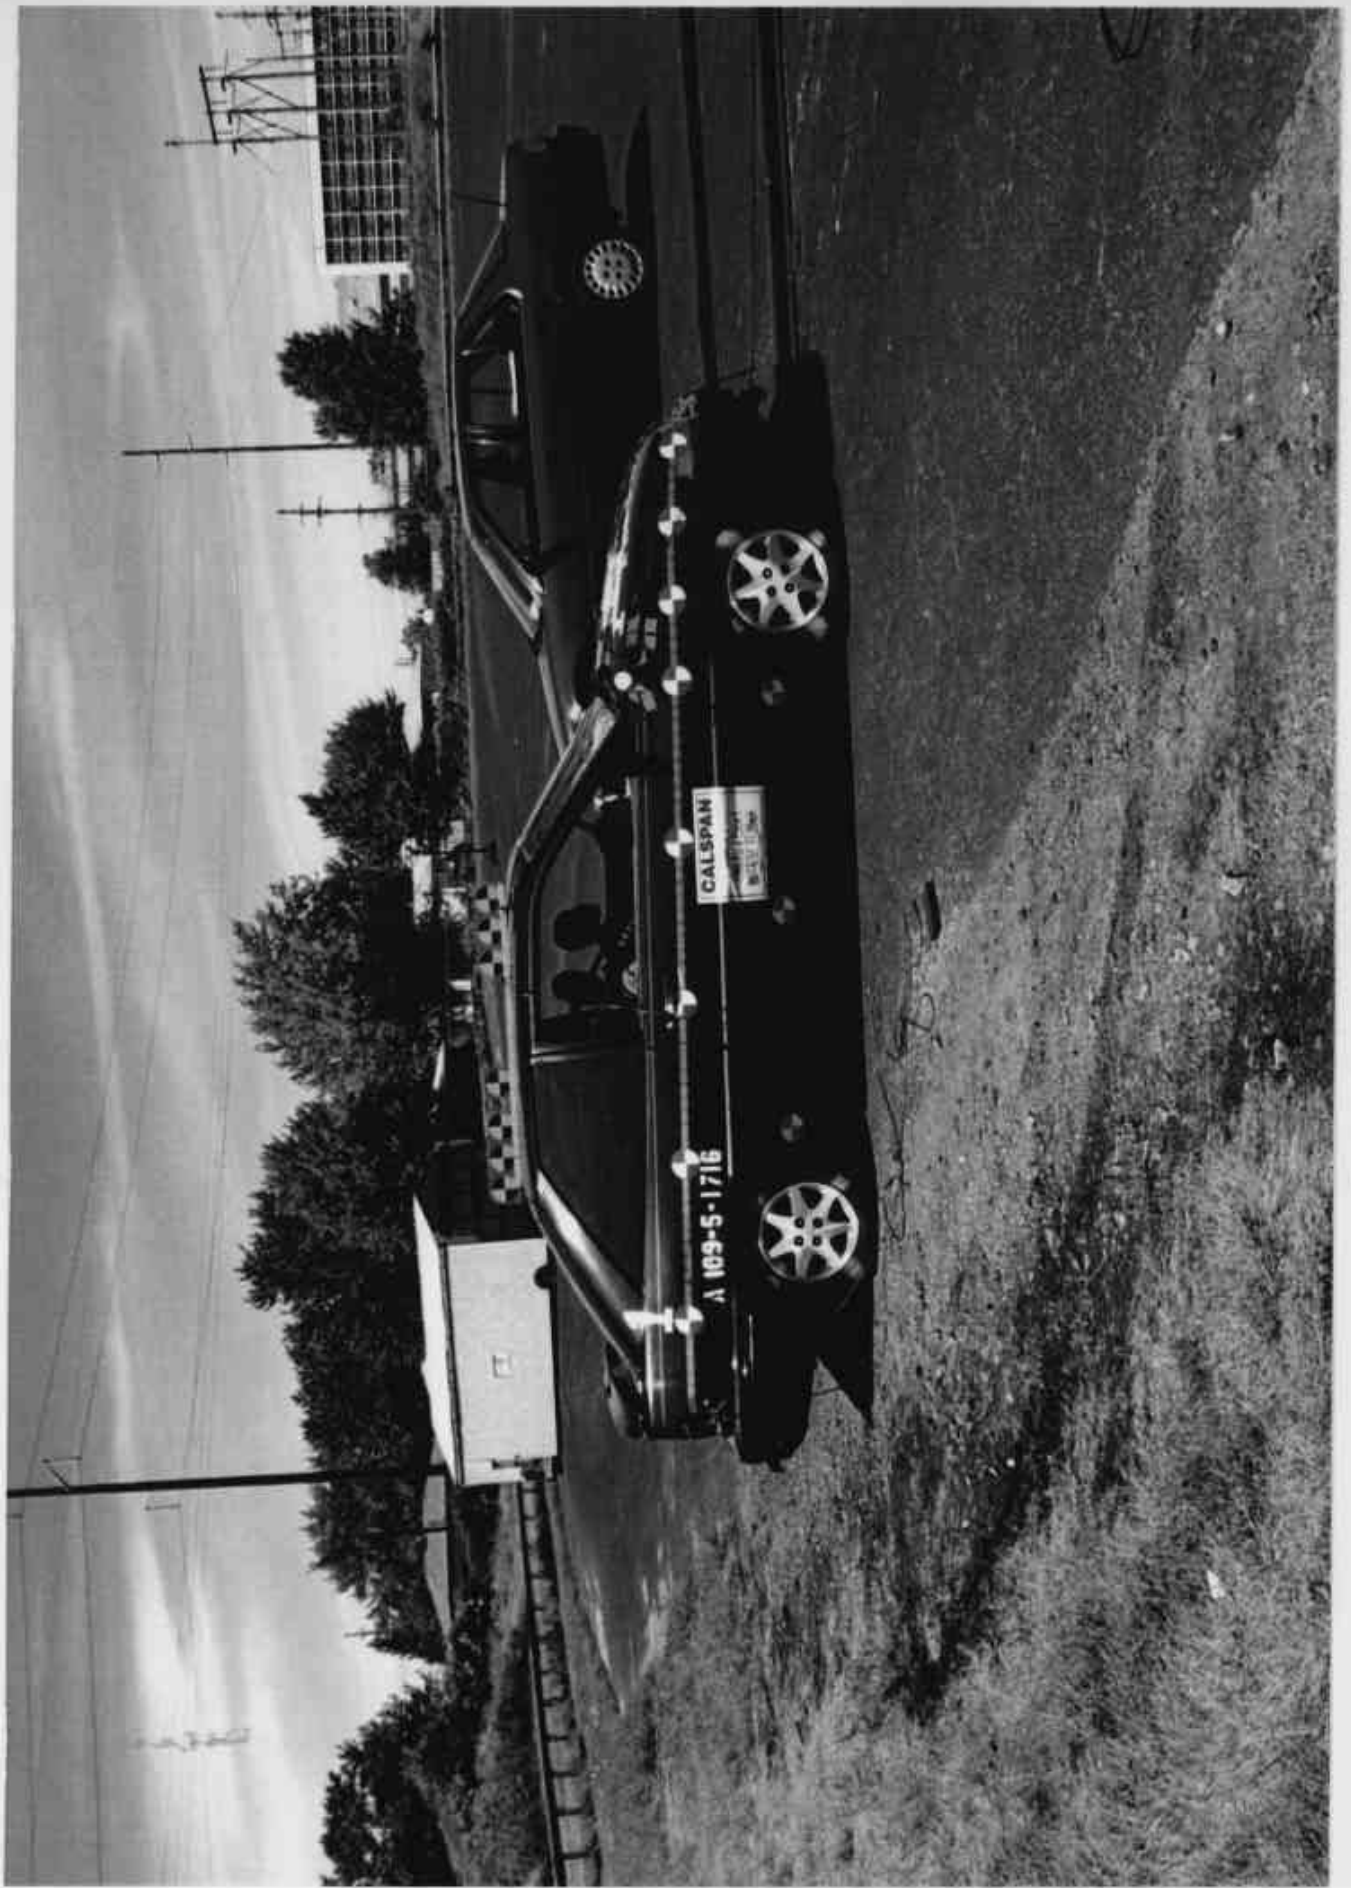


Figure B-5 PRE-TEST RIGHT SIDE VIEW

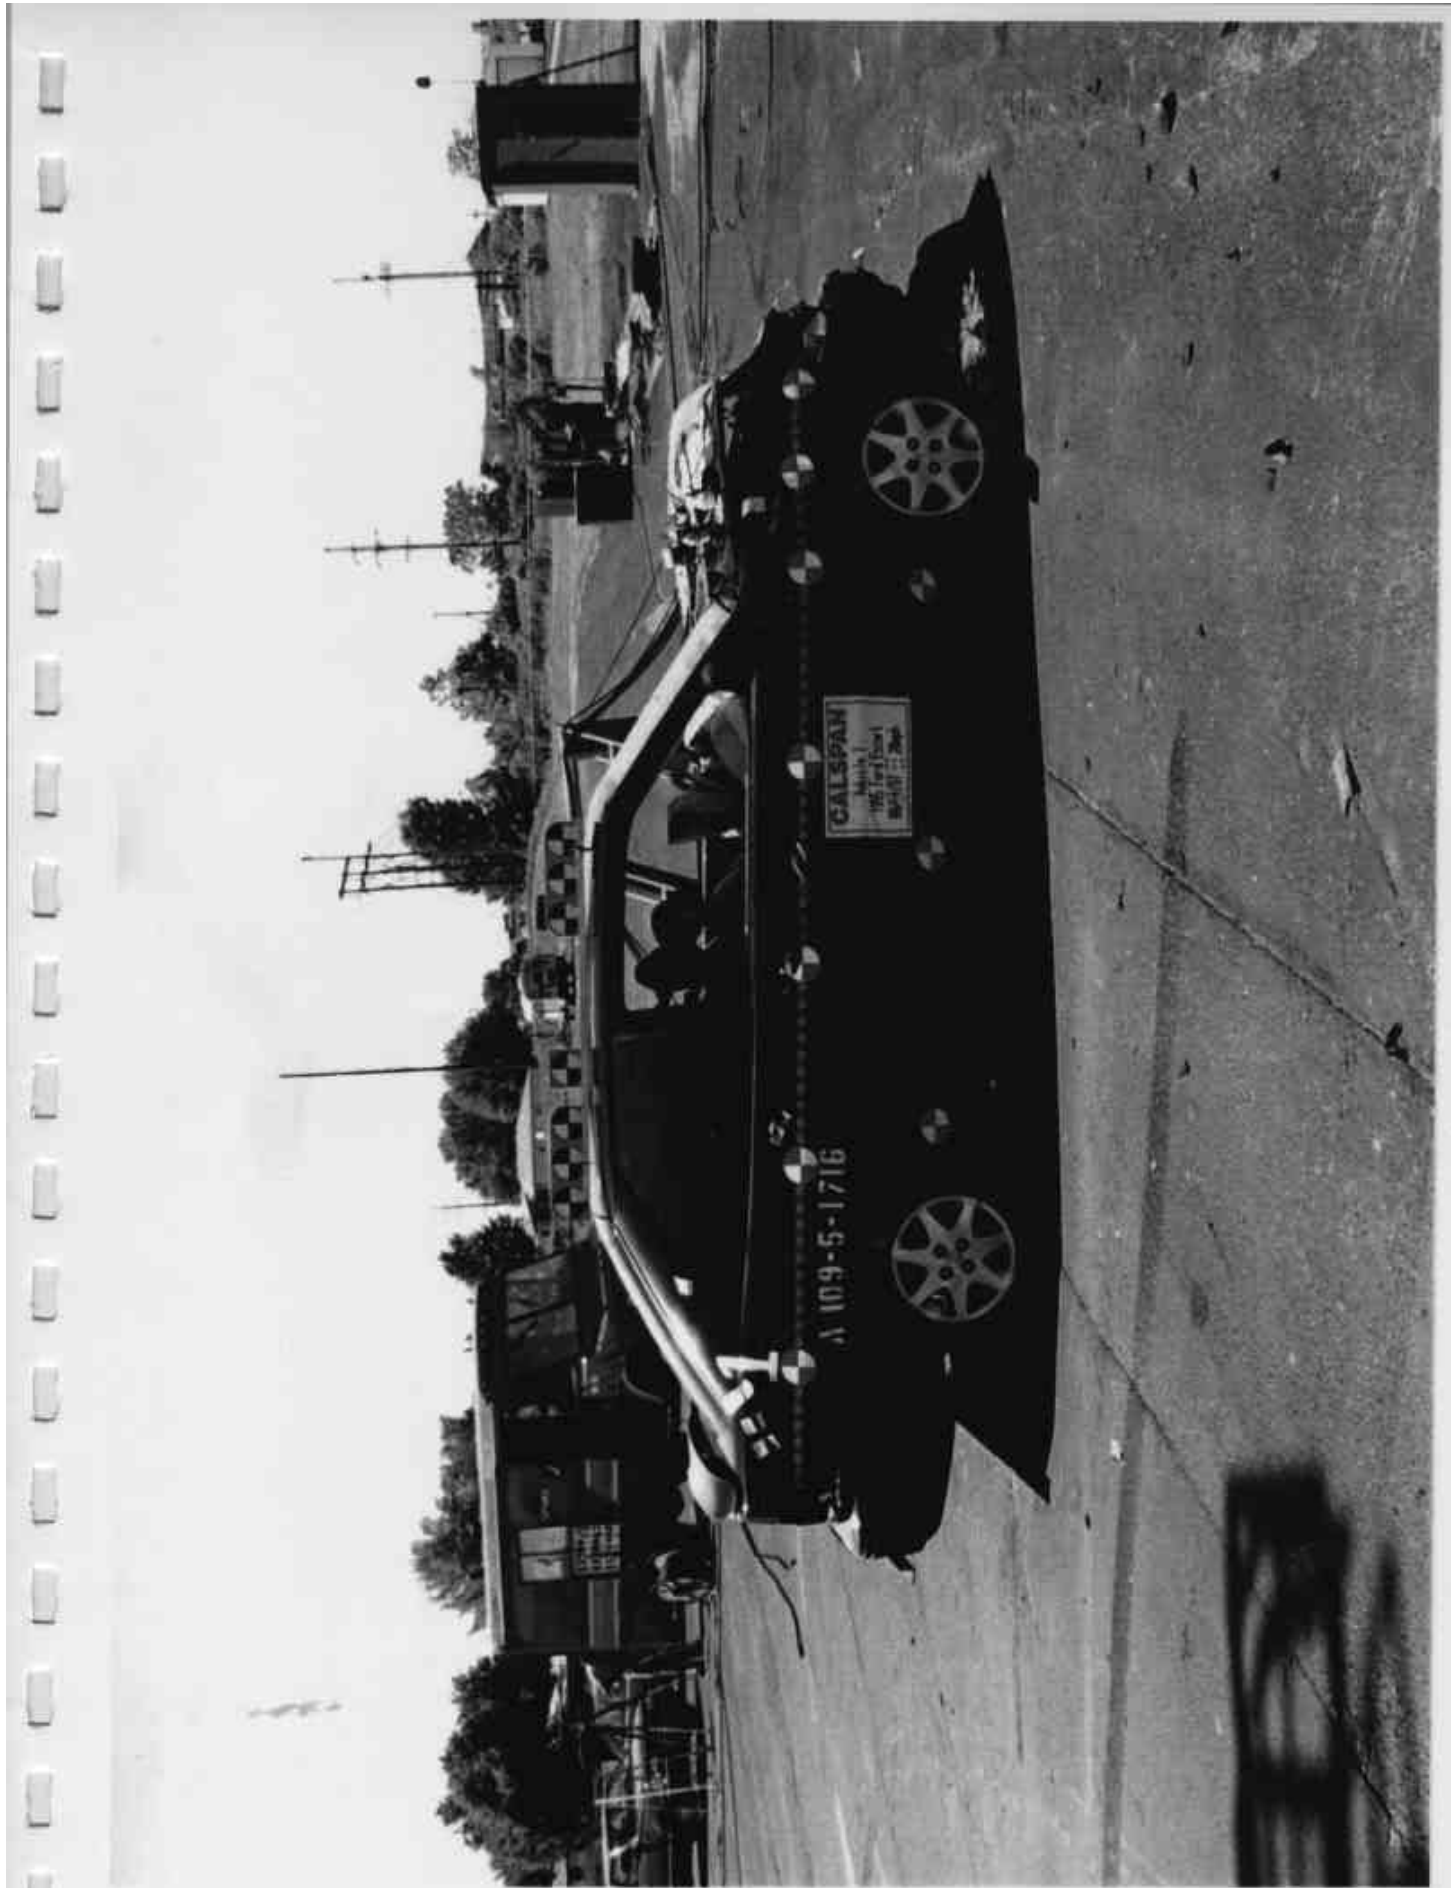


Figure B-6 POST-TEST RIGHT SIDE VIEW



Figure B-7 PRE-TEST REAR RIGHT THREE QUARTER VIEW

PHOTOGRAPH NOT AVAILABLE

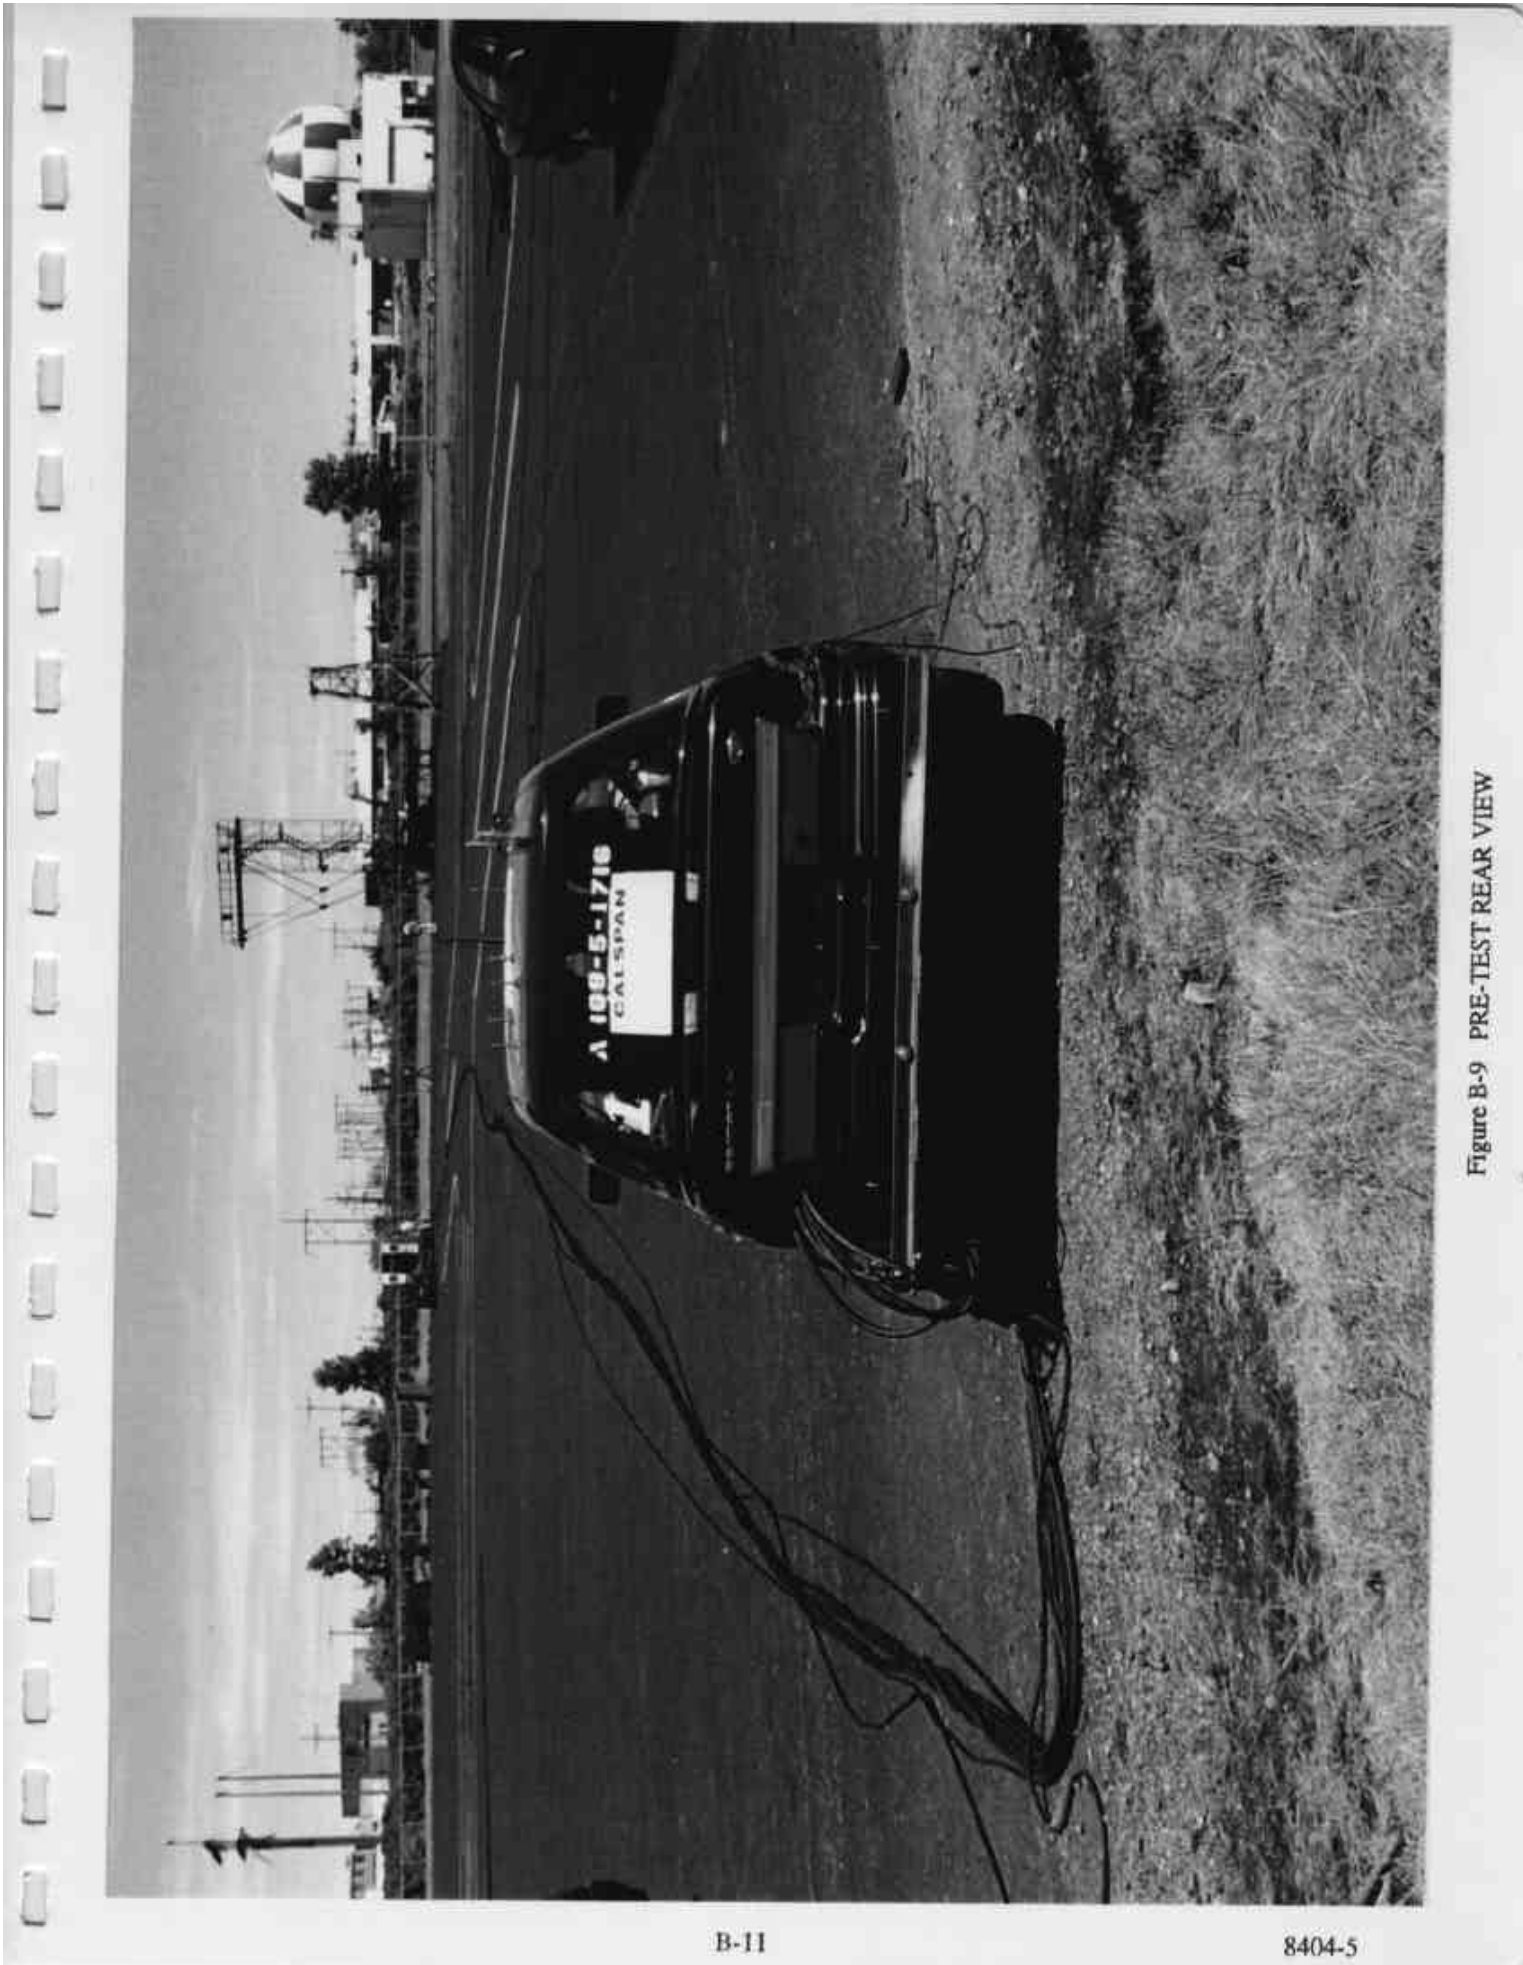


Figure B-9 PRE-TEST REAR VIEW



Figure B-10 POST-TEST REAR VIEW



Figure B-11 PRE-TEST REAR LEFT THREE QUARTER VIEW



Figure B-12 POST-TEST REAR LEFT THREE QUARTER VIEW

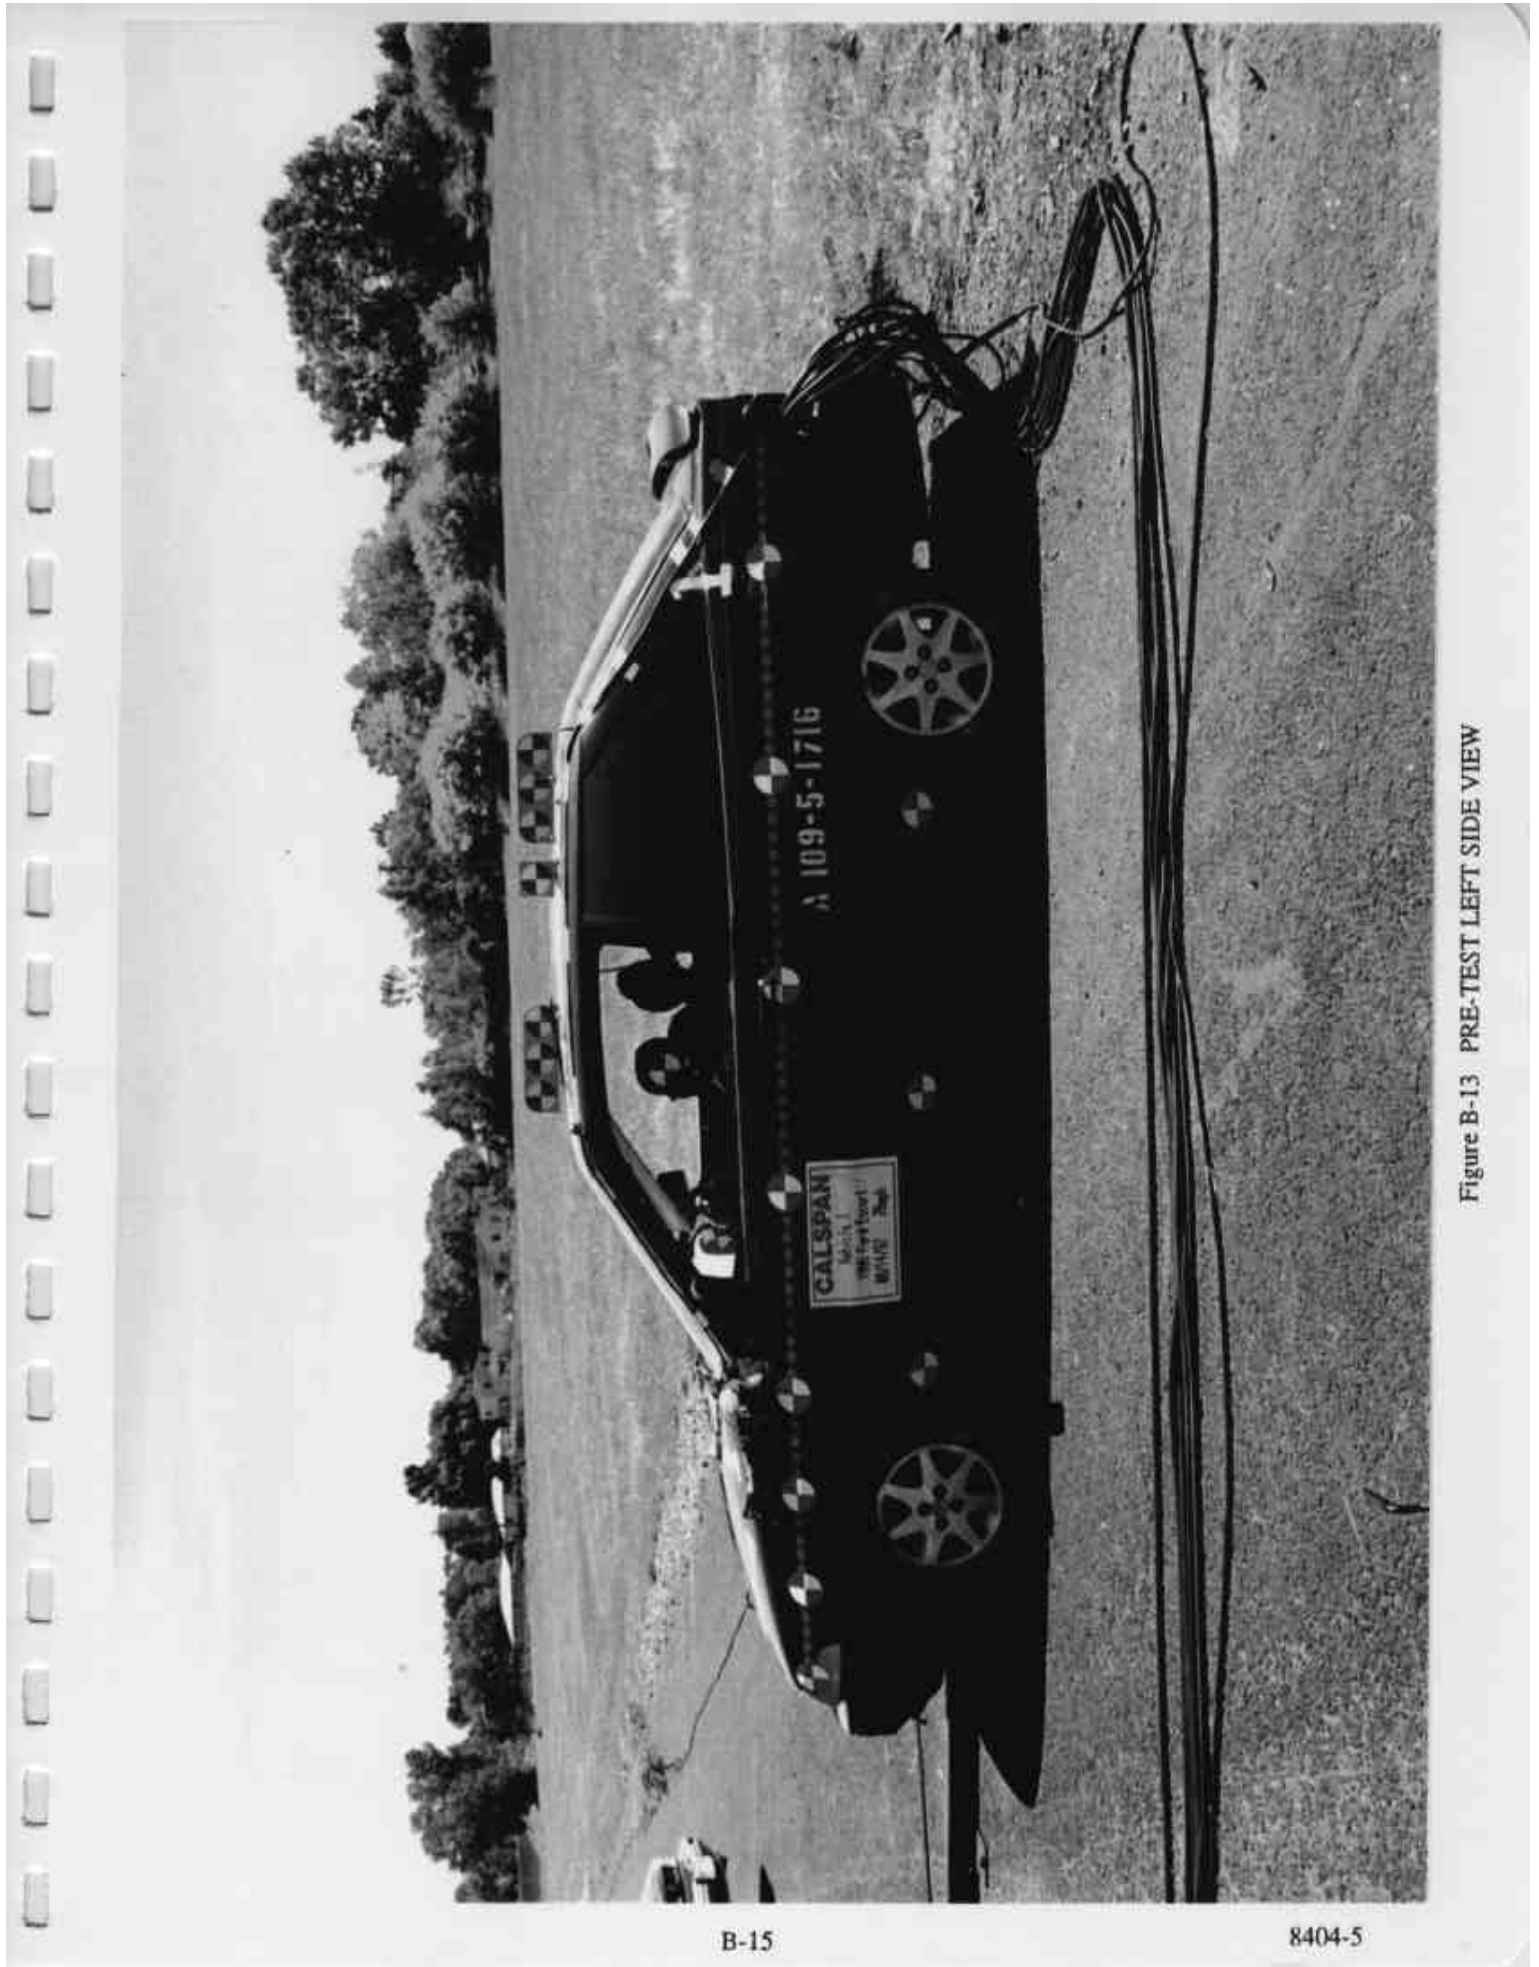


Figure B-13 PRE-TEST LEFT SIDE VIEW



Figure B-14 POST-TEST LEFT SIDE VIEW

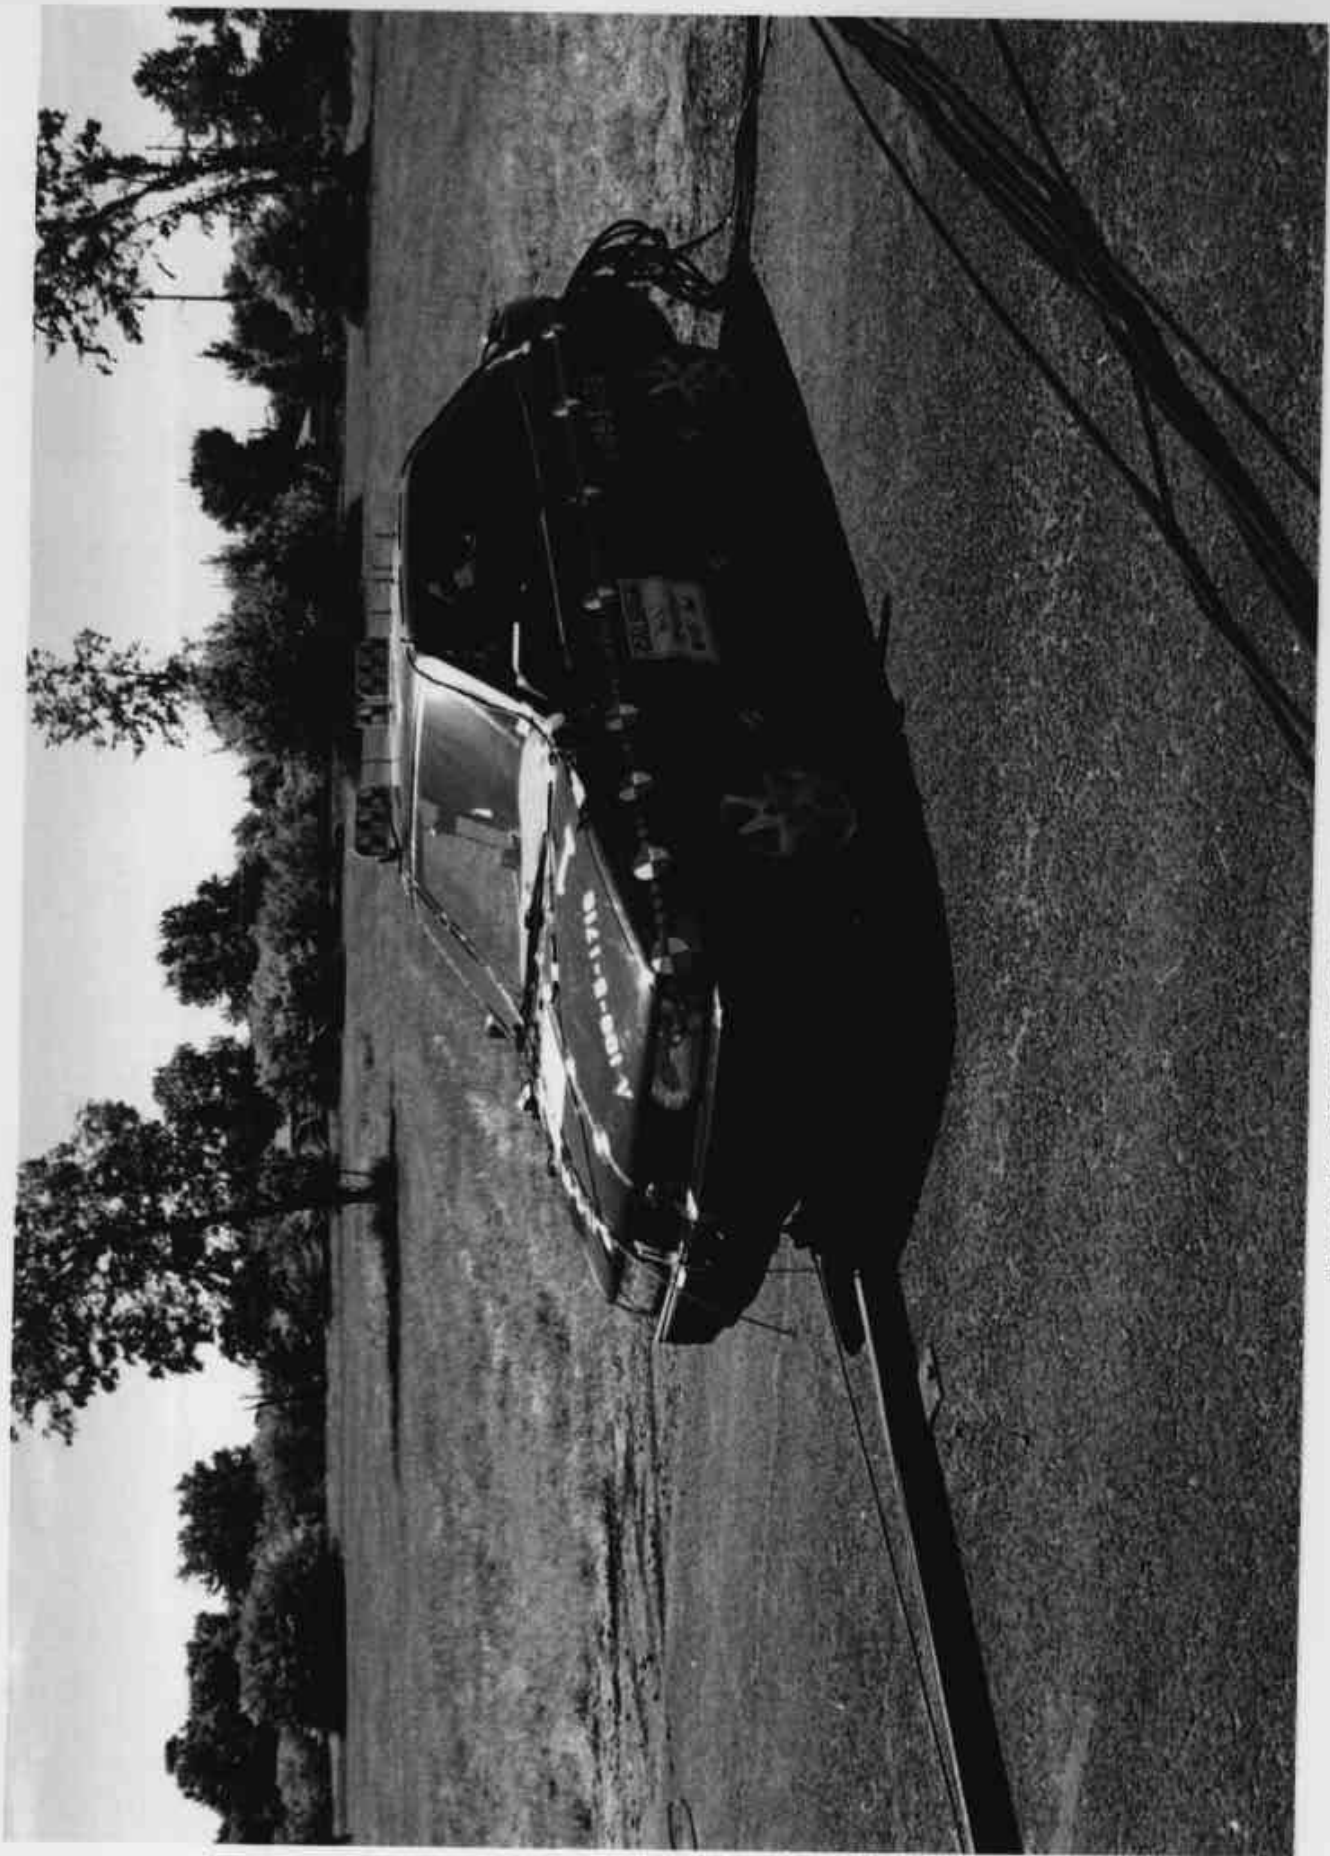


Figure B-15 PRE-TEST FRONT LEFT THREE QUARTER VIEW



Figure B-16 POST-TEST FRONT LEFT THREE QUARTER VIEW

B-18

8404-5

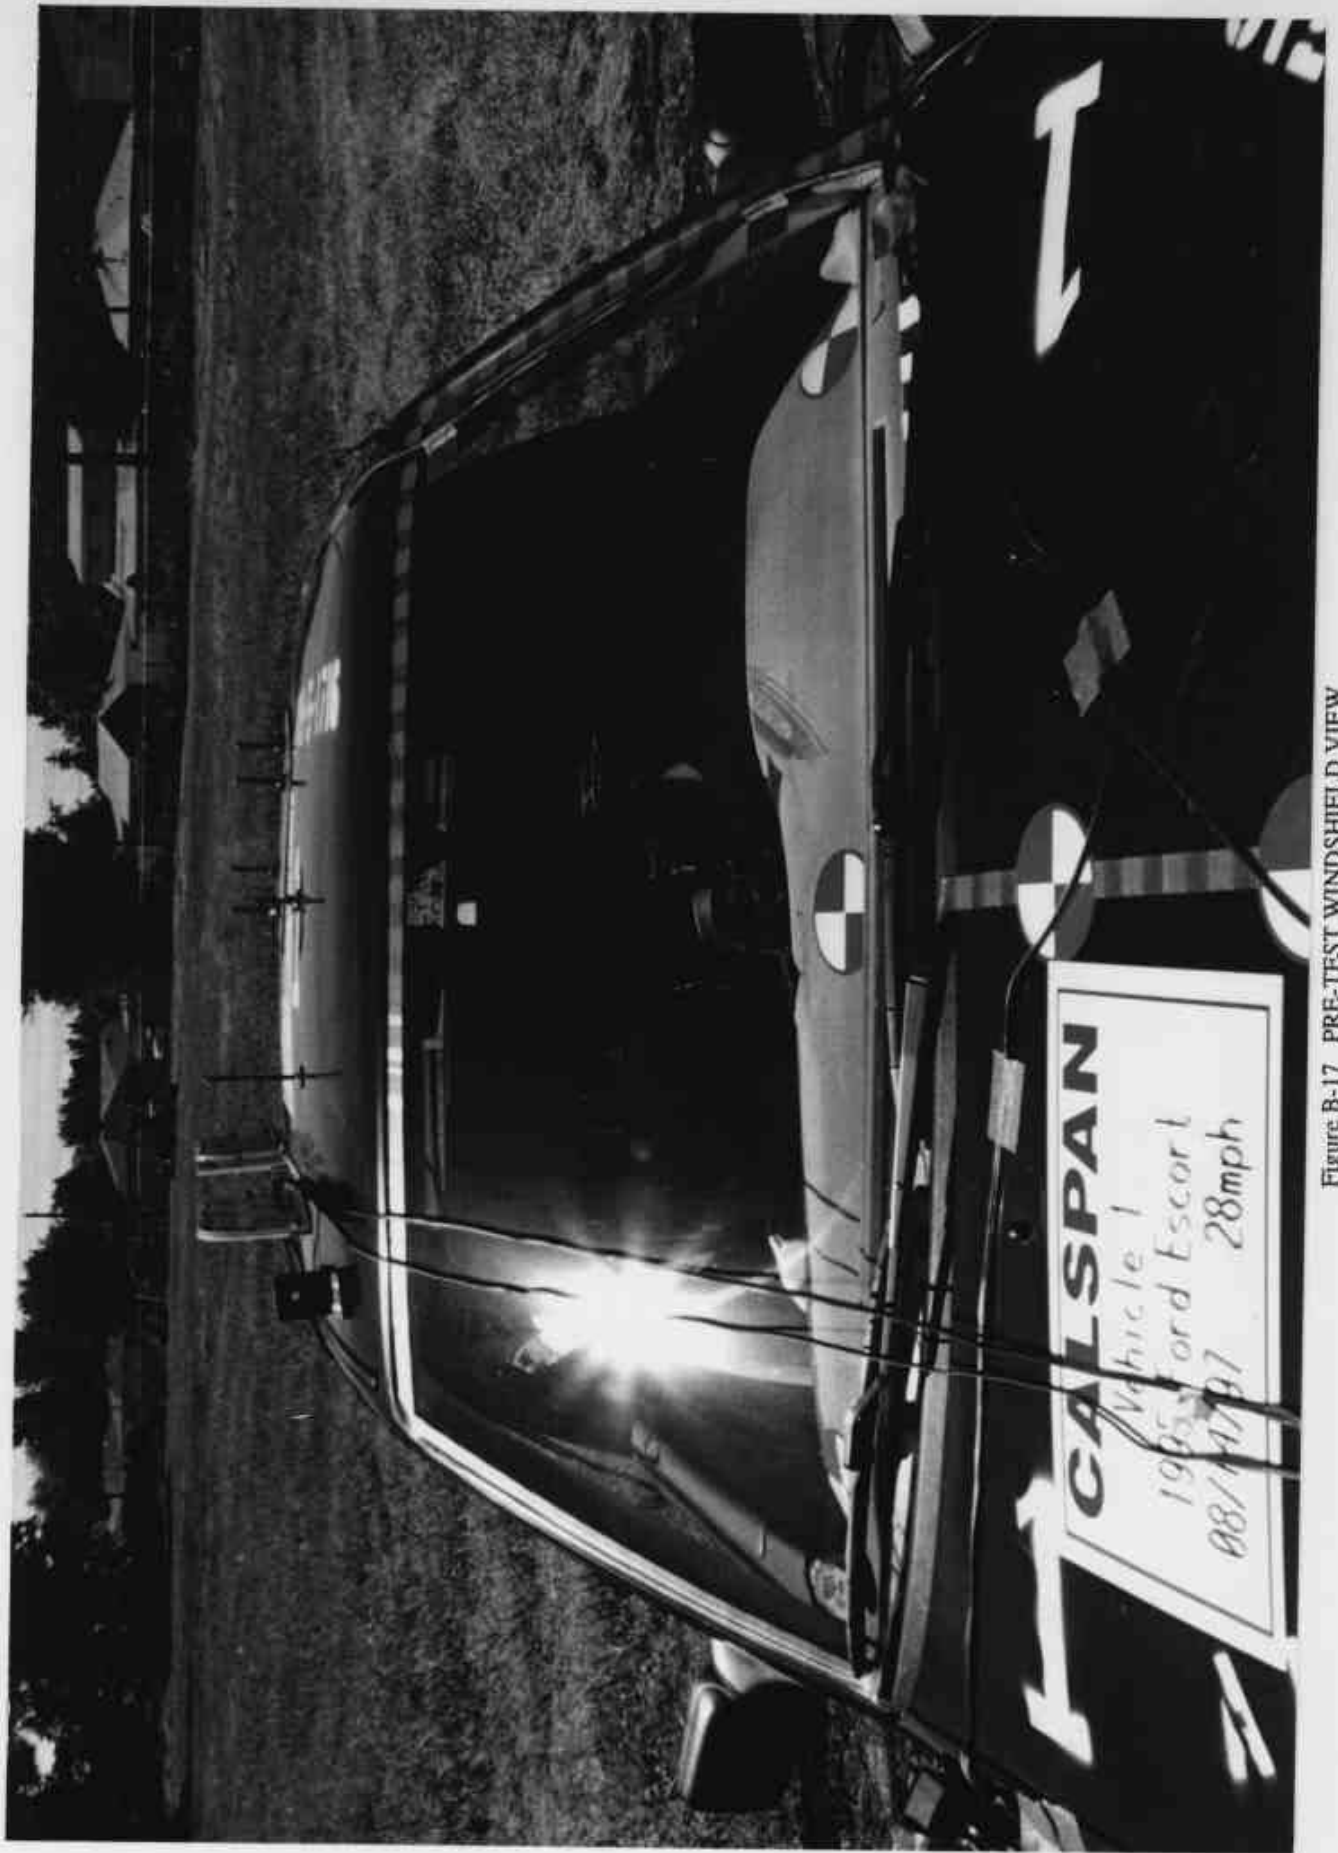


Figure B-17 PRE-TEST WINDSHIELD VIEW

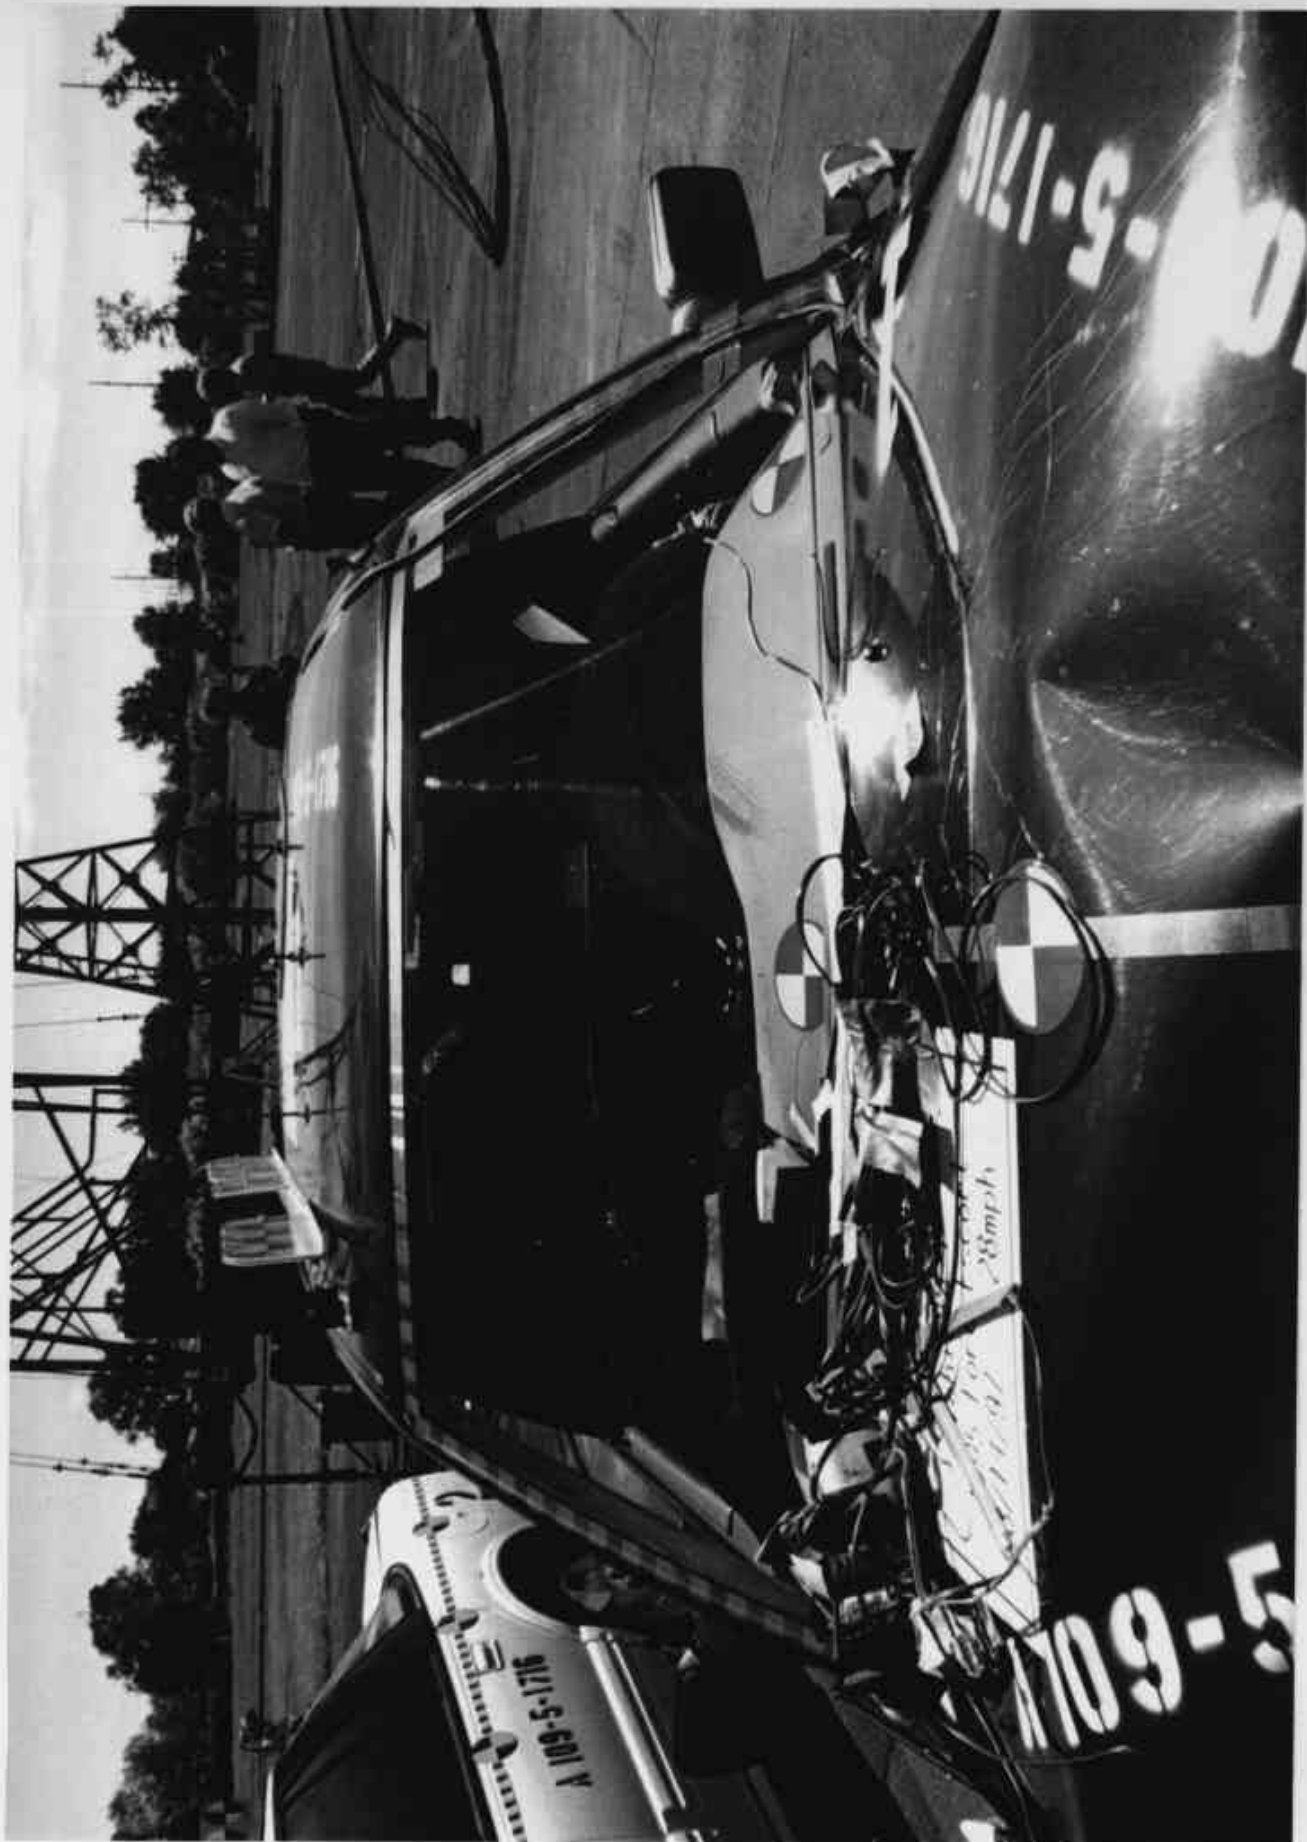


Figure B-18 POST-TEST WINDSHIELD VIEW



B-21

8404-5

Figure B-19 PRE-TEST DRIVER SIDE VIEW



B-22

8404-5

Figure B-20 POST-TEST DRIVER SIDE VIEW



Figure B-21 PRE-TEST DRIVER AND INTERIOR VIEW



Figure B-22 POST-TEST DRIVER AND INTERIOR VIEW



Figure B-23 PRE-TEST DRIVER INSIDE VIEW




Figure B-24 POST-TEST DRIVER INSIDE VIEW



B-27

8404-5

Figure B-25 PRE-TEST PASSENGER SIDE VIEW

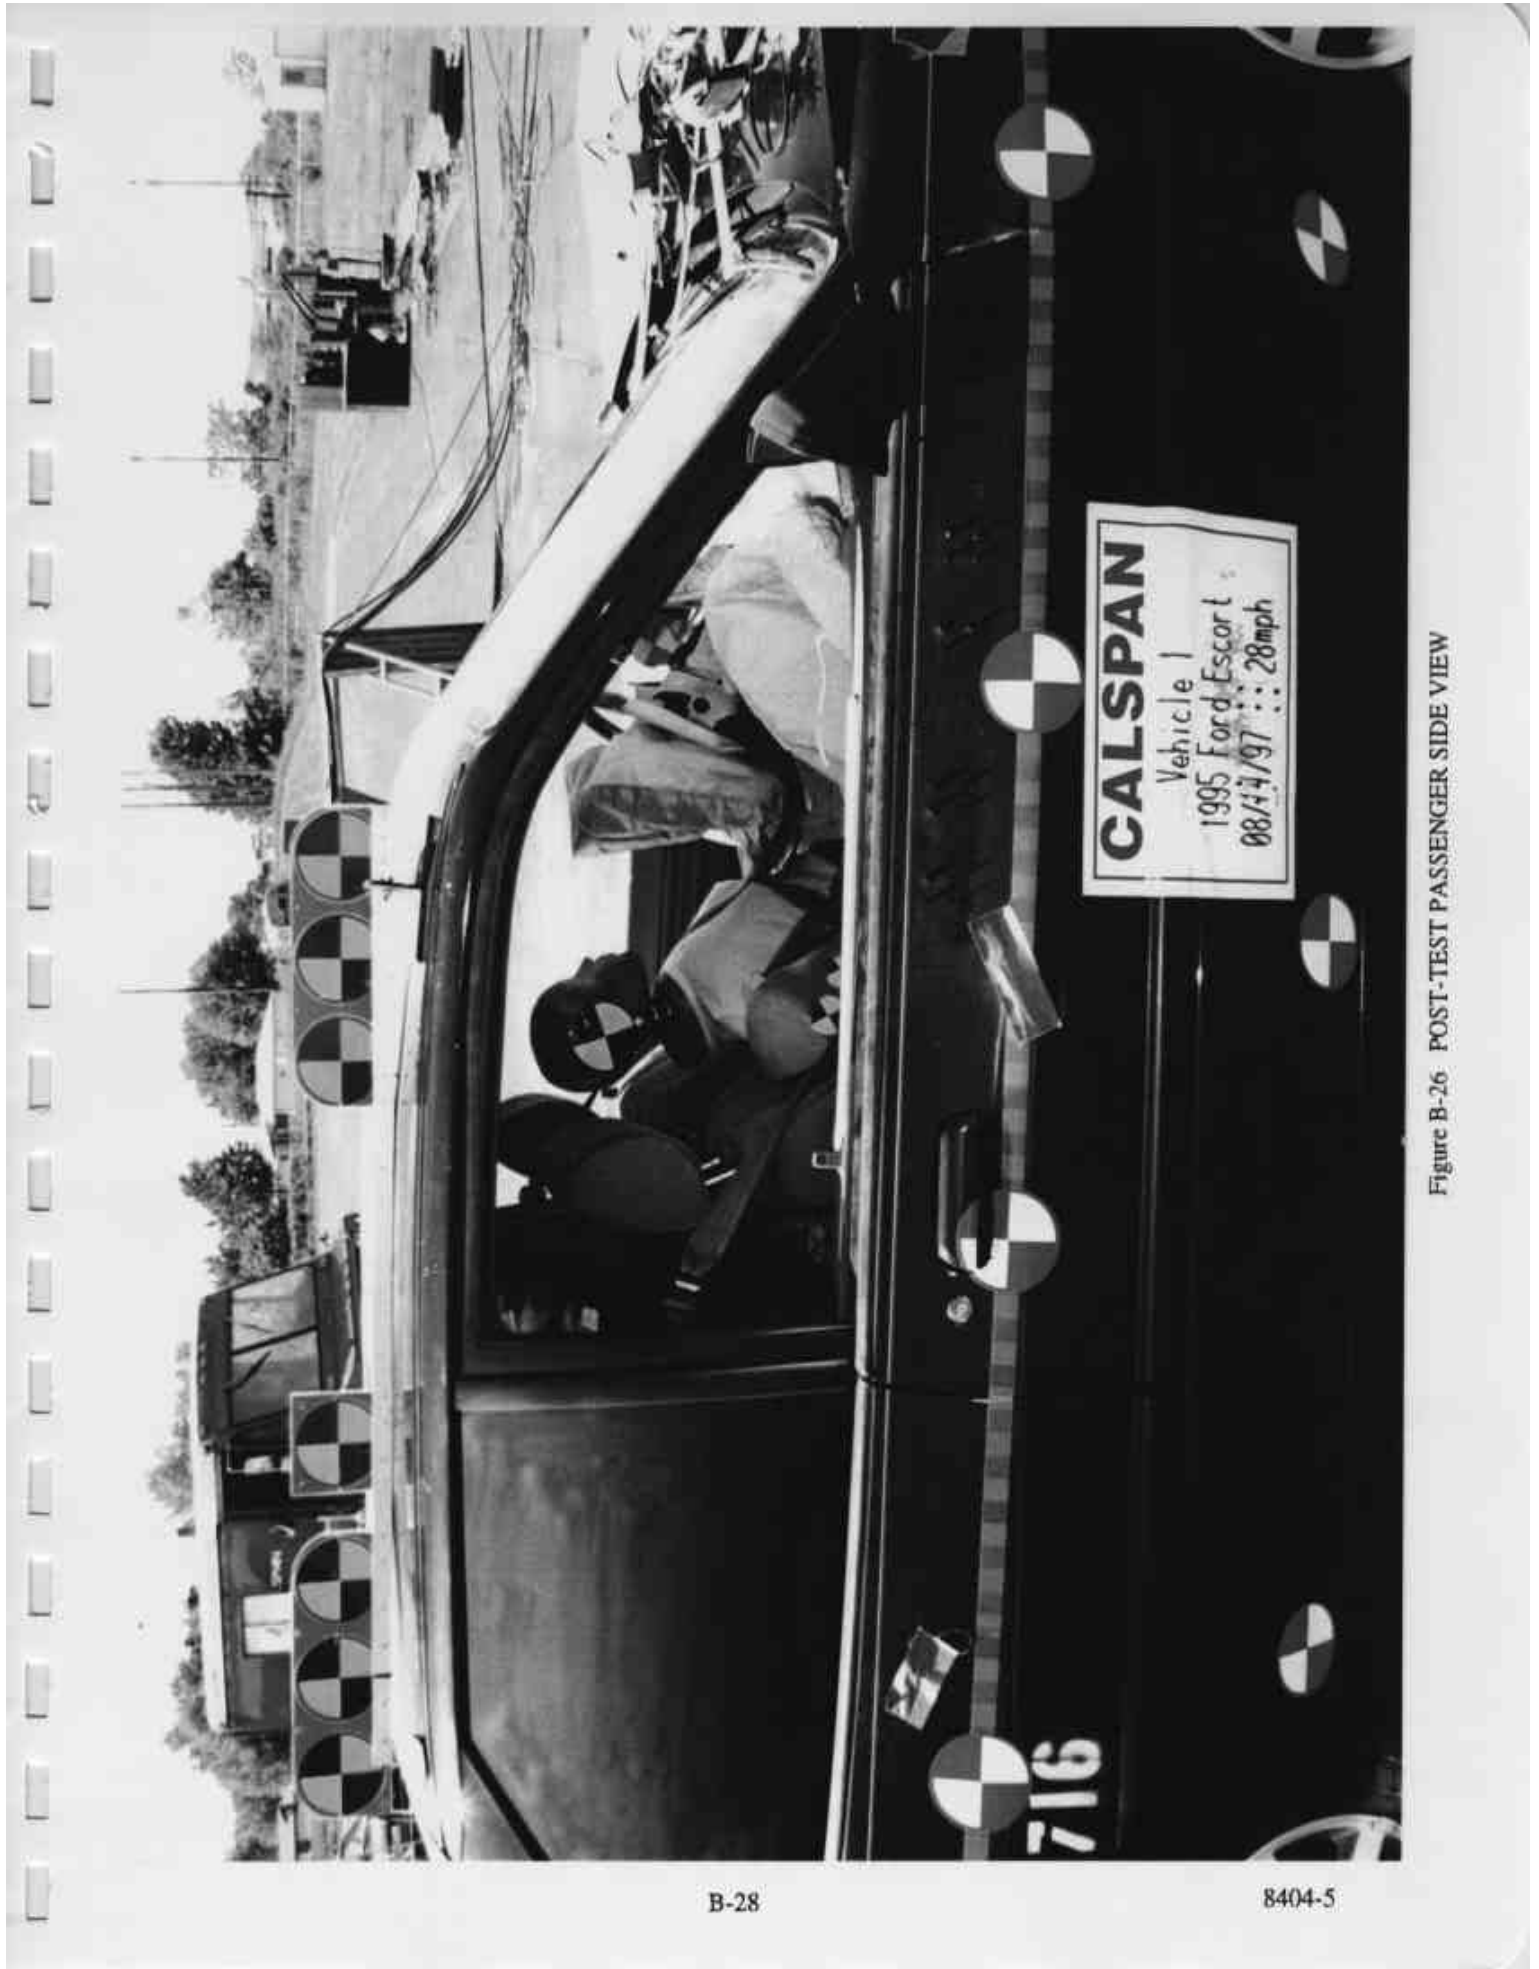

B-28

8404-5

Figure B-26 POST-TEST PASSENGER SIDE VIEW



Figure B-27 PHOTOGRAPH OF TEST PASSENGER AND INTERIOR VIEW



Figure B-28 POST-TEST PASSENGER AND INTERIOR VIEW



Figure B-29 PRE-TEST PASSENGER INSIDE VIEW



Figure B-30 POST-TEST PASSENGER INSIDE VIEW



Figure B-31 POST-TEST DRIVER FACE/CHEST CONTACT POINT



Figure B-32 POST-TEST PASSENGER FACE/CHEST CONTACT POINT

PHOTOGRAPH NOT AVAILABLE



CALIF.
ETALONNAGE
4-07C-R10 PART NO. LYK

NOT BY FORD MOTOR CO. IN U.S.A.
LTD. 1457-12/35886
DATE: 09/74
FRONT: 2845L 7445
REAR: 1444L 7445
THIS DEVICE COMPLIES TO THE FEDERAL MOTOR
VEHICLE SAFETY, FEDERAL AND NHTSA STANDARDS
IN EFFECT ON DATE OF MANUFACTURE. SHOW BODY
ID: 3FASD13JXRM1076
THE PASSENGER
1440
1400
1400

Figure B-34 CERTIFICATION PLACARD

APPENDIX C
PHOTOGRAPHS: VEHICLE 2

APPENDIX C

TABLE OF CONTENTS

<u>Figure No.</u>	<u>Photograph Title</u>	<u>Page No.</u>
C-1	PRE-TEST FRONT VIEW	C-3
C-2	POST-TEST FRONT VIEW	C-4
C-3	PRE-TEST FRONT RIGHT THREE QUARTER VIEW	C-5
C-4	POST-TEST FRONT RIGHT THREE QUARTER VIEW	C-6
C-5	PRE-TEST RIGHT SIDE VIEW	C-7
C-6	POST-TEST RIGHT SIDE VIEW	C-8
C-7	PRE-TEST REAR RIGHT THREE QUARTER VIEW	C-9
C-8	POST-TEST REAR RIGHT THREE QUARTER VIEW	C-10
C-9	PRE-TEST REAR VIEW	C-11
C-10	POST-TEST REAR VIEW	C-12
C-11	PRE-TEST REAR LEFT THREE QUARTER VIEW	C-13
C-12	POST-TEST REAR LEFT THREE QUARTER VIEW	C-14
C-13	PRE-TEST LEFT SIDE VIEW	C-15
C-14	POST-TEST LEFT SIDE VIEW	C-16
C-15	PRE-TEST FRONT LEFT THREE QUARTER VIEW	C-17
C-16	POST-TEST FRONT LEFT THREE QUARTER VIEW	C-18

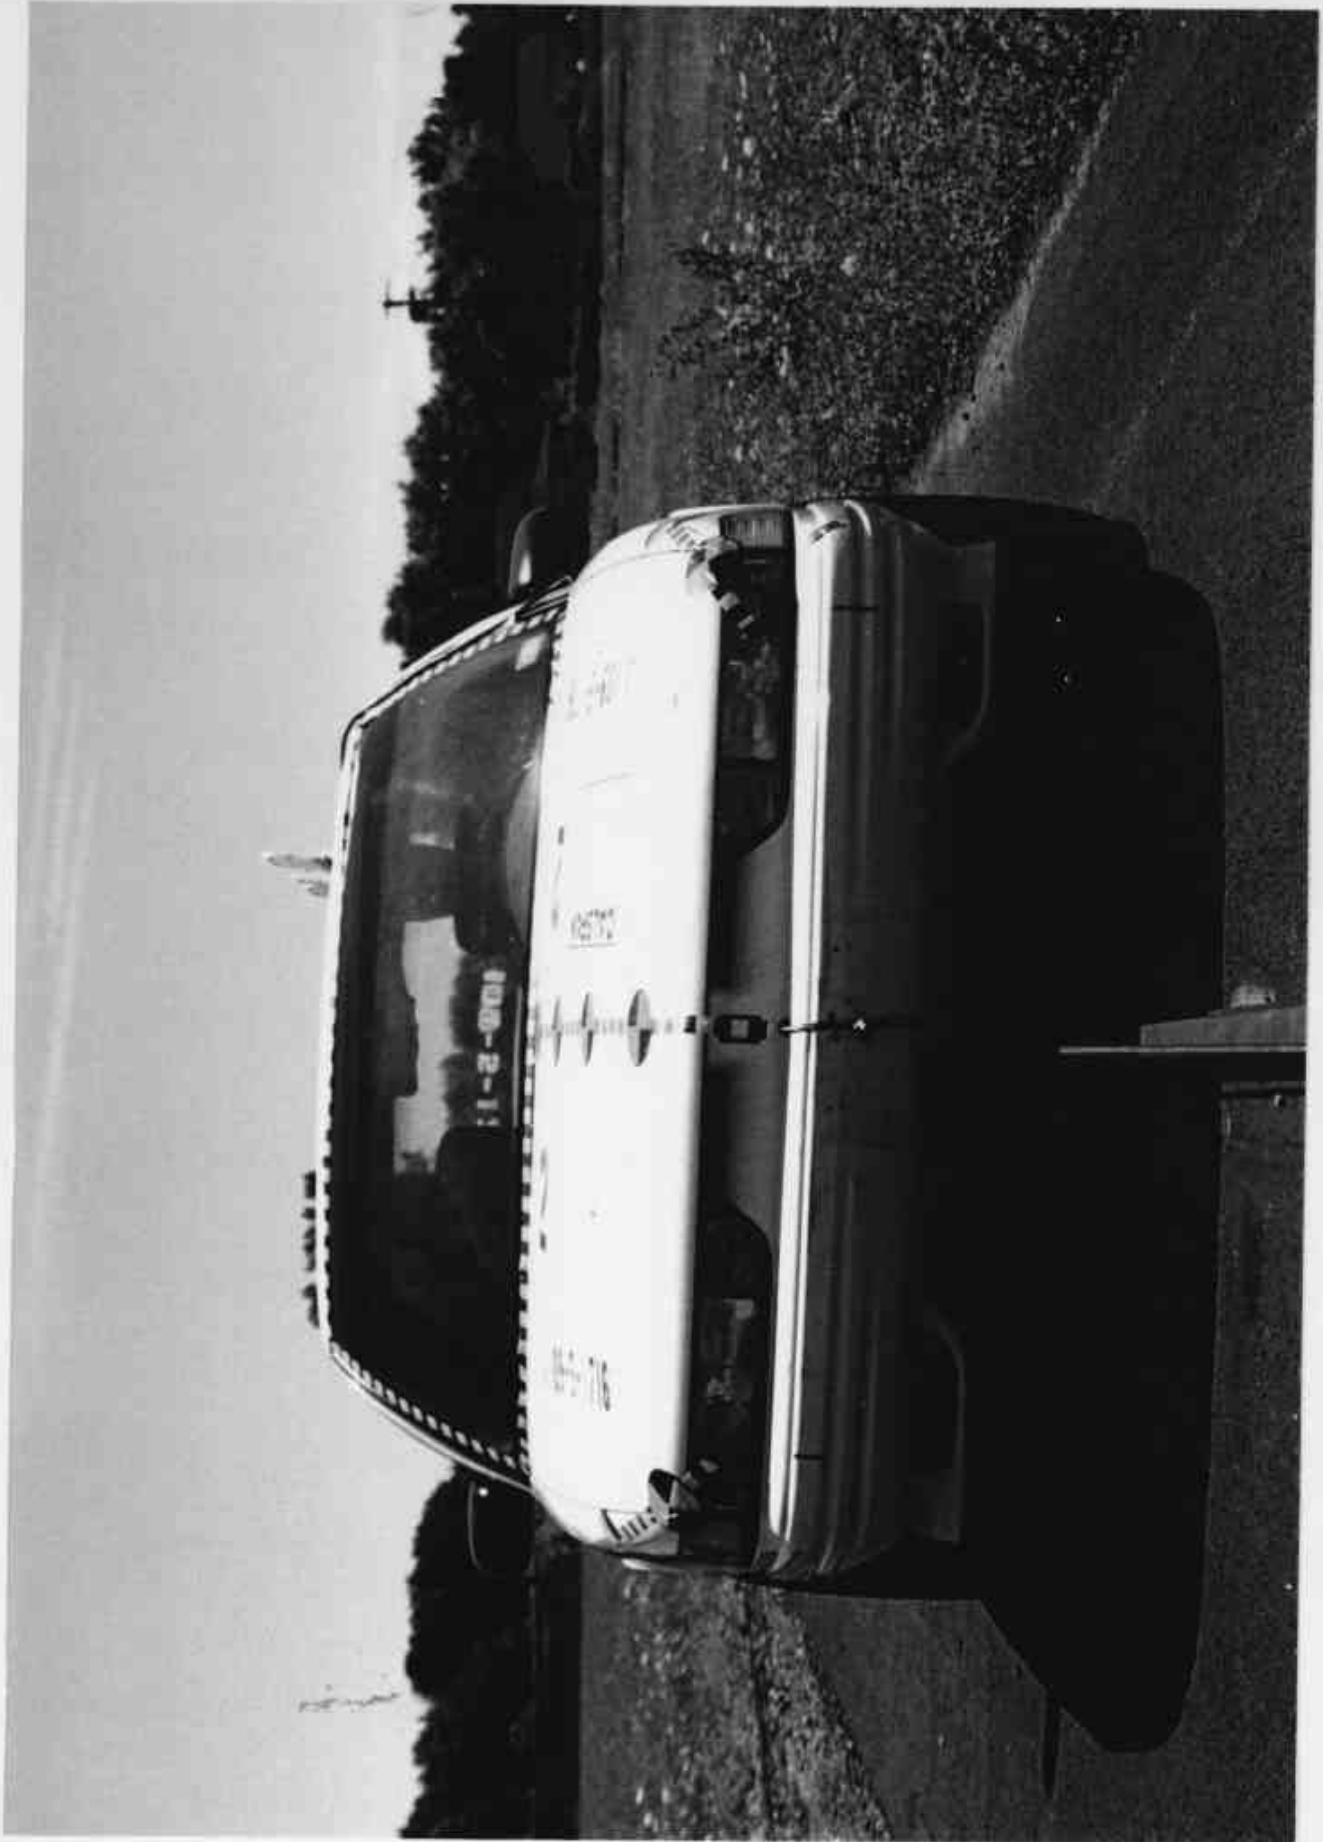


Figure C-1 PRE-TEST FRONT VIEW

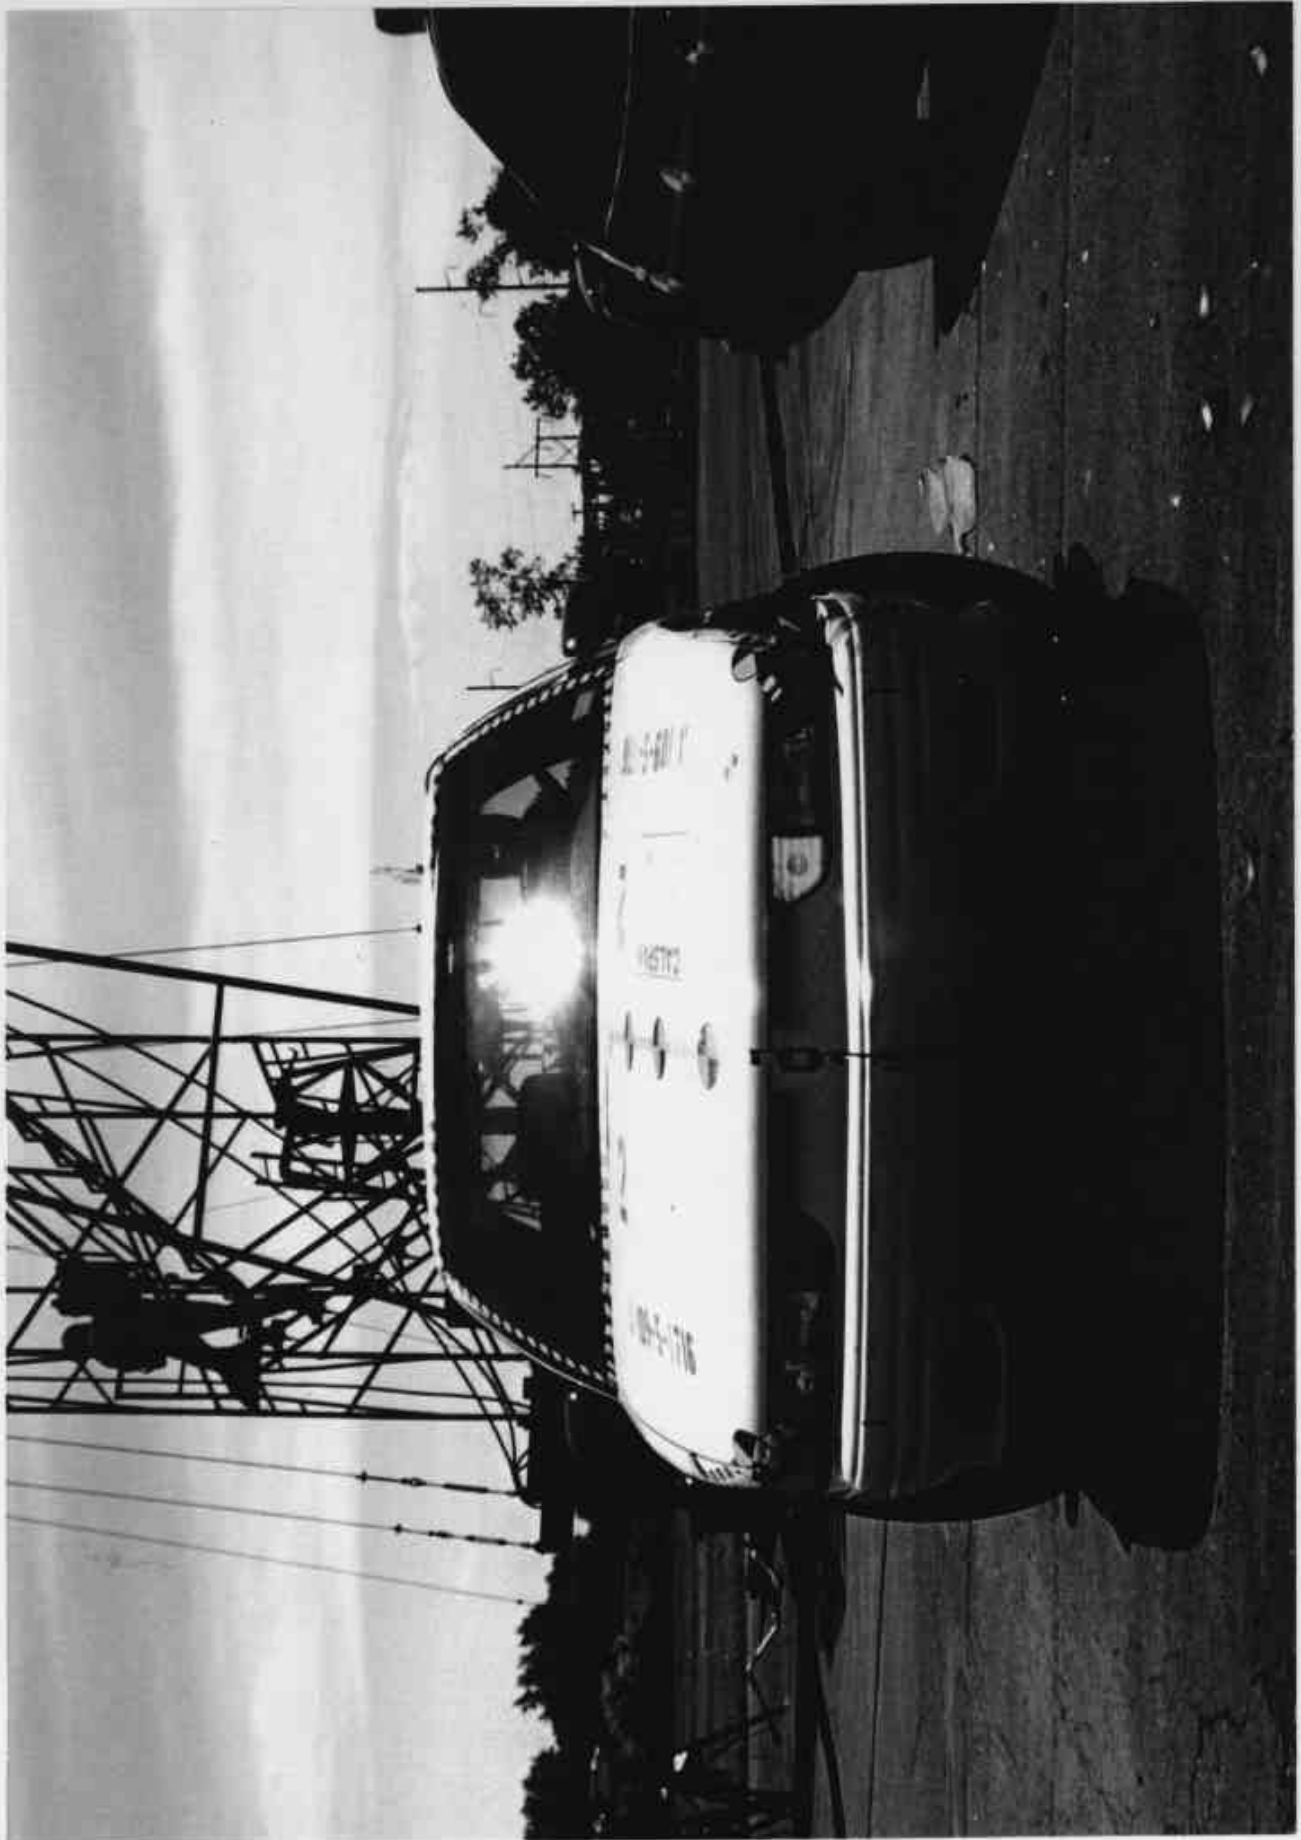


Figure C-2 POST-TEST FRONT VIEW



Figure C-3 PRE-TEST FRONT RIGHT THREE QUARTER VIEW



Figure C-4 POST-TEST FRONT RIGHT THREE QUARTER VIEW


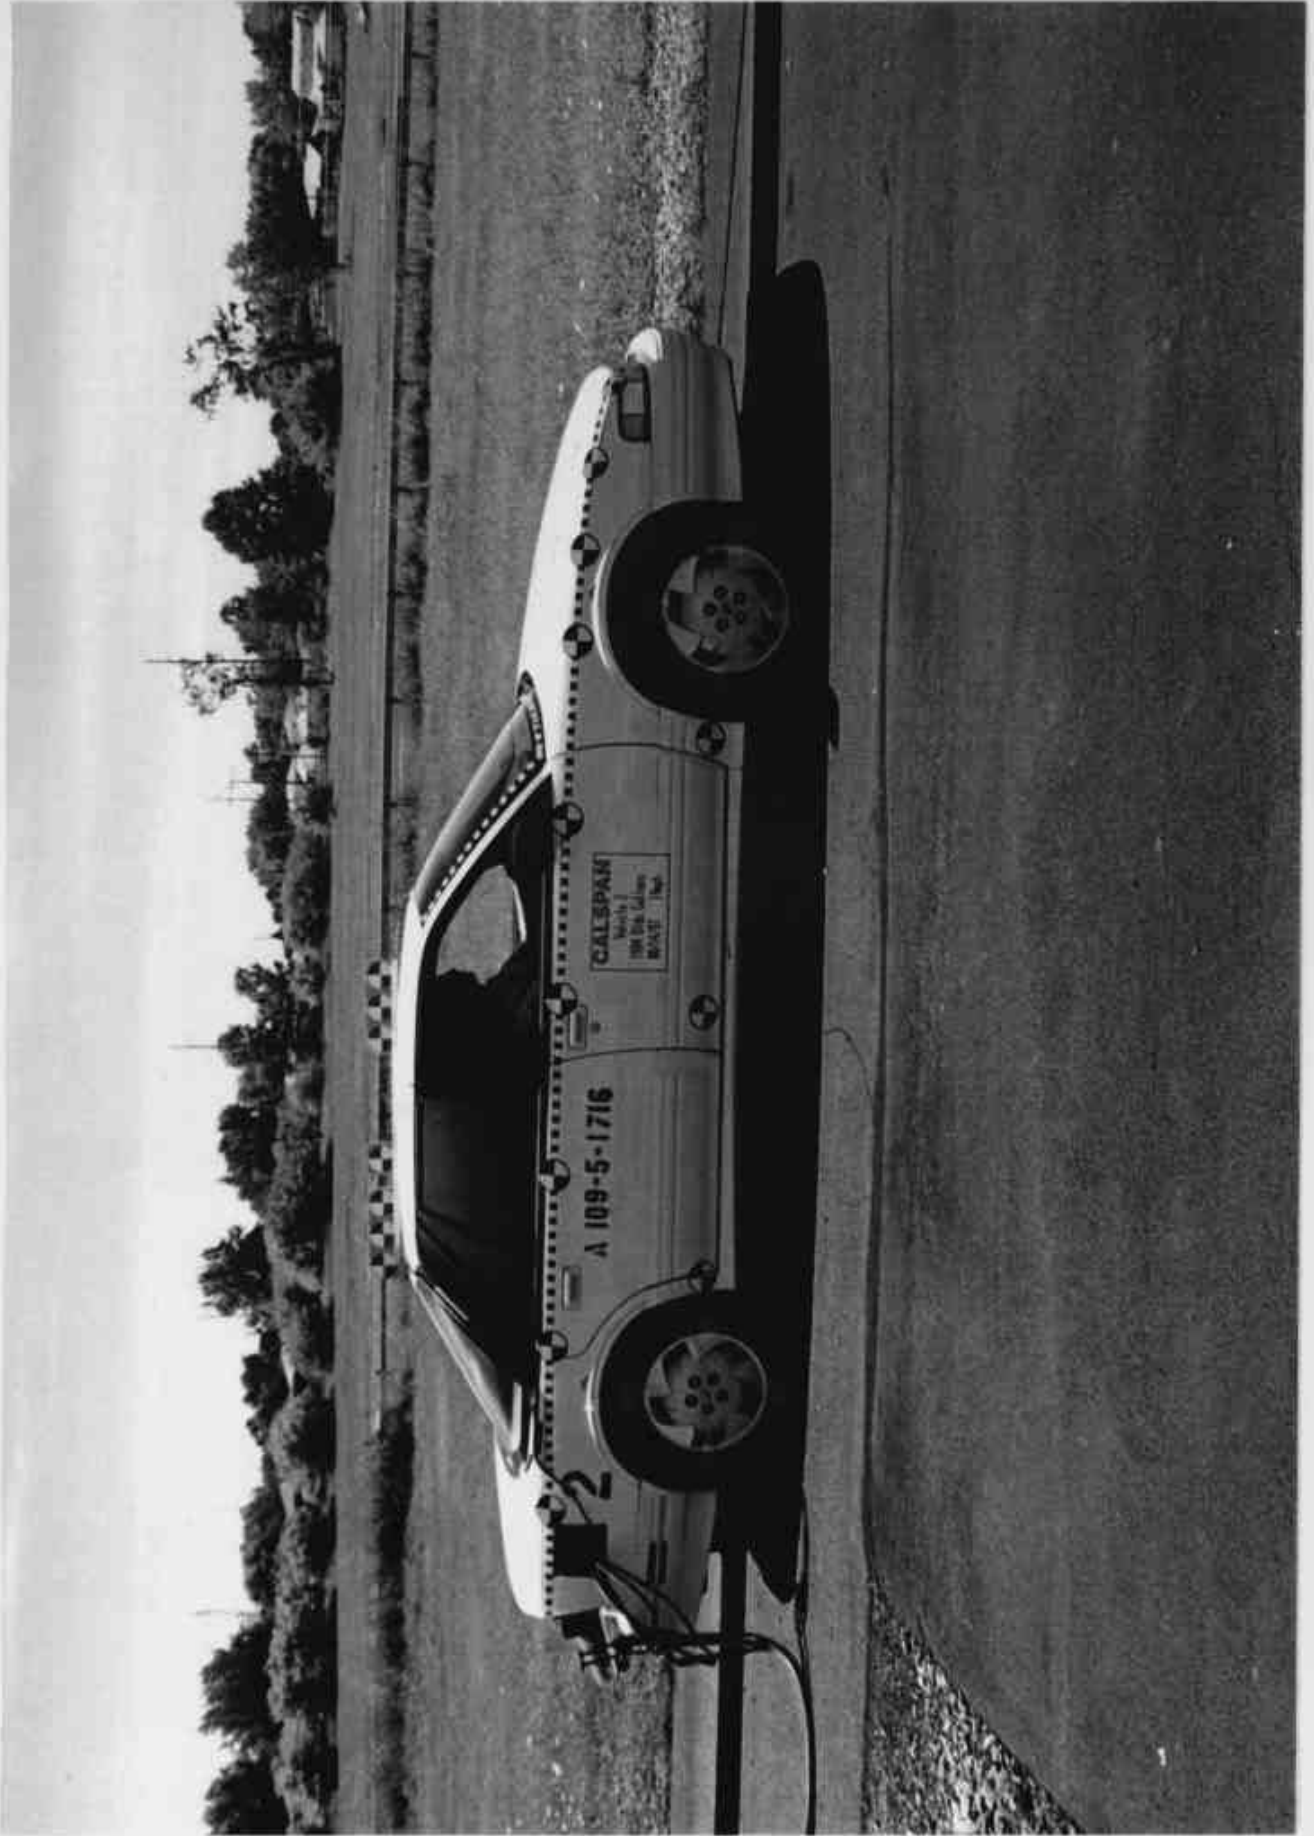


Figure C-5 PRE-TEST RIGHT SIDE VIEW

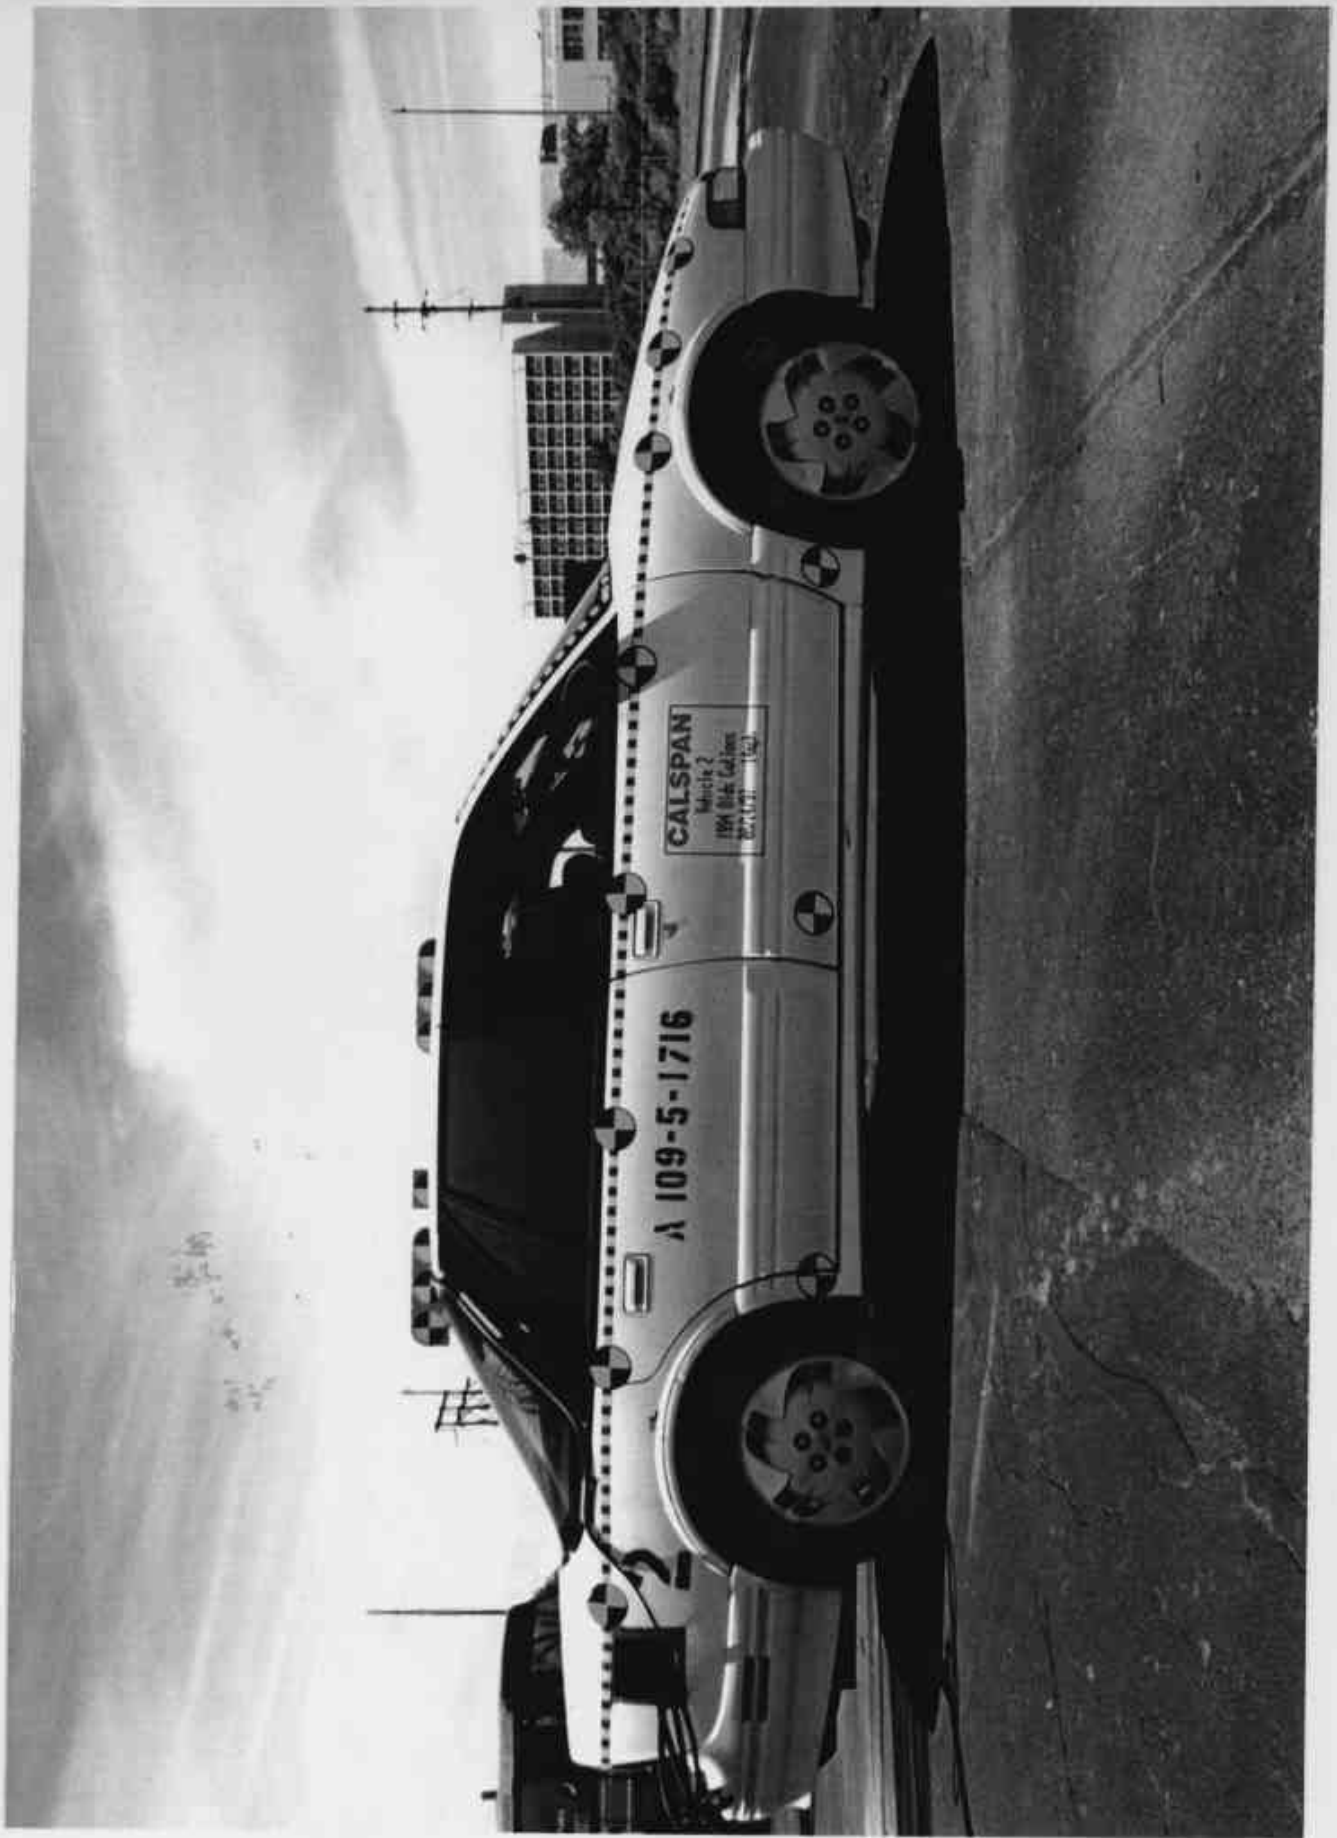

C-8

8404-5

Figure C-6 POST-TEST RIGHT SIDE VIEW



Figure C-7 PRE-TEST REAR RIGHT THREE QUARTER VIEW



Figure C-8 POST-TEST REAR RIGHT THREE QUARTER VIEW



Figure C-9 PRE-TEST REAR VIEW



Figure C-10 POST-TEST REAR VIEW



Figure C-11 PRE-TEST REAR LEFT THREE QUARTER VIEW

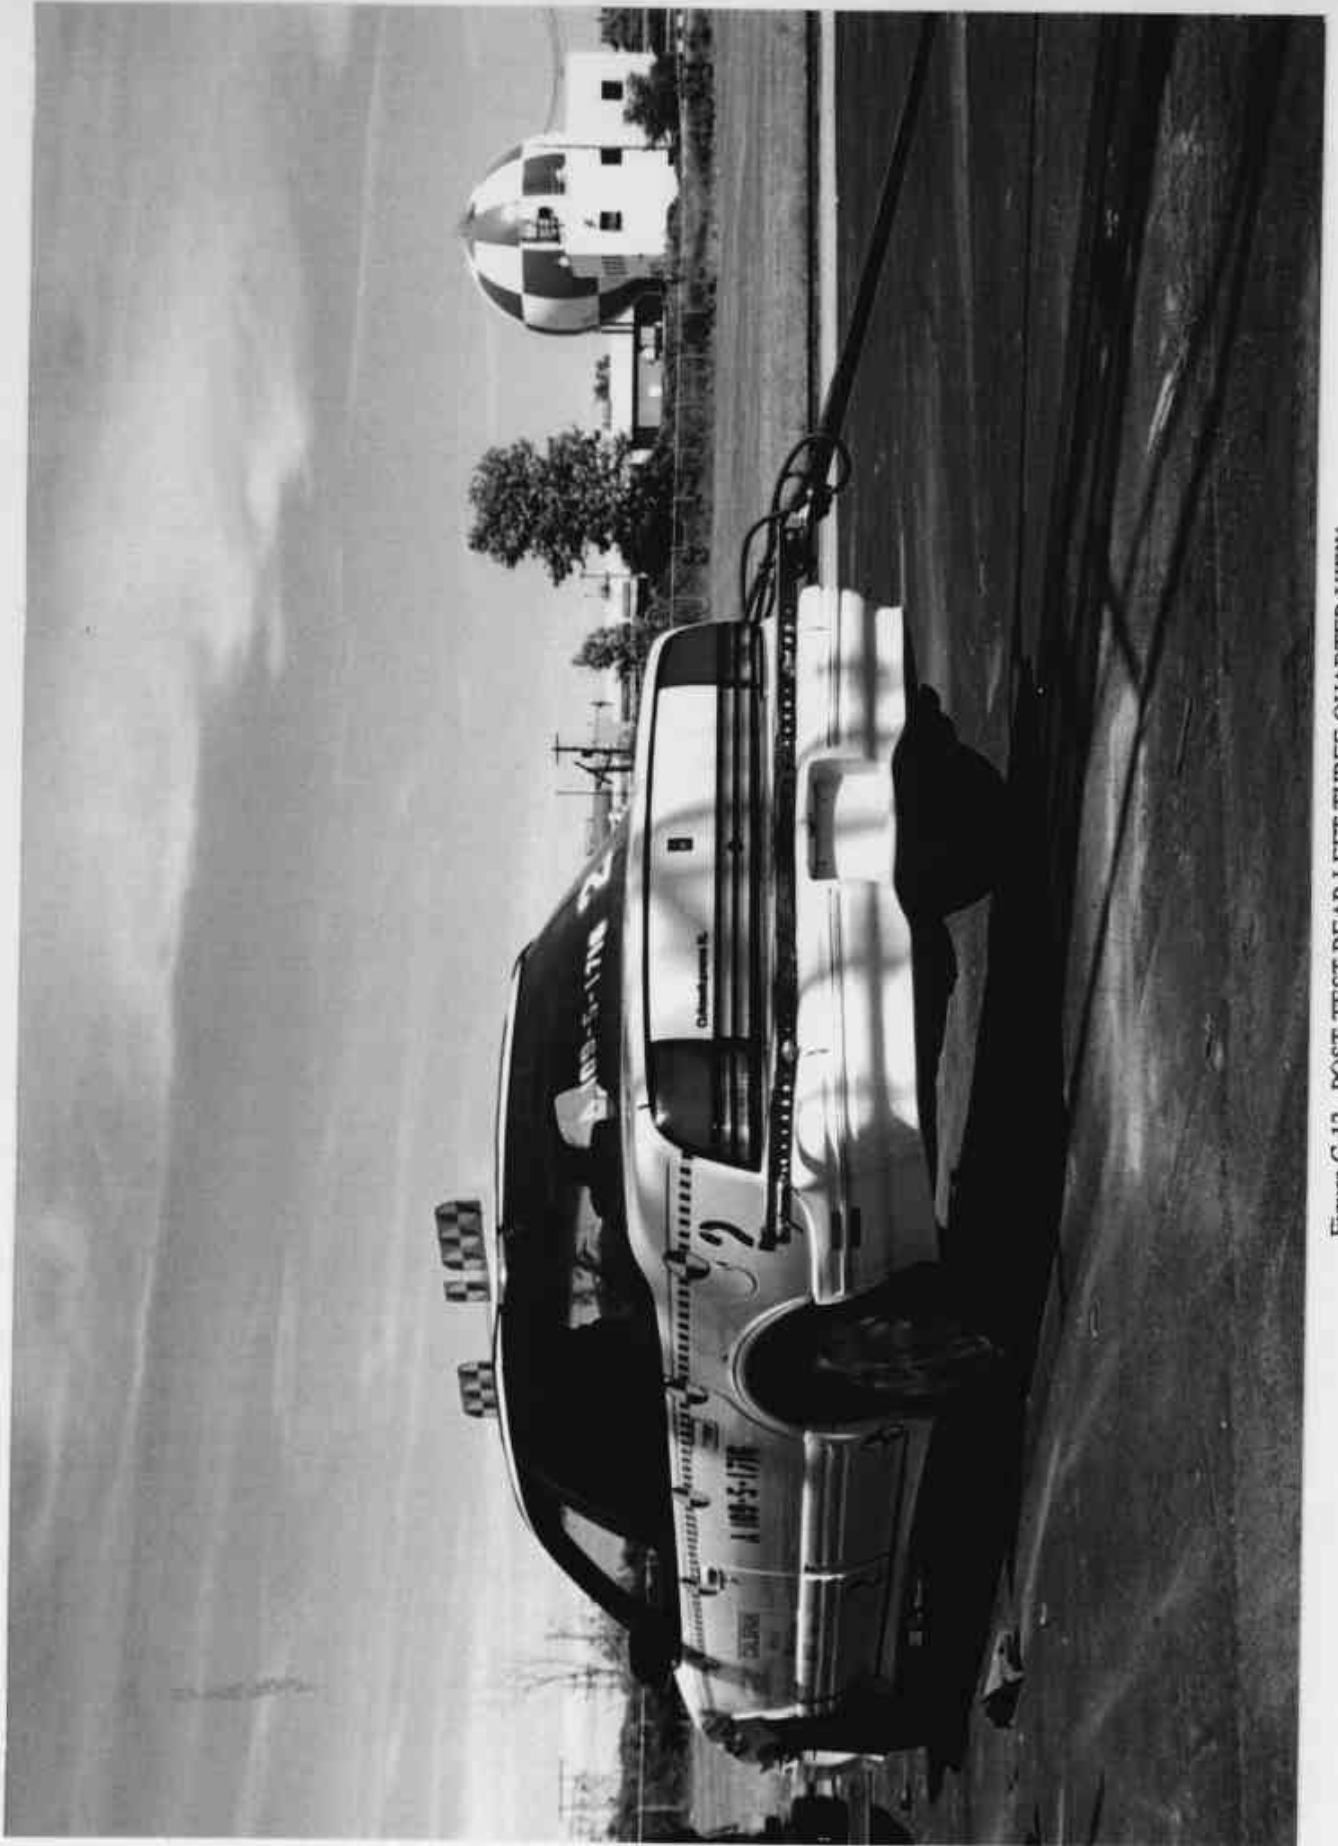


Figure C-12 POST-TEST REAR LEFT THREE QUARTER VIEW

C-14

8404-5

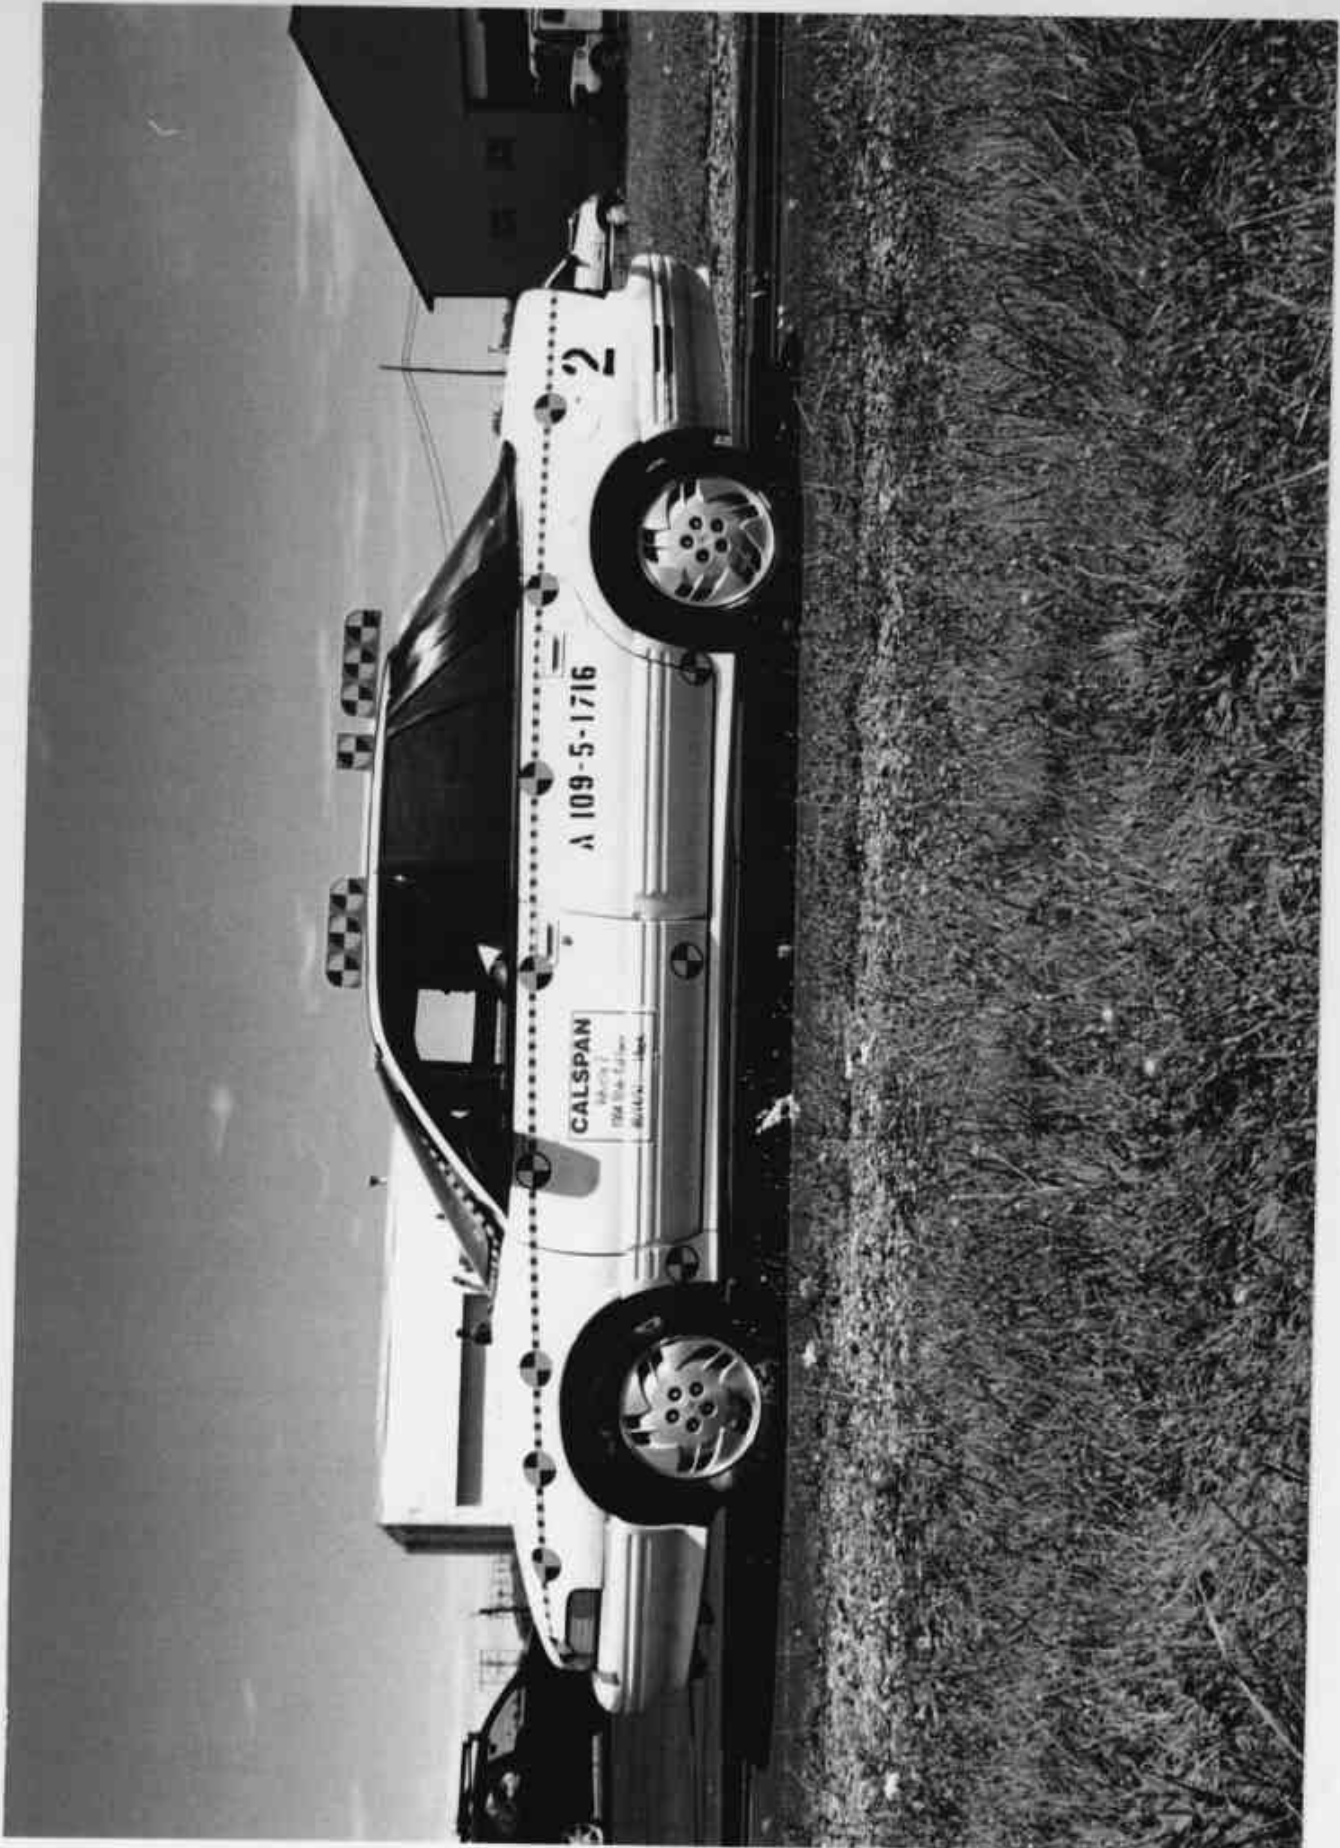


Figure C-13 PRE-TEST LEFT SIDE VIEW



Figure C-14 POST-TEST LEFT SIDE VIEW



Figure C-15 PRE-TEST FRONT LEFT THREE QUARTER VIEW



Figure C-16 POST-TEST FRONT LEFT THREE QUARTER VIEW

APPENDIX D

VEHICLE AND DUMMY RESPONSE DATA


Key: V1 - Vehicle 1
V2 - Vehicle 2
P1 - Driver Side Dummy (5th female)
P2 - Right Front Passenger Side Dummy (6 year old)

TEST NO. A109-5-1716

VEHICLE 1 - VEHICLE DATA

CHANNEL	SAE FILTER CHANNEL CLASS
Vehicle Data	60
Integrations	180


VTV TEST Ford Escort/Olds Cutlass

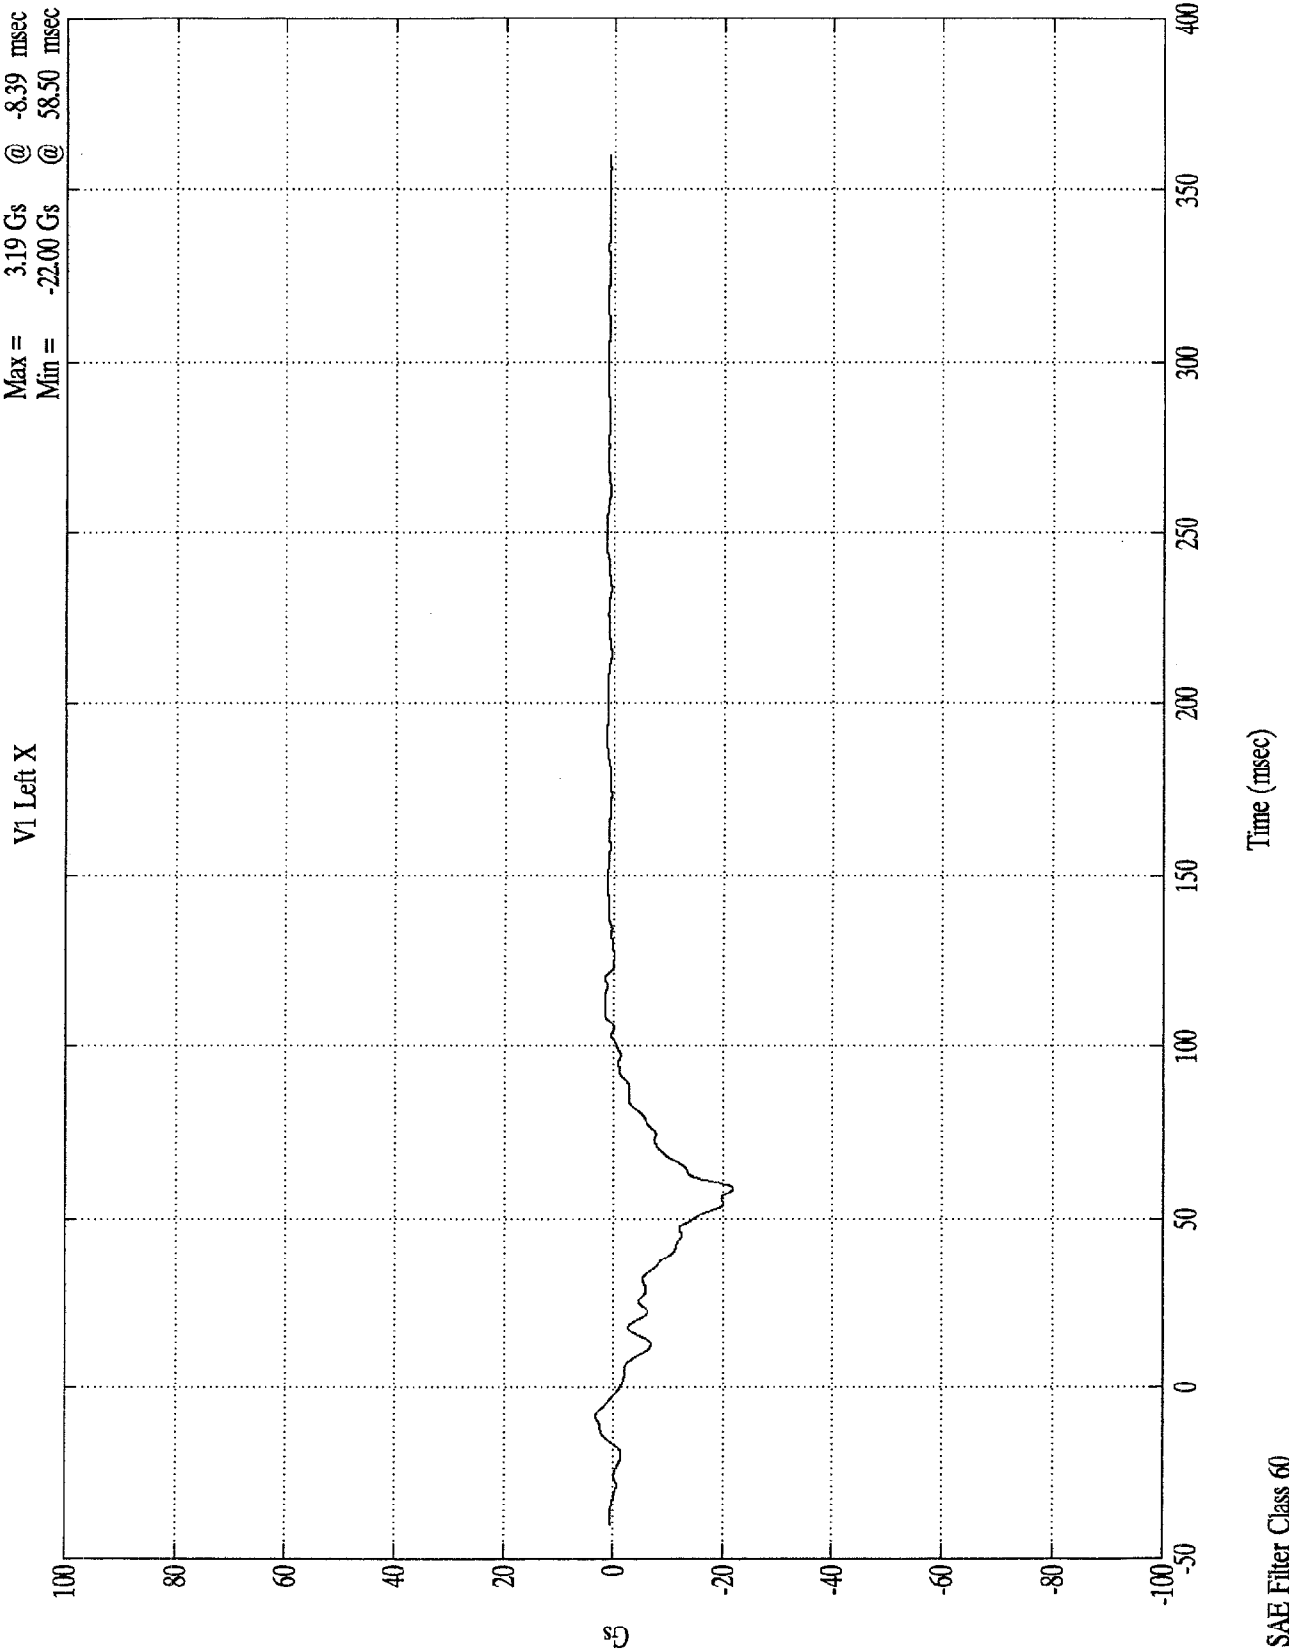

VTV TEST Ford Escort/Olds Outlass

1st Integral V1 Left X


Max = 22.49 kph @ 0.00 msec
Min = -4.20 kph @ 101.70 msec

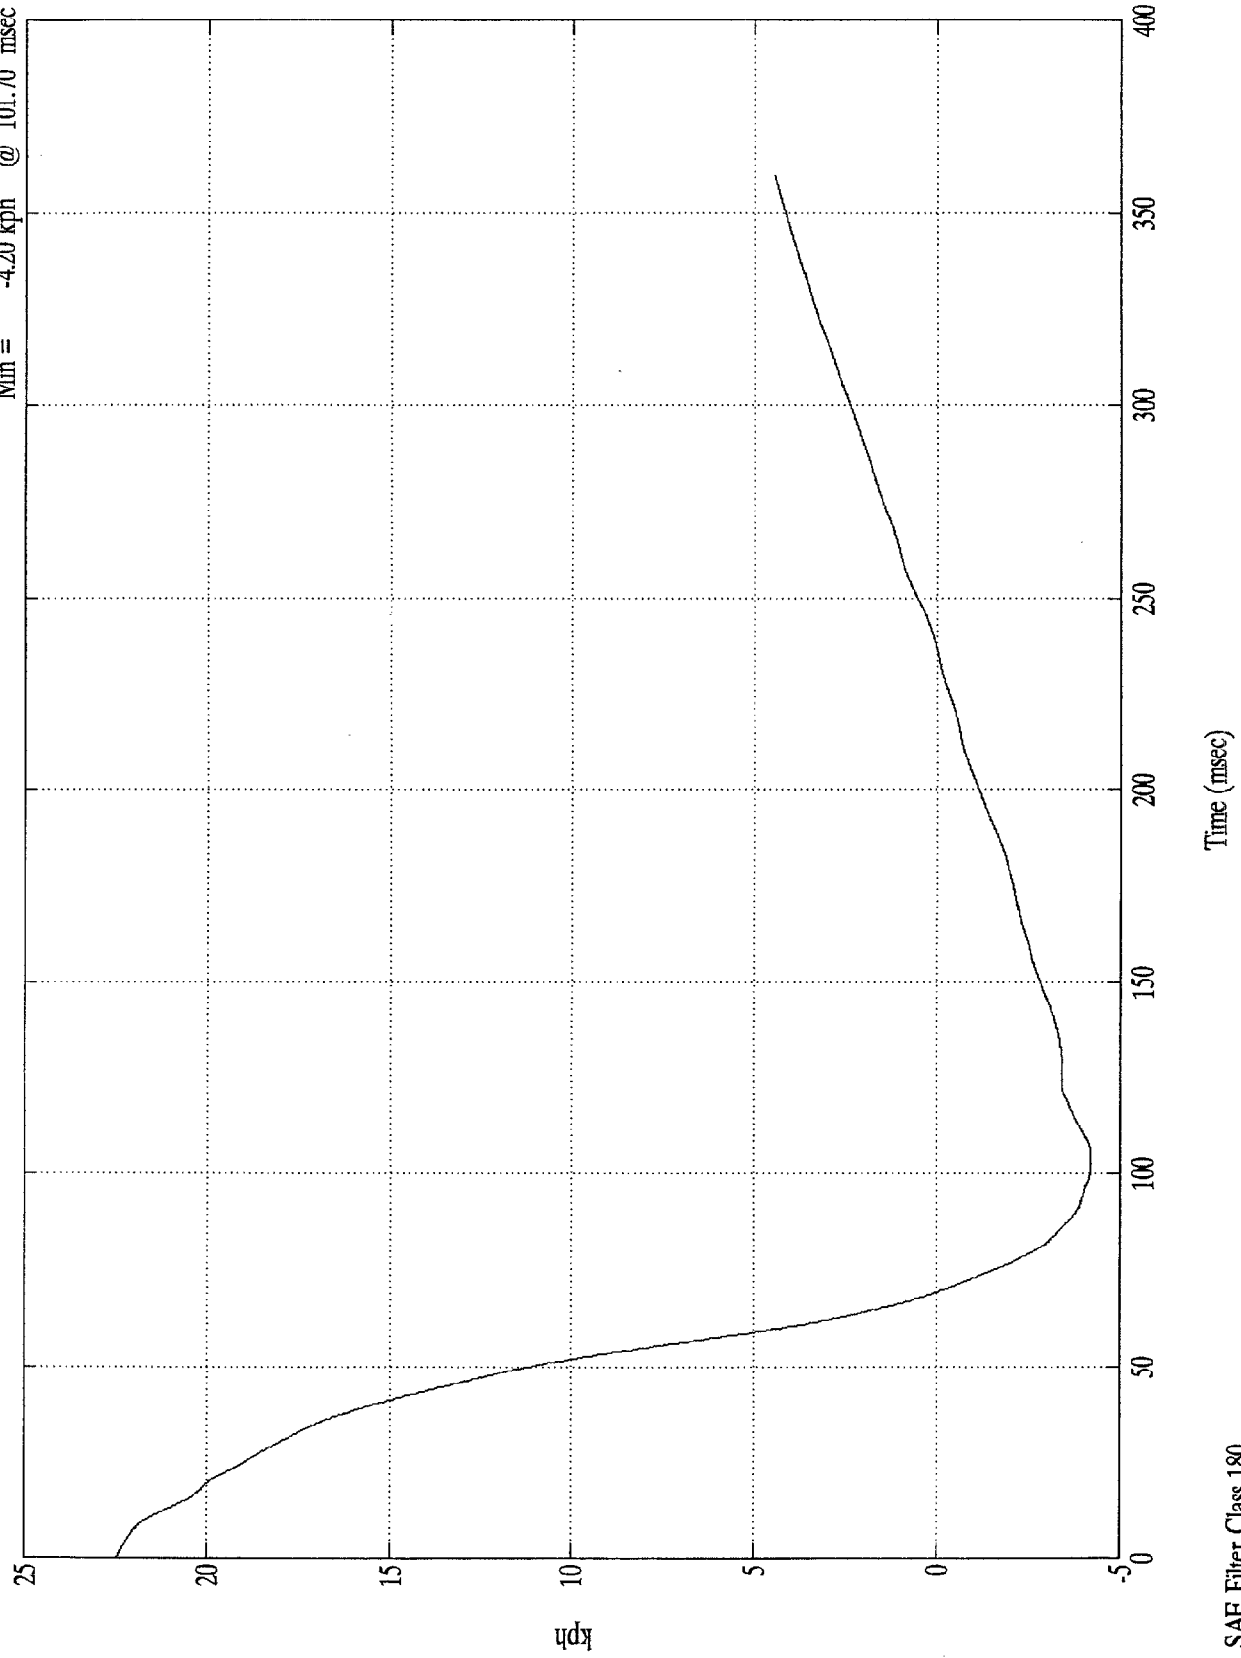

VTV TEST Ford Escort/Olds Cutlass

2nd Integral V1 Left X


Max = 282.91 mm @ 69.39 msec
Min = .00 mm @ 0.00 msec

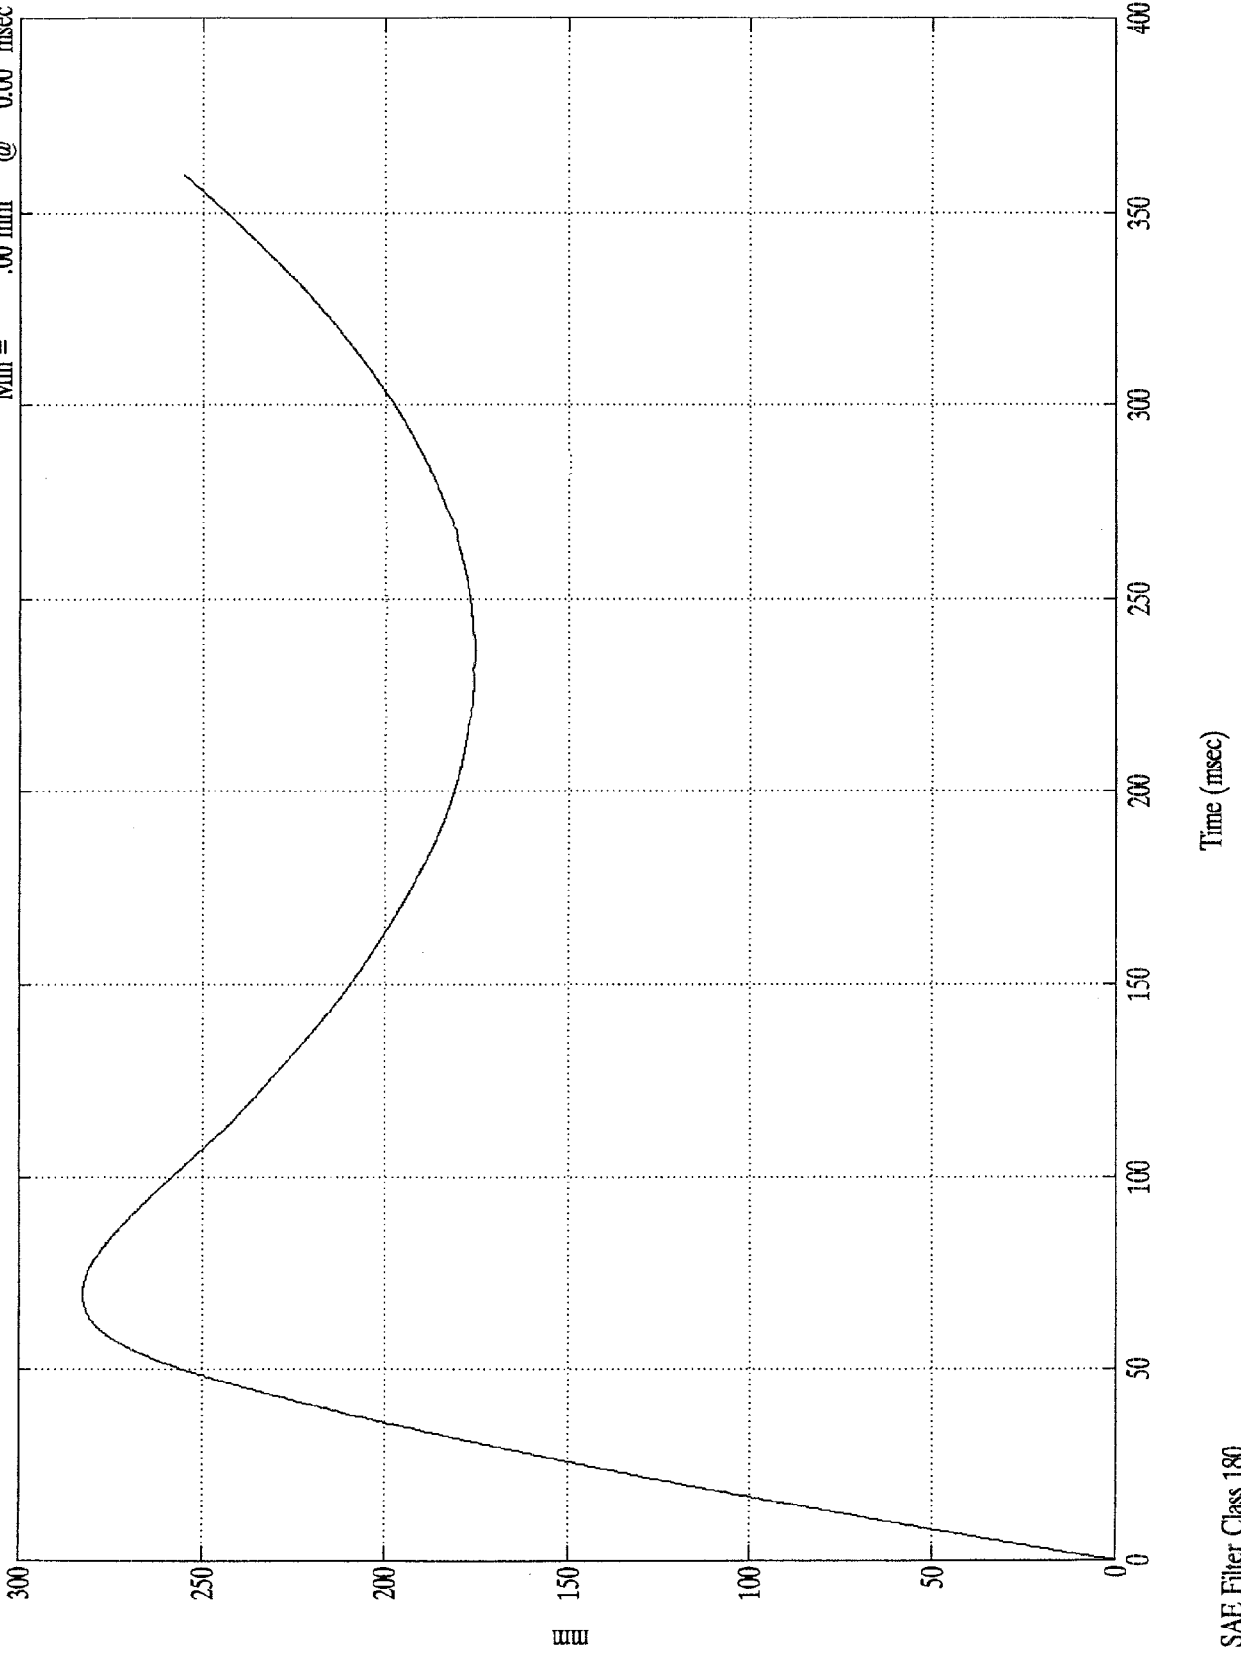


VTV TEST Ford Escort/Olds Cutlass

Max = 9.68 Gs @ 58.50 msec
Min = -2.33 Gs @ 114.69 msec

V1 Left Y

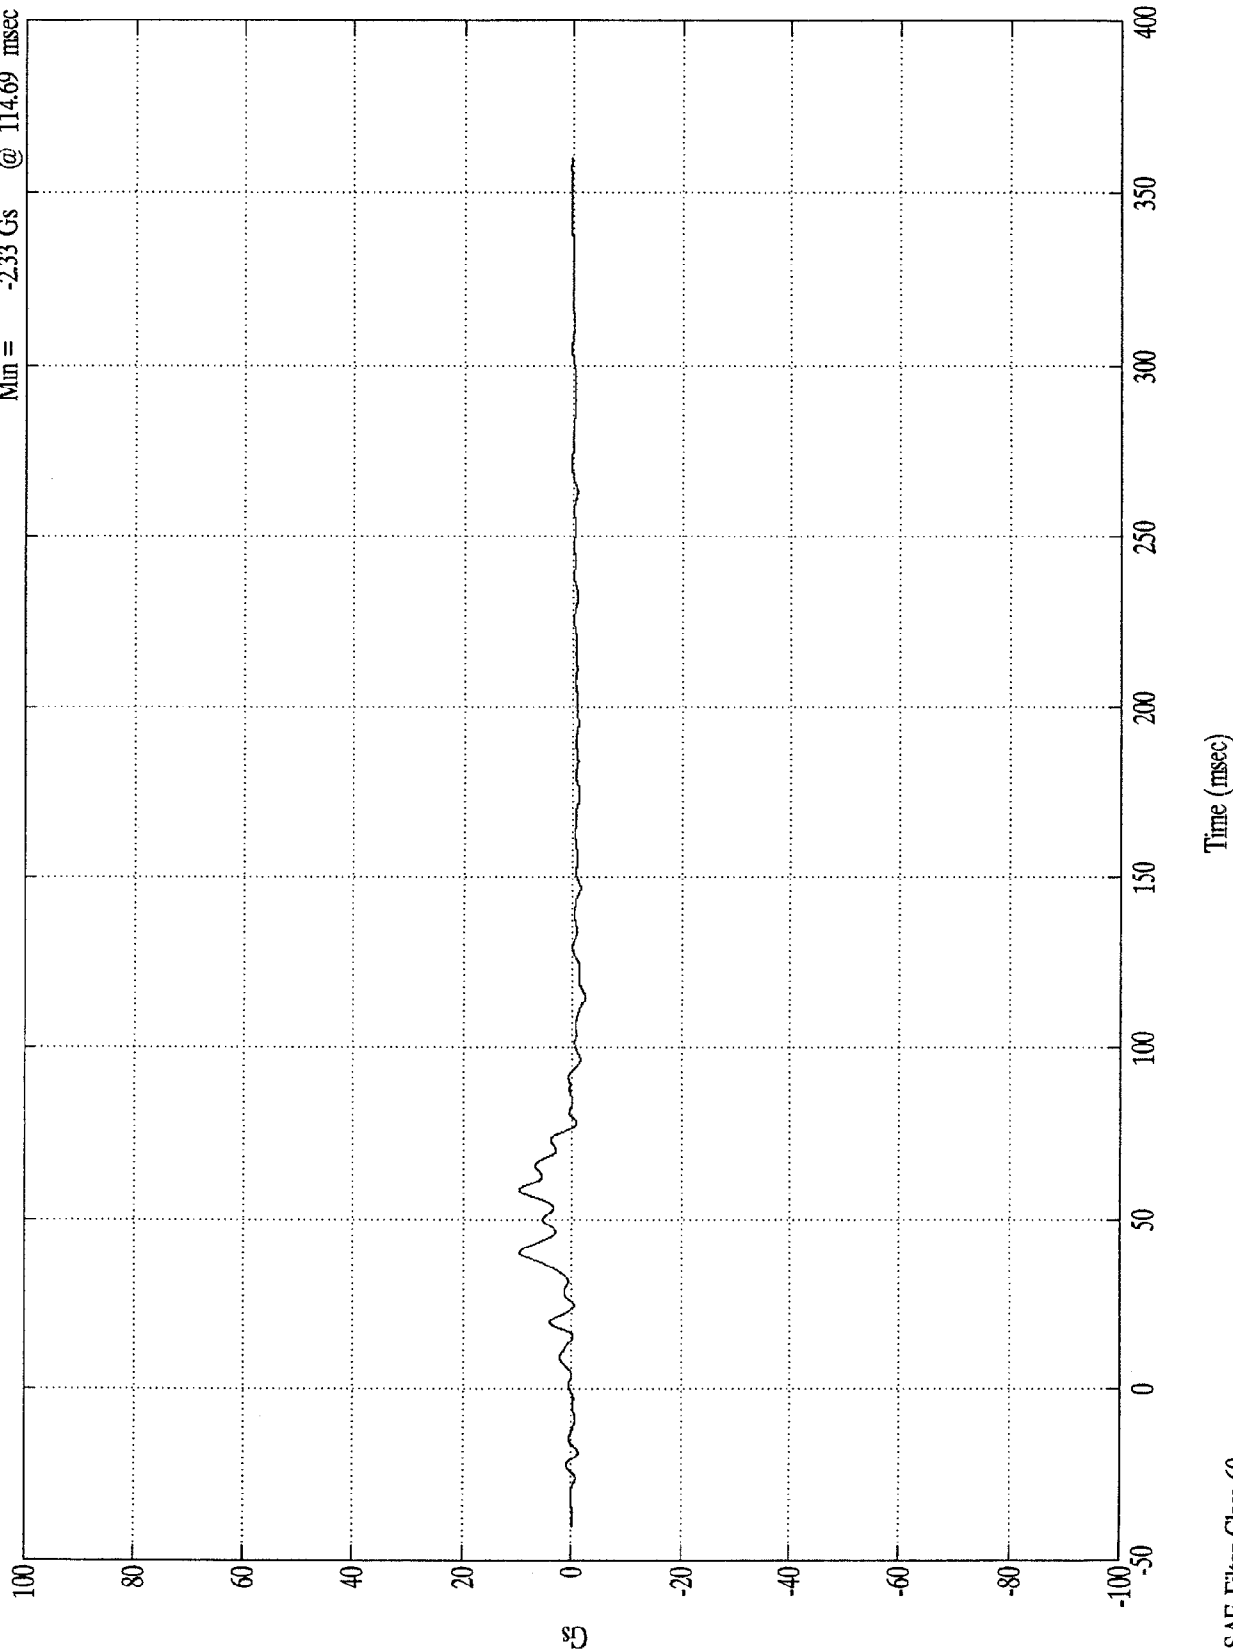

VIV TEST Ford Escort/Olds Cutlass

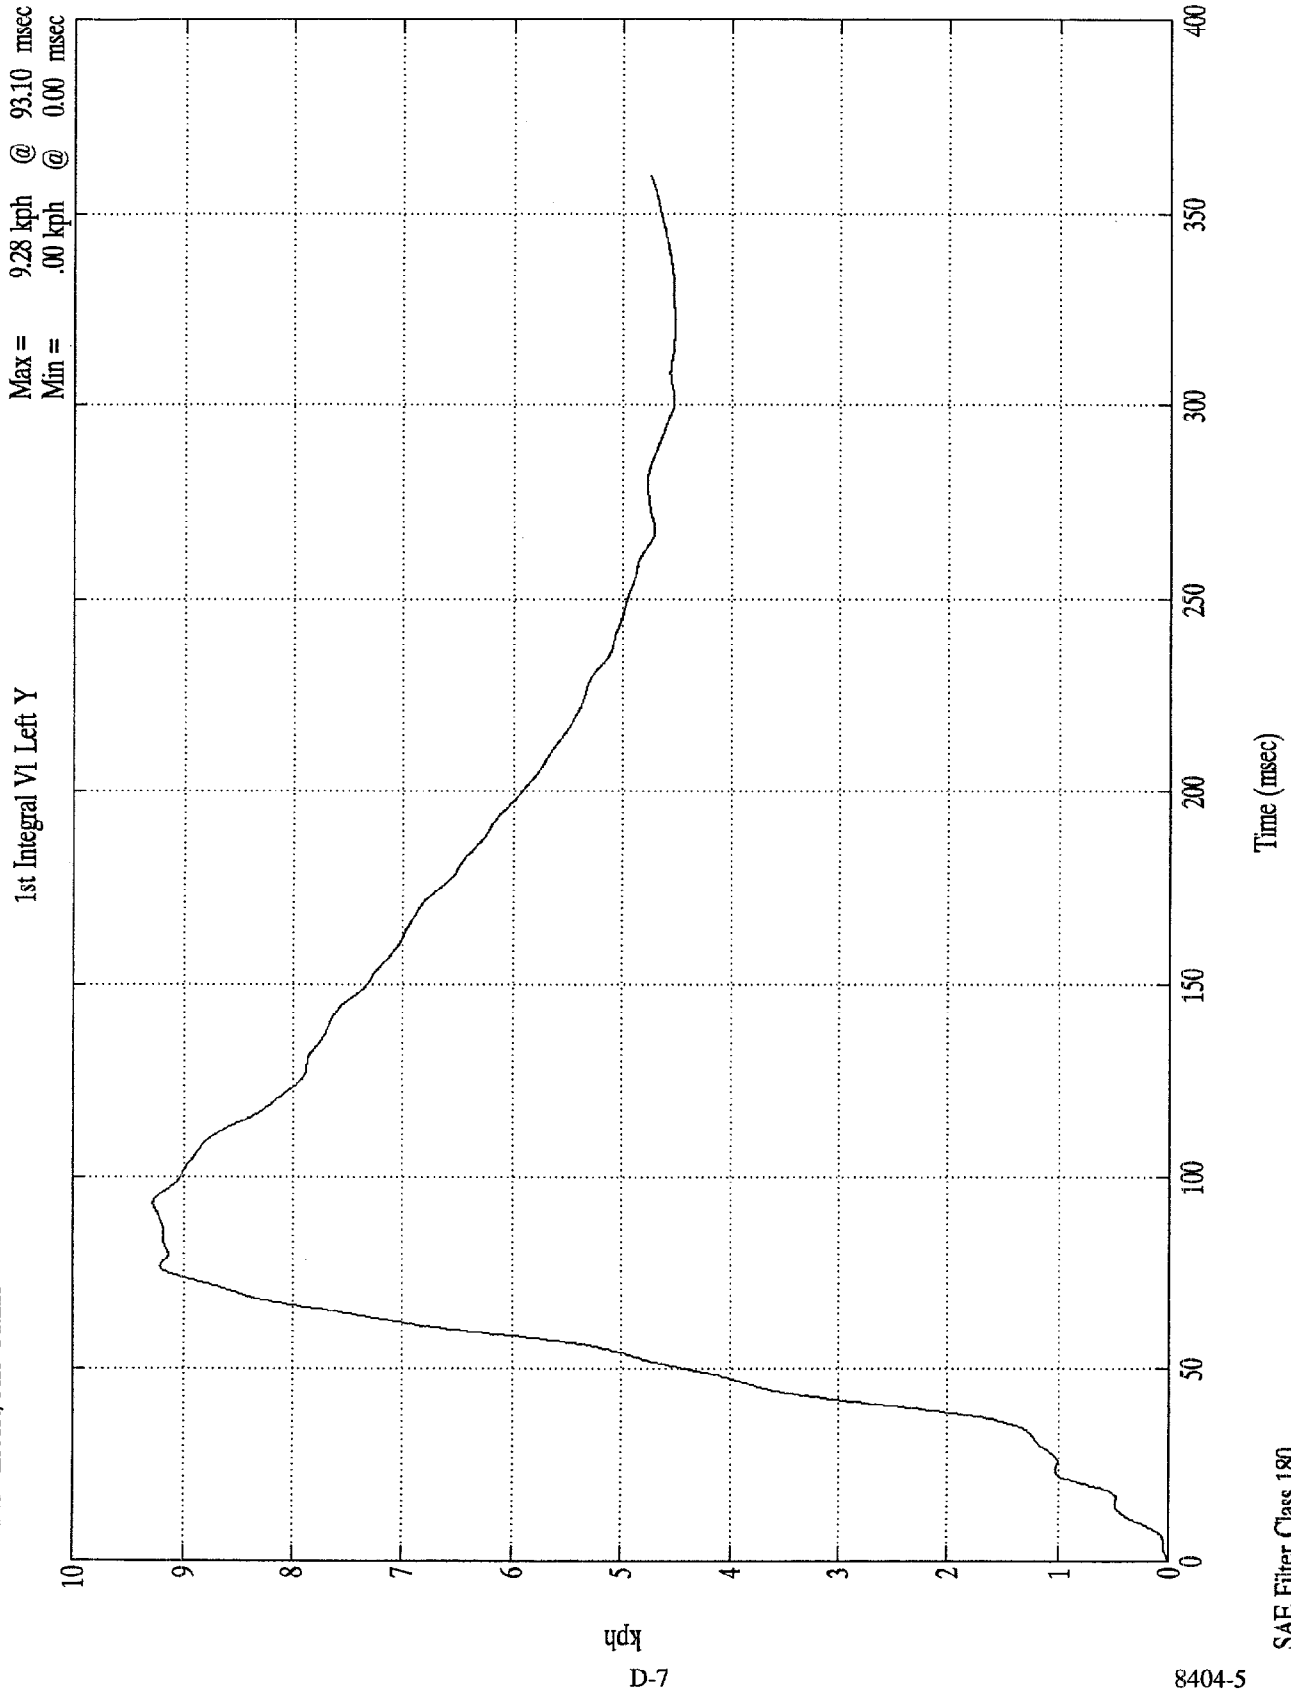


D-7

8404-5

SAE Filter Class 180


VTV TEST Ford Escort/Olds Cutlass

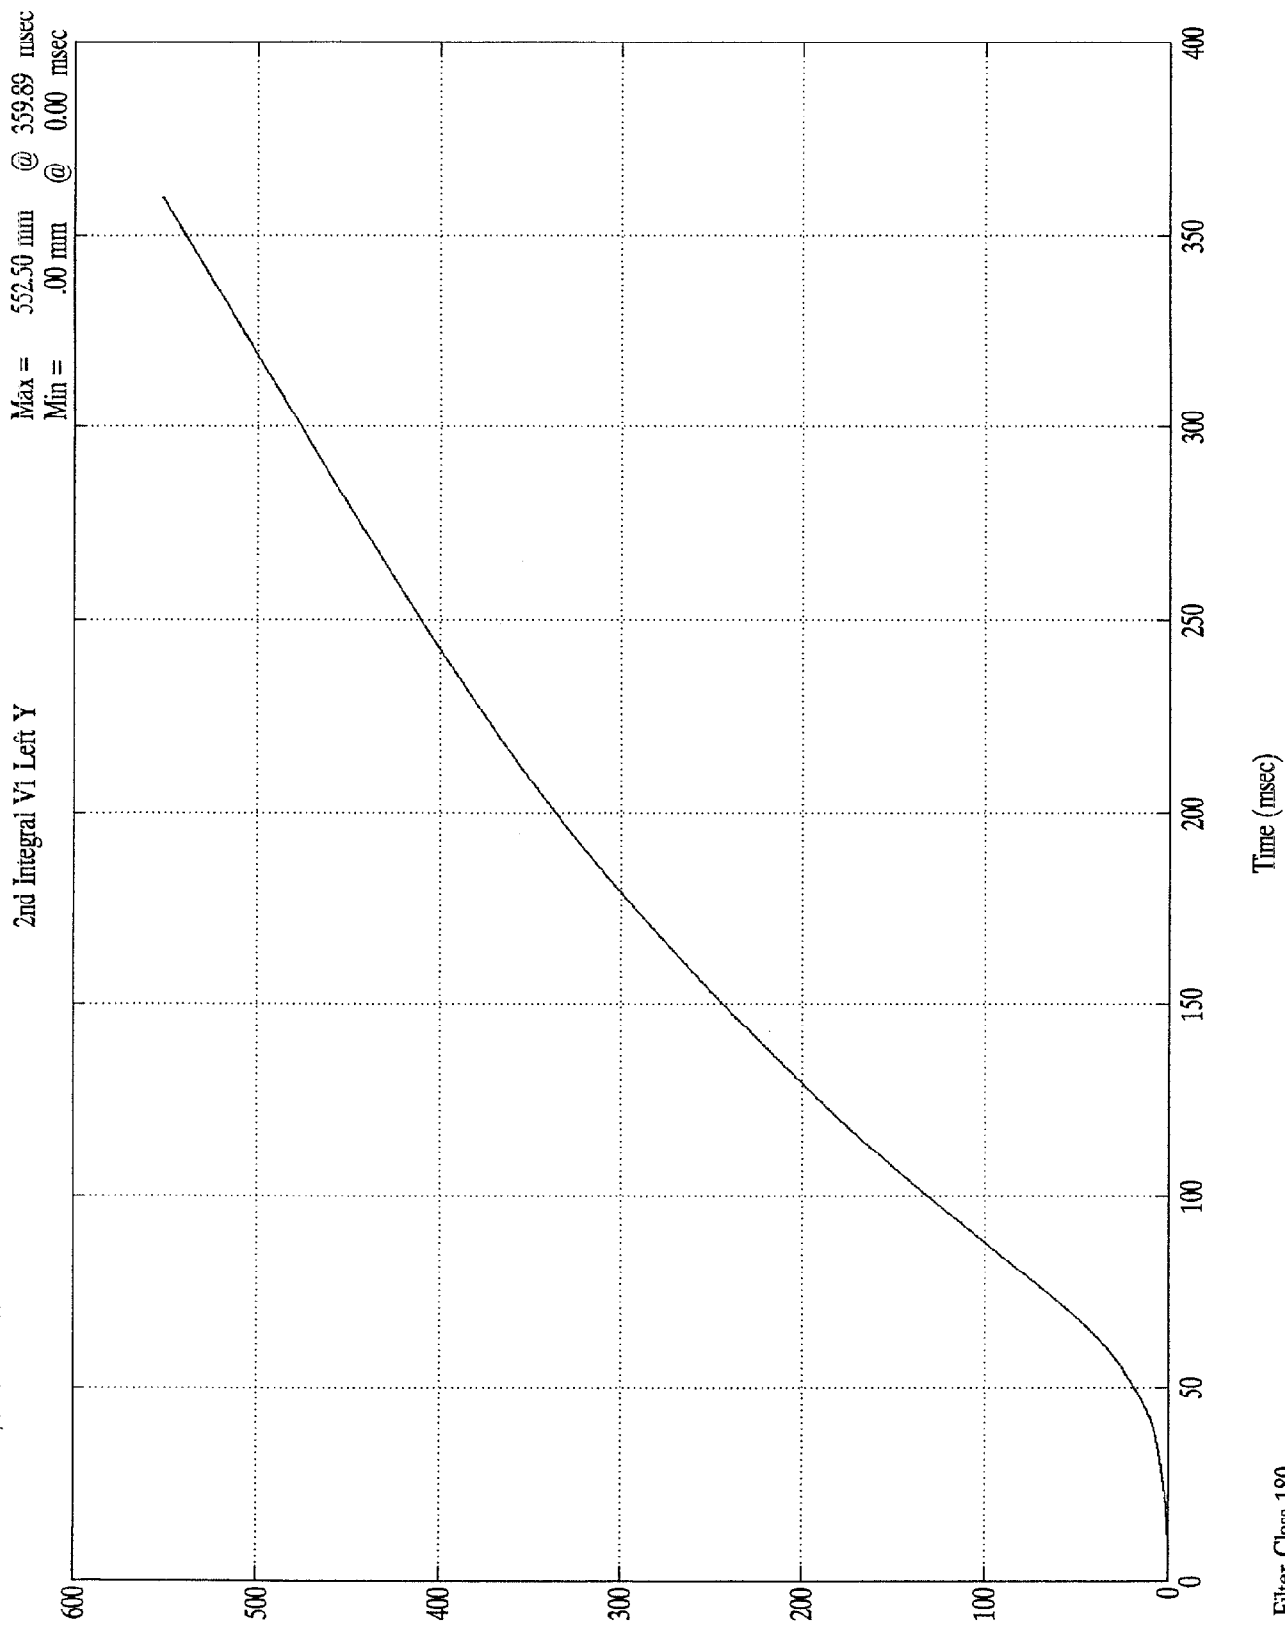

VTV TEST Ford Escort/Olds Cutlass

Max = 4.10 Gs @ 7.69 msec
Min = -20.32 Gs @ 53.99 msec

V1 Center X

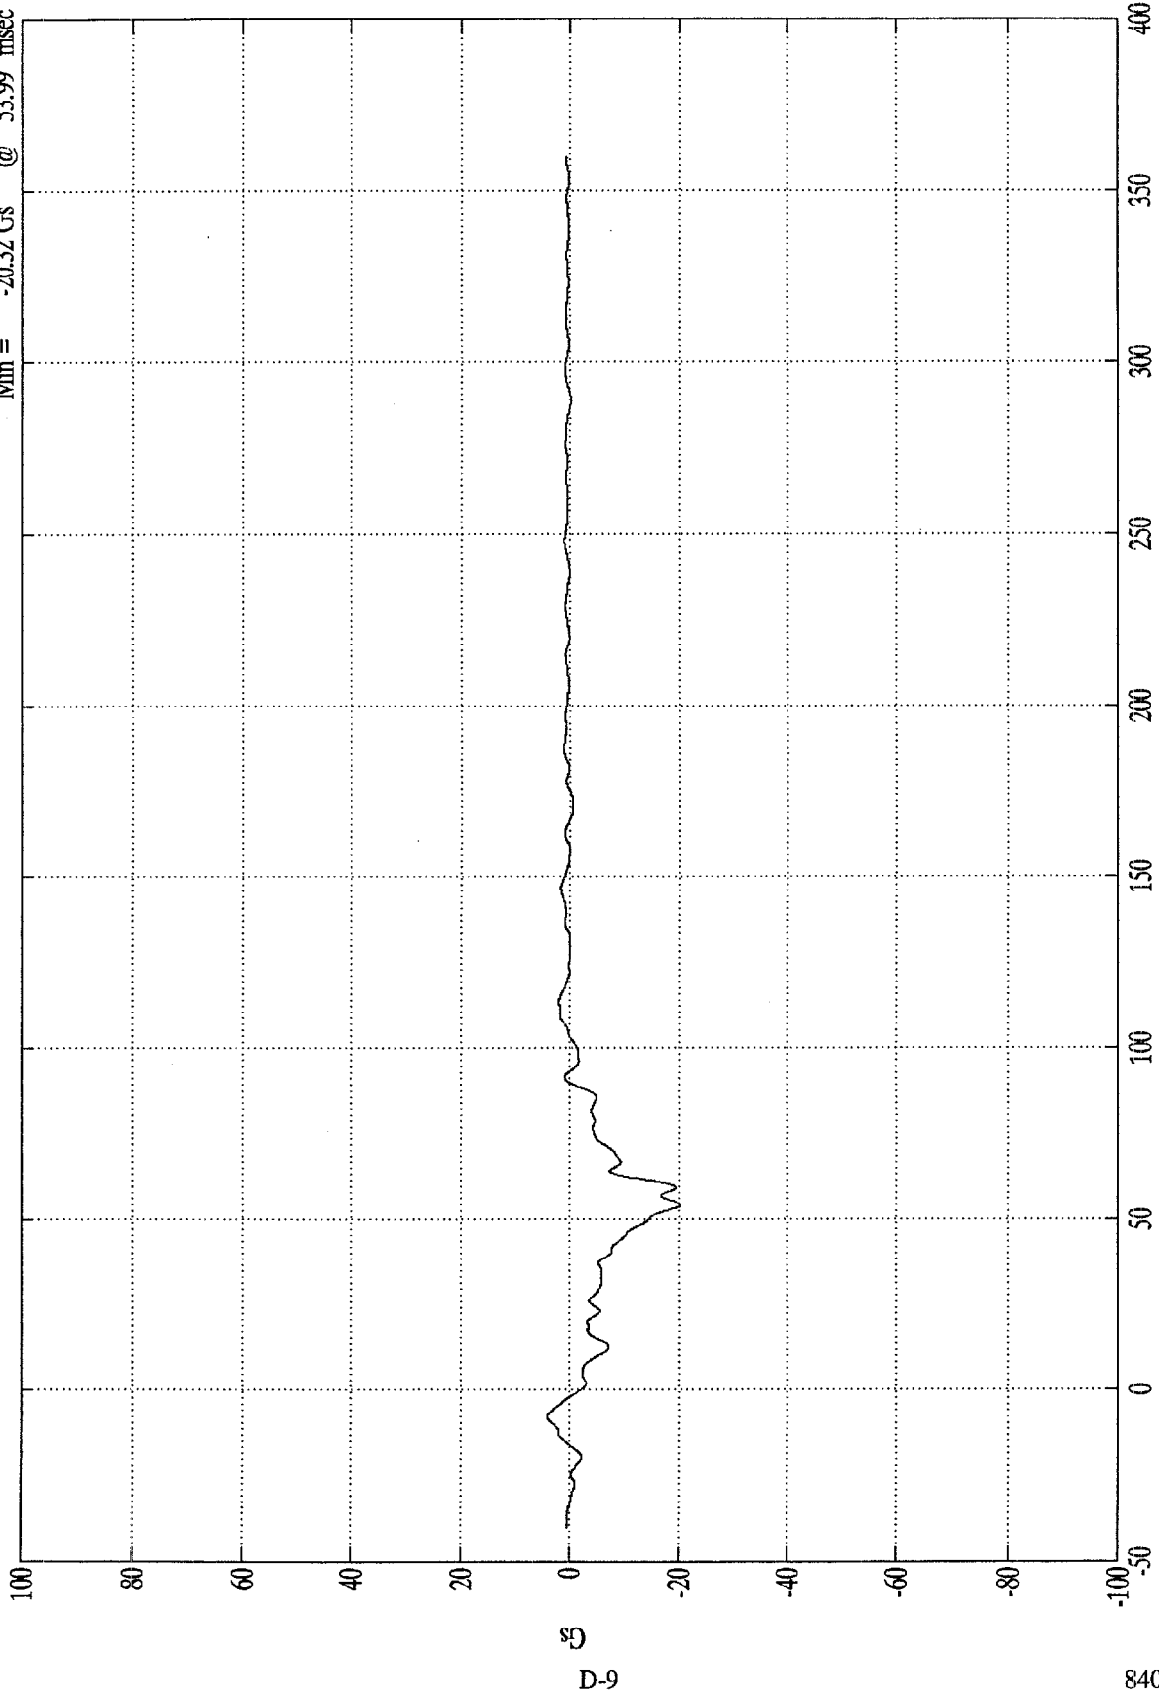

Time (msec)

SAE Filter Class 60


D-9

8404-5

VTV TEST Ford Escort/Olds Cutlass

1st Integral V1 Center X


Max = 22.49 kph @ 0.00 msec
Min = -1.15 kph @ 102.09 msec

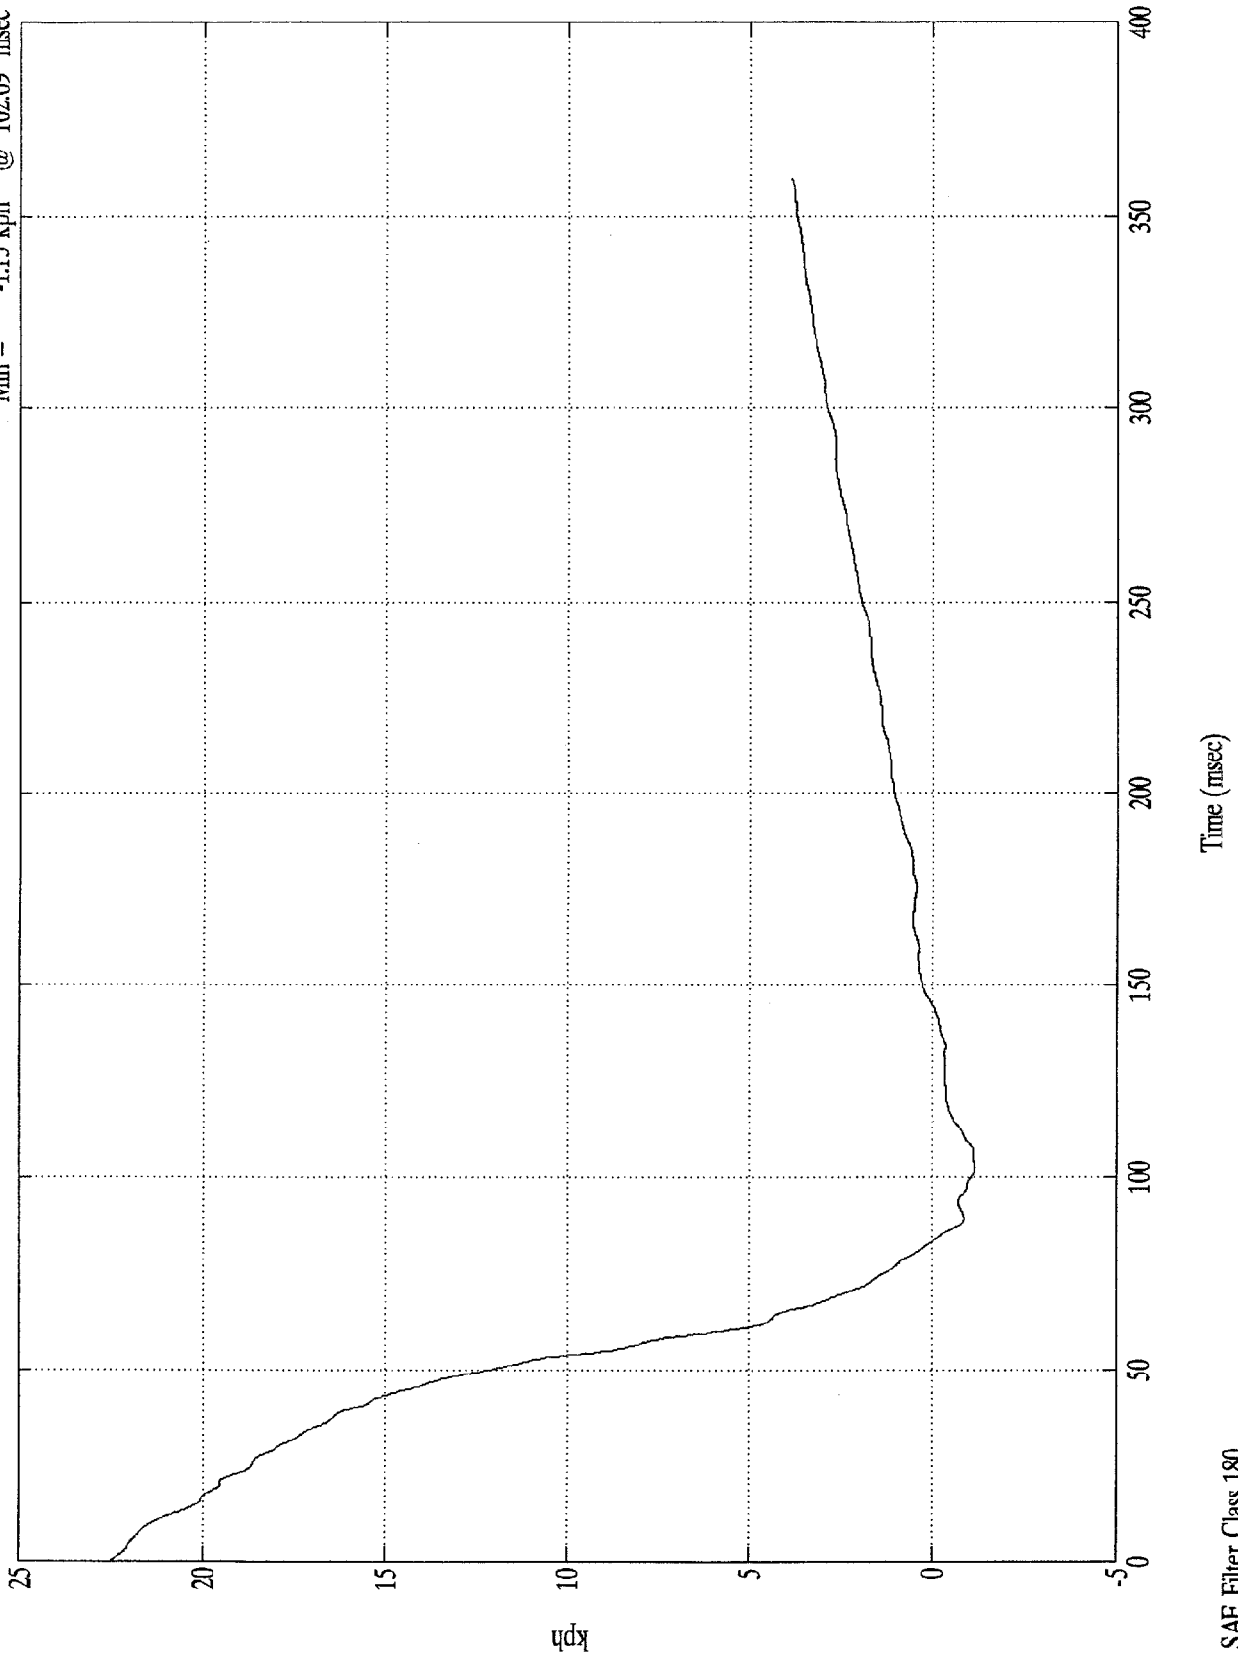

VTV TEST Ford Escort/Olds Cutlass

2nd Integral VI Center X

Max = 405.10 mm @ 359.89 msec
Min = .00 mm @ 0.00 msec

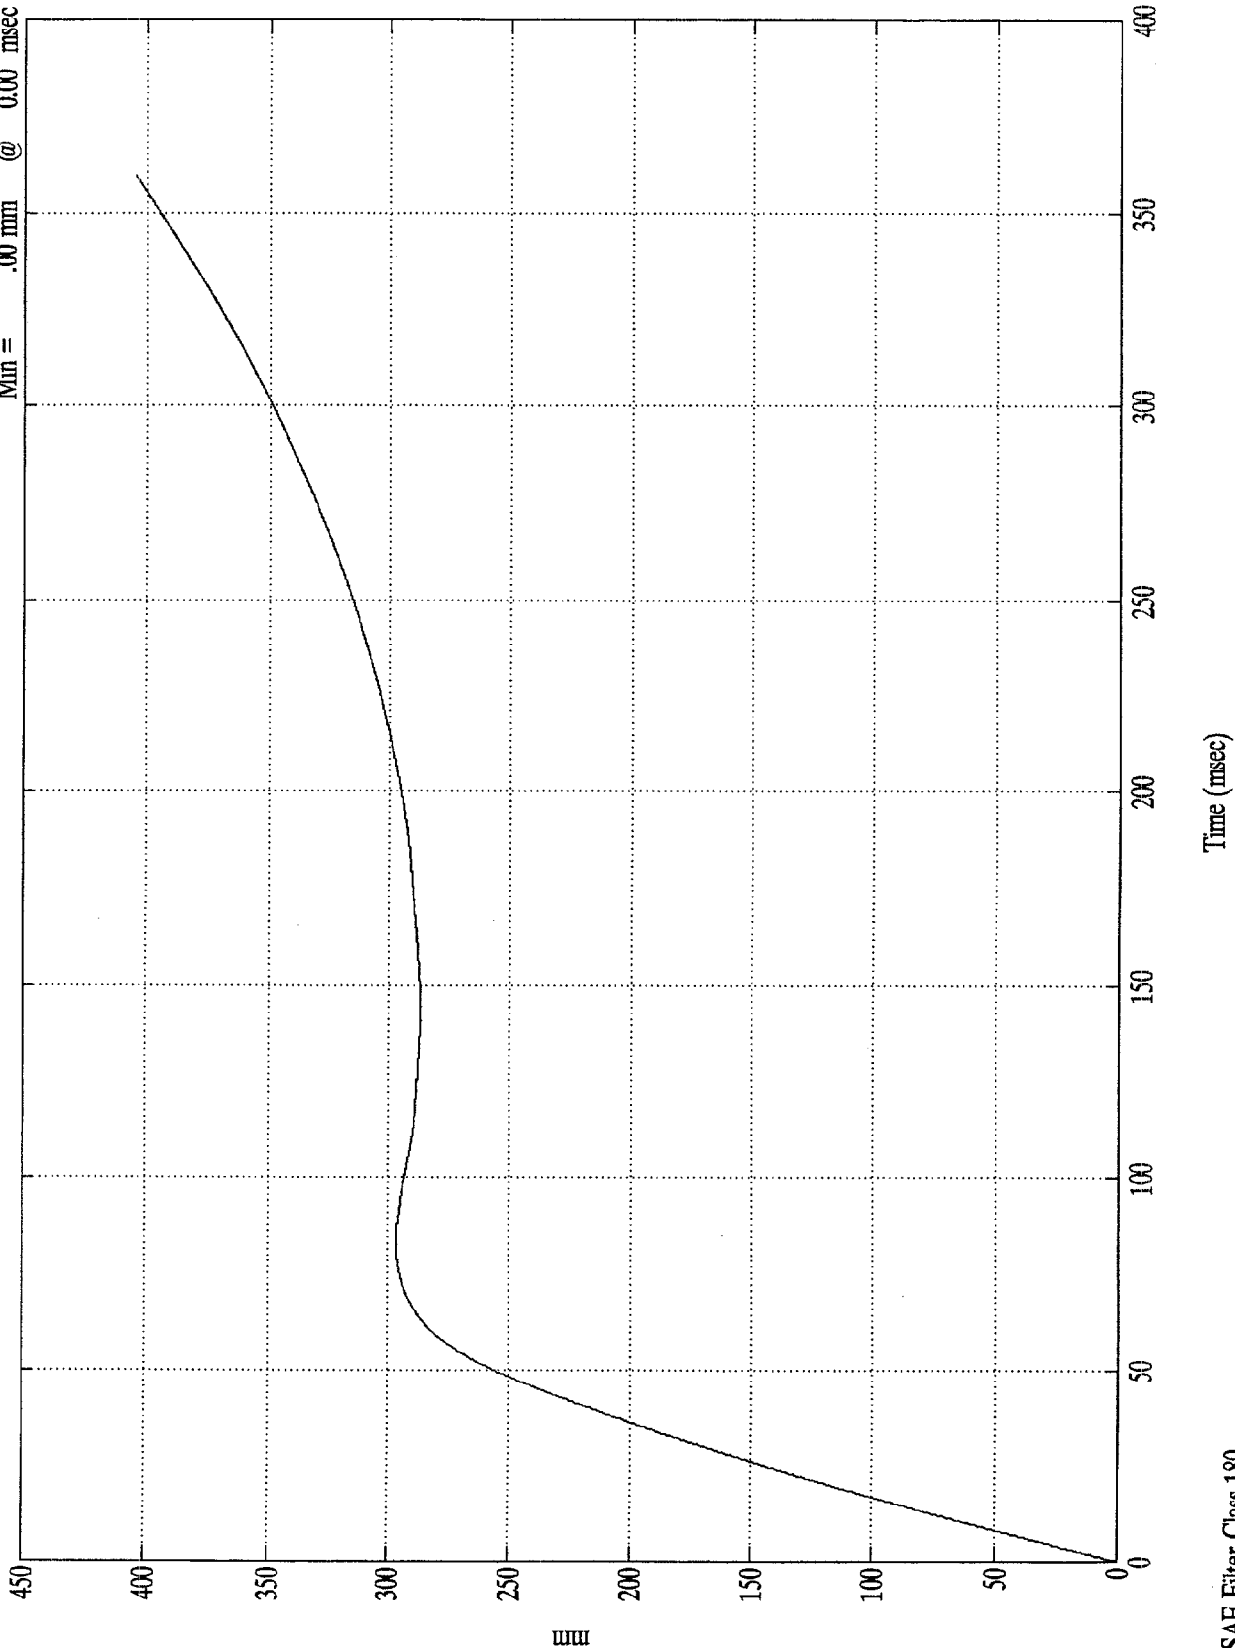


SAE Filter Class 180

mm

VTV TEST Ford Escort/Olds Cutlass

Max = 9.37 Gs @ 40.50 msec
Min = -1.18 Gs @ 121.19 msec


V1 Center Y

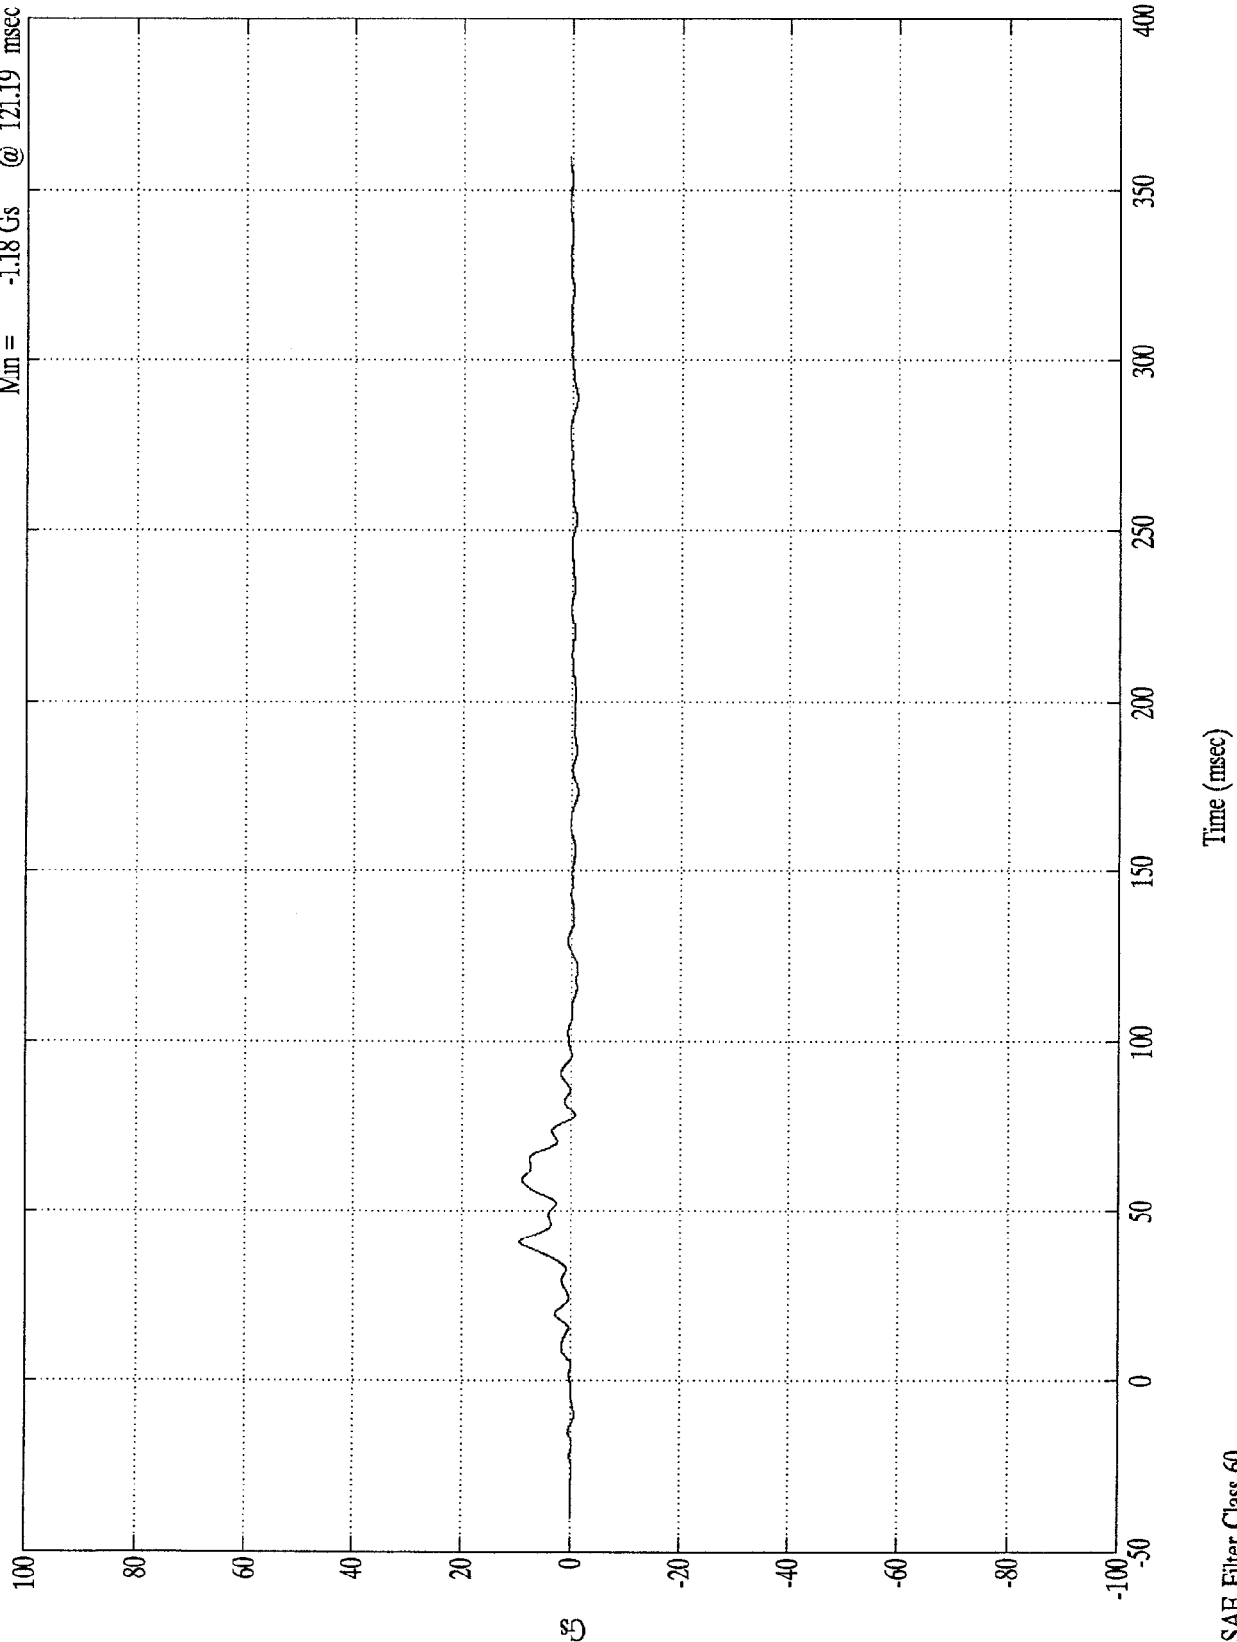

Time (msec)

SAE Filter Class 60


VIV TEST Ford Escort/Olds Cutlass

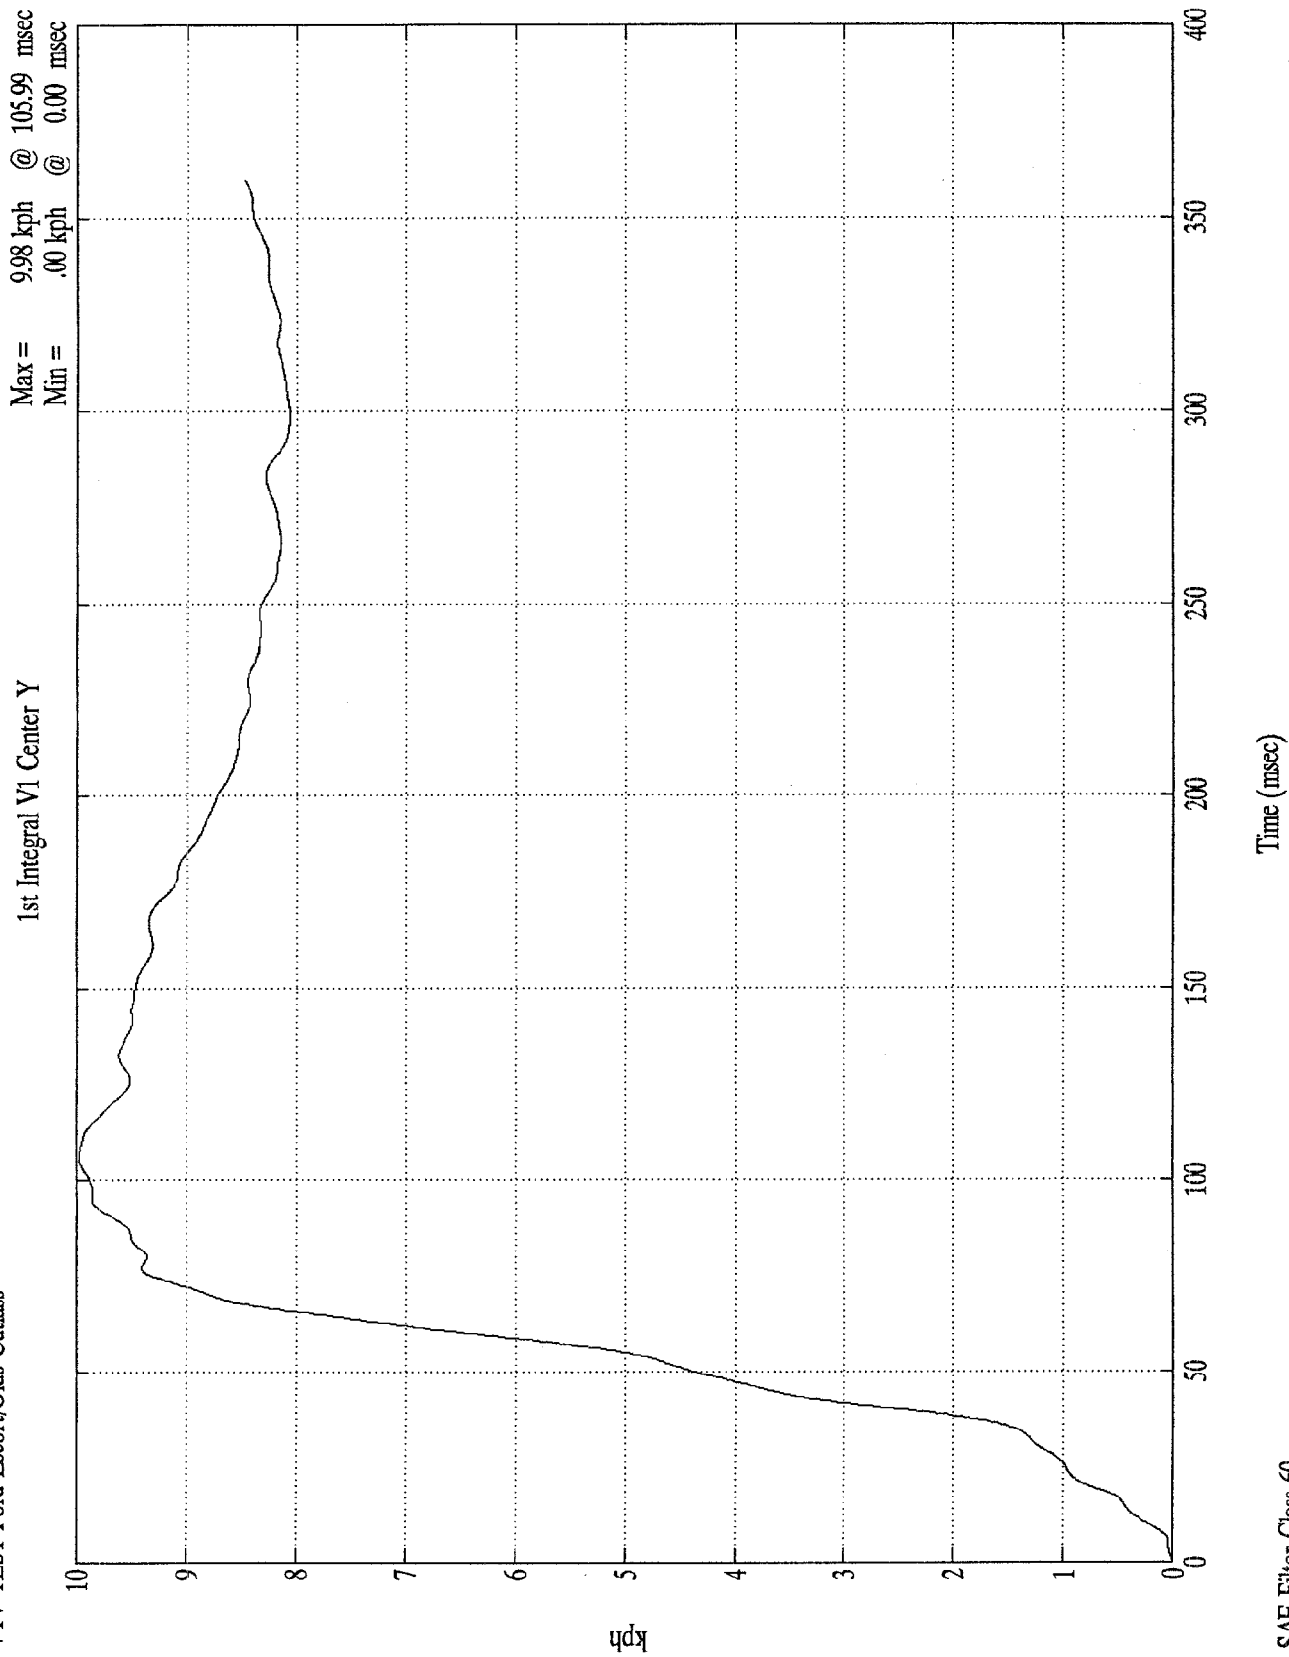

VTV TEST Ford Escort/Olds Cutlass

2nd Integral V1 Center Y

Max = 763.23 mm @ 359.89 msec
Min = .00 mm @ 0.00 msec

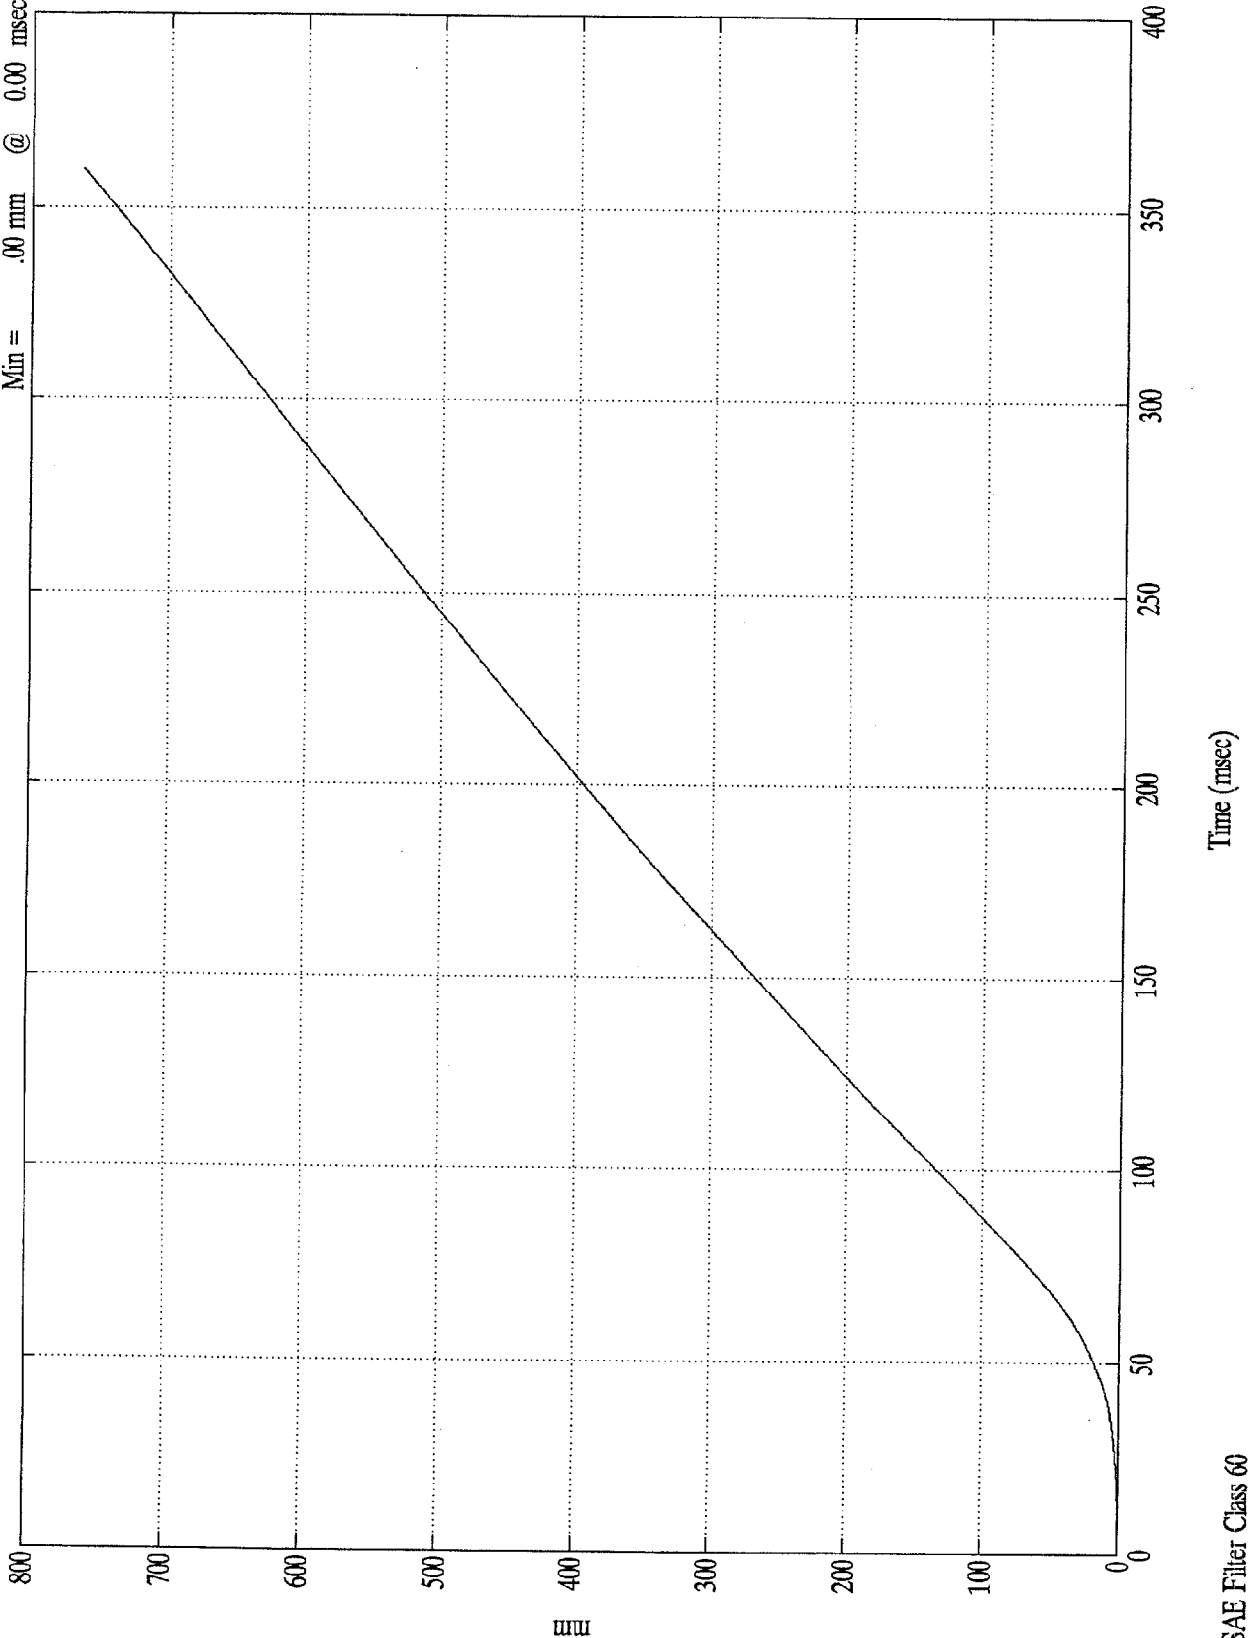


mm

SAE Filter Class 60

VTV TEST Ford Escort/Olds Outlass

Max = 5.65 Gs @ 105.89 msec
Min = -10.52 Gs @ 53.99 msec

V1 Center Z

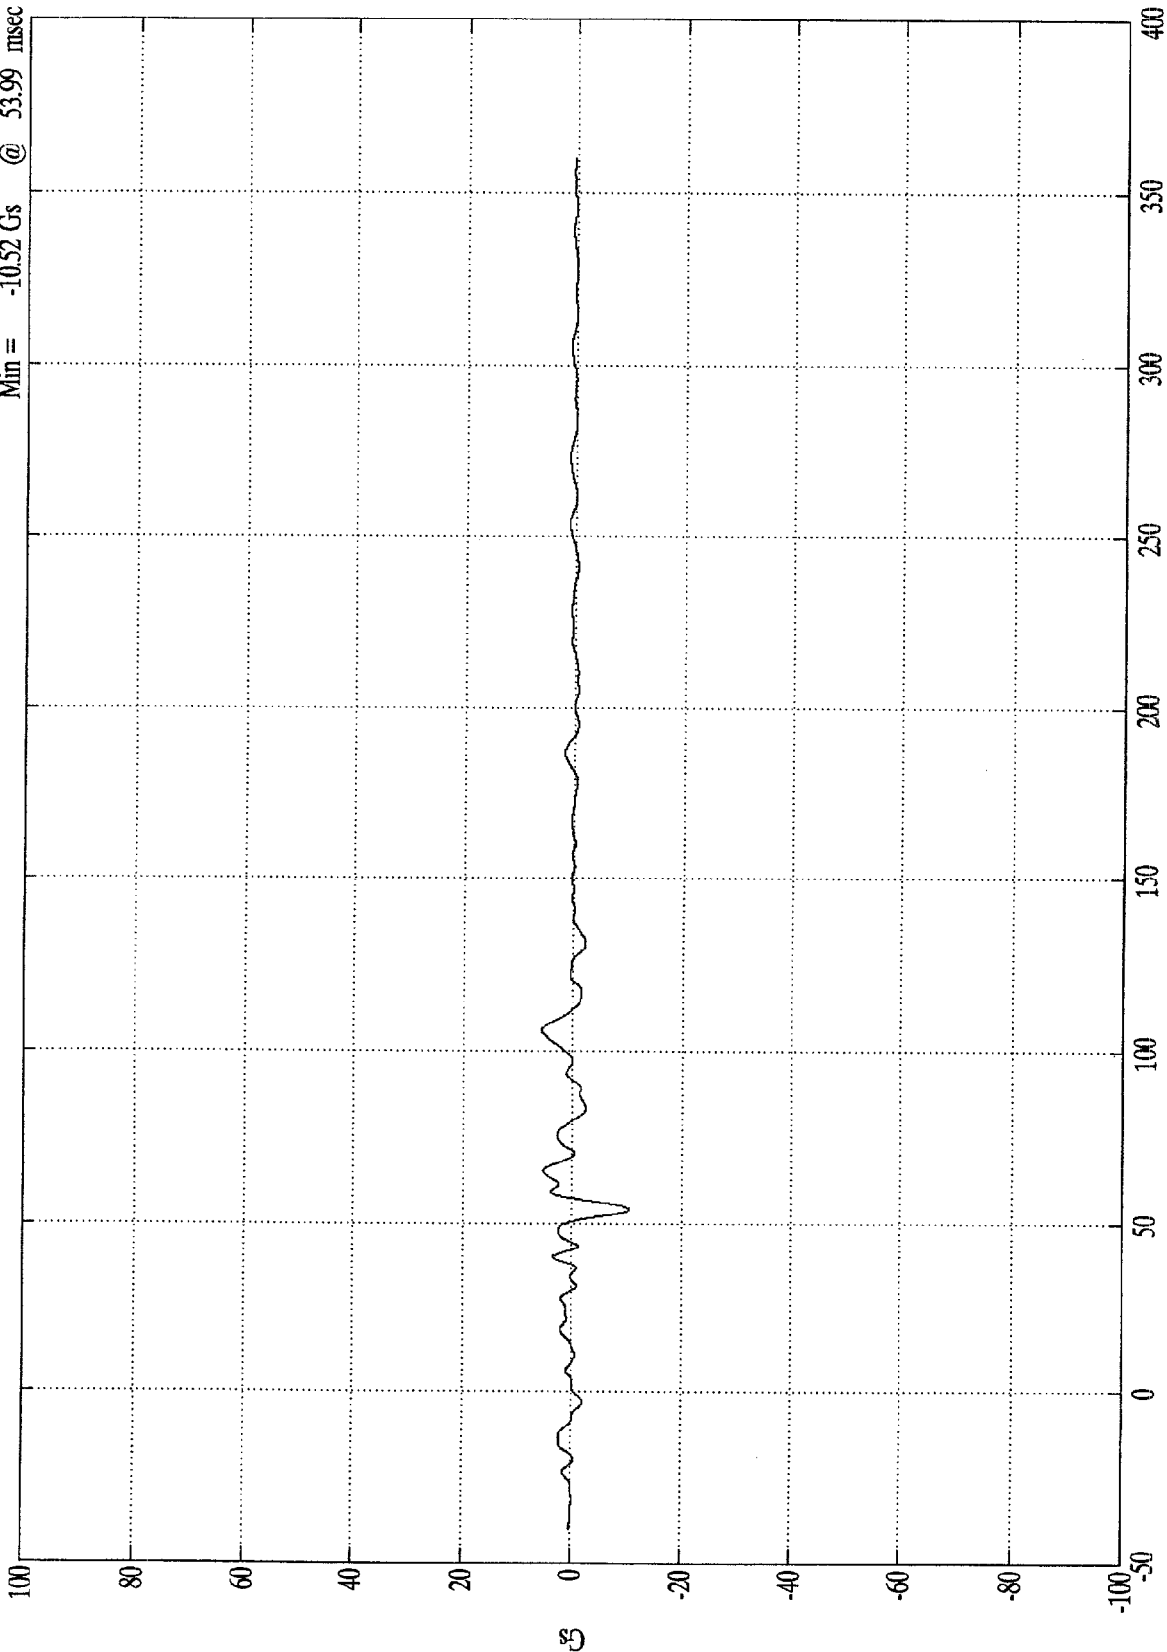


Time (msec)


SAE Filter Class 60

VTV TEST Ford Escort/Olds Cutlass

1st Integral VI Center Z
Max = 4.15 kph @ 359.89 msec
Min = -17 kph @ 57.19 msec

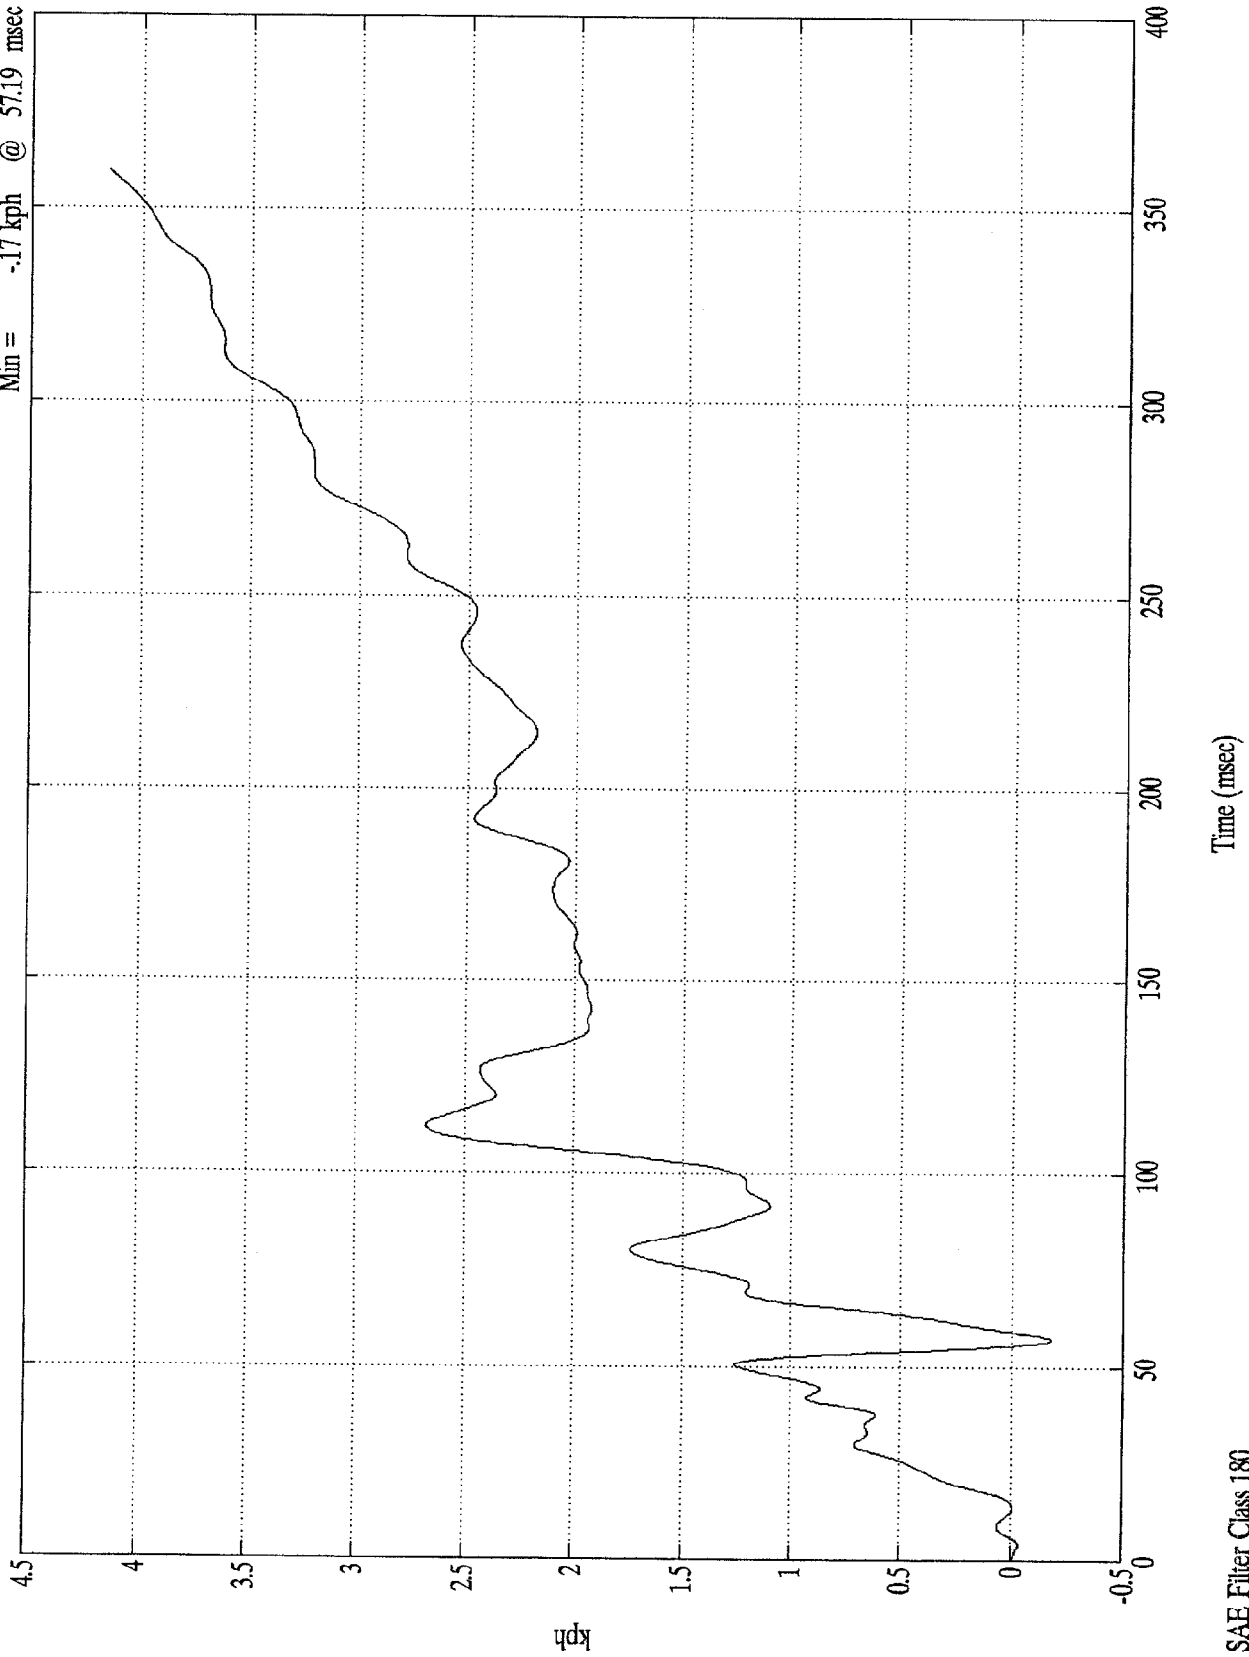


VTV TEST Ford Escort/Olds Cutlass

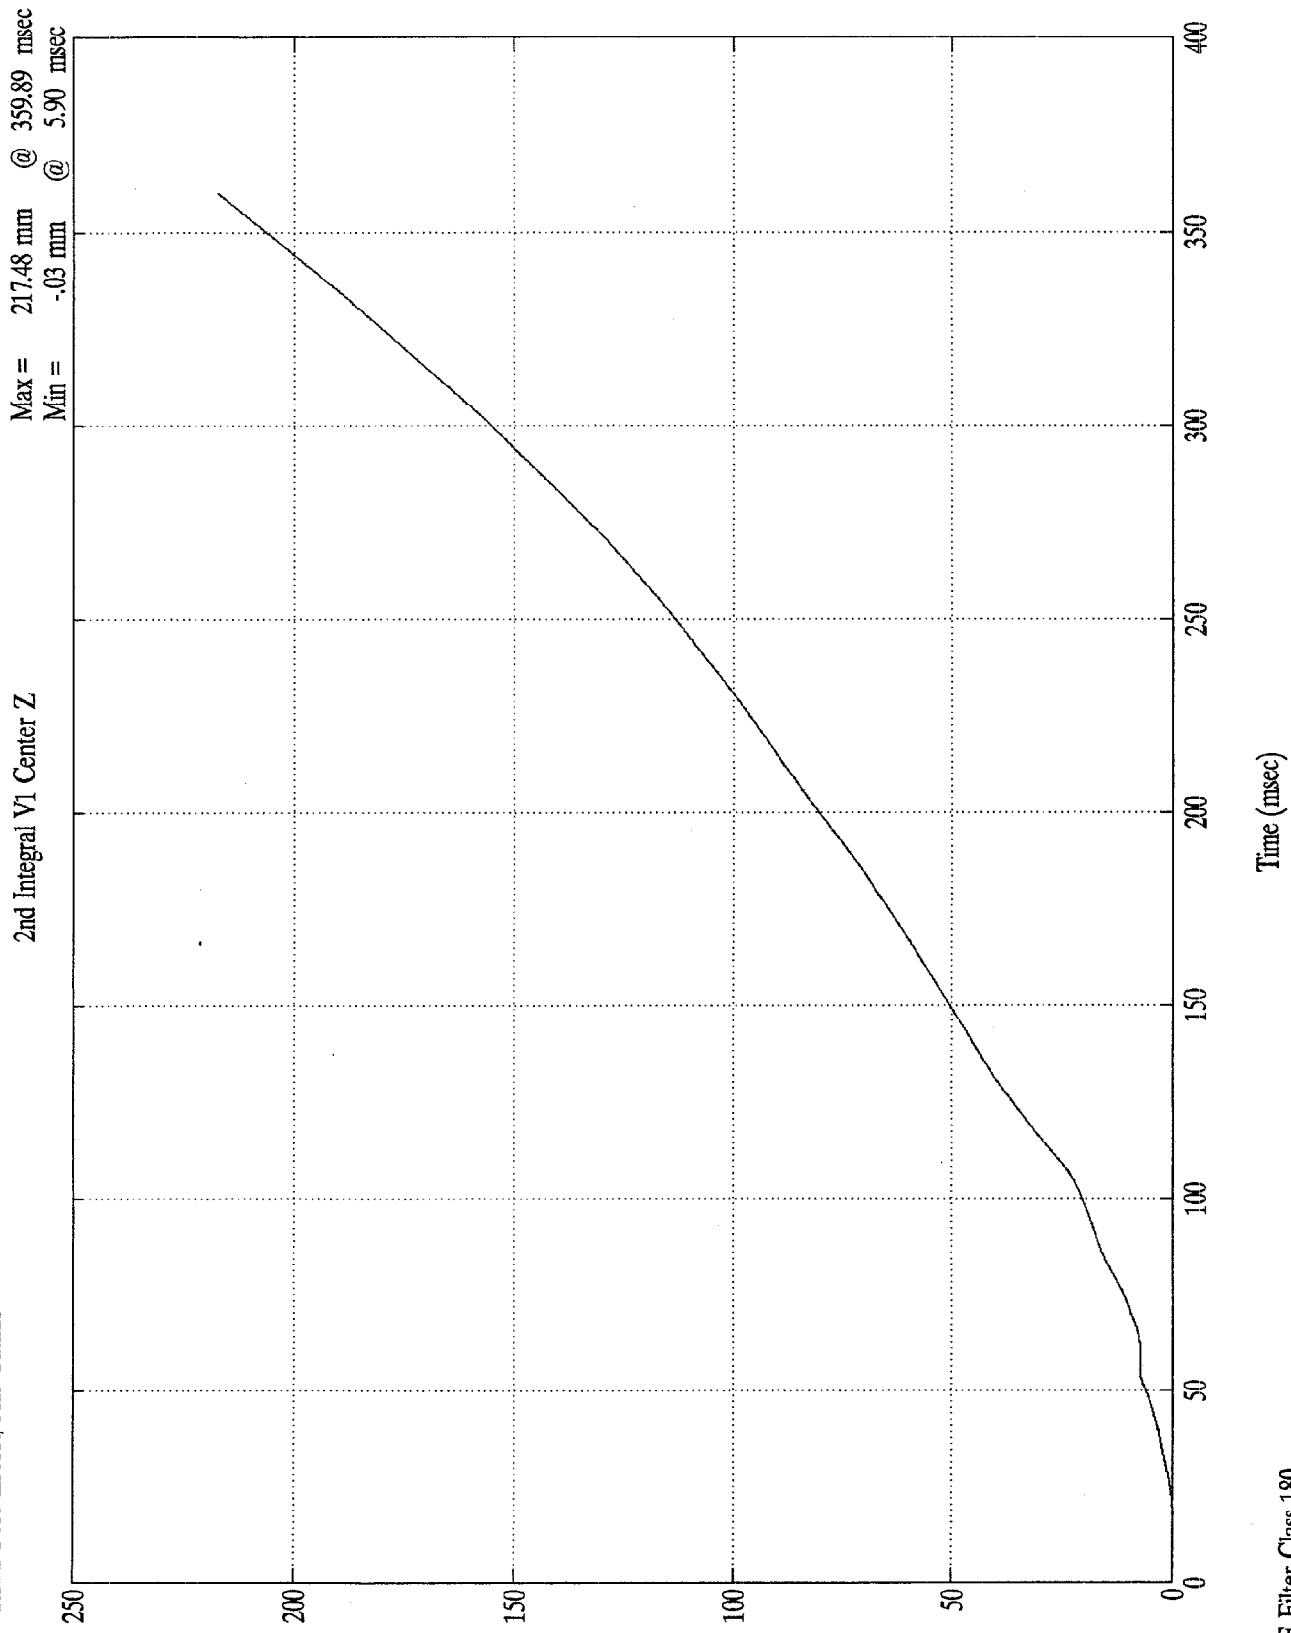

VTV TEST Ford Escort/Olds Cutlass

V1 Right X

Max = 2.93 Gs @ -8.19 msec
Min = -18.35 Gs @ 53.00 msec

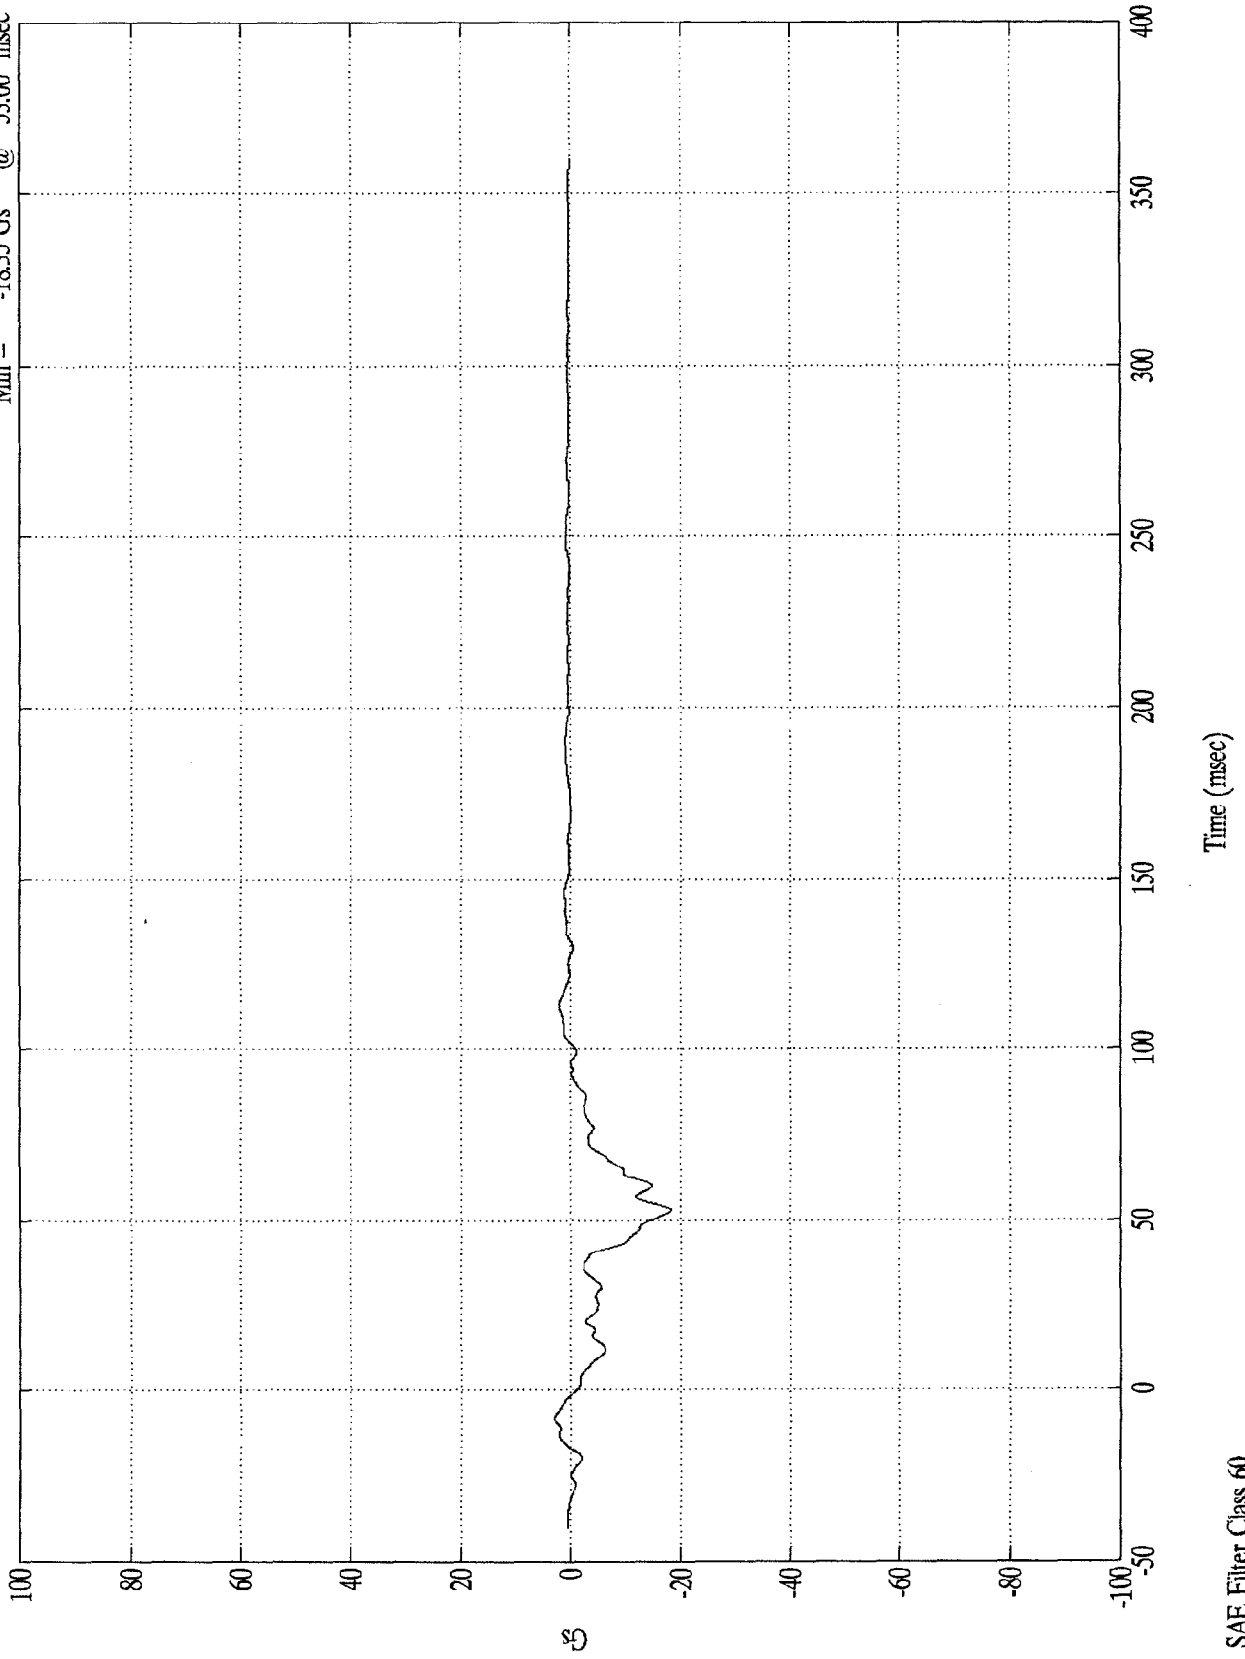

D-18


8404-5

SAE Filter Class 60

VTV TEST Ford Escort/Olds Cutlass

1st Integral V1 Right X

Max = 22.49 kph @ 0.00 msec
Min = 2.50 kph @ 101.50 msec

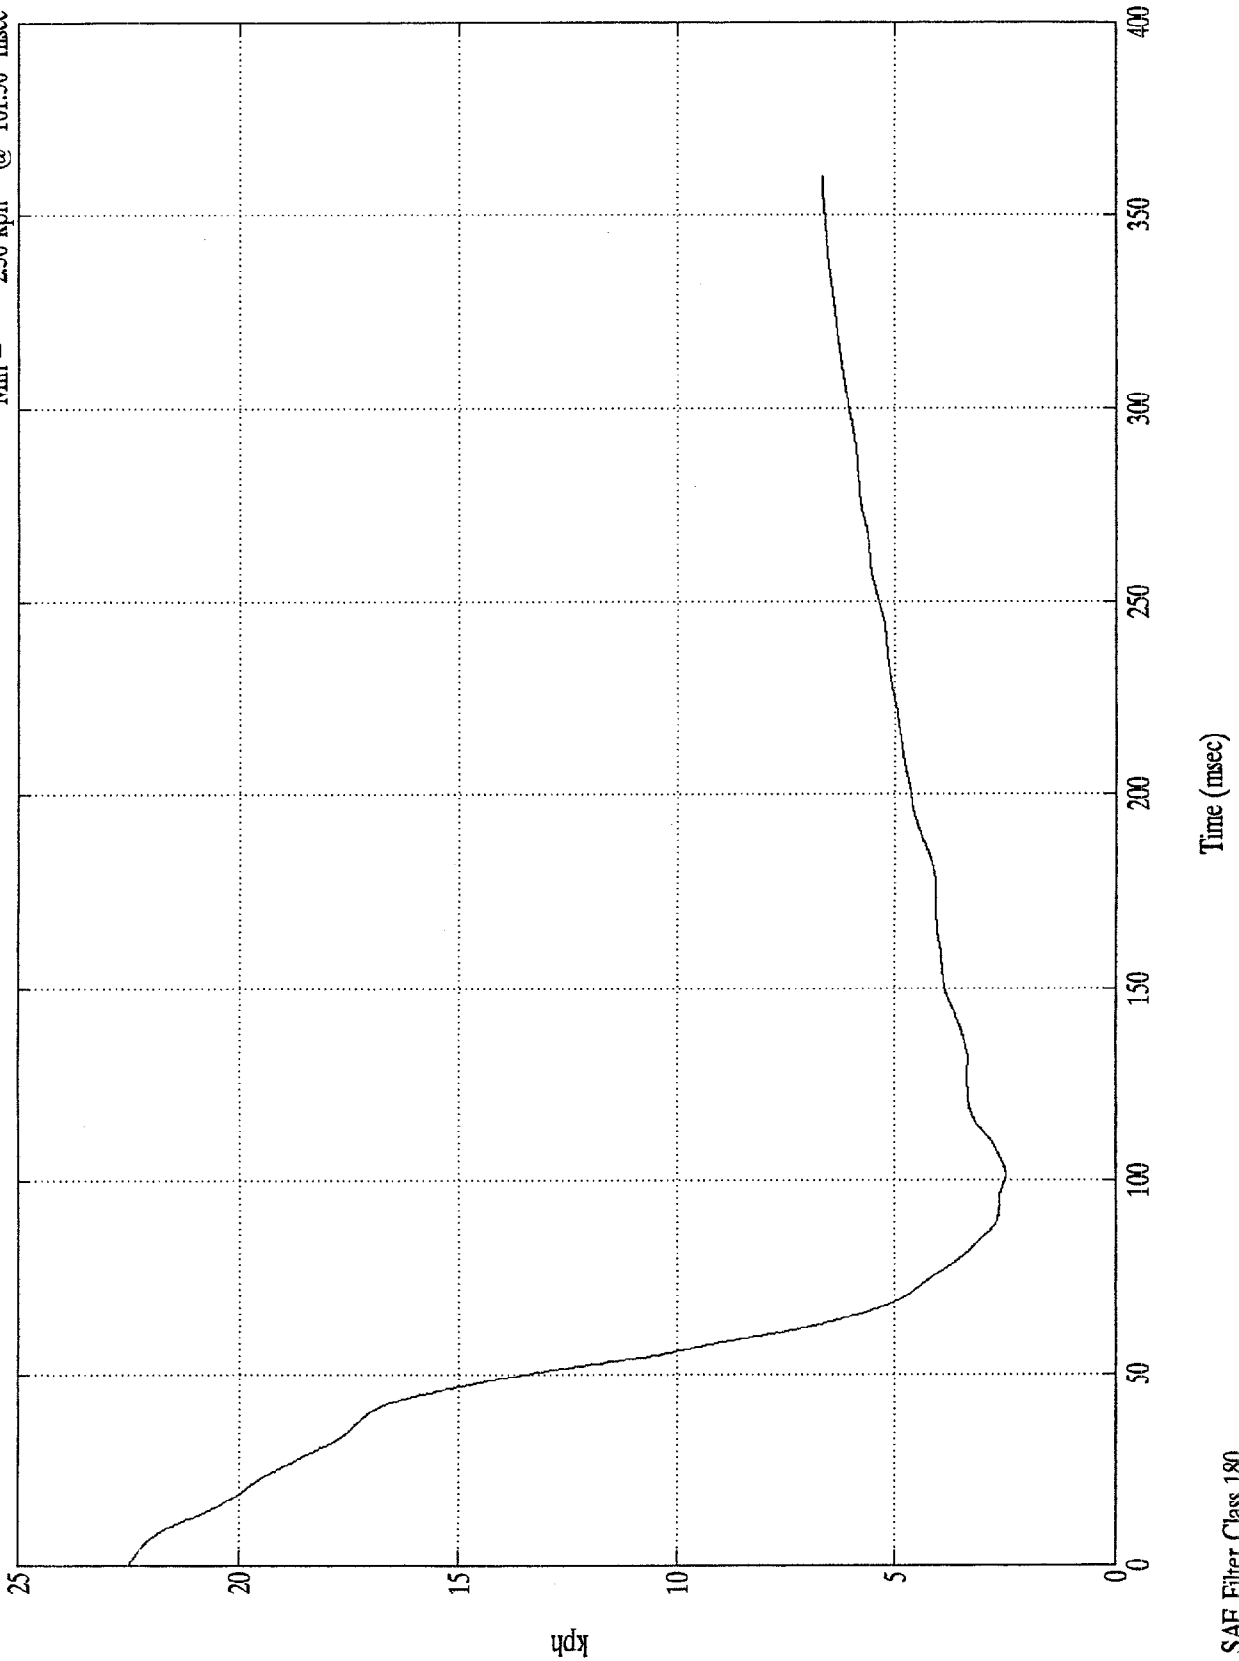

kph


Time (msec)

SAE Filter Class 180

VTV TEST Ford Escort/Olds Cutlass

Max = 696.89 mm @ 359.89 msec
Min = .00 mm @ 0.00 msec

2nd Integral V1 Right X

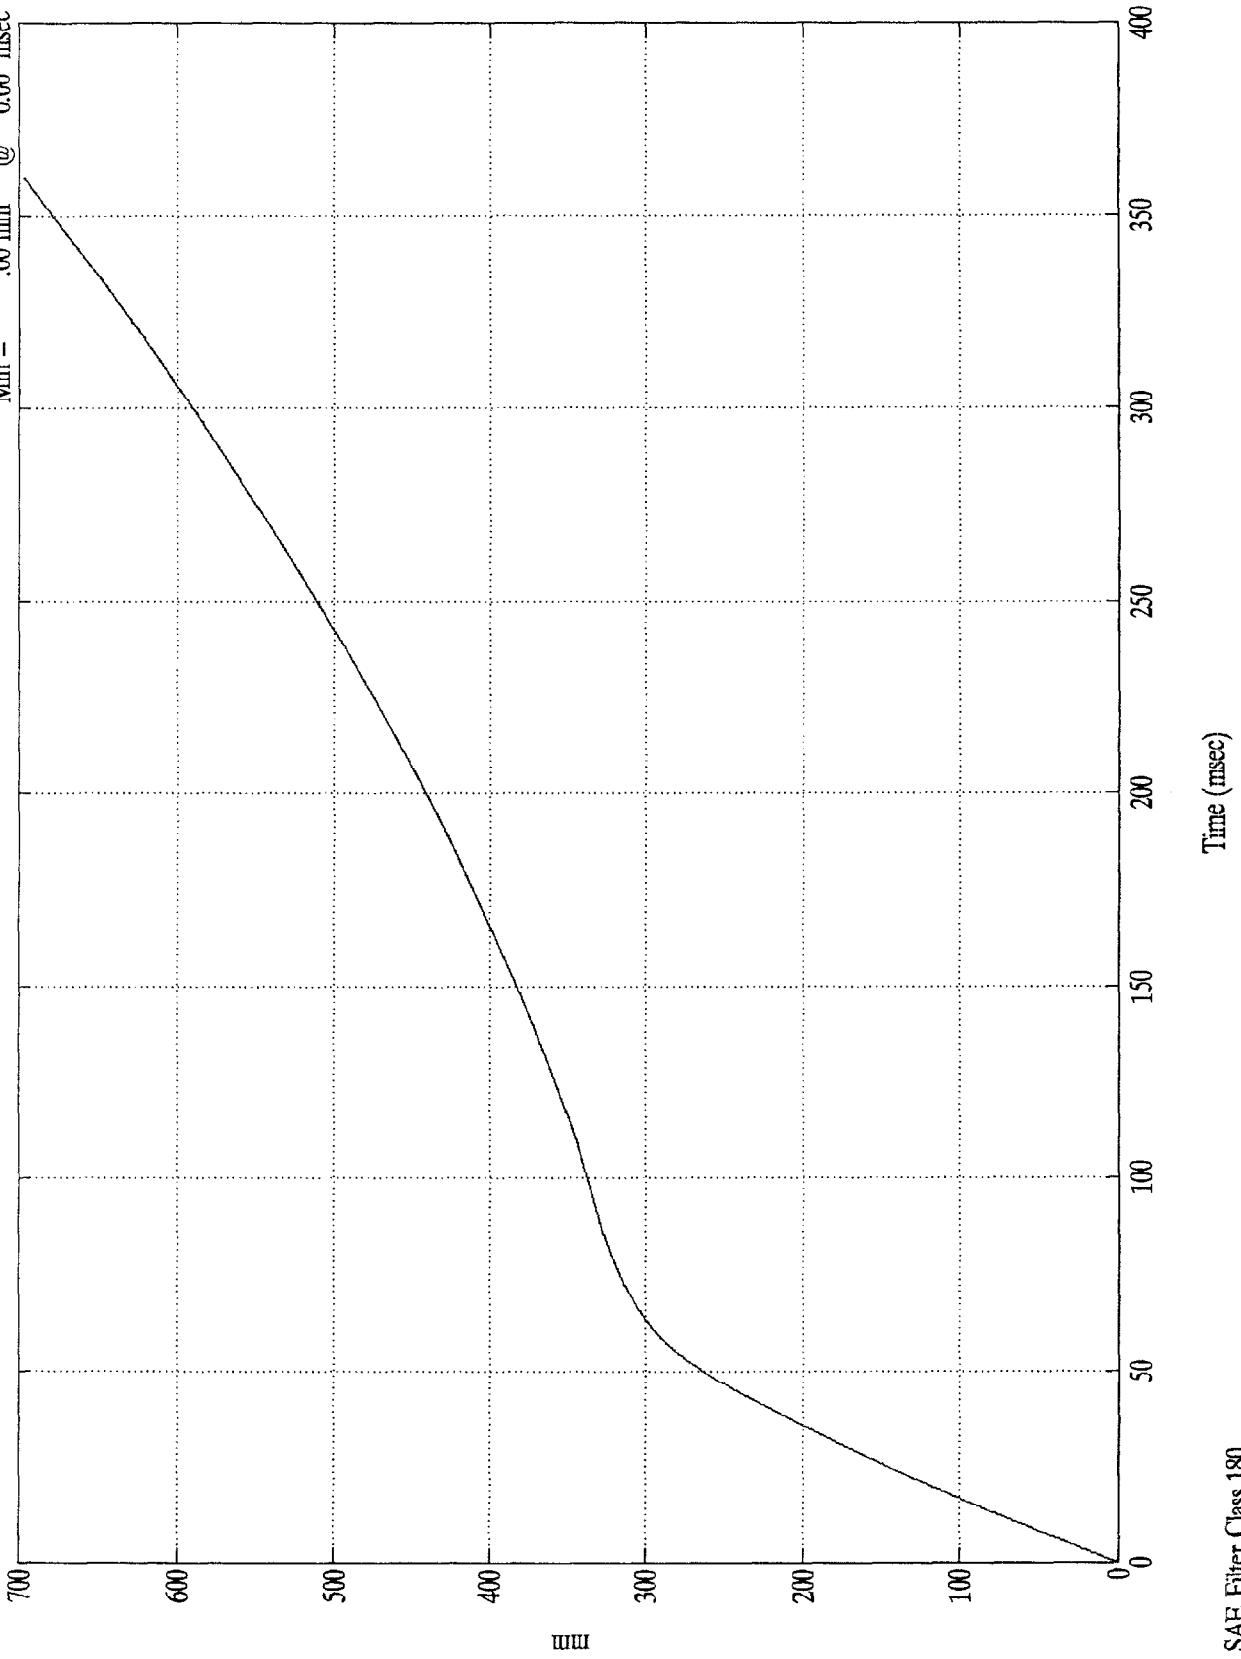


mm

VTV TEST Ford Escort/Olds Cutlass

V1 Right Y


Max = 8.86 Gs @ 40.59 msec
Min = -1.05 Gs @ 115.79 msec

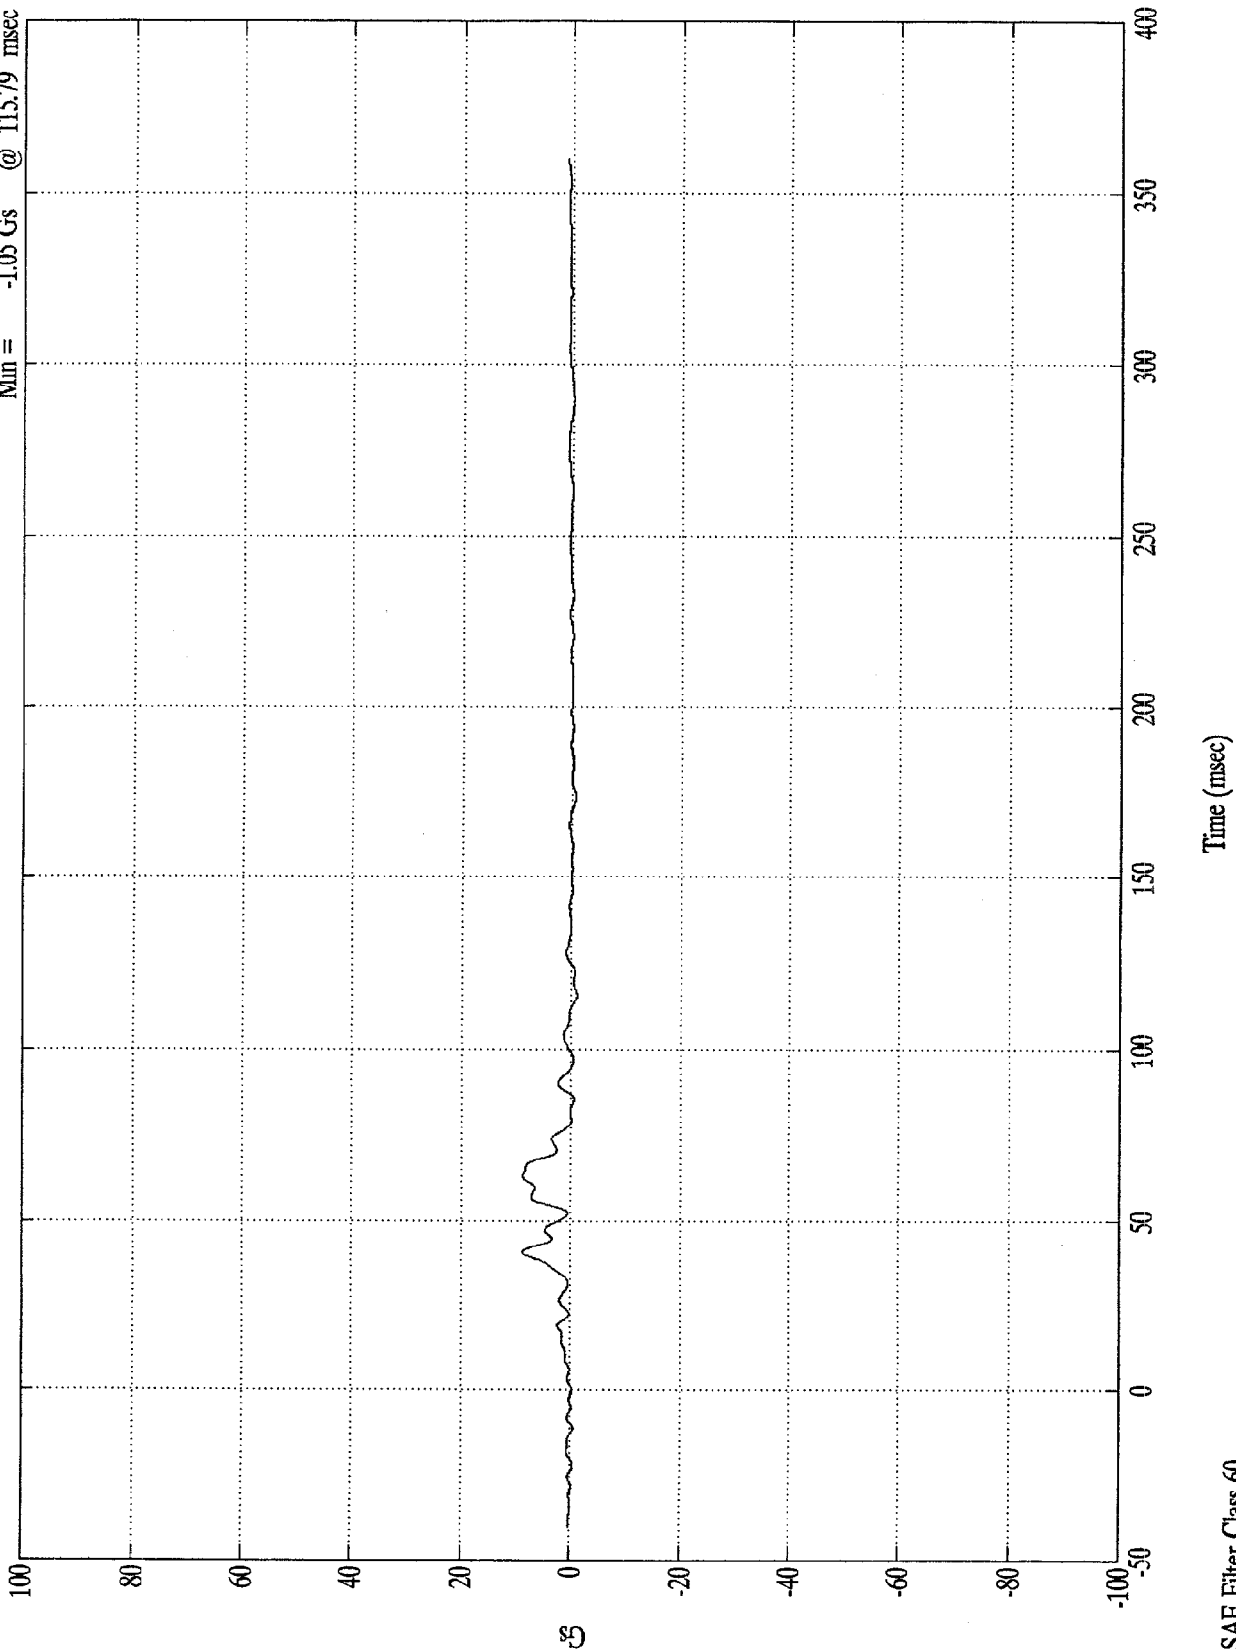

VTV TEST Ford Escort/Olds Cutlass

Max = 9.98 kph @ 105.99 msec
Min = .00 kph @ 0.00 msec


1st Integral V1 Center Y

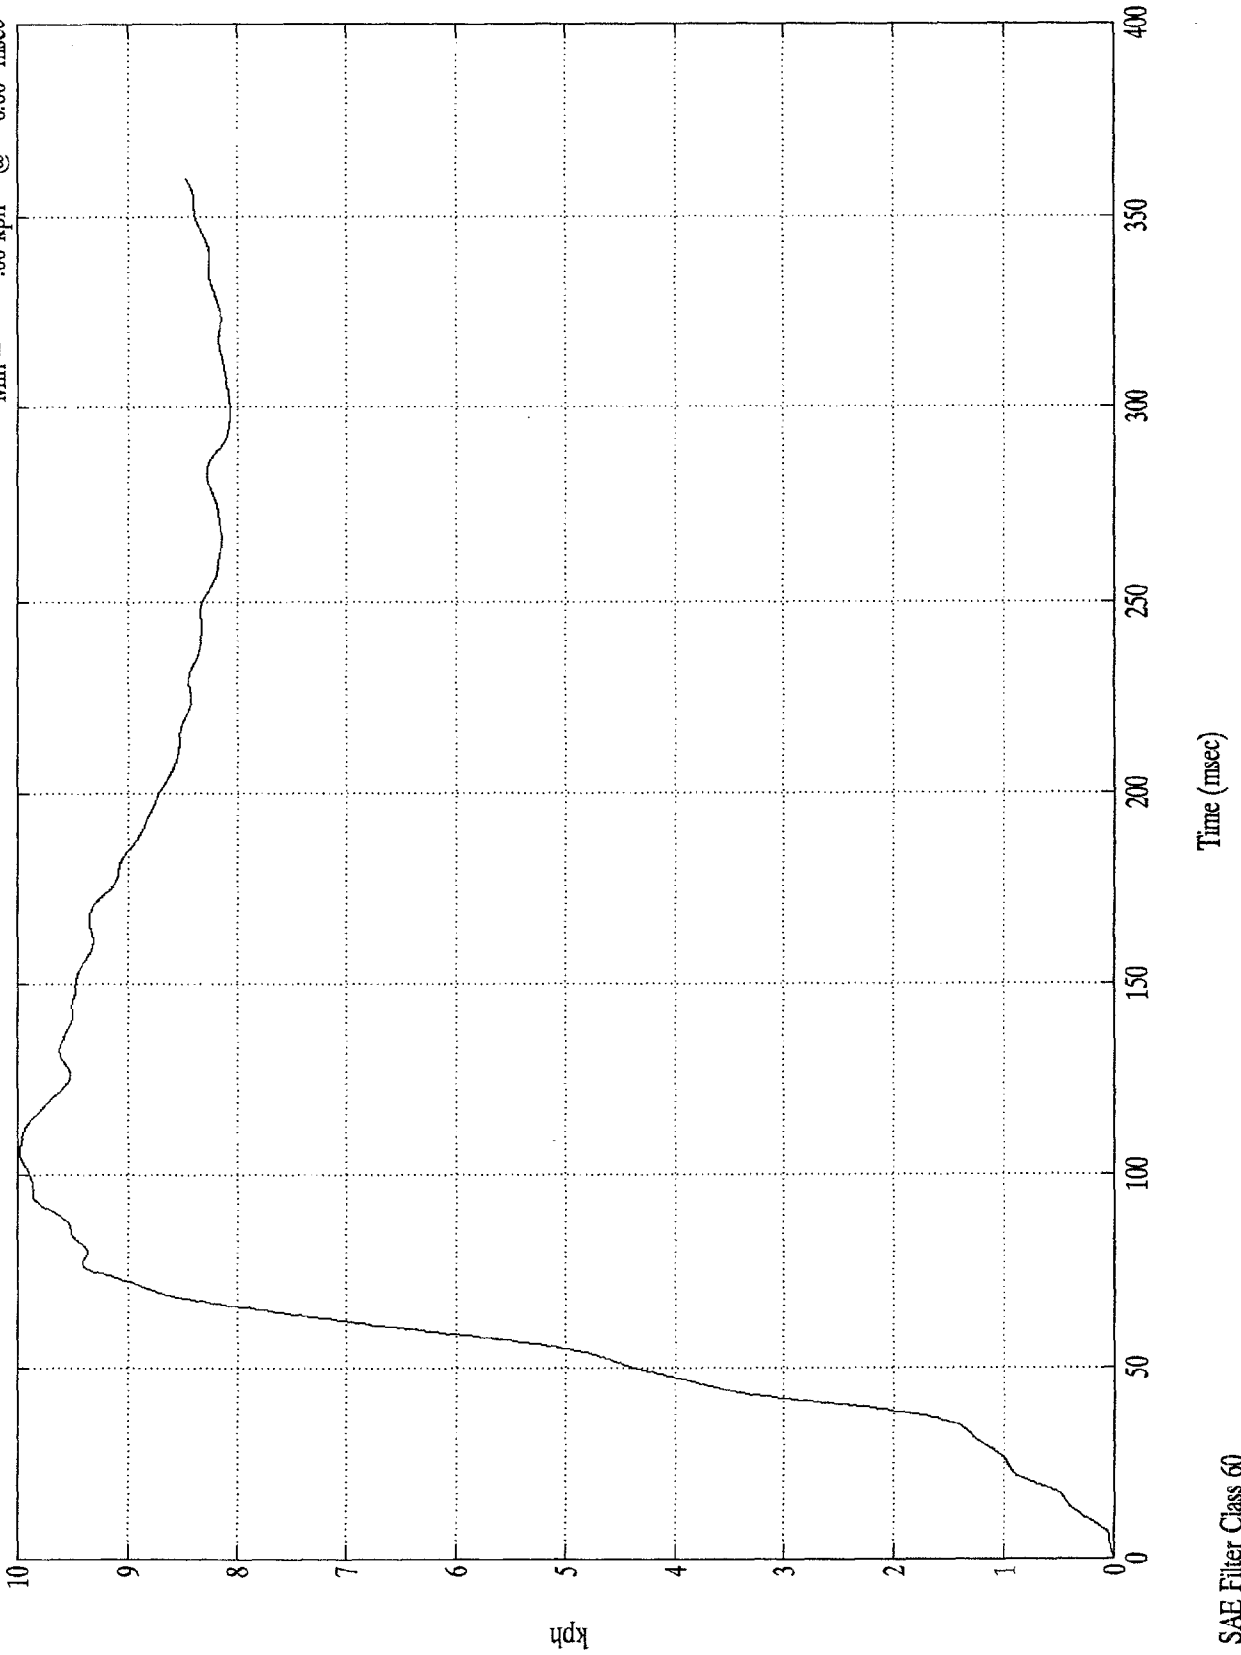

VTV TEST Ford Escort/Olds Cutlass

2nd Integral V1 Center Y

Max = 763.23 mm @ 359.89 msec
Min = .00 mm @ 0.00 msec

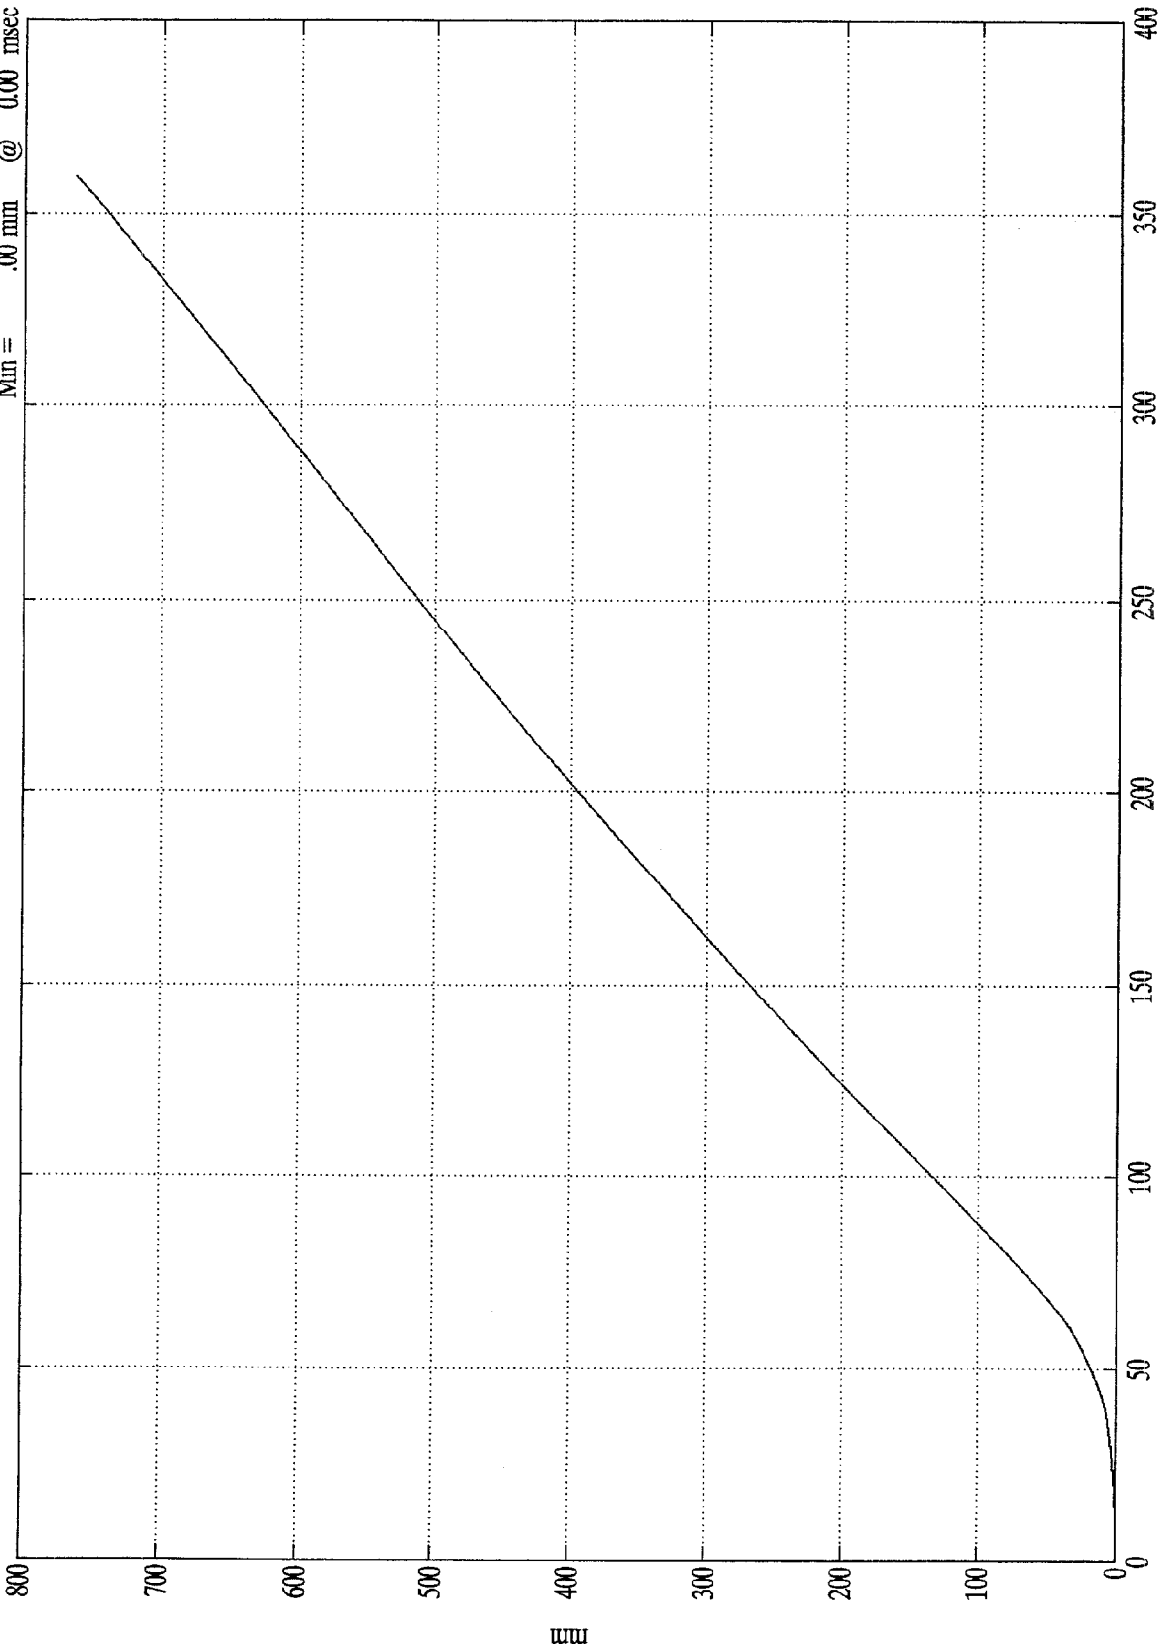

Time (msec)


SAE Filter Class 60

mm

VTV TEST Ford Escort/Olds Cutlass

1st Integral V1 Right Y


Max = 11.02 kph @ 359.89 msec
Min = -0.00 kph @ 1.20 msec

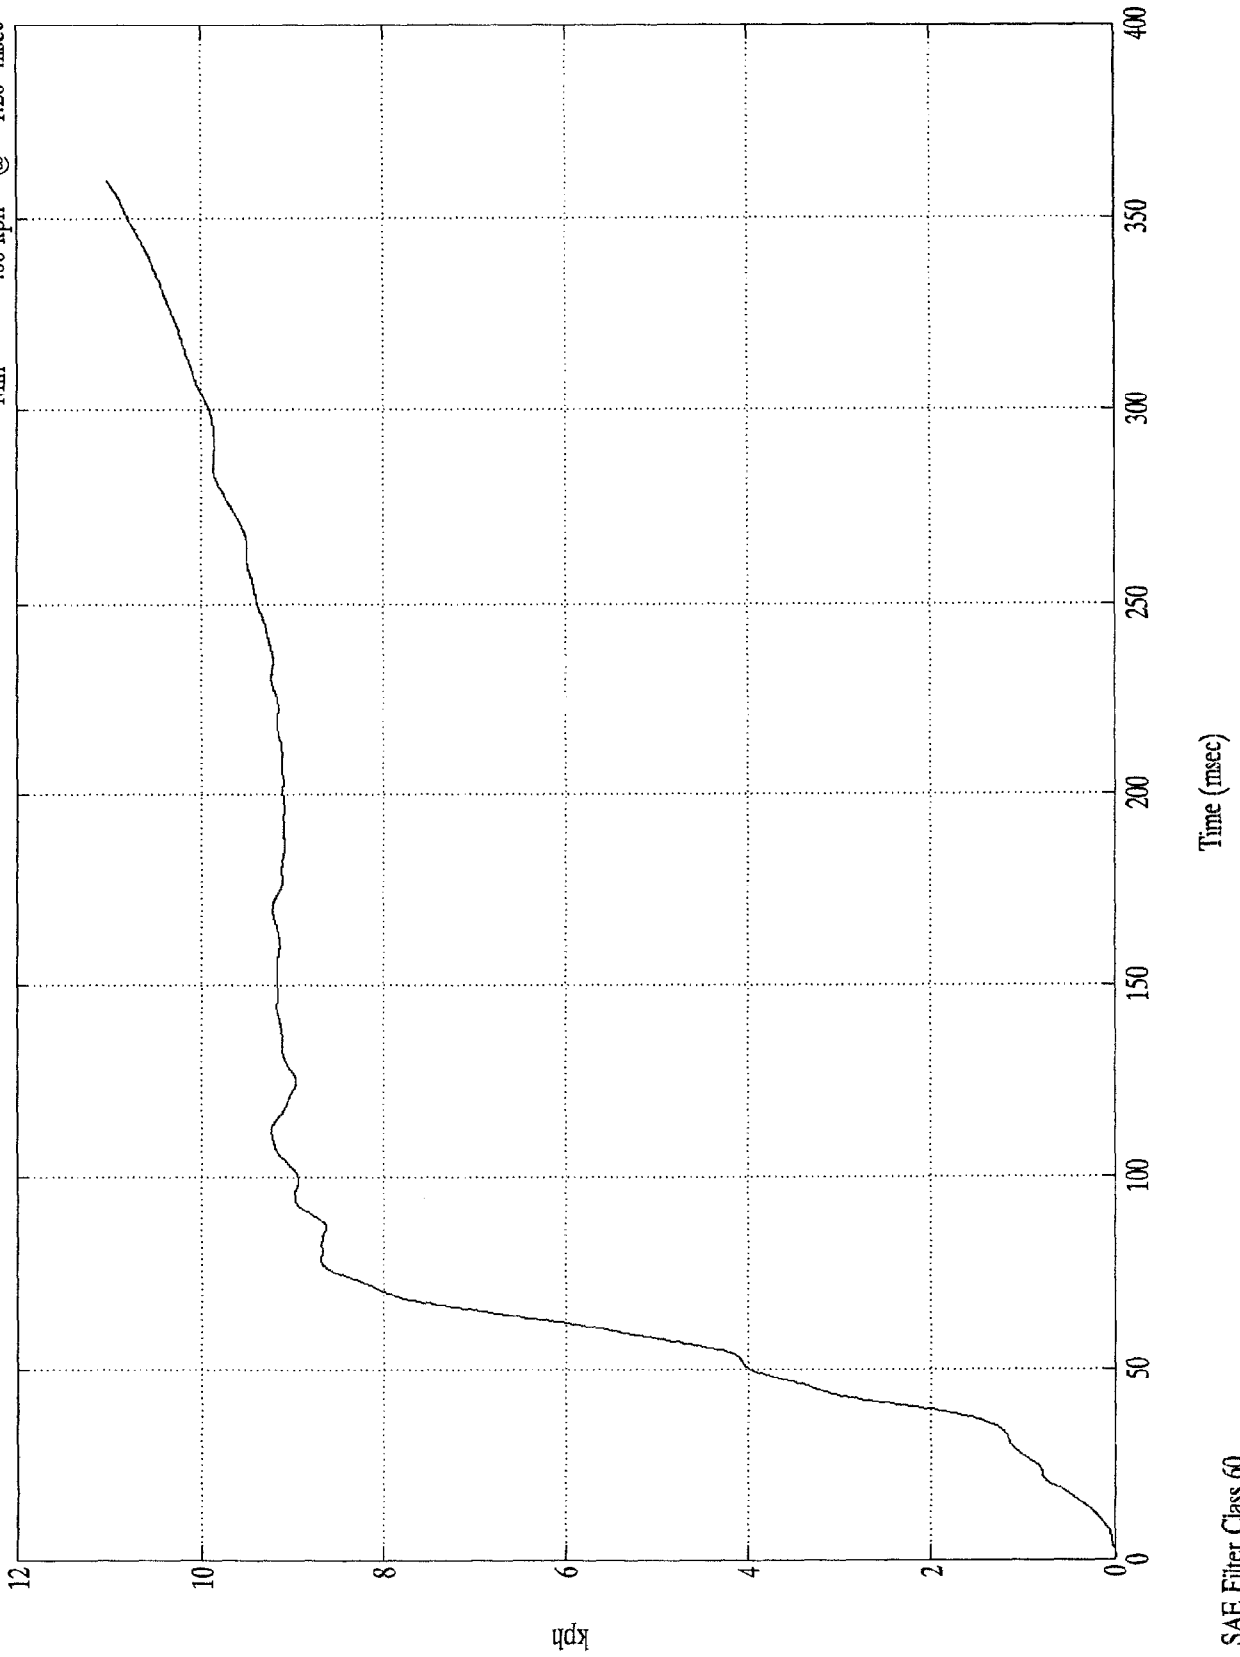

VTV TEST Ford Escort/Olds Cutlass

2nd Integral V1 Right Y

Max = 809.66 mm @ 359.89 msec
Min = -0.00 mm @ 2.30 msec

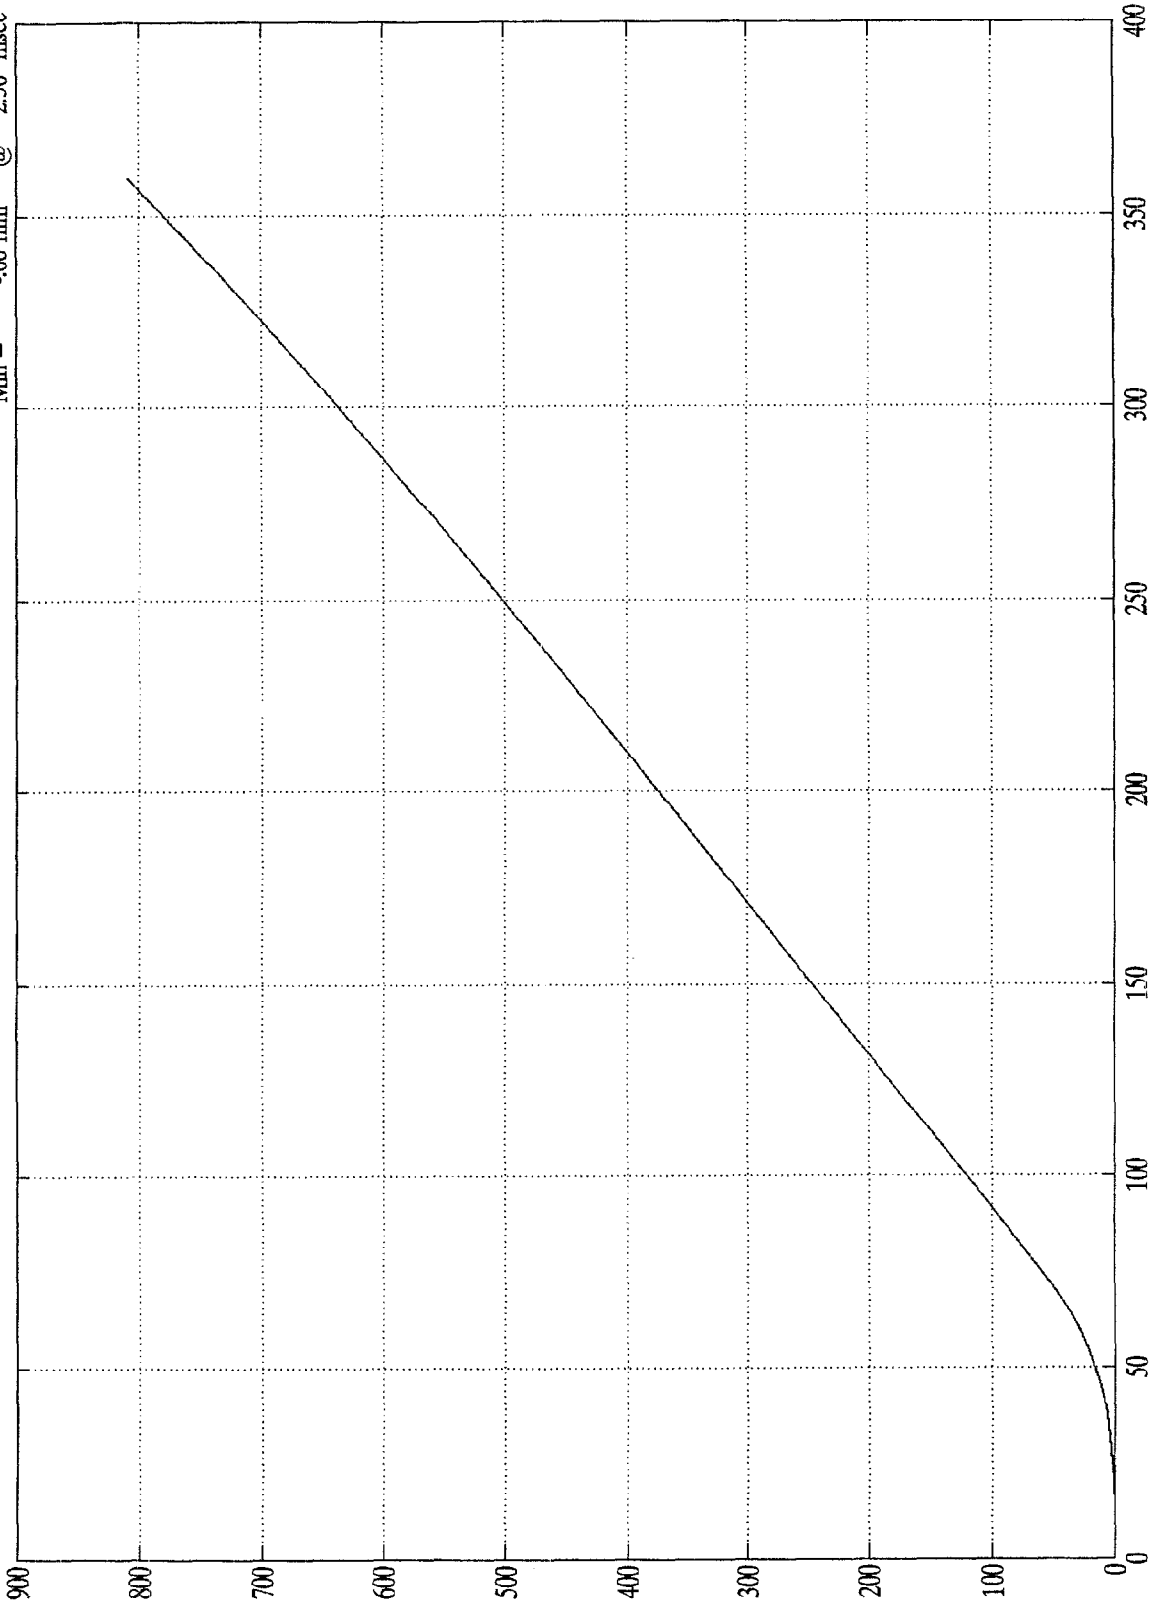

Time (msec)


mm

SAE Filter Class 60

VTV TEST Ford Escort/Olds Cutlass

1st Integral V1 Right Y

Max = 11.02 kph @ 359.89 msec
Min = -0.00 kph @ 1.20 msec

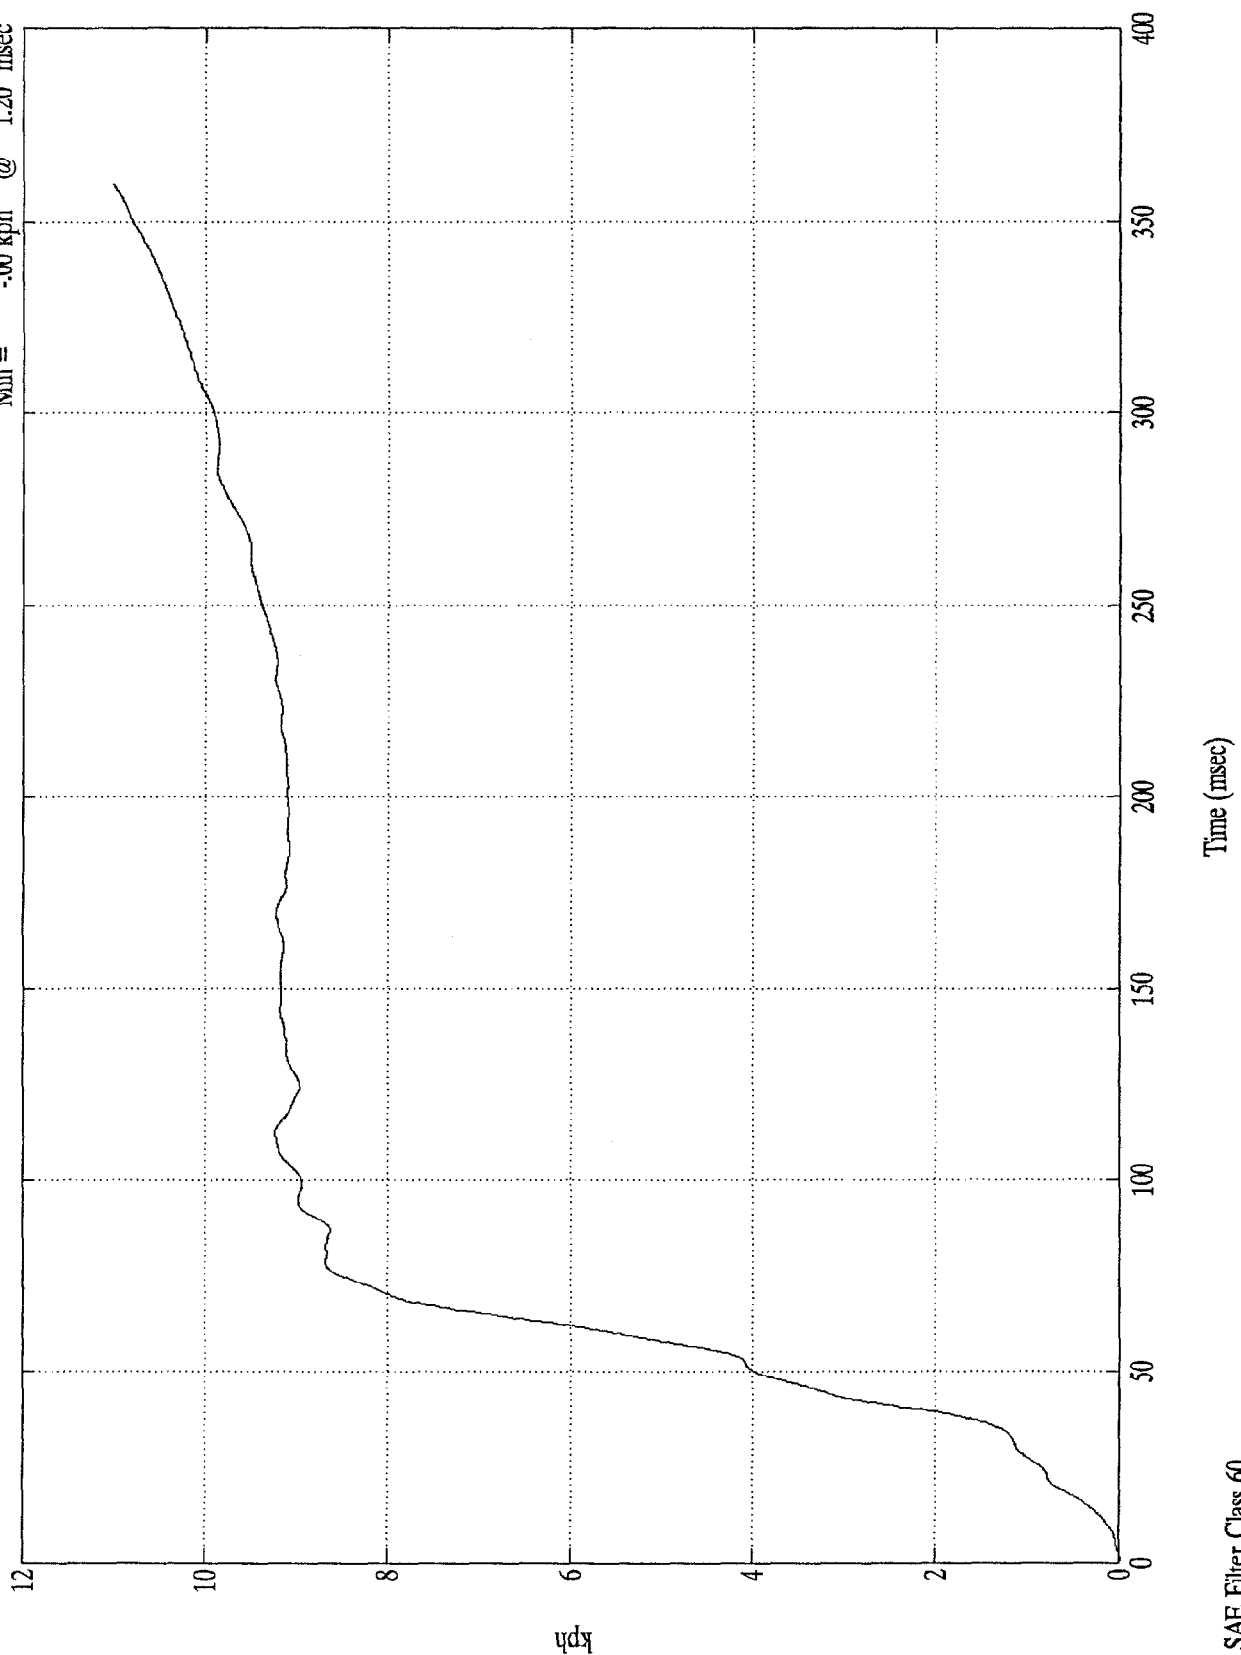


SAE Filter Class 60

VTV TEST Ford Escort/Olds Cutlass

2nd Integral V1 Right Y

Max = 809.66 mm @ 359.89 msec
Min = -0.00 mm @ 2.30 msec

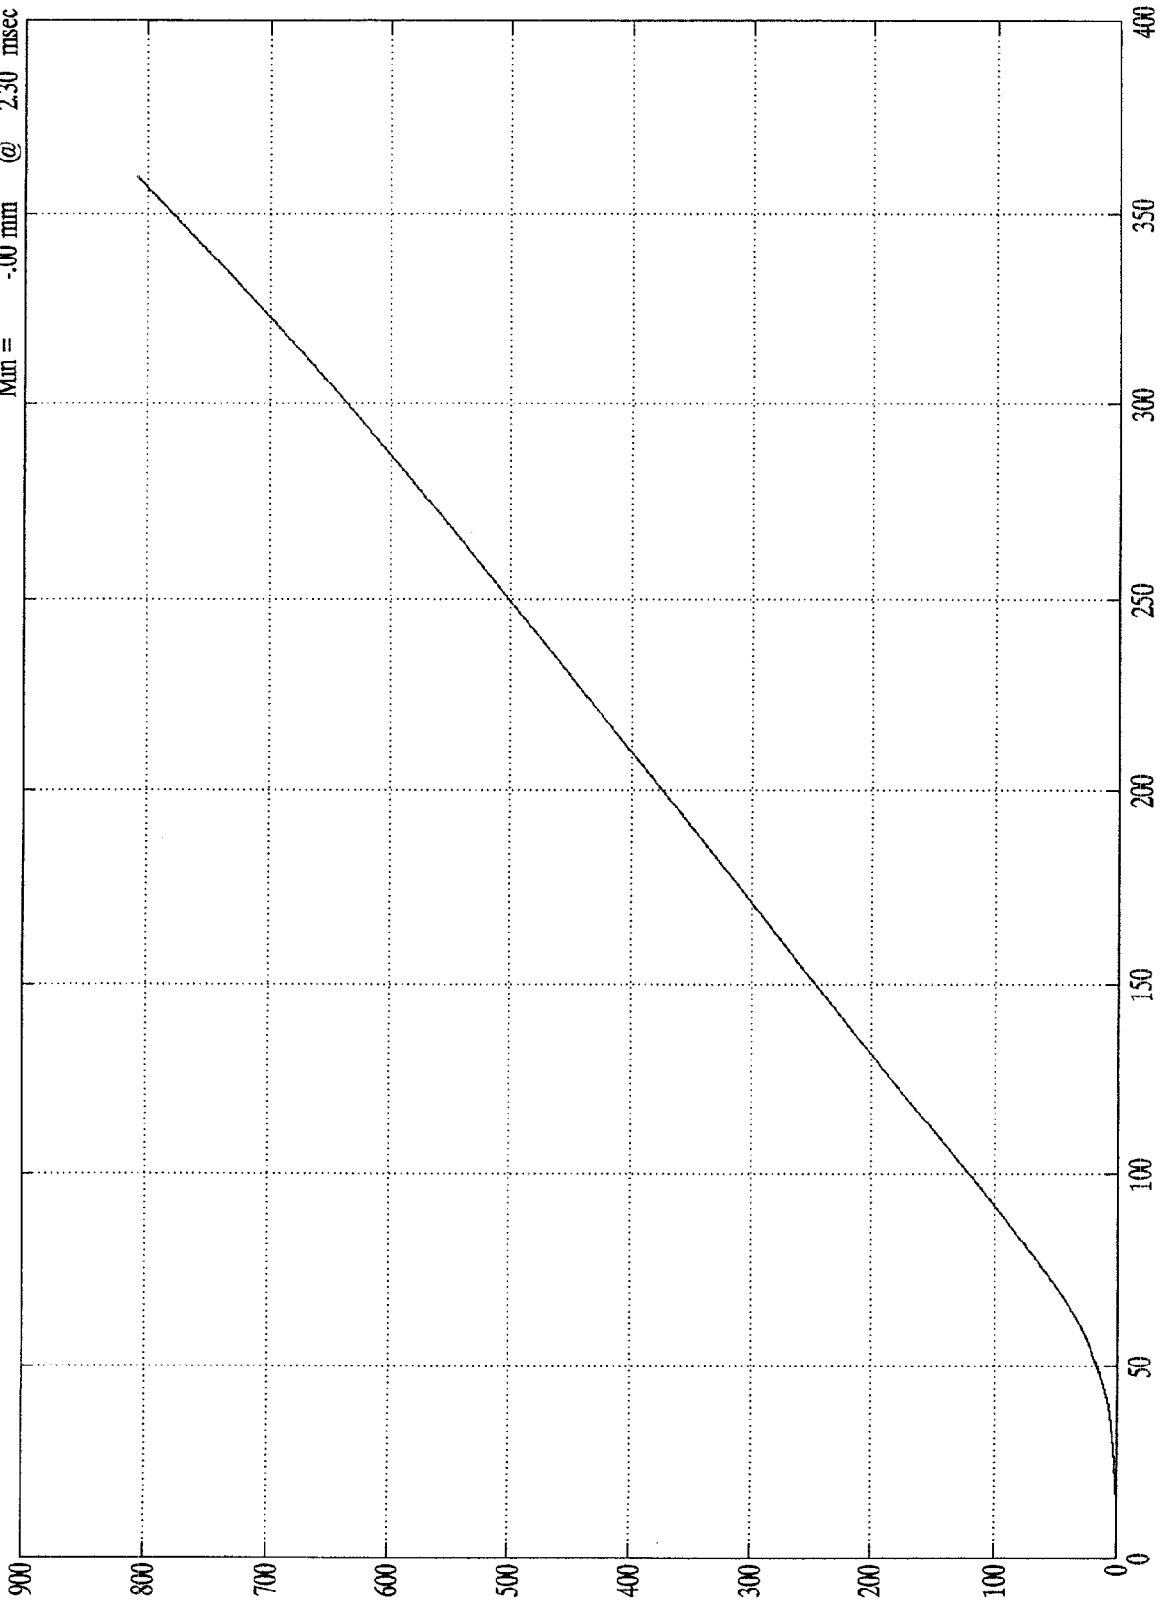

Time (msec)


SAE Filter Class 60

III

VTV TEST Ford Escort/Olds Cutlass


Cir 1 Squib Out

Max = 5182.16 Non @ 358.39 msec
Min = -1132.63 Non @ 116.89 msec

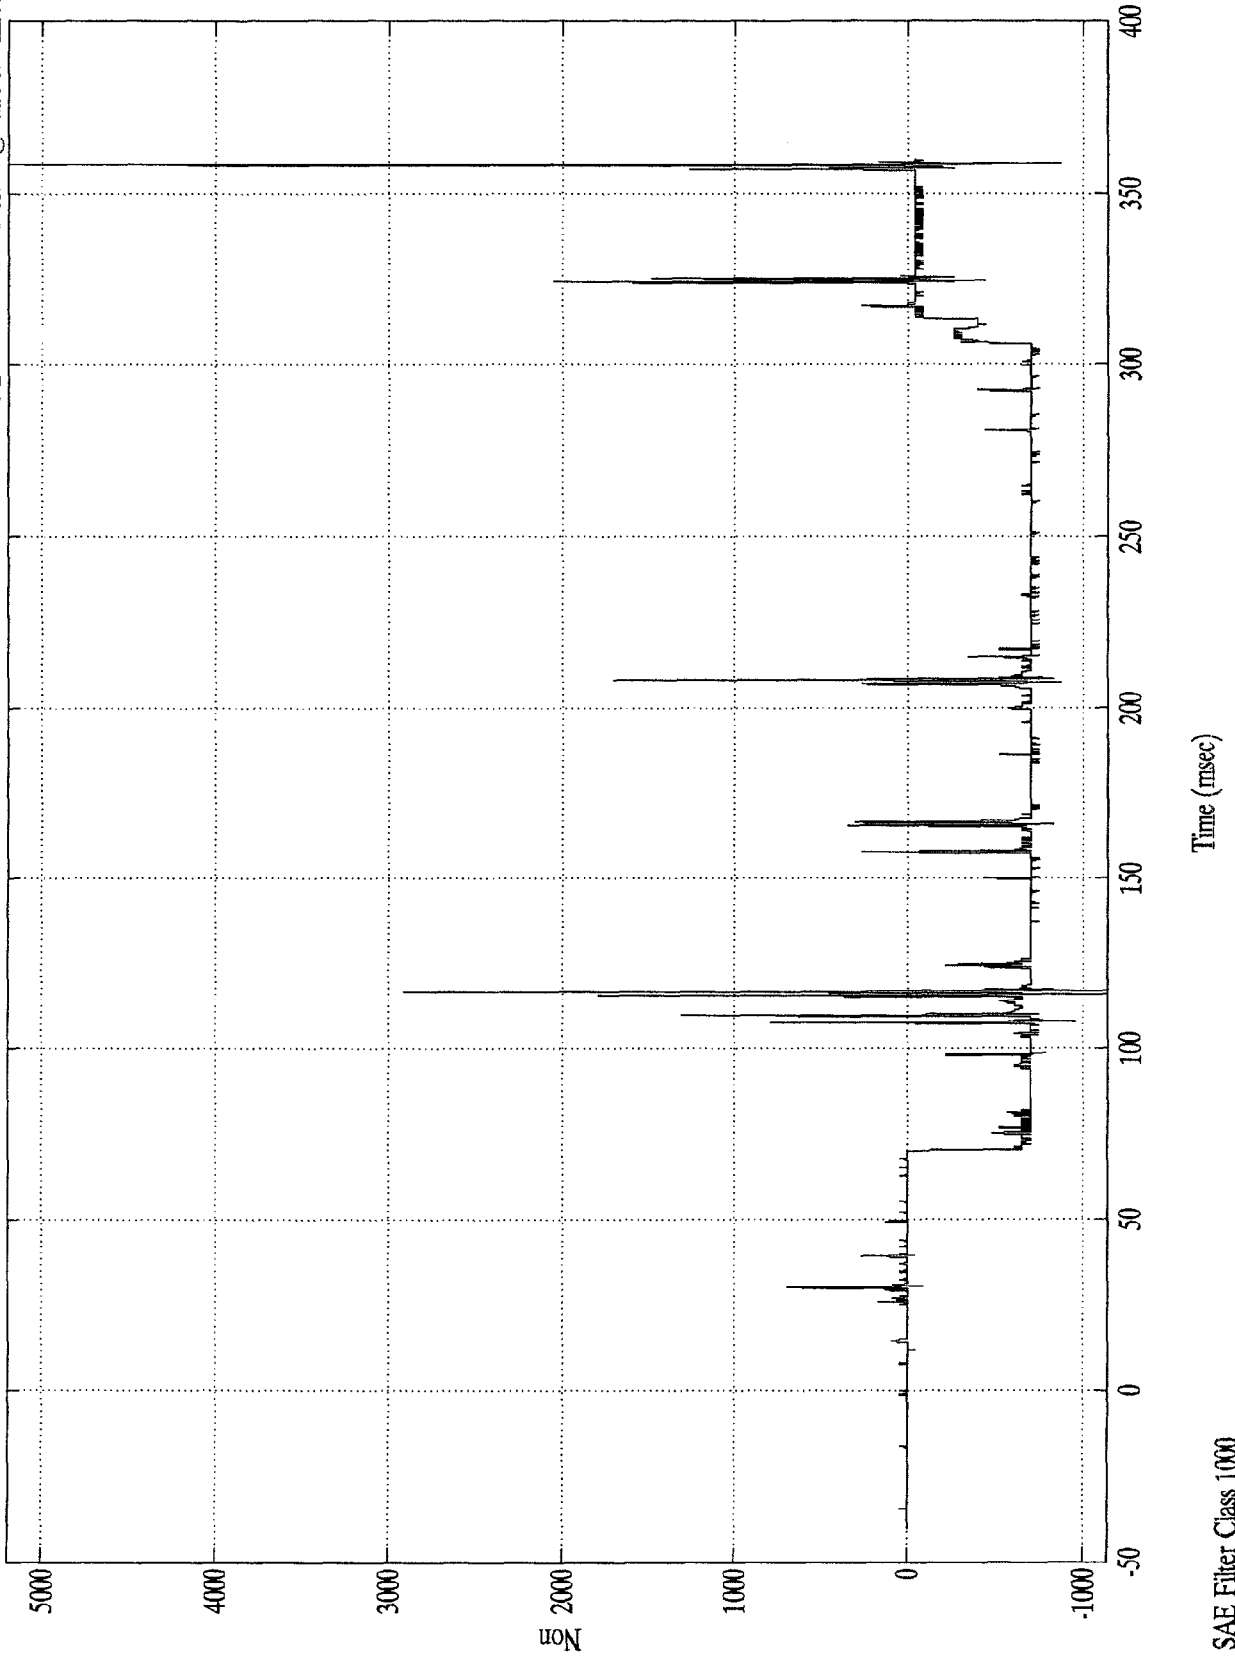

Max = 2867.89 Non @ 358.39 msec
Min = -493.86 Non @ 116.89 msec


Cir 2 Squib Out

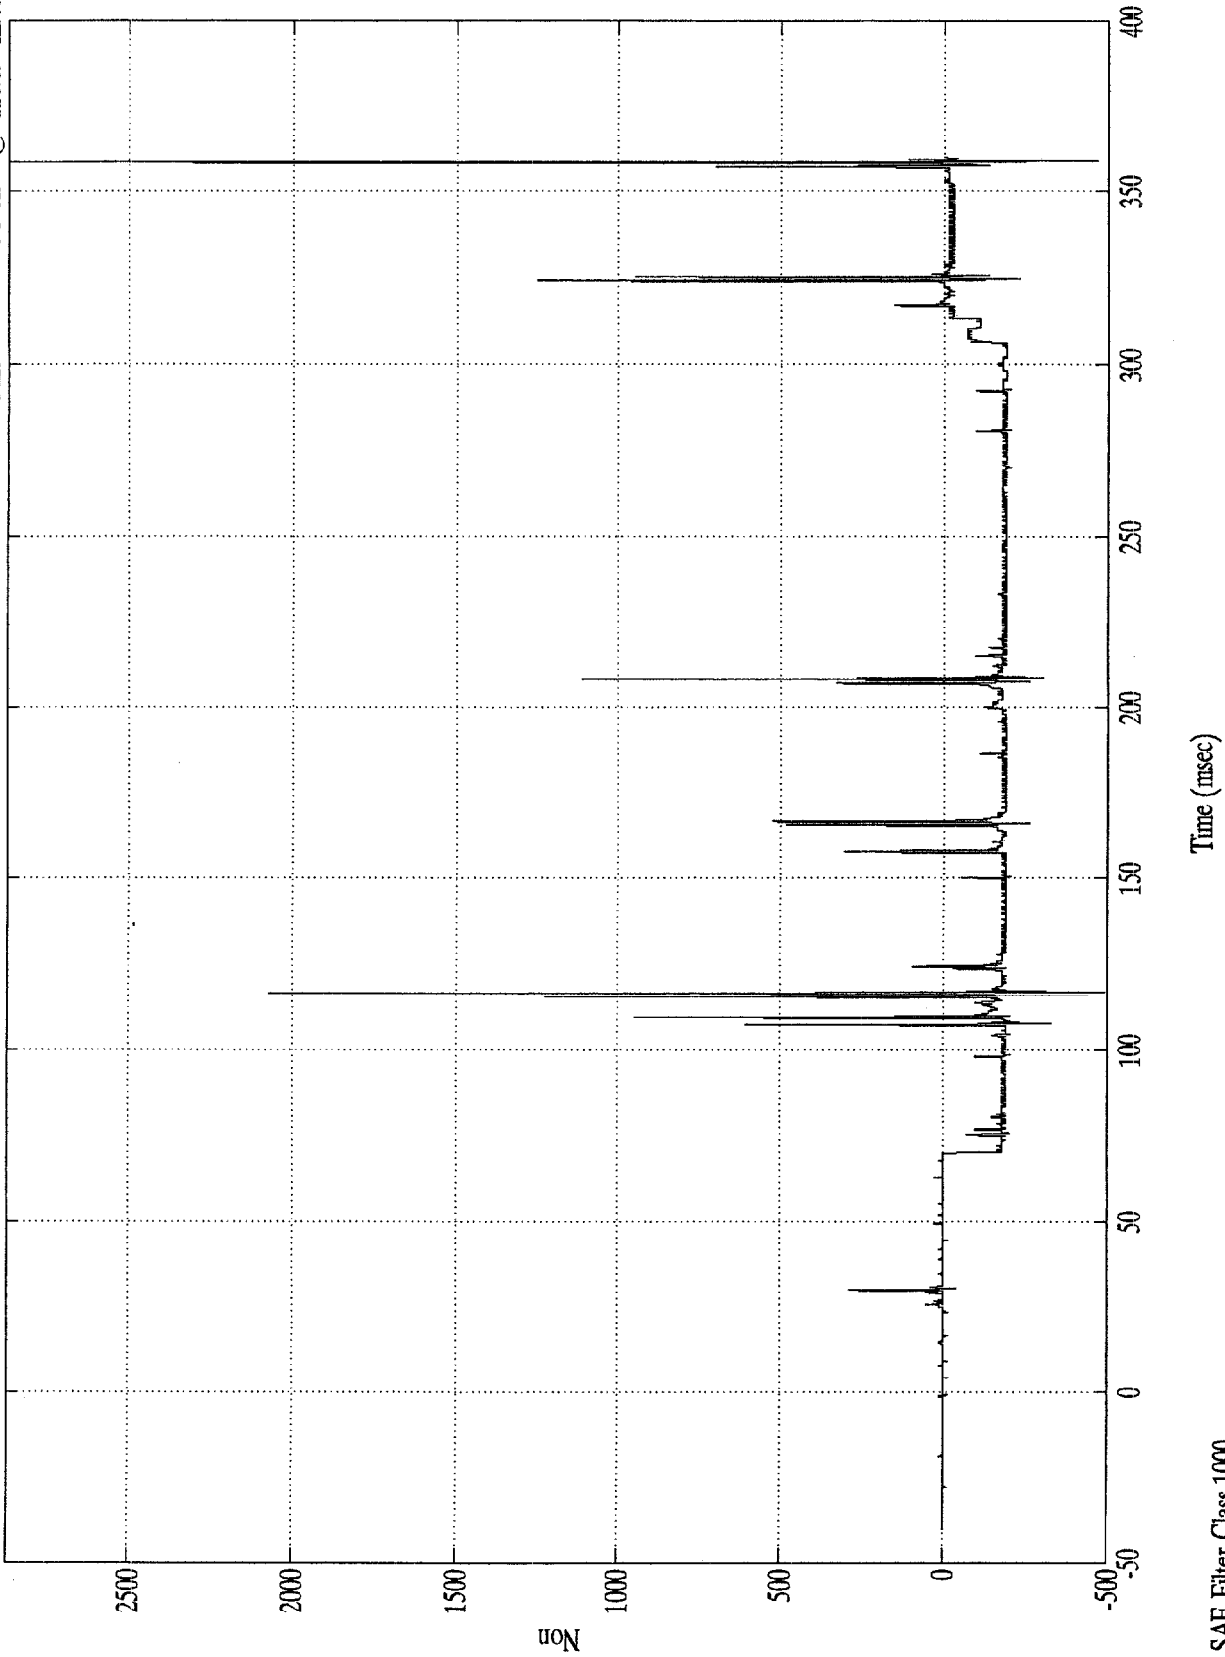

VTV TEST Ford Escort/Olds Cutlass

V2 Left X


Max = 2.67 Gs @ 45.59 msec
Min = -5.41 Gs @ 67.00 msec

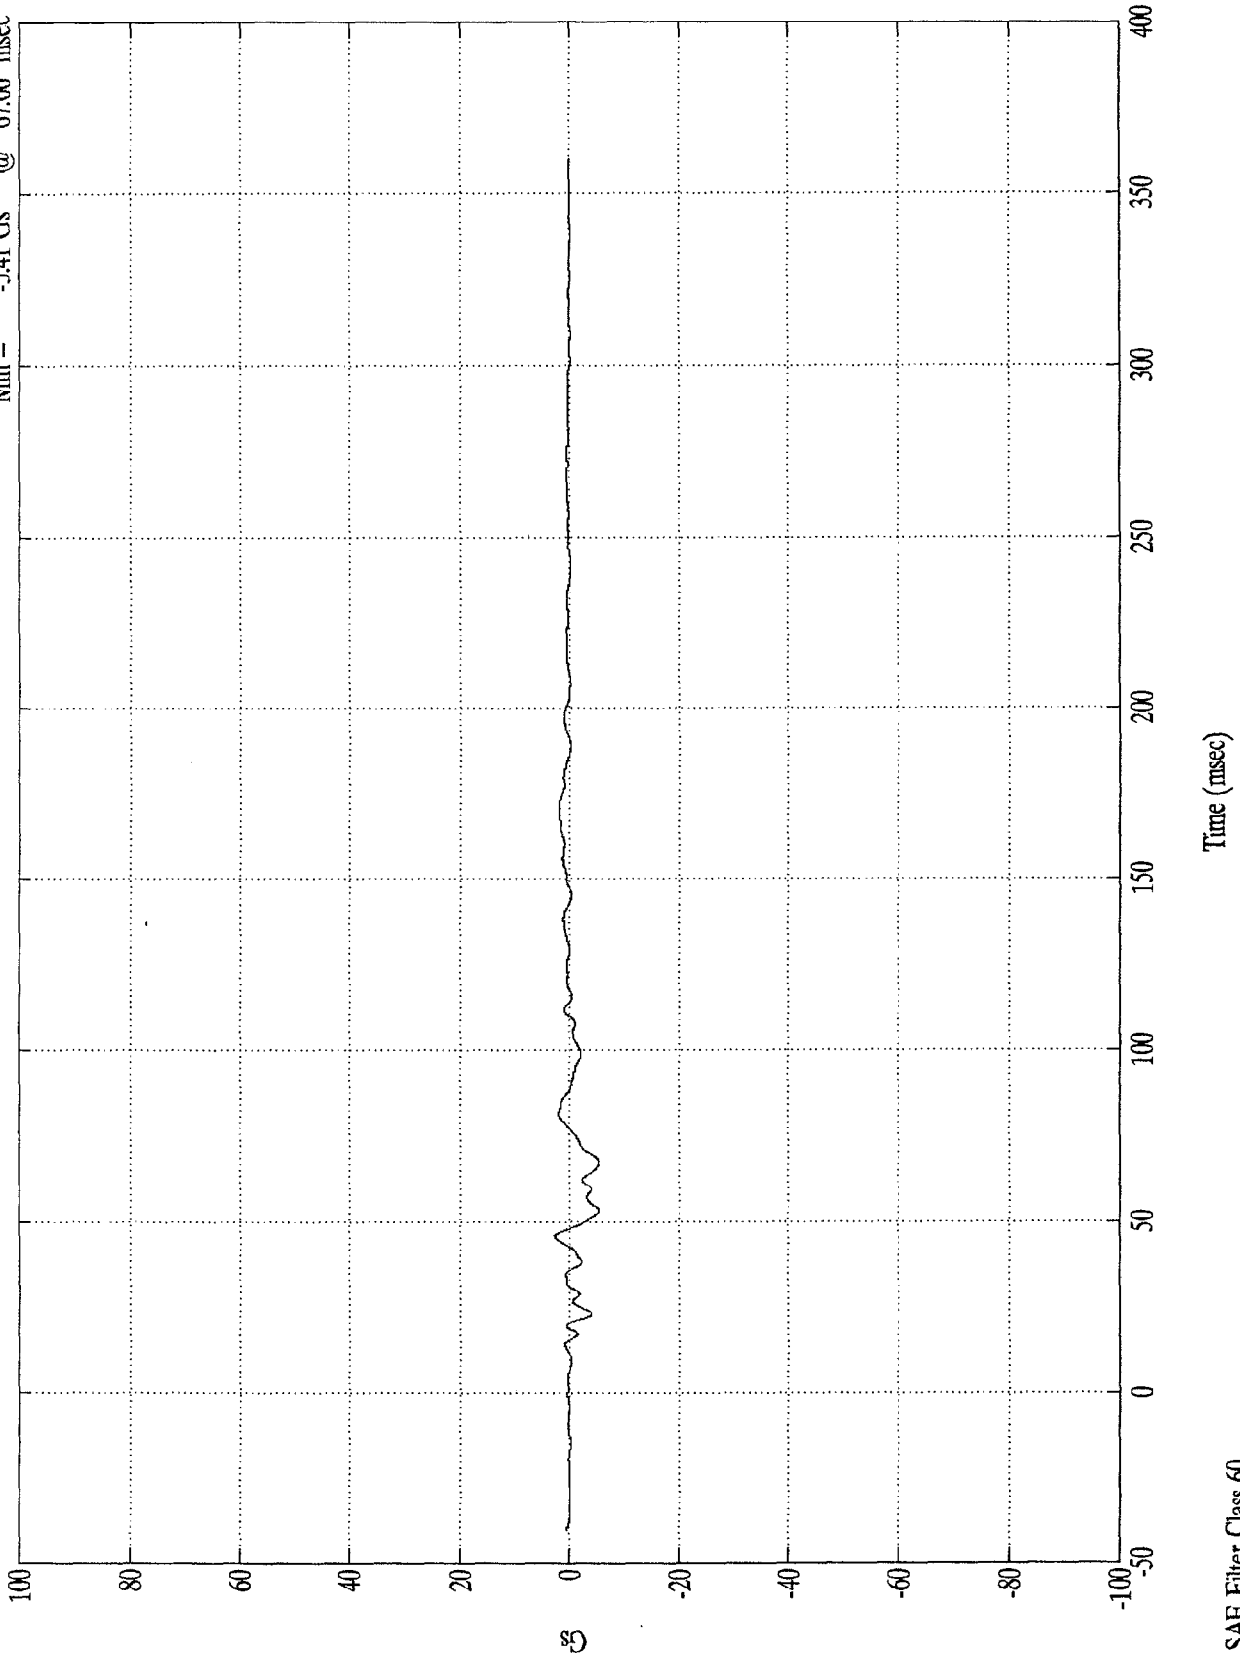

VTV TEST Ford Escort/Olds Cutlass

1st Integral V2 Left X


Max = 45.08 kph @ 15.80 msec
Min = 40.71 kph @ 109.80 msec

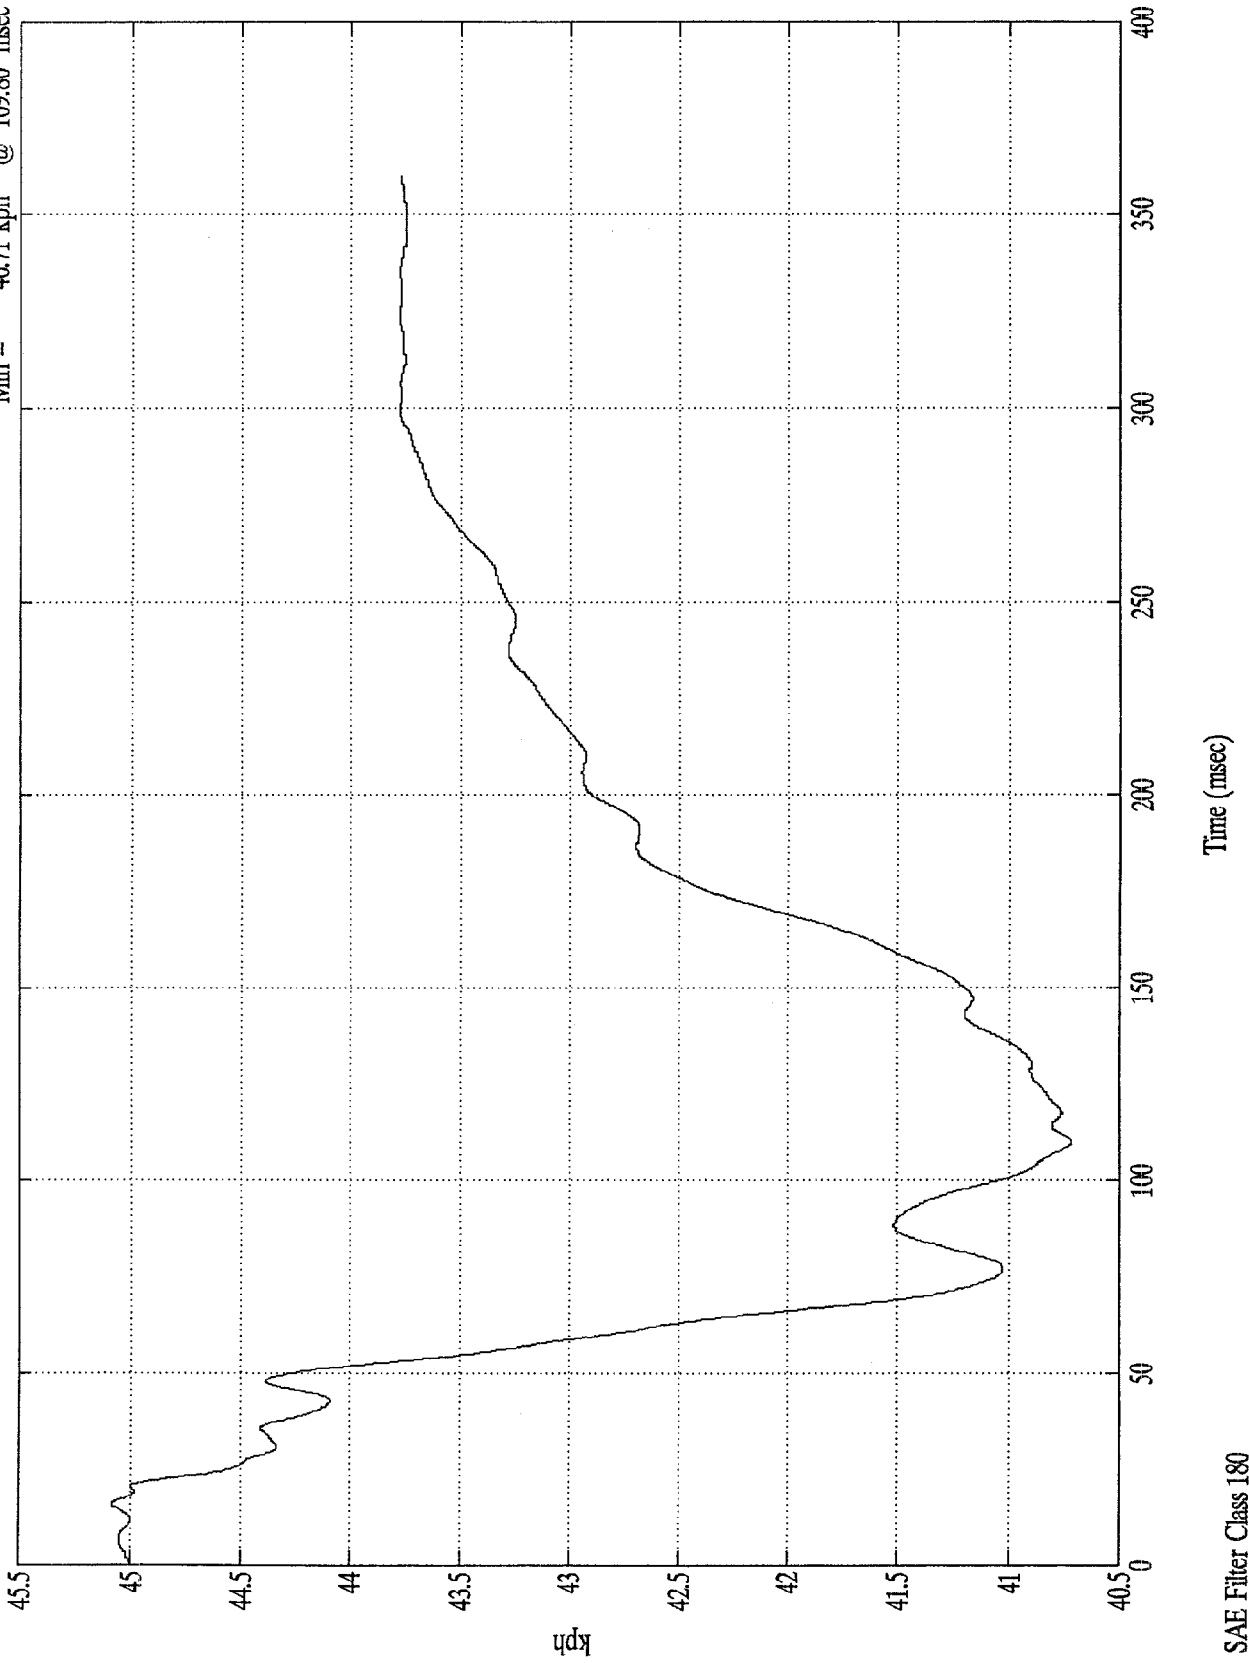

VTV TEST Ford Escort/Olds Cutlass

2nd Integral V2 Left X

Max = 4288.54 mm @ 359.89 msec
Min = .00 mm @ 0.00 msec

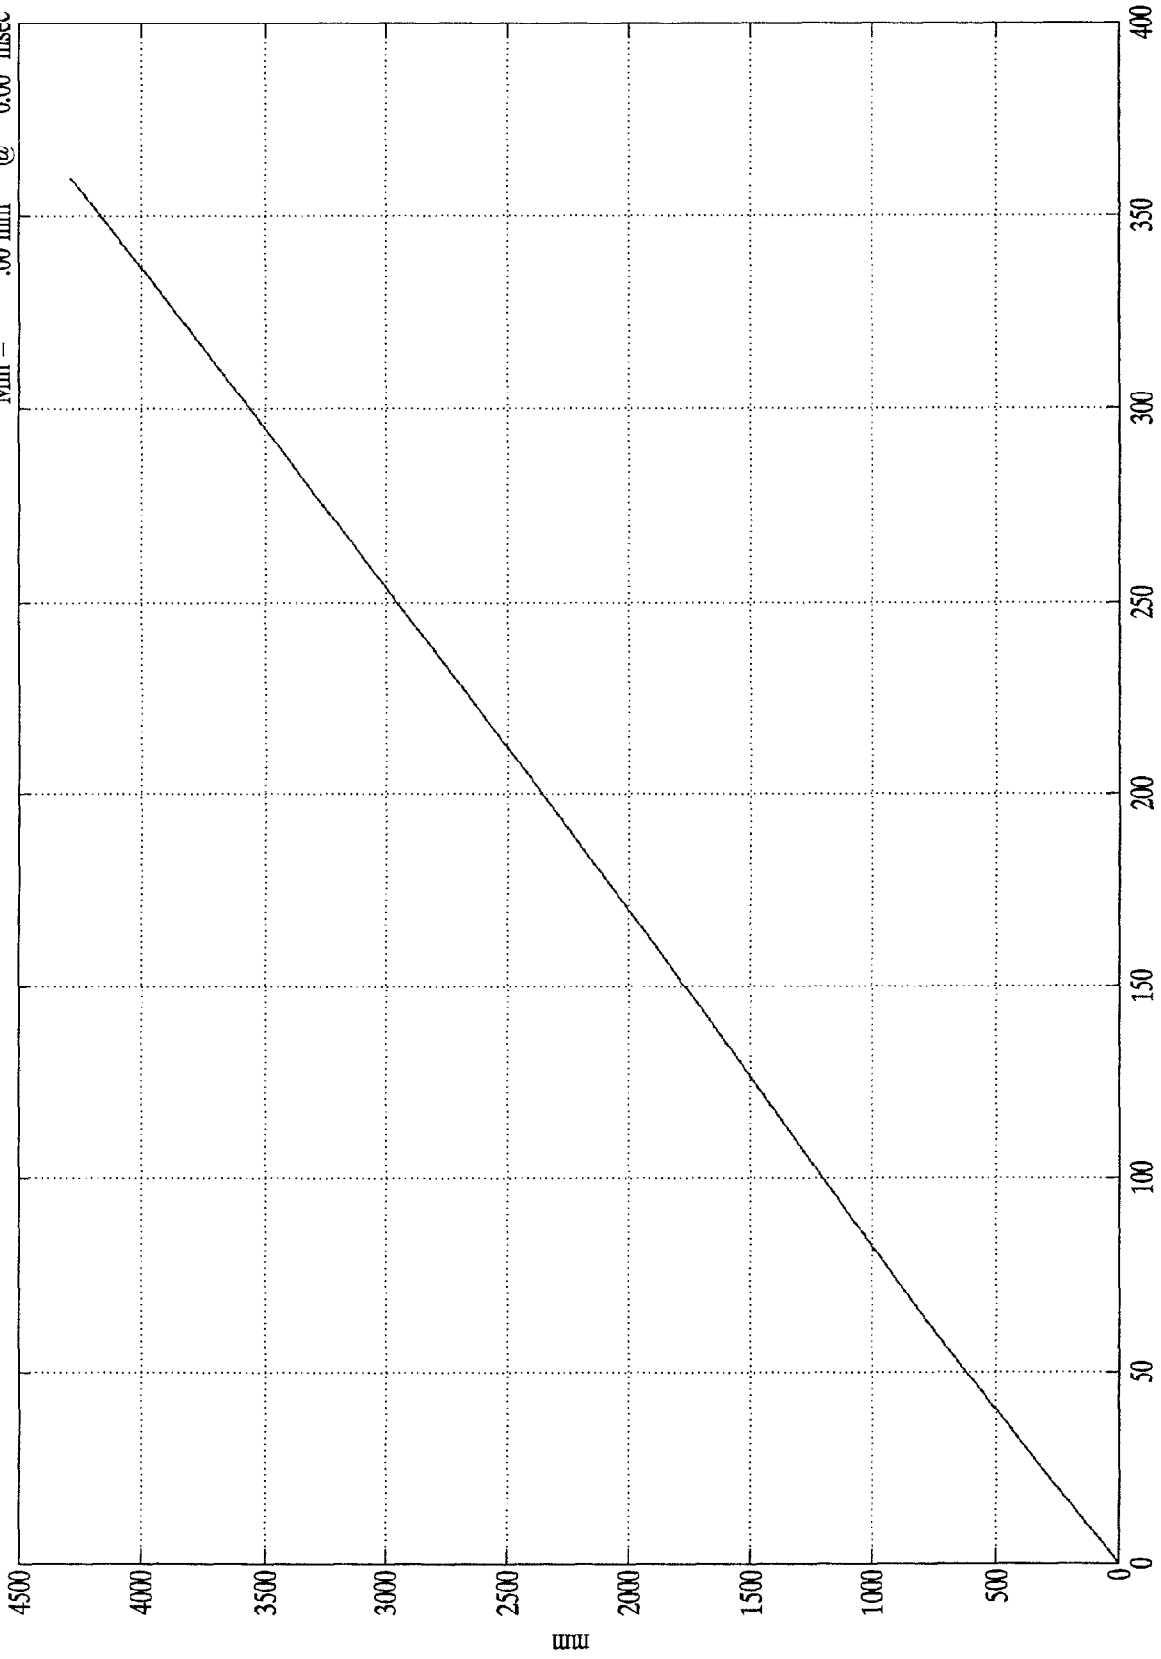


Time (msec)

SAE Filter Class 180

VTV TEST Ford Escort/Olds Cutlass

Max = 1.84 Gs @ 105.19 msec
Min = -7.29 Gs @ 49.39 msec

V2 Left Y

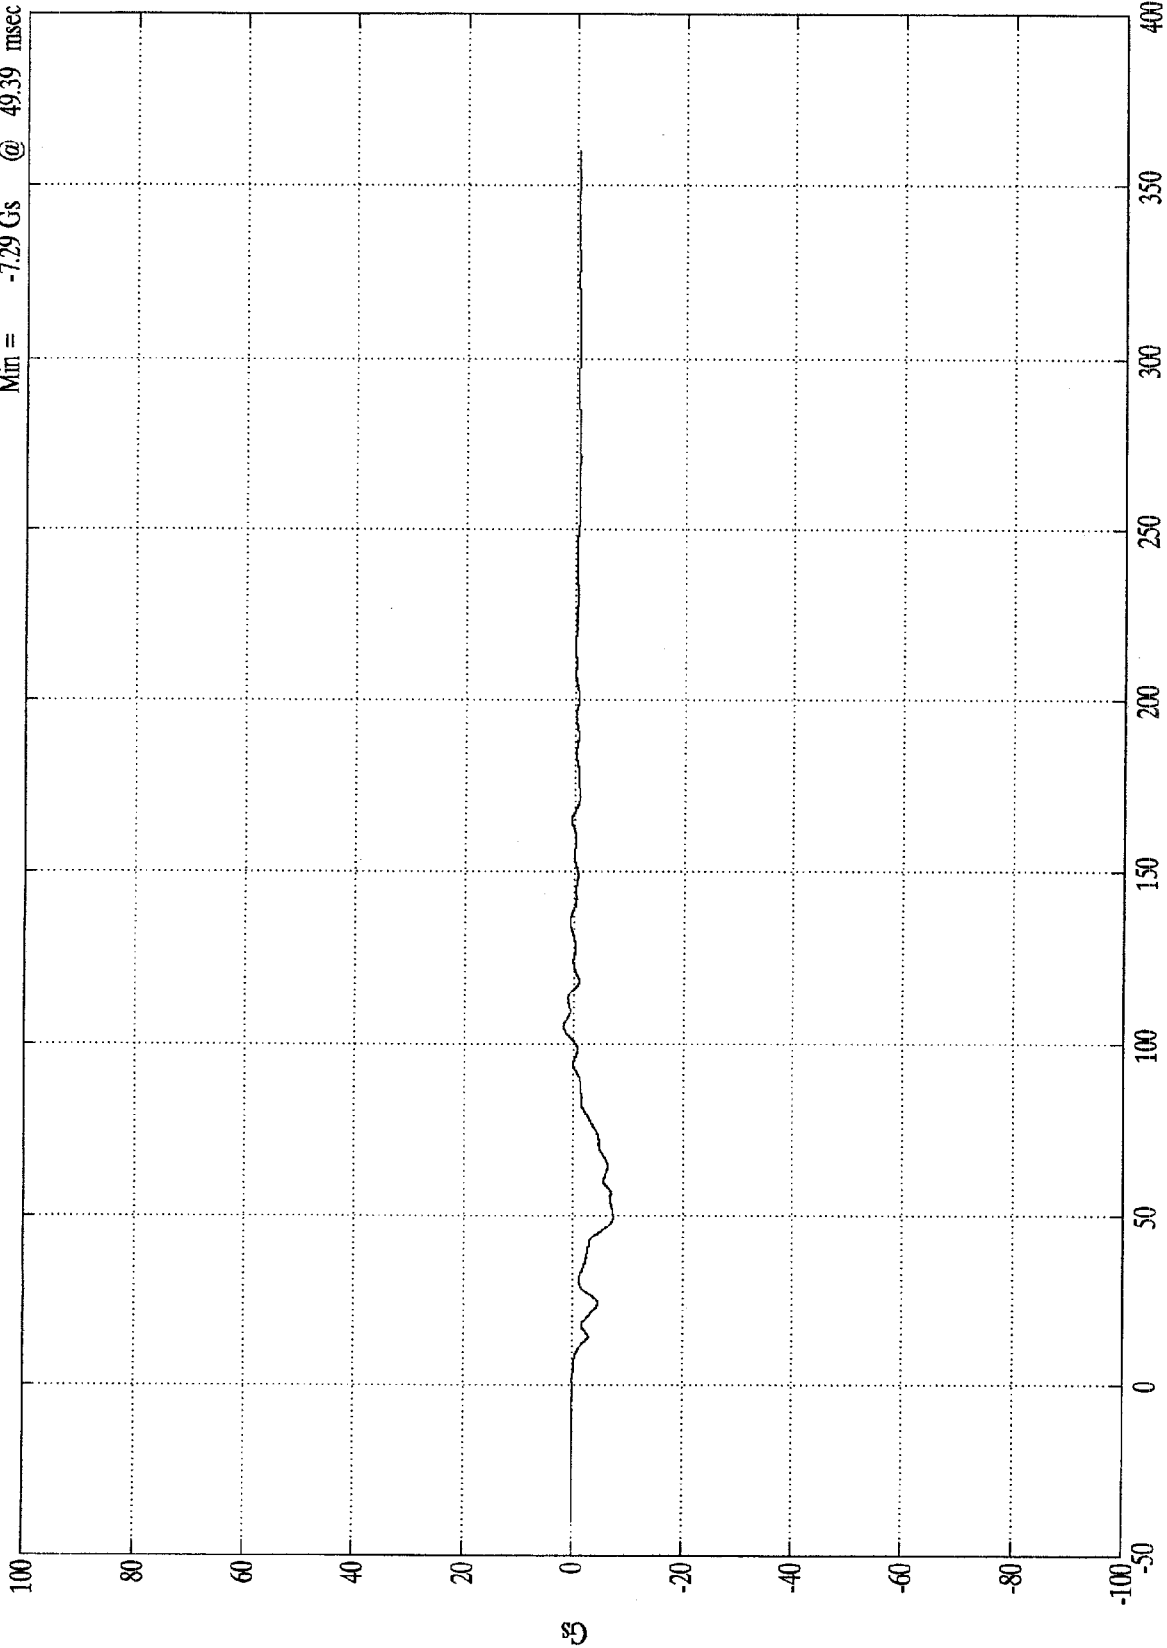


Time (msec)

SAE Filter Class 60

VTV TEST Ford Escort/Olds Cutlass

Max = .01 kph @ 3.30 msec
Min = -13.19 kph @ 359.89 msec


1st Integral V2 Left Y

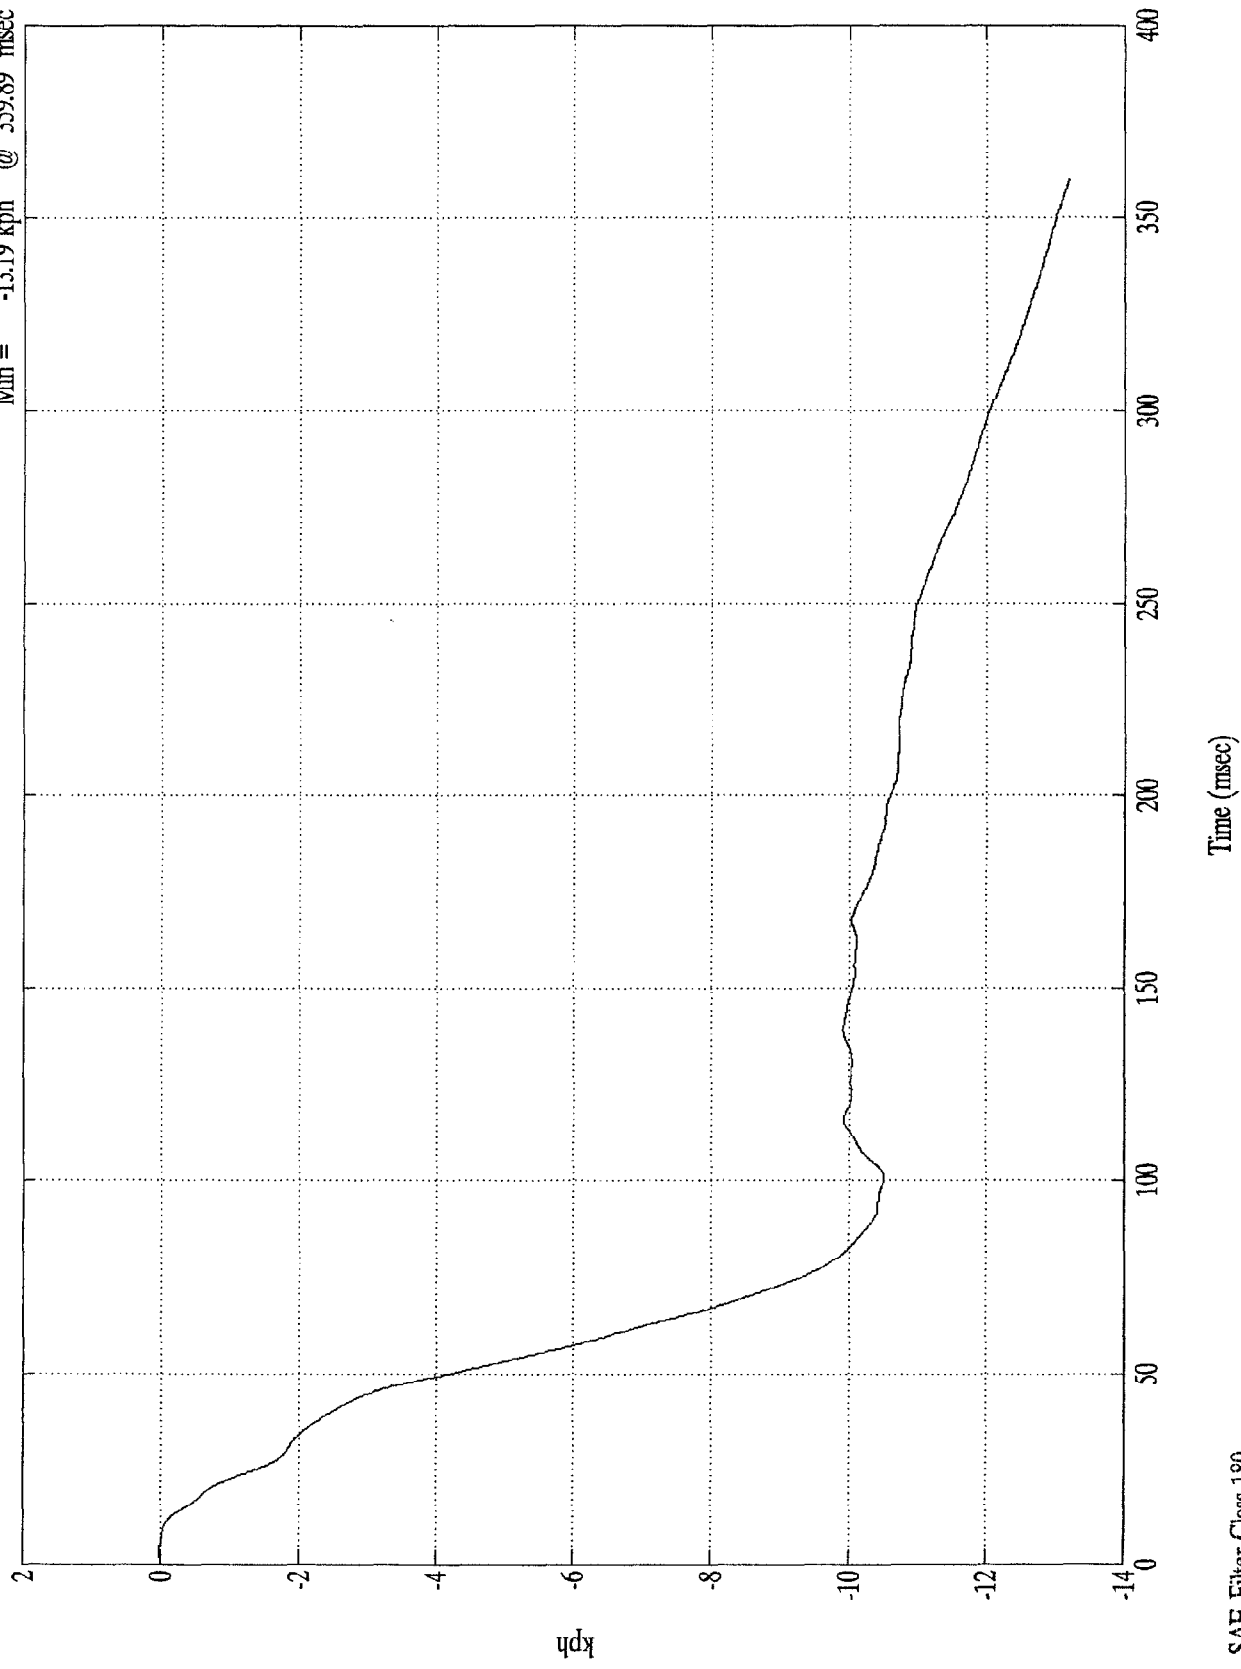

VTV TEST Ford Escort/Olds Cutlass

2nd Integral V2 Left Y

Max = .01 mm @ 5.70 msec
Min = -.94122 mm @ 359.89 msec

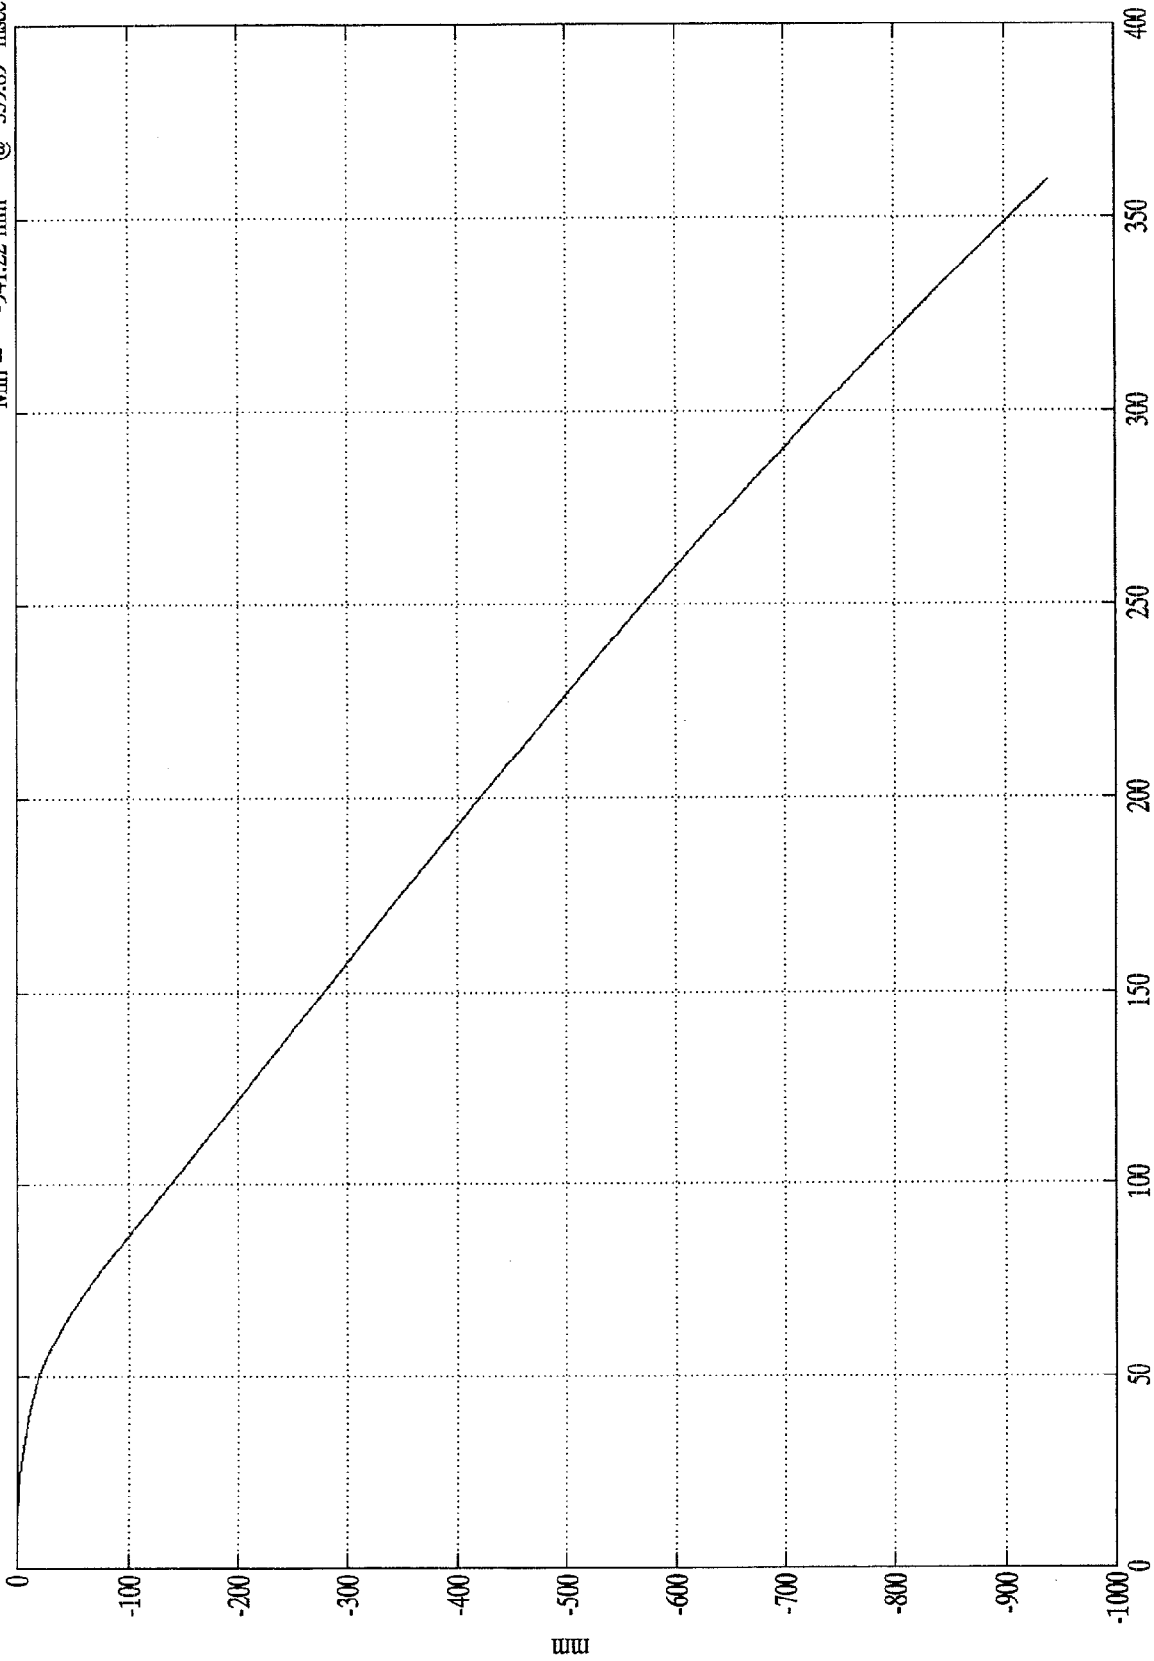


Time (msec)


SAE Filter Class 180

2nd Integral V2 Center X

Max = 3974.36 mm @ 359.89 msec
Min = .00 mm @ 0.00 msec

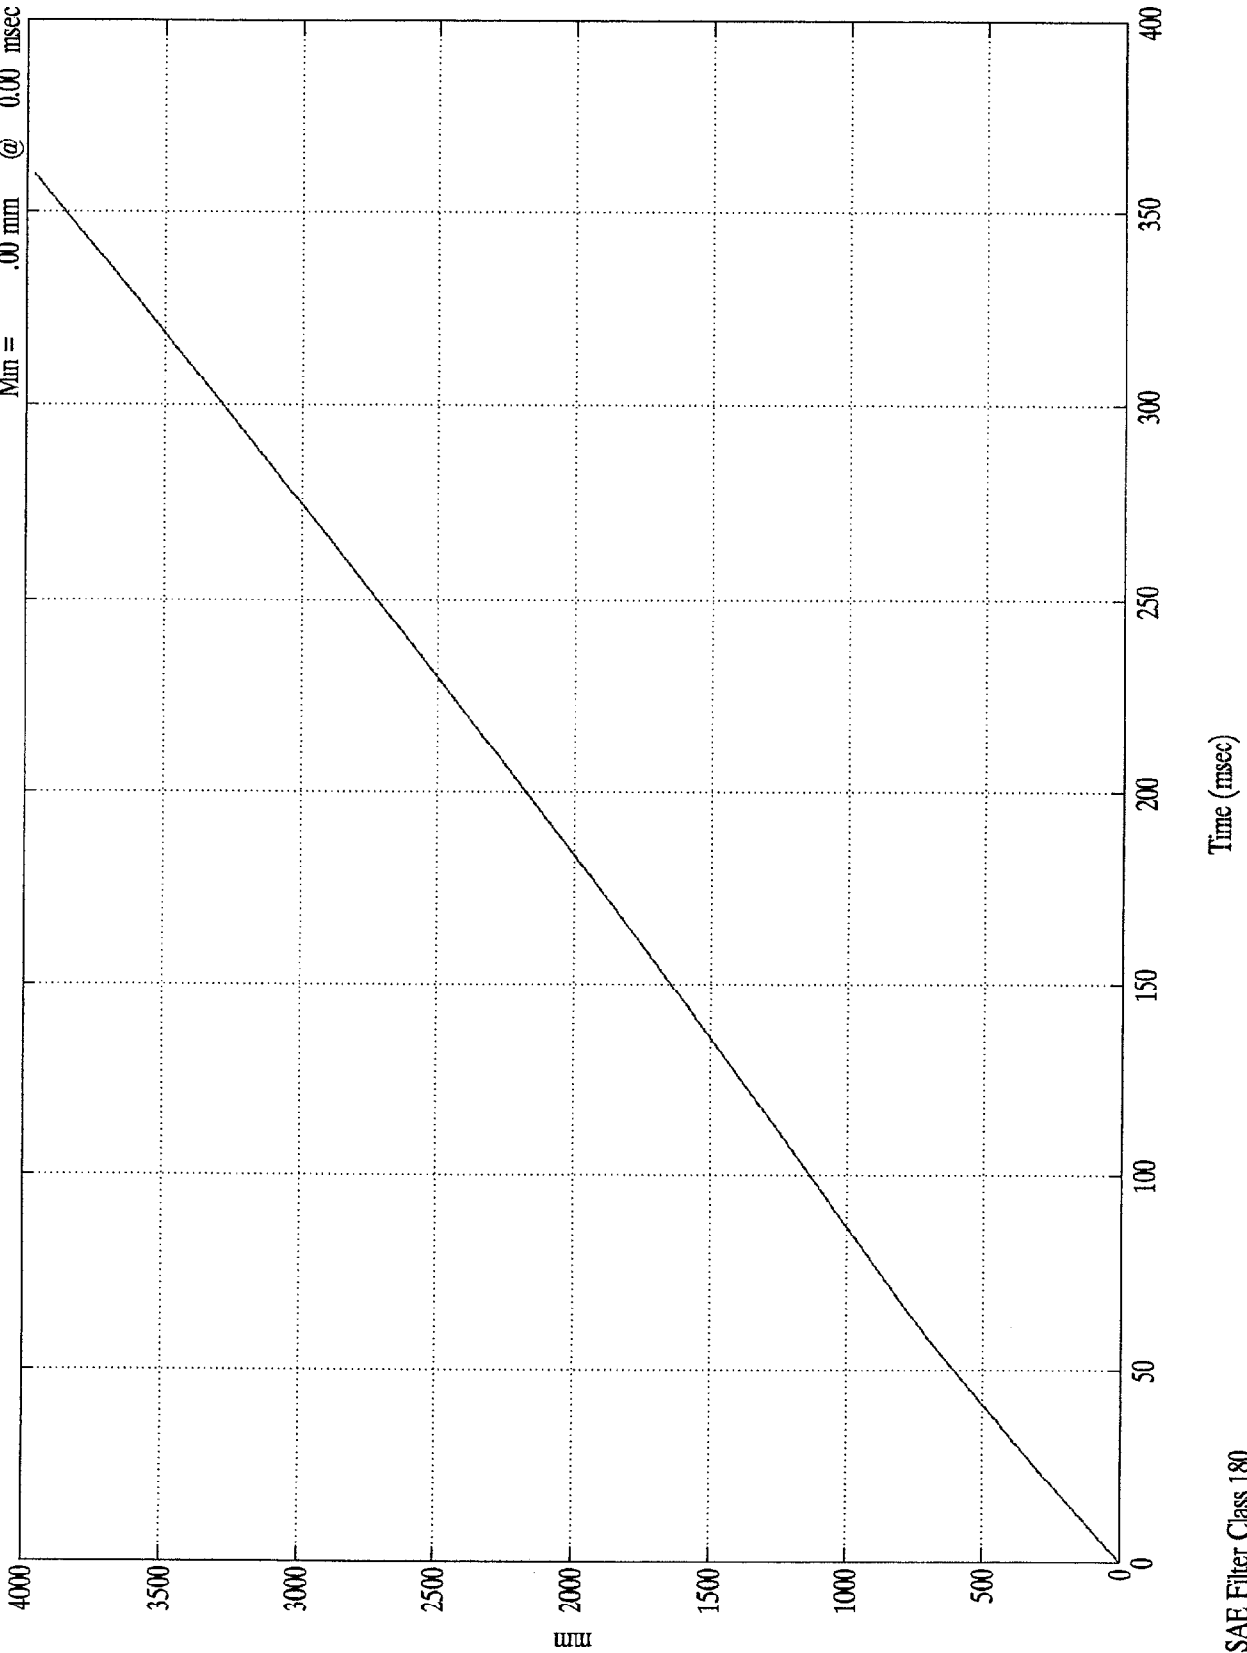


VTV TEST Ford Escort/Olds Cutlass

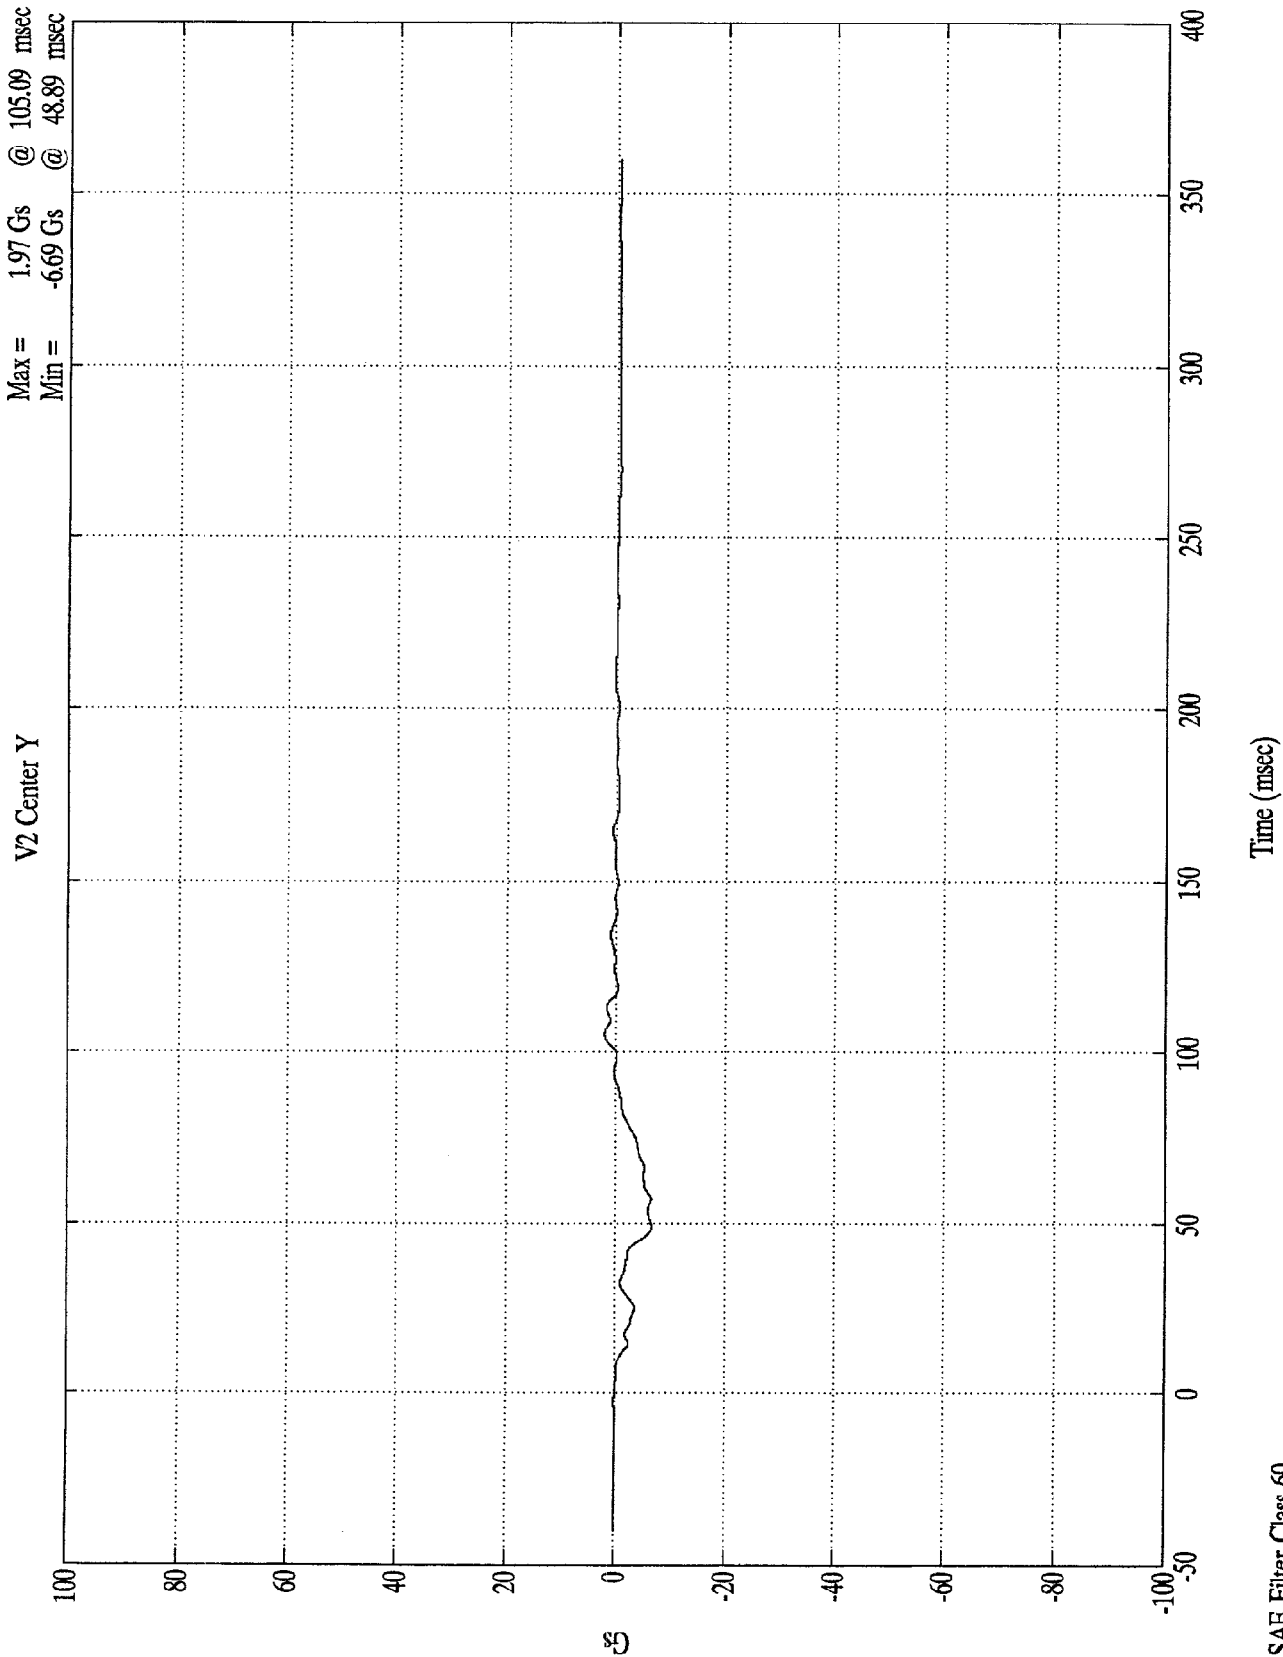

VTV TEST Ford Escort/Olds Cutlass

Max = .00 kph @ 2.50 msec
Min = -9.98 kph @ 359.89 msec

1st Integral V2 Center Y

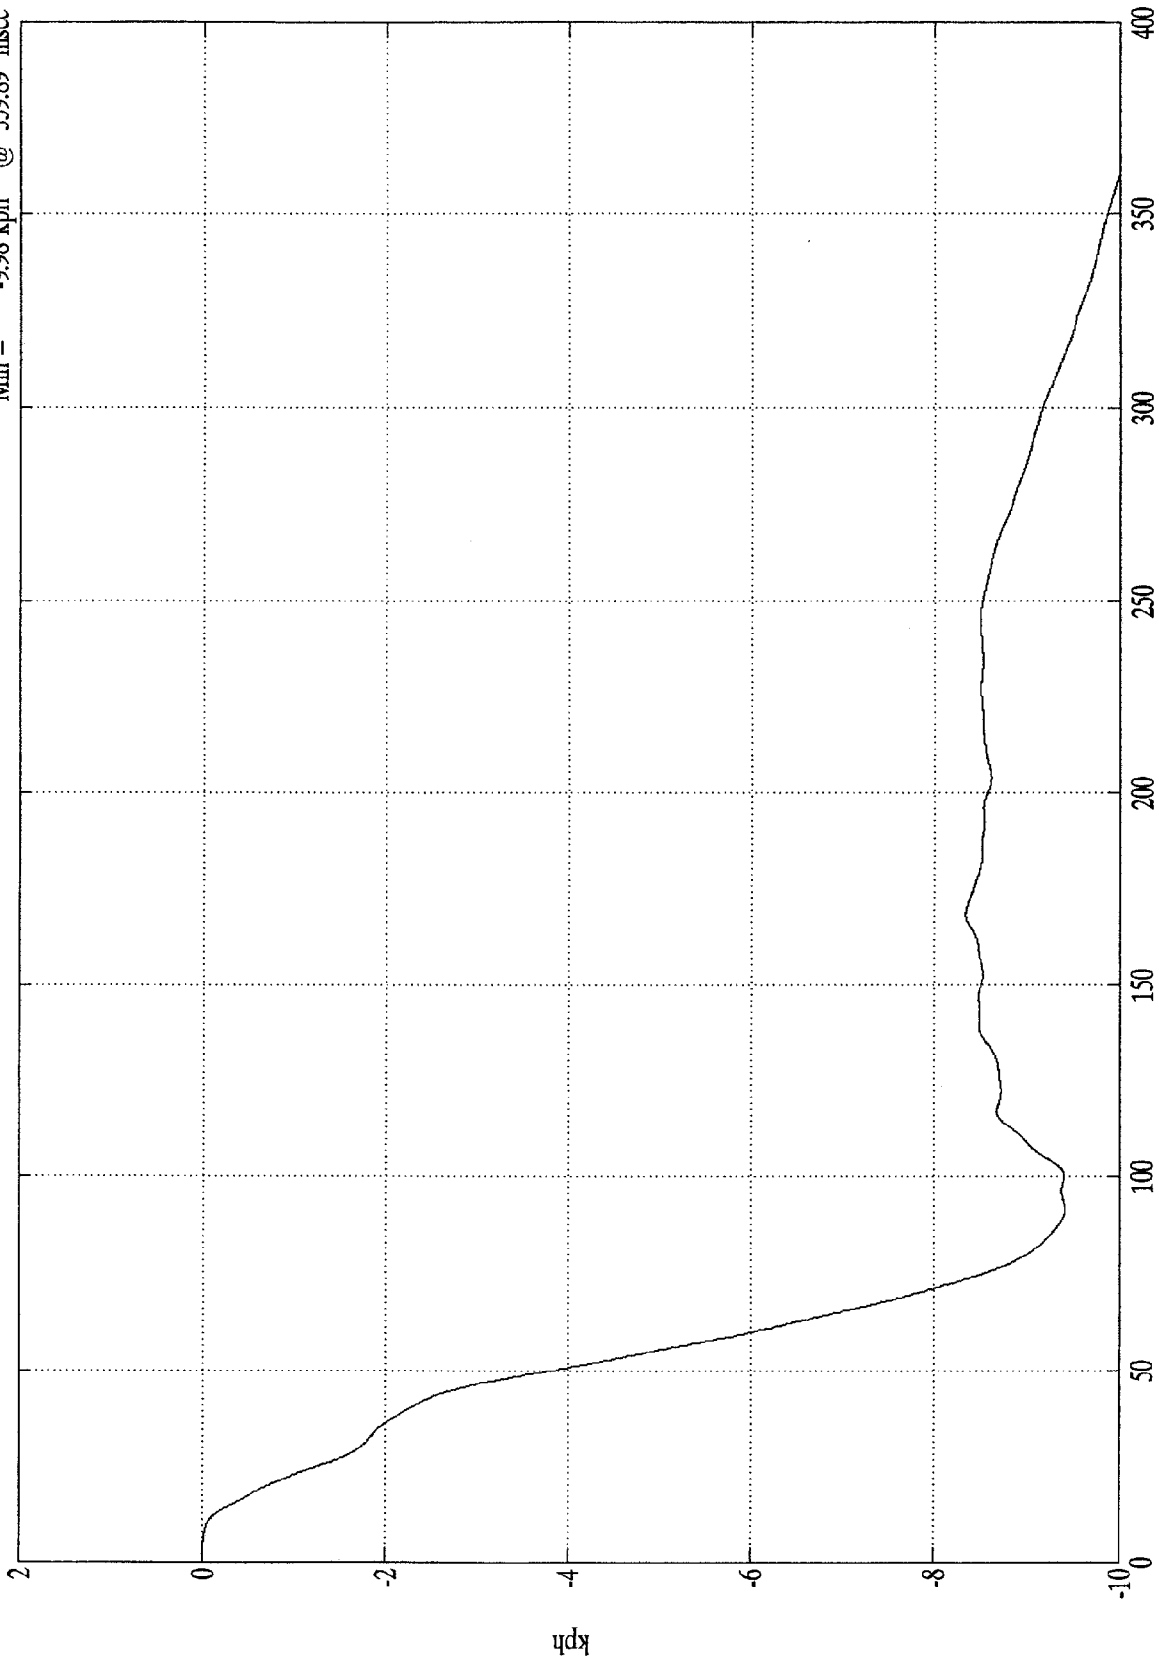


Time (msec)

SAE Filter Class 180


VTV TEST Ford Escort/Olds Cutlass

2nd Integral V2 Center Y

Max = .00 mm @ 4.40 msec
Min = -766.01 mm @ 359.89 msec

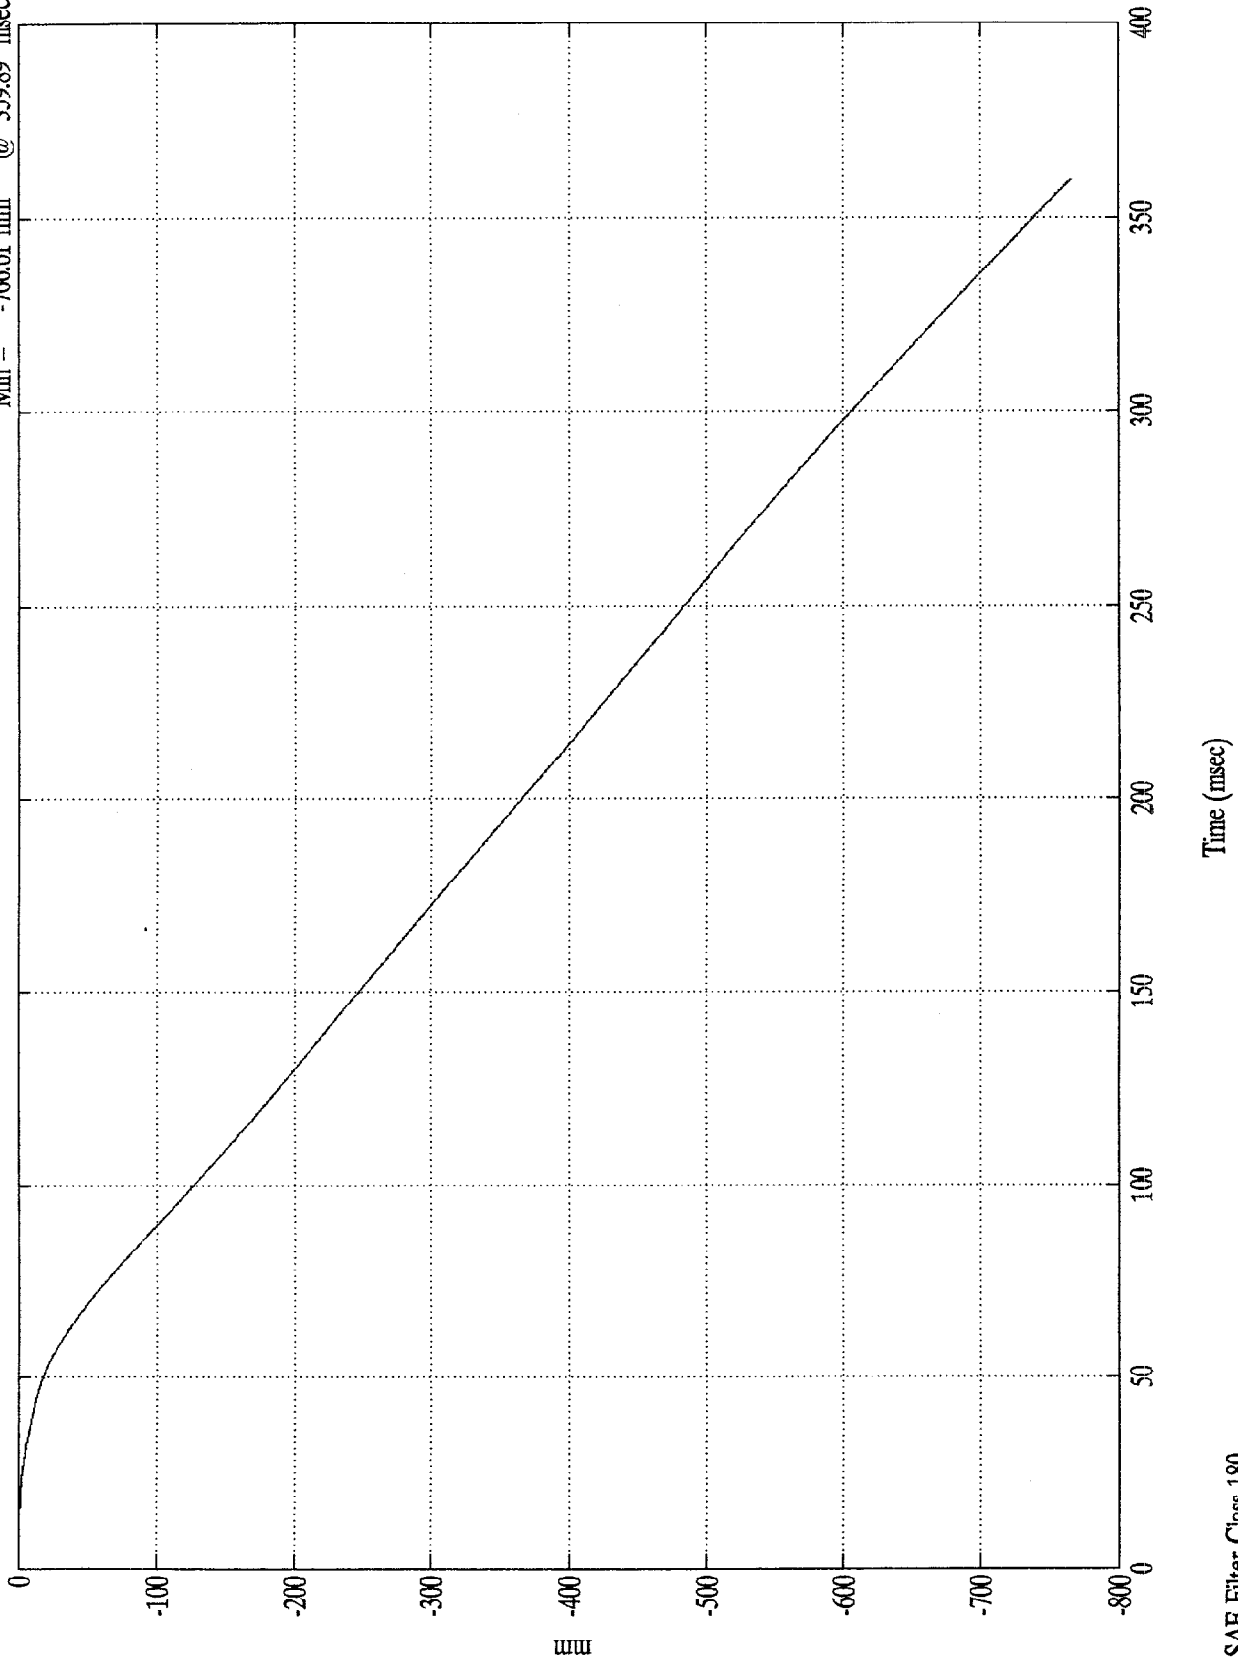

VTV TEST Ford Escort/Olds Cutlass

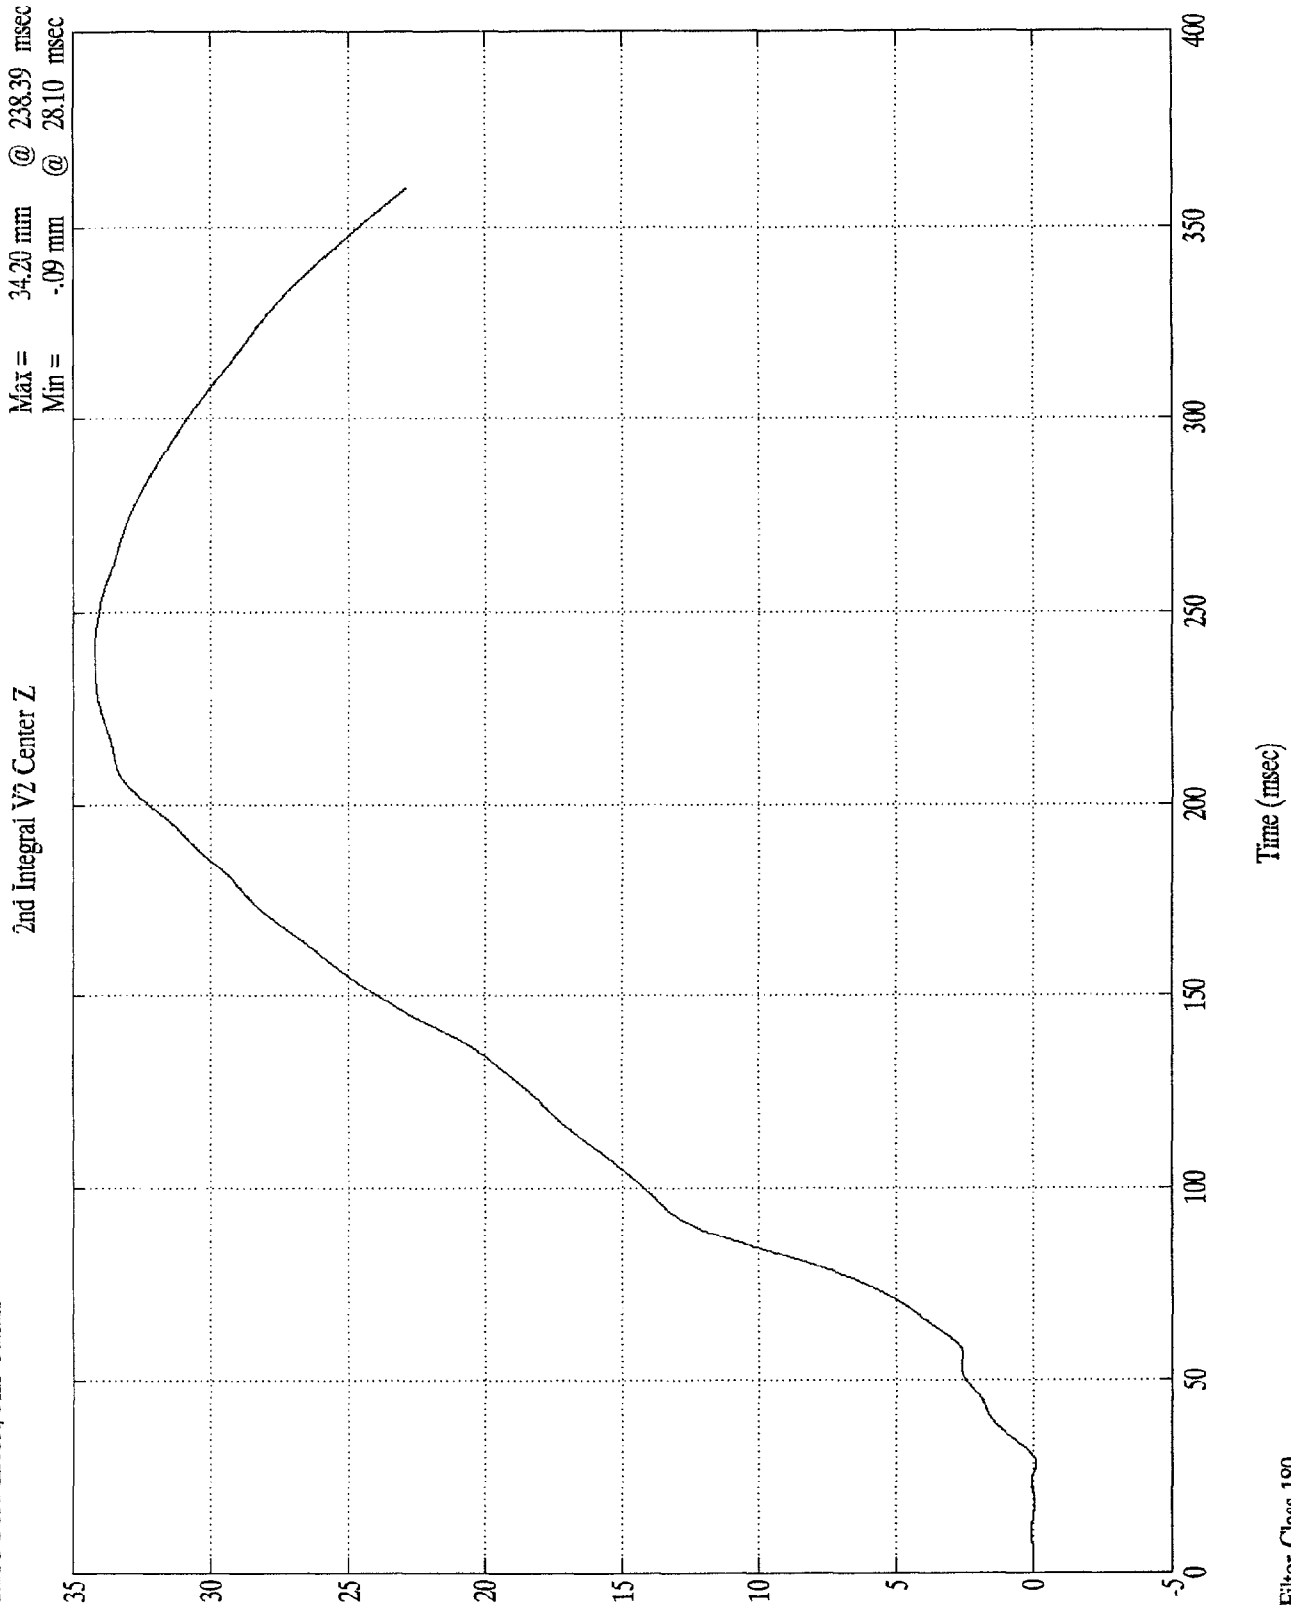

mm

D-44


8404-5

SAE Filter Class 180

VTV TEST Ford Escort/Olds Cutlass

Max = 1.77 Gs @ 196.79 msec
Min = -9.95 Gs @ 53.70 msec

V2 Right X

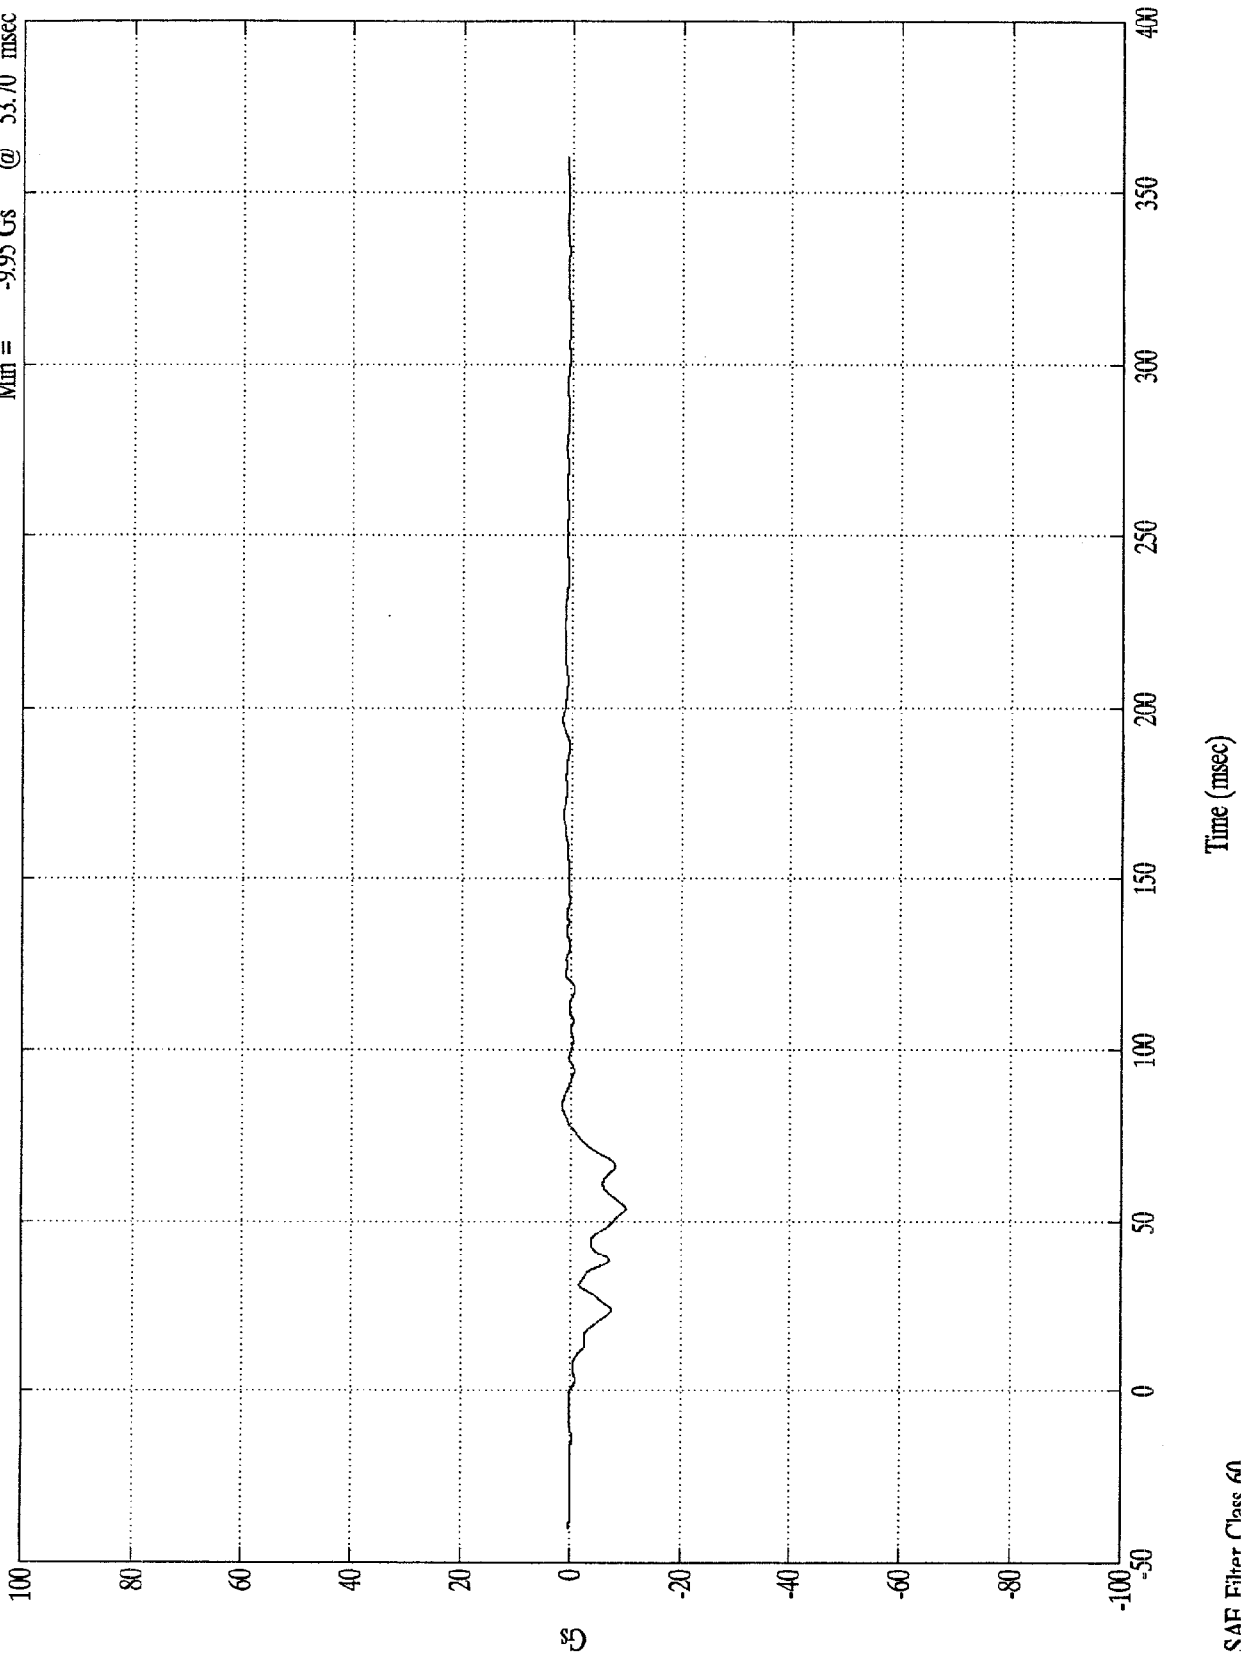

D-45


8404-5

SAE Filter Class 60

VTV TEST Ford Escort/Olds Cutlass

1st Integral V2 Right X


Max = 45.00 kph @ 1.00 msec
Min = 32.89 kph @ 77.29 msec

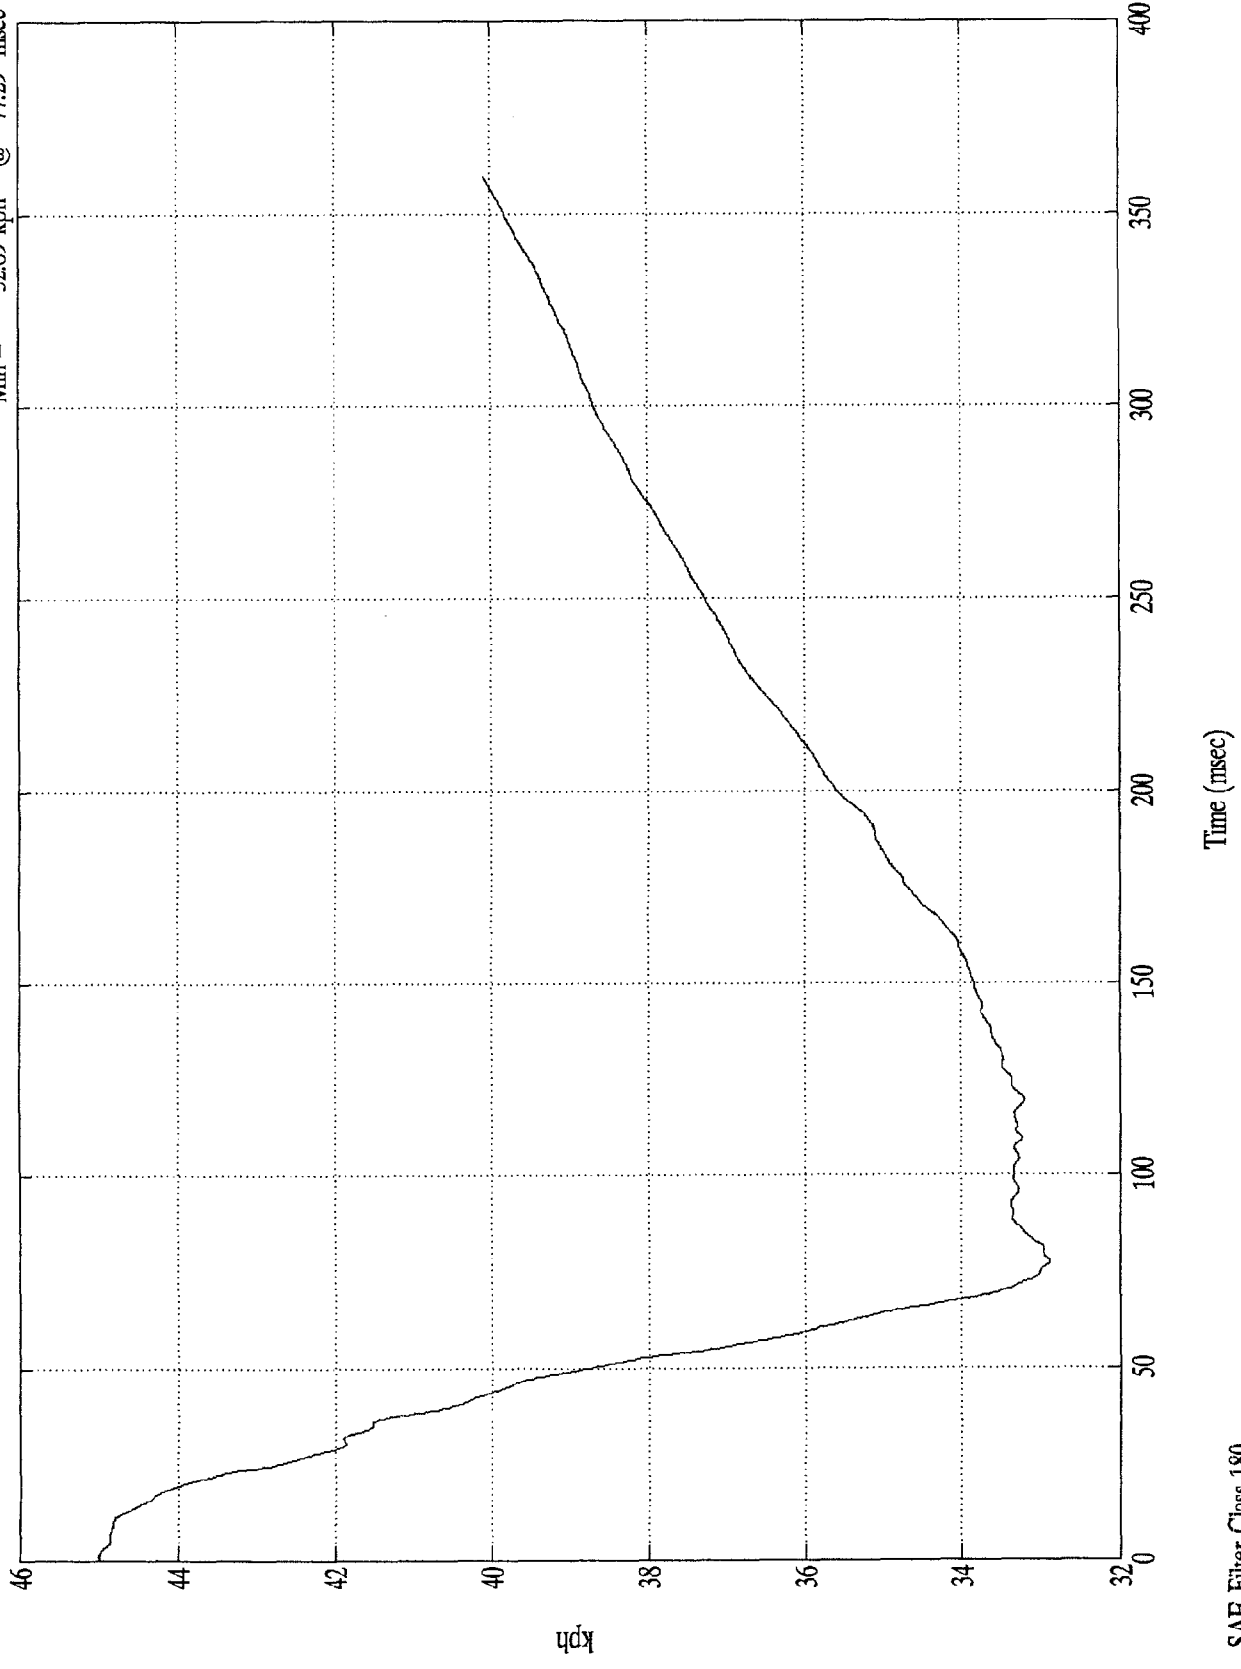

VTV TEST Ford Escort/Olds Cutlass

2nd Integral V2 Right X

Max = 3703.60 mm @ 359.89 msec
Min = .00 mm @ 0.00 msec

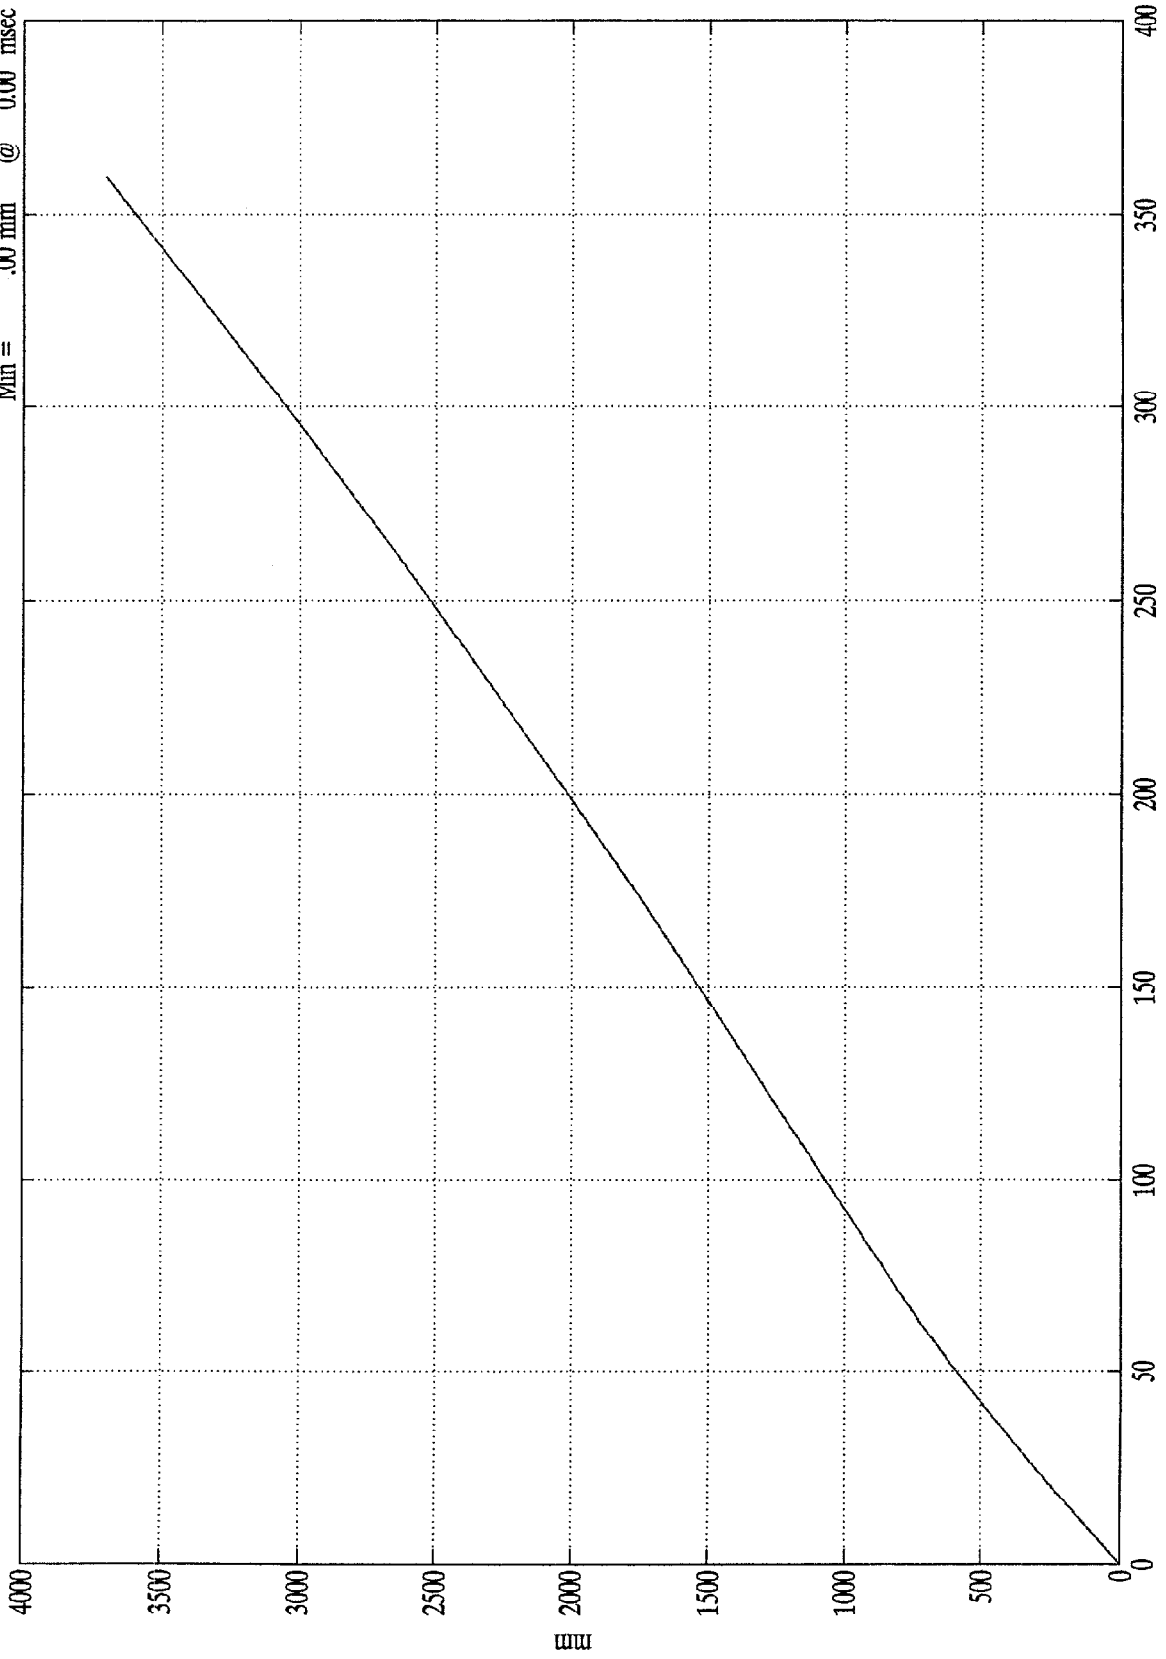


Time (msec)

SAE Filter Class 180

VTV TEST Ford Escort/Olds Cutlass

Vz Right Y

Max = 2.41 Gs @ 105.00 msec
Min = -7.00 Gs @ 57.09 msec

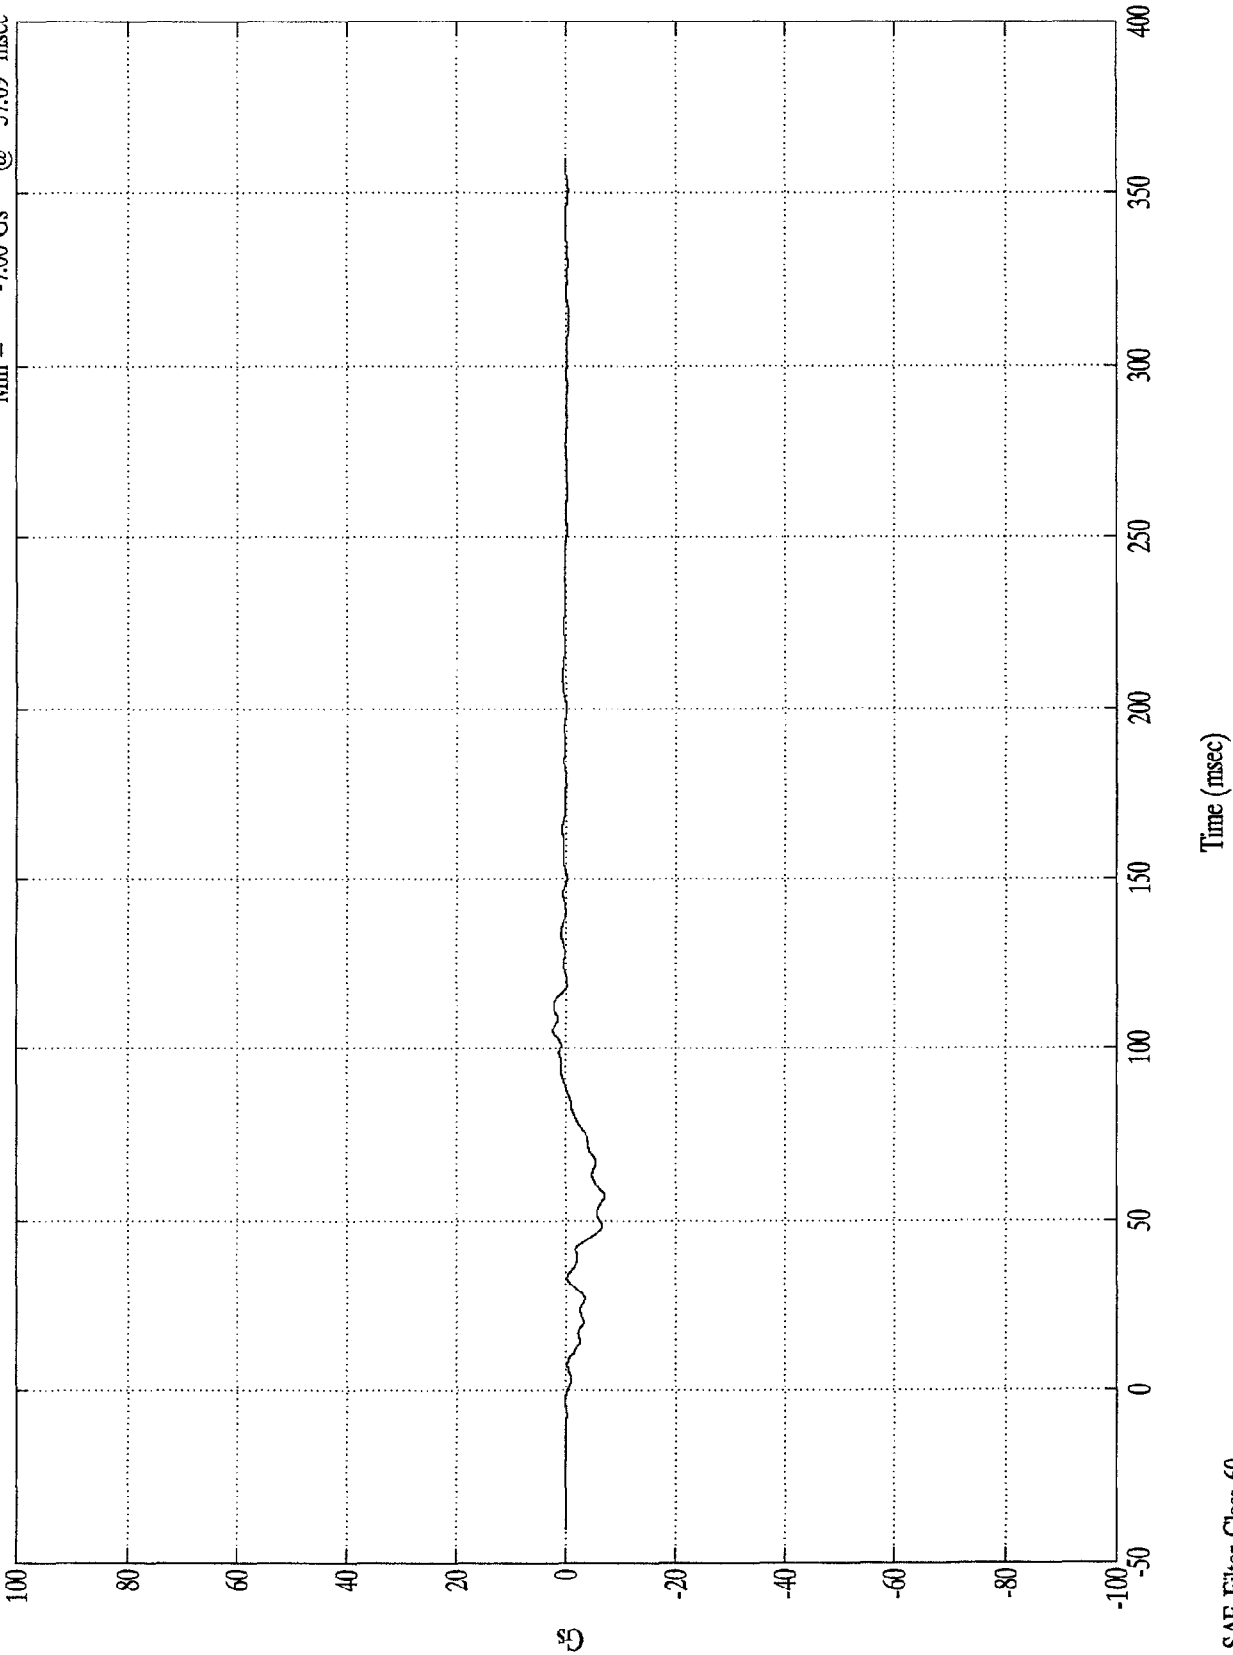


SAE Filter Class 60

VIV TEST Ford Escort/Olds Cutlass

1st Integral V2 Right Y

Max = .00 kph @ 0.00 msec
Min = -9.08 kph @ 87.20 msec

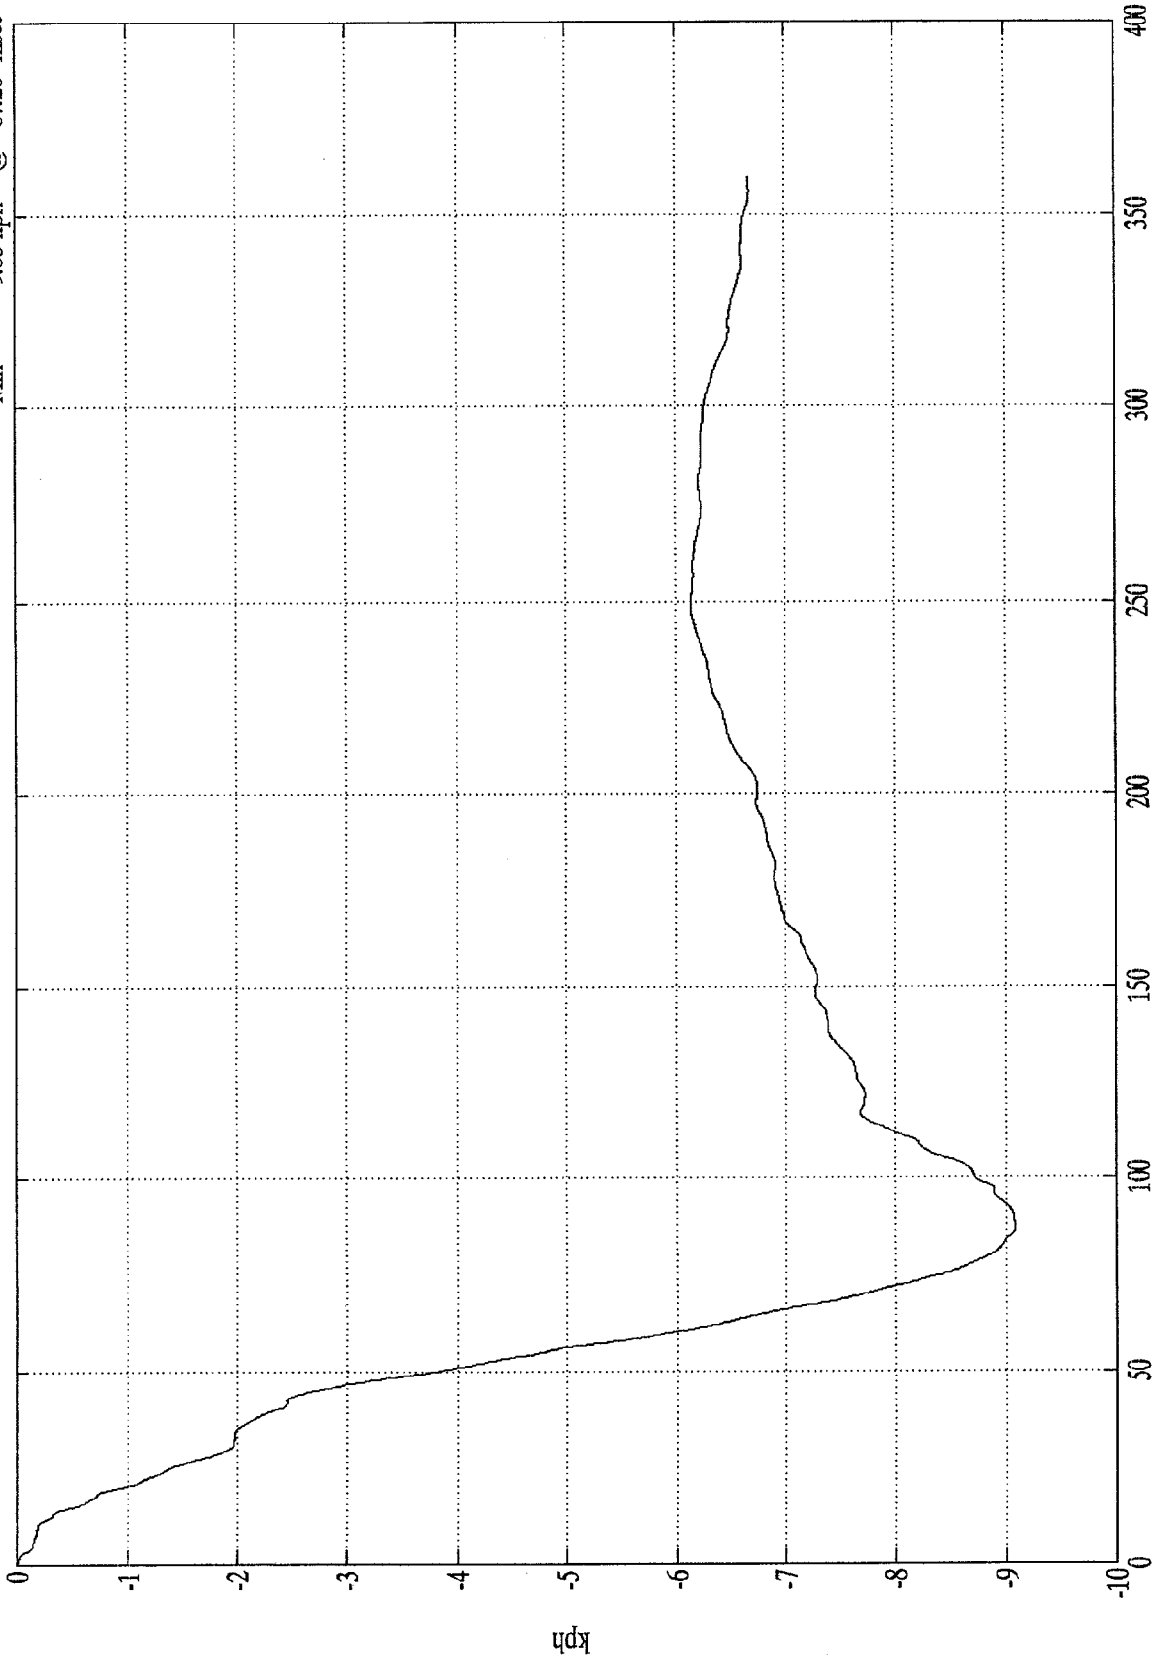

Time (msec)


SAE Filter Class 180

kph

D-49

8404-5

VTV TEST Ford Escort/Olds Cutlass

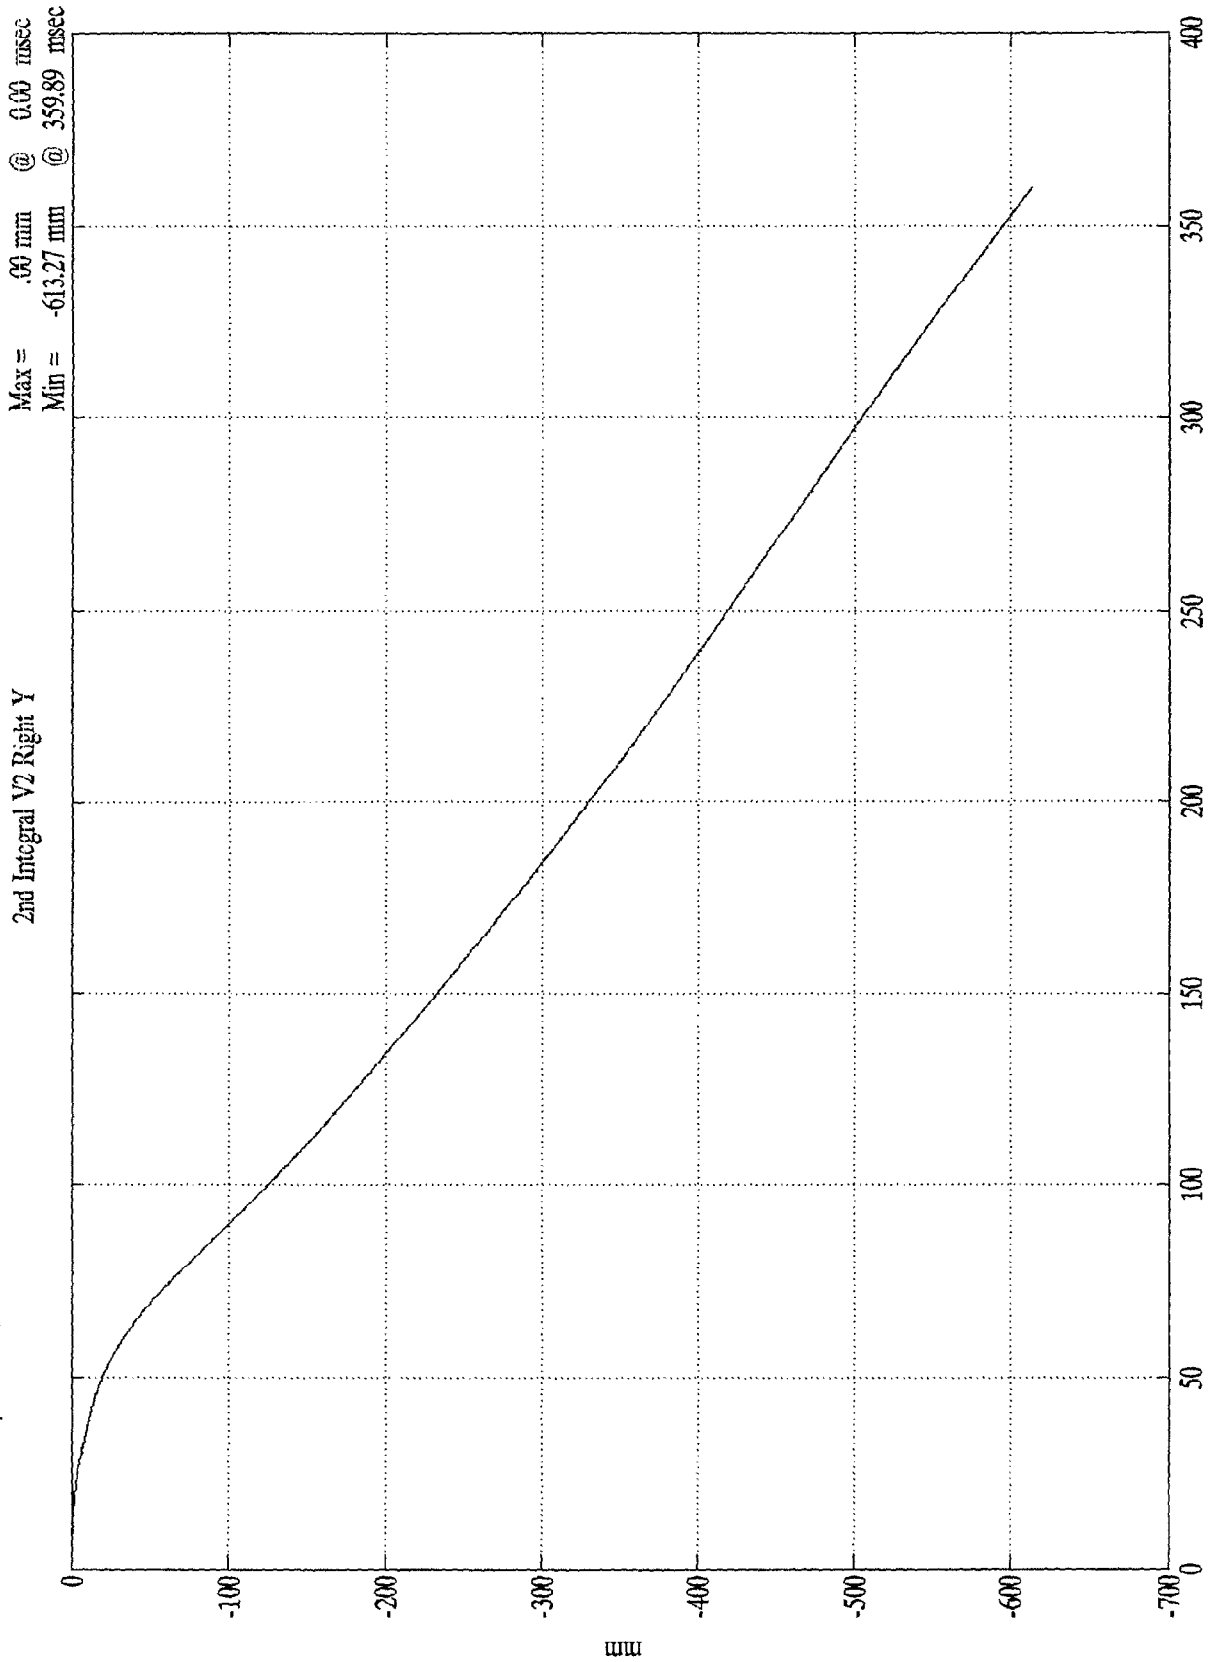

Time (msec)

mm

D-50

8404-5

SAE Filter Class 180


TEST NO. A109-5-1716

VEHICLE 1 - DUMMY DATA

CHANNEL	SAE FILTER CHANNEL CLASS
Head Accelerations	1000
Chest Accelerations	180
Femur Forces	600
Torso Belt	60
Chest Displacement	180
Neck Forces	1000
Neck Moments	600
Tibia Forces, Moments	600

VTV TEST Ford Escort/Olds Cutlass

P1 Head X
Max = 21.75 Gs @ 175.59 msec
Min = -23.96 Gs @ 77.59 msec

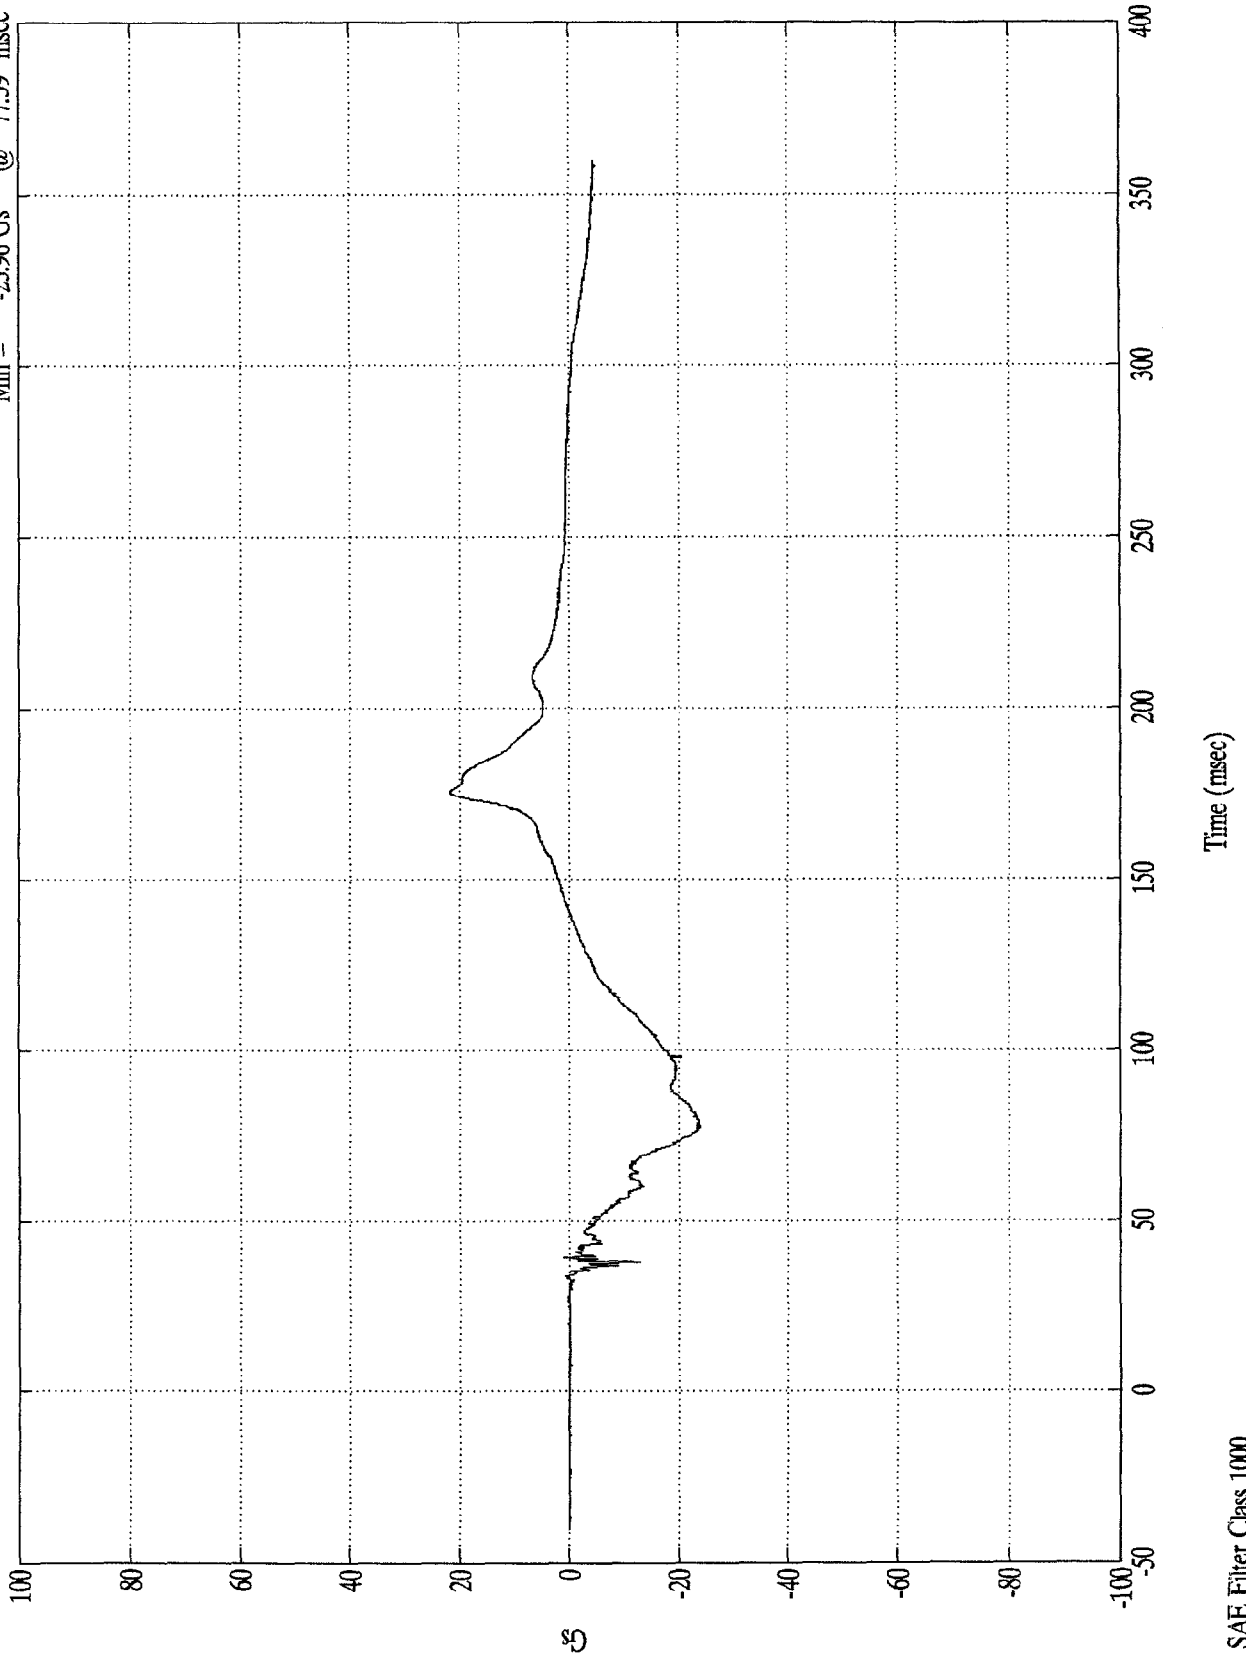


8

D-52

8404-5

SAE Filter Class 1000


VIV TEST Ford Escort/Olds Cutlass

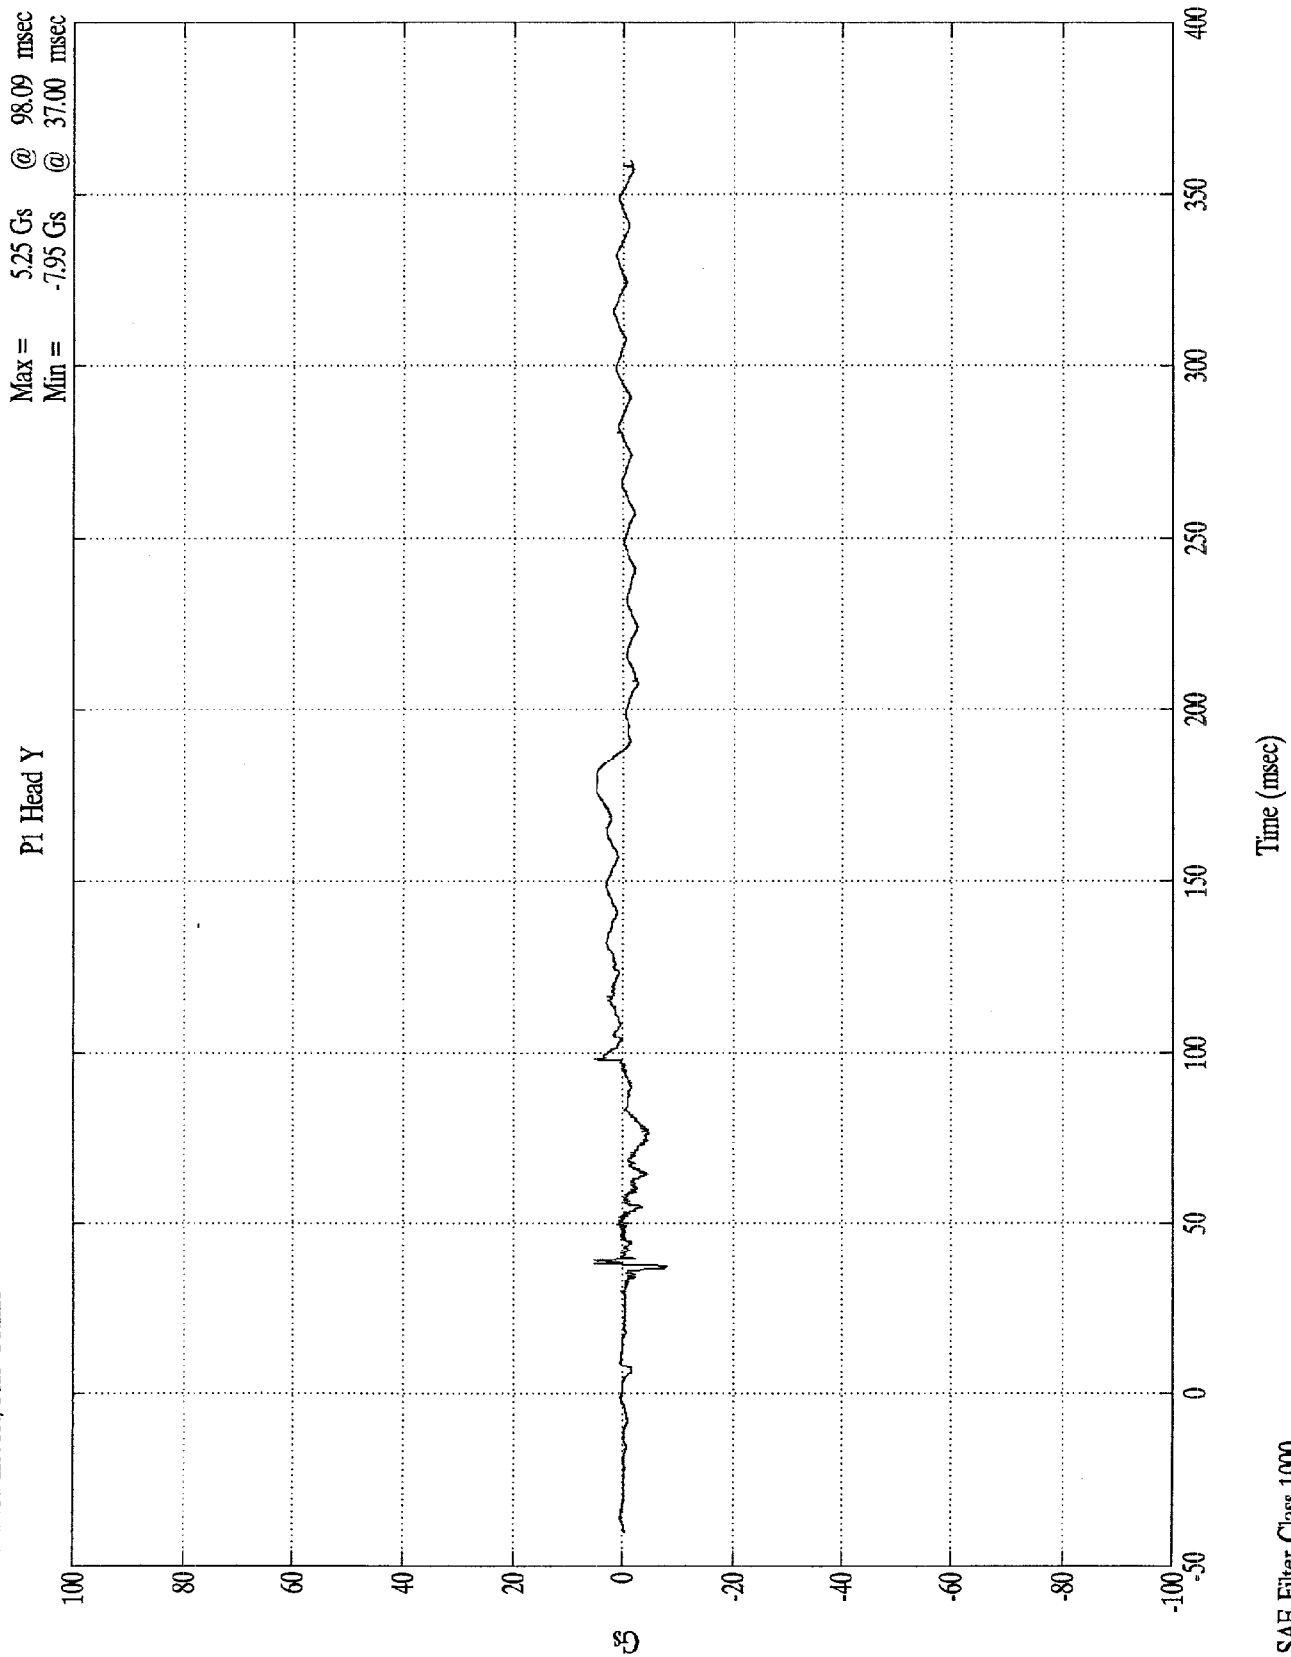

VTV TEST Ford Escort/Olds Cutlass

Max = 7.03 Gs @ 43.89 msec
Min = -22.37 Gs @ 79.39 msec


P1 Head Z

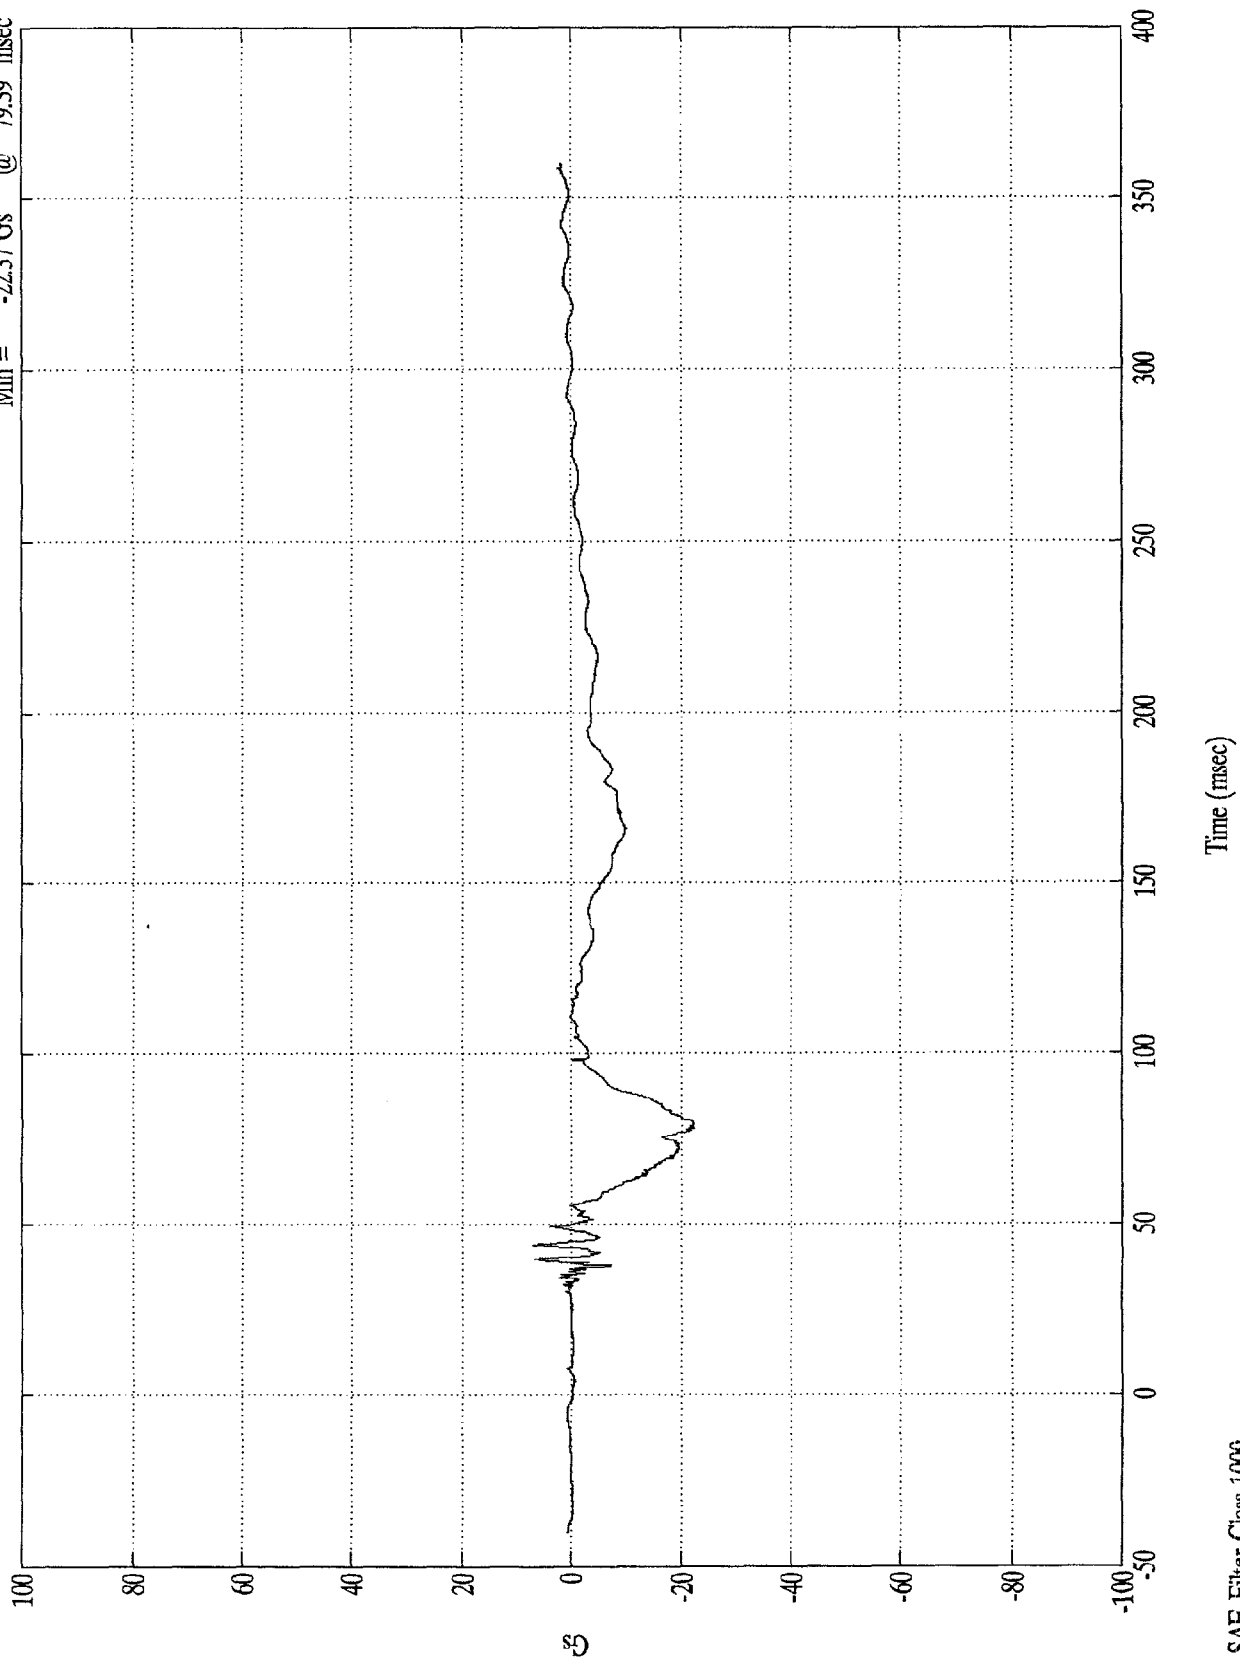


VTV TEST Ford Escort/Olds Cutlass

Max = 32.88 Gs @ 78.19 msec
Min = .05 Gs @ -18.70 msec

P1 Head Resultant

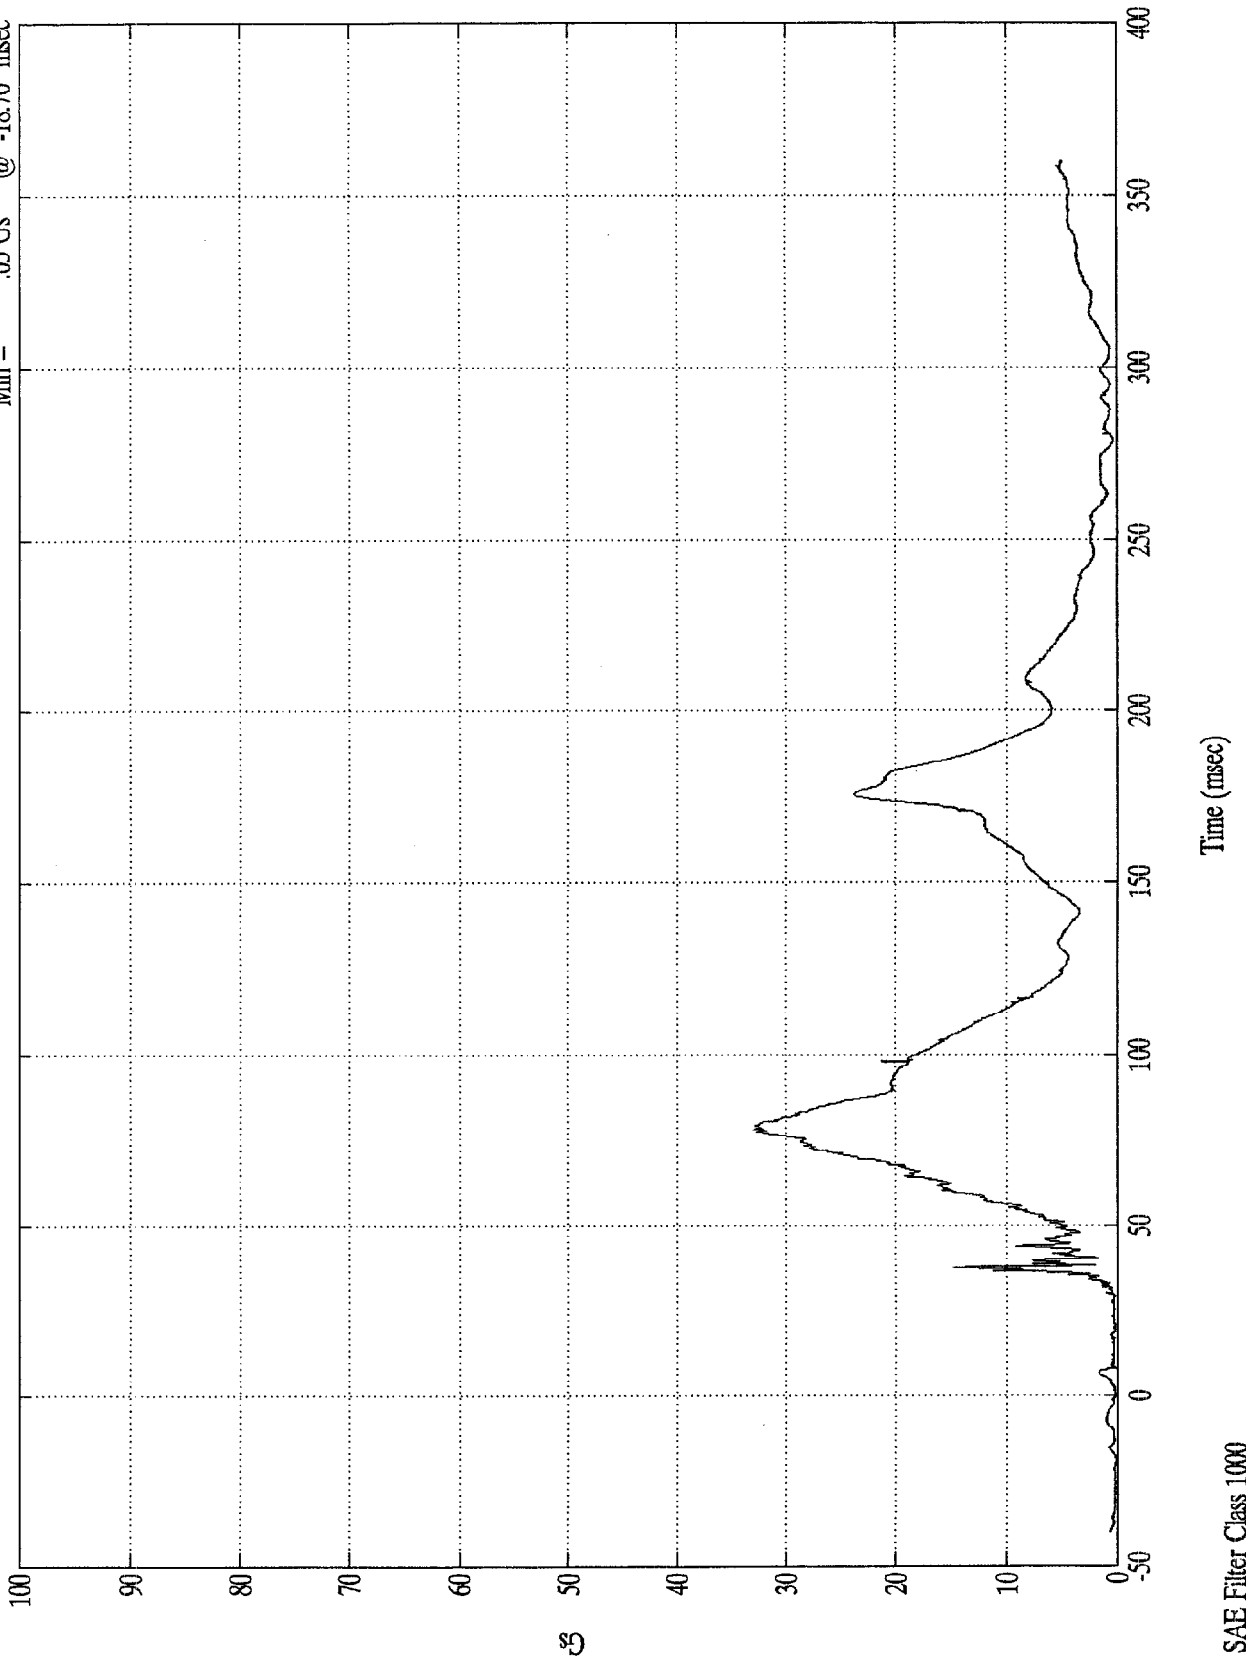


VTV TEST Ford Escort/Olds Cutlass

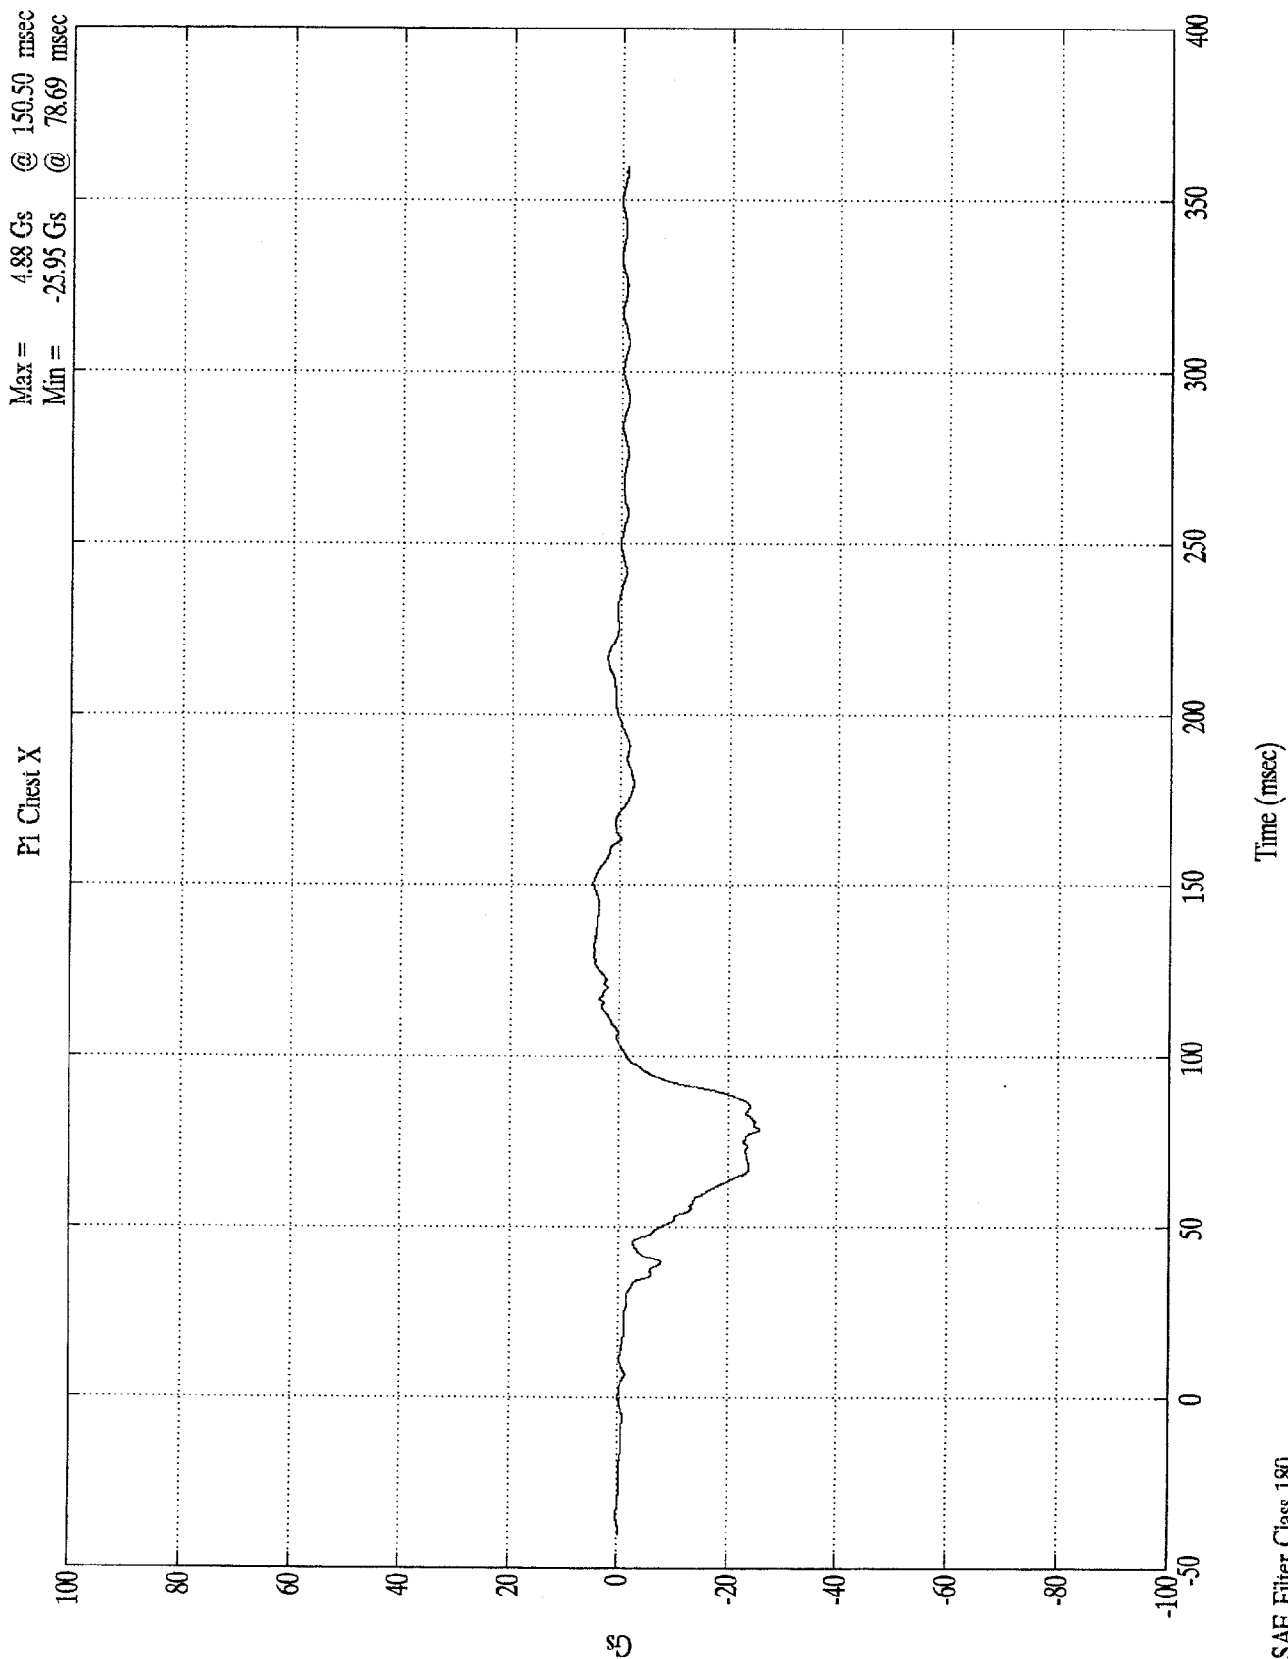

VTV TEST Ford Escort/Olds Cutlass

PI Chest Y

Max = 10.90 Gs @ 79.79 msec
Min = -2.14 Gs @ 165.19 msec

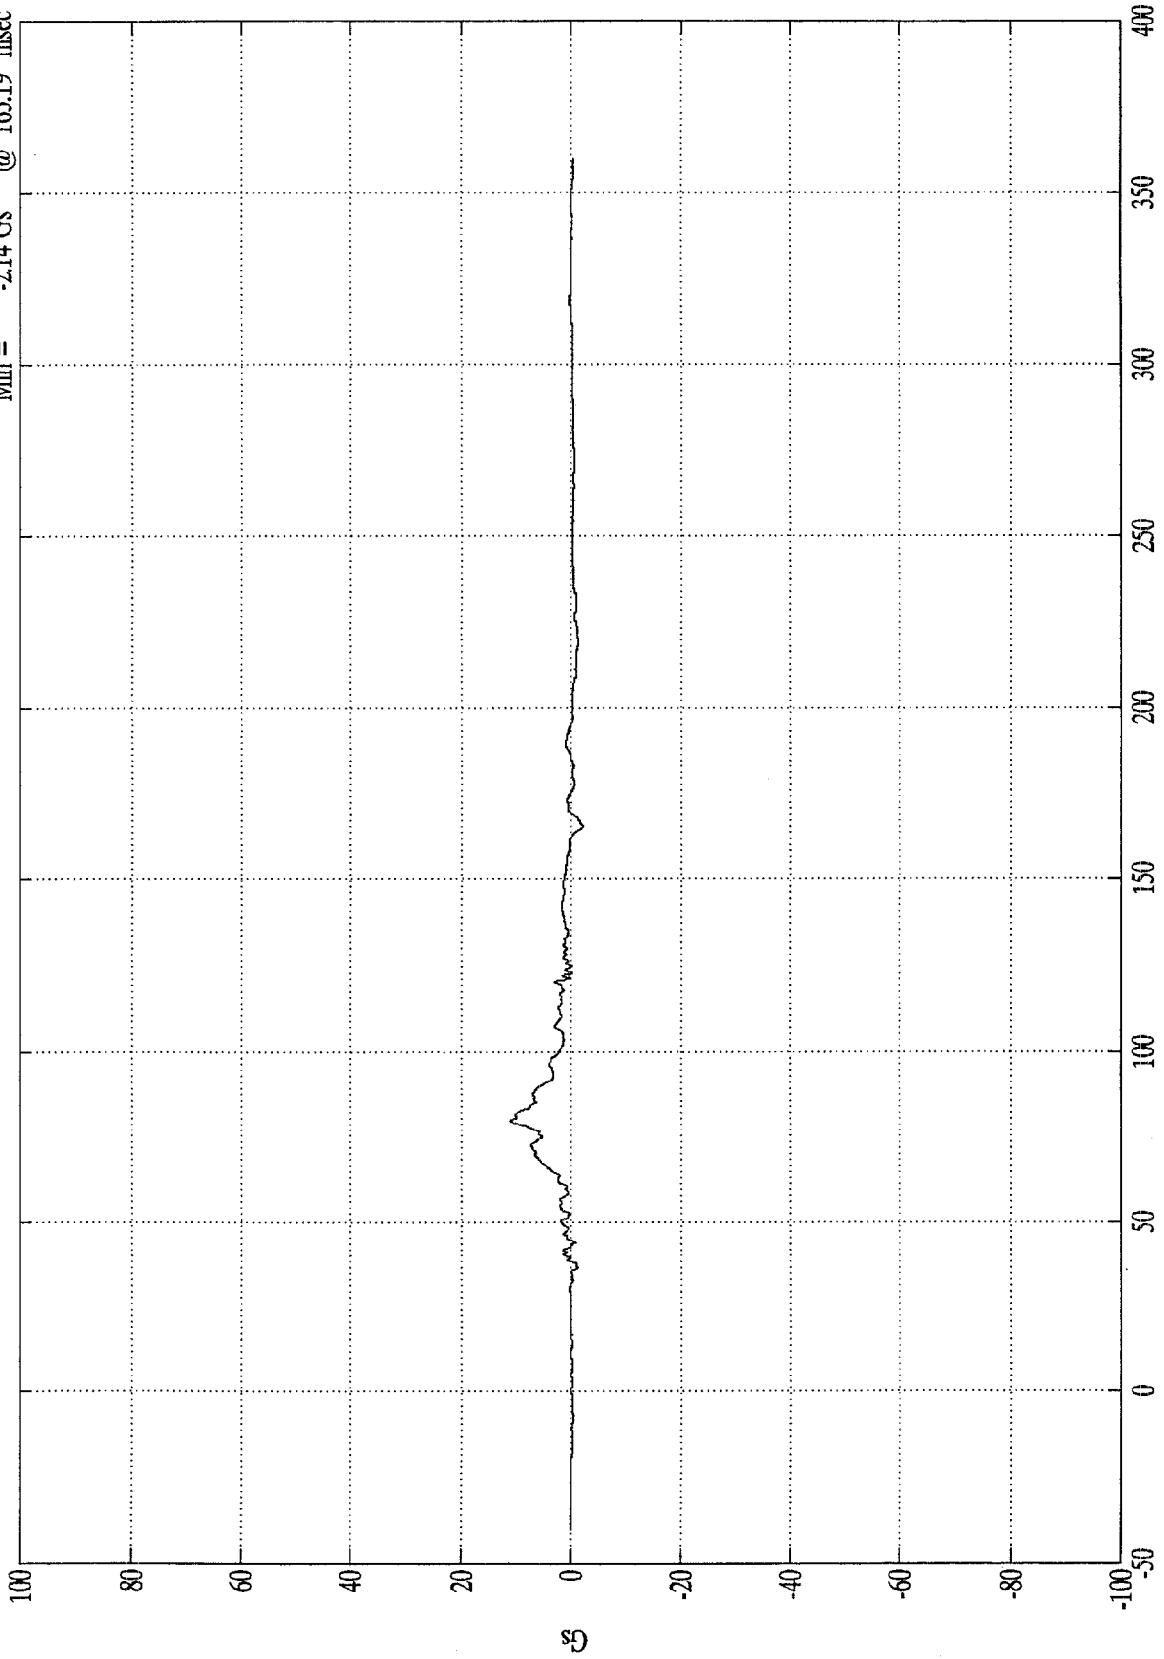


D-57


8404-5

SAE Filter Class 180


VTV TEST Ford Escort/Olds Cutlass

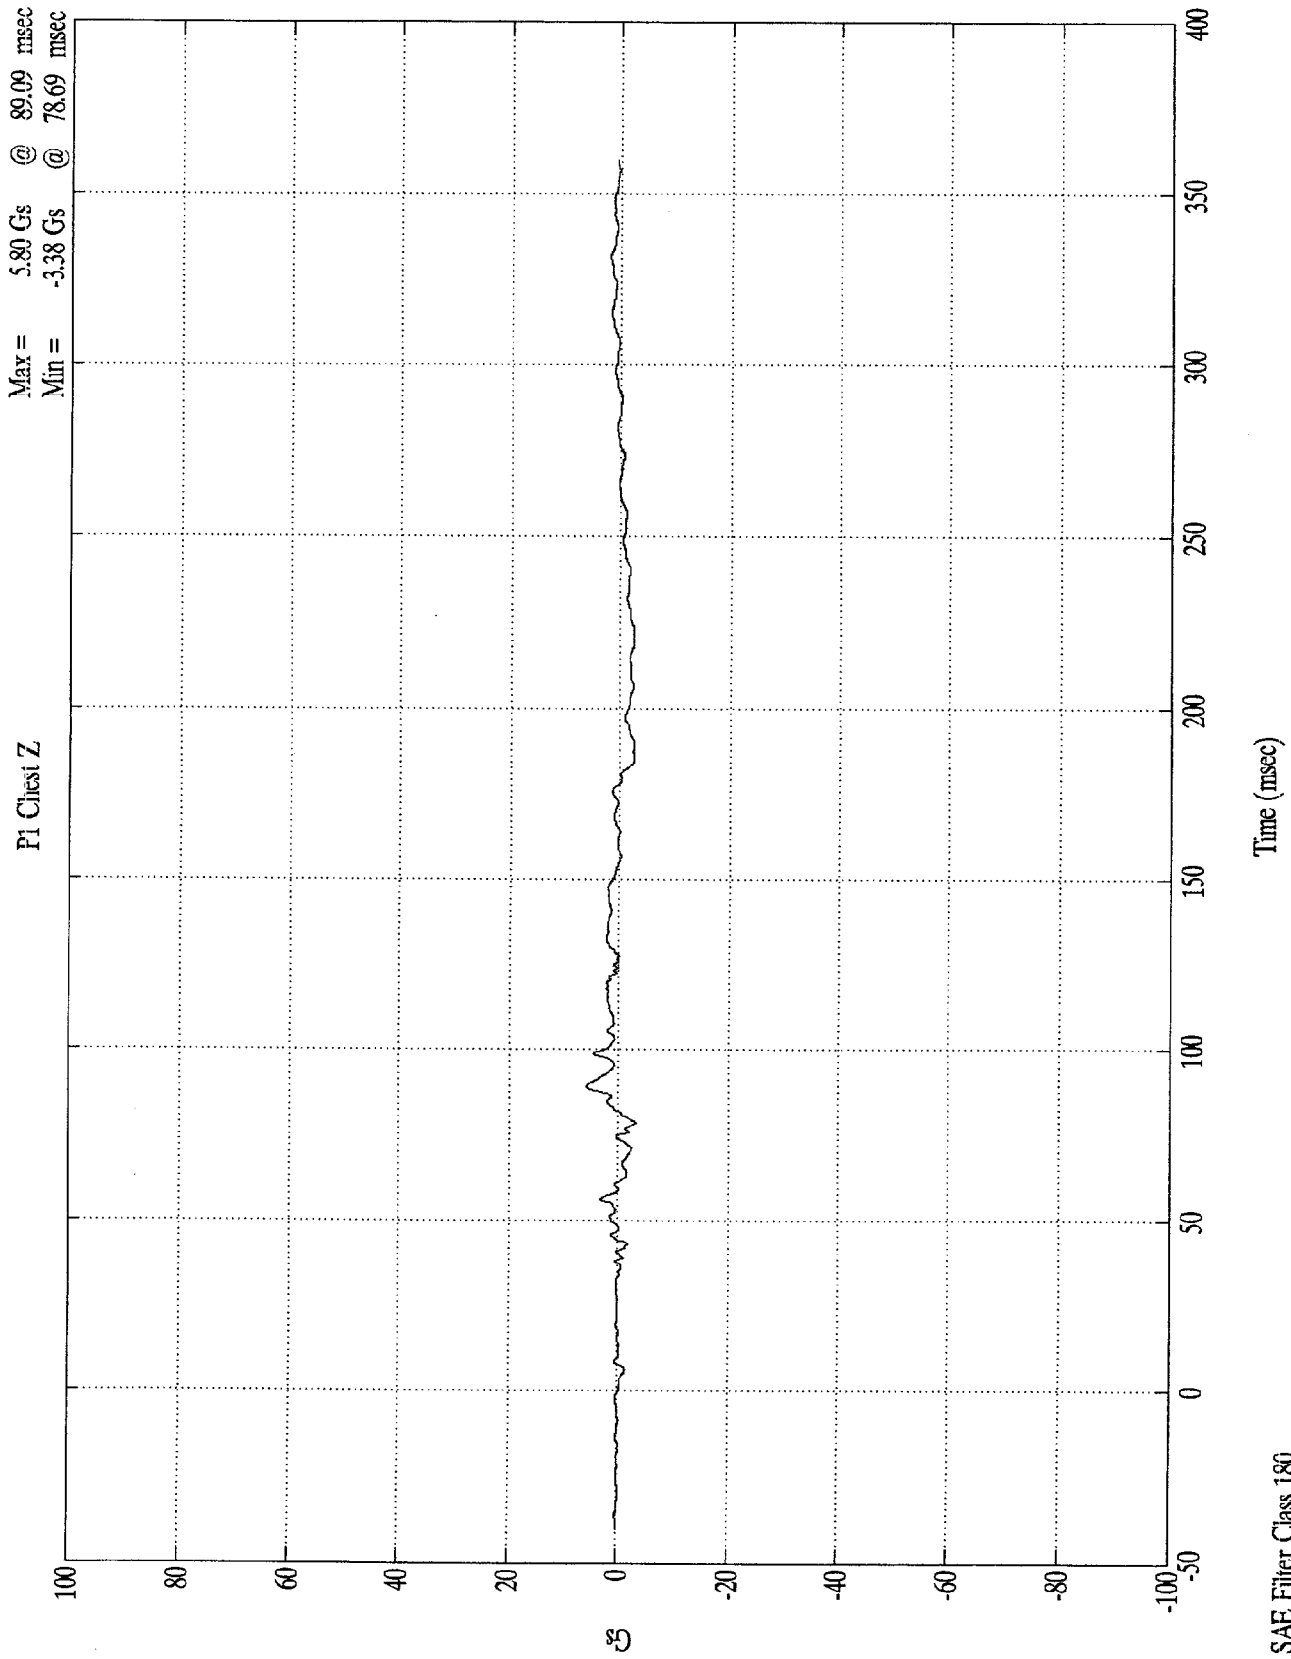

VTV TEST Ford Escort/Olds Cutlass

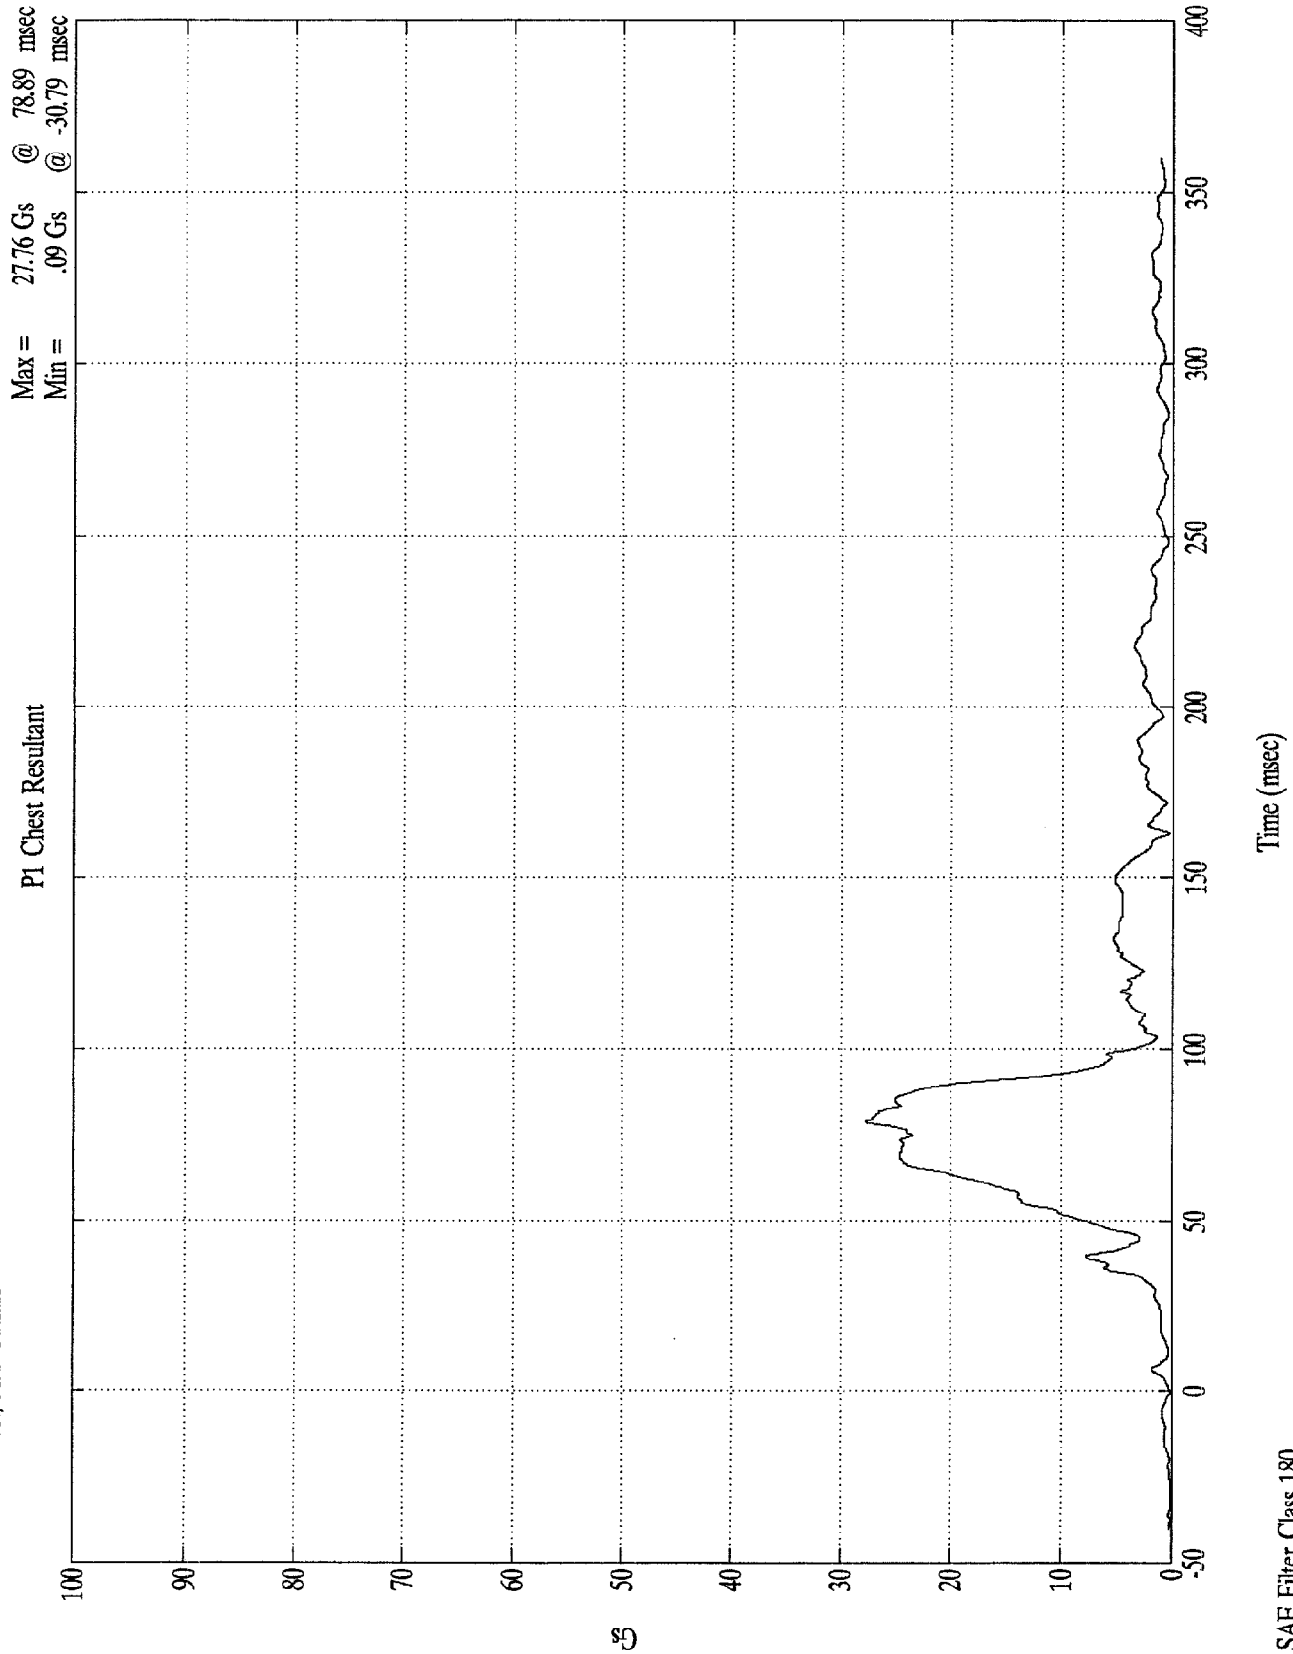


VTV TEST Ford Escort/Olds Cutlass

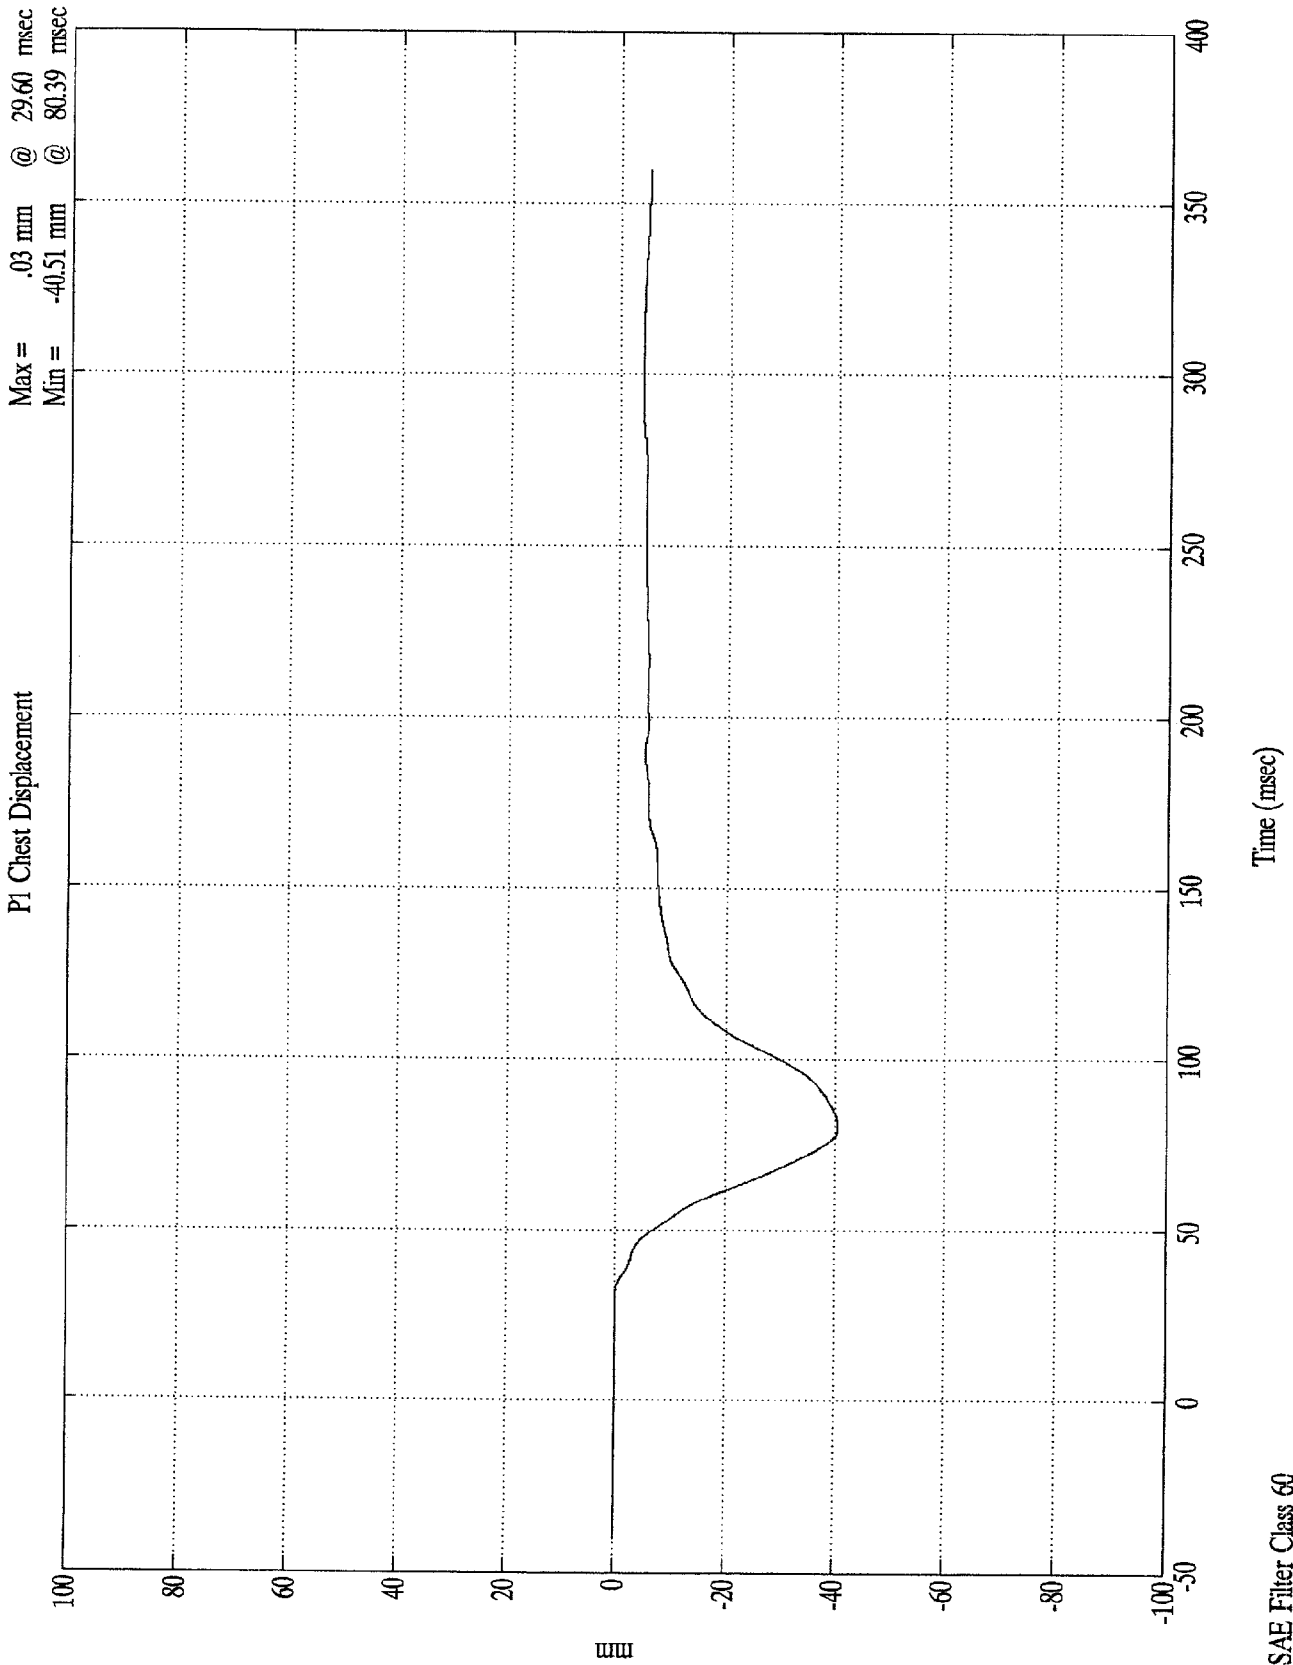

VTV TEST Ford Escort/Olds Cutlass

P1 Left Femur

Max = 727.91 Nwt @ 73.59 msec
Min = -601.19 Nwt @ 98.00 msec

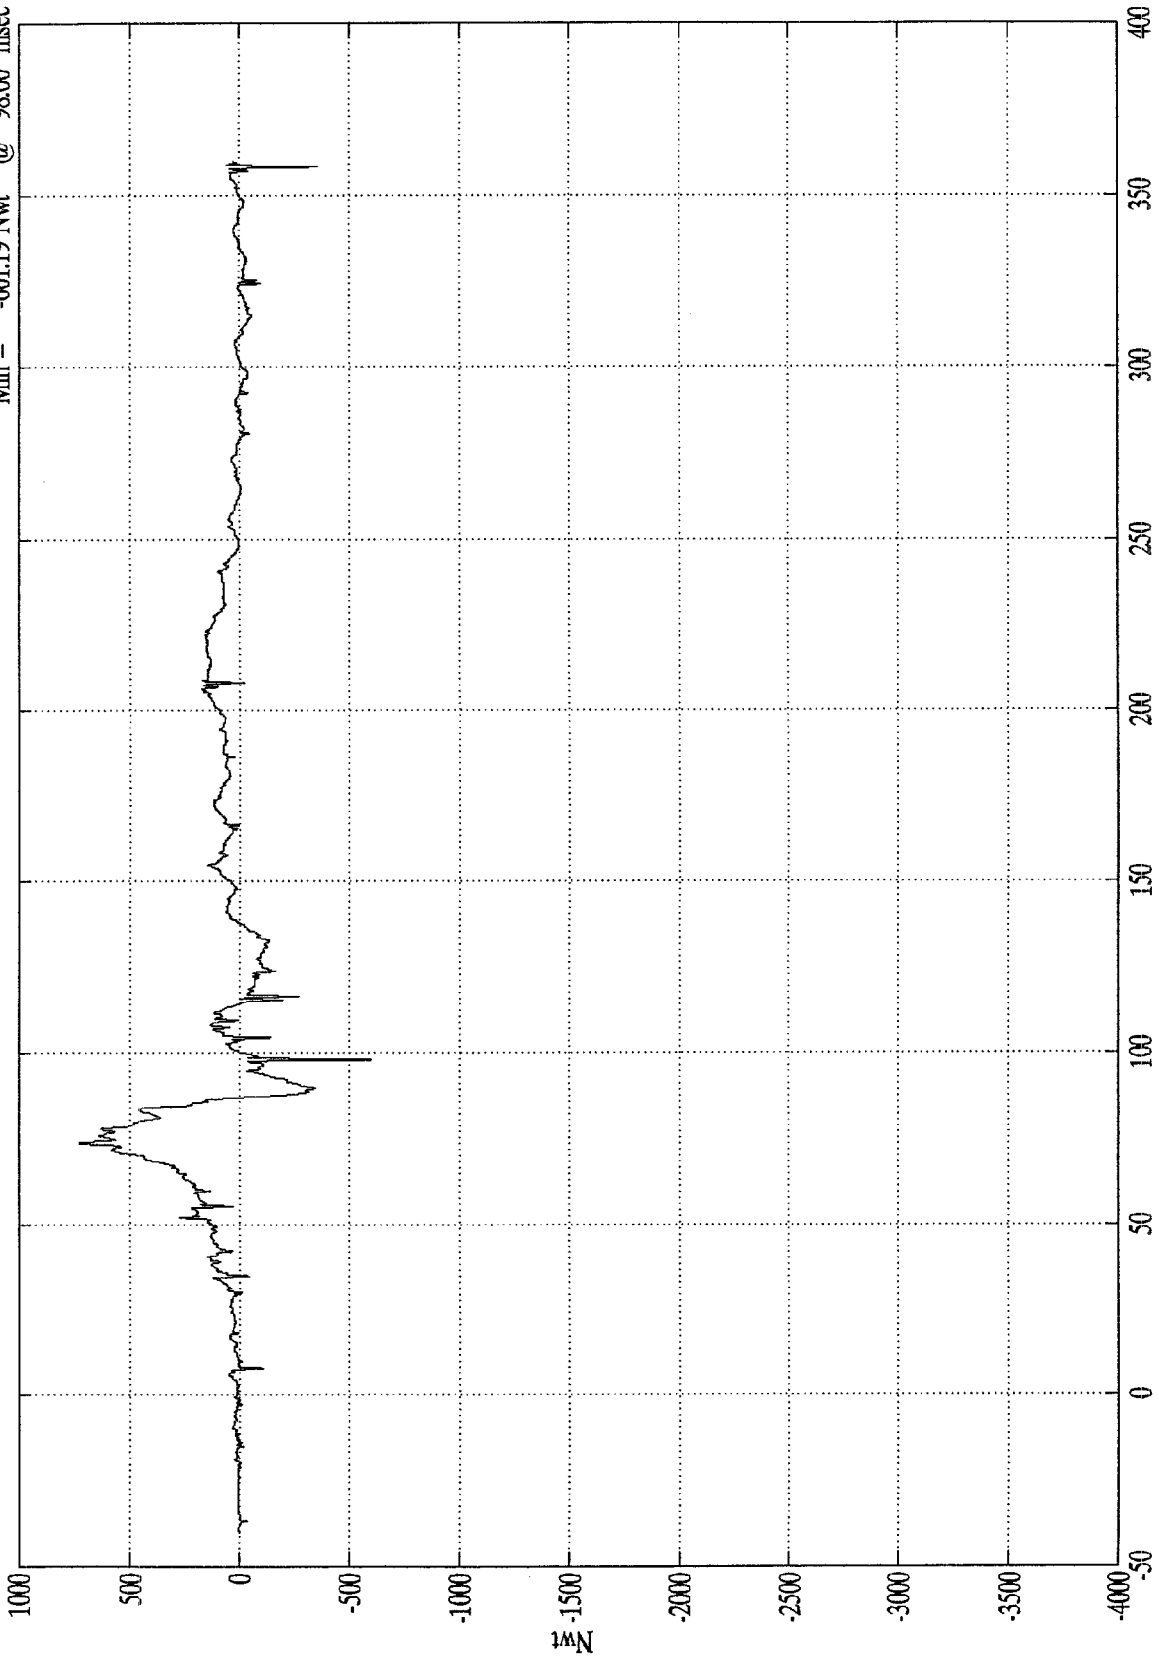


Time (msec)

SAE Filter Class 600

VTV TEST Ford Escort/Olds Cutlass

Max = 453.61 Nwt @ 67.49 msec
Min = -727.02 Nwt @ 358.39 msec


P1 Right Femur

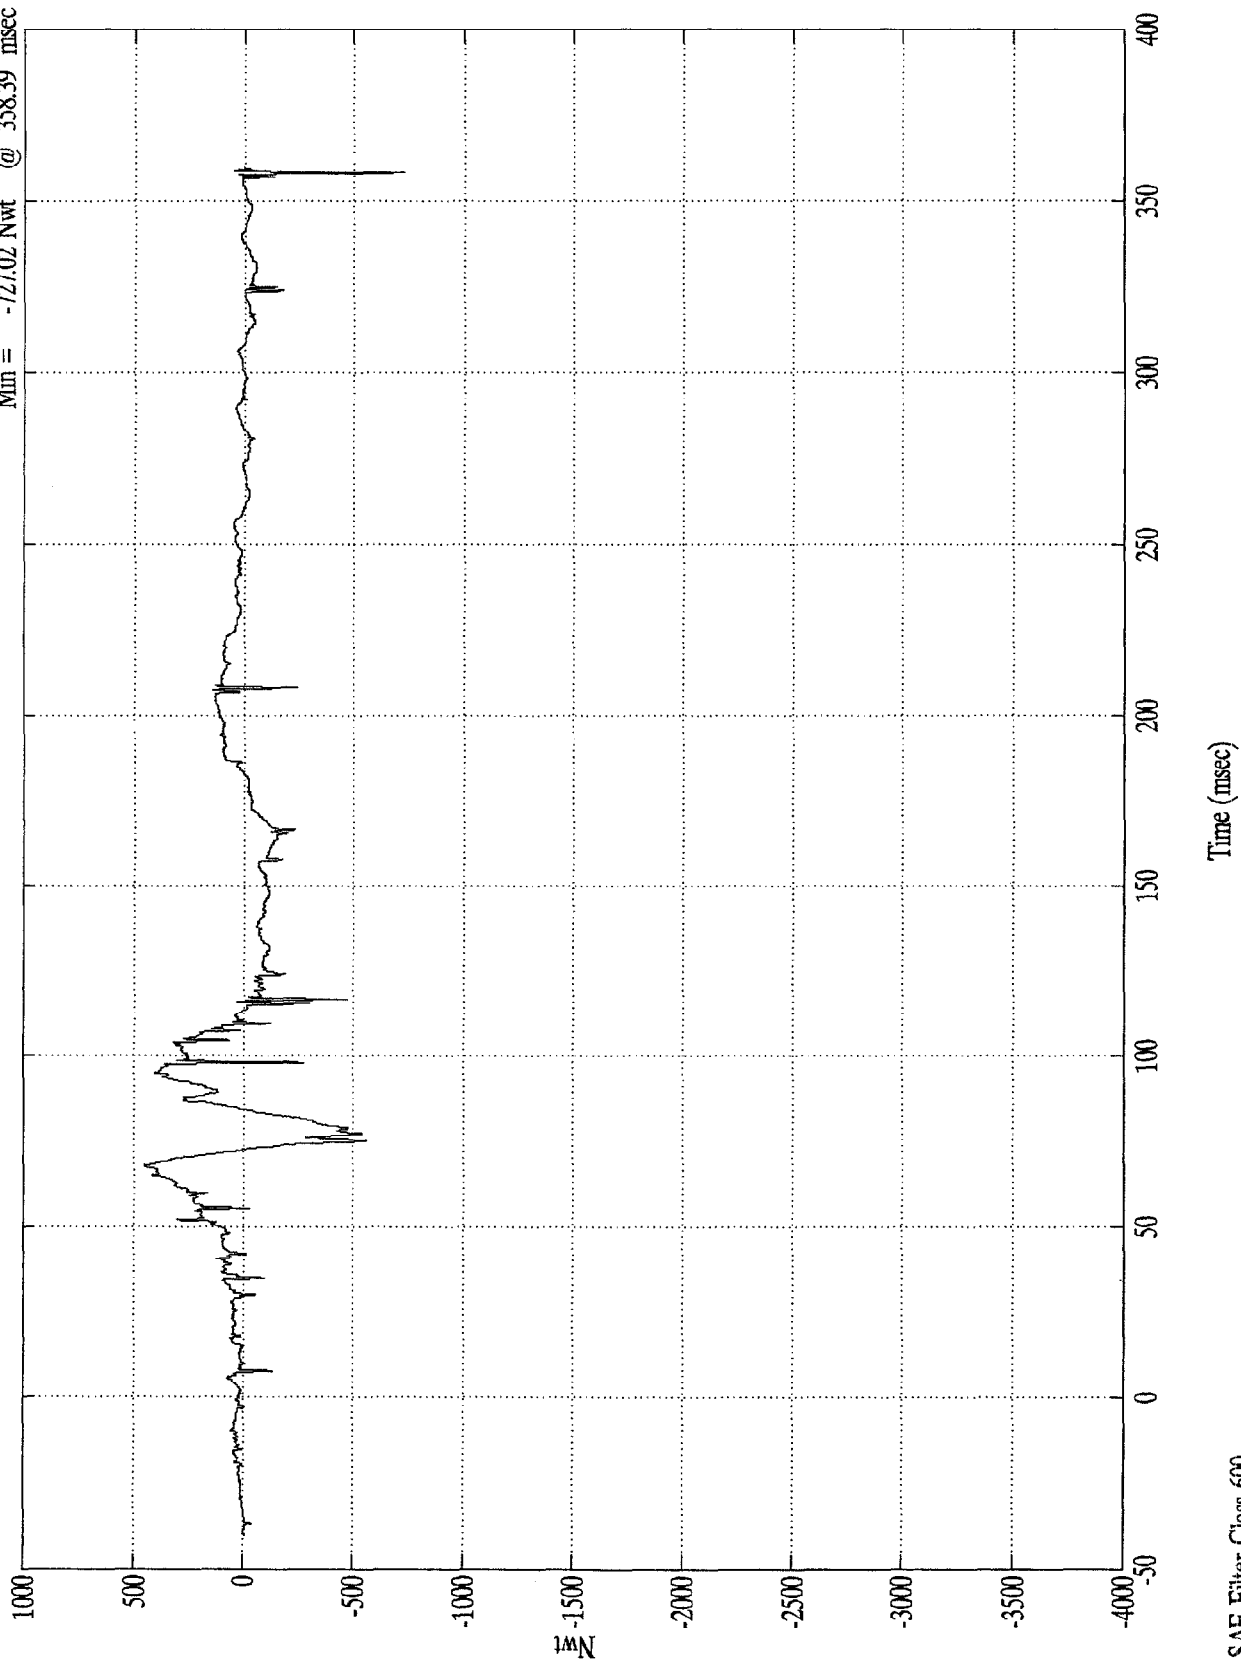

VTV TEST Ford Escort/Olds Cutlass


Max = 656.94 Nwt @ 79.50 msec
Min = -125.50 Nwt @ 186.60 msec

P1 Upper Neck Fx

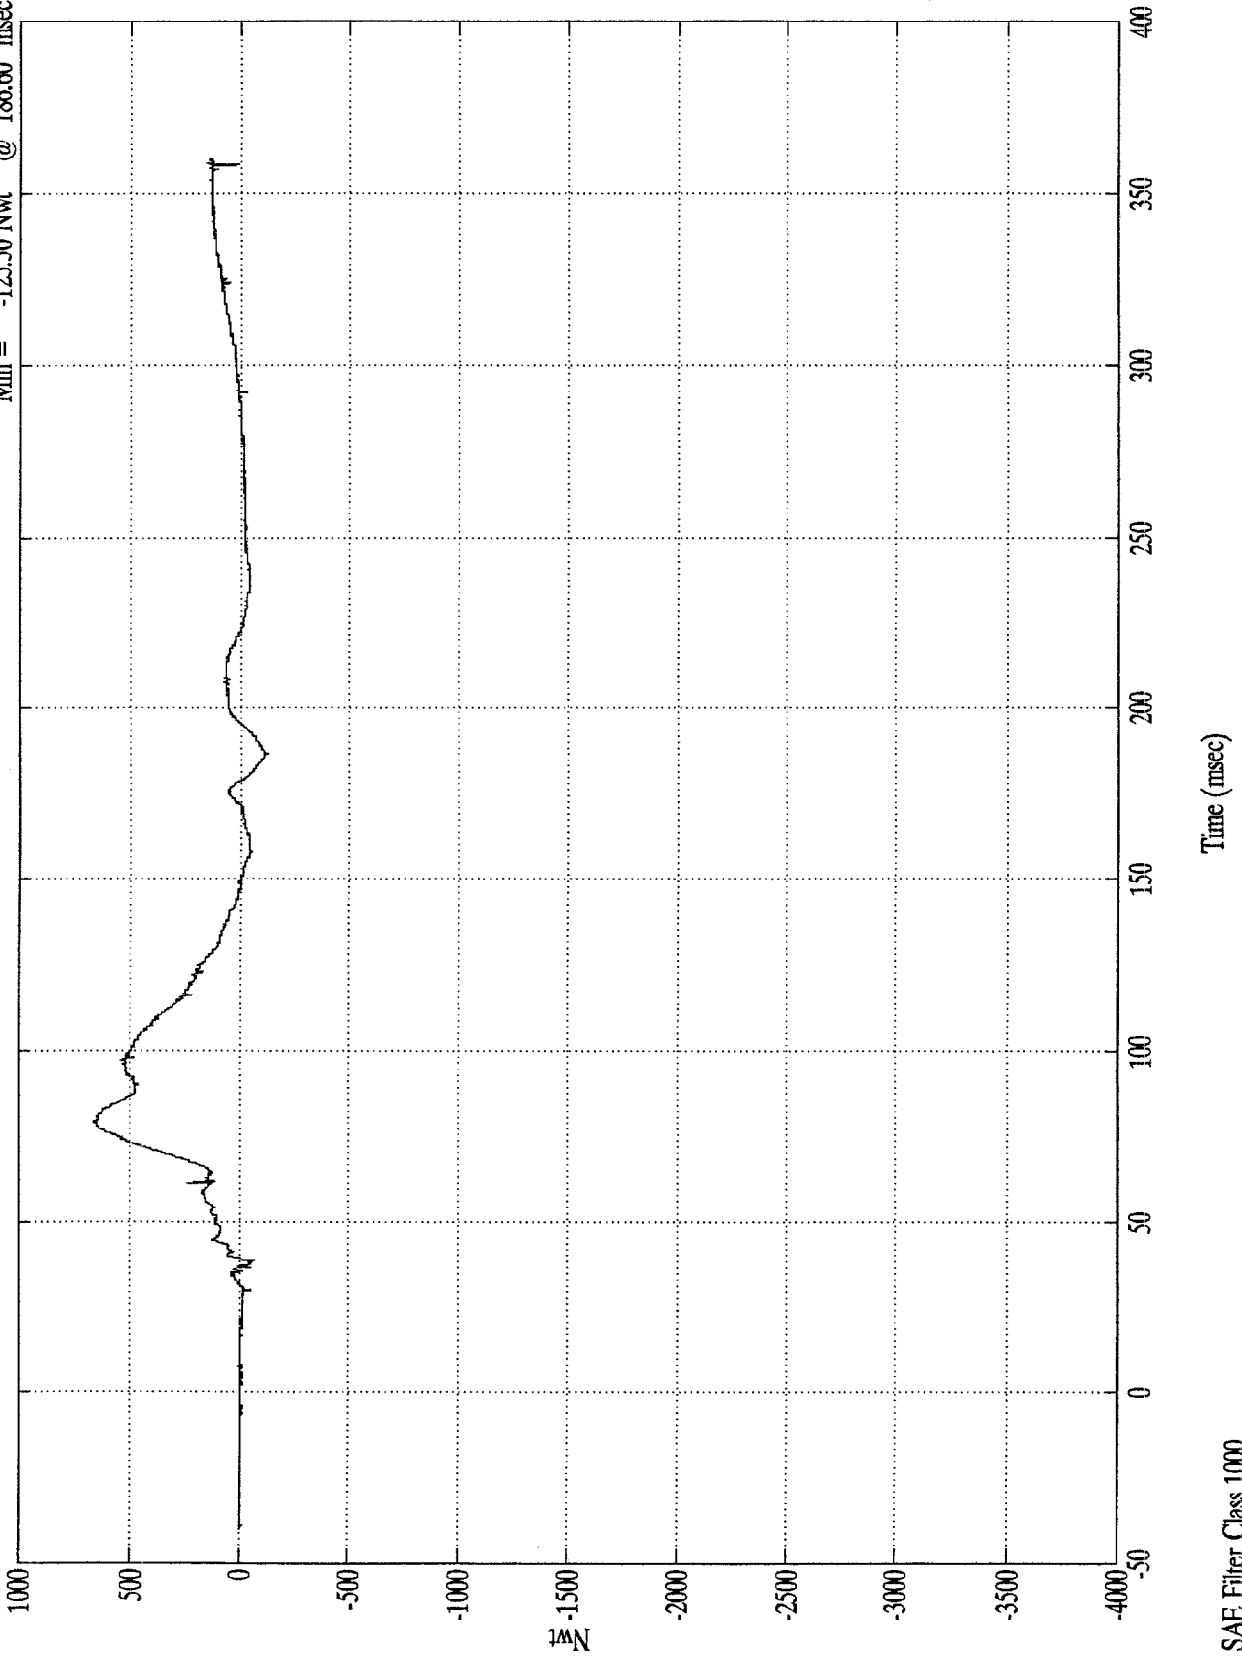

SAE Filter Class 1000


VTV TEST Ford Escort/Olds Cutlass

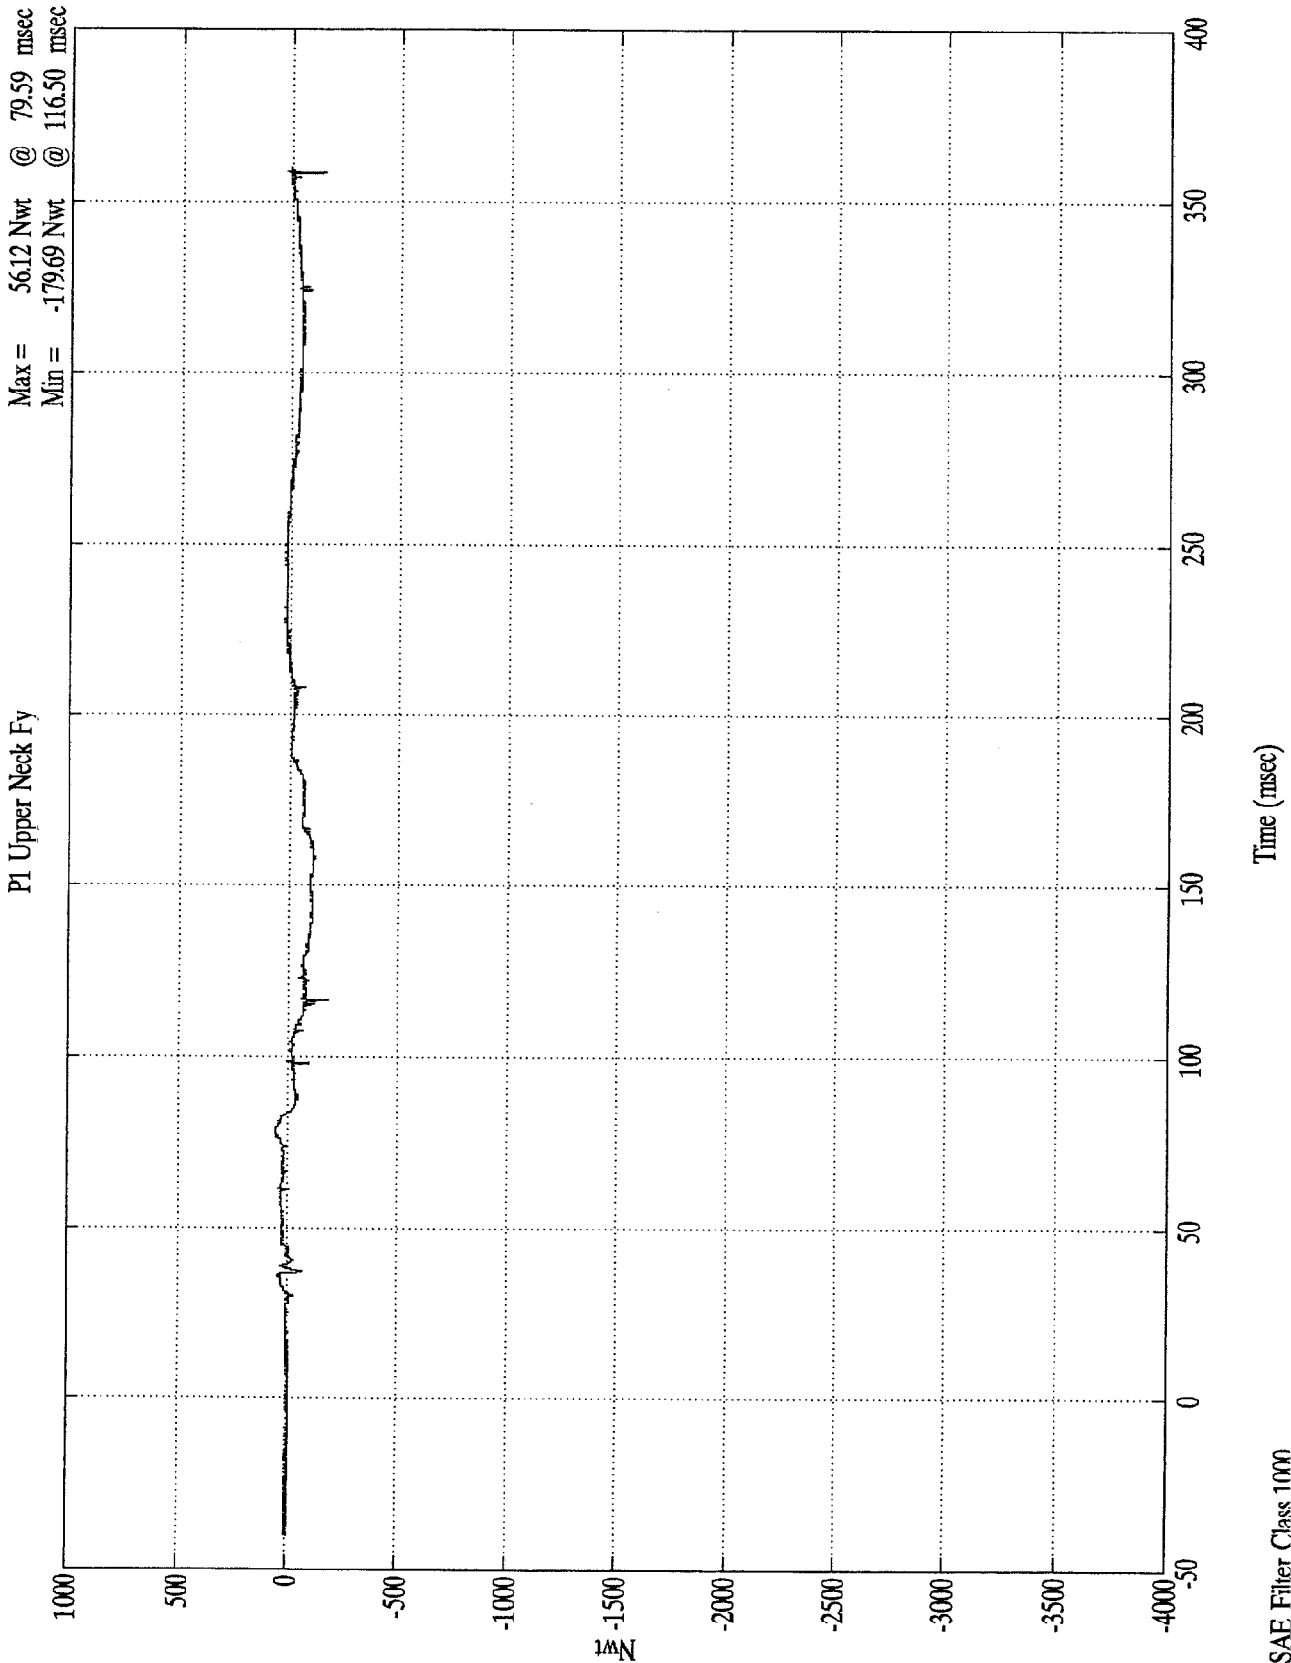

VTV TEST Ford Escort/Olds Cutlass

P1 Upper Neck Fz

Max = 1420.27 Nwt @ 73.00 msec
Min = -273.99 Nwt @ 30.00 msec

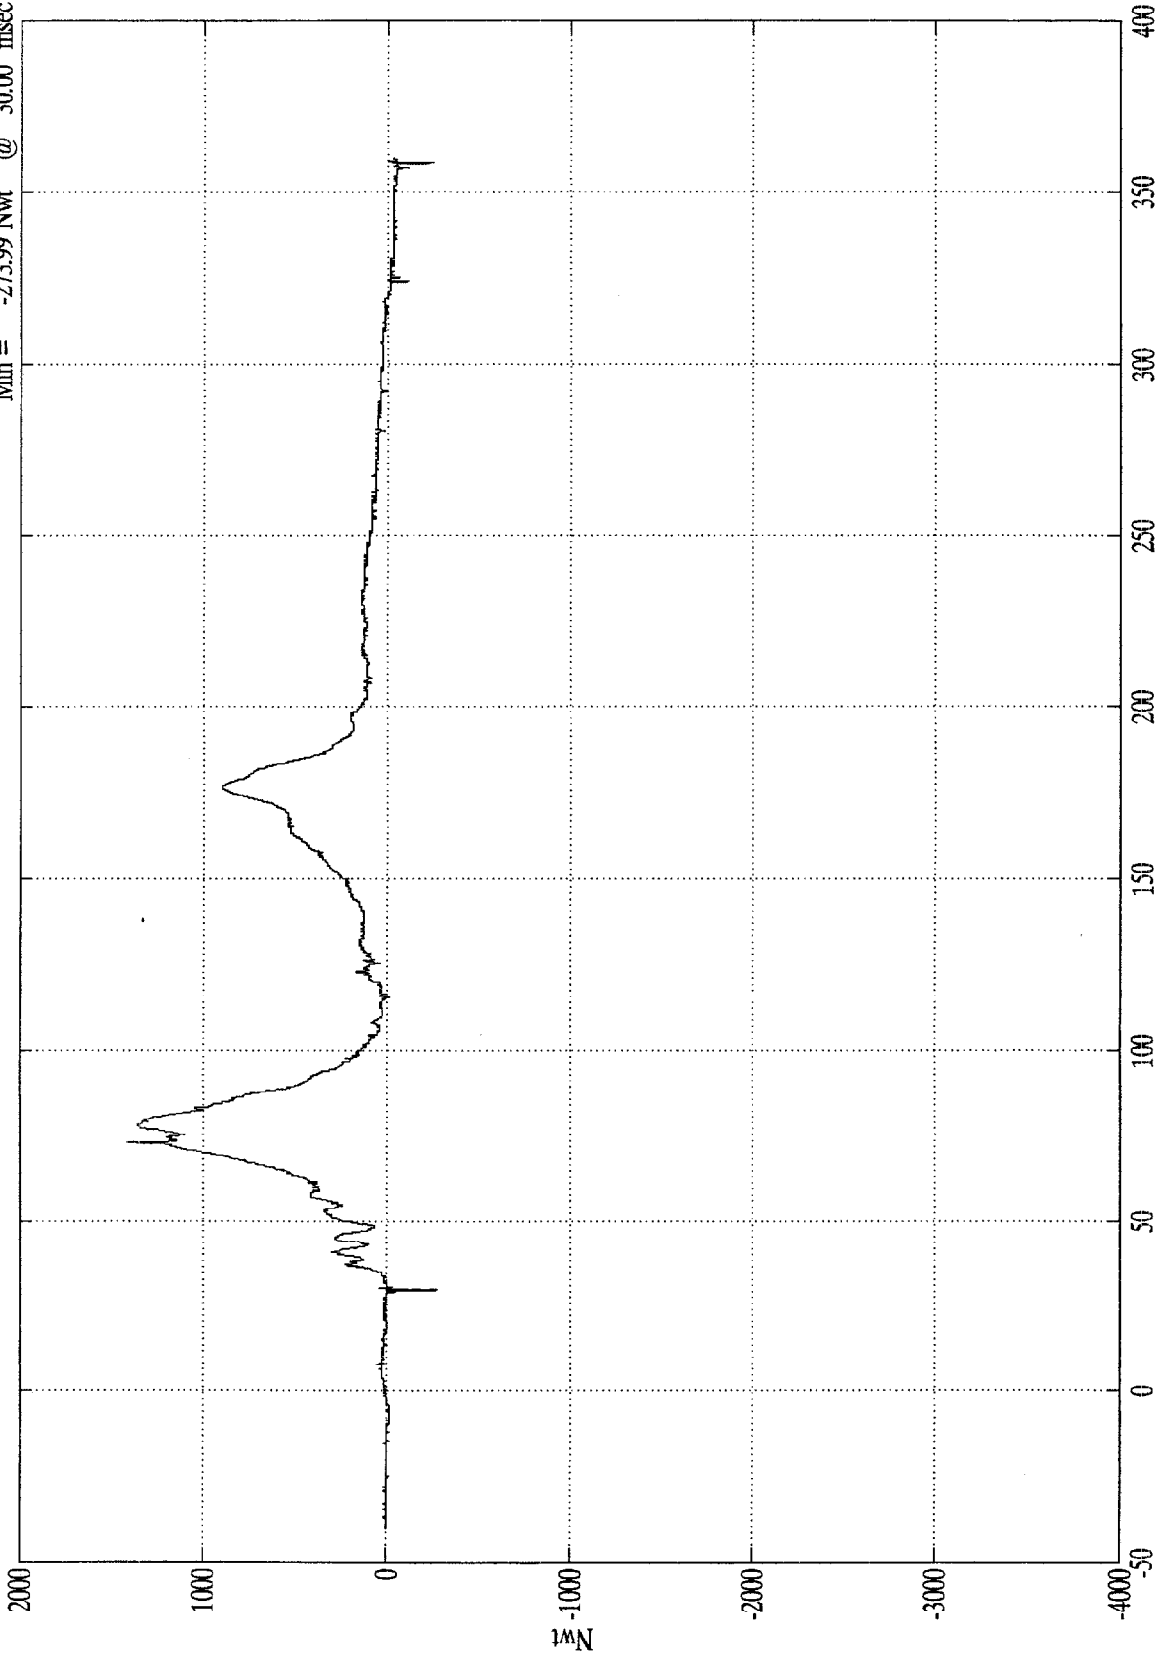


Time (msec)

SAE Filter Class 1000

VTV TEST Ford Escort/Olds Cutlass

P1 Upper Neck Force Res


Max = 1509.79 Nwt @ 78.19 msec
Min = 5.00 Nwt @ 31.30 msec

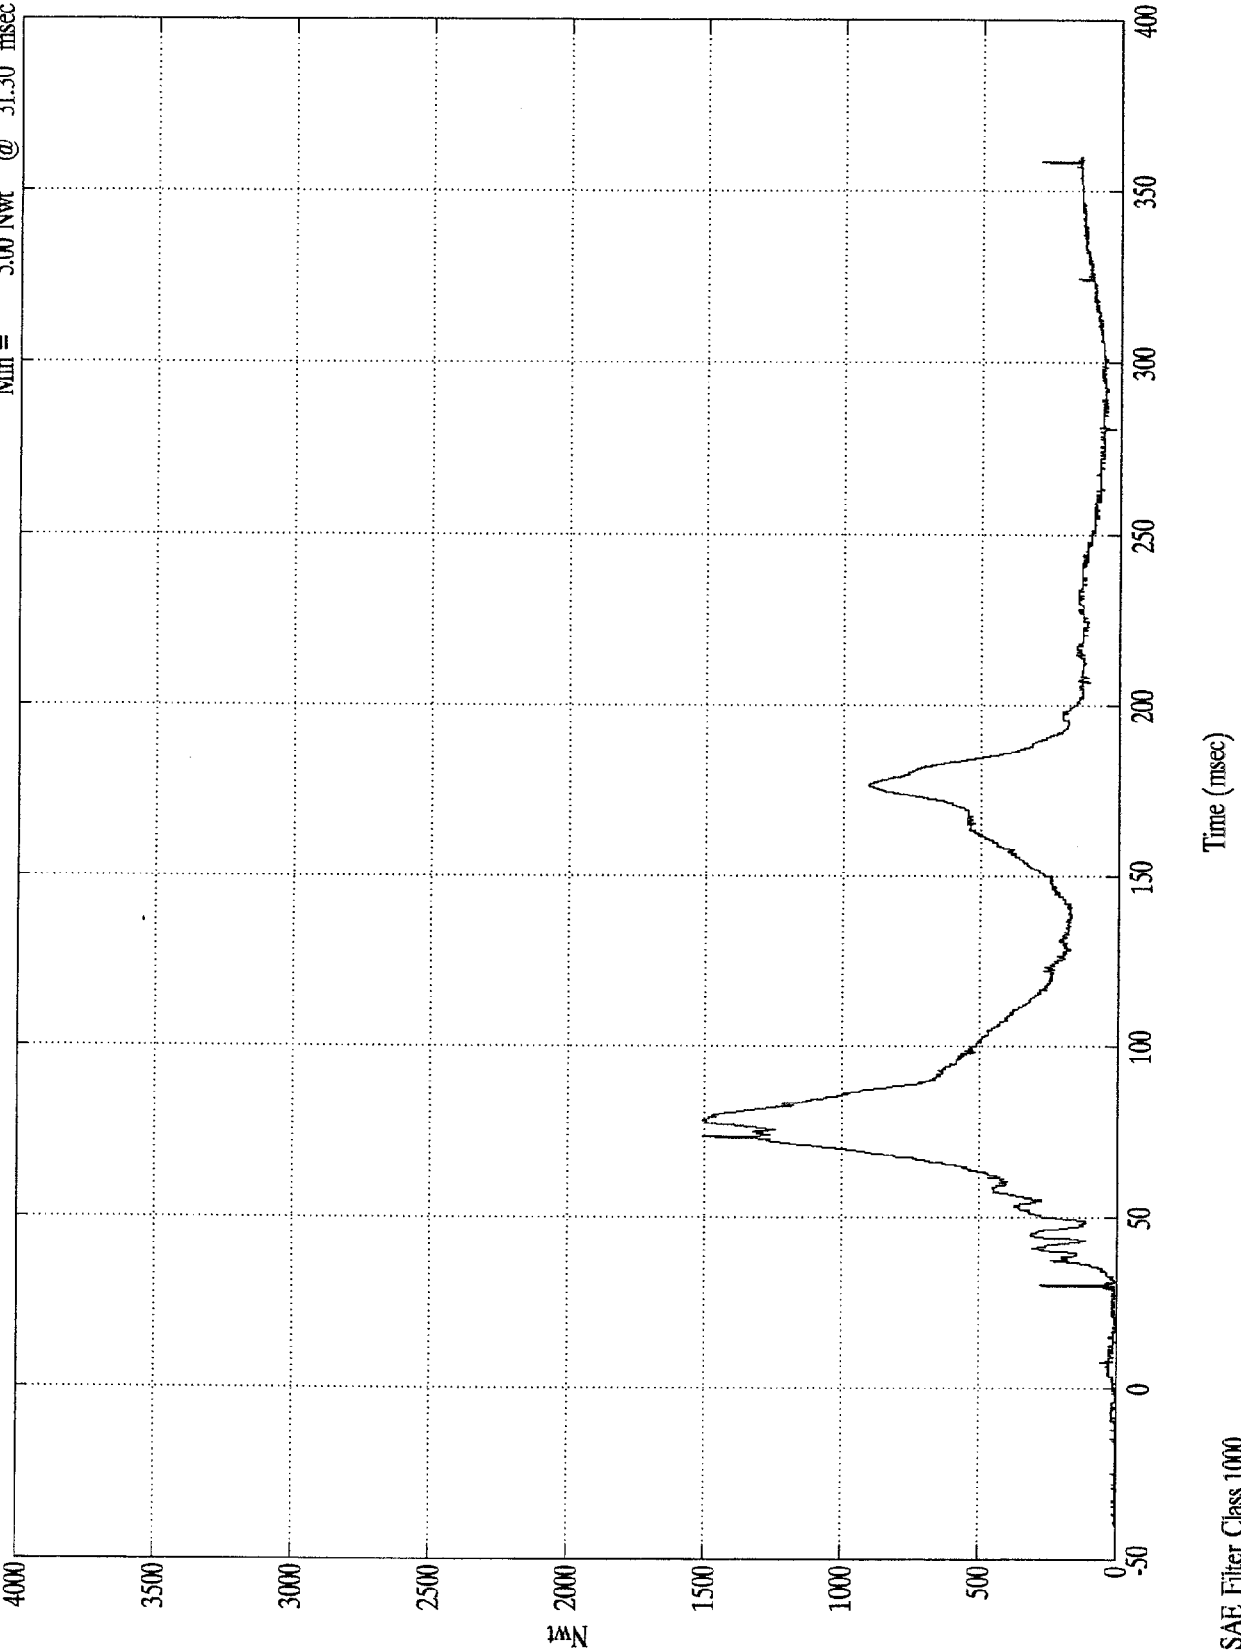

VTV TEST Ford Escort/Olds Cutlass

P1 Upper Neck Mx

Max = 8.91 N-m @ 167.59 msec
Min = -10.57 N-m @ 88.09 msec

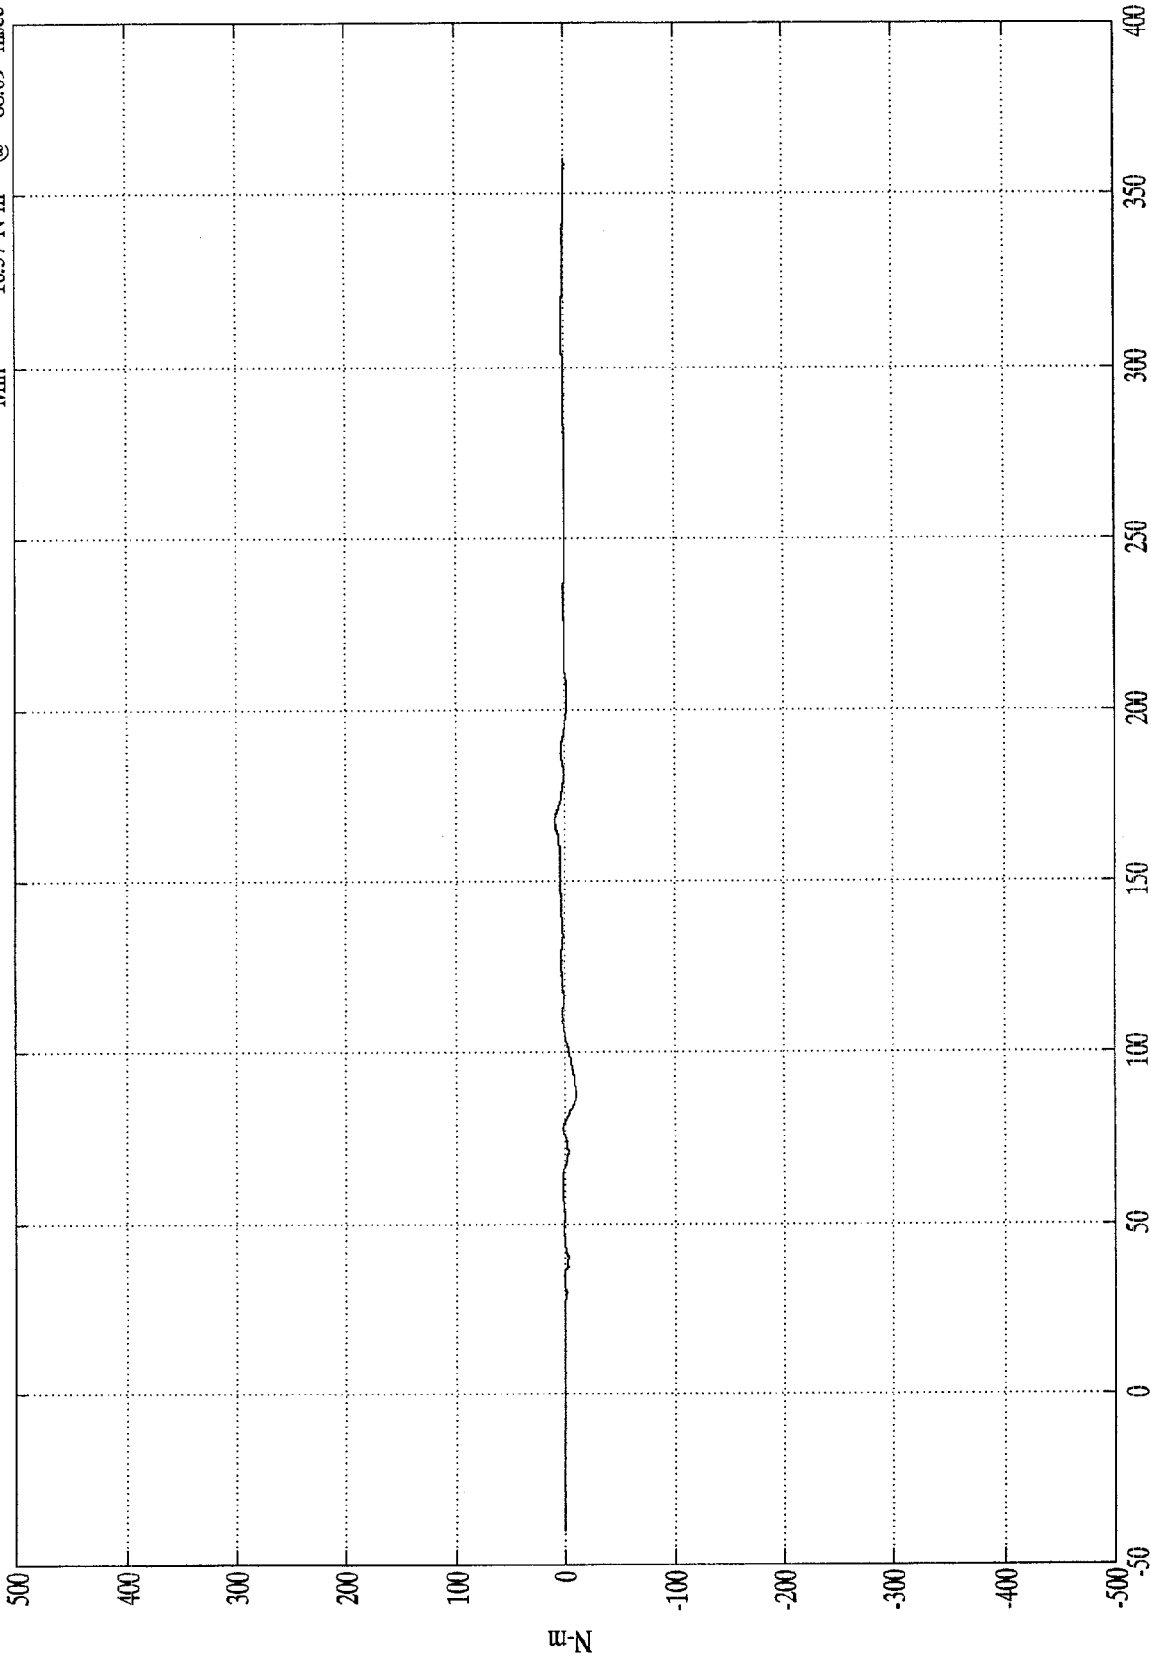

Time (msec)

SAE Filter Class 600

N-m


D-67

8404-5

VTV TEST Ford Escort/Olds Cutlass

P1 Upper Neck My

Max = 30.56 N-m @ 98.00 msec
Min = -15.78 N-m @ 201.29 msec

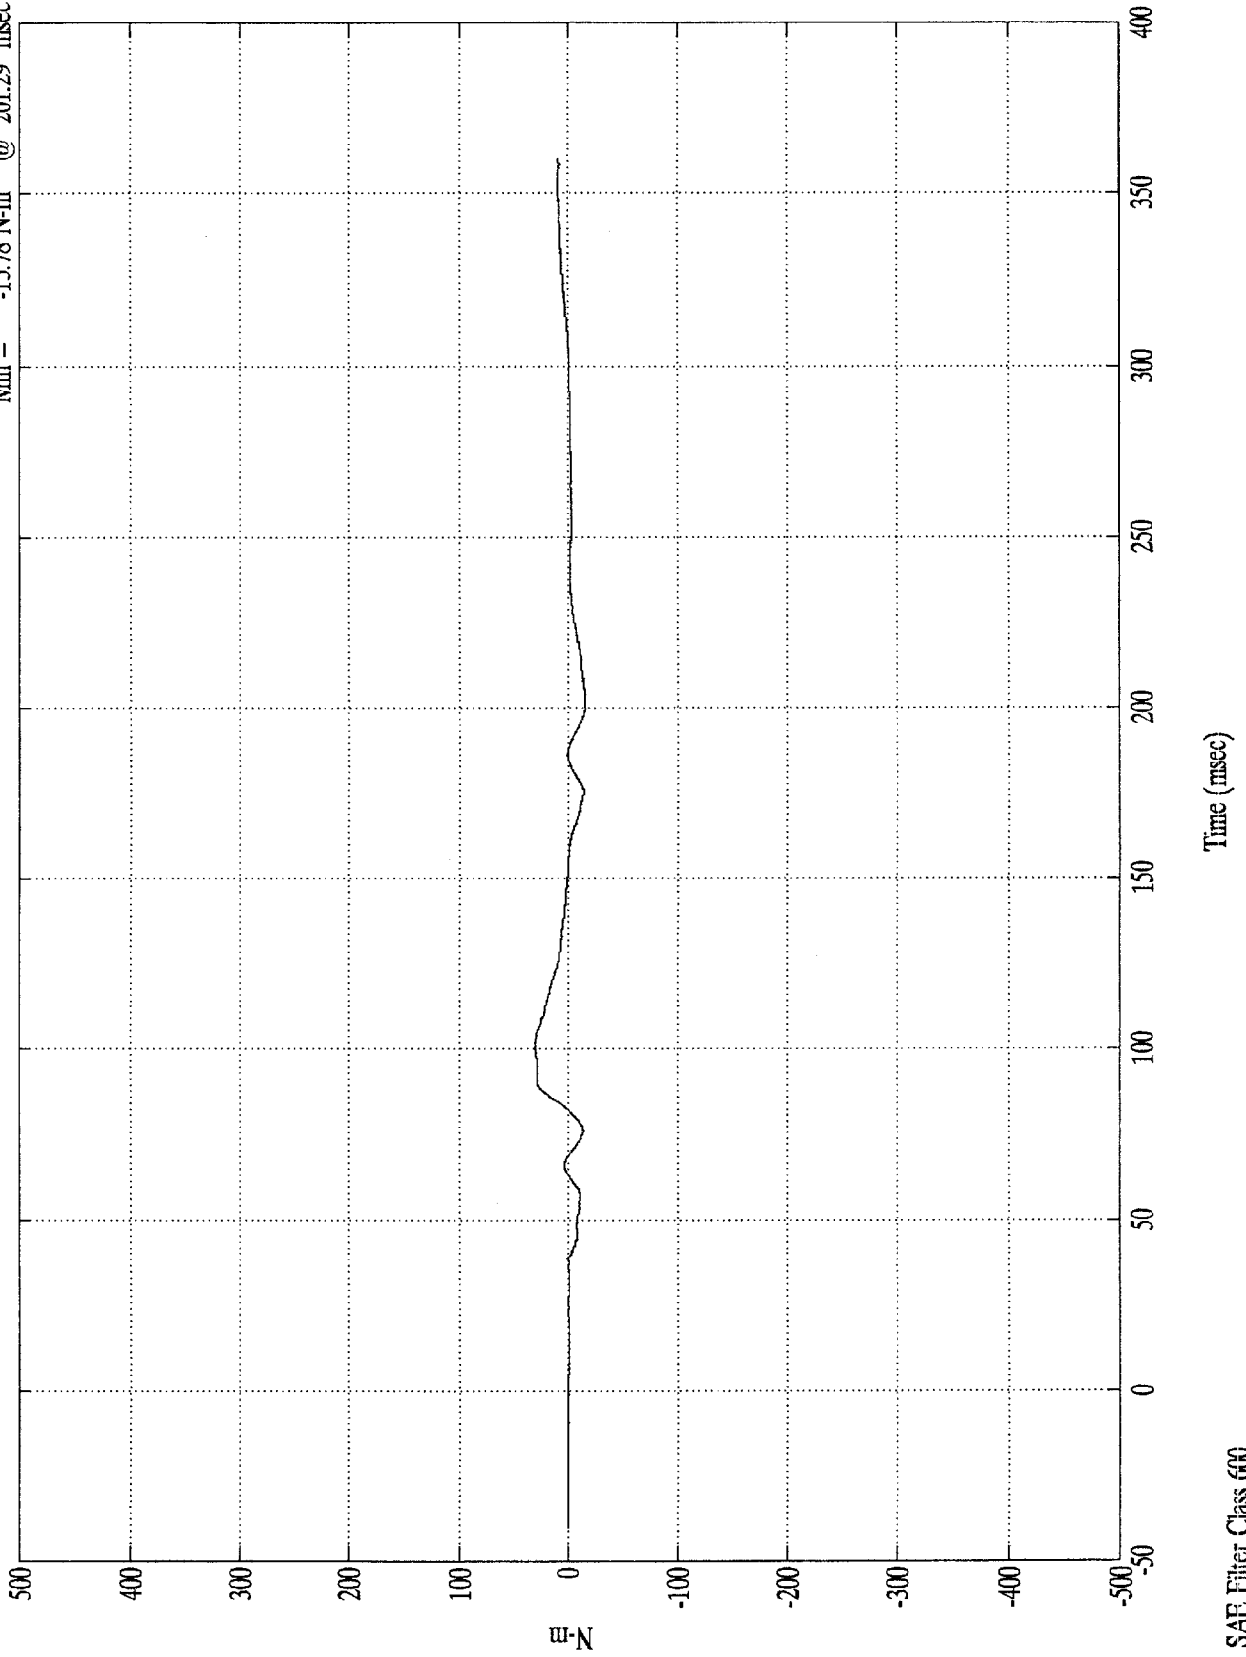

D-68


8404-5

SAE Filter Class 600

VTV TEST Ford Escort/Olds Cutlass

P1 Upper Neck Mz

Max = 5.31 N-m @ 233.79 msec
Min = -4.77 N-m @ 116.59 msec

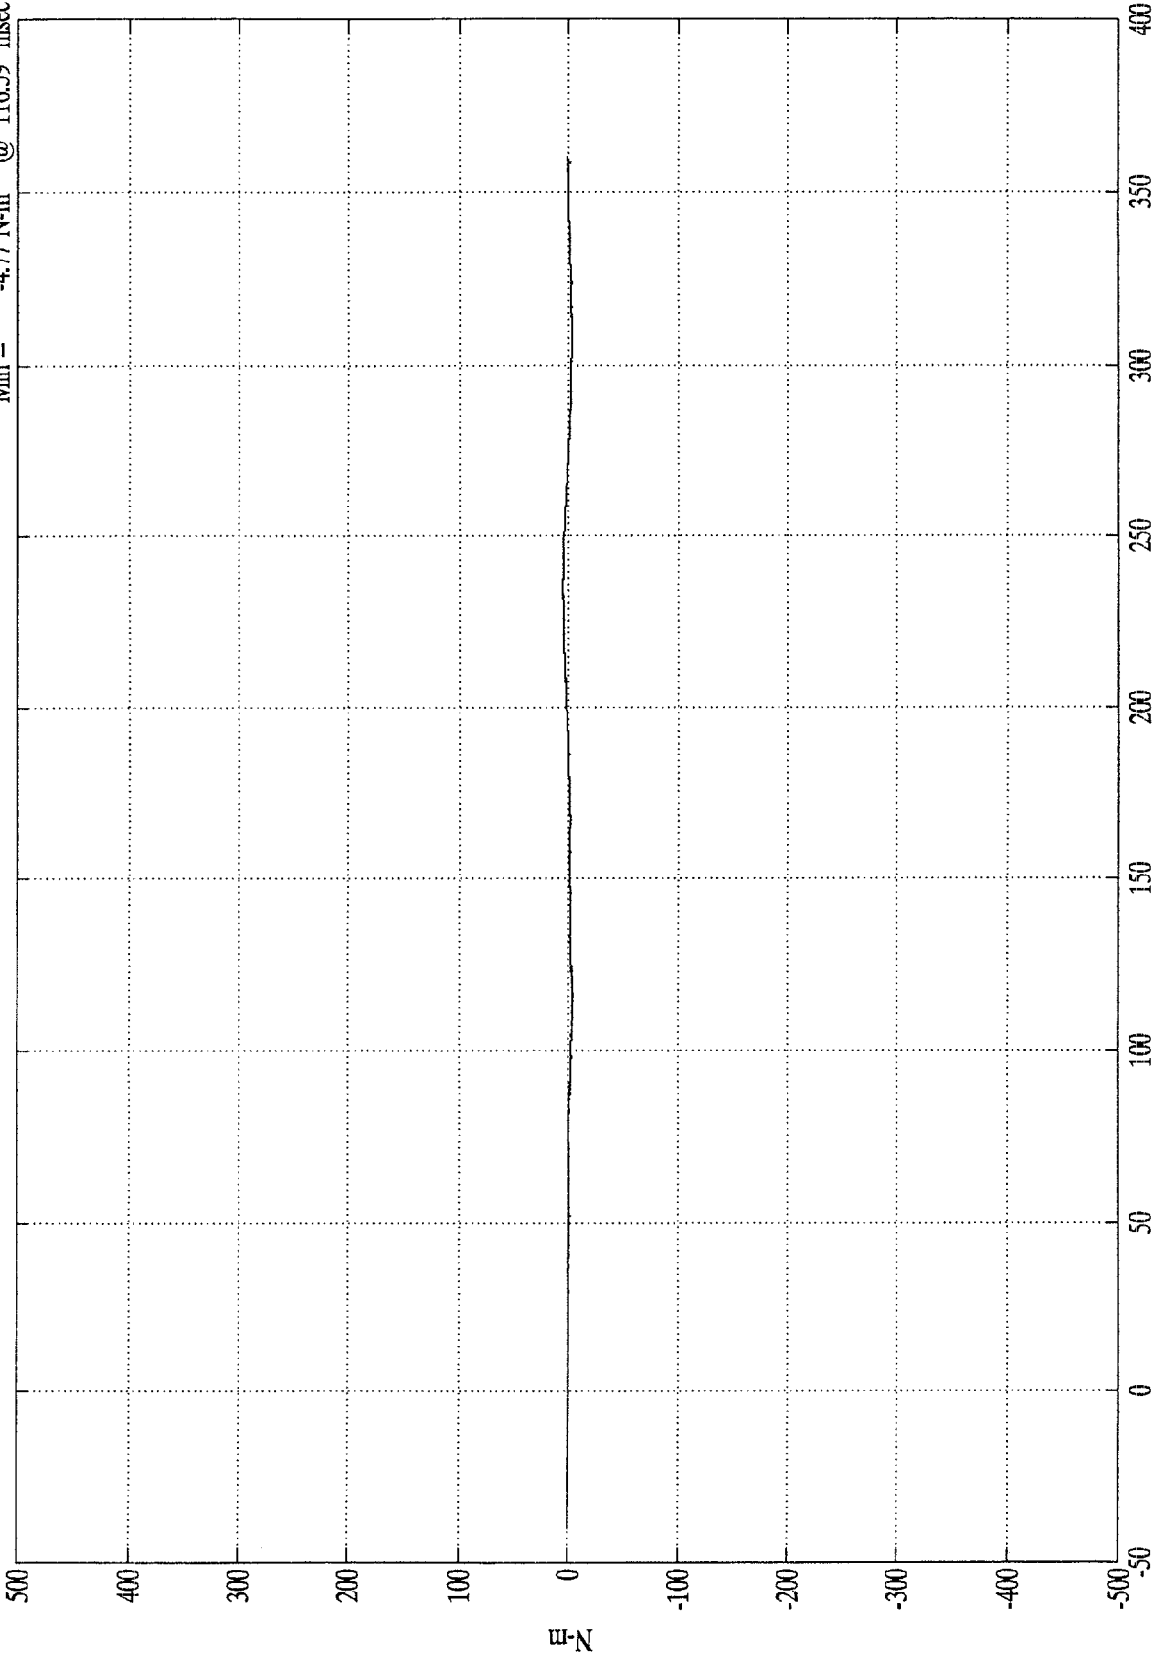

N-m


Time (msec)

SAE Filter Class 600

VTV TEST Ford Escort/Olds Cutlass

P1 Upper Neck Moment Res

Max = 31.19 N-m @ 98.09 msec
Min = .01 N-m @ -30.89 msec

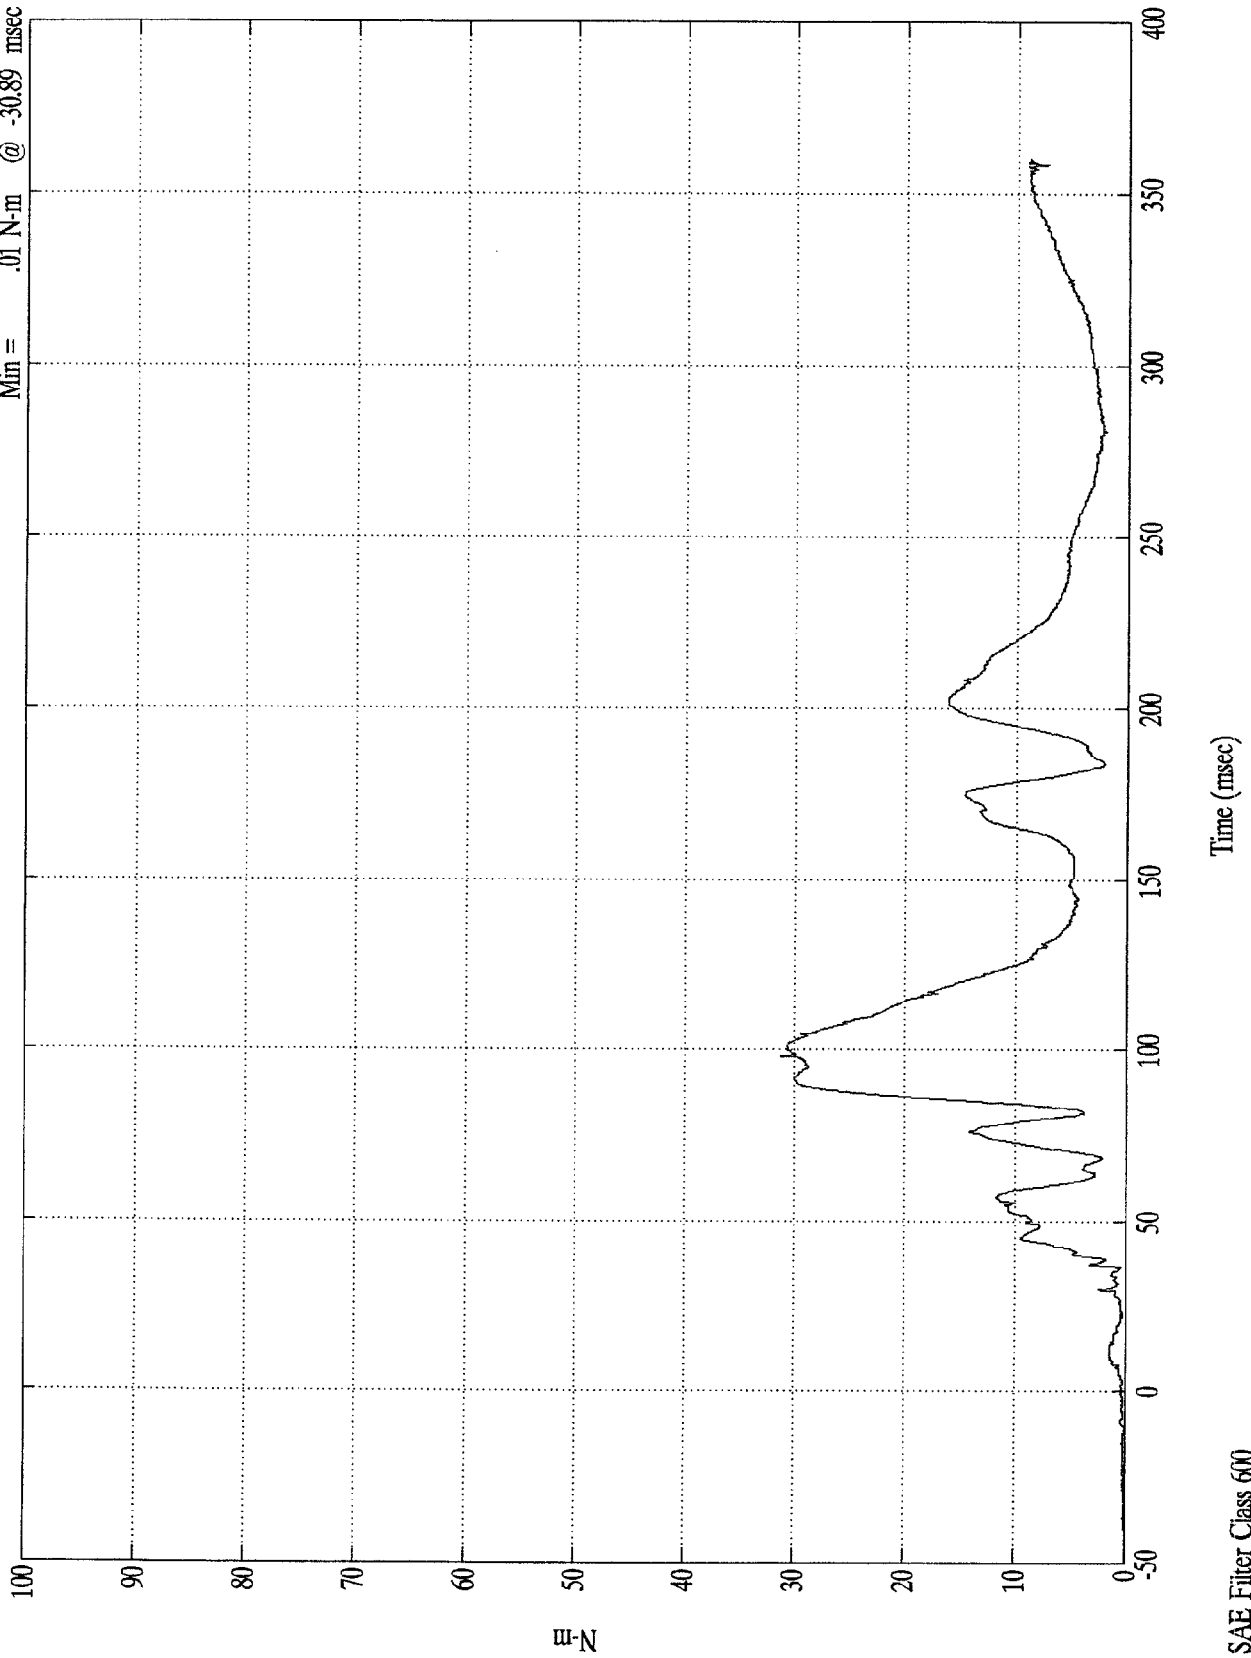


N-m

Time (msec)

VTV TEST Ford Escort/Olds Cutlass

P2 Head X


Max = 14.86 Gs @ 131.89 msec
Min = -55.50 Gs @ 47.00 msec

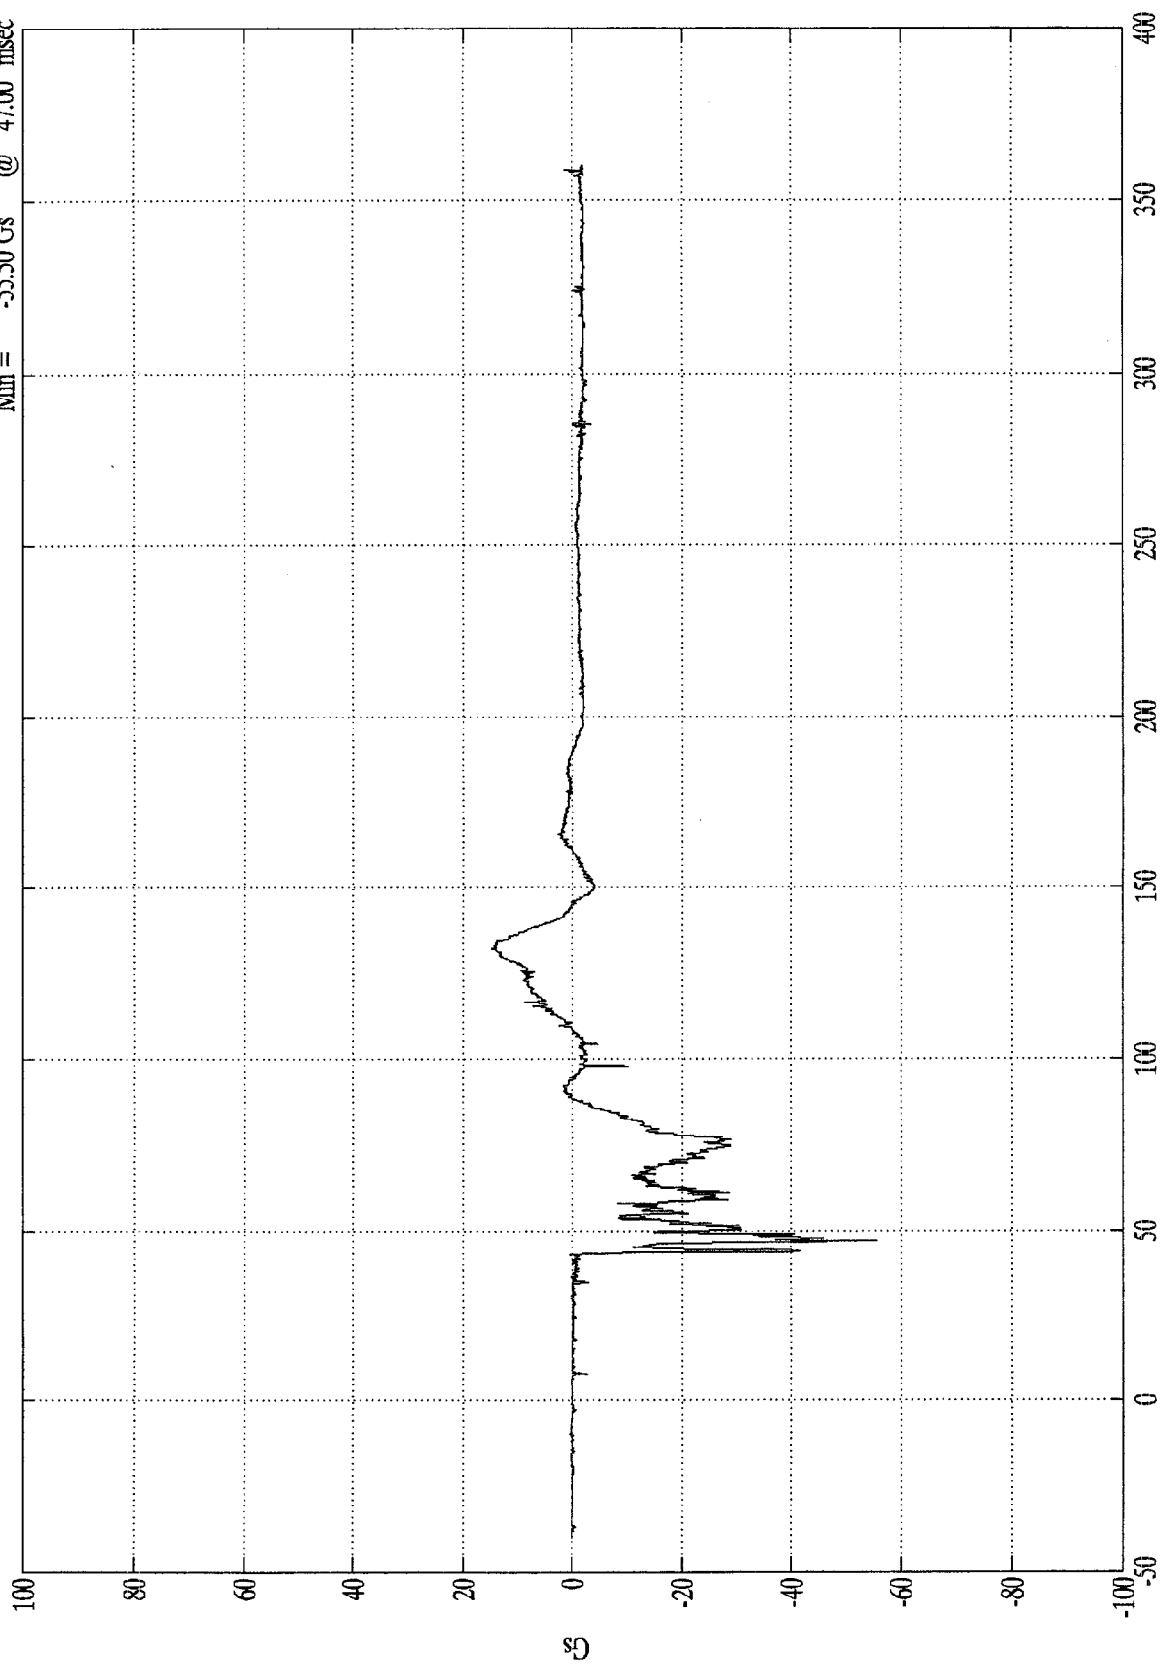

Time (msec)

SAE Filter Class 1000


VTV TEST Ford Escort/Olds Cutlass

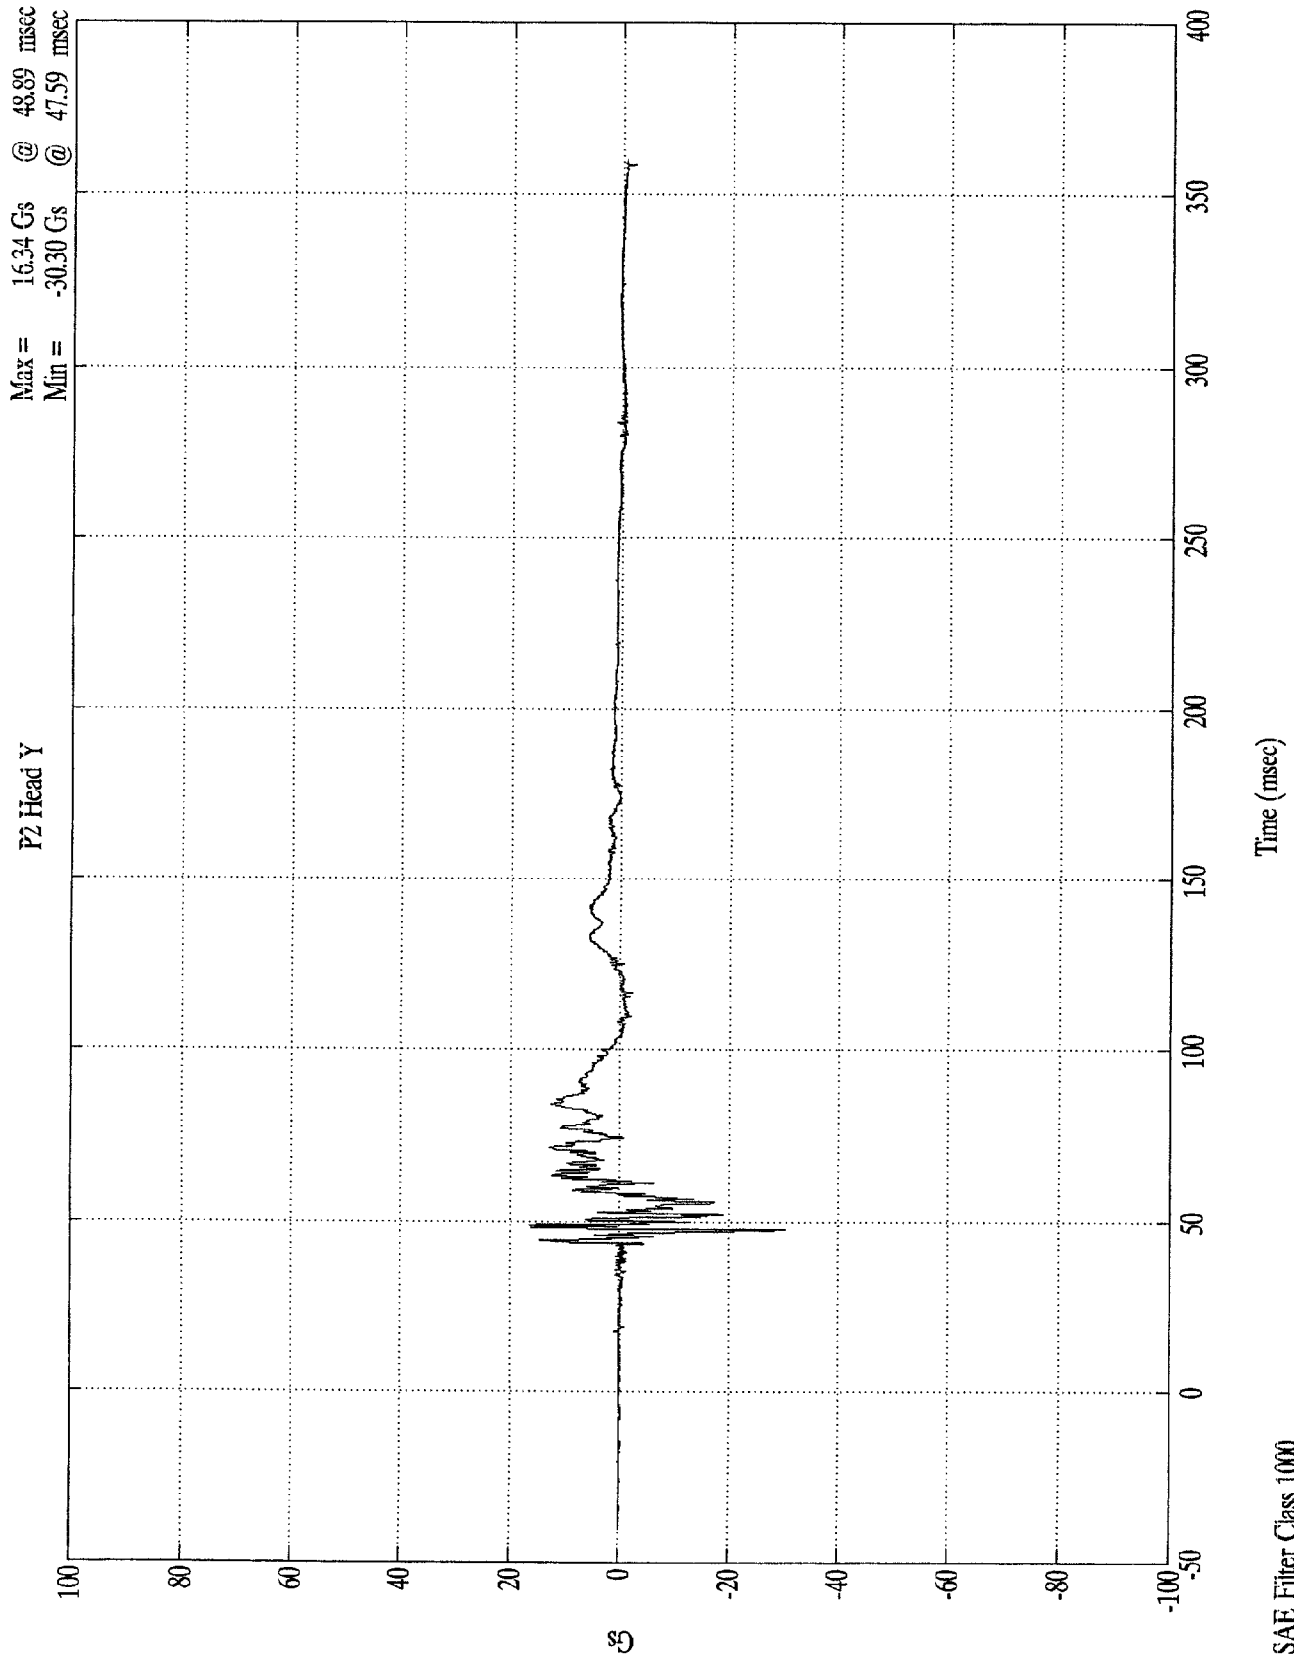

VTV TEST Ford Escort/Olds Cutlass

Max = 19.84 Gs @ 59.89 msec
Min = -16.54 Gs @ 49.70 msec

P2 Head Z

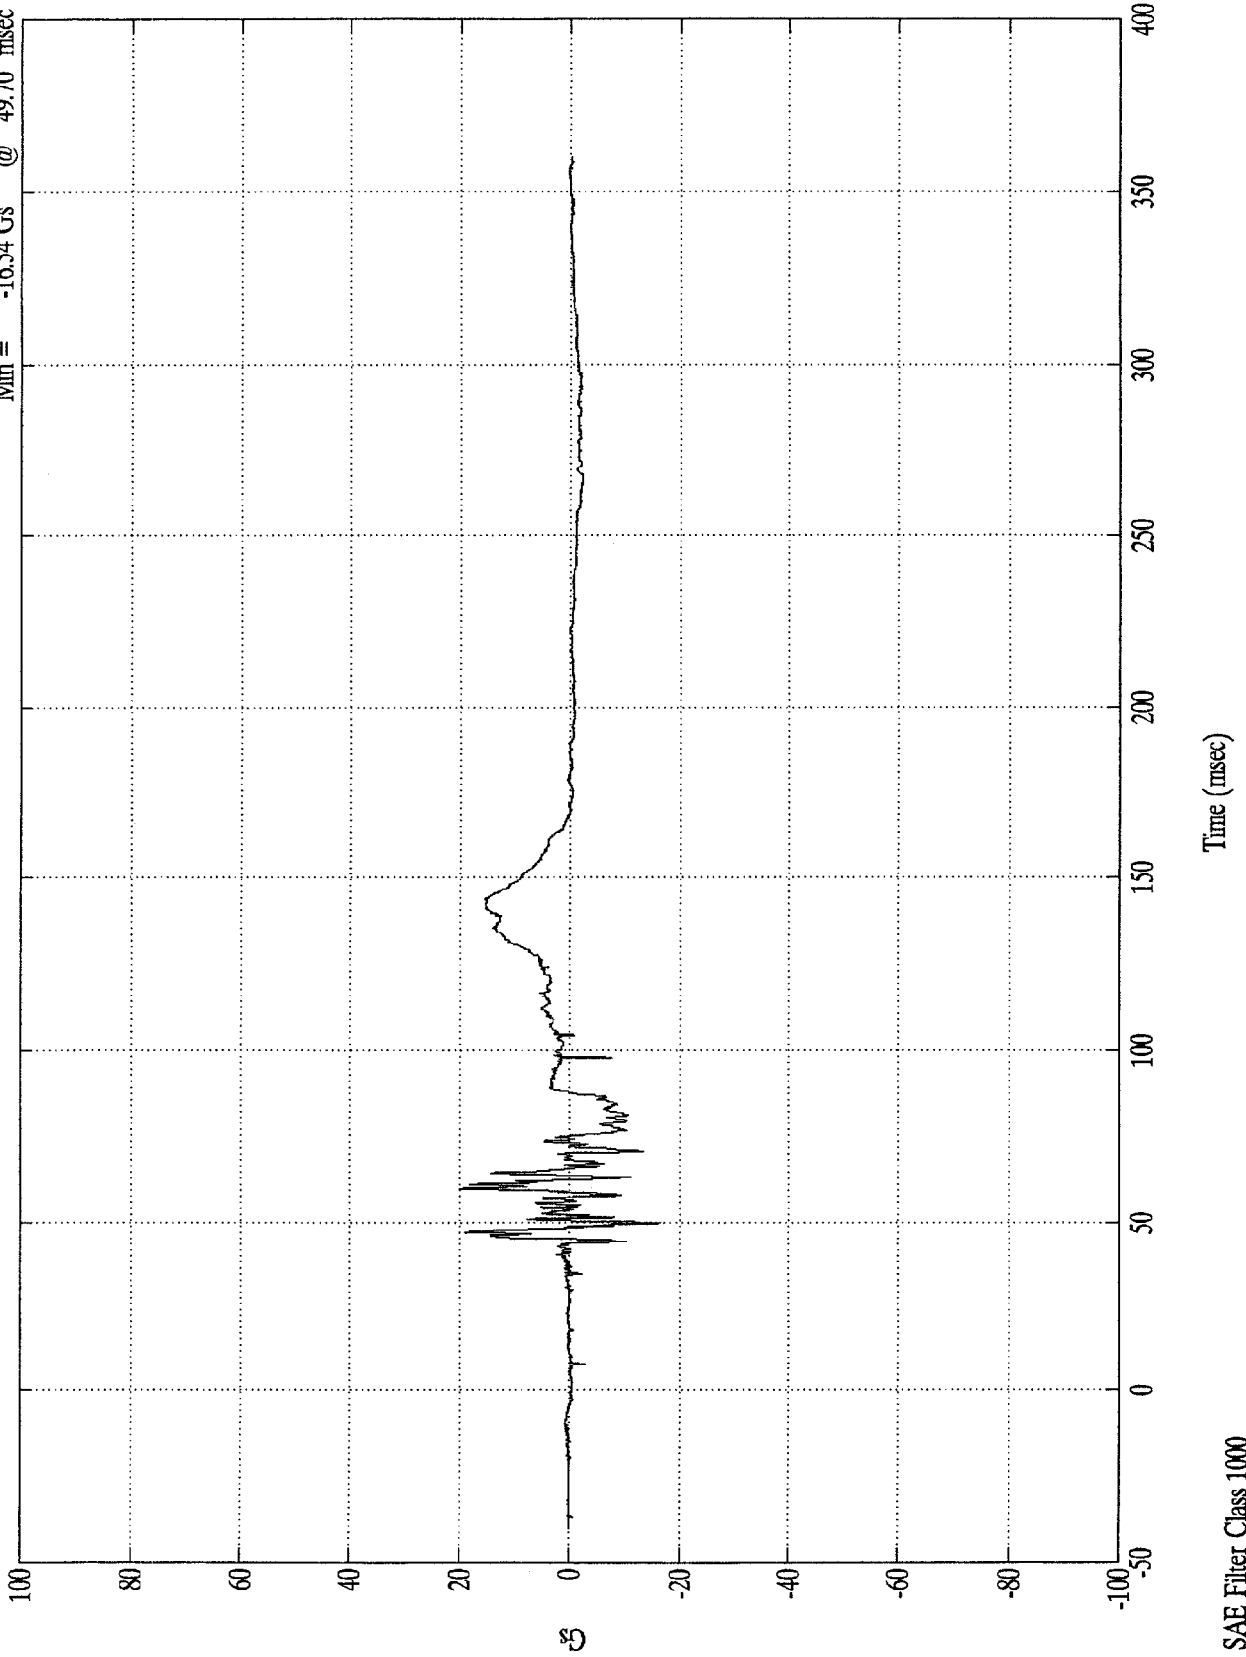


D-73

8404-5

SAE Filter Class 1000


VTV TEST Ford Escort/Olds Cutlass

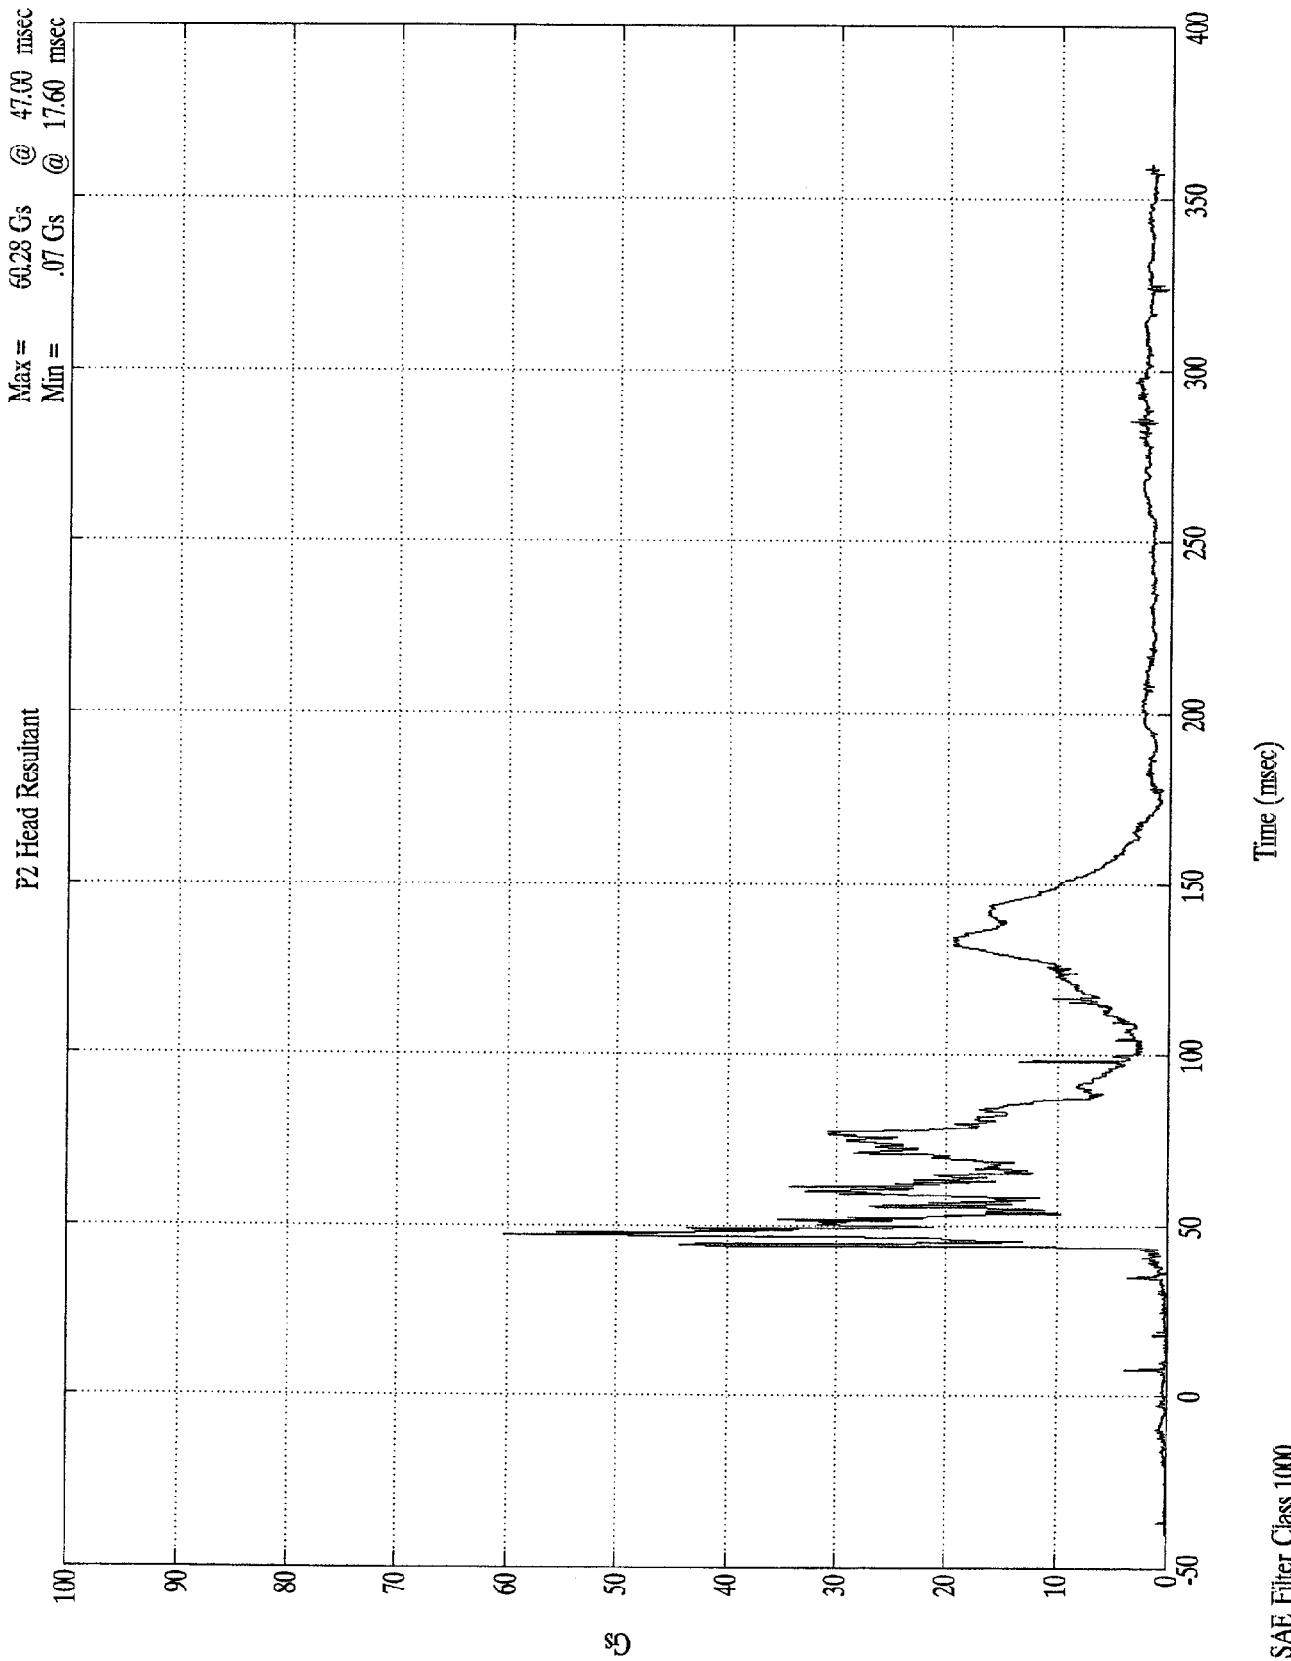

VTV TEST Ford Escort/Olds Cutlass

P2 Chest X

Max = 12.03 Gs @ 129.79 msec
Min = -24.59 Gs @ 85.90 msec

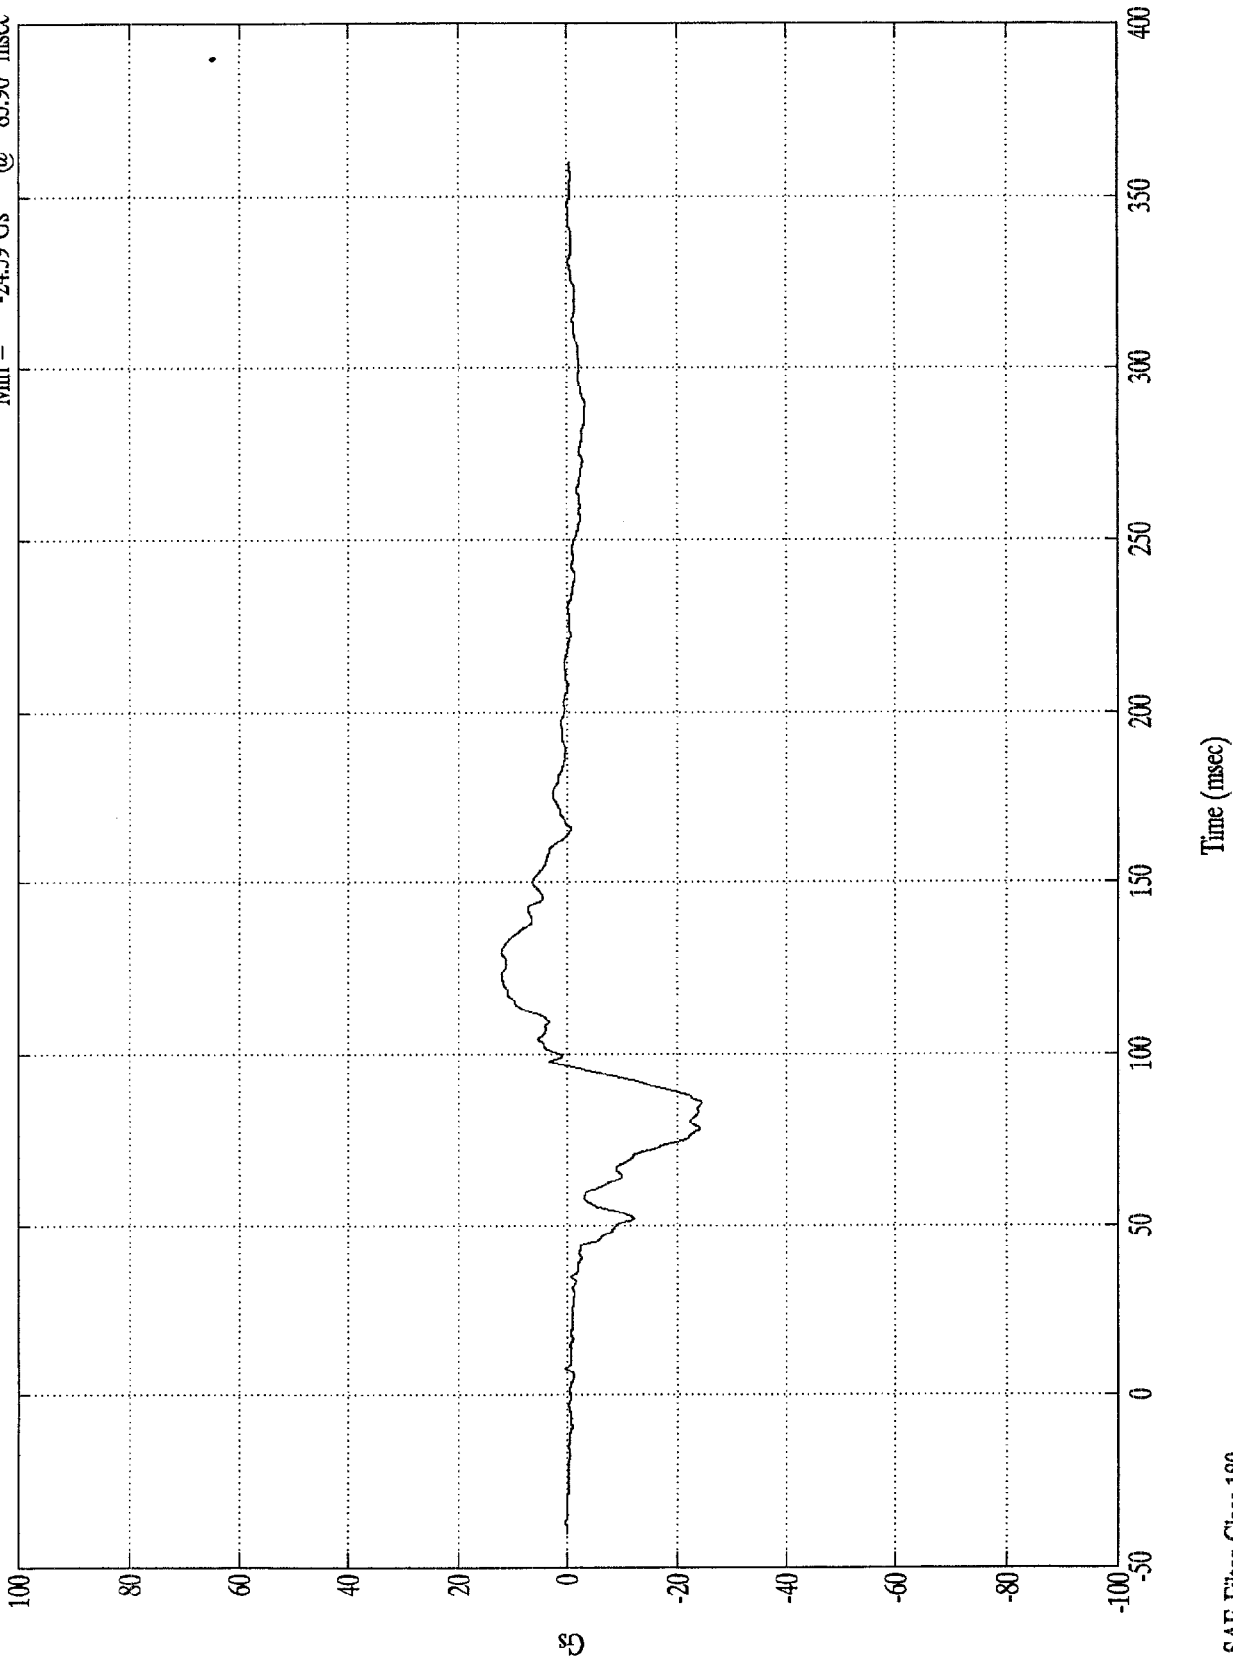


D-75

8404-5

SAE Filter Class 180

VTV TEST Ford Escort/Olds Cutlass

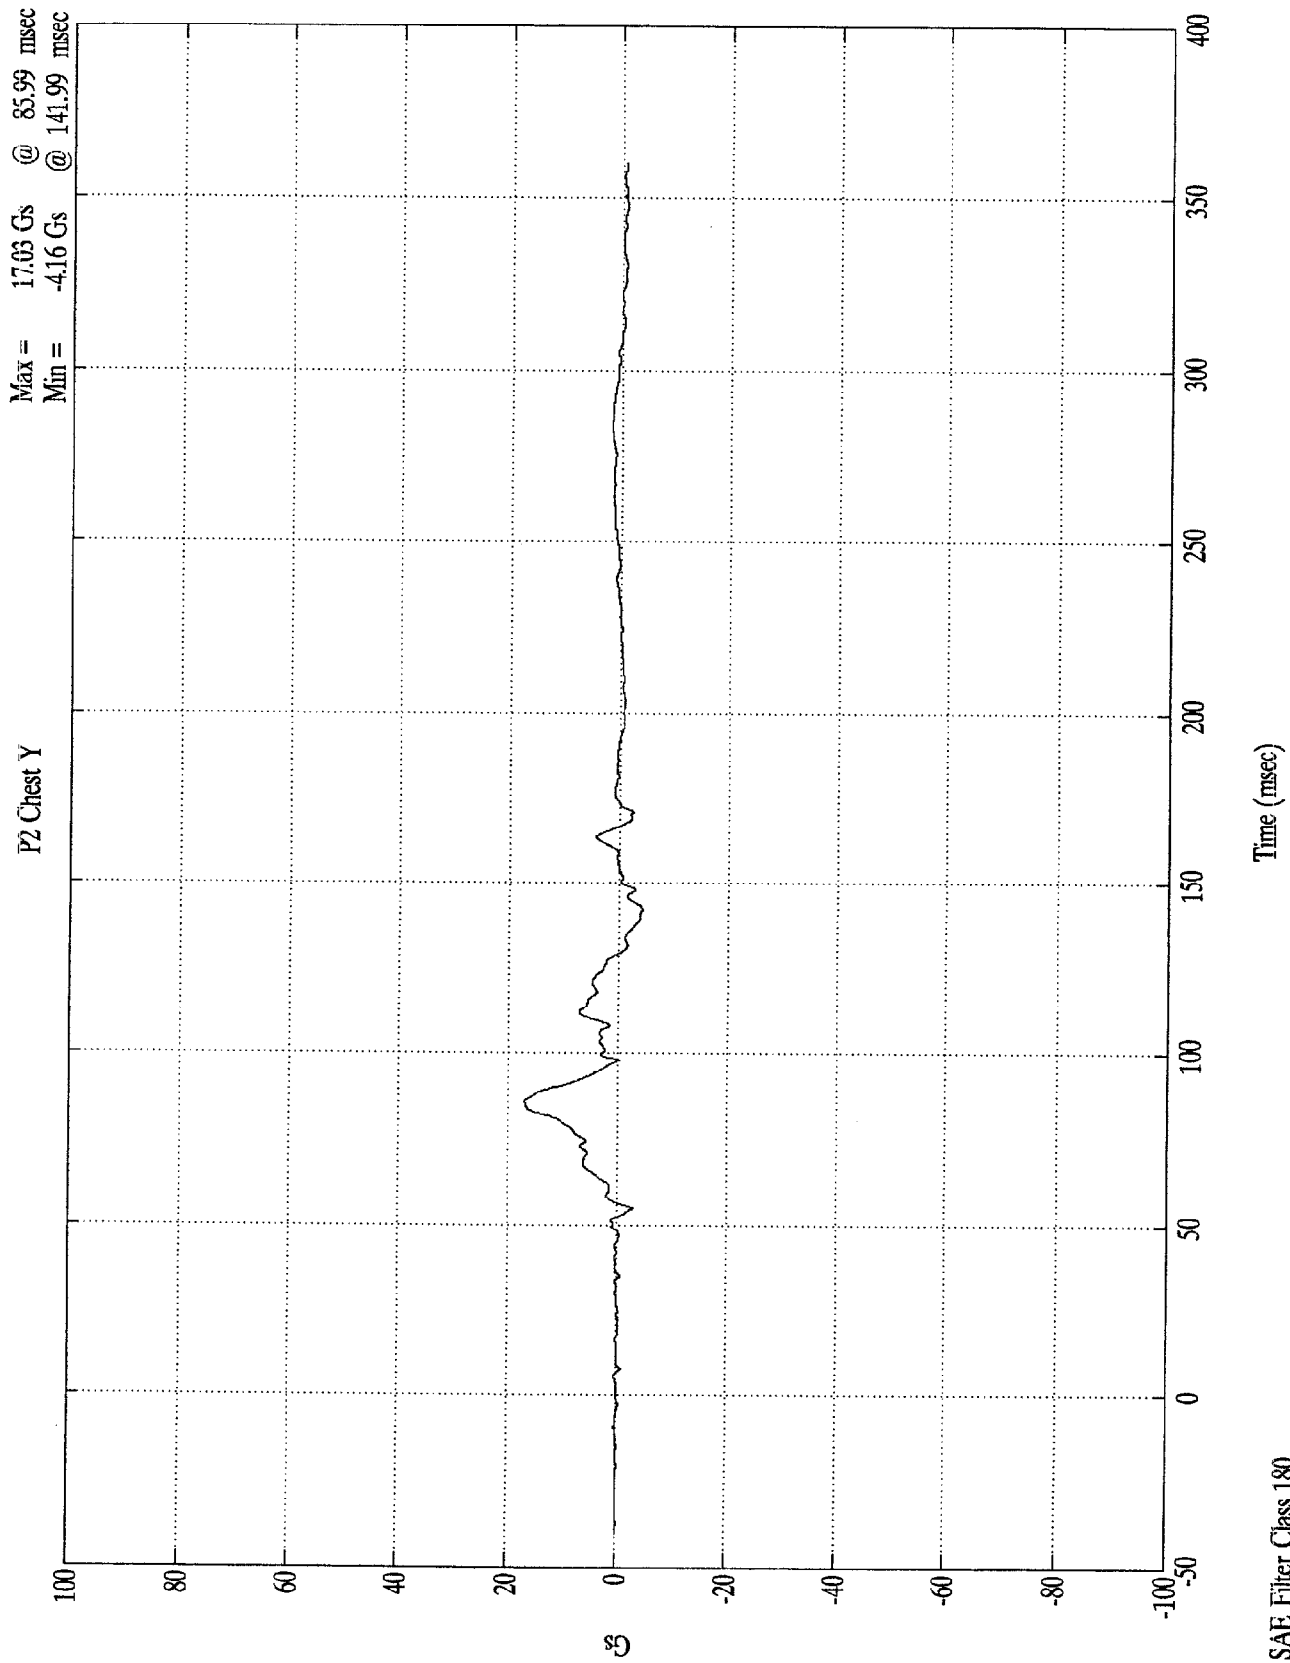

D-76


8404-5

SAE Filter Class 180

VTV TEST Ford Escort/Olds Cutlass


Max = 12.36 Gs @ 62.19 msec
Min = -6.94 Gs @ 50.59 msec

P2 Chest Z

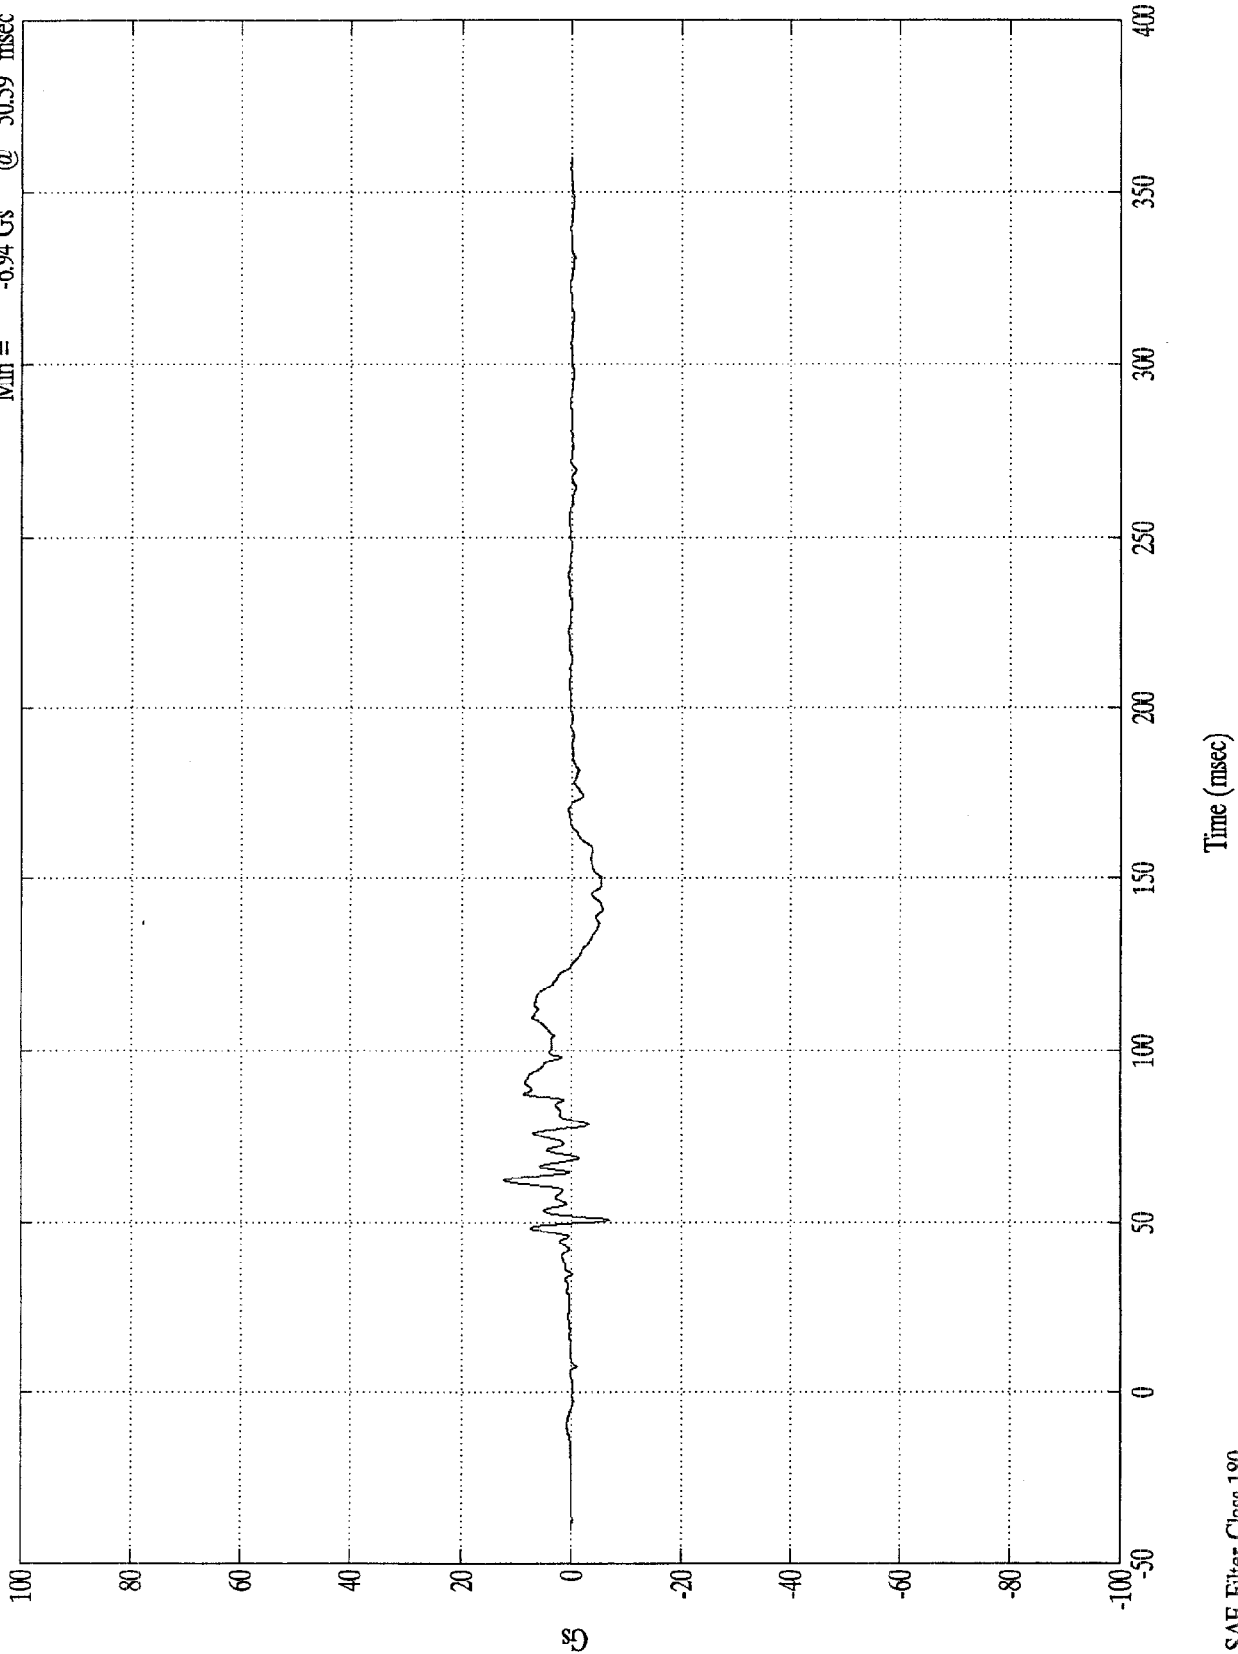

SAE Filter Class 180


VTV TEST Ford Escort/Olds Cutlass

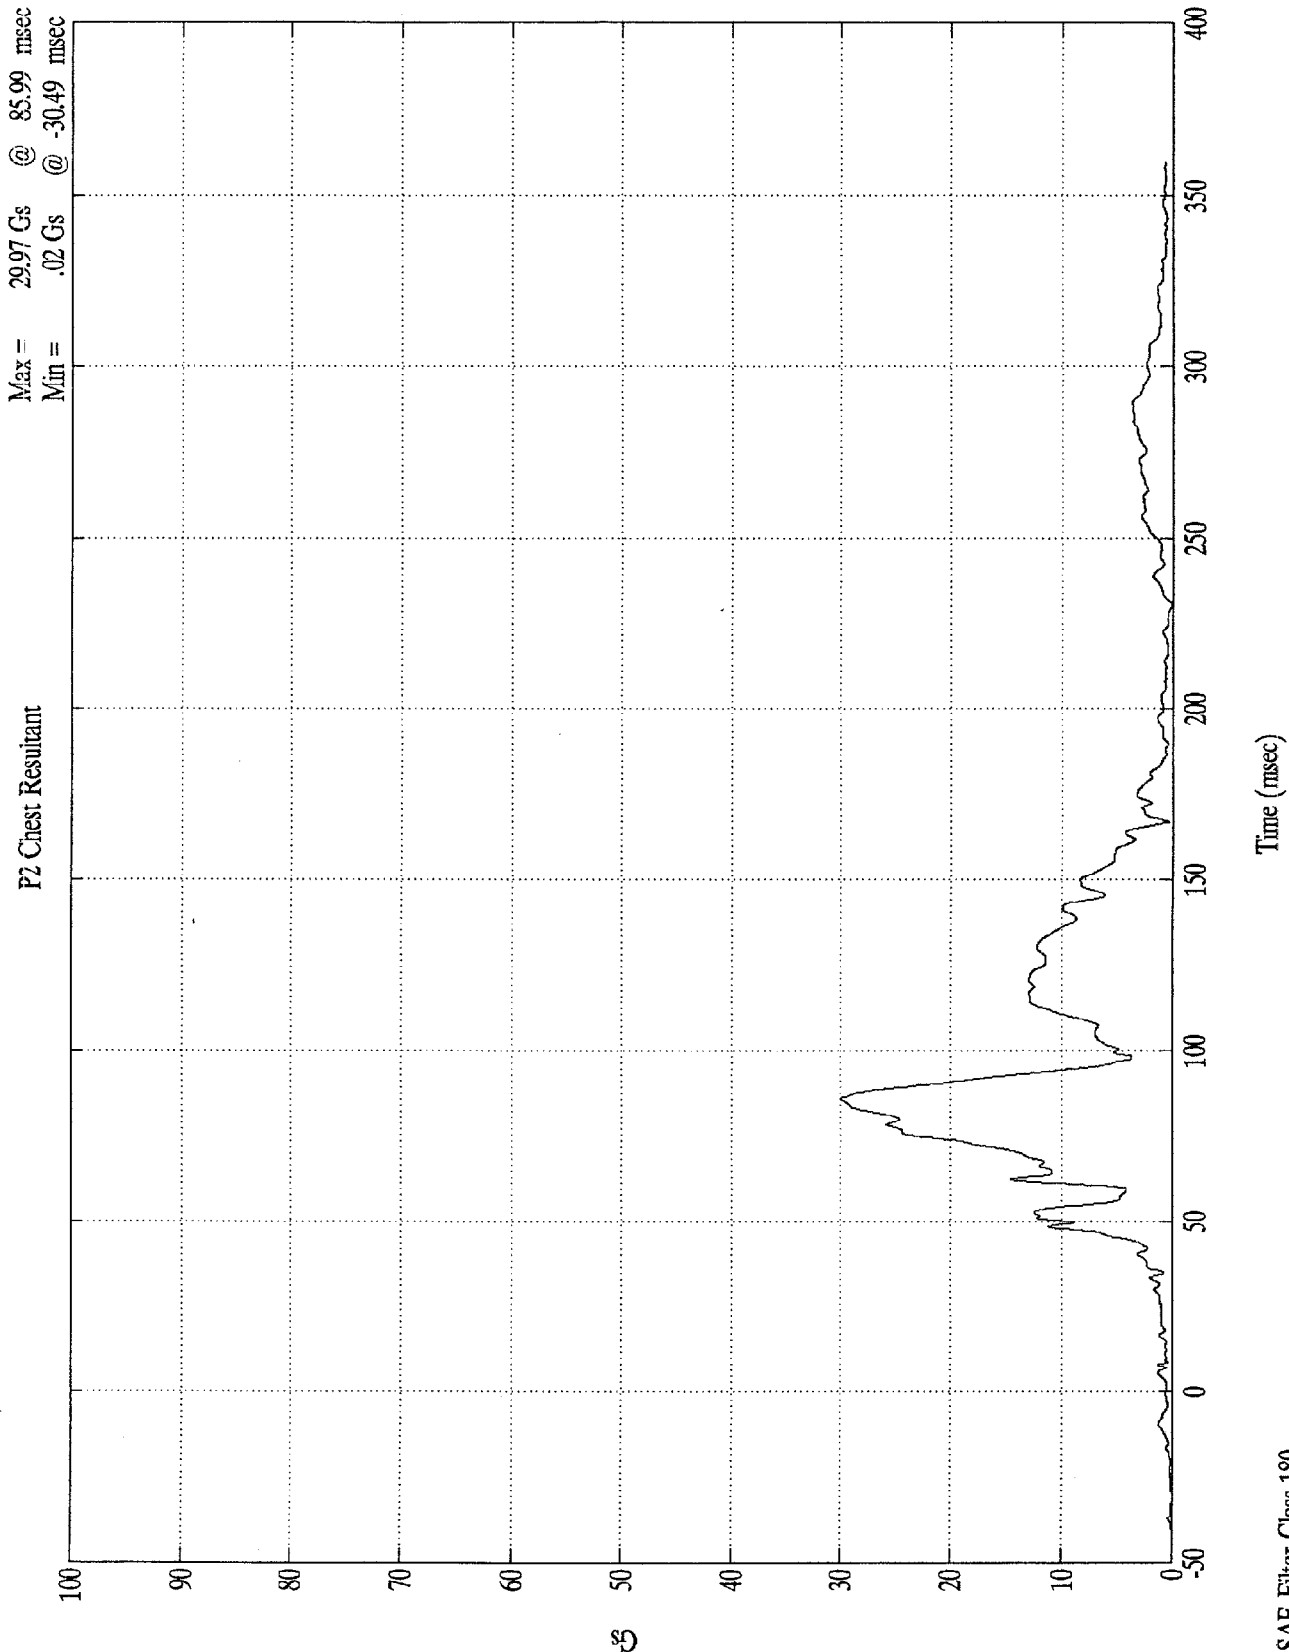

VTV TEST Ford Escort/Olds Cutlass

P2 Chest Displacement

Max = 1.95 mm @ 88.69 msec
Min = -3.11 mm @ 55.09 msec

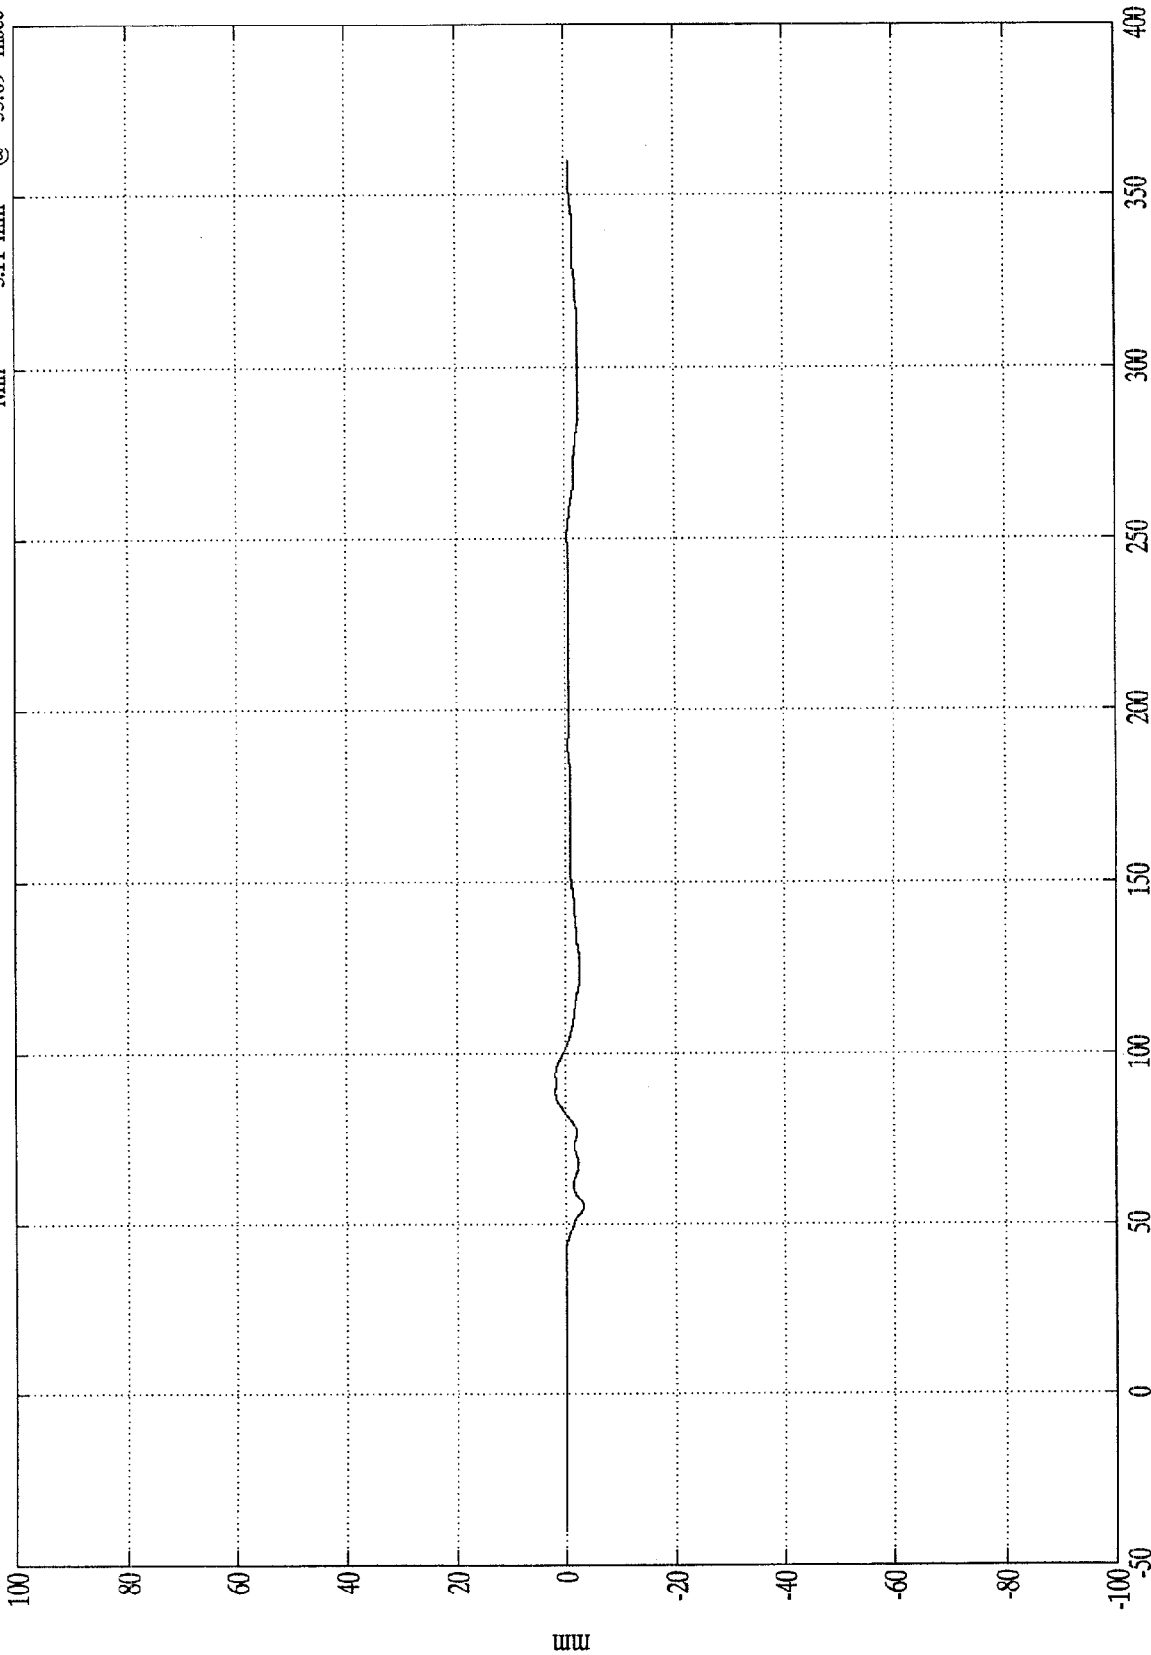

Time (msec)

SAE Filter Class 60

mm

D-79


8404-5

VTV TEST Ford Escort/Olds Cutlass

Max = 438.45 Nwt @ 147.00 msec
Min = -301.07 Nwt @ 44.09 msec

P2 Upper Neck Fx

$\times 10^4$

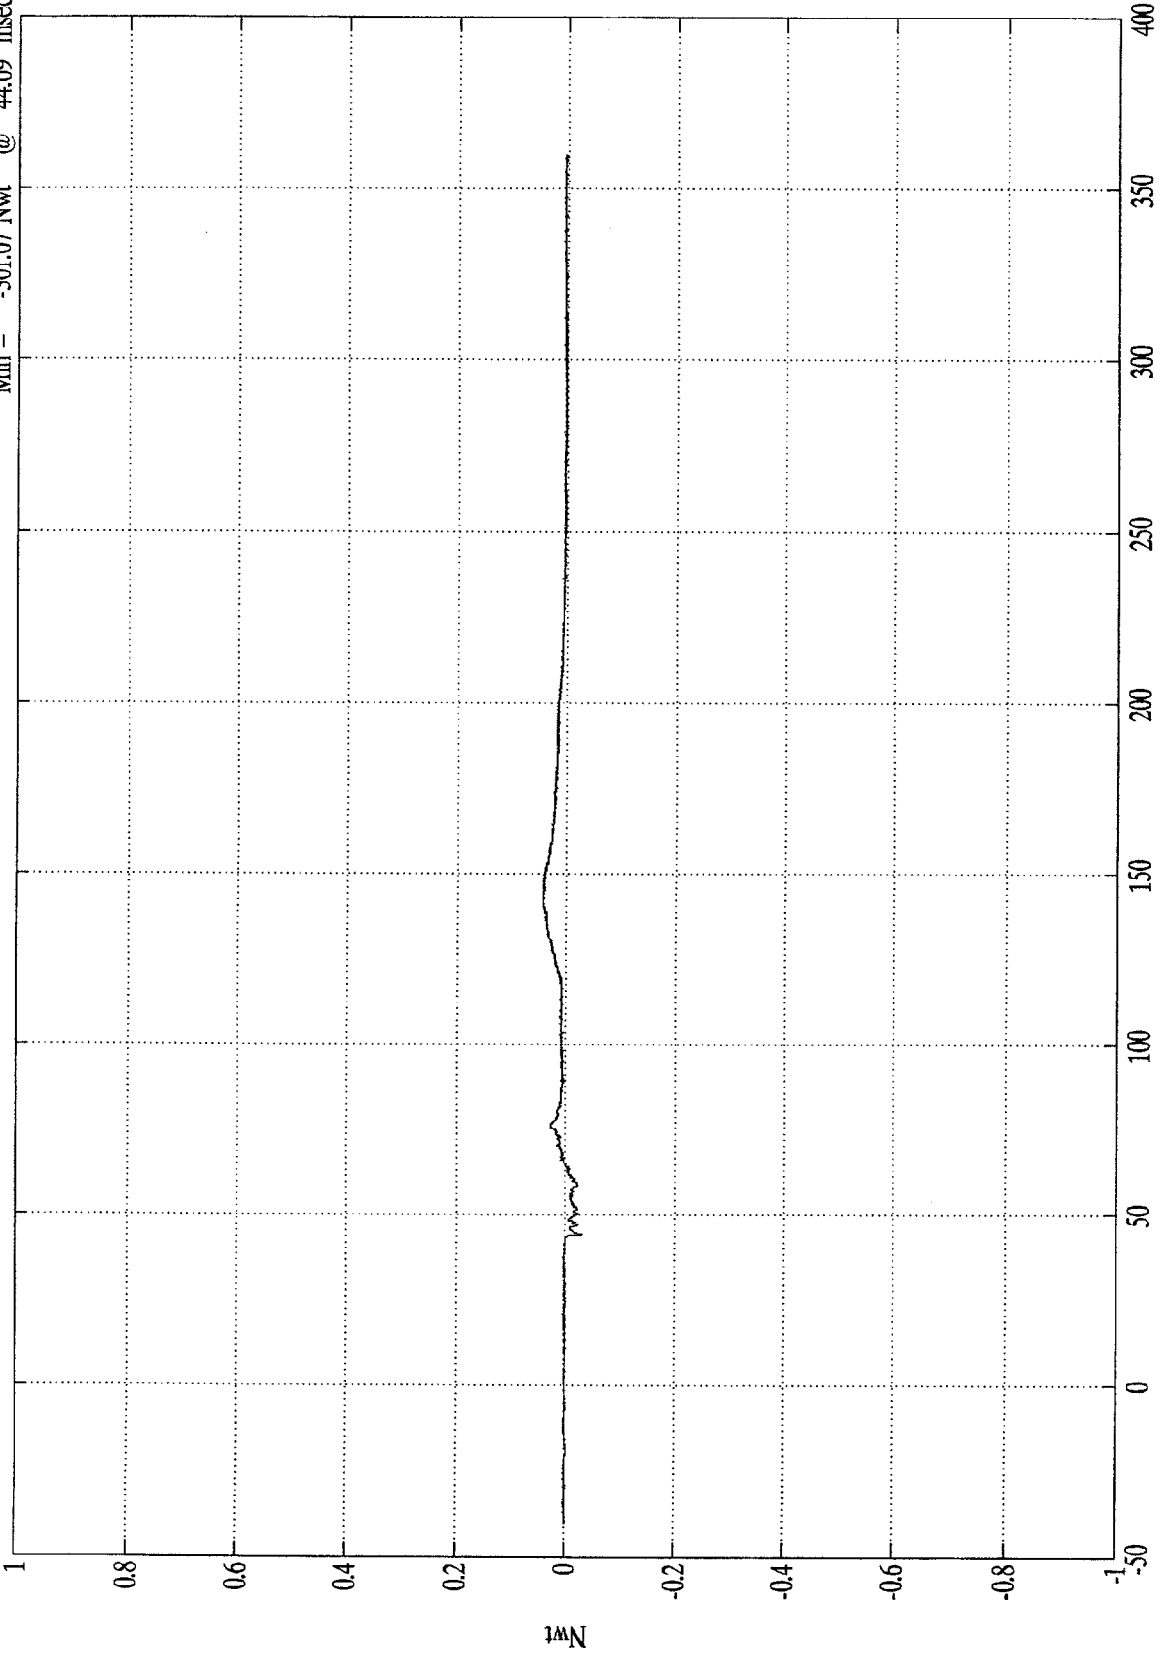

1Nwt

D-80


Time (msec)

SAE Filter Class 1000

8404-5

VTV TEST Ford Escort/Olds Cutlass

P2 Upper Neck Fy
Max = 122.10 Nwt @ 113.19 msec
Min = -205.76 Nwt @ 74.29 msec

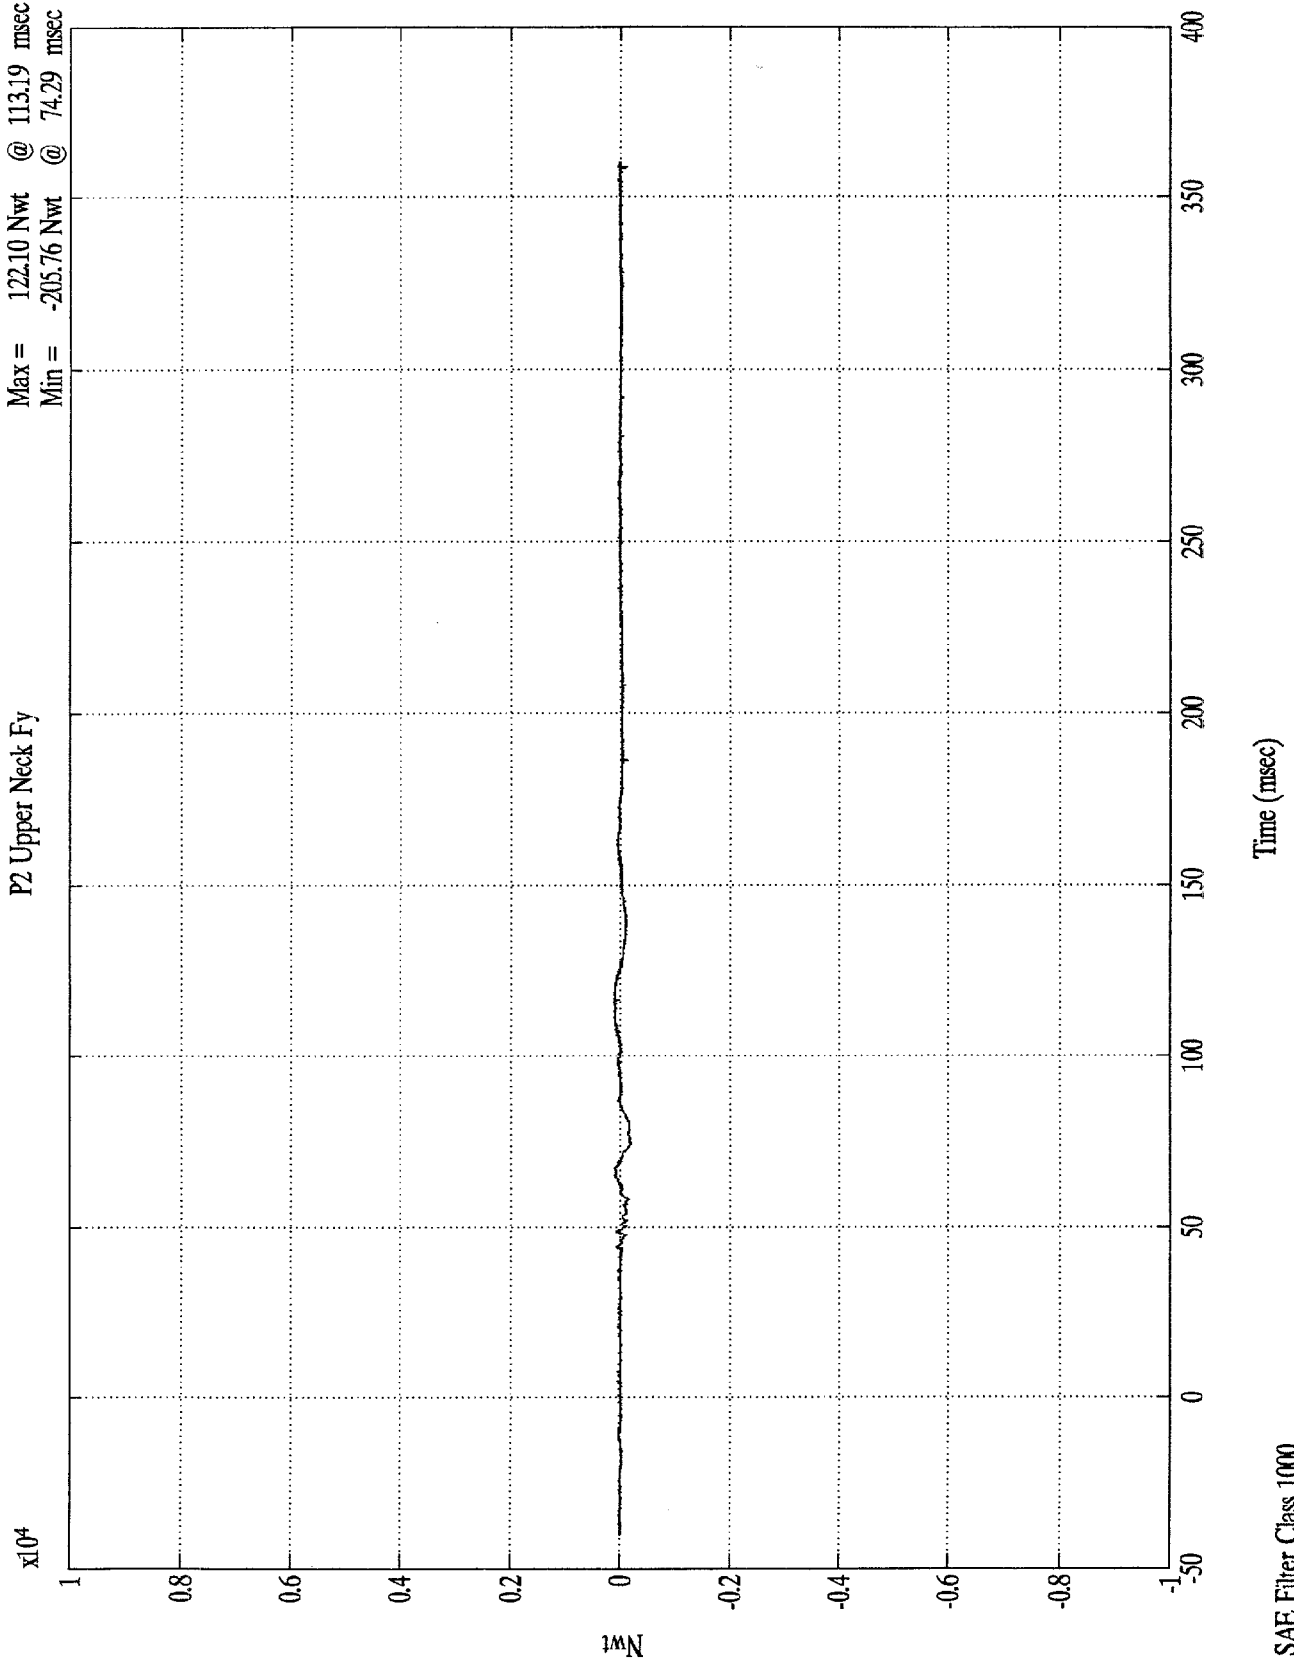


D-81

8404-5

SAE Filter Class 1000

VTV TEST Ford Escort/Olds Cutlass

P2 Upper Neck Fz
Max = 878.90 Nwt @ 62.19 msec
Min = -939.48 Nwt @ 358.39 msec

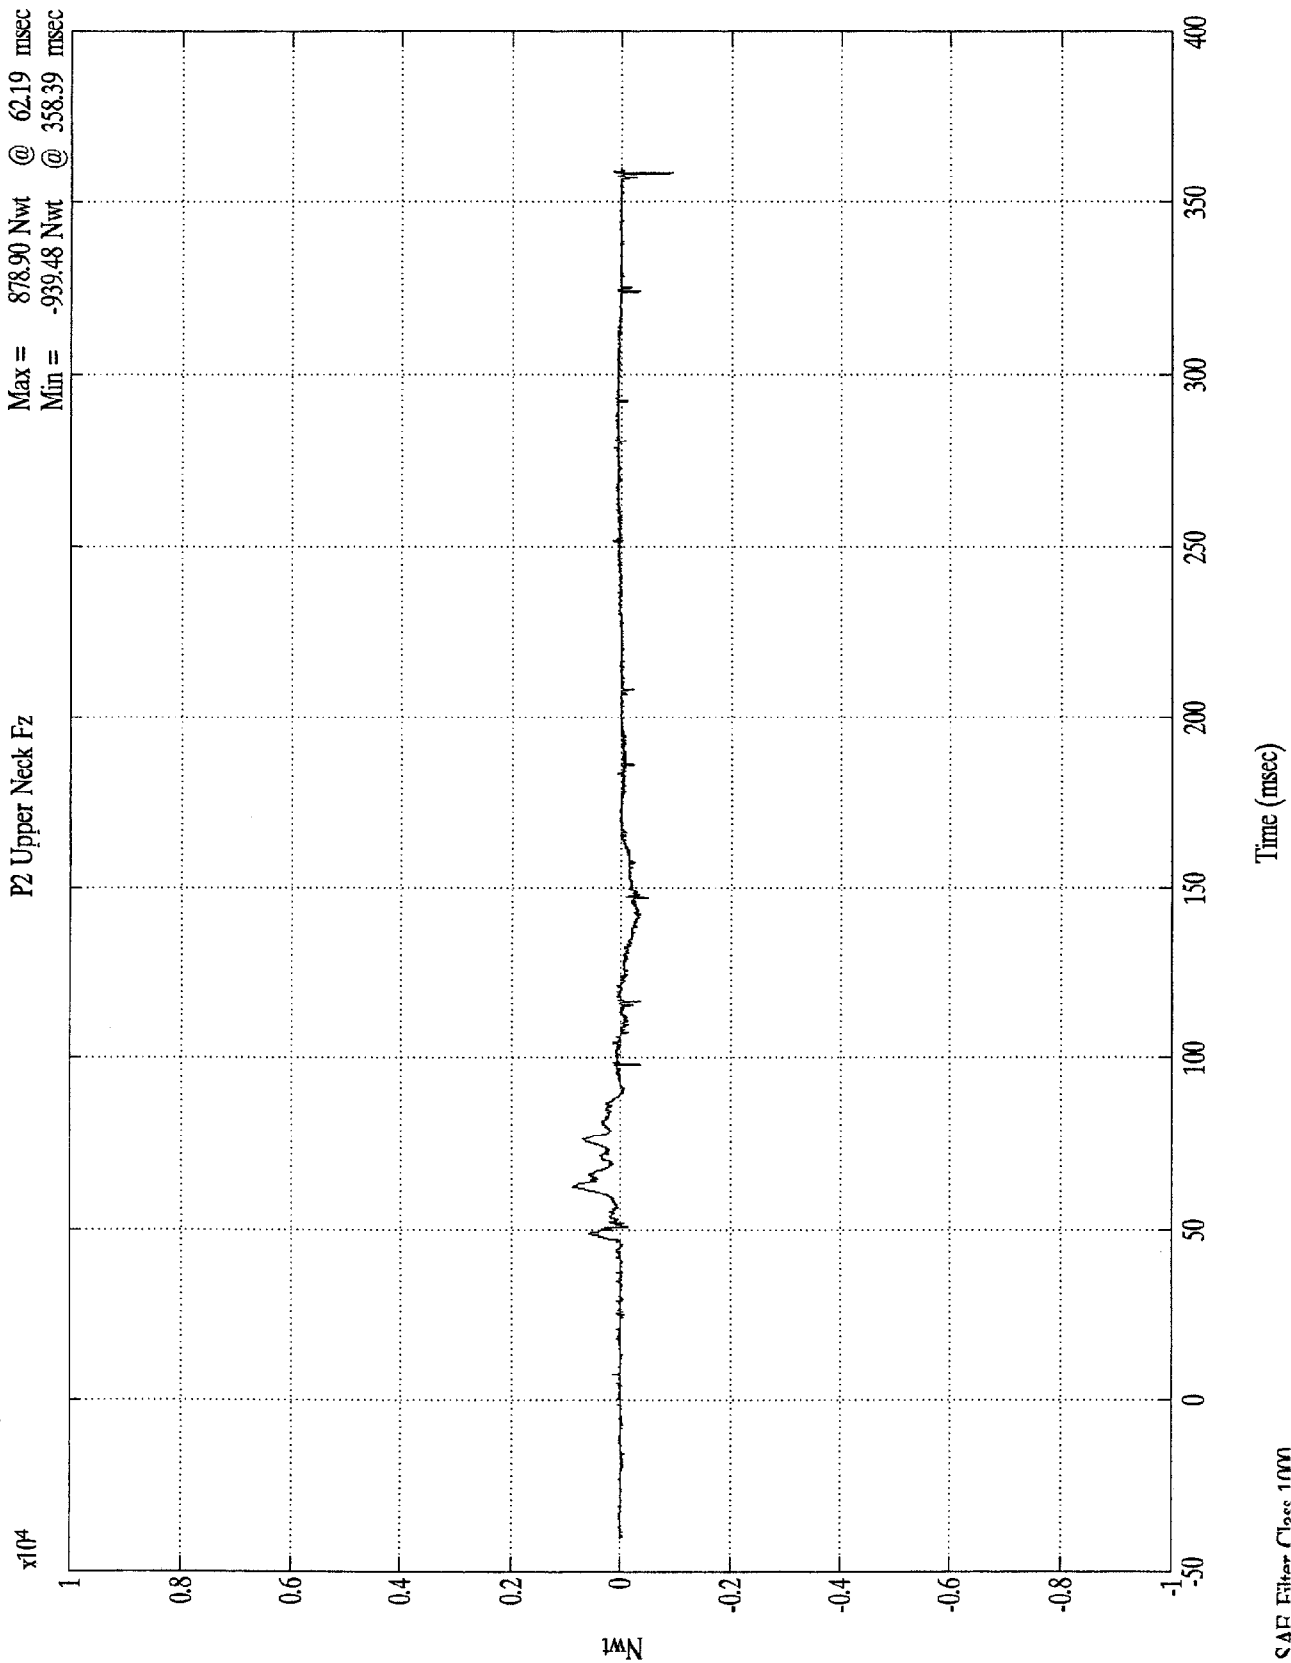

D-82


8404-5

SAE Filter Class 1000

VTV TEST Ford Escort/Olds Cutlass

P2 Upper Neck Force Res

Max = 945.76 Nwt @ 358.39 msec
Min = 7.04 Nwt @ 41.09 msec

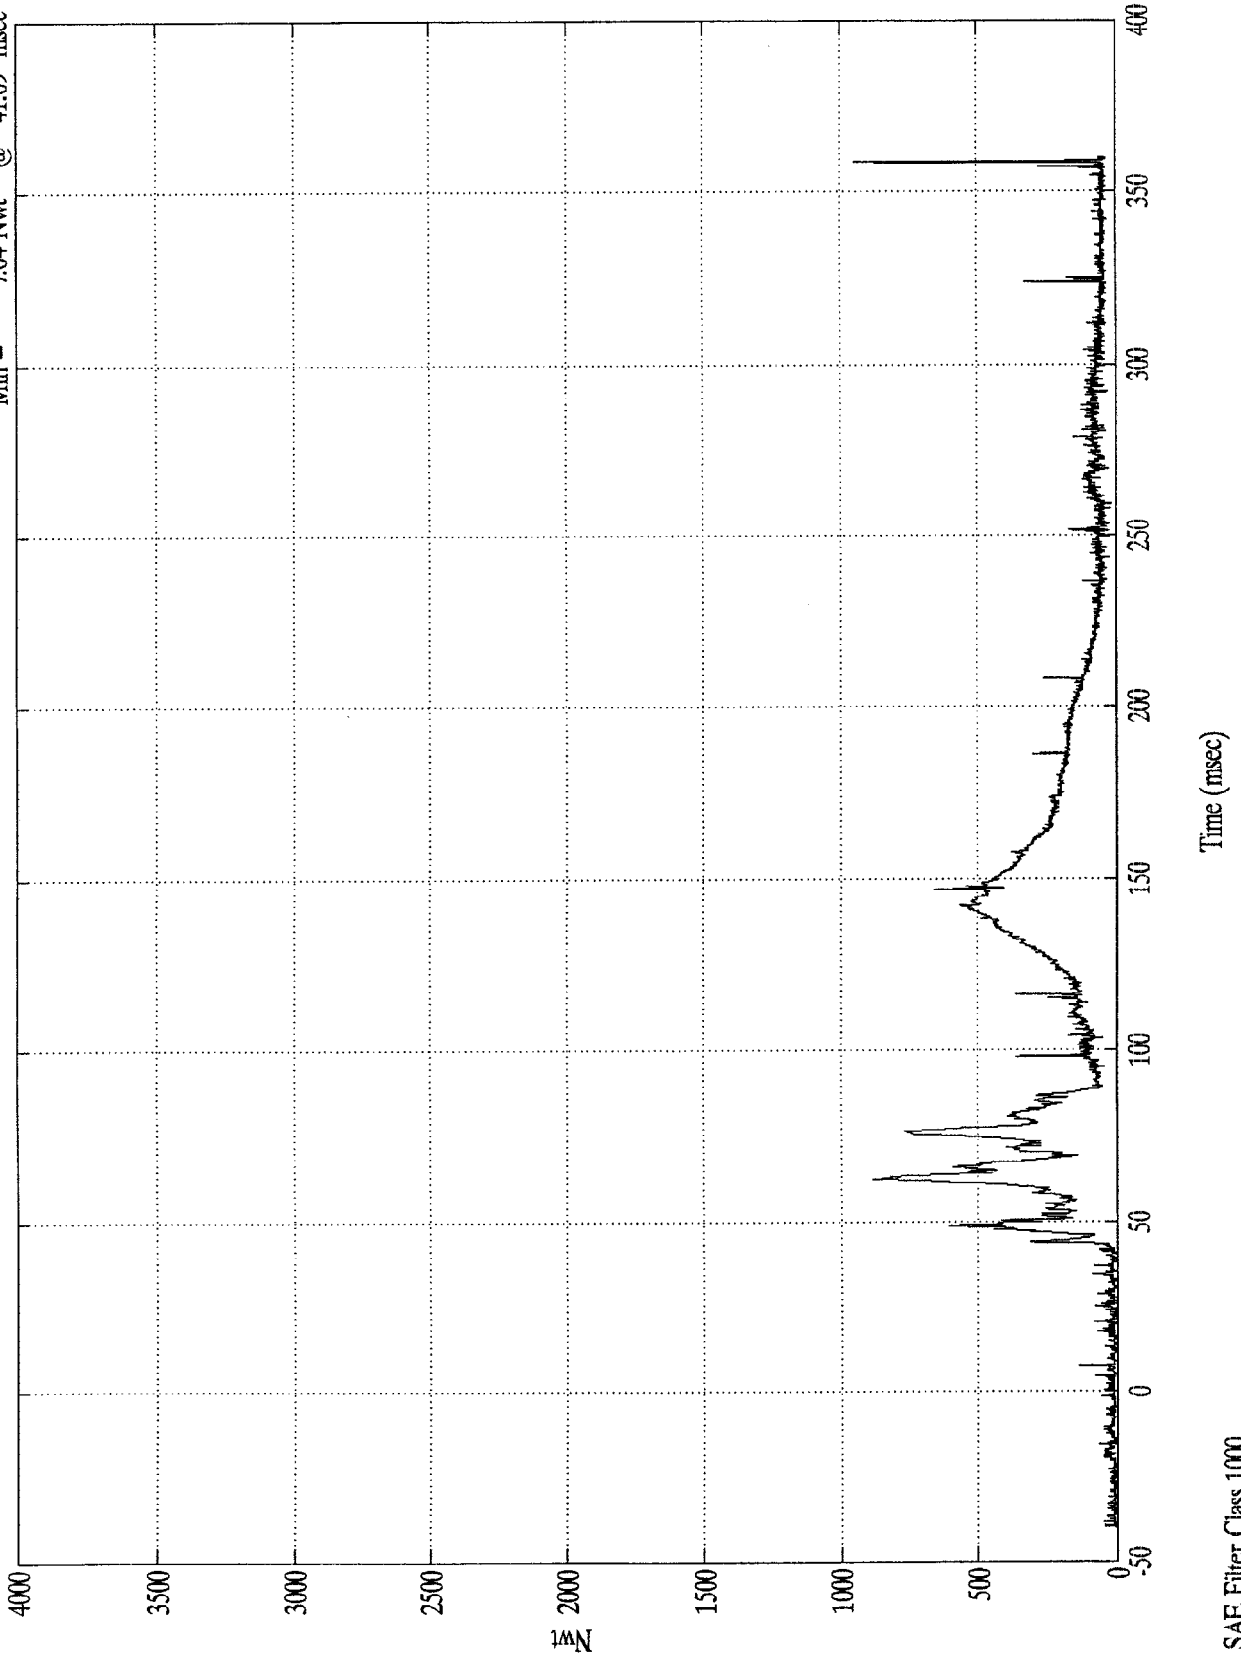


SAE Filter Class 1000

VTV TEST Ford Escort/Olds Cutlass

P2 Upper Neck Mx

Max = 13.39 Nwt-M @ 85.90 msec
Min = -9.57 Nwt-M @ 54.29 msec

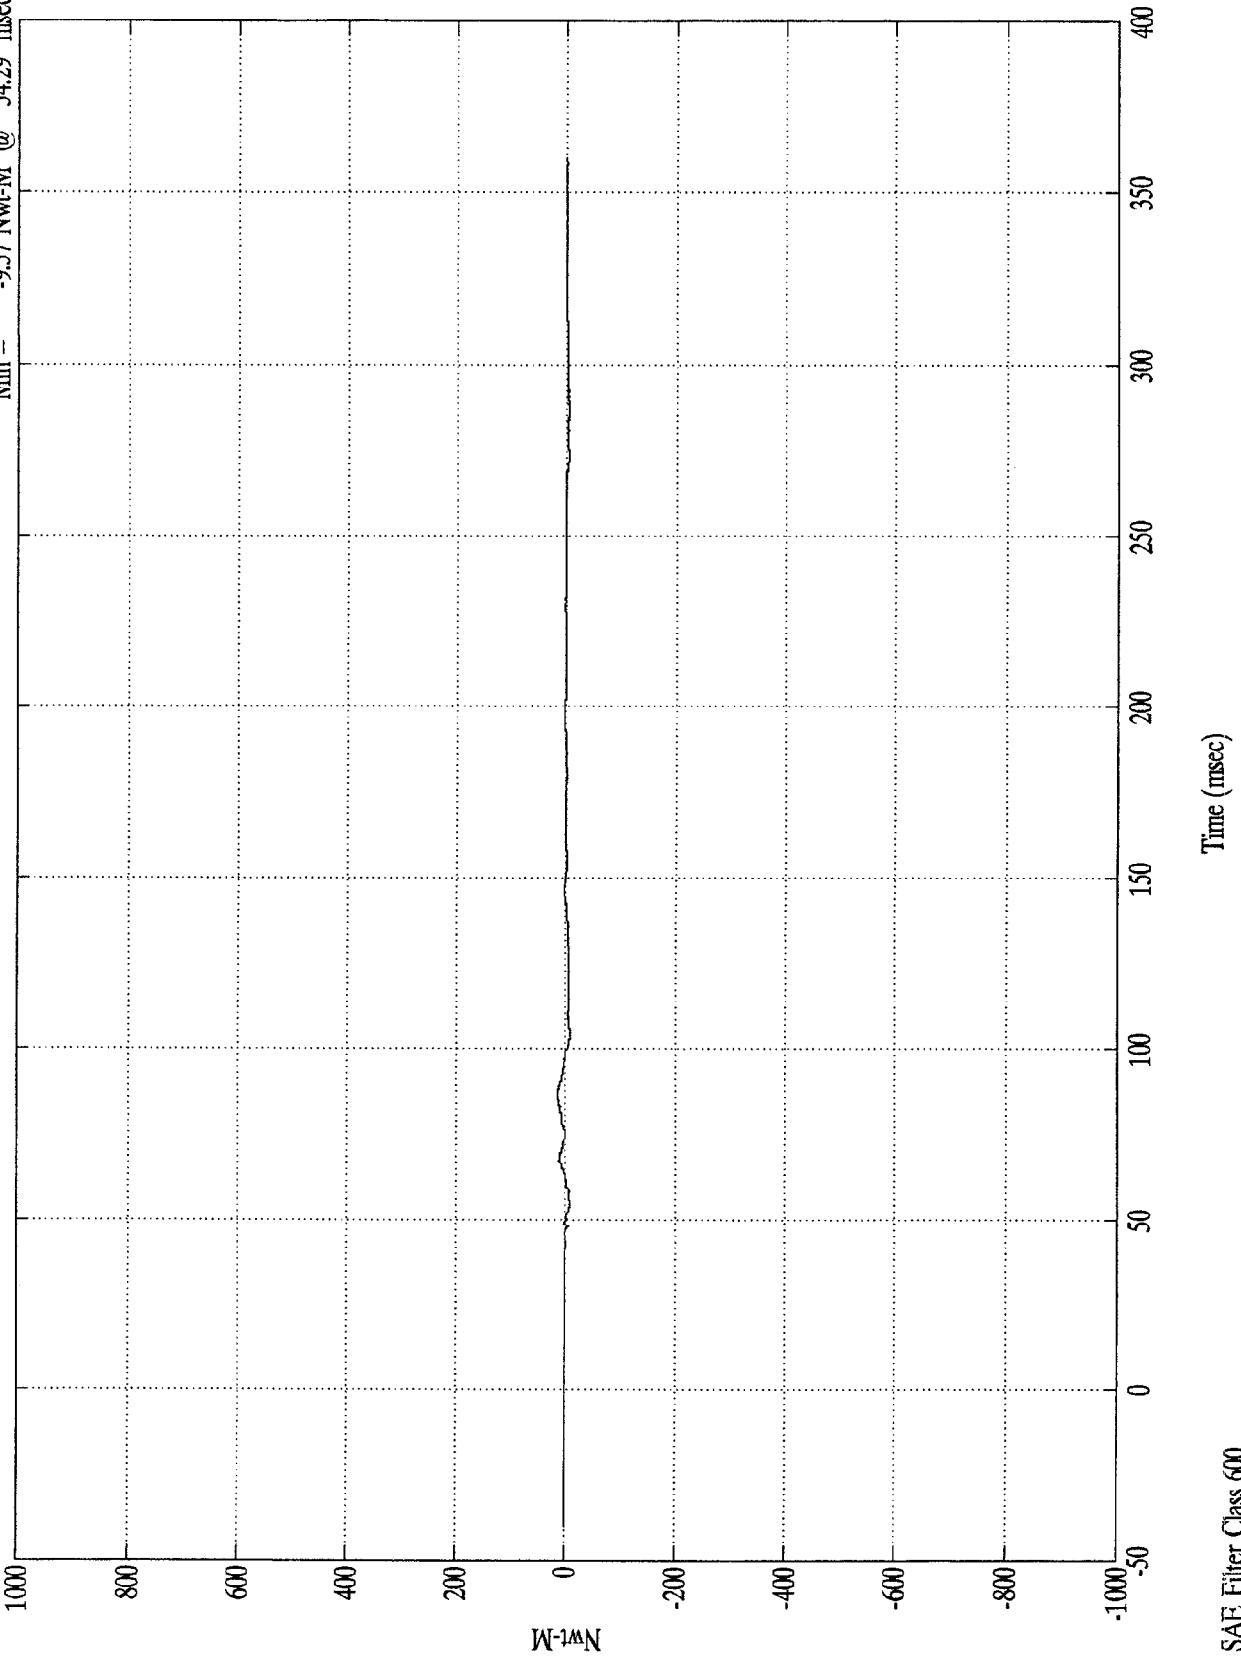

D-84


8404-5

SAE Filter Class 600

VTV TEST Ford Escort/Olds Cutlass

P2 Upper Neck My

Max = 17.85 Nwt-M @ 145.00 msec
Min = -18.75 Nwt-M @ 76.29 msec

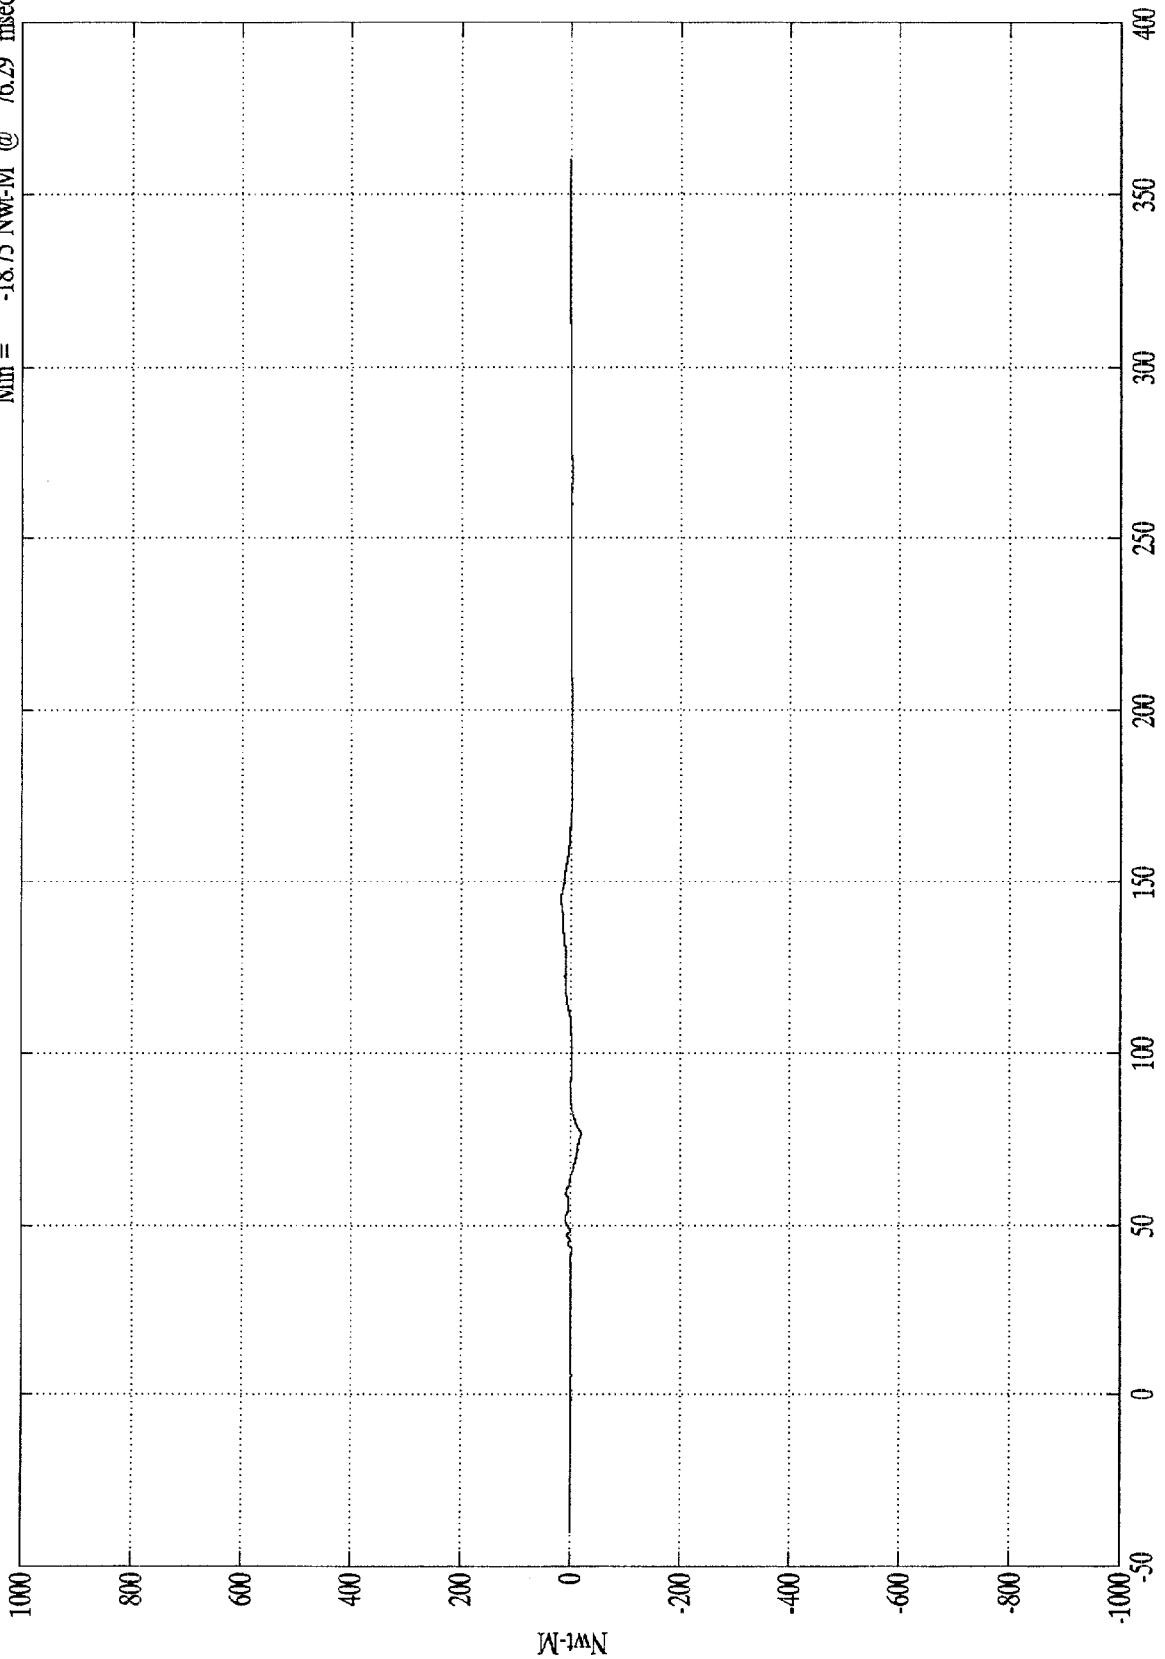

D-85


8404-5

SAE Filter Class 600

VTV TEST Ford Escort/Olds Cutlass

Max = 6.51 Nwt-M @ 104.39 msec
Min = -5.51 Nwt-M @ 81.19 msec

P2 Upper Neck Mz

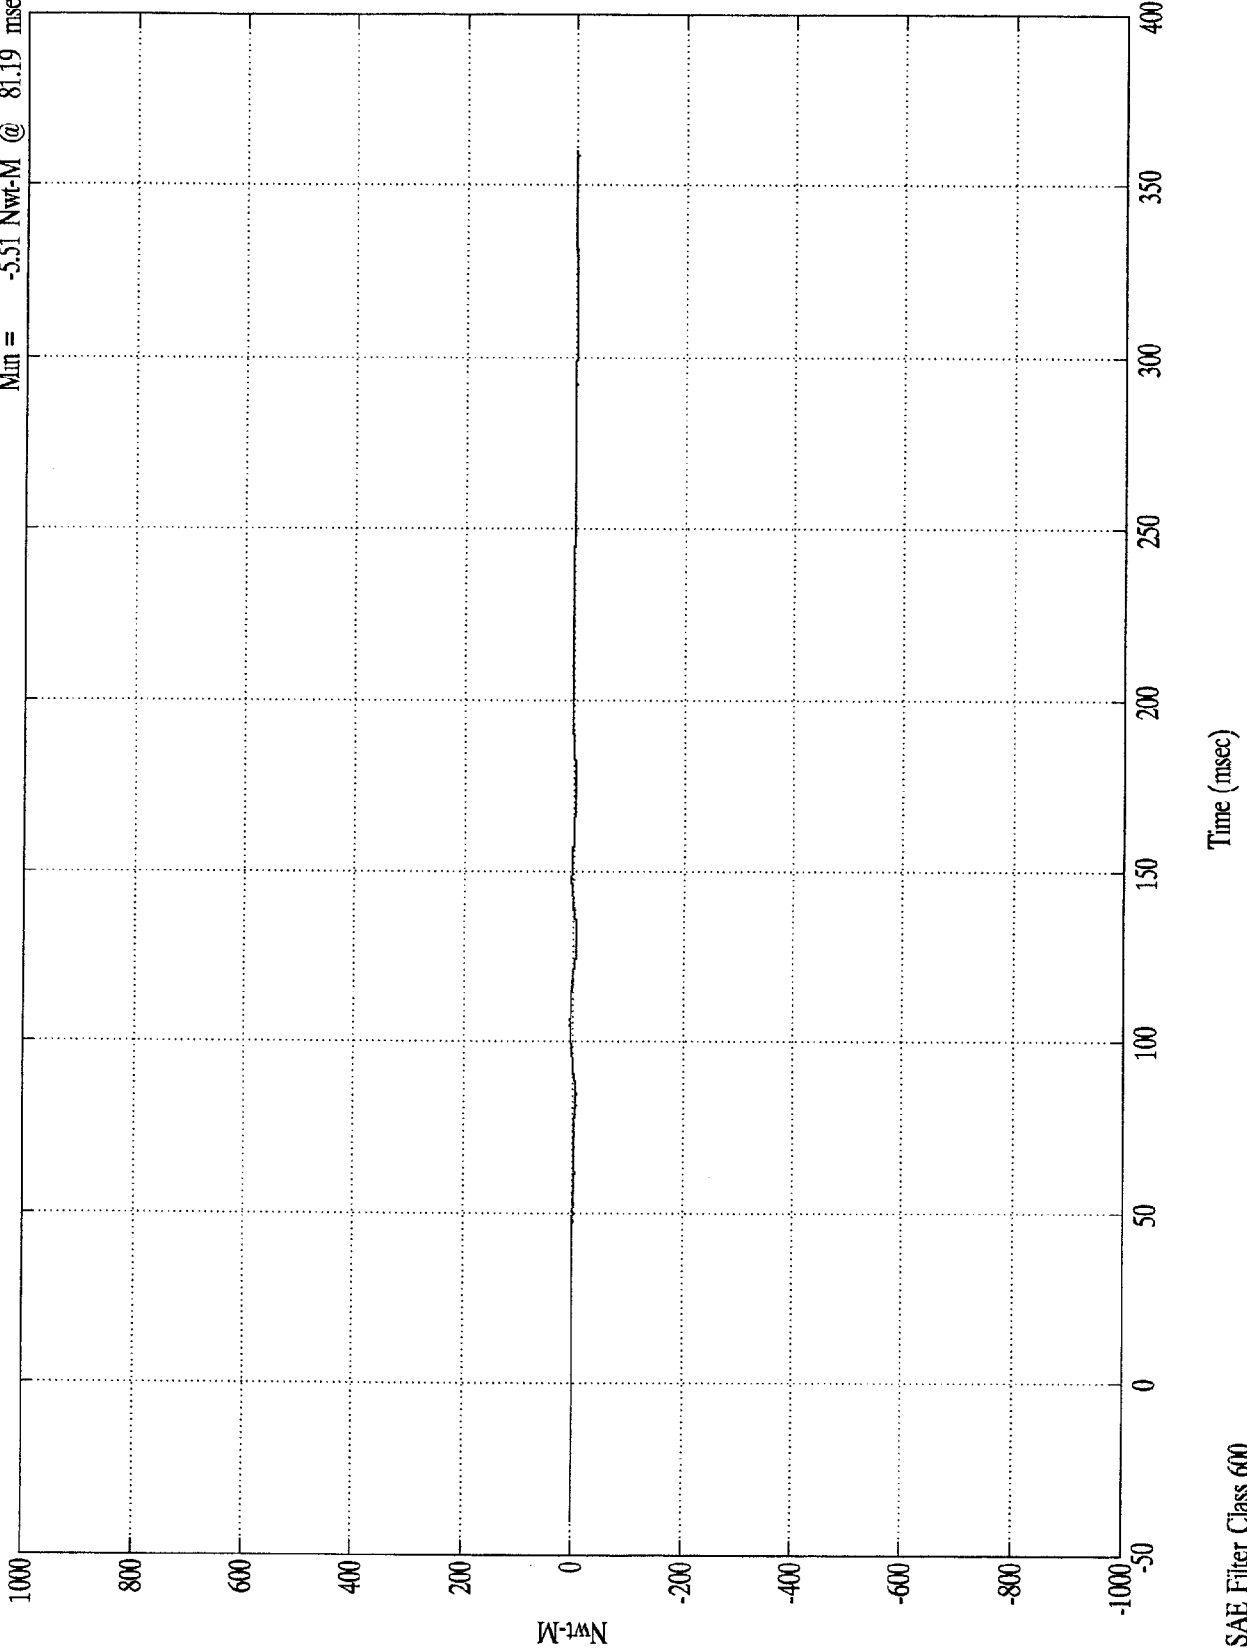

D-86


SAE Filter Class 600

8404-5

VTV TEST Ford Escort/Olds Cutlass

P2 Upper Neck Moment Res

Max = 19.06 Nwt-M @ 76.39 msec
Min = .06 Nwt-M @ -34.69 msec

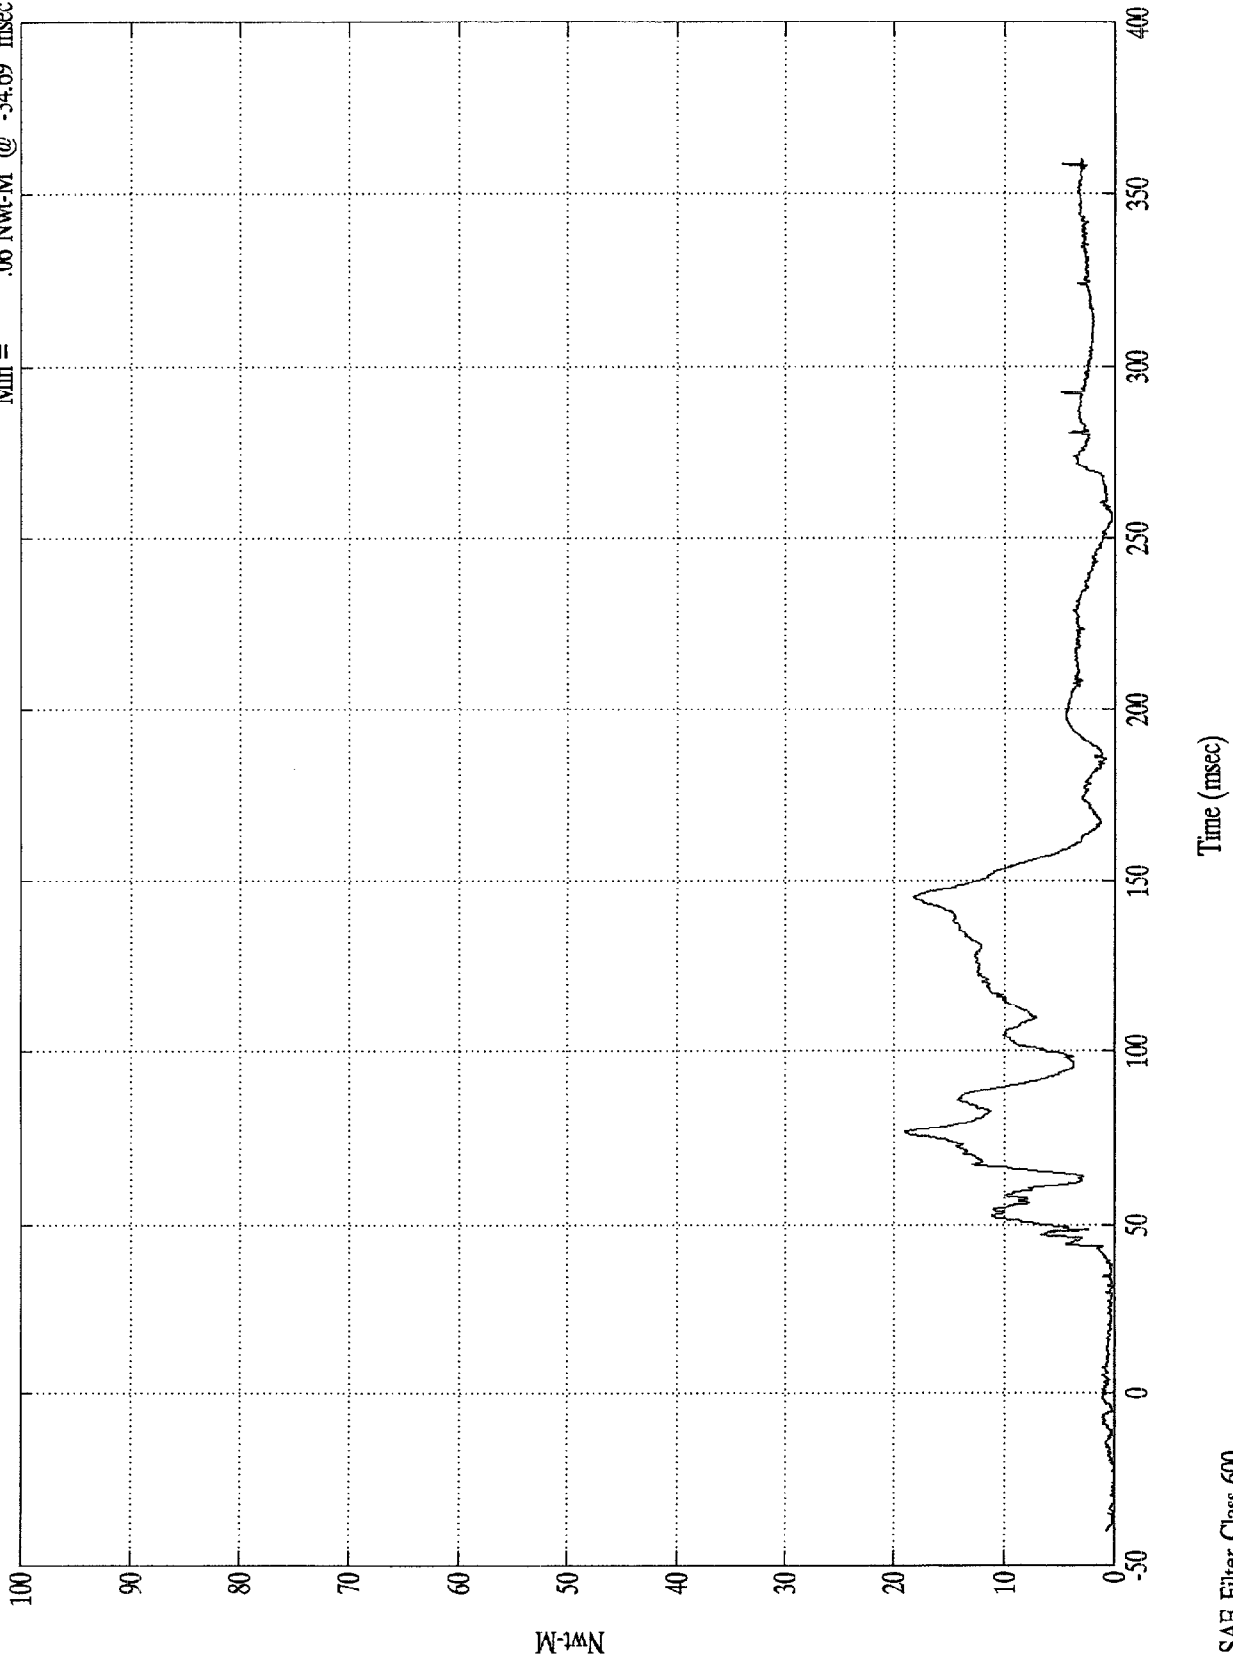

D-87

8404-5

SAE Filter Class 600


APPENDIX E

ACCIDENT RESEARCH DIVISION DATA

VEHICLE DAMAGE SKETCH

<p>TIRE - WHEEL DAMAGE</p> <p>a. Rotation physically restricted b. Tire deflated</p> <table style="width:100%;"> <tr> <td style="width:50%;"> RF <u>2</u> LF <u>↓</u> RR <u>↓</u> LR <u>↓</u> </td> <td style="width:50%;"> RF <u>2</u> LF <u>↓</u> RR <u>↓</u> LR <u>↓</u> </td> </tr> </table> <p>(1) Yes (2) No (8) NA (9) Unk.</p>	RF <u>2</u> LF <u>↓</u> RR <u>↓</u> LR <u>↓</u>	RF <u>2</u> LF <u>↓</u> RR <u>↓</u> LR <u>↓</u>	<p>ORIGINAL SPECIFICATIONS</p> <p>Wheelbase <u>250</u> cm</p> <p>Overall Length <u>432</u> cm</p> <p>Maximum Width <u>169</u> cm</p> <p>Curb Weight <u>1051</u> kg</p> <p>Average Track <u>144</u> cm</p> <p>Front Overhang <u>86</u> cm</p> <p>Rear Overhang <u>97</u> cm</p> <p>Undeformed End Width <u>154</u> ^{Rear} _{place} cm</p> <p>Engine Size: cyl./displ. <u>1-4, 1.9</u> L</p>	<p>WHEEL STEER ANGLES (For locked front wheels or displaced rear axles only)</p> <p>RF ± _____ °</p> <p>LF ± _____ °</p> <p>RR ± _____ °</p> <p>LR ± _____ °</p> <p>Within ± 5 degrees</p> <hr/> <p>DRIVE WHEELS</p> <p><input checked="" type="checkbox"/> FWD <input type="checkbox"/> RWD <input type="checkbox"/> 4WD</p> <hr/> <p>Approximate Cargo Weight <u>0</u> kg</p>
RF <u>2</u> LF <u>↓</u> RR <u>↓</u> LR <u>↓</u>	RF <u>2</u> LF <u>↓</u> RR <u>↓</u> LR <u>↓</u>			
<p>TYPE OF TRANSMISSION</p> <p><input type="checkbox"/> Manual <input type="checkbox"/> Automatic</p> <p>END SHIFT ≥ 10 CM</p> <p><input type="checkbox"/> Yes <input type="checkbox"/> No</p>				

MEASUREMENTS IN CENTIMETERS

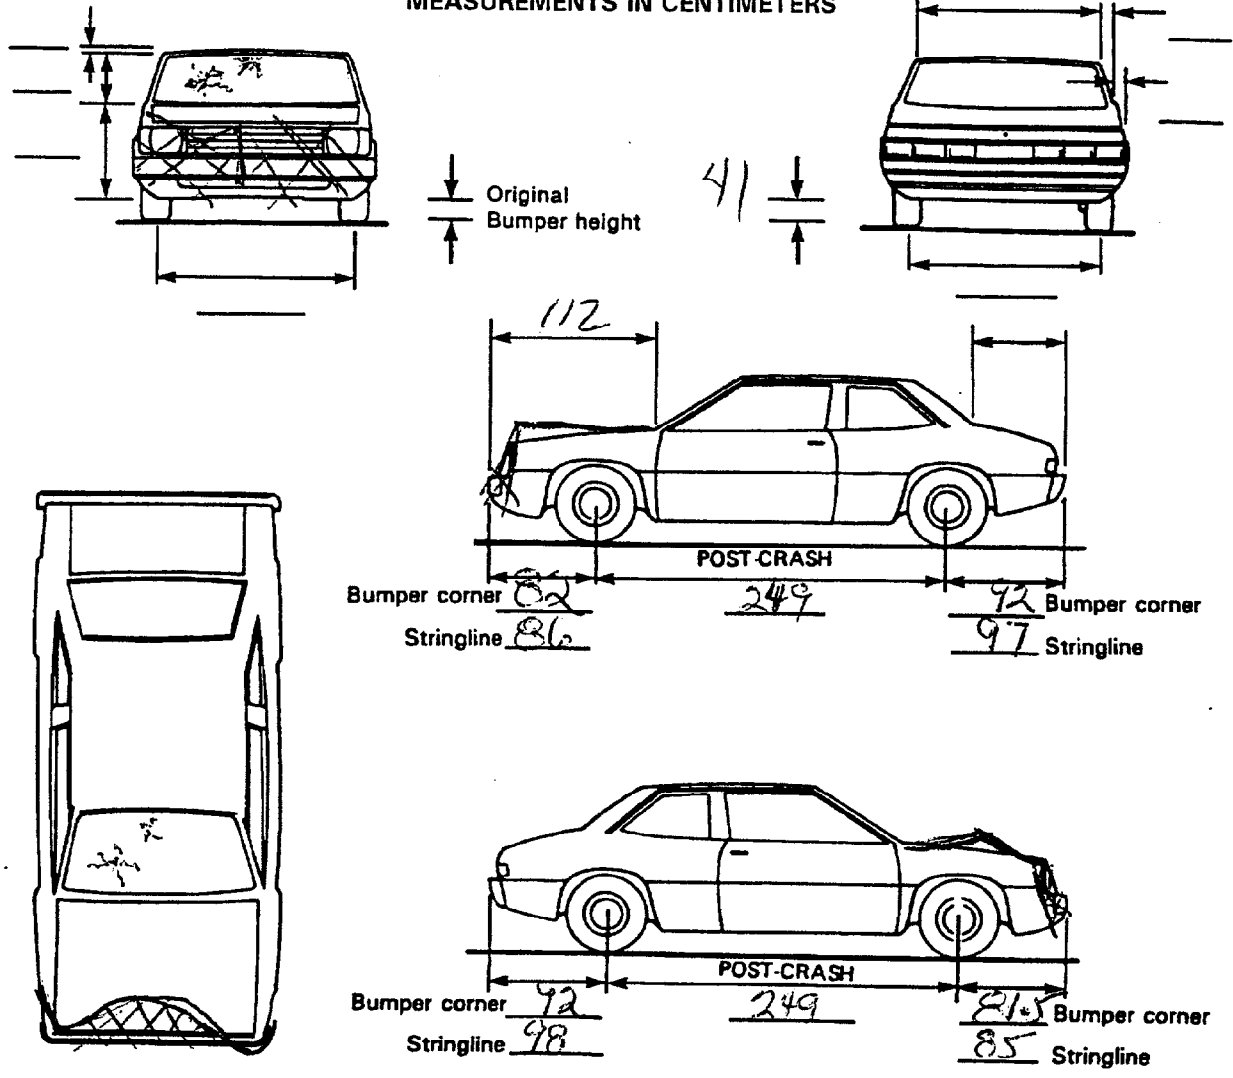

NOTES: Sketch new perimeter and cross hatch direct damage and single hatch induced damage on all views. Annotate observations which might be useful in reconstructing the accident (e.g., grass in tire bead, direction of striations, scuff on sidewalls, etc.). If pulling trailer, sketch type of trailer and damage received on the back of this page.

Annotate any damage caused by extrication such as component removal by torching, prying, or hydraulic shears.

COLLISION DEFORMATION CLASSIFICATION

HIGHEST DELTA "V"

Accident Event Sequence Number	Object Contacted	(1) (2) Direction of Force	(3) Deformation Location	(4) Longitudinal or Lateral Location	(5) Vertical or Lateral Location	(6) Type of Damage Distribution	(7) Deformation Extent
4. _____	5. _____	6. _____	7. _____	8. _____	9. _____	10. _____	11. _____

Second Highest Delta "V"

12. _____	13. _____	14. _____	15. _____	16. _____	17. _____	18. _____	19. _____
-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------

CRUSH PROFILE IN CENTIMETERS

The crush profile for the damage described in the CDC(s) above should be documented in the appropriate space below. (ALL MEASUREMENTS ARE IN CENTIMETERS.)

HIGHEST DELTA "V"

20. <u> L </u>	21. <u> C₁ </u>	<u> C₂ </u>	<u> C₃ </u>	<u> C₄ </u>	<u> C₅ </u>	<u> C₆ </u>	22. <u> ±D </u>
							+ ----- -----

Second Highest Delta "V"

23. <u> L </u>	24. <u> C₁ </u>	<u> C₂ </u>	<u> C₃ </u>	<u> C₄ </u>	<u> C₅ </u>	<u> C₆ </u>	25. <u> ±D </u>
							+ ----- -----

26. Undeformed End Width
(Coded when highest severity impact is an end plane impact.)
 154
Code to the nearest centimeter
(250) 250 centimeters or more
(998) No highest severity end plane impact
(999) Unknown

27. Direct Damage Width
(For highest severity impact)
 096
Code to the nearest centimeter
(250) 250 centimeters or more
(999) Unknown

28. Original Wheelbase
 Code to the nearest centimeter
(650) 650 centimeters or more
(999) Unknown
 inches X 2.54 = centimeters

29. Original Average Track Width
 Code to the nearest centimeter
(185) 185 centimeters or more
(999) Unknown
 inches X 2.54 = centimeters

		FUEL SYSTEM	
<p>30. Are CDCs Documented but Not Coded on The Automated File? (0) No (1) Yes</p>	<u>1</u>	<p>35. Location of Fuel Tank-1 Filler Cap</p>	<u>2</u>
<p>31. Researcher's Assessment of Vehicle Disposition (0) Not towed due to vehicle damage (1) Towed due to vehicle damage (9) Unknown</p>	<u>1</u>	<p>36. Location of Fuel Tank-2 Filler Cap (0) No fuel tank (1) On back plane (2) Aft of center of the rear wheels (rear axle) on left side plane (3) Aft of center of the rear wheels (rear axle) on right side plane (4) Forward of center of the rear wheels (rear axle) on left side plane (5) Forward of center of the rear wheels (rear axle) on right side plane (6) Over the center of the rear wheels (rear axle) on left side plane (7) Over the center of the rear wheels (rear axle) on right side plane (8) Other (specify): _____ (9) Unknown</p>	<u>0</u>
<p>32. Is This A Multi-Stage Manufactured Vehicle And/Or A Certified Altered Vehicle? (0) No post manufacturer modifications (1) Yes - post manufacturer modifications (specify): _____ _____ _____ (Include photograph of CERTIFICATION PLACARD in case report) (9) Unknown if vehicle is modified</p>	<u>0</u>	<p>37. Type of Fuel Tank-1</p>	<u>2</u>
FIRE OCCURRENCE		<p>38. Type of Fuel Tank-2 (0) No fuel tank (electrical vehicle) (1) Metallic (2) Non-metallic (9) Unknown</p>	<u>0</u>
<p>33. Fire Occurrence (0) No fire Yes, fire occurred (1) Minor (2) Major (9) Unknown</p>	<u>0</u>	<p>39. Location of Fuel Tank-1</p>	<u>4</u>
<p>34. Origin of Fire (0) No fire (1) Vehicle exterior (front, side, back, top) (2) Exhaust system (3) Fuel tank (and other fuel retention system parts) (4) Engine compartment (5) Cargo/trunk compartment (6) Instrument panel (7) Passenger compartment area (8) Other location (specify): _____ (9) Unknown</p>	<u>0</u>	<p>40. Location of Fuel Tank-2 (0) No fuel tank (1) Aft of center of the rear wheels (rear axle) centered (2) Aft of center of the rear wheels (rear axle) left side (3) Aft of center of the rear wheels (rear axle) right side (4) Forward of center of the rear wheels (rear axle) centered (5) Forward of center of the rear wheels (rear axle) left side (6) Forward of center of the rear wheels (rear axle) right side (7) Over center of the rear wheels (rear axle) (8) Other (specify): _____ (9) Unknown</p>	<u>0</u>
		<p>41. Damage to Fuel Tank-1</p>	<u>1</u>
		<p>42. Damage to Fuel Tank-2 (0) No fuel tank (1) No damage to fuel tank (2) Deformed, no seam failure (3) Deformed, with a seam failure (4) Punctured (5) Lacerated (ripped) (6) Abraded (scraped) (7) Filler neck separation from the fuel tank (8) Other damage (specify): _____ (9) Unknown</p>	<u>0</u>

<p>43. Leakage Location of Fuel System-1 <u>1</u></p> <p>44. Leakage Location of Fuel System-2 <u>0</u></p> <p>(0) No fuel tank (1) No fuel leakage</p> <p><i>Primary Area Of Leakage</i></p> <p>(2) Tank (3) Filler neck (4) Cap (5) Lines/pump/filter (6) Vent/emission recovery (8) Other (specify): _____ (9) Unknown</p> <p>45. Fuel Type-1 <u>0 1</u></p> <p>46. Fuel Type-2 <u>0 0</u></p> <p><i>Single Fuel Type</i></p> <p>(00) No fuel tank (01) Gasoline (02) Diesel (03) CNG (Compressed Natural Gas) (04) LPG (Liquid Petroleum Gas) also known as Propane (05) LNG (Liquid Natural Gas) (06) Methanol (M100 or M85) (07) Ethanol (E100 or E85) (08) Other (Hydrogen or others) (specify): _____</p> <p>_____</p> <p><i>Electric Powered or Electric/Solar Powered Vehicles</i></p> <p>(10) Lead Acid Battery (11) Nickel-Iron Battery (12) Nickel-Cadmium Battery (13) Sodium Metal Chloride Battery (14) Sodium Sulfur Battery (18) Other (Specify): _____</p> <p>(98) Other Hybrid (specify): _____</p> <p>_____</p> <p>(99) Unknown fuel type</p>	<p>47. Is This Vehicle Equipped With More Than Two Fuel Tanks? <u>0</u></p> <p>(0) No (one or two tanks only)</p> <p><i>Yes - More Than Two Tanks</i></p> <p>(1) Yes -- <u>no damage</u> to any tank or filler cap and <u>no fuel system leakage</u></p> <p>(2) Yes -- <u>no damage</u> to any tank or filler cap but <u>there is fuel system leakage</u> (specify leakage location): _____</p> <p>(3) Yes -- <u>damage</u> to an additional tank or filler cap and <u>there is fuel system leakage</u> (specify the following): Type of tank _____ Tank location _____ Filler cap location _____ Tank damage _____ Location of leakage _____ Type of fuel _____</p> <p>(9) Unknown if more than two tanks</p>
<p>COMMENTS</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p>	

*** STOP: IF THE CDS APPLICABLE VEHICLE WAS NOT TOWED ***

(GV10=0)

DO NOT COMPLETE THE INTERIOR VEHICLE FORM.



EXTERIOR VEHICLE LOG

TO BE COMPLETED BY TEAM																																																																																									
1. PSU Number _____	14. Number of Coded CDCs (0,1,2) _____																																																																																								
2. Case Number—Stratum _____	15. Number of Coded Crush Profiles (0,1,2) _____																																																																																								
3. Researcher Completing Form _____																																																																																									
4. Vehicle Number <u>081</u>																																																																																									
5. Date Vehicle Inspected <u>08/19/97</u>																																																																																									
6. Number of Exterior Vehicle Slides _____																																																																																									
TO BE COMPLETED BY ZONE CENTER																																																																																									
7. Applicable Precrash Measurements _____ (0) Not applicable (1) Substandard - beyond researcher control (2) Substandard (3) Standard	<p style="text-align: center;">DATA STATUS OF VARIABLE NUMBERS 4-47</p> <p>Highest CDC</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>4</td><td>5</td><td>6</td><td>7</td><td>8</td><td>9</td><td>10</td><td>11</td> </tr> <tr> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> </tr> </table> <p>Secondary CDC</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>12</td><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td> </tr> <tr> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> </tr> </table> <p>Highest Crush Profile</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>20</td><td>21</td><td>22</td> </tr> <tr> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> </tr> </table> <p>Secondary Crush Profile</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>23</td><td>24</td><td>25</td> </tr> <tr> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> </tr> </table> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>26</td><td>27</td><td>28</td><td>29</td><td>30</td><td>31</td><td>32</td><td>33</td><td>34</td><td>35</td><td>36</td> </tr> <tr> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> </tr> </table> <table style="margin-left: auto; margin-right: auto;"> <tr> <td>37</td><td>38</td><td>39</td><td>40</td><td>41</td><td>42</td><td>43</td><td>44</td><td>45</td><td>46</td><td>47</td> </tr> <tr> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> <td style="border: 1px solid black; width: 20px; height: 15px;"></td> </tr> </table> <p>Data Status Codes:</p> <p>(Blank) Correct (1) Derived error (2) Non-correctable error (3) Correctable error (4) Change—no error (5) Sequencing error (7) Incorrect edit override (8) MDE error (9) Unknown coded</p>	4	5	6	7	8	9	10	11									12	13	14	15	16	17	18	19									20	21	22				23	24	25				26	27	28	29	30	31	32	33	34	35	36												37	38	39	40	41	42	43	44	45	46	47											
4	5	6	7	8	9	10	11																																																																																		
12	13	14	15	16	17	18	19																																																																																		
20	21	22																																																																																							
23	24	25																																																																																							
26	27	28	29	30	31	32	33	34	35	36																																																																															
37	38	39	40	41	42	43	44	45	46	47																																																																															
8. Reference Line Placement _____ (0) Not applicable (e.g. rollover) (1) Substandard - beyond researcher control (2) Substandard (3) Standard																																																																																									
9. Impact Damage Documentation _____ (0) Not applicable (1) Substandard - beyond researcher control (2) Substandard (3) Standard																																																																																									
10. Quality Of Vehicle Damage Sketch _____ (0) Not applicable (e.g., repaired vehicle) (1) Substandard - beyond researcher control (2) Substandard (3) Standard																																																																																									
11. Exterior Slides Subject Quality _____ (0) Not applicable (1) Substandard - beyond researcher control (2) Substandard (3) Standard																																																																																									
12. Exterior Slides Quality _____ (0) Not applicable (1) Substandard - beyond researcher control (2) Substandard (3) Standard																																																																																									
13. Primary Error Source (Vehicle Plane) _____ (0) No error (1) Front (2) Side (left or right) (3) Back (rear) (4) Top (5) Undercarriage (8) Other (specify): _____																																																																																									

IF THIS VEHICLE WAS NOT TOWED (I.E., GV09 ≠ 1), DO NOT COMPLETE THE INTERIOR VEHICLE LOG



INTERIOR VEHICLE FORM

1. Primary Sampling Unit Number _____
 2. Case Number - Stratum _____
 3. Vehicle Number 01

INTEGRITY

4. Passenger Compartment Integrity 00
 (00) No integrity loss

Yes, Integrity Was Lost Through

(01) Windshield
 (02) Door (side)
 (03) Door/hatch (back door)
 (04) Roof
 (05) Roof glass
 (06) Side window
 (07) Rear window (backlight)
 (08) Roof and roof glass
 (09) Windshield and door (side)
 (10) Windshield and roof
 (11) Side and rear window (side window and backlight)
 (12) Windshield and side window
 (13) Door and side window
 (98) Other combination of above (specify): _____
 (99) Unknown

Door, Tailgate or Hatch Opening

5. LF 1 6. RF 1 7. LR 0 8. RR 0 9. TG/H 1

(0) No door/gate/hatch
 (1) Door/gate/hatch remained closed and operational
 (2) Door/gate/hatch came open during collision
 (3) Door/gate/hatch jammed shut
 (8) Other (specify): _____
 (9) Unknown

Damage/Failure Associated with Door, Tailgate or Hatch Opening in Collision. If IV05-IV09 ≠ 2, Then code Ø

10. LF 0 11. RF 0 12. LR 0 13. RR 0 14. TG/H 0

(0) No door/gate/hatch or door not opened

Door, Tailgate or Hatch Came Open During Collision

(1) Door operational (no damage)
 (2) Latch/striker failure due to damage
 (3) Hinge failure due to damage
 (4) Door structure failure due to damage
 (5) Door support (i.e., pillar, sill, roof side rail, etc.) failure due to damage
 (6) Latch/striker and hinge failure due to damage
 (8) Other failure (specify): _____
 (9) Unknown

GLAZING

Type of Window/Windshield Glazing

15. WS 1 16. LF 2 17. RF 2 18. LR 2 19. RR 2
 20. BL 2 21. Roof 0 22. Other 0

(0) No glazing
 (1) AS-1 — Laminated
 (2) AS-2 — Tempered
 (3) AS-3 — Tempered-tinted (original)
 (4) AS-2 — Tempered-with after market tint
 (5) AS-3 — Tempered-tinted (with additional after market tint)
 (6) AS-14 — Glass/Plastic
 (7) Glazing removed prior to accident
 (8) Other (specify): _____
 (9) Unknown

Window Precrash Glazing Status

23. WS 1 24. LF 2 25. RF 2 26. LR 2 27. RR 2
 28. BL 1 29. Roof 0 30. Other 0

(0) No glazing
 (1) Fixed
 (2) Closed
 (3) Partially opened
 (4) Fully opened
 (7) Glazing removed prior to accident
 (9) Unknown

Glazing Damage from Impact Forces

31. WS 1 32. LF 1 33. RF 1 34. LR 1 35. RR 1
 36. BL 1 37. Roof 0 38. Other 0

(0) No glazing
 (1) No glazing damage from impact forces
 (2) Glazing in place and cracked from impact forces
 (3) Glazing in place and holed from impact forces
 (4) Glazing out-of-place (cracked or not) and not holed from impact forces
 (5) Glazing out-of-place and holed from impact forces
 (6) Glazing disintegrated from impact forces
 (7) Glazing removed prior to accident
 (9) Unknown if damaged

Glazing Damage from Occupant Contact

39. WS 1 40. LF 1 41. RF 1 42. LR 1 43. RR 1
 44. BL 1 45. Roof 0 46. Other 0

(0) No glazing
 (1) No occupant contact to glazing
 (2) Glazing contacted by occupant but no glazing damage
 (3) Glazing in place and cracked by occupant contact
 (4) Glazing in place and holed by occupant contact
 (5) Glazing out-of-place (cracked or not) by occupant contact and not holed by occupant contact
 (6) Glazing out-of-place by occupant contact and holed by occupant contact
 (7) Glazing removed prior to accident
 (8) Glazing disintegrated by occupant contact
 (9) Unknown if contacted by occupant

OCCUPANT AREA INTRUSION

Note: If no intrusions, leave variables IV47-IV86 blank.

	Location of Intrusion	Intruding Component	Magnitude of Intrusion	Dominant Crush Direction
1st	47. _____	48. _____	49. _____	50. _____
2nd	51. _____	52. _____	53. _____	54. _____
3rd	55. _____	56. _____	57. _____	58. _____
4th	59. _____	60. _____	61. _____	62. _____
5th	63. _____	64. _____	65. _____	66. _____
6th	67. _____	68. _____	69. _____	70. _____
7th	71. _____	72. _____	73. _____	74. _____
8th	75. _____	76. _____	77. _____	78. _____
9th	79. _____	80. _____	81. _____	82. _____
10th	83. _____	84. _____	85. _____	86. _____

INTRUDING COMPONENT

Interior Components

- (01) Steering assembly
- (02) Instrument panel left
- (03) Instrument panel center
- (04) Instrument panel right
- (05) Toe pan
- (06) A (A1/A2)-pillar
- (07) B-pillar
- (08) C-pillar
- (09) D-pillar
- (10) Side panel - forward of the A1/A2-pillar
- (11) Door panel (side)
- (12) Side panel - rear of the B-pillar
- (13) Roof (or convertible top)
- (14) Roof side rail
- (15) Windshield
- (16) Windshield header
- (17) Window frame
- (18) Floor pan (includes sill)
- (19) Backlight header
- (20) Front seat back
- (21) Second seat back
- (22) Third seat back
- (23) Fourth seat back
- (24) Fifth seat back
- (25) Seat cushion
- (26) Back door/panel (e.g., tailgate)
- (27) Other interior component (specify): _____

Exterior Components

- (30) Hood
- (31) Outside surface of this vehicle (specify): _____
- (32) Other exterior object in the environment (specify): _____
- (33) Unknown exterior object
- (97) Catastrophic
- (98) Intrusion of unlisted component(s) (specify): _____
- (99) Unknown

LOCATION OF INTRUSION

- Front Seat
- (11) Left
 - (12) Middle
 - (13) Right

- Fourth Seat
- (41) Left
 - (42) Middle
 - (43) Right

- Second Seat
- (21) Left
 - (22) Middle
 - (23) Right

- (97) Catastrophic
- (98) Other enclosed area (specify) _____

- Third Seat
- (31) Left
 - (32) Middle
 - (33) Right

- (99) Unknown

MAGNITUDE OF INTRUSION

- (1) ≥ 3 centimeters but < 8 centimeters
- (2) ≥ 8 centimeters but < 15 centimeters
- (3) ≥ 15 centimeters but < 30 centimeters
- (4) ≥ 30 centimeters but < 46 centimeters
- (5) ≥ 46 centimeters but < 61 centimeters
- (6) ≥ 61 centimeters
- (7) Catastrophic
- (9) Unknown

DOMINANT CRUSH DIRECTION

- (1) Vertical
- (2) Longitudinal
- (3) Lateral
- (7) Catastrophic
- (9) Unknown

STEERING COLUMN **INSTRUMENT PANEL**

87. Steering Column Type 1
 (1) Fixed column
 (2) Tilt column
 (3) Telescoping column
 (4) Tilt and telescoping column
 (8) Other column type (specify): _____
 (9) Unknown


88. Tilt Steering Column Adjustment 0
 (0) No tilt steering column
 (1) Full up
 (2) Between full up and center
 (3) Center
 (4) Between center and full down
 (5) Full down
 (9) Unknown

89. Telescoping Steering Column Adjustment 0
 (0) No telescoping steering column
 (1) Full back
 (2) Between full back and midpoint
 (3) Midpoint
 (4) Between midpoint and full forward
 (5) Full forward
 (9) Unknown



90. Steering Rim/Spoke Deformation 0 0
 Code actual measured deformation to the nearest centimeter
 (00) No steering rim deformation
 (01-14) Actual measured value in centimeters
 (15) 15 centimeters or more
 (98) Observed deformation cannot be measured
 (99) Unknown

91. Location of Steering Rim/Spoke Deformation 0 0
 (00) No steering rim deformation

Quarter Sections
 (01) Section A
 (02) Section B
 (03) Section C
 (04) Section D



Half Sections
 (05) Upper half of rim/spoke
 (06) Lower half of rim/spoke
 (07) Left half of rim/spoke
 (08) Right half of rim/spoke

(09) Complete steering wheel collapse
 (10) Undetermined location
 (99) Unknown

92. Odometer Reading 50,000
 _____ kilometers
 Code to the nearest 1,000 kilometers
 (000) No odometer
 (001) Less than 1,500 kilometers
 (500) 499,500 kilometers or more
 (999) Unknown
30.761 miles X 1.6093 = 49,504 kilometers
 Source: _____

93. Instrument Panel Damage from Occupant Contact? 0
 (0) No
 (1) Yes
 (9) Unknown


94. Type of Knee Bolster Covering 2
 (0) No knee bolster
 (1) Padded
 (2) Rigid plastic
 (8) Other (specify): _____
 (9) Unknown

95. Knee Bolsters Deformed from Occupant Contact? 1
 (0) No knee bolster
 (1) No deformation
 (2) Yes - deformation
 (9) Unknown

96. Did Glove Compartment Door Open During Collision(s)? 0
 (0) No glove compartment door
 (1) No - door did not open
 (2) Yes - door opened
 (9) Unknown


97. Adaptive (Assistive) Driving Equipment 0
 (0) No adaptive driving equipment
 (1) Adaptive driving equipment installed (Check all that apply.)
 [] Hand controls for braking/acceleration
 [] Steering control devices (attached to OEM steering wheel)
 [] Steering knob attached to steering wheel
 [] Low effort power steering (unit or device)
 [] Replacement steering wheel (i.e., reduced diameter)
 [] Joy-stick steering controls
 [] Wheelchair tie-downs
 [] Modification to seat belts (specify): _____
 [] Additional or relocated switches (specify): _____
 [] Raised roof
 [] Wall-mounted head rest (used behind wheelchair)
 [] Other adaptive device (specify): _____
 (9) Unknown

- A 8cm long, 38cm above floor, 25 - 33 cm \odot of E
- B 2.5 long \times 1.5 tall, 44cm above floor, 26.5 - 29 cm \odot of E
- C 1.5cm tall (Red) line, 45cm above floor, 18cm \odot of E
- D 2cm \times 2cm, 40cm above floor, 13.5 cm \odot of E
- E 10cm \times 9cm on upper R corner of seat back, 0 - 10cm \odot of Right edge of seat.
- F 6cm \times 4cm on lower R corner Head Rest, 3 - 9cm \odot of Right edge
- G See sketch below
- H 1.5 \times 1.5cm, 47cm above floor, 25.5cm \odot of Right edge of IP
- I 1.5 \times 1.5cm, 47cm above floor, 20.5 cm \odot of Right edge of IP
- J 2 \times 5.5cm, 40 - 44cm above floor, 21.5 - 23.5 cm \odot of R edge of IP

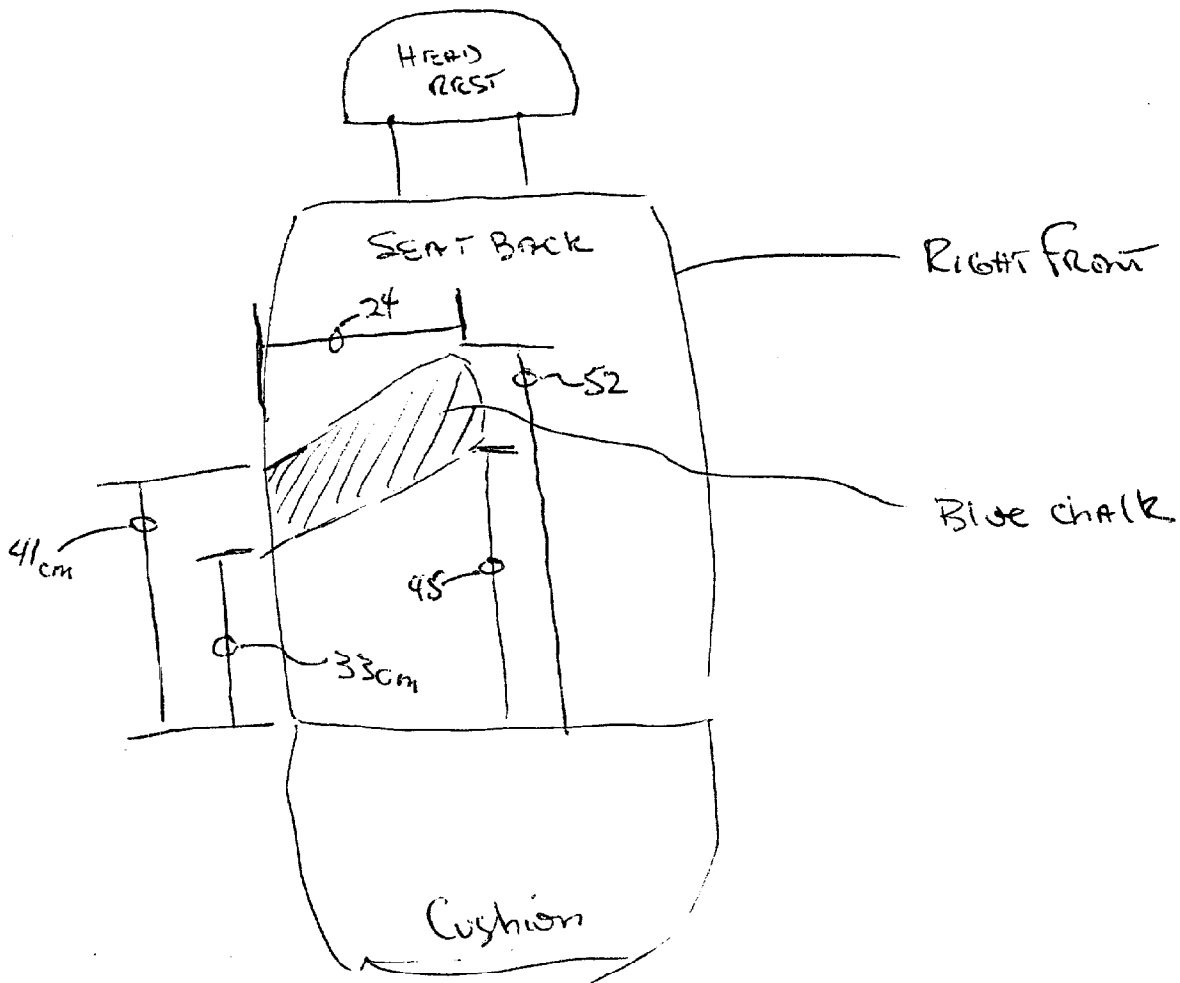

VEHICLE INTERIOR SKETCHES

Note area of ejection/entrapment

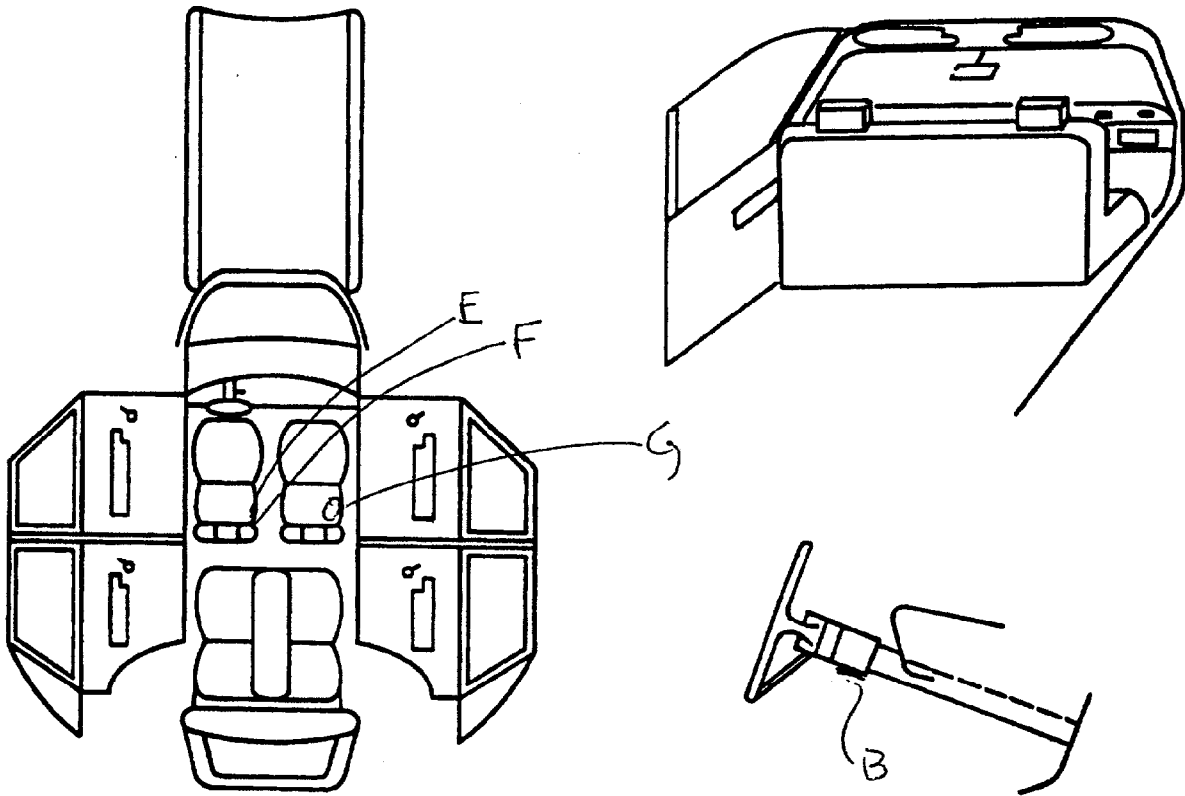

Sketch windshield contact(s) and the damaged area(s) on the instrument panel outline (e.g., radio, glove compartment, damage to instrument panel structure).
 Cross hatch contact points, draw spider webs or use other annotation as may be appropriate.
 Annotate the contacted area with a letter (begin with A) and list on the Points of Occupant Contact page.

POINTS OF OCCUPANT CONTACT

Contact	Interior Component Contacted	Occupant No. If Known	Body Region If Known	Supporting Physical Evidence	Confidence Level of Contact Point
A	014	01	(L) KNEE	Blue CHALK	1
B	007	01	(R) KNEE	Red CHALK	1
C	014	01	(R) KNEE	Red CHALK	1
D	014	01	(R) KNEE	Red chalk	1
E	151	01	HEAD	Yellow chalk	1
F	155	01	HEAD	Yellow chalk	1
G	158		HEAD	Blue chalk	1
H	013		R FOOT	Scuff	3
I	013		R FOOT	Scuff	3
J	013		R FOOT	Scuff	3
K					
L					
M					
N					

CODES FOR INTERIOR COMPONENTS

FRONT

- (001) Windshield
- (002) Mirror
- (003) Sunvisor
- (004) Steering wheel rim
- (005) Steering wheel hub/spoke
- (006) Steering wheel (combination of codes 004 and 005)
- (007) Steering column, transmission selector lever, other attachment
- (008) Cellular telephone or CB radio
- (009) Add on equipment (e.g., tapedeck, air conditioner)
- (010) Left instrument panel and below
- (011) Center instrument panel and below
- (012) Right instrument panel and below
- (013) Glove compartment door
- (014) Knee bolster
- (015) Windshield including one or more of the following: front header, A (A1/A2)-pillar, instrument panel, mirror, or steering assembly (driver side only)
- (016) Windshield including one or more of the following: front header, A (A1/A2)-pillar, instrument panel, or mirror (passenger side only)
- (017) Windshield reinforced by exterior object, (specify): _____
- (019) Other front object (specify): _____

LEFT SIDE

- (051) Left side interior surface, excluding hardware or armrests
- (052) Left side hardware or armrest
- (053) Left A (A1/A2)-pillar
- (054) Left B-pillar
- (055) Other left pillar (specify): _____
- (056) Left side window glass
- (057) Left side window frame
- (058) Left side window sill
- (059) Left side window glass including one or more of the following: frame, window sill, A (A1/A2)-pillar, B-pillar, or roof side rail.
- (060) Other left side object (specify): _____
- RIGHT SIDE**
- (101) Right side interior surface, excluding hardware or armrests
- (102) Right side hardware or armrest
- (103) Right A (A1/A2)-pillar
- (104) Right B-pillar
- (105) Other right pillar (specify): _____
- (106) Right side window glass
- (107) Right side window frame
- (108) Right side window sill
- (109) Right side window glass including one or more of the following: frame, window sill, A (A1/A2)-pillar, B-pillar, or roof side rail.
- (110) Other right side object (specify): _____

INTERIOR

- (151) Seat, back support
- (152) Belt restraint webbing/buckle
- (153) Belt restraint B-pillar or door frame attachment point
- (154) Other restraint system component (specify): _____
- (155) Head restraint system
- (160) Other occupants (specify): _____
- (161) Interior loose objects
- (162) Child safety seat (specify): _____
- (163) Other interior object (specify): _____
- AIR BAG**
- (170) Air bag-driver side
- (175) Air bag compartment cover-driver side
- (180) Air bag-passenger side
- (185) Air bag compartment cover-passenger side
- (190) Other air bag (specify)
- (195) Other air bag compartment cover (specify)

ROOF

- (201) Front header
- (202) Rear header
- (203) Roof left side rail
- (204) Roof right side rail
- (205) Roof or convertible top

FLOOR

- (251) Floor (including toe pan)
- (252) Floor or console mounted transmission lever, including console
- (253) Parking brake handle
- (254) Foot controls including parking brake

REAR

- (301) Backlight (rear window)
- (302) Backlight storage rack, door, etc.
- (303) Other rear object (specify): _____
- ADAPTIVE (ASSISTIVE) DRIVING EQUIPMENT**
- (401) Hand controls for braking/acceleration
- (402) Steering control devices (attached to OEM steering wheel)
- (403) Steering knob attached to steering wheel
- (405) Replacement steering wheel (i.e., reduced diameter)
- (406) Joy stick steering controls
- (407) Wheelchair tie-downs
- (408) Modification to seat belts, (specify): _____
- (409) Additional or relocated switches, (specify): _____
- (410) Raised roof
- (411) Wall mounted head rest (used behind wheel chair)
- (412) Other adaptive device (specify): _____

CONFIDENCE LEVEL OF CONTACT POINT	
(1)	Certain
(2)	Probable
(3)	Possible
(9)	Unknown

MANUAL RESTRAINTS

NOTES: Encode the applicable data for each seat position in the vehicle. The attribute for the variable may be found below. Restraint systems should be assessed during the vehicle inspection then coded on the Occupant Assessment Form.

If a child safety seat is present, encode the data on the back of this page 11.

If the vehicle has automatic restraints available, encode the appropriate data on page 6.

		Left	Center	Right
F I R S T	A-Availability	3		3
	B-Evidence of usage	03		03
	C-Used in this crash?	03		03
	D-Proper Use	1		1
	E-Failure Modes	1		1
	F-Anchorage Adjustment	0		0
S E C O N D	A-Availability			
	B-Evidence of usage			
	C-Used in this crash?			
	D-Proper Use			
	E-Failure Modes			
	F-Anchorage Adjustment			
O T H E R	A-Availability			
	B-Evidence of usage			
	C-Used in this crash?			
	D-Proper Use			
	E-Failure Modes			
	F-Anchorage Adjustment			

A-Manual (Active) Belt System Availability

- (0) None available
- (1) Belt removed/destroyed
- (2) Shoulder belt
- (3) Lap belt
- (4) Lap and shoulder belt
- (5) Belt available - type unknown

Integral Belt Partially Destroyed

- (6) Shoulder belt (lap belt destroyed/removed)
- (7) Lap belt (shoulder belt destroyed/removed)
- (8) Other belt (specify): _____
- (9) Unknown

B/C-Manual (Active) Belt System Use

- (00) None used, not available, or belt removed/destroyed
- (01) Inoperable (specify): _____

- (02) Shoulder belt
- (03) Lap belt
- (04) Lap and shoulder belt
- (05) Belt used - type unknown
- (06) Other belt used (specify): _____
- (12) Shoulder belt used with child safety seat
- (13) Lap belt used with child safety seat
- (14) Lap and shoulder belt used with child safety seat
- (15) Belt used with child safety seat - type unknown
- (18) Other belt used with child safety seat (specify): _____
- (99) Unknown if belt used

D-Proper Use of Manual (Active) Belts

- (0) None used or not available
- (1) Belt used properly
- (2) Belt used properly with child safety seat

Belt Used Improperly

- (3) Shoulder belt worn under arm
- (4) Shoulder belt worn behind back or seat
- (5) Belt worn around more than one person
- (6) Lap belt worn on abdomen
- (7) Lap belt or lap and shoulder belt used improperly with child safety seat (specify): _____
- (8) Other improper use of manual belt system (specify): _____
- (9) Unknown

E-Manual (Active) Belt Failure Modes During Accident

- (0) No manual belt used or not available
- (1) No manual belt failure(s)
- (2) Torn webbing (stretched webbing not included)
- (3) Broken buckle or latchplate
- (4) Upper anchorage separated
- (5) Other anchorage separated (specify): _____
- (6) Broken retractor
- (7) Combination of above (specify): _____
- (8) Other manual belt failure (specify): _____
- (9) Unknown

F-Shoulder Belt Upper Anchorage Adjustment

- (0) No shoulder belt
- (1) No upper anchorage adjustment for shoulder belt

Adjustable Shoulder Belt Upper Anchorage

- (2) In full up position
- (3) In mid position
- (4) In full down position
- (5) Position unknown
- (9) Unknown if position has adjustable upper anchorage adjustment

AUTOMATIC RESTRAINTS

NOTES: Encode the data for each applicable front seat position. The attribute for the variables may be found below. Restraint systems should be assessed during the vehicle inspection then coded on the Occupant Assessment Form.

AIR BAGS

		Frontal Air Bags--Left Front	Frontal Air Bags-Right Front	Other Air Bag
F I R S T	Availability/Function	1	1	/
	Deployment	1	1	/
	Failure	1	1	/

Air Bag System Availability/Function

- (0) Not equipped/not available
- (1) Air bag
- Non-functional*
- (2) Air bag disconnected (specify): _____
- (3) Air bag not reinstalled
- (9) Unknown

Air Bag System Deployment (This Occupant Position)

- (0) Not equipped/not available
- (1) Deployed during accident (as a result of impact)
- (2) Deployed inadvertently just prior to accident
- (3) Deployed, accident sequence undetermined
- (4) Deployed as a result of a noncollision event during accident sequence (e.g., fire, explosion, electrical)
- (5) Unknown if deployed
- (7) Nondeployed
- (9) Unknown

Are There Indications of Air Bag System Failure? (This Occupant Position)

- (0) Not equipped/not available
- (1) No
- (2) Yes (specify): _____
- (9) Unknown

AUTOMATIC BELTS

		Left	Right
F I R S T	A-Availability/Function	1	1
	B-Use	1	1
	C-Type	2	2
	D-Proper Use	1	1
	E-Failure Modes	1	1

A-Automatic (Passive) Belt System Availability/Function

- (0) Not equipped/not available
- (1) 2 point automatic belts
- (2) 3 point automatic belts
- (3) Automatic belts - type unknown
- Non-functional*
- (4) Automatic belts destroyed or rendered inoperative
- (9) Unknown

D-Proper Use of Automatic (Passive) Belt System

- (0) Not equipped/not available/not used
- (1) Automatic belt used properly
- (2) Automatic belt used properly with child safety seat
- Automatic Belt Used Improperly*
- (3) Automatic shoulder belt worn under arm
- (4) Automatic shoulder belt worn behind back
- (5) Automatic belt worn around more than one person
- (6) Lap portion of automatic belt worn on abdomen
- (7) Automatic lap and shoulder belt or automatic shoulder belt used improperly with child safety seat (specify): _____

E-Automatic (Passive) Belt Failure Modes During Accident

- (0) Not equipped/not available/not in use
- (1) No automatic belt failure(s)
- (2) Torn webbing (stretched webbing not included)
- (3) Broken buckle or latchplate
- (4) Upper anchorage separated
- (5) Other anchorage separated (specify): _____
- (6) Broken retractor
- (7) Combination of above (specify): _____
- (8) Other automatic belt failure (specify): _____
- (9) Unknown

B-Automatic (Passive) Belt System Use

- (0) Not equipped/not available/destroyed or rendered inoperative
- (1) Automatic belt in use
- (2) Automatic belt not in use (manually disconnected, motorized track inoperative)
- (3) Automatic belt use unknown
- (9) Unknown

C-Automatic (Passive) Belt System Type

- (0) Not equipped/not available
- (1) Non-motorized system
- (2) Motorized system
- (9) Unknown

- (8) Other improper use of automatic belt system (specify): _____
- (9) Unknown

FIRST SEAT FRONTAL AIR BAGS

NOTES: Encode the applicable data *for the driver and first seat passenger* in the vehicle. The attribute for the variable may be found below. Restraint systems should be assessed during the vehicle inspection then coded on the Occupant Assessment Form.

	Driver	Passenger
A-Type of air bag?	1	1
B-Flaps open at tear points?	2	2
C-Flaps damaged?	1	1
D-Air bag damaged?	01	01
E-Source of air bag damage	01	01
F-Air bag tethered?	2	1
G-Air bag have vent ports?	2	2
H-Other occupant contact air bag?	1	1
I-Occupant wearing eyewear?	1	1

A-Type of Air Bag

- (0) Not equipped/not available
- (1) Original manufacturer installed system
- (2) Retrofitted air bag
- (3) Replacement air bag
- (8) Unknown type of air bag
- (9) Unknown

B-Did Air Bag Module Cover Flap(s) Open At Designated Tear Points?

- (0) Not equipped/not available
- (1) No
- (2) Yes
- (3) Deployed, unknown if flap(s) opened at designated tear points
- (7) Not deployed
- (8) Unknown if deployed
- (9) Unknown

C-Were Air Bag Module Cover Flap(s) Damaged?

- (0) Not equipped/not available
- (1) No
- (2) Yes (specify):
- (3) Deployed, unknown if air bag module cover flap(s) damaged
- (7) Not deployed
- (8) Unknown if deployed
- (9) Unknown

D-Was There Damage To The Air Bag?

- (00) Not equipped/not available
- (01) Not damaged

Yes - Air Bag Damage

- (02) Ruptured
- (03) Cut
- (04) Torn
- (05) Holed
- (06) Burned
- (07) Abraded
- (88) Other damage (specify):

- (95) Damaged, details unknown
- (96) Deployed, unknown if damaged
- (97) Not deployed
- (98) Unknown if deployed
- (99) Unknown

E-Source of Air Bag Damage

- (00) Not equipped/not available
- (01) Not damaged
- (02) Object worn by occupant, (specify):
- (03) Object carried by occupant, (specify):
- (04) Adaptive/assistive controls, (specify):
- (05) Fire in vehicle
- (06) Thermal burns
- (07) Rescue or emergency efforts
- (88) Other damage source (specify):

- (95) Damaged, unknown source
- (96) Deployed, unknown if damaged
- (97) Not deployed
- (98) Unknown if deployed
- (99) Unknown

F-Was The Air Bag Tethered?

- (0) Not equipped/not available
- (1) No
- (2) Yes (specify number of tether straps): 4 driver
- (3) Deployed, unknown if tethered
- (7) Not deployed
- (8) Unknown if deployed
- (9) Unknown

G-Did The Air Bag Have Vent Ports?

- (0) Not equipped/not available
- (1) No
- (2) Yes (specify number of vent ports): 2 driver & Pass.
- (3) Deployed, unknown if vent ports present
- (7) Not deployed
- (8) Unknown if deployed
- (9) Unknown

H-Was the Air Bag in this Occupant's Position Contacted by Another Occupant?


- (0) Not equipped/not available
- (1) No
- (2) Yes (specify):
- (3) Deployed, unknown if other occupant contact to air bag
- (7) Not deployed
- (8) Unknown if deployed
- (9) Unknown

I-Was This Occupant Wearing Eye-wear?


- (0) Not equipped/not available
- (1) No
- (2) Eyeglasses/sunglasses
- (3) Contact lenses
- (4) Deployed, unknown if eyewear worn
- (7) Not deployed
- (8) Unknown if deployed
- (9) Unknown

DRIVER AIR BAG DAMAGE AND CONTACT SKETCHES

1. SKETCH DAMAGE AND CONTACT EVIDENCE ON DRIVER AIR BAG (Front)

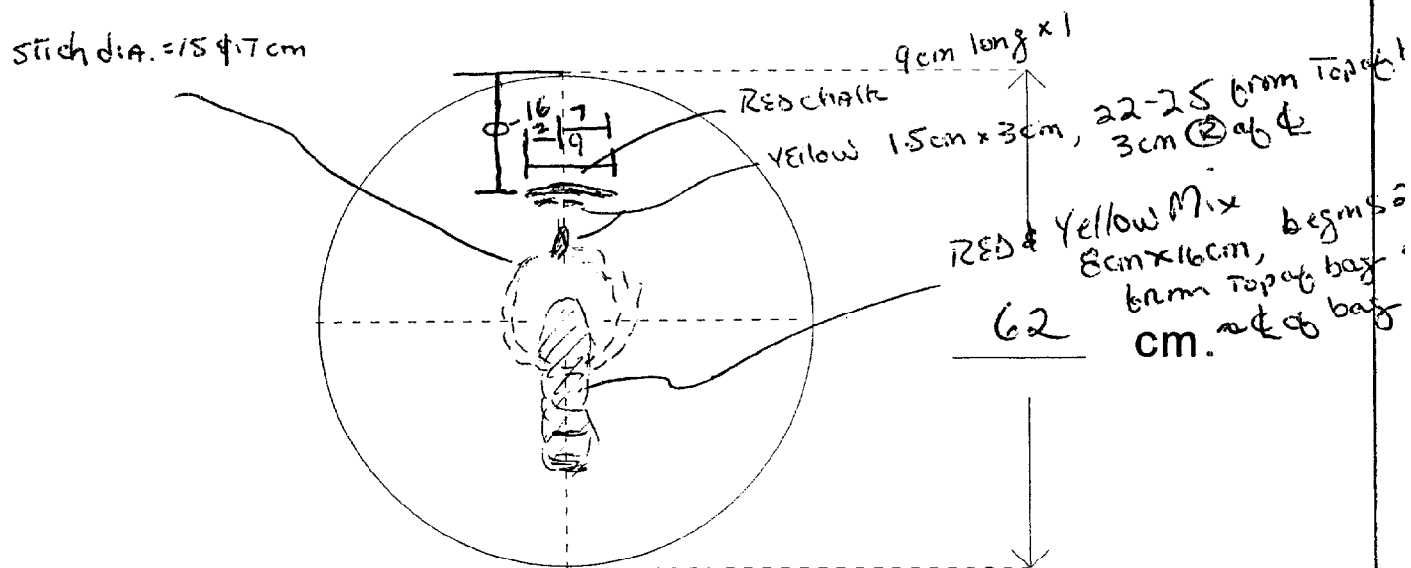


2. SKETCH DAMAGE AND CONTACT EVIDENCE ON DRIVER AIR BAG (Back)

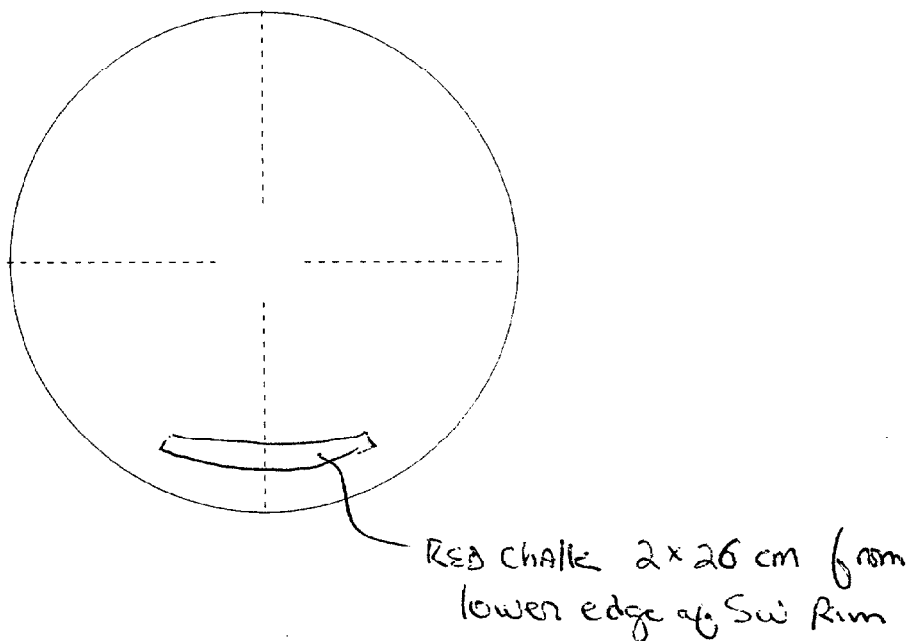

DRIVER AIR BAG SKETCHES (Cont'd)

3. DRIVER AIR BAG MODULE COVER FLAP SIZE (SINGLE)


width (W_u) _____ width (W_l) _____
 height (H) _____




4. DRIVER AIR BAG MODULE COVER FLAP SIZE (DOUBLE)

a. Upper Flap b. Lower Flap

width (W_u) _____ width (W_l) _____
 height (H_u) _____ height (H_l) _____




5. SKETCH OF OTHER TYPE OF AIR BAG MODULE FLAP AND SIZE

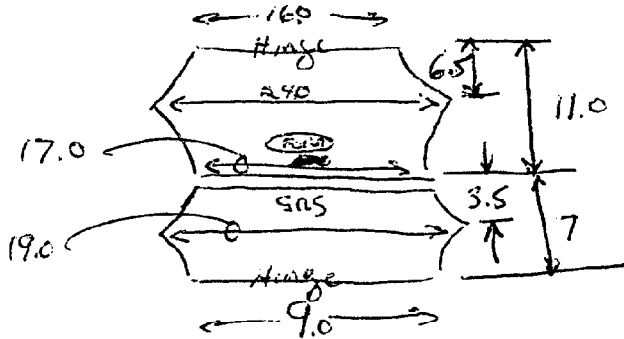


6. SKETCH OF OTHER TYPE OF AIR BAG VENT PORTS

7. SKETCH LOCATION OF CIRCULAR AIR BAG VENT PORTS




PASSENGER AIR BAG DAMAGE AND CONTACT SKETCHES

1. SKETCH DAMAGE AND CONTACT EVIDENCE ON PASSENGER AIR BAG (Front)

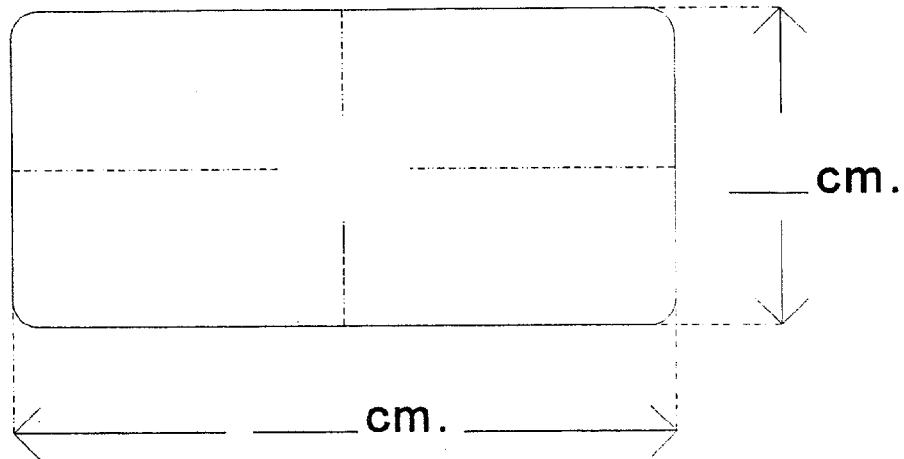

2. SKETCH DAMAGE AND CONTACT EVIDENCE ON PASSENGER AIR BAG (Back)

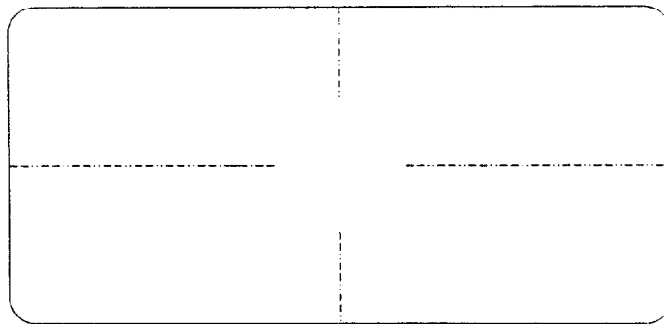


PASSENGER AIR BAG SKETCHES (Cont'd)

3. PASSENGER AIR BAG MODULE COVER FLAP SIZE (SINGLE)

width (W) _____

height (H) _____



4. PASSENGER AIR BAG MODULE COVER FLAP SIZE (DOUBLE)

a. Upper Flap


b. Lower Flap

width (W_u) _____

width (W_l) _____

height (H_u) _____


height (H_l) _____



5. SKETCH OF OTHER TYPE OF AIR BAG MODULE FLAP AND SIZE


6. SKETCH OF OTHER TYPE OF AIR BAG VENT PORTS

7. SKETCH LOCATION OF RECTANGULAR AIR BAG VENT PORTS

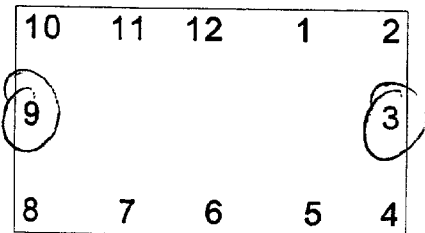


"OTHER" AIR BAG SKETCHES (Cont'd)

3. SKETCH AIR BAG MODULE FLAP AND SIZE OR OPENING FOR AIRBAG

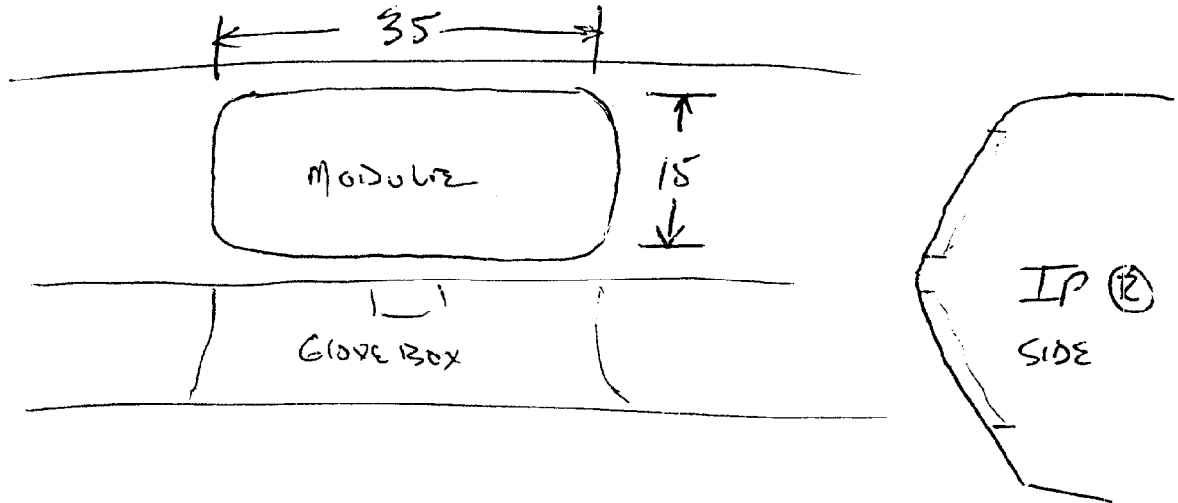

4. SKETCH AIR BAG VENT PORTS

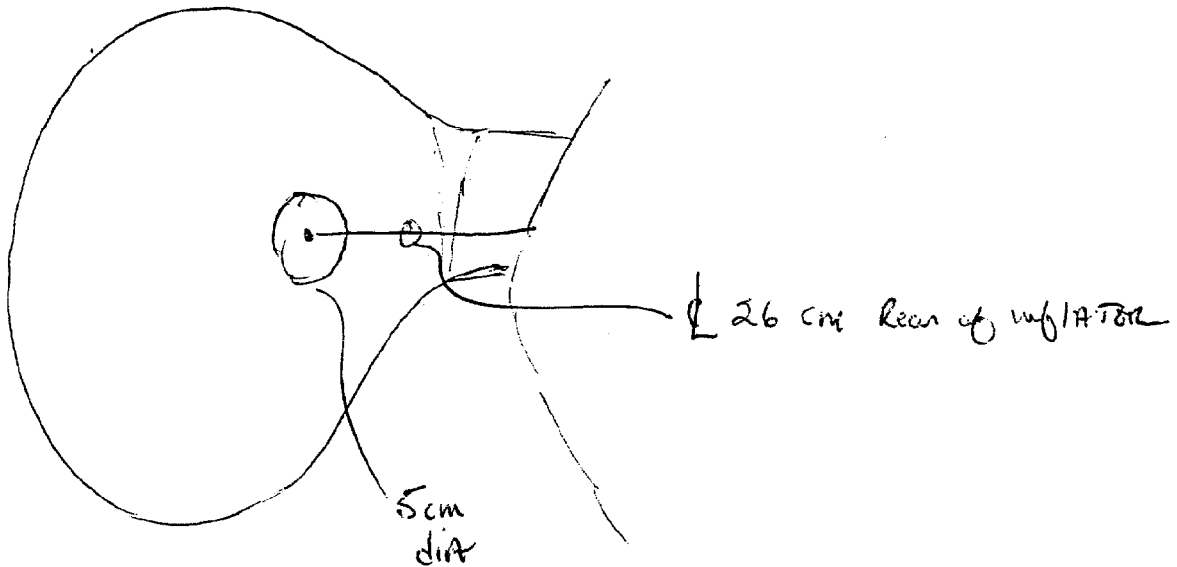

HEAD RESTRAINTS/SEAT EVALUATION

NOTES: Encode the applicable data for each seat position in the vehicle. The attribute for these variables may be found on the next page. Head restraint type/damage and seat type/performance should be assessed during the vehicle inspection then coded on the Occupant Assessment Form.

		Left	Center	Right
FIRST	A-Head Restraint Type/Damage	3	}	3
	B-Seat Type	01		01
	C-Seat Orientation	1		1
	D-Seat Track Position	6		3
	E-Seat Back Incline Pre/Post Impact	14		14
	F-Seat Performance	1		1
SECOND	A-Head Restraint Type/Damage	}	}	}
	B-Seat Type			
	C-Seat Orientation			
	D-Seat Track Position			
	E-Seat Back Incline Pre/Post Impact			
	F-Seat Performance			
THIRD	A-Head Restraint Type/Damage	}	}	}
	B-Seat Type			
	C-Seat Orientation			
	D-Seat Track Position			
	E-Seat Back Incline Pre/Post Impact			
	F-Seat Performance			
OTHER	A-Head Restraint Type/Damage	}	}	}
	B-Seat Type			
	C-Seat Orientation			
	D-Seat Track Position			
	E-Seat Back Incline Pre/Post Impact			
	F-Seat Performance			

**DESCRIBE ANY INDICATION OF ABNORMAL OCCUPANT POSTURE
(I.E., UNUSUAL OCCUPANT CONTACT PATTERN)**

HEAD RESTRAINTS/SEAT EVALUATION

A-Head Restraint Type/Damage by Occupant at This Occupant Position

- (0) No head restraints
- (1) Integral — no damage
- (2) Integral — damaged during accident
- (3) Adjustable — no damage
- (4) Adjustable — damaged during accident
- (5) Add-on — no damage
- (6) Add-on — damaged during accident
- (8) Other (specify): _____
- (9) Unknown

B-Seat Type (this Occupant Position)

- (00) Occupant not seated or no seat
- (01) Bucket
- (02) Bucket with folding back
- (03) Bench
- (04) Bench with separate back cushions
- (05) Bench with folding back(s)
- (06) Split bench with separate back cushions
- (07) Split bench with folding back(s)
- (08) Pedestal (i.e., column supported)
- (09) Box mounted seat (i.e., van type)
- (10) Other seat type (specify): _____
- (99) Unknown

C-Seat Orientation (this Occupant Position)

- (0) Occupant not seated or no seat
- (1) Forward facing seat
- (2) Rear facing seat
- (3) Side facing seat (inward)
- (4) Side facing seat (outward)
- (8) Other (specify): _____
- (9) Unknown

D-Seat Track Adjusted Position Prior To Impact

- (0) Occupant not seated or no seat
- (1) Non-adjustable seat track

Adjustable Seat Track

- (2) Seat at forward most track position
- (3) Seat between forward most and middle track positions
- (4) Seat at middle track position
- (5) Seat between middle and rear most track positions
- (6) Seat at rear most track position
- (9) Unknown

E-Seat Back Incline Prior and Post Impact

- (00) Occupant not seated or no seat
- (01) Not adjustable

Upright prior to impact

- (11) Moved to completely rearward position
- (12) Moved to rearward midrange position
- (13) Moved to slightly rearward position
- (14) Retained pre-impact position
- (15) Moved to slightly forward position
- (16) Moved to forward midrange position
- (17) Moved to completely forward position

Slightly reclined prior to impact

- (21) Moved to completely rearward position
- (22) Moved to rearward midrange position
- (23) Retained pre-impact position
- (24) Moved to upright position
- (25) Moved to slightly forward position
- (26) Moved to forward midrange position
- (27) Moved to completely forward position




Completely reclined prior to impact

- (31) Retained pre-impact position
- (32) Moved to rearward midrange position
- (33) Moved to slightly rearward position
- (34) Moved to upright position
- (35) Moved to slightly forward position
- (36) Moved to forward midrange position
- (37) Moved to completely forward position

- (99) Unknown

F-Seat Performance (this Occupant Position)

- (0) Occupant not seated or no seat
- (1) No seat performance failure(s)
- (2) Seat adjusters failed
- (3) Seat back folding locks or "seat back" failed (specify): _____
- (4) Seat tracks/anchors failed
- (5) Deformed by impact of occupant
- (6) Deformed by passenger compartment intrusion (specify): _____
- (7) Combination of above (specify): _____
- (8) Other (specify): _____
- (9) Unknown



Coding diagrams for *Seat Back Incline Position Prior and Post Impact*

DESCRIBE ANY INDICATION OF ABNORMAL OCCUPANT POSTURE (I.E., UNUSUAL OCCUPANT CONTACT PATTERN)

EJECTION/ENTRAPMENT DATA

Complete the following if the researcher has any indication that an occupant was either ejected from or entrapped in the vehicle. Code the appropriate data on the Occupant Assessment Form.

EJECTION No Yes

Describe indications of ejection and body parts involved in partial ejection(s):

Occupant Number						
Ejection						
(Note on Vehicle Interior Sketch) Ejection Area						
Ejection Medium						
Medium Status						

Ejection

- (1) Complete ejection
- (2) Partial ejection
- (3) Ejection, Unknown degree
- (9) Unknown

Ejection Area

- (1) Windshield
- (2) Left front
- (3) Right front
- (4) Left rear
- (5) Right rear
- (6) Rear

(7) Roof

- (8) Other area (e.g., back of pickup, etc.) (specify): _____

(9) Unknown

Ejection Medium

- (1) Door/hatch/tailgate
- (2) Nonfixed roof structure
- (3) Fixed glazing
- (4) Nonfixed glazing (specify): _____

(5) Integral structure

- (8) Other medium (specify): _____

(9) Unknown

Medium Status (Immediately Prior to Impact)

- (1) Open
- (2) Closed
- (3) Integral structure
- (9) Unknown

ENTRAPMENT No Yes

Describe entrapment mechanism: _____

Component(s): _____

(Note on vehicle interior sketch)




INTERIOR VEHICLE LOG

TO BE COMPLETED BY TEAM	DATA STATUS OF VARIABLE NUMBERS 4-97																																																																																																					
<p>1. PSU Number _____</p> <p>2. Case Number—Stratum _____</p> <p>3. Researcher Completing Form _____</p> <p>4. Vehicle Number <u>01</u></p> <p>5. Number of Interior Vehicle Slides _____</p>	<p>Integrity</p> <p>4 5 6 7 8 9 10 11 12 13 14</p> <table border="1" style="width:100%; height: 20px;"> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </table> <p>Glazing</p> <p>15 16 17 18 19 20 21 22 23 24 25</p> <table border="1" style="width:100%; height: 20px;"> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </table> <p>26 27 28 29 30 31 32 33 34 35 36</p> <table border="1" style="width:100%; height: 20px;"> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </table> <p>37 38 39 40 41 42 43 44 45 46</p> <table border="1" style="width:100%; height: 20px;"> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </table> <p>Intrusion</p> <p>47 48 49 50 51 52 53 54 55 56 57</p> <table border="1" style="width:100%; height: 20px;"> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </table> <p>58 59 60 61 62 63 64 65 66 67 68</p> <table border="1" style="width:100%; height: 20px;"> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </table> <p>69 70 71 72 73 74 75 76 77 78 79</p> <table border="1" style="width:100%; height: 20px;"> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </table> <p>80 81 82 83 84 85 86</p> <table border="1" style="width:100%; height: 20px;"> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </table> <p>Steering Column/Wheel and Instrument Panel</p> <p>87 88 89 90 91 92 93 94 95 96 97</p> <table border="1" style="width:100%; height: 20px;"> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </table> <p>Data Status Codes:</p> <p>(Blank) Correct (1) Derived error (2) Non-correctable error (3) Correctable error (4) Change—no error (5) Sequencing error (7) Incorrect edit override (8) MDE error (9) Unknown coded</p>																																																																																																					
TO BE COMPLETED BY ZONE CENTER																																																																																																						
<p>6. Documentation Of Integrity _____</p> <p>7. Documentation Of Glazing _____</p> <p>8. Documentation of Intrusions _____</p> <p>9. Documentation of Steering Column/Wheel _____</p> <p>10. Documentation of Occupant Contacts _____</p> <p>11. Documentation of Seat Belt Type/Availability/Usage _____</p> <p>12. Documentation of Air Bag Type/Availability/Deployment _____</p> <p>13. Documentation of Seats _____</p> <p>14. Documentation of Ejection/Entrapment _____</p> <p>15. Interior Slides Subject Quality _____</p> <p>16. Interior Slides Quality _____</p> <p>Codes For Log Variables 6-16 (0) Not applicable (1) Substandard - beyond researcher control (2) Substandard (3) Standard</p> <p>17. Number of Coded Intrusions _____</p>																																																																																																						

VEHICLE DAMAGE SKETCH

<p>TIRE—WHEEL DAMAGE</p> <p>a. Rotation physically restricted</p> <p>RF <u>2</u> LF <u>1</u> RR <u>1</u> LR <u>1</u></p> <p>b. Tire deflated</p> <p>RF <u>2</u> LF <u>1</u> RR <u>1</u> LR <u>1</u></p> <p>(1) Yes (2) No (8) NA (9) Unk.</p>	<p>ORIGINAL SPECIFICATIONS</p> <p>Wheelbase <u>273</u> cm</p> <p>Overall Length <u>492</u> cm</p> <p>Maximum Width <u>180</u> cm</p> <p>Curb Weight <u>1533</u> kg</p> <p>Average Track <u>149</u> cm</p> <p>Front Overhang <u>104</u> cm</p> <p>Rear Overhang <u>105</u> cm</p> <p>Undeformed End Width _____ cm</p> <p>Engine Size: cyl./displ. _____ L</p>	<p>WHEEL STEER ANGLES (For locked front wheels or displaced rear axles only)</p> <p>RF ± _____ ° LF ± _____ ° RR ± _____ ° LR ± _____ °</p> <p>Within ± 5 degrees</p>
<p>TYPE OF TRANSMISSION</p> <p><input type="checkbox"/> Manual <input checked="" type="checkbox"/> Automatic</p> <p>END SHIFT ≥ 10 CM</p> <p><input type="checkbox"/> Yes <input checked="" type="checkbox"/> No</p>	<p>DRIVE WHEELS</p> <p><input checked="" type="checkbox"/> FWD <input type="checkbox"/> RWD <input type="checkbox"/> 4WD</p> <p>Approximate Cargo Weight <u>0</u> kg</p>	

MEASUREMENTS IN CENTIMETERS

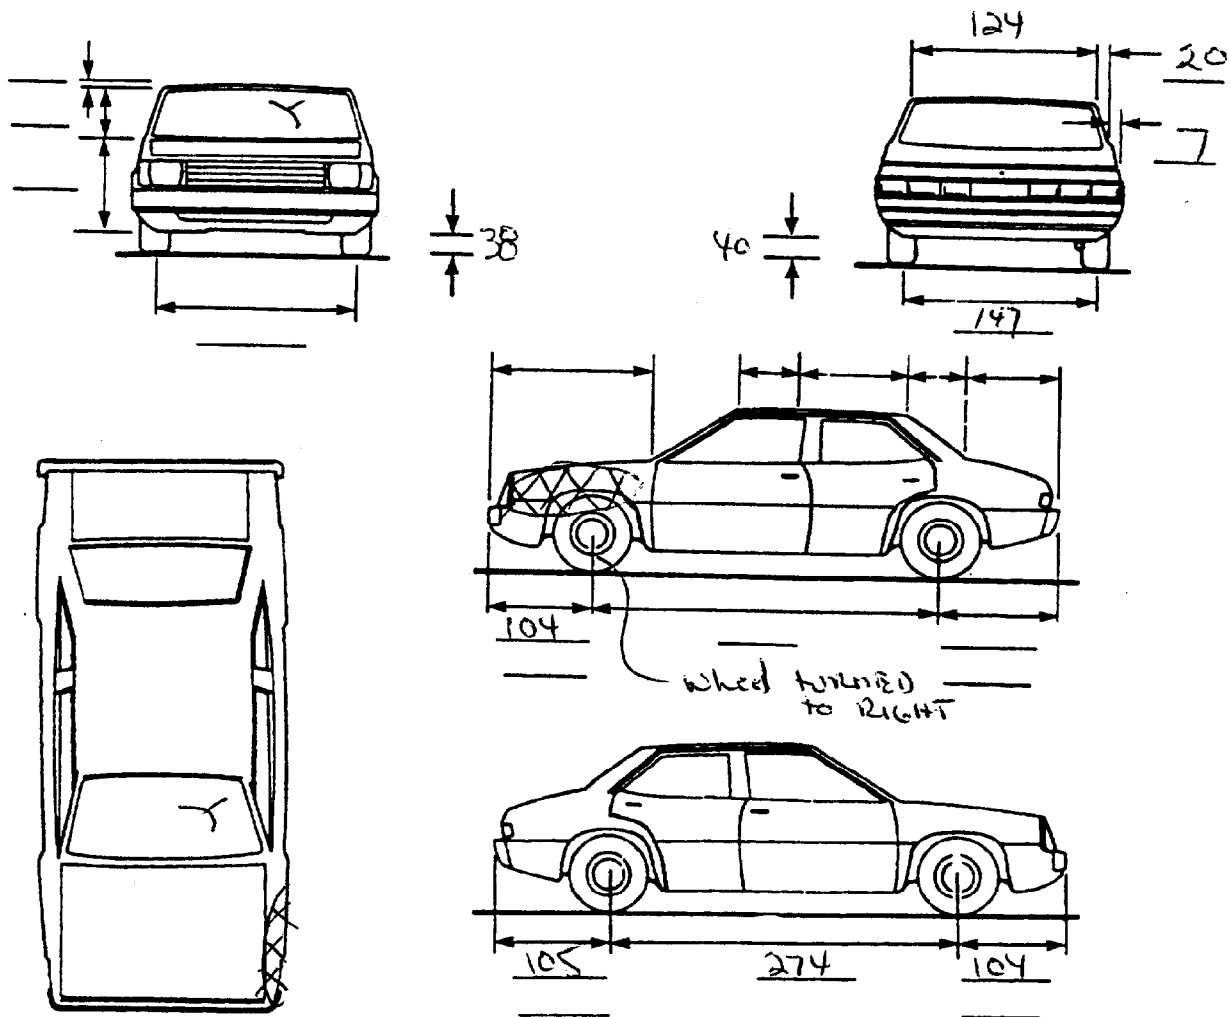

NOTES: Sketch new perimeter and cross hatch direct damage and single hatch induced damage on all views. Annotate observations which might be useful in reconstructing the accident (e.g., grass in tire bead, direction of striations, scuff on sidewalls, etc.). If pulling trailer, sketch type of trailer and damage received on the back of this page.

Annotate any damage caused by extrication such as component removal by torching, prying, or hydraulic shears.

COLLISION DEFORMATION CLASSIFICATION

HIGHEST DELTA "V"

Accident Event Sequence Number	Object Contacted	(1) (2) Direction of Force	(3) Deformation Location	(4) Longitudinal or Lateral Location	(5) Vertical or Lateral Location	(6) Type of Damage Distribution	(7) Deformation Extent
4. <u>01</u>	5. <u>01</u>	6. <u>09</u>	7. <u>L</u>	8. <u>F</u>	9. <u>M</u>	10. <u>W</u>	11. <u>02</u>

Second Highest Delta "V"

12. _____ 13. _____ 14. _____ 15. _____ 16. _____ 17. _____ 18. _____ 19. _____

CRUSH PROFILE IN CENTIMETERS

The crush profile for the damage described in the CDC(s) above should be documented in the appropriate space below. (ALL MEASUREMENTS ARE IN CENTIMETERS.)

HIGHEST DELTA "V"

20. L	21. C ₁	C ₂	C ₃	C ₄	C ₅	C ₆	22. ±D
<u>95</u>	<u>0</u>	<u>1.5</u>	<u>10.0</u>	<u>5.5</u>	<u>3.0</u>	<u>0</u>	<u>167</u>

Second Highest Delta "V"

23. L	24. C ₁	C ₂	C ₃	C ₄	C ₅	C ₆	25. ±D
_____	_____	_____	_____	_____	_____	_____	_____

26. Undeformed End Width
(Coded when highest severity impact is an end plane impact.)
Code to the nearest centimeter
(250) 250 centimeters or more
(998) No highest severity end plane impact
(999) Unknown

998

27. Direct Damage Width
(For highest severity impact)
Code to the nearest centimeter
(250) 250 centimeters or more
(999) Unknown

095

28. Original Wheelbase
Code to the nearest centimeter
(650) 650 centimeters or more
(999) Unknown
_____ inches X 2.54 = _____ centimeters

273

29. Original Average Track Width
Code to the nearest centimeter
(185) 185 centimeters or more
(999) Unknown
_____ inches X 2.54 = _____ centimeters

149

30. Are CDCs Documented but Not Coded on The Automated File? 1
 (0) No
 (1) Yes

31. Researcher's Assessment of Vehicle Disposition 1
 (0) Not towed due to vehicle damage
 (1) Towed due to vehicle damage
 (9) Unknown

32. Is This A Multi-Stage Manufactured Vehicle And/Or A Certified Altered Vehicle? 0
 (0) No post manufacturer modifications
 (1) Yes - post manufacturer modifications (specify): _____

 (Include photograph of CERTIFICATION PLACARD in case report)
 (9) Unknown if vehicle is modified

FUEL SYSTEM

35. Location of Fuel Tank-1 Filler Cap 2

36. Location of Fuel Tank-2 Filler Cap 0
 (0) No fuel tank
 (1) On back plane
 (2) Aft of center of the rear wheels (rear axle) on left side plane
 (3) Aft of center of the rear wheels (rear axle) on right side plane
 (4) Forward of center of the rear wheels (rear axle) on left side plane
 (5) Forward of center of the rear wheels (rear axle) on right side plane
 (6) Over the center of the rear wheels (rear axle) on left side plane
 (7) Over the center of the rear wheels (rear axle) on right side plane
 (8) Other (specify): _____
 (9) Unknown

37. Type of Fuel Tank-1 1

38. Type of Fuel Tank-2 0
 (0) No fuel tank (electrical vehicle)
 (1) Metallic
 (2) Non-metallic
 (9) Unknown

FIRE OCCURRENCE

33. Fire Occurrence 0
 (0) No fire
 Yes, fire occurred
 (1) Minor
 (2) Major
 (9) Unknown

34. Origin of Fire 0
 (0) No fire
 (1) Vehicle exterior (front, side, back, top)
 (2) Exhaust system
 (3) Fuel tank (and other fuel retention system parts)
 (4) Engine compartment
 (5) Cargo/trunk compartment
 (6) Instrument panel
 (7) Passenger compartment area
 (8) Other location (specify): _____
 (9) Unknown

39. Location of Fuel Tank-1 4

40. Location of Fuel Tank-2 0
 (0) No fuel tank
 (1) Aft of center of the rear wheels (rear axle) centered
 (2) Aft of center of the rear wheels (rear axle) left side
 (3) Aft of center of the rear wheels (rear axle) right side
 (4) Forward of center of the rear wheels (rear axle) centered
 (5) Forward of center of the rear wheels (rear axle) left side
 (6) Forward of center of the rear wheels (rear axle) right side
 (7) Over center of the rear wheels (rear axle)
 (8) Other (specify): _____
 (9) Unknown

41. Damage to Fuel Tank-1 1

42. Damage to Fuel Tank-2 0
 (0) No fuel tank
 (1) No damage to fuel tank
 (2) Deformed, no seam failure
 (3) Deformed, with a seam failure
 (4) Punctured
 (5) Lacerated (ripped)
 (6) Abraded (scraped)
 (7) Filler neck separation from the fuel tank
 (8) Other damage (specify): _____
 (9) Unknown

<p>43. Leakage Location of Fuel System-1 <u>1</u></p> <p>44. Leakage Location of Fuel System-2 <u>0</u></p> <p style="margin-left: 20px;">(0) No fuel tank (1) No fuel leakage</p> <p><i>Primary Area Of Leakage</i></p> <p style="margin-left: 20px;">(2) Tank (3) Filler neck (4) Cap (5) Lines/pump/filter (6) Vent/emission recovery (8) Other (specify): _____ (9) Unknown</p> <p>45. Fuel Type-1 <u>0 1</u></p> <p>46. Fuel Type-2 <u>0 0</u></p> <p><i>Single Fuel Type</i></p> <p style="margin-left: 20px;">(00) No fuel tank (01) Gasoline (02) Diesel (03) CNG (Compressed Natural Gas) (04) LPG (Liquid Petroleum Gas) also known as Propane (05) LNG (Liquid Natural Gas) (06) Methanol (M100 or M85) (07) Ethanol (E100 or E85) (08) Other (Hydrogen or others) (specify): _____</p> <p><i>Electric Powered or Electric/Solar Powered Vehicles</i></p> <p style="margin-left: 20px;">(10) Lead Acid Battery (11) Nickel-Iron Battery (12) Nickel-Cadmium Battery (13) Sodium Metal Chloride Battery (14) Sodium Sulfur Battery (18) Other (Specify): _____</p> <p style="margin-left: 20px;">(98) Other Hybrid (specify): _____</p> <p style="margin-left: 20px;">(99) Unknown fuel type</p>	<p>47. Is This Vehicle Equipped With More Than Two Fuel Tanks? <u>0</u></p> <p style="margin-left: 20px;">(0) No (one or two tanks only)</p> <p><i>Yes - More Than Two Tanks</i></p> <p style="margin-left: 20px;">(1) Yes -- <u>no damage</u> to any tank or filler cap and <u>no fuel system leakage</u></p> <p style="margin-left: 20px;">(2) Yes -- <u>no damage</u> to any tank or filler cap but <u>there is fuel system leakage</u> (specify leakage location): _____</p> <p style="margin-left: 20px;">(3) Yes -- <u>damage</u> to an additional tank or filler cap and <u>there is fuel system leakage</u> (specify the following): Type of tank _____ Tank location _____ Filler cap location _____ Tank damage _____ Location of leakage _____ Type of fuel _____</p> <p style="margin-left: 20px;">(9) Unknown if more than two tanks</p>
<p>COMMENTS</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p>	

*** STOP: IF THE CDS APPLICABLE VEHICLE WAS NOT TOWED ***

(GV10=0)

DO NOT COMPLETE THE INTERIOR VEHICLE FORM.



EXTERIOR VEHICLE LOG

TO BE COMPLETED BY TEAM																																																																																									
1. PSU Number _____	14. Number of Coded CDCs (0,1,2) _____																																																																																								
2. Case Number—Stratum _____	15. Number of Coded Crush Profiles (0,1,2) _____																																																																																								
3. Researcher Completing Form _____																																																																																									
4. Vehicle Number <u>02</u>																																																																																									
5. Date Vehicle Inspected <u>08/19/97</u>																																																																																									
6. Number of Exterior Vehicle Slides _____																																																																																									
TO BE COMPLETED BY ZONE CENTER																																																																																									
7. Applicable Precrash Measurements _____ (0) Not applicable (1) Substandard - beyond researcher control (2) Substandard (3) Standard	<p style="text-align: center;">DATA STATUS OF VARIABLE NUMBERS 4-47</p> <p>Highest CDC</p> <table style="width: 100%; text-align: center; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; width: 20px;">4</td> <td style="border: 1px solid black; width: 20px;">5</td> <td style="border: 1px solid black; width: 20px;">6</td> <td style="border: 1px solid black; width: 20px;">7</td> <td style="border: 1px solid black; width: 20px;">8</td> <td style="border: 1px solid black; width: 20px;">9</td> <td style="border: 1px solid black; width: 20px;">10</td> <td style="border: 1px solid black; width: 20px;">11</td> </tr> <tr> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> </tr> </table> <p>Secondary CDC</p> <table style="width: 100%; text-align: center; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; width: 20px;">12</td> <td style="border: 1px solid black; width: 20px;">13</td> <td style="border: 1px solid black; width: 20px;">14</td> <td style="border: 1px solid black; width: 20px;">15</td> <td style="border: 1px solid black; width: 20px;">16</td> <td style="border: 1px solid black; width: 20px;">17</td> <td style="border: 1px solid black; width: 20px;">18</td> <td style="border: 1px solid black; width: 20px;">19</td> </tr> <tr> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> </tr> </table> <p>Highest Crush Profile</p> <table style="width: 100%; text-align: center; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; width: 20px;">20</td> <td style="border: 1px solid black; width: 20px;">21</td> <td style="border: 1px solid black; width: 20px;">22</td> </tr> <tr> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> </tr> </table> <p>Secondary Crush Profile</p> <table style="width: 100%; text-align: center; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; width: 20px;">23</td> <td style="border: 1px solid black; width: 20px;">24</td> <td style="border: 1px solid black; width: 20px;">25</td> </tr> <tr> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> </tr> </table> <table style="width: 100%; text-align: center; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; width: 20px;">26</td> <td style="border: 1px solid black; width: 20px;">27</td> <td style="border: 1px solid black; width: 20px;">28</td> <td style="border: 1px solid black; width: 20px;">29</td> <td style="border: 1px solid black; width: 20px;">30</td> <td style="border: 1px solid black; width: 20px;">31</td> <td style="border: 1px solid black; width: 20px;">32</td> <td style="border: 1px solid black; width: 20px;">33</td> <td style="border: 1px solid black; width: 20px;">34</td> <td style="border: 1px solid black; width: 20px;">35</td> <td style="border: 1px solid black; width: 20px;">36</td> </tr> <tr> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> </tr> </table> <table style="width: 100%; text-align: center; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; width: 20px;">37</td> <td style="border: 1px solid black; width: 20px;">38</td> <td style="border: 1px solid black; width: 20px;">39</td> <td style="border: 1px solid black; width: 20px;">40</td> <td style="border: 1px solid black; width: 20px;">41</td> <td style="border: 1px solid black; width: 20px;">42</td> <td style="border: 1px solid black; width: 20px;">43</td> <td style="border: 1px solid black; width: 20px;">44</td> <td style="border: 1px solid black; width: 20px;">45</td> <td style="border: 1px solid black; width: 20px;">46</td> <td style="border: 1px solid black; width: 20px;">47</td> </tr> <tr> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> <td style="border: 1px solid black; height: 20px;"></td> </tr> </table> <p>Data Status Codes:</p> <ul style="list-style-type: none"> (Blank) Correct (1) Derived error (2) Non-correctable error (3) Correctable error (4) Change—no error (5) Sequencing error (7) Incorrect edit override (8) MDE error (9) Unknown coded 	4	5	6	7	8	9	10	11									12	13	14	15	16	17	18	19									20	21	22				23	24	25				26	27	28	29	30	31	32	33	34	35	36												37	38	39	40	41	42	43	44	45	46	47											
4	5	6	7	8	9	10	11																																																																																		
12	13	14	15	16	17	18	19																																																																																		
20	21	22																																																																																							
23	24	25																																																																																							
26	27	28	29	30	31	32	33	34	35	36																																																																															
37	38	39	40	41	42	43	44	45	46	47																																																																															
8. Reference Line Placement _____ (0) Not applicable (e.g. rollover) (1) Substandard - beyond researcher control (2) Substandard (3) Standard																																																																																									
9. Impact Damage Documentation _____ (0) Not applicable (1) Substandard - beyond researcher control (2) Substandard (3) Standard																																																																																									
10. Quality Of Vehicle Damage Sketch _____ (0) Not applicable (e.g., repaired vehicle) (1) Substandard - beyond researcher control (2) Substandard (3) Standard																																																																																									
11. Exterior Slides Subject Quality _____ (0) Not applicable (1) Substandard - beyond researcher control (2) Substandard (3) Standard																																																																																									
12. Exterior Slides Quality _____ (0) Not applicable (1) Substandard - beyond researcher control (2) Substandard (3) Standard																																																																																									
13. Primary Error Source (Vehicle Plane) _____ (0) No error (1) Front (2) Side (left or right) (3) Back (rear) (4) Top (5) Undercarriage (8) Other (specify): _____																																																																																									

IF THIS VEHICLE WAS NOT TOWED (I.E., GV09 ≠ 1), DO NOT COMPLETE THE INTERIOR VEHICLE LOG