

REPORT NUMBER KAR21001-10

**NEW CAR ASSESSMENT PROGRAM
FRONTAL BARRIER IMPACT TEST**

**DAIMLER CHRYSLER
2001 DODGE DAKOTA SPORT
QUAD CAB PICKUP
NHTSA NUMBER: M10303**

**PREPARED BY:
KARCO ENGINEERING
9270 HOLLY ROAD
ADELANTO, CALIFORNIA 92301**



MARCH 9, 2001

FINAL REPORT

**PREPARED FOR:
U.S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
SAFETY PERFORMANCE STANDARDS
OFFICE OF CRASHWORTHINESS STANDARDS
MAIL CODE: NPS-10
400 SEVENTH STREET, SW, ROOM 5313
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Safety Administration, in response to Contract Number DTNH22-97-D-02007.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: _____ Date: March 9, 2001
Mr. James E. Gorth, Project Engineer
KARCO Engineering

Reviewed by: _____ Date: March 9, 2001
Mr. Jerry L. Kratzke, Director of Operations
KARCO Engineering

Approved by: _____ Date: March 9, 2001
Mr. Frank D. Richardson, Program Manager
KARCO Engineering

FINAL REPORT ACCEPTED BY:

Manager, New Car Assessment Program

Date of Acceptance

COTR, NCAP Frontal Impact Program

Date of Acceptance

Technical Report Documentation Page

1. Report No. KAR21001-10		2. Government Accession No.		3. Recipients Catalog No.	
4. Title and Subtitle Final Report of New Car Assessment Program Testing of a 2001 Dodge Dakota Sport Quad Cab NHTSA No. M10303				5. Report Date March 9, 2001	
				6. Performing Organization Code KAR	
7. Author(s) Mr. James E Gorth, Project Engineer, Karco Mr. Frank Richardson, Project Manager, Karco				8. Performing Organization Report No. KAR21001-10	
				10. Work Unit No.	
9. Performing Organization Name and Address KARCO Engineering 9270 Holly Road Adelanto, CA 92301				11. Contract or Grant No. DTNH22-97-D-02007	
				13. Type of Report and Period Covered Final Test Report Option Year 4	
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Safety Performance Standards Office of Crashworthiness Standards Mail Code: NPS-10 400 Seventh Street, SW, Room 5313 Washington, D.C. 20590				14. Sponsoring Agency Code DOT/NHTSA/NRM/OCS	
				15. Supplementary Notes	
16. Abstract A 35 mph (56.3 km/h) frontal barrier impact was conducted on a 2001 Dodge Dakota Sport Quad Cab at KARCO Engineering on 2/13/01. This test was conducted to obtain data indicant of FMVSS 208, 212, 219 (partial), 301, and footwell intrusion performance. The impact velocity is 55.82 km/h. The ambient temperature at the barrier face at the time of impact is 10.5 degrees Celcius. The vehicle's maximum post test static crush is 622 mm at the vehicle centerline. The test vehicle is equipped with a 3-point continuous belt system and second generation supplemental airbags in both front outboard seating positions. With respect to FMVSS 208 "Occupant Crash Protection", the occupant injury criteria summary is as follows:					
Measurement Description		Units	Threshold	Driver ATD	Passenger ATD
Head Injury Criteria (HIC)		N/A	1000	747.3	568.9
Max. Thorax Accel. (3 msec Clip)		G's	60	51.9	42.0
Left Femur force		Newtons	10009	-6053.5	-7549.5
Right Femur Force		Newtons	10009	-4855.5	-5777.5
17. Key Words 56.3 km/h NCAP Frontal Barrier Impact Test New Car Assessment Program (NCAP) 2001 Dodge Dakota Sport Quad Cab NHTSA No. M10303				18. Distribution Statement Copies of this report are available from: NHTSA Technical Reference Division National Highway Traffic Safety Admin. 400 Seventh St., SW, Room 5108 Washington, DC 20590	
				19. Security Classification(of this report) UNCLASSIFIED	
20. Security Classification(of this page) UNCLASSIFIED		21. No. of Pages 341		22. Price	

Form DOT F1700.7 (8-72)

TABLE OF CONTENTS

Section		Page
1	Purpose, Test Procedures and Summary of Test M10303	1
2	Occupant and Vehicle Information Data Sheets	3
 <u>Appendix</u>		
A	Photographs	A
B	Dummy and Vehicle Response Data Traces	B
C	Load Cell Barrier Data Traces	C
D	Instrumentation and Data Channel Assignments	D
E	Dummy Calibration Data Traces and Tables	E
 <u>Data Sheet No.</u>		
1	Crash Test Summary	4
2	General Test and Vehicle Parameter Data	5
3	Post Impact Data	7
4	Test Vehicle Information	8
5	Dummy Positioning in Vehicle	10
6	Seat Belt Positioning Data	12
7	Vehicle Accelerometer Location and Data Summary	13
8	Hybrid III ATD Injury Criteria and Sensor Data	14
9	Seat Belt Assessment Test Data	17
10	Summary of FMVSS 212 Data	18
11	Windshield Zone Intrusion FMVSS 219 Data (Partial)	19
12	FMVSS 301 Fuel System Integrity Post Impact Data	20
13	FMVSS 301 Static Rollover Data	21
14	Vehicle Measurements	22
15	Camera Locations	24
16	Photographic Reference Target Locations	25
17	Vehicle Intrusion Measurements	26
18	Load Cell Locations on Fixed Barrier	30
19	Accident Investigation Division Data	31
20	Dummy/Vehicle Temperature Stabilization Chart	32

SECTION 1

PURPOSE, TEST PROCEDURE AND SUMMARY OF TEST M10303

1.1 PURPOSE

The purpose of this 35 mph (56.3 km/h) frontal barrier impact test is to obtain vehicle crashworthiness, occupant restraint system performance, and lower leg data for frontal barrier impacts. The impact velocity used in this test is in excess of the current 30 mph (48.3 km/h) FMVSS 208/212/219/301 requirements.

1.2 TEST PROCEDURE

This 56.3-km/h frontal barrier impact test was conducted in accordance with the Office of Crashworthiness Standards (OCS) New Car Assessment Program (NCAP) Laboratory Indicant Test Procedure, dated 01 October 1996 and the corresponding KARCO Engineering Test Procedure KTP-001, dated October 18, 1996. Data was obtained indicant of FMVSS 208, "Occupant Crash Protection"; FMVSS 212, "Windshield Retention"; FMVSS 219, "Windshield Zone Intrusion (Partial)"; and FMVSS 301 "Fuel System Integrity" performance. Procedures for receiving, inspection testing and reporting of test results are described in the test procedures and are not repeated in this report.

The test was conducted at KARCO Engineering on February 13, 2001 at a speed of 55.82 km/h. The test vehicle was instrumented with eight (8) accelerometers to measure longitudinal axis accelerations. The driver and passenger's restraint systems were instrumented with four (4) seat belt load cells to measure lap and shoulder belt tension. The specified impact velocity range was 55.5 to 57.1 km/h. The frontal barrier impact event was documented by one (1) real-time panning motion picture camera and seventeen (17) high-speed motion picture cameras. The pre- and post-test conditions were recorded by one (1) real-time motion picture camera. Camera locations and pertinent camera information is documented in the data sheets. Pre- and post-test photographs of the vehicle and dummies can be found in Appendix A.

The test vehicle contained two (2) part 572E 50th percentile adult male anthropomorphic test devices (ATDs). Both ATDs were instrumented with head, chest, and pelvic tri-axial accelerometers, left and right femur load cells, upper and lower tibia sensors, and foot accelerometers. In addition, chest displacement and upper neck six-axis force and moment sensors were utilized. The ATDs were positioned in the front outboard seating positions according to the dummy placement procedures specified in the Laboratory Indicant Test Procedure. Ninety-six (96) channels of data were recorded with a PC based (TDAS) on-board data acquisition system. The data was digitally sampled at 10,000 samples per second and processed per section IP11 of the Laboratory Indicant Test Procedure.

The Driver ATD (Serial No. 34) and the right-front passenger ATD (Serial No. 35) were re-calibrated for this test. FMVSS 208 "Occupant Crash Protection" injury criteria were not exceeded by either ATD during this frontal barrier impact test.

1.3 SUMMARY OF FRONTAL BARRIER IMPACT TEST

A rigid load cell barrier was impacted by a 2001 Dodge Dakota Sport Quad Cab Pickup at a velocity of 55.82 km/h. The test vehicle weight is 2185 kilograms with two (2) part 572E 50th percentile adult male ATDs. Twenty-four (24) load cell barrier data channels were obtained in conducting the February 13, 2001 NCAP test. The test vehicle is a gasoline vehicle, equipped with a longitudinally mounted, 6-cylinder engine and a 5-speed manual transmission.

The driver Head Injury Criteria (HIC) is 747.3. The maximum resultant chest deceleration over three (3) milliseconds is 51.9 g's. The left and right femur loads are -6053.5 and -4855.5 Newton's, respectively. Chest deflection for the driver ATD peaked at -55.9 mm. The driver ATD head contacted the airbag/headrest, its chest and abdomen contacted the seat belt and airbag, and both knees contacted the steering column and dash.

The right front passenger's HIC is 568.9. The maximum resultant chest deceleration over three (3) milliseconds is 42.0 g's. The left and right femur loads are -7549.5 and -5777.5 Newton's respectively. Chest deflection for the passenger ATD peaked at -21.9 mm. The passenger ATD head contacted the airbag and headrest, the chest and abdomen contacted the airbag and both knees contacted the glove box and dash.

Maximum shoulder belt spool out as measured by on-board potentiometers is 101.6 mm for the driver ATD and 188.1 mm for the passenger ATD. Shoulder belt stretch is not measured with pretensioners.

There was 100 percent windshield retention (minimum 50 percent required for passive restraint systems). No intrusion occurred into the protected or unprotected zone of the windshield. No Stoddard solvent leakage occurred after impact or during any phase of the rollover.

The test vehicle sustained a maximum static crush of 622 mm located at the vehicle centerline. Both the driver and passenger side doors opened without the aid of tools.

1.4 GENERAL COMMENTS

The 2001 Dodge Dakota Sport Quad Cab Pickup passed the requirements of FMVSS 208, FMVSS 212, FMVSS 219 and FMVSS 301-75. Data pertaining to these standards are presented in the data sheets.

The vehicle, occupant, camera and measurement data are presented in Section 2. Appendix A contains the still photograph prints. Appendix B contains the dummy and vehicle response data traces. Appendix C contains Load Cell Barrier information. Appendix D contains the instrumentation data channel assignments. Appendix E contains the dummy calibration data and Appendix F contains the owner's manual instructions for the occupant seating and restraint systems.

SECTION 2
OCCUPANT AND VEHICLE INFORMATION/DATA SHEETS

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

NHTSA No.: M10303

Test Program: 2001 NHTSA 35 mph NCAP

Test Date: 02/13/01

CONVERSION FACTORS USED IN THIS REPORT*

Quantity	Typical Application	Std Units	Metric Unit	Multiply By
Mass	Vehicle Weight	lb	kg	0.4536
Linear Velocity	Impact Velocity	mile/h	km/h	1.609
Length or Distance	Measurements	in	mm	25.4
Volume	Fuel Systems	gal	liter	3.785
Volume	Small Fluids	oz	mL	29.573
Pressure	Tire Pressures	lbf/in ²	kPa	7.0
Volume	Liquid	gal	liter	3.785
Temperature	General Use	°F	°C	=(tf -32)/1.8
Force	Dynamic Forces	lbf	N	4.448
Moment	Torque	lbf/ft	Nm	1.355

* Based on the Recommended Practice in SAE J916, May 85

DATA SHEET NO. 1
CRASH TEST SUMMARY

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

NHTSA No.: M10303

Test Program: 2001 NHTSA 35 mph NCAP

Test Date: 02/13/01

PRIMARY IMPACT DATA

Measured Parameter	Units	Value
Velocity at Impact	km/h	55.82
Test Weight	kg	2185
Impact Angle	degrees	0
Average Rebound	mm	958
Maximum Static Crush	mm	622

DOOR OPENING AND SEAT TRACK INFORMATION

Description	Driver	Passenger
Front Door Opening	Opened	Opened
Rear Door Opening	Opened	Jammed
Seat Track Shift (mm)	None	None
Seat Back Failure	None	None

TEST DUMMY INFORMATION

Description	Driver	Passenger
Dummy Type / Serial No.	50% Male Hybrid III / No. 34	50% Male Hybrid III / No. 35
Head Contact	Airbag/Headrest/Sunvisor	Airbag/Headrest
Chest Contact	Airbag/Belt	Airbag/Belt
Abdomen Contact	Belt	Airbag/Belt
Left Knee Contact	Steering Column/Dash	Glove Box/Dash
Right Knee Contact	Dash	Glove Box

16mm MOVIE COVERAGE

High Speed	17
Real Time	1
Total	18

DATA CHANNELS

Driver ATD Sensors	40
Passenger ATD Sensors	40
Belt Assessment Sensors	8
Vehicle Structure Accelerometers	8
Rigid Barrier Load Cells	24
Total	120

DATA SHEET NO. 2
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

NHTSA No.: M10303

Test Program: 2001 NHTSA 35 mph NCAP

Test Date: 02/13/01

TEST VEHICLE INFORMATION

Make	Dodge
Model	Dakota Sport
Body Style	Quad Cab Pickup
NHTSA No.	M10303
VIN	1B7GL2AX115188580
Color	White
Delivery Date	2/3/01
Odometer Reading (mile)	135
Dealer	Hemet Chrysler Center
Transmission	5-Speed Manual
Final Drive	Rear
Number of Cylinders	6
Engine Displacement (L)	3.9
Engine Placement	Longitudinal

TEST VEHICLE OPTIONS

Driver Airbag	Yes
Passenger Airbag	Yes
Power Windows	No
Power Steering	Yes
Power Door Locks	No
Tilt Wheel	No
Air Conditioning	Yes
Power Brakes	Yes
Disc Brakes, Front	Yes
Disc Brakes, Rear	No
Anti-lock Brakes	Yes
AM/FM/Cassette	Yes
Anti-Theft System	No
Cruise Control	No

DATA FROM CERTIFICATION LABEL

Manufactured By	Daimler Chrysler Corporation	GVWR (kg)	2558
Date of Manufacture	October-00	GAWR Front (kg)	1406
		GAWR Rear (kg)	1436

DATA FROM TIRE PLACARD

Measured Parameter	Front	Rear
Maximum Tire Pressure (kPa)	245	245
Cold Pressure (kPa)	245	245
Recommend Tire Size	P215/75/R15	P215/75/R15
Tire Size on Vehicle	P215/75/R15	P215/75/R15
Tire Manufacturer	Bridgestone	Bridgestone

VEHICLE SEATING AND CAPACITY WEIGHT INFORMATION

Measured Parameter	Front	Rear	Third	Total
Type of Seats	Bench	Bench	None	
Number of Occupants	3	3	0	6
Capacity Wt. (VCW) (kg)				655
Cargo Weight (RCLW) (kg)				136

DATA SHEET NO. 2...(continued)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

NHTSA No.: M10303

Test Program: 2001 NHTSA 35 mph NCAP

Test Date: 02/13/01

TEST VEHICLE WEIGHTS

	Units	As Delivered (UVW)			As Tested (ATW)		
		Front Axle	Rear Axle	Total	Front Axle	Rear Axle	Total
Left	kg	544	424		592	506	
Right	kg	531	404		586	501	
Ratio	%	56.5	43.5		53.9	46.1	
Totals	kg	1075	828	1903	1178	1007	2185

TARGET TEST WEIGHT CALCULATION

Measured Parameter	Units	Value
Total Delivered Weight (UVW)	kg	1903
Weight of 2 P572 ATD's	kg	152
Rated Cargo/Luggage Weight (RCLW)	kg	136
Calculated Vehicle Target Weight (TVTW)	kg	2191

TEST VEHICLE ATTITUDE AND CG

	Units	LF	RF	LR	RR	CG (aft of front axle)
As Delivered	mm	807	821	879	905	1447
As Tested	mm	784	802	850	865	1533

Vehicle Wheel base (mm): 3326

Weight of Ballast secured in cargo area (kg): 62

Vehicle Components Removed: Side mirrors, jack, tools, spare tire and paneling.

* Ballast weight does not include cameras, instrumentation, and brake abort system.

FUEL SYSTEM DATA

Fuel System Capacity From Owner's Manual (L): 90.8

Usable Capacity Figure Furnished by COTR (L): N/A

Actual Test Volume with entire fuel System Filled (L): 84.4

Test Fluid Type: Stoddard Solvent ; Specific Gravity: 0.764

Kinematic Viscosity: as per ASTM Standard D484-71 ; Color: Red

Is Vehicle Fuel Pump Electric or Mechanical?: Electric

If electric, does pump operate with ignition switch "ON" & engine "OFF"? Yes

Fuel System Particulars: Driver side filler door, tank mounted at rear.

DATA SHEET NO. 3
POST IMPACT DATA

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

NHTSA No.: M10303

Test Program: 2001 NHTSA 35 mph NCAP

Test Date: 02/13/01

SPEED TRAP DATA

Measured Parameter	Units	Requirement	Value
Trap No. 1 Velocity (Primary)	km/h	55.51 to 57.12	55.82
Trap No. 1 Entry Distance	mm	< 1524	1524
Trap No. 1 Exit Distance	mm	< 1524	305
Trap No. 2 Velocity (Redundant)	km/h	55.51 to 57.12	56.10
Trap No. 2 Entry Distance	mm	< 1524	1524
Trap No. 2 Exit Distance	mm	< 1524	305

VEHICLE STATIC CRUSH

Measured Parameter	Units	Pre-Test	Post-Test	Difference
Left Side	mm	5203	4812	-391
Center	mm	5462	4840	-622
Right Side	mm	5203	4730	-473

VEHICLE REBOUND FROM BARRIER

Measured Parameter	Units	Value
Left Side	mm	958
Center	mm	916
Right Side	mm	1001
Average	mm	958

DATA SHEET NO. 4
TEST VEHICLE INFORMATION

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

NHTSA No.: M10303

Test Program: 2001 NHTSA 35 mph NCAP


Test Date: 02/13/01

NOMINAL DESIGN RIDING POSITION

The driver and passenger seat backs are positioned to the manufacturers designated angle. The procedure is as follows: A special application tool with pointed probes is inserted through the fabric to make contact with the rigid portion of the lower seat frame assembly, approximately 13 inches above the pivot point of the seat back. An inclinometer is placed against the flat surface of the tool and the seat back angle is measured directly from the dial face.

Driver seat back angle: 14° with a seated dummy

Passenger seat back angle: 14° with a seated dummy

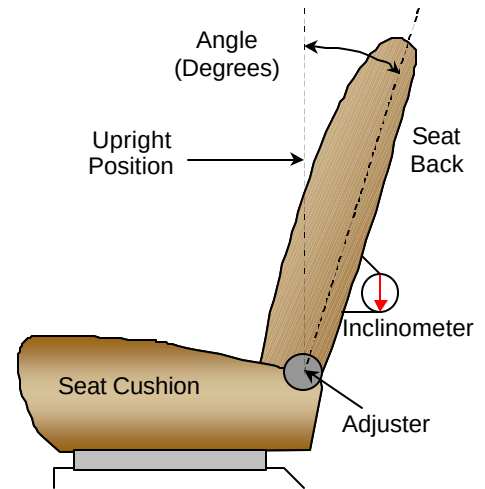

FRONT SEAT ASSEMBLY

SEAT FORE/AFT POSITIONS

Both driver and passenger seats have 23 detent or positions. The first or forward most position is counted as number one (1). The fore/aft position is set aft of the middle position for both driver and passenger.

Driver seat fore/aft total travel: 23 seating positions or detents

Passenger seat fore/aft total travel: 23 seating positions or detents

Driver seat fore/aft position: 12th detent from forward most

Passenger seat fore/aft position: 12th detent from forward most

SEAT BELT UPPER ANCHORAGE

Both driver and passenger seats are equipped with adjustable anchorages. Of 6 positions, each is placed in the 3rd position from the top.

DATA SHEET NO. 4...(continued)

TEST VEHICLE INFORMATION

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

NHTSA No.: M10303

Test Program: 2001 NHTSA 35 mph NCAP

Test Date: 02/13/01

FUEL TANK CAPACITY DATA


The "Usable Capacity" of the standard equipment fuel tank is: 90.8 liters

The "Usable Capacity" of any optional equipment fuel tank is: N/A liters

"Usable Capacity" used for certification tests FMVSS 301 requirements: 83.5 to 85.3 liters


Actual amount of Stoddard solvent added to vehicle for certification test: 84.4 liters

The test vehicle is equipped with an electric fuel pump. The fuel pump operates for approximately two seconds after the ignition is placed to the "ON" position, after which the fuel pump automatically shuts off. The fuel filler door is located on the left rear fender. The standard fuel tank occupies the area under the rear seat. Fuel lines run along the left side of the body to the engine compartment.

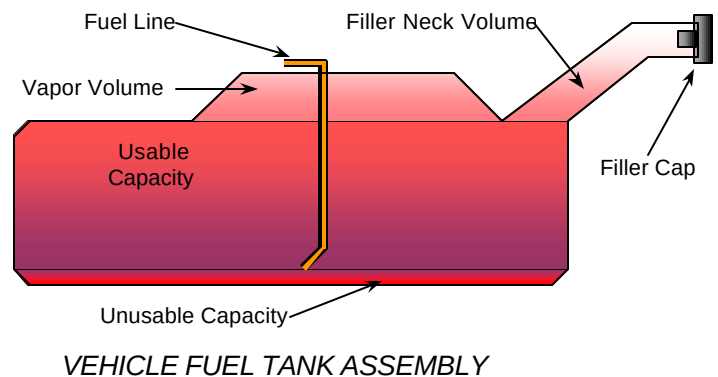

STEERING COLUMN ADJUSTMENT

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes, when it is moved through its full range of motion. An aluminum plate is placed across the rim of the steering wheel, an inclinometer is placed onto the plate and the angle is measured. This vehicle is not equipped with an adjustable steering column; its geometric center is 26.5°.

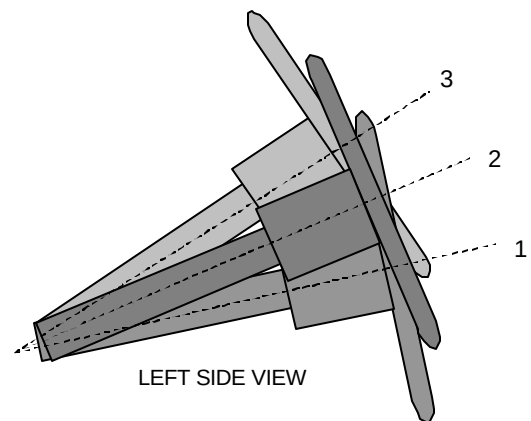

Lowermost, position 1: N/A°

Geometric center, position 2: 26.5°

Uppermost, position 3: N/A°

DATA SHEET NO. 5


DUMMY POSITIONING IN VEHICLE

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

NHTSA No.: M10303

Test Program: 2001 NHTSA 35 mph NCAP

Test Date: 02/13/01

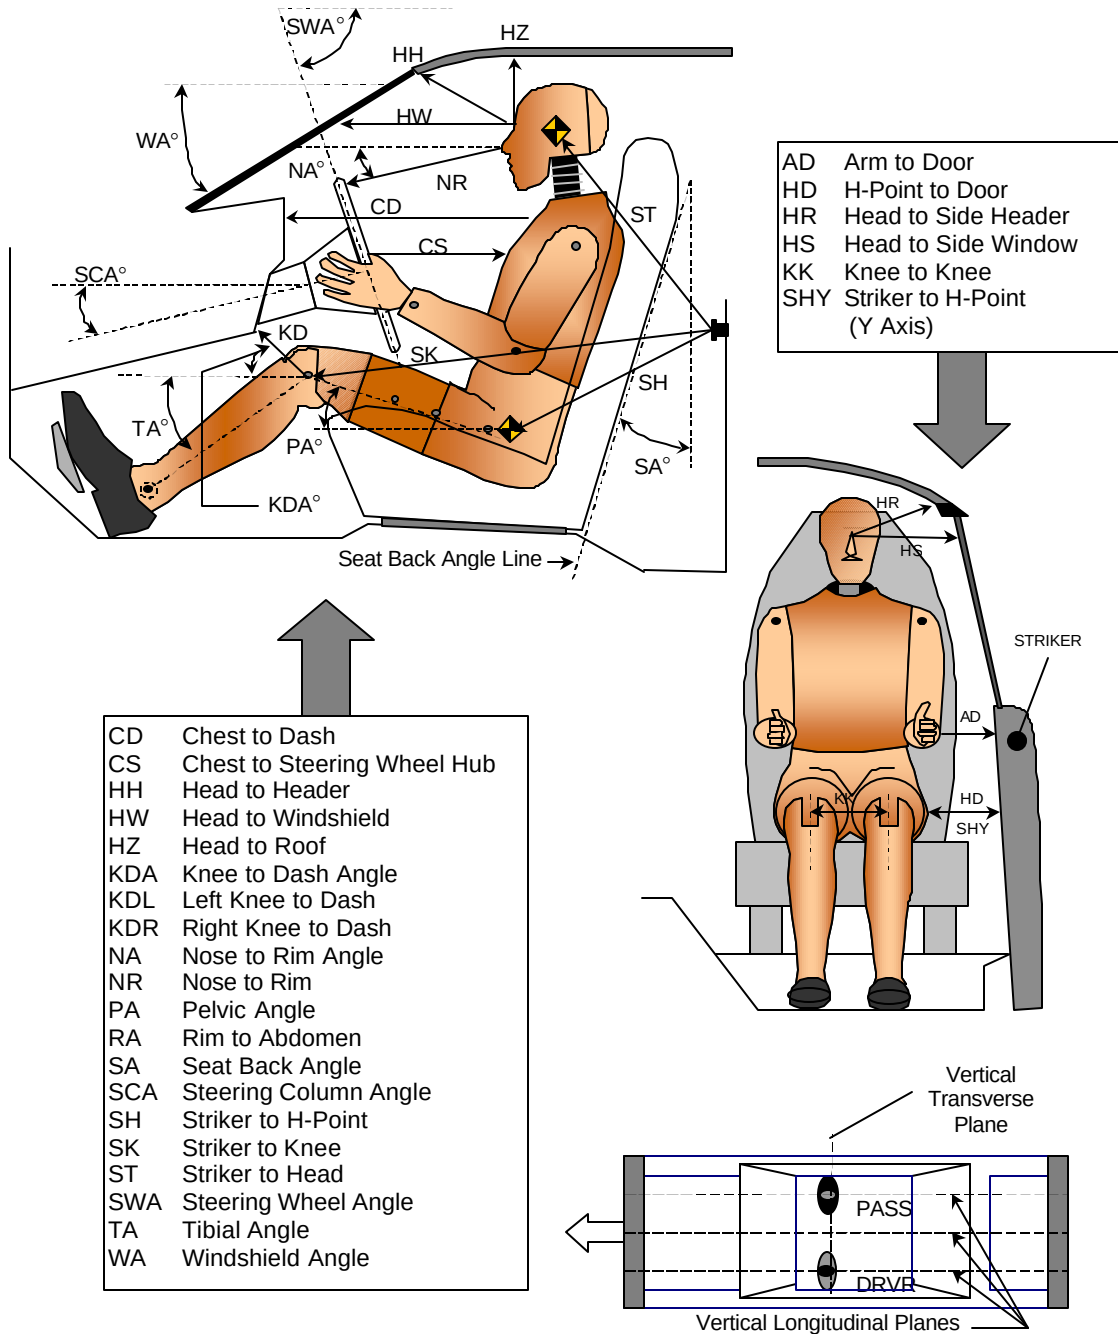

DUMMY MEASUREMENTS FOR FRONT SEAT OCCUPANTS

DATA SHEET NO. 5...(continued)
DUMMY POSITIONING IN VEHICLE

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

NHTSA No.: M10303

Test Program: 2001 NHTSA 35 mph NCAP

Test Date: 02/13/01

TEST DUMMY POSITION MEASUREMENTS

Code	Measurement Description	Driver		Passenger	
		Length (mm)	Angle (°)	Length (mm)	Angle (°)
WA	Windshield Angle		35		
SWA	Steering Wheel Angle		63.5		
SCA	Steering Column Angle		26.5		
SA	Seat Back Angle		14		14
HZ	Head to Roof (Z)	200	90	190	90
HH	Head to Header	403	0	405	0
HW	Head to Windshield	575	0	595	0
HR	Head to Side Header (Y)	251		228	
NR	Nose to Rim	393	16		
CD	Chest to Dash	505		540	
CS	Chest to Steering Hub	290	0		
RA	Rim to Abdomen	165	0		
KDL	Left Knee to Dash	160	19	145	
KDR	Right Knee to Dash	163		180	32
PA	Pelvic Angle		22		21
TA	Tibia Angle		39		36
KK	Knee to Knee (Y)	205		190	
SK	Striker to Head	594	0	600	2
ST	Striker to Knee	630	10	625	10
SH	Striker to H-Point	195	15	195	14
SHY	Striker to H-Point (Y)	251		240	
HS	Head to Side Window	315		300	
HD	H-Point to Door (Y)	186		178	
AD	Arm to Door (Y)	103		40	


DATA SHEET NO. 6 **SEAT BELT POSITIONING DATA**

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

NHTSA No.: M10303

Test Program: 2001 NHTSA 35 mph NCAP

Test Date: 02/13/01

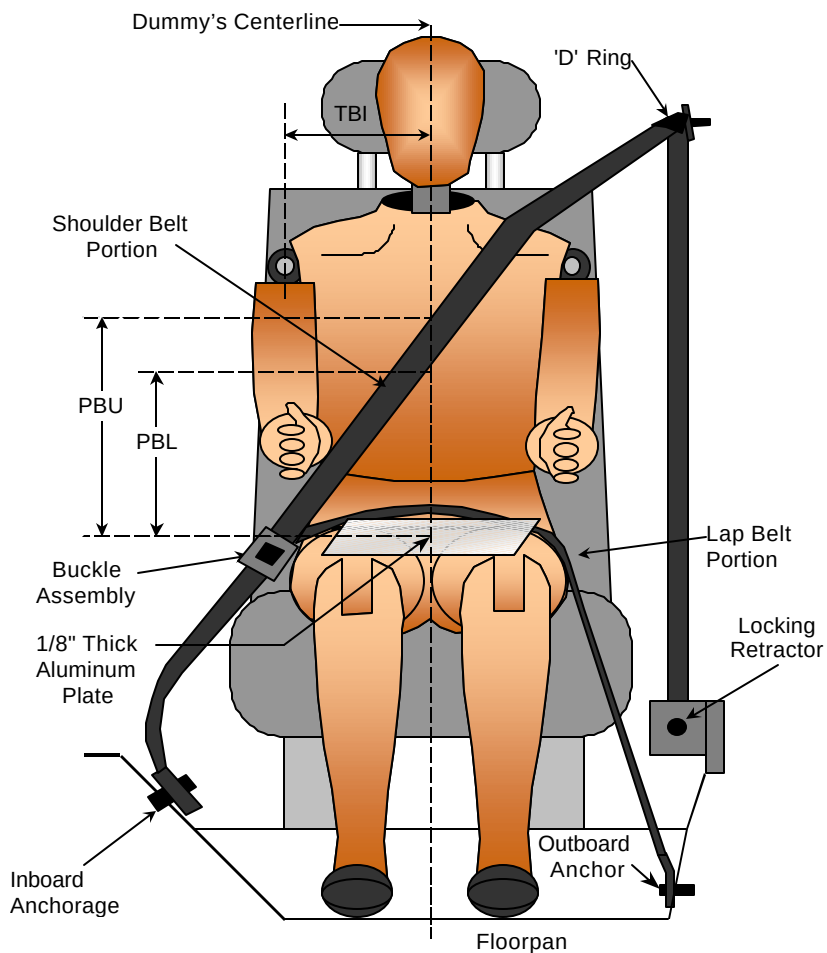

SEAT BELT POSITIONING MEASUREMENTS

Measurement Description	Units	Driver	Passenger
TBI - Dummy CL to Lap/Shoulder Belt Intersect	mm	190	190
PBU - Top surface of reference to belt upper edge	mm	300	320
PBL - Top surface of reference to belt lower edge	mm	220	240
Lap Belt tension	Newton's	10	10
Shoulder Belt tension	N/A	Retractor	Retractor

DATA SHEET NO. 7 - VEHICLE ACCELEROMETER LOCATION AND DATA SUMMARY

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

NHTSA No.: M10303

Test Program: 2001 NHTSA 35mph NCAP



Test Date: 02/13/01

VEHICLE X-AXIS ACCELEROMETER PEAK DATA AND PRE-TEST LOCATIONS

No.	Accelerometer Location	Measurements (mm)			Peak Values				
		X	Y	Z	Units	Max	Time	Min	Time
1	Left Rear X-Member (Pri.)	2805	-650	450	G's	2.6	150.4	-40.2	18.7
2	Right Rear X-Member (Pri.)	2805	650	450	G's	3.2	150.6	-34.6	17.5
3	Engine Top	4690	-60	920	G's	15.6	47.7	-117.5	34.2 *
4	Engine Bottom	4490	160	200	G's	13.0	53.7	-89.1	31.3 *
5	Left Brake Caliper	4500	-750	225	G's	31.1	56.5	-87.5	46.3 *
6	Right Brake Caliper	4500	750	225	G's	22.6	30.2	-73.6	40.6 *
7	Instrument Panel	4065	0	1140	G's	55.4	75.2	-129.3	61.5
8	Left Rear X-Member (Rednt.)	2805	610	450	G's	2.8	150.4	-39.3	18.5

Reference Points X - From Rear Surface of Vehicle Y - Vehicle Centerline Z - Ground Plane

* Channels failed at 59.6 msec.

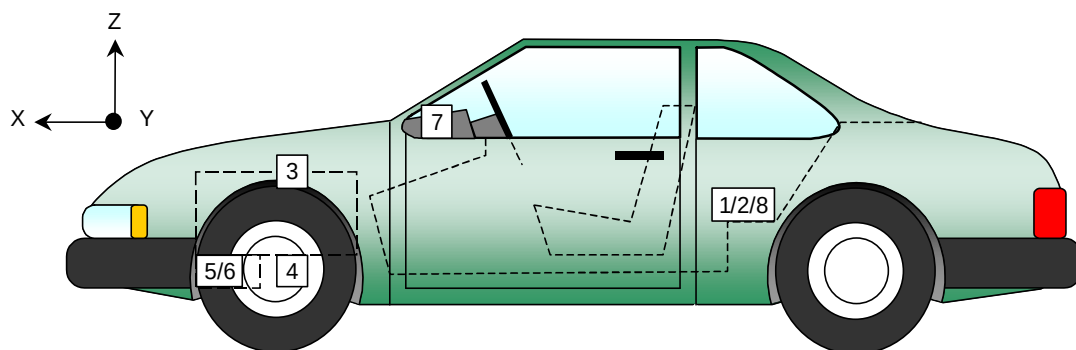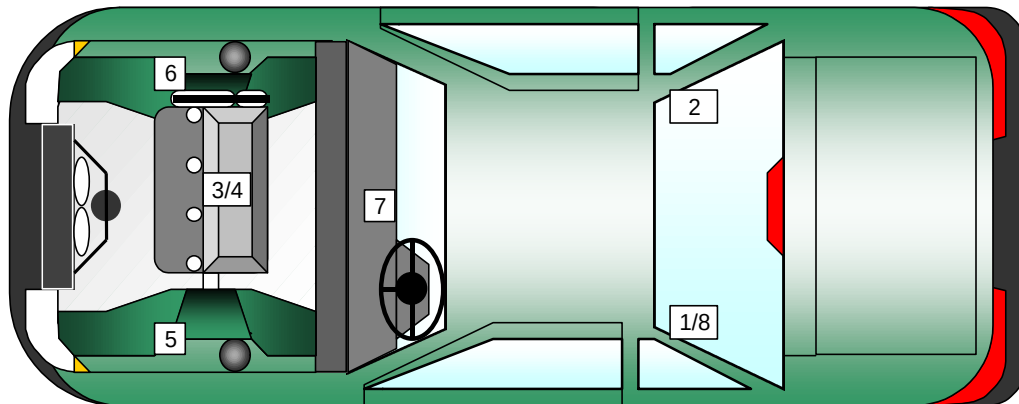

DATA SHEET NO. 8 - HYBRID III ATD INJURY CRITERIA AND SENSOR DATATest Vehicle: 2001 Dodge Dakota Sport Quad Cab PickupNHTSA No.: M10303Test Program: 2001 NHTSA 35mph NCAPTest Date: 02/13/01**HEAD PRIMARY PEAK ACCELERATIONS**

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Head CG	X	G's	25.4	185.7	-60.9	72.1	4.3	271.5	-48.1	94.4
Head CG	Y	G's	3.8	163.8	-10.1	95.5	5.1	67.4	-21.0	96.7
Head CG	Z	G's	29.5	65.8	-11.6	120.6	33.9	80.0	-11.4	130.3
Head CG Resultant	N/A	G's	64.4	71.2			54.9	90.3		

CHEST PRIMARY PEAK ACCELERATIONS

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Chest CG	X	G's	5.6	161.5	-49.6	67.2	2.8	172.0	-38.5	79.5
Chest CG	Y	G's	3.8	106.3	-10.5	68.1	9.0	49.6	-4.6	80.9
Chest CG	Z	G's	18.6	57.9	-13.4	122.2	19.7	86.9	-15.9	123.4
Chest CG Resultant	N/A	G's	53.6	67.1			42.2	79.6		

FEMUR PEAK FORCES

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Left Femur	Z	Newtons	699.0	36.3	-6053.5	48.6	700.4	40.7	-7549.5	50.8
Right Femur	Z	Newtons	396.1	34.9	-4855.5	47.2	508.2	40.1	-5777.5	55.0

SEAT BELT SENSOR PEAK VALUES

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Lap Belt Force	N/A	Newtons	3883.4	49.3	-14.3	143.2	5170.1	53.0	4.9	0.0
Shoulder Belt Force	N/A	Newtons	3176.7	76.6	-21.5	134.1	3182.3	62.5	-8.0	136.9
Shoulder Belt Pullout	N/A	MM	101.6	159.2	-2.1	247.2	188.1	120.4	-0.2	3.8
Shoulder Belt Stretch	N/A	MM/CM	0.000	0.0	0.000	0.0	0.000	0.0	0.000	0.0

* Not used with pre-tensioners.

HEAD INJURY CRITERIA (HIC)

Location	Driver				Passenger			
	HIC	Avg G	T ¹	T ²	HIC	Avg G	T ¹	T ²
Head CG Primary	747.3	53.4	62.5	98.3	568.9	47.8	70.2	106.1

CHEST CLIP (3MSEC)

Location	Driver			Passenger		
	CLIP	T ¹	T ²	CLIP	T ¹	T ²
Chest CG Primary	51.9	66.3	69.3	42.0	79.4	82.4

DATA SHEET NO. 8...(continued)Test Vehicle: 2001 Dodge Dakota Sport Quad Cab PickupNHTSA No.: M10303Test Program: 2001 NHTSA 35mph NCAPTest Date: 02/13/01**PELVIC PEAK ACCELERATIONS**

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Pelvis	X	G's	5.4	146.4	-69.5	47.6	7.2	135.2	-88.4	50.6
Pelvis	Y	G's	7.6	98.9	-8.3	69.6	4.3	44.9	-13.3	53.6
Pelvis	Z	G's	20.6	67.0	-15.8	108.1	12.5	45.3	-19.1	116.0

UPPER NECK PEAK FORCES AND MOMENTS

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Neck Force	X	Newtons	114.0	121.2	-383.6	70.2	329.6	83.1	-401.7	65.7
Neck Force	Y	Newtons	136.5	166.2	-231.0	81.5	296.2	63.2	-158.7	116.8
Neck Force	Z	Newtons	2480.4	70.4	-736.4	218.9	1962.8	85.1	-610.6	123.1
Neck Moment	X	N•m	18.6	172.5	-23.0	99.2	13.3	73.8	-22.9	86.0
Neck Moment	Y	N•m	21.3	158.6	-53.4	217.6	37.6	86.8	-21.2	65.7
Neck Moment	Z	N•m	18.5	111.7	-11.4	221.0	29.6	101.0	-9.5	157.9

FOOT PEAK ACCELERATIONS

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Left Foot Aft	X	G's	27.9	64.0	-79.6	35.3	41.8	53.0	-208.3	45.0
Left Foot Aft	Z	G's	28.0	35.0	-66.2	60.7	58.1	59.4	-82.0	83.0
Left Foot Fore	Z	G's	40.6	38.6	-55.3	60.8	112.0	59.5	-223.0	43.3
Right Foot Aft	X	G's	36.8	66.2	-198.8	48.9	36.7	64.9	-186.8	46.3
Right Foot Aft	Z	G's	7.5	41.0	-77.1	47.2	17.5	41.5	-45.7	72.5
Right Foot Fore	Z	G's	75.0	37.6	-217.0	47.9	19.8	67.4	-81.9	46.7

UPPER AND LOWER TIBIA PEAK FORCES AND MOMENTS

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Left Lower Moment	X	N•m	9.1	253.4	-73.9	62.1	46.0	81.4	-36.3	54.5
Left Lower Moment	Y	N•m	64.6	63.7	-46.9	36.3	136.9	90.5	-129.6	45.7
Left Lower Force	Z	Newtons	341.6	36.4	-4785.6	63.7	161.8	149.6	-6044.1	44.8
Left Upper Moment	X	N•m	18.6	244.8	-51.8	111.6	16.3	157.4	-66.6	54.9
Left Upper Moment	Y	N•m	52.8	49.0	-123.1	61.9	14.1	140.5	-197.6	46.2
Right Lower Moment	X	N•m	43.4	48.2	-45.4	84.3	84.0	77.9	-23.2	69.3
Right Lower Moment	Y	N•m	56.5	78.4	-110.4	49.4	57.7	72.3	-81.4	47.8
Right Lower Force	Z	Newtons	185.4	168.2	-2400.6	56.4	126.2	140.5	-3608.4	75.3
Right Upper Moment	X	N•m	93.9	48.5	-14.7	121.0	47.8	97.1	-51.6	70.1
Right Upper Moment	Y	N•m	12.3	298.0	-113.6	50.2	34.0	55.8	-127.3	44.8

DATA SHEET NO. 8...(continued)Test Vehicle: 2001 Dodge Dakota Sport Quad Cab PickupNHTSA No.: M10303Test Program: 2001 NHTSA 35mph NCAPTest Date: 02/13/01**CHEST PEAK DISPLACEMENTS**

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Chest CG	X	MM	0.7	22.8	-55.9	82.0	0.4	6.5	-21.9	91.8

HEAD REDUNDANT PEAK ACCELERATIONS

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Head CG	X	G's	24.4	185.5	-59.9	72.8	5.1	262.3	-47.2	94.3
Head CG	Y	G's	3.5	160.2	-10.1	98.8	6.0	64.9	-20.9	97.1
Head CG	Z	G's	28.3	65.2	-13.8	121.4	36.9	85.9	-11.6	130.9
Head CG Resultant	N/A	G's	62.3	70.8			56.1	89.9		

CHEST REDUNDANT PEAK ACCELERATIONS

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Chest CG	X	G's	6.6	155.7	-50.4	67.1	2.9	170.9	-38.0	79.5
Chest CG	Y	G's	2.6	106.8	-11.0	84.4	11.0	49.7	-4.2	78.5
Chest CG	Z	G's	18.7	66.8	-13.9	122.5	20.3	87.2	-15.2	123.7
Chest CG Resultant	N/A	G's	54.4	67.0			41.9	79.6		

REDUNDANT HEAD INJURY CRITERA (HIC)

Location	Driver				Passenger			
	HIC	Avg G	T ¹	T ²	HIC	Avg G	T ¹	T ²
Head CG Redundant	745.7	53.3	62.2	98.1	553.2	47.3	71.3	107.2

REDUNDANT CHEST CLIP (3MSEC)

Location	Driver			Passenger		
	CLIP	T ¹	T ²	CLIP	T ¹	T ²
Chest CG Redundant	52.3	66.3	69.3	41.7	79.4	82.4

DATA SHEET NO. 9**SEAT BELT PERFORMANCE ASSESSMENT TEST DATA**Test Vehicle: 2001 Dodge Dakota Sport Quad Cab PickupNHTSA No.: M10303Test Program: 2001 NHTSA 35 mph NCAPTest Date: 02/13/01**SEAT BELT PLACEMENT MEASUREMENTS**

Measurement Description	Units	Driver	Passenger
TCI - Dummy CL to Lap/Shoulder Belt Intersect	mm	190	190
PBU -Top surface of reference to belt upper edge	mm	300	320
PBL - Top surface of reference to belt lower edge	mm	220	240
Lap Belt tension	Newton's	10	10
Shoulder Belt tension	N/A	Retractor	Retractor

BELT LENGTH DATA

Measurement Description	Units	Driver	Passenger
Retractor reel to 'D' ring	mm	720	720
Shoulder belt length as measured on ATD	mm	760	760
Lap belt length as measured on ATD	mm	650	650
Remainder of belt on reel	mm	850	850
Total belt length for continuous webbing systems	mm	2980	2980

SHOULDER BELT SPOOL-OFF DATA

Measurement Description	Units	Driver	Passenger
As determined mechanically	mm	30.0	130.0
As determined electronically	mm	101.6	188.1

BELT STRETCH DATA

Measurement Description	Units	Driver	Passenger
Electronically from shoulder belt load cell and "D" ring	mm/cm	N/A	N/A
Mechanically	mm/cm	N/A	N/A

*Not used with shoulder belt pre-tensioner systems.

DATA SHEET NO. 10
SUMMARY OF FMVSS 212 DATA

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup
 Test Program: 2001 NHTSA 35 mph NCAP

NHTSA No.: M10303
 Test Date: 02/13/01


Windshield Mounting Details: Windshield glass is secured to the vehicle frame with a rubber type adhesive. There is no molding that covers the windshield periphery at any point.

The standard requires that the post-test retention measurement be a minimum of 75 percent of the pretest total periphery measurement for vehicles not equipped with occupant passive restraints and 50 percent for each side of the windshield for vehicles that are equipped with occupant passive restraints.

Temperature of windshield molding during test: 21.1 °C

WINDSHIELD PERIPHERY MEASUREMENTS

Measurement	Pre-Test(mm)	Post-Test (mm)	% of Retention
Left Side	2095.0	2095.0	100
Right Side	2095.0	2095.0	100
Total	4190.0	4190.0	100

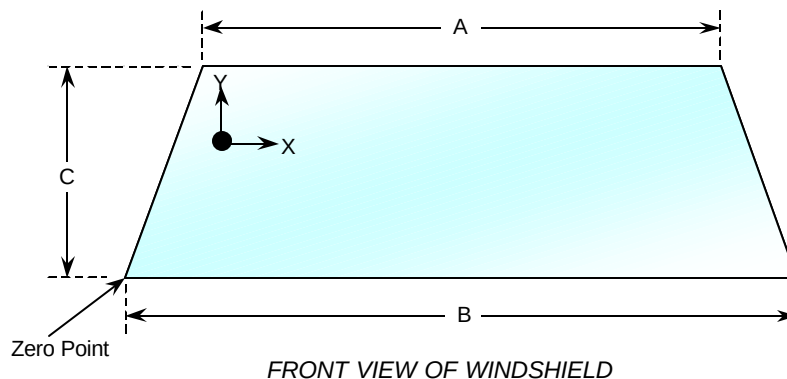

WINDSHIELD DIMENSIONS

Item	Units	Segment Length	Molding Width
A	mm	1241	24
B	mm	1615	N/A
C	mm	667	26

DATA SHEET NO. 11


WINDSHIELD ZONE INTRUSION FMVSS 219 (PARTIAL) DATA

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

NHTSA No.: M10303

Test Program: 2001 NHTSA 35 mph NCAP

Test Date: 02/13/01

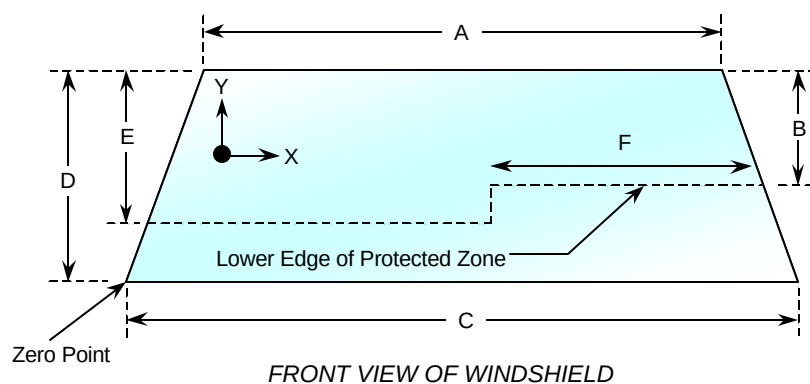

WINDSHIELD AND PROTECTED ZONE

Item	Units	Value
A	mm	1241
B	mm	392
C	mm	1615
D	mm	667
E	mm	396
F	mm	451

AREA OF PROTECTED ZONE FAILURES

- A. Provide coordinates of the area that the protected zone was penetrated more than 0.25 in. by a vehicle component other than one that is normally in contact with the windshield.

X	Y
N/A	N/A
N/A	N/A
N/A	N/A
N/A	N/A

- B. Provide coordinates of the area beneath the protected zone that the inner surface of the windshield was penetrated by a vehicle component.

X	Y
N/A	N/A
N/A	N/A
N/A	N/A
N/A	N/A

DATA SHEET NO. 12

FMVSS 301 FUEL SYSTEM INTEGRITY POST IMPACT DATA

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

NHTSA No.: M10303

Test Program: 2001 NHTSA 35 mph NCAP

Test Date: 02/13/01

Test Time: 12:54 PM

Temperature at Time of Impact: 10.5 °C

STODDARD SOLVENT SPILLAGE MEASUREMENT

- A. From impact until vehicle motion ceases: 0.0 oz.
(Maximum Allowable = 1 ounce)
- B. For the 5 minute period after motion ceases: 0.0 oz.
(Maximum Allowable = 5 ounces)
- C. For the following 25 minutes: 0.0 oz.
(Maximum Allowable = 1 oz./minute)
- D. Spillage Details: No leakage occurred


DATA SHEET NO. 13
FMVSS 301 STATIC ROLLOVER DATA SHEET

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup


NHTSA No.: M10303

Test Program: 2001 NHTSA 35 mph NCAP



Test Date: 02/13/01

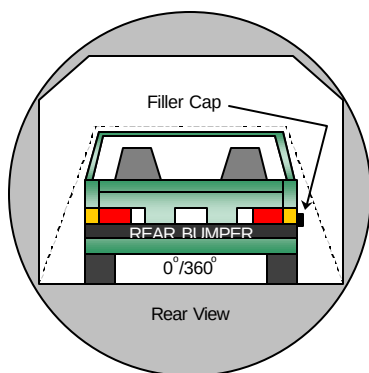


0° TO 90°

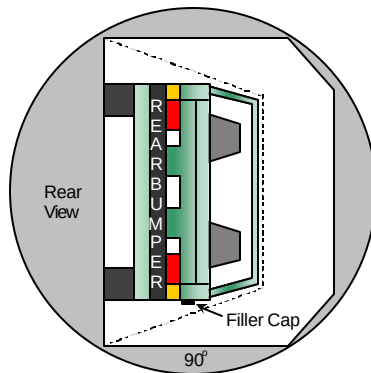


90° TO 180°

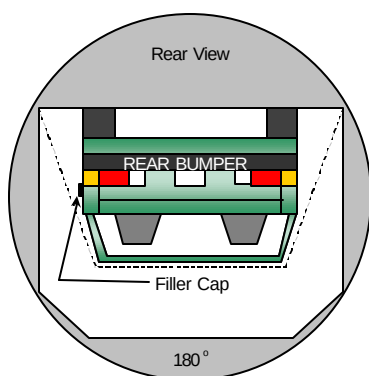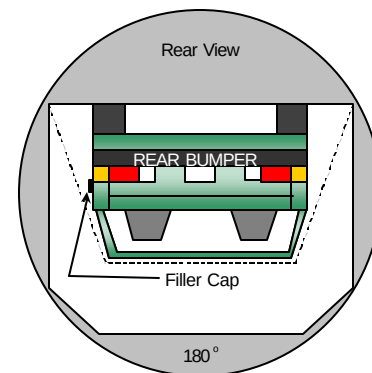

180° TO 270°

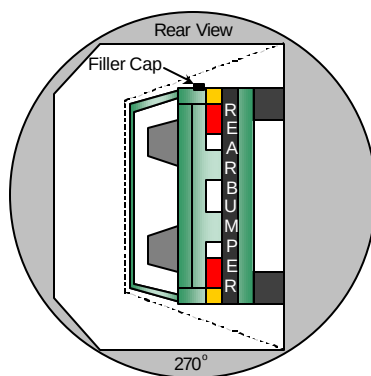

270° TO 360°

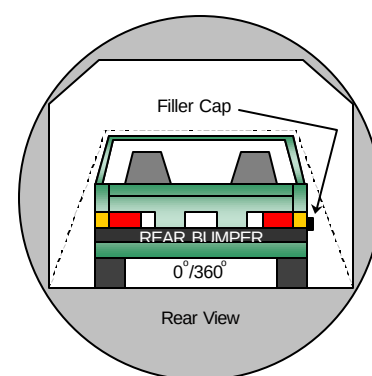

1. The specified fixture rollover rate for each 90° of rotation is 60 to 120 seconds.
2. The position hold time at each position is 300 seconds (minimum).
3. No solvent leakage occurred during rollover.

Test Phase	Rotation Time (sec.)	Hold Time (sec.)	Spillage (oz.)
0° TO 90°	81	300	0.0
90° TO 180°	82	300	0.0
180° TO 270°	79	300	0.0
270° TO 360°	82	300	0.0

DATA SHEET NO. 14
VEHICLE MEASUREMENTS


Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

NHTSA No.: M10303

Test Program: 2001 NHTSA 35 mph NCAP

Test Date: 02/13/01

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
1	Total length of vehicle at centerline	mm	5462	4840	-622
2	RSOV to front of engine	mm	4718	4658	-60
3	RSOV to firewall centerline	mm	4391	4116	-275
4	RSOV to leading edge of right door	mm	4022	4031	9
5	RSOV to leading edge of left door	mm	4022	4009	-13
6	RSOV to lower leading edge of right door	mm	4028	4006	-22
7	RSOV to lower leading edge of left door	mm	4017	3996	-21
8	RSOV to upper trailing edge of right door	mm	2948	2955	7
9	RSOV to upper trailing edge of left door	mm	2944	2937	-7
10	RSOV to lower trailing edge of right door	mm	2952	2929	-23
11	RSOV to lower trailing edge of left door	mm	2938	2920	-18
12	RSOV to bottom of right 'A' pillar	mm	4030	4045	15
13	RSOV to bottom of left 'A' pillar	mm	4032	4024	-8
14	RSOV to firewall on right side	mm	4374	4289	-85
15	RSOV to firewall of left side	mm	4377	4212	-165
16	RSOV to steering column	mm	3521	3450	-71
17	Center of steering column to left 'A' pillar	mm	541	597	56
18	Center of steering column to headlining	mm	421	400	-21
19	RSOV to right side of front bumper	mm	5203	4730	-473
20	RSOV to left side of front bumper	mm	5203	4812	-391
21	Length of engine block	mm	416	416	0
RD	RSOV to right side of dash panel	mm	3744	3720	-24
CD	RSOV to center of dash panel	mm	3726	3712	-14
LD	RSOV to left side of dash panel	mm	3736	3664	-72

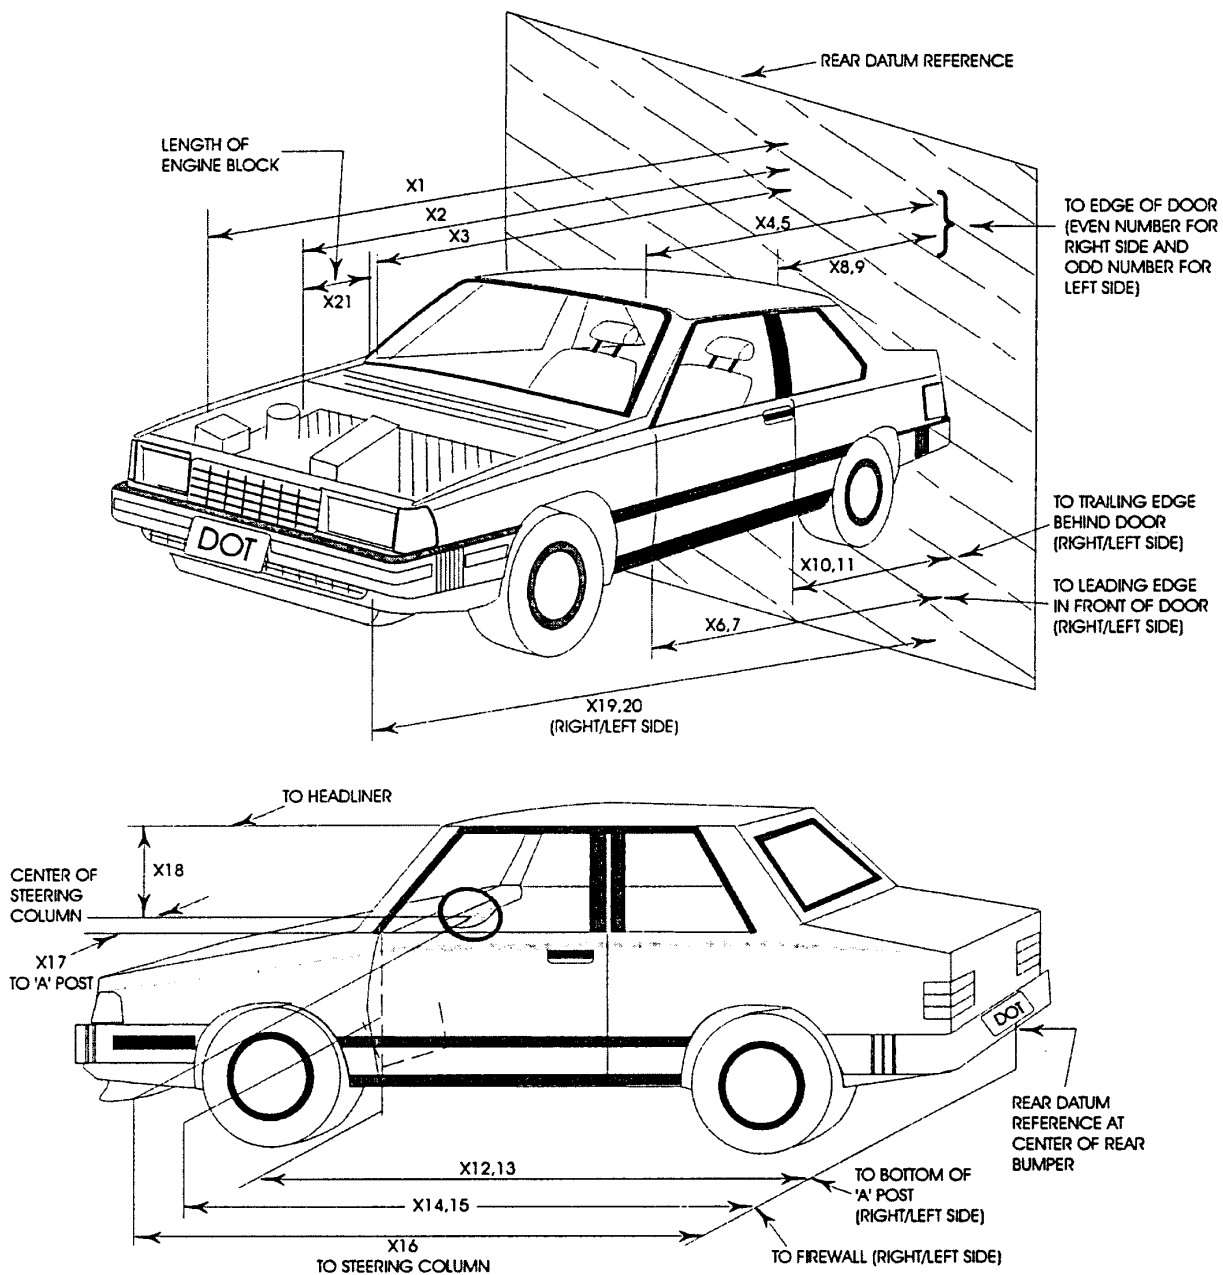

DATA SHEET NO. 15
CAMERA LOCATIONS

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

NHTSA No.: M10303

Test Program: 2001 NHTSA 35 mph NCAP

Test Date: 02/13/01

No.	Camera View	Location (mm)			Angle (Deg.)	Film Plane to Head	Lens (mm)	Speed (fps)
		X	Y	Z				
1	Right Side, Real Time	3454	10973	1245	0	1651	Zoom	24
2	Left Side, No. 1	1955	-8250	880	-1	7950	13	1030
3	Left Side, No. 2	1455	-8250	1460	-4	7970	35	1020
4	Left Side, No. 3	6495	-10580	4640	-16	11520	70	1000
5	Left Side, No. 4	Did Not Run						
6	Left Side, No. 5	1455	-8250	2700	-13	8060	19	980
7	Right Side, No. 1	1955	8150	730	-1	8520	19	1020
8	Right Side, No. 2	1655	8150	1450	-4	8510	35	1010
9	Right Side, No. 3	7855	8900	2800	-9	N/A	80	910
10	Right Side, No. 4	3460	12650	1410	-2	13030	50	980
11	Overhead Overall	251	0	4460	-86	N/A	13	1020
12	Front View, Driver	-525	-380	2590	-43	N/A	12	940
13	Front View, Passenger	-525	380	2590	-44	N/A	13	1030
14	Pit Camera, Engine	Did Not Run						
15	Pit Camera, Fuel Tank	Did Not Run						
16	Driver Belt	3330	-240	1370	-8	1020	13	520
17	Passenger Belt	3330	280	1370	-8	1180	13	530
18	Left Side Extra	470	-6810	1440	-2	6740	24	1110

X - Barrier Face Y - Monorail Centerline Z - Ground

DATA SHEET NO. 16 **PHOTOGRAPHIC REFERENCE TARGET LOCATIONS**

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup


NHTSA No.: M10303

Test Program: 2001 NHTSA 35 mph NCAP

Test Date: 02/13/01

in mm

Item	Value
A	354
B	911
C	2151
D	605
E	2706
F	155
G	1761
H	2019
I	1367
J	1000
K	1000
L	2099
M	2019
N	7
O	997
P	997
Q	1371

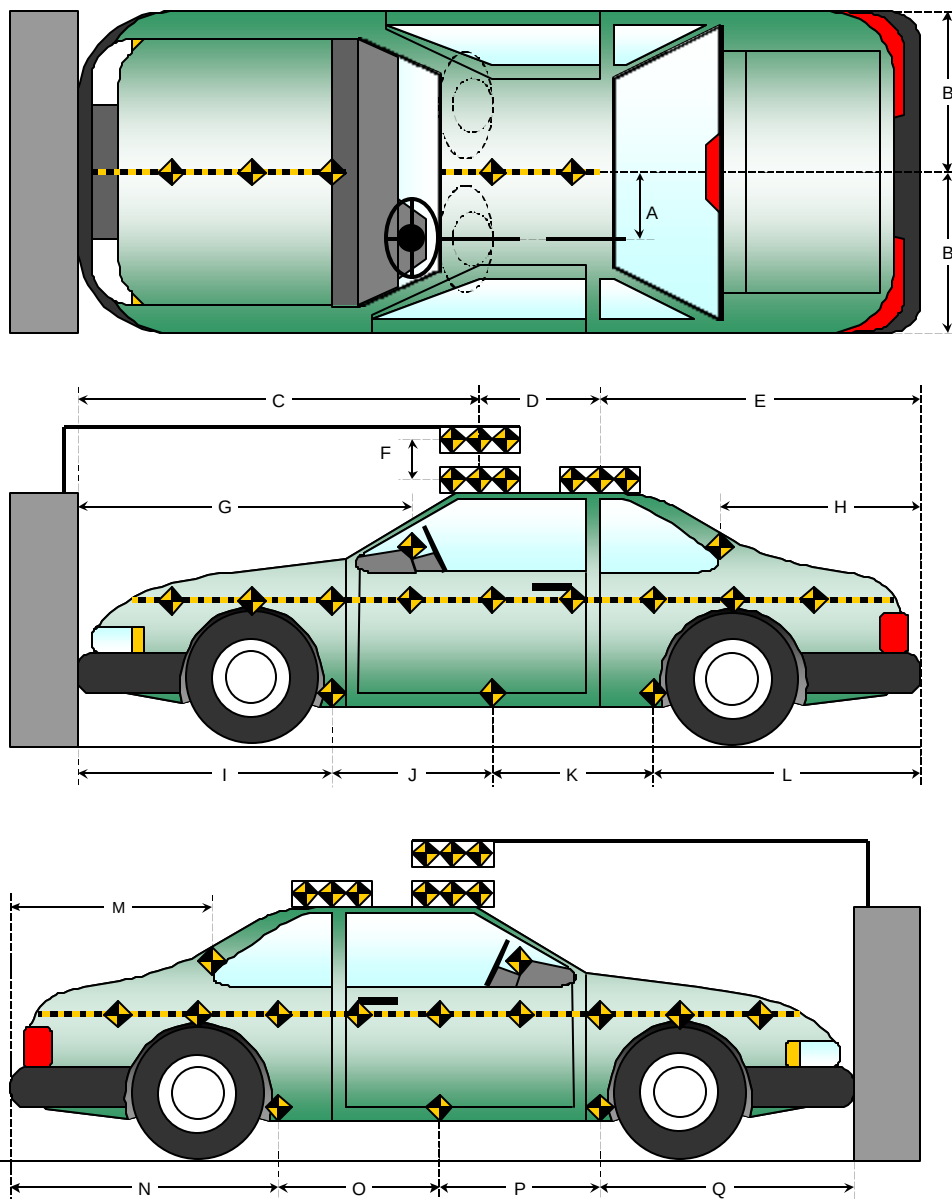

DATA SHEET NO. 17
VEHICLE INTRUSION MEASUREMENTS

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

NHTSA No.: M10303

Test Program: 2001 NHTSA 35 mph NCAP



Test Date: 02/13/01

DOOR OPENING WIDTH

Item	Description	Units	Pre-Test	Post-Test	Difference
A	Left Side Upper	mm	1046	1026	-20
B	Left Side Lower	mm	959	952	-7
D	Right Side Upper	mm	1046	1043	-3
E	Right Side Lower	mm	971	971	0

WHEELBASE MEASUREMENTS

Item	Description	Units	Pre-Test	Post-Test	Difference
C	Left Side Wheel base	mm	3326	3218	-108
F	Right Side Wheel base	mm	3326	3321	-5

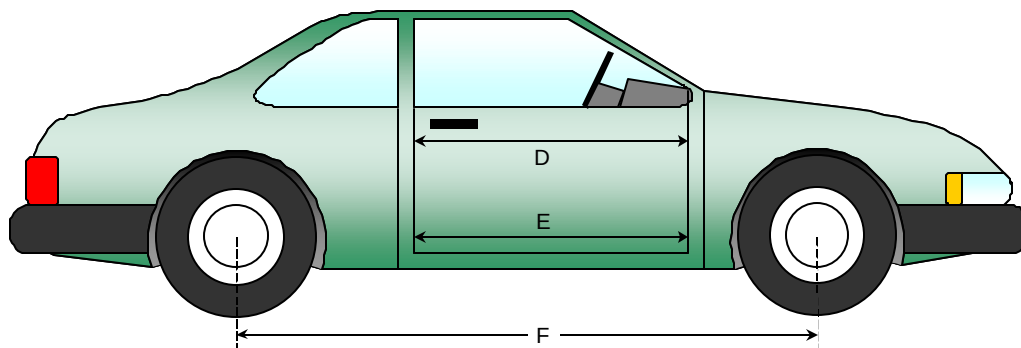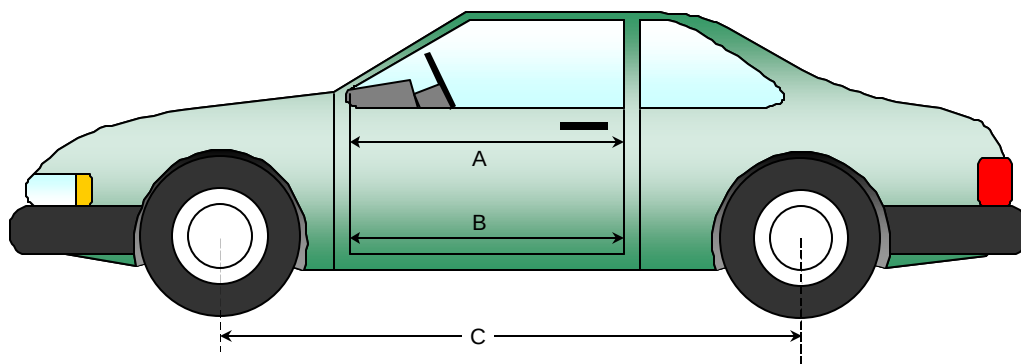

DATA SHEET NO. 17...(CONTINUED)
VEHICLE INTRUSION MEASUREMENTS


Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup
 Test Program: 2001 NHTSA 35 mph NCAP

NHTSA No.: M10303
 Test Date: 02/13/01

DRIVER COMPARTMENT INTRUSION

Item	Description	Units	Pre-Test	Post-Test	Difference
AB	Door Opening (Inside window jam)	mm	1046	1026	-20
CX	Left Knee Bolster to X	mm	278	240	-38
DX	Right Knee Bolster to X	mm	281	250	-31
EX	Brake Pedal to X	mm	537	486	-51
FX	Foot Rest to X	mm	659	543	-116
GX	Center of Steering Wheel Hub to X	mm	45	0	-45

X = Left Front Seat Outboard Anchor Bolt Head

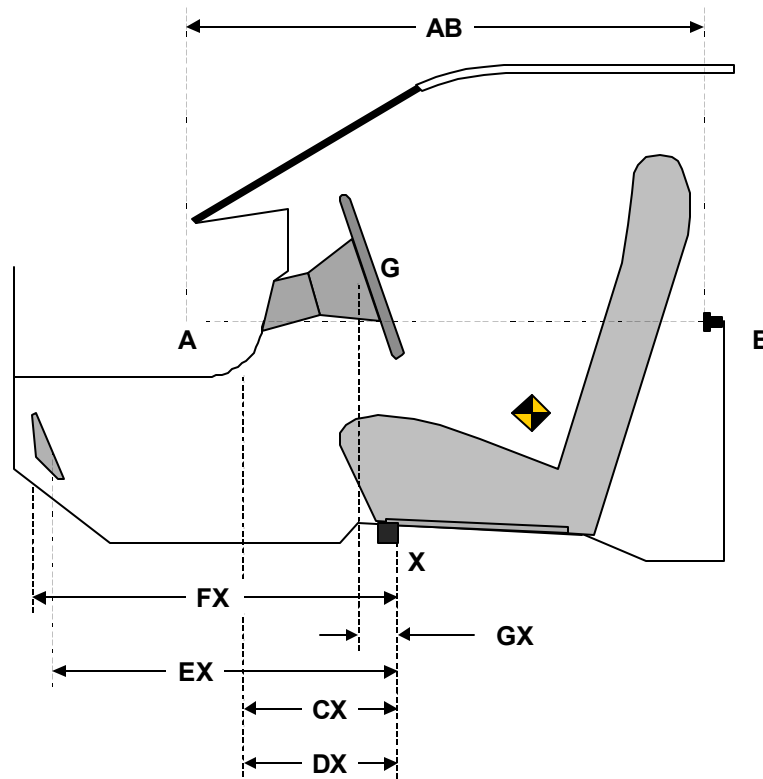


DRIVER COMPARTMENT

DATA SHEET NO. 17...(CONTINUED)
VEHICLE INTRUSION MEASUREMENTS

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup
 Test Program: 2001 NHTSA 35 mph NCAP

NHTSA No.: M10303
 Test Date: 02/13/01

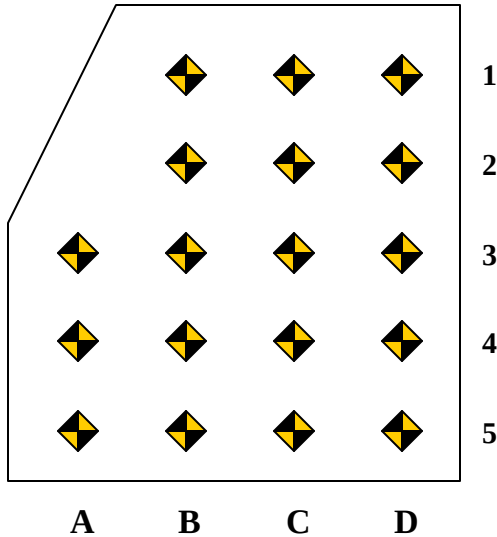

Measurement reference point for X and Z-axis is the forward outboard seat mounting bolt.

Columns A through D are evenly spaced.

Rows 1 and 2 are on the toe kick portion of the floor pan. Rows 3,4, and 5 are located on the most level portion of the floor pan.

Row 3 will be at the intersection of the toe kick and the level sections of the floor pan.

DRIVER FLOOR PAN X-AXIS

	Pre-Test				Post-Test				Difference			
	A	B	C	D	A	B	C	D	A	B	C	D
1		595	602	599		557	566	543		-38	-36	-56
2		515	515	514		496	496	483		-19	-19	-31
3	415	415	415	414	401	397	396	393	-14	-18	-19	-21
4	315	315	315	315	301	297	296	294	-14	-18	-19	-21
5	215	215	215	214	199	197	195	191	-16	-18	-20	-23

DRIVER FLOOR PAN Z-AXIS

	Pre-Test				Post-Test				Difference			
	A	B	C	D	A	B	C	D	A	B	C	D
1		-37	-50	-50		-63	-85	-68		-26	-35	-18
2		-72	-75	-75		-135	-145	-140		-63	-70	-65
3	-85	-85	-85	-80	-134	-150	-163	-144	-49	-65	-78	-64
4	-110	-110	-110	-110	-128	-140	-151	-145	-18	-30	-41	-35
5	-105	-104	-110	-105	-120	-127	-135	-133	-15	-23	-25	-28

DATA SHEET NO. 17...(CONTINUED)
VEHICLE INTRUSION MEASUREMENTS

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup
 Test Program: 2001 NHTSA 35 mph NCAP


NHTSA No.: M10303
 Test Date: 02/13/01

Measurement reference point for X and Z-axis is the forward outboard seat mounting bolt.

Columns A through D are evenly spaced.

Rows 1 and 2 are on the toe kick portion of the floor pan. Rows 3,4, and 5 are located on the most level portion of the floor pan.

Row 3 will be at the intersection of the toe kick and the level sections of the floor pan.

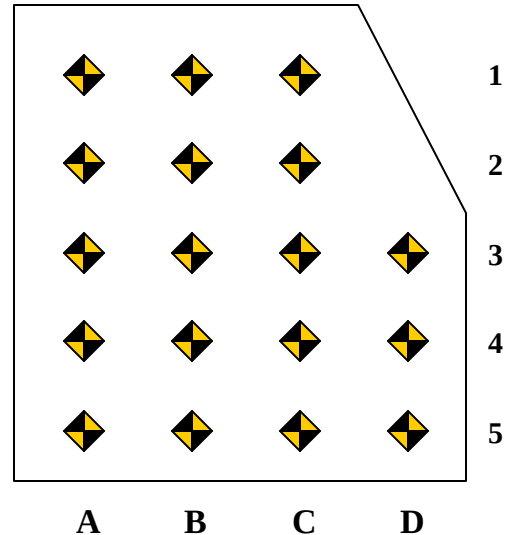

PASSENGER FLOOR PAN X-AXIS

	Pre-Test				Post-Test				Difference			
	A	B	C	D	A	B	C	D	A	B	C	D
1	561	558	556		549	535	534		-12	-23	-22	
2	476	472	472		459	449	451		-17	-23	-21	
3	375	373	375	373	357	351	354	356	-18	-22	-21	-17
4	275	273	275	273	257	253	252	255	-18	-20	-23	-18
5	175	174	173	170	157	152	152	155	-18	-22	-21	-15

PASSENGER FLOOR PAN Z-AXIS


	Pre-Test				Post-Test				Difference			
	A	B	C	D	A	B	C	D	A	B	C	D
1	-31	-49	-73		-97	-85	-85		-66	-36	-12	
2	-75	-95	-95		-140	-128	-105		-65	-33	-10	
3	-79	-99	-98	-87	-153	-148	-130	-98	-74	-49	-32	-11
4	-71	-92	-97	-69	-143	-137	-134	-92	-72	-45	-37	-23
5	-62	-81	-83	-63	-90	-126	-120	-87	-28	-45	-37	-24

DATA SHEET NO. 18
FIXED BARRIER TYPE

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup
 Test Program: 2001 NHTSA 35 mph NCAP

NHTSA No.: M10303
 Test Date: 02/13/01

36 Load Cell Rigid Barrier (NHTSA Standard)
Load Cell Locations on Fixed Barrier

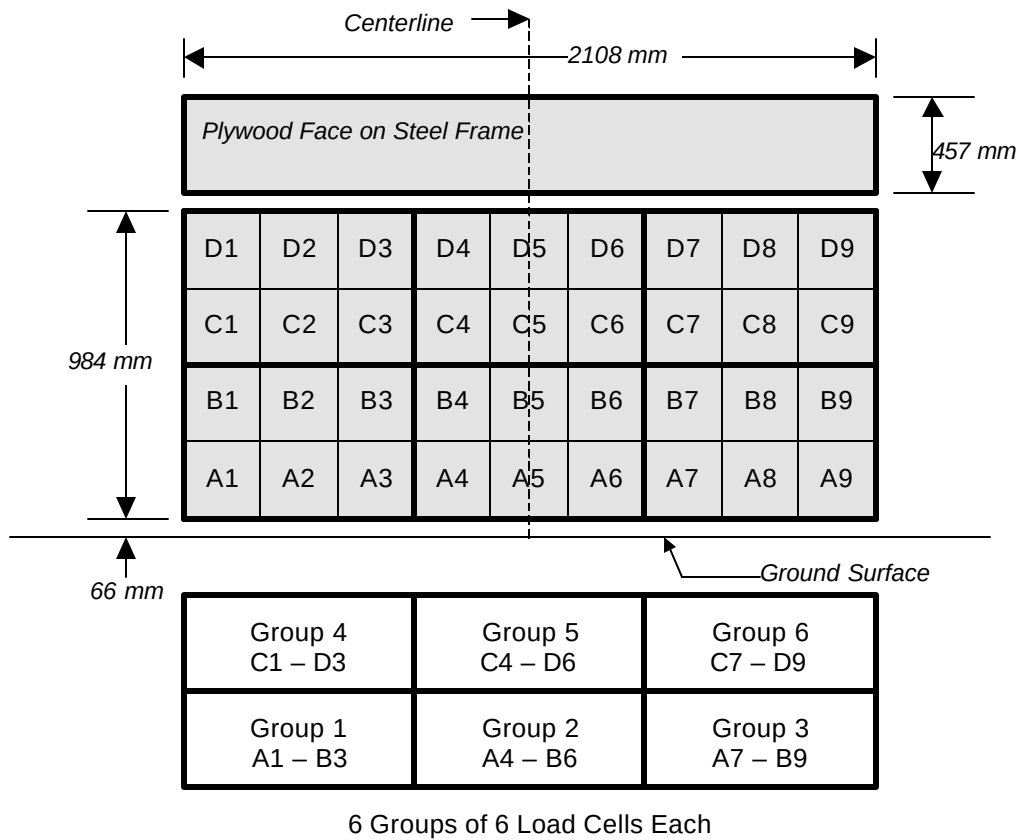

The Data is presented in Appendix C with the following requirements:

- 1.) Data from 36 individual load cells
- 2.) Sum data from 6 groupings shown above (6 cells/group)
- 3.) Total or sum of all 36 individual load cells
- 4.) Sum of all 36 individual load cells vs. vehicle dynamic crush

DATA SHEET NO. 19
ACCIDENT INVESTIGATION DATA

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup
Test Program: 2001 NHTSA 35 mph NCAP

NHTSA No.: M10303
Test Date: 02/13/01

VEHICLE INFORMATION

VIN: 1B7GL2AX115188580
Vehicle Size Category: Quad Cab Pickup

Wheel base (mm): 3326
Test Weight (kg): 2185

ACCELEROMETER DATA


Accelerometer Location: Left rear floor pan
Cal. Procedure/Interval: 6 months / drop test
Integration Algorithm: NHTSA Standard
Impact Velocity (km/h): 55.82
Velocity Change (km/h): 63.24

Linearity: Good
Time of Separation (msec): 79.3

CRUSH PROFILE

Collision Deformation Classification: 12FDEW6 ; Midpoint of Damage: Vehicle Centerline
Damage Region Length (mm): 1621 ; Impact Mode: Full Frontal

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
C1	Crush zone 1 at left side	mm	259	650	-391
C2	Crush zone 2 on left side	mm	33	618	-585
C3	Crush zone 3 on left side	mm	5	618	-613
C4	Crush zone 4 on right side	mm	5	623	-618
C5	Crush zone 5 on right side	mm	33	628	-595
C6	Crush zone 6 at right side	mm	259	732	-473

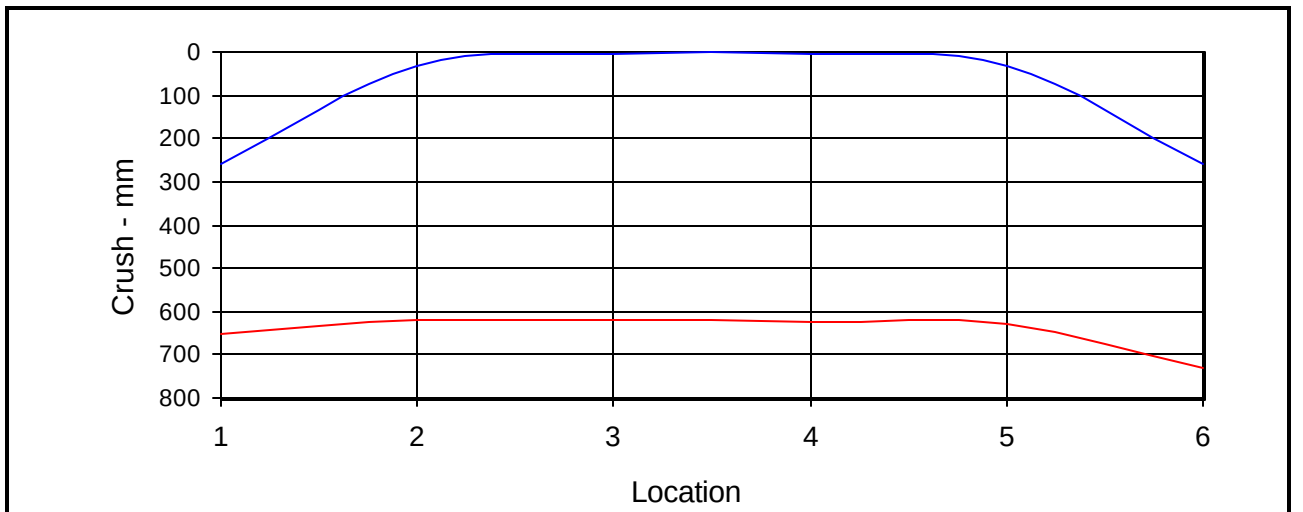

DATA SHEET NO. 20


DUMMY/VEHICLE TEMPERATURE STABILIZATION CHART

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

NHTSA No.: M10303

Test Program: 2001 NHTSA 35 mph NCAP

Test Date: 02/13/01

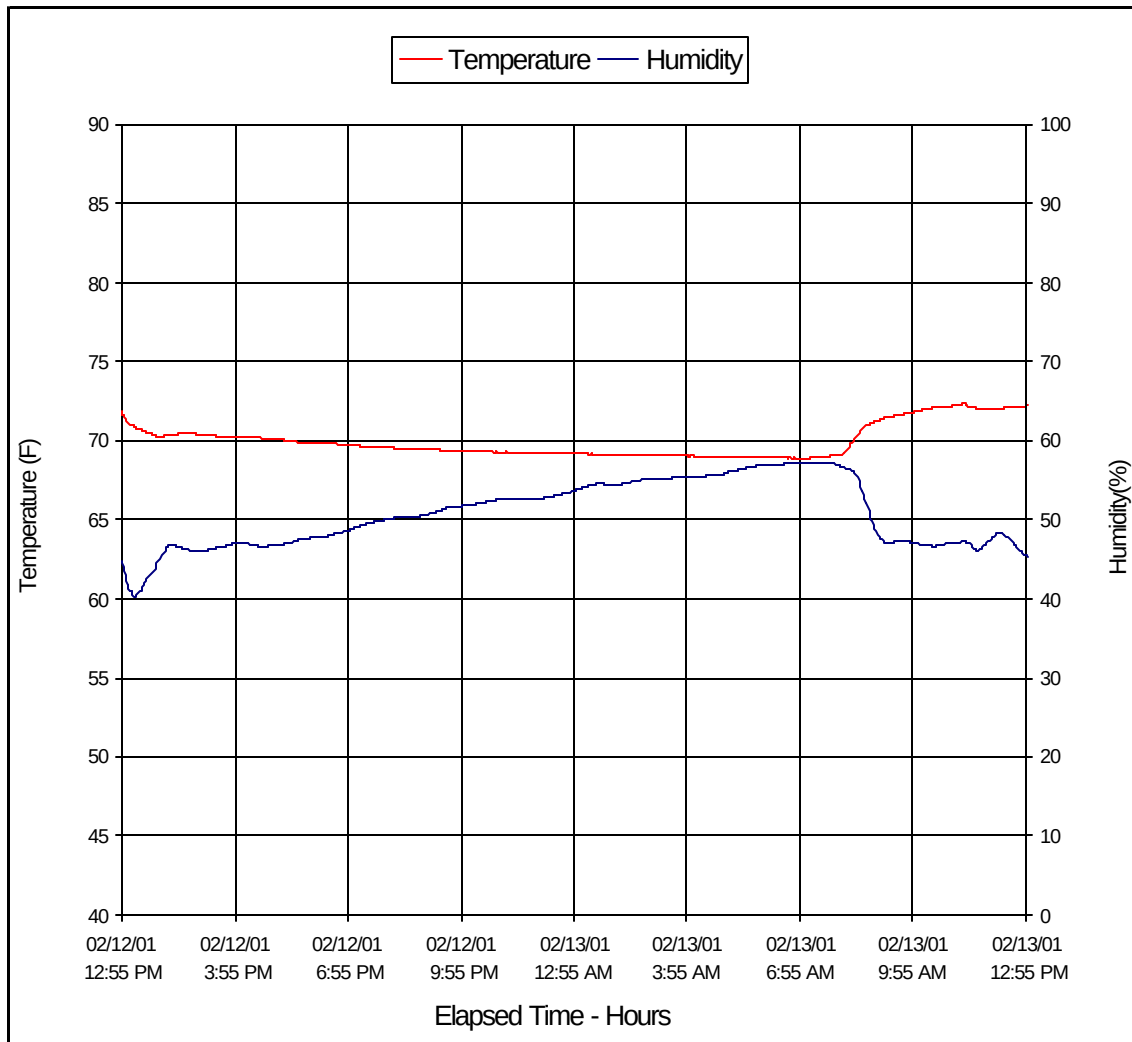

APPENDIX A
PHOTOGRAPHS

LIST OF PHOTOGRAPHS

Figure		Page
A-1	Right Front as Received	A-1
A-2	Left Rear as Received	A-2
A-3	Vehicle Certification Label	A-3
A-4	Vehicle Tire Placard	A-4
A-5	Pre-test Front View	A-5
A-6	Post-test Front View	A-6
A-7	Pre-test Left Side View	A-7
A-8	Post-test Left Side View	A-8
A-9	Pre-test Right Side View	A-9
A-10	Post-test Right Side View	A-10
A-11	Pre-test Right Front View	A-11
A-12	Post-test Right Front View	A-12
A-13	Pre-test Left Rear View	A-13
A-14	Post-test Left Rear View	A-14
A-15	Pre-test Windshield	A-15
A-16	Post-test Windshield	A-16
A-17	Pre-test Engine Compartment	A-17
A-18	Post-test Engine Compartment	A-18
A-19	Pre-test Fuel Cap	A-19
A-20	Post-test Fuel Cap	A-20
A-21	Pre-test Front Underside	A-21
A-22	Post-test Front Underside	A-22
A-23	Pre-test Rear Underside	A-23
A-24	Post-test Rear Underside	A-24
A-25	Pre-test Driver Dummy (Front View)	A-25
A-26	Post-test Driver Dummy (Front View)	A-26
A-27	Pre-test Driver Dummy (Through Window)	A-27
A-28	Post-test Driver Dummy (Through Window)	A-28
A-29	Pre-test Driver Dummy (Door Open)	A-29
A-30	Post-test Driver Dummy (Door Open)	A-30
A-31	Pre-test Driver Dummy (90° To Vehicle)	A-31
A-32	Post-test Driver Dummy (90° to Vehicle)	A-32

LIST OF PHOTOGRAPHS...(Continued)

Figure		Page
A-33	Pre-test Driver Dummy Feet	A-33
A-34	Post-test Driver Dummy Feet and Knee Contact	A-34
A-35	Pre-test Driver Side Knee Bolster	A-35
A-36	Post-test Driver Side Knee Bolster	A-36
A-37	Pre-test Driver Side Floor pan	A-37
A-38	Post-test Driver Side Floor pan	A-38
A-39	Post-test Driver Head	A-39
A-40	Post-test Driver Dummy Contact	A-40
A-41	Pre-test Passenger Dummy (Front View)	A-41
A-42	Post-test Passenger Dummy (Front View)	A-42
A-43	Pre-test Passenger Dummy (Through Window)	A-43
A-44	Post-test Passenger Dummy (Through Window)	A-44
A-45	Pre-test Passenger Dummy (Door Open)	A-45
A-46	Post-test Passenger Dummy (Door Open)	A-46
A-47	Pre-test Passenger Dummy (90° to Vehicle)	A-47
A-48	Post-test Passenger Dummy (90° to Vehicle)	A-48
A-49	Pre-test Passenger Dummy Feet	A-49
A-50	Post-test Driver Passenger Feet and Contact Point	A-50
A-51	Pre-test Passenger Side Floor Pan	A-51
A-52	Post-test Passenger Side Floor Pan	A-52
A-53	Pre-test Passenger Side Knee Bolster	A-53
A-54	Post-test Passenger Side Knee Bolster and Dummy Contact	A-54
A-55	Post-test Passenger Head	A-55
A-56	Post-test Passenger Dummy Contact	A-56
A-57	Vehicle on Rollover Device	A-57
A-58	Vehicle During Impact	A-58



Figure A-1: Right Front, as Received



Figure A-2: Left Rear, as Received



Figure A-3: Vehicle Certification Label

MFD BY DAIMLERCHRYSLER CORPORATION DATE OF MFR 10-00 GWR 2559 KG(05640 LB)

GWR FRONT	WITH TIRES	RIMS AT	COLD
1407 KG(3100 LB)	P215/75R15	15X7	241 KPA(35 PSI)
GWR REAR	WITH TIRES	RIMS AT	COLD
1437 KG(3166 LB)	P215/75R15	15X7	241 KPA(35 PSI)

THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY AND THEFT PREVENTION STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.

VIN: 1B7GL2AX11S188580 TYPE: TRUCK SINGLE X DUAL



MDH: 102518 924AA PNT:PW7 VEHICLE MADE IN U.S.A. TRM:P9DU 4648503

Figure A-4: Vehicle Tire Label



Figure A-5: Front View, Pre-Test



Figure A-6: Front View, Post-Test



Figure A-7: Left Side View, Pre-Test



Figure A-8: Left Side View, Post-Test



Figure A-9: Right Side View, Pre-Test



Figure A-10: Right Side View, Post-Test



Figure A-11: Right Front View, Pre-Test



Figure A-12: Right Front View, Post-Test



Figure A-13: Left Rear View, Pre-Test



Figure A-14: Left Rear View, Post-Test

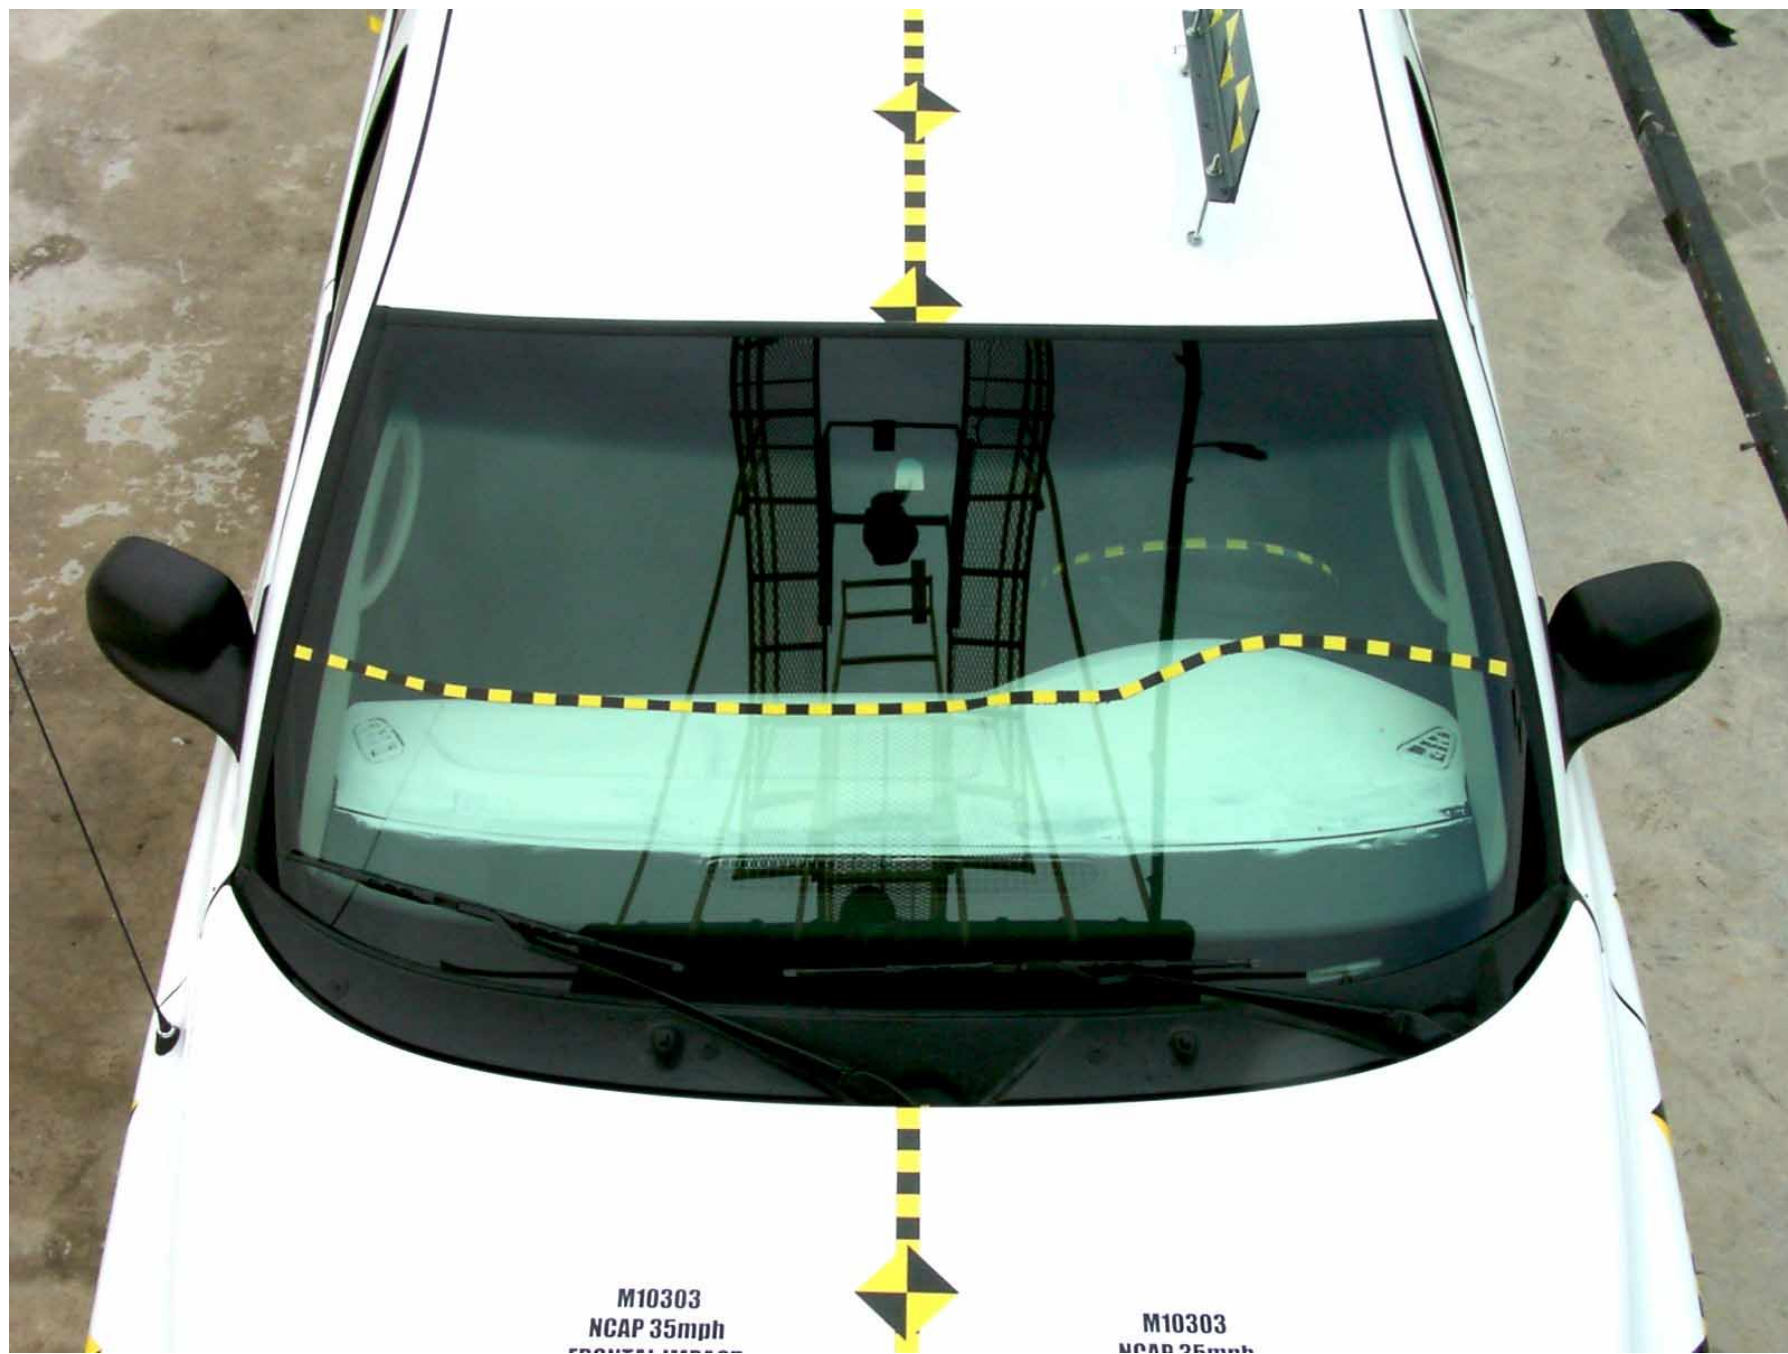


Figure A-15: Windshield, Pre-Test

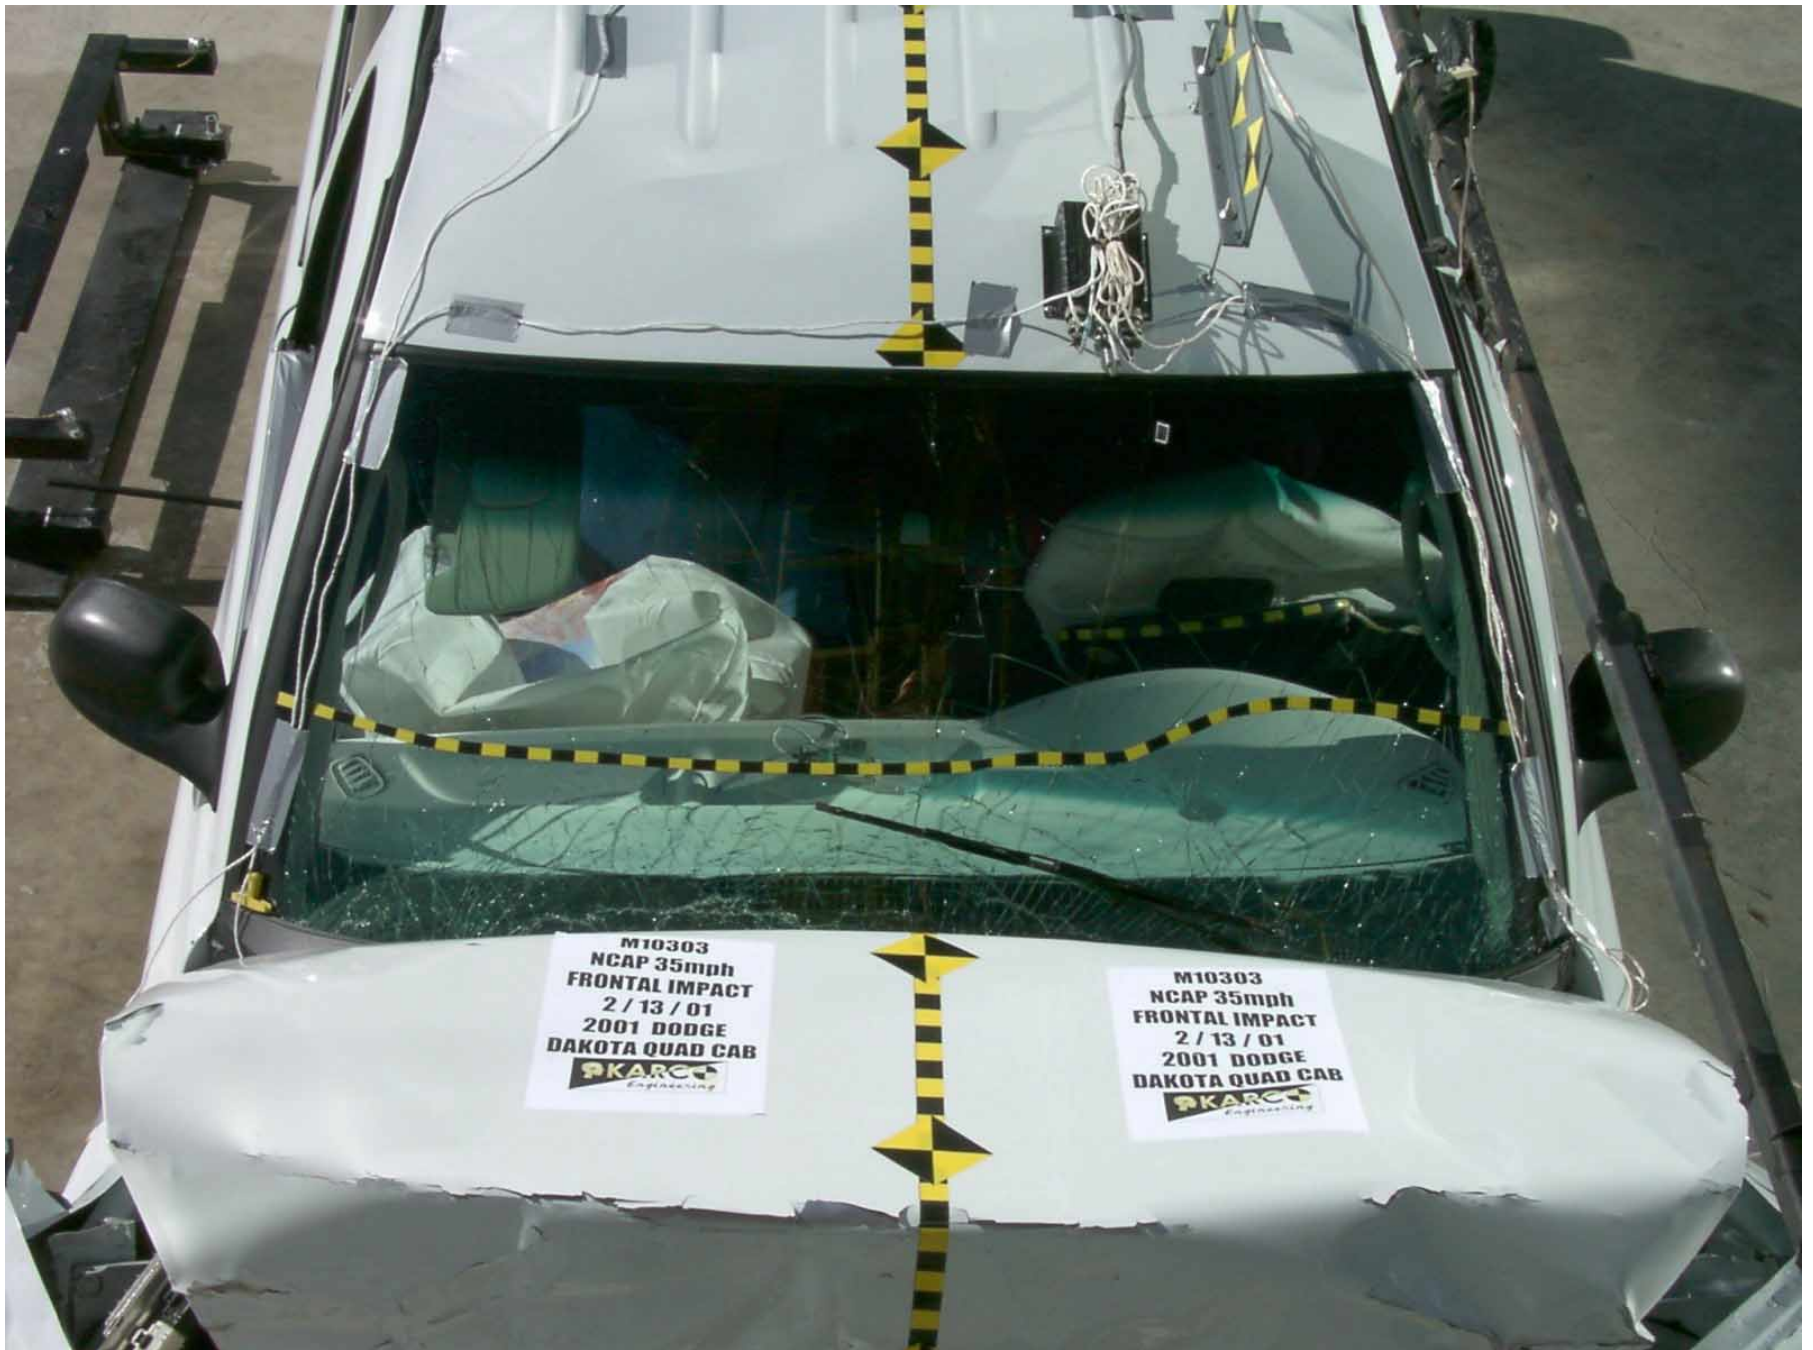


Figure A-16: Windshield, Post-Test

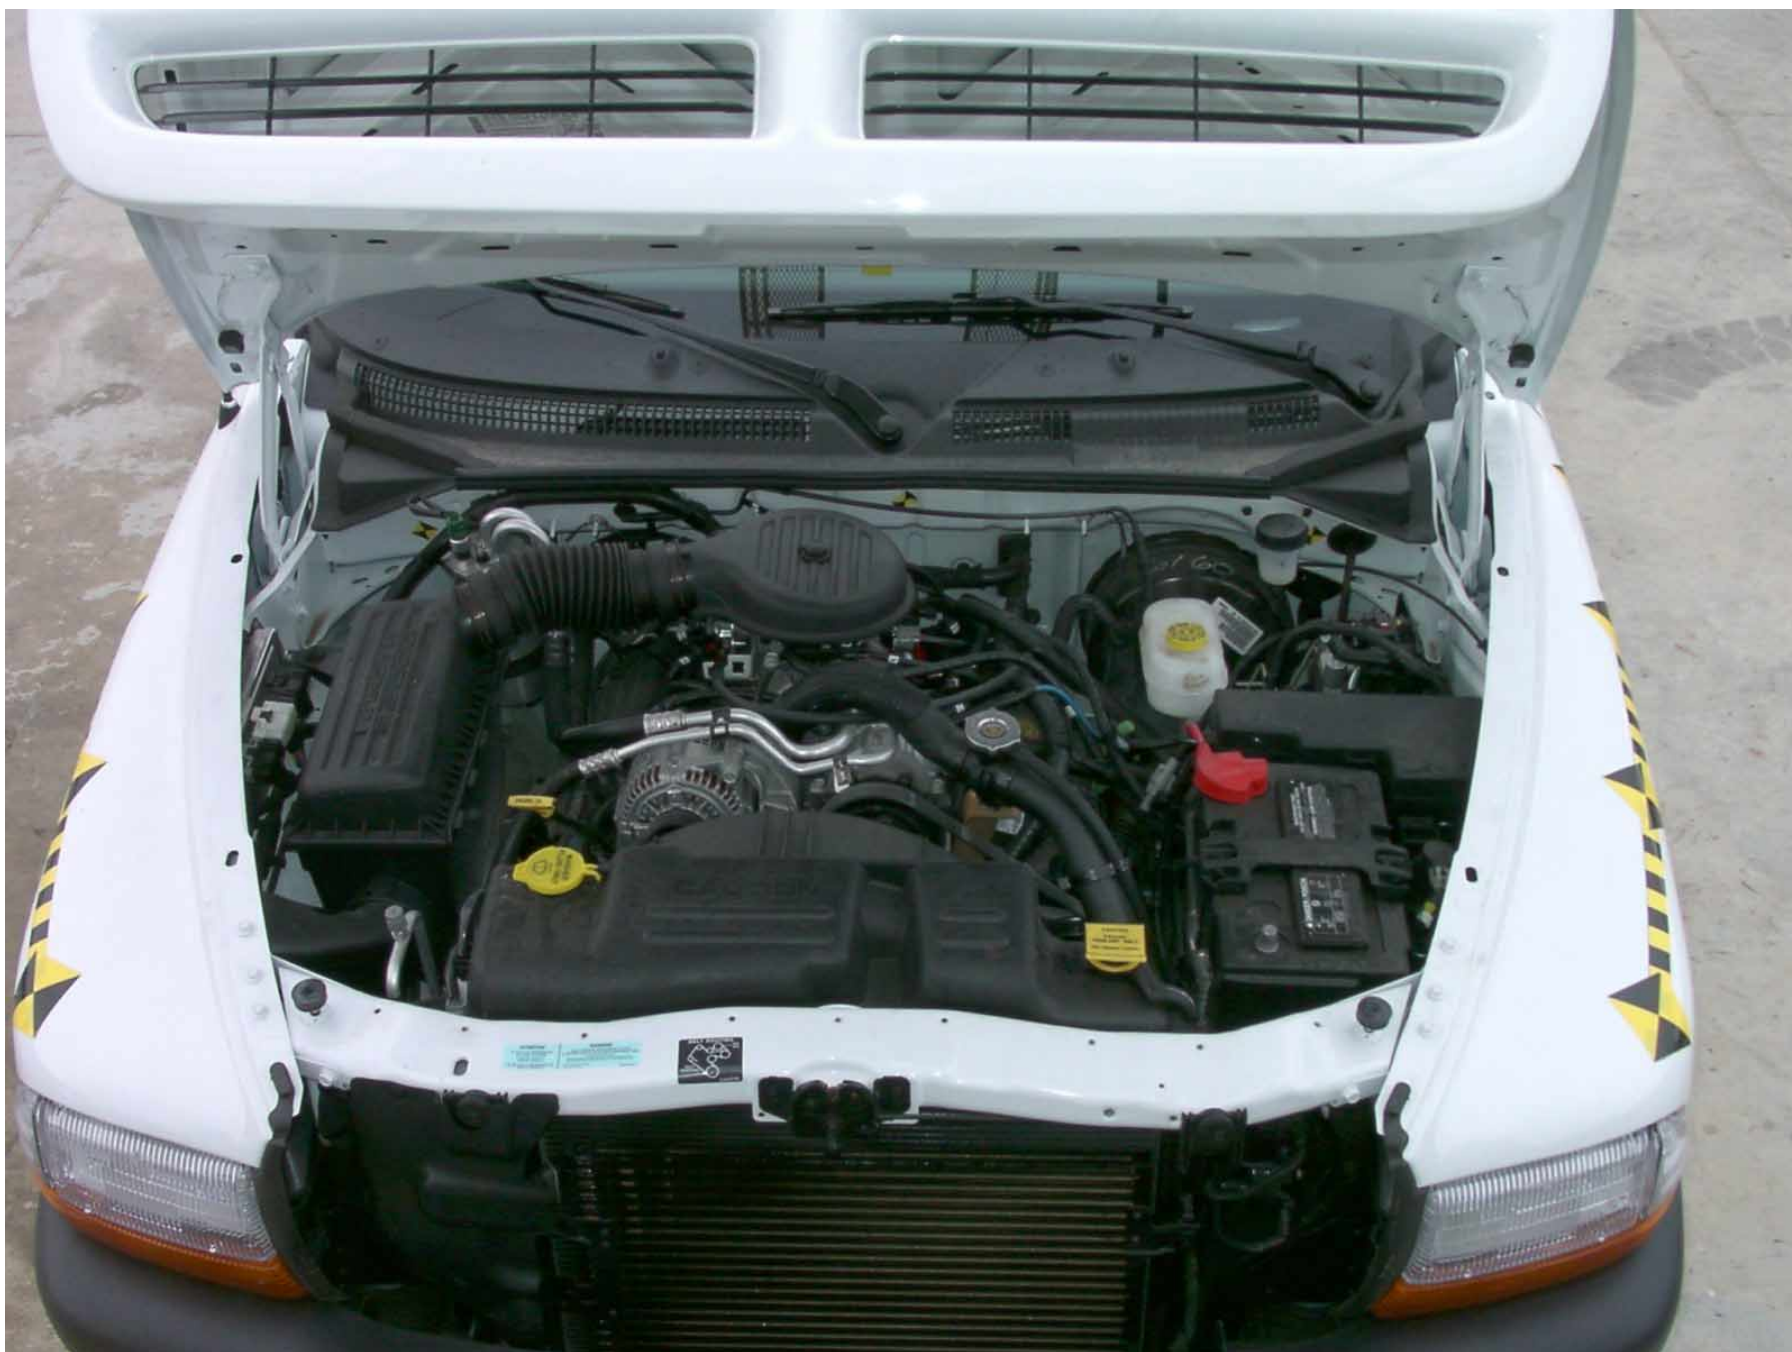


Figure A-17: Engine Compartment, Pre-Test

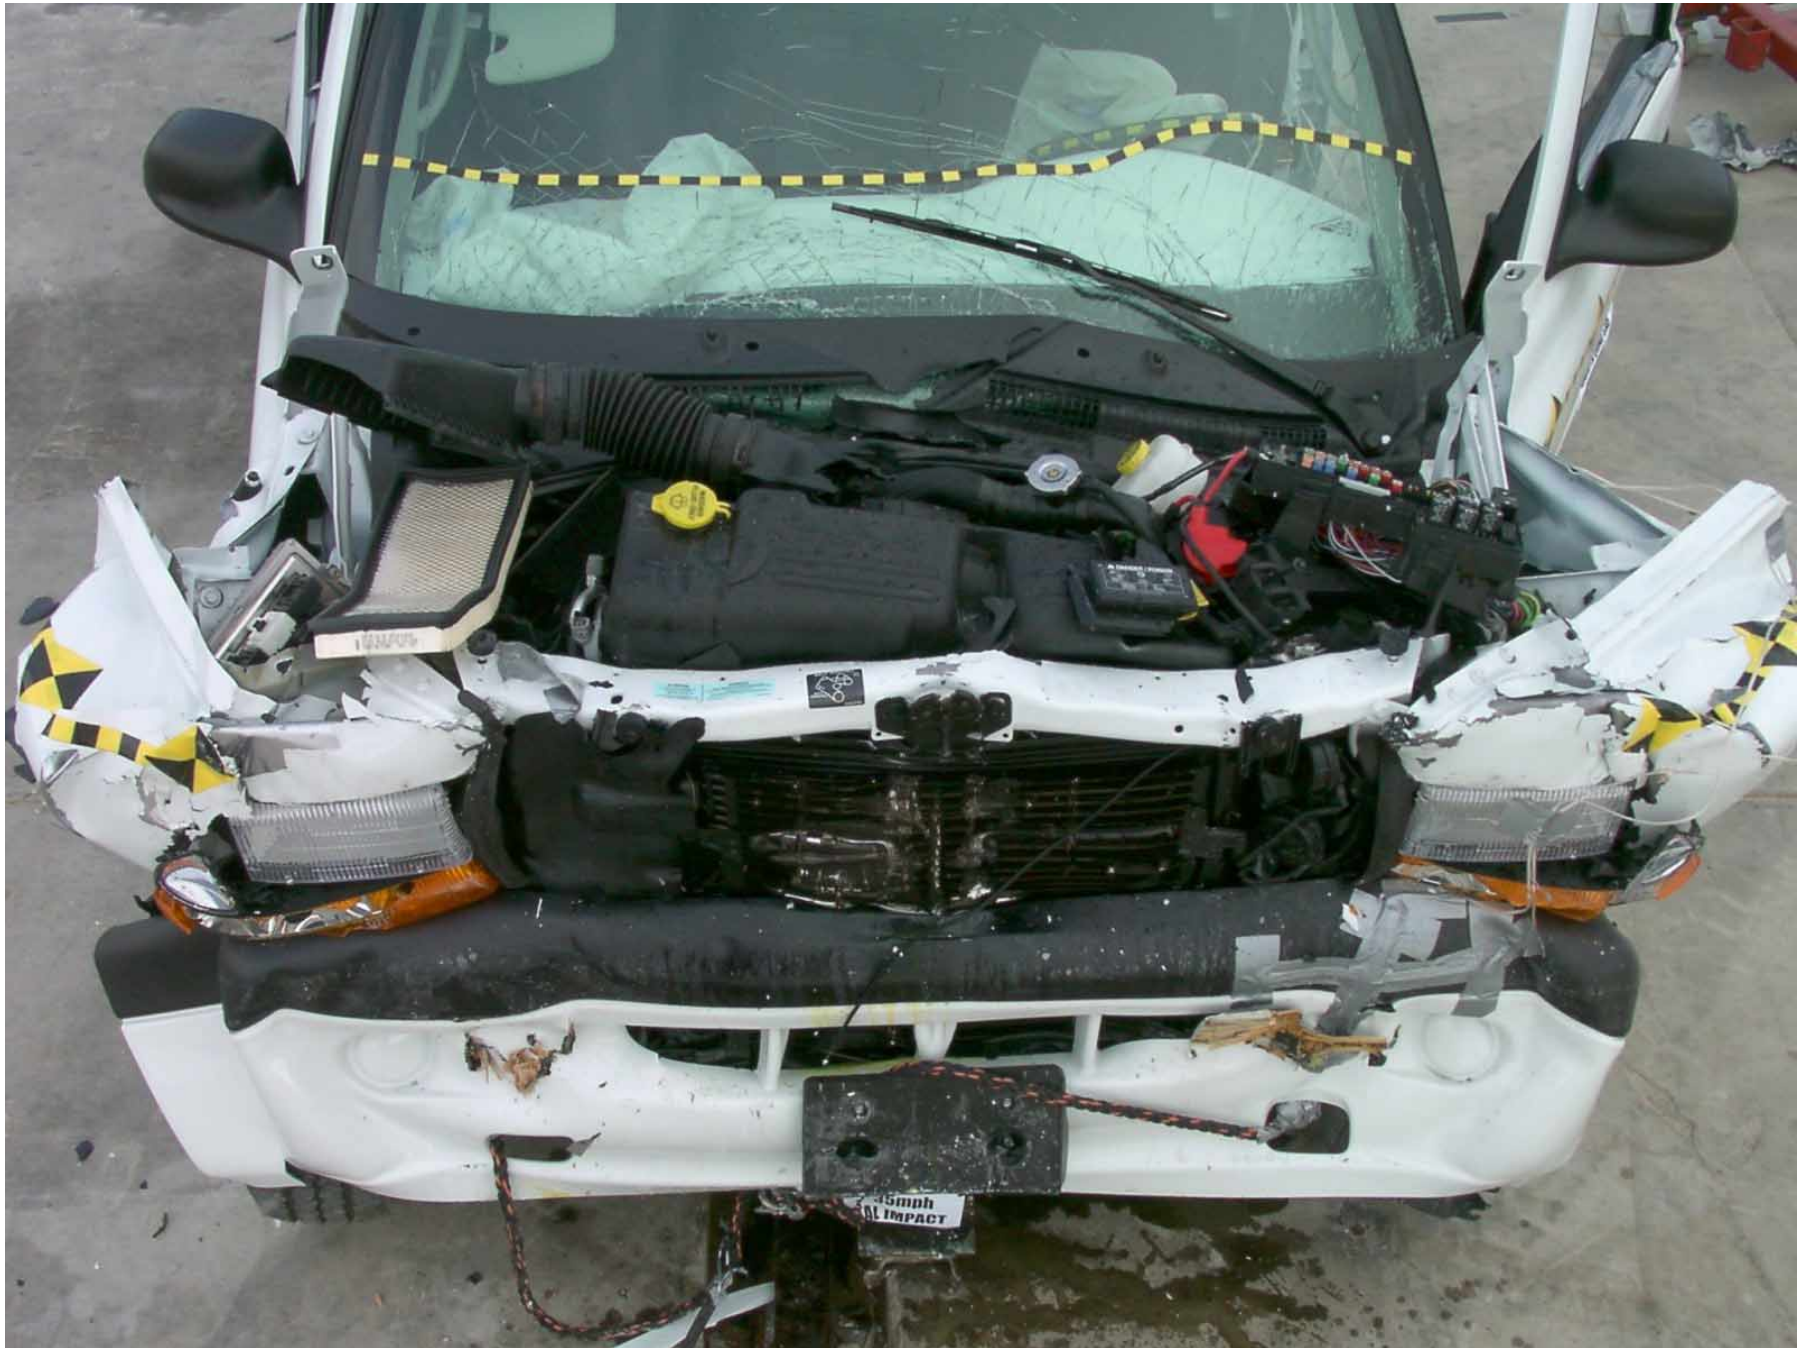


Figure A-18: Engine Compartment, Post-Test



Figure A-19: Fuel Cap, Pre-test



Figure A-20: Fuel Cap, Post-Test

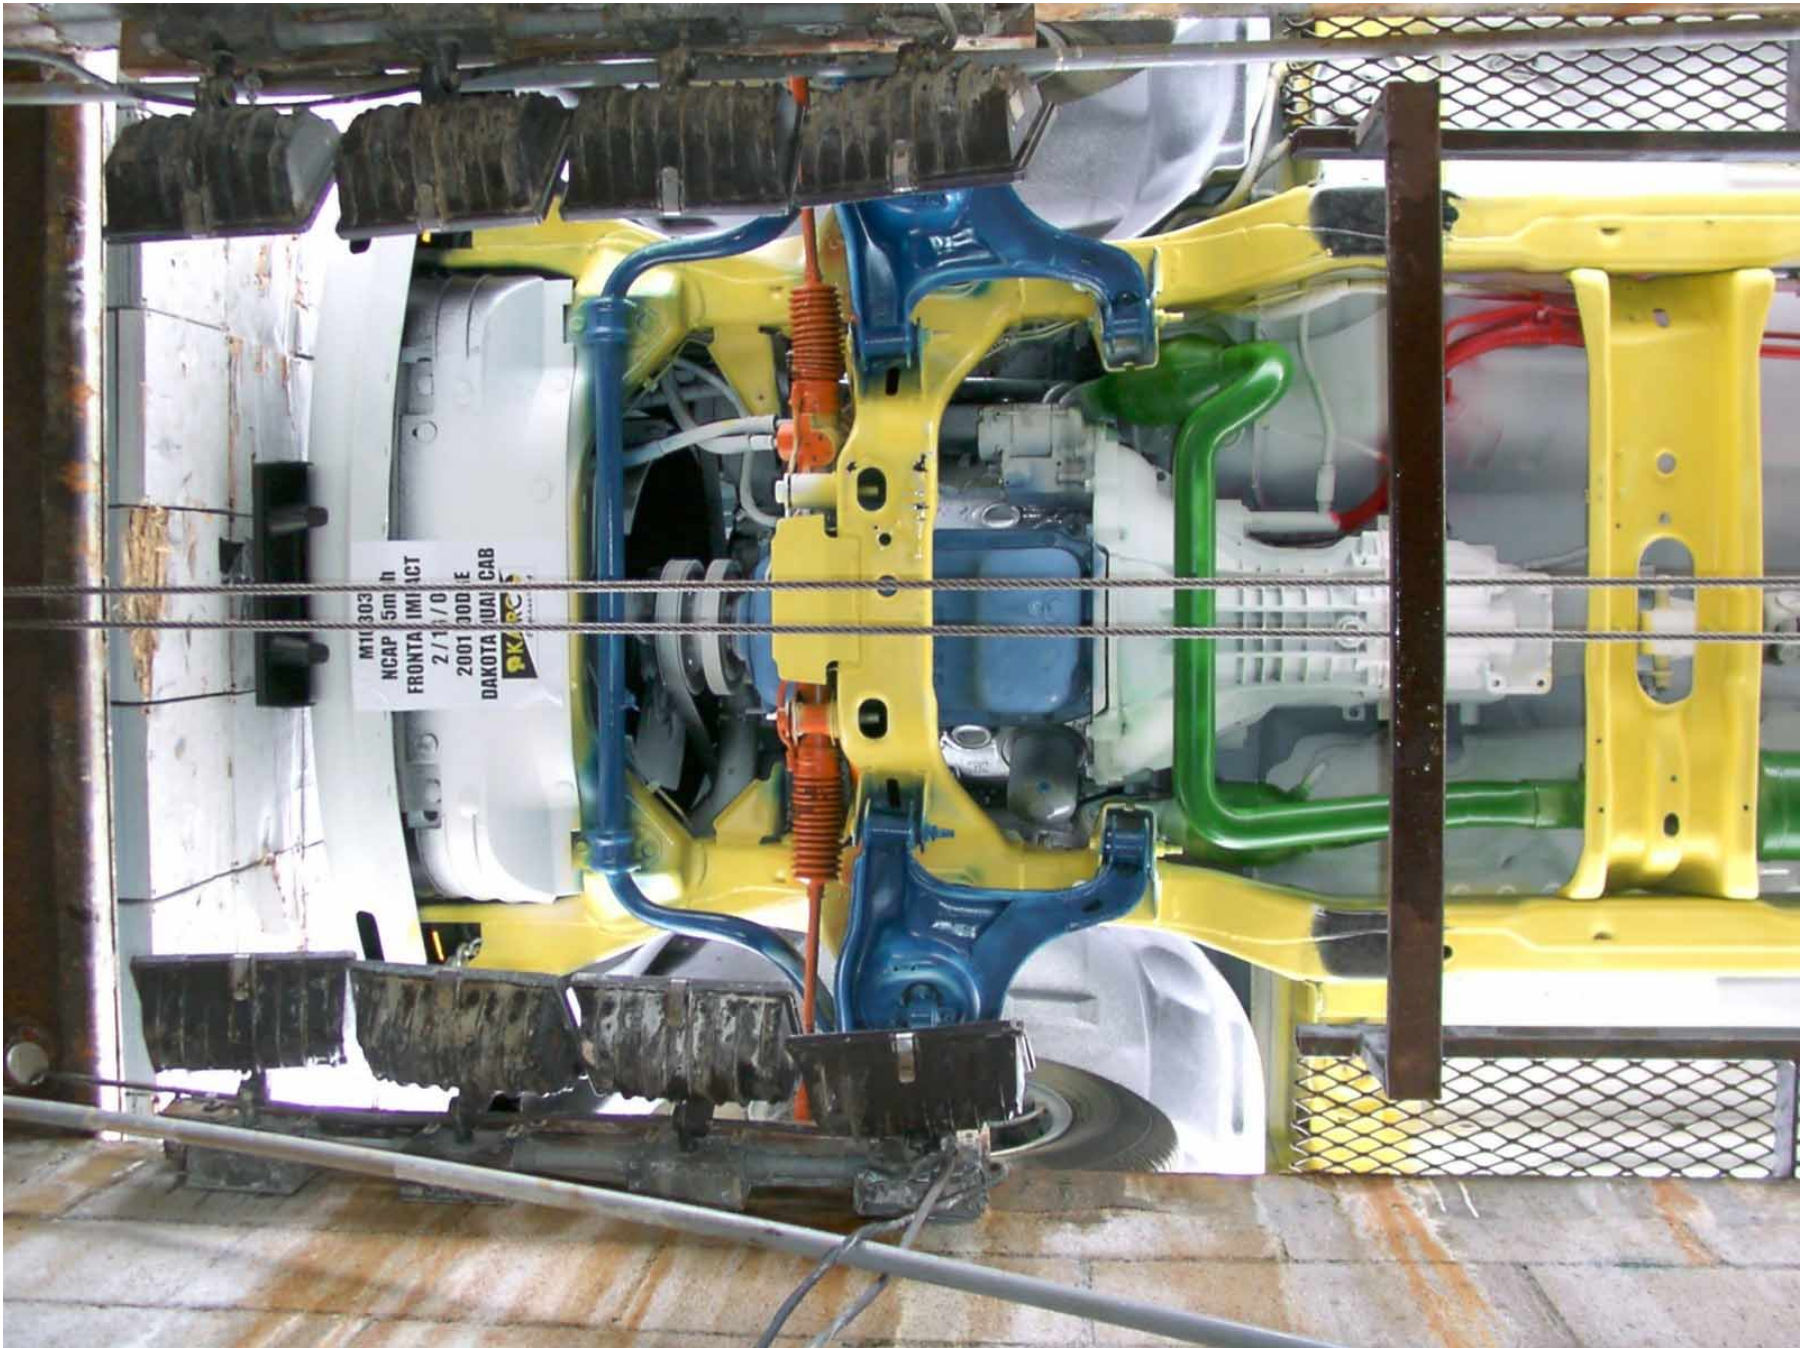


Figure A-21: Front Underside, Pre-Test

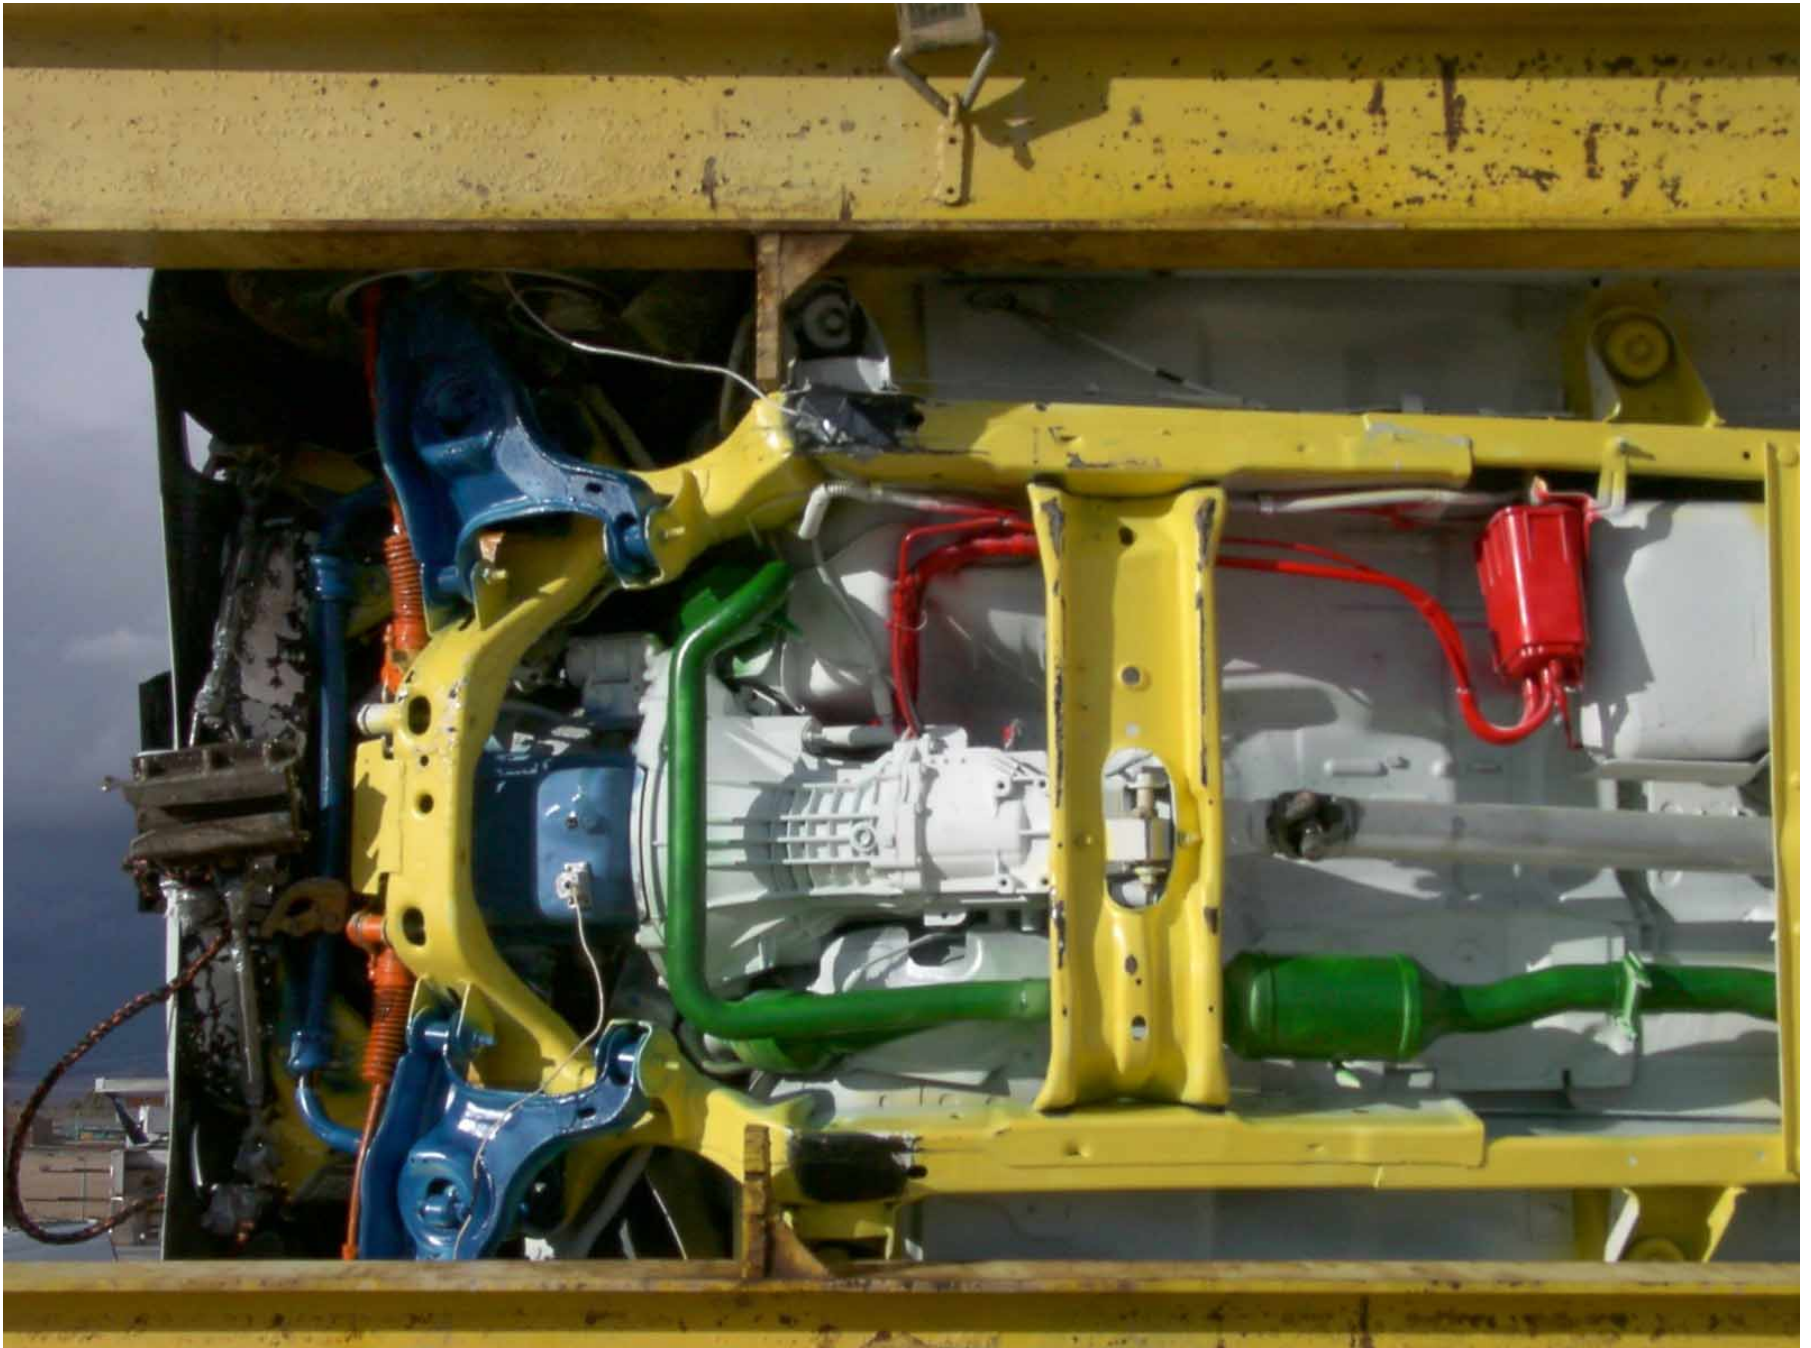


Figure A-22: Front Underside, Post-Test

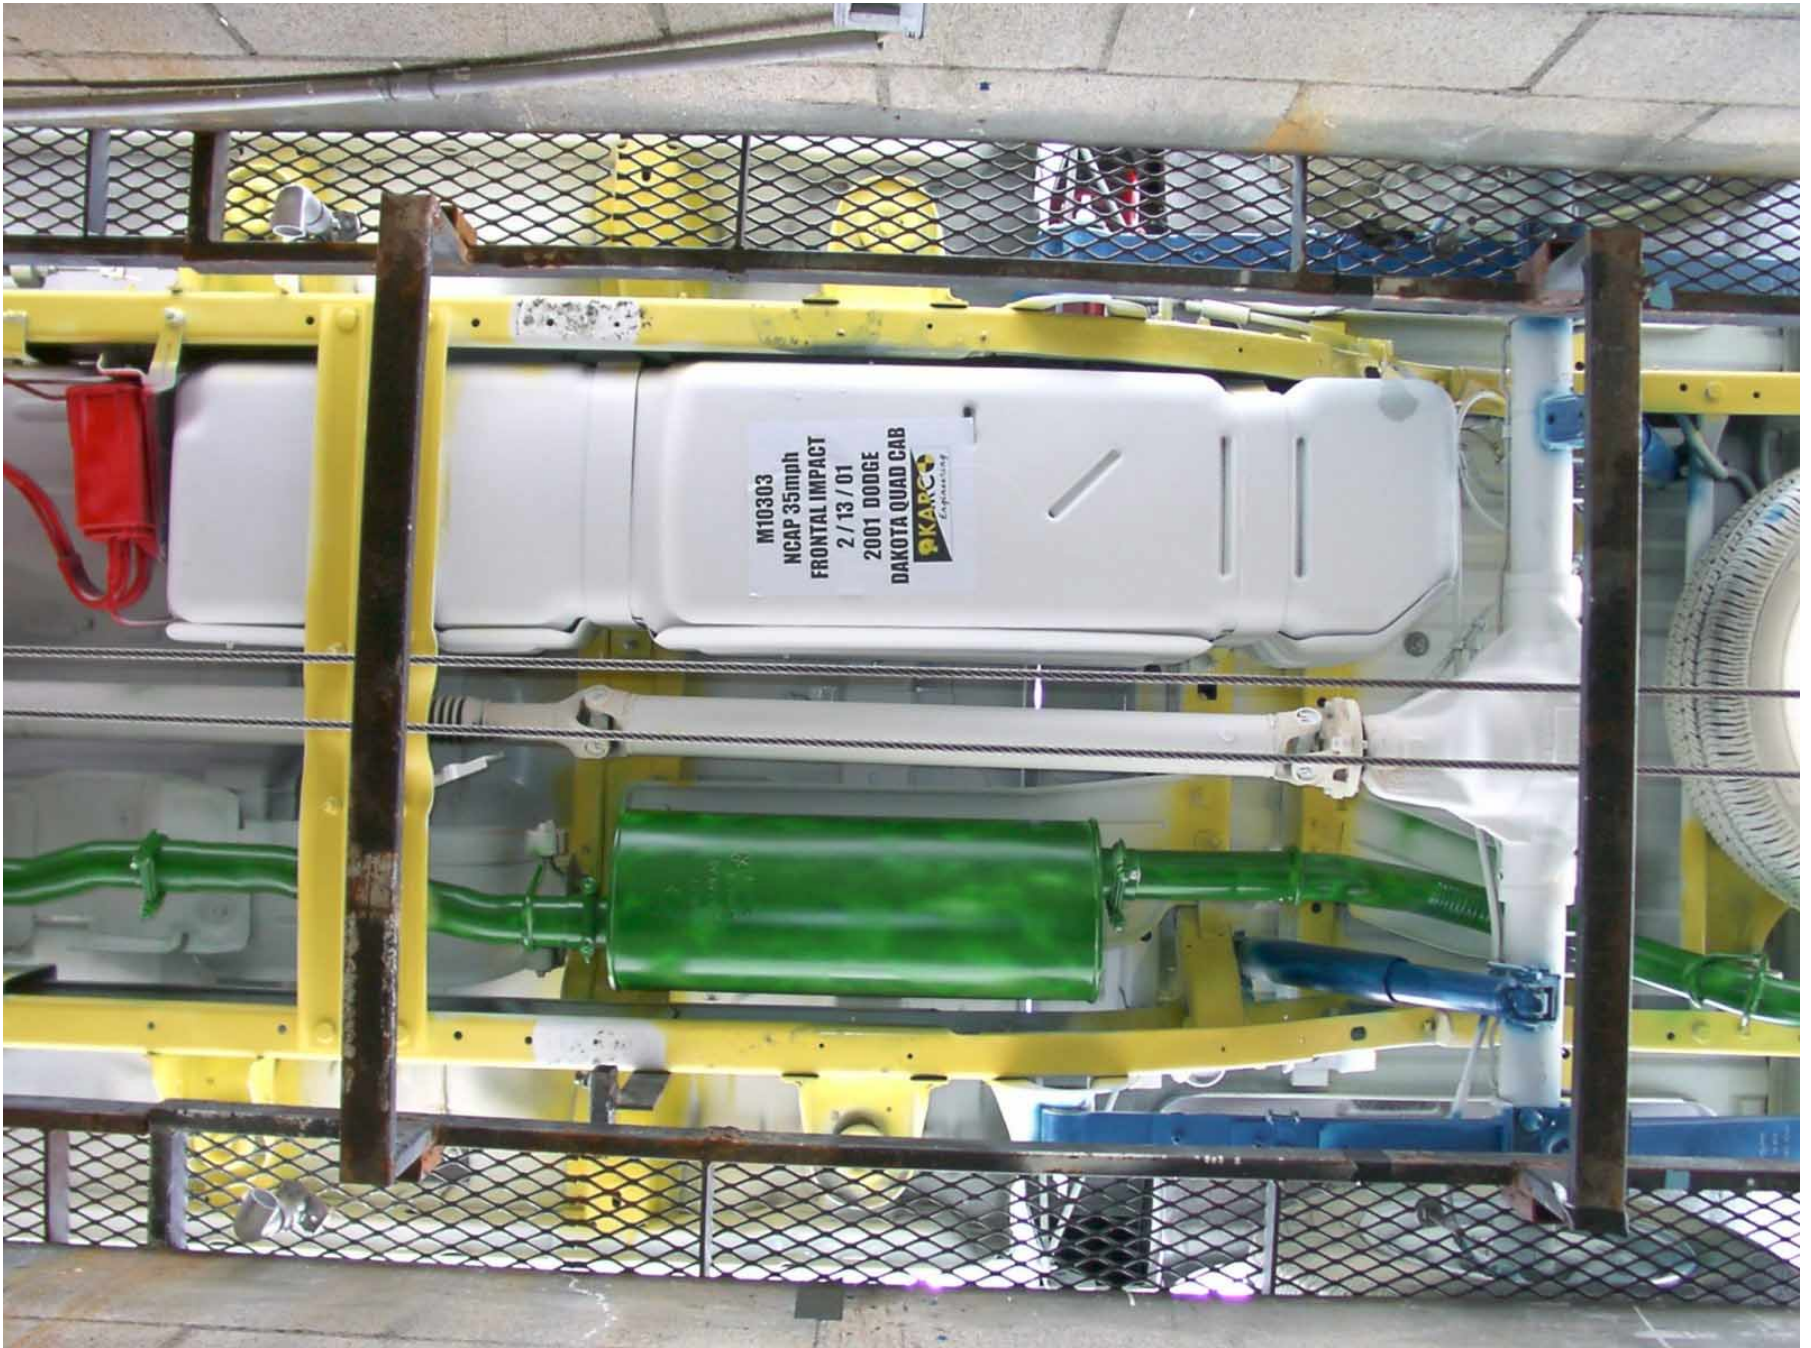


Figure A-23: Rear Underside, Pre-Test



Figure A-24: Rear Underside, Post-Test

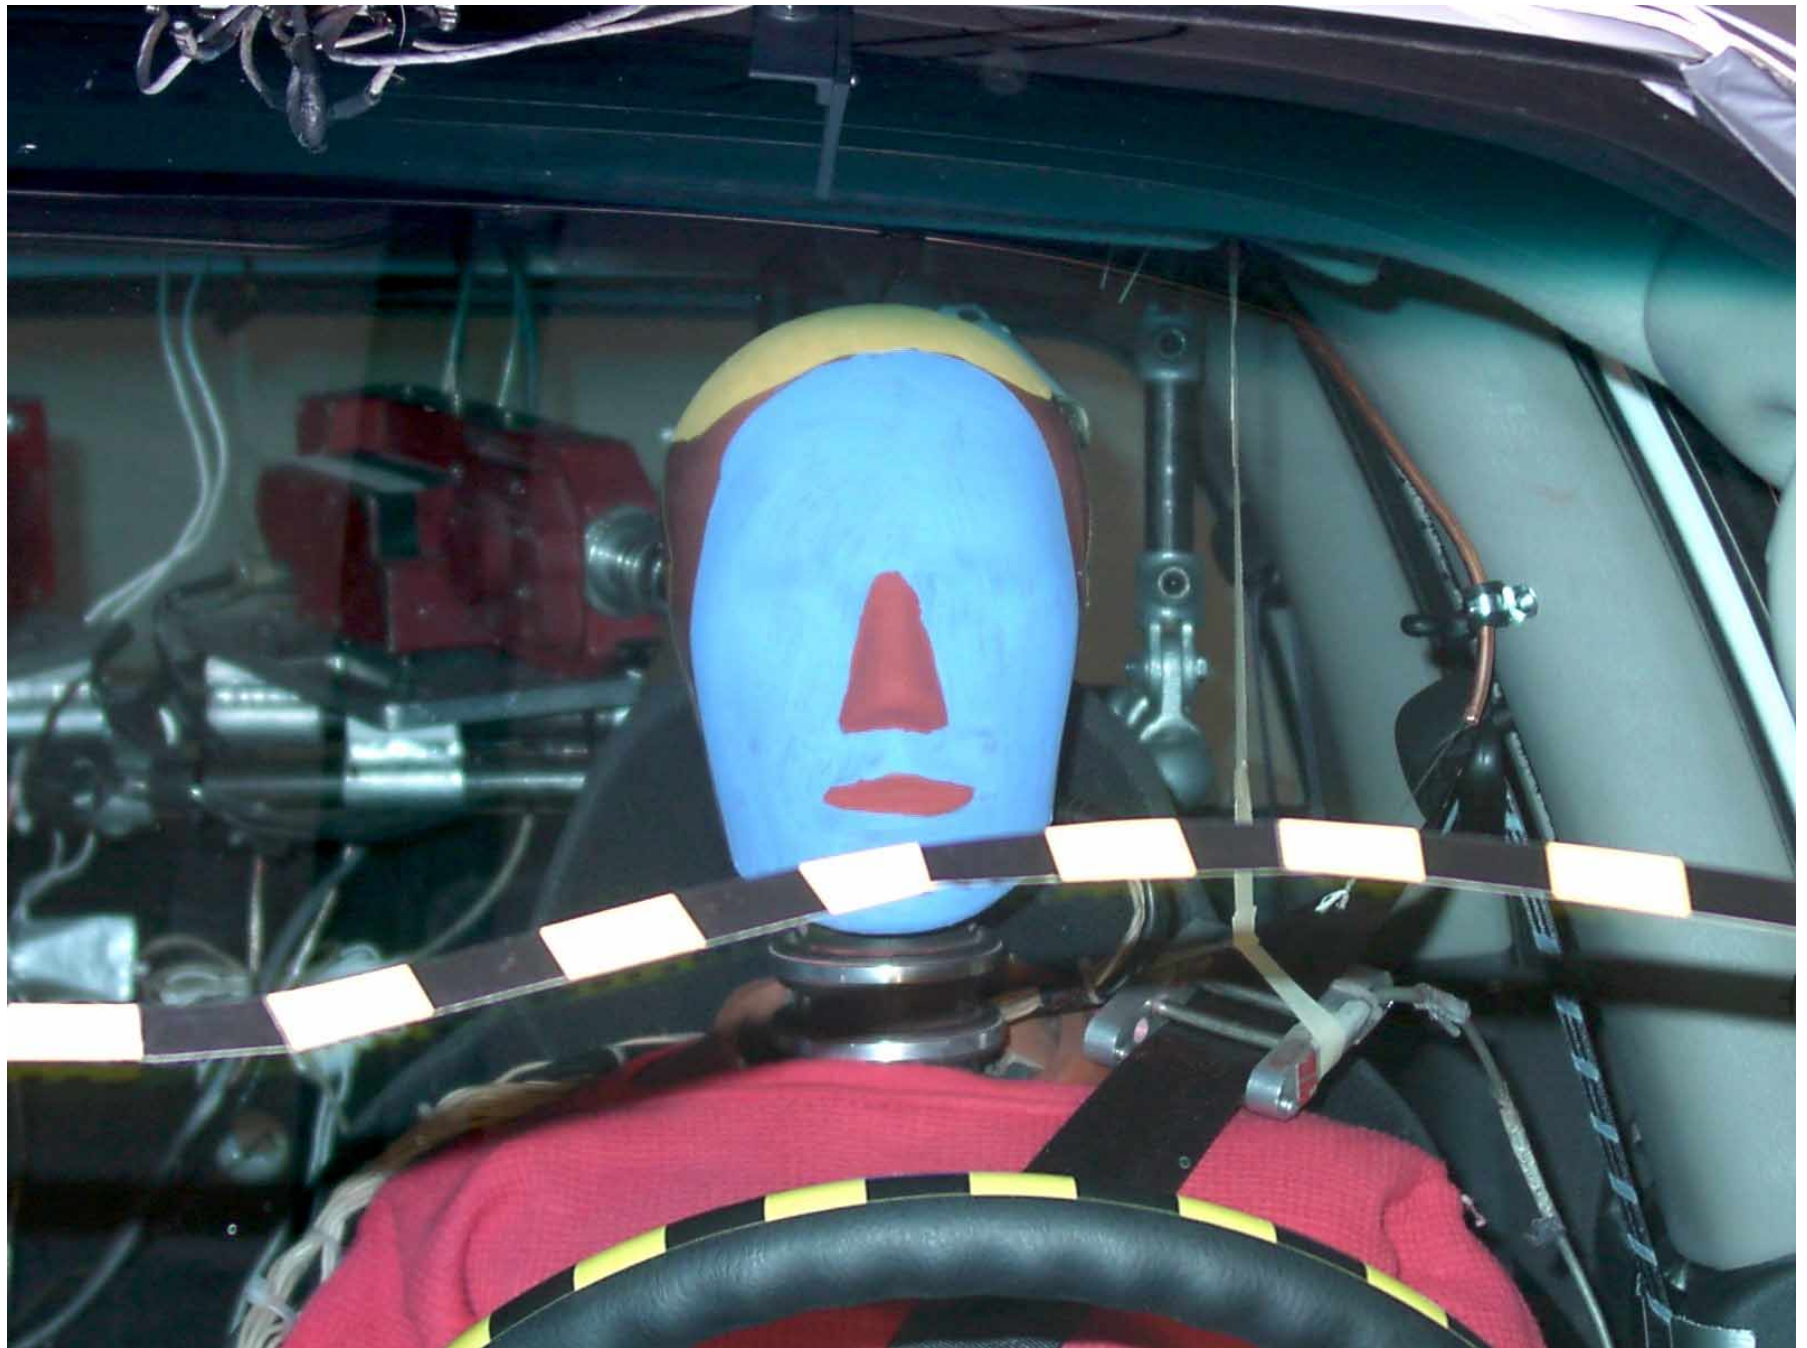


Figure A-25: Driver Dummy Front View, Pre-Test



Figure A-26: Driver Dummy Front View, Post-Test



Figure A-27: Driver Dummy Through Window, Pre-Test



Figure A-28: Driver Dummy Through Window, Post-Test



Figure A-29: Driver Dummy Door Open, Pre-Test



Figure A-30: Driver Dummy Door Open, Post-Test



Figure A-31: Driver Dummy 90° To Vehicle, Pre-Test



Figure A-32: Driver Dummy 90° To Vehicle, Post-Test



Figure A-33: Driver Dummy Feet, Pre-Test



Figure A-34: Driver Dummy Feet and Knee Contact, Post-Test



Figure A-35: Driver Side Knee Bolster, Pre-Test



Figure A-36: Driver Side Knee Bolster, Post-Test



Figure A-37: Driver Side Floor Pan, Pre-Test



Figure A-38: Driver Side Floor Pan, Post-Test

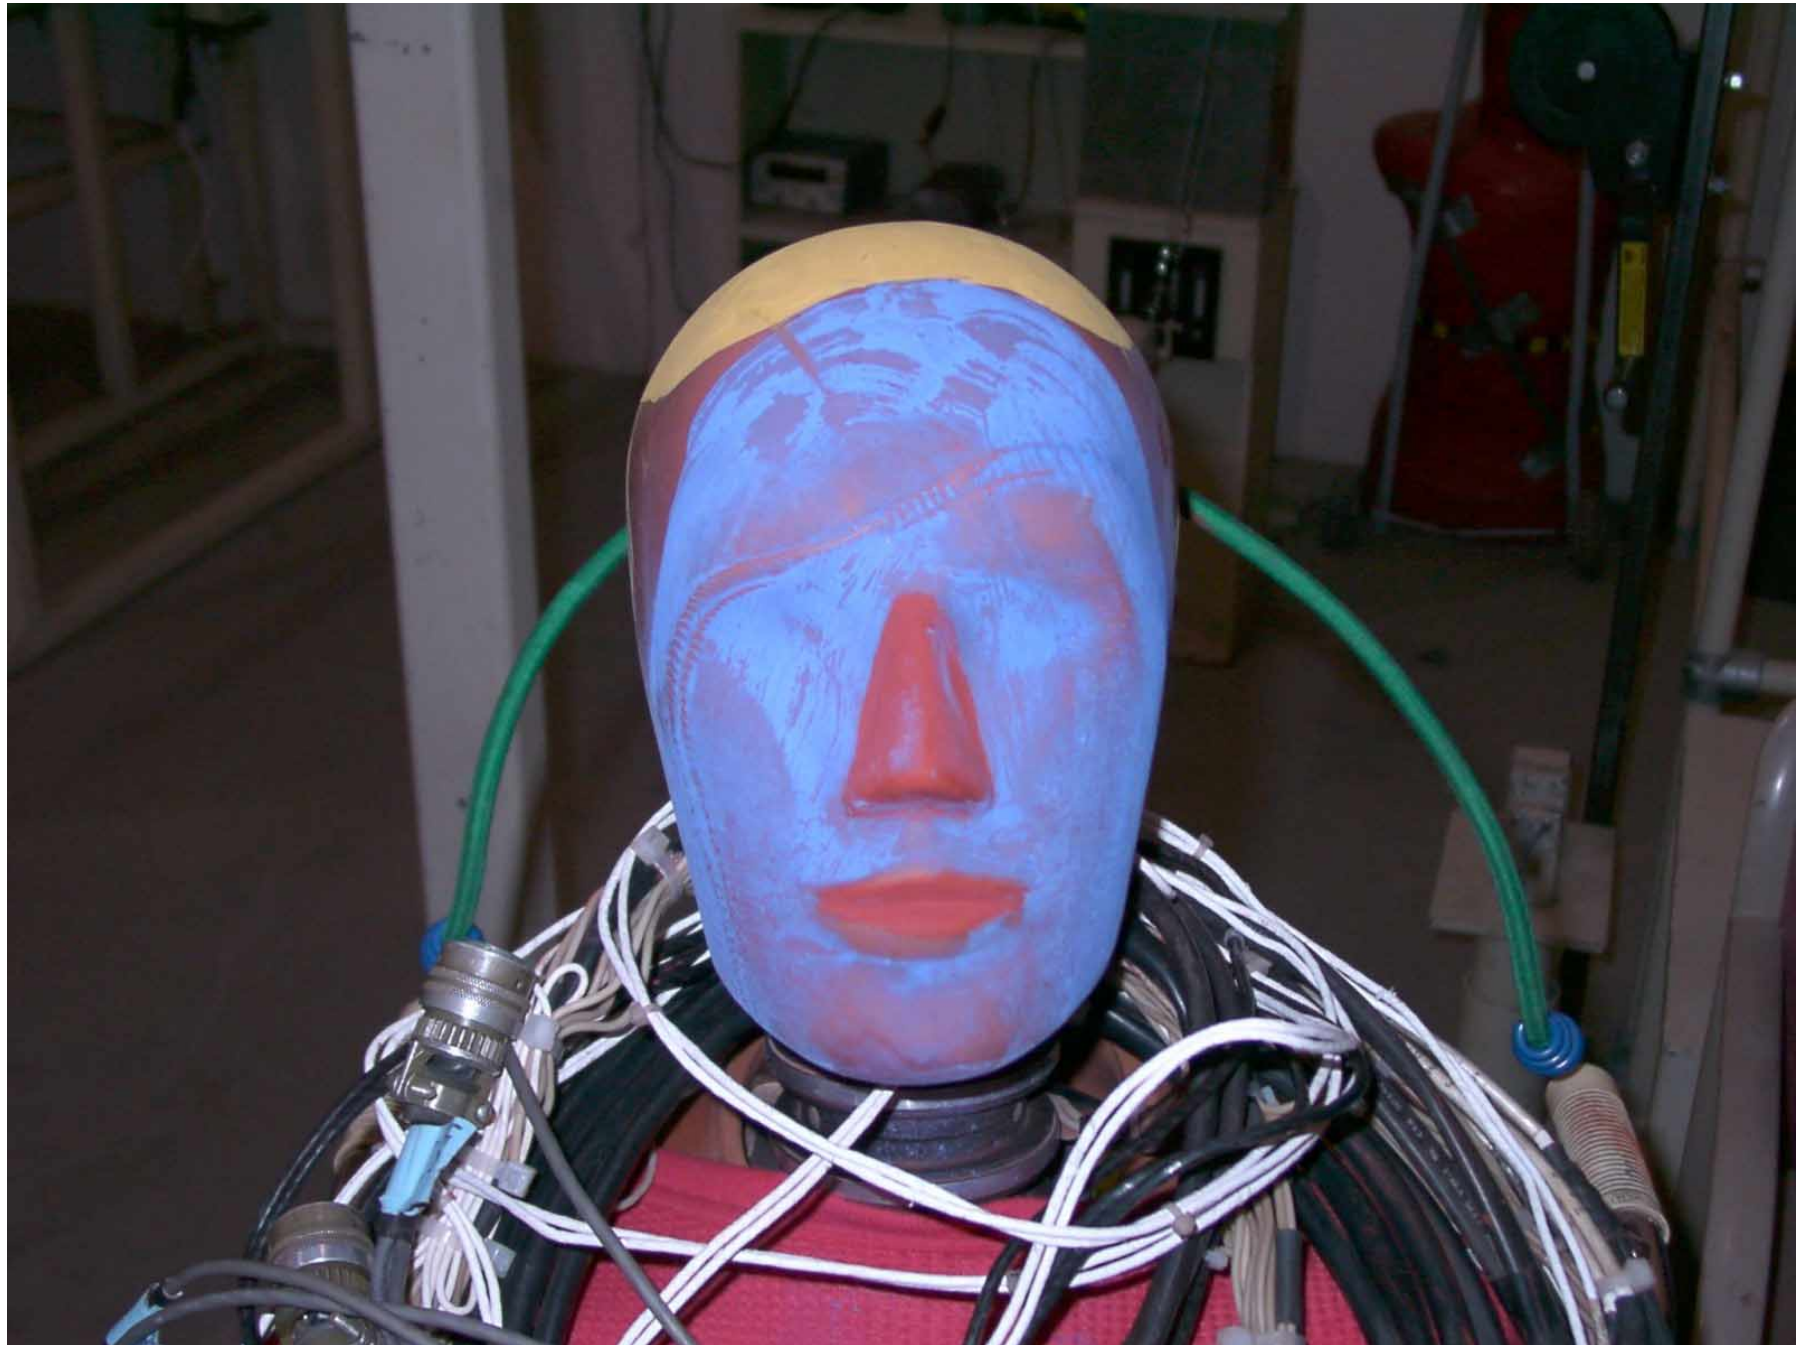


Figure A-39: Driver Dummy Head, Post-Test



Figure A-40: Driver Dummy Contact, Post-Test

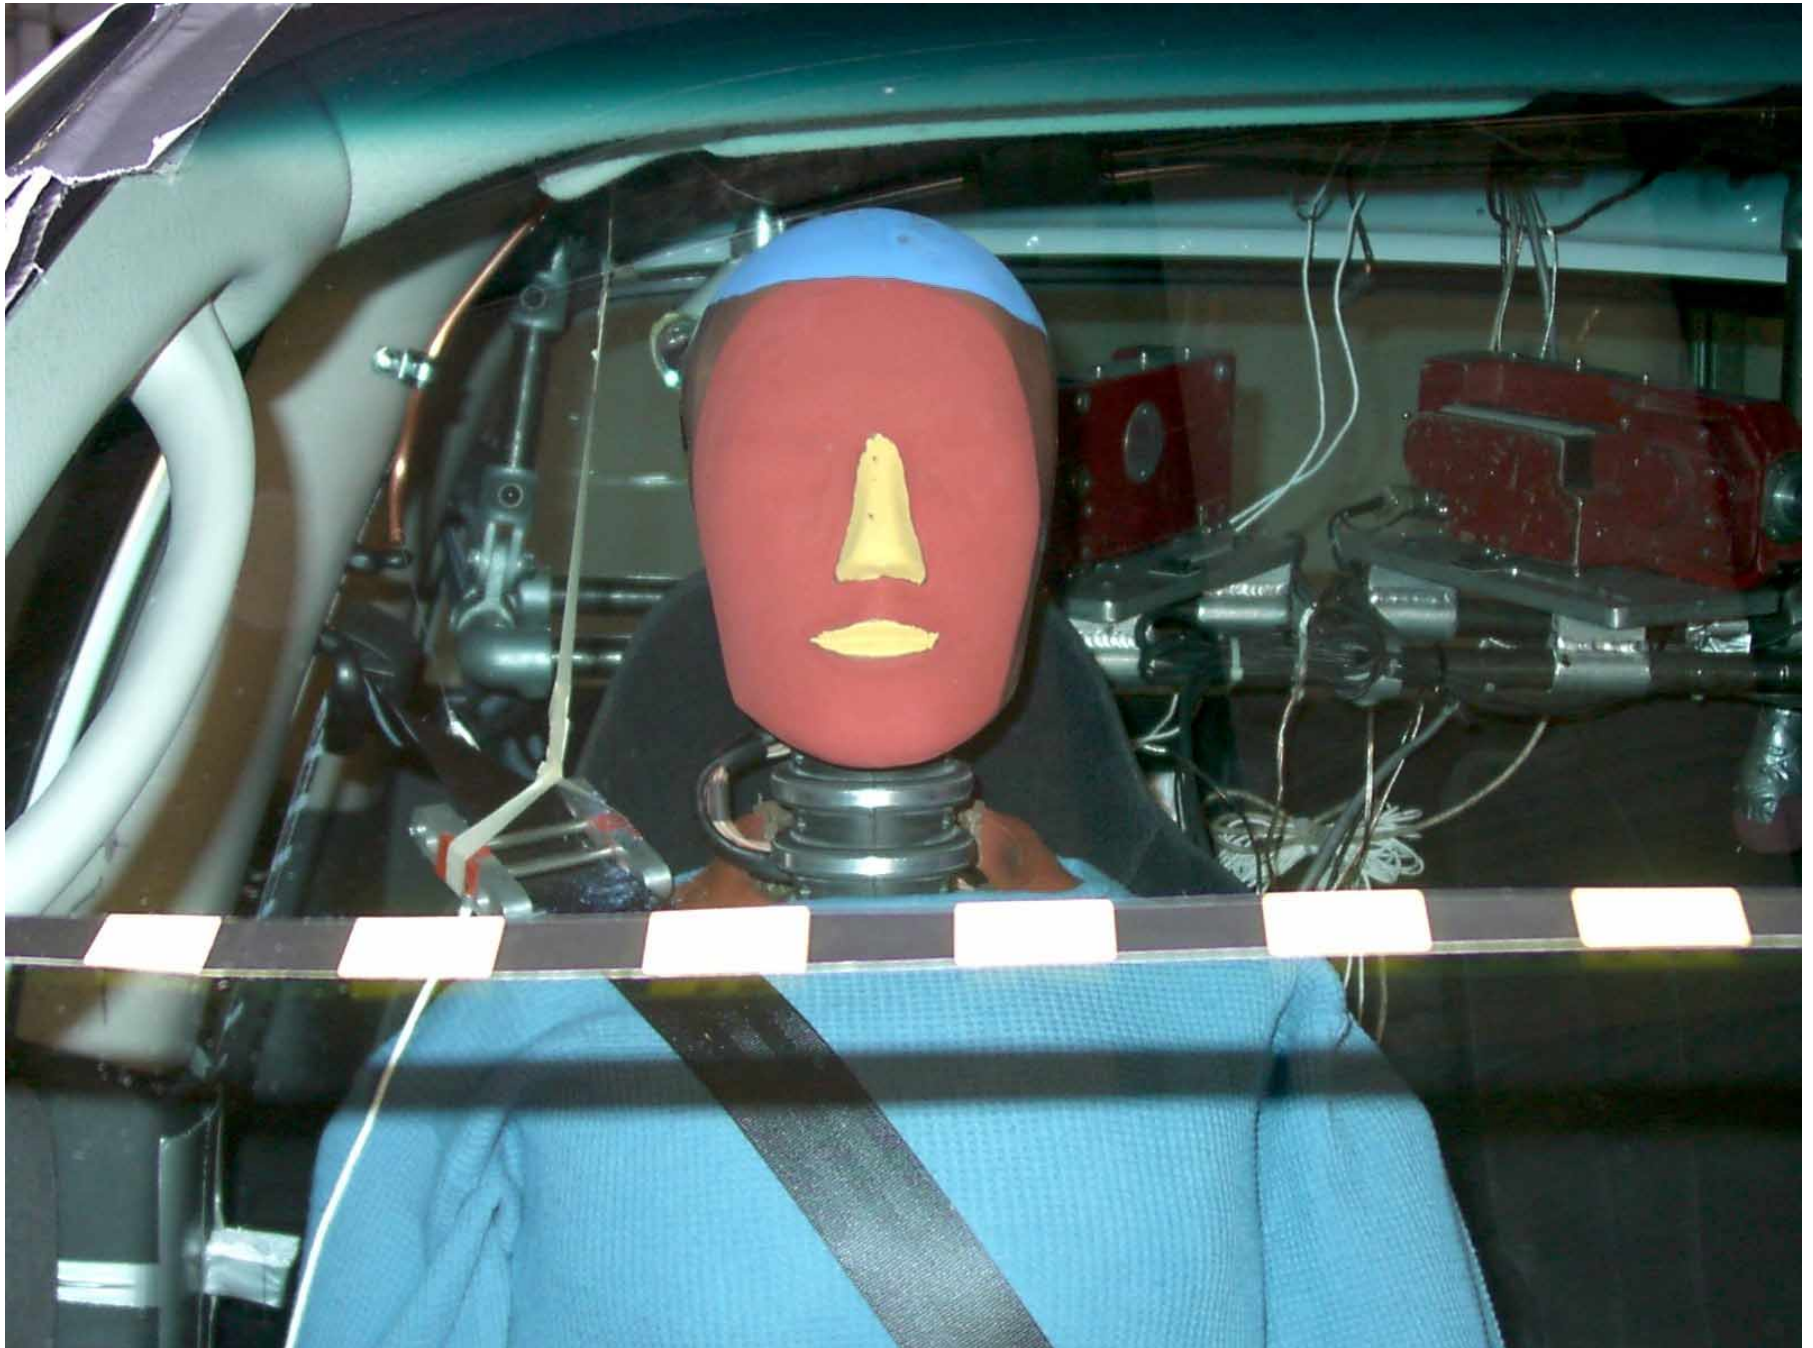


Figure A-41: Passenger Dummy Front View, Pre-Test



Figure A-42: Passenger Dummy Front View, Post-Test



Figure A-43: Passenger Dummy Through Window, Pre-Test



Figure A-44: Passenger Dummy Through Window, Post-Test



Figure A-45: Passenger Dummy Door Open, Pre-Test



Figure A-46: Passenger Dummy Door Open, Post-Test



Figure A-47: Passenger Dummy 90° To Vehicle, Pre-Test



Figure A-48: Passenger Dummy 90° To Vehicle, Post-Test



Figure A-49: Passenger Dummy Feet, Pre-Test



Figure A-50: Passenger Dummy Feet and Knee Contact, Post-Test

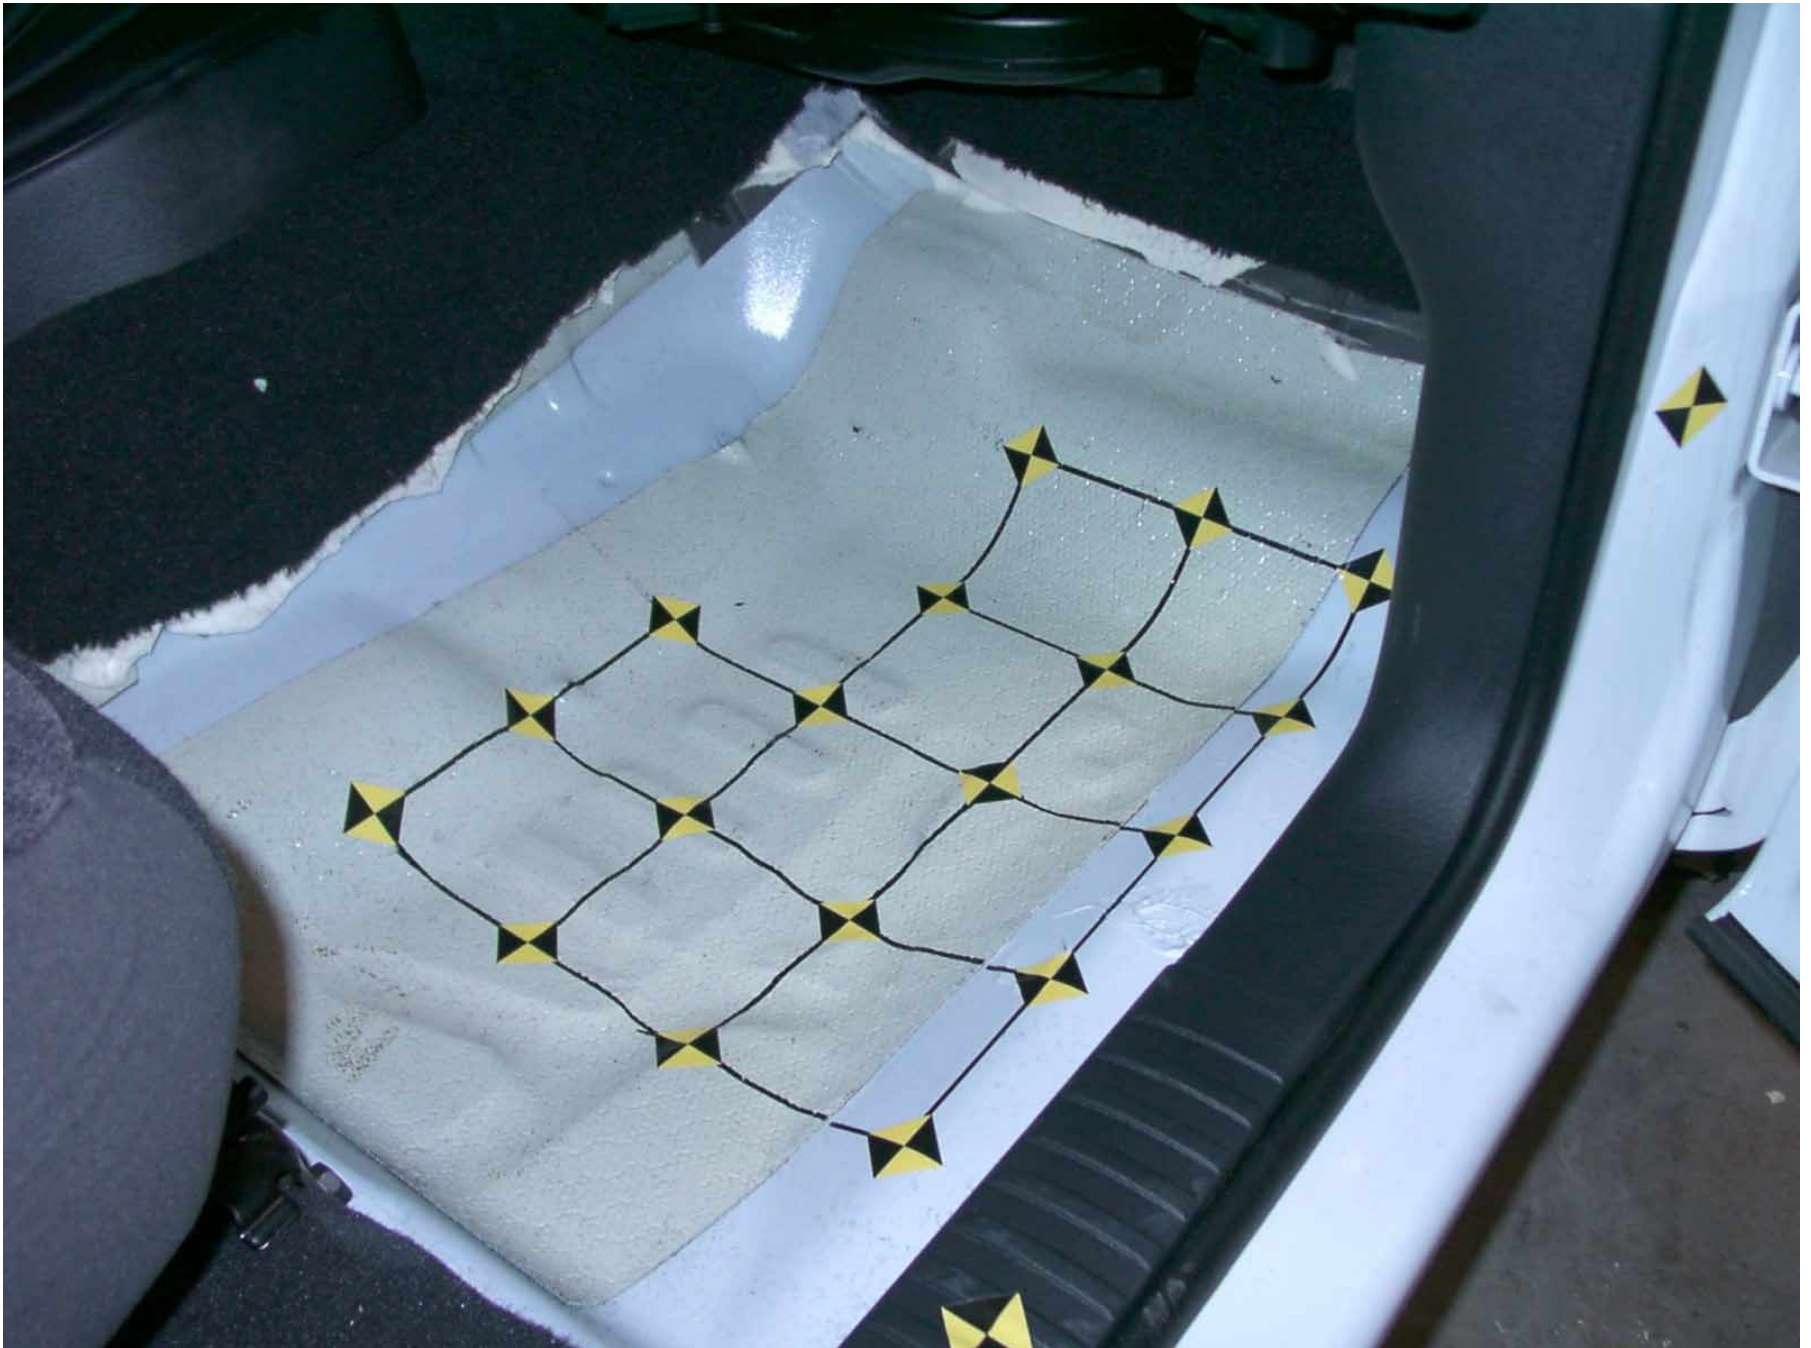


Figure A-51: Passenger Side Floor Pan, Pre-Test



Figure A-52: Passenger Side Floor Pan, Post-Test



Figure A-53: Passenger Side Knee Bolster, Pre-Test



Figure A-54: Passenger Side Knee Bolster, Post-Test



Figure A-55: Passenger Head, Post-Test



Figure A-56: Passenger Dummy Contact, Post-Test



Figure A-57: Vehicle on Rollover Device



Figure A-58: Vehicle During Impact

APPENDIX B

DUMMY AND VEHICLE RESPONSE DATA TRACES

LIST OF DATA PLOTS

Data Plot		Page
B-1	Driver Head Primary X	B-1
B-2	Driver Head Primary X Velocity	B-2
B-3	Driver Head Primary X Displacement	B-3
B-4	Driver Head Primary Y	B-4
B-5	Driver Head Primary Z	B-5
B-6	Driver Head Resultant Primary	B-6
B-7	Driver Head Redundant X	B-7
B-8	Driver Head Redundant X Velocity	B-8
B-9	Driver Head Redundant X Displacement	B-9
B-10	Driver Head Redundant Y	B-10
B-11	Driver Head Redundant Z	B-11
B-12	Driver Head Resultant Redundant	B-12
B-13	Driver Neck Force X	B-13
B-14	Driver Neck Force Y	B-14
B-15	Driver Neck Force Z	B-15
B-16	Driver Neck Force Resultant	B-16
B-17	Driver Neck Moment X	B-17
B-18	Driver Neck Moment Y	B-18
B-19	Driver Neck Moment Z	B-19
B-20	Driver Neck Moment Resultant	B-20
B-21	Driver Chest Primary X	B-21
B-22	Driver Chest Primary X Velocity	B-22
B-23	Driver Chest Primary X Displacement	B-23
B-24	Driver Chest Primary Y	B-24
B-25	Driver Chest Primary Z	B-25
B-26	Driver Chest Primary Resultant	B-26
B-27	Driver Chest Redundant X	B-27
B-28	Driver Chest Redundant X Velocity	B-28
B-29	Driver Chest Redundant X Displacement	B-29
B-30	Driver Chest Redundant Y	B-30
B-31	Driver Chest Redundant Z	B-31
B-32	Driver Chest Redundant Resultant	B-32
B-33	Driver Chest Displacement X	B-33

LIST OF DATA PLOTS...(Continued)

Data Plot	Page
B-34 Driver Pelvis X	B-34
B-35 Driver Pelvis X Velocity	B-35
B-36 Driver Pelvis X Displacement	B-36
B-37 Driver Pelvis Y	B-37
B-38 Driver Pelvis Z	B-38
B-39 Driver Pelvis Resultant	B-39
B-40 Driver Left Femur Force	B-40
B-41 Driver Right Femur Force	B-41
B-42 Driver Left Upper Tibia Moment X	B-42
B-43 Driver Left Upper Tibia Moment Y	B-43
B-44 Driver Right Upper Tibia Moment X	B-44
B-45 Driver Right Upper Tibia Moment Y	B-45
B-46 Driver Left Lower Tibia Moment X	B-46
B-47 Driver Left Lower Tibia Moment Y	B-47
B-48 Driver Left Lower Tibia Force Z	B-48
B-49 Driver Right Lower Tibia Moment X	B-49
B-50 Driver Right Lower Tibia Moment Y	B-50
B-51 Driver Right Lower Tibia Force Z	B-51
B-52 Driver Left Foot Aft X	B-52
B-53 Driver Left Foot Aft Z	B-53
B-54 Driver Left Foot Fore Z	B-54
B-55 Driver Right Foot Aft X	B-55
B-56 Driver Right Foot Aft Z	B-56
B-57 Driver Right Foot Fore Z	B-57
B-58 Driver Lap Belt Force	B-58
B-59 Driver Shoulder Belt Force	B-59
B-60 Driver Shoulder Belt Pullout	B-60
B-61 Driver Shoulder Belt Elongation	B-61

LIST OF DATA PLOTS...(Continued)

Data Plot	Page
B-62 Passenger Head Primary X	B-62
B-63 Passenger Head Primary X Velocity	B-63
B-64 Passenger Head Primary X Displacement	B-64
B-65 Passenger Head Primary Y	B-65
B-66 Passenger Head Primary Z	B-66
B-67 Passenger Head Resultant Primary	B-67
B-68 Passenger Head Redundant X	B-68
B-69 Passenger Head Redundant X Velocity	B-69
B-70 Passenger Head Redundant X Displacement	B-70
B-71 Passenger Head Redundant Y	B-71
B-72 Passenger Head Redundant Z	B-72
B-73 Passenger Head Resultant Redundant	B-73
B-74 Passenger Neck Force X	B-74
B-75 Passenger Neck Force Y	B-75
B-76 Passenger Neck Force Z	B-76
B-77 Passenger Neck Force Resultant	B-77
B-78 Passenger Neck Moment X	B-78
B-79 Passenger Neck Moment Y	B-79
B-80 Passenger Neck Moment Z	B-80
B-81 Passenger Neck Moment Resultant	B-81
B-82 Passenger Chest Primary X	B-82
B-83 Passenger Chest Primary X Velocity	B-83
B-84 Passenger Chest Primary X Displacement	B-84
B-85 Passenger Chest Primary Y	B-85
B-86 Passenger Chest Primary Z	B-86
B-87 Passenger Chest Primary Resultant	B-87
B-88 Passenger Chest Redundant X	B-88
B-89 Passenger Chest Redundant X Velocity	B-89
B-90 Passenger Chest Redundant X Displacement	B-90
B-91 Passenger Chest Redundant Y	B-91
B-92 Passenger Chest Redundant Z	B-92
B-93 Passenger Chest Redundant Resultant	B-93
B-94 Passenger Chest Displacement X	B-94


LIST OF DATA PLOTS...(Continued)

Data Plot	Page
B-95 Passenger Pelvis X	B-95
B-96 Passenger Pelvis X Velocity	B-96
B-97 Passenger Pelvis X Displacement	B-97
B-98 Passenger Pelvis Y	B-98
B-99 Passenger Pelvis Z	B-99
B-100 Passenger Pelvis Resultant	B-100
B-101 Passenger Left Femur Force	B-101
B-102 Passenger Right Femur Force	B-102
B-103 Passenger Left Upper Tibia Moment X	B-103
B-104 Passenger Left Upper Tibia Moment Y	B-104
B-105 Passenger Right Upper Tibia Moment X	B-105
B-106 Passenger Right Upper Tibia Moment Y	B-106
B-107 Passenger Left Lower Tibia Moment X	B-107
B-108 Passenger Left Lower Tibia Moment Y	B-108
B-109 Passenger Left Lower Tibia Force Z	B-109
B-110 Passenger Right Lower Tibia Moment X	B-110
B-111 Passenger Right Lower Tibia Moment Y	B-111
B-112 Passenger Right Lower Tibia Force Z	B-112
B-113 Passenger Left Foot Aft X	B-113
B-114 Passenger Left Foot Aft Z	B-114
B-115 Passenger Left Foot Fore Z	B-115
B-116 Passenger Right Foot Aft X	B-116
B-117 Passenger Right Foot Aft Z	B-117
B-118 Passenger Right Foot Fore Z	B-118
B-119 Passenger Lap Belt Force	B-119
B-120 Passenger Shoulder Belt Force	B-120
B-121 Passenger Shoulder Belt Pullout	B-121
B-122 Passenger Shoulder Belt Elongation	B-122

LIST OF DATA PLOTS...(Continued)

Data Plot		Page
B-123	Vehicle Left Rear Primary	B-123
B-124	Vehicle Left Rear Primary Velocity	B-124
B-125	Vehicle Left Rear Primary Displacement	B-125
B-126	Vehicle Right Rear Primary	B-126
B-127	Vehicle Right Rear Primary Velocity	B-127
B-128	Vehicle Right Rear Primary Displacement	B-128
B-129	Vehicle Engine Top	B-129
B-130	Vehicle Engine Top Velocity	B-130
B-131	Vehicle Engine Top Displacement	B-131
B-132	Vehicle Engine Bottom	B-132
B-133	Vehicle Engine Bottom Velocity	B-133
B-134	Vehicle Engine Bottom Displacement	B-134
B-135	Vehicle Left Brake Caliper	B-135
B-136	Vehicle Left Brake Caliper Velocity	B-136
B-137	Vehicle Left Brake Caliper Displacement	B-137
B-138	Vehicle Right Brake Caliper	B-138
B-139	Vehicle Right Brake Caliper Velocity	B-139
B-140	Vehicle Right Brake Caliper Displacement	B-140
B-141	Vehicle Instrument Panel	B-141
B-142	Vehicle Instrument Panel Velocity	B-142
B-143	Vehicle Instrument Panel Displacement	B-143
B-144	Vehicle Left Rear Redundant	B-144
B-145	Vehicle Left Rear Redundant Velocity	B-145
B-146	Vehicle Left Rear Redundant Displacement	B-146

B-1

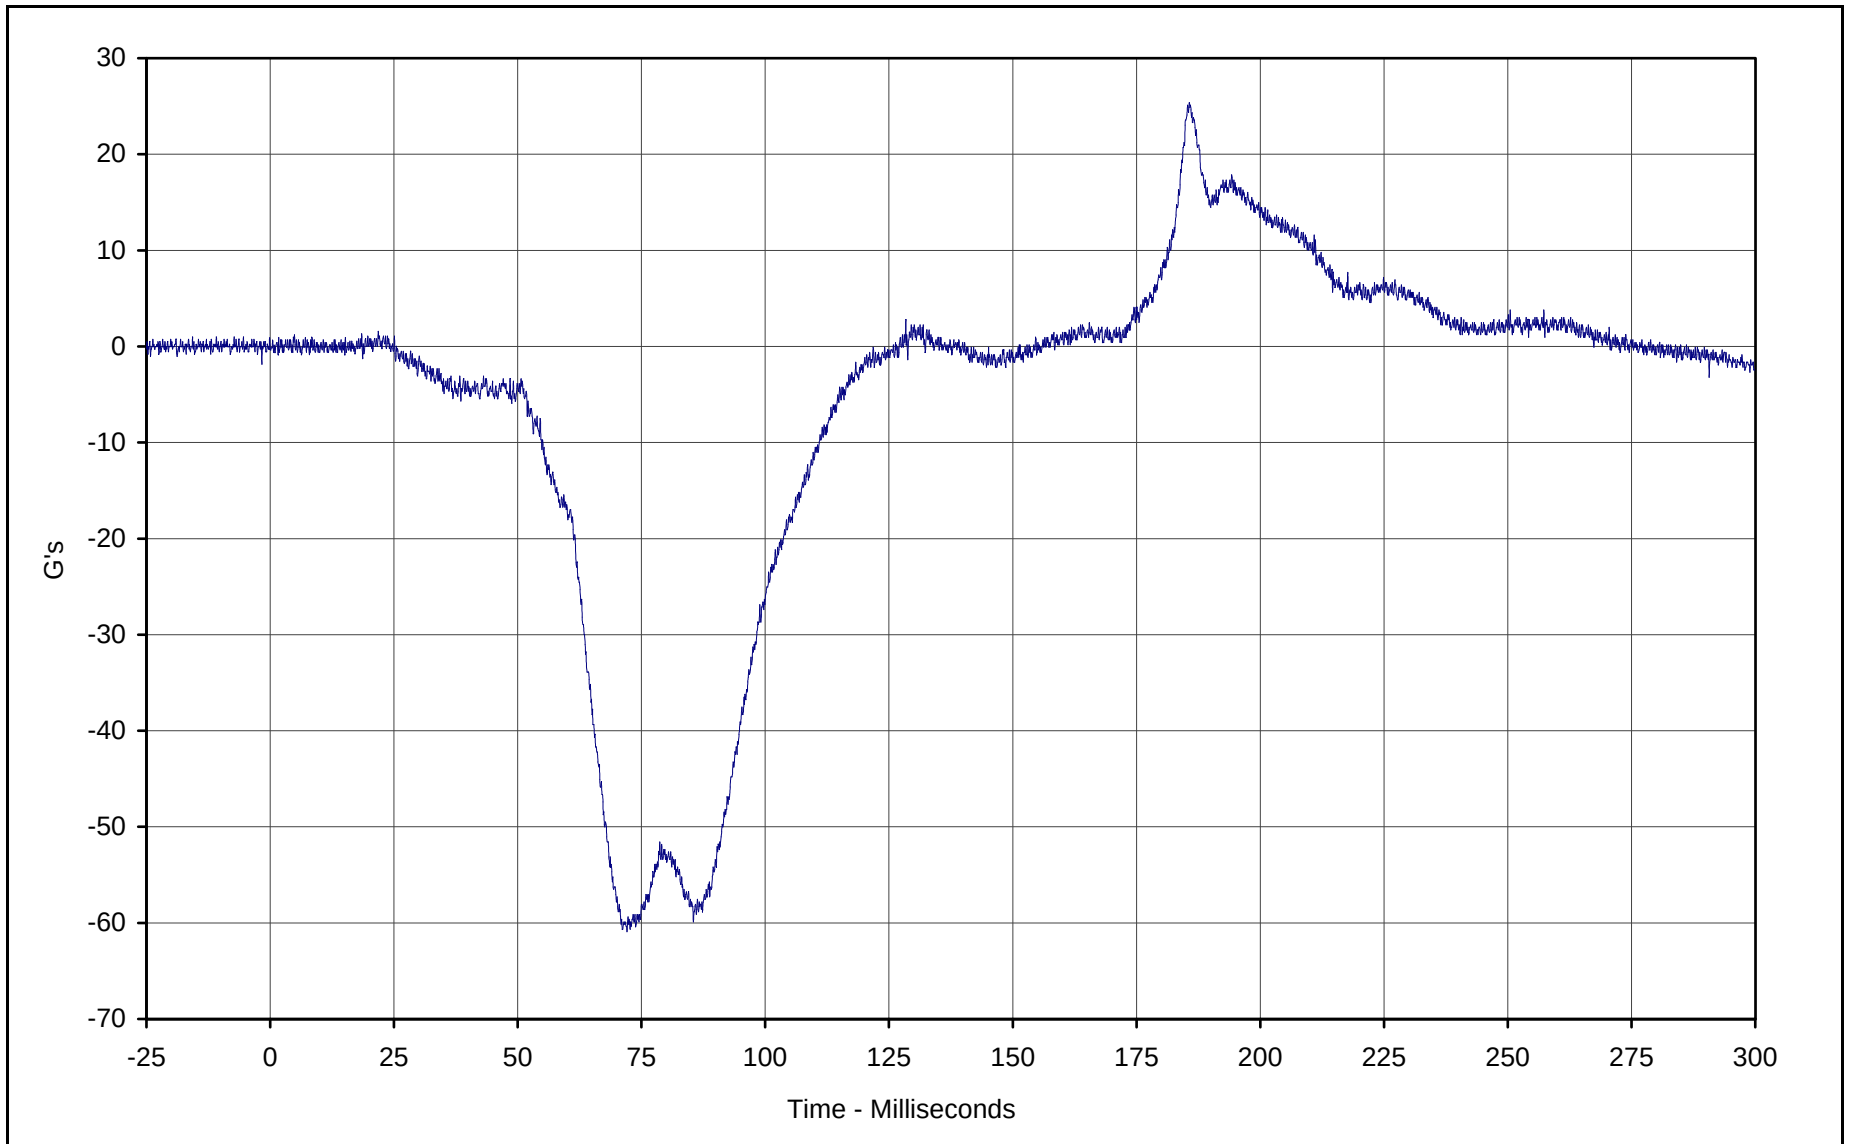


Curve Description: Driver Head Primary X
Maximum Value: 25.4 at 185.7 Milliseconds
Minimum Value: -60.9 at 72.1 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: FIL-001

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-2

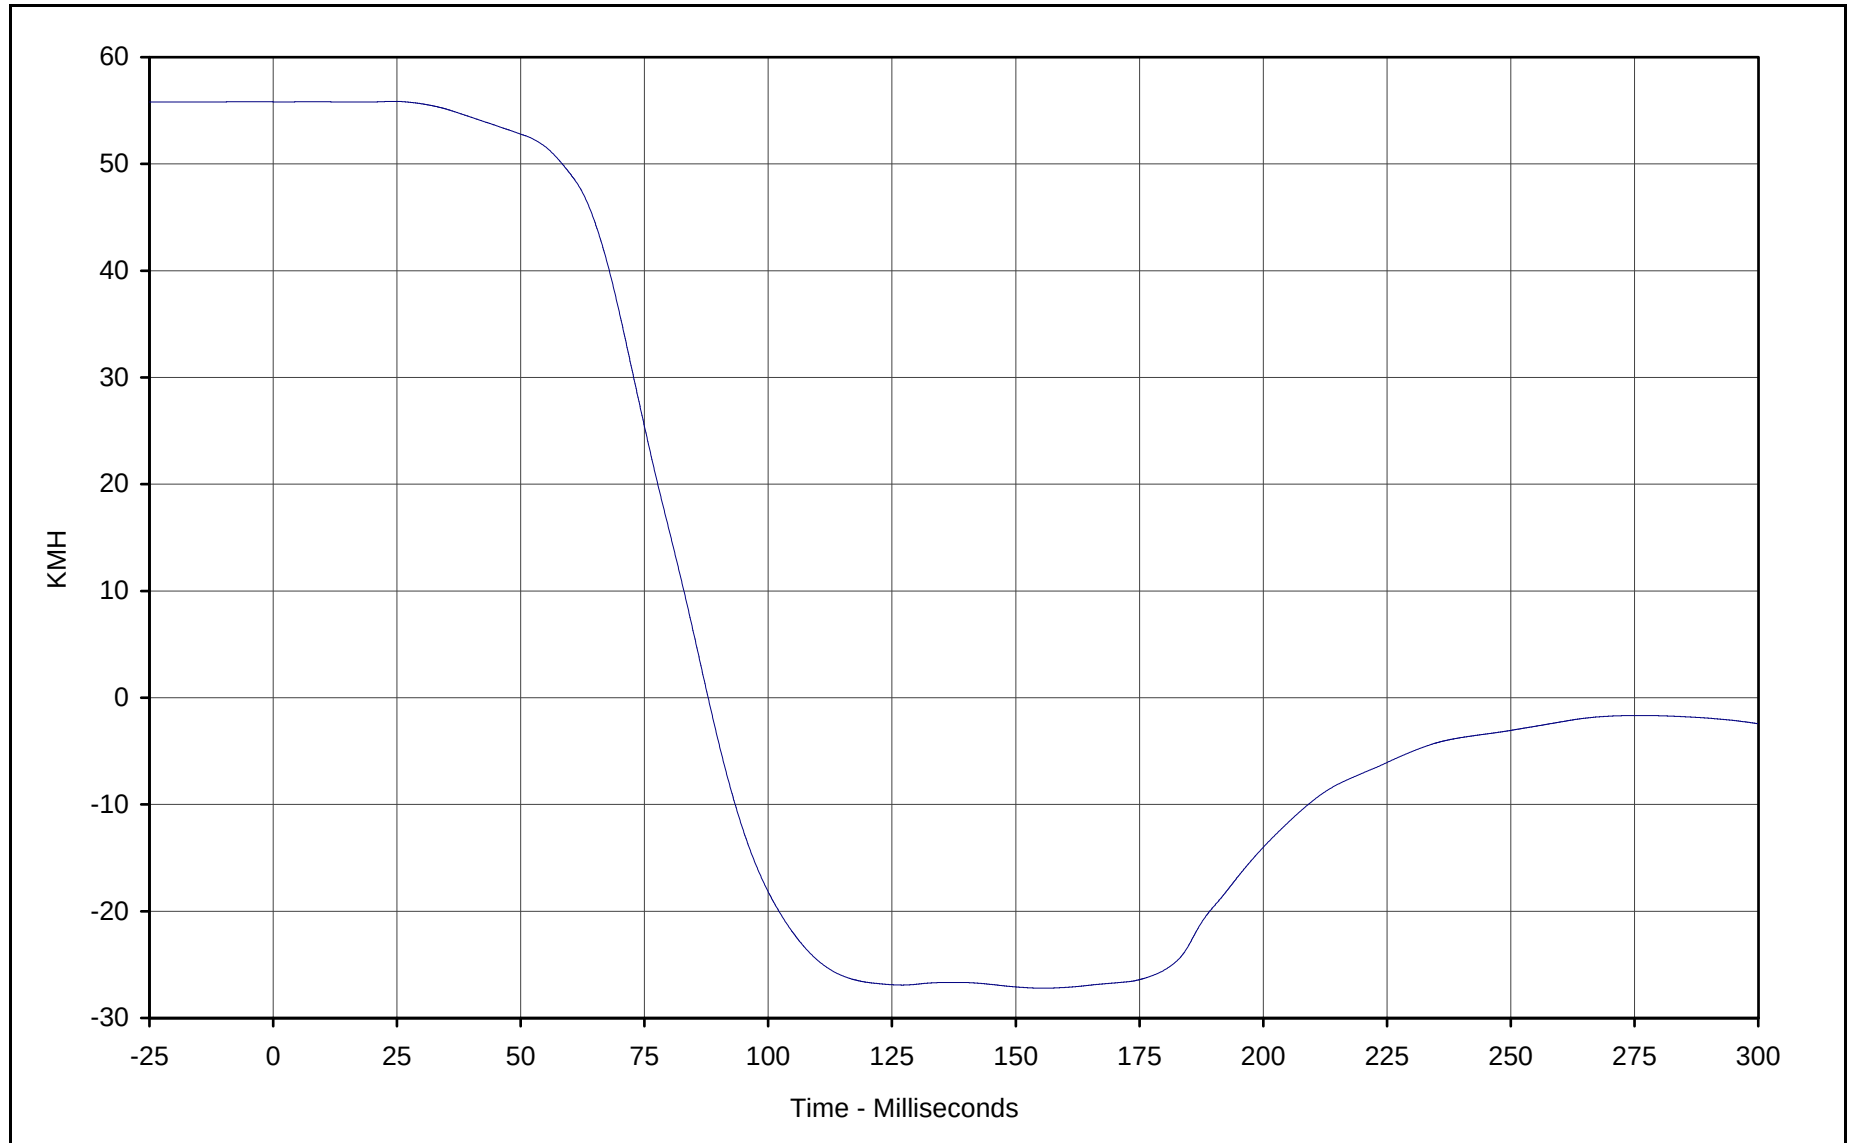


Curve Description: Driver Head Primary X Velocity
Maximum Value: 55.9 at 24.4 Milliseconds
Minimum Value: -27.2 at 155.9 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: IN1-001

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup




KAR21001-10

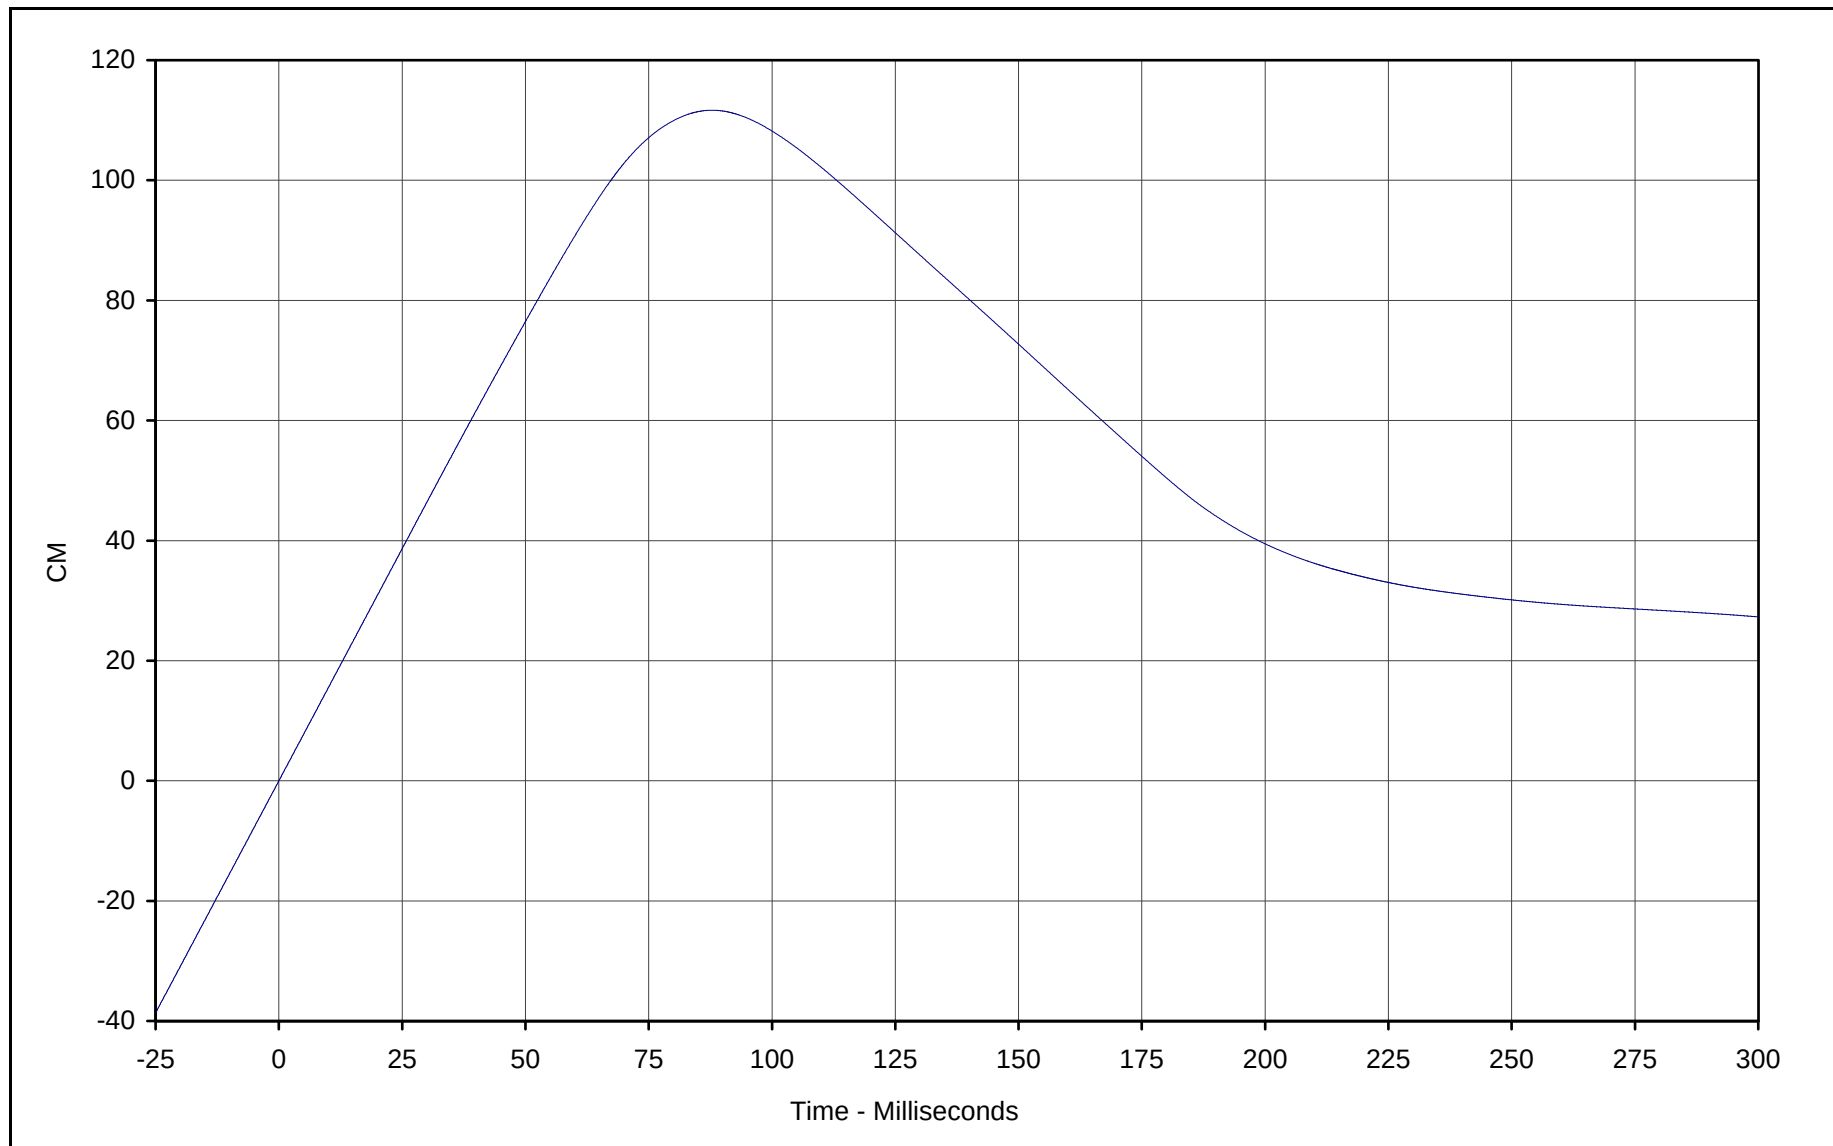

Curve Description: Driver Head Primary X Displ.
Maximum Value: 111.7 at 87.9 Milliseconds
Minimum Value: 0.0 at 0.0 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: IN2-001

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup




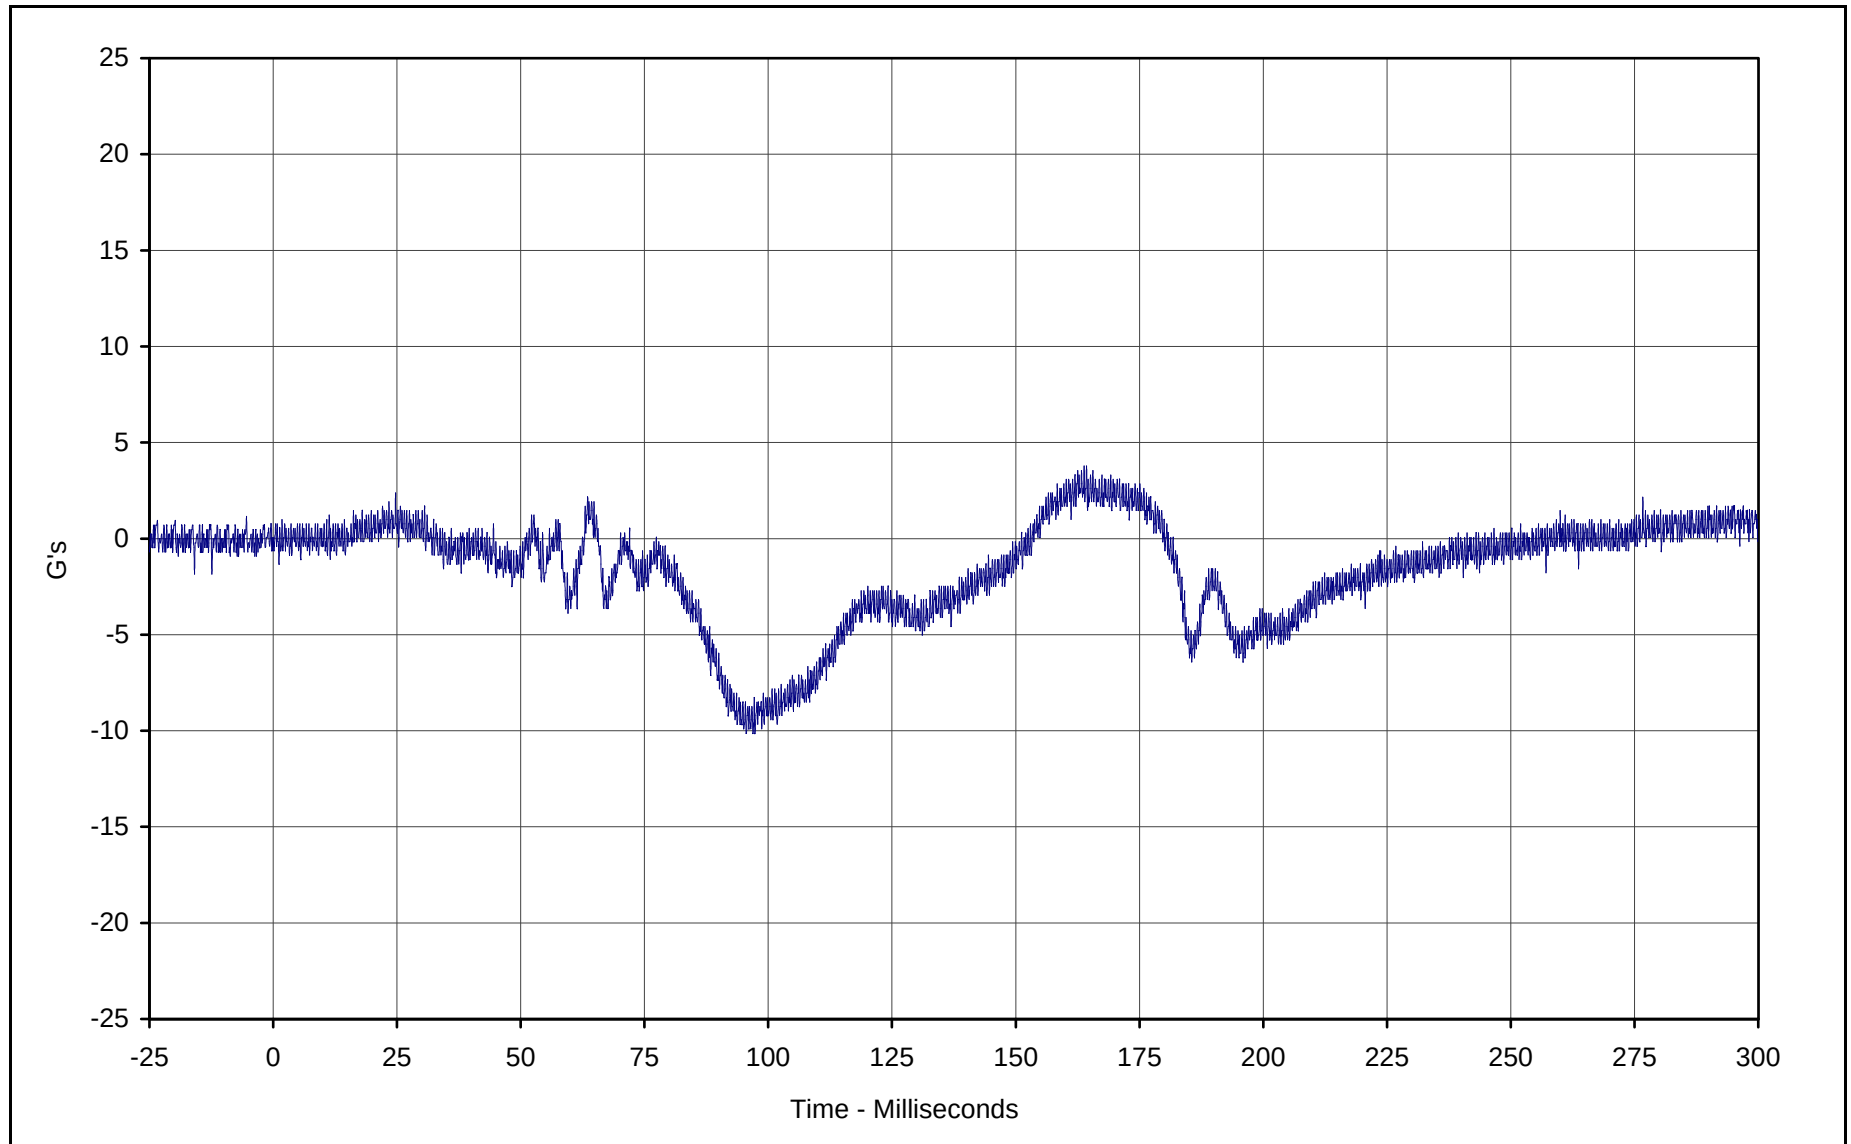

Curve Description: Driver Head Primary Y
Maximum Value: 3.8 at 163.8 Milliseconds
Minimum Value: -10.1 at 95.5 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: FIL-002

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup




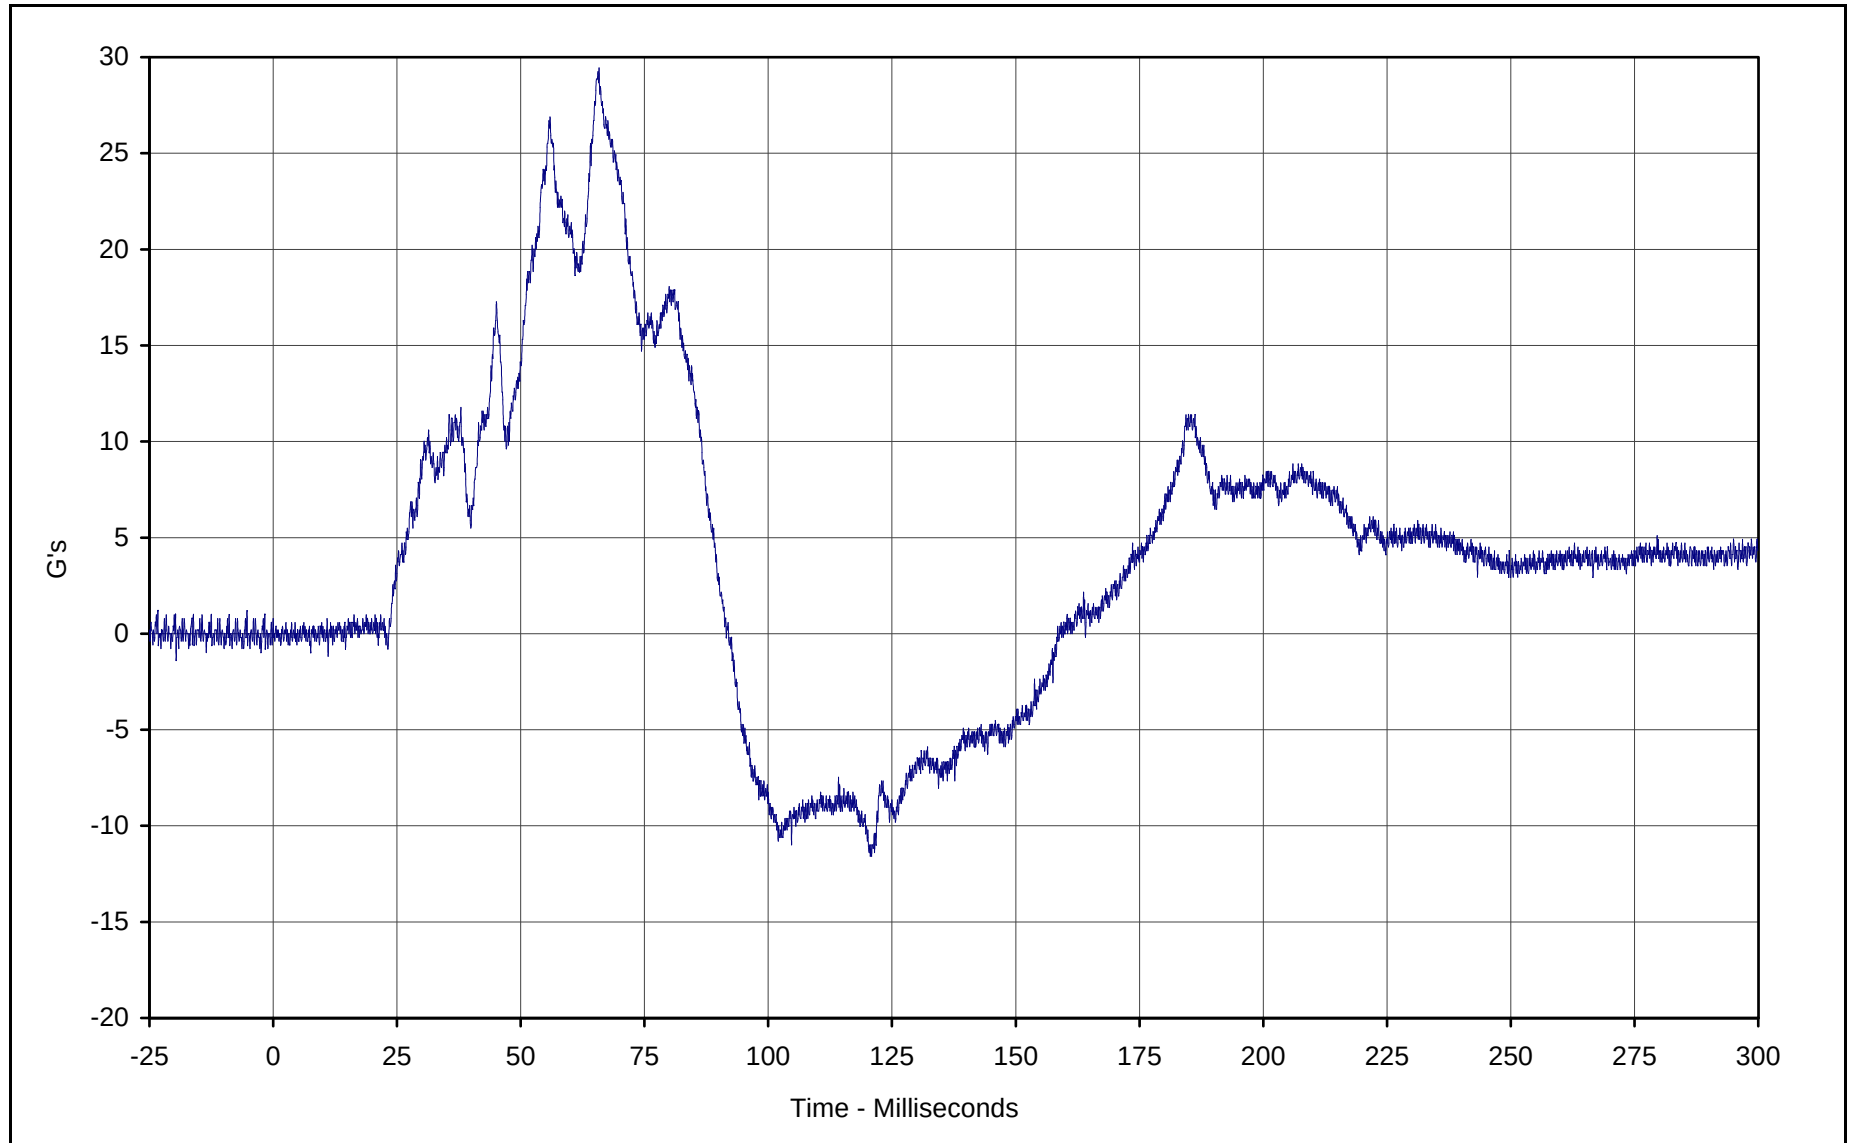

Curve Description: Driver Head Primary Z
Maximum Value: 29.5 at 65.8 Milliseconds
Minimum Value: -11.6 at 120.6 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: FIL-003

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup




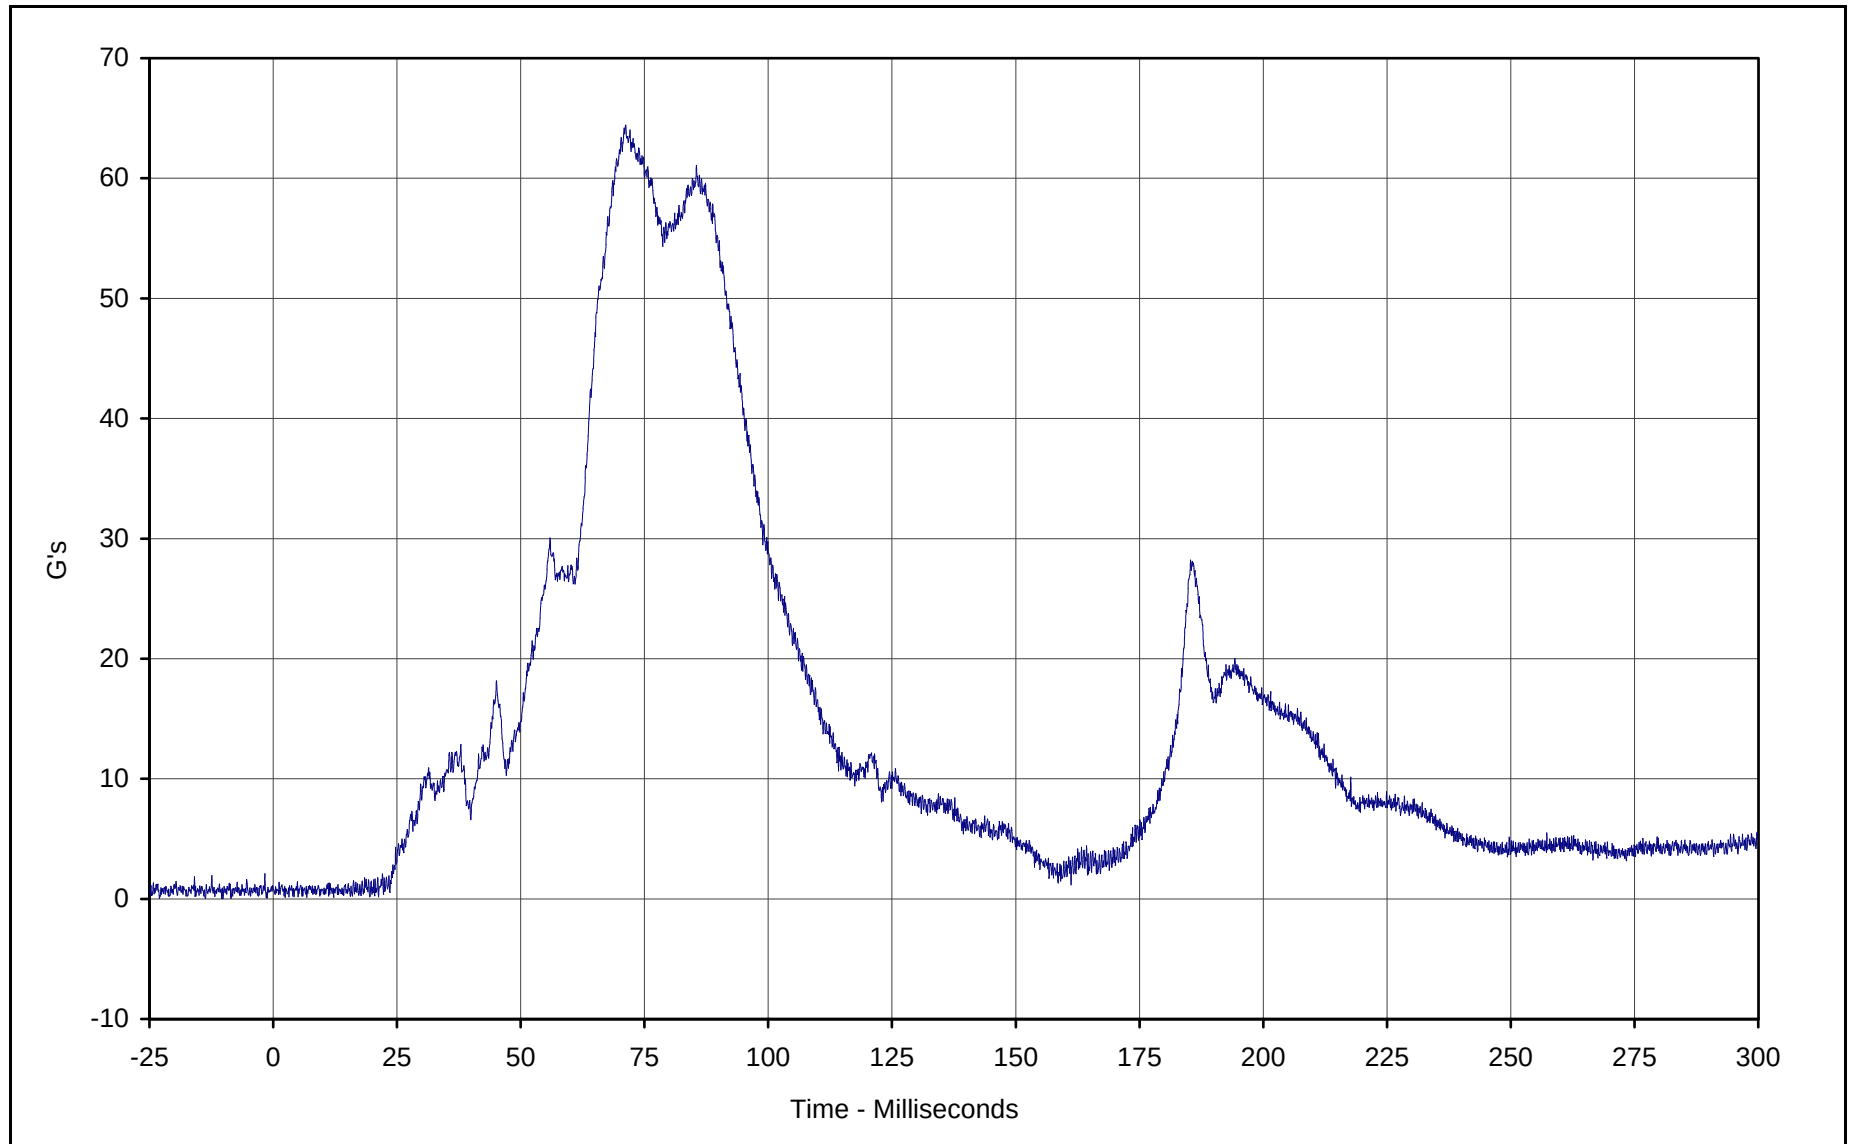

Curve Description: Driver Head Resultant Primary
Maximum Value: 64.4 at 71.2 Milliseconds
Minimum Value: 0.1 at 2.4 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: RES-001

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



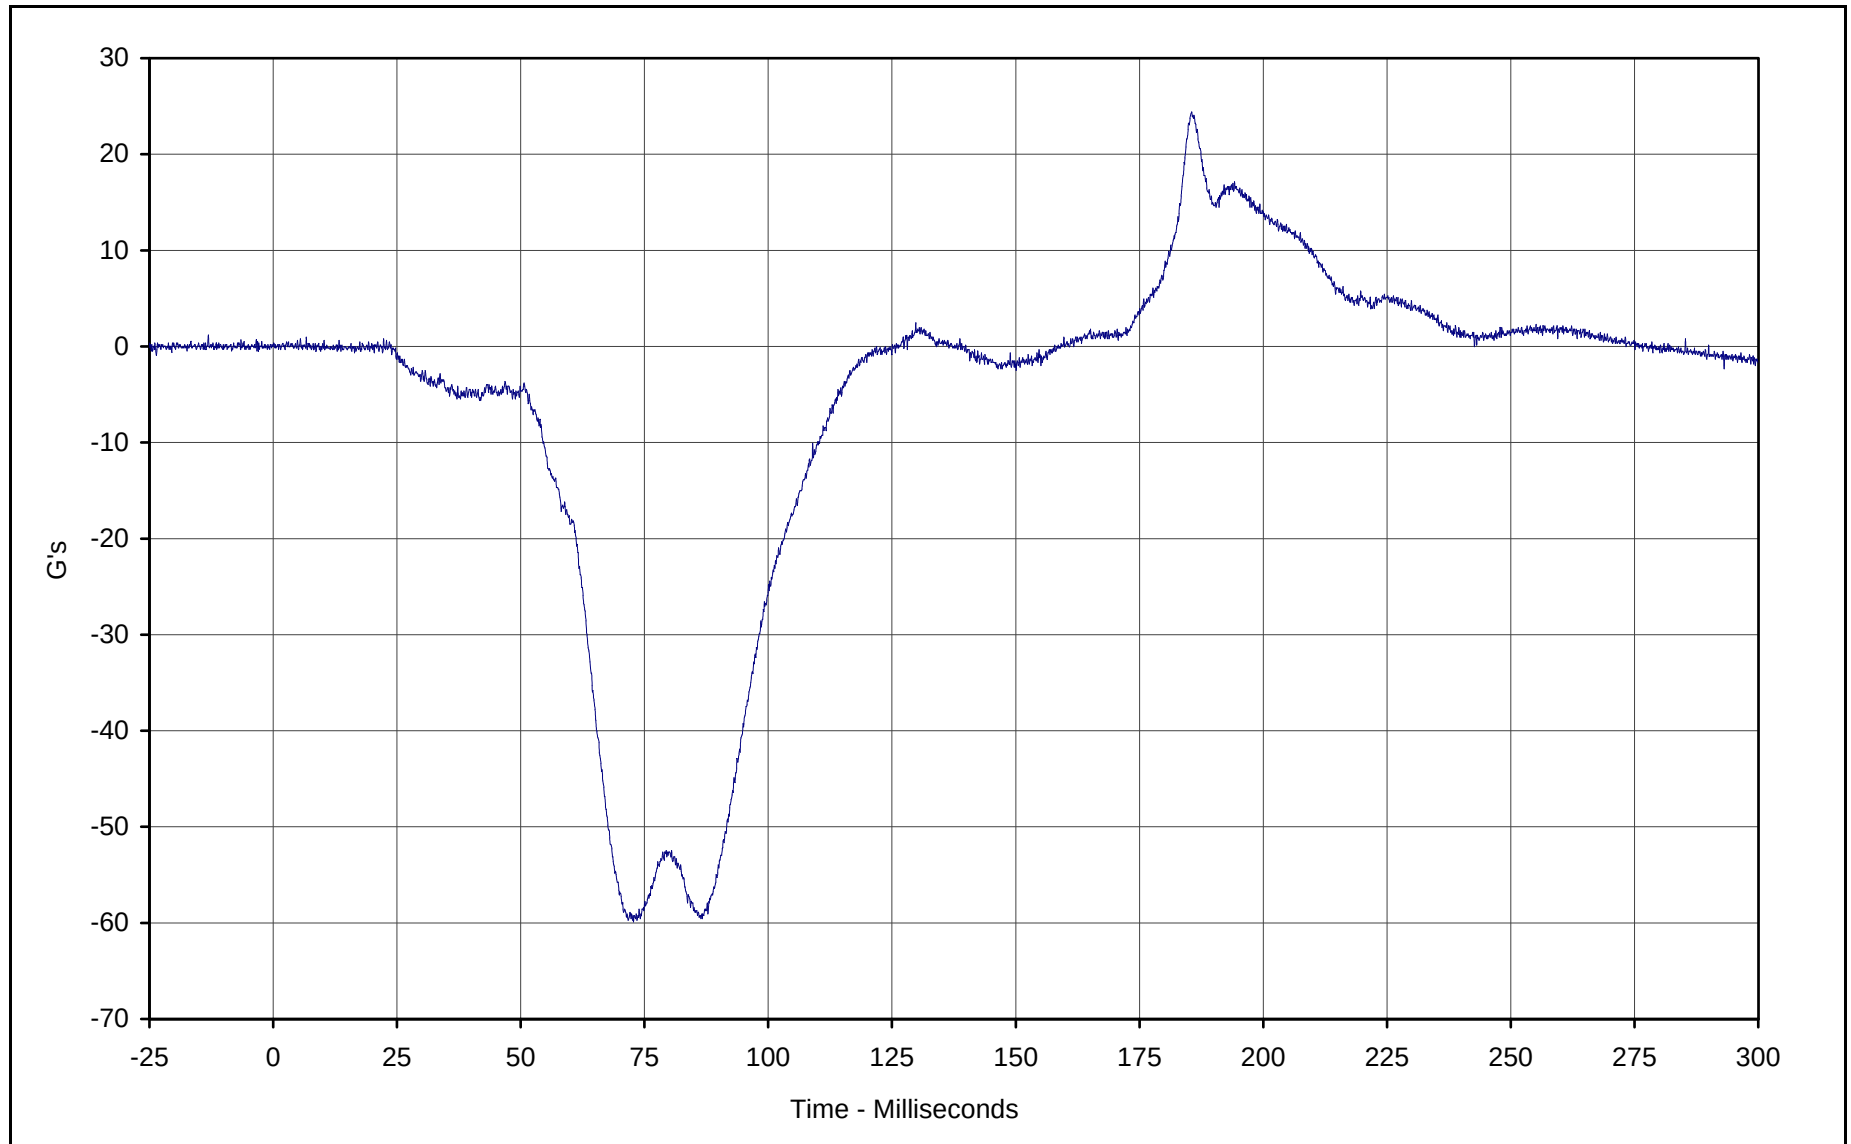


Curve Description: Driver Head Redundant X
Maximum Value: 24.4 at 185.5 Milliseconds
Minimum Value: -59.9 at 72.8 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: FIL-004

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-8

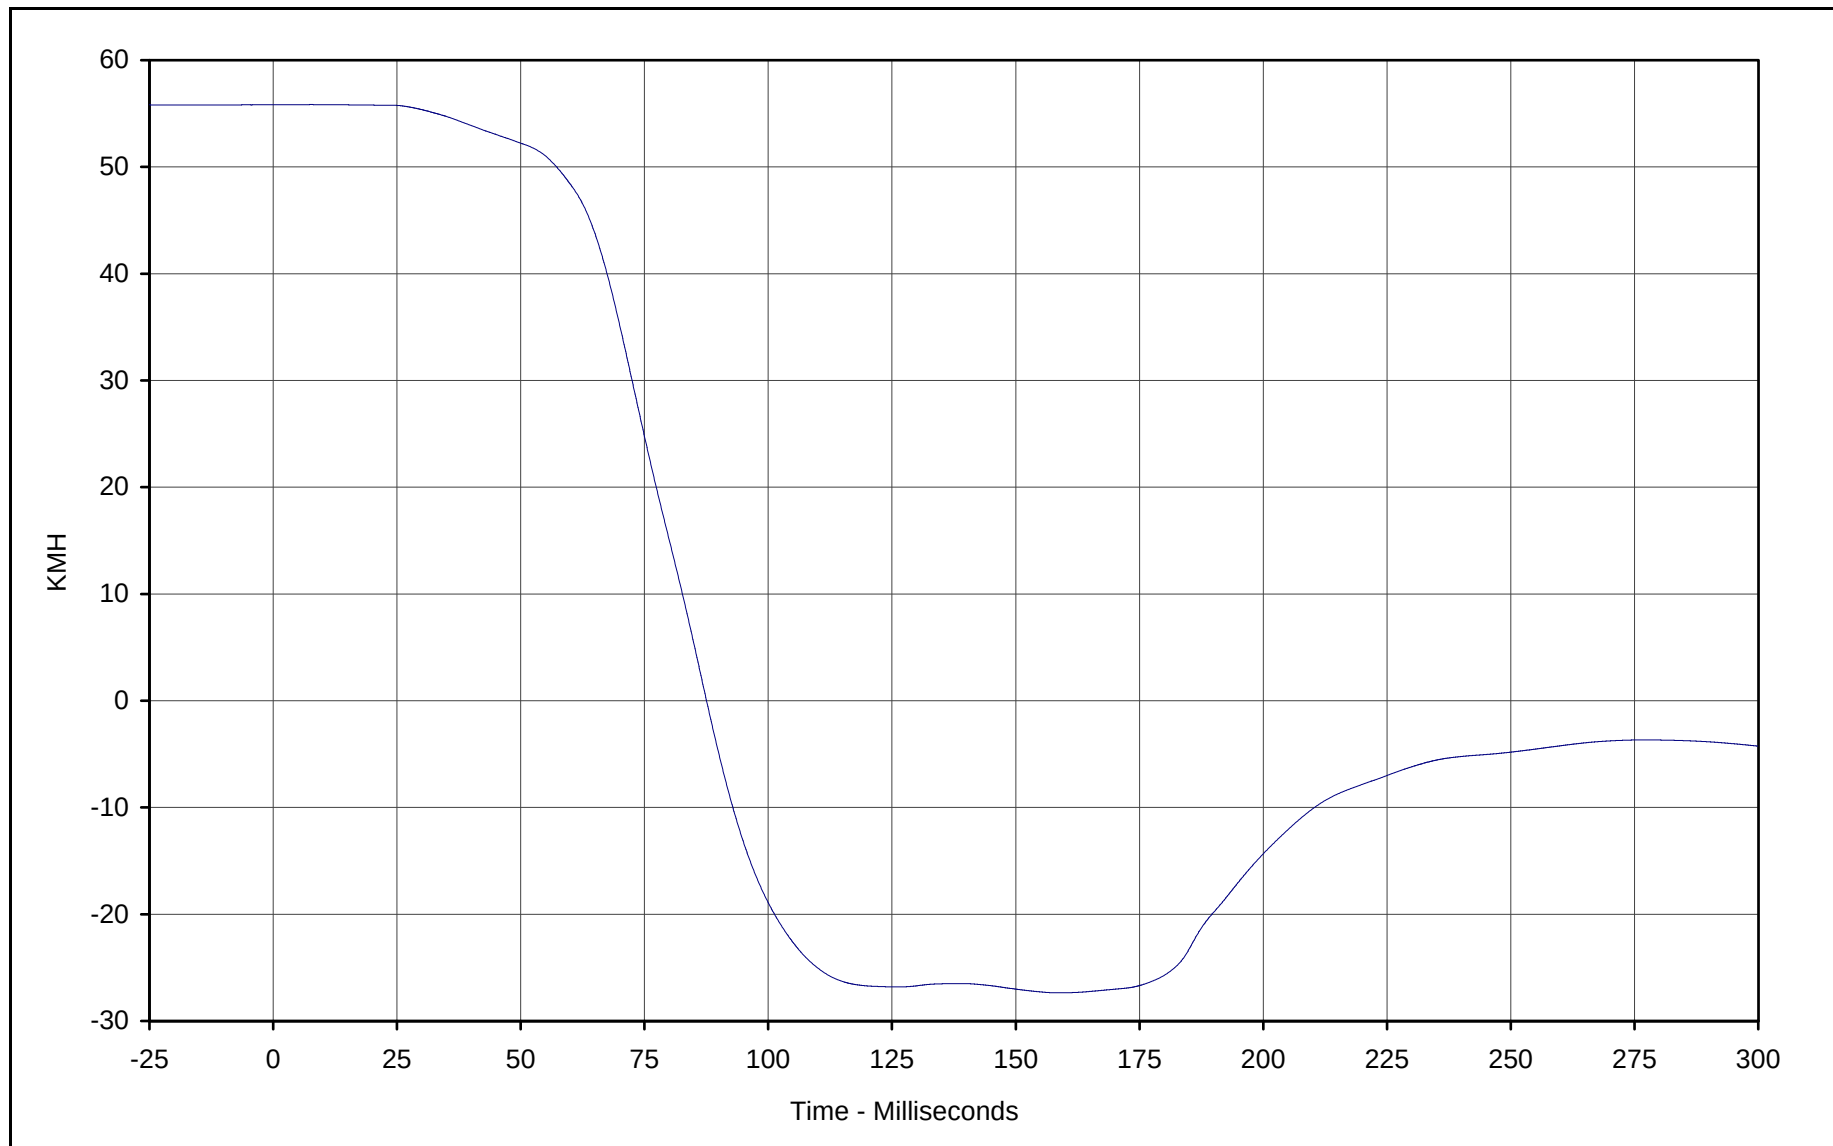


Curve Description: Driver Head Redundant X Velocity
Maximum Value: 55.8 at 7.7 Milliseconds
Minimum Value: -27.4 at 158.9 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: IN1-004

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

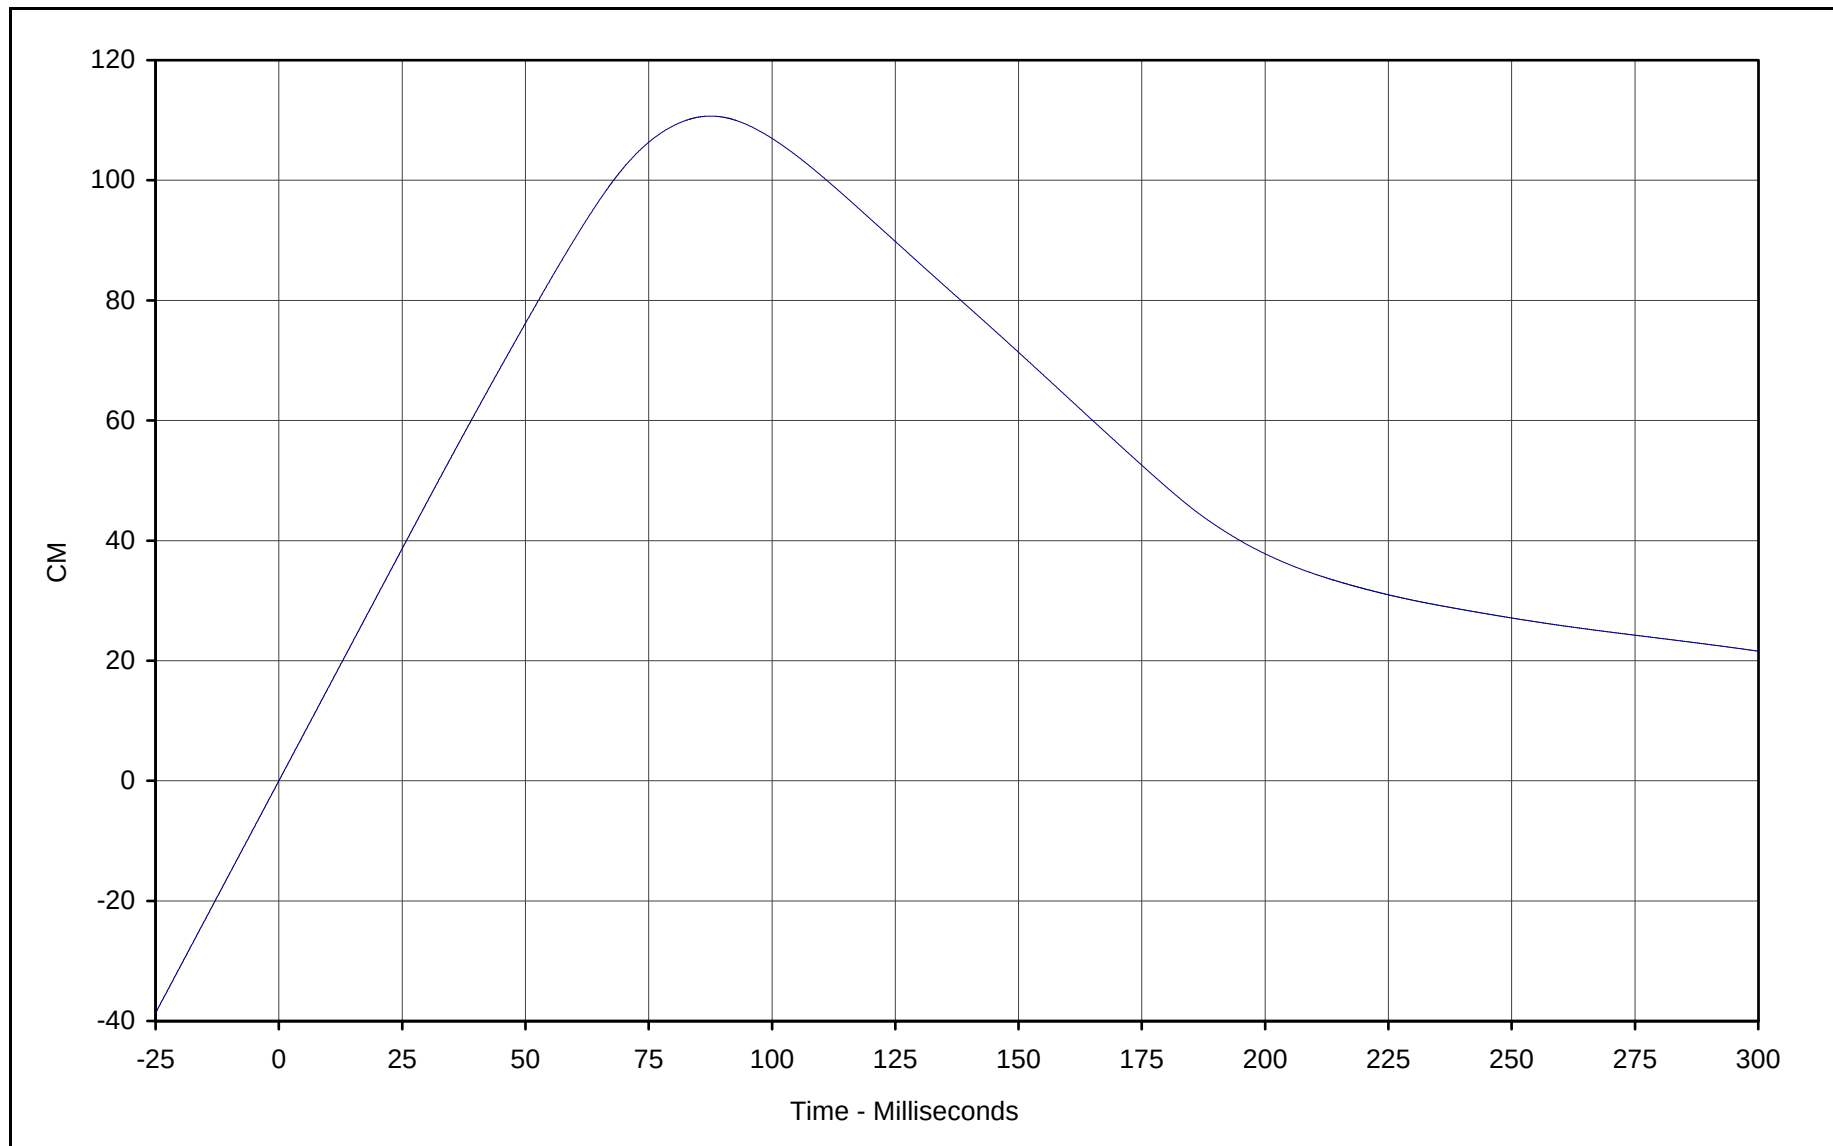


Curve Description: Driver Head Redundant X Displ.
Maximum Value: 110.7 at 87.5 Milliseconds
Minimum Value: 0.0 at 0.0 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: IN2-004

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-10

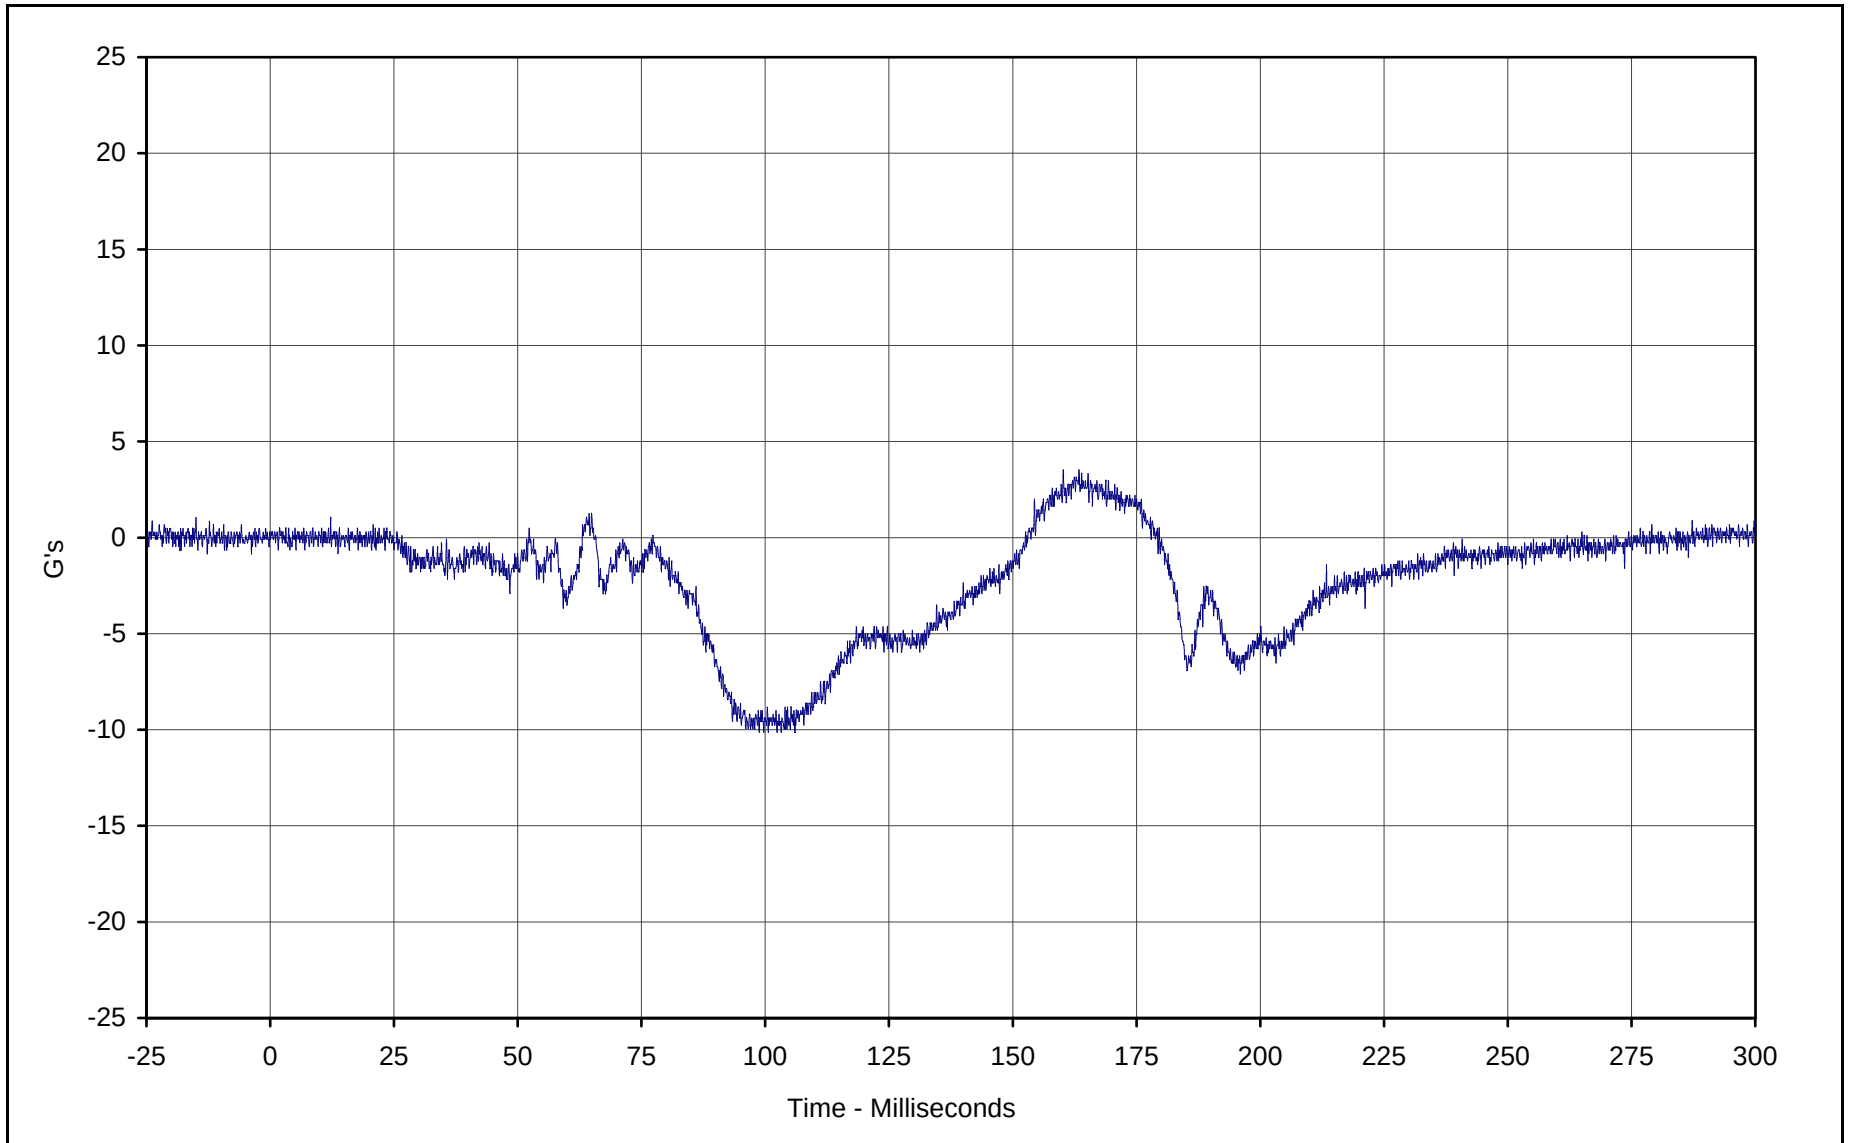


Curve Description: Driver Head Redundant Y
Maximum Value: 3.5 at 160.2 Milliseconds
Minimum Value: -10.1 at 98.8 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: FIL-005

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

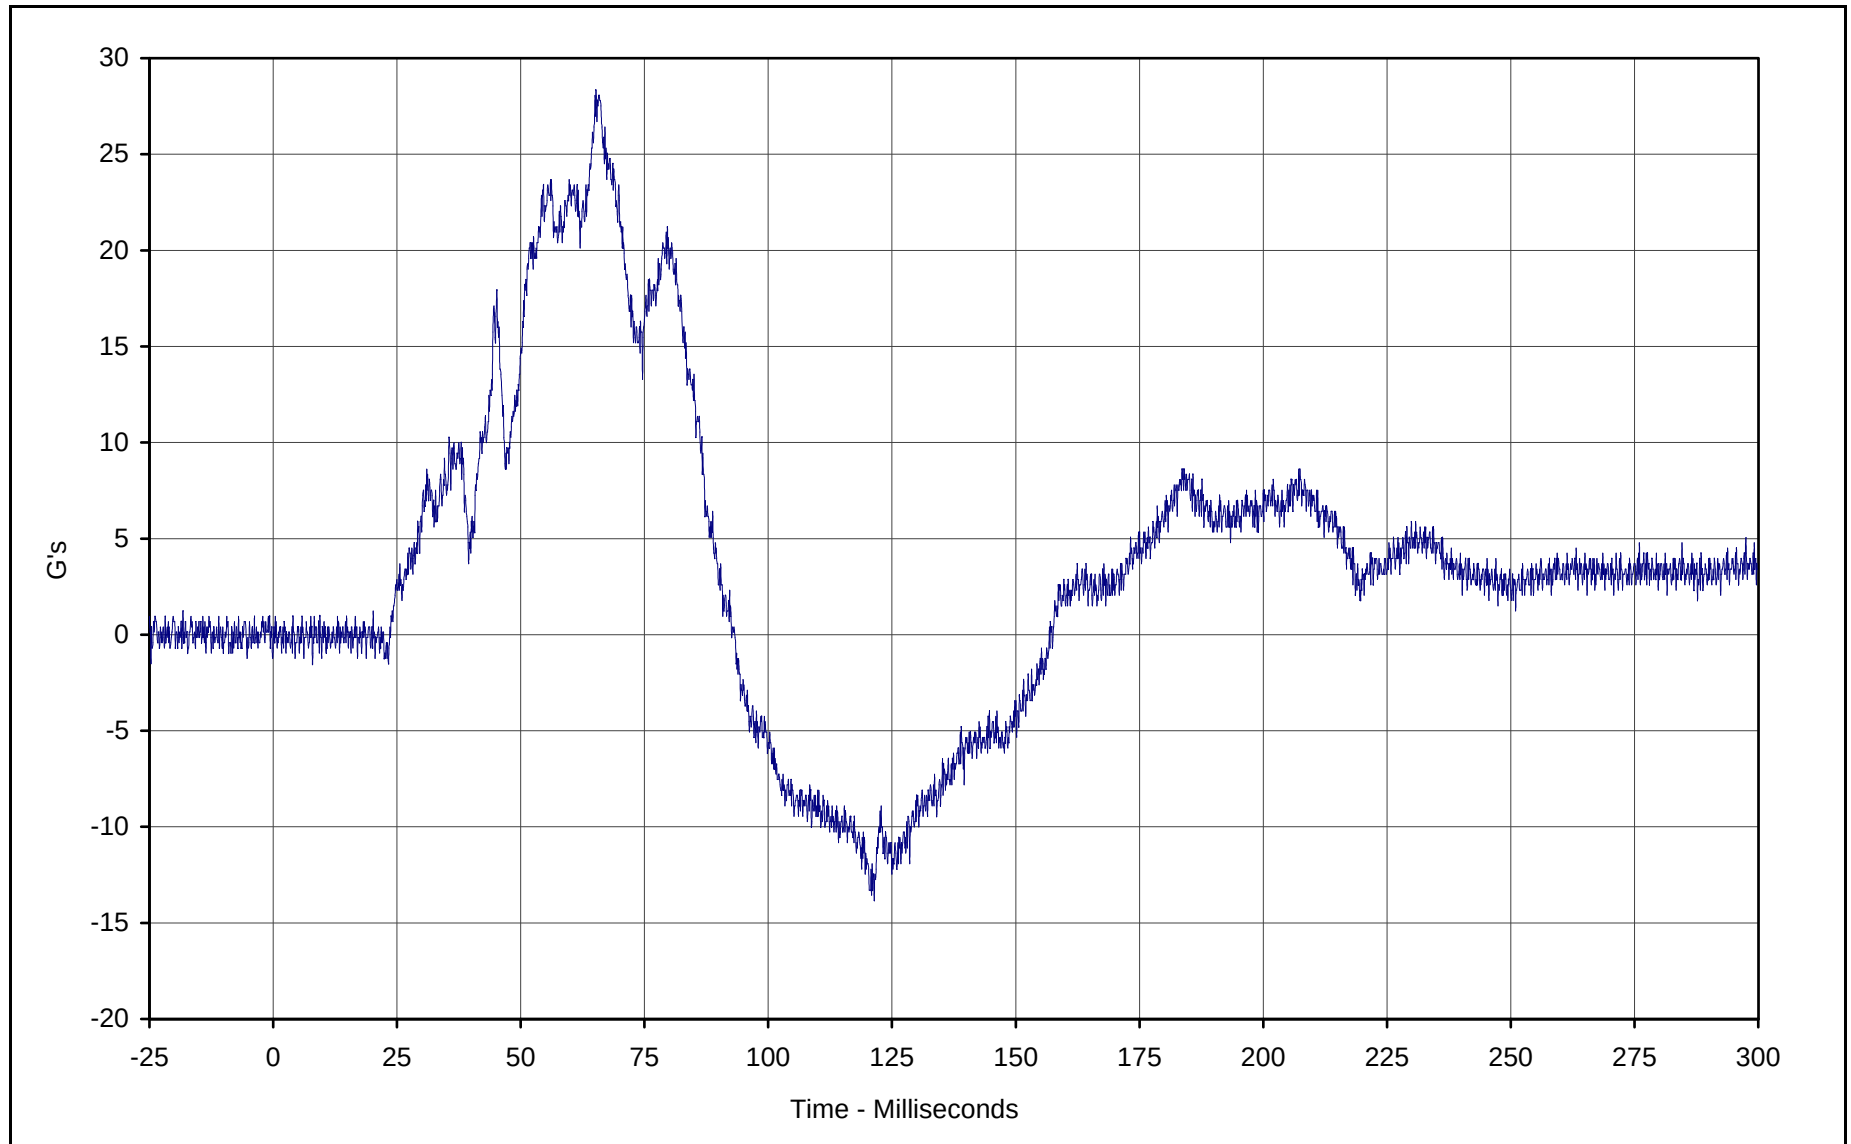


Curve Description: Driver Head Redundant Z
Maximum Value: 28.3 at 65.2 Milliseconds
Minimum Value: -13.8 at 121.4 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: FIL-006

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-12

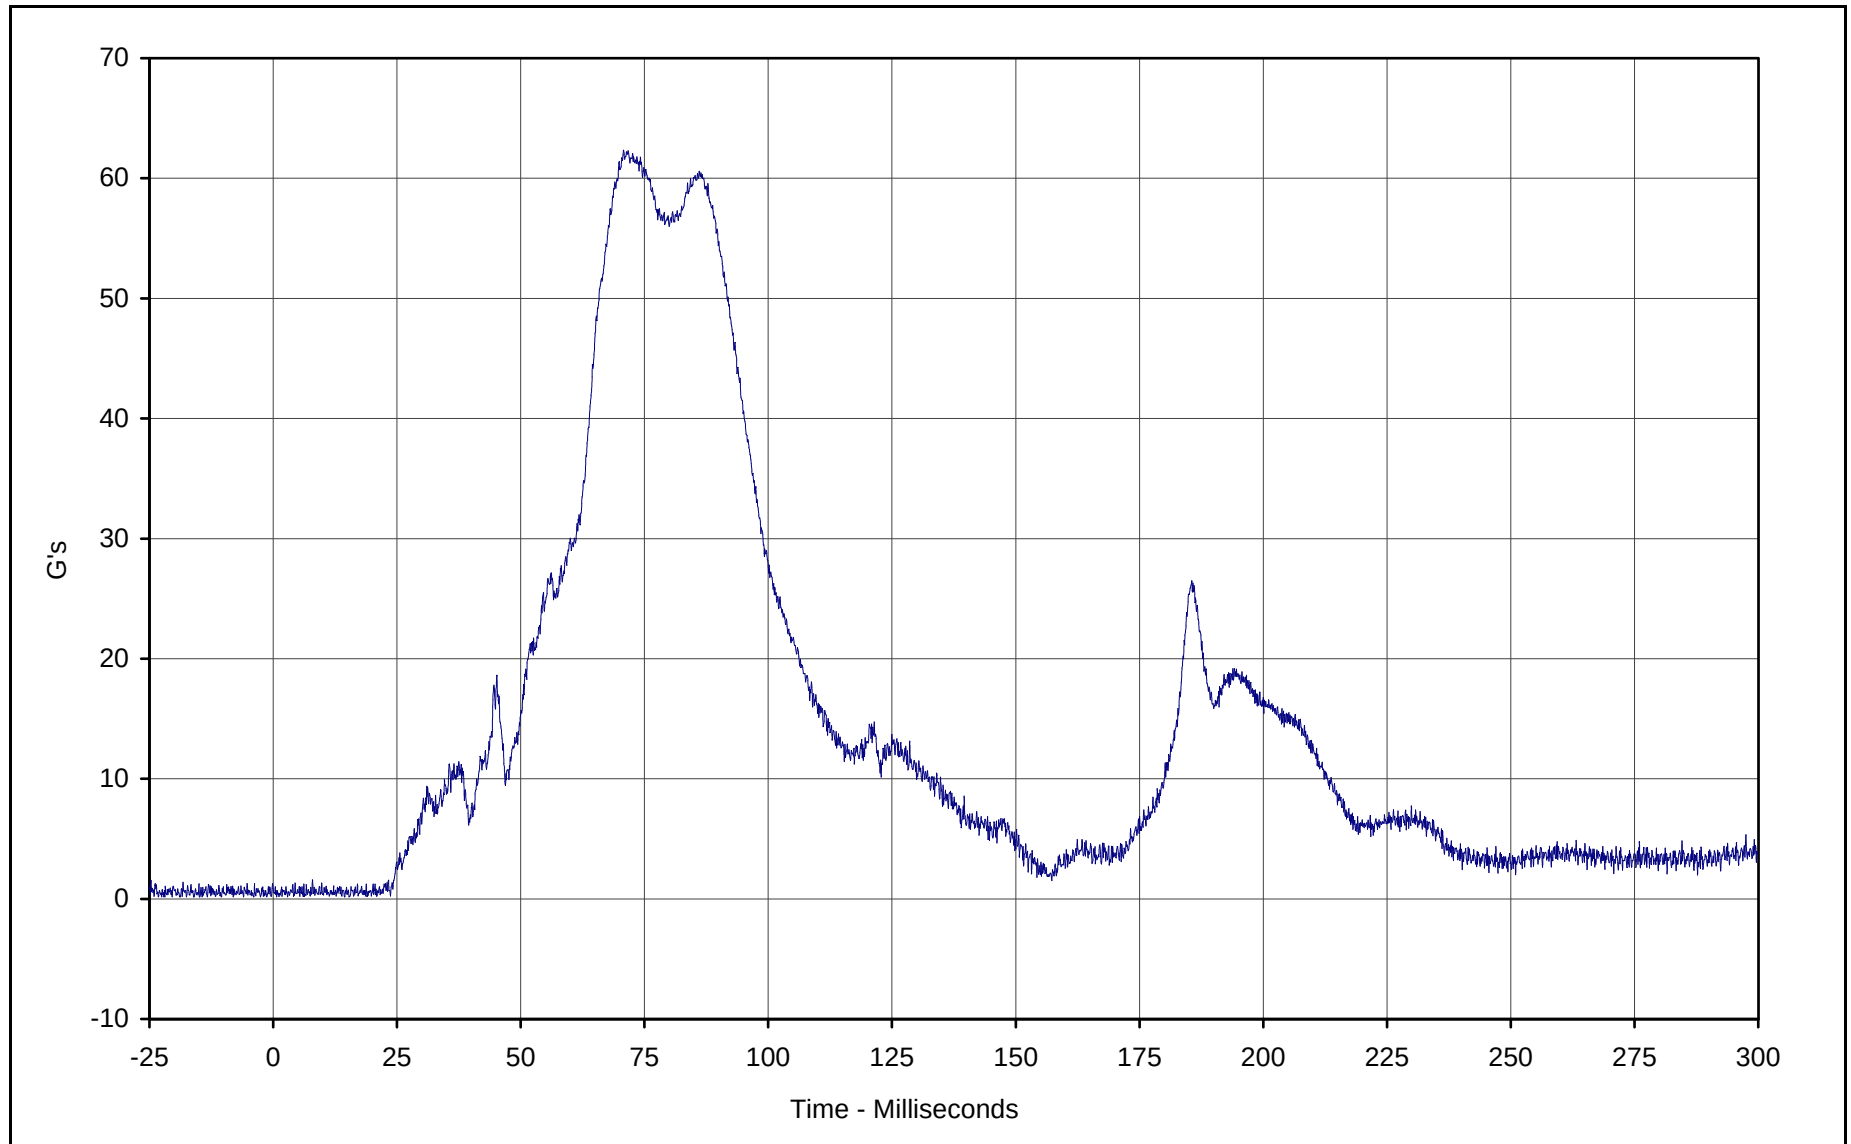


Curve Description: Driver Head Resultant Redundant
Maximum Value: 62.3 at 70.8 Milliseconds
Minimum Value: 0.2 at 2.9 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: RES-004

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup




KAR21001-10

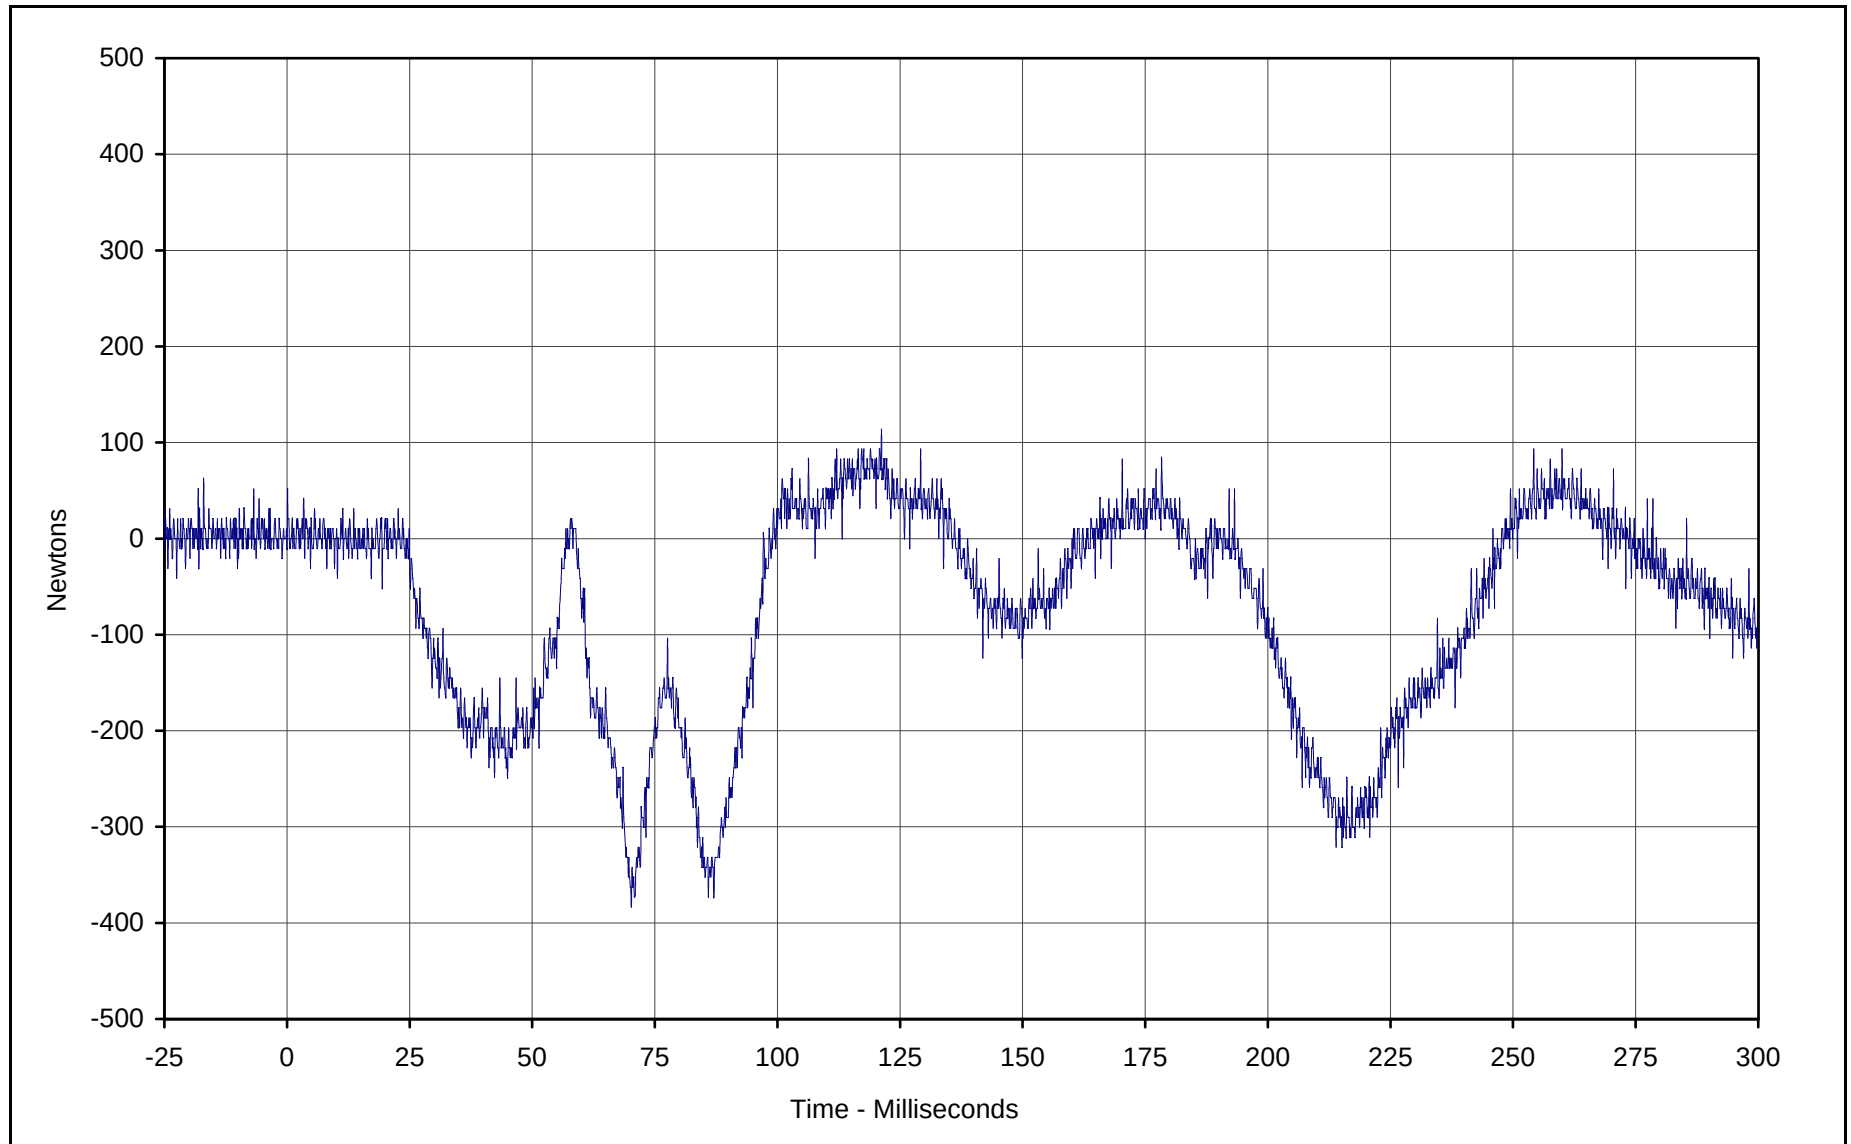

Curve Description: Driver Neck Force X
Maximum Value: 114.0 at 121.2 Milliseconds
Minimum Value: -383.6 at 70.2 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: FIL-007

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup




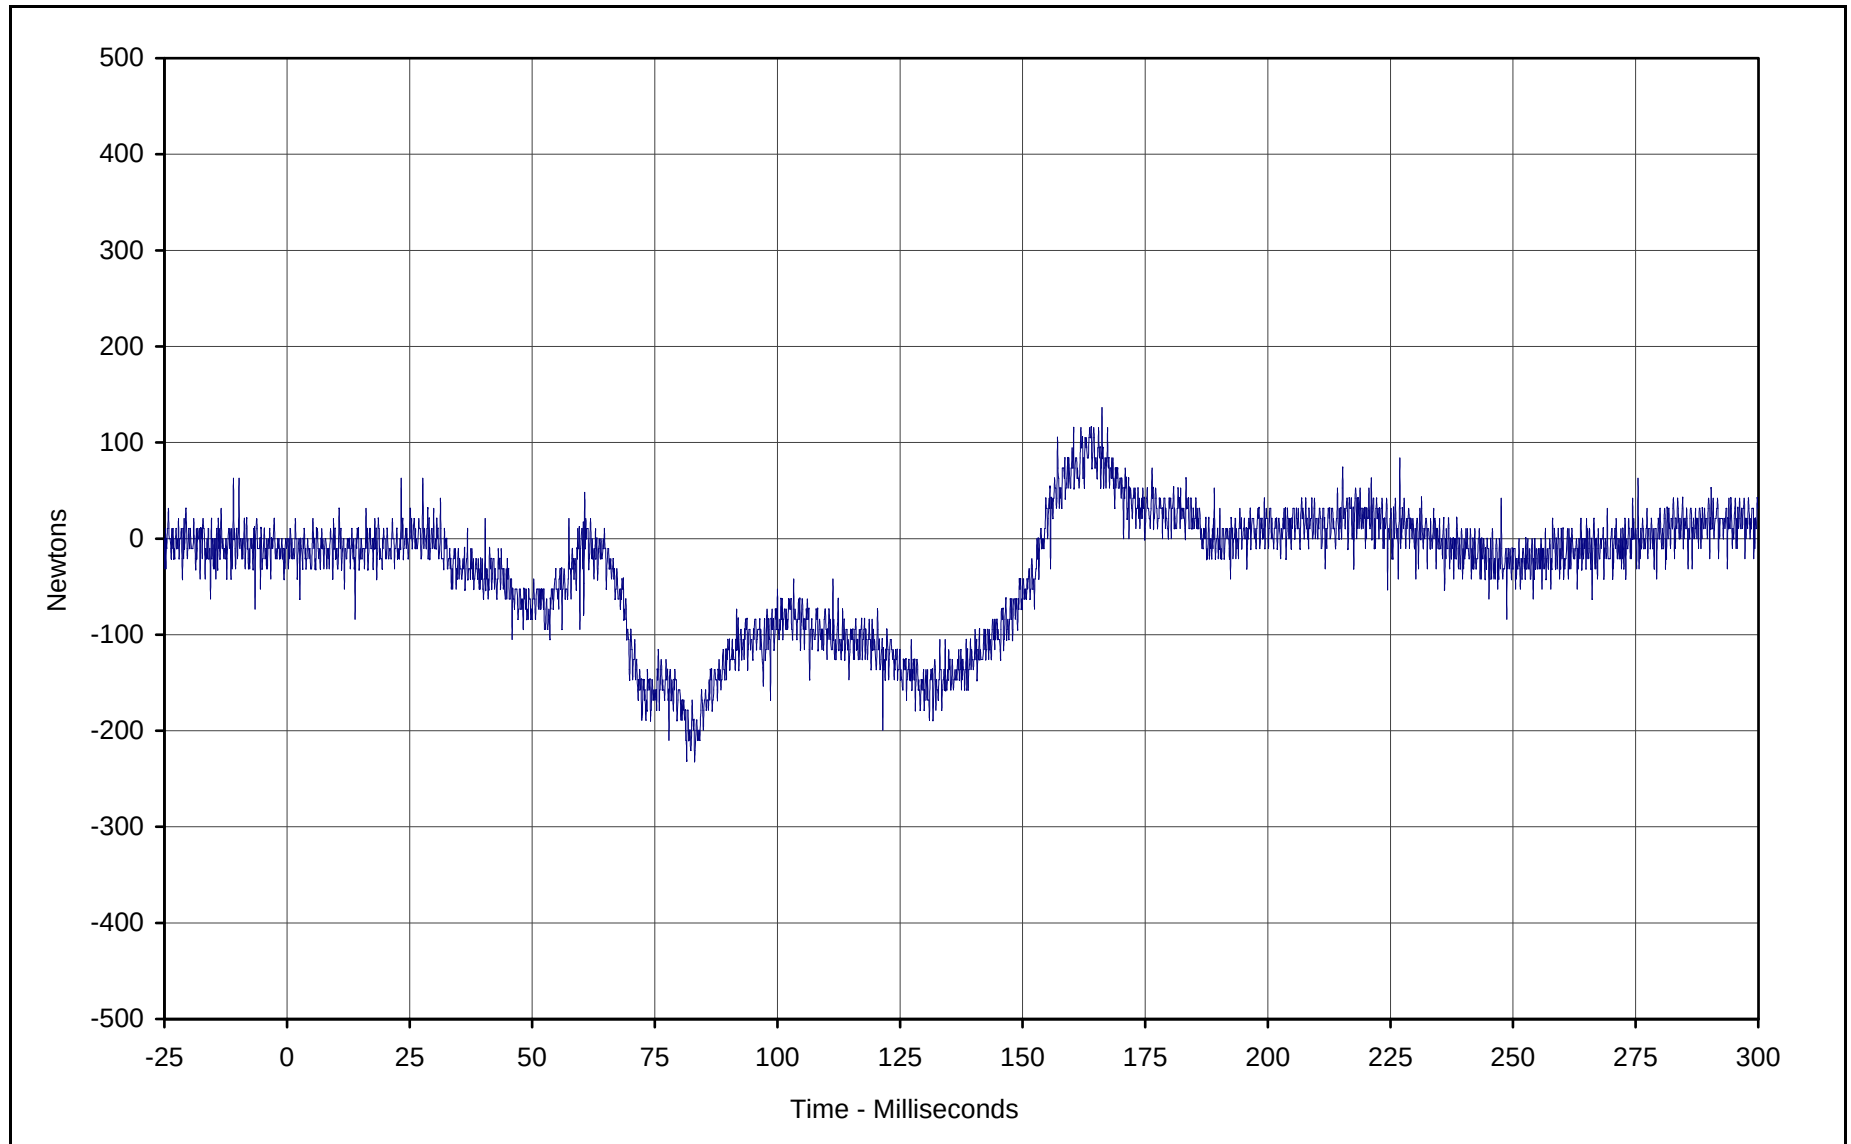

Curve Description: Driver Neck Force Y
Maximum Value: 136.5 at 166.2 Milliseconds
Minimum Value: -231.0 at 81.5 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: FIL-008

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup




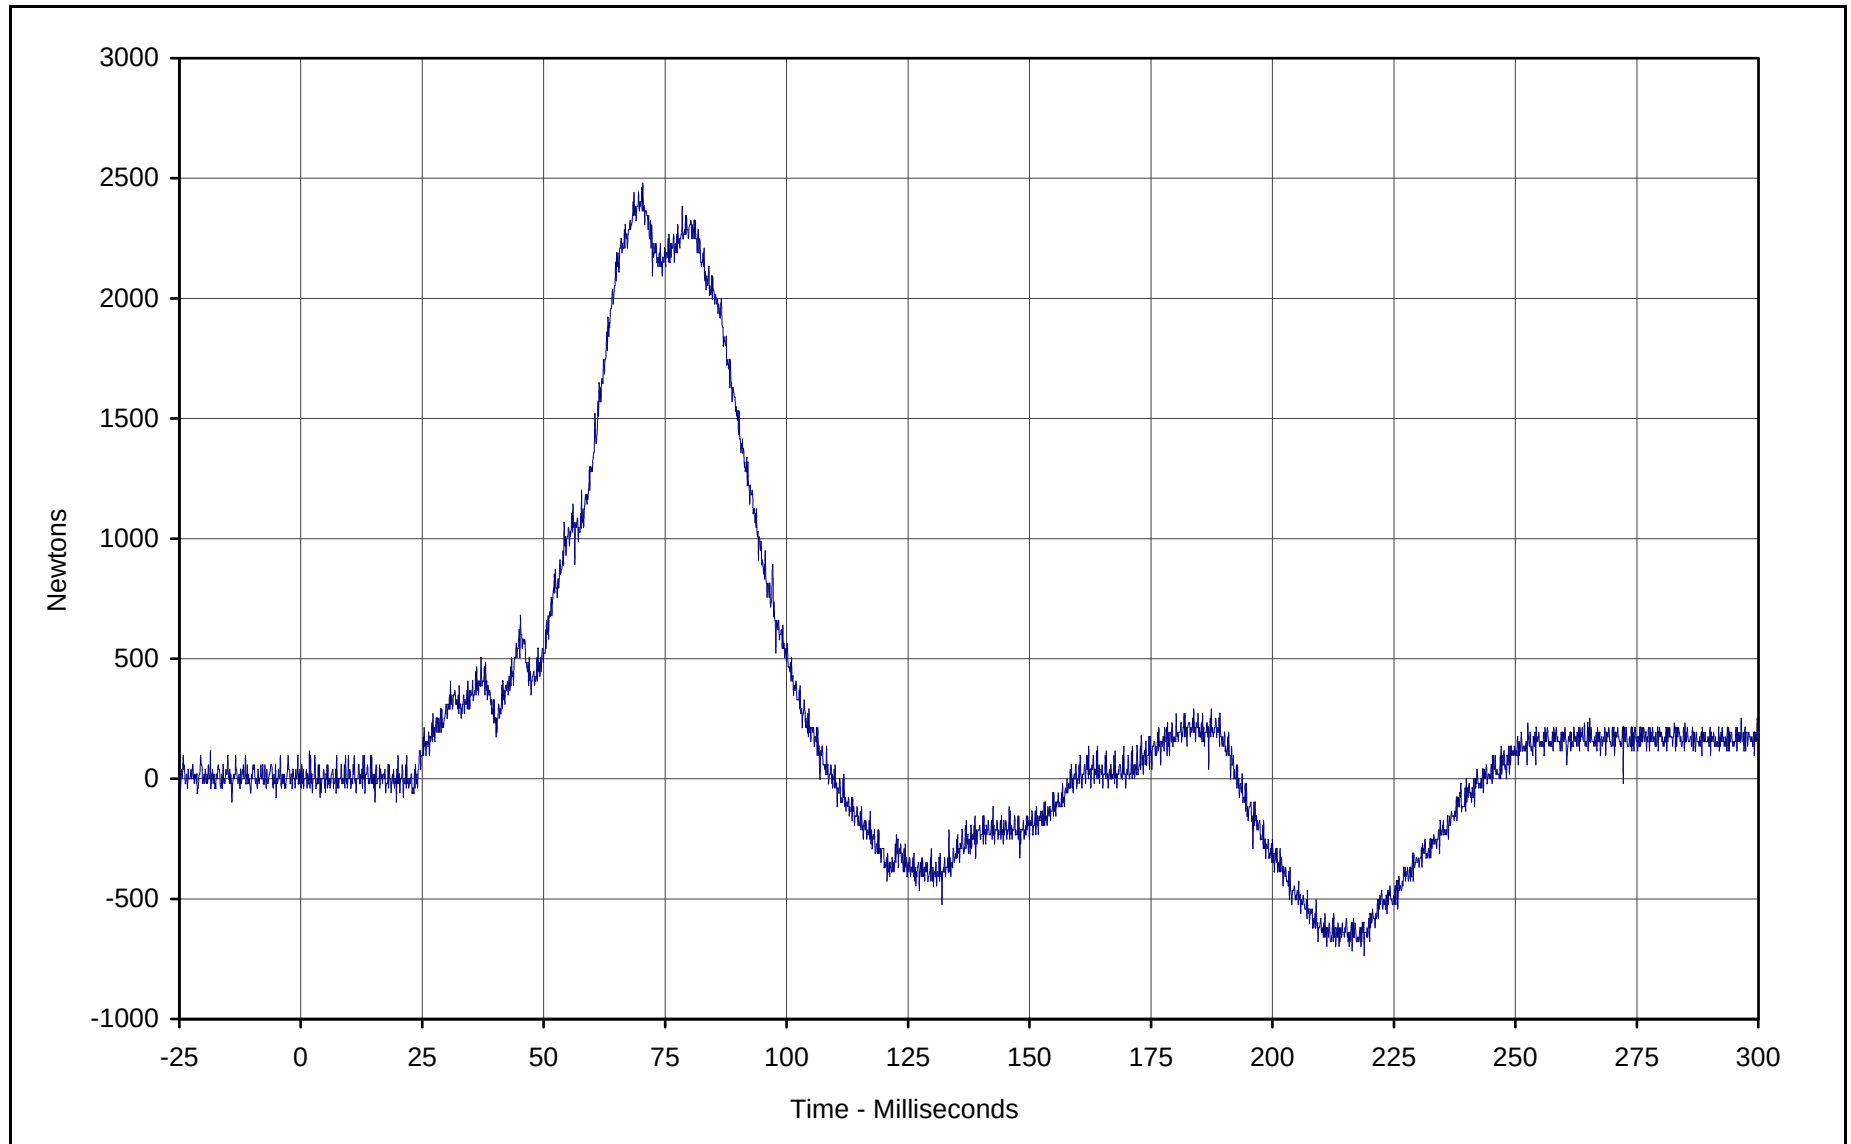

Curve Description: Driver Neck Force Z
Maximum Value: 2480.4 at 70.4 Milliseconds
Minimum Value: -736.4 at 218.9 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: FIL-009

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup




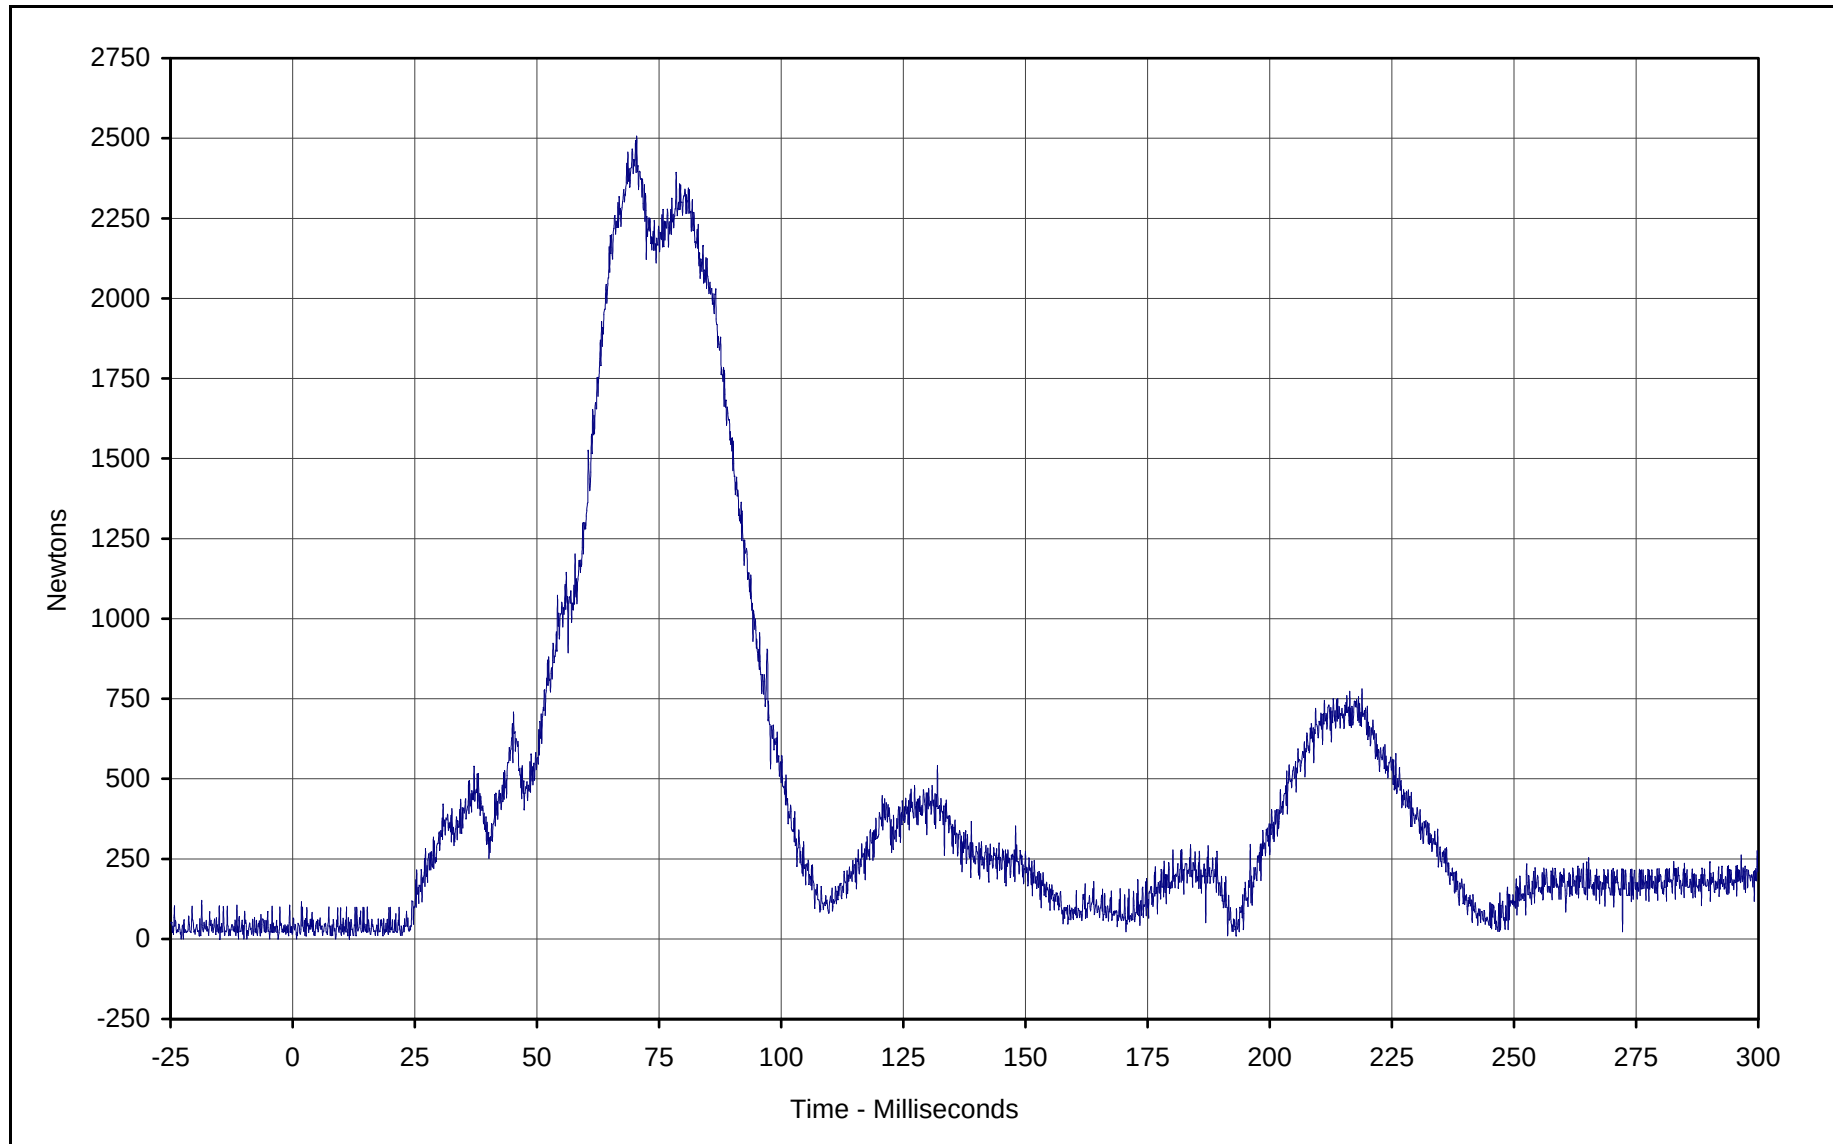

Curve Description: Driver Neck Force Resultant
Maximum Value: 2506.6 at 70.4 Milliseconds
Minimum Value: 0.0 at 0.8 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: RES-007

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup




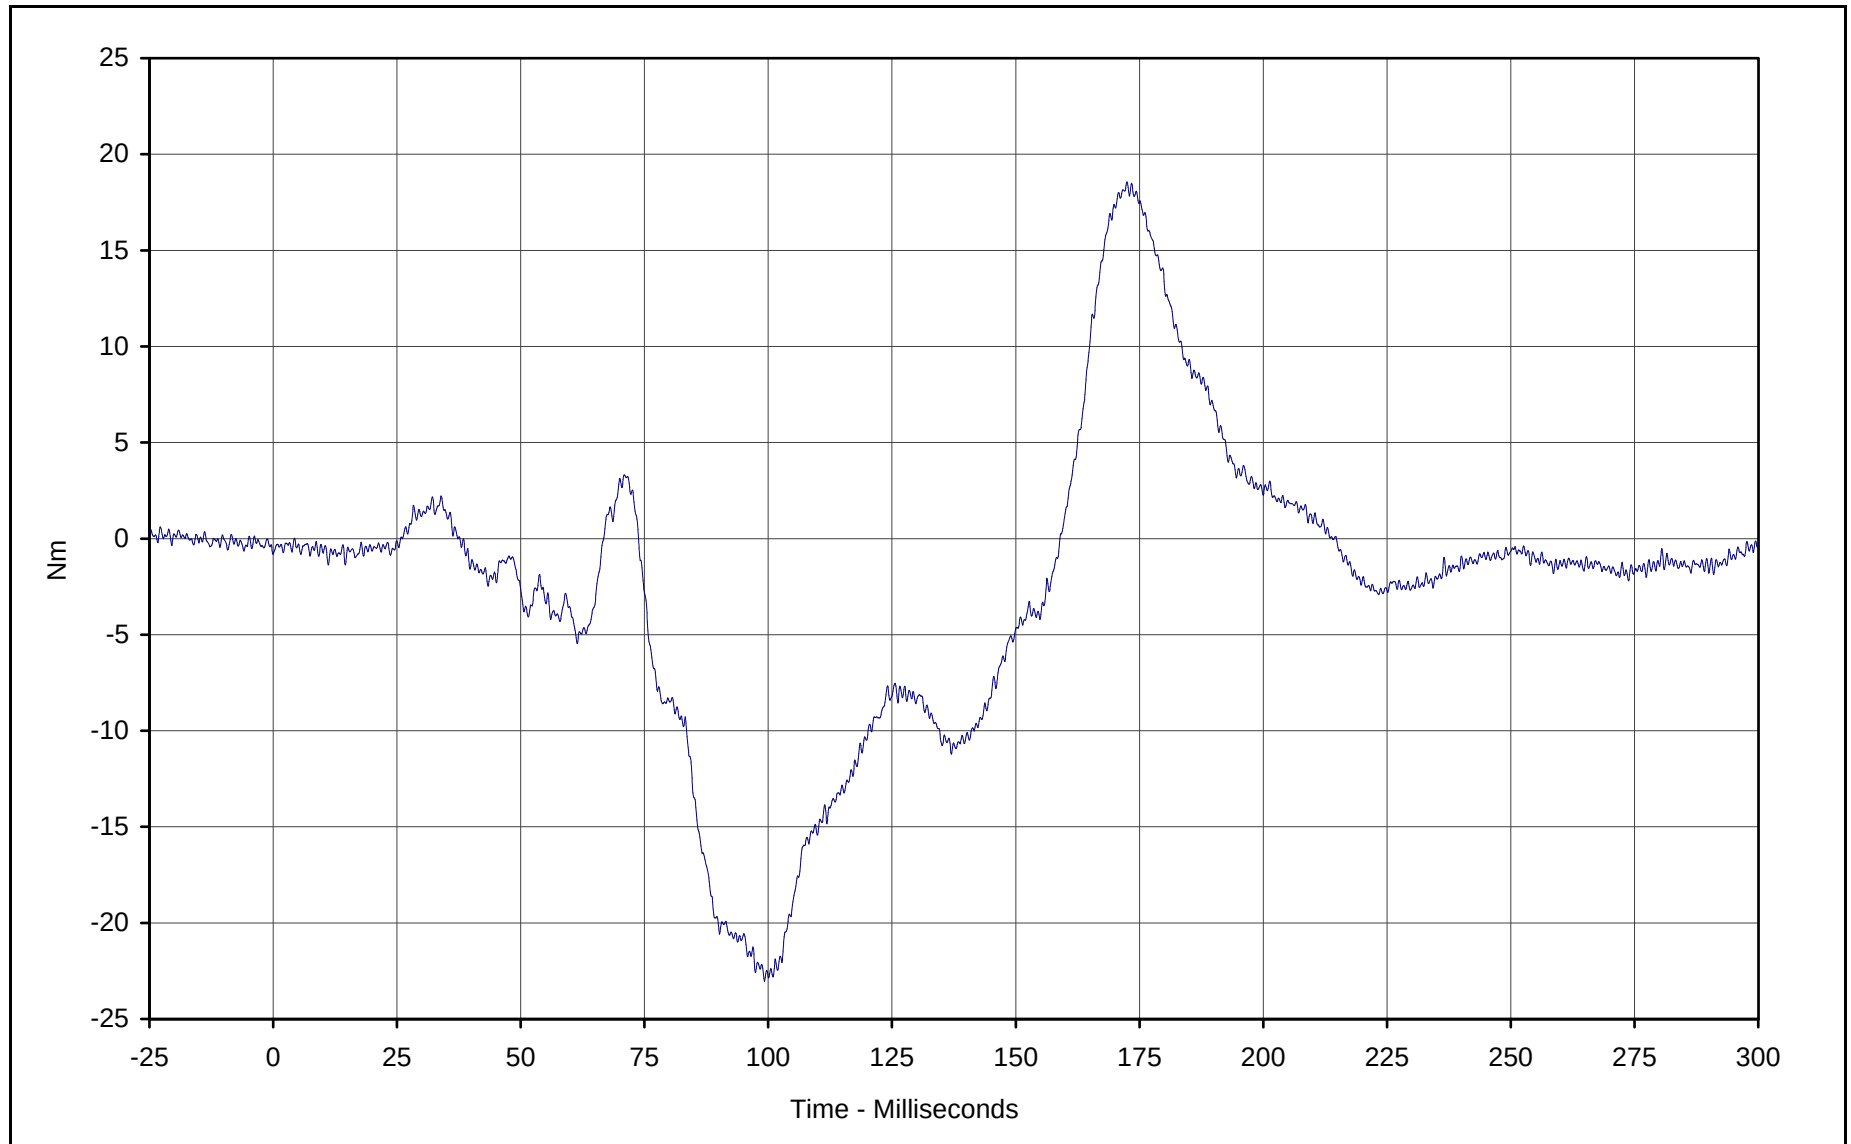

Curve Description: Driver Neck Moment X
Maximum Value: 18.6 at 172.5 Milliseconds
Minimum Value: -23.0 at 99.2 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: FIL-010

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup




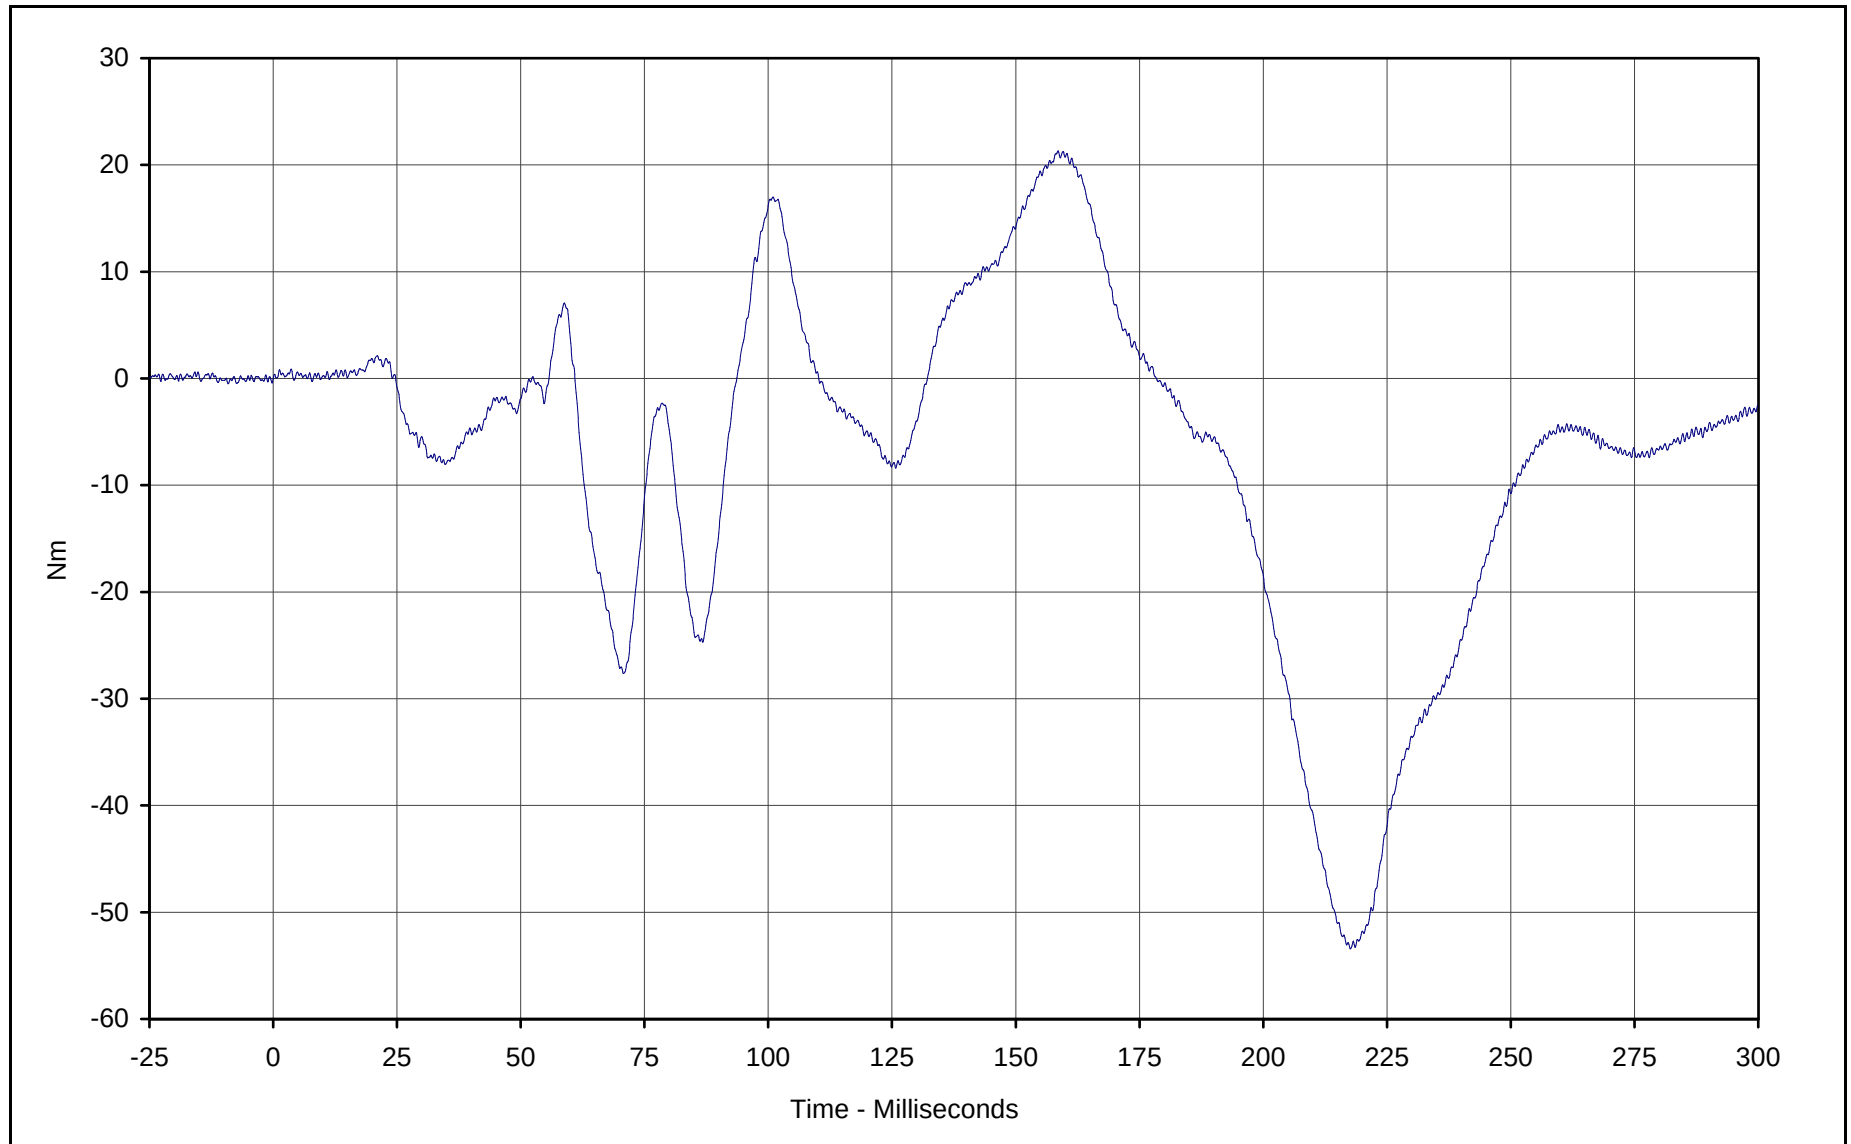

Curve Description: Driver Neck Moment Y
Maximum Value: 21.3 at 158.6 Milliseconds
Minimum Value: -53.4 at 217.6 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: FIL-011

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



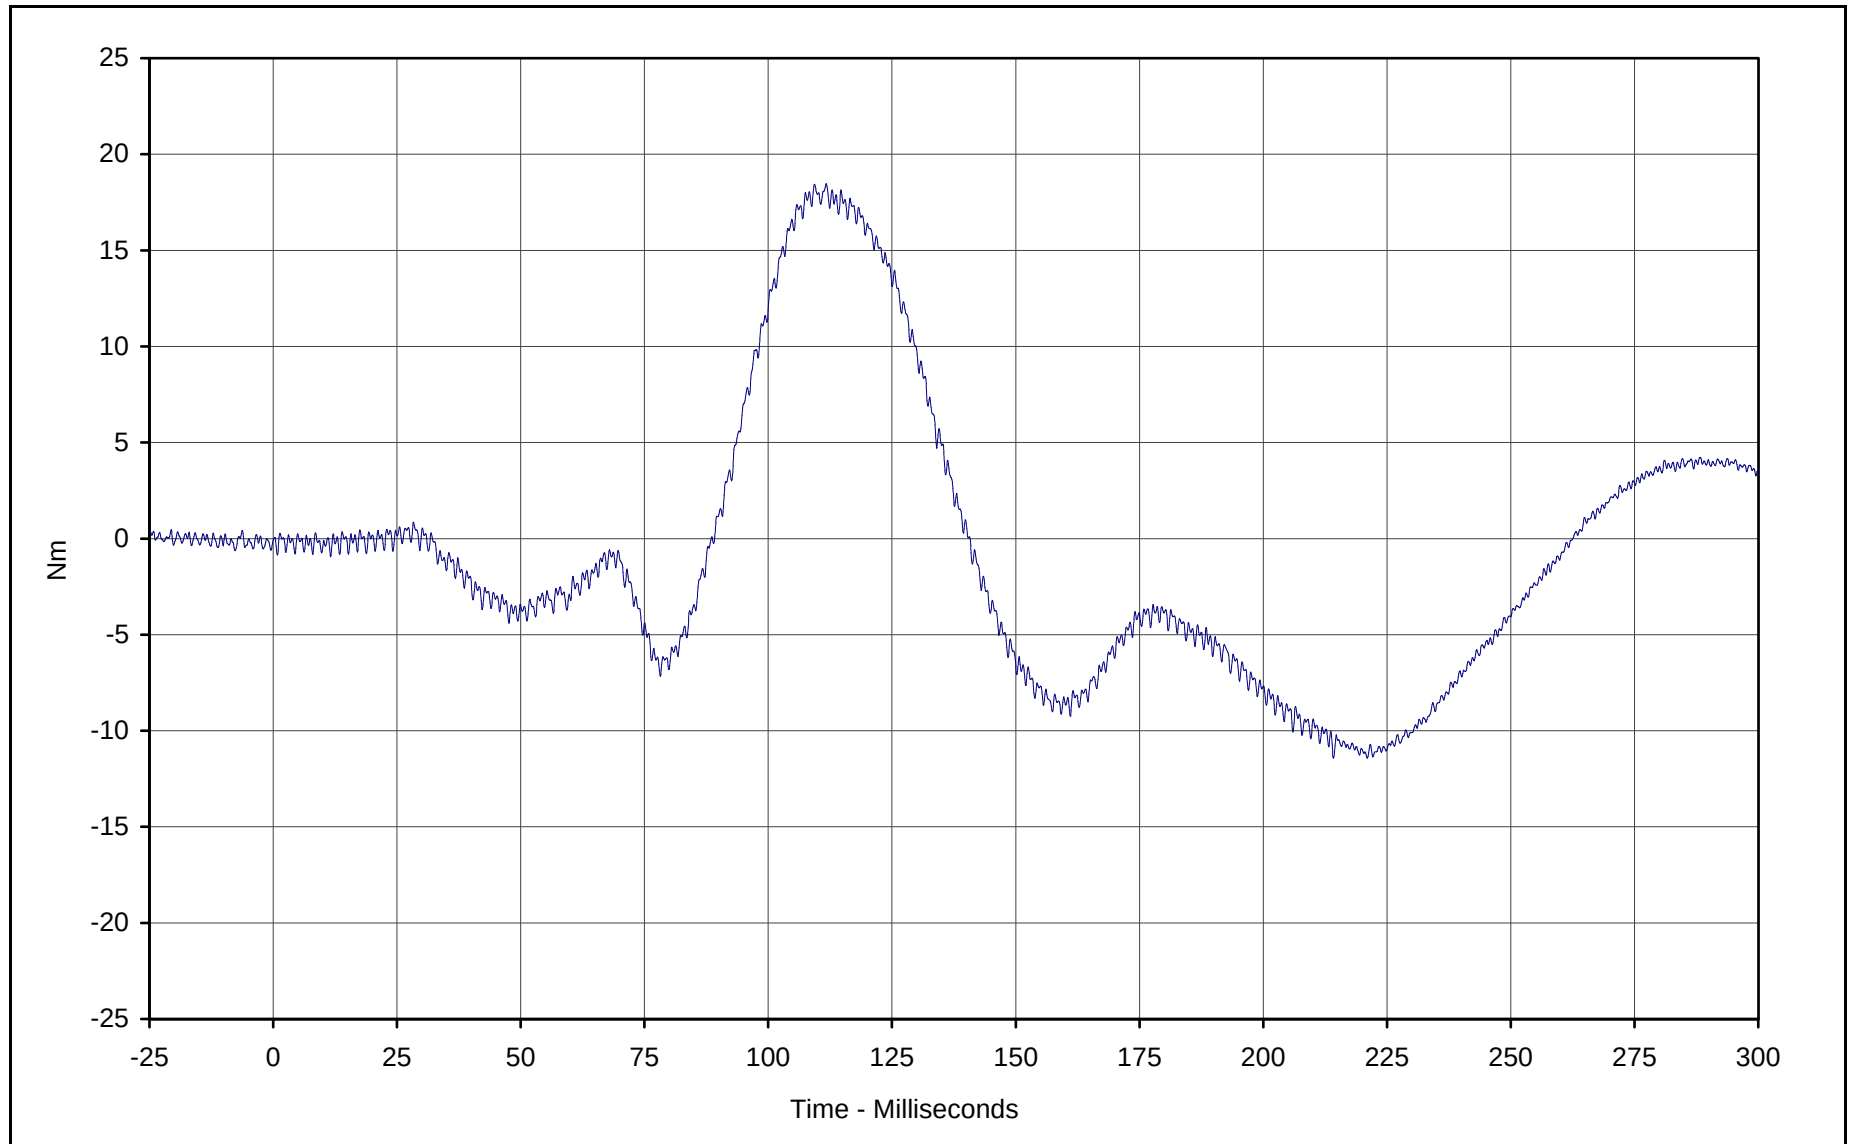


Curve Description: Driver Neck Moment Z
Maximum Value: 18.5 at 111.7 Milliseconds
Minimum Value: -11.4 at 221.0 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: FIL-012

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-20

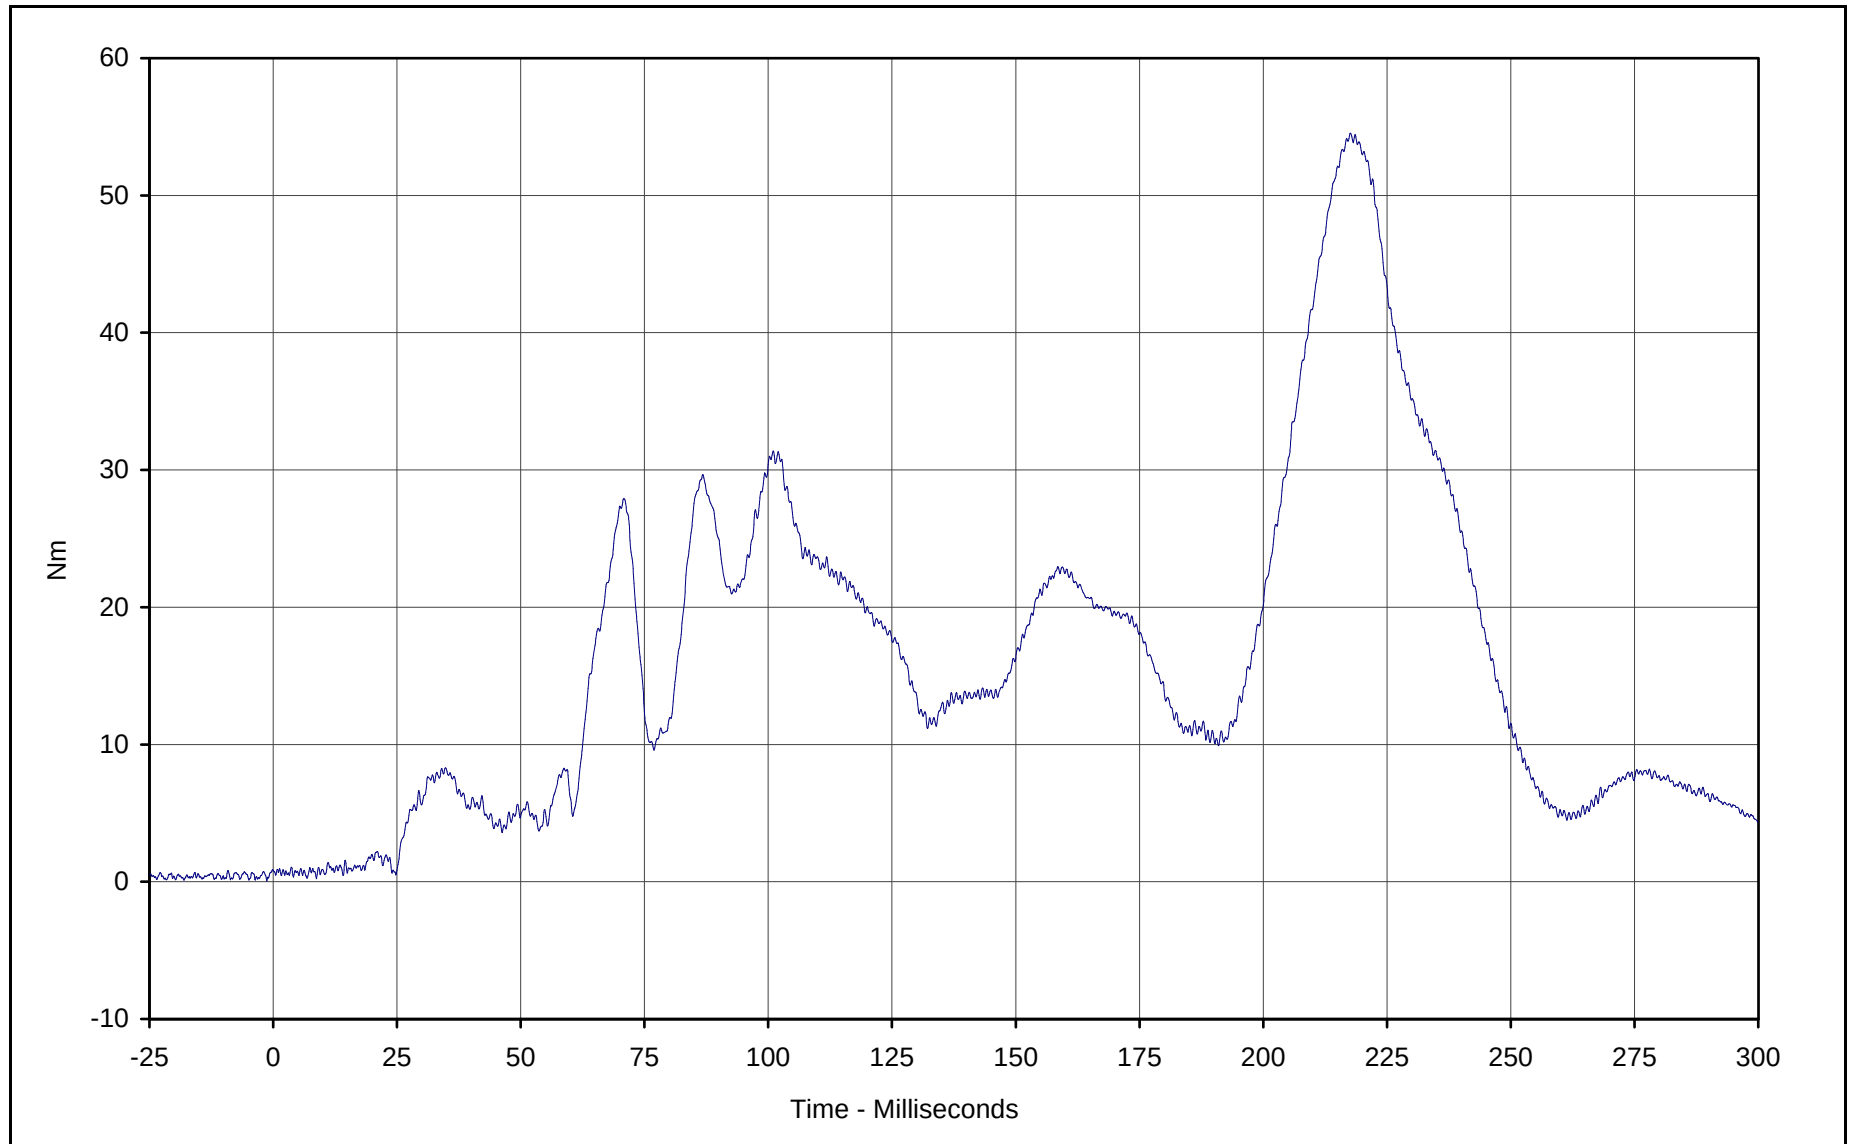


Curve Description: Driver Neck Moment Resultant
Maximum Value: 54.5 at 217.6 Milliseconds
Minimum Value: 0.2 at 8.7 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: RES-010

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-21

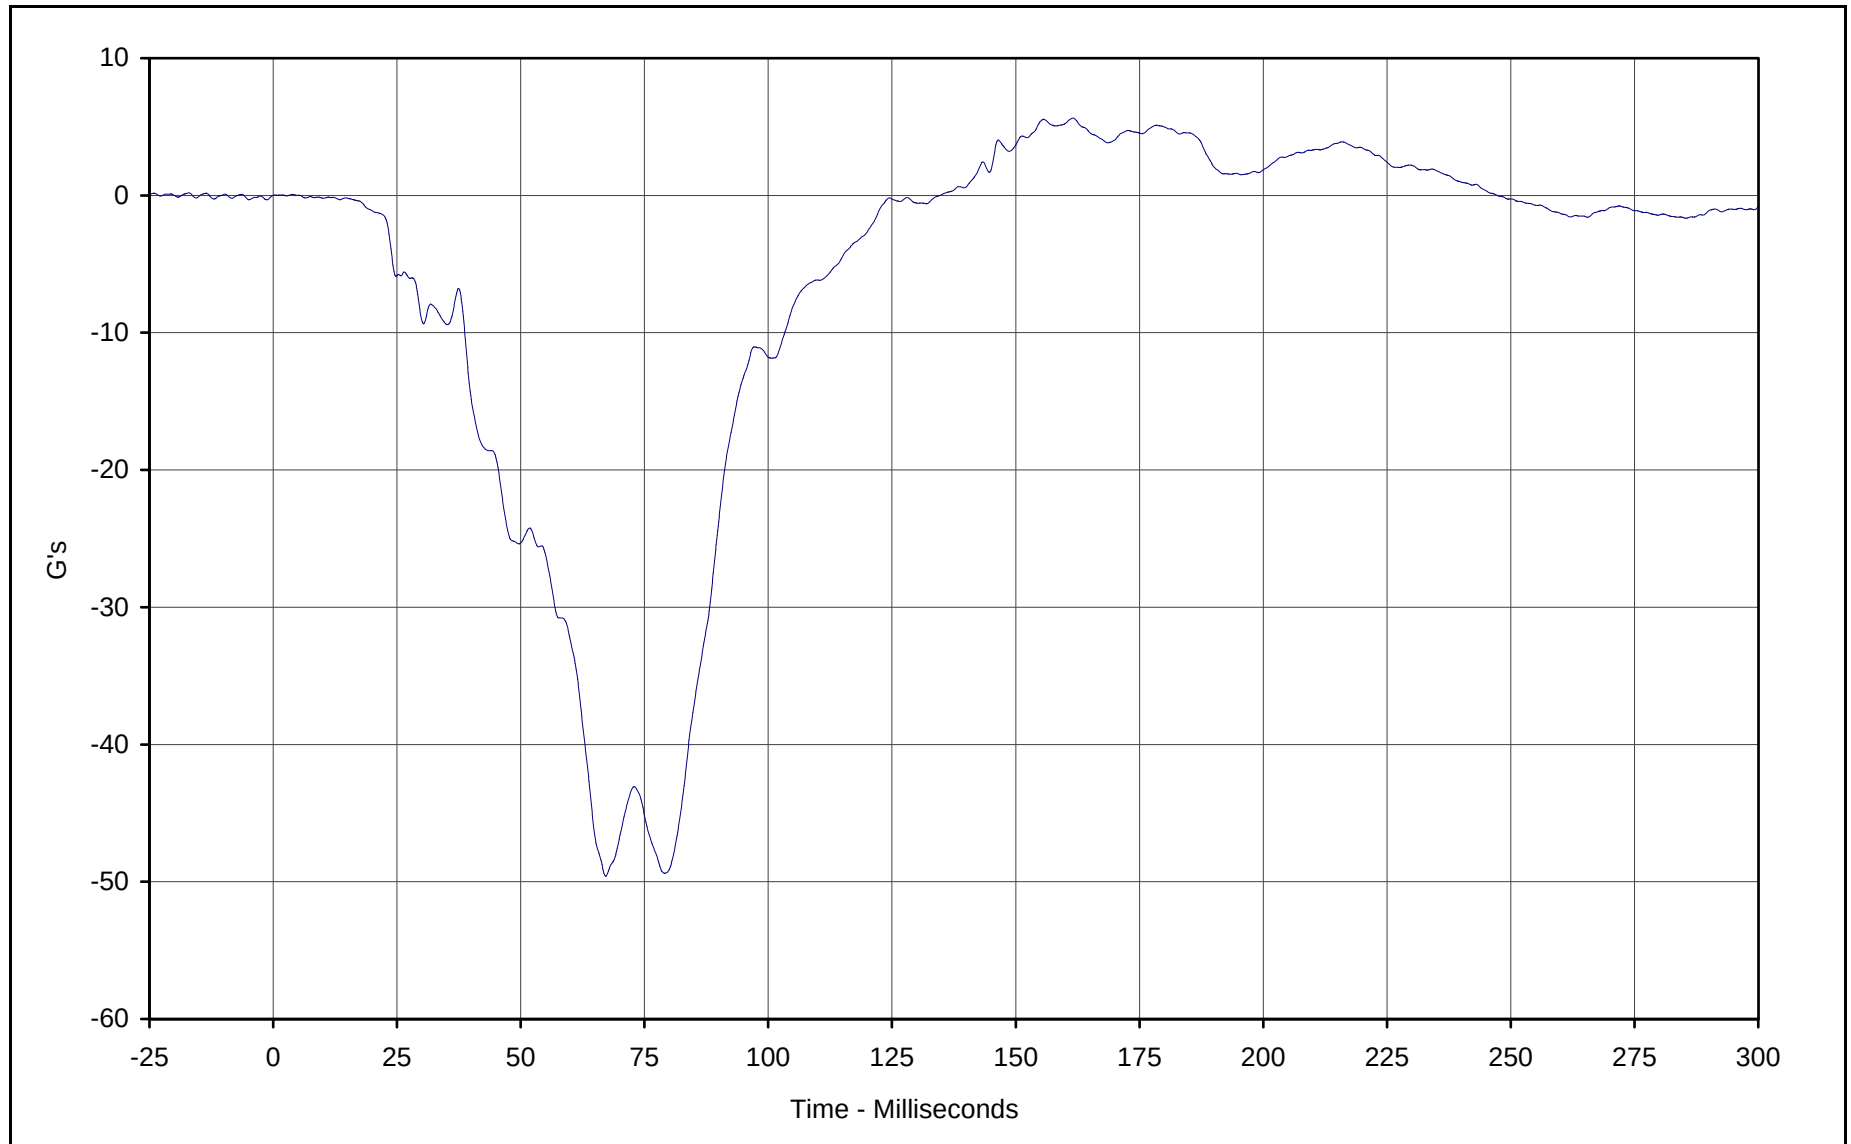


Curve Description: Driver Chest Primary X
Maximum Value: 5.6 at 161.5 Milliseconds
Minimum Value: -49.6 at 67.2 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: FIL-013

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-22

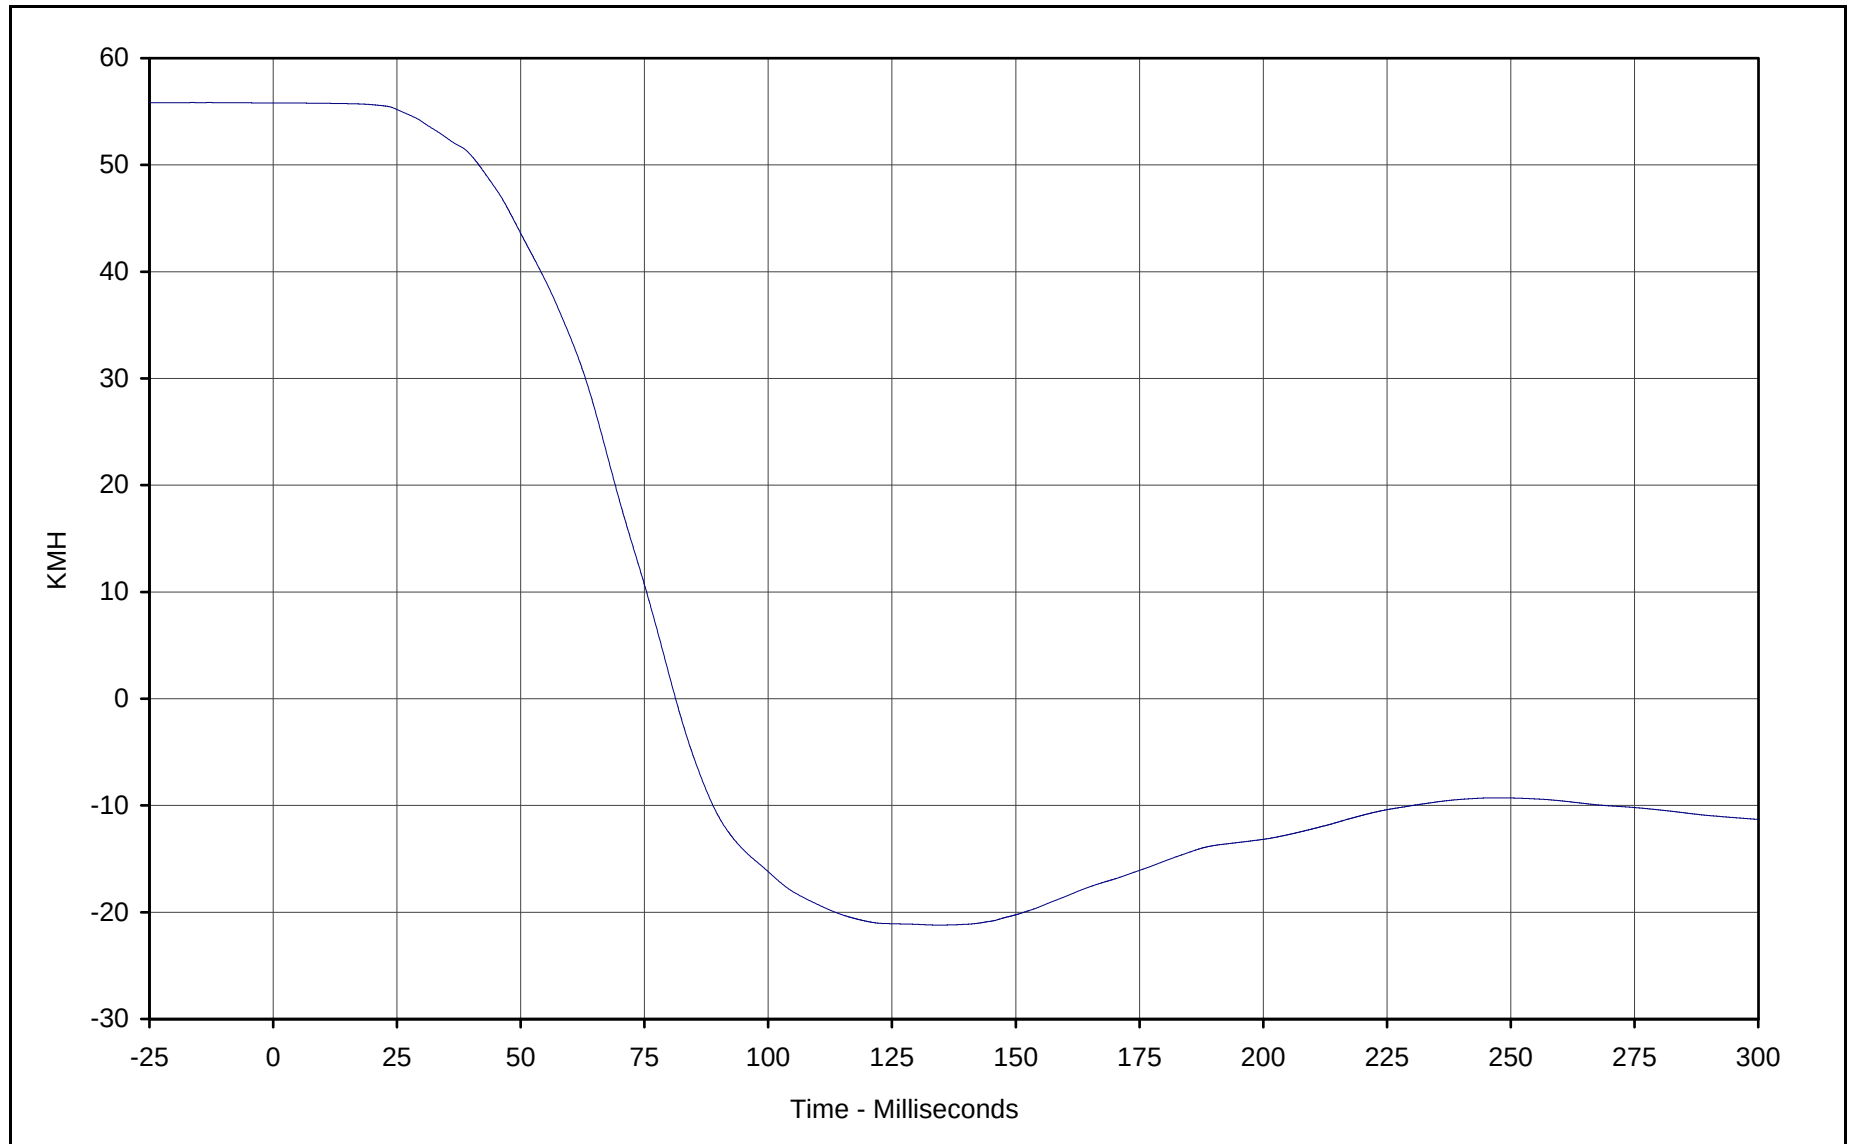


Curve Description: Driver Chest Primary X Velocity
Maximum Value: 55.8 at 5.4 Milliseconds
Minimum Value: -21.2 at 134.7 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: IN1-013

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-23

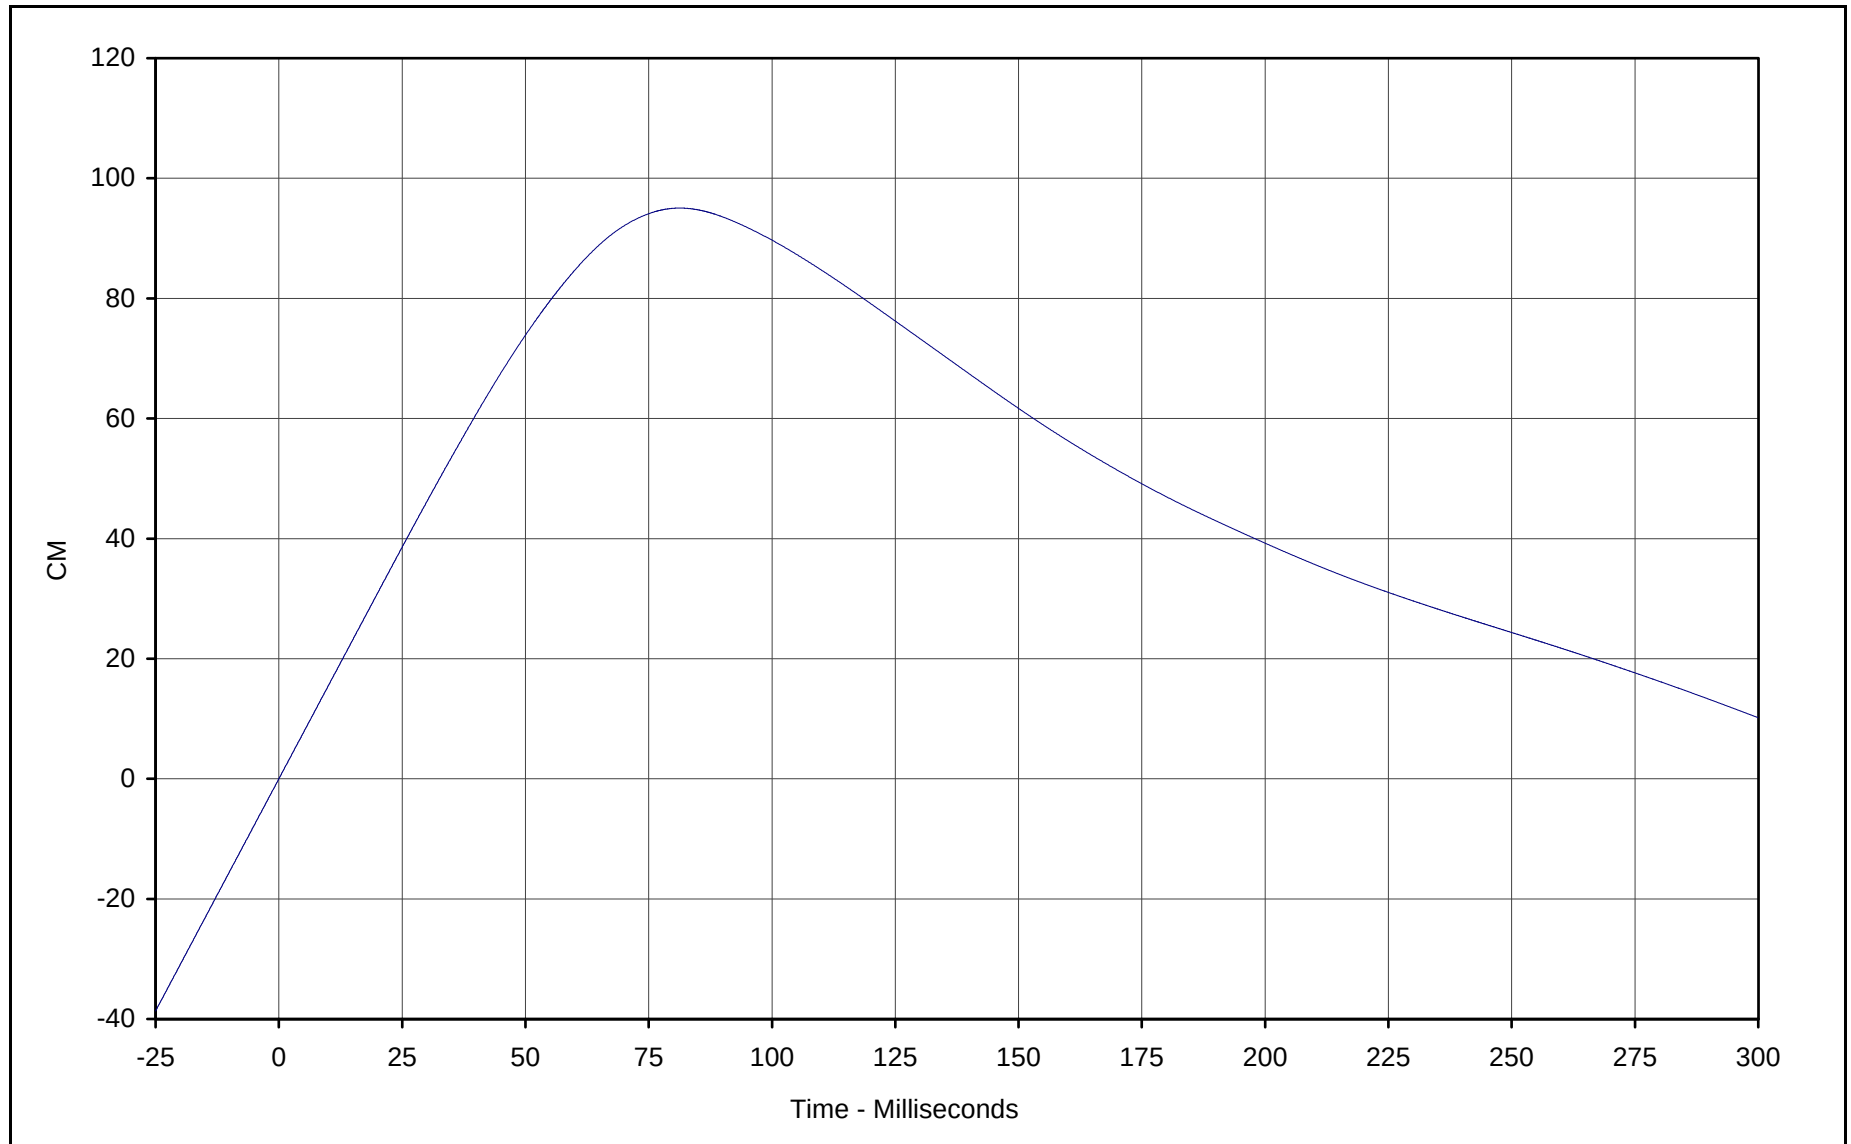


Curve Description: Driver Chest Primary X Displ.
Maximum Value: 95.0 at 81.3 Milliseconds
Minimum Value: 0.0 at 0.0 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: IN2-013

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

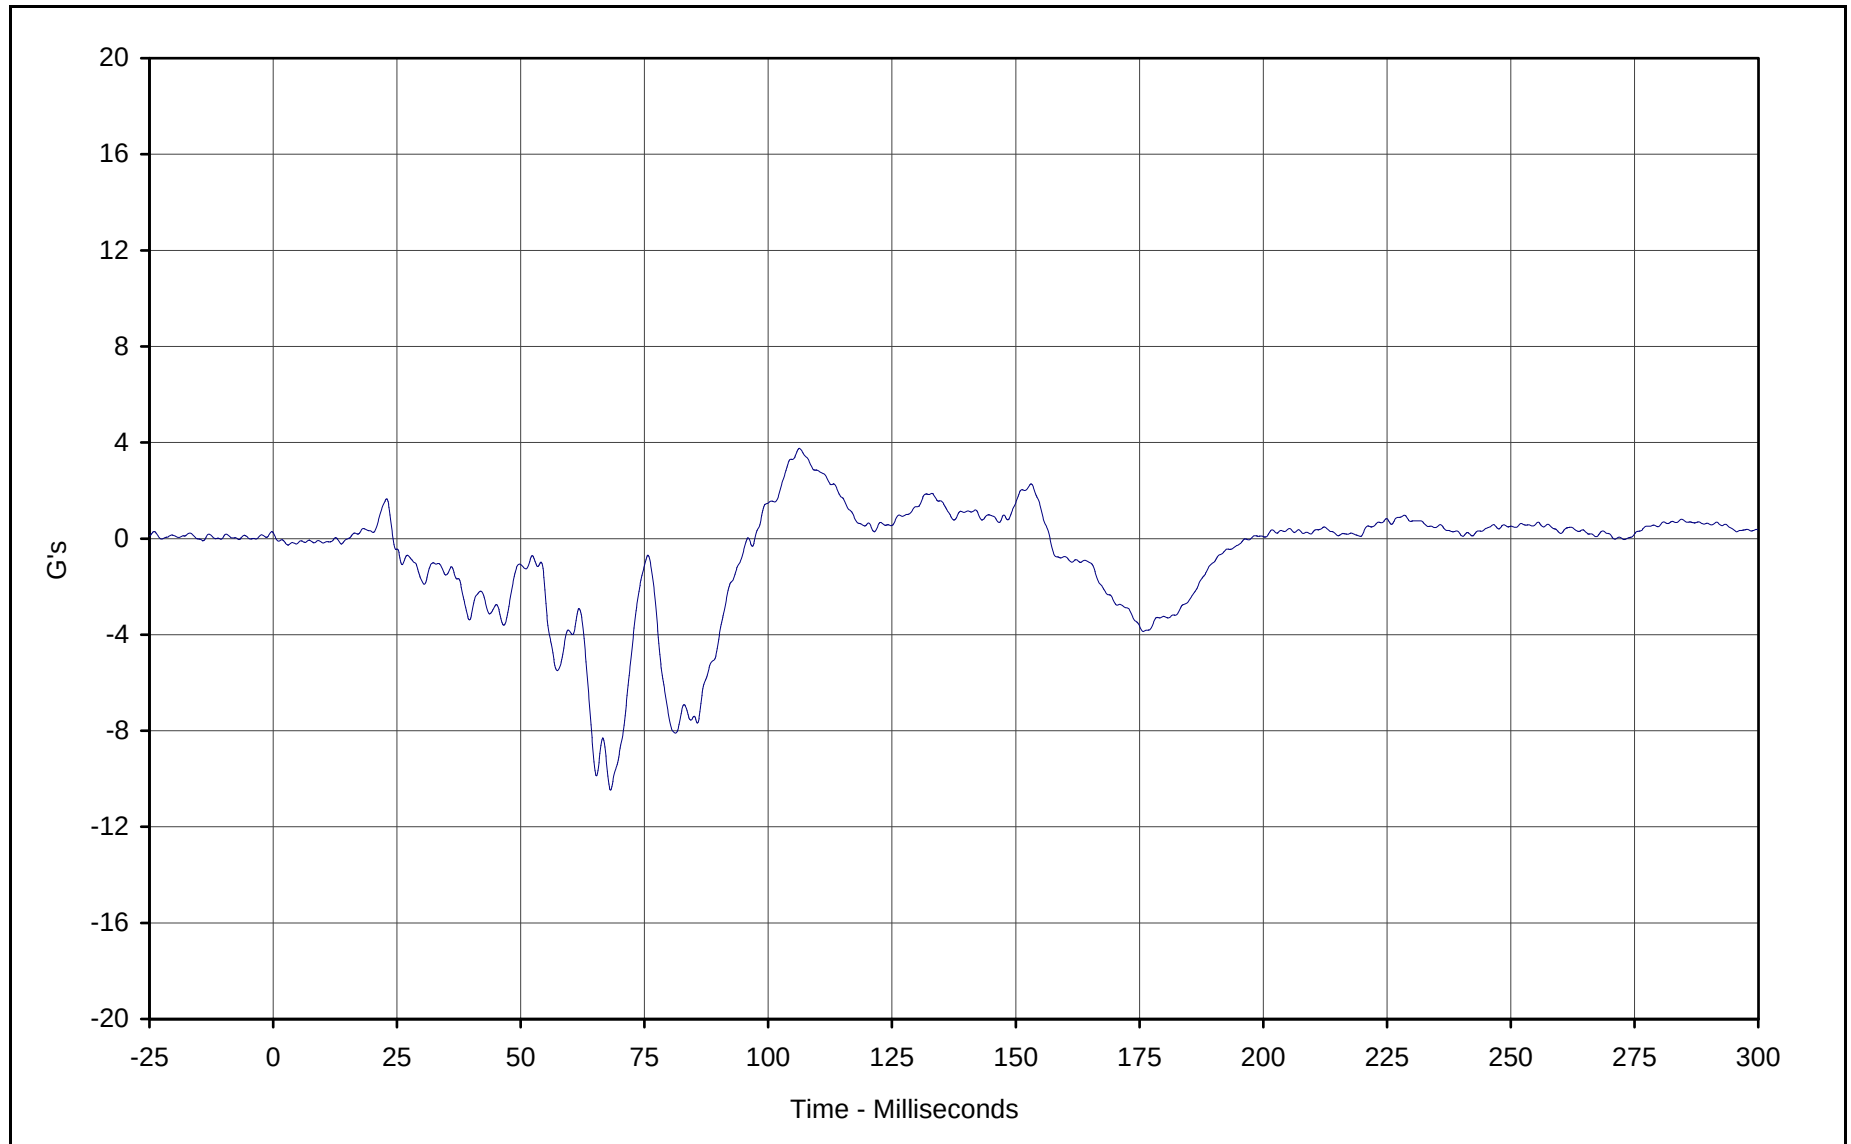


Curve Description: Driver Chest Primary Y
Maximum Value: 3.8 at 106.3 Milliseconds
Minimum Value: -10.5 at 68.1 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: FIL-014

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-25

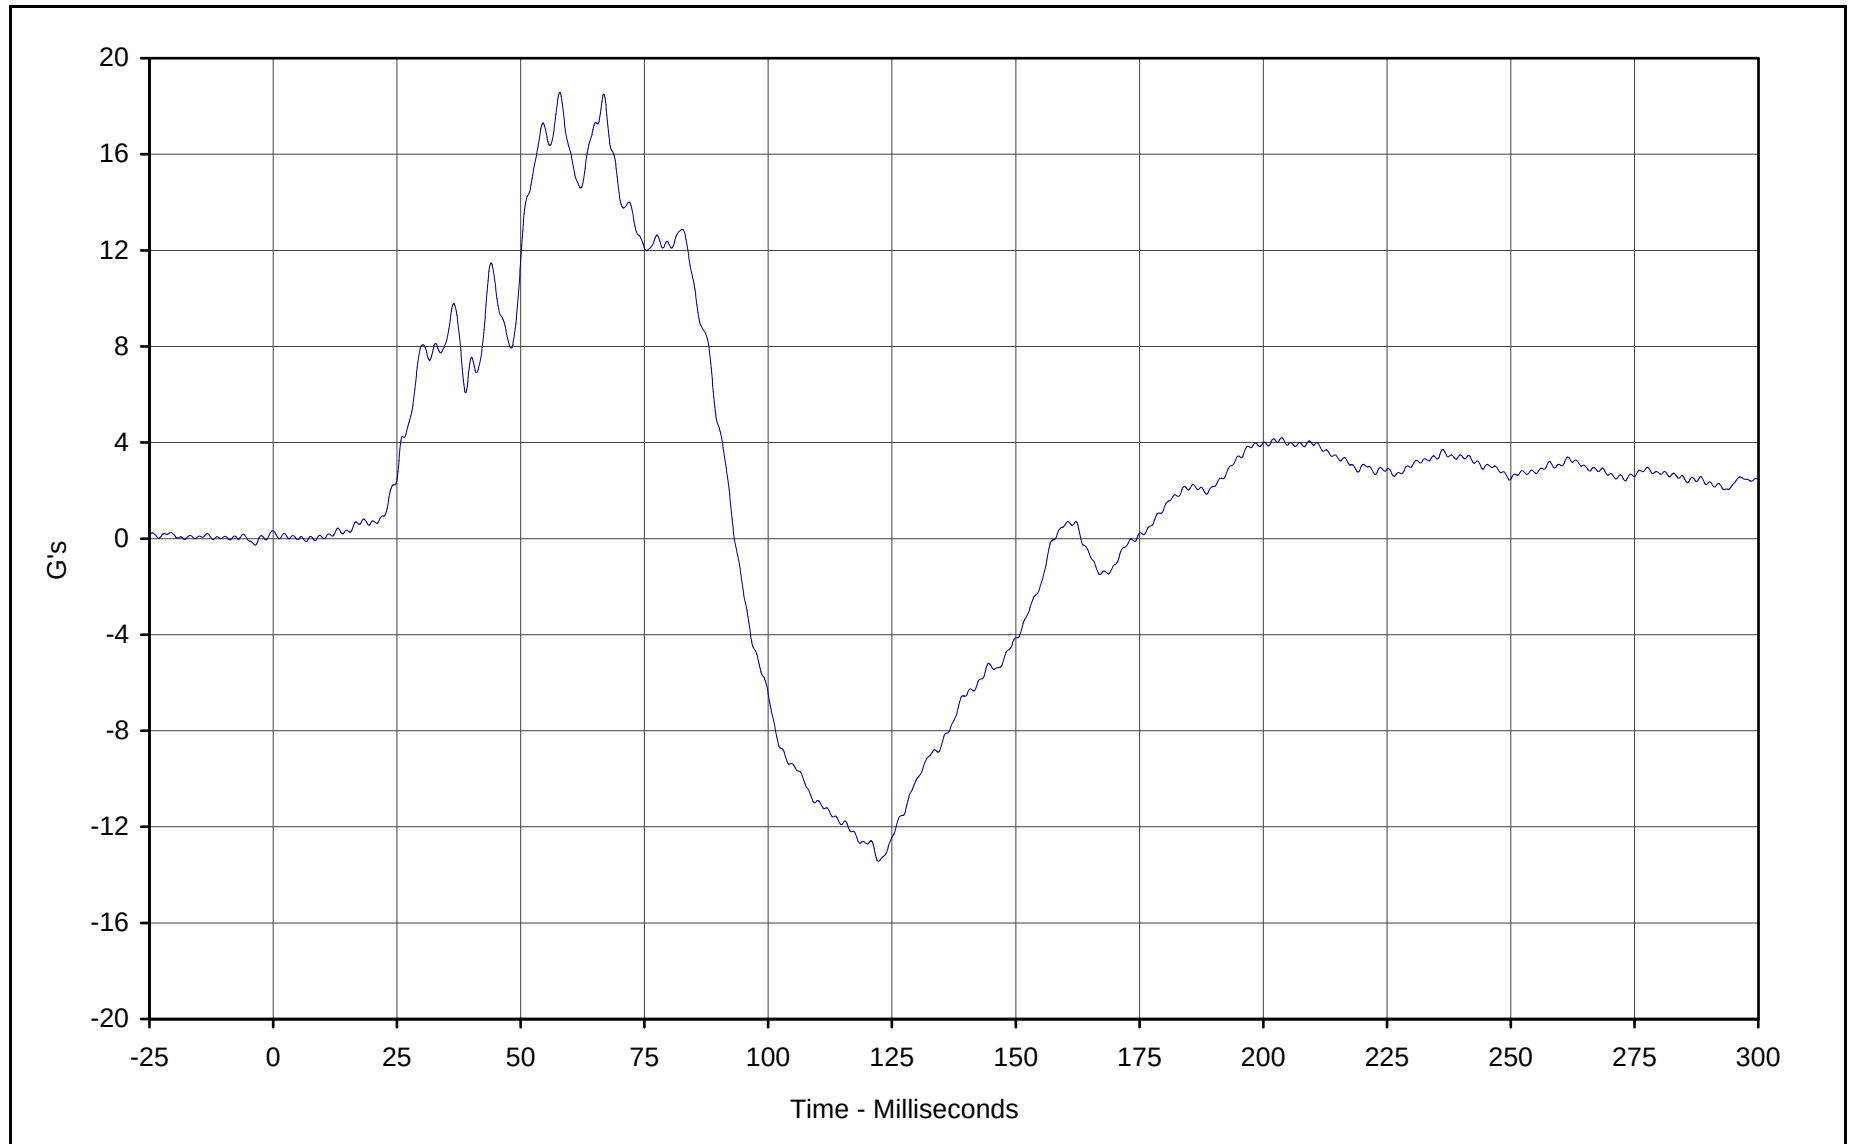


Curve Description: Driver Chest Primary Z
Maximum Value: 18.6 at 57.9 Milliseconds
Minimum Value: -13.4 at 122.2 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: FIL-015

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup




KAR21001-10

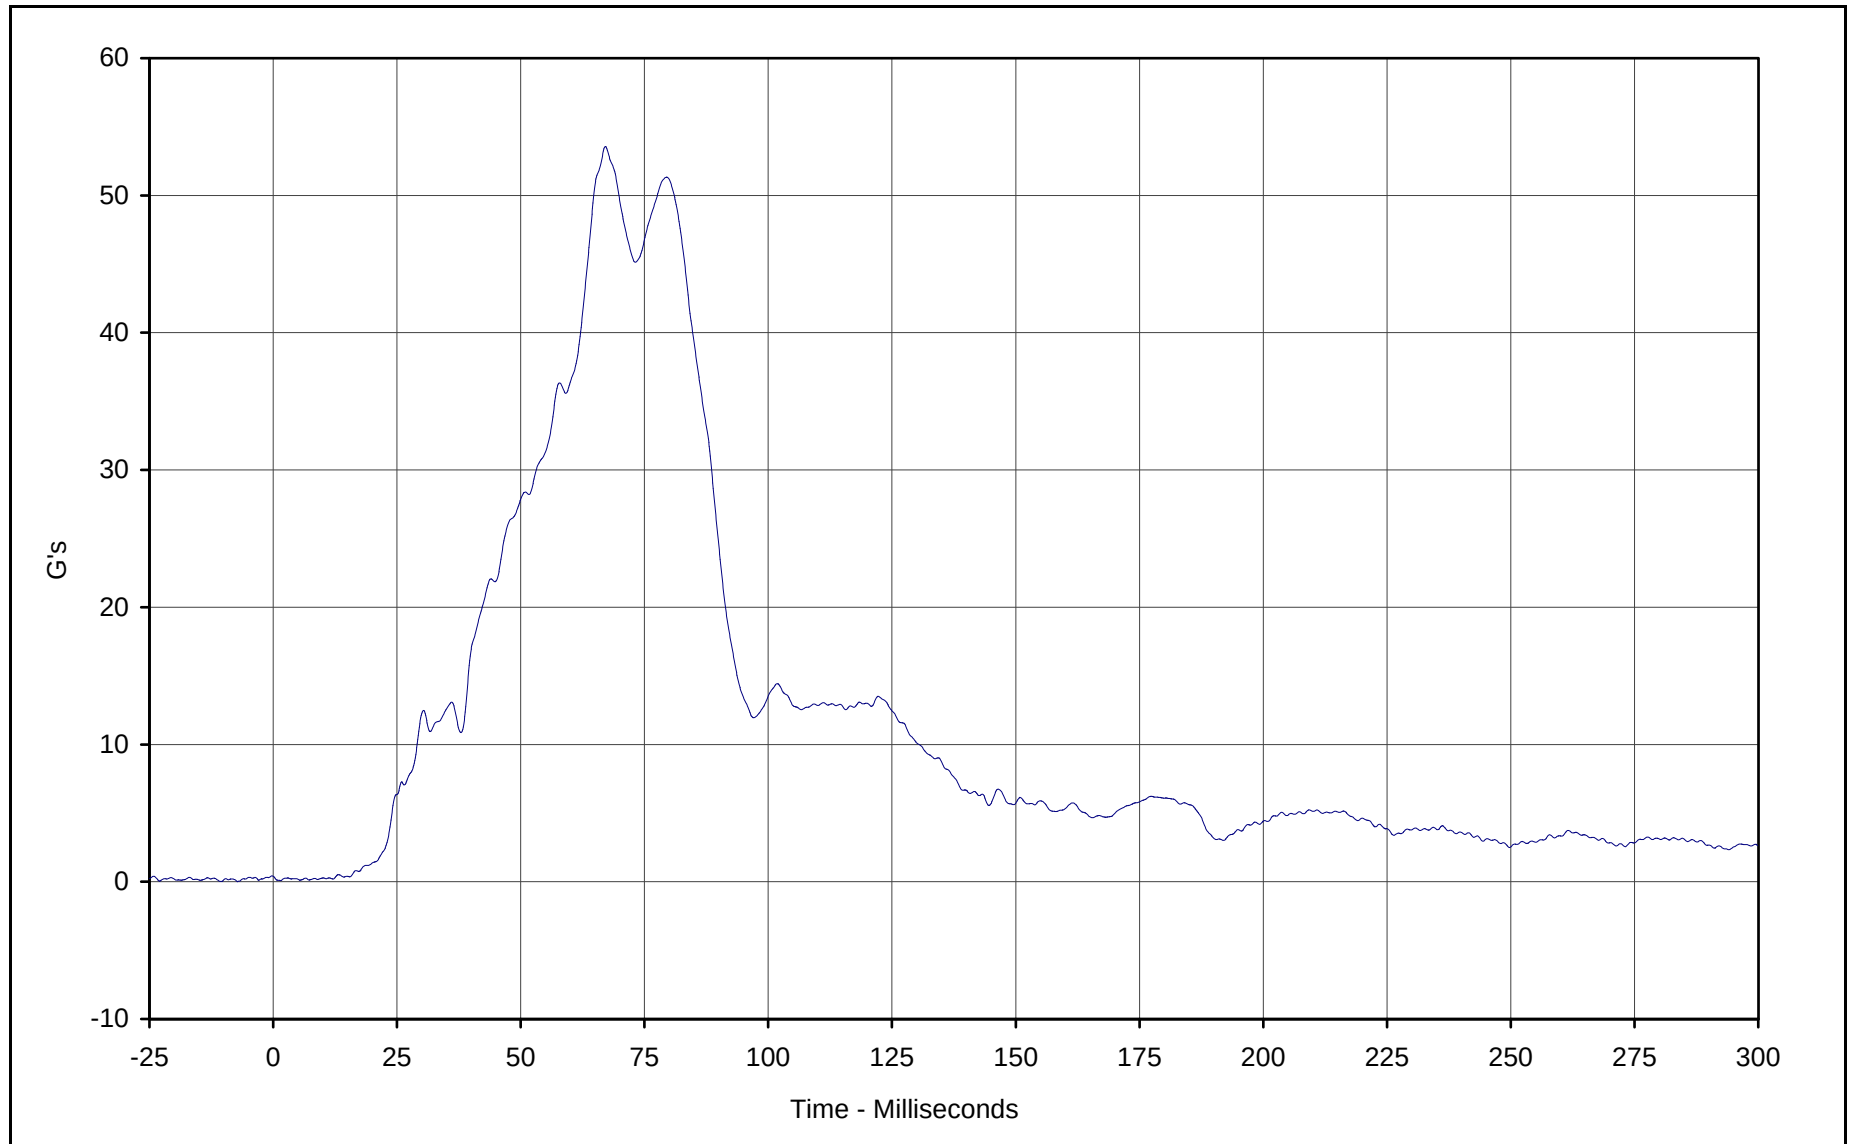

Curve Description: Driver Chest Resultant Primary
Maximum Value: 53.6 at 67.1 Milliseconds
Minimum Value: 0.1 at 1.5 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: RES-013

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



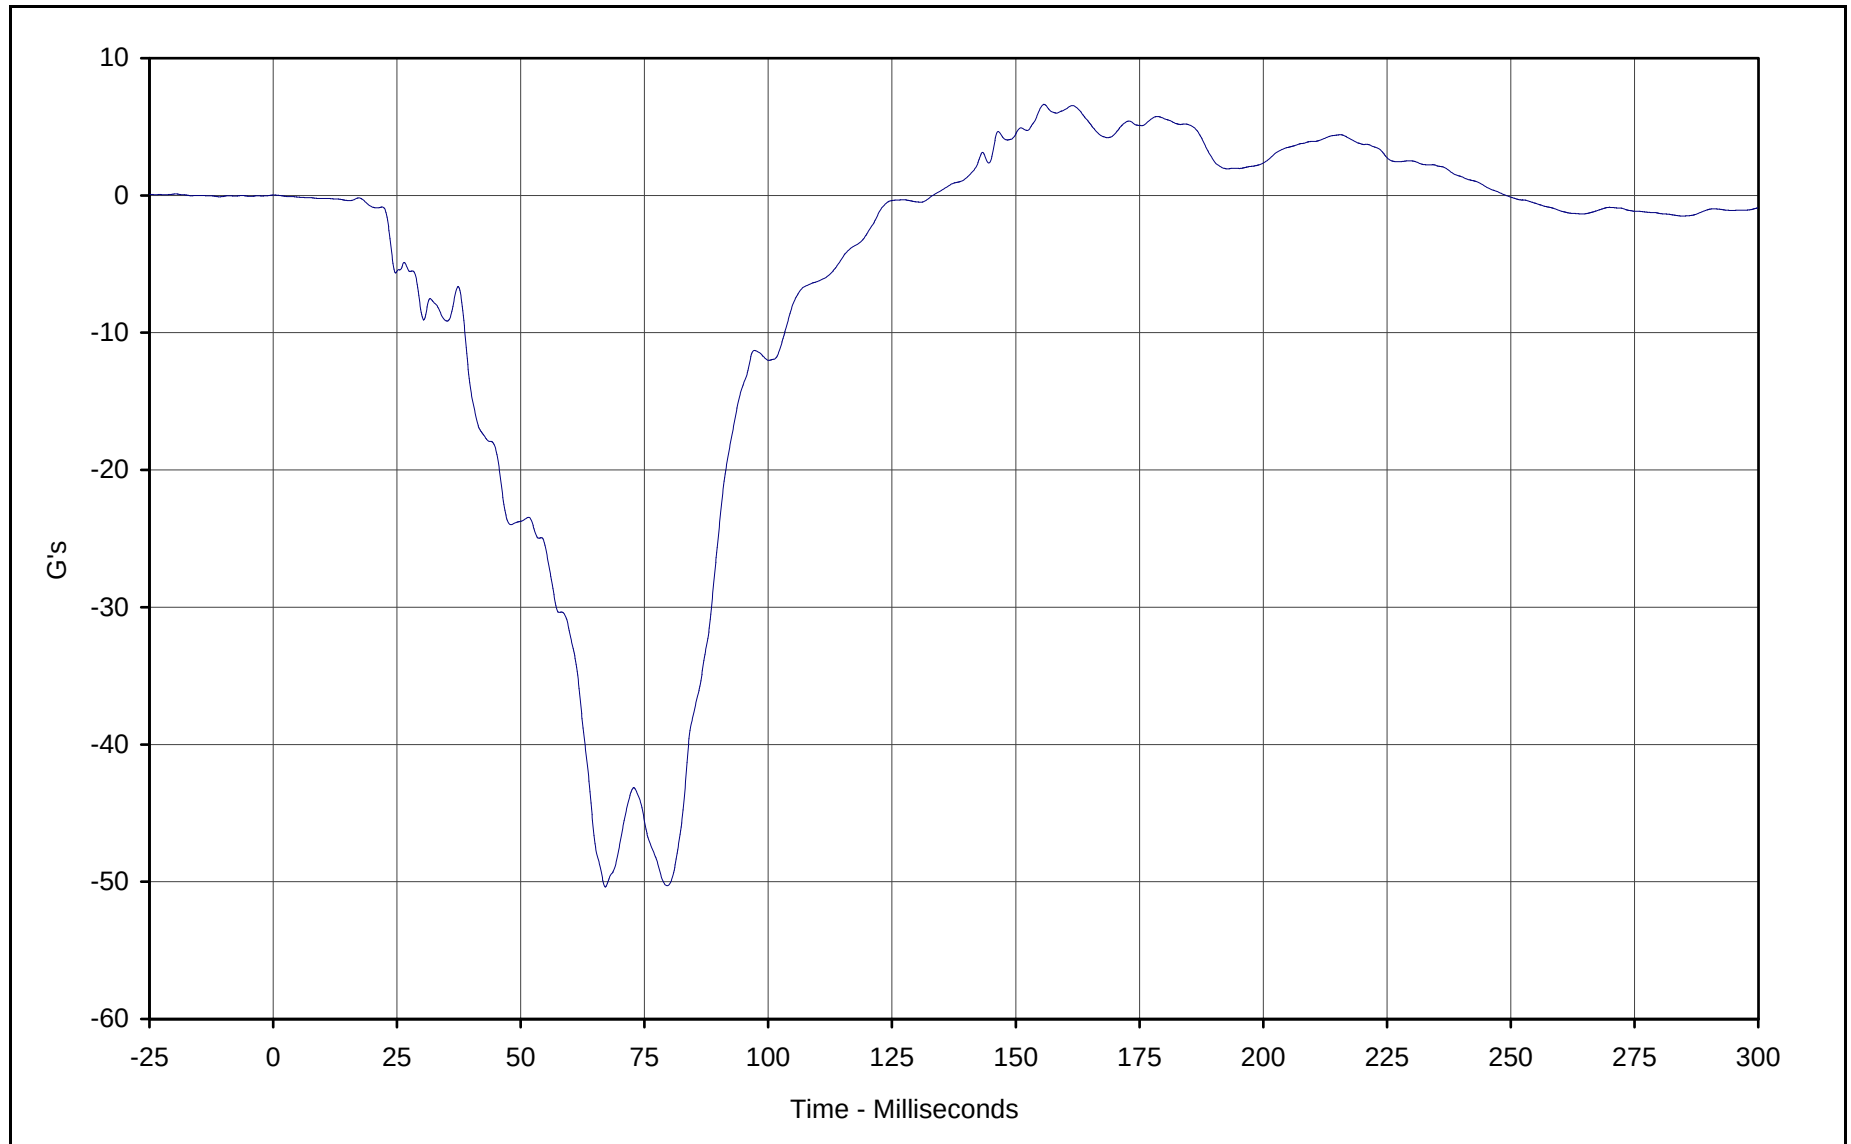


Curve Description: Driver Chest Redundant X
Maximum Value: 6.6 at 155.7 Milliseconds
Minimum Value: -50.4 at 67.1 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: FIL-016

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-28

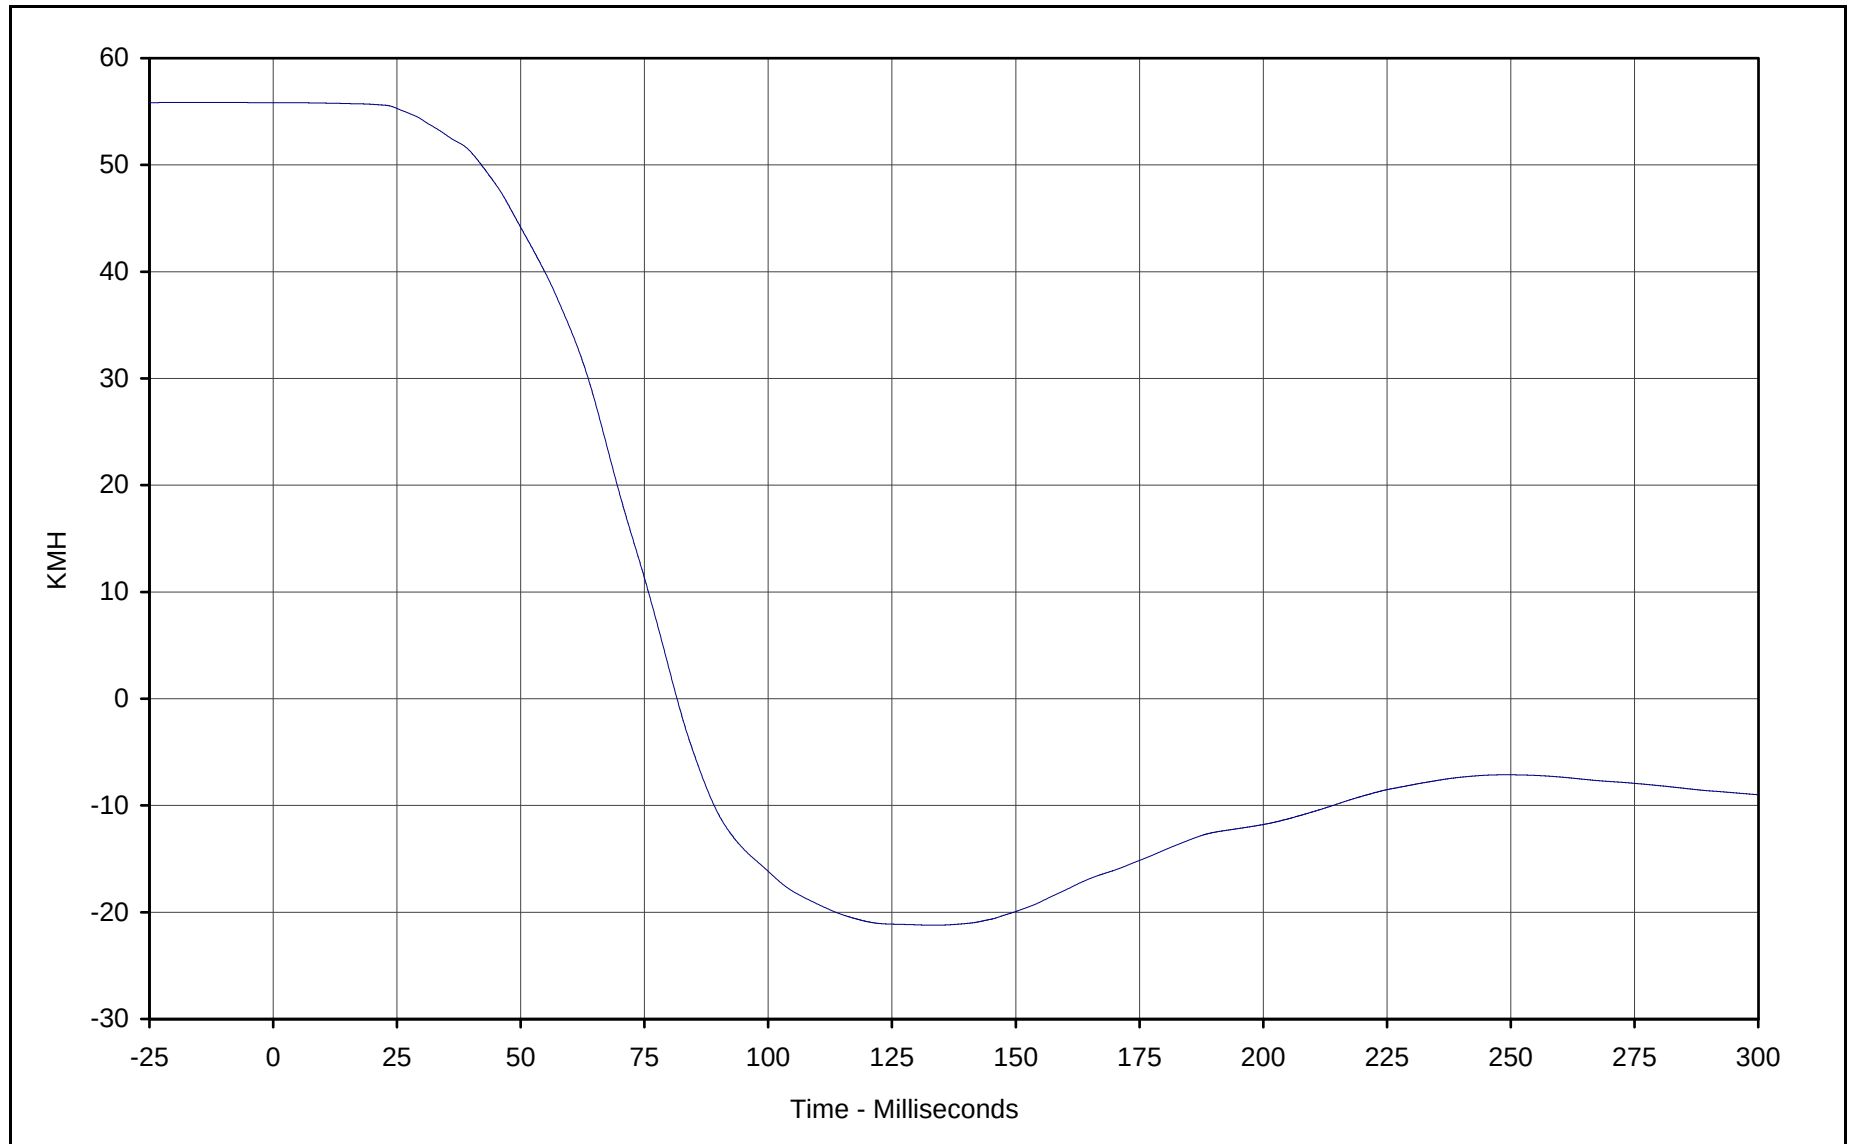


Curve Description: Driver Chest Redundant X Velocity
Maximum Value: 55.8 at 1.3 Milliseconds
Minimum Value: -21.2 at 133.2 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: IN1-016

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

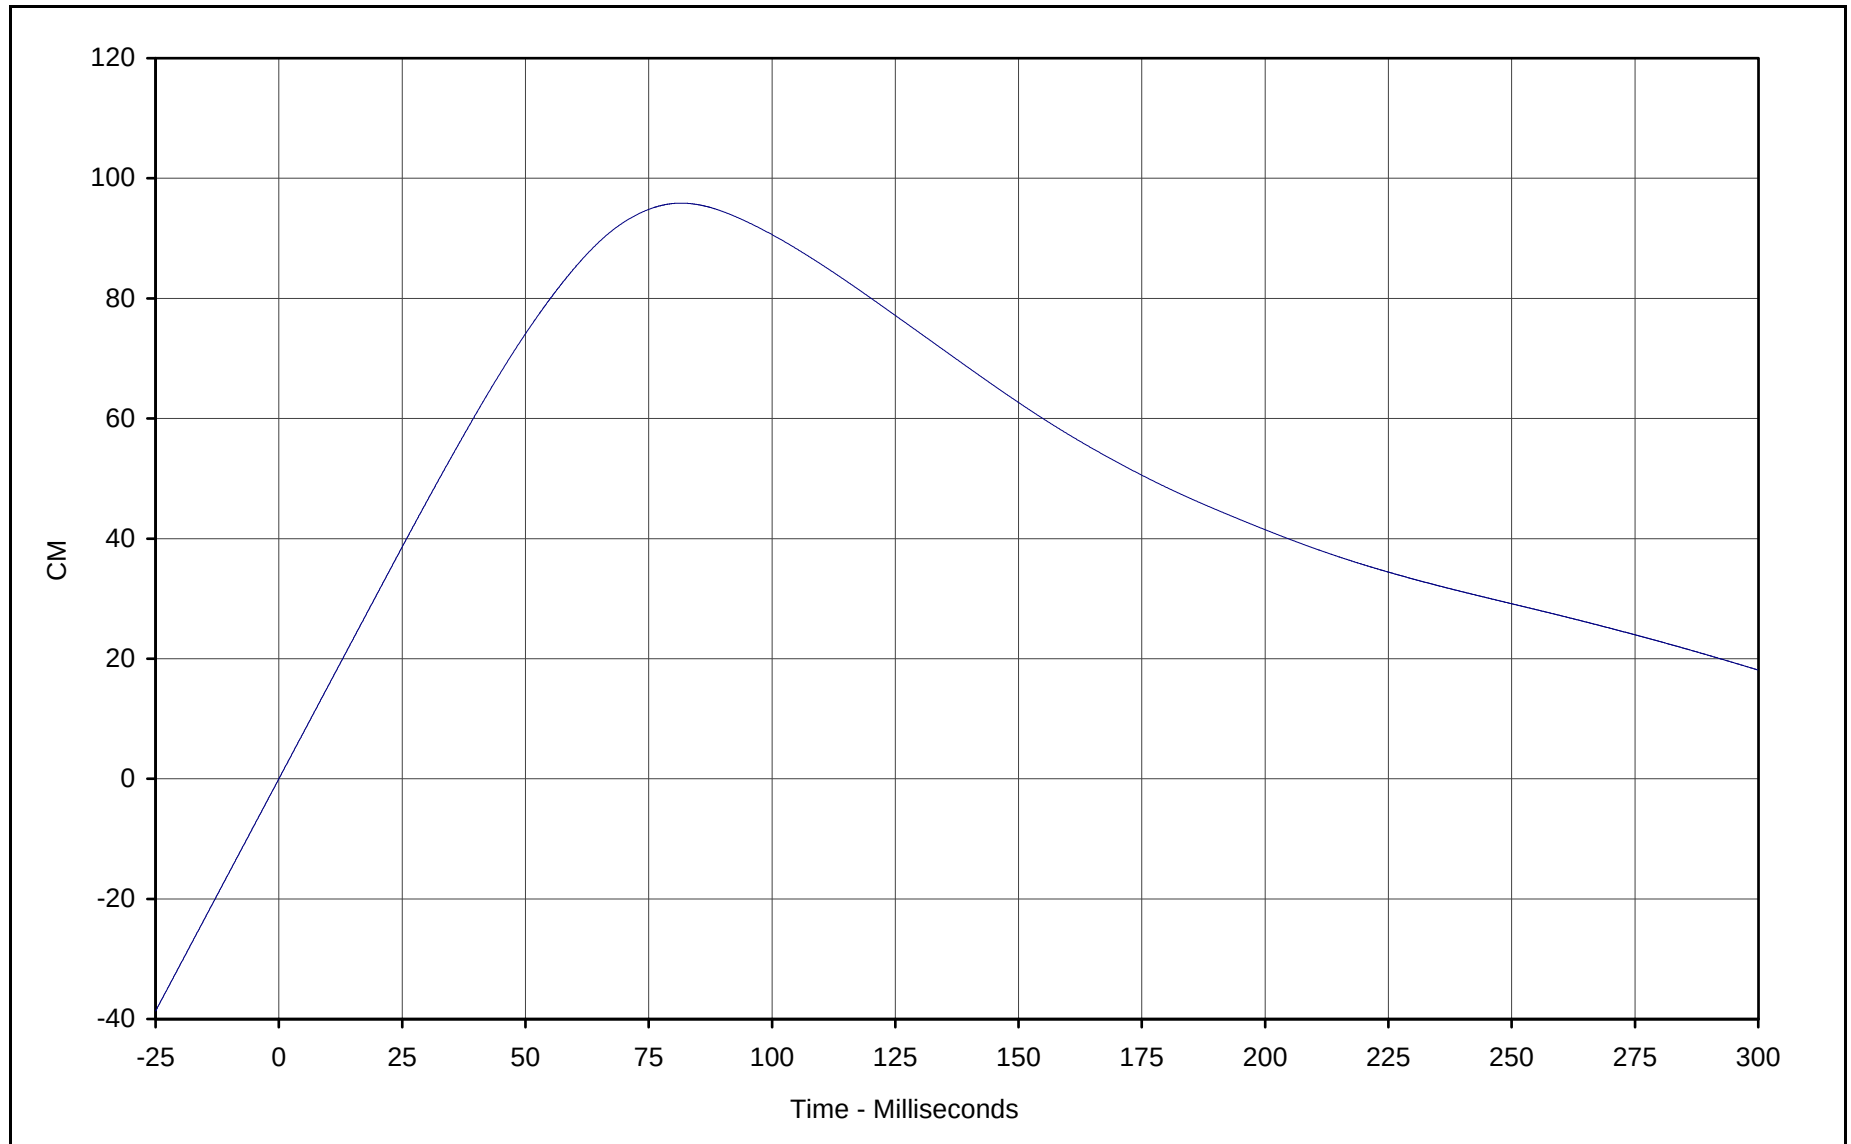


Curve Description: Driver Chest Redundant X Displ.
Maximum Value: 95.9 at 81.6 Milliseconds
Minimum Value: 0.0 at 0.0 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: IN2-016

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-30

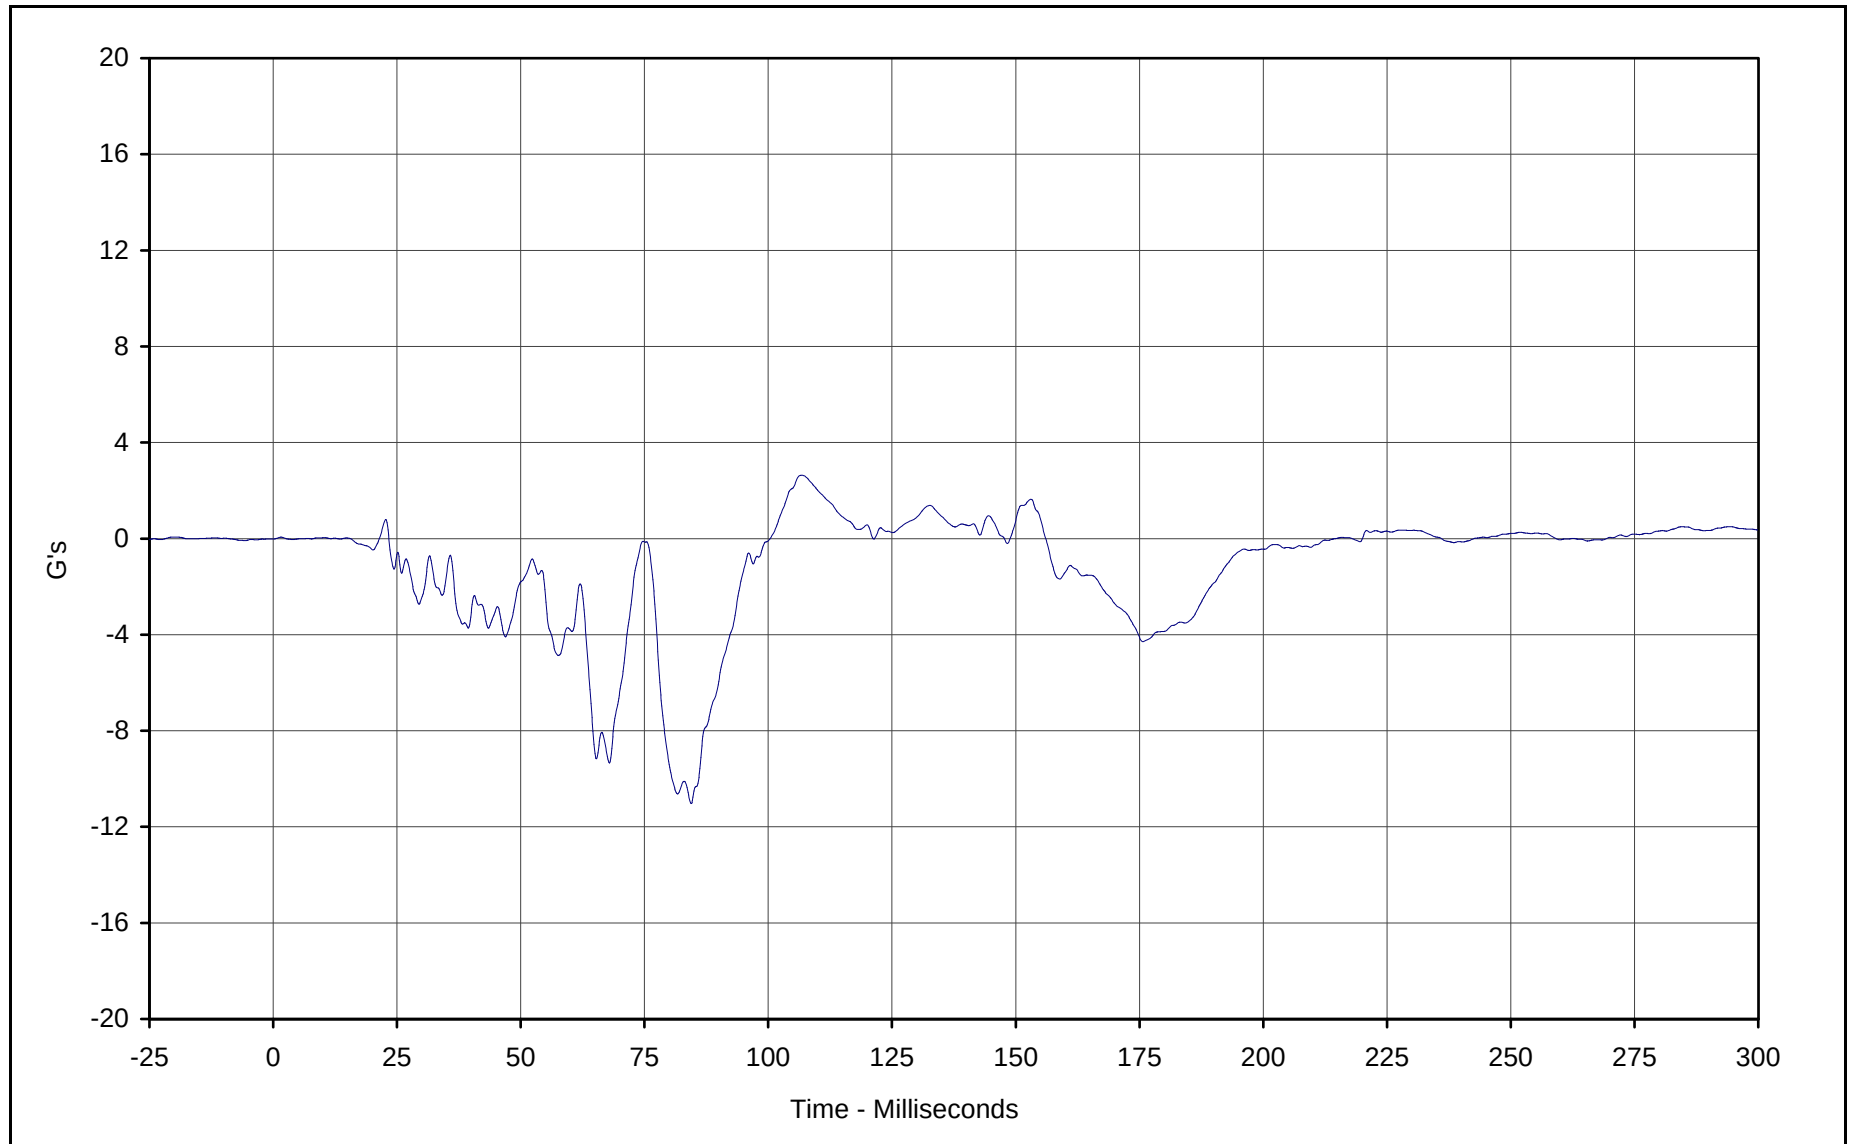


Curve Description: Driver Chest Redundant Y
Maximum Value: 2.6 at 106.8 Milliseconds
Minimum Value: -11.0 at 84.4 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: FIL-017

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-31

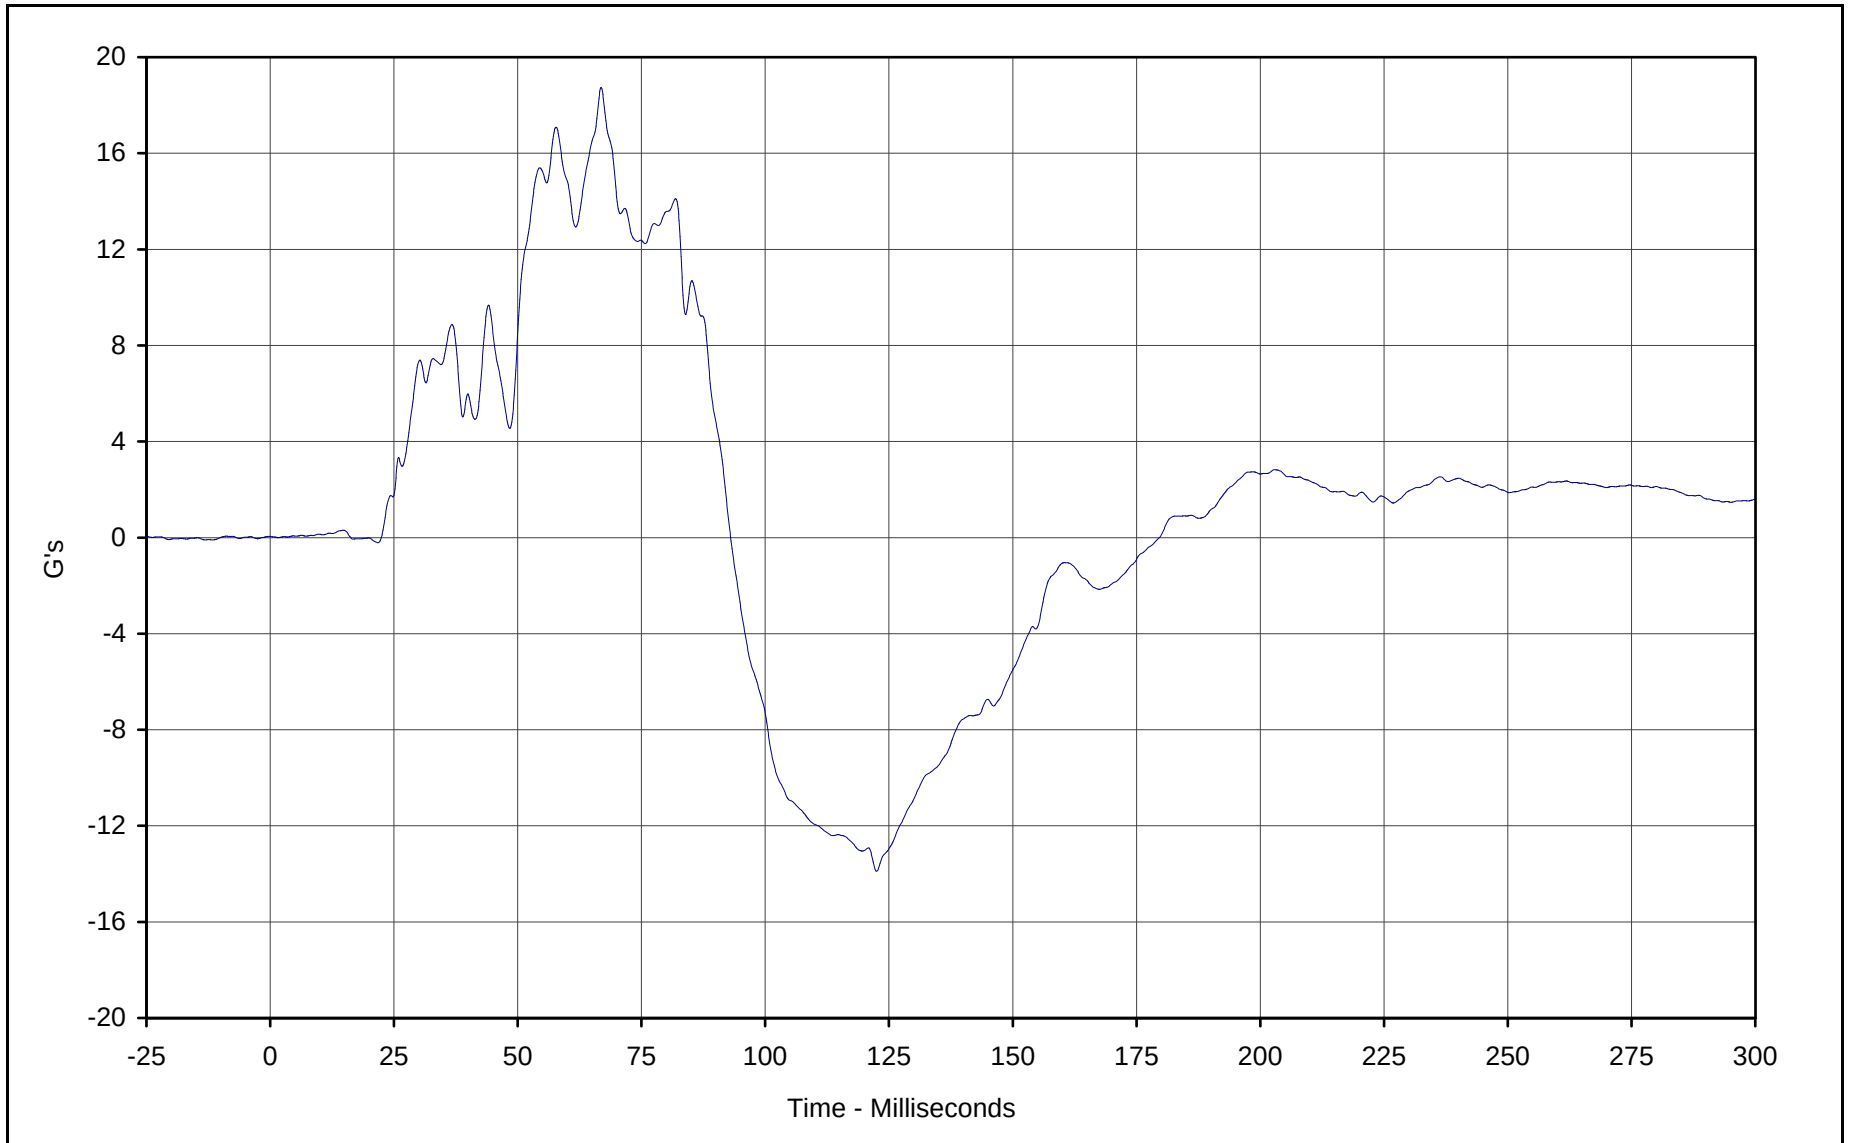


Curve Description: Driver Chest Redundant Z
Maximum Value: 18.7 at 66.8 Milliseconds
Minimum Value: -13.9 at 122.5 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: FIL-018

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-32

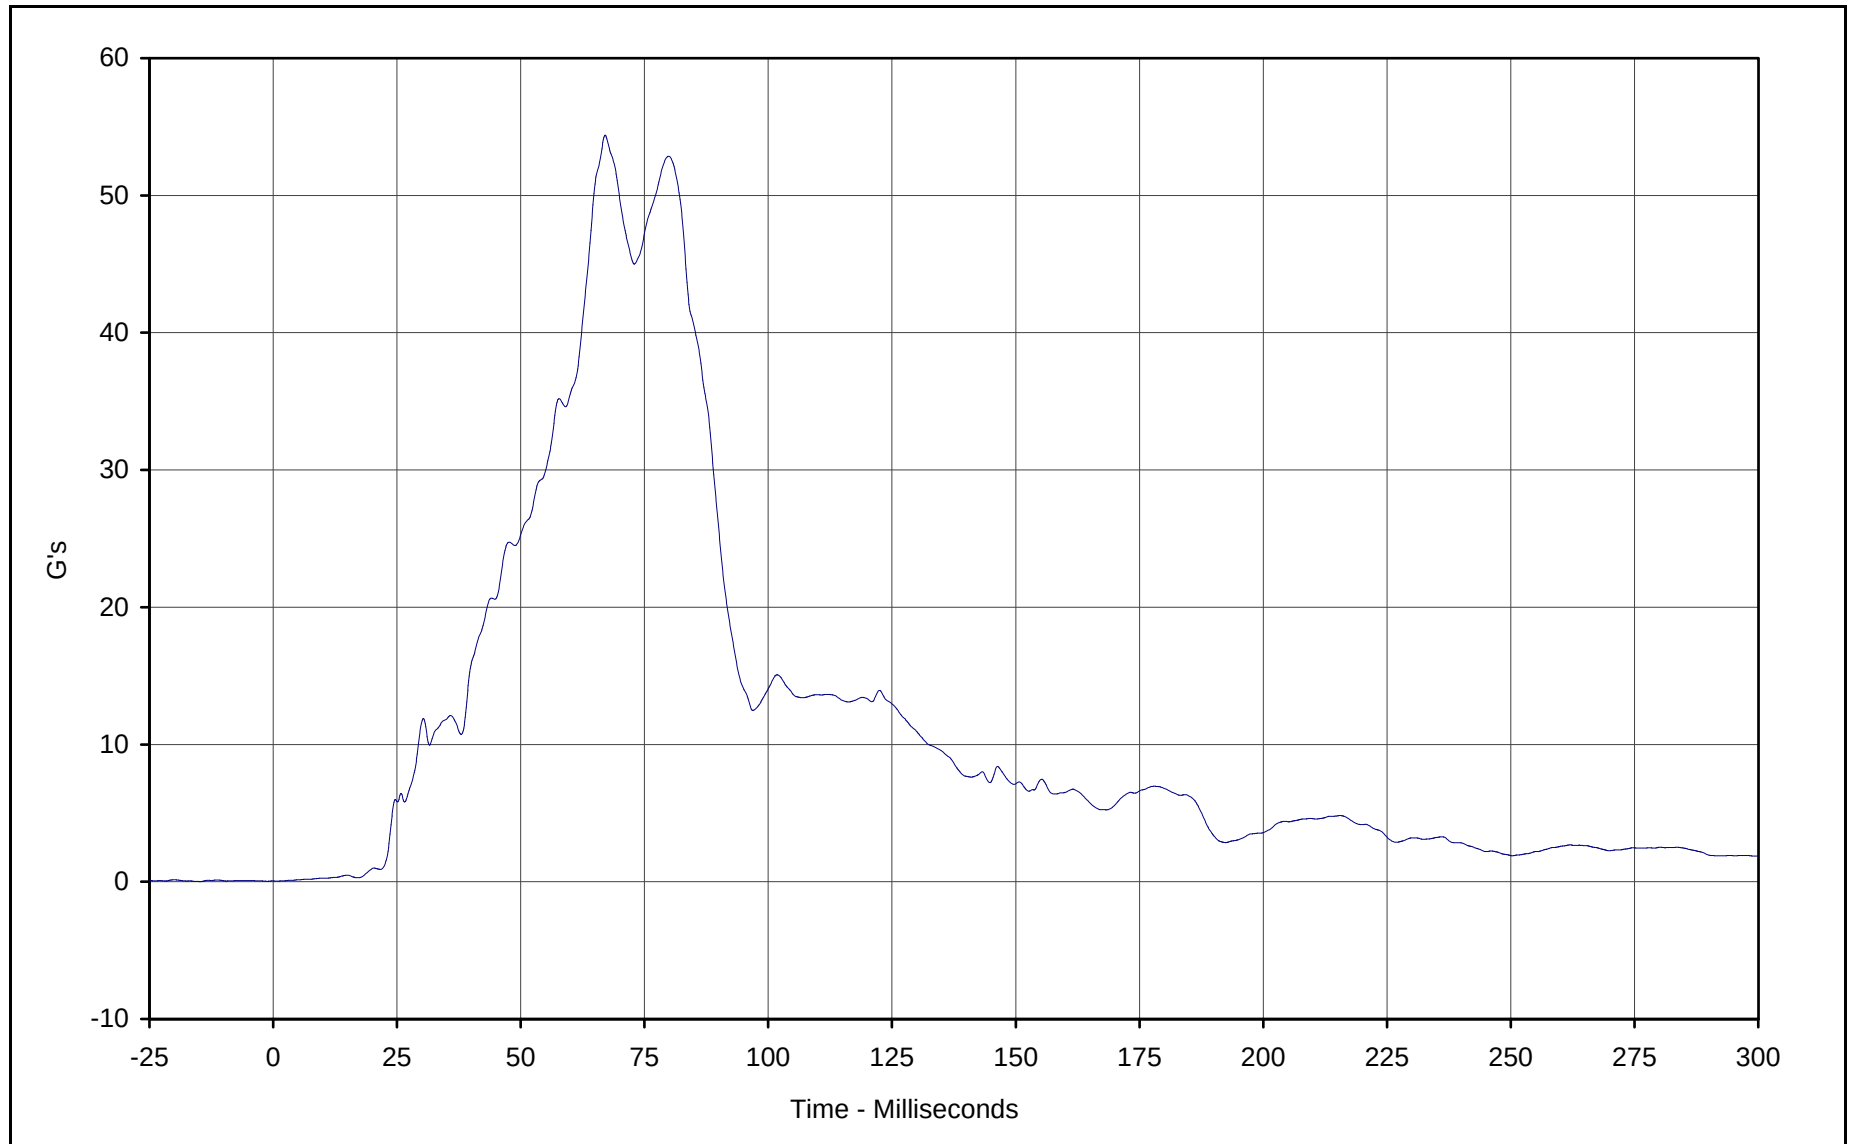


Curve Description: Driver Chest Resultant Redundant
Maximum Value: 54.4 at 67.0 Milliseconds
Minimum Value: 0.0 at 0.8 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: RES-016

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup




KAR21001-10

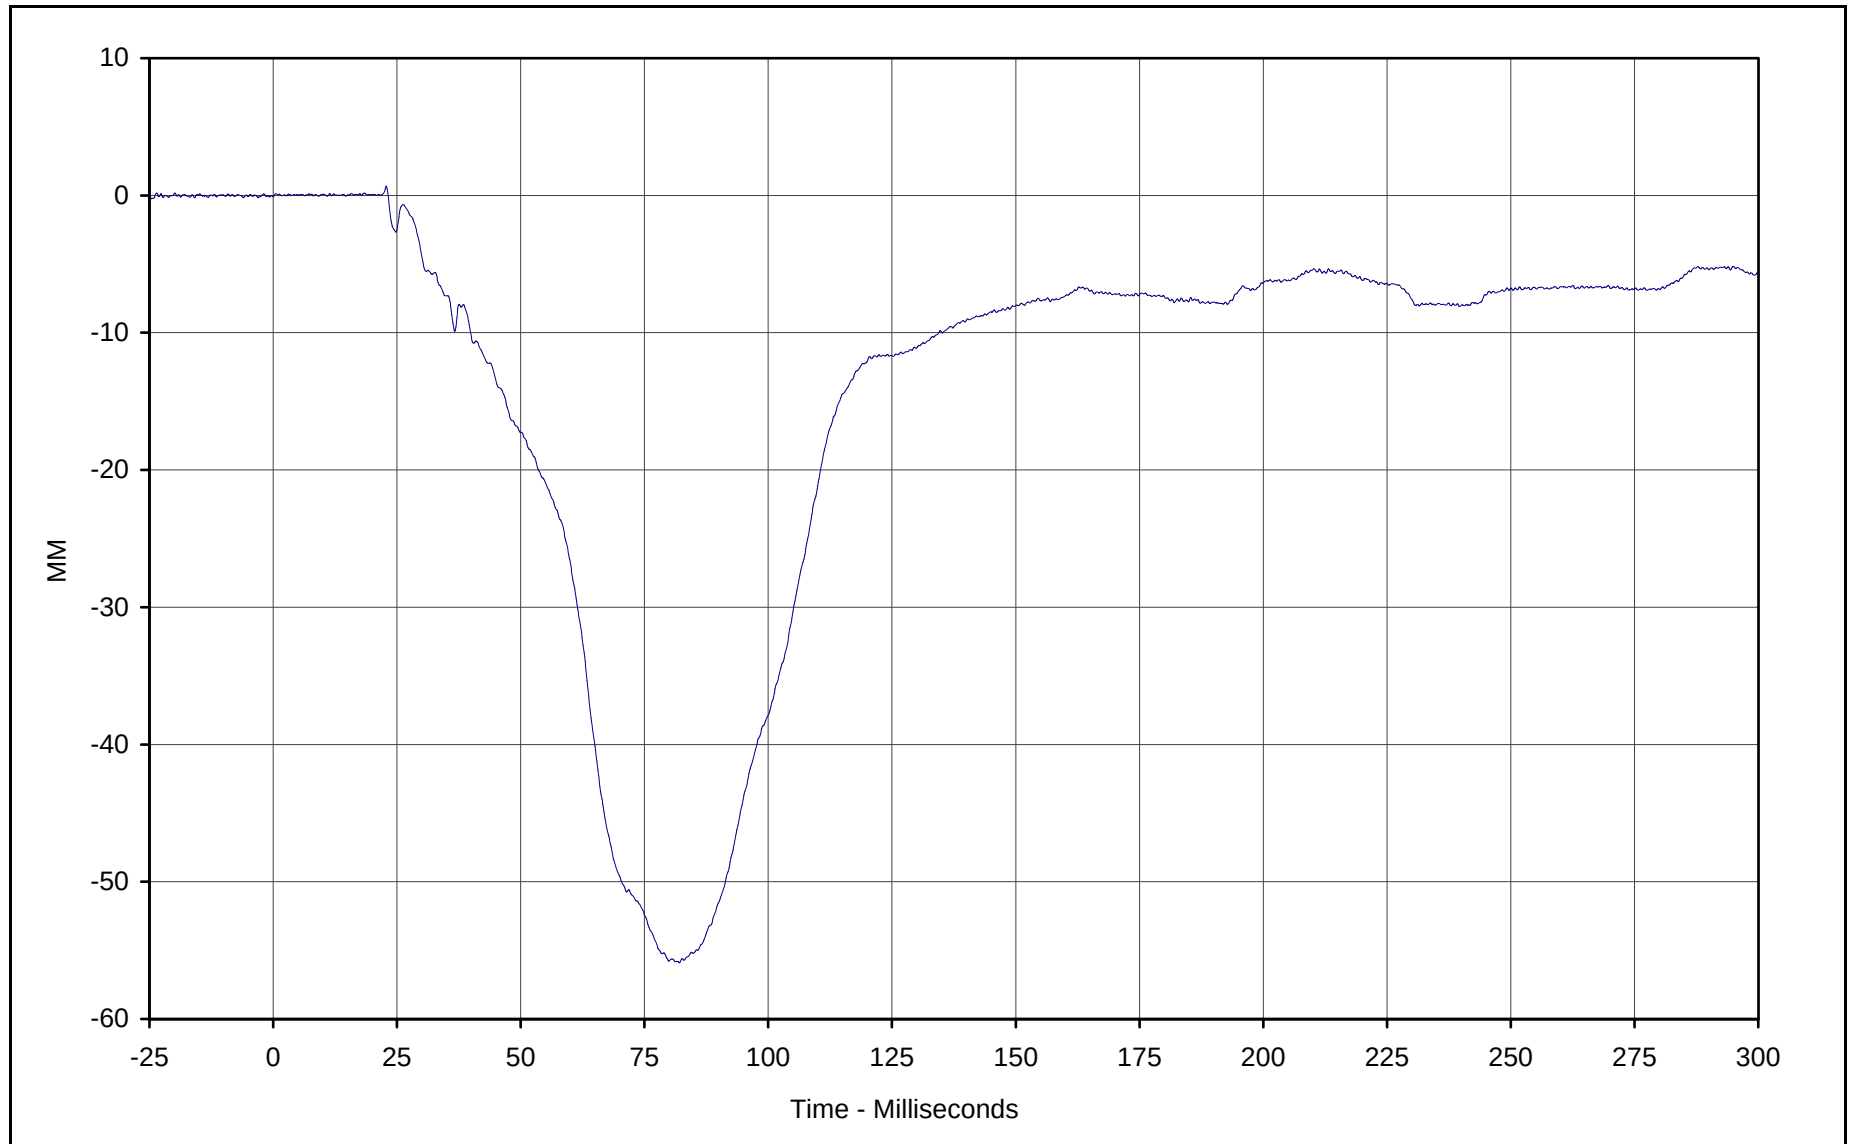

Curve Description: Driver Chest Displacement X
Maximum Value: 0.7 at 22.8 Milliseconds
Minimum Value: -55.9 at 82.0 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: FIL-019

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



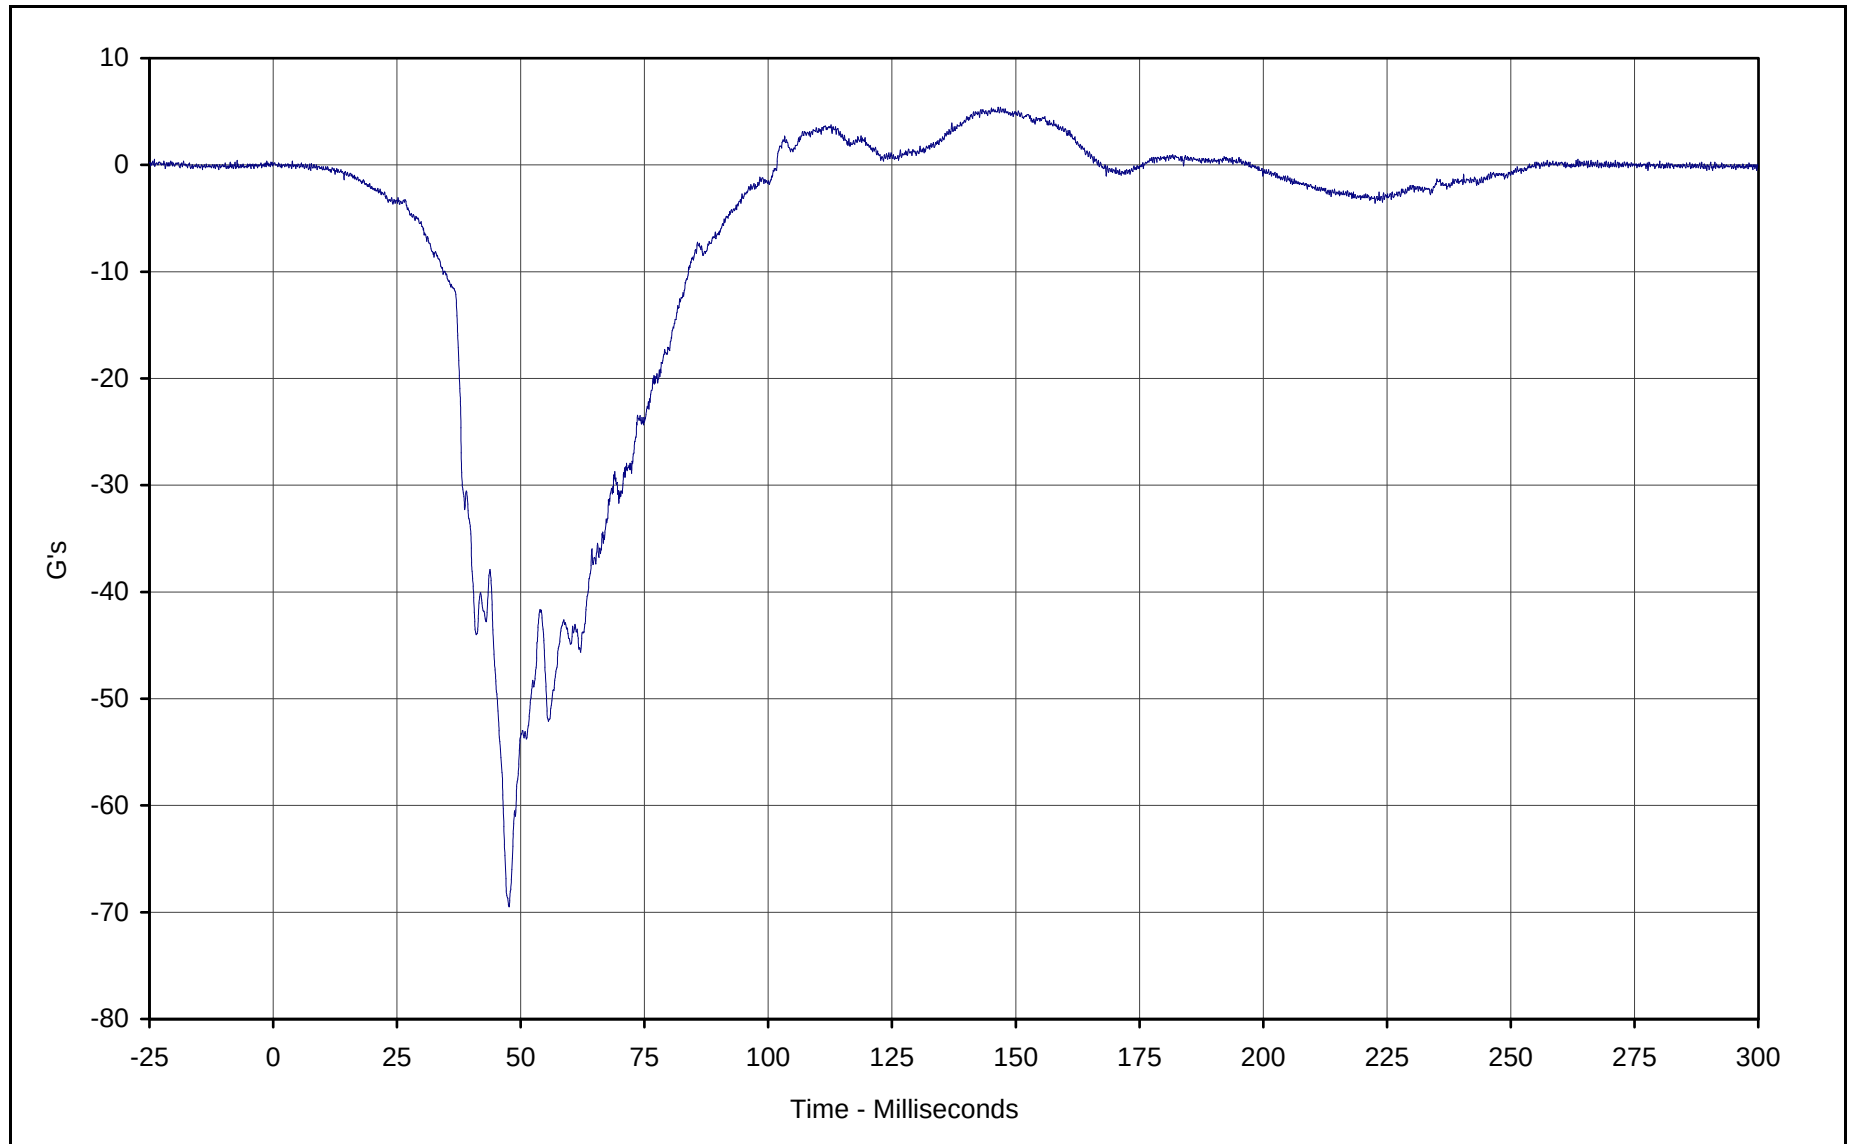

Curve Description: Driver Pelvis X

Maximum Value: 5.4 at 146.4 Milliseconds

Minimum Value: -69.5 at 47.6 Milliseconds

SAE Filter Class: 1000

Date of Test: 02/13/01


Curve Number: FIL-020

Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-35

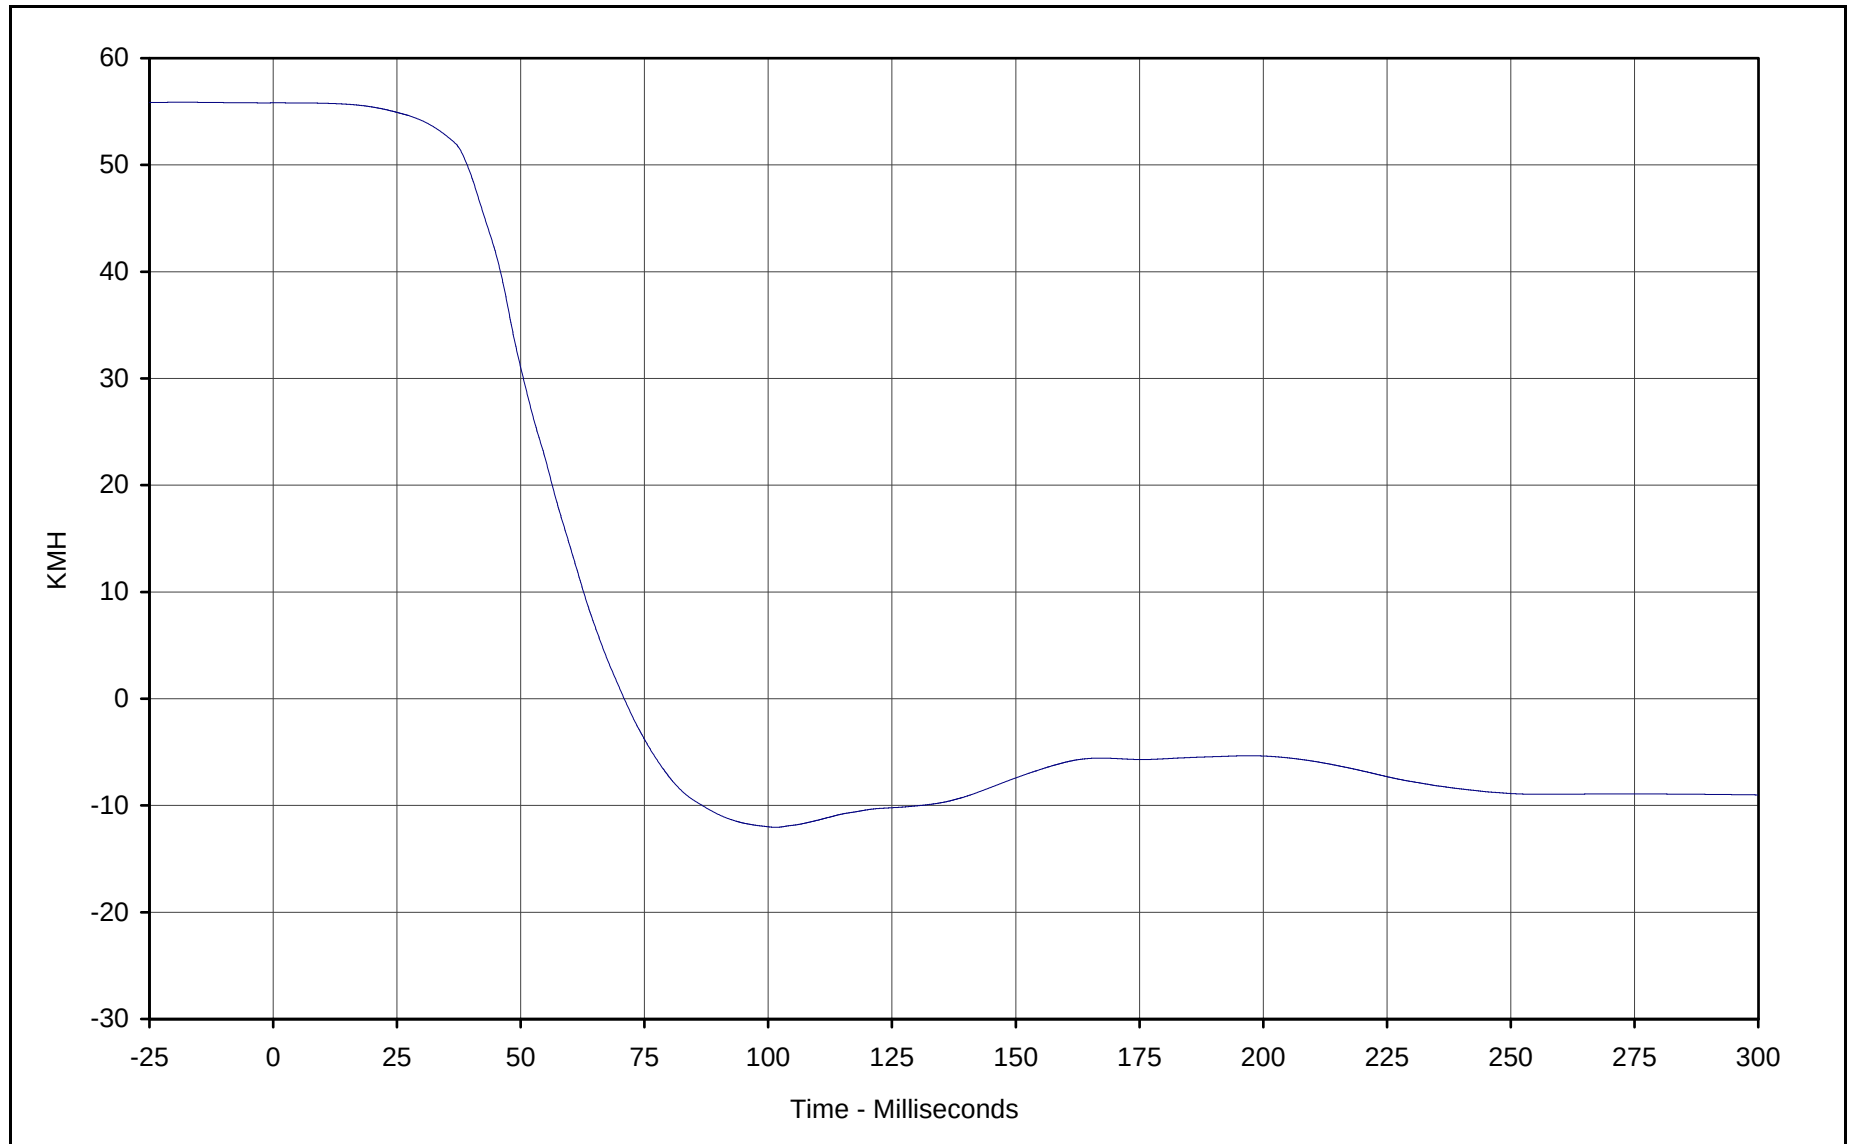


Curve Description: Driver Pelvis X Velocity
Maximum Value: 55.8 at 0.8 Milliseconds
Minimum Value: -12.1 at 101.5 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: IN1-020

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup




KAR21001-10

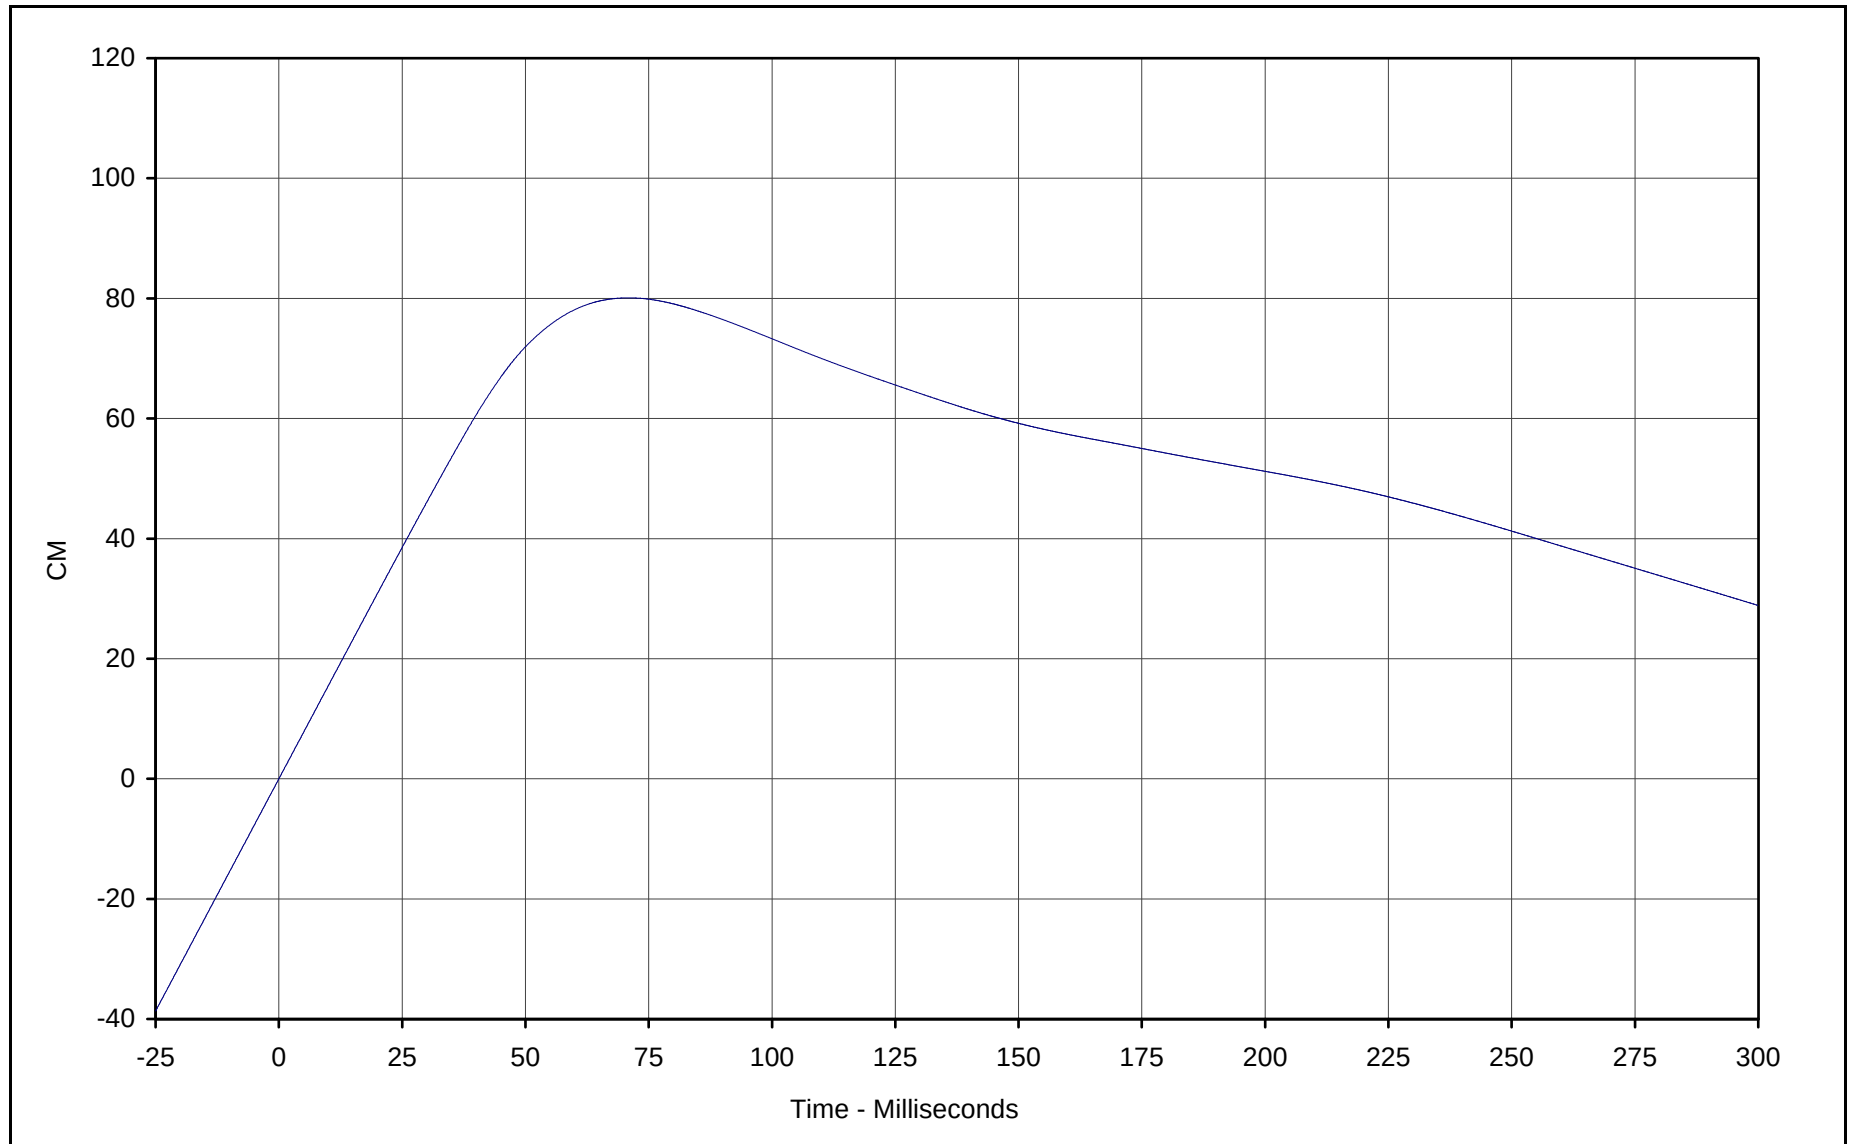

Curve Description: Driver Pelvis X Displ.
Maximum Value: 80.1 at 70.9 Milliseconds
Minimum Value: 0.0 at 0.0 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: IN2-020

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup




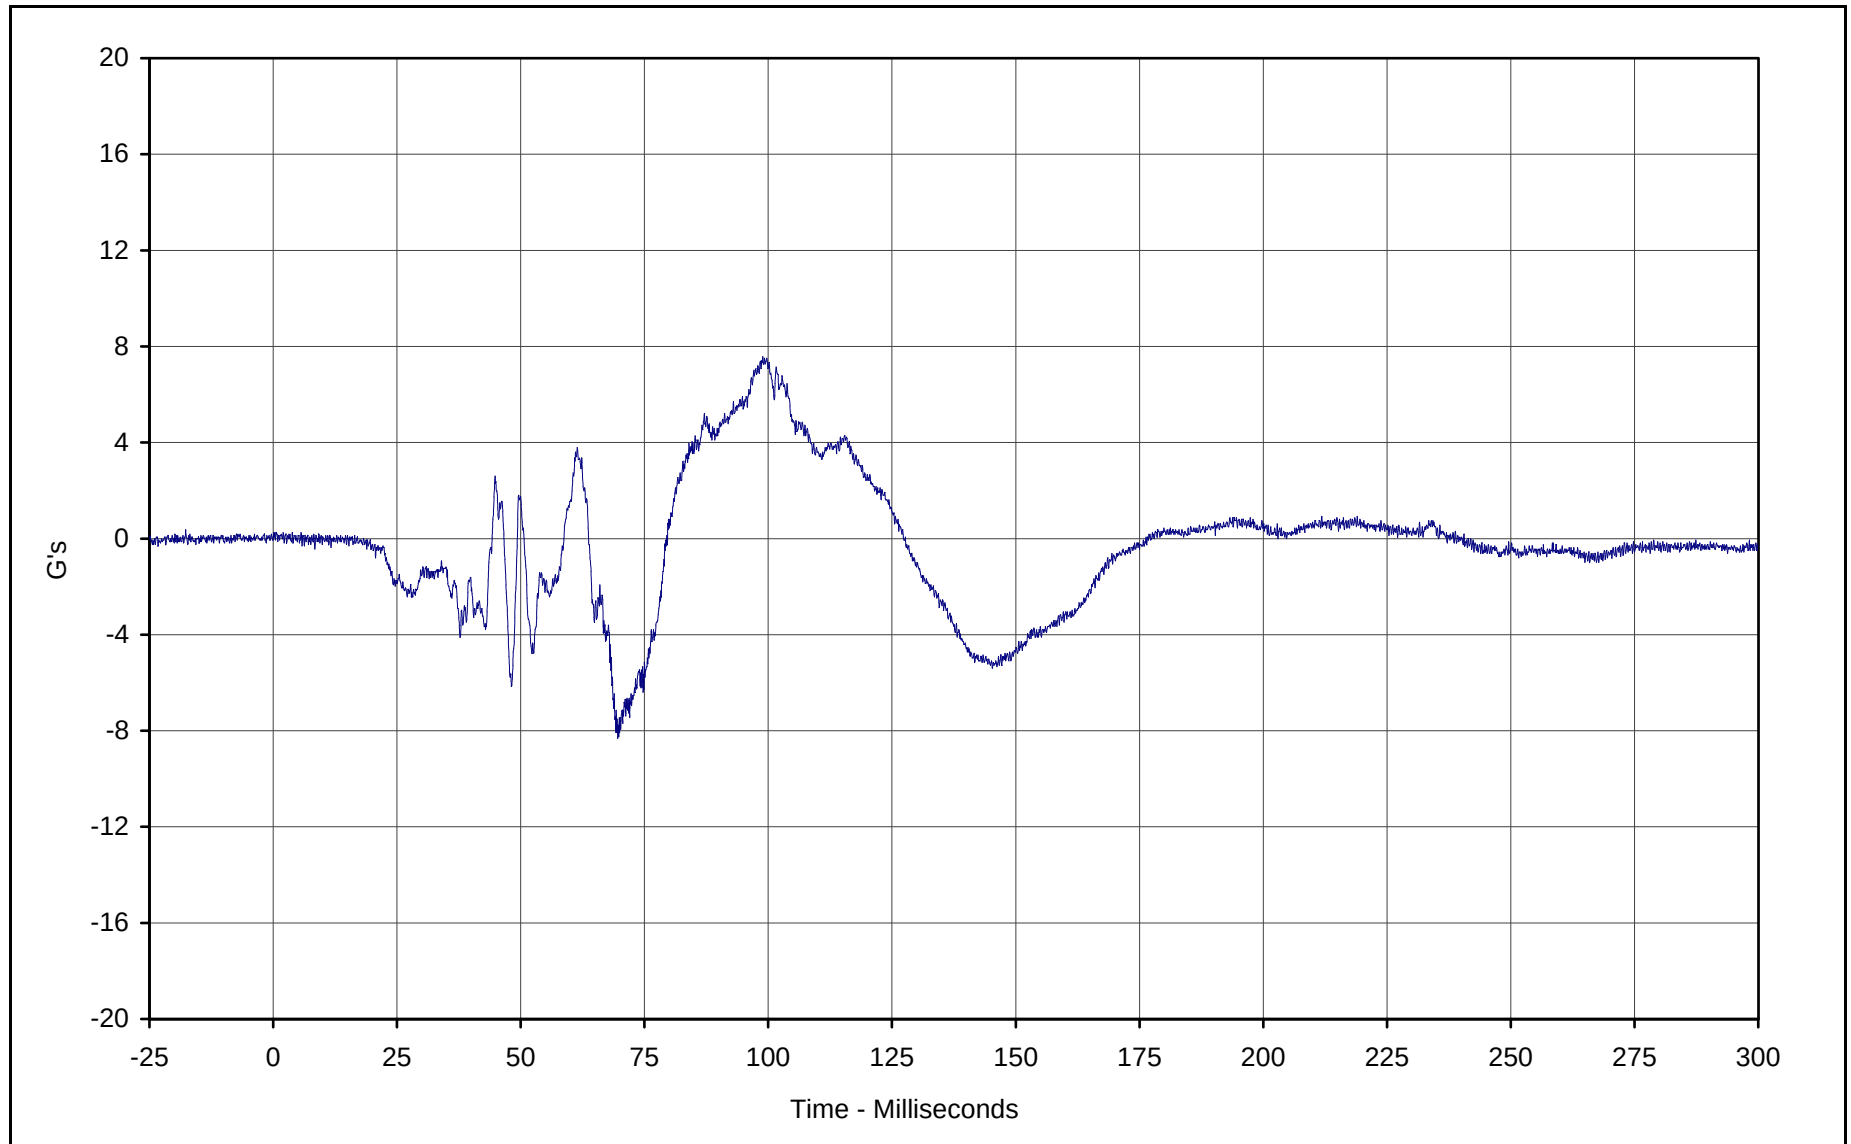

Curve Description: Driver Pelvis Y
Maximum Value: 7.6 at 98.9 Milliseconds
Minimum Value: -8.3 at 69.6 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: FIL-021

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup




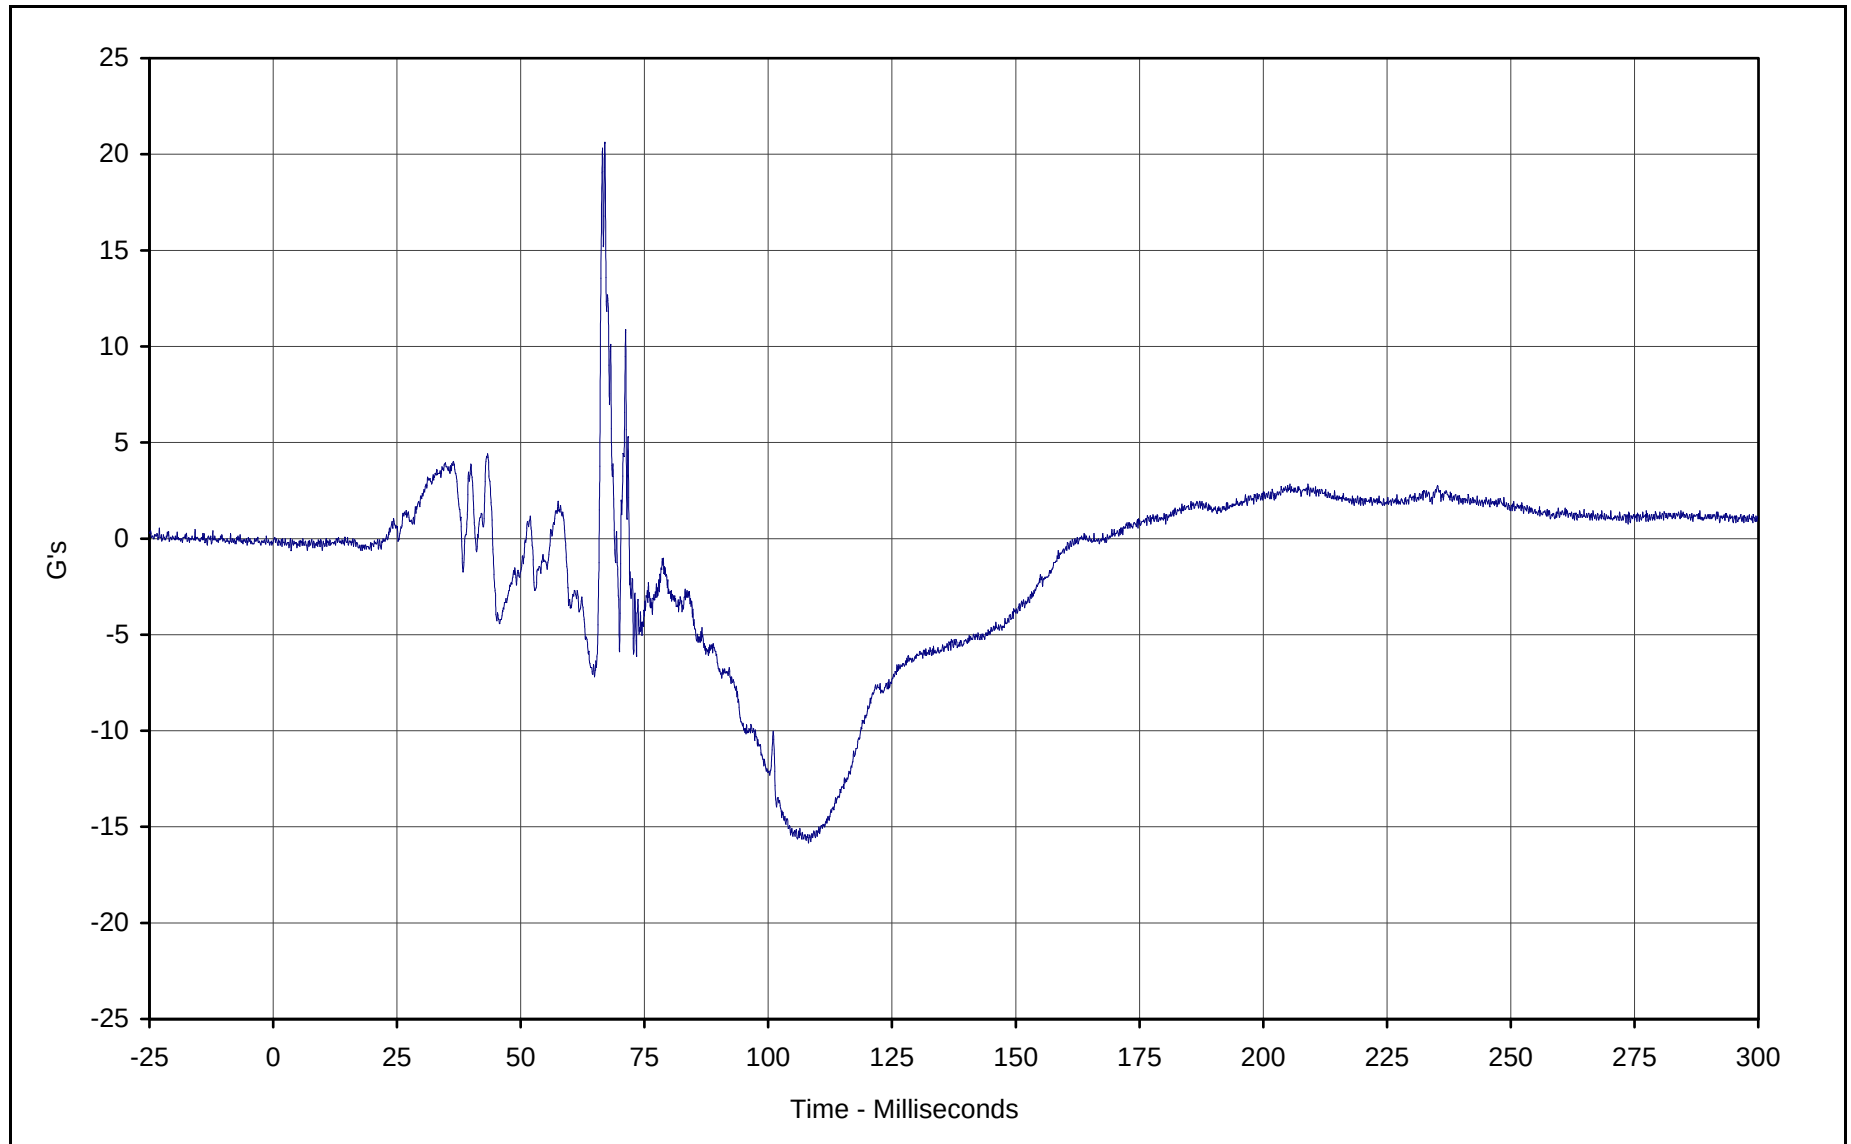

Curve Description: Driver Pelvis Z
Maximum Value: 20.6 at 67.0 Milliseconds
Minimum Value: -15.8 at 108.1 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: FIL-022

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



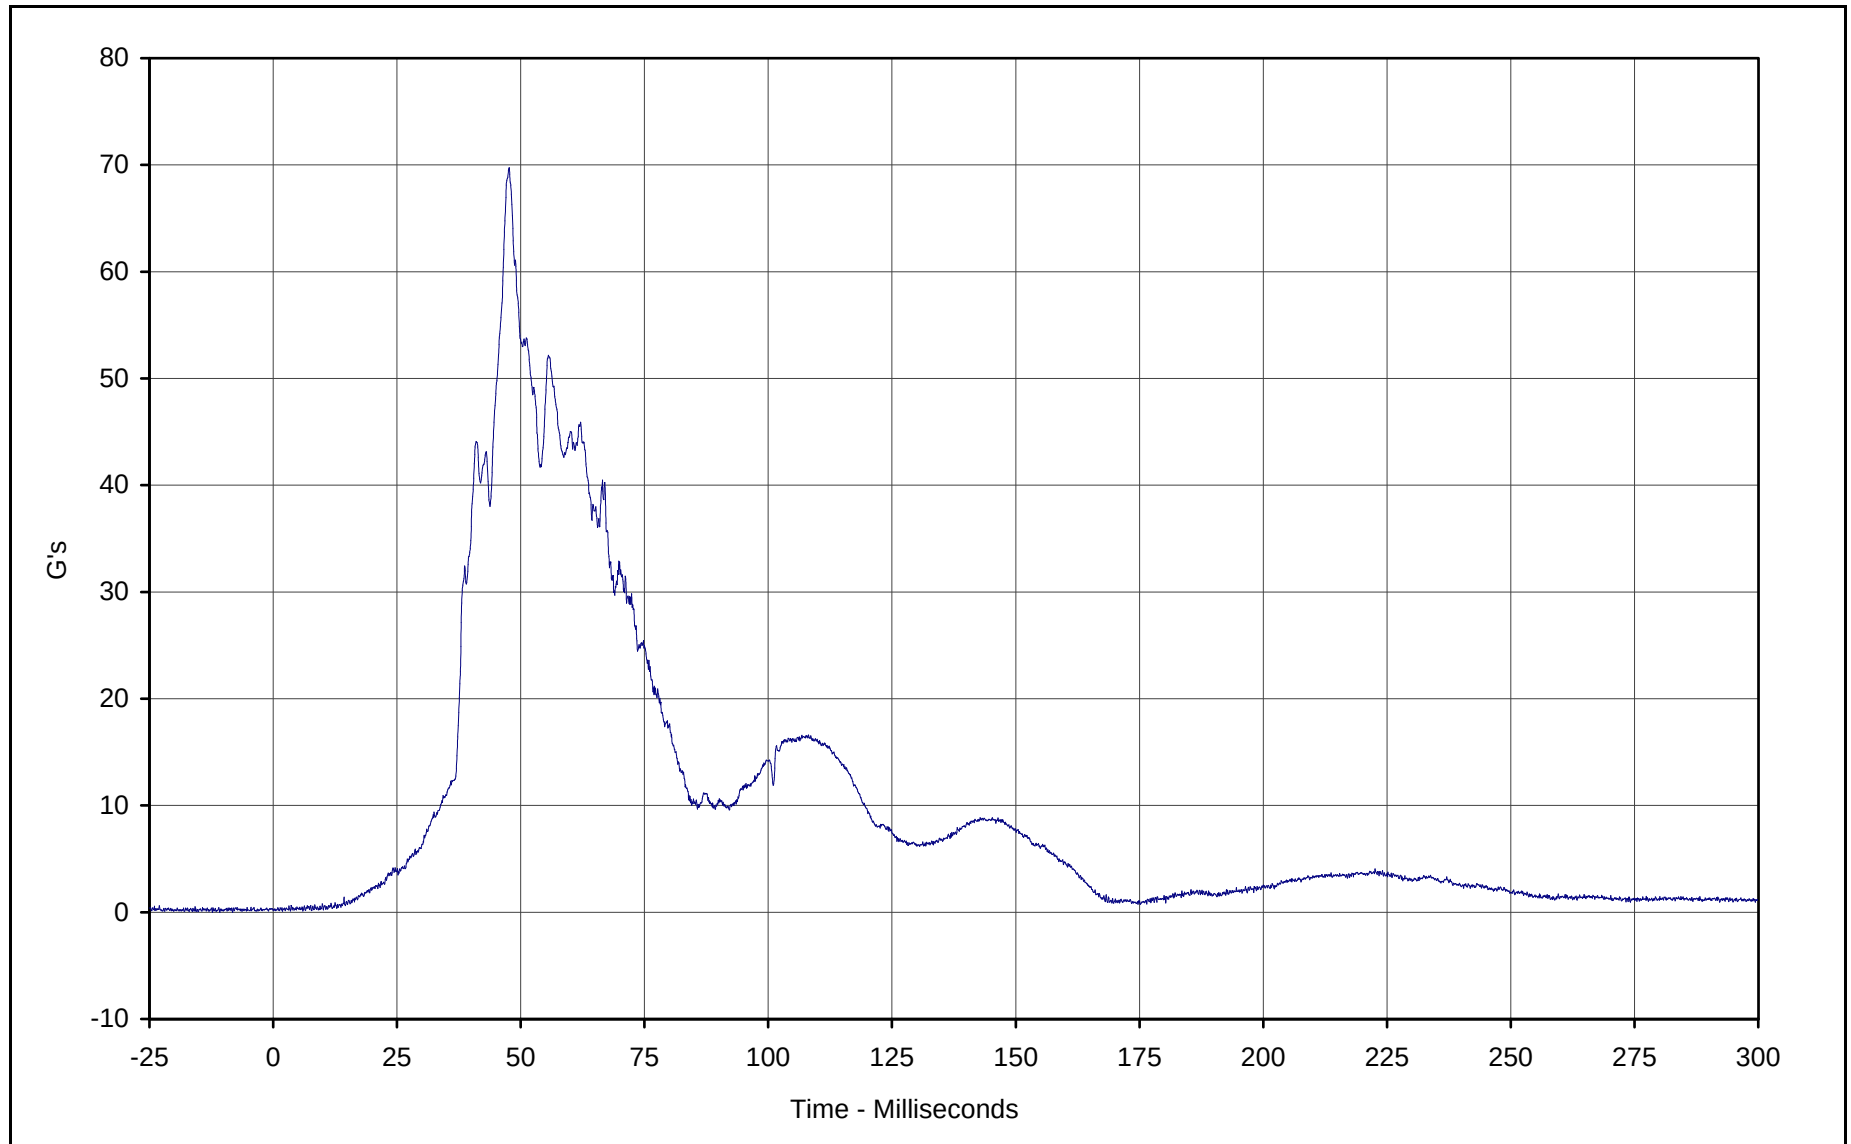


Curve Description: Driver Pelvis Resultant
Maximum Value: 69.7 at 47.7 Milliseconds
Minimum Value: 0.1 at 1.9 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: RES-020

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-40

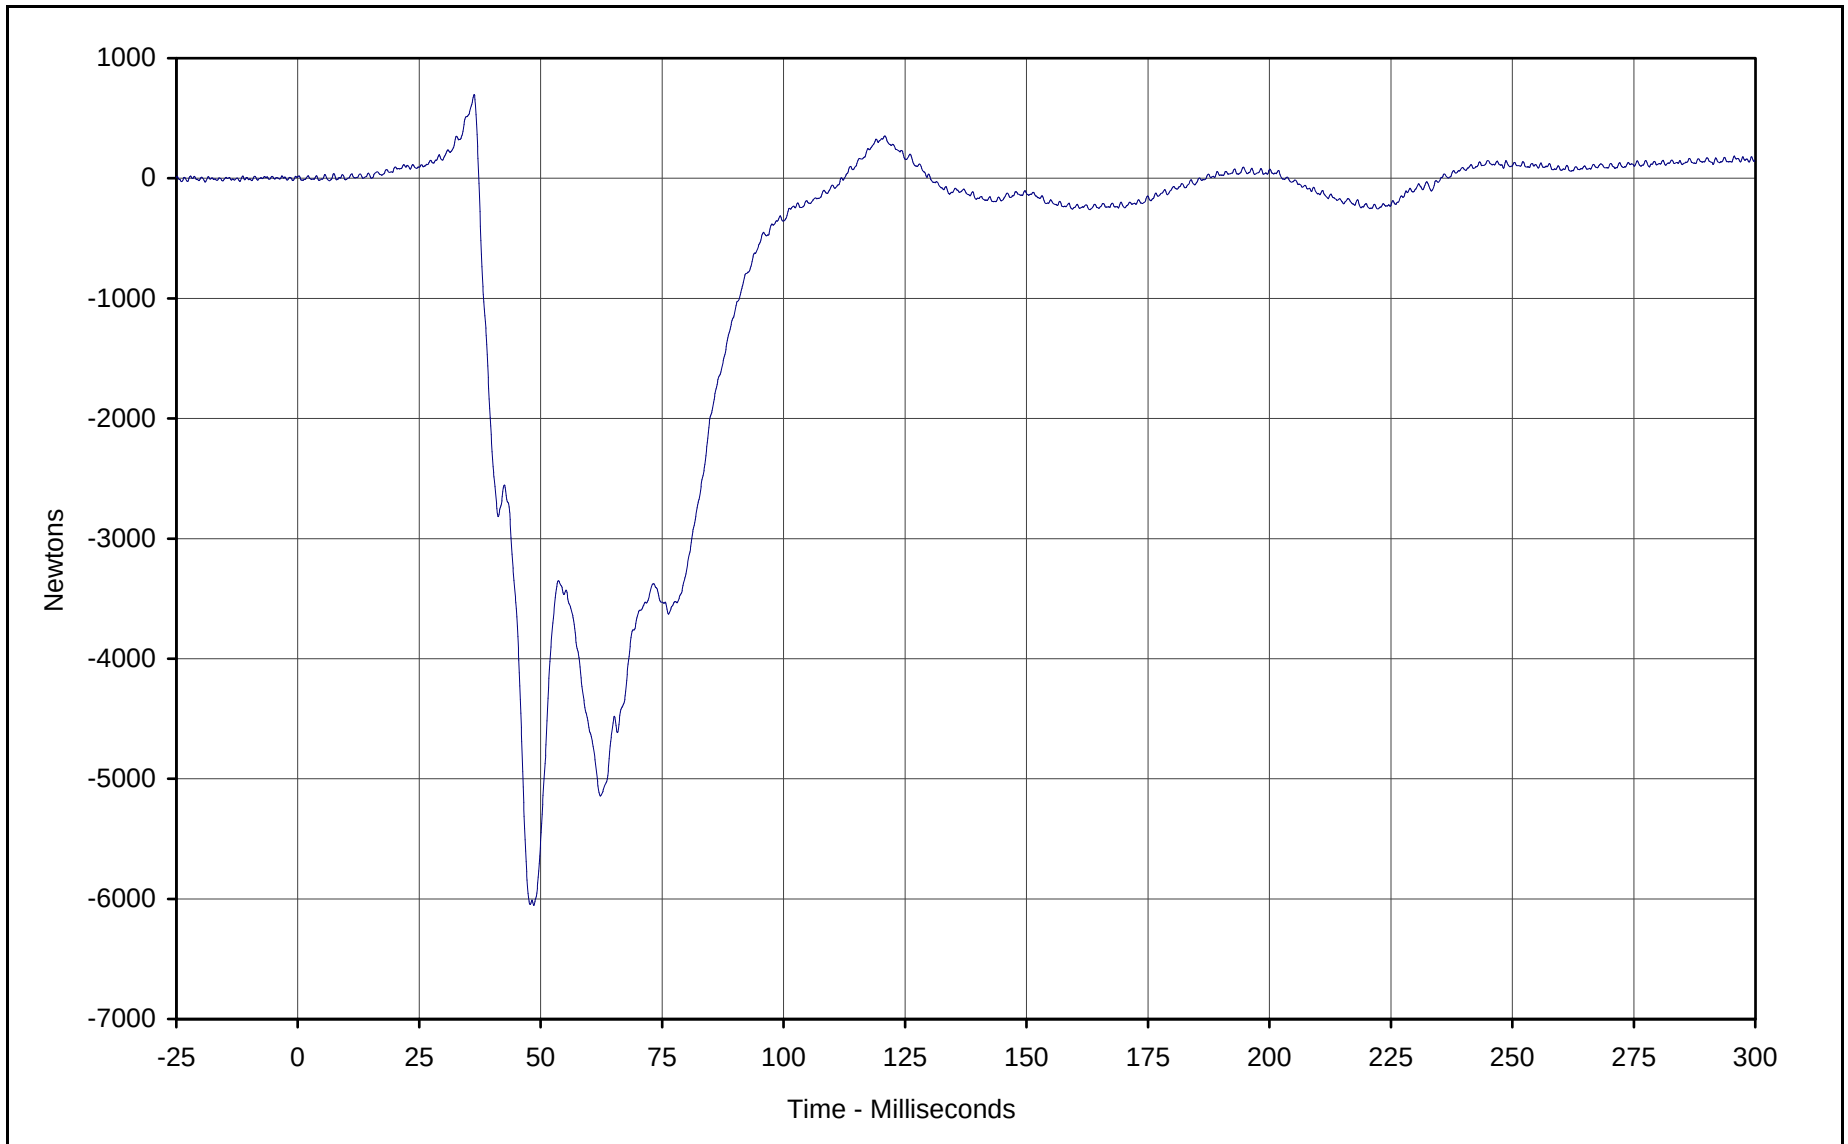


Curve Description: Driver Left Femur Force
Maximum Value: 699.0 at 36.3 Milliseconds
Minimum Value: -6053.5 at 48.6 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: FIL-023

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup




KAR21001-10

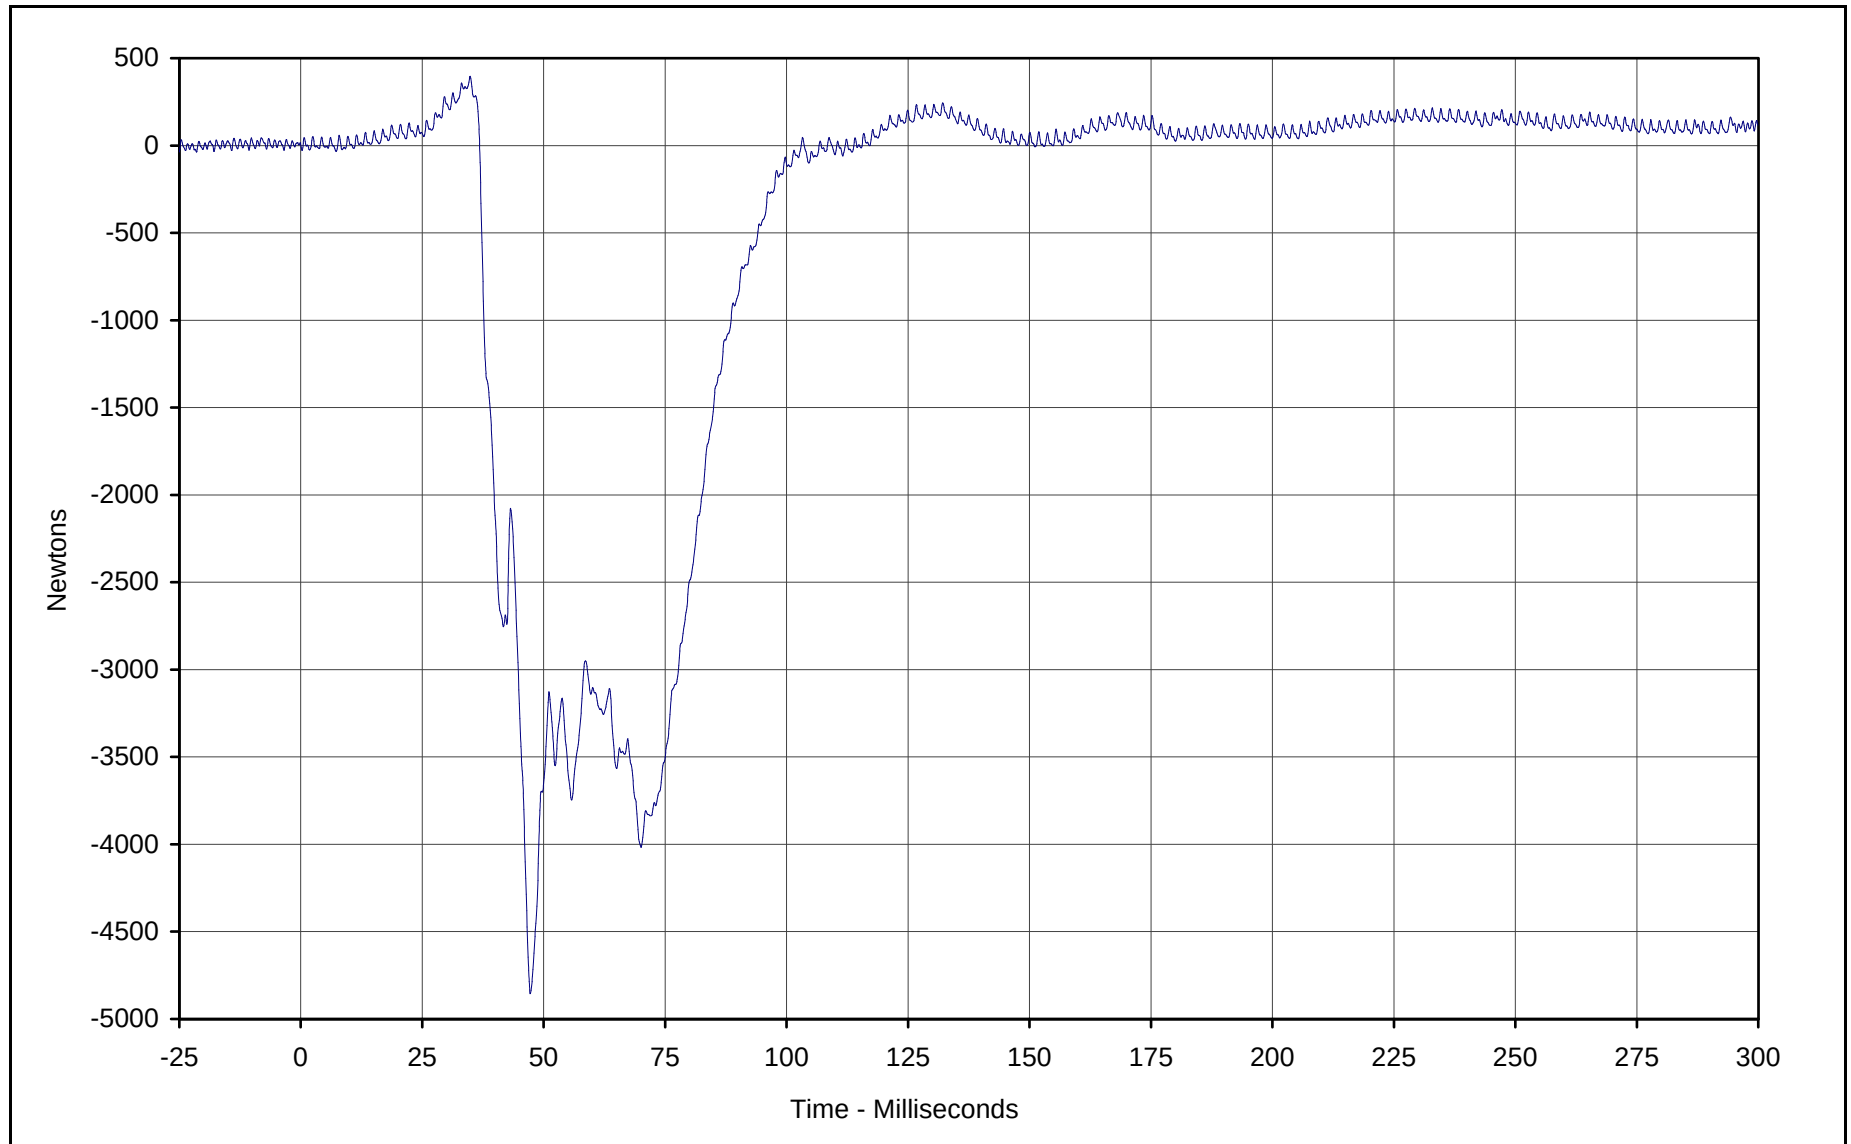

Curve Description: Driver Right Femur Force
Maximum Value: 396.1 at 34.9 Milliseconds
Minimum Value: -4855.5 at 47.2 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: FIL-024

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



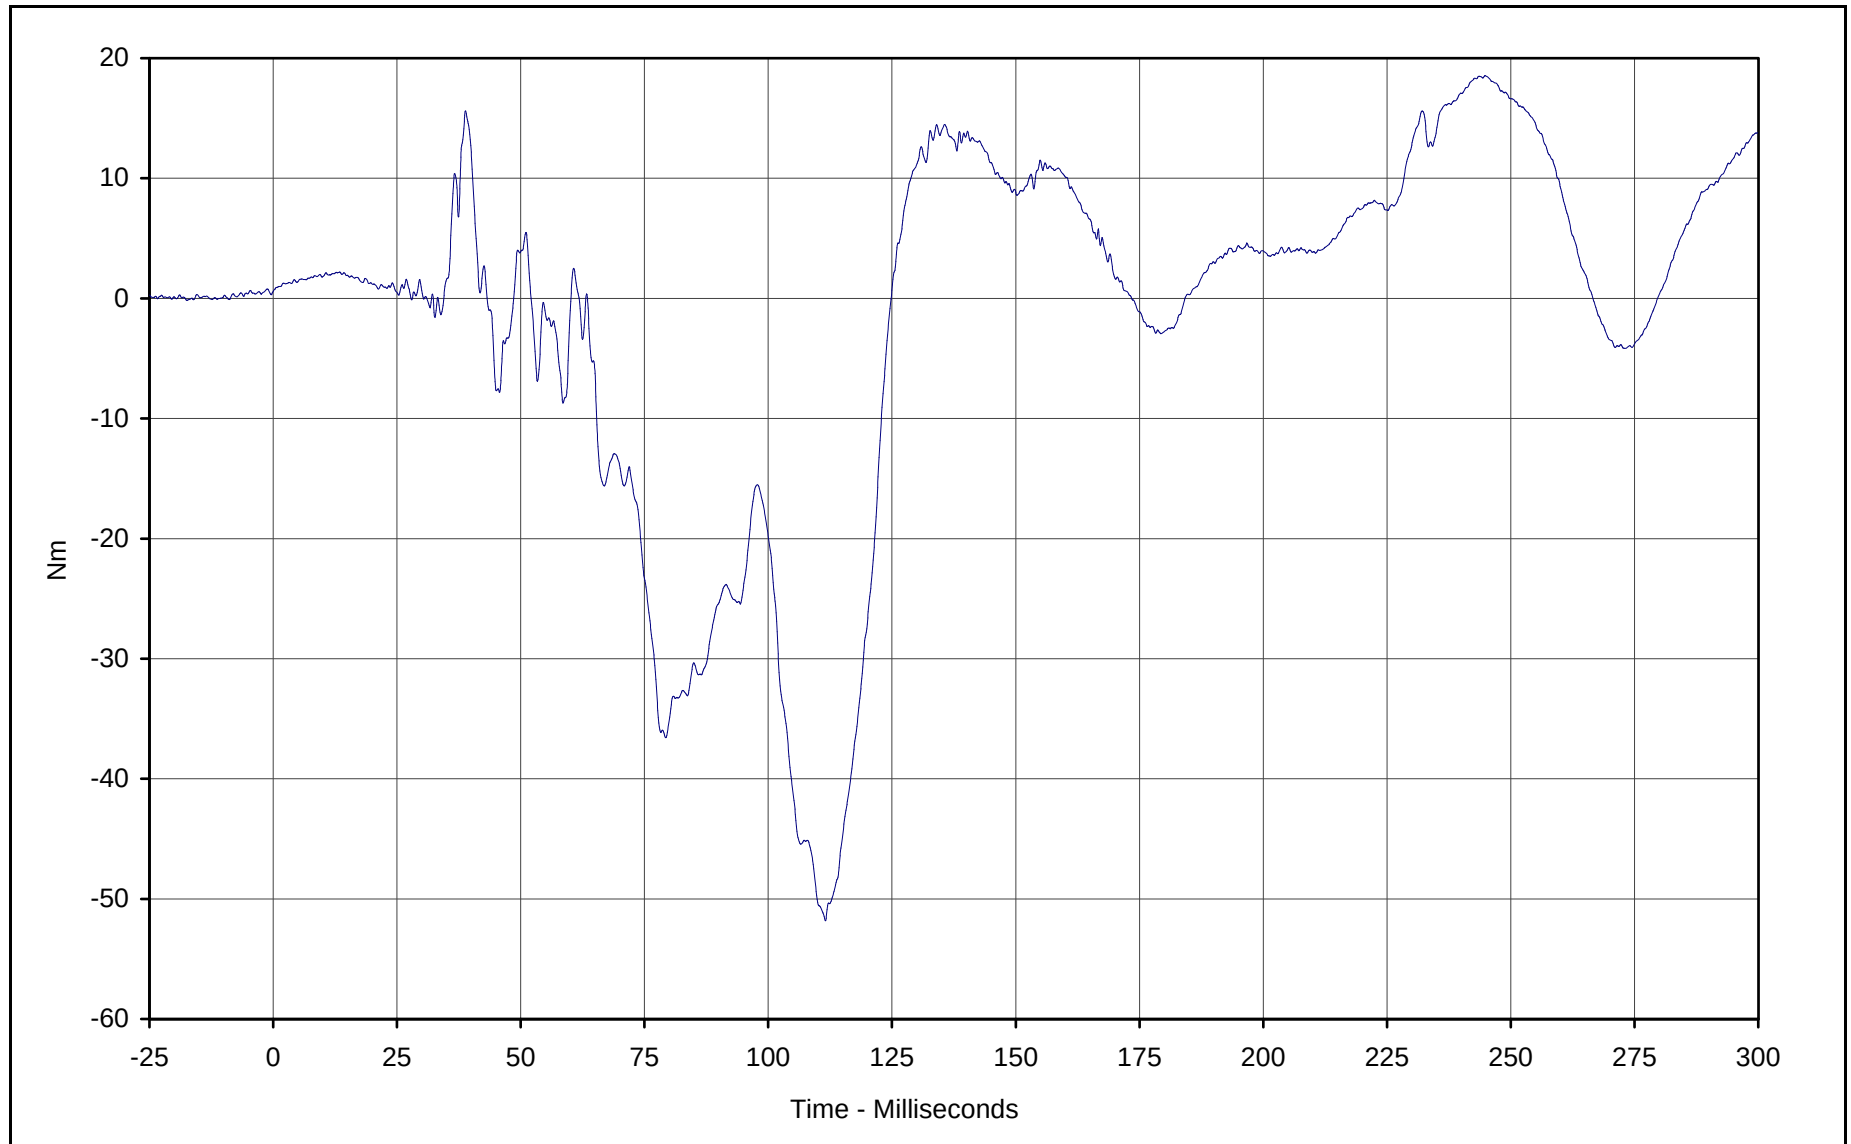


Curve Description: Driver Left Upper Tibia Moment X
Maximum Value: 18.6 at 244.8 Milliseconds
Minimum Value: -51.8 at 111.6 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: FIL-025

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-43

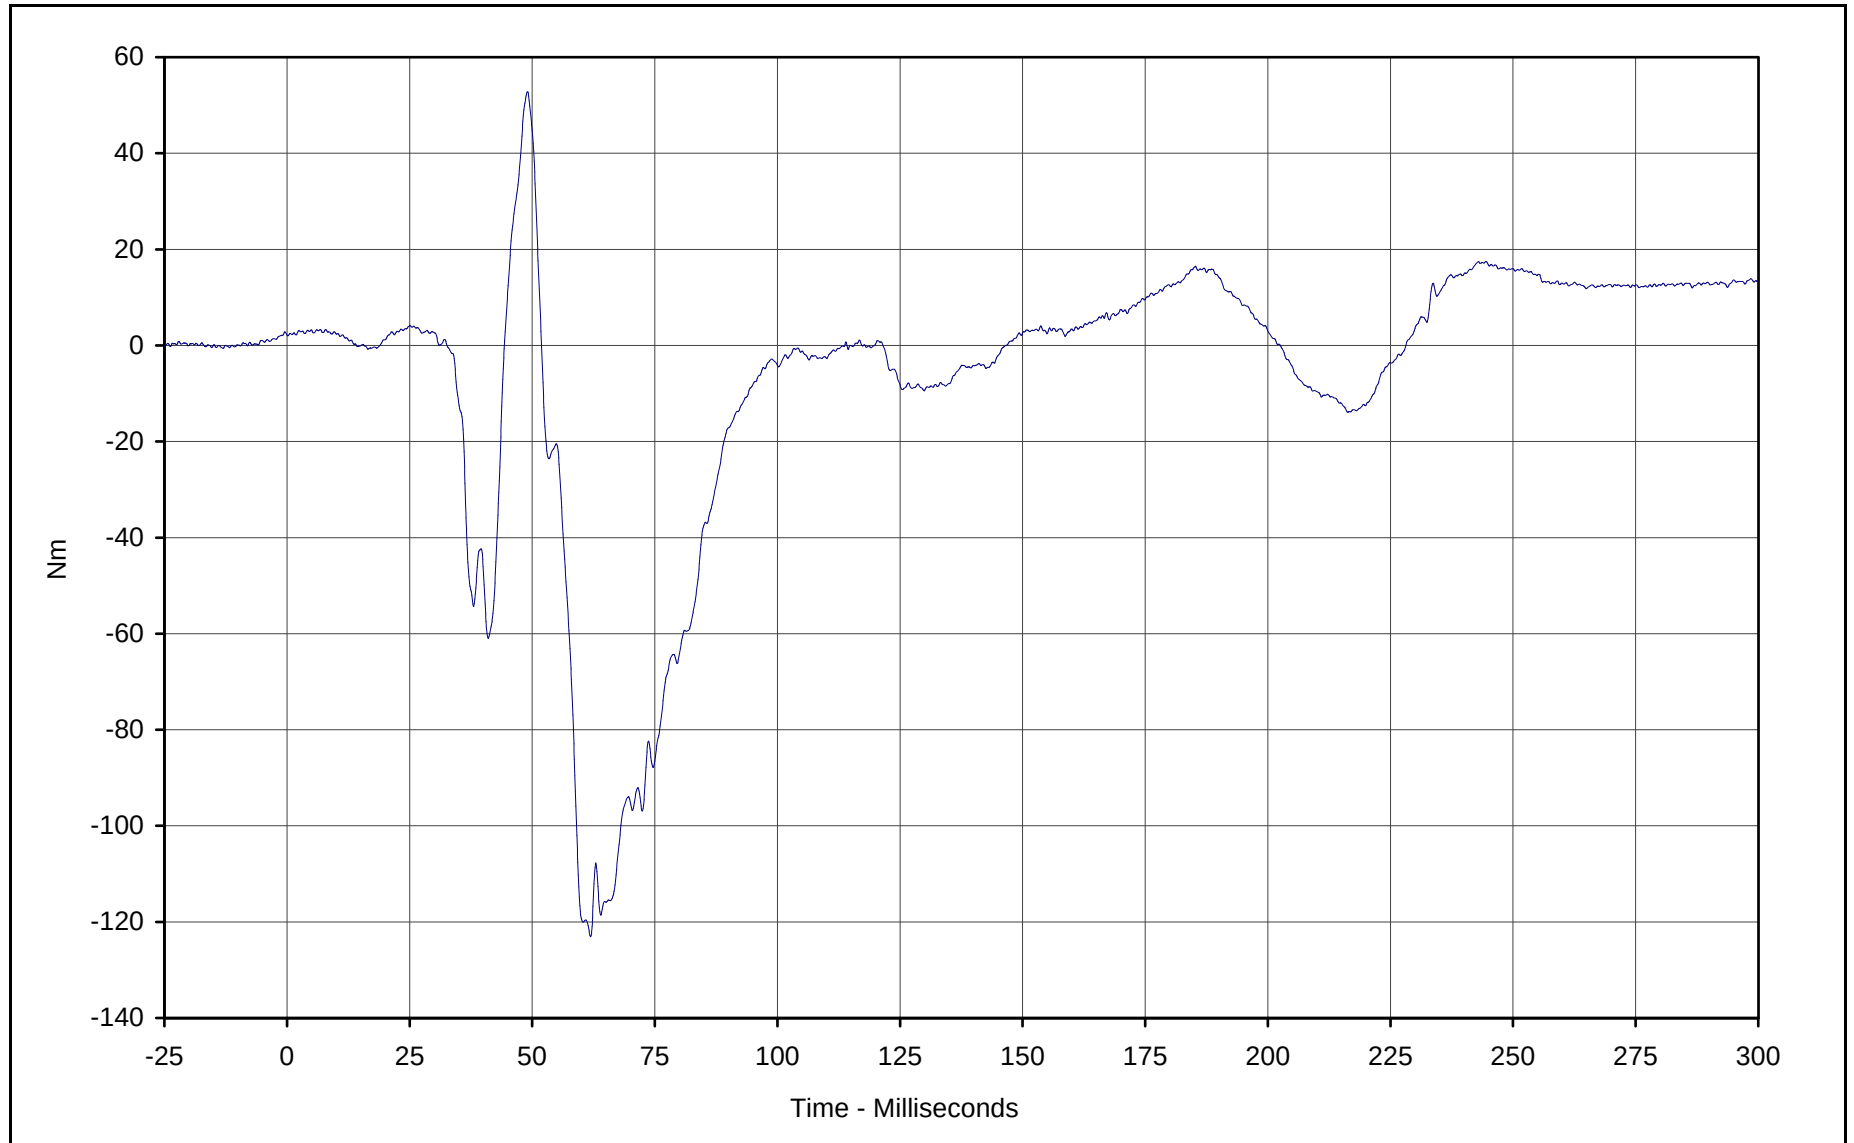


Curve Description: Driver Left Upper Tibia Moment Y
Maximum Value: 52.8 at 49.0 Milliseconds
Minimum Value: -123.1 at 61.9 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: FIL-026

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

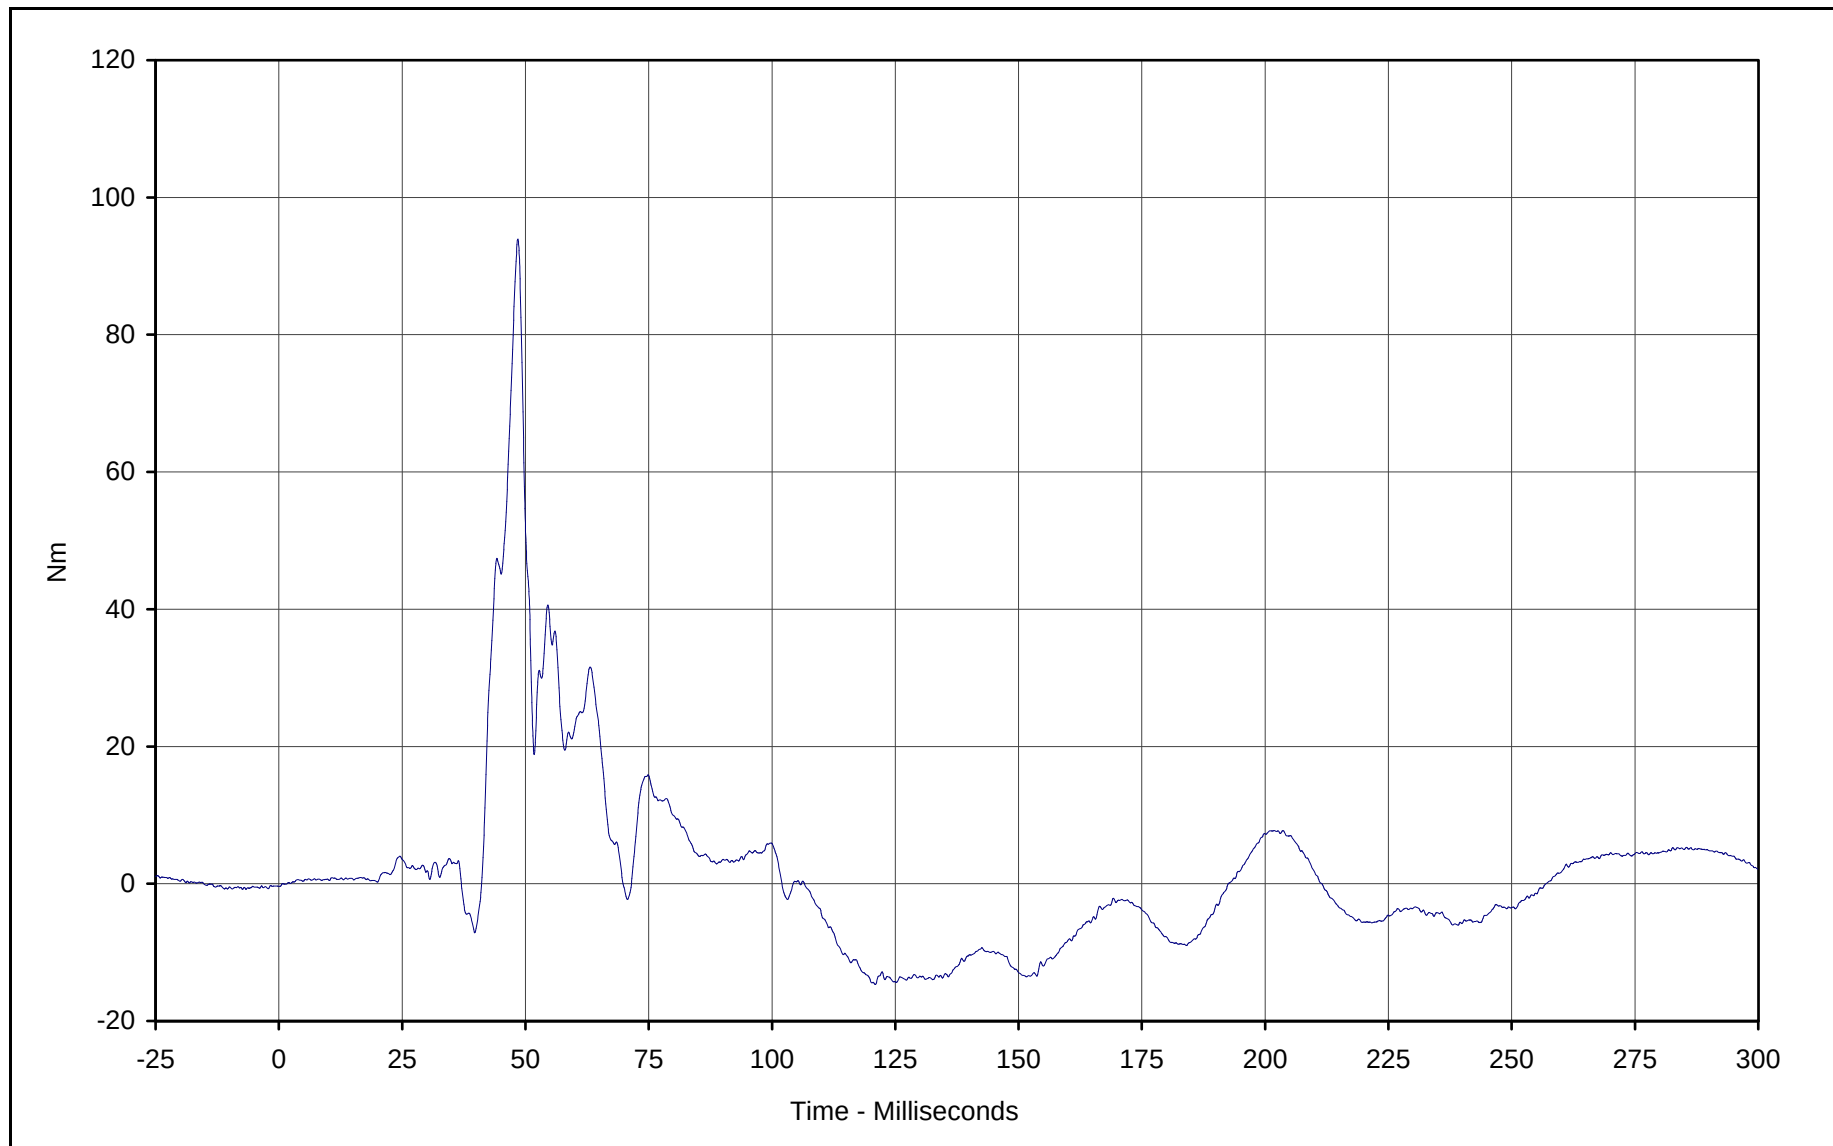


Curve Description: Driver Right Upper Tibia Moment X
Maximum Value: 93.9 at 48.5 Milliseconds
Minimum Value: -14.7 at 121.0 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: FIL-027

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-45

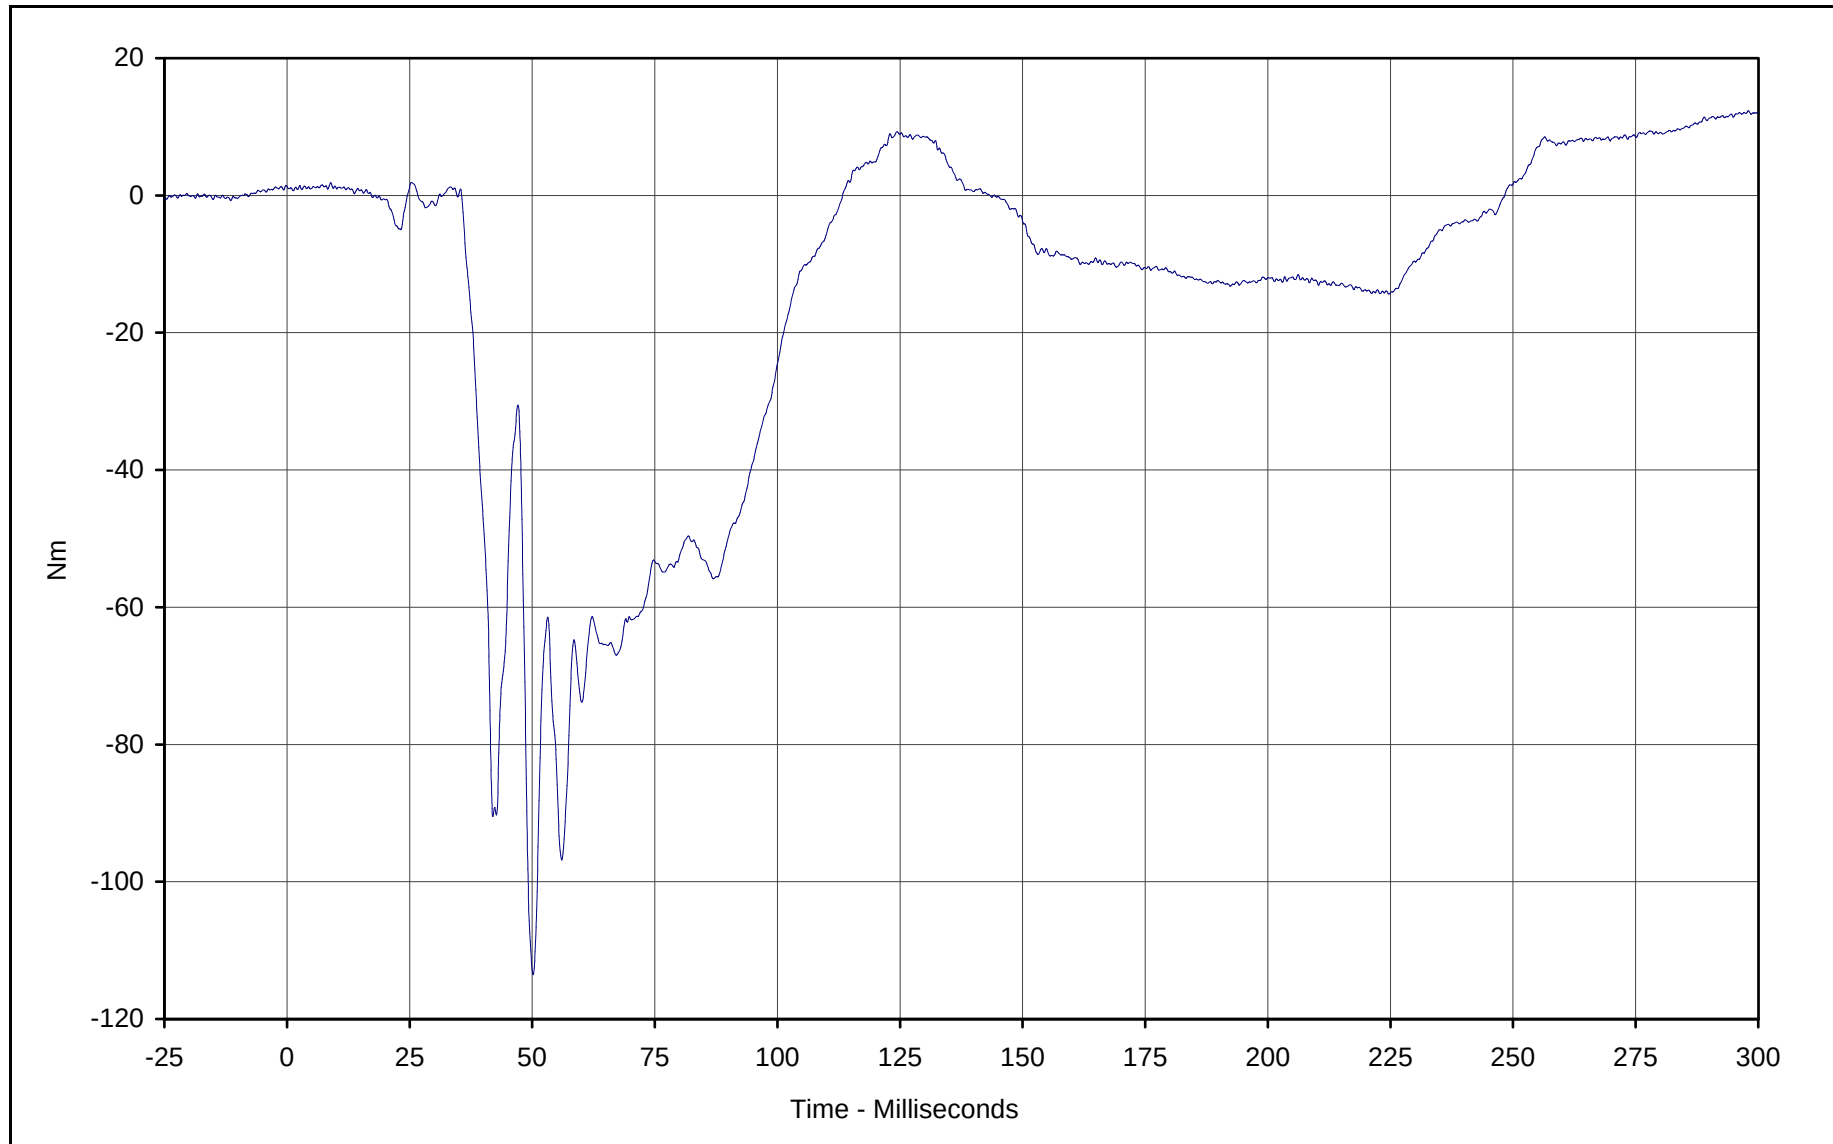


Curve Description: Driver Right Upper Tibia Moment Y
Maximum Value: 12.3 at 298.0 Milliseconds
Minimum Value: -113.6 at 50.2 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: FIL-028

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup




KAR21001-10

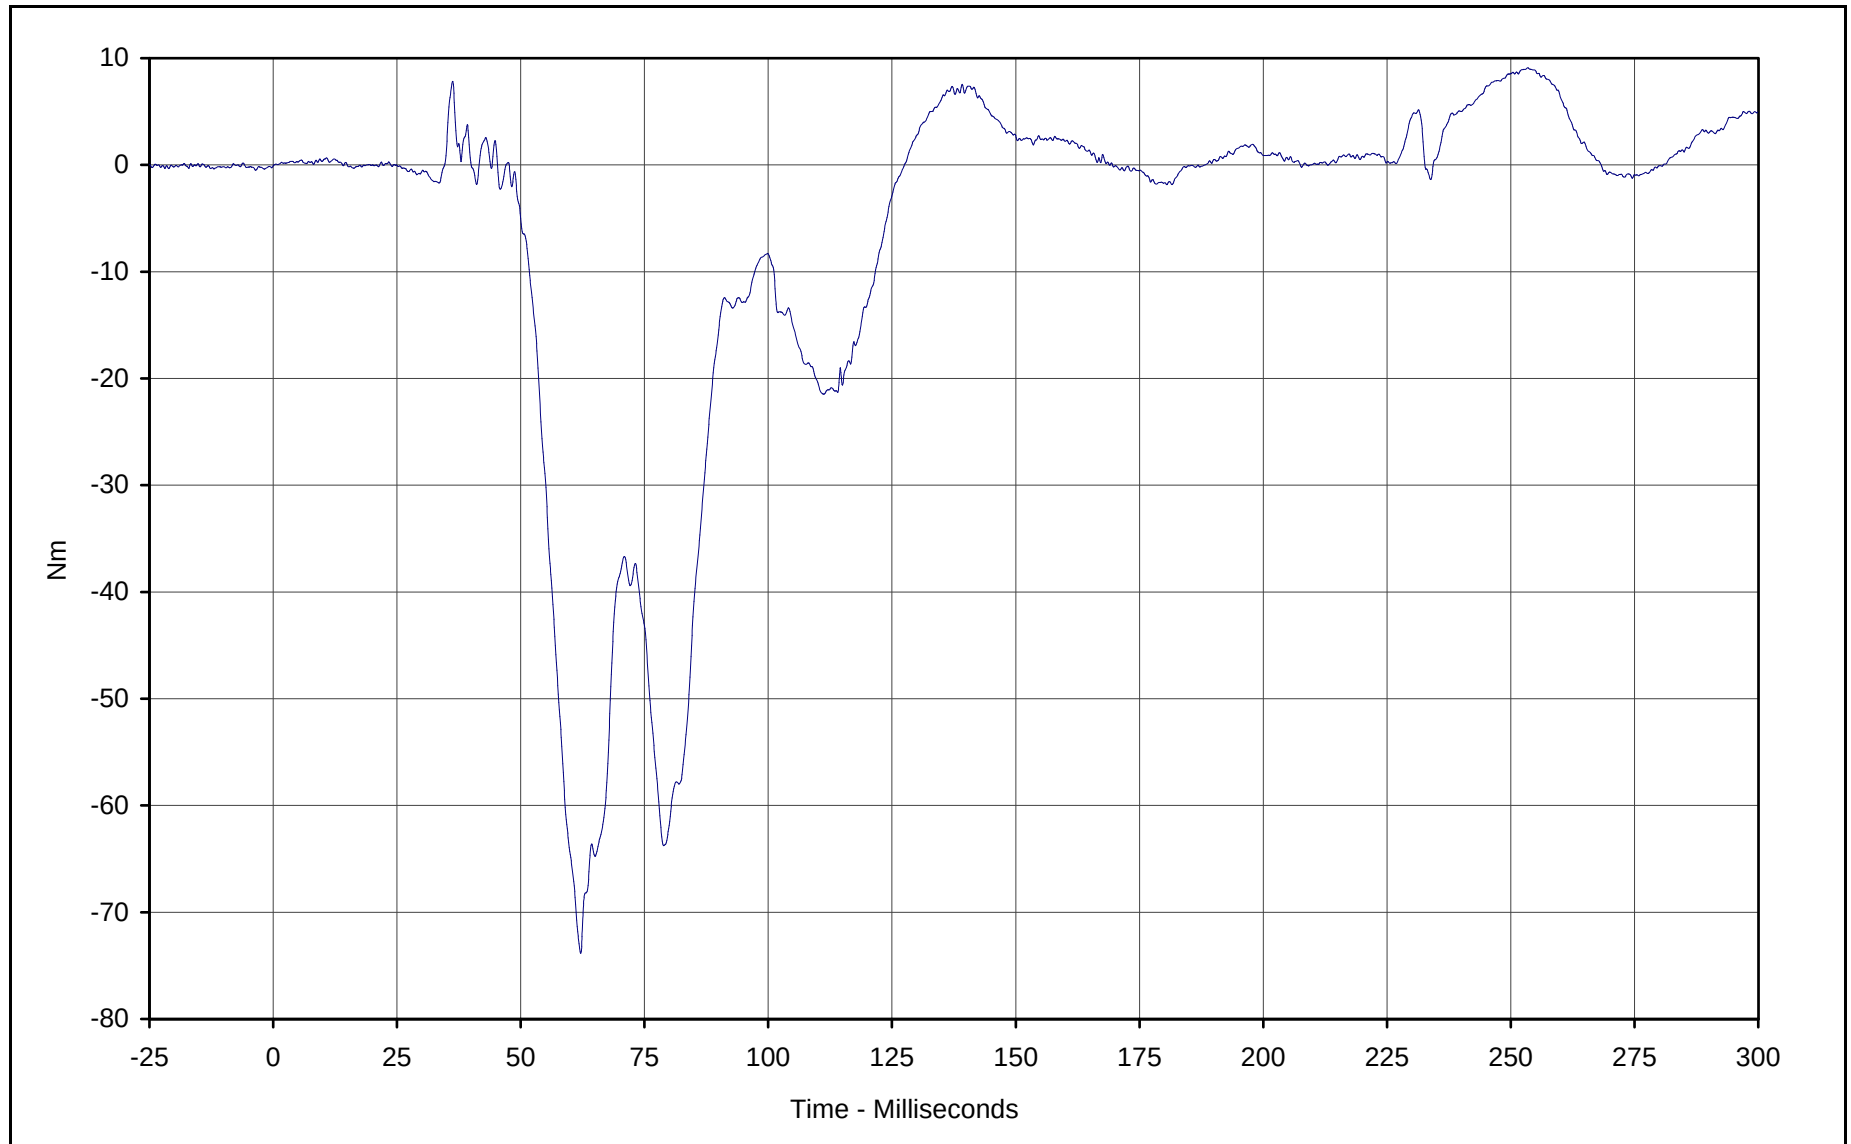

Curve Description: Driver Left Lower Tibia Moment X
Maximum Value: 9.1 at 253.4 Milliseconds
Minimum Value: -73.9 at 62.1 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: FIL-029

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup




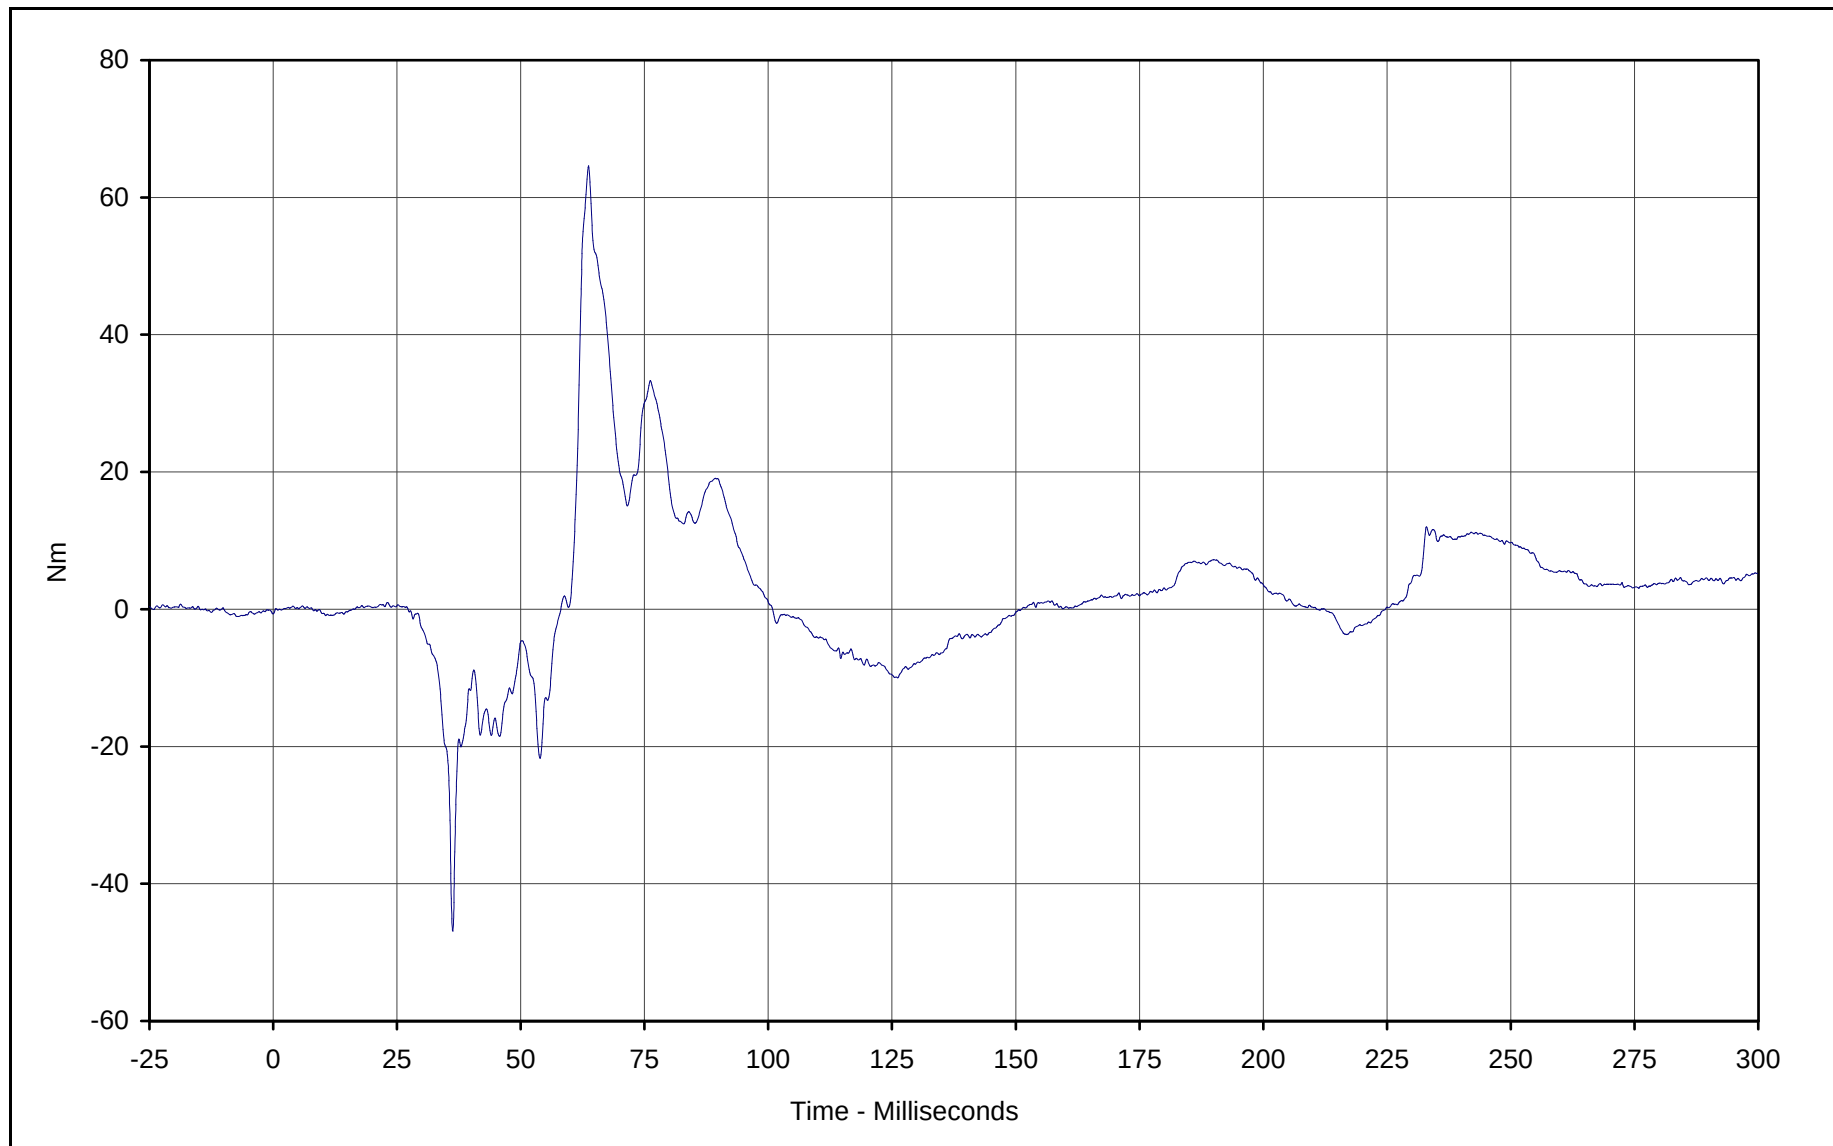

Curve Description: Driver Left Lower Tibia Moment Y
Maximum Value: 64.6 at 63.7 Milliseconds
Minimum Value: -46.9 at 36.3 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: FIL-030

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup




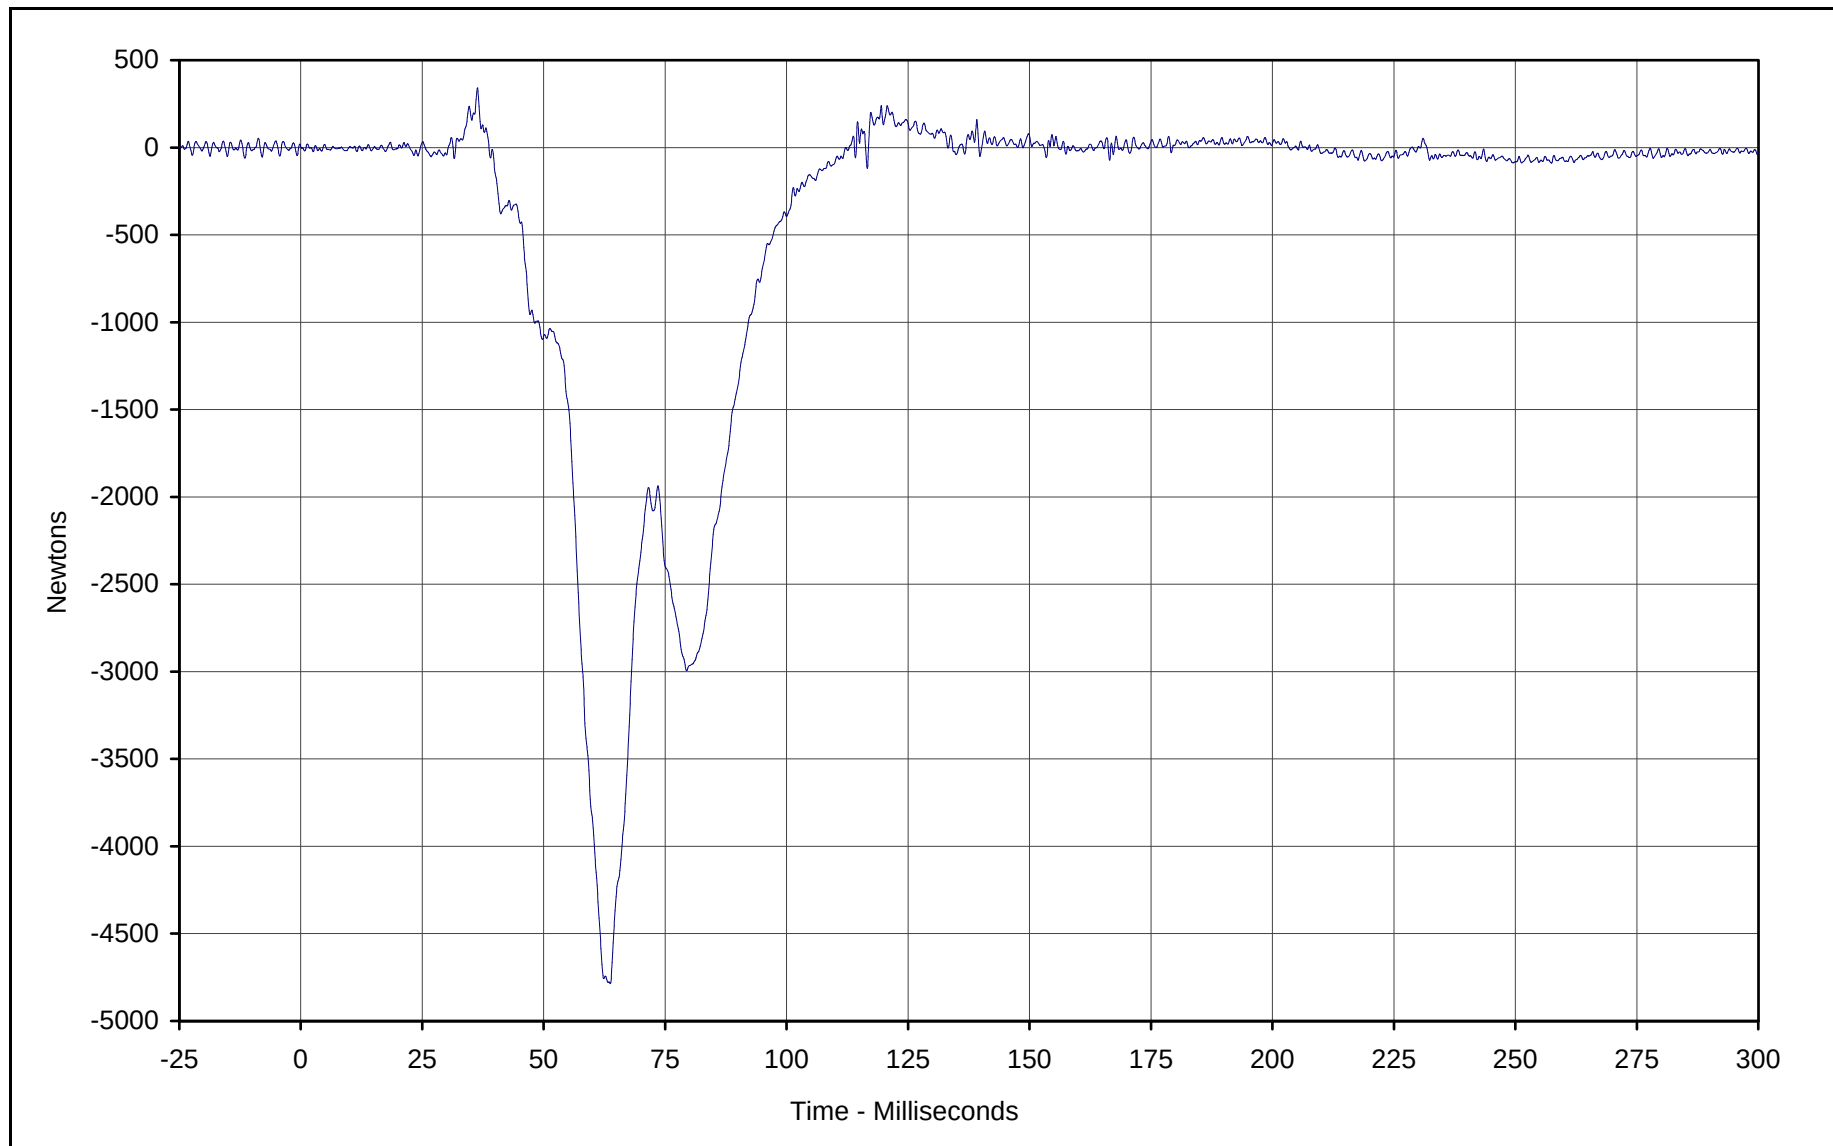

Curve Description: Driver Left Lower Tibia Force Z
Maximum Value: 341.6 at 36.4 Milliseconds
Minimum Value: -4785.6 at 63.7 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: FIL-031

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



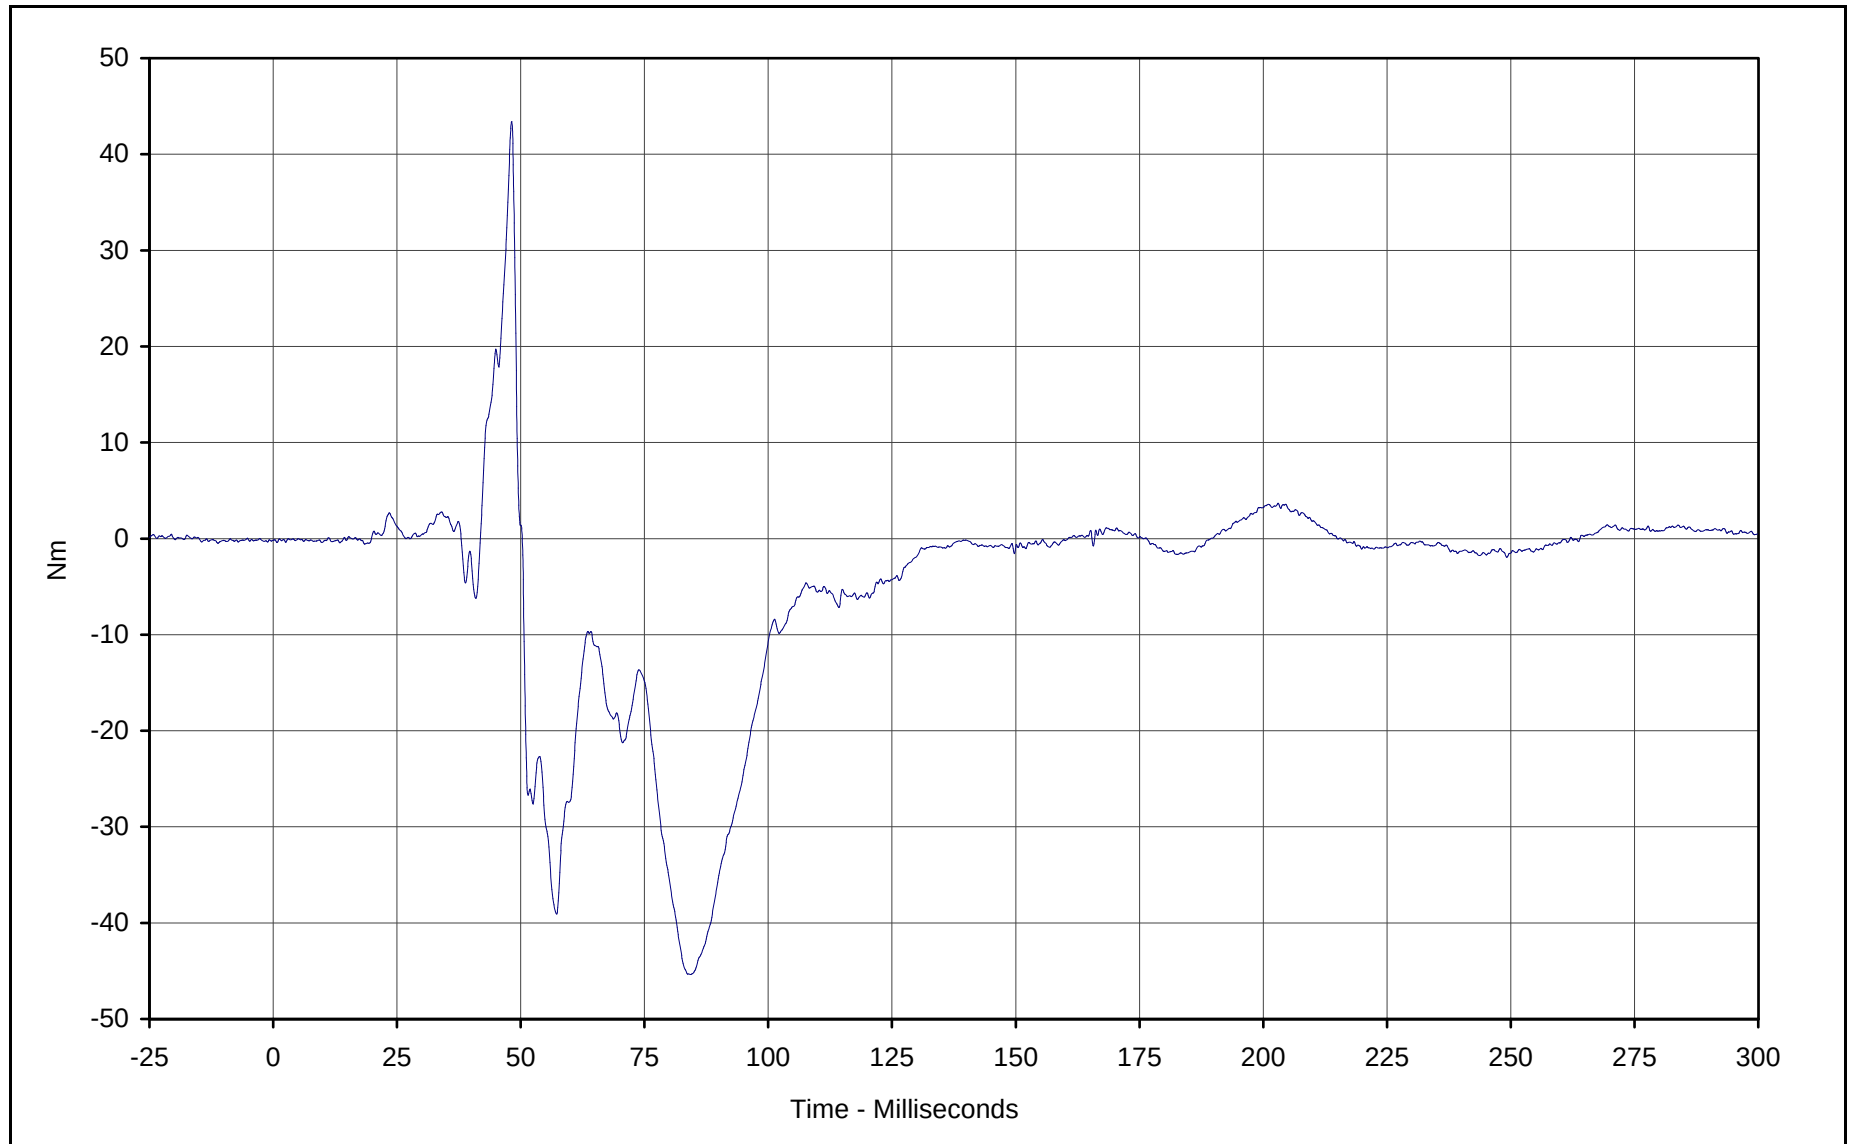


Curve Description: Driver Right Lower Tibia Moment X
Maximum Value: 43.4 at 48.2 Milliseconds
Minimum Value: -45.4 at 84.3 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: FIL-032

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-50

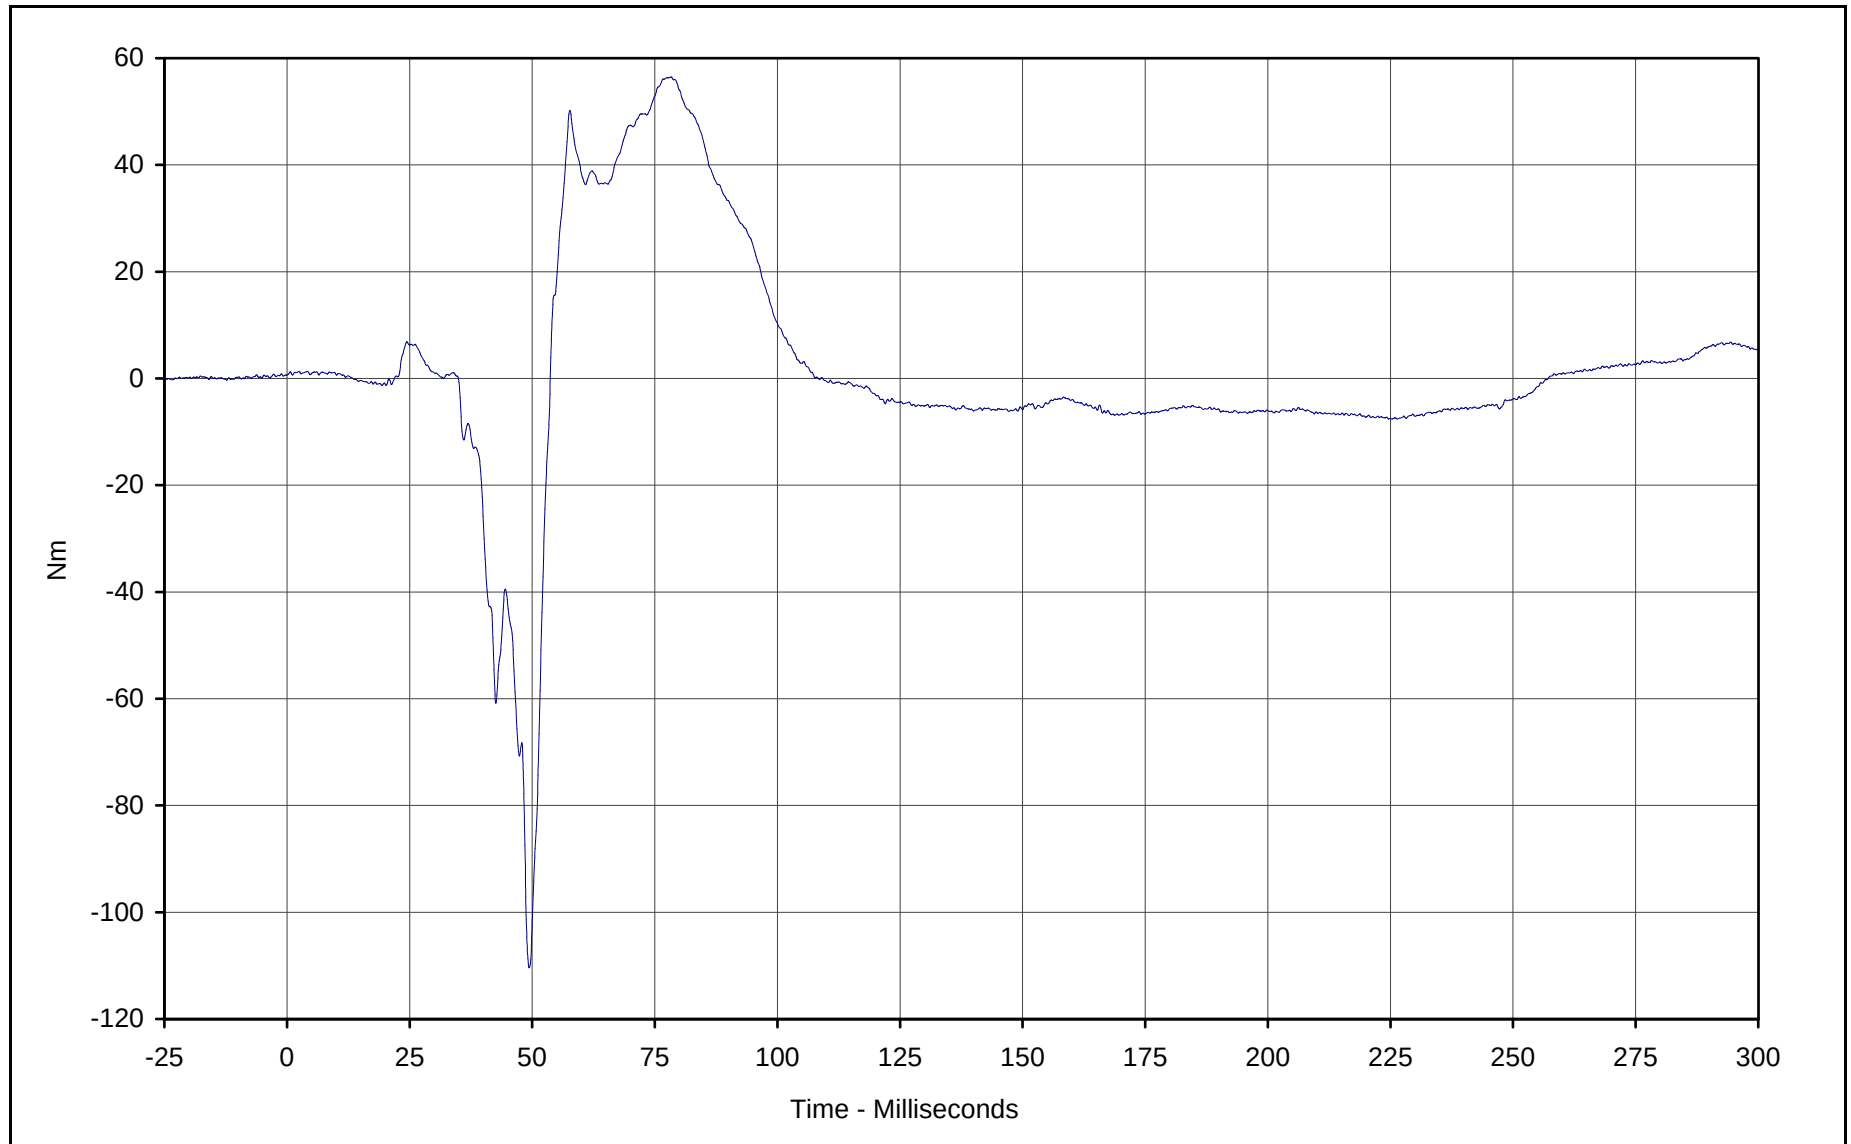


Curve Description: Driver Right Lower Tibia Moment Y
Maximum Value: 56.5 at 78.4 Milliseconds
Minimum Value: -110.4 at 49.4 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: FIL-033

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

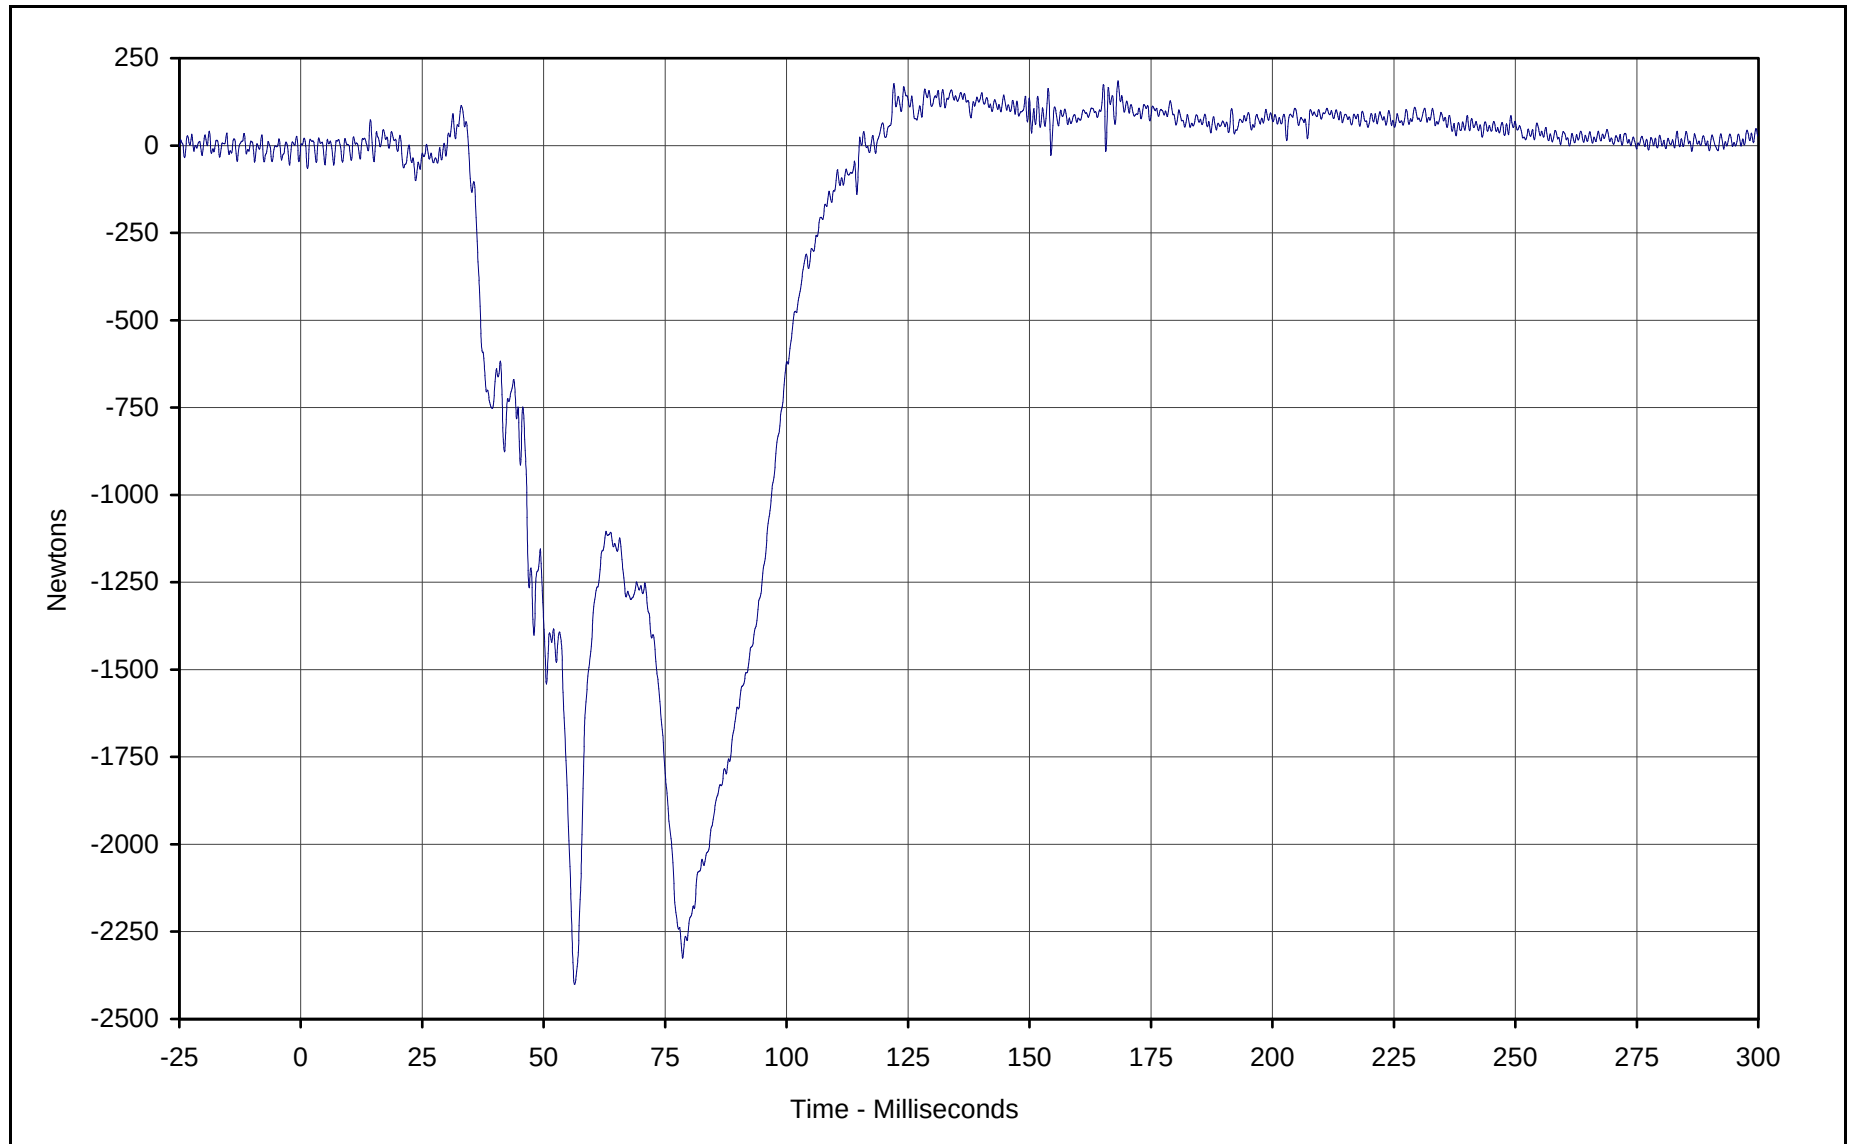


Curve Description: Driver Right Lower Tibia Force Z
Maximum Value: 185.4 at 168.2 Milliseconds
Minimum Value: -2400.6 at 56.4 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: FIL-034

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-52

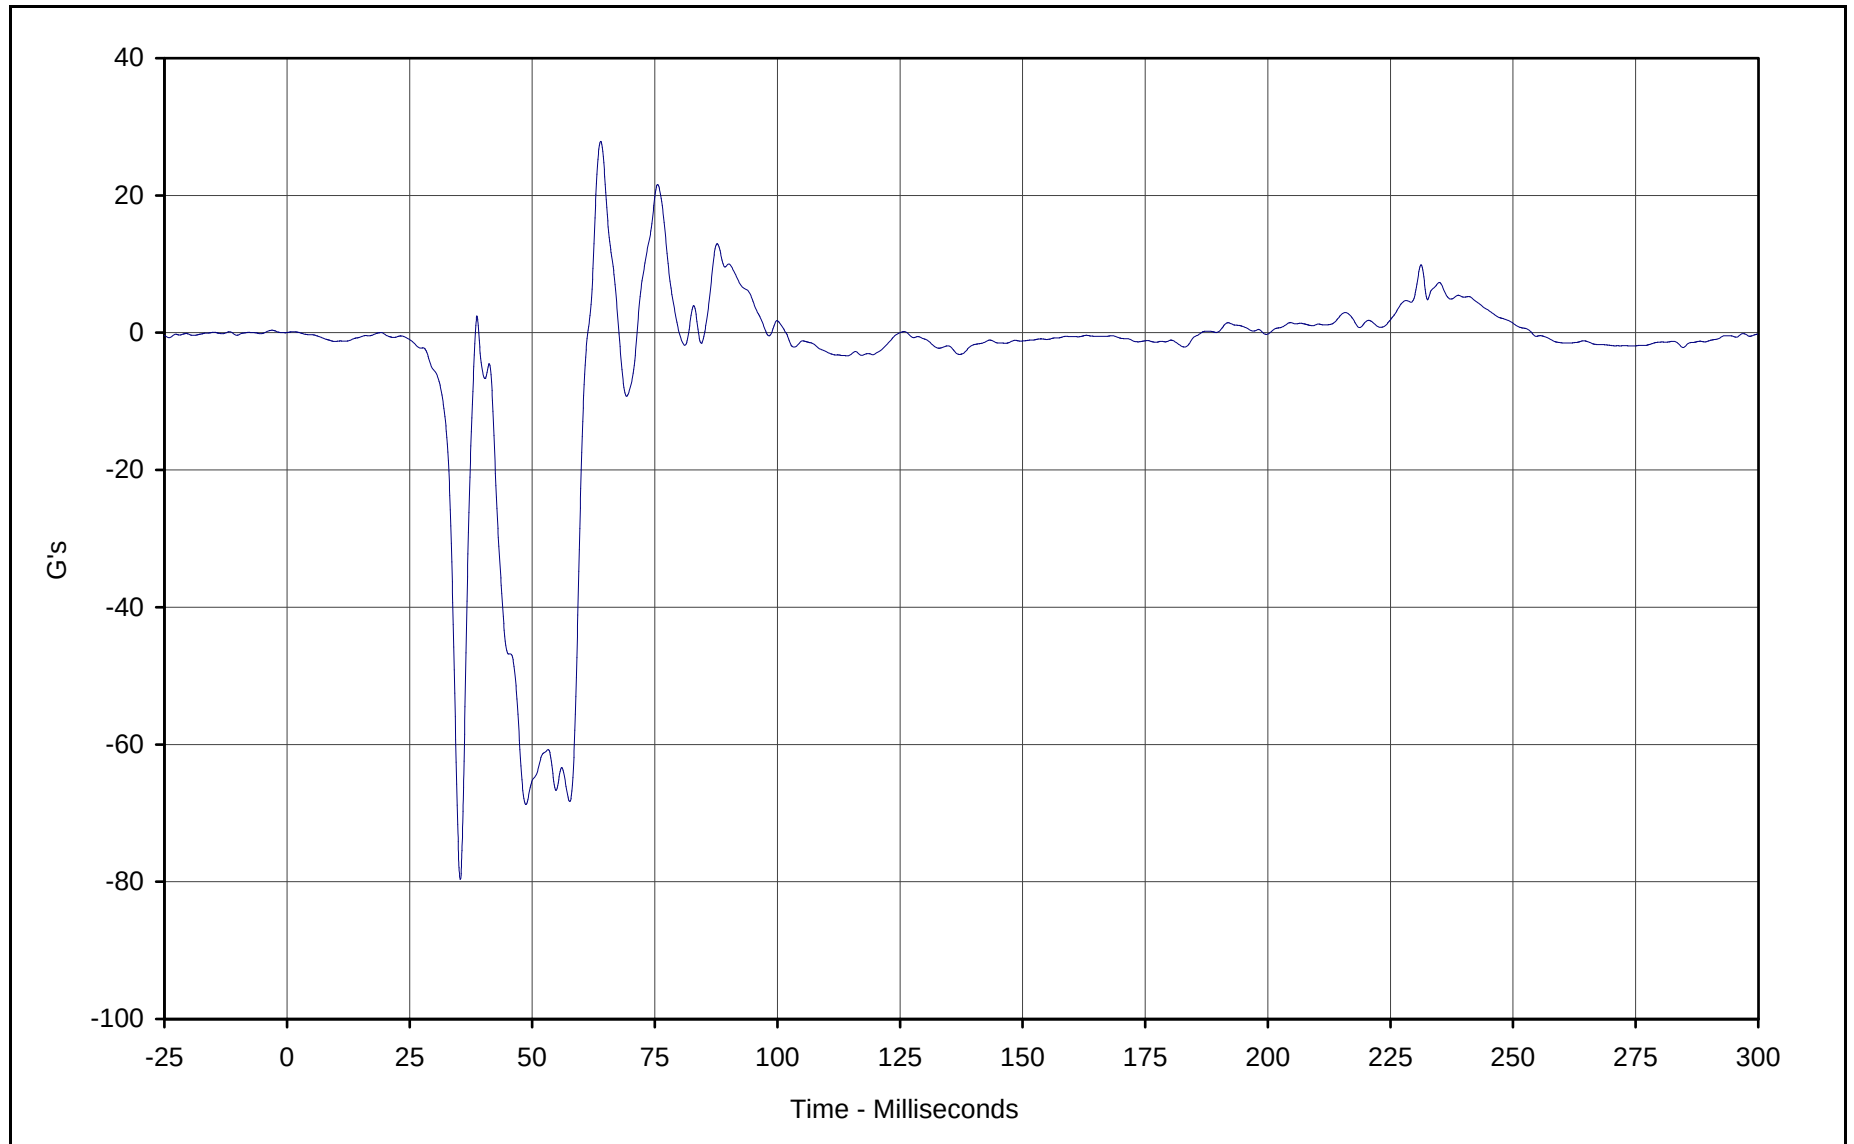


Curve Description: Driver Left Foot Aft X
Maximum Value: 27.9 at 64.0 Milliseconds
Minimum Value: -79.6 at 35.3 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: FIL-035

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-53

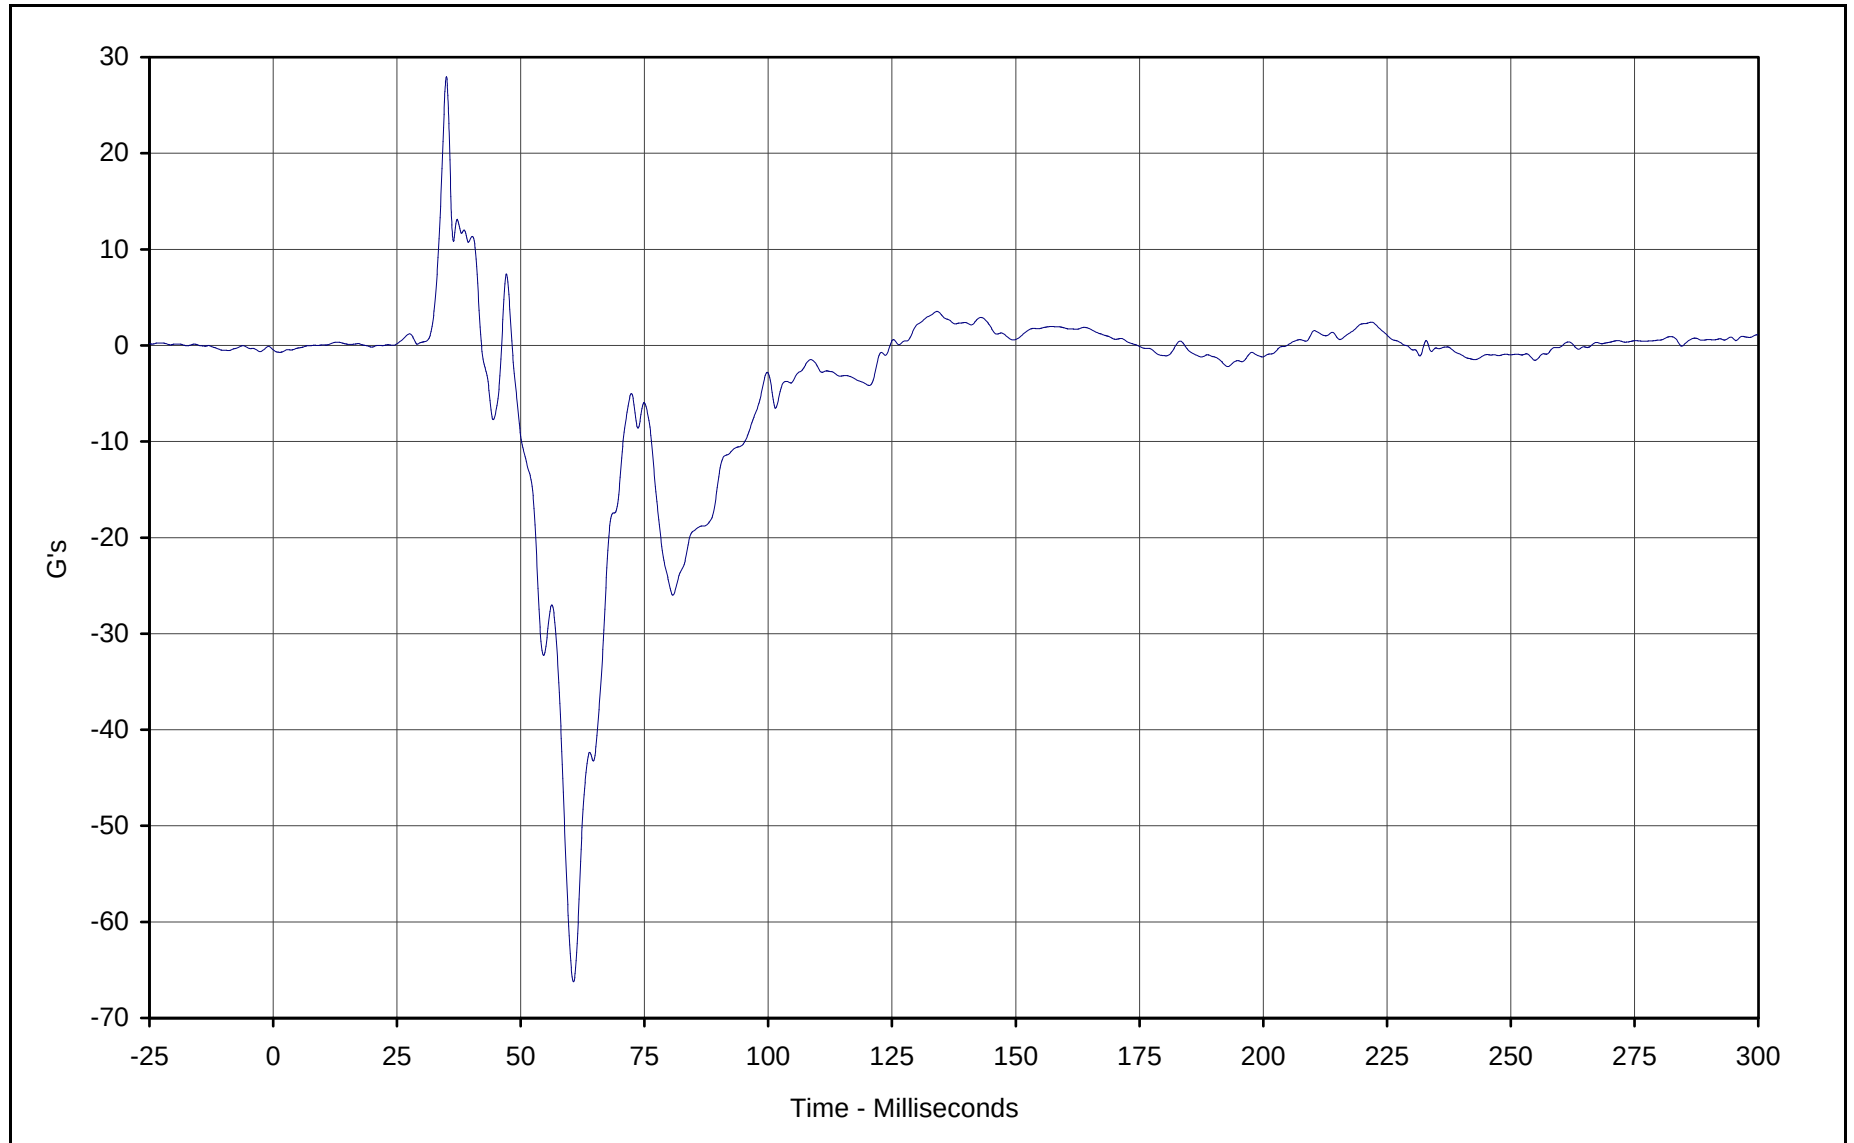

Curve Description: Driver Left Foot Aft Z

Maximum Value: 28.0 at 35.0 Milliseconds

Minimum Value: -66.2 at 60.7 Milliseconds

SAE Filter Class: 180

Date of Test: 02/13/01


Curve Number: FIL-036

Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

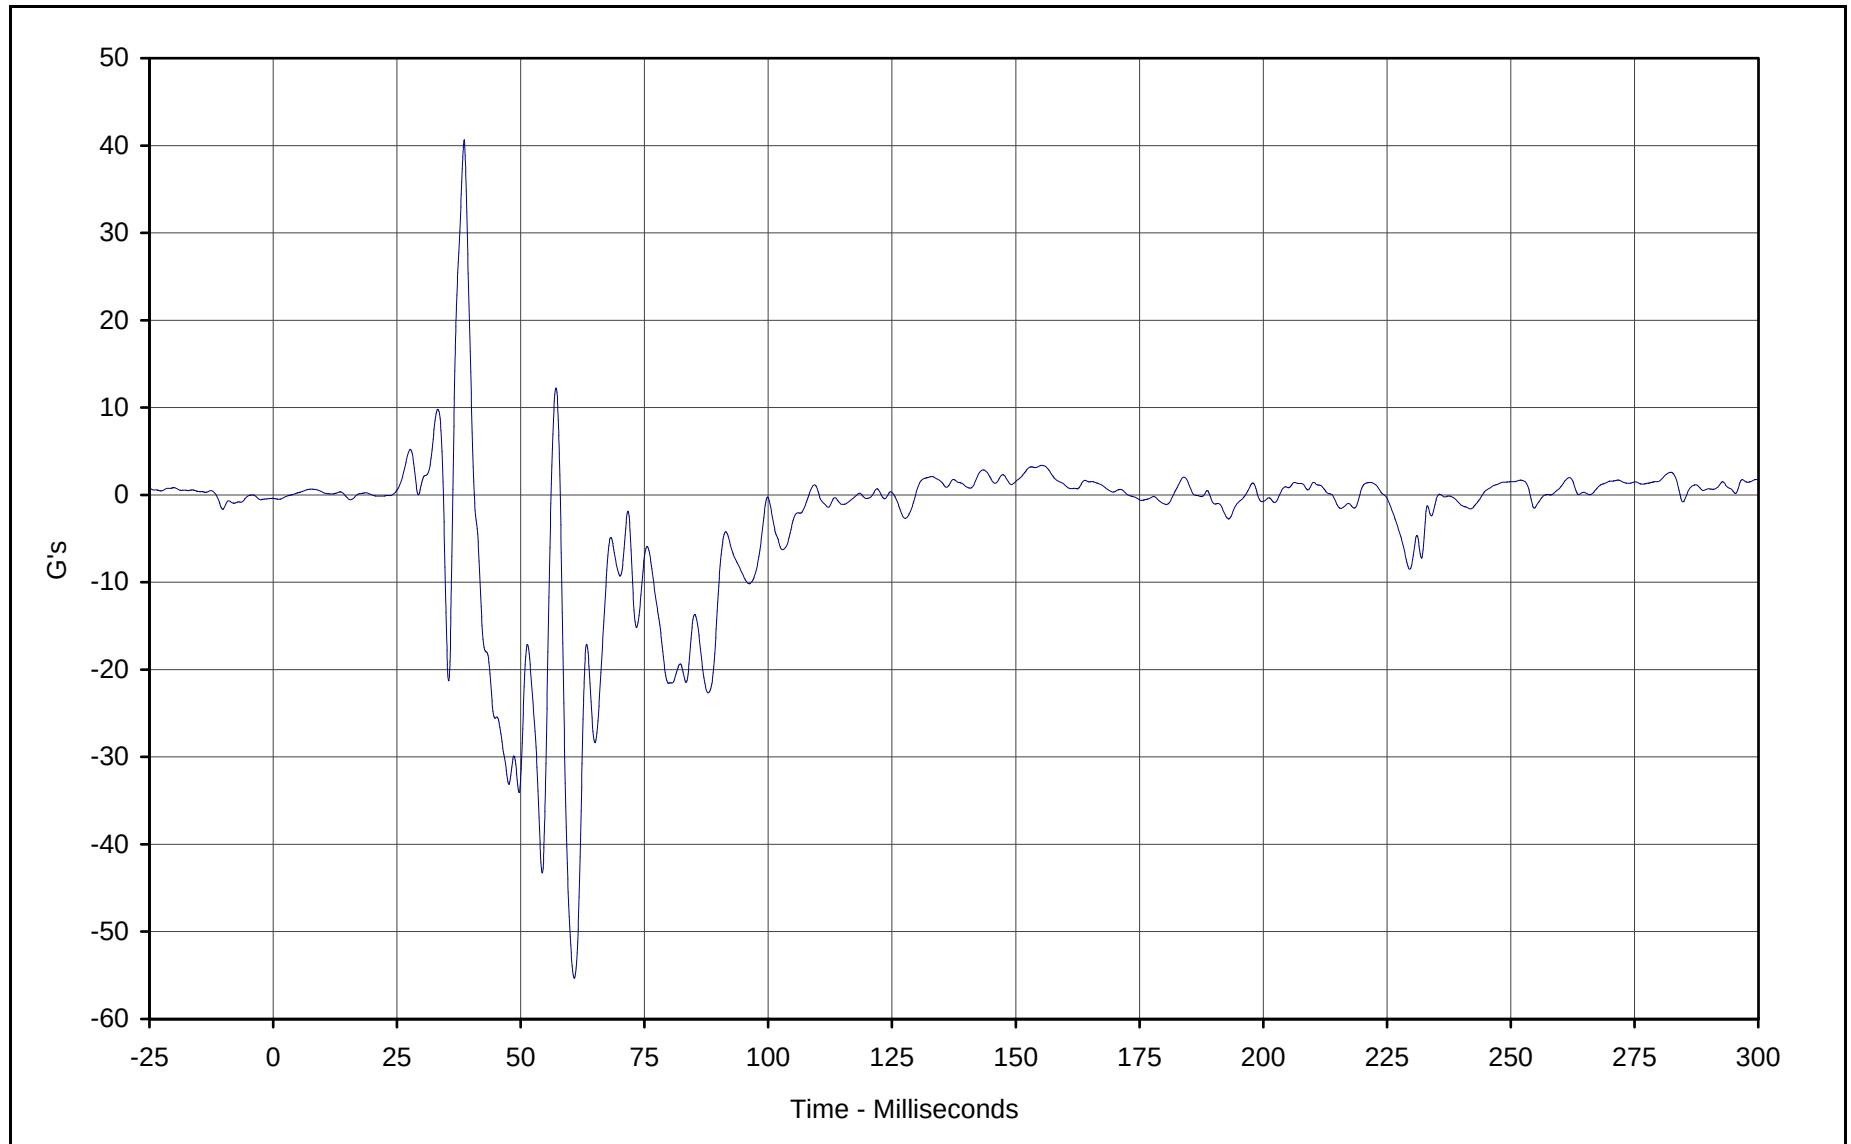


Curve Description: Driver Left Foot Fore Z
Maximum Value: 40.6 at 38.6 Milliseconds
Minimum Value: -55.3 at 60.8 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: FIL-037

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-55

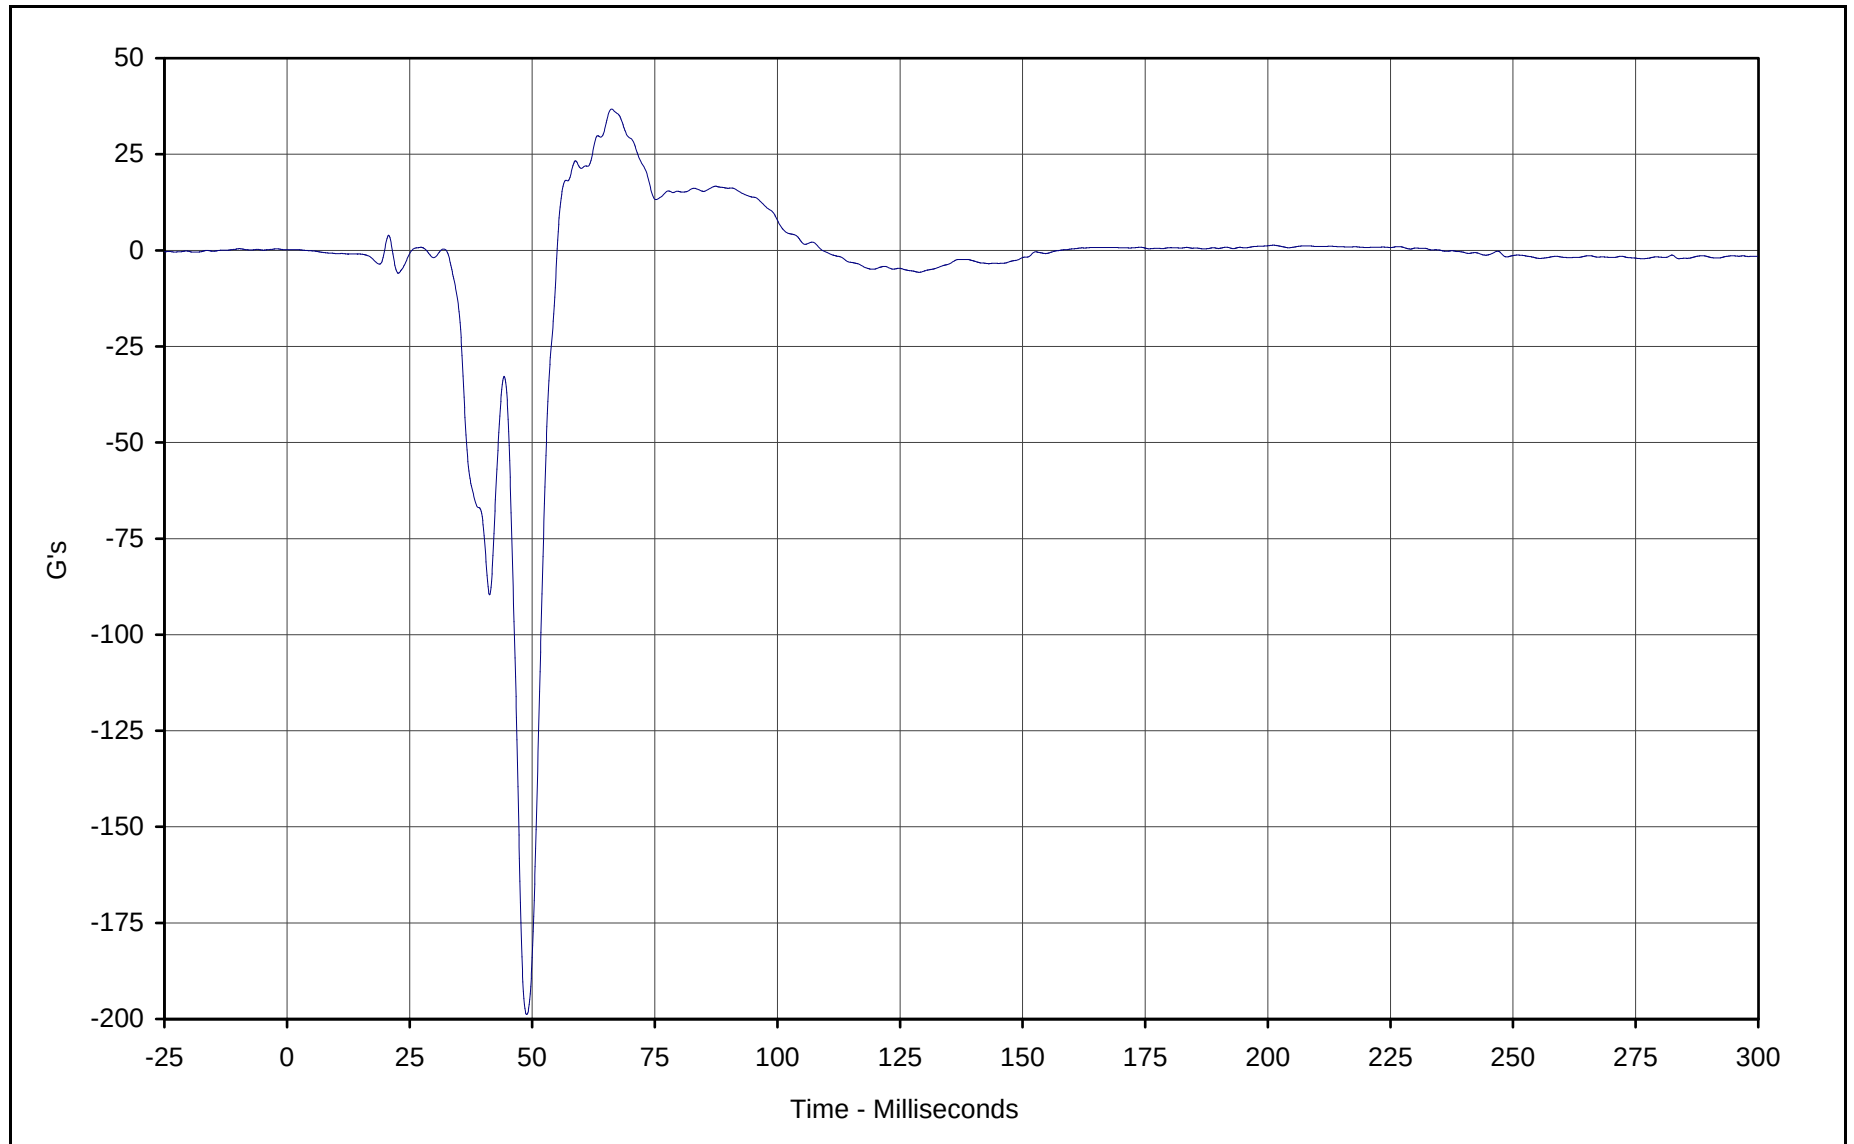


Curve Description: Driver Right Foot Aft X
Maximum Value: 36.8 at 66.2 Milliseconds
Minimum Value: -198.8 at 48.9 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: FIL-038

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup




KAR21001-10

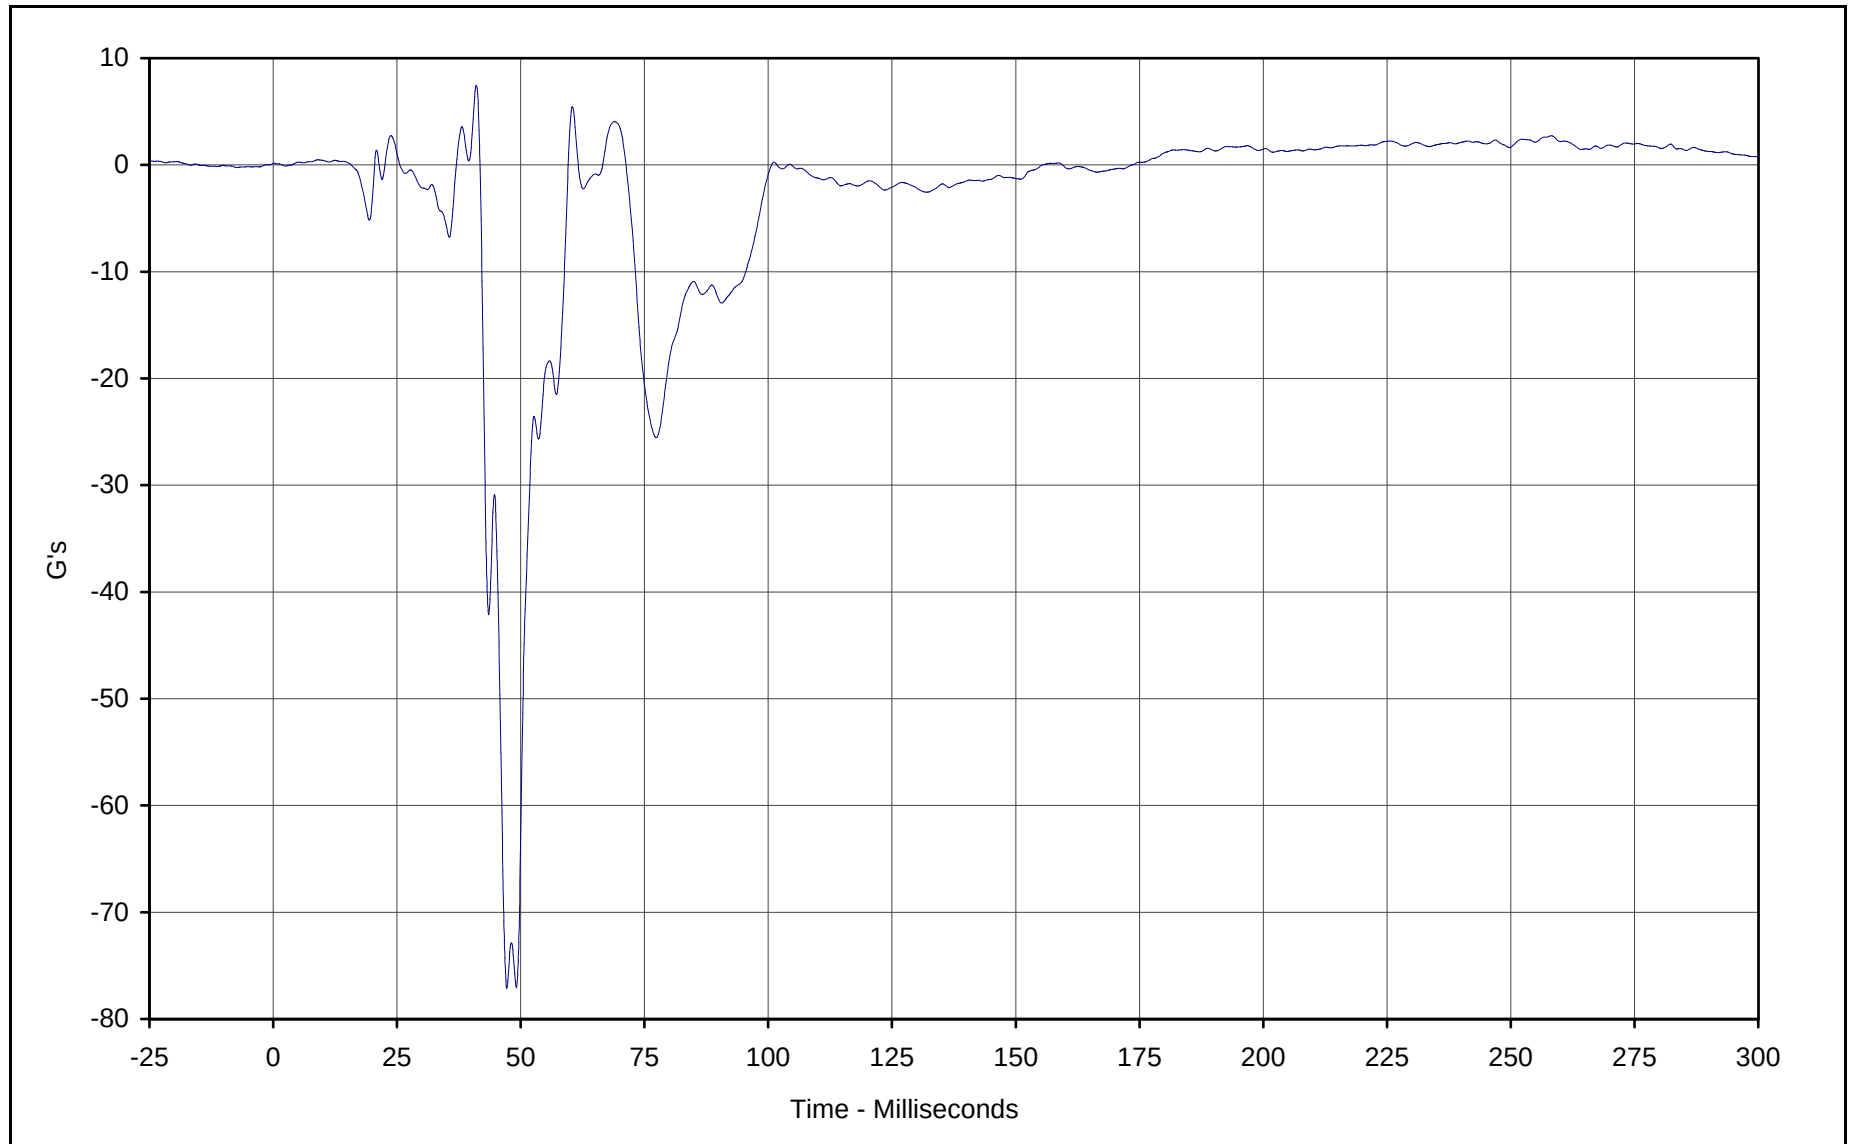

Curve Description: Driver Right Foot Aft Z
Maximum Value: 7.5 at 41.0 Milliseconds
Minimum Value: -77.1 at 47.2 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: FIL-039

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



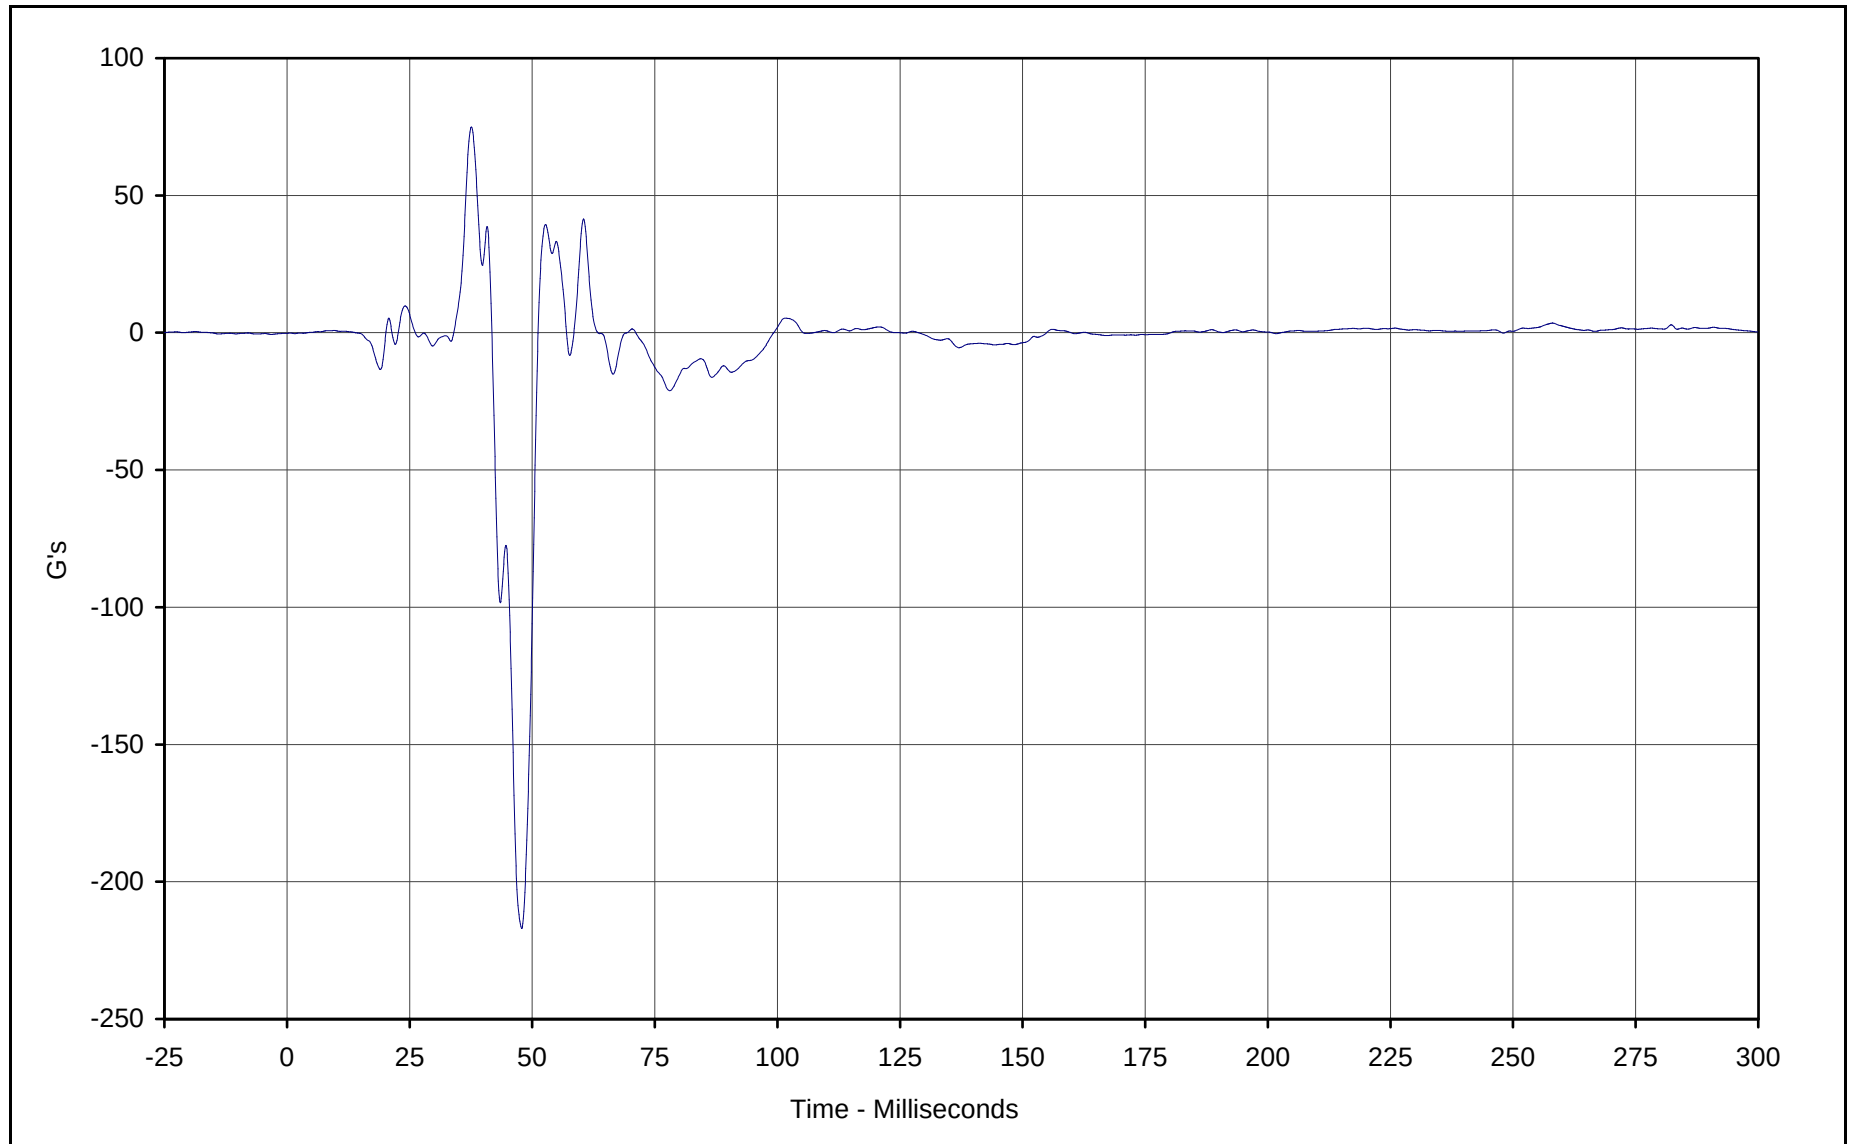


Curve Description: Driver Right Foot Fore Z
Maximum Value: 75.0 at 37.6 Milliseconds
Minimum Value: -217.0 at 47.9 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: FIL-040

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-58

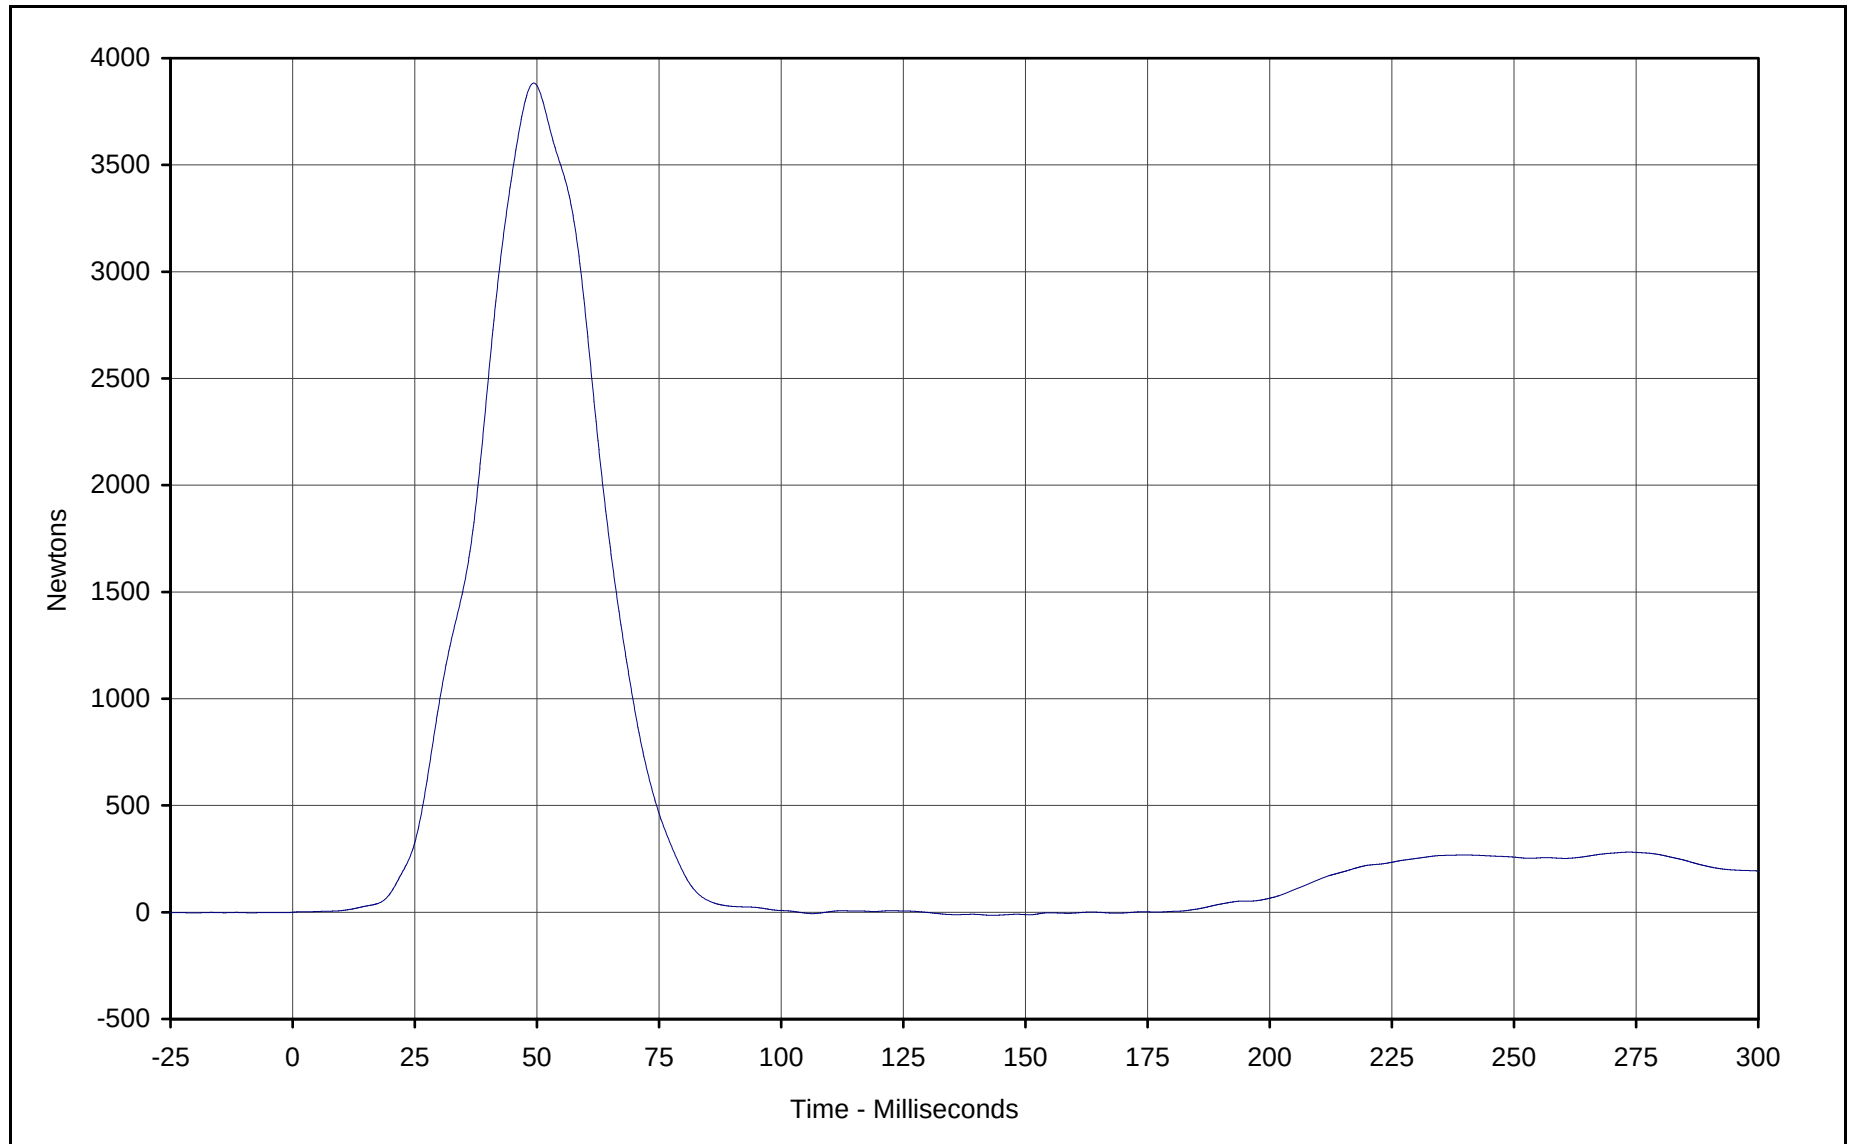


Curve Description: Driver Lap Belt Force
Maximum Value: 3883.4 at 49.3 Milliseconds
Minimum Value: -14.3 at 143.2 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-041

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-59

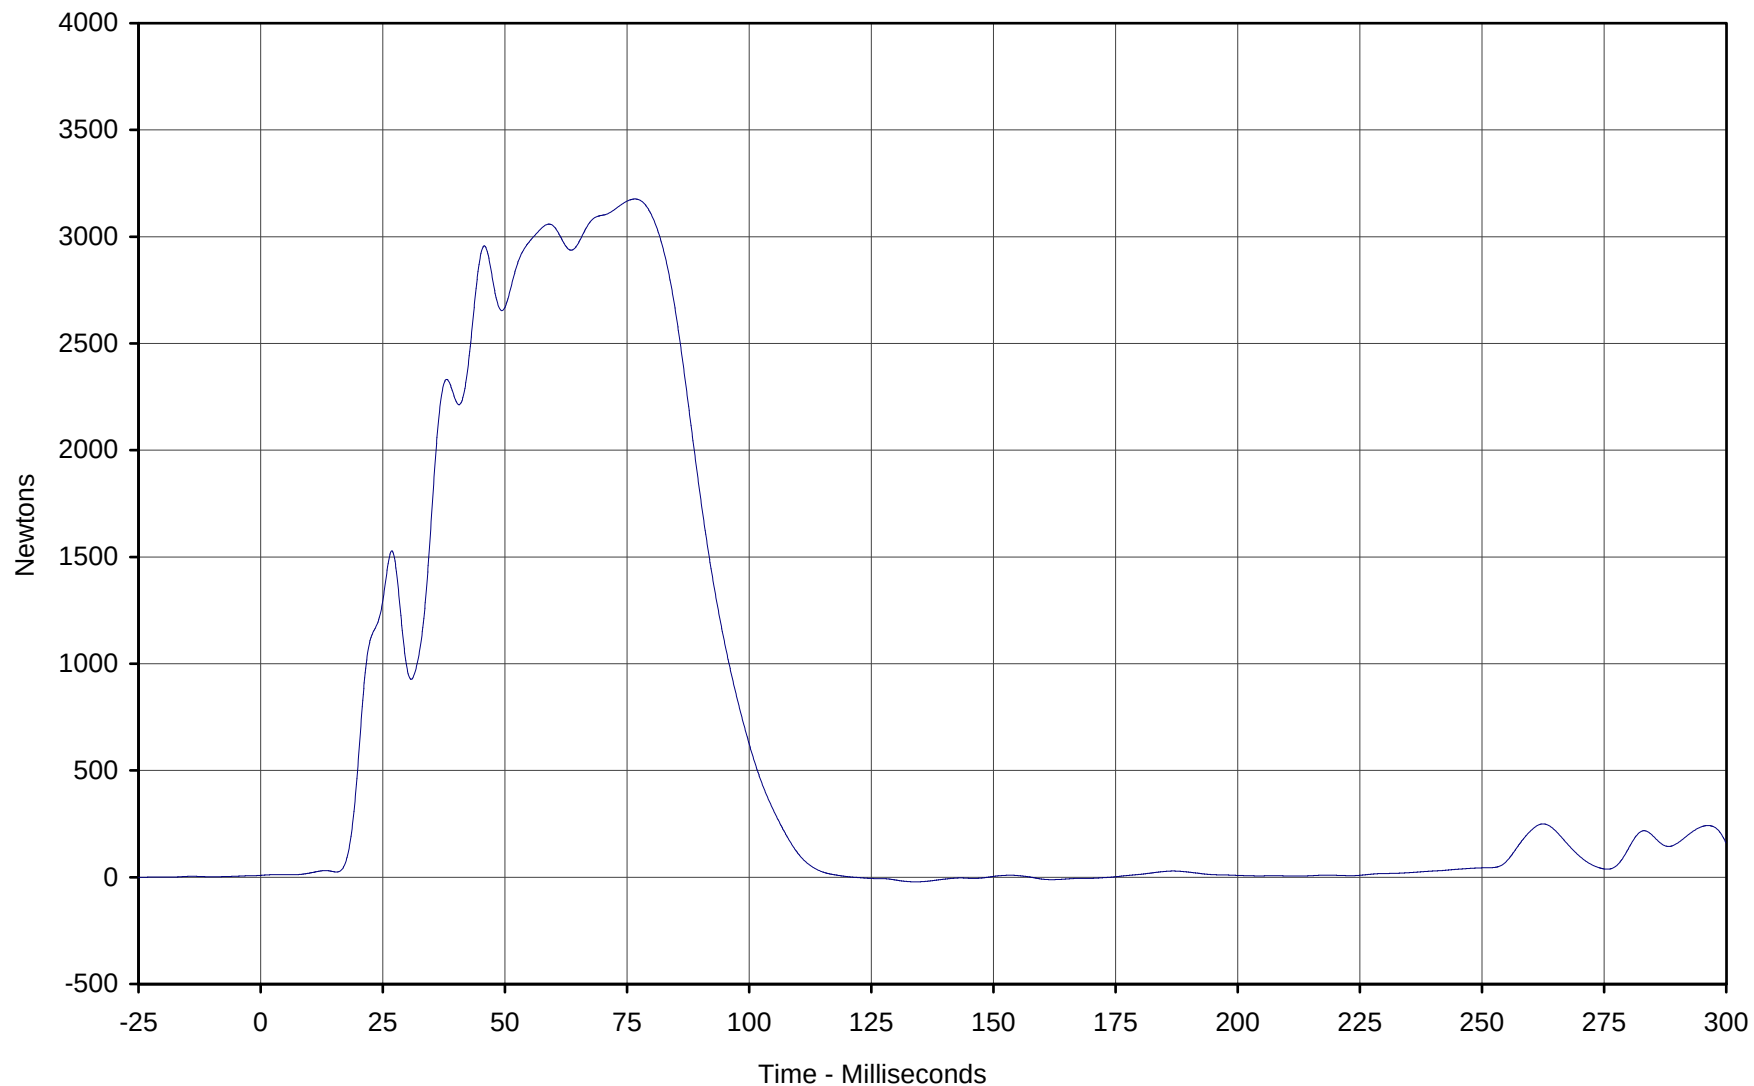


Curve Description: Driver Shoulder Belt Force
Maximum Value: 3176.7 at 76.6 Milliseconds
Minimum Value: -21.5 at 134.1 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-042

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-60

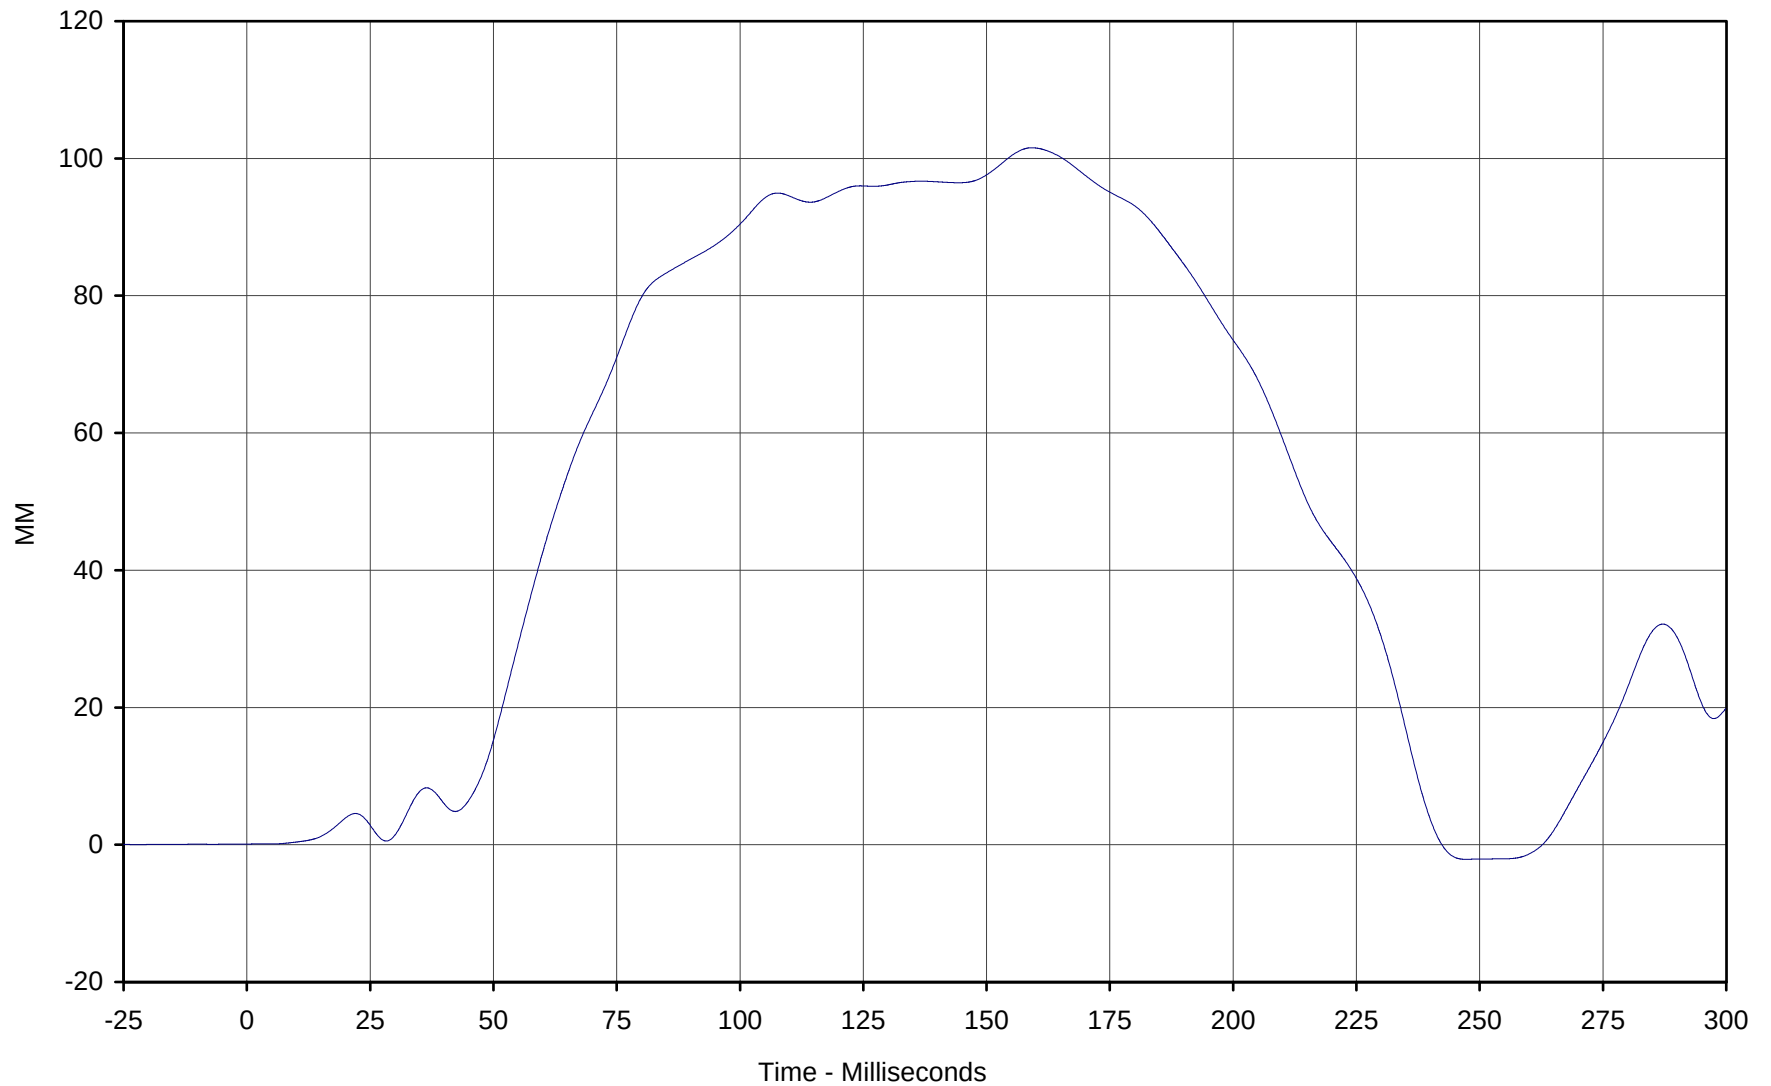


Curve Description: Driver Shoulder Belt Pullout
Maximum Value: 101.6 at 159.2 Milliseconds
Minimum Value: -2.1 at 247.2 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-043

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

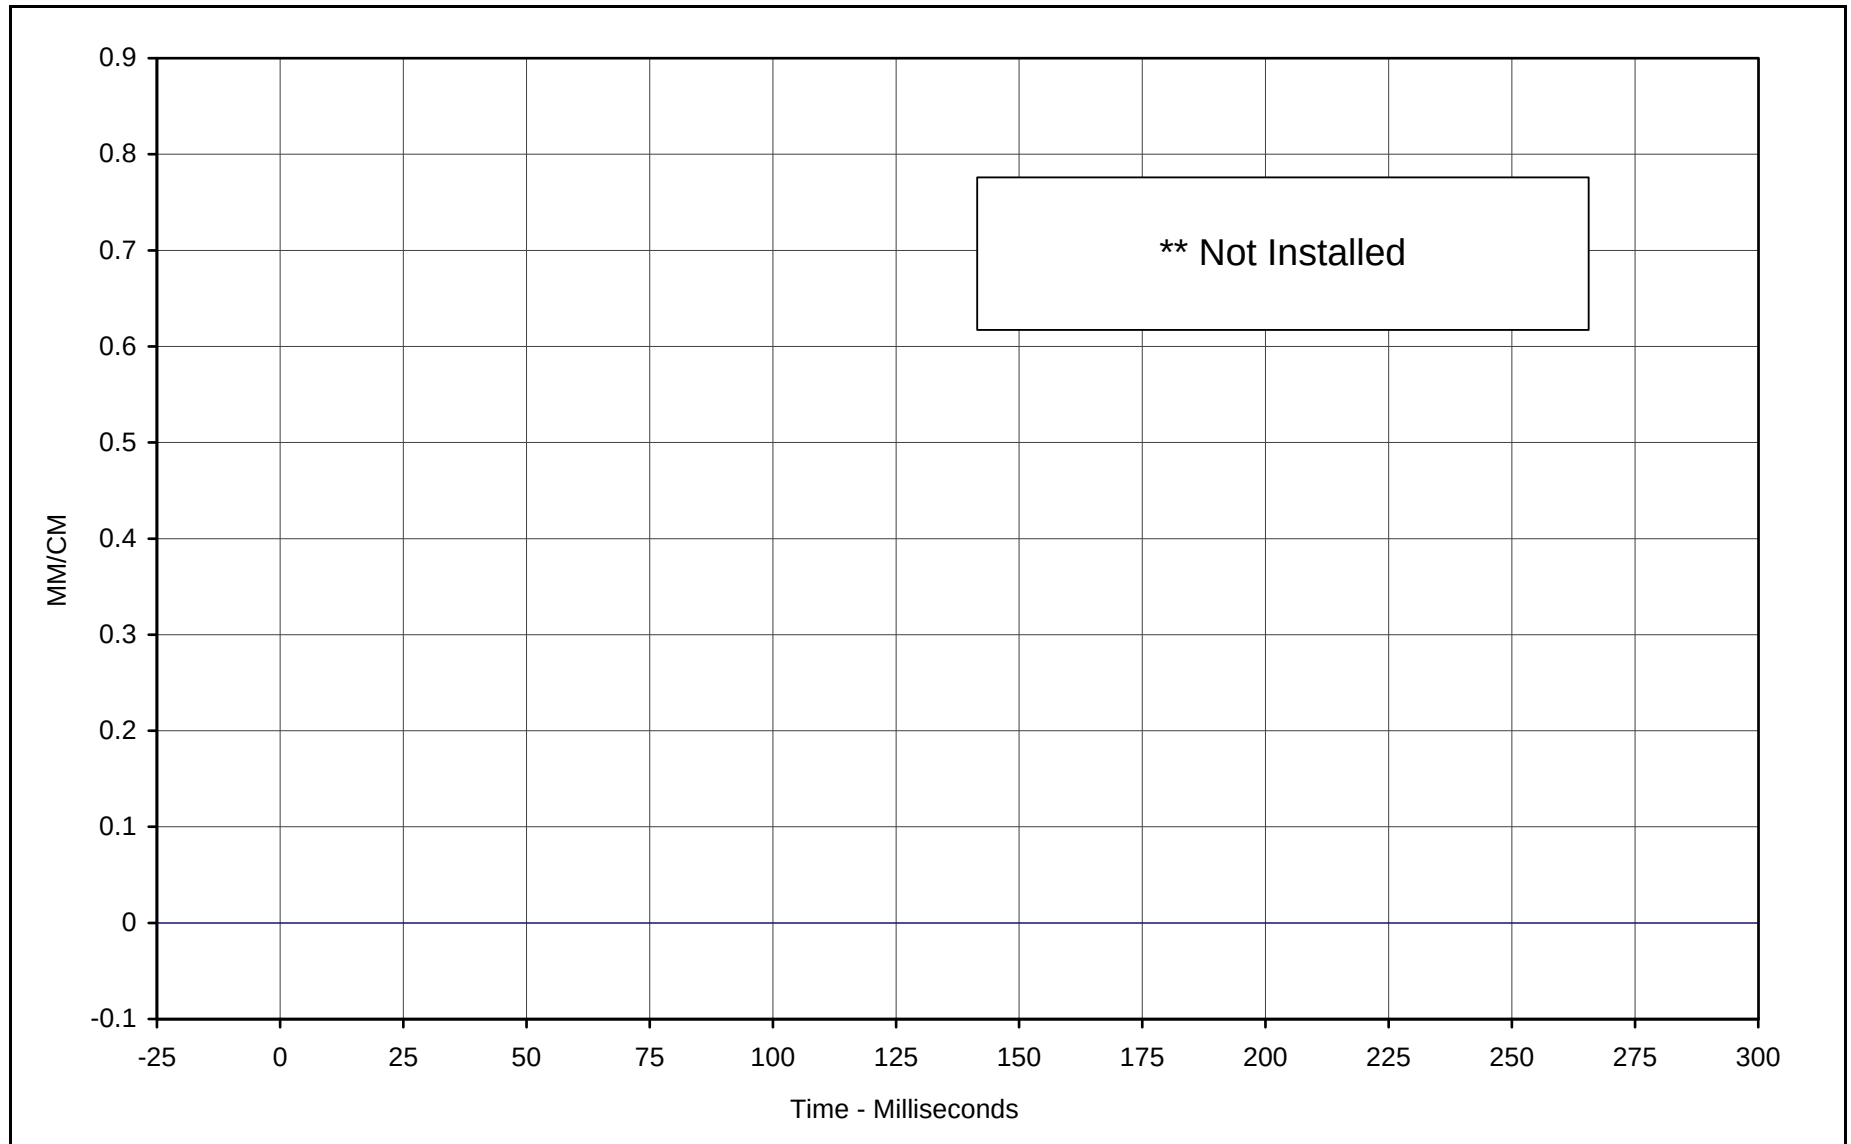

Curve Description: Driver Shoulder Belt Elongation **

Maximum Value: 0.0 at 0.0 Milliseconds

Minimum Value: 0.0 at 0.0 Milliseconds

SAE Filter Class: 60

Date of Test: 02/13/01

Curve Number: FIL-044


Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

** Not installed



B-62

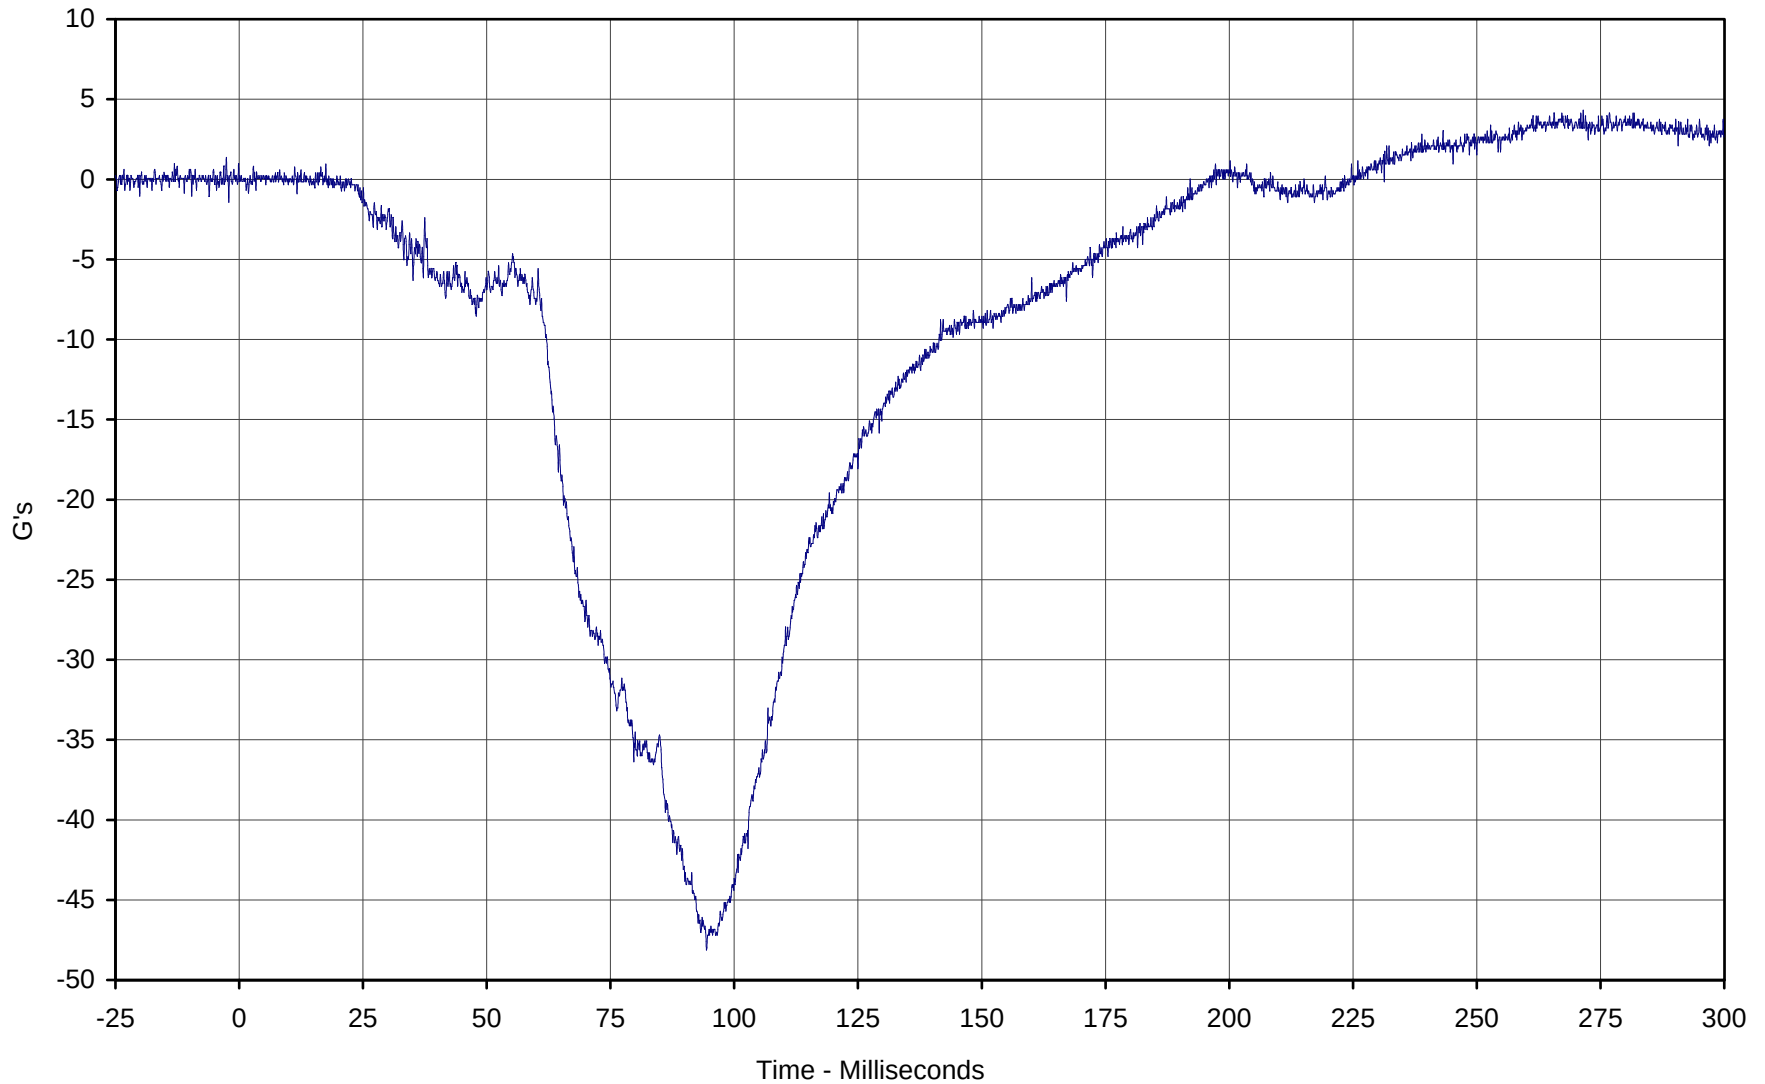


Curve Description: Passenger Head Primary X
Maximum Value: 4.3 at 271.5 Milliseconds
Minimum Value: -48.1 at 94.4 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: FIL-045

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-63

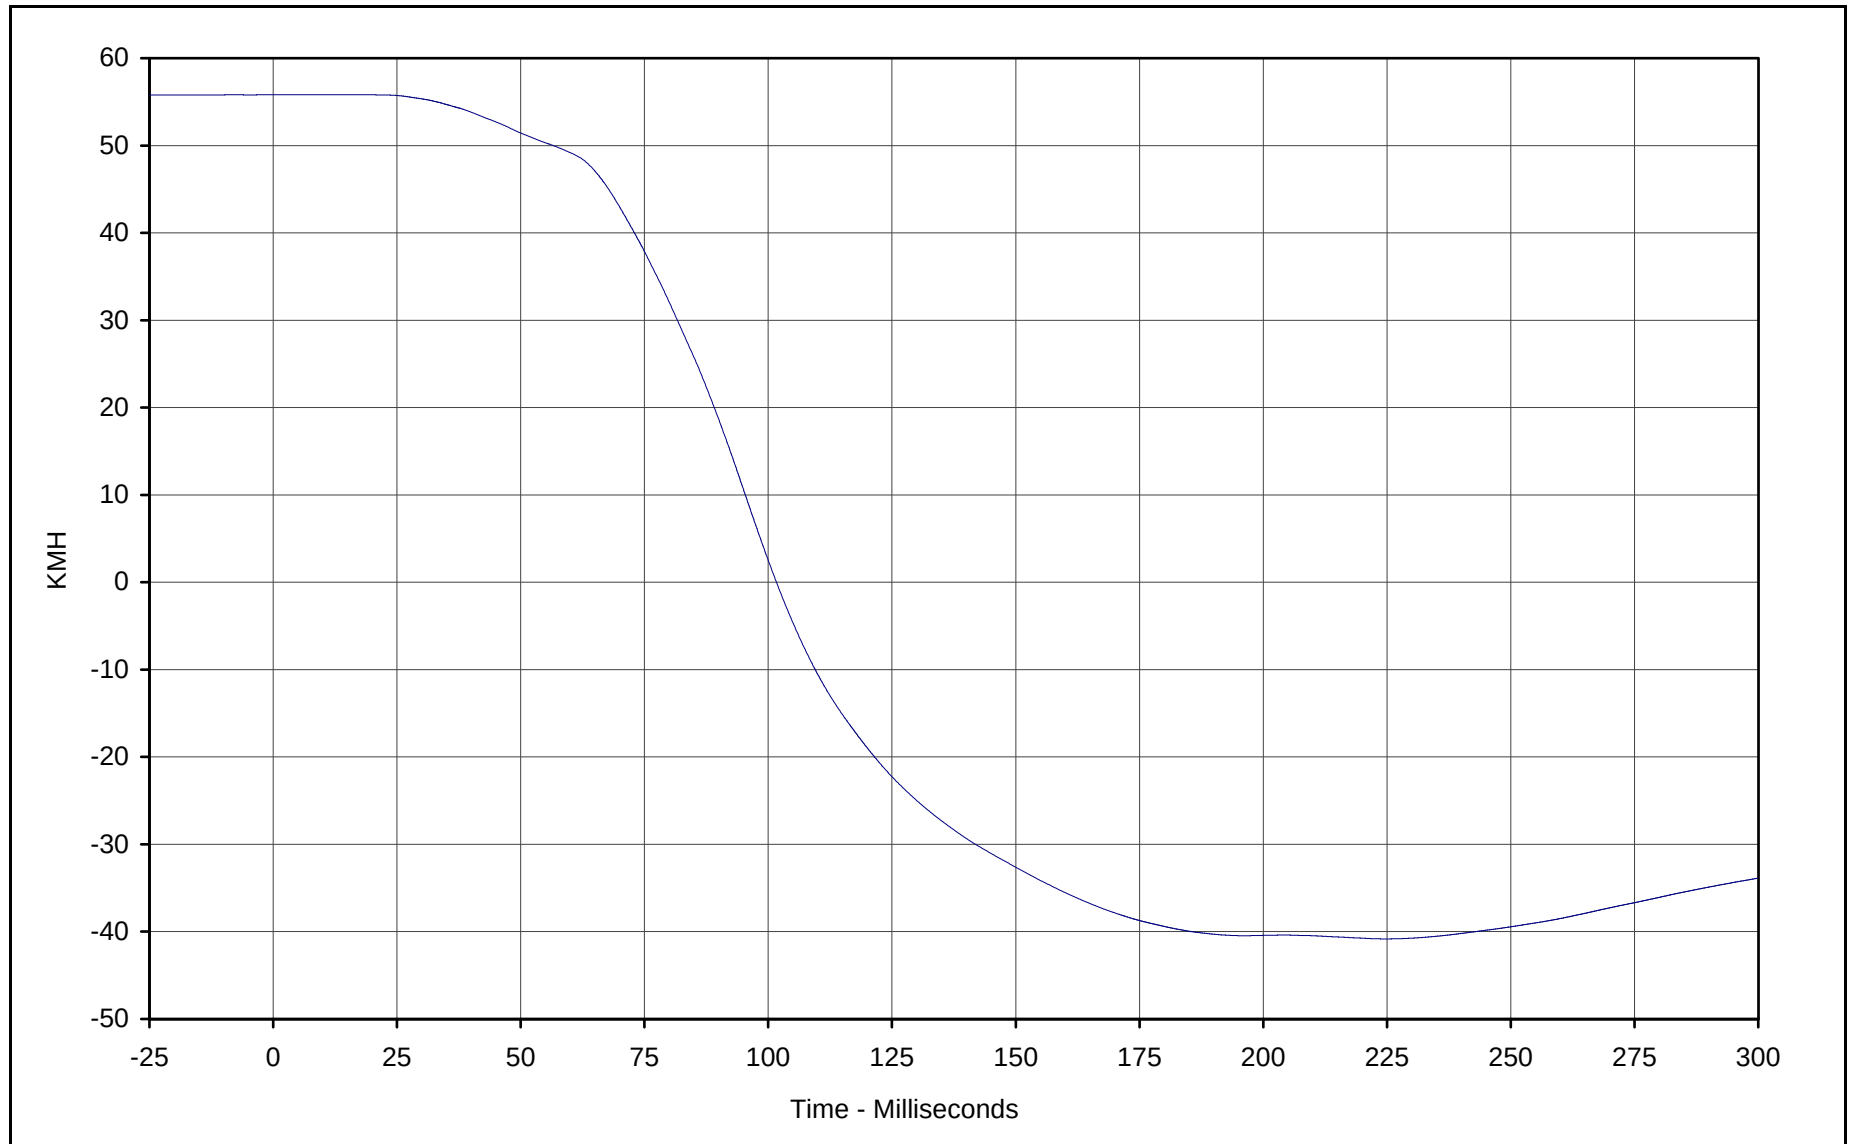

Curve Description: Passenger Head Primary X Velocity

Maximum Value: 55.8 at 17.6 Milliseconds

Minimum Value: -40.8 at 224.6 Milliseconds

SAE Filter Class: 180

Date of Test: 02/13/01

Curve Number: IN1-045


Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-64

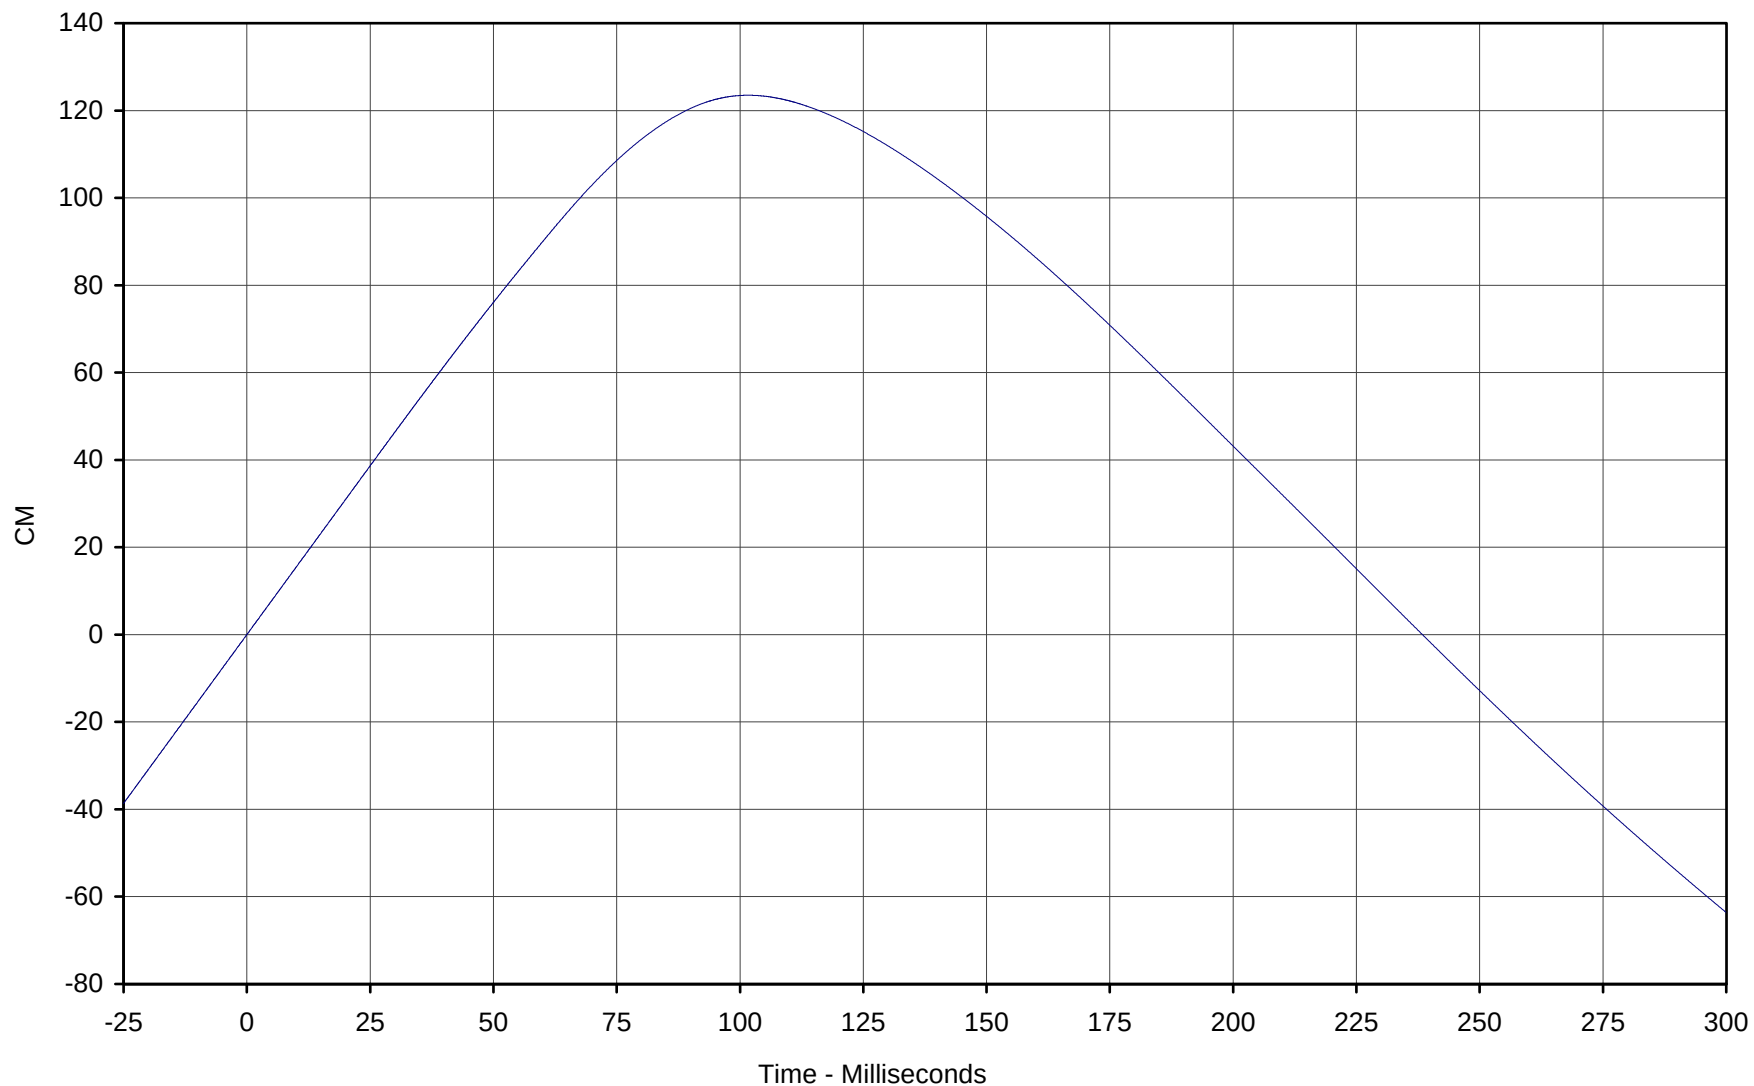


Curve Description: Passenger Head Primary X Displ.
Maximum Value: 123.5 at 101.7 Milliseconds
Minimum Value: -63.5 at 299.9 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: IN2-045

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-65

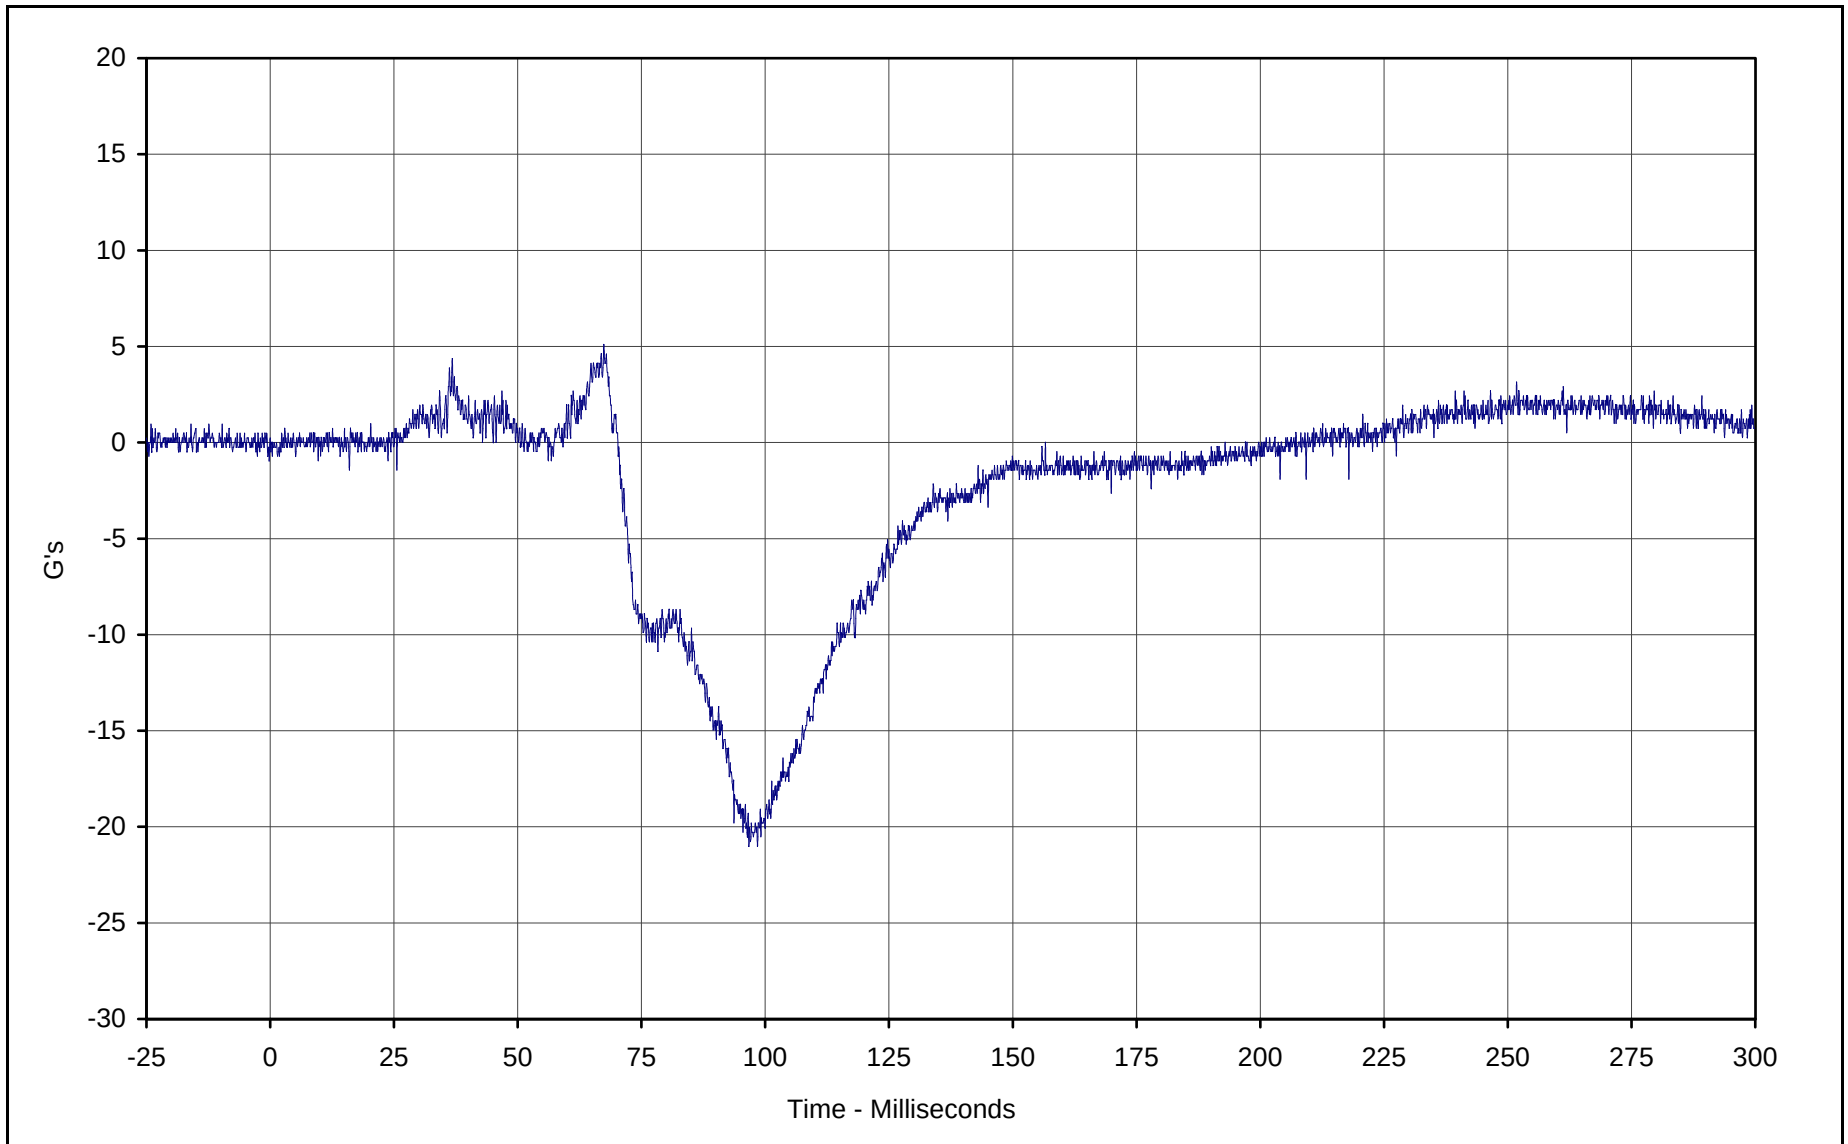


Curve Description: Passenger Head Primary Y
Maximum Value: 5.1 at 67.4 Milliseconds
Minimum Value: -21.0 at 96.7 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: FIL-046

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-66

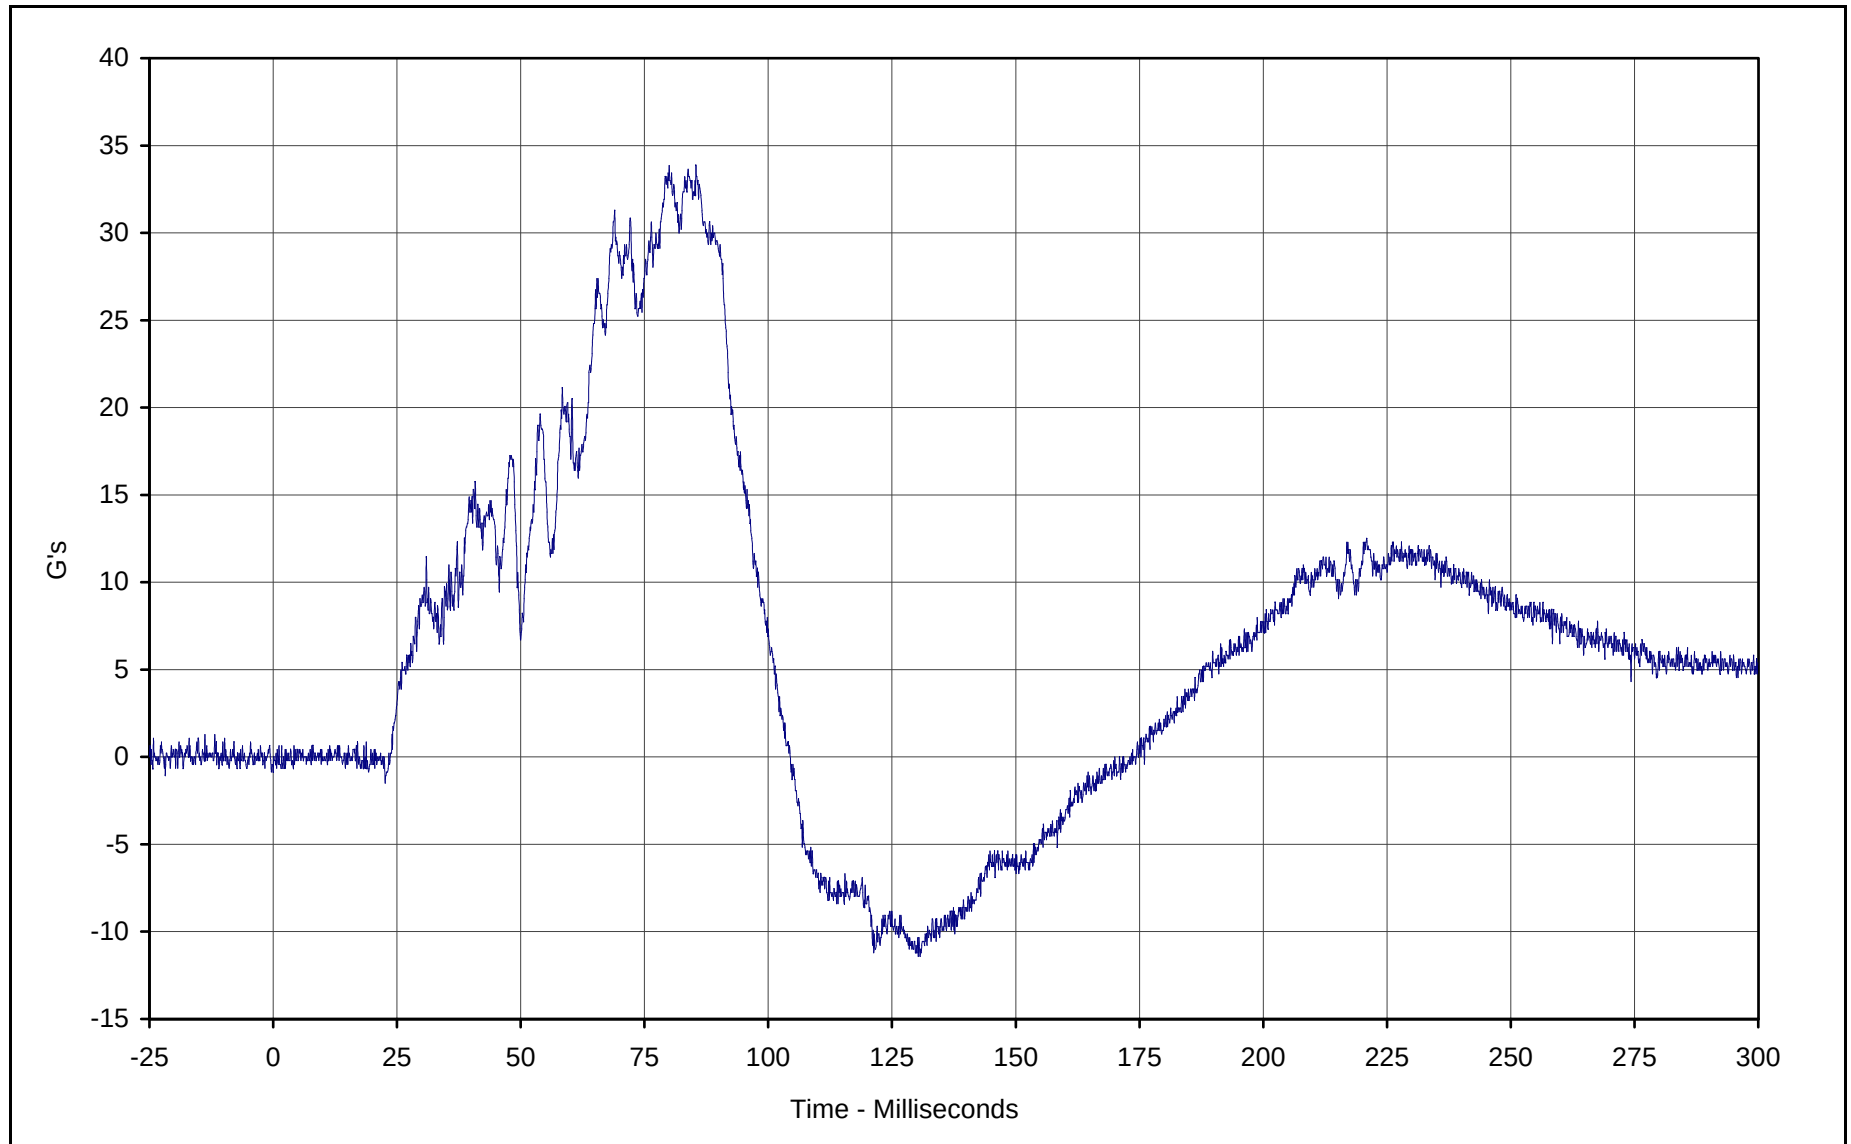


Curve Description: Passenger Head Primary Z
Maximum Value: 33.9 at 80.0 Milliseconds
Minimum Value: -11.4 at 130.3 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: FIL-047

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-67

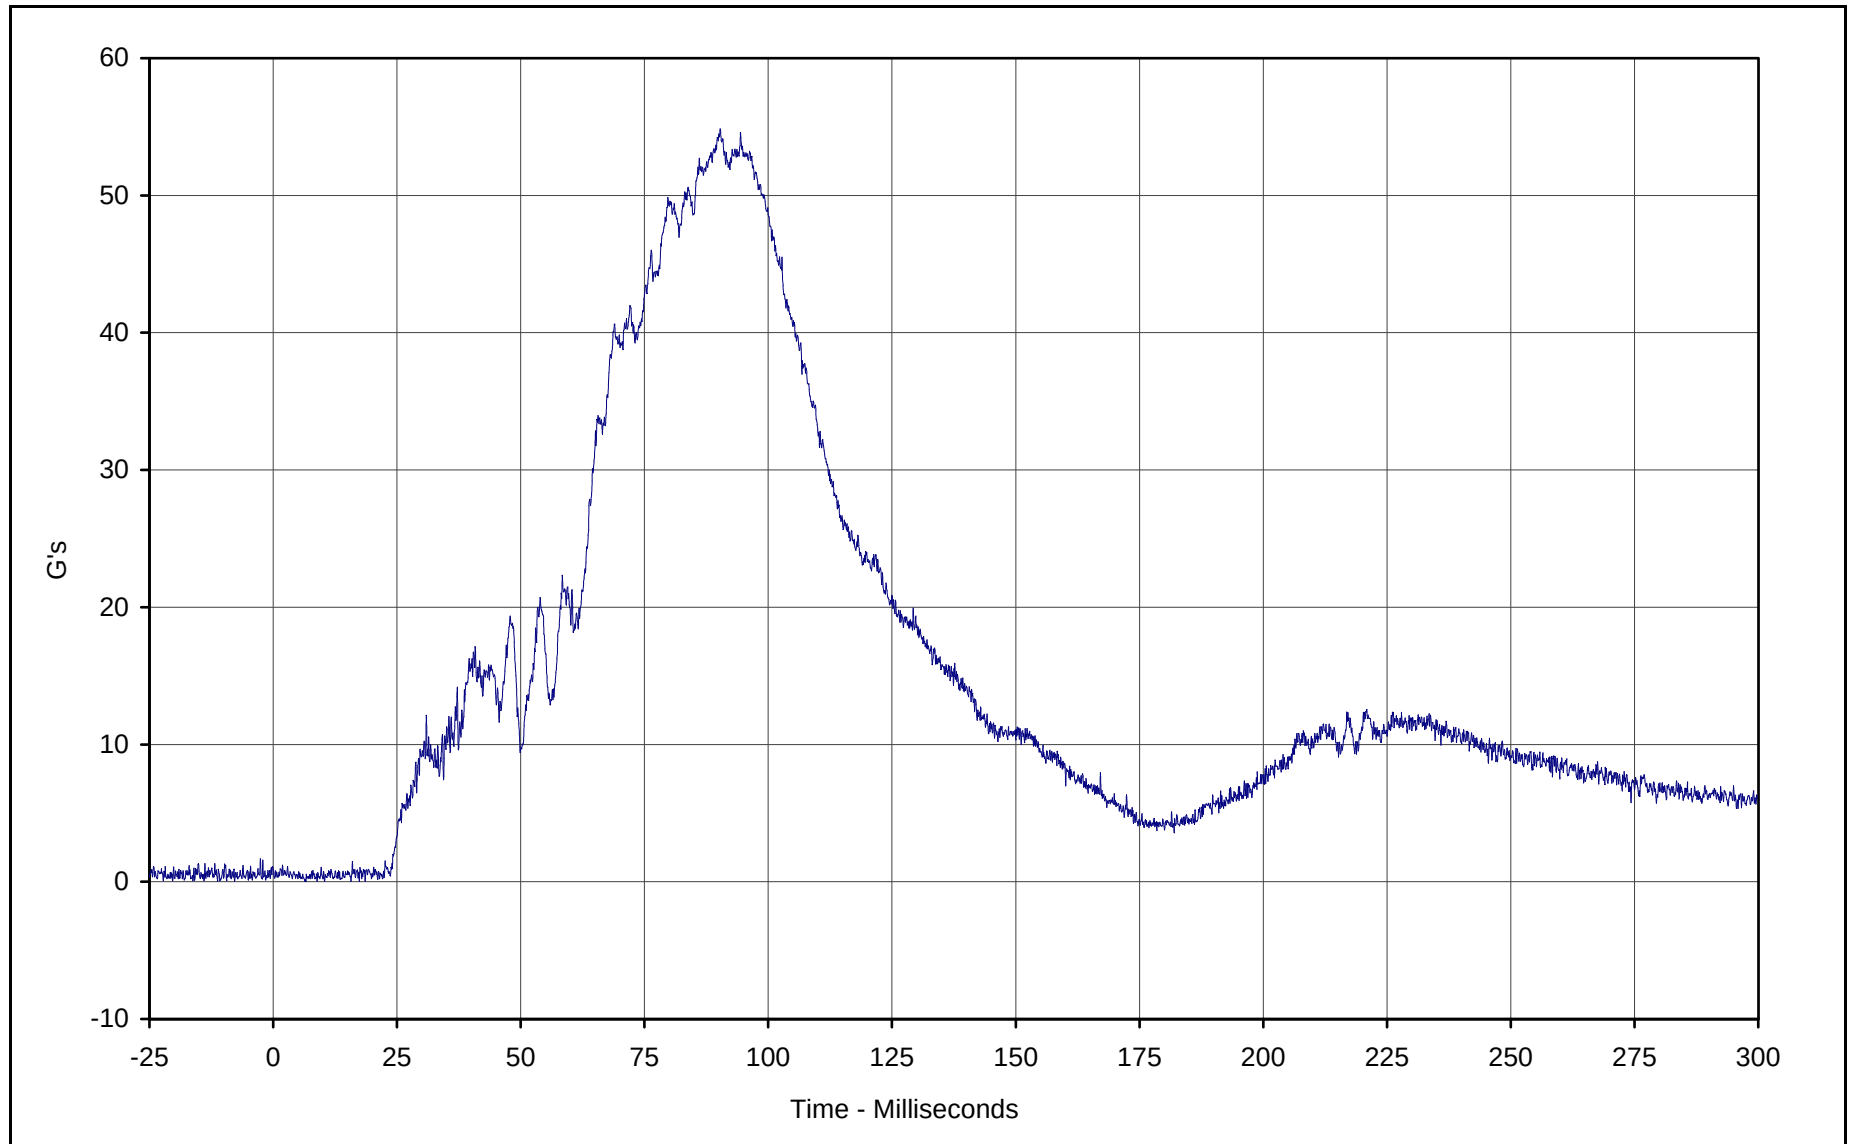


Curve Description: Passenger Head Resultant Primary
Maximum Value: 54.9 at 90.3 Milliseconds
Minimum Value: 0.0 at 6.4 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: RES-045

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-68

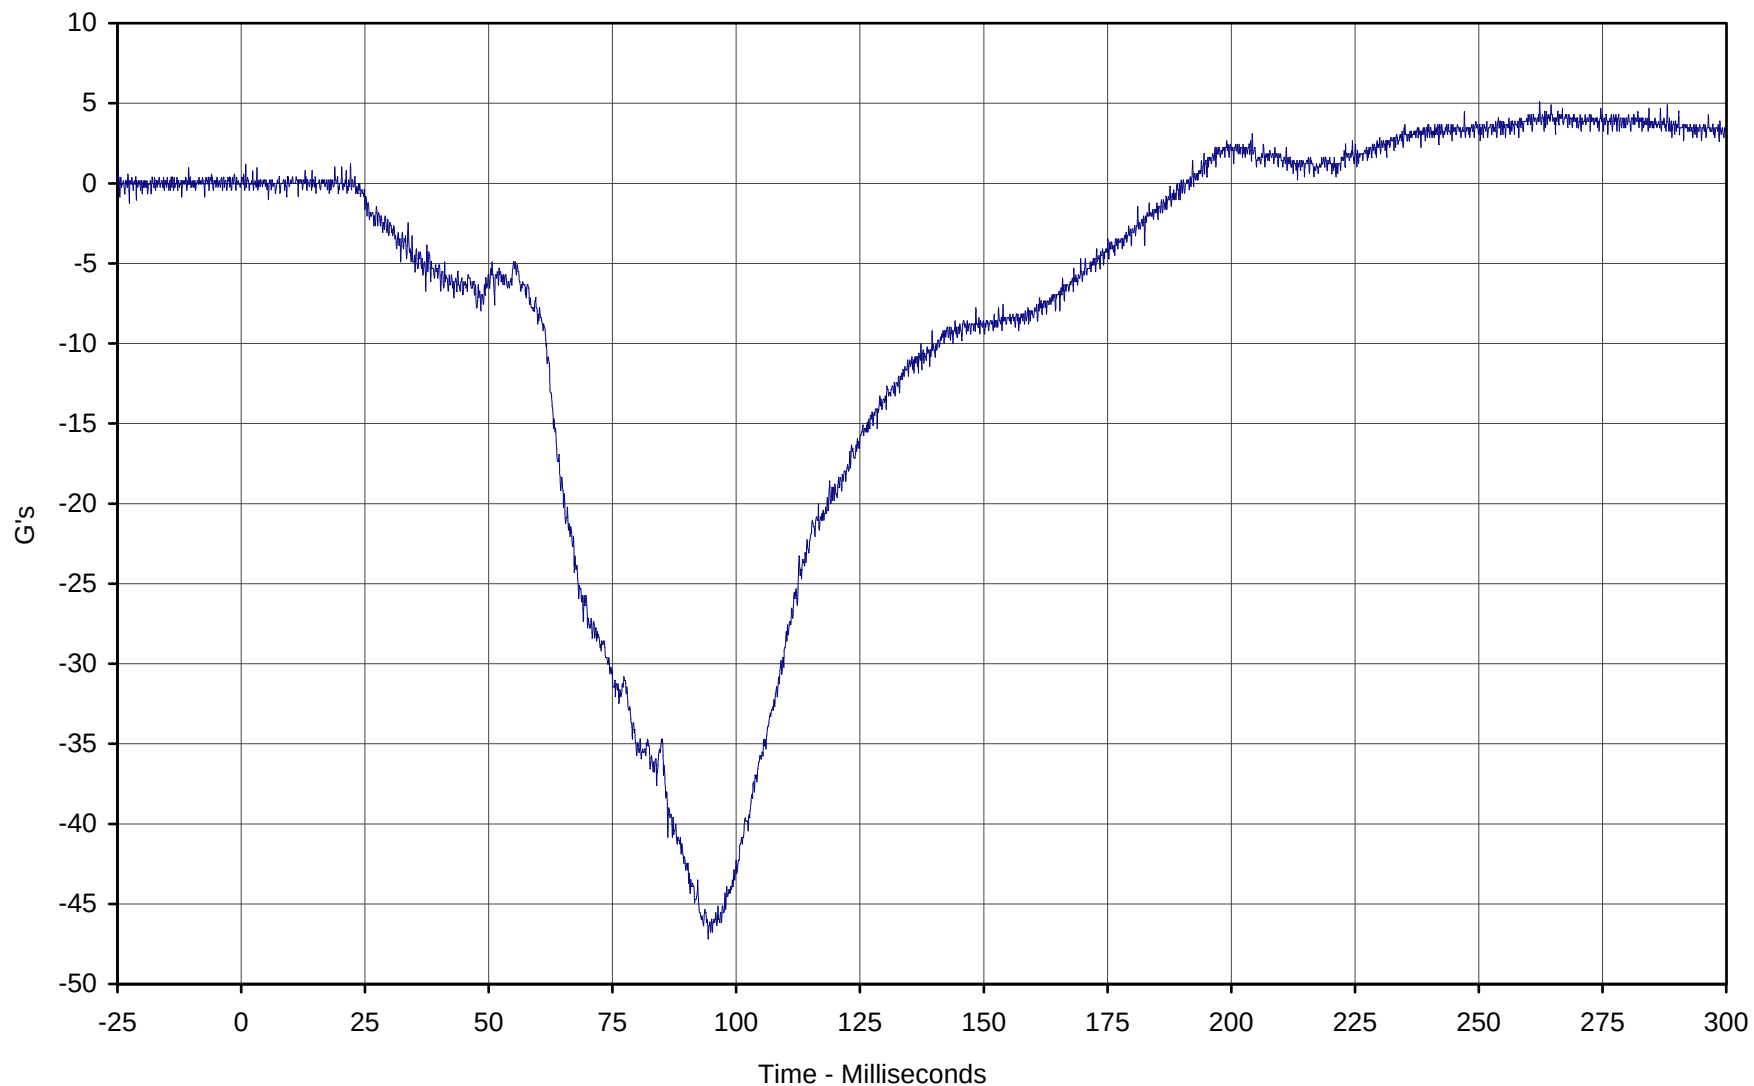


Curve Description: Passenger Head Redundant X
Maximum Value: 5.1 at 262.3 Milliseconds
Minimum Value: -47.2 at 94.3 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: FIL-048

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

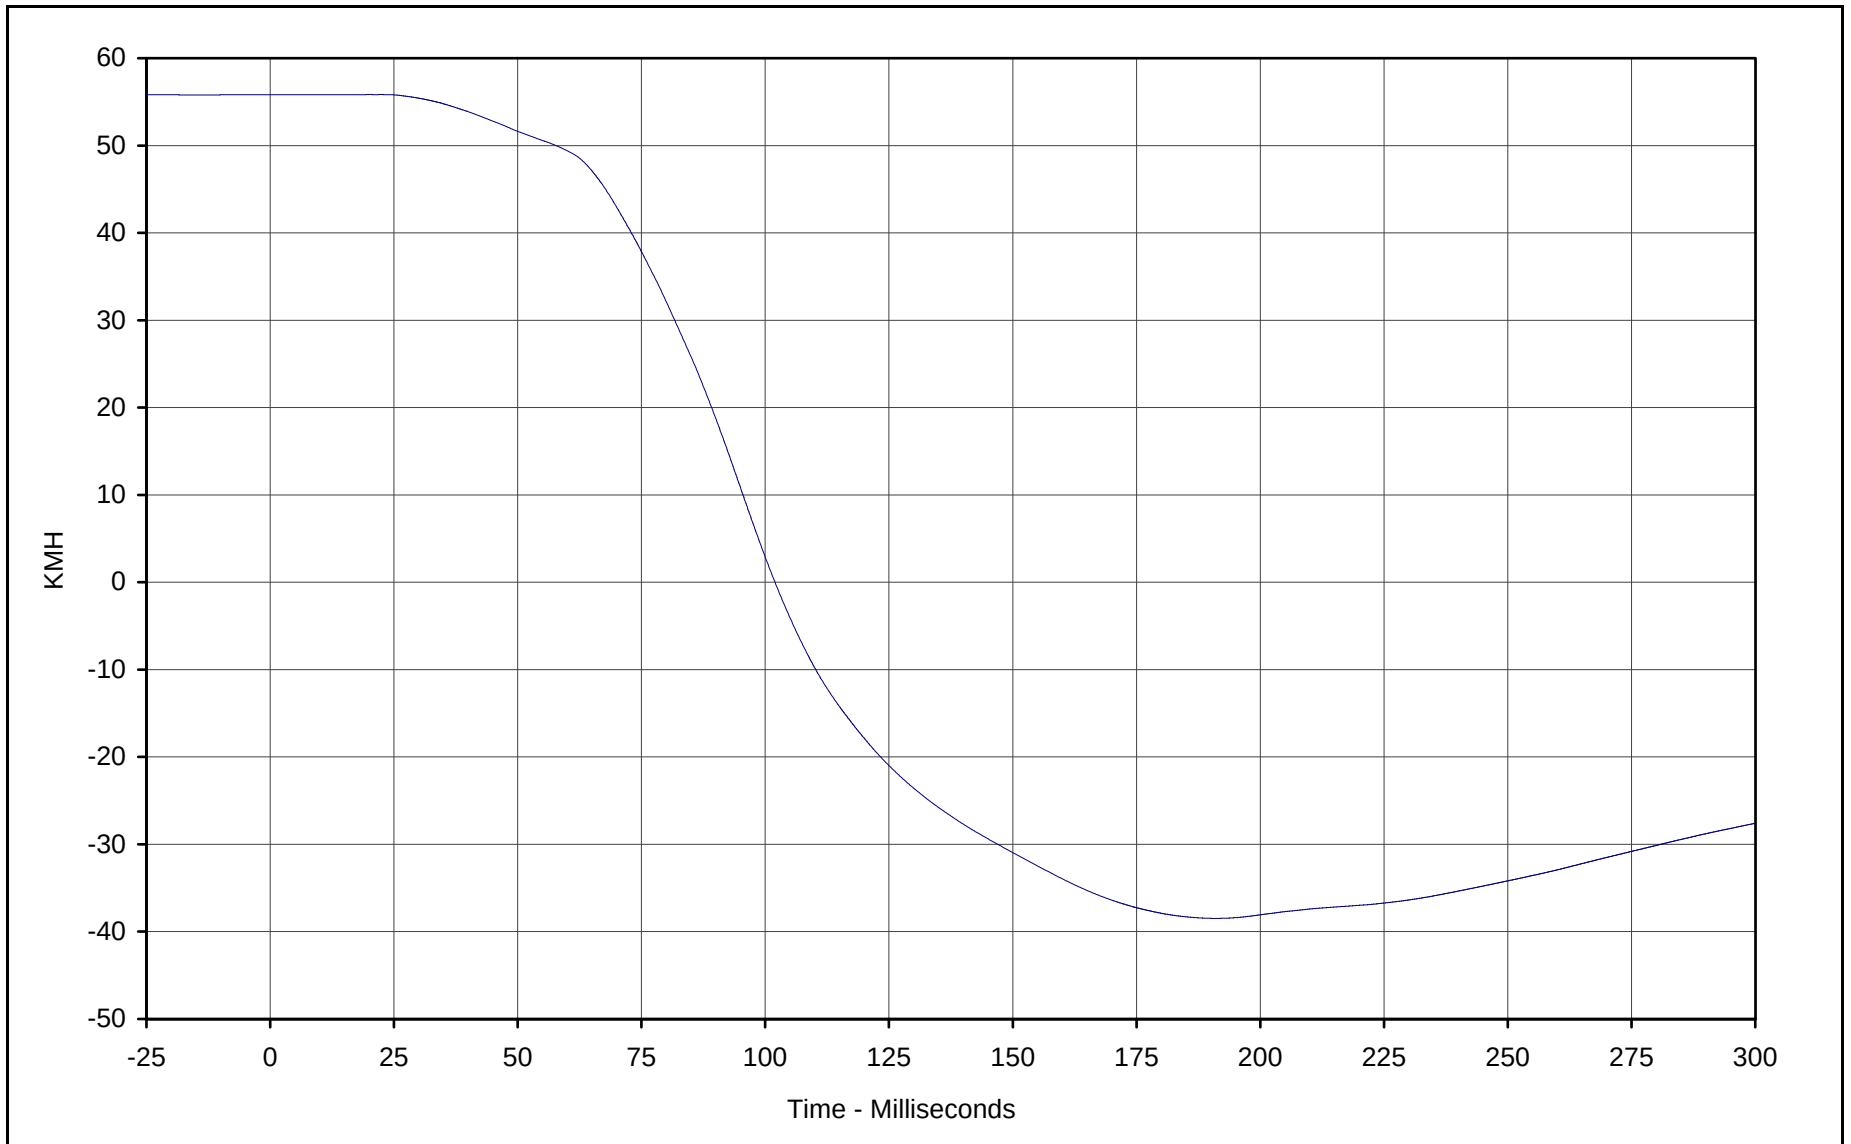

Curve Description: Passenger Head Redundant X Velocity

Maximum Value: 55.8 at 22.5 Milliseconds

Minimum Value: -38.5 at 191.0 Milliseconds

SAE Filter Class: 180

Date of Test: 02/13/01


Curve Number: IN1-048

Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-70

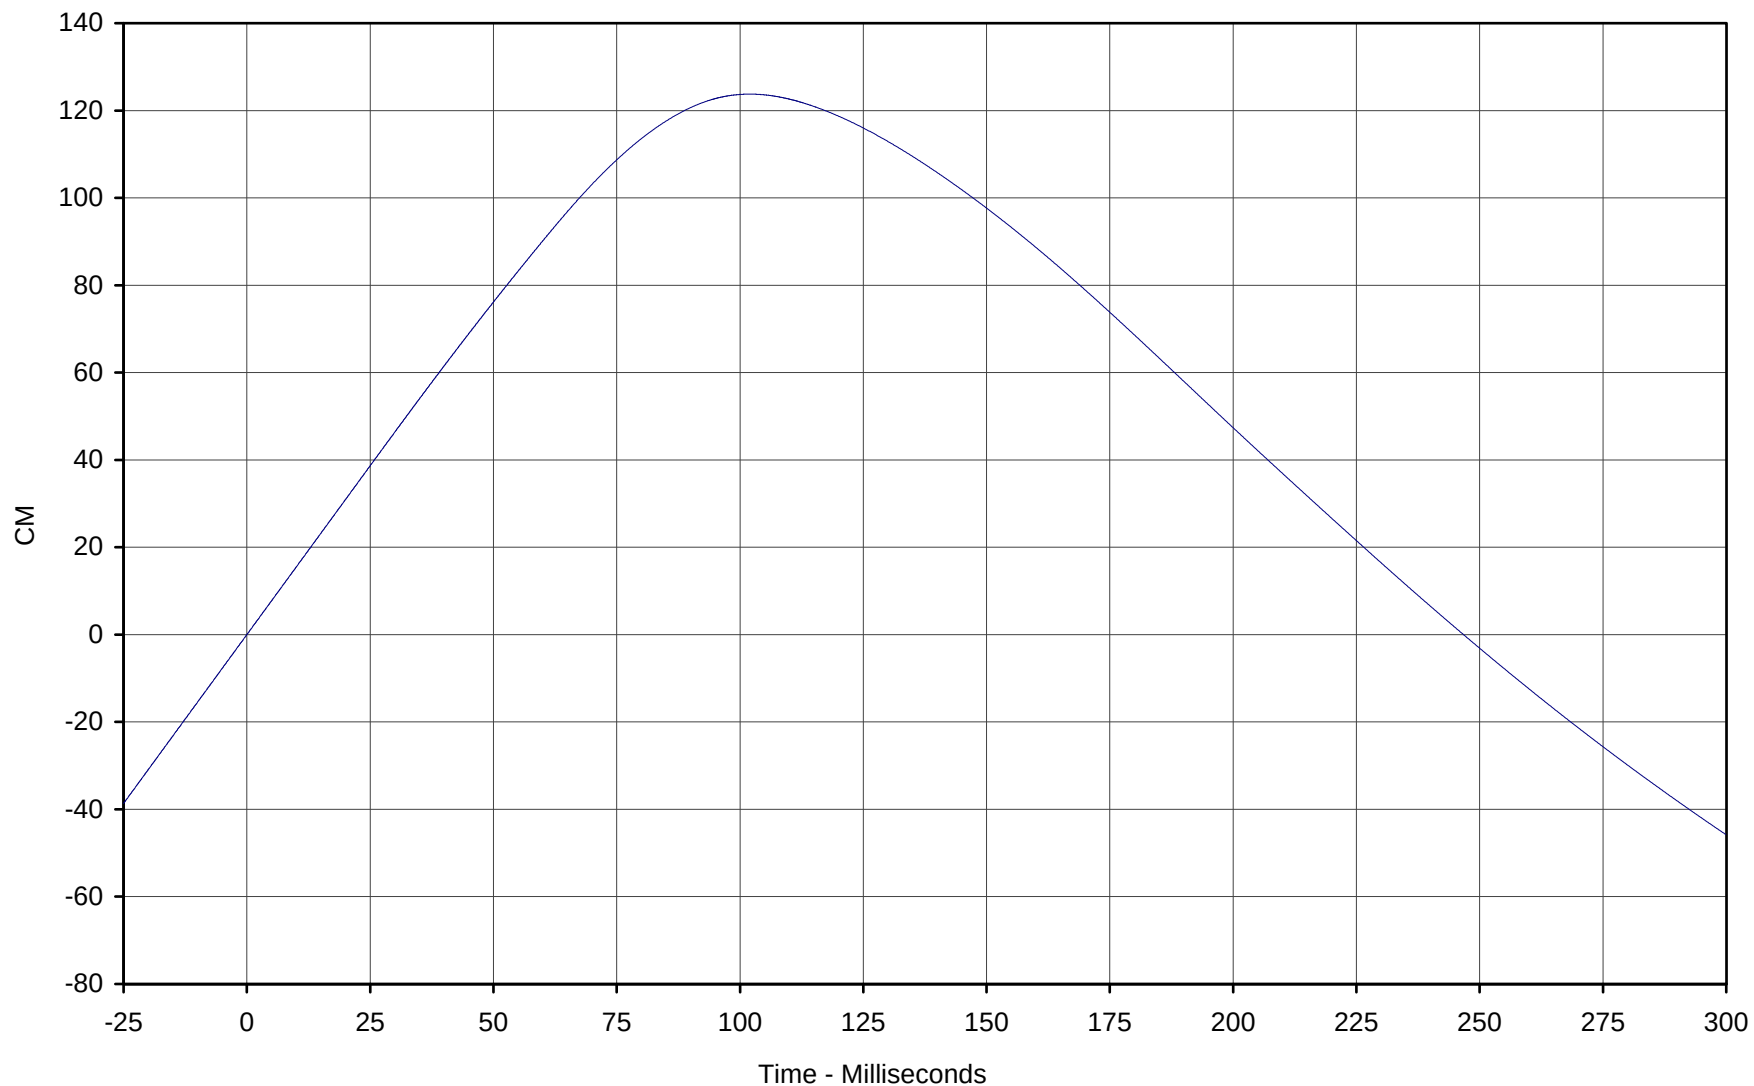

Curve Description: Passenger Head Redundant X Displ.

Maximum Value: 123.8 at 102.0 Milliseconds

Minimum Value: -45.8 at 299.9 Milliseconds

SAE Filter Class: 180

Date of Test: 02/13/01

Curve Number: IN2-048


Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-71

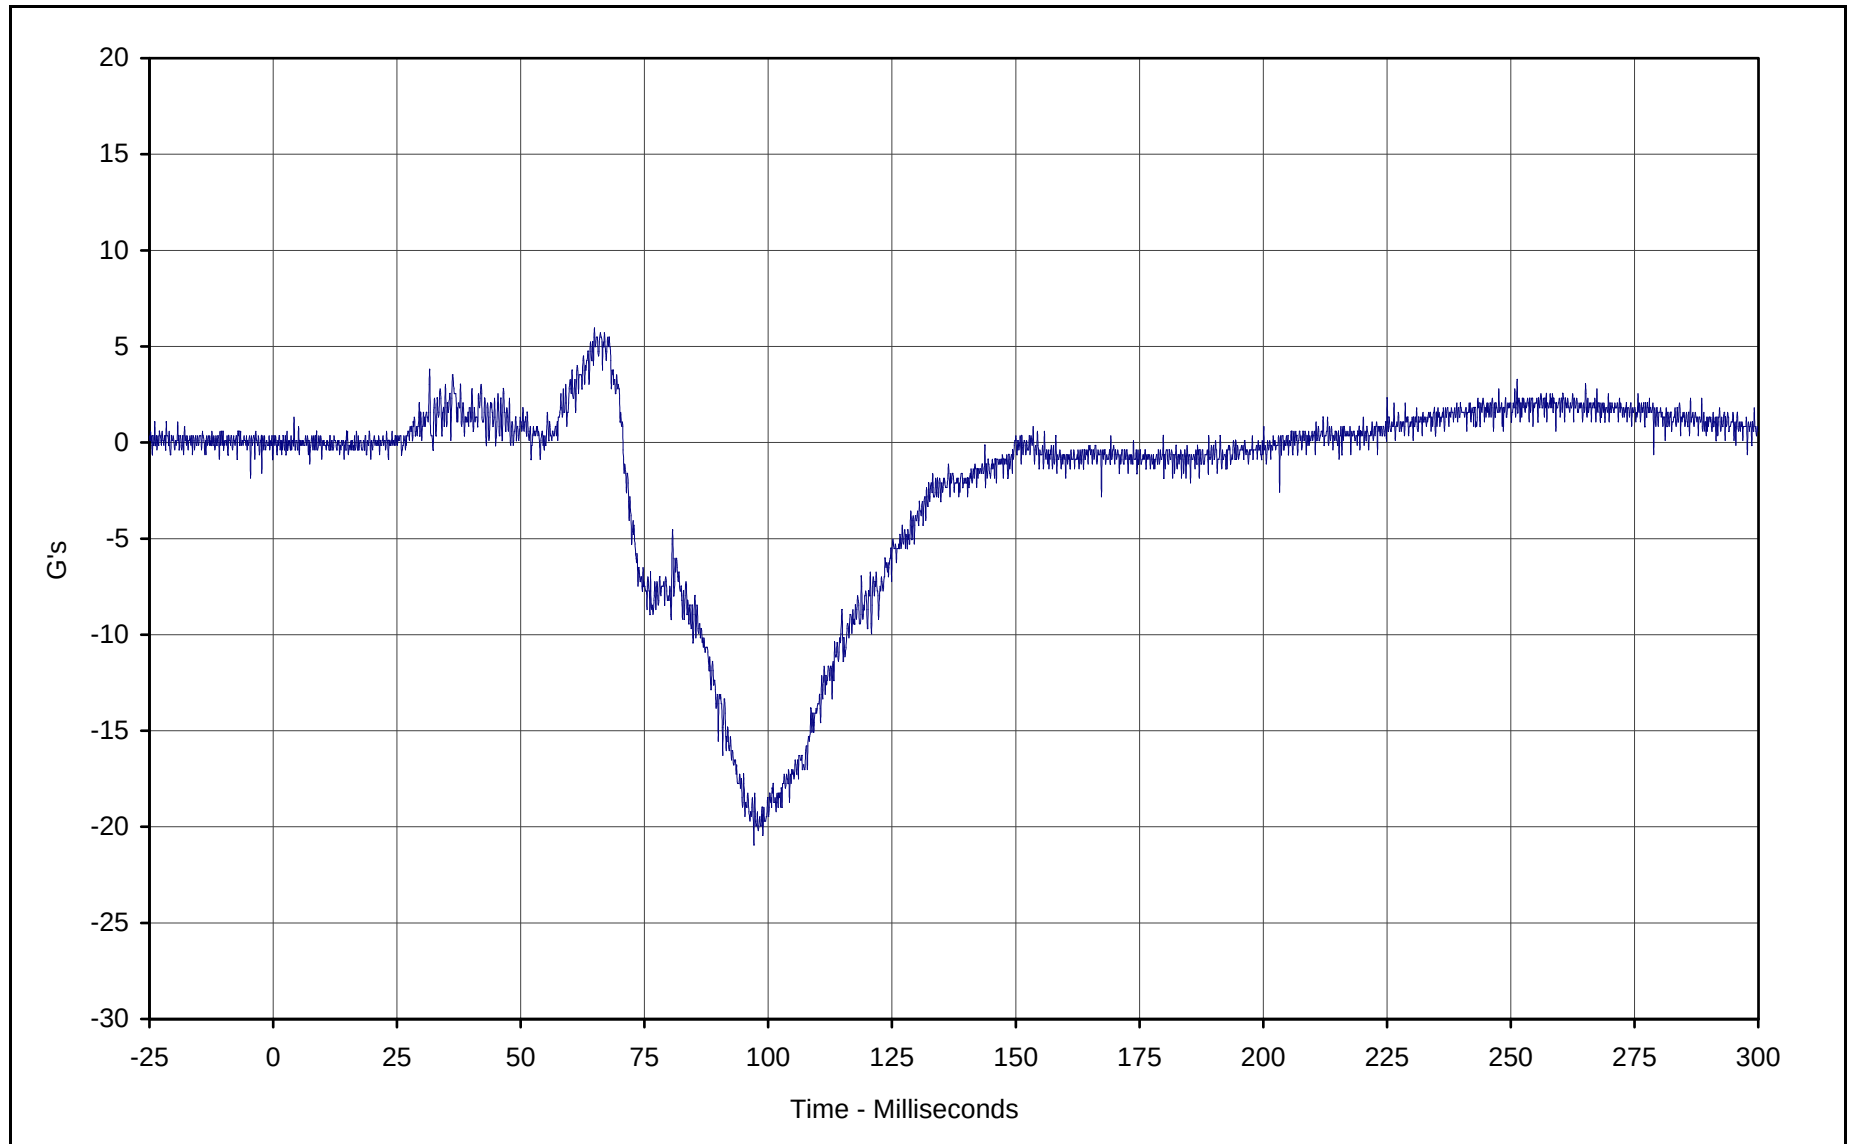


Curve Description: Passenger Head Redundant Y
Maximum Value: 6.0 at 64.9 Milliseconds
Minimum Value: -20.9 at 97.1 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: FIL-049

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-72

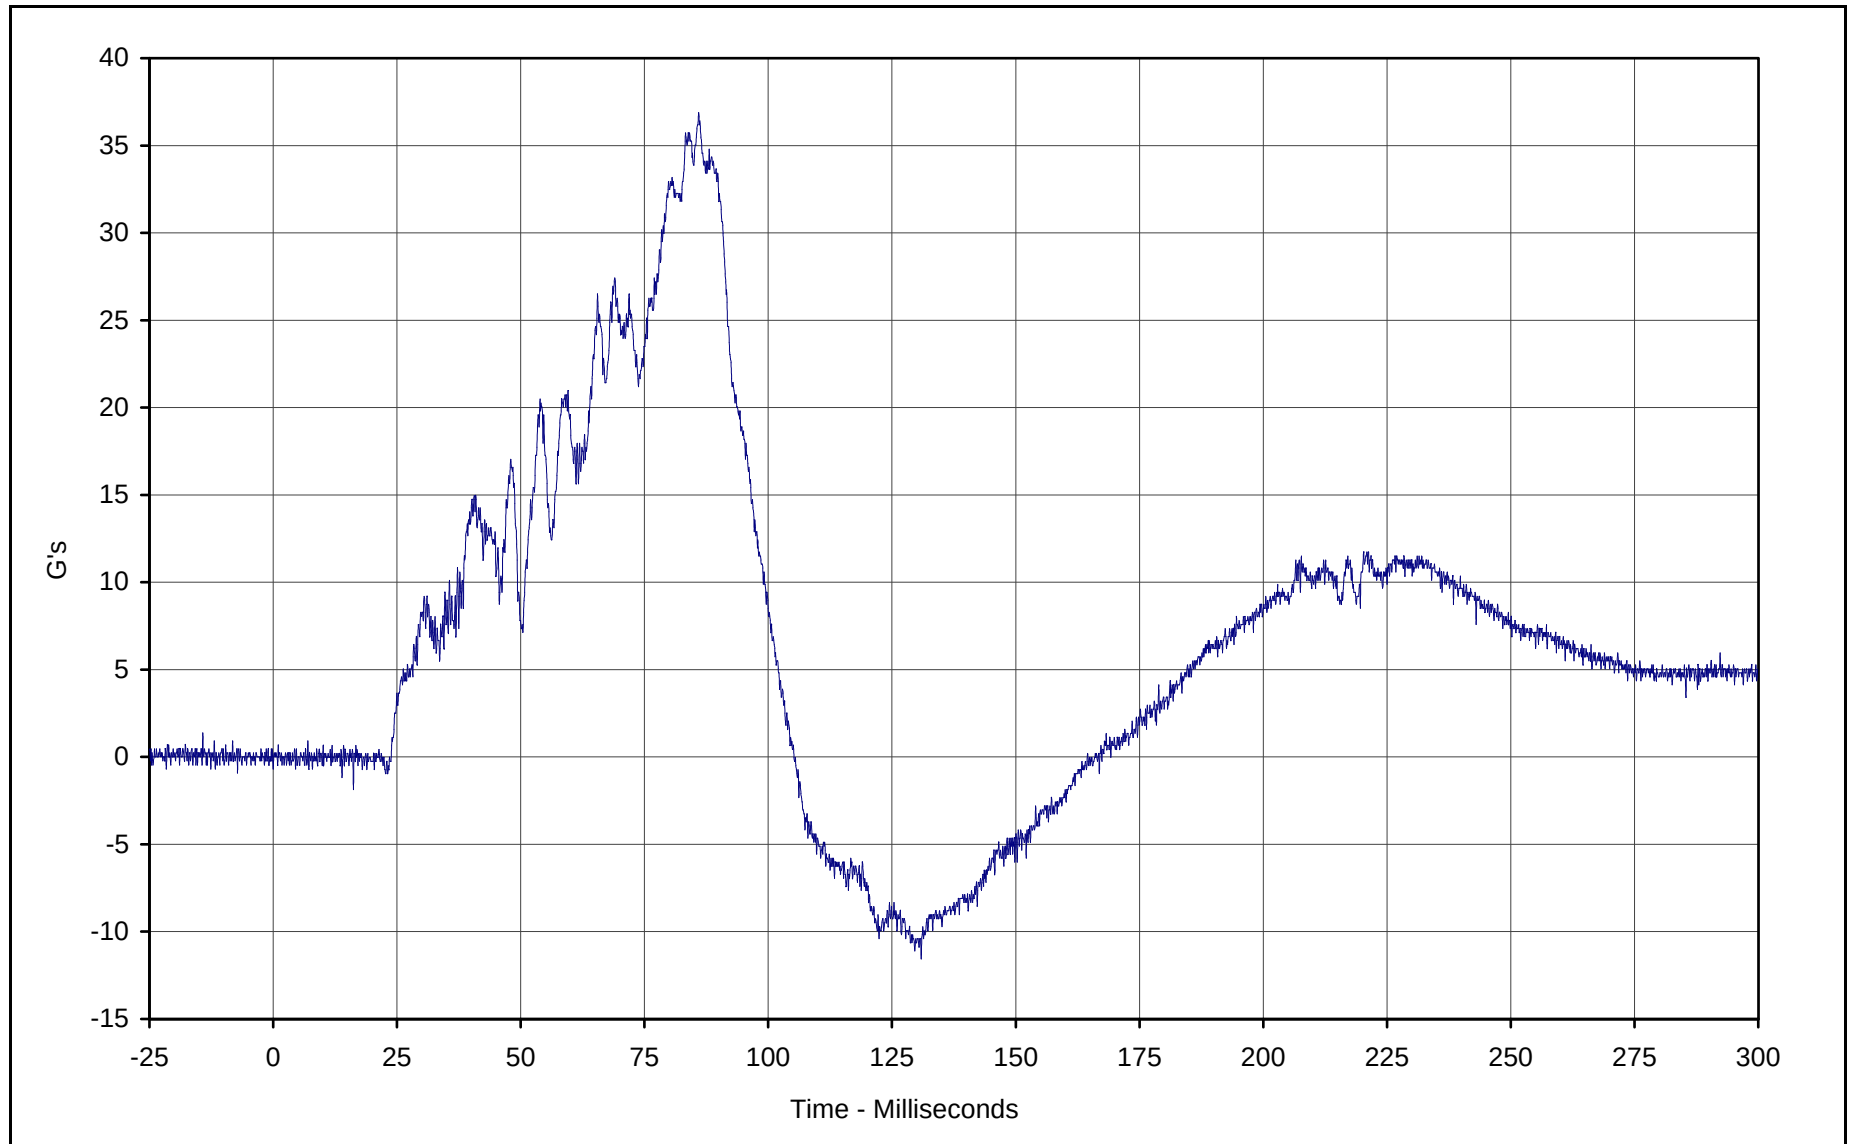


Curve Description: Passenger Head Redundant Z
Maximum Value: 36.9 at 85.9 Milliseconds
Minimum Value: -11.6 at 130.9 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: FIL-050

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

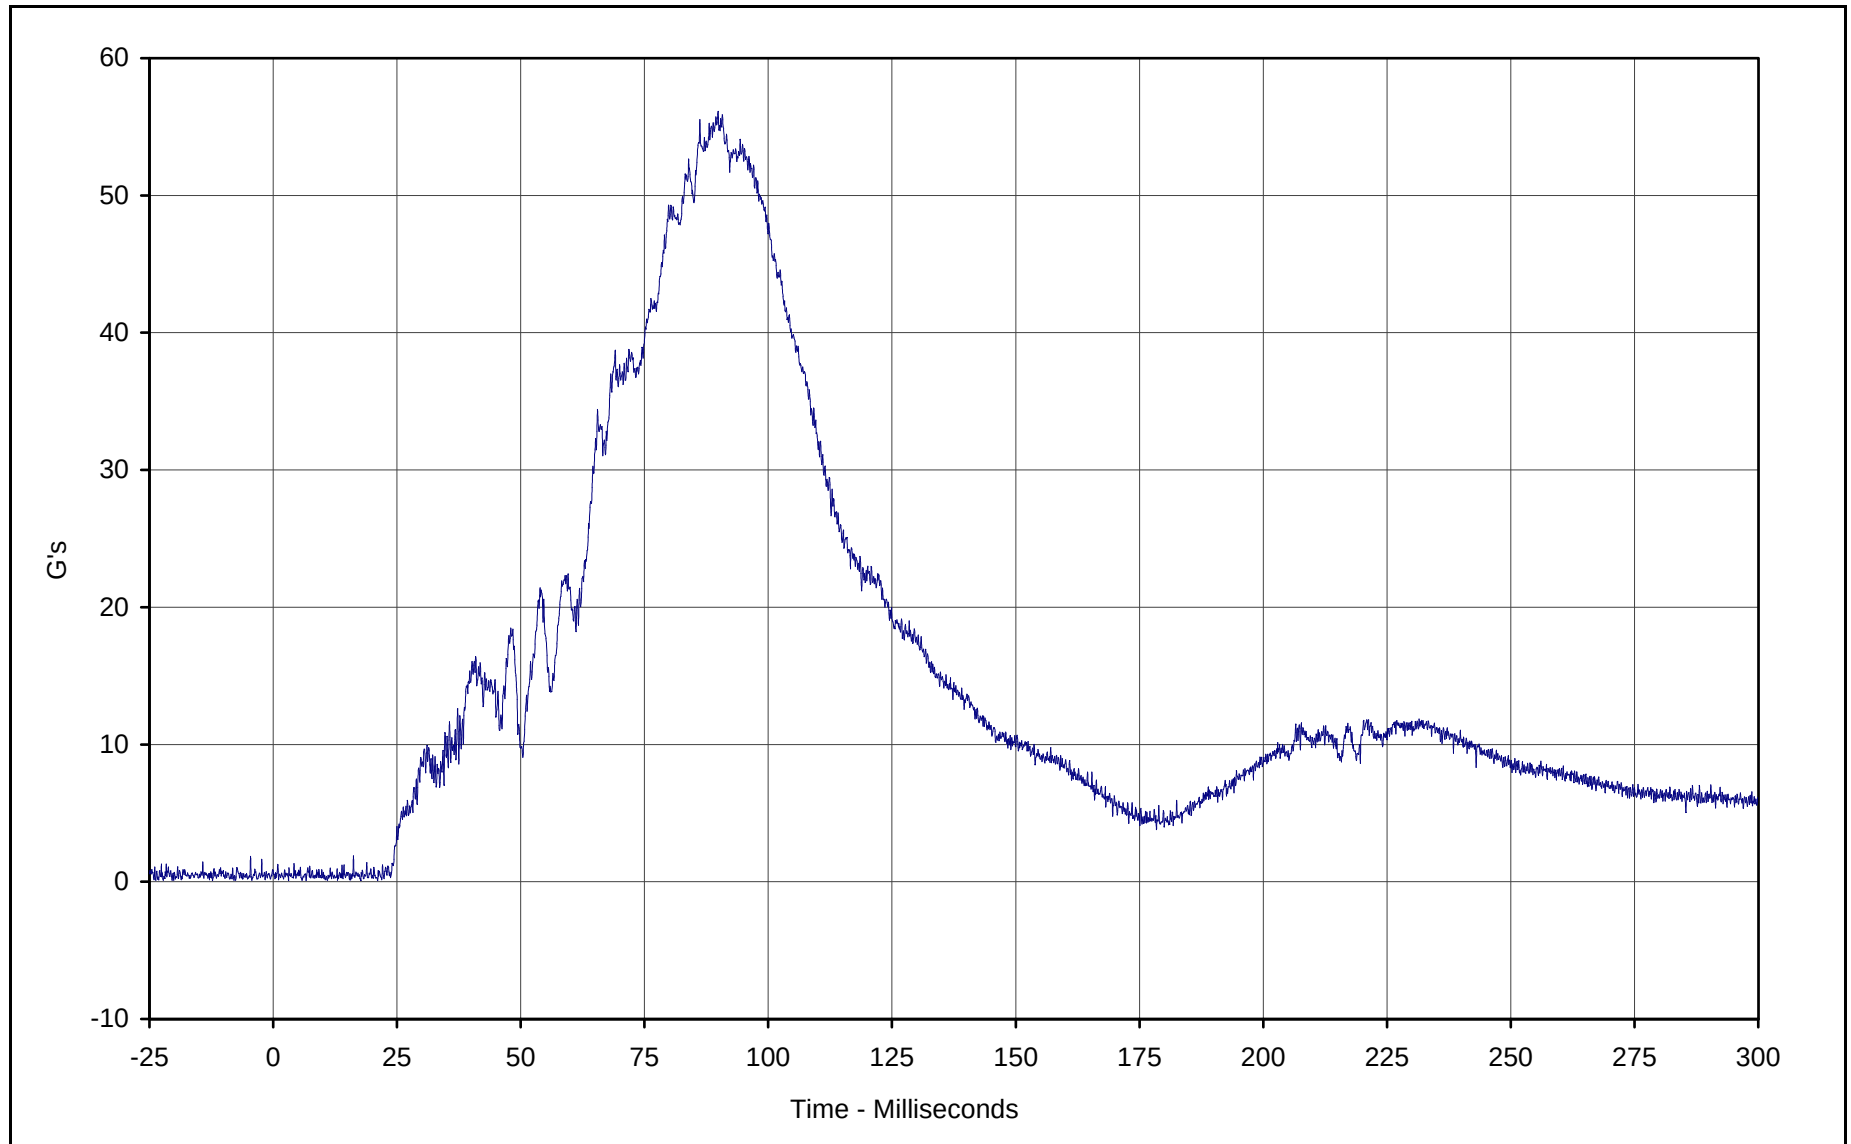

Curve Description: Passenger Head Resultant Redundant

Maximum Value: 56.1 at 89.9 Milliseconds

Minimum Value: 0.1 at 5.8 Milliseconds

SAE Filter Class: 1000

Date of Test: 02/13/01


Curve Number: RES-048

Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-74

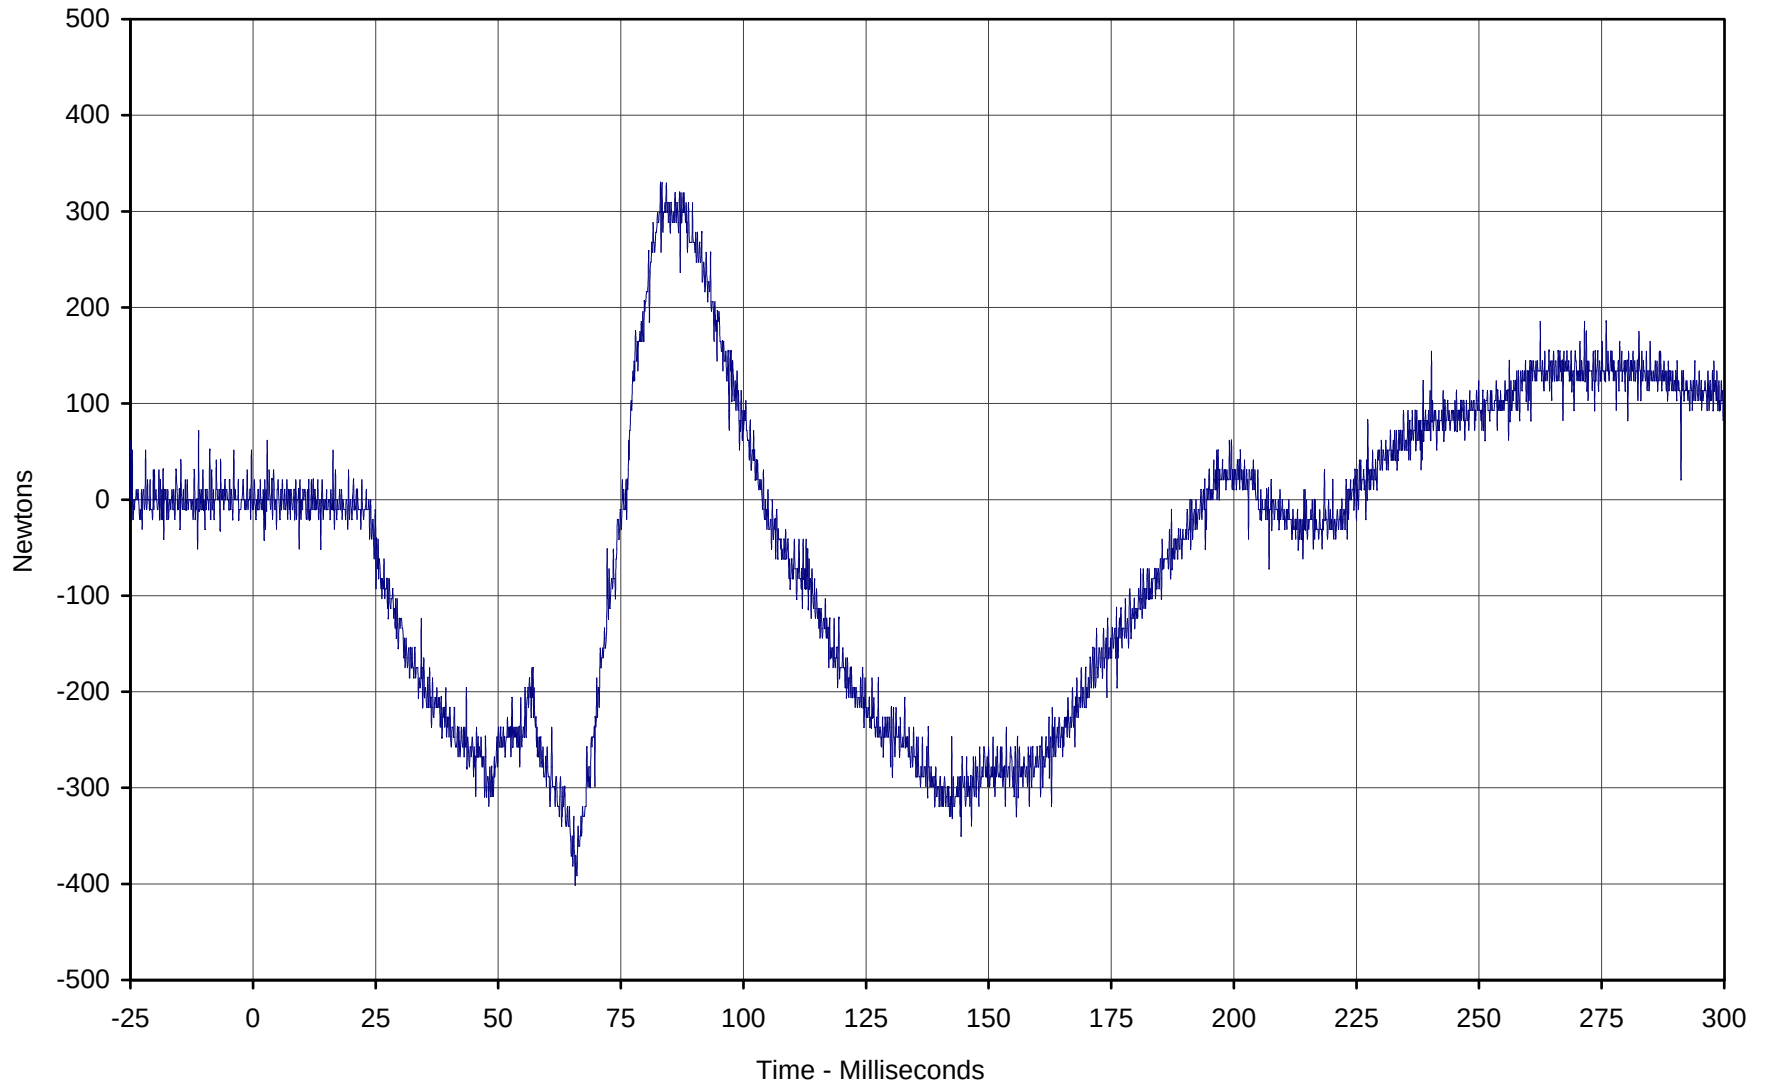


Curve Description: Passenger Neck Force X
Maximum Value: 329.6 at 83.1 Milliseconds
Minimum Value: -401.7 at 65.7 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: FIL-051

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-75

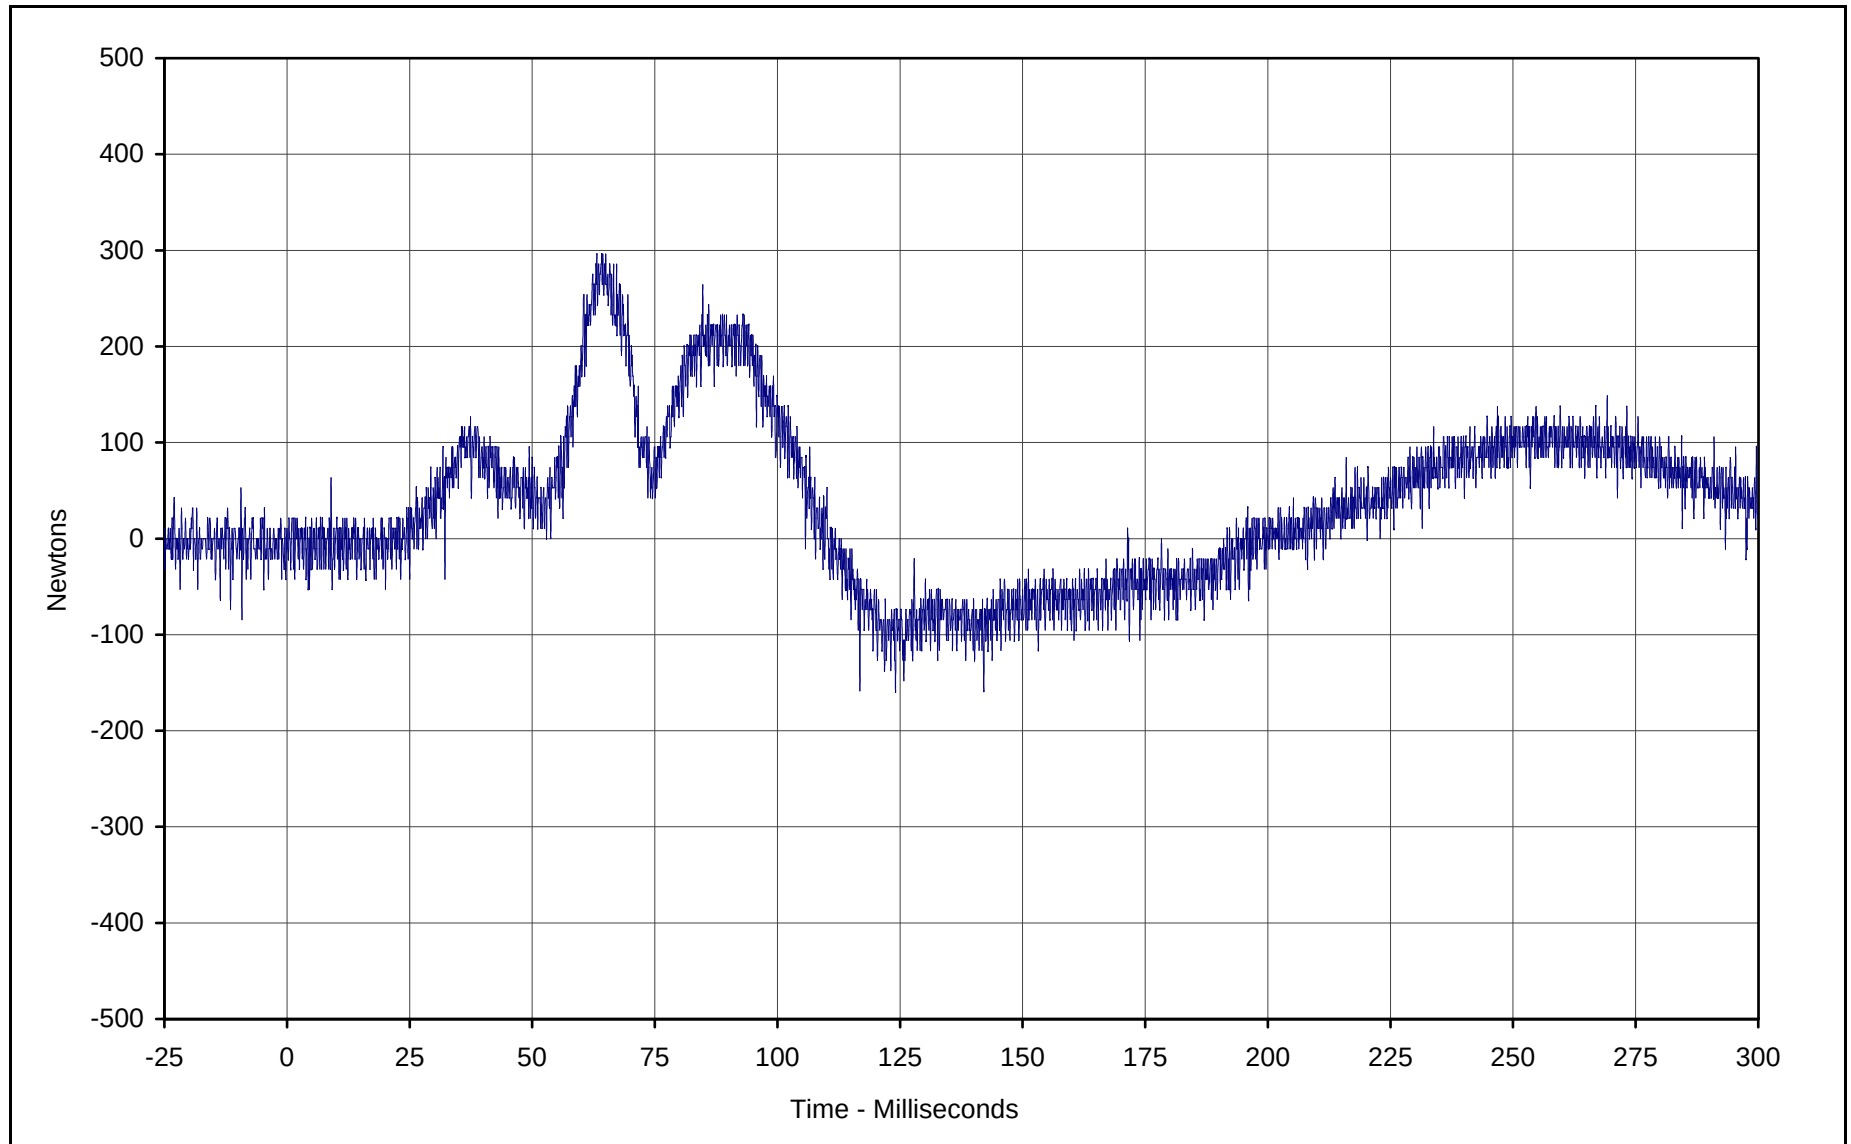


Curve Description: Passenger Neck Force Y
Maximum Value: 296.2 at 63.2 Milliseconds
Minimum Value: -158.7 at 116.8 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: FIL-052

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup




KAR21001-10

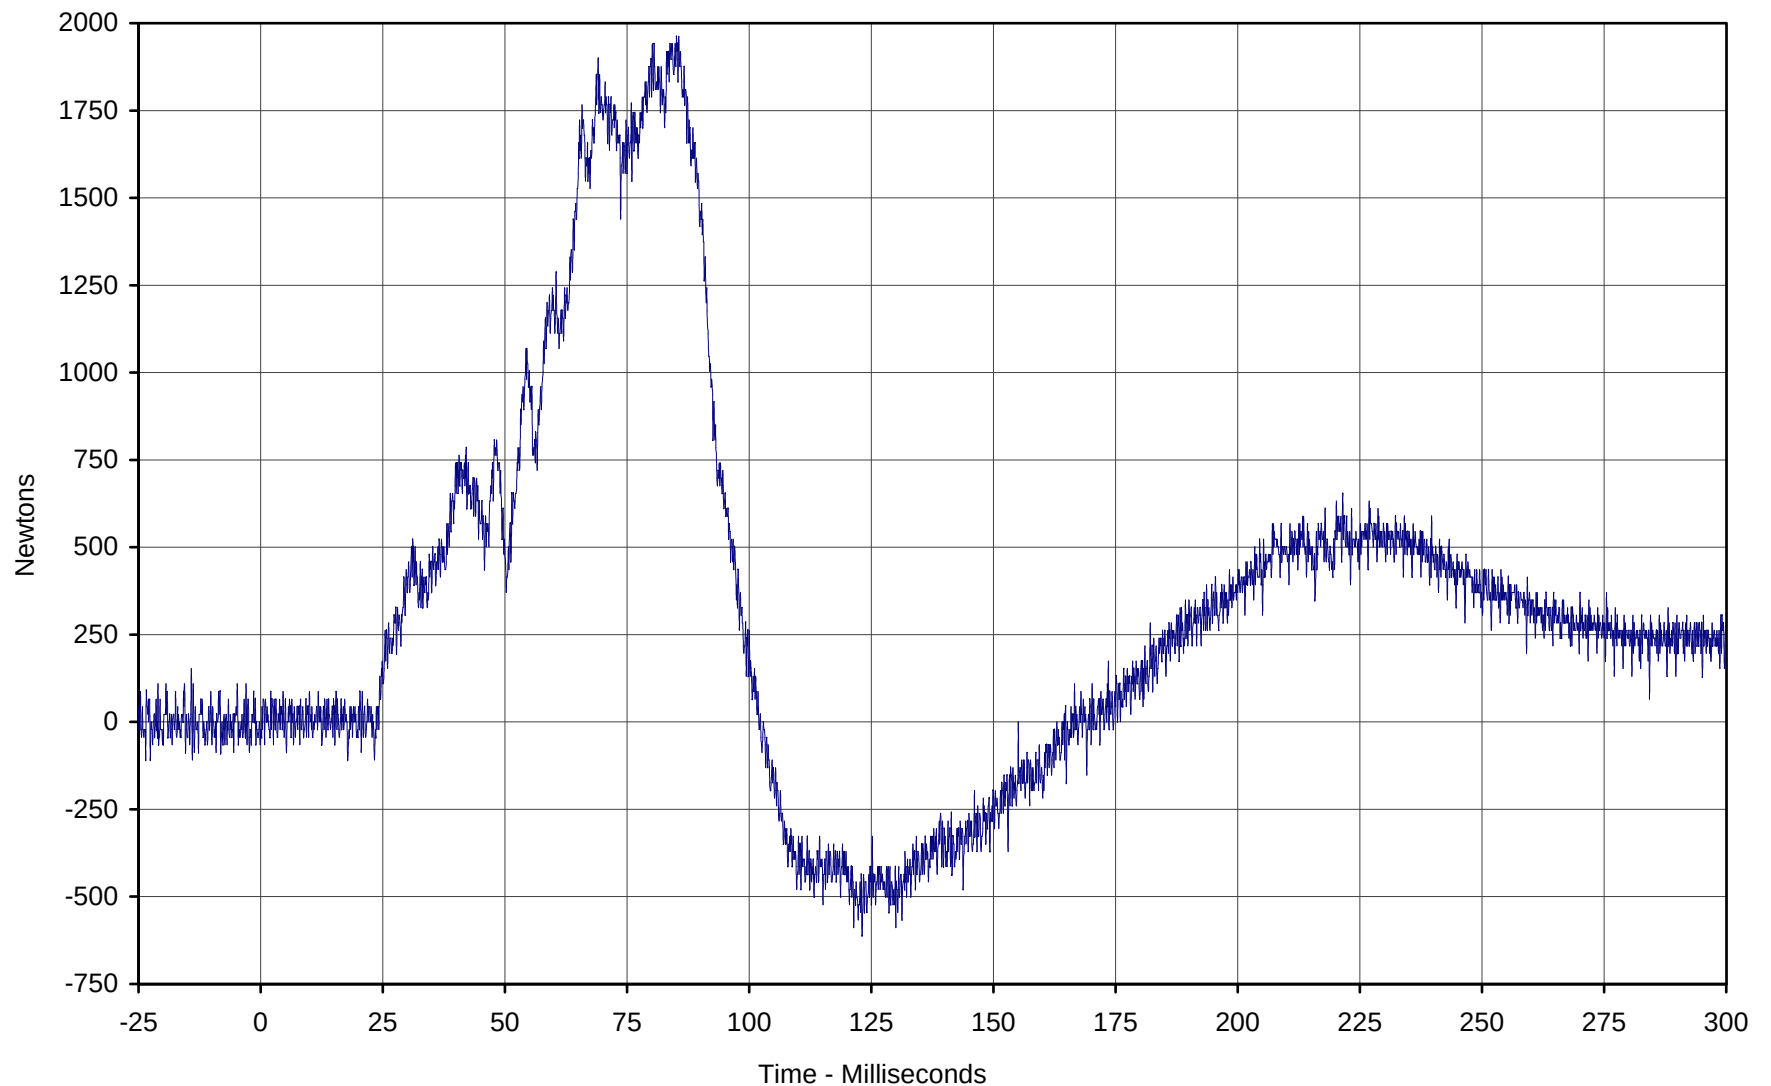

Curve Description: Passenger Neck Force Z
Maximum Value: 1962.8 at 85.1 Milliseconds
Minimum Value: -610.6 at 123.1 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: FIL-053

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



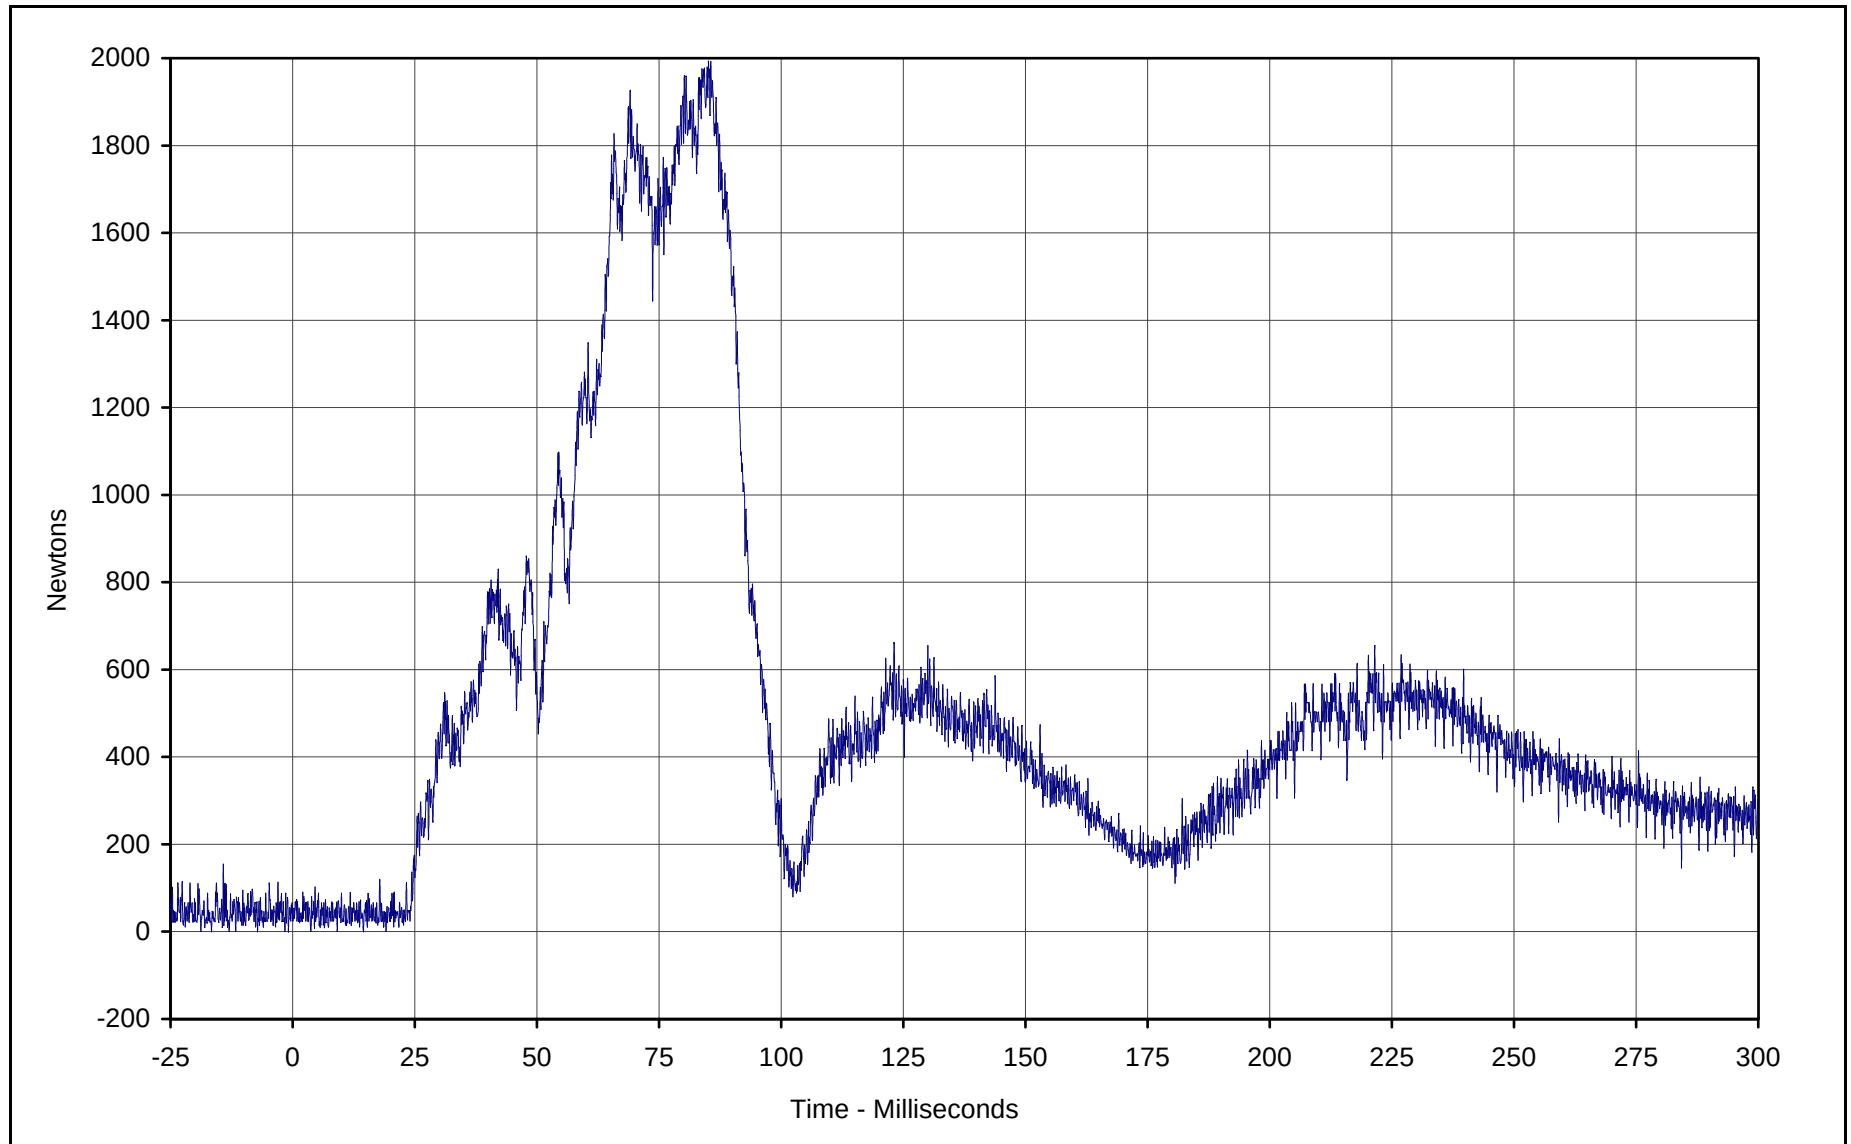


Curve Description: Passenger Neck Force Resultant
Maximum Value: 1993.0 at 85.6 Milliseconds
Minimum Value: 0.0 at 3.7 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: RES-051

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-78

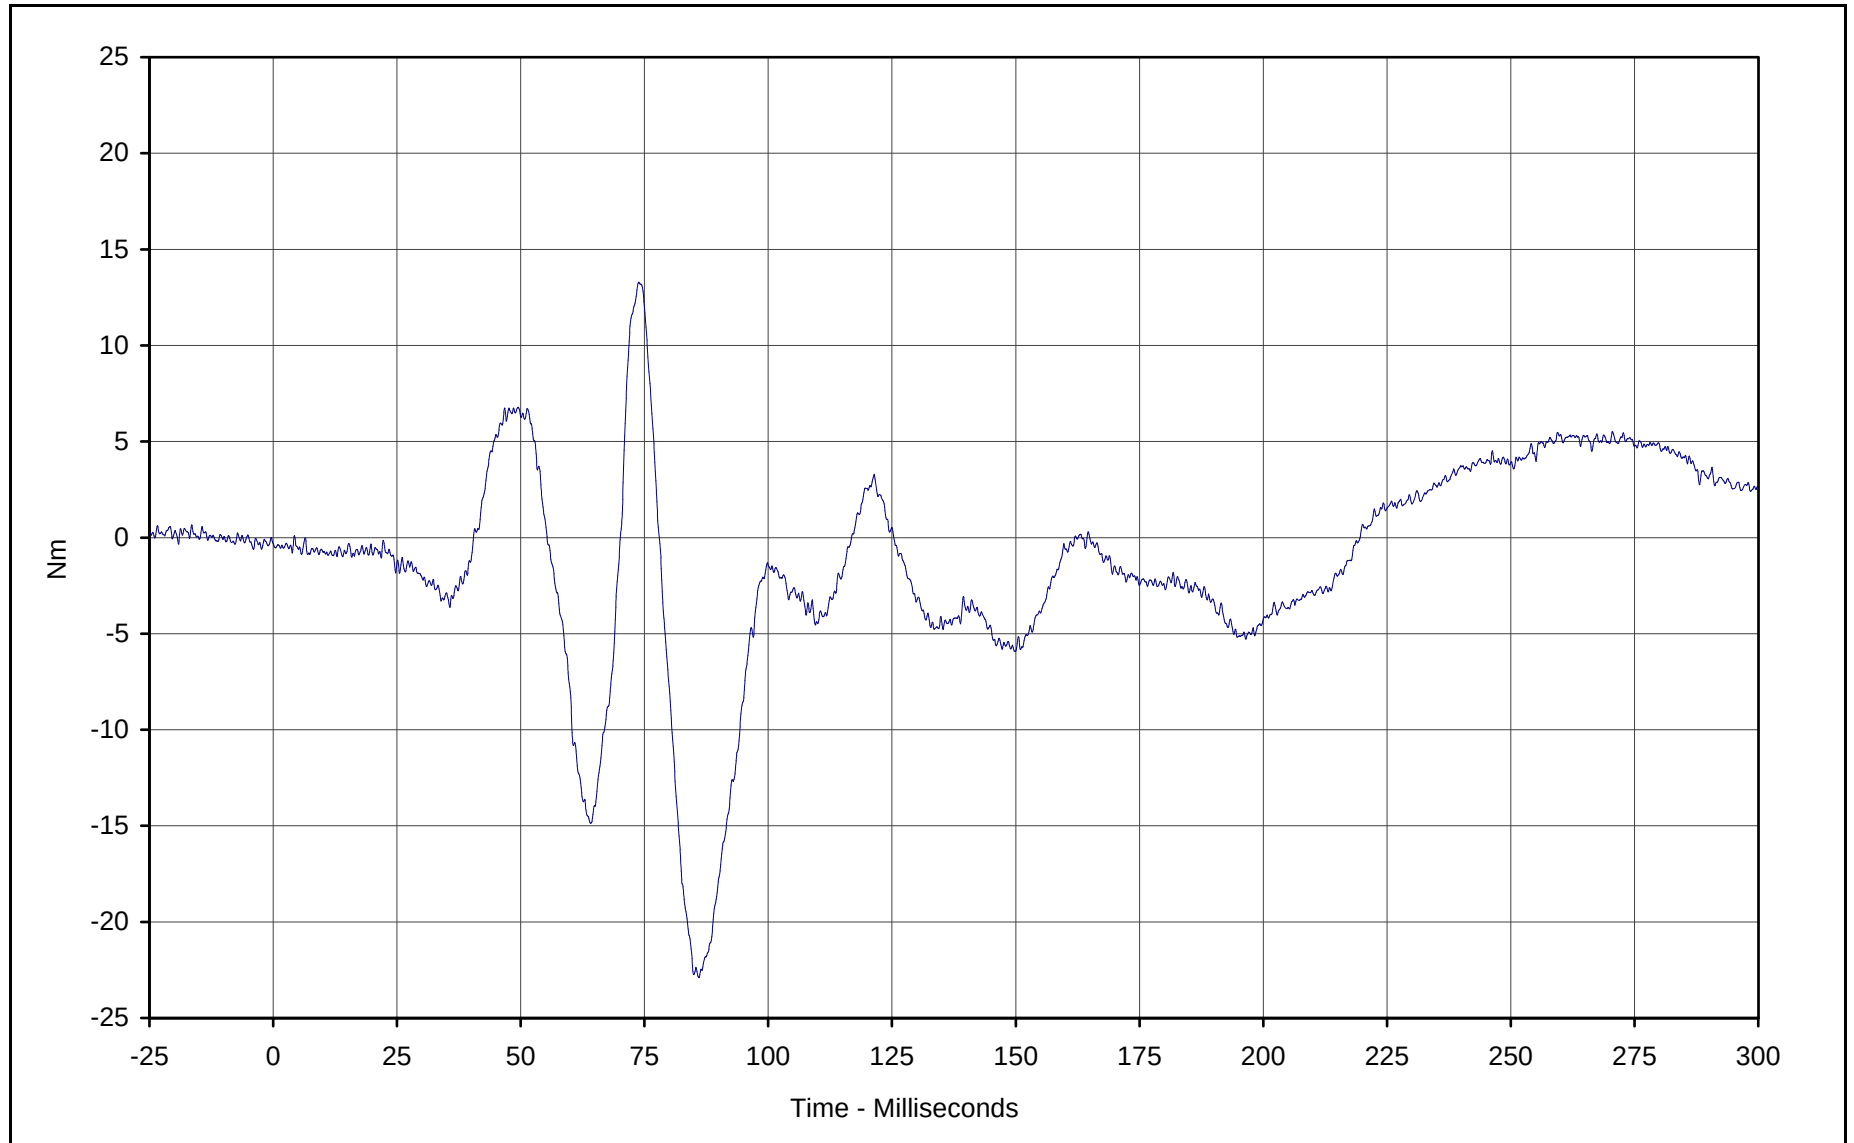


Curve Description: Passenger Neck Moment X
Maximum Value: 13.3 at 73.8 Milliseconds
Minimum Value: -22.9 at 86.0 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: FIL-054

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-79

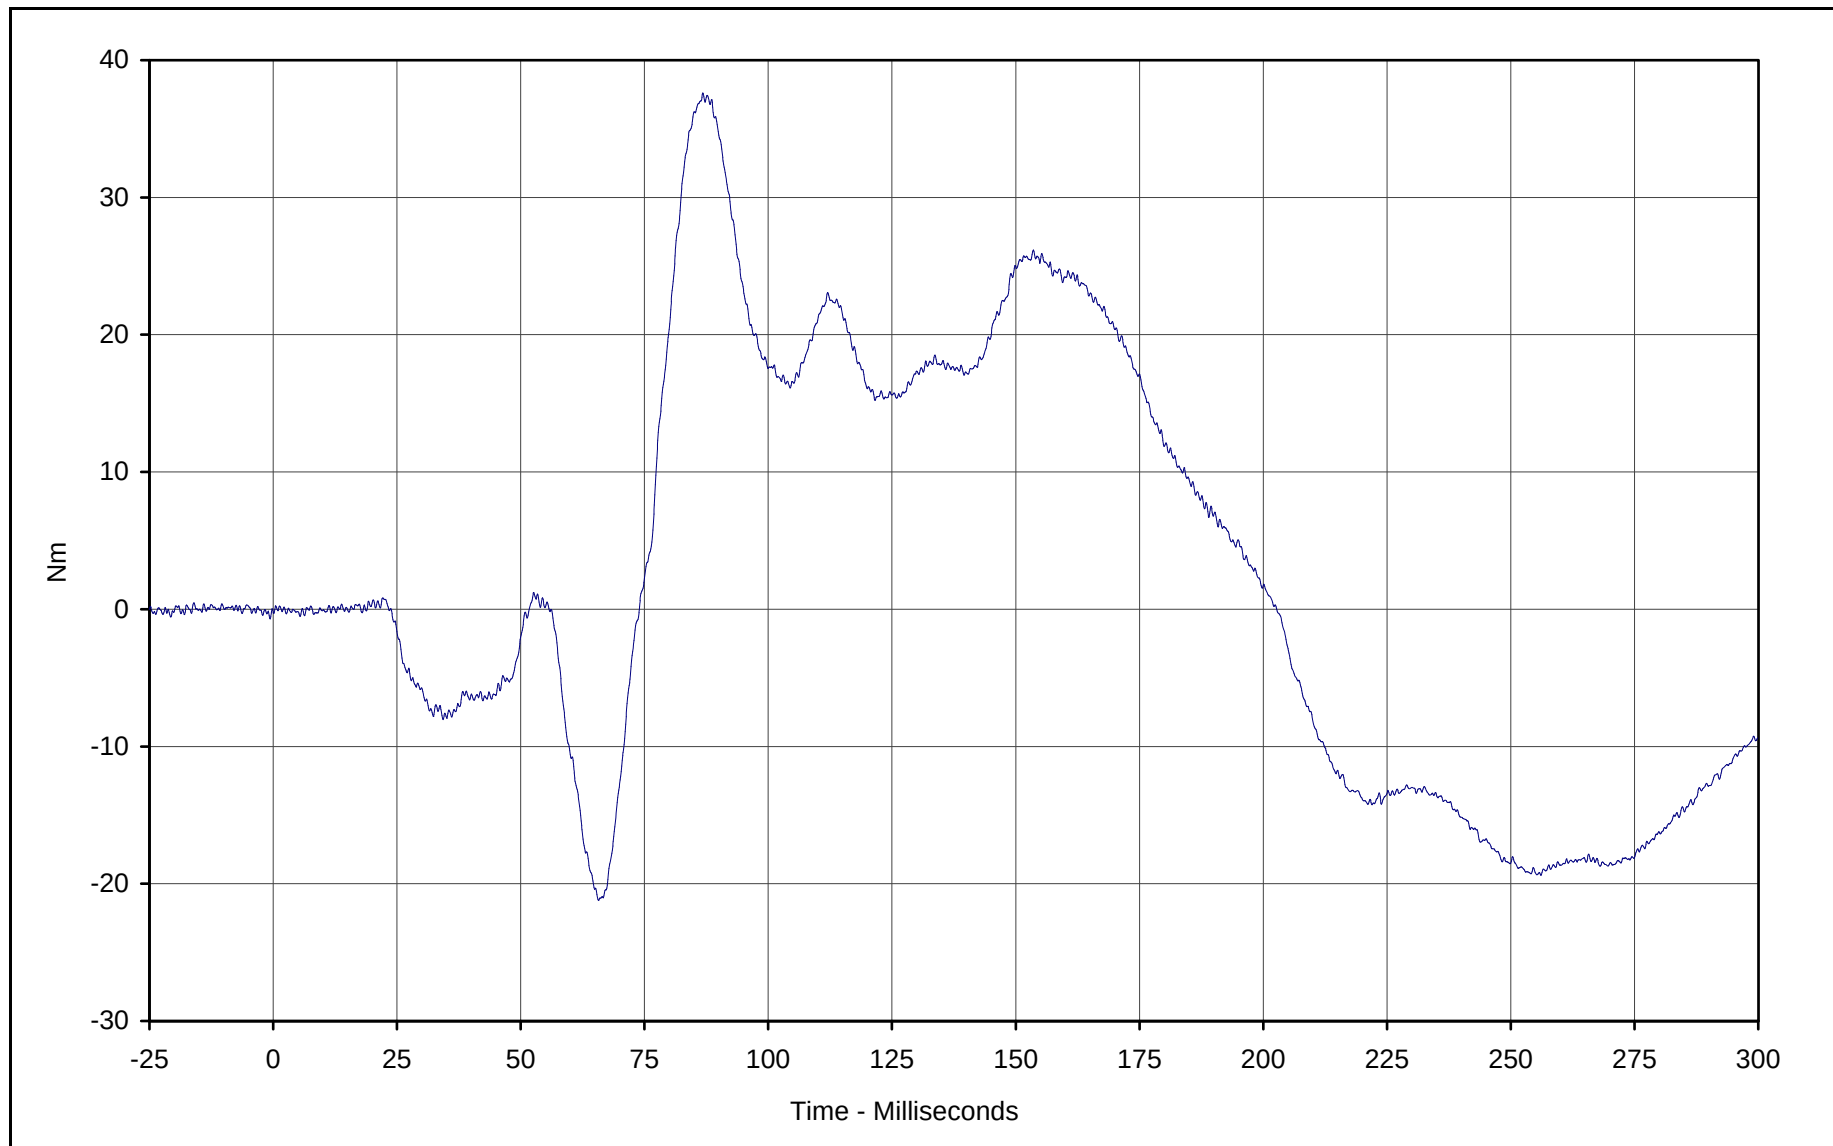


Curve Description: Passenger Neck Moment Y
Maximum Value: 37.6 at 86.8 Milliseconds
Minimum Value: -21.2 at 65.7 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: FIL-055

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-80

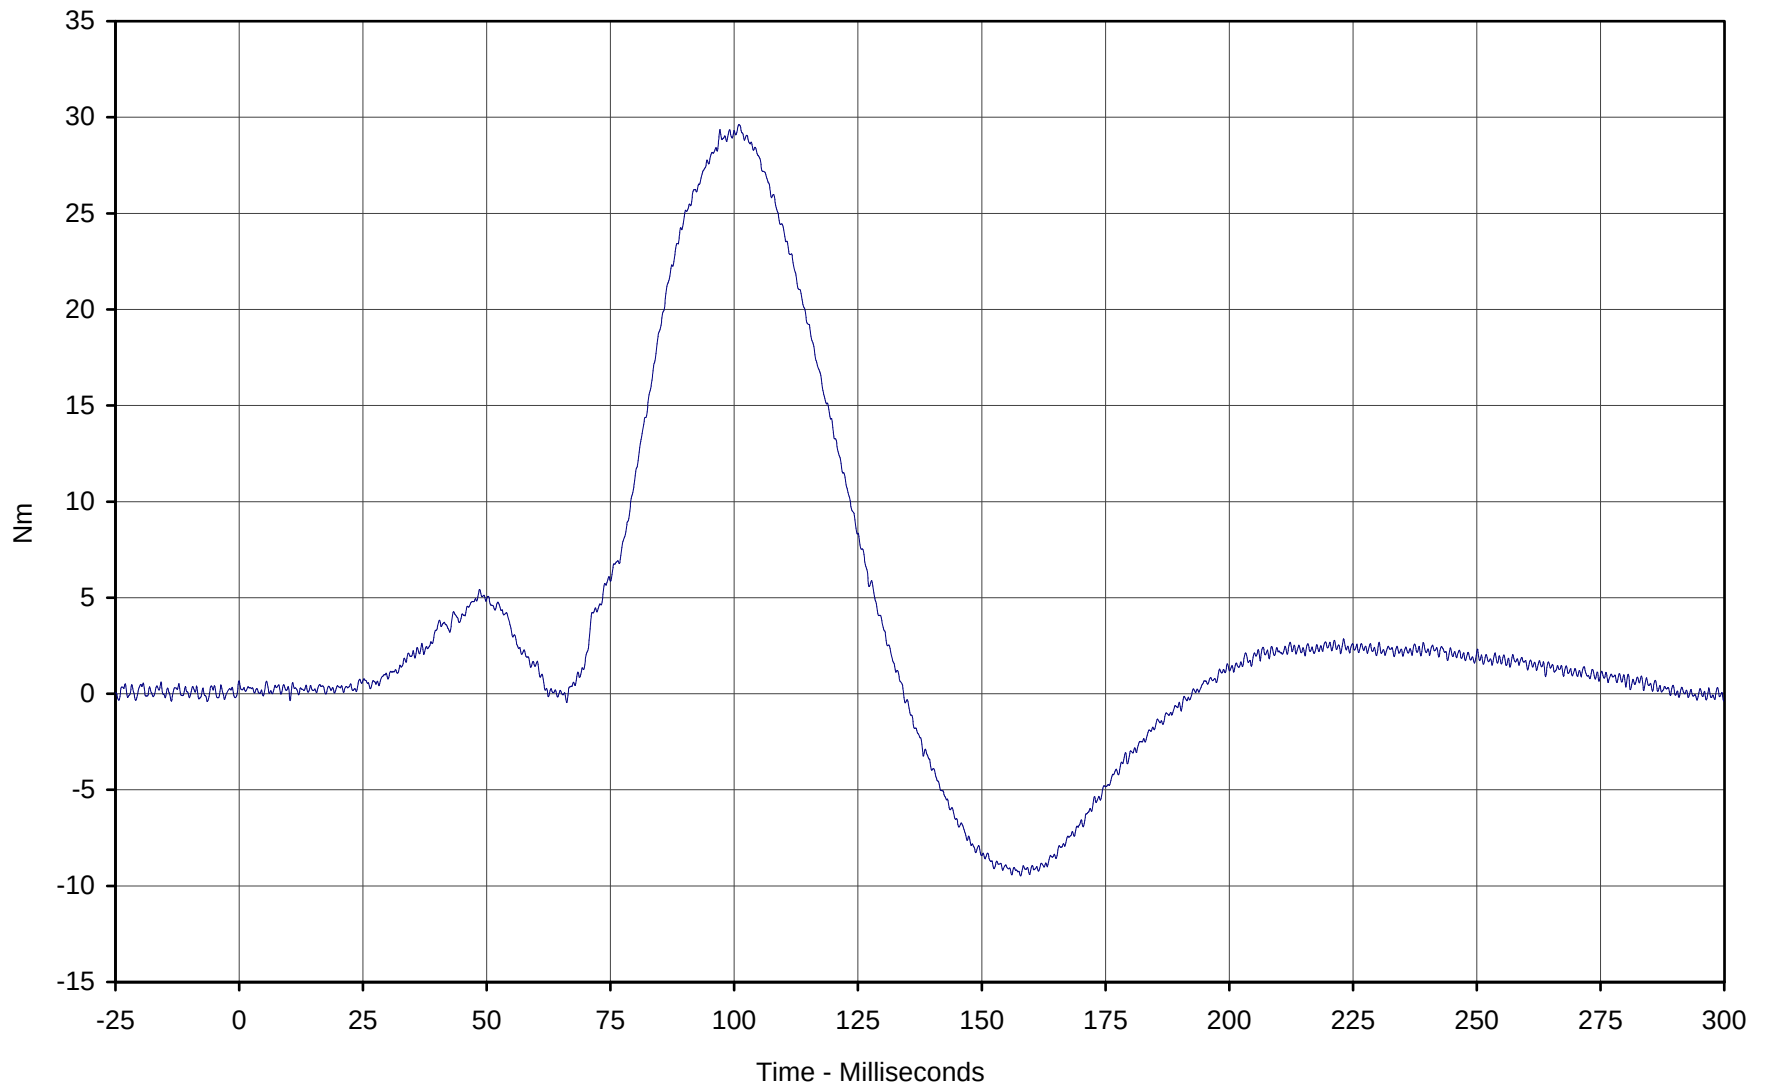


Curve Description: Passenger Neck Moment Z
Maximum Value: 29.6 at 101.0 Milliseconds
Minimum Value: -9.5 at 157.9 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: FIL-056

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-82

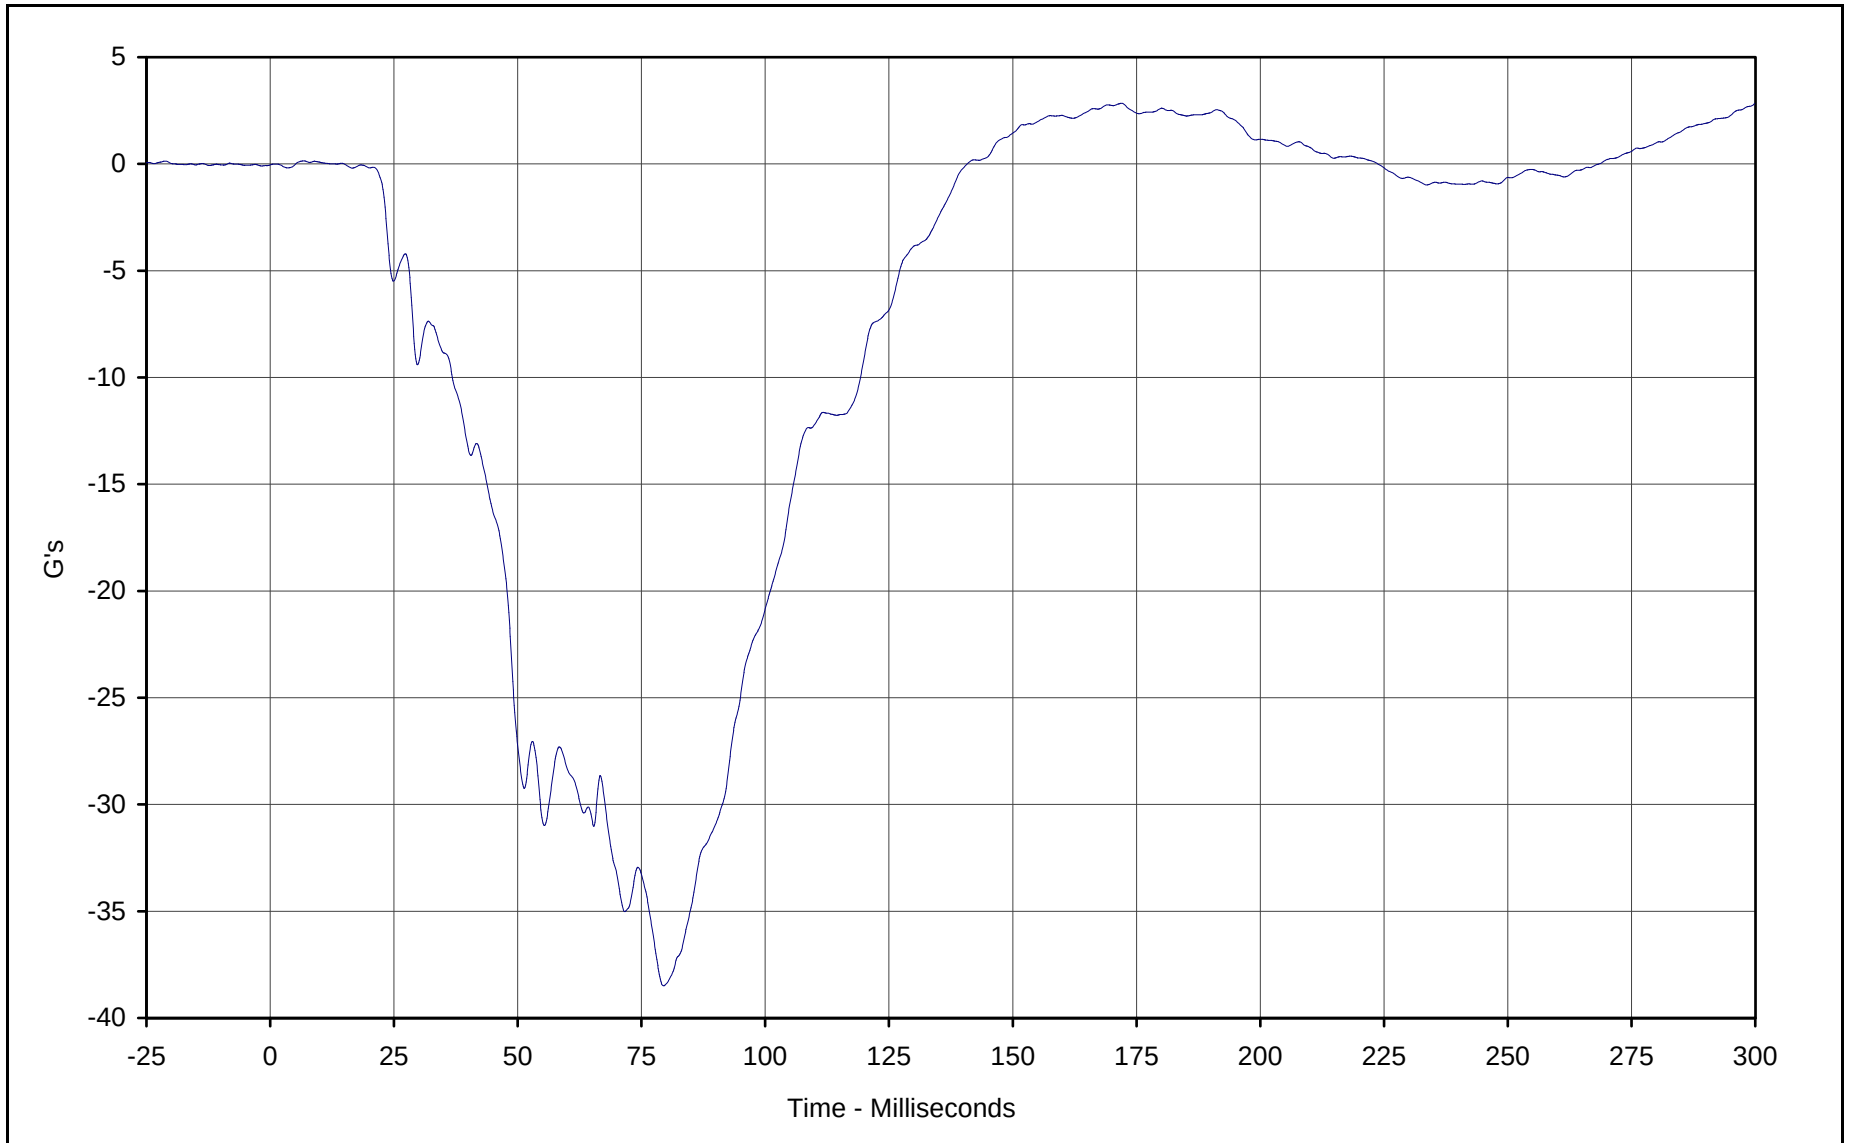


Curve Description: Passenger Chest Primary X
Maximum Value: 2.8 at 172.0 Milliseconds
Minimum Value: -38.5 at 79.5 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: FIL-057

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

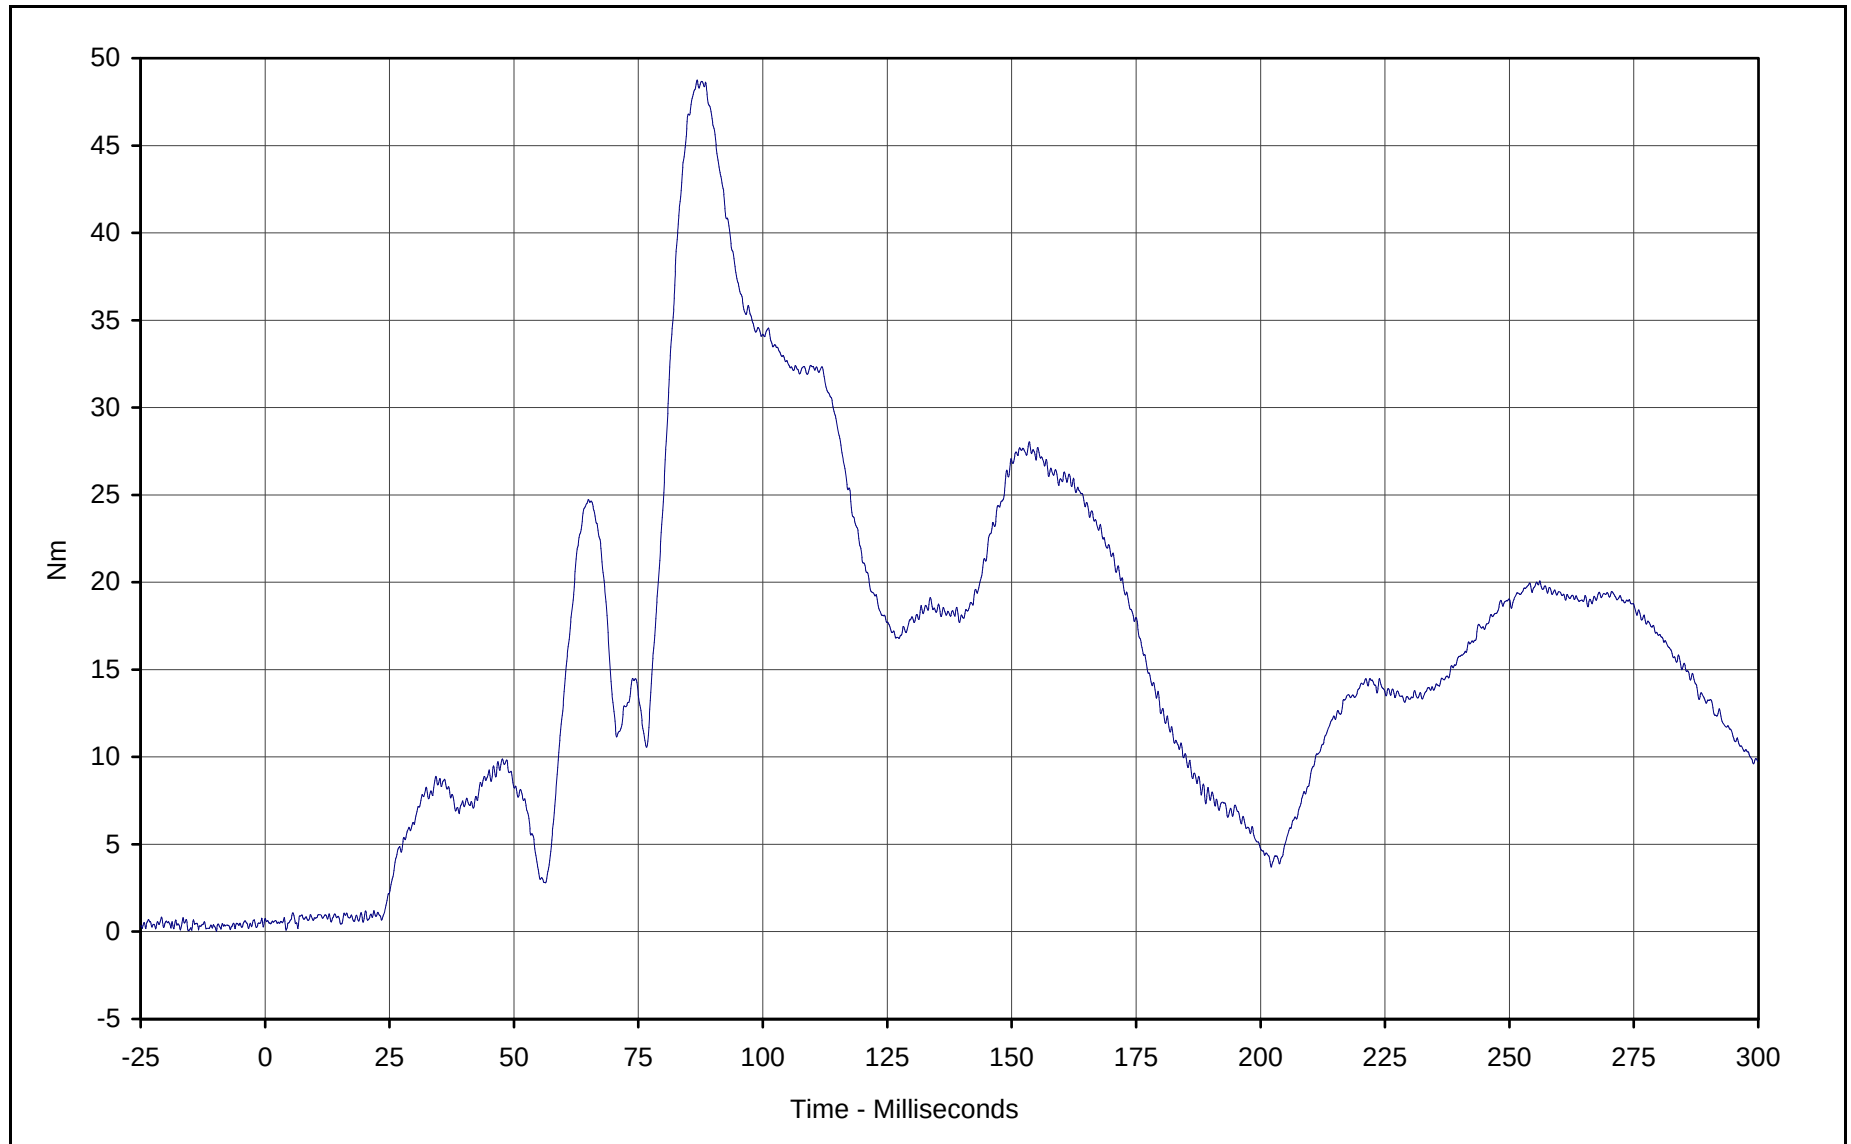


Curve Description: Passenger Neck Moment Resultant
Maximum Value: 48.7 at 86.8 Milliseconds
Minimum Value: 0.1 at 4.2 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: RES-054

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-83

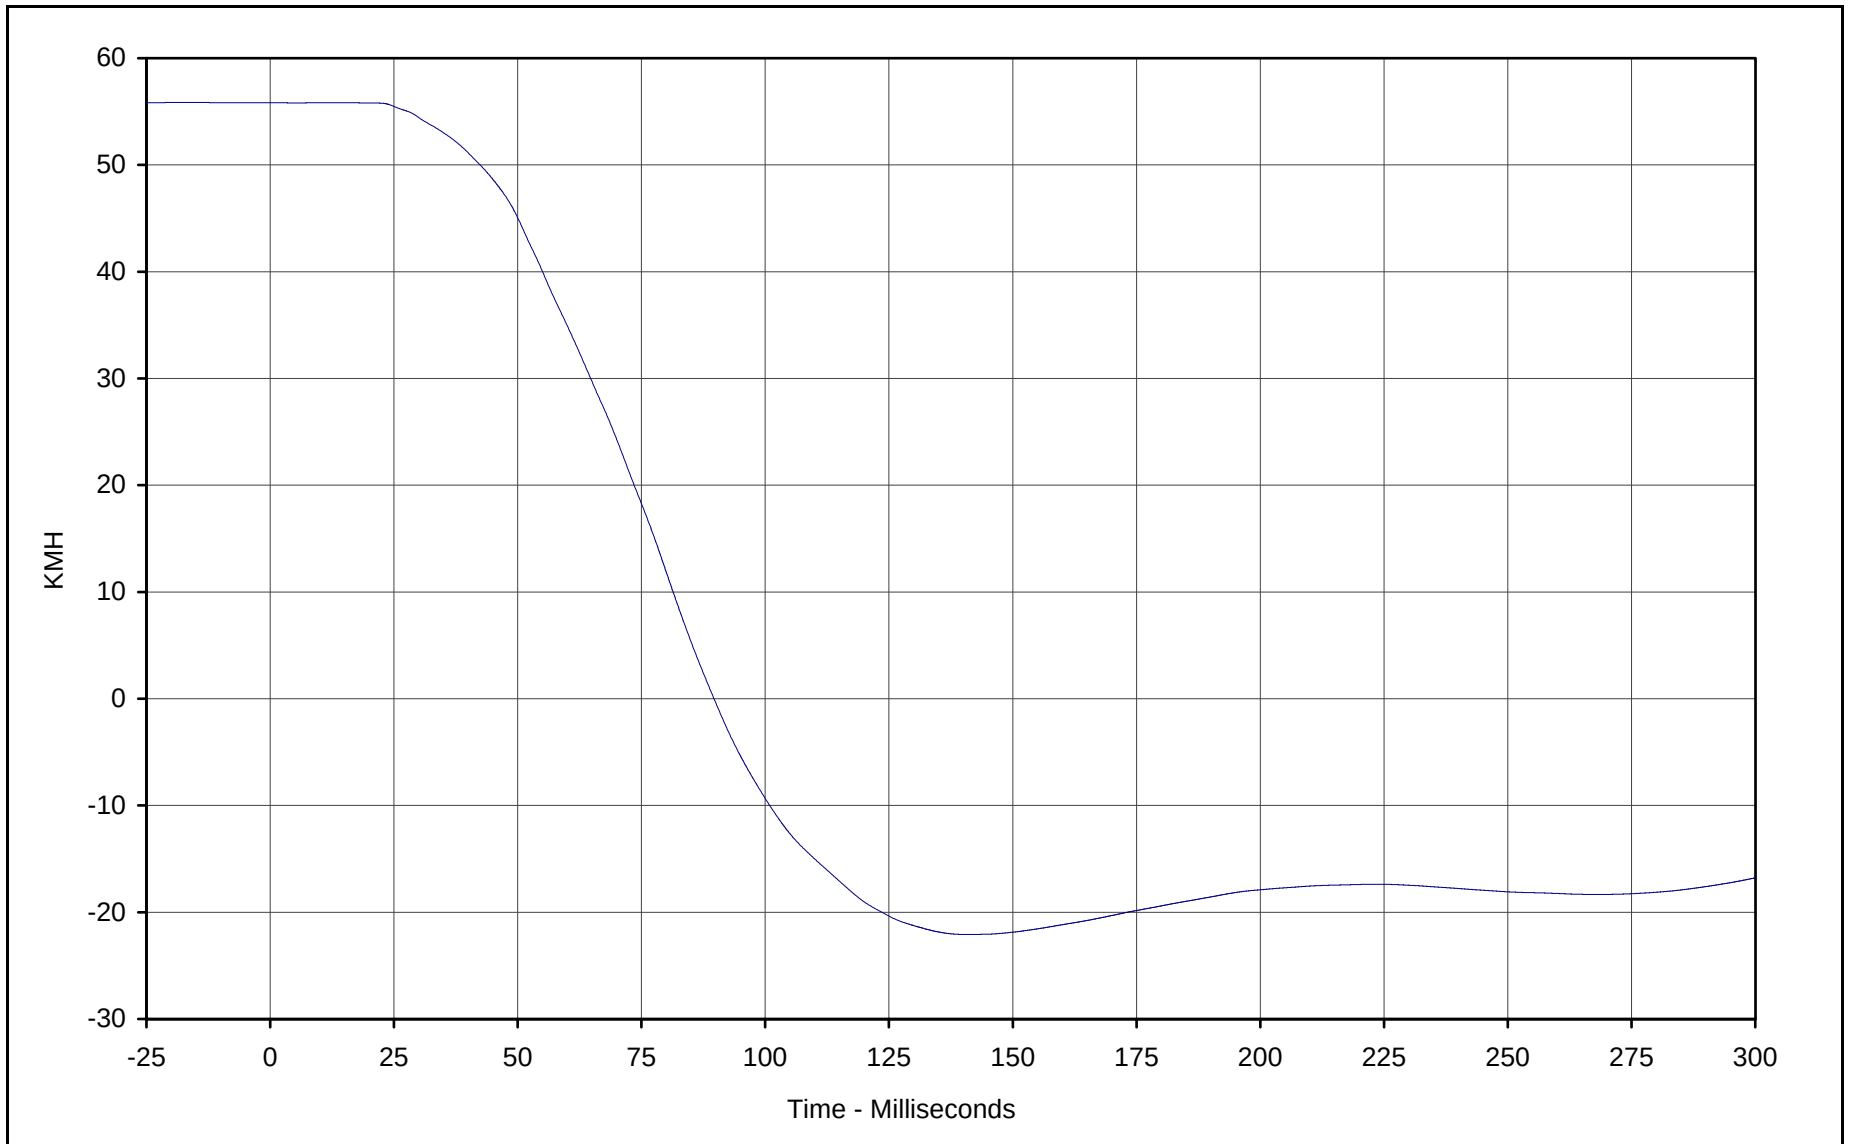


Curve Description: Passenger Chest Primary X Velocity
Maximum Value: 55.8 at 14.9 Milliseconds
Minimum Value: -22.1 at 140.8 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: IN1-057

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-84

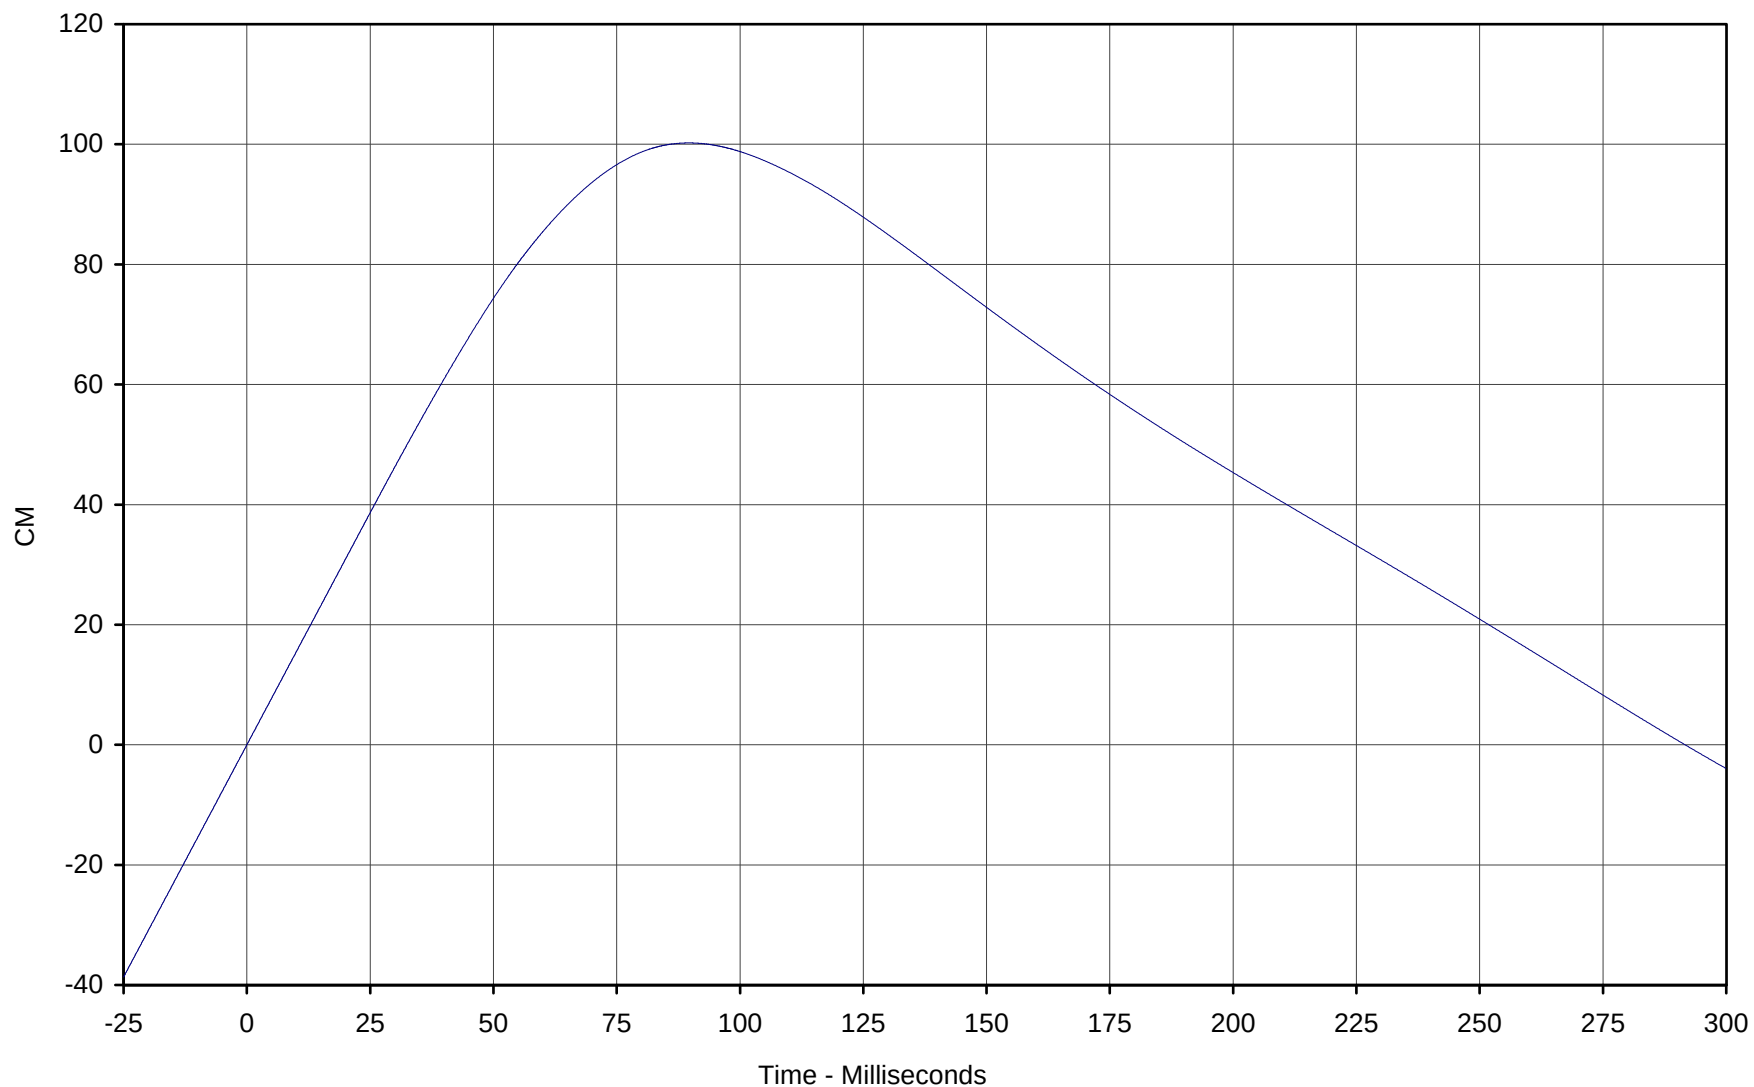


Curve Description: Passenger Chest Primary X Displ.
Maximum Value: 100.2 at 89.7 Milliseconds
Minimum Value: -3.9 at 299.9 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: IN2-057

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-85

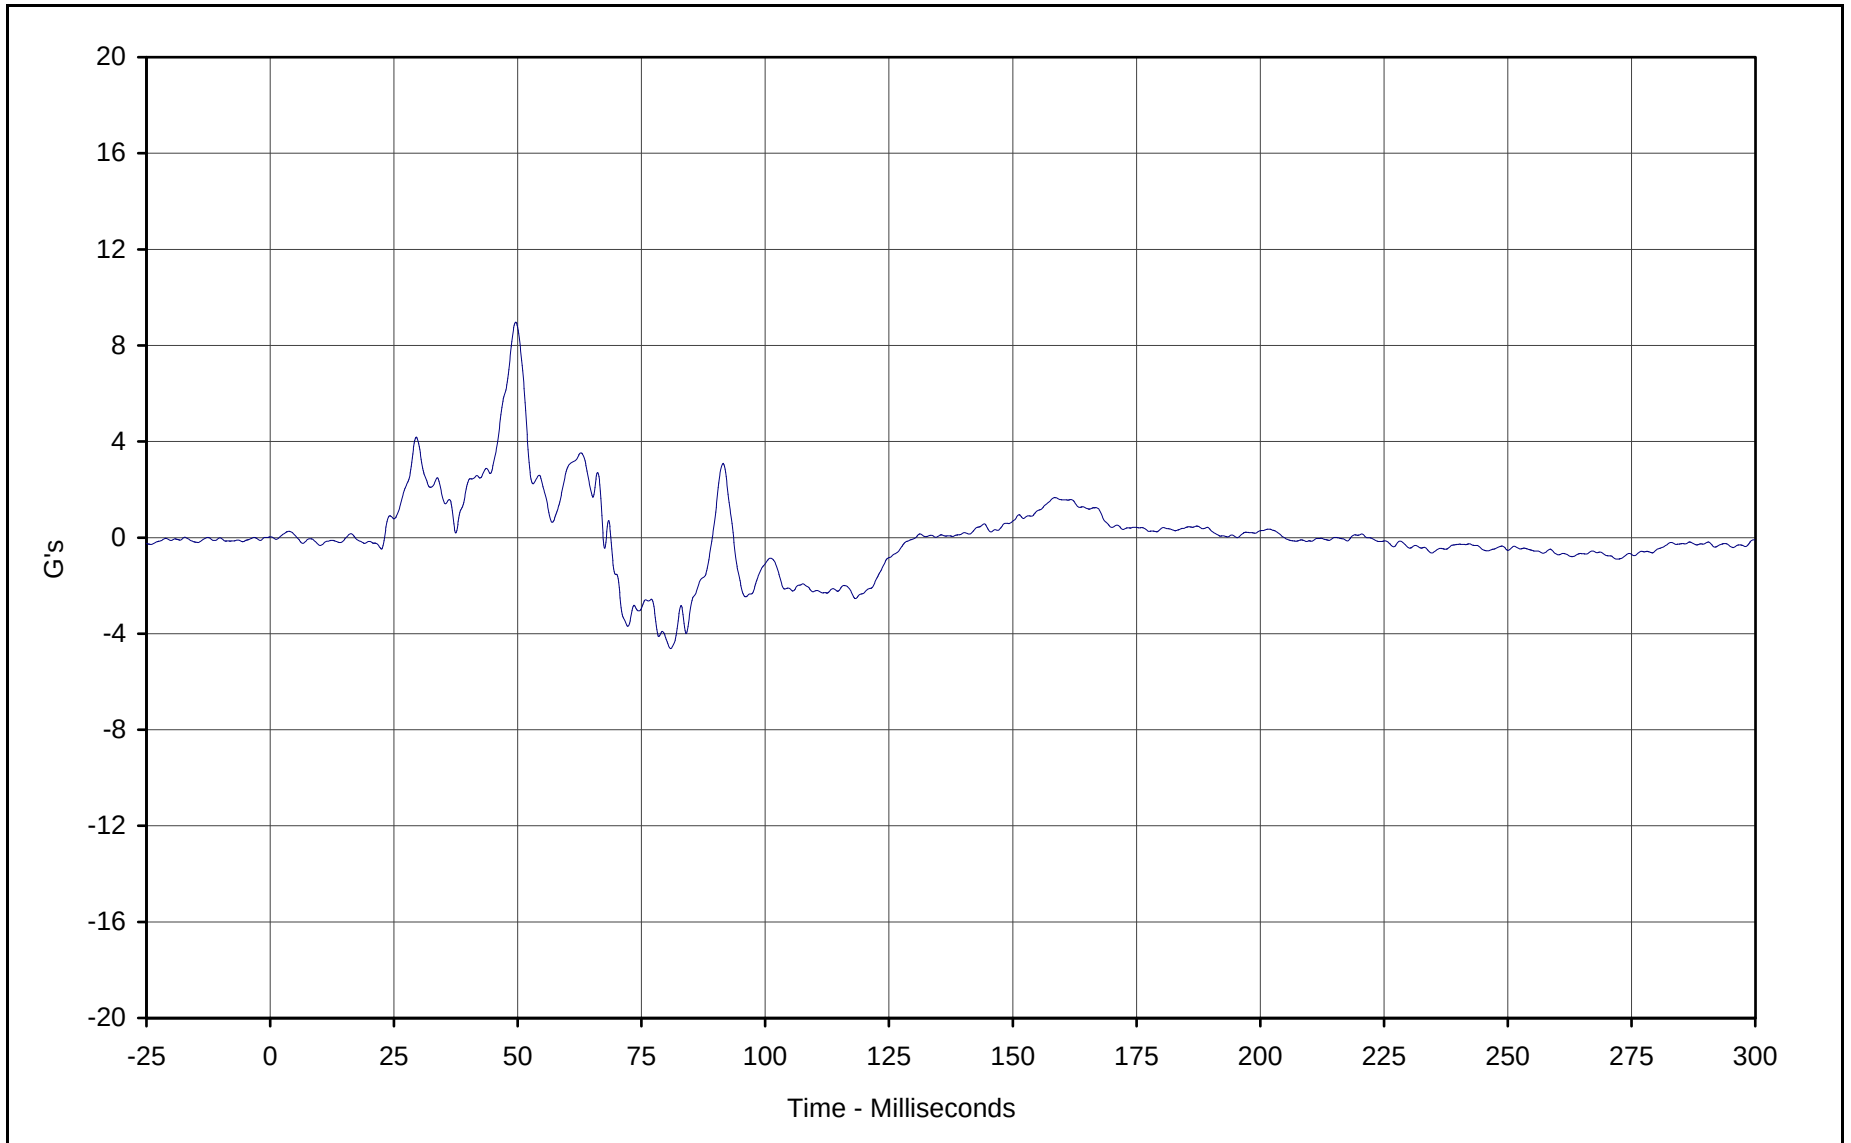


Curve Description: Passenger Chest Primary Y
Maximum Value: 9.0 at 49.6 Milliseconds
Minimum Value: -4.6 at 80.9 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: FIL-058

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

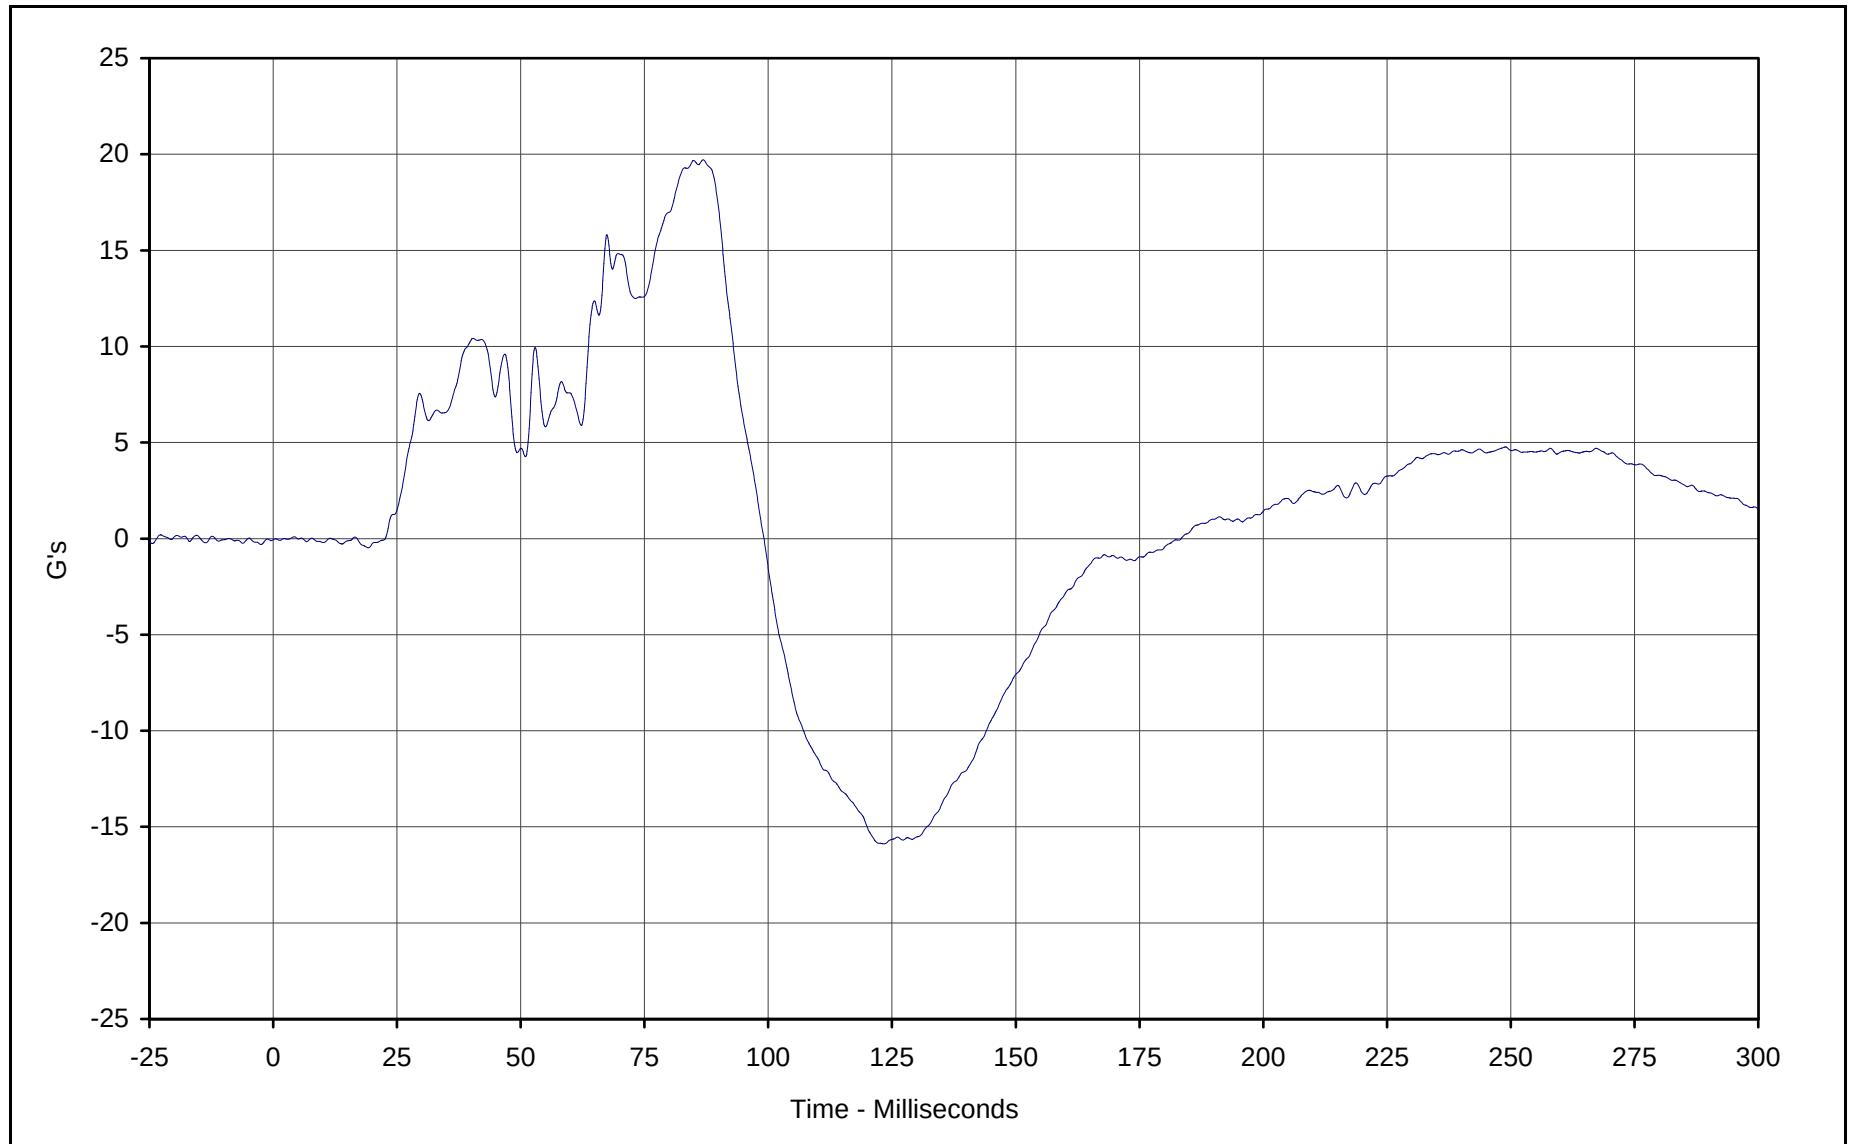


Curve Description: Passenger Chest Primary Z
Maximum Value: 19.7 at 86.9 Milliseconds
Minimum Value: -15.9 at 123.4 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: FIL-059

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-87

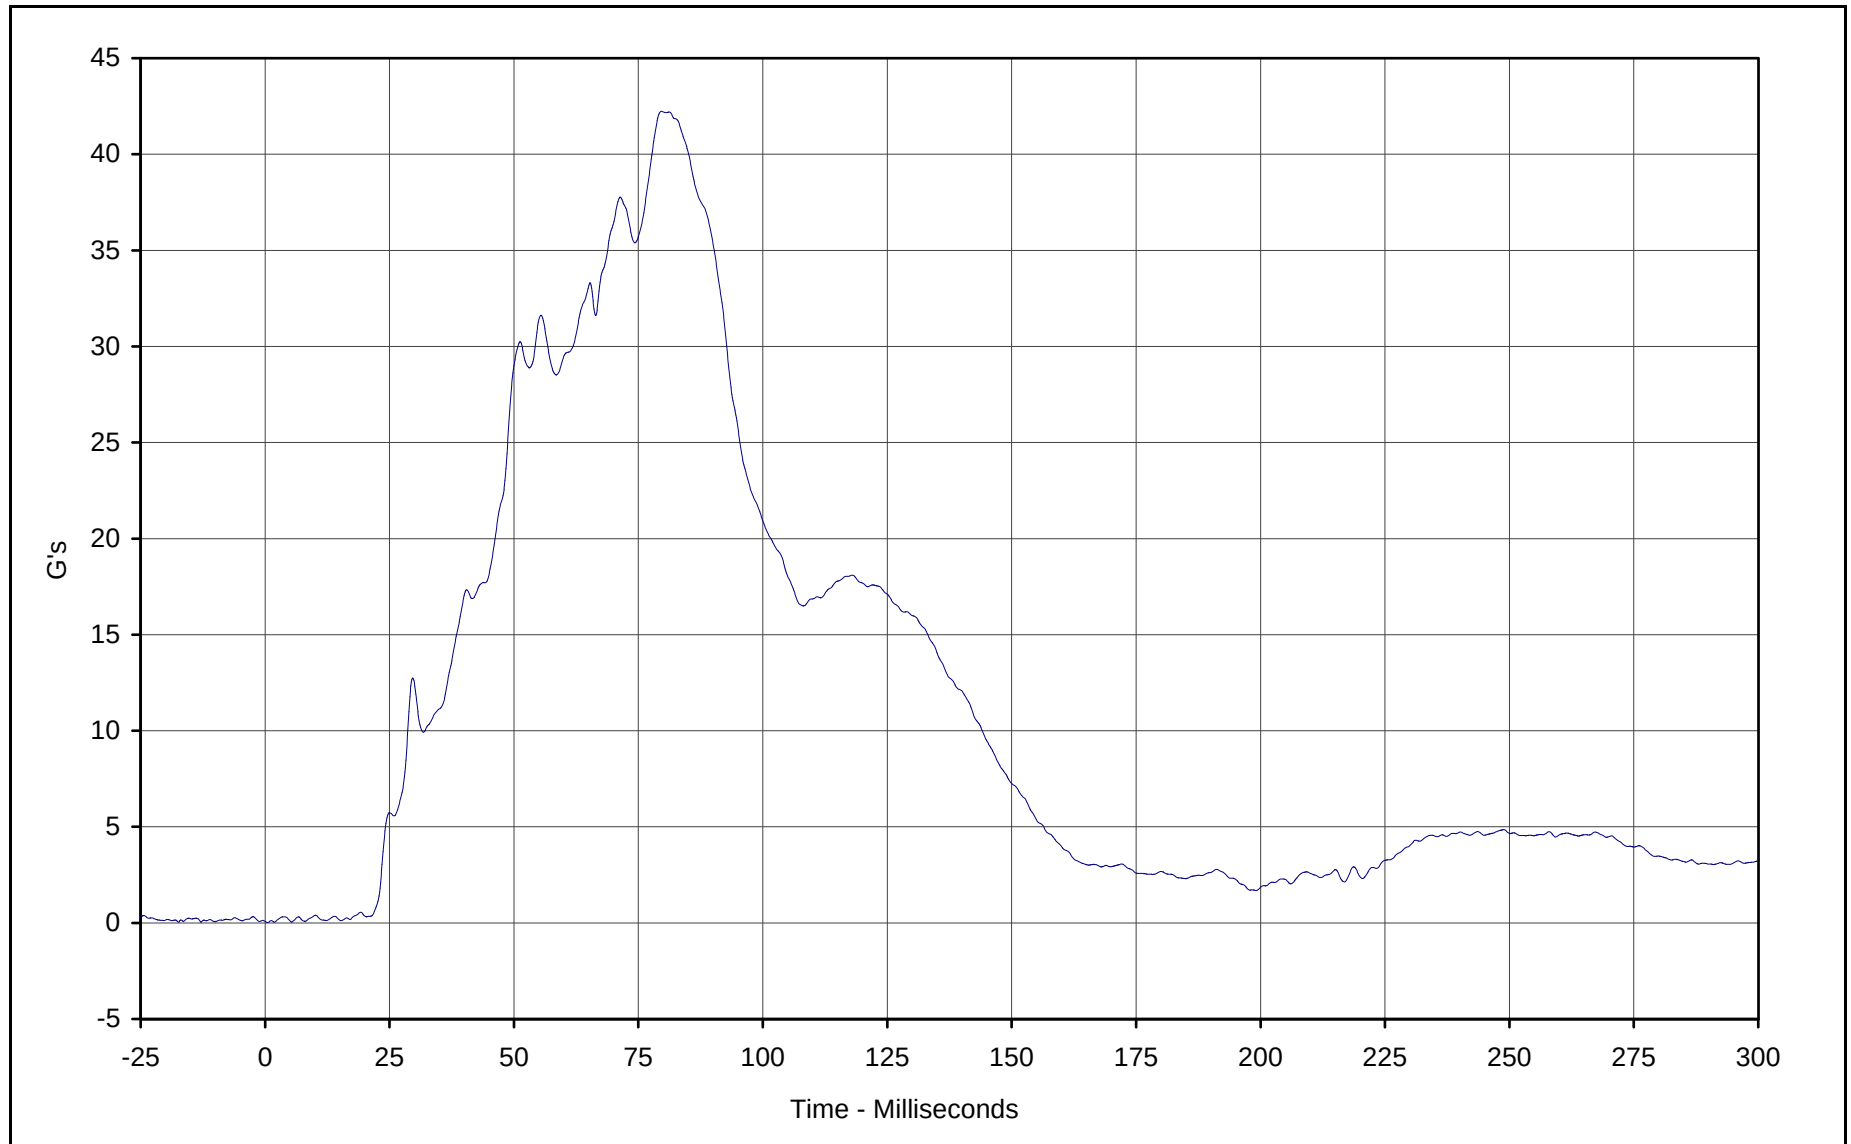


Curve Description: Passenger Chest Resultant Primary
Maximum Value: 42.2 at 79.6 Milliseconds
Minimum Value: 0.0 at 0.6 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: RES-057

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-88

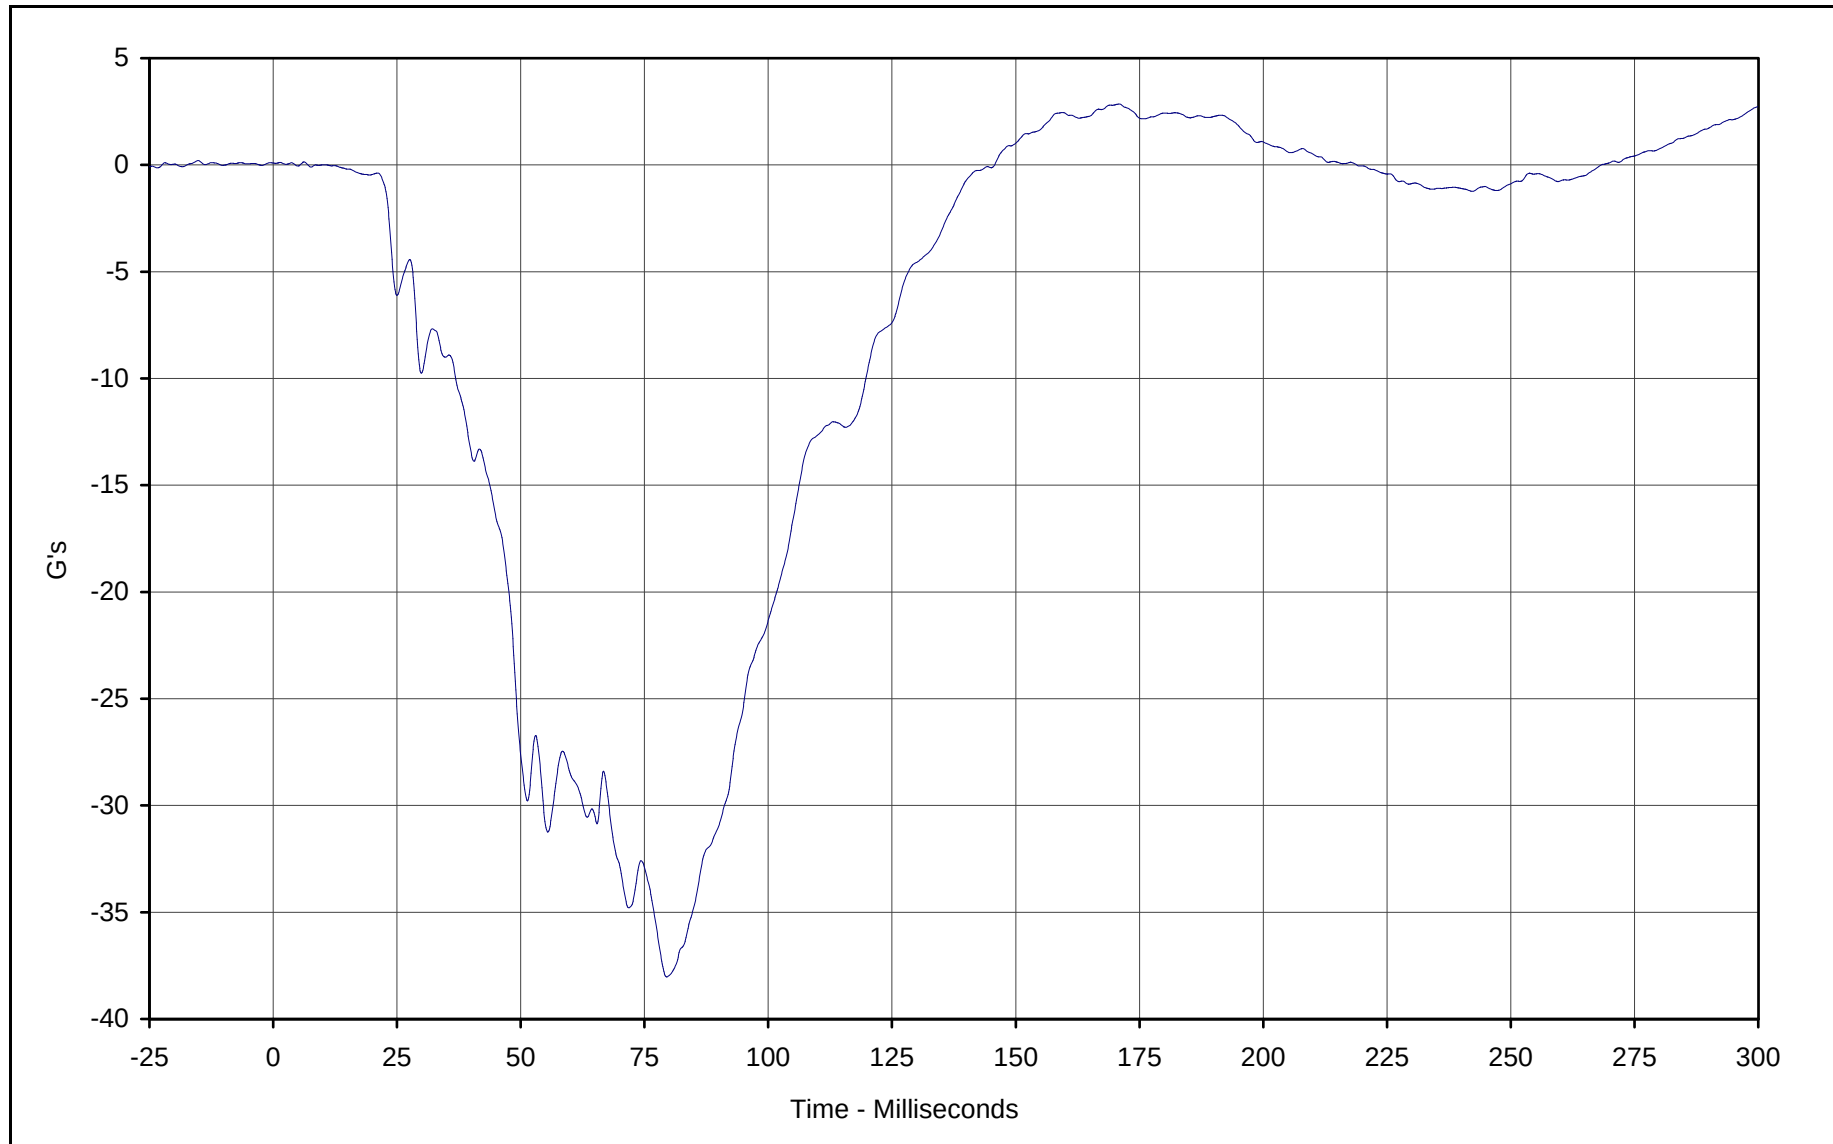


Curve Description: Passenger Chest Redundant X
Maximum Value: 2.9 at 170.9 Milliseconds
Minimum Value: -38.0 at 79.5 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: FIL-060

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

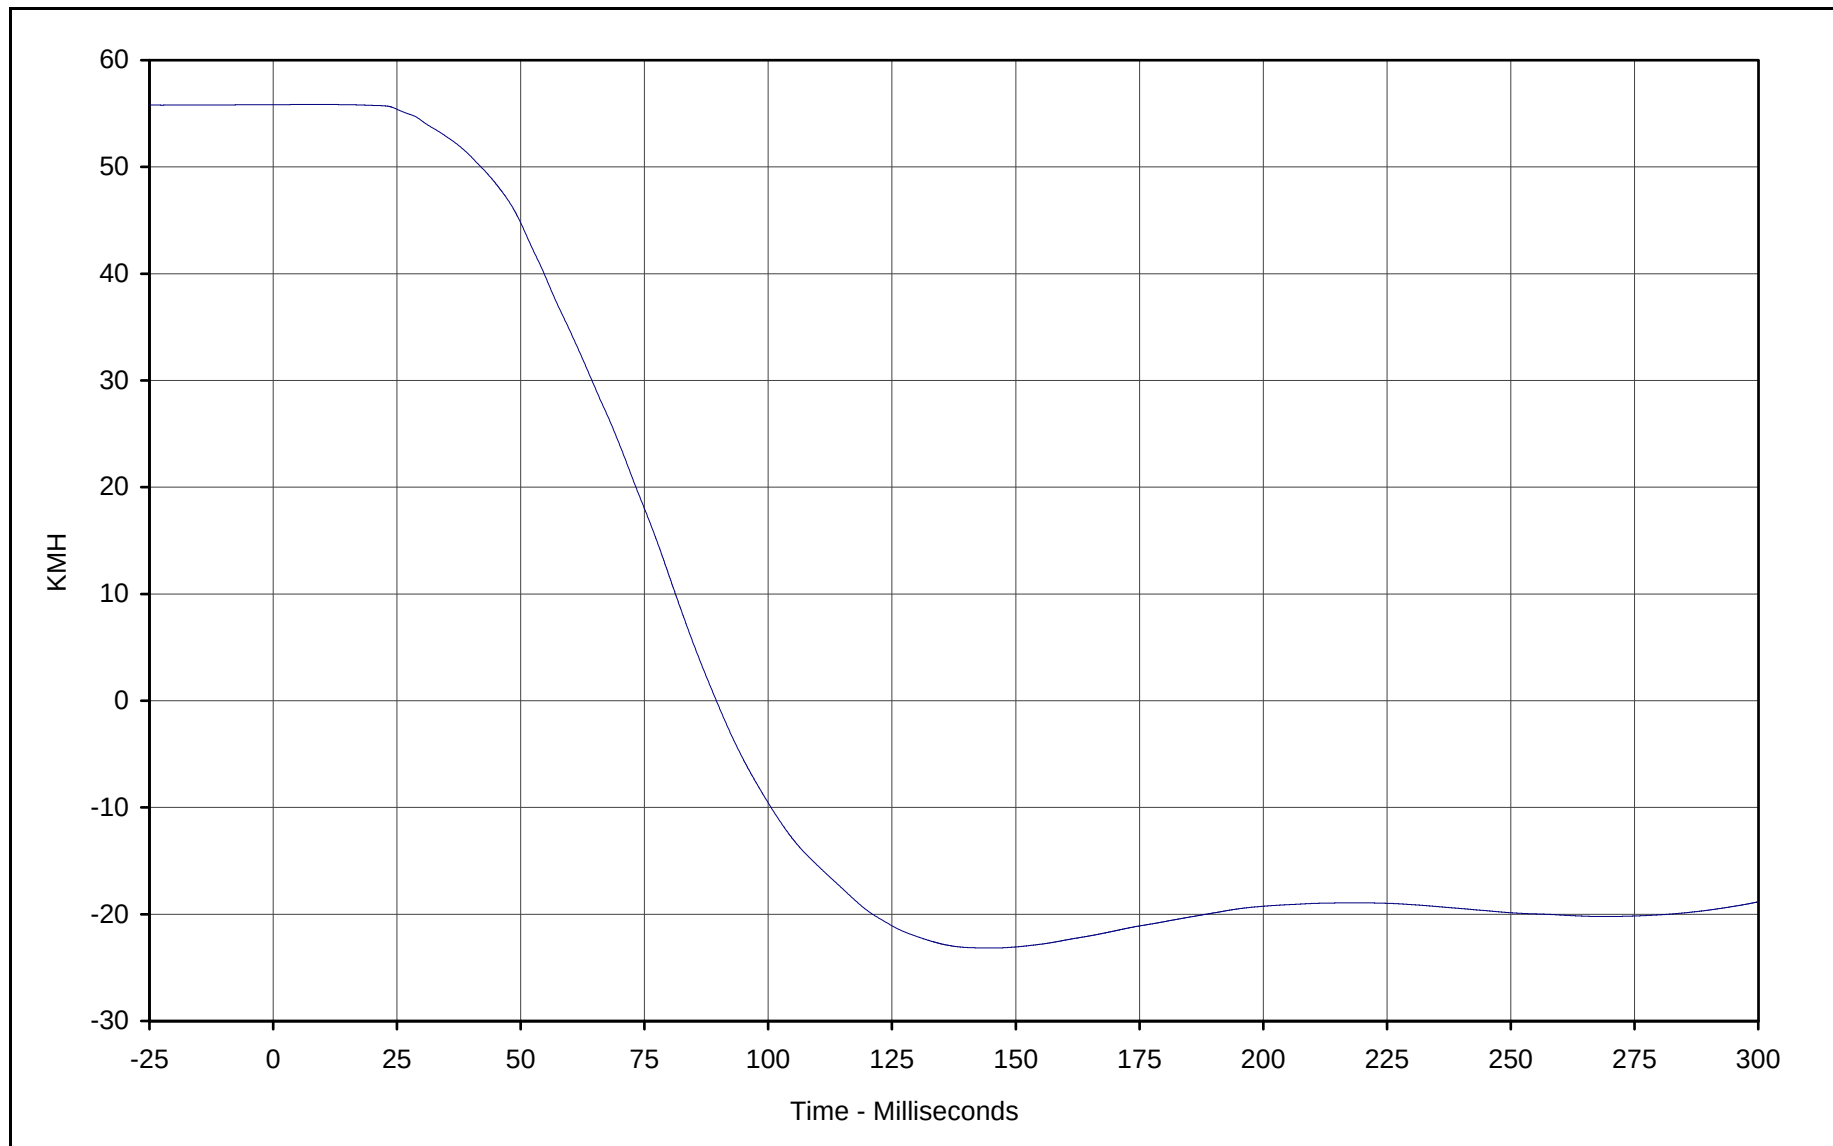

Curve Description: Passenger Chest Redundant X Velocity

Maximum Value: 55.8 at 7.0 Milliseconds

Minimum Value: -23.2 at 145.7 Milliseconds

SAE Filter Class: 180

Date of Test: 02/13/01


Curve Number: IN1-060

Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-90

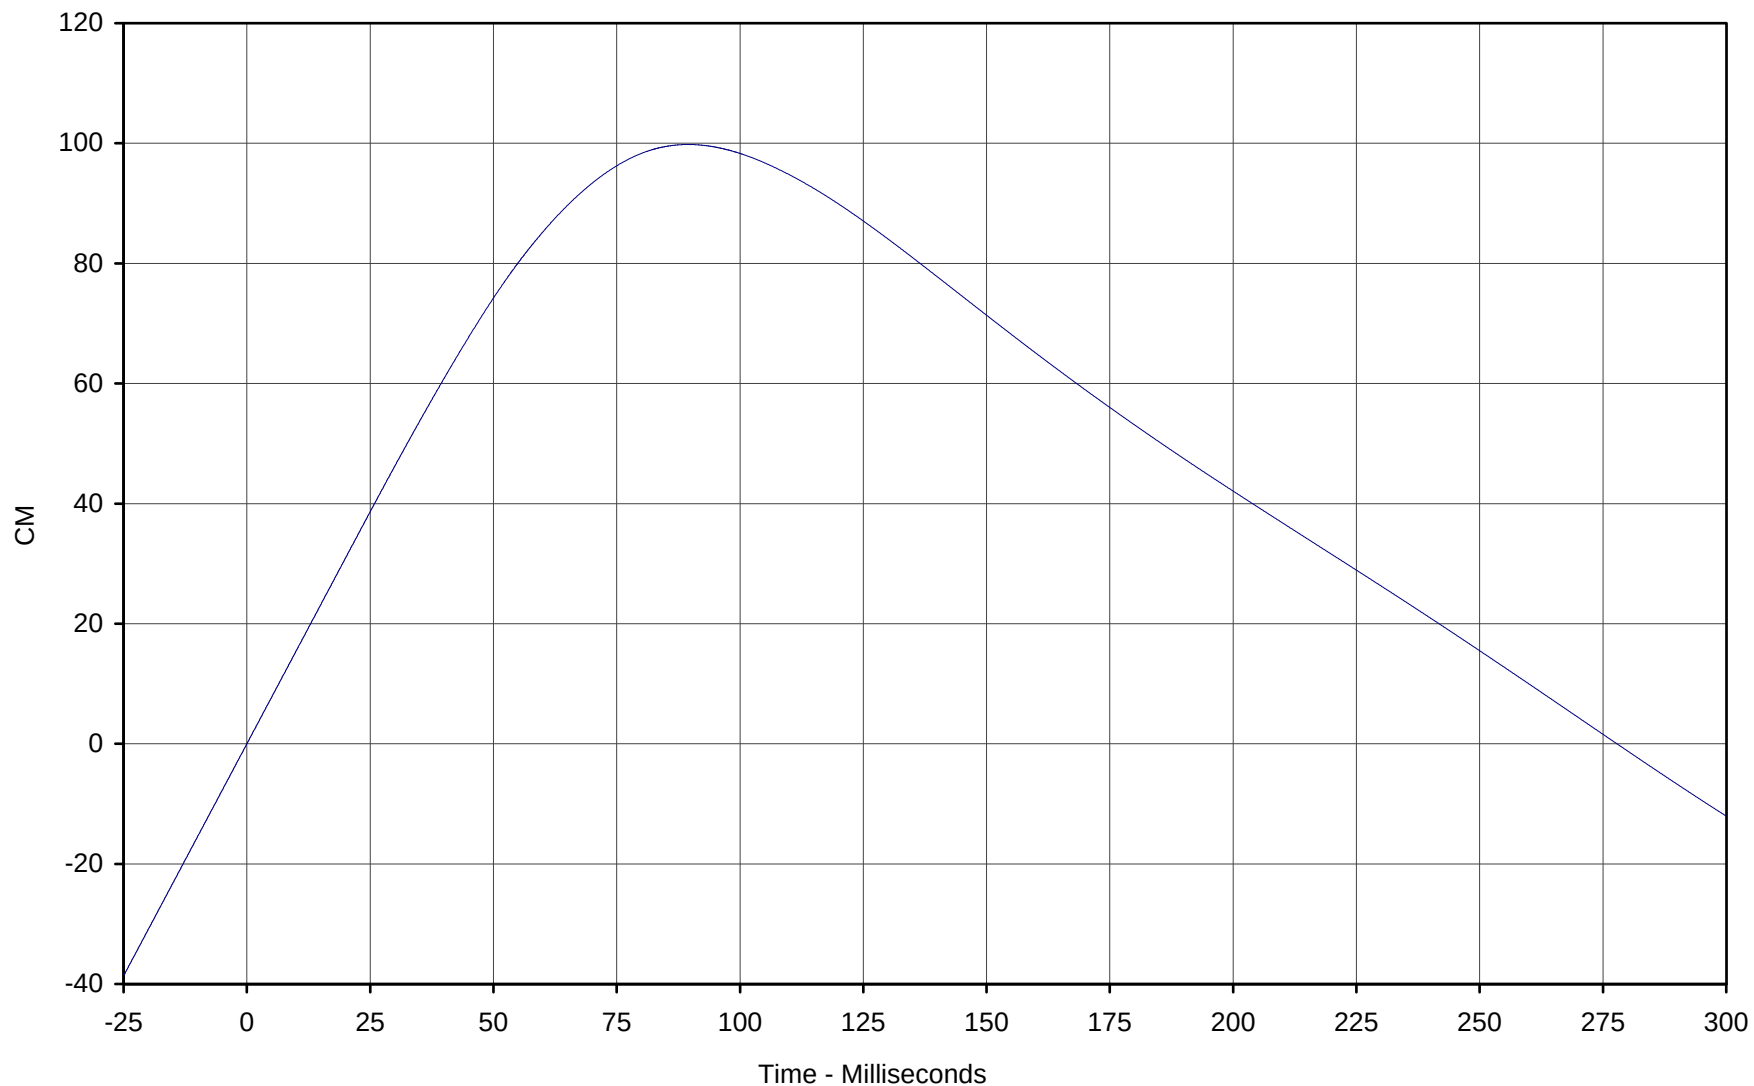

Curve Description: Passenger Chest Redundant X Displ.

Maximum Value: 99.8 at 89.5 Milliseconds

Minimum Value: -12.0 at 299.9 Milliseconds

SAE Filter Class: 180

Date of Test: 02/13/01

Curve Number: IN2-060


Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-91

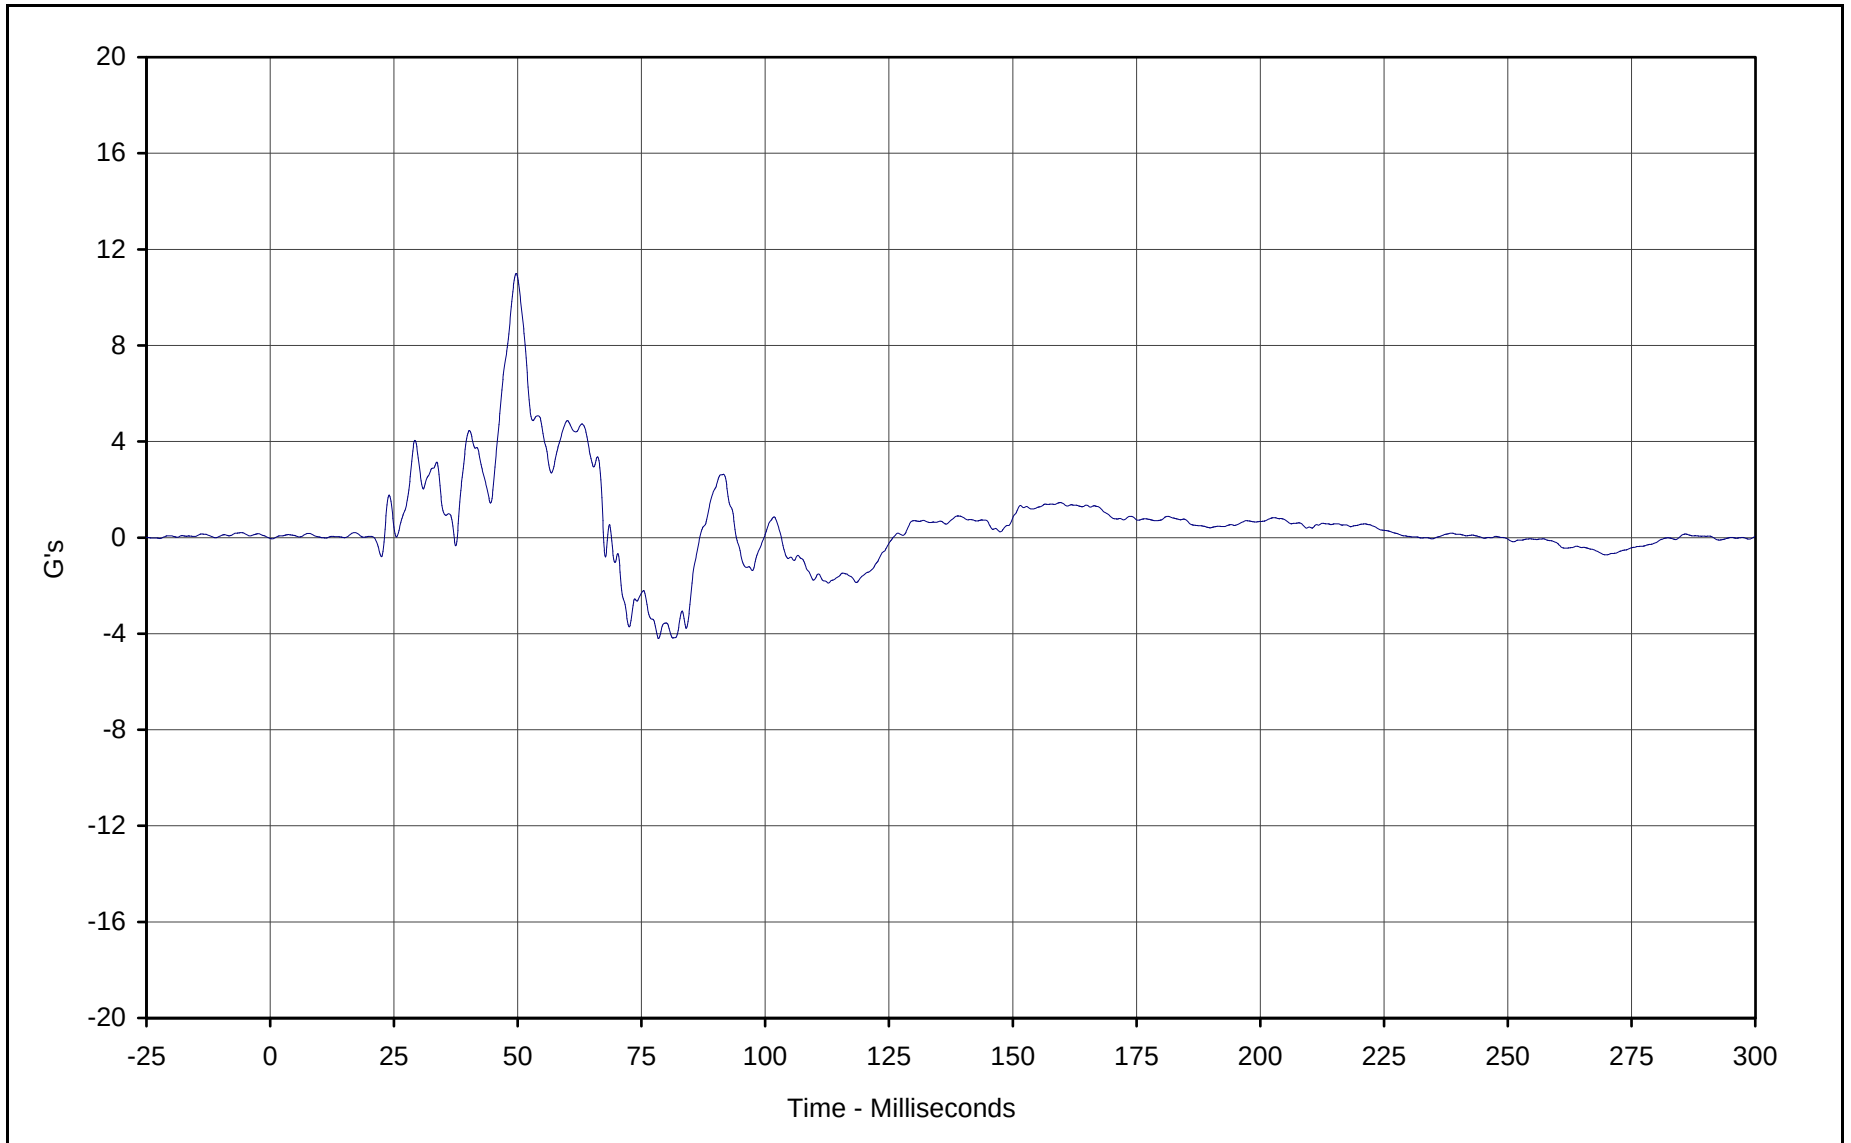


Curve Description: Passenger Chest Redundant Y
Maximum Value: 11.0 at 49.7 Milliseconds
Minimum Value: -4.2 at 78.5 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: FIL-061

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-92

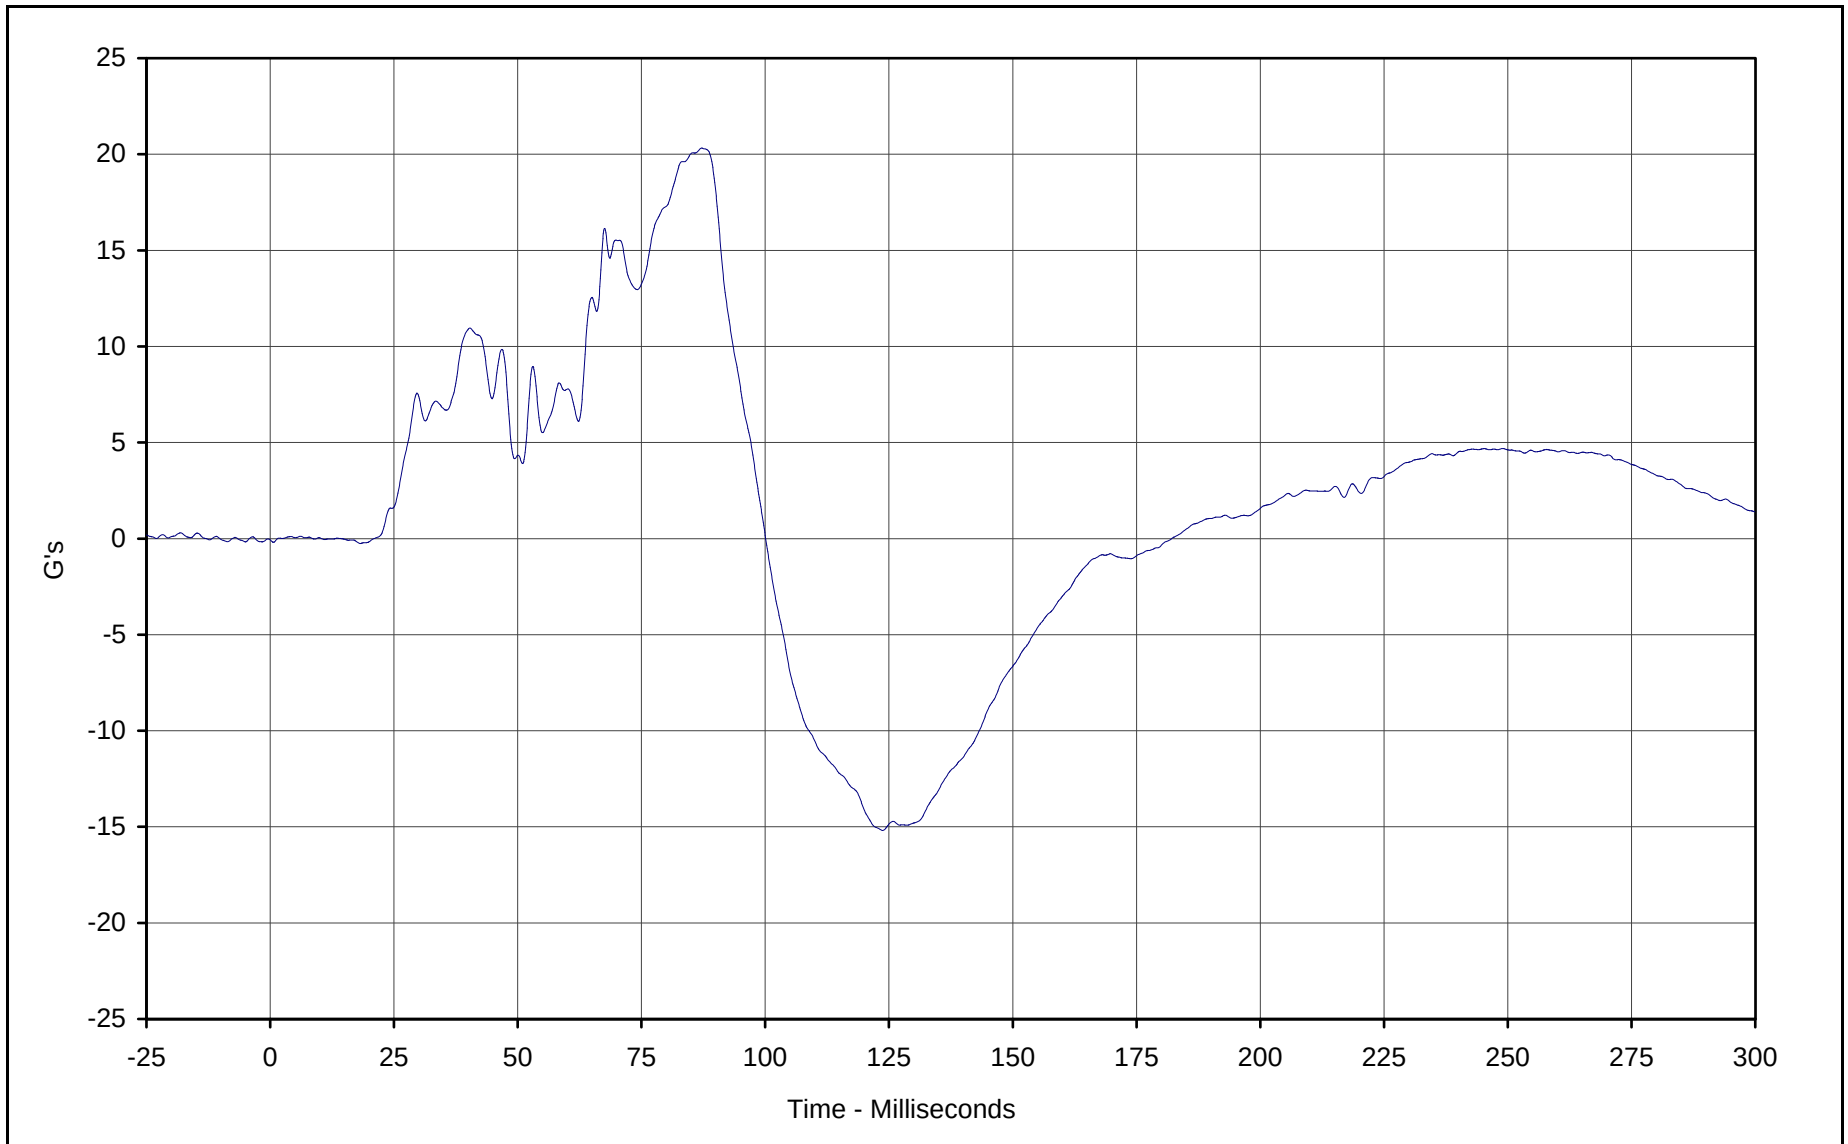


Curve Description: Passenger Chest Redundant Z
Maximum Value: 20.3 at 87.2 Milliseconds
Minimum Value: -15.2 at 123.7 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: FIL-062

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-93

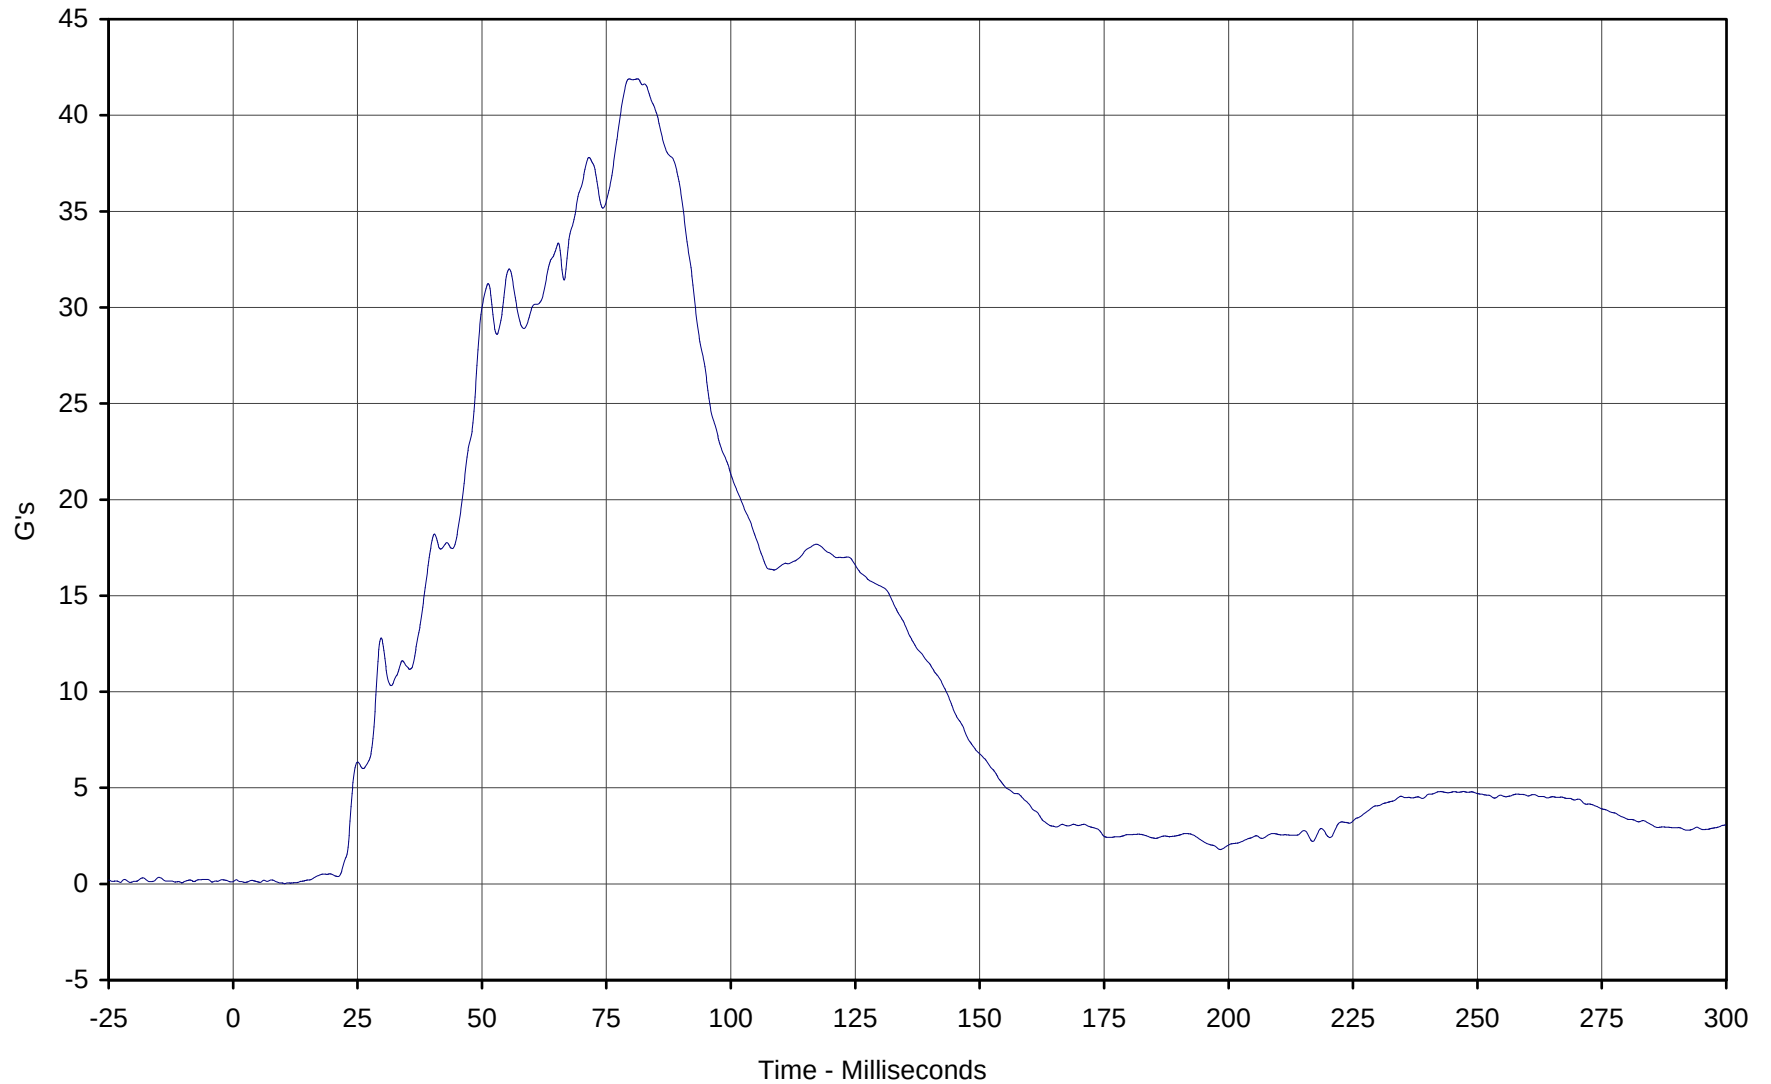

Curve Description: Passenger Chest Resultant Redundant

Maximum Value: 41.9 at 79.6 Milliseconds

Minimum Value: 0.0 at 10.4 Milliseconds

SAE Filter Class: 180

Date of Test: 02/13/01


Curve Number: RES-060

Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

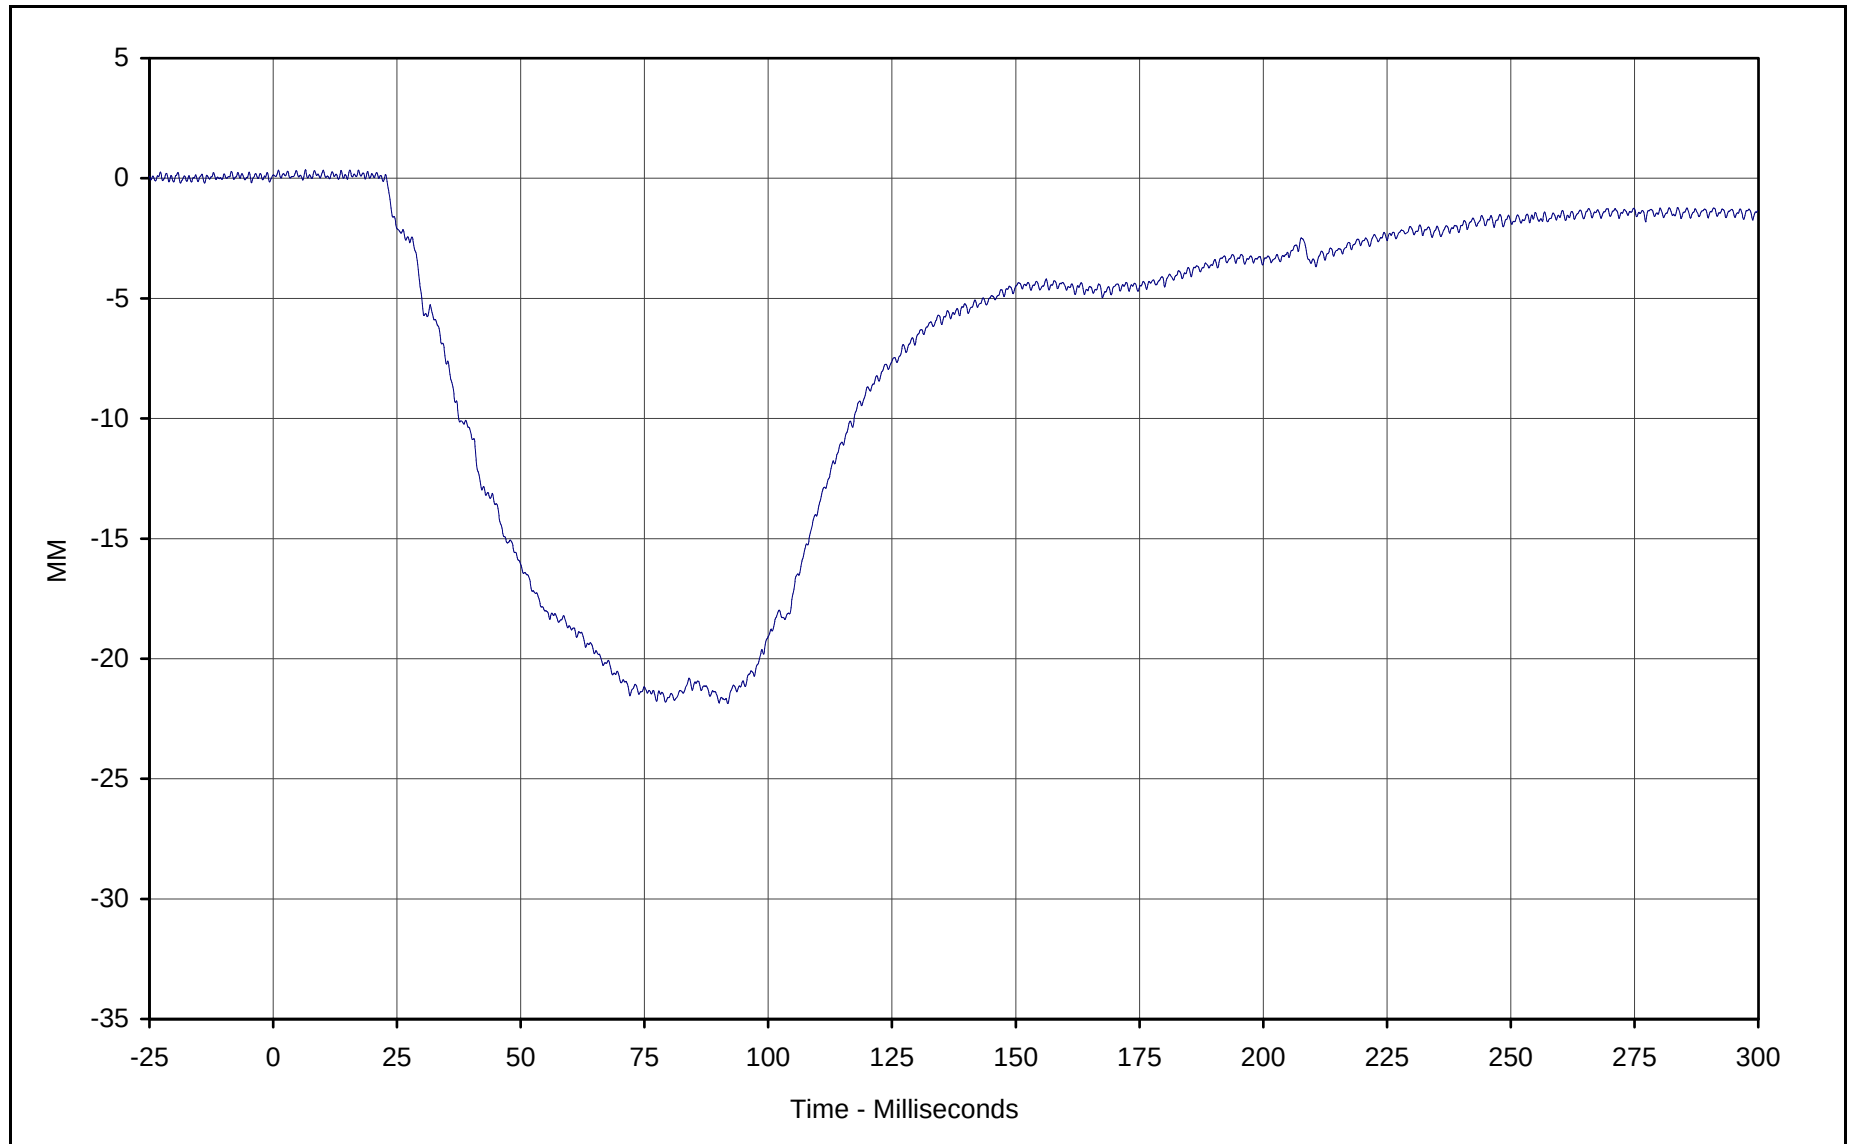


Curve Description: Passenger Chest Displacement X
Maximum Value: 0.4 at 6.5 Milliseconds
Minimum Value: -21.9 at 91.8 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: FIL-063

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-95

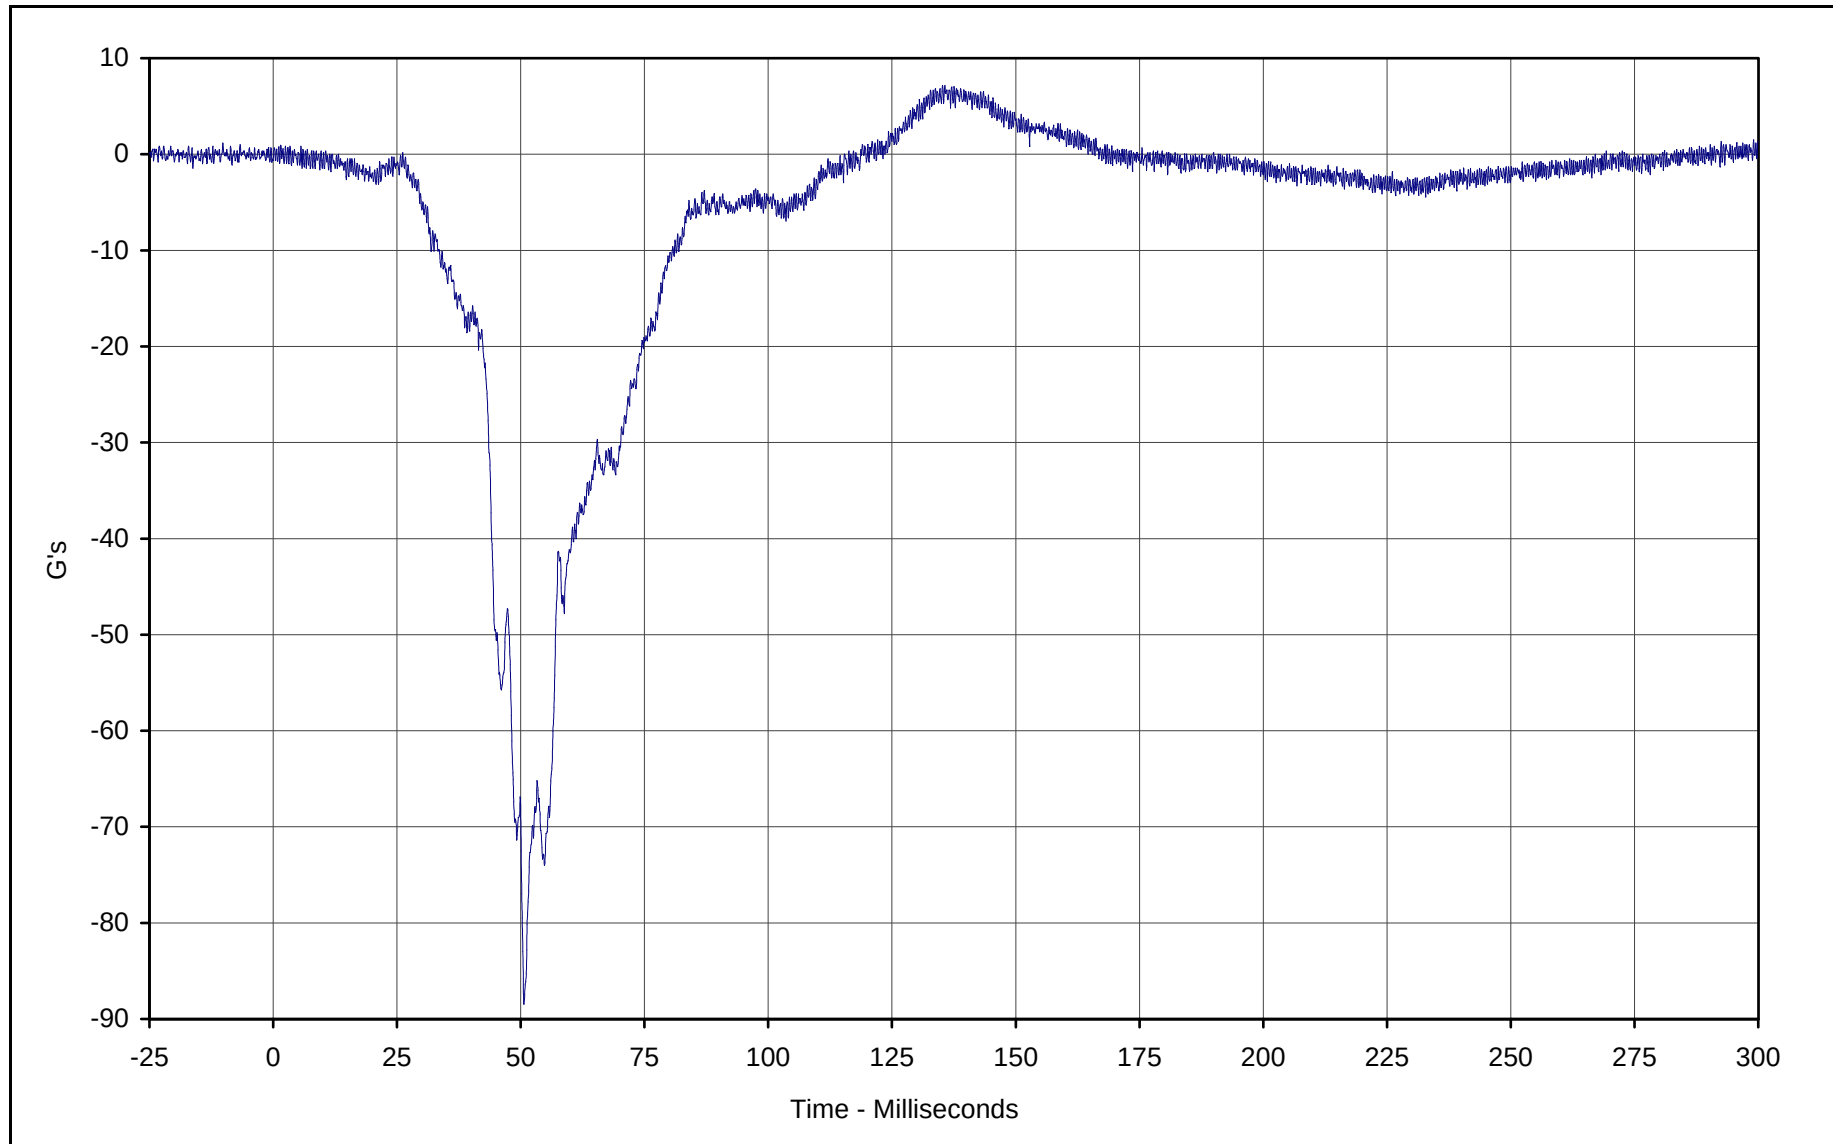

Curve Description: Passenger Pelvis X

Maximum Value: 7.2 at 135.2 Milliseconds

Minimum Value: -88.4 at 50.6 Milliseconds

SAE Filter Class: 1000

Date of Test: 02/13/01


Curve Number: FIL-064

Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

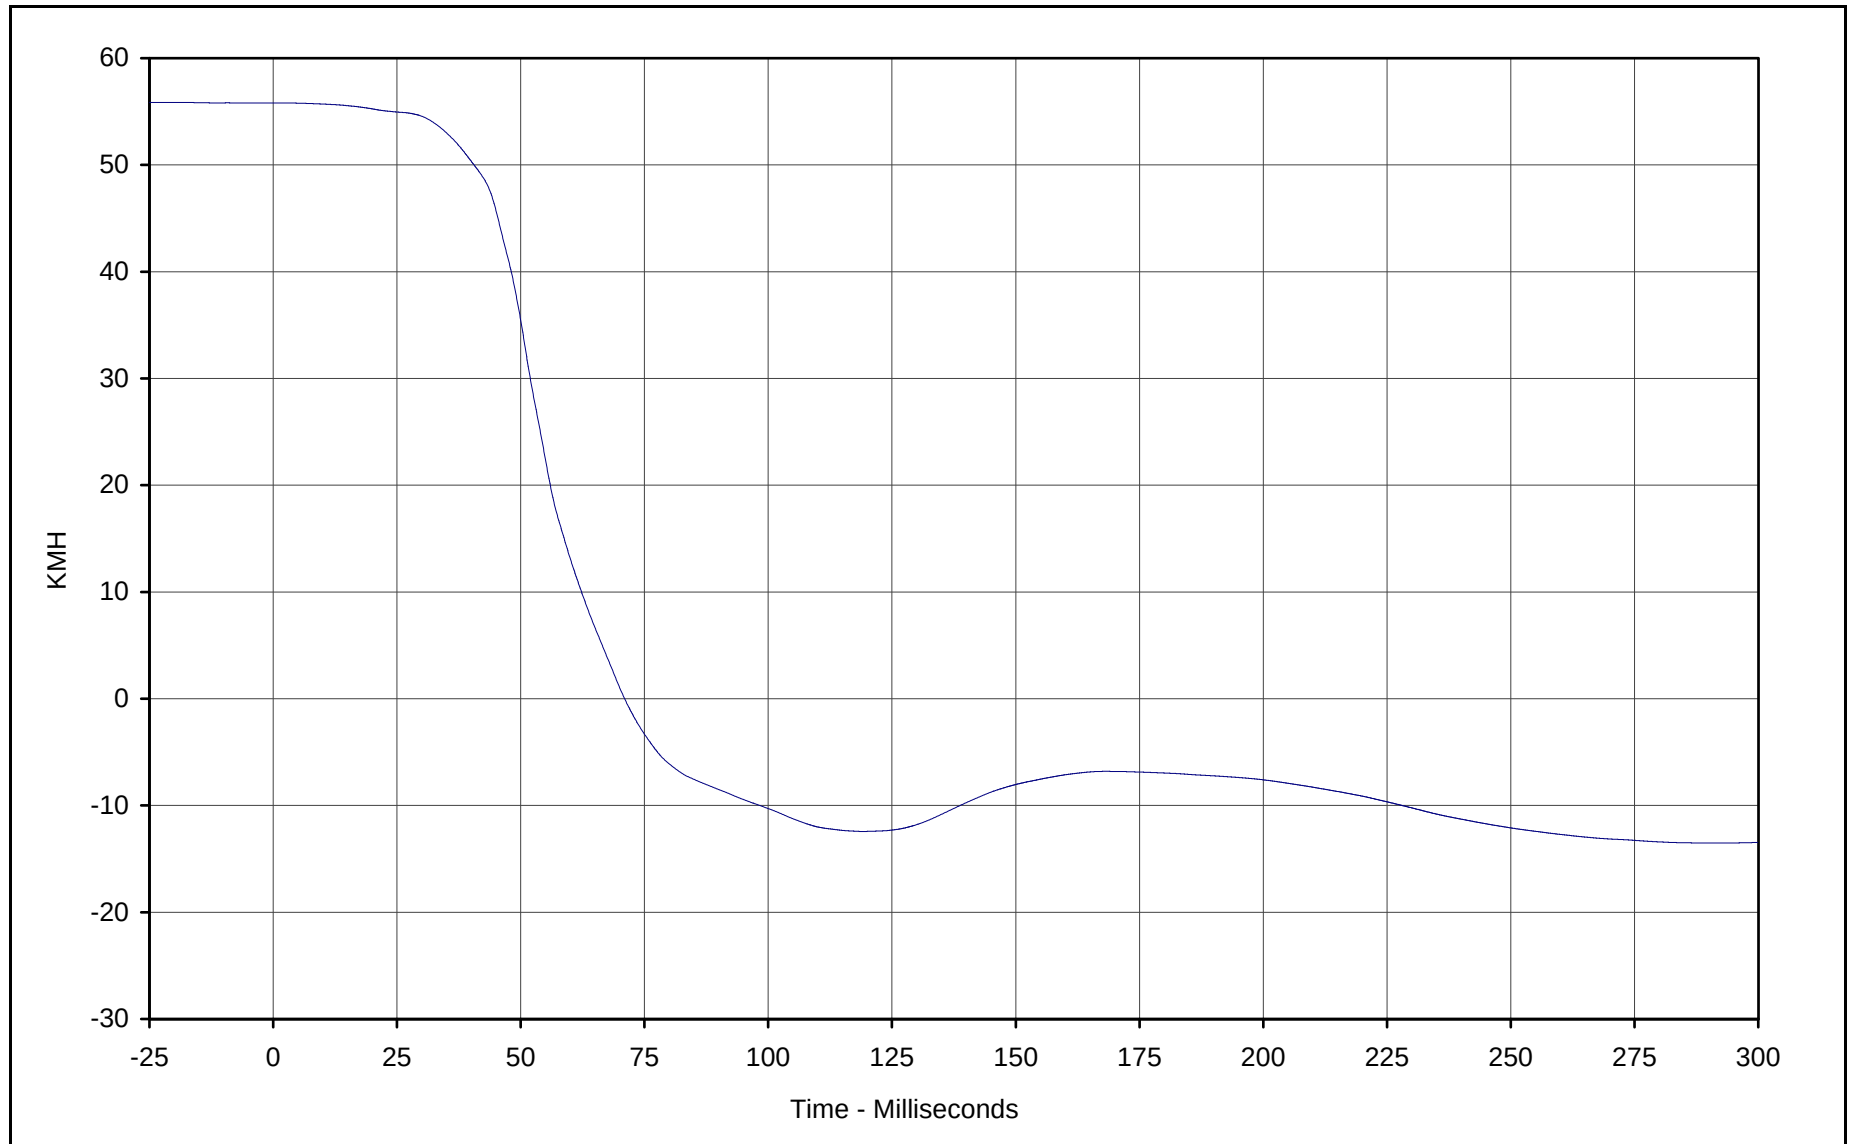


Curve Description: Passenger Pelvis X Velocity
Maximum Value: 55.8 at 0.0 Milliseconds
Minimum Value: -13.5 at 291.2 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: IN1-064

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-97

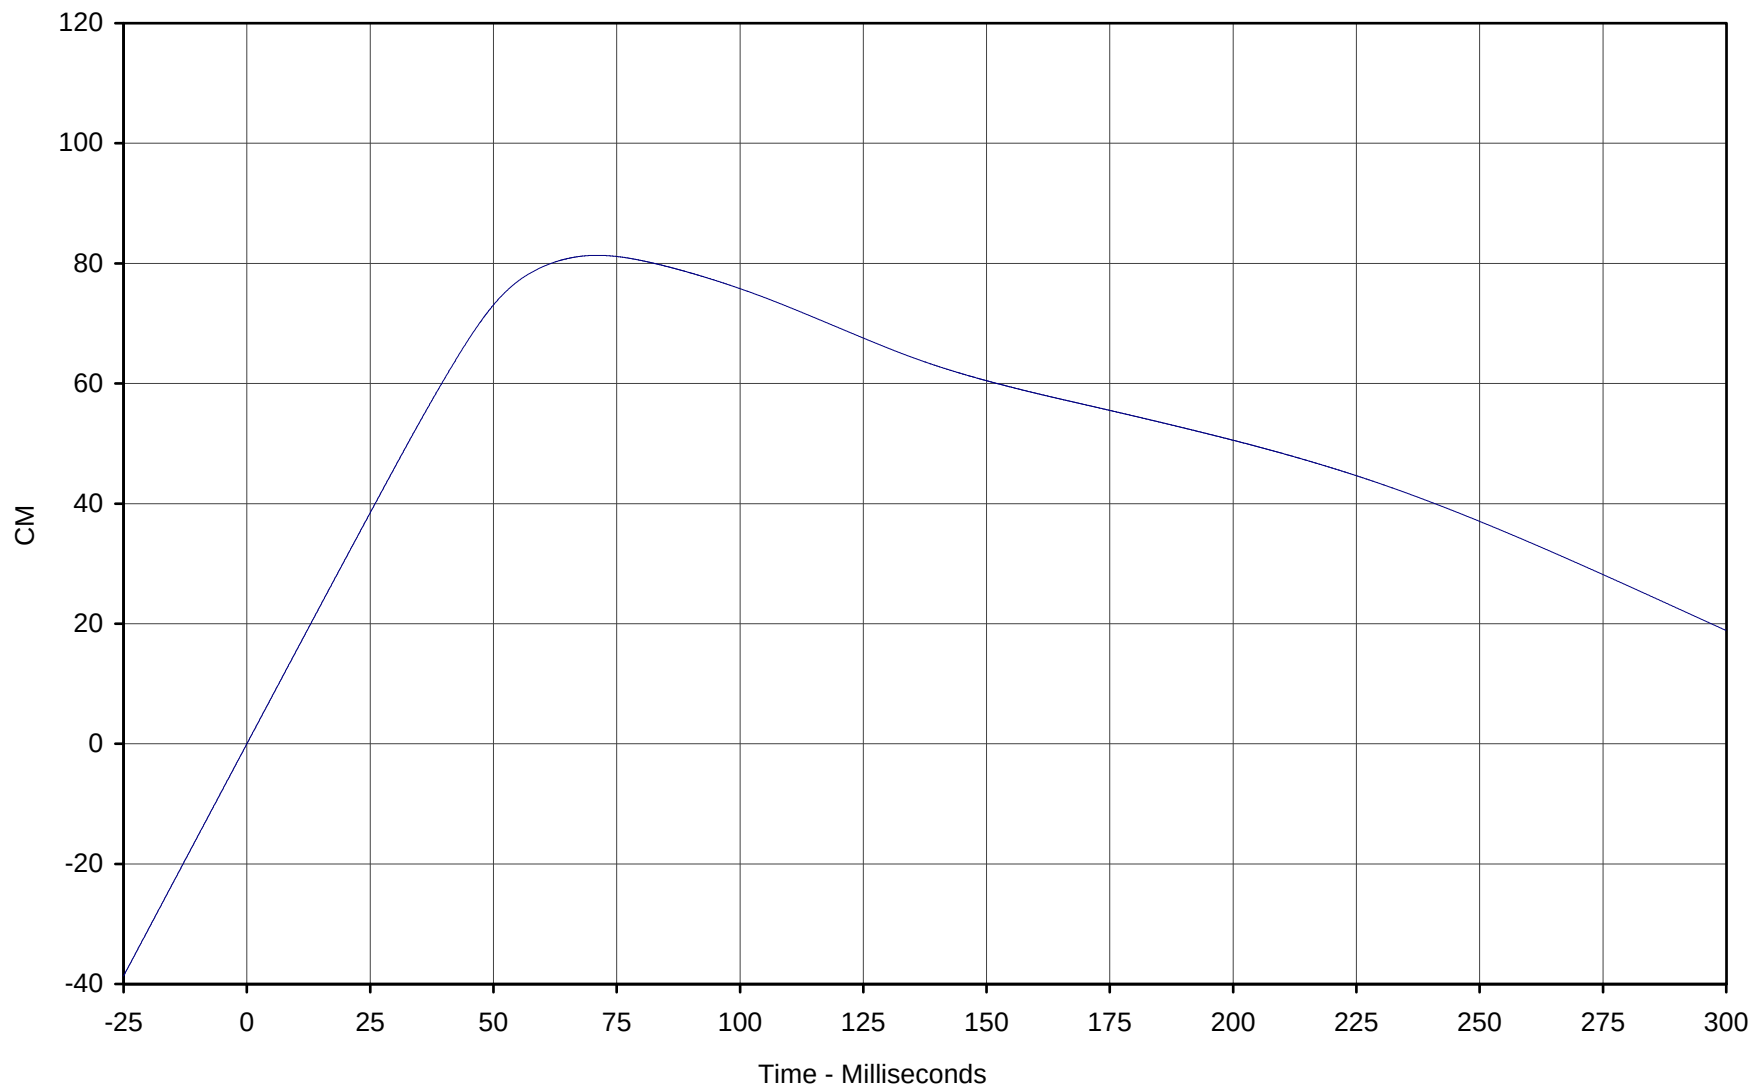


Curve Description: Passenger Pelvis X Displ.
Maximum Value: 81.3 at 71.0 Milliseconds
Minimum Value: 0.0 at 0.0 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: IN2-064

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-98

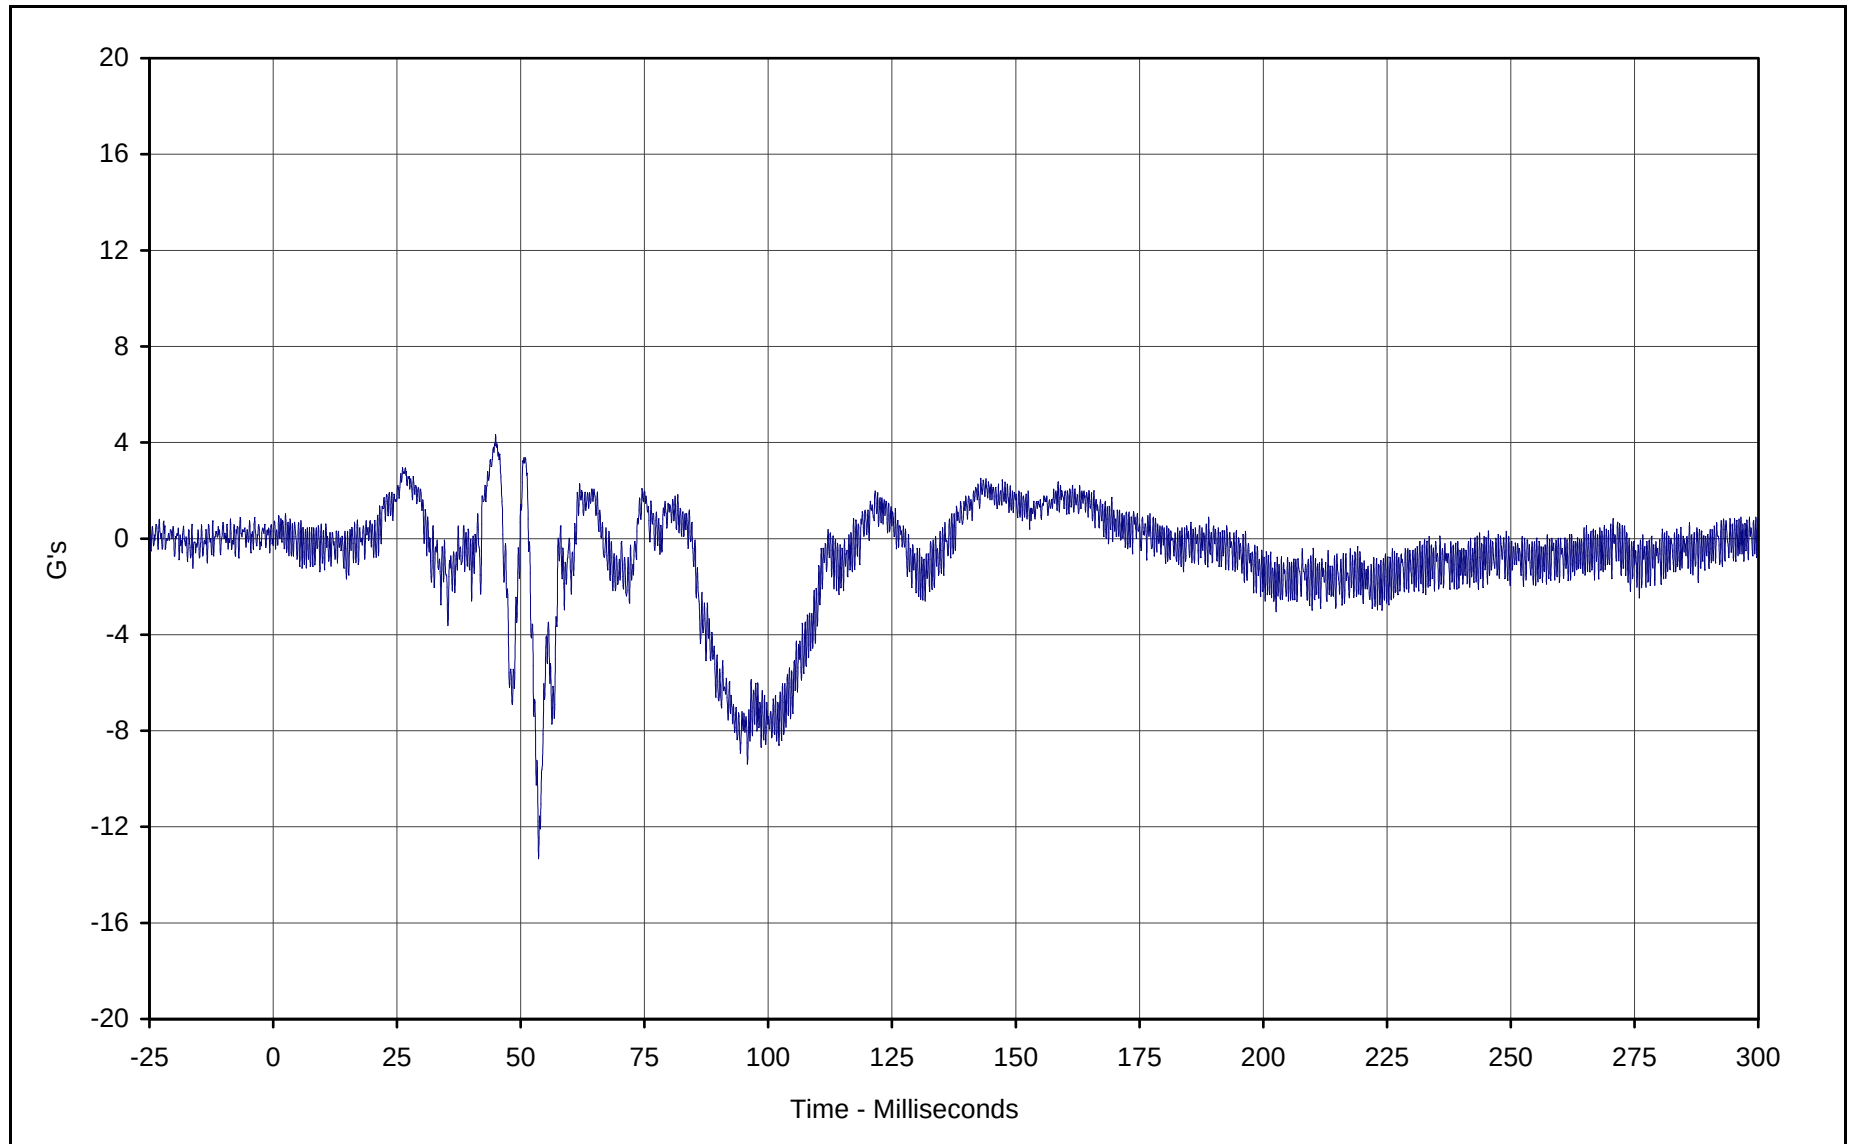


Curve Description: Passenger Pelvis Y
Maximum Value: 4.3 at 44.9 Milliseconds
Minimum Value: -13.3 at 53.6 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: FIL-065

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-99

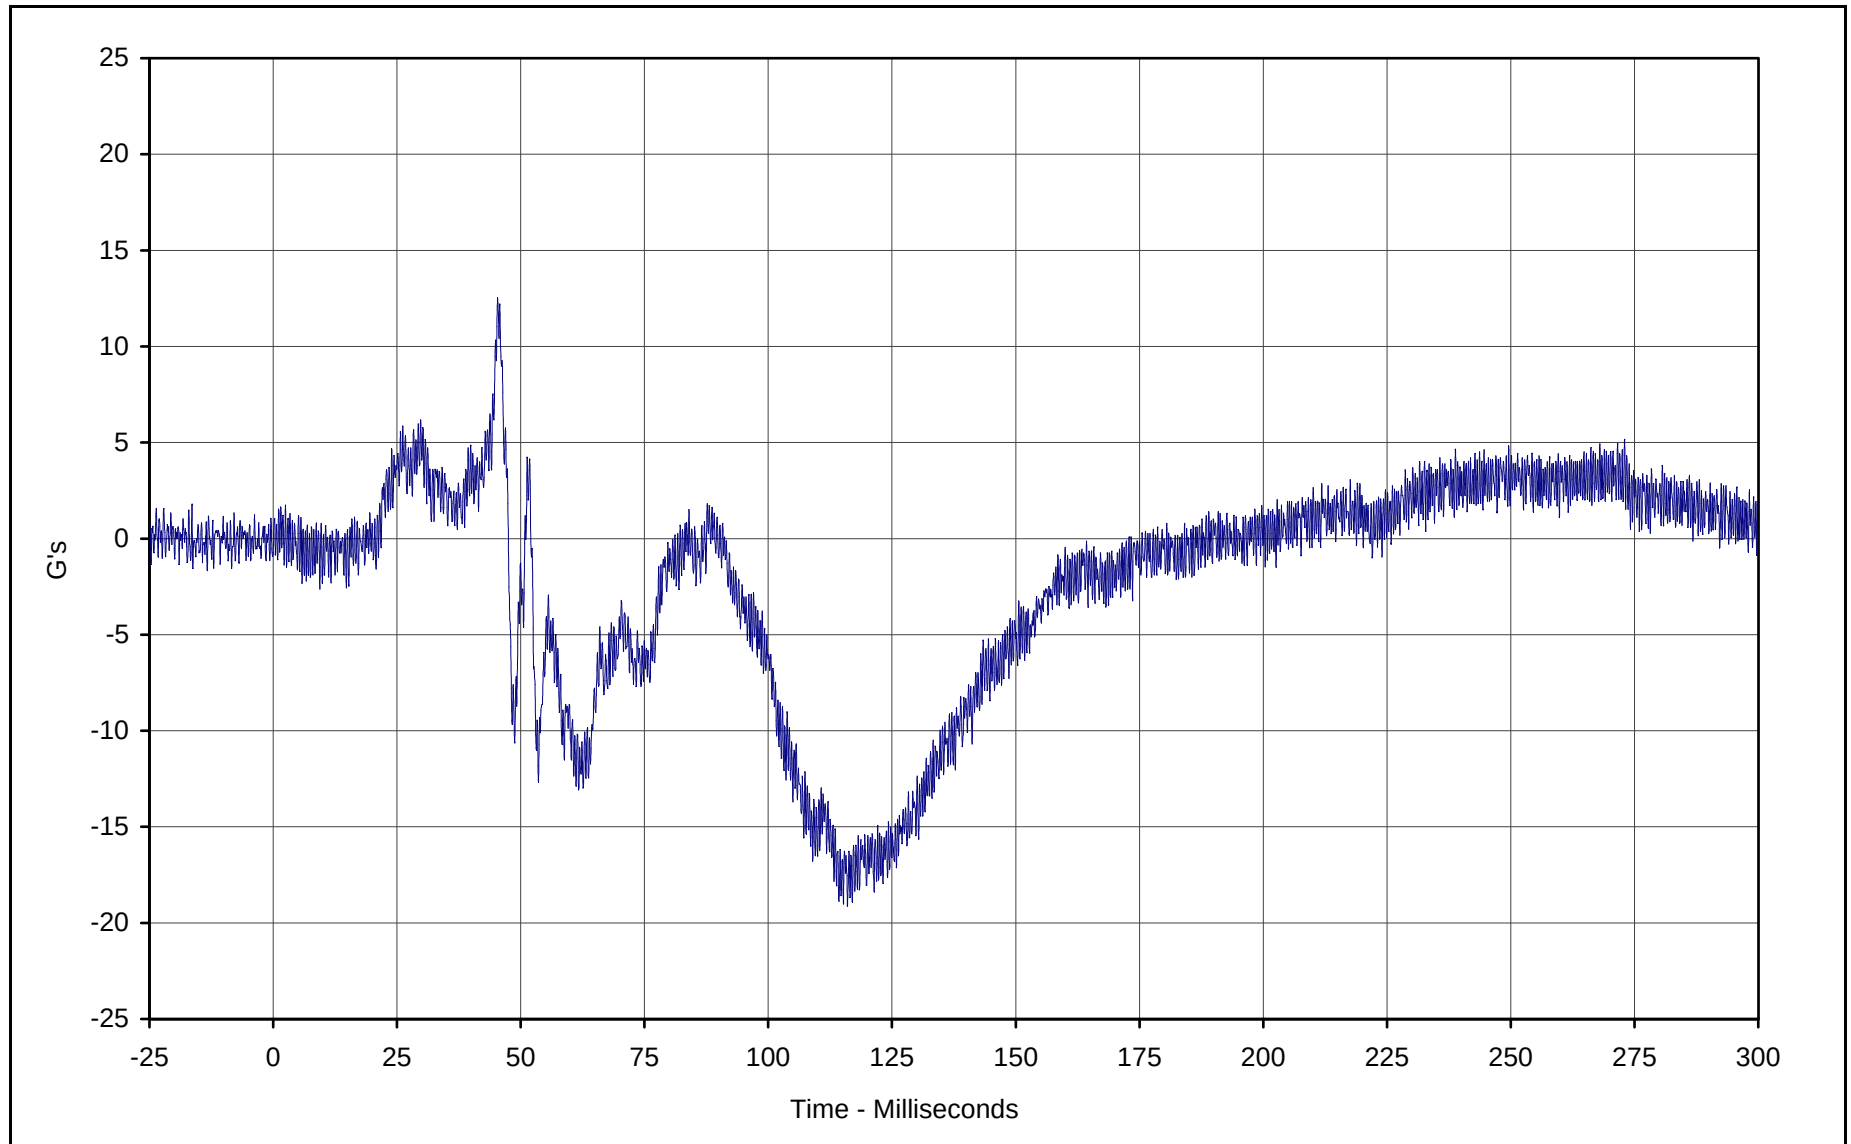


Curve Description: Passenger Pelvis Z
Maximum Value: 12.5 at 45.3 Milliseconds
Minimum Value: -19.1 at 116.0 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: FIL-066

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-100

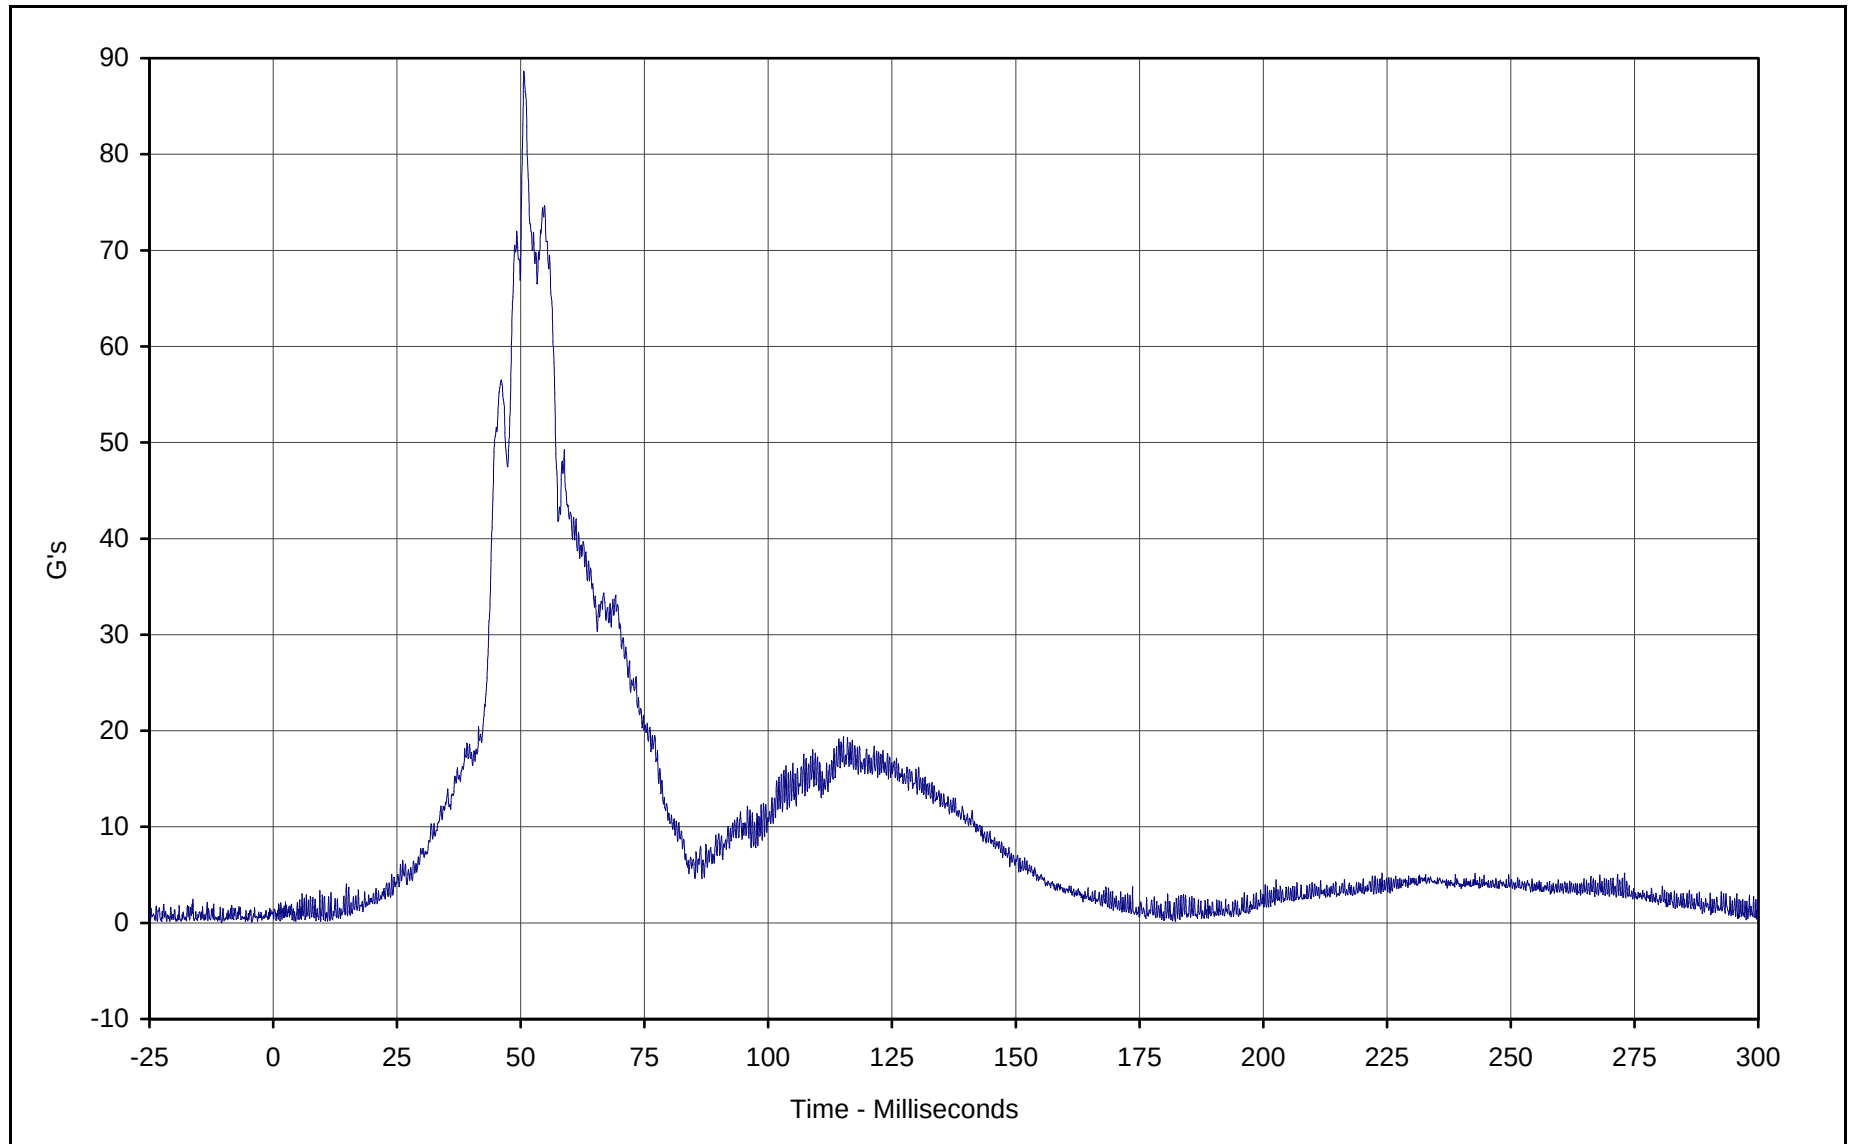


Curve Description: Passenger Pelvis Resultant
Maximum Value: 88.6 at 50.6 Milliseconds
Minimum Value: 0.2 at 182.3 Milliseconds
SAE Filter Class: 1000
Date of Test: 02/13/01
Curve Number: RES-064

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-101

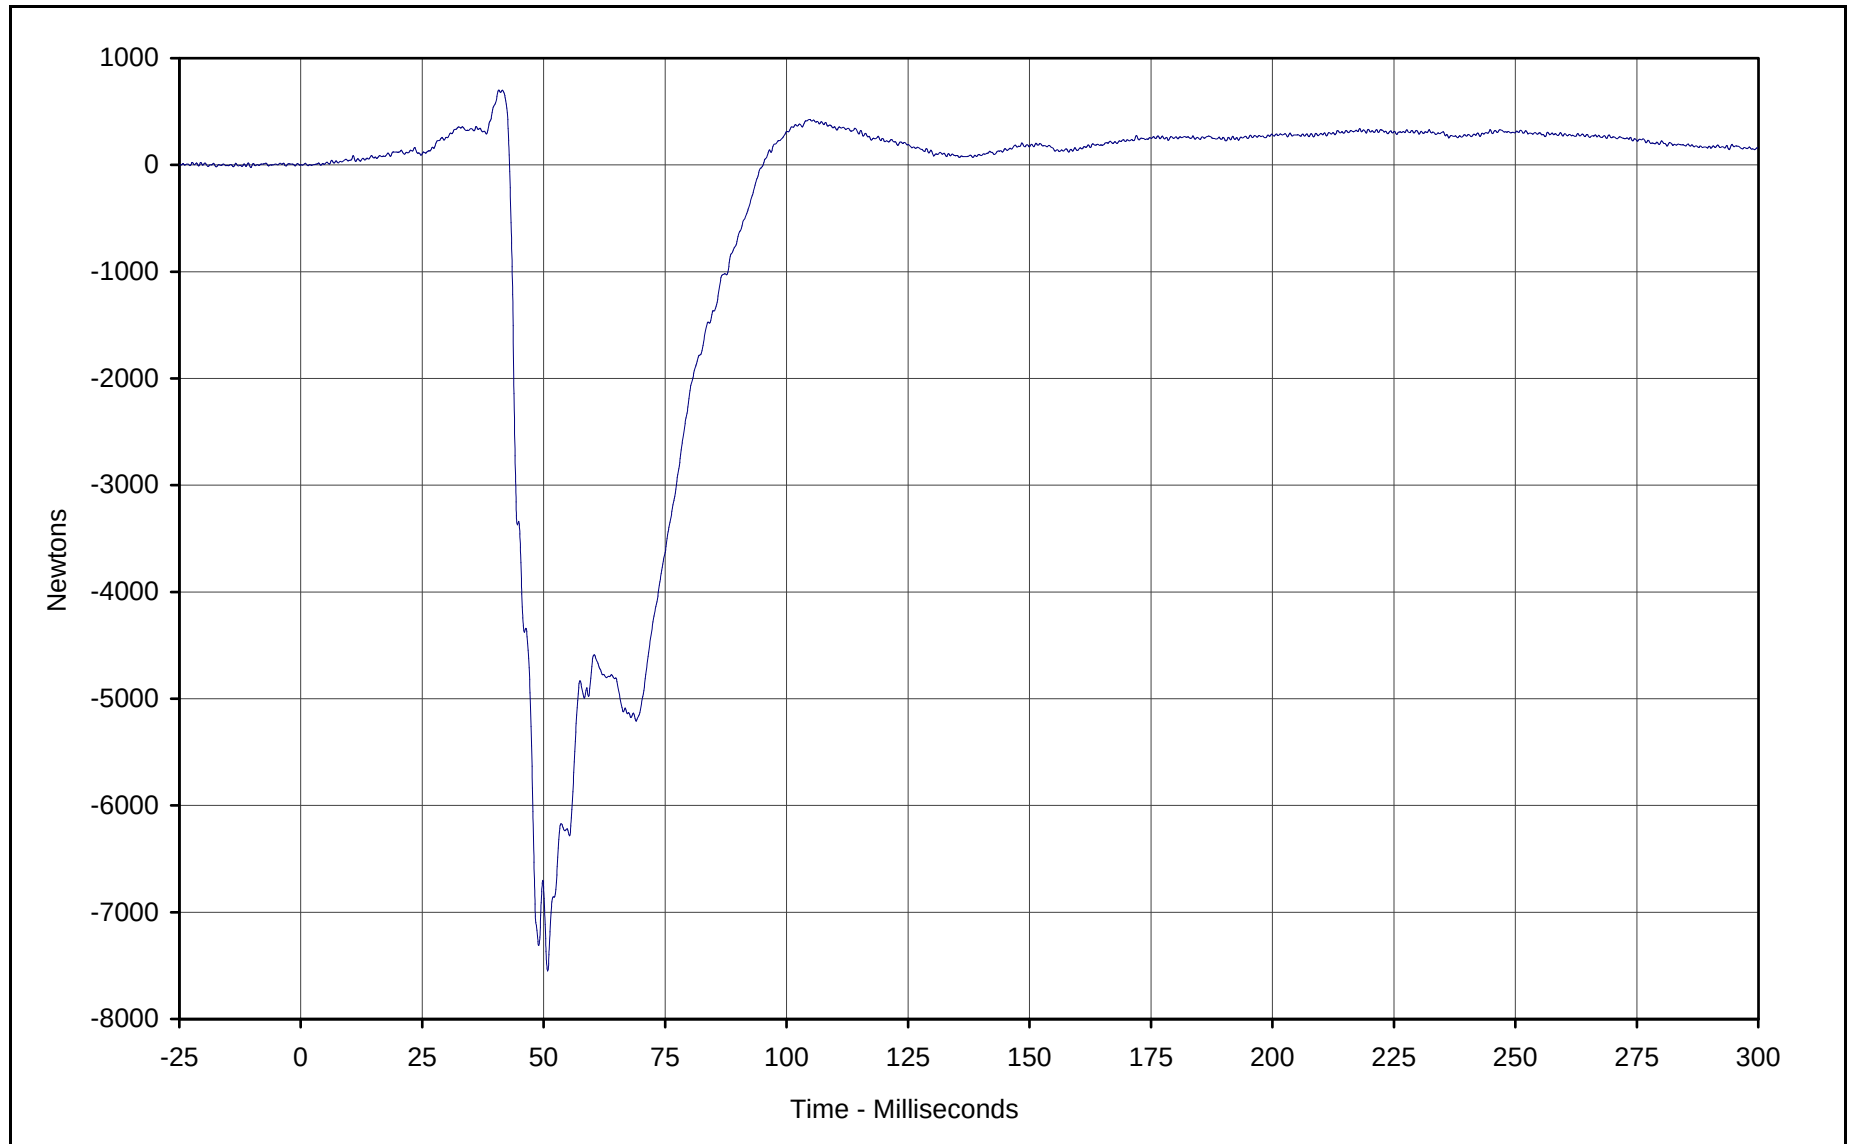


Curve Description: Passenger Left Femur Force
Maximum Value: 700.4 at 40.7 Milliseconds
Minimum Value: -7549.5 at 50.8 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: FIL-067

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

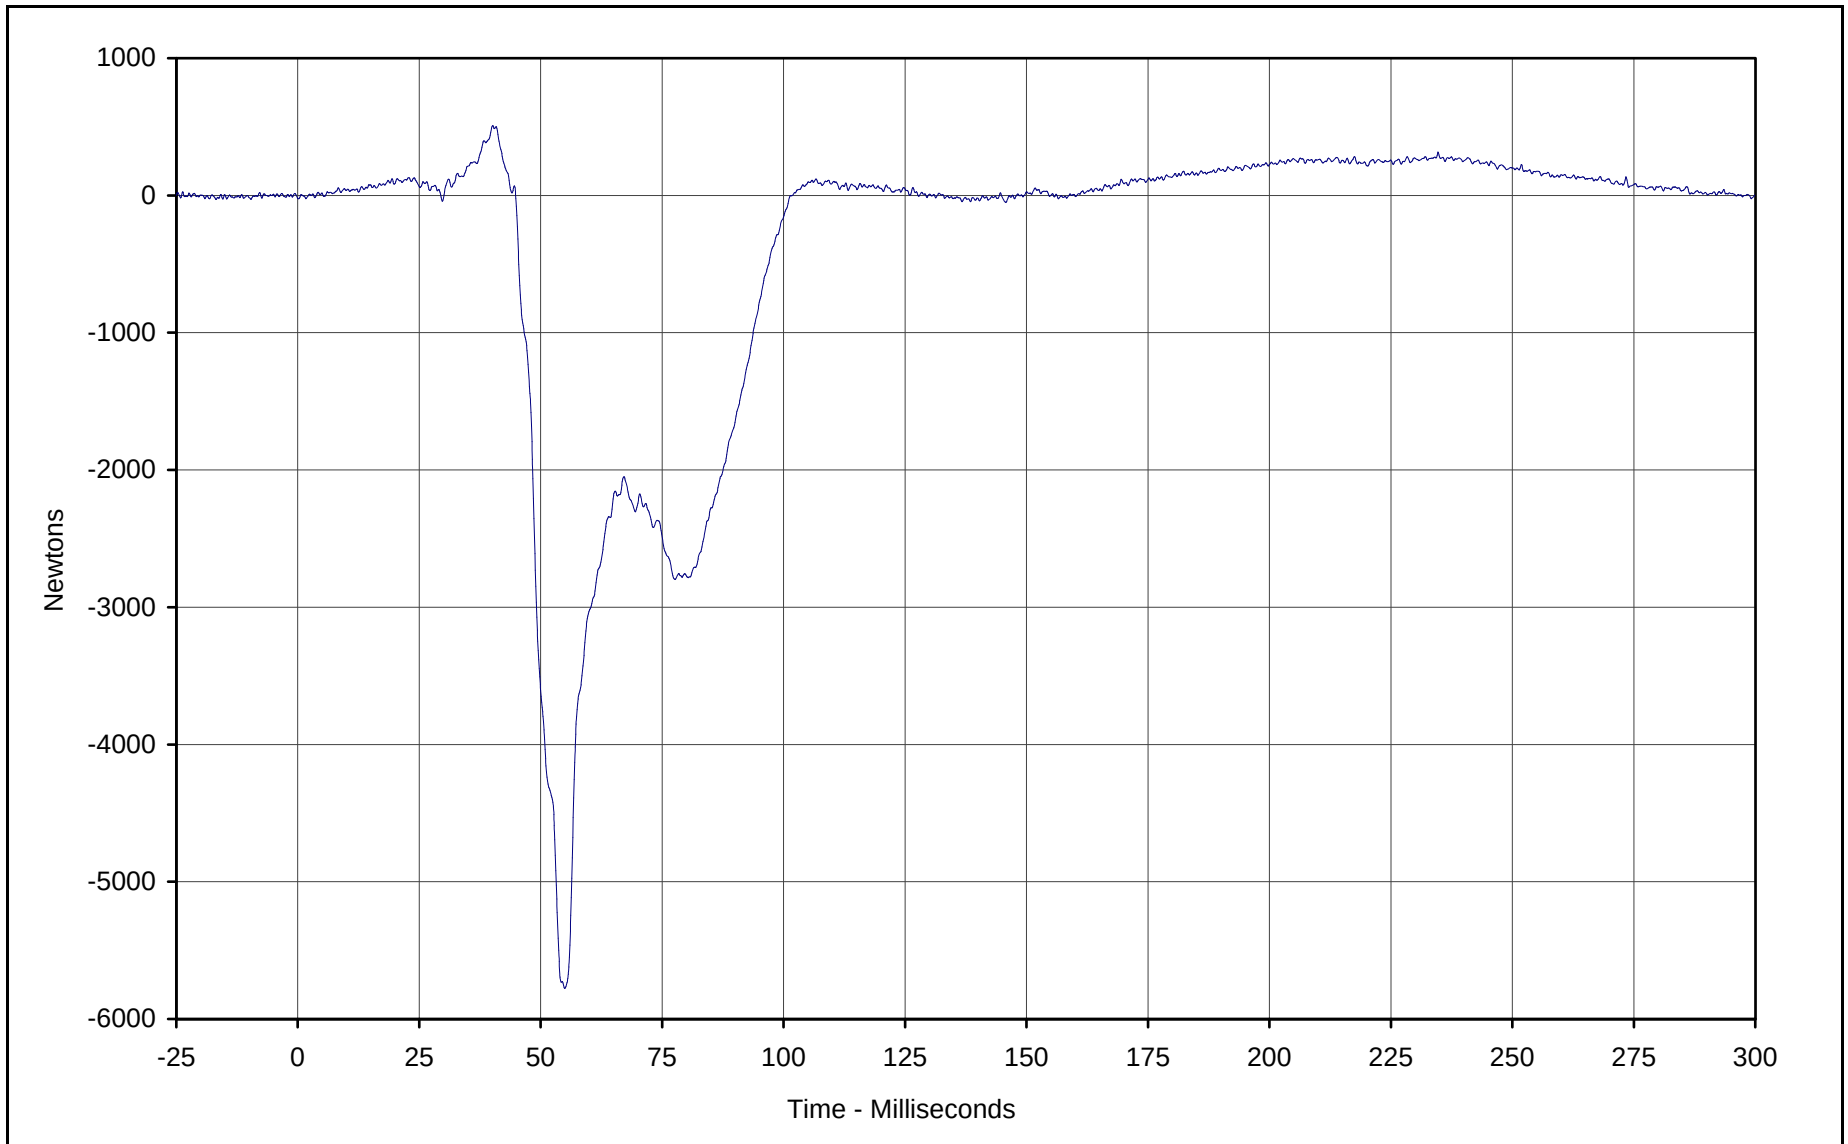


Curve Description: Passenger Right Femur Force
Maximum Value: 508.2 at 40.1 Milliseconds
Minimum Value: -5777.5 at 55.0 Milliseconds
SAE Filter Class: 600
Date of Test: 02/13/01
Curve Number: FIL-068

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-103

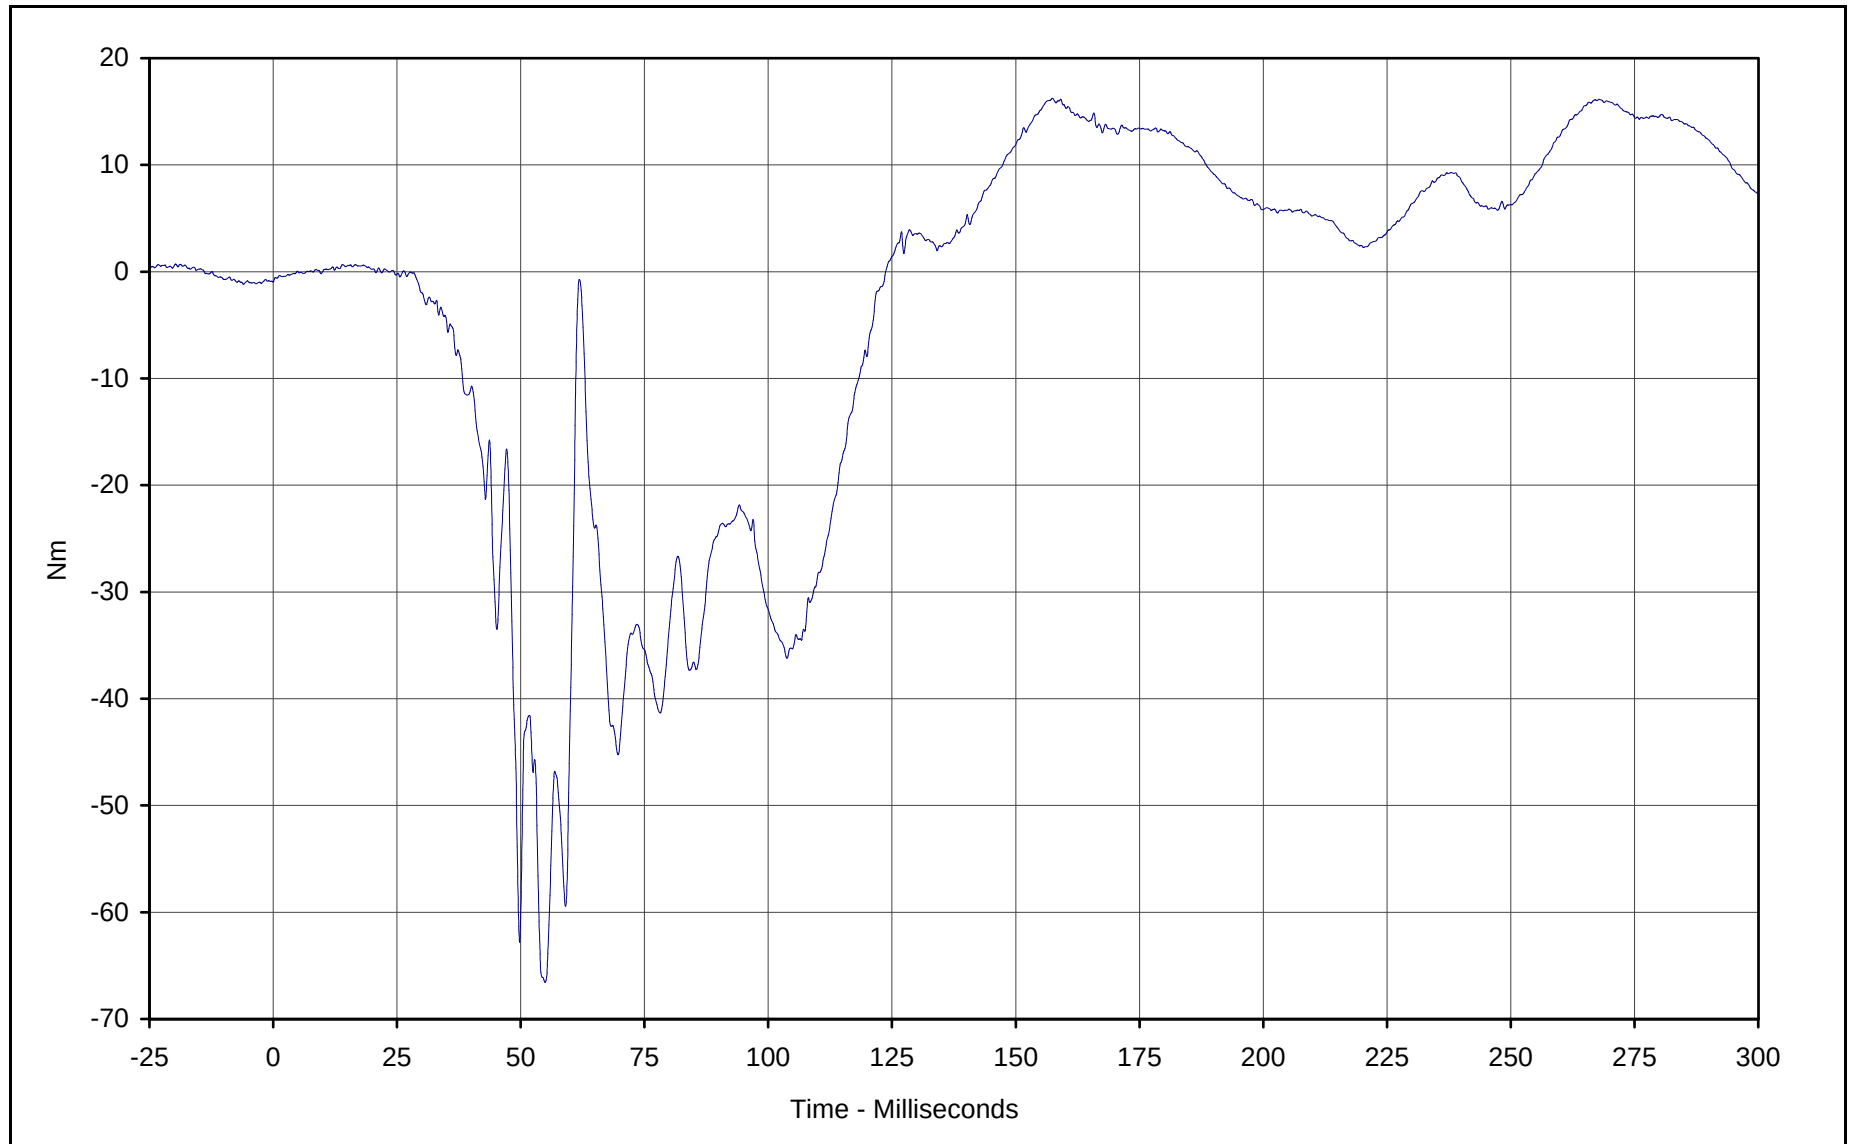

Curve Description: Passenger Left Upper Tibia Moment X

Maximum Value: 16.3 at 157.4 Milliseconds

Minimum Value: -66.6 at 54.9 Milliseconds

SAE Filter Class: 600

Date of Test: 02/13/01


Curve Number: FIL-069

Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

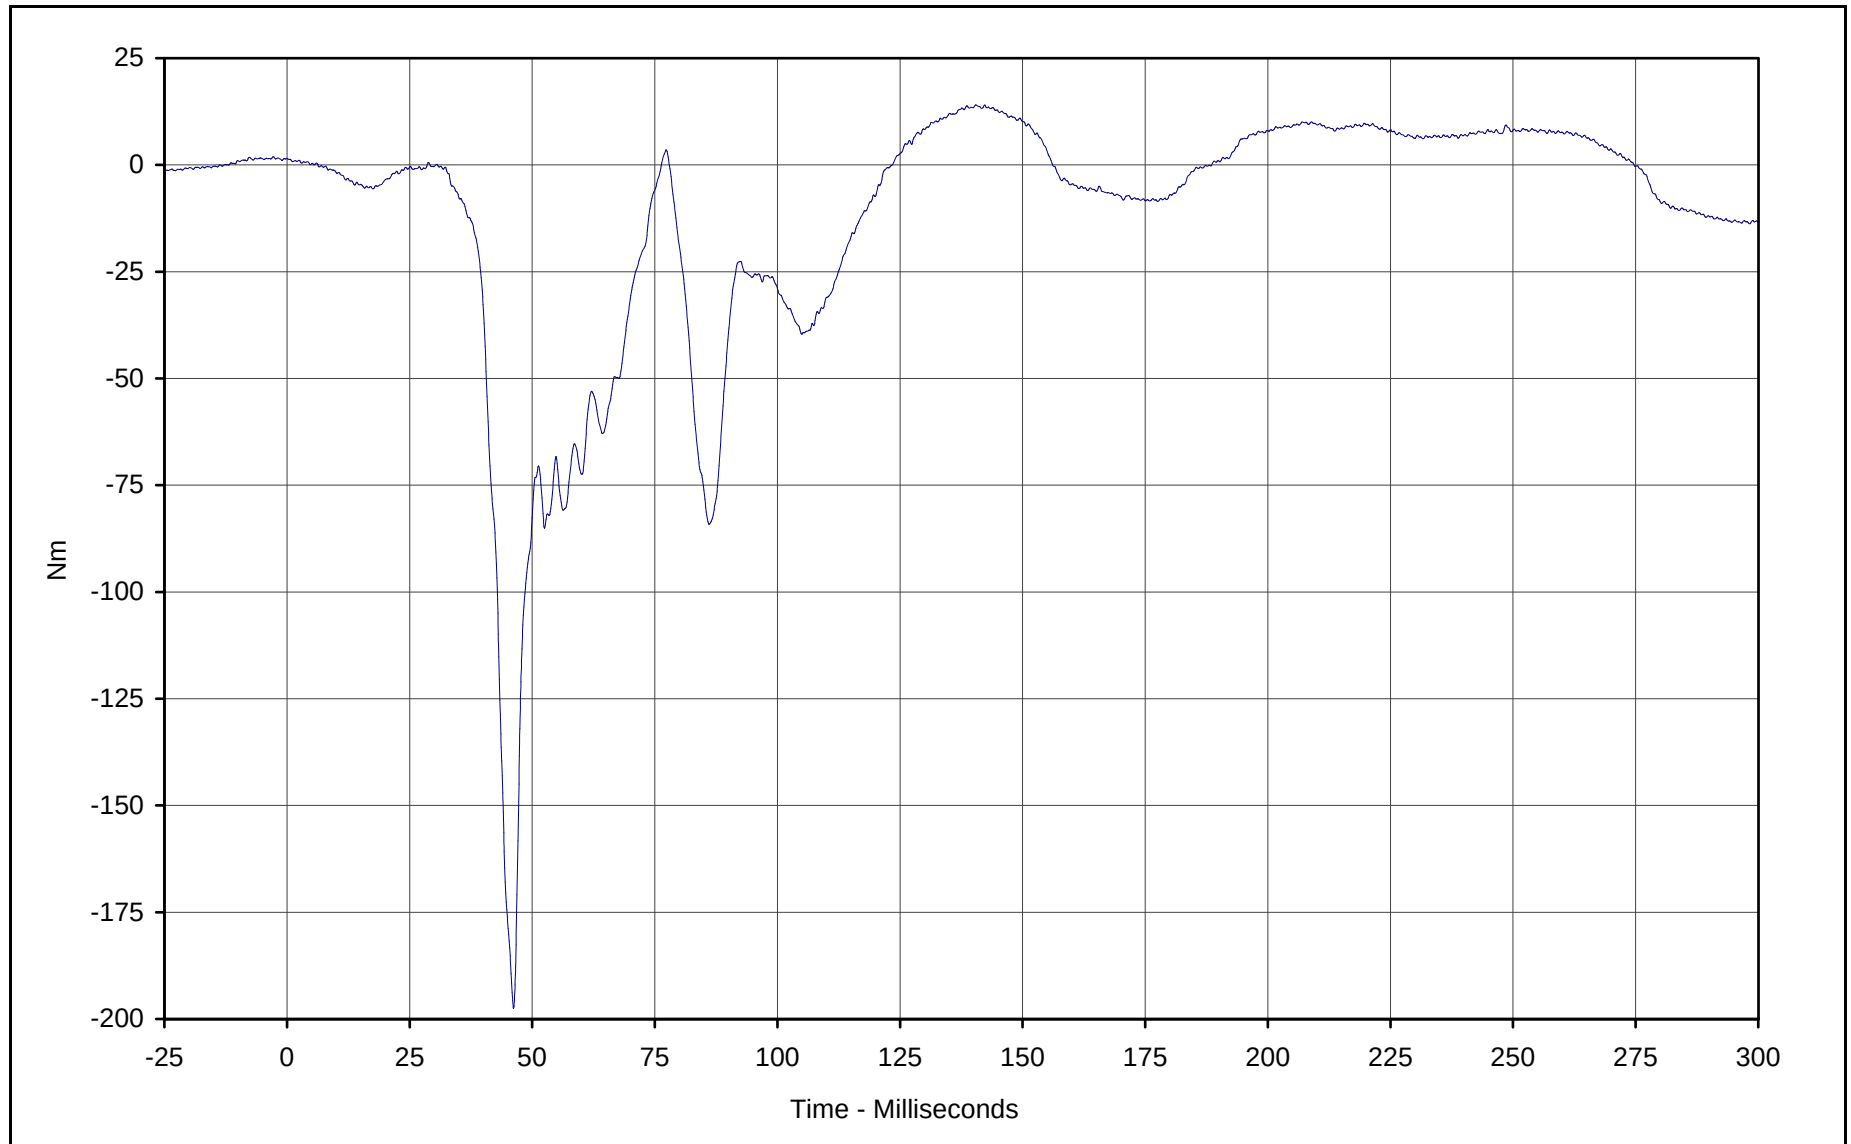

Curve Description: Passenger Left Upper Tibia Moment Y

Maximum Value: 14.1 at 140.5 Milliseconds

Minimum Value: -197.6 at 46.2 Milliseconds

SAE Filter Class: 600

Date of Test: 02/13/01


Curve Number: FIL-070

Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-105

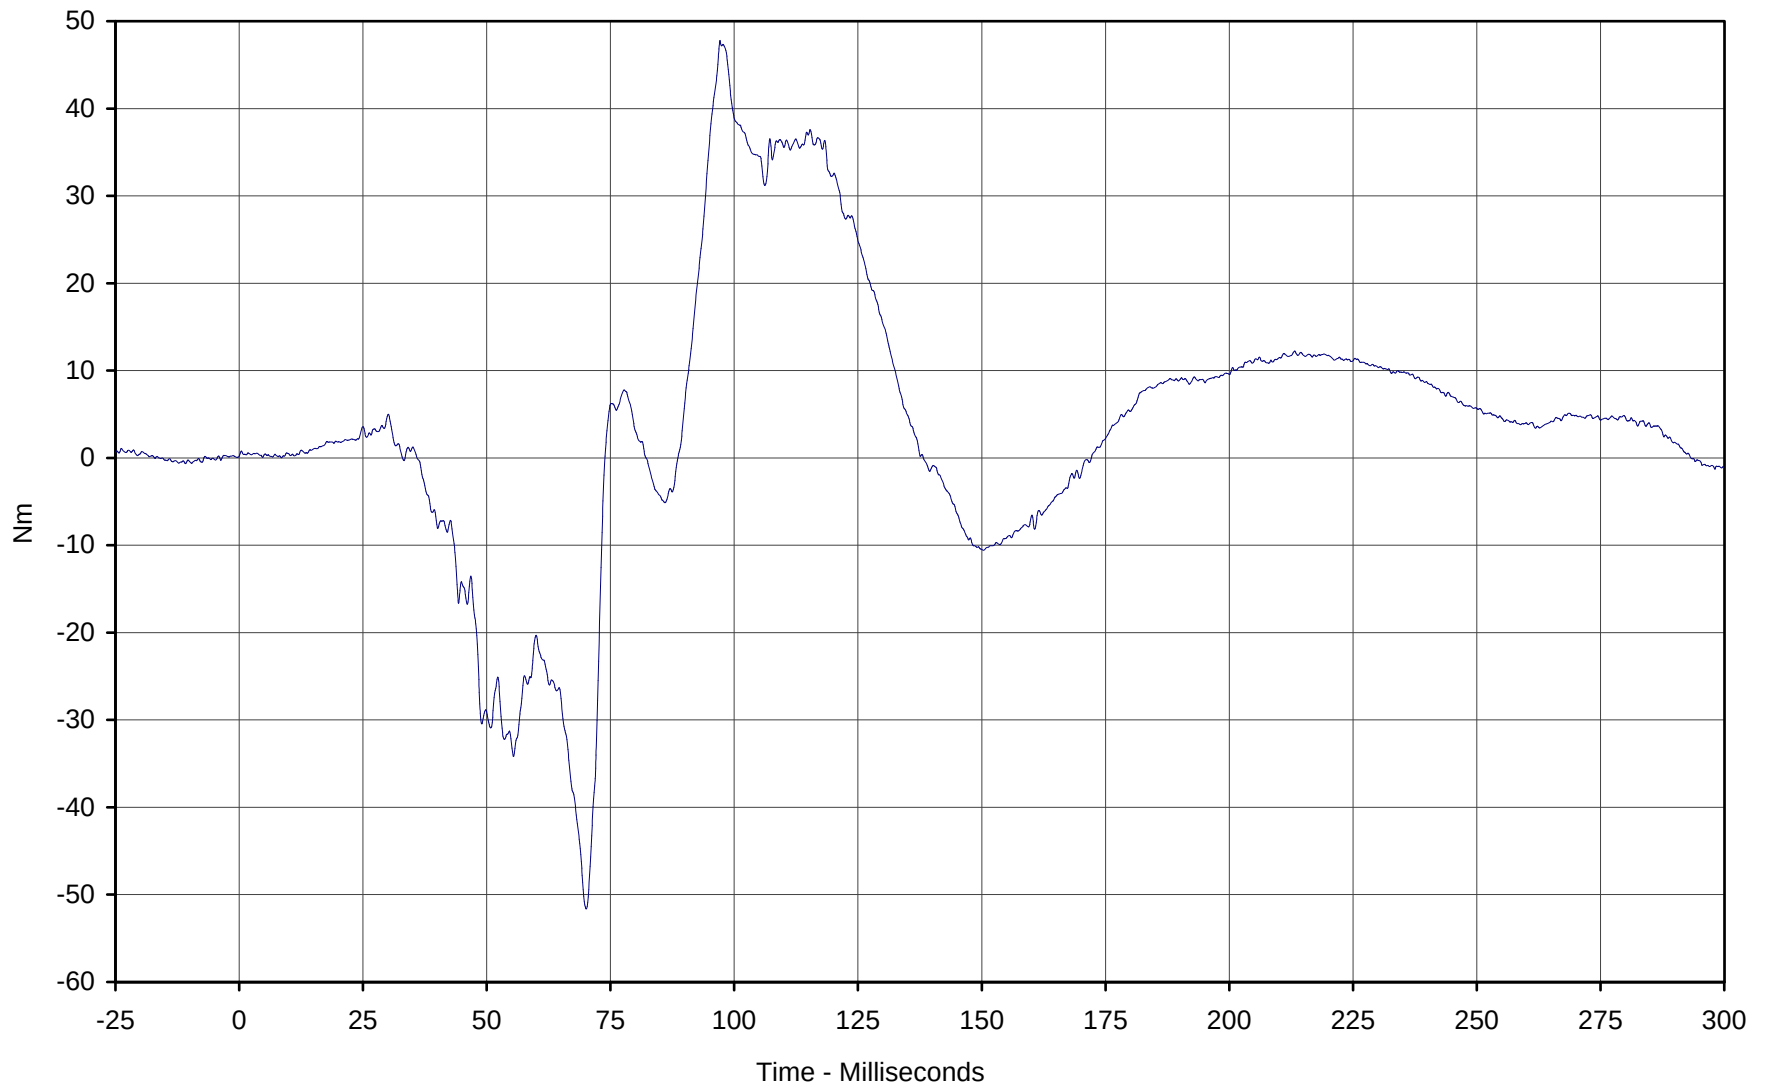

Curve Description: Passenger Right Upper Tibia Moment X

Maximum Value: 47.8 at 97.1 Milliseconds

Minimum Value: -51.6 at 70.1 Milliseconds

SAE Filter Class: 600

Date of Test: 02/13/01


Curve Number: FIL-071

Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

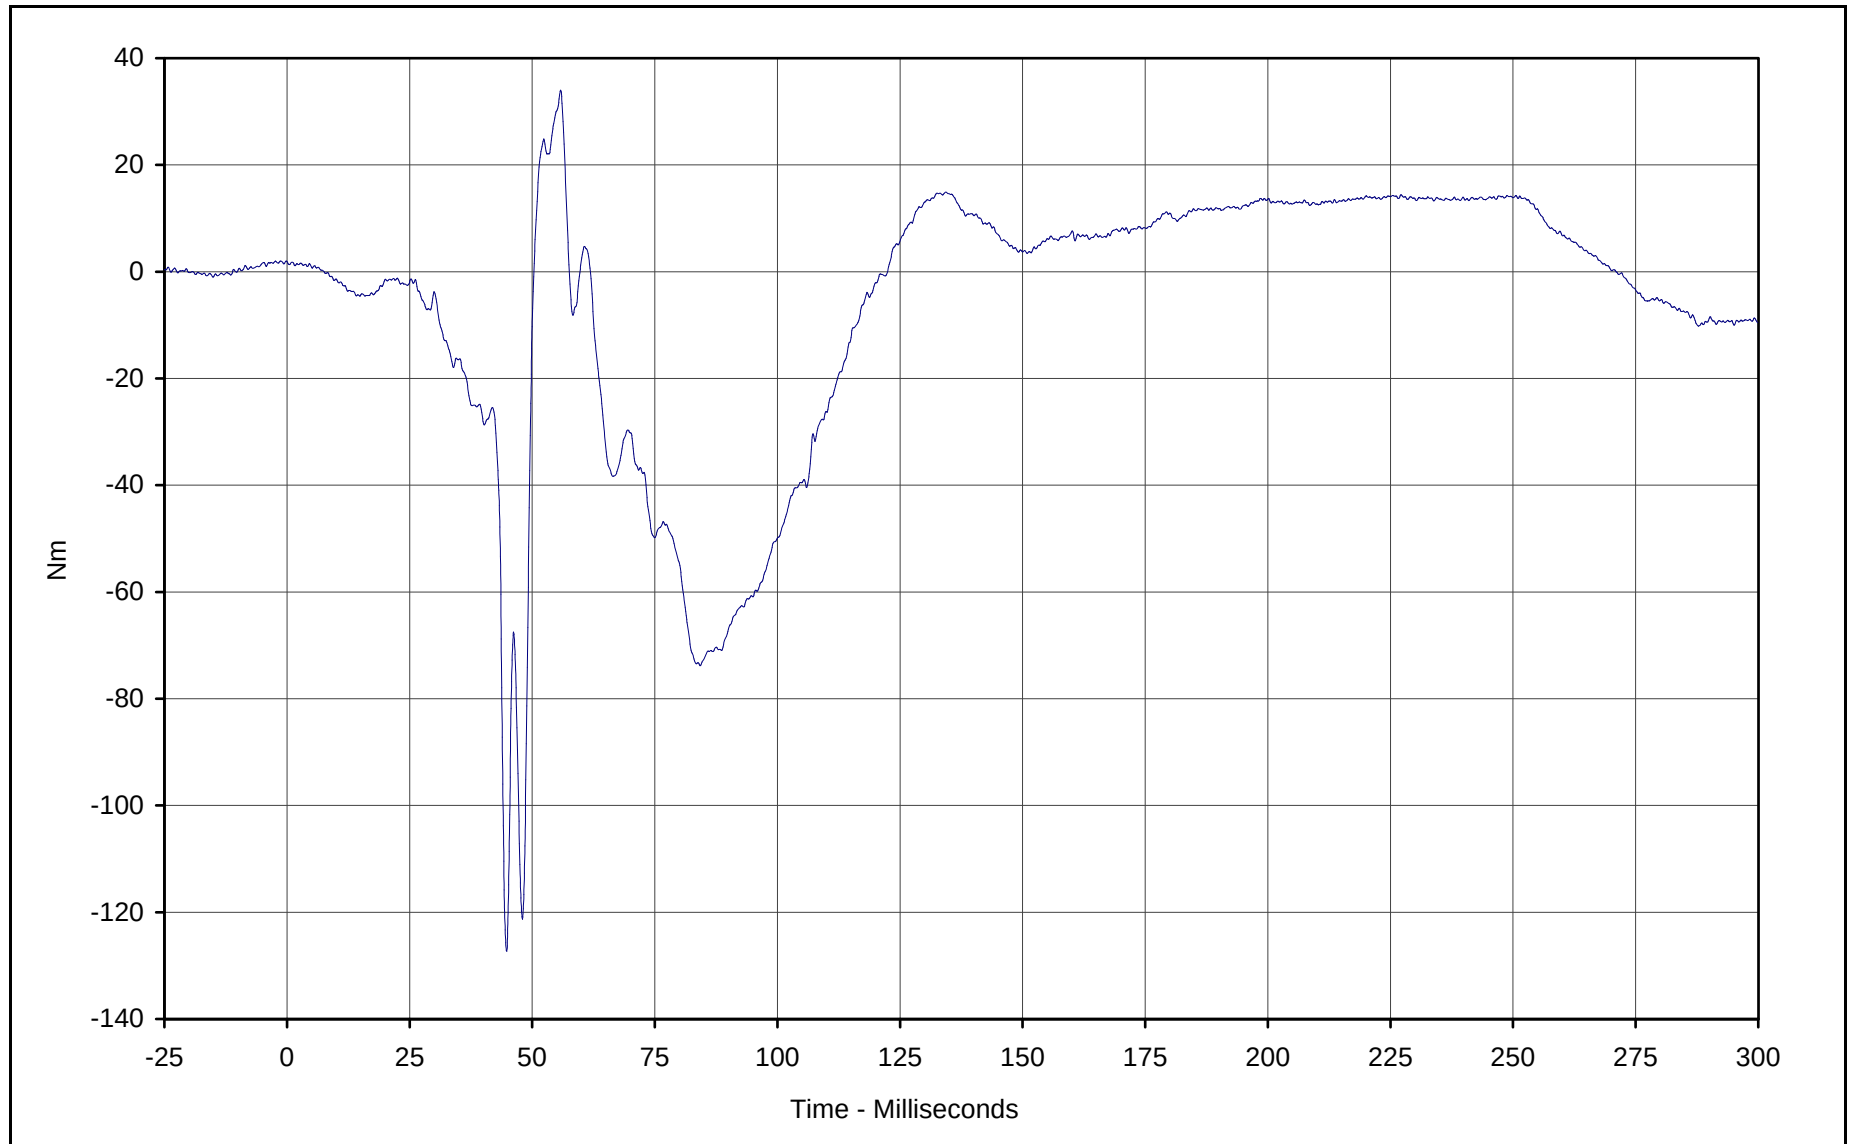

Curve Description: Passenger Right Upper Tibia Moment Y

Maximum Value: 34.0 at 55.8 Milliseconds

Minimum Value: -127.3 at 44.8 Milliseconds

SAE Filter Class: 600

Date of Test: 02/13/01


Curve Number: FIL-072

Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-107

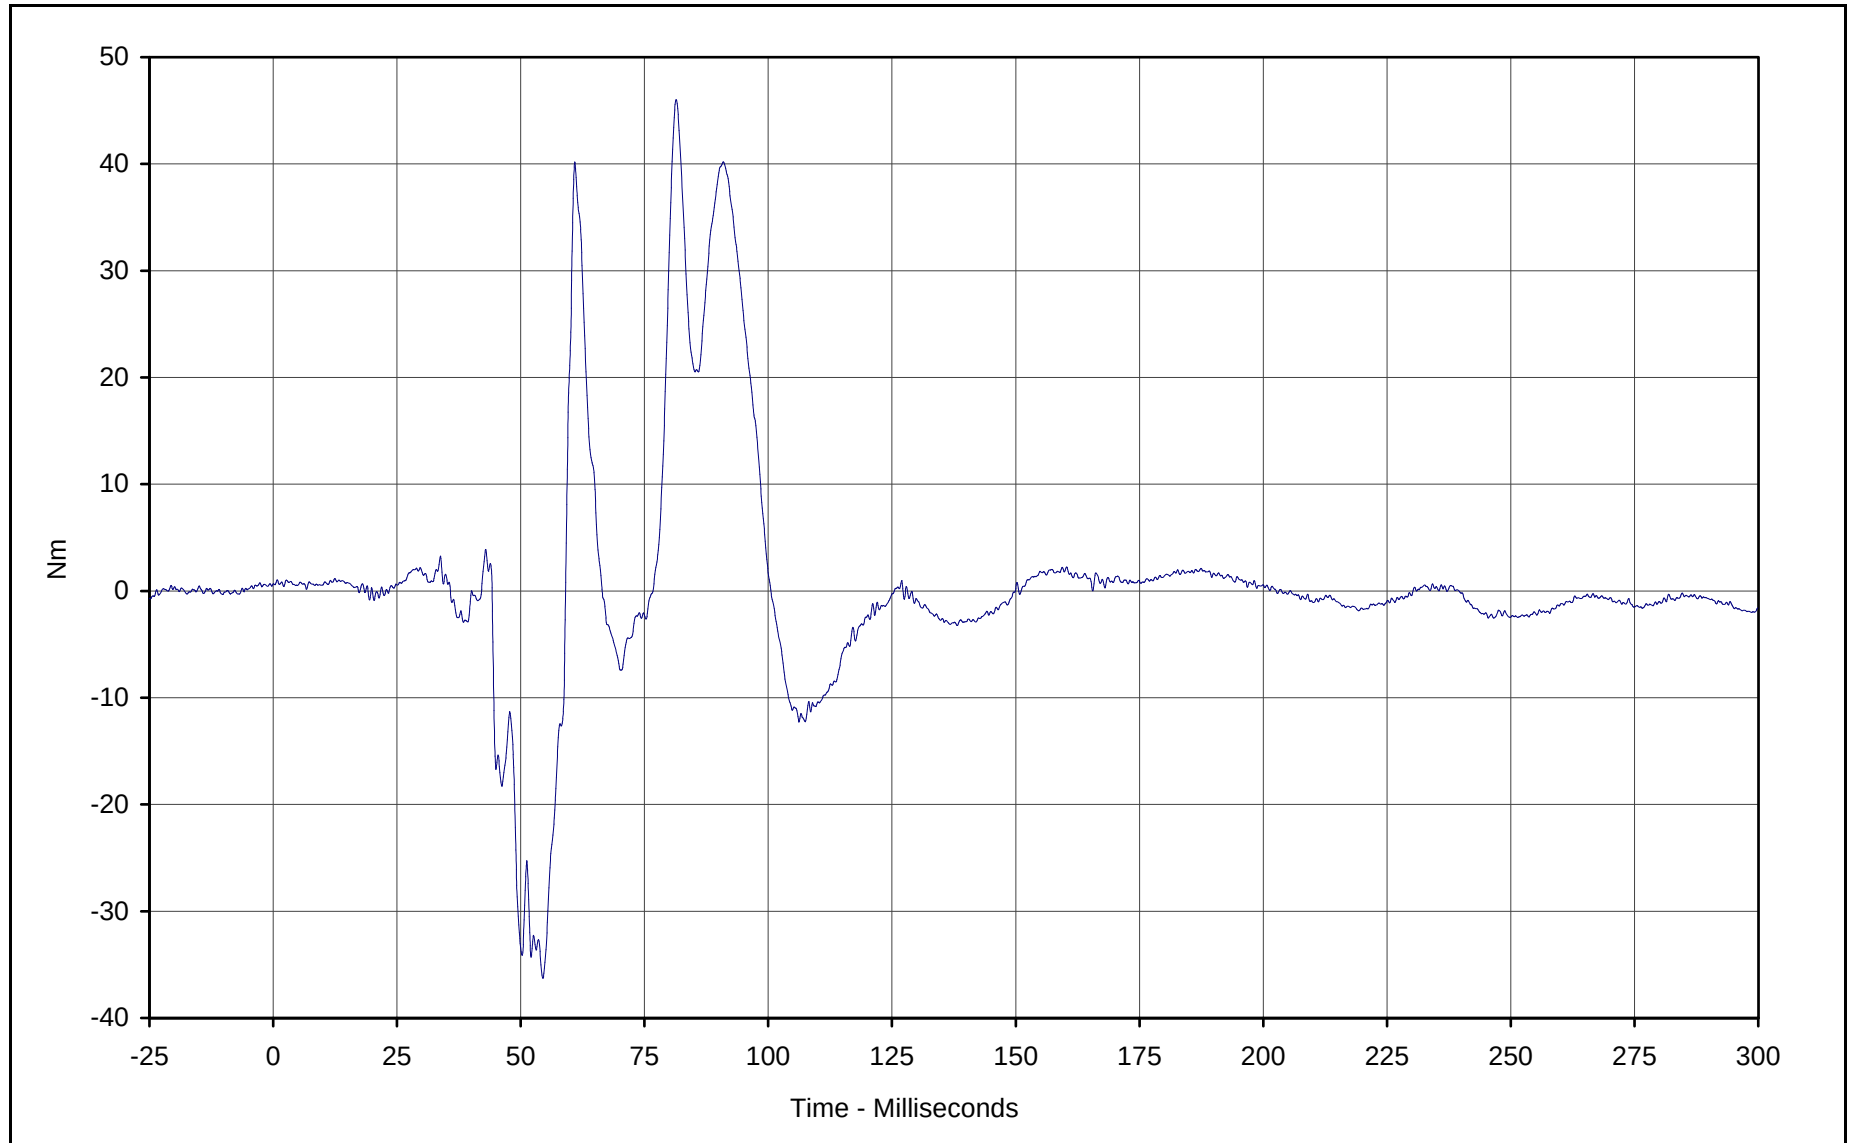

Curve Description: Passenger Left Lower Tibia Moment X

Maximum Value: 46.0 at 81.4 Milliseconds

Minimum Value: -36.3 at 54.5 Milliseconds

SAE Filter Class: 600

Date of Test: 02/13/01

Curve Number: FIL-073


Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-108

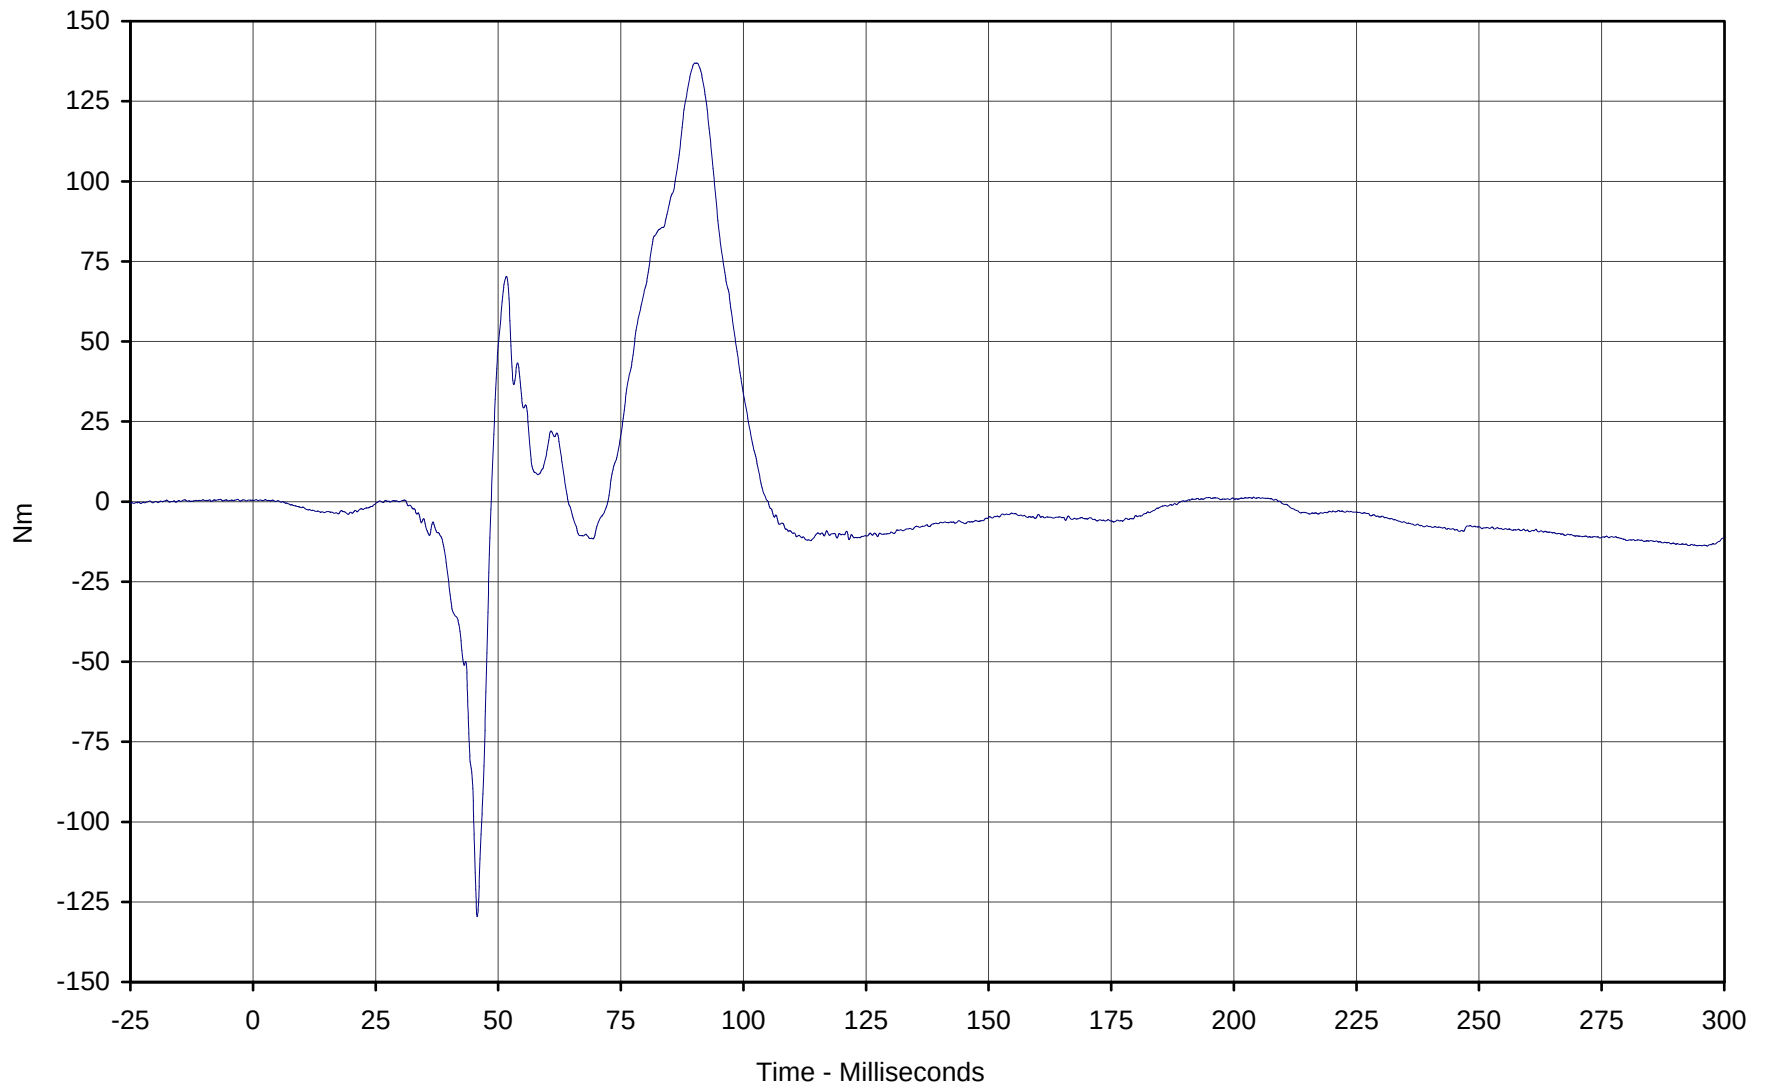

Curve Description: Passenger Left Lower Tibia Moment Y

Maximum Value: 136.9 at 90.5 Milliseconds

Minimum Value: -129.6 at 45.7 Milliseconds

SAE Filter Class: 600

Date of Test: 02/13/01


Curve Number: FIL-074

Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

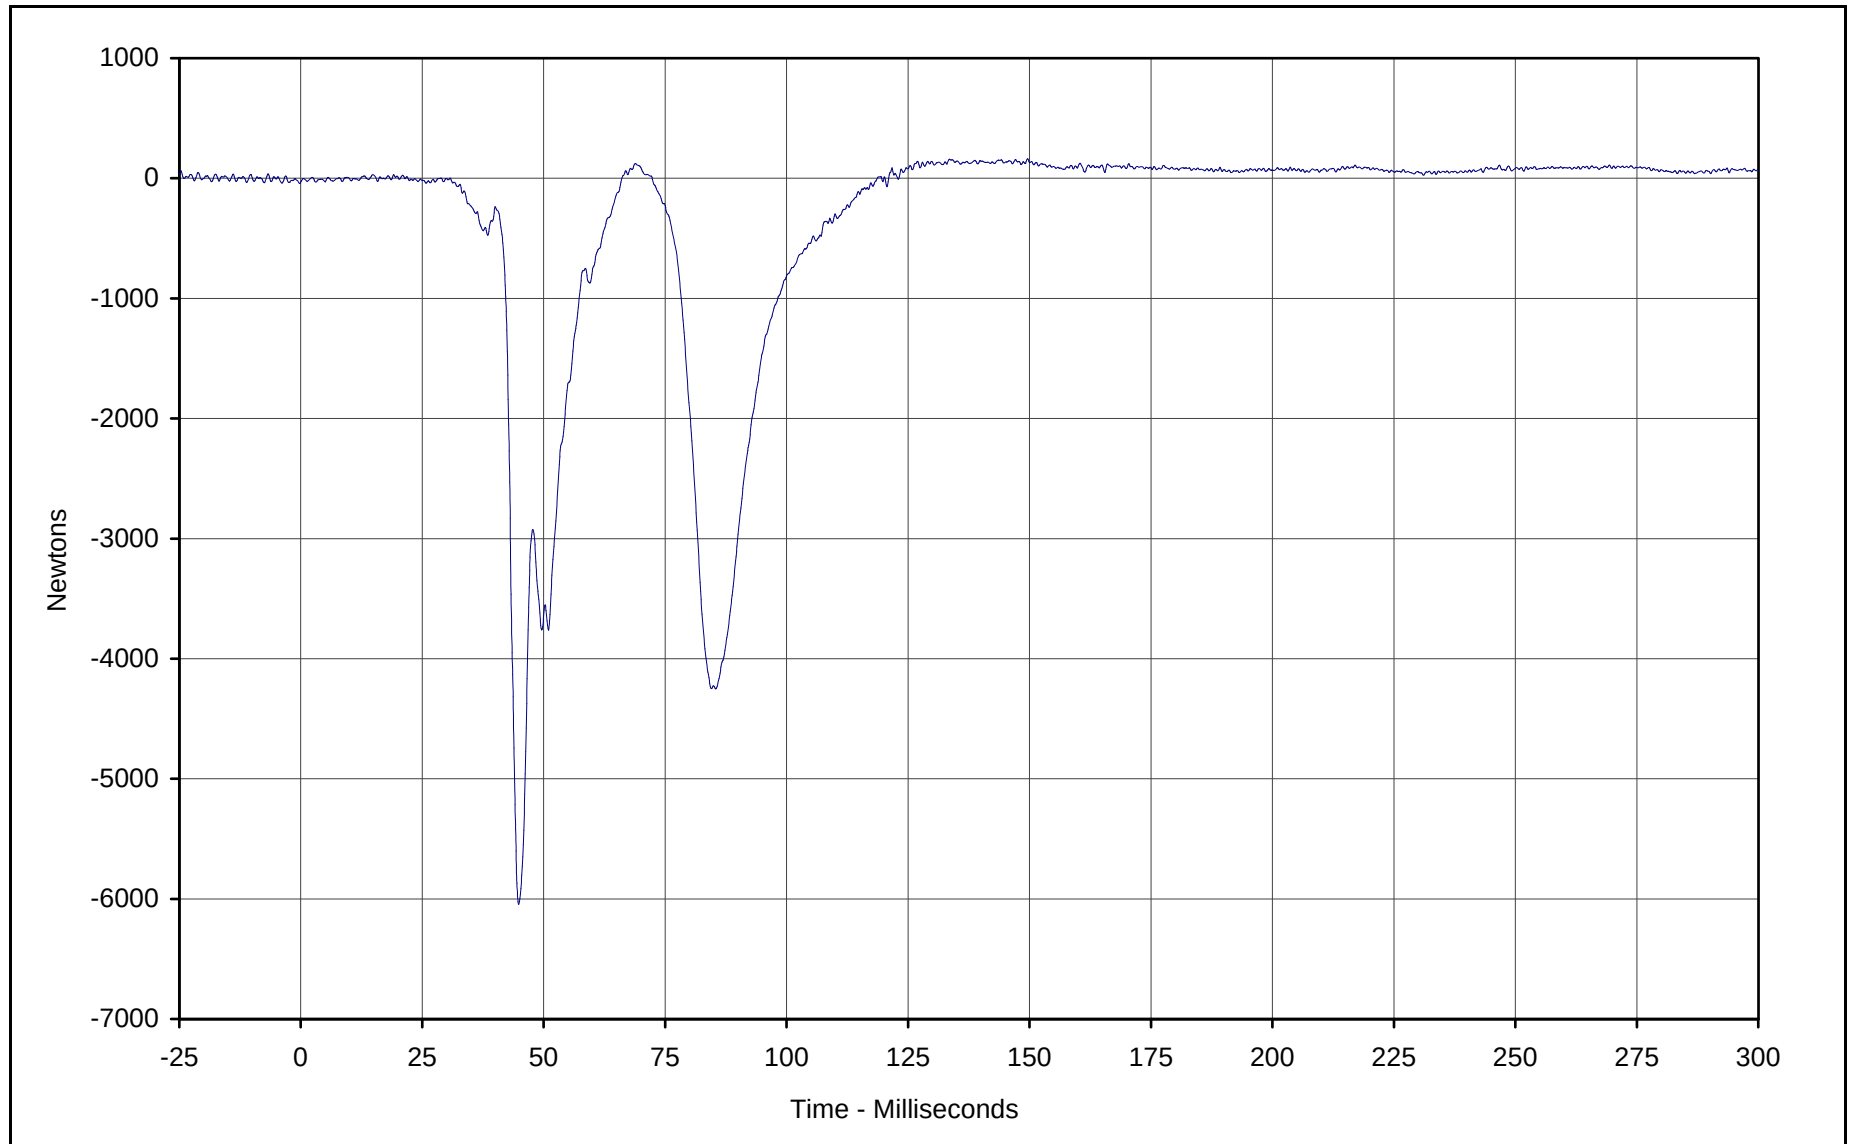

Curve Description: Passenger Left Lower Tibia Force Z

Maximum Value: 161.8 at 149.6 Milliseconds

Minimum Value: -6044.1 at 44.8 Milliseconds

SAE Filter Class: 600

Date of Test: 02/13/01


Curve Number: FIL-075

Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



B-110

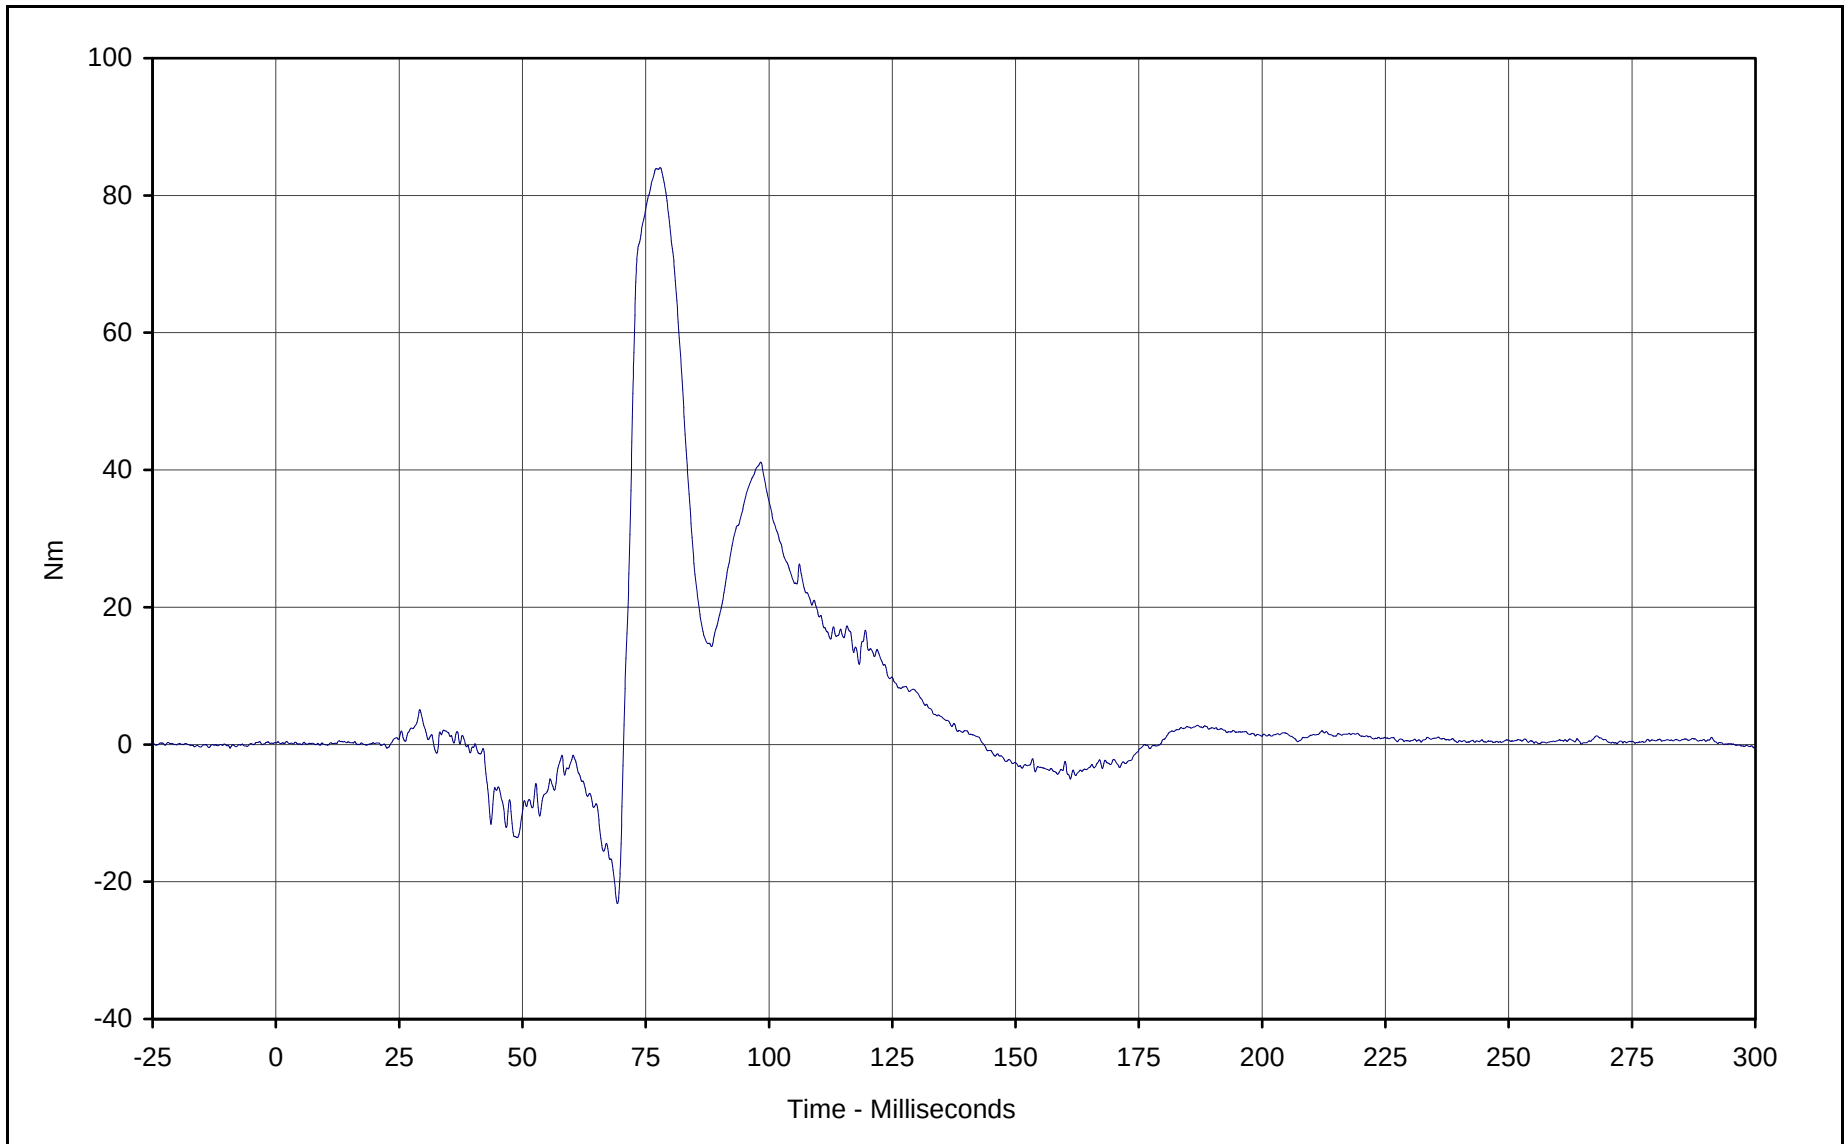

Curve Description: Passenger Right Lower Tibia Moment X

Maximum Value: 84.0 at 77.9 Milliseconds

Minimum Value: -23.2 at 69.3 Milliseconds

SAE Filter Class: 600

Date of Test: 02/13/01

Curve Number: FIL-076


Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-111

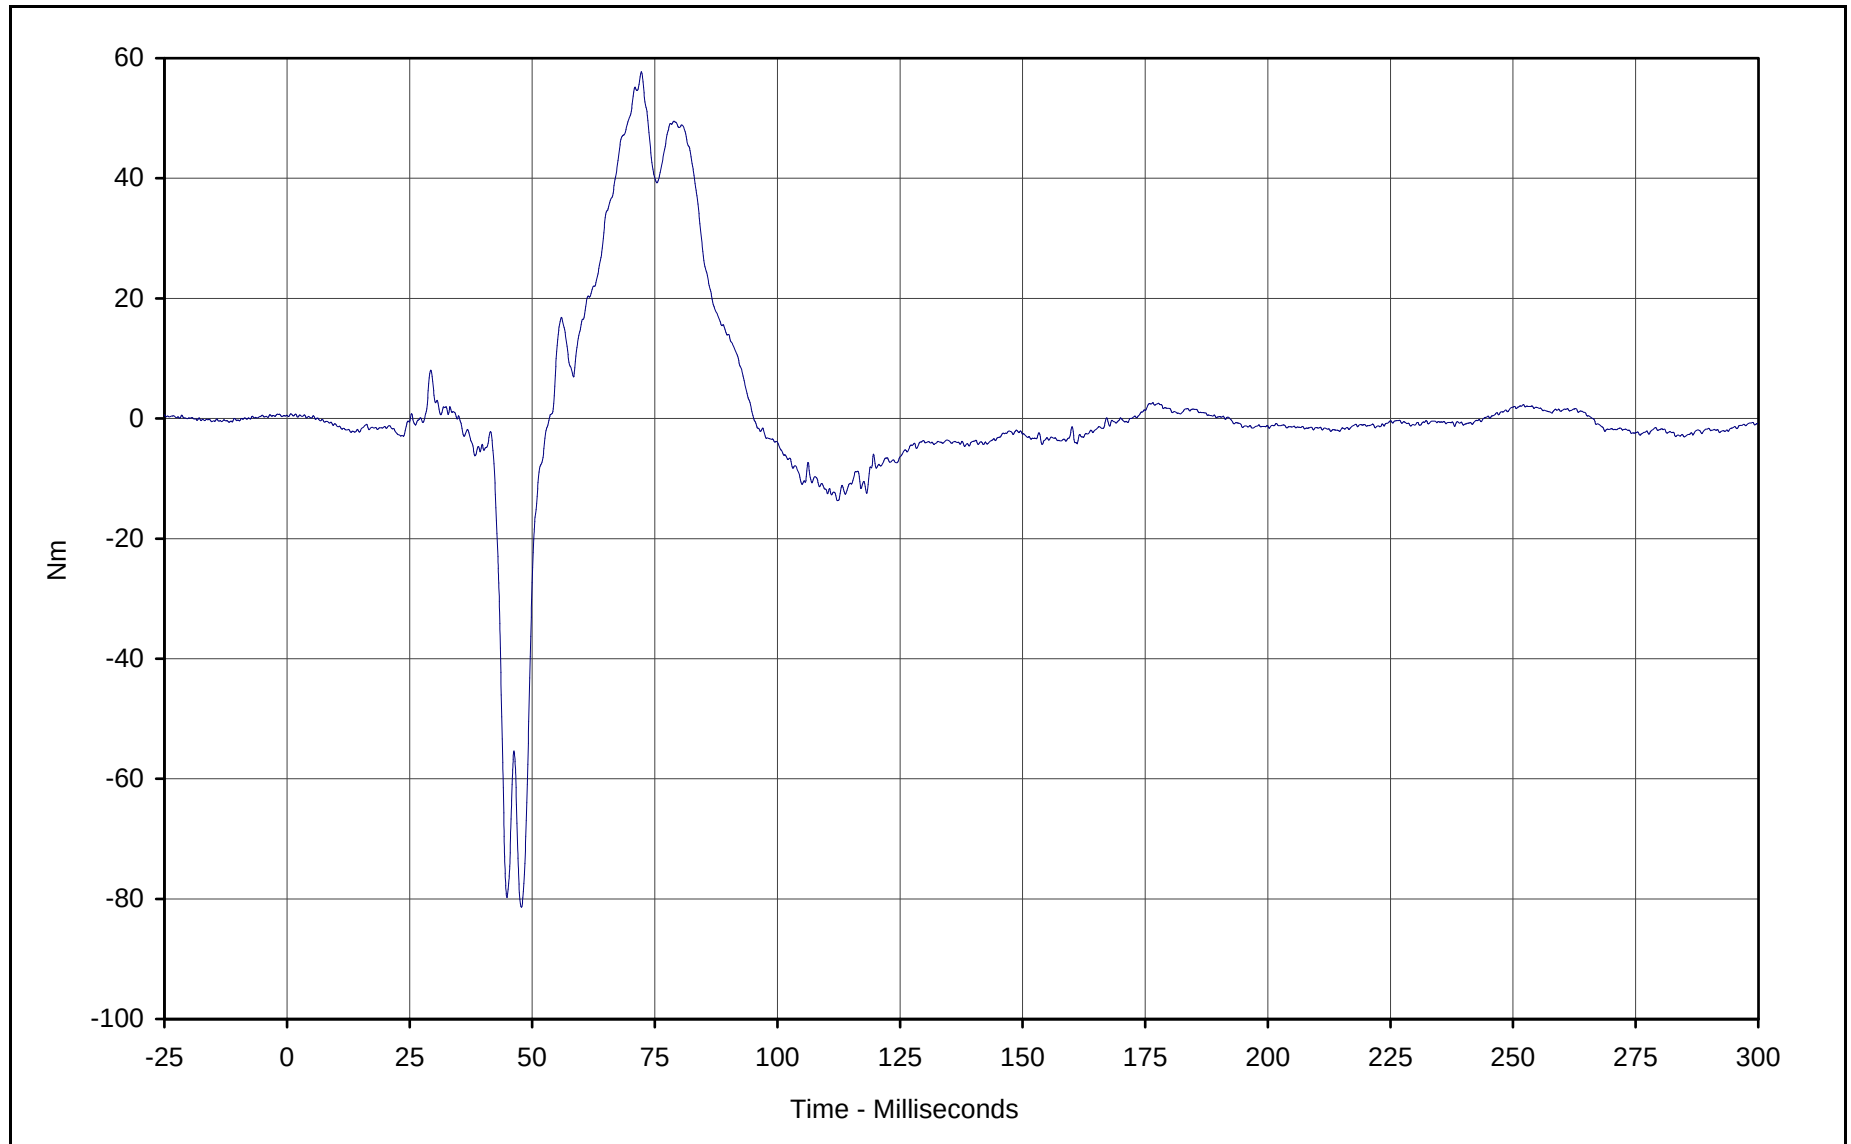

Curve Description: Passenger Right Lower Tibia Moment Y

Maximum Value: 57.7 at 72.3 Milliseconds

Minimum Value: -81.4 at 47.8 Milliseconds

SAE Filter Class: 600

Date of Test: 02/13/01

Curve Number: FIL-077


Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-112

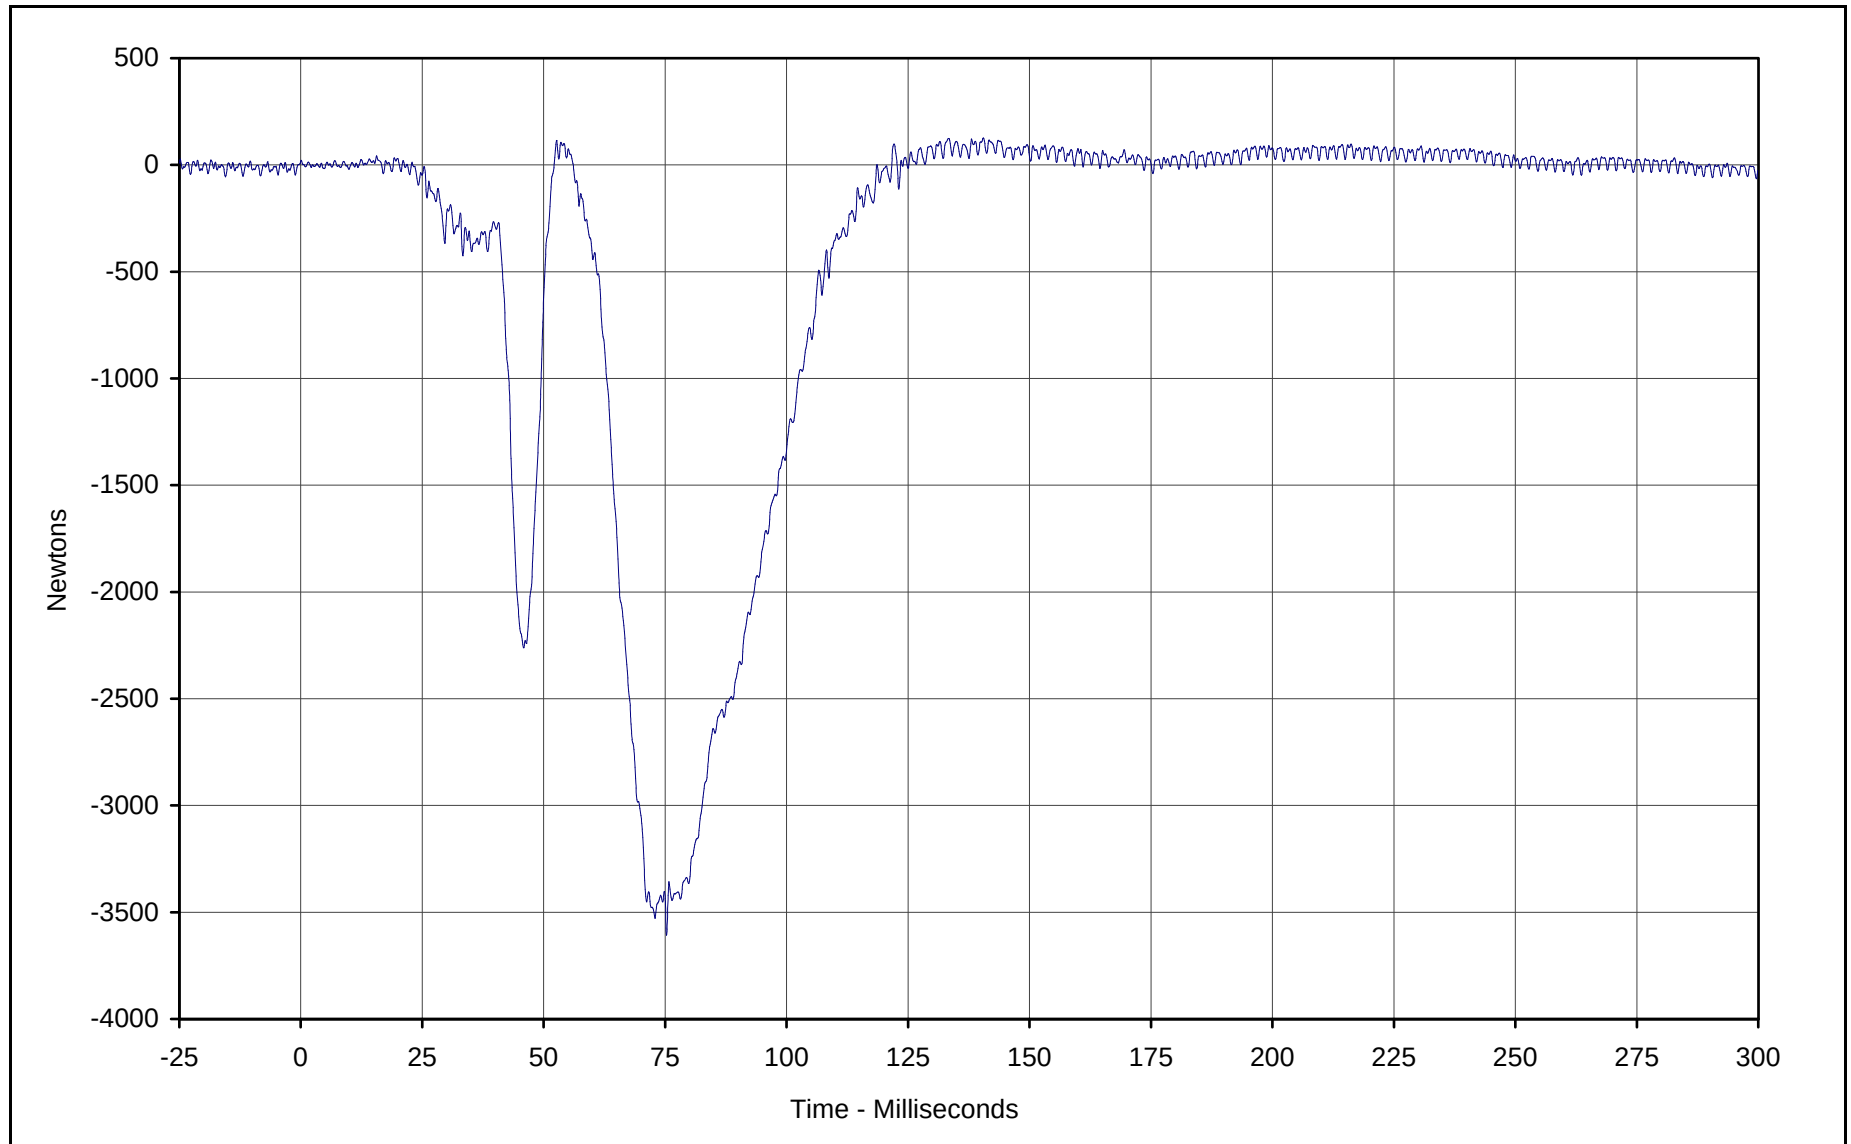

Curve Description: Passenger Right lower Tibia Force Z

Maximum Value: 126.2 at 140.5 Milliseconds

Minimum Value: -3608.4 at 75.3 Milliseconds

SAE Filter Class: 600

Date of Test: 02/13/01

Curve Number: FIL-078


Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-113

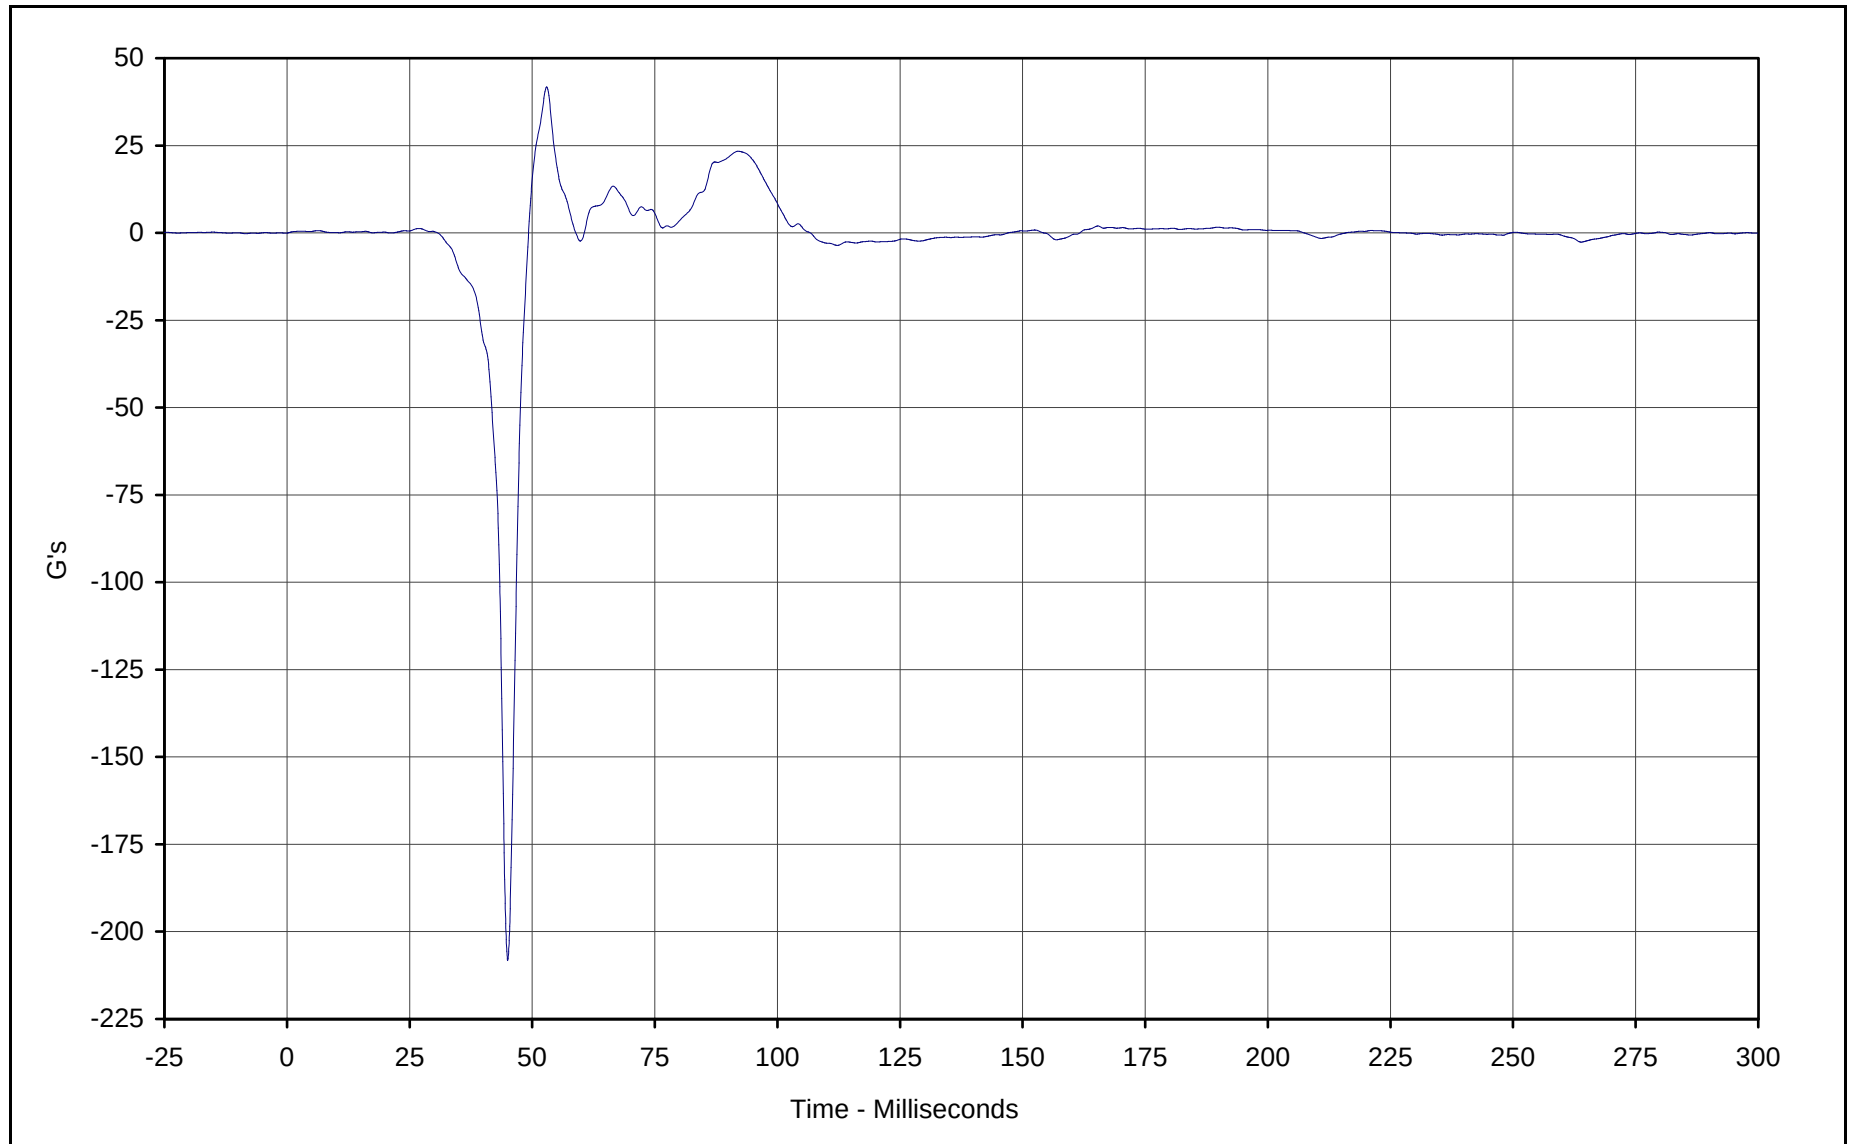


Curve Description: Passenger Left Foot Aft X
Maximum Value: 41.8 at 53.0 Milliseconds
Minimum Value: -208.3 at 45.0 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: FIL-079

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-114

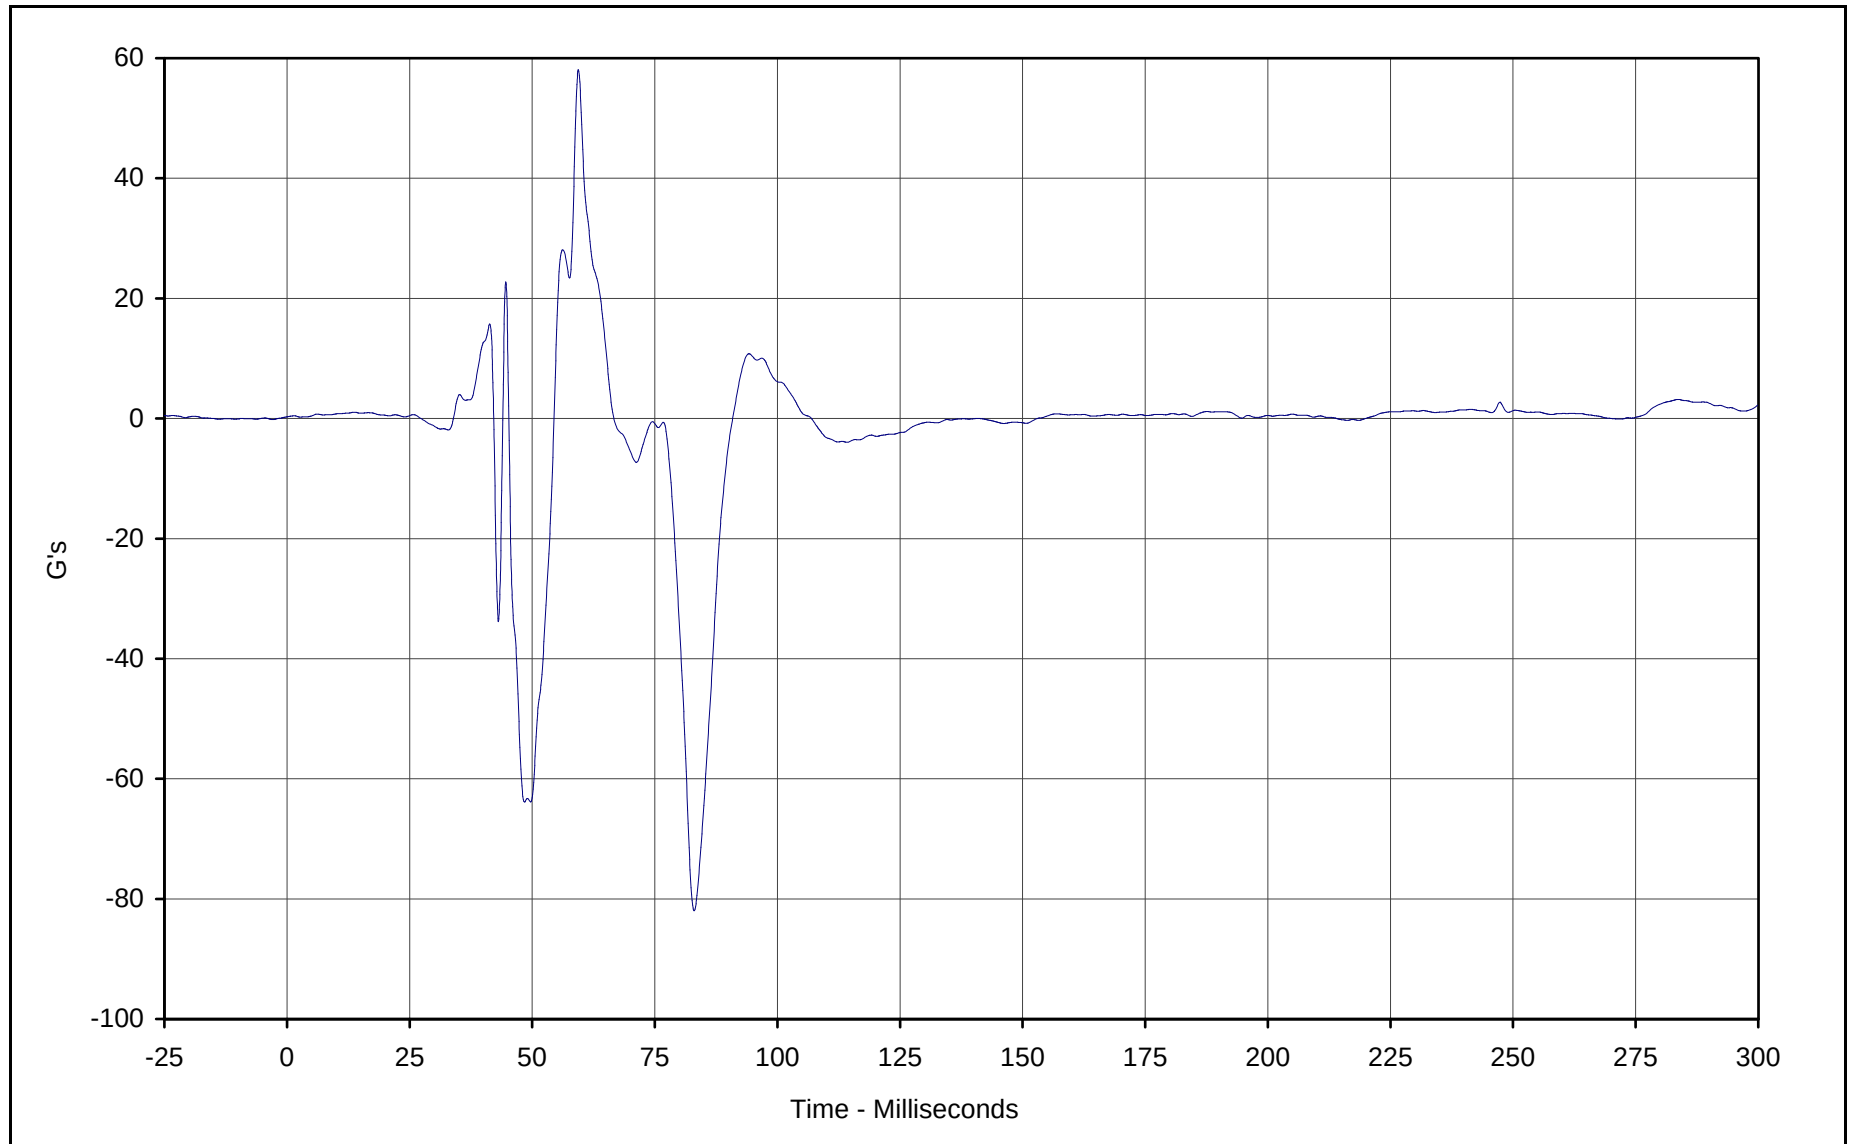


Curve Description: Passenger Left Foot Aft Z
Maximum Value: 58.1 at 59.4 Milliseconds
Minimum Value: -82.0 at 83.0 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: FIL-080

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-115

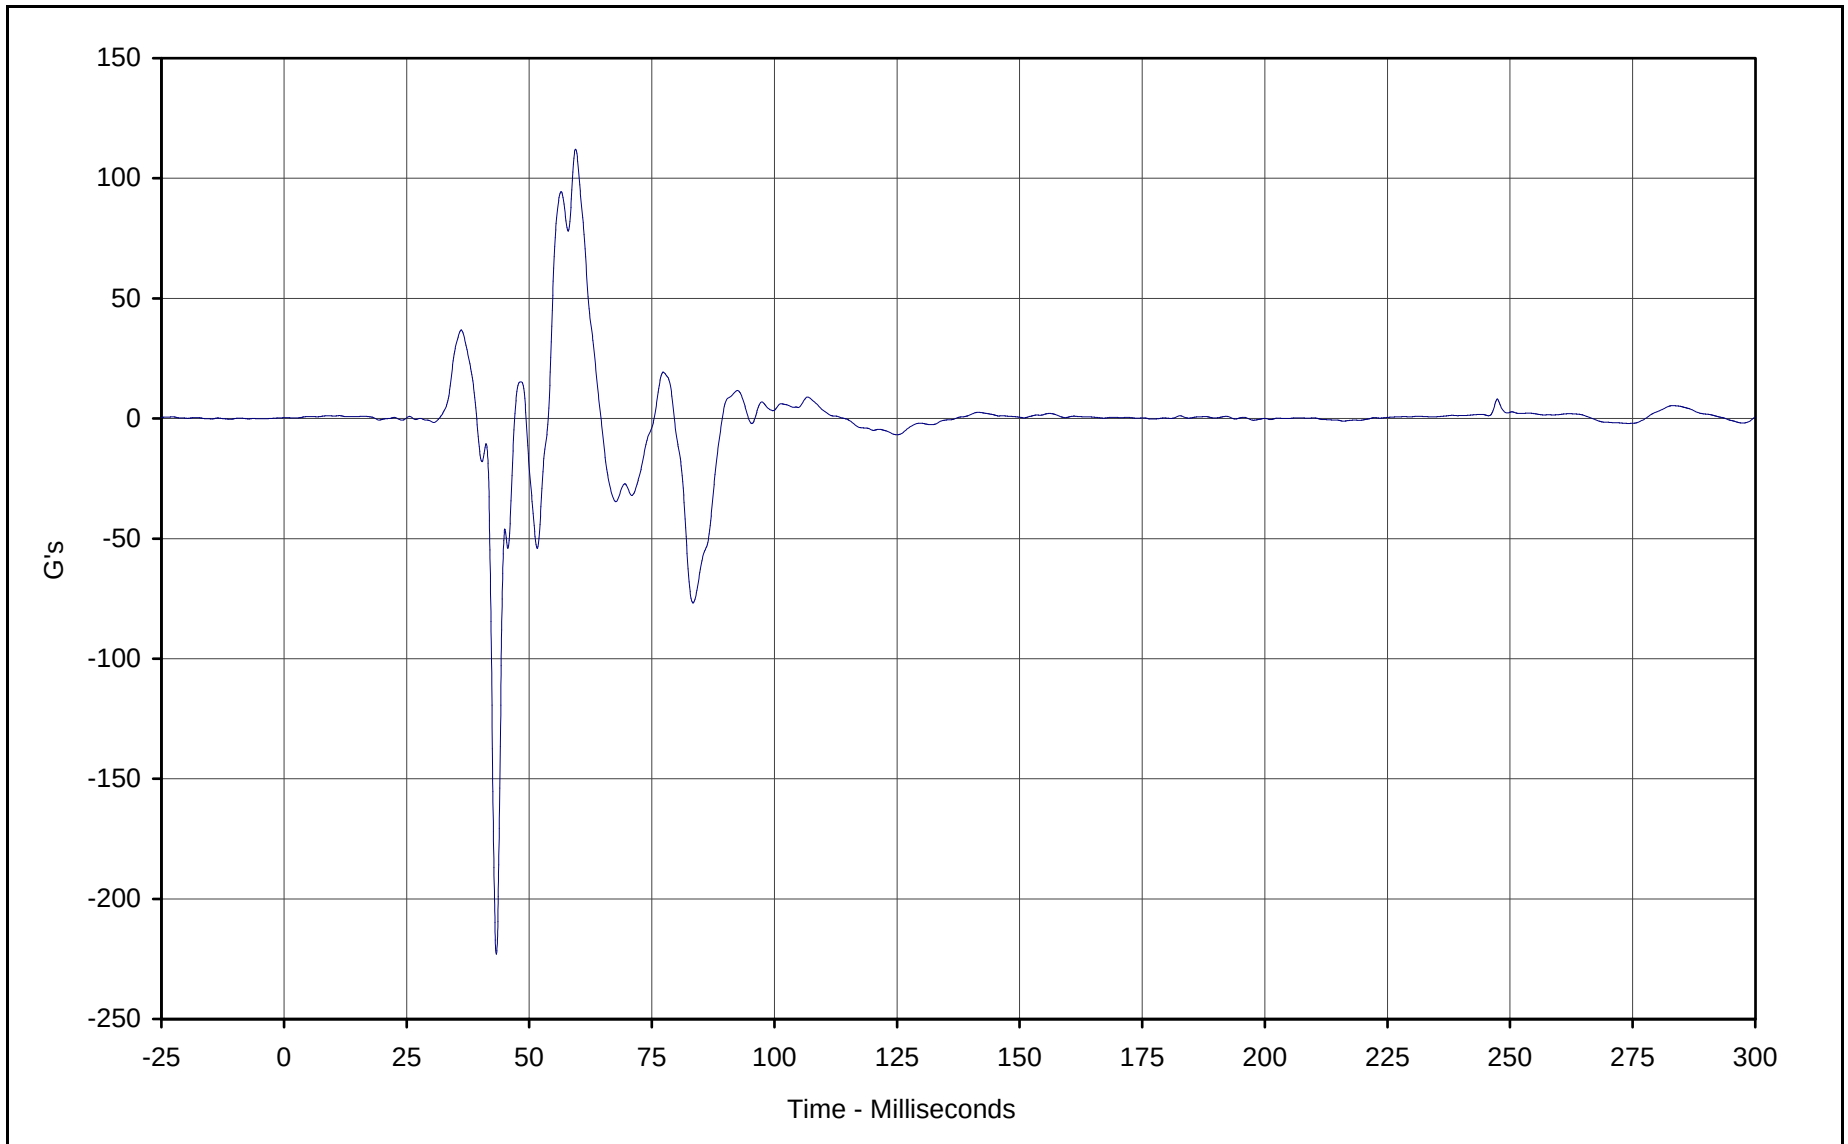


Curve Description: Passenger Left Foot Fore Z
Maximum Value: 112.0 at 59.5 Milliseconds
Minimum Value: -223.0 at 43.3 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: FIL-081

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-116

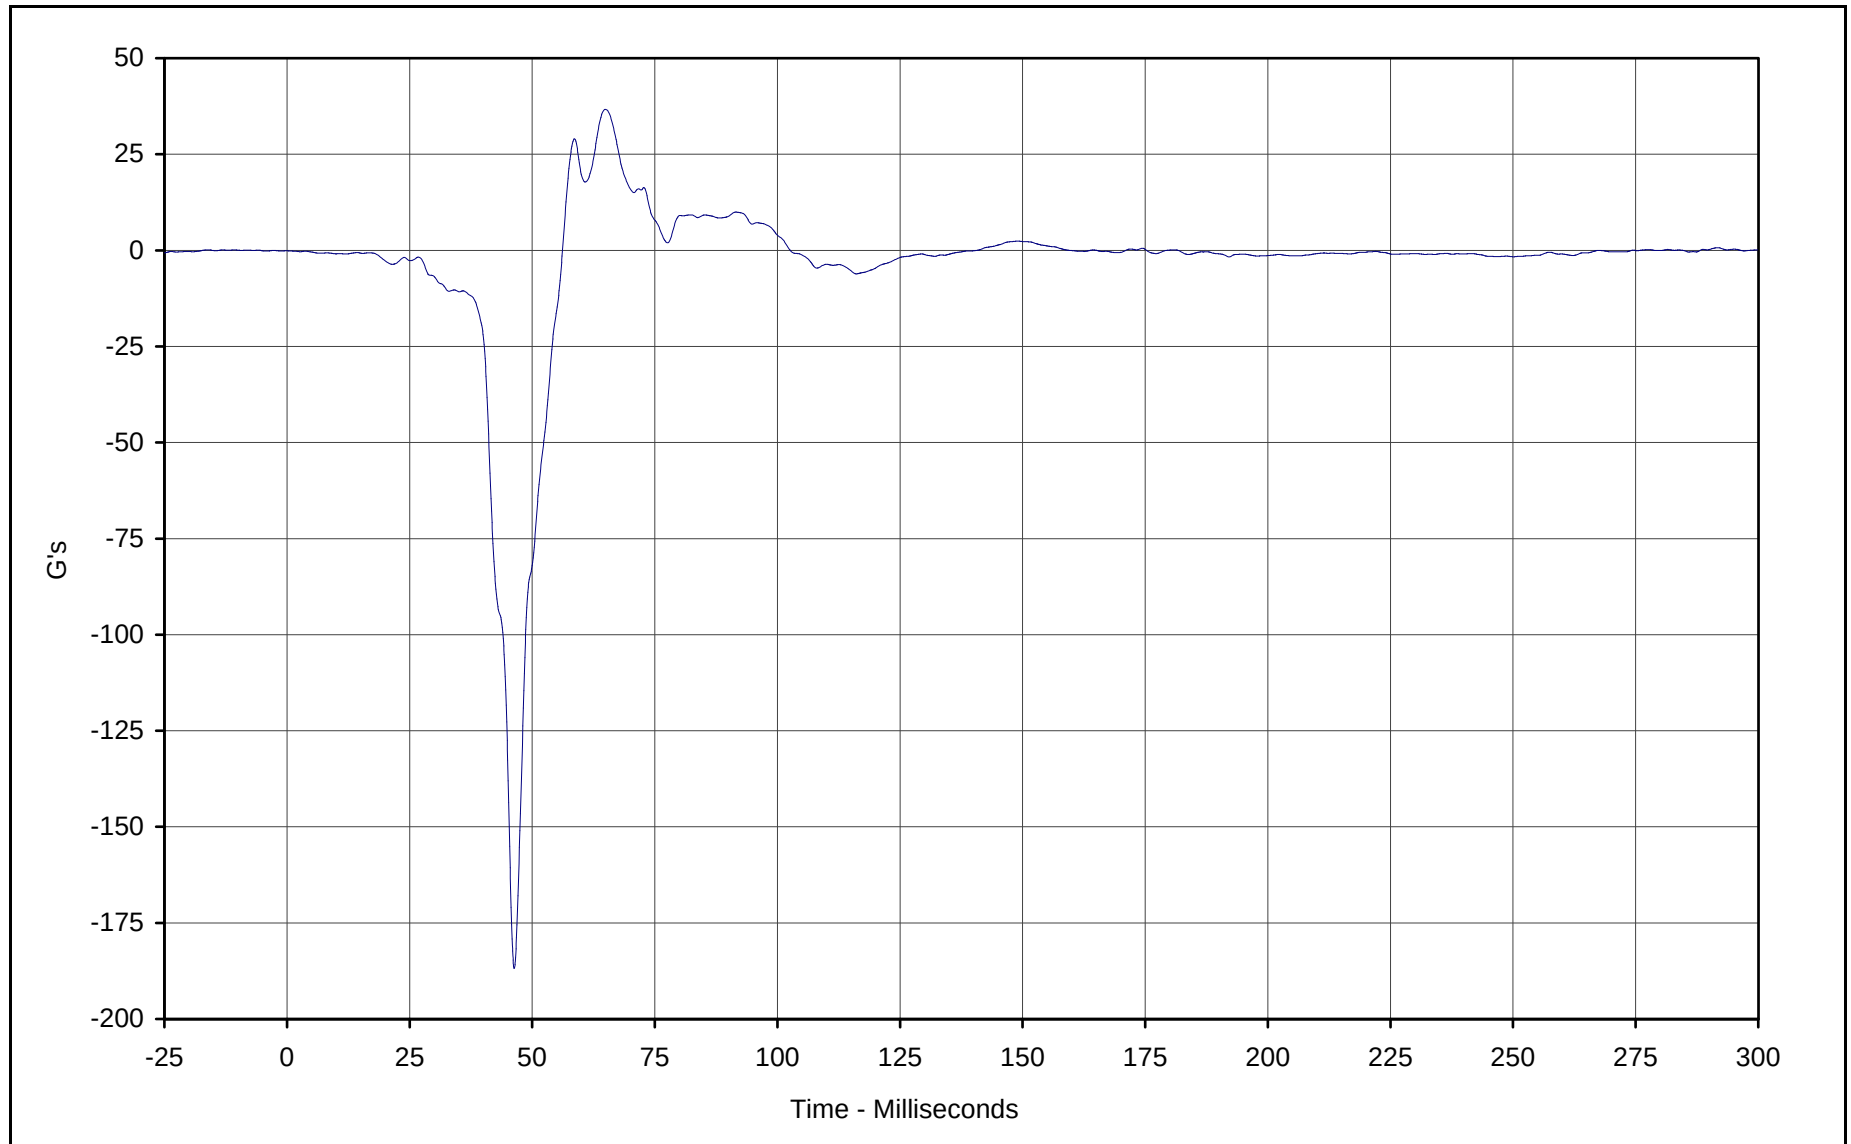


Curve Description: Passenger Right Foot Aft X
Maximum Value: 36.7 at 64.9 Milliseconds
Minimum Value: -186.8 at 46.3 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: FIL-082

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-117

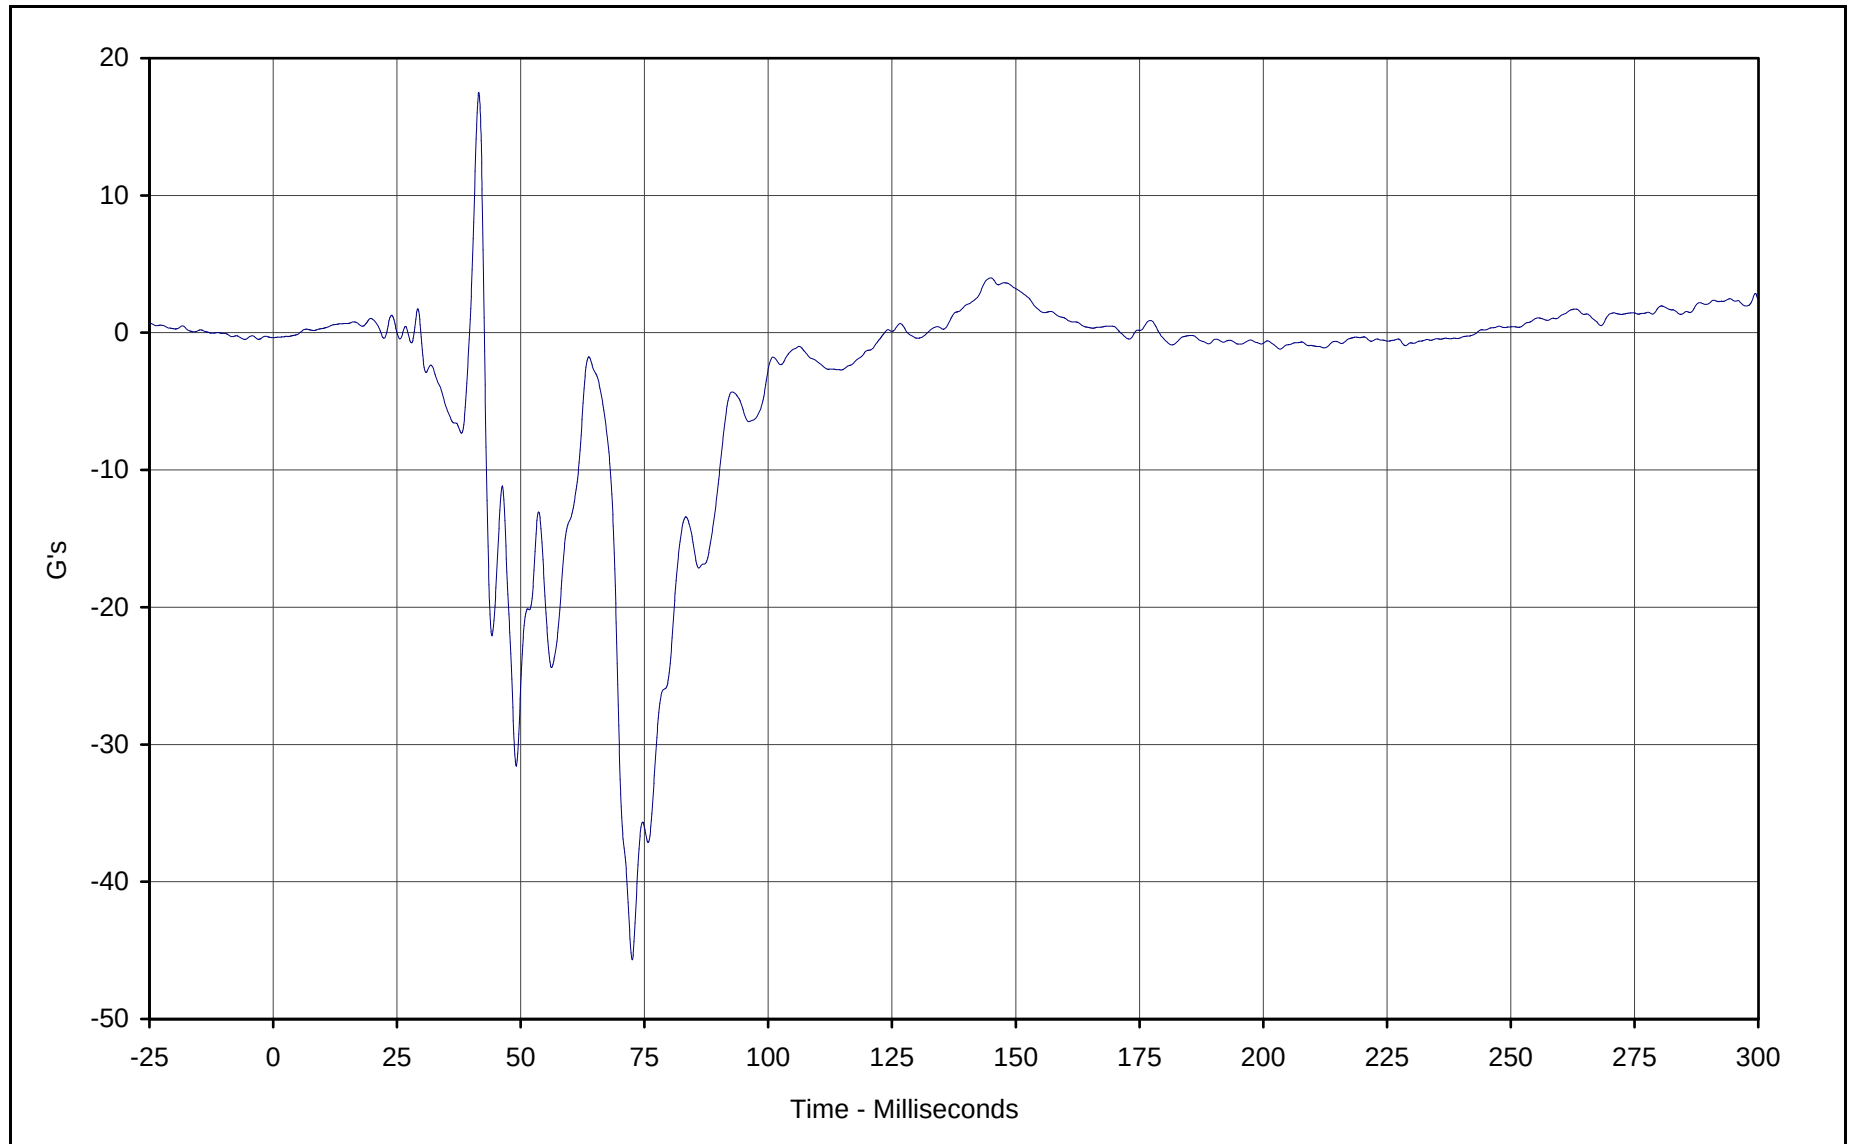


Curve Description: Passenger Right Foot Aft Z
Maximum Value: 17.5 at 41.5 Milliseconds
Minimum Value: -45.7 at 72.5 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: FIL-083

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-118

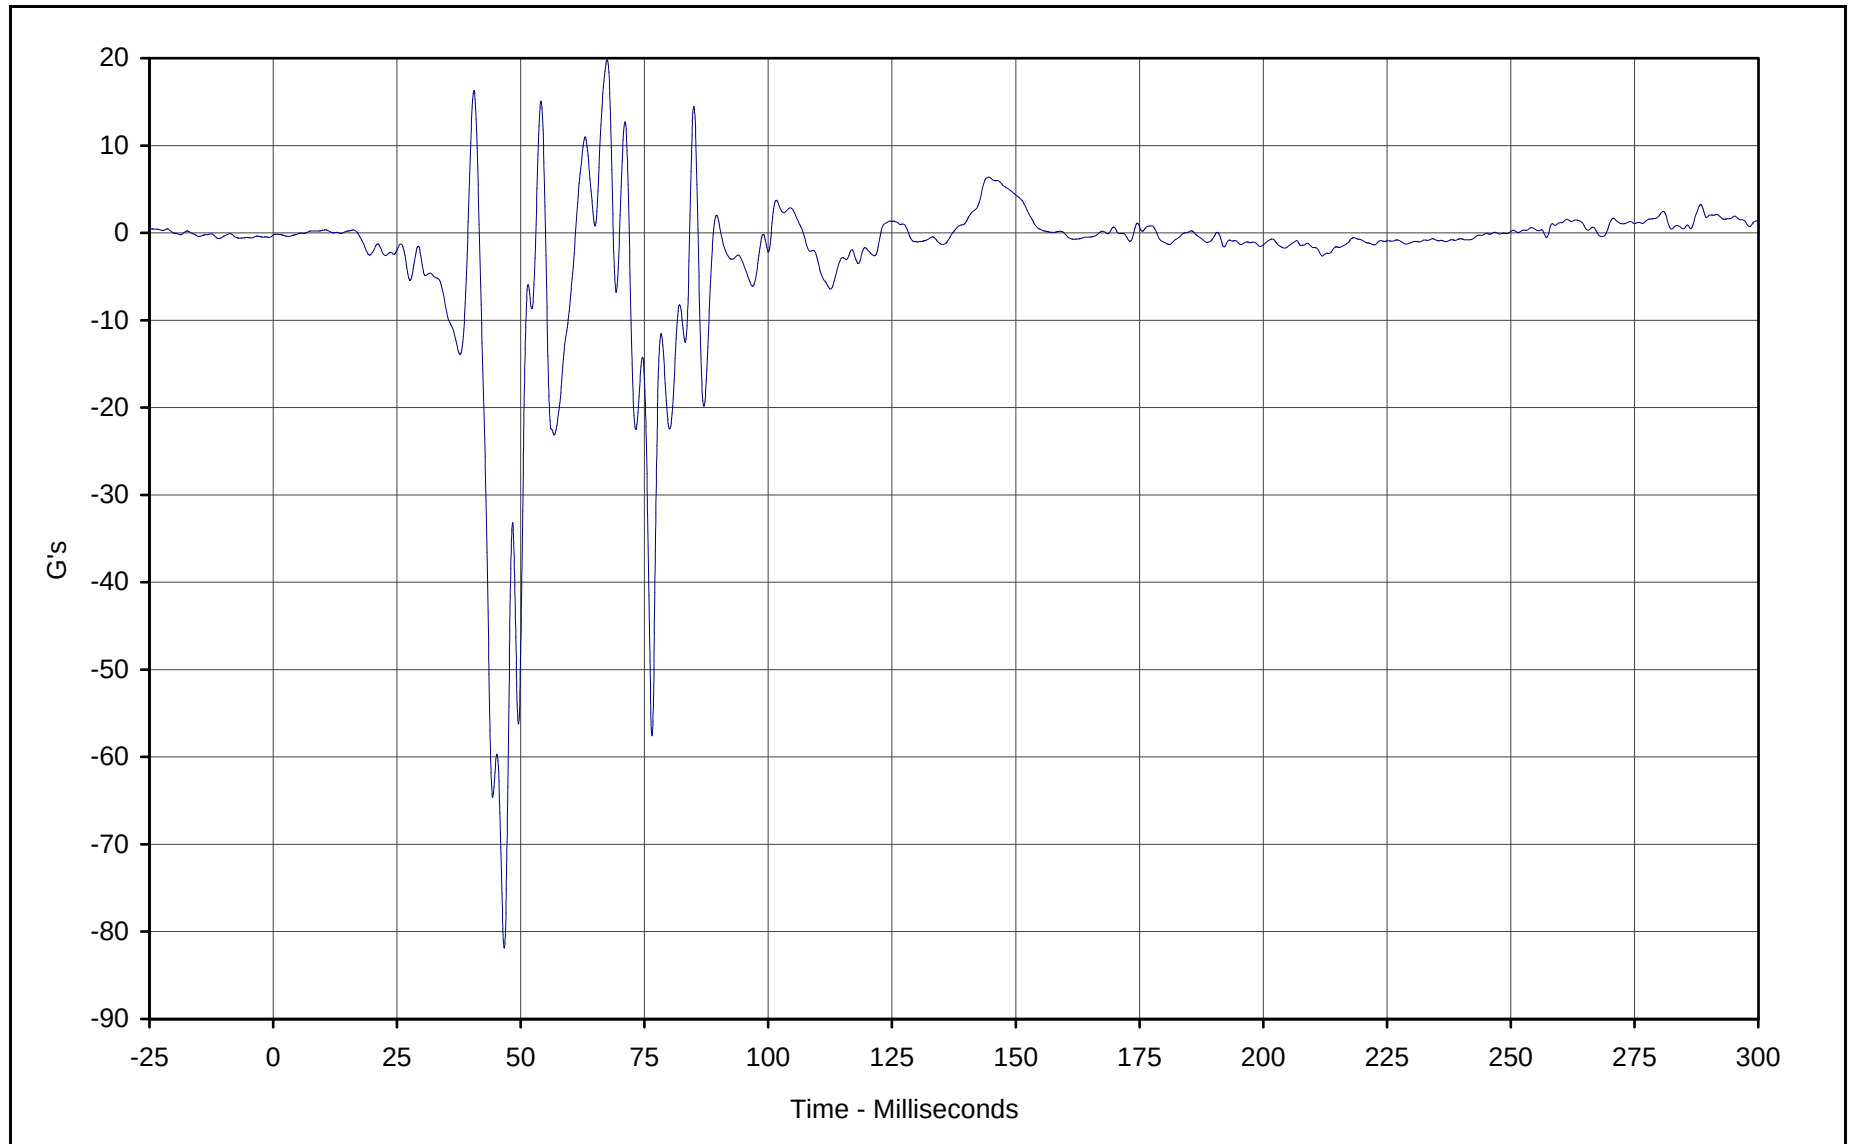


Curve Description: Passenger Right Foot Fore Z
Maximum Value: 19.8 at 67.4 Milliseconds
Minimum Value: -81.9 at 46.7 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: FIL-084

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-119

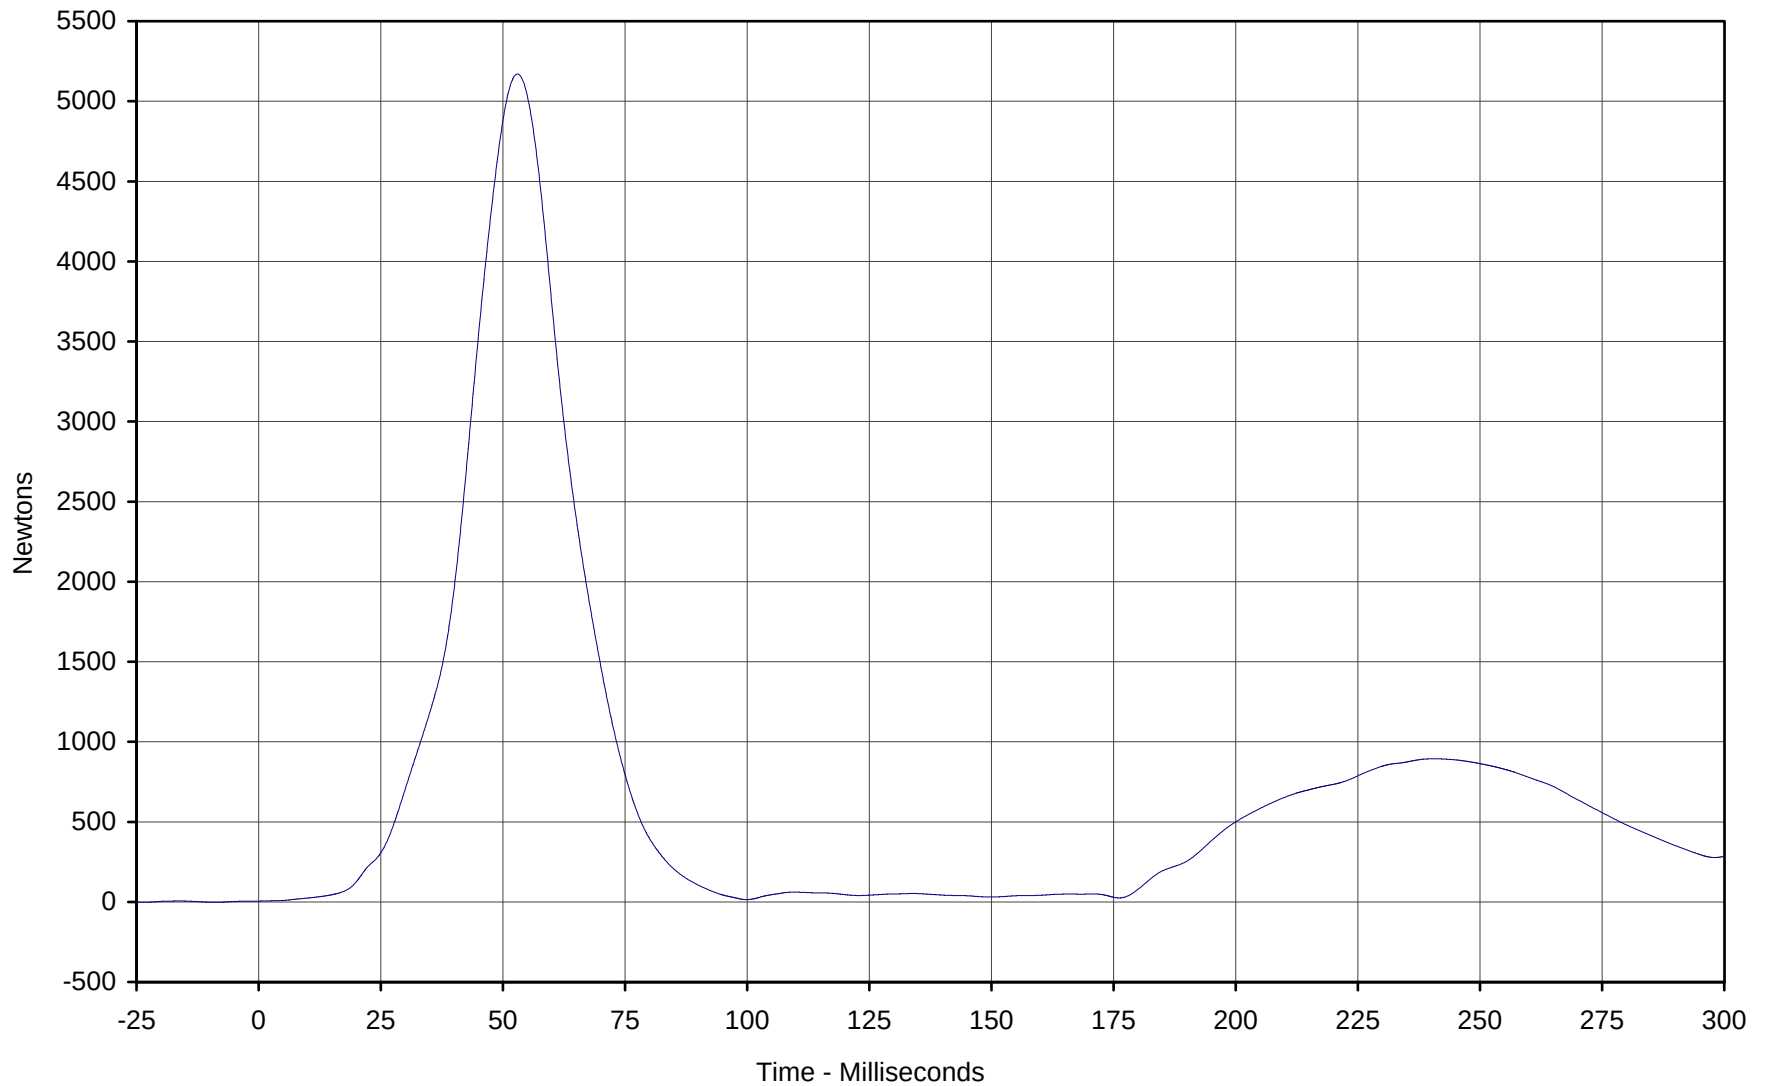


Curve Description: Passenger Lap Belt Force
Maximum Value: 5170.1 at 53.0 Milliseconds
Minimum Value: 4.9 at 0.0 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-085

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-120

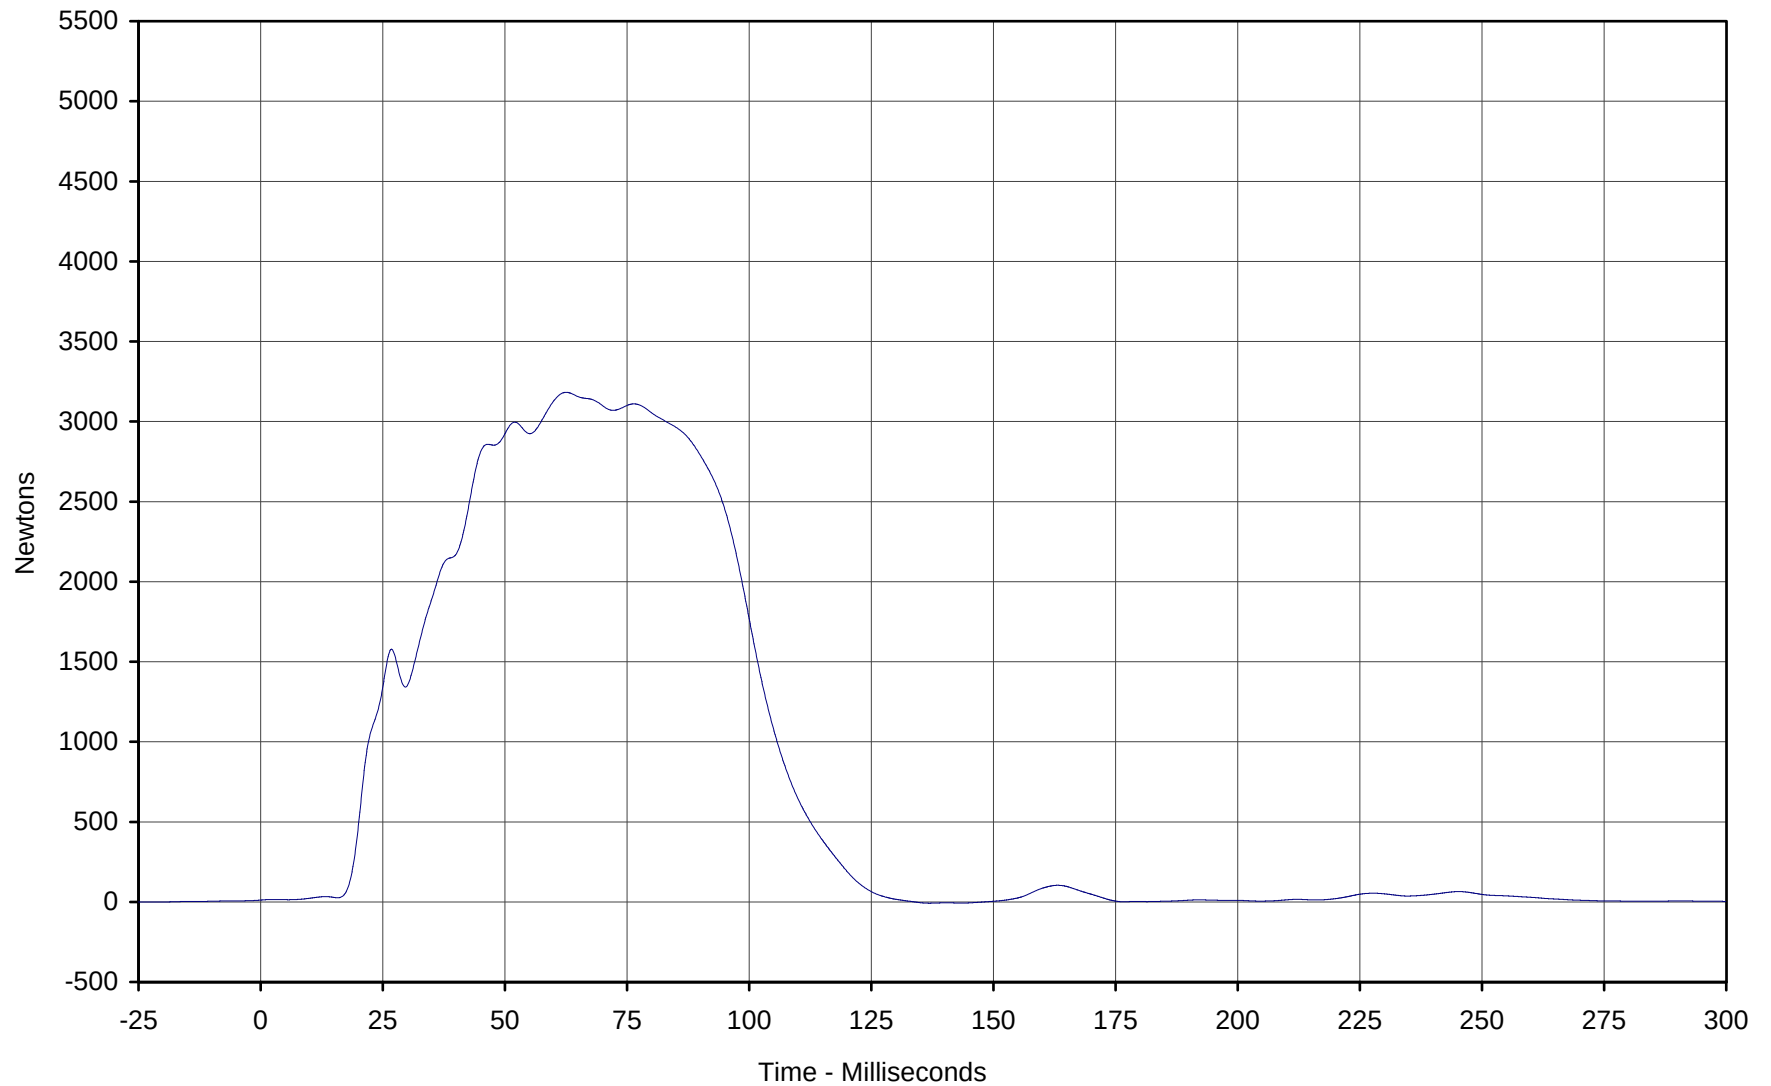


Curve Description: Passenger Shoulder Belt Force
Maximum Value: 3182.3 at 62.5 Milliseconds
Minimum Value: -8.0 at 136.9 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-086

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-121

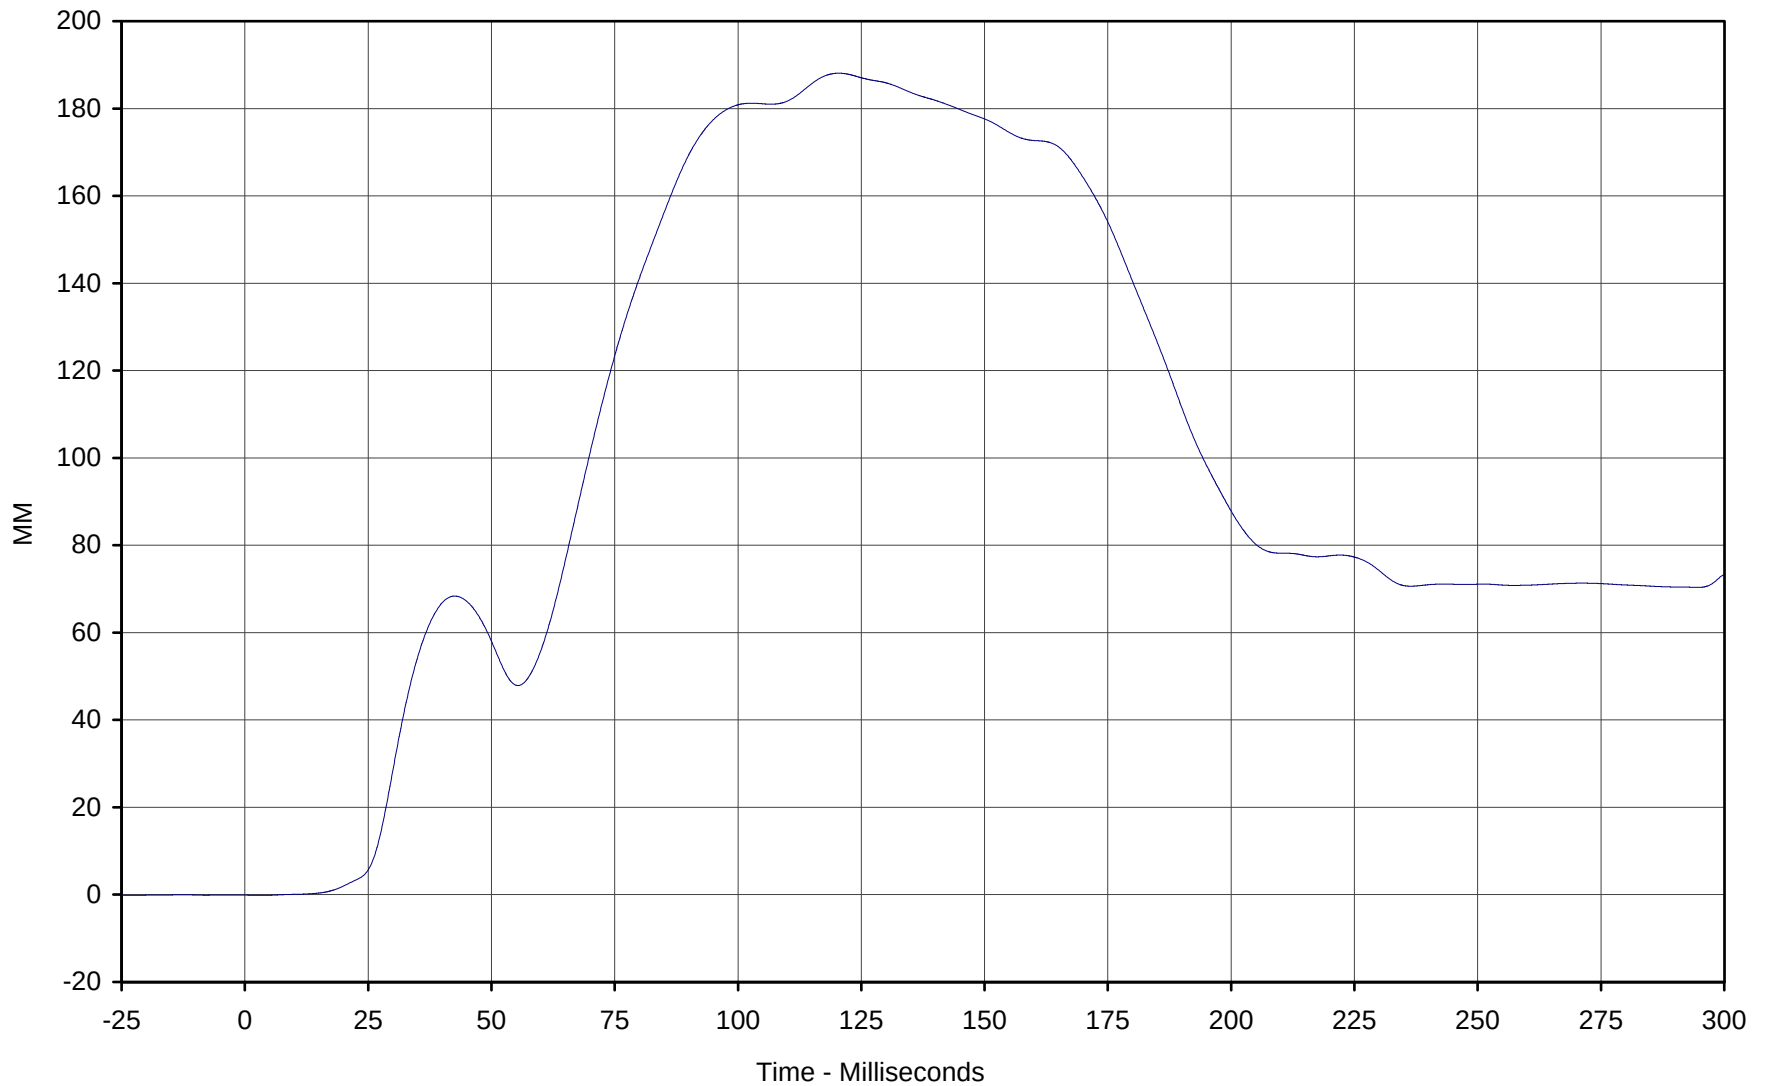


Curve Description: Passenger Shoulder Belt Pullout
Maximum Value: 188.1 at 120.4 Milliseconds
Minimum Value: -0.2 at 3.8 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-087

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-122

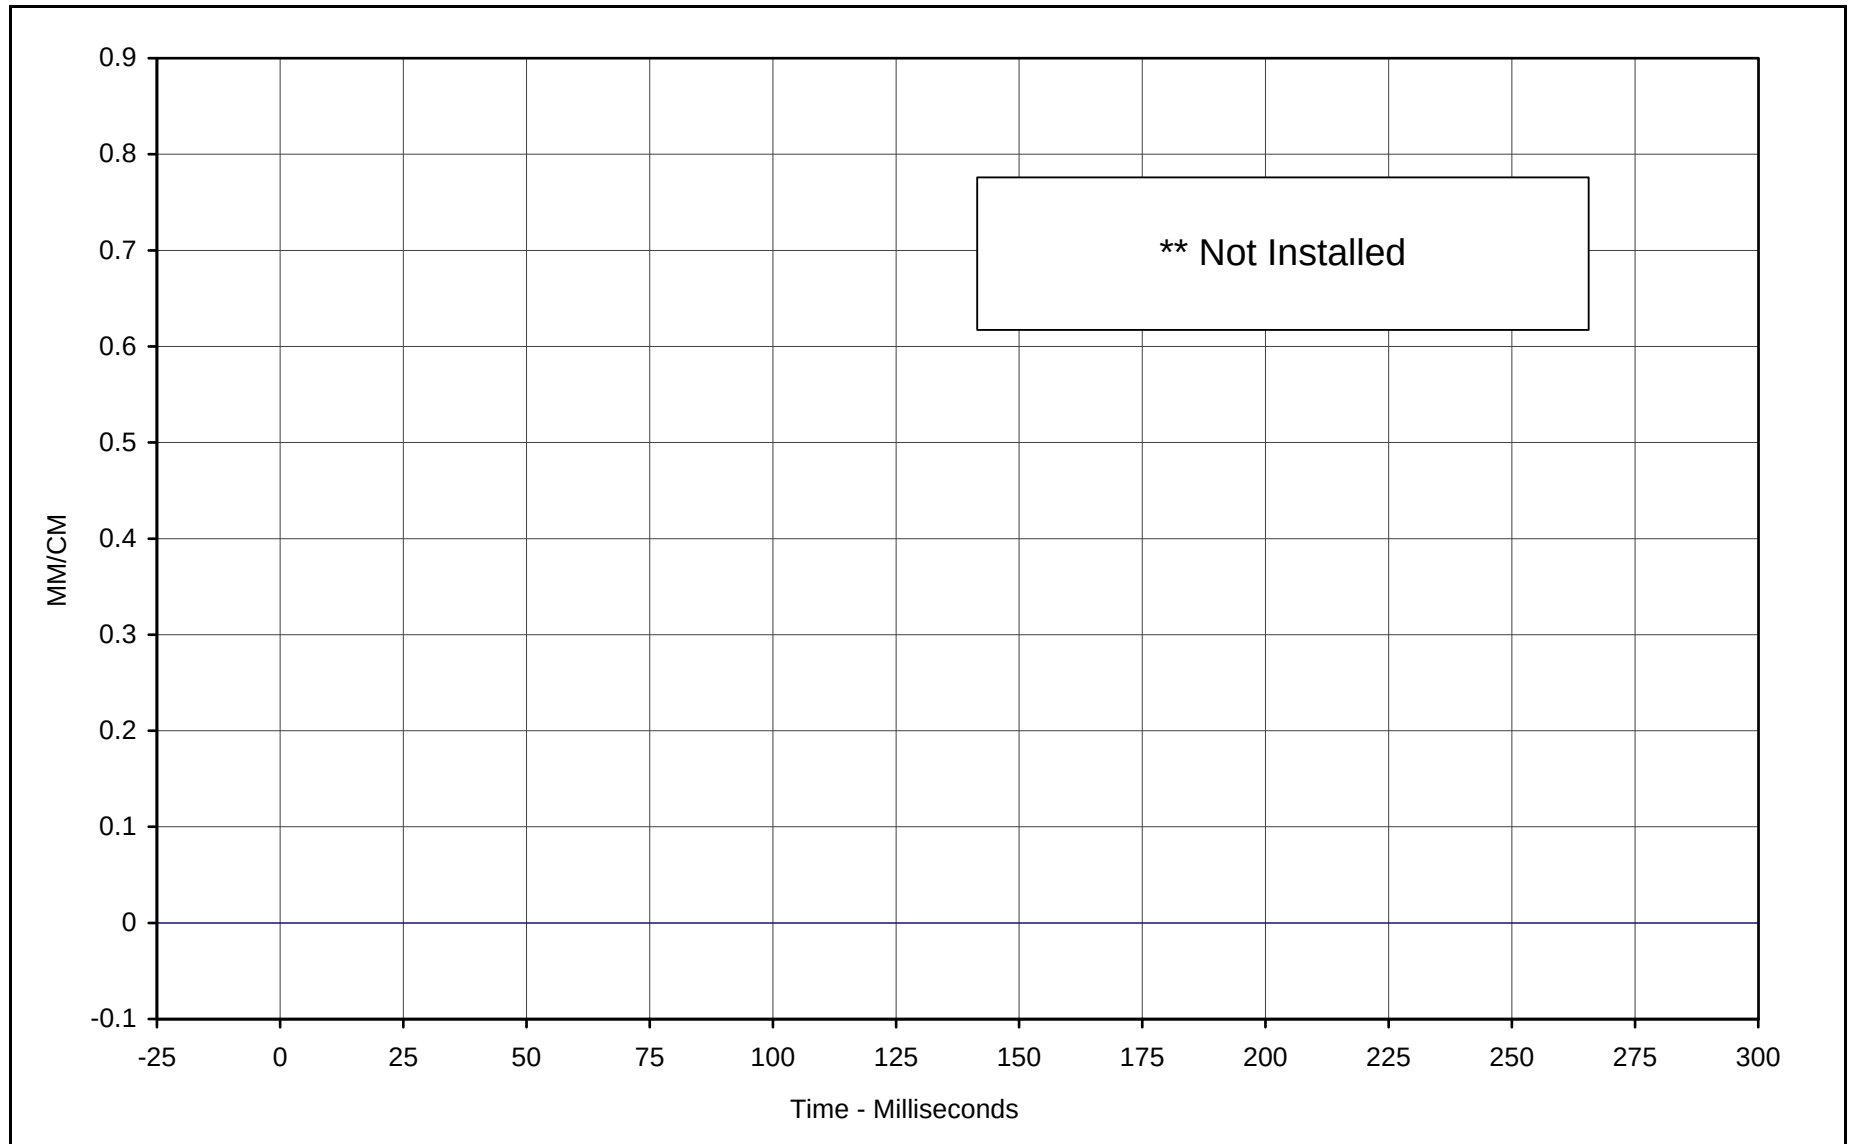

Curve Description: Passenger Shoulder Belt Elongation **

Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Maximum Value: 0.0 at 0.0 Milliseconds

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

Minimum Value: 0.0 at 0.0 Milliseconds

SAE Filter Class: 60

Date of Test: 02/13/01


Curve Number: FIL-088

** Not installed



KAR21001-10

B-123

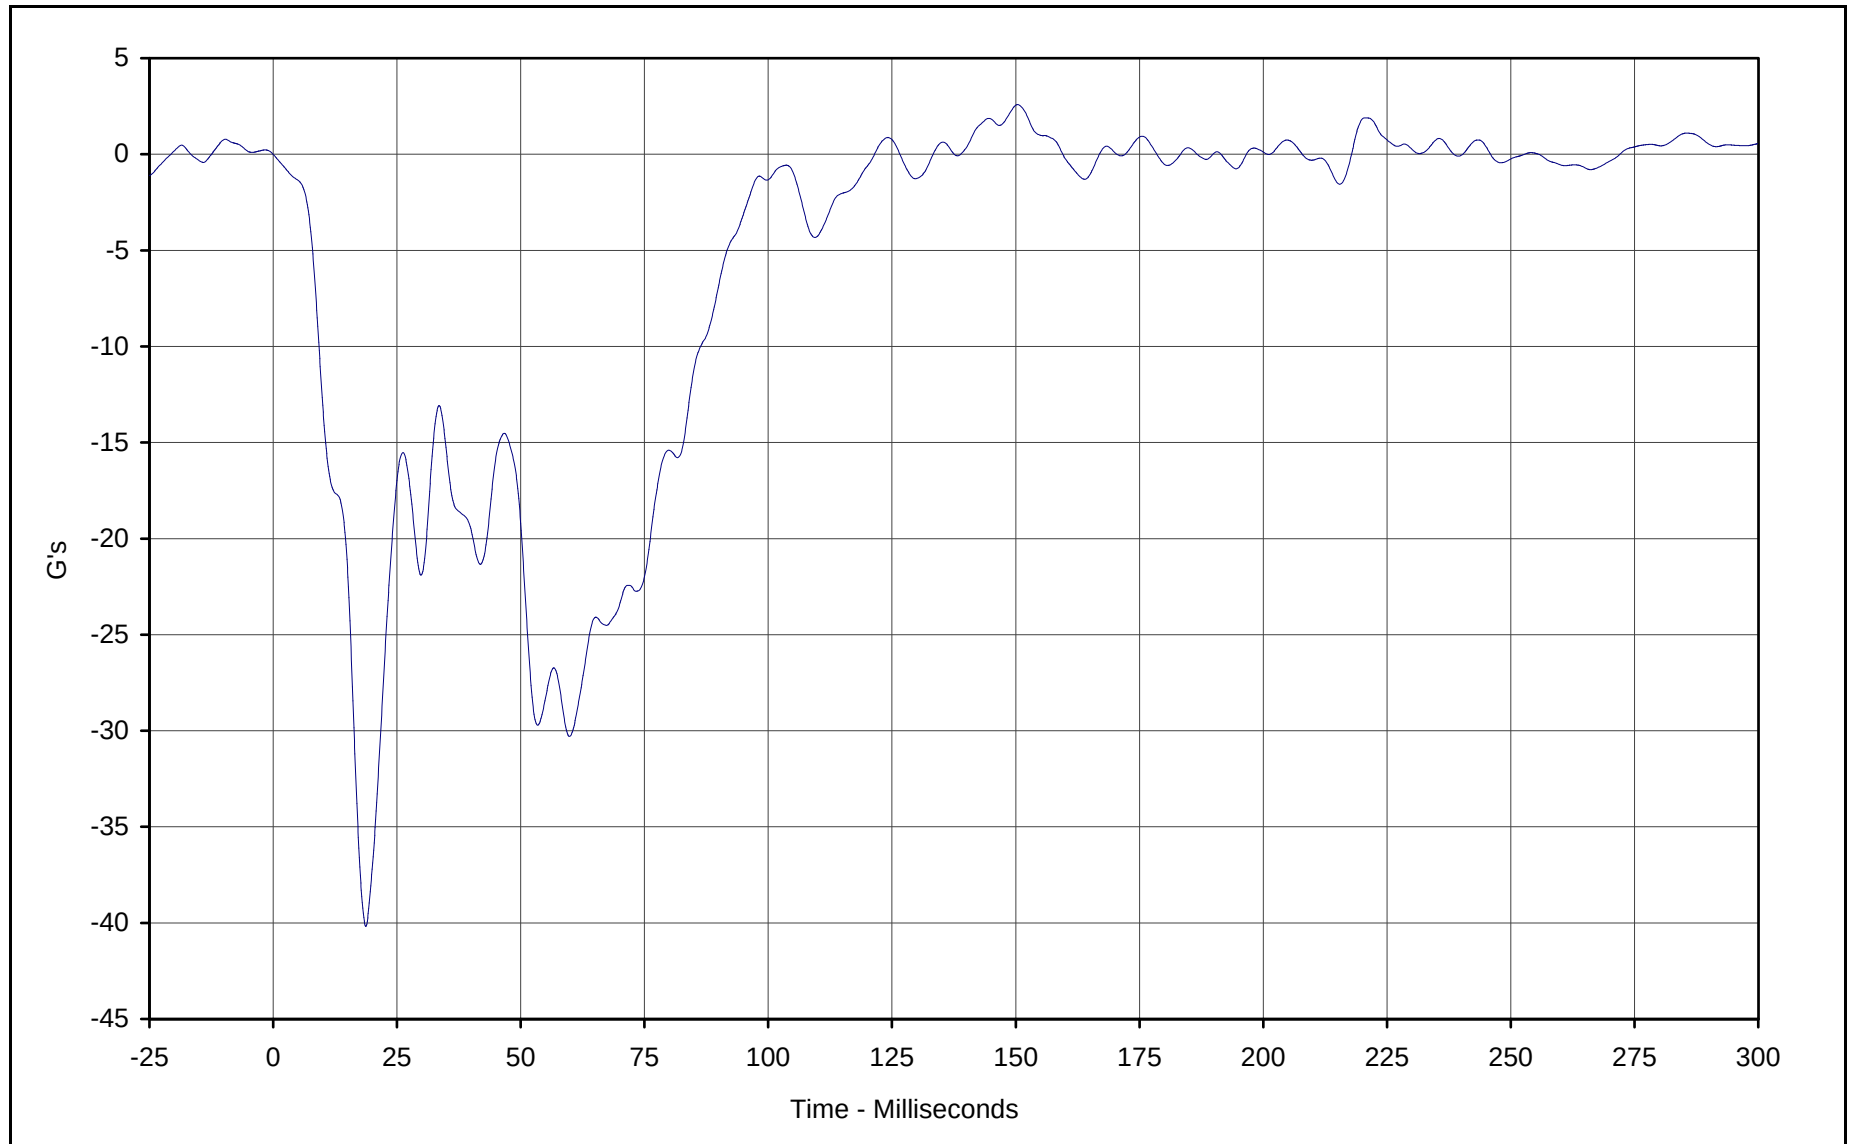


Curve Description: Vehicle Left Rear Primary
Maximum Value: 2.6 at 150.4 Milliseconds
Minimum Value: -40.2 at 18.7 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-089

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-124

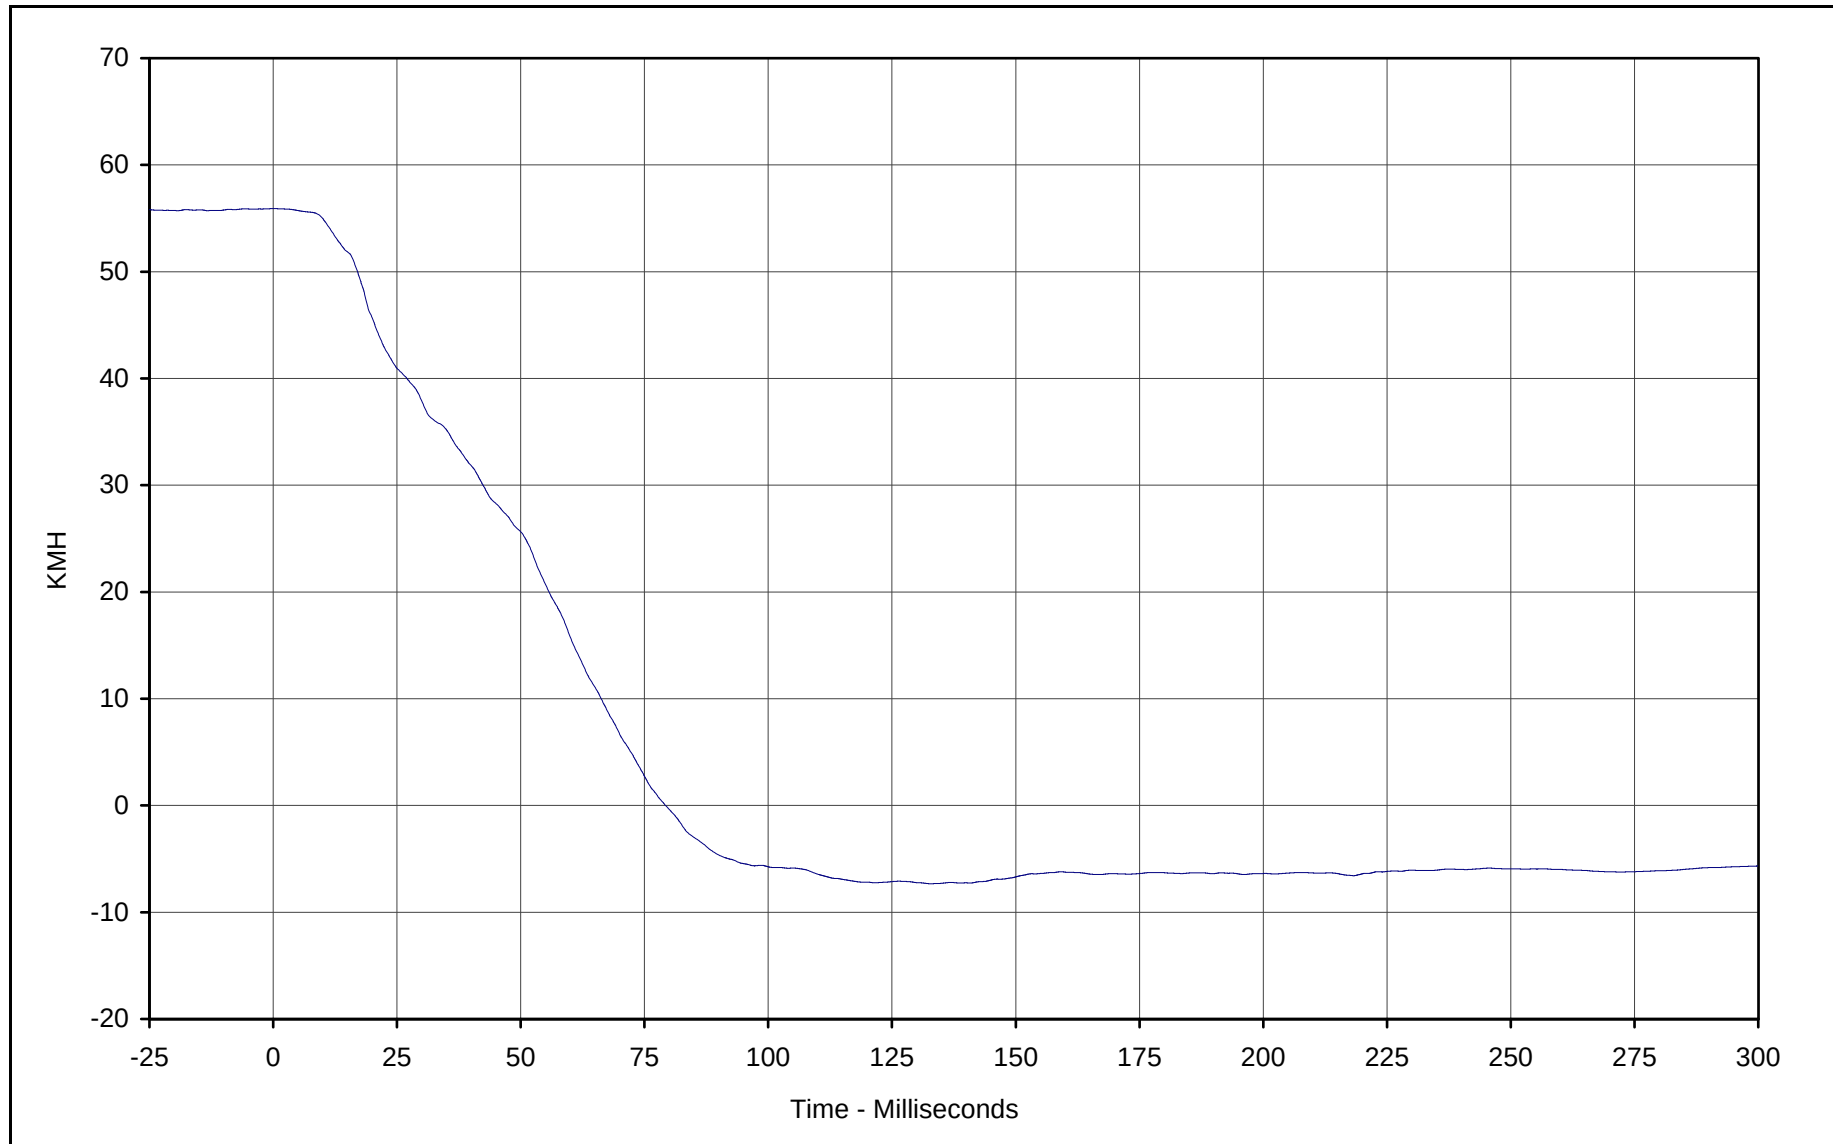


Curve Description: Vehicle Left Rear Primary Velocity
Maximum Value: 55.9 at 0.1 Milliseconds
Minimum Value: -7.3 at 132.8 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: IN1-089

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-125

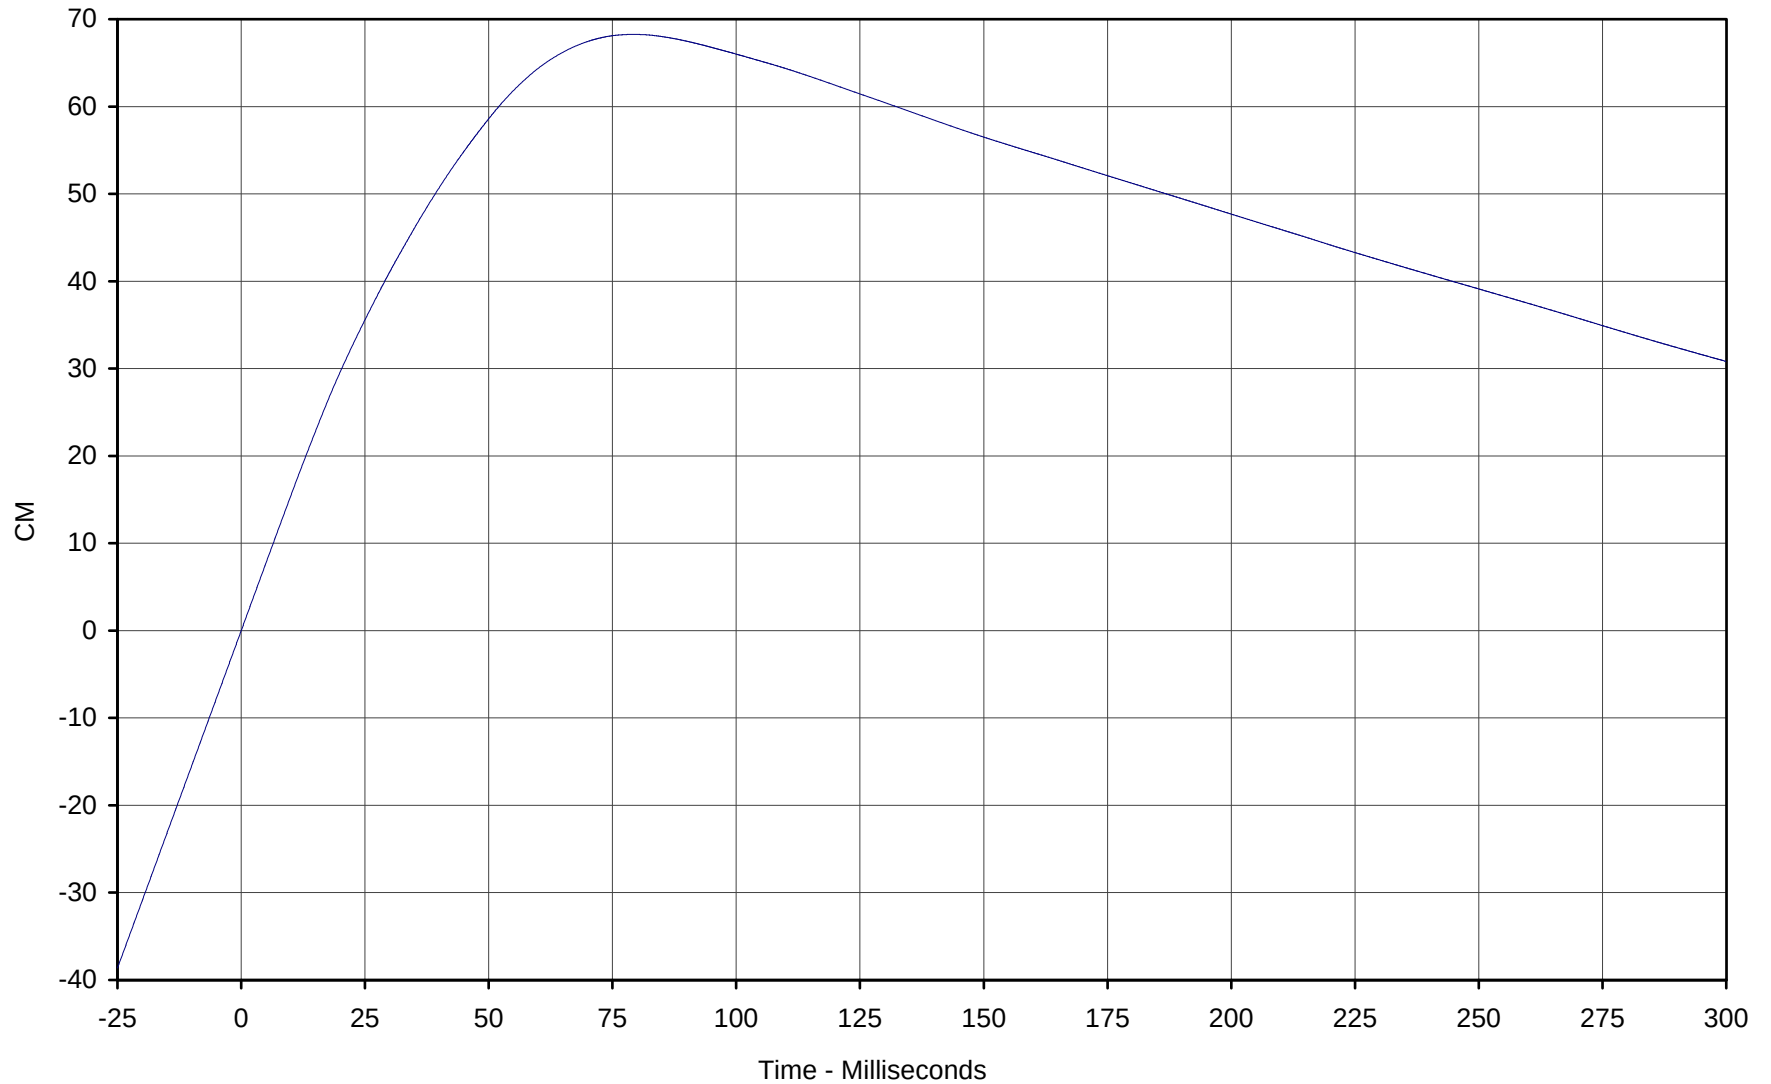


Curve Description: Vehicle Left Rear Primary Displ.
Maximum Value: 68.3 at 79.3 Milliseconds
Minimum Value: 0.0 at 0.0 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: IN2-089

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-126

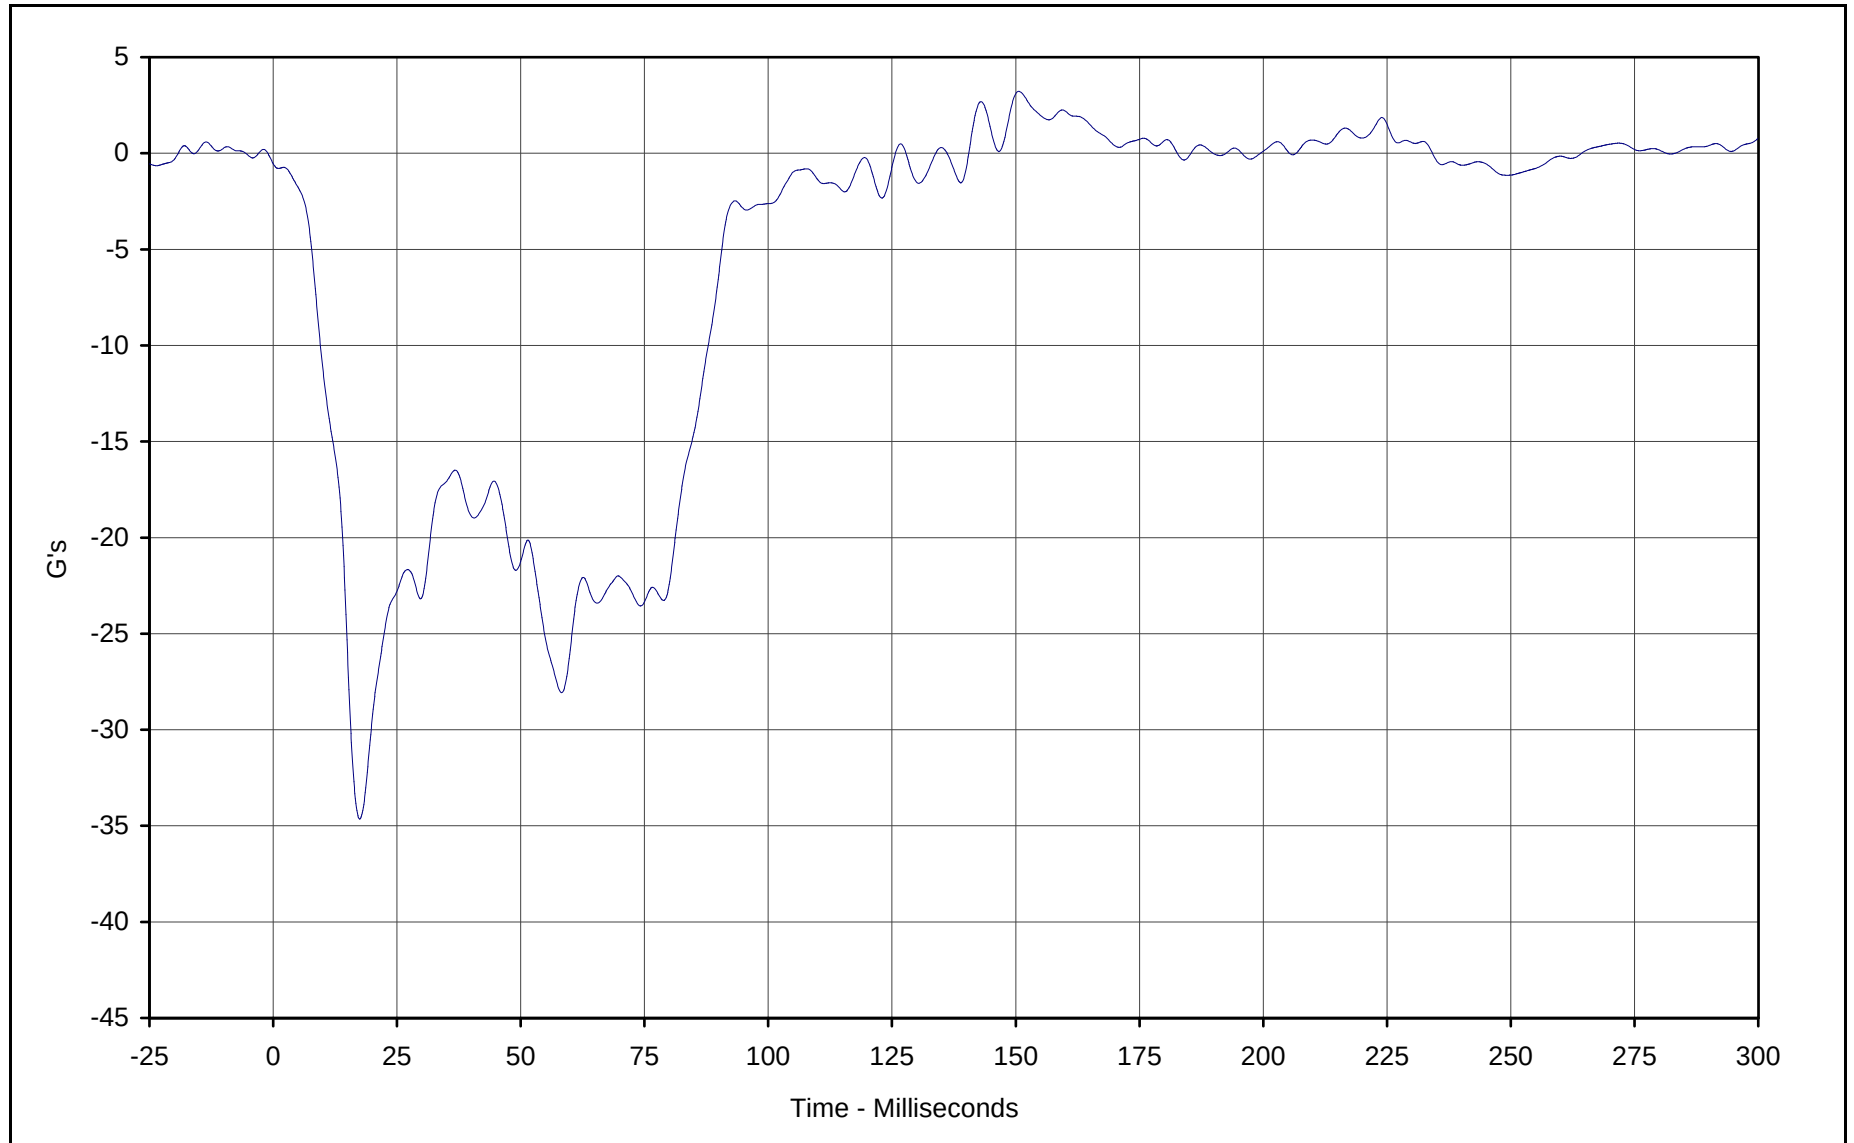


Curve Description: Vehicle Right Rear Primary
Maximum Value: 3.2 at 150.6 Milliseconds
Minimum Value: -34.6 at 17.5 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-090

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-127

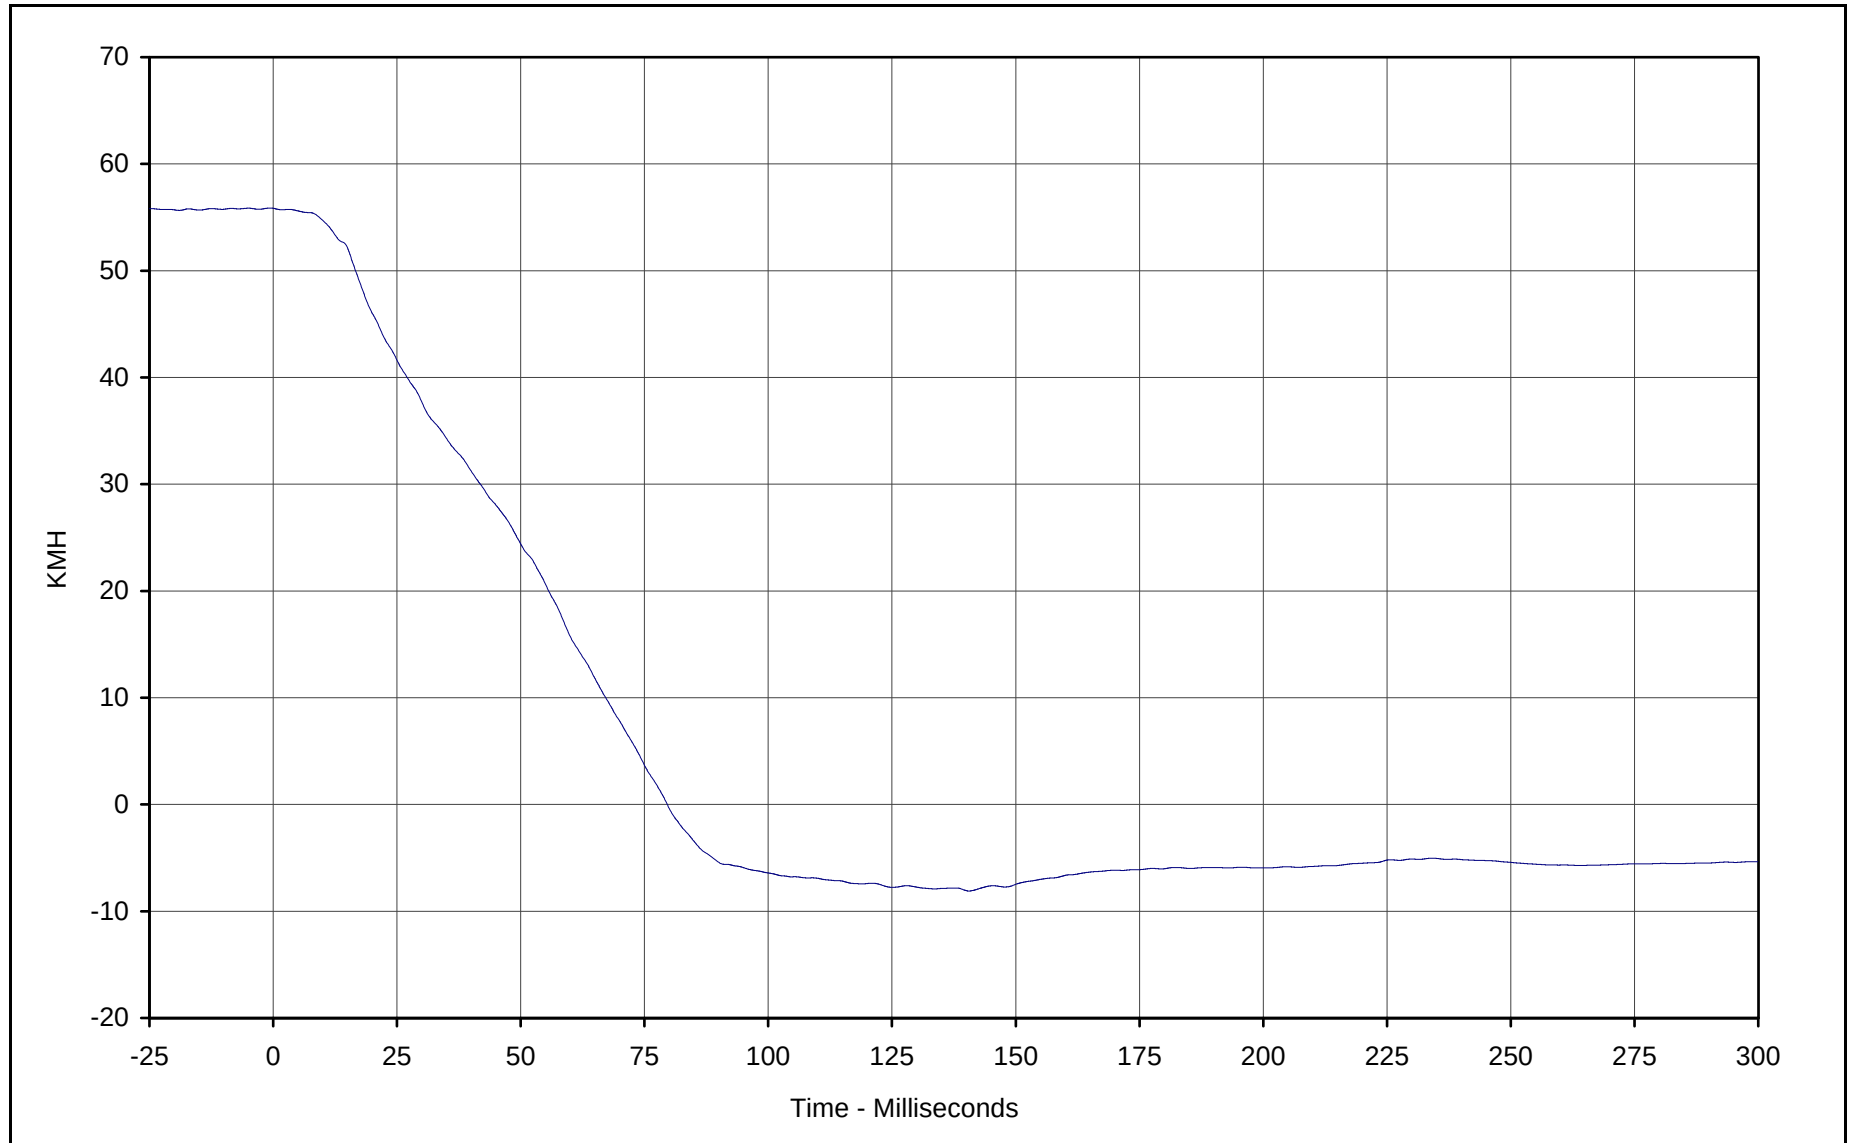


Curve Description: Vehicle Right Rear Primary Velocity
Maximum Value: 55.8 at 0.0 Milliseconds
Minimum Value: -8.1 at 140.6 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: IN1-090

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-128

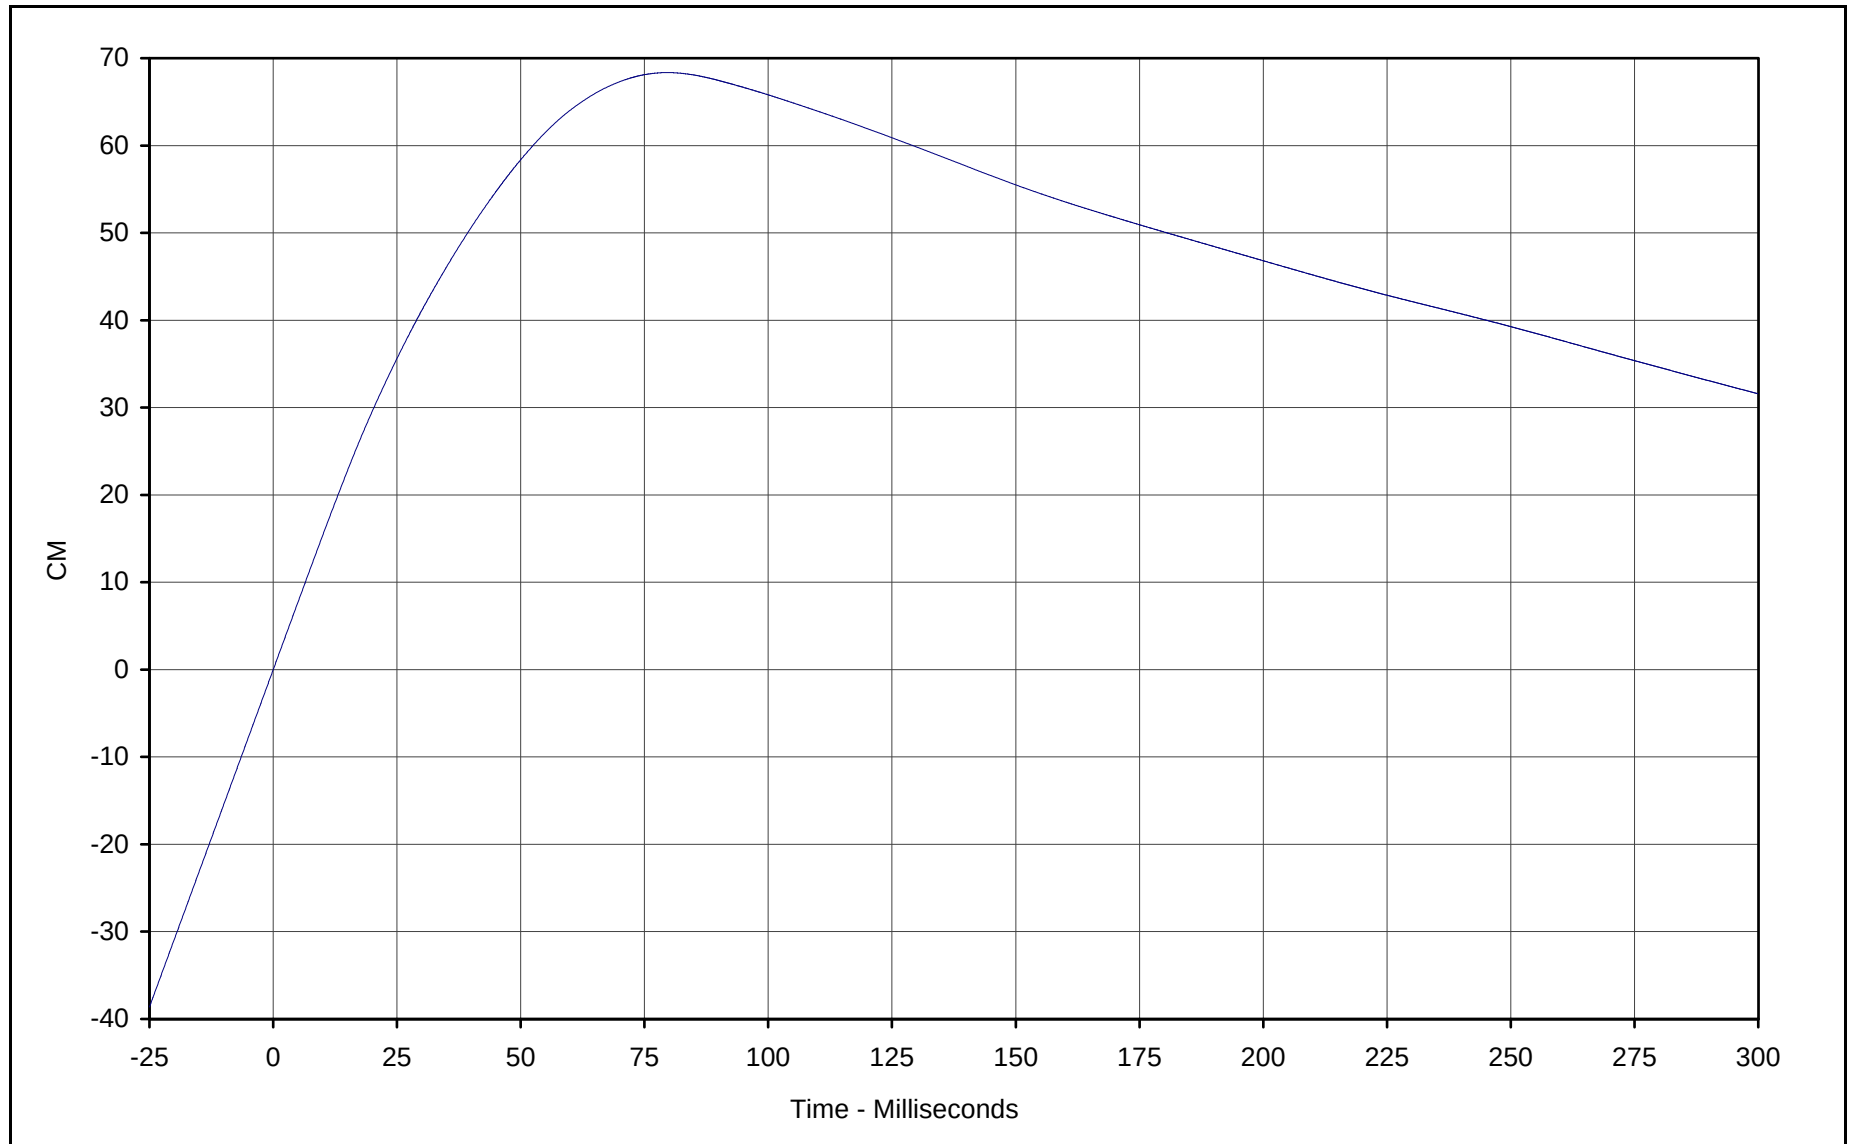


Curve Description: Vehicle Right Rear Primary Displ.
Maximum Value: 68.4 at 79.6 Milliseconds
Minimum Value: 0.0 at 0.0 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: IN2-090

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

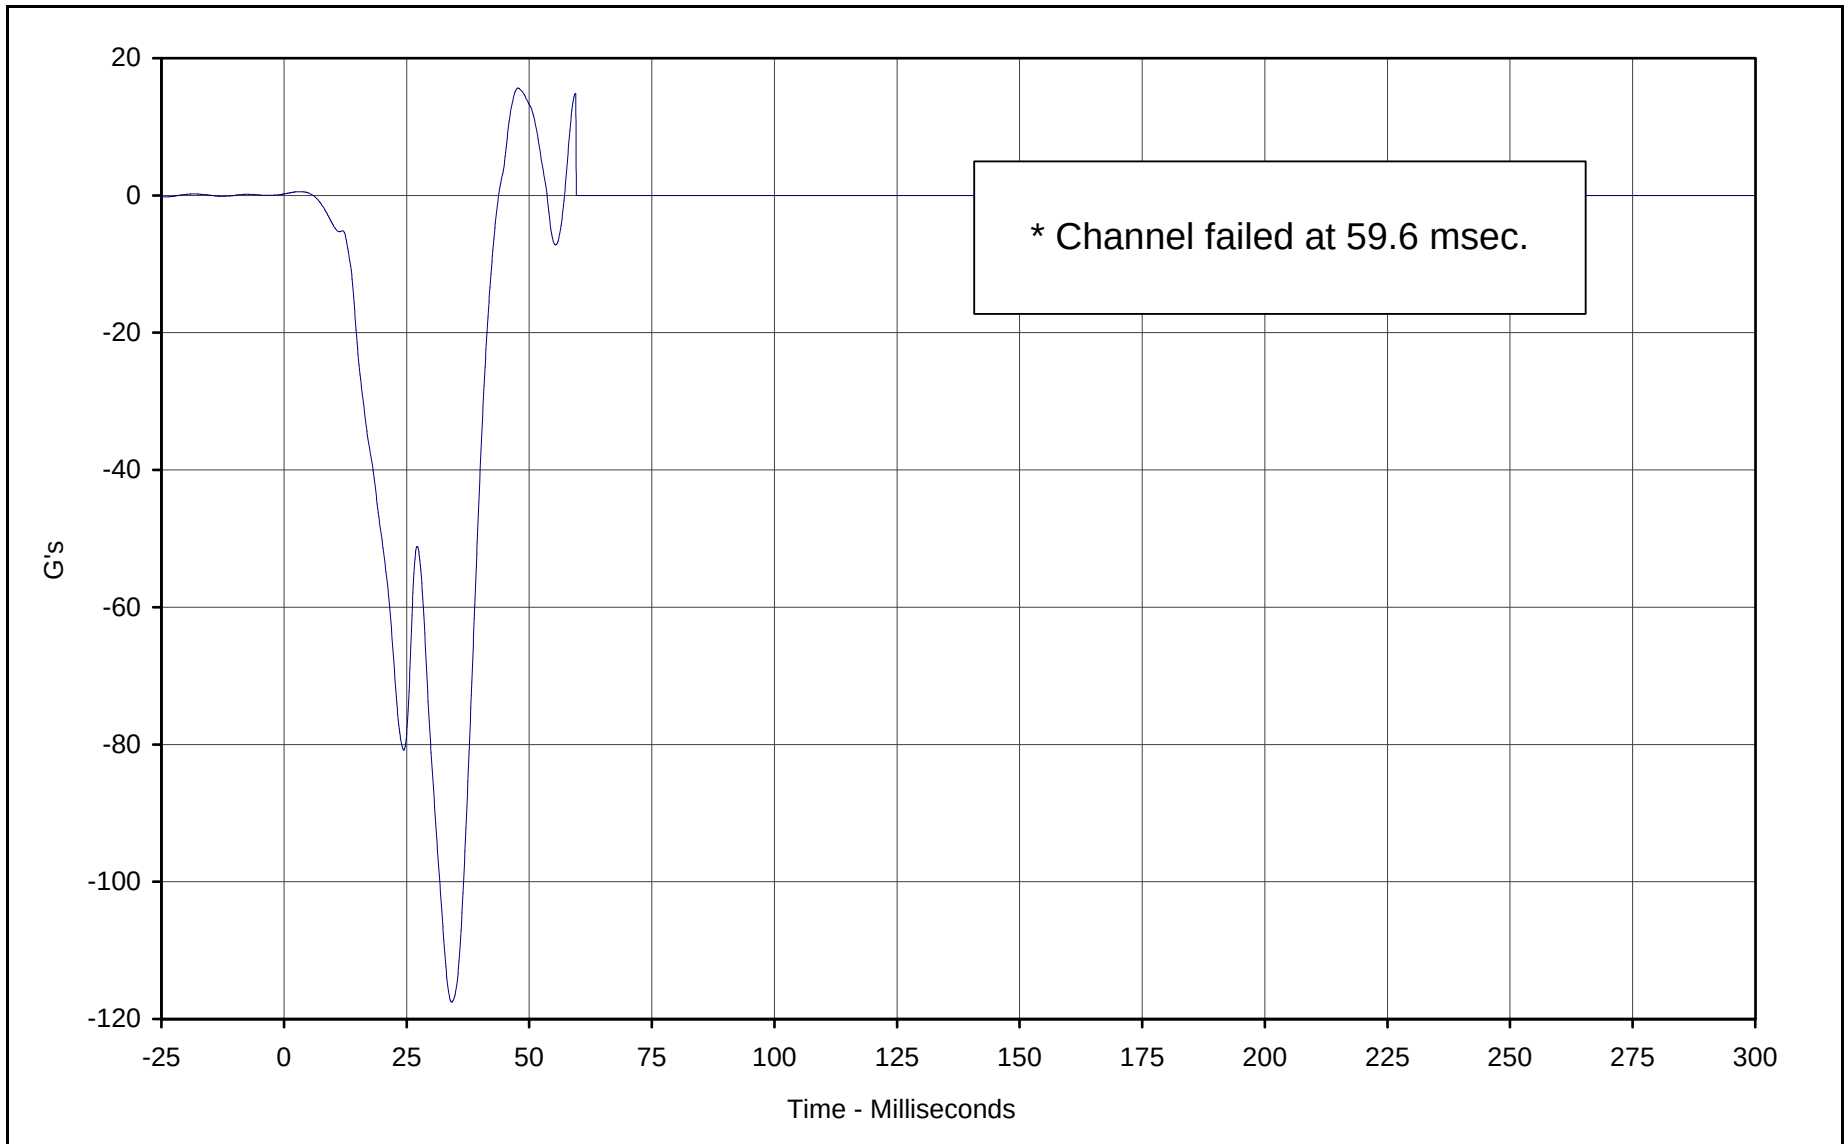

Curve Description: Vehicle Engine Top *

Maximum Value: 15.6 at 47.7 Milliseconds

Minimum Value: -117.5 at 34.2 Milliseconds

SAE Filter Class: 60

Date of Test: 02/13/01

Curve Number: FIL-091


Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

* Channel failed at 59.6 msec.



B-130

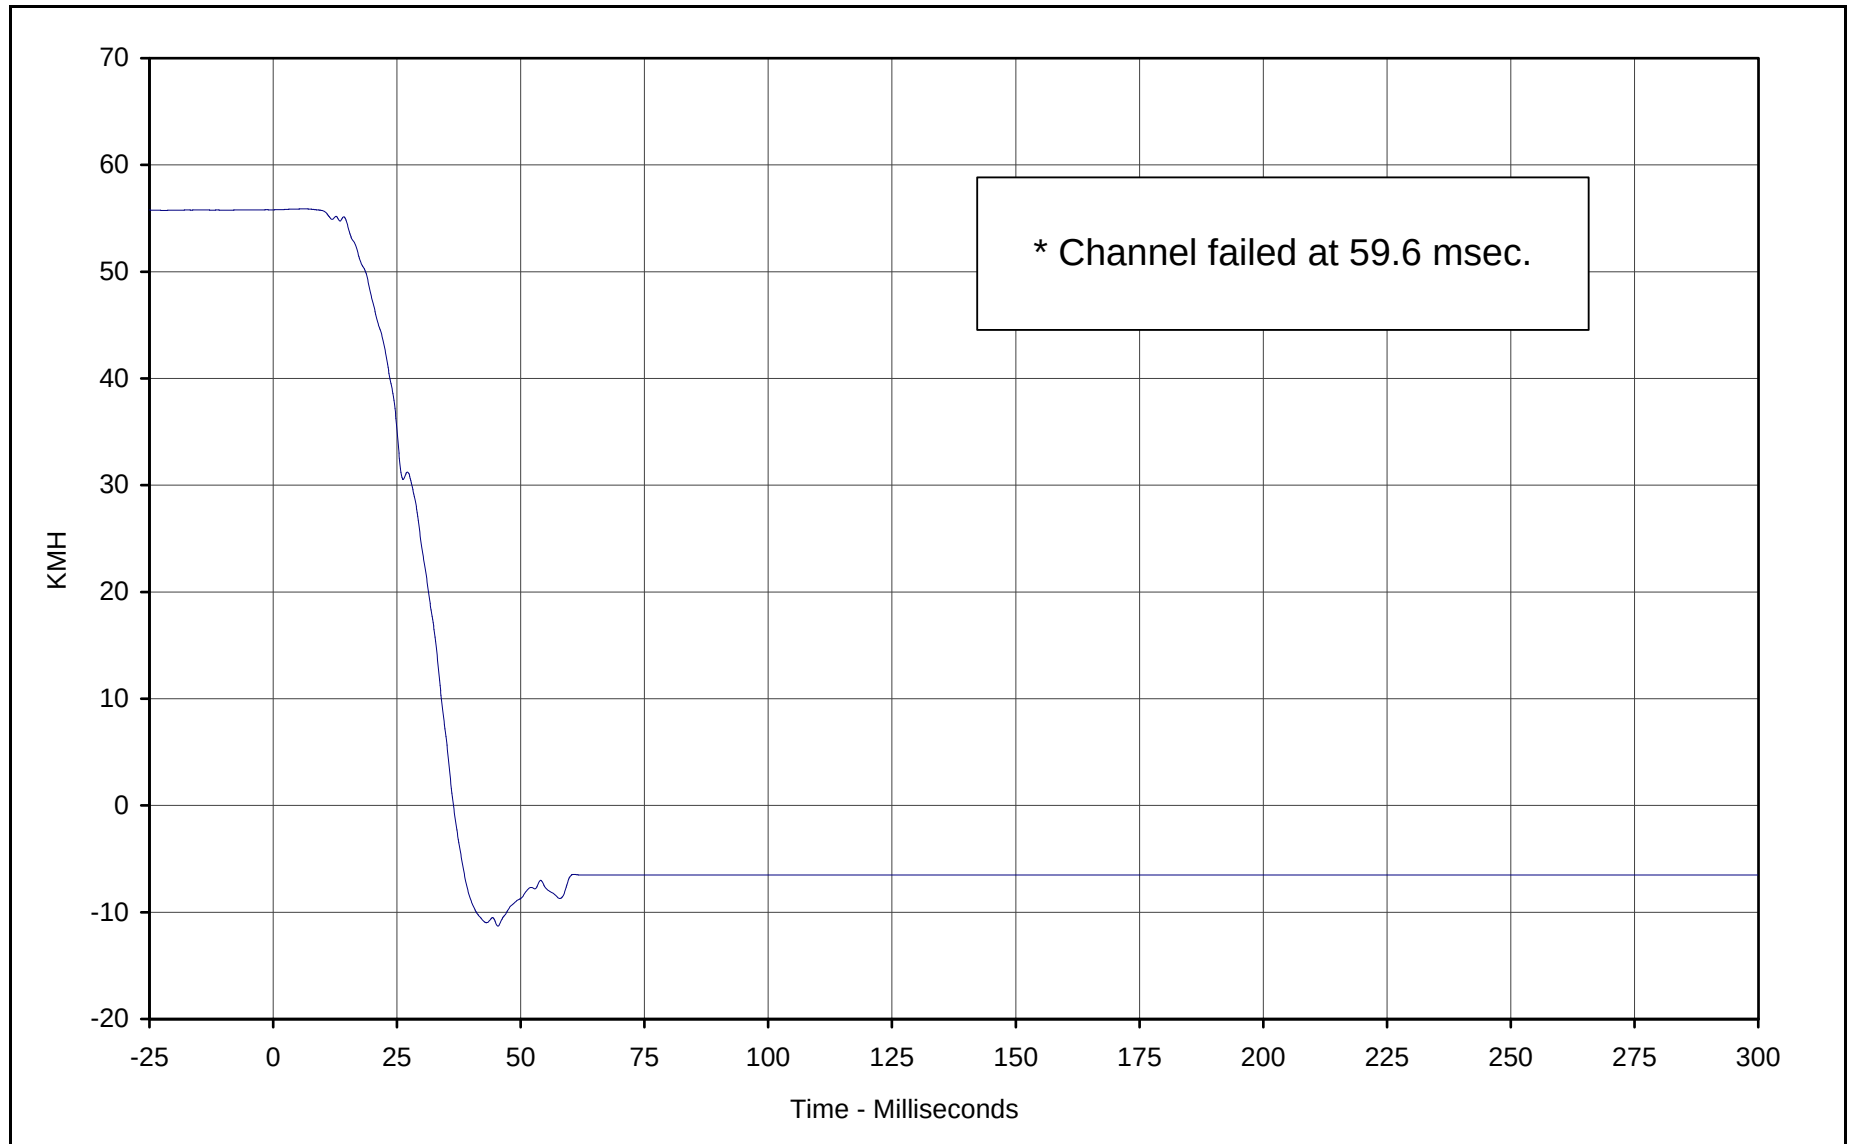

Curve Description: Vehicle Engine Top Velocity *

Maximum Value: 55.9 at 6.3 Milliseconds

Minimum Value: -11.3 at 45.4 Milliseconds

SAE Filter Class: 180

Date of Test: 02/13/01

Curve Number: IN1-091

Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup


* Channel failed ta 59.6 msec.



KAR21001-10

B-131

KAR21001-10

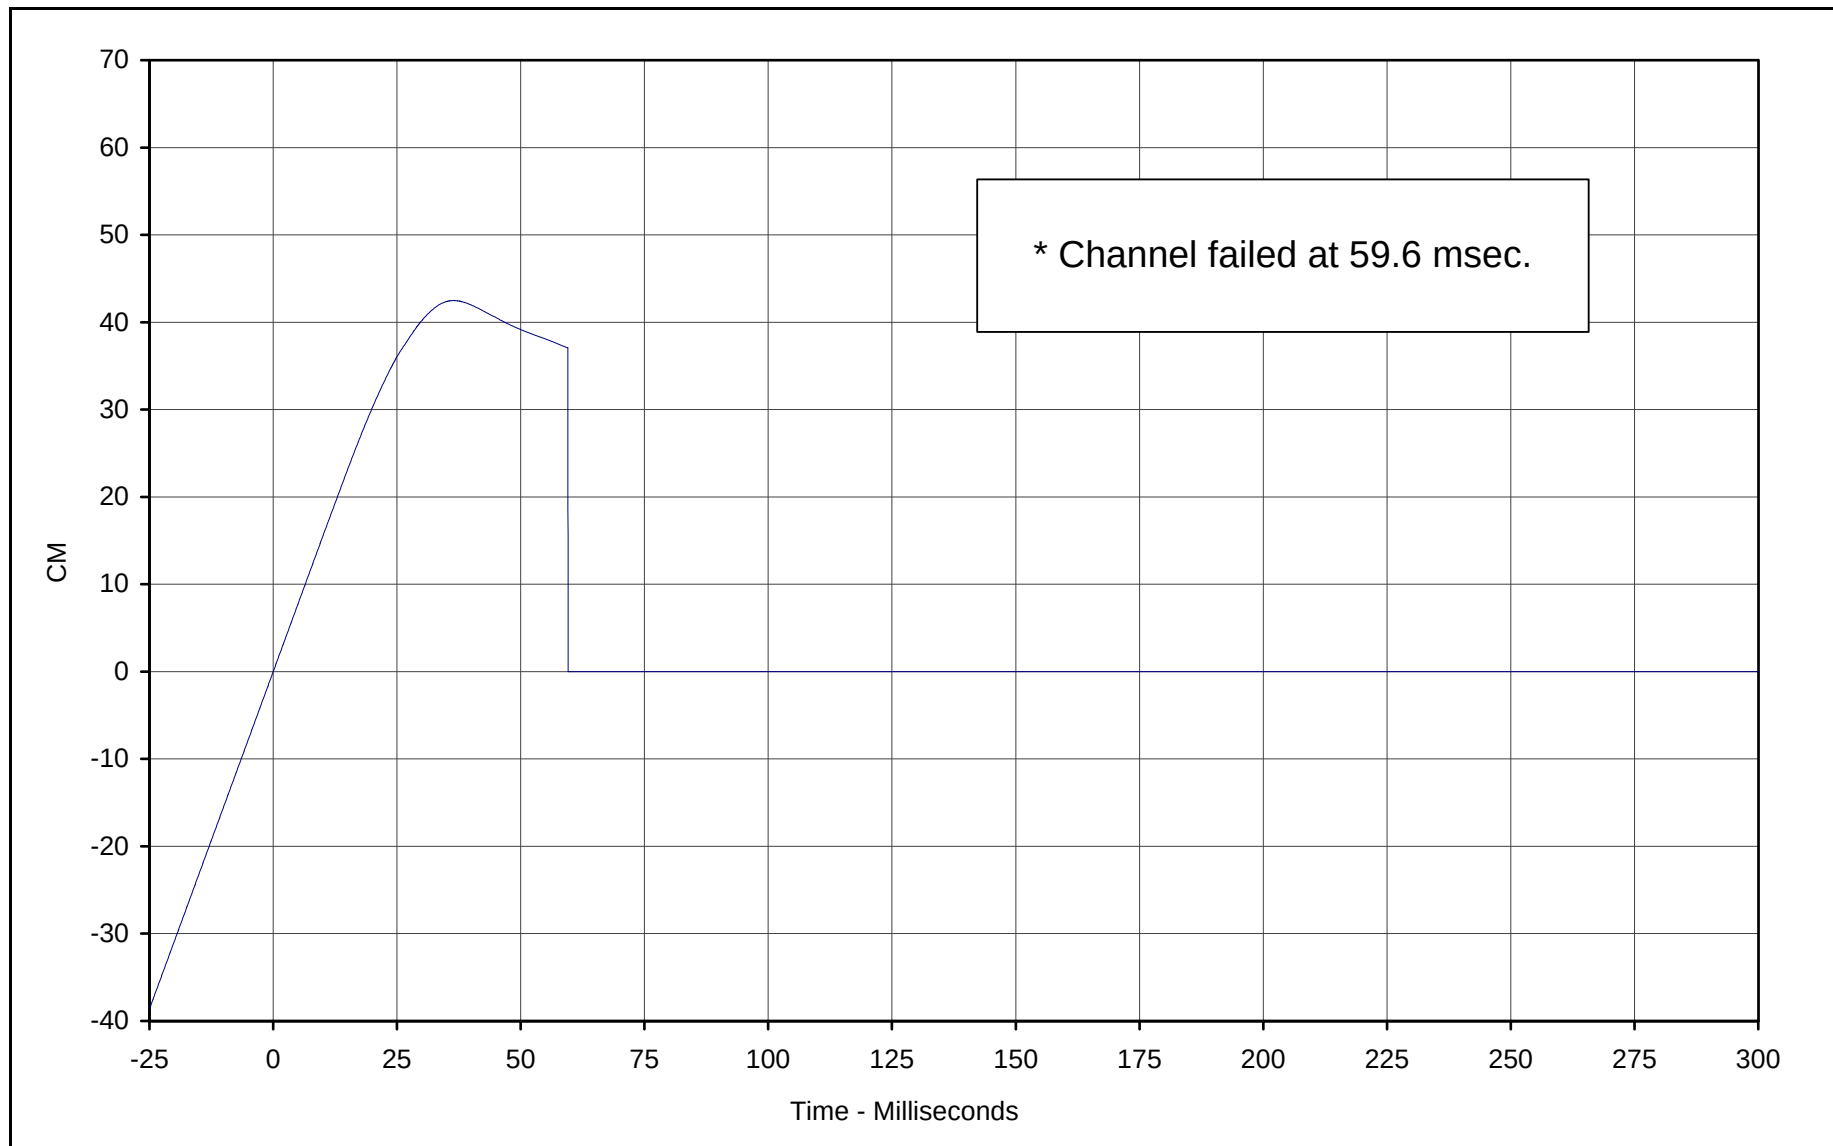

Curve Description: Vehicle Engine Top Displacement *

Maximum Value: 42.5 at 36.4 Milliseconds

Minimum Value: 0.0 at 0.0 Milliseconds

SAE Filter Class: 180

Date of Test: 02/13/01


Curve Number: IN2-091

Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

* Channel failed at 59.6 msec.



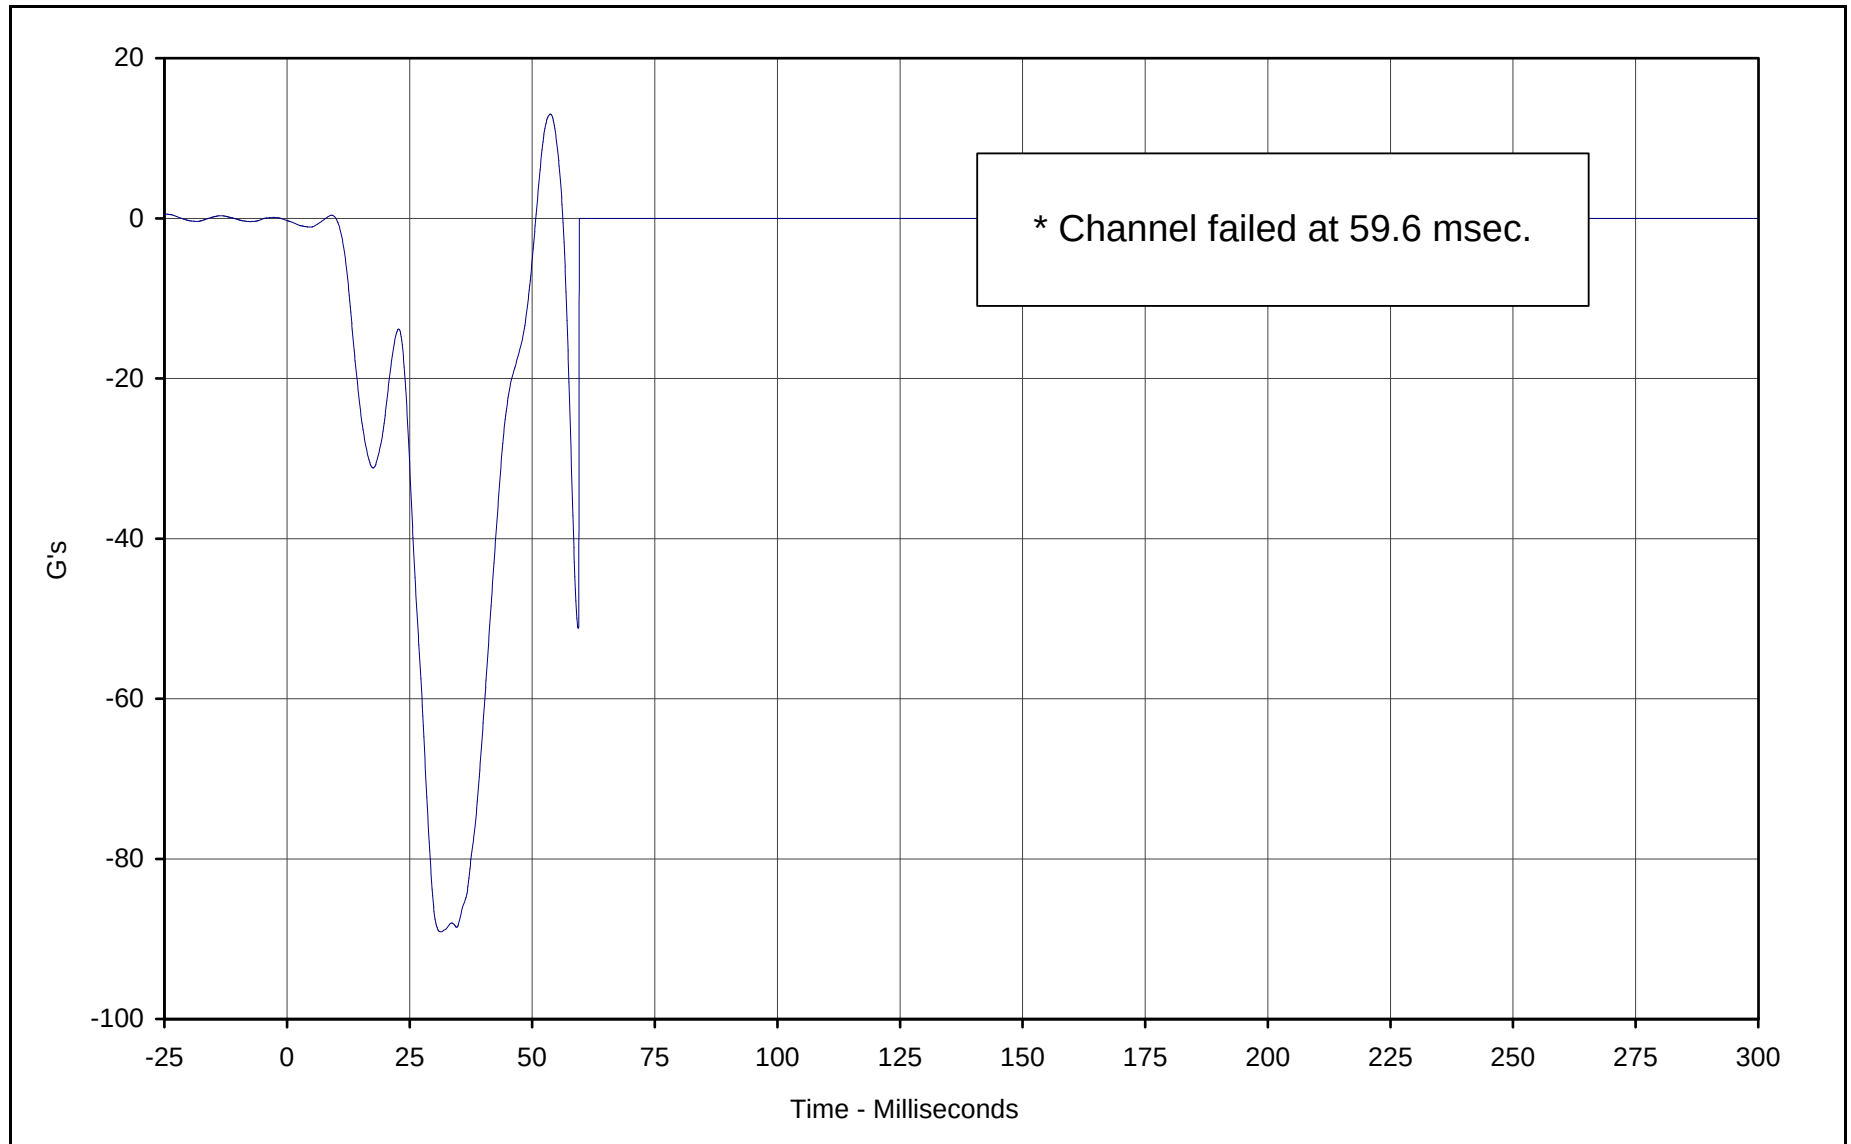

Curve Description: Vehicle Engine Bottom *

Maximum Value: 13.0 at 53.7 Milliseconds

Minimum Value: -89.1 at 31.3 Milliseconds

SAE Filter Class: 60

Date of Test: 02/13/01

Curve Number: FIL-092


Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

* Channel failed at 59.6 msec.



B-133

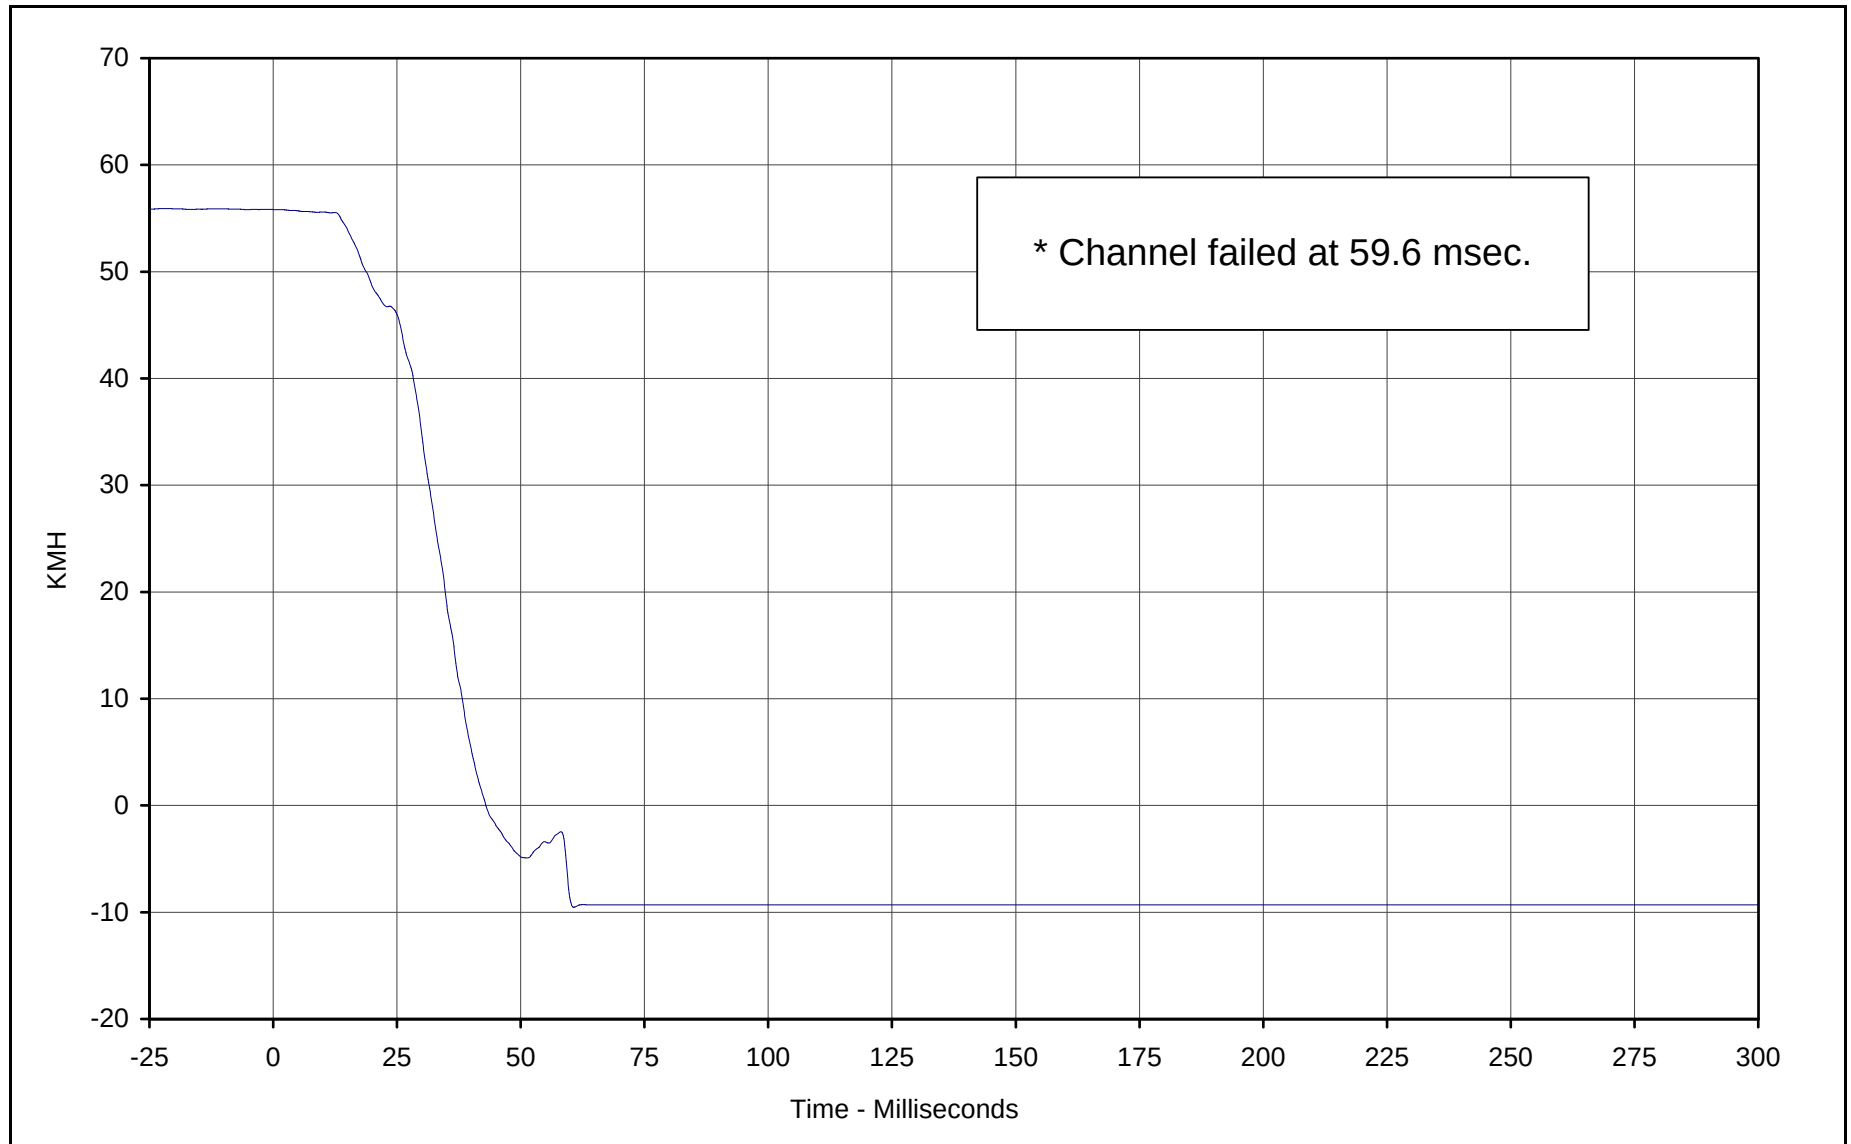

Curve Description: Vehicle Engine Bottom Velocity *

Maximum Value: 55.8 at 0.0 Milliseconds

Minimum Value: -9.5 at 60.7 Milliseconds

SAE Filter Class: 180

Date of Test: 02/13/01

Curve Number: IN1-092

Test Program: 2001 NHTSA 35mph NCAP No.: M10303


Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

* Channel failed ta 59.6 msec.



KAR21001-10

B-134

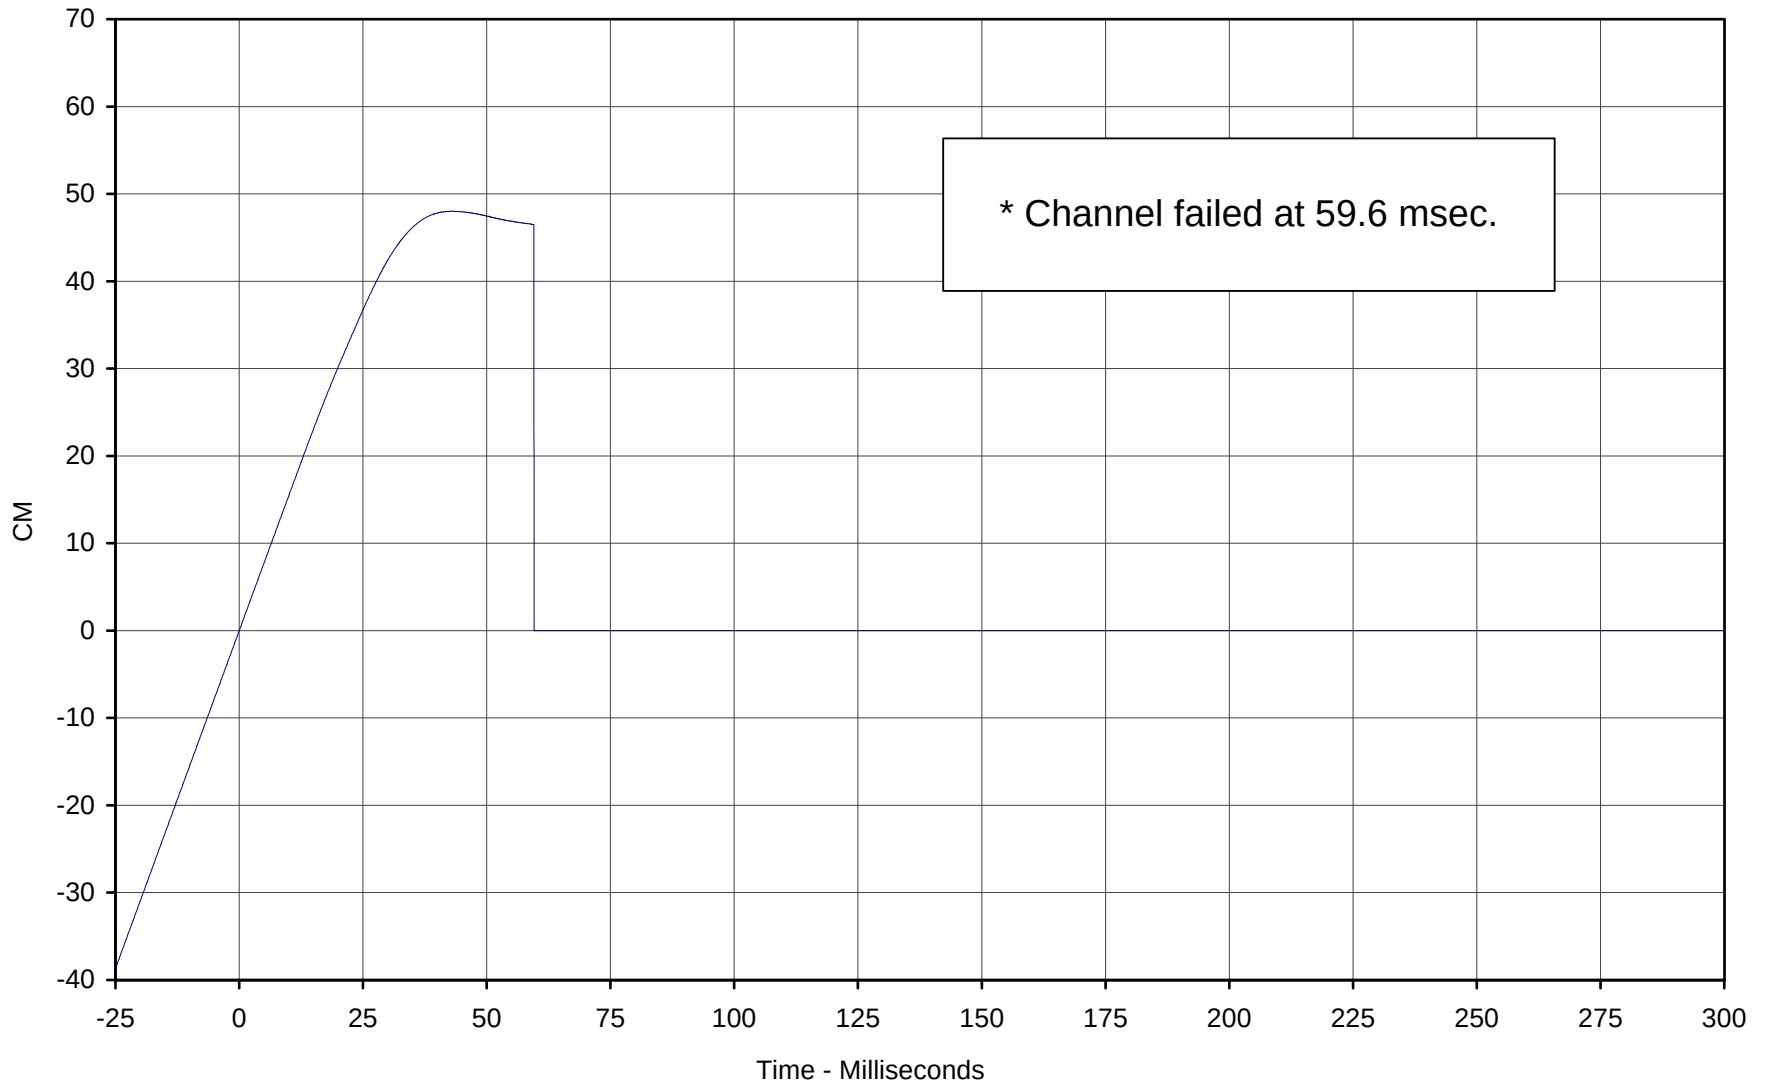

Curve Description: Vehicle Engine Bottom Displacement *

Maximum Value: 48.0 at 43.0 Milliseconds

Minimum Value: 0.0 at 0.0 Milliseconds

SAE Filter Class: 180

Date of Test: 02/13/01

Curve Number: IN2-092

Test Program: 2001 NHTSA 35mph NCAP No.: M10303


Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

* Channel failed at 59.6 msec.



KAR21001-10

B-135

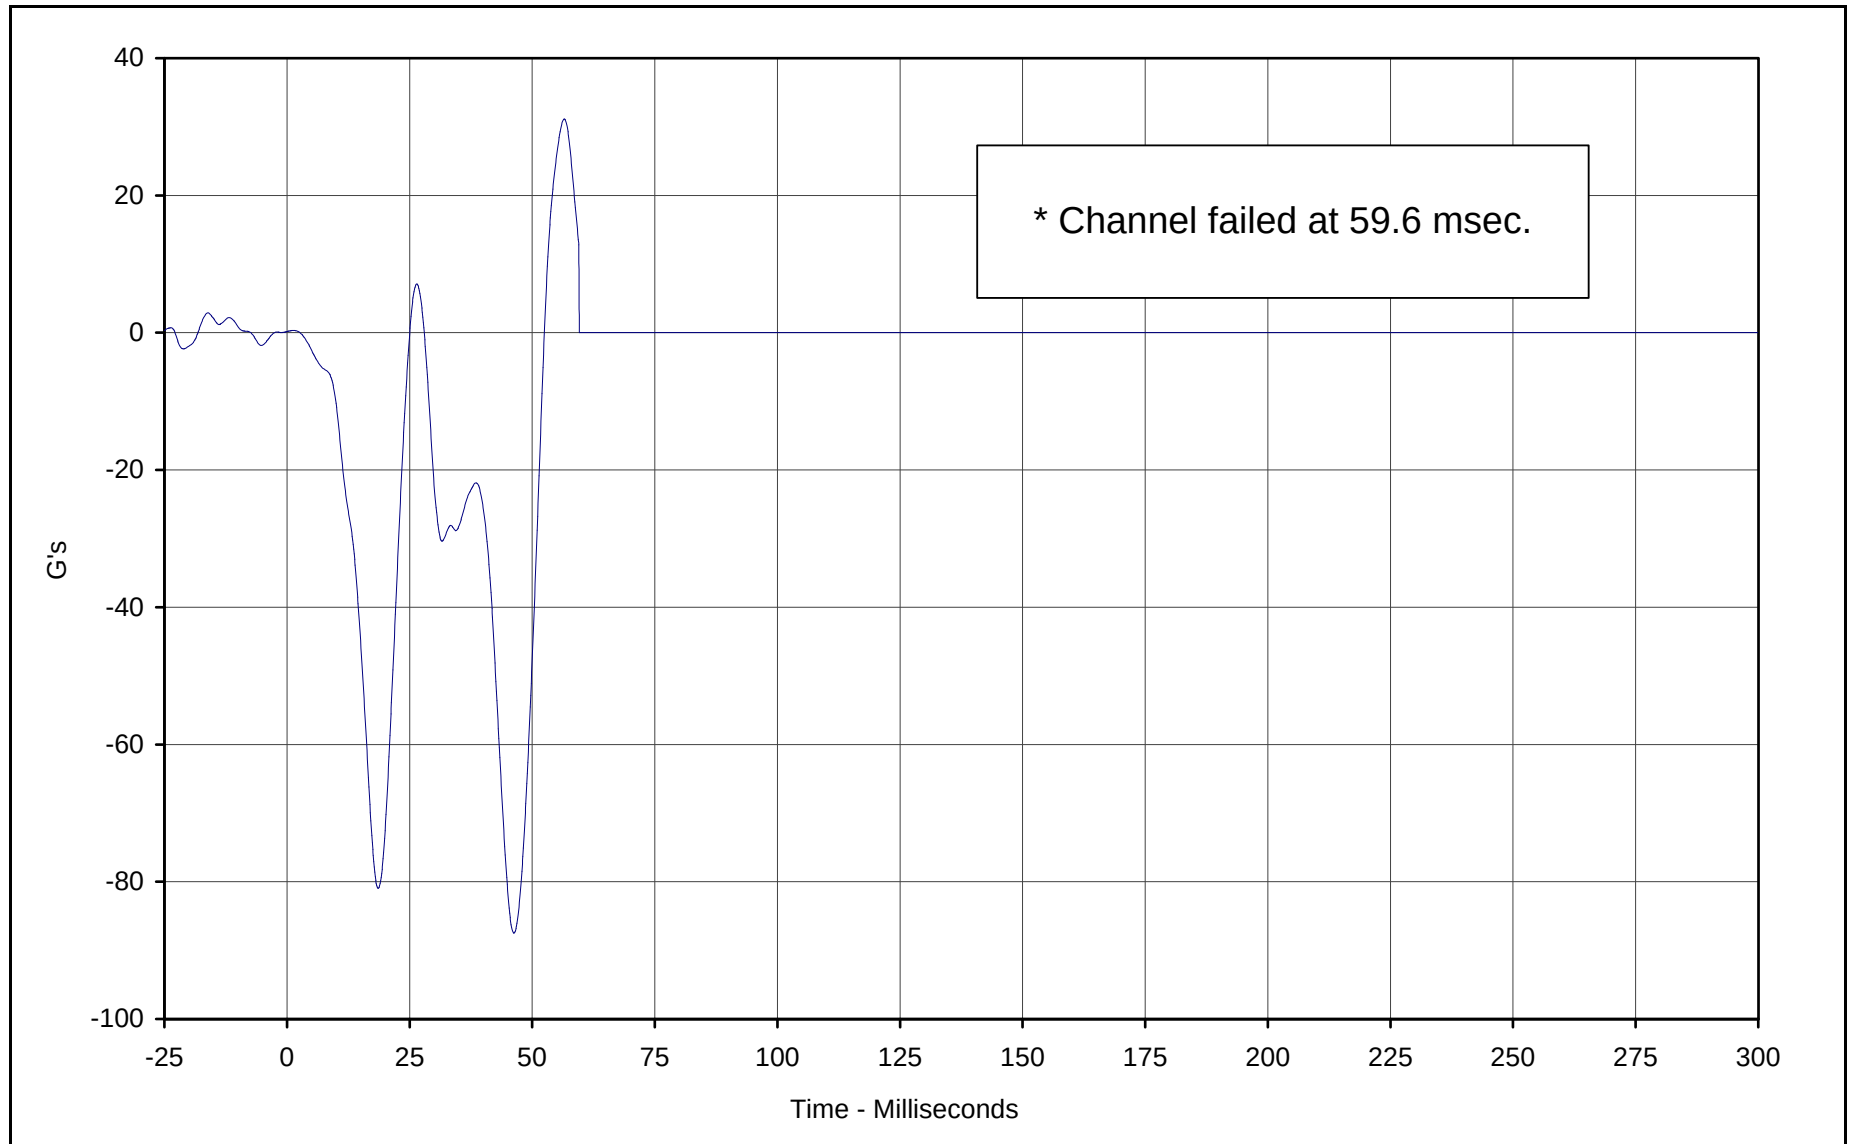

Curve Description: Vehicle Left Brake Caliper *

Maximum Value: 31.1 at 56.5 Milliseconds

Minimum Value: -87.5 at 46.3 Milliseconds

SAE Filter Class: 60

Date of Test: 02/13/01

Curve Number: FIL-093


Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

* Channel failed at 59.6 msec.



KAR21001-10

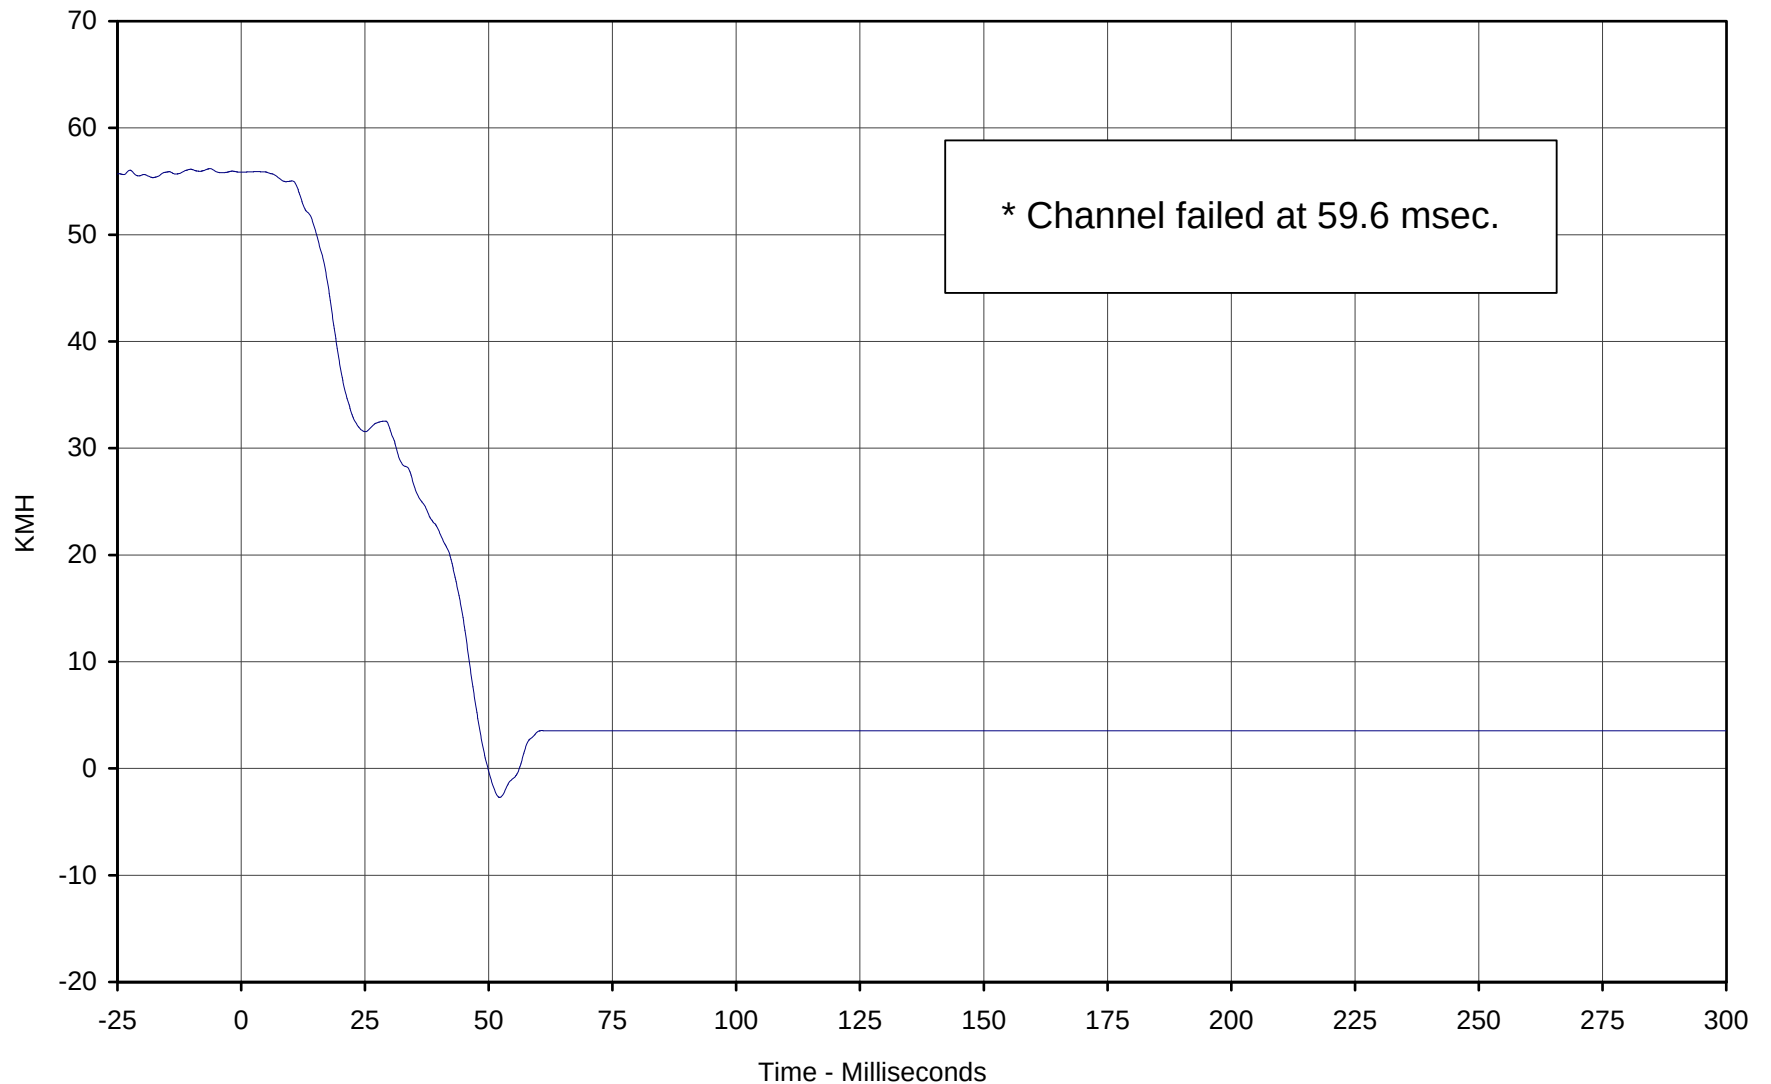

Curve Description: Vehicle Left Brake Caliper Velocity *

Maximum Value: 55.9 at 3.2 Milliseconds

Minimum Value: -2.7 at 52.2 Milliseconds

SAE Filter Class: 180

Date of Test: 02/13/01


Curve Number: IN1-093

Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

* Channel failed ta 59.6 msec.



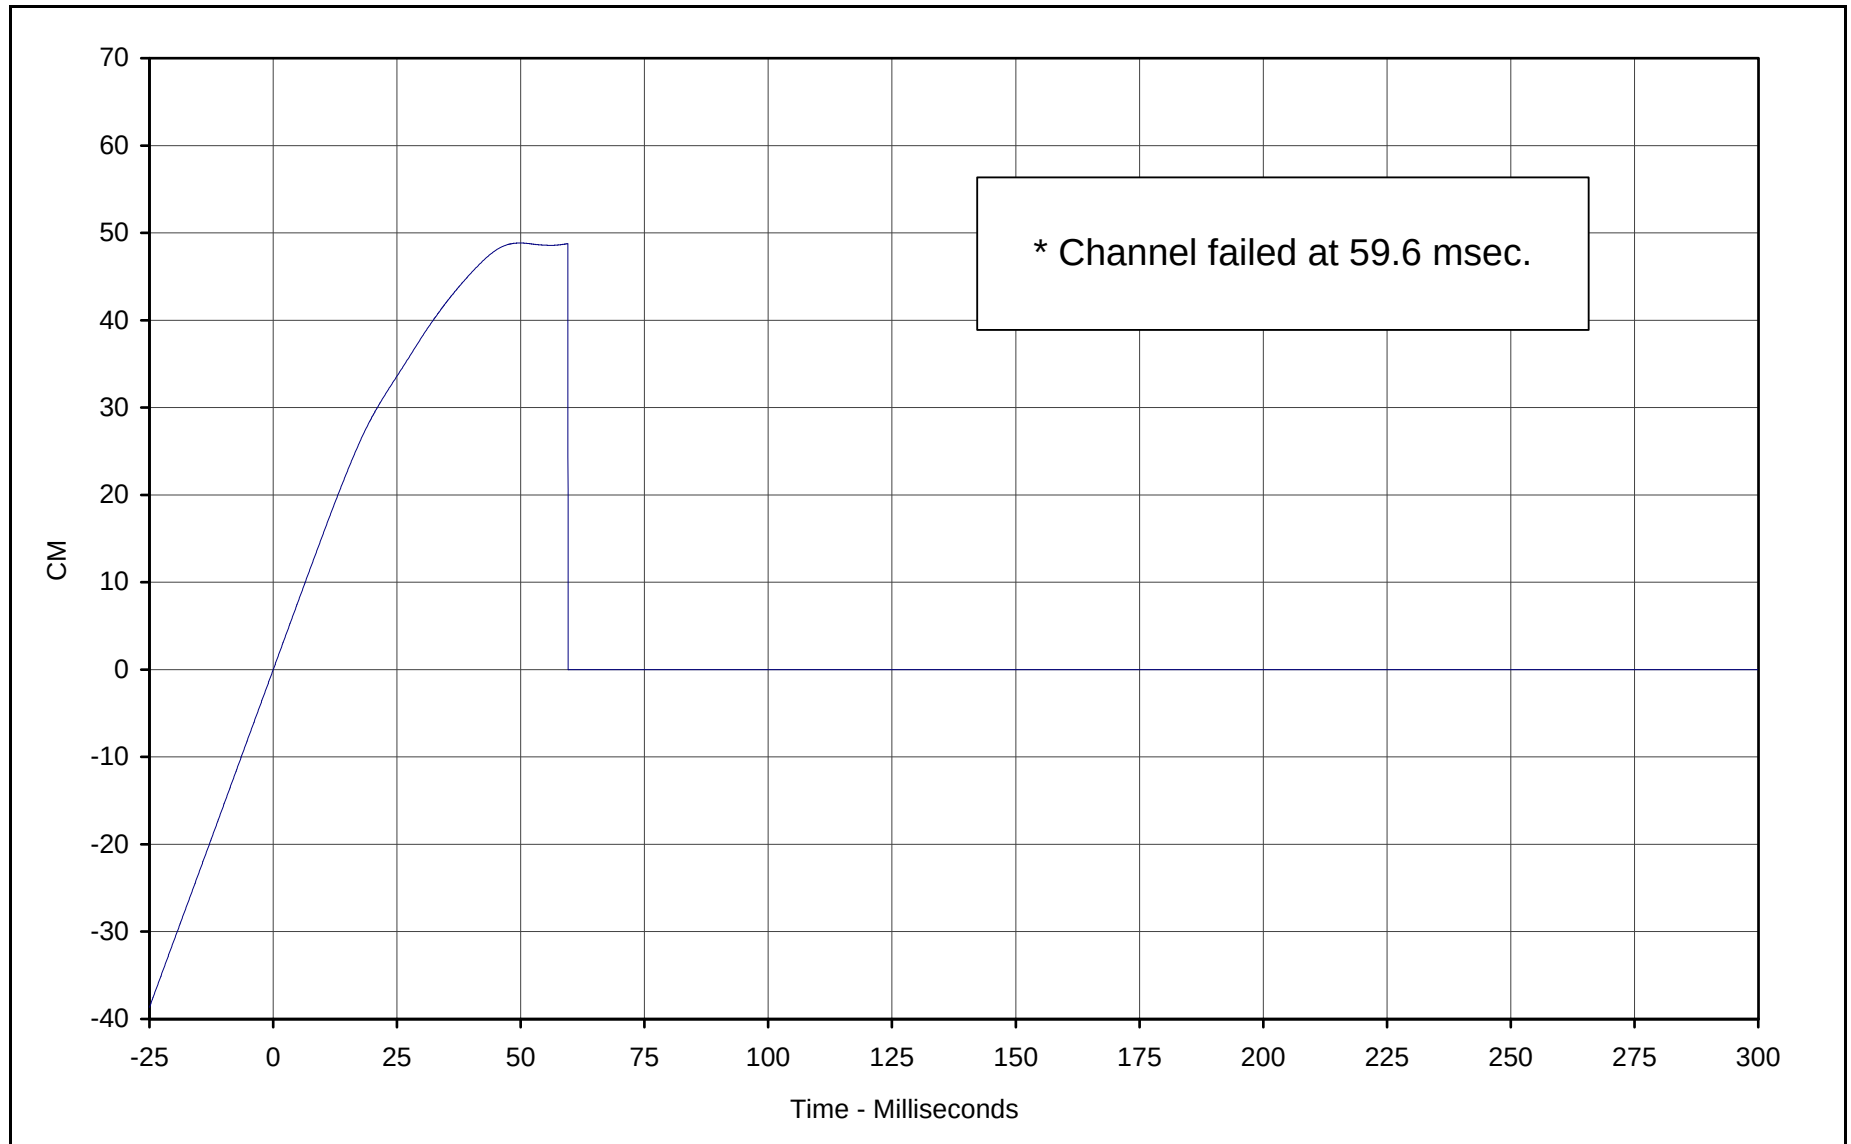

Curve Description: Vehicle Left Brake Caliper Displ. *

Maximum Value: 48.8 at 49.8 Milliseconds

Minimum Value: 0.0 at 0.0 Milliseconds

SAE Filter Class: 180

Date of Test: 02/13/01


Curve Number: IN2-093

Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

* Channel failed at 59.6 msec.



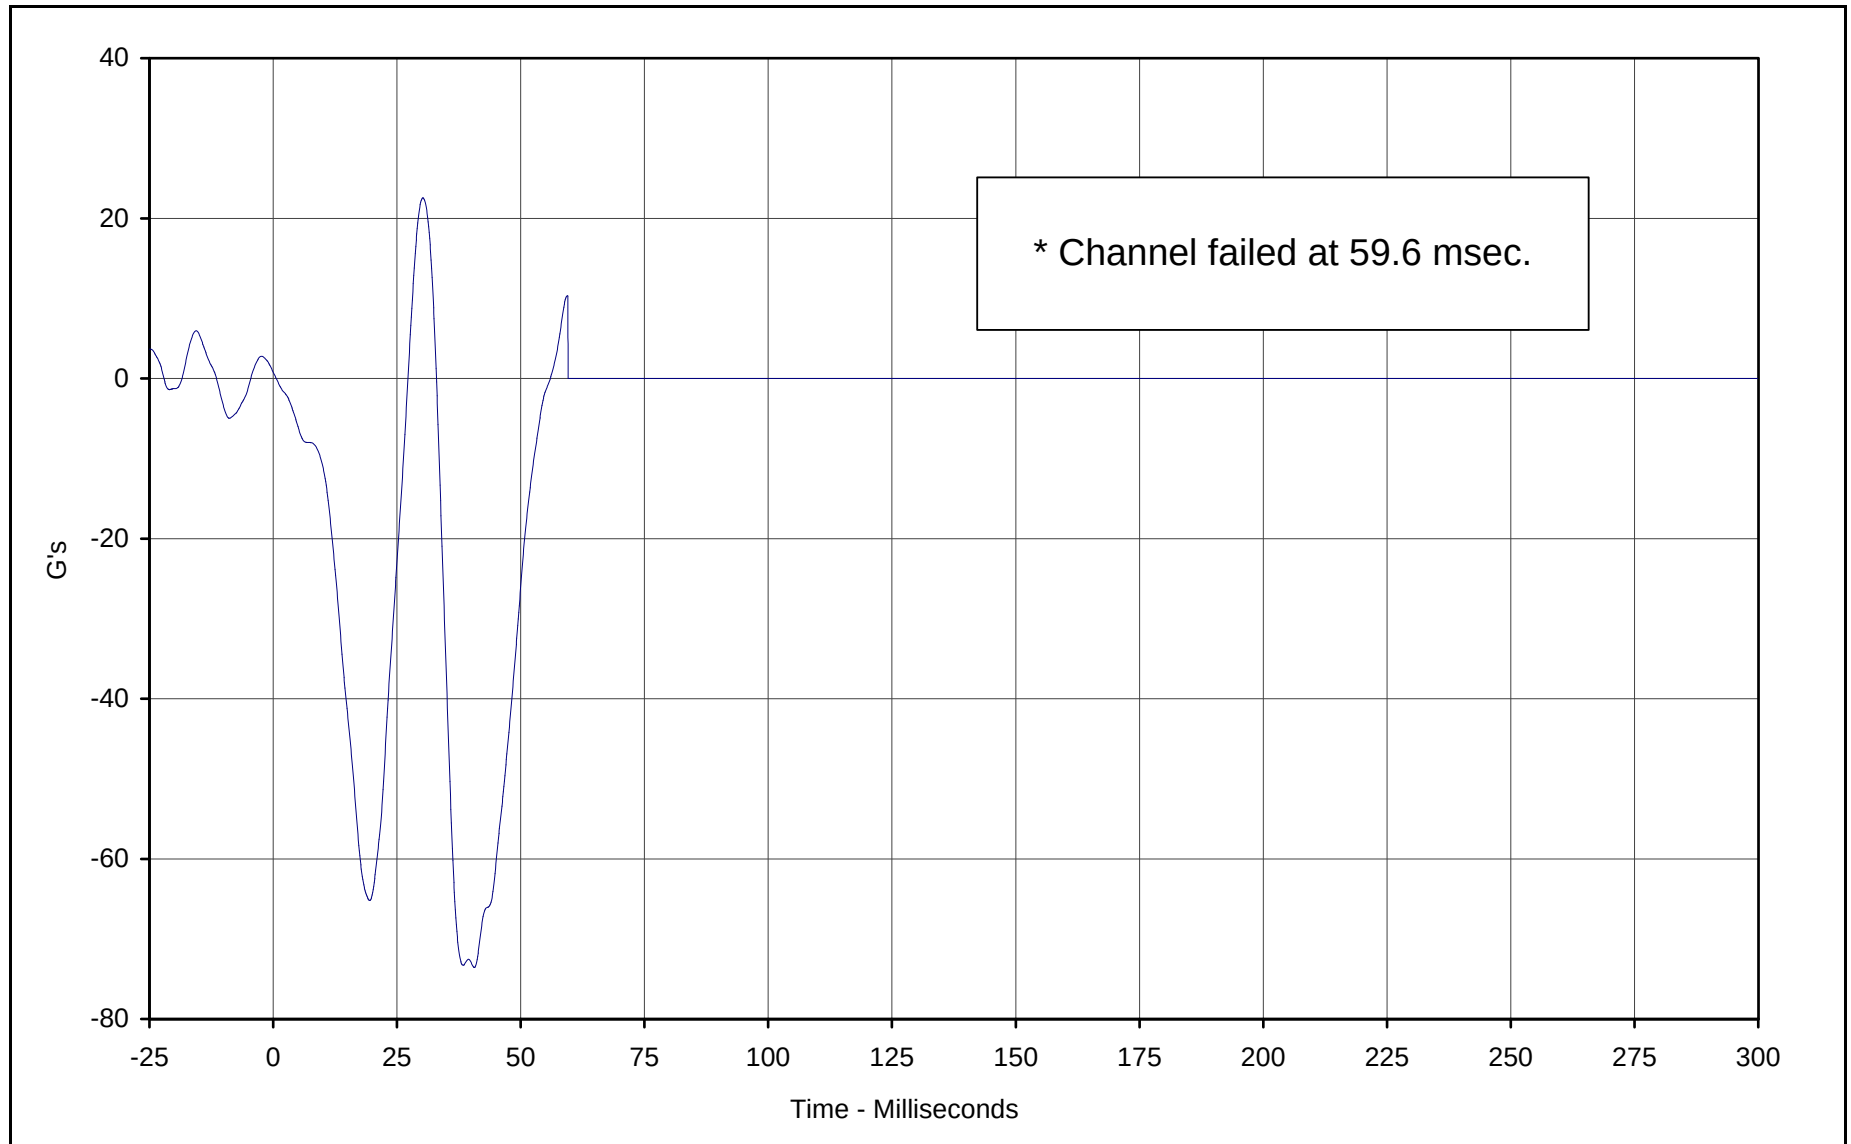

Curve Description: Vehicle Right Brake Caliper *

Maximum Value: 22.6 at 30.2 Milliseconds

Minimum Value: -73.6 at 40.6 Milliseconds

SAE Filter Class: 60

Date of Test: 02/13/01

Curve Number: FIL-094


Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

* Channel failed at 59.6 msec.



B-139

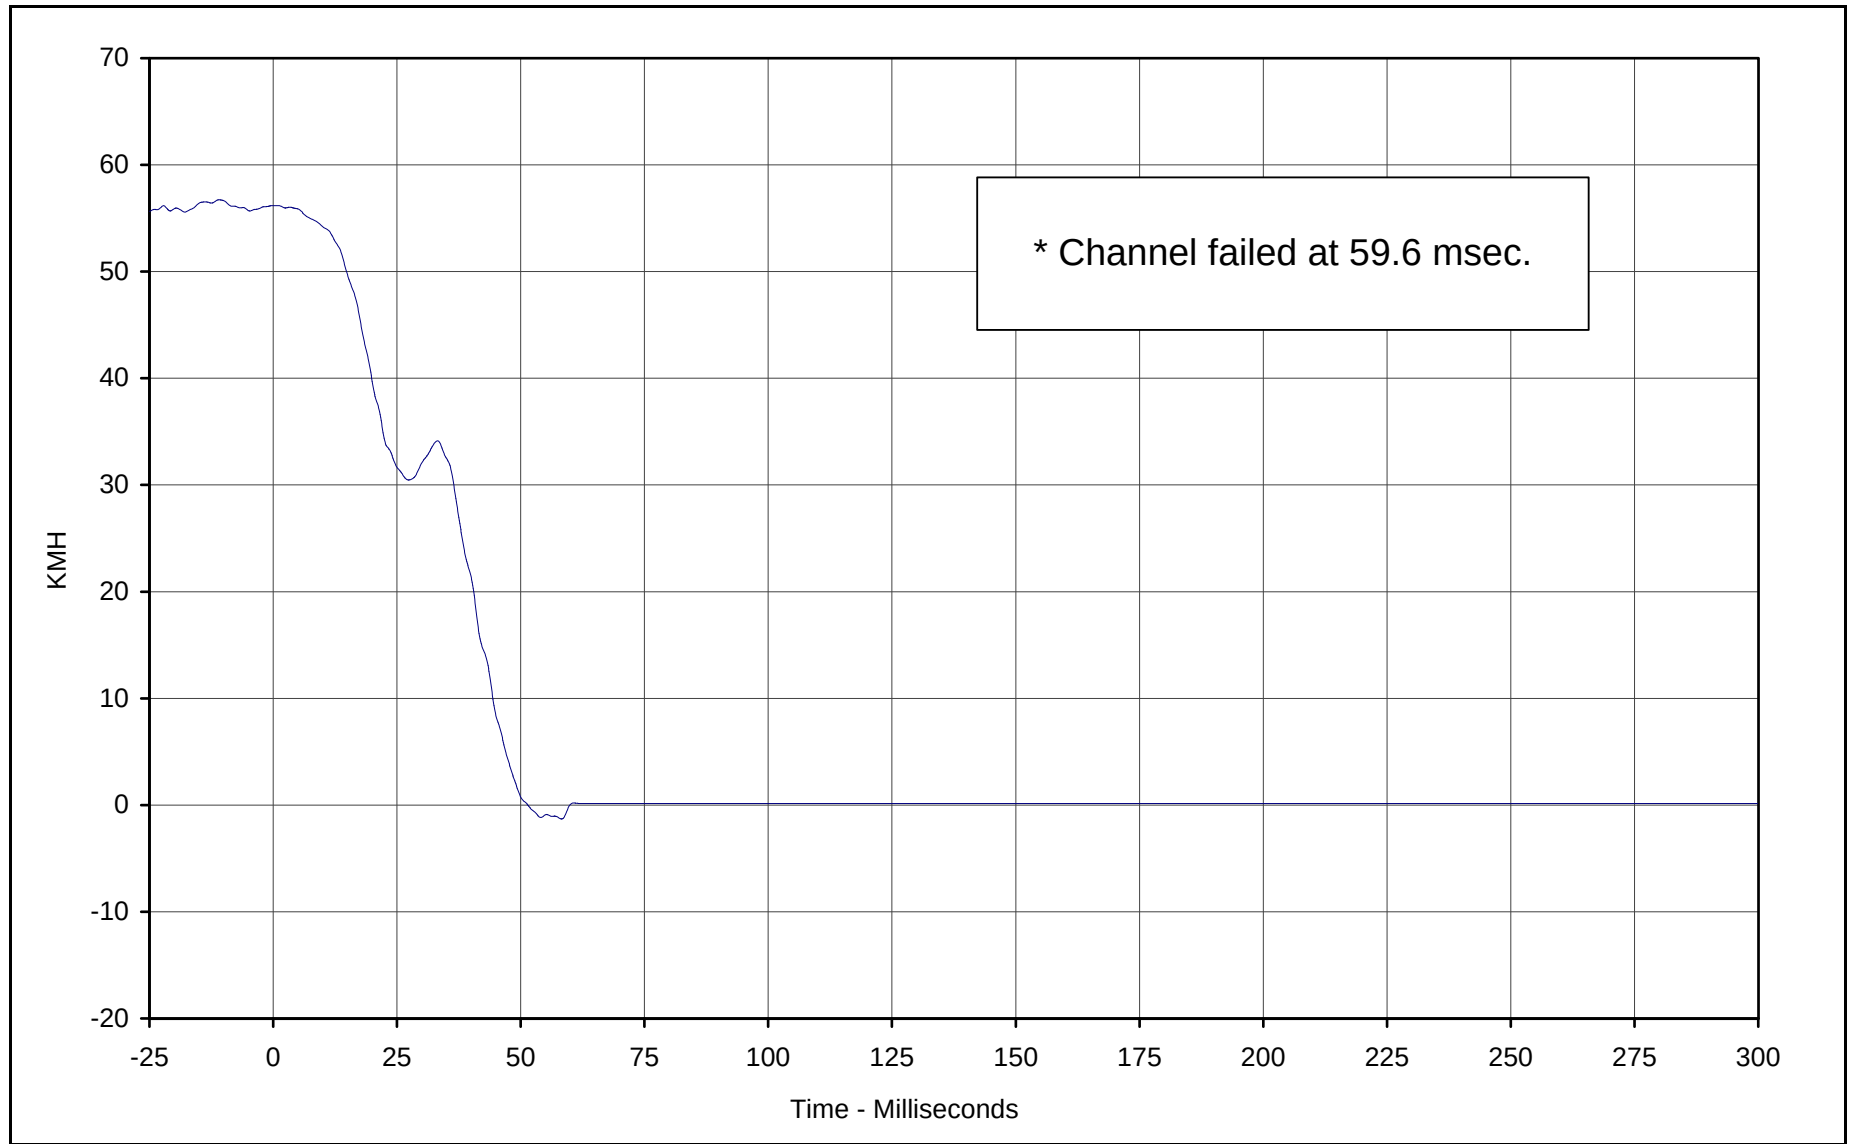

Curve Description: Vehicle Right Brake Caliper Velocity *

Maximum Value: 56.2 at 1.0 Milliseconds

Minimum Value: -1.3 at 58.3 Milliseconds

SAE Filter Class: 180

Date of Test: 02/13/01

Curve Number: IN1-094

Test Program: 2001 NHTSA 35mph NCAP No.: M10303


Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

* Channel failed ta 59.6 msec.



KAR21001-10

B-140

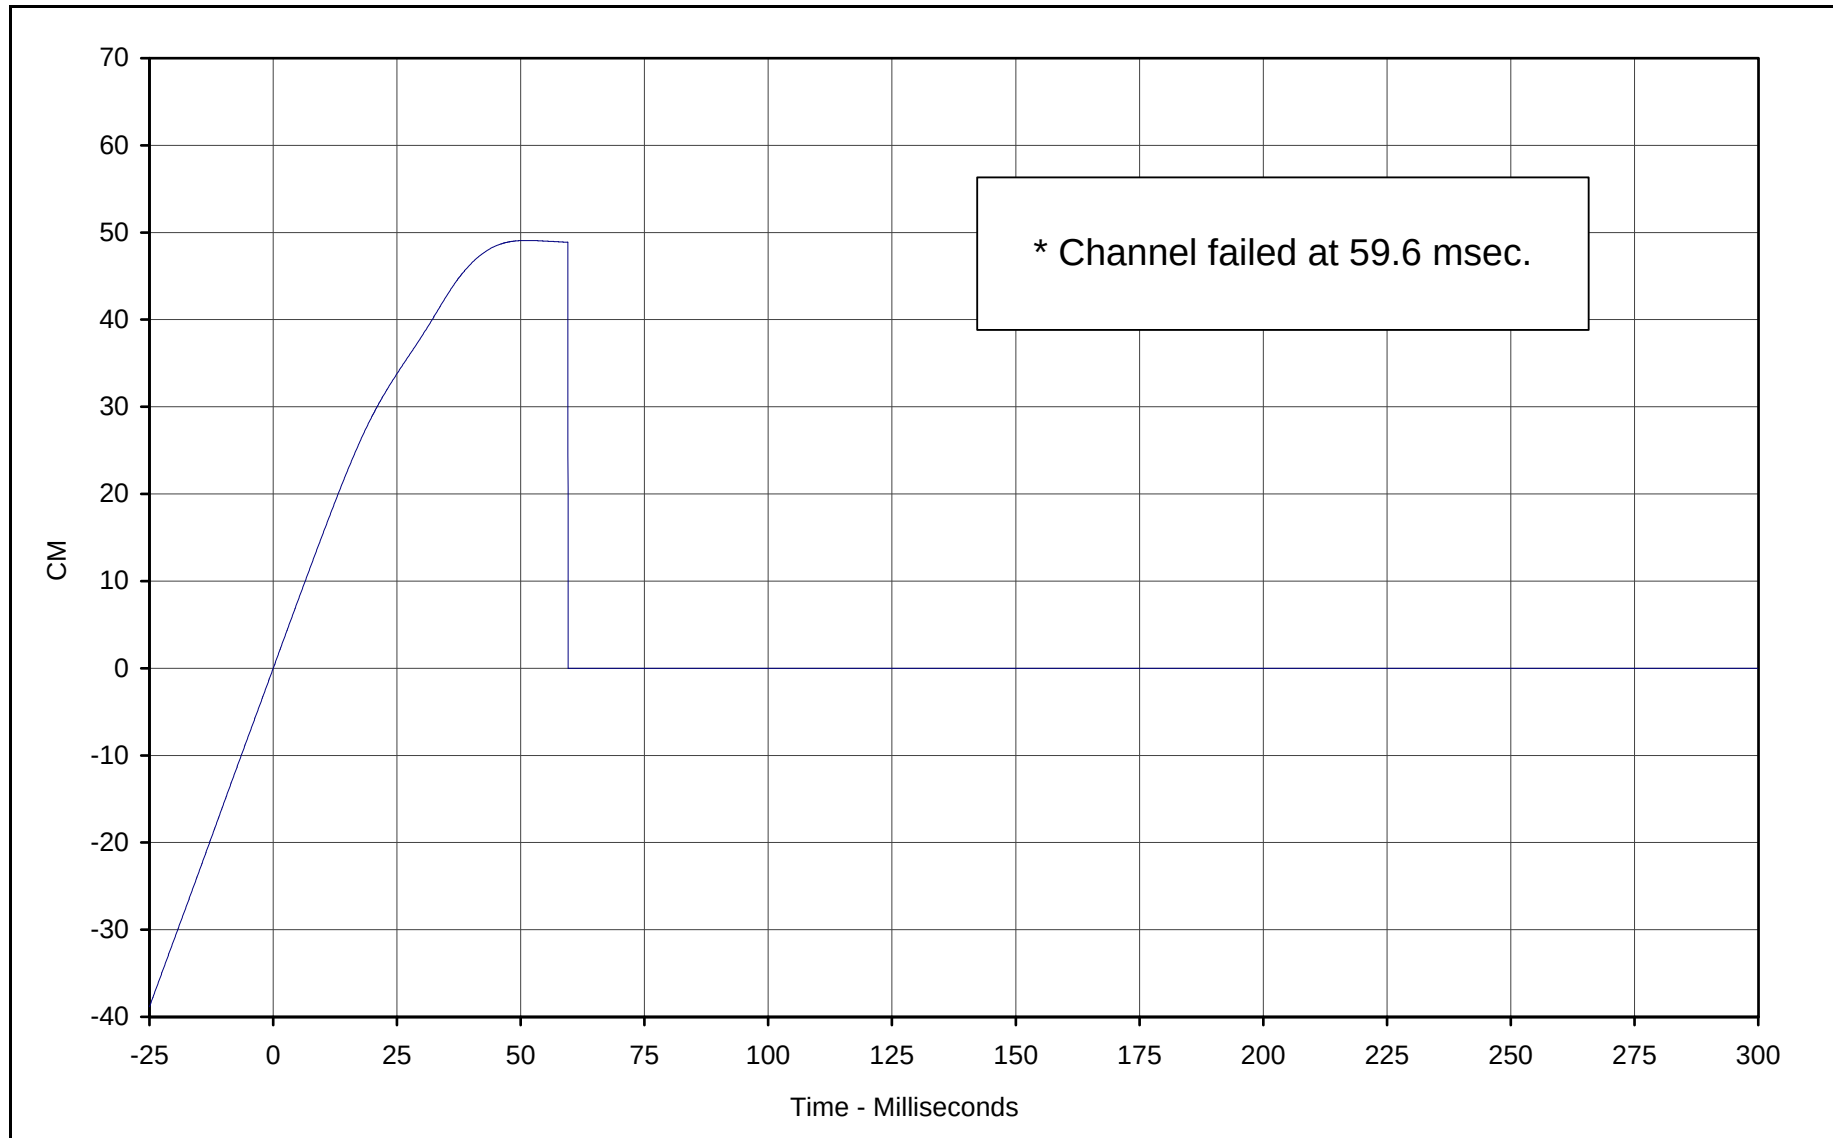

Curve Description: Vehicle Right Brake Caliper Displ. *
Maximum Value: 49.1 at 51.4 Milliseconds
Minimum Value: 0.0 at 0.0 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: IN2-094


Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

* Channel failed at 59.6 msec.



KAR21001-10

B-141

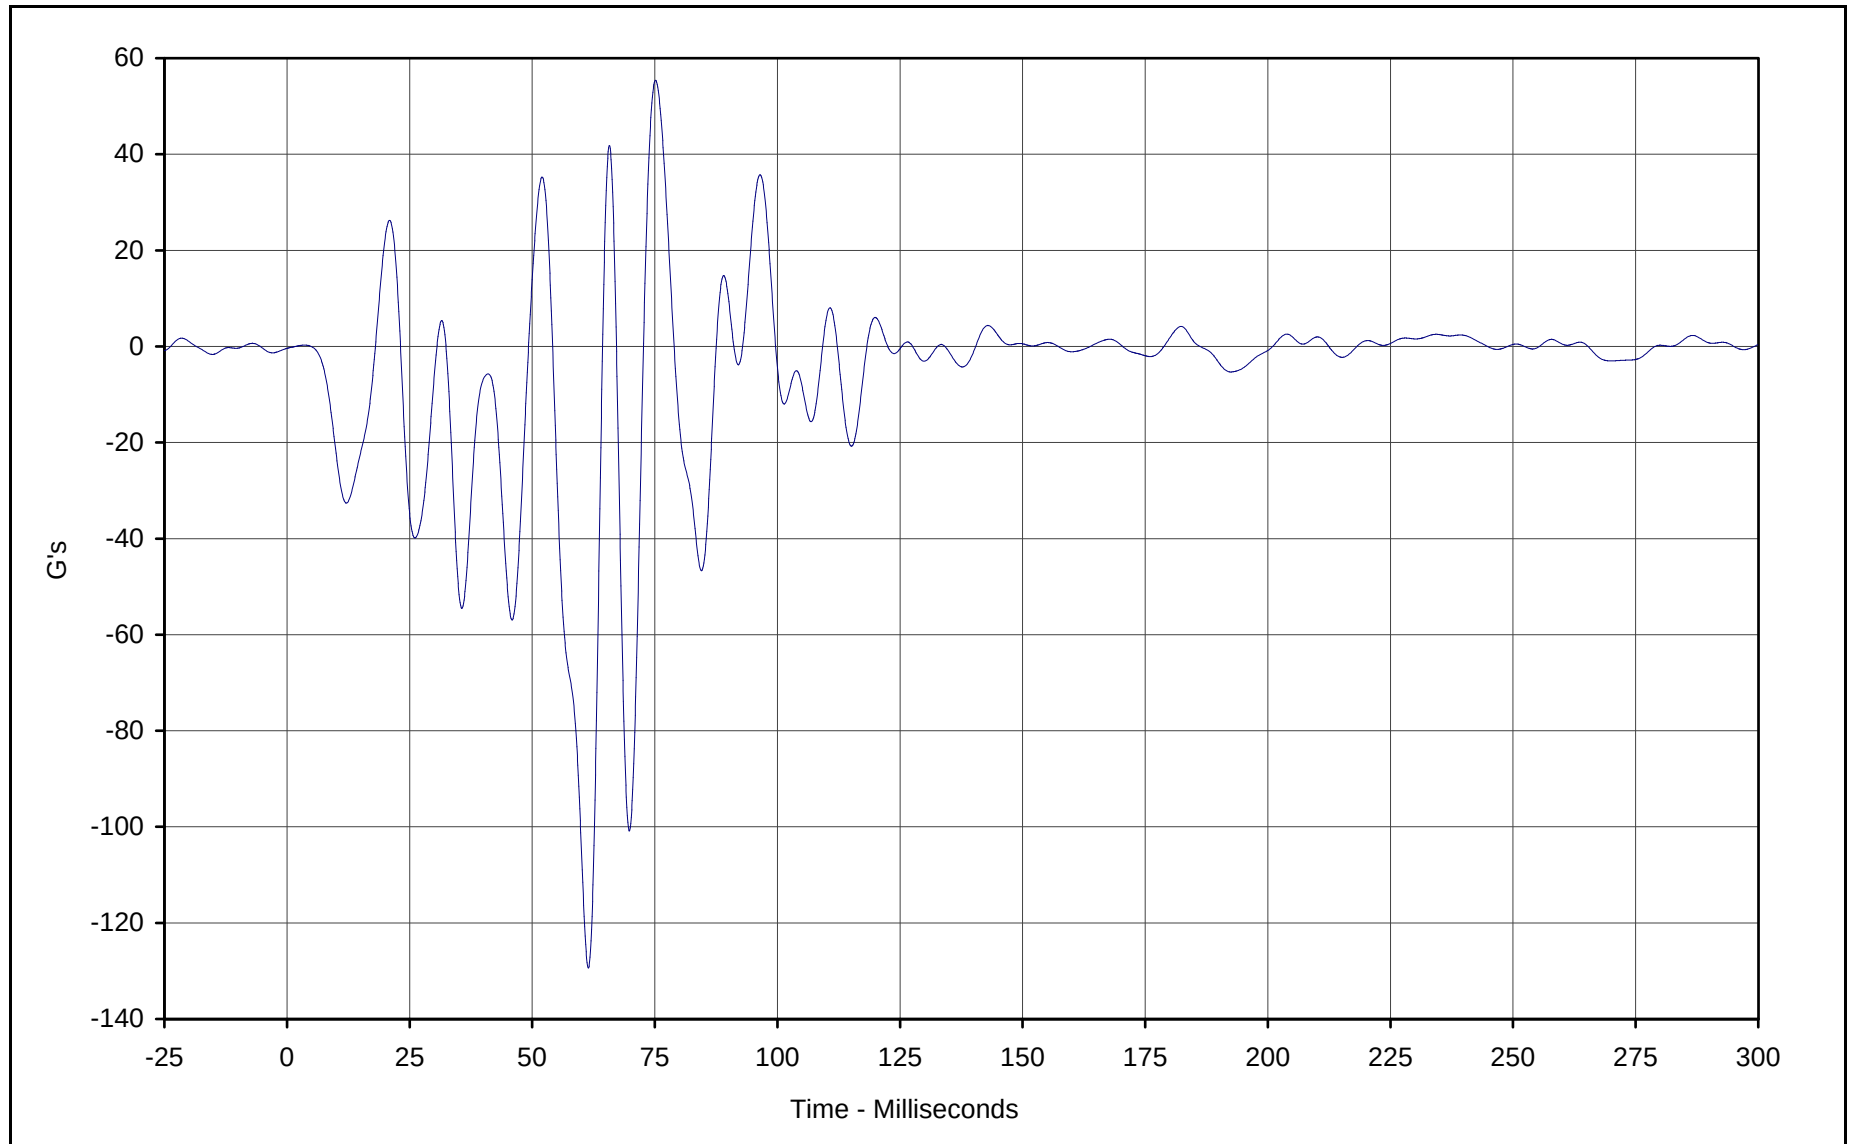


Curve Description: Vehicle Instrument Panel
Maximum Value: 55.4 at 75.2 Milliseconds
Minimum Value: -129.3 at 61.5 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-095

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-142

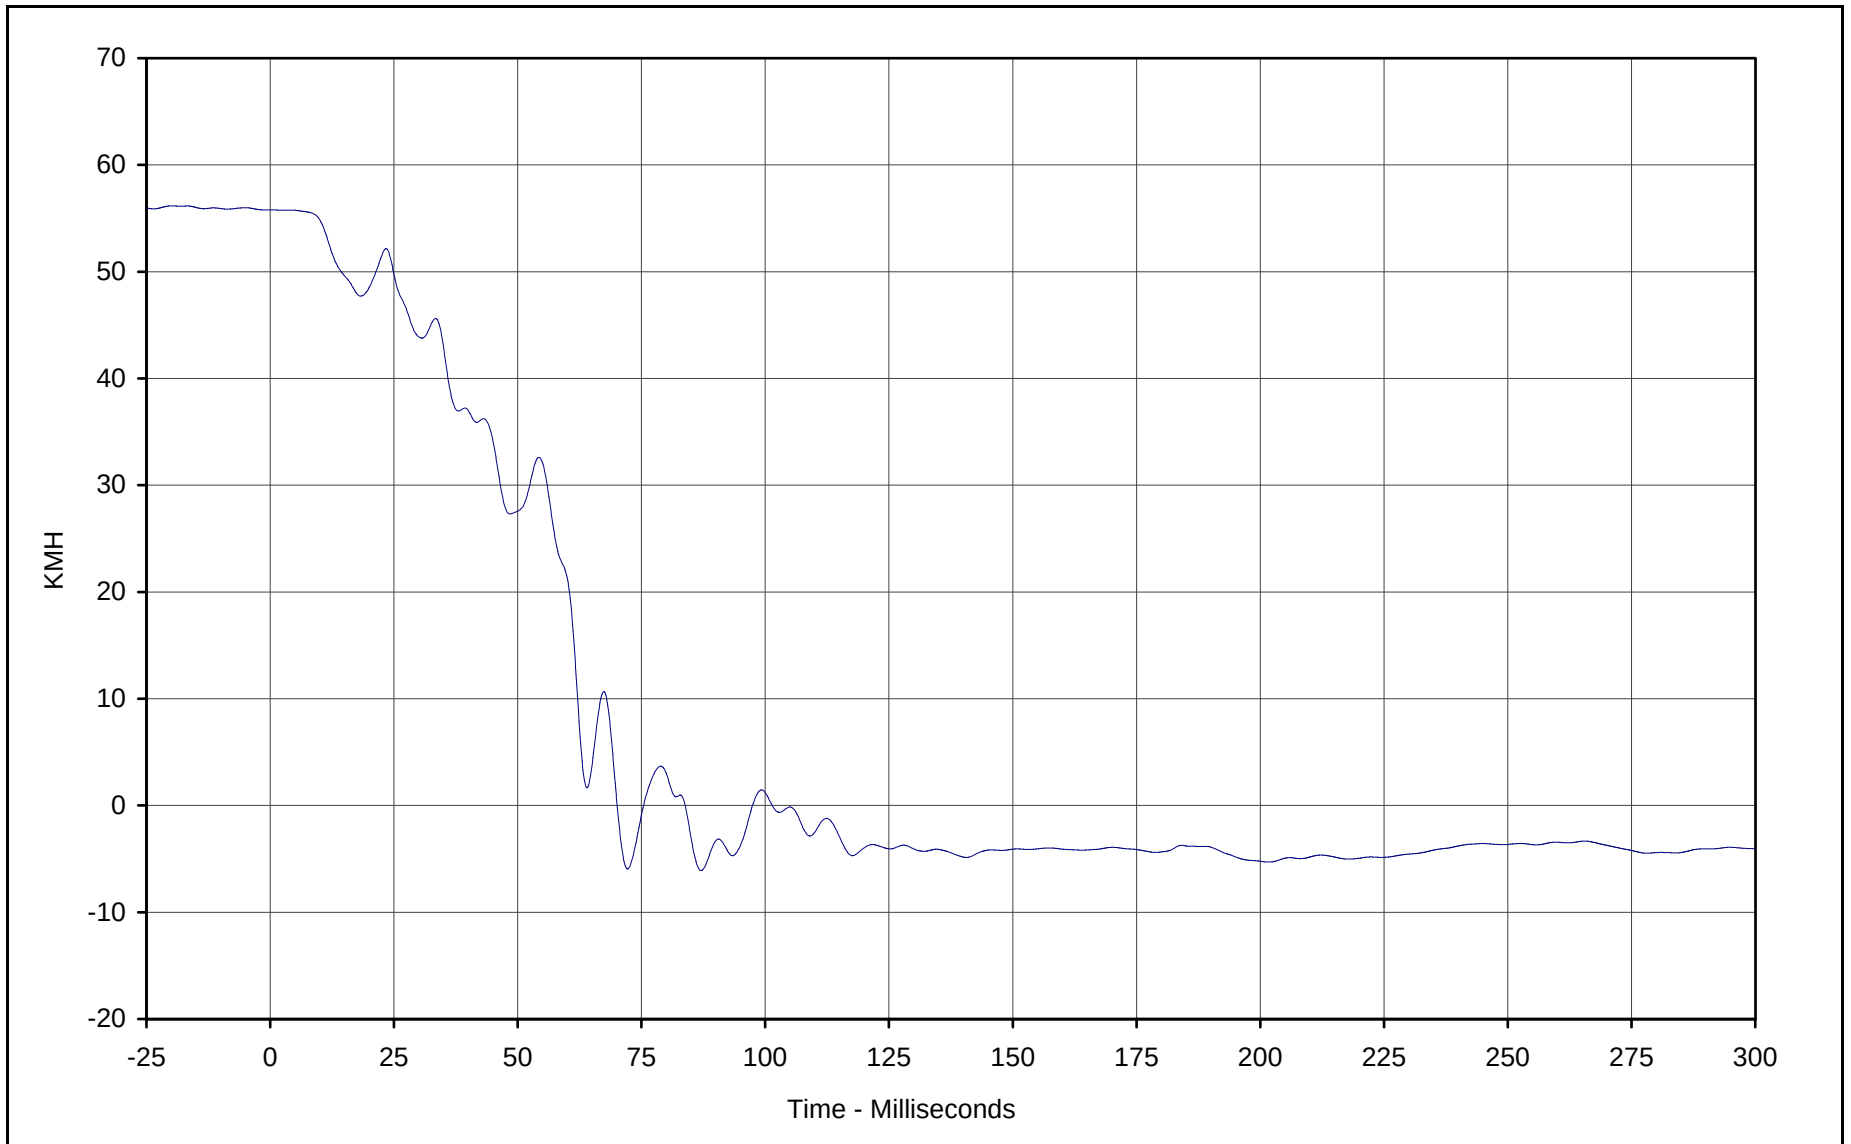


Curve Description: Vehicle Instrument Panel Velocity
Maximum Value: 55.8 at 0.1 Milliseconds
Minimum Value: -6.1 at 87.0 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: IN1-095

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-143

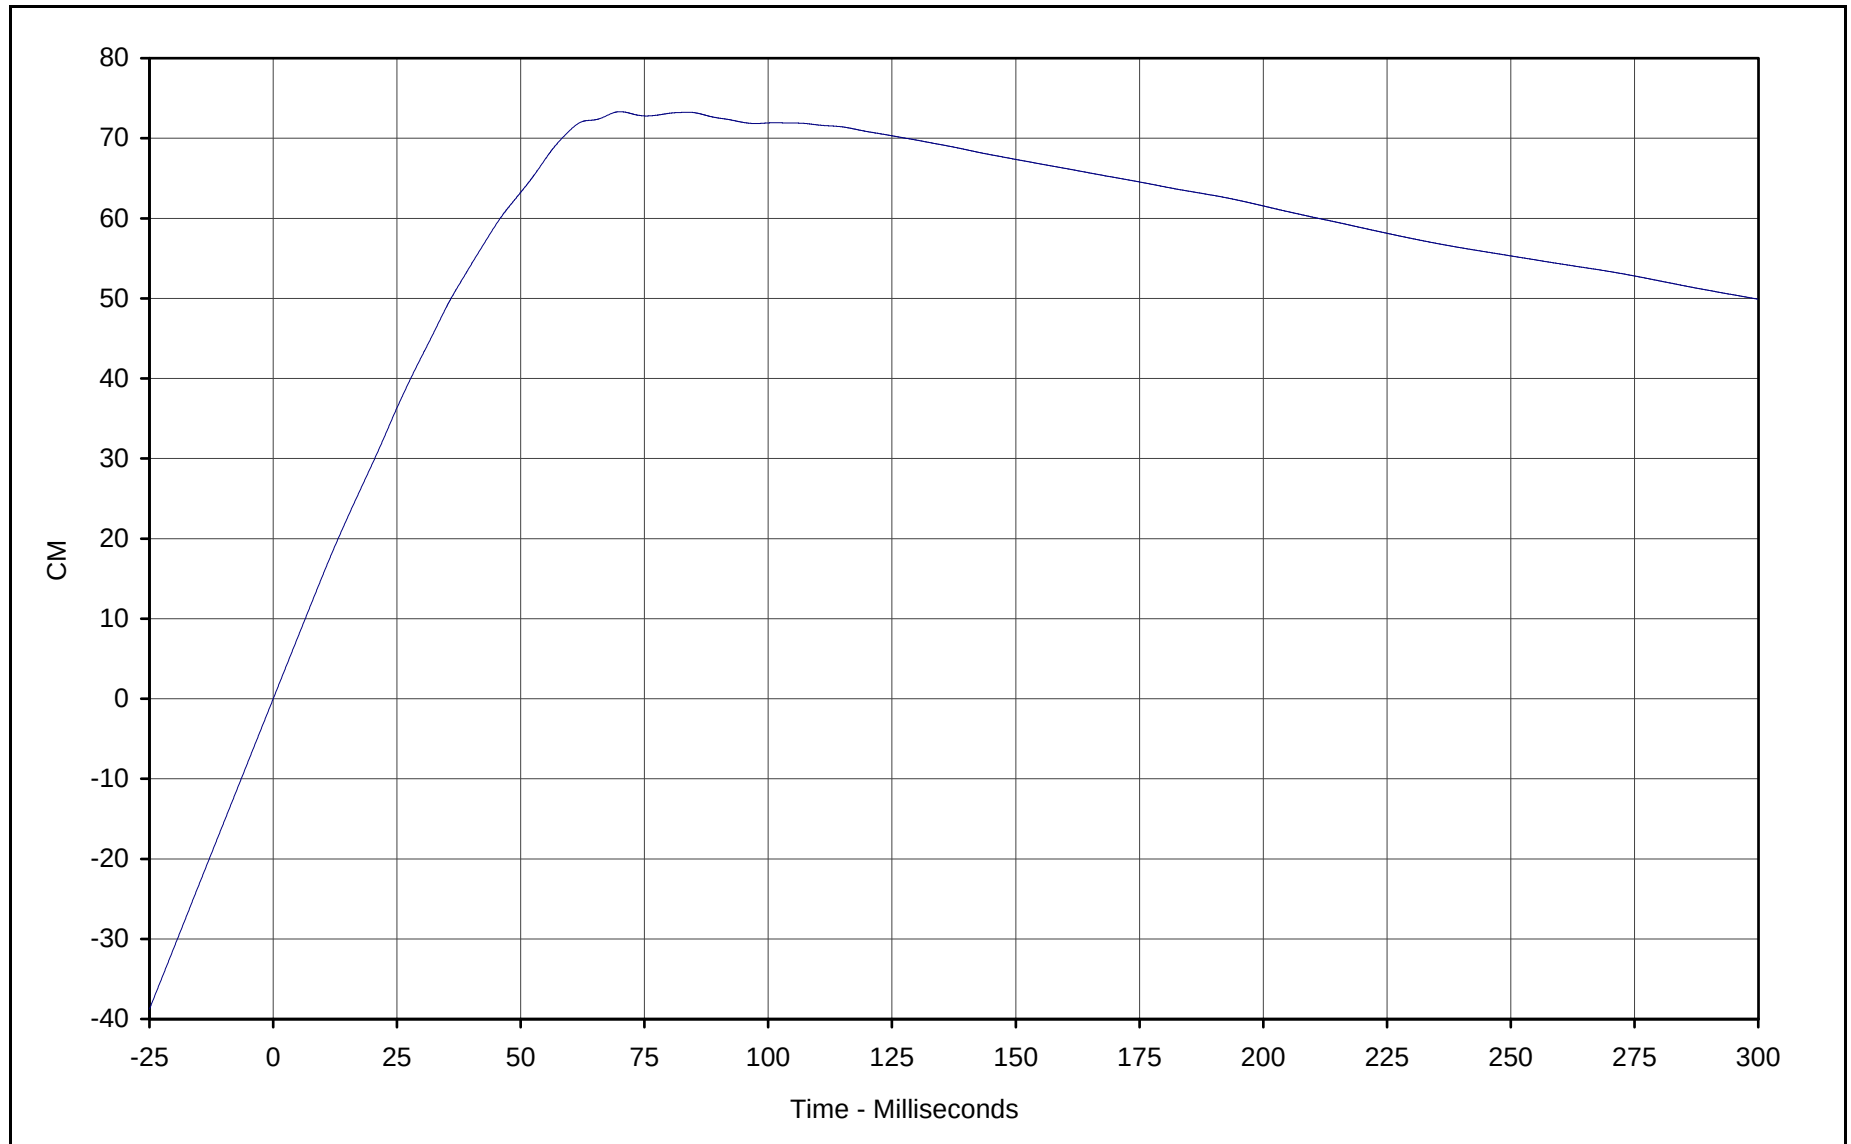

Curve Description: Vehicle Instrument Panel Displacement

Maximum Value: 73.3 at 70.1 Milliseconds

Minimum Value: 0.0 at 0.0 Milliseconds

SAE Filter Class: 180

Date of Test: 02/13/01

Curve Number: IN2-095


Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-144

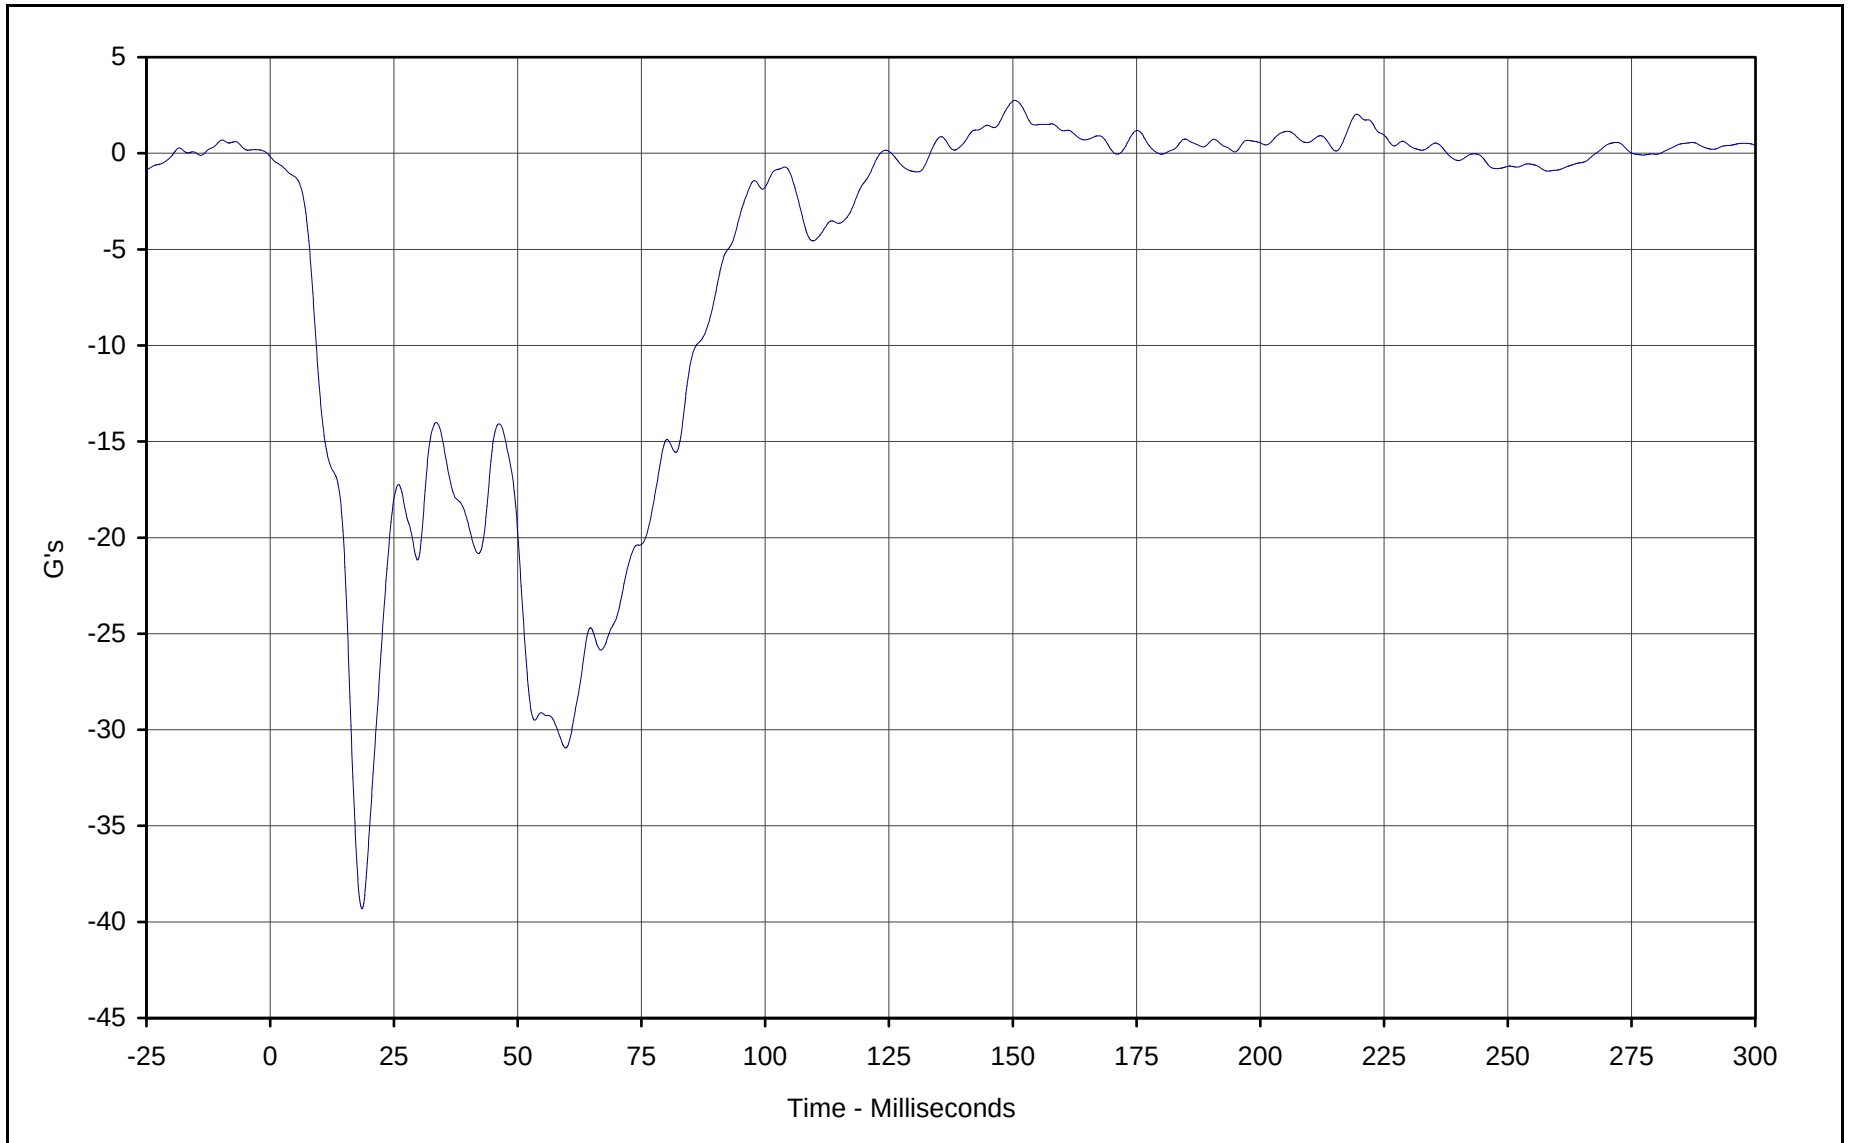


Curve Description: Vehicle Left Rear Redundant
Maximum Value: 2.8 at 150.4 Milliseconds
Minimum Value: -39.3 at 18.5 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-096

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

B-145

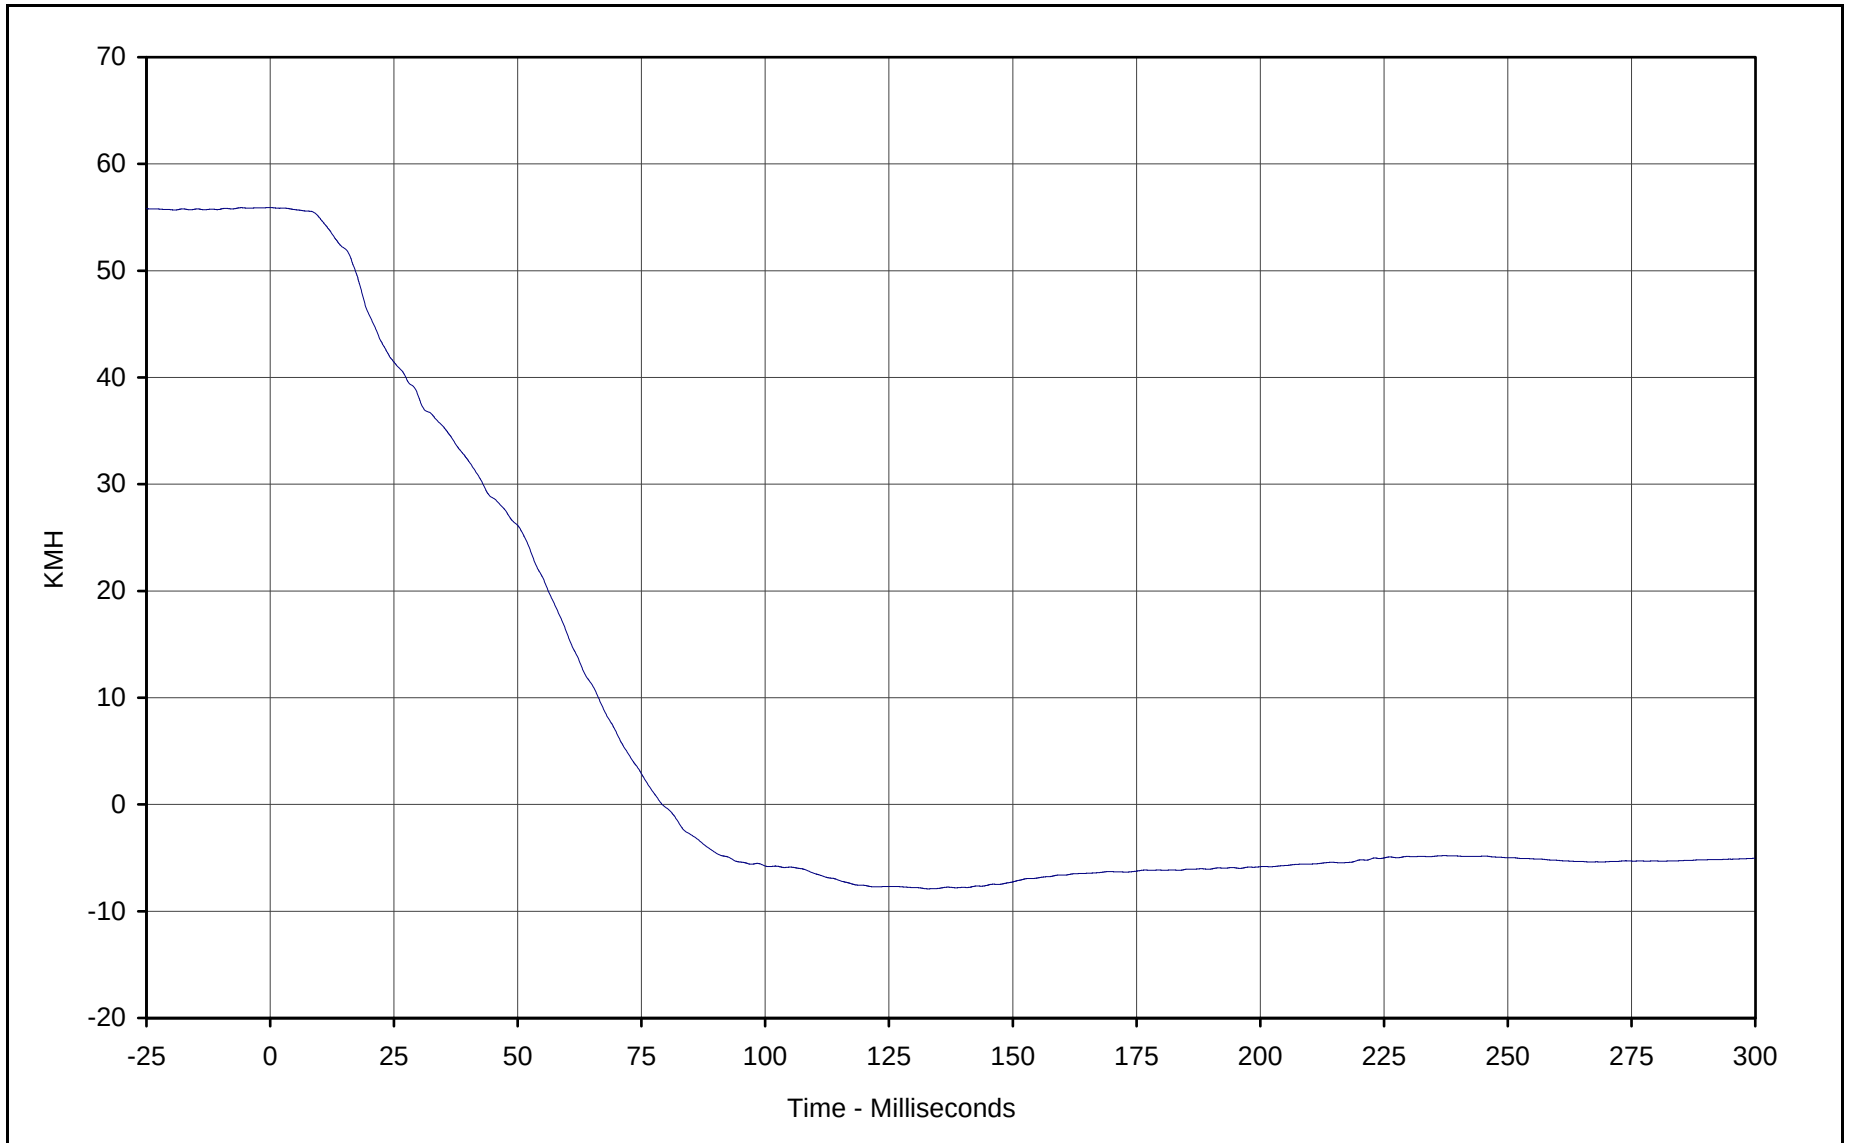

Curve Description: Vehicle Left Rear Redundant Velocity

Maximum Value: 55.9 at 0.0 Milliseconds

Minimum Value: -7.9 at 132.9 Milliseconds

SAE Filter Class: 180

Date of Test: 02/13/01


Curve Number: IN1-096

Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

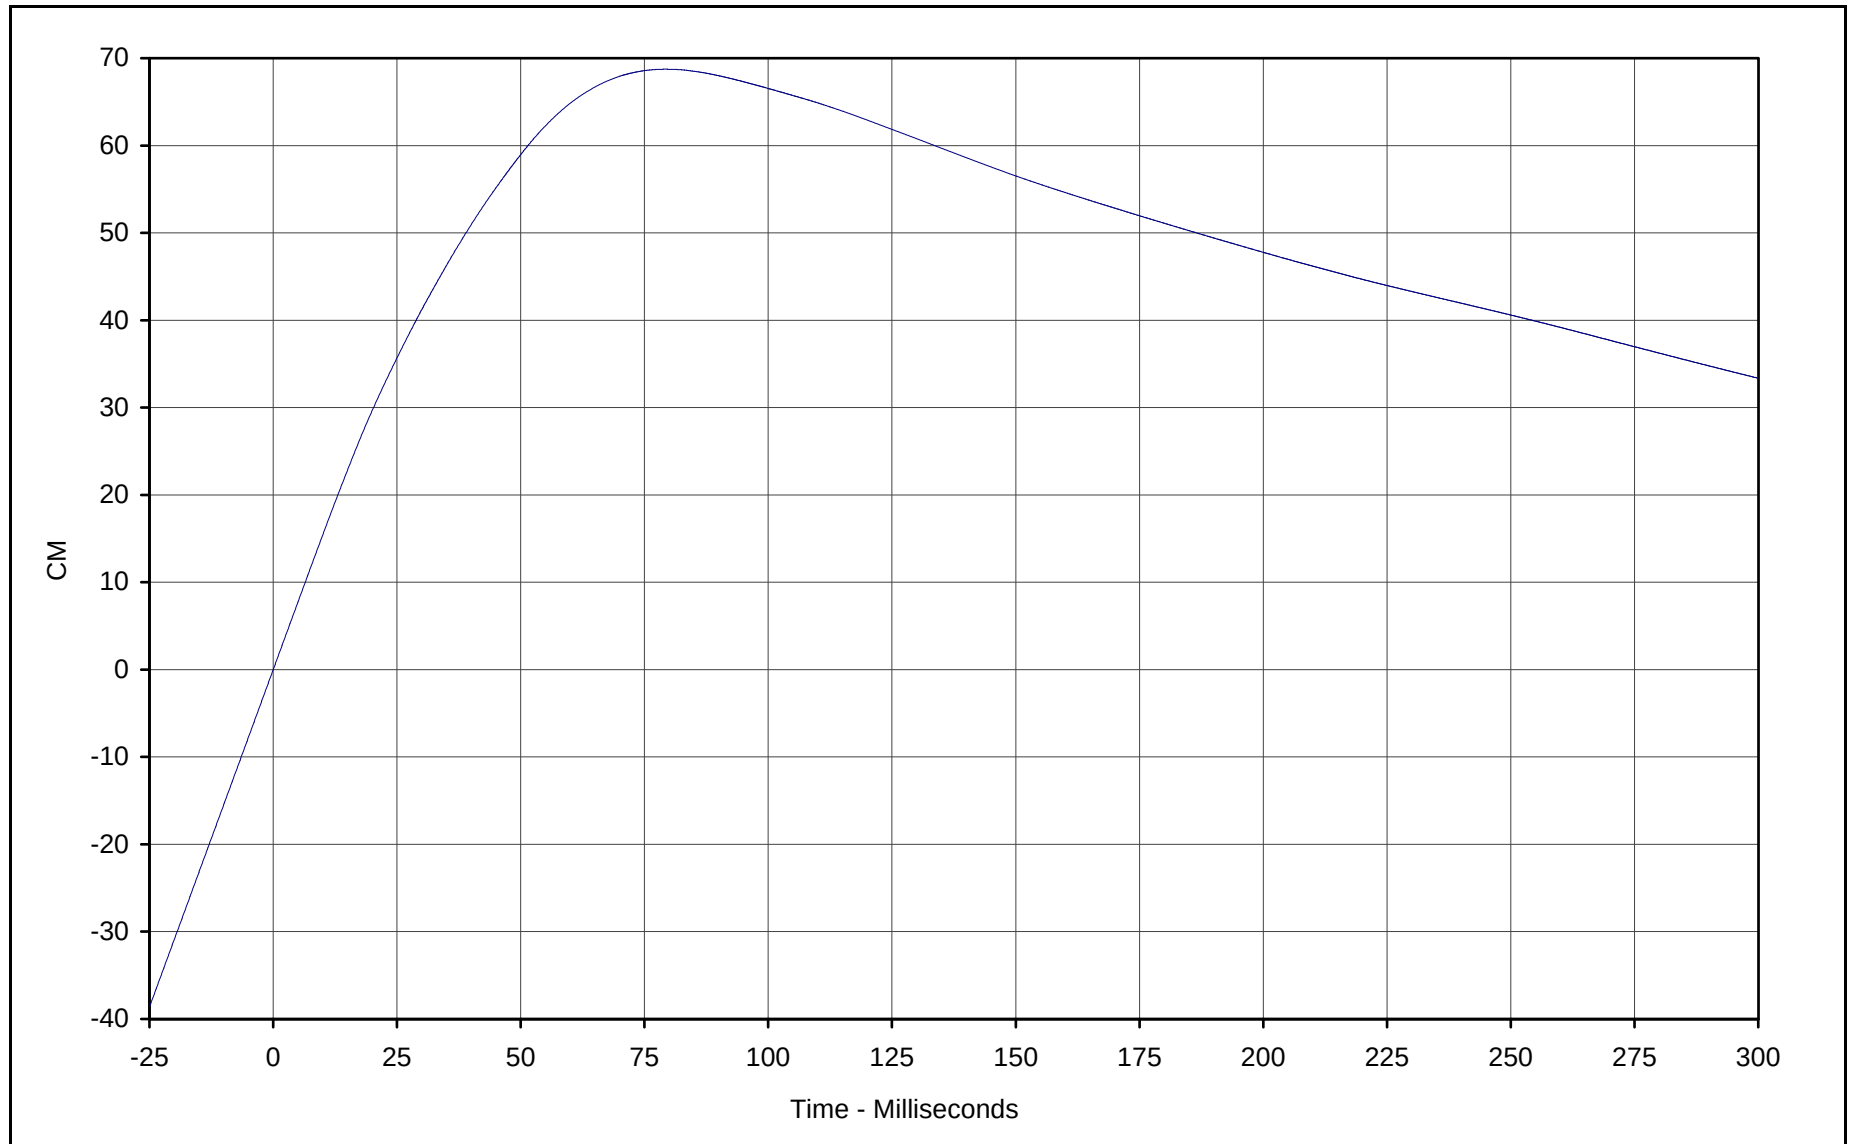


Curve Description: Vehicle Left Rear Redundant Displ.
Maximum Value: 68.7 at 79.2 Milliseconds
Minimum Value: 0.0 at 0.0 Milliseconds
SAE Filter Class: 180
Date of Test: 02/13/01
Curve Number: IN2-096

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



APPENDIX C
LOAD CELL BARRIER INFORMATION

C-1

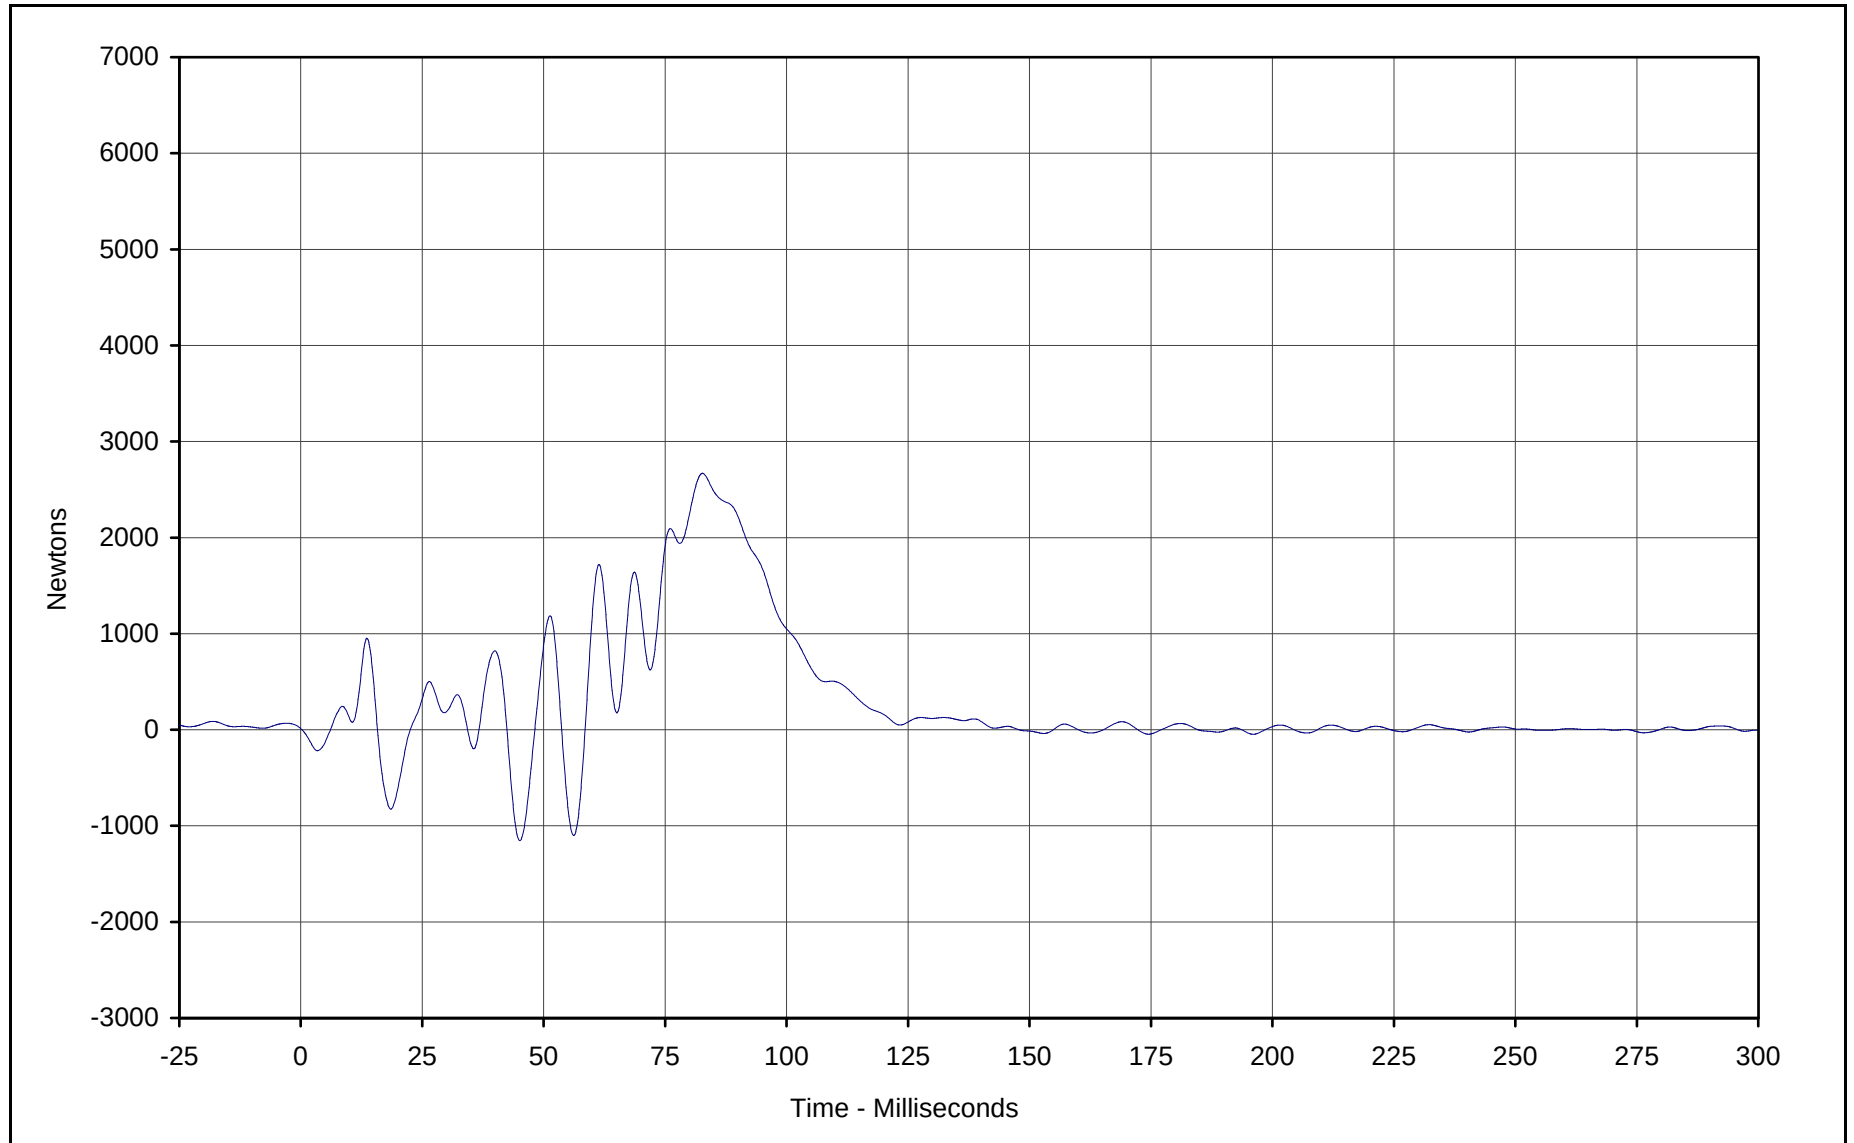


Curve Description: Barrier Force A2
Maximum Value: 2669.0 at 82.7 Milliseconds
Minimum Value: -1153.5 at 45.1 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-099

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-2

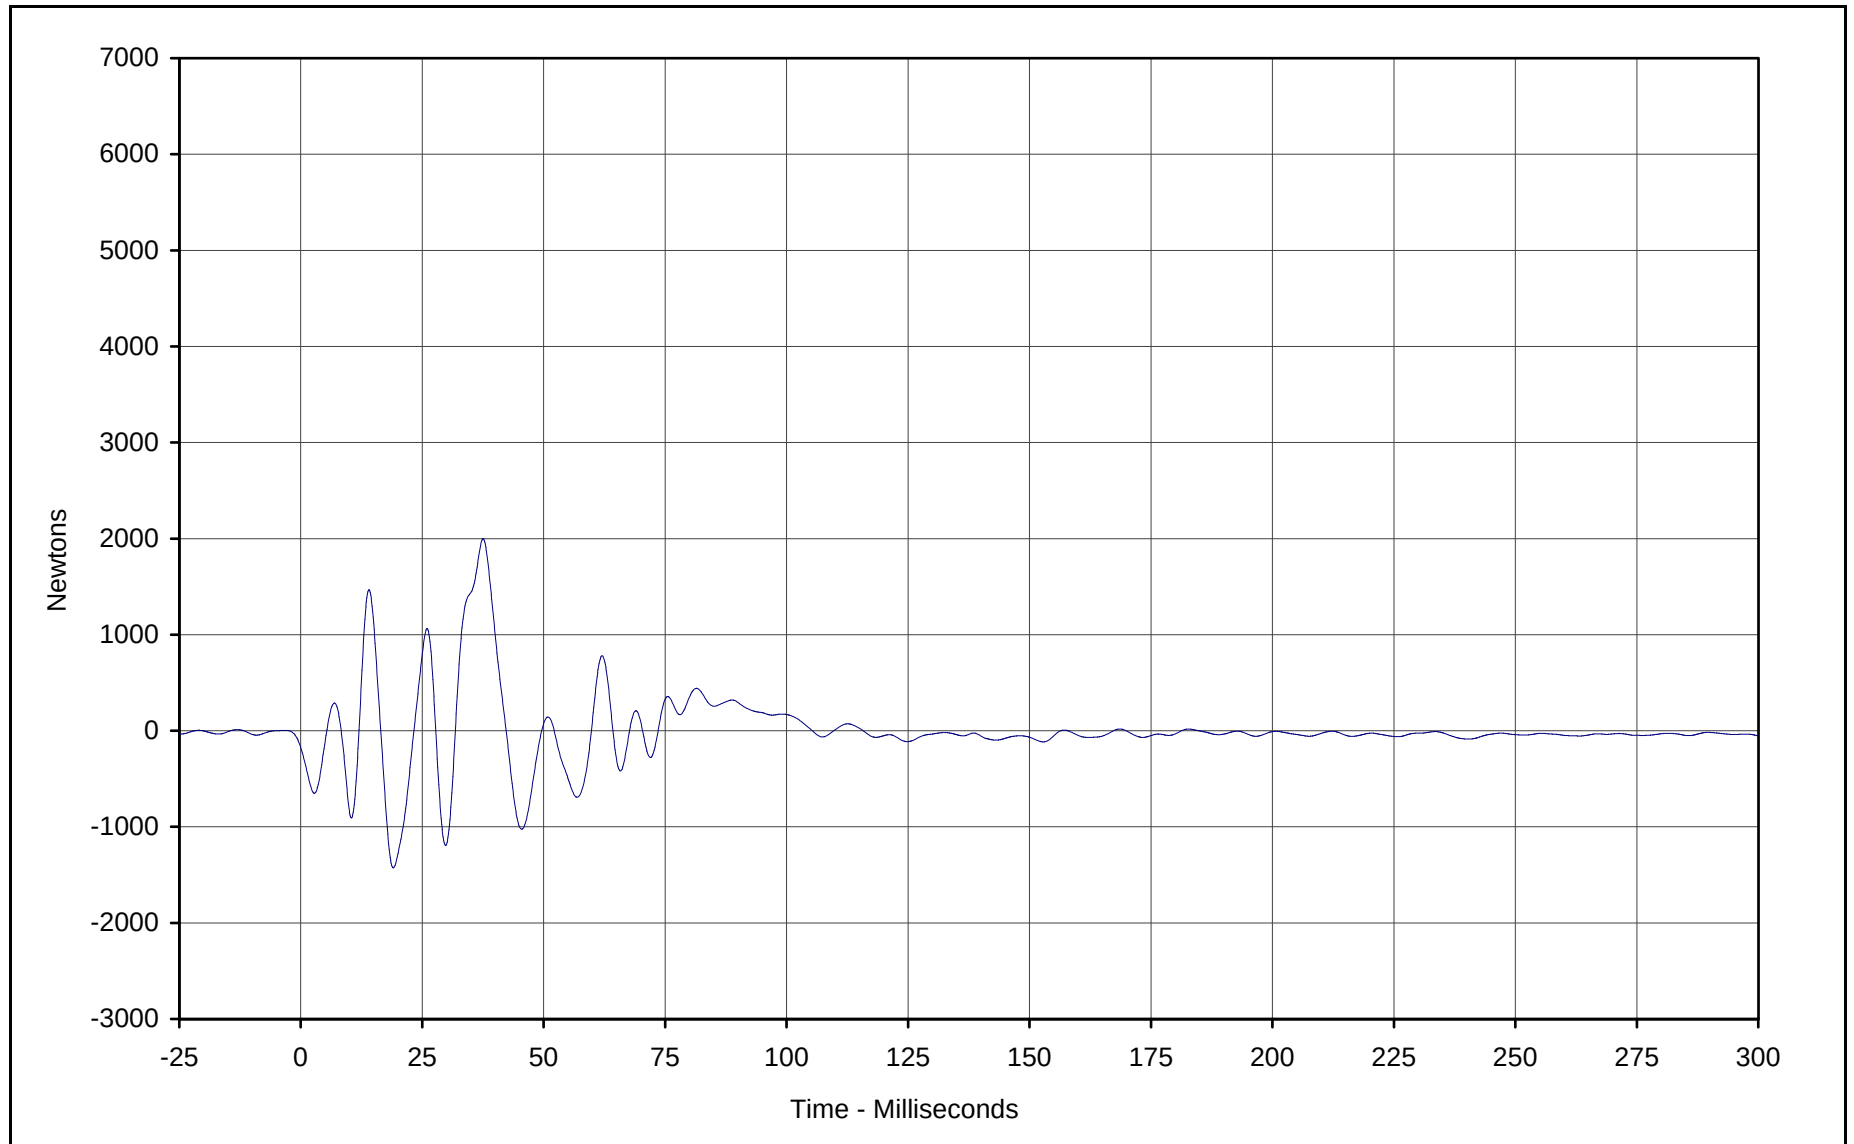


Curve Description: Barrier Force A3
Maximum Value: 1999.5 at 37.5 Milliseconds
Minimum Value: -1427.2 at 19.0 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-100

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-3

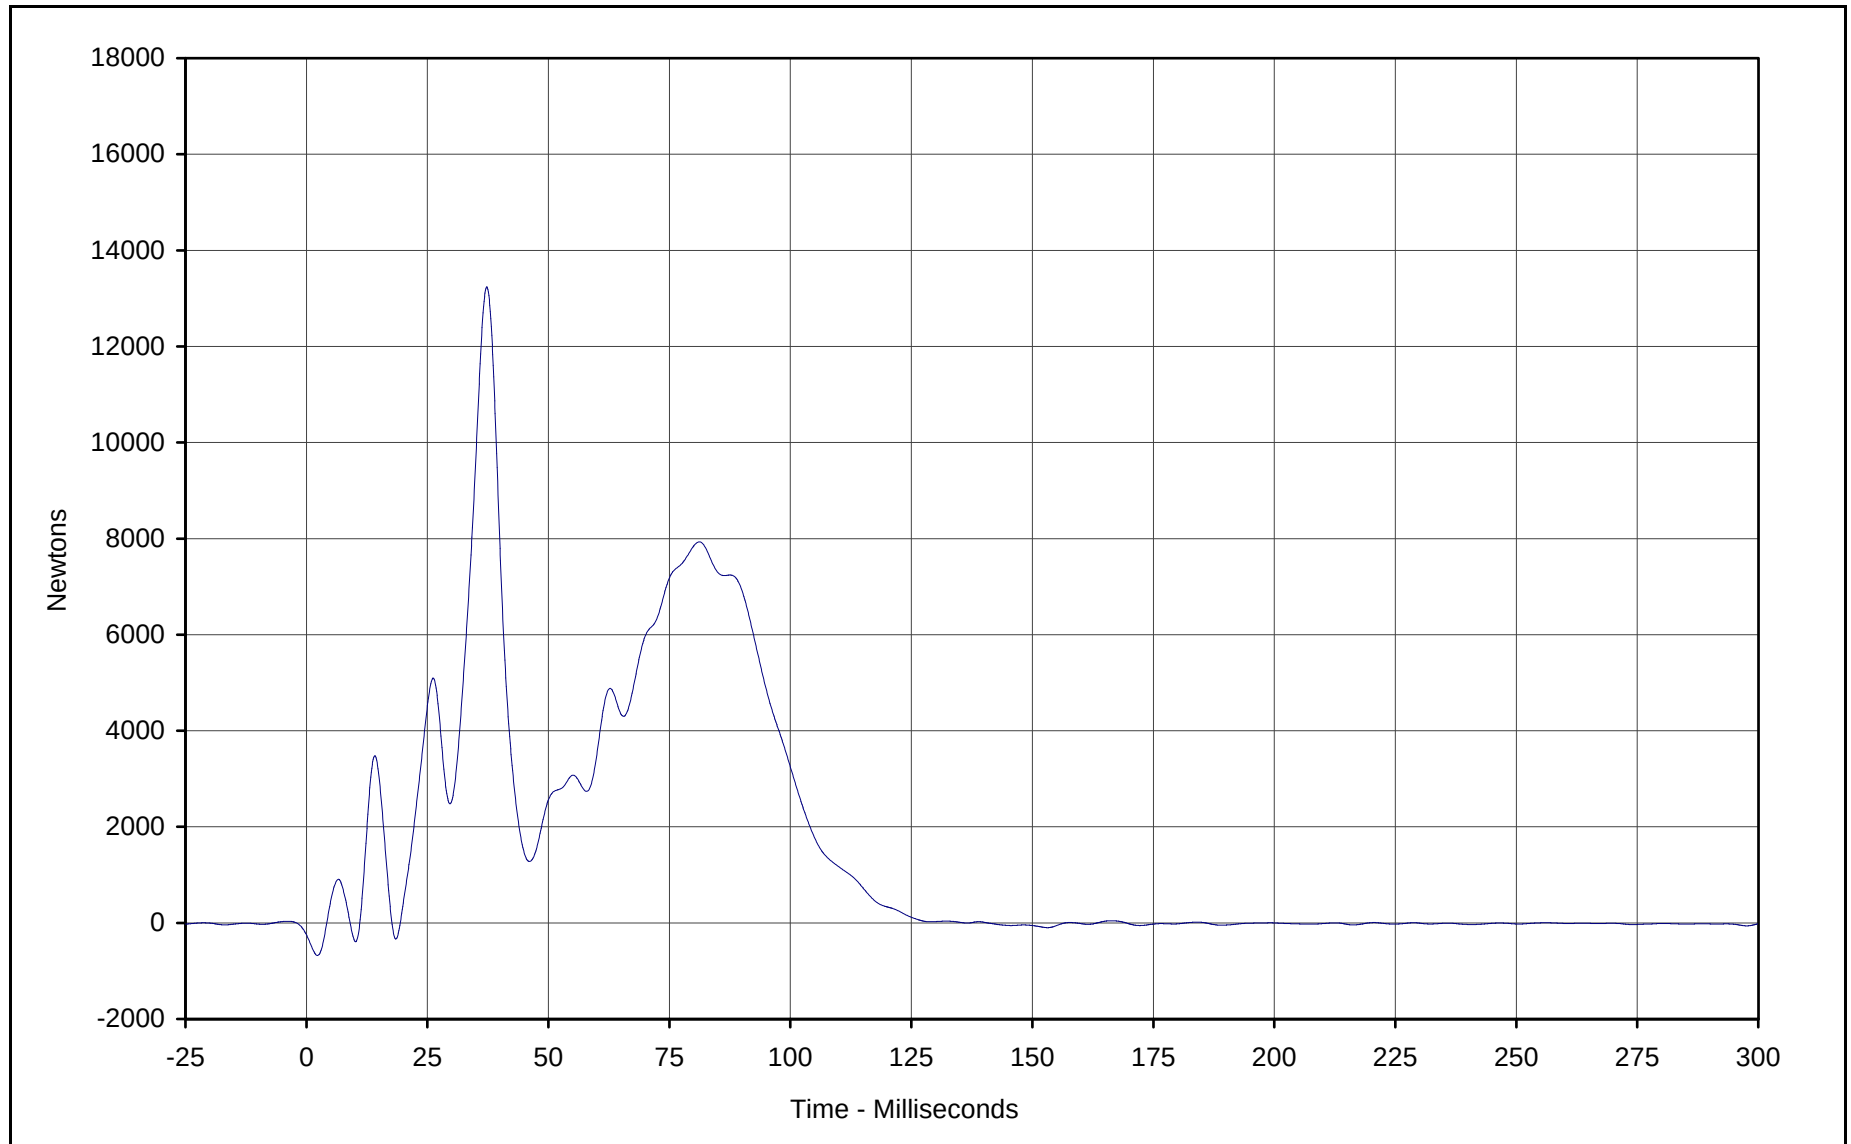


Curve Description: Barrier Force A4
Maximum Value: 13238.5 at 37.3 Milliseconds
Minimum Value: -678.8 at 2.3 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-101

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-4

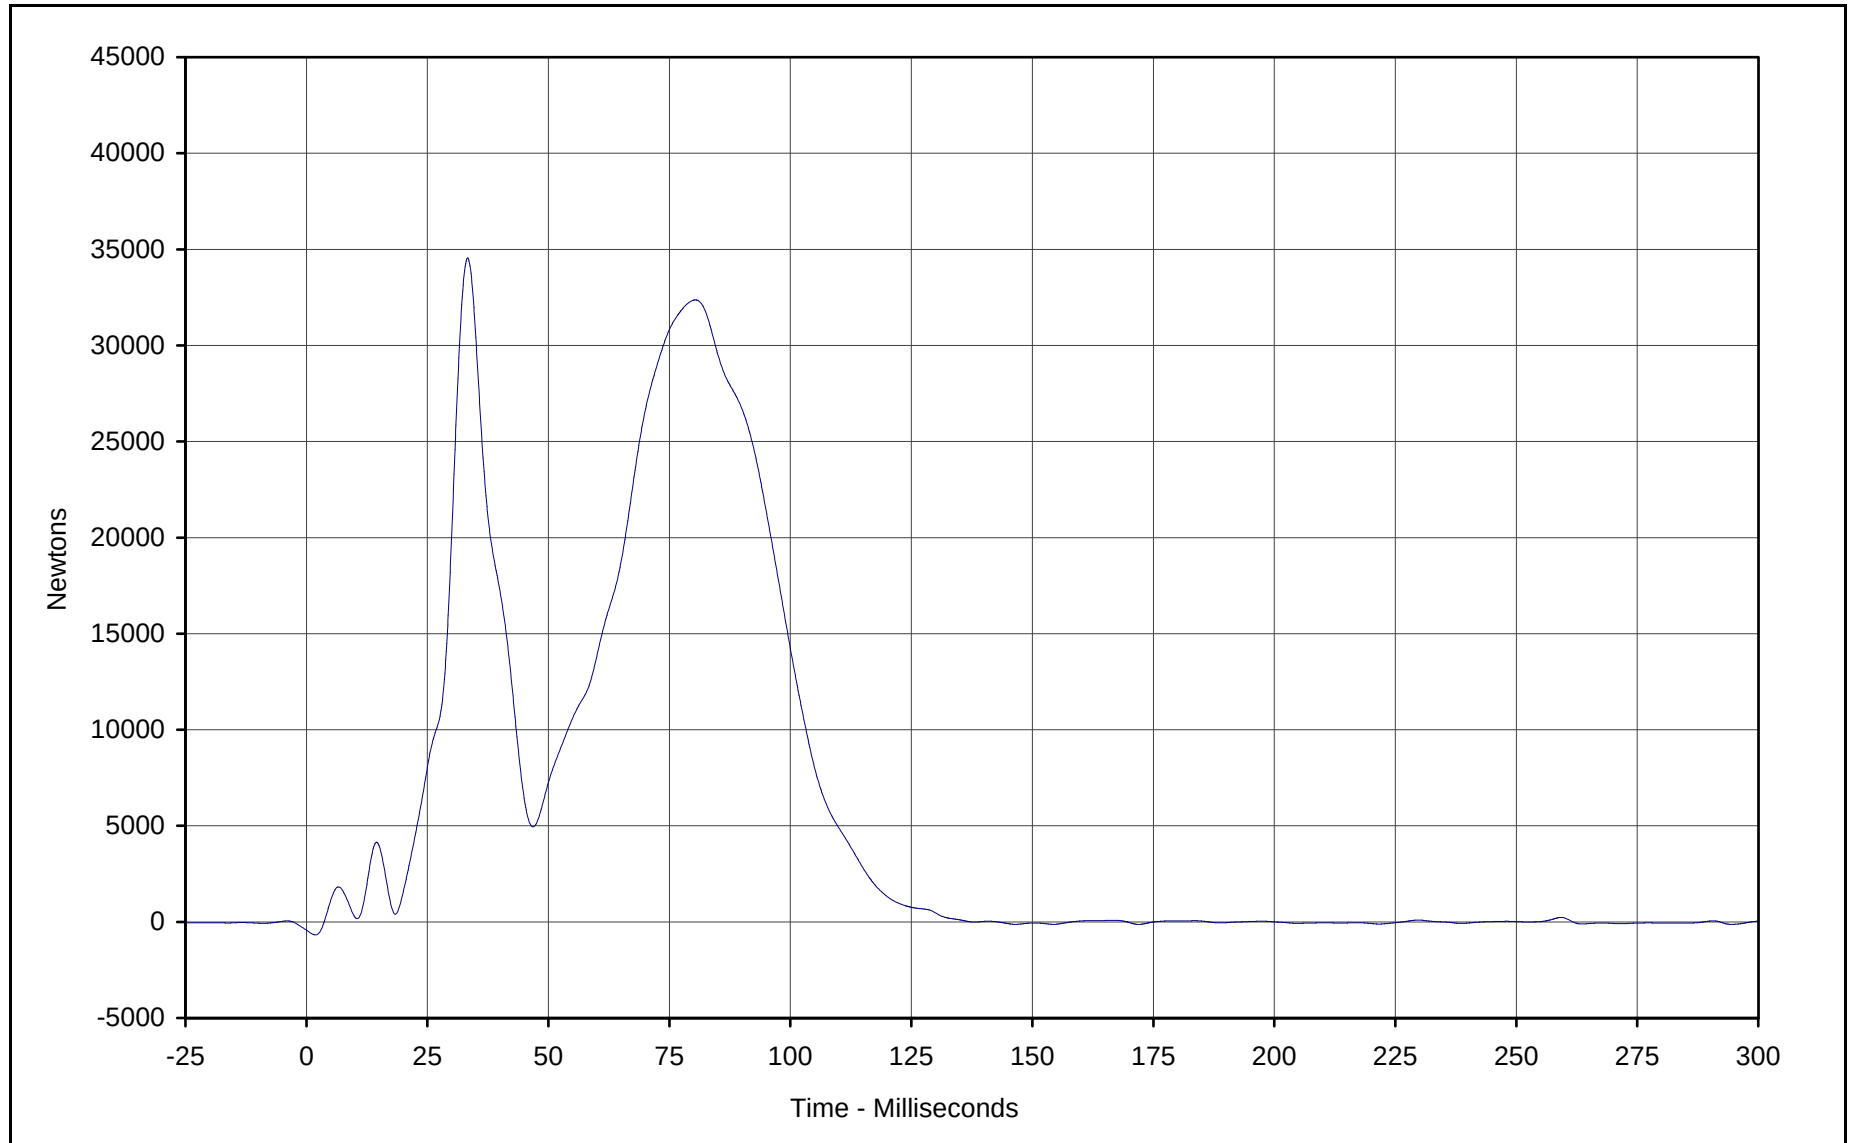

Curve Description: Barrier Force A5

Maximum Value: 34546.8 at 33.3 Milliseconds

Minimum Value: -675.8 at 1.8 Milliseconds

SAE Filter Class: 60

Date of Test: 02/13/01

Curve Number: FIL-102


Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-5

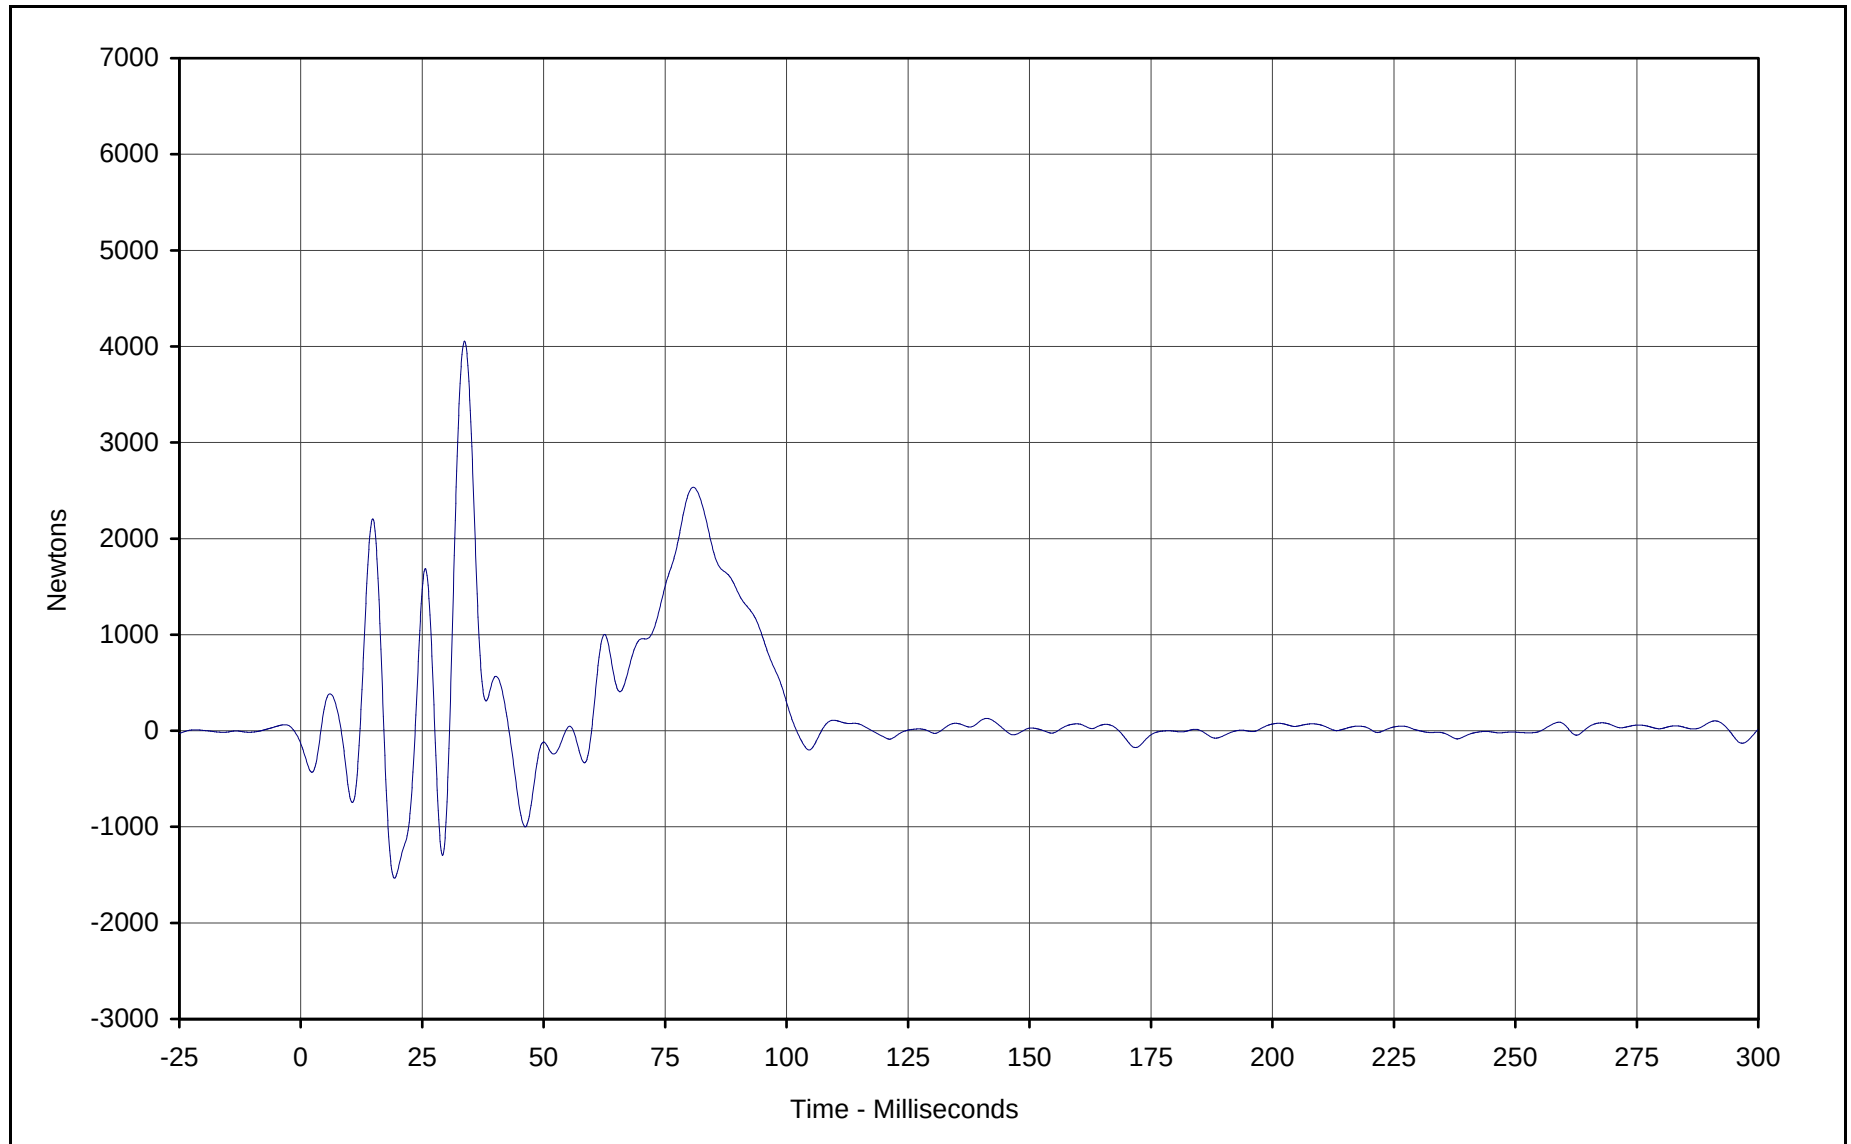

Curve Description: Barrier Force A6

Maximum Value: 4054.6 at 33.7 Milliseconds

Minimum Value: -1534.3 at 19.3 Milliseconds

SAE Filter Class: 60

Date of Test: 02/13/01

Curve Number: FIL-103


Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-6

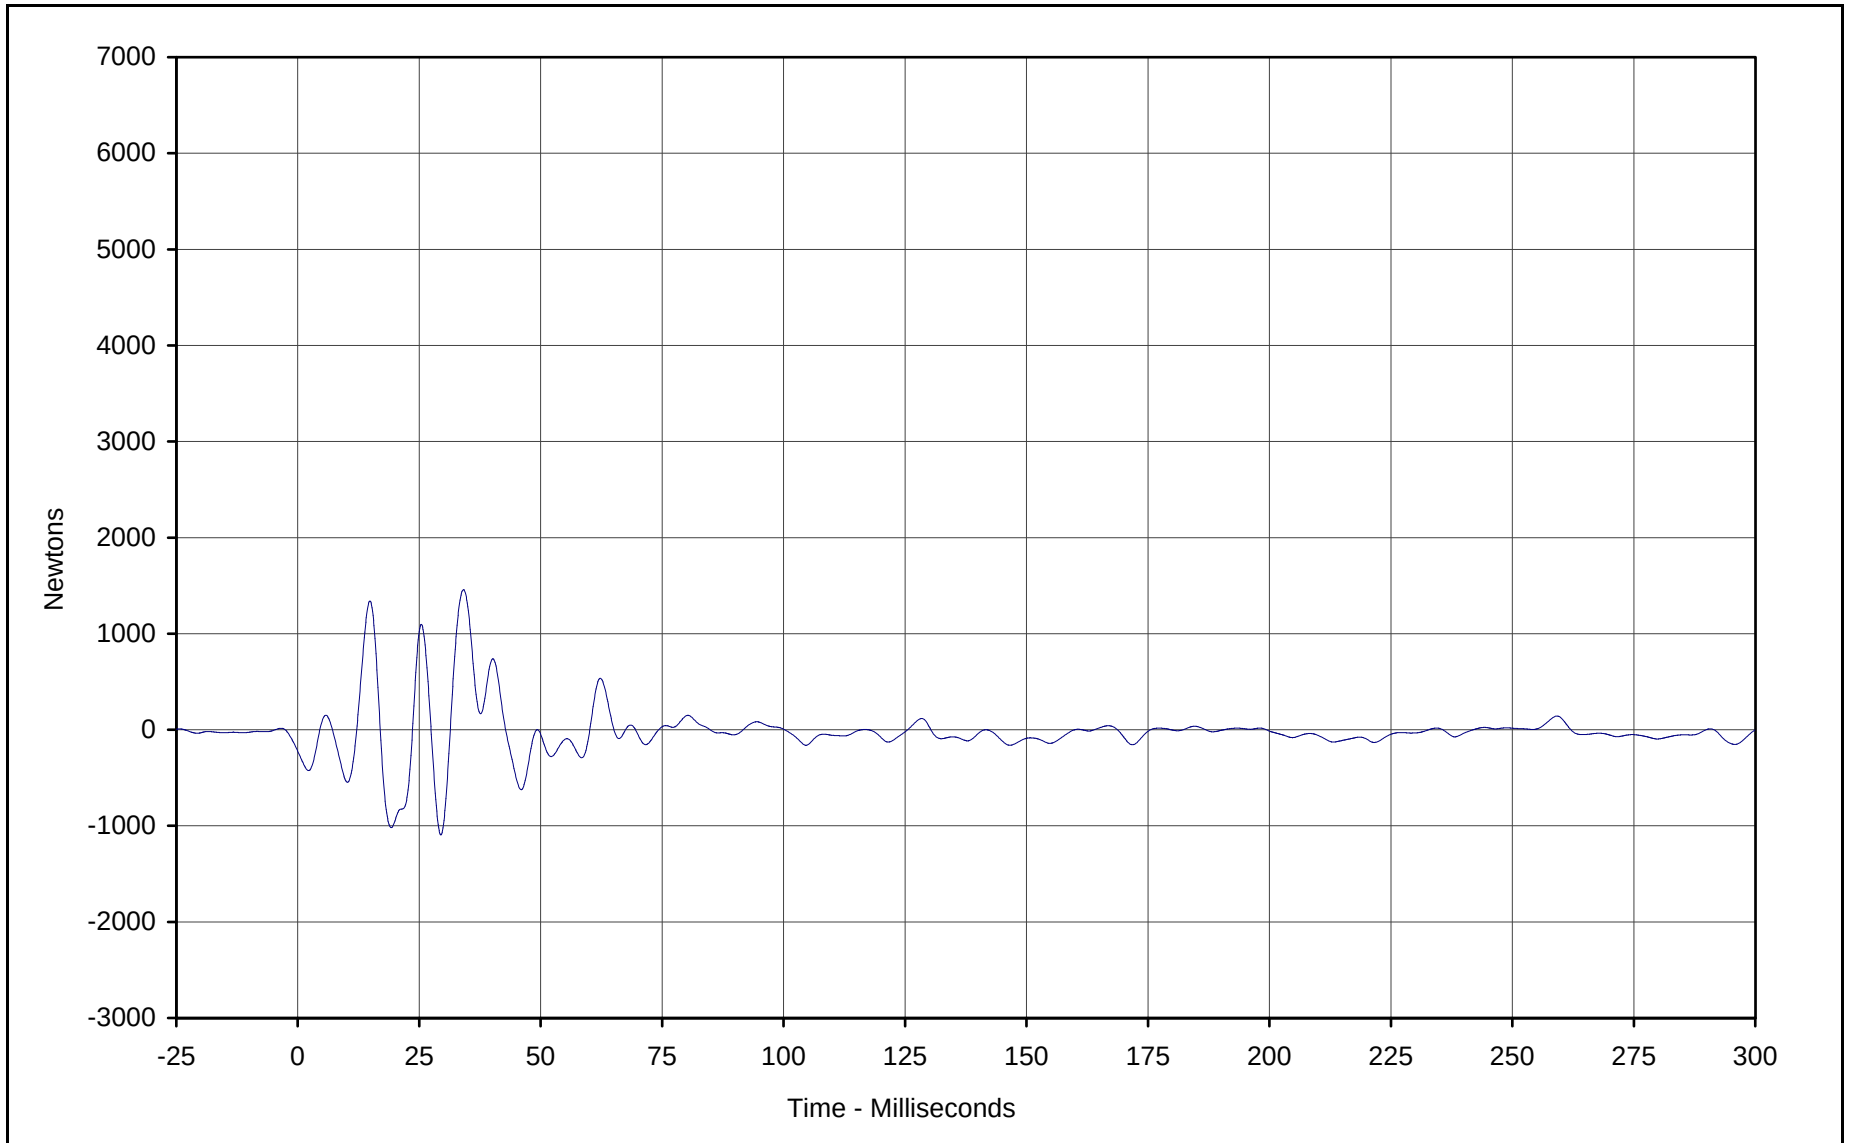


Curve Description: Barrier Force A7
Maximum Value: 1458.6 at 34.1 Milliseconds
Minimum Value: -1092.7 at 29.5 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-104

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-7

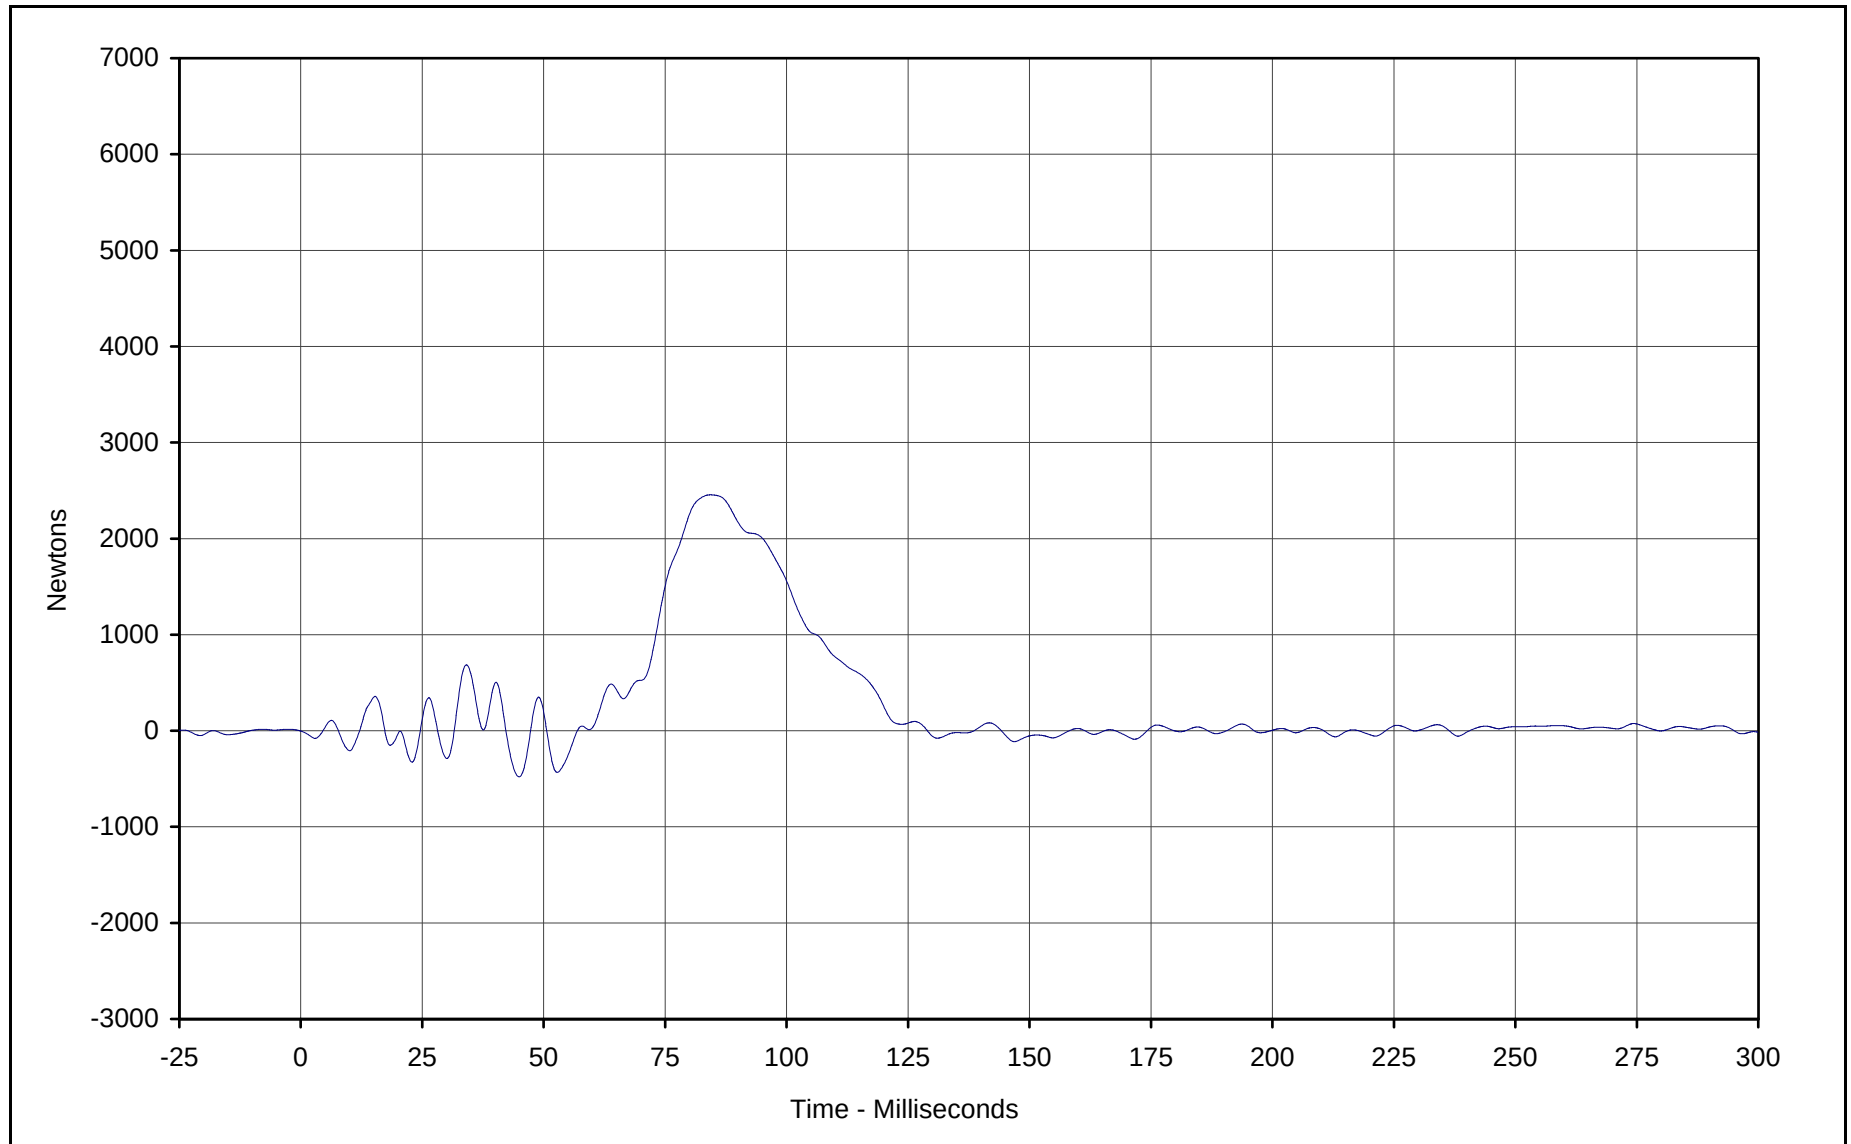


Curve Description: Barrier Force A8
Maximum Value: 2455.3 at 84.4 Milliseconds
Minimum Value: -479.0 at 44.9 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-105

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-8

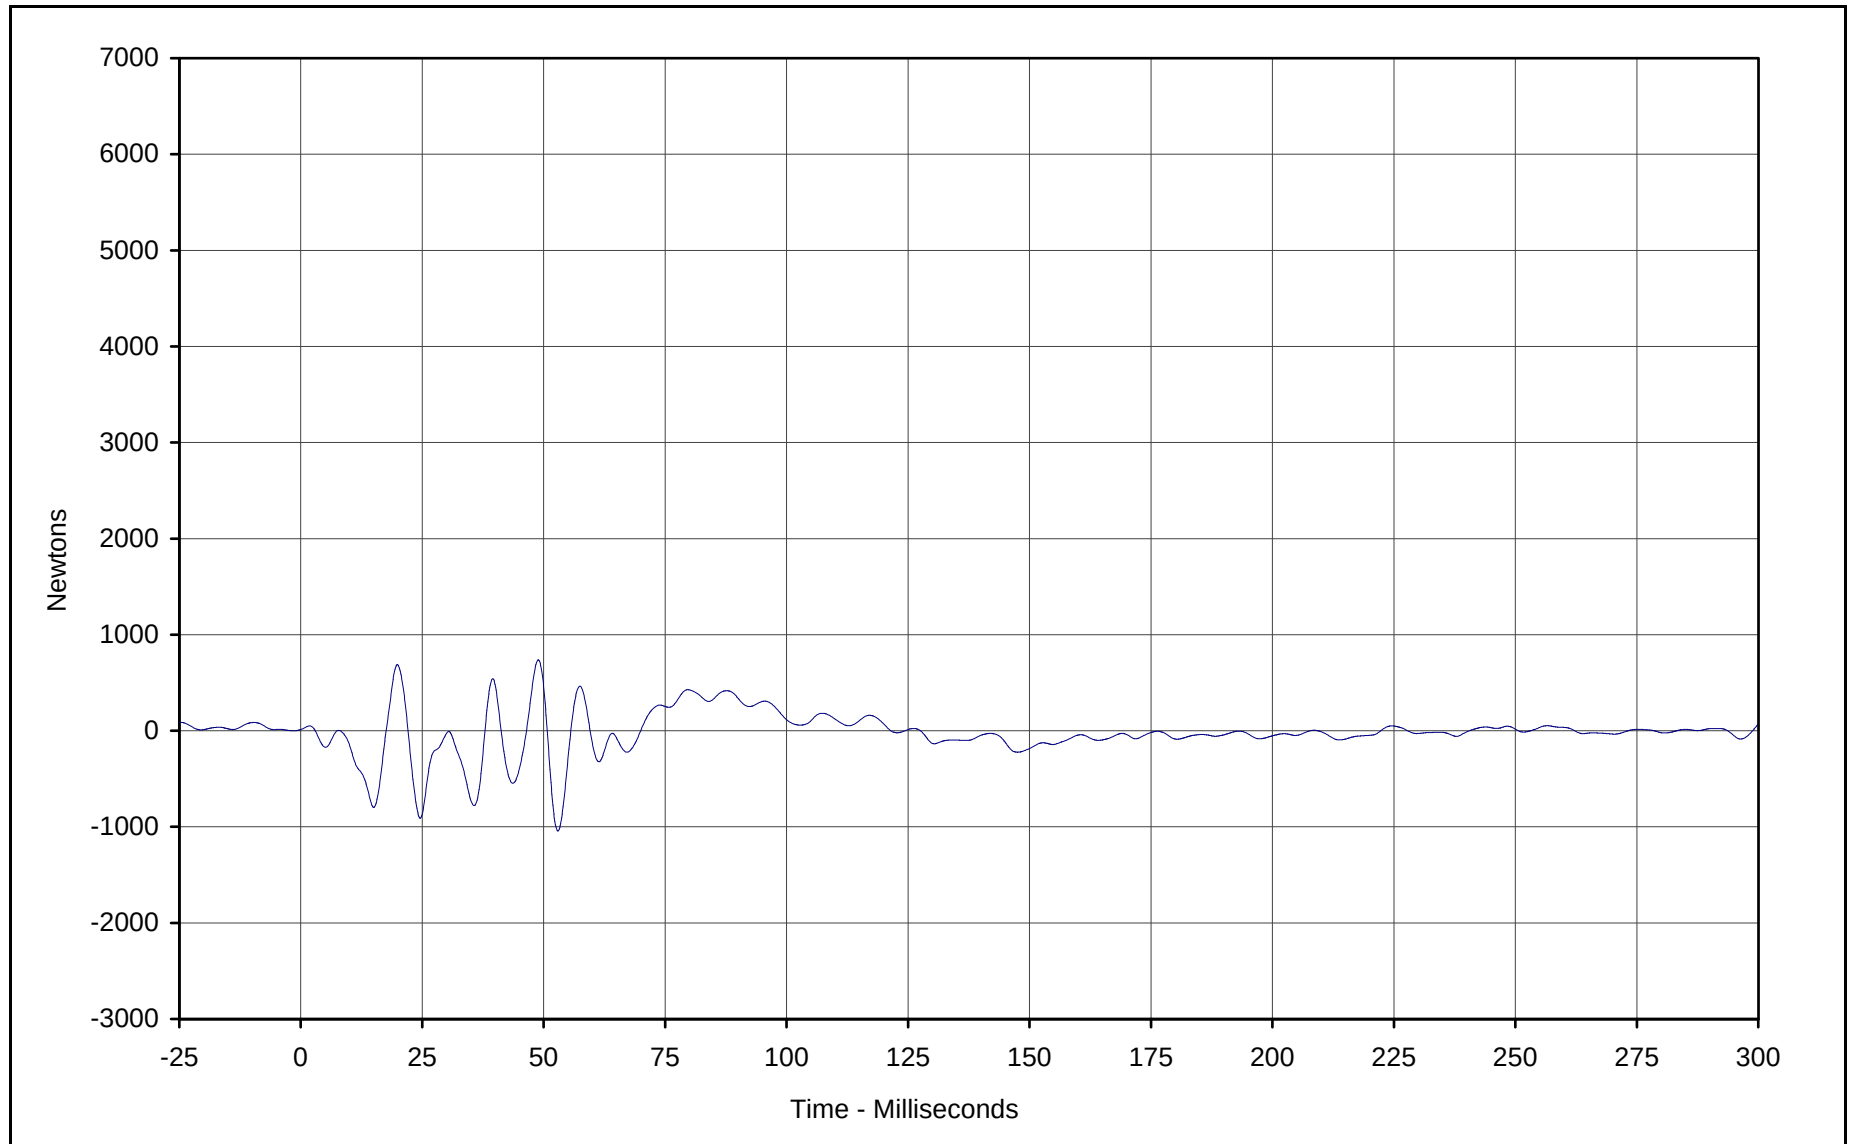

Curve Description: Barrier Force A9

Maximum Value: 737.2 at 48.9 Milliseconds

Minimum Value: -1042.1 at 52.9 Milliseconds

SAE Filter Class: 60

Date of Test: 02/13/01

Curve Number: FIL-106


Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-9

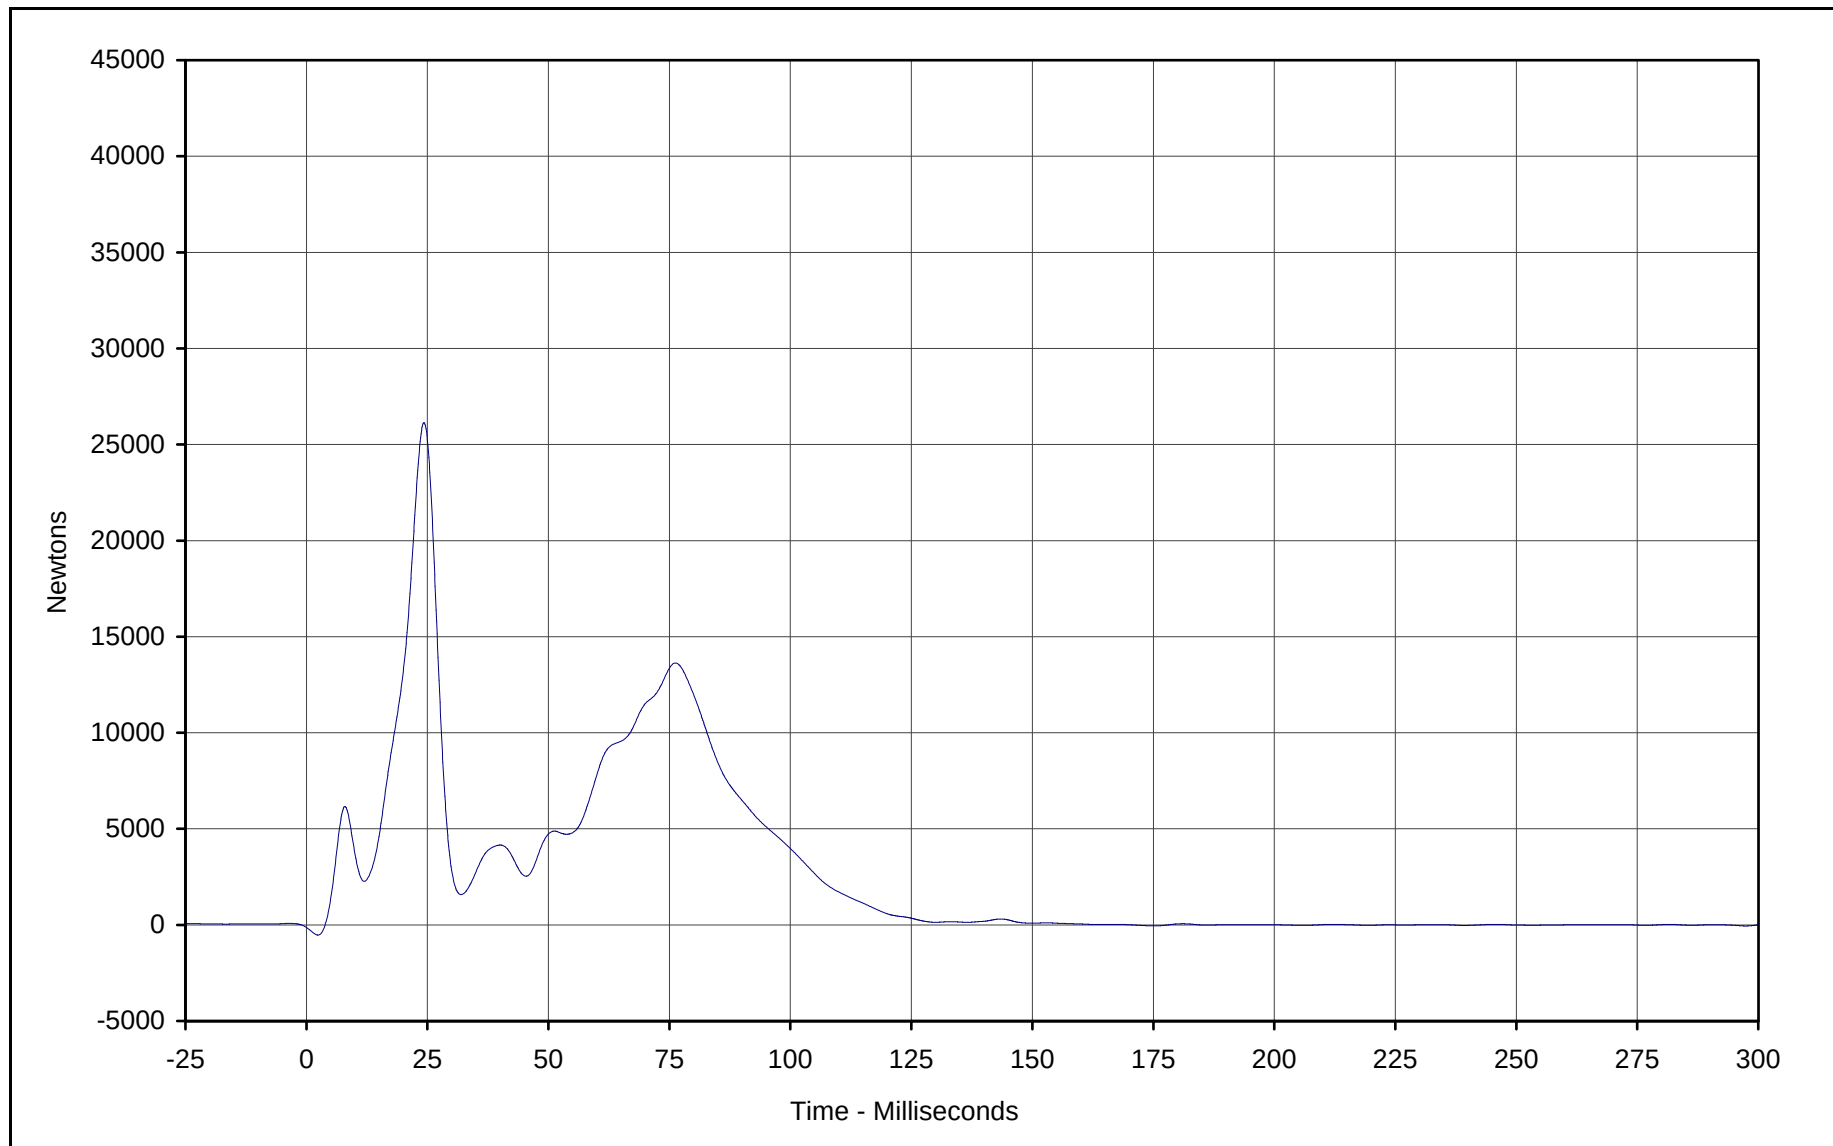


Curve Description: Barrier Force B2
Maximum Value: 26142.3 at 24.3 Milliseconds
Minimum Value: -527.7 at 2.4 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-108

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-10

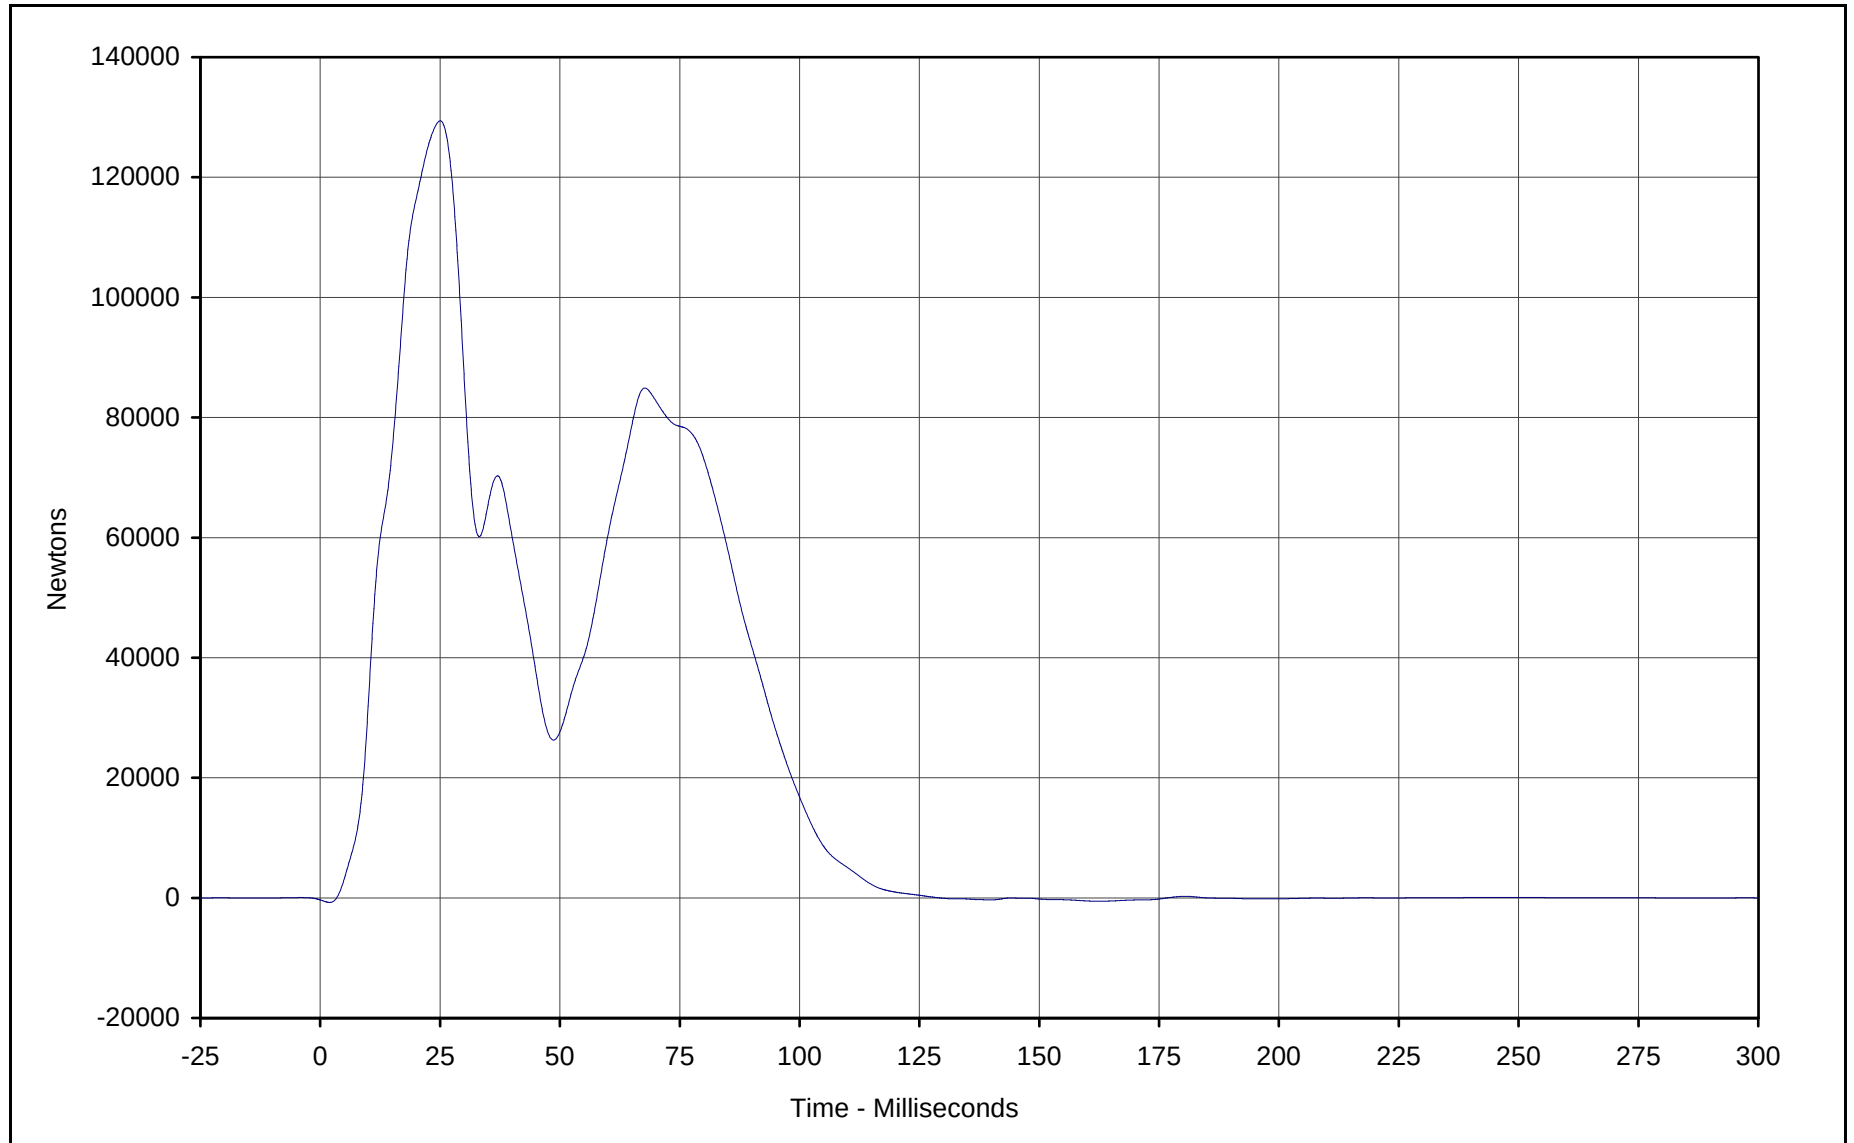


Curve Description: Barrier Force B3
Maximum Value: 129417.8 at 25.0 Milliseconds
Minimum Value: -759.8 at 2.0 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-109

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-11

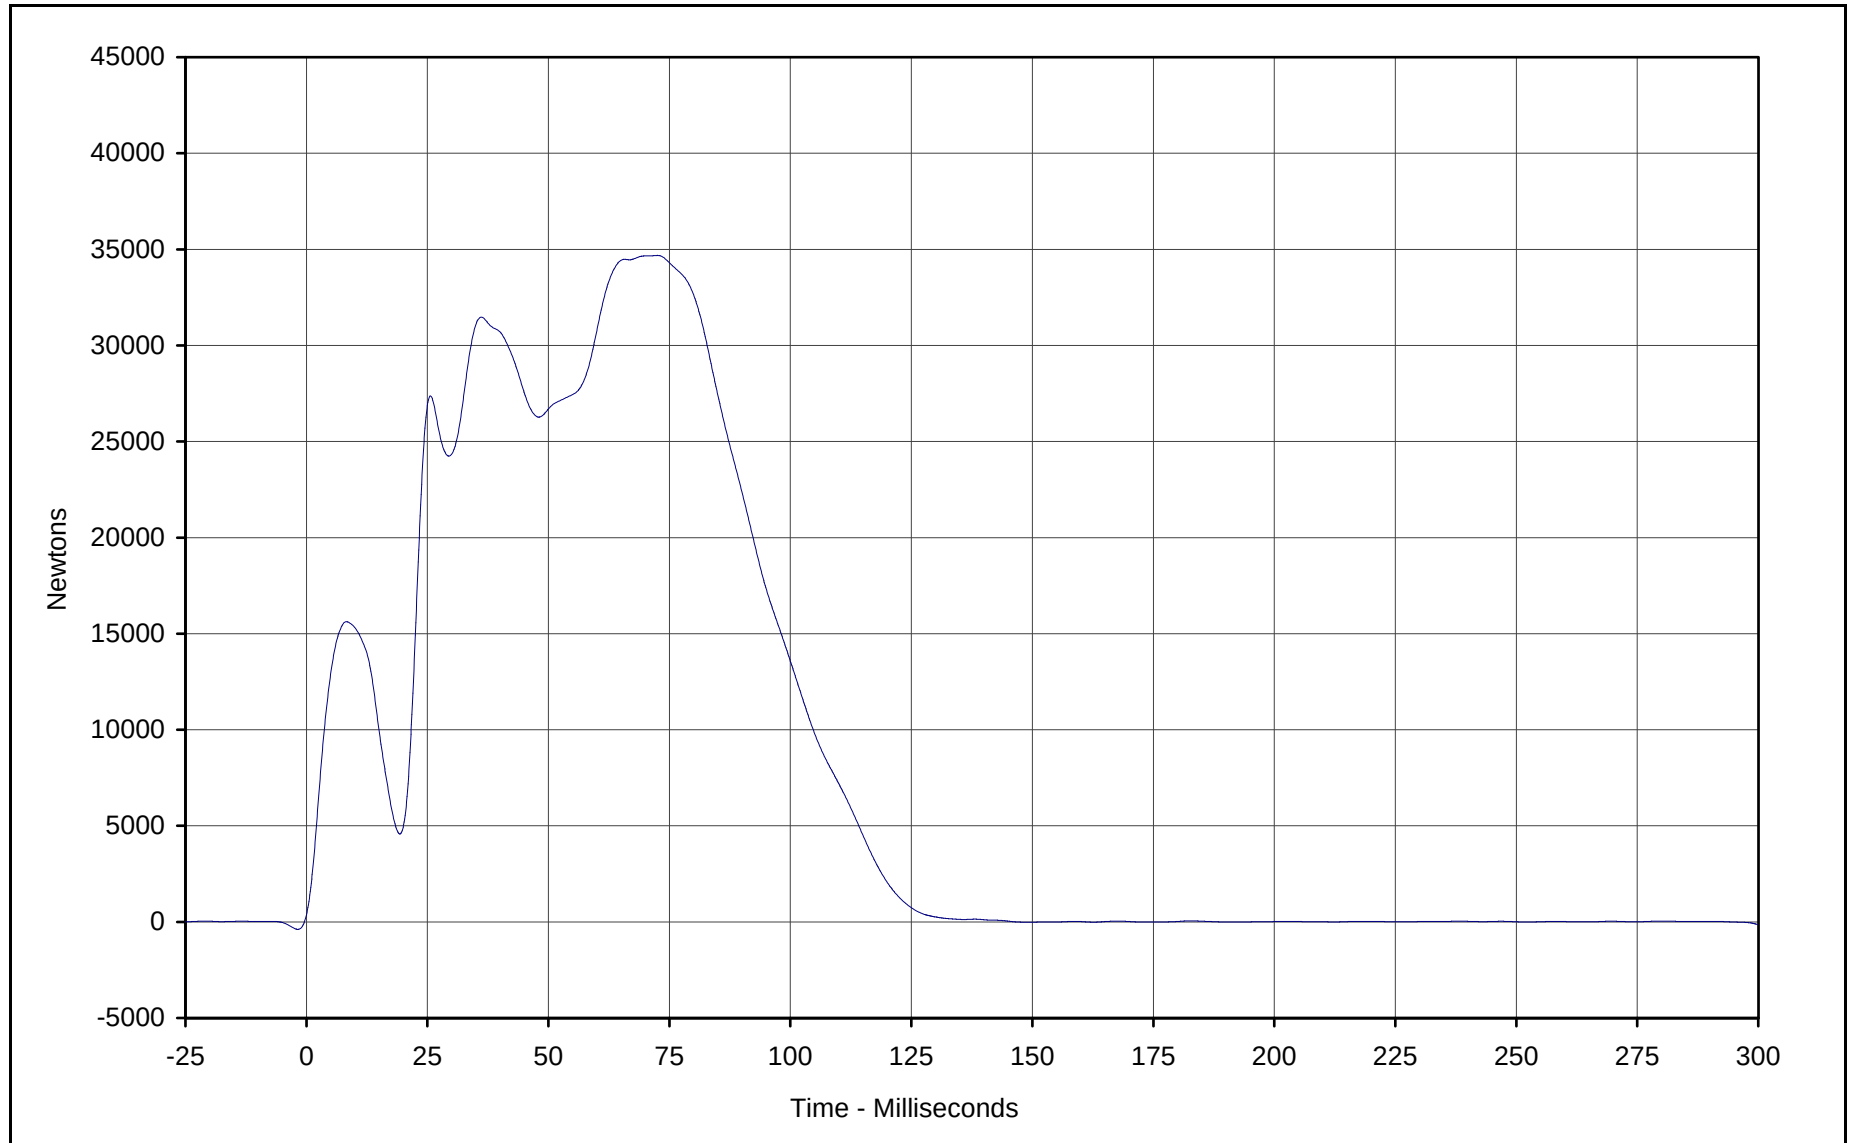

Curve Description: Barrier Force B4

Maximum Value: 34682.3 at 72.5 Milliseconds

Minimum Value: -145.6 at 299.9 Milliseconds

SAE Filter Class: 60

Date of Test: 02/13/01

Curve Number: FIL-110


Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-12

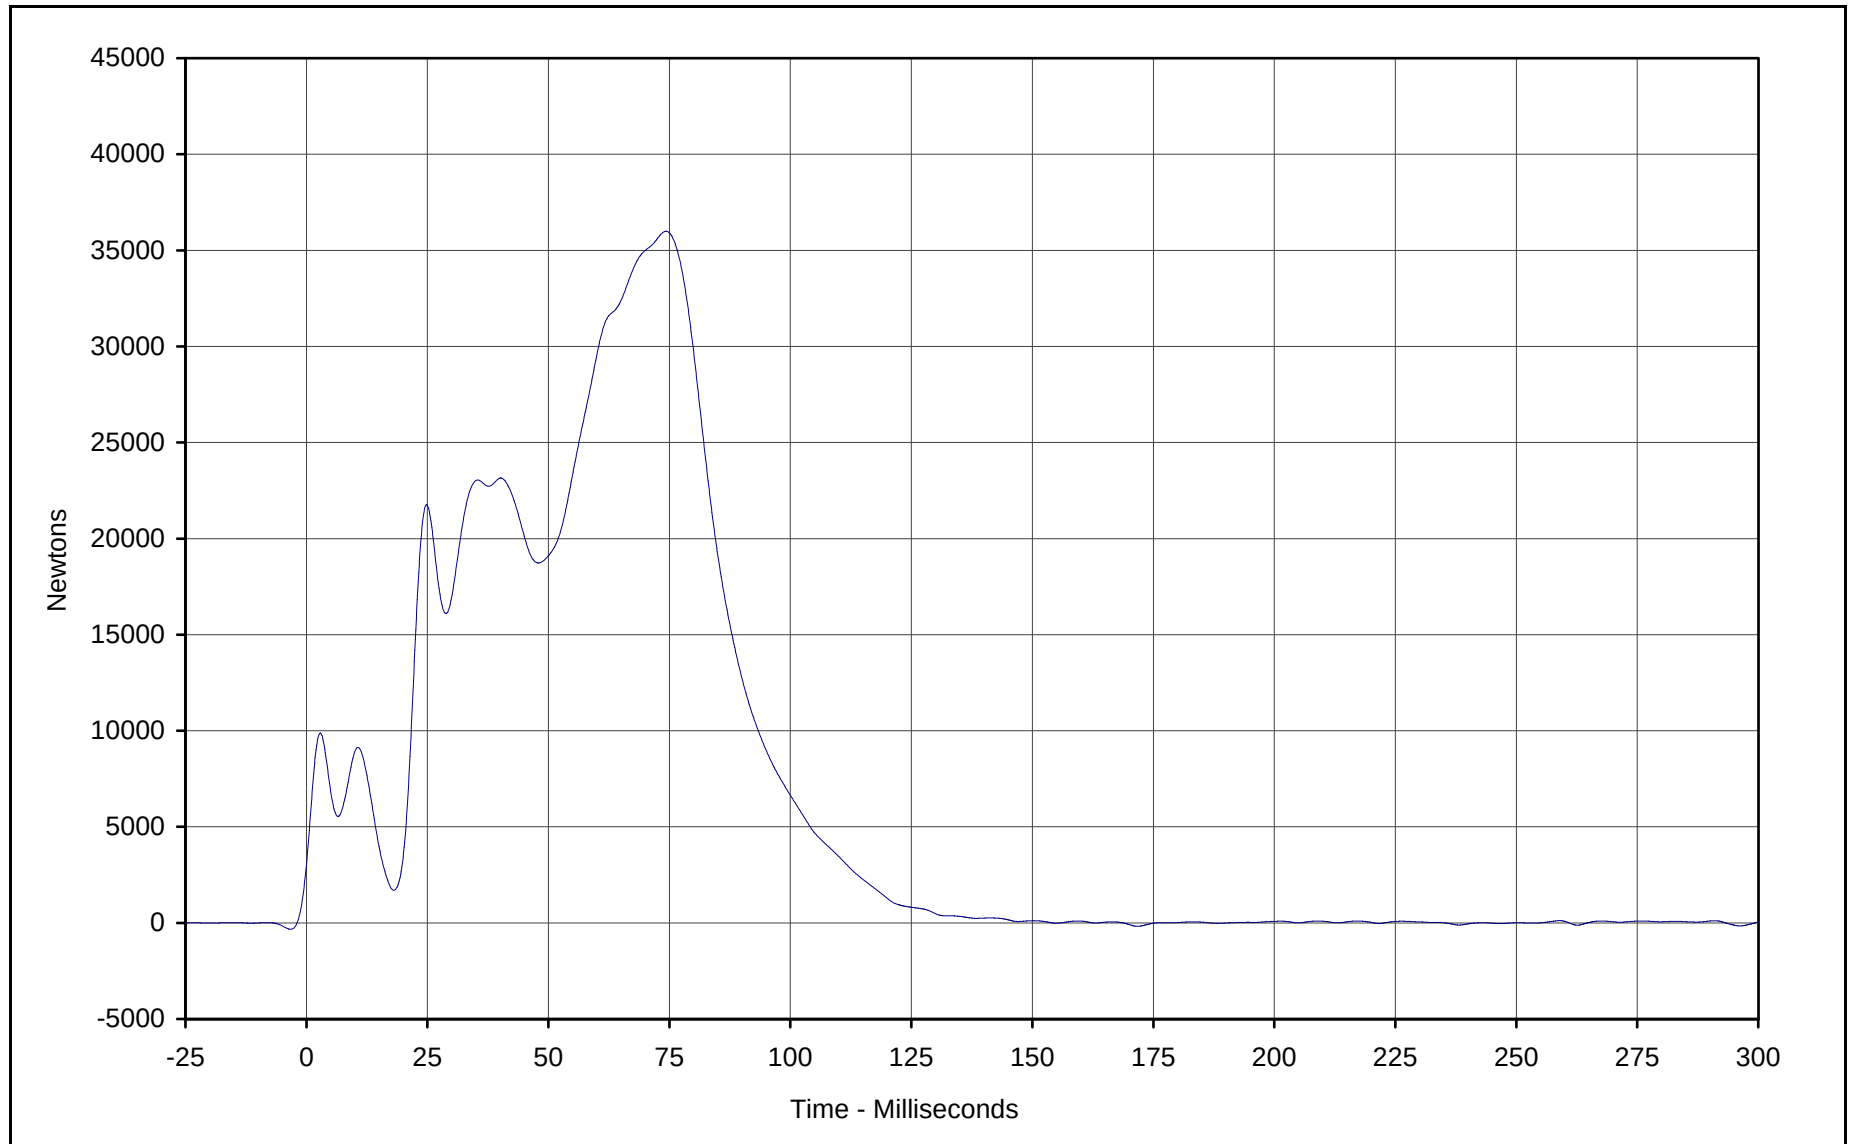


Curve Description: Barrier Force B5
Maximum Value: 35990.6 at 74.3 Milliseconds
Minimum Value: -177.6 at 171.7 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-111

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-13

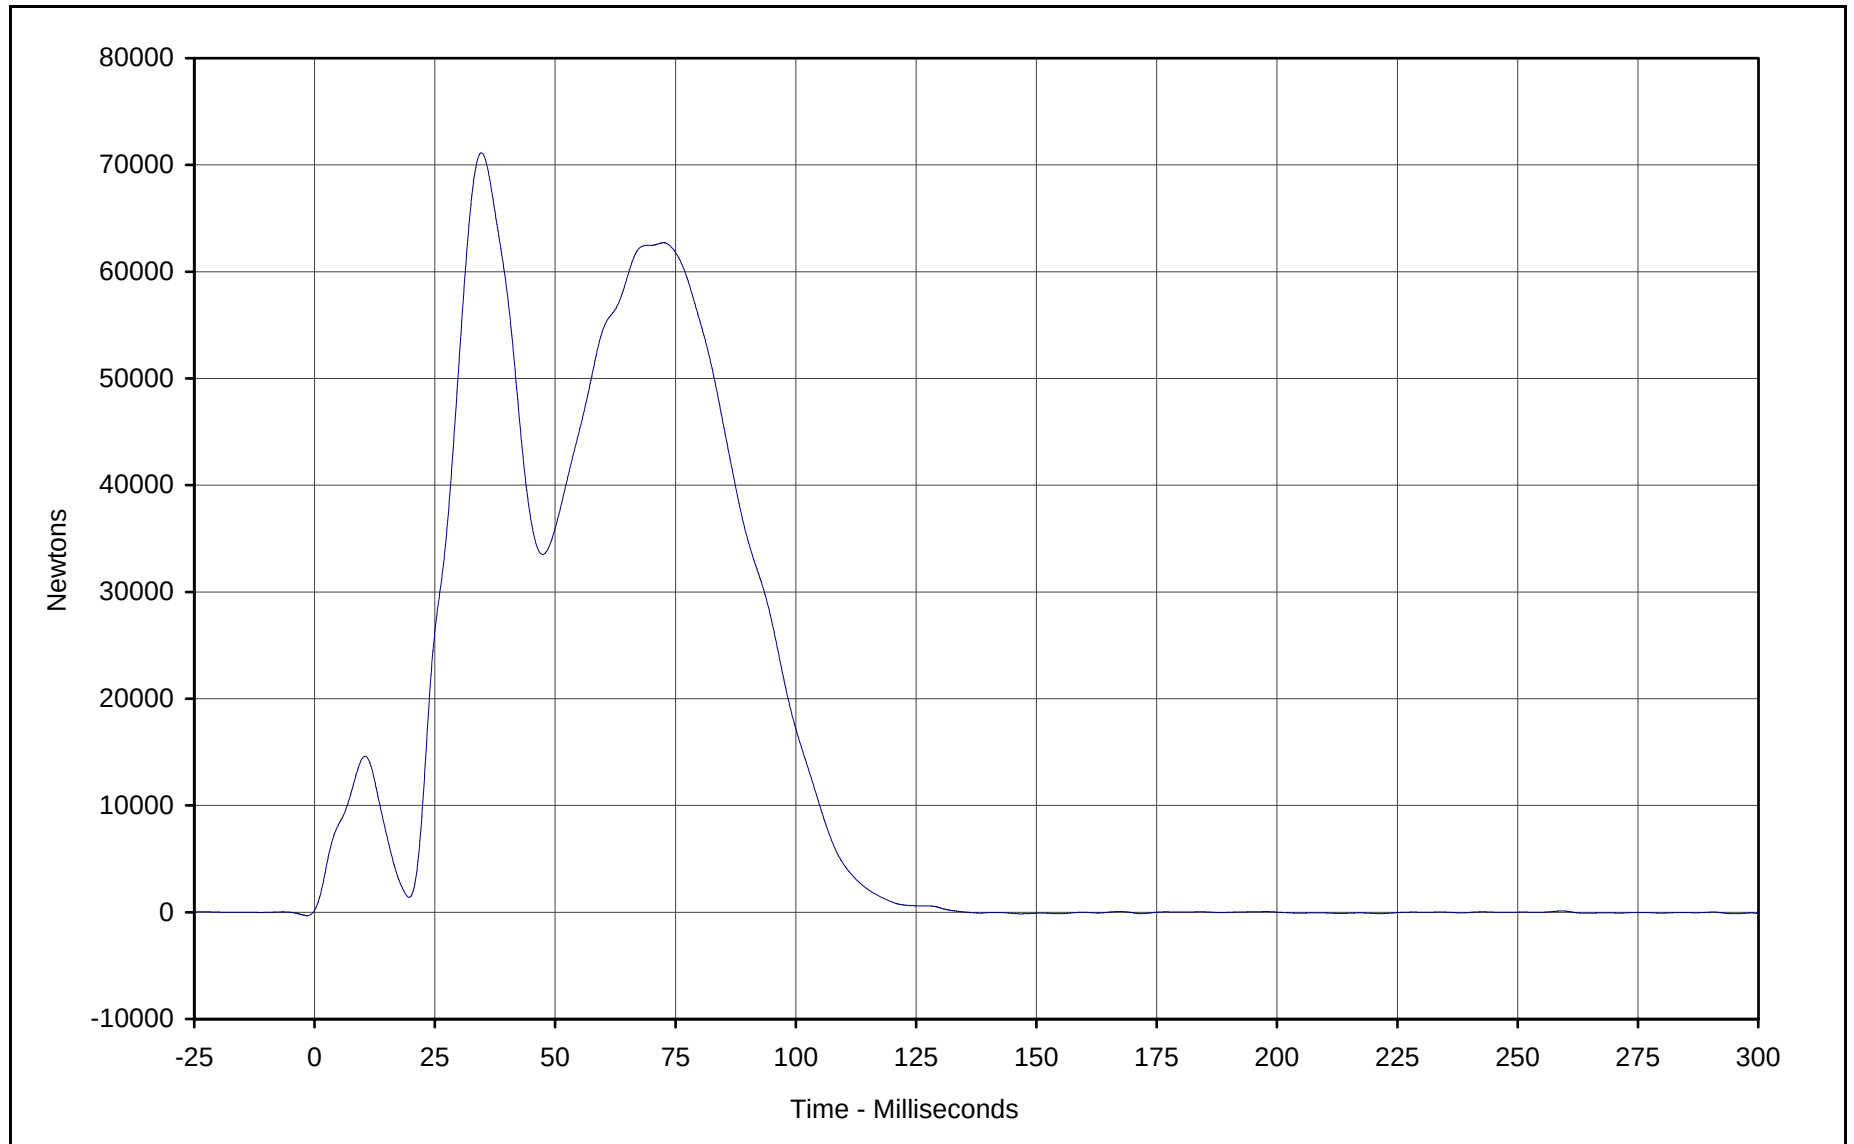


Curve Description: Barrier Force B6
Maximum Value: 71134.2 at 34.7 Milliseconds
Minimum Value: -149.2 at 146.7 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-112

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-14

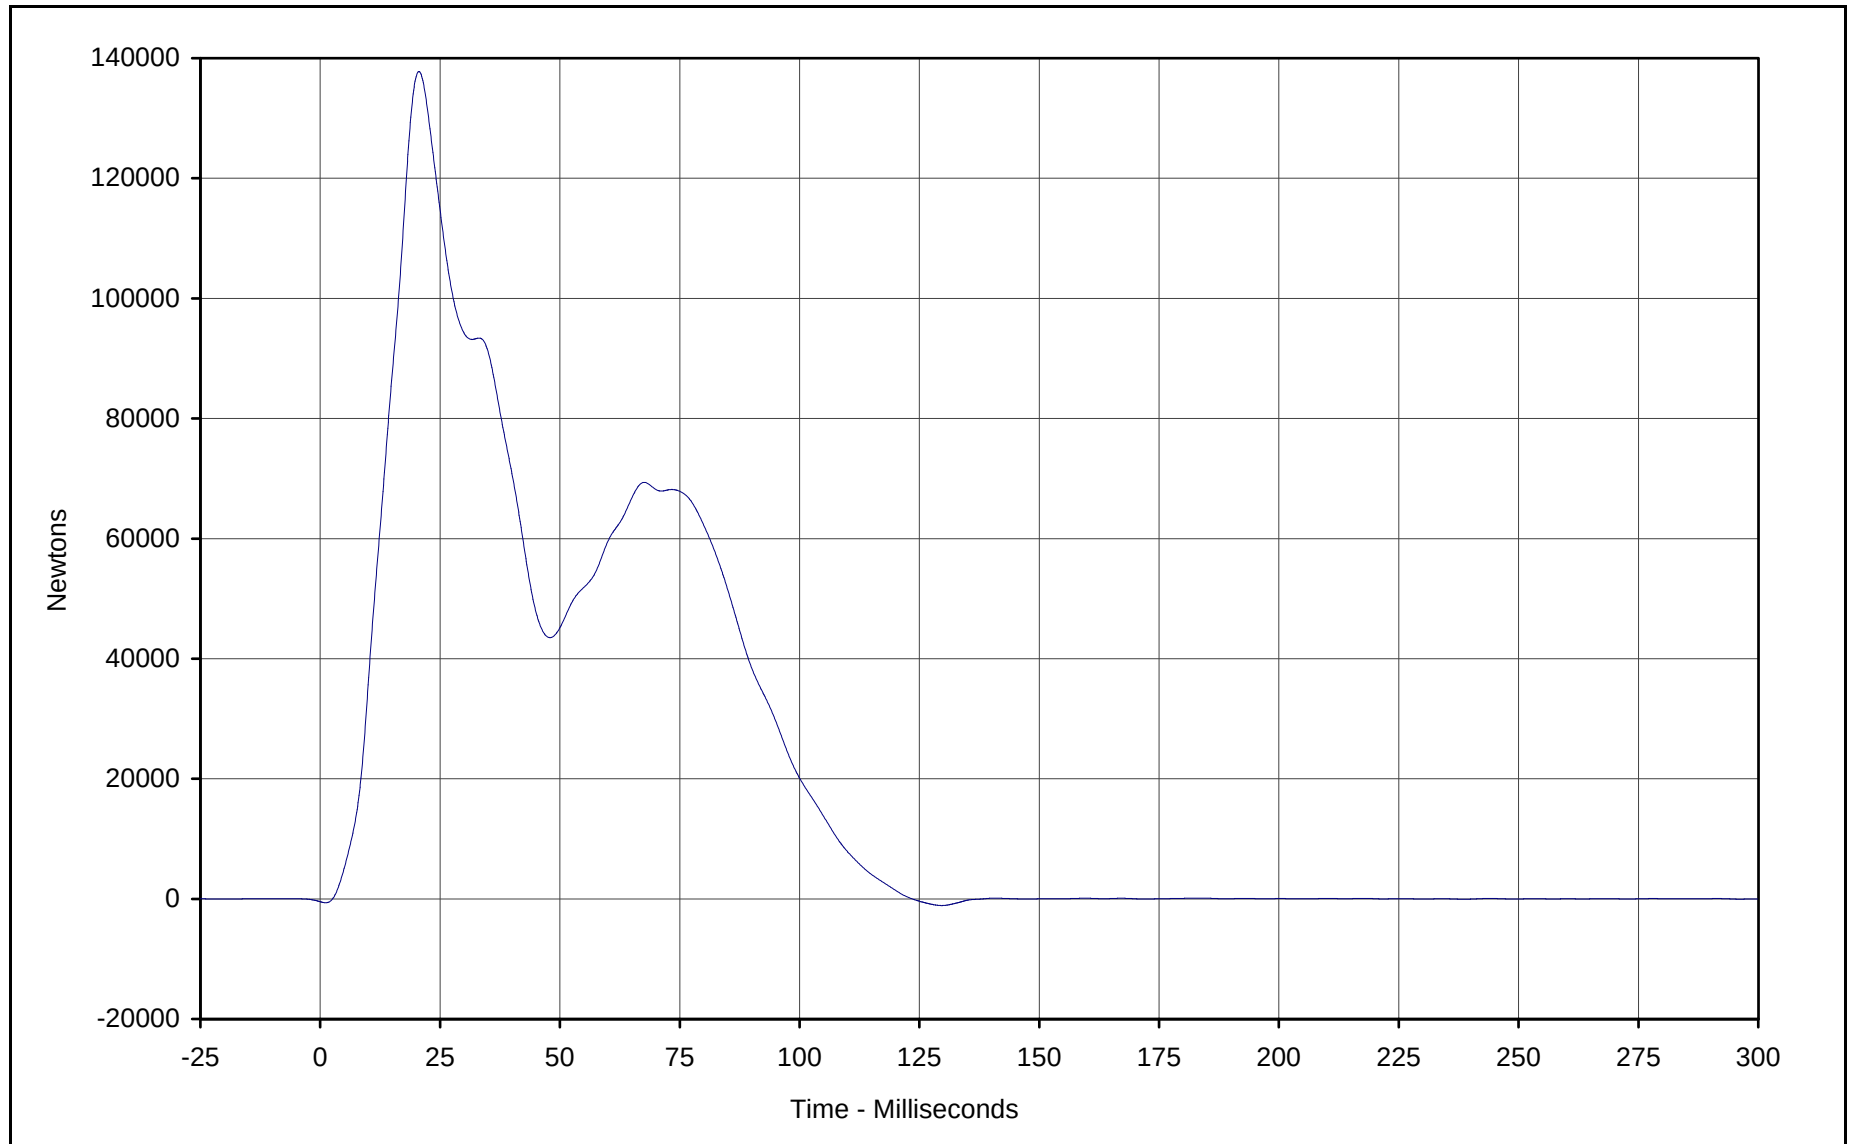


Curve Description: Barrier Force B7
Maximum Value: 137793.8 at 20.6 Milliseconds
Minimum Value: -1107.5 at 129.6 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-113

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-15

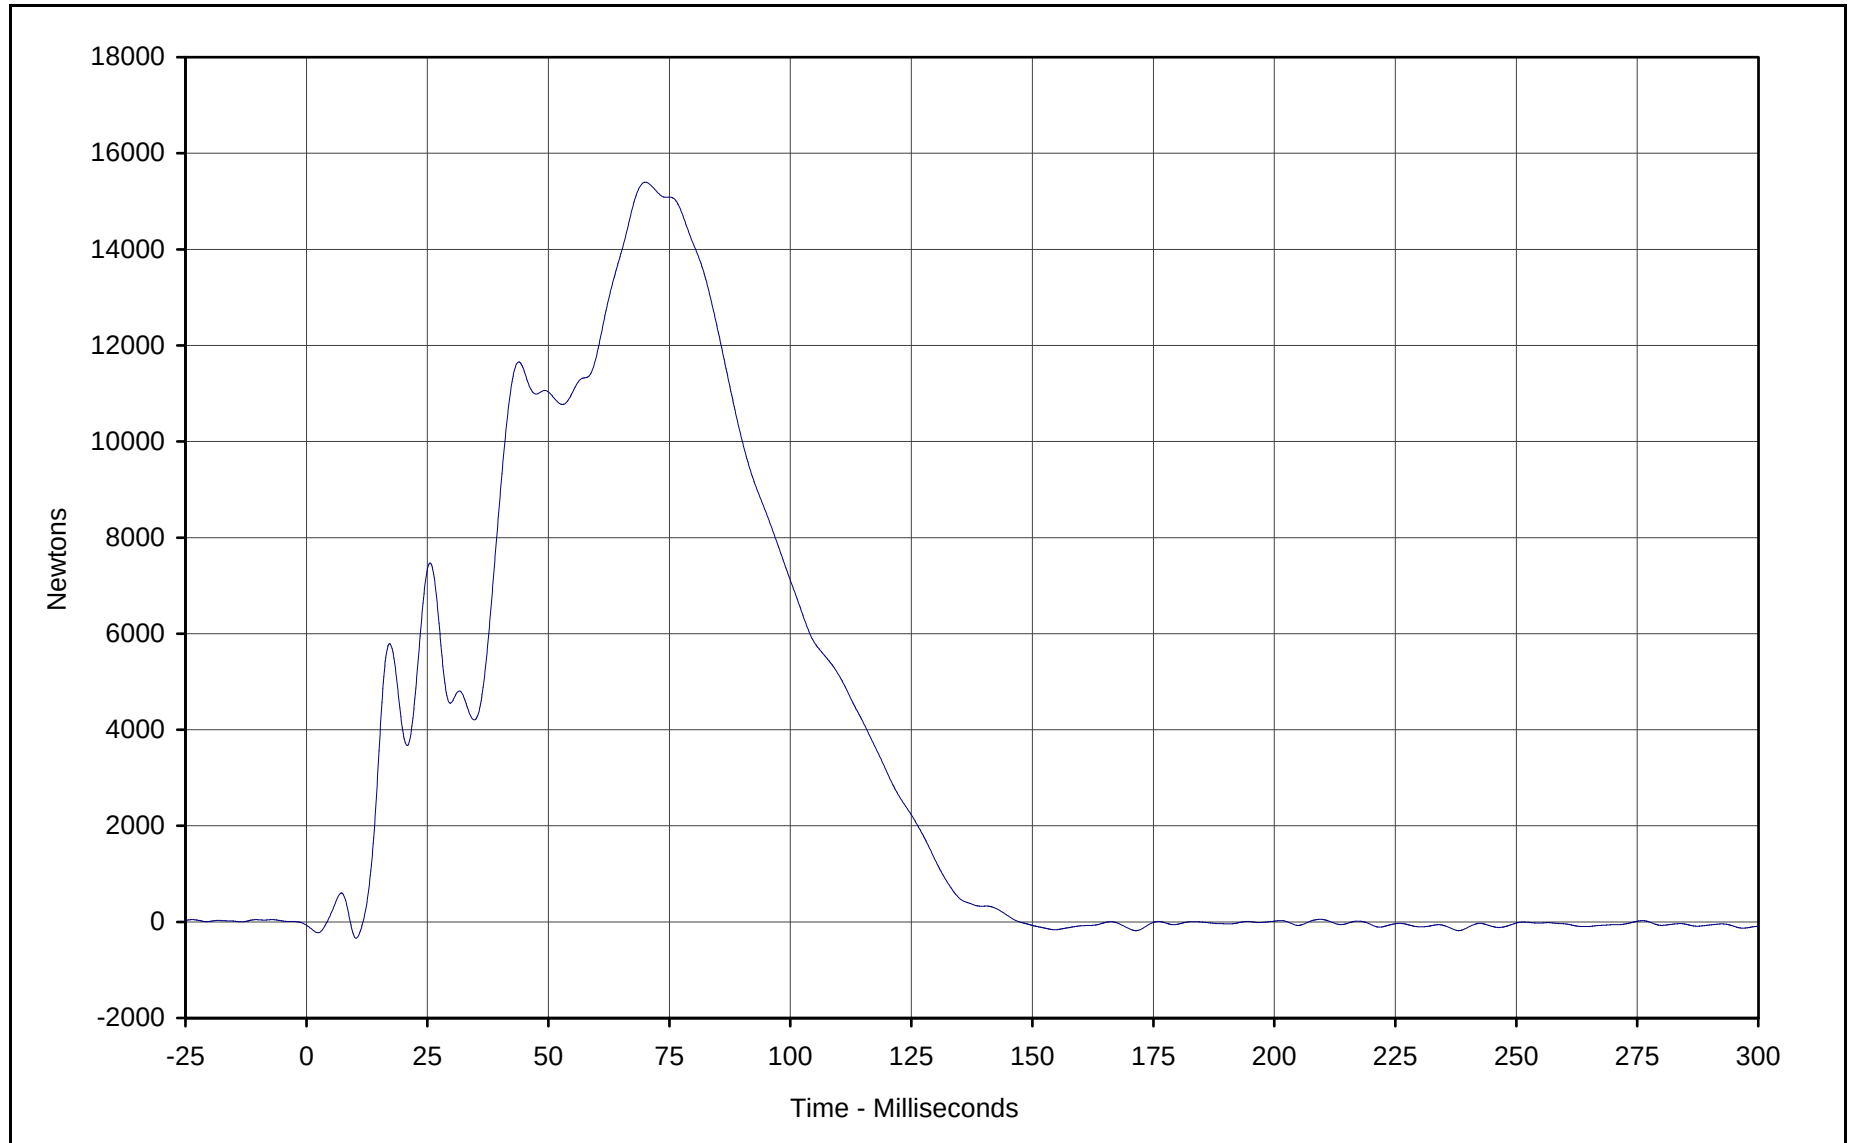


Curve Description: Barrier Force B8
Maximum Value: 15396.6 at 70.0 Milliseconds
Minimum Value: -338.0 at 10.3 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-114

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-16

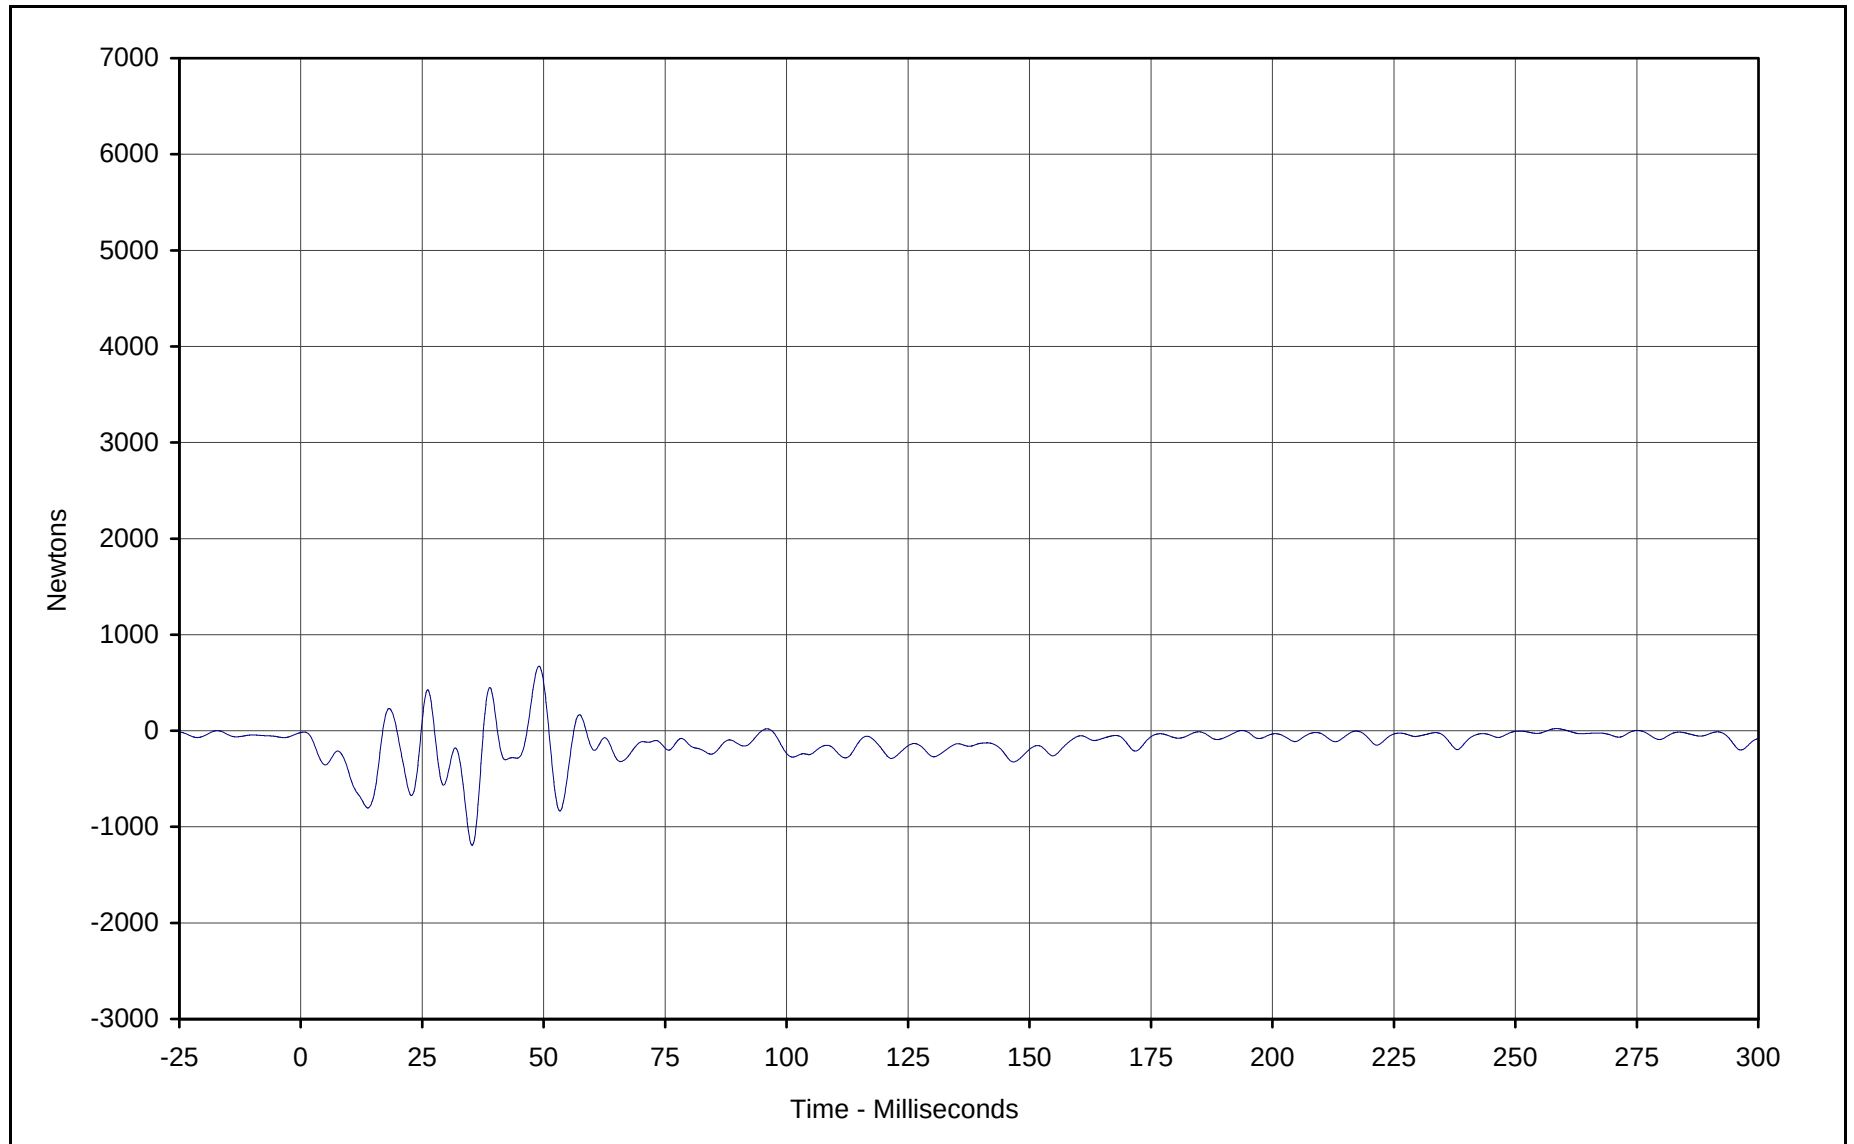


Curve Description: Barrier Force B9
Maximum Value: 672.1 at 49.0 Milliseconds
Minimum Value: -1192.2 at 35.3 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-115

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-17

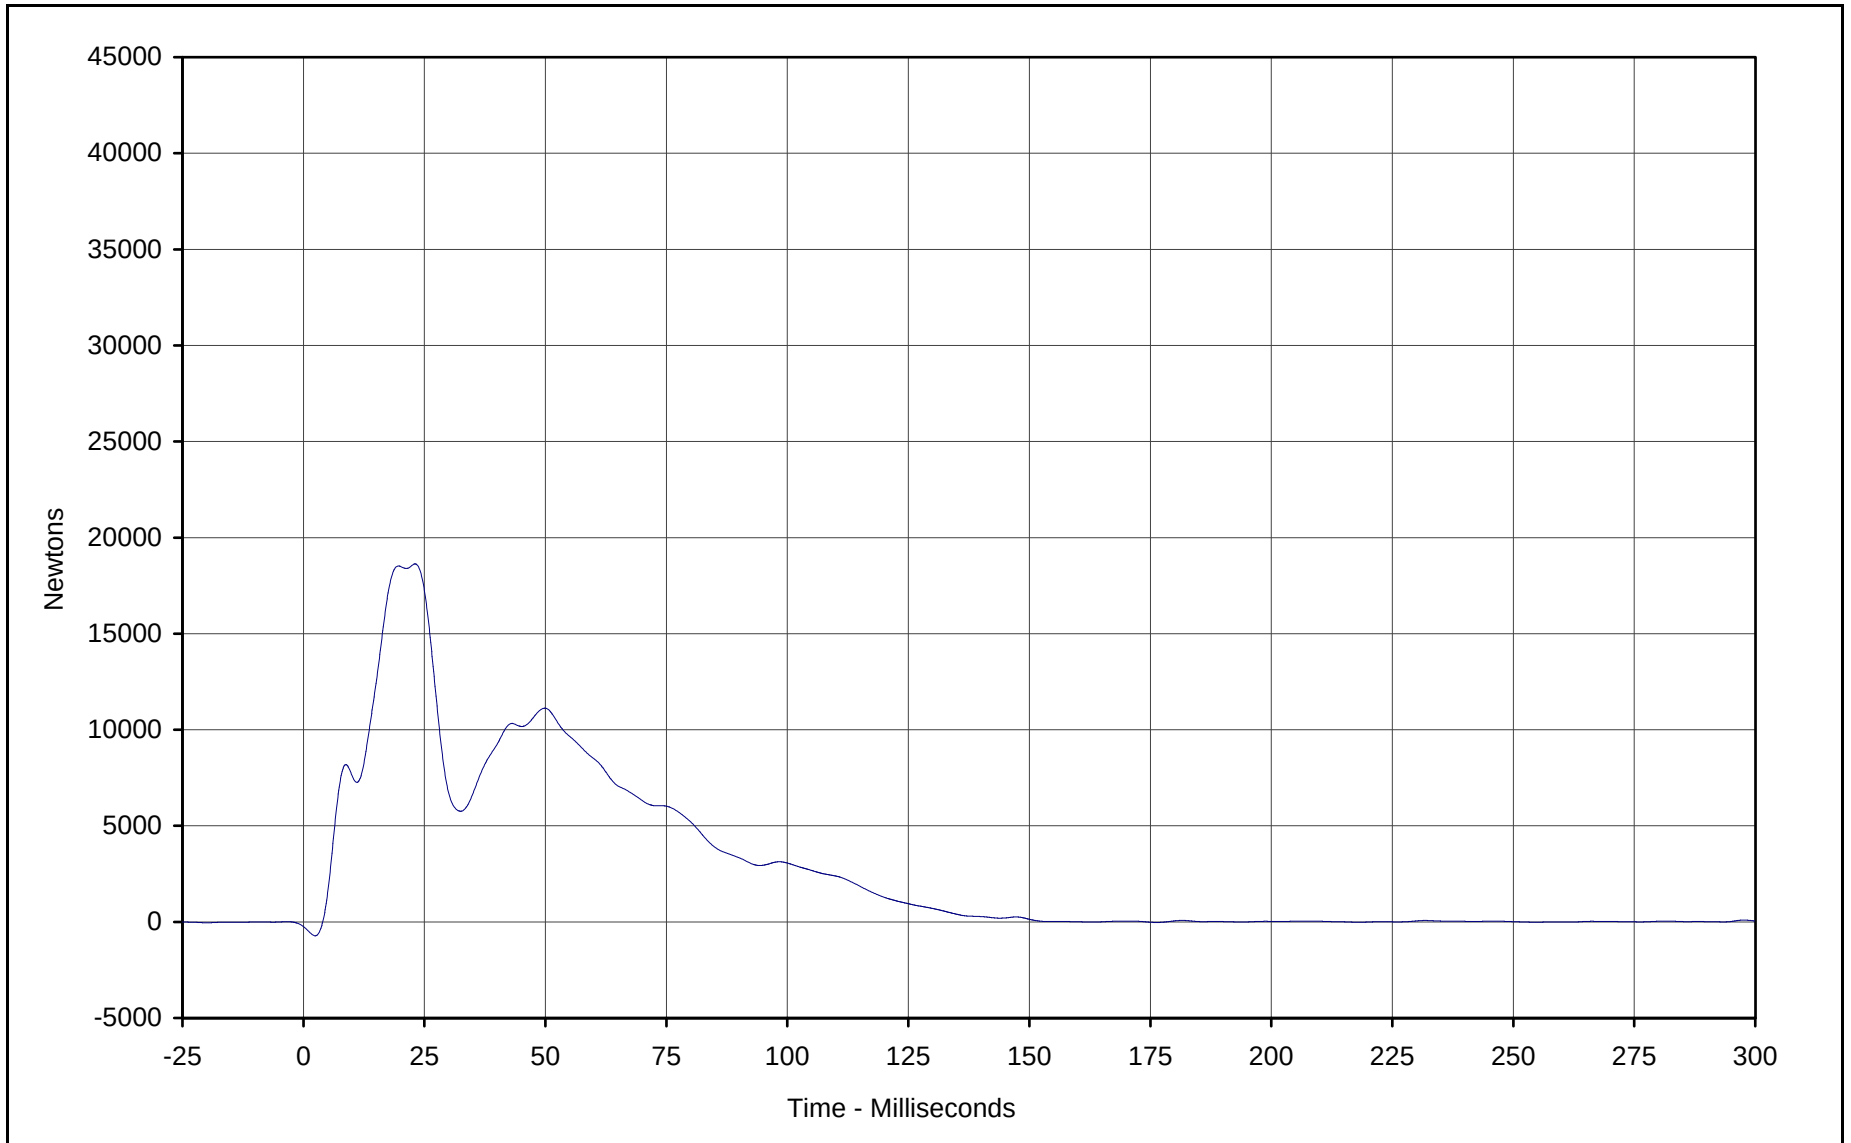


Curve Description: Barrier Force C2
Maximum Value: 18628.6 at 23.1 Milliseconds
Minimum Value: -722.8 at 2.4 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-117

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-18

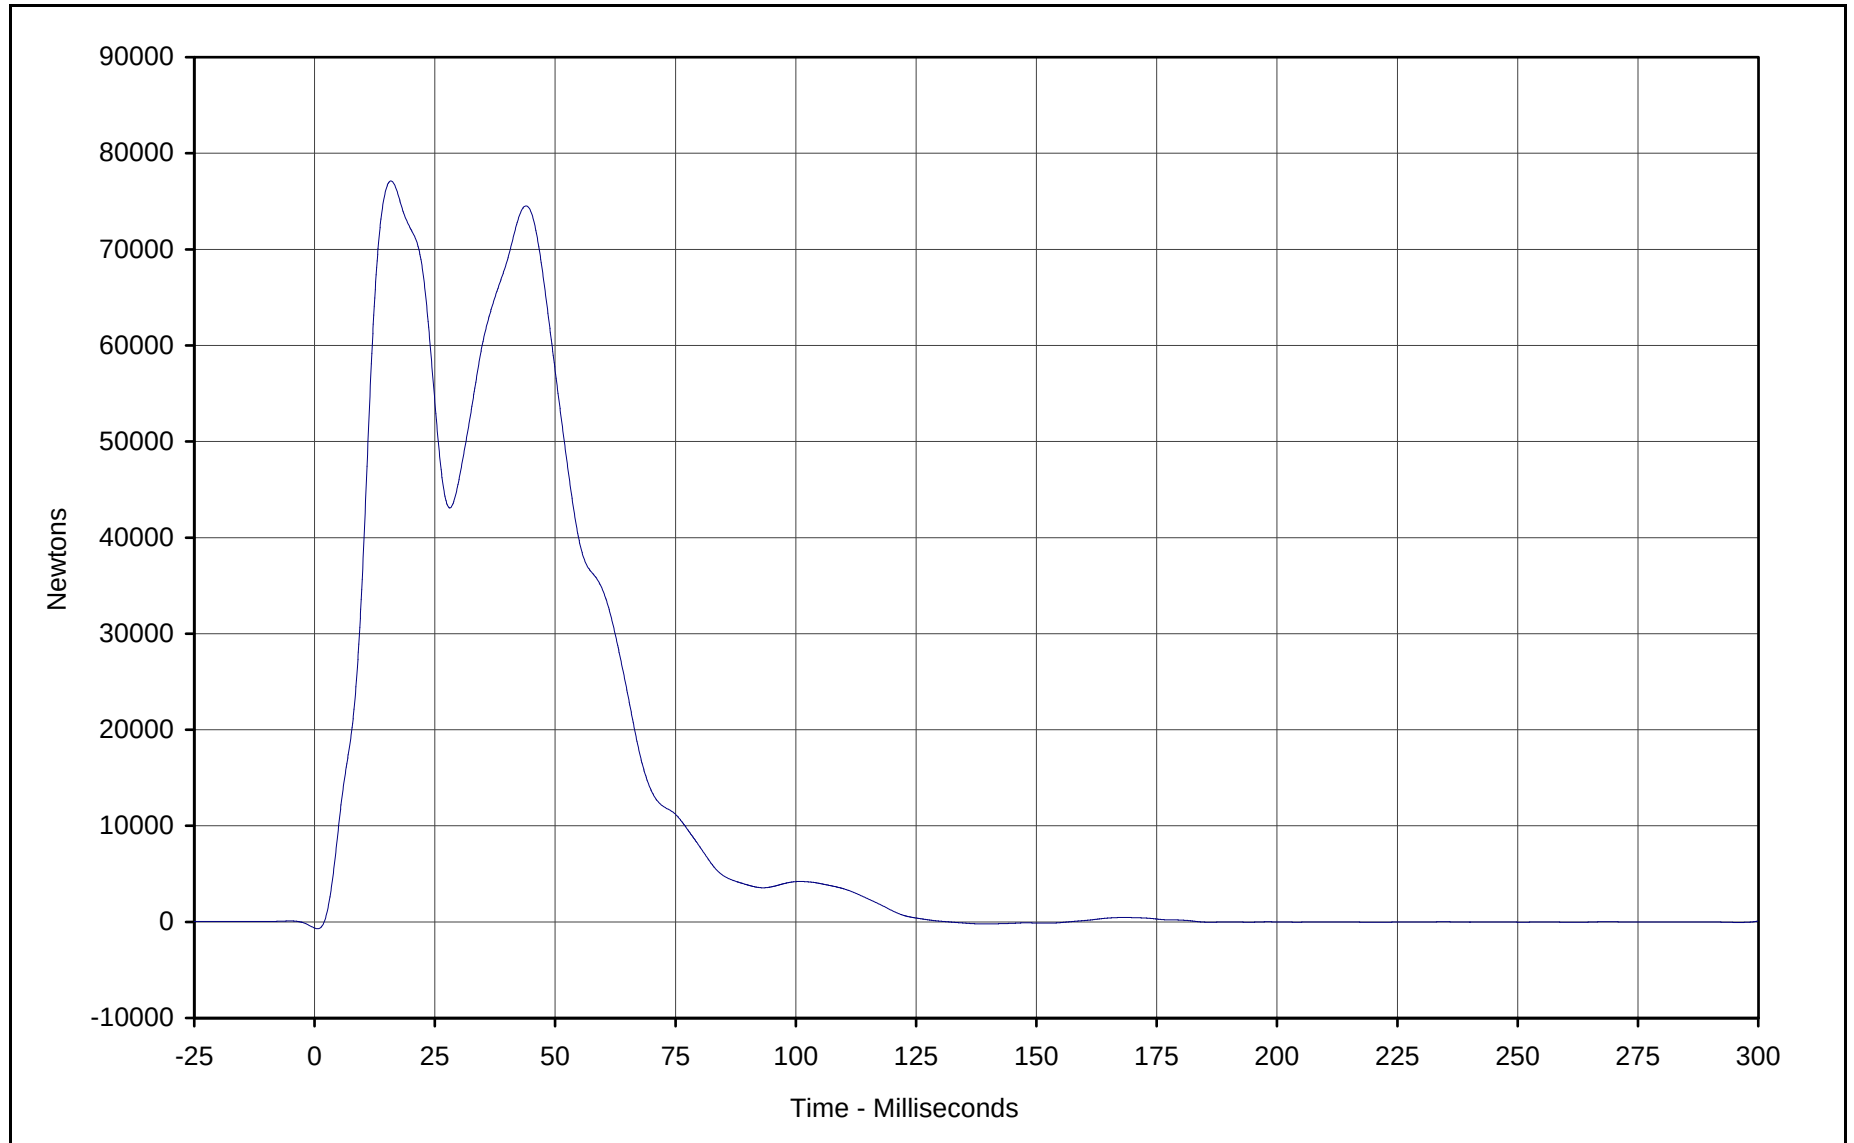


Curve Description: Barrier Force C3
Maximum Value: 77120.1 at 15.9 Milliseconds
Minimum Value: -711.8 at 0.6 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-118

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-19

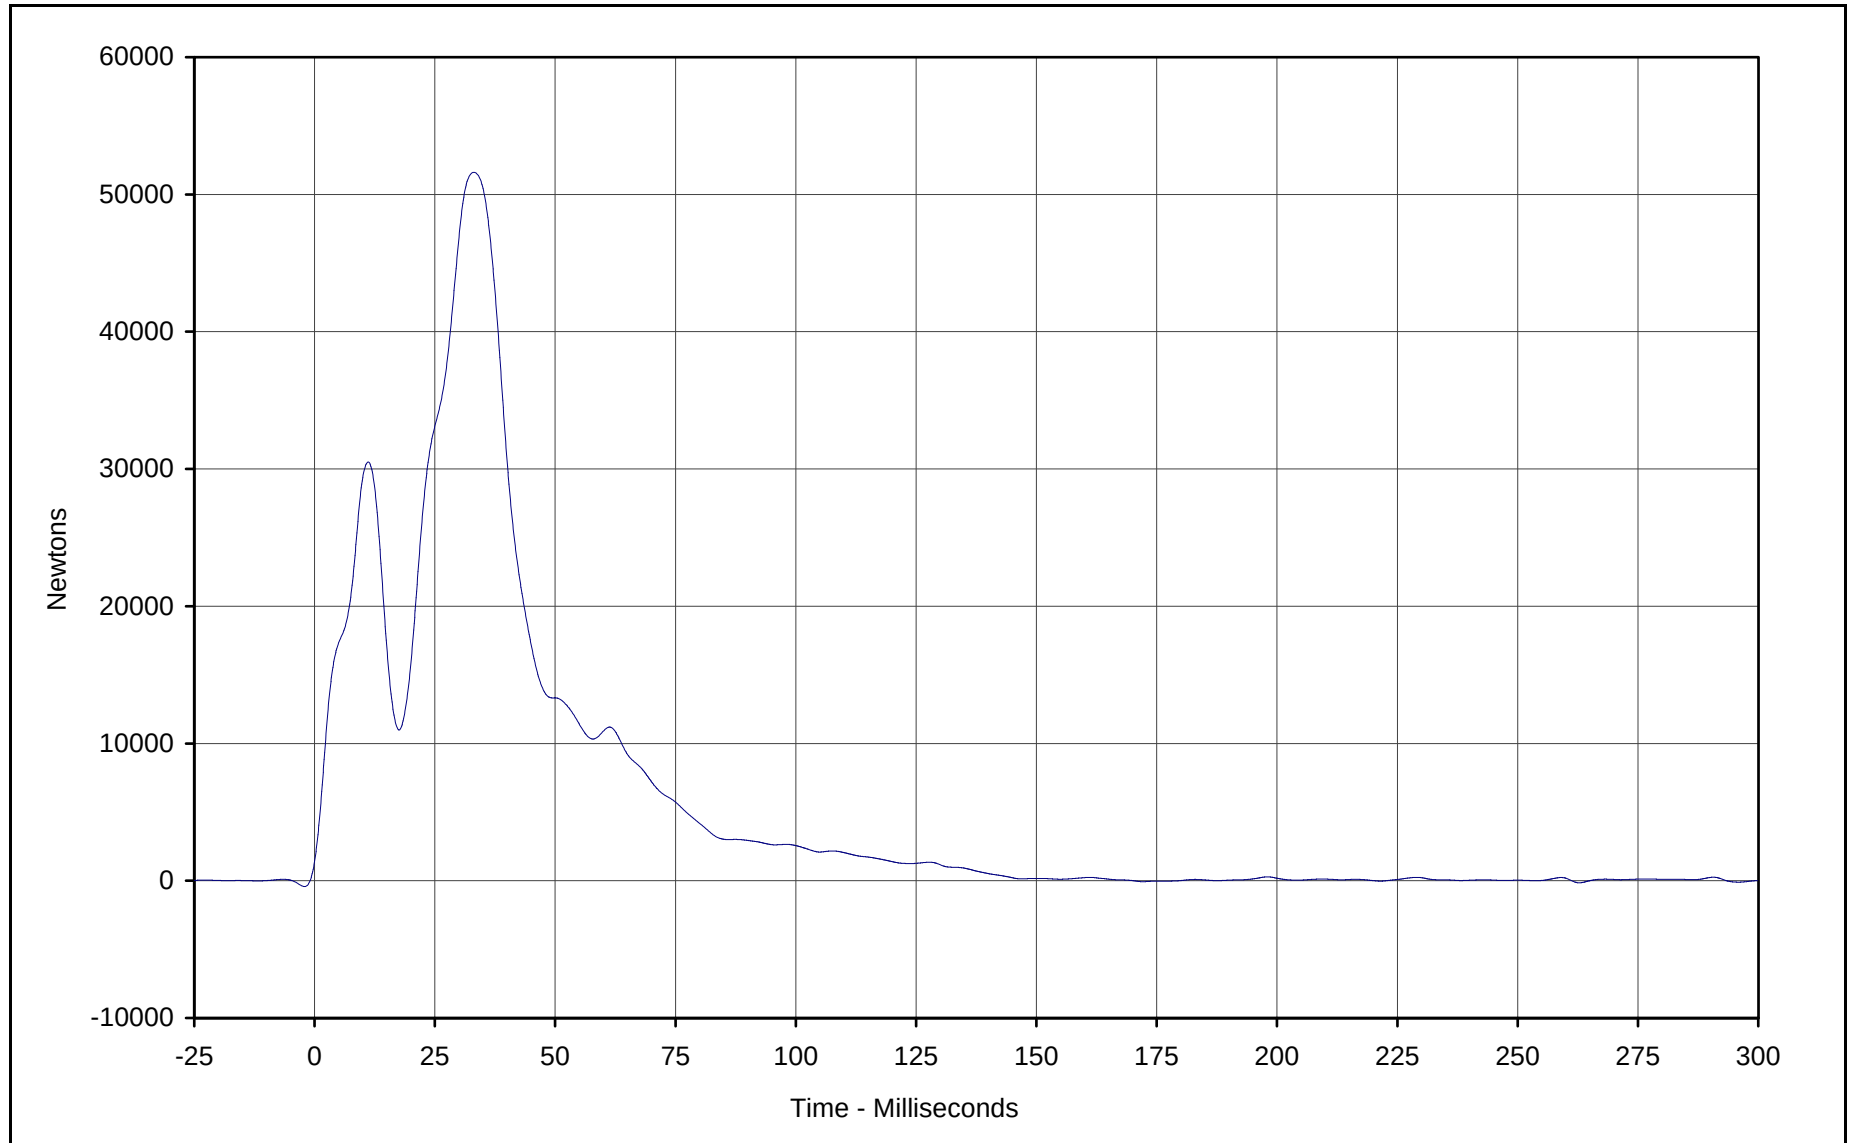

Curve Description: Barrier Force C4

Maximum Value: 51613.1 at 33.1 Milliseconds

Minimum Value: -155.0 at 262.8 Milliseconds

SAE Filter Class: 60

Date of Test: 02/13/01

Curve Number: FIL-119


Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-20

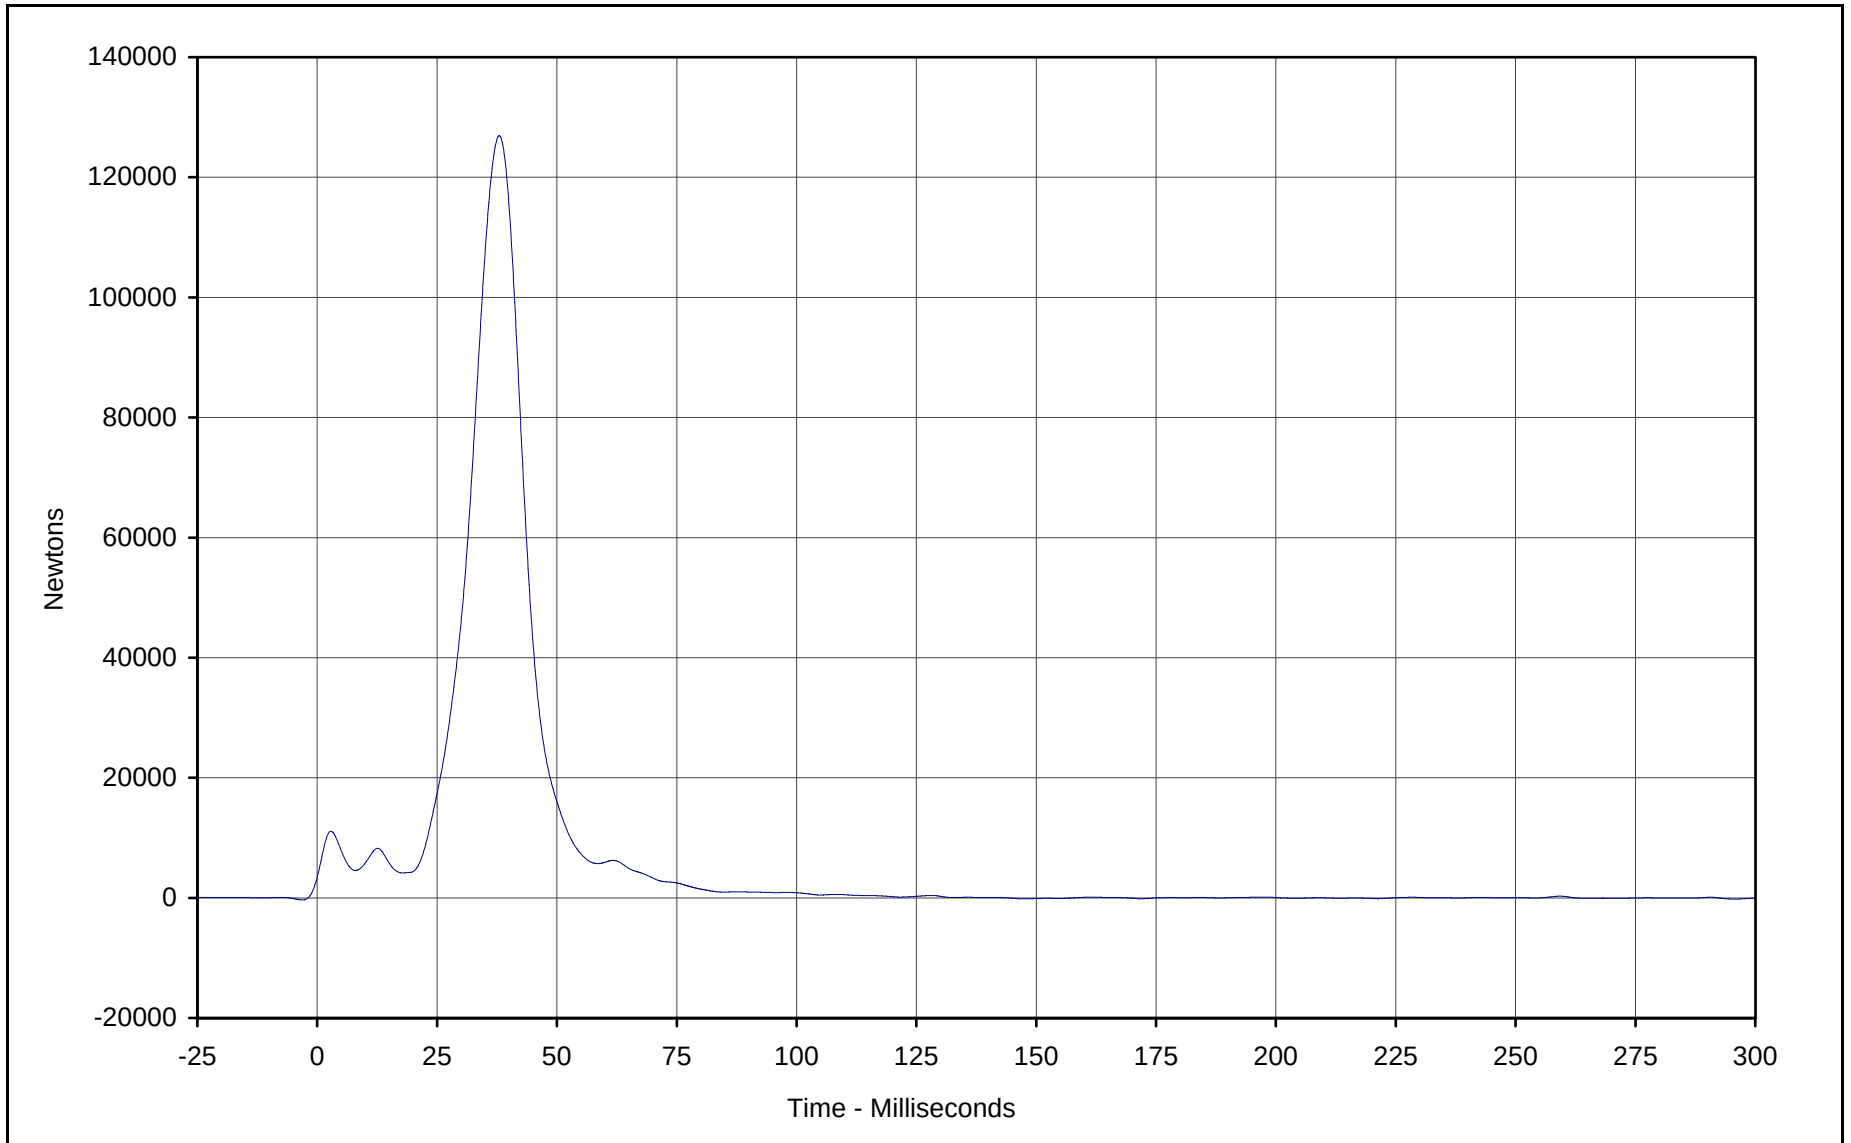


Curve Description: Barrier Force C5
Maximum Value: 126925.6 at 38.0 Milliseconds
Minimum Value: -189.3 at 295.9 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-120

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-21

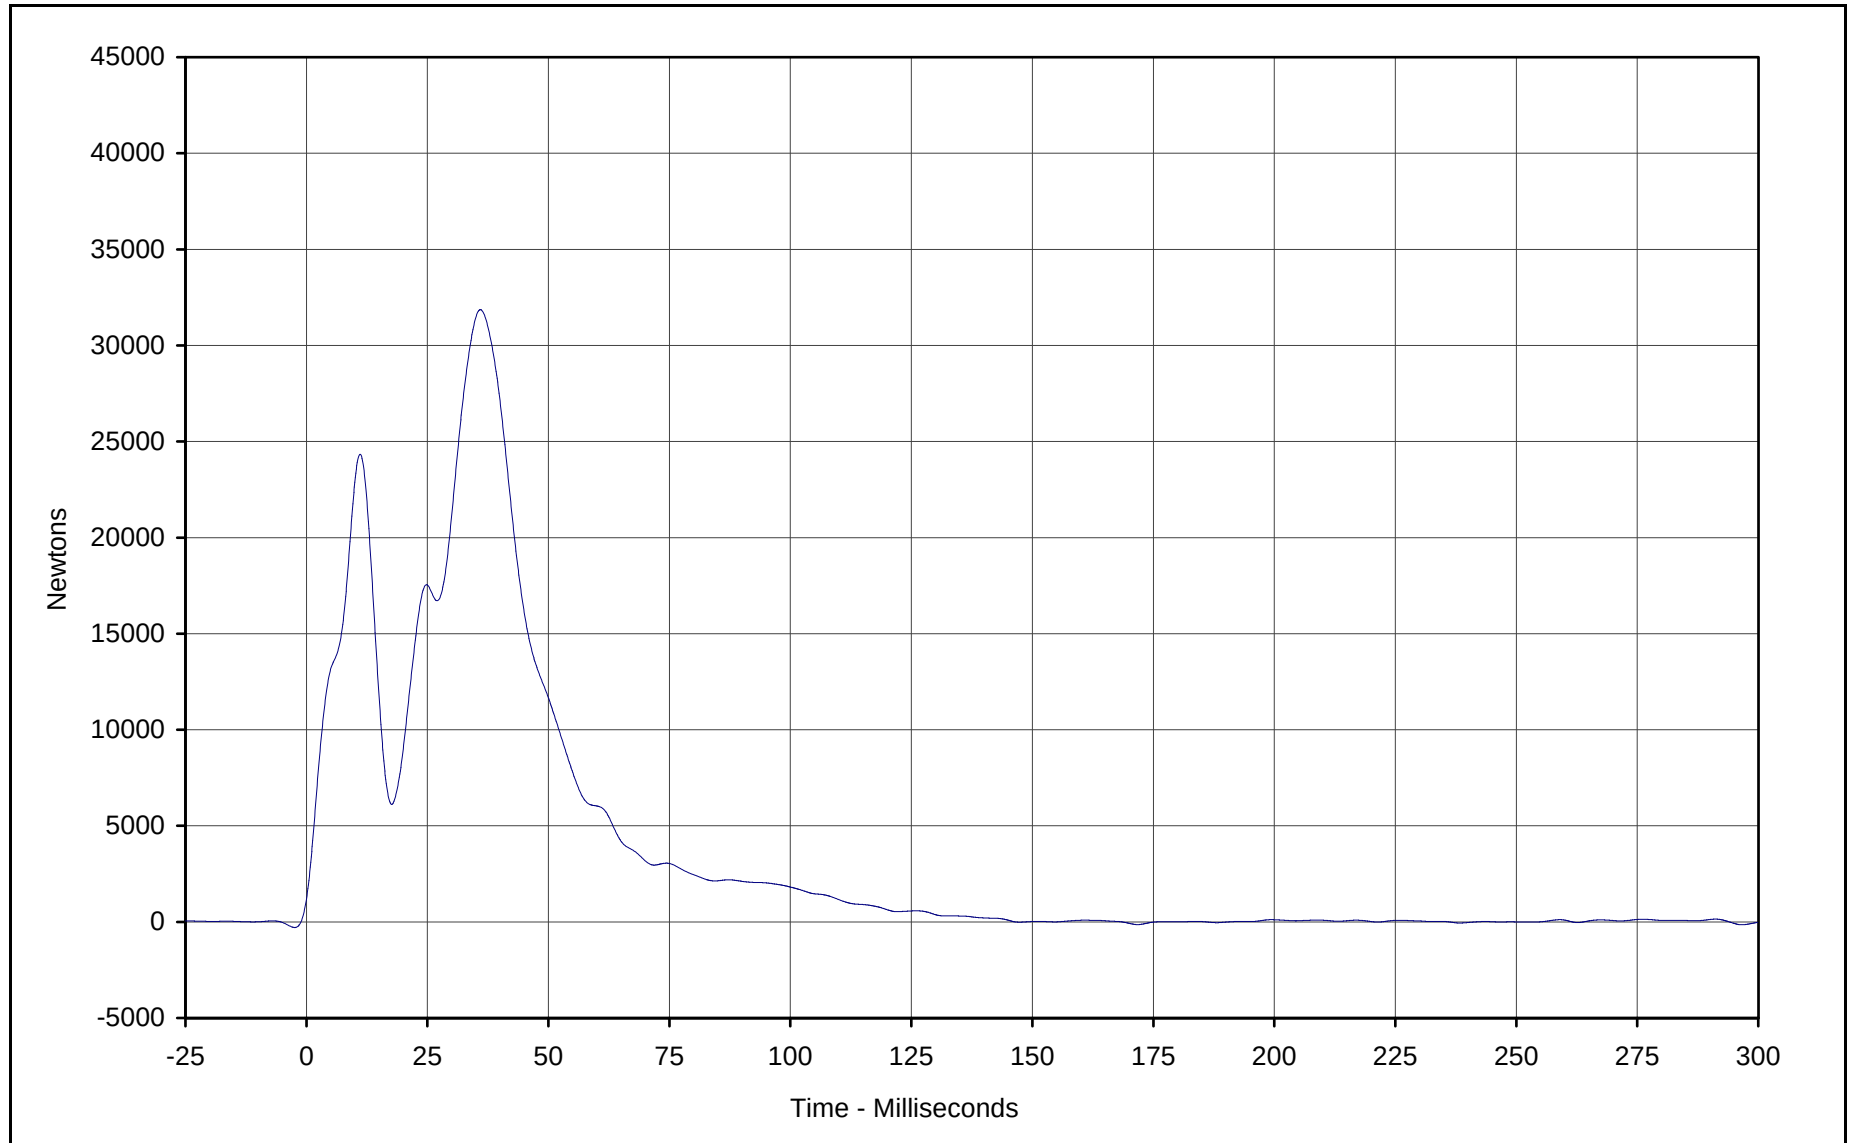


Curve Description: Barrier Force C6
Maximum Value: 31863.3 at 35.9 Milliseconds
Minimum Value: -148.9 at 296.6 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-121

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-22

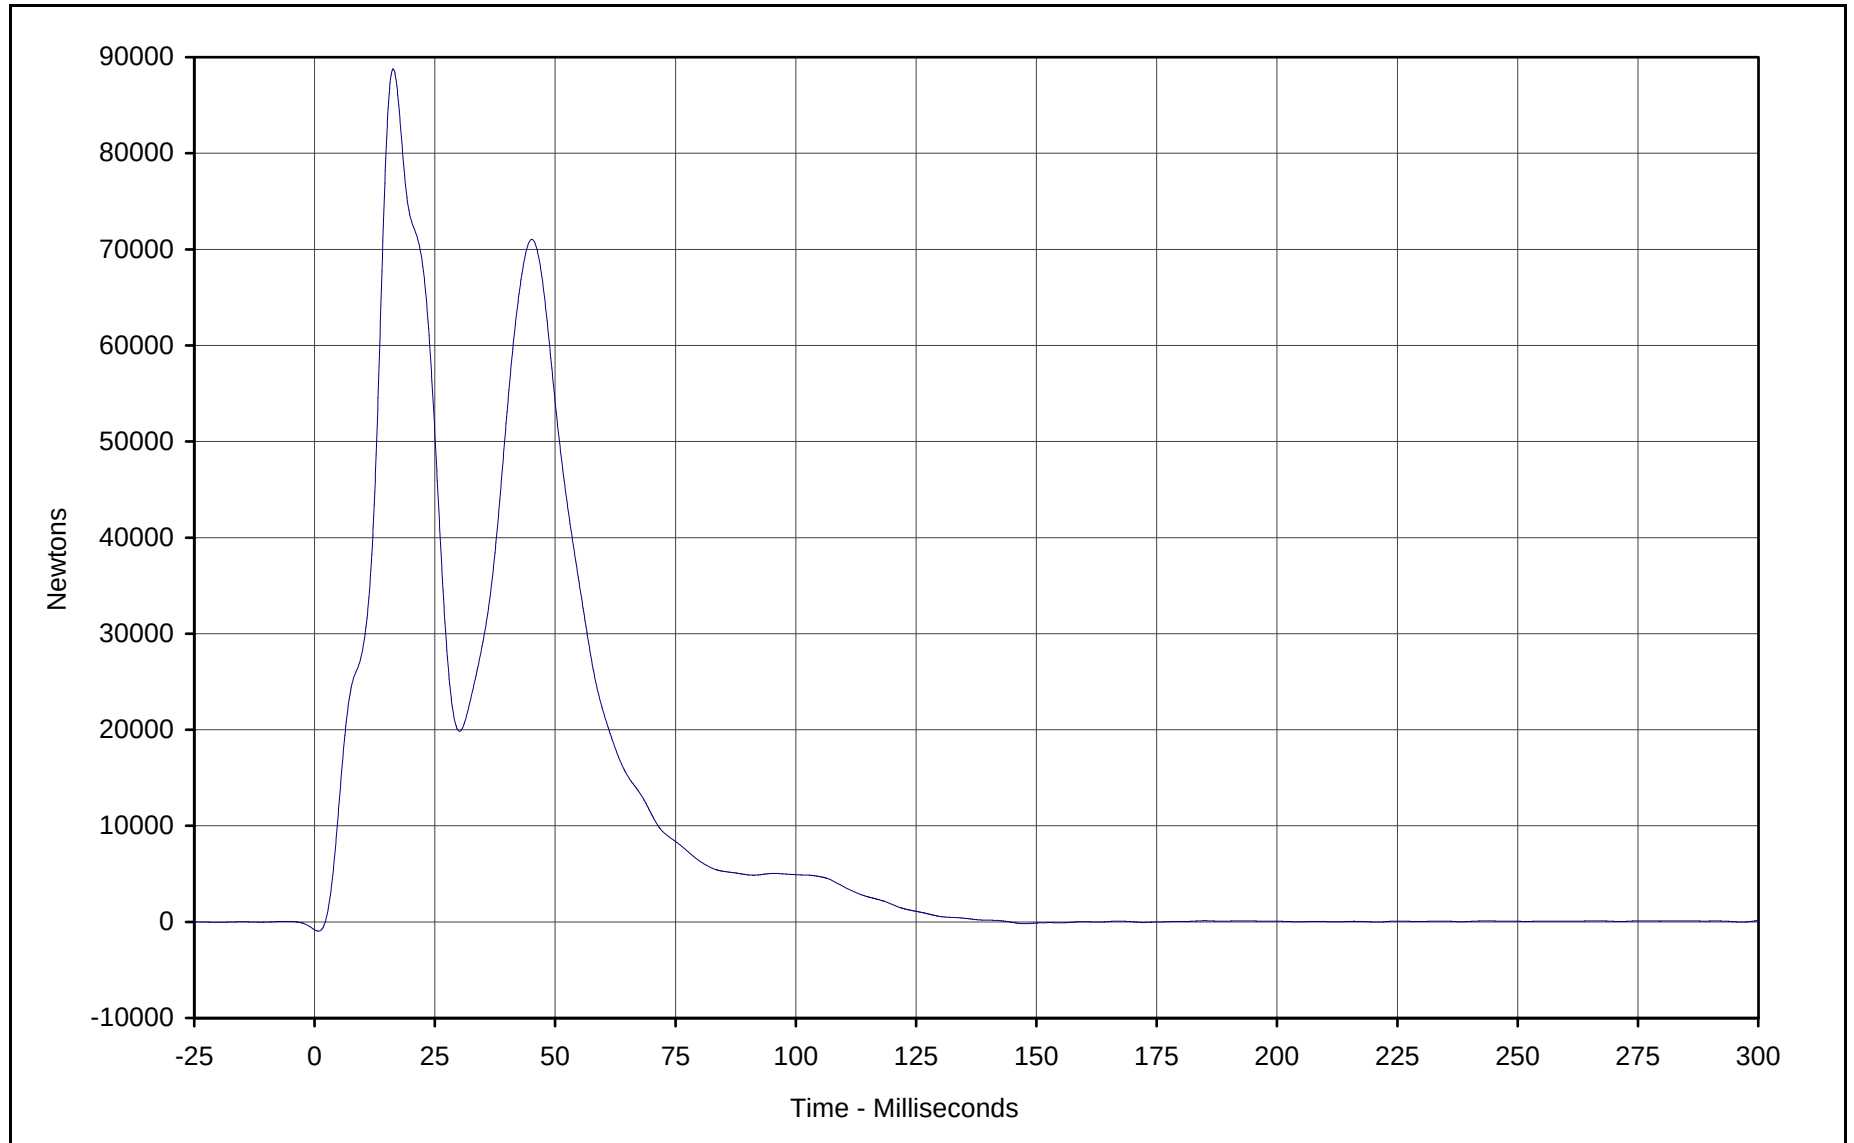


Curve Description: Barrier Force C7
Maximum Value: 88779.5 at 16.3 Milliseconds
Minimum Value: -959.4 at 0.8 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-122

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-23

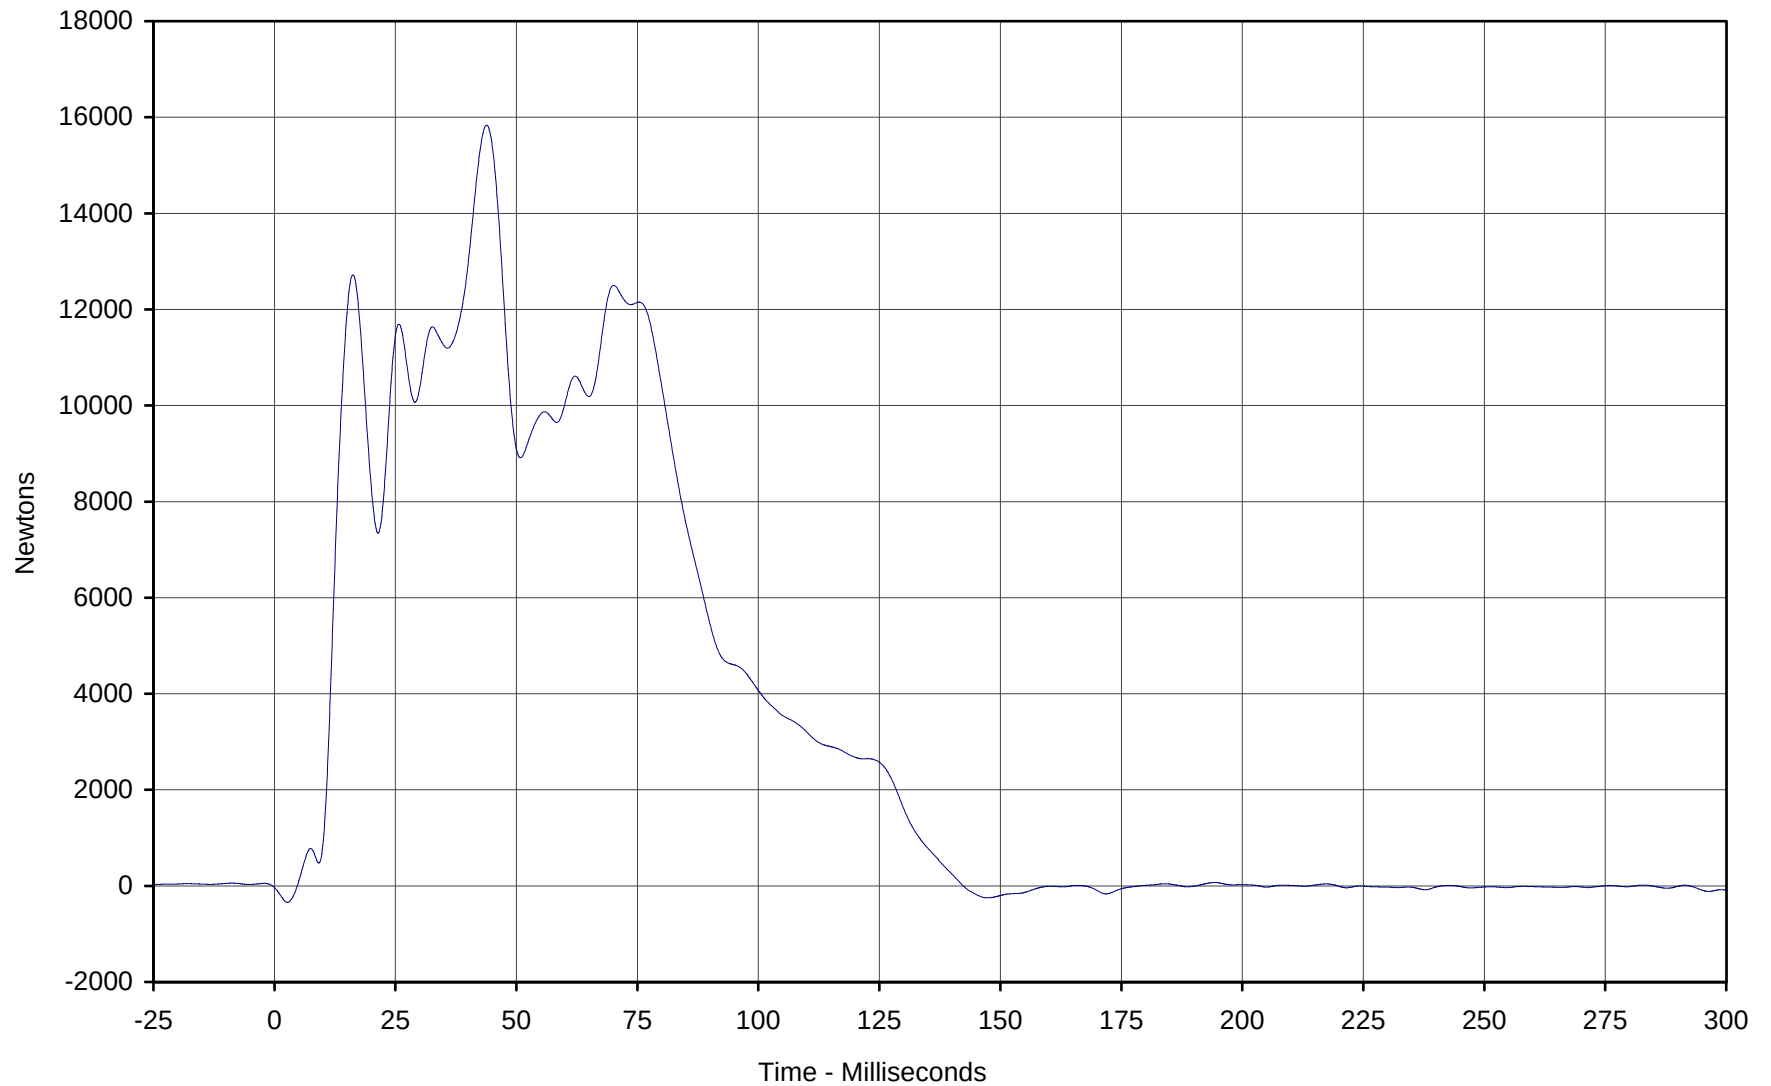


Curve Description: Barrier Force C8
Maximum Value: 15837.5 at 43.8 Milliseconds
Minimum Value: -343.7 at 2.7 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-123

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-24

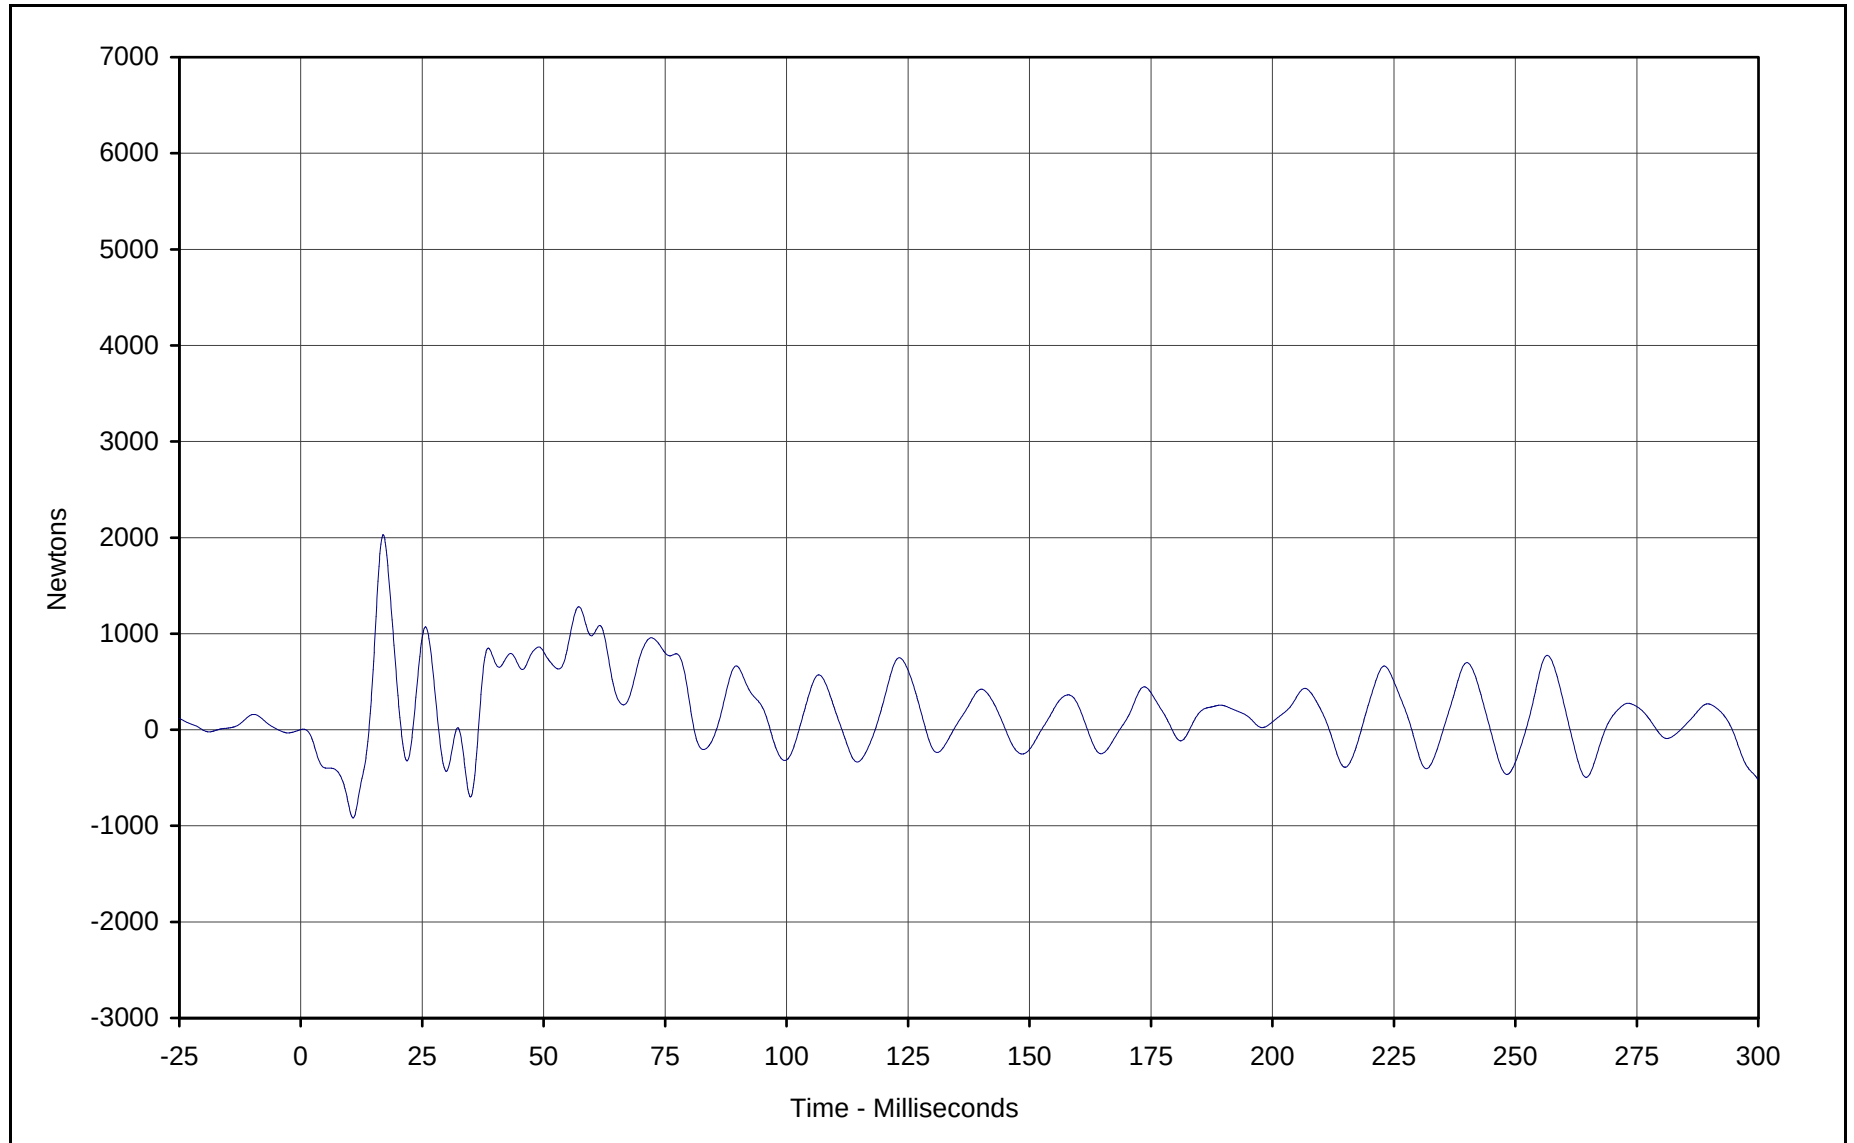


Curve Description: Barrier Force C9
Maximum Value: 2029.2 at 17.0 Milliseconds
Minimum Value: -917.1 at 10.8 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: FIL-124

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-25

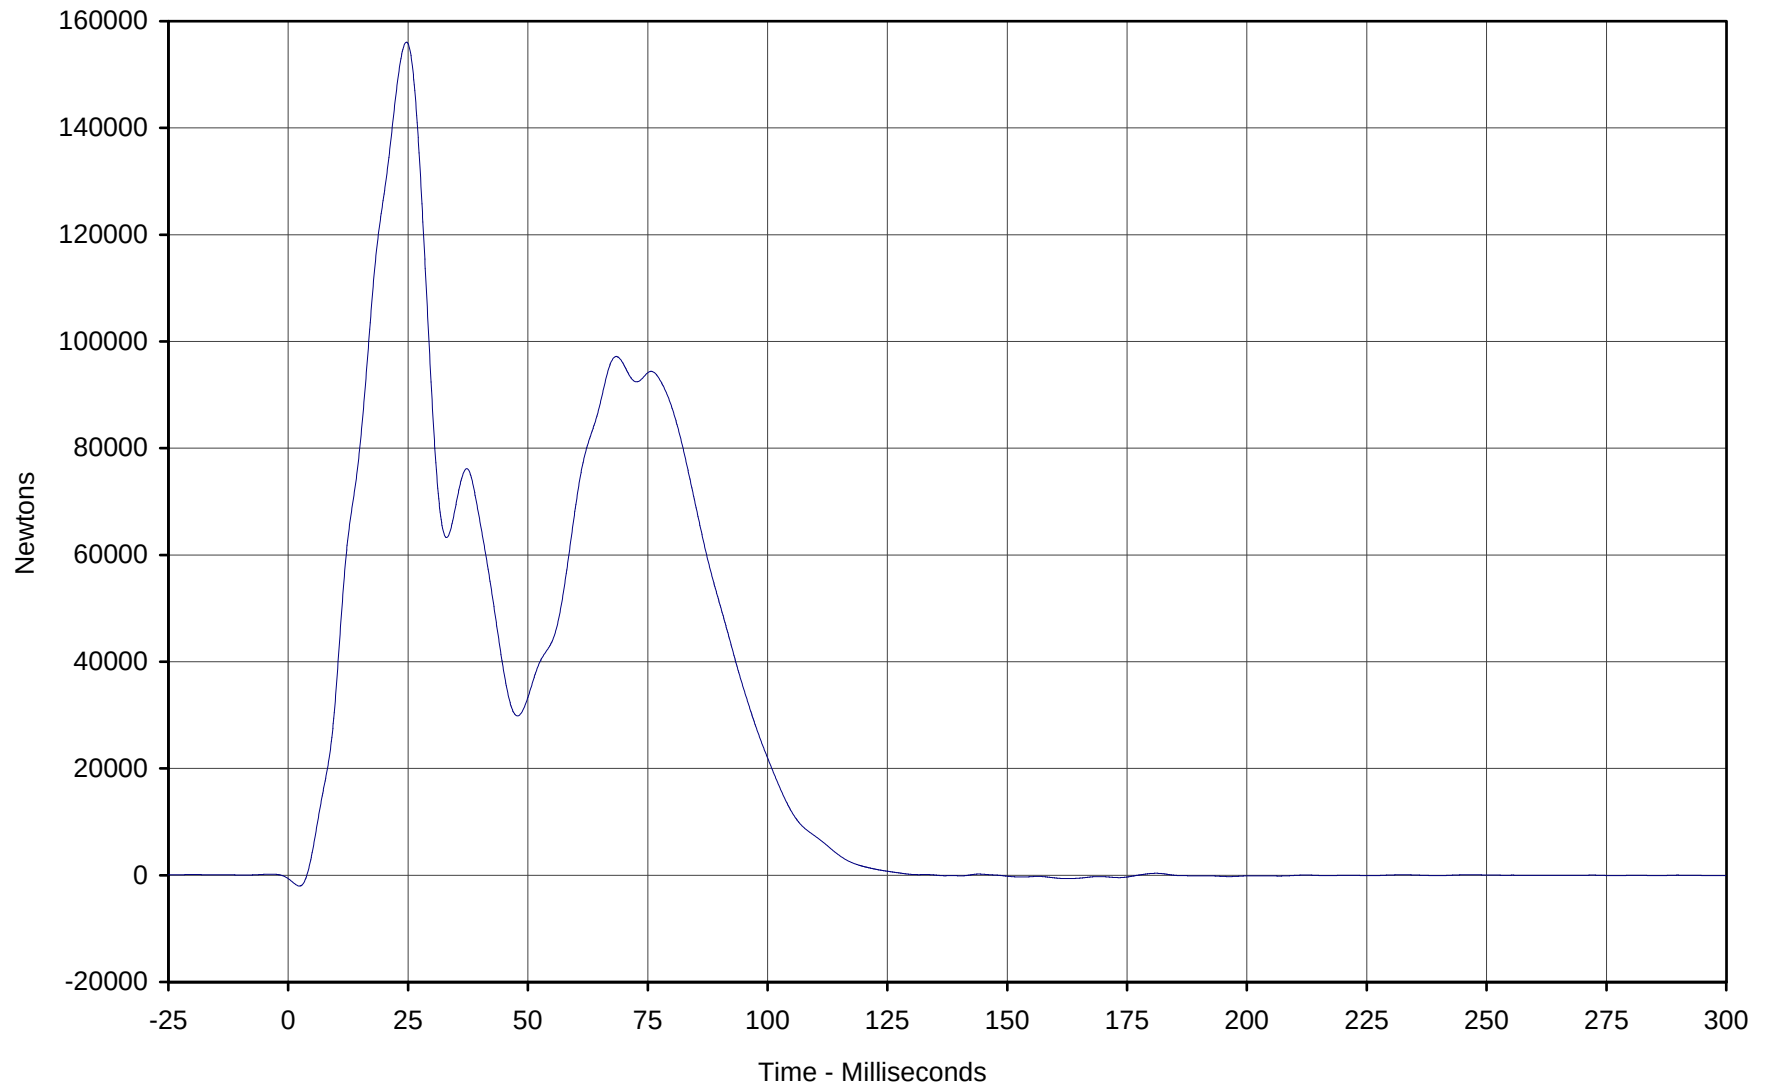


Curve Description: Barrier Force Sum Group 1
Maximum Value: 156076.7 at 24.7 Milliseconds
Minimum Value: -2032.4 at 2.3 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: SUM-001

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

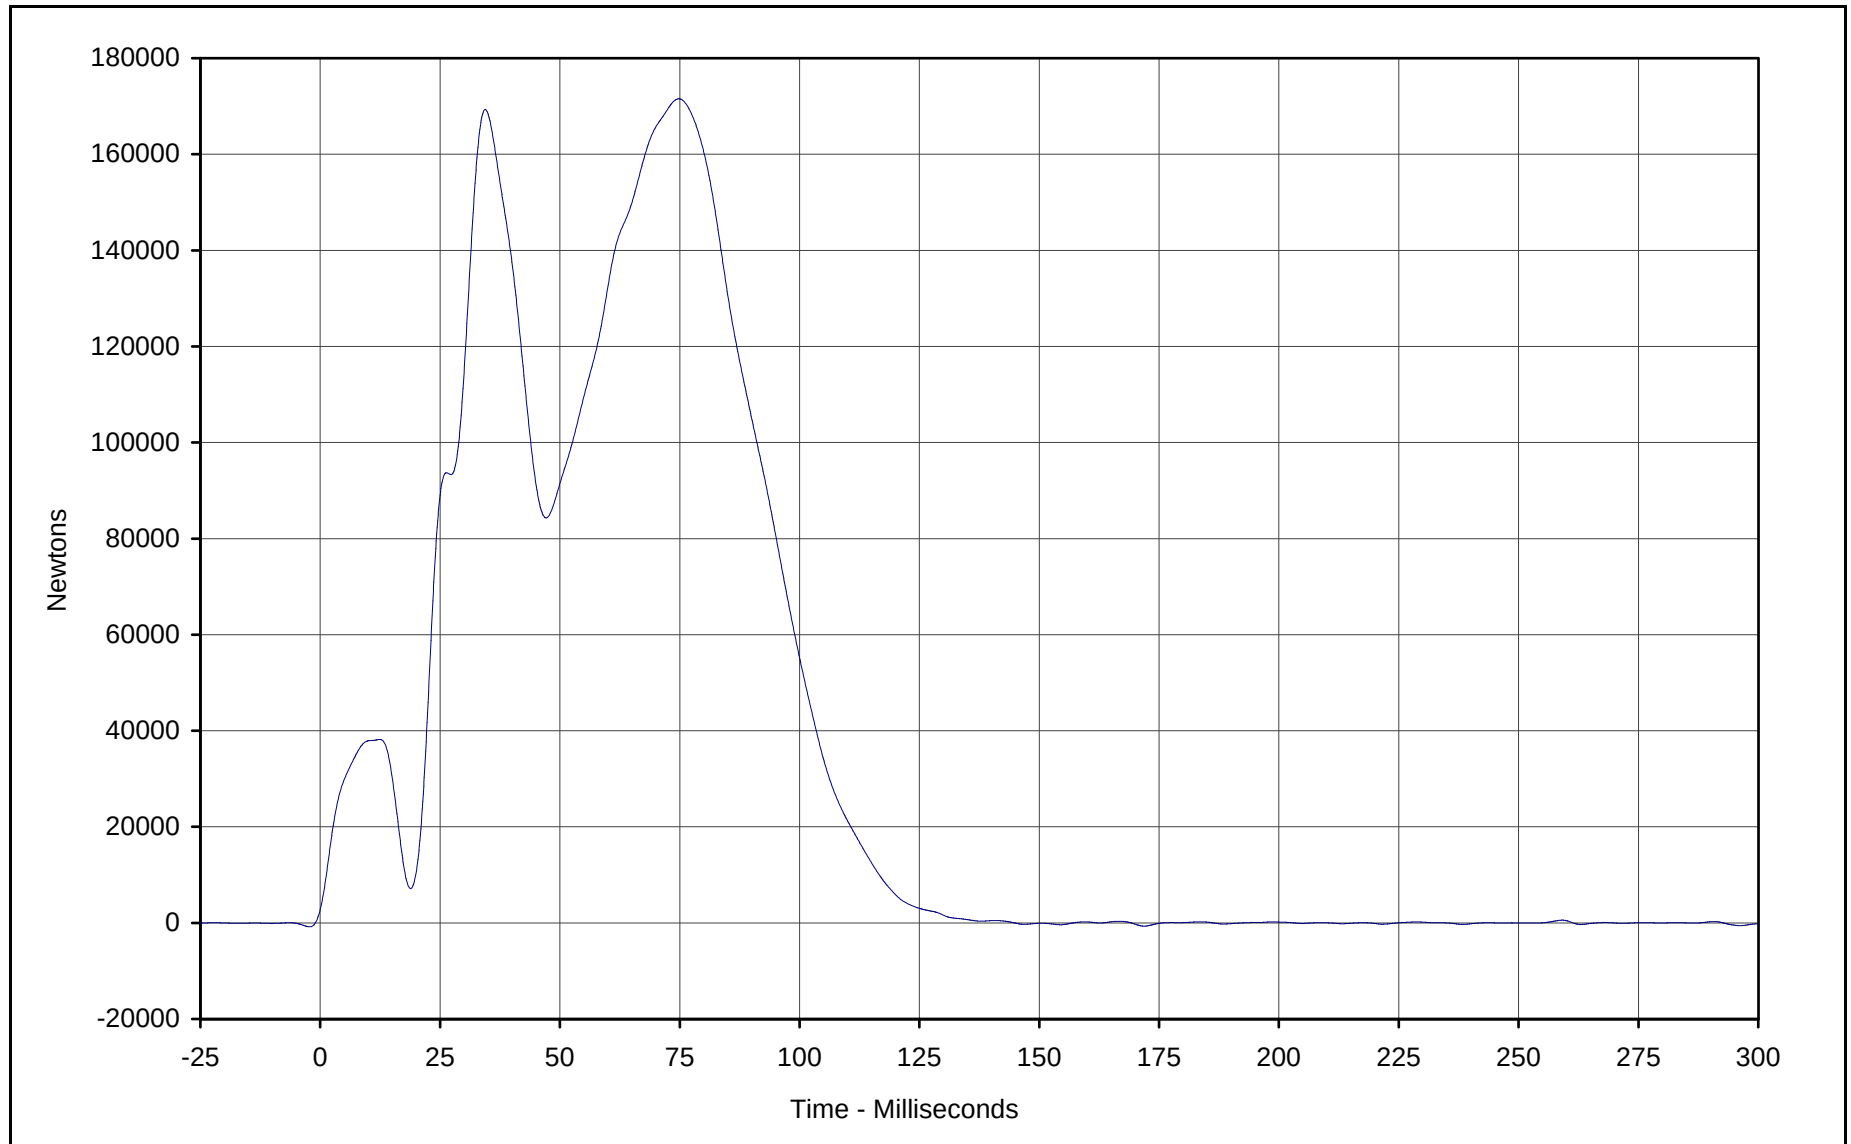


Curve Description: Barrier Force Sum Group 2
Maximum Value: 171550.1 at 74.8 Milliseconds
Minimum Value: -674.0 at 171.9 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: SUM-002

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



C-27

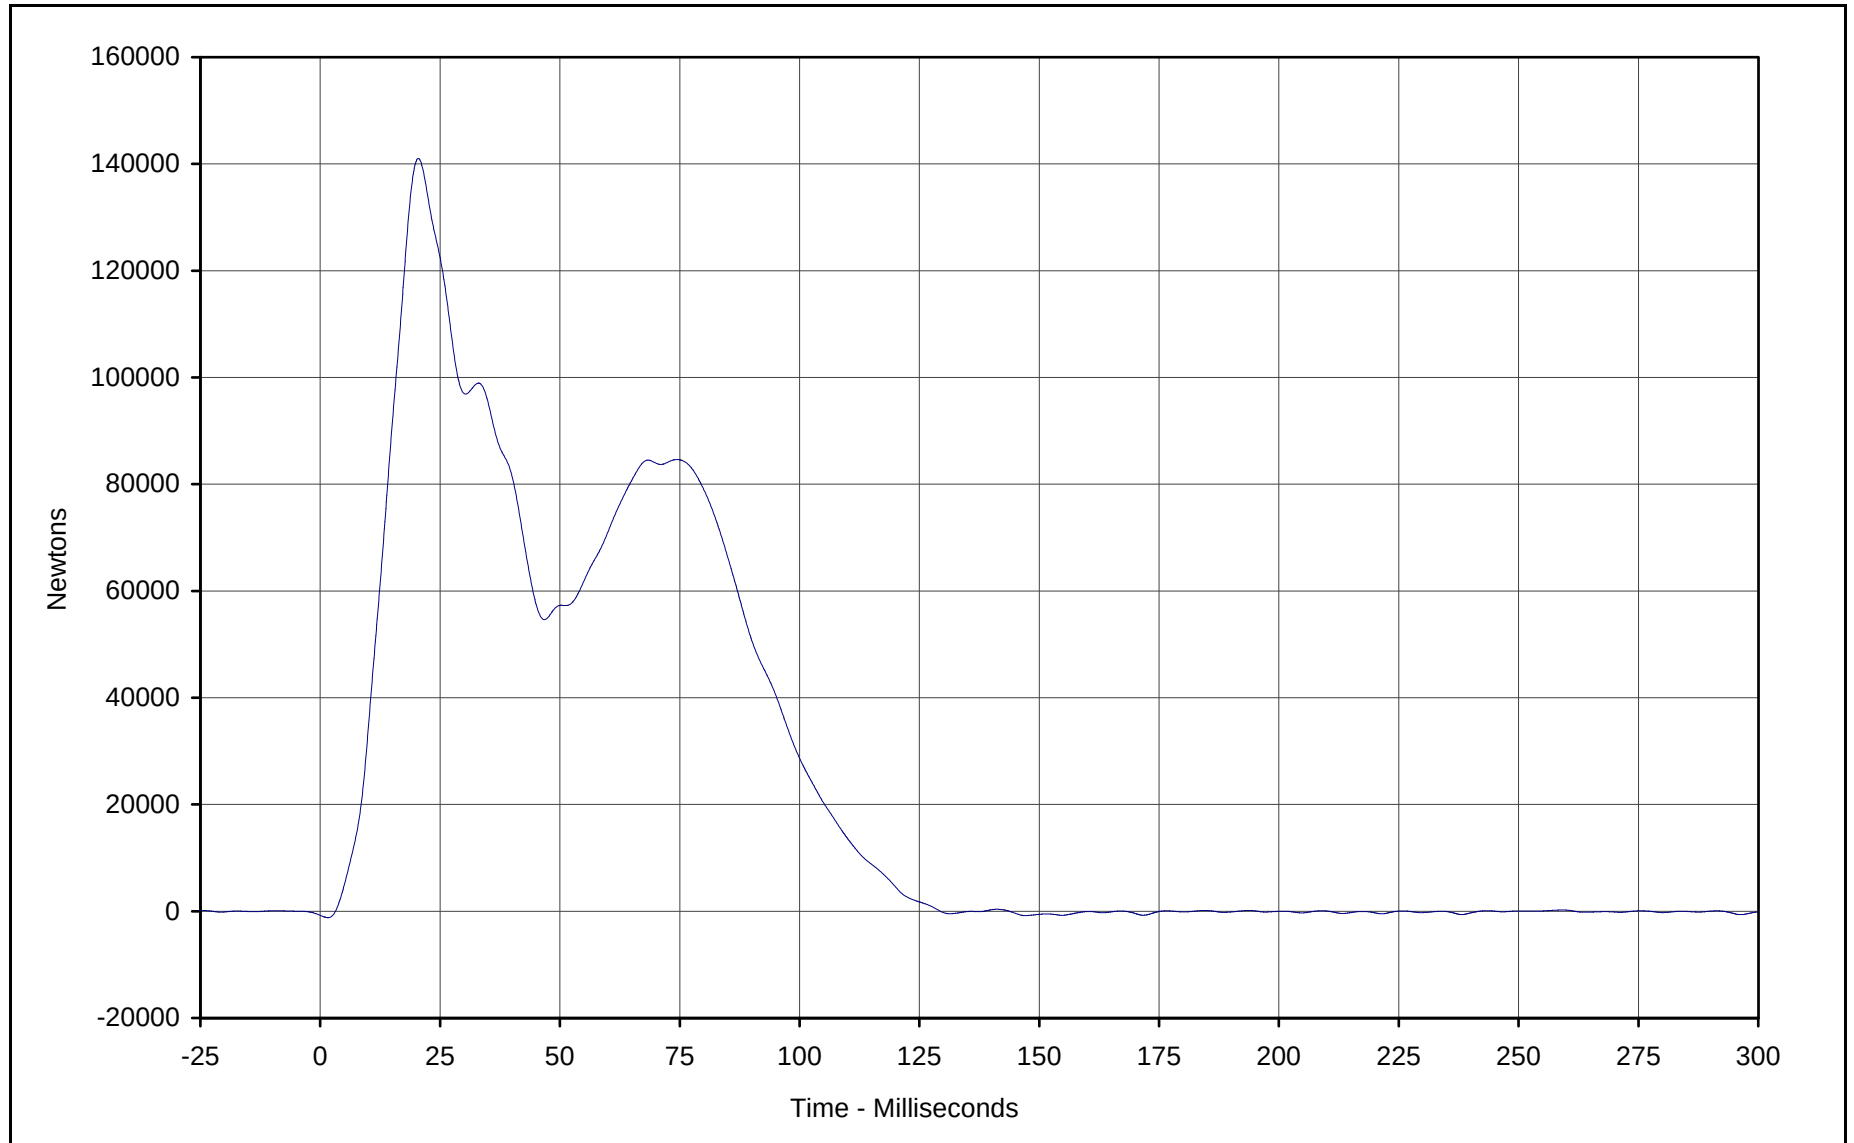


Curve Description: Barrier Force Sum Group 3
Maximum Value: 141028.1 at 20.5 Milliseconds
Minimum Value: -1198.7 at 1.6 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: SUM-003

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

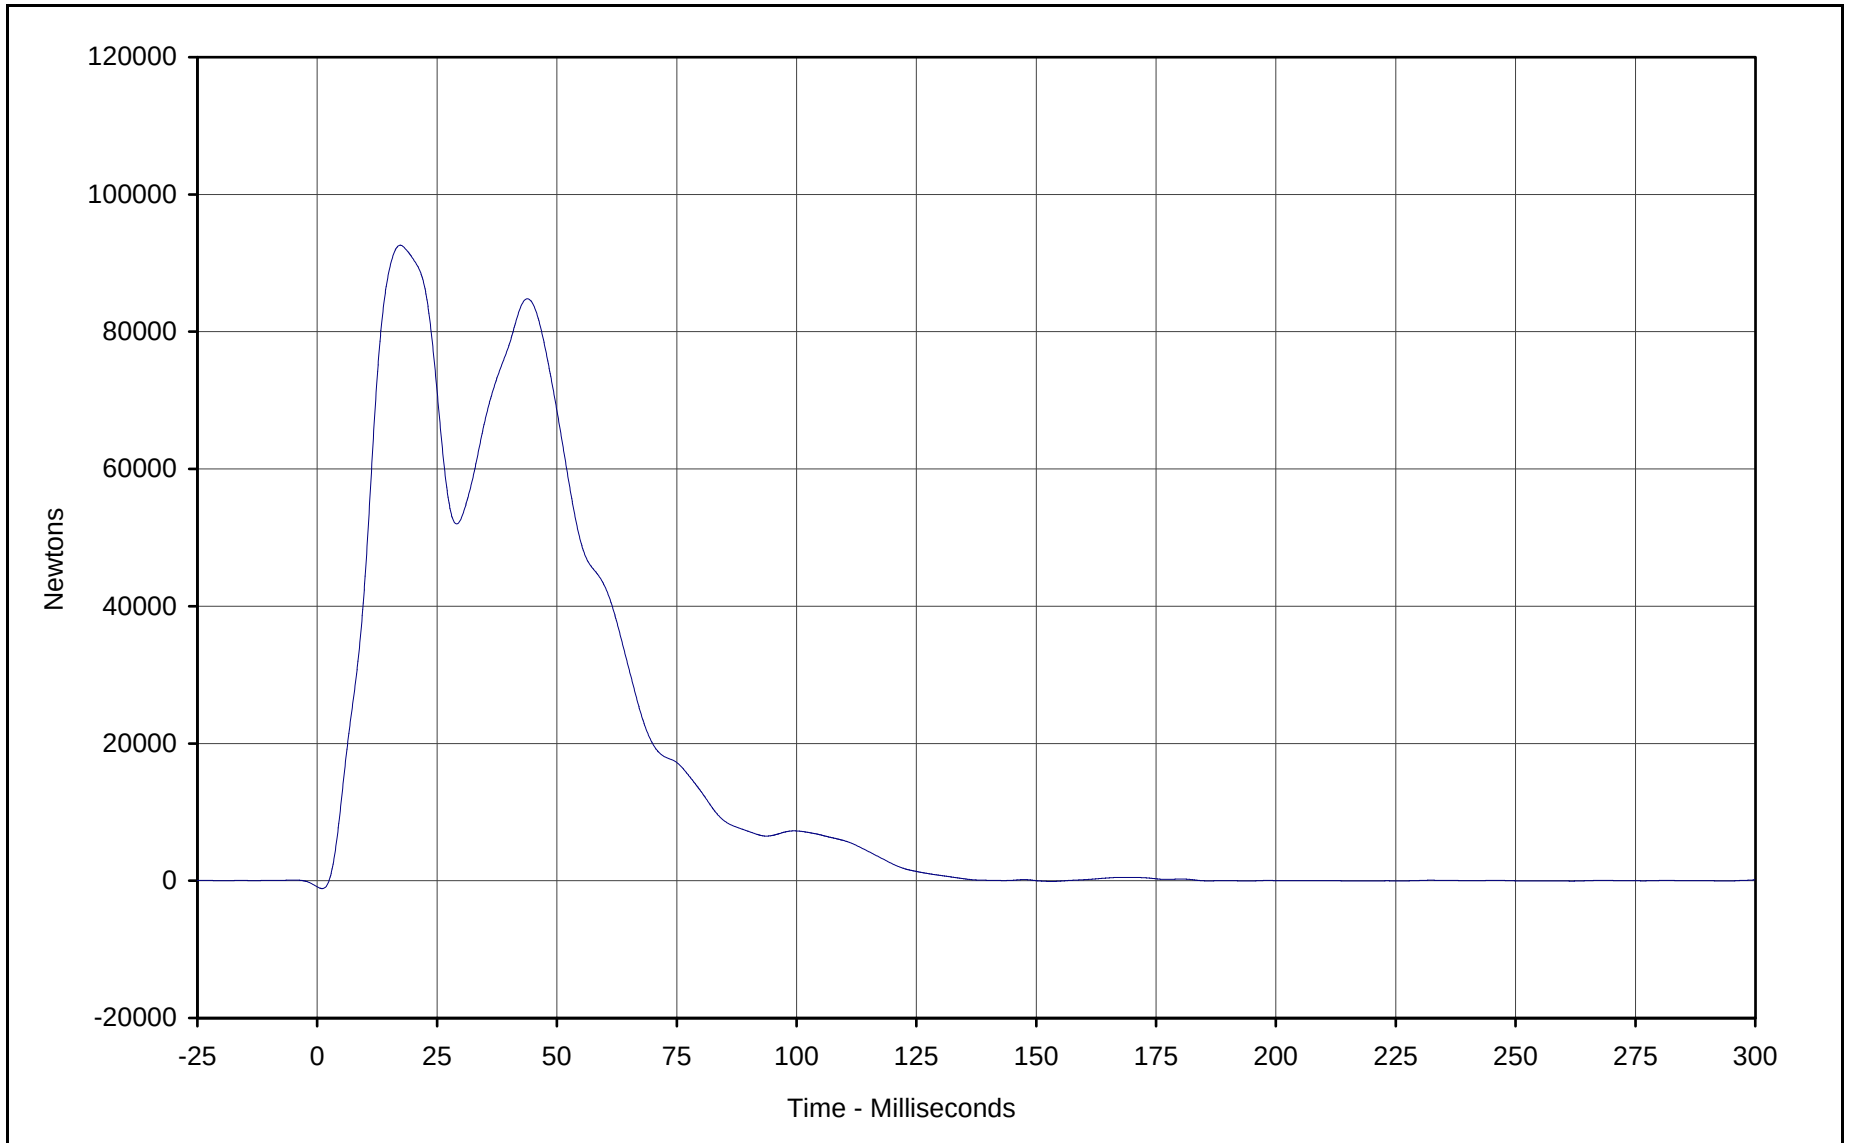


Curve Description: Barrier Force Sum Group 4
Maximum Value: 92606.7 at 17.3 Milliseconds
Minimum Value: -1143.5 at 1.0 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: SUM-004

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



C-29

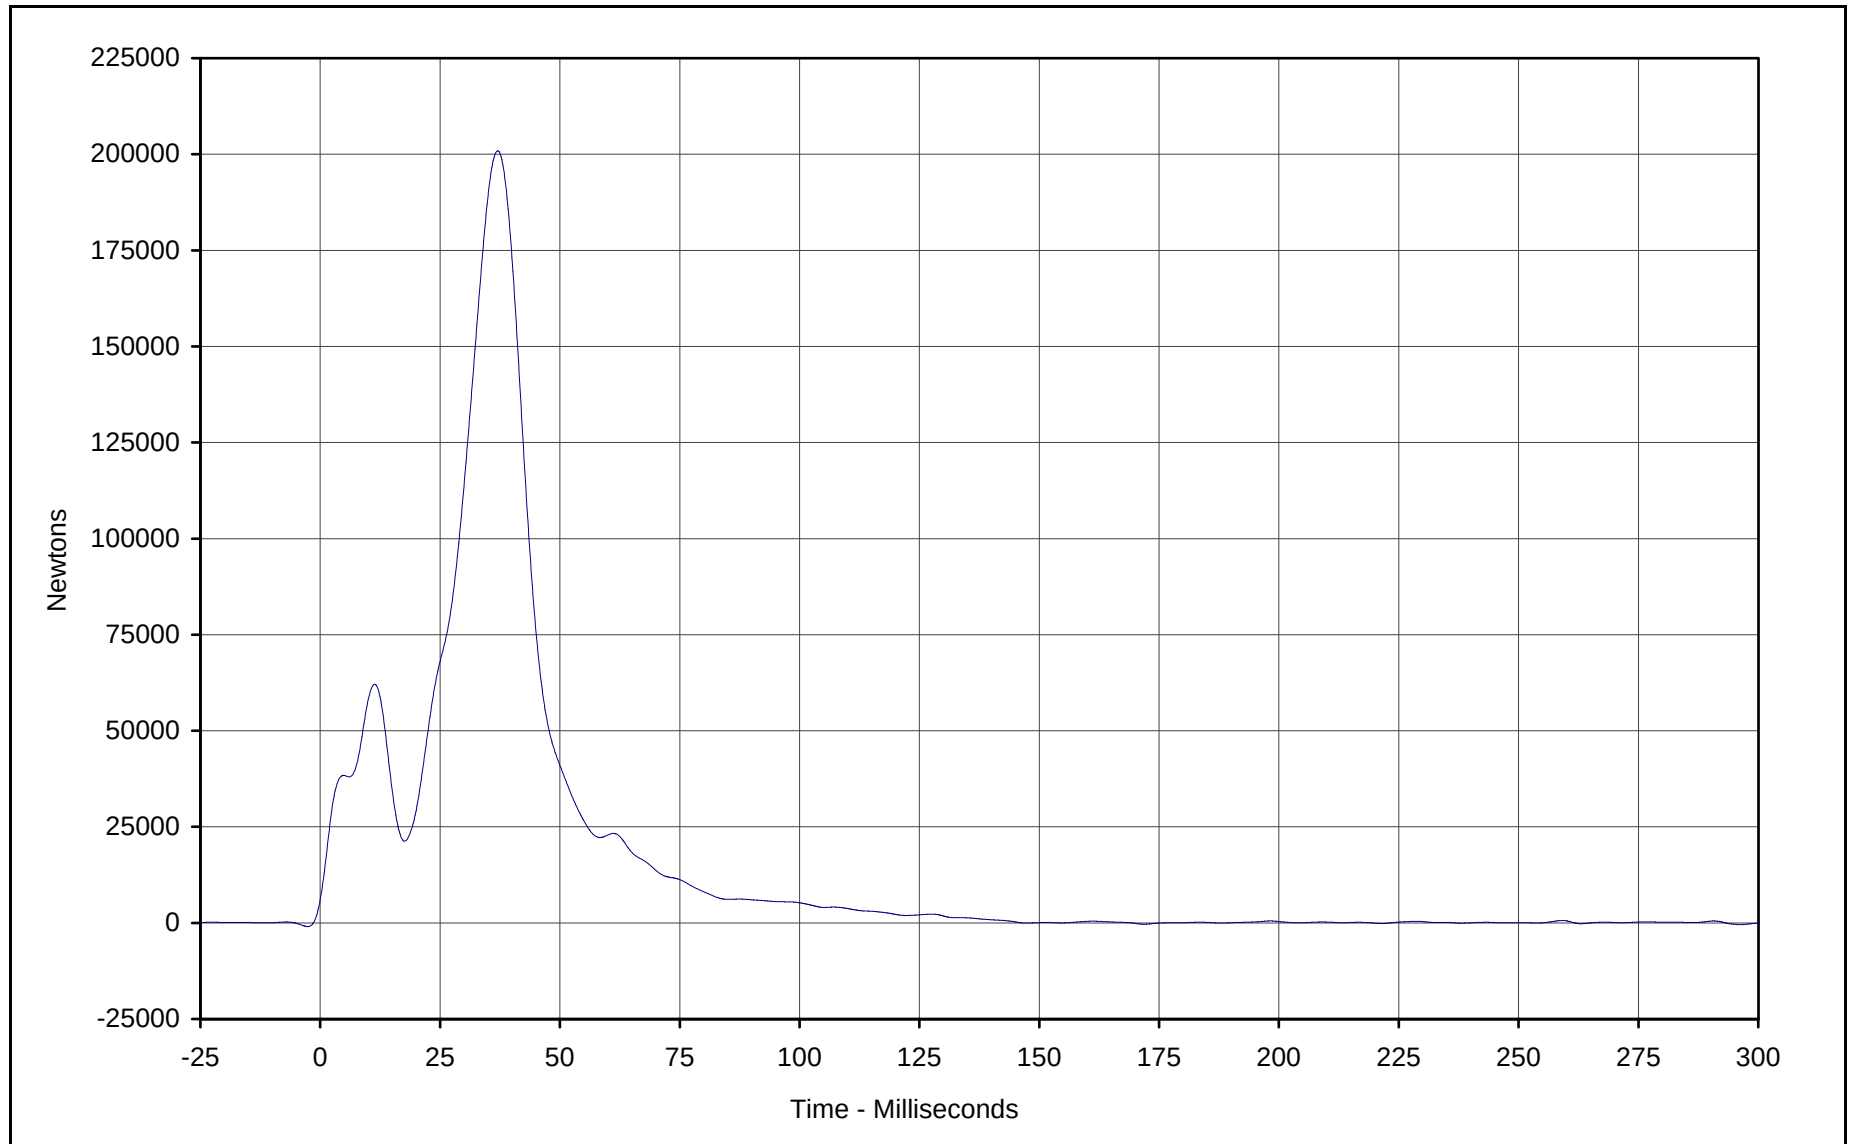


Curve Description: Barrier Force Sum Group 5
Maximum Value: 200892.1 at 37.0 Milliseconds
Minimum Value: -435.2 at 296.2 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: SUM-005

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-30

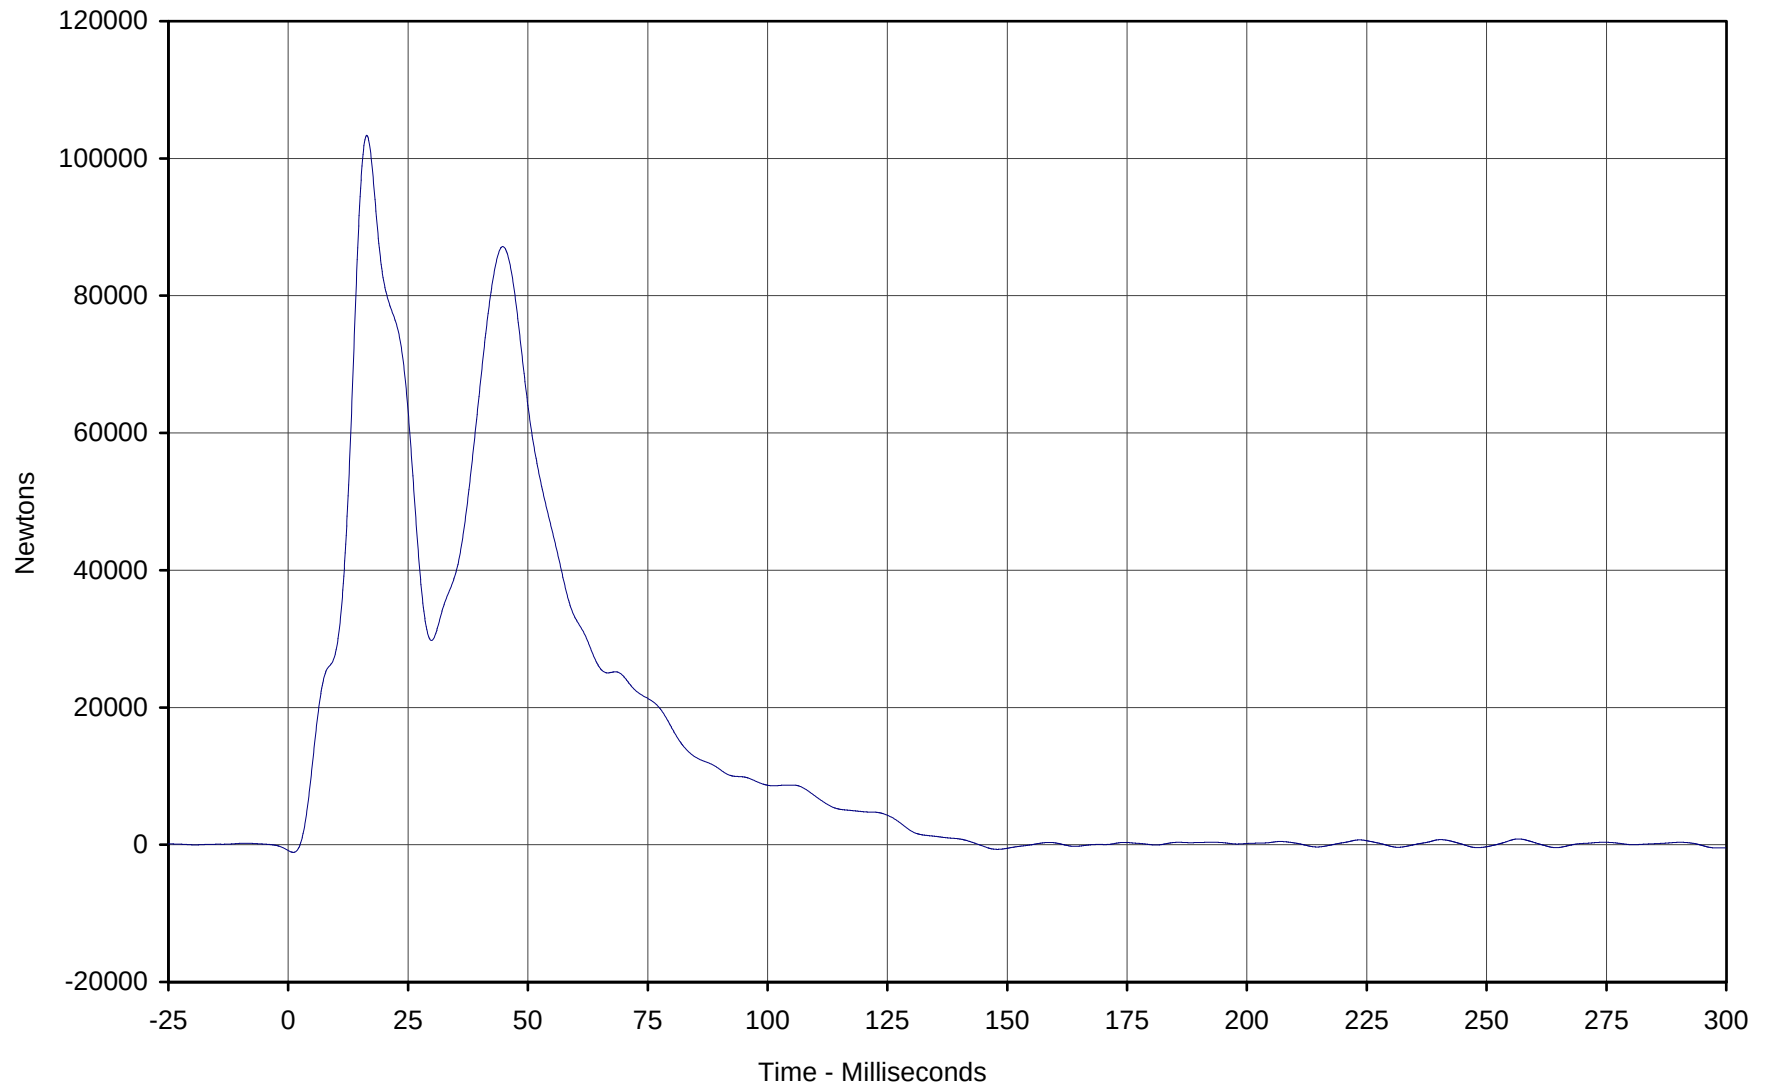


Curve Description: Barrier Force Sum Group 6
Maximum Value: 103353.3 at 16.4 Milliseconds
Minimum Value: -1106.0 at 1.1 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: SUM-006

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-31

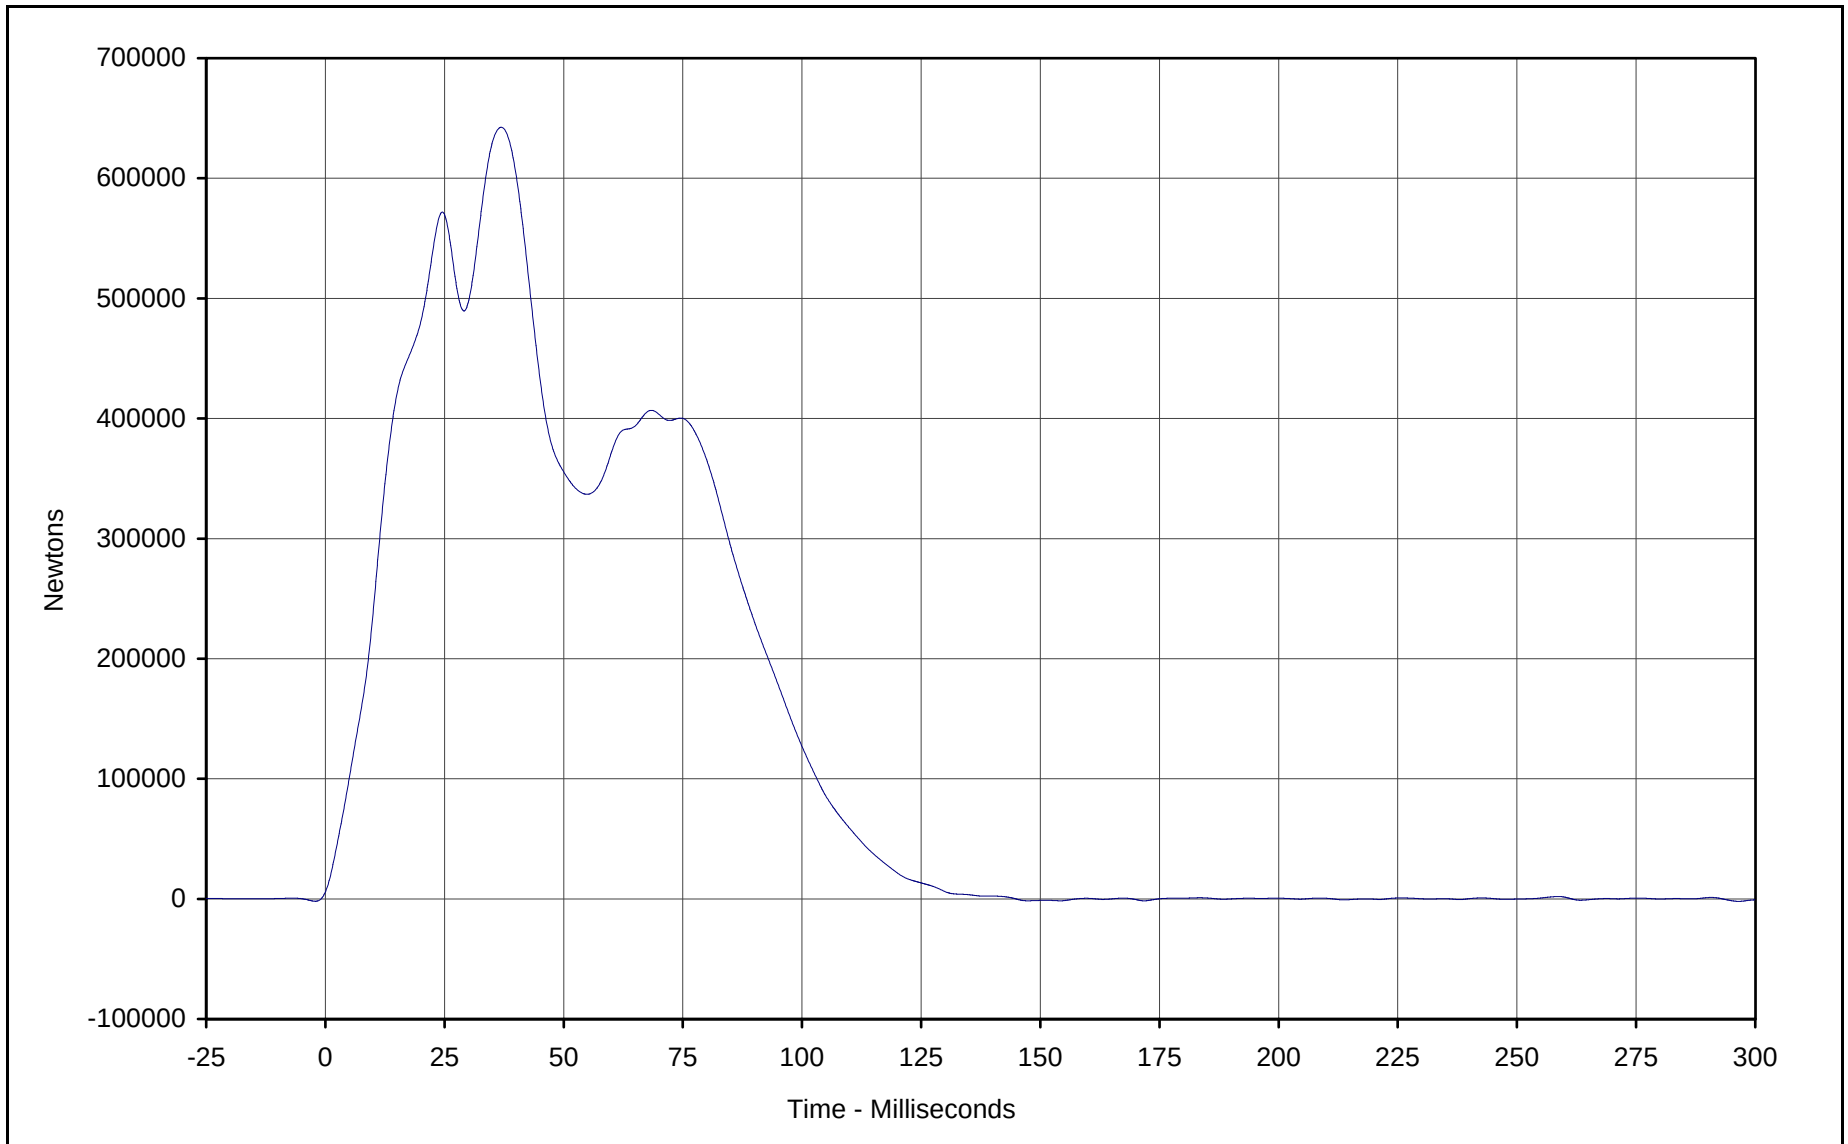


Curve Description: Barrier Force Sum Total
Maximum Value: 642458.5 at 36.9 Milliseconds
Minimum Value: -2042.1 at 296.5 Milliseconds
SAE Filter Class: 60
Date of Test: 02/13/01
Curve Number: SUM-007

Test Program: 2001 NHTSA 35mph NCAP No.: M10303
Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

C-32

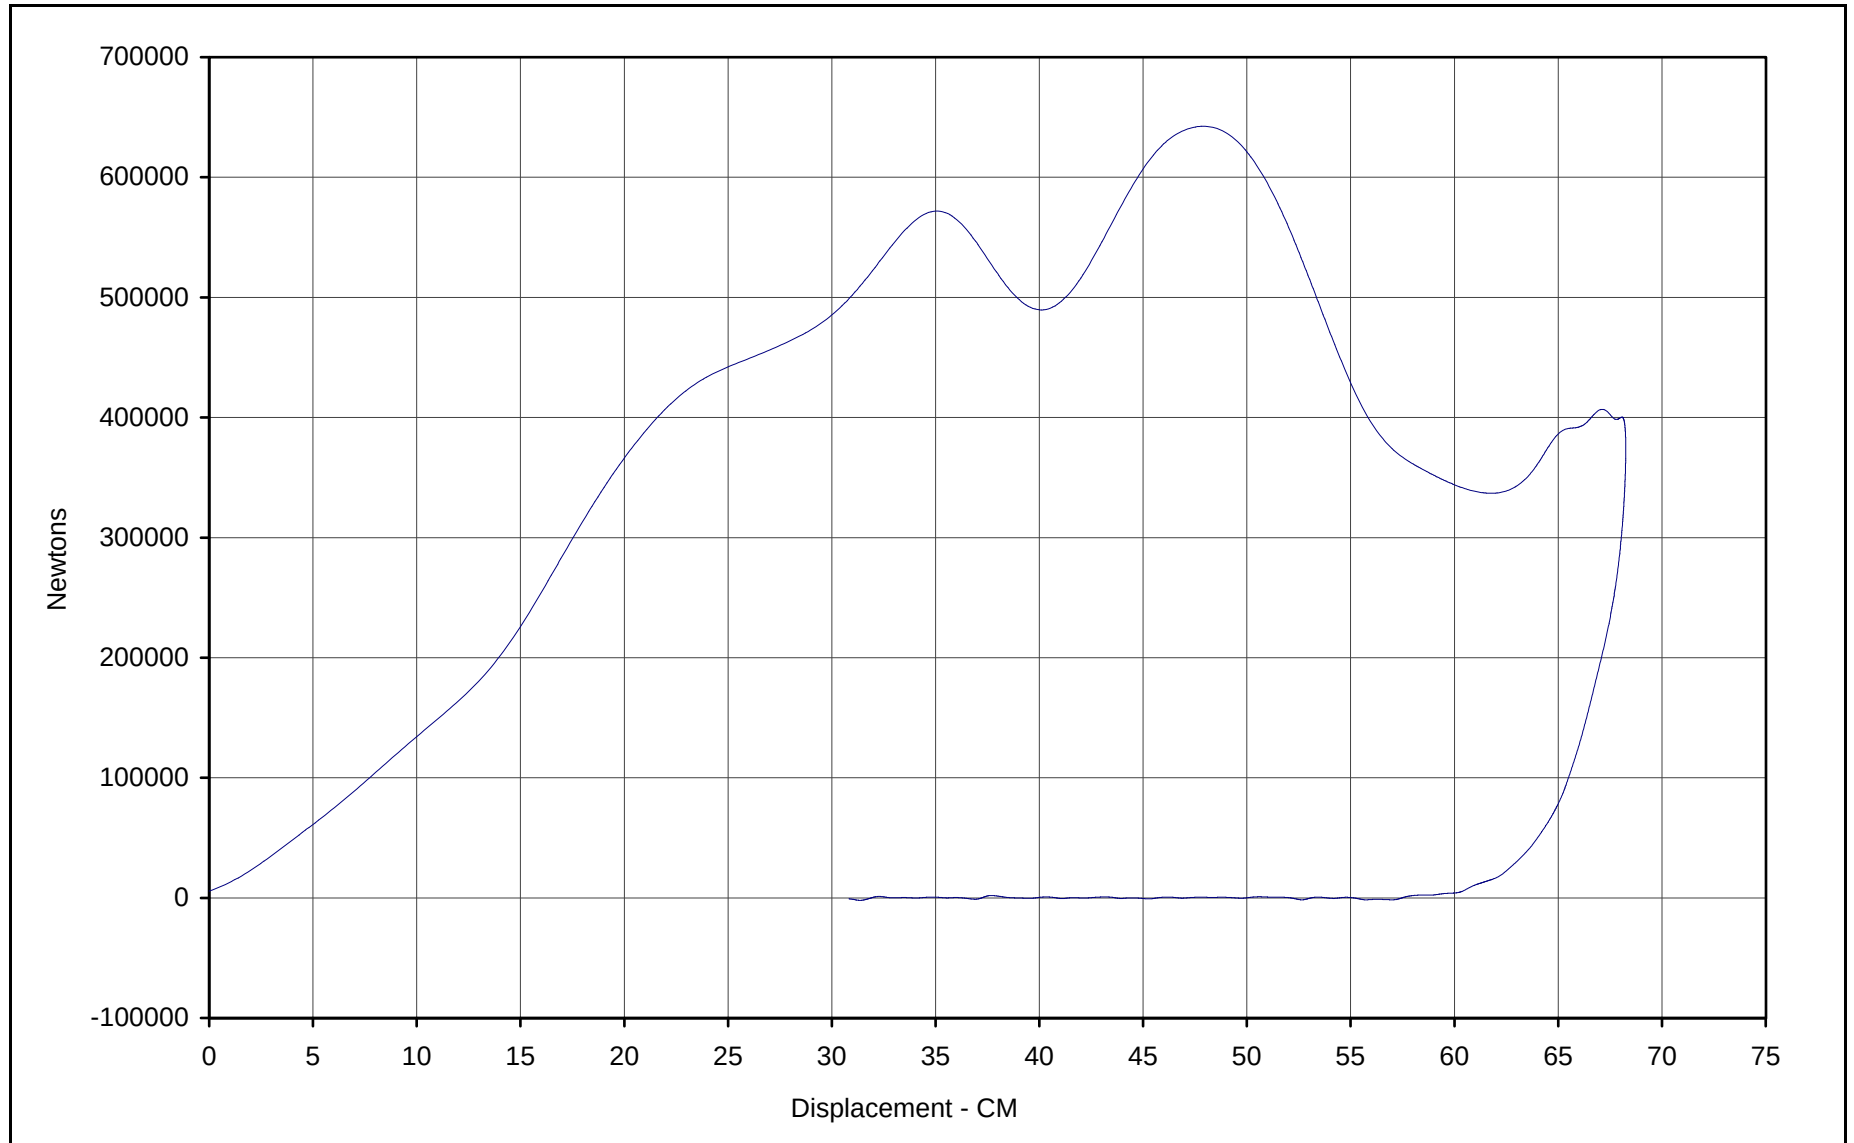

Curve Description: Sum Force Total vs. Dynamic Crush

Maximum Displ.: 68.3 at 79.3 Milliseconds

Maximum Force: 642458.5 at 36.9 Milliseconds

Measured Energy: 253846.47 joules

Date of Test: 02/13/01

Curve Number: XVY-001

Test Program: 2001 NHTSA 35mph NCAP No.: M10303

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup



KAR21001-10

BARRIER LOAD CELL SUMMARY DATA

Test Vehicle: 2001 Dodge Dakota Sport Quad Cab Pickup

NHTSA No.: M10303

Test Program: 2001 NHTSA 35mph NCAP

Test Date: 02/13/01

BARRIER LOAD CELL PEAK FORCES

Location	Units	Max	Time	Min	Time
Barrier Force A2	Newtons	2669.0	82.7	-1153.5	45.1
Barrier Force A3	Newtons	1999.5	37.5	-1427.2	19.0
Barrier Force A4	Newtons	13238.5	37.3	-678.8	2.3
Barrier Force A5	Newtons	34546.8	33.3	-675.8	1.8
Barrier Force A6	Newtons	4054.6	33.7	-1534.3	19.3
Barrier Force A7	Newtons	1458.6	34.1	-1092.7	29.5
Barrier Force A8	Newtons	2455.3	84.4	-479.0	44.9
Barrier Force A9	Newtons	737.2	48.9	-1042.1	52.9
Barrier Force B2	Newtons	26142.3	24.3	-527.7	2.4
Barrier Force B3	Newtons	129417.8	25.0	-759.8	2.0
Barrier Force B4	Newtons	34682.3	72.5	-145.6	299.9
Barrier Force B5	Newtons	35990.6	74.3	-177.6	171.7
Barrier Force B6	Newtons	71134.2	34.7	-149.2	146.7
Barrier Force B7	Newtons	137793.8	20.6	-1107.5	129.6
Barrier Force B8	Newtons	15396.6	70.0	-338.0	10.3
Barrier Force B9	Newtons	672.1	49.0	-1192.2	35.3
Barrier Force C2	Newtons	18628.6	23.1	-722.8	2.4
Barrier Force C3	Newtons	77120.1	15.9	-711.8	0.6
Barrier Force C4	Newtons	51613.1	33.1	-155.0	262.8
Barrier Force C5	Newtons	126925.6	38.0	-189.3	295.9
Barrier Force C6	Newtons	31863.3	35.9	-148.9	296.6
Barrier Force C7	Newtons	88779.5	16.3	-959.4	0.8
Barrier Force C8	Newtons	15837.5	43.8	-343.7	2.7
Barrier Force C9	Newtons	2029.2	17.0	-917.1	10.8
Barrier Force Sum Group 1	Newtons	156076.7	24.7	-2032.4	2.3
Barrier Force Sum Group 2	Newtons	171550.1	74.8	-674.0	171.9
Barrier Force Sum Group 3	Newtons	141028.1	20.5	-1198.7	1.6
Barrier Force Sum Group 4	Newtons	92606.7	17.3	-1143.5	1.0
Barrier Force Sum Group 5	Newtons	200892.1	37.0	-435.2	296.2
Barrier Force Sum Group 6	Newtons	103353.3	16.4	-1106.0	1.1
Barrier Force Sum Total	Newtons	642458.5	36.9	-2042.1	296.5

Barrier Load cells A1,B1,C1, and D1 through D9 (12 locations) were not recorded.

APPENDIX D

INSTRUMENTATION DATA CHANNEL ASSIGNMENTS

2001 NHTSA 35mph NCAP
Instrumentation Data Channel Assignments
Driver A.T.D. Serial Number 34
02/13/01
2001 Dodge Dakota Sport Quad Cab Pickup

CH.	LOCATION	AXIS	IDENT. NO.	DESCRIPTION	MFR	MODEL	UNITS
1	HEAD, PRIMARY	X	GPAC027	Accel., 1/2 bridge	Endevco	7264-2000	G
2	HEAD, PRIMARY	Y	GPAC002	Accel., 1/2 bridge	Endevco	7264-2000	G
3	HEAD, PRIMARY	Z	GPAC003	Accel., 1/2 bridge	Endevco	7264-2000	G
4	HEAD, REDUNDANT	X	GPAC032	Accel., 1/2 bridge	Endevco	7264-2000	G
5	HEAD, REDUNDANT	Y	GPAC021	Accel., 1/2 bridge	Endevco	7264-2000	G
6	HEAD, REDUNDANT	Z	GPAC026	Accel., 1/2 bridge	Endevco	7264-2000	G
7	NECK FORCE	X	GPUN01FX	Load cell, six axis neck	R. A. Denton	1716A	N
8	NECK FORCE	Y	GPUN01FY	Load cell, six axis neck	R. A. Denton	1716A	N
9	NECK FORCE	Z	GPUN01FZ	Load cell, six axis neck	R. A. Denton	1716A	N
10	NECK MOMENT	X	GPUN01MX	Load cell, six axis neck	R. A. Denton	1716A	Nm
11	NECK MOMENT	Y	GPUN01MY	Load cell, six axis neck	R. A. Denton	1716A	Nm
12	NECK MOMENT	Z	GPUN01MZ	Load cell, six axis neck	R. A. Denton	1716A	Nm
13	CHEST , PRIMARY	X	GPAC005	Accel., 1/2 bridge	Endevco	7264-2000	G
14	CHEST , PRIMARY	Y	GPAC011	Accel., 1/2 bridge	Endevco	7264-2000	G
15	CHEST , PRIMARY	Z	GPAC010	Accel., 1/2 bridge	Endevco	7264-2000	G
16	CHEST , REDUNDANT	X	GPAC034	Accel., 1/2 bridge	Endevco	7264-2000	G
17	CHEST , REDUNDANT	Y	GPAC023	Accel., 1/2 bridge	Endevco	7264-2000	G
18	CHEST , REDUNDANT	Z	GPAC020	Accel., 1/2 bridge	Endevco	7264-2000	G
19	CHEST DISPLACEMENT	X	GPCP002	Rotary Pot Chest	Servo	14CBI	MM
20	PELVIS, PRIMARY	X	GPAC025	Accel., 1/2 bridge	Endevco	7264-2000	G
21	PELVIS, PRIMARY	Y	GPAC022	Accel., 1/2 bridge	Endevco	7264-2000	G
22	PELVIS, PRIMARY	Z	GPAC019	Accel., 1/2 bridge	Endevco	7264-2000	G
23	LEFT FEMUR FORCE	Z	KEFF003	Load cell, Femur	R.A. Denton	2121	N
24	RIGHT FEMUR FORCE	Z	KEFF004	Load cell, Femur	R.A. Denton	2121	N

2001 NHTSA 35mph NCAP
Instrumentation Data Channel Assignments
Driver A.T.D. Serial Number 34
02/13/01
2001 Dodge Dakota Sport Quad Cab Pickup

CH.	LOCATION	AXIS	IDENT. NO.	DESCRIPTION	MFR	MODEL	UNITS
25	UP. TIBIA LEFT MOM.	X	GPOT09MX	2 ch., Upper tibia gage	R. A. Denton	1583	Nm
26	UP. TIBIA LEFT MOM.	Y	GPOT09MY	2 ch., Upper tibia gage	R. A. Denton	1583	Nm
27	UP. TIBIA RIGHT MOM.	X	GPOT09MX	2 ch., Upper tibia gage	R. A. Denton	1583	Nm
28	UP. TIBIA RIGHT MOM.	Y	GPOT09MY	2 ch., Upper tibia gage	R. A. Denton	1583	Nm
29	LWR. TIBIA LEFT MOM.	X	GPLT09MX	3 ch., lower tibia gage	R. A. Denton	3093	Nm
30	LWR. TIBIA LEFT MOM.	Y	GPLT09MY	3 ch., lower tibia gage	R. A. Denton	3093	Nm
31	LWR. TIBIA LEFT FORCE	Z	GPLT09FZ	3 ch., lower tibia gage	R. A. Denton	3093	N
32	LWR. TIBIA RIGHT MOM.	X	GPLT09MX	3 ch., lower tibia gage	R. A. Denton	3093	Nm
33	LWR. TIBIA RIGHT MOM.	Y	GPLT09MY	3 ch., lower tibia gage	R. A. Denton	3093	Nm
34	LWR. TIBIA RIGHT FORCE	Z	GPLT09FZ	3 ch., lower tibia gage	R. A. Denton	3093	N
35	FOOT LEFT	X	KEIC002X	Accel., Foot Triax	I.C. Sensor	3031-500	G
36	FOOT LEFT	Y	KEIC002Y	Accel., Foot Triax	I.C. Sensor	3031-500	G
37	FOOT LEFT	Z	KEIC002Z	Accel., Foot Triax	I.C. Sensor	3031-500	G
38	FOOT RIGHT	X	KEIC001X	Accel., Foot Triax	I.C. Sensor	3031-500	G
39	FOOT RIGHT	Y	KEIC001Y	Accel., Foot Triax	I.C. Sensor	3031-500	G
40	FOOT RIGHT	Z	KEIC001Z	Accel., Foot Triax	I.C. Sensor	3031-500	G
41	LAP BELT FORCE	X	KELC003	Load cell, Seat belt	Lebow	3371	N
42	SHOULDER BELT FORCE	X	KELC004	Load cell, Seat belt	Lebow	3371	N
43	SHOULDER BELT SPOOL	X	KEPP001	Pullout pot	Celesco	PTX101-0030	MM
44	SHOULDER BELT ELONG.	X	KEEP001	Linear pot., belt stretch	E.T.I.	LCP8-10 10K	MM/CM

2001 NHTSA 35mph NCAP
Instrumentation Data Channel Assignments
Passenger A.T.D. Serial Number 35
02/13/01
2001 Dodge Dakota Sport Quad Cab Pickup

CH.	LOCATION	AXIS	IDENT. NO.	DESCRIPTION	MFR	MODEL	UNITS
45	HEAD, PRIMARY	X	KEAC039	Accel.,1/2 bridge	Endevco	7264-2000	G
46	HEAD, PRIMARY	Y	KEAC038	Accel.,1/2 bridge	Endevco	7264-2000	G
47	HEAD, PRIMARY	Z	KEAC027	Accel.,1/2 bridge	Endevco	7264-2000	G
48	HEAD, REDUNDANT	X	KEAC031	Accel.,1/2 bridge	Endevco	7264-2000	G
49	HEAD, REDUNDANT	Y	KEAC032	Accel.,1/2 bridge	Endevco	7264-2000	G
50	HEAD, REDUNDANT	Z	KEAC026	Accel.,1/2 bridge	Endevco	7264-2000	G
51	NECK FORCE	X	GPUN02FX	Load cell, six axis neck	R. A. Denton	1716A	N
52	NECK FORCE	Y	GPUN02FY	Load cell, six axis neck	R. A. Denton	1716A	N
53	NECK FORCE	Z	GPUN02FZ	Load cell, six axis neck	R. A. Denton	1716A	N
54	NECK MOMENT	X	GPUN02MX	Load cell, six axis neck	R. A. Denton	1716A	Nm
55	NECK MOMENT	Y	GPUN02MY	Load cell, six axis neck	R. A. Denton	1716A	Nm
56	NECK MOMENT	Z	GPUN02MZ	Load cell, six axis neck	R. A. Denton	1716A	Nm
57	CHEST , PRIMARY	X	GPAC031	Accel., 1/2 bridge	Endevco	7264-2000	G
58	CHEST , PRIMARY	Y	GPAC024	Accel., 1/2 bridge	Endevco	7264-2000	G
59	CHEST , PRIMARY	Z	GPAC029	Accel., 1/2 bridge	Endevco	7264-2000	G
60	CHEST , REDUNDANT	X	KEAC023	Accel.,1/2 bridge	Endevco	7264-200	G
61	CHEST , REDUNDANT	Y	KEAC022	Accel.,1/2 bridge	Endevco	7264-200	G
62	CHEST , REDUNDANT	Z	KEAC024	Accel.,1/2 bridge	Endevco	7264-200	G
63	CHEST DISPLACEMENT	X	GPCP001	Rotary Pot Chest	Servo	14CBI	MM
64	PELVIS, PRIMARY	X	KEAC019	Accel.,1/2 bridge	Endevco	7264-200	G
65	PELVIS, PRIMARY	Y	KEAC020	Accel.,1/2 bridge	Endevco	7264-200	G
66	PELVIS, PRIMARY	Z	KEAC021	Accel.,1/2 bridge	Endevco	7264-200	G
67	LEFT FEMUR FORCE	Z	KEFF001	Load cell, Femur	R.A. Denton	2121	N
68	RIGHT FEMUR FORCE	Z	KEFF002	Load cell, Femur	R.A. Denton	2121	N

2001 NHTSA 35mph NCAP
Instrumentation Data Channel Assignments
Passenger A.T.D. Serial Number 35
02/13/01
2001 Dodge Dakota Sport Quad Cab Pickup

CH.	LOCATION	AXIS	IDENT. NO.	DESCRIPTION	MFR	MODEL	UNITS
69	UP. TIBIA LEFT MOM.	X	GPOT09MX	2 ch., Upper tibia gage	R. A. Denton	1583	Nm
70	UP. TIBIA LEFT MOM.	Y	GPOT09MY	2 ch., Upper tibia gage	R. A. Denton	1583	Nm
71	UP. TIBIA RIGHT MOM.	X	GPOT09MX	2 ch., Upper tibia gage	R. A. Denton	1583	Nm
72	UP. TIBIA RIGHT MOM.	Y	GPOT09MY	2 ch., Upper tibia gage	R. A. Denton	1583	Nm
73	LWR. TIBIA LEFT MOM.	X	GPLT09MX	3 ch., lower tibia gage	R. A. Denton	3093	Nm
74	LWR. TIBIA LEFT MOM.	Y	GPLT09MY	3 ch., lower tibia gage	R. A. Denton	3093	Nm
75	LWR. TIBIA LEFT FORCE	Z	GPLT09FZ	3 ch., lower tibia gage	R. A. Denton	3093	N
76	LWR. TIBIA RIGHT MOM.	X	GPLT09MX	3 ch., lower tibia gage	R. A. Denton	3093	Nm
77	LWR. TIBIA RIGHT MOM.	Y	GPLT09MY	3 ch., lower tibia gage	R. A. Denton	3093	Nm
78	LWR. TIBIA RIGHT FORCE	Z	GPLT09FZ	3 ch., lower tibia gage	R. A. Denton	3093	N
79	FOOT LEFT	X	KEIC003X	Accel., Foot Triax	I.C. Sensor	3031-500	G
80	FOOT LEFT	Y	KEIC003Y	Accel., Foot Triax	I.C. Sensor	3031-500	G
81	FOOT LEFT	Z	KEIC003Z	Accel., Foot Triax	I.C. Sensor	3031-500	G
82	FOOT RIGHT	X	KEIC004X	Accel., Foot Triax	I.C. Sensor	3031-500	G
83	FOOT RIGHT	Y	KEIC004Y	Accel., Foot Triax	I.C. Sensor	3031-500	G
84	FOOT RIGHT	Z	KEIC004Z	Accel., Foot Triax	I.C. Sensor	3031-500	G
85	LAP BELT FORCE	X	KELC001	Load cell, Seat belt	Lebow	3371	N
86	SHOULDER BELT FORCE	X	KELC002	Load cell, Seat belt	Lebow	3371	N
87	SHOULDER BELT SPOOL	X	KEPP001	Pullout pot	Celesco	PTX101-0030	CM
88	SHOULDER BELT ELONG.	X	KEEP001	Linear pot., belt stretch	E.T.I.	LCP8-10 10K	MM/CM

2001 NHTSA 35mph NCAP
Instrumentation Data Channel Assignments
Vehicle Accelerometers and Reference Channel
02/13/01
2001 Dodge Dakota Sport Quad Cab Pickup

CH.	LOCATION	AXIS	IDENT. NO.	DESCRIPTION	MFR	MODEL	UNITS
89	Left Rear Primary	X	KEVA010	Accel., Vehicle block	I.C. Sensor	3031-200	G
90	Right Rear Primary	Y	KEVA006	Accel., Vehicle block	I.C. Sensor	3031-200	G
91	Engine Top	X	KEVA001	Accel., Vehicle block	I.C. Sensor	3031-500	G
92	Engine Bottom	Y	KEVA008	Accel., Vehicle block	I.C. Sensor	3031-500	G
93	Left Brake Caliper	X	KEVA004	Accel., Vehicle block	I.C. Sensor	3031-500	G
94	Right Brake Caliper	Y	KEVA009	Accel., Vehicle block	I.C. Sensor	3031-500	G
95	Instrument Panel	X	KEVA003	Accel., Vehicle block	I.C. Sensor	3031-500	G
96	Left Rear Redundant	Y	KEVA011	Accel., Vehicle block	I.C. Sensor	3031-200	G
97	Zero Reference	N/A	N/A	N/A	N/A	N/A	N/A

2001 NHTSA 35mph NCAP
Instrumentation Data Channel Assignments
Rigid Load Cell Barrier
02/13/01
2001 Dodge Dakota Sport Quad Cab Pickup

CH.	LOCATION	AXIS	IDENT. NO.	DESCRIPTION	MFR	MODEL	UNITS
98	BARRIER FORCE A1	X	BARRIER	Not Used	N/A	N/A	N/A
99	BARRIER FORCE A2	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N
100	BARRIER FORCE A3	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N
101	BARRIER FORCE A4	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N
102	BARRIER FORCE A5	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N
103	BARRIER FORCE A6	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N
104	BARRIER FORCE A7	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N
105	BARRIER FORCE A8	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N
106	BARRIER FORCE A9	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N
107	BARRIER FORCE B1	X	BARRIER	Not Used	N/A	N/A	N/A
108	BARRIER FORCE B2	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N
109	BARRIER FORCE B3	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N
110	BARRIER FORCE B4	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N
111	BARRIER FORCE B5	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N
112	BARRIER FORCE B6	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N
113	BARRIER FORCE B7	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N
114	BARRIER FORCE B8	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N
115	BARRIER FORCE B9	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N

2001 NHTSA 35mph NCAP
Instrumentation Data Channel Assignments
Rigid Load Cell Barrier
02/13/01
2001 Dodge Dakota Sport Quad Cab Pickup

CH.	LOCATION	AXIS	IDENT. NO.	DESCRIPTION	MFR	MODEL	UNITS
116	BARRIER FORCE C1	X	BARRIER	Not Used	N/A	N/A	N/A
117	BARRIER FORCE C2	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N
118	BARRIER FORCE C3	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N
119	BARRIER FORCE C4	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N
120	BARRIER FORCE C5	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N
121	BARRIER FORCE C6	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N
122	BARRIER FORCE C7	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N
123	BARRIER FORCE C8	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N
124	BARRIER FORCE C9	X	BARRIER	Load Cell, LCB	Lebow	1220-FS	N
125	BARRIER FORCE D1	X	BARRIER	Not Used	N/A	N/A	N/A
126	BARRIER FORCE D2	X	BARRIER	Not Used	N/A	N/A	N/A
127	BARRIER FORCE D3	X	BARRIER	Not Used	N/A	N/A	N/A
128	BARRIER FORCE D4	X	BARRIER	Not Used	N/A	N/A	N/A
129	BARRIER FORCE D5	X	BARRIER	Not Used	N/A	N/A	N/A
130	BARRIER FORCE D6	X	BARRIER	Not Used	N/A	N/A	N/A
131	BARRIER FORCE D7	X	BARRIER	Not Used	N/A	N/A	N/A
132	BARRIER FORCE D8	X	BARRIER	Not Used	N/A	N/A	N/A
133	BARRIER FORCE D9	X	BARRIER	Not Used	N/A	N/A	N/A

APPENDIX E
DUMMY CALIBRATION DATA



Hybrid III Calibration Data Sheet

50TH Percentile Male

Left Knee Impact Test

ATD Serial No.: 034

Part Serial No.: N/A

Test I.D.: LK02C

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	18.9 to 25.5	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	2.073 to 2.134	2.113	Pass
Peak Probe Force	Newtons	4715 to 5782	5258.7	Pass
Overall Test Results				Pass


Laboratory Technician

February 12, 2001
Test Date

Approved By

Date

E-2

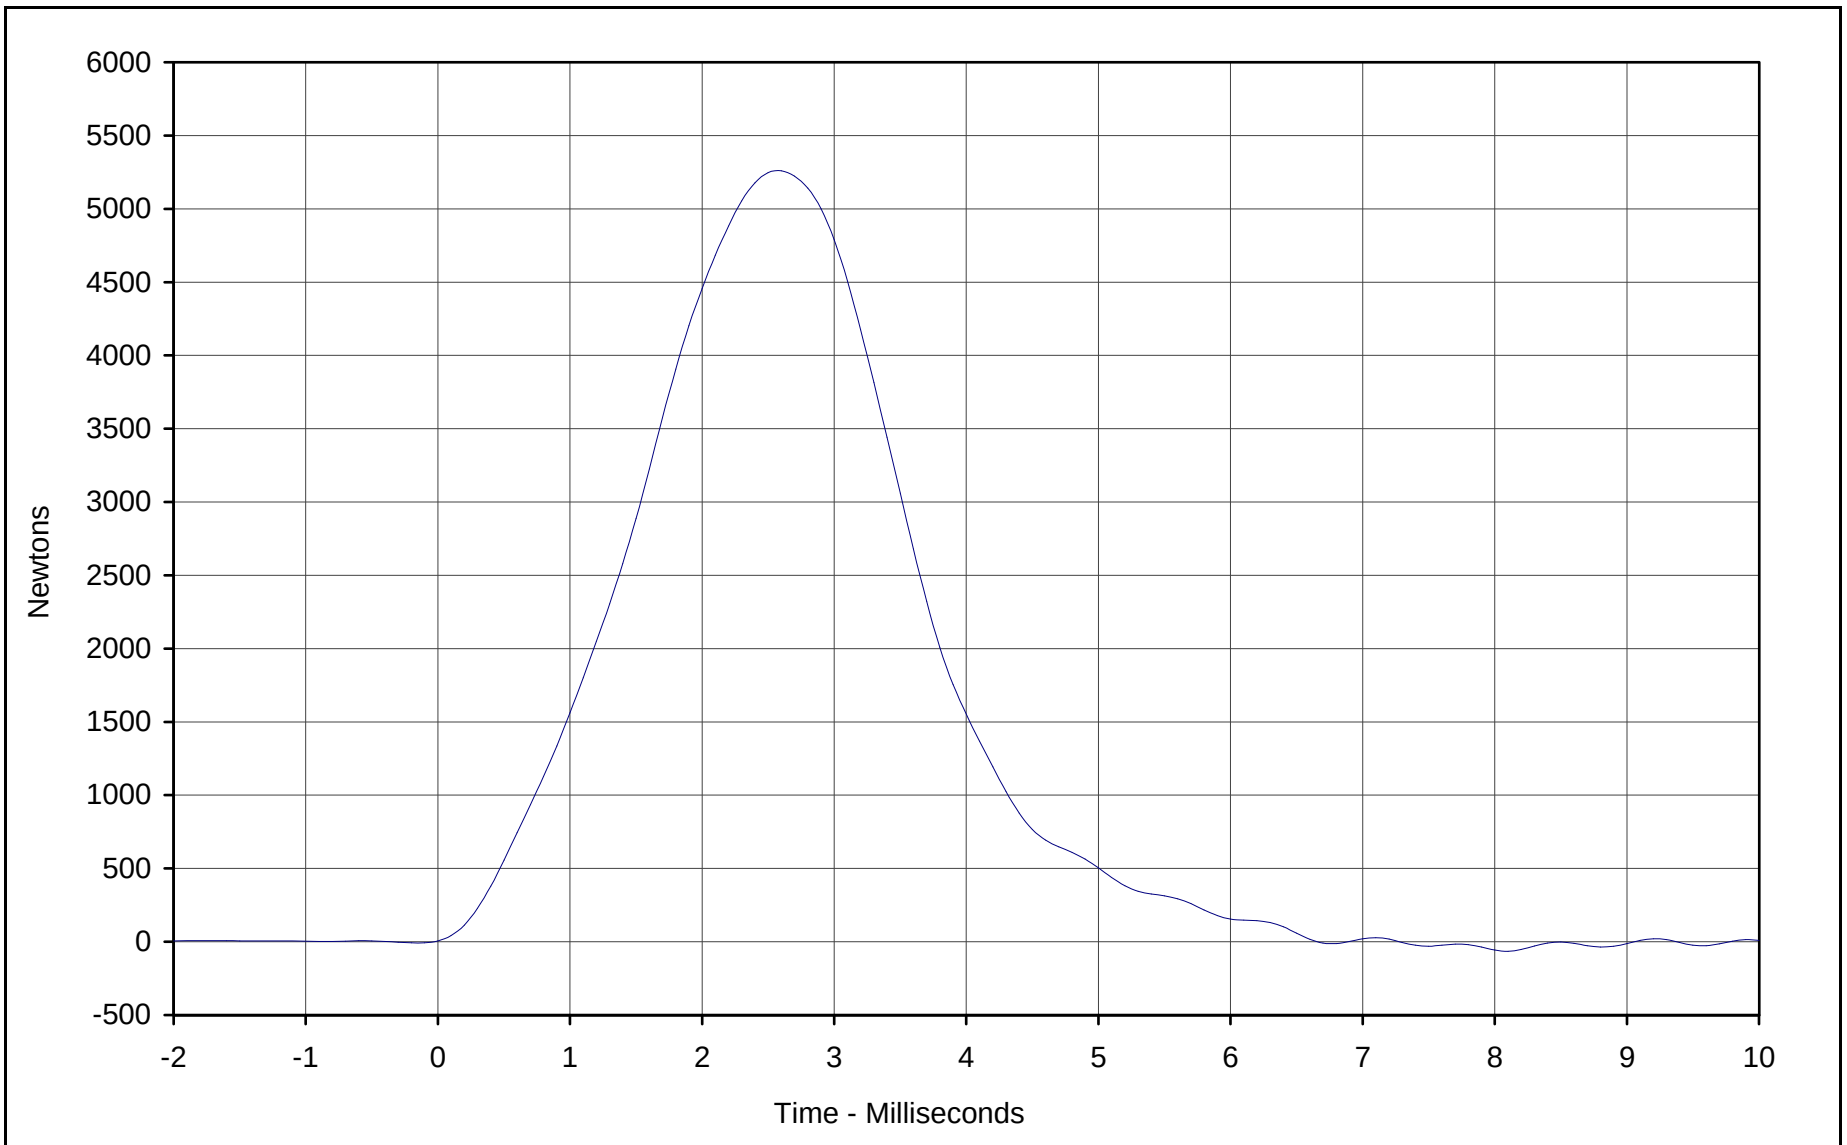

Curve Description: Probe Force

Maximum Value:	<u>5258.7</u>	at	<u>2.6</u>	Milliseconds
Minimum Value:	<u>-56.4</u>	at	<u>8.0</u>	Milliseconds
SAE Filter Class:	<u>600</u>			
Date of Test:	<u>2/12/01</u>			
ATD Serial No.:	<u>034</u>			

Testing Program: Hybrid III Left Knee Impact Test

Test Information: Part S/N: N/A Test I.D.: LK02C



KAR21001-10



Hybrid III Calibration Data Sheet

50TH Percentile Male

Right Knee Impact Test

ATD Serial No.: 034

Part Serial No.: N/A

Test I.D.: RK02C

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	18.9 to 25.5	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	2.073 to 2.134	2.113	Pass
Peak Probe Force	Newtons	4715 to 5782	5297.0	Pass
Overall Test Results				Pass


Laboratory Technician

February 12, 2001
Test Date

Approved By

Date

E-4

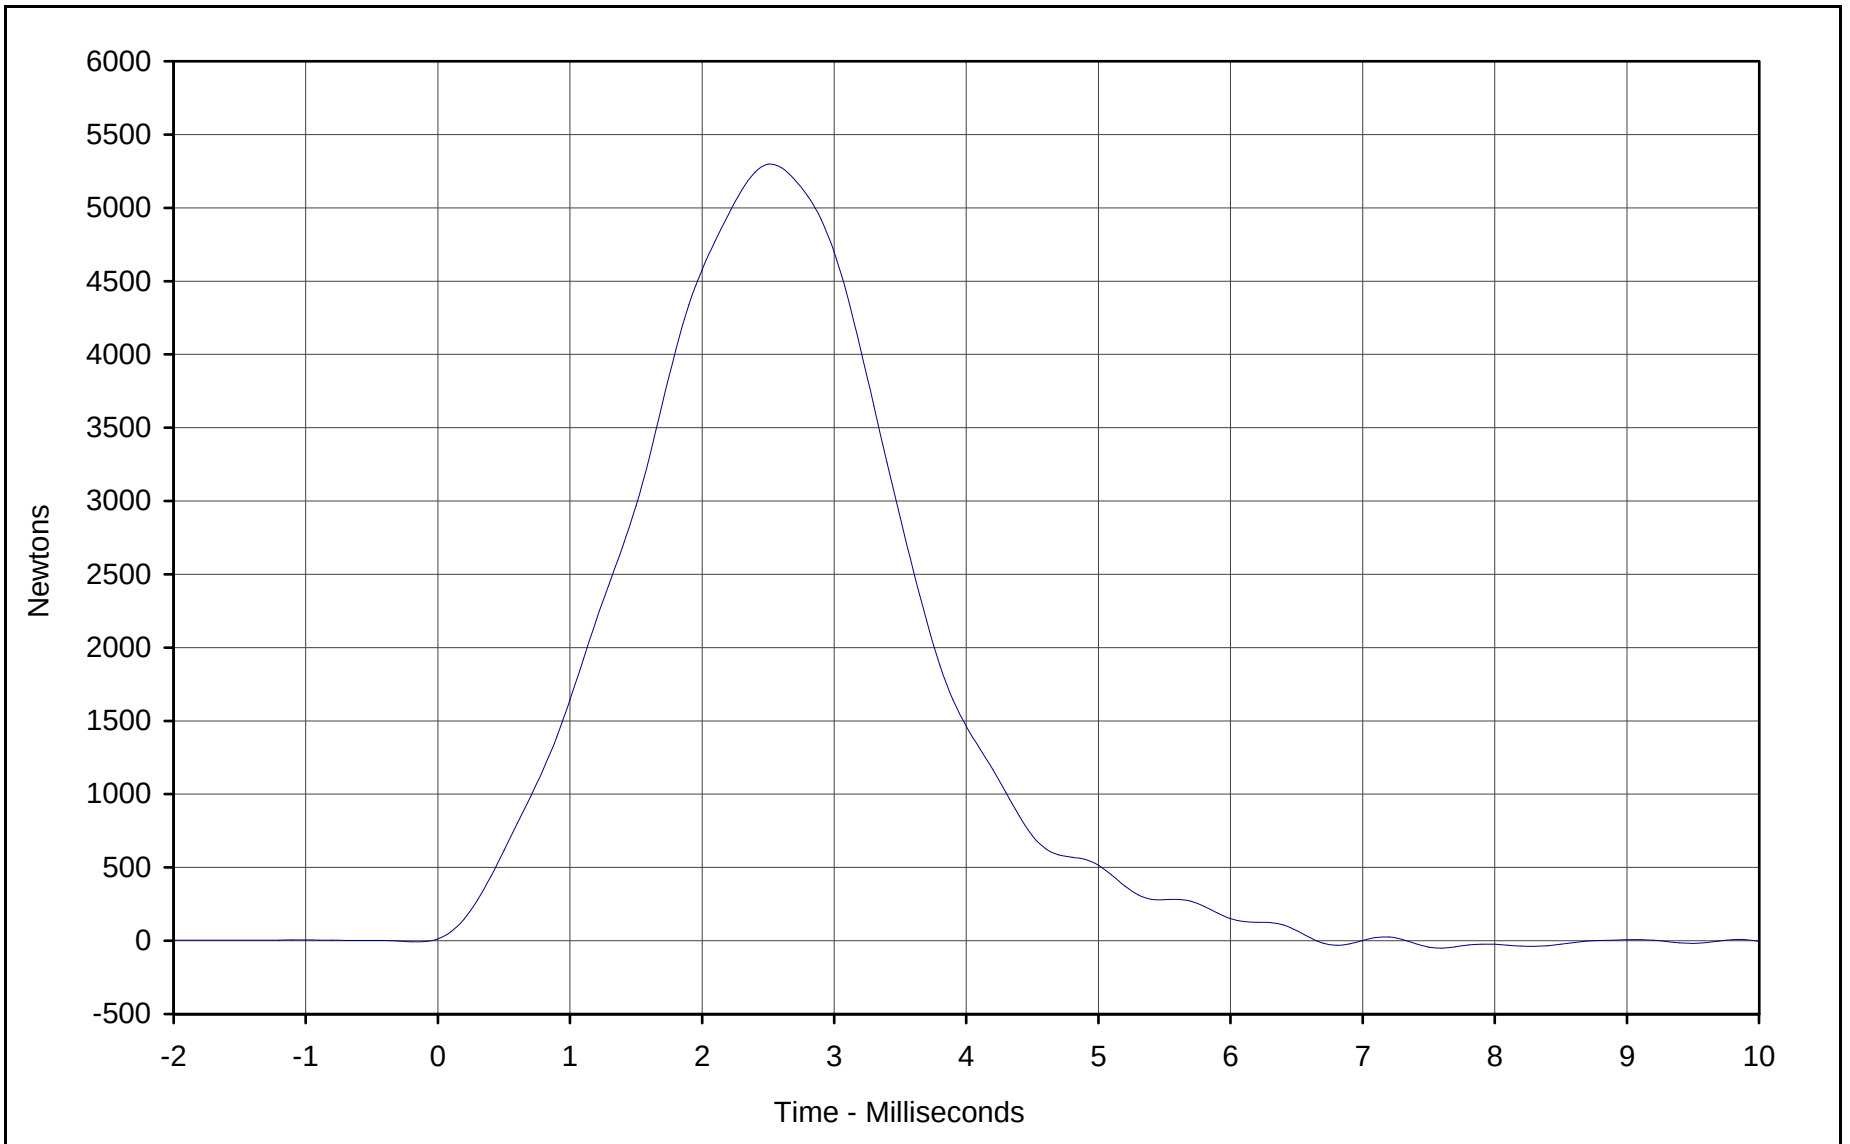

Curve Description:	Probe Force
Maximum Value:	5297.0 at 2.5 Milliseconds
Minimum Value:	-50.2 at 7.6 Milliseconds
SAE Filter Class:	600
Date of Test:	2/12/01
ATD Serial No.:	034

Testing Program:	Hybrid III Right Knee Impact Test
Test Information:	Part S/N: N/A Test I.D.: RK02C



KAR21001-10



Hybrid III Calibration Data Sheet

50TH Percentile Male

Head Drop Calibration

ATD Serial No.: 034

Part Serial No.: N/A

Test I.D.: HD01D-A

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	18.9 to 25.6	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Peak Resultant Acceleration	G's	225.0 to 275.0	234.6	Pass
Peak Lateral Acceleration	G's	≤15.0	9.3	Pass
Is Acceleration Unimodal?	Yes/No	Yes	Yes	Pass
Overall Test Results				Pass

Laboratory Technician


February 9, 2001

Test Date

Approved By

Date

E-6

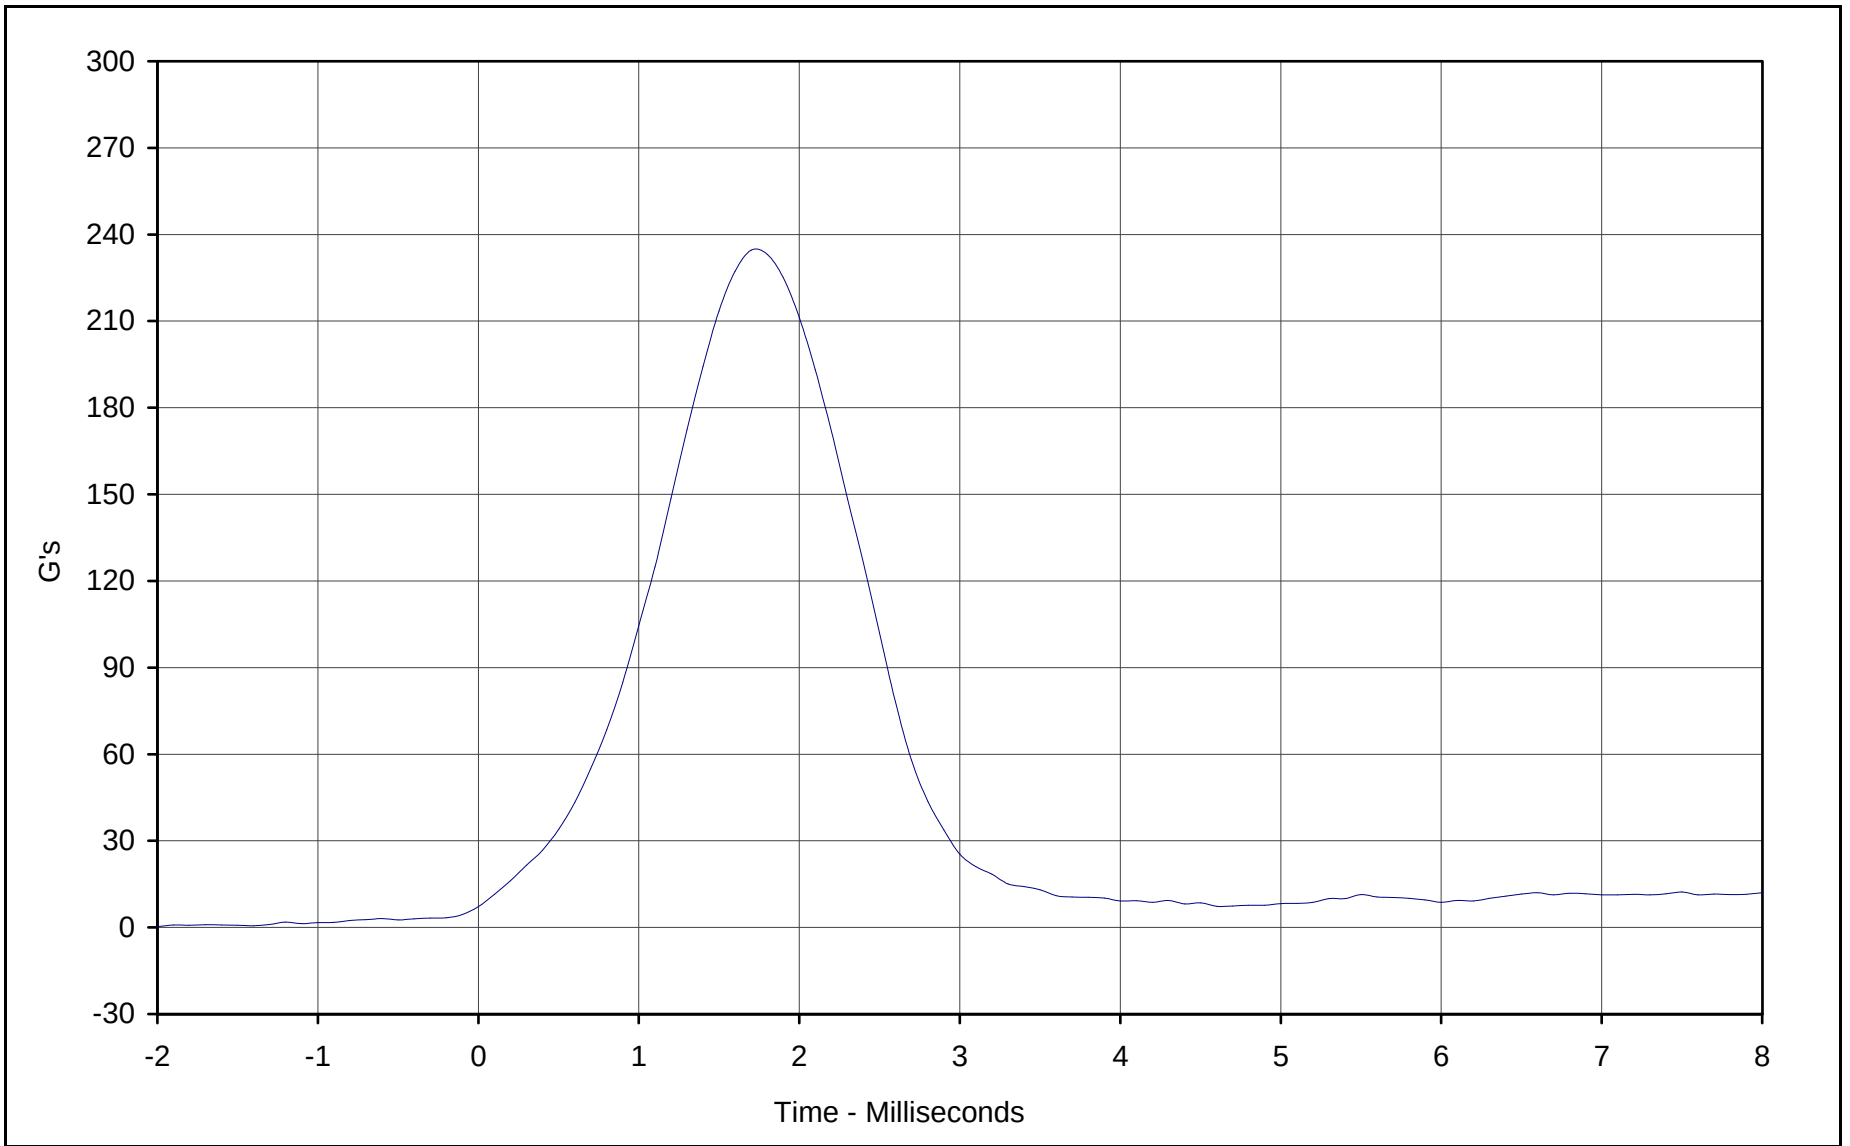

Curve Description: Head Resultant Acceleration

Maximum Value:	<u>234.6</u>	at	<u>1.7</u>	Milliseconds
Minimum Value:	<u>0.3</u>	at	<u>-2.0</u>	Milliseconds
SAE Filter Class:	<u>1000</u>			
Date of Test:	<u>2/9/01</u>			
ATD Serial No.:	<u>034</u>			


Testing Program: Hybrid III Head Drop Calibration (Male)

Test Information: S/N of Part: N/A Test I.D.: HD01D-A



KAR21001-10

E-7

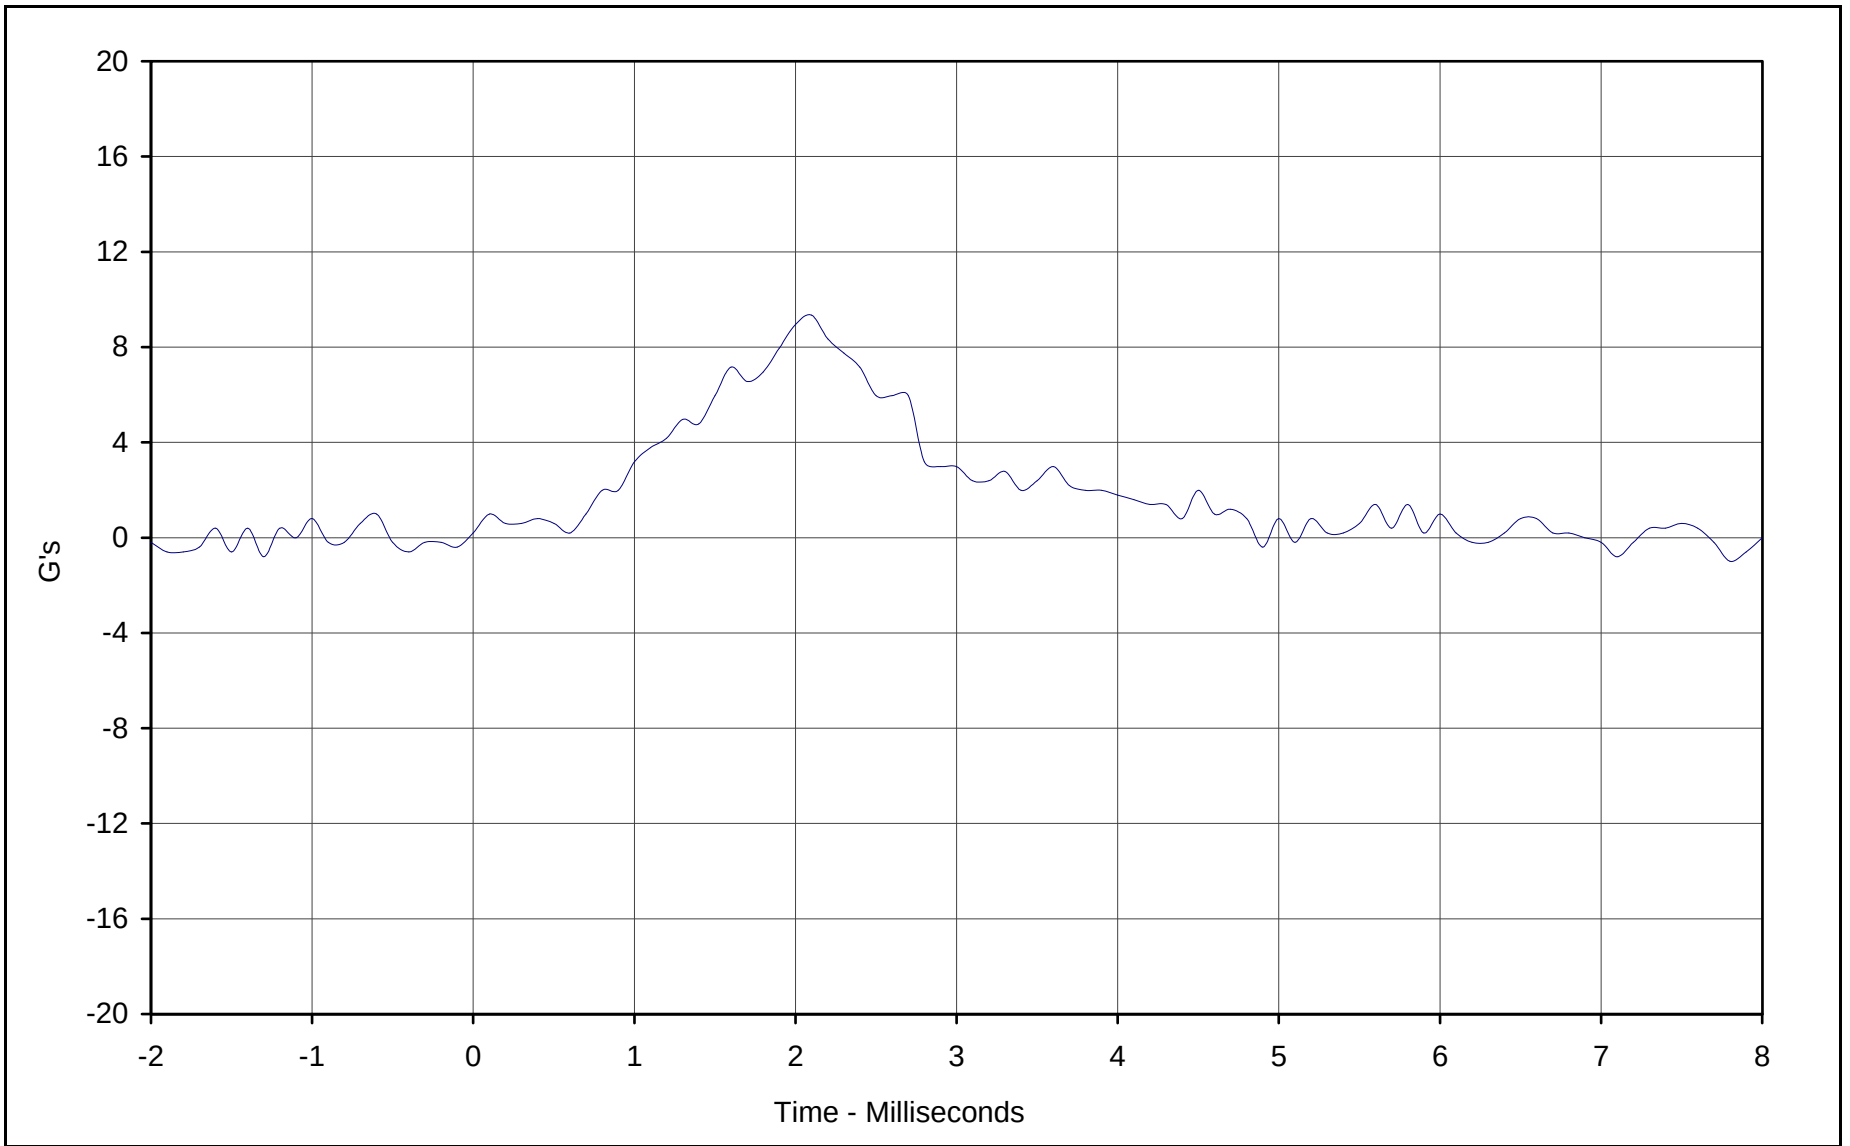

Curve Description: Head Acceleration Y Axis

Maximum Value:	9.3	at	2.1	Milliseconds
Minimum Value:	-1.0	at	7.8	Milliseconds
SAE Filter Class:	1000			
Date of Test:	2/9/01			
ATD Serial No.:	034			

Testing Program: Hybrid III Head Drop Calibration (Male)

Test Information: S/N of Part: N/A Test I.D.: HD01D-A



KAR21001-10



Hybrid III Calibration Data Sheet

50TH Percentile Male

Thorax Impact Test

ATD Serial No.: 034

Part Serial No.: N/A

Test I.D.: CH02X

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	6.58 to 6.82	6.61	Pass
Peak Probe Force	Newtons	5159 to 5893	5496	Pass
Peak Sternum Displacement	CM	6.35 to 7.26	6.69	Pass
Internal Hysteresis	%	69 to 85	76.8	Pass
Overall Test Results				Pass


Laboratory Technician

February 10, 2001

Test Date

Approved By

Date

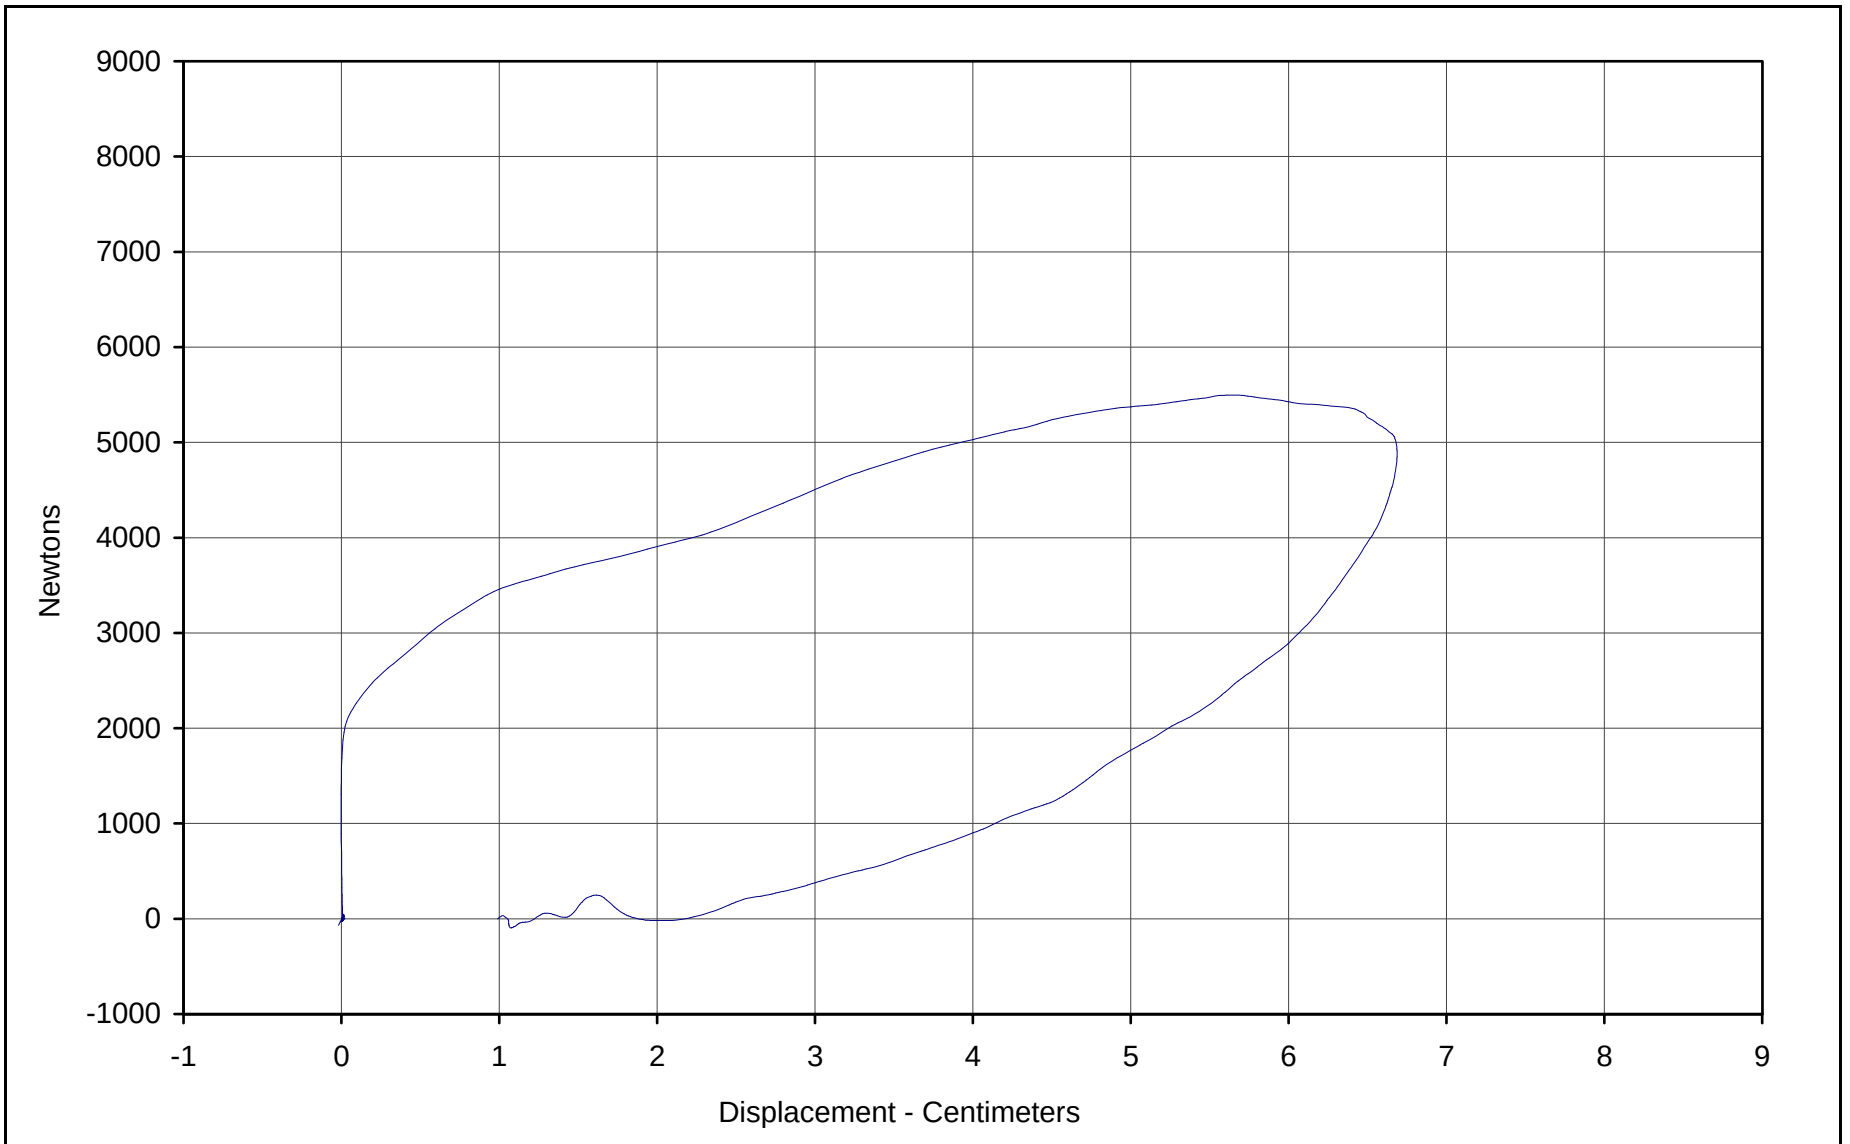

Curve Description: Probe Force vs. Chest Displacement

Probe Force: 5496.3 Newtons

Chest Displ.: 6.69 Centimeters

SAE Filter Class: 180

Date of Test: 2/10/01

ATD Serial No.: 034

Testing Program: Hybrid III Thorax Impact Test

Test Information: S/N of Part: N/A Test I.D.: CH02X





Hybrid III Calibration Data Sheet

50TH Percentile Male

Neck Flexion Test

ATD Serial No.: 034

Part Serial No.: N/A

Test I.D.: NF02E

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Velocity		m/s	6.89 to 7.13	6.89	Pass
Pendulum Deceleration	10 Msec.	G's	22.5 to 27.5	22.6	Pass
	20 Msec.	G's	17.6 to 22.6	20.7	Pass
	30 Msec.	G's	12.5 to 18.5	18.3	Pass
Peak Pendulum Decel. after 30 Msec.		G's	≤ 29.0	18.3	Pass
Deceleration Decay, Time to Cross 5 G's		Msec.	34.0 to 42.0	36.6	Pass
Maximum "D" Plane Rotation	Maximum	Degrees	64.0 to 78.0	74.0	Pass
	Time	Msec.	57.0 to 64.0	60.1	Pass
"D" Plane Rotation Decay, Time To Zero Crossing		Msec.	113.0 to 128.0	120.1	Pass
Moment About Occipital Condyle	Maximum	N•m	84.1 to 108.5	91.1	Pass
	Time	Msec.	47.0 to 58.0	48.4	Pass
Positive Moment Decay, Time To Zero Crossing		Msec.	97.0 to 107.0	101.1	Pass
Overall Test Results					Pass

Laboratory Technician


February 12, 2001

Test Date

Approved By

Date

E-11

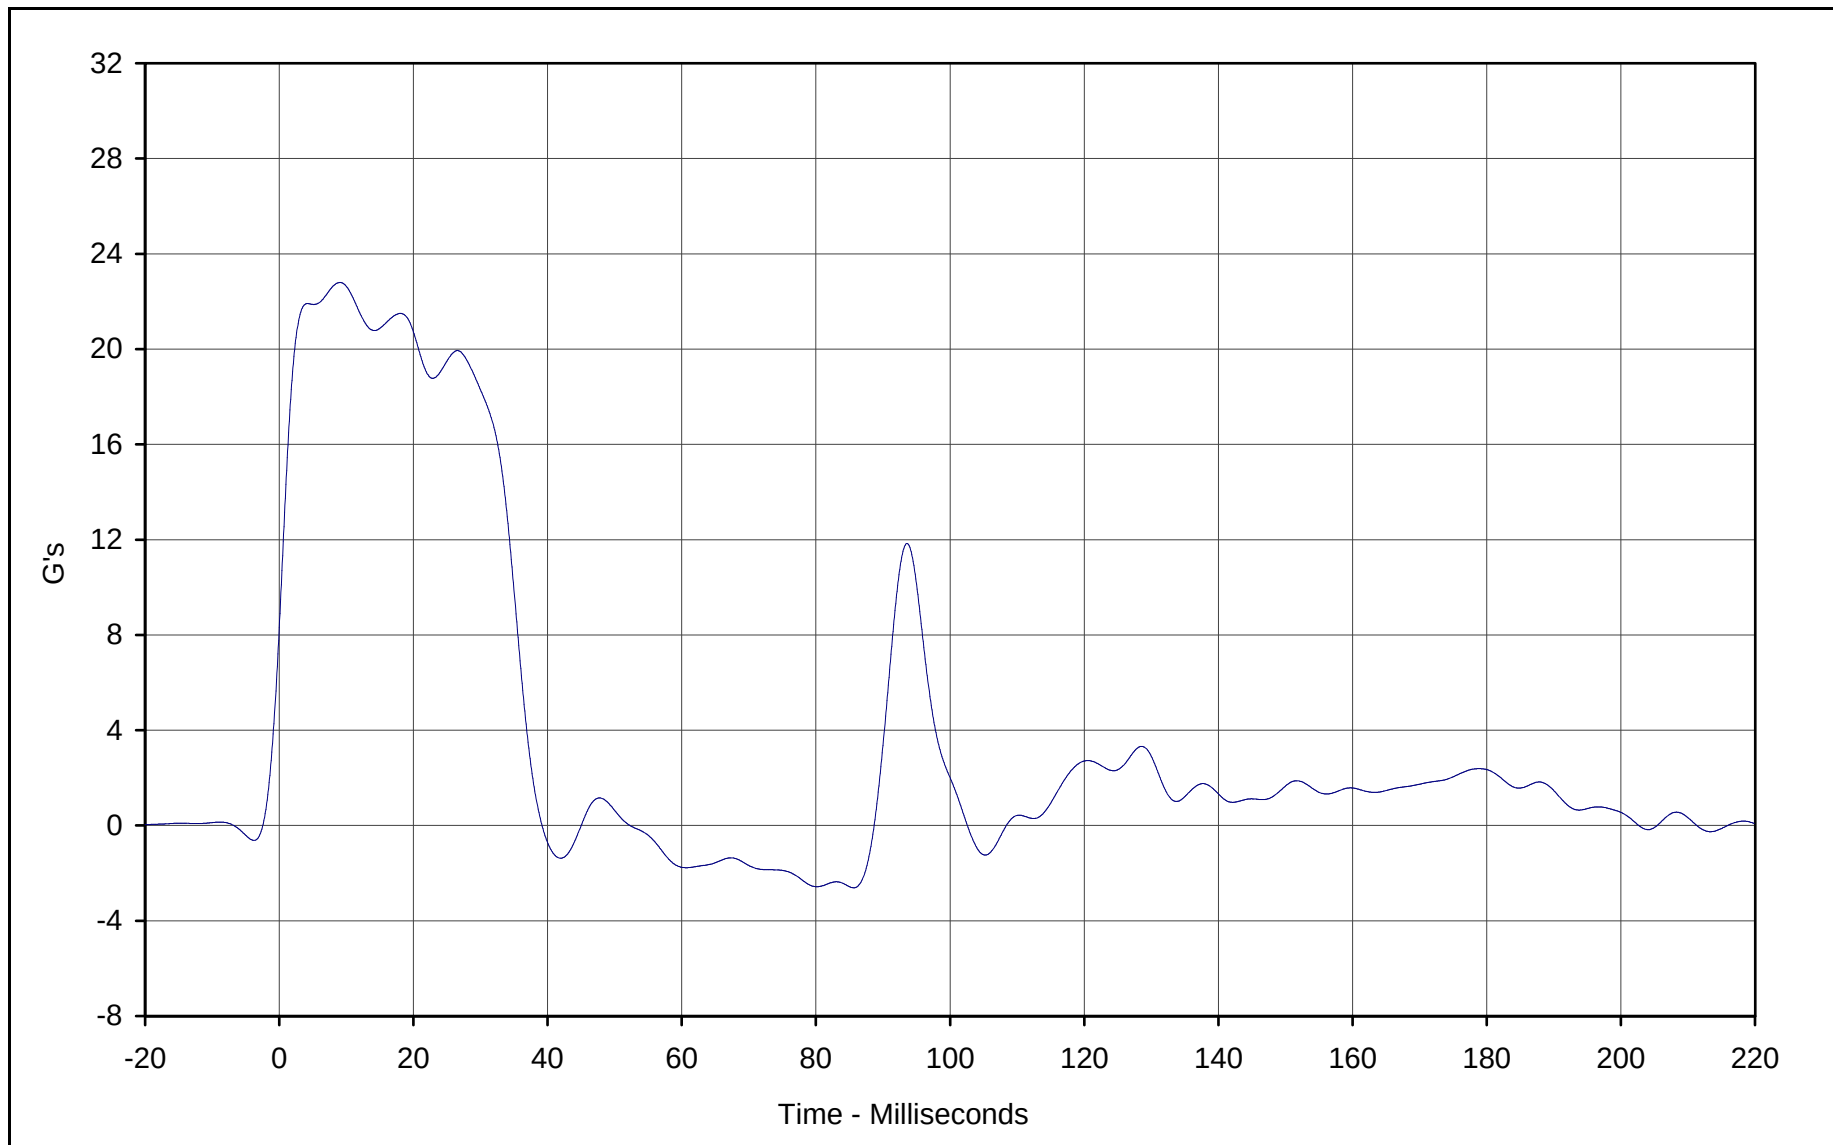

Curve Description:	Pendulum Deceleration		
Maximum Value:	22.8	at	9.1 Milliseconds
Minimum Value:	-2.6	at	85.6 Milliseconds
SAE Filter Class:	60		
Date of Test:	2/12/01		
ATD Serial No.:	034		


Testing Program:	Hybrid III Neck Flexion Test (Male)
------------------	-------------------------------------

Test Information:	S/N of Part: N/A Test I.D.: NF02E
-------------------	-----------------------------------



KAR21001-10

E-12

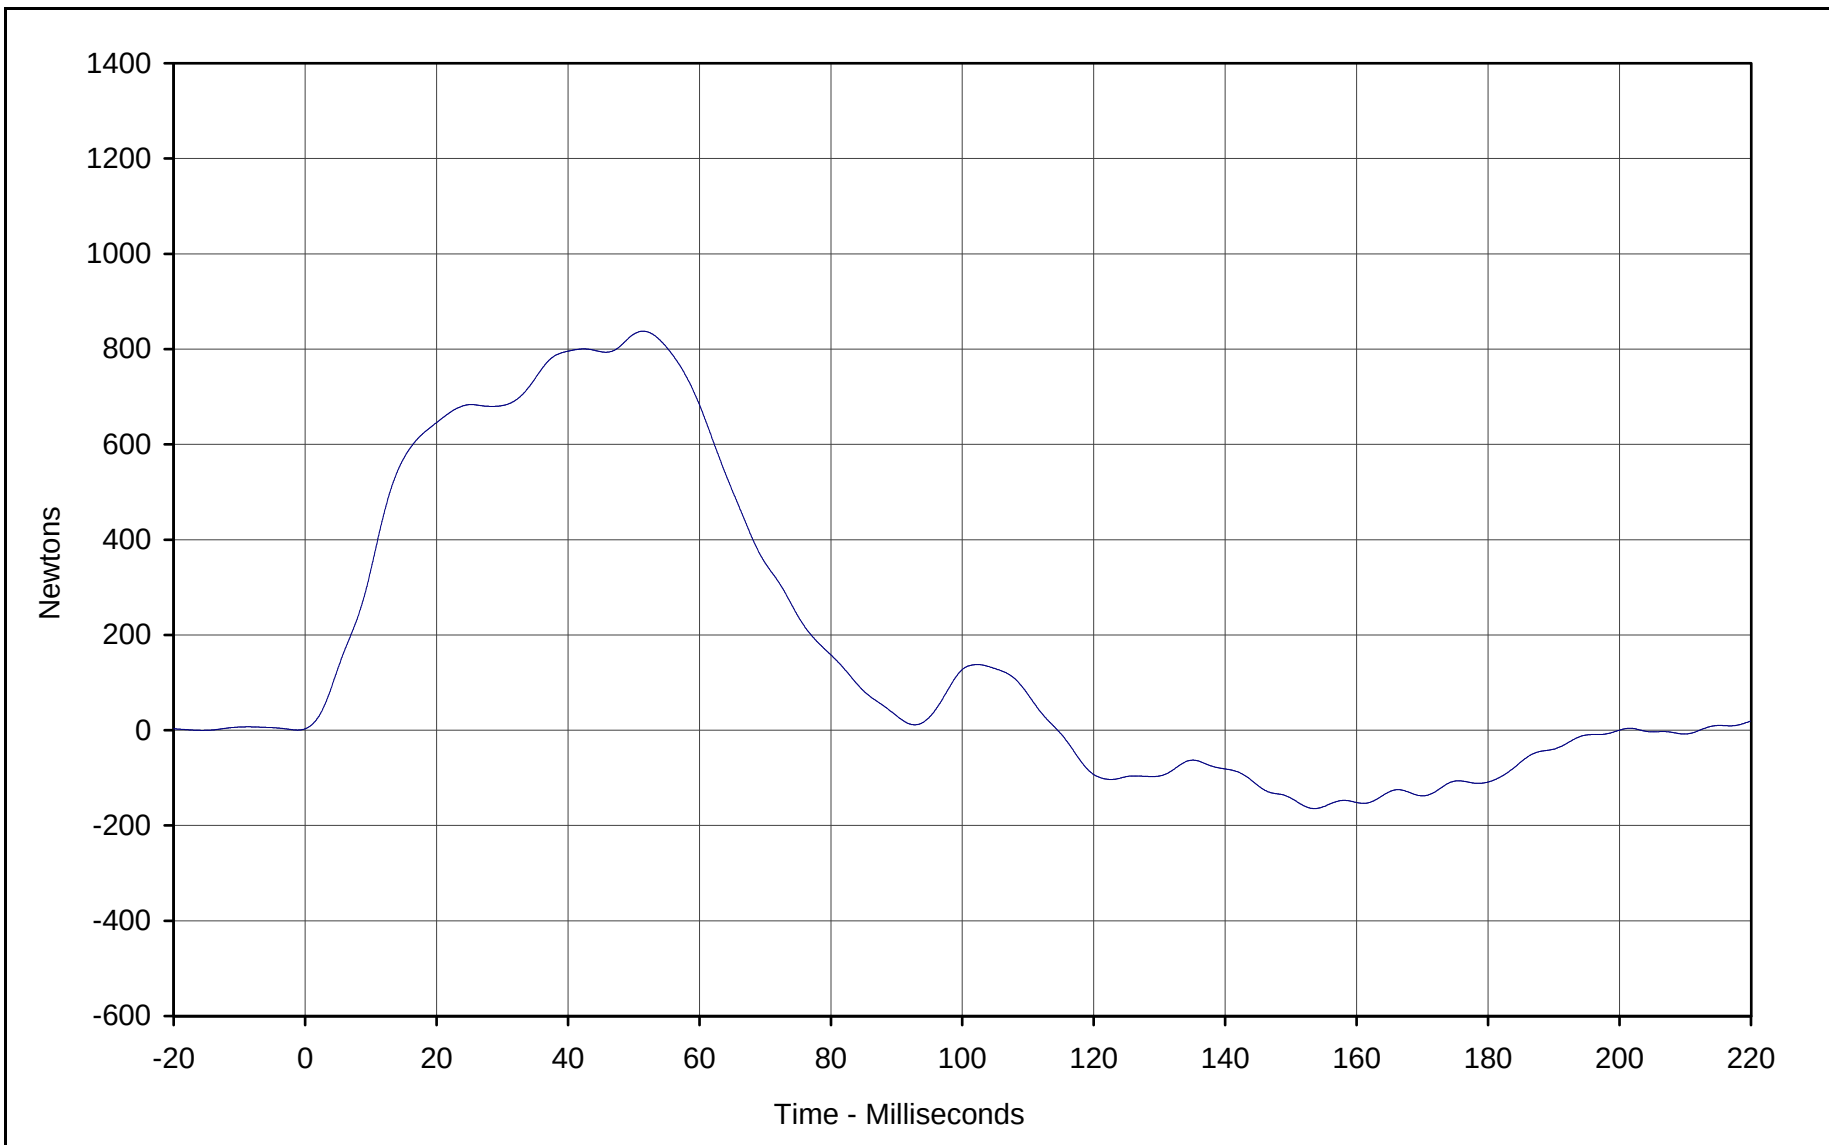

Curve Description: Neck Force X


Maximum Value:	837.5	at	51.4	Milliseconds
Minimum Value:	-164.5	at	153.6	Milliseconds
SAE Filter Class:	60			
Date of Test:	2/12/01			
ATD Serial No.:	034			

Testing Program: Hybrid III Neck Flexion Test (Male)

Test Information: S/N of Part: N/A Test I.D.: NF02E



KAR21001-10

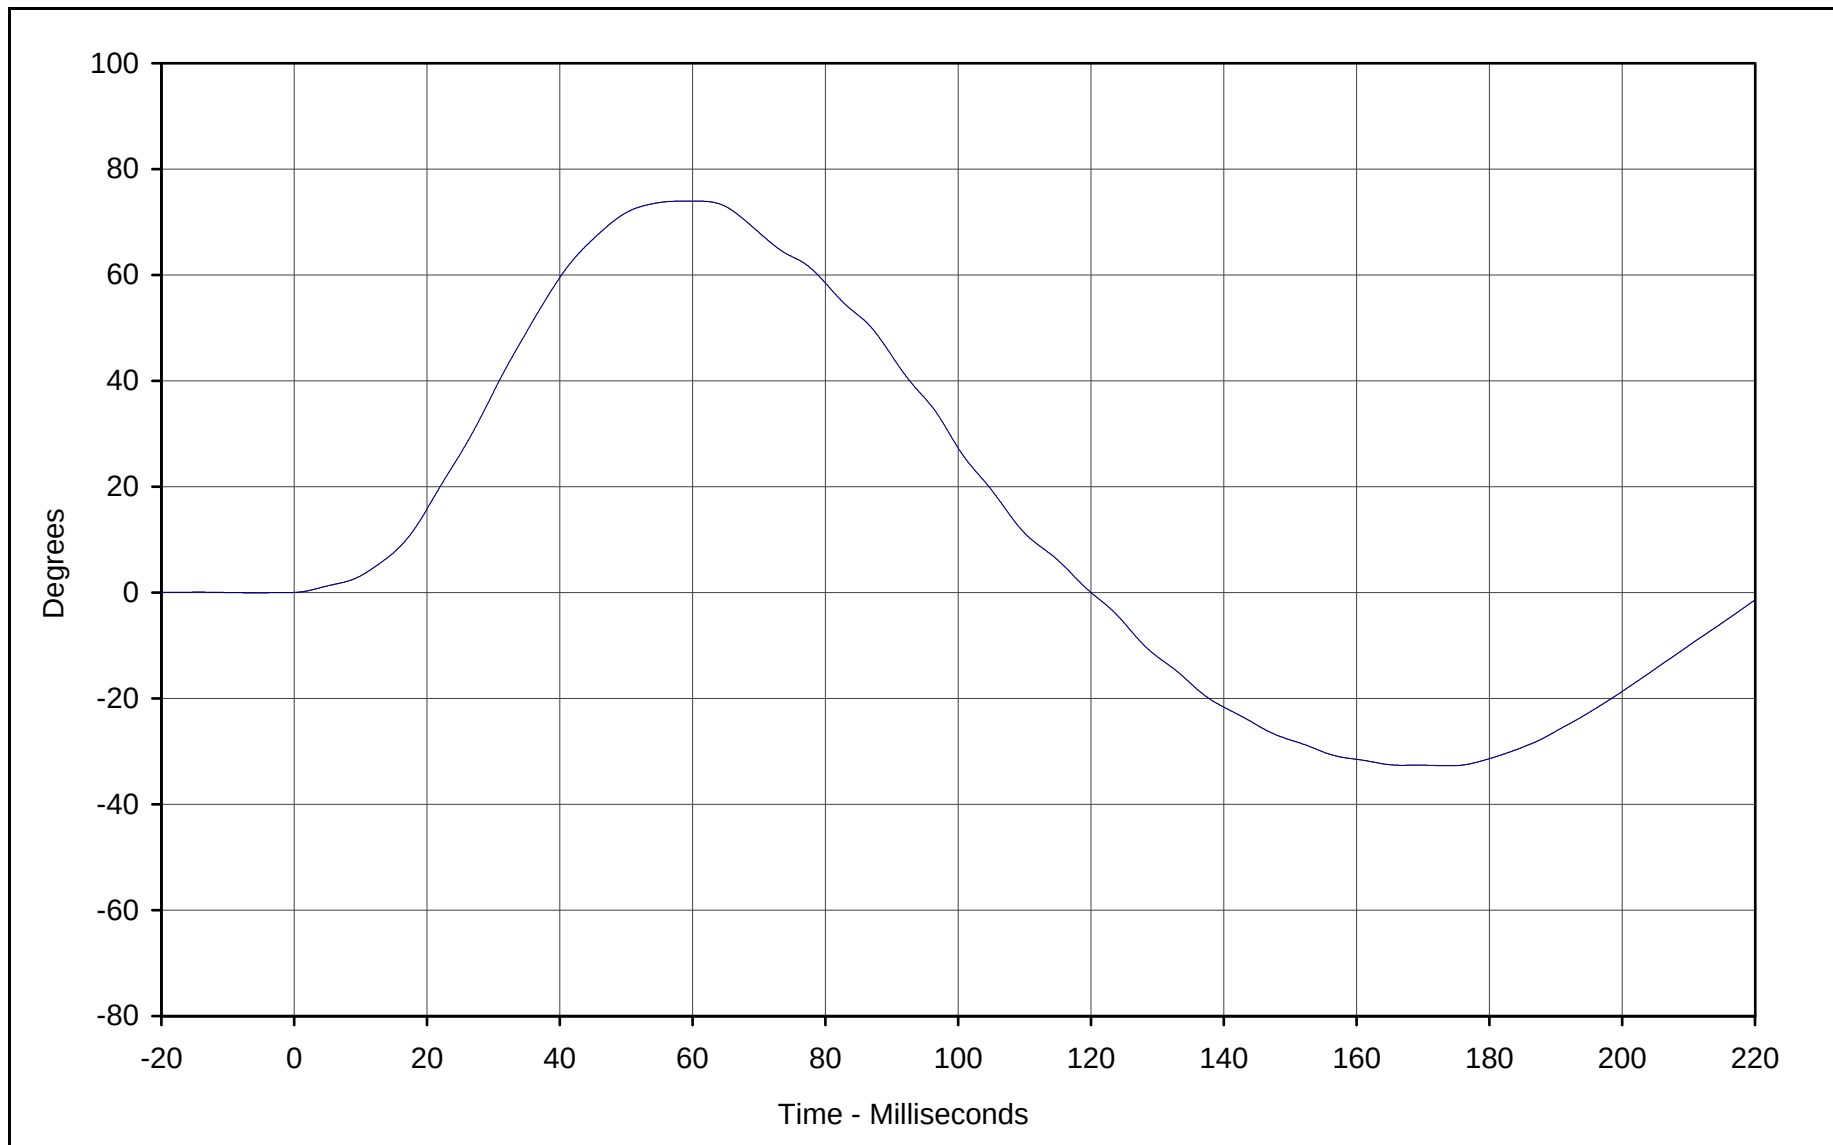


Curve Description: "D" Plane Rotation

Maximum Value:	74.0	at	60.1	Milliseconds
Minimum Value:	-32.7	at	173.8	Milliseconds
SAE Filter Class:	60			
Date of Test:	2/12/01			
ATD Serial No.:	034			

Testing Program: Hybrid III Neck Flexion Test (Male)

Test Information: S/N of Part: N/A Test I.D.: NF02E



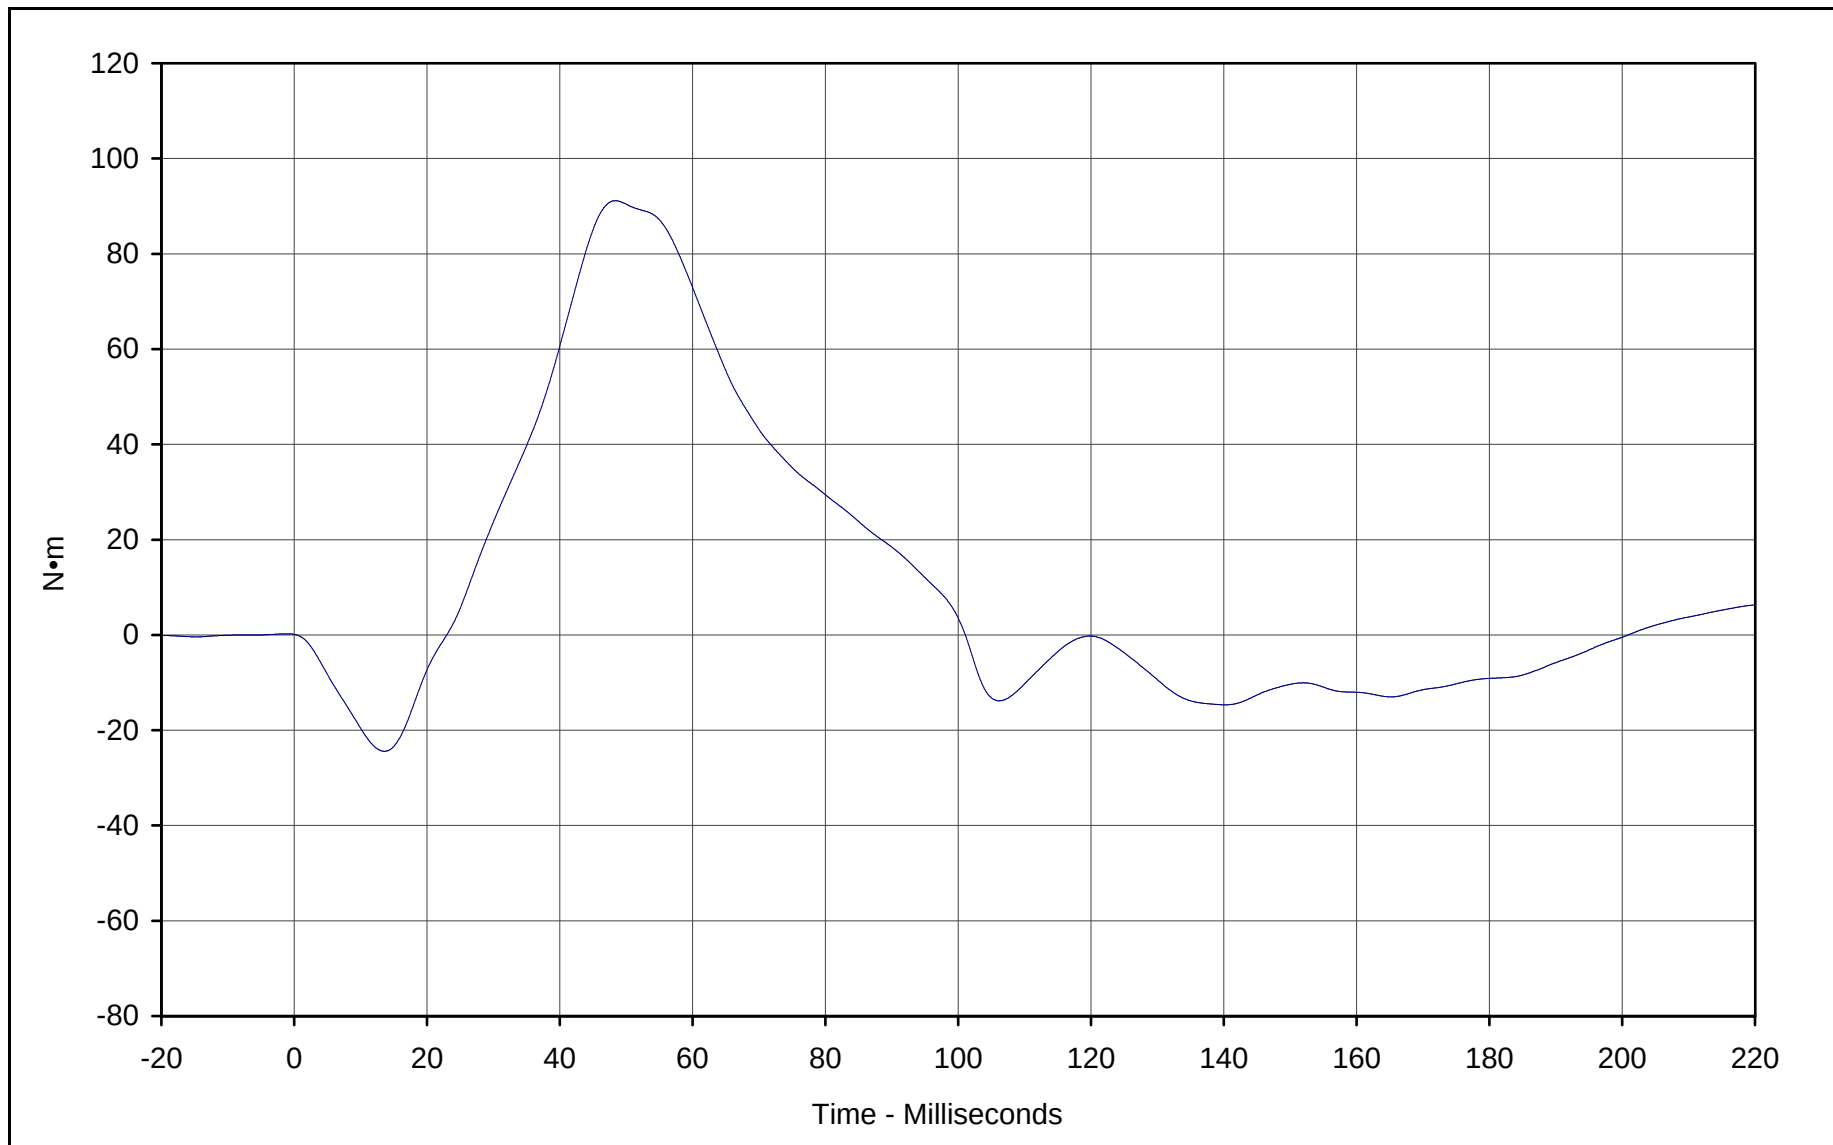

Curve Description: Moment About Occipital Condyles

Maximum Value: 91.1 at 48.4 Milliseconds

Minimum Value: -24.4 at 13.6 Milliseconds

SAE Filter Class: 60

Date of Test: 2/12/01

ATD Serial No.: 034

Testing Program: Hybrid III Neck Flexion Test (Male)

Test Information: S/N of Part: N/A Test I.D.: NF02E





Hybrid III Calibration Data Sheet

50TH Percentile Male

Neck Extension Test

ATD Serial No.: 034

Part Serial No.: N/A

Test I.D.: NE02E

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Velocity		m/s	5.95 to 6.19	5.97	Pass
Pendulum Deceleration	10 Msec.	G's	17.2 to 21.2	18.6	Pass
	20 Msec.	G's	14.0 to 19.0	17.7	Pass
	30 Msec.	G's	11.0 to 16.0	15.7	Pass
Peak Pendulum Decel. after 30 Msec.		G's	≤ 22.0	15.7	Pass
Deceleration Decay, Time to Cross 5 G's		Msec.	38.0 to 46.0	43.8	Pass
Maximum "D" Plane Rotation	Maximum	Degrees	81.0 to 106.0	99.3	Pass
	Time	Msec.	72.0 to 82.0	81.6	Pass
"D" Plane Rotation Decay, Time To Zero Crossing		Msec.	147.0 to 174.0	161.6	Pass
Moment About Occipital Condyle	Maximum	N•m	-52.9 to- 79.9	-62.5	Pass
	Time	Msec.	65.0 to 79.0	73.9	Pass
Negative Moment Decay, Time To Zero Crossing		Msec.	120.0 to 148.0	143.2	Pass
Overall Test Results					Pass


Laboratory Technician

February 12, 2001

Test Date

Approved By

Date

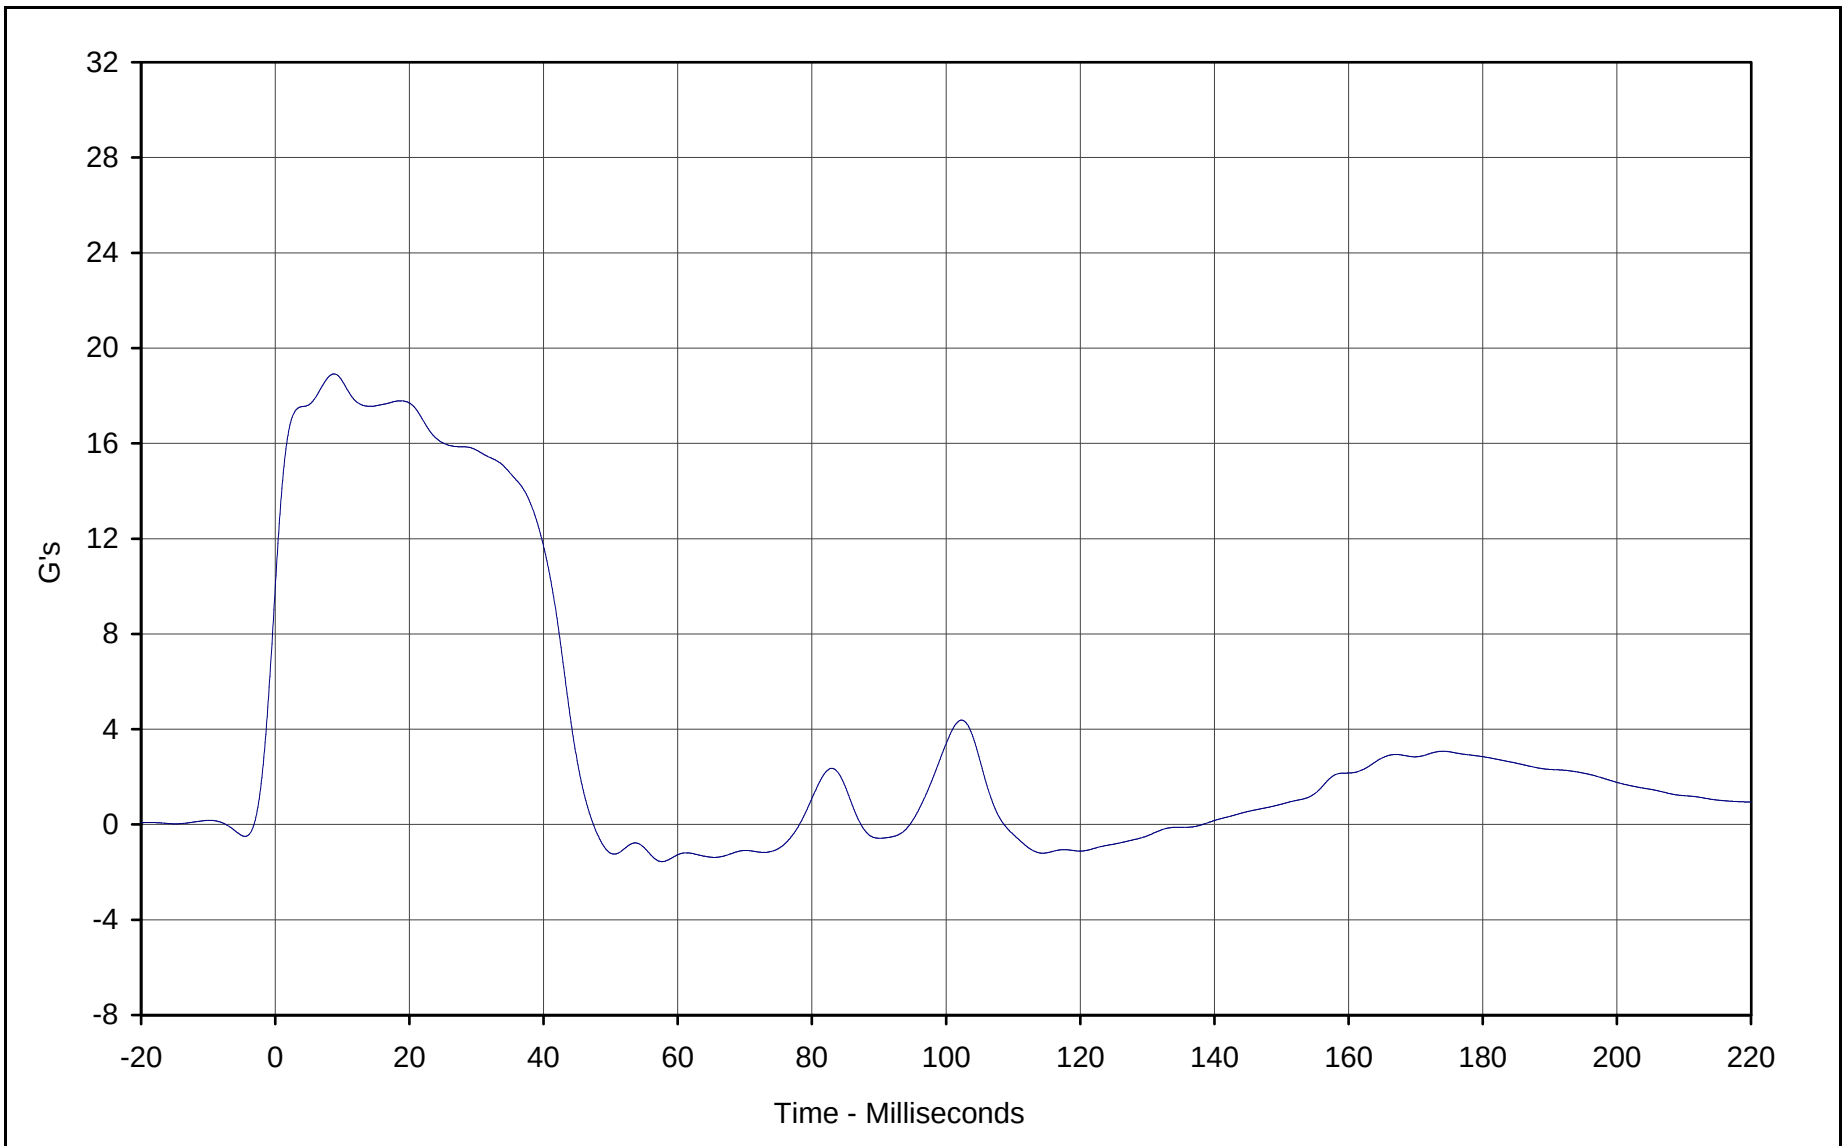


Curve Description: Pendulum Deceleration

Maximum Value:	18.9	at	8.8	Milliseconds
Minimum Value:	-1.6	at	57.7	Milliseconds
SAE Filter Class:	60			
Date of Test:	2/12/01			
ATD Serial No.:	034			

Testing Program: Hybrid III Neck Extension Test (Male)

Test Information: S/N of Part: N/A Test I.D.: NE02E



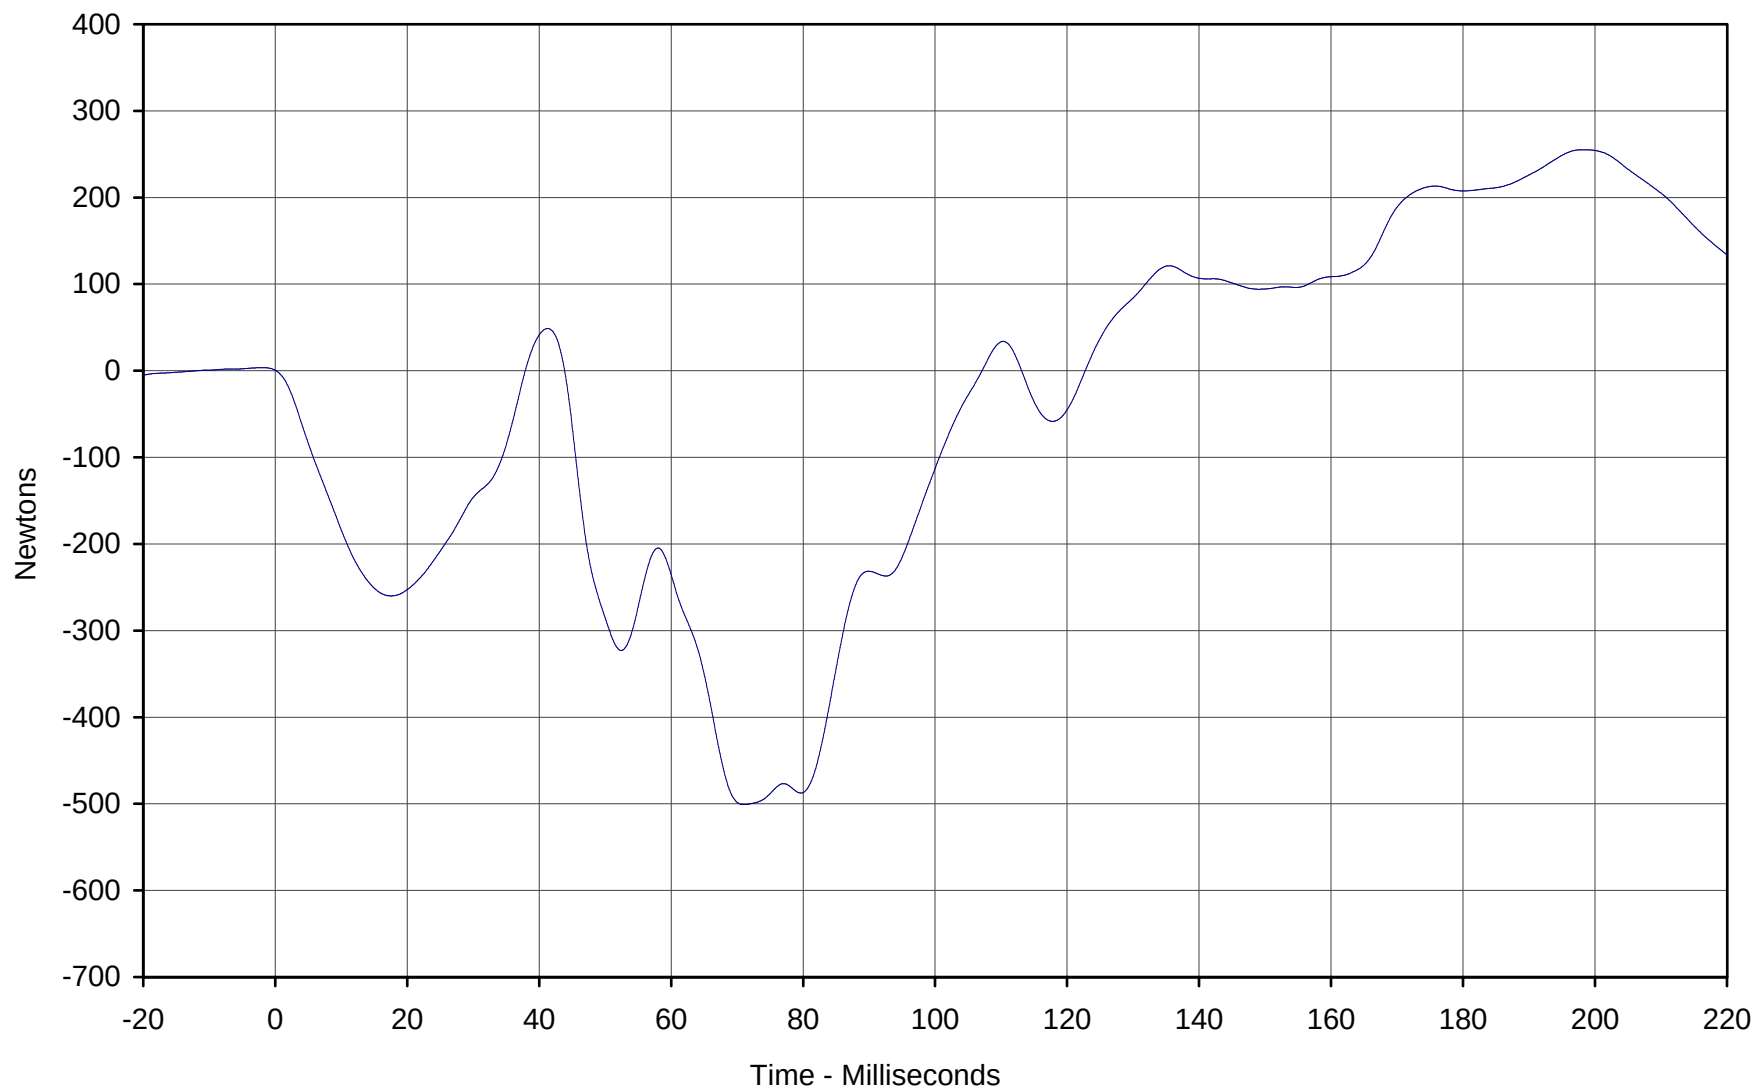


Curve Description: Neck Force X

Maximum Value:	255.1	at	198.3	Milliseconds
Minimum Value:	-500.9	at	71.0	Milliseconds
SAE Filter Class:	60			
Date of Test:	2/12/01			
ATD Serial No.:	034			

Testing Program: Hybrid III Neck Extension Test (Male)

Test Information: S/N of Part: N/A Test I.D.: NE02E



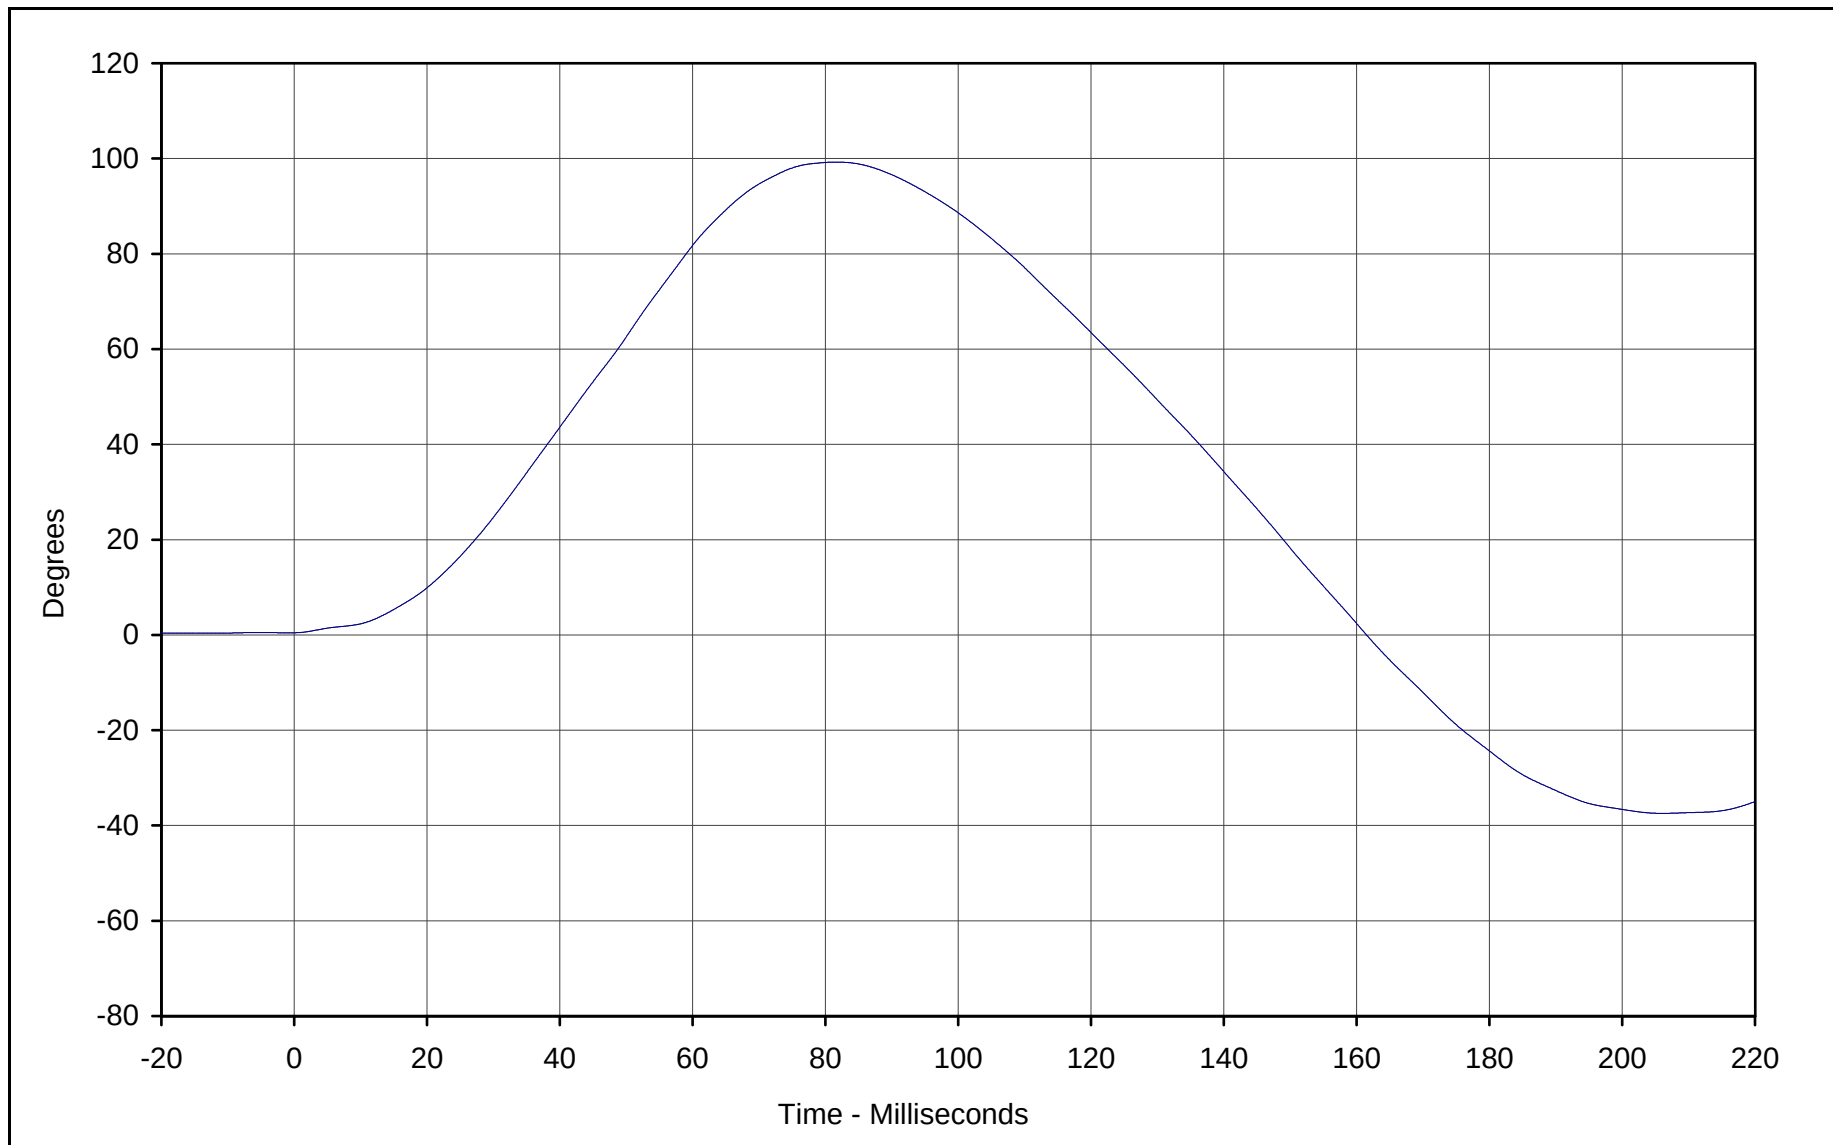


Curve Description: "D" Plane Rotation

Maximum Value:	99.3	at	81.6	Milliseconds
Minimum Value:	-37.4	at	206.1	Milliseconds
SAE Filter Class:	60			
Date of Test:	2/12/01			
ATD Serial No.:	034			

Testing Program: Hybrid III Neck Extension Test (Male)

Test Information: S/N of Part: N/A Test I.D.: NE02E



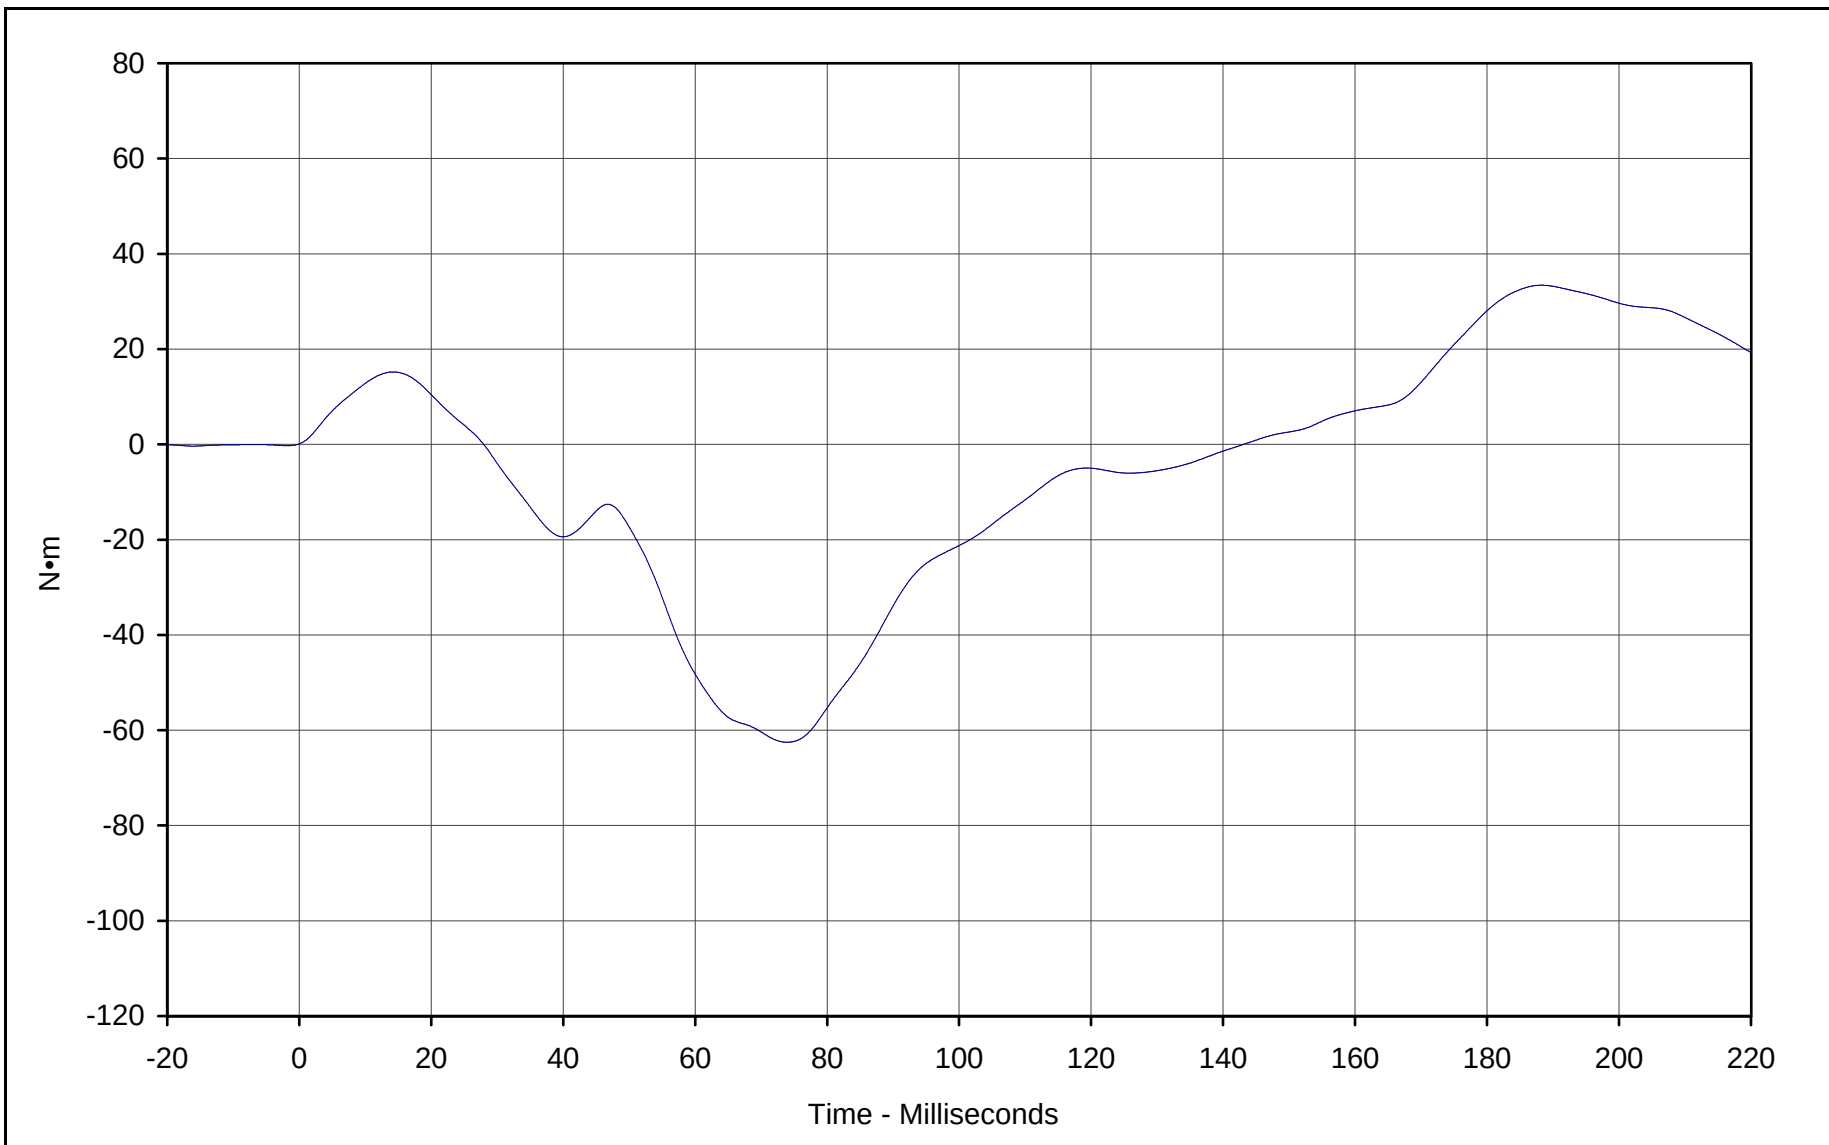

Curve Description: Moment About Occipital Condyles

Maximum Value: 33.4 at 188.2 Milliseconds

Minimum Value: -62.5 at 73.9 Milliseconds

SAE Filter Class: 60

Date of Test: 2/12/01

ATD Serial No.: 034

Testing Program: Hybrid III Neck Extension Test (Male)

Test Information: S/N of Part: N/A Test I.D.: NE02E





Hybrid III Calibration Data Sheet

50TH Percentile Male

External Measurements

ATD Serial No.: 034

Part Serial No.: N/A

Test I.D.: N/A

External Measurement Data				
Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory temperature	°C	20.4 to 22.1	20.9	Pass
Laboratory relative humidity	%	10 to 70	43	Pass
A - Total sitting height	mm	879 to 889	885	Pass
B - Shoulder pivot height	mm	505 to 521	502	Pass
C - "H" point height	mm	84 to 89	87	Pass
D - "H" point from seat back	mm	135 to 140	135	Pass
E - Shoulder pivot from back	mm	84 to 94	92	Pass
F - Thigh clearance	mm	140 to 155	150	Pass
G - Elbow back to wrist pivot	mm	290 to 305	300	Pass
H - Skull cap to back line	mm	41 to 46	43	Pass
I - Shoulder to elbow length	mm	330 to 345	342	Pass
J - Elbow rest height	mm	190 to 211	204	Pass
K - Buttock to knee length	mm	579 to 604	585	Pass
L - Popliteal length	mm	429 to 455	434	Pass
M - Knee pivot height	mm	485 to 500	492	Pass
N - Buttock popliteal length	mm	452 to 477	470	Pass
O - Chest depth	mm	213 to 229	215	Pass
P - Foot length	mm	251 to 267	260	Pass
V - Shoulder breadth	mm	422 to 437	431	Pass
W - Foot breadth	mm	91 to 107	102	Pass
Y - Chest circumference	mm	970 to 1001	986	Pass
Z - Waist circumference	mm	836 to 866	850	Pass
AA - Location for chest circumference	mm	429 to 434	433	Pass
BB - Location for waist circumference	mm	226 to 231	229	Pass
Overall Test Results				Pass

Laboratory Technician

February 12, 2001

Test Date

Approved By

Date



Hybrid III Calibration Data Sheet

50TH Percentile Male

Left Knee Impact Test

ATD Serial No.: 035

Part Serial No.: N/A

Test I.D.: LK02D

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	18.9 to 25.5	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	2.073 to 2.134	2.113	Pass
Peak Probe Force	Newtons	4715 to 5782	5267.2	Pass
Overall Test Results				Pass


Laboratory Technician

February 12, 2001
Test Date

Approved By

Date

E-22

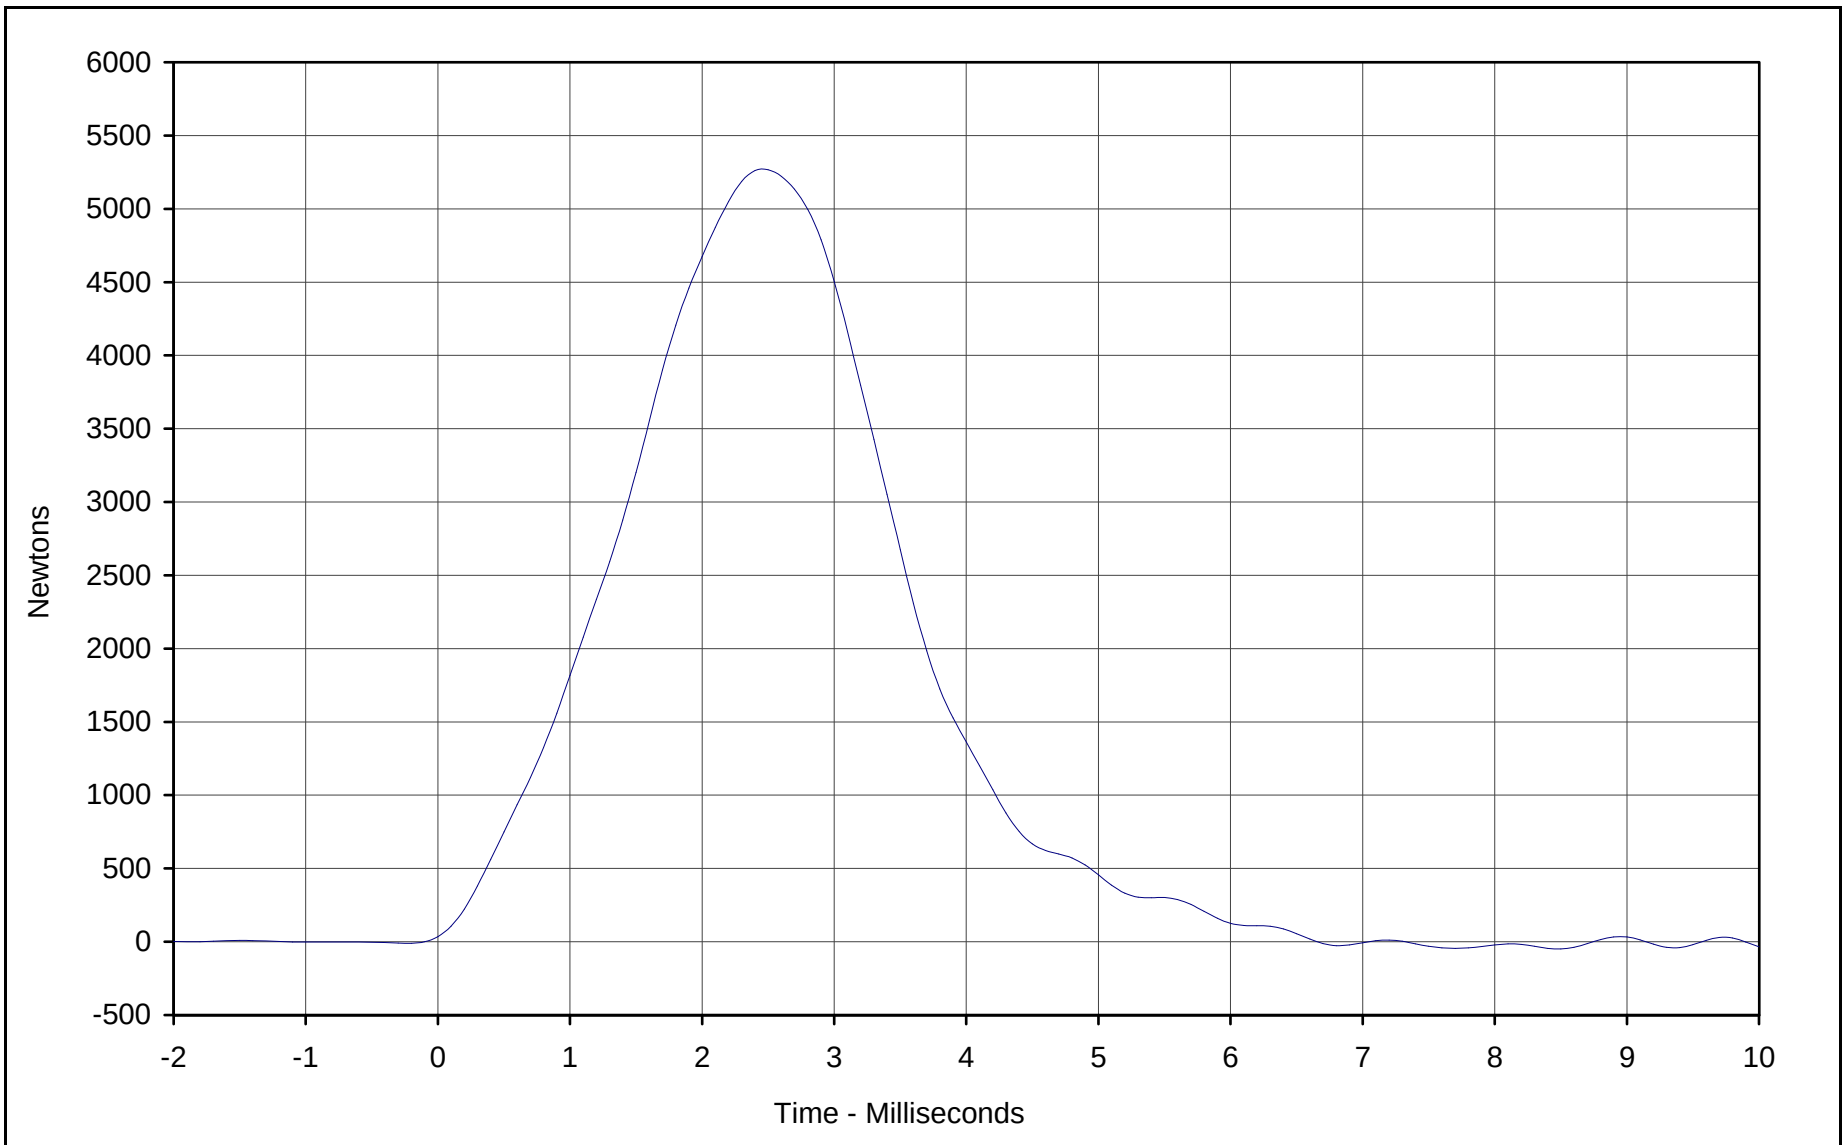

Curve Description: Probe Force

Maximum Value:	<u>5267.2</u>	at	<u>2.5</u>	Milliseconds
Minimum Value:	<u>-45.8</u>	at	<u>7.7</u>	Milliseconds
SAE Filter Class:	<u>600</u>			
Date of Test:	<u>2/12/01</u>			
ATD Serial No.:	<u>035</u>			

Testing Program: Hybrid III Left Knee Impact Test

Test Information: Part S/N: N/A Test I.D.: LK02D



KAR21001-10



Hybrid III Calibration Data Sheet

50TH Percentile Male

Right Knee Impact Test

ATD Serial No.: 035

Part Serial No.: N/A

Test I.D.: RK02D


Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	18.9 to 25.5	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	2.073 to 2.134	2.134	Pass
Peak Probe Force	Newtons	4715 to 5782	5299.2	Pass
Overall Test Results				Pass

Laboratory Technician

February 12, 2001
Test Date

Approved By

Date

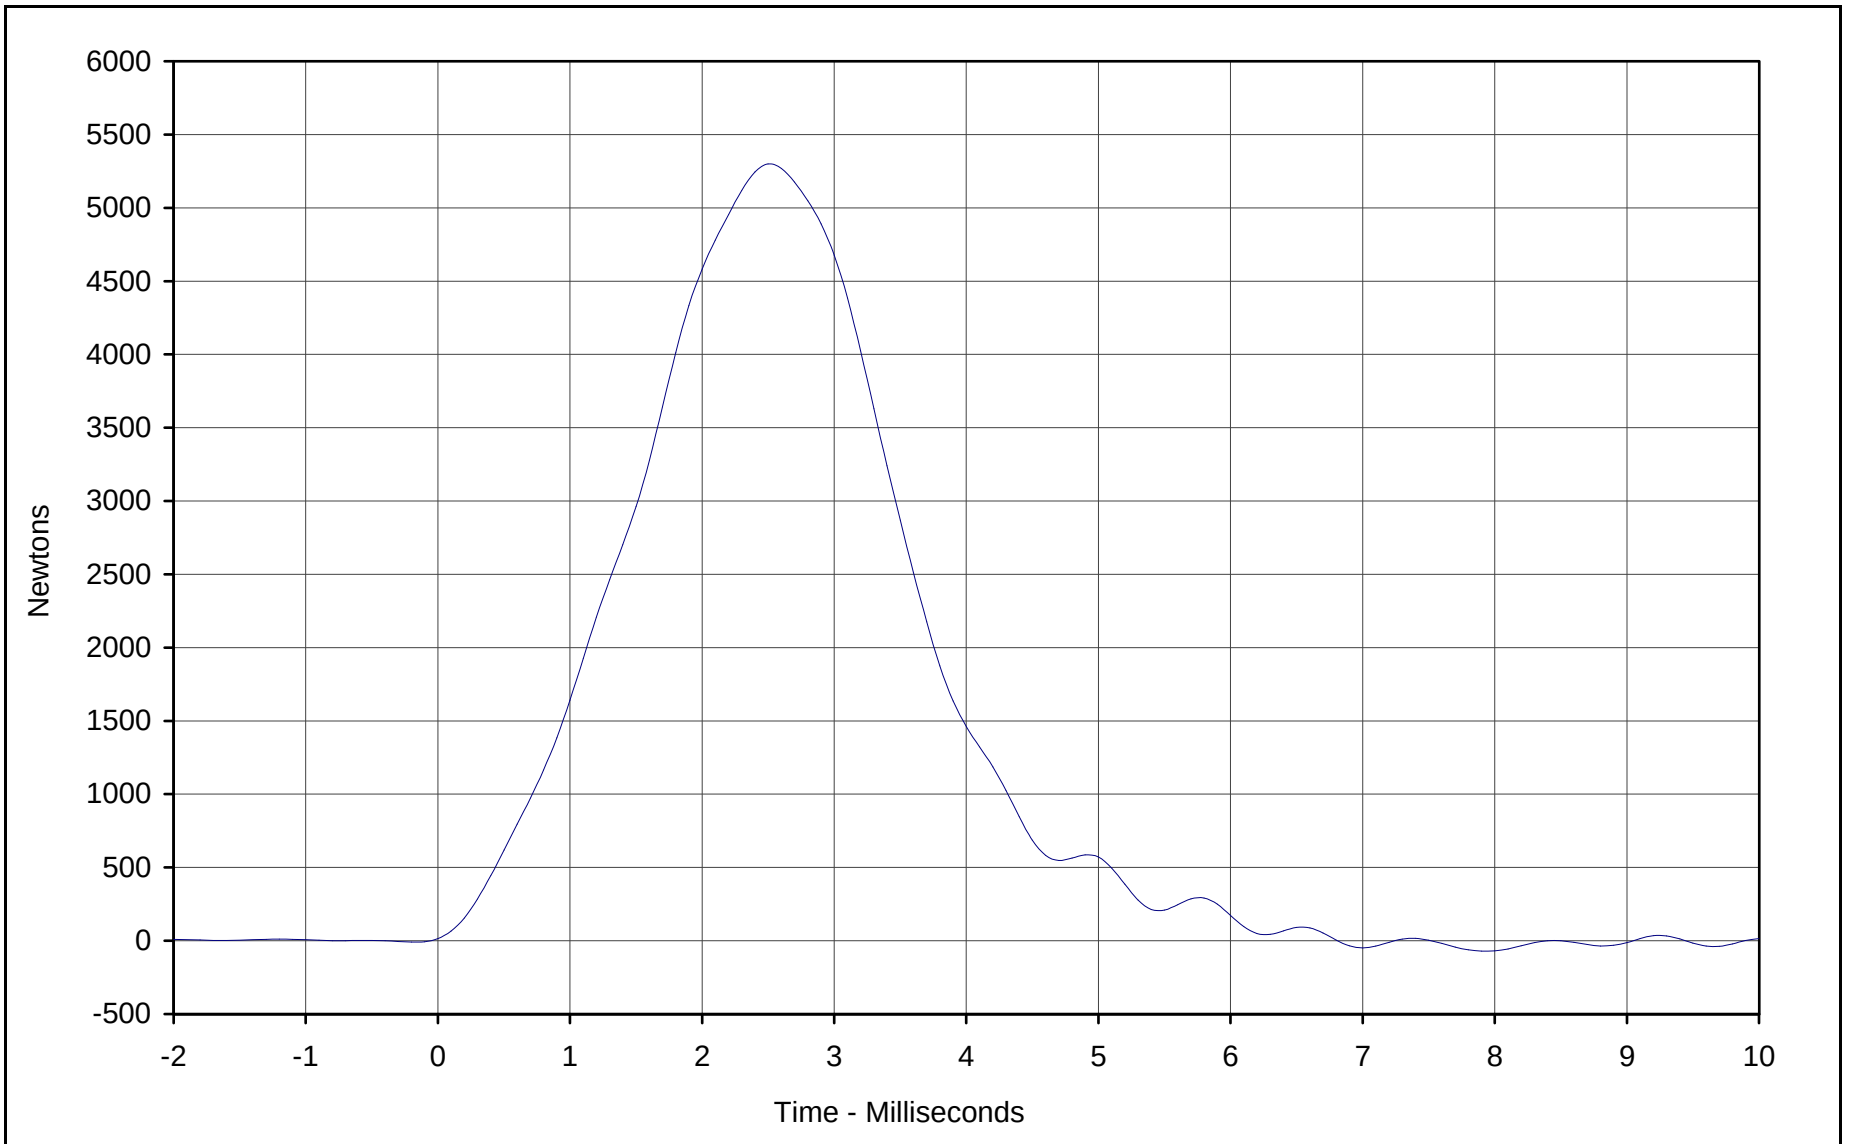

Curve Description: Probe Force

Maximum Value:	<u>5299.2</u>	at	<u>2.5</u>	Milliseconds
Minimum Value:	<u>-71.0</u>	at	<u>7.9</u>	Milliseconds
SAE Filter Class:	<u>600</u>			
Date of Test:	<u>2/12/01</u>			
ATD Serial No.:	<u>035</u>			

Testing Program: Hybrid III Right Knee Impact Test

Test Information: Part S/N: N/A Test I.D.: RK02D





Hybrid III Calibration Data Sheet

50TH Percentile Male

Head Drop Calibration

ATD Serial No.: 035

Part Serial No.: N/A

Test I.D.: HD01E-A

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	18.9 to 25.6	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Peak Resultant Acceleration	G's	225.0 to 275.0	229.4	Pass
Peak Lateral Acceleration	G's	≤15.0	11.1	Pass
Is Acceleration Unimodal?	Yes/No	Yes	Yes	Pass
Overall Test Results				Pass


Laboratory Technician

February 9, 2001

Test Date

Approved By

Date

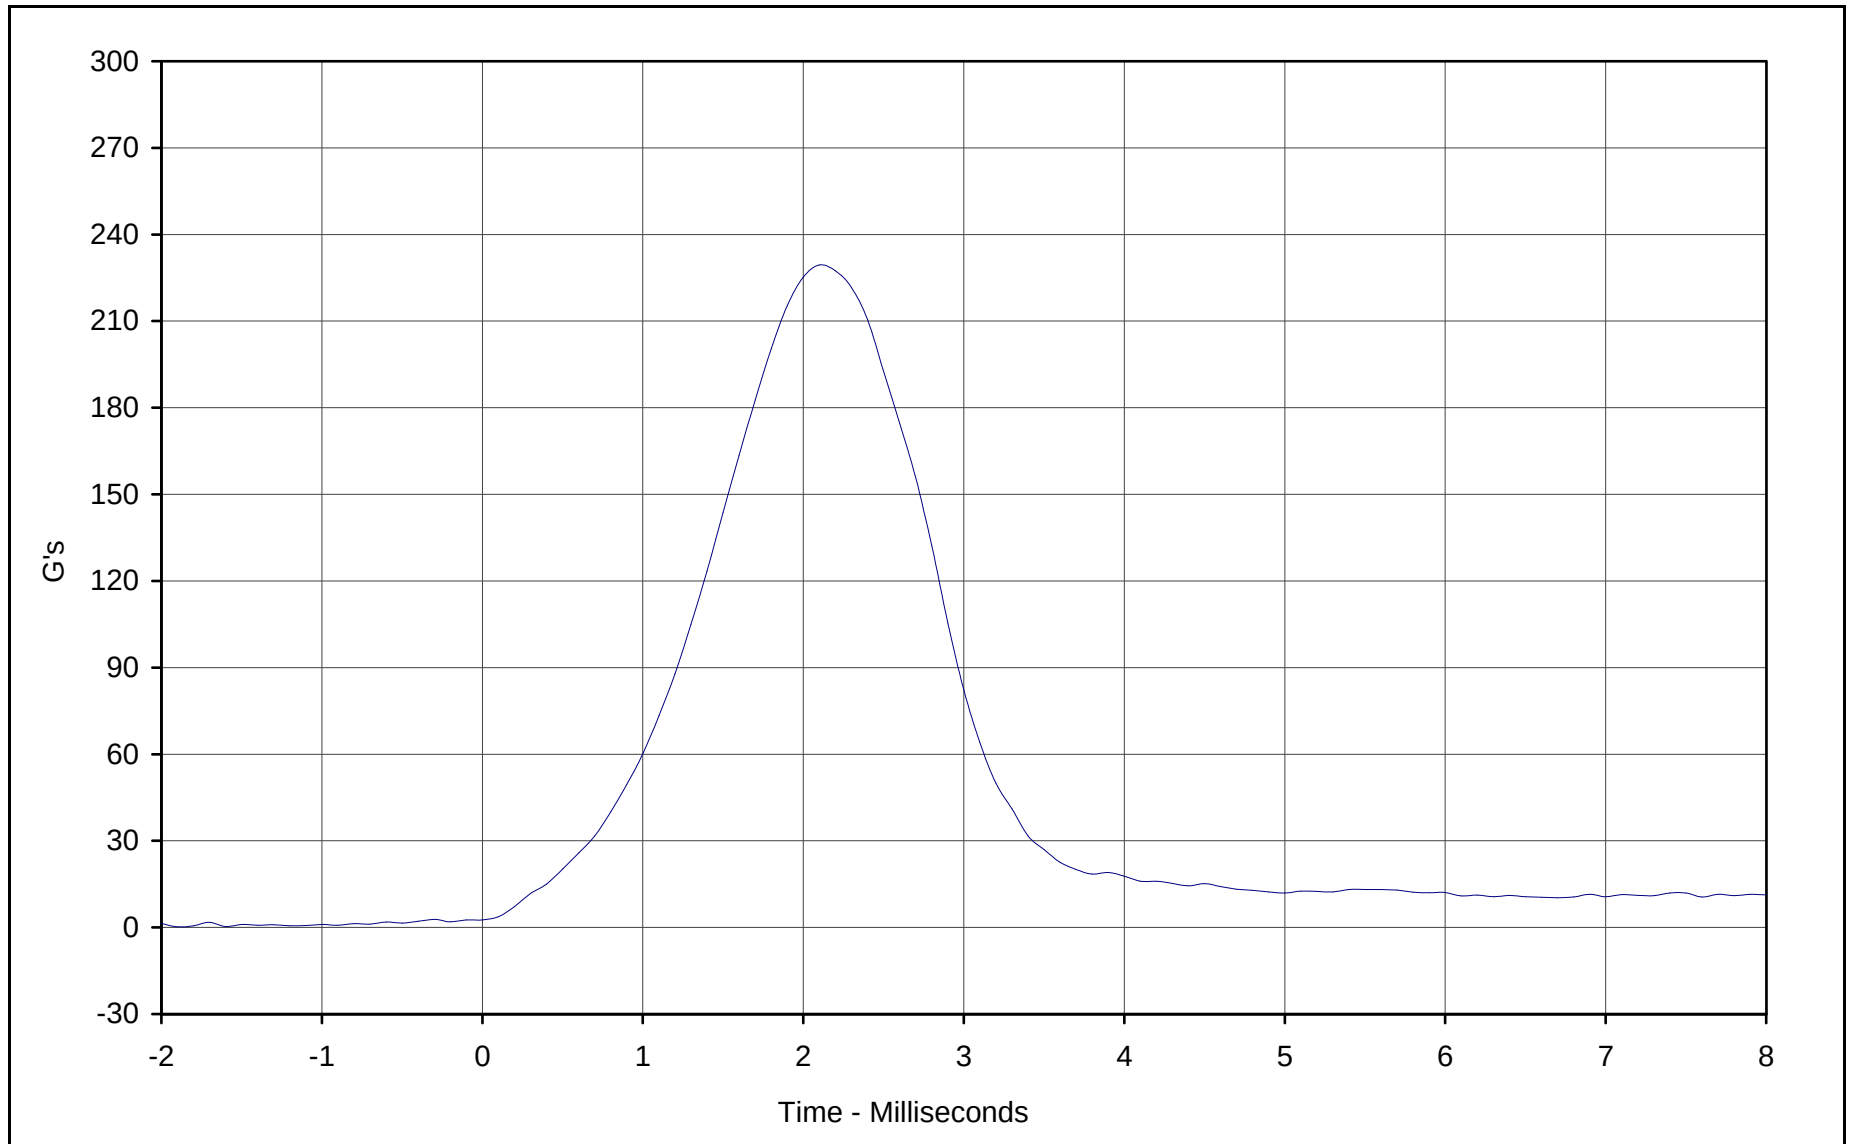


Curve Description: Head Resultant Acceleration

Maximum Value:	<u>229.4</u>	at	<u>2.1</u>	Milliseconds
Minimum Value:	<u>0.2</u>	at	<u>-1.9</u>	Milliseconds
SAE Filter Class:	<u>1000</u>			
Date of Test:	<u>2/9/01</u>			
ATD Serial No.:	<u>035</u>			

Testing Program: Hybrid III Head Drop Calibration (Male)

Test Information: S/N of Part: N/A Test I.D.: HD01E-A



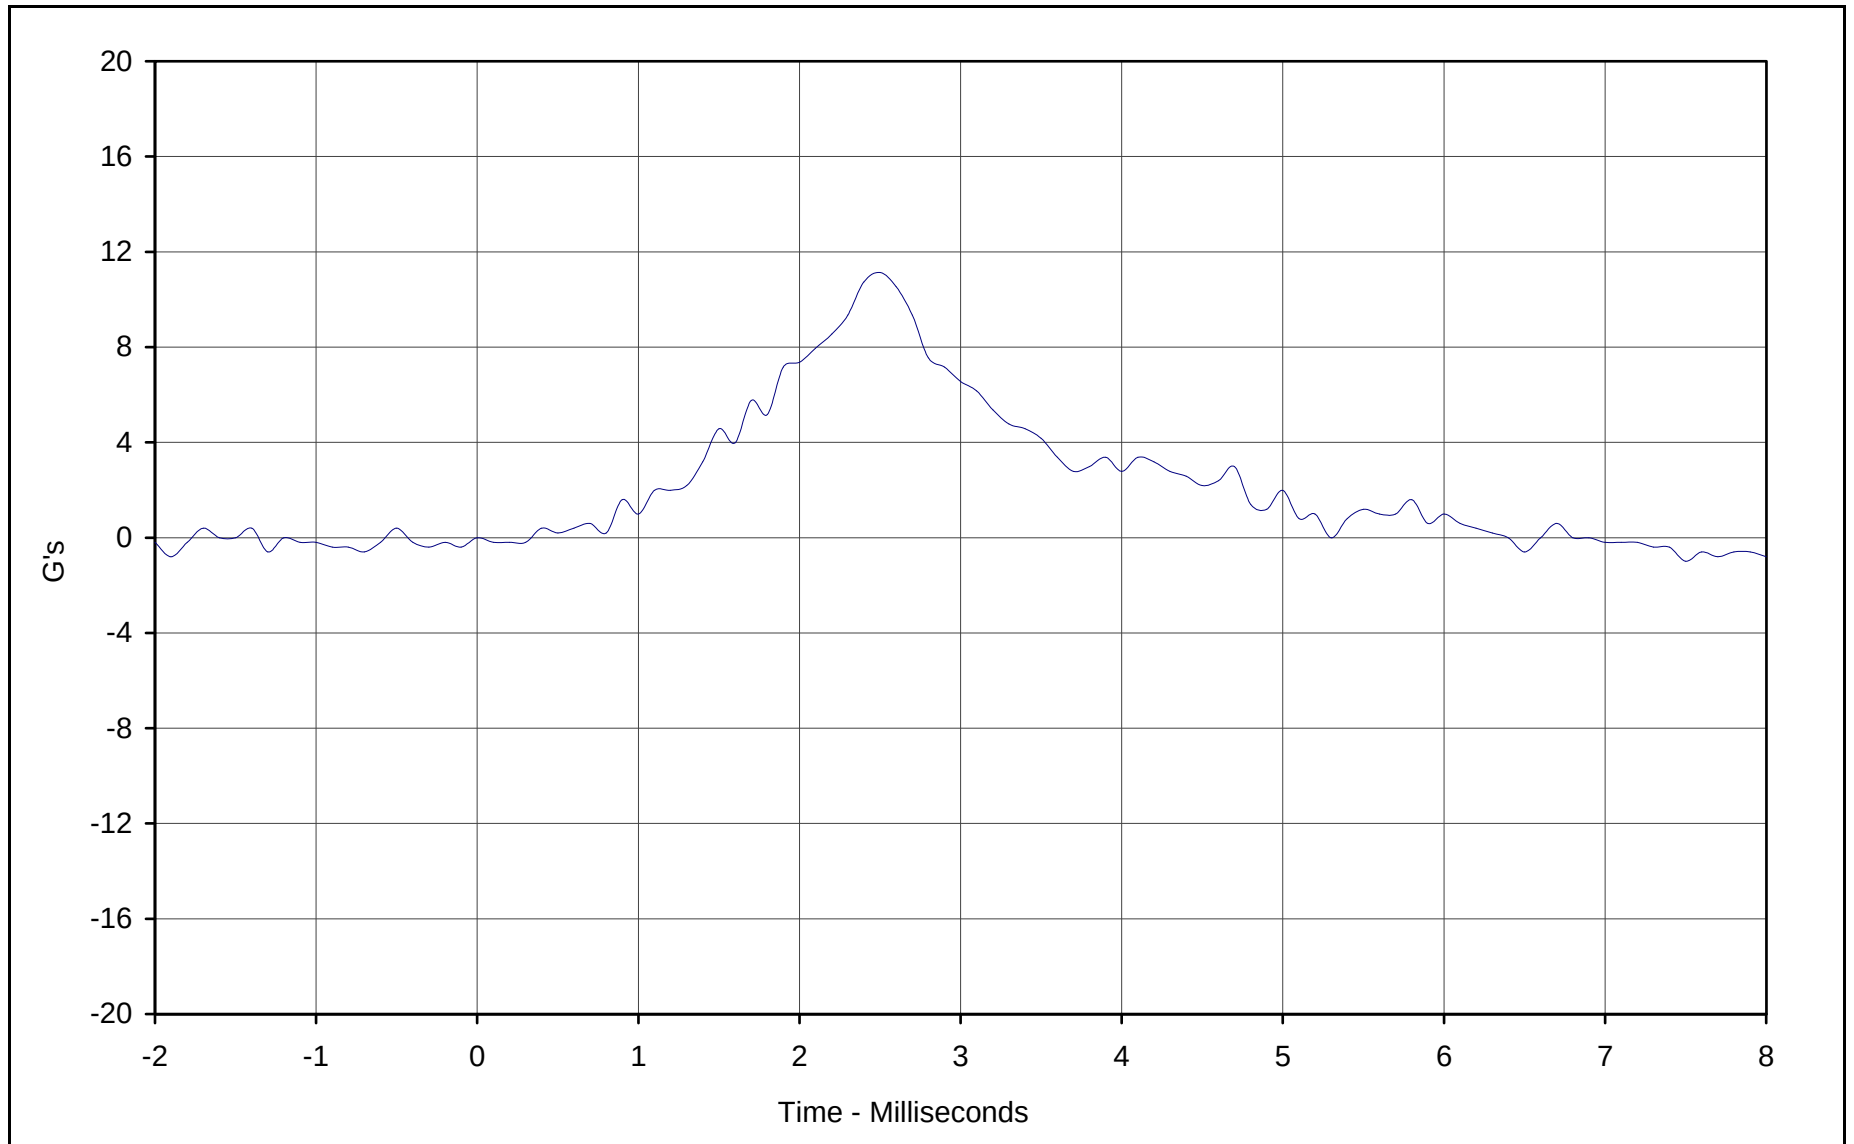

Curve Description: Head Acceleration Y Axis

Maximum Value: 11.1 at 2.5 Milliseconds

Minimum Value: -1.0 at 7.5 Milliseconds

SAE Filter Class: 1000

Date of Test: 2/9/01

ATD Serial No.: 035

Testing Program: Hybrid III Head Drop Calibration (Male)

Test Information: S/N of Part: N/A Test I.D.: HD01E-A





Hybrid III Calibration Data Sheet

50TH Percentile Male

Thorax Impact Test

ATD Serial No.: 035

Part Serial No.: N/A

Test I.D.: CH02Y

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	6.58 to 6.82	6.61	Pass
Peak Probe Force	Newtons	5159 to 5893	5669	Pass
Peak Sternum Displacement	CM	6.35 to 7.26	6.99	Pass
Internal Hysteresis	%	69 to 85	73.6	Pass
Overall Test Results				Pass


Laboratory Technician

February 10, 2001

Test Date

Approved By

Date

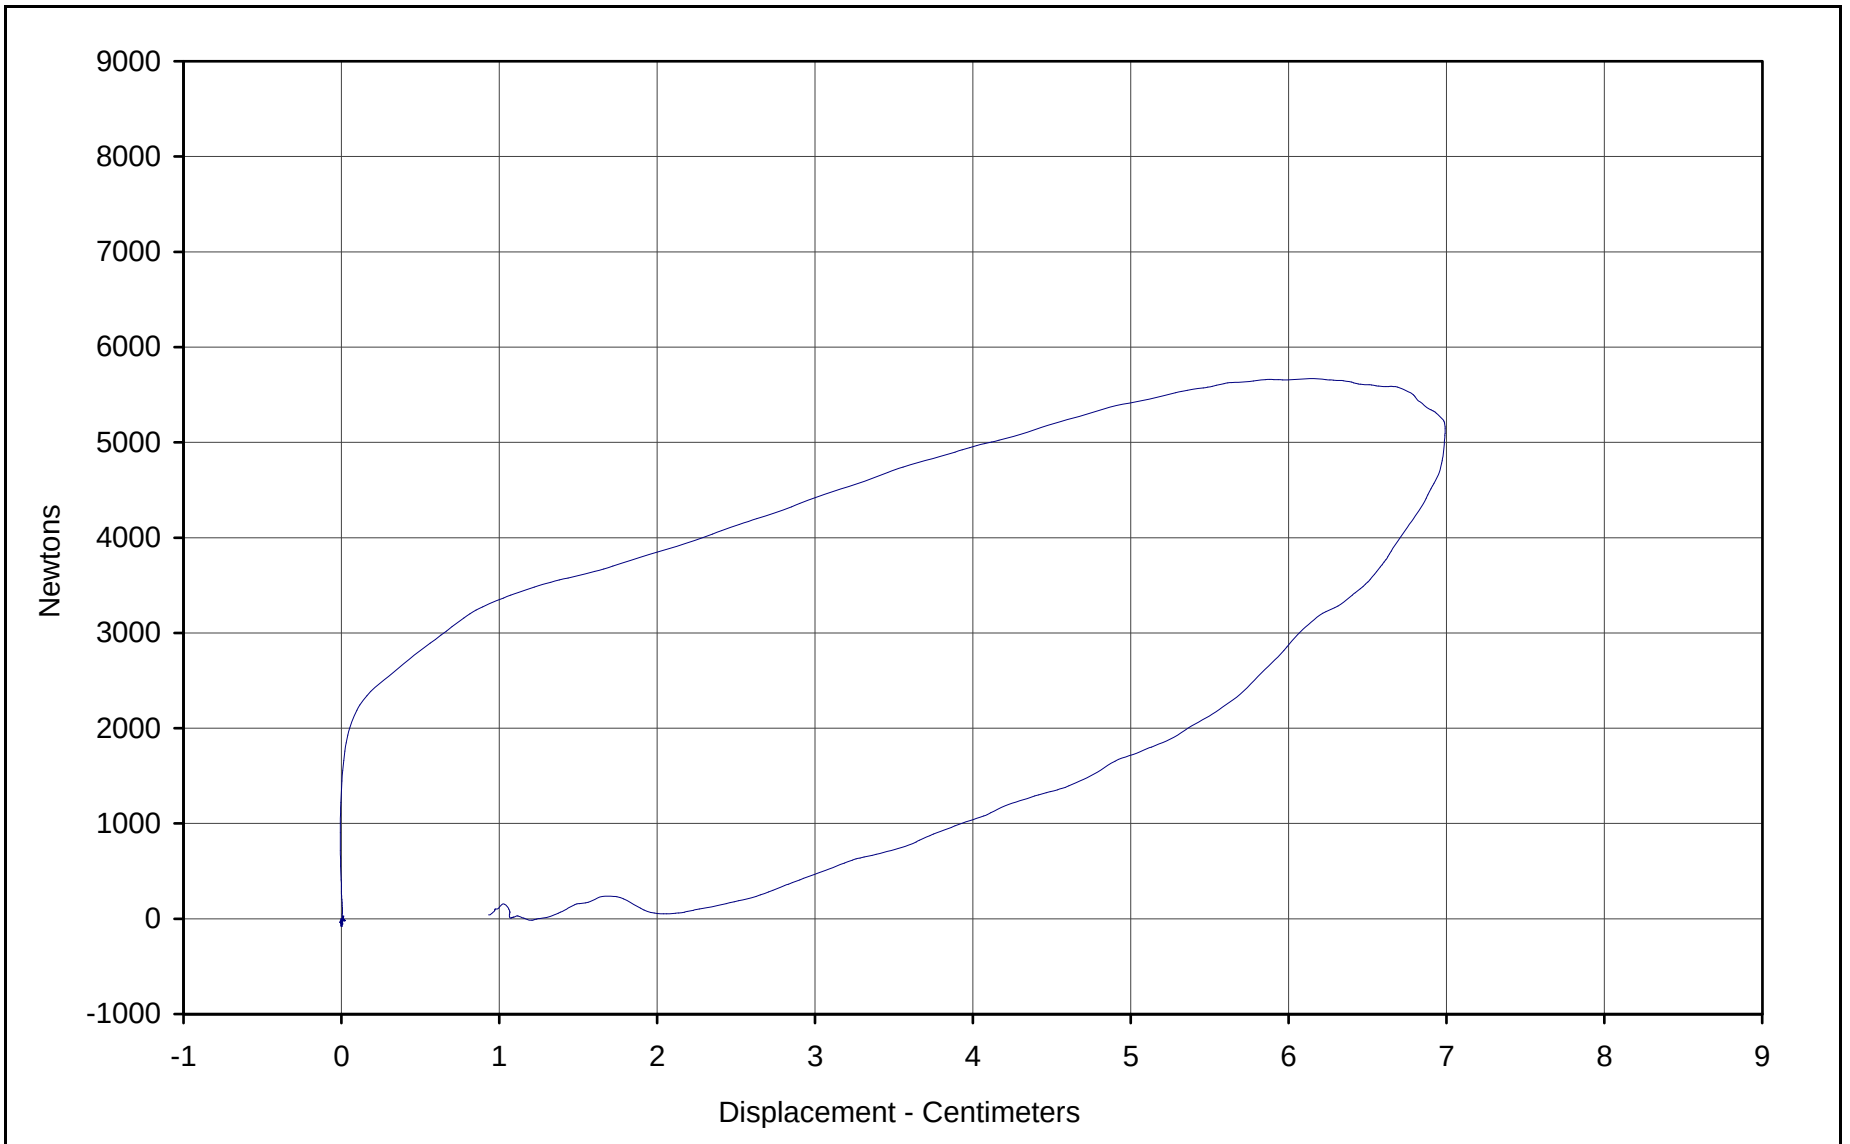

Curve Description: Probe Force vs. Chest Displacement

Probe Force: 5668.5 Newtons

Chest Displ.: 6.99 Centimeters

SAE Filter Class: 180

Date of Test: 2/10/01

ATD Serial No.: 035

Testing Program: Hybrid III Thorax Impact Test

Test Information: S/N of Part: N/A Test I.D.: CH02Y





Hybrid III Calibration Data Sheet

50TH Percentile Male

Neck Flexion Test

ATD Serial No.: 035

Part Serial No.: N/A

Test I.D.: NF02F

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Velocity		m/s	6.89 to 7.13	6.91	Pass
Pendulum Deceleration	10 Msec.	G's	22.5 to 27.5	23.5	Pass
	20 Msec.	G's	17.6 to 22.6	19.9	Pass
	30 Msec.	G's	12.5 to 18.5	17.5	Pass
Peak Pendulum Decel. after 30 Msec.		G's	≤ 29.0	17.5	Pass
Deceleration Decay, Time to Cross 5 G's		Msec.	34.0 to 42.0	39.9	Pass
Maximum "D" Plane Rotation	Maximum	Degrees	64.0 to 78.0	66.1	Pass
	Time	Msec.	57.0 to 64.0	58.6	Pass
"D" Plane Rotation Decay, Time To Zero Crossing		Msec.	113.0 to 128.0	115.5	Pass
Moment About Occipital Condyle	Maximum	N·m	84.1 to 108.5	89.1	Pass
	Time	Msec.	47.0 to 58.0	52.4	Pass
Positive Moment Decay, Time To Zero Crossing		Msec.	97.0 to 107.0	97.6	Pass
Overall Test Results					Pass


Laboratory Technician

February 12, 2001

Test Date

Approved By

Date

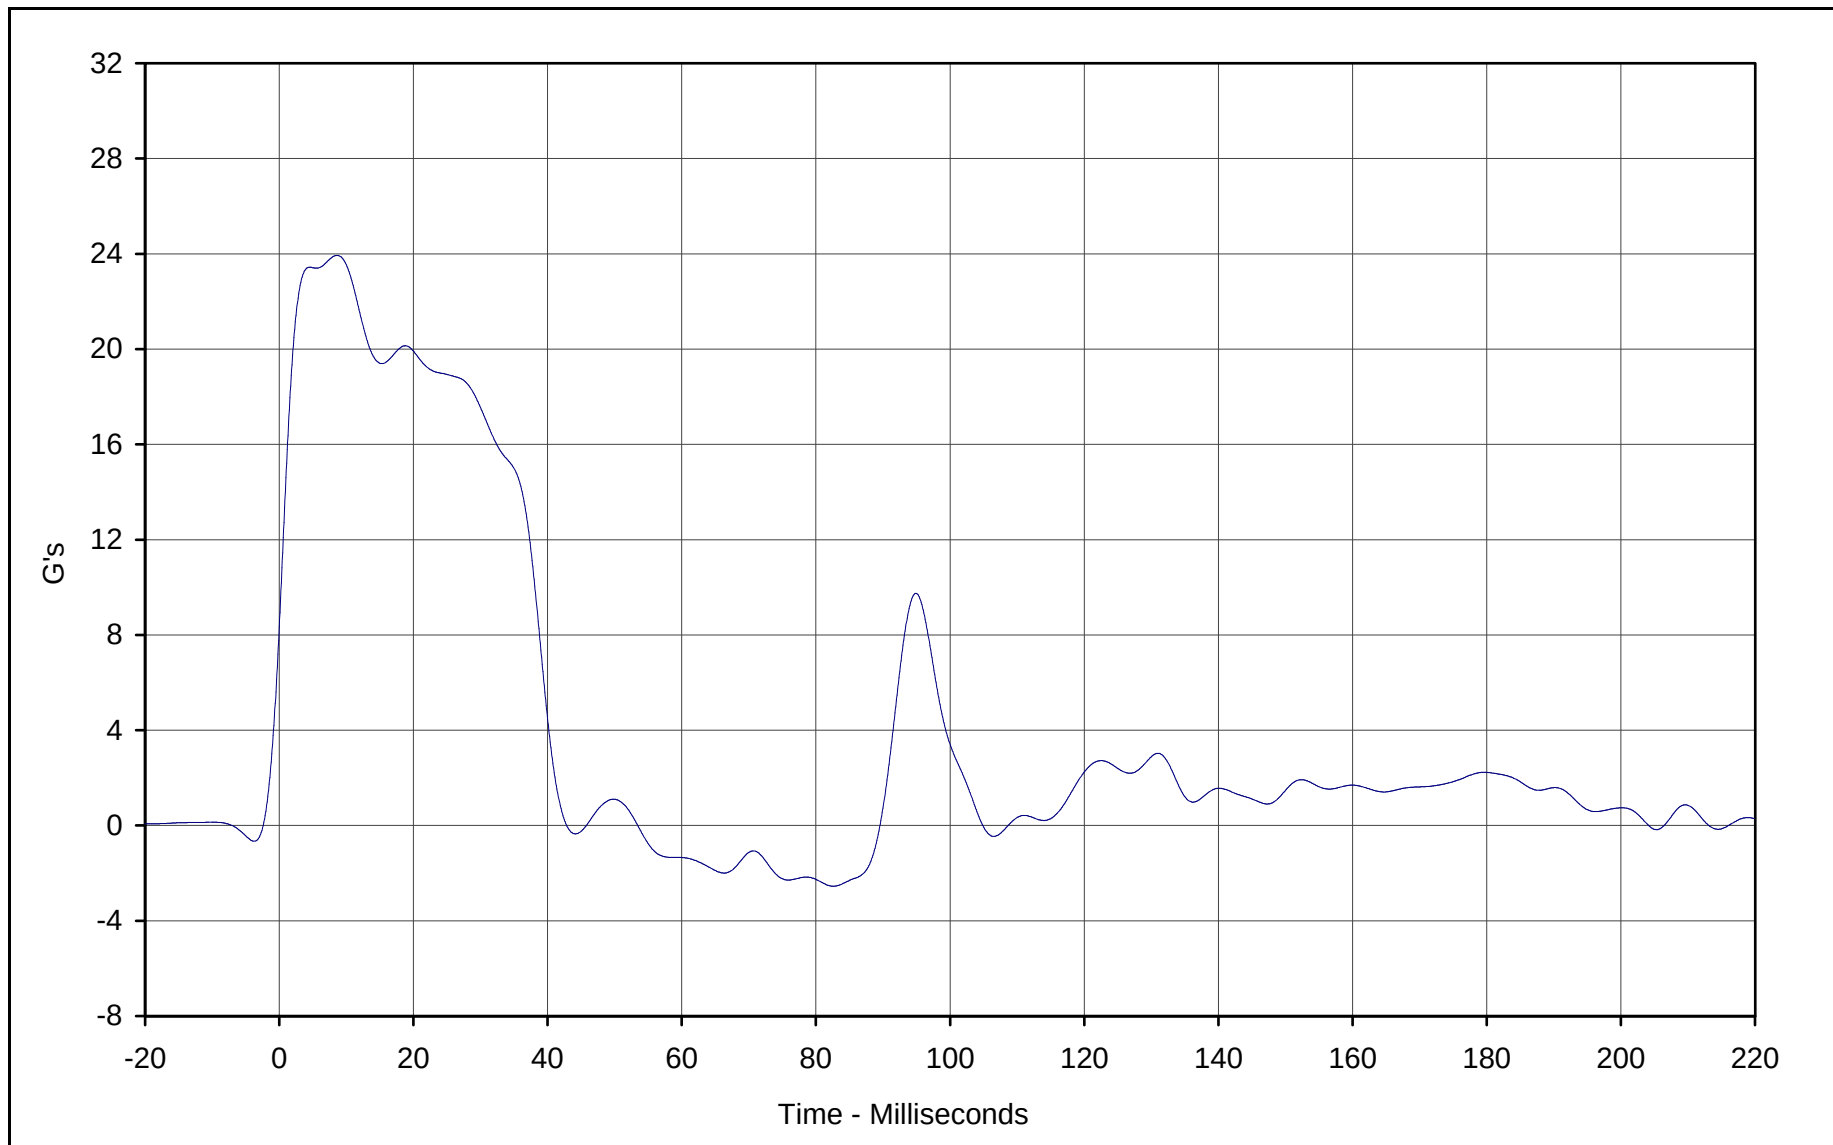


Curve Description: Pendulum Deceleration

Maximum Value:	<u>23.9</u>	at	<u>8.6</u>	Milliseconds
Minimum Value:	<u>-2.6</u>	at	<u>82.6</u>	Milliseconds
SAE Filter Class:	<u>60</u>			
Date of Test:	<u>2/12/01</u>			
ATD Serial No.:	<u>035</u>			

Testing Program: Hybrid III Neck Flexion Test (Male)

Test Information: S/N of Part: N/A Test I.D.: NF02F



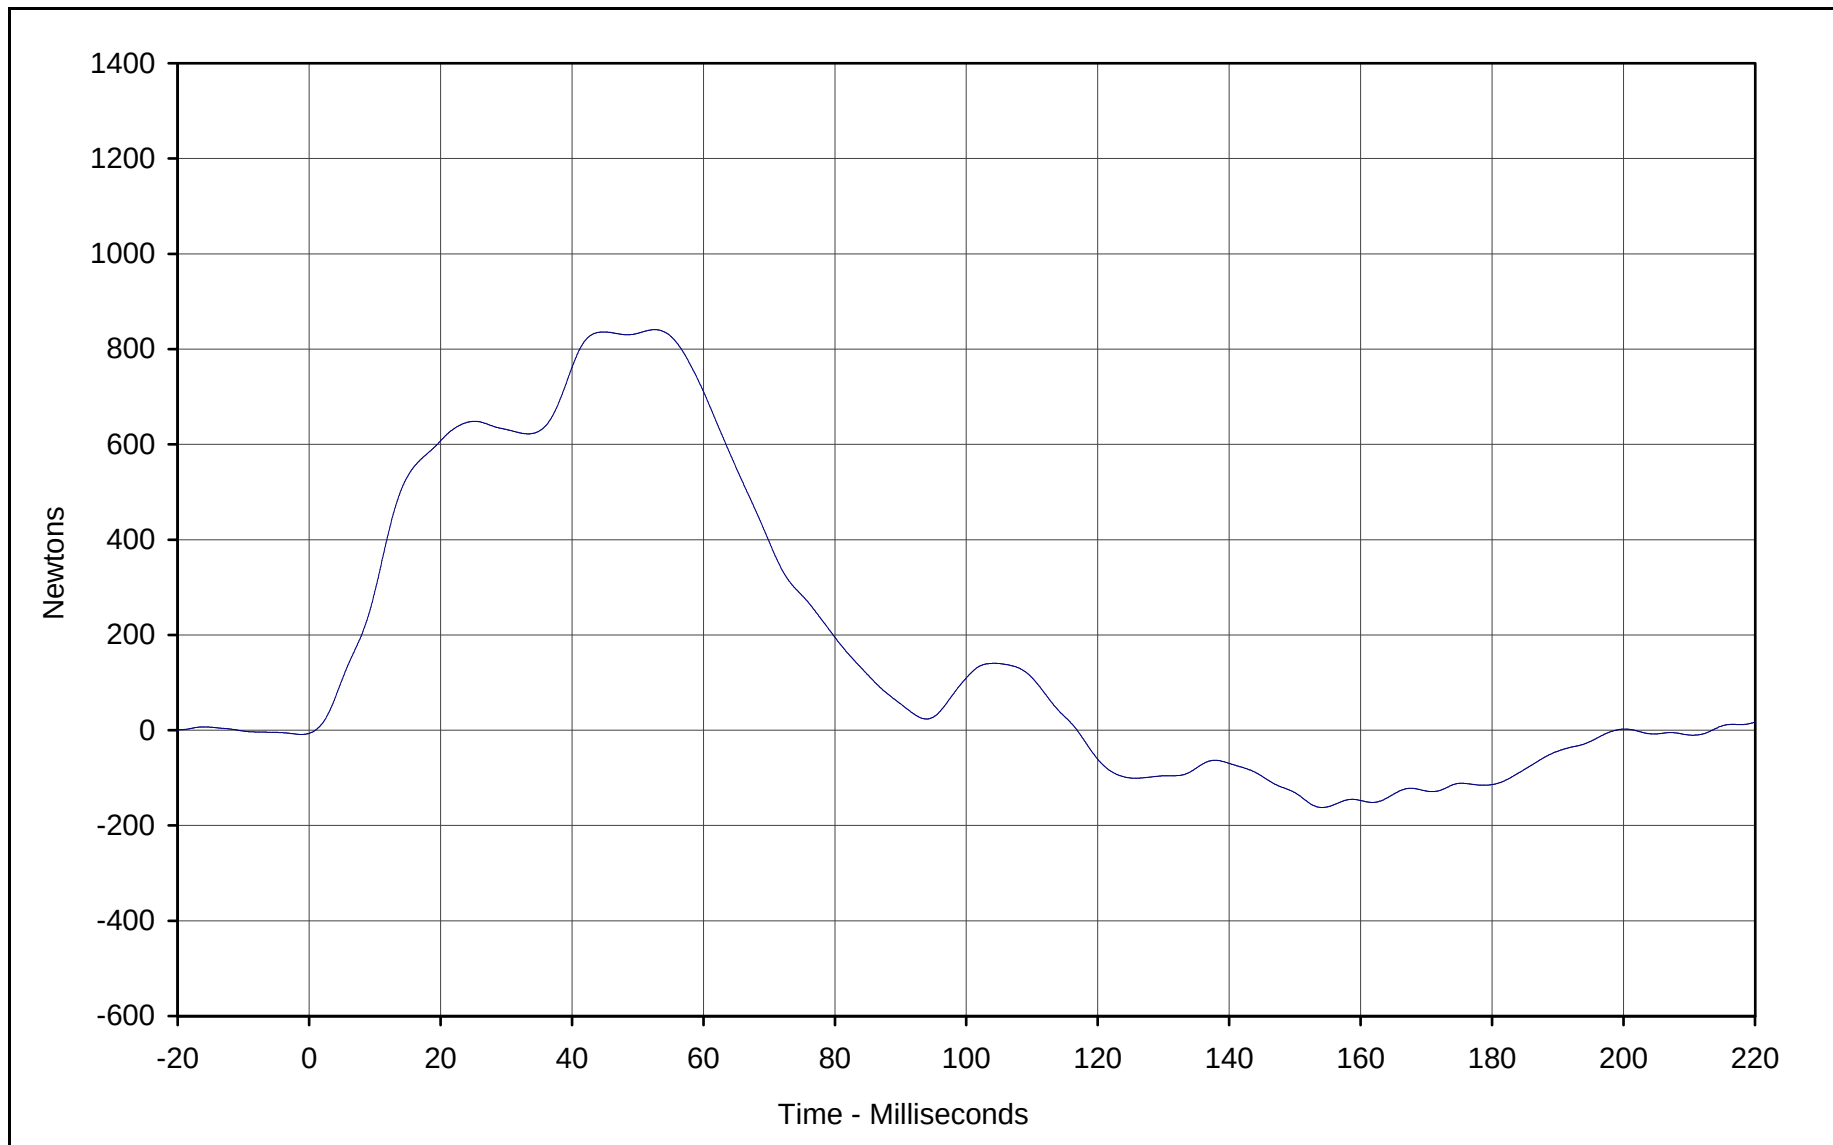


Curve Description: Neck Force X

Maximum Value:	840.8	at	52.6	Milliseconds
Minimum Value:	-162.2	at	154.1	Milliseconds
SAE Filter Class:	60			
Date of Test:	2/12/01			
ATD Serial No.:	035			

Testing Program: Hybrid III Neck Flexion Test (Male)

Test Information: S/N of Part: N/A Test I.D.: NF02F



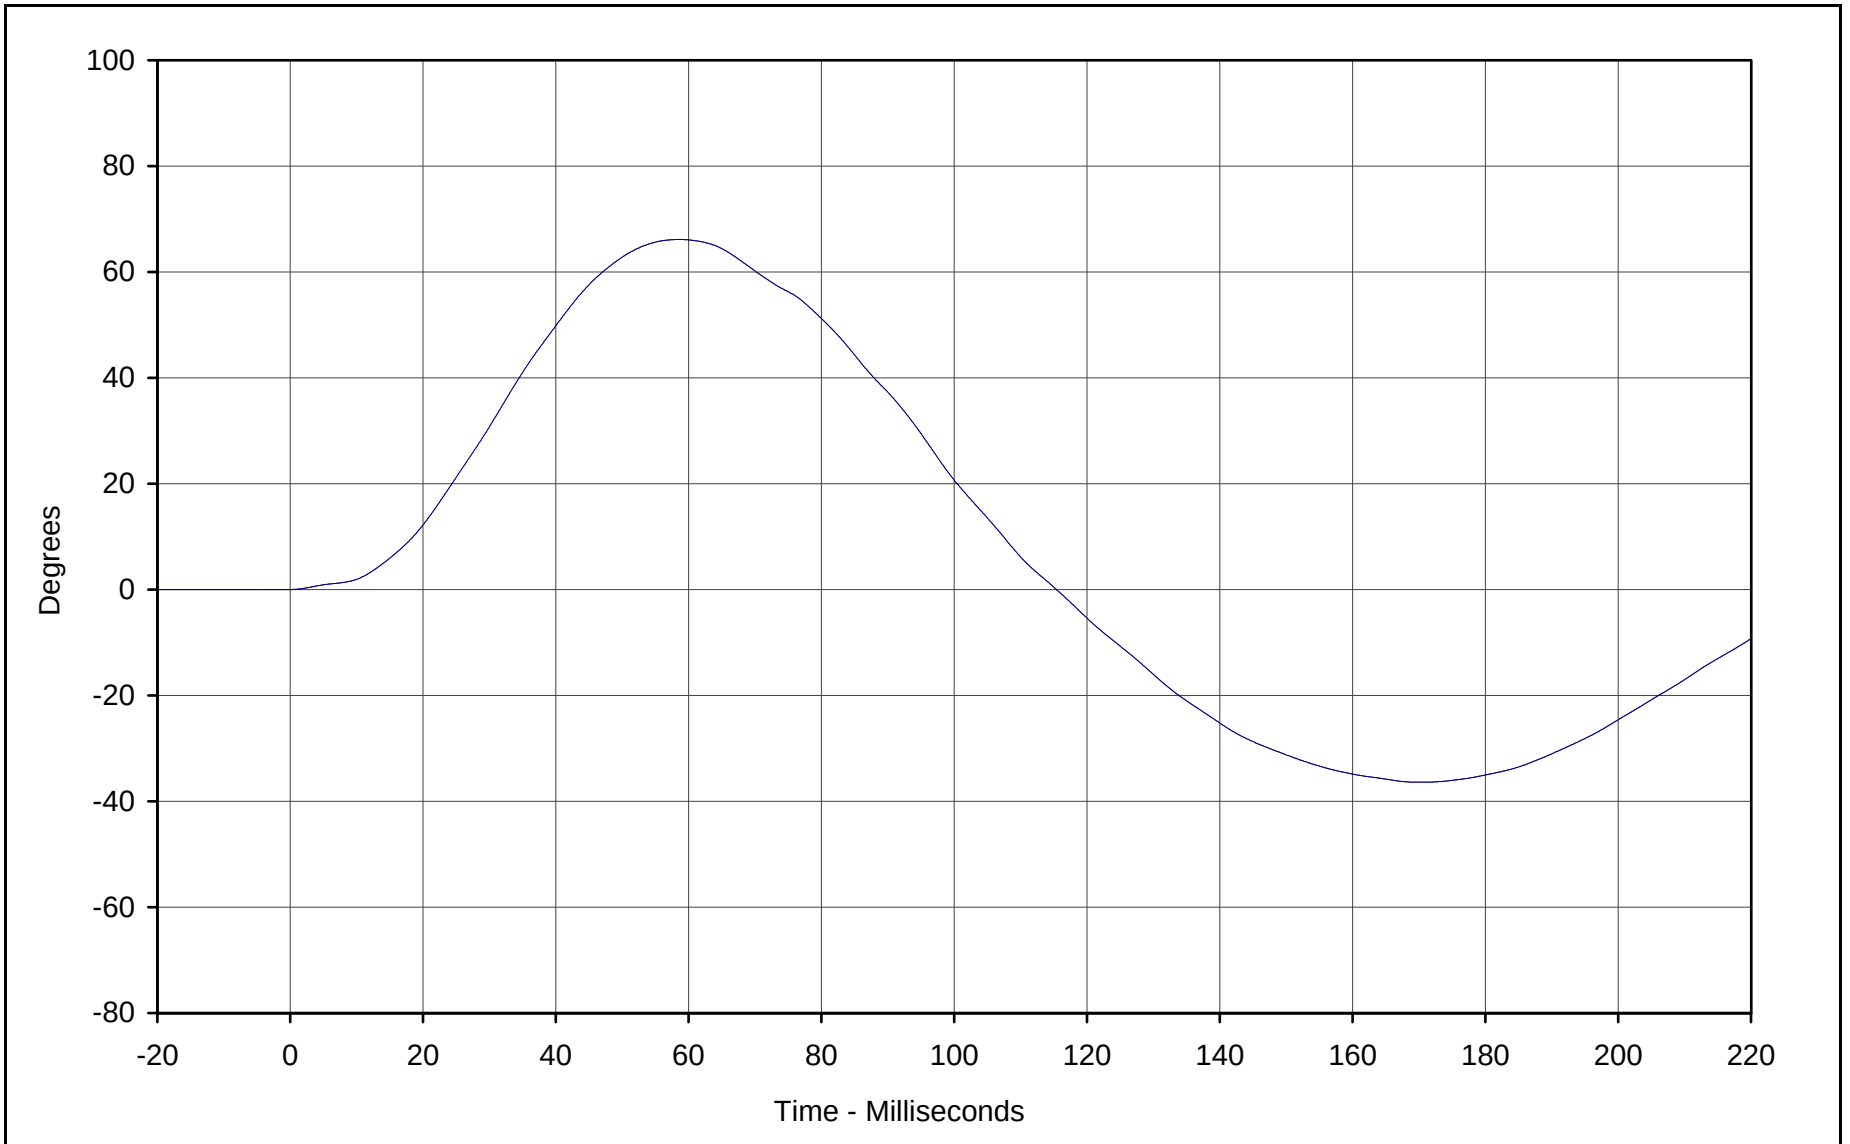


Curve Description: "D" Plane Rotation

Maximum Value:	66.1	at	58.6	Milliseconds
Minimum Value:	-36.4	at	170.1	Milliseconds
SAE Filter Class:	60			
Date of Test:	2/12/01			
ATD Serial No.:	035			

Testing Program: Hybrid III Neck Flexion Test (Male)

Test Information: S/N of Part: N/A Test I.D.: NF02F



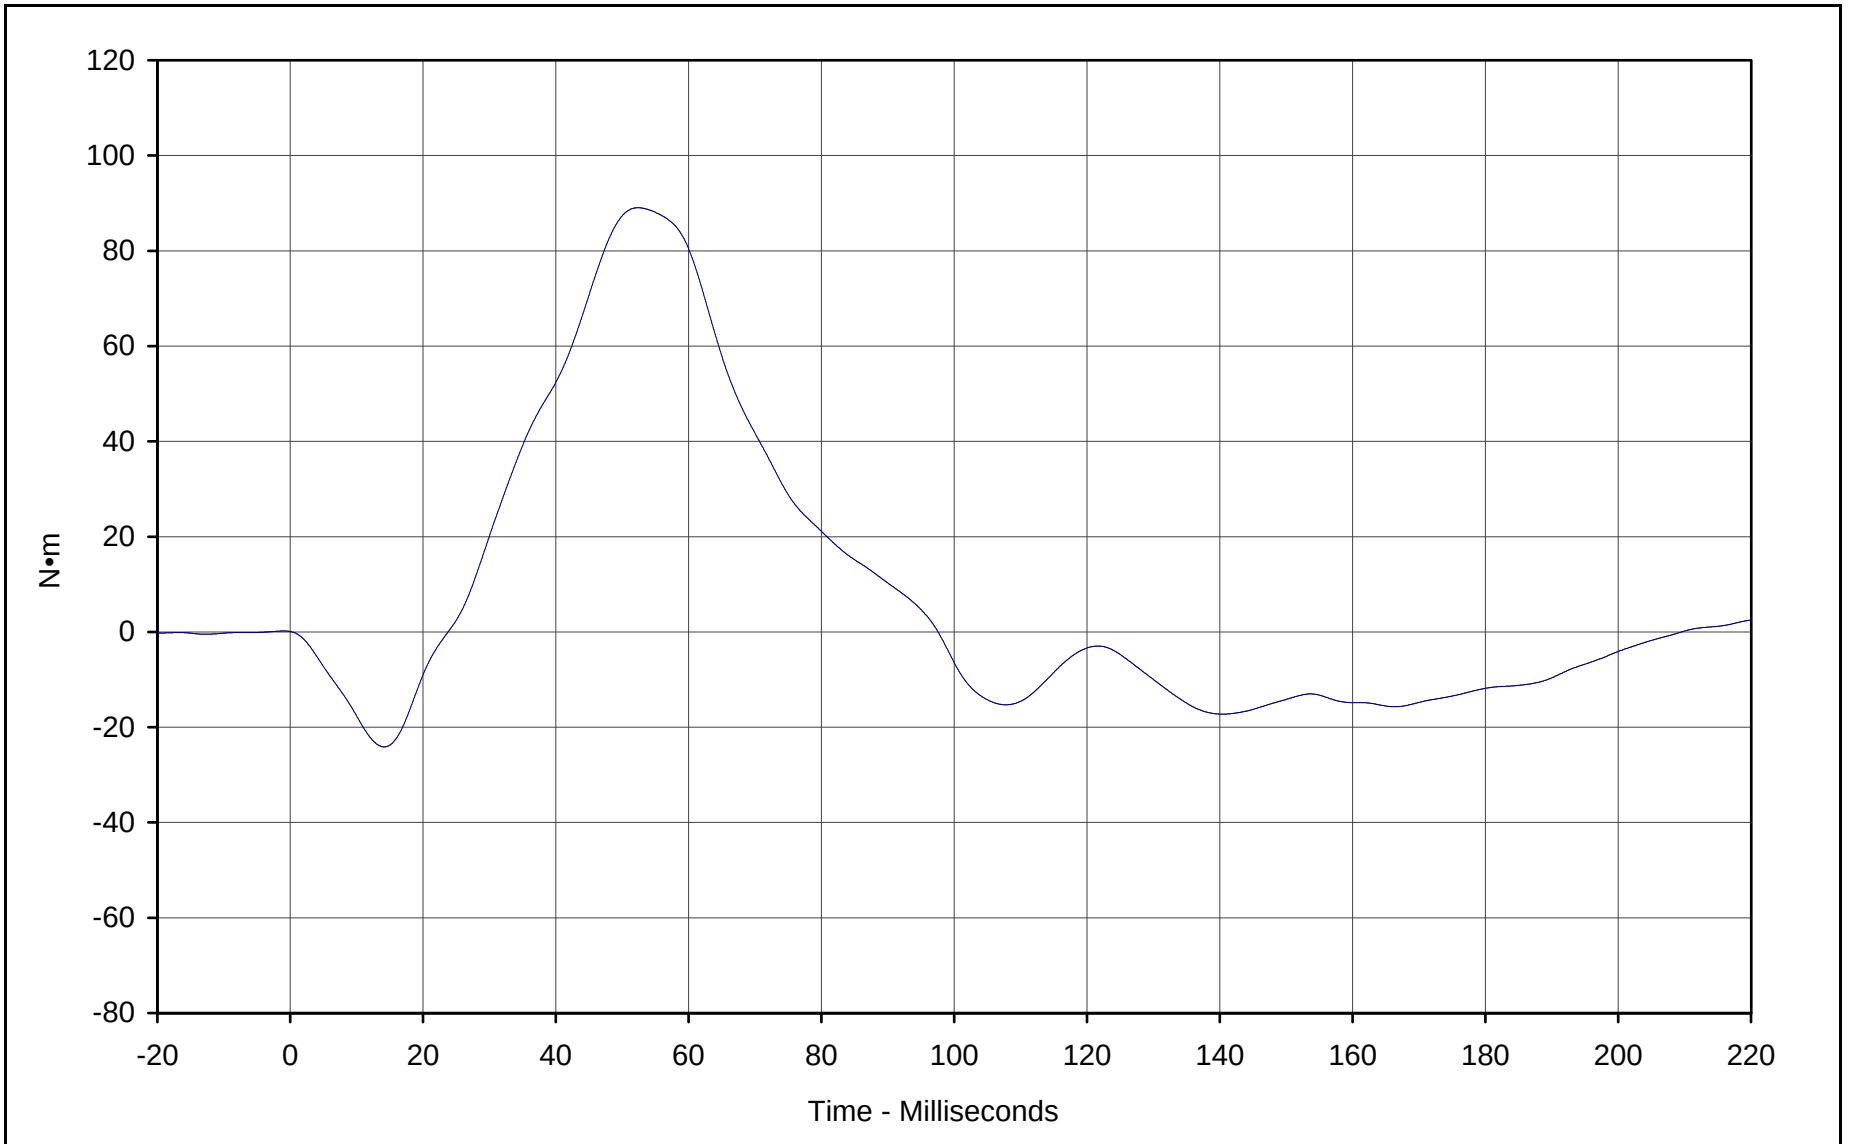

Curve Description: Moment About Occipital Condyles

Maximum Value: 89.1 at 52.4 Milliseconds

Minimum Value: -24.1 at 14.2 Milliseconds

SAE Filter Class: 60

Date of Test: 2/12/01

ATD Serial No.: 035

Testing Program: Hybrid III Neck Flexion Test (Male)

Test Information: S/N of Part: N/A Test I.D.: NF02F





Hybrid III Calibration Data Sheet

50TH Percentile Male

Neck Extension Test

ATD Serial No.: 035

Part Serial No.: N/A

Test I.D.: NE02E-A

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Velocity		m/s	5.95 to 6.19	5.97	Pass
Pendulum Deceleration	10 Msec.	G's	17.2 to 21.2	18.2	Pass
	20 Msec.	G's	14.0 to 19.0	18.1	Pass
	30 Msec.	G's	11.0 to 16.0	15.9	Pass
Peak Pendulum Decel. after 30 Msec.		G's	≤ 22.0	15.9	Pass
Deceleration Decay, Time to Cross 5 G's		Msec.	38.0 to 46.0	39.3	Pass
Maximum "D" Plane Rotation	Maximum	Degrees	81.0 to 106.0	100.6	Pass
	Time	Msec.	72.0 to 82.0	77.9	Pass
"D" Plane Rotation Decay, Time To Zero Crossing		Msec.	147.0 to 174.0	154.5	Pass
Moment About Occipital Condyle	Maximum	N•m	-52.9 to- 79.9	-76.9	Pass
	Time	Msec.	65.0 to 79.0	69.1	Pass
Negative Moment Decay, Time To Zero Crossing		Msec.	120.0 to 148.0	141.0	Pass
Overall Test Results					Pass


Laboratory Technician

February 12, 2001

Test Date

Approved By

Date

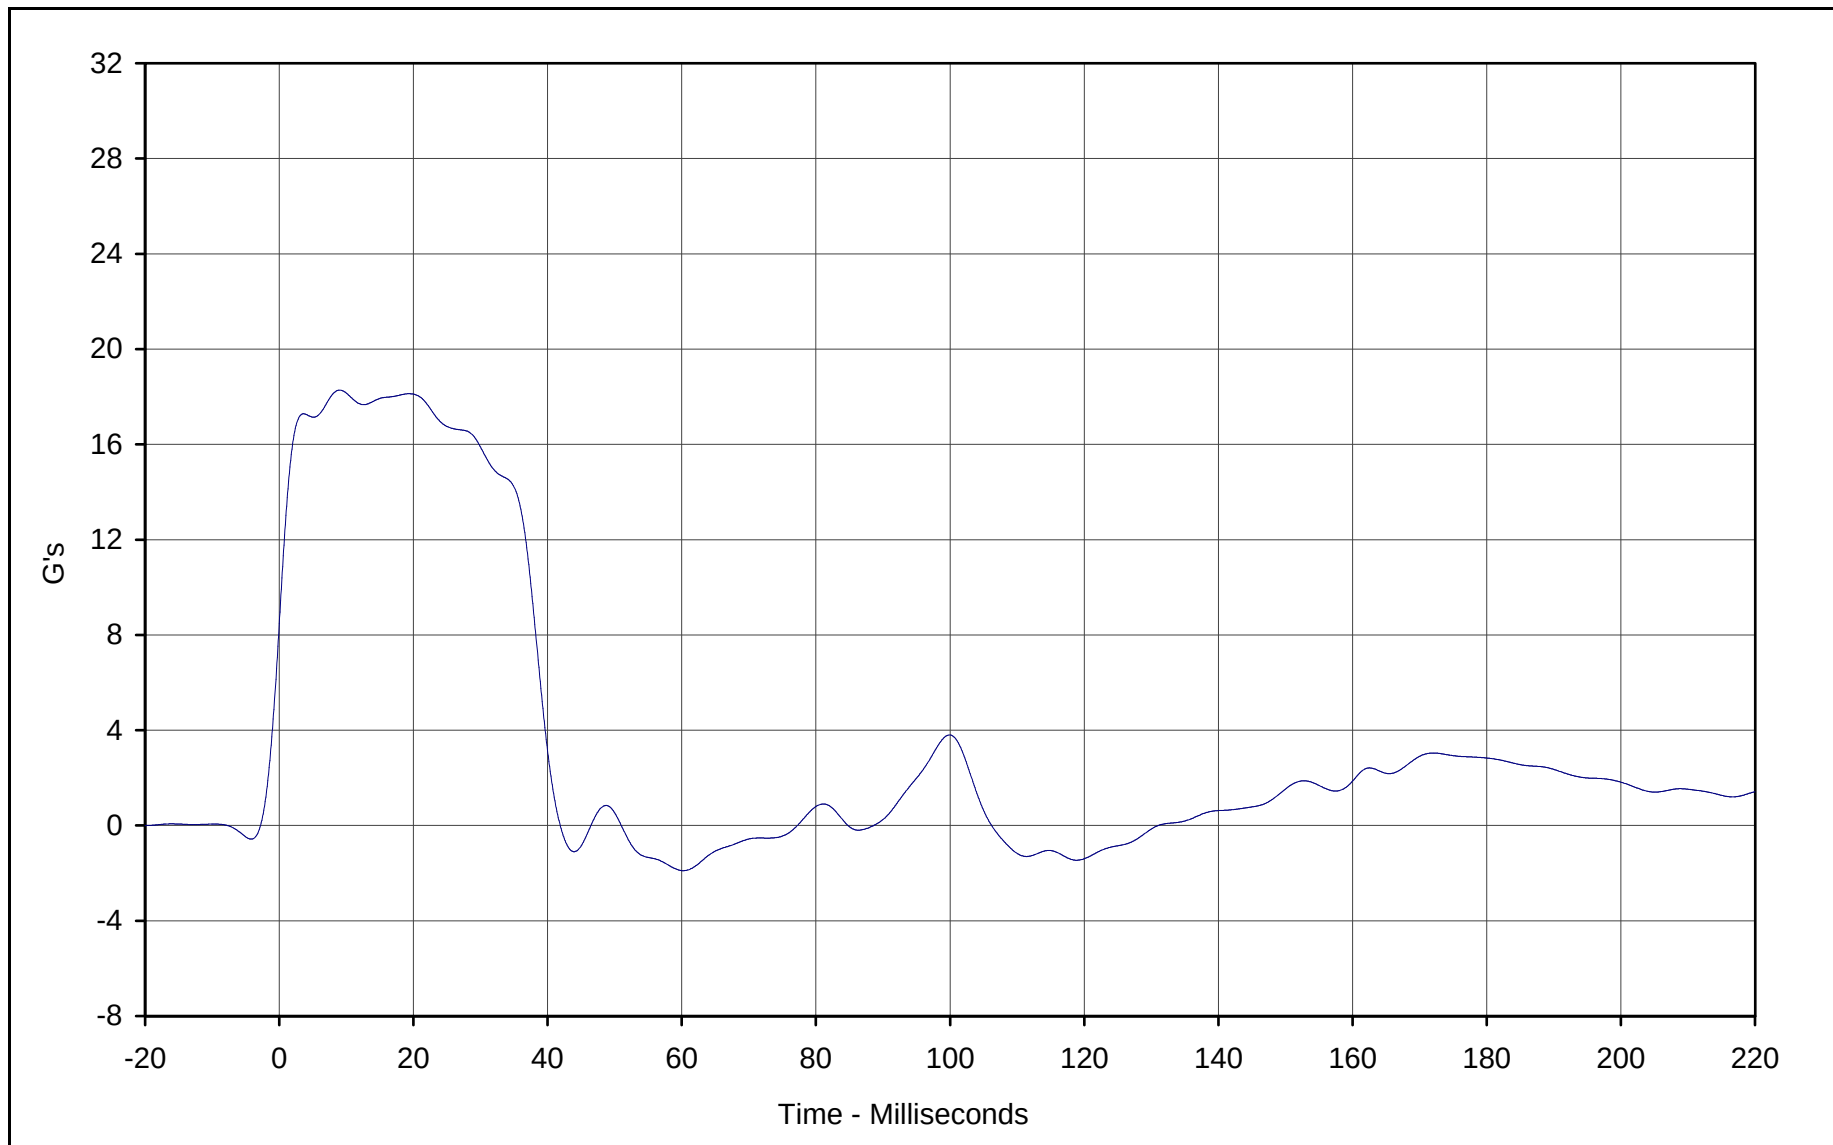


Curve Description:	Pendulum Deceleration		
Maximum Value:	18.3	at	9.0 Milliseconds
Minimum Value:	-1.9	at	60.2 Milliseconds
SAE Filter Class:	60		
Date of Test:	2/12/01		
ATD Serial No.:	035		

Testing Program:	Hybrid III Neck Extension Test (Male)
------------------	---------------------------------------

Test Information:	S/N of Part: N/A Test I.D.: NE02E-A
-------------------	--



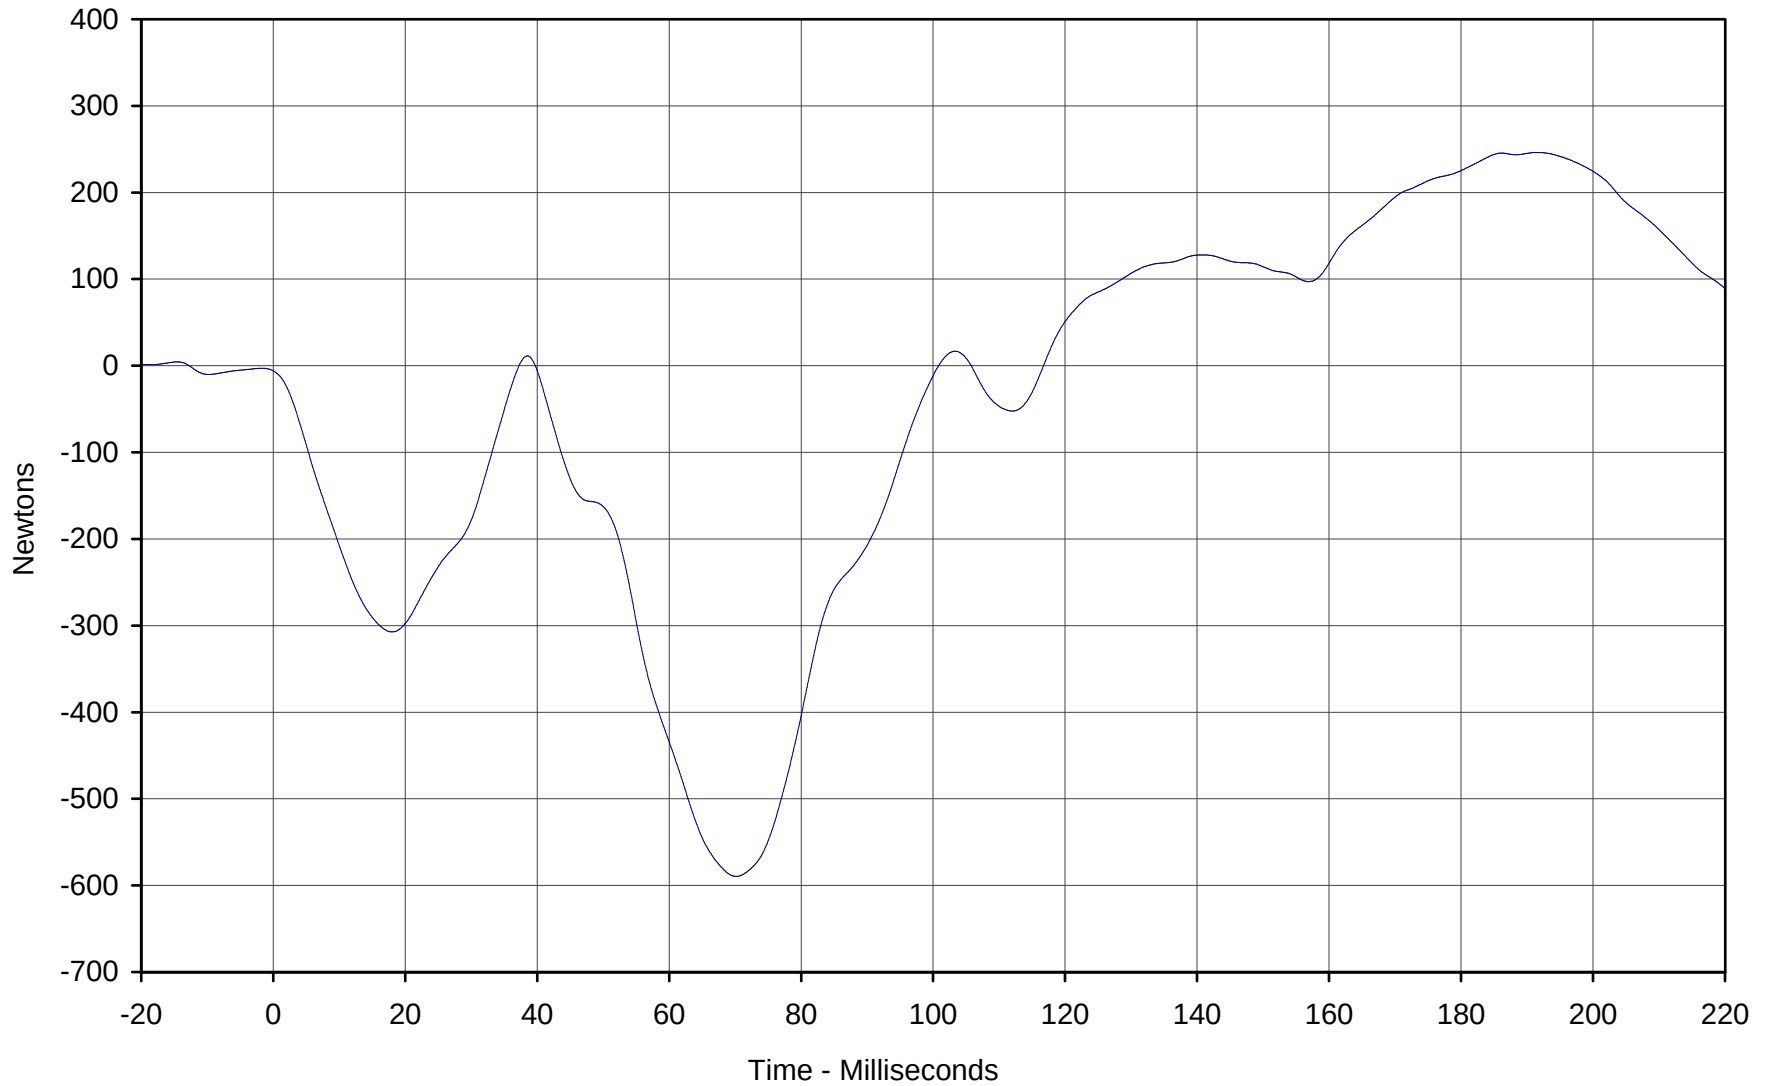


Curve Description: Neck Force X

Maximum Value:	246.2	at	191.6	Milliseconds
Minimum Value:	-589.6	at	70.2	Milliseconds
SAE Filter Class:	60			
Date of Test:	2/12/01			
ATD Serial No.:	035			

Testing Program: Hybrid III Neck Extension Test (Male)

Test Information: S/N of Part: N/A Test I.D.: NE02E-A



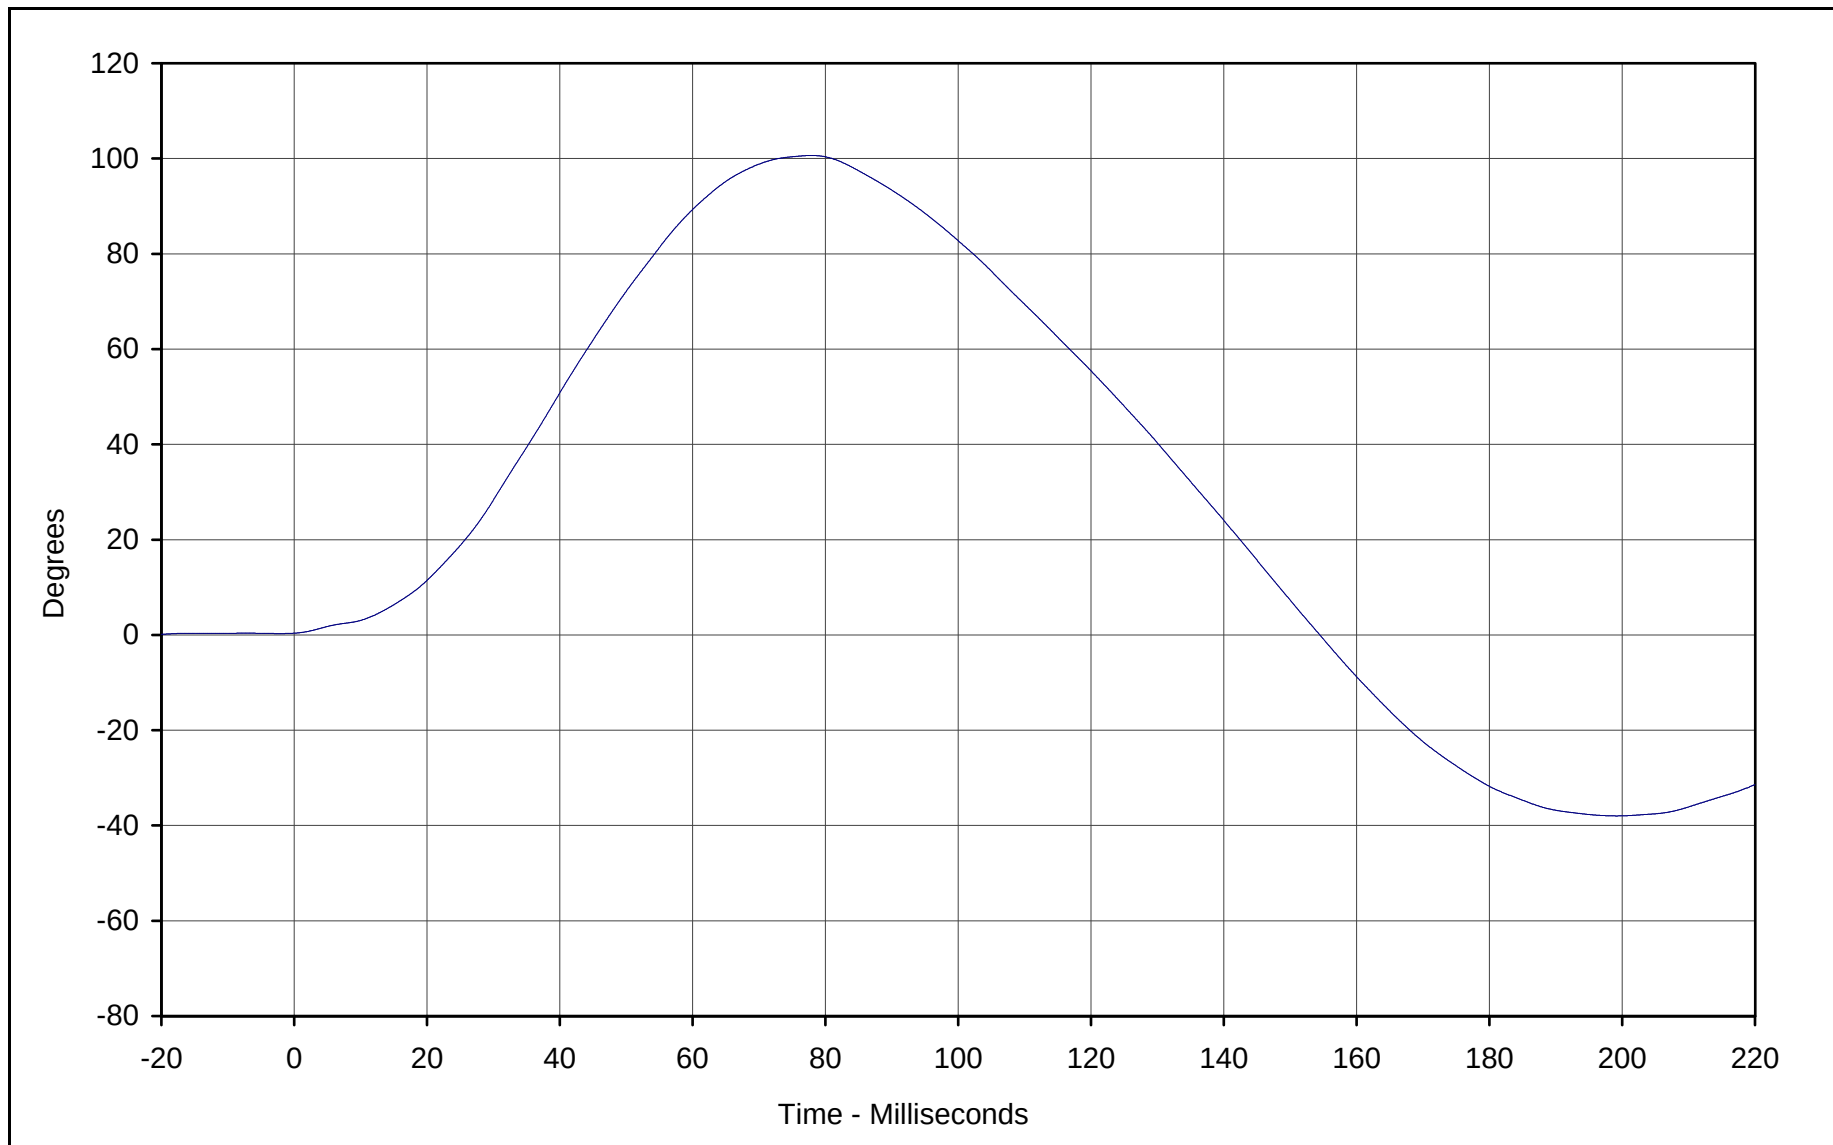


Curve Description: "D" Plane Rotation

Maximum Value:	100.6	at	77.9	Milliseconds
Minimum Value:	-38.0	at	199.1	Milliseconds
SAE Filter Class:	60			
Date of Test:	2/12/01			
ATD Serial No.:	035			

Testing Program: Hybrid III Neck Extension Test (Male)

Test Information: S/N of Part: N/A Test I.D.: NE02E-A



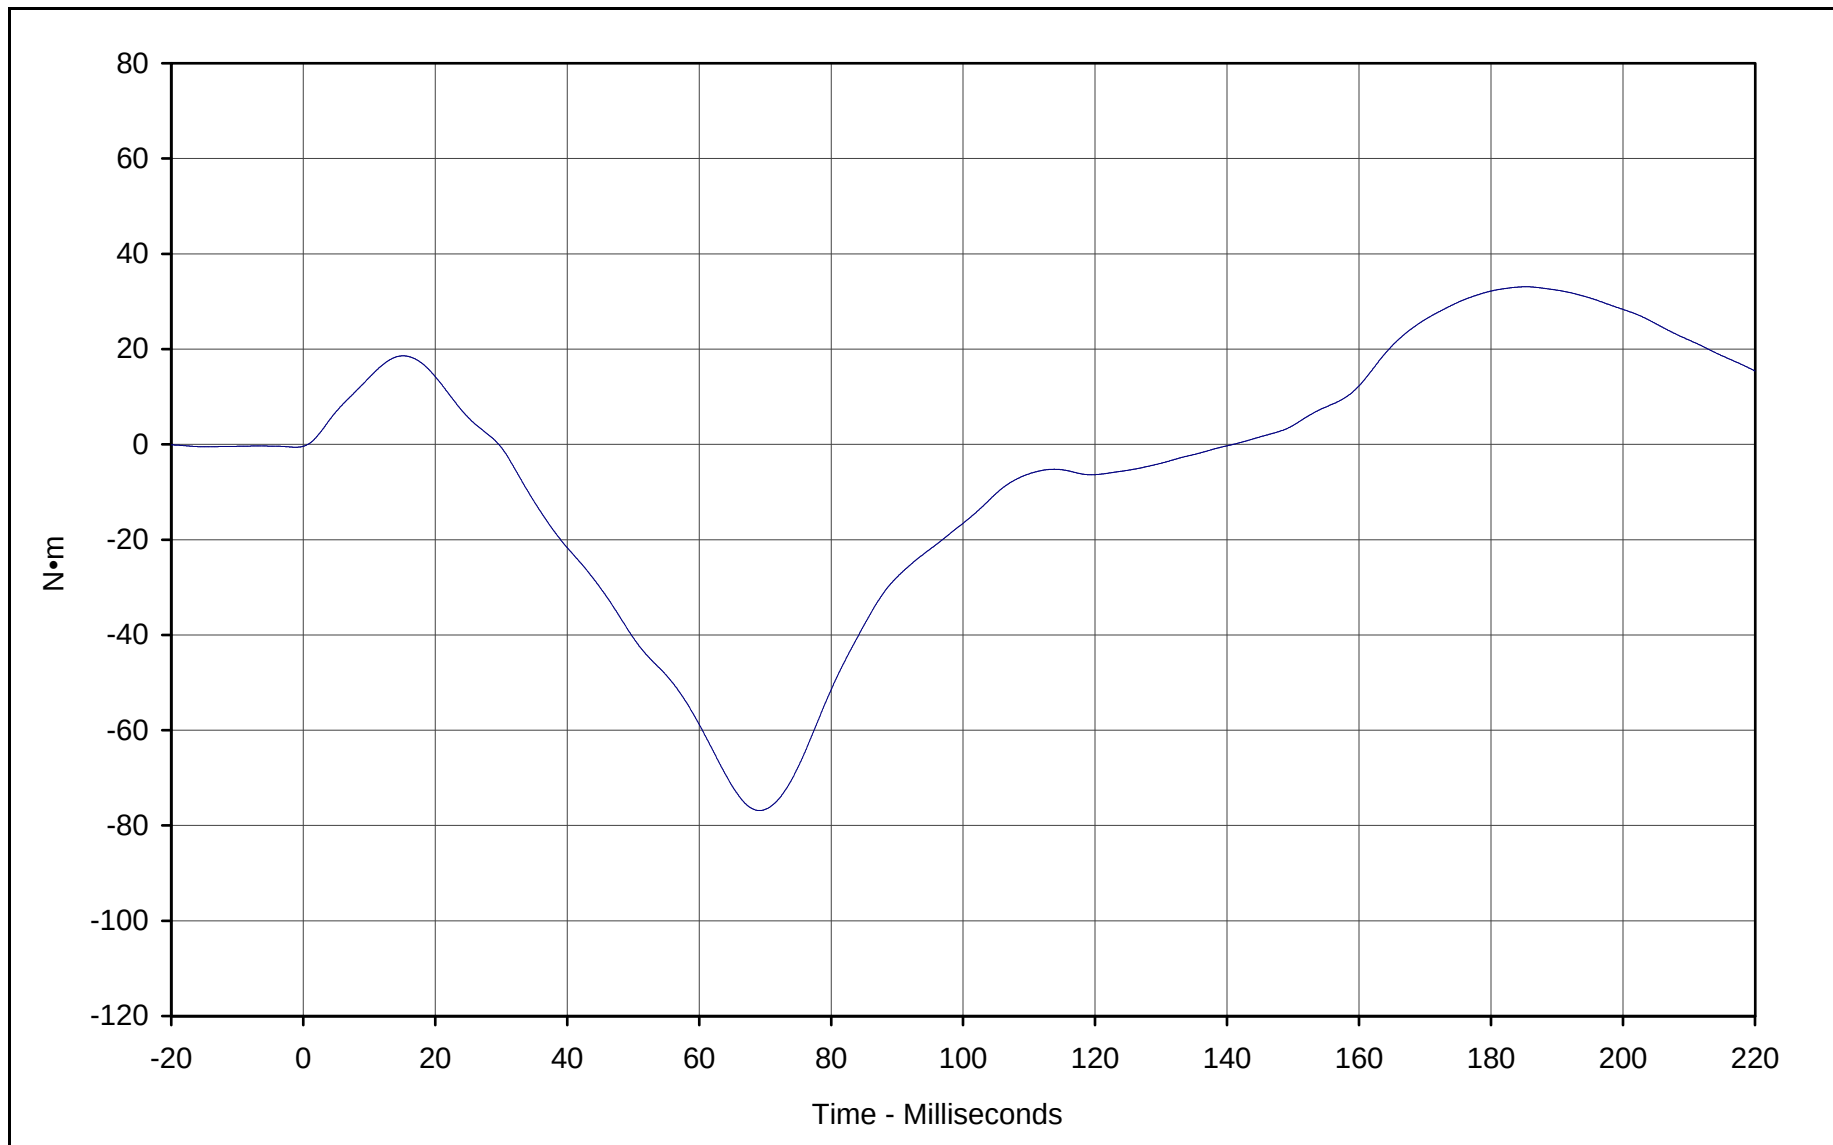

Curve Description: Moment About Occipital Condyles

Maximum Value: 33.1 at 185.3 Milliseconds

Minimum Value: -76.9 at 69.1 Milliseconds

SAE Filter Class: 60

Date of Test: 2/12/01

ATD Serial No.: 035

Testing Program: Hybrid III Neck Extension Test (Male)

Test Information: S/N of Part: N/A Test I.D.: NE02E-A





Hybrid III Calibration Data Sheet

50TH Percentile Male

External Measurements

ATD Serial No.: 035

Part Serial No.: N/A

Test I.D.: N/A

External Measurement Data				
Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory temperature	°C	20.4 to 22.1	20.9	Pass
Laboratory relative humidity	%	10 to 70	43	Pass
A - Total sitting height	mm	879 to 889	880	Pass
B - Shoulder pivot height	mm	505 to 521	510	Pass
C - "H" point height	mm	84 to 89	85	Pass
D - "H" point from seat back	mm	135 to 140	135	Pass
E - Shoulder pivot from back	mm	84 to 94	90	Pass
F - Thigh clearance	mm	140 to 155	150	Pass
G - Elbow back to wrist pivot	mm	290 to 305	300	Pass
H - Skull cap to back line	mm	41 to 46	45	Pass
I - Shoulder to elbow length	mm	330 to 345	335	Pass
J - Elbow rest height	mm	190 to 211	205	Pass
K - Buttock to knee length	mm	579 to 604	585	Pass
L - Popliteal length	mm	429 to 455	435	Pass
M - Knee pivot height	mm	485 to 500	490	Pass
N - Buttock popliteal length	mm	452 to 477	470	Pass
O - Chest depth	mm	213 to 229	215	Pass
P - Foot length	mm	251 to 267	260	Pass
V - Shoulder breadth	mm	422 to 437	425	Pass
W - Foot breadth	mm	91 to 107	105	Pass
Y - Chest circumference	mm	970 to 1001	975	Pass
Z - Waist circumference	mm	836 to 866	850	Pass
AA - Location for chest circumference	mm	429 to 434	430	Pass
BB - Location for waist circumference	mm	226 to 231	230	Pass
Overall Test Results				Pass

Laboratory Technician

February 12, 2001

Test Date

Approved By

Date

APPENDIX F
VEHICLE OWNER'S MANUAL
OCCUPANT RESTRAINT INSTRUCTIONS

There is also a battery saver feature that will turn the interior lights off after 15 minutes if a door is left open or the dimmer control is in the interior lights on position.

OCCUPANT RESTRAINTS

Some of the most important safety features in your vehicle are the restraint systems. These include the front and rear seat belts for the driver and all passengers, and front airbags for both the driver and front passenger. If you will be carrying children too small for adult-size belts, your seat belts also can be used to hold infant and child restraint systems.


Please pay close attention to the information in this section. It tells you how to use your restraint system properly to keep you and your passengers as safe as possible.

WARNING!


In a collision, you and your passengers can suffer much greater injuries if you are not properly buckled up. You can strike the interior of your vehicle or other passengers, or you can be thrown out of the vehicle. Always be sure you and others in your vehicle are buckled up properly.

Buckle up even though you are an excellent driver, even on short trips. Someone on the road may be a poor driver and cause a collision that includes you. This can happen far away from home or on your own street.

Research has shown that seat belts save lives, and that they can reduce the seriousness of injuries in a collision. Some of the worst injuries happen when people are thrown from the vehicle. Seat belts reduce the possibility of ejection and the risk of injury caused by striking the inside of the vehicle. **Everyone** in a motor vehicle should be belted at all times.

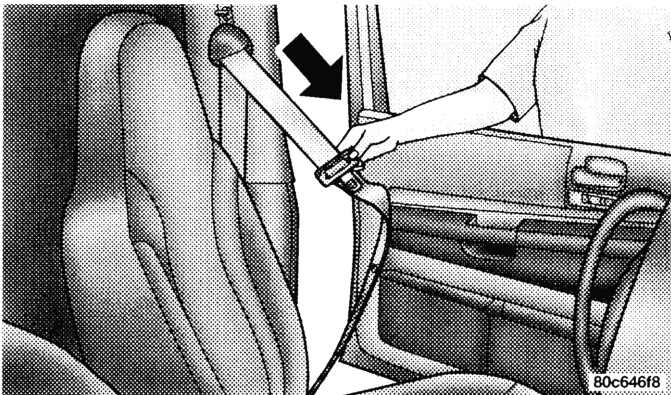

2. The seat belt latch plate is above the back of the front seat, next to your arm in the rear seat. Grasp the latch plate and pull out the belt. Slide the latch plate up the webbing as far as necessary to allow the belt to go around your lap.

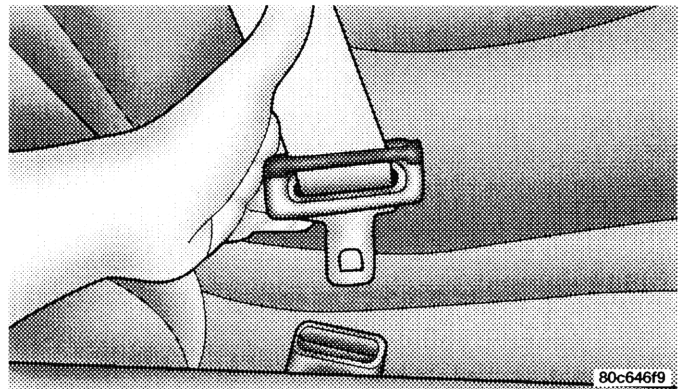

3. When the belt is long enough to fit, insert the latch plate into the buckle until you hear a "click."

Lap/Shoulder Belts

The outboard front and rear seats of your vehicle have combination lap / shoulder belts. The belt webbing retractor is designed to lock during very sudden stops or collisions. This feature allows the shoulder part of the belt to move freely with you under normal conditions. But in a collision, the belt will lock and reduce the risk of your striking the inside of the vehicle or being thrown out.

W A R N I N G !

It is extremely dangerous to ride in a cargo area, inside or outside of a vehicle. In a collision, people riding in these areas are more likely to be seriously injured or killed.

Do not allow people to ride in any area of your vehicle that is not equipped with seats and seat belts.

Be sure everyone in your vehicle is in a seat and using a seat belt properly.

WARNING!

- Wearing a seat belt incorrectly is dangerous. Seat belts are designed to go around the large bones of your body. These are the strongest parts of your body and can take the forces of a collision the best. Wearing your belt in the wrong place could make your injuries in a collision much worse. You might suffer internal injuries, or you could even slide out of part of the belt. Follow these instructions to wear your seat belt safely and to keep your passengers safe, too.
- Two people should never be belted into a single seat belt. People belted together can crash into one another in an accident, hurting one another badly. Never use a lap/shoulder belt or a lap belt for more than one person, no matter what their size.


Lap/Shoulder Belt Operating Instructions

1. Enter the vehicle and close the door. Sit back and adjust the seat.

WARNING!

- A belt buckled into the wrong buckle will not protect you properly. The lap portion could ride too high on your body, possibly causing internal injuries. Always buckle your belt into the buckle nearest you.
- A belt that is too loose will not protect you as well. In a sudden stop you could move too far forward, increasing the possibility of injury. Wear your seat belt snugly.
- A belt that is worn under your arm is very dangerous. Your body could strike the inside surfaces of the vehicle in a collision, increasing head and neck injury. And a belt worn under the arm can cause internal injuries. Ribs aren't as strong as shoulder bones. Wear the belt over your shoulder so that your strongest bones will take the force in a collision.
- A shoulder belt placed behind will not protect you from injury during a collision. You are more likely to hit your head in a collision if you do not wear your shoulder belt. The lap and shoulder belt are meant to be used together.

4. Position the lap belt across your thighs, below your abdomen. To remove slack in the lap belt portion, pull up on the shoulder belt. To loosen the lap belt if it is too tight, tilt the latch plate and pull on the lap belt. A snug belt reduces the risk of sliding under the belt in a collision.

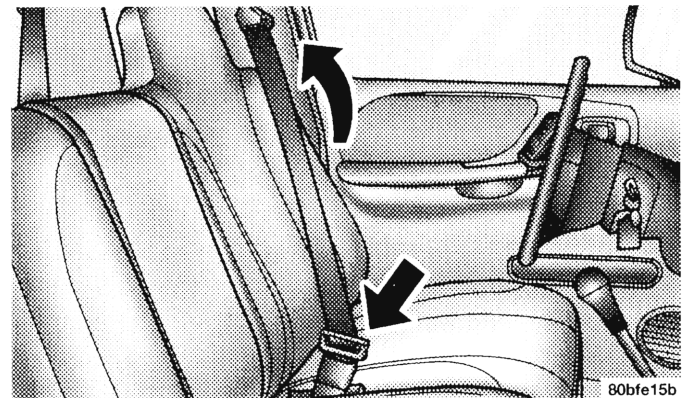

WARNING!

- A lap belt worn too high can increase the risk of internal injury in a collision. The belt forces won't be at the strong hip and pelvic bones, but across your abdomen. Always wear the lap belt as low as possible and keep it snug.
- A twisted belt can't do its job as well. In a collision it could even cut into you. Be sure the belt is straight. If you can't straighten a belt in your vehicle, take it to your dealer and have it fixed.

5. Position the shoulder belt on your chest so that it is comfortable and not resting on your neck. The retractor will withdraw any slack in the belt.

6. To release the belt, push the red button on the buckle. The belt will automatically retract to its stowed position. If necessary, slide the latch plate down the webbing to allow the belt to retract fully

2

WARNING!

A frayed or torn belt could rip apart in a collision and leave you with no protection. Inspect the belt system periodically, checking for cuts, frays, or loose parts. Damaged parts must be replaced immediately. Do not disassemble or modify the system. Seat belt assemblies must be replaced after a collision if they have been damaged (bent retractor, torn webbing, etc.).

hear a "click." To lengthen the lap belt, tilt the latch plate and pull. To remove slack, pull the loose end of the webbing. Wear the lap belt snug against the hips. Sit back and erect in the seat, then adjust the belt as tightly as is comfortable.

WARNING!

- A lap belt worn too loose or too high is dangerous.
- A belt worn too loose can allow you to slip down and under the belt in a collision.
- A belt that is too loose or too high will apply crash forces to the abdomen, not to the stronger hip bones. In either case, the risk of internal injuries is greater. Wear a lap belt low and snug.

Seat Belts and Pregnant Women

We recommend that pregnant women use seat belts throughout their pregnancies. Keeping the mother safe is the best way to keep the baby safe.

Pregnant women should wear the lap part of the belt across the thighs and as snug against the hips as possible.

Keep the belt low so that it does not come across the abdomen. That way the strong bones of the hips will take the force if there is a collision.

Seat Belt Extender

If a seat belt is too short, even when fully extended, your dealer can provide you with a seat belt extender. This extender should be used only if the existing belt is not long enough. When it is not required, remove the extender and store it.


2

WARNING!

Using a seat belt extender when not needed can increase the risk of injury in a collision. Only use the seat belt extender when the lap belt is not long enough when it is worn low and snug, and in the recommended seating positions. Remove and store the extender when not needed.

Adjustable Upper Shoulder Belt Anchorage

In the front and second row outboard seats, the shoulder belt can be adjusted upward or downward to help position the belt away from your neck. Lift the button located above the upper belt guide to release the anchorage, and then move it up or down to the position that serves you best.

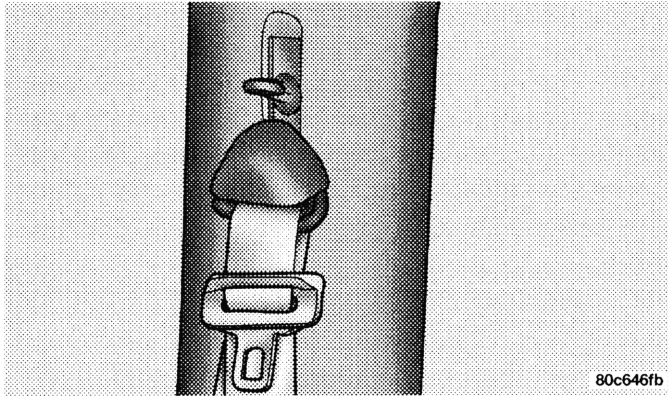

As a guide, if you are shorter than average, you will prefer a lower position, and if you are taller than average,

you'll prefer a higher position. When you release the anchorage, try to move it up or down to make sure that it is locked in position.

Seat Belt Pretensioners-Quad Cab Only

The seat belts for both front seating positions are equipped with pretensioning devices that are designed to remove any slack from the seat belt systems in the event of a collision. These devices improve the performance of the seat belt by assuring that the belt is tight about the occupant early in a collision. Pretensioners work for all size occupants, including those in child restraints.

NOTE: These devices are not a substitute for proper seat belt placement by the occupant. The seat belt still must be worn snugly and positioned properly.

The pretensioners are triggered by the airbag control module. Like the airbags, the pretensioners are single use items. After a collision that is severe enough to deploy the airbags and pretensioners, both must be replaced.

Front Center Lap Belts


The center seating positions have a lap belt only. To fasten the lap belt, slide the latch plate into the buckle until you

28 THINGS TO KNOW BEFORE STARTING YOUR VEHICLE

Driver And Right Front Passenger Supplemental Restraint System-Airbag

This vehicle has front airbags for both the driver and front passenger as a supplement to the seat belt restraint systems. The driver's front airbag is mounted in the center of the steering wheel. The passenger's front airbag is mounted in the instrument panel, above the glove compartment. The words SRS AIRBAG are embossed on the airbag covers.

These airbags are certified to the new Federal regulations that allow less forceful deployments.

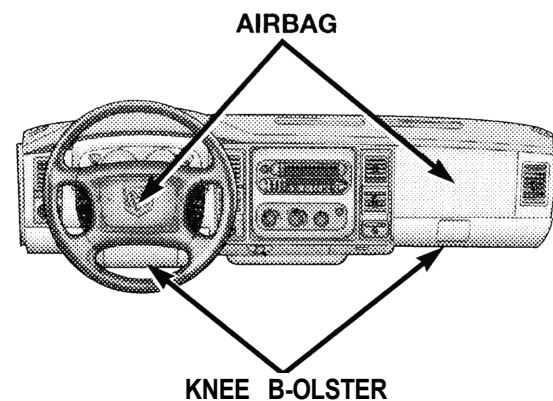

80c647df

WARNING!

Do not put anything on or around the front airbag covers or attempt to manually open them. You may damage the airbags and you could be injured because the airbags are not there to protect you. These protective covers for the airbag cushions are designed to open only when the airbags are inflating.

Airbags inflate in moderate to high speed impacts. Along with the seatbelts, front airbags work with the instrument panel knee bolsters to provide improved protection for the driver and front passenger.

The seat belts are designed to protect you in many types of collisions. The front airbags deploy in moderate to severe frontal collisions. But even in collisions where the airbags work, you need the seat belts to keep you in the right position for the airbags to protect you properly.

Here are some simple steps you can follow to minimize the risk of harm from a deploying airbag.

- Children 12 years and under should ride buckled up in a rear seat, if available.
- Infants in rear facing child restraints (designed for children 9 kg (20 lbs.) and less than one year old must **NEVER** ride in the front seat of a vehicle with a passenger front airbag **unless the airbag is turned off**. An airbag deployment could cause severe injury or death to infants in that position. See the passenger airbag on / off switch section.
- If your vehicle does not have a rear seat, see the Passenger Airbag On/ Off Switch section.
- Children more than 18 kg (40 lbs) should be secured in the rear seat in child restraints or belt-positioning booster seats. Older children who do not use child restraints or belt-positioning booster seats should ride properly buckled up in the rear seat, and in the outboard seat if possible. Never allow children to slide the shoulder belt behind them or under their arm.
- All occupants should use their seat belts properly.

2

ignition switch is in the START or RUN positions. These include all of the items listed above except the knee bolsters, the instrument panel, and the steering wheel and column. If the key is in the "off" position, in the ACC position, or not in the ignition, the airbags are not on and will not inflate.

- The airbag control module also turns on the AIRBAG light in the instrument panel for 6 to 8 seconds when the ignition is first turned on, then turns the light off. If it detects a malfunction in any part of the system, it turns on the light either momentarily or continuously.

WARNING !

Ignoring the AIRBAG light in your instrument panel could mean you won't have the airbags to protect you in a collision. If the light does not come on, stays on after you start the vehicle, or if it comes on as you drive, have the airbag system checked right away.

- When the airbag control module detects a collision requiring the airbags, it signals the inflator units. A

large quantity of nontoxic gas is generated to inflate the airbags. The airbag covers separate and fold out of the way as the airbags inflate to their full size. The airbags fully inflate in milliseconds. This is only about half of the time it takes you to blink your eyes. The airbags then quickly deflate while helping to restrain the driver and front passenger. The driver's front airbag gas is vented through the airbag material towards the instrument panel. The passenger's front airbag gas is vented through vent holes in the sides of the airbag. In this way the airbags do not interfere with your control of the vehicle.

- The knee impact bolsters help protect the knees and position you for the best interaction with the front airbag.

Passenger Airbag On/Off Switch - If Equipped

The passenger front airbag is to be turned off only if the passenger:

- is an infant (less than 1 year old) who must ride in the front seat because there is no rear seat, because the rear seat is too small for a rear-facing infant restraint or

2

30 THINGS TO KNOW BEFORE STARTING YOUR VEHICLE

- The driver and front passenger seats should be moved back as far as practical to allow the airbag room to inflate.

WARNING!

- **Relying on the airbags alone could lead to more severe injuries in a collision. The airbags work with your seat belt to restrain you properly. In some collisions the airbags won't deploy at all. Always wear your seat belts even though you have airbags.**
- **Being too close to the steering wheel or instrument panel during airbag deployment could cause serious injury. Airbags need room to inflate. Sit back, comfortably extending your arms to reach the steering wheel or instrument panel.**

Airbag System Components

The airbag system consists of the following:

- Airbag Control Module
- AIRBAG Readiness Light
- Driver Airbag
- Passenger Airbag
- Steering Wheel and Column
- Instrument Panel
- Crash Sensor
- Interconnecting Wiring
- Knee Impact Bolsters
- Passenger Side Frontal Airbag ON/OFF Switch

How The Airbag System Works

- The airbag control module determines if a frontal collision is severe enough to require the airbags to inflate.
- The airbag control module will not detect side, roll over, or rear collisions.
- The airbag control module also monitors the readiness of the electronic parts of the system whenever the


32 THINGS TO KNOW BEFORE STARTING YOUR VEHICLE

because the infant has a medical condition which makes it necessary for the driver to be able to see the infant,

- is a child, age 1 to 12 who must ride in the front seat because there is no rear seat, because there is no rear seat position available, or because the child has a medical condition which makes it necessary for the driver to be able to see the child,
- has a medical condition which makes passenger airbag inflation (deployment) a greater risk for the passenger than the risk of hitting the dashboard (instrument panel) or windshield in a crash.

WARNING!

Whenever an airbag is turned off, even a lap/shoulder belted passenger may hit their head, neck, or chest on the dashboard (instrument panel) or windshield in a crash. This may result in serious injury or death.

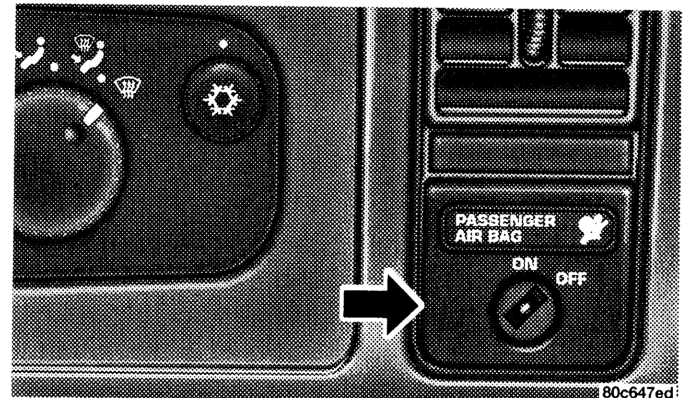

NOTE: The Passenger Airbag On/Off Switch is not available in the Quad Cab.

To Shut Off the Passenger Airbag

Place the ignition key in the Passenger Airbag On/Off Switch, push the key in and turn clockwise, and remove the key from the switch. This will shut off the passenger side airbag. The "Off" light near the switch will illuminate when the ignition switch is turned to the ON position.

To Turn On the Passenger Airbag

Place the ignition key in the Passenger Airbag On/ Off Switch, push the key in and turn counterclockwise, and remove the key from the switch. This will turn on the passenger airbag. The "Off" light near the switch will be off when the ignition switch is turned to the ON position.

If A Deployment Occurs

The airbag system is designed to deploy when the air bag control module detects a moderate-to-severe frontal collision, and then immediately to deflate.

NOTE: A frontal collision that is not severe enough to need airbag protection will not activate the system. This does not mean something is wrong with the airbag system.

If you do have a collision which deploys the airbags, any or all of the following may occur:

- The nylon airbag material may sometimes cause abrasions and/ or skin reddening to the driver and front passenger as the airbags deploy and unfold. The abrasions are similar to friction rope burns or those you might get sliding along a carpet or gymnasium

floor. They are not caused by contact with chemicals. They are not permanent and normally heal quickly. However, if you haven't healed significantly within a few days, or if you have any blistering, see your doctor immediately.

- As the airbags deflate you may see some smoke-like particles. The particles are a normal by-product of the process that generates the nontoxic gas used for airbag inflation. These airborne particles may irritate the skin, eyes, nose, or throat. If you have skin or eye irritation, rinse the area with cool water. For nose or throat irritation, move to fresh air. If the irritation continues, see your doctor. If these particles settle on your clothing, follow the garment manufacturer's instructions for cleaning.
- It is not advisable to drive your vehicle after the airbags have deployed. If you are involved in another collision, the airbags will not be in place to protect you.

2

Airbag Light

You will want to have the airbags ready to inflate for your protection in an impact. While the airbag system is designed to be maintenance free, if any of the following occurs, have an authorized dealer service the system promptly:

- The airbag light does not come on or flickers during the 6 to 8 seconds when the ignition switch is first turned on.
- The light remains on or flickers after the 6 to 8 second interval.
- The light flickers or comes on and remains on while driving.

NOTE: If the speedometer, tachometer or any engine related gauges are not working, the airbag control module may also be disabled. The airbags may not be ready to inflate for your protection. Promptly check fuse numbers 18 and 19 in the fuse block. See your dealer if the fuse is good.

Child Restraint

Everyone in your vehicle needs to be buckled up all the time -babies and children, too. Every state in the United States and all Canadian provinces require that small children ride in proper restraint systems. This is the law, and you can be prosecuted for ignoring it.

Children 12 years and under should ride properly buckled up in a rear seat, if available. According to crash statistics, children are safer when properly restrained in the rear seats rather than in the front.

WARNING!

In a collision, an unrestrained child, even a tiny baby, can become a missile inside the vehicle. The force required to hold even an infant on your lap can become so great that you could not hold the child, no matter how strong you are. The child and others could be badly injured. Any child riding in your vehicle should be in a proper restraint for the child's size.

2

WARNING!

Deployed airbags can't protect you in another collision. Have the airbags replaced by an authorized dealer as soon as possible.

Enhanced Accident Response System

If the airbags deploy after an impact and the electrical system remains functional, vehicles equipped with power door locks will unlock automatically. In addition, approximately 10 seconds after the vehicle has stopped moving, the interior lights will light until the ignition switch is turned off.

Maintaining Your Airbag Systems**WARNING!**

- Modifications to any part of the airbag system could cause it to fail when you need it. You could be injured because the airbags are not there to protect you. Do not modify the components or wiring, including adding any kind of badges or stickers to the steering wheel hub trim cover or the upper right side of the instrument panel. Do not modify the front bumper, vehicle body structure, or frame.
- You need proper knee impact protection in a collision. Do not mount or locate any aftermarket equipment on or behind the knee bolster.
- It is dangerous to try to repair any part of the airbag system yourself. Be sure to tell anyone who works on your vehicle that it has airbags.

Infants and Small Children

There are different sizes and types of restraints for children from newborn size to the child almost large enough for the adult seat belt. Use the restraint that is correct for your child:

- The rearward-facing infant restraint is for babies weighing up to about 20 lbs.(9 kg), and less than one year old. The infant restraint must NEVER be used in the front seat of a vehicle with a passenger side airbag, unless the airbag is turned off. An airbag deployment could cause severe injury or death to infants in this position. The infant carrier is held in the vehicle by the lap belt or lap/ shoulder belt.
- Children under one year of age should continue to ride in a rear-facing infant seat, even if they weigh more than 20 lbs. (9 kg). A "convertible" child seat, one that is designed to be used either rearward-facing or forward-facing, should be used for children who are too heavy for the infant carrier, but who are too young to face forward in the vehicle.
- The forward-facing child seat is for children from about 20 lbs. to 40 lbs.(9 to 18 kg.), and more than one year old. The child seat is held in the vehicle by the lap / shoulder belt.
- The belt-positioning booster seat is for children weighing more than 40 lbs.(18 kg). The child and booster seat are held in the vehicle by the lap/shoulder belt. (Some booster seats are equipped with a front shield and are held in the vehicle by the lap portion or lap belt.)