

REPORT NUMBER TR-P23001-11-NC

**NEW CAR ASSESSMENT PROGRAM
FRONTAL BARRIER IMPACT TEST**

**MITSUBISHI MOTORS CORPORATION
2003 MITSUBISHI OUTLANDER
4 DOOR SUV**

NHTSA NUMBER: M35602

**PREPARED BY:
KARCO ENGINEERING, LLC
9270 HOLLY ROAD
ADELANTO, CALIFORNIA 92301**



FEBRUARY 20, 2003

FINAL REPORT

**PREPARED FOR:
U.S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
RULEMAKING
OFFICE OF CRASHWORTHINESS STANDARDS
MAIL CODE: NVS-111
400 SEVENTH STREET, SW, ROOM 5311
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Safety Administration, in response to Contract Number DTNH22-01-D-02005.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: _____
Mr. James E. Gorth, Project Engineer
KARCO Engineering, LLC

Date: MARCH 5, 2003

Reviewed by: _____
Mr. Jerry L. Kratzke, Director of Operations
KARCO Engineering, LLC

Date: MARCH 5, 2003

Approved by: _____
Mr. Frank D. Richardson, Program Manager
KARCO Engineering, LLC

Date: MARCH 5, 2003

FINAL REPORT ACCEPTED BY:

Manager, New Car Assessment Program

Date of Acceptance

COTR, NCAP Frontal Impact Program

Date of Acceptance

Technical Report Documentation Page

1. Report No. TR-P23001-11-NC	2. Government Accession No.	3. Recipients Catalog No.			
4. Title and Subtitle Final Report of New Car Assessment Program 2003 Mitsubishi Outlander 4 Door SUV NHTSA No. M35602		5. Report Date March 5, 2003			
		6. Performing Organization Code KAR			
7. Authors Mr. James E. Gorth, Project Engineer, Karco Mr. Frank Richardson, Project Manager, Karco		8. Performing Organization Report No. TR-P23001-11-NC			
9. Performing Organization Name and Address KARCO Engineering, LLC 9270 Holly Road Adelanto, CA 92301		10. Work Unit No.			
		11. Contract or Grant No. DTNH22-01-D-02005			
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Rulemaking Office of Crashworthiness Standards Mail Code: NVS-111 400 Seventh Street, SW, Room 5311 Washington, D.C 20590		13. Type of Report and Period Covered Final Test Report Option Year 2			
		14. Sponsoring Agency Code DOT/NHTSA/NRM/OCS/NVS-111			
15. Supplementary Notes					
16. Abstract A 35mph (56.3 km/h) frontal barrier impact was conducted on a 2003 Mitsubishi Outlander 4 Door SUV Sedan at KARCO Engineering, LLC on 2/20/03. This test was conducted to obtain data indicant of FVMSS 208, 212, 219 (partial), 301, and footwell intrusion performance. The impact velocity is 56.31 km/h. The ambient temperature at the barrier face at the time of impact is 14.4 degrees Celcius. The test vehicle sustained post-impact maximum static crush of 430 mm at the vehicle centerline. The test vehicle is equipped with a 3-point continuous belt system and second generation supplemental airbags in both front outboard seating positions. With respect to FMVSS 208 "Occupant Crash Protection", the occupant injury criteria summary is as follows:					
Measurement Description		Units	Threshold	Driver ATD	Pass. ATD
Head Injury Criteria (HIC)		N/A	1000	377.1	786.3
Max. Thorax Accel. (3 msec clip)		G's	60	46.7	40.9
Left Femur Force		Newtons	10000	-2170.1	-2533.3
Right Femur Force		Newtons	10000	-2406.7	-2211.7
17. Key Words 56.3 km/h NCAP Frontal Barrier Impact Test New Car Assessment Program (NCAP) 2003 Mitsubishi Outlander 4 Door SUV NHTSA No. M35602			18. Distribution Statement Copies of this report available from: NHTSA Technical Reference Division National Highway Traffic Safety Admin. 400 Seventh St., SW, Room 5108 Washington, D.C. 20590		
19. Security Classification (this report) Unclassified		20. Security Classification (this page) Unclassified		21. No. Pages 486	22. Price

Form DOT F1700.7 (8-72)

TABLE OF CONTENTS

<u>Section</u>	<u>Description</u>	<u>Page</u>
1	Purpose and Summary of Test M35602	1
2	Occupant and Vehicle Information/Data Sheets	3

<u>Data Sheet</u>	<u>Description</u>	<u>Page</u>
1	Crash Test Summary	4
2	General Test and Vehicle Parameter Data	5
3	Post Impact Data	8
4	Test Vehicle Information	9
5	Dummy Positioning in Vehicle	11
6	Seatbelt Positioning Data	13
7	Vehicle Accelerometer Location and Data Summary	14
8	Hybrid III ATD Injury Criteria and Sensor Data	15
9	Seatbelt Assessment Test Data	18
10	Summary of FMVSS 212 Data	19
11	Windshield Zone Intrusion FMVSS 219 Data (Partial)	20
12	FMVSS 301 Fuel System Integrity Post Impact Data	21
13	FMVSS 301 Static Rollover Data	22
14	Vehicle Measurements	24
15	Camera Locations	27
16	Photographic Reference Target Locations	28
17	Vehicle Intrusion Measurements	29
18	Fixed Barrier Load Cell Locations	33
19	Accident Investigation Division Data	34
20	Dummy/Vehicle Temperature Stabilization	35

<u>Appendix</u>	<u>Description</u>	<u>Appendix</u>
A	Photographs	A
B	Dummy and Vehicle Response Data Traces	B
C	Load Cell Barrier Data Traces	C
D	Instrumentation and Data Channel Assignments	D
E	Dummy Calibration Data Traces and Tables	E
F	Child Restraint System	F

SECTION 1

PURPOSE AND SUMMARY OF TEST M35602

1.1 PURPOSE

This 35 mph (56.3 km/h) frontal barrier impact test is part of the Vehicle Barrier Impact Testing Program sponsored by the National Highway Traffic Safety Administration (NHTSA) under Contract No. DTNH22-01-D-02005. The purpose of this test was to obtain vehicle crashworthiness and occupant restraint system performance data for an impact speed in excess of the current 30 mph (48.3 km/h) requirements.

The 35 mph (56.3 km/h) frontal barrier impact test was conducted in accordance with the Office of Crashworthiness Standards Laboratory Test procedure.

1.2 SUMMARY

A load cell barrier consisting of 36 load cells was impacted by a 2003 Mitsubishi Outlander 4 Door SUV at a velocity of 56.31 km/h. The test was performed at Karco Engineering, LLC on February 20, 2003.

One real-time and 17 high-speed cameras were used to document the frontal barrier impact event. Camera locations and other pertinent camera information can be found in this report.

Two Part 572E, 50th percentile male anthropomorphic test devices (ATDs), were placed in the driver and right-front passenger seating positions according to dummy placement instructions specified in the Laboratory Indicant Test Procedure.

Both ATDs were fully instrumented with head (primary and redundant), chest (primary and redundant) and pelvis triaxial accelerometers, chest displacement potentiometers, six-axis upper neck transducers, right/left femur load cells, and lower leg instrumentation. Load cells were also placed on the driver's and passenger's lap belts to measure pelvic section loading. The driver (position 1) ATD (Serial No. 34) and the right-front passenger (position 2) ATD (Serial No. 35) were calibrated one test prior to this test.

Ninety Seven (97) channels of data were recorded using an on-board data acquisition system. Appendix A contains Pre and Post Test Photographs. Appendix B contains the vehicle and dummy response data traces. Appendix C contains Load Cell Barrier information. Appendix D contains the Instrumentation Data Channel assignments. Appendix E contains the Dummy Calibration Data and Appendix F contains the Child Restraint System (CRS).

There was 100 percent windshield retention and no intrusion into the protected zone of the windshield during the impact event. There was no Stoddard solvent leakage after the event or during any phase of the static rollover.

The maximum static crush of the vehicle was 430 mm and both the driver and the passenger side doors remained closed during the impact event and were operable after the impact.

The driver's visible contact points were as follows: The driver ATD head contacted the airbag and headrest, its chest contacted the airbag and seat belt and its abdomen contacted the seatbelt. The left knee contacted the dash/steering column and the right knee contacted the dash.

The passenger's visible contact points were as follows: The passenger ATD head contacted the airbag, headrest and side header. The chest contacted the airbag and seatbelt. Its abdomen contacted the seatbelt. Both knees contacted the dash.

Occupant injury data is contained in table below.

OCCUPANT DATA SUMMARY						
ATD Position	HIC	Clip (g)	Chest Disp (mm)	Left Femur (N)	Right Femur (N)	Belt Spool (mm)
Driver	377.1	46.7	-31.2	-2170.1	-2406.7	206.6
Passenger	786.3	40.9	-33.9	-2533.3	-2211.7	268.4

SECTION 2
OCCUPANT AND VEHICLE INFORMATION/DATA SHEETS

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
Test Date: 2/20/03

CONVERSION FACTORS USED IN THIS REPORT*

Quantity	Typical Application	Std Units	Metric Unit	Multiply By
Mass	Vehicle Weight	lb	kg	0.4536
Linear Velocity	Impact Velocity	mile/h	km/h	1.609
Length or Distance	Measurements	in	mm	25.4
Volume	Fuel Systems	gal	liter	3.785
Volume	Small Fluids	oz	mL	29.573
Pressure	Tire Pressures	lbf/in ²	kPa	7.0
Volume	Liquid	gal	liter	3.785
Temperature	General Use	°F	°C	$=(t_f - 32)/1.8$
Force	Dynamic Forces	lbf	N	4.448
Moment	Torque	lbf/ft	Nm	1.355

* Based on the Recommended Practice in SAE J916, May 85

DATA SHEET NO. 1
CRASH TEST SUMMARY

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
Test Date: 2/20/03

PRIMARY IMPACT DATA

Measured Parameter	Units	Value
Velocity at Impact	km/h	56.31
Test Weight	kg	1652
Impact Angle	degrees	0
Average Rebound	mm	1252
Maximum Static Crush	mm	430

DOOR OPENING AND SEAT TRACK INFORMATION

Description	Driver	Passenger
Front Door Opening	Remained closed, opened w/o tools	Remained closed, opened w/o tools
Seat Track Shift (mm)	Remained closed, opened w/o tools	Remained closed, opened w/o tools
Seat Track Shift (mm)	None	None
Seat Back Failure	None	None

TEST DUMMY INFORMATION

Description	Driver	Passenger
Dummy Type / Serial No.	50% Male Hybrid III / No. 34	50% Male Hybrid III / No. 35
Head Contact	Airbag/Headrest	Airbag/Headrest/Side Header
Chest Contact	Airbag/Belt	Airbag/Belt
Abdomen Contact	Belt	Belt
Left Knee Contact	Steering Column/ Dash	Dash
Right Knee Contact	Dash	Dash

16mm MOVIE COVERAGE

High Speed	17
Real Time	1
Total	18

DATA CHANNELS

Driver ATD Sensors	40
Passenger ATD Sensors	40
Belt Assessment Sensors	8
Vehicle Structure Accelerometers	9
Rigid Barrier Load Cells	36
Total	133

DATA SHEET NO. 2
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
 Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
 Test Date: 2/20/03

TEST VEHICLE INFORMATION

Make	Mitsubishi
Model	Outlander
Body Style	4 Door
NHTSA No.	M35602
VIN	JA4LX31G33U051327
Color	White
Delivery Date	2/14/2003
Odometer Reading (mi.)	29
Dealer	Victorville Mitsubishi
Transmission	4 Speed Automatic
Final Drive	Front
Type/No. Cylinders	In-Line 4
Engine Displacement (L)	2.4
Engine Placement	Transverse
Roof Rack	No
Sunroof/T-Top	No
Tinted Glass	No
Traction Control	No
Power Brakes	Yes
Front Disc	Yes
Rear Disc	No

TEST VEHICLE OPTIONS

Anti-Lock Brakes (ABS)	No
All Wheel Drive	No
Power Steering	Yes
Driver Airbag	Yes
Driver Side Bag	No
Driver Head Bag	No
Pass. Airbag	Yes
Pass. Side Bag	No
Pass. Head Bag	No
Pre-tensioners	Yes
Load Limiters	Yes
Bucket Seats	Yes
Center Console	Yes
Air Cond.	Yes
AM/Fm Cassette	Yes
Tilt Steering	Yes
Power Door Locks	Yes
Power Windows	Yes
Power Seats	No
Other	

DATA FROM CERTIFICATION LABEL

Manufactured By	Mitsubishi Motor Corporation	GWR (kg)	1880
Date of Manufacture	October-03	GAWR Front (kg)	1050
		GAWR Rear (kg)	1065

VEHICLE SEATING AND CAPACITY WEIGHT INFORMATION

Measured Parameter	Front	Rear	Third	Total
Type of Seats	Bucket	Bench	None	
Number of Occupants	2	3		5
Capacity Wt. (VCW) (kg)				375
Cargo Weight (RCLW) (kg)				35

DATA SHEET NO. 2.....(CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
 Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
 Test Date: 2/20/03

TIRE INFORMATION

Measured Parameter	Front	Rear
Max. Tire Pressure (kPa)	308	308
Cold Pressure (kPa)	200	200
Recommend Tire Size	P225/60R16	P225/60R16
Tire Size on Vehicle	P225/60R16	P225/60R16
Tire Manufacturer	Yokohama	Yokohama
Treadwear	180	180
Traction	B	B
Temperature Grades	A	A
Tire Plies Sidewall	1	1
Tire Plies Body	3	3
Load Index/Speed Symbol	98 S	98 S
Tire Material	Nylon/Polyester/Steel	Nylon/Polyester/Steel
DOT Safety Code Right	FDA6-NTD4-102	FDA6-NTD4-102
DOT Safety Code Left	FDA6-NTD4-102	FDA6-NTD4-102

DATA SHEET NO. 2...(CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
 Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
 Test Date: 2/20/03

TEST VEHICLE WEIGHTS

	Units	As Delivered (UVW)			As Tested (ATW)		
		Front Axle	Rear Axle	Total	Front Axle	Rear Axle	Total
Left	kg	443	298		485	348	
Right	kg	433	297		474	345	
Ratio	%	59.5	40.5		58.0	42.0	
Totals	kg	876	595	1471	959	693	1652

TARGET TEST WEIGHT CALCULATION

Measured Parameter	Units	Value
Total Delivered Weight (UVW)	kg	1471
Weight of 2 P572 ATD's	kg	152
Rated Cargo/Luggage Weight (RCLW)	kg	35
Calculated Vehicle Target Weight (TVTW)	kg	1658

TEST VEHICLE ATTITUDE AND CG

	Units	LF	RF	LR	RR	CG (aft of front axle)
As Delivered	mm	784	786	791	789	1065
As Tested	mm	766	772	768	770	1105

Vehicle Wheel base (mm): 2630

Weight of Ballast secured in cargo area (kg): 83

Vehicle Components Removed: Rear lights, muffler, rear bumper and hatchback

* Ballast weight does not include cameras, instrumentation, and brake abort system.

FUEL SYSTEM DATA

Fuel System Capacity From Owner's Manual (L): 59.4

Usable Capacity Figure Furnished by COTR (L): 59.4

Actual Test Volume with entire fuel System Filled (L): 19.61*

Test Fluid Type: Stoddard Solvent ; Specific Gravity: 0.764

Kinematic Viscosity: as per ASTM Standard D484-71 ; Color: Purple

Is Vehicle Fuel Pump Electric or Mechanical?: Electric

If electric, does pump operate with ignition switch "ON" & engine "OFF"? Yes

Fuel System Particulars: Driver side filler door, tank mounted at rear.

* Note: Solvent level decreased to make target test weight

**DATA SHEET NO. 3
POST IMPACT DATA**

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
Test Date: 2/20/03

SPEED TRAP DATA

Measured Parameter	Units	Requirement	Value
Trap No. 1 Velocity (Primary)	km/h	55.51 to 57.12	56.31
Trap No. 1 Entry Distance	mm	< 1524	1524
Trap No. 1 Exit Distance	mm	< 1524	305
Trap No. 2 Velocity (Redundant)	km/h	55.51 to 57.12	56.33
Trap No. 2 Entry Distance	mm	< 1524	1524
Trap No. 2 Exit Distance	mm	< 1524	305

VEHICLE STATIC CRUSH

Measured Parameter	Units	Pre-Test	Post-Test	Difference
Left Side	mm	4234	4009	-225
Center	mm	4454	4024	-430
Right Side	mm	4234	3990	-244

VEHICLE REBOUND FROM BARRIER

Measured Parameter	Units	Value
Left Side	mm	1295
Center	mm	1225
Right Side	mm	1235
Average	mm	1252


DATA SHEET NO. 4
TEST VEHICLE INFORMATION

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
Test Date: 2/20/03

NOMINAL DESIGN RIDING POSITION

The driver and passenger seat backs are positioned to the manufacturers designated angle. The procedure is as follows: A special application tool with pointed probes is inserted through the fabric to make contact with the rigid portion of the lower seat frame assembly, approximately 13 inches above the pivot point of the seat back. An inclinometer is placed against the flat surface of the tool and the seat back angle is measured directly from the dial face.

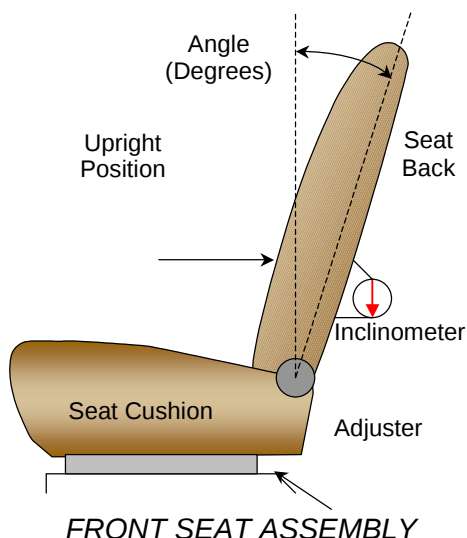

SEAT BACK ANGLES

	Deg.
Driver w/seated Dummy	17
Passenger w/seated Dummy	17

SEAT FORE/AFT POSITIONS

The first or forward most position is counted as number one (1). The fore/aft position is set aft of the middle position for both the driver and passenger.

SEAT FORE/AFT POSITIONING

	Total Fore/Aft Travel	Placed in Position #
Driver Seat	23	12
Passenger Seat	23	12

SEAT BELT UPPER ANCHORAGE

Position number one (1) is the uppermost position.

SEAT BELT UPPER ANCHORAGE


	Total # of Positions	Placed in Position #
Driver Seat	5	3
Passenger Seat	5	3

DATA SHEET NO. 4...(CONTINUED)**TEST VEHICLE INFORMATION**Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUVNHTSA No.: M35602Test Program: 2003 NHTSA 35mph NCAPTest Date: 2/20/03**FUEL TANK CAPACITY DATA**


	Liters
Usable Capacity of "Standard Tank"	59.4
Usable Capacity of "Optional Tank"	N/A
Usable Capacity used for FMVSS 301	54.66 to 55.83
Actual Amount of Solvent Used	19.61*

*Note: Solvent level decreased to make target test weight

The test vehicle is equipped with an electric fuel pump. The fuel pump operates for approximately two seconds after the ignition is placed in the "ON" position, after which the fuel pump automatically shuts off. The fuel filler door is located on the left rear fender. The standard fuel tank occupies the area under the rear seat.

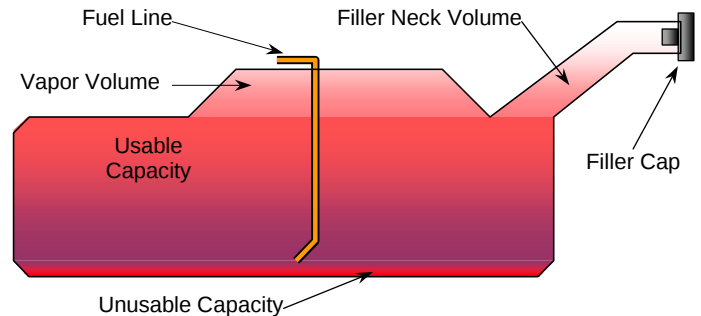**VEHICLE FUEL TANK ASSEMBLY****STEERING COLUMN ADJUSTMENT**

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes when moved through its full range of motion. An aluminum plate is placed across the rim of the steering wheel, an inclinometer is placed on the plate and the angle is measured.

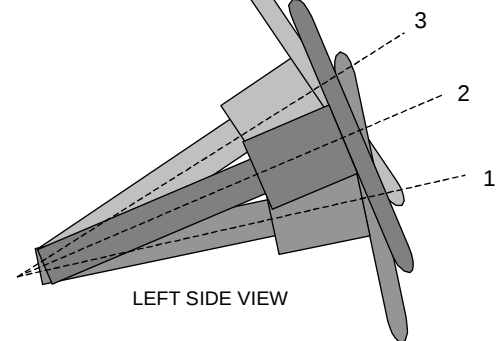**LEFT SIDE VIEW****STEERING COLUMN ASSEMBLY****STEERING COLUMN POSITIONS**

	Degrees
Lowermost; position No. 1	20
Geometric center; position No. 2	22.5
Uppermost; position No. 3	25

DATA SHEET NO. 5
DUMMY POSITIONING IN VEHICLE

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
Test Date: 2/20/03


TEST DUMMY POSITION MEASUREMENTS

Code	Measurement Description	Driver		Passenger	
		Length (mm)	Angle (°)	Length (mm)	Angle (°)
WA	Windshield Angle		31		
SWA	Steering Wheel Angle		67.5		
SCA	Steering Column Angle		22.5		
SA	Seat Back Angle		17.0		17.0
HZ	Head to Roof (Z)	195	90	185	90
HH	Head to Header	395		370	
HW	Head to Windshield	630		635	
HR	Head to Side Header (Y)	285		285	
NR	Nose to Rim	378	16		
CD	Chest to Dash	550		525	
CS	Chest to Steering Hub	280			
RA	Rim to Abdomen	175			
KDL	Left Knee to Dash	135	11	140	
KDR	Right Knee to Dash	133		143	18
PA	Pelvic Angle		23		23
TA	Tibia Angle		50		47
KK	Knee to Knee (Y)	287		285	
ST	Striker to Head	630	8	640	6
SK	Striker to Knee	500	74	505	75
SH	Striker to H-Point	238		238	
SHY	Striker to H-Point (Y)	208		228	
HS	Head to Side Window	315		317	
HD	H-Point to Door (Y)	132		138	
AD	Arm to Door (Y)	105		45	

DATA SHEET NO. 5...(CONTINUED) **DUMMY POSITIONING IN VEHICLE**

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
 Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
 Test Date: 2/20/03

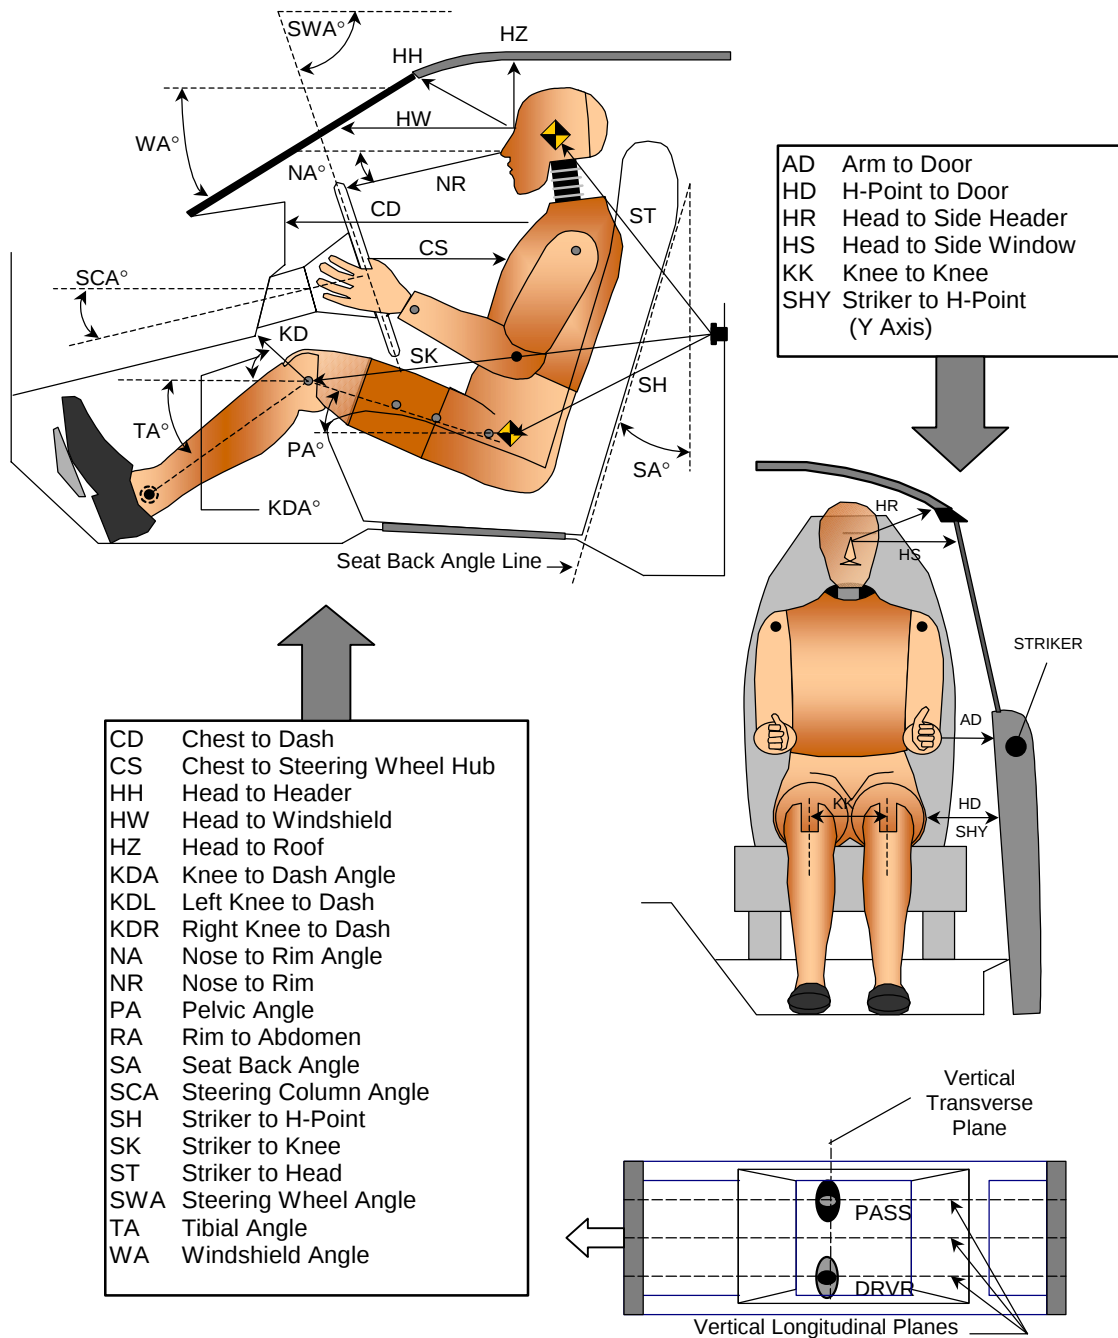


DUMMY MEASUREMENTS FOR FRONT SEAT OCCUPANTS

DATA SHEET NO. 6 **SEATBELT POSITIONING DATA**

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
 Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
 Test Date: 2/20/03

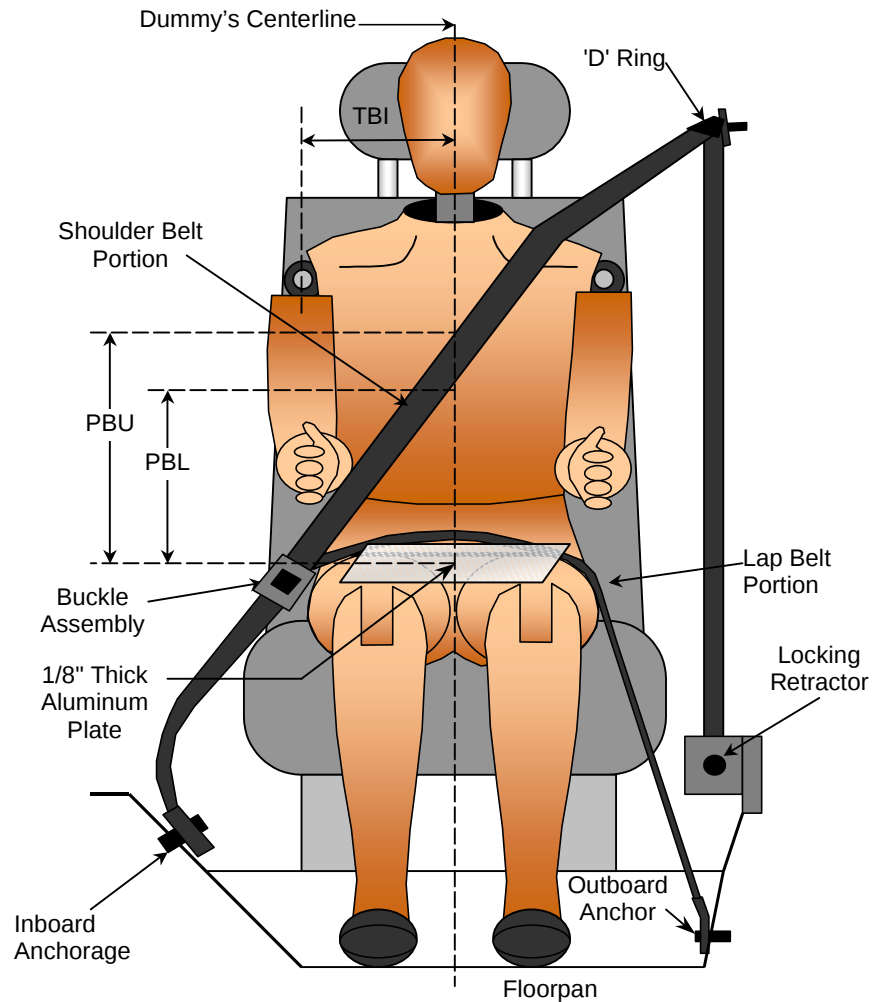

SEAT BELT POSITIONING MEASUREMENTS

Measurement Description	Units	Driver	Passenger
TBI - Dummy C/L to Lap/Shoulder Belt Intersect	mm	270	265
PBU - Top surface of reference to belt upper edge	mm	300	285
PBL - Top surface of reference to belt lower edge	mm	228	200
Lap Belt tension	Newton's	10	10
Shoulder Belt tension	N/A	Retractor	Retractor

DATA SHEET NO. 7 - VEHICLE ACCELEROMETER LOCATION AND DATA SUMMARY

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

NHTSA No.: M35602

Test Program: 2003 NHTSA 35mph NCAP

Test Date: 2/20/03



VEHICLE ACCELEROMETER PEAK DATA AND PRE-TEST LOCATIONS

No.	Accelerometer Location	Measurements (mm)			Peak Values				
		X	Y	Z	Units	Max	Time	Min	Time
1	Left Rear X-Member	1720	-670	425	G's	1.8	119.3	-44.6	36.9
2	Right Rear X-Member	1630	640	390	G's	0.0	0.0	0.0	0.0
3	Engine Top	3790	-40	810	G's	16.8	53.3	-154.3	31.6
4	Engine Bottom	3790	240	200	G's	0.0	0.0	0.0	0.0
5	Left Brake Caliper	3710	-700	260	G's	9.8	98.1	-77.5	38.3
6	Right Brake Caliper	3710	700	260	G's	41.5	69.1	-107.7	51.2
7	Instrument Panel	2920	0	980	G's	13.7	30.3	-97.4	46.7
8	Left Rear X-Member (Z-Axis)	1630	-670	425	G's	11.6	62.5	-2.5	54.5
9	Right Rear X-Member (Z-Axis)	1630	670	425	G's	0.0	0.0	0.0	0.0

Reference Planes: X=From Rear Surface of Vehicle, Y=Vehicle Centerline, Z=Ground Plane

1.) Channel failed, no data

2.) Channel failed at 69.6 msec.

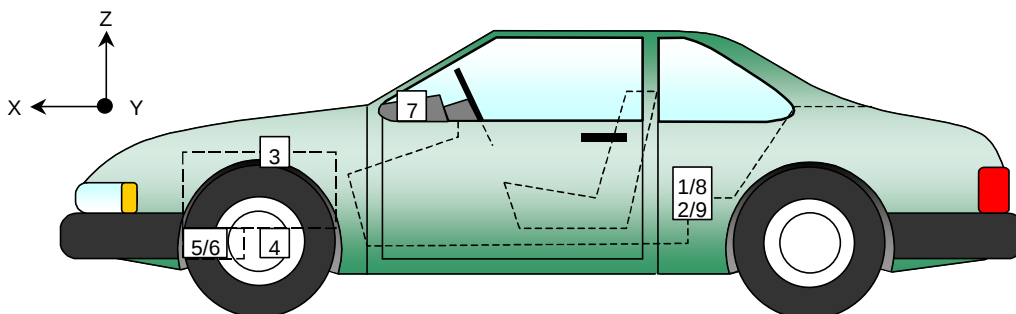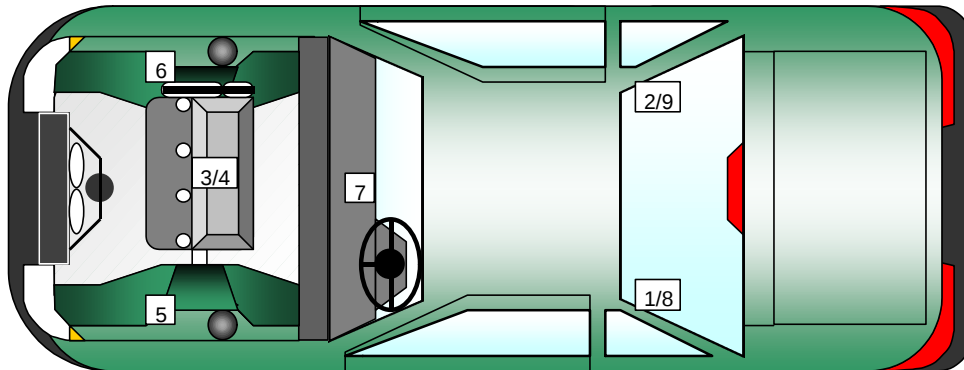

DATA SHEET NO. 8 - HYBRID III ATD INJURY CRITERIA AND SENSOR DATA

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

NHTSA No.: M35602

Test Program: 2003 NHTSA 35mph NCAP

Test Date: 2/20/03

HEAD PRIMARY PEAK ACCELERATIONS

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Head CG	X	G's	12.5	214.5	-53.6	82.5	11.1	207.9	-65.1	83.0
Head CG	Y	G's	6.8	143.4	-4.7	208.3	3.2	199.6	-21.2	95.8
Head CG	Z	G's	25.4	59.5	-8.3	95.0	29.0	59.7	-15.5	97.9
Head CG Resultant	N/A	G's	53.7	82.5			67.9	83.0		

CHEST PRIMARY PEAK ACCELERATIONS

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Chest CG	X	G's	3.2	257.9	-48.3	60.6	3.6	249.1	-40.5	74.8
Chest CG	Y	G's	7.9	78.4	-2.1	42.4	3.4	85.2	-5.5	70.9
Chest CG	Z	G's	15.6	57.8	-17.2	97.0	12.8	58.3	-12.4	97.2
Chest CG Resultant	N/A	G's	49.2	60.6			42.0	58.9		

FEMUR PEAK FORCES

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Left Femur	Z	Newtons	694.6	42.3	-2170.1	47.8	438.4	43.6	-2533.3	66.3
Right Femur	Z	Newtons	553.2	42.3	-2406.7	62.5	582.7	46.5	-2211.7	56.2

SEAT BELT SENSOR PEAK VALUES

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Shoulder Belt Pullout	N/A	MM	206.6	89.3	-8.9	30.9	268.4	90.5	-19.5	34.3
Shoulder Belt Stretch	N/A	MM/CM	0.00	0.0	0.00	0.0	0.00	0.0	0.00	0.0
Lap Belt Force	N/A	Newtons	9995.5	60.3	-7.3	180.2	8335.9	57.6	1.4	0.0
Shoulder Belt Force	N/A	Newtons	6256.8	54.2	-72.9	138.9	4562.9	50.3	-7.5	191.9

1.) Not used with pre-tensioner

Location	Driver				Passenger			
	HIC	T ¹	T ²	Avg G	HIC	T ¹	T ²	Avg G
Head CG Primary	377.1	59.2	95.1	40.6	786.3	66.1	102.0	54.4

PRIMARY CHEST CLIP (3MSEC)

Location	Driver			Passenger		
	CLIP	T ¹	T ²	CLIP	T ¹	T ²
Chest CG Primary	46.7	59.3	62.3	40.9	57.9	60.9

DATA SHEET NO. 8...(continued)

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

NHTSA No.: M35602

Test Program: 2003 NHTSA 35mph NCAP

Test Date: 2/20/03

PELVIC PEAK ACCELERATIONS

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Pelvis	X	G's	10.7	89.4	-66.2	59.2	5.4	85.2	-70.6	55.3
Pelvis	Y	G's	10.4	78.8	-3.5	49.8	4.9	106.5	-6.2	82.1
Pelvis	Z	G's	3.4	270.6	-28.3	77.8	4.6	246.3	-25.1	72.4
Pelvis Resultant	N/A	G's	69.9	59.2			73.2	56.2		

UPPER NECK PEAK FORCES AND MOMENTS

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Neck Force	X	Newtons	238.3	218.2	-521.3	112.4	348.8	83.4	-414.7	50.3
Neck Force	Y	Newtons	137.2	106.4	-128.6	52.1	244.8	89.4	-159.2	69.7
Neck Force	Z	Newtons	1688.6	56.4	-354.3	127.5	1397.5	60.4	-543.5	251.5
Neck Force Resultant	N/A	Newtons	1694.3	56.4			1420.2	60.4		
Neck Moment	X	N•m	12.5	70.5	-16.7	93.3	14.8	97.9	-11.4	133.8
Neck Moment	Y	N•m	51.7	124.2	-40.4	76.8	15.8	83.2	-32.7	256.5
Neck Moment	Z	N•m	5.1	125.8	-7.4	89.0	29.2	107.1	-11.7	193.7
Neck Moment Resultant	N/A	N•m	52.3	124.2			35.1	256.5		

FOOT PEAK ACCELERATIONS

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Left Foot Aft	X	G's	8.5	71.6	-62.1	60.0	13.5	70.2	-151.3	47.2
Left Foot Aft	Z	G's	2.6	296.6	-38.4	41.4	36.5	57.8	-28.8	46.4
Left Foot Fore	Z	G's	1.9	10.0	-67.5	62.3	25.8	42.5	-63.3	53.3
Right Foot Aft	X	G's	30.4	76.0	-173.7	51.1	20.5	68.8	-62.6	48.6
Right Foot Aft	Z	G's	18.6	61.9	-122.4	50.8	5.1	281.2	-22.6	61.7
Right Foot Fore	Z	G's	61.2	44.8	-166.1	51.0	9.8	67.1	-53.6	47.4

1.) Passenger channel failed at 129.6 msec.

UPPER AND LOWER TIBIA PEAK FORCES AND MOMENTS

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Left Upper Moment	X	N•m	97.8	61.6	-20.4	103.3	41.4	48.9	-7.4	59.7
Left Upper Moment	Y	N•m	26.2	76.5	-58.0	59.2	58.7	50.6	-73.1	44.2
Right Upper Moment	X	N•m	20.8	121.2	-24.2	56.6	49.8	61.4	-28.6	50.9
Right Upper Moment	Y	N•m	25.6	61.4	-183.6	54.3	17.3	146.3	-88.2	75.5
Left Lower Moment	X	N•m	15.3	40.1	-48.0	65.3	47.6	82.0	-4.1	60.0
Left Lower Moment	Y	N•m	35.6	80.8	-33.0	61.5	34.0	86.1	-69.8	45.1
Left Lower Force	Z	Newtons	136.3	250.4	-1834.5	76.4	16.6	4.9	-4105.4	79.7
Right Lower Moment	X	N•m	99.6	54.4	-7.2	44.3	64.5	50.5	-7.7	32.8
Right Lower Moment	Y	N•m	71.7	60.6	-64.8	52.0	52.3	68.0	-34.2	42.7
Right Lower Force	Z	Newtons	106.4	205.5	-4548.4	53.0	161.2	235.5	-2563.5	80.1

1.) Passenger channel failed at 97.6 msec.

DATA SHEET NO. 8...(continued)

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

NHTSA No.: M35602

Test Program: 2003 NHTSA 35mph NCAP

Test Date: 2/20/03

CHEST PEAK DISPLACEMENTS

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Chest CG	X	MM	0.2	1.4	-31.2	62.0	0.2	8.3	-33.9	61.9

HEAD REDUNDANT PEAK ACCELERATIONS

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Head CG	X	G's	12.9	213.6	-52.9	83.3	11.0	207.5	-65.3	82.6
Head CG	Y	G's	6.8	143.4	-4.4	208.0	3.9	202.4	-23.0	96.9
Head CG	Z	G's	25.0	57.1	-8.8	95.2	28.7	59.6	-15.8	97.2
Head CG Resultant	N/A	G's	53.0	83.3			68.0	82.6		

CHEST REDUNDANT PEAK ACCELERATIONS

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Chest CG	X	G's	3.2	260.2	-48.3	60.6	3.5	248.4	-40.5	74.7
Chest CG	Y	G's	8.7	78.5	-1.7	45.5	3.2	85.1	-5.7	71.0
Chest CG	Z	G's	15.5	56.9	-17.6	96.9	12.7	58.2	-12.6	97.2
Chest CG Resultant	N/A	G's	49.4	60.6			42.3	59.0		

REDUNDANT HEAD INJURY CRITERIA (HIC)

Location	Driver				Passenger			
	HIC	T ¹	T ²	Avg G	HIC	T ¹	T ²	Avg G
Head CG Redundant	371.3	58.6	94.5	40.3	782.8	66.0	101.9	54.3

REDUNDANT CHEST CLIP (3MSEC)

Location	Driver			Passenger		
	CLIP	T ¹	T ²	CLIP	T ¹	T ²
Chest CG Redundant	47.2	59.2	62.2	41.2	58.0	61.0

DATA SHEET NO. 9
SEATBELT ASSESSMENT TEST DATA

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
 Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
 Test Date: 2/20/03

SEAT BELT PLACEMENT MEASUREMENTS

Measurement Description	Units	Driver	Passenger
TBI - Dummy C/L to Lap/Shoulder Belt Intersect	mm	270	265
PBU - Top surface of reference to belt upper edge	mm	300	285
PBL - Top surface of reference to belt lower edge	mm	228	200
Lap Belt tension	Newton's	10	10
Shoulder Belt tension	N/A	Retractor	Retractor

BELT LENGTH DATA

Measurement Description	Units	Driver	Passenger
Retractor reel to 'D' ring	mm	650	650
Shoulder belt length as measured on ATD	mm	885	885
Lap belt length as measured on ATD	mm	860	835
Remainder of belt on reel	mm	710	930
Total belt length for continuous webbing systems	mm	3105	3300

SHOULDER BELT SPOOL-OFF DATA

Measurement Description	Units	Driver	Passenger
As determined mechanically	mm	N/A	N/A
As determined electronically	mm	206.6	268.4

BELT STRETCH DATA

Measurement Description	Units	Driver	Passenger
Electronically between shoulder belt load cell and "D" ring	mm/cm	*	*
Mechanically	mm/cm	N/A	N/A

*Not used with shoulder belt pre-tensioner systems.

DATA SHEET NO. 10
SUMMARY OF FMVSS 212 DATA

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
 Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
 Test Date: 2/20/03


Windshield Mounting Details: Windshield glass is secured to the vehicle frame with a rubber type adhesive. No molding covers the windshield periphery at any point.

The standard requires that the posttest retention measurement be a minimum of 75 percent of the pretest total periphery measurement for vehicles not equipped with occupant passive restraints and 50 percent for each side of the windshield for vehicles that are equipped with occupant passive restraints.

Temperature of windshield molding during test: 21.1 °C

WINDSHIELD PERIPHERY MEASUREMENTS

Measurement	Pre-Test(mm)	Post-Test (mm)	% of Retention
Left Side	2040.0	2040.0	100
Right Side	2040.0	2040.0	100
Total	4080.0	4080.0	100

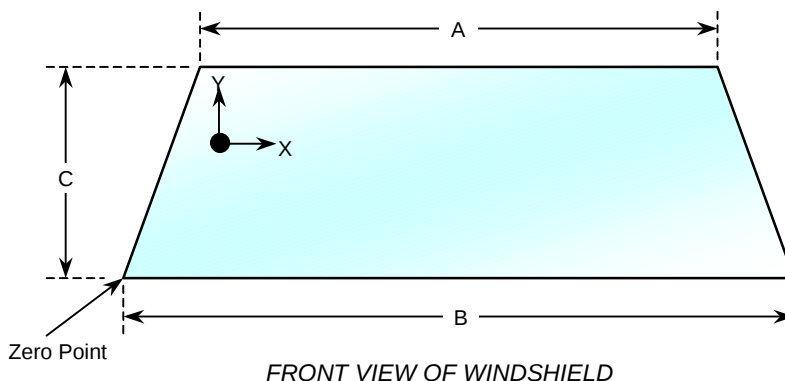


WINDSHIELD DIMENSIONS

Item	Units	Segment Length	Molding Width
A	mm	1160	19
B	mm	1400	20
C	mm	760	25
C	mm	1400	25

DATA SHEET NO. 11
WINDSHIELD ZONE INTRUSION FMVSS 219 DATA (PARTIAL)

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
 Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
 Test Date: 2/20/03

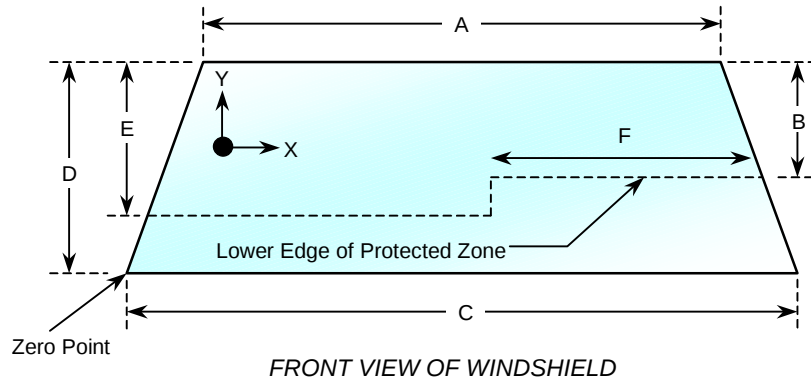

**WINDSHIELD AND
PROTECTED ZONE**

Item	Units	Value
A	mm	1160
B	mm	619
C	mm	1400
D	mm	760
E	mm	450
F	mm	280

AREA OF PROTECTED ZONE FAILURES

- A. Provide coordinates of the area that the protected zone was penetrated more than 0.25 in. by a vehicle component other than one that is normally in contact with the windshield.

X	Y
N/A	N/A
N/A	N/A
N/A	N/A
N/A	N/A

- B. Provide coordinates of the area beneath the protected zone that the inner surface of the windshield was penetrated by a vehicle component.

X	Y
N/A	N/A
N/A	N/A
N/A	N/A
N/A	N/A

DATA SHEET NO. 12
FMVSS 301 FUEL SYSTEM INTEGRITY POST IMPACT DATA

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
Test Date: 2/20/03

Test Time: 12:52 PM

Temperature at Test Time: 14.4 Deg. C


STODDARD SOLVENT SPILLAGE MEASUREMENTS

- A. From impact until vehicle motion ceases: 0.0 oz.
(Maximum Allowable = 1 ounce)
- B. For the 5 minute period after motion ceases: 0.0 oz.
(Maximum Allowable = 5 ounces)
- C. For the following 25 minutes: 0.0 oz.
(Maximum Allowable = 1 oz./minute)
- D. Spillage Location Details: No leakage occurred


DATA SHEET NO. 13
FMVSS 301 STATIC ROLLOVER DATA

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
Test Program: 2003 NHTSA 35mph NCAP



NHTSA No.: M35602
Test Date: 2/20/03

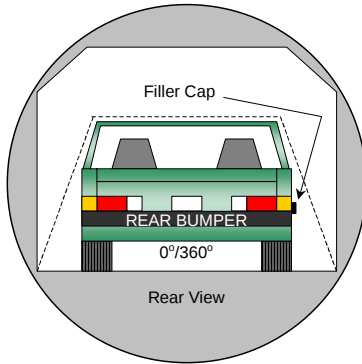


0° to 90°

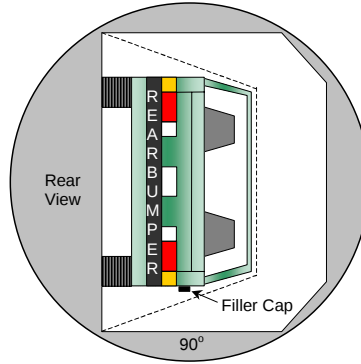


90° to 180°

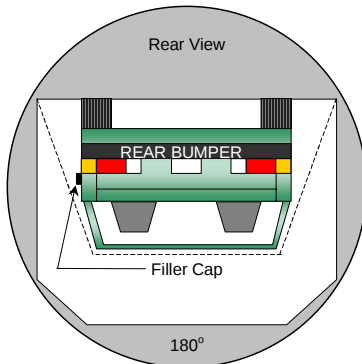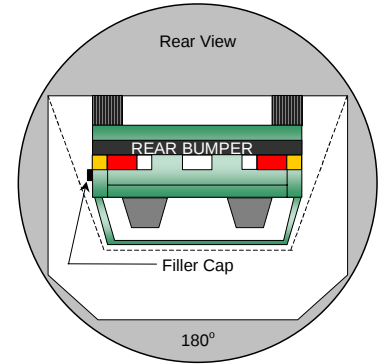

180° to 270°

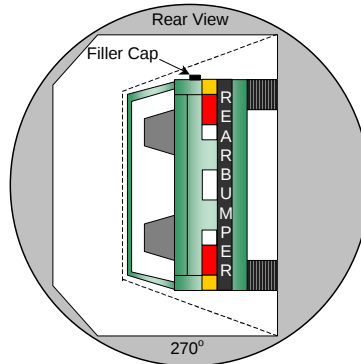

270° to 360°

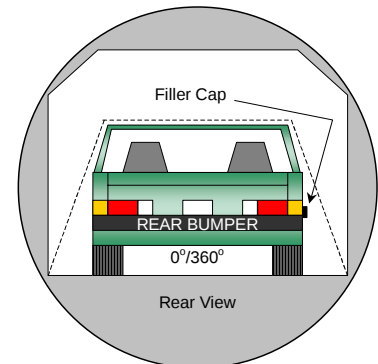

1. The specified fixture rollover rate for each 90° of rotation is 60 to 120 seconds.
2. The position hold time at each position is 300 seconds (minimum).
3. No solvent leakage occurred during rollover.

DATA SHEET NO. 13....(CONTINUED)
FMVSS 301 STATIC ROLLOVER DATA

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
 Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
 Test Date: 2/20/03

SOLVENT COLLECTION TIME TABLE IN SECONDS

Test Phase	Rotation Time	Hold Time	Total Time
0° to 90°	80	300	380
90° to 180°	84	300	384
180° to 270°	78	300	378
270° to 360°	82	300	382

FMVSS 301 SPILLAGE REQUIREMENT TABLE (oz.)

First 5 minutes	5.0
Sixth Minute	1.0
Seventh minute	1.0
Eighth Minute	1.0

ACTUAL TEST VEHICLE SOLVENT SPILLAGE (oz.)

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° to 90°	0	0	0	0
90° to 180°	0	0	0	0
180° to 270°	0	0	0	0
270° to 360°	0	0	0	0

SOLVENT SPILLAGE LOCATION TABLE

Test Phase	SPILLAGE LOCATION
0° to 90°	None
90° to 180°	None
180° to 270°	None
270° to 360°	None

DATA SHEET NO. 14
VEHICLE MEASUREMENTS

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
Test Date: 2/20/03

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
1	Total length of vehicle at centerline	mm	4454	4024	-430
2	RSOV to front of engine	mm	3838	3654	-184
3	RSOV to firewall centerline	mm	3419	3494	75
4	RSOV to leading edge of right door	mm	3097	3113	16
5	RSOV to leading edge of left door	mm	3088	3115	27
6	RSOV to lower leading edge of right door	mm	3088	3100	12
7	RSOV to lower leading edge of left door	mm	3084	3095	11
8	RSOV to upper trailing edge of right door	mm	2027	2047	20
9	RSOV to upper trailing edge of left door	mm	2020	2050	30
10	RSOV to lower trailing edge of right door	mm	2034	2050	16
11	RSOV to lower trailing edge of left door	mm	2039	2050	11
12	RSOV to bottom of right 'A' pillar	mm	3085	3100	15
13	RSOV to bottom of left 'A' pillar	mm	3079	3100	21
14	RSOV to firewall on right side	mm	3409	3474	65
15	RSOV to firewall of left side	mm	3399	3504	105
16	RSOV to steering column	mm	2692	2705	13
17	Center of steering column to left 'A' pillar	mm	410	450	40
18	Center of steering column to headlining	mm	416	460	44
19	RSOV to right side of front bumper	mm	4234	3990	-244
20	RSOV to left side of front bumper	mm	4234	4009	-225
21	Length of engine block	mm	430	430	0
RD	RSOV to right side of dash panel	mm	2880	2880	0
CD	RSOV to center of dash panel	mm	2894	3000	106
LD	RSOV to left side of dash panel	mm	2876	2890	14

DATA SHEET NO. 14.....(CONTINUED)
VEHICLE STRUCTURAL MEASUREMENTS

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
 Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
 Test Date: 2/20/03


No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
1	Total Length	mm	4454	4024	-430
2	Total Width	mm	1742	1742	0
3	Bumper Top Height	mm	726	720	-6
4	Bumper Bottom Height	mm	286	425	139
5	Longitudinal Member Top Height	mm	618	700	82
6	Longitudinal Member Bottom Height	mm	513	540	27
7	Distance Between Longitudinal Members	mm	900	1070	170
8	Longitudinal Member Width	mm	105	105	0
9	Engine Top Height	mm	819	790	-29
10	Engine Bottom Height	mm	225	195	-30
11	Engine and Gear Box Width	mm	210	210	0
12	Front Bumper to Engine Distance	mm	616	935	319
13	Front Shock Absorber Fixing Width	mm	370	190	-180
14	Bonnet Leading Edge Height	mm	835	900	65
15	Front Schock Absorber Fixing Width	mm	1115	1055	-60
16	Front Bumper to Front Axle Distance	mm	948	584	-364
17	Front Axle to A-Pillar Distance	mm	520	452	-68
18	A-Pillar to B-Pillar Distance	mm	1088	1088	0
19	B-Pillar to Rear Axla Distance	mm	1073	1070	-3
20	B-Pillar to C-Pillar Distance	mm	807	807	0
21	Roof Sill Bottom Height	mm	1444	1415	-29
22	Roof Sill Top Heigth	mm	1551	1570	19
23	Floor Sill Bottom Height	mm	280	300	20
24	Floor Sill Top Height	mm	465	500	35

All Measurements in millimeters

DATA SHEET NO. 14...(CONTINUED)
VEHICLE MEASUREMENTS

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
 Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
 Test Date: 2/20/03

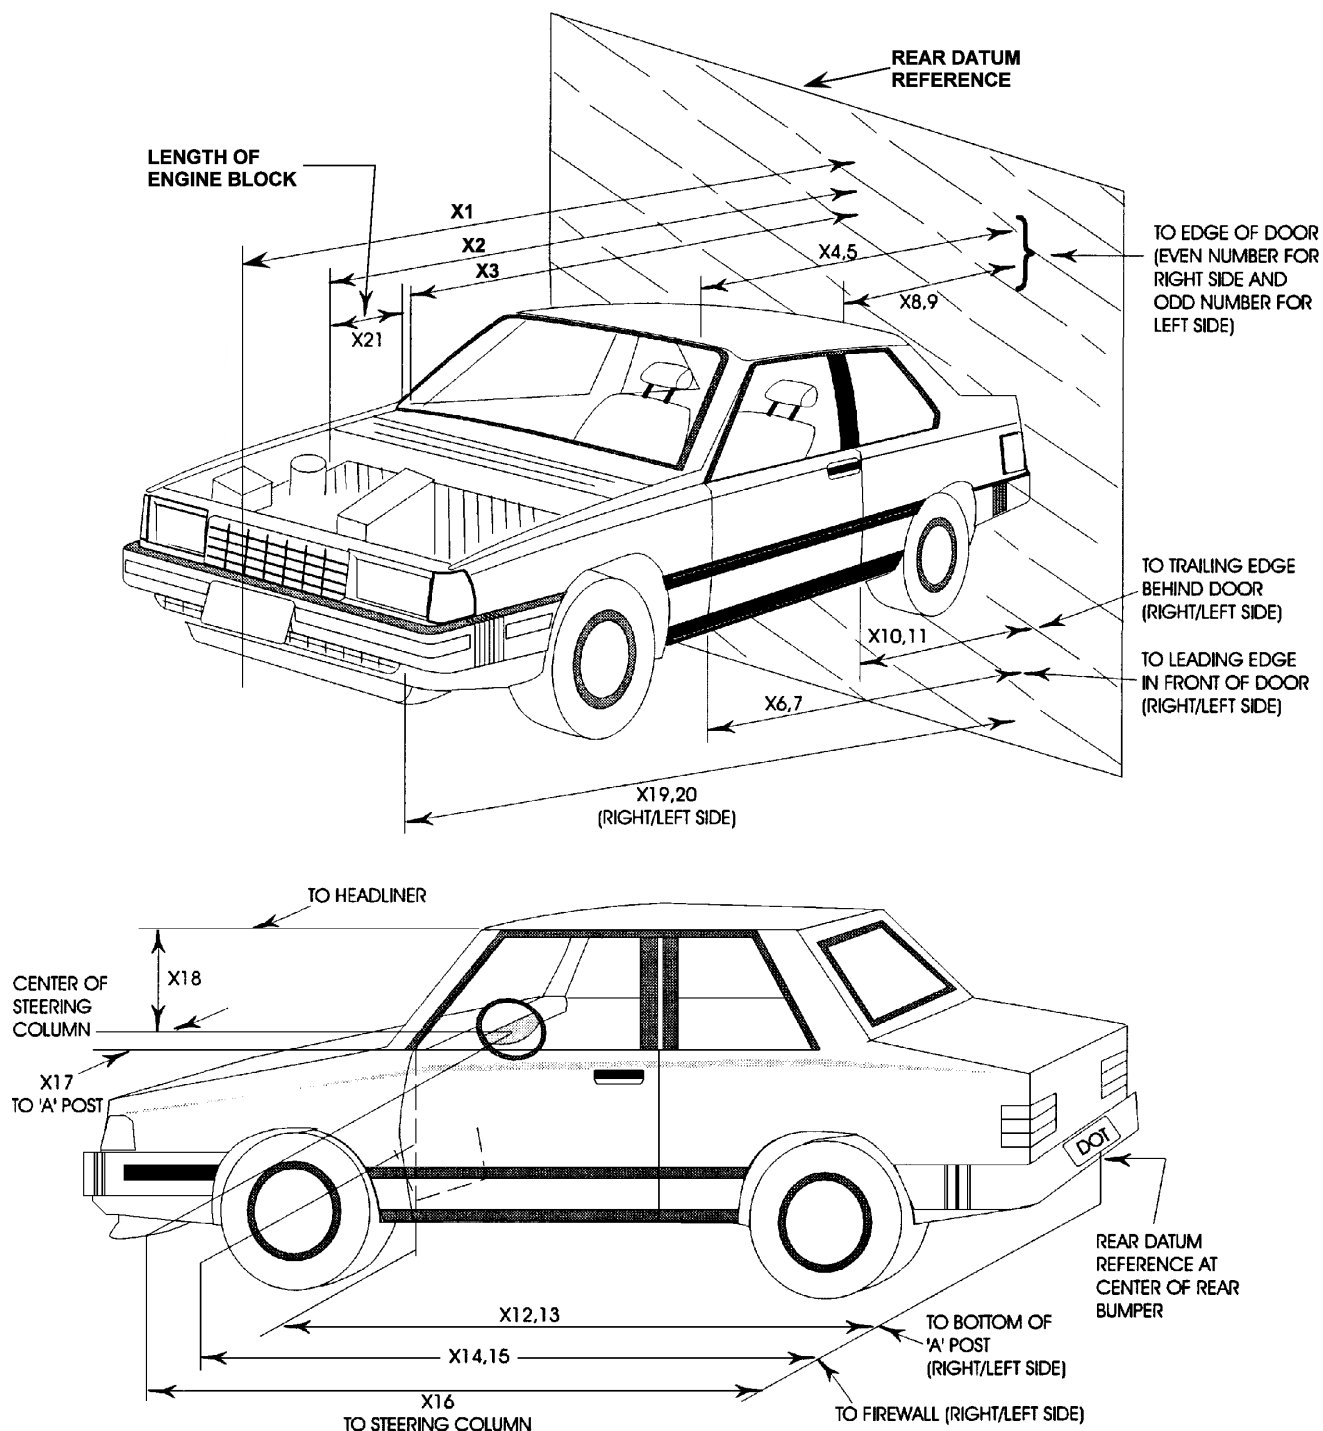

DATA SHEET NO. 15
CAMERA LOCATIONS

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
Test Date: 2/20/03

No.	Camera View	Location (mm)			Angle (Deg.)	Film Plane to Head	Lens (mm)	Speed (fps)
		X	Y	Z				
1	Right Side, Real Time	18288	-22860	2540	10	N/A	Zoom	24
2	Driver Overall	1930	8357	1321	4	7833	13	1020
2B	Driver Overall	1626	8230	1092	4	7726	17	No Time
3	Driver Close-up	1727	8230	1600	4	7727	35	990
4	3/4 Driver	6477	10185	4648	13	11067	35-85	1000
5	Steering Column	1524	8230	3404	20	8037	19	1010
6	Steering Column	1524	8230	2997	16	7936	19	DNR
7	Passenger Overall	2057	-8306	1219	6	7776	14	1000
8	Passenger Close-up	1676	-8052	1219	4	7544	35	1030
9	3/4 Passenger	8026	-8941	2997	9	10335	80	940
10	Passenger Door	2438	-13106	1524	4	12578	50	970
11	Overhead	610	0	6172	90	N/A	13	1050
12	Driver Front	-610	406	2743	40	N/A	12	990
13	Passenger Front	-610	406	2743	40	N/A	13	970
14	Pit Engine	762	0	-1499	90	N/A	10	900
15	Pit Gas Tank	3658	0	-1499	90	N/A	6	1000
16	Driver Side Child	2642	8230	2286	15	7880	35	1020
16B	Driver Side Child	2642	6096	1524	1	5681	25	DNR
17	Passenger Side Child	2438	-9144	2032	10	8768	25	No Time
17B	Passenger Side Child	2438	-8331	1524	1	7921	25	DNR

X - Barrier Face Y - Monorail Centerline Z - Ground DNR = Did Not Run


DATA SHEET NO. 16 **PHOTOGRAPHIC REFERENCE TARGET LOCATIONS**

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
 Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
 Test Date: 2/20/03

All Dimensions
 in mm

Item	Value
A	394
B	878
C	2170
D	609
E	1756
F	155
G	1700
H	1175
I	1403
J	863
K	863
L	1439
M	1175
N	1439
O	863
P	863
Q	1403

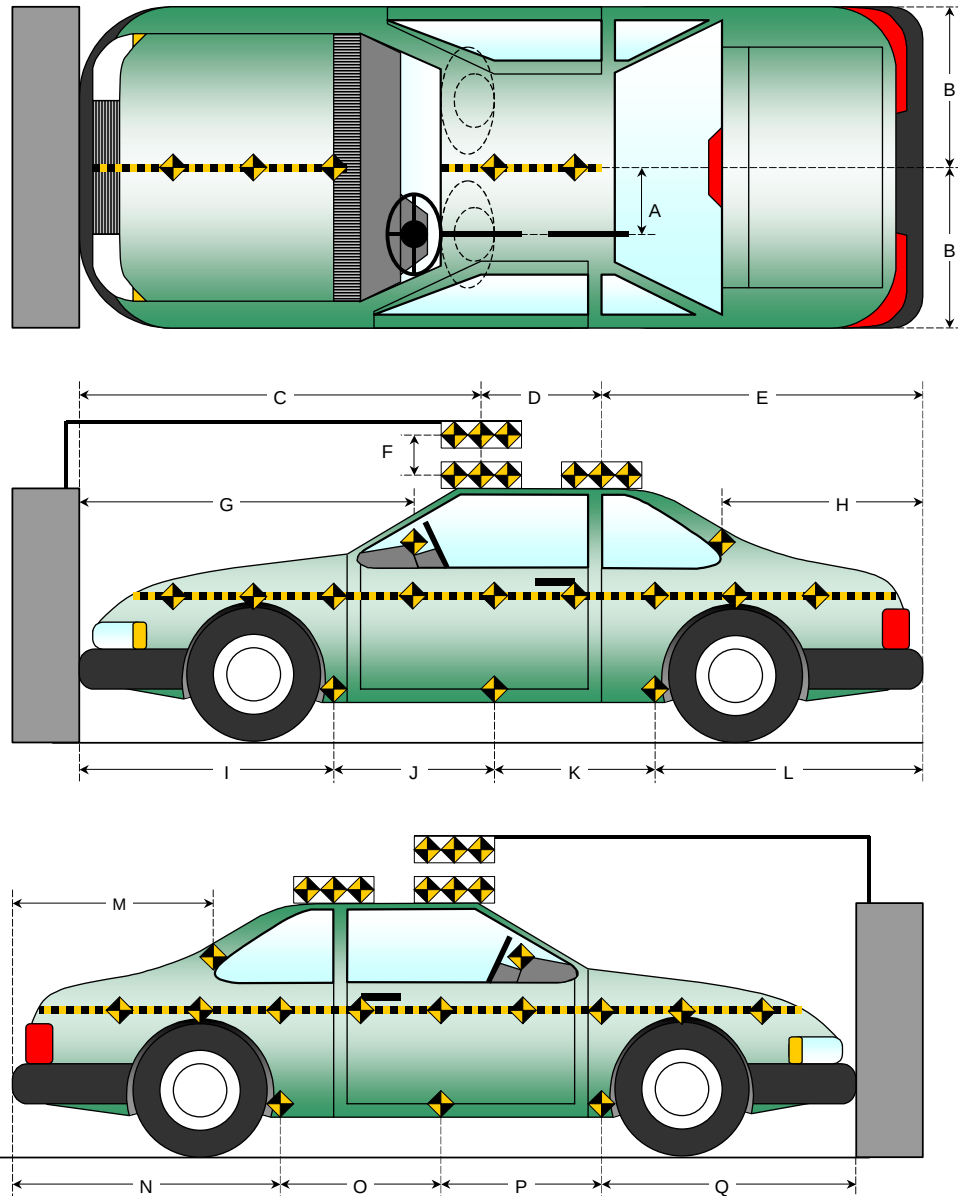

DATA SHEET NO. 17
VEHICLE INTRUSION MEASUREMENTS

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
 Test Program: 2003 NHTSA 35mph NCAP


NHTSA No.: M35602
 Test Date: 2/20/03

DOOR OPENING WIDTH

Item	Description	Units	Pre-Test	Post-Test	Difference
A	Left Side Upper	mm	975	970	-5
B	Left Side Lower	mm	899	898	-1
D	Right Side Upper	mm	974	970	-4
E	Right Side Lower	mm	901	898	-3

WHEELBASE MEASUREMENTS

Item	Description	Units	Pre-Test	Post-Test	Difference
C	Left Side Wheel base	mm	2630	2560	-70
F	Right Side Wheel base	mm	2630	2582	-48

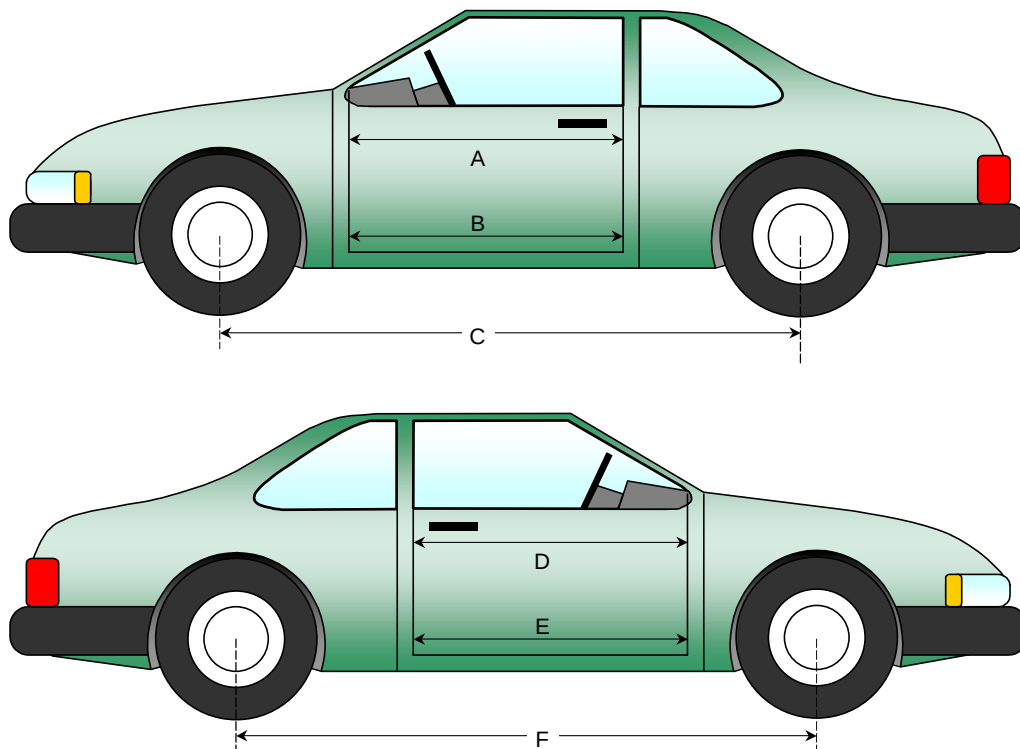

DATA SHEET NO. 17...(CONTINUED)
VEHICLE INTRUSION MEASUREMENTS


Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
 Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
 Test Date: 2/20/03

DRIVER COMPARTMENT INTRUSION

Item	Description	Units	Pre-Test	Post-Test	Difference
AB	Door Opening (Inside window jam)	mm	975	970	-5
CX	Left Knee Bolster to X	mm	276	220	-56
DX	Right Knee Bolster to X	mm	276	216	-60
EX	Brake Pedal to X	mm	590	575	-15
FX	Foot Rest to X	mm	550	535	-15
GX	Center of Steering Wheel Hub to X	mm	65	50	-15


X = Left Front Seat Outboard Anchor Bolt Head

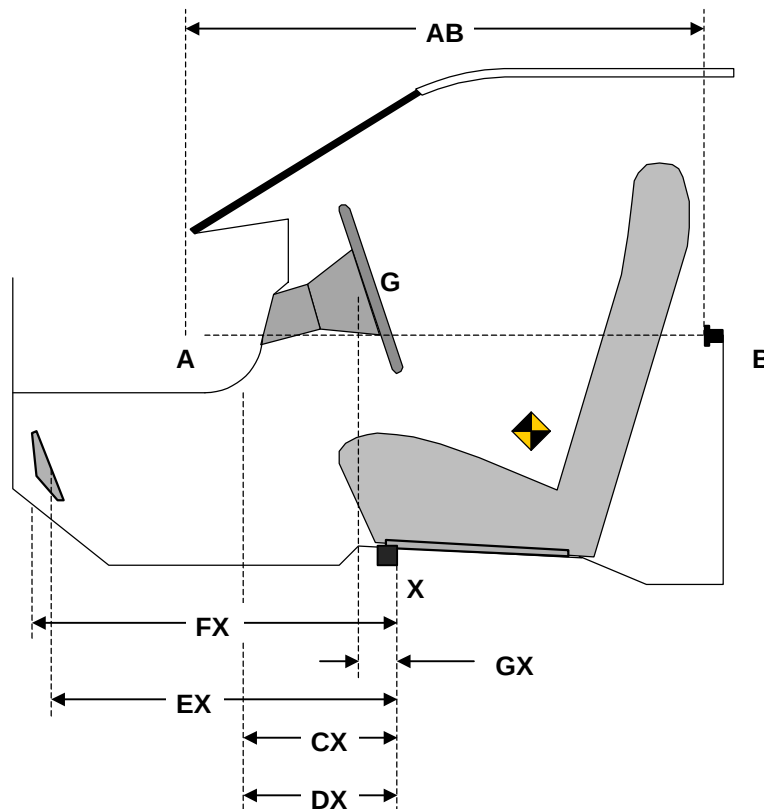

DATA SHEET NO. 17...(CONTINUED)
VEHICLE INTRUSION MEASUREMENTS

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
 Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
 Test Date: 2/20/03

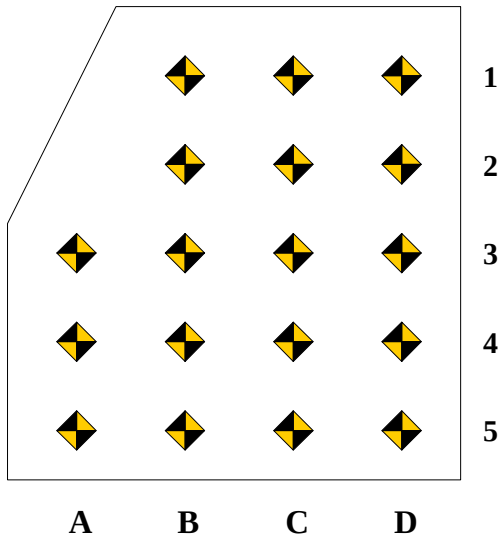

Measurement reference point for X and Z-axis is the forward outboard seat mounting bolt.

Columns A through D are evenly spaced.

Rows 1 and 2 are on the toe kick portion of the floor pan. Rows 3,4 and 5 are located on the most level portion of the floor pan.

Row 3 will be at the intersection of the toe kick and the level sections of the floor pan.

DRIVER FLOOR PAN X-AXIS

	Pre-Test				Post-Test				Difference			
	A	B	C	D	A	B	C	D	A	B	C	D
1		636	634	628		575	575	570		-61	-59	-58
2		536	531	526		490	490	490		-46	-41	-36
3	434	432	429	426	400	390	390	390	-34	-42	-39	-36
4	334	333	327	326	300	295	295	290	-34	-38	-32	-36
5	234	233	227	223	200	200	200	200	-34	-33	-27	-23

DRIVER FLOOR PAN Z-AXIS

	Pre-Test				Post-Test				Difference			
	A	B	C	D	A	B	C	D	A	B	C	D
1		-31	-32	-27		-20	-20	-6		11	12	21
2		-65	-64	-63		-54	-50	-60		11	14	3
3	-67	-66	-65	-64	-62	-55	-55	-48	5	11	10	16
4	-68	-65	-90	-65	-62	-58	-72	-48	6	7	18	17
5	-65	-65	-65	-65	-58	-58	-55	-60	7	7	10	5

DATA SHEET NO. 17...(CONTINUED)
VEHICLE INTRUSION MEASUREMENTS

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
 Test Program: 2003 NHTSA 35mph NCAP


NHTSA No.: M35602
 Test Date: 2/20/03

Measurement reference point for X and Z axis is the forward outboard seat mounting bolt.

Columns A through D are evenly spaced.

Rows 1 and 2 are on the toe kick portion of the floor pan. Rows 3,4, and 5 are located on the most level portion of the floor pan.

Row 3 will be at the intersection of the toe kick and the level sections of the floor pan.

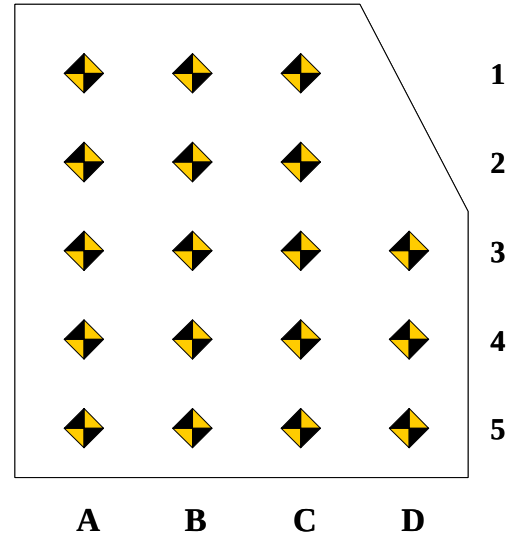

PASSENGER FLOOR PAN X-AXIS

	Pre-Test				Post-Test				Difference			
	A	B	C	D	A	B	C	D	A	B	C	D
1	674	677	676		632	628	620		-42	-49	-56	
2	574	573	576		562	568	560		-12	-5	-16	
3	477	473	476	486	470	468	468	468	-7	-5	-8	-18
4	372	373	376	386	370	368	368	368	-2	-5	-8	-18
5	272	273	276	286	270	268	268	268	-2	-5	-8	-18

PASSENGER FLOOR PAN Z-AXIS


	Pre-Test				Post-Test				Difference			
	A	B	C	D	A	B	C	D	A	B	C	D
1	-2	-12	-5		-5	0	-1		-3	12	4	
2	-50	-57	-62		-56	-50	-50		-6	7	12	
3	-69	-70	-70	-70	-68	-80	-70	-65	1	-10	0	5
4	-64	-70	-70	-69	-65	-72	-68	-65	-1	-2	2	4
5	-72	-67	-66	-66	-65	-65	-70	-72	7	2	-4	-6

DATA SHEET NO. 18
FIXED BARRIER LOAD CELL LOCATIONS

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
 Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
 Test Date: 2/20/03

36 Load Cell Rigid Barrier (NHTSA Standard)
Load Cell Locations on Fixed Barrier

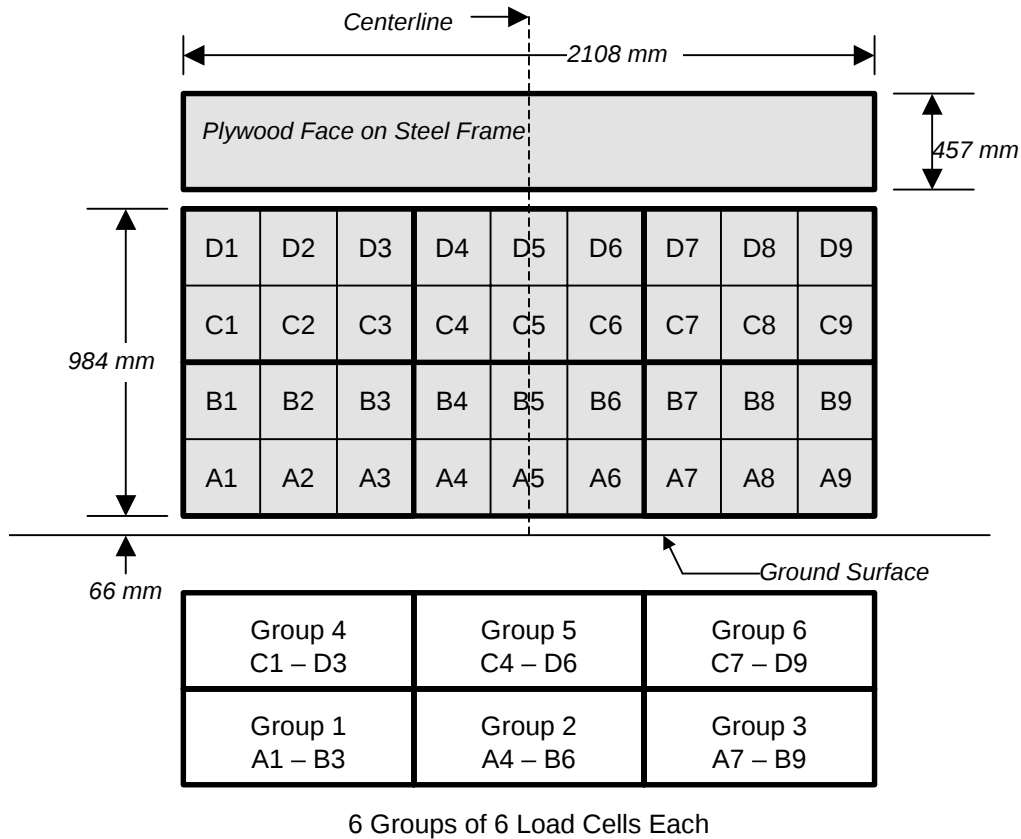

The Data is presented in Appendix C with the following requirements:

- 1.) Data from 36 individual load cells
- 2.) Sum data from 6 groupings shown above (6 cells/group)
- 3.) Total or sum of all 36 individual load cells
- 4.) Sum of all 36 individual load cells vs. vehicle dynamic crush

DATA SHEET NO. 19
ACCIDENT INVESTIGATION DIVISION DATA

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
 Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
 Test Date: 2/20/03

VEHICLE INFORMATION

VIN: JA4LX31G33U051327
 Vehicle Size Category: 4 Door

Wheel base (mm): 2630
 Test Weight (kg): 1652

ACCELEROMETER DATA

Accelerometer Location: Left rear floor pan
 Cal. Procedure/Interval: 6 months / drop test
 Integration Algorithm: NHTSA Standard
 Impact Velocity (km/h): 56.31
 Velocity Change (km/h): 70.8


Linearity: Good

Time of Separation (msec): 61.7

CRUSH PROFILE

Collision Deformation Classification: 12FDEW6 Midpoint of Damage: Vehicle Centerline
 Damage Region Length (mm): 1383 Impact Mode: Full Frontal


No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
C1	Crush zone 1 at left side	mm	220	445	-225
C2	Crush zone 2 on left side	mm	65	430	-365
C3	Crush zone 3 on left side	mm	20	422	-402
C4	Crush zone 4 on right side	mm	20	445	-425
C5	Crush zone 5 on right side	mm	65	485	-420
C6	Crush zone 6 at right side	mm	220	464	-244

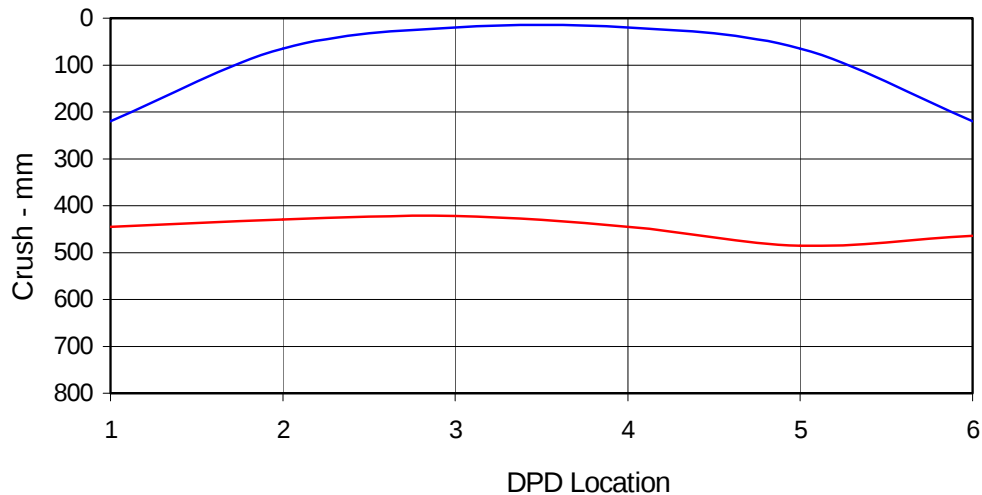

DATA SHEET NO. 20
DUMMY/VEHICLE TEMPERATURE STABILIZATION

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
Test Date: 2/20/03

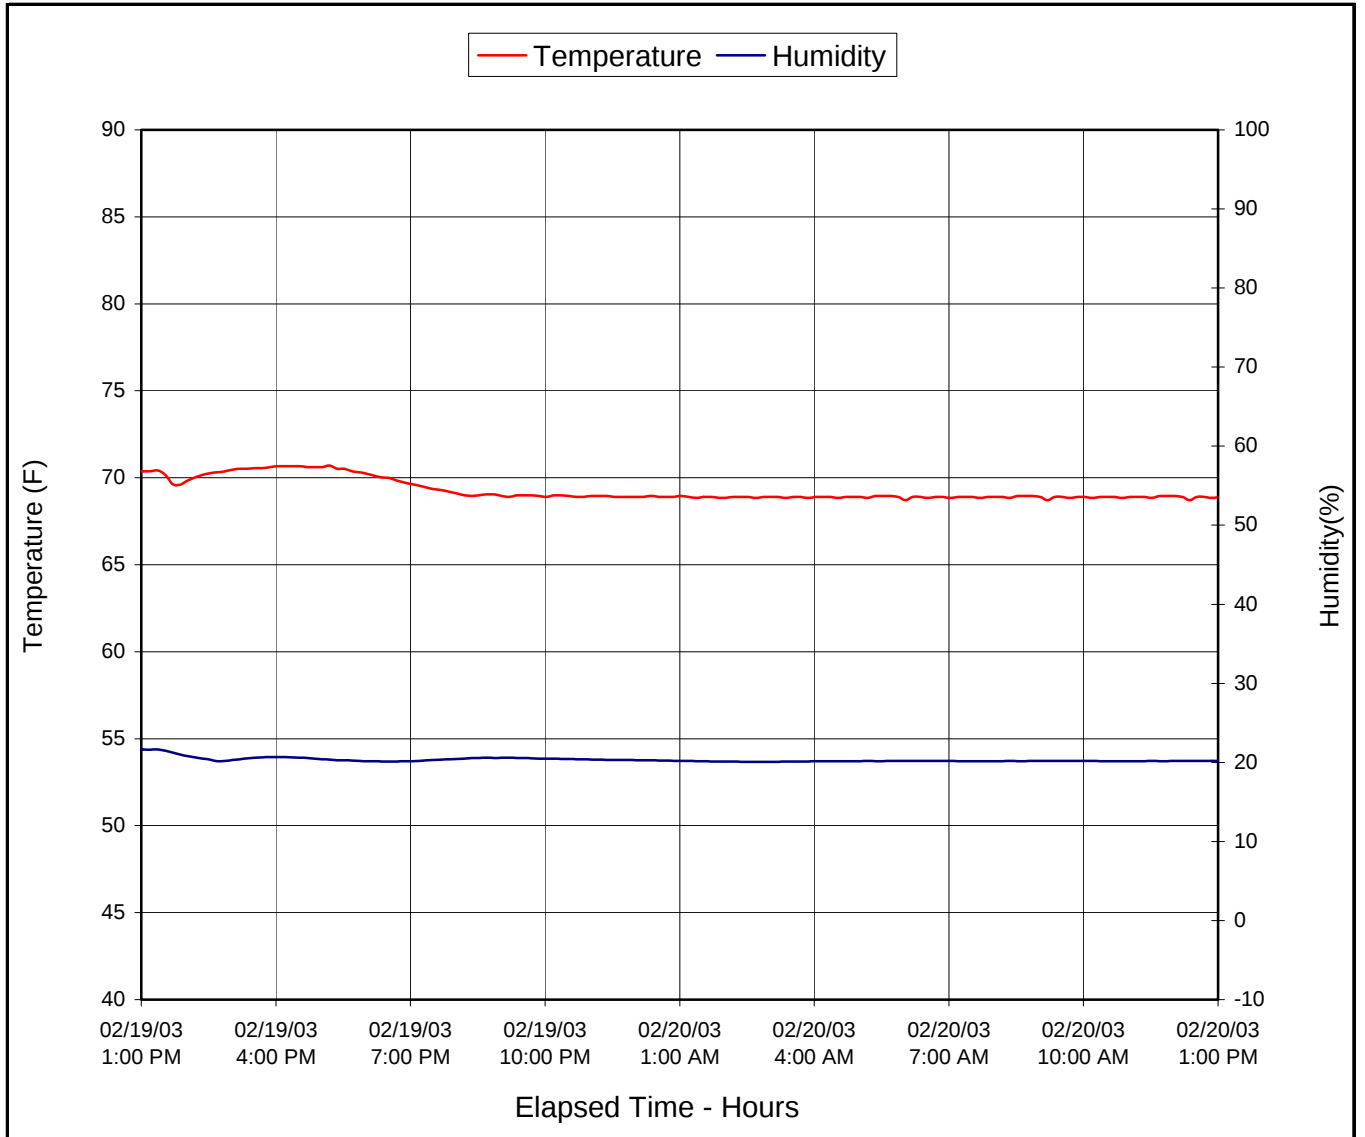

APPENDIX A

PHOTOGRAPHS

LIST OF PHOTOGRAPHS

Figure		Page
A-1	Load Cell Location	A-1
A-2	Vehicle Certification Label	A-2
A-3	Vehicle Tire Label	A-3
A-4	Right Front $\frac{3}{4}$ View, As Received	A-4
A-5	Left Rear $\frac{3}{4}$ View, As Received	A-5
A-6	Pre-Test Front View	A-6
A-7	Post-Test Front View	A-7
A-8	Pre-Test Left Side View	A-8
A-9	Post-Test Left Side View	A-9
A-10	Pre-Test Right Side View	A-10
A-11	Post-Test Right Side View	A-11
A-12	Pre-Test Right Front $\frac{3}{4}$ View	A-12
A-13	Post-Test Right Front $\frac{3}{4}$ View	A-13
A-14	Pre-Test Left Rear $\frac{3}{4}$ View	A-14
A-15	Post-Test Left Rear $\frac{3}{4}$ View	A-15
A-16	Left Rear $\frac{3}{4}$ View of Doors After Impact	A-16
A-17	Right Rear $\frac{3}{4}$ View of Doors After Impact	A-17
A-18	Pre-Test Windshield View	A-18
A-19	Post-Test Windshield View	A-19
A-20	Pre-Test Engine Compartment	A-20
A-21	Post-Test Engine Compartment	A-21
A-22	Pre-Test Fuel Cap	A-22
A-23	Post-Test Fuel Cap	A-23
A-24	Pre-Test Front Underbody View	A-24
A-25	Post-Test Front Underbody View	A-25
A-26	Pre-Test Mid Underbody View	A-26
A-27	Post-Test Mid Underbody View	A-27
A-28	Pre-Test Rear Underbody View	A-28
A-29	Post-Test Rear Underbody View	A-29
A-30	Pre-Test Driver Dummy Front View (Head Position)	A-30
A-31	Post-Test Driver Dummy Front View (Head Position)	A-31
A-32	Pre-Test Driver Dummy Front Through Window	A-32
A-33	Post-Test Driver Dummy Front Through Window	A-33
A-34	Pre-Test Driver Dummy Door Open	A-34
A-35	Post-Test Driver Dummy Door Open	A-35

LIST OF PHOTOGRAPHS...(Continued)

Figure		Page
A-36	Pre-Test Driver Dummy Feet	A-36
A-37	Post-Test Driver Dummy Feet	A-37
A-38	Pre-Test Driver Side Knee Bolster	A-38
A-39	Post-Test Driver Side Knee Bolster	A-39
A-40	Pre-Test Driver Side Floor Pan	A-40
A-41	Post-Test Driver Side Floor Pan	A-41
A-42	Post-Test Driver Dummy Head	A-42
A-43	Post-Test Driver Dummy Contact to Air Bag	A-43
A-44	Pre-Test Passenger Dummy Front View (Head Position)	A-44
A-45	Post-Test Passenger Dummy Front View (Head Position)	A-45
A-46	Pre-Test Passenger Dummy Front Through Window	A-46
A-47	Post-Test Passenger Dummy Front Through Window	A-47
A-48	Pre-Test Passenger Dummy Door Open	A-48
A-49	Post-Test Passenger Dummy Door Open	A-49
A-50	Pre-Test Passenger Dummy Feet	A-50
A-51	Post-Test Passenger Dummy Feet	A-51
A-52	Pre-Test Passenger Side Floor Pan	A-52
A-53	Post-Test Passenger Side Floor Pan	A-53
A-54	Pre-Test Passenger Side Knee Bolster	A-54
A-55	Post-Test Passenger Side Knee Bolster	A-55
A-56	Post-Test Passenger Dummy Head	A-56
A-57	Post-Test Passenger Dummy Contact to Air Bag	A-57
A-58	Vehicle on Rollover Device	A-58
A-59	Vehicle During Impact	A-59

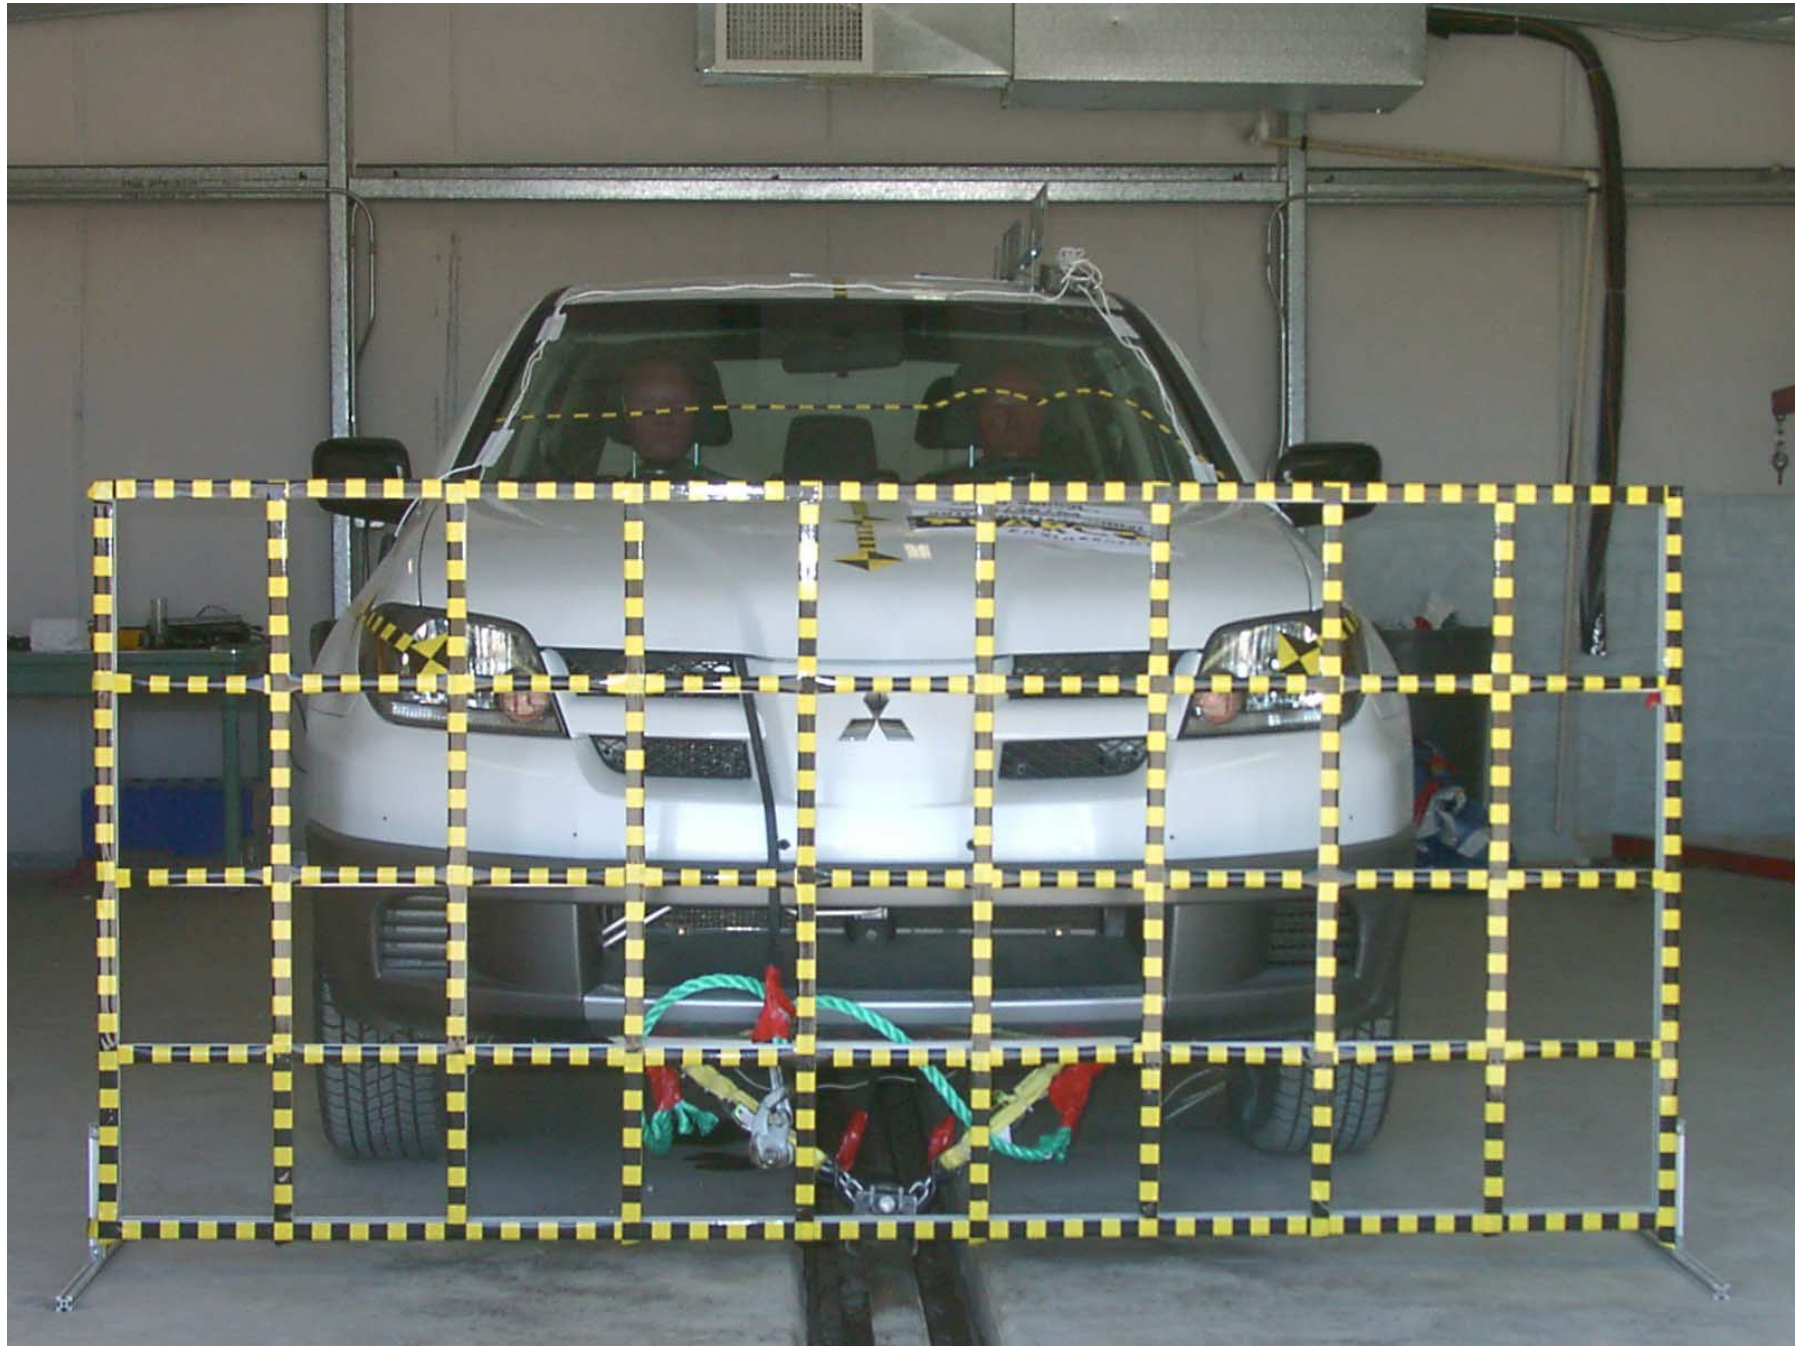


Figure A-1: Load Cell Location

MFD. BY MITSUBISHI MOTORS CORPORATION

GVWR 4145LBS/1880KG

GAWR 2315LBS/1050KG WITH P225/60R16

FR 16X6JJ RIMS AT 200KPa/29PSI

GAWR 2348LBS/1065KG WITH P225/60R16

RR 16X6JJ RIMS AT 200KPa/29PSI

JAPAN
OCT. 2002

TIRES
COLD.

TIRES
COLD.

THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY AND THEFT
PREVENTION STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.



JA4LX31G33U051327

VEHICLE TYPE: MPV

MU000414

Figure A-2: Vehicle Certification Label



**TIRE INFLATION PRESSURE
(CHECK WITH TIRE COOL)**

STANDARD INFLATION PRESSURE
FOR ALL LOAD.

1ST SEAT : 2 PASSENGERS

2ND SEAT : 3 PASSENGERS

TOTAL : 5 PASSENGERS

LUGGAGE : 35kg (77lbs)

TOTAL WEIGHT : 375kg (827lbs)

TIRE SIZE	FRONT & REAR
P225/60R16	29PSI {200kPa}

TEMPORARY TIRE SIZE

T135/90D16
60PSI {420kPa}

MR961383 F

Figure A-3: Vehicle Tire Label



Figure A-4: Right Front $\frac{3}{4}$ View, As Received



Figure A-5: Left Rear $\frac{3}{4}$ View, as Received



Figure A-6: Pre-Test Front View



Figure A-7: Post-Test Front View (Vehicle Moved)



Figure A-8: Pre-Test Left Side View



Figure A-9: Post-Test Left Side View



Figure A-10: Pre-Test Right Side View



Figure A-11: Post-Test Right Side View



Figure A-12: Pre-Test Right Front $\frac{3}{4}$ View



Figure A-13: Post-Test Right Front $\frac{3}{4}$ View (Vehicle Moved)



Figure A-14: Pre-Test Left Rear $\frac{3}{4}$ View



Figure A-15: Post-Test Left Rear $\frac{3}{4}$ View



Figure A-16: Left Rear $\frac{3}{4}$ View of Doors After Impact



Figure A-17: Right Rear 3/4 View of Doors After Impact

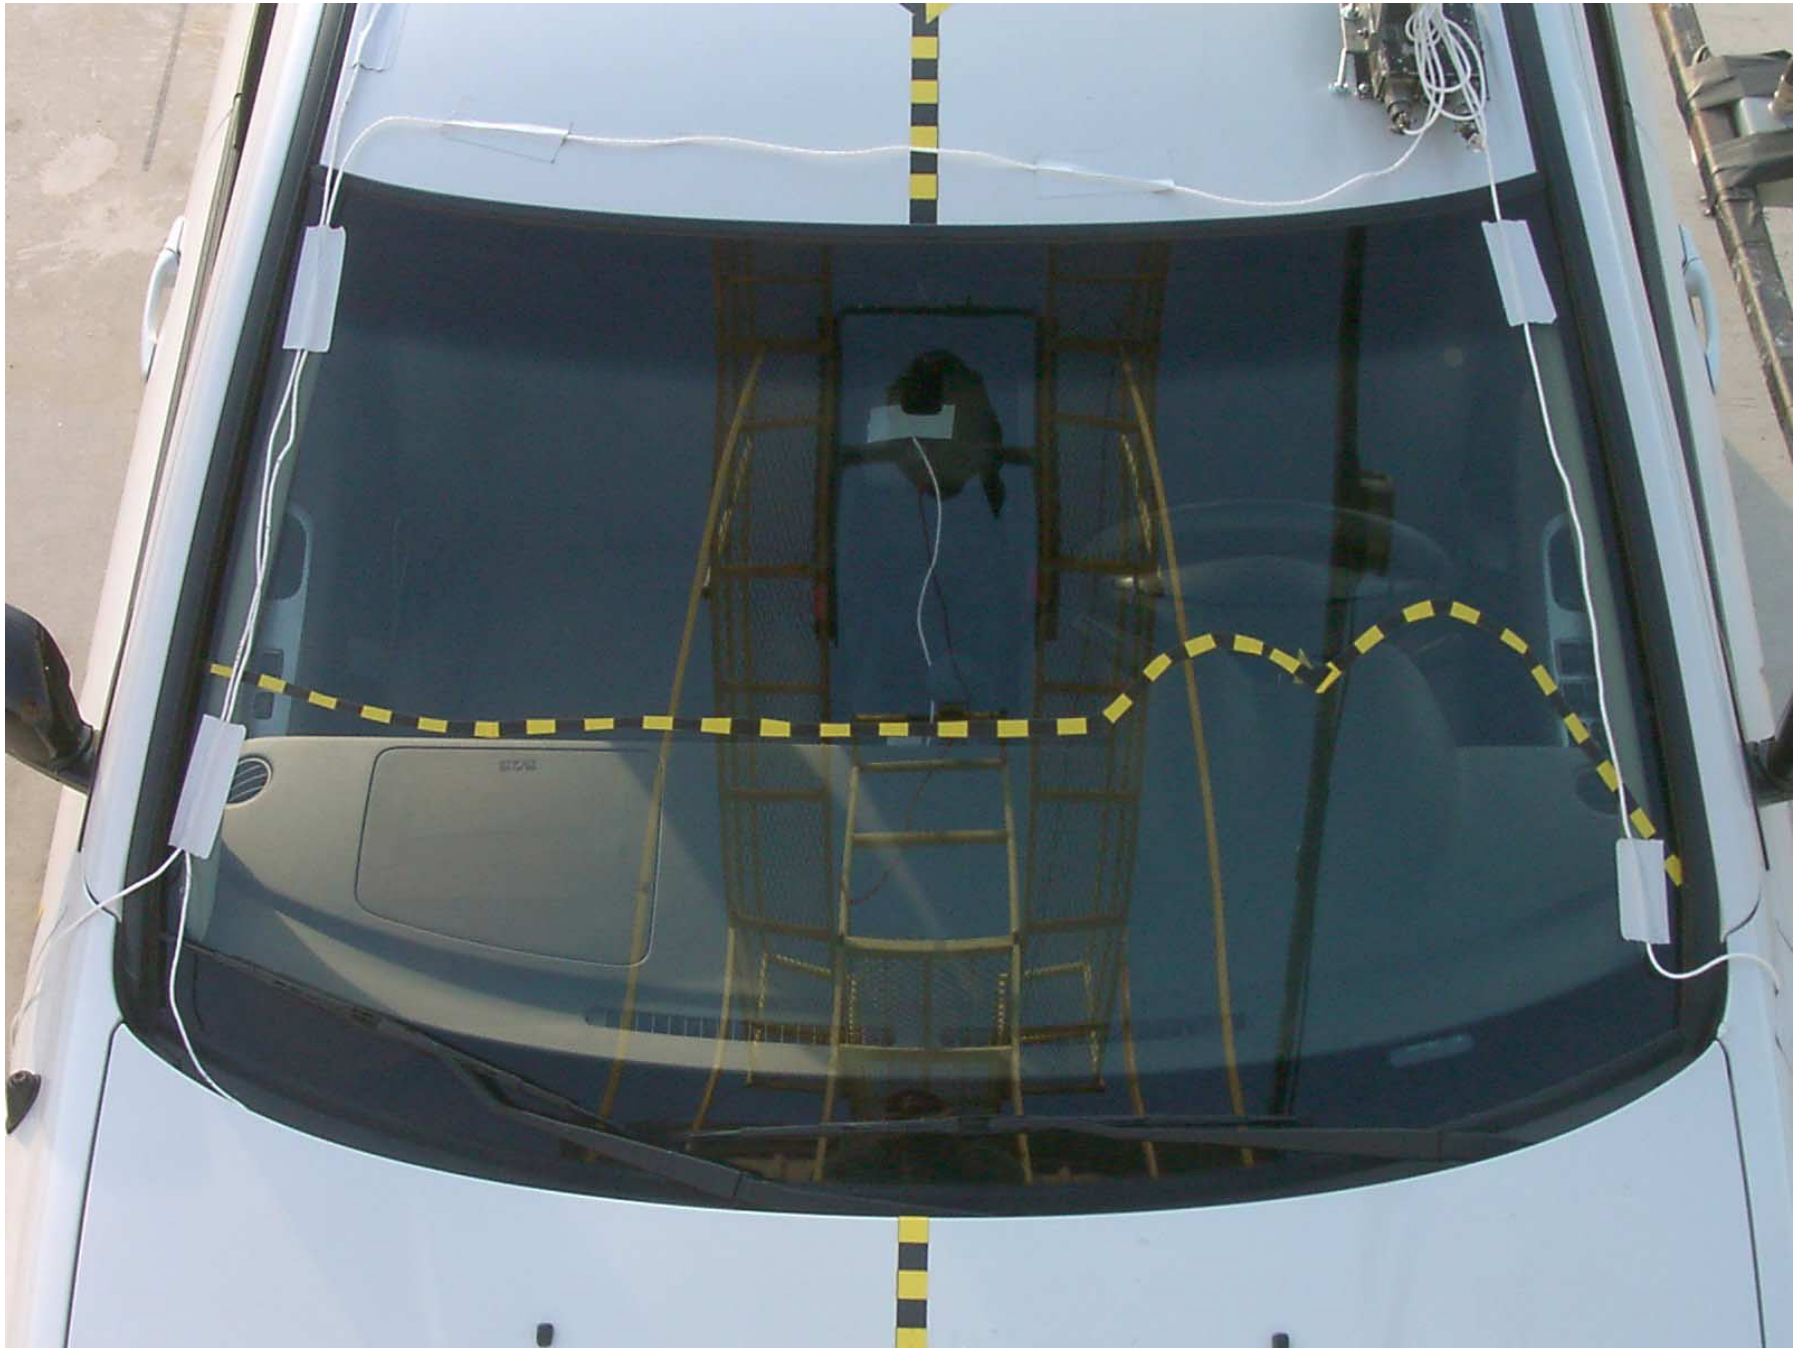


Figure A-18: Pre-Test Windshield View

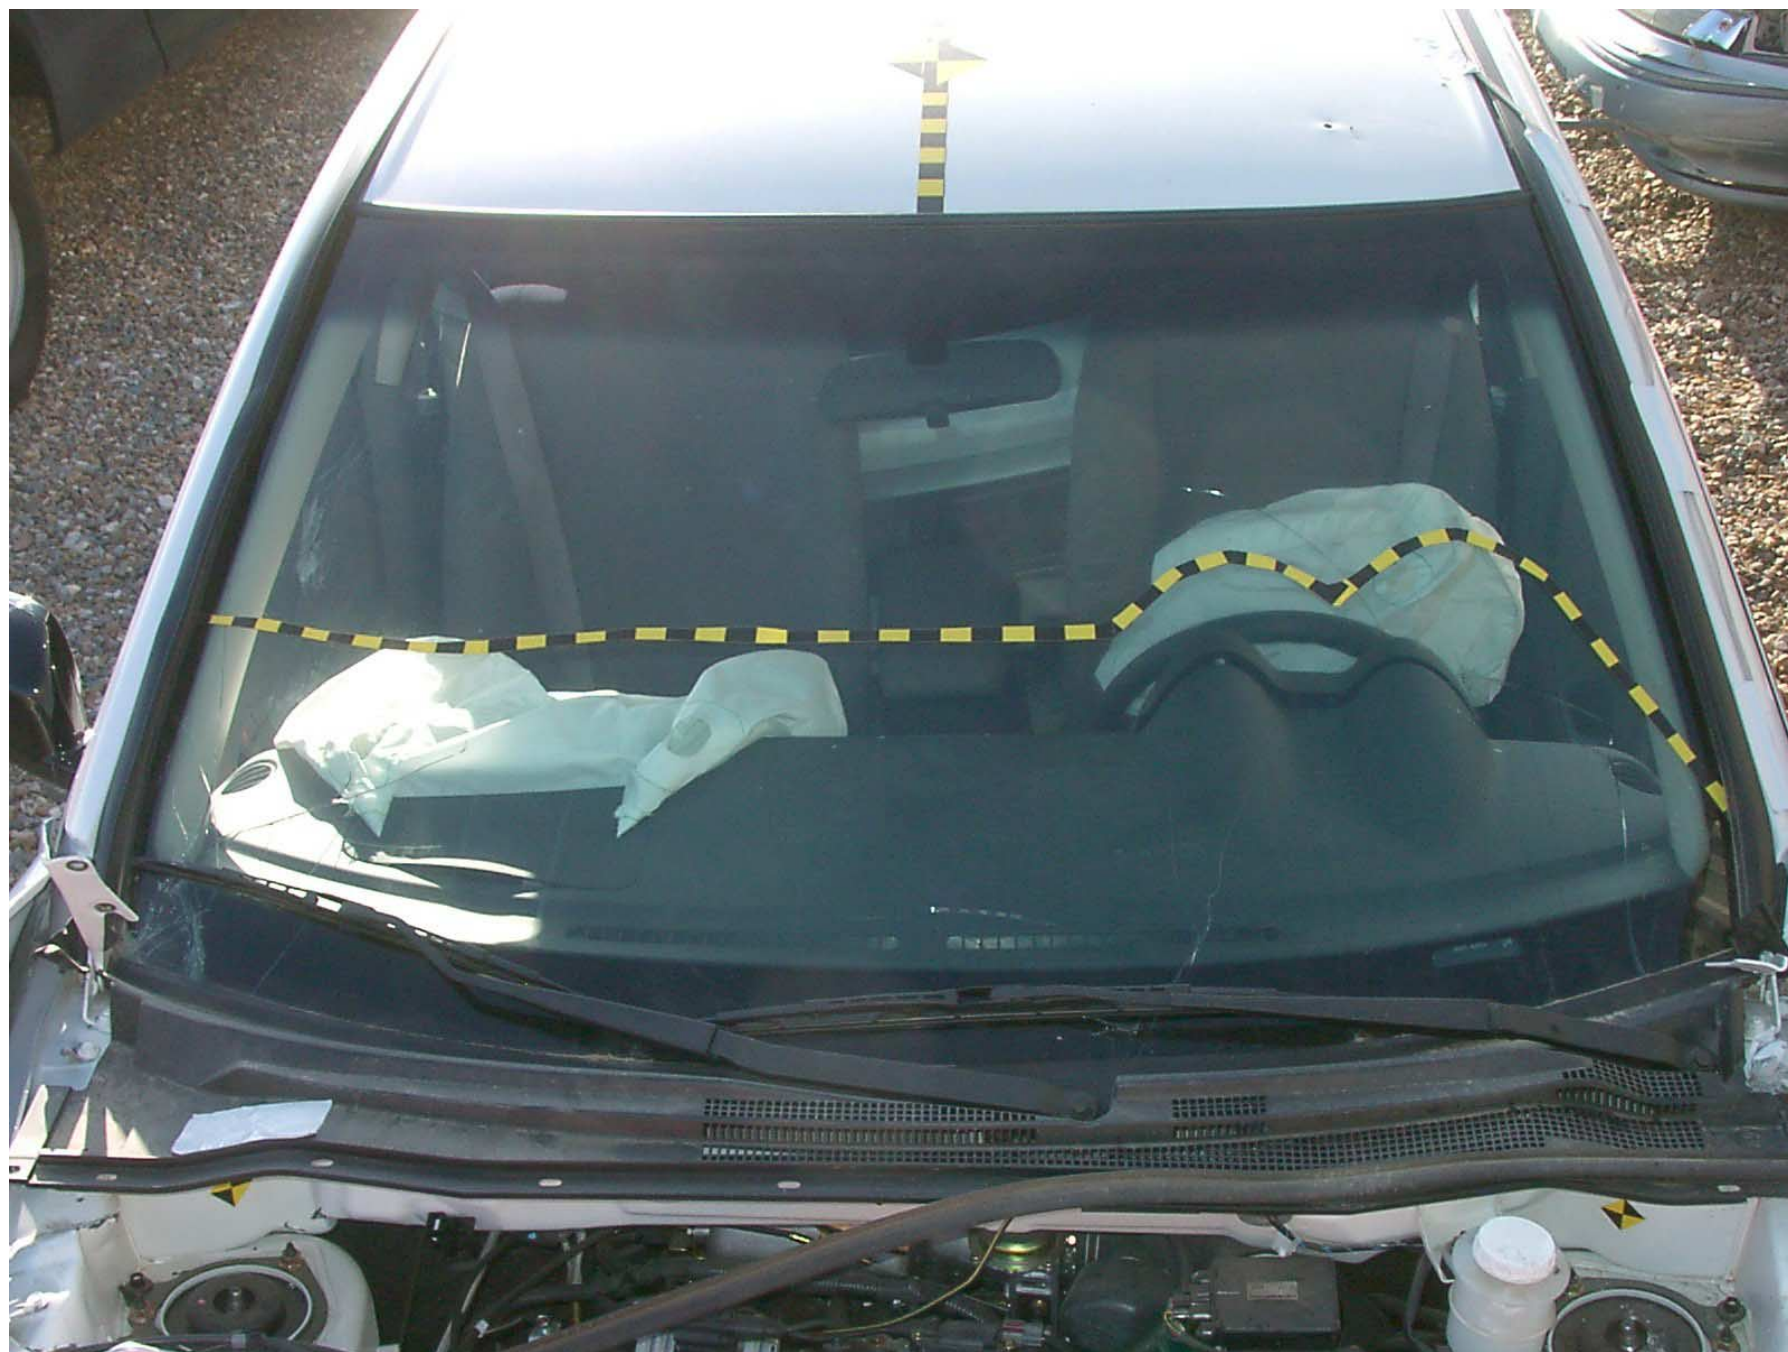


Figure A-19: Post-Test Windshield View



Figure A-20: Pre-Test Engine Compartment

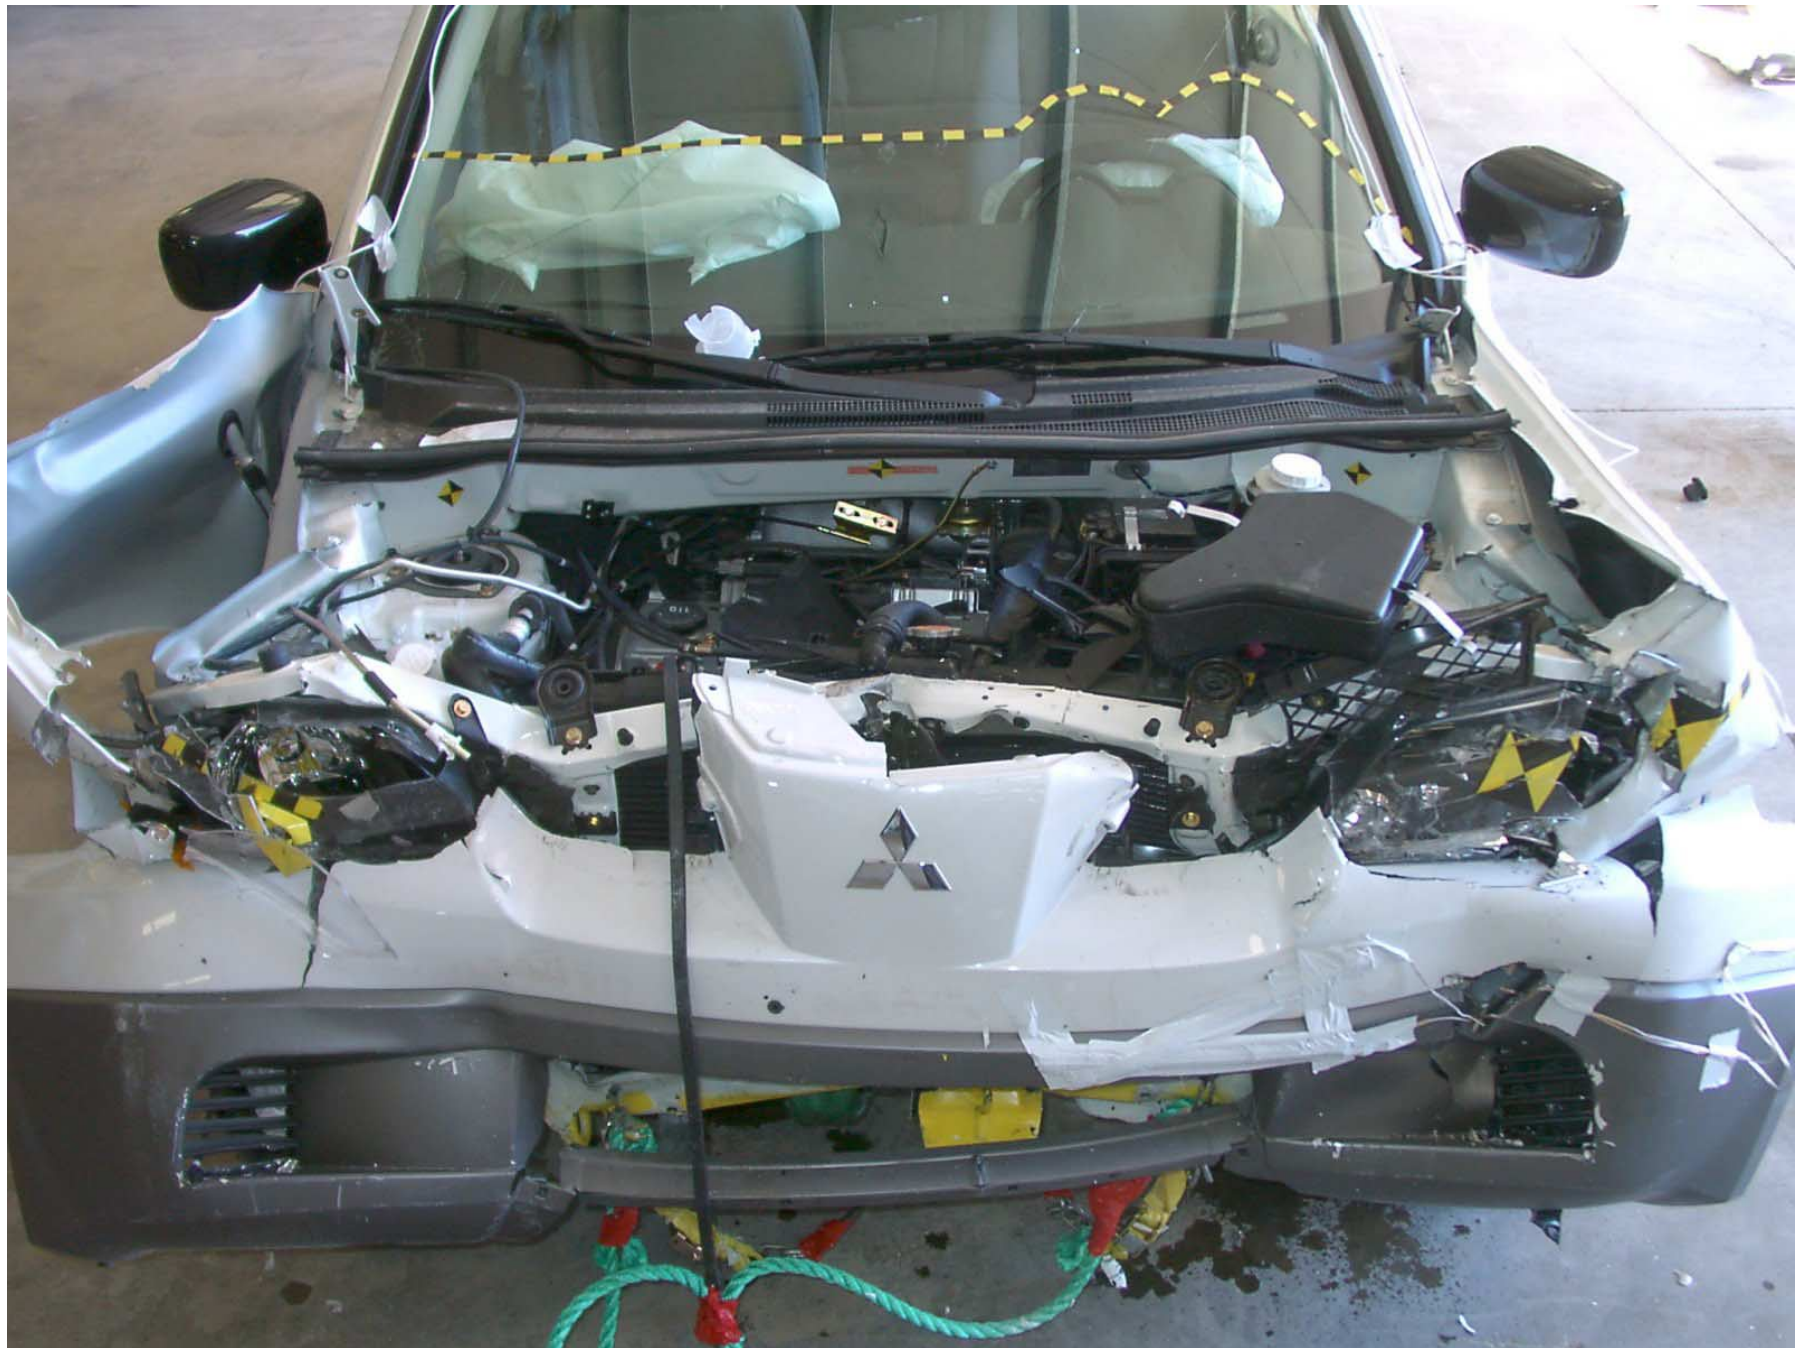


Figure A-21: Post-Test Engine Compartment



Figure A-22: Pre-Test Fuel Cap

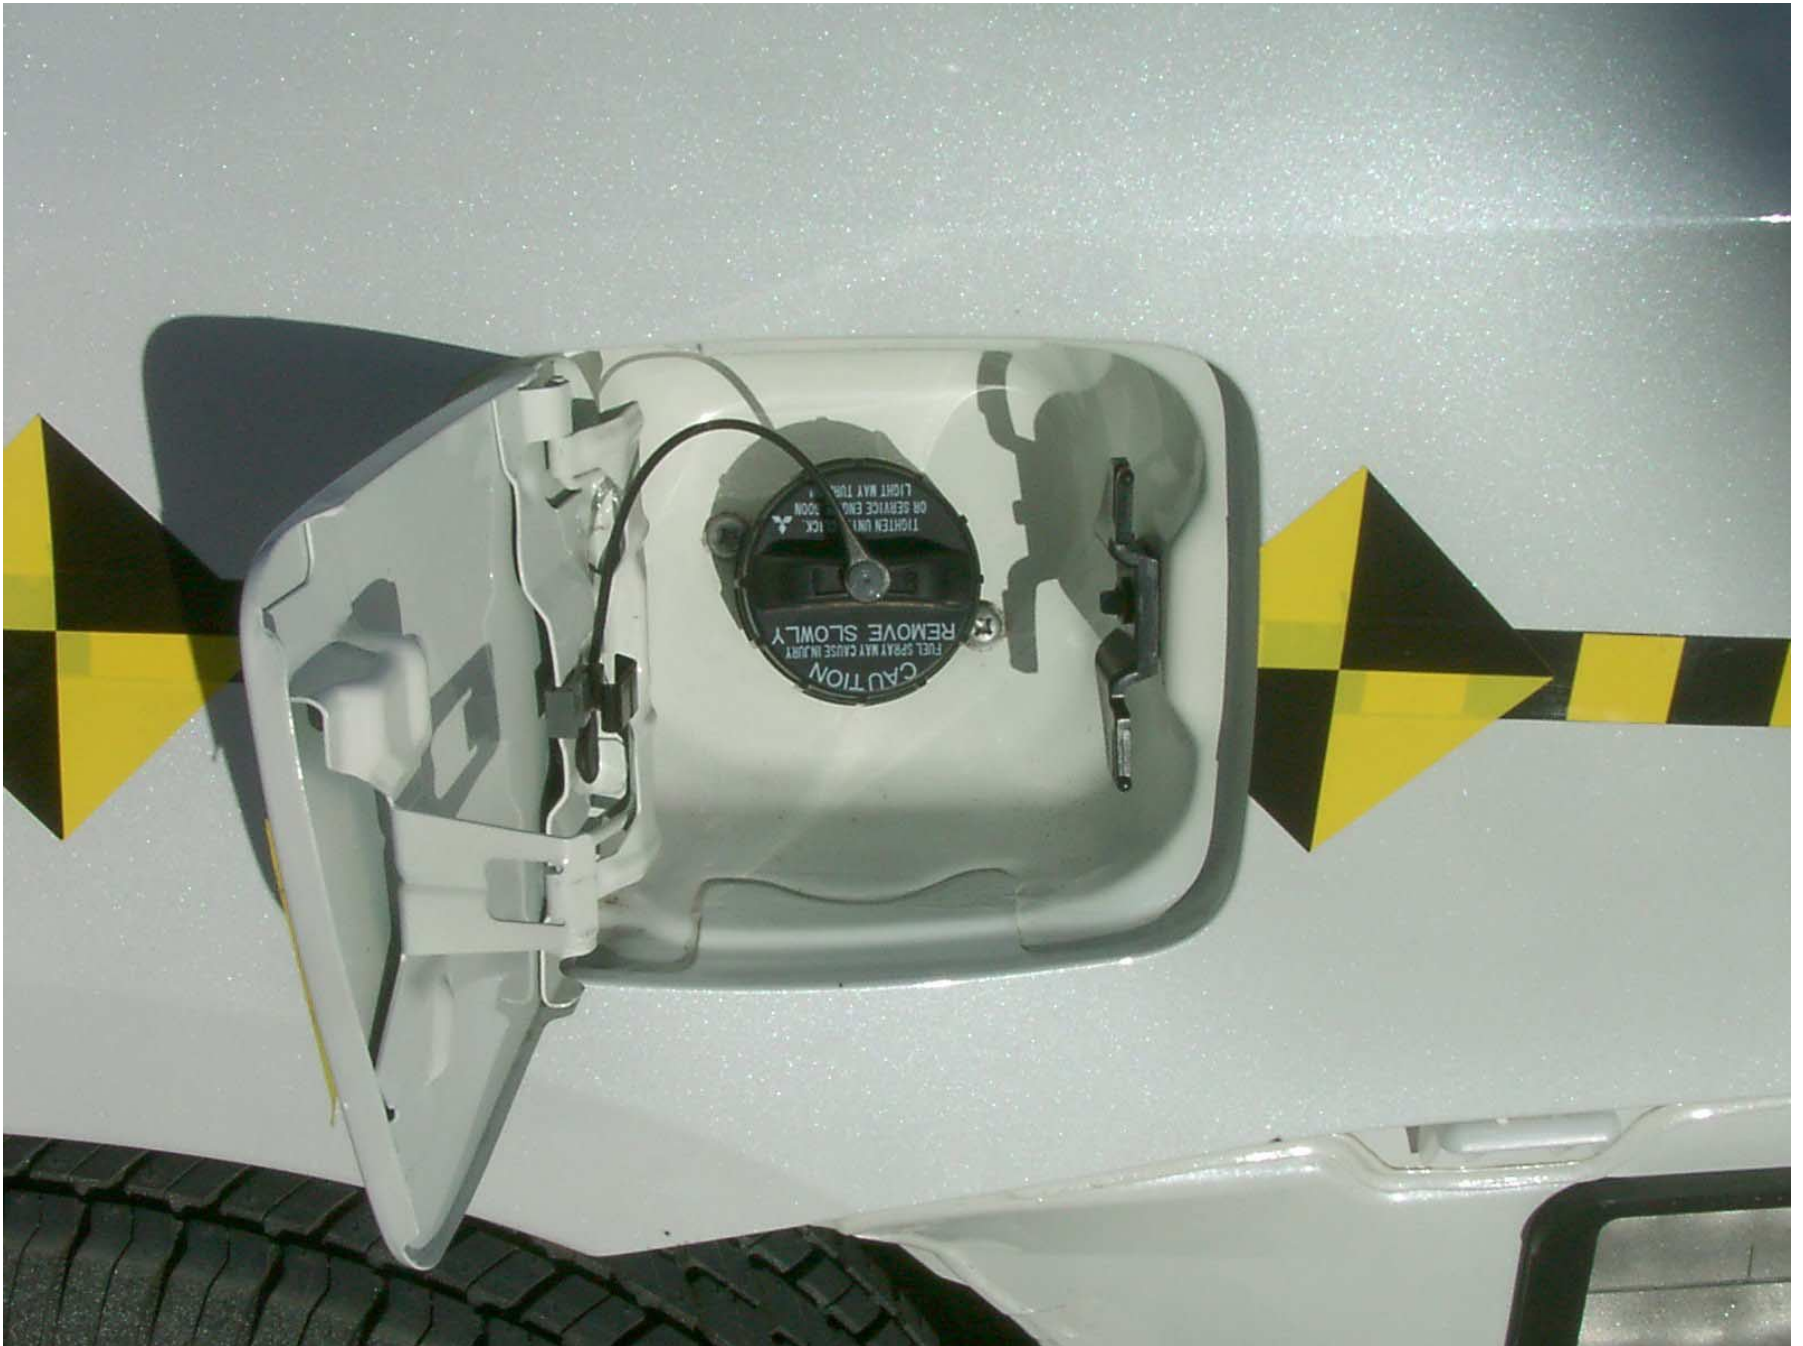


Figure A-23: Post-Test Fuel Cap

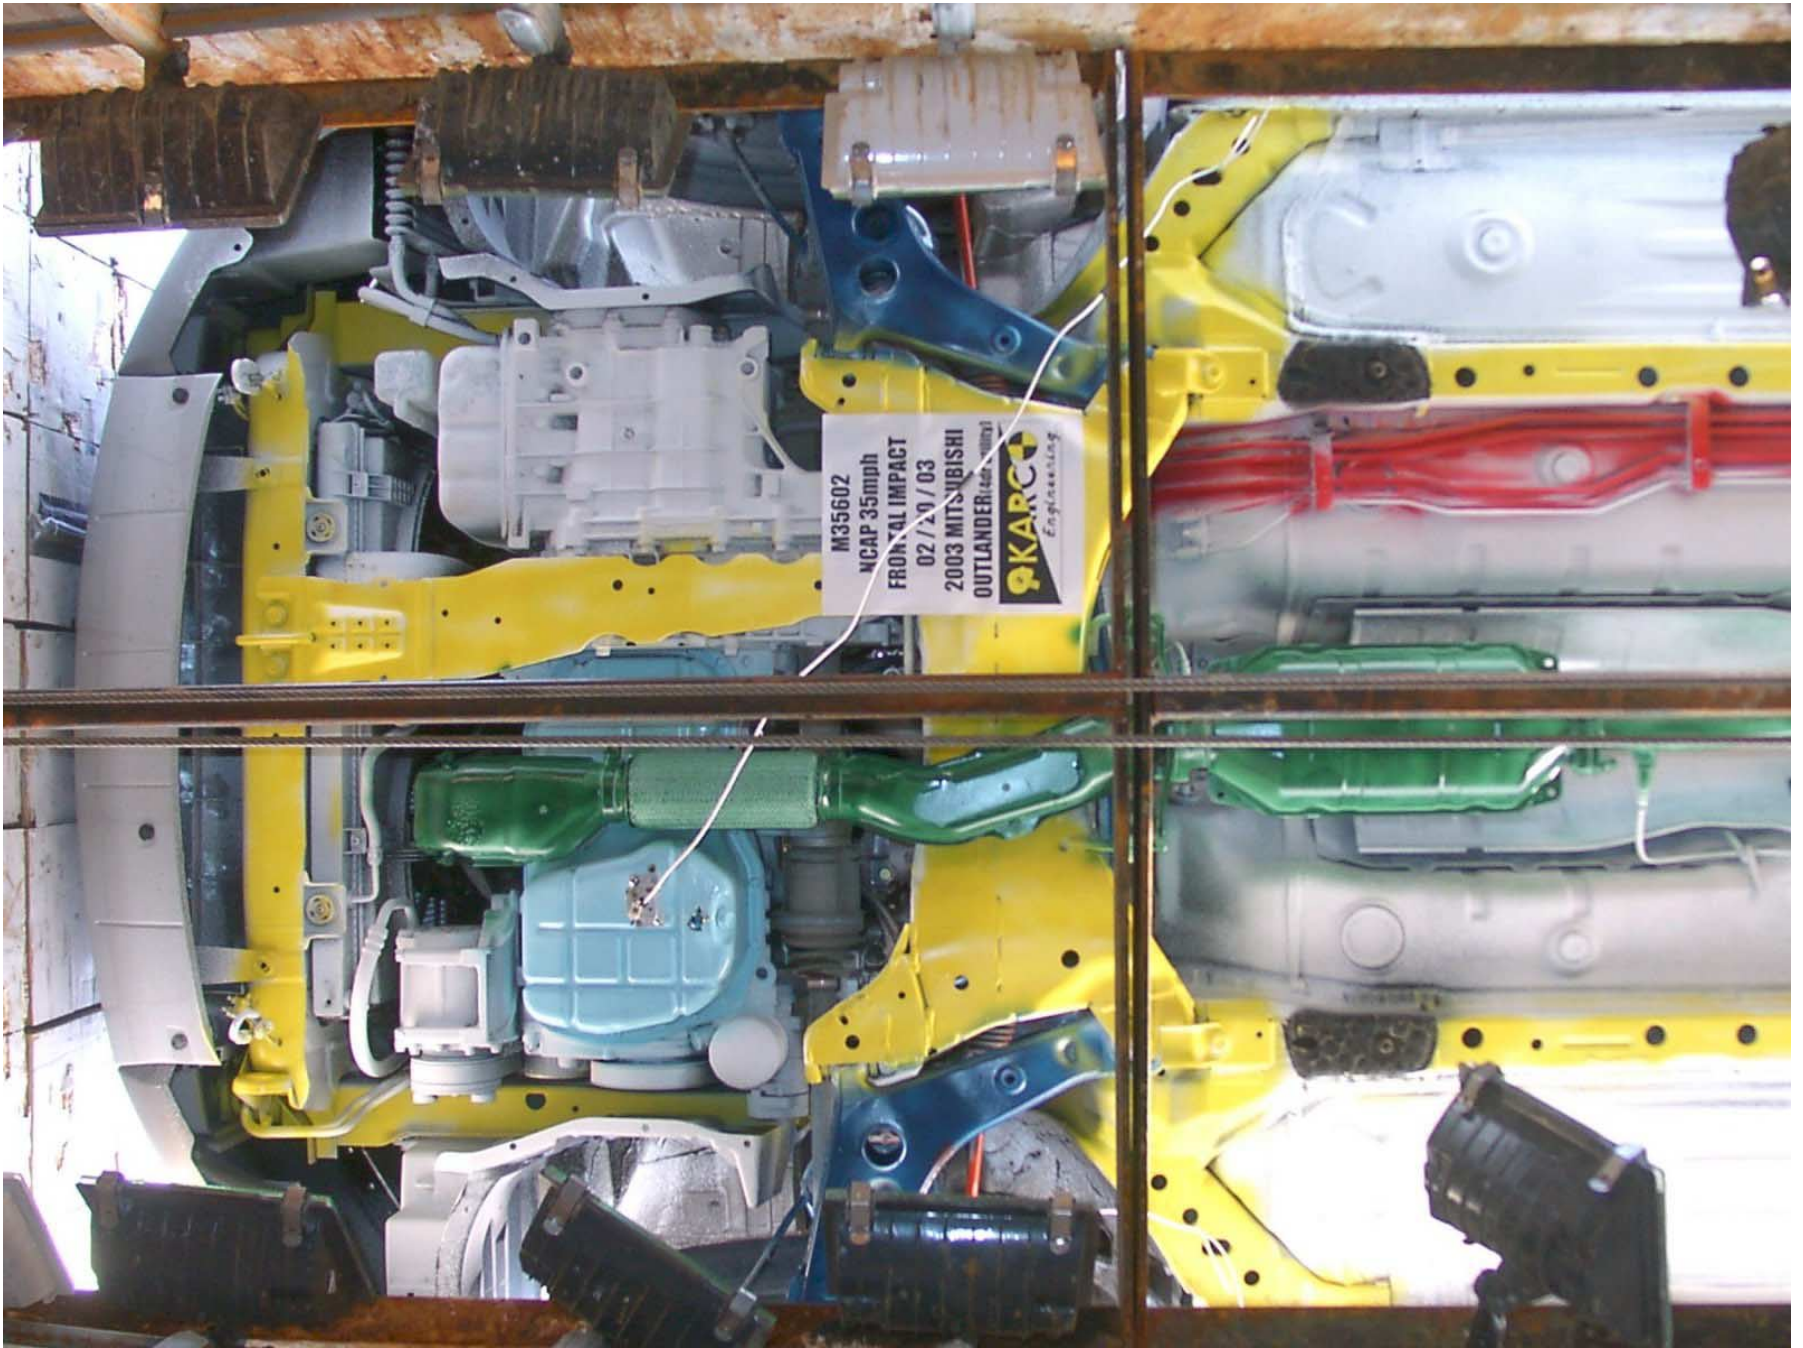


Figure A-24: Pre-Test Front Underbody View

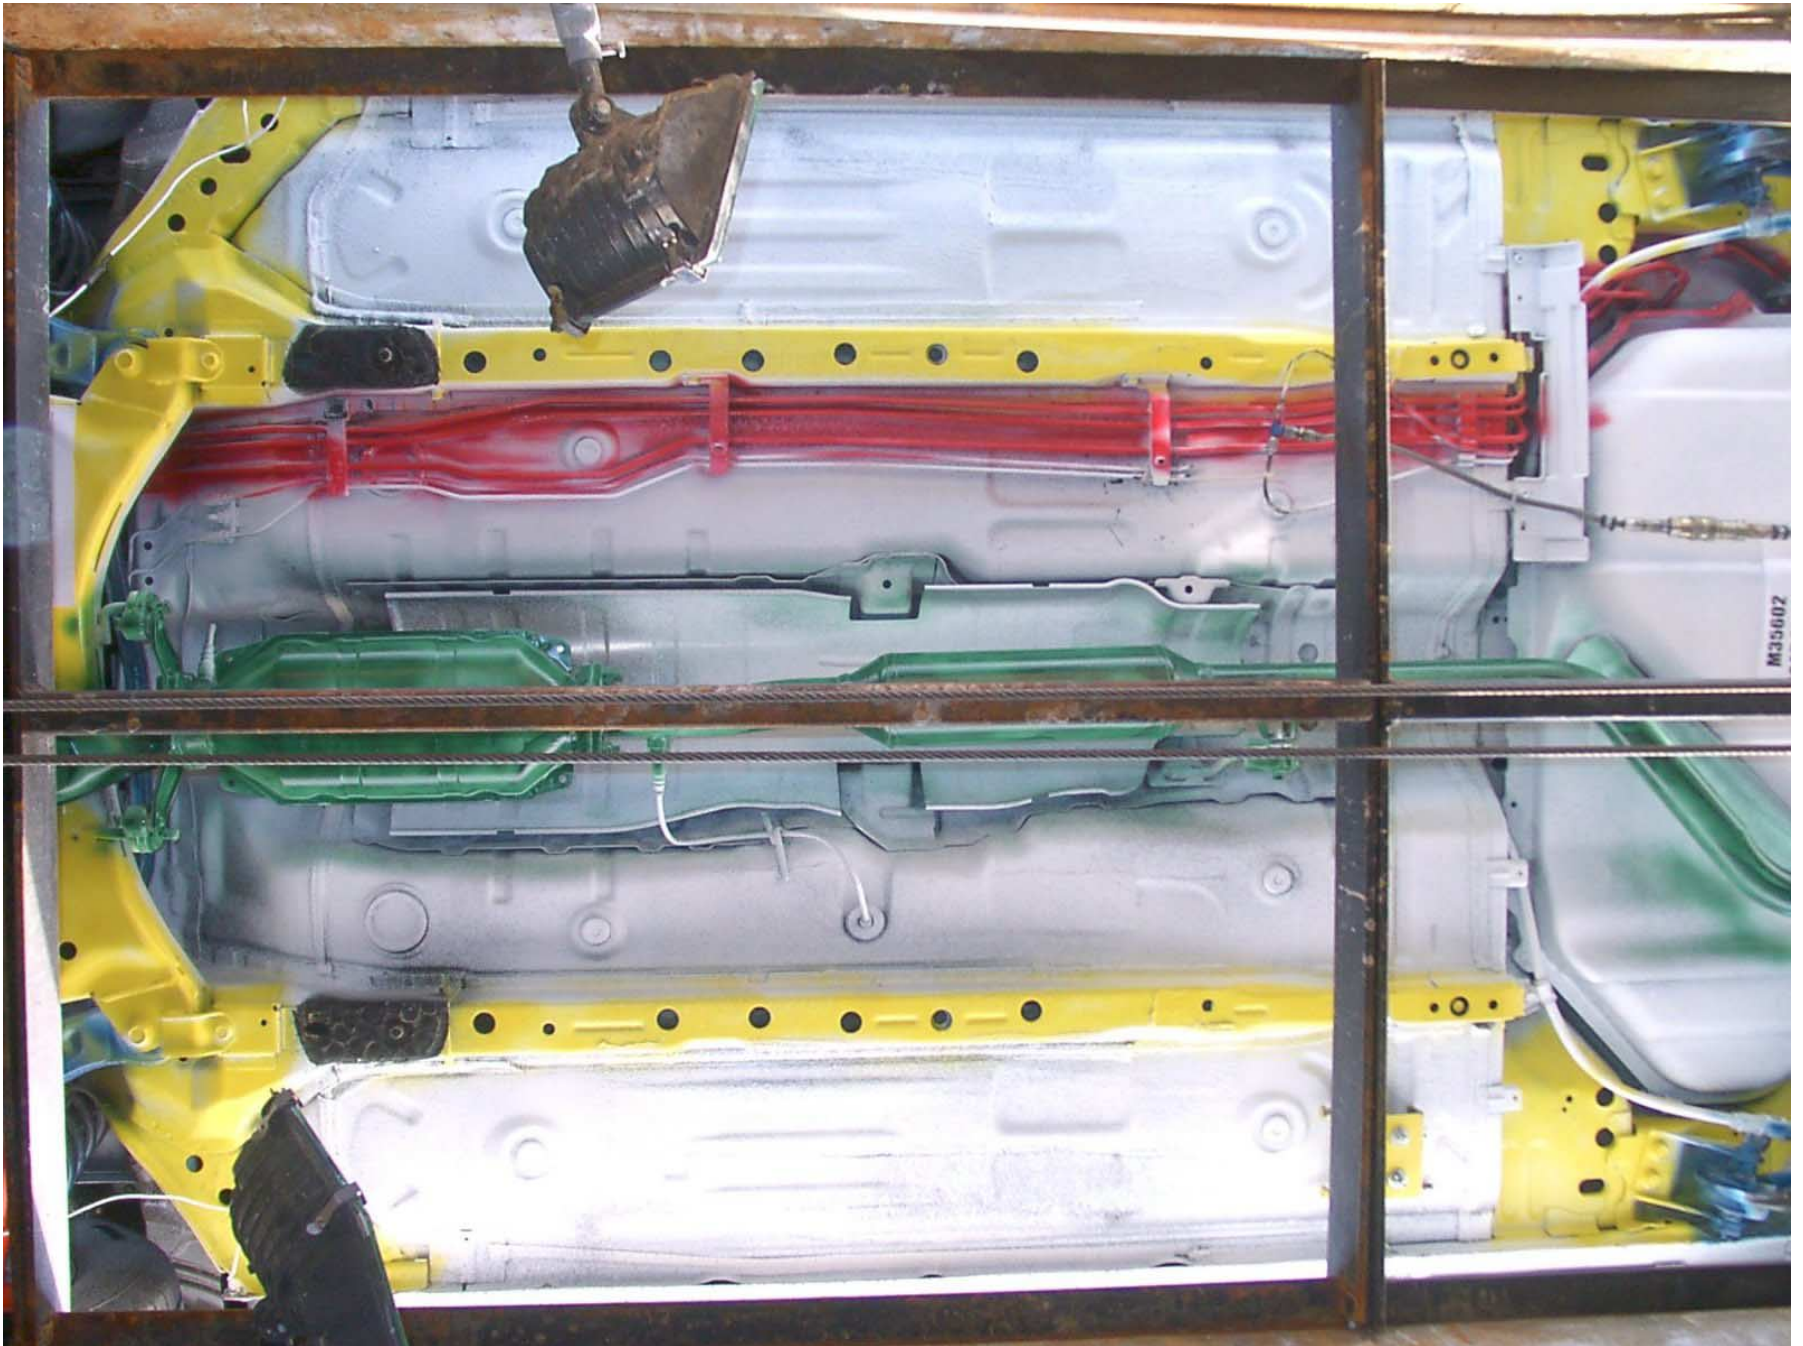


Figure A-26: Pre-Test Mid Underbody View

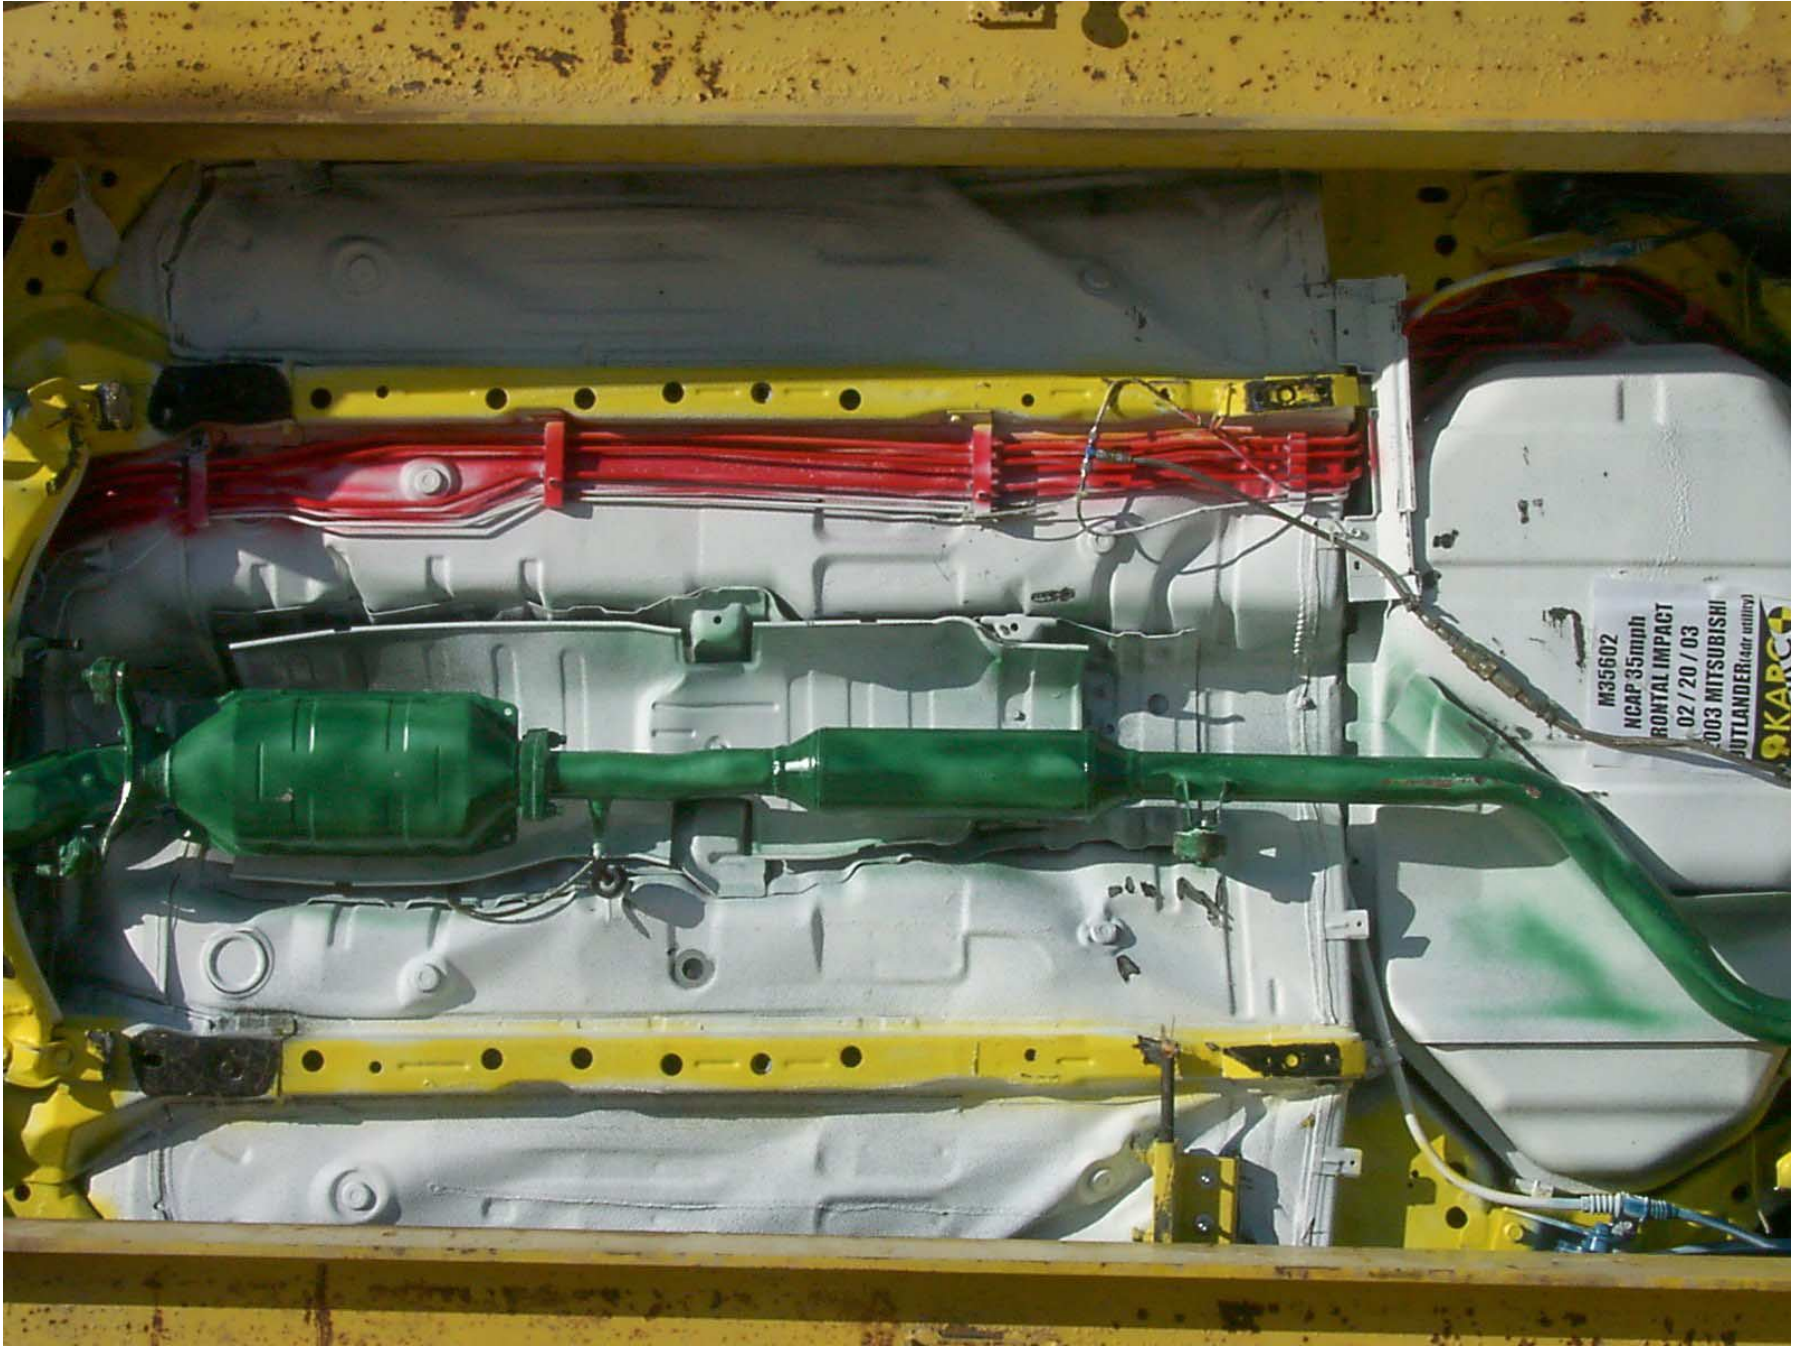


Figure A-27: Post-Test Mid Underbody View

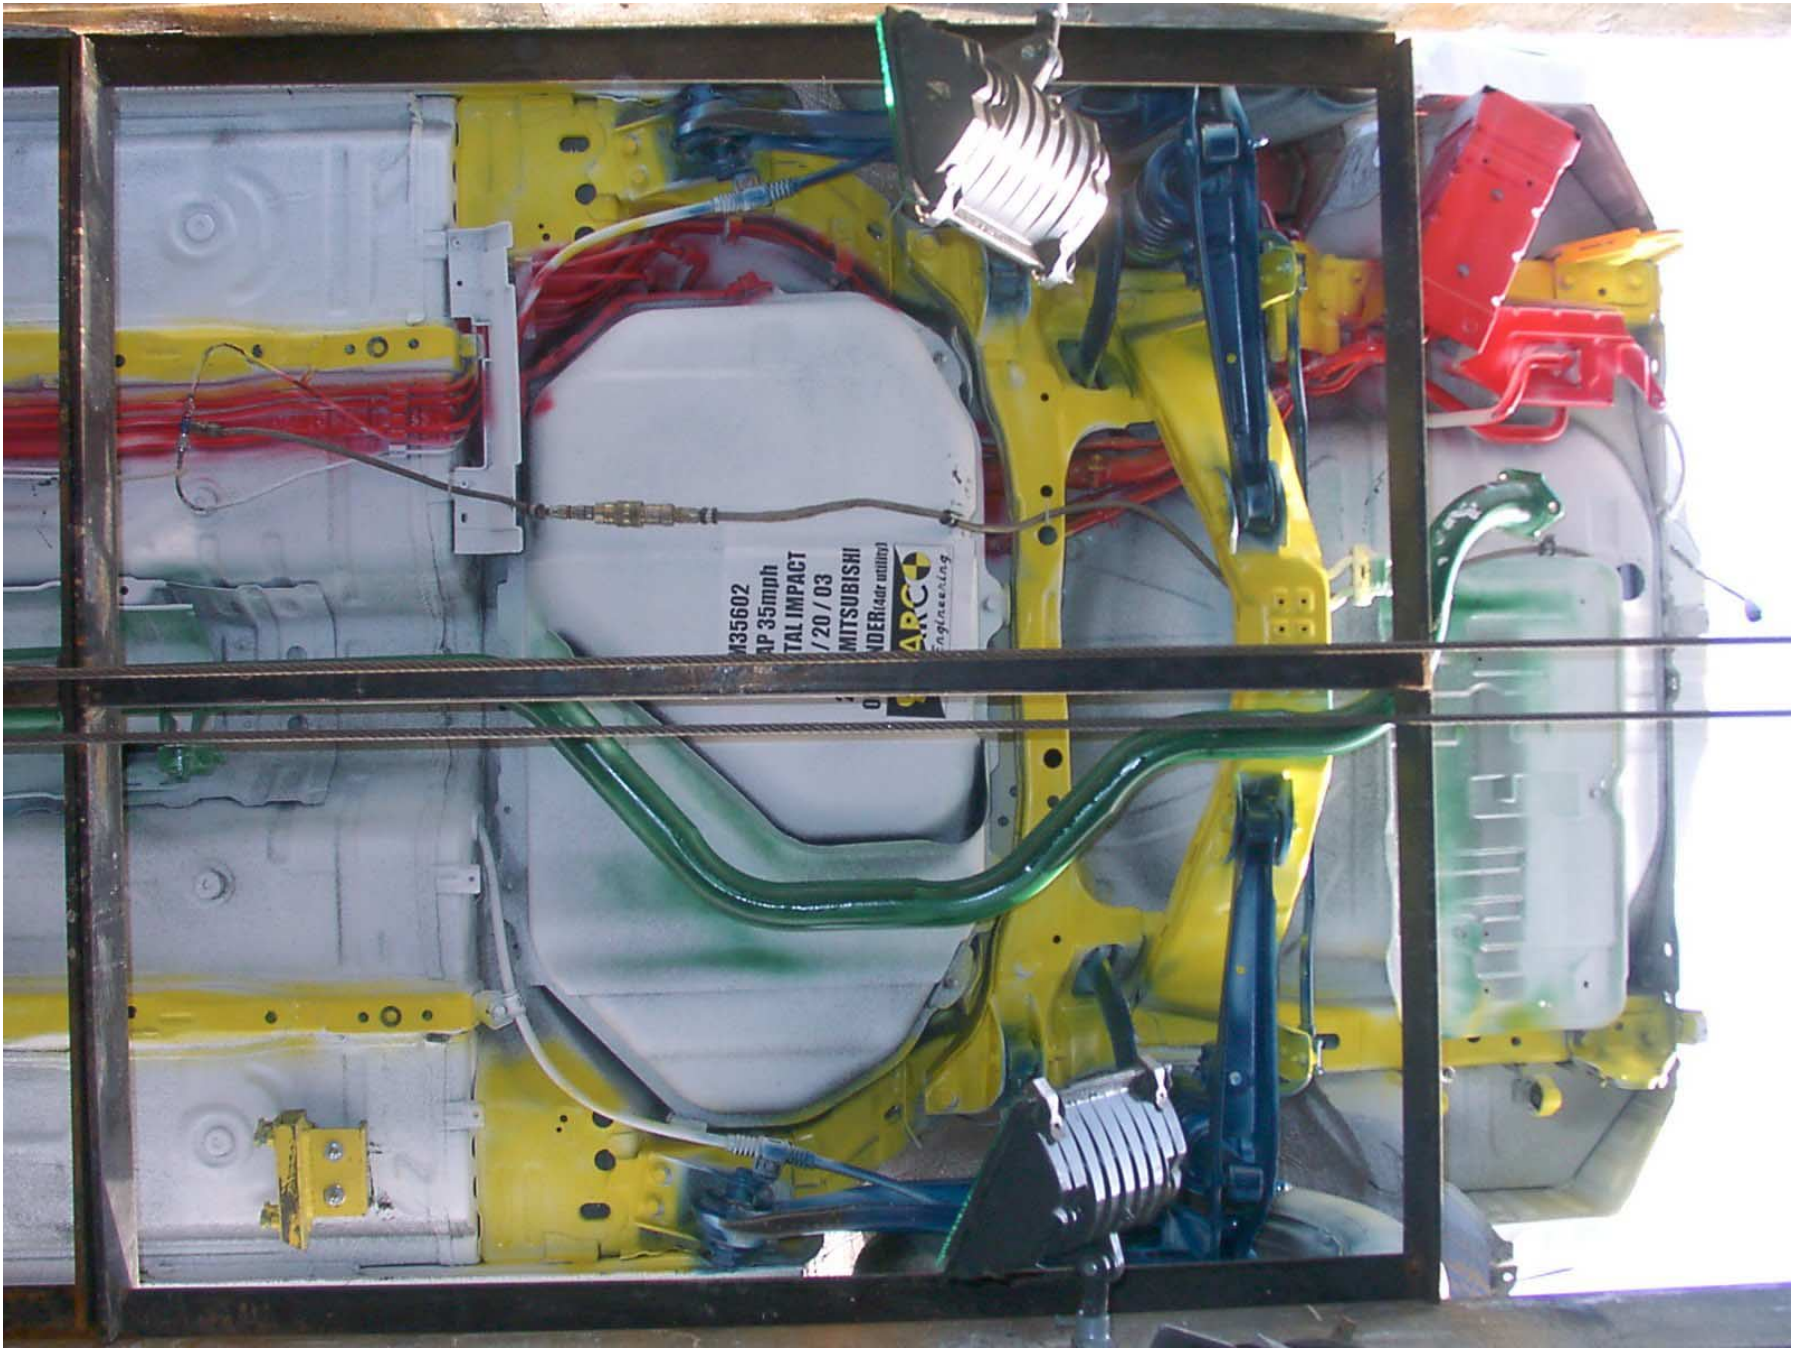


Figure A-28: Pre-Test Rear Underbody View

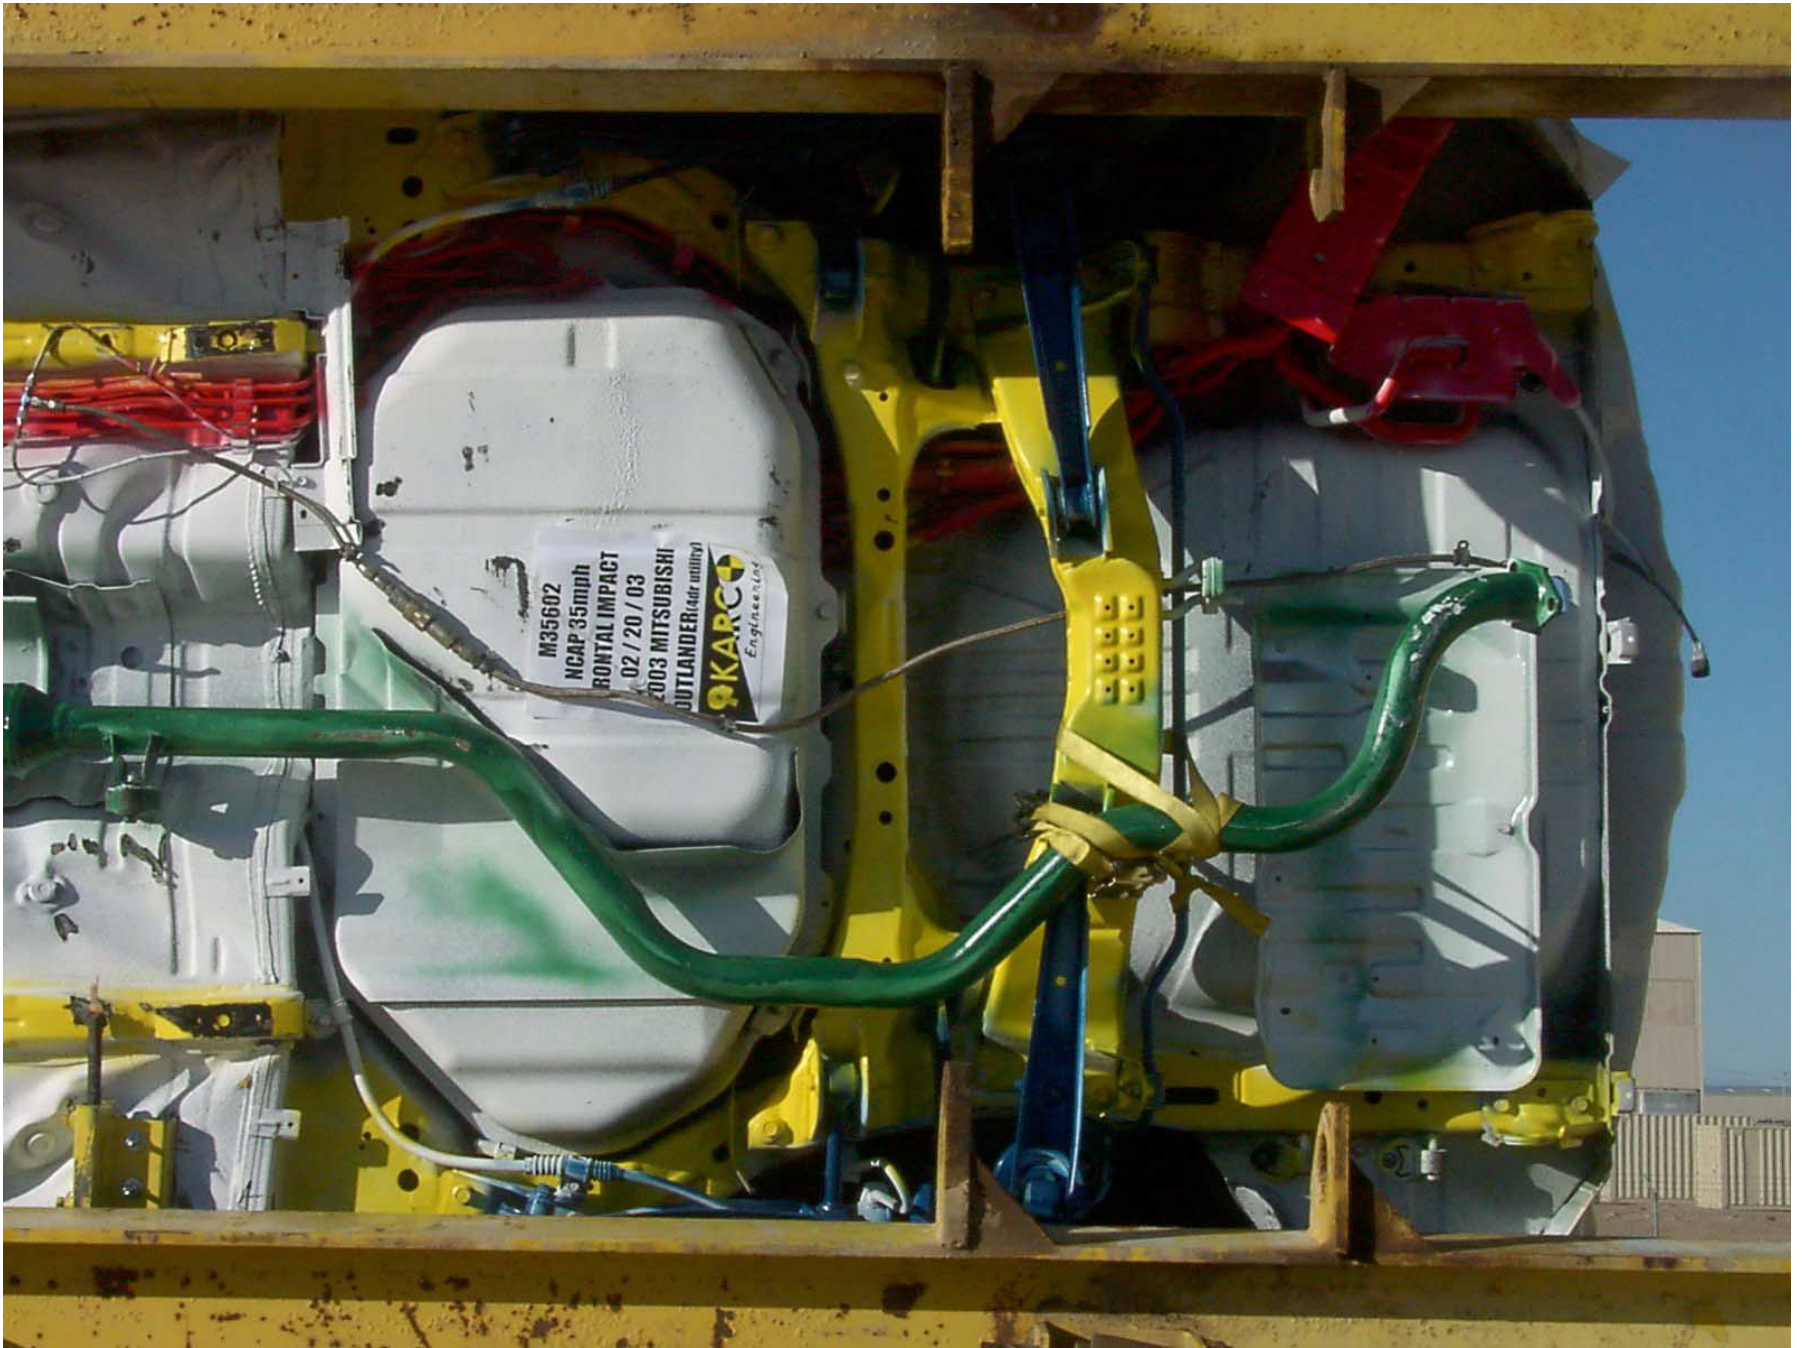


Figure A-29: Post-Test Rear Underbody View



Figure A-30: Pre-Test Driver Dummy Front View (Head Position)



Figure A-31: Post-Test Driver Dummy Front View (Head Position)



Figure A-32: Pre-Test Driver Dummy Front Through Window



Figure A-33: Post-Test Driver Dummy Front Through Window



Figure A-34: Pre-Test Driver Dummy Door Open



Figure A-35: Post-Test Driver Dummy Door Open



Figure A-36: Pre-Test Driver Dummy Feet



Figure A-37: Post-Test Driver Dummy Feet



Figure A-38: Pre-Test Driver Side Knee Bolster



Figure A-39: Post-Test Driver Side Knee Bolster



Figure A-40: Pre-Test Driver Side Floor Pan



Figure A-41: Post-Test Driver Side Floor Pan



Figure A-42: Post-Test Driver Dummy Head



Figure A-43: Post-Test Driver Dummy Contact to Air Bag



Figure A-44: Pre-Test Passenger Dummy Front View (Head Position)



Figure A-45: Post-Test Passenger Dummy Front View (Head Position)

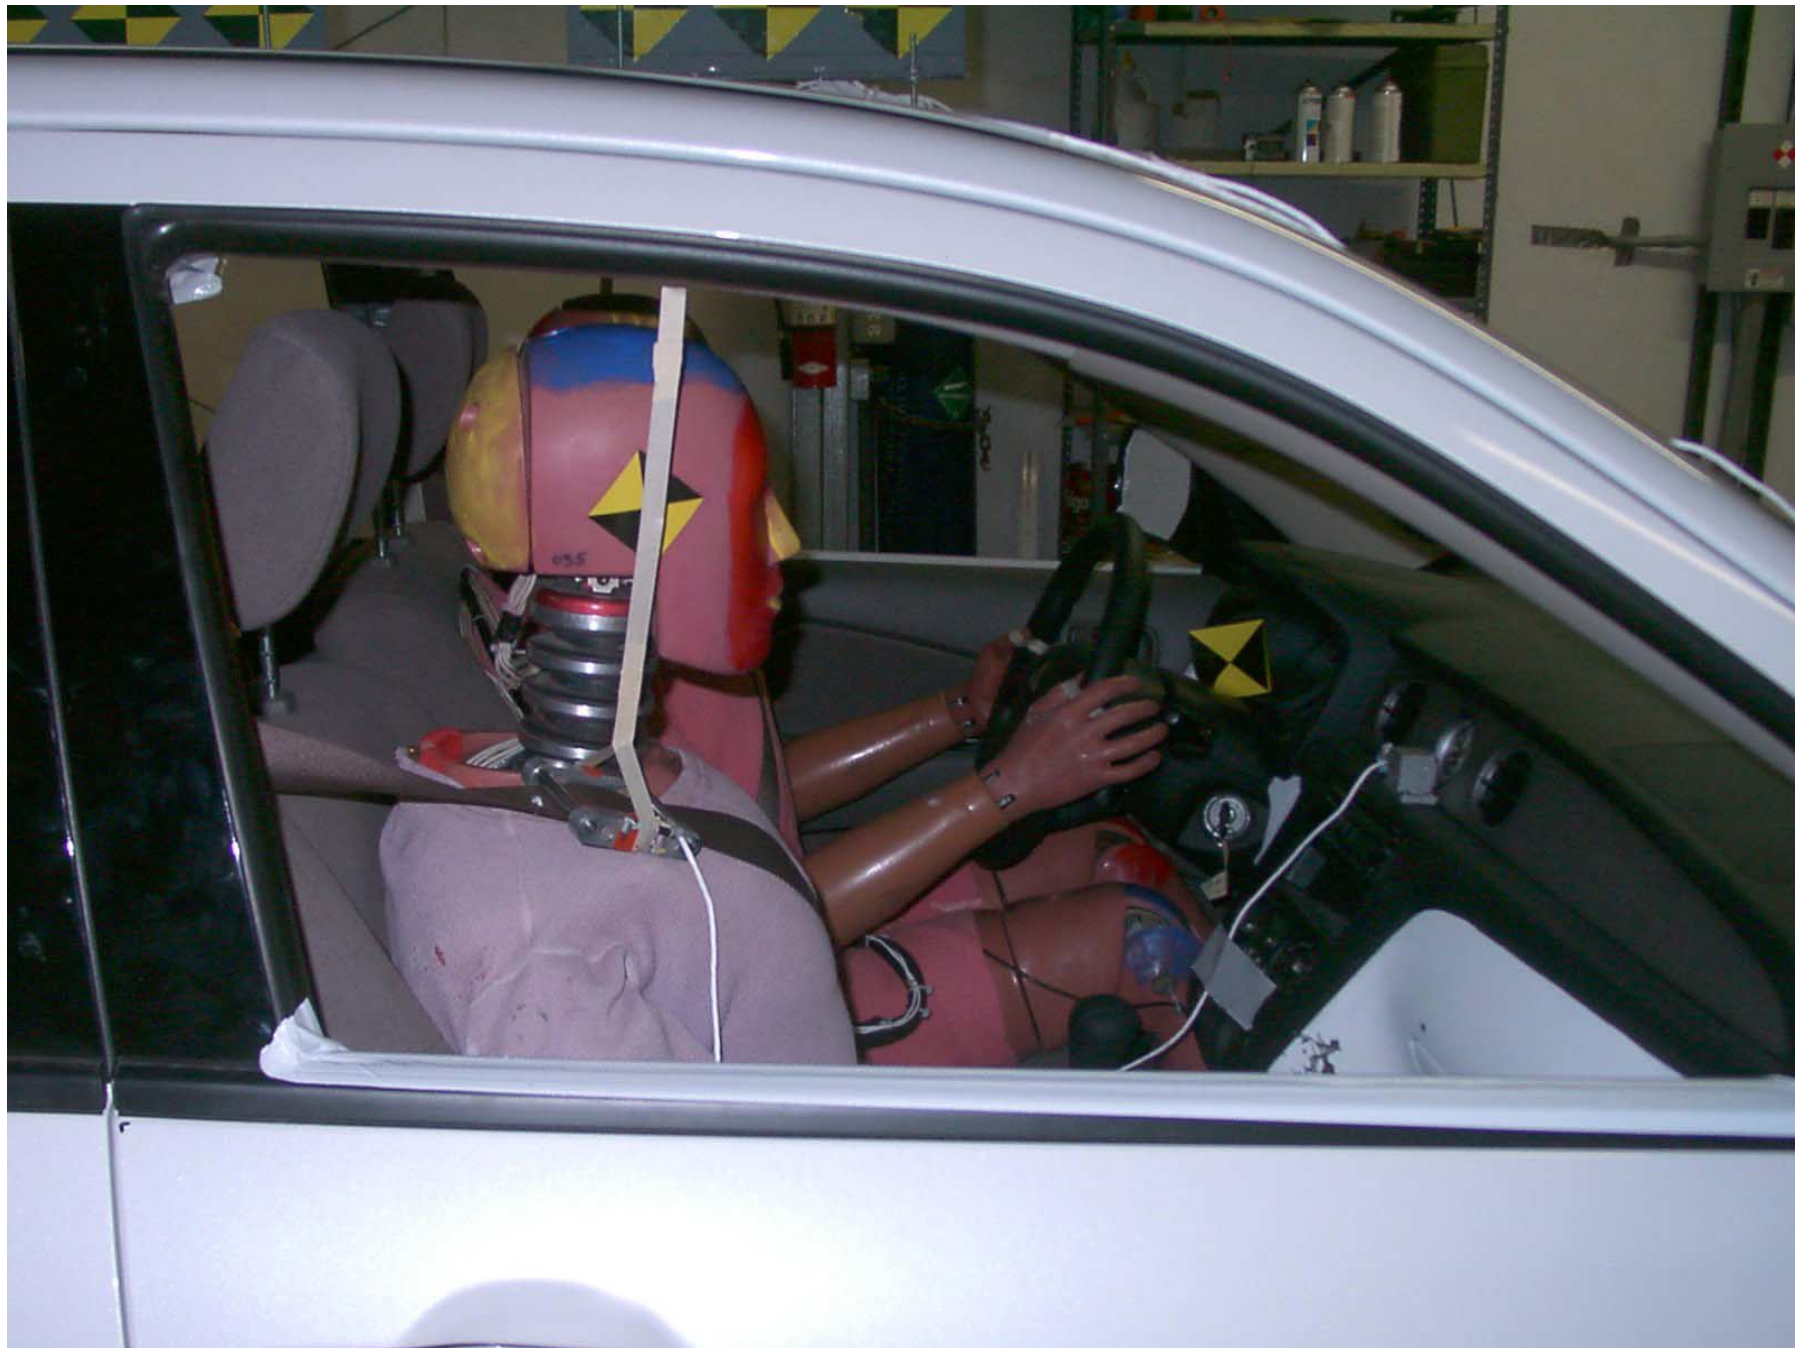


Figure A-46: Pre-Test Passenger Dummy Front Through Window



Figure A-47: Post-Test Passenger Dummy Front Through Window



Figure A-48: Pre-Test Passenger Dummy Door Open



Figure A-49: Post-Test Passenger Dummy Door Open



Figure A-50: Pre-Test Passenger Dummy Feet

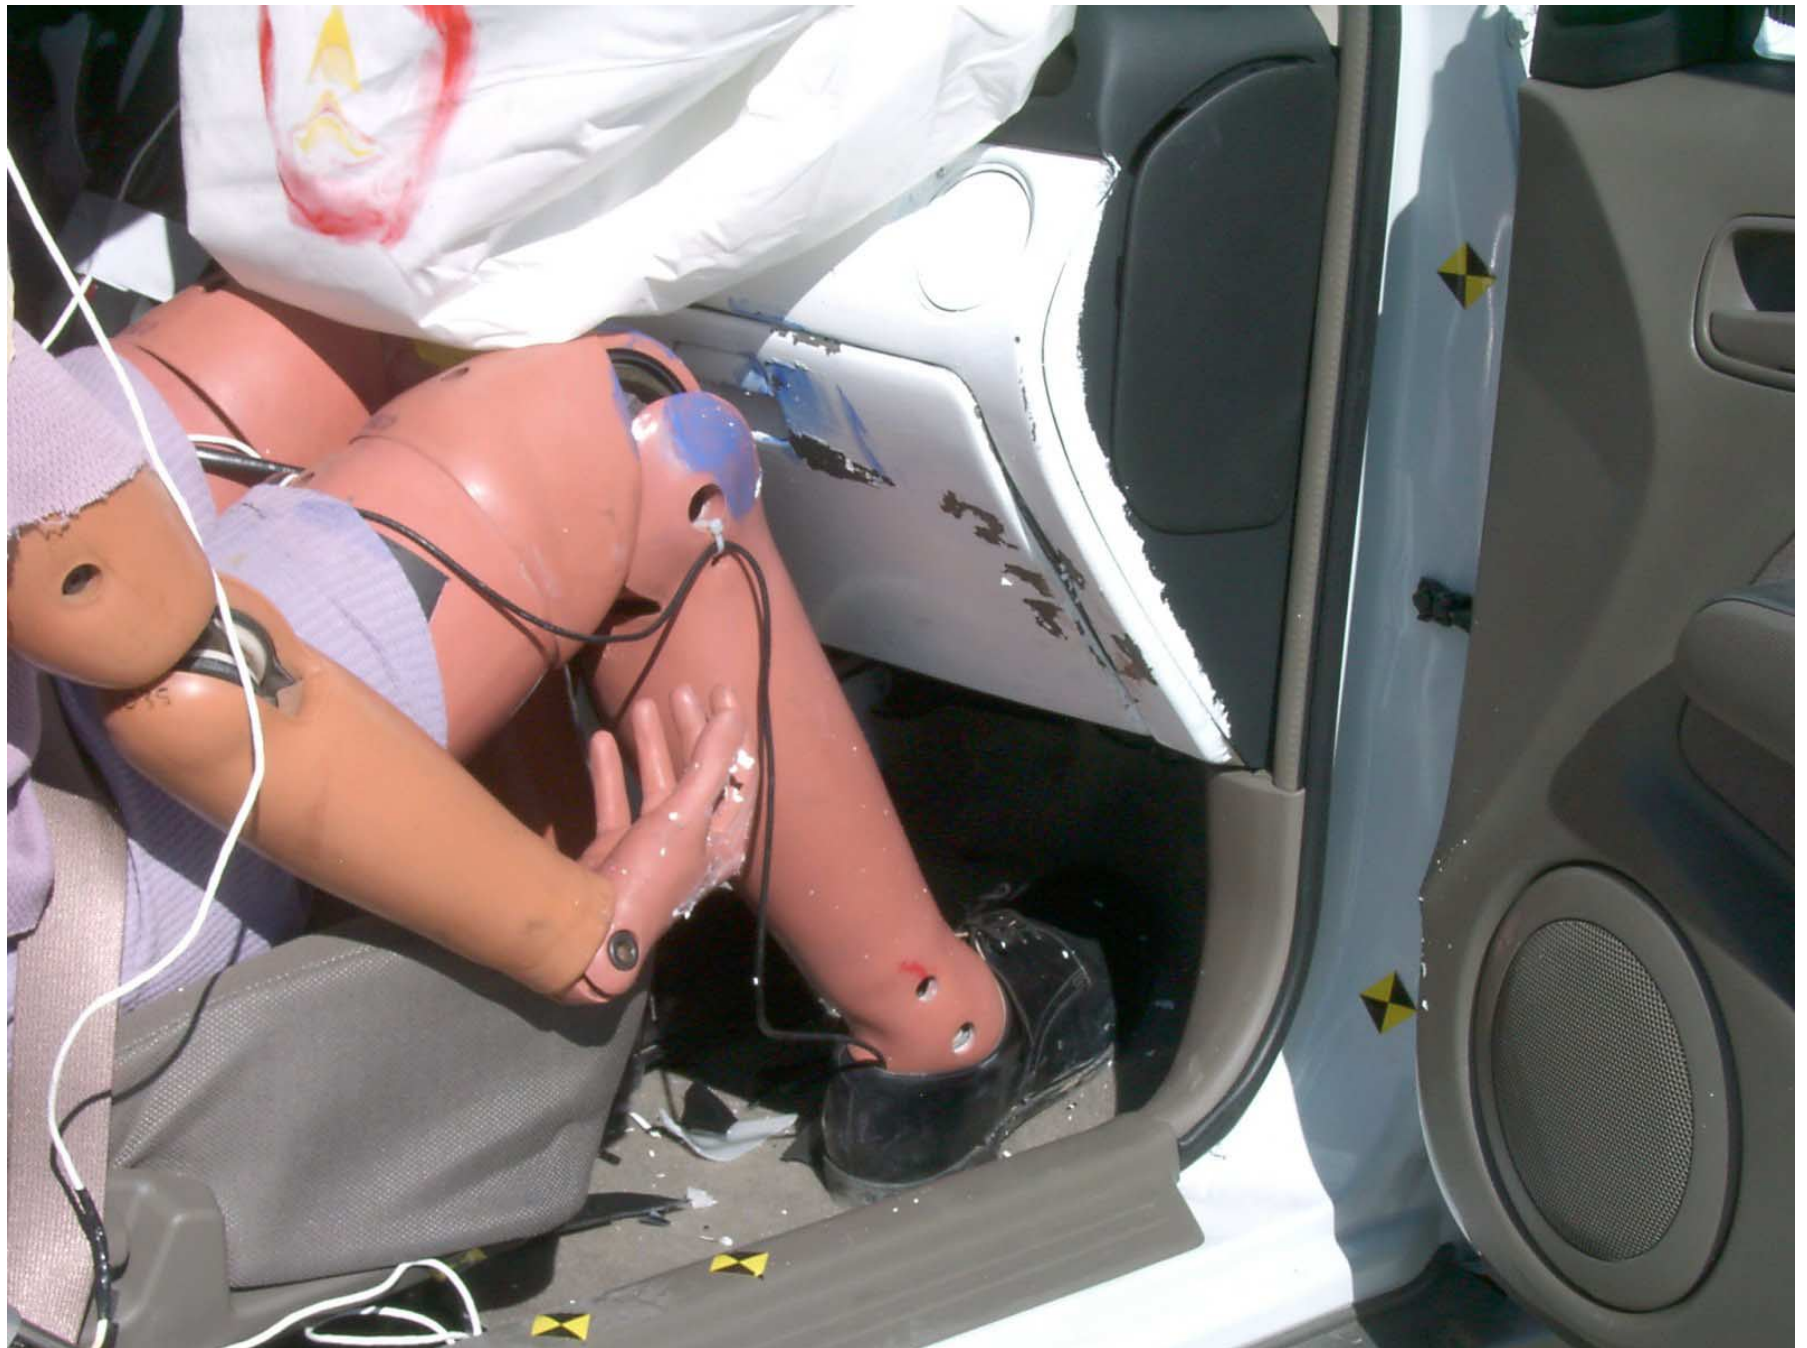


Figure A-51: Post-Test Passenger Dummy Feet



Figure A-52: Pre-Test Passenger Side Floor Pan



Figure A-53: Post-Test Passenger Side Floor Pan



Figure A-54: Pre-Test Passenger Side Knee Bolster



Figure A-55: Post-Test Passenger Side Knee Bolster



Figure A-56: Post-Test Passenger Dummy Head



Figure A-57: Post-Test Passenger Dummy Contact to Air Bag



Figure A-58: Vehicle on Rollover Device



Figure A-59: Vehicle During Impact

APPENDIX B

DATA PLOTS

LIST OF DATA PLOTS

Data Plot		Page
B-1	Driver Head Primary X	B-1
B-2	Driver Head Primary X Velocity	B-2
B-3	Driver Head Primary X Displacement	B-3
B-4	Driver Head Primary Y	B-4
B-5	Driver Head Primary Z	B-5
B-6	Driver Head Resultant Primary	B-6
B-7	Driver Head Redundant X	B-7
B-8	Driver Head Redundant X Velocity	B-8
B-9	Driver Head Redundant X Displacement	B-9
B-10	Driver Head Redundant Y	B-10
B-11	Driver Head Redundant Z	B-11
B-12	Driver Head Resultant Redundant	B-12
B-13	Driver Neck Force X	B-13
B-14	Driver Neck Force Y	B-14
B-15	Driver Neck Force Z	B-15
B-16	Driver Neck Force Resultant	B-16
B-17	Driver Neck Moment X	B-17
B-18	Driver Neck Moment Y	B-18
B-19	Driver Neck Moment Z	B-19
B-20	Driver Neck Moment Resultant	B-20
B-21	Driver Chest Primary X	B-21
B-22	Driver Chest Primary X Velocity	B-22
B-23	Driver Chest Primary X Displacement	B-23
B-24	Driver Chest Primary Y	B-24
B-25	Driver Chest Primary Z	B-25
B-26	Driver Chest Primary Resultant	B-26
B-27	Driver Chest Redundant X	B-27
B-28	Driver Chest Redundant X Velocity	B-28
B-29	Driver Chest Redundant X Displacement	B-29
B-30	Driver Chest Redundant Y	B-30
B-31	Driver Chest Redundant Z	B-31
B-32	Driver Chest Redundant Resultant	B-32
B-33	Driver Chest Displacement X	B-33

LIST OF DATA PLOTS...(Continued)

Data Plot		Page
B-34	Driver Pelvis X	B-34
B-35	Driver Pelvis X Velocity	B-35
B-36	Driver Pelvis X Displacement	B-36
B-37	Driver Pelvis Y	B-37
B-38	Driver Pelvis Z	B-38
B-39	Driver Pelvis Resultant	B-39
B-40	Driver Left Femur Force	B-40
B-41	Driver Right Femur Force	B-41
B-42	Driver Left Upper Tibia Moment X	B-42
B-43	Driver Left Upper Tibia Moment Y	B-43
B-44	Driver Right Upper Tibia Moment X	B-44
B-45	Driver Right Upper Tibia Moment Y	B-45
B-46	Driver Left Lower Tibia Moment X	B-46
B-47	Driver Left Lower Tibia Moment Y	B-47
B-48	Driver Left Lower Tibia Force Z	B-48
B-49	Driver Right Lower Tibia Moment X	B-49
B-50	Driver Right Lower Tibia Moment Y	B-50
B-51	Driver Right Lower Tibia Force Z	B-51
B-52	Driver Left Foot Aft X	B-52
B-53	Driver Left Foot Aft Z	B-53
B-54	Driver Left Foot Fore Z	B-54
B-55	Driver Right Foot Aft X	B-55
B-56	Driver Right Foot Aft Z	B-56
B-57	Driver Right Foot Fore Z	B-57
B-58	Driver Lap Belt Force	B-58
B-59	Driver Shoulder Belt Force	B-59
B-60	Driver Shoulder Belt Pullout	B-60
B-61	Driver Shoulder Belt Elongation	B-61
B-62	Passenger Head Primary X	B-62
B-63	Passenger Head Primary X Velocity	B-63
B-64	Passenger Head Primary X Displacement	B-64
B-65	Passenger Head Primary Y	B-65
B-66	Passenger Head Primary Z	B-66
B-67	Passenger Head Resultant Primary	B-67

LIST OF DATA PLOTS...(Continued)


Data Plot		Page
B-68	Passenger Head Redundant X	B-68
B-69	Passenger Head Redundant X Velocity	B-69
B-70	Passenger Head Redundant X Displacement	B-70
B-71	Passenger Head Redundant Y	B-71
B-72	Passenger Head Redundant Z	B-72
B-73	Passenger Head Resultant Redundant	B-73
B-74	Passenger Neck Force X	B-74
B-75	Passenger Neck Force Y	B-75
B-76	Passenger Neck Force Z	B-76
B-77	Passenger Neck Force Resultant	B-77
B-78	Passenger Neck Moment X	B-78
B-79	Passenger Neck Moment Y	B-79
B-80	Passenger Neck Moment Z	B-80
B-81	Passenger Neck Moment Resultant	B-81
B-82	Passenger Chest Primary X	B-82
B-83	Passenger Chest Primary X Velocity	B-83
B-84	Passenger Chest Primary X Displacement	B-84
B-85	Passenger Chest Primary Y	B-85
B-86	Passenger Chest Primary Z	B-86
B-87	Passenger Chest Primary Resultant	B-87
B-88	Passenger Chest Redundant X	B-88
B-89	Passenger Chest Redundant X Velocity	B-89
B-90	Passenger Chest Redundant X Displacement	B-90
B-91	Passenger Chest Redundant Y	B-91
B-92	Passenger Chest Redundant Z	B-92
B-93	Passenger Chest Redundant Resultant	B-93
B-94	Passenger Chest Displacement X	B-94
B-95	Passenger Pelvis X	B-95
B-96	Passenger Pelvis X Velocity	B-96
B-97	Passenger Pelvis X Displacement	B-97
B-98	Passenger Pelvis Y	B-98
B-99	Passenger Pelvis Z	B-99
B-100	Passenger Pelvis Resultant	B-100
B-101	Passenger Left Femur Force	B-101

LIST OF DATA PLOTS...(Continued)

Data Plot		Page
B-102	Passenger Right Femur Force	B-102
B-103	Passenger Left Upper Tibia Moment X	B-103
B-104	Passenger Left Upper Tibia Moment Y	B-104
B-105	Passenger Right Upper Tibia Moment X	B-105
B-106	Passenger Right Upper Tibia Moment Y	B-106
B-107	Passenger Left Lower Tibia Moment X	B-107
B-108	Passenger Left Lower Tibia Moment Y	B-108
B-109	Passenger Left Lower Tibia Force Z	B-109
B-110	Passenger Right Lower Tibia Moment X	B-110
B-111	Passenger Right Lower Tibia Moment Y	B-111
B-112	Passenger Right Lower Tibia Force Z	B-112
B-113	Passenger Left Foot Aft X	B-113
B-114	Passenger Left Foot Aft Z	B-114
B-115	Passenger Left Foot Fore Z	B-115
B-116	Passenger Right Foot Aft X	B-116
B-117	Passenger Right Foot Aft Z	B-117
B-118	Passenger Right Foot Fore Z	B-118
B-119	Passenger Lap Belt Force	B-119
B-120	Passenger Shoulder Belt Force	B-120
B-121	Passenger Shoulder Belt Pullout	B-121
B-122	Passenger Shoulder Belt Elongation	B-122
B-123	Vehicle Left Rear X	B-123
B-124	Vehicle Left Rear X Velocity	B-124
B-125	Vehicle Left Rear X Displacement	B-125
B-126	Vehicle Right Rear X	B-126
B-127	Vehicle Right Rear X Velocity	B-127
B-128	Vehicle Right Rear X Displacement	B-128
B-129	Vehicle Engine Top	B-129
B-130	Vehicle Engine Top Velocity	B-130
B-131	Vehicle Engine Top Displacement	B-131
B-132	Vehicle Engine Bottom	B-132
B-133	Vehicle Engine Bottom Velocity	B-133
B-134	Vehicle Engine Bottom Displacement	B-134
B-135	Vehicle Left Brake Caliper	B-135
B-136	Vehicle Left Brake Caliper Velocity	B-136

LIST OF DATA PLOTS...(Continued)

<u>Data Plot</u>		<u>Page</u>
B-137	Vehicle Left Brake Caliper Displacement	B-137
B-138	Vehicle Right Brake Caliper	B-138
B-139	Vehicle Right Brake Caliper Velocity	B-139
B-140	Vehicle Right Brake Caliper Displacement	B-140
B-141	Vehicle Instrument Panel	B-141
B-142	Vehicle Instrument Panel Velocity	B-142
B-143	Vehicle Instrument Panel Displacement	B-143
B-144	Vehicle Left Rear Z	B-144
B-145	Vehicle Left Rear Z Velocity	B-145
B-146	Vehicle Left Rear Z Displacement	B-146
B-147	Vehicle Right Rear Z	B-147
B-148	Vehicle Right Rear Z Velocity	B-148
B-149	Vehicle Right Rear Z Displacement	B-149

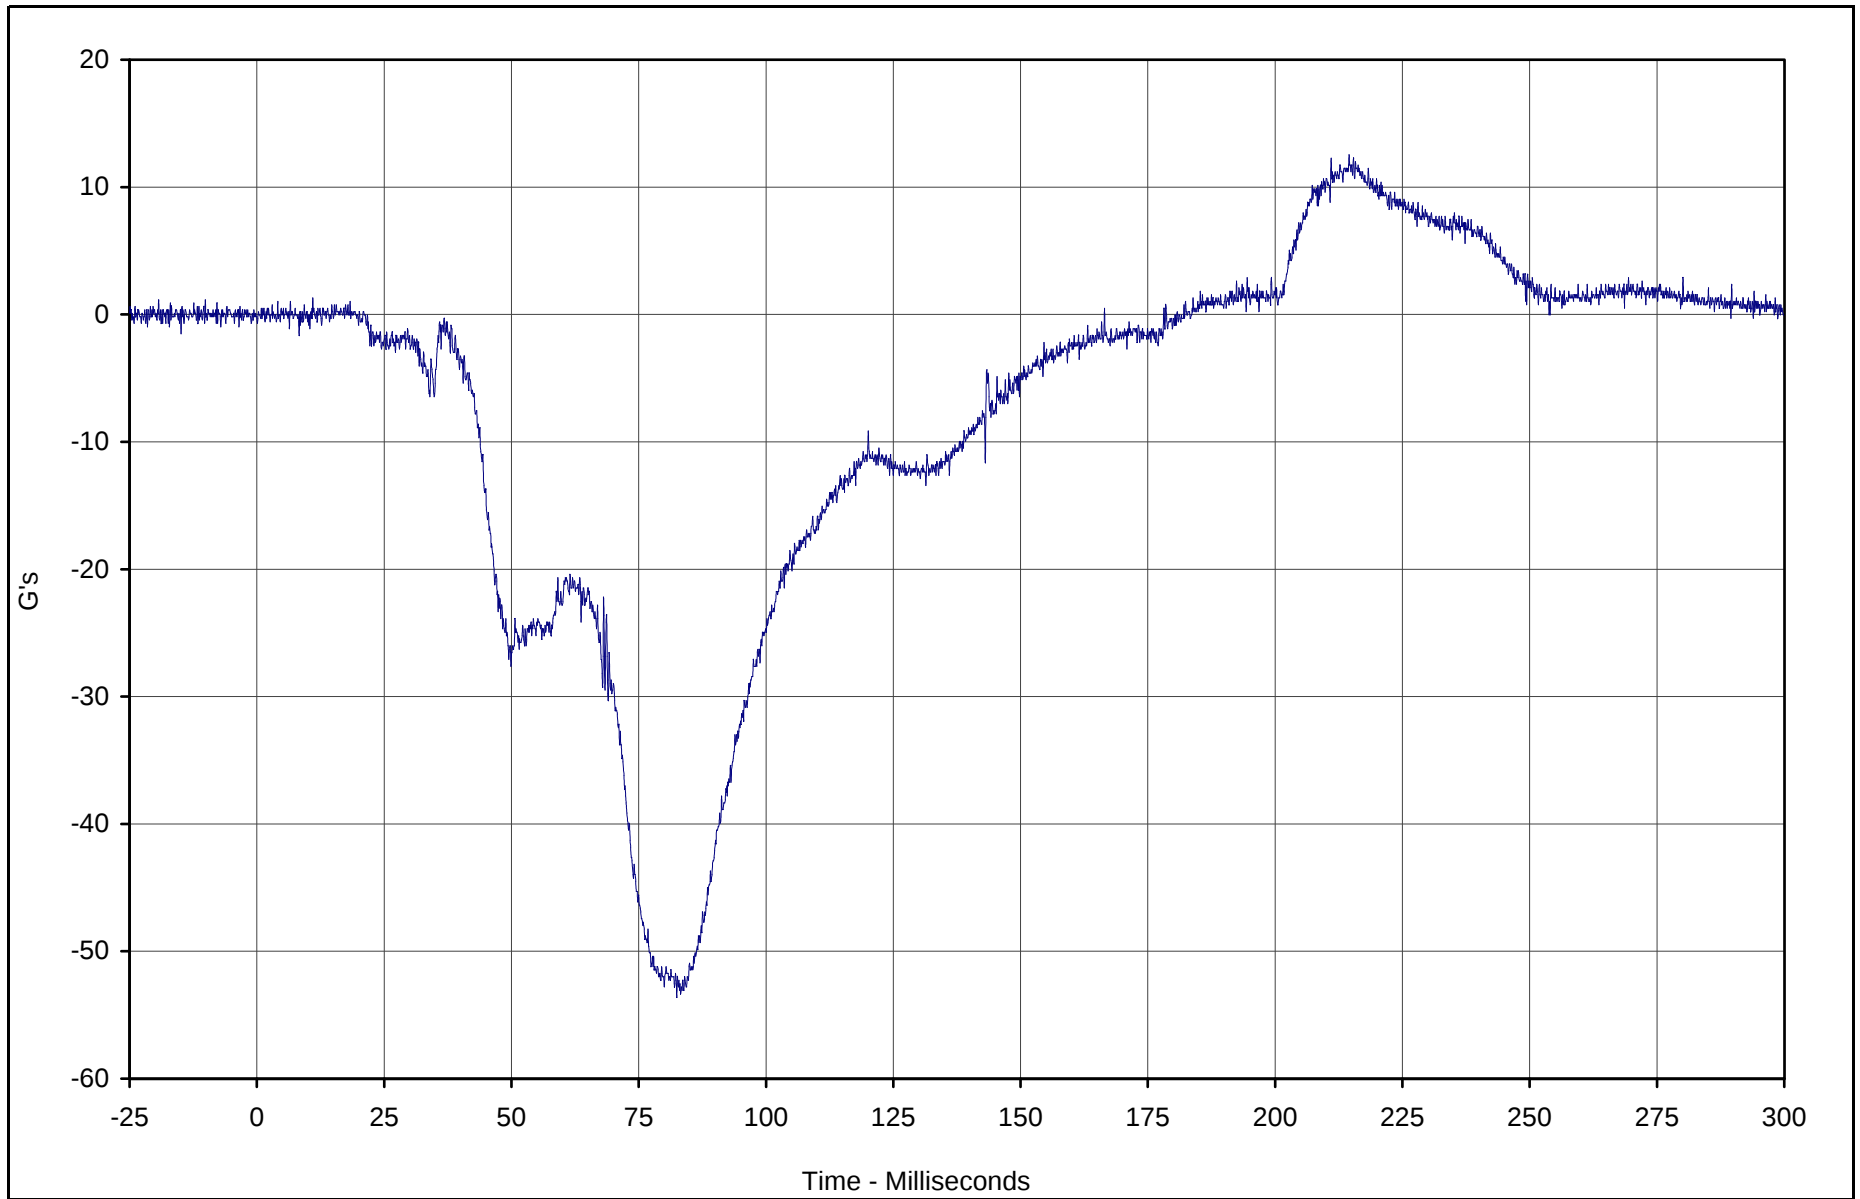

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Head Primary X	001	FIL	G's	12.5	214.5	-53.6	82.5	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

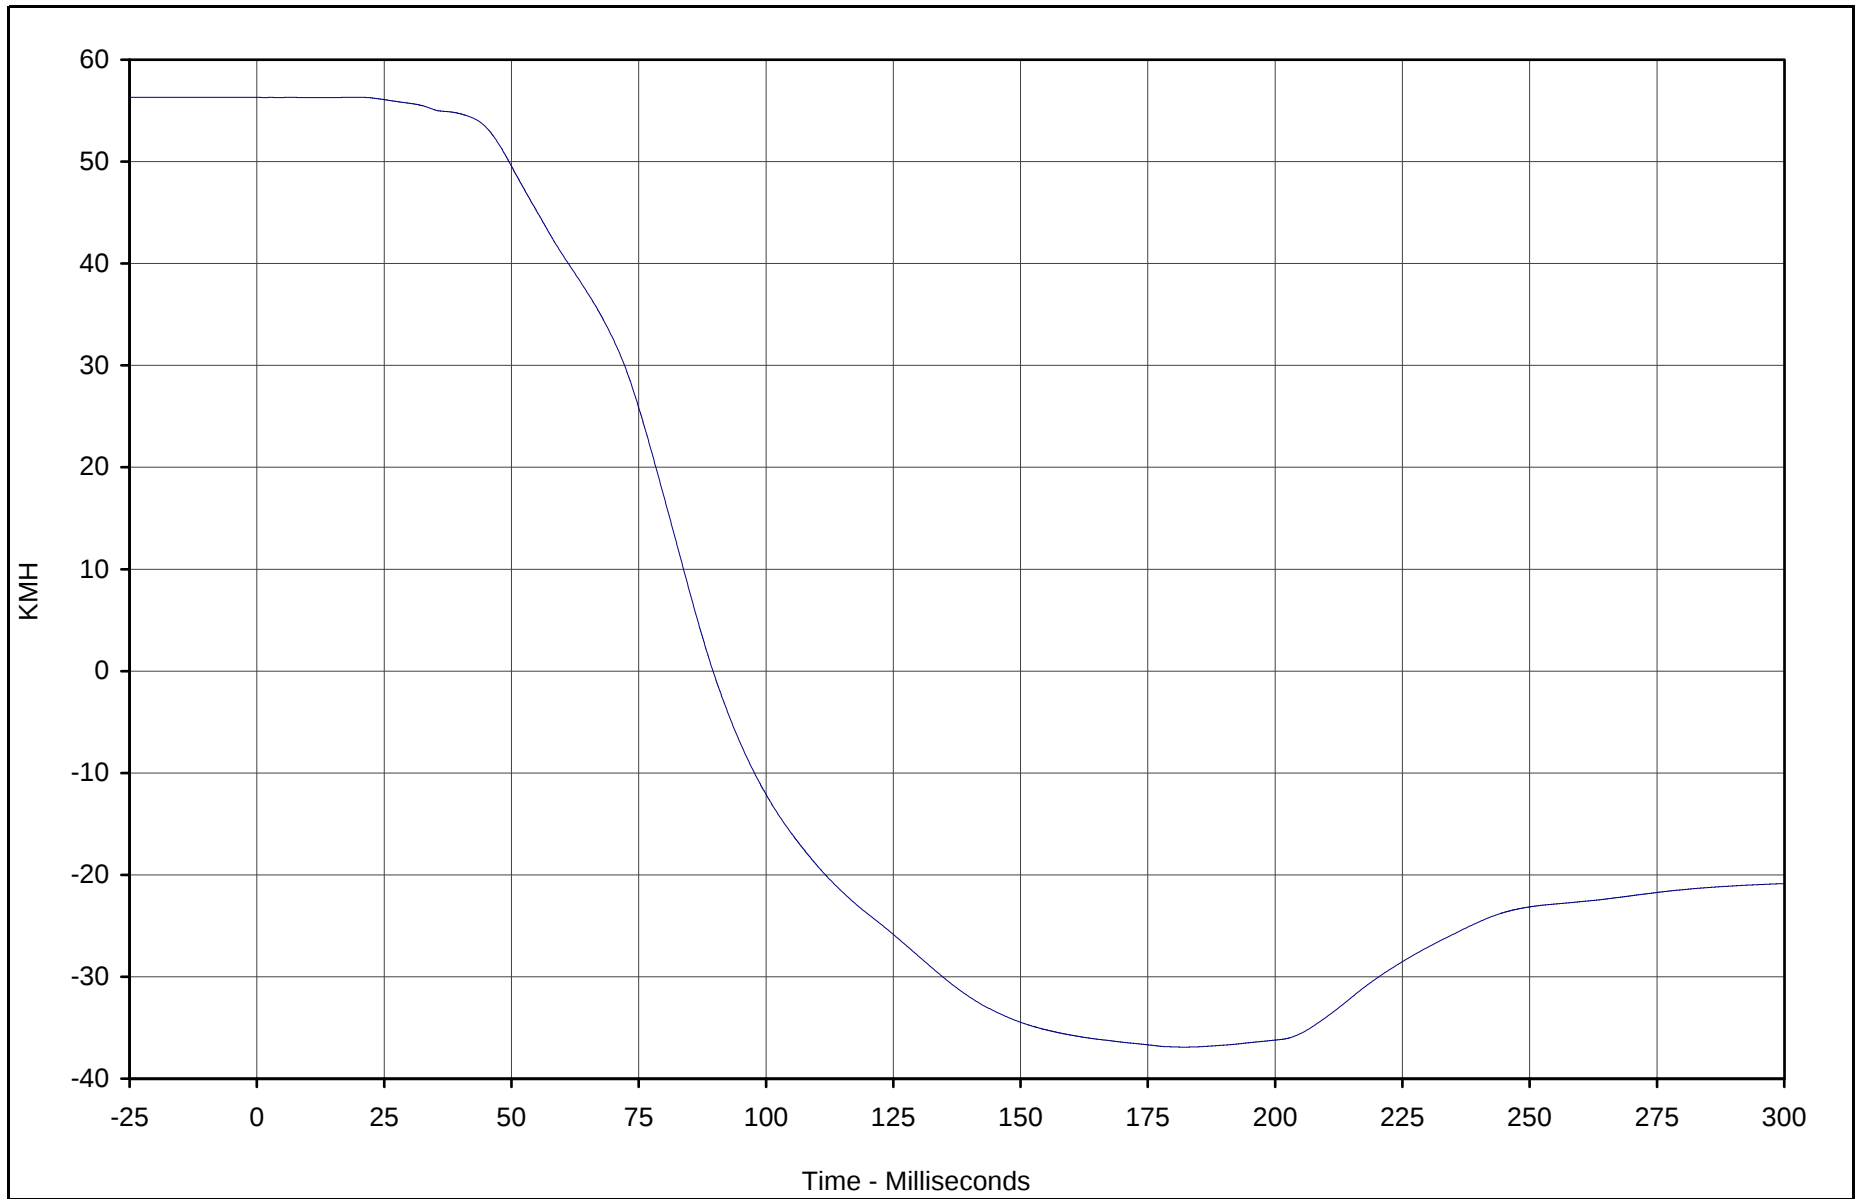

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Head Primary X Velocity	001	IN1	KMH	56.3	19.3	-36.9	182.0	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

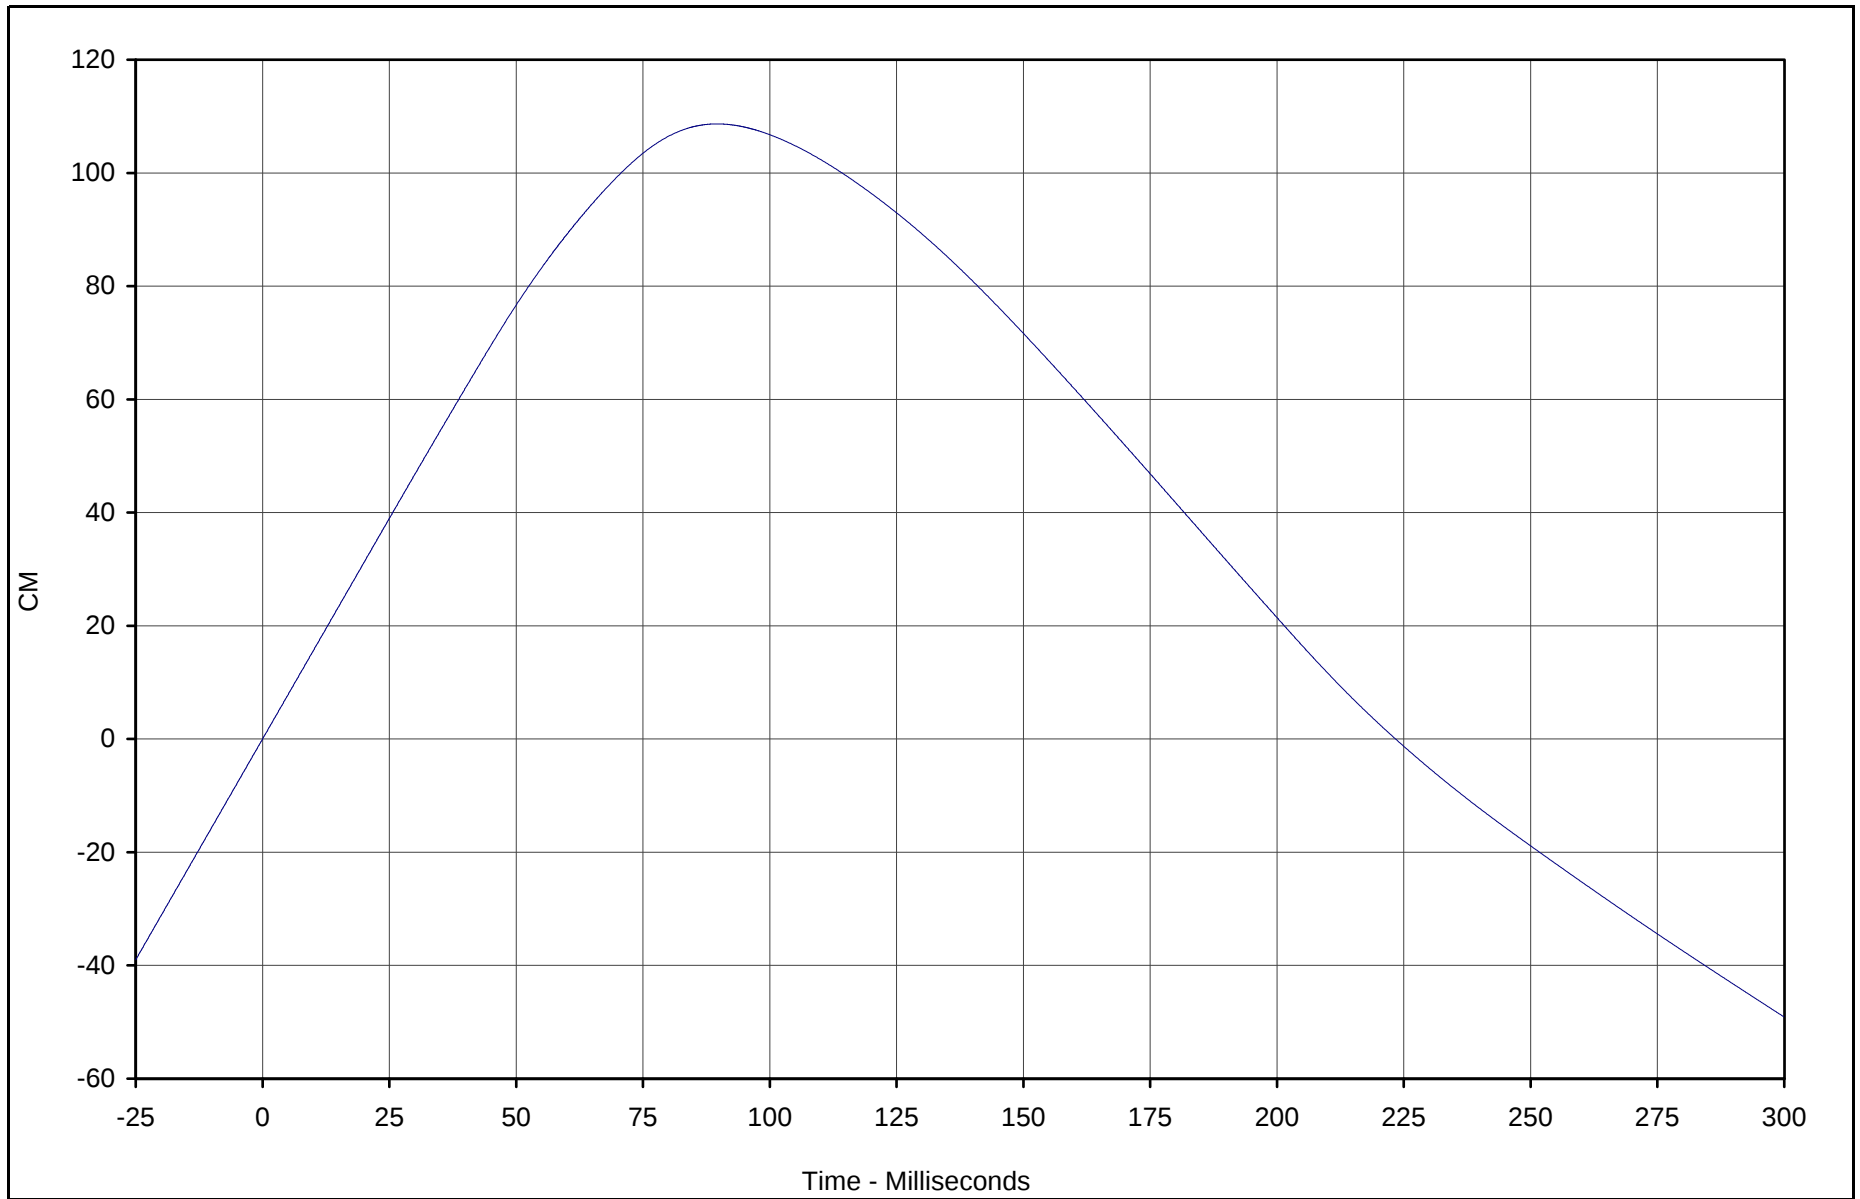

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Head Primary X Displ.	001	IN2	CM	108.7	89.6	-49.1	299.9	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

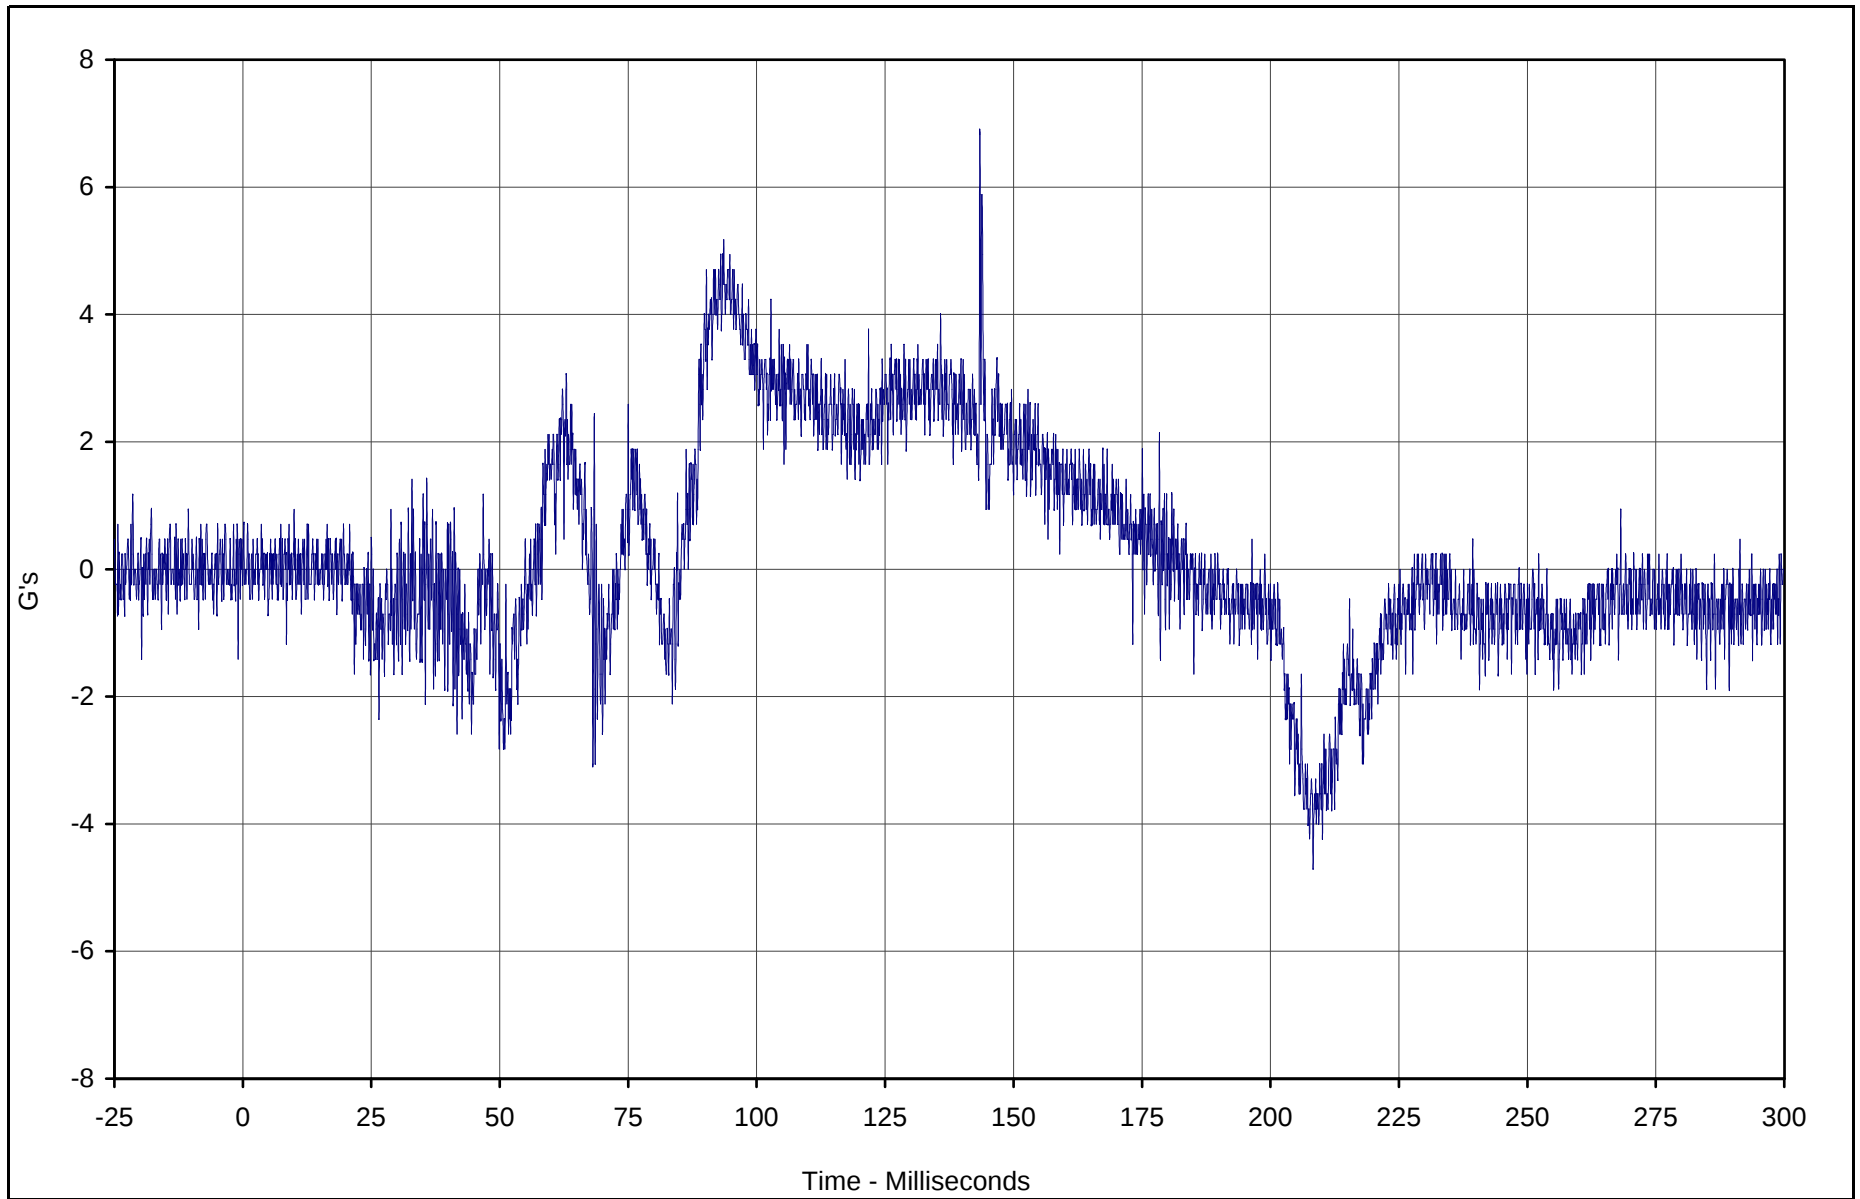

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Head Primary Y	002	FIL	G's	6.8	143.4	-4.7	208.3	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

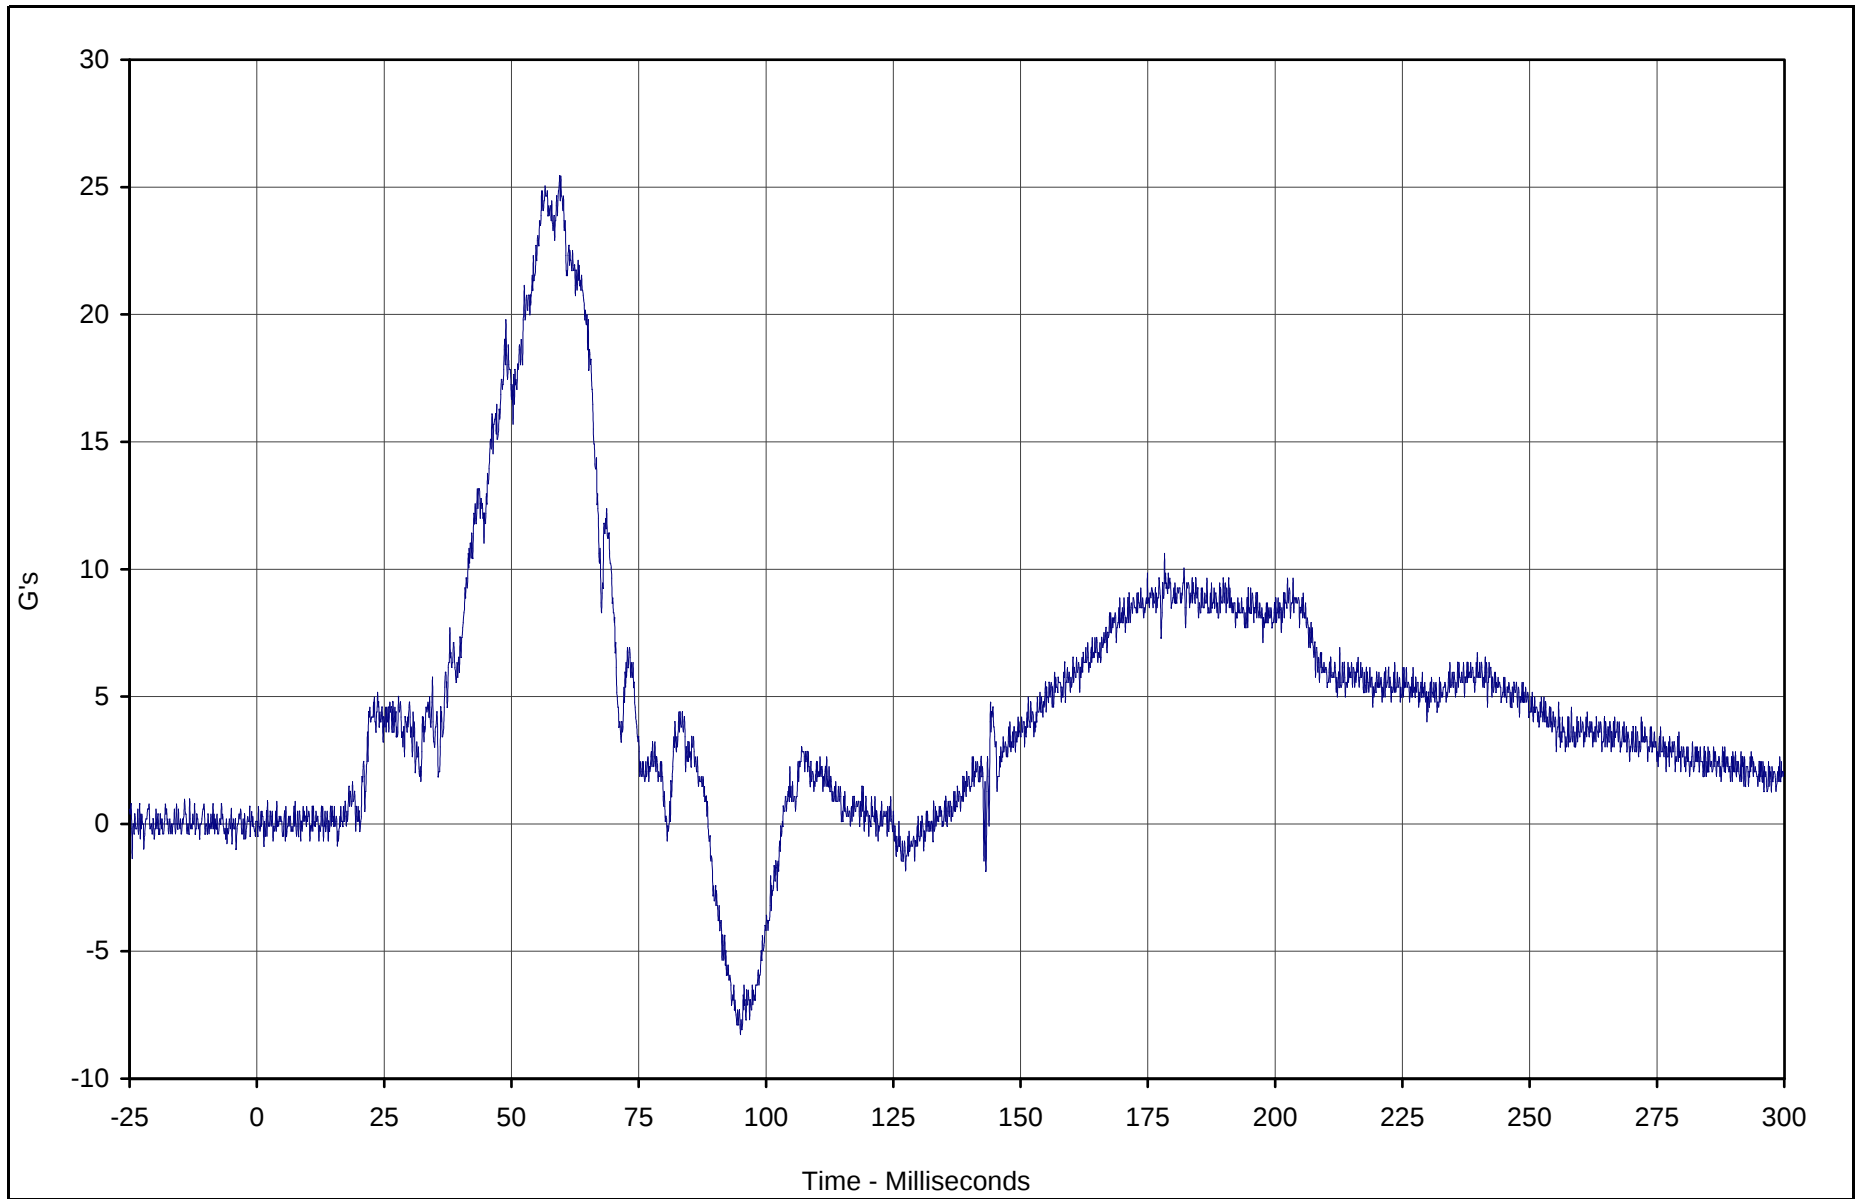

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Head Primary Z	003	FIL	G's	25.4	59.5	-8.3	95.0	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

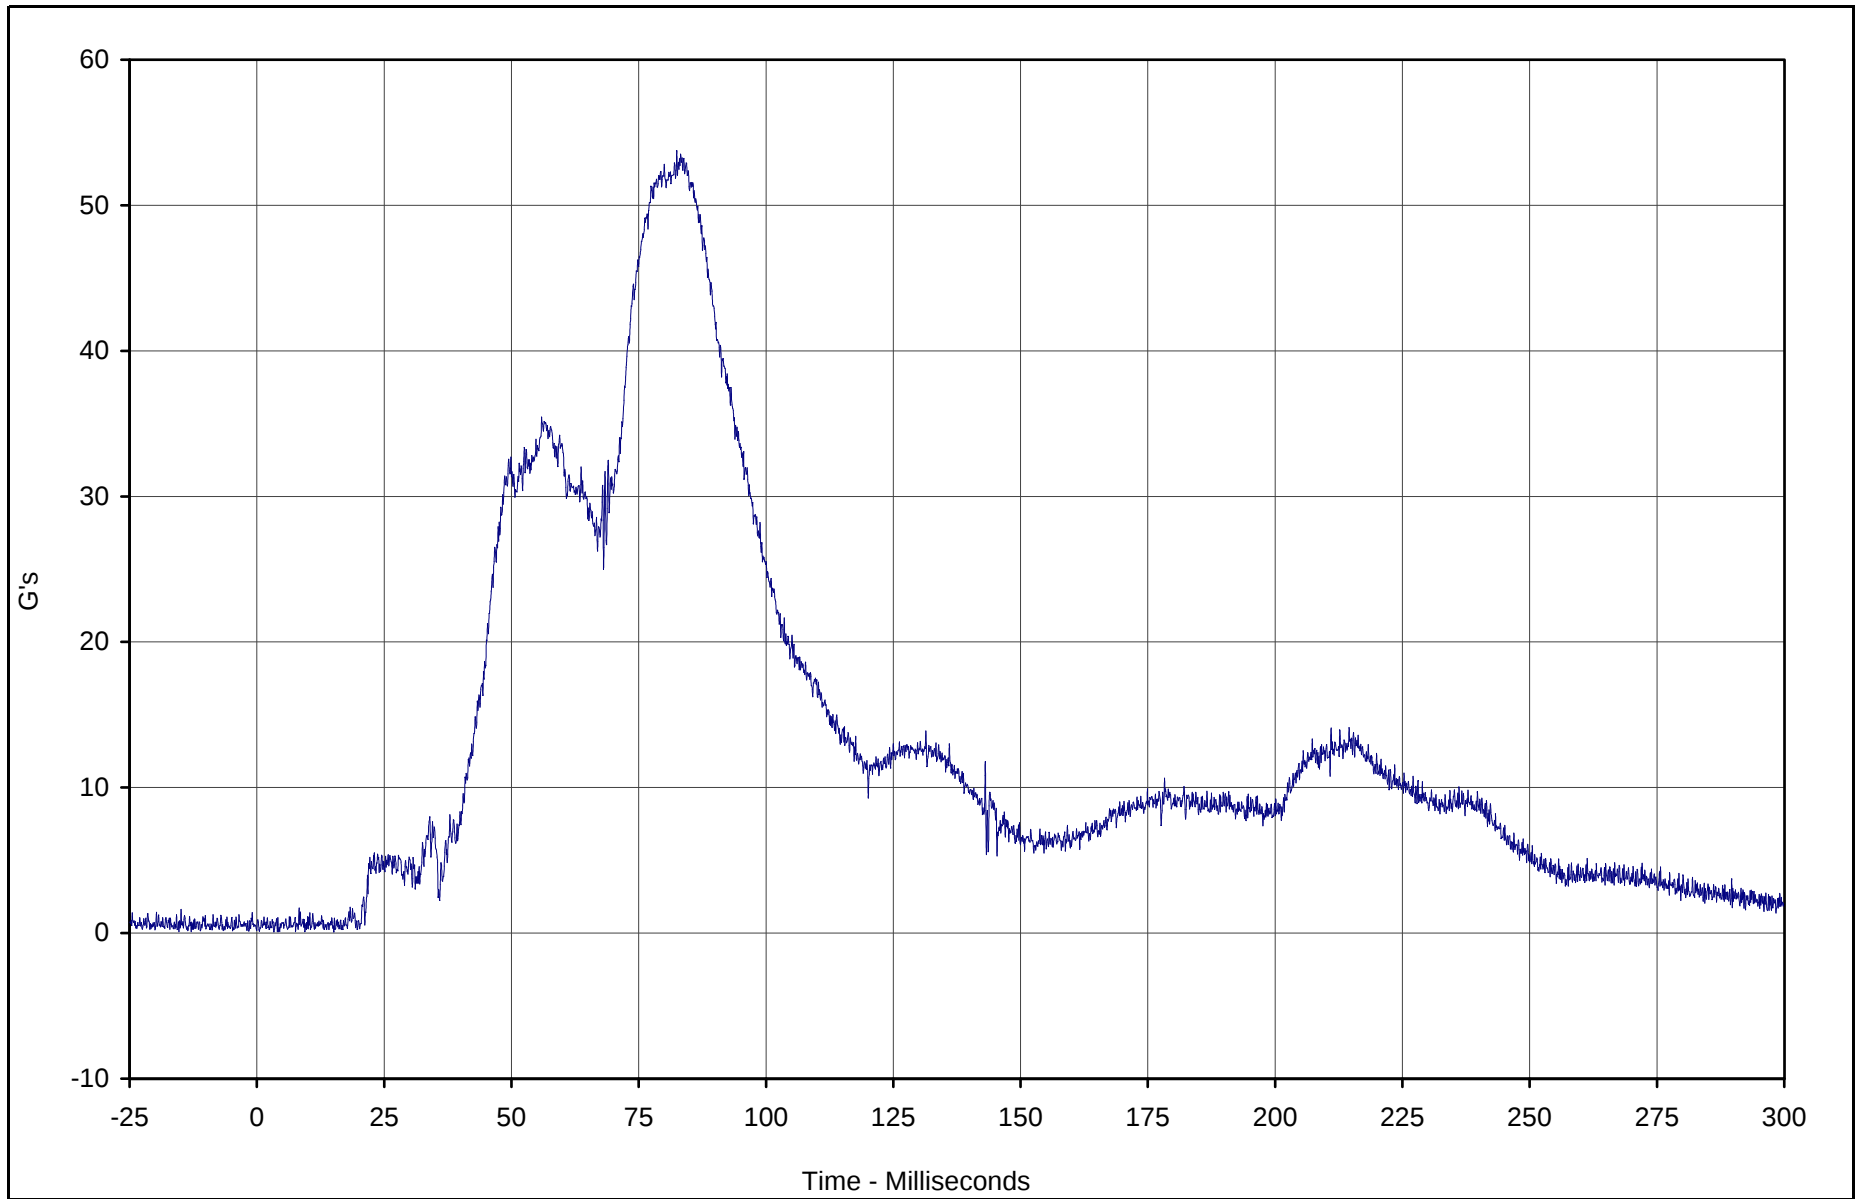

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Head Resultant Primary	001	RES	G's	53.7	82.5	0.1	3.3	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

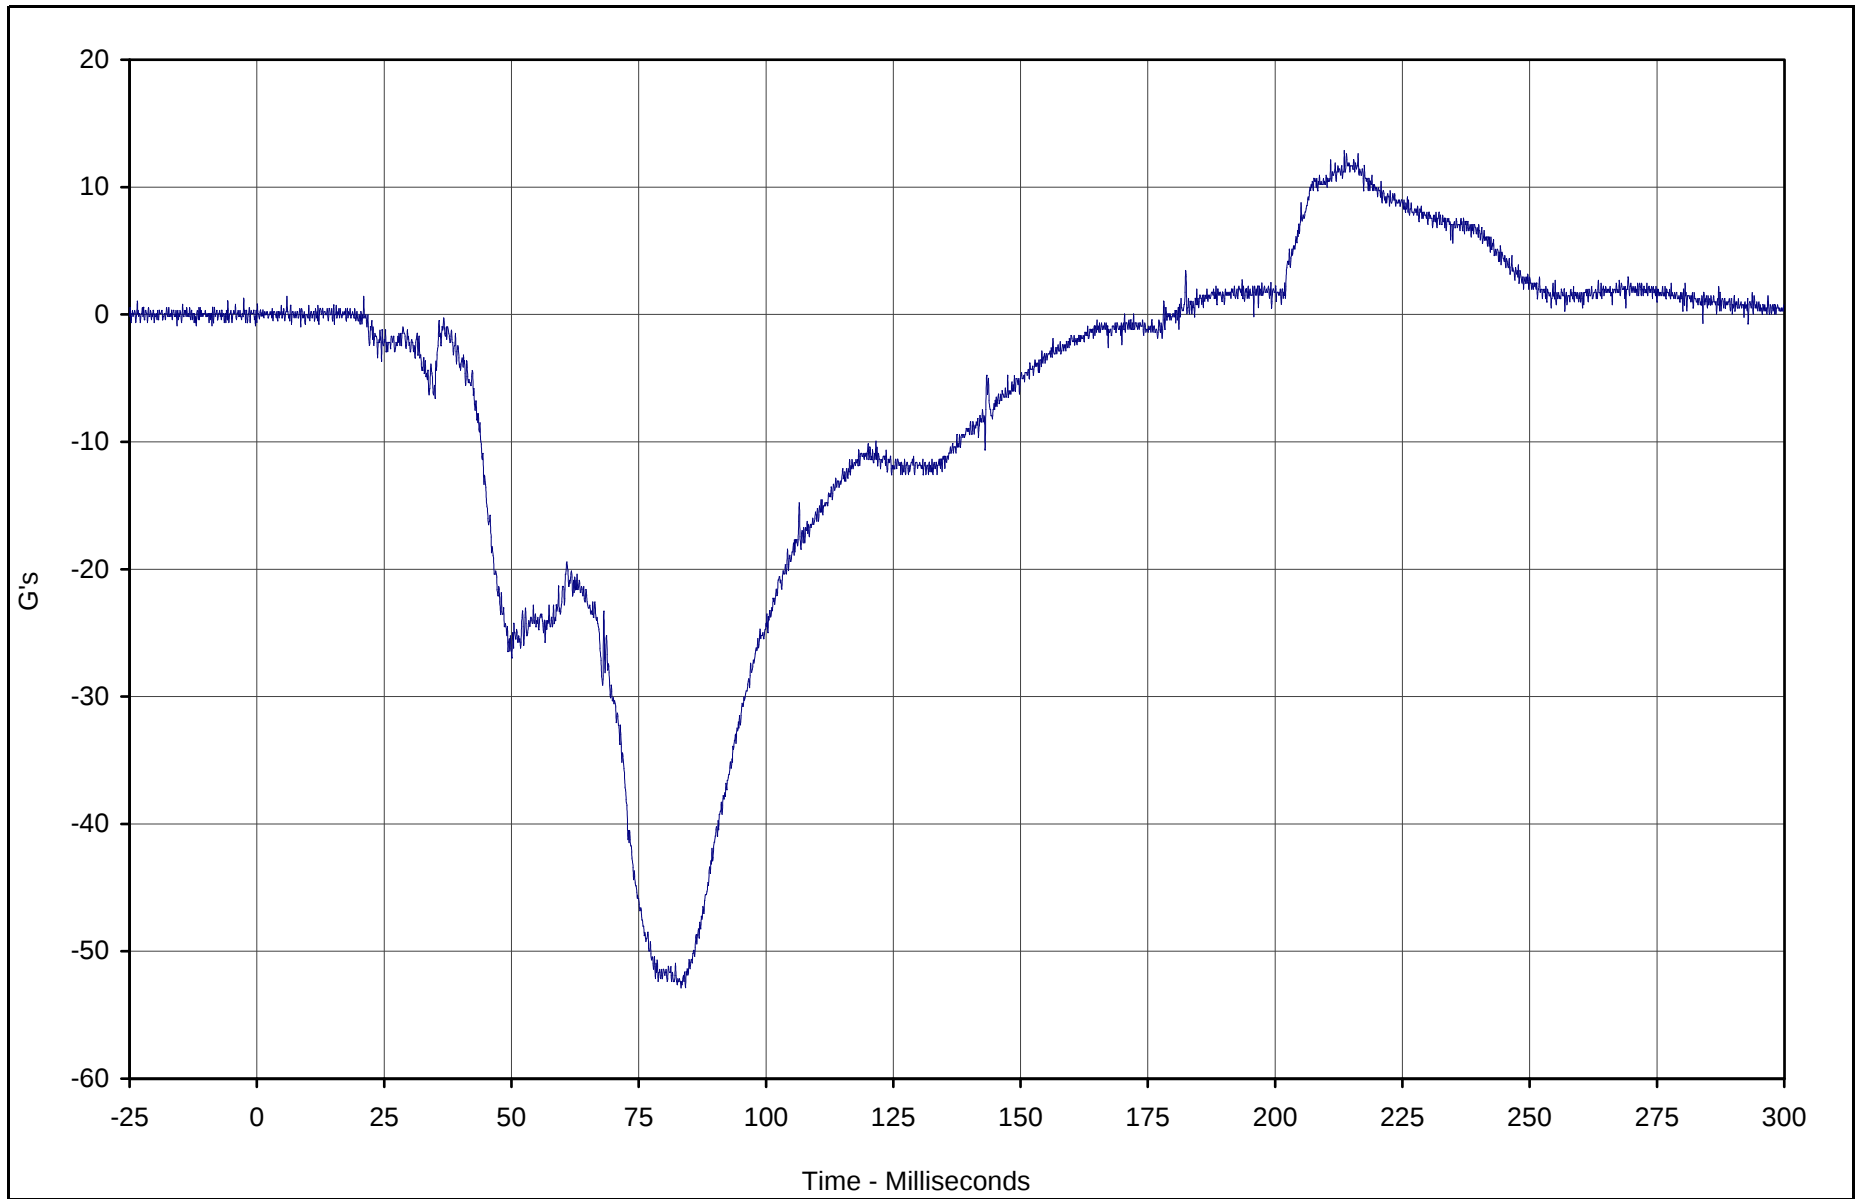

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Head Redundant X	004	FIL	G's	12.9	213.6	-52.9	83.3	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

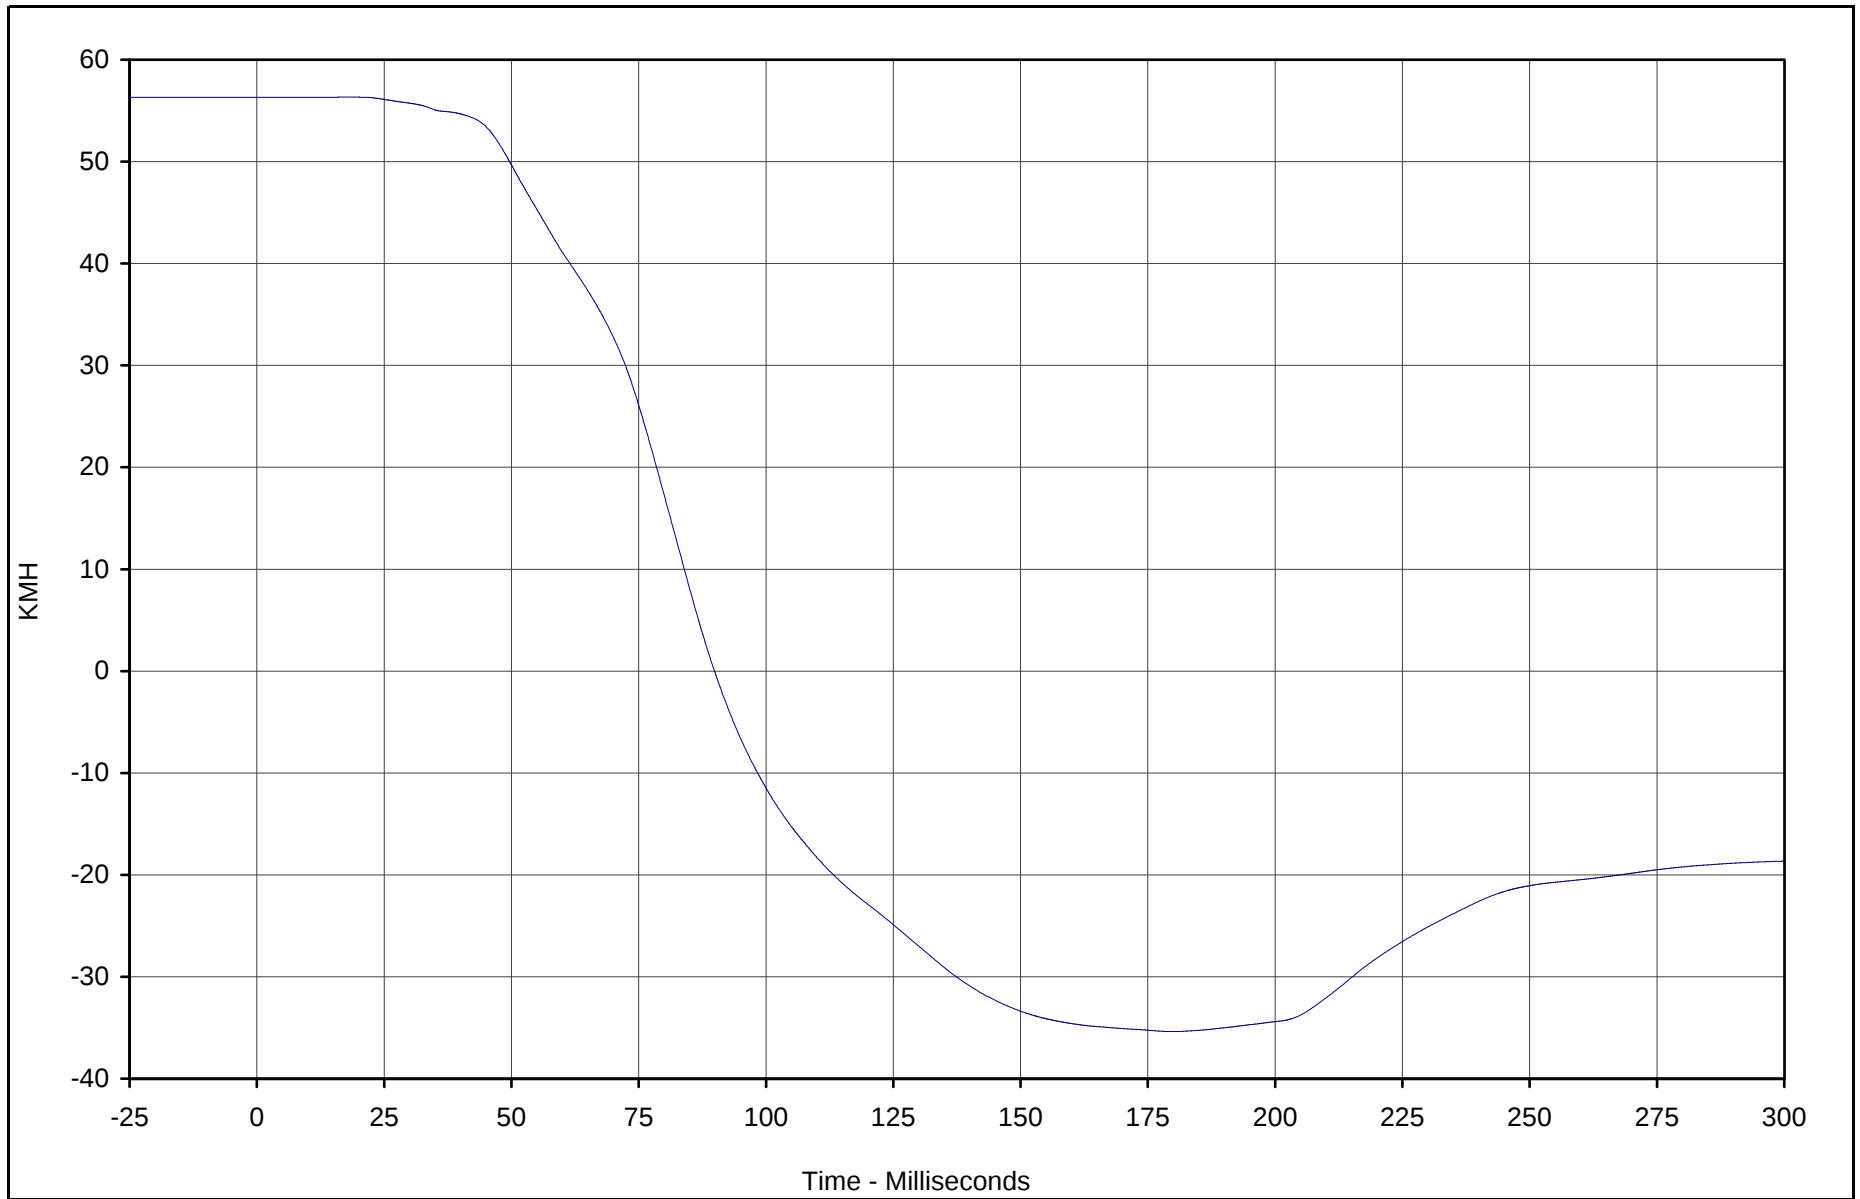

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Head Redundant X Velocity	004	IN1	KMH	56.3	18.6	-35.4	180.7	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

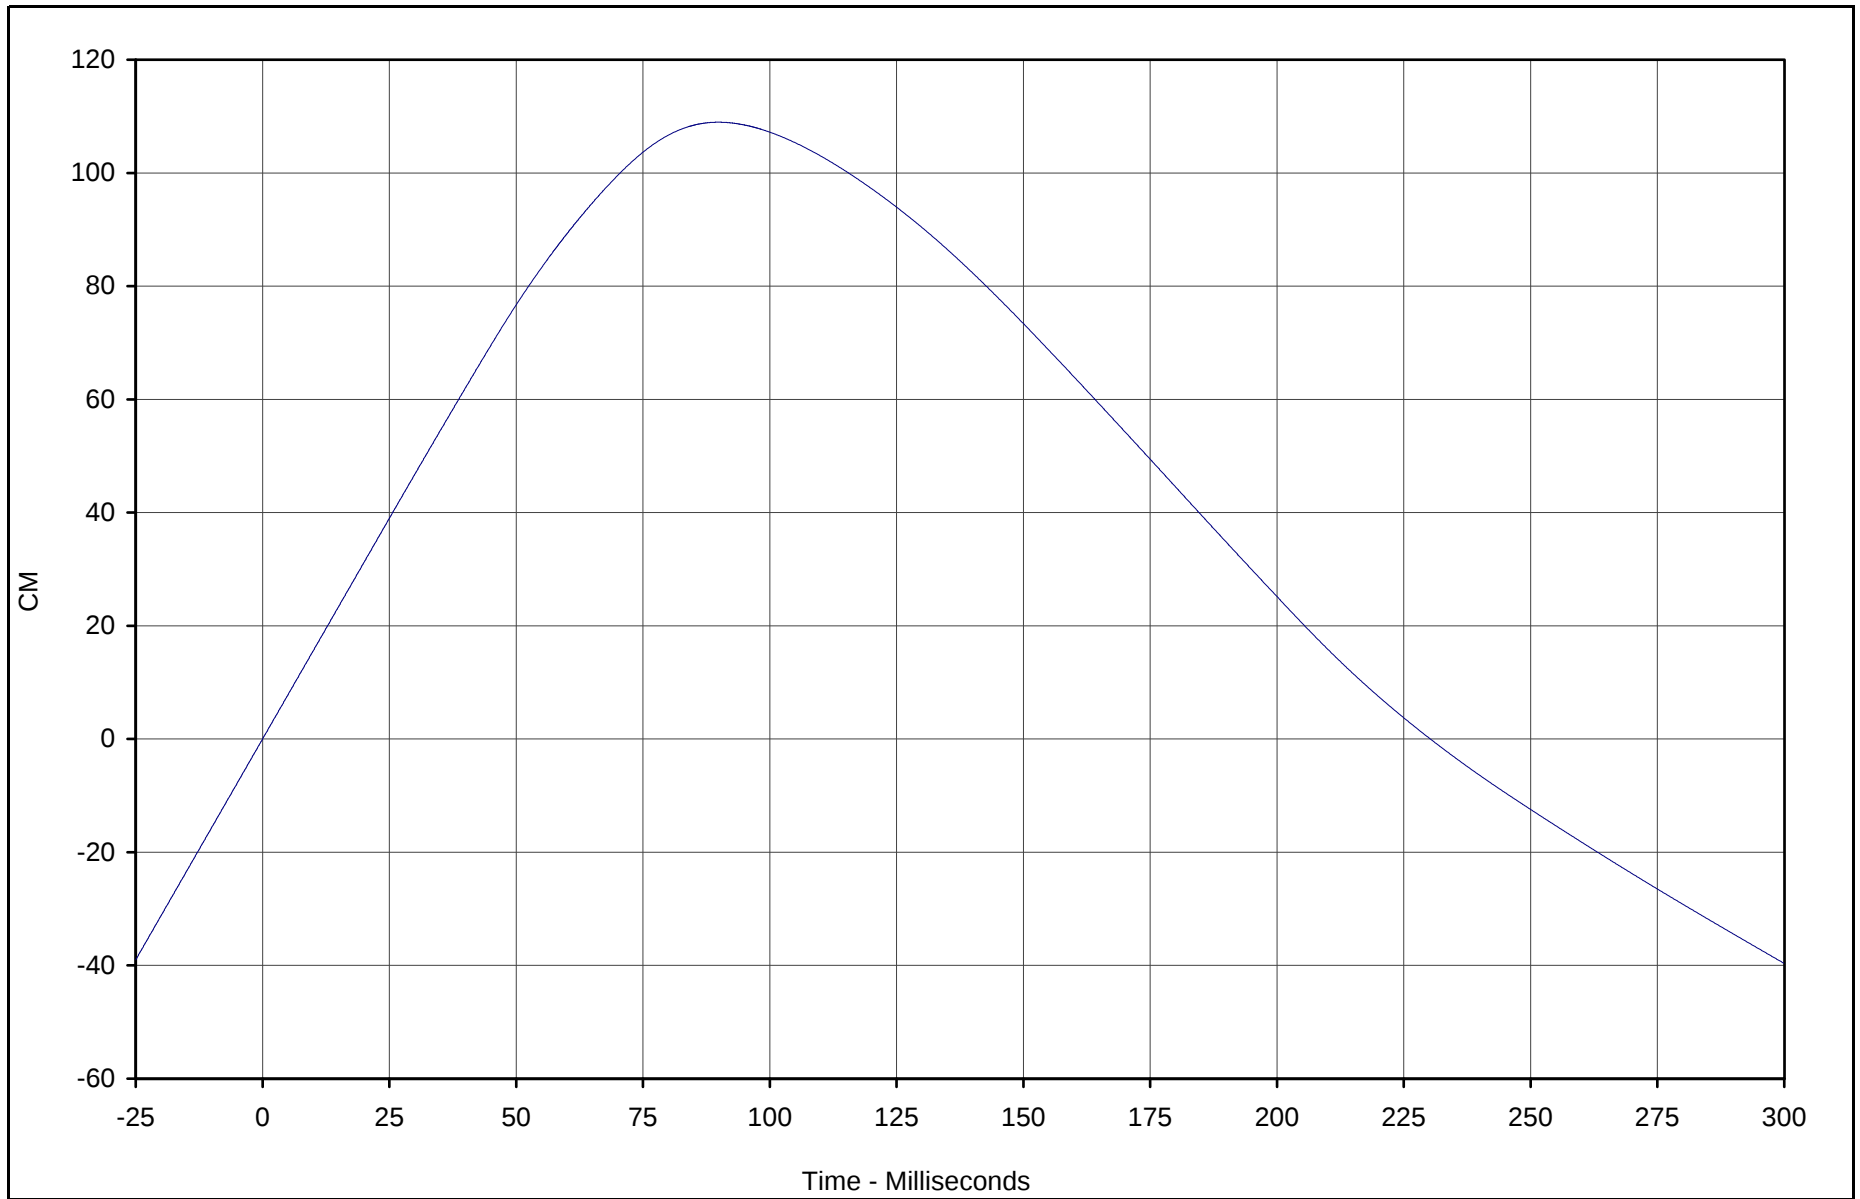

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Head Redundant X Displ.	004	IN2	CM	109.0	89.9	-39.6	299.9	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

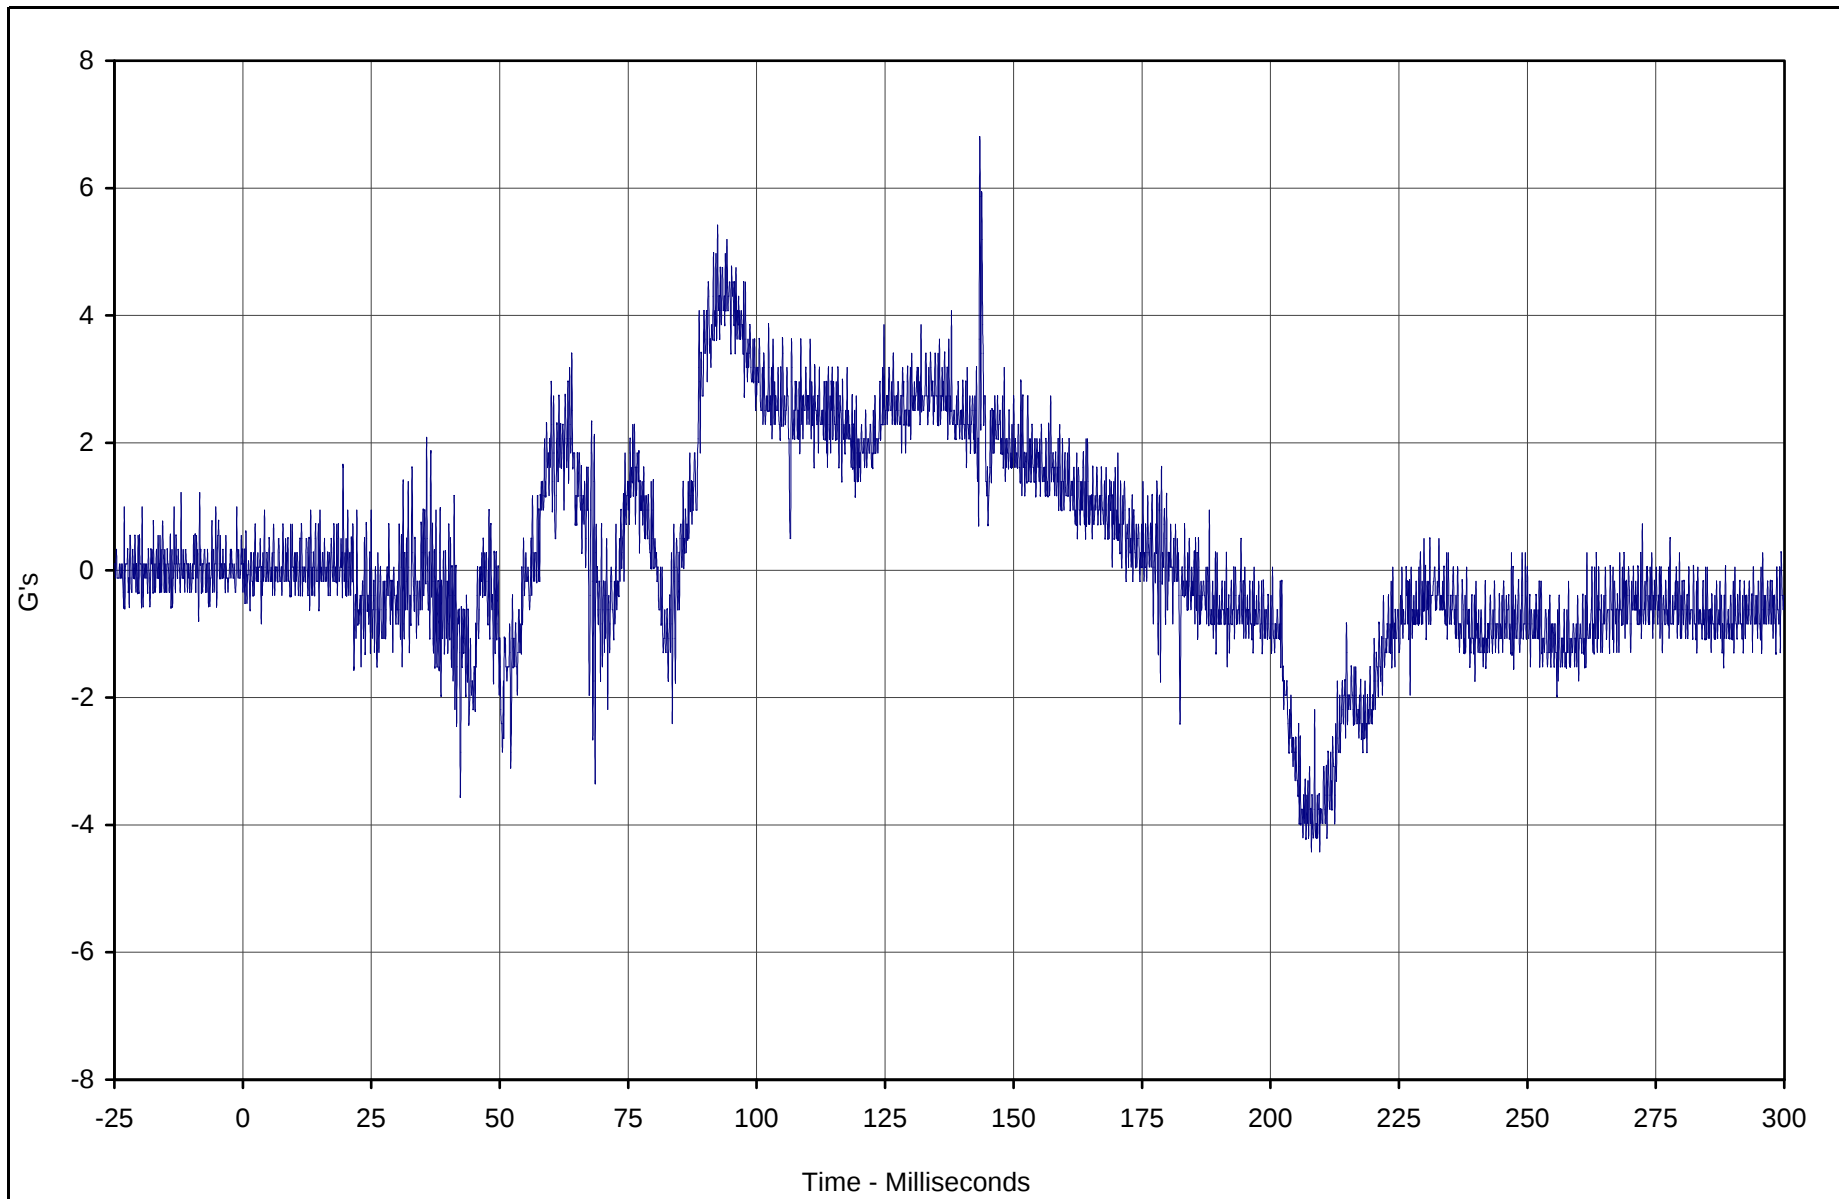

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Head Redundant Y	005	FIL	G's	6.8	143.4	-4.4	208.0	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

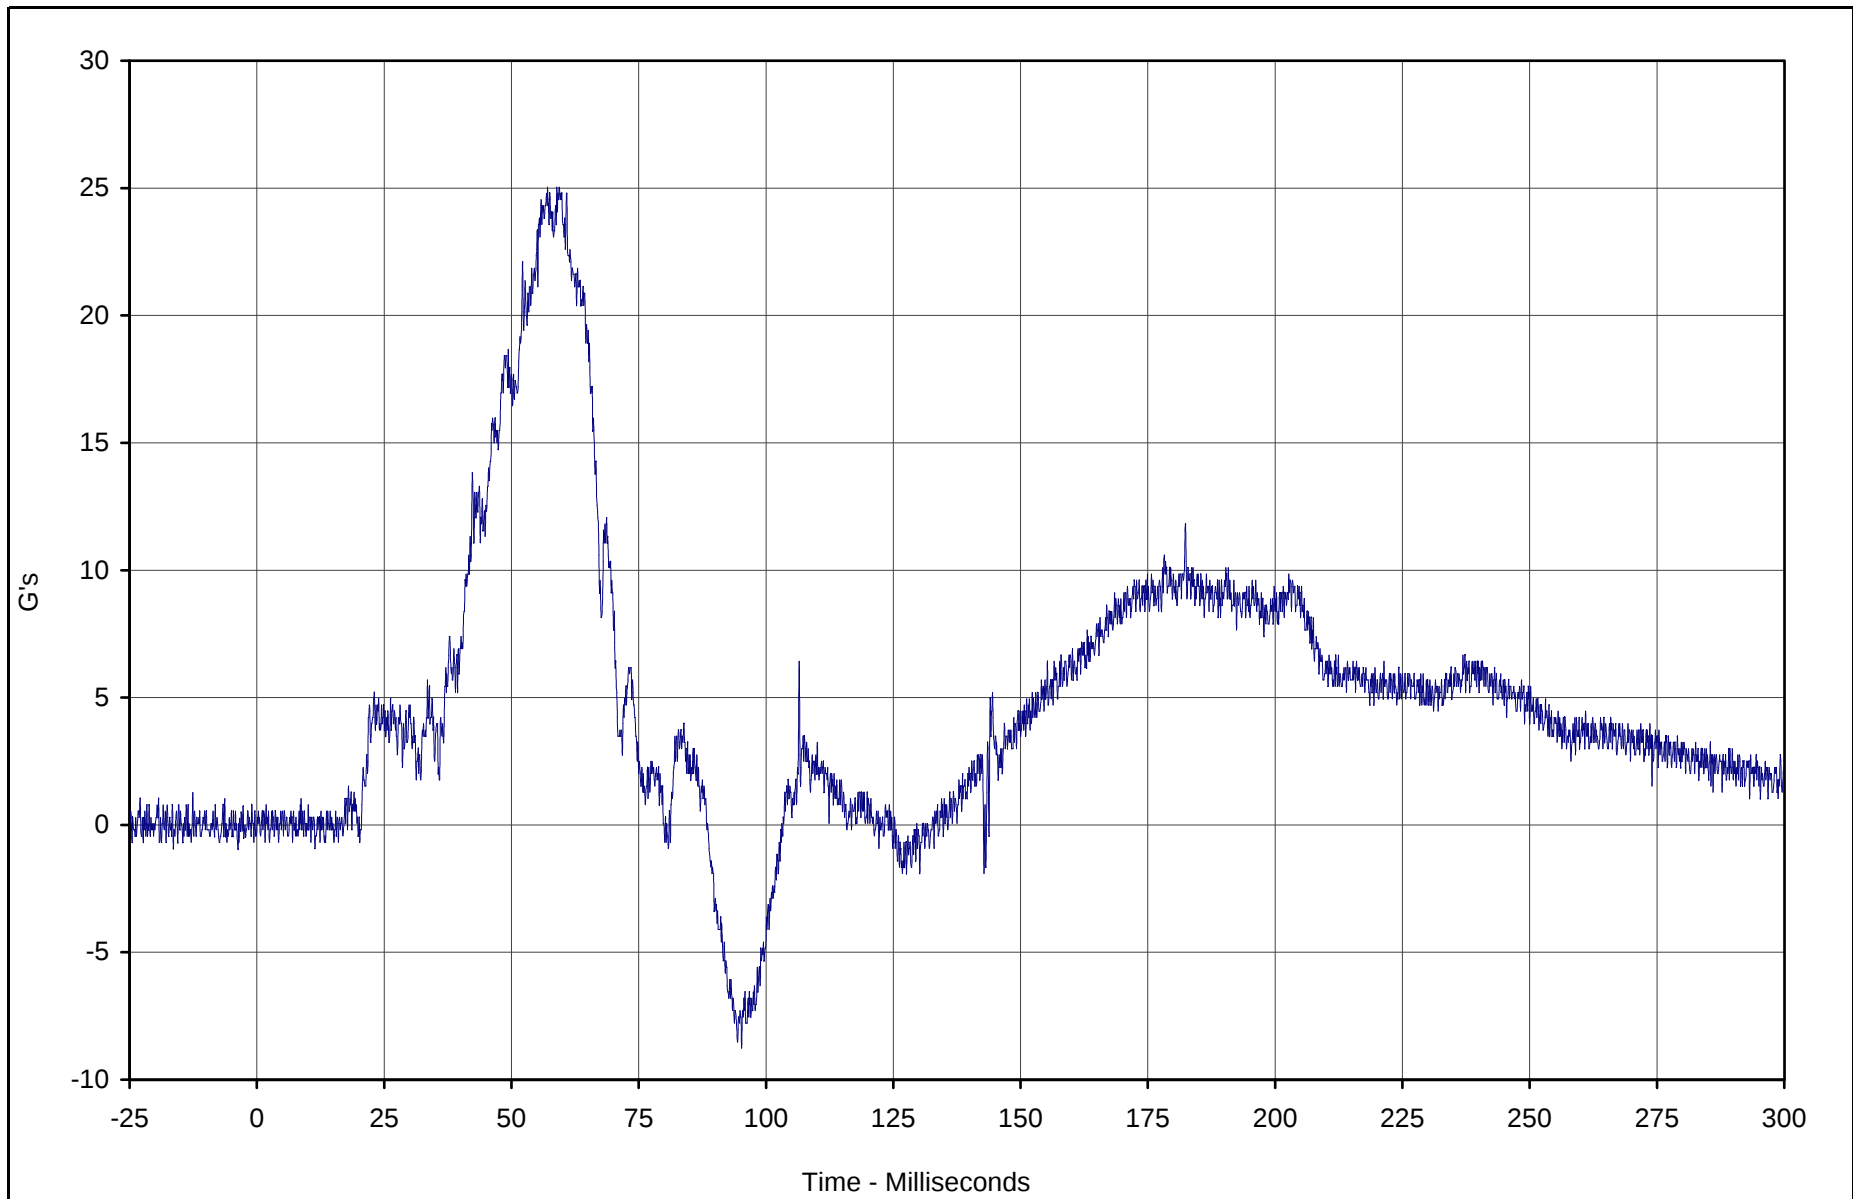

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Head Redundant Z	006	FIL	G's	25.0	57.1	-8.8	95.2	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

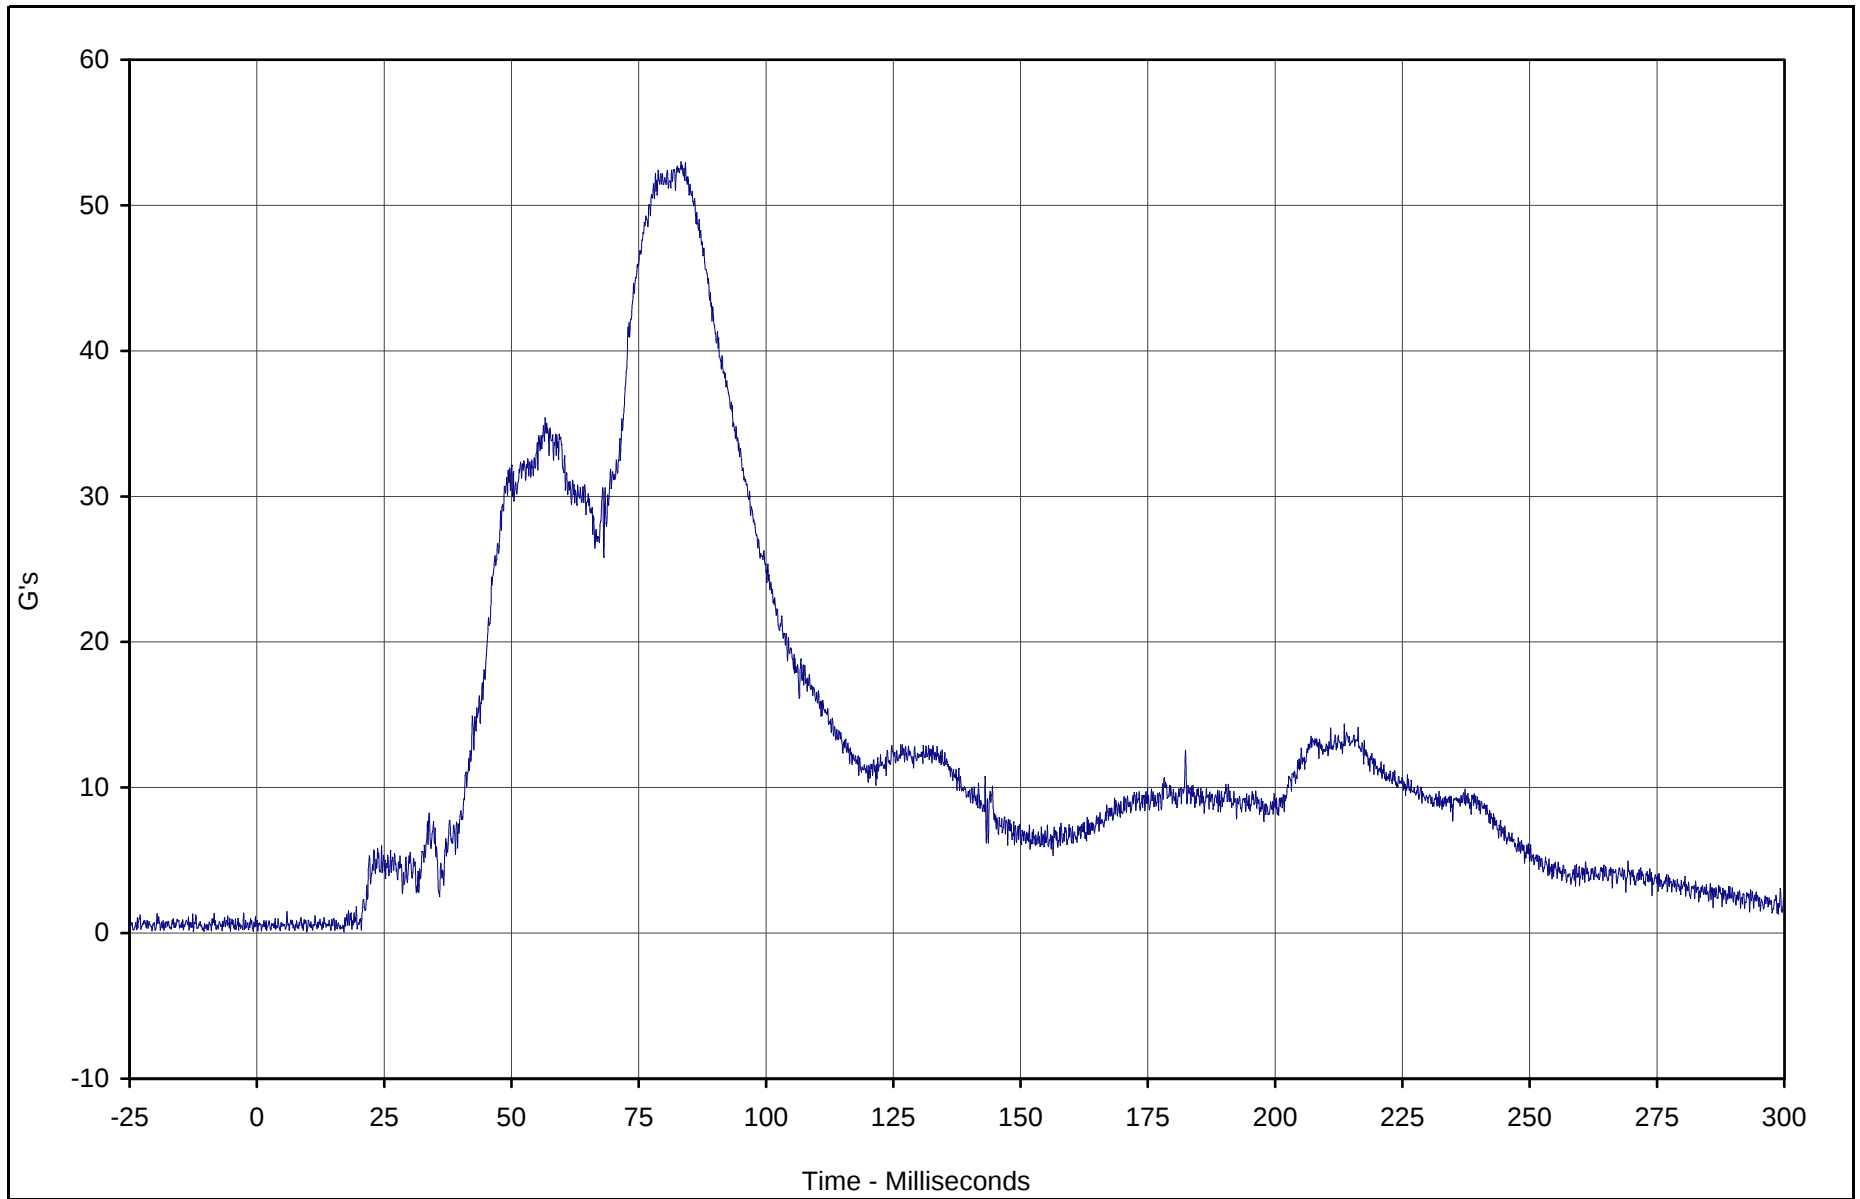

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Head Resultant Redundant	004	RES	G's	53.0	83.3	0.1	9.8	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

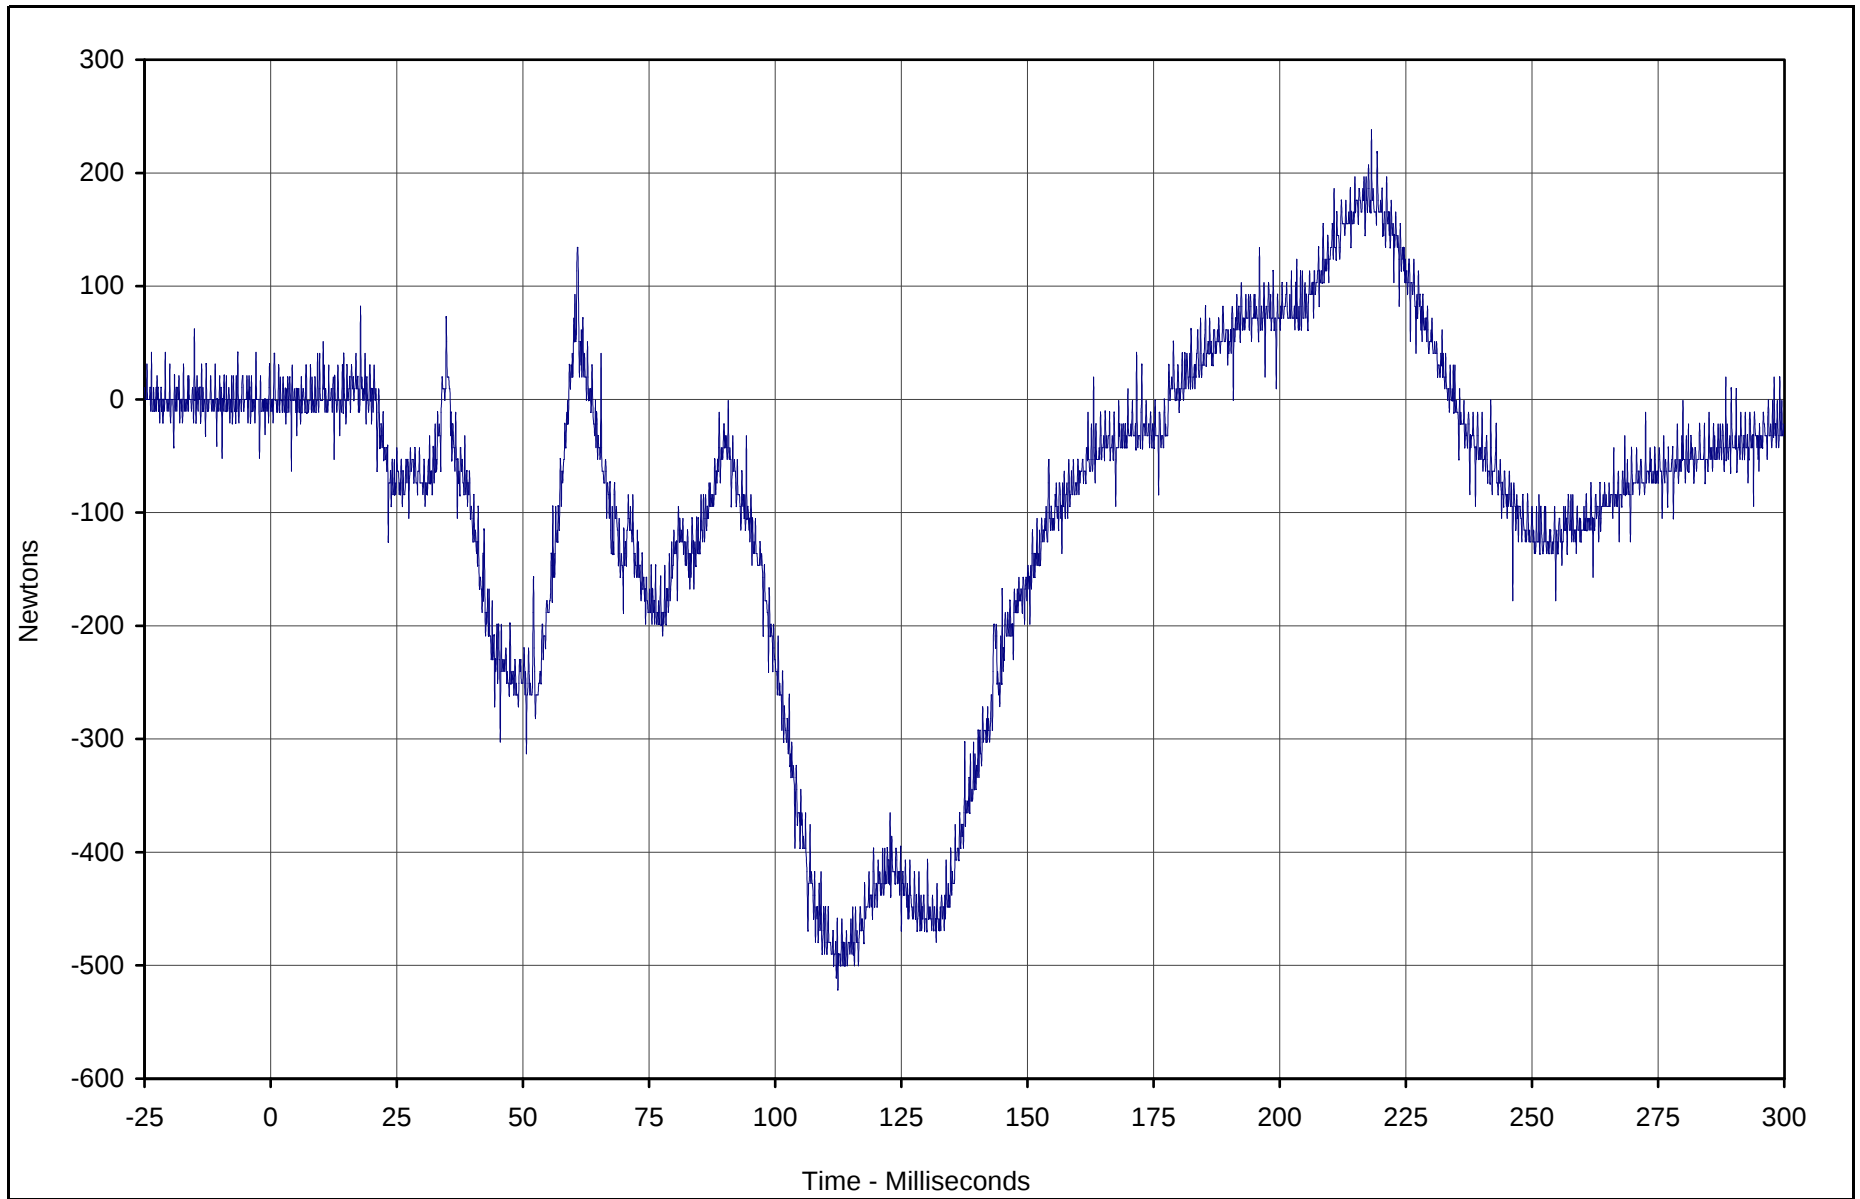

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Neck Force X	007	FIL	Newtons	238.3	218.2	-521.3	112.4	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

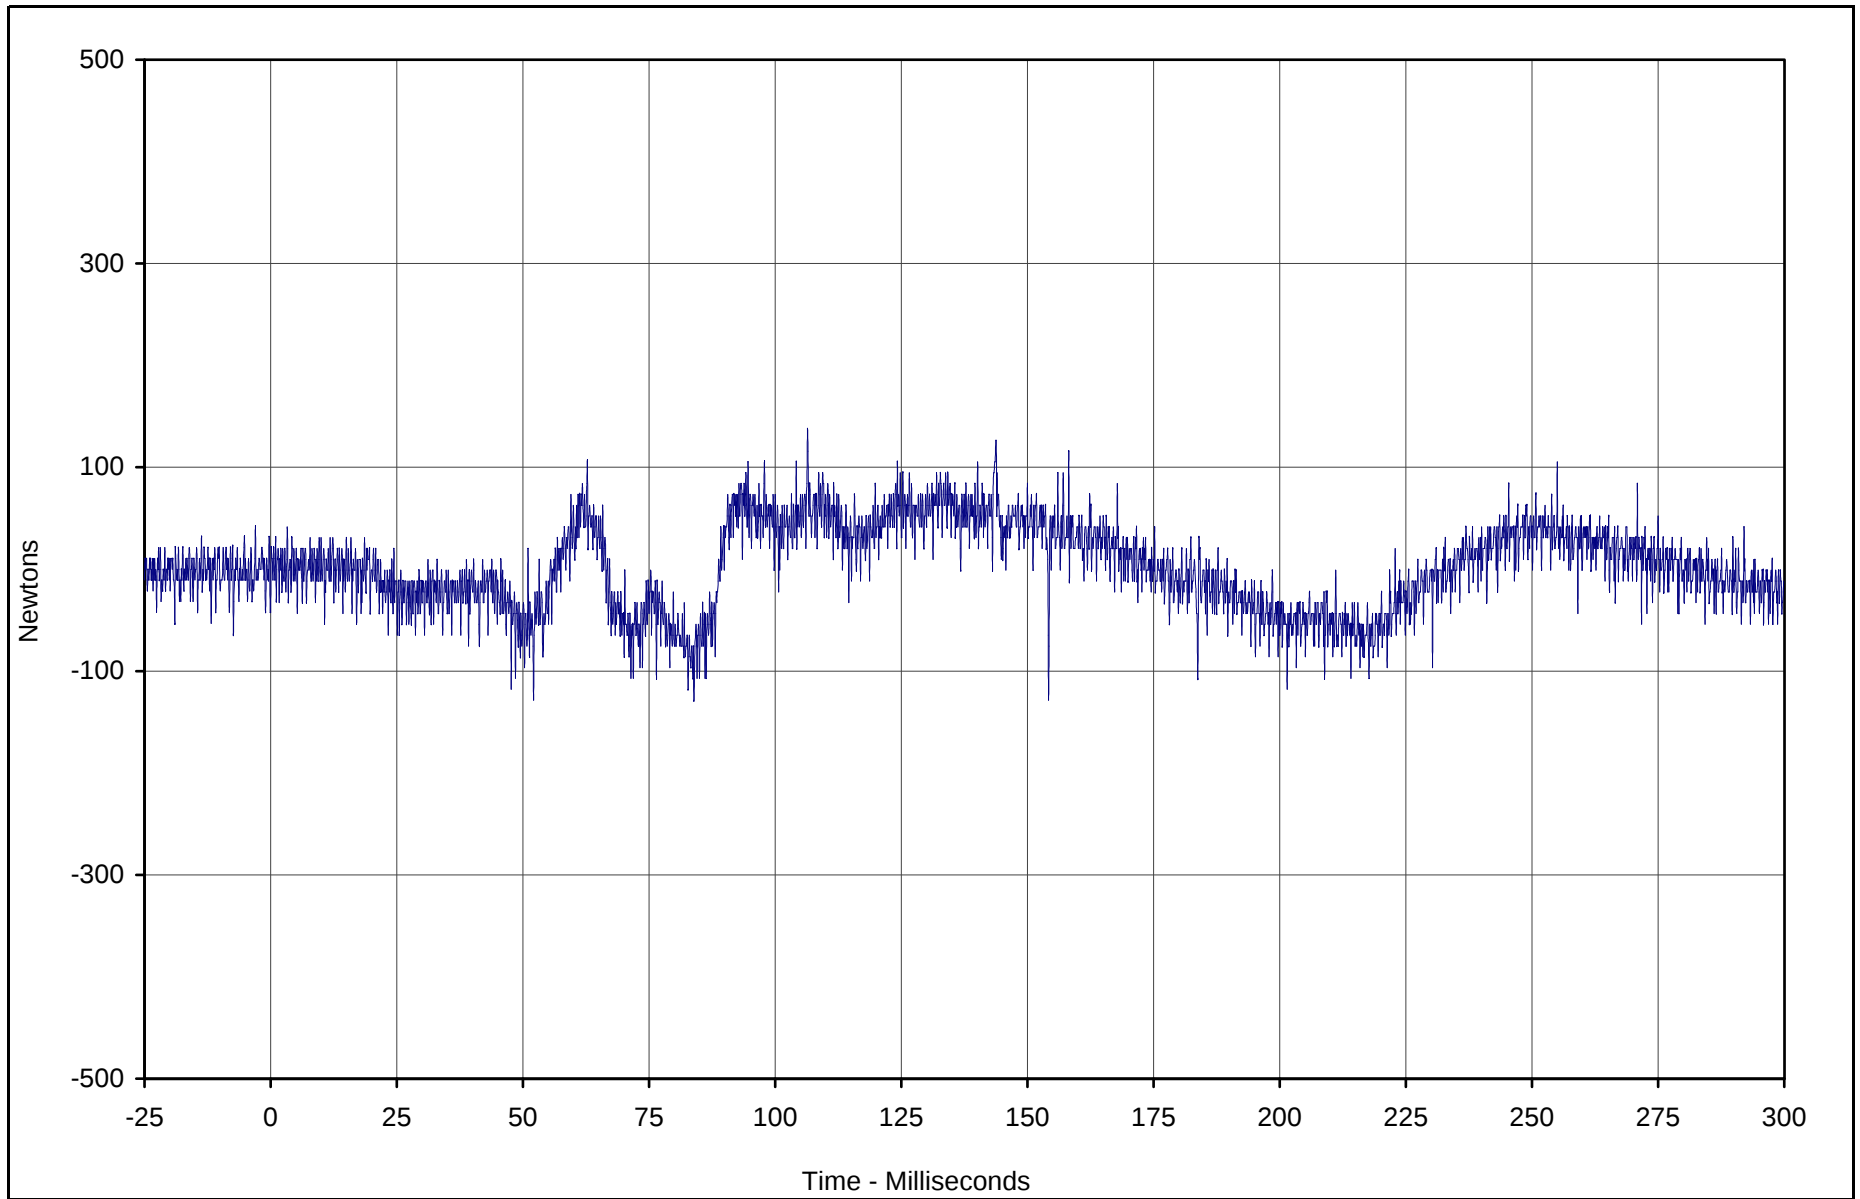

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Neck Force Y	008	FIL	Newtons	137.2	106.4	-128.6	52.1	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

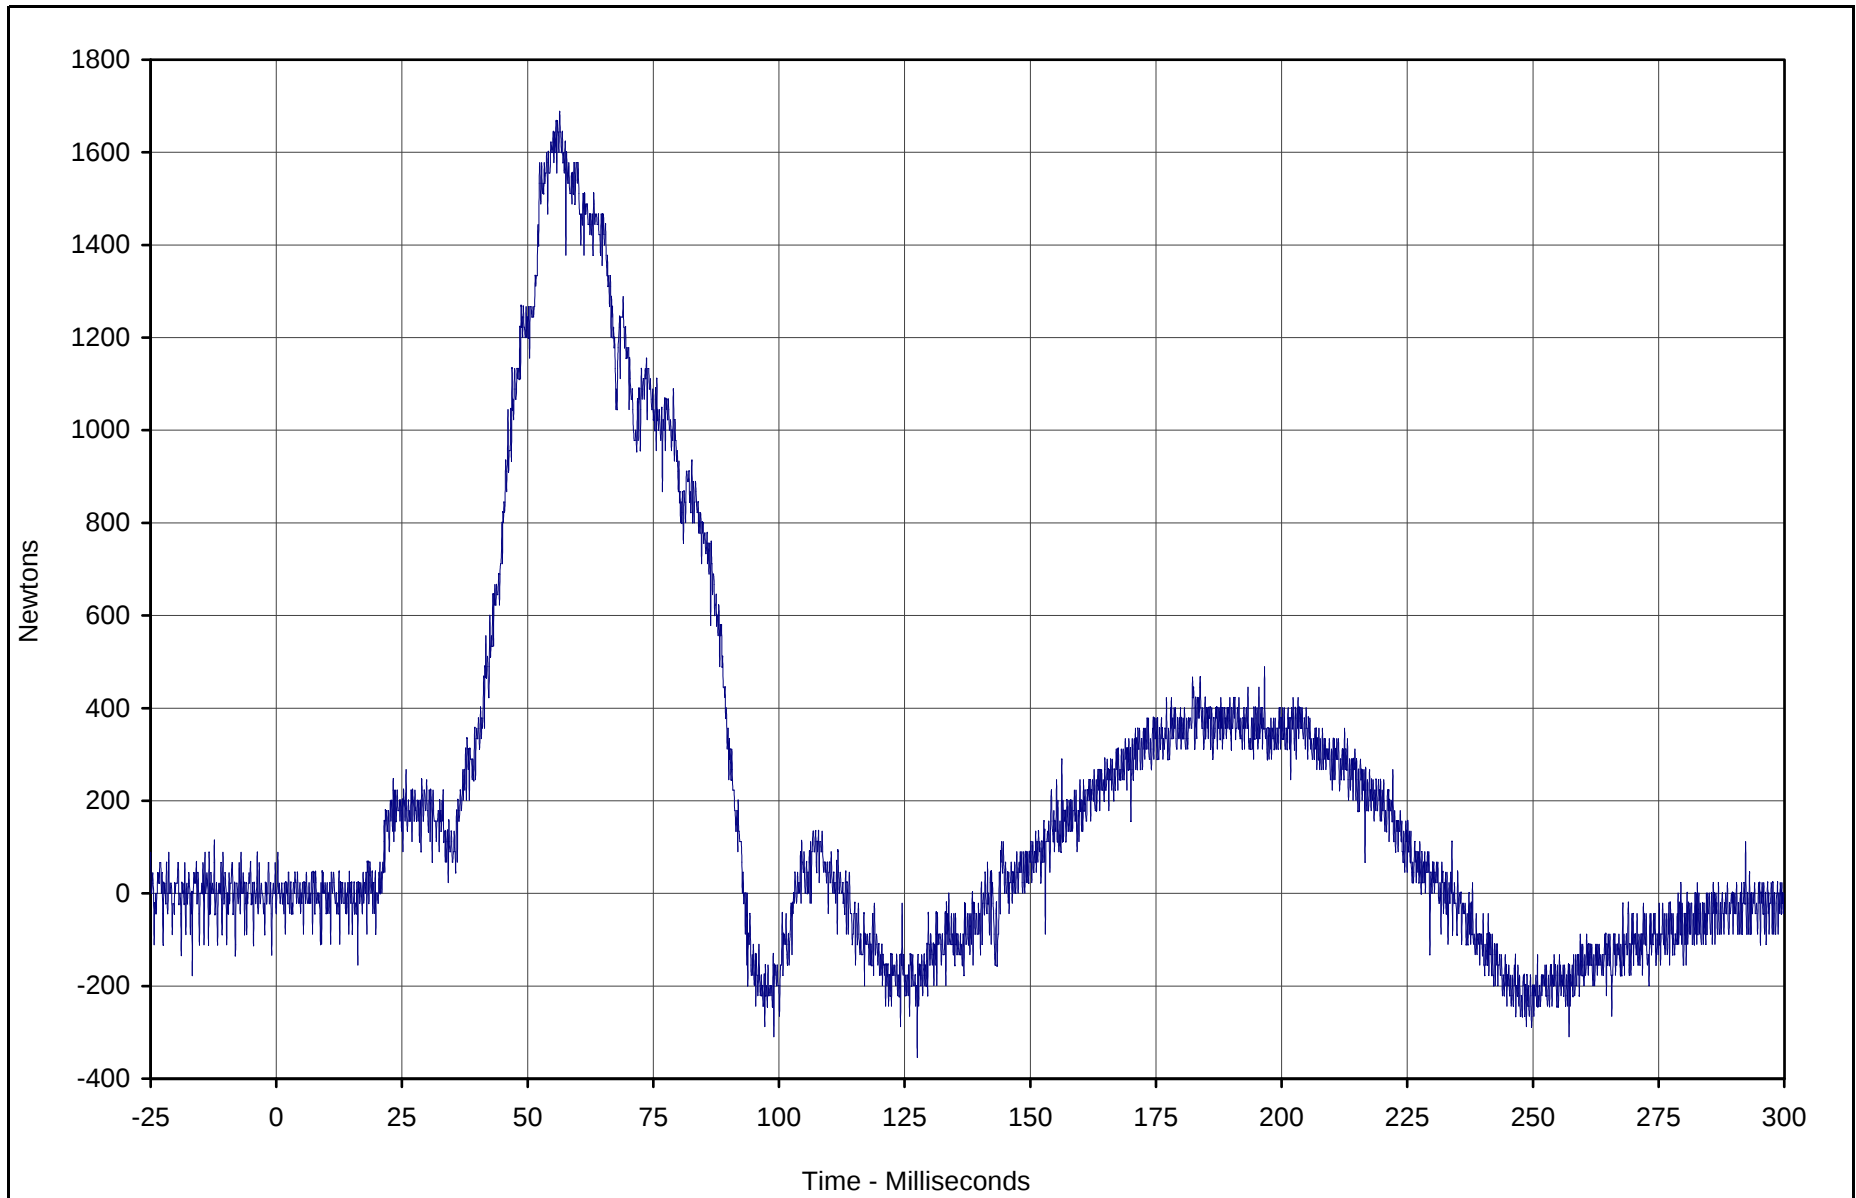

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Neck Force Z	009	FIL	Newtons	1688.6	56.4	-354.3	127.5	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

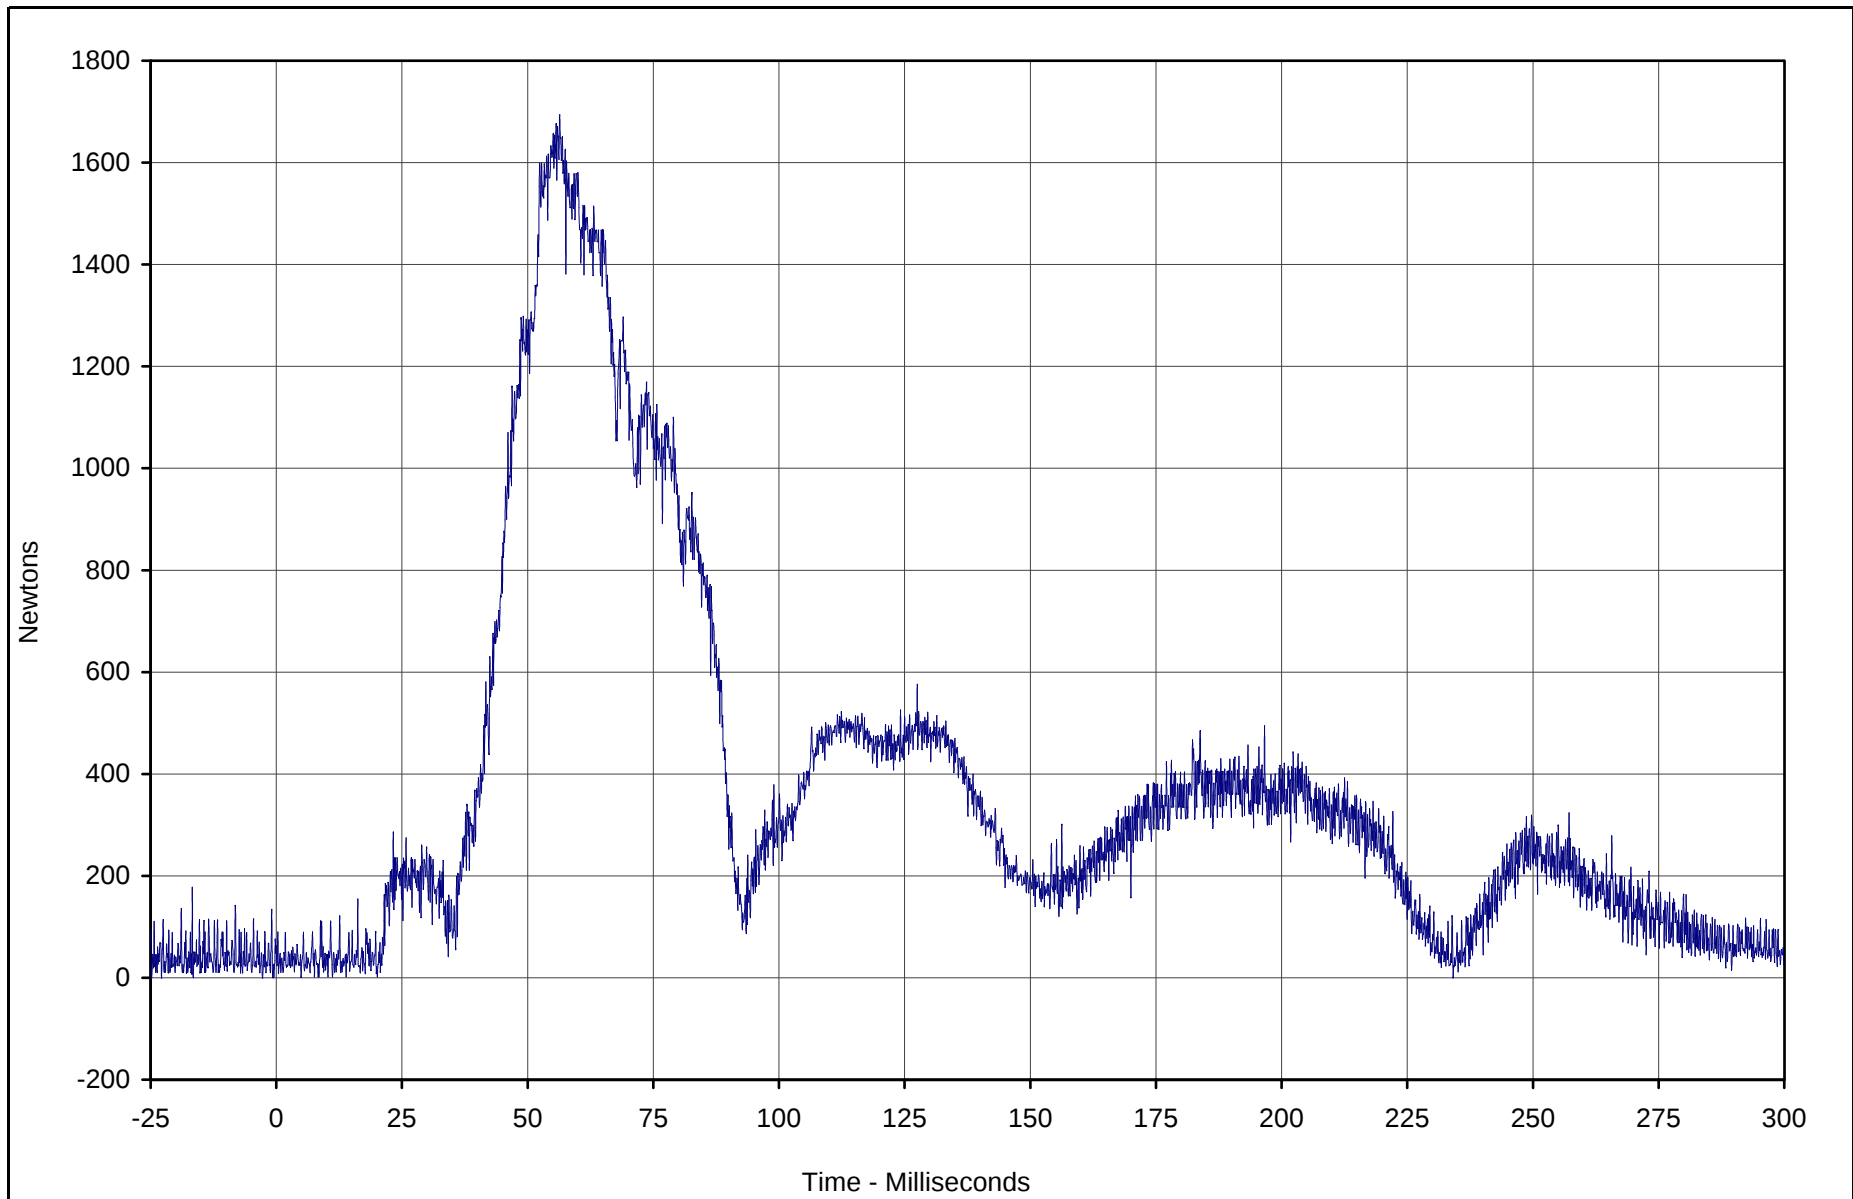

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Neck Force Resultant	007	RES	Newtons	1694.3	56.4	1.7	4.9	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

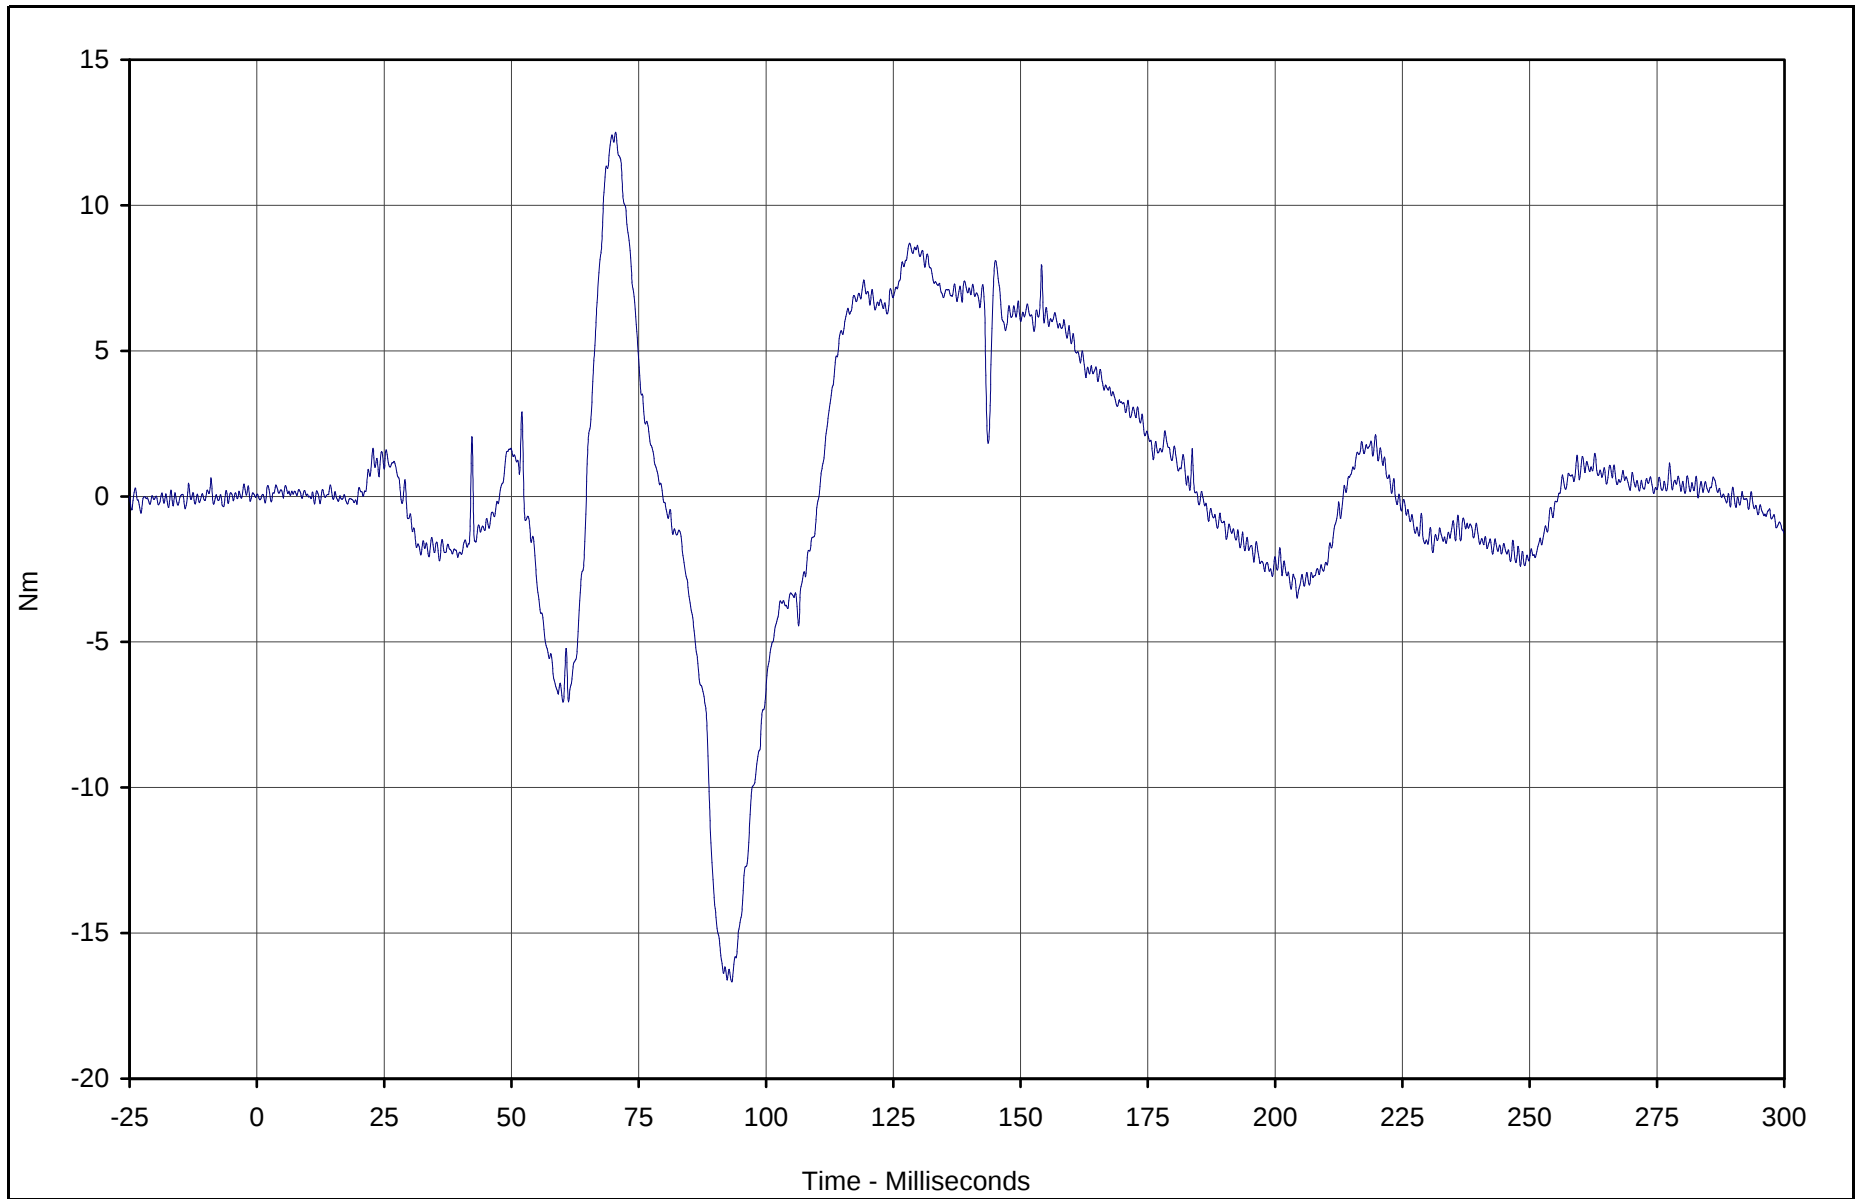

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Neck Moment X	010	FIL	Nm	12.5	70.5	-16.7	93.3	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

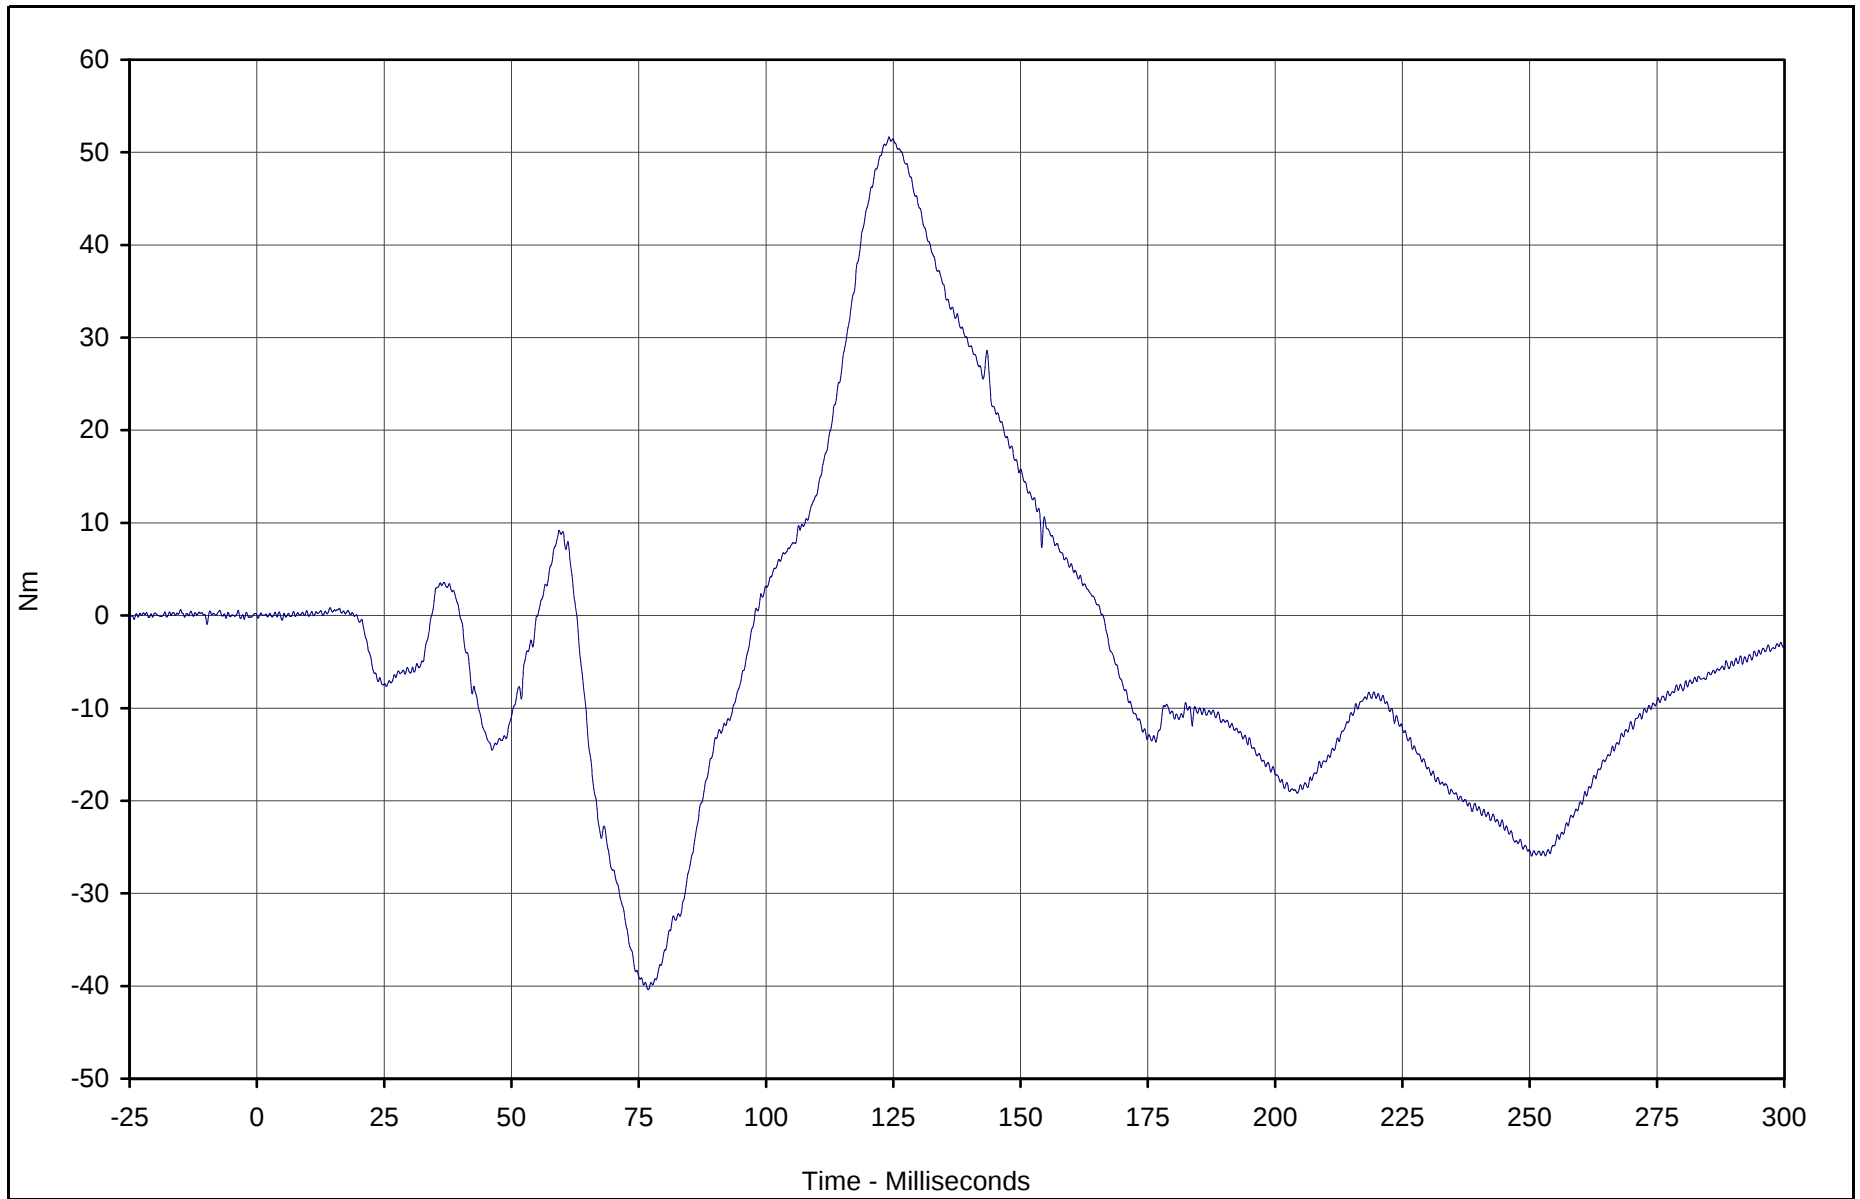

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Neck Moment Y	011	FIL	Nm	51.7	124.2	-40.4	76.8	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

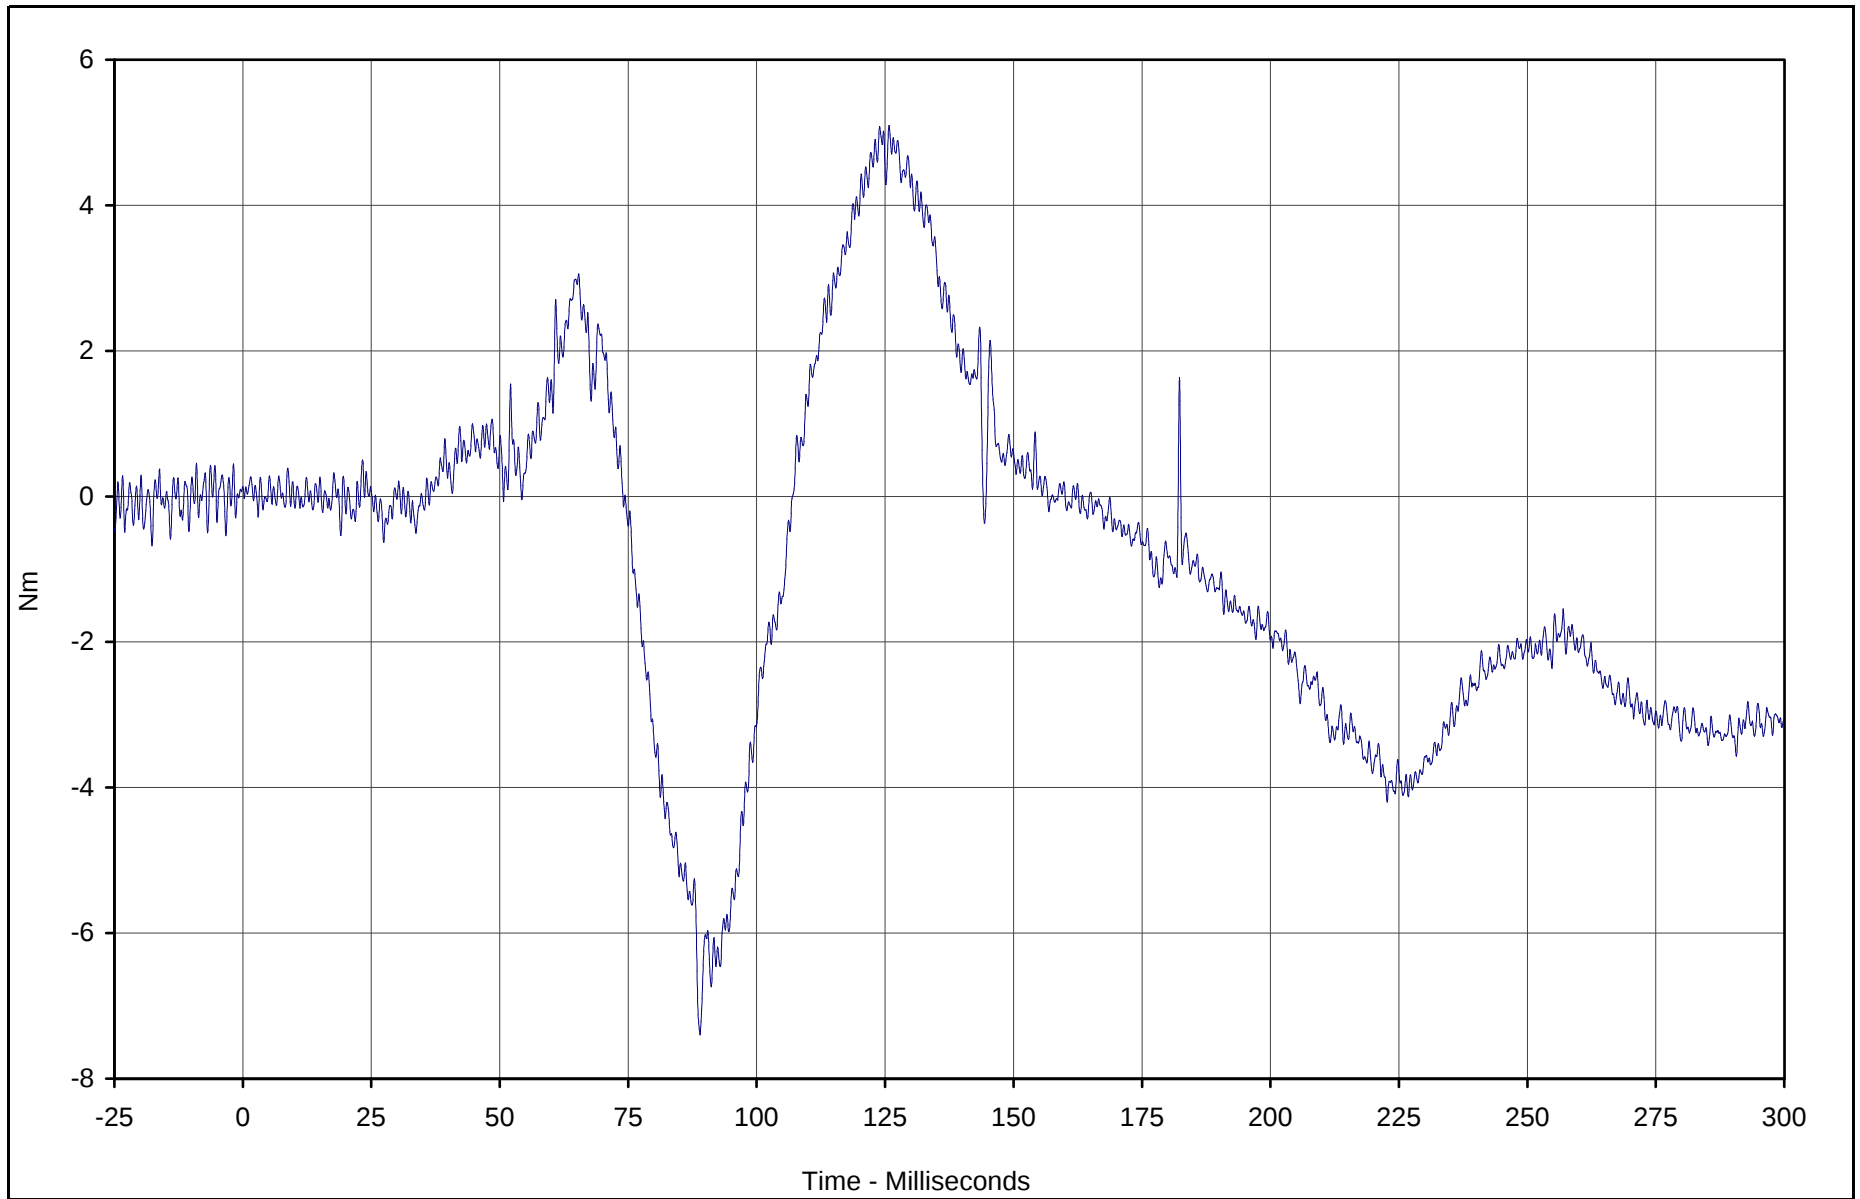

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Neck Moment Z	012	FIL	Nm	5.1	125.8	-7.4	89.0	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

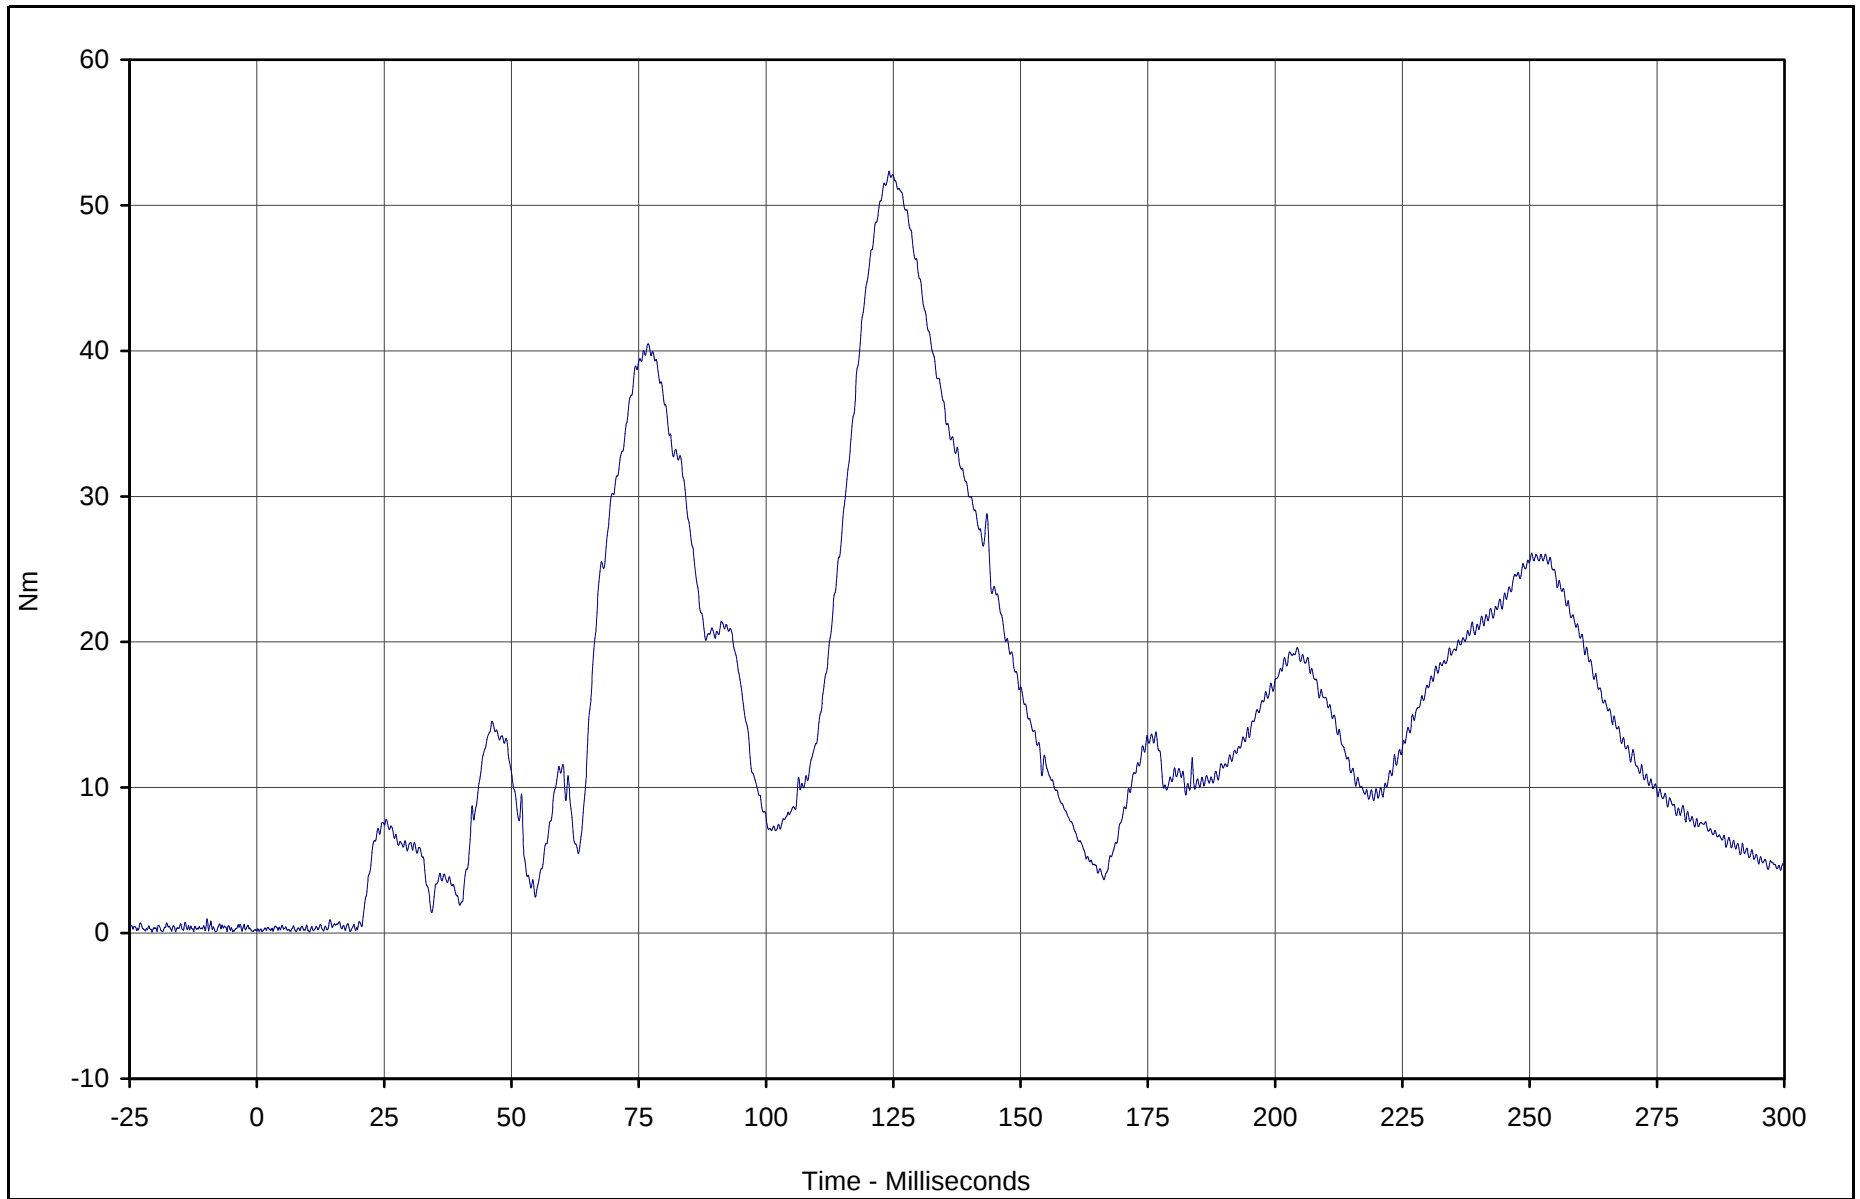

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Neck Moment Resultant	010	RES	Nm	52.3	124.2	0.1	10.3	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

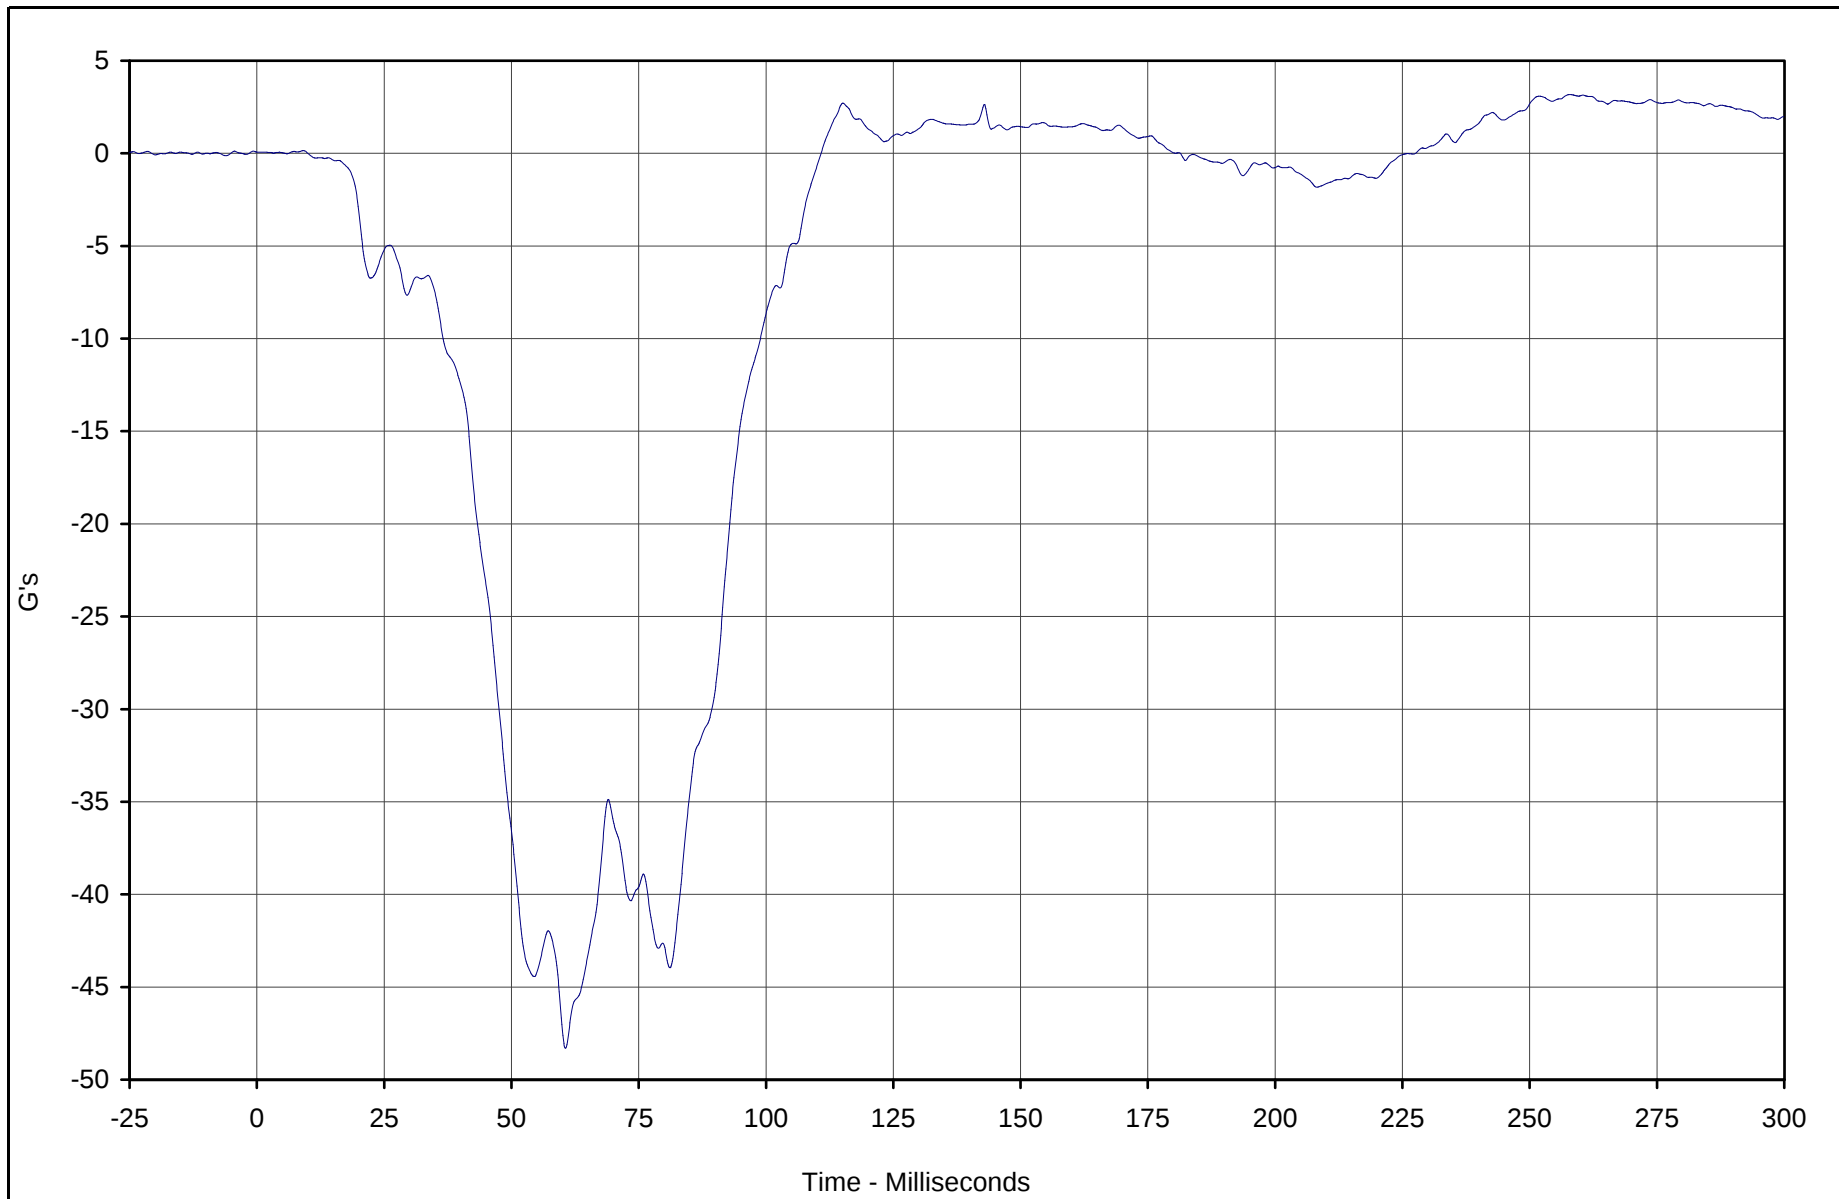

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Chest Primary X	013	FIL	G's	3.2	257.9	-48.3	60.6	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

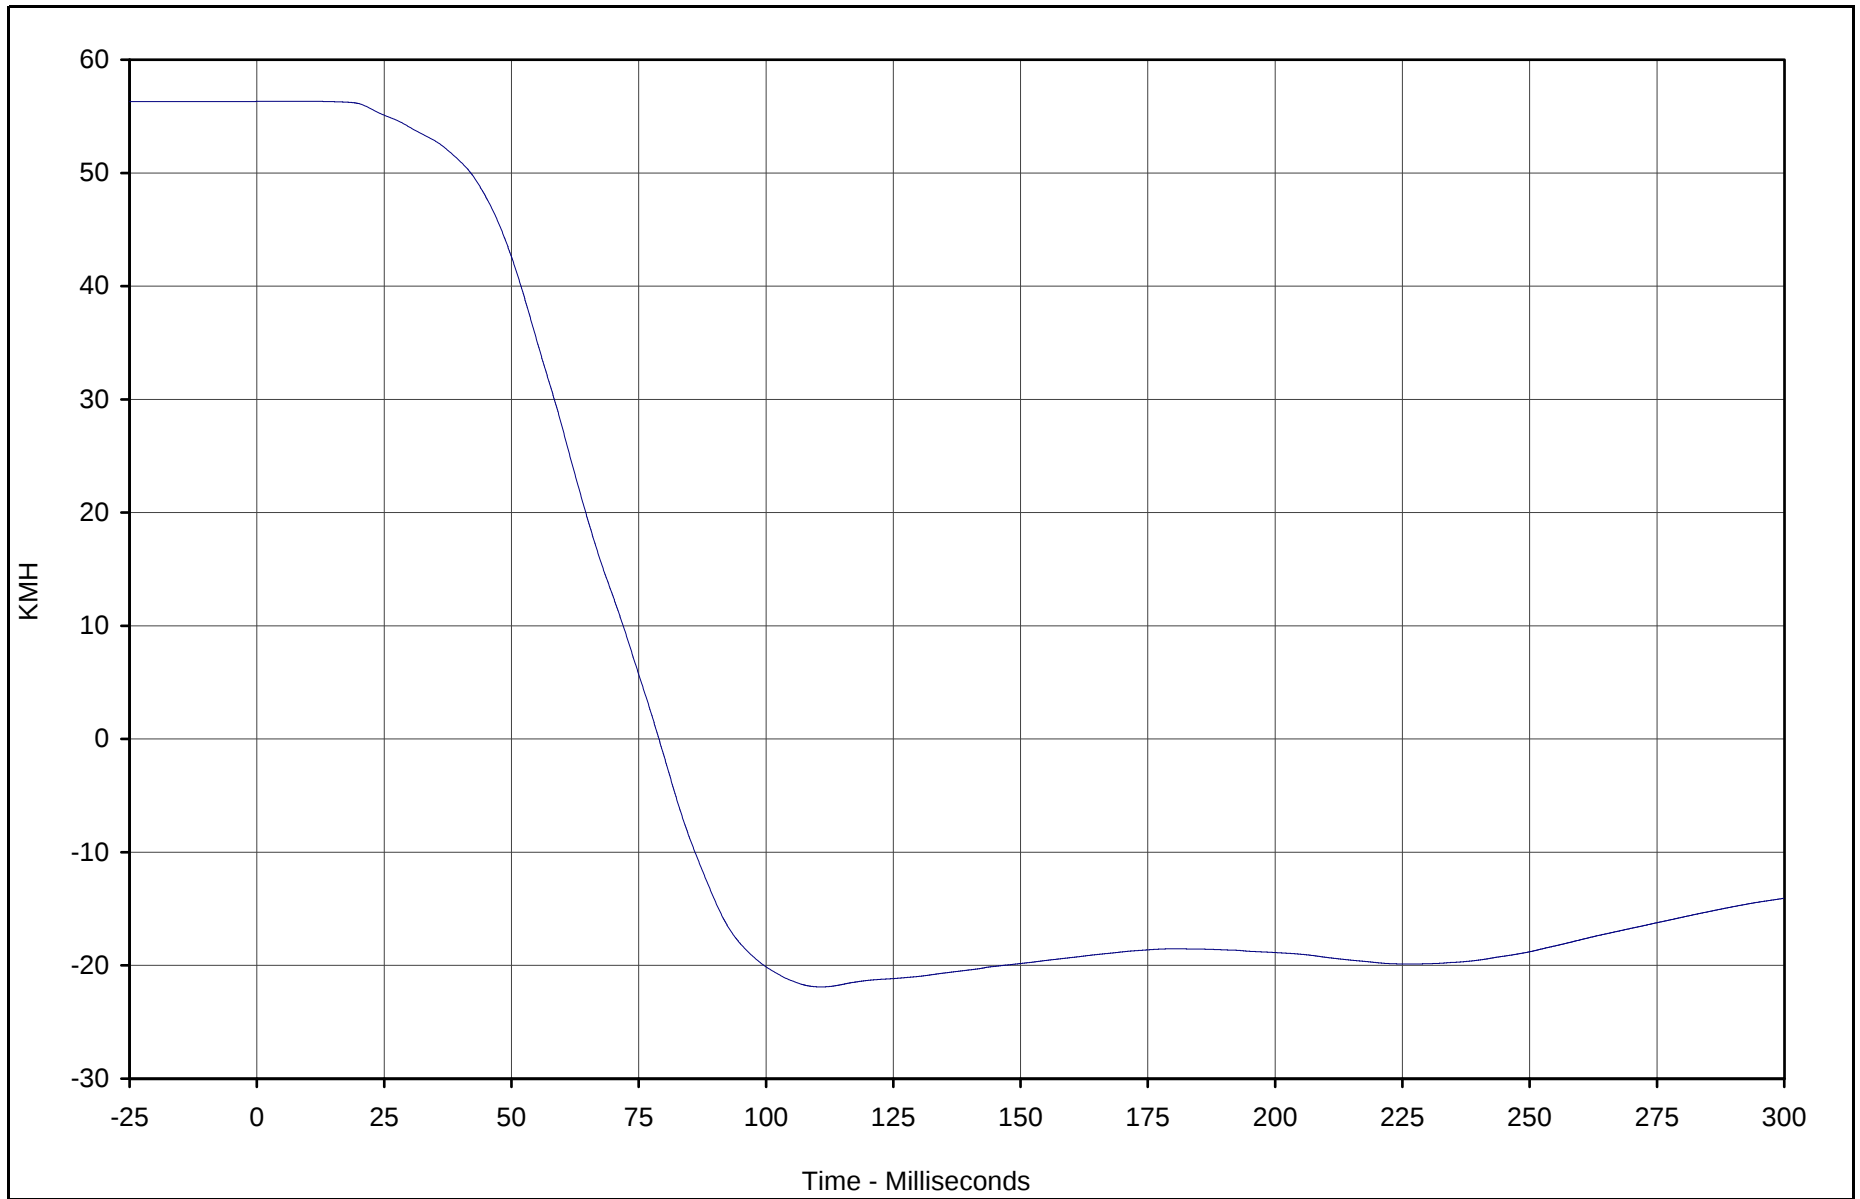

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Chest Primary X Velocity	013	IN1	KMH	56.3	10.0	-21.9	110.8	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

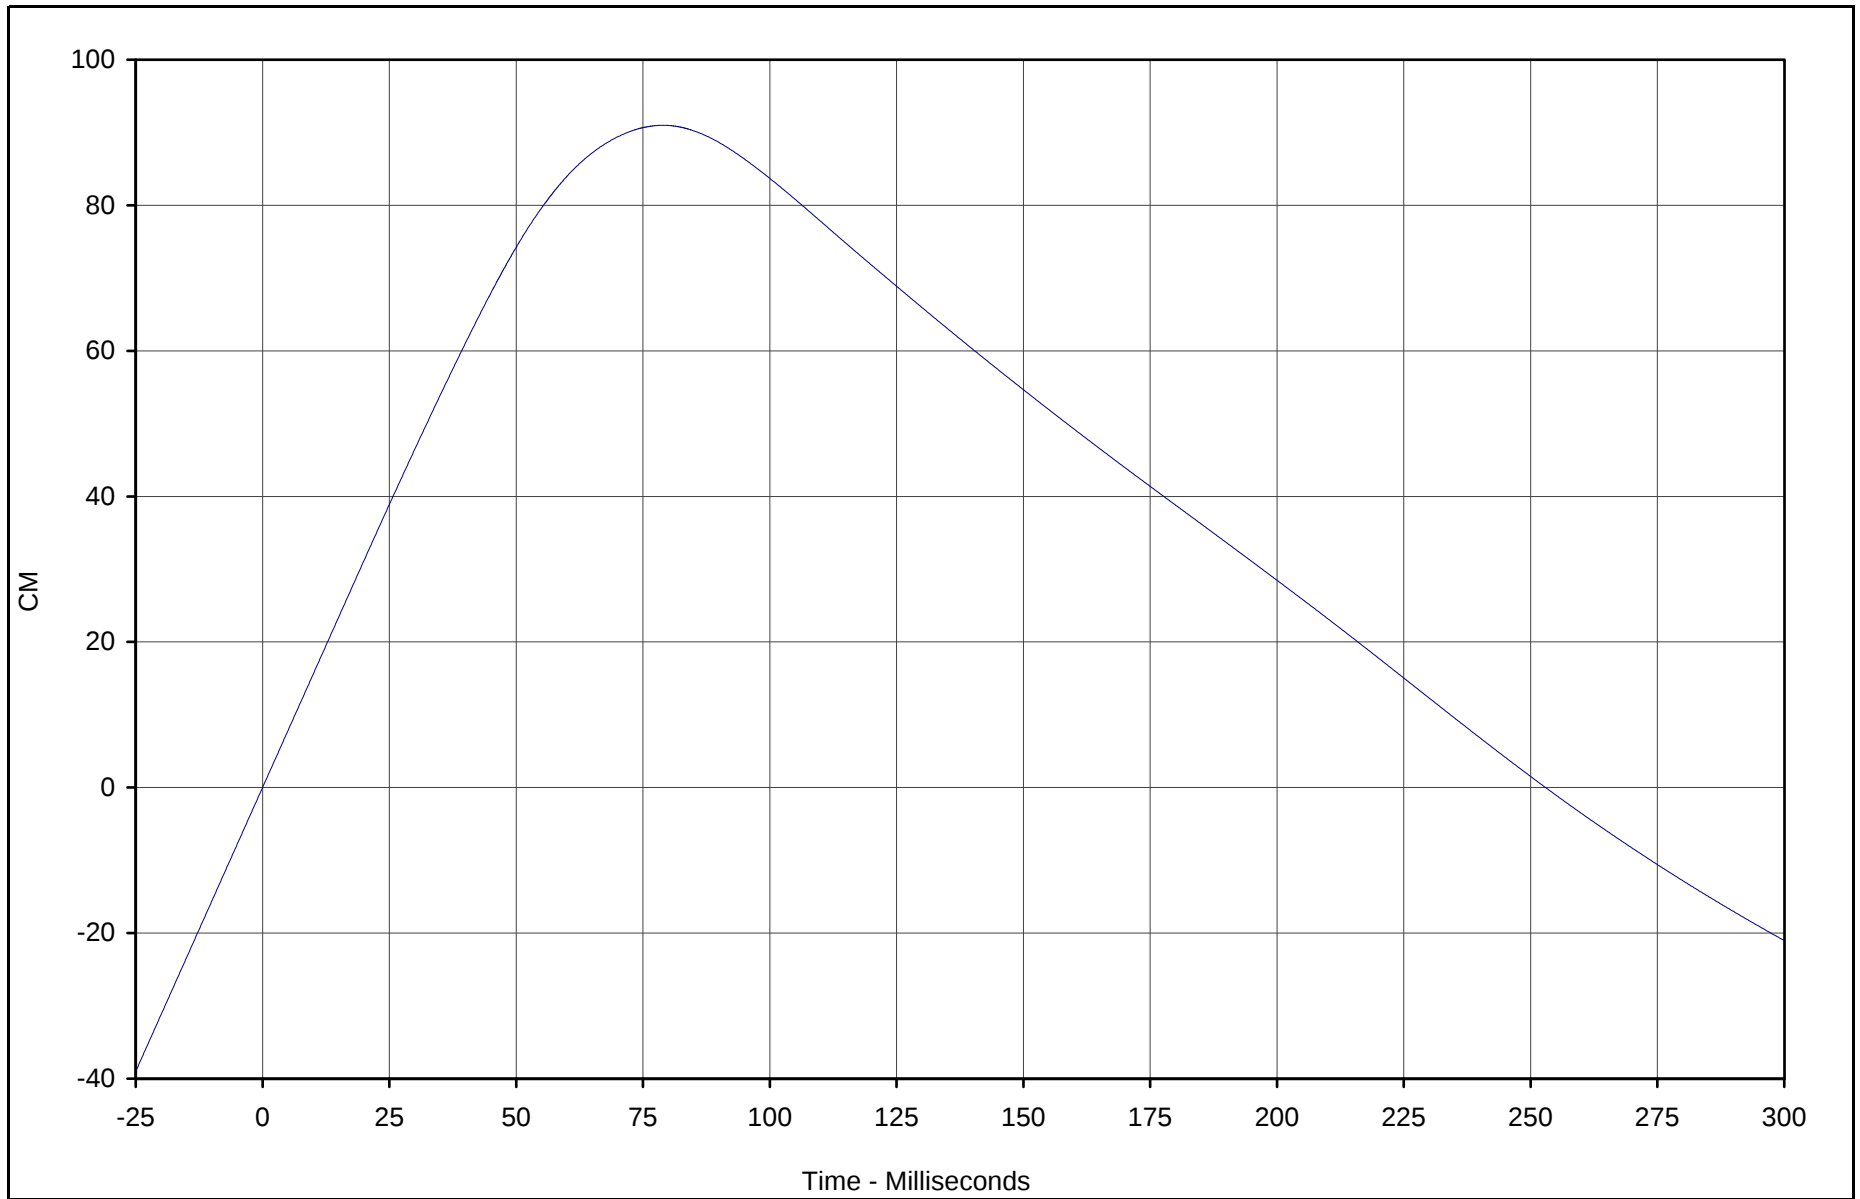

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Chest Primary X Displ.	013	IN2	CM	91.0	79.0	-21.0	299.9	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

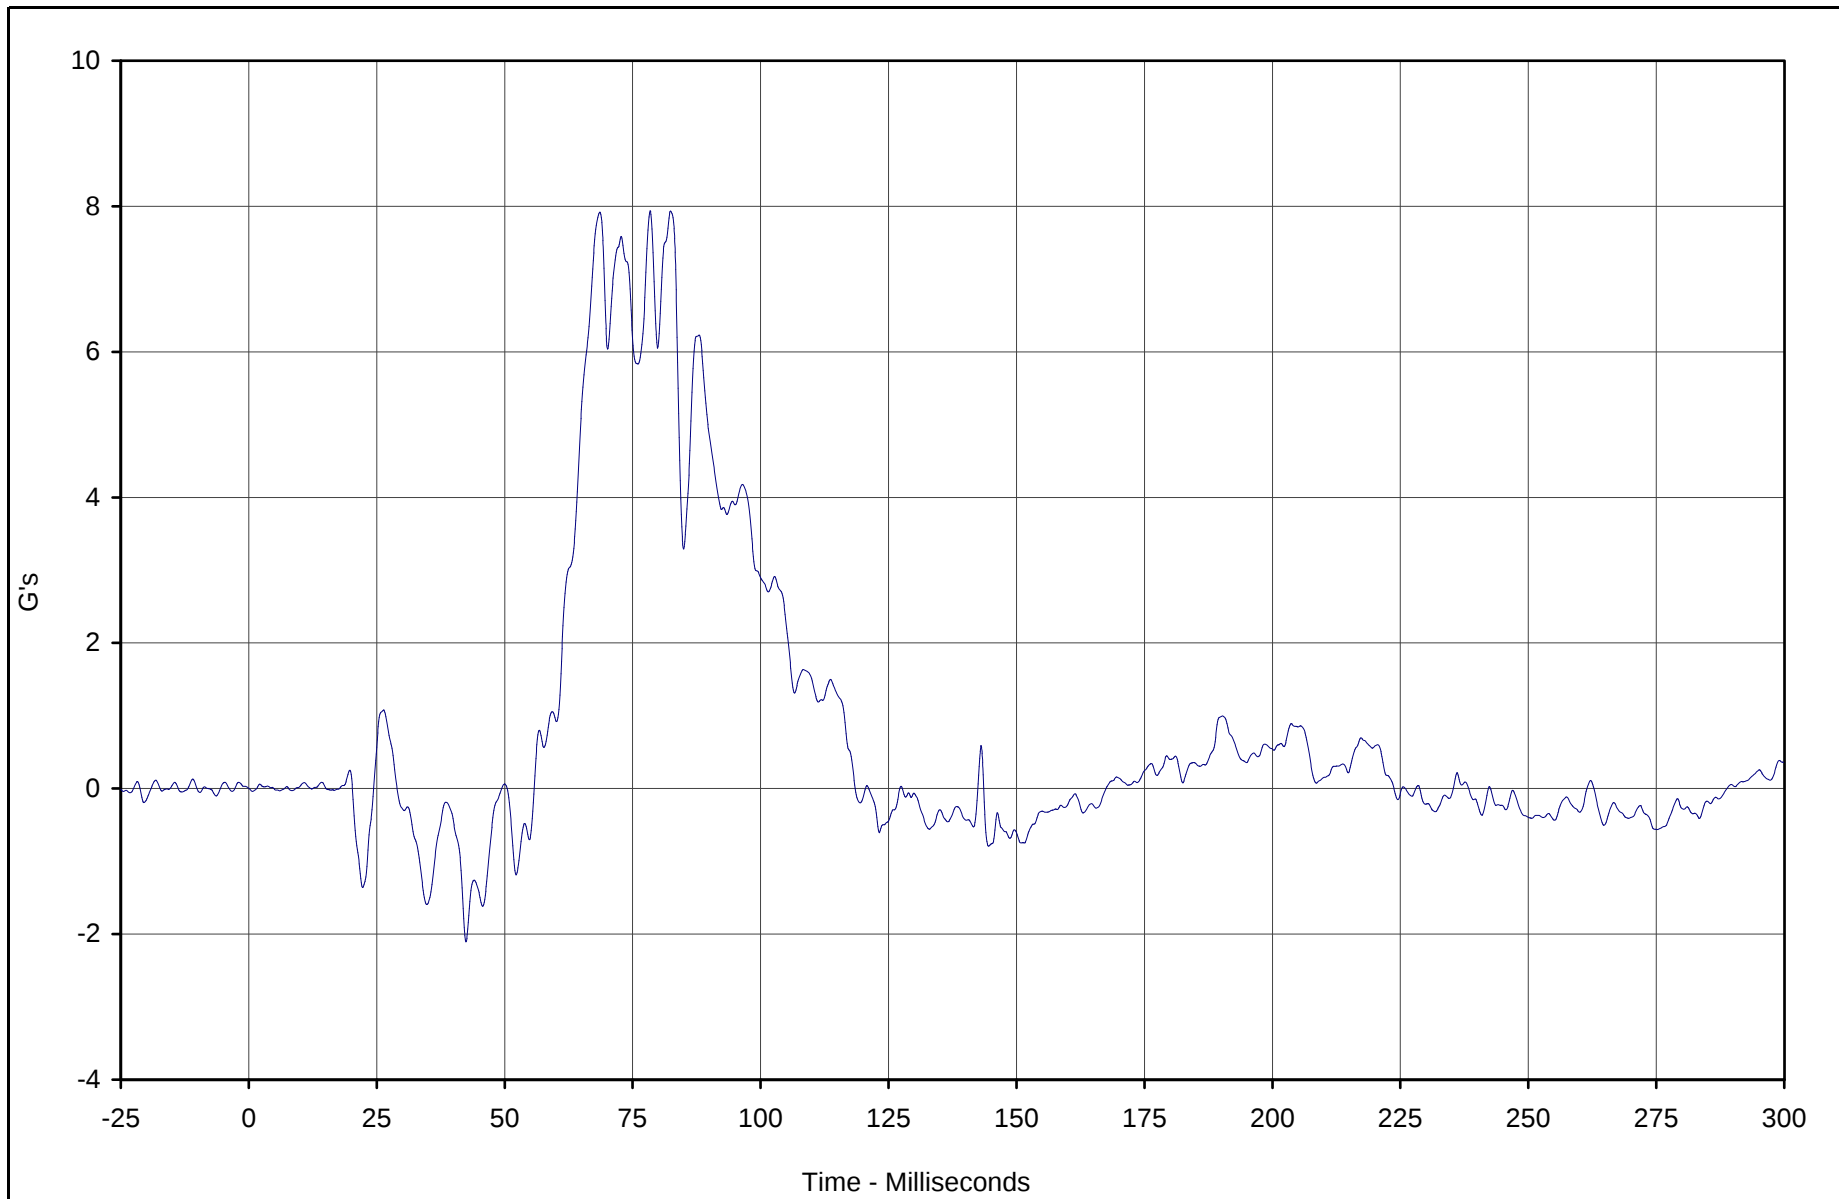

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Chest Primary Y	014	FIL	G's	7.9	78.4	-2.1	42.4	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

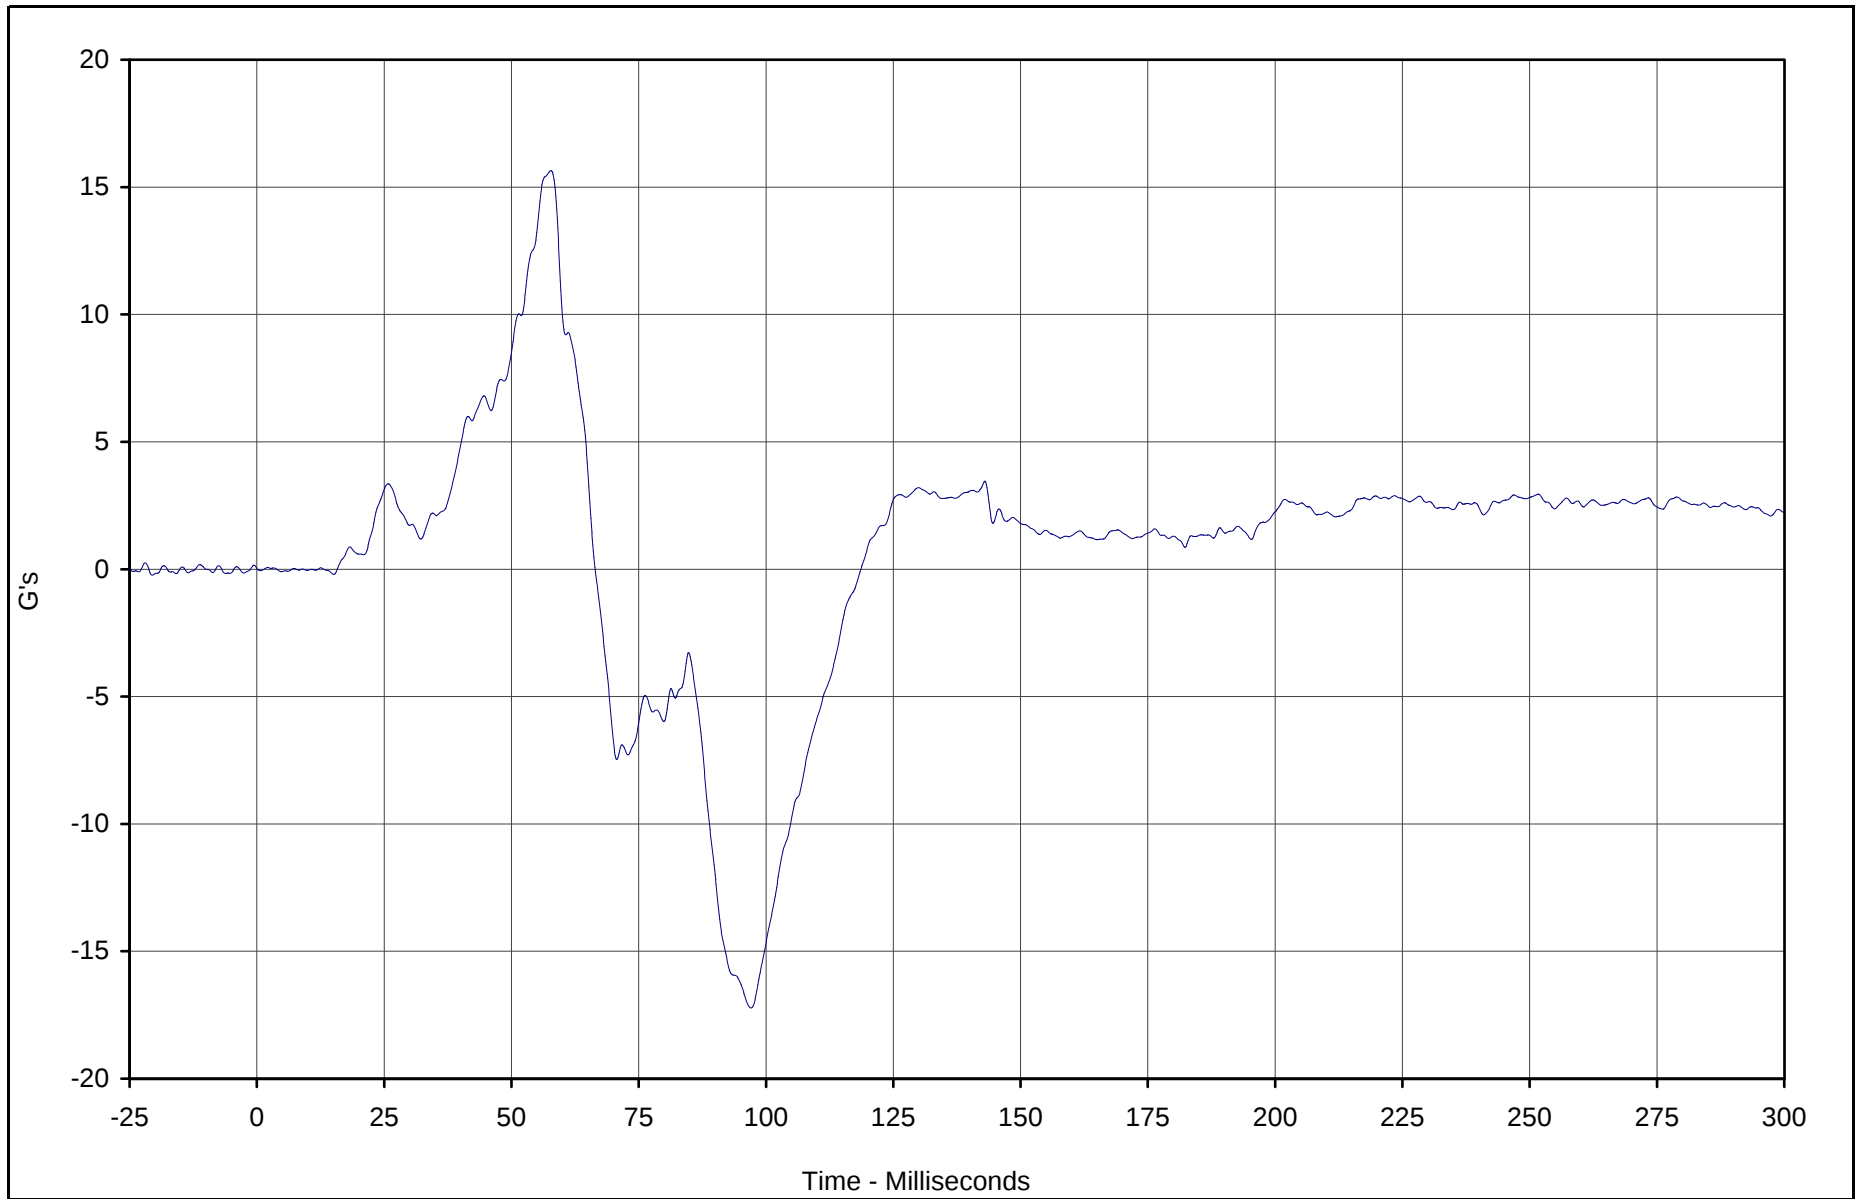

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Chest Primary Z	015	FIL	G's	15.6	57.8	-17.2	97.0	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

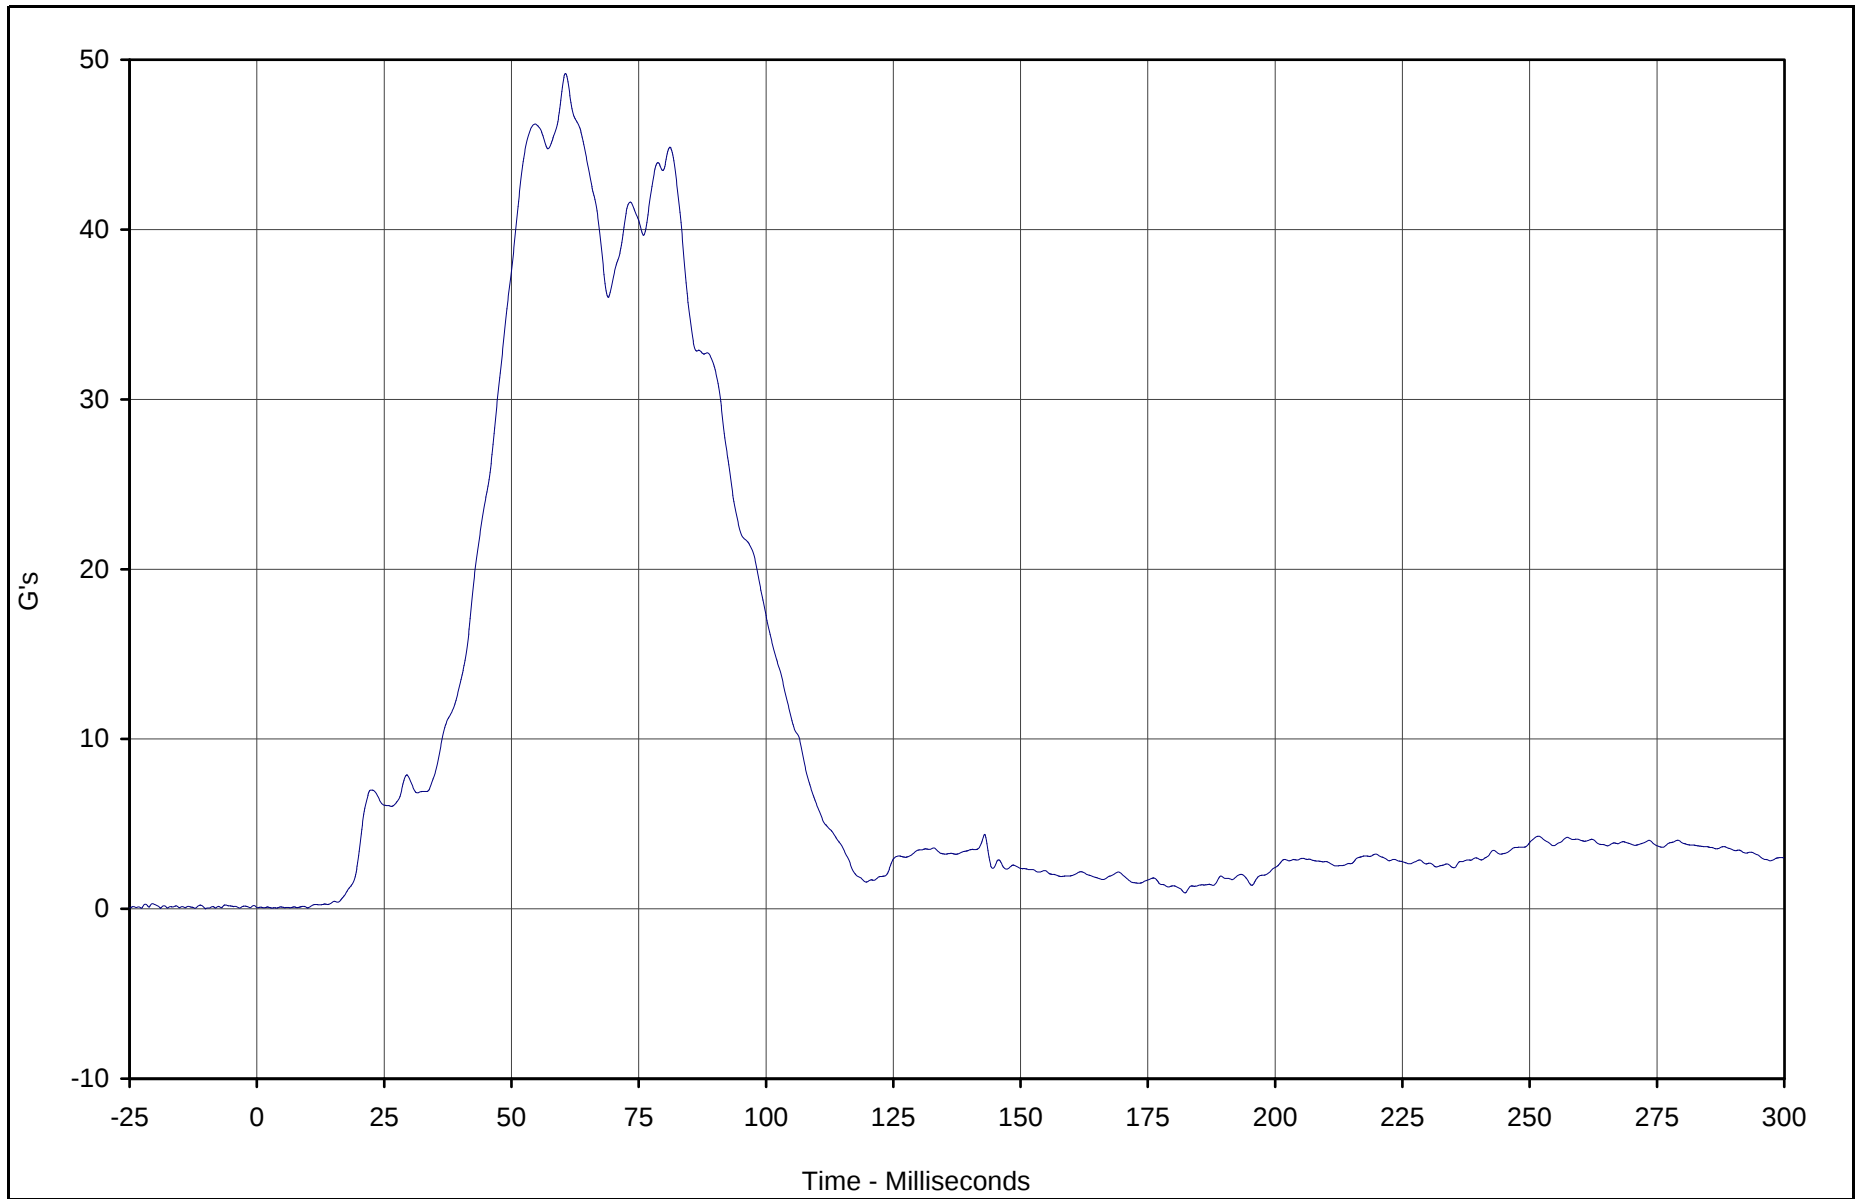

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Chest Resultant Primary	013	RES	G's	49.2	60.6	0.1	3.0	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

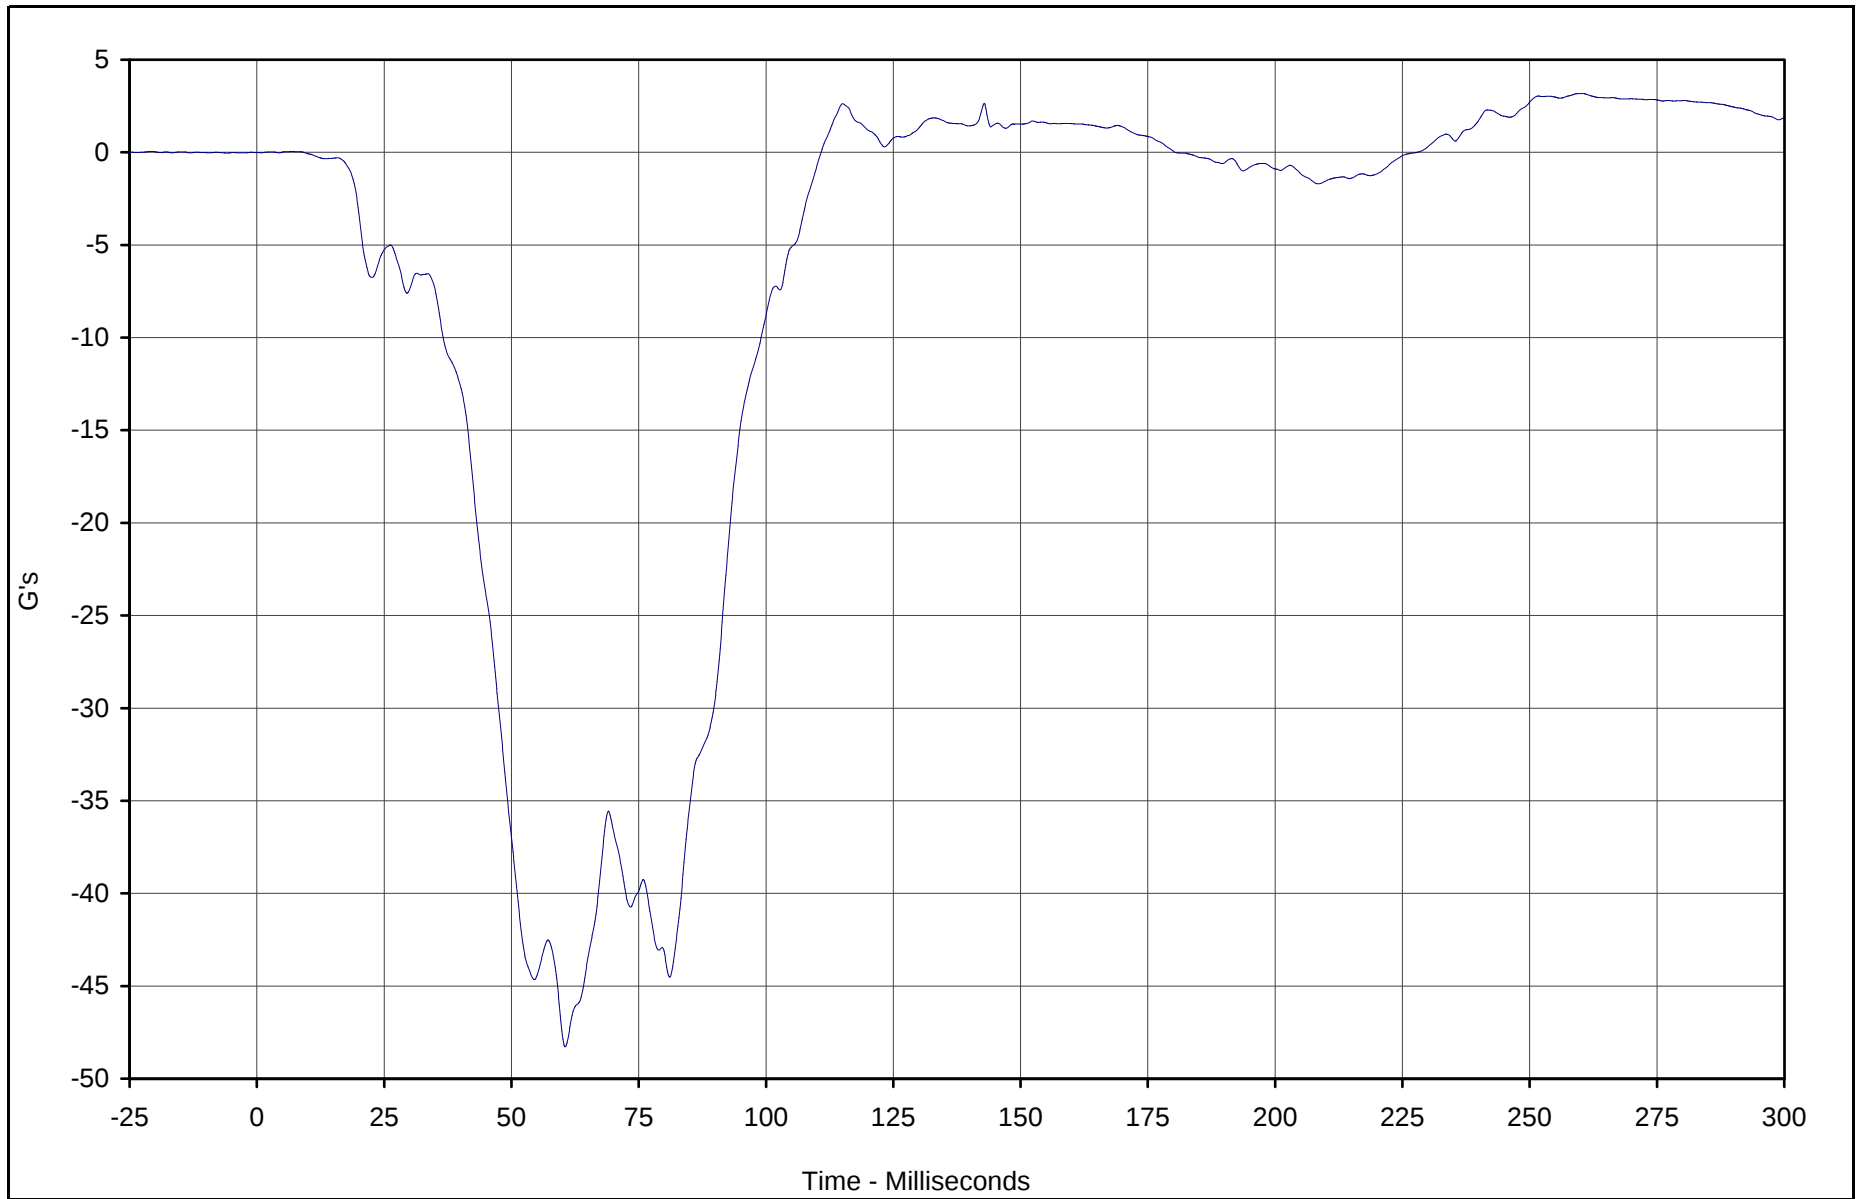

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Chest Redundant X	016	FIL	G's	3.2	260.2	-48.3	60.6	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

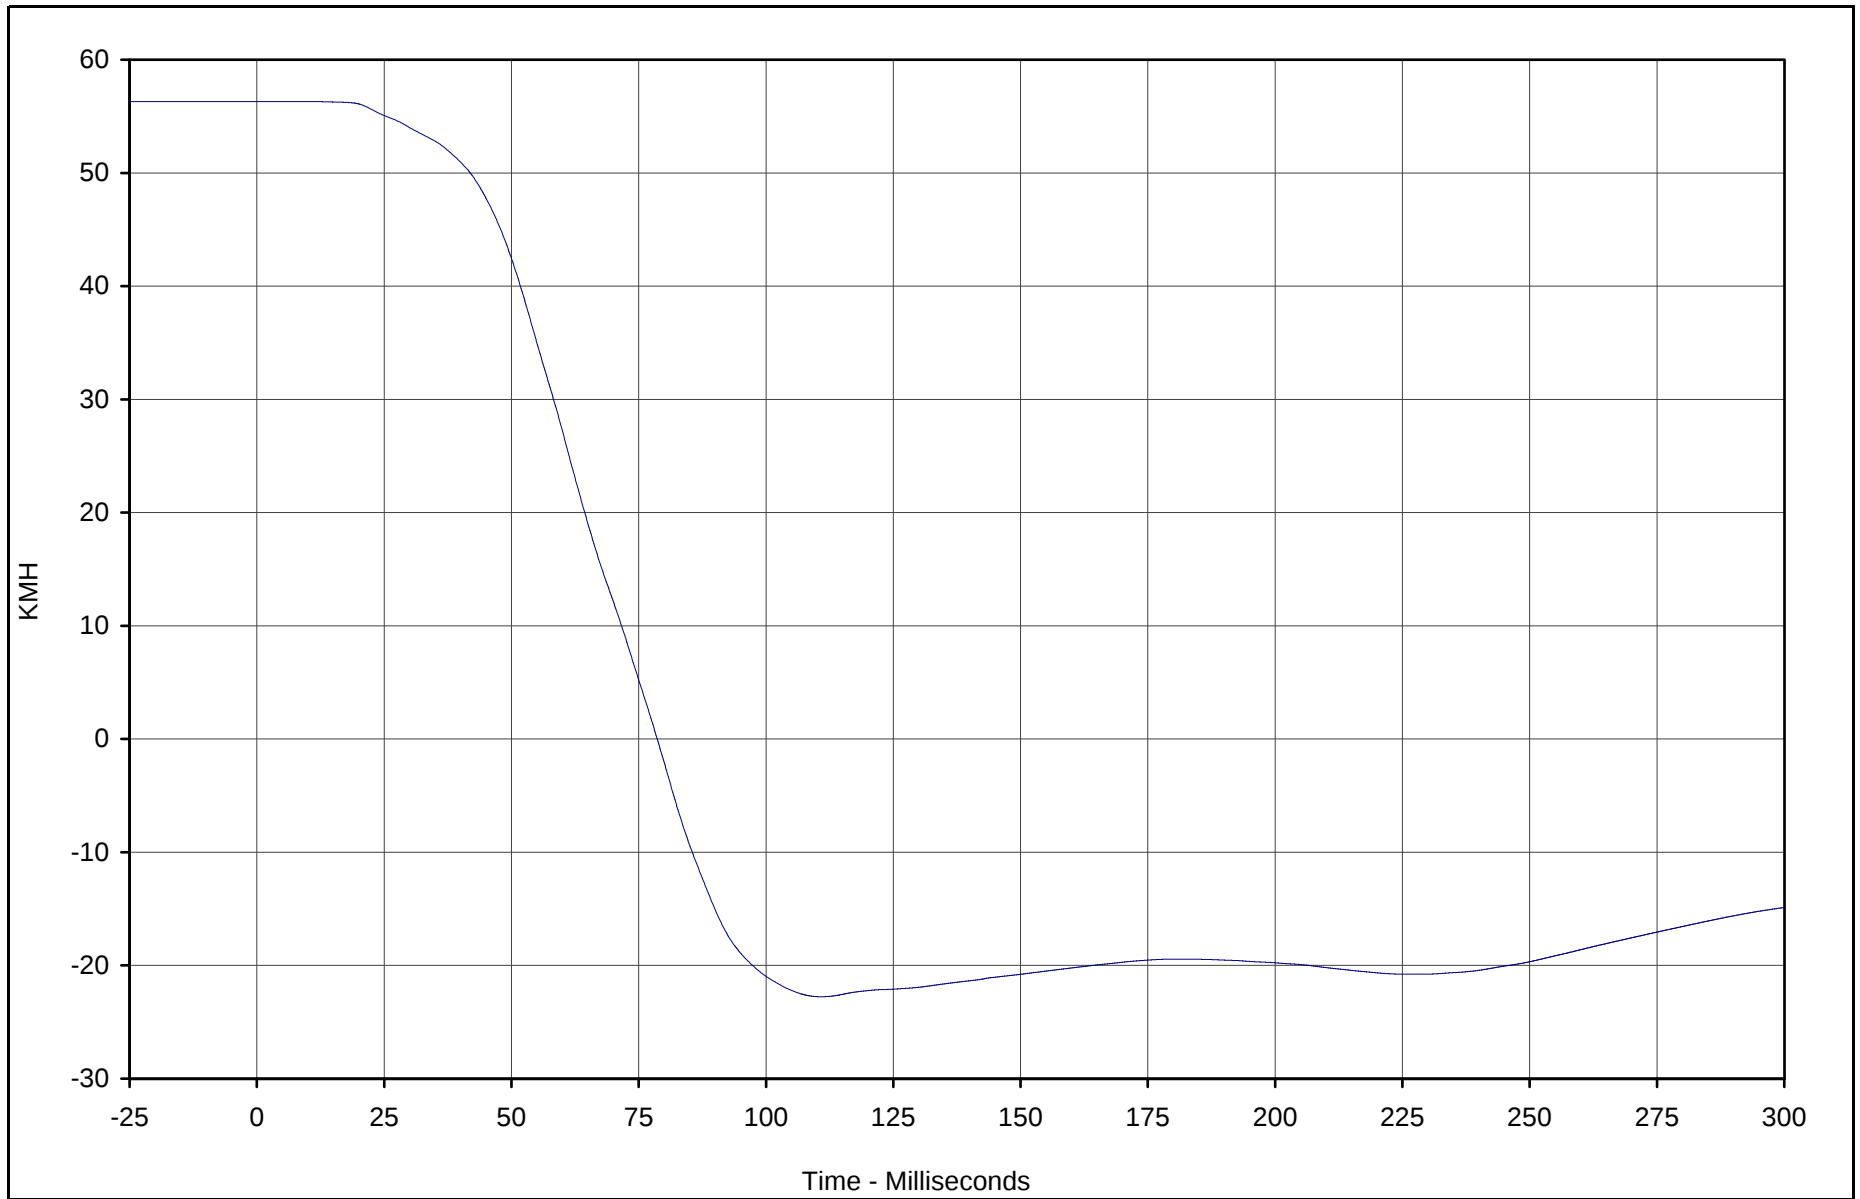

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Chest Redundant X Velocity	016	IN1	KMH	56.3	9.2	-22.8	110.8	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

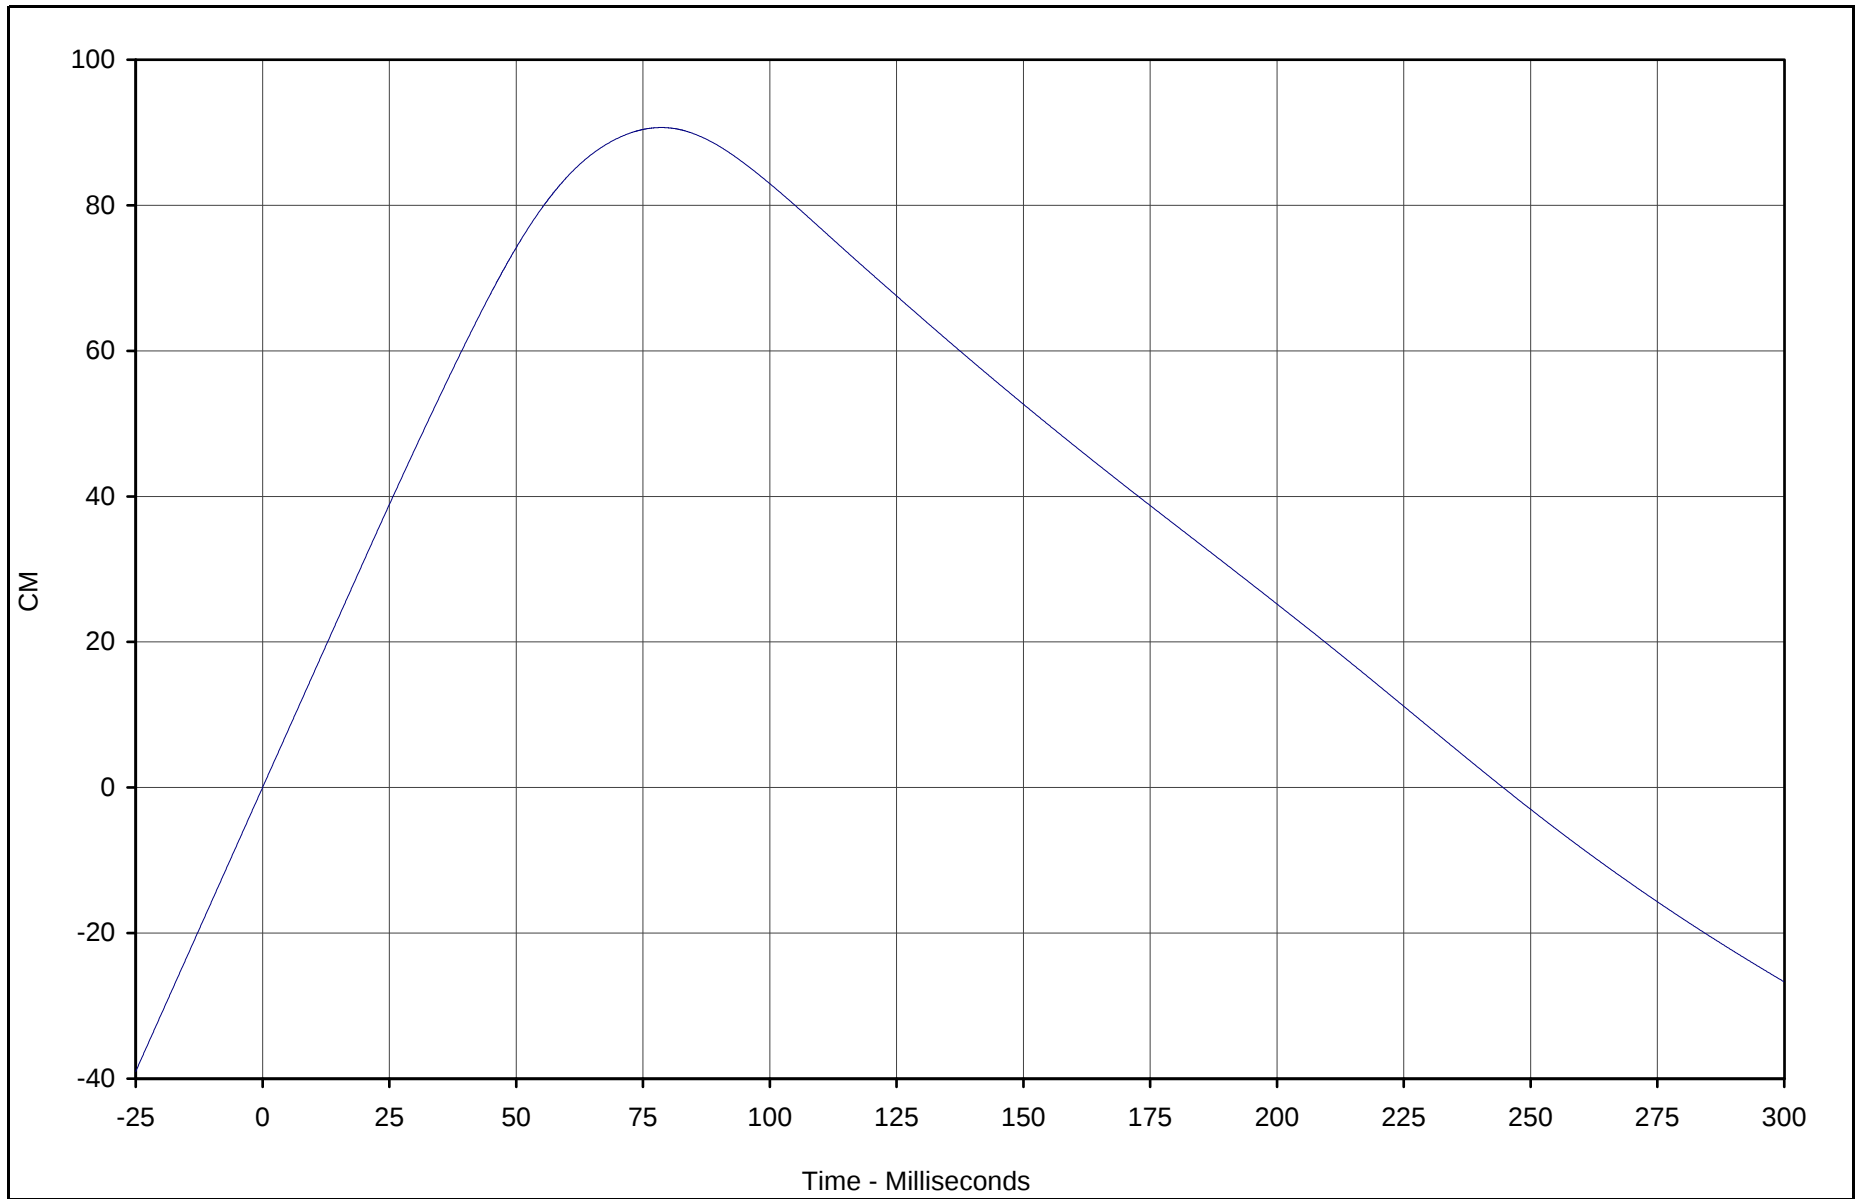

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Chest Redundant X Displ.	016	IN2	CM	90.7	78.6	-26.7	299.9	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

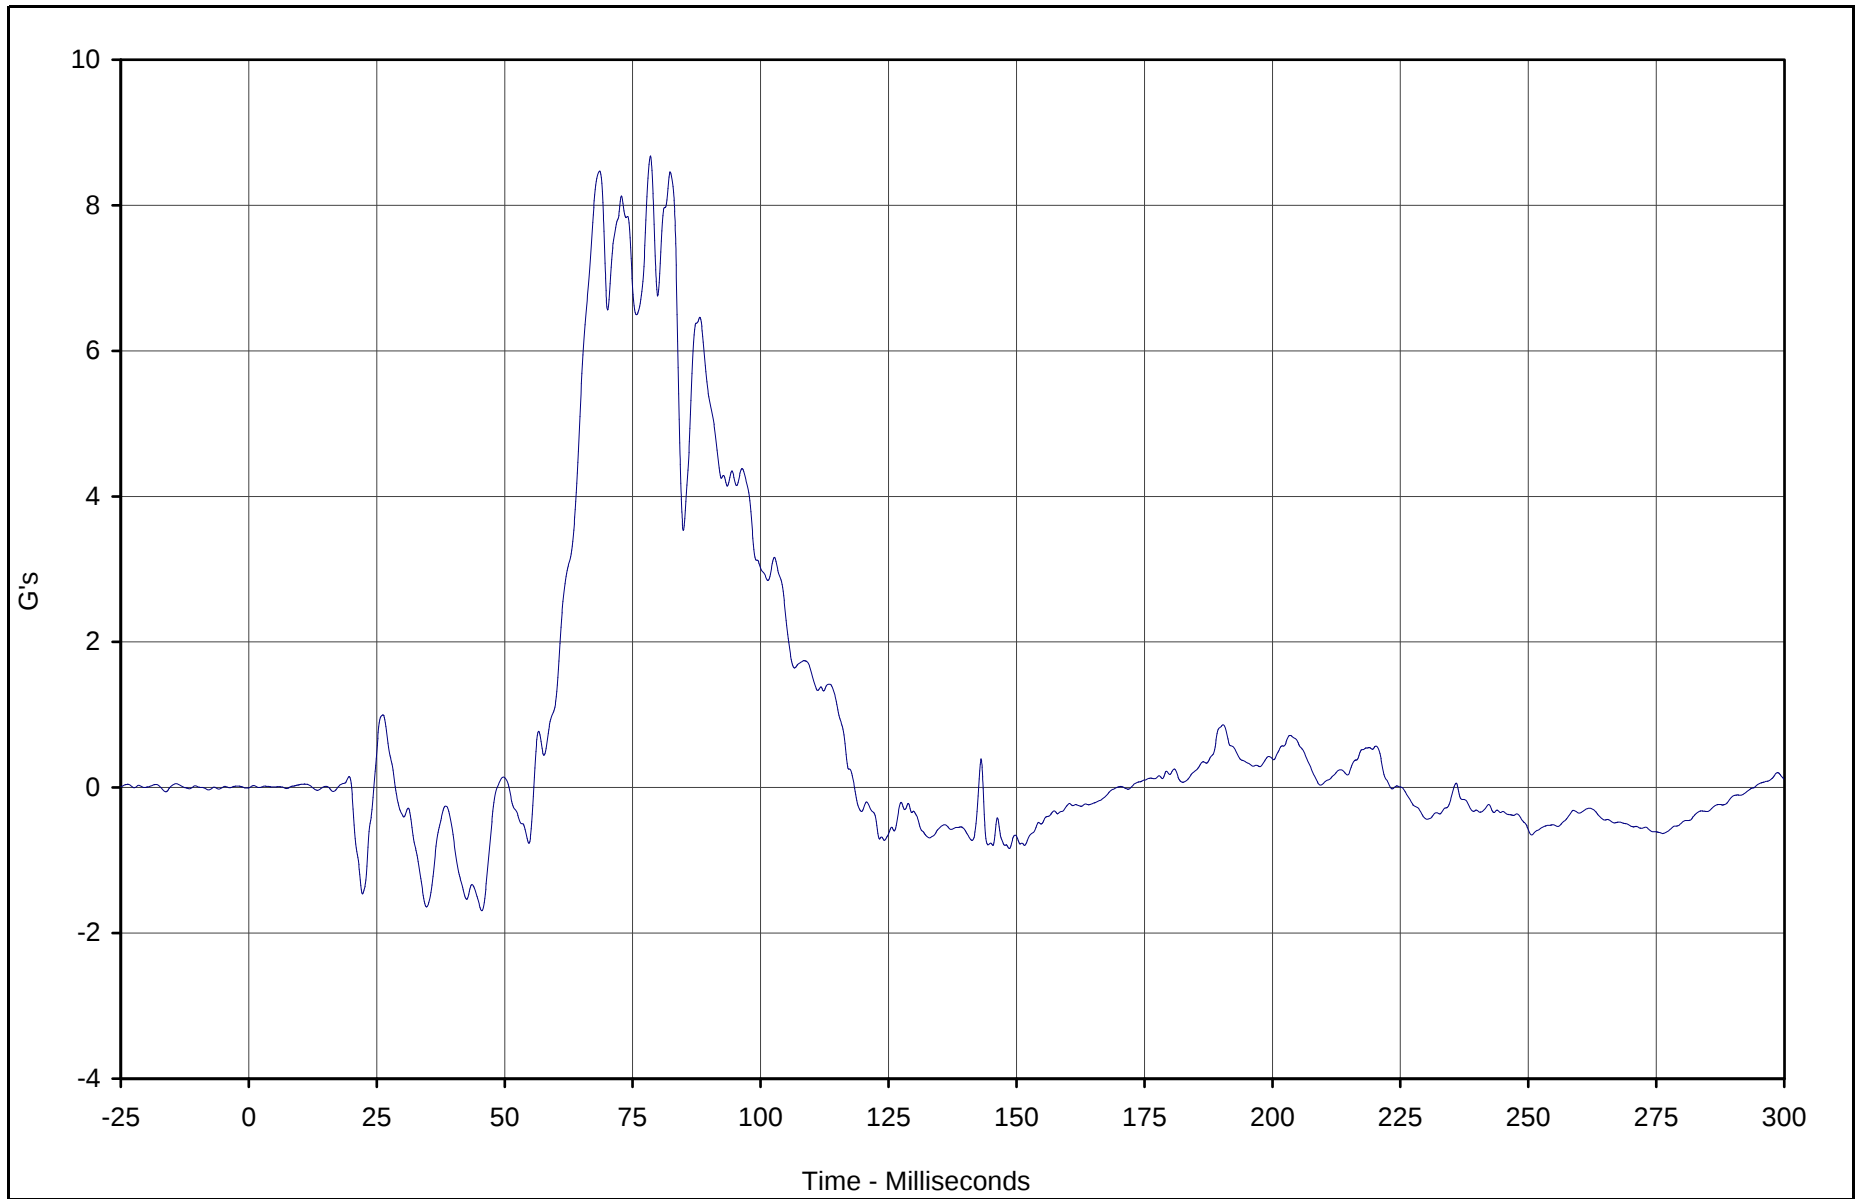

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Chest Redundant Y	017	FIL	G's	8.7	78.5	-1.7	45.5	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

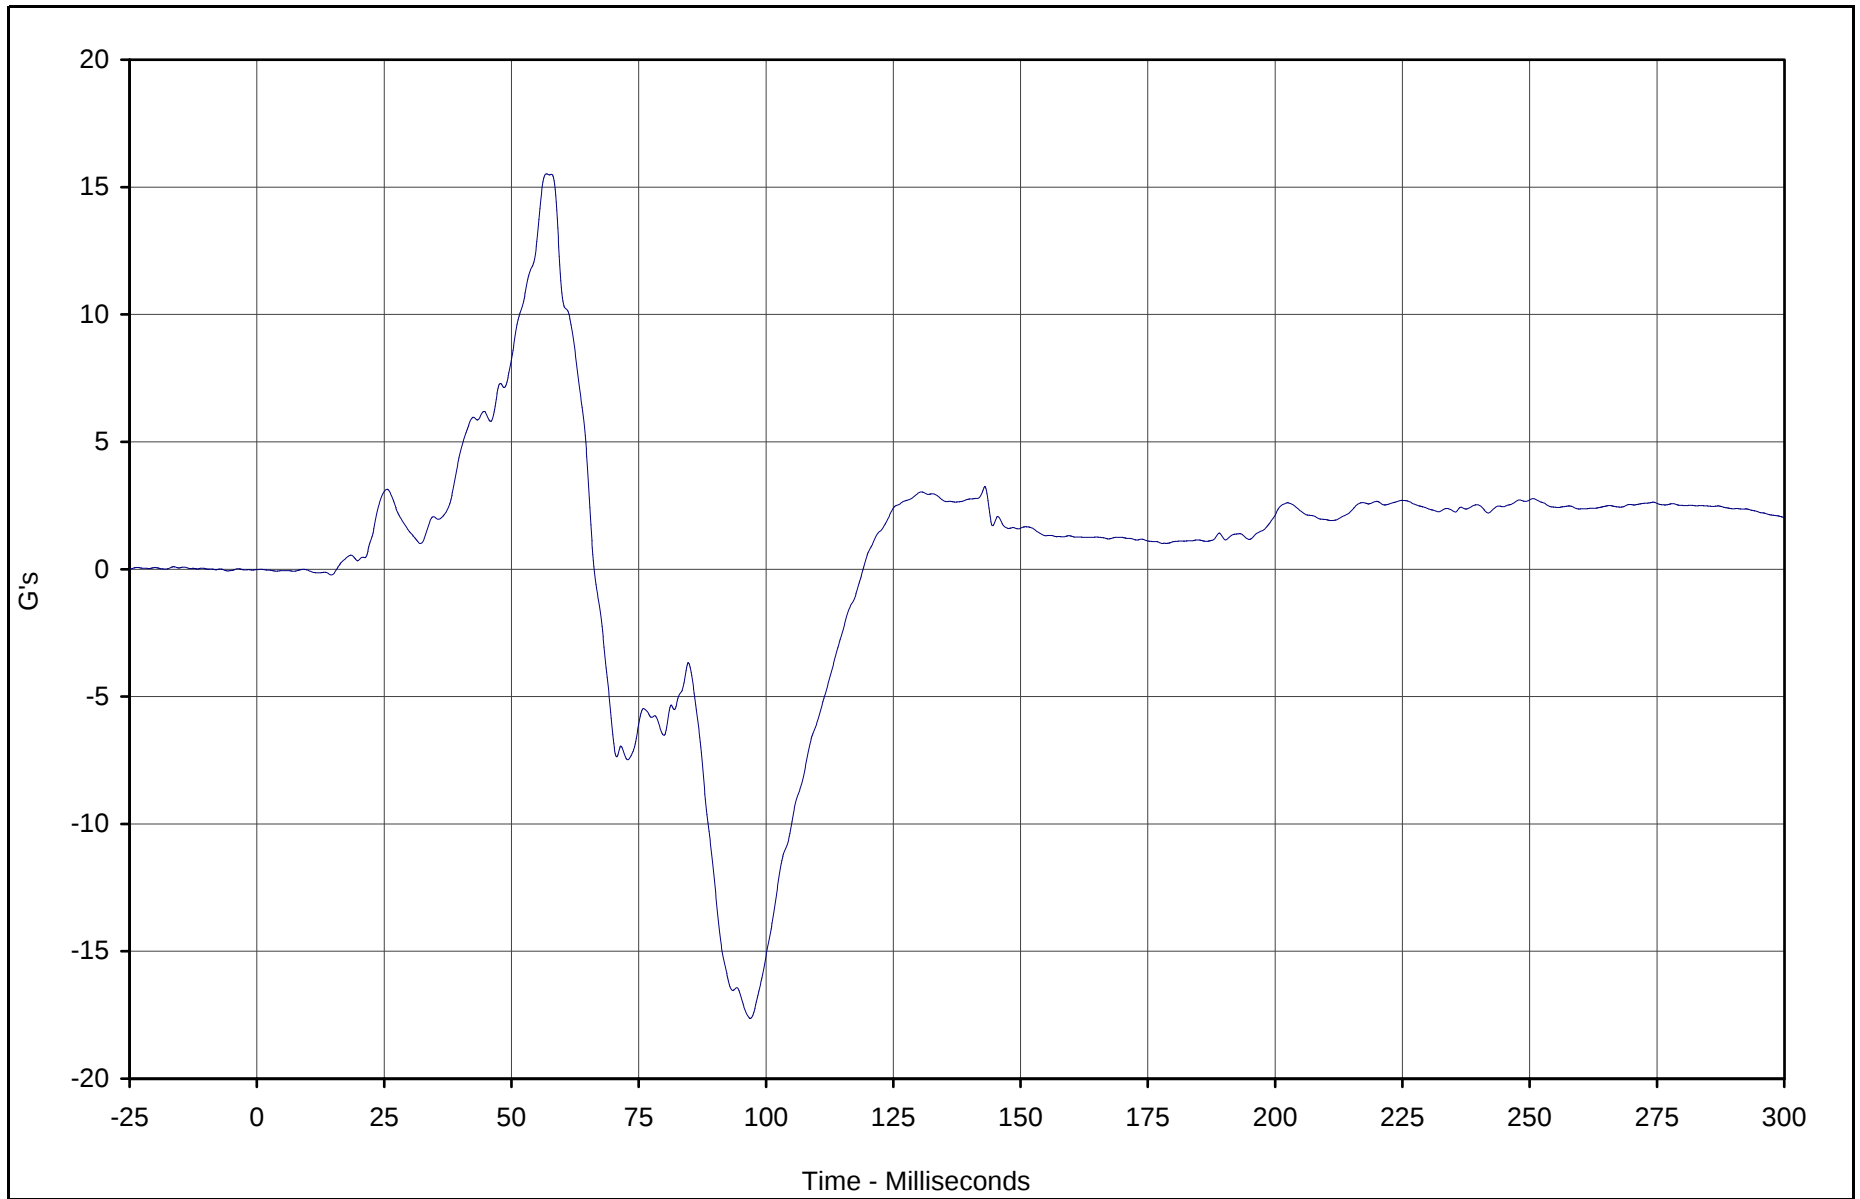

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Chest Redundant Z	018	FIL	G's	15.5	56.9	-17.6	96.9	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

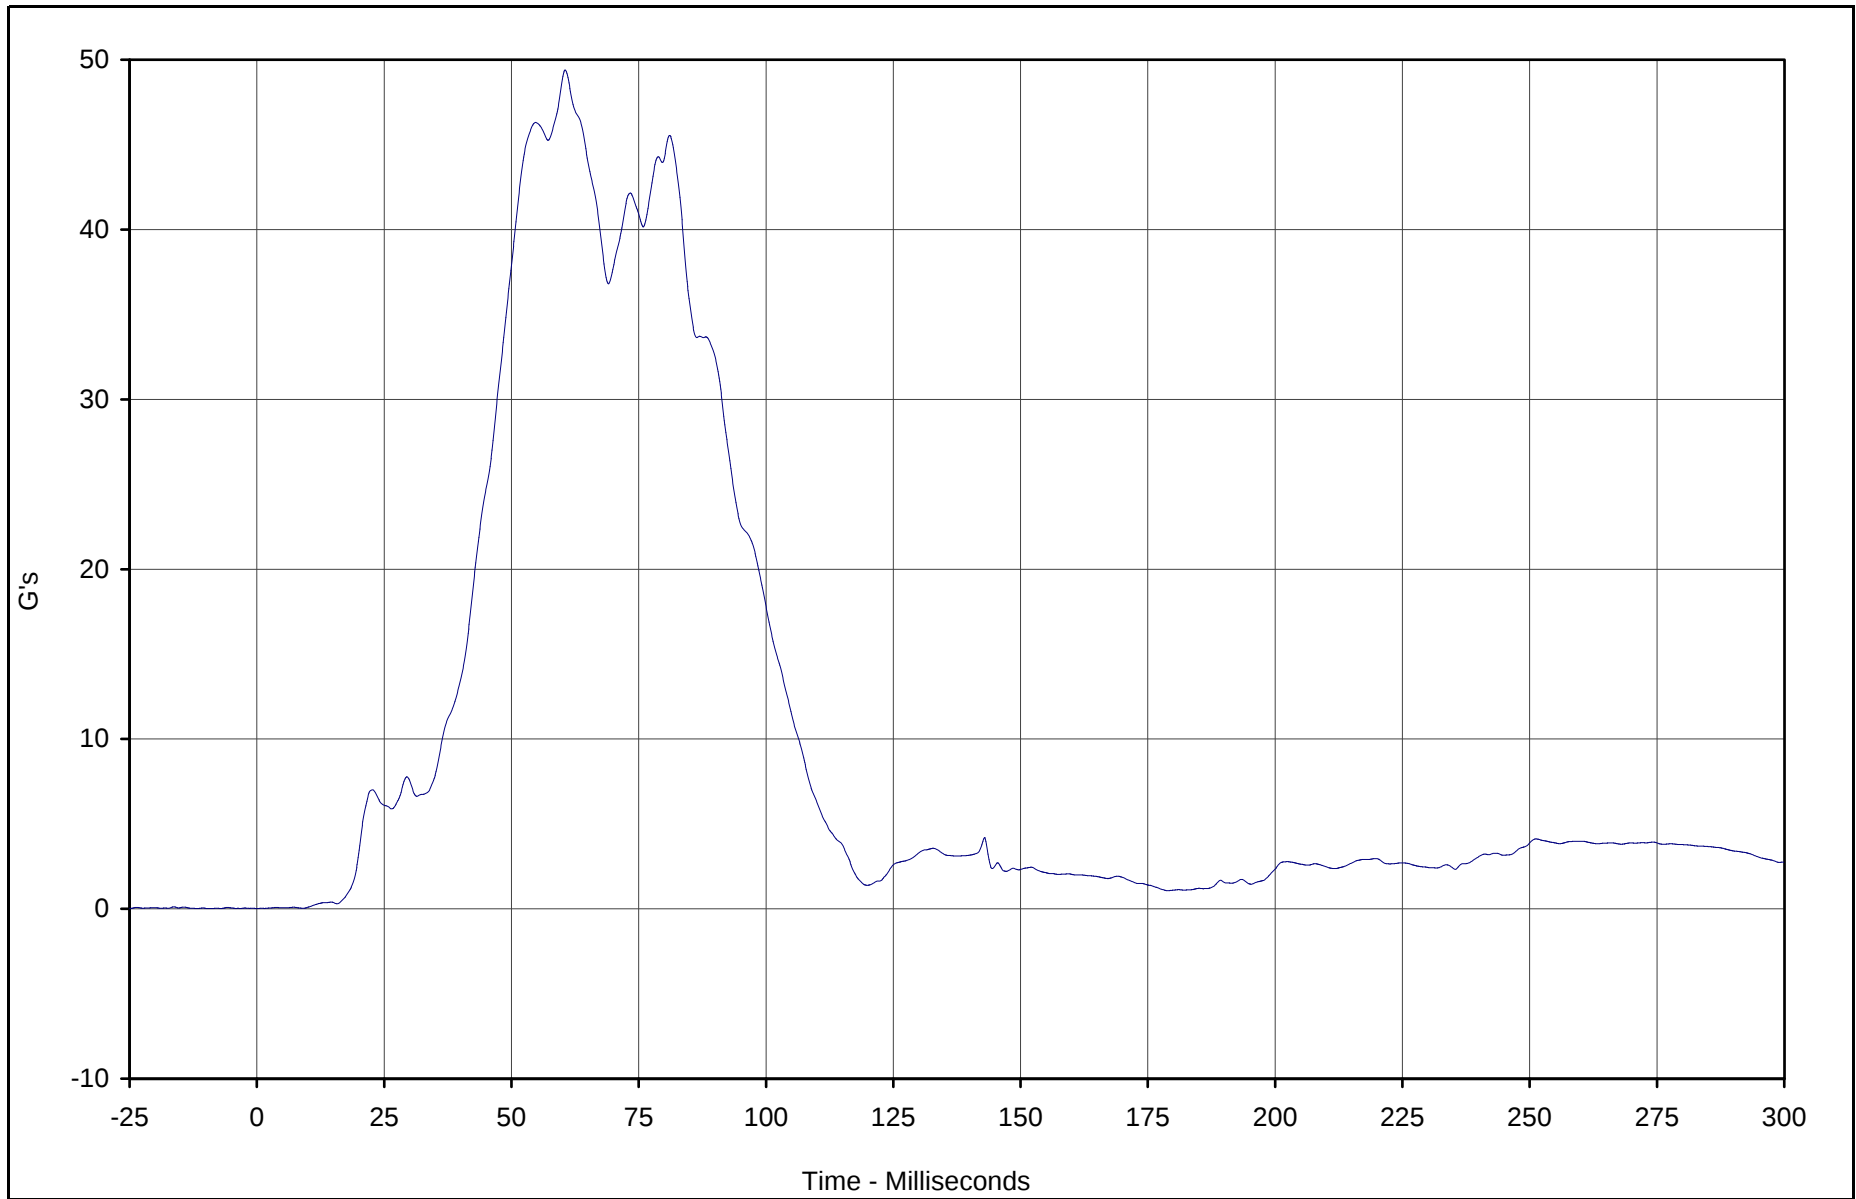

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Chest Resultant Redundant	016	RES	G's	49.4	60.6	0.0	0.2	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

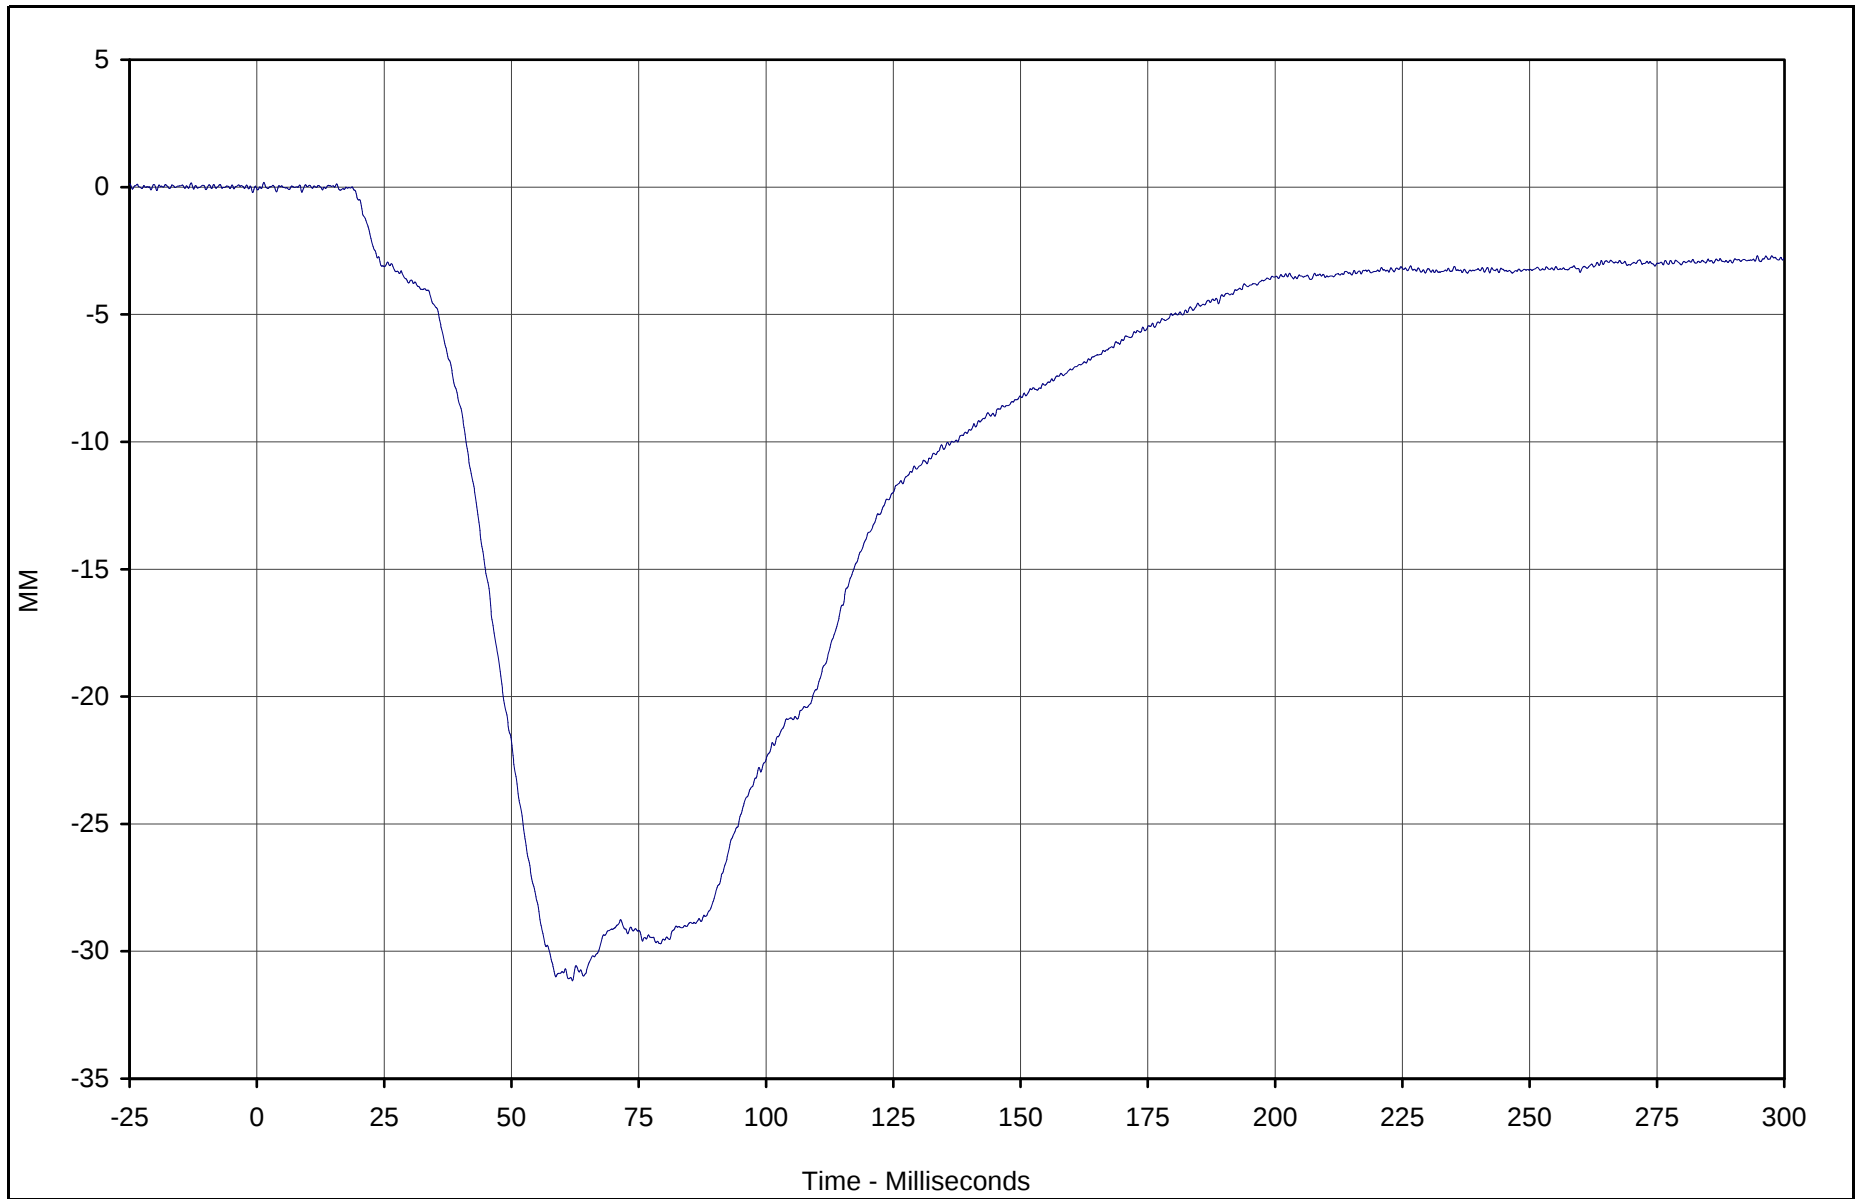

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Chest Displacement X	019	FIL	MM	0.2	1.4	-31.2	62.0	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

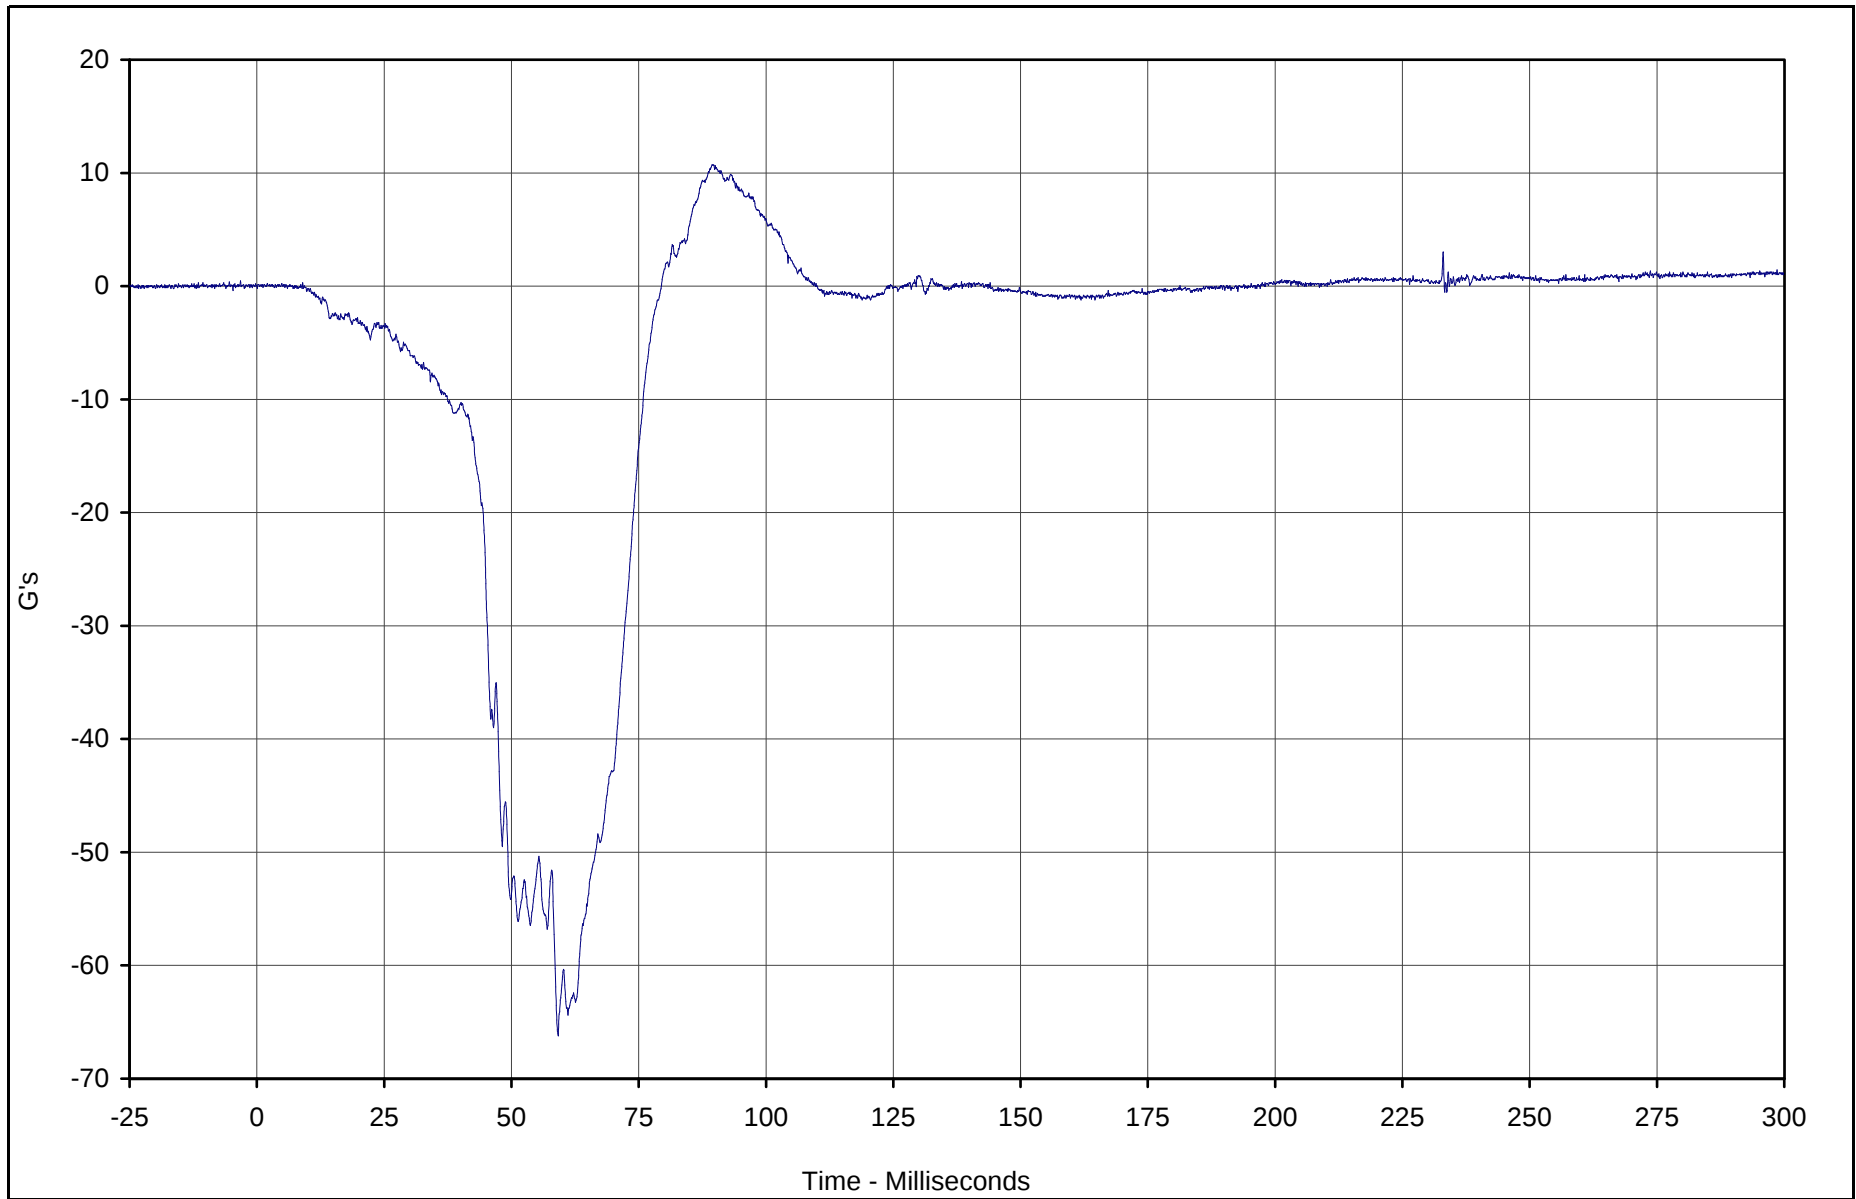

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Pelvis X	020	FIL	G's	10.7	89.4	-66.2	59.2	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

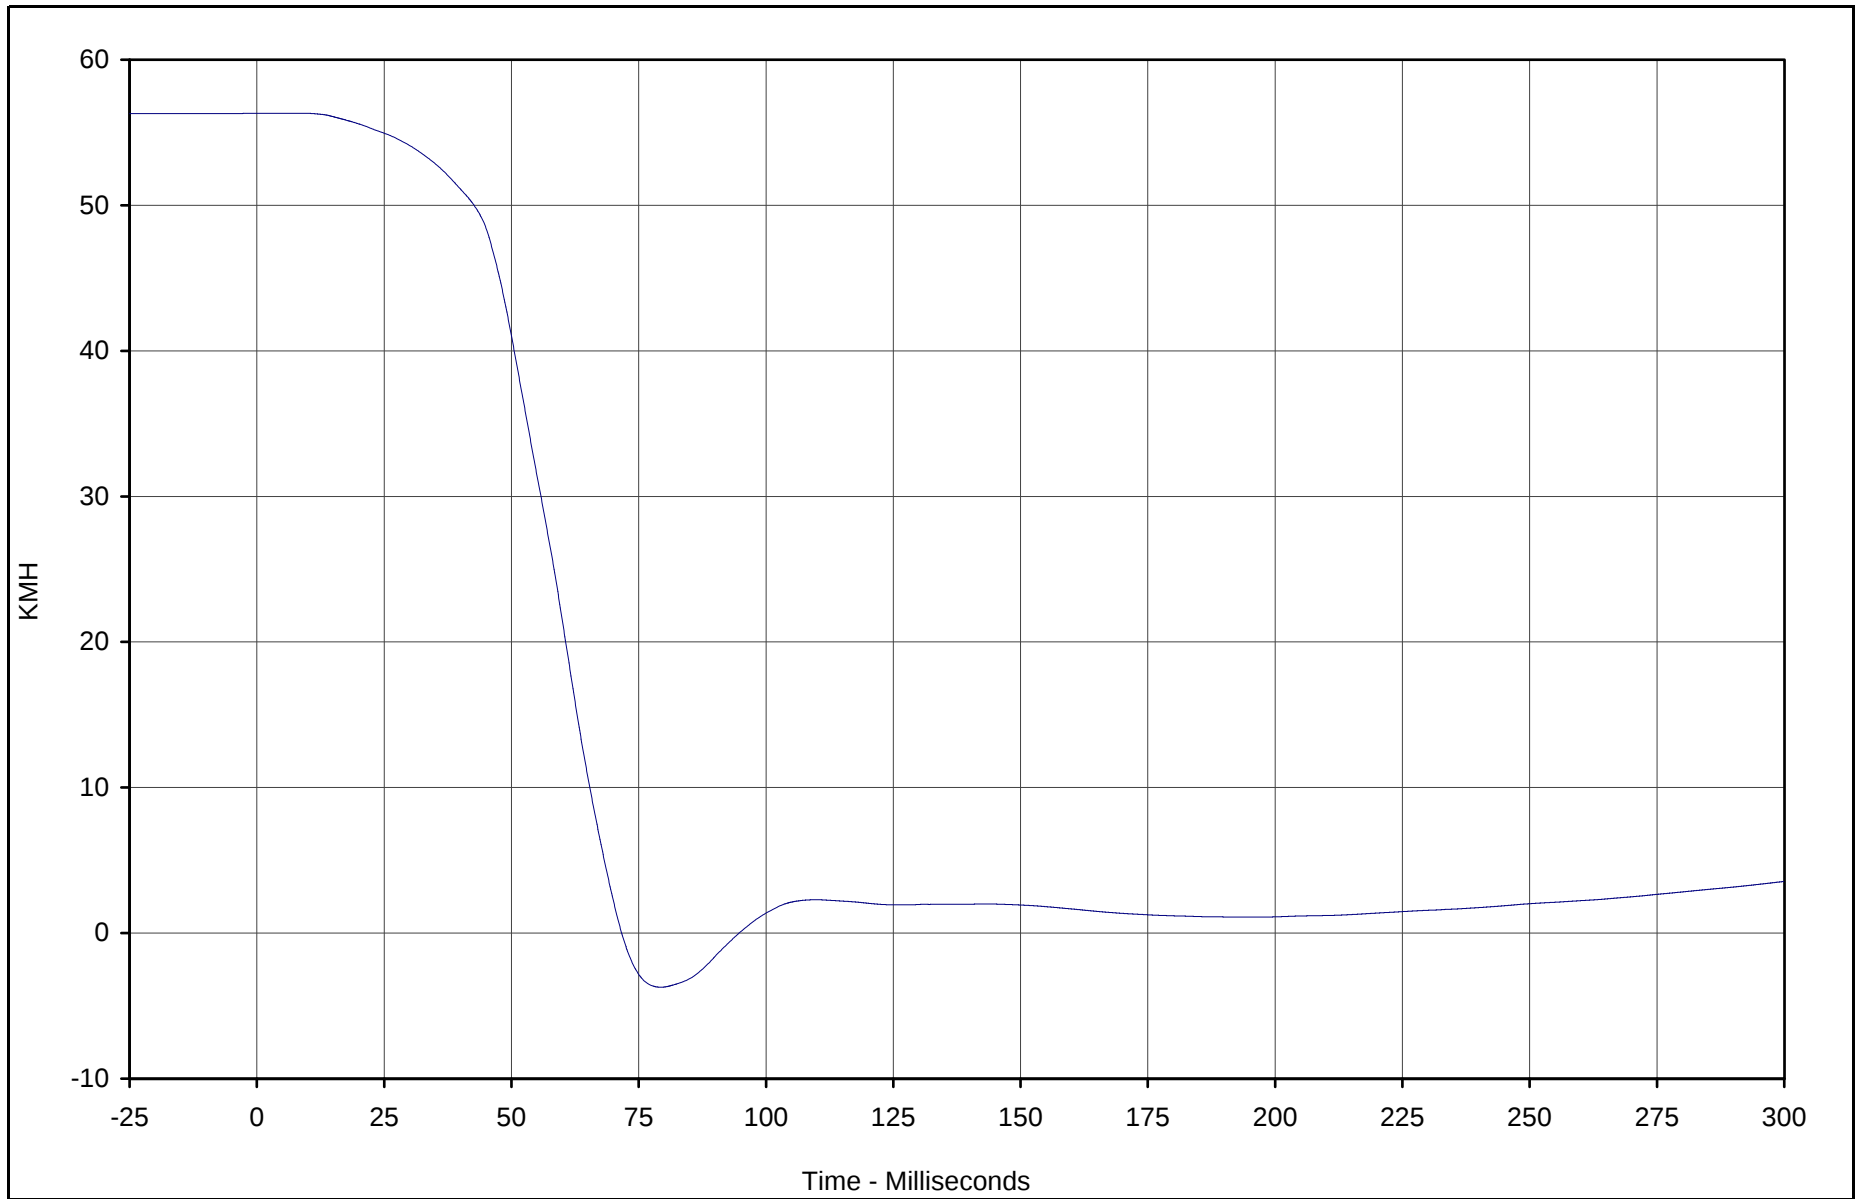

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Pelvis X Velocity	020	IN1	KMH	56.3	6.3	-3.7	79.4	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

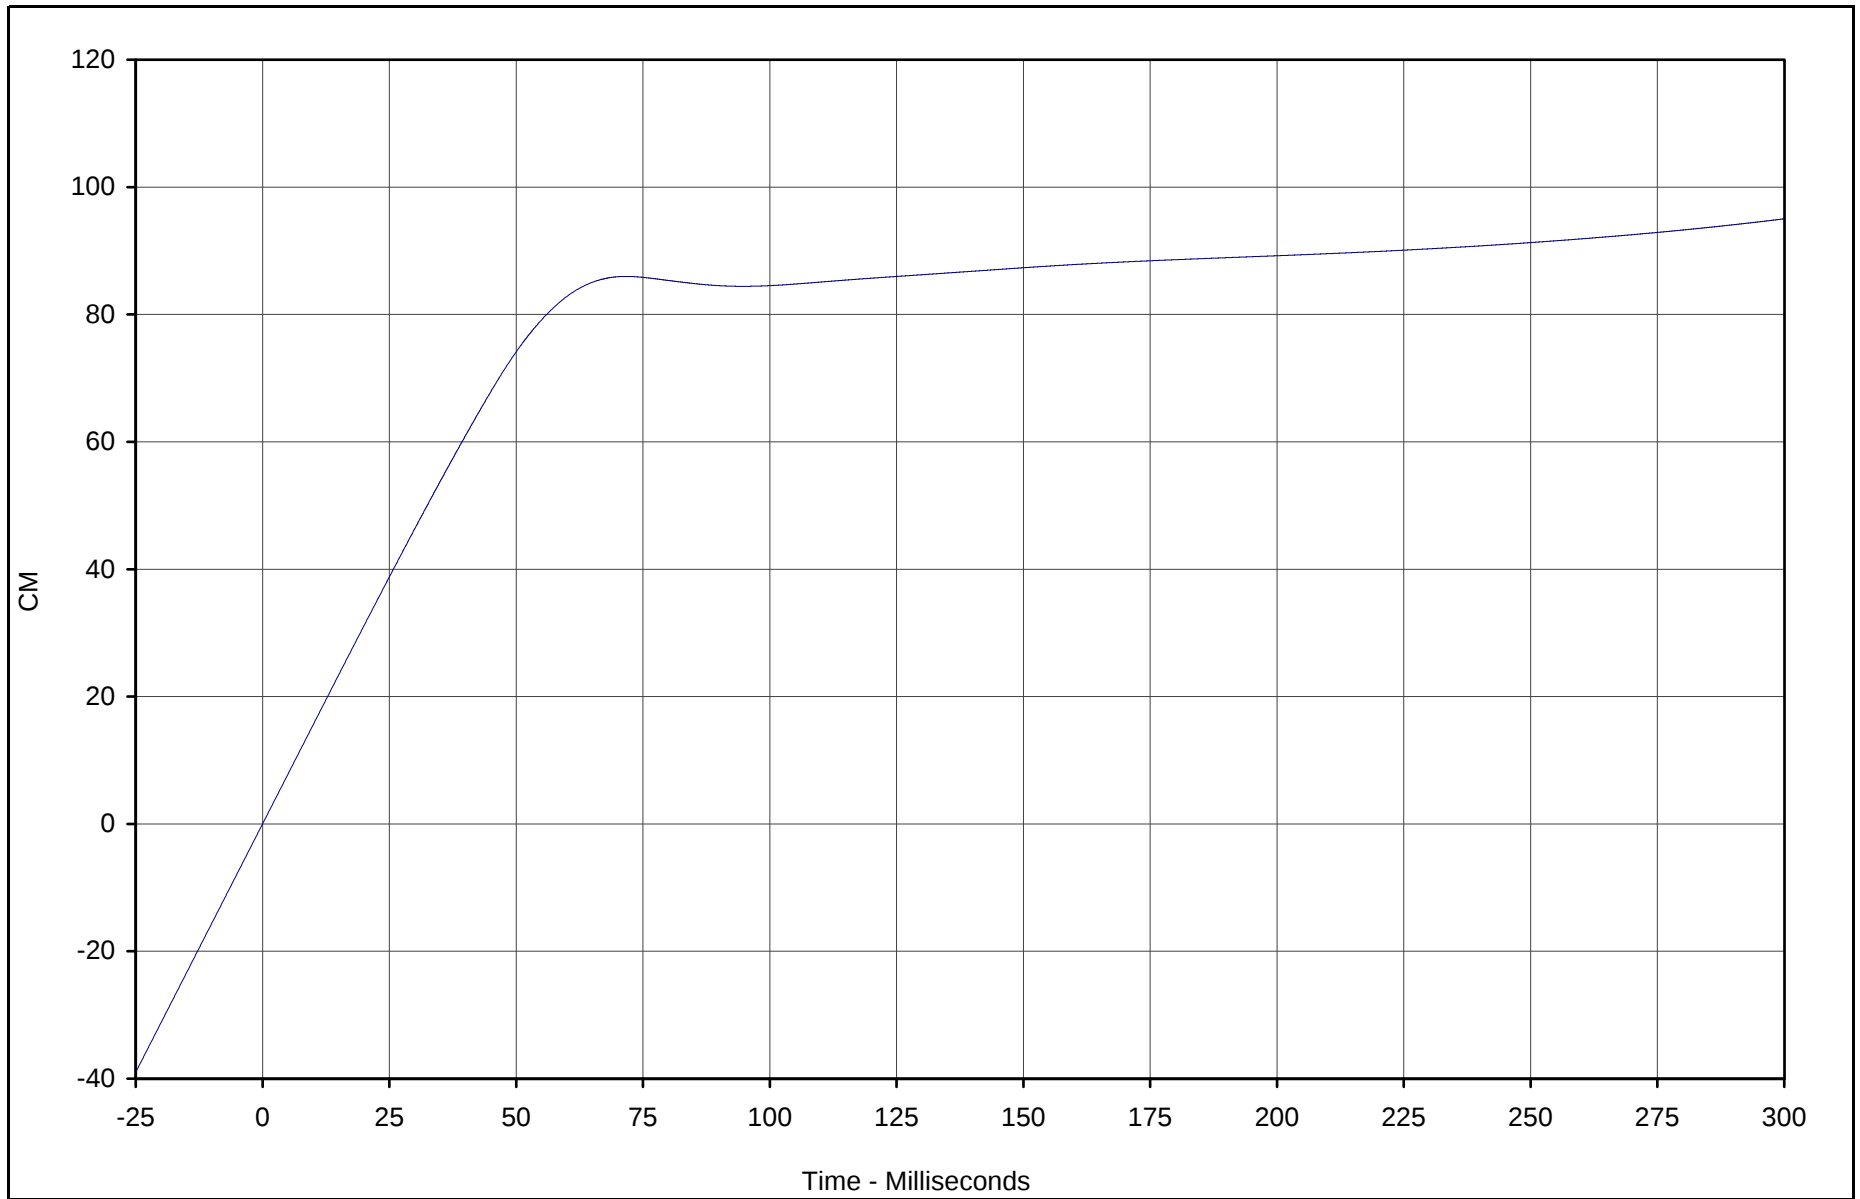

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Pelvis X Displ.	020	IN2	CM	95.0	299.9	0.0	0.0	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

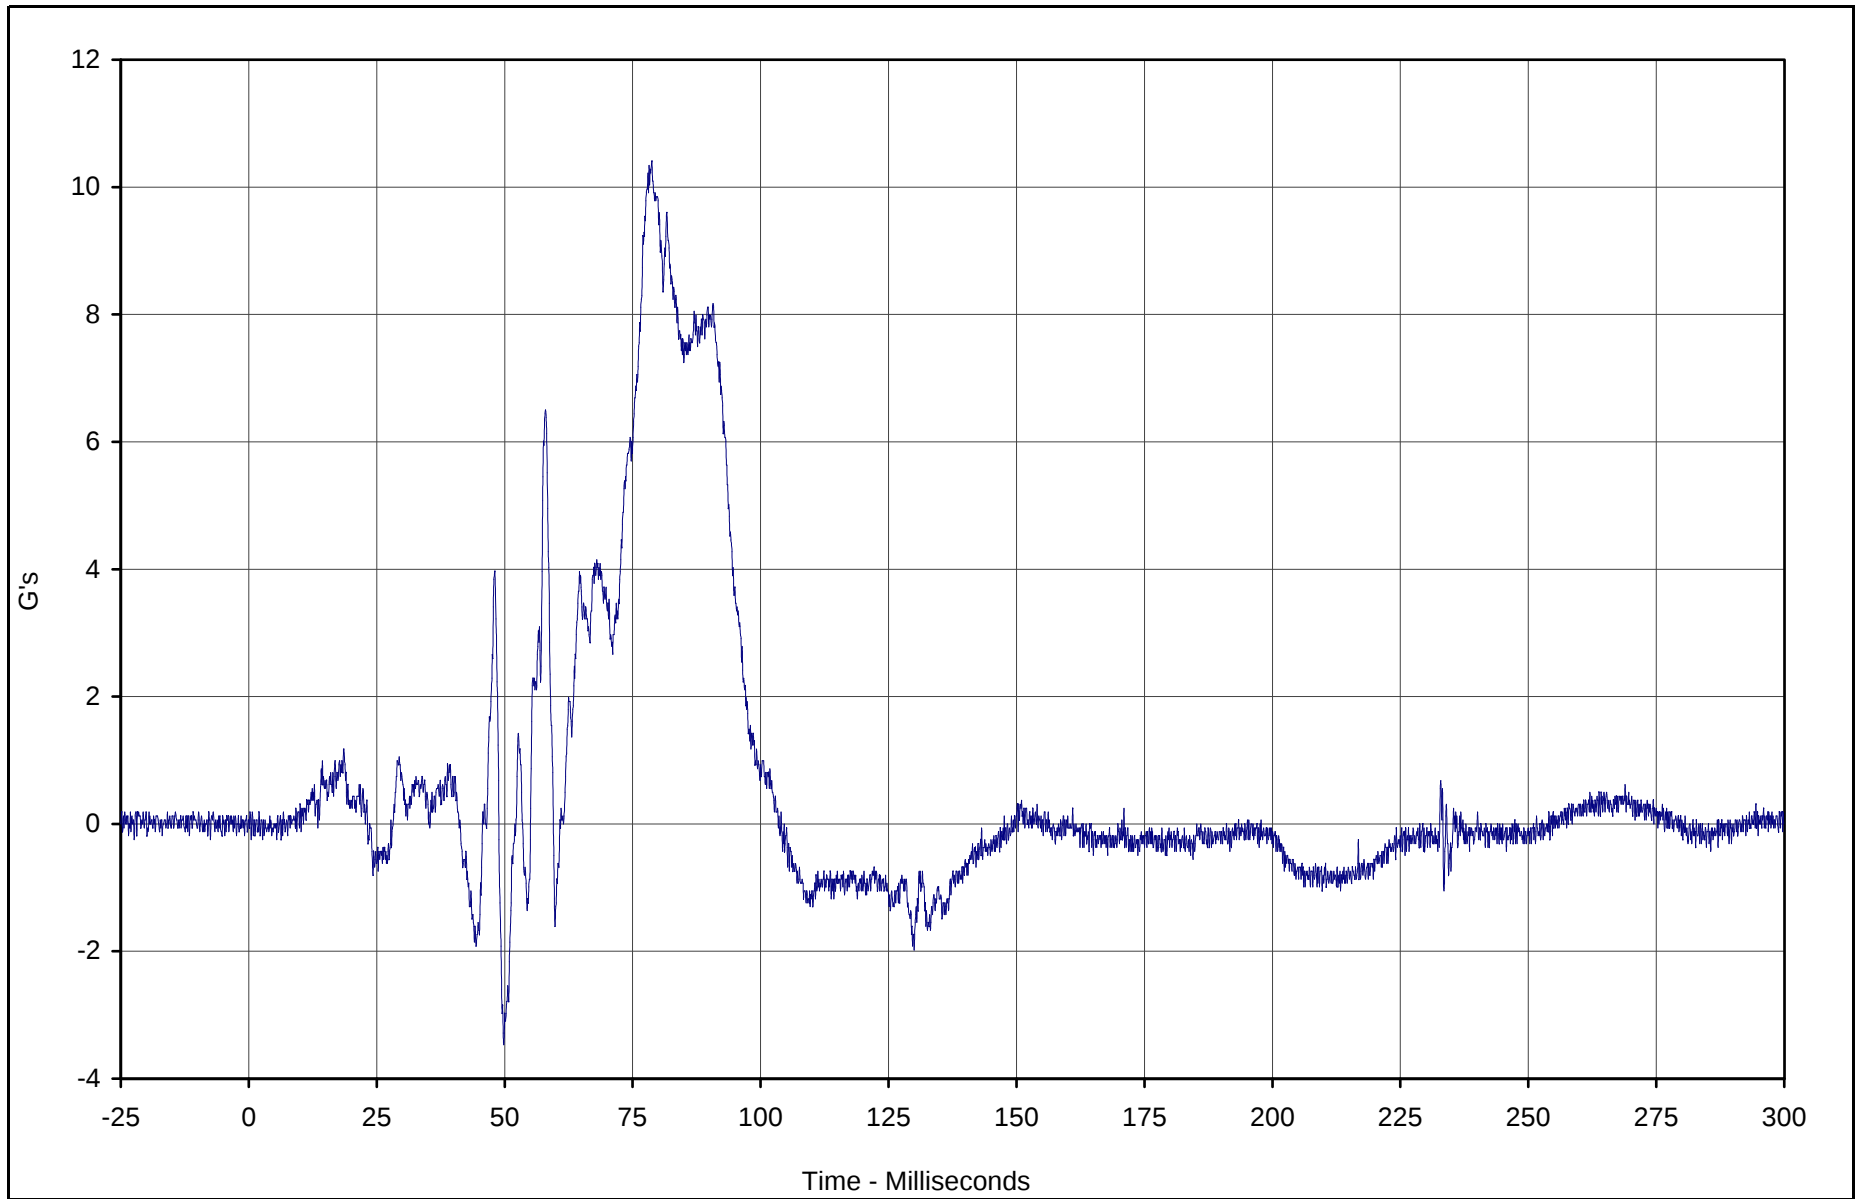

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Pelvis Y	021	FIL	G's	10.4	78.8	-3.5	49.8	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

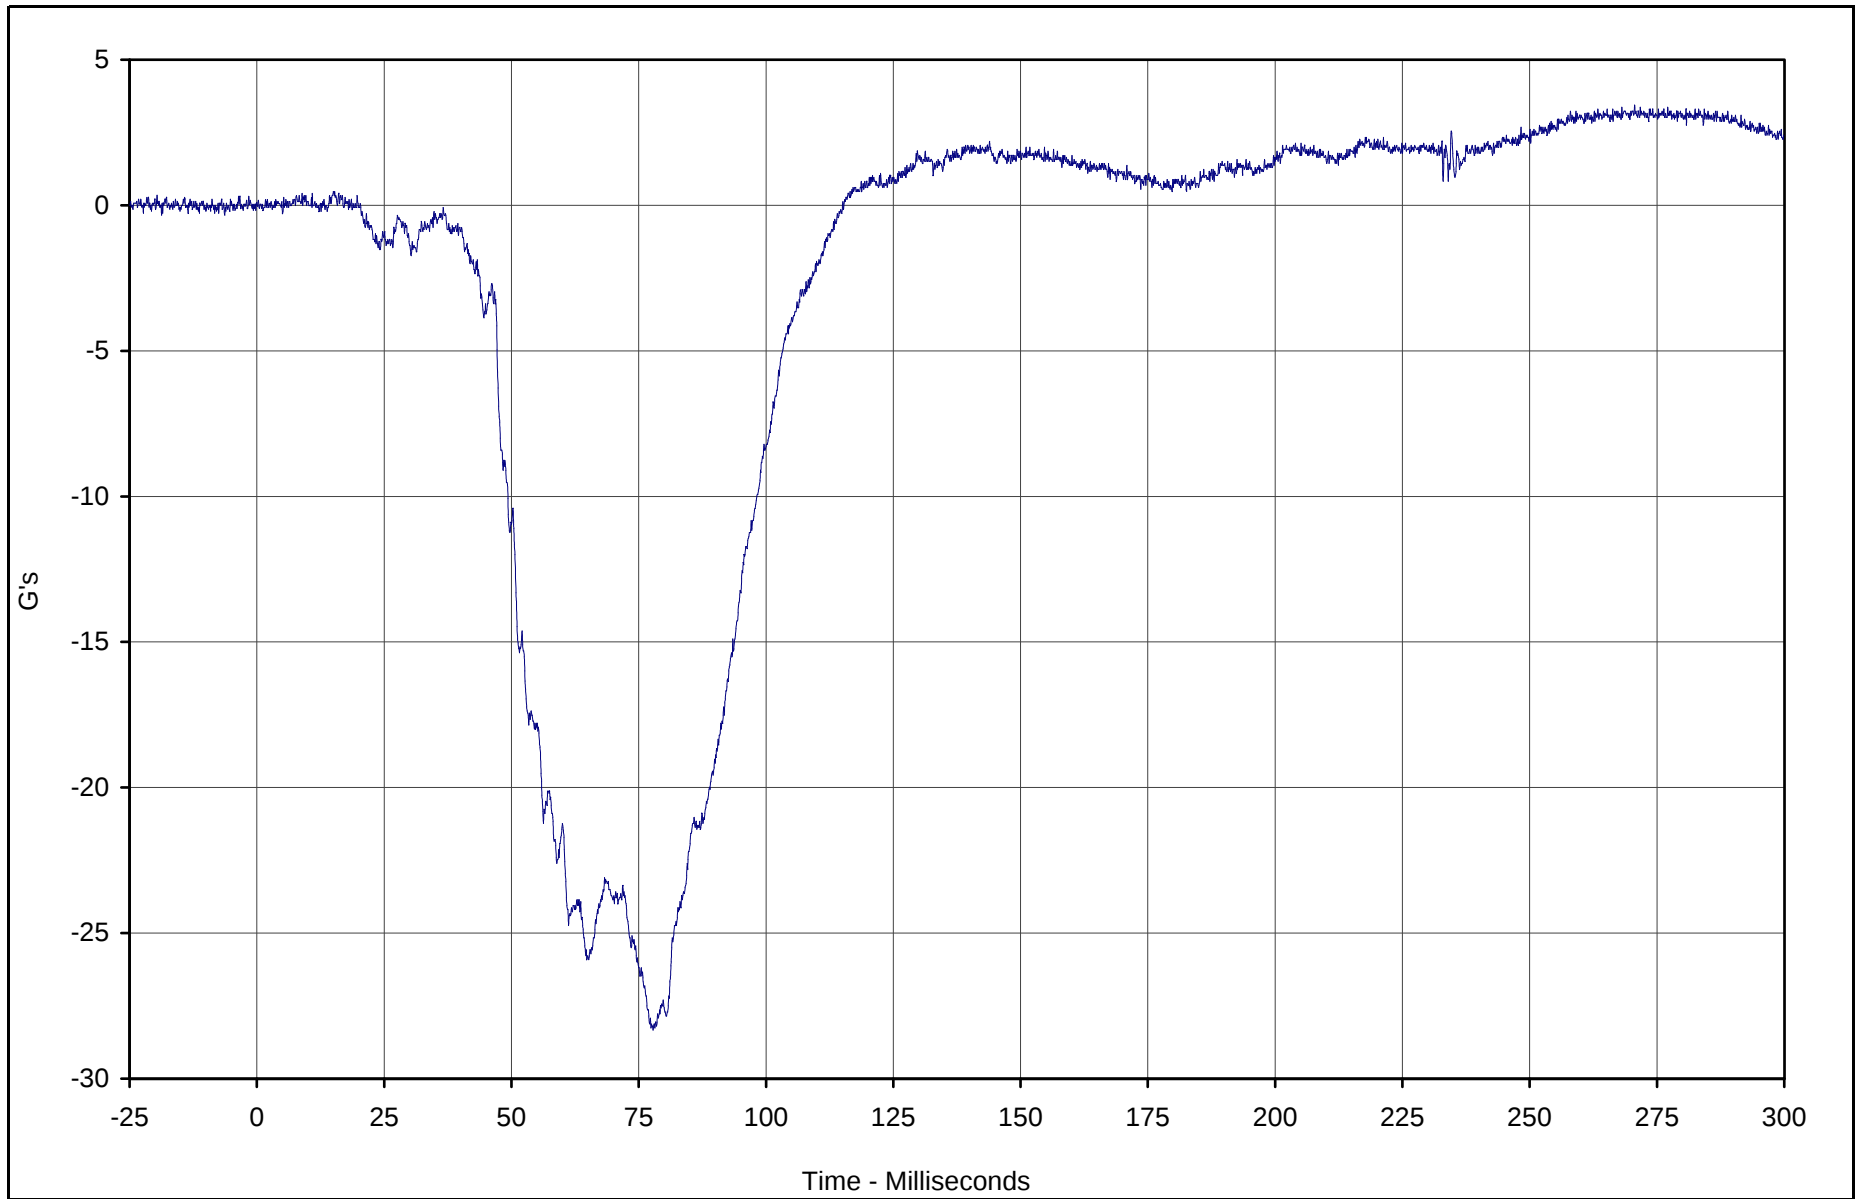

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Pelvis Z	022	FIL	G's	3.4	270.6	-28.3	77.8	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

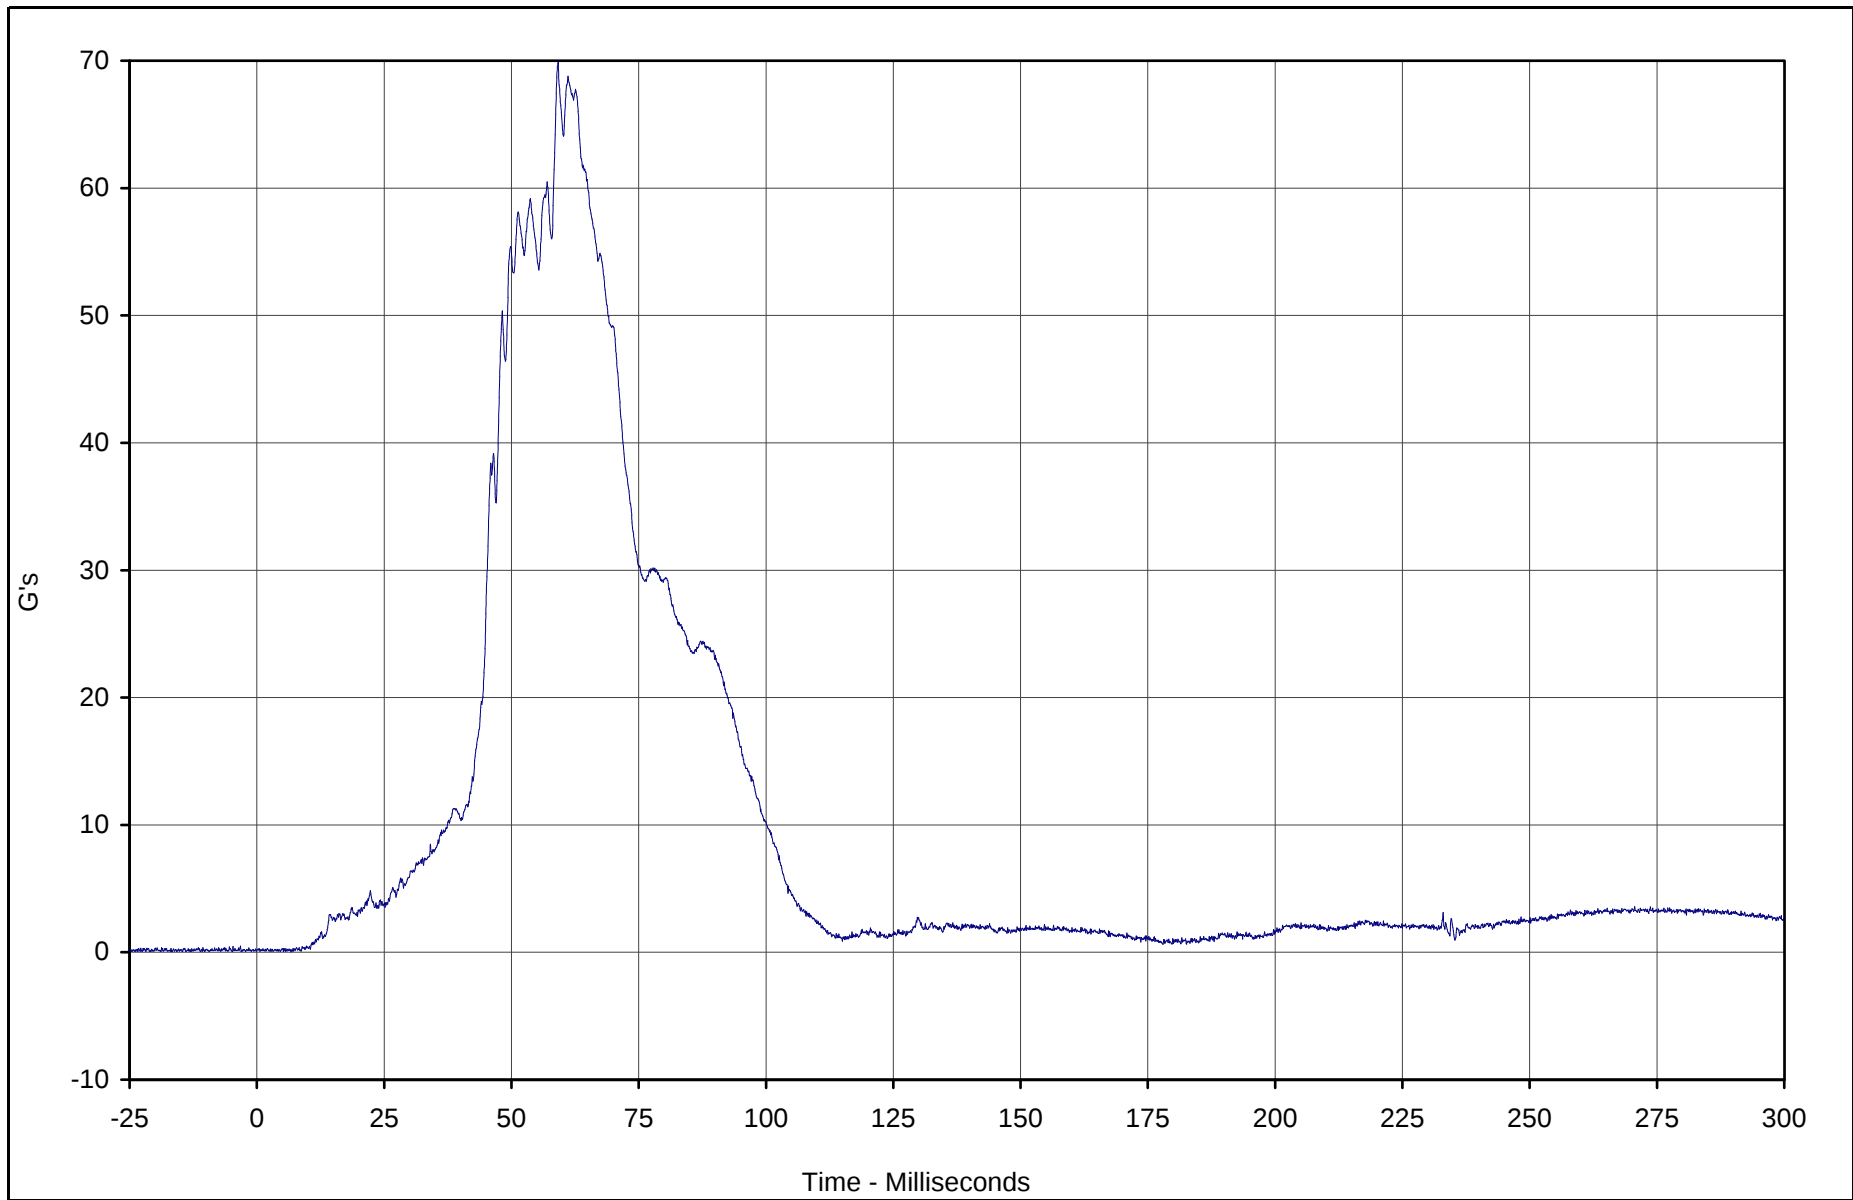

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Pelvis Resultant	023	RES	G's	69.9	59.2	0.0	6.7	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

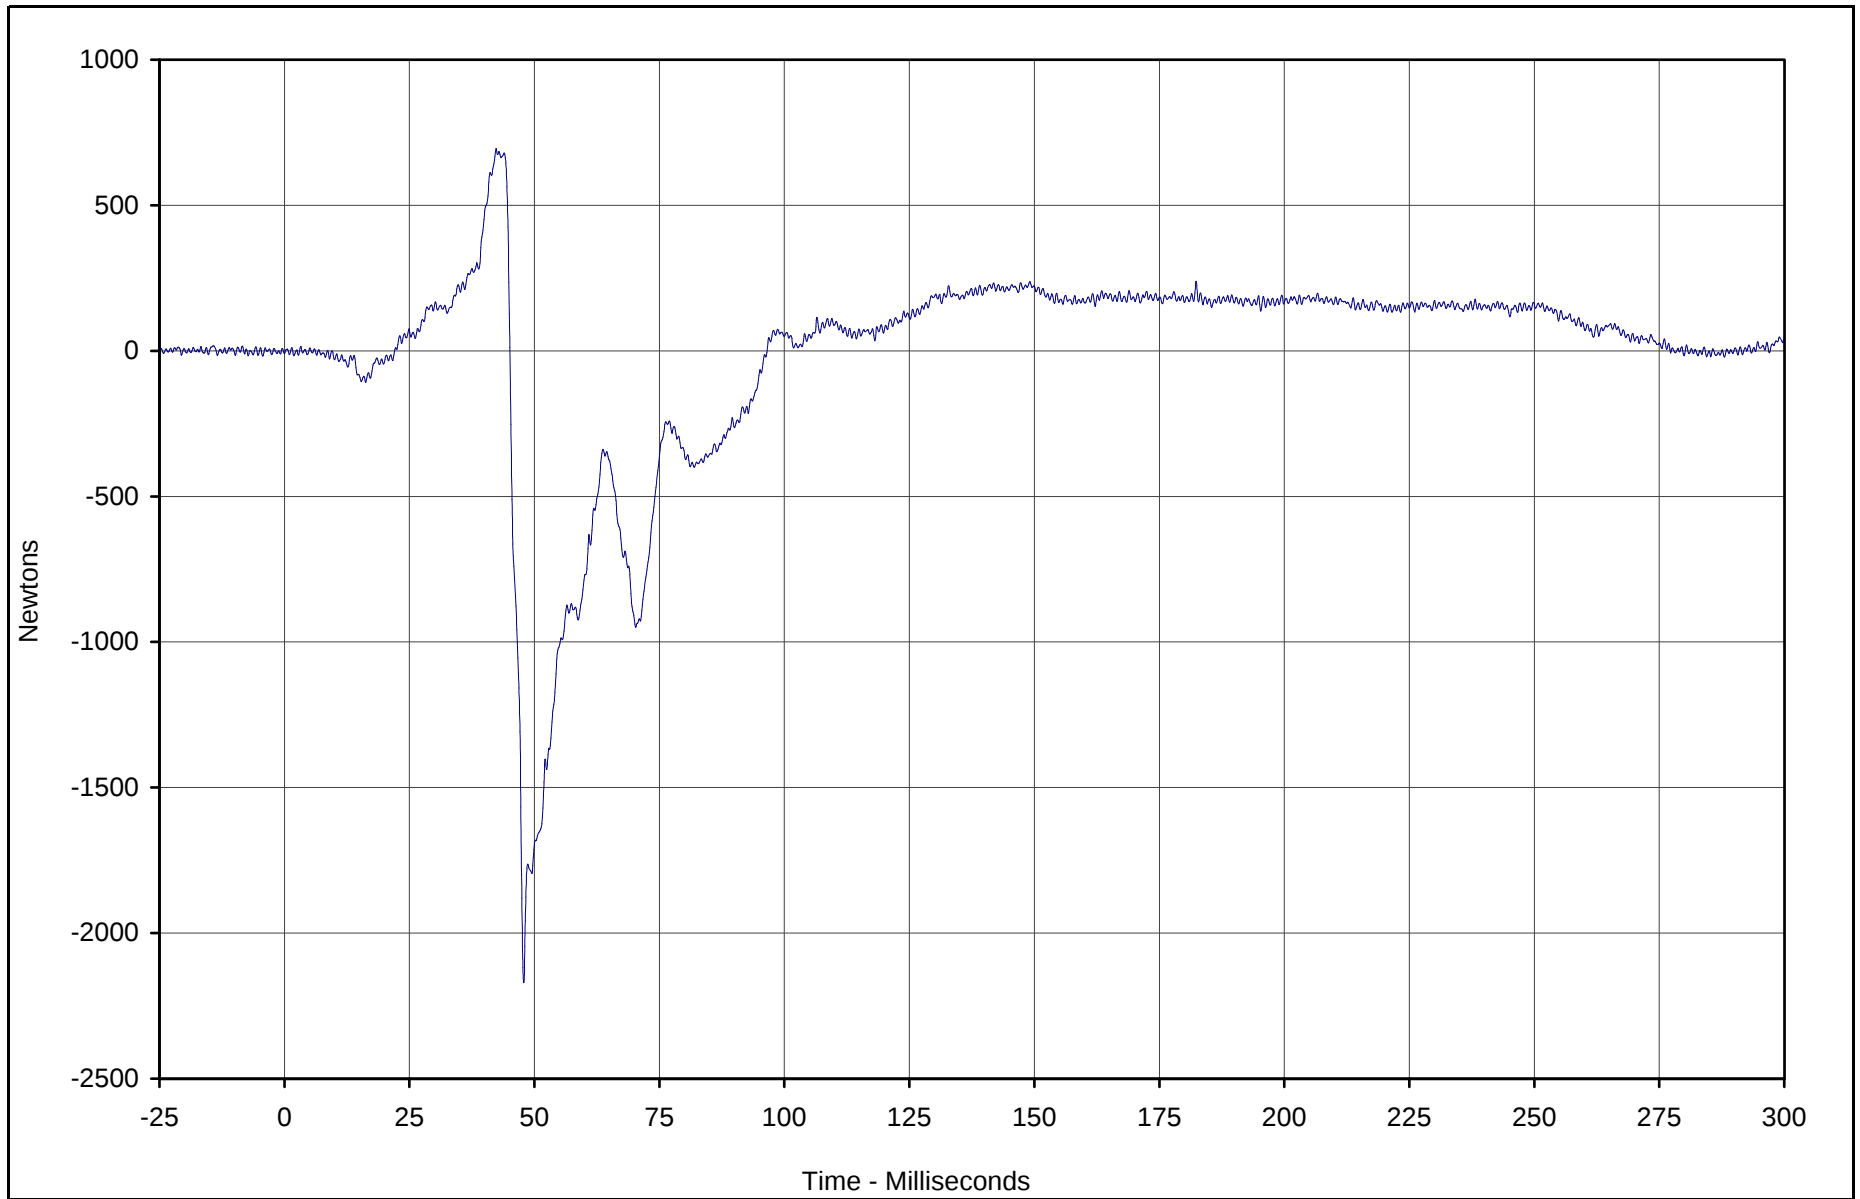

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Left Femur Force	023	FIL	Newtons	694.6	42.3	-2170.1	47.8	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

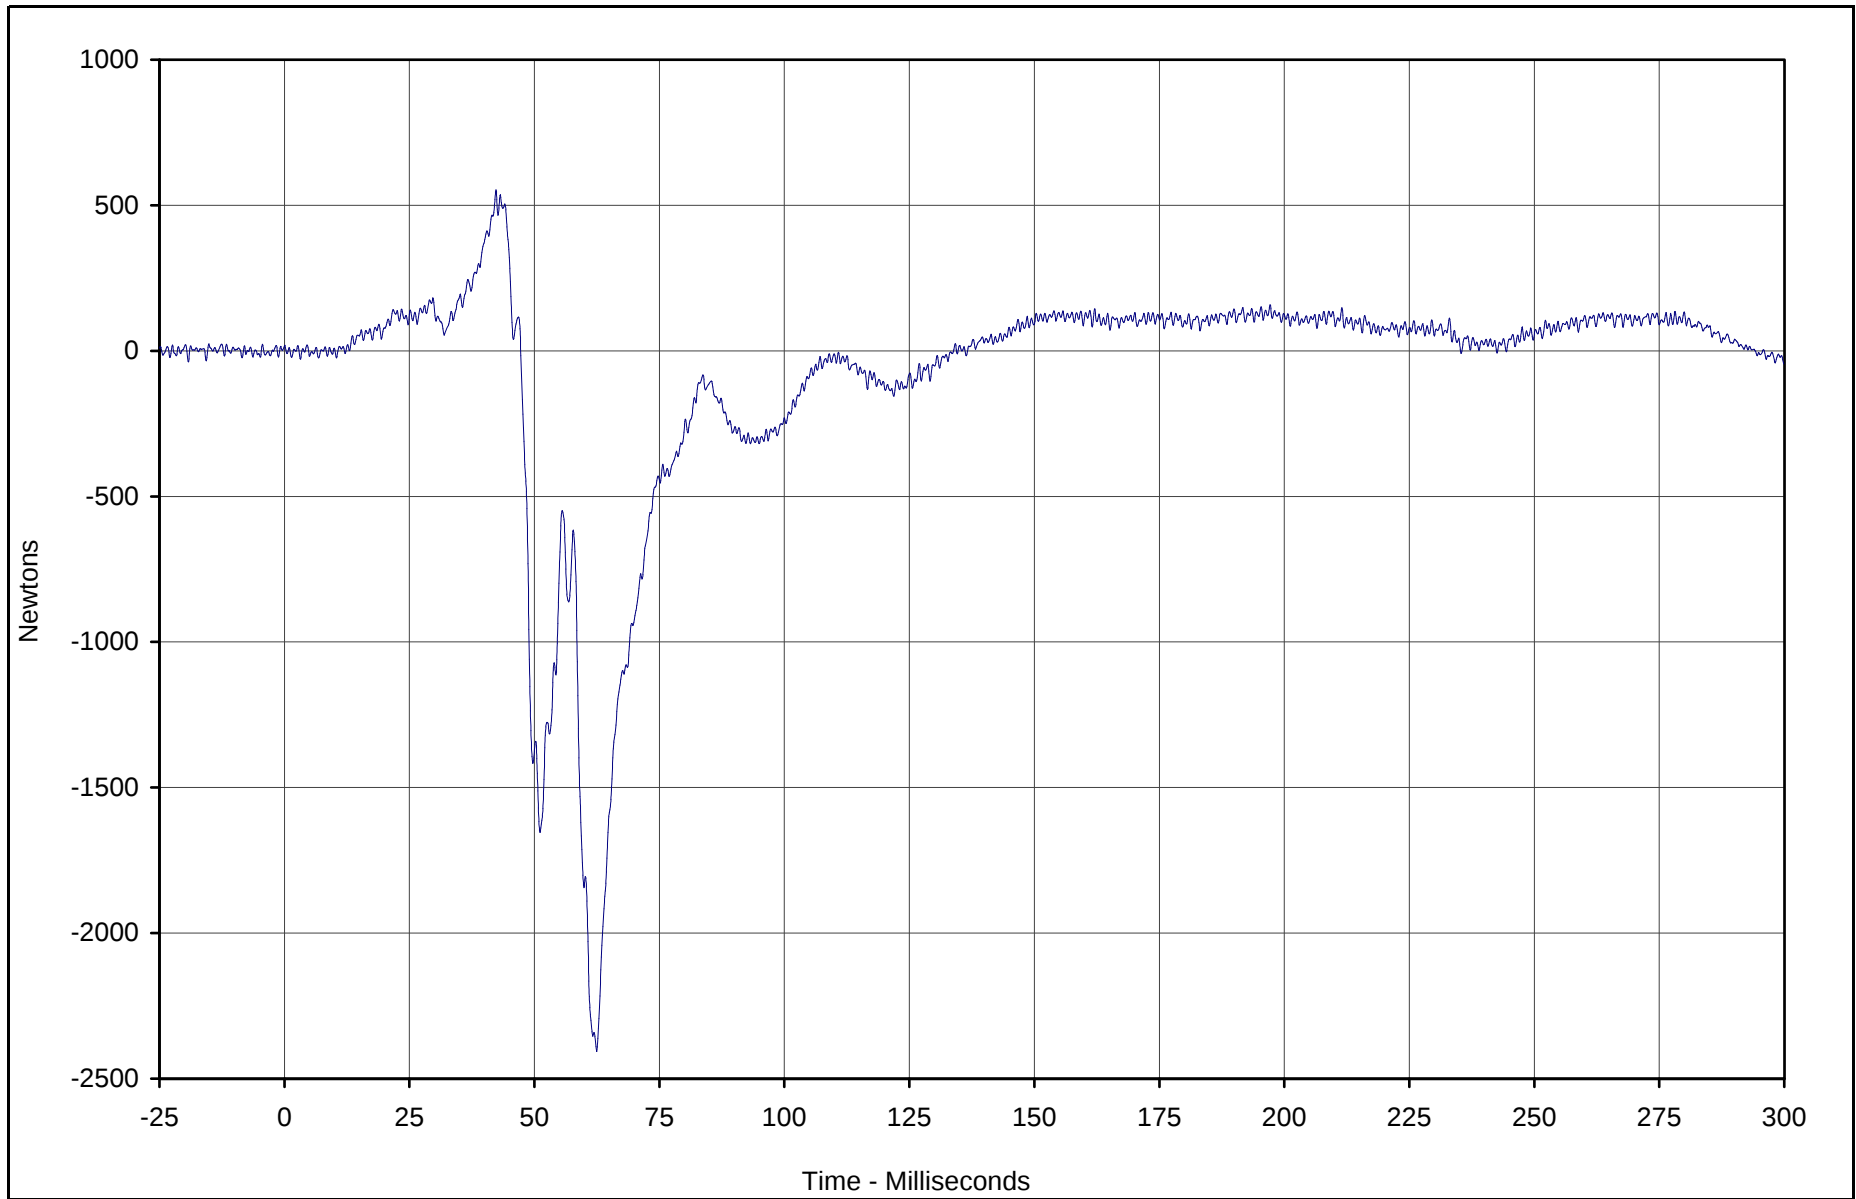

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Right Femur Force	024	FIL	Newtons	553.2	42.3	-2406.7	62.5	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

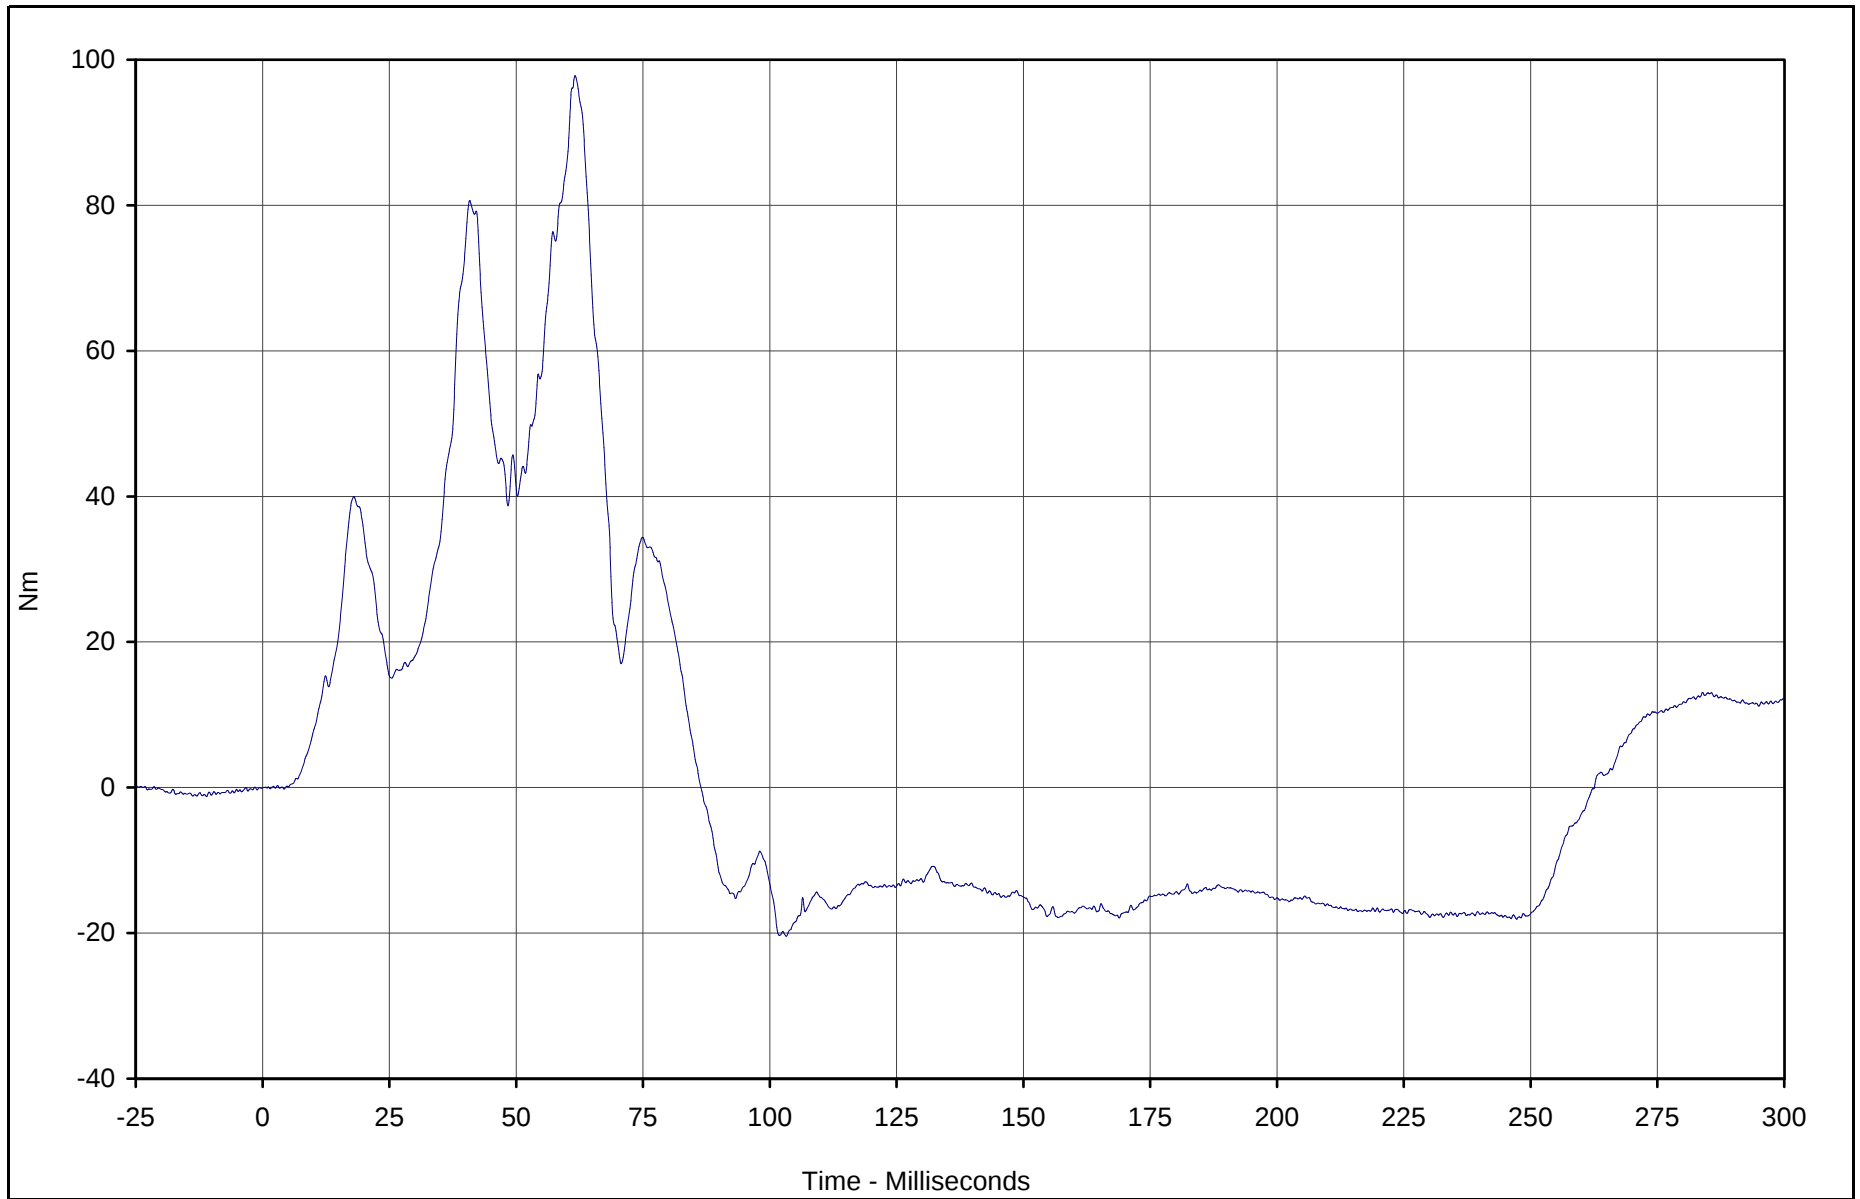

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Left Upper Tibia Moment X	025	FIL	Nm	97.8	61.6	-20.4	103.3	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

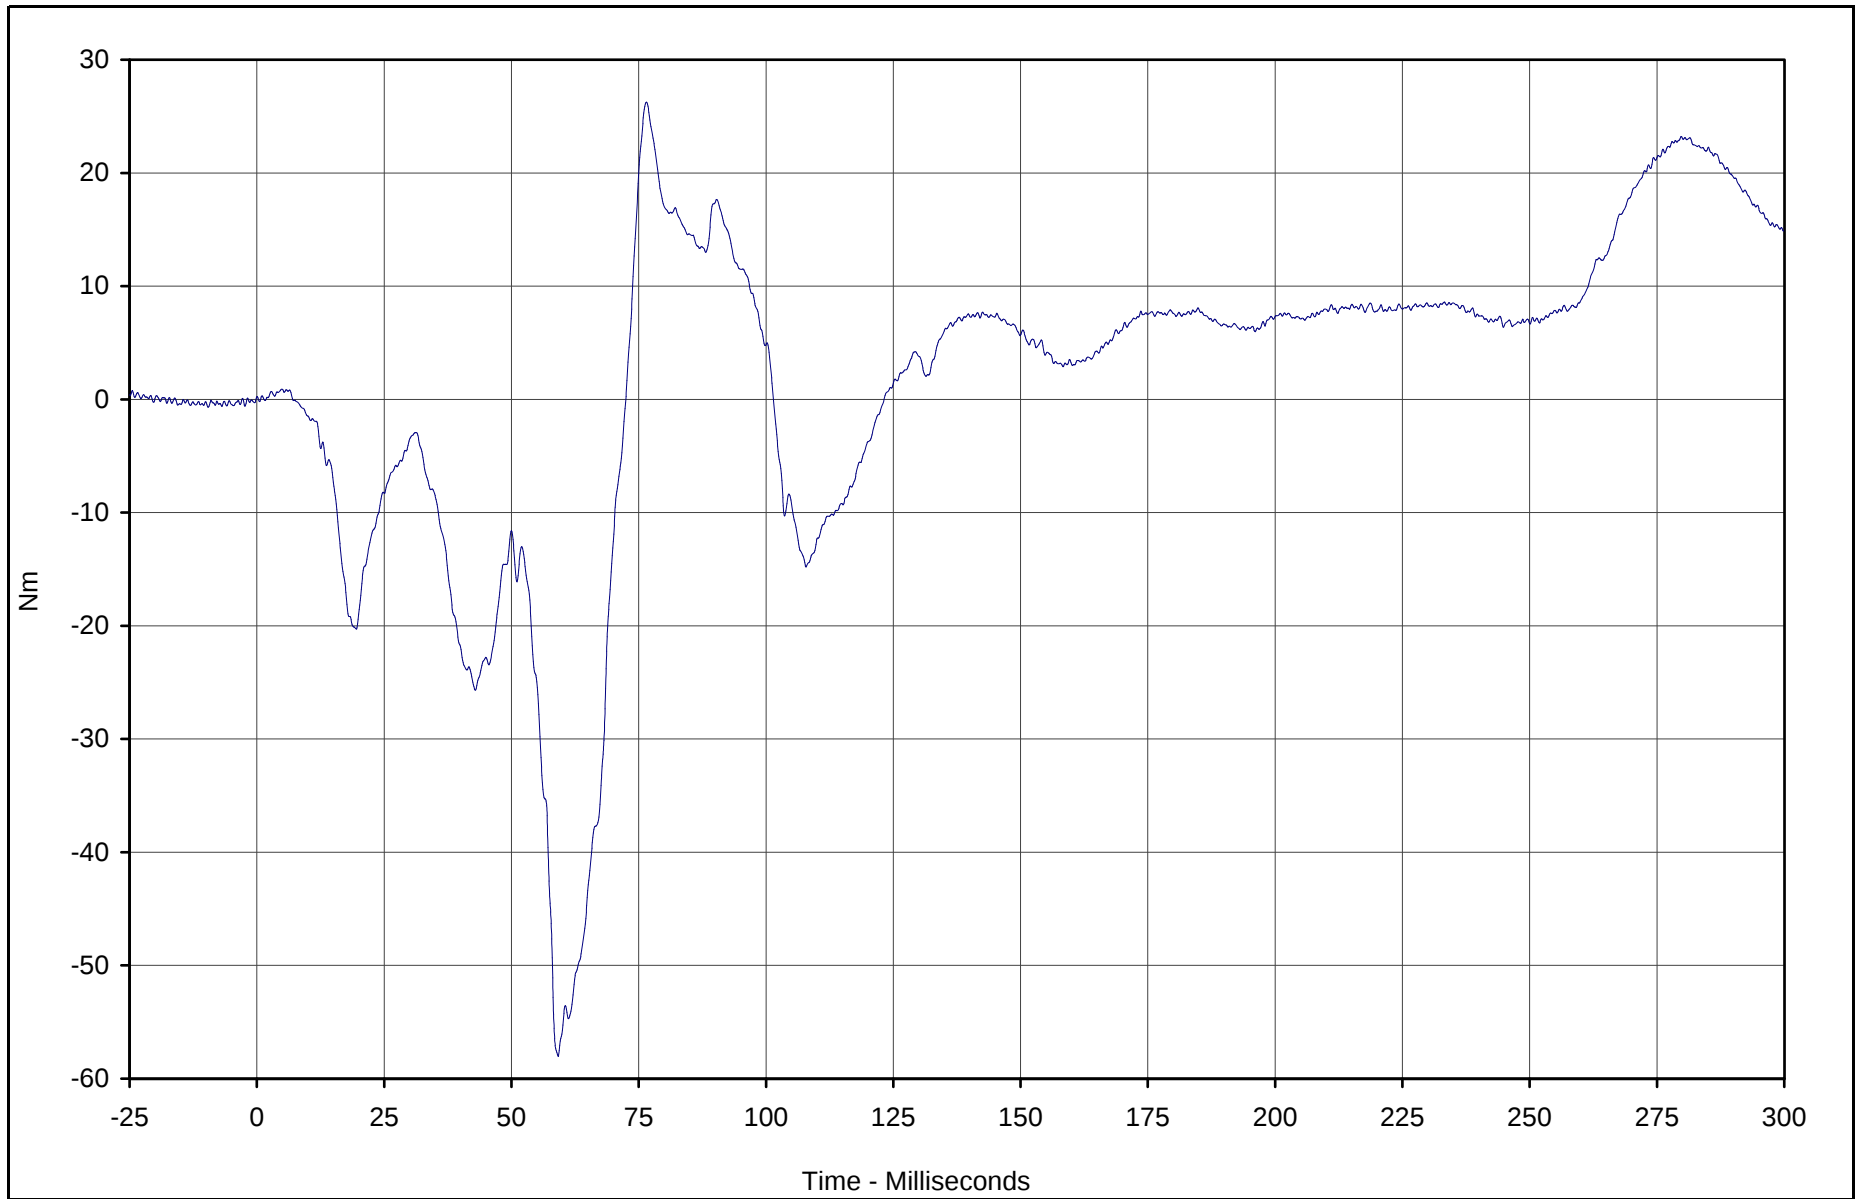

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Left Upper Tibia Moment Y	026	FIL	Nm	26.2	76.5	-58.0	59.2	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

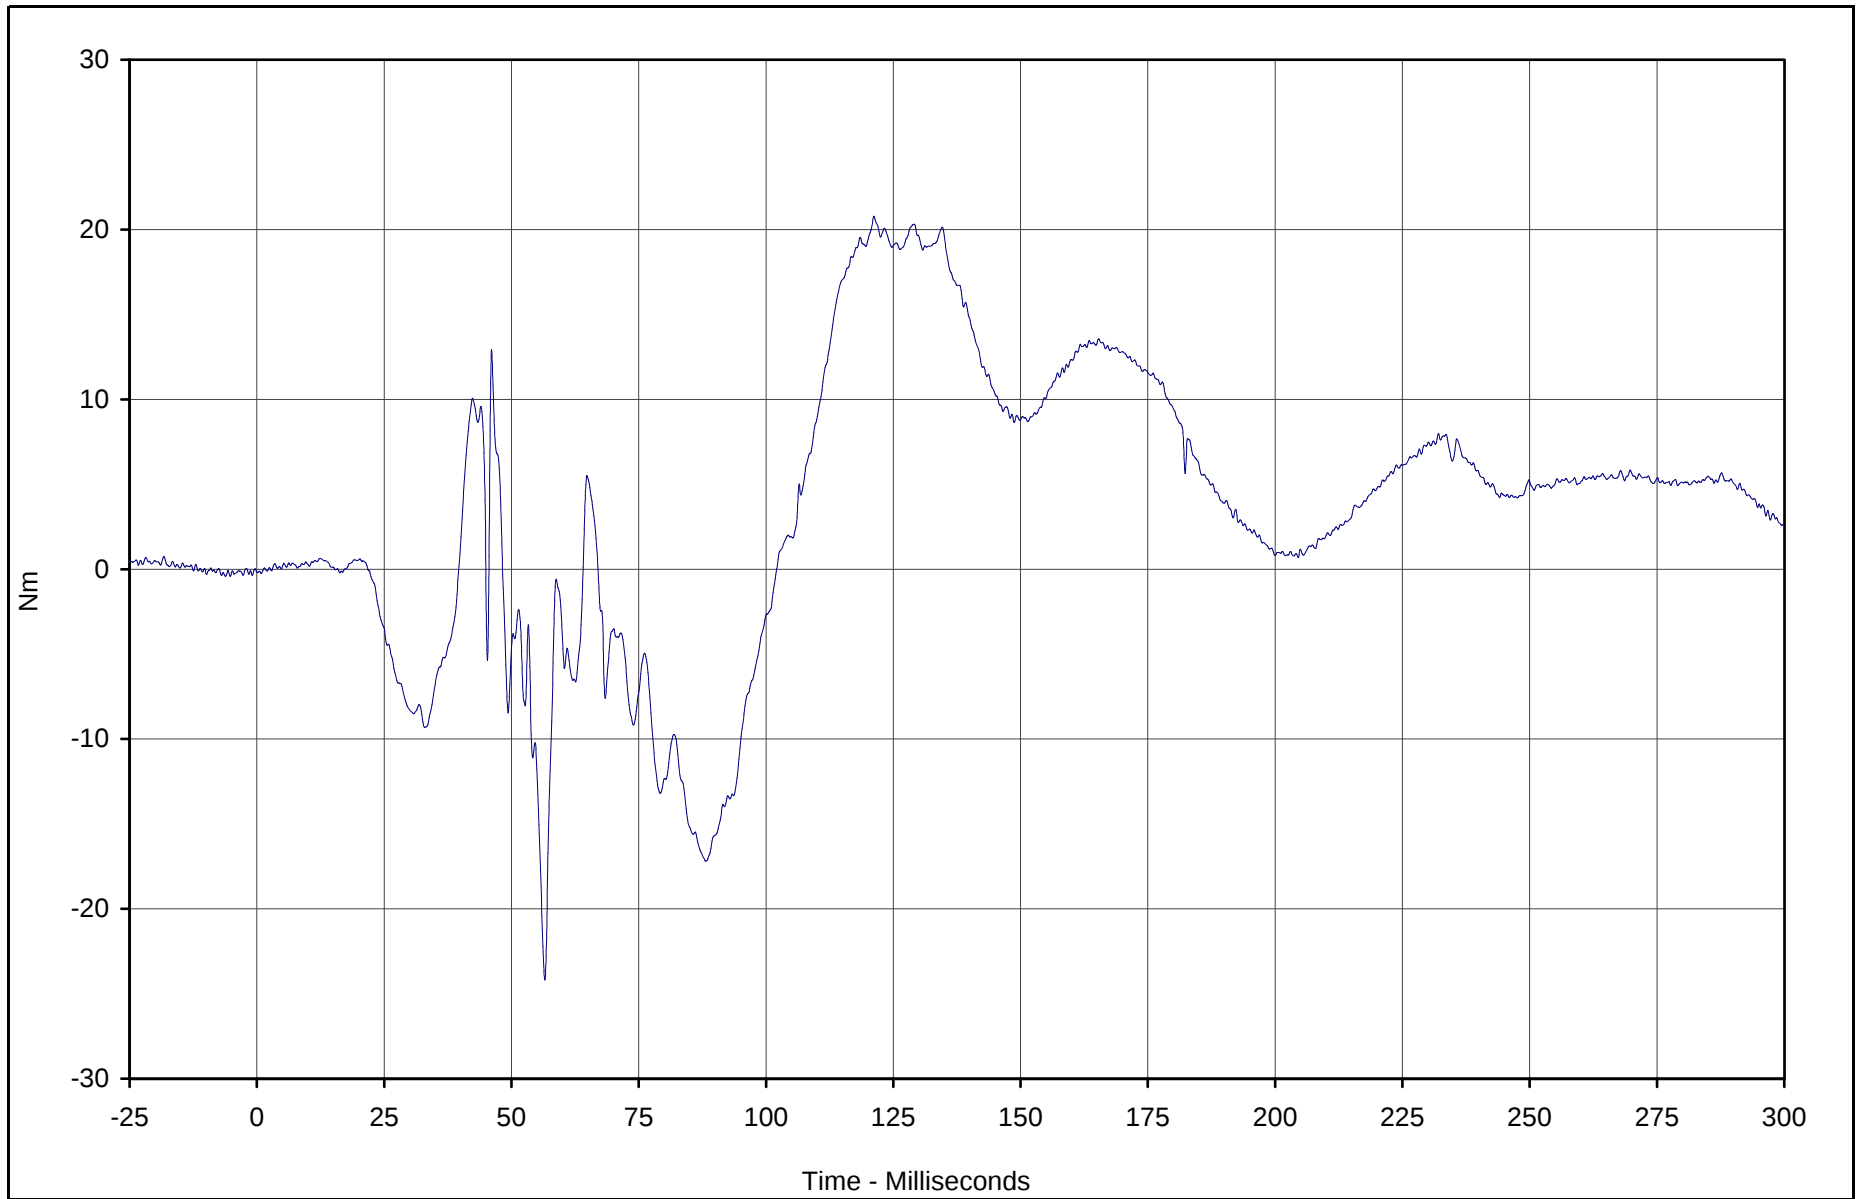

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Right Upper Tibia Moment X	027	FIL	Nm	20.8	121.2	-24.2	56.6	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

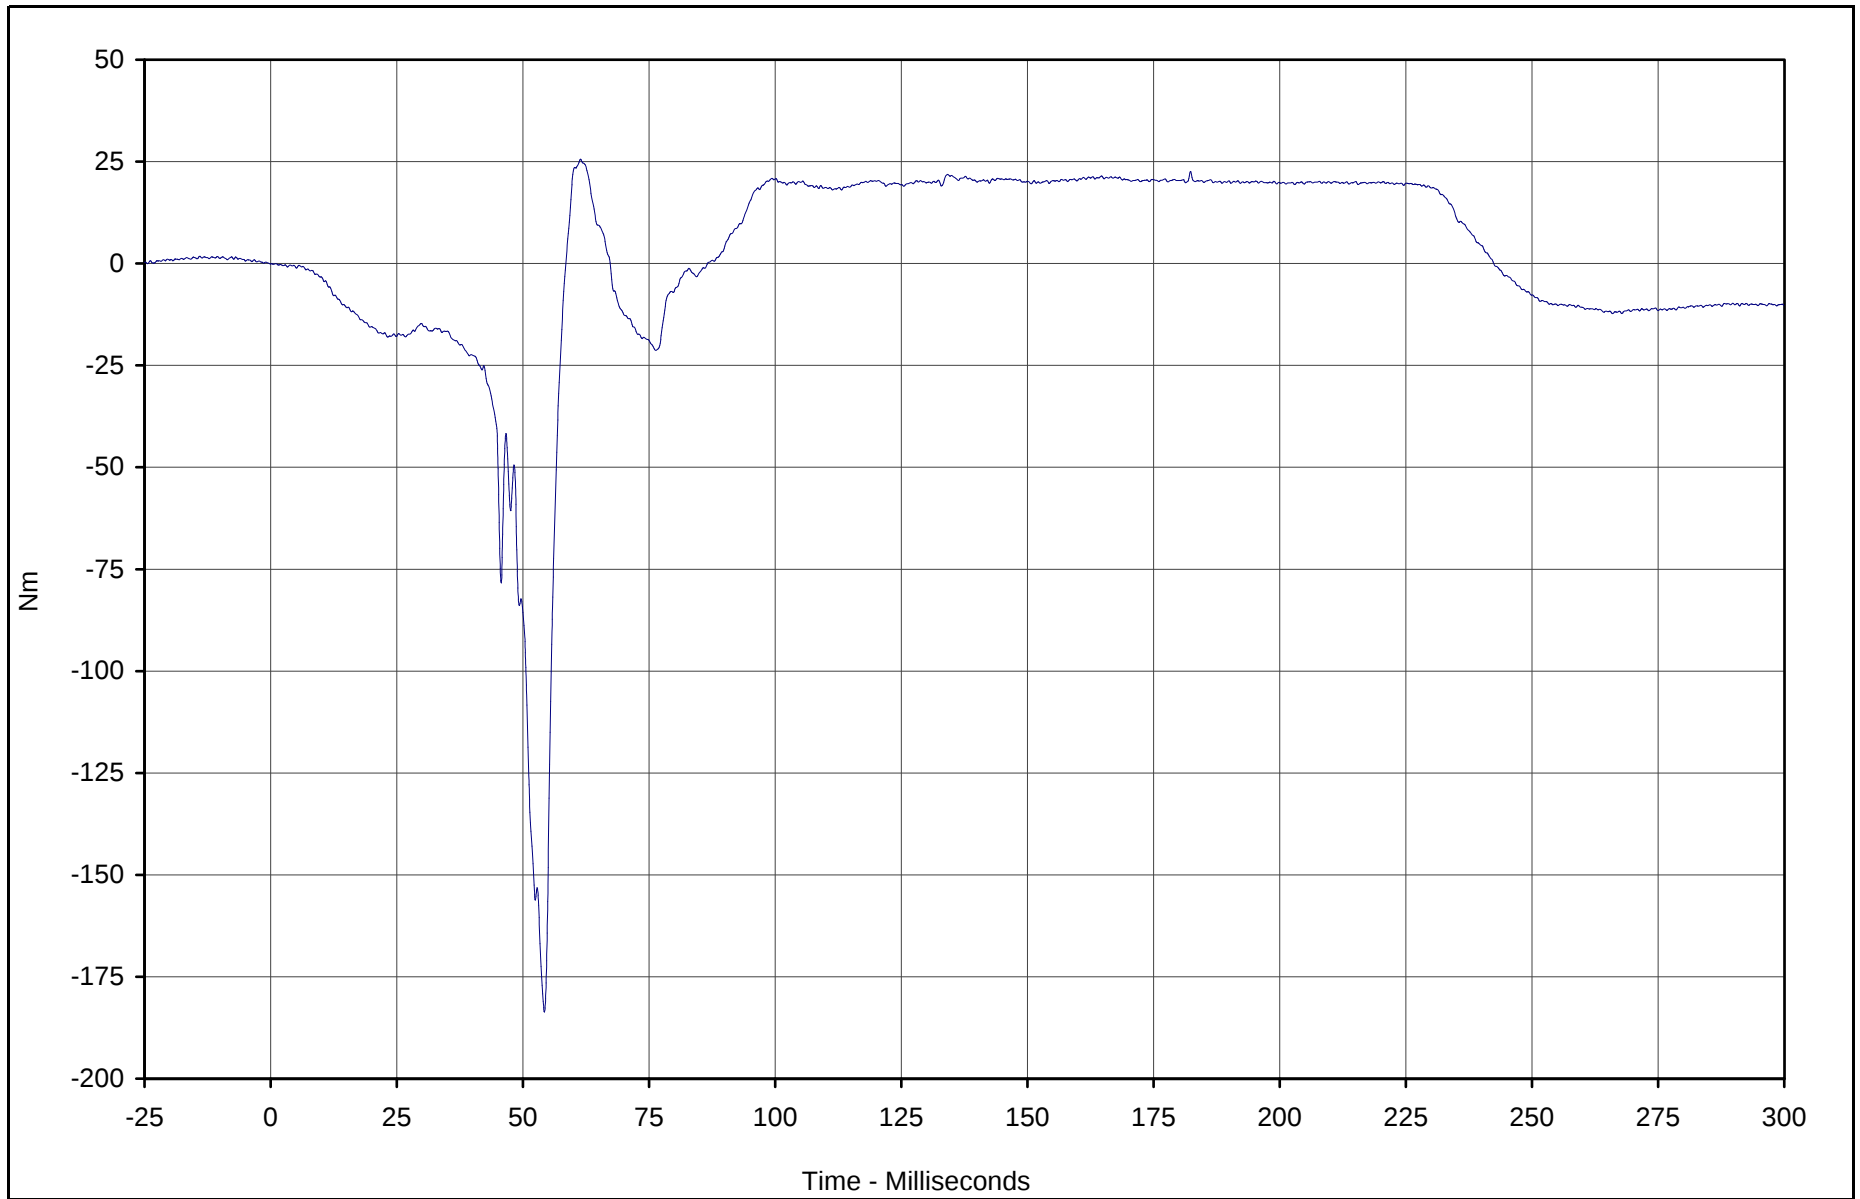

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Right Upper Tibia Moment Y	028	FIL	Nm	25.6	61.4	-183.6	54.3	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

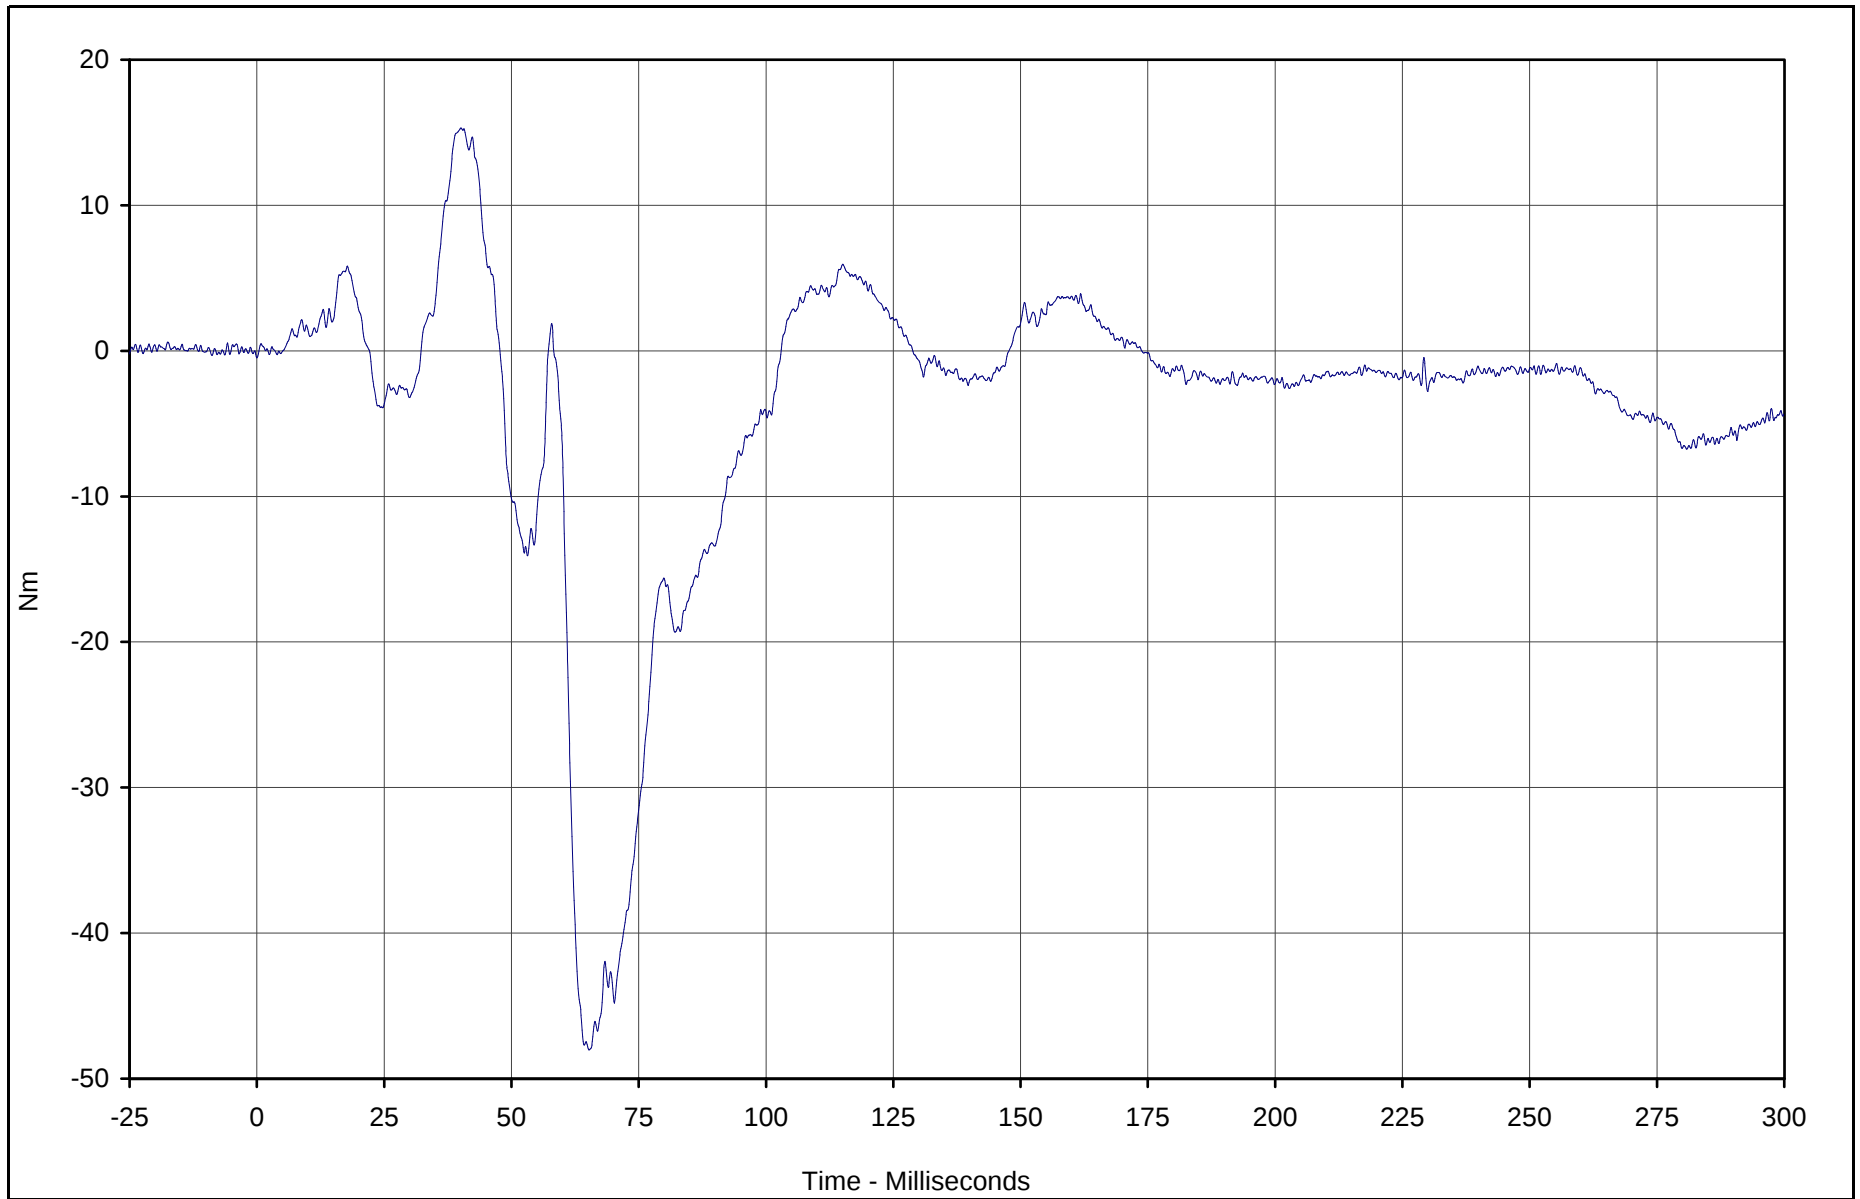

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Left Lower Tibia Moment X	029	FIL	Nm	15.3	40.1	-48.0	65.3	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

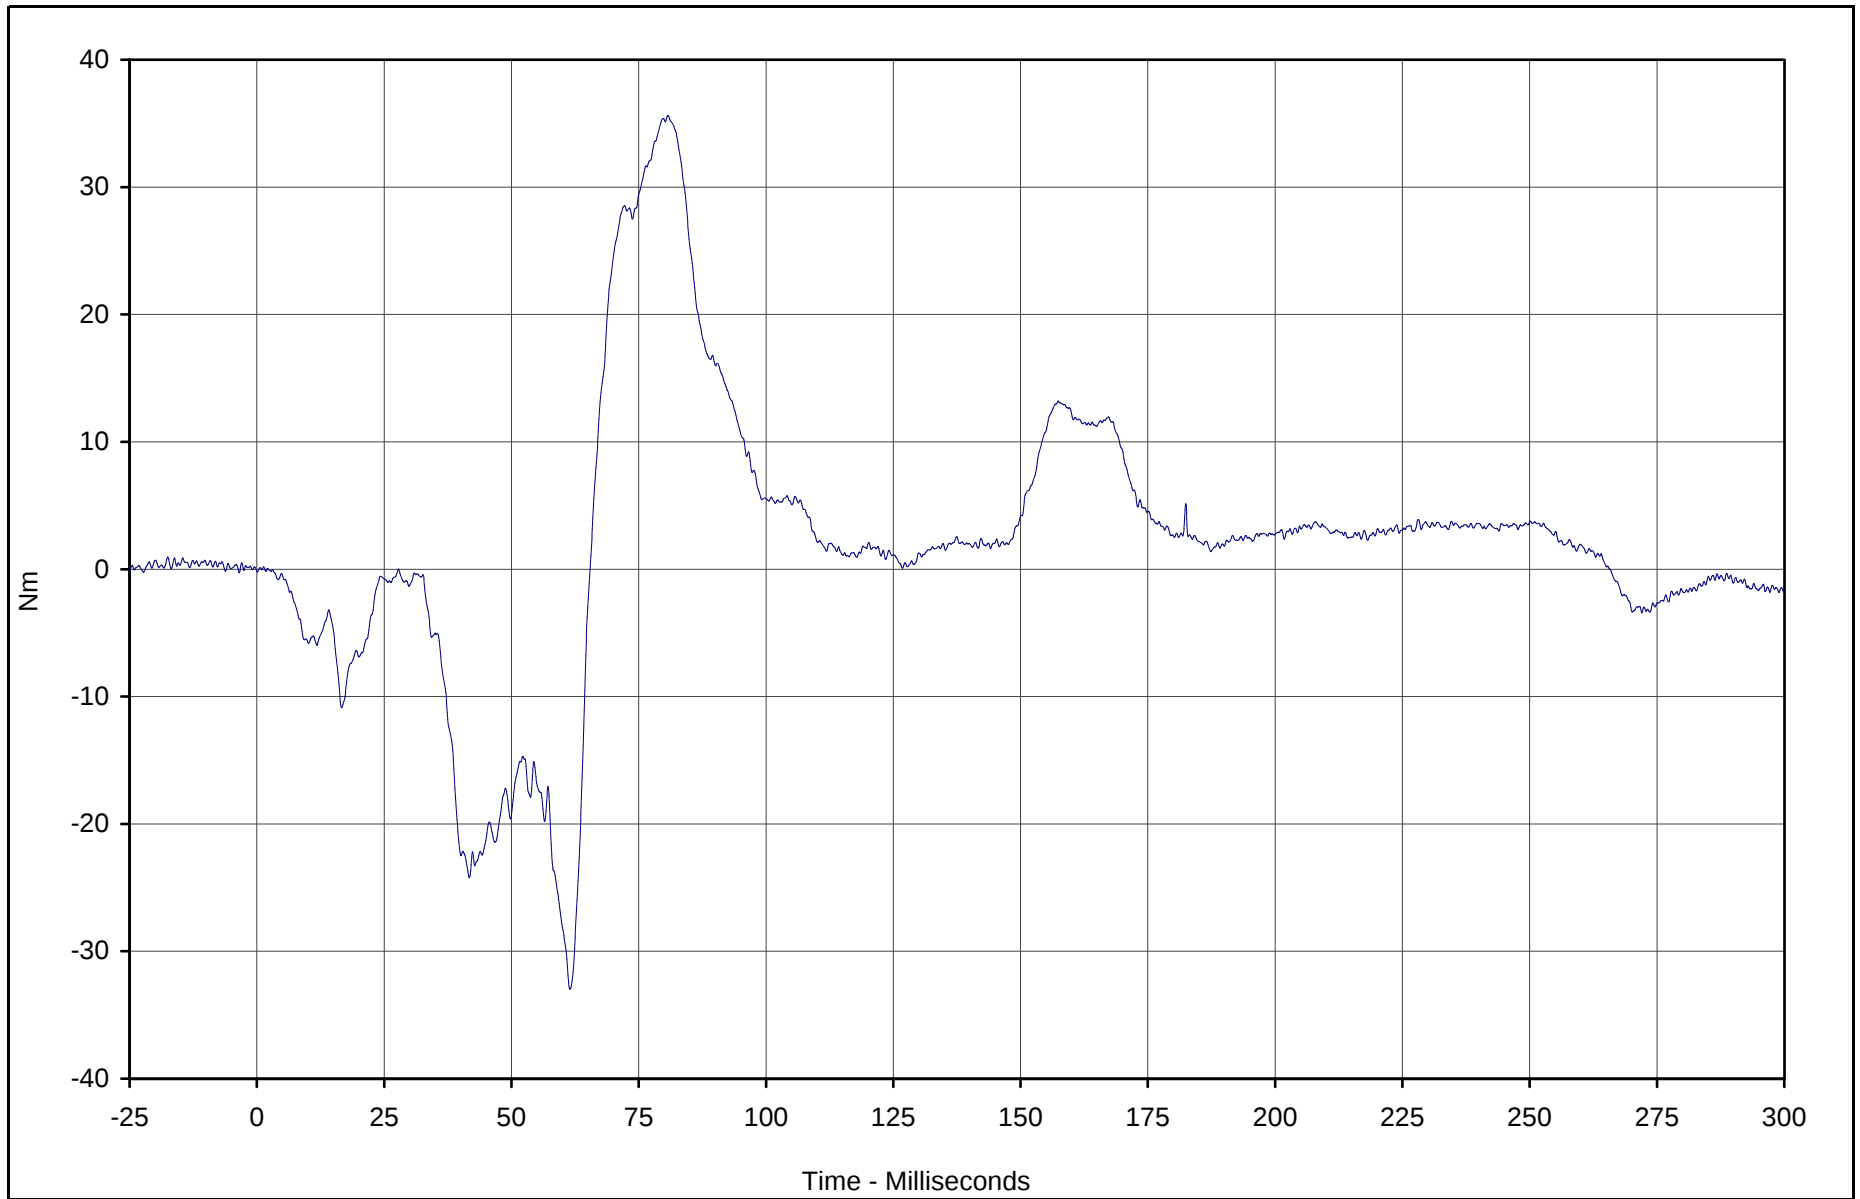


Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

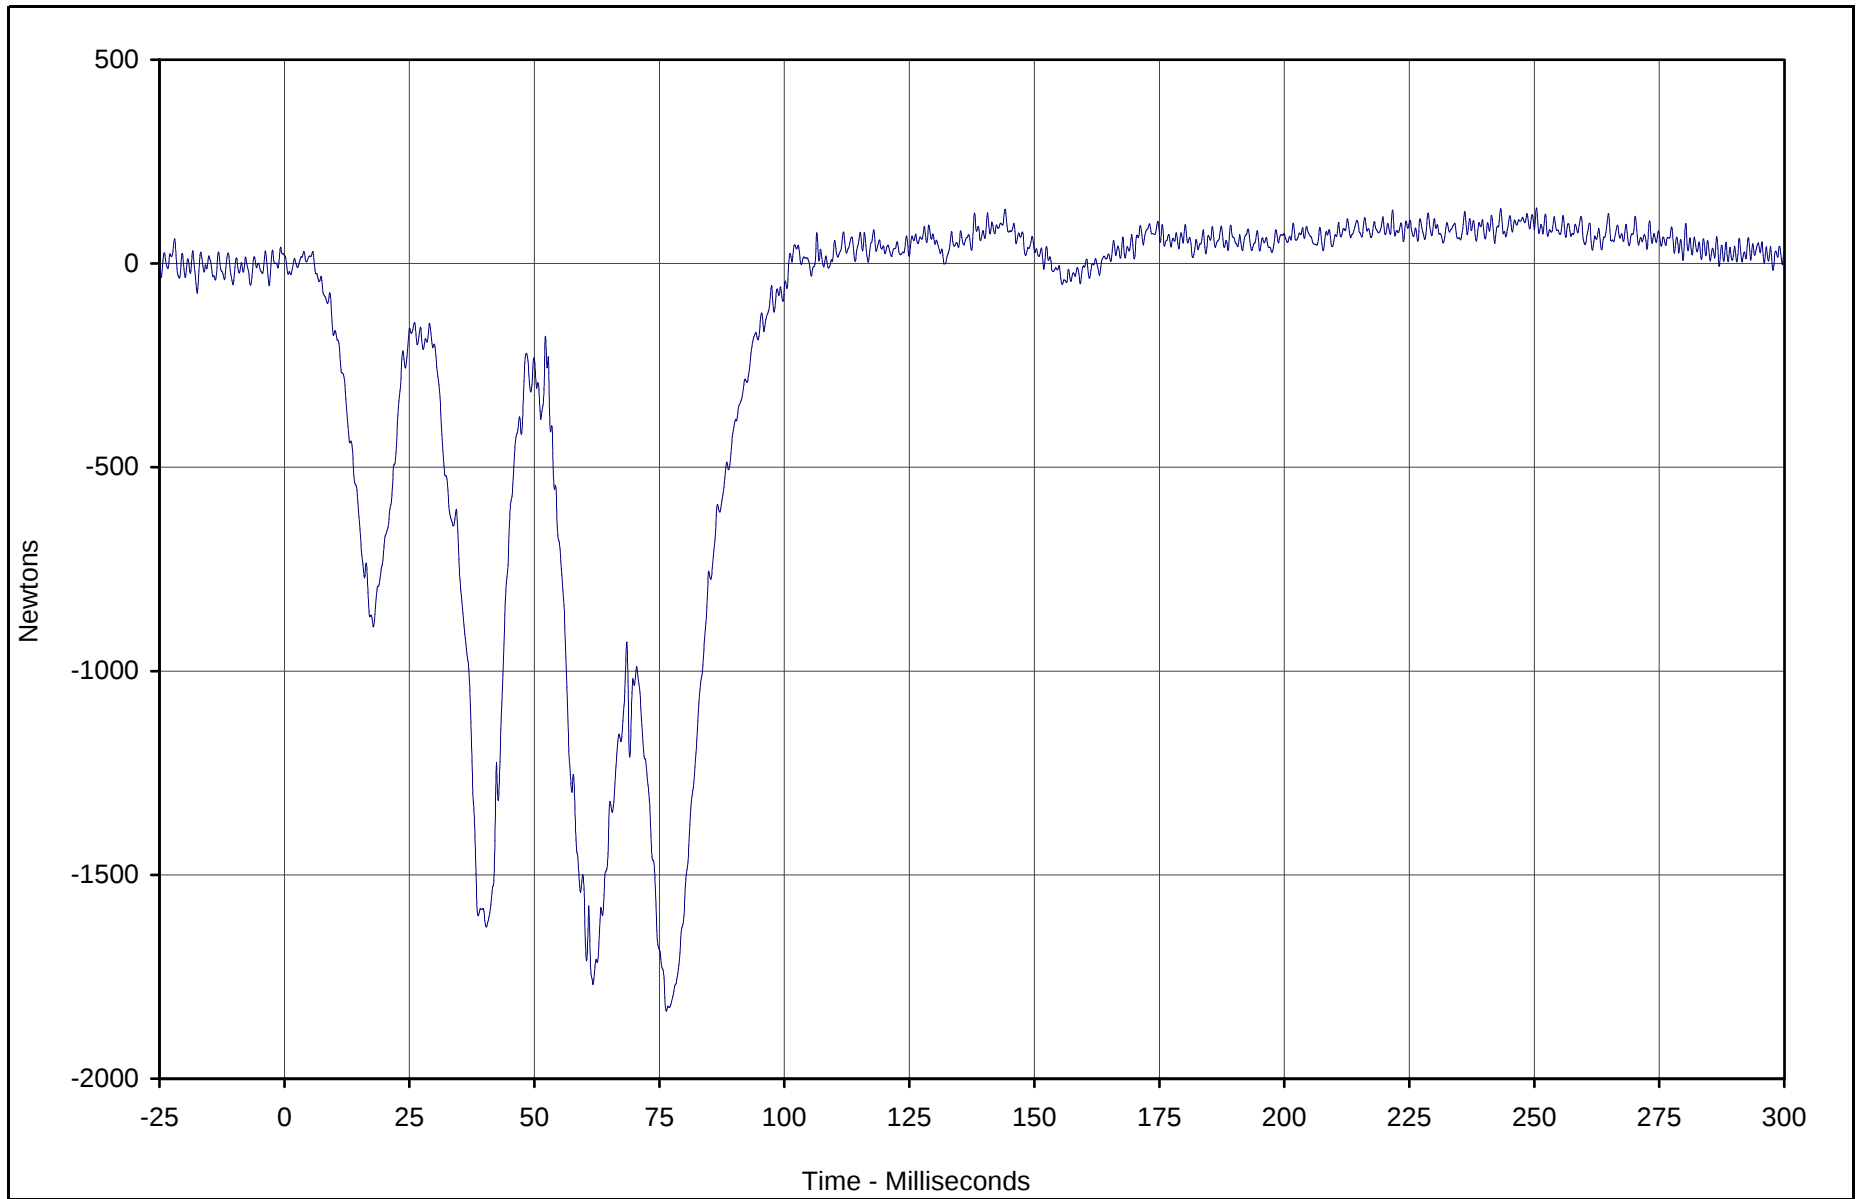

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Left Lower Tibia Force Z	031	FIL	Newtons	136.3	250.4	-1834.5	76.4	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

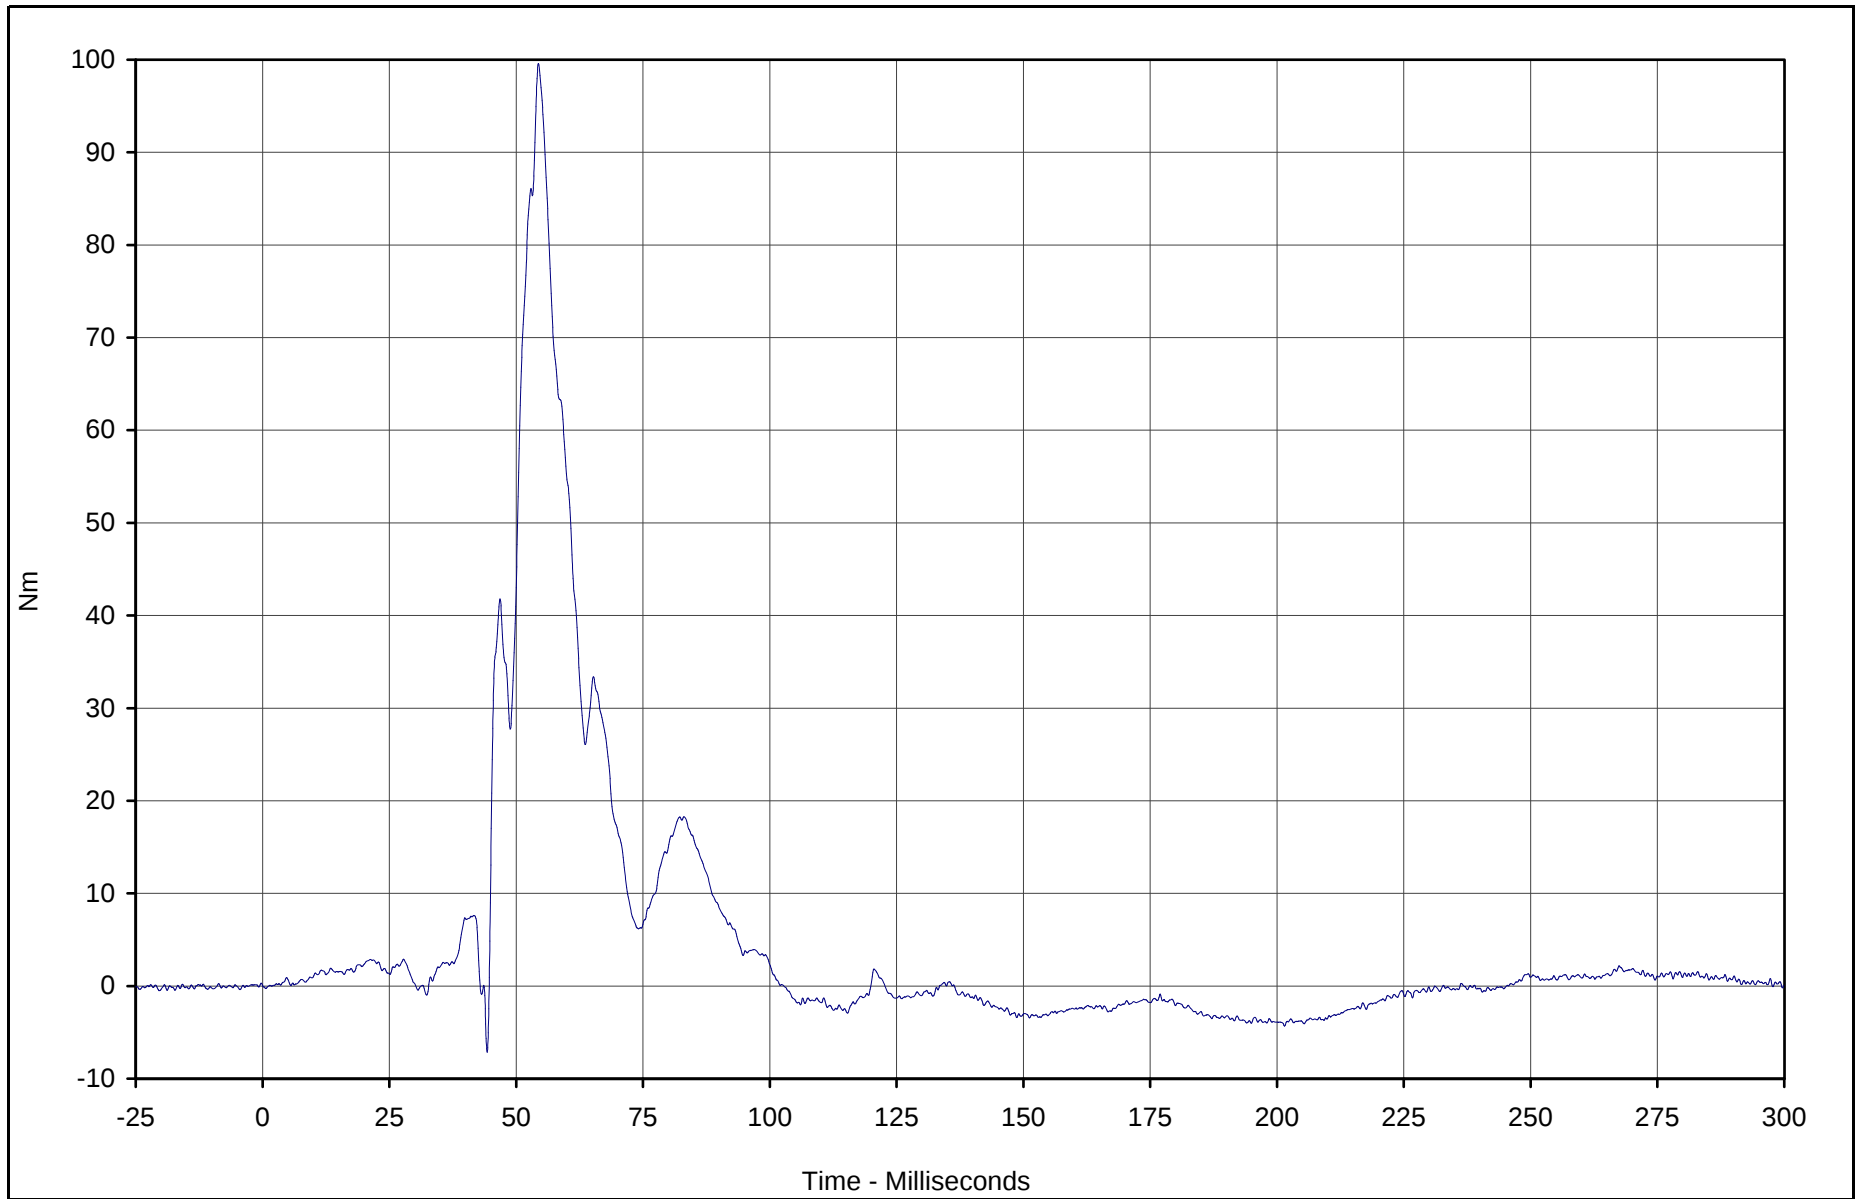

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Right Lower Tibia Moment X	032	FIL	Nm	99.6	54.4	-7.2	44.3	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

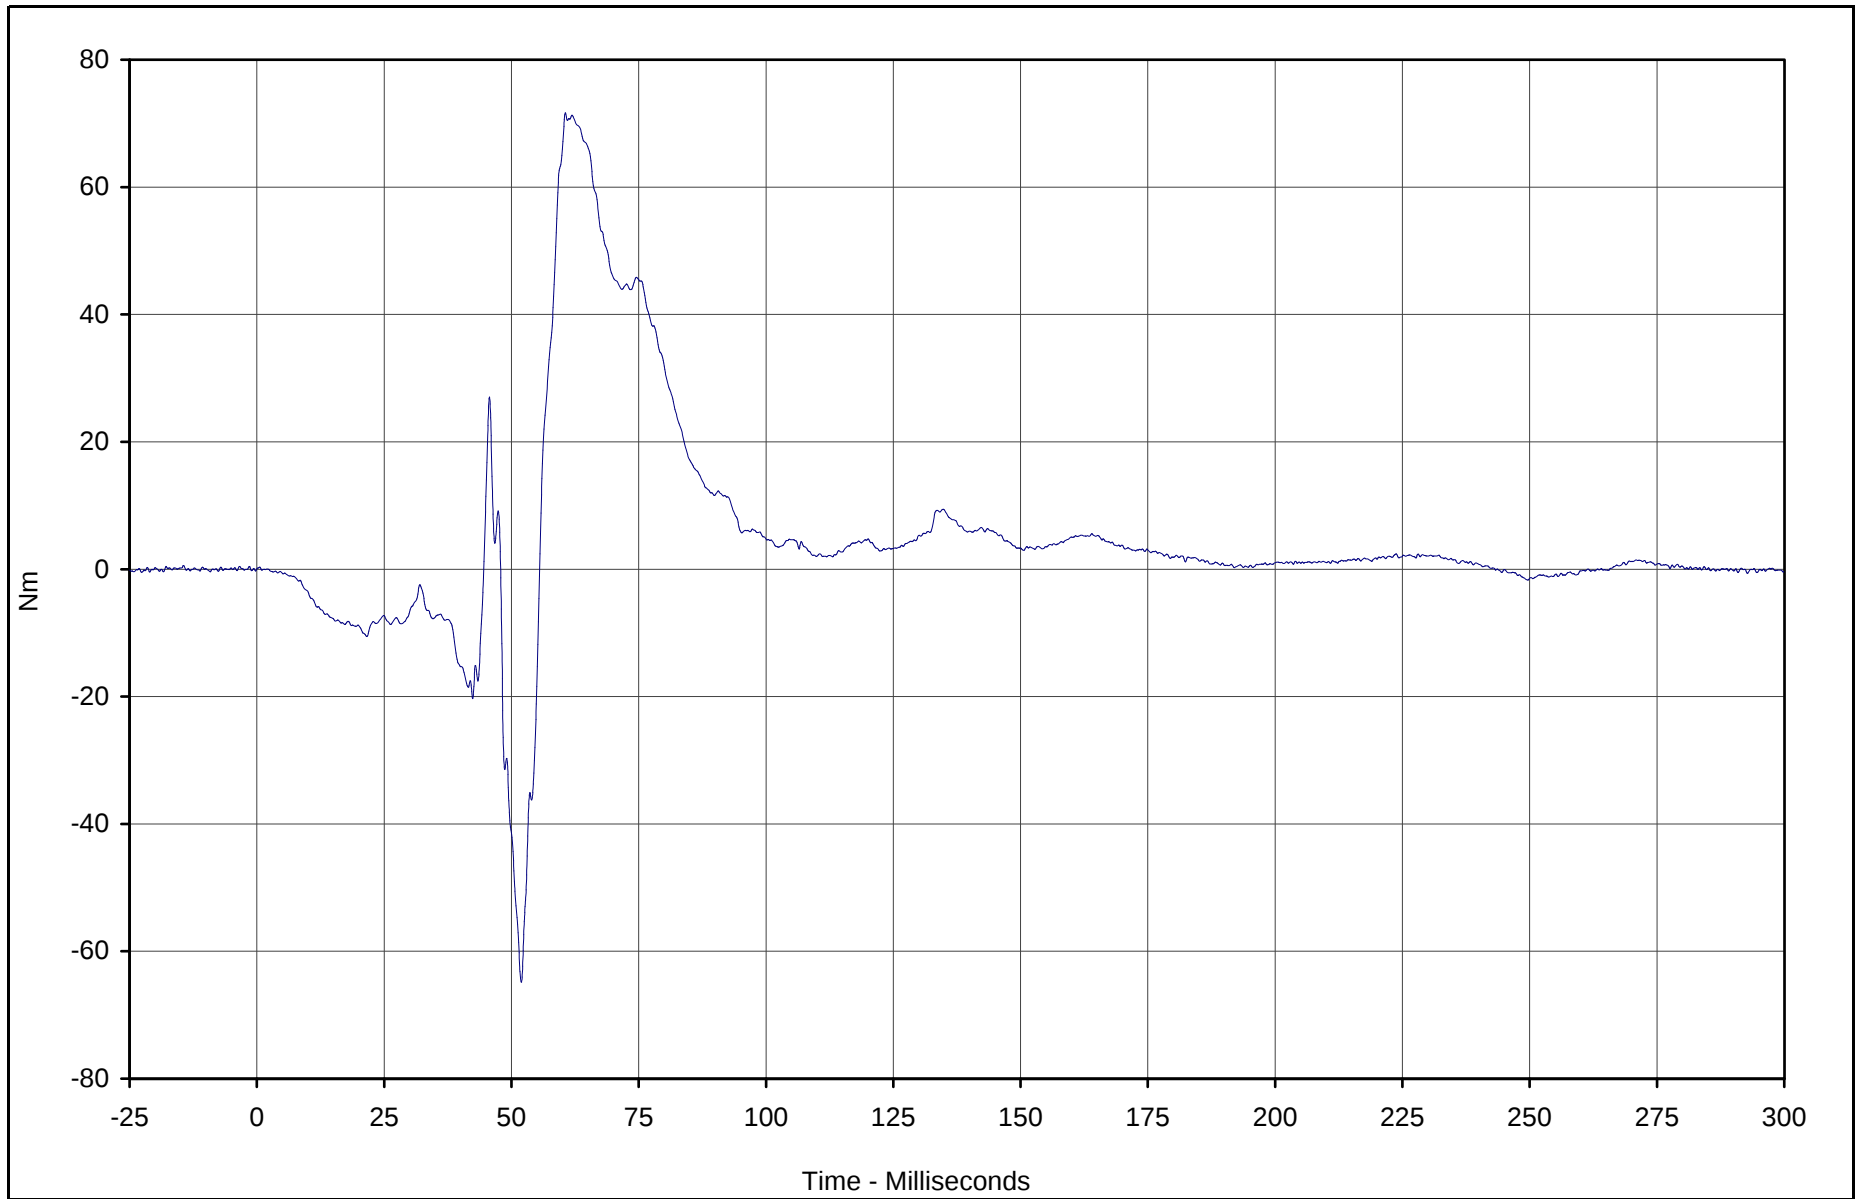

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Right Lower Tibia Moment Y	033	FIL	Nm	71.7	60.6	-64.8	52.0	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

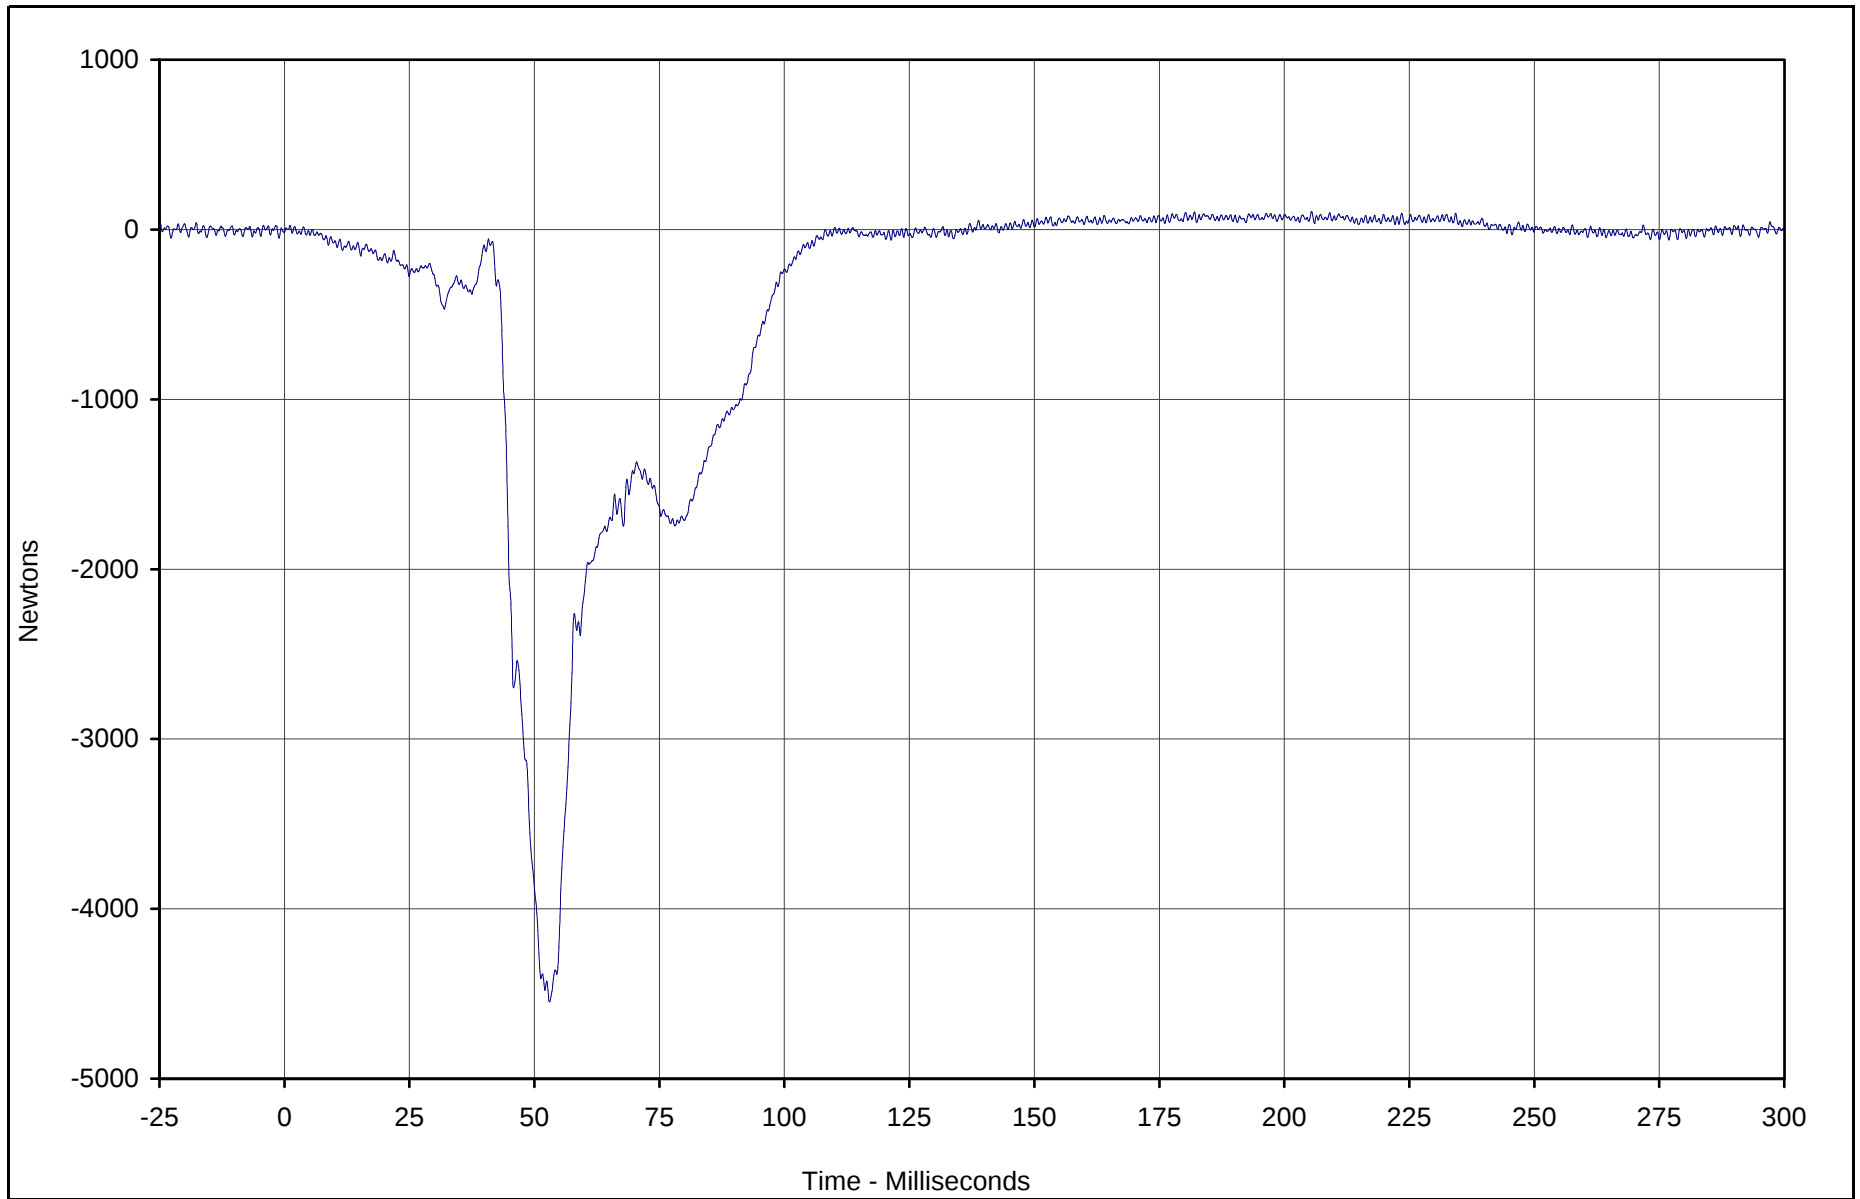

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Right Lower Tibia Force Z	034	FIL	Newtons	106.4	205.5	-4548.4	53.0	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

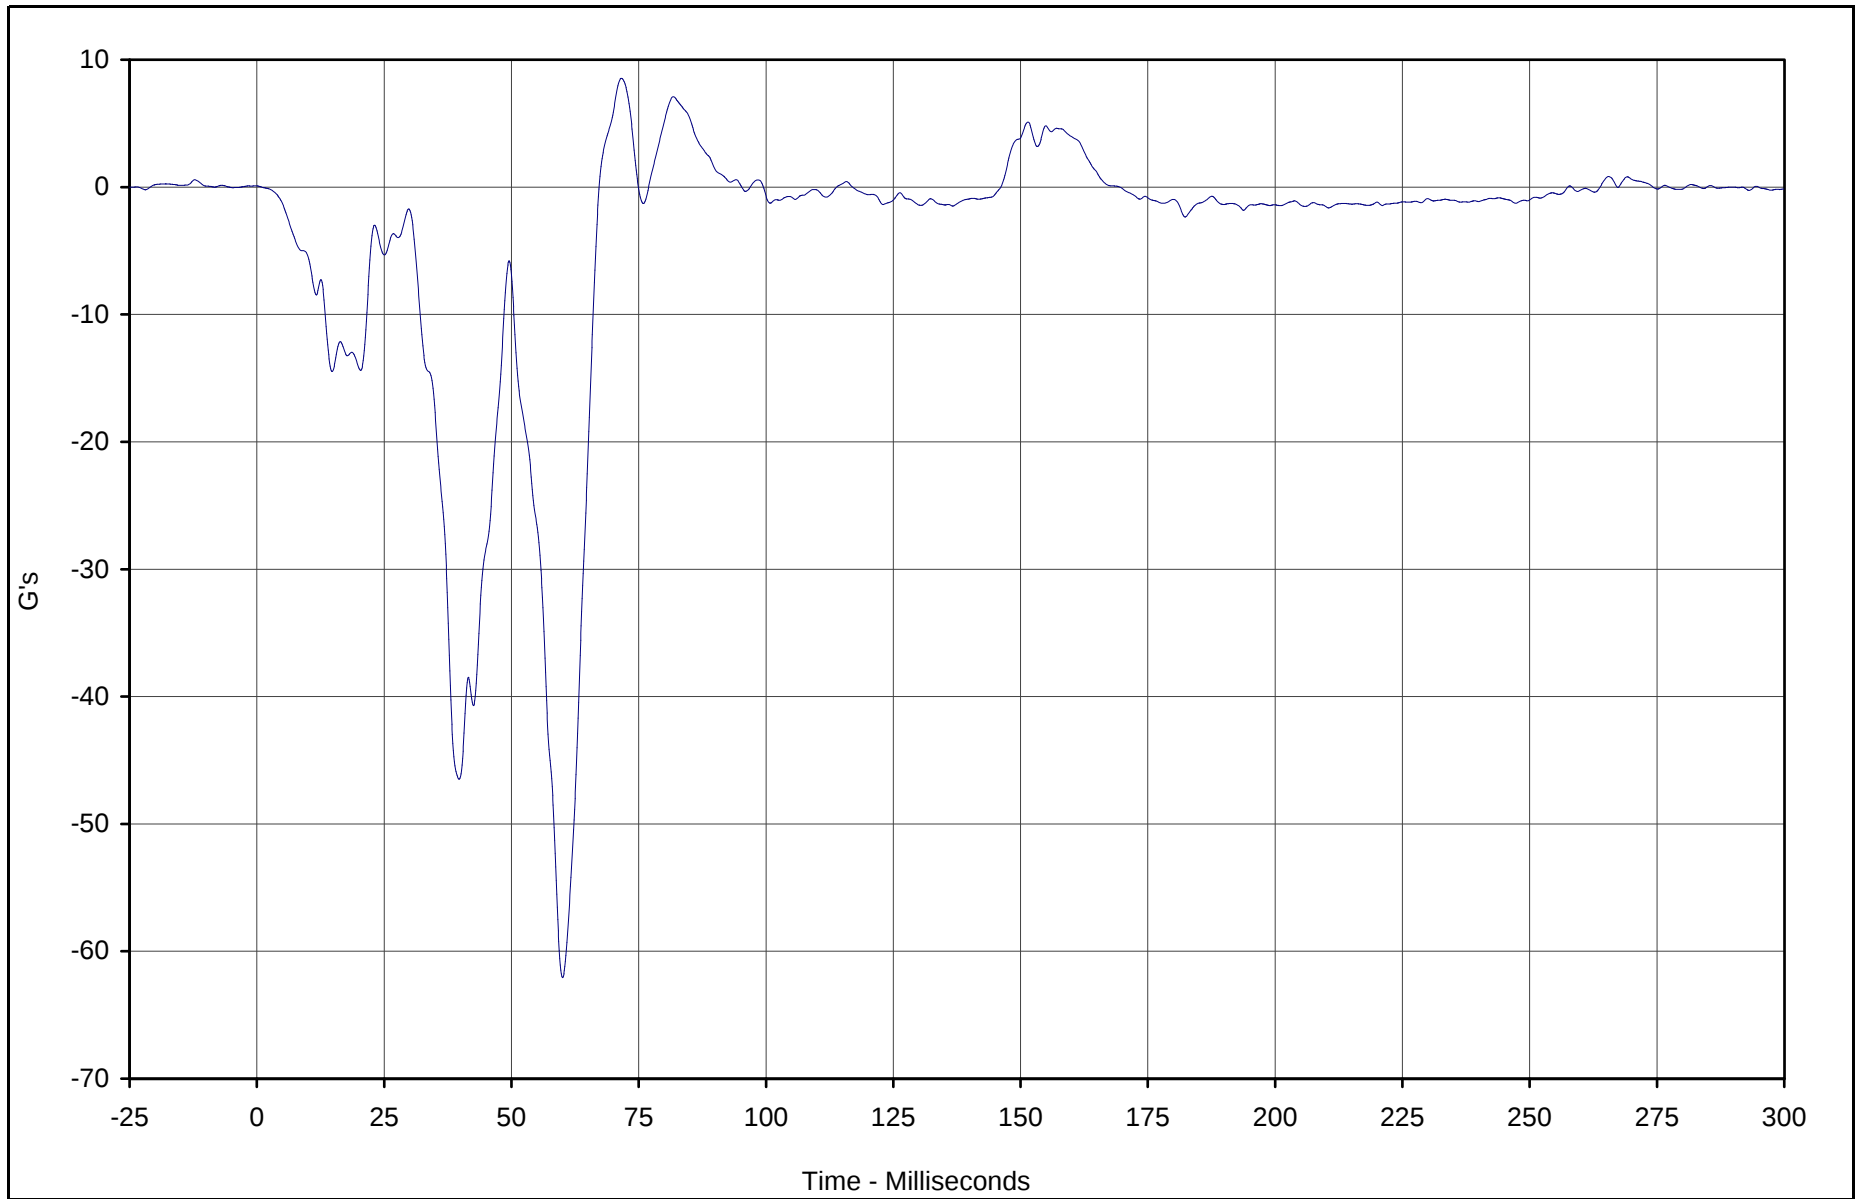

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Left Foot Aft X	035	FIL	G's	8.5	71.6	-62.1	60.0	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

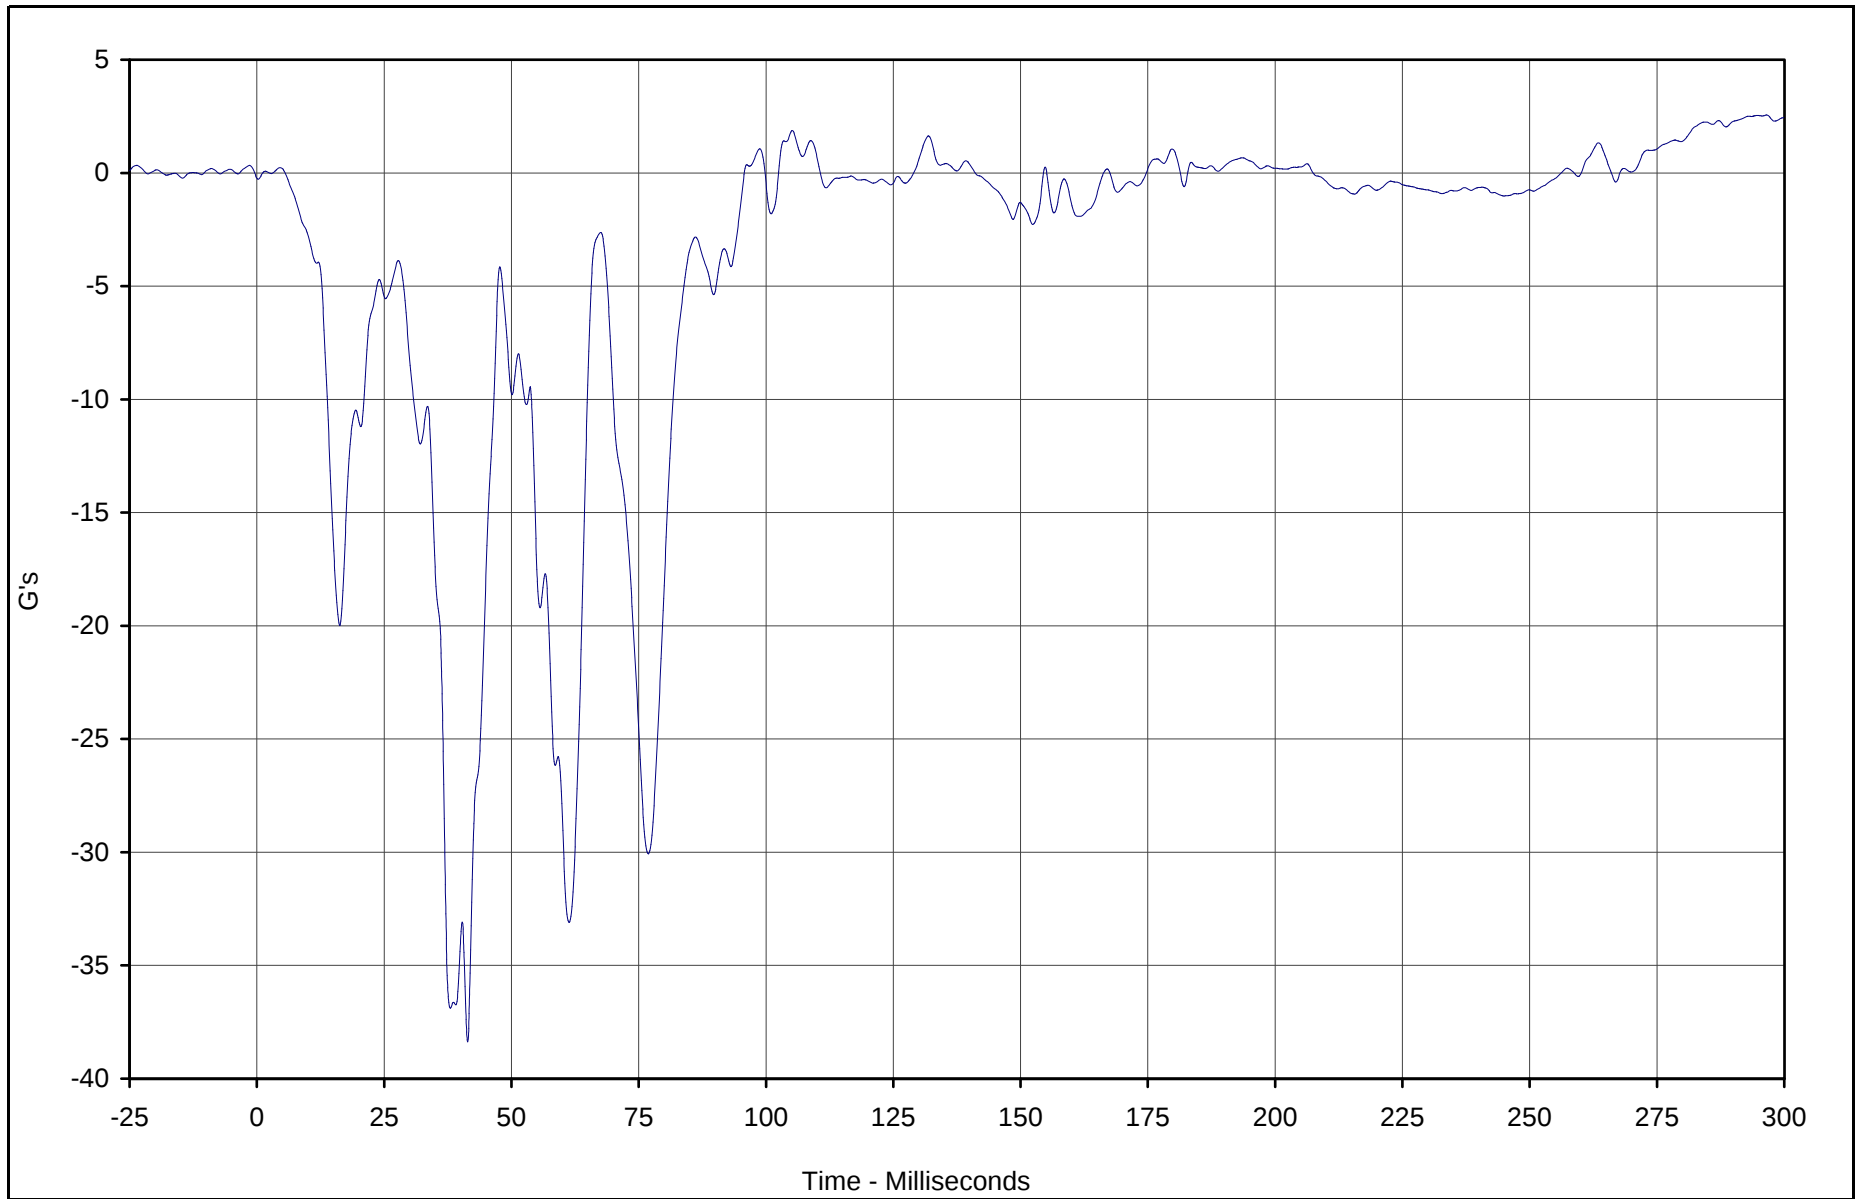

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Left Foot Aft Z	036	FIL	G's	2.6	296.6	-38.4	41.4	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

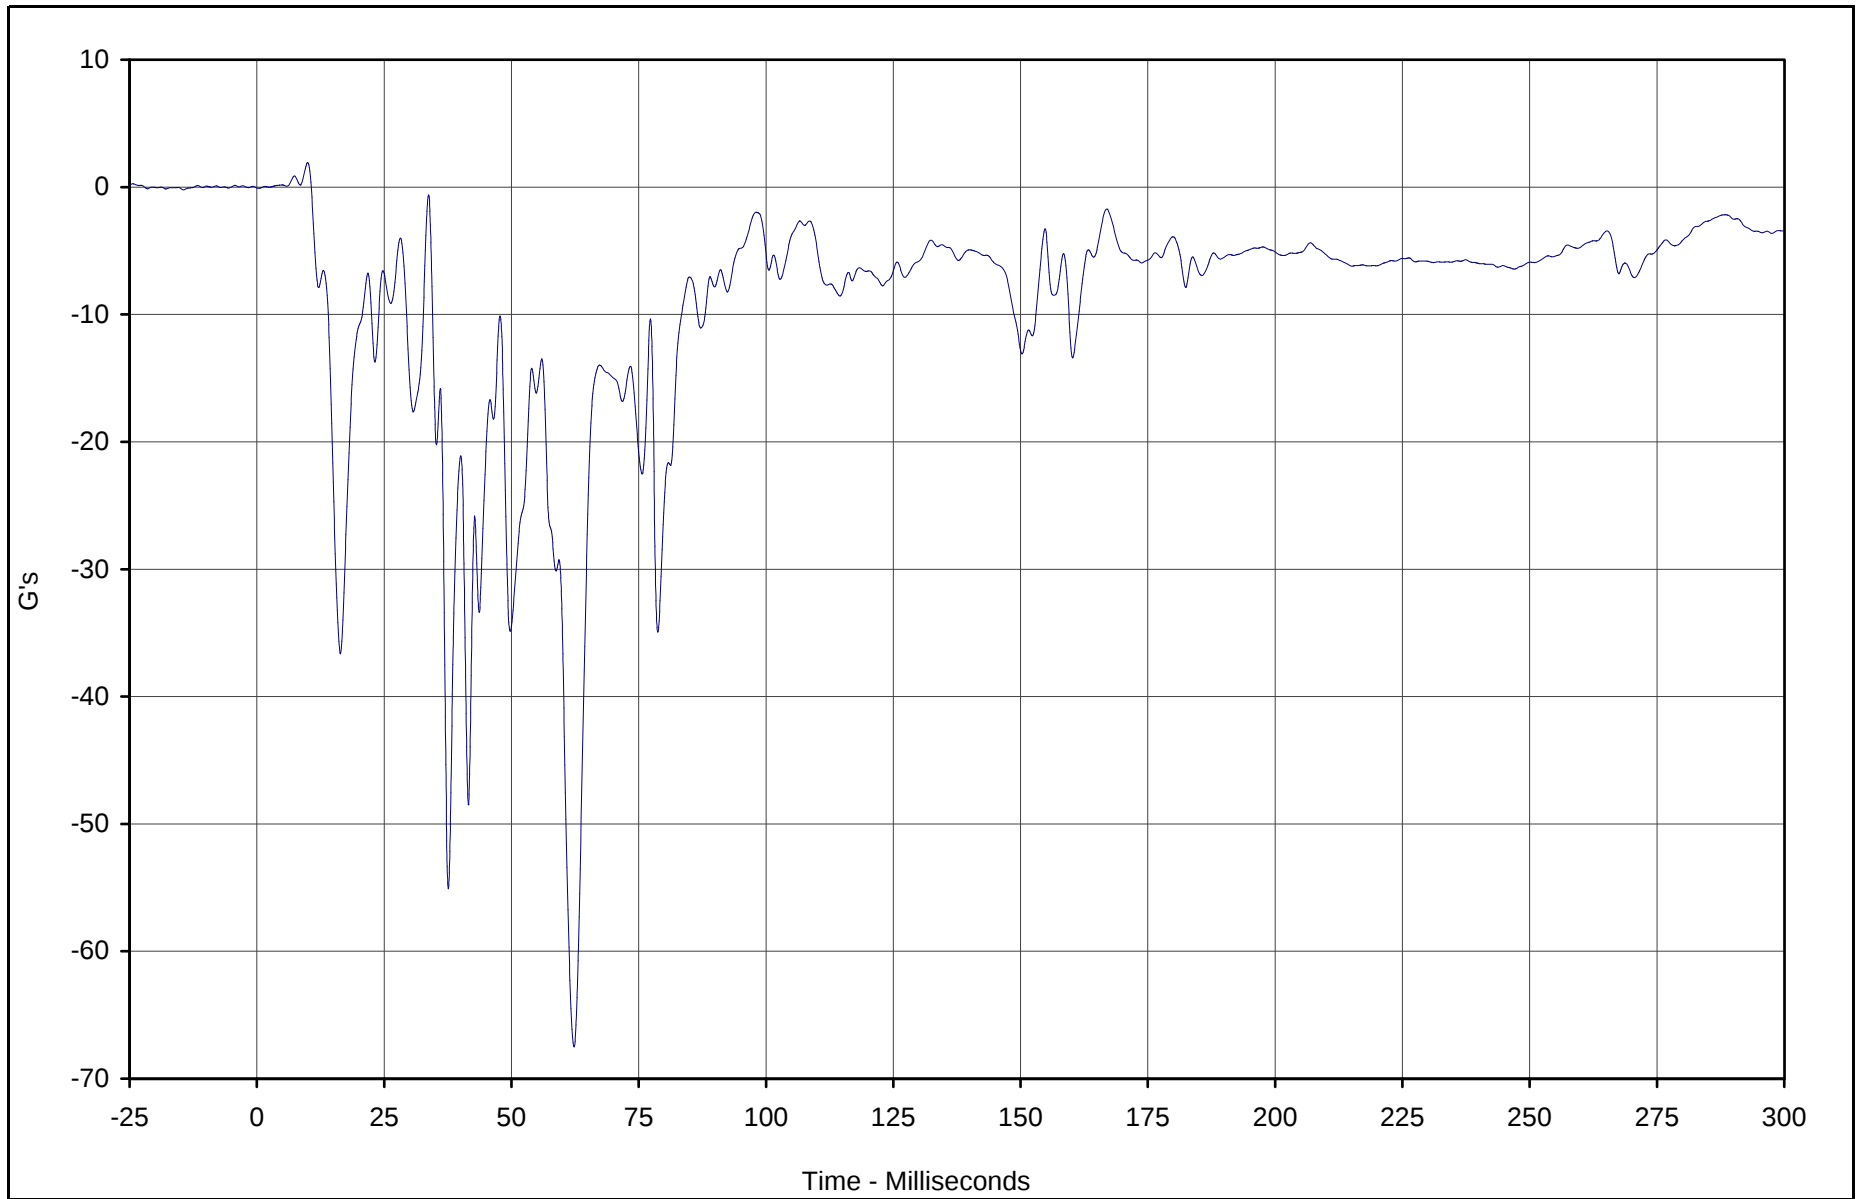

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Left Foot Fore Z	037	FIL	G's	1.9	10.0	-67.5	62.3	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

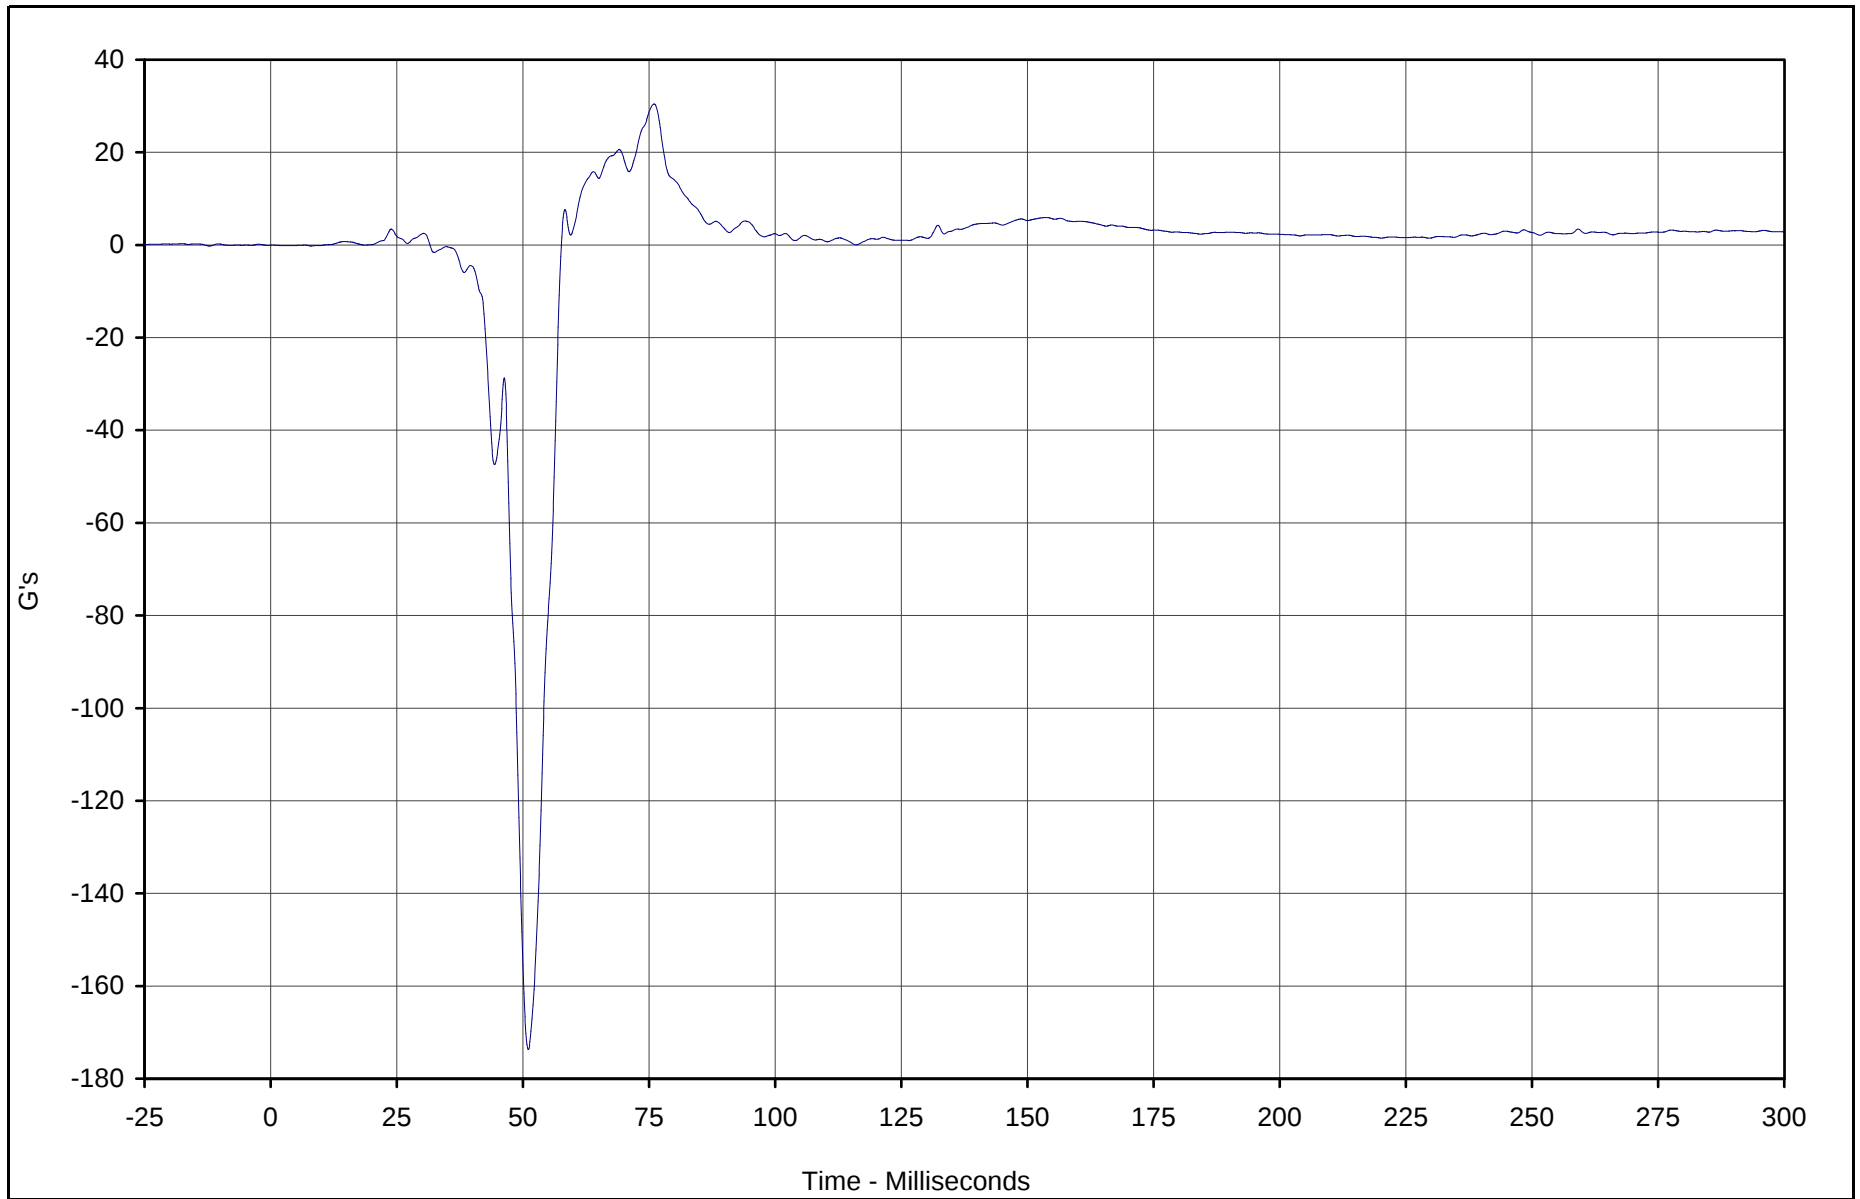

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Right Foot Aft X	038	FIL	G's	30.4	76.0	-173.7	51.1	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

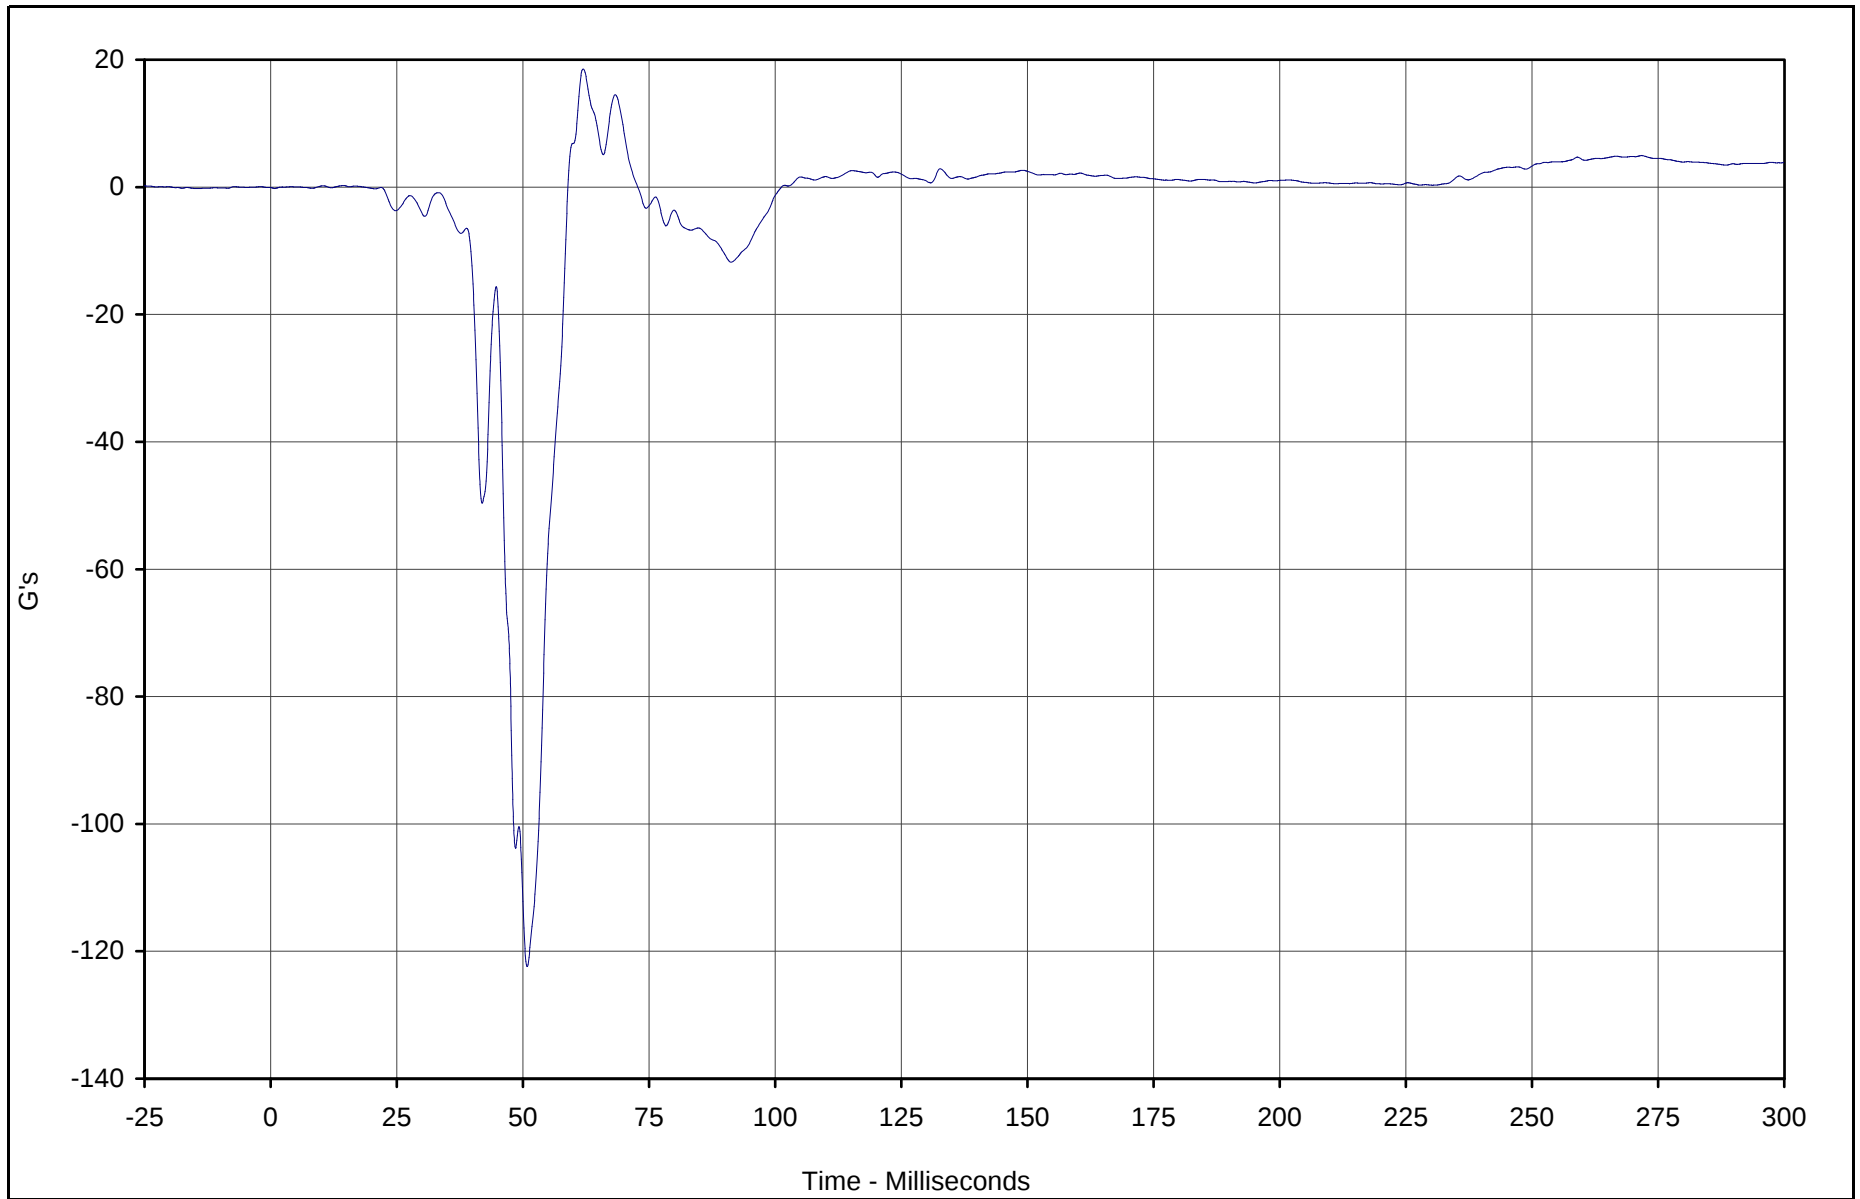

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Right Foot Aft Z	039	FIL	G's	18.6	61.9	-122.4	50.8	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

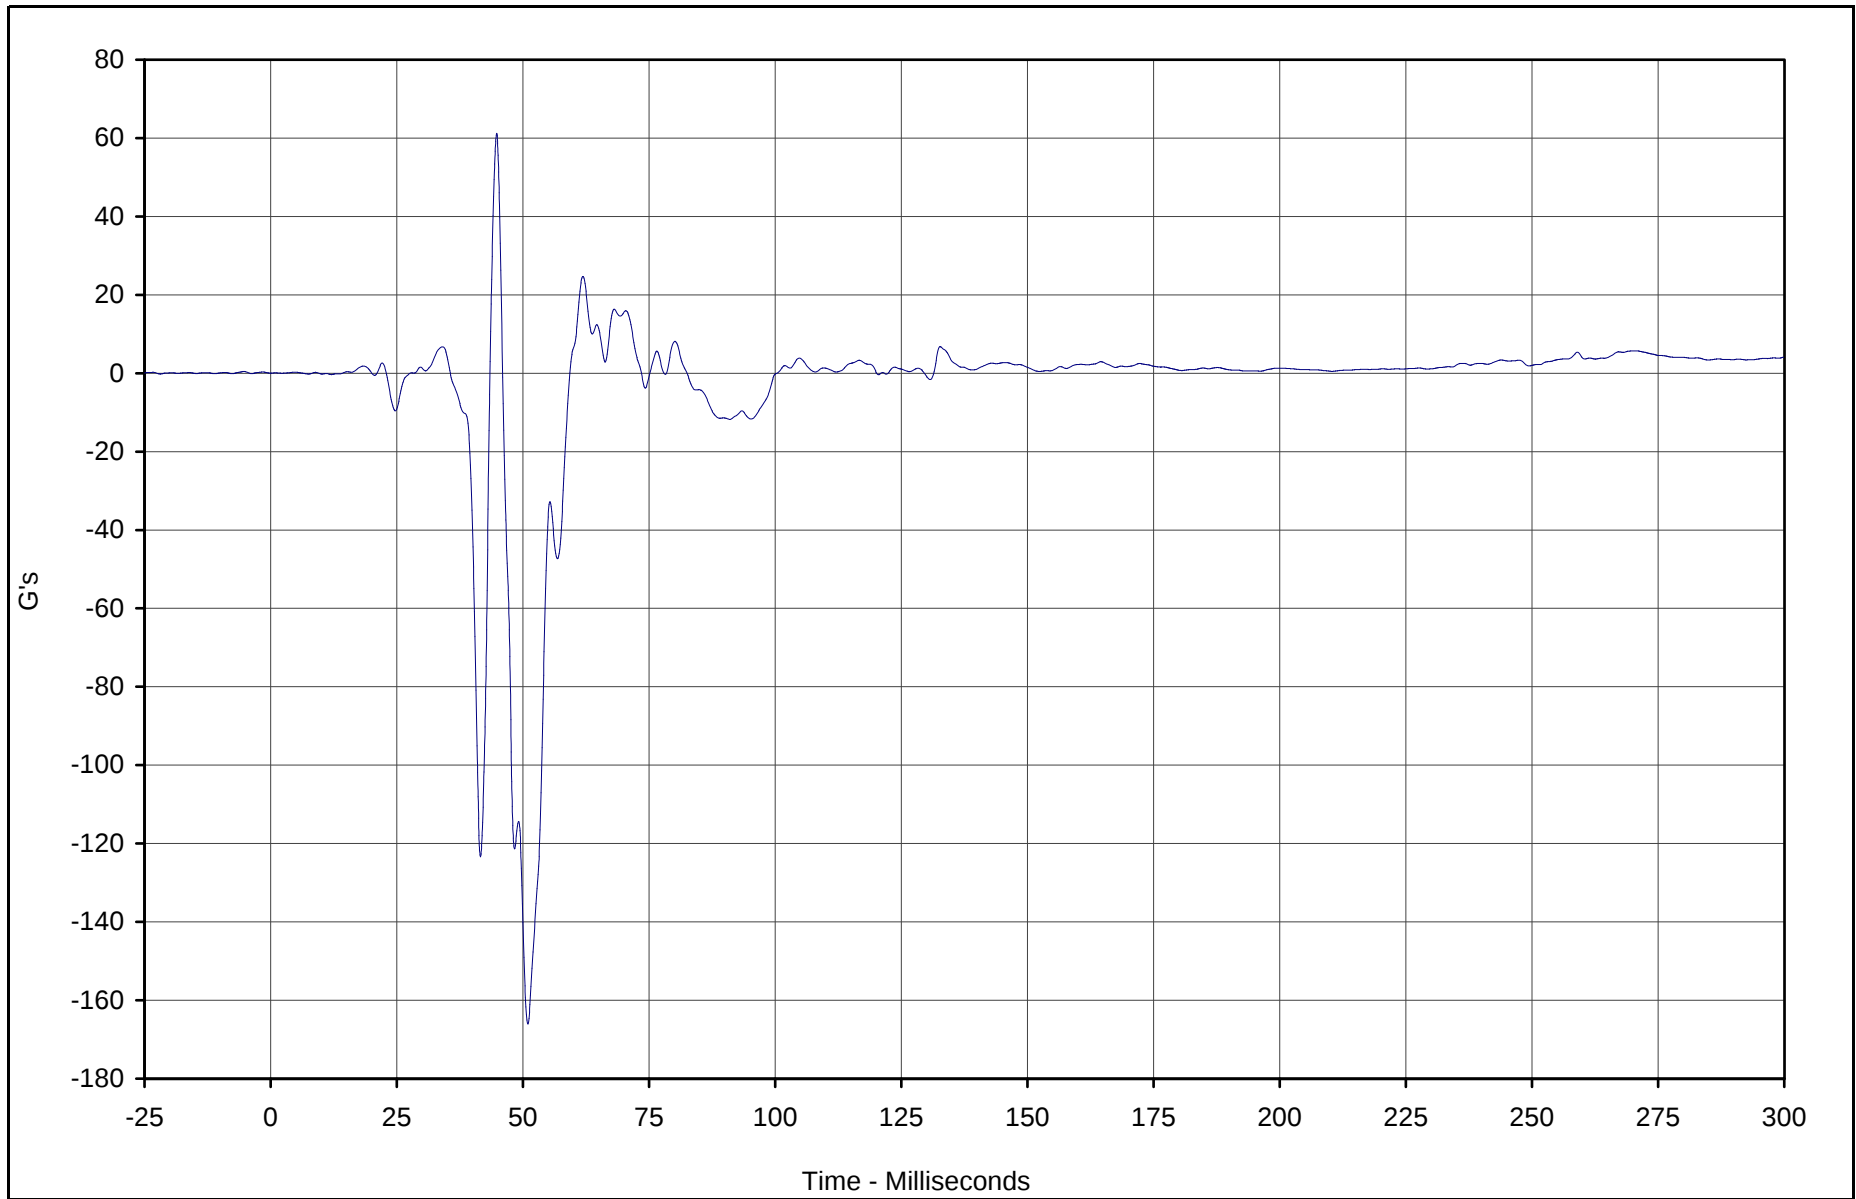

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Right Foot Fore Z	040	FIL	G's	61.2	44.8	-166.1	51.0	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

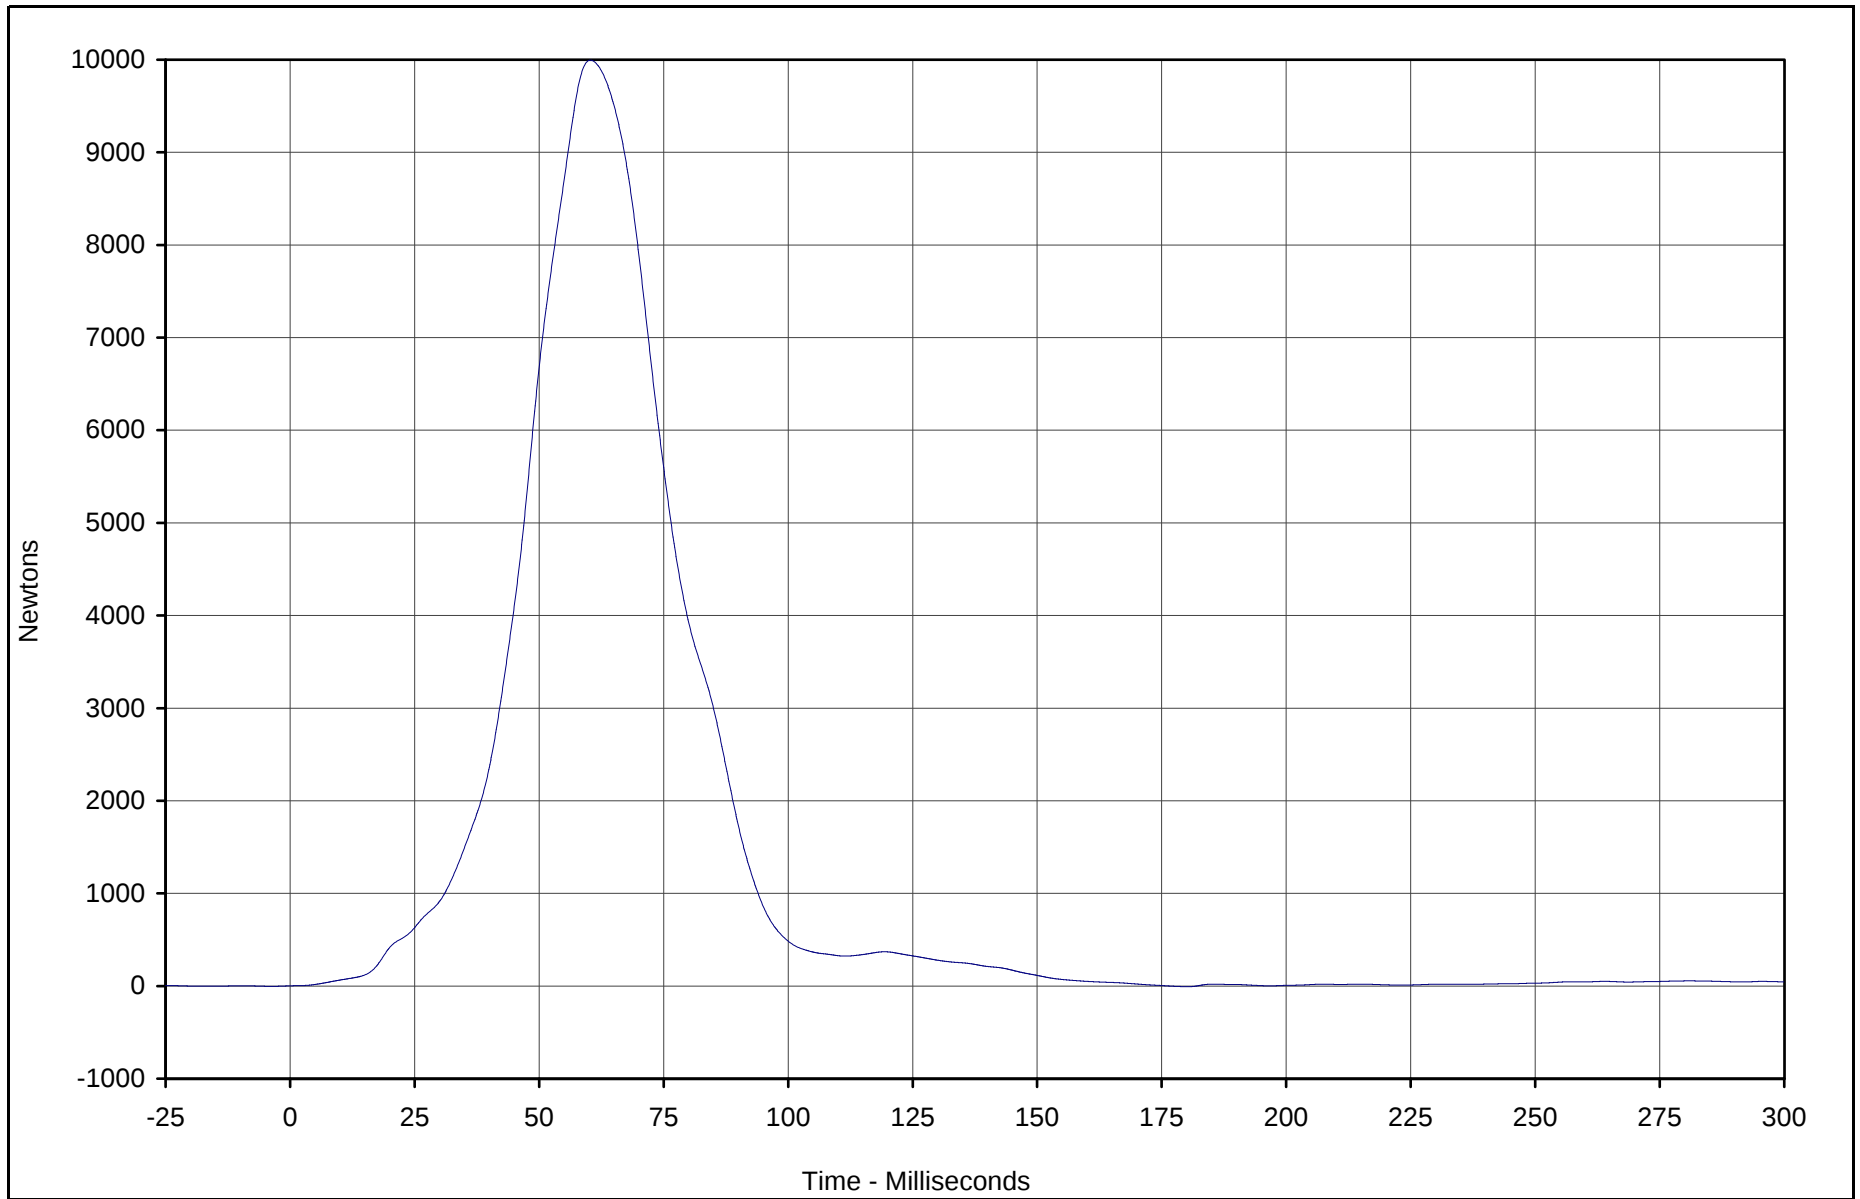

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Lap Belt Force	041	FIL	Newtons	9995.5	60.3	-7.3	180.2	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

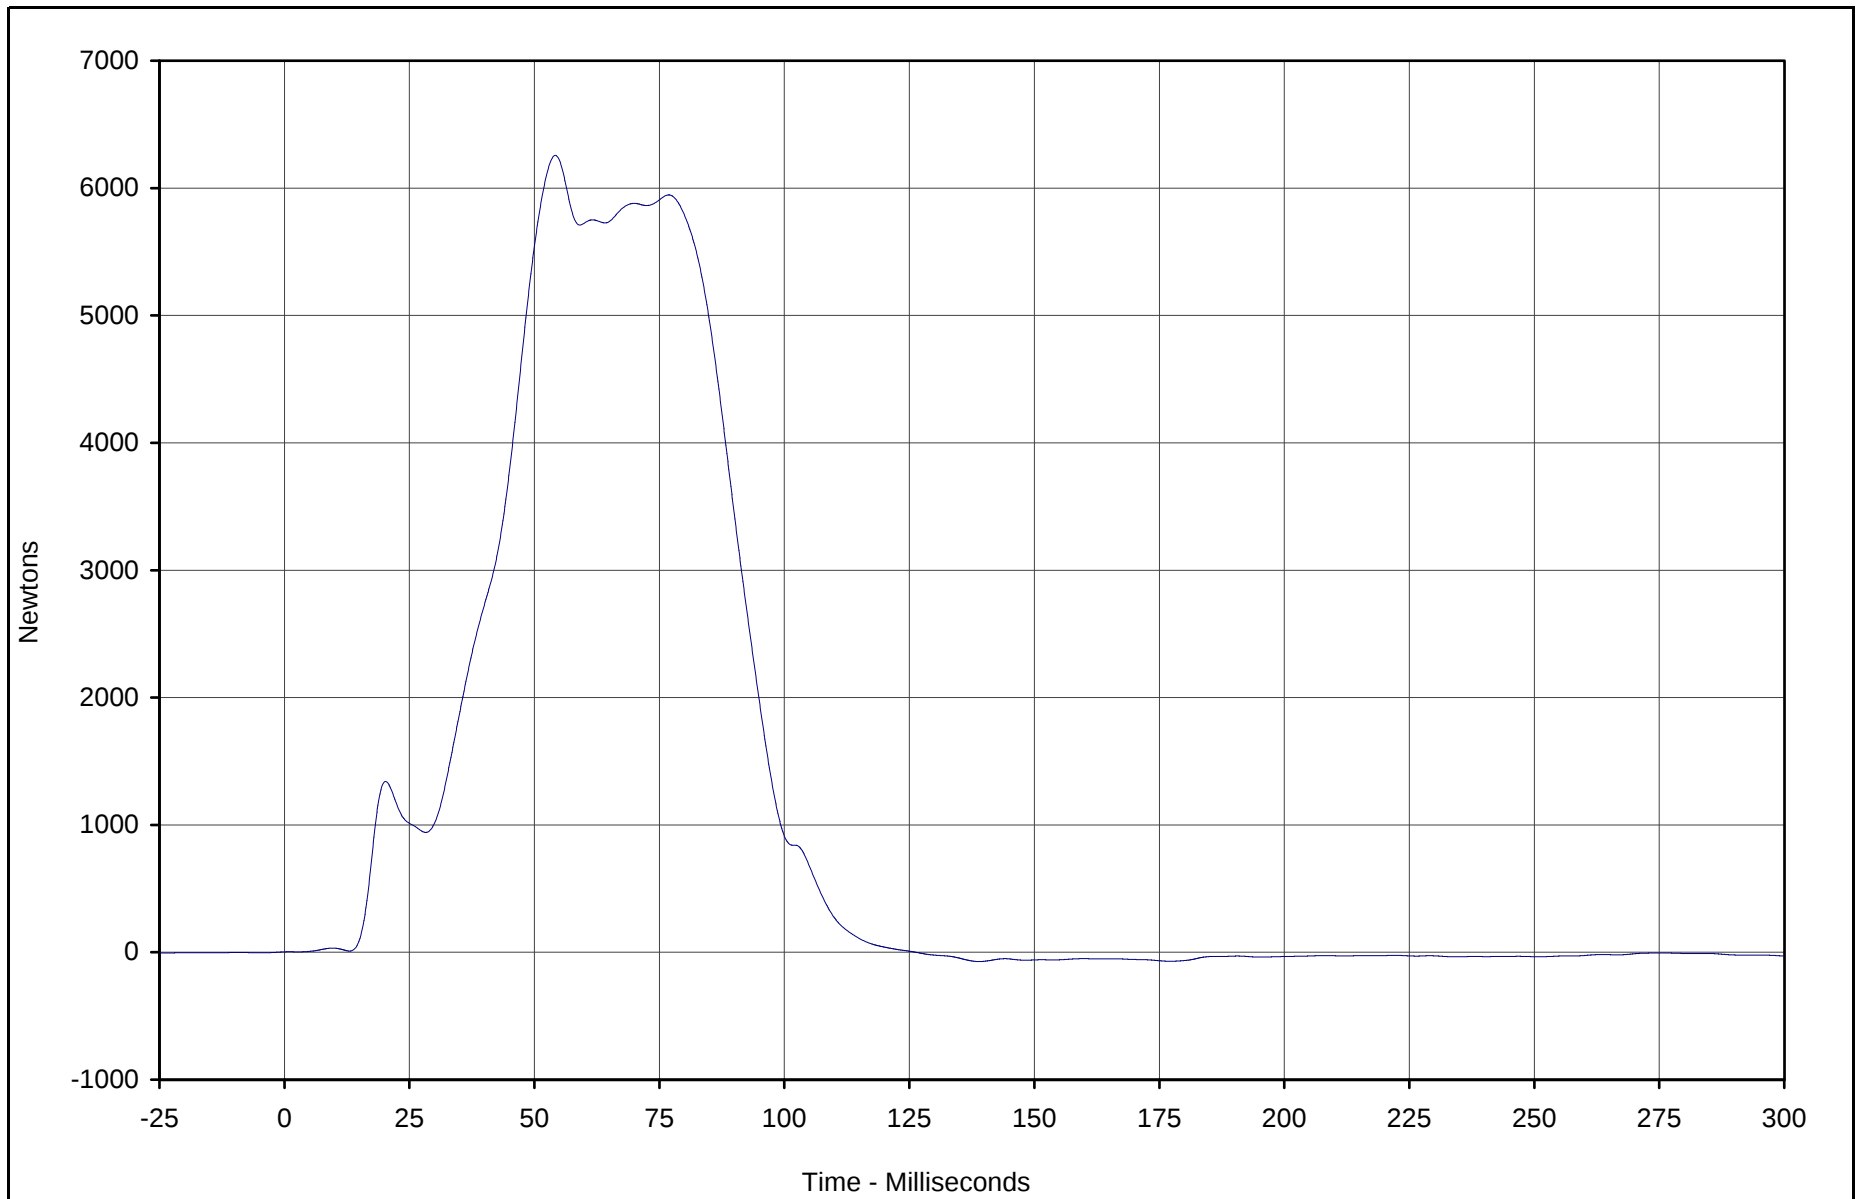

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Shoulder Belt Force	042	FIL	Newtons	6256.8	54.2	-72.9	138.9	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

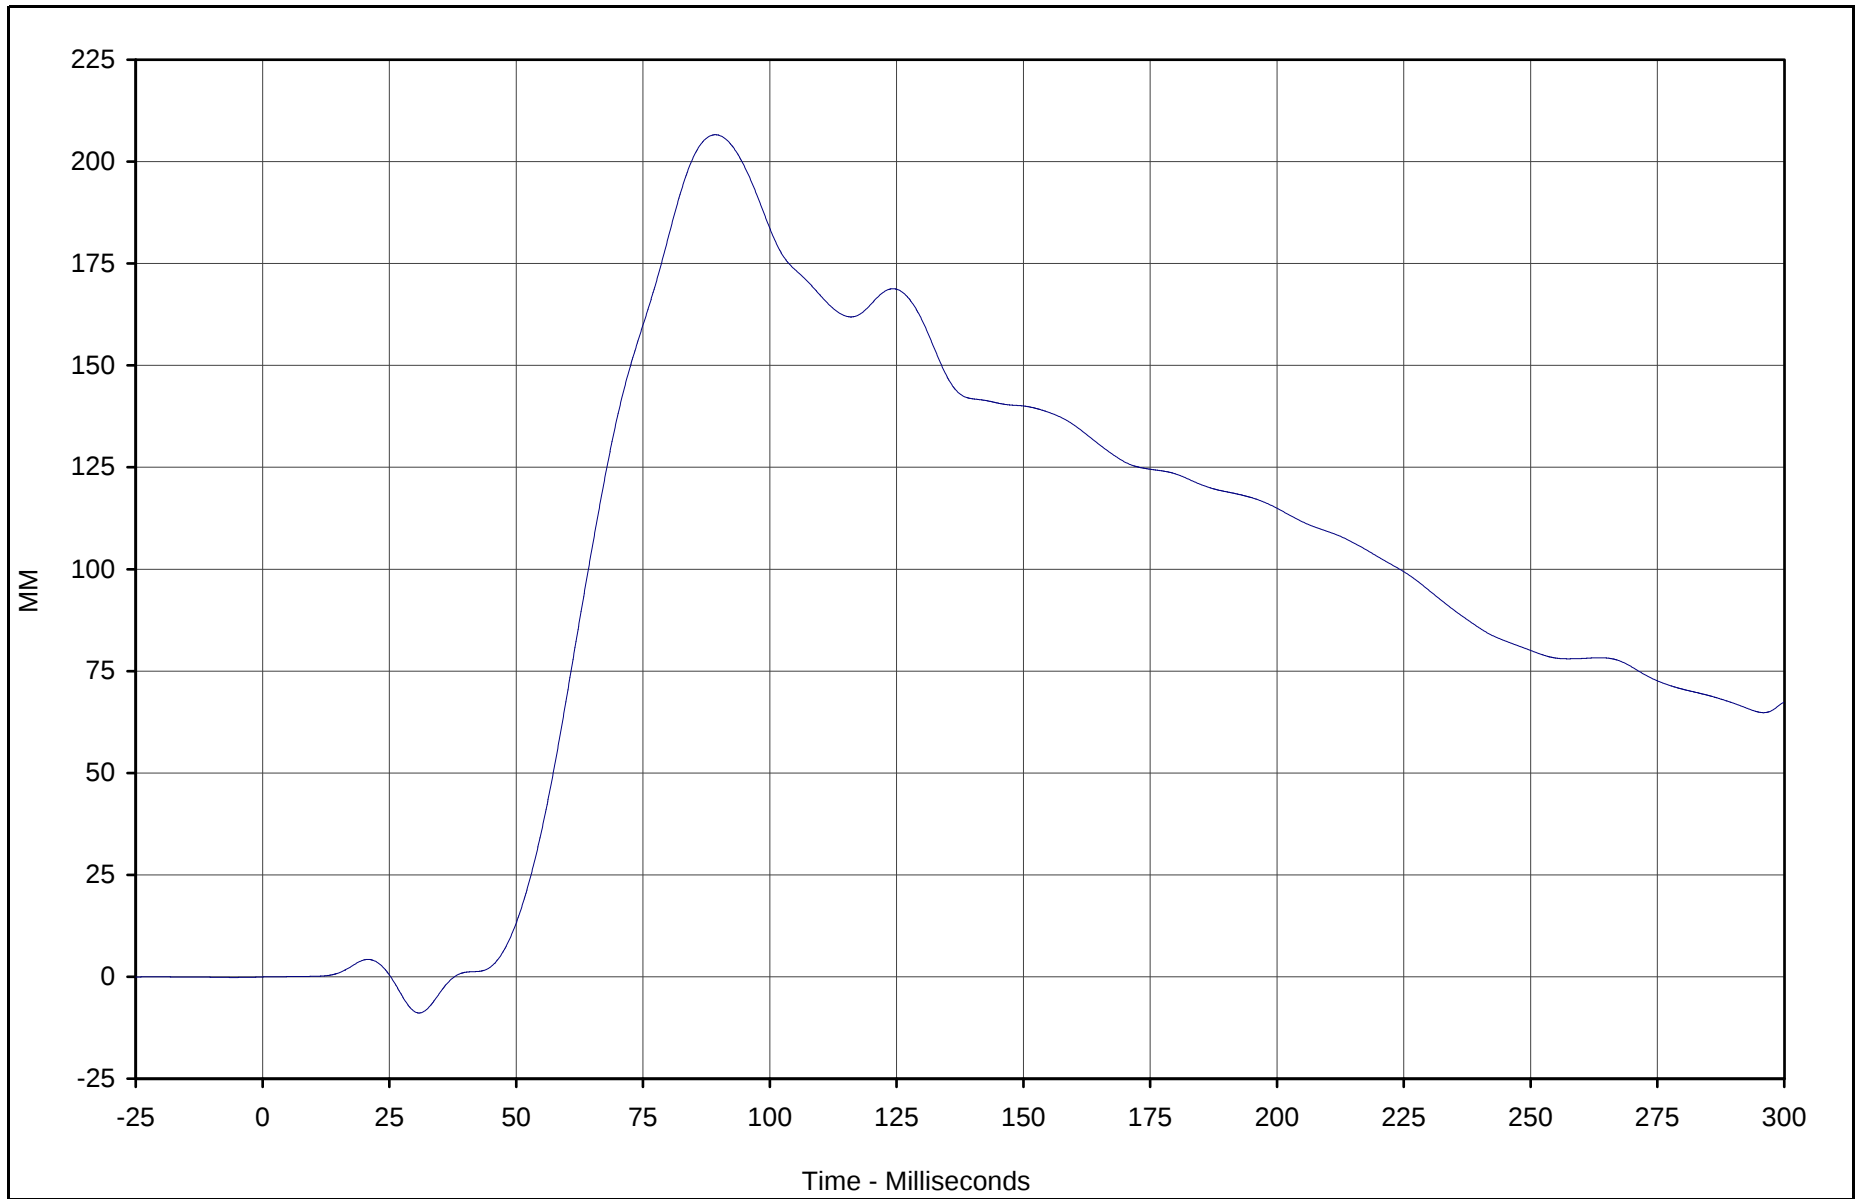

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Shoulder Belt Pullout	043	FIL	MM	206.6	89.3	-8.9	30.9	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

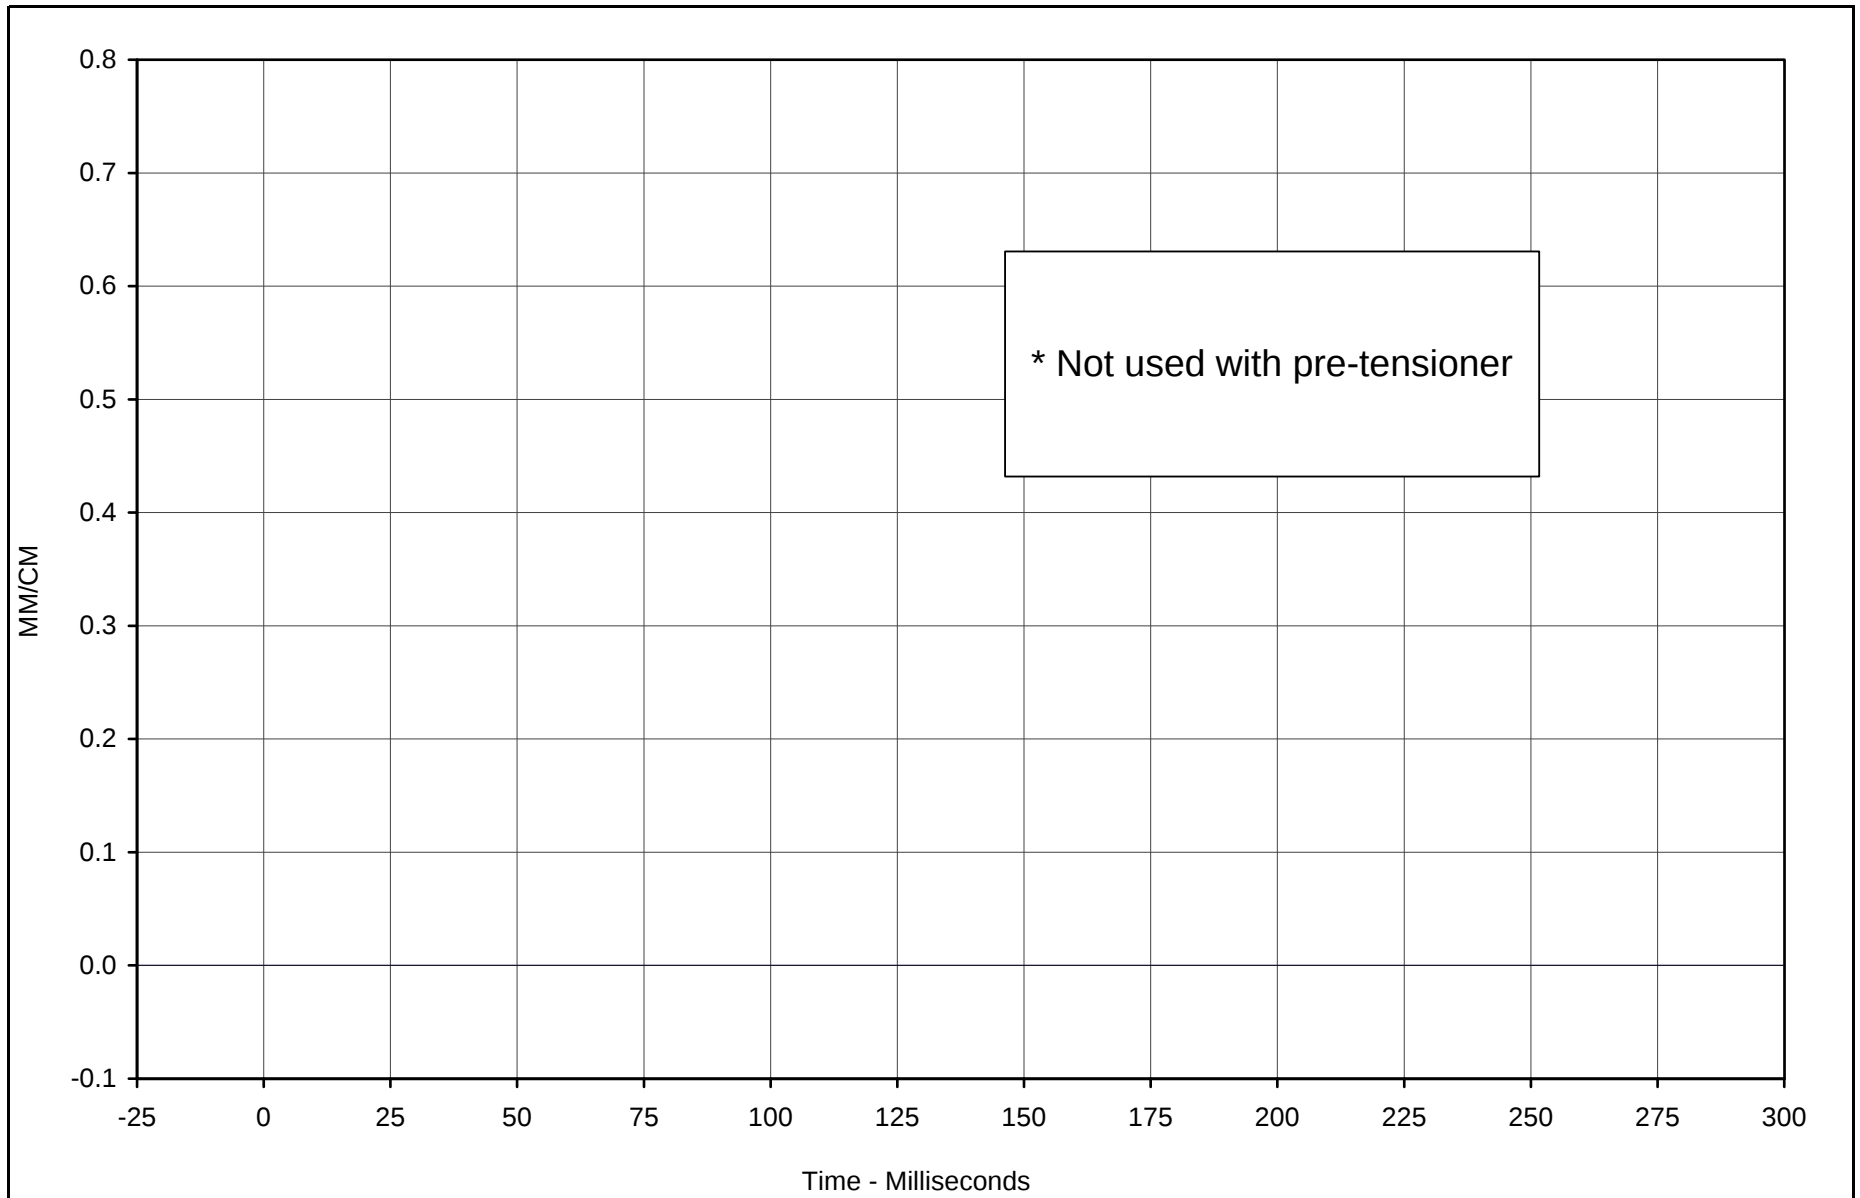

* Not used with pre-tensioner

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Driver Shoulder Belt Elongation	044	FIL	MM/CM	0.00	0.0	0.00	0.0	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

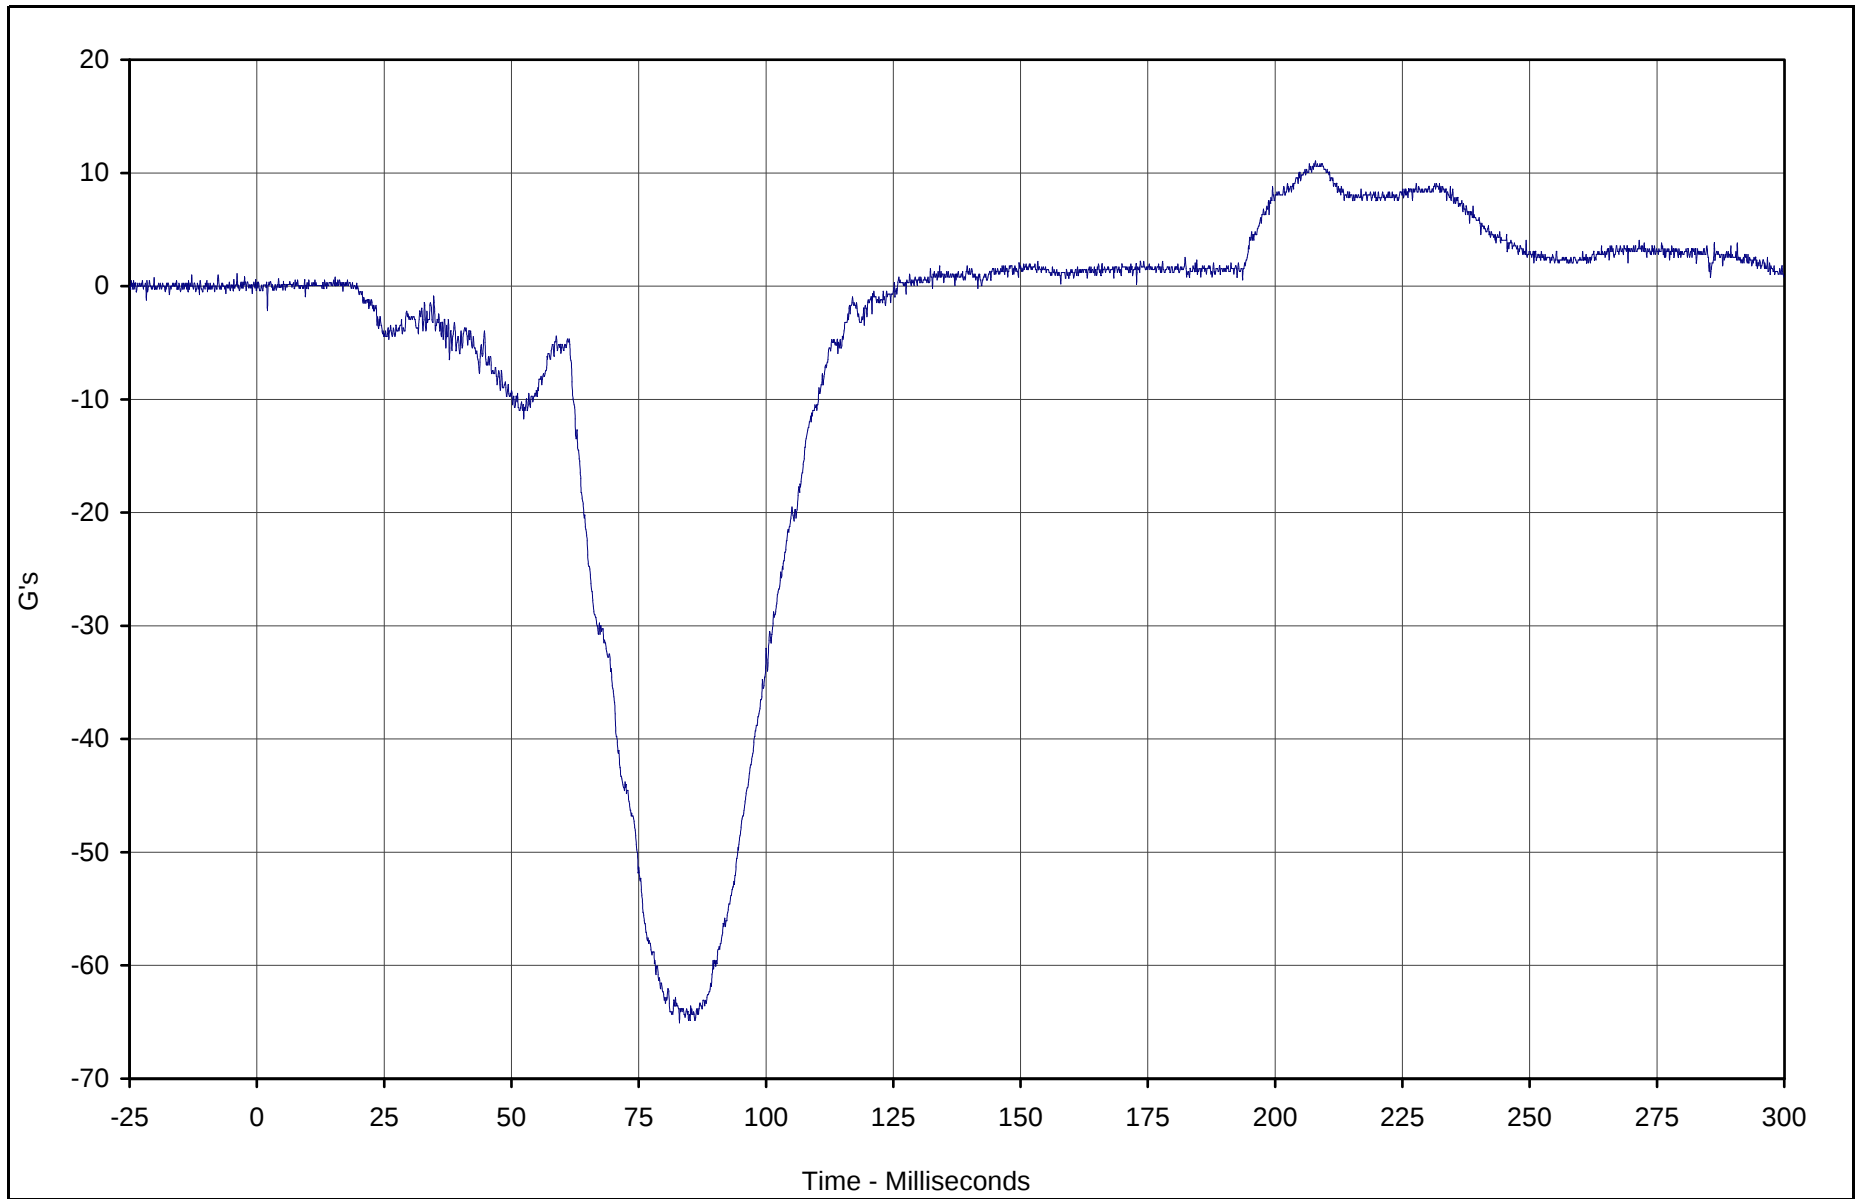

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Head Primary X	045	FIL	G's	11.1	207.9	-65.1	83.0	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

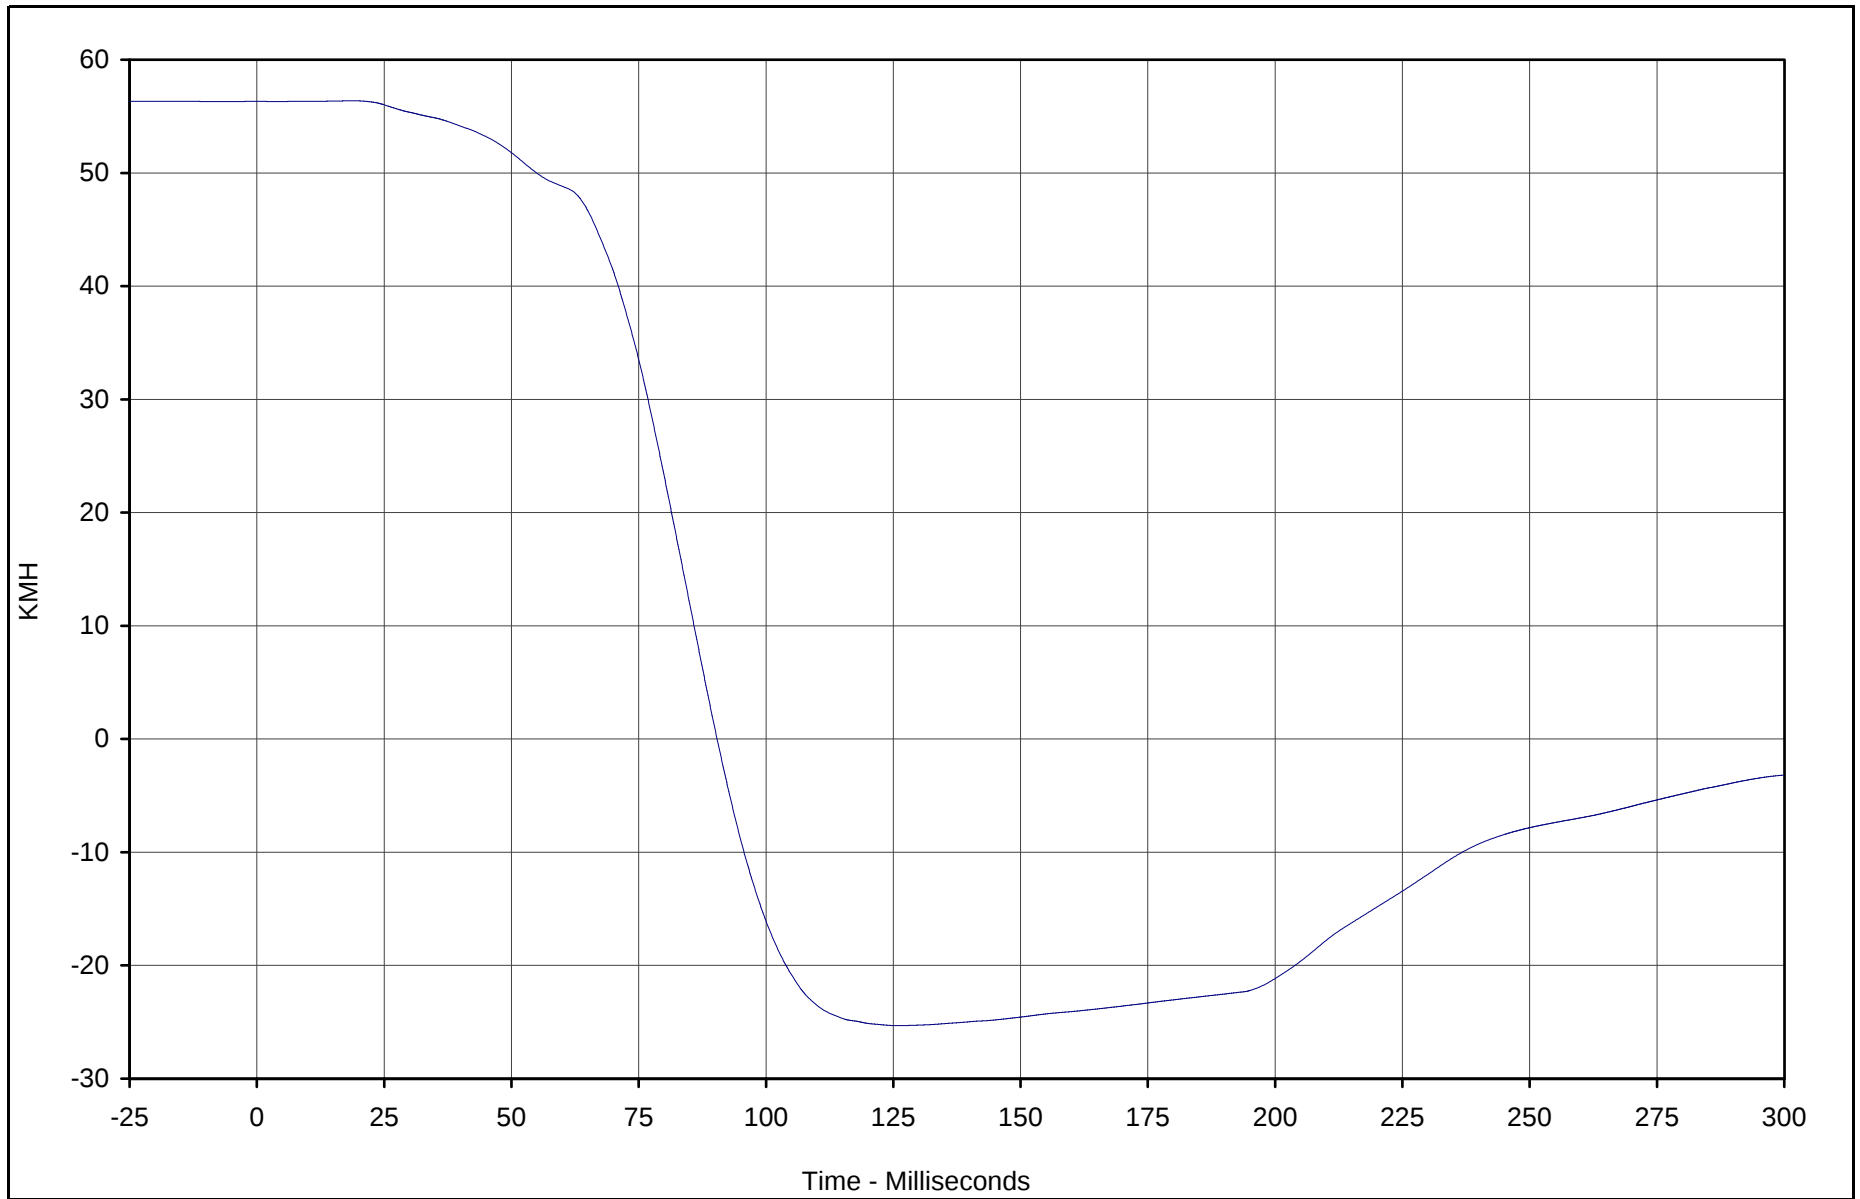

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Head Primary X Velocity	045	IN1	KMH	56.4	19.0	-25.3	125.8	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

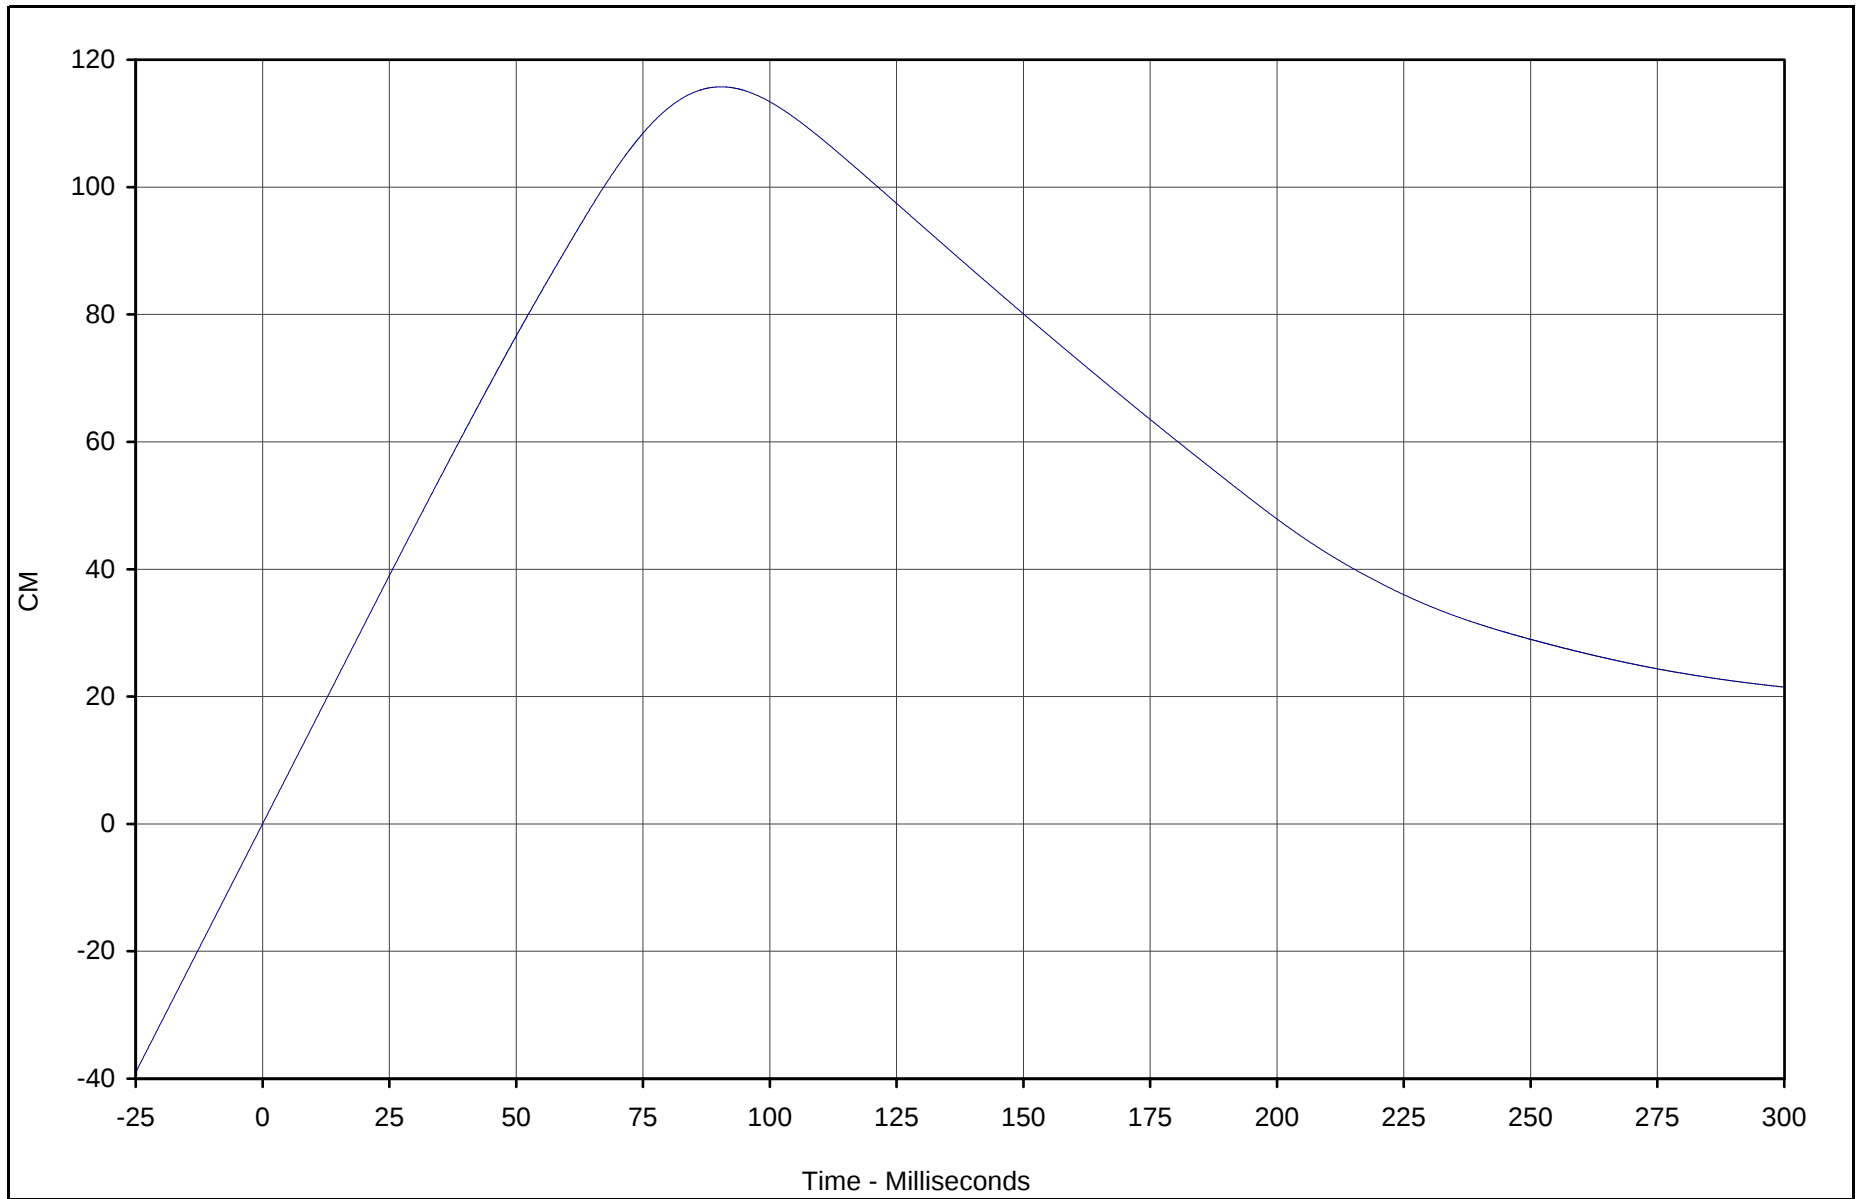

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Head Primary X Displ.	045	IN2	CM	115.7	90.4	0.0	0.0	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

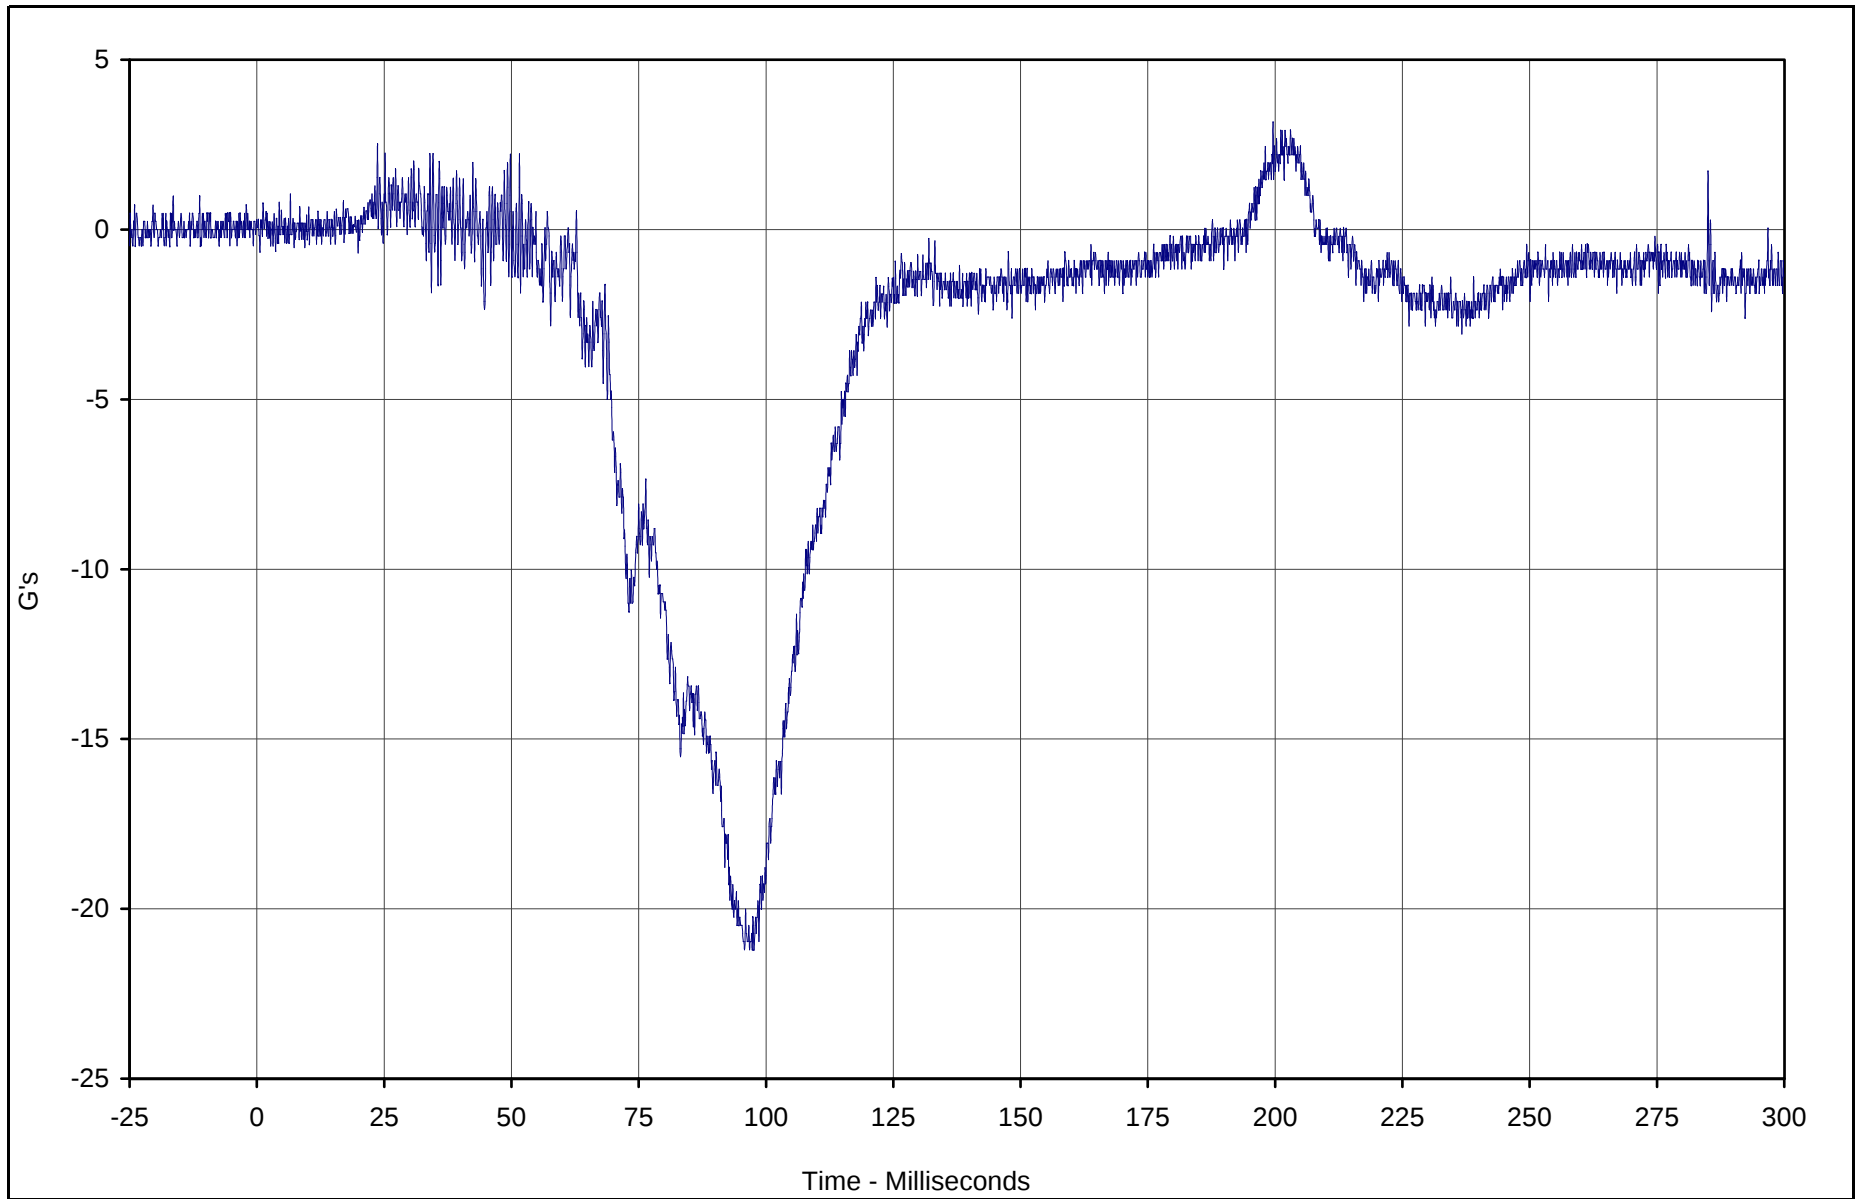

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Head Primary Y	046	FIL	G's	3.2	199.6	-21.2	95.8	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

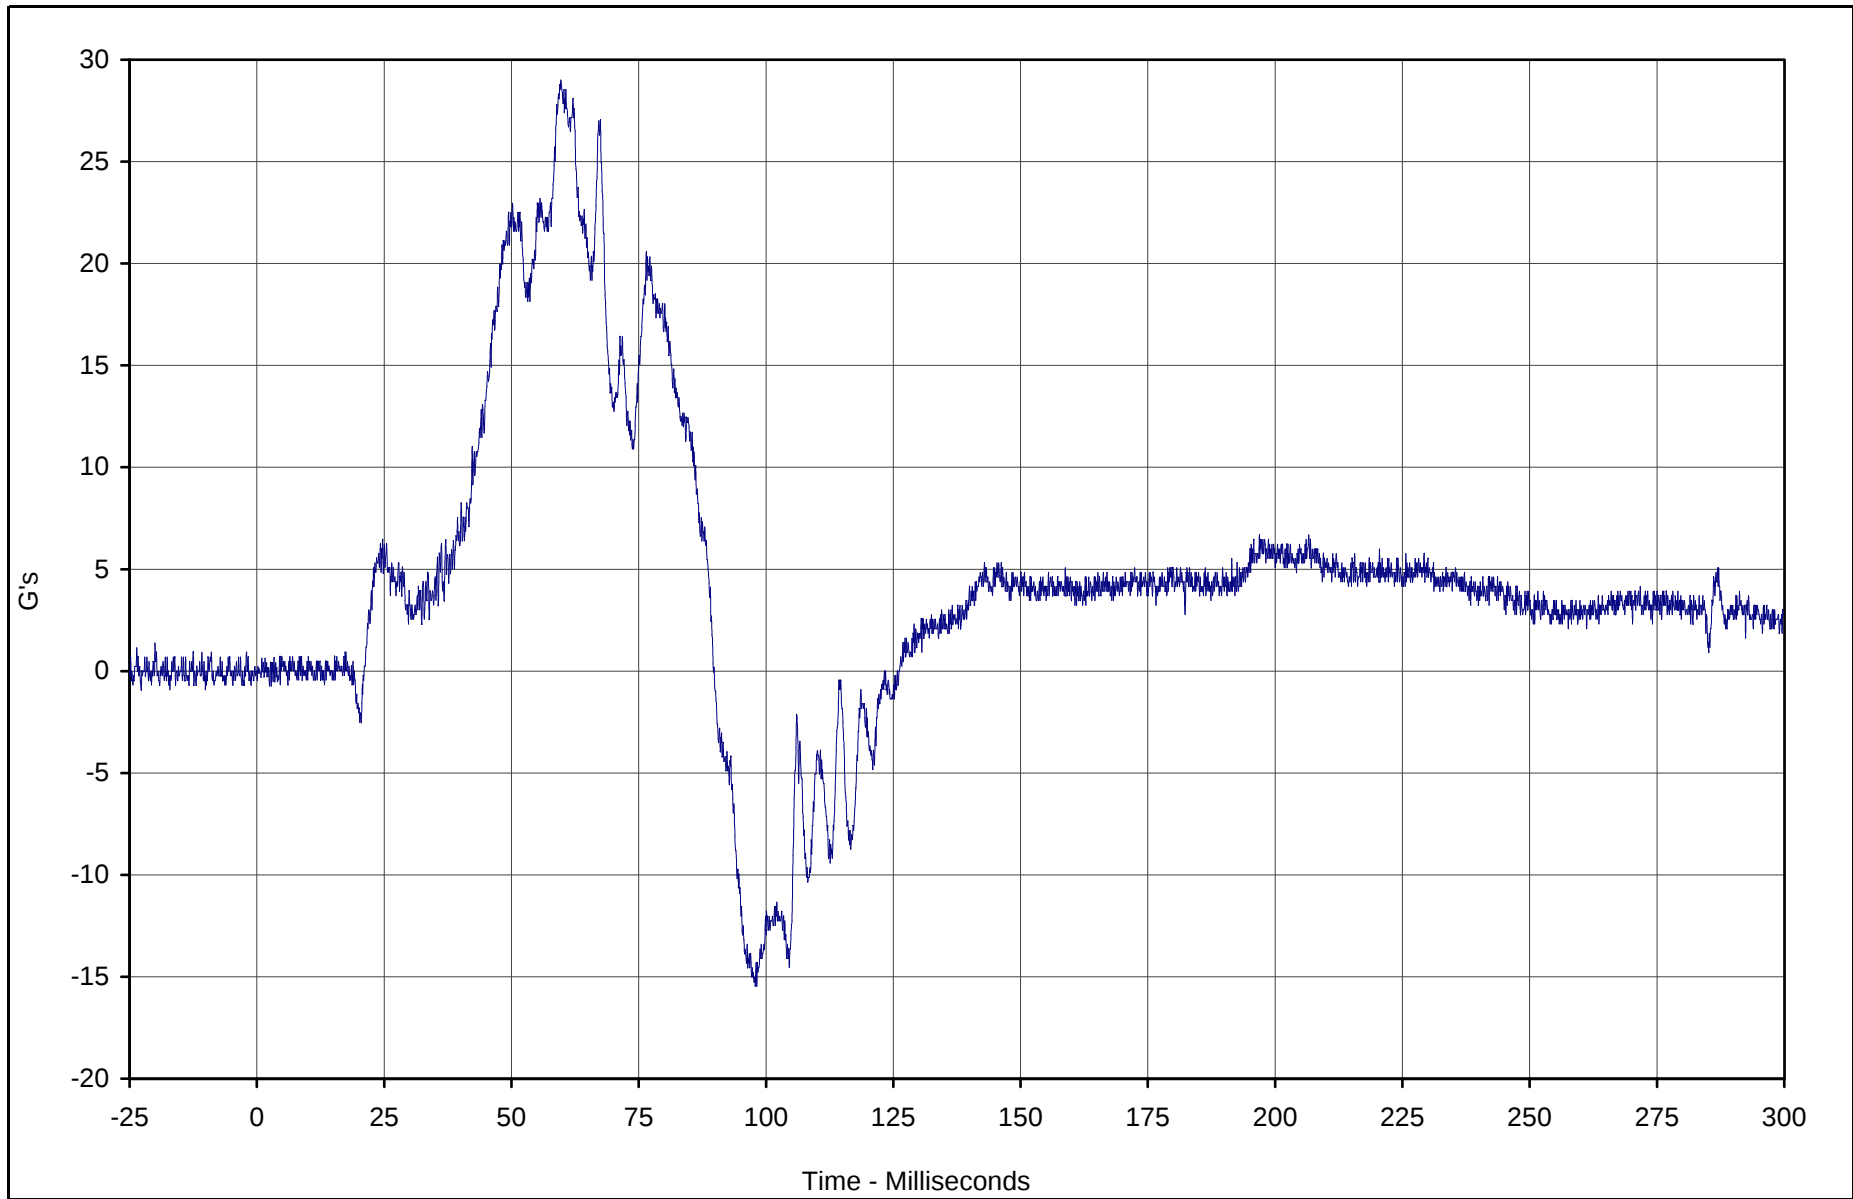

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Head Primary Z	047	FIL	G's	29.0	59.7	-15.5	97.9	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

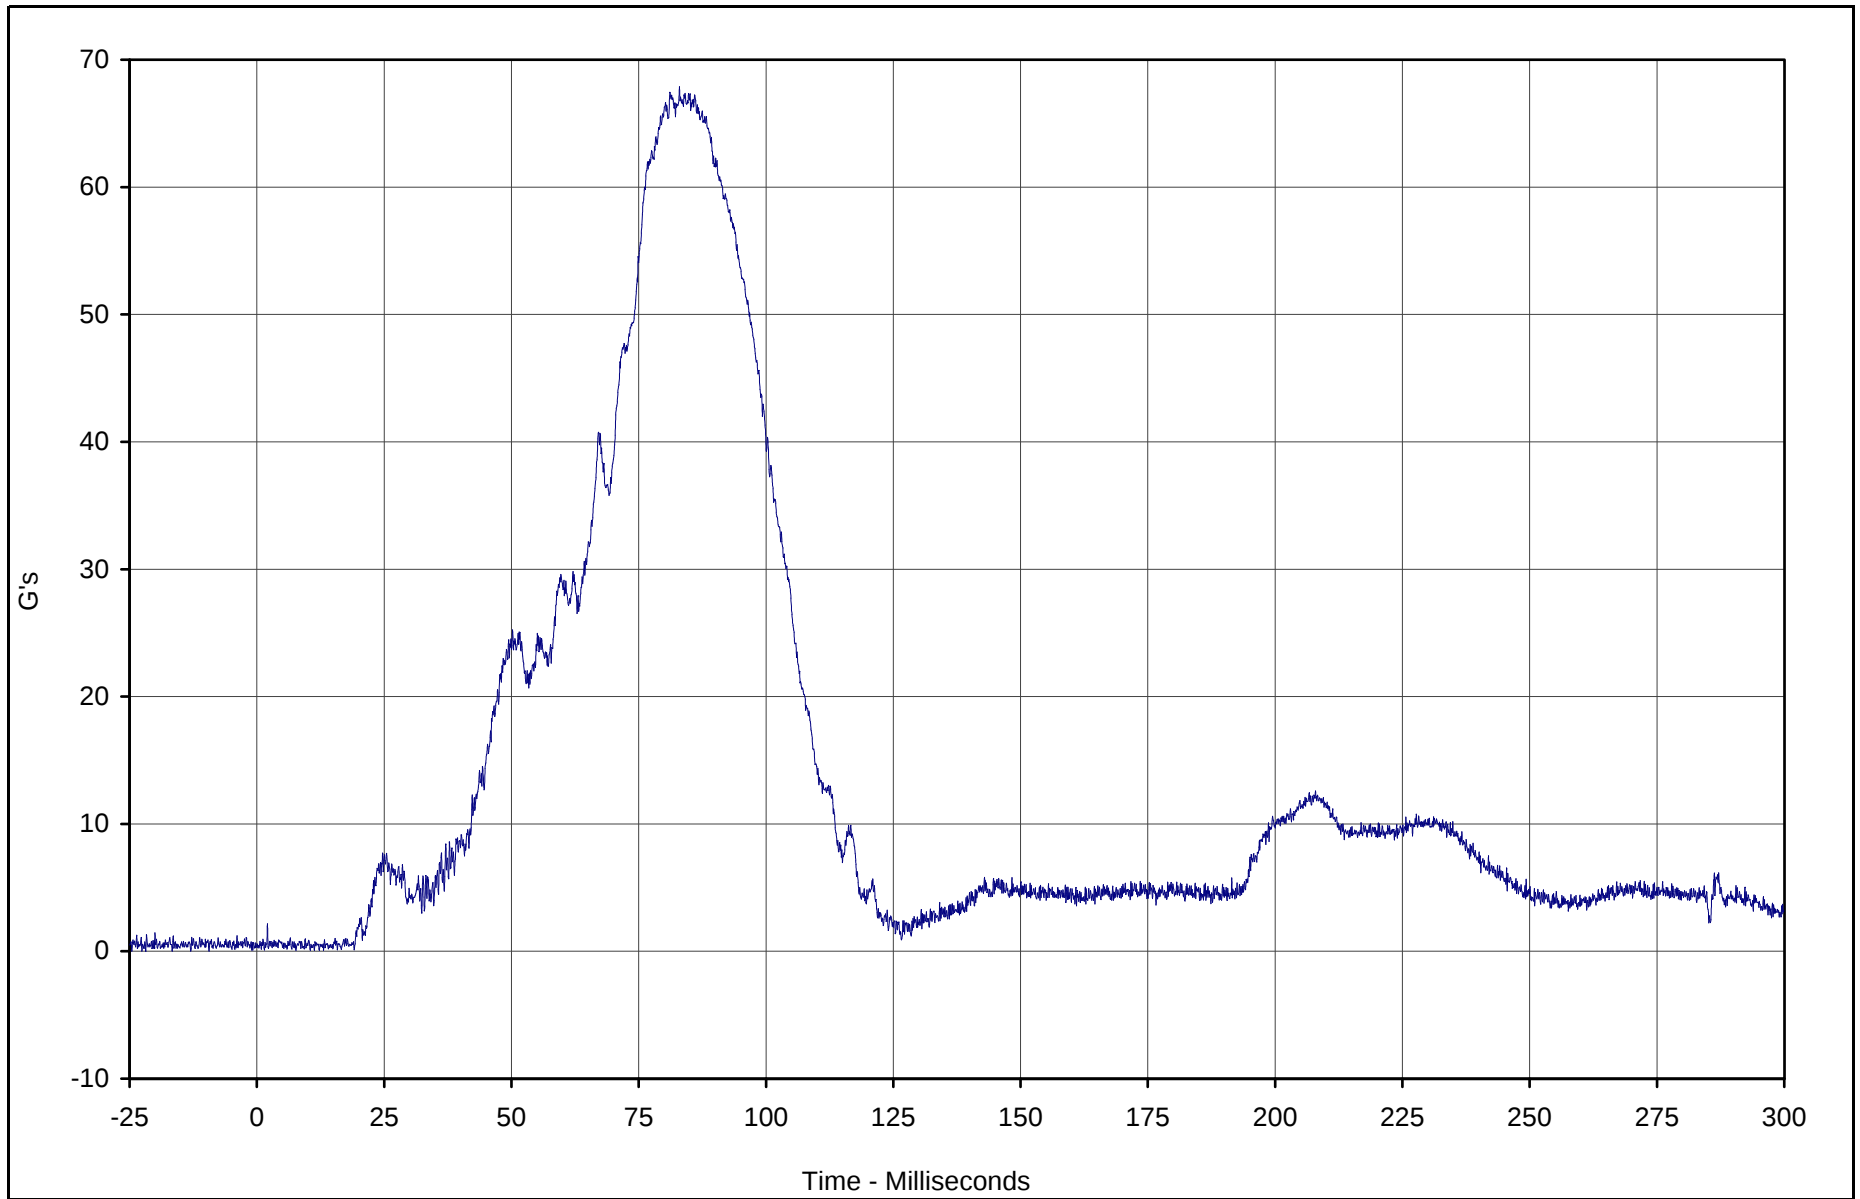

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Head Resultant Primary	045	RES	G's	67.9	83.0	0.1	10.5	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

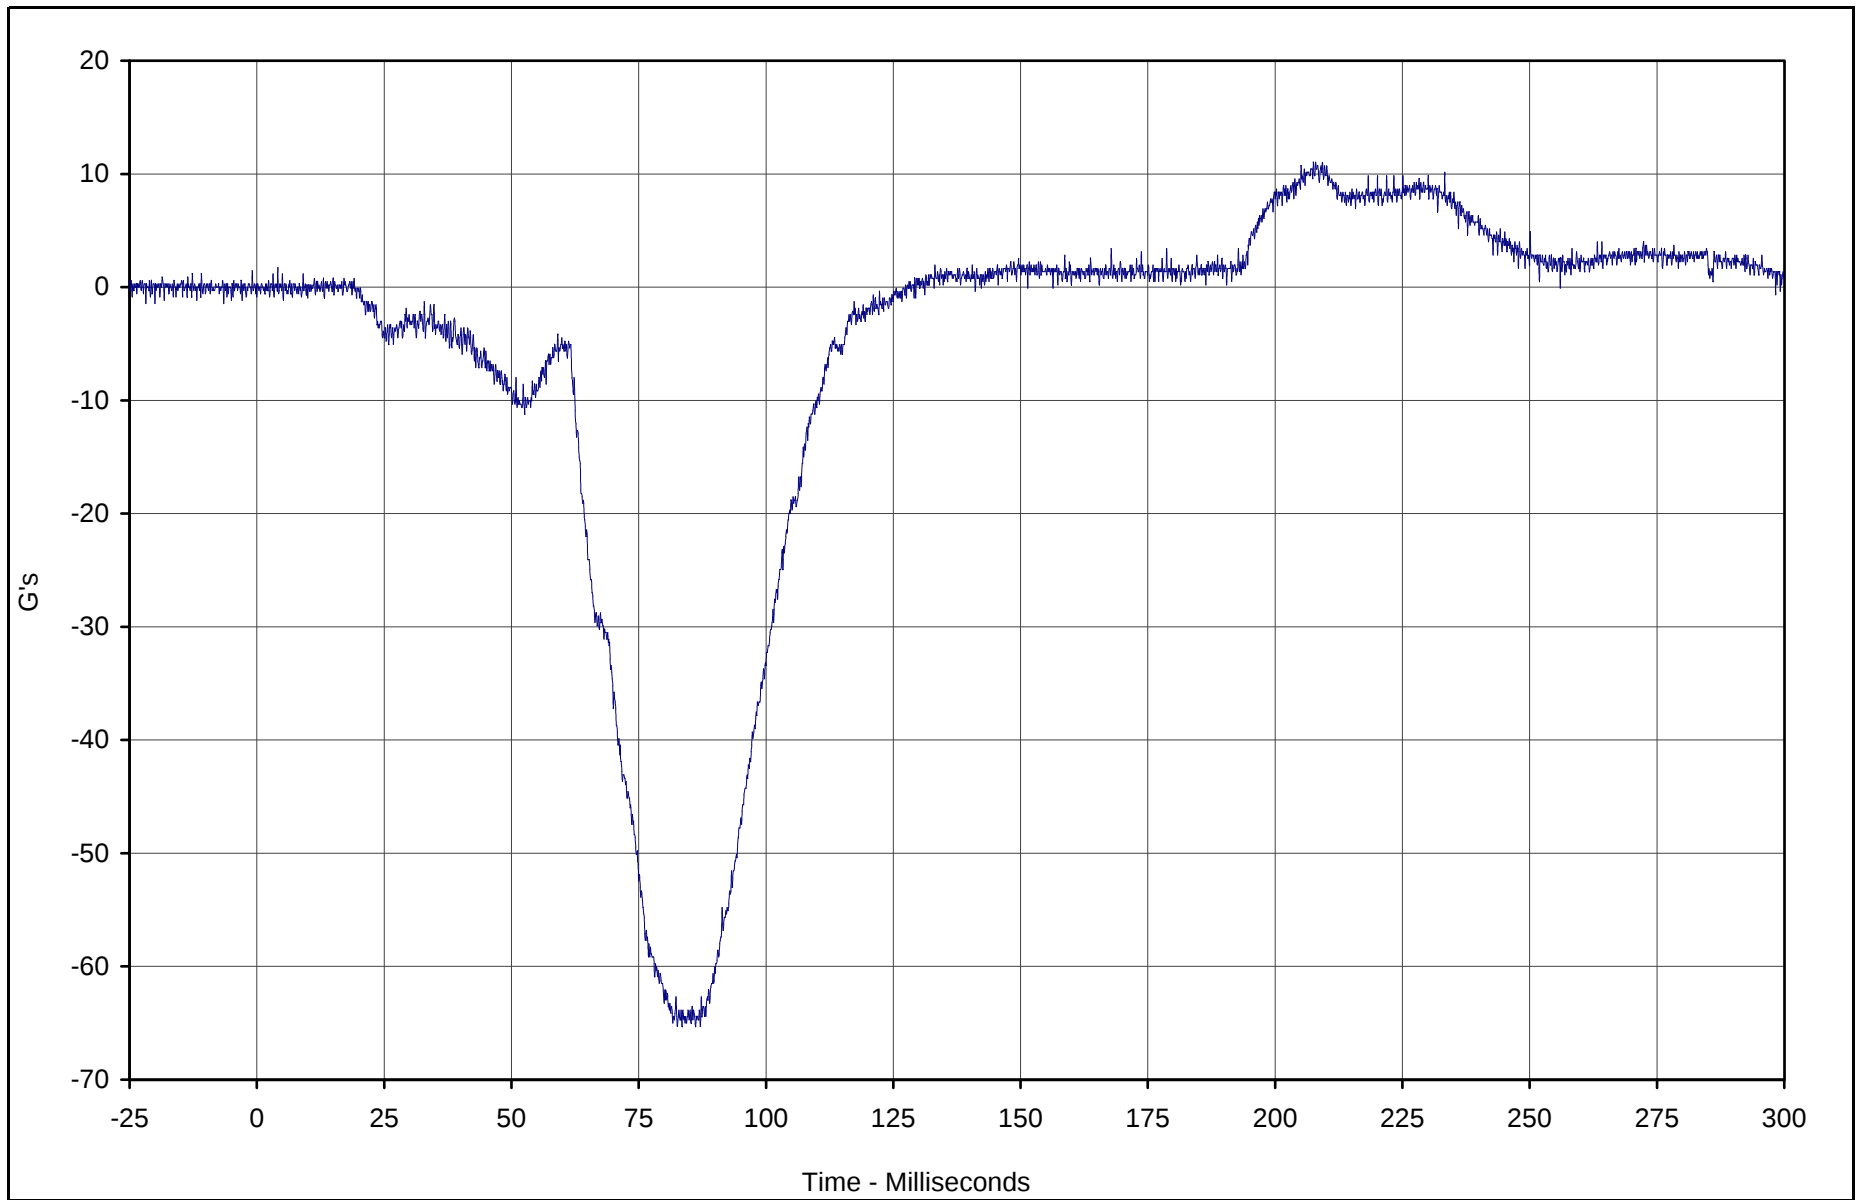

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Head Redundant X	048	FIL	G's	11.0	207.5	-65.3	82.6	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

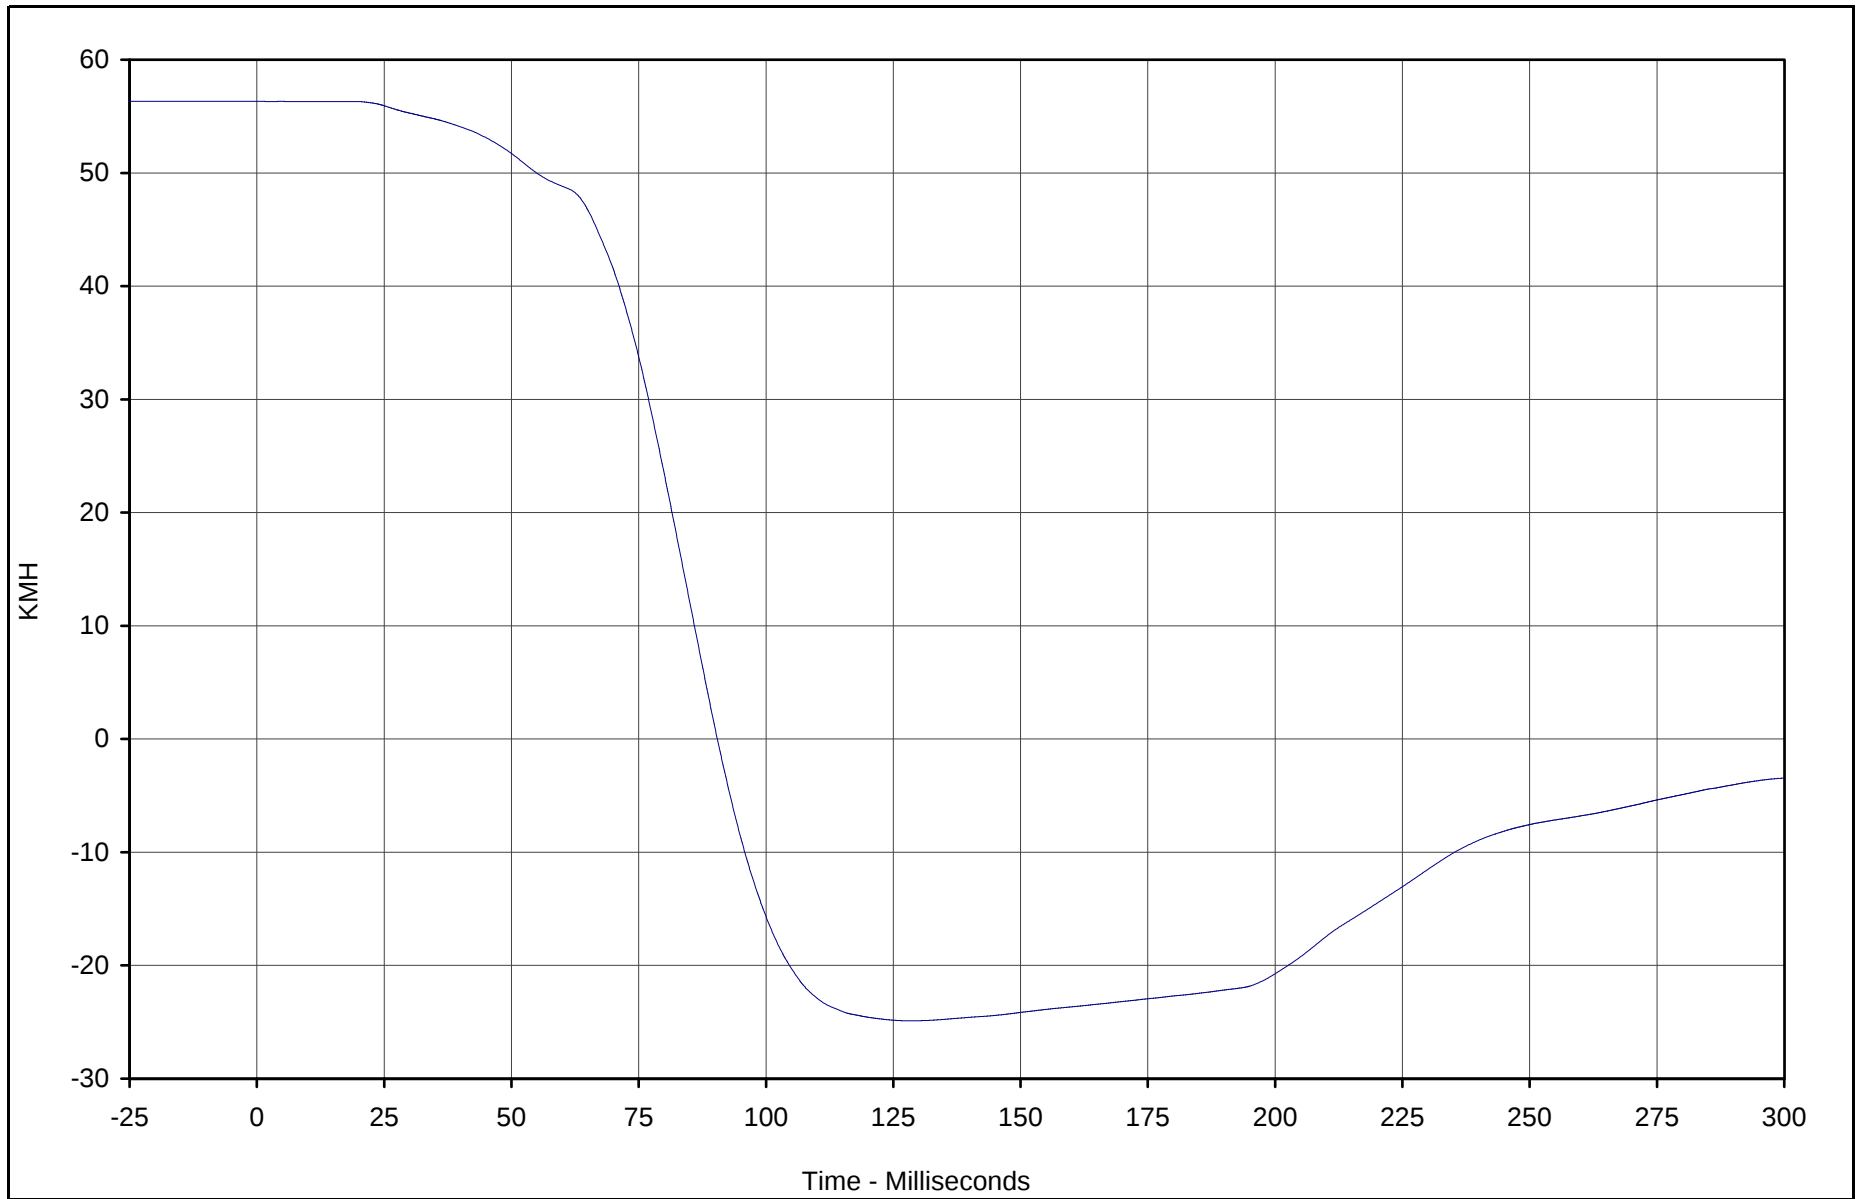

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Head Redundant X Velocity	048	IN1	KMH	56.3	0.0	-24.9	128.3	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

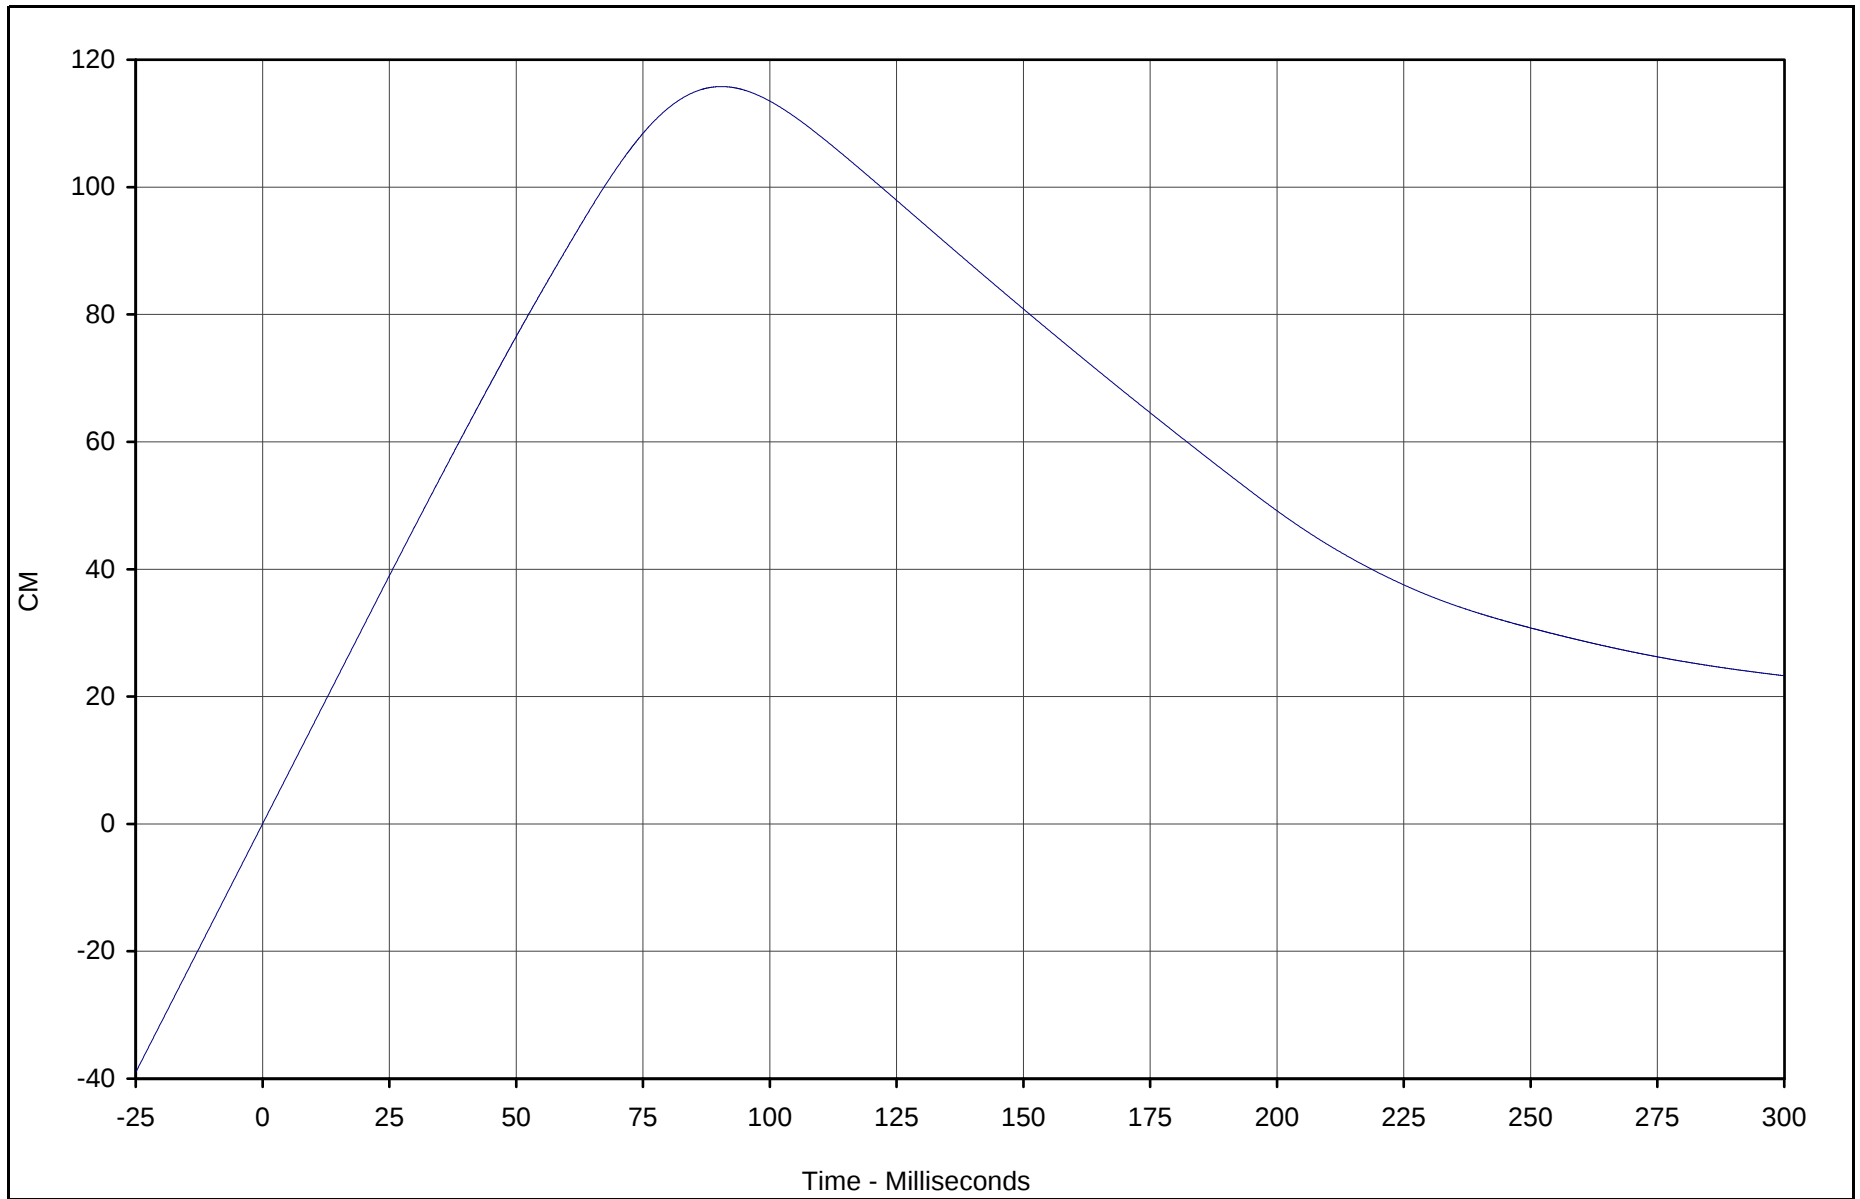

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Head Redundant X Displ.	048	IN2	CM	115.8	90.4	0.0	0.0	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

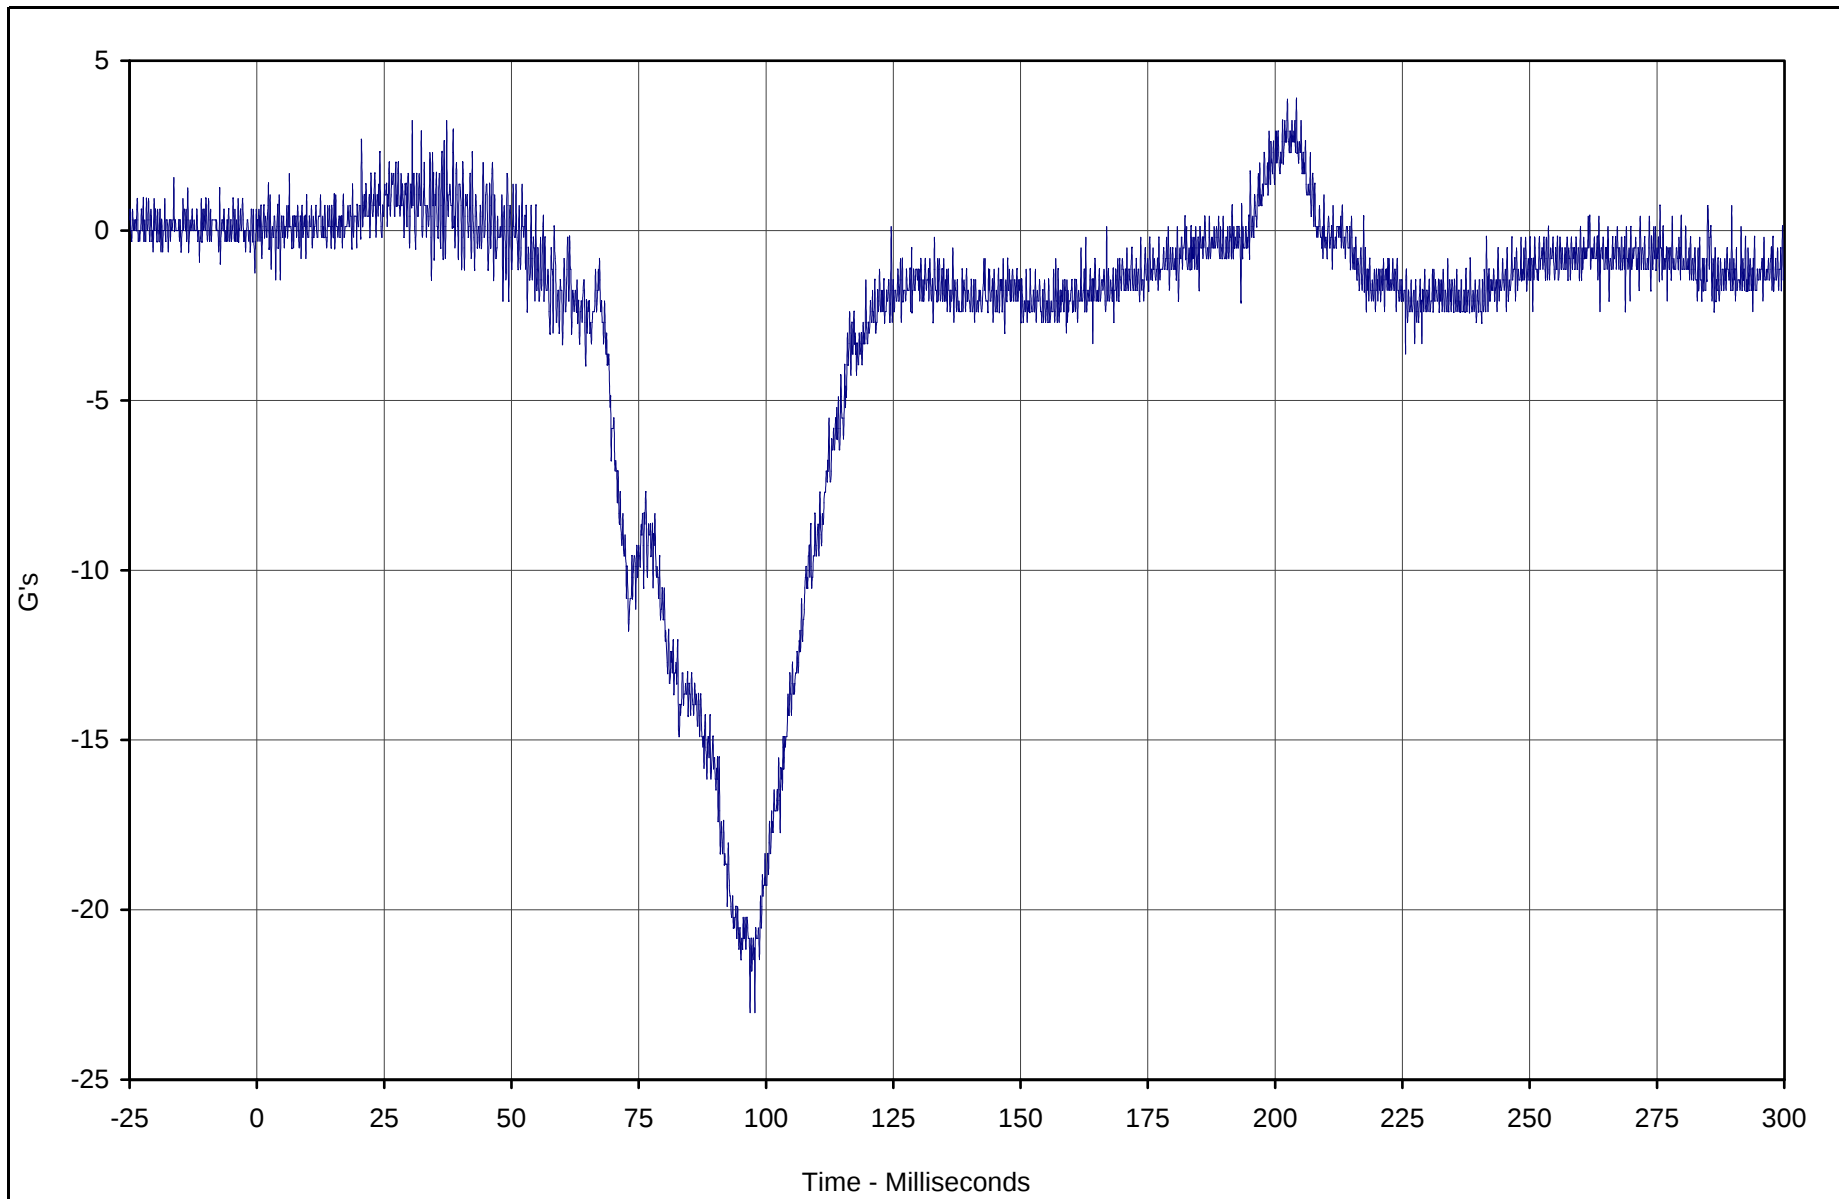

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Head Redundant Y	049	FIL	G's	3.9	202.4	-23.0	96.9	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

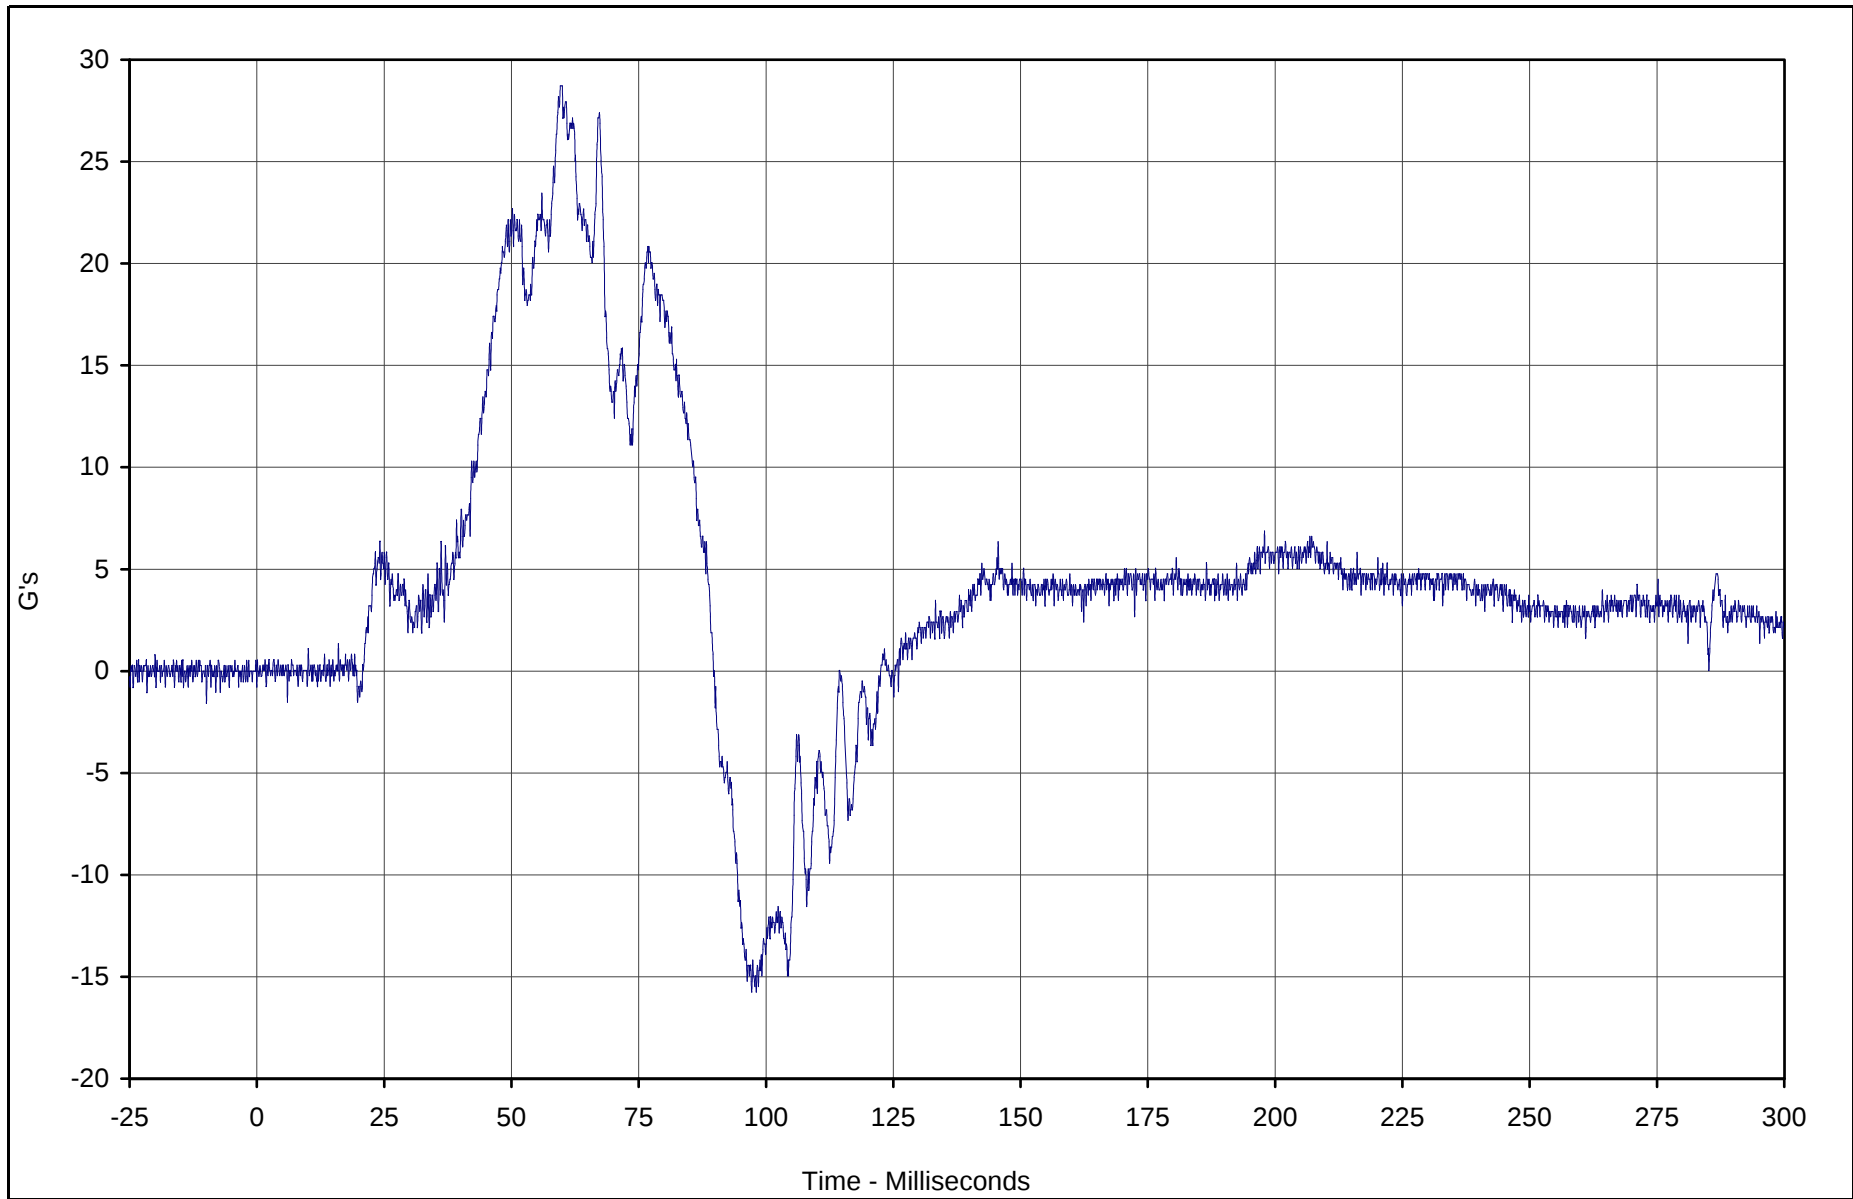

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Head Redundant Z	050	FIL	G's	28.7	59.6	-15.8	97.2	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

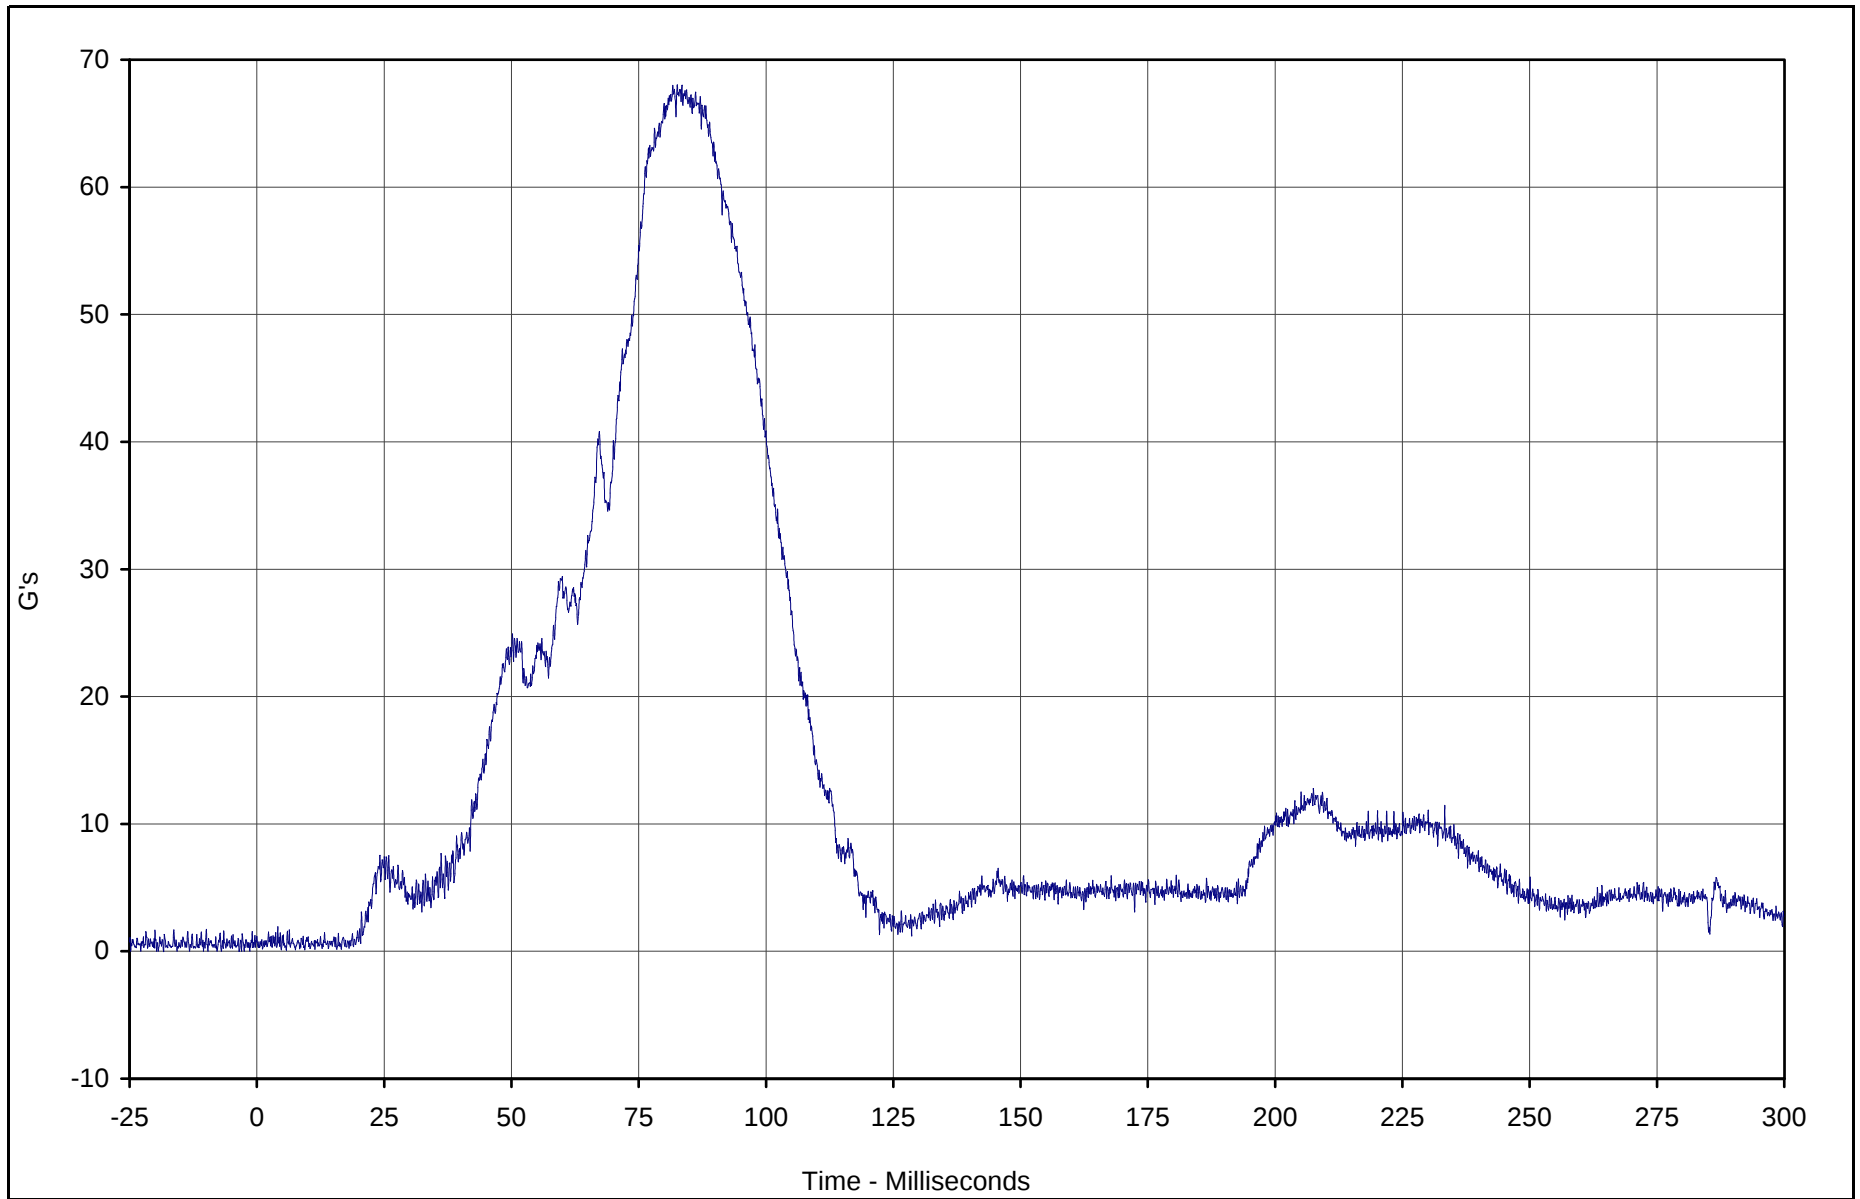

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Head Resultant Redundant	048	RES	G's	68.0	82.6	0.1	4.8	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

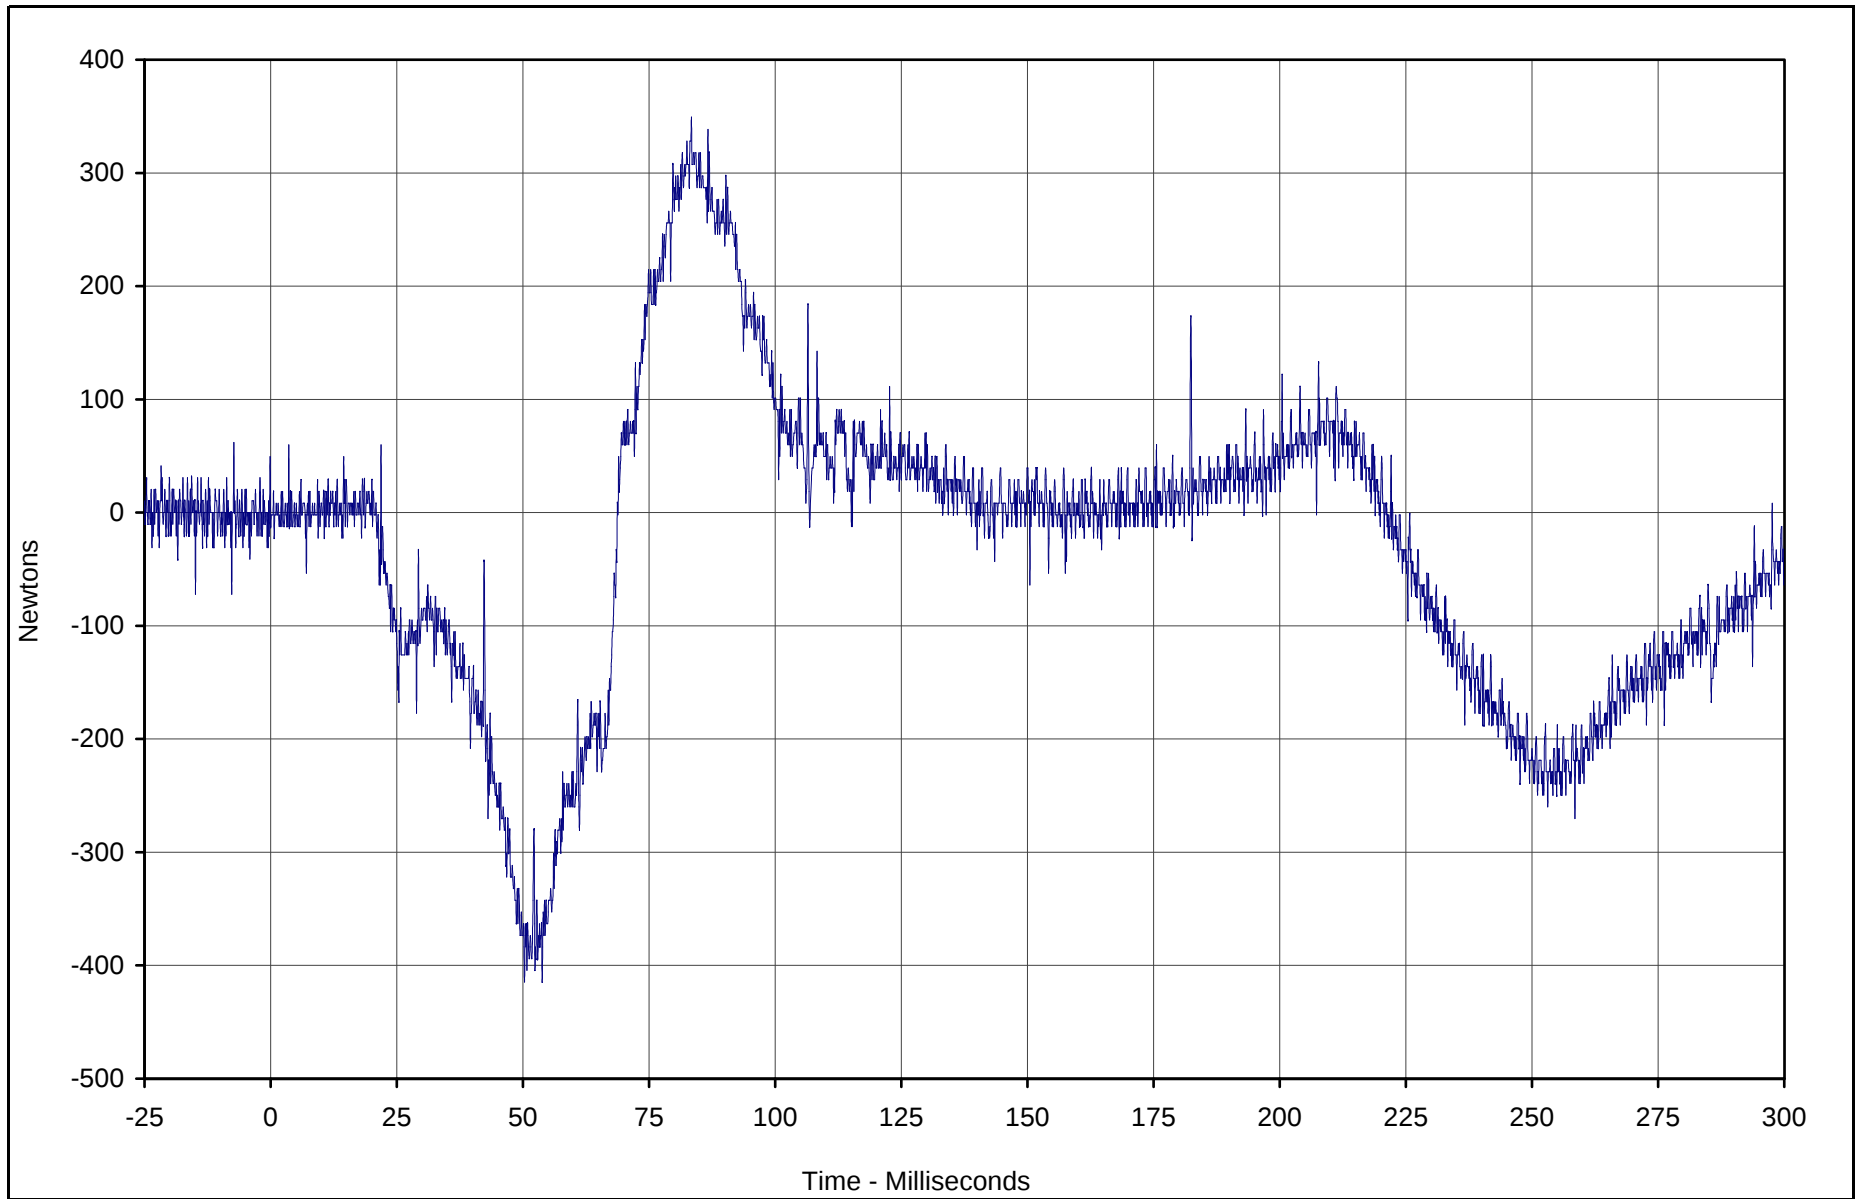

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Neck Force X	051	FIL	Newtons	348.8	83.4	-414.7	50.3	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

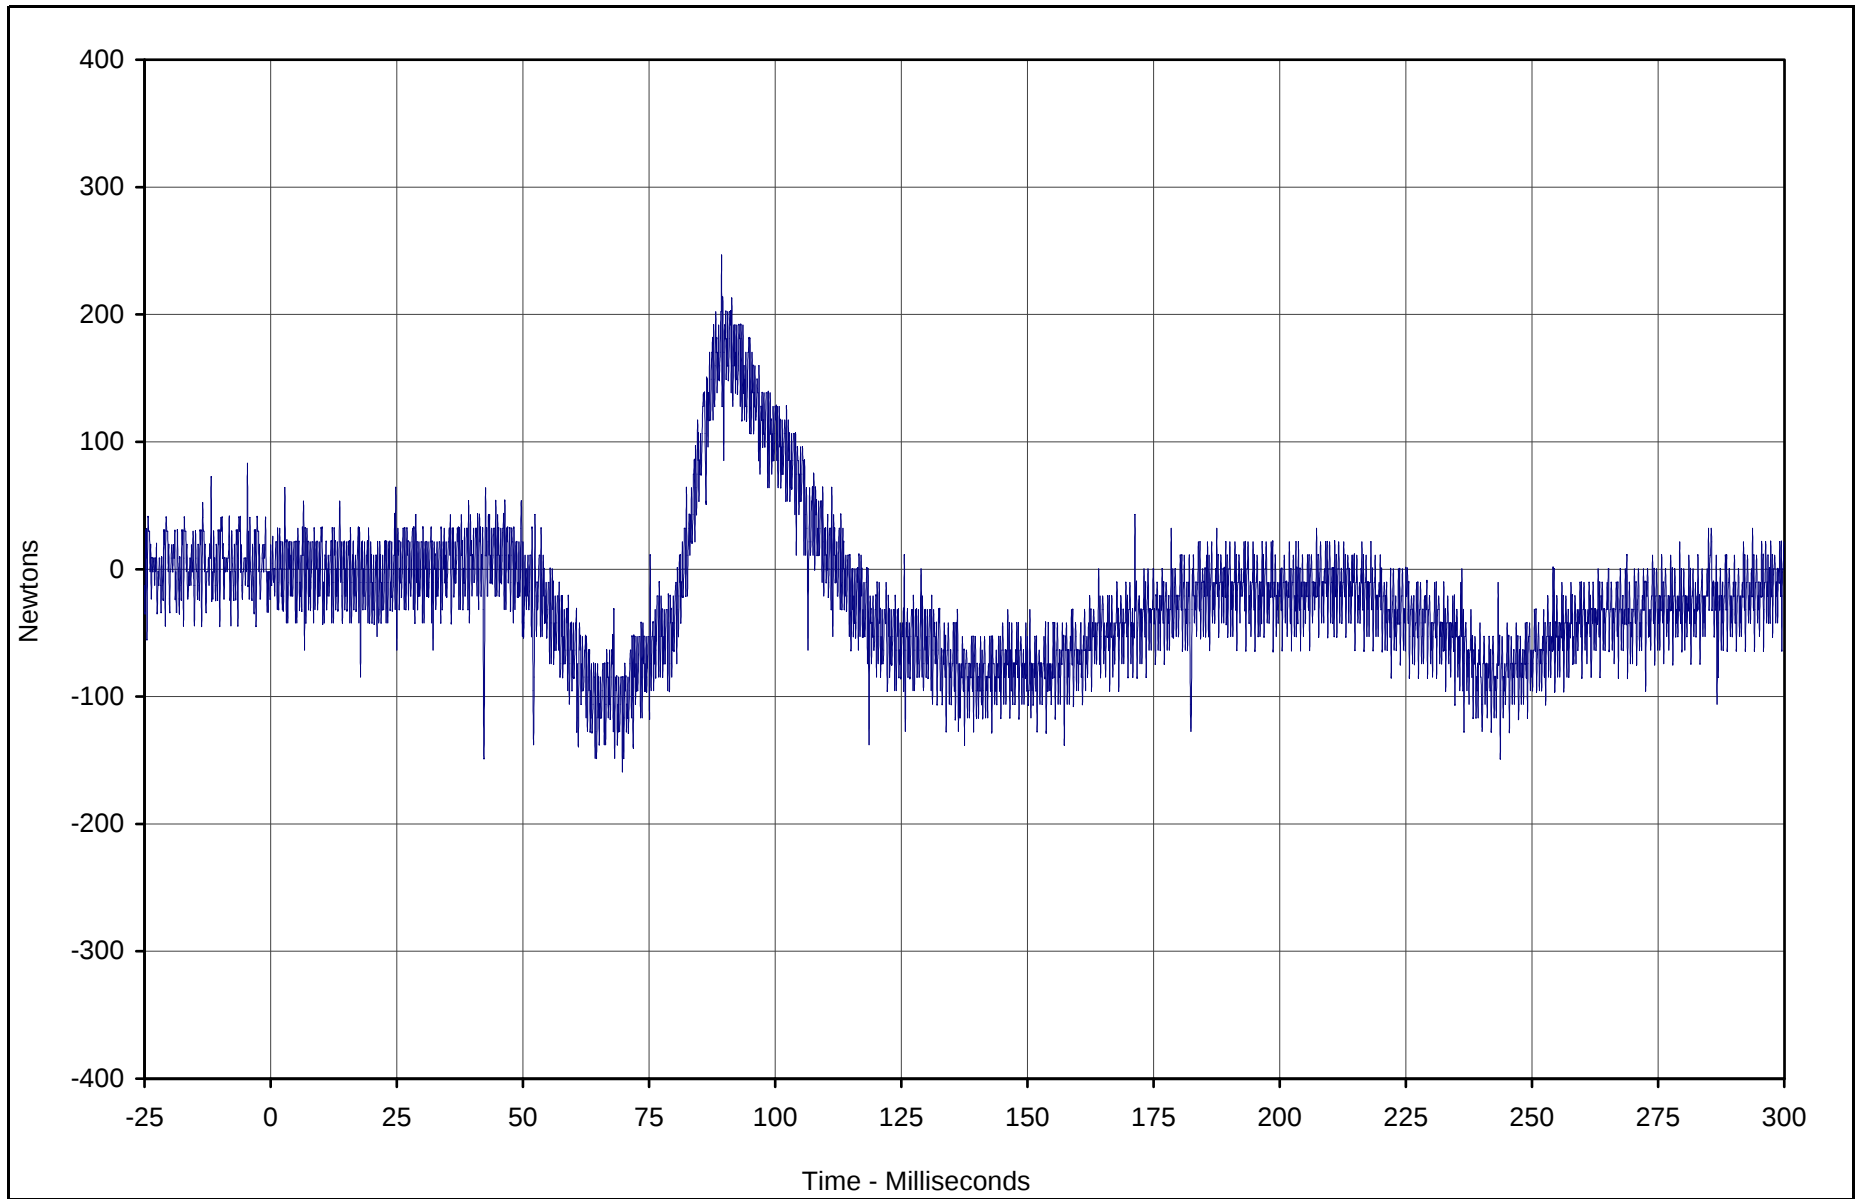

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Neck Force Y	052	FIL	Newtons	244.8	89.4	-159.2	69.7	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

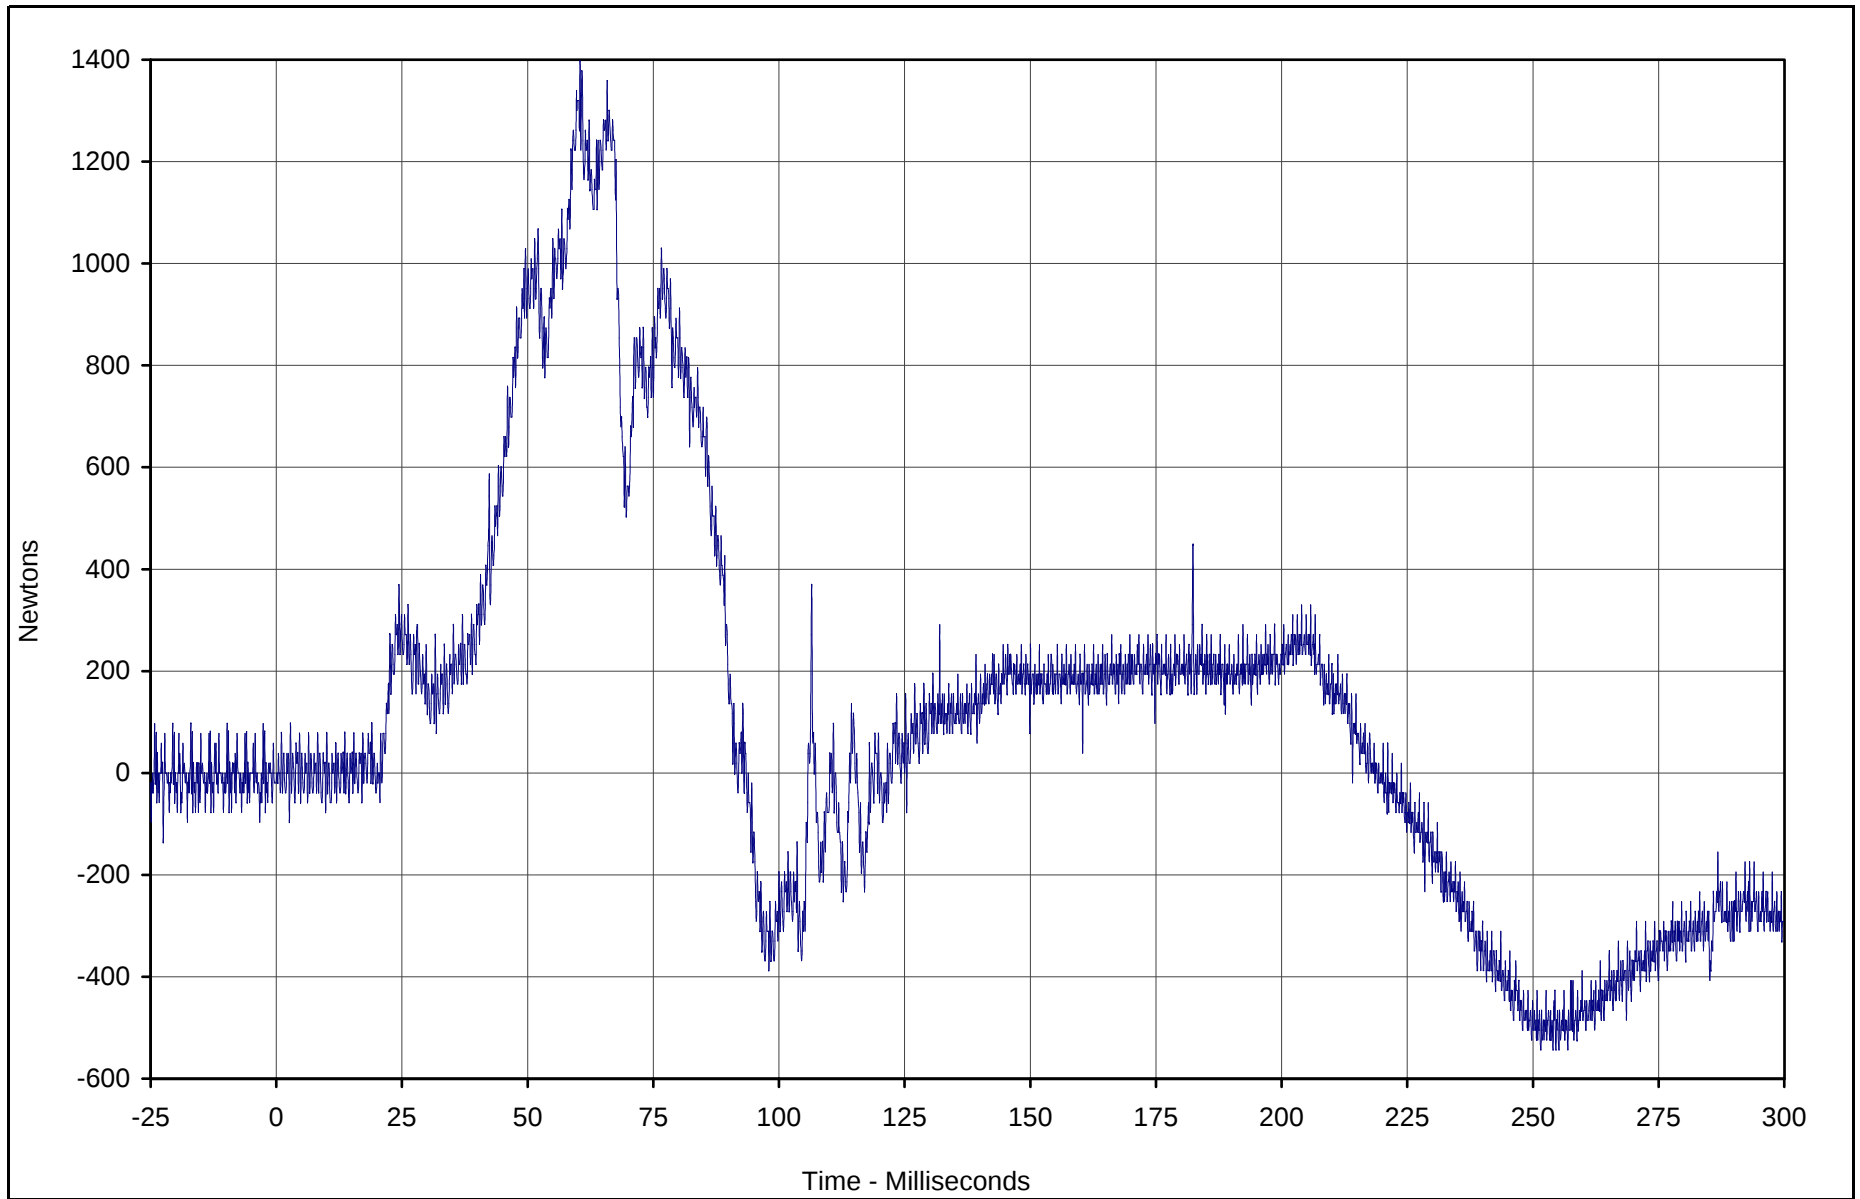

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Neck Force Z	053	FIL	Newtons	1397.5	60.4	-543.5	251.5	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

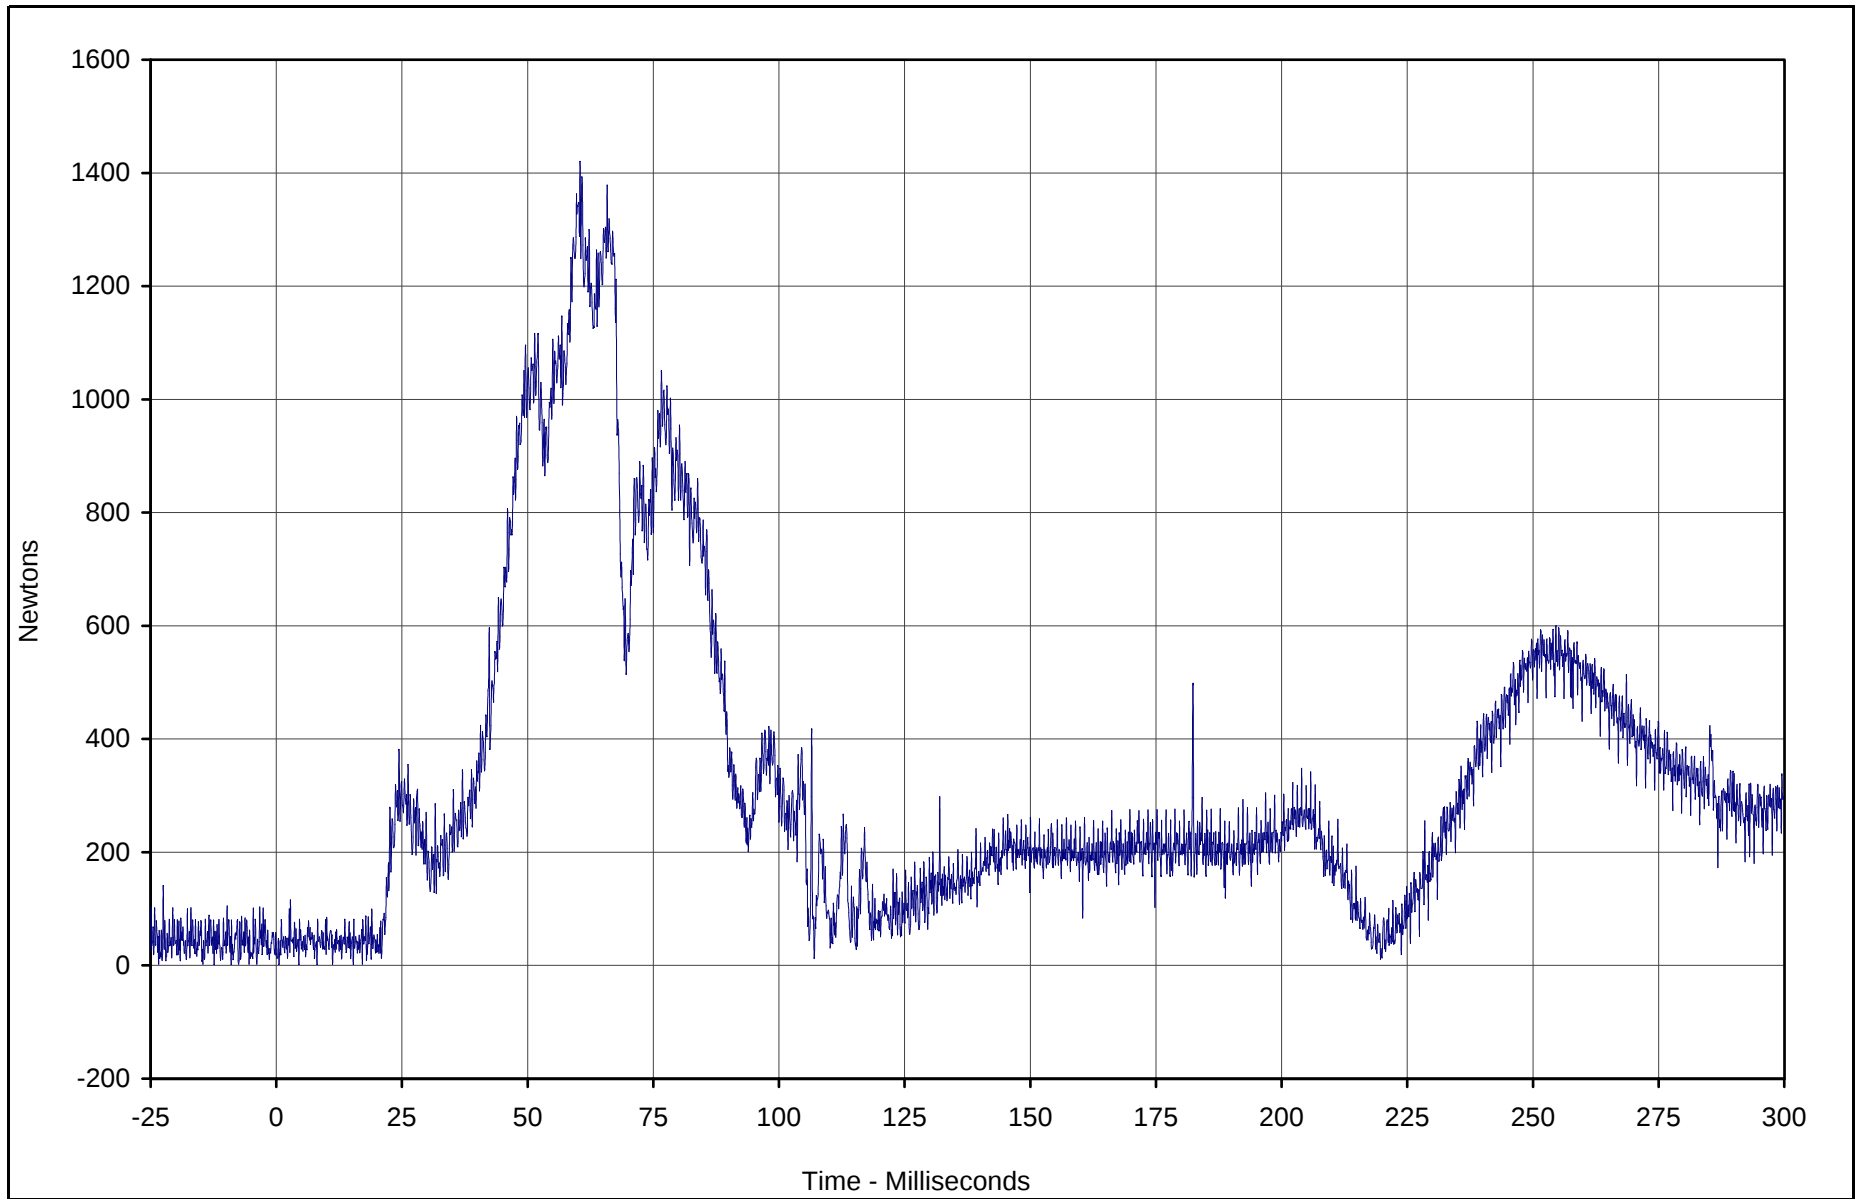

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Neck Force Resultant	051	RES	Newtons	1420.2	60.4	2.0	0.5	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

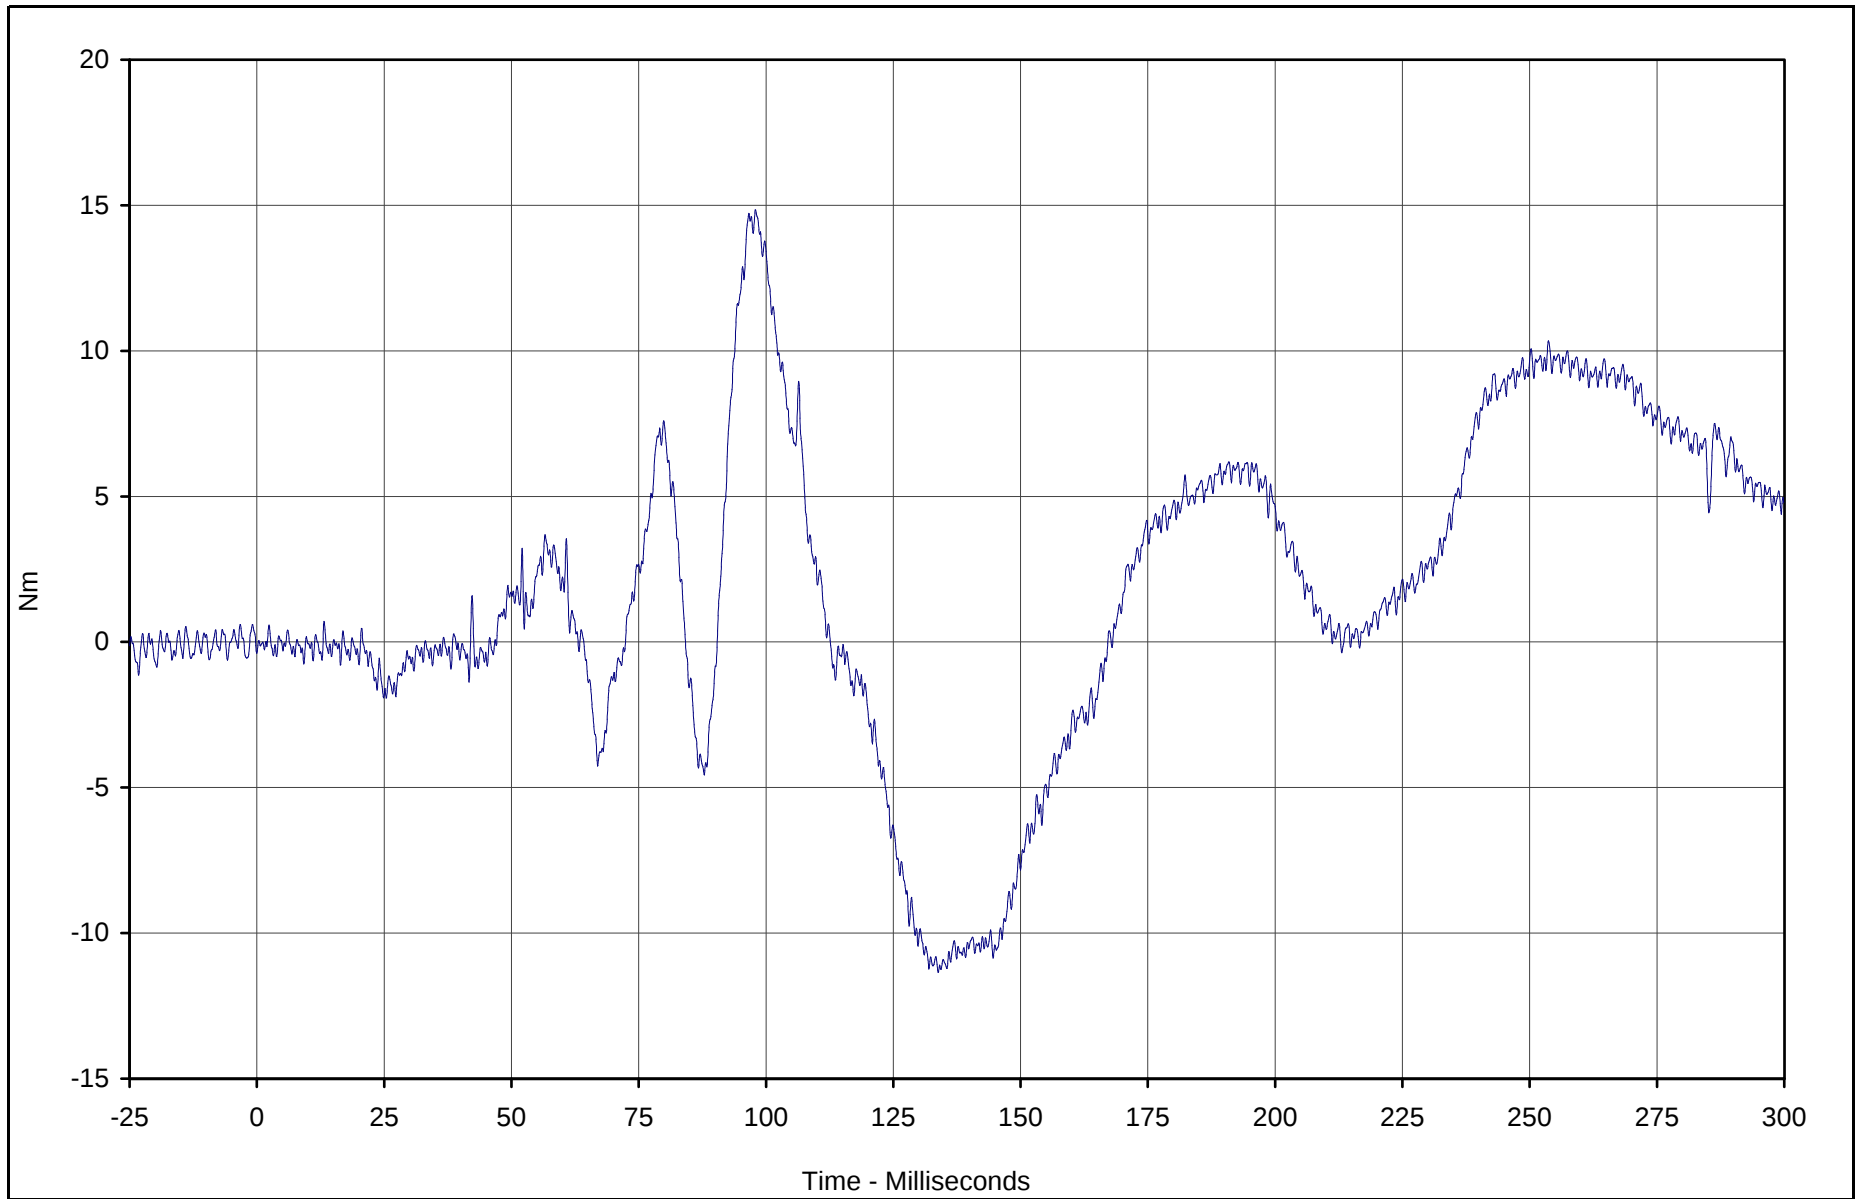

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Neck Moment X	054	FIL	Nm	14.8	97.9	-11.4	133.8	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

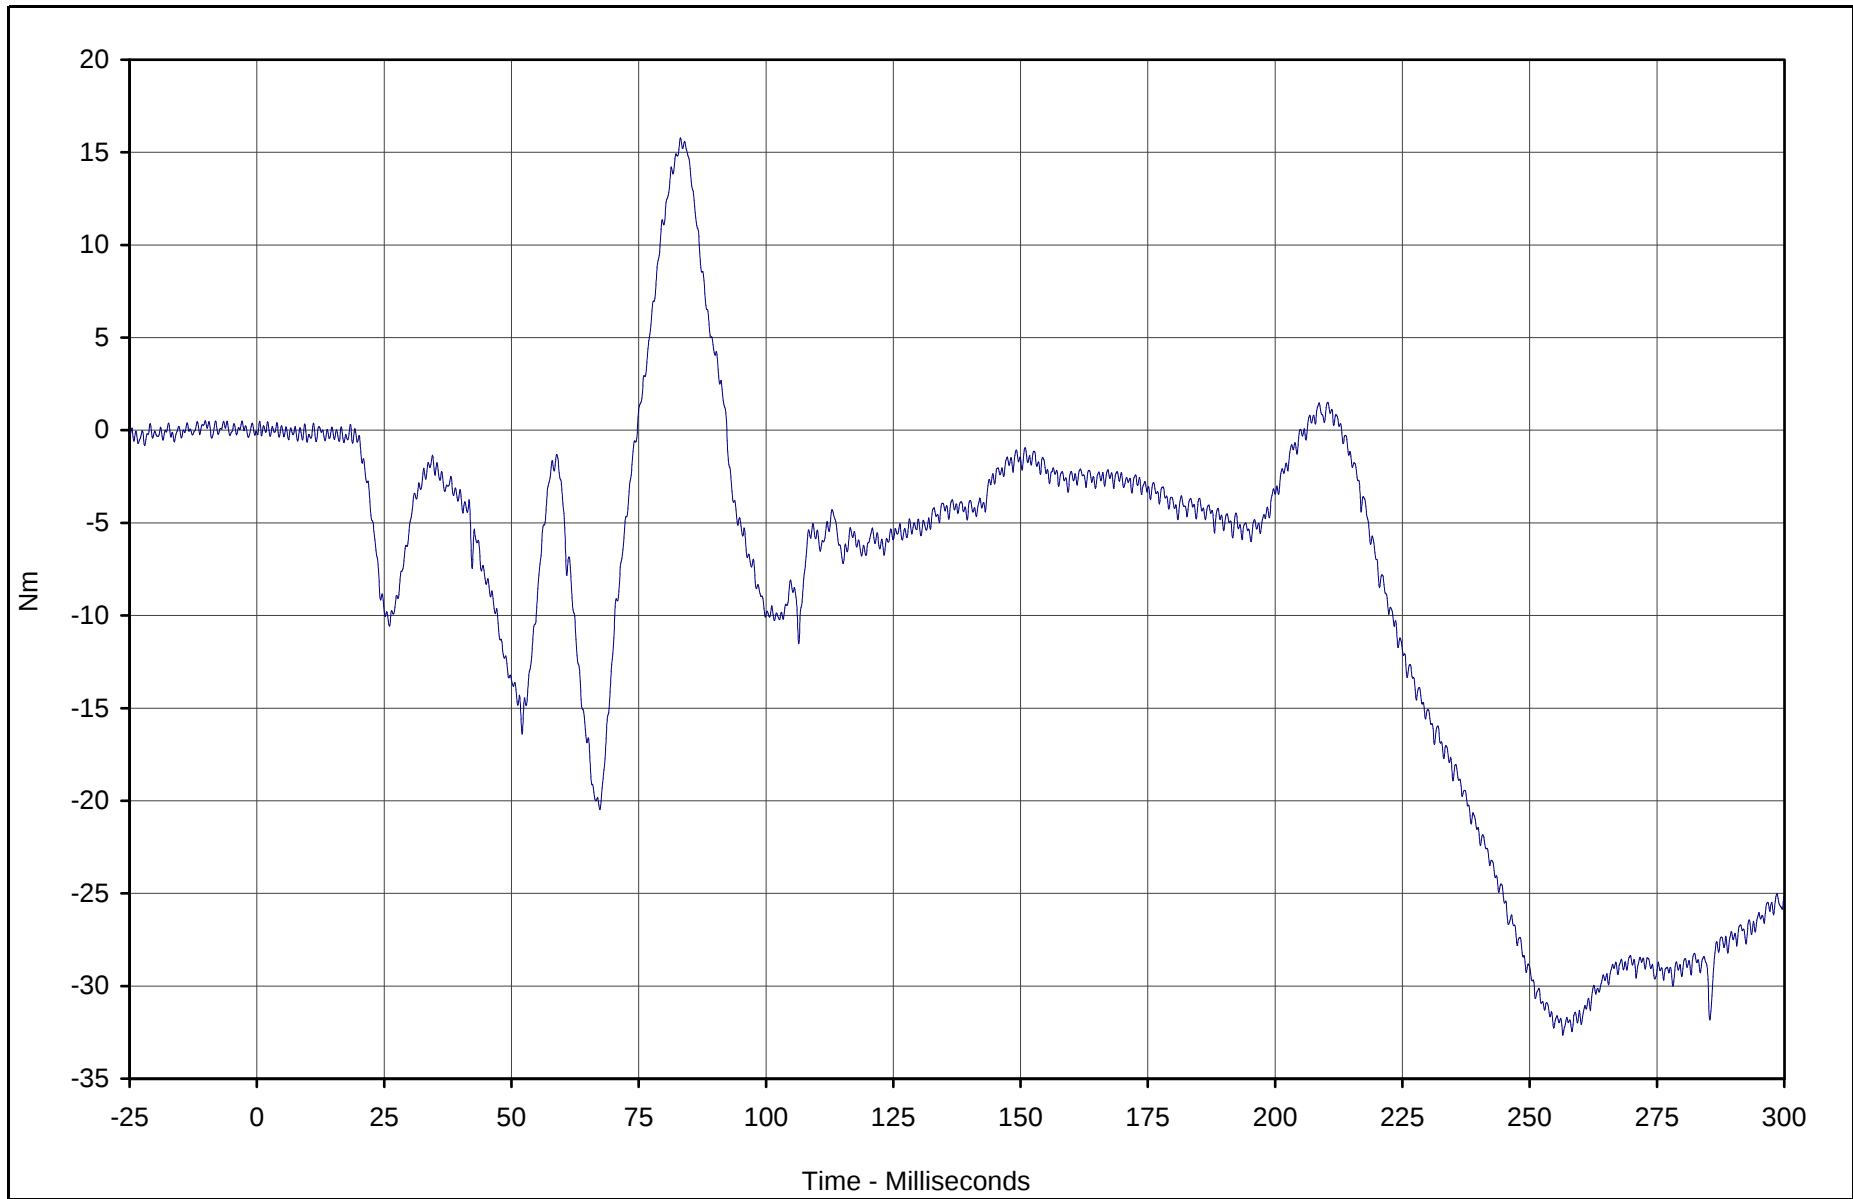

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Neck Moment Y	055	FIL	Nm	15.8	83.2	-32.7	256.5	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

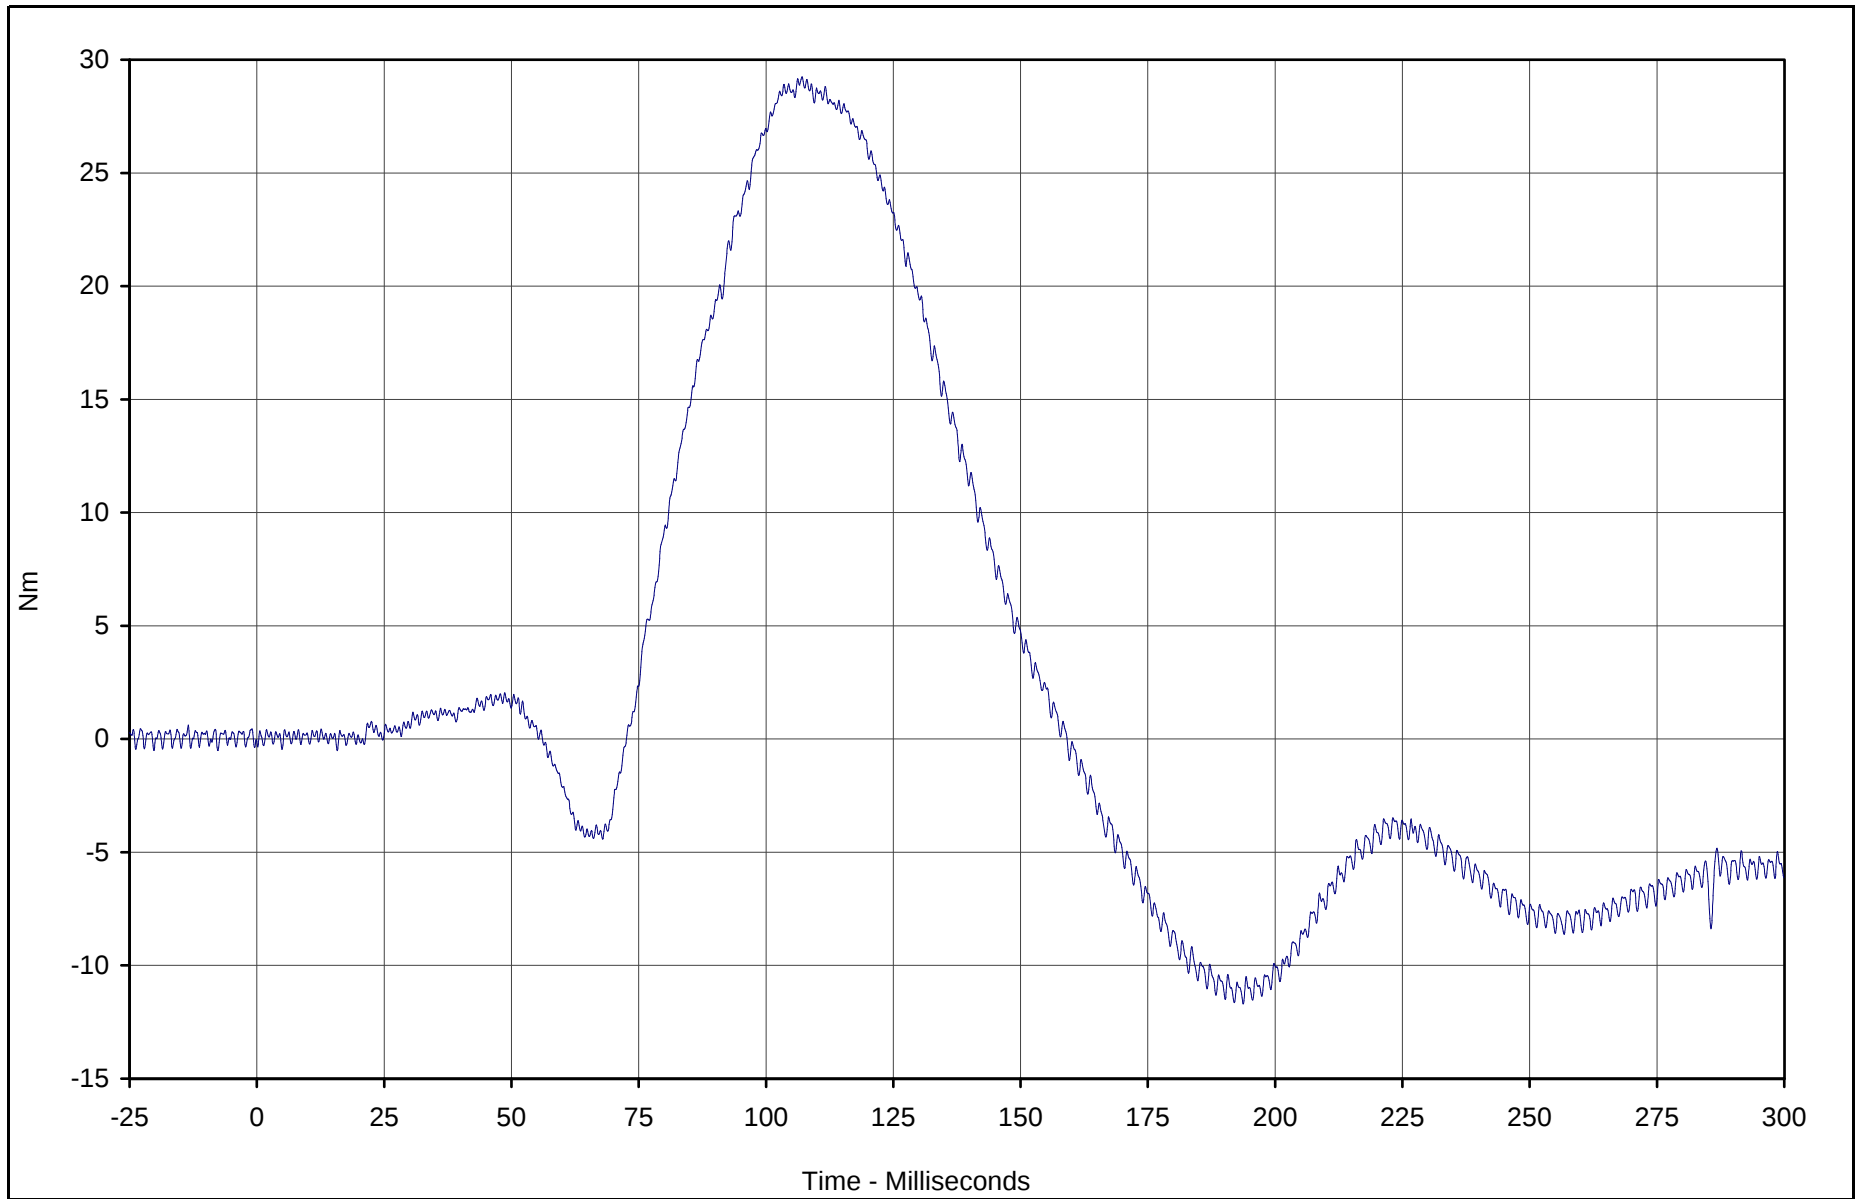

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Neck Moment Z	056	FIL	Nm	29.2	107.1	-11.7	193.7	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

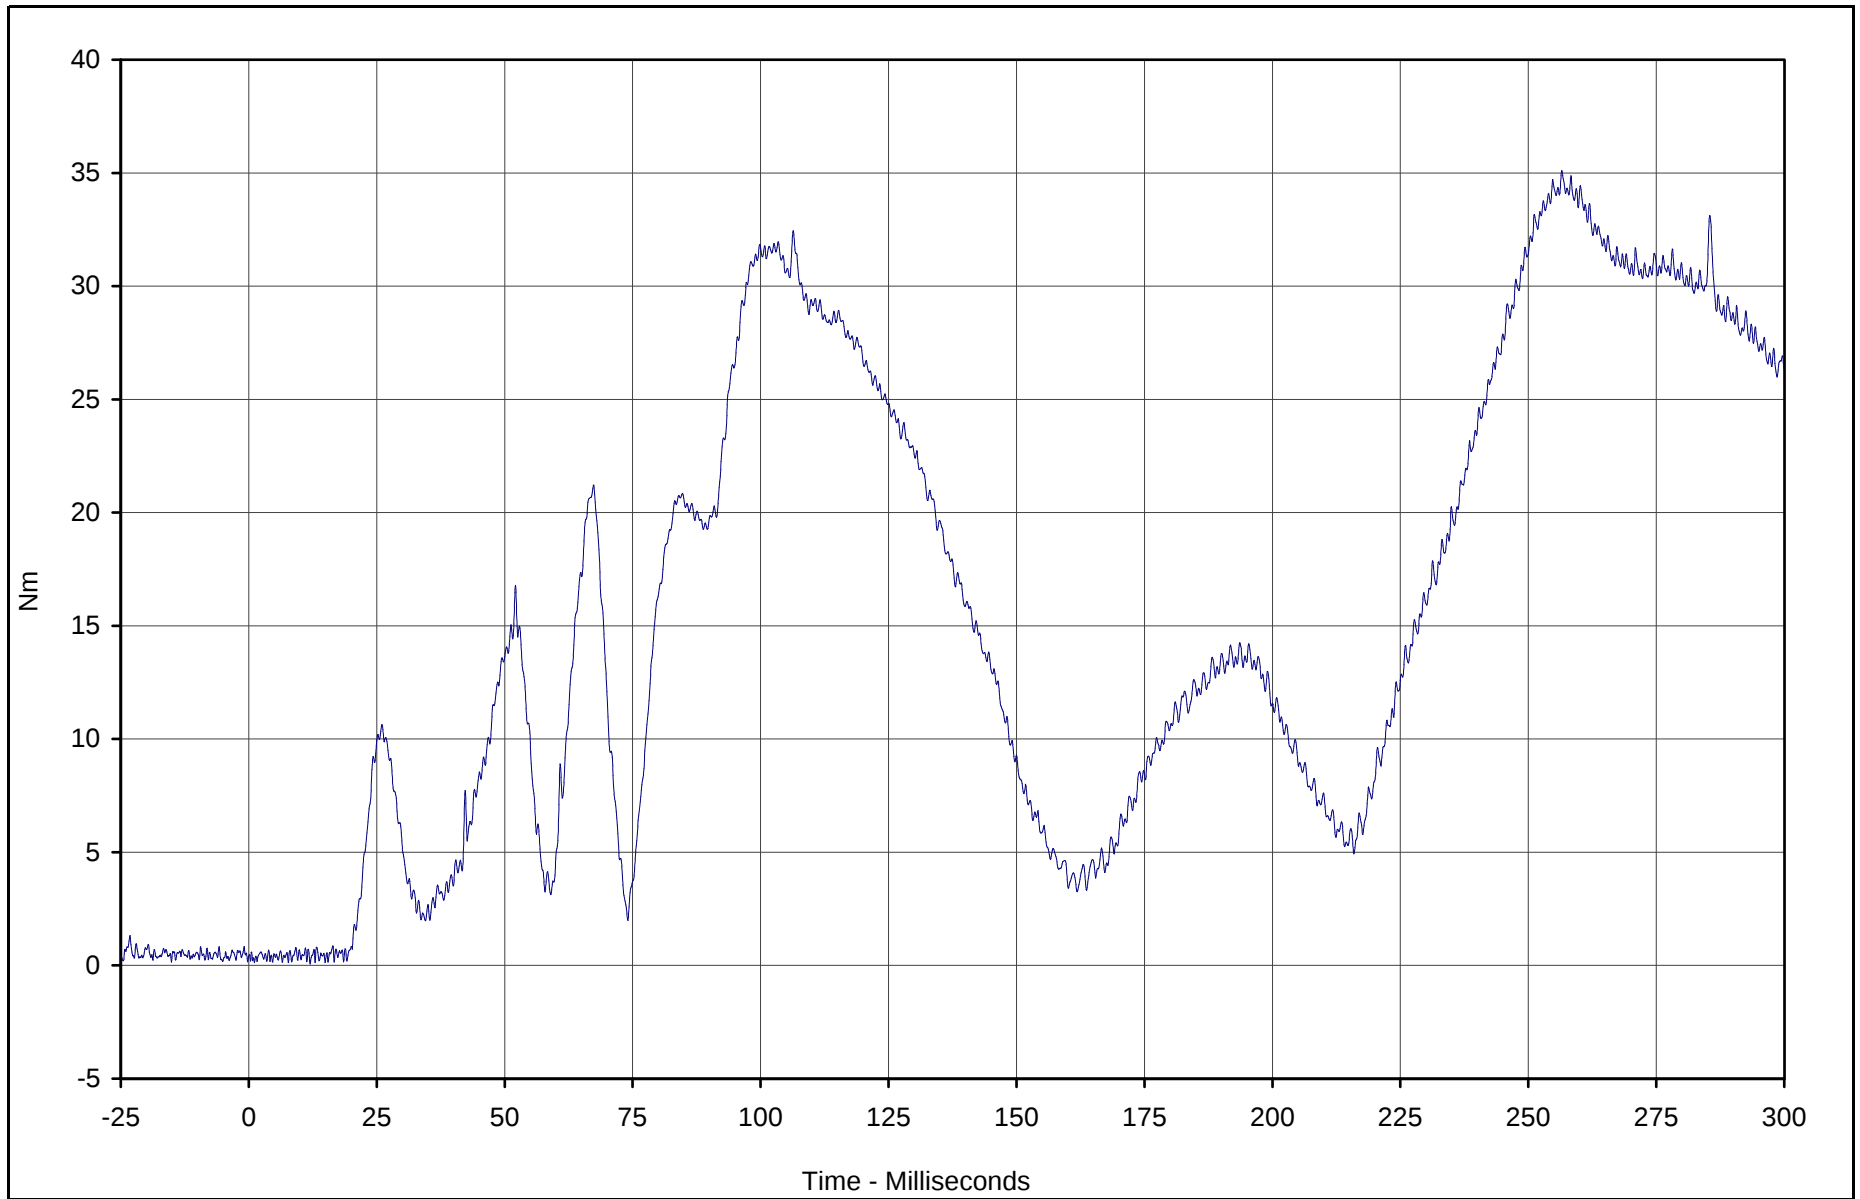

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Neck Moment Resultant	054	RES	Nm	35.1	256.5	0.1	12.0	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

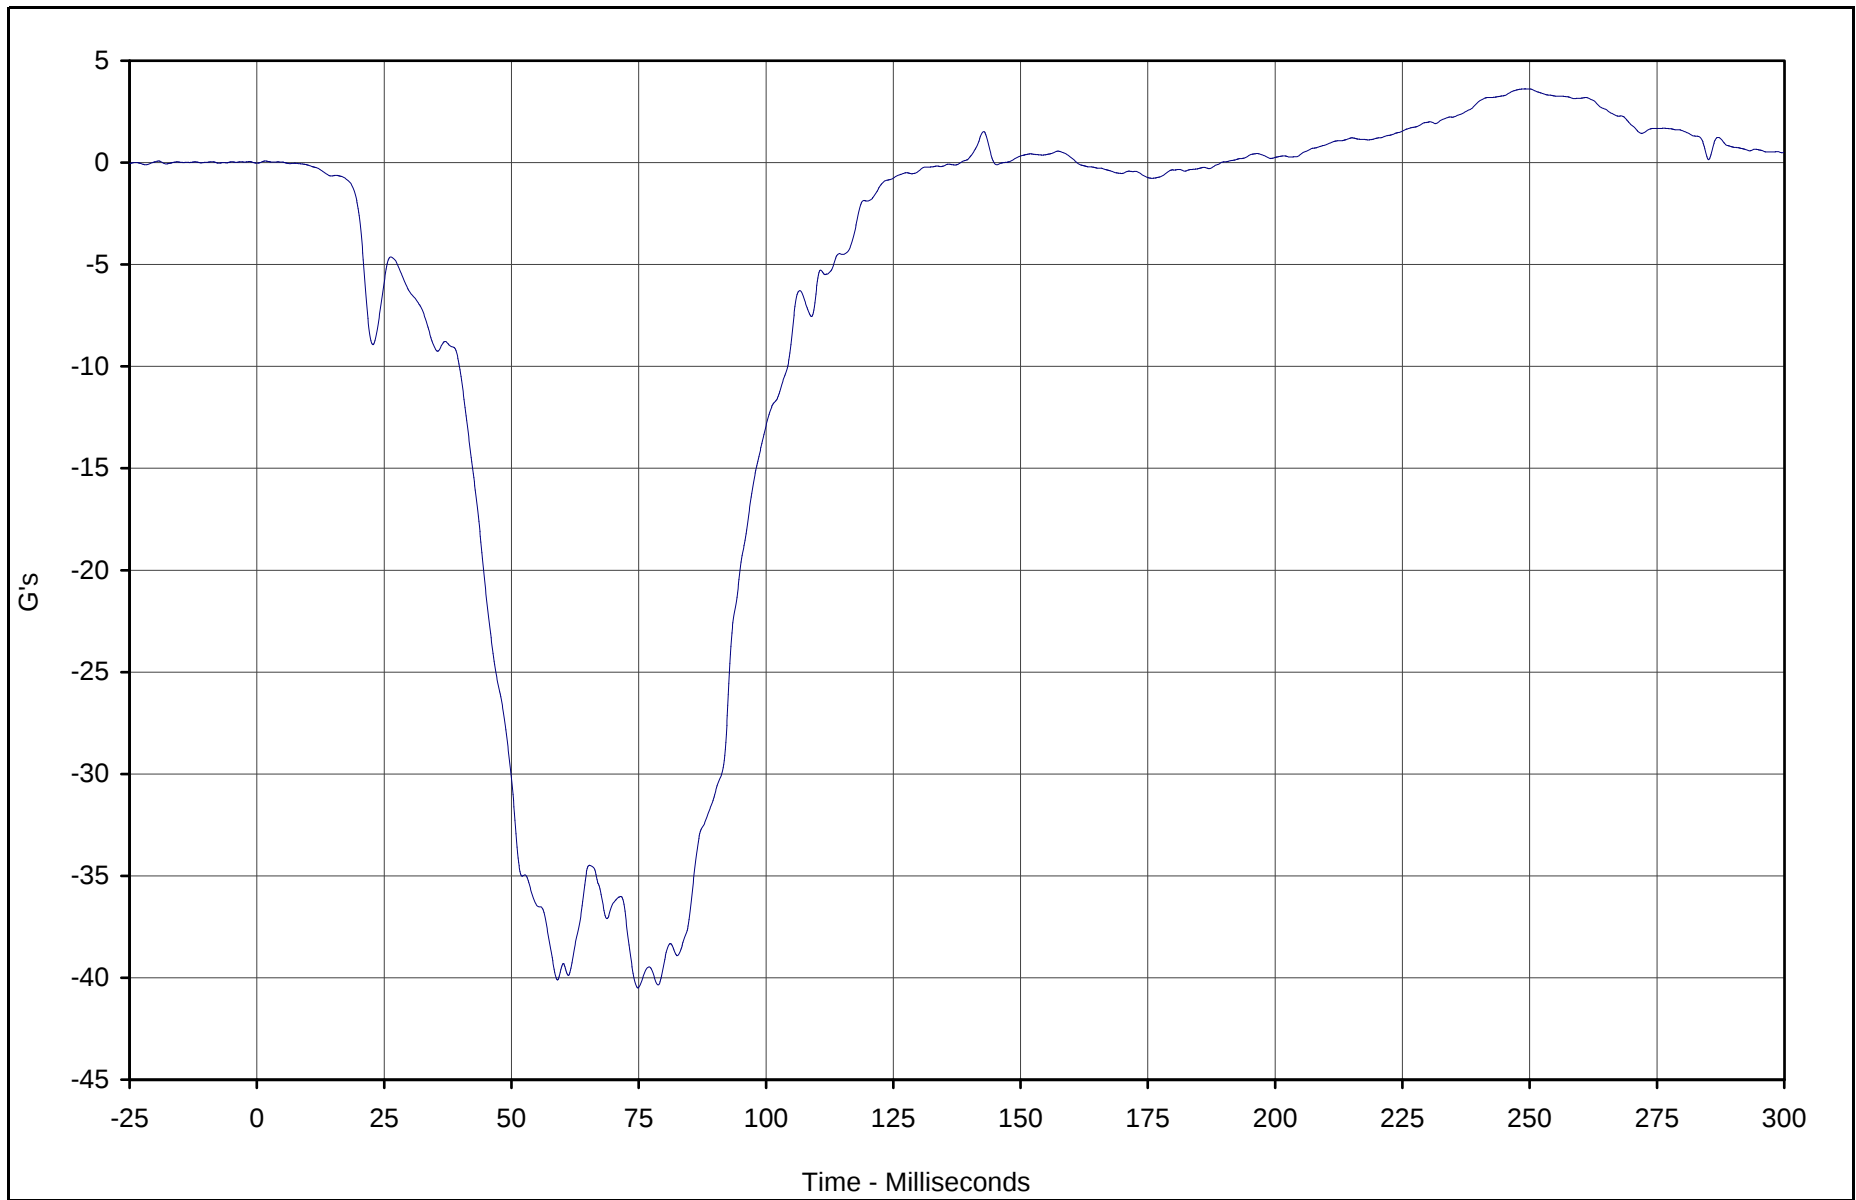

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Chest Primary X	057	FIL	G's	3.6	249.1	-40.5	74.8	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

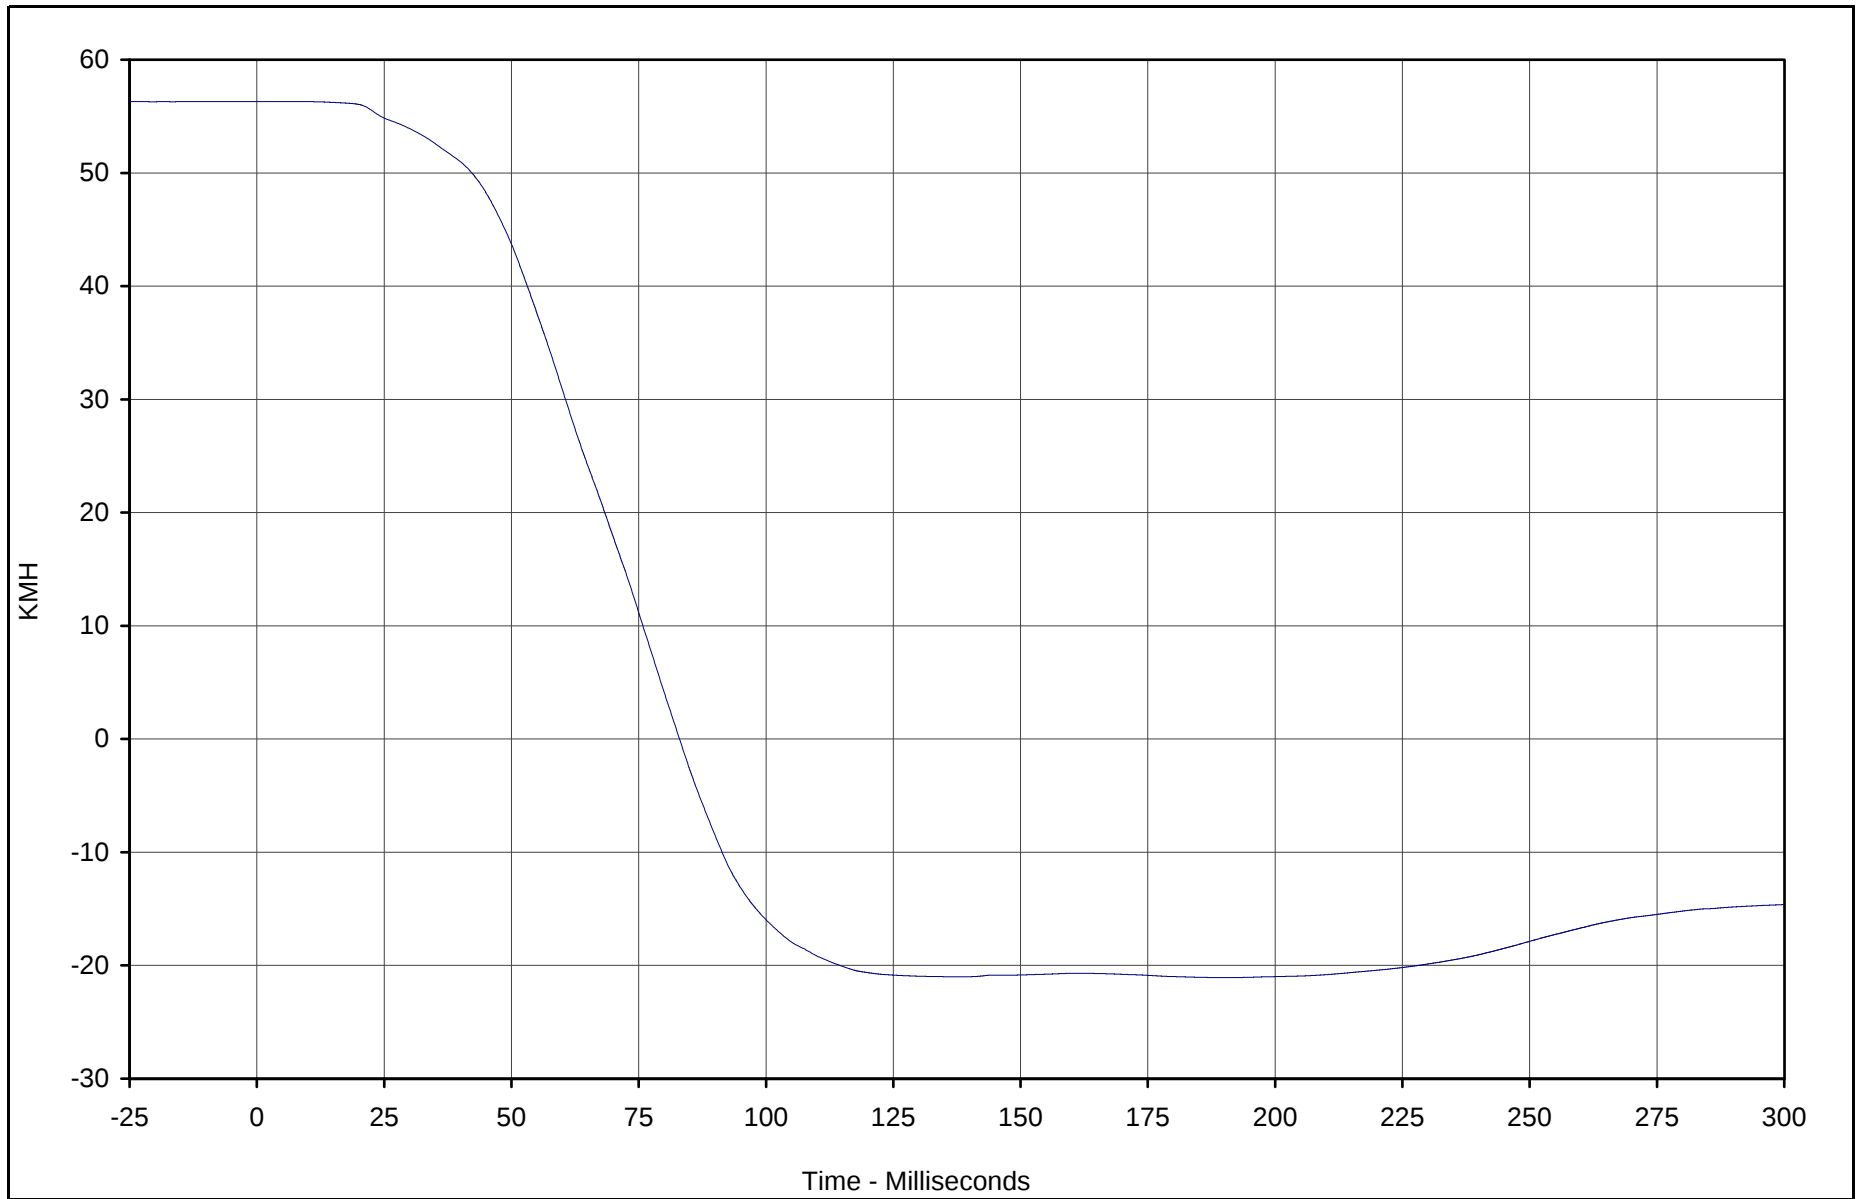

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Chest Primary X Velocity	057	IN1	KMH	56.3	5.5	-21.1	189.4	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

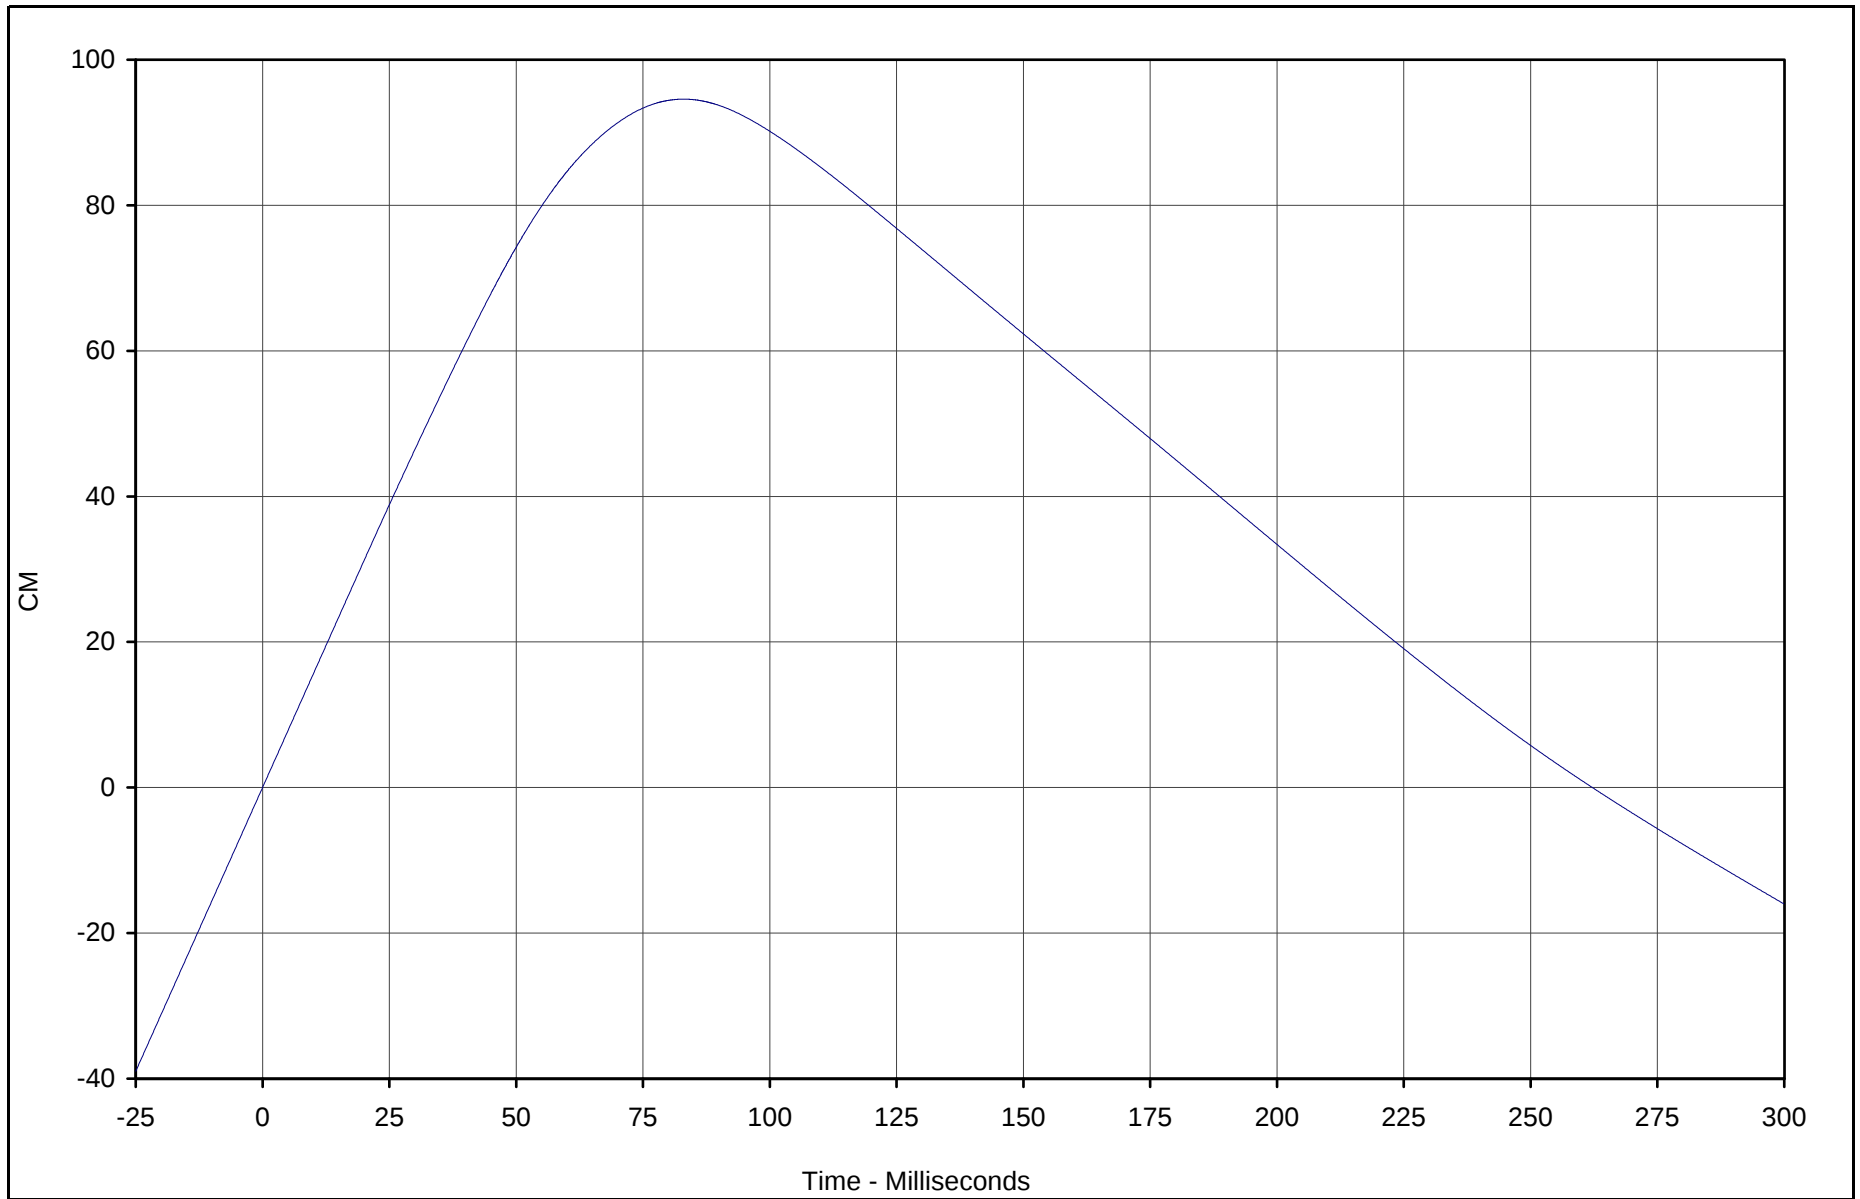

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Chest Primary X Displ.	057	IN2	CM	94.6	83.0	-16.0	299.9	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

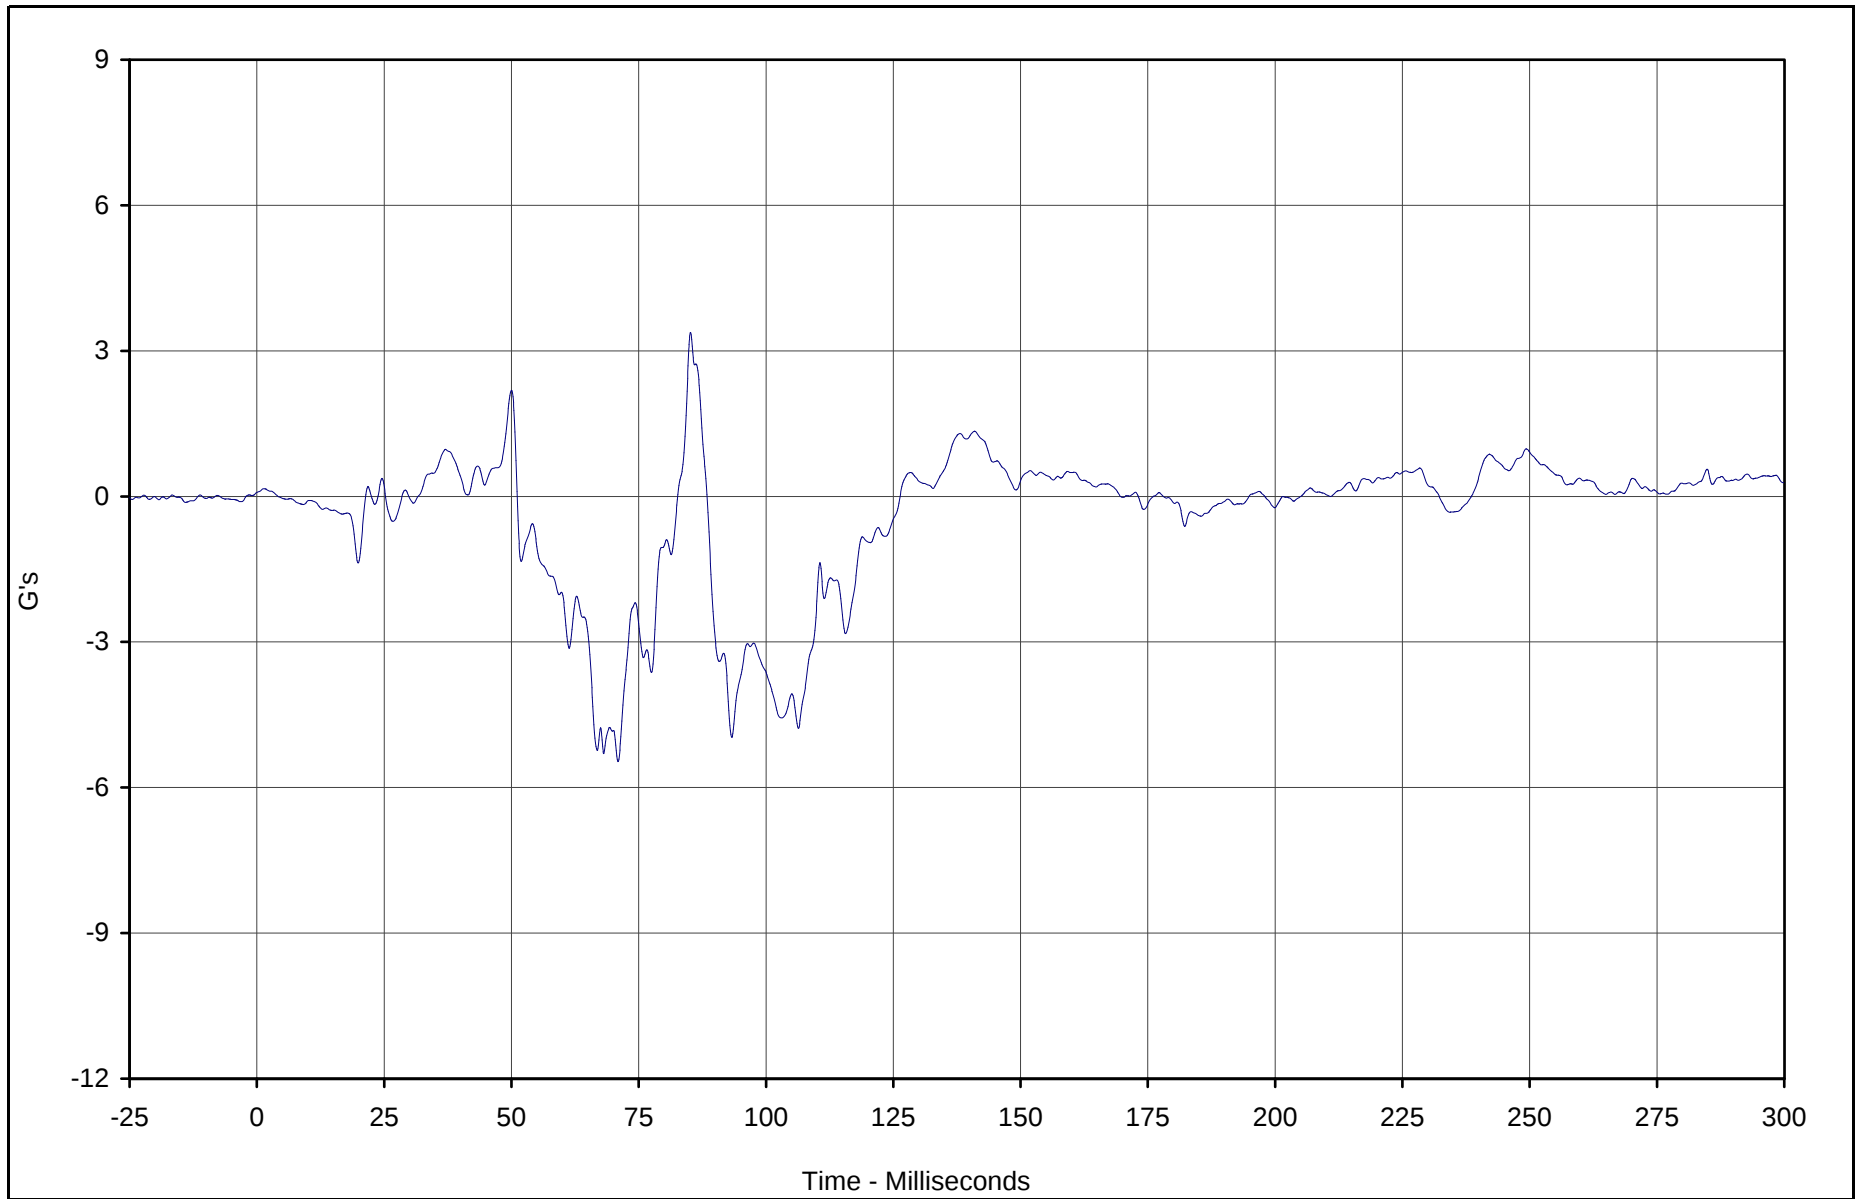

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Chest Primary Y	058	FIL	G's	3.4	85.2	-5.5	70.9	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

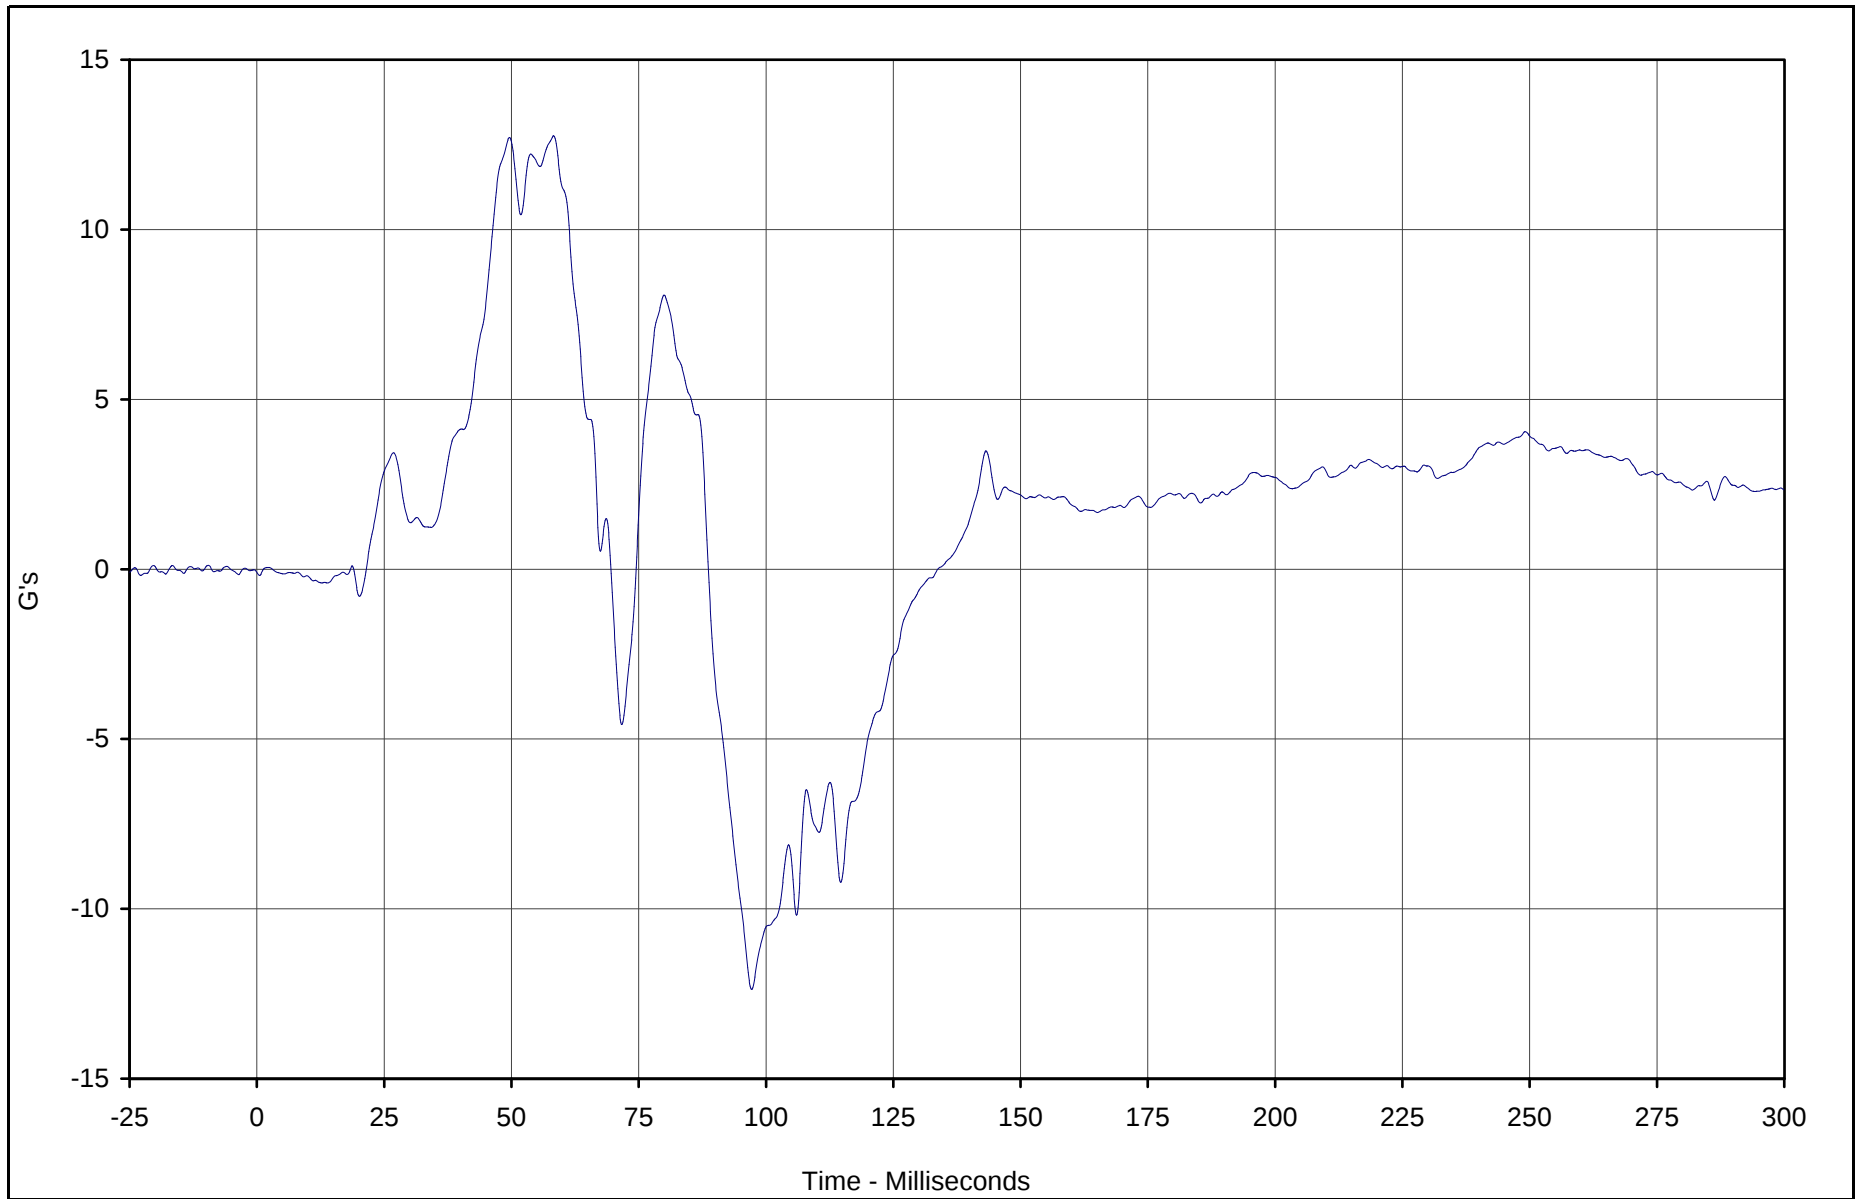

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Chest Primary Z	059	FIL	G's	12.8	58.3	-12.4	97.2	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

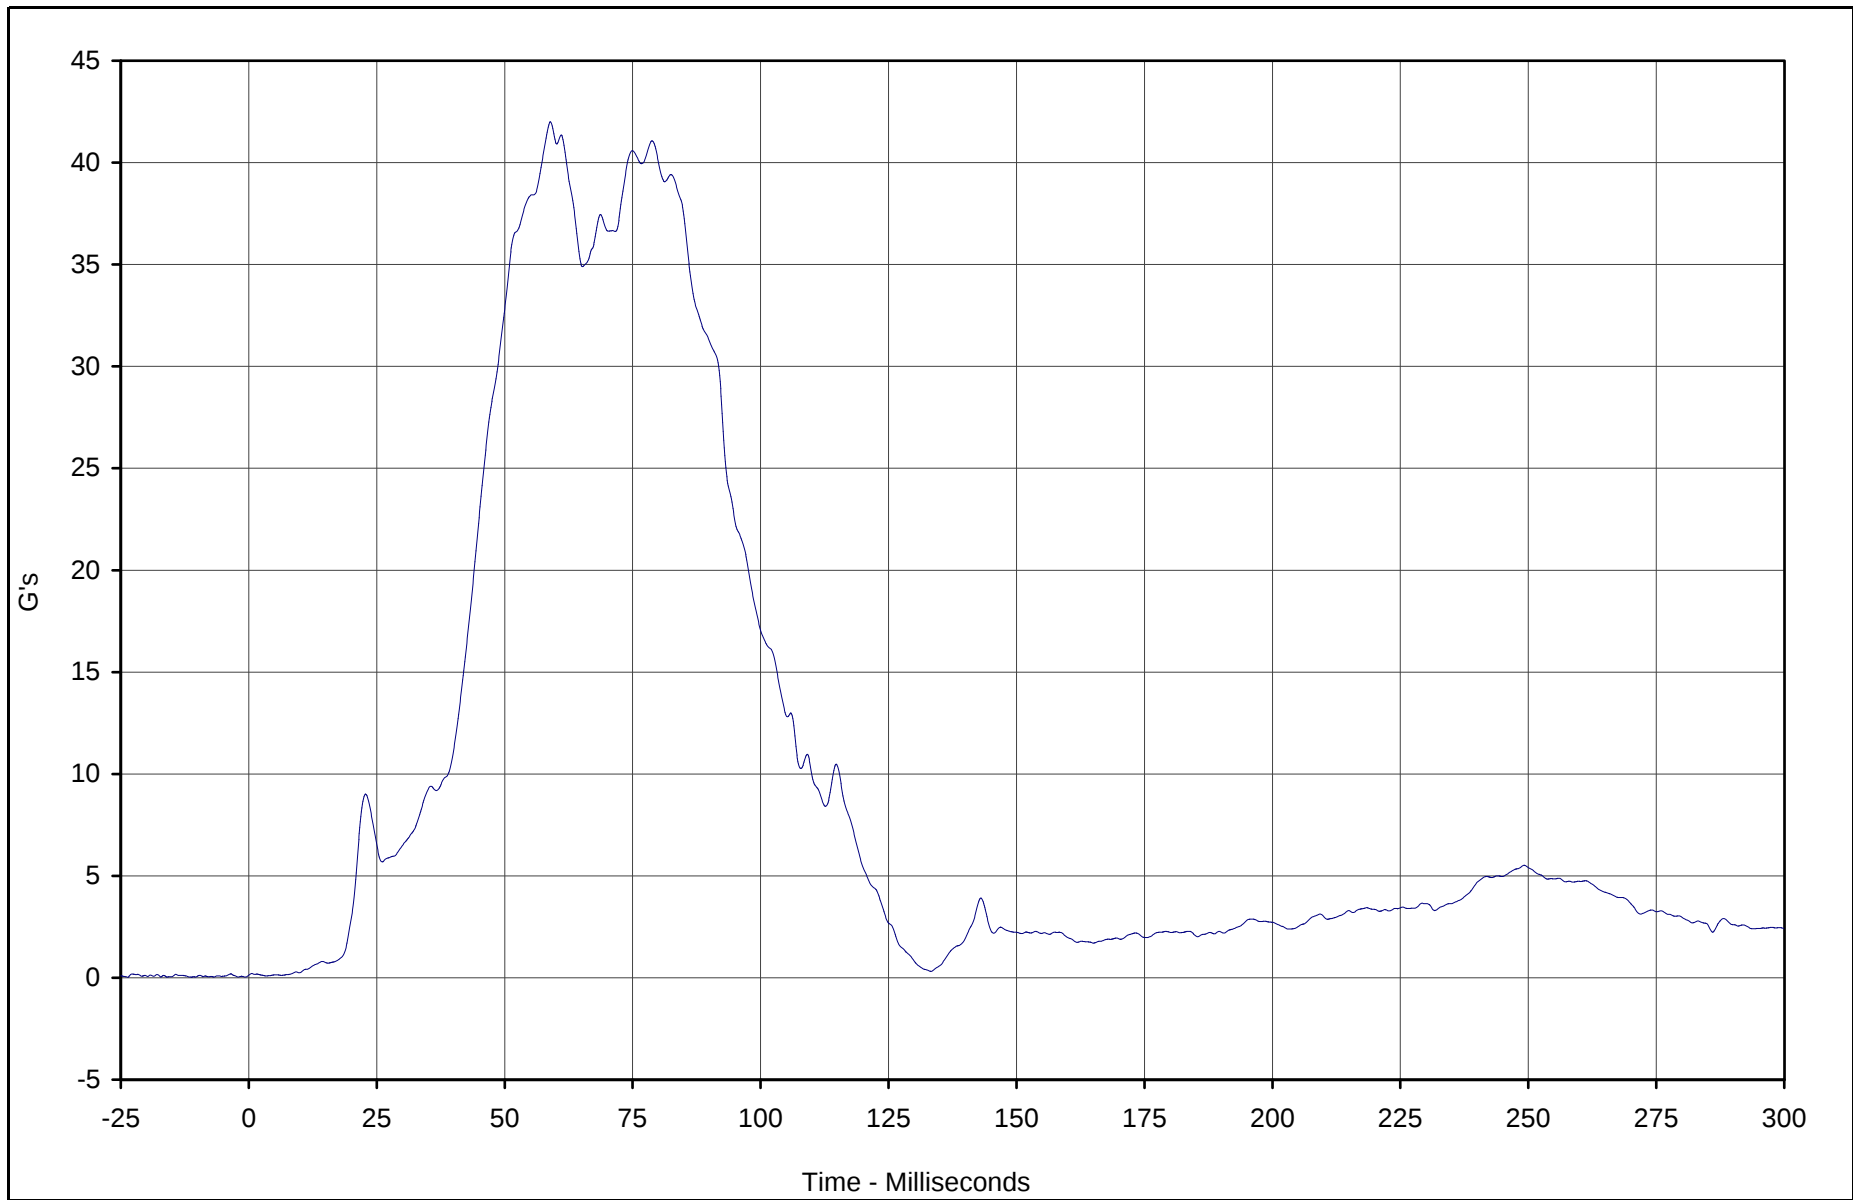

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Chest Resultant Primary	057	RES	G's	42.0	58.9	0.1	3.4	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

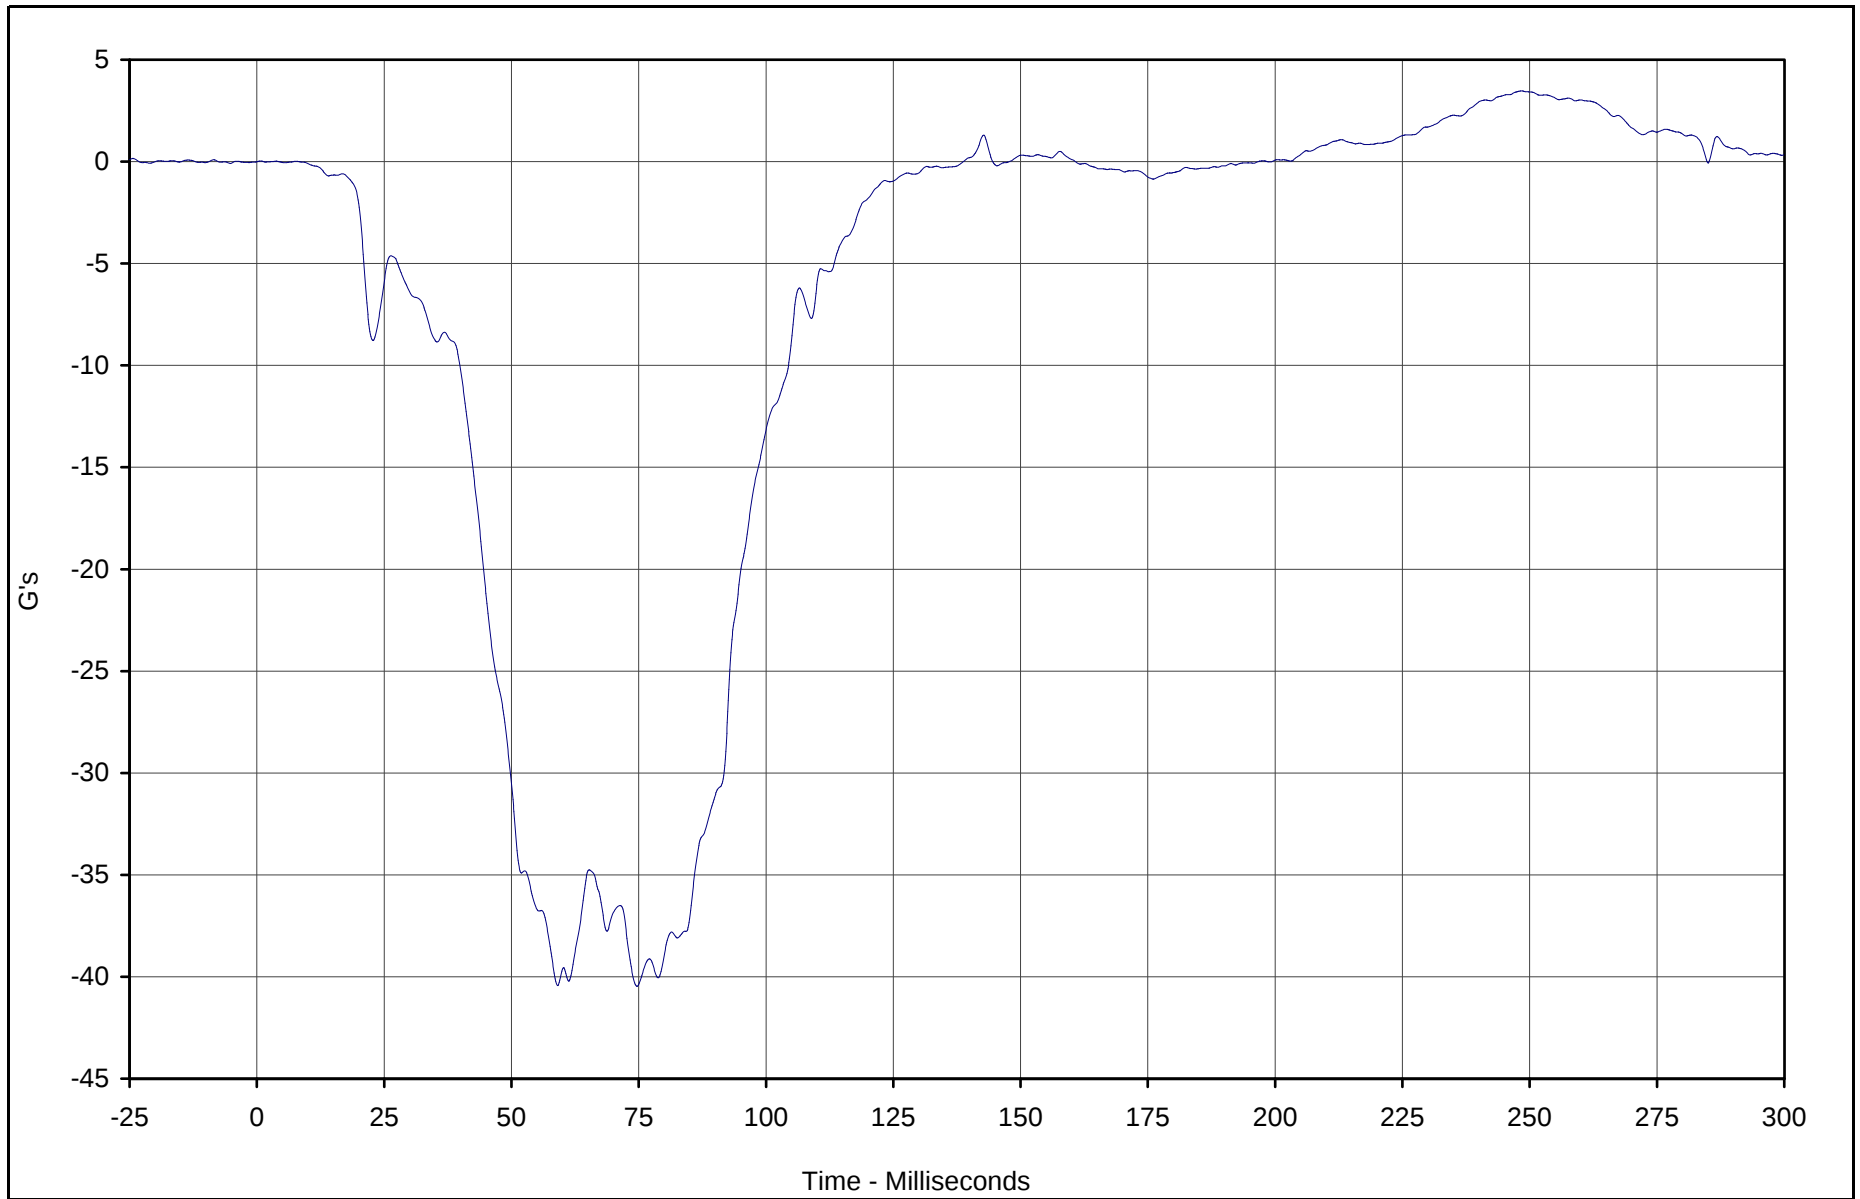

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Chest Redundant X	060	FIL	G's	3.5	248.4	-40.5	74.7	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

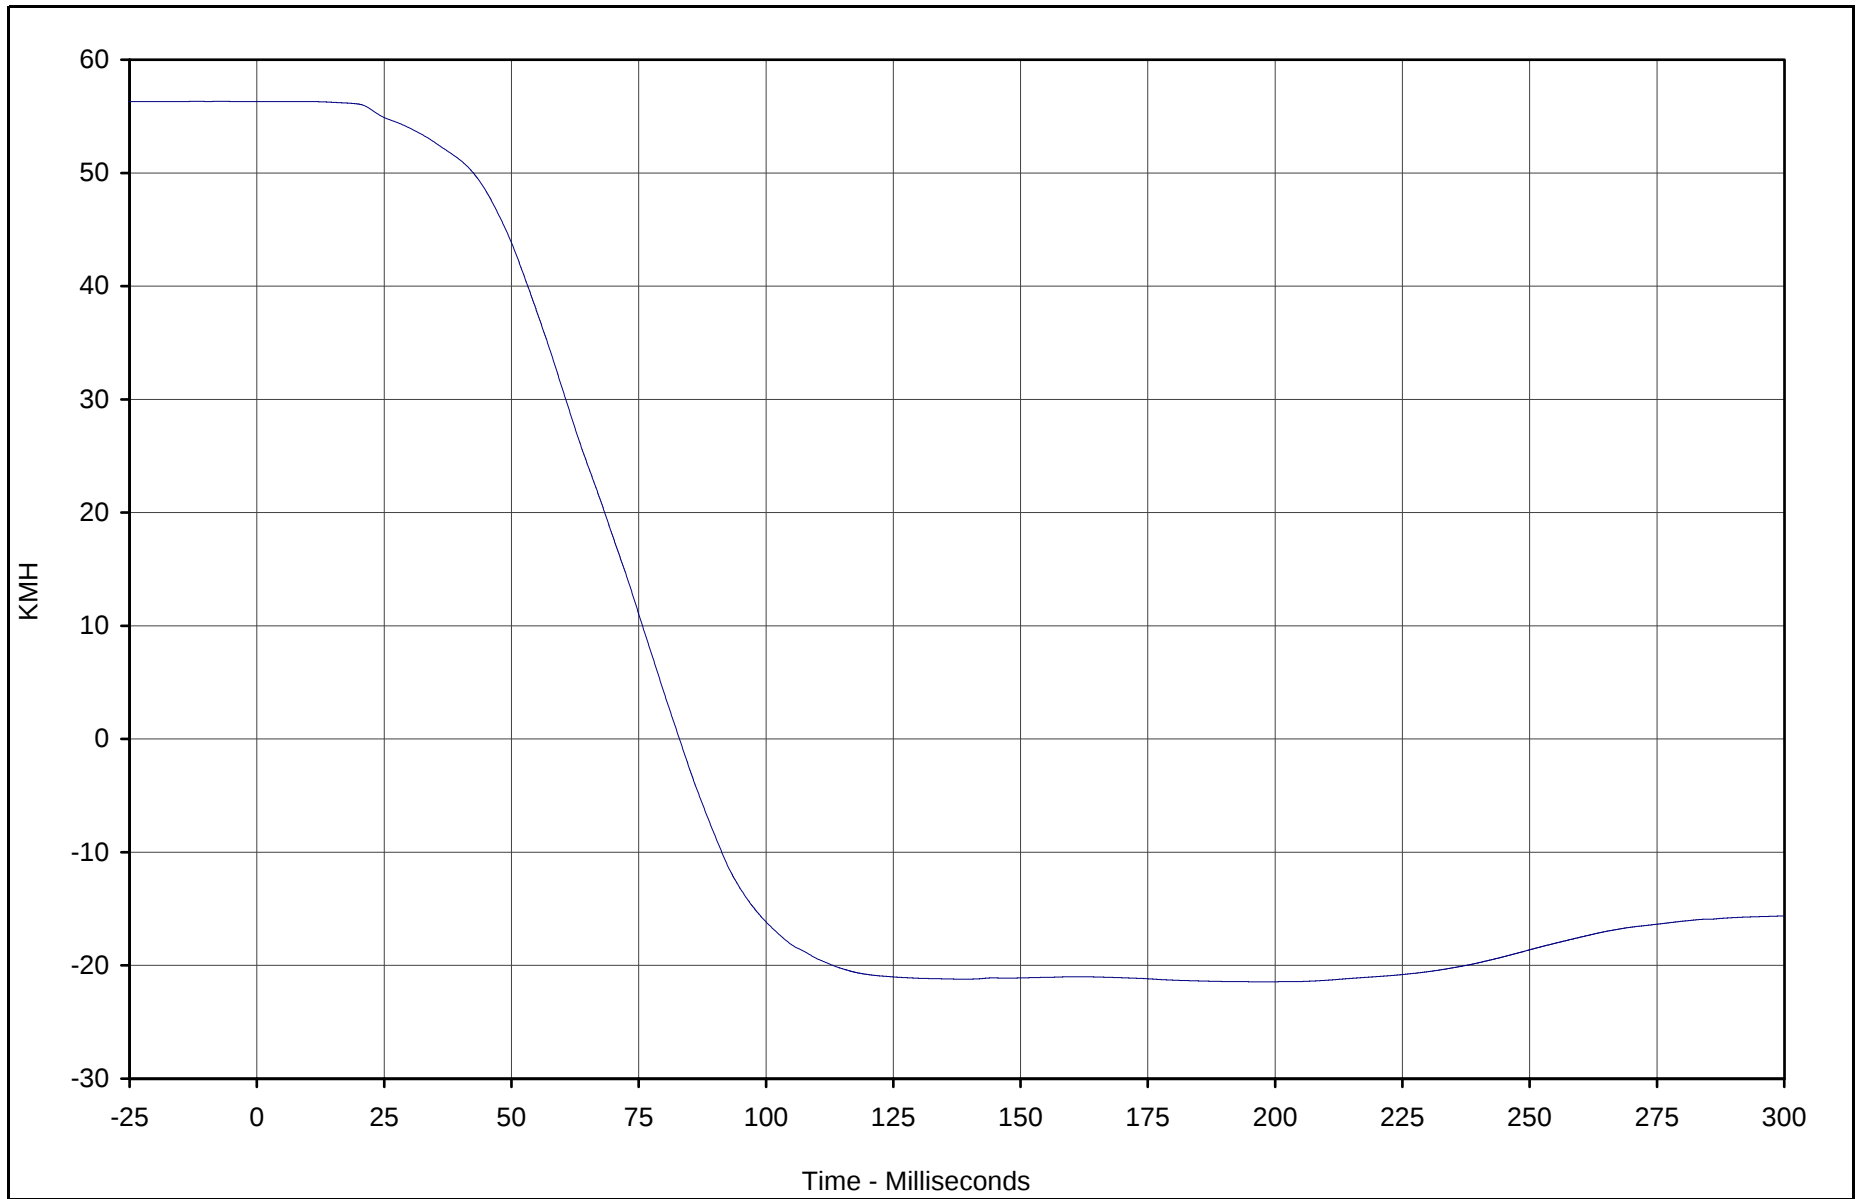

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Chest Redundant X Velocity	060	IN1	KMH	56.3	1.3	-21.4	196.7	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

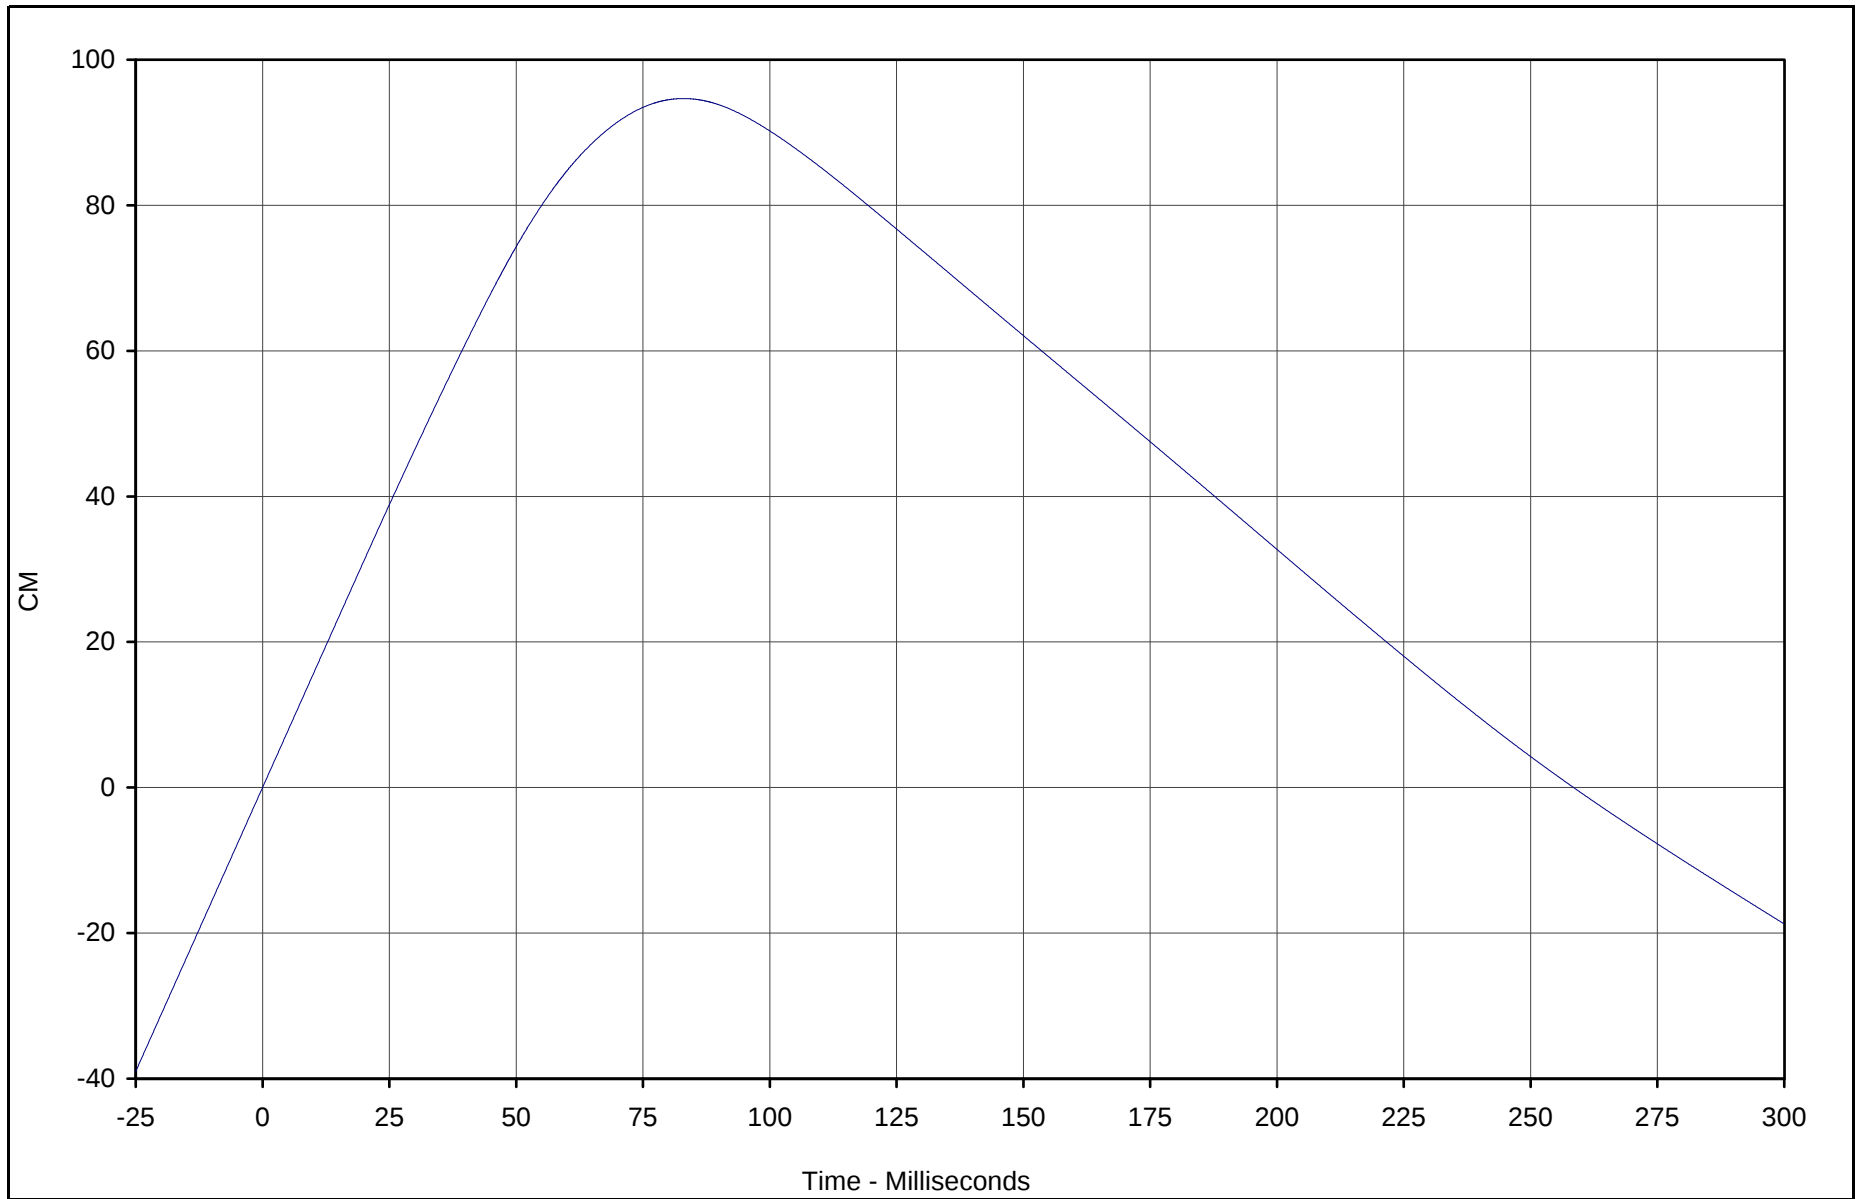

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Chest Redundant X Displ.	060	IN2	CM	94.7	83.0	-18.7	299.9	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

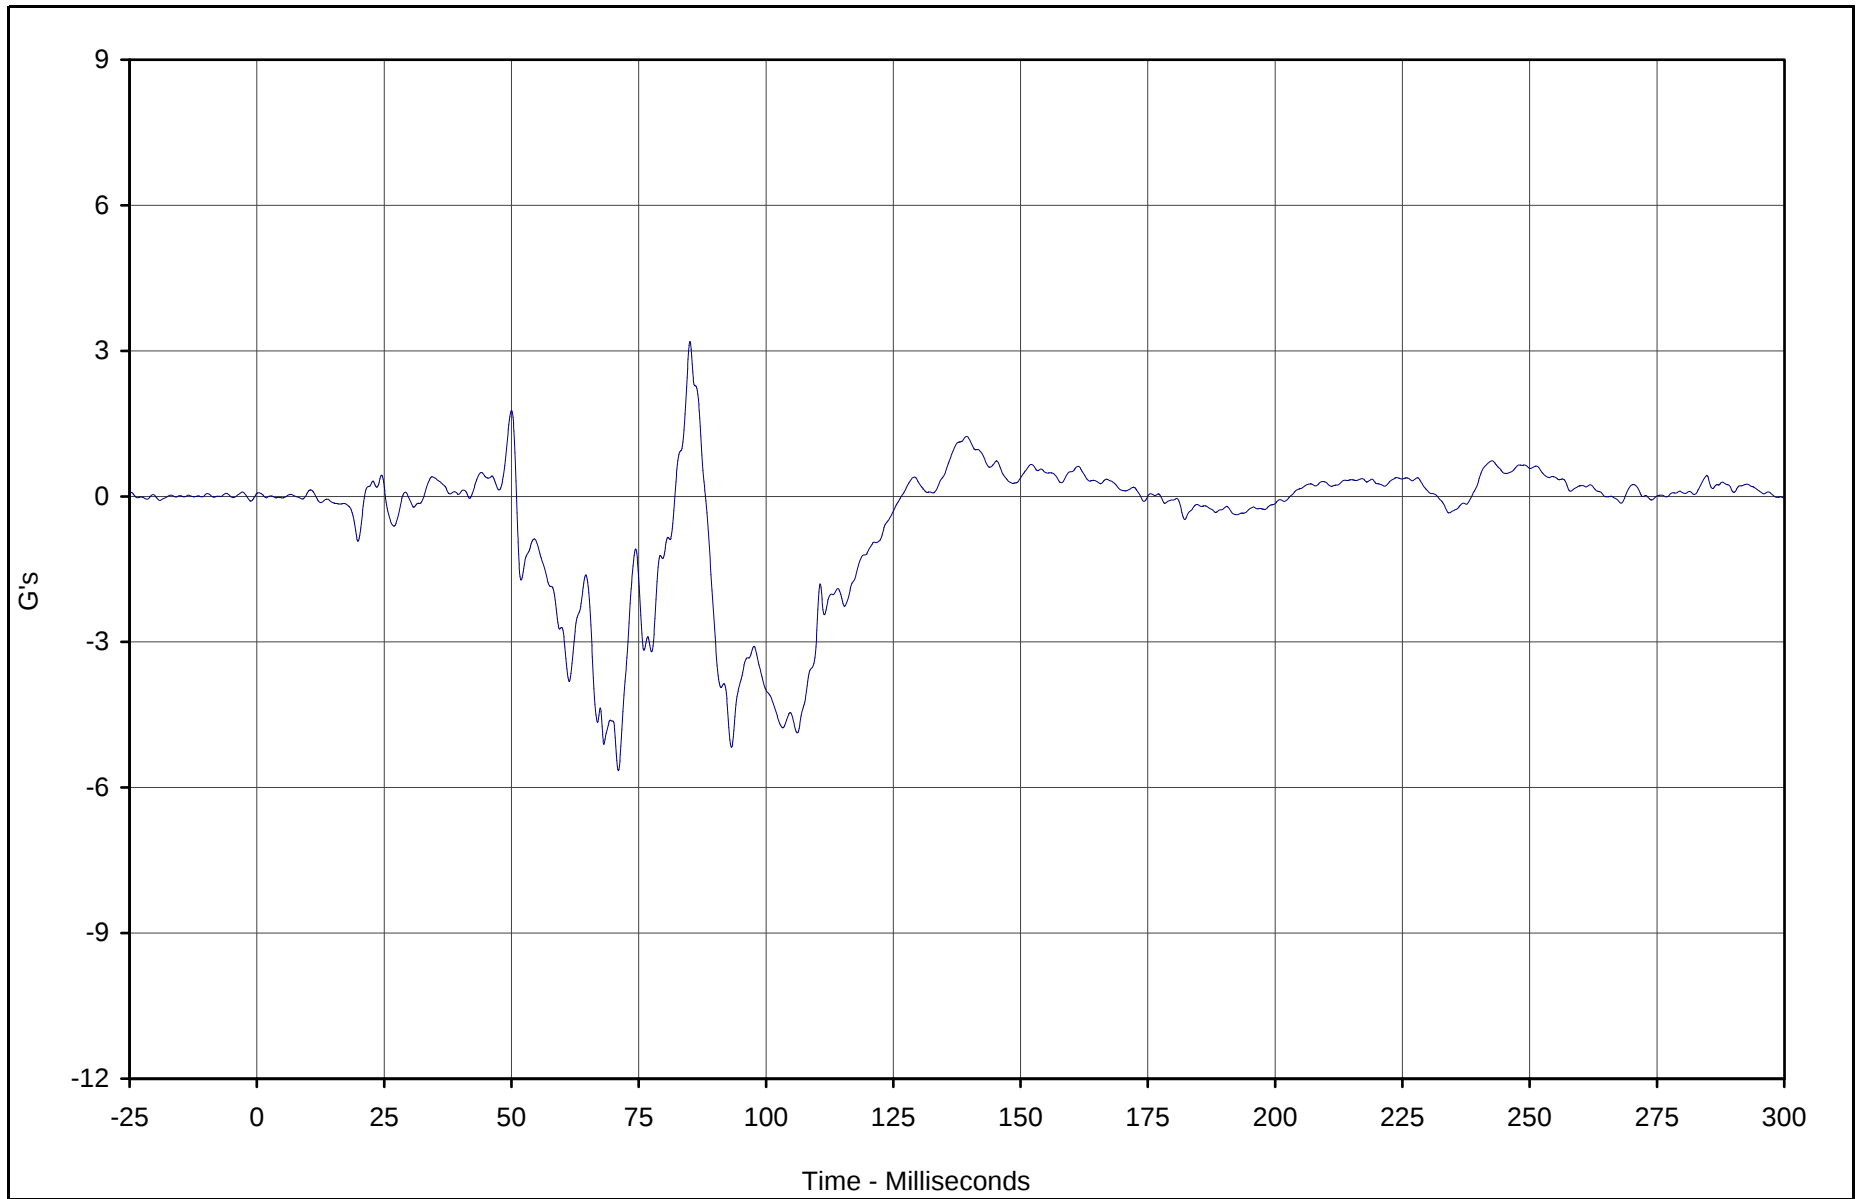

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Chest Redundant Y	061	FIL	G's	3.2	85.1	-5.7	71.0	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

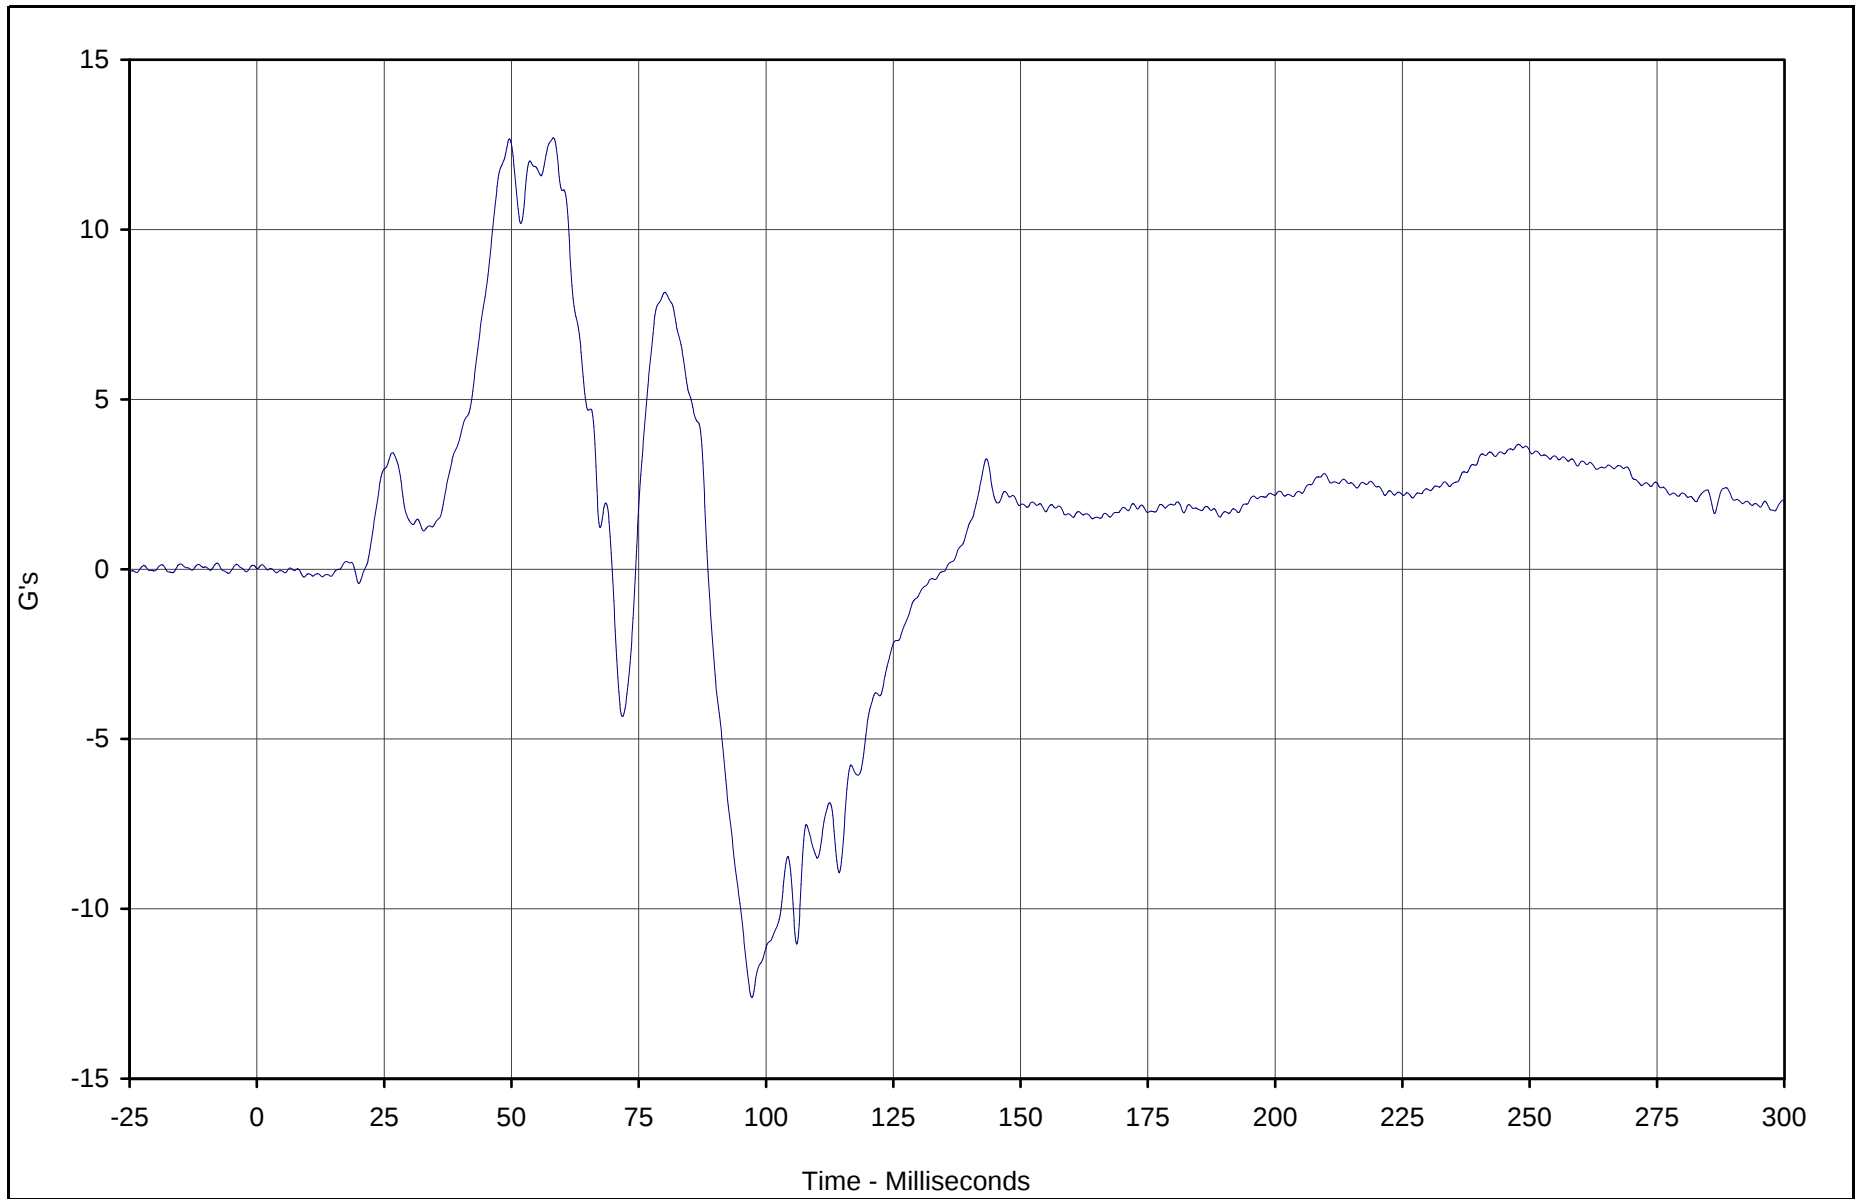

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Chest Redundant Z	062	FIL	G's	12.7	58.2	-12.6	97.2	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

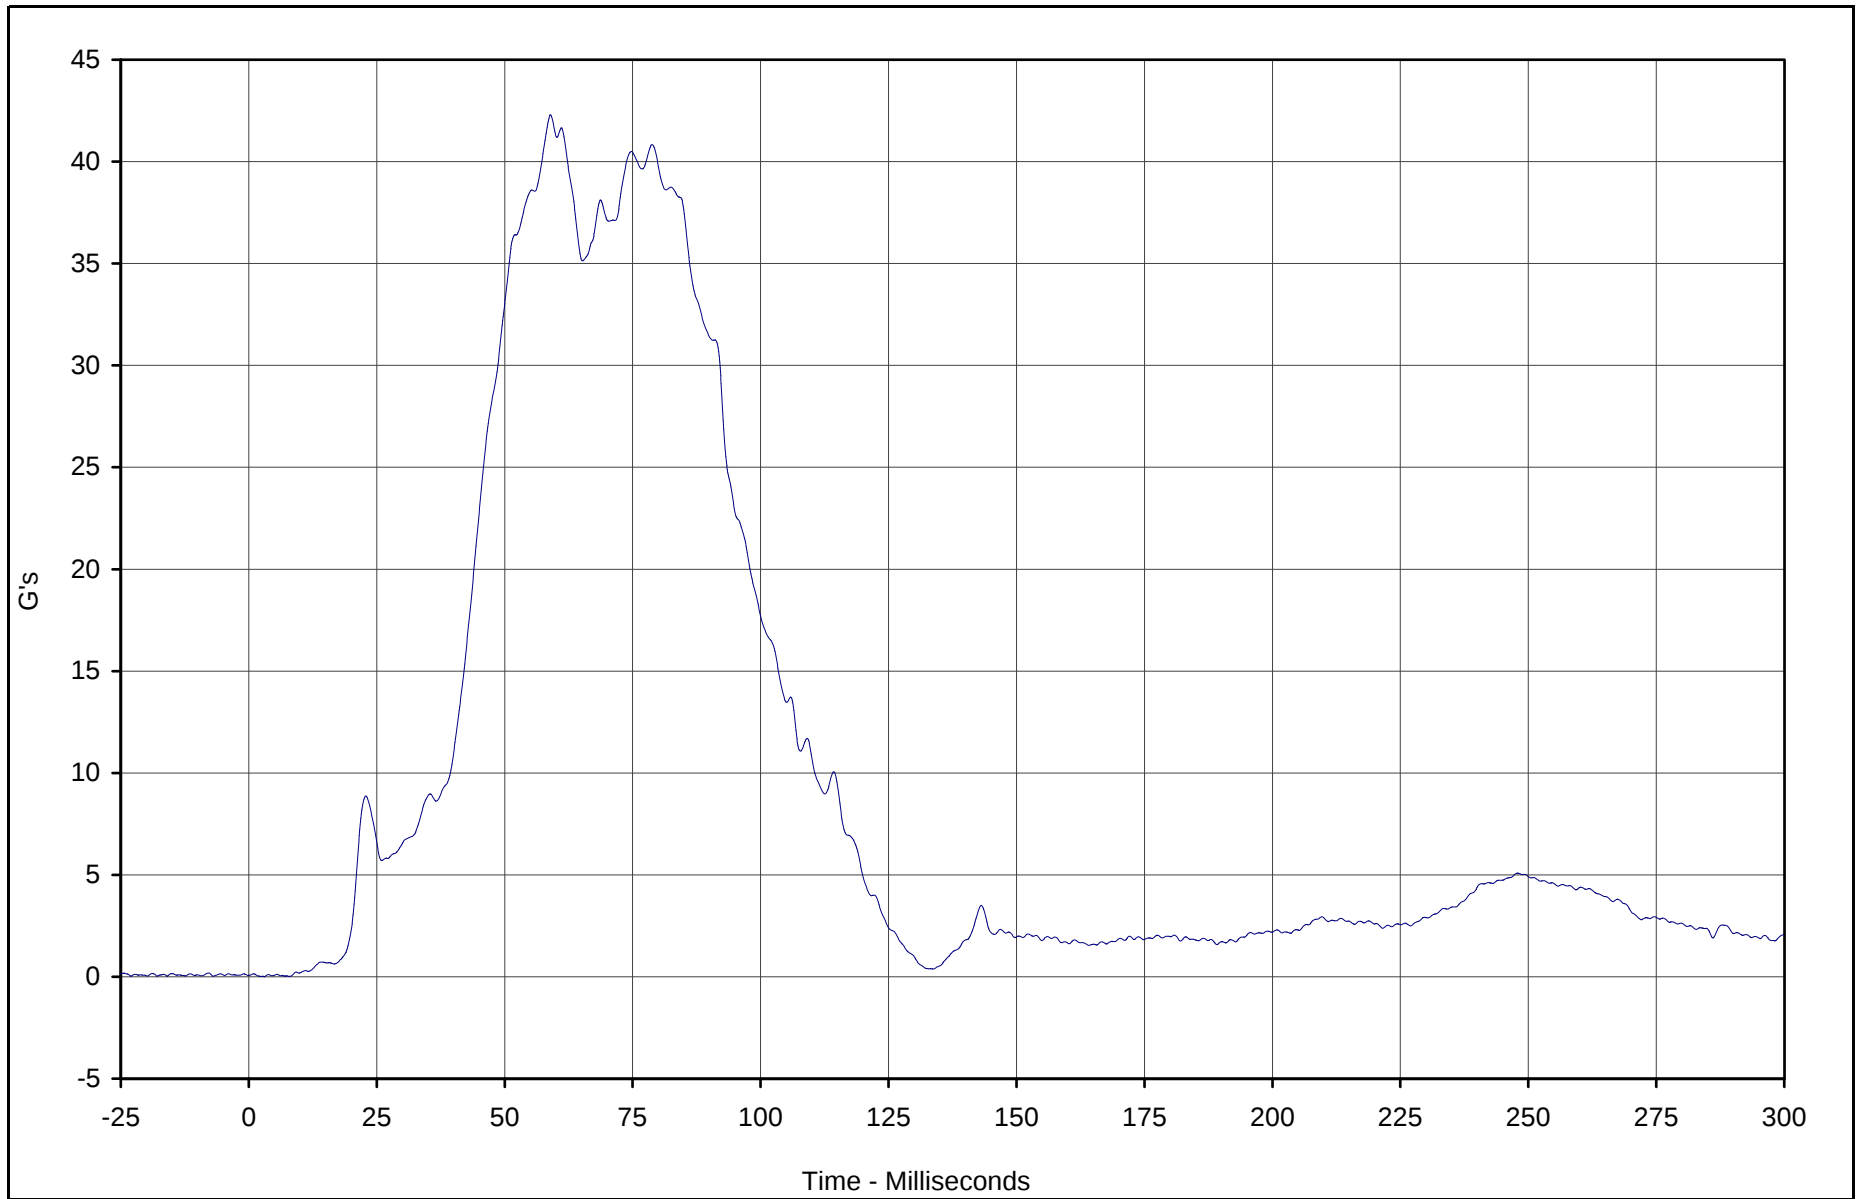

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Chest Resultant Redundant	060	RES	G's	42.3	59.0	0.0	3.1	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

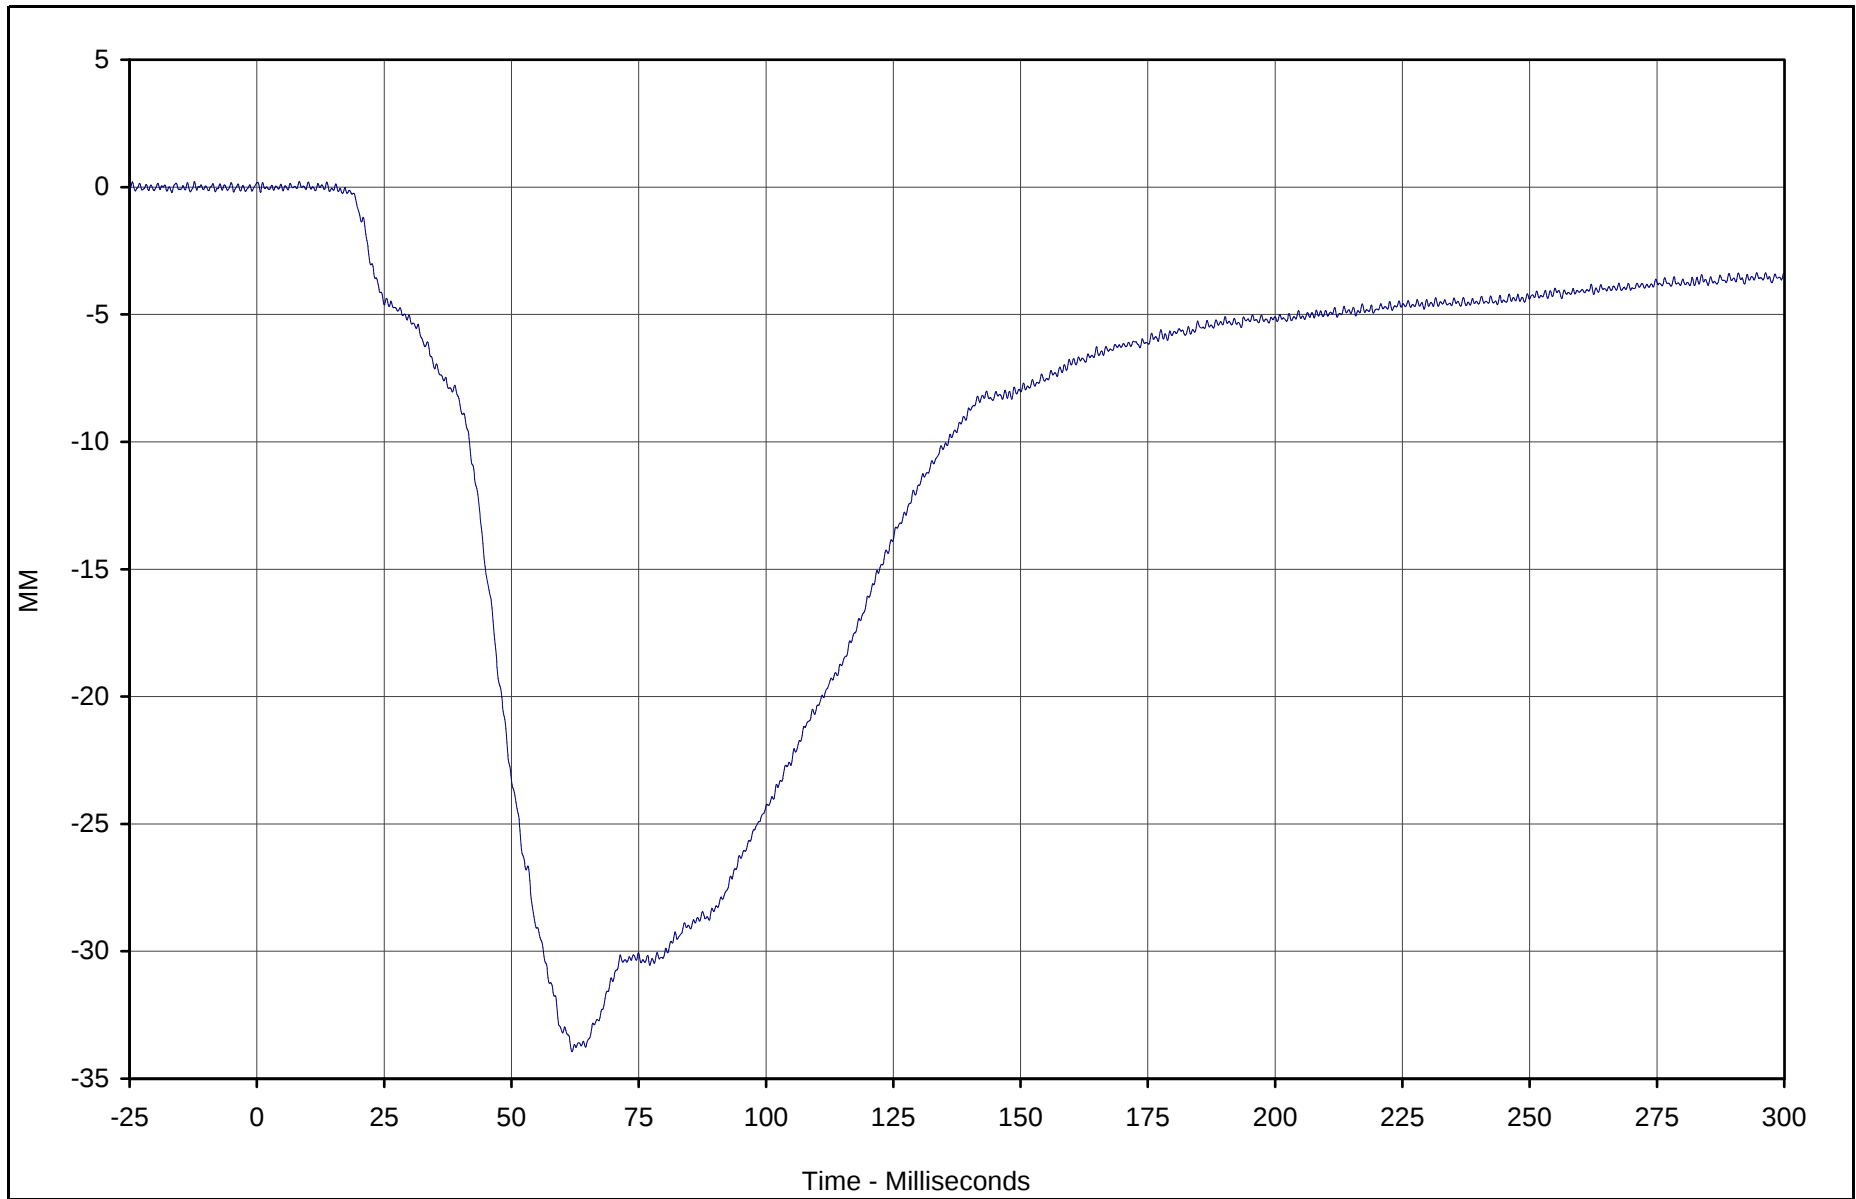

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Chest Displacement X	063	FIL	MM	0.2	8.3	-33.9	61.9	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

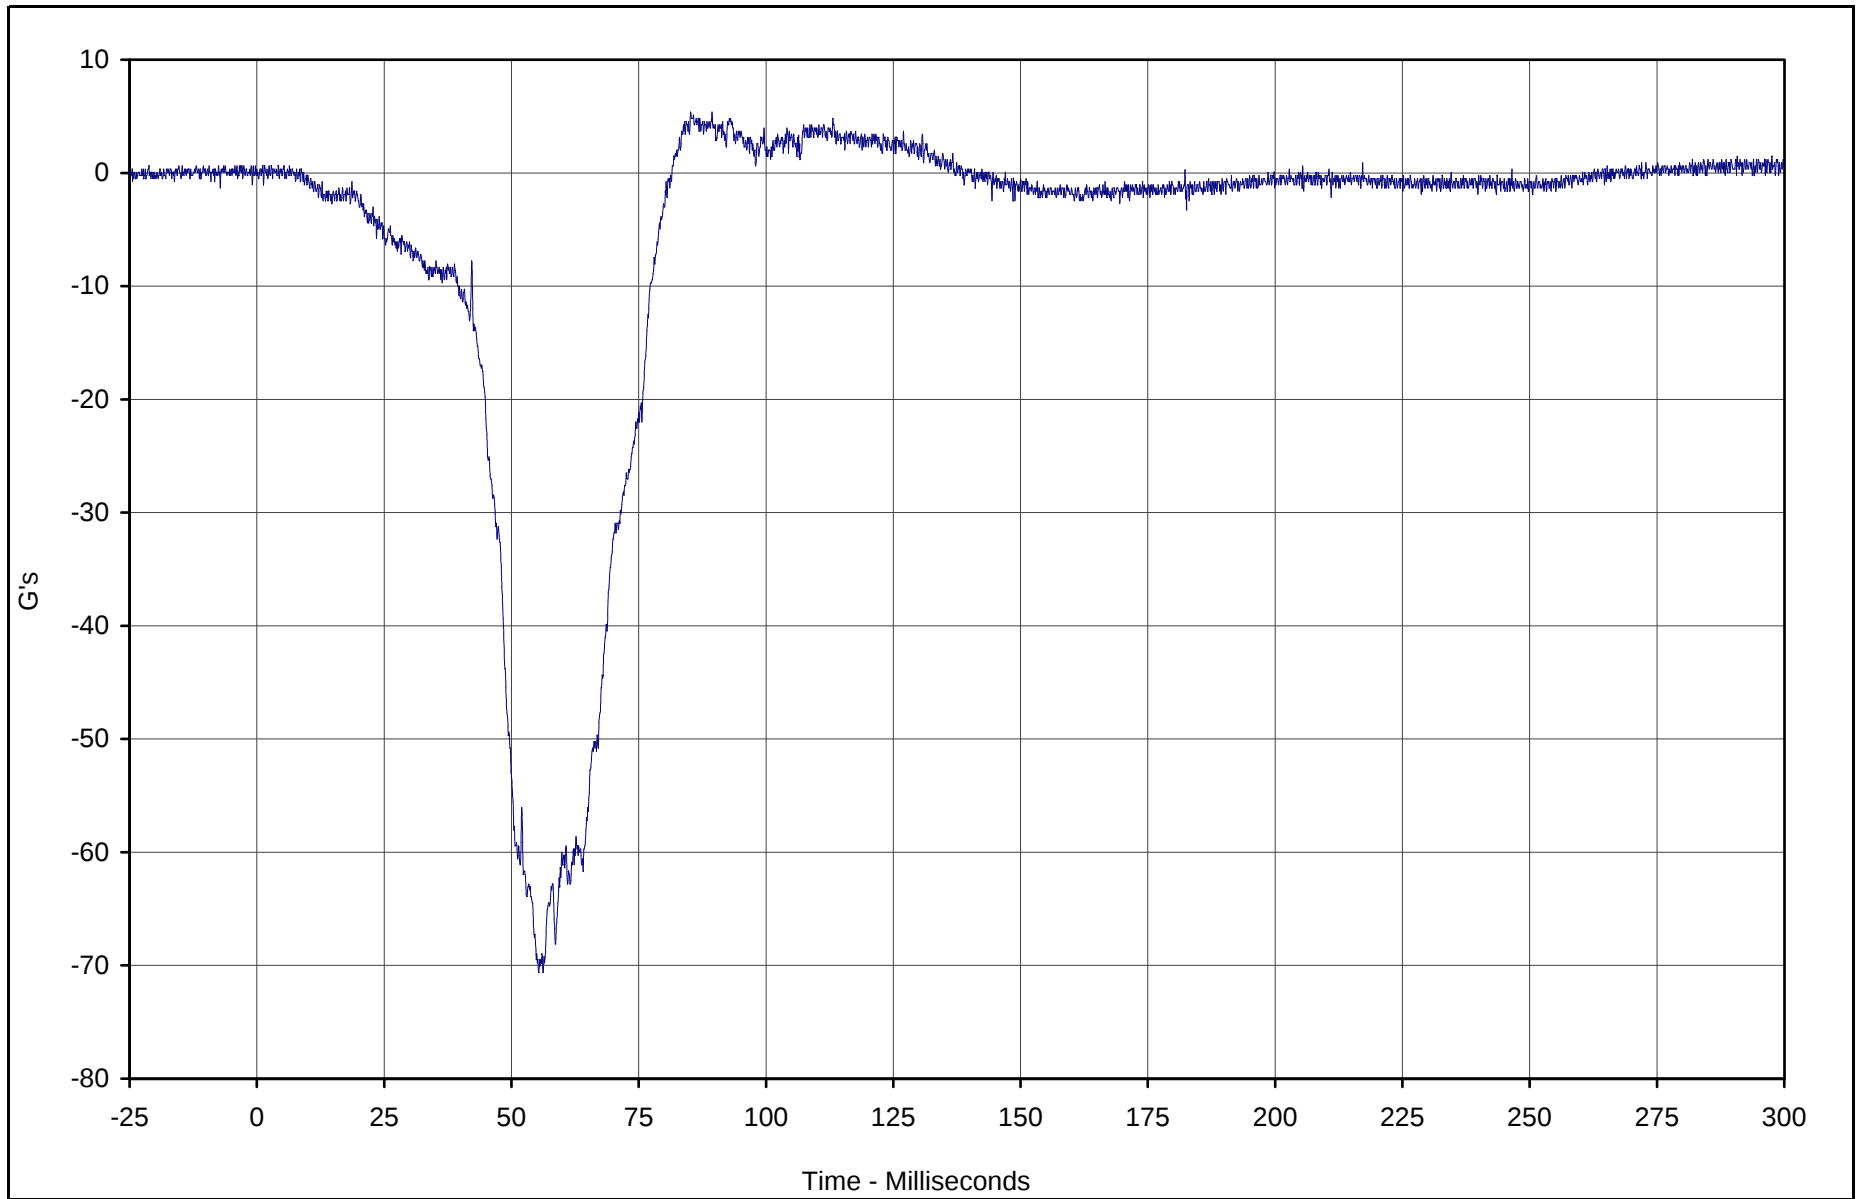

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Pelvis X	064	FIL	G's	5.4	85.2	-70.6	55.3	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

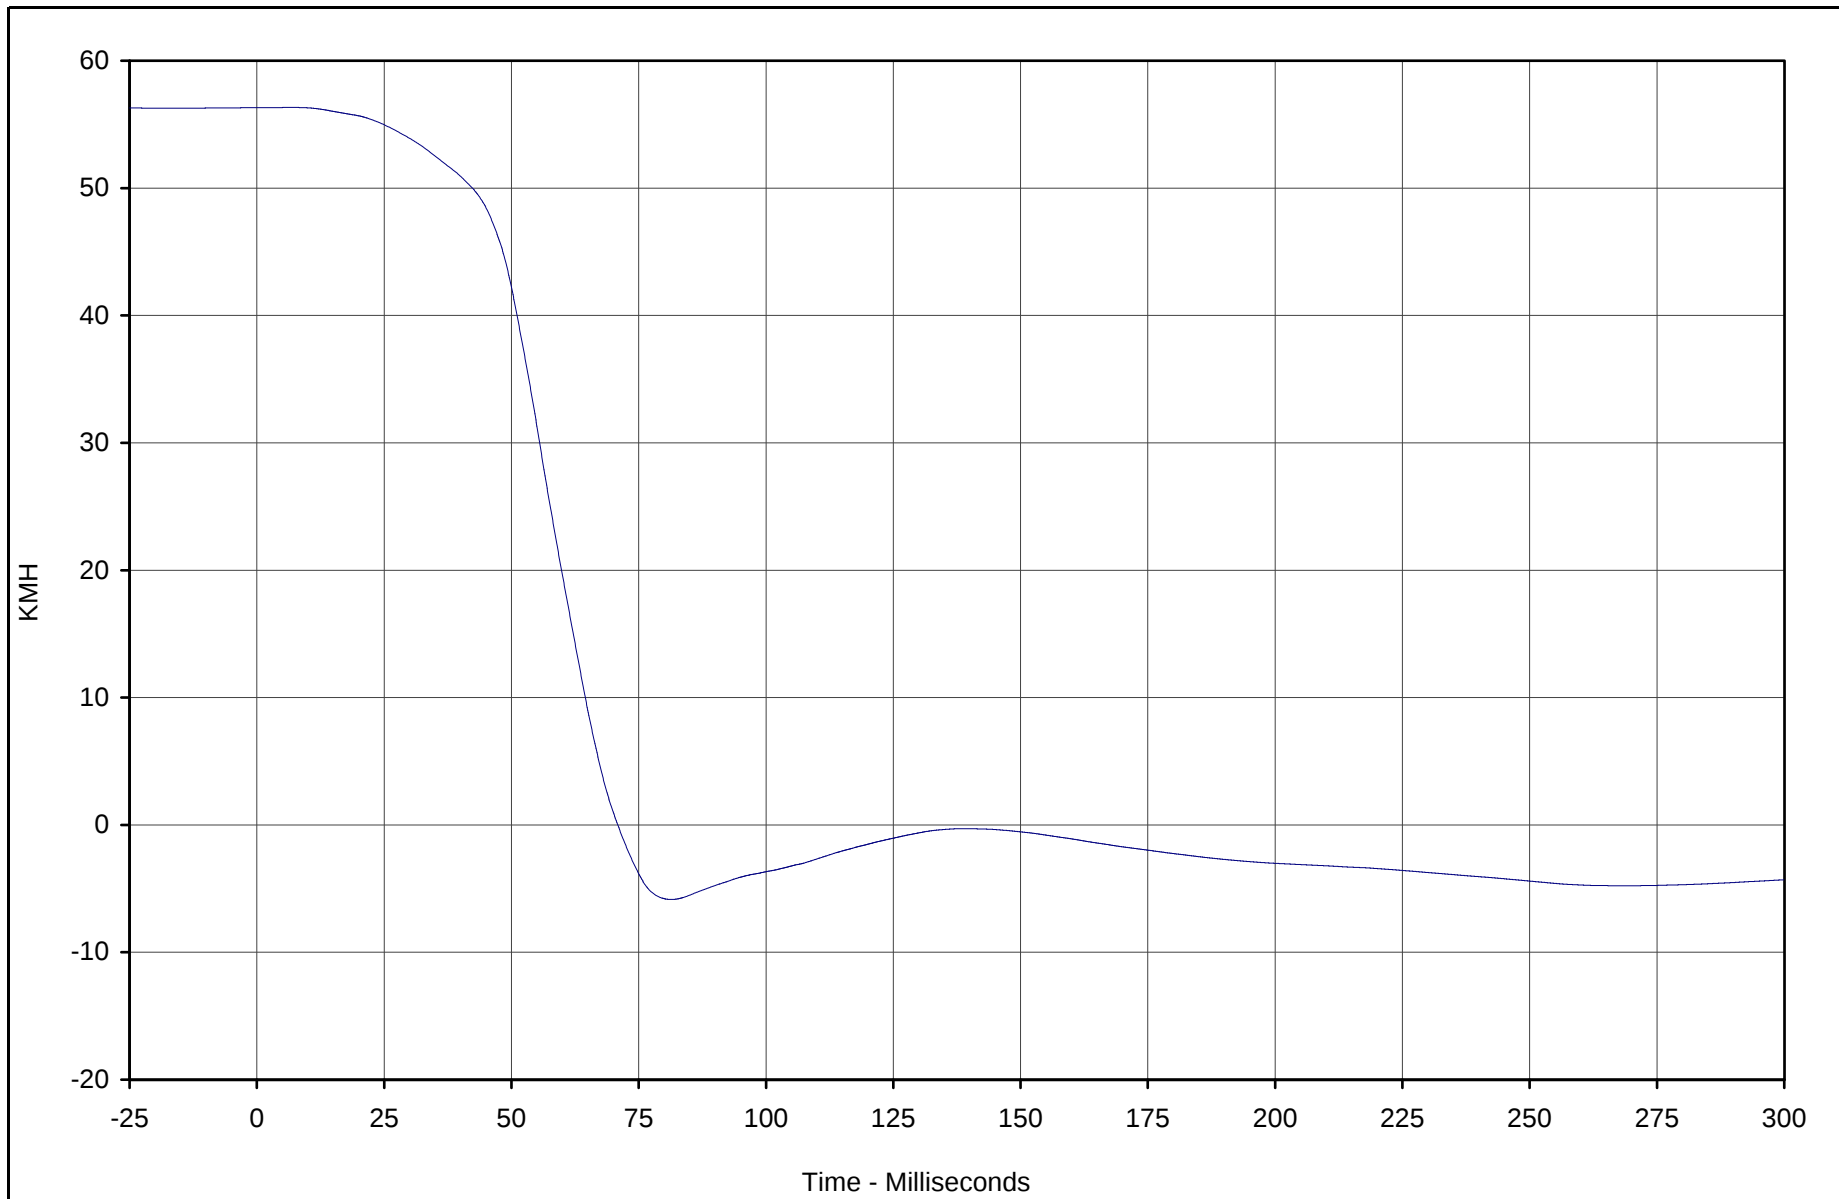

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Pelvis X Velocity	064	IN1	KMH	56.3	7.0	-5.9	81.4	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

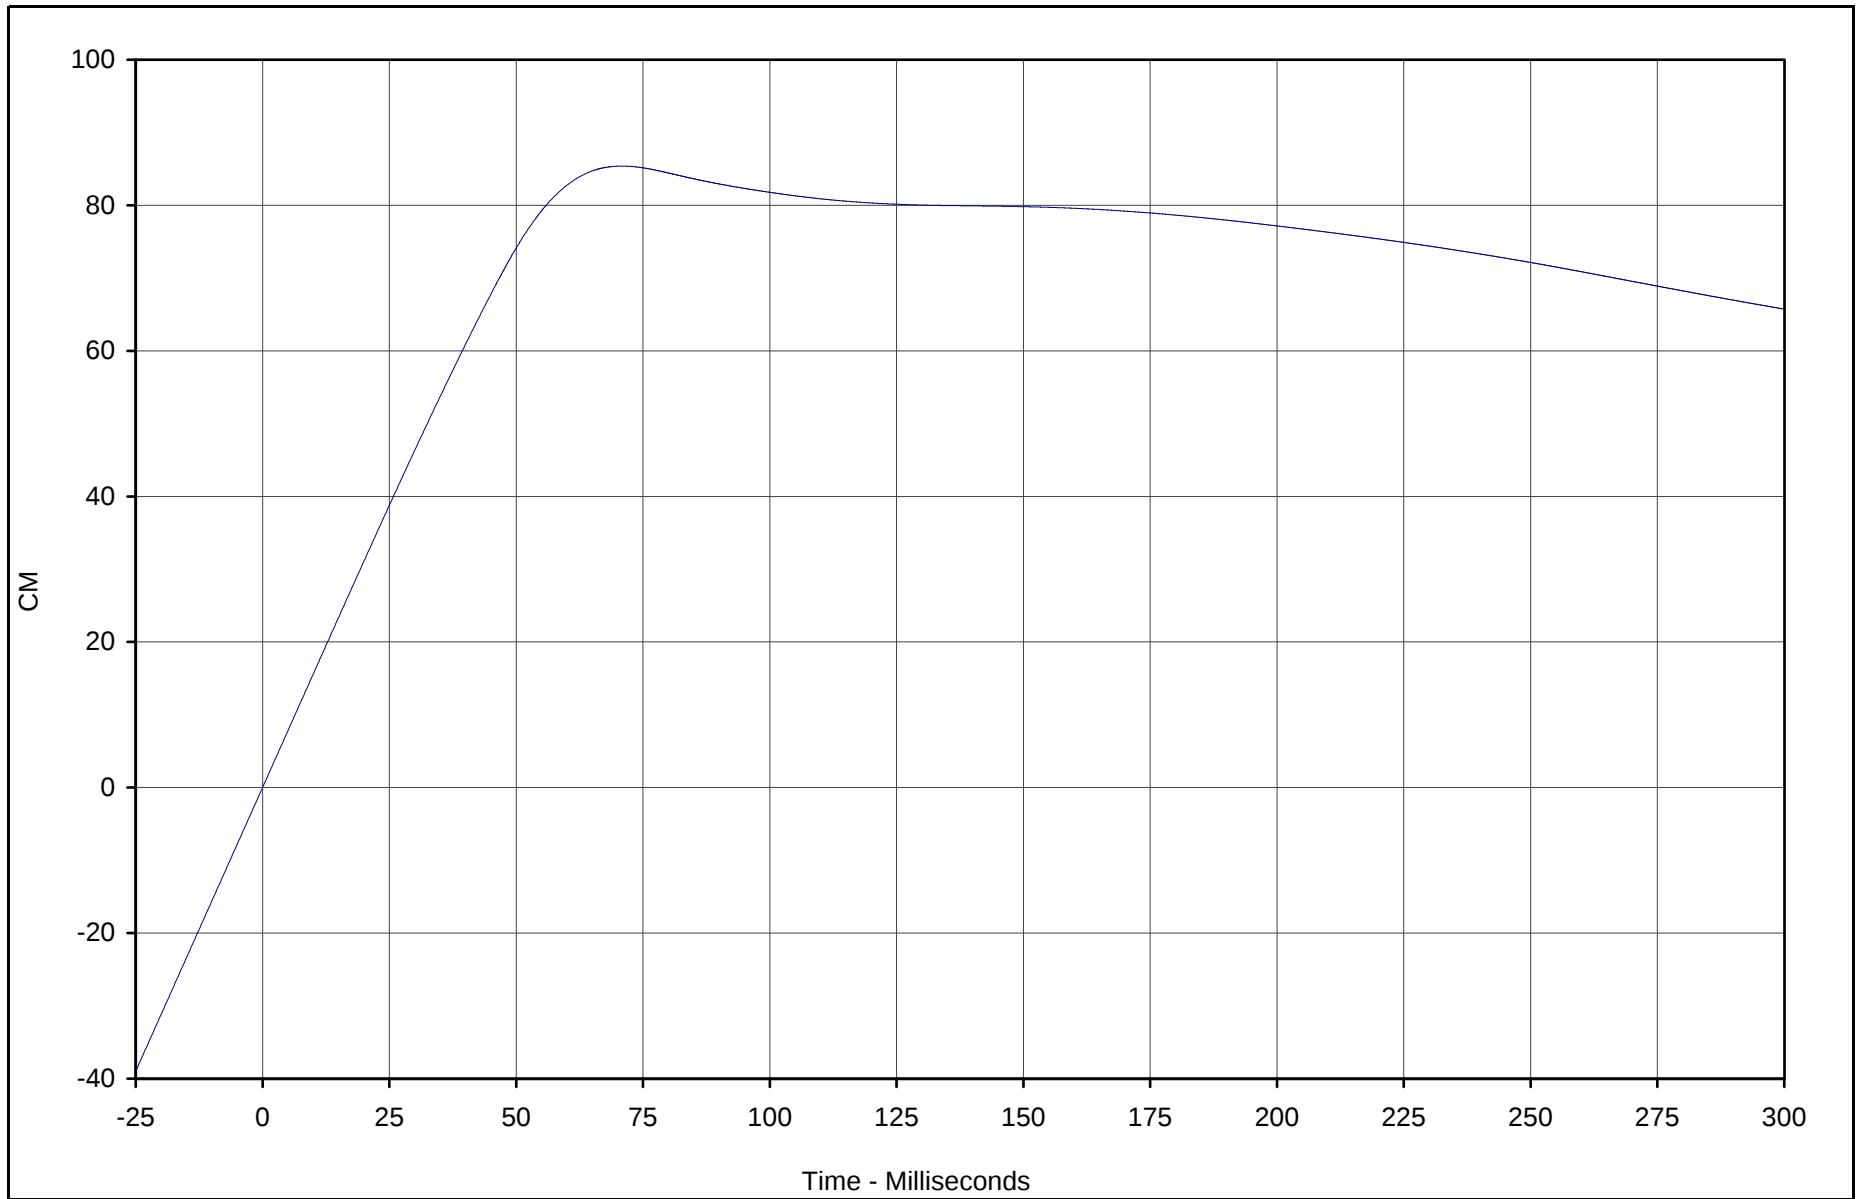

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Pelvis X Displ.	064	IN2	CM	85.4	70.9	0.0	0.0	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

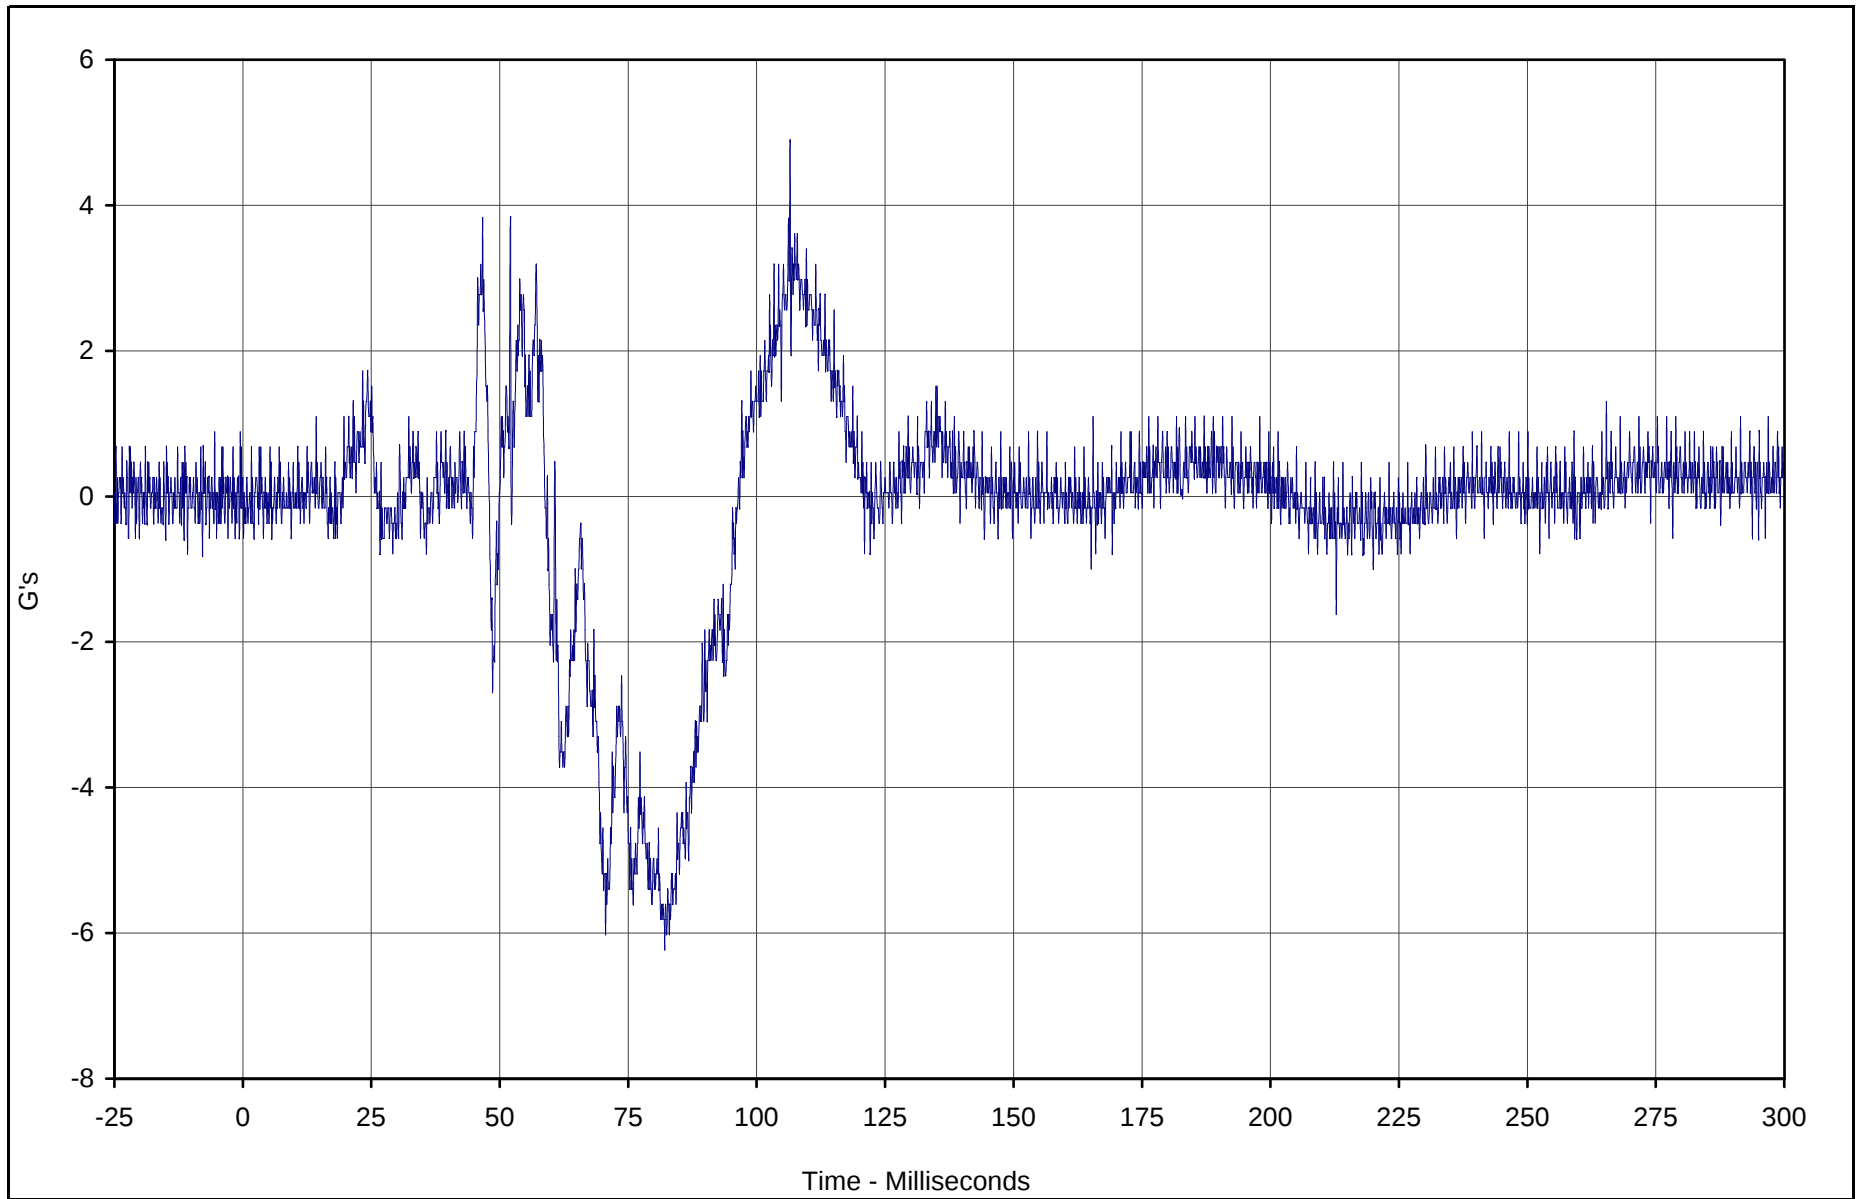

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Pelvis Y	065	FIL	G's	4.9	106.5	-6.2	82.1	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

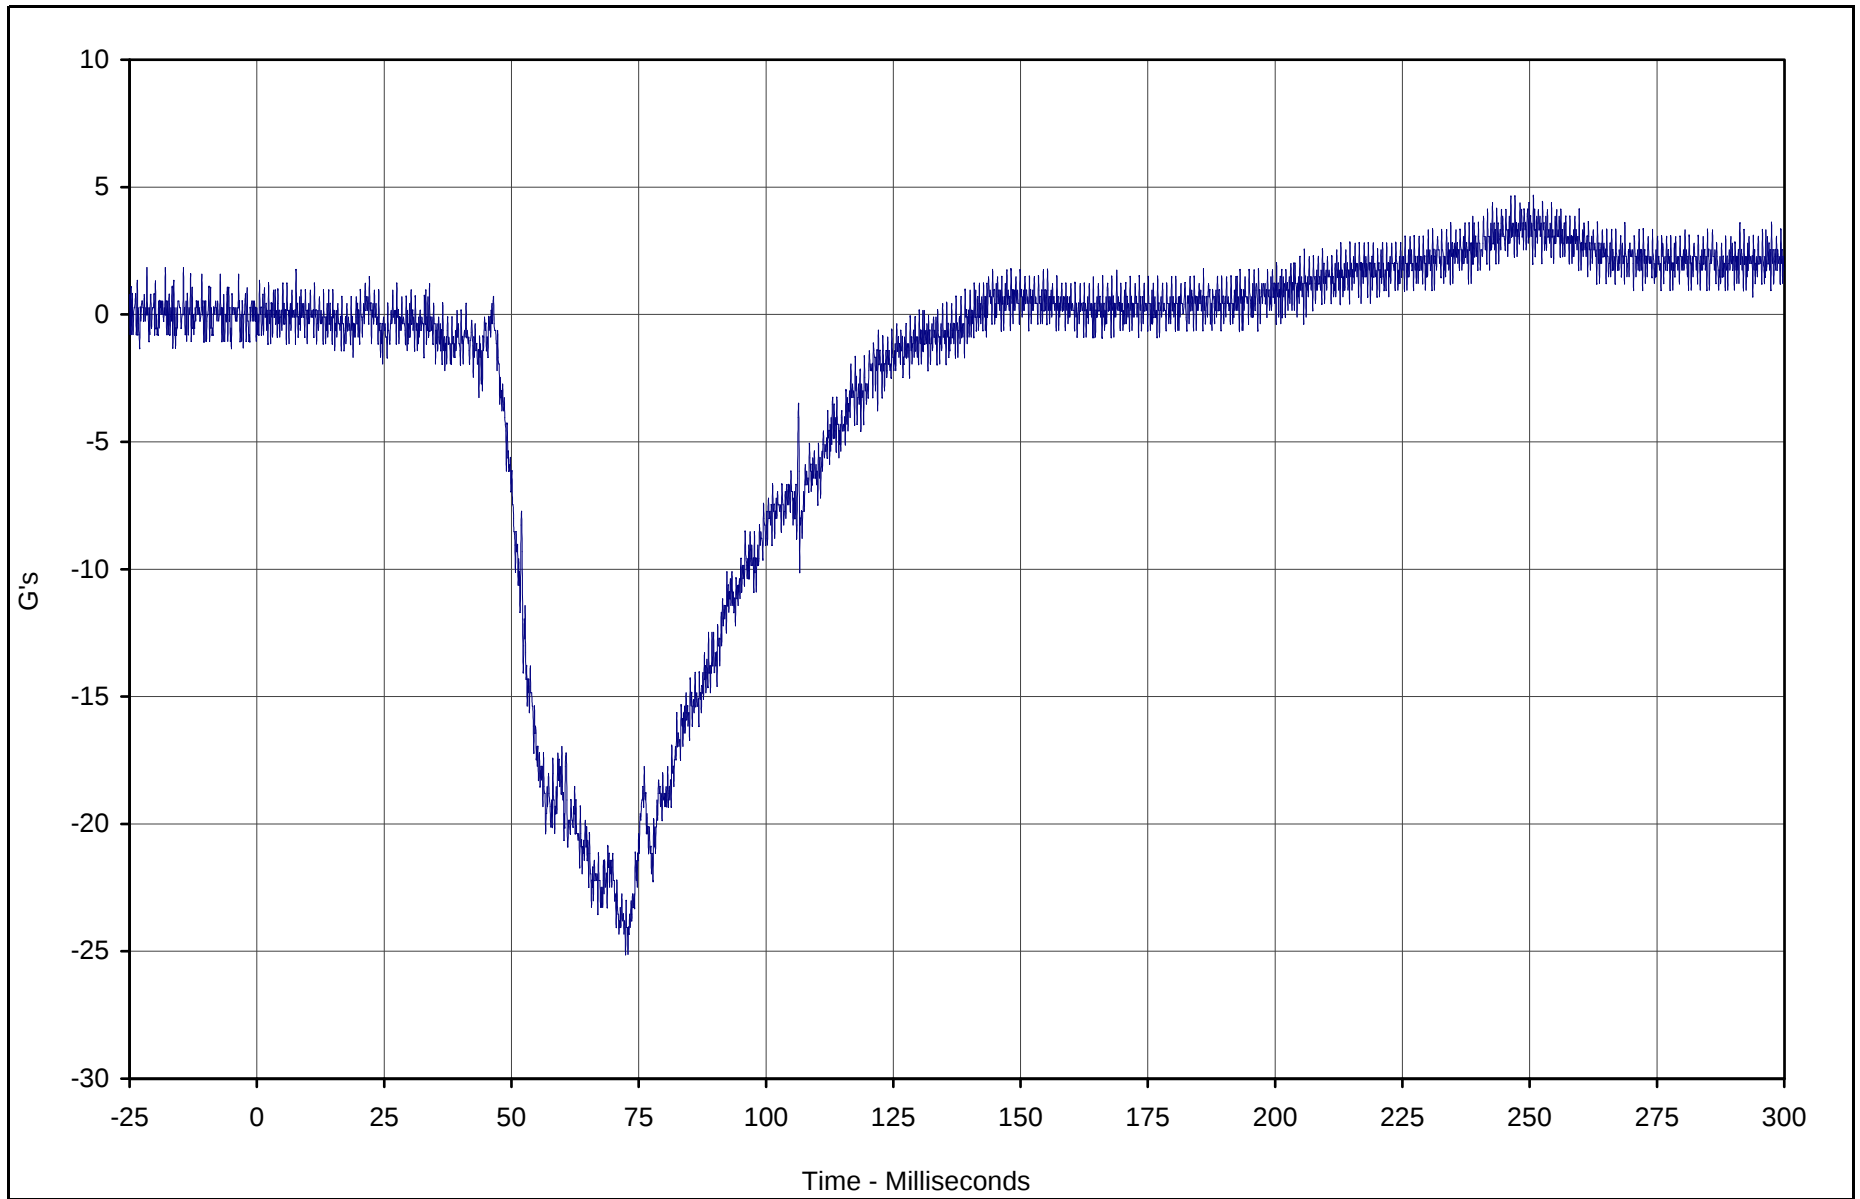

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Pelvis Z	066	FIL	G's	4.6	246.3	-25.1	72.4	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

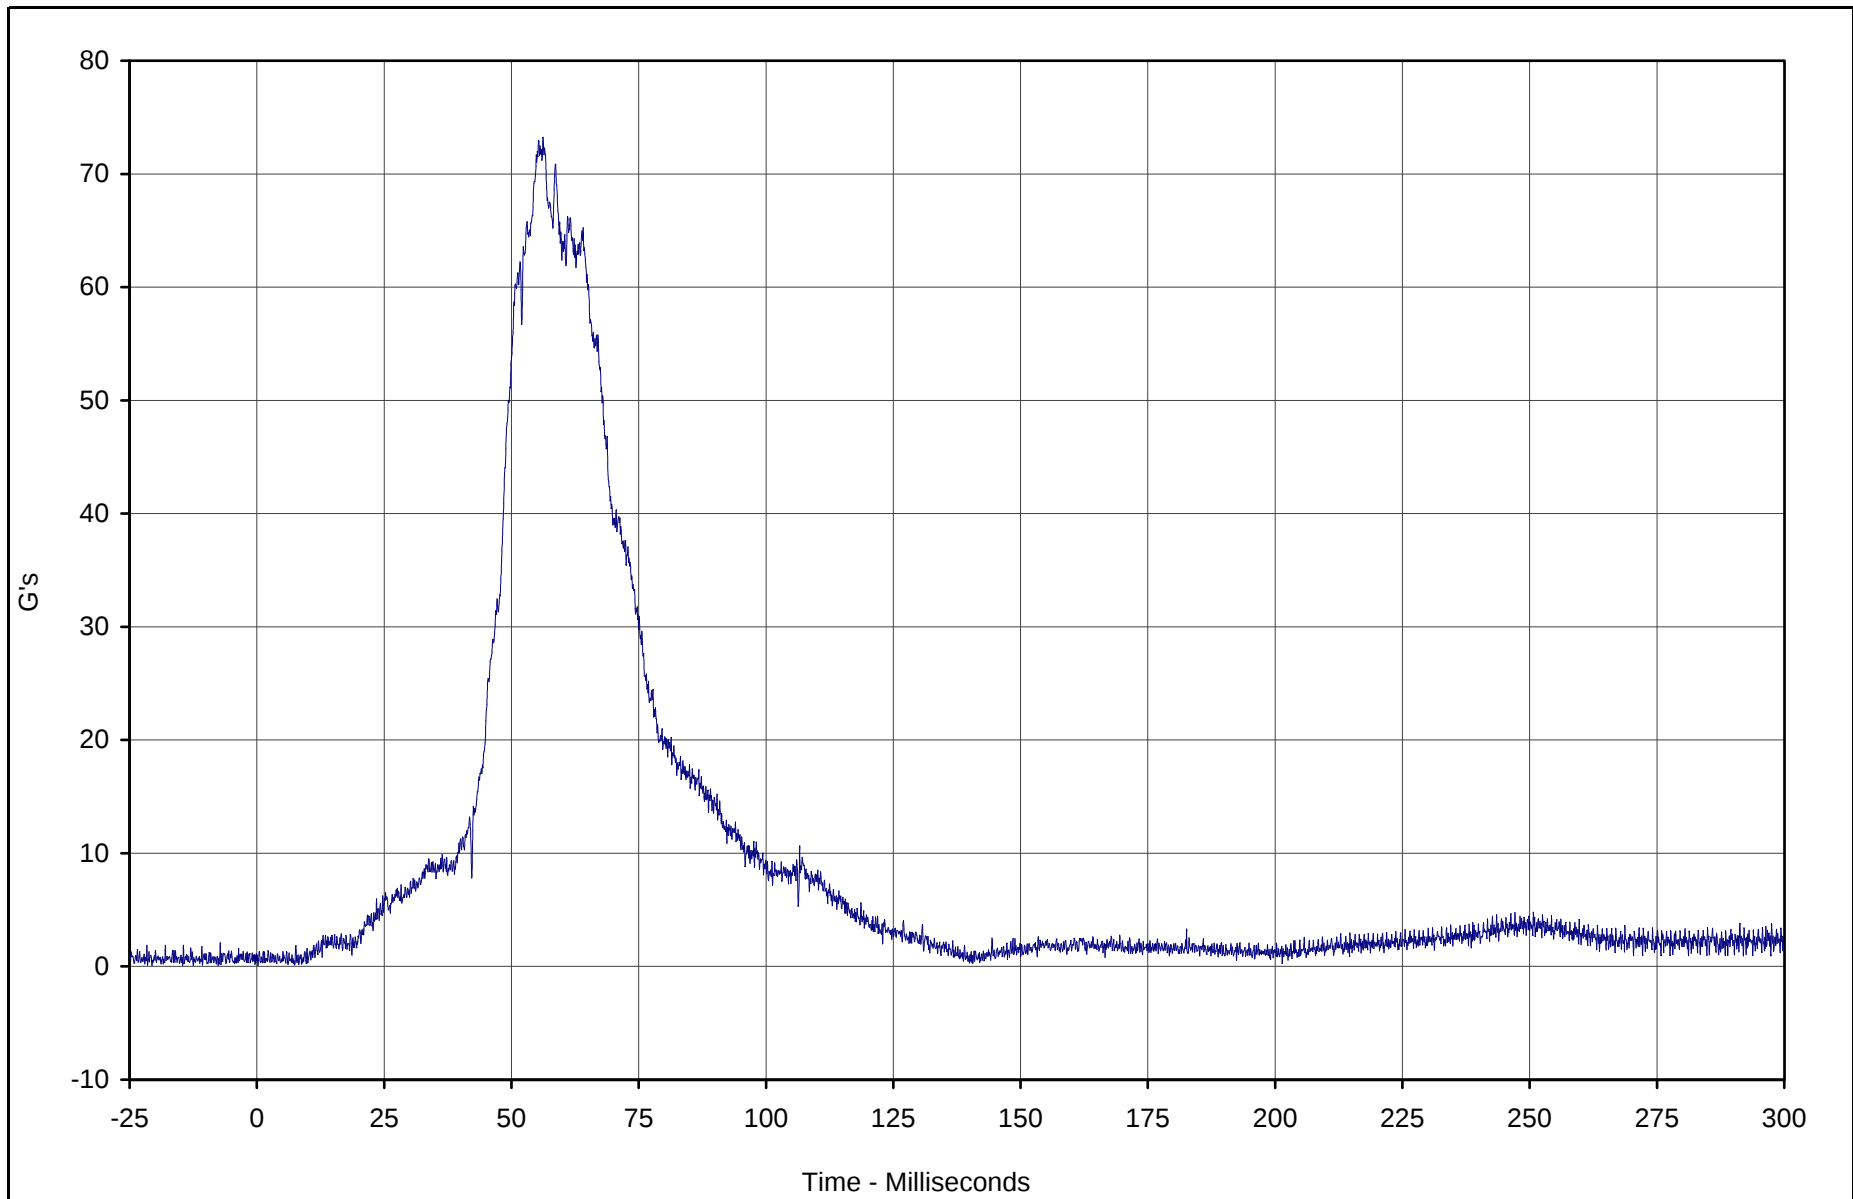

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Pelvis Resultant	066	RES	G's	73.2	56.2	0.1	0.2	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

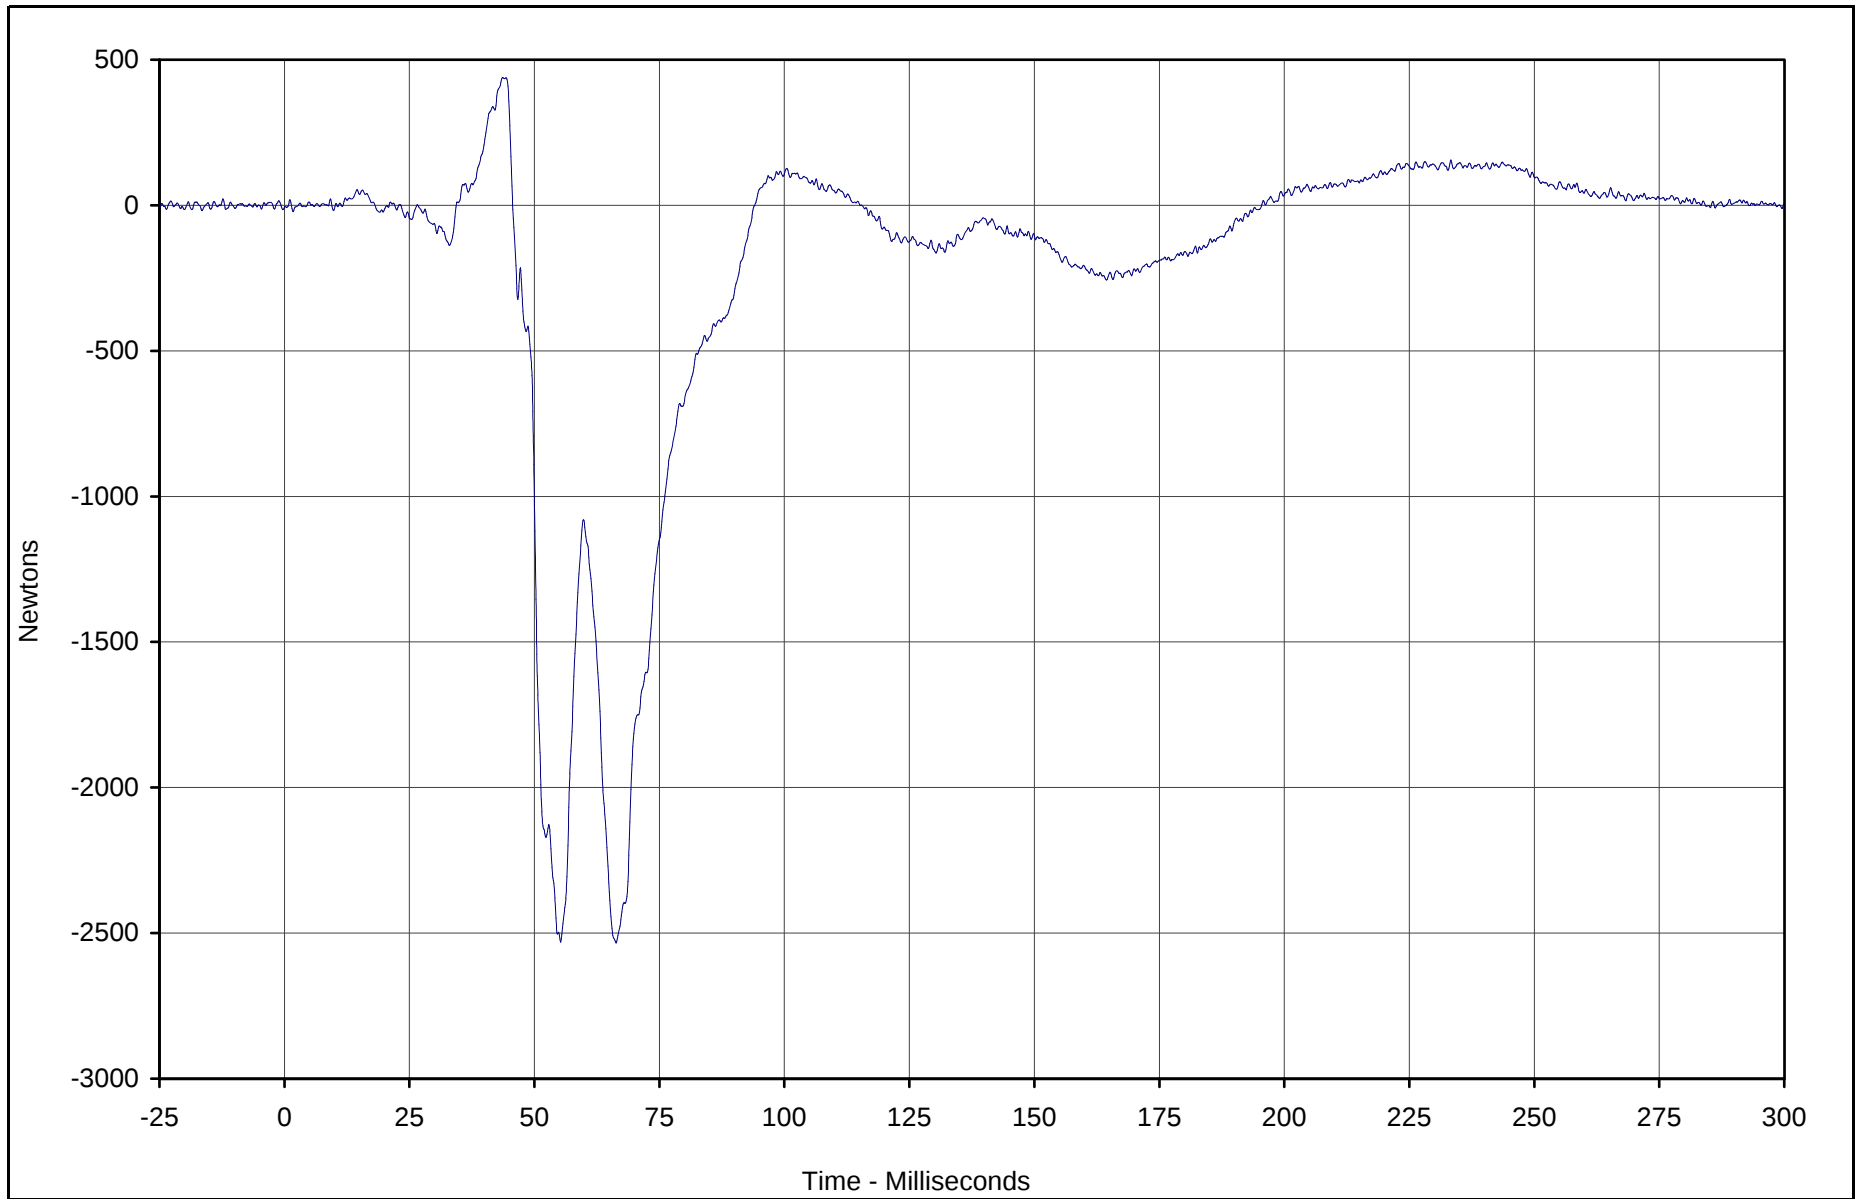

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Left Femur Force	067	FIL	Newtons	438.4	43.6	-2533.3	66.3	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

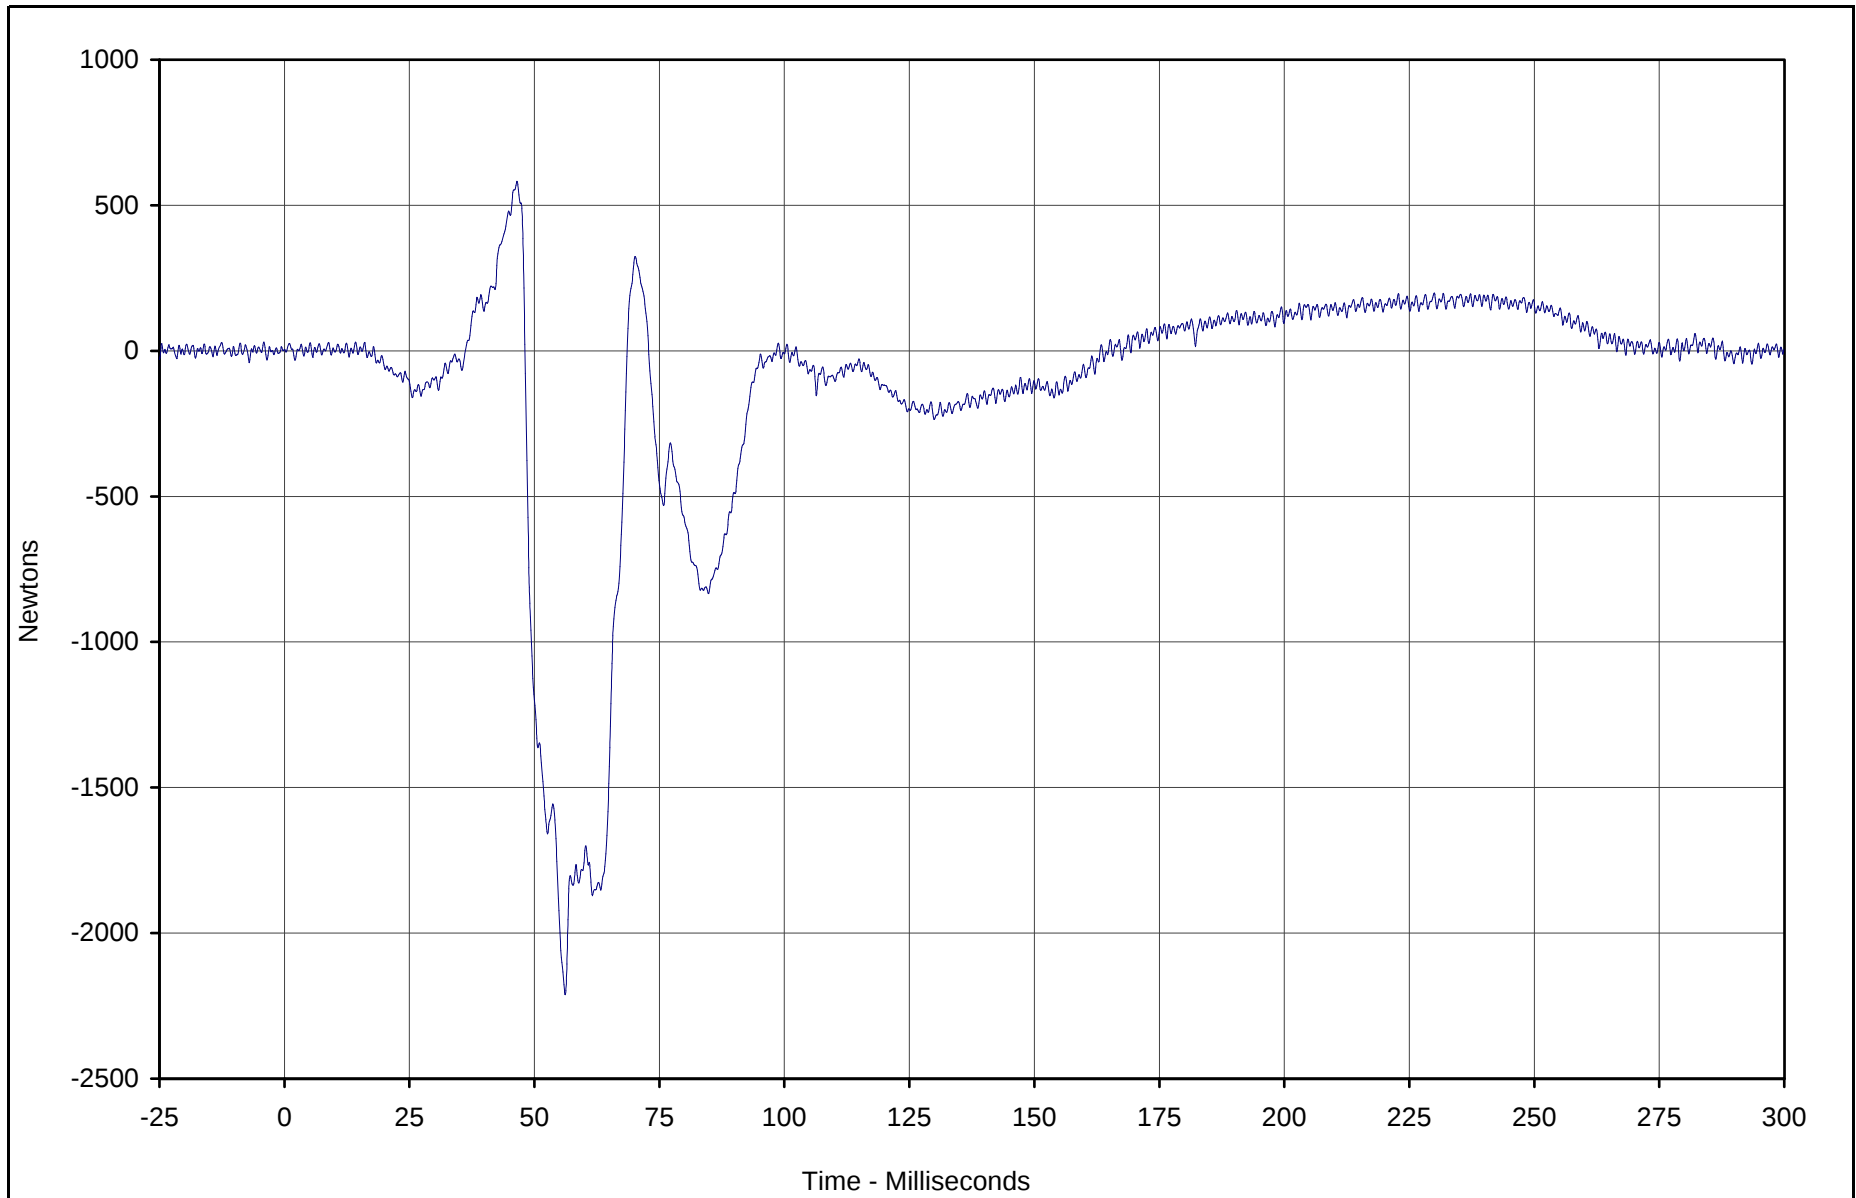

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Right Femur Force	068	FIL	Newtons	582.7	46.5	-2211.7	56.2	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

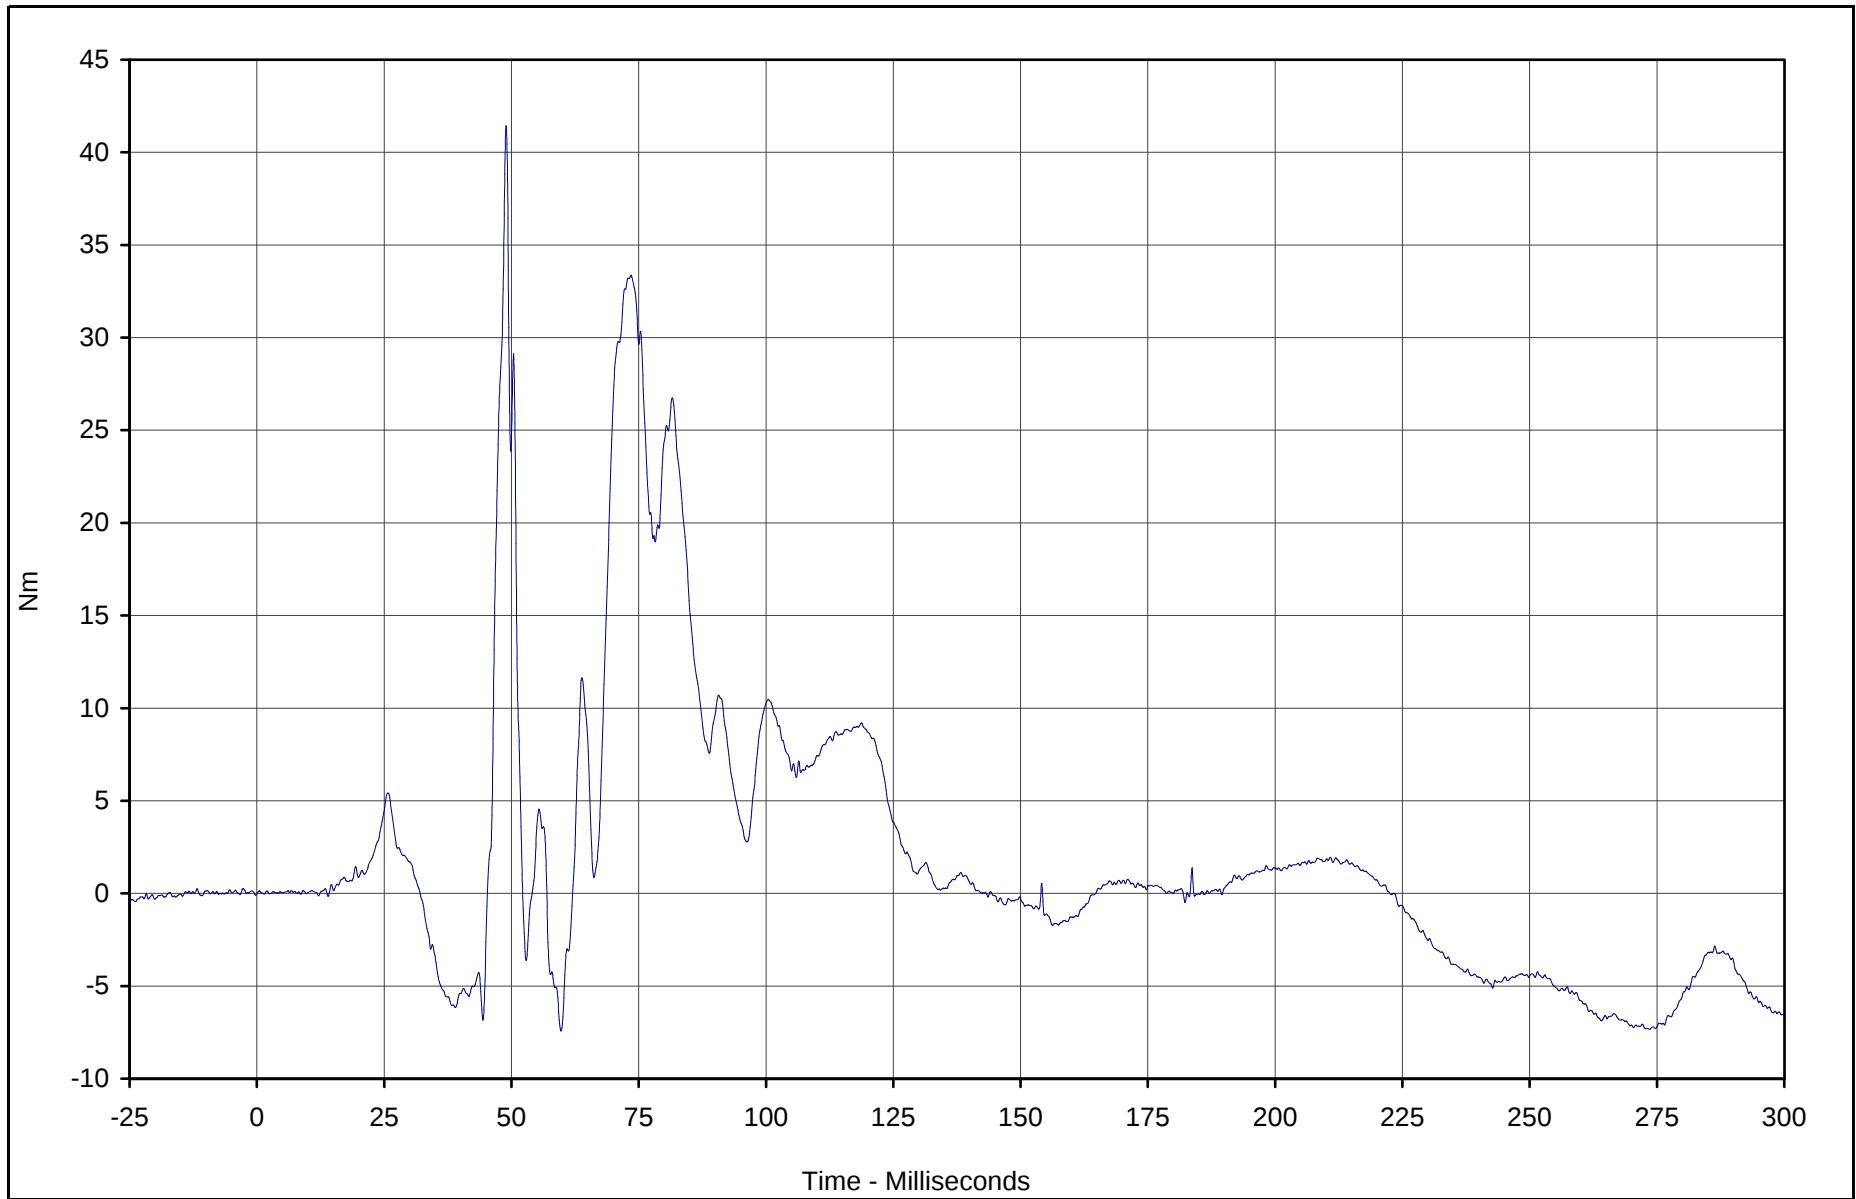

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Left Upper Tibia Moment X	069	FIL	Nm	41.4	48.9	-7.4	59.7	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

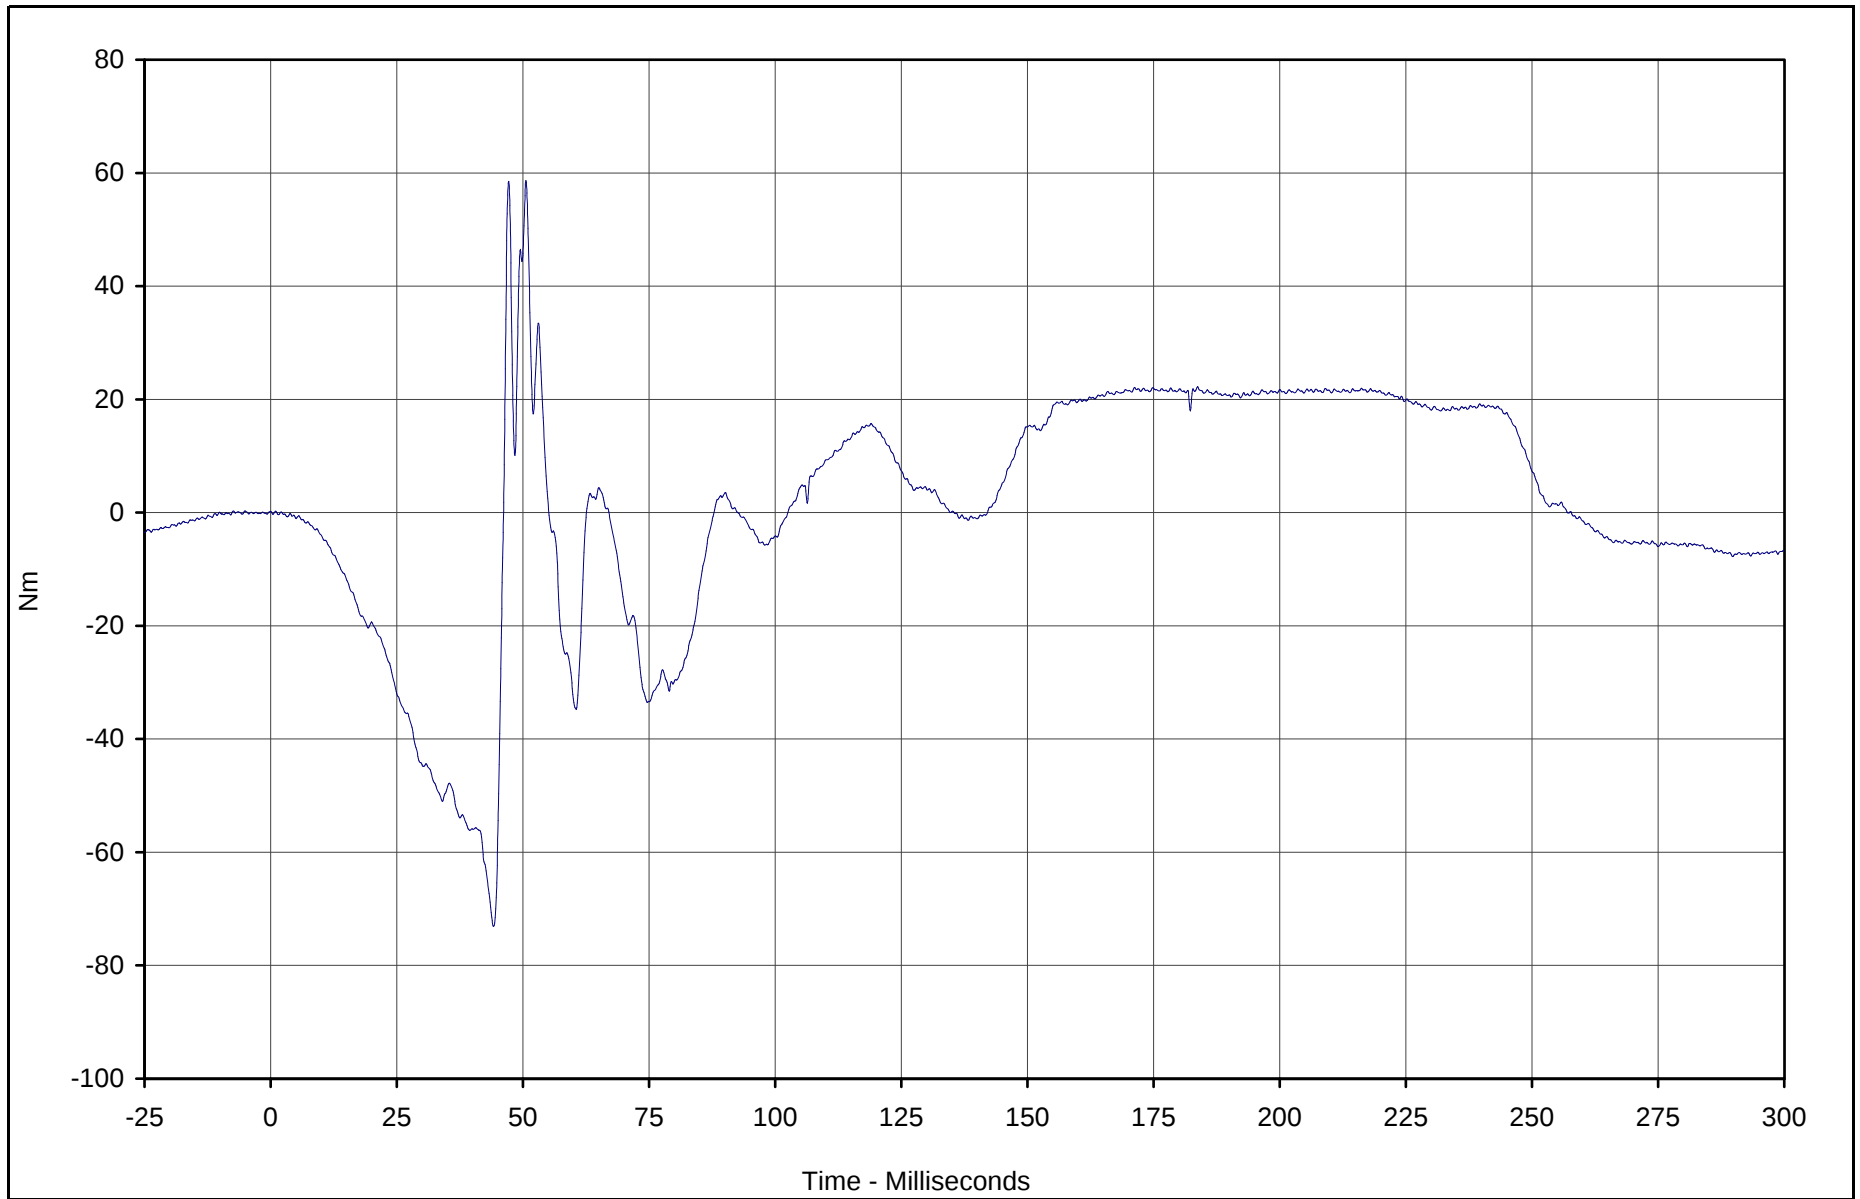

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Left Upper Tibia Moment Y	070	FIL	Nm	58.7	50.6	-73.1	44.2	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

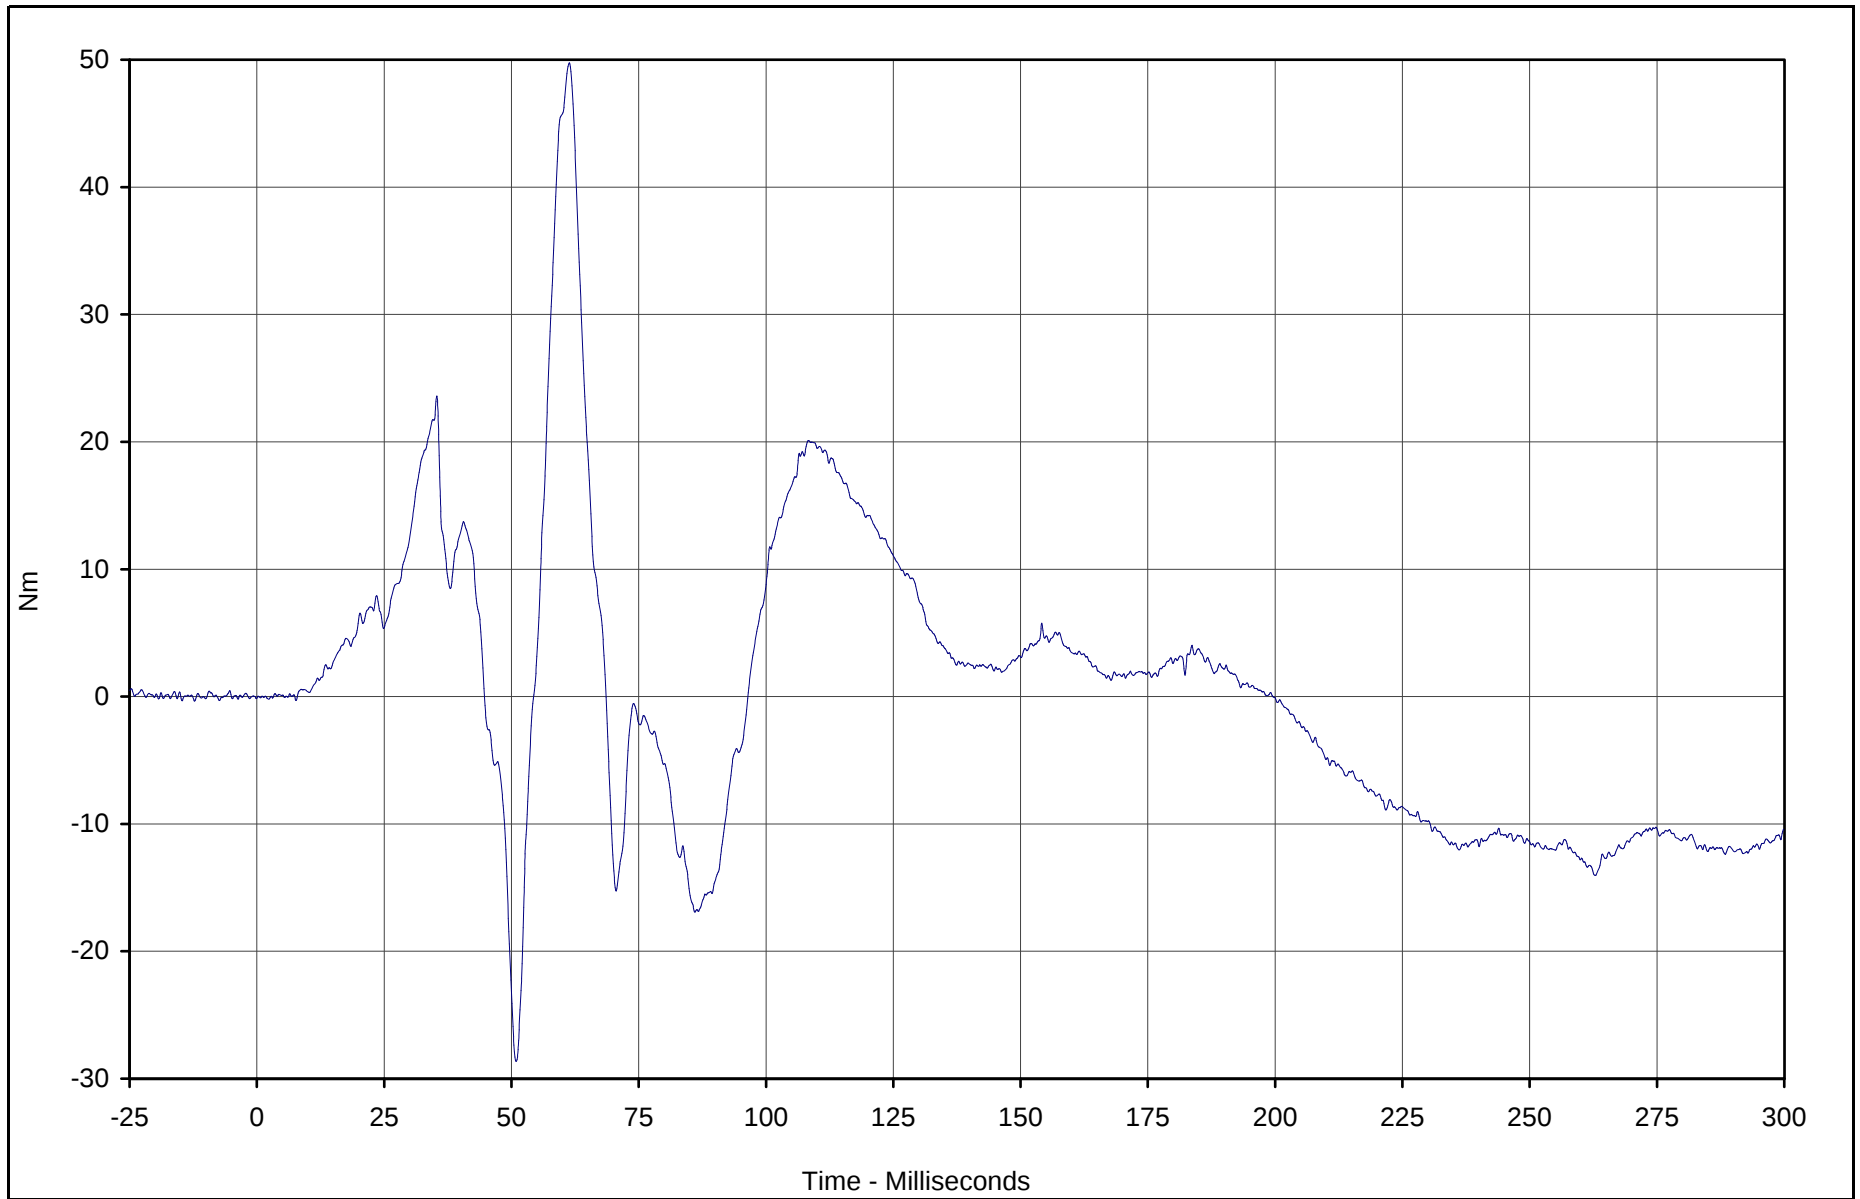

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Right Upper Tibia Moment X	071	FIL	Nm	49.8	61.4	-28.6	50.9	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

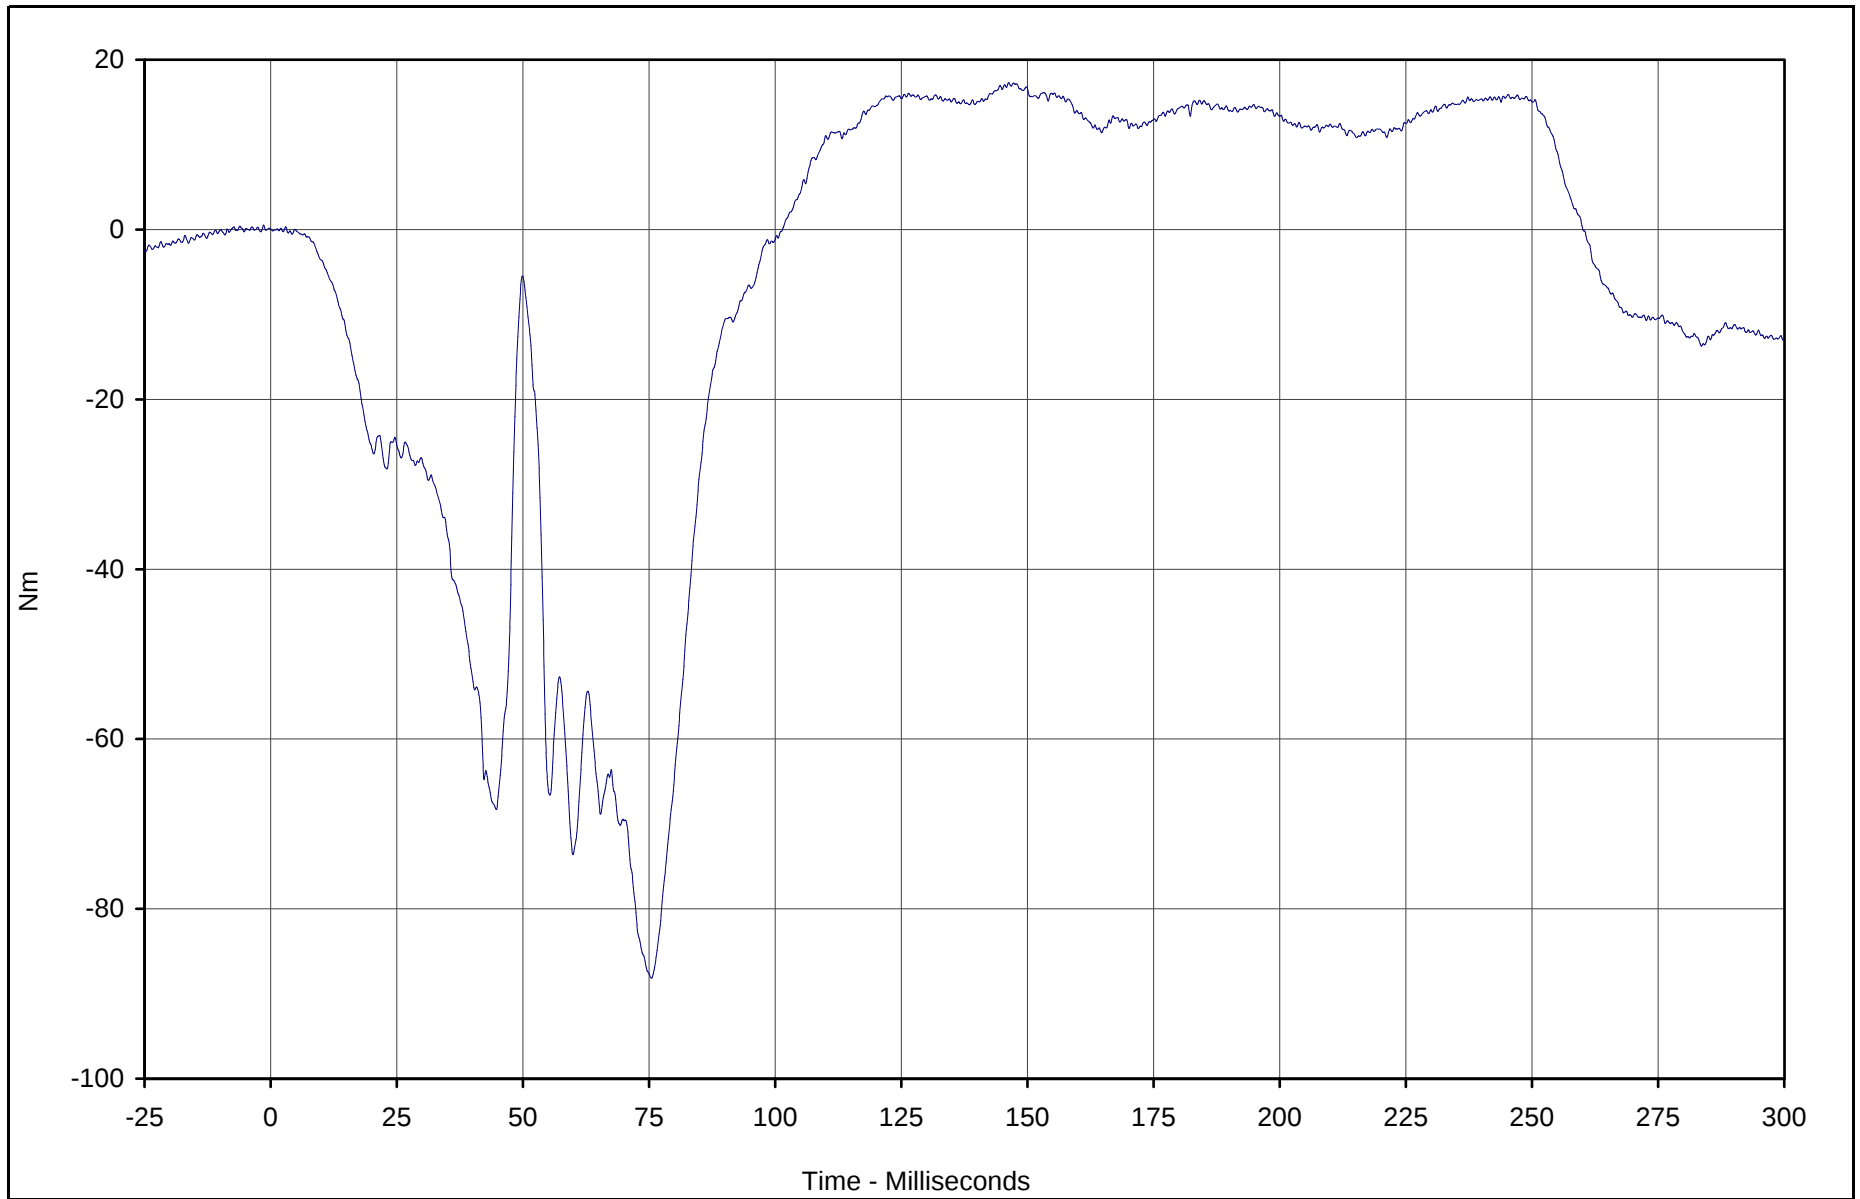

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Right Upper Tibia Moment Y	072	FIL	Nm	17.3	146.3	-88.2	75.5	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

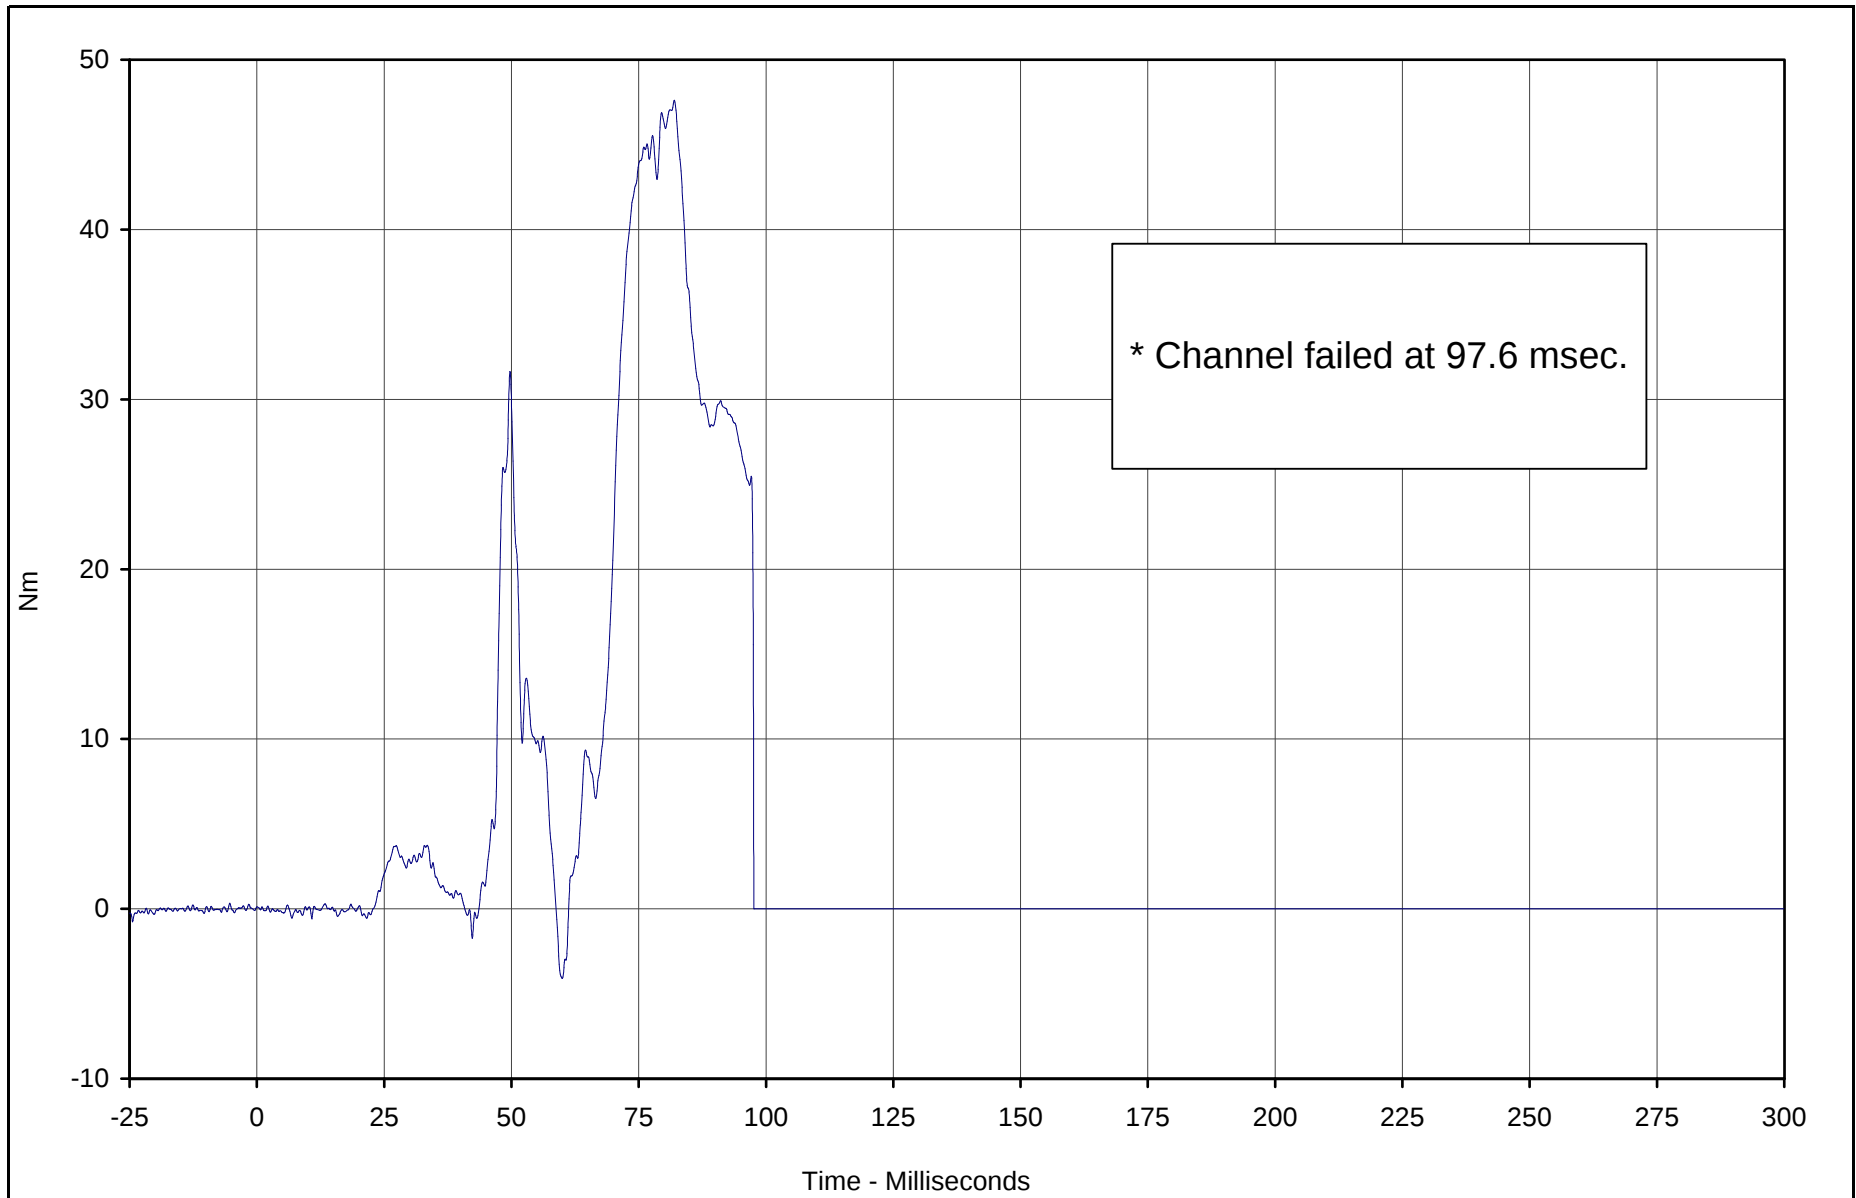

* Channel failed at 97.6 msec.

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Left Lower Tibia Moment X	073	FIL	Nm	47.6	82.0	-4.1	60.0	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

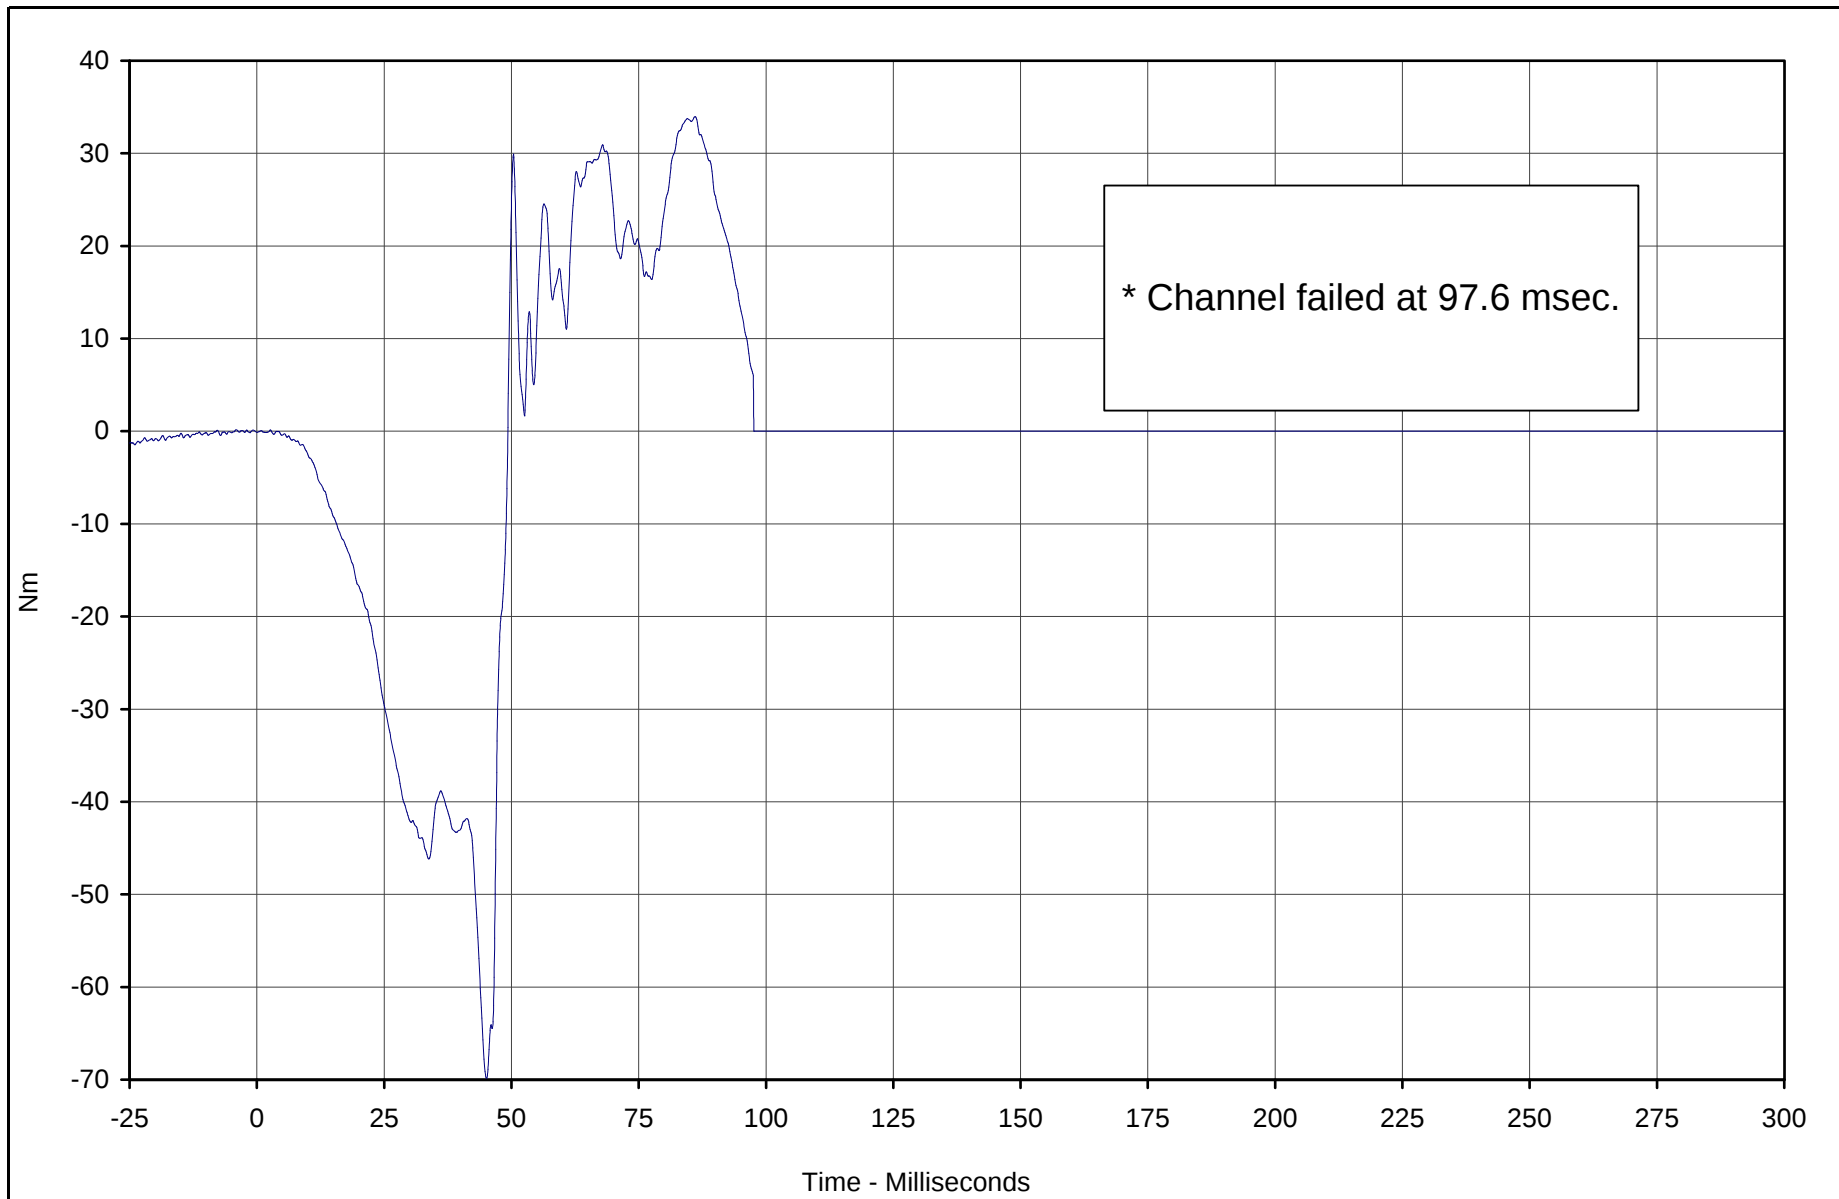

* Channel failed at 97.6 msec.

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Left Lower Tibia Moment Y	074	FIL	Nm	34.0	86.1	-69.8	45.1	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

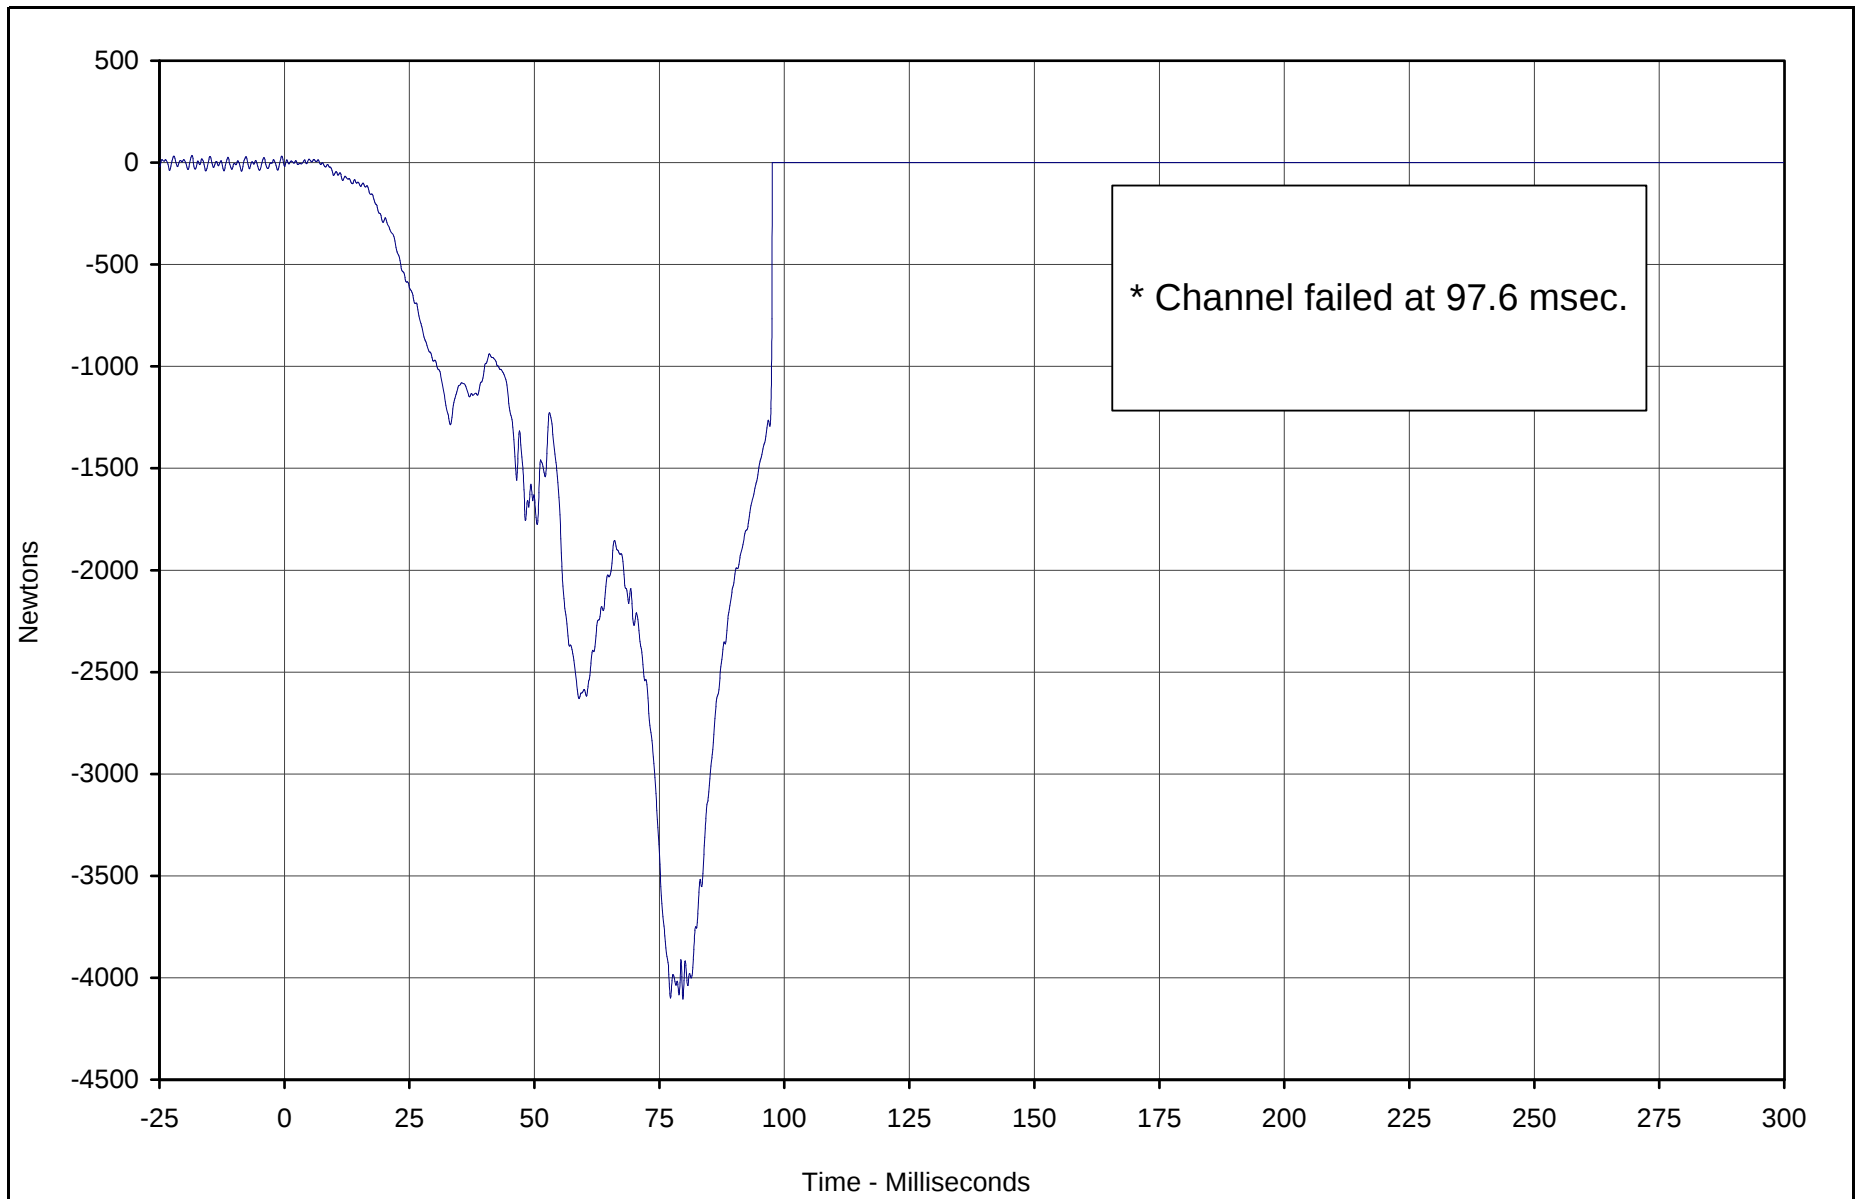

* Channel failed at 97.6 msec.

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Left Lower Tibia Force Z	075	FIL	Newtons	16.6	4.9	-4105.4	79.7	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

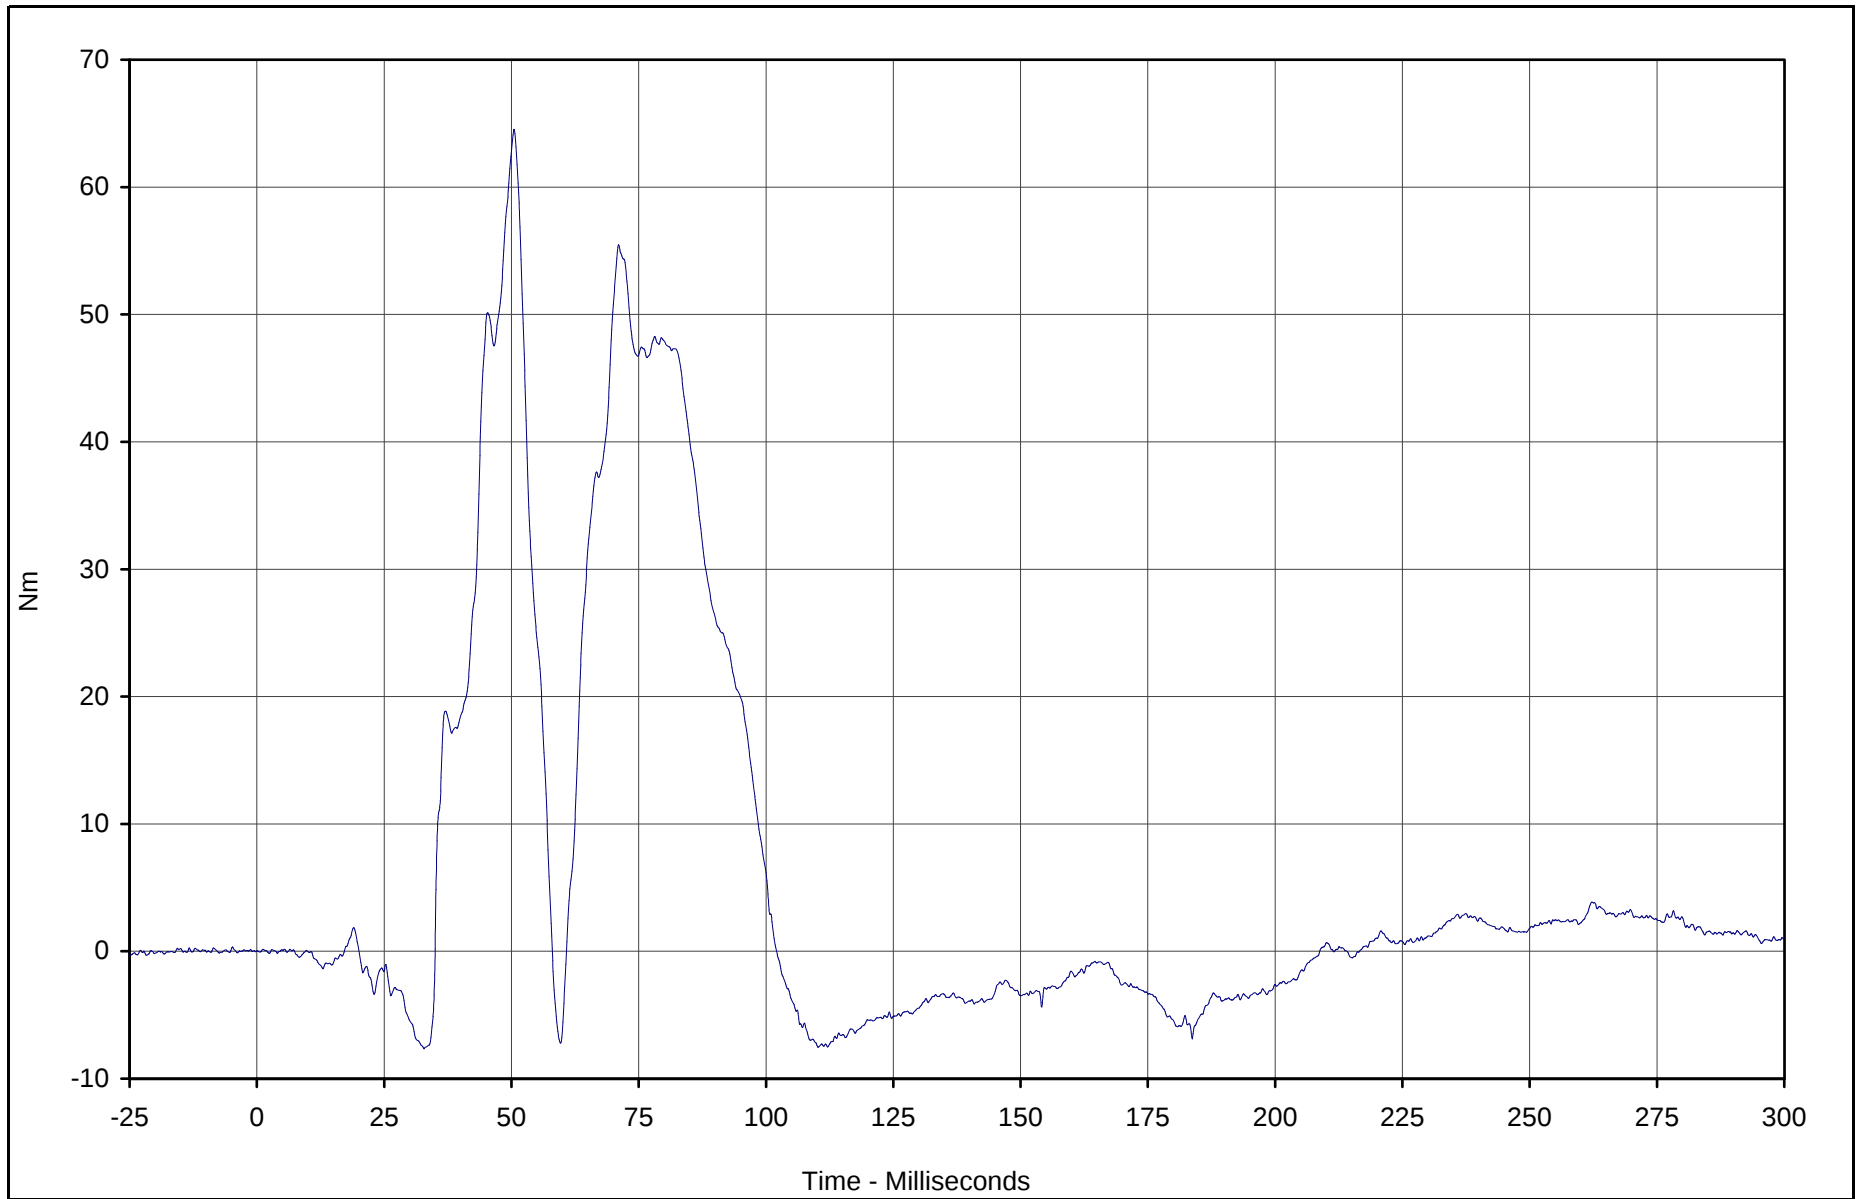

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Right Lower Tibia Moment X	076	FIL	Nm	64.5	50.5	-7.7	32.8	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

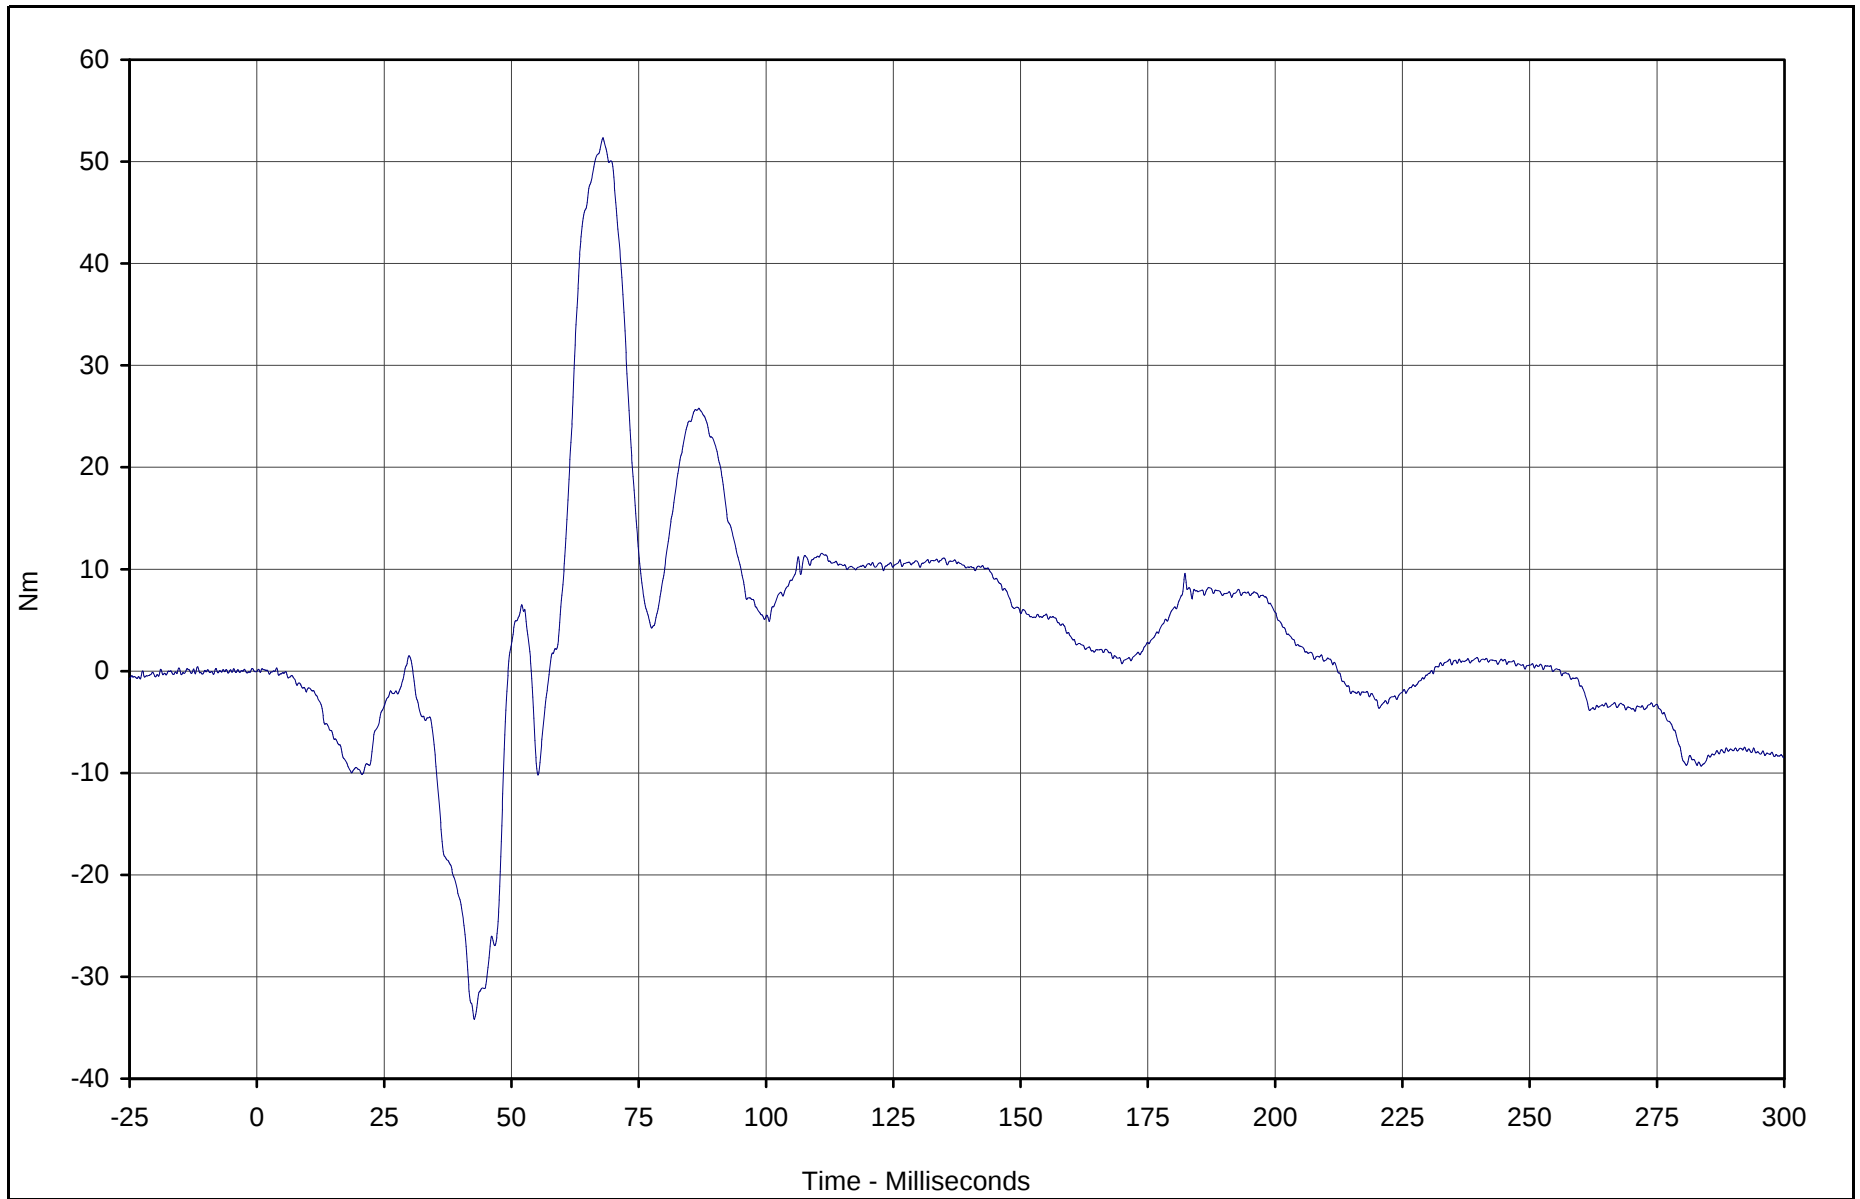

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Right Lower Tibia Moment Y	077	FIL	Nm	52.3	68.0	-34.2	42.7	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

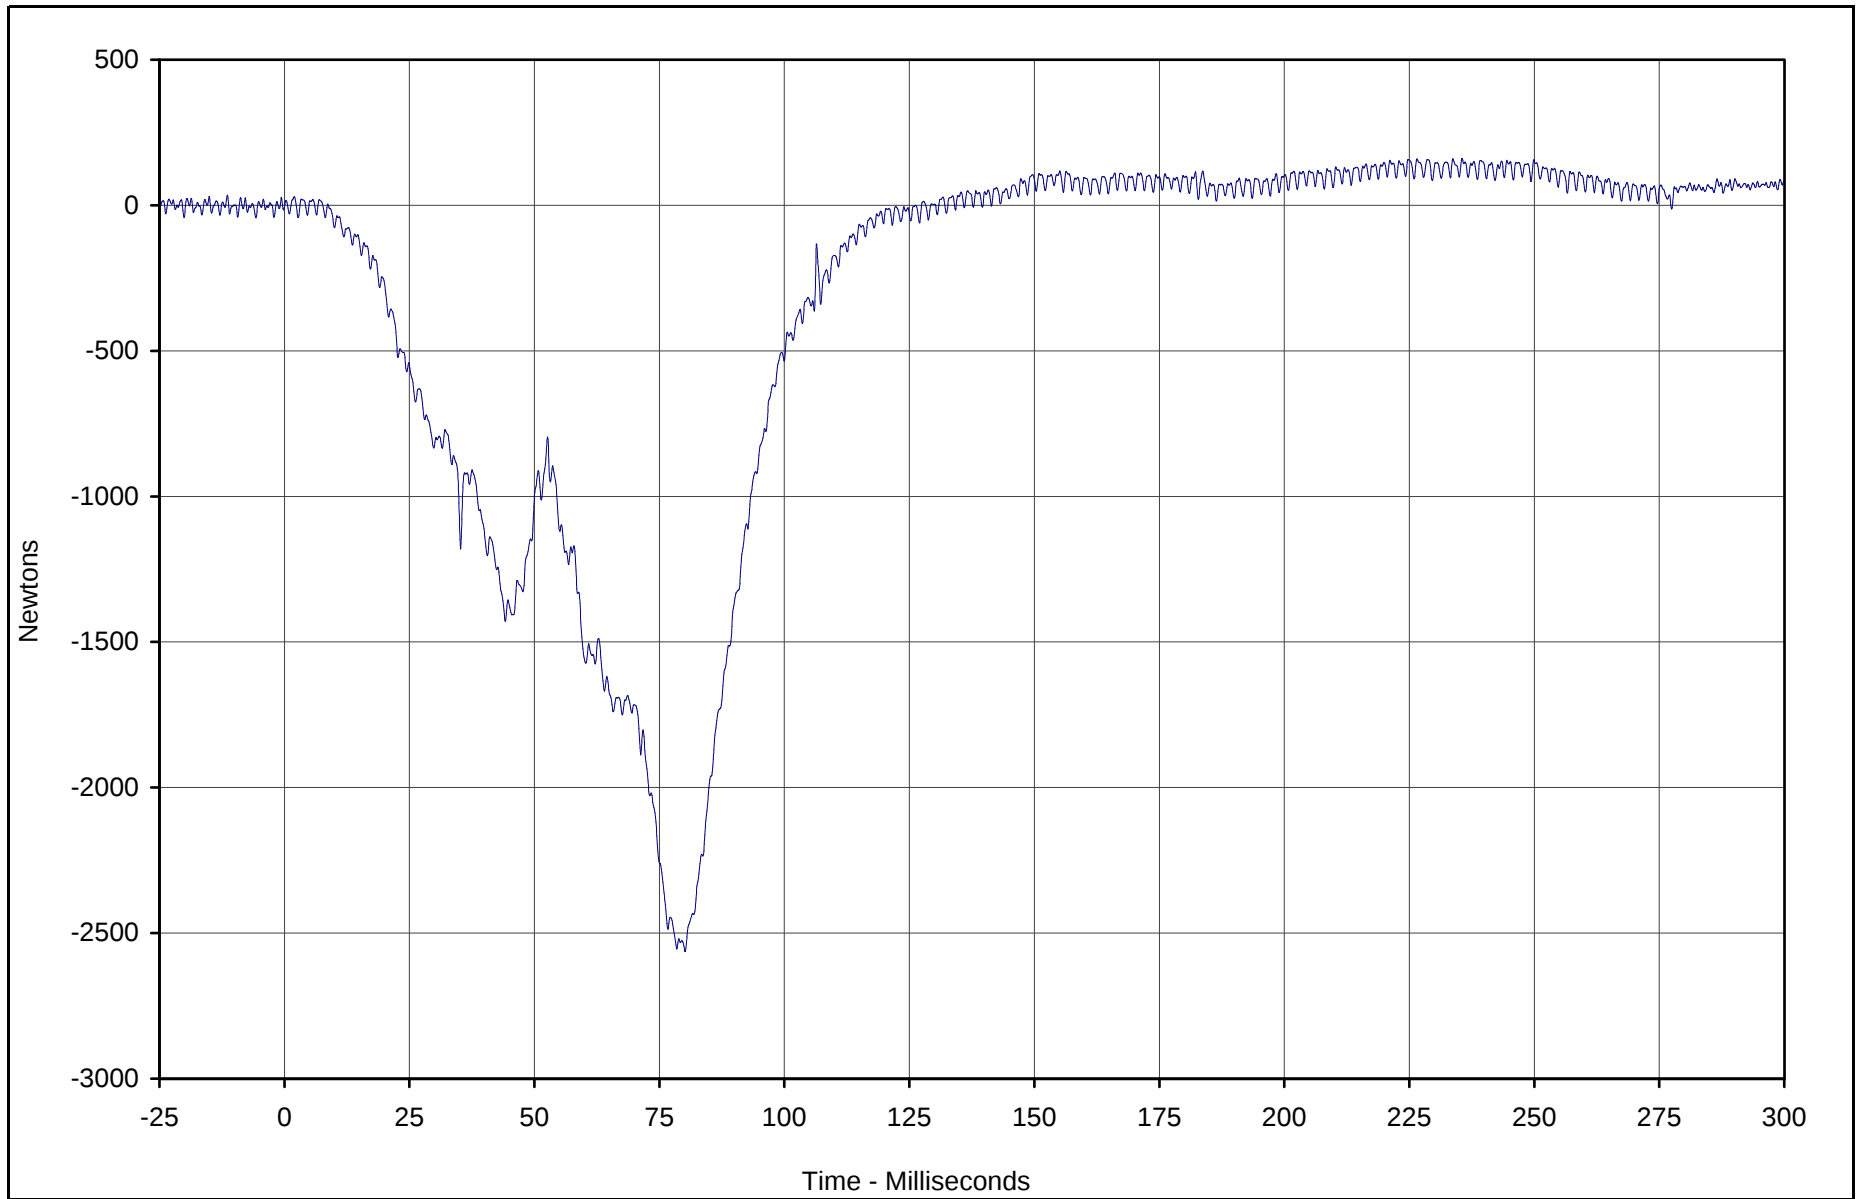

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Right lower Tibia Force Z	078	FIL	Newtons	161.2	235.5	-2563.5	80.1	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

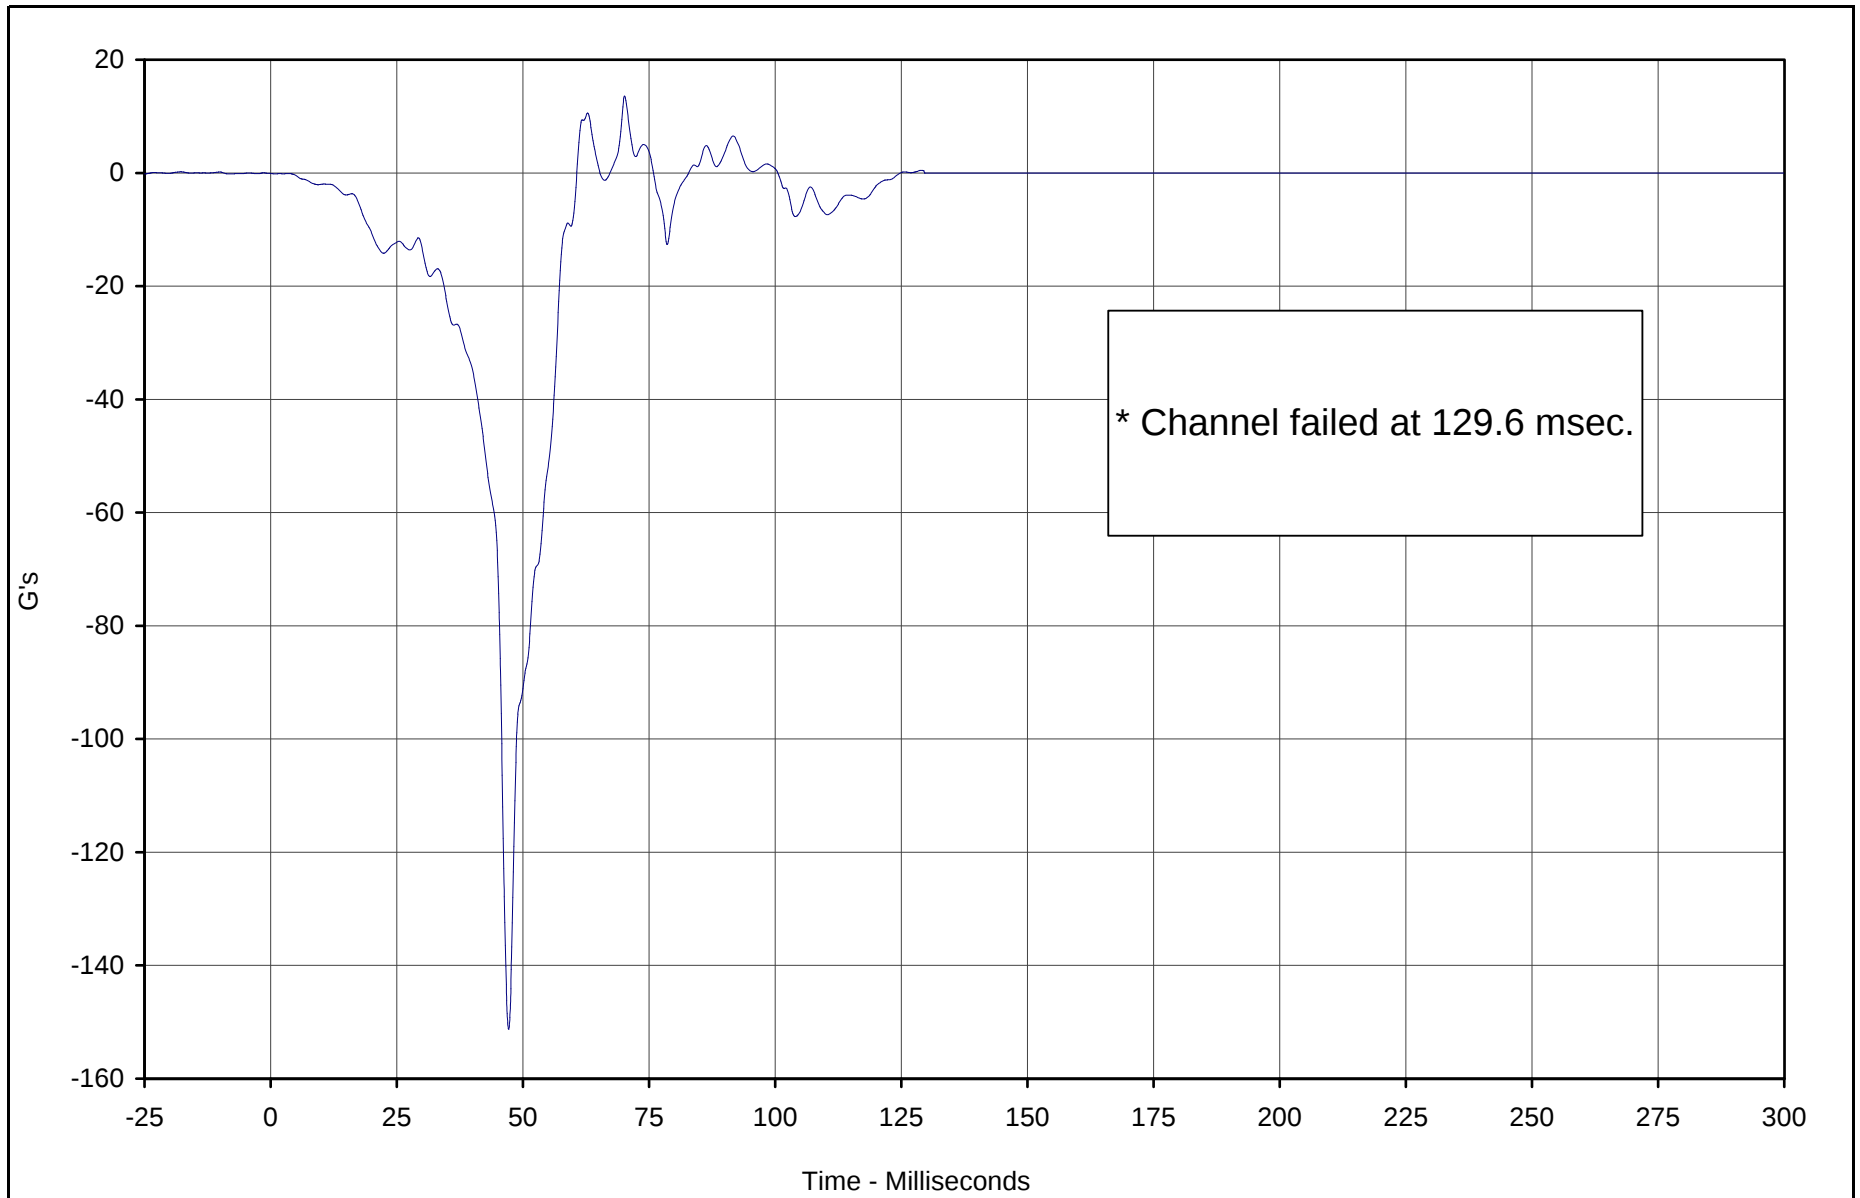

* Channel failed at 129.6 msec.

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Left Foot Aft X	079	FIL	G's	13.5	70.2	-151.3	47.2	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

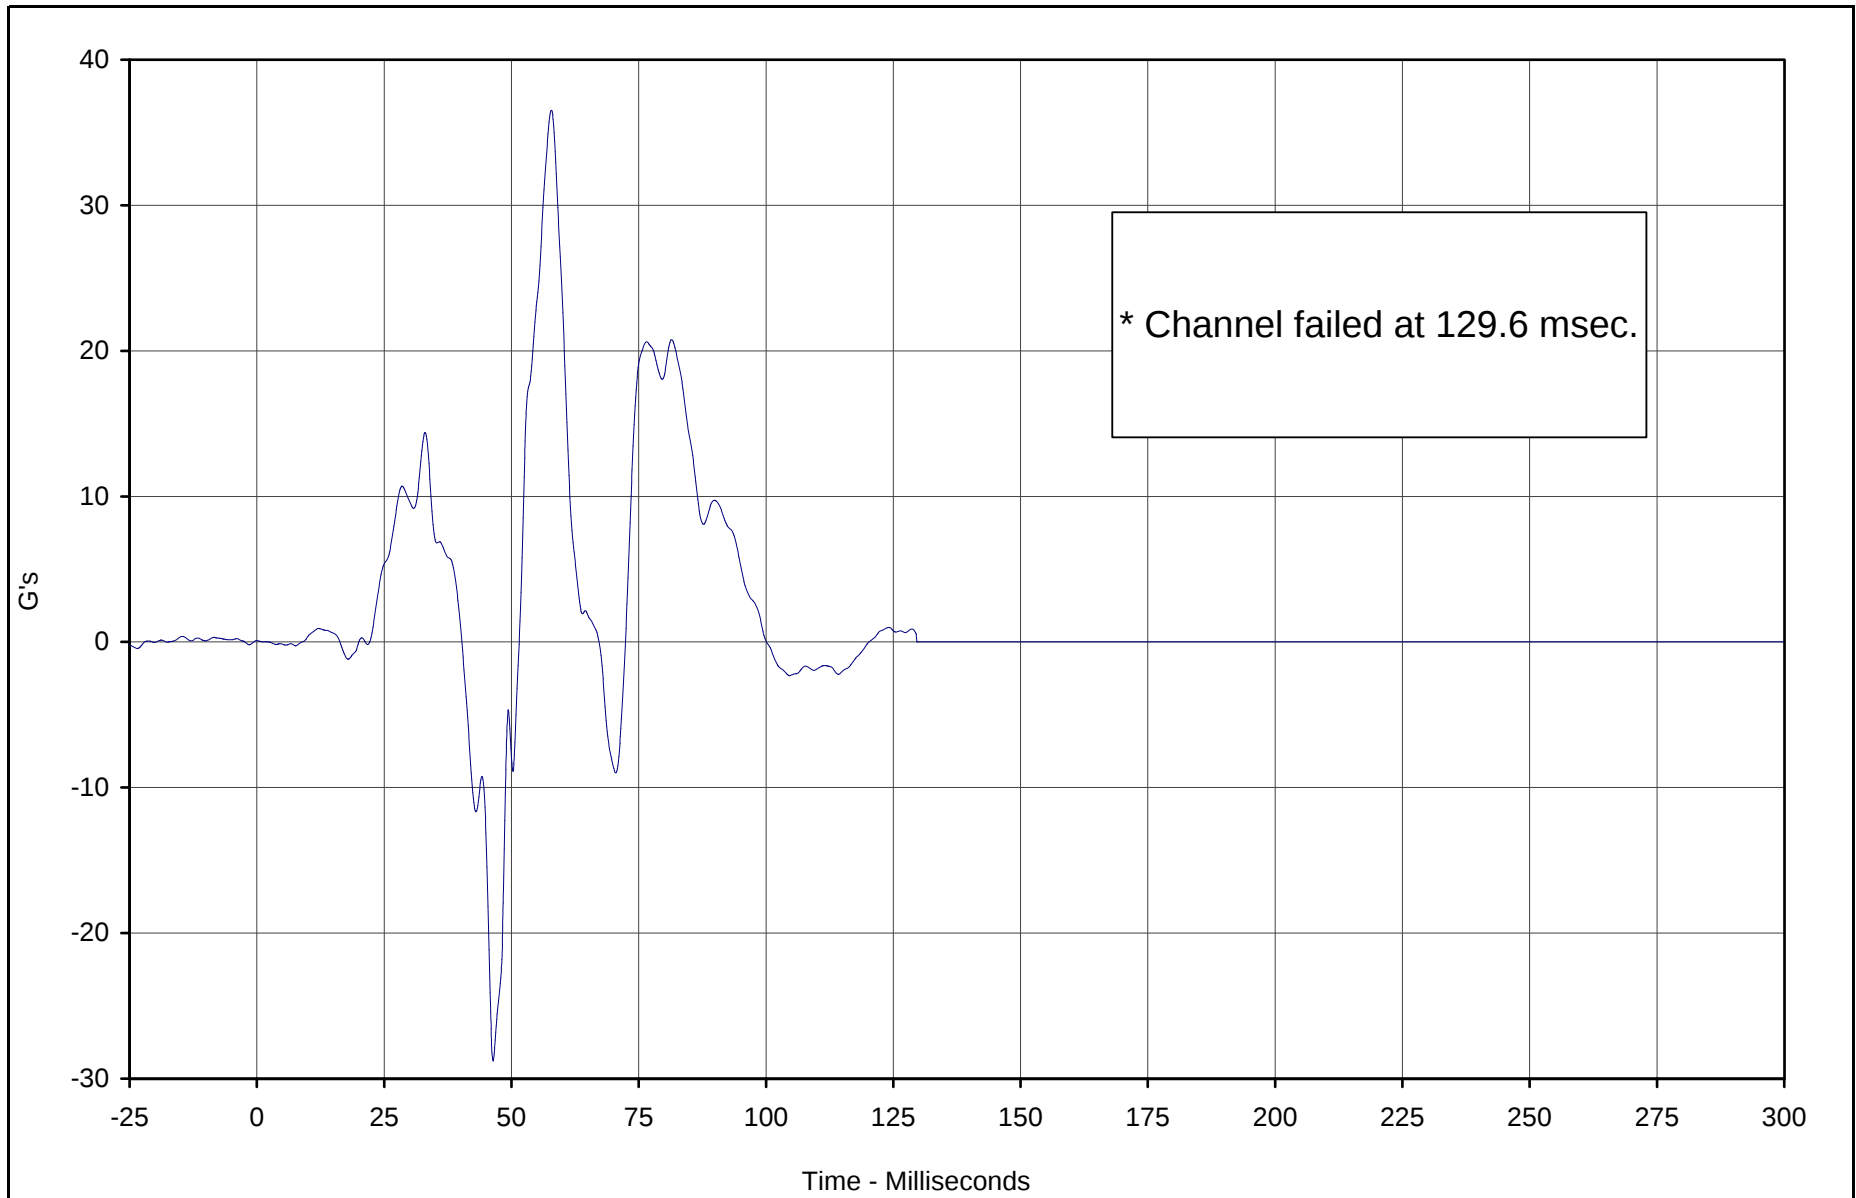

* Channel failed at 129.6 msec.

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Left Foot Aft Z	080	FIL	G's	36.5	57.8	-28.8	46.4	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

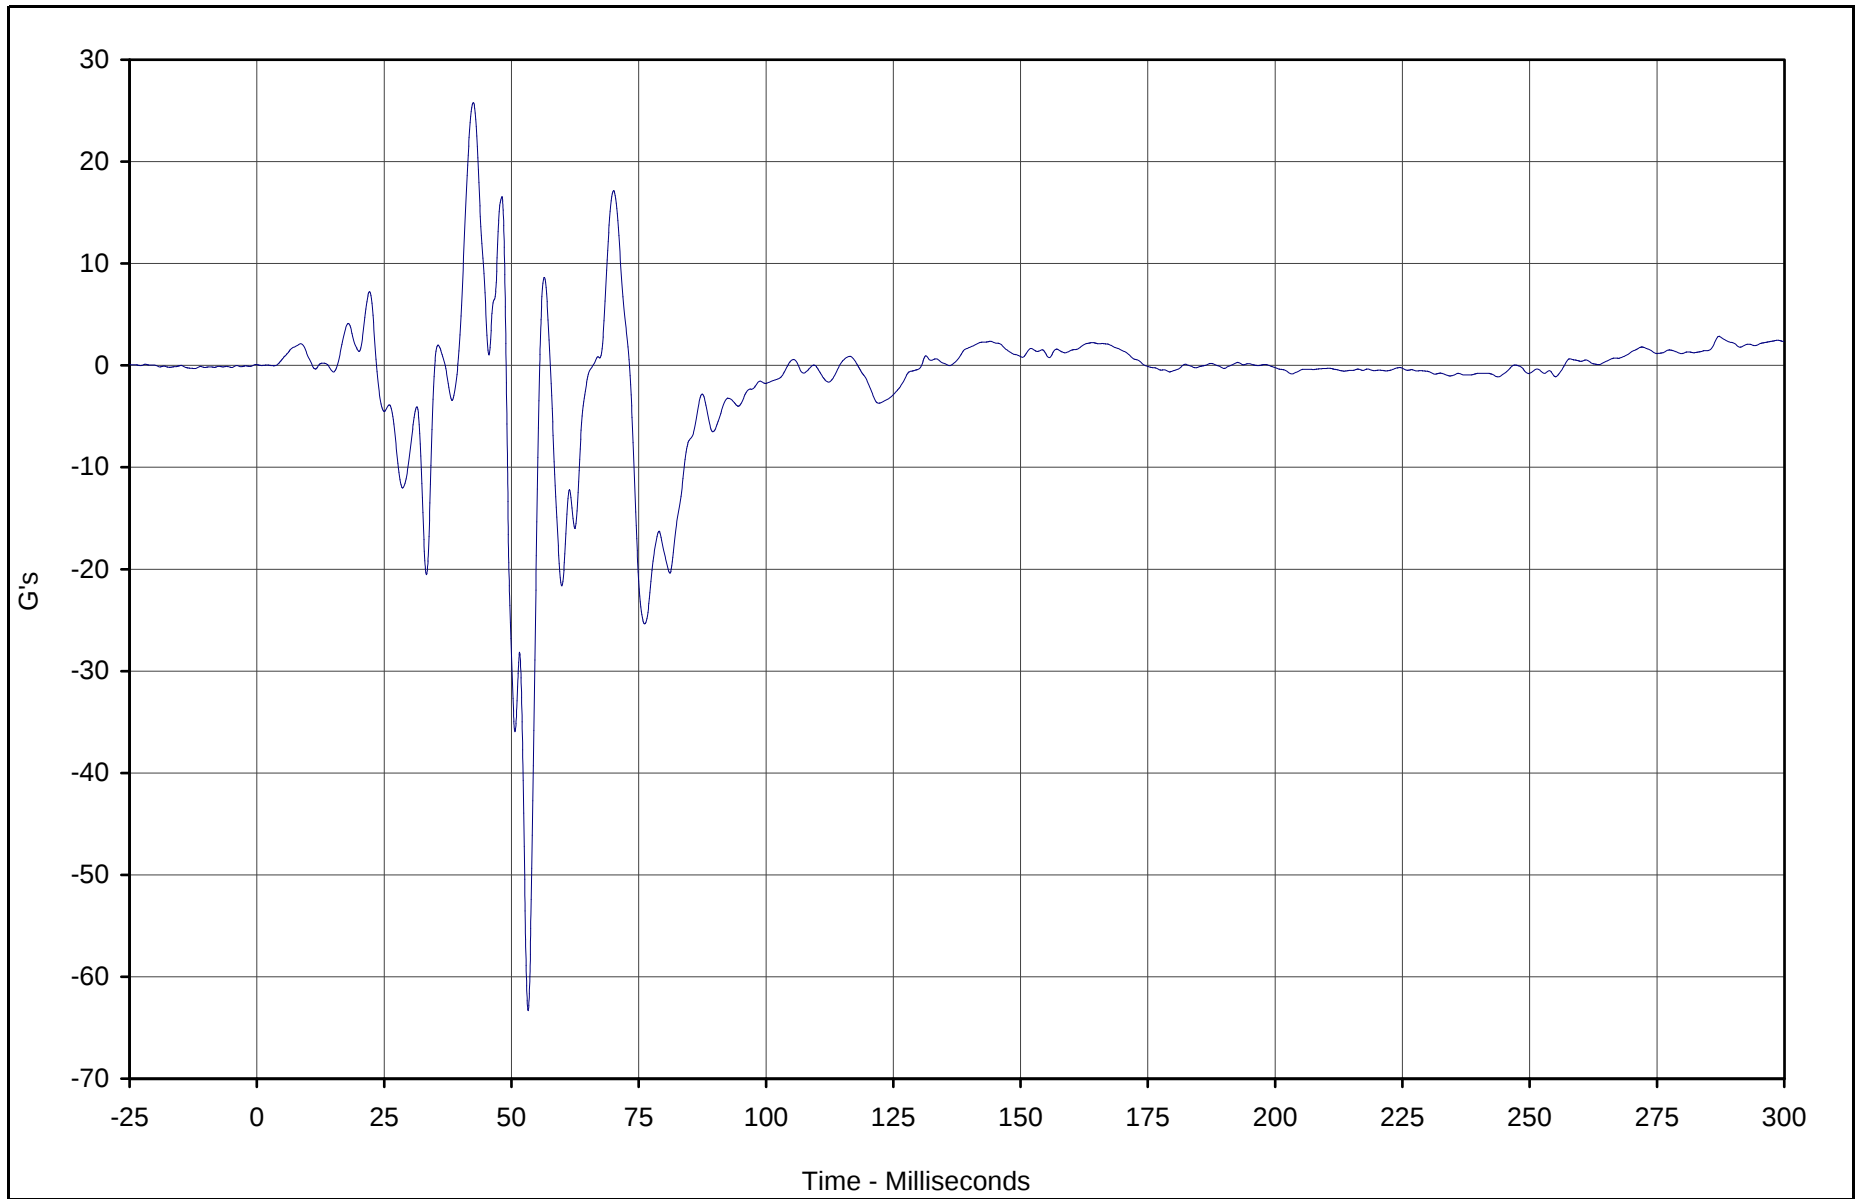

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Left Foot Fore Z	081	FIL	G's	25.8	42.5	-63.3	53.3	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

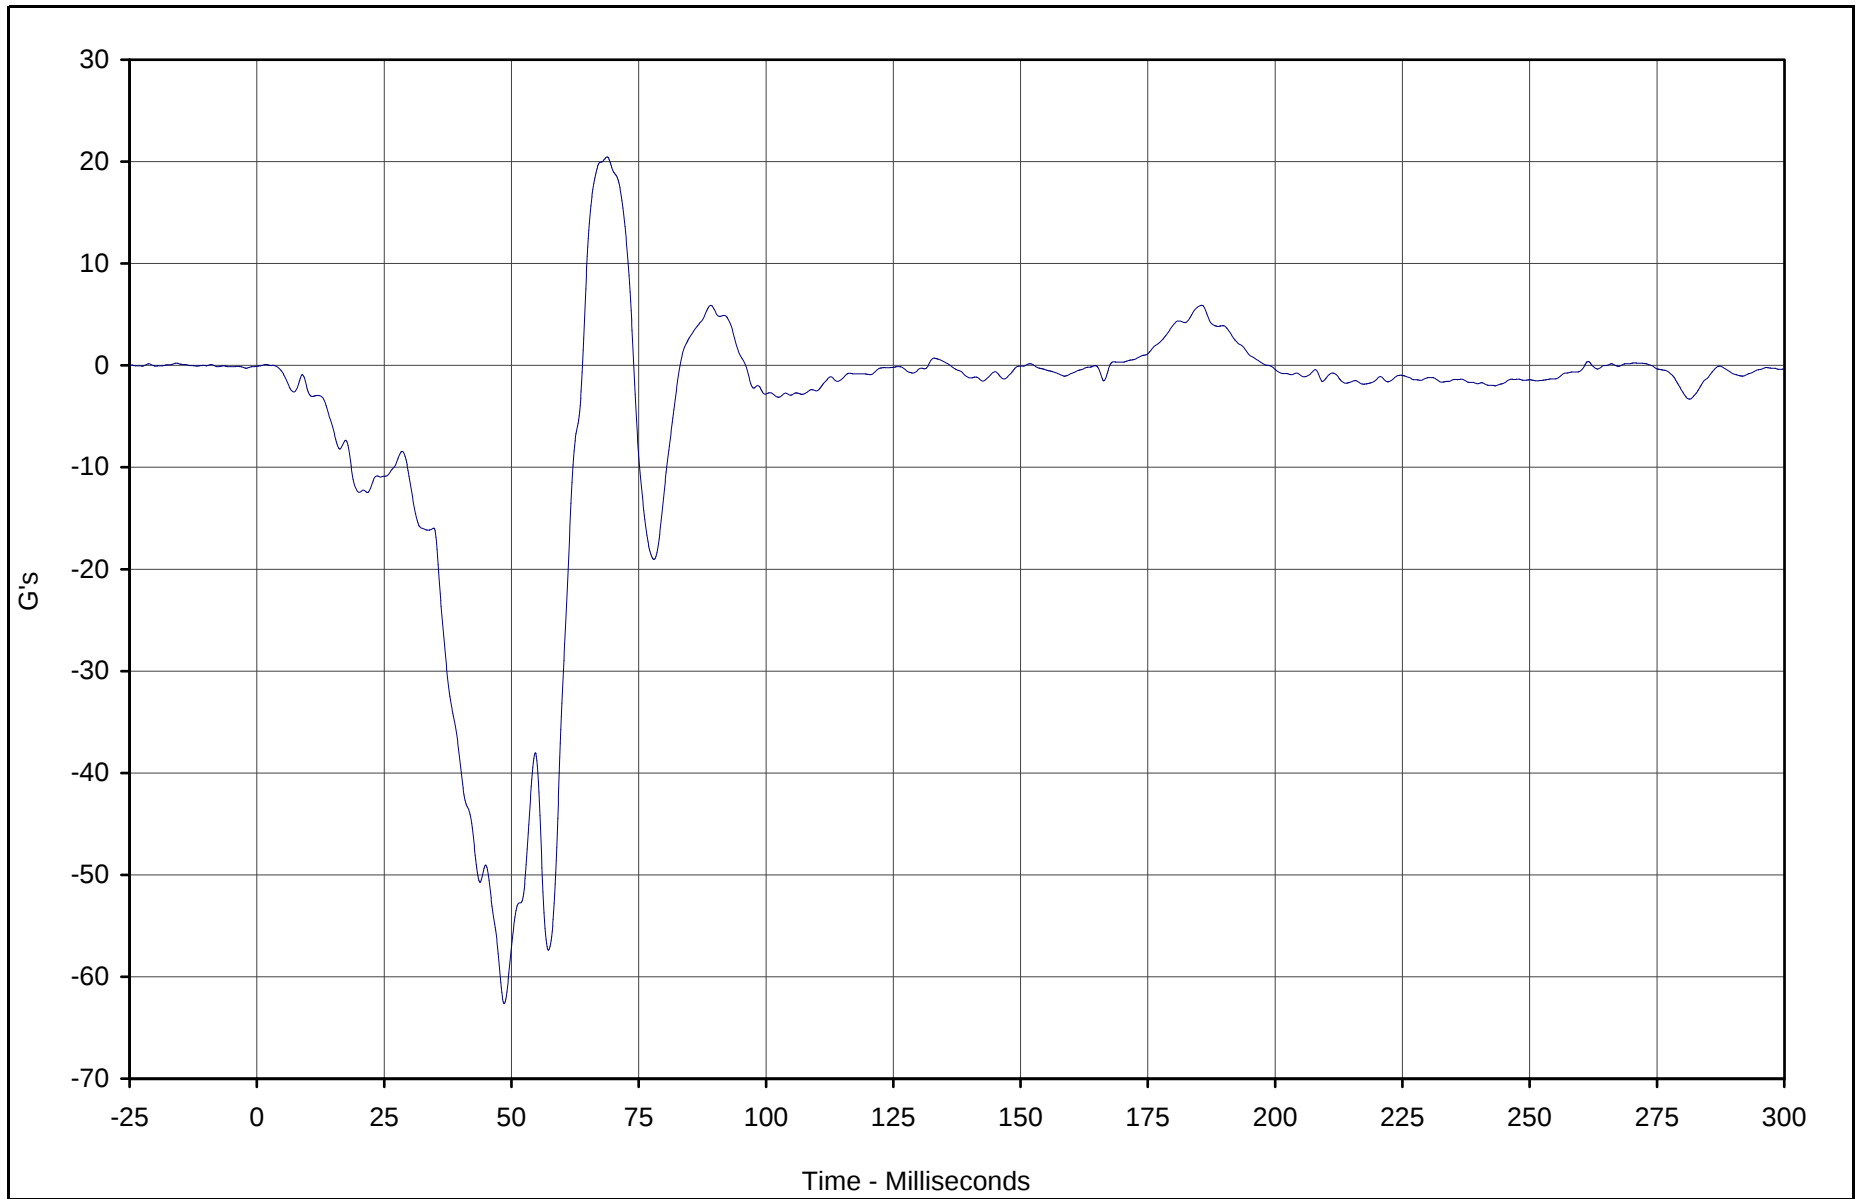

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Right Foot Aft X	082	FIL	G's	20.5	68.8	-62.6	48.6	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

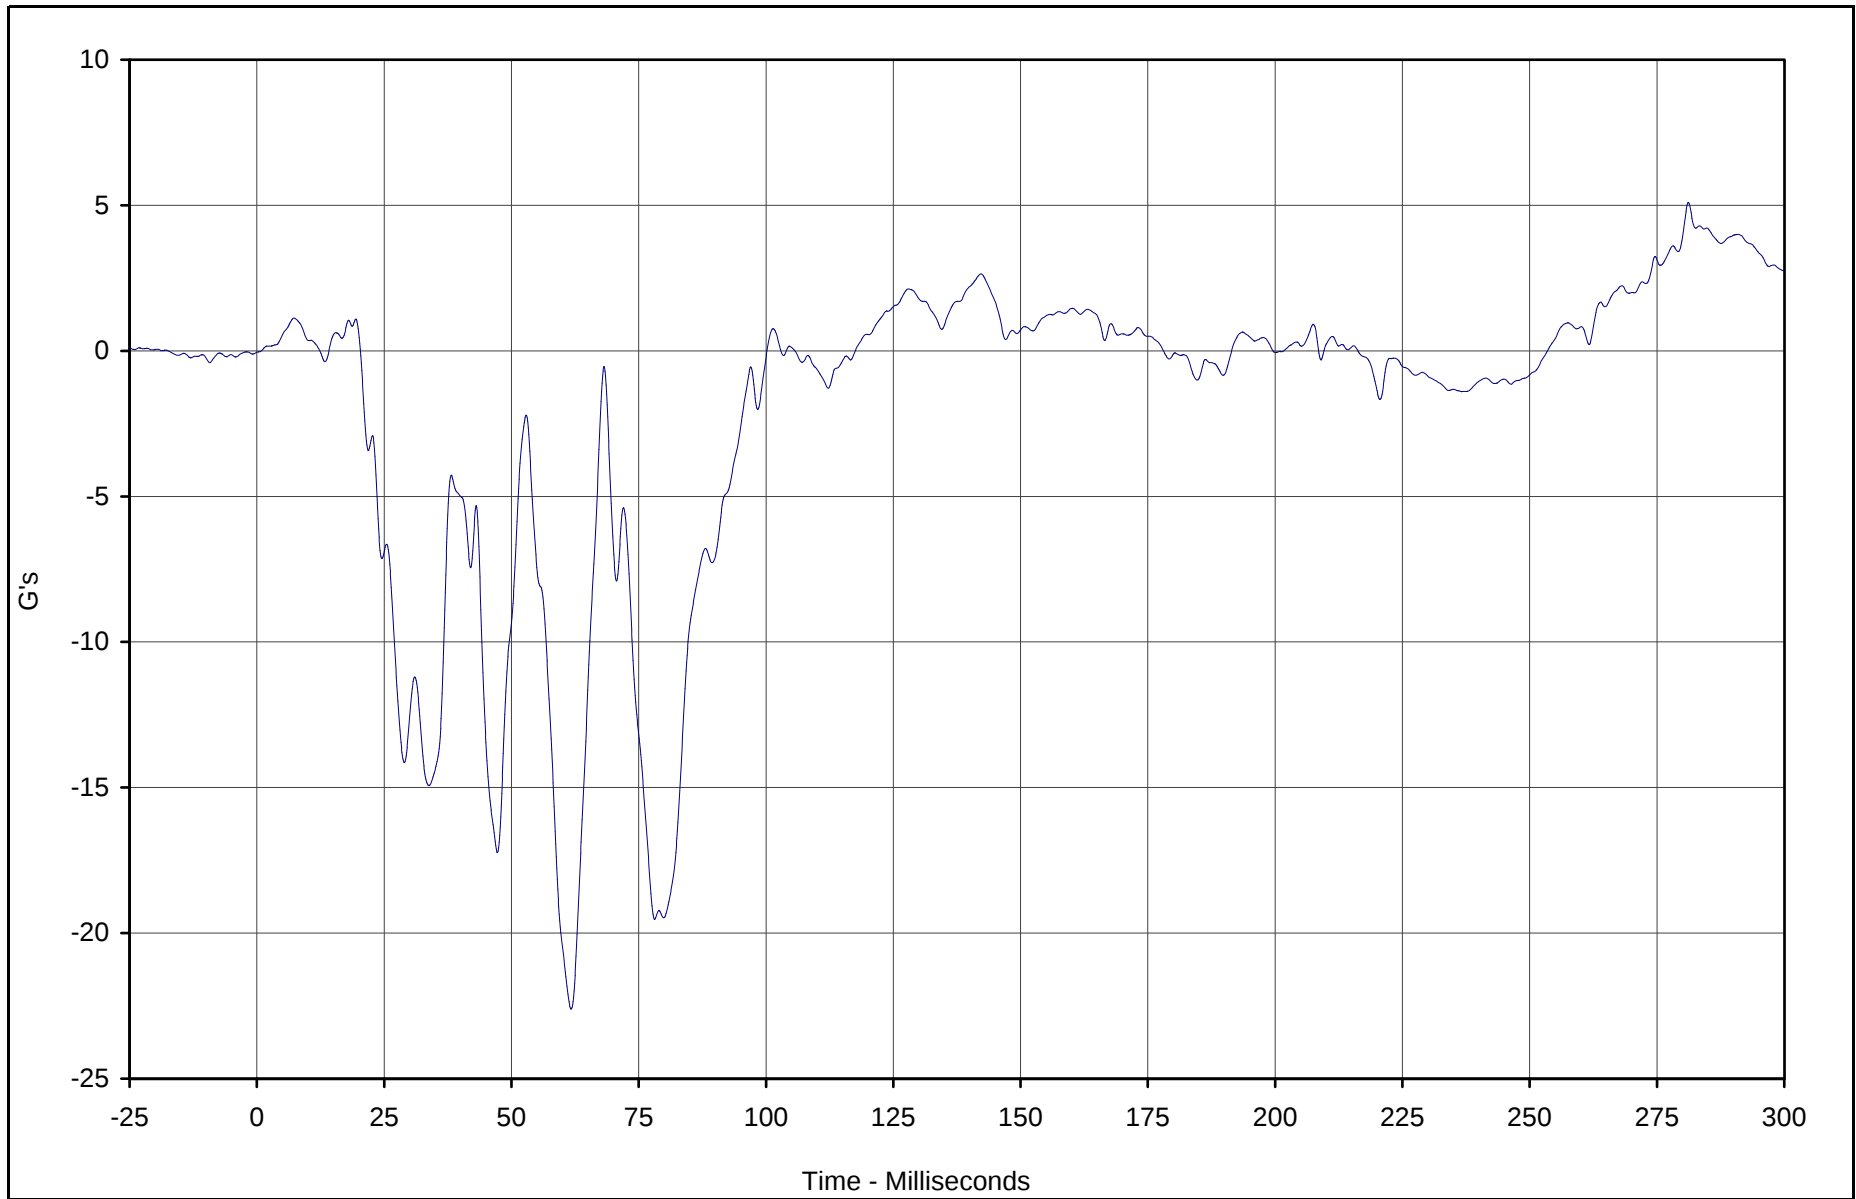

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Right Foot Aft Z	083	FIL	G's	5.1	281.2	-22.6	61.7	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

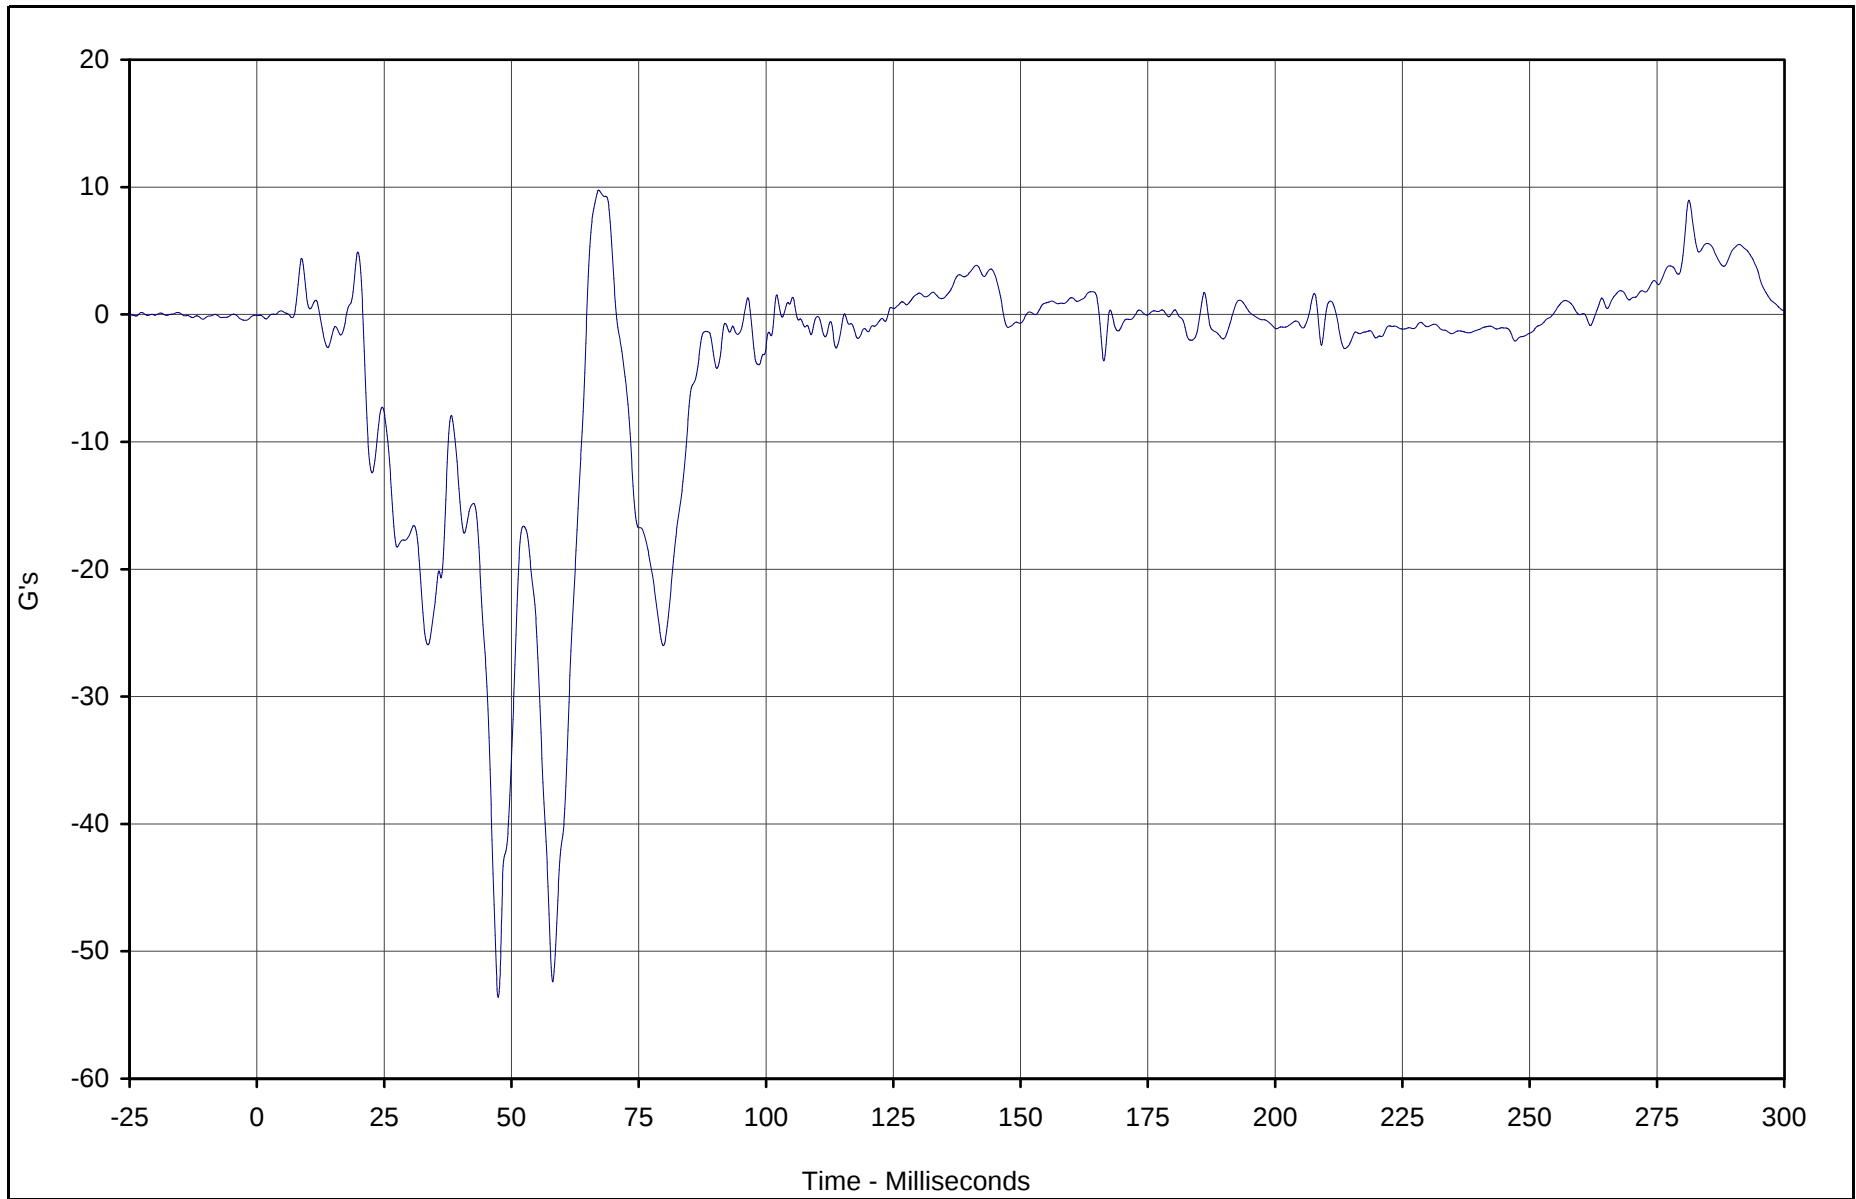

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Right Foot Fore Z	084	FIL	G's	9.8	67.1	-53.6	47.4	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

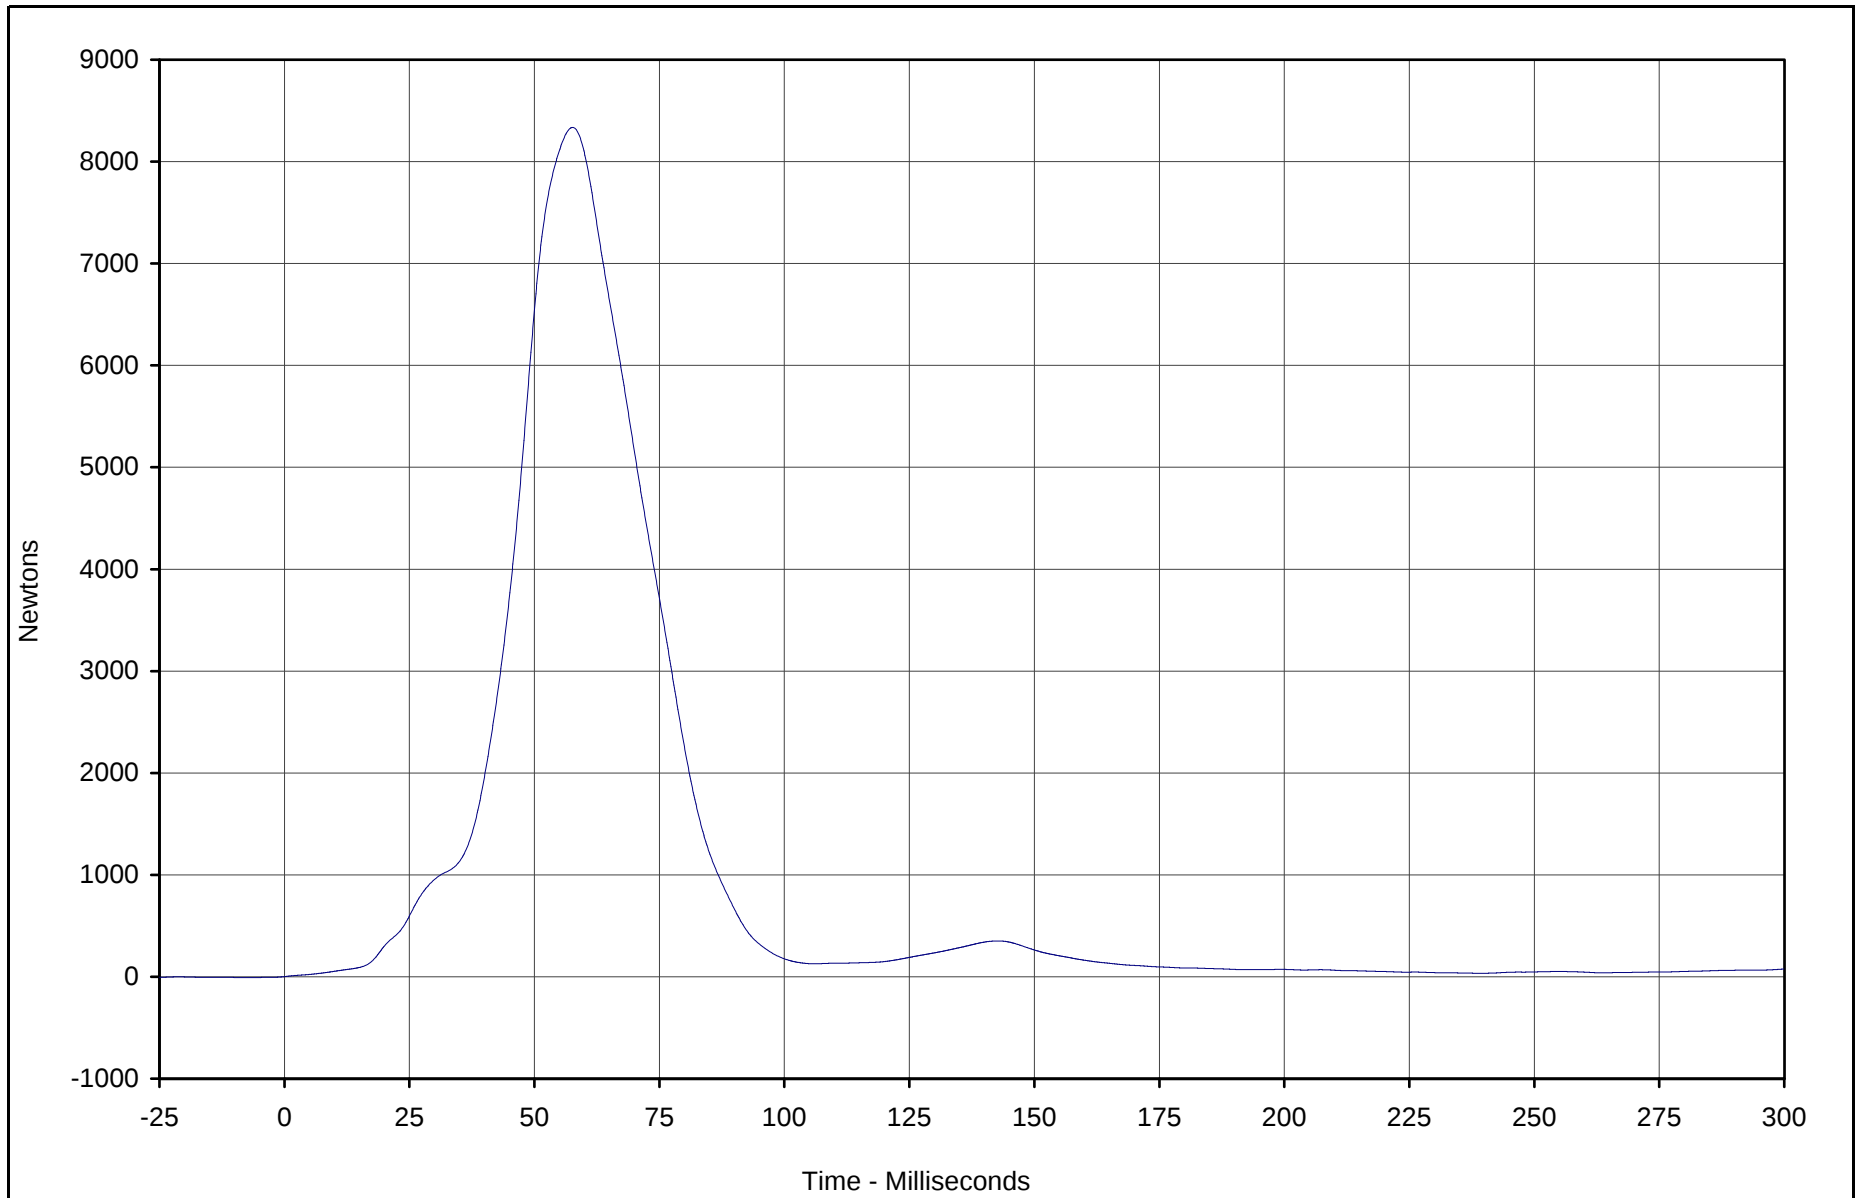

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Lap Belt Force	085	FIL	Newtons	8335.9	57.6	1.4	0.0	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

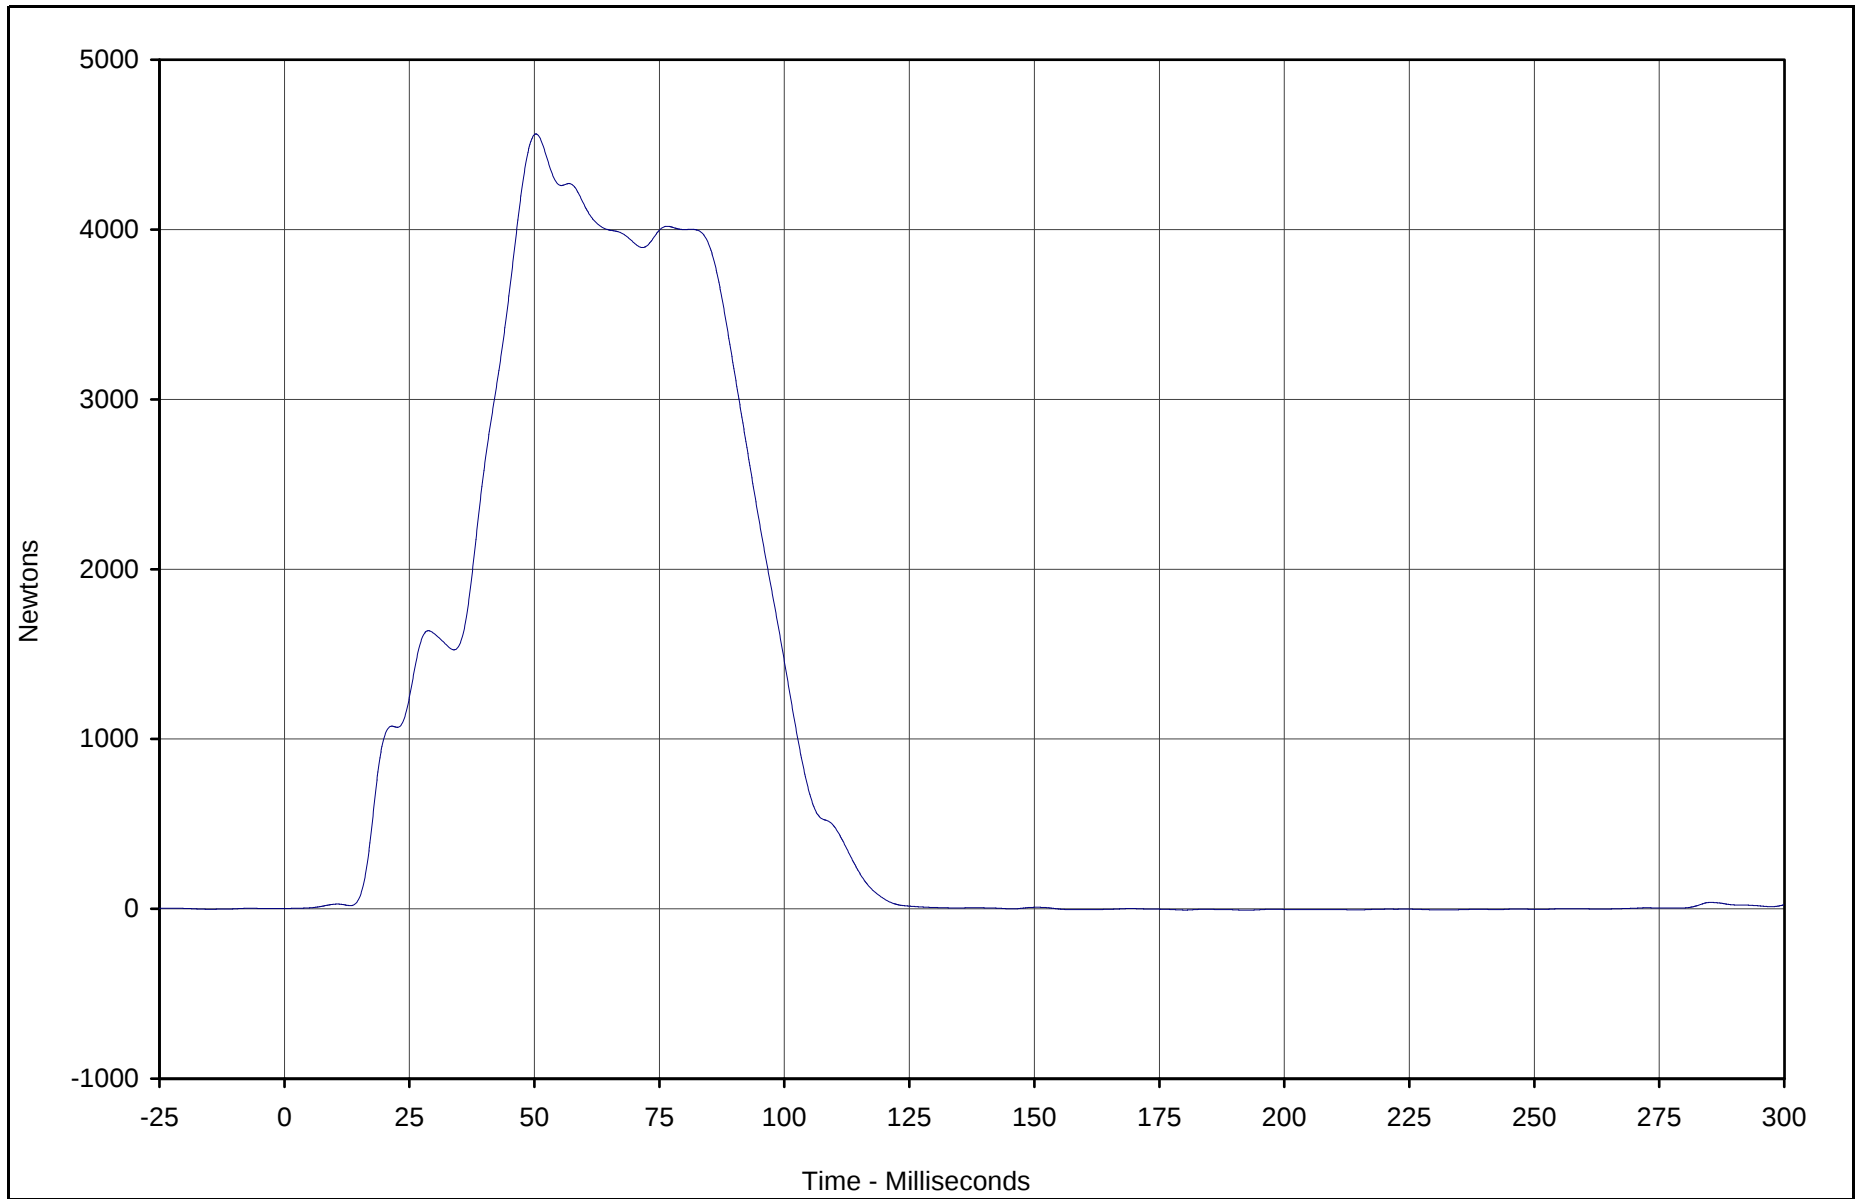

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Shoulder Belt Force	086	FIL	Newtons	4562.9	50.3	-7.5	191.9	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

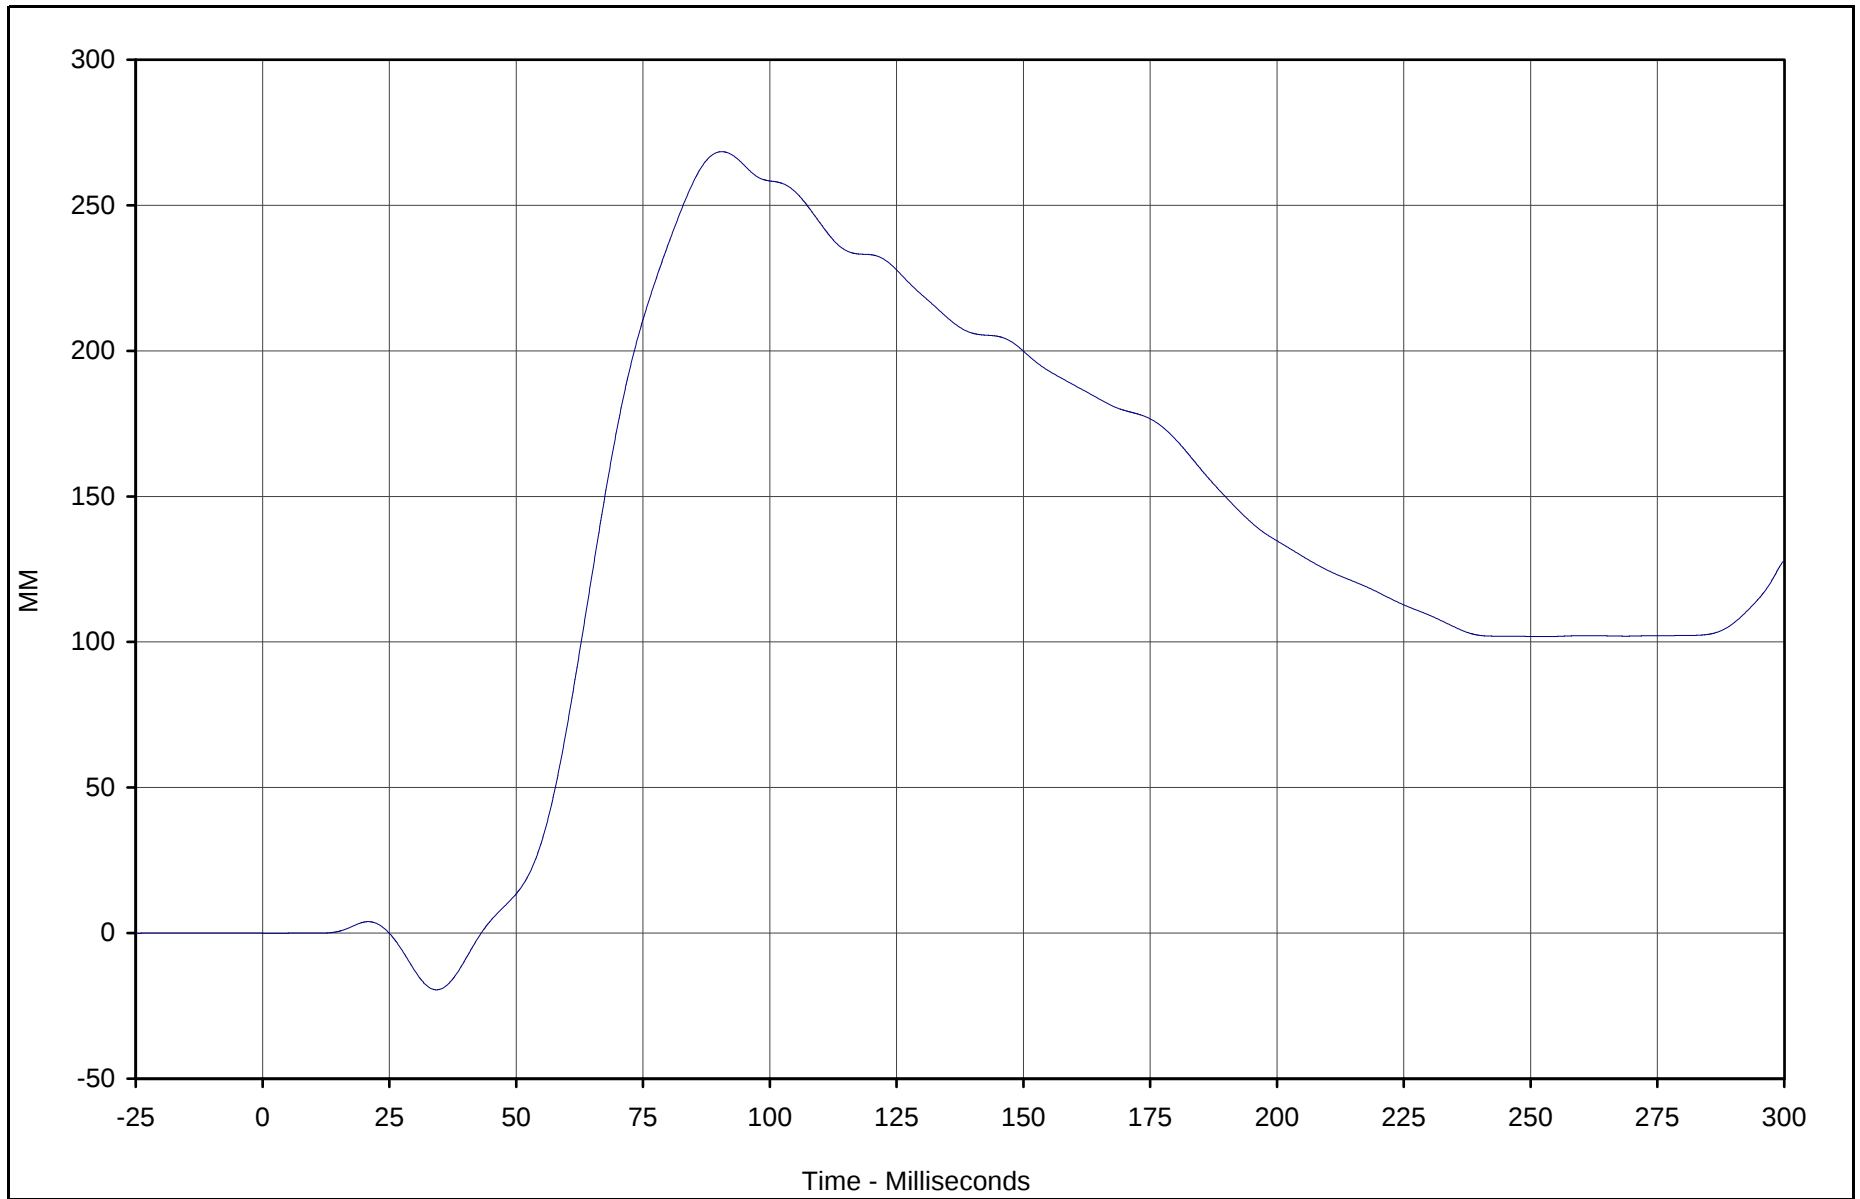

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Shoulder Belt Pullout	087	FIL	MM	268.4	90.5	-19.5	34.3	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

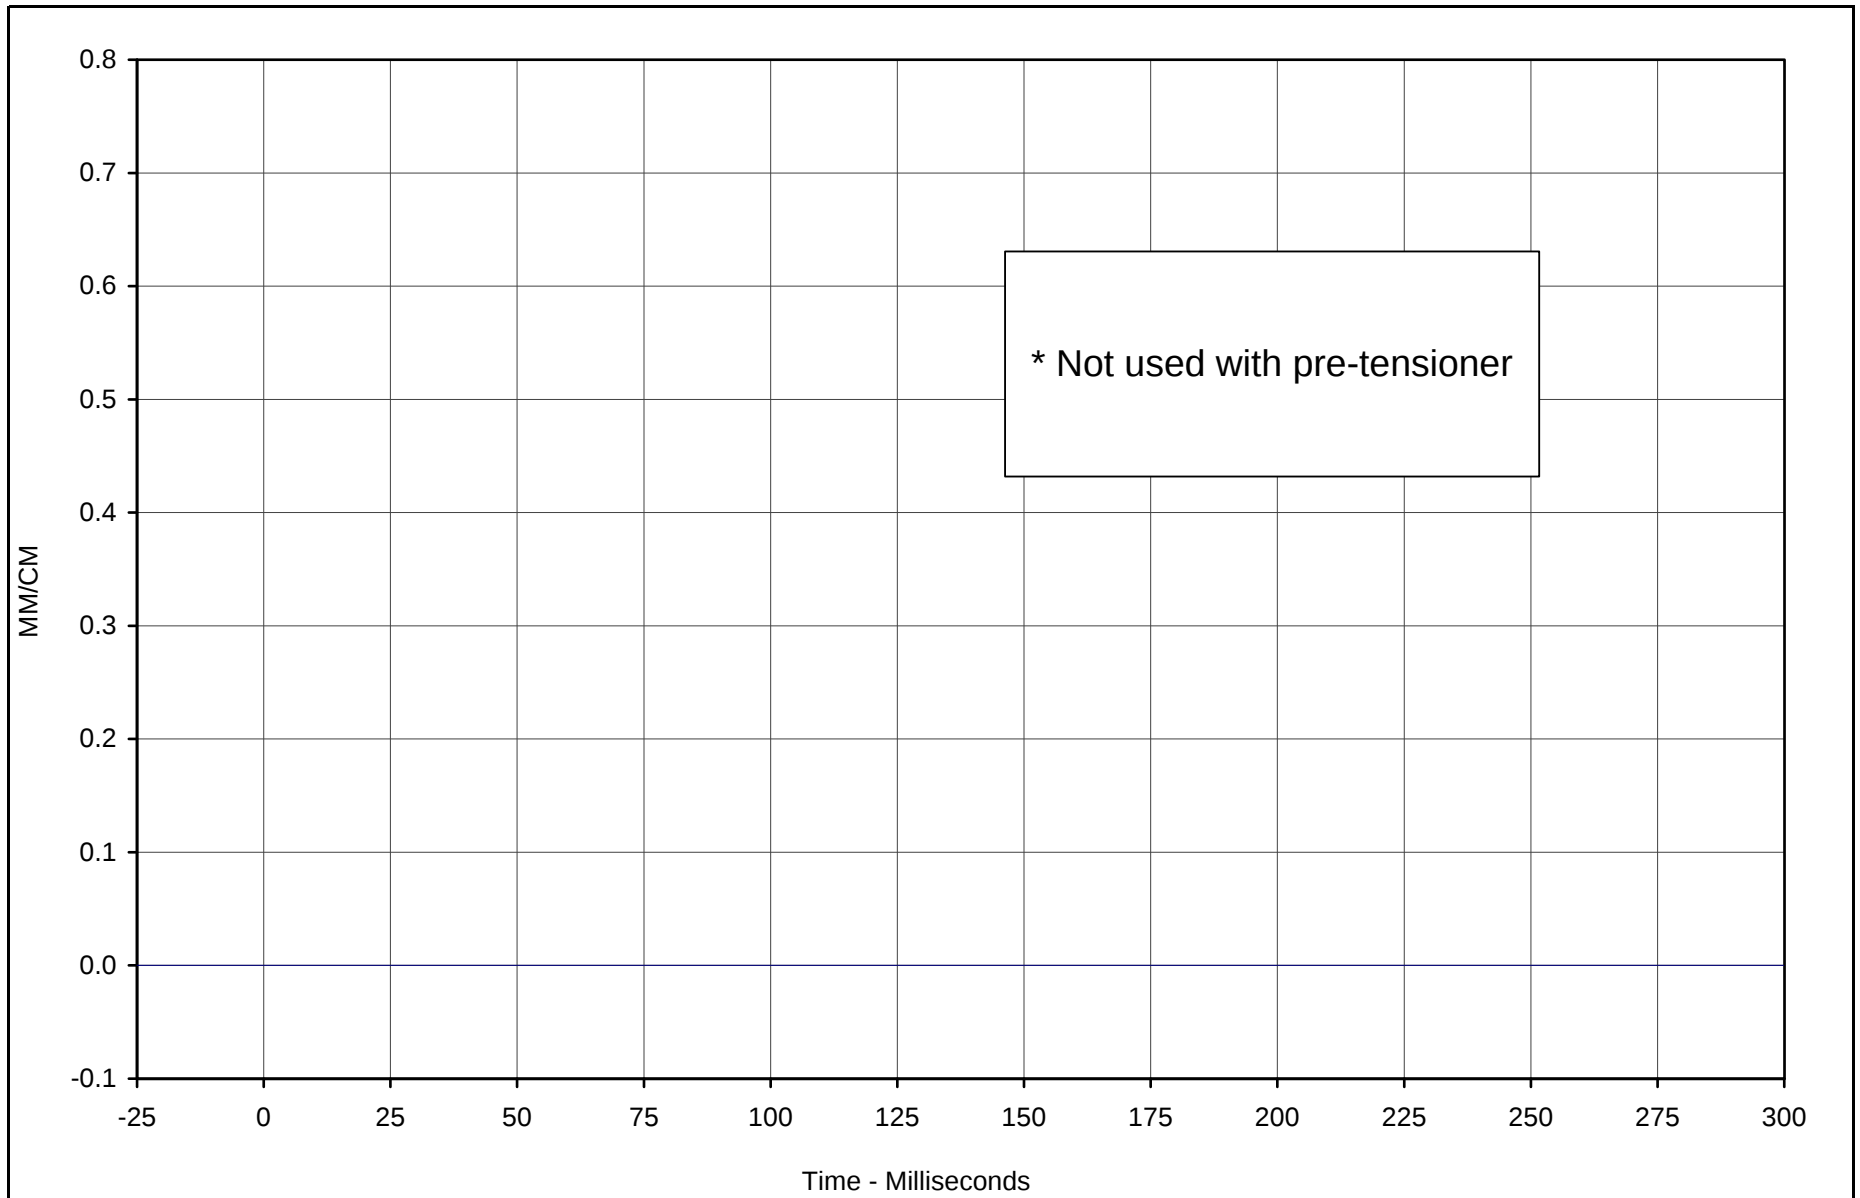

* Not used with pre-tensioner

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Passenger Shoulder Belt Elongation	088	FIL	MM/CM	0.00	0.0	0.00	0.0	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

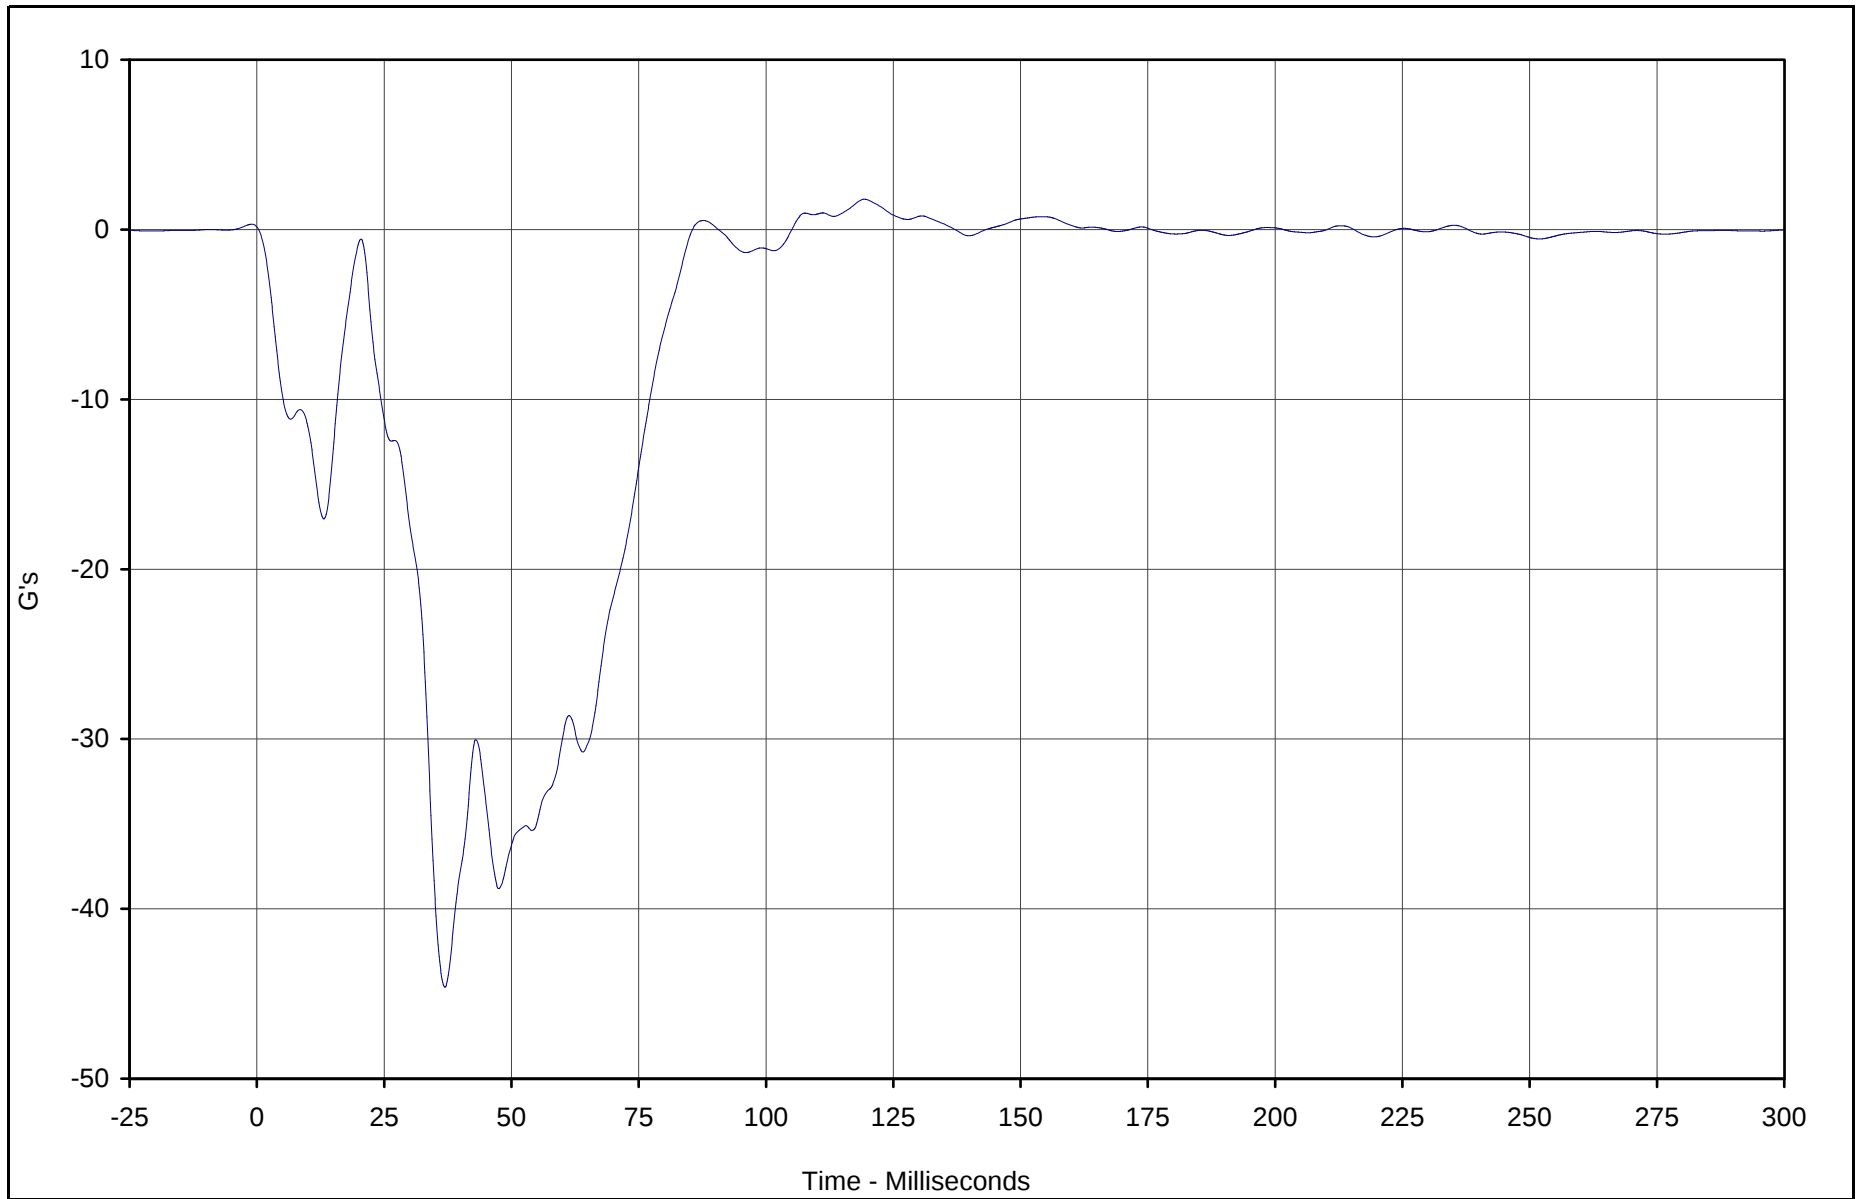

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Left Rear X	089	FIL	G's	1.8	119.3	-44.6	36.9	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

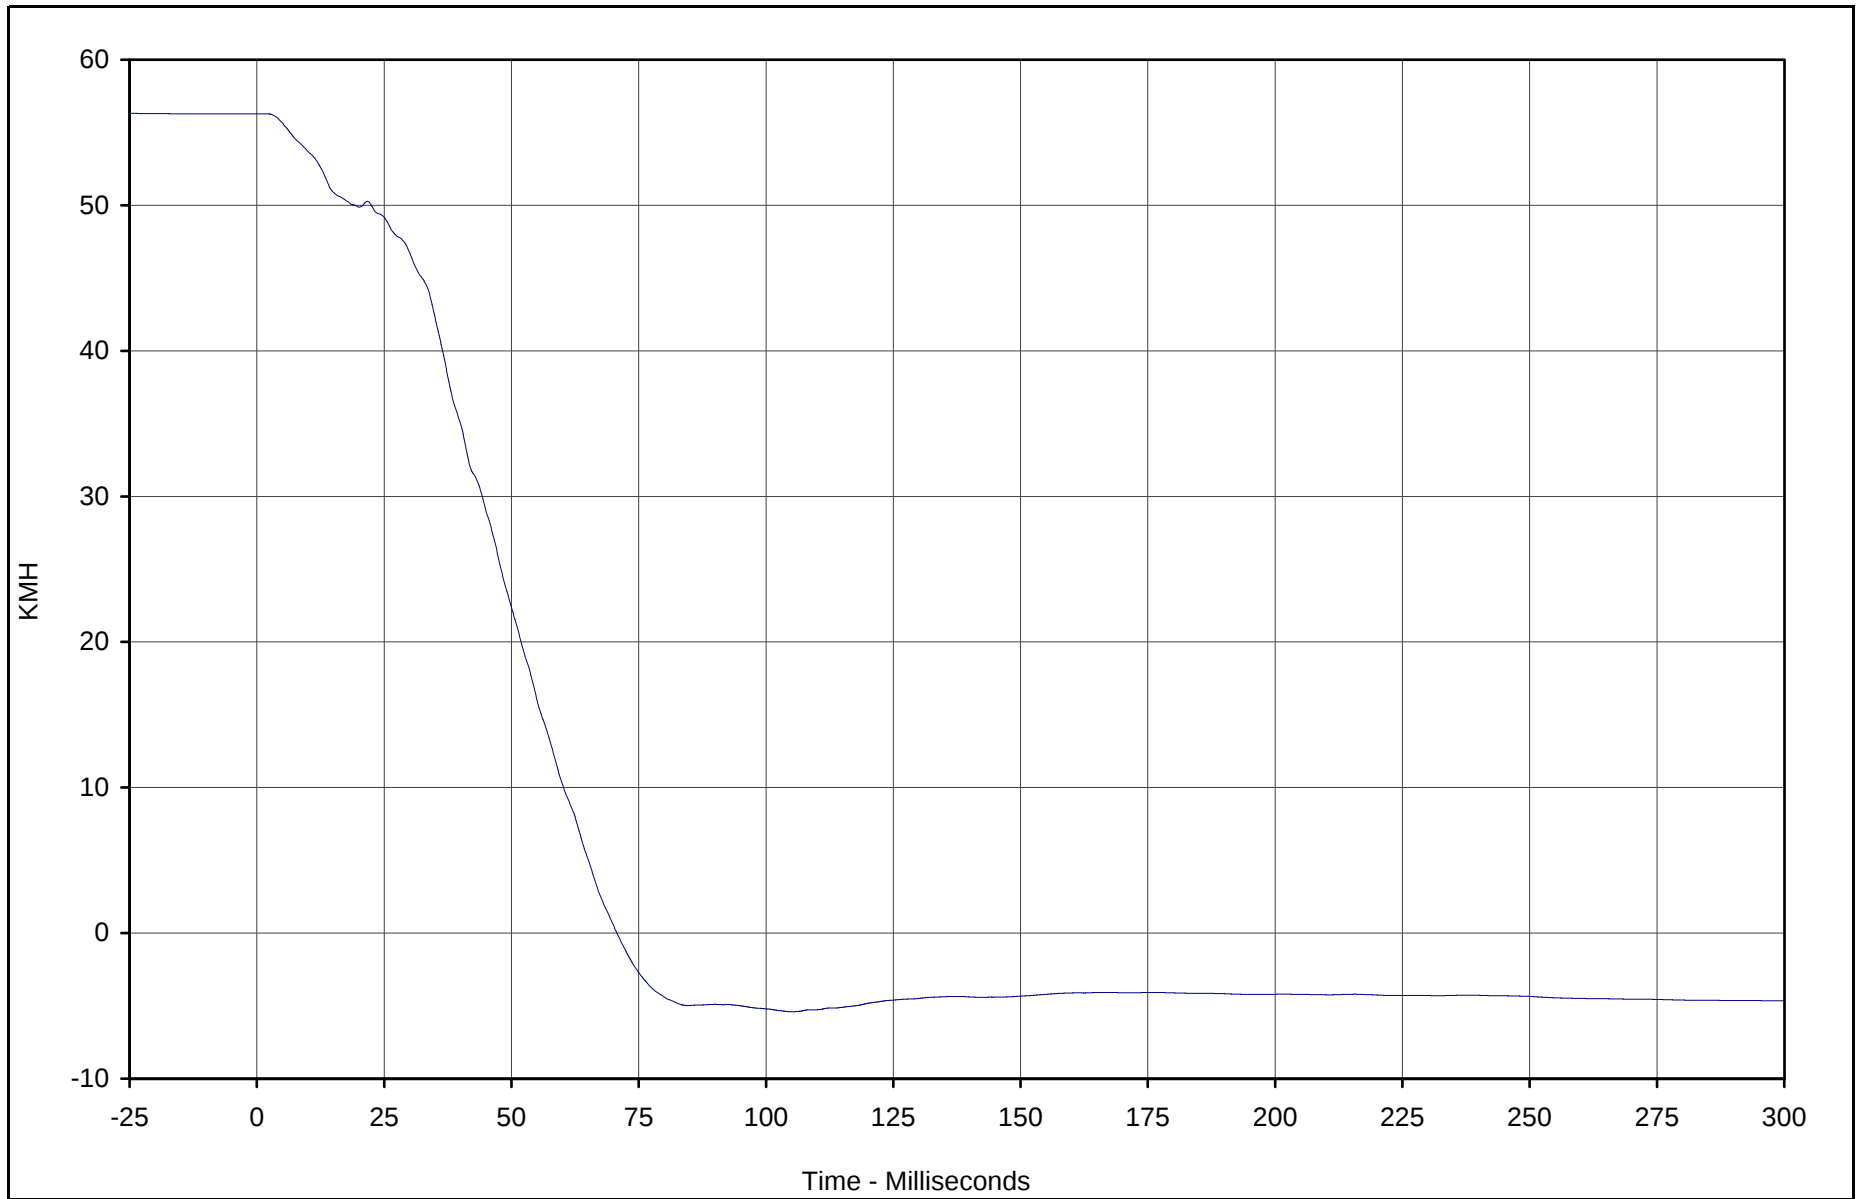

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Left Rear X Velocity	089	IN1	KMH	56.3	2.0	-5.4	105.3	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

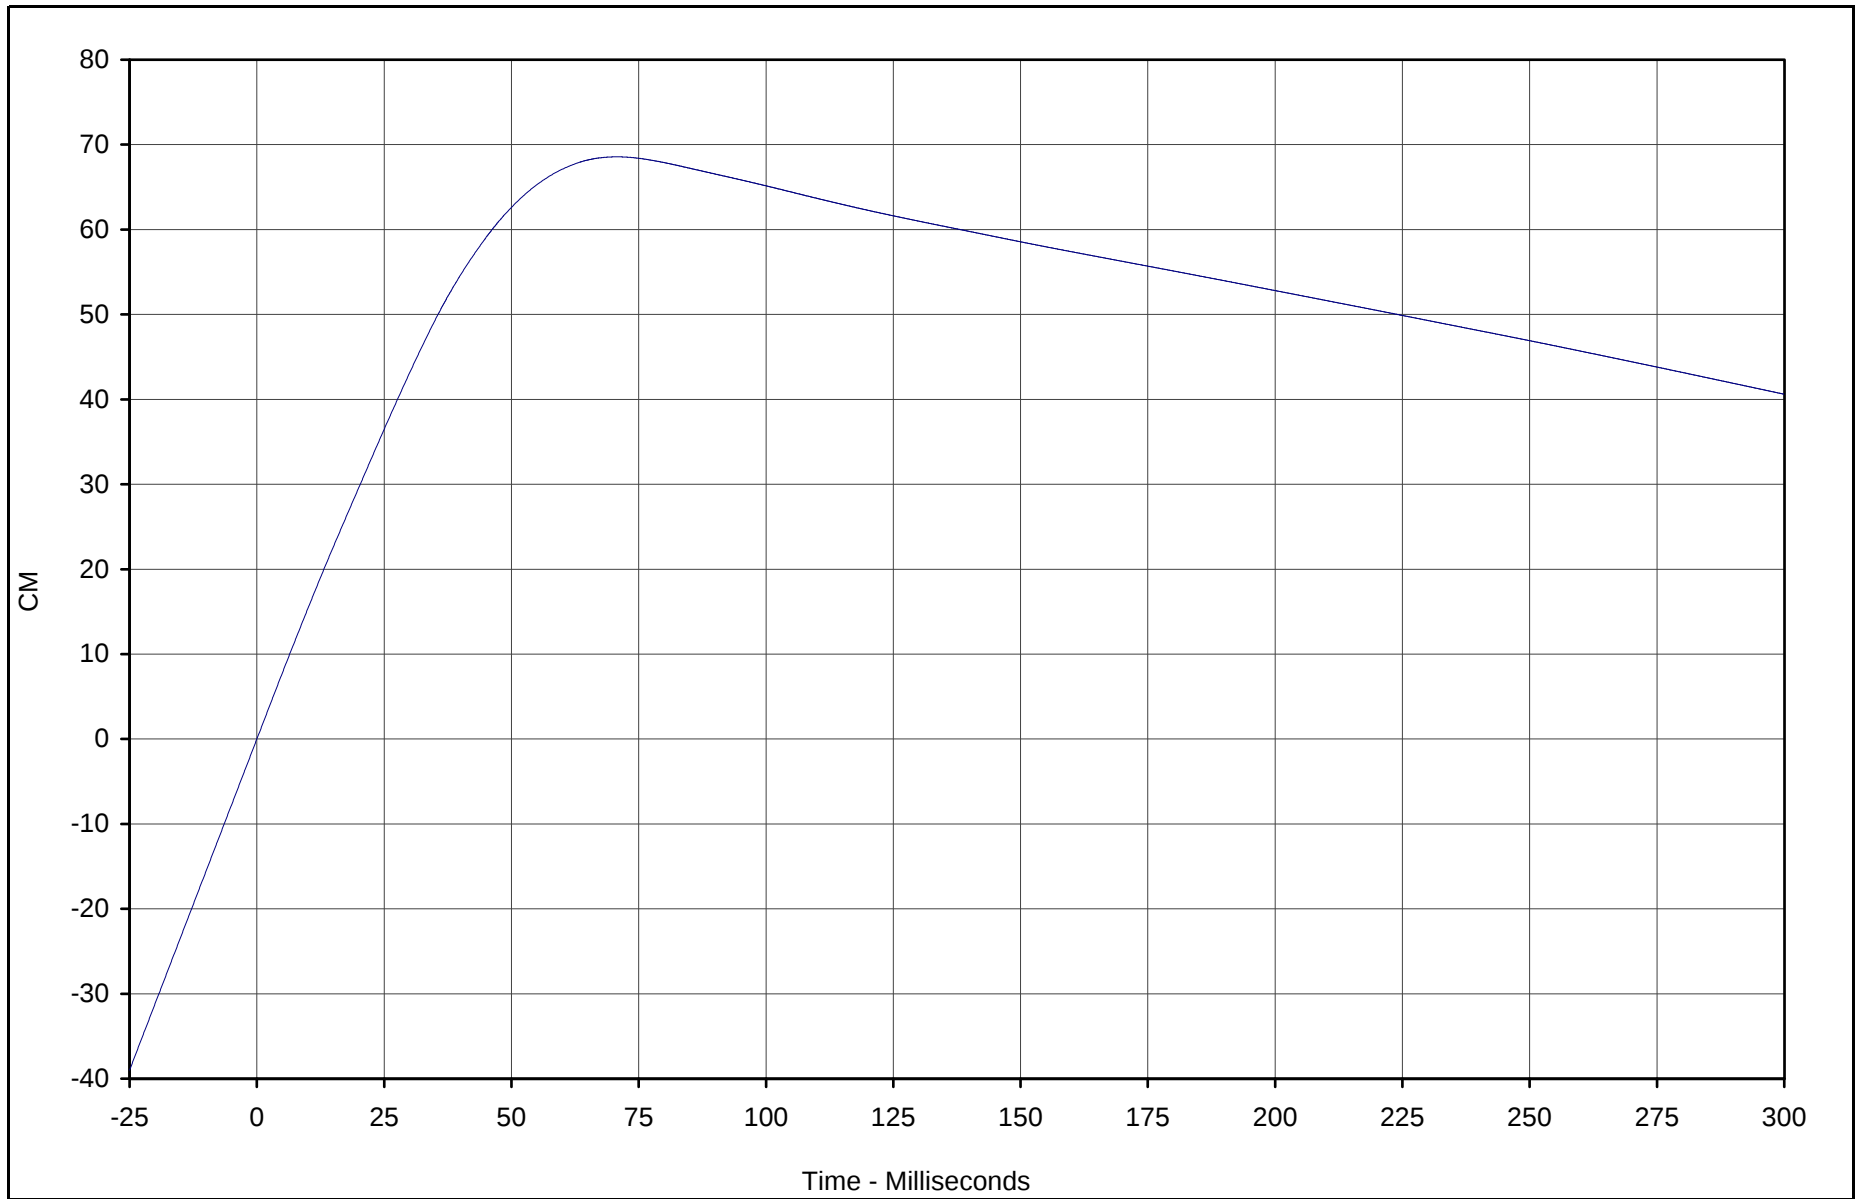

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Left Rear X Displ.	089	IN2	CM	68.6	70.7	0.0	0.0	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

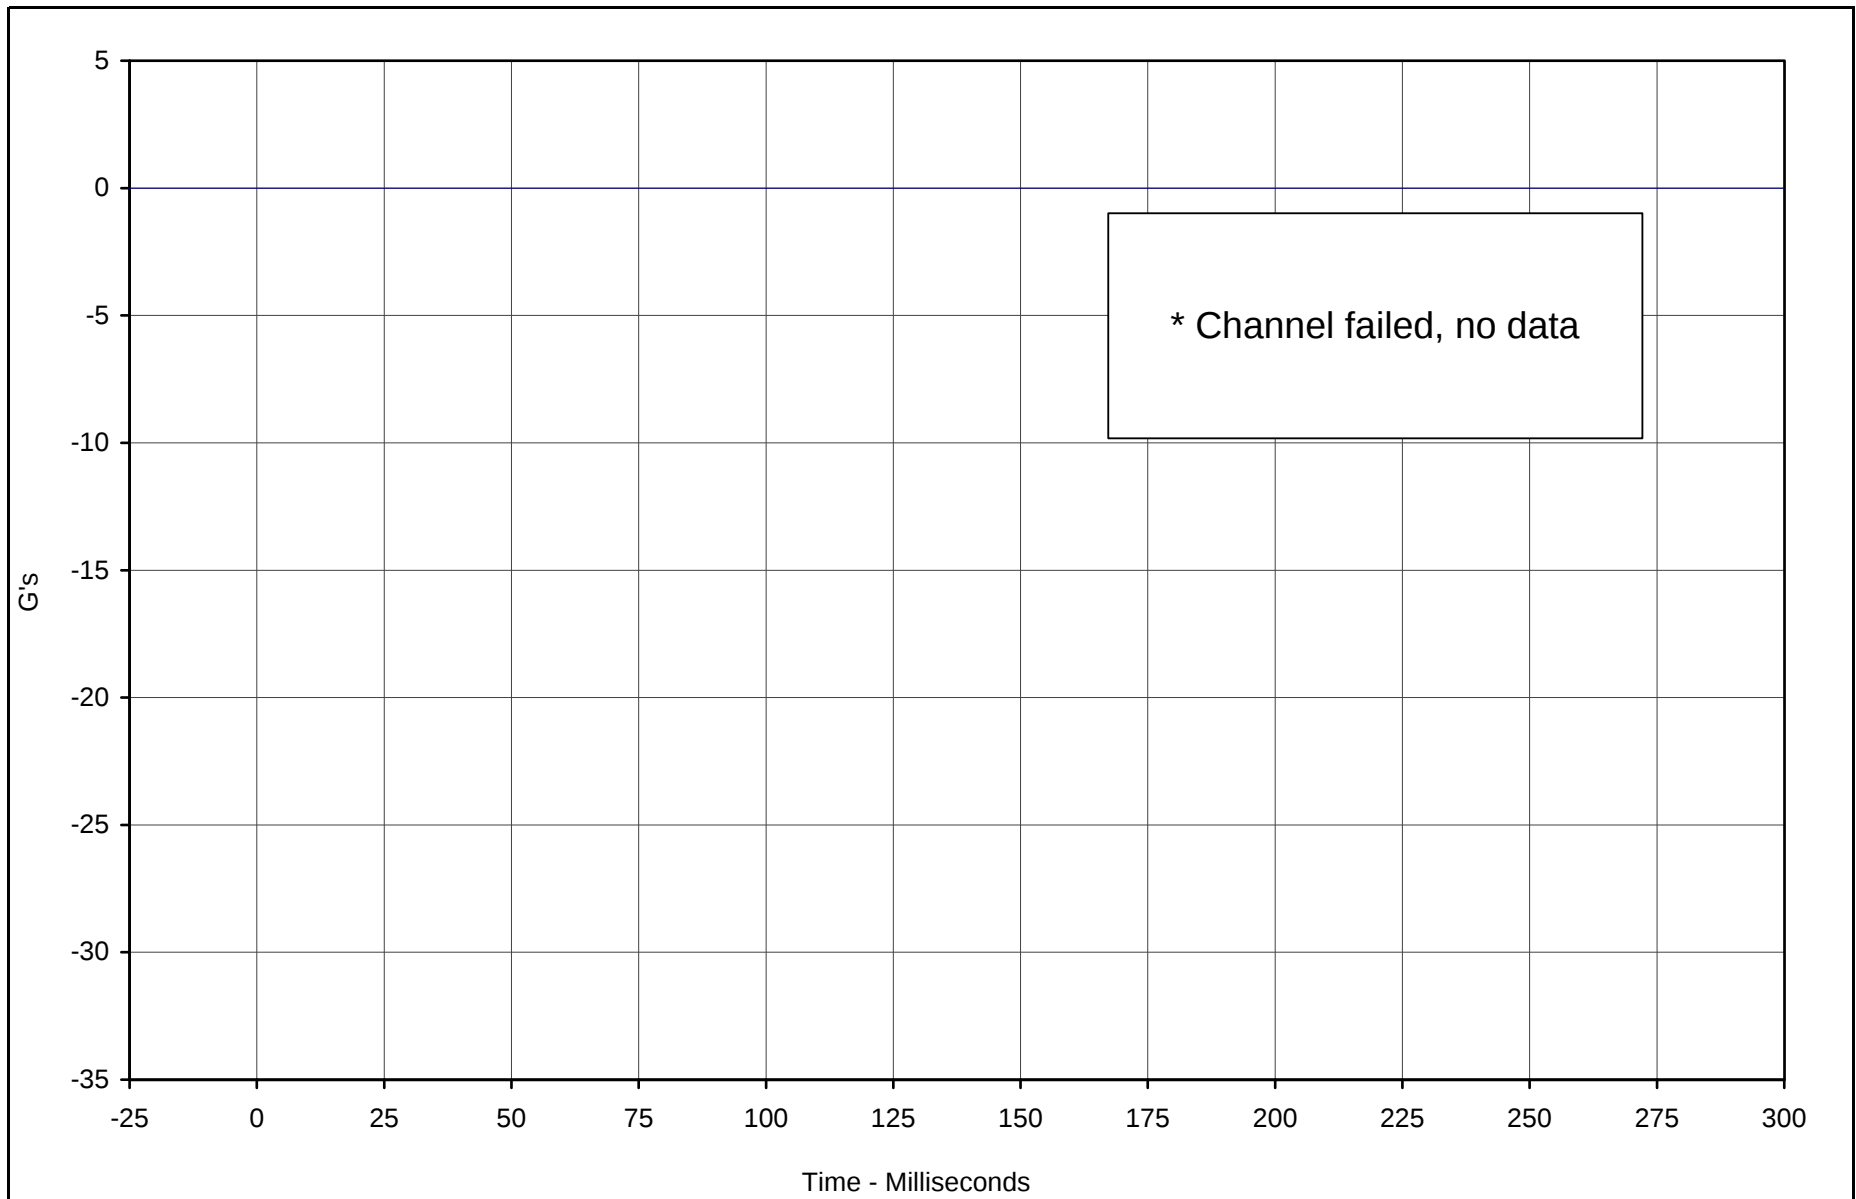

* Channel failed, no data

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Right Rear X	090	FIL	G's	0.0	0.0	0.0	0.0	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

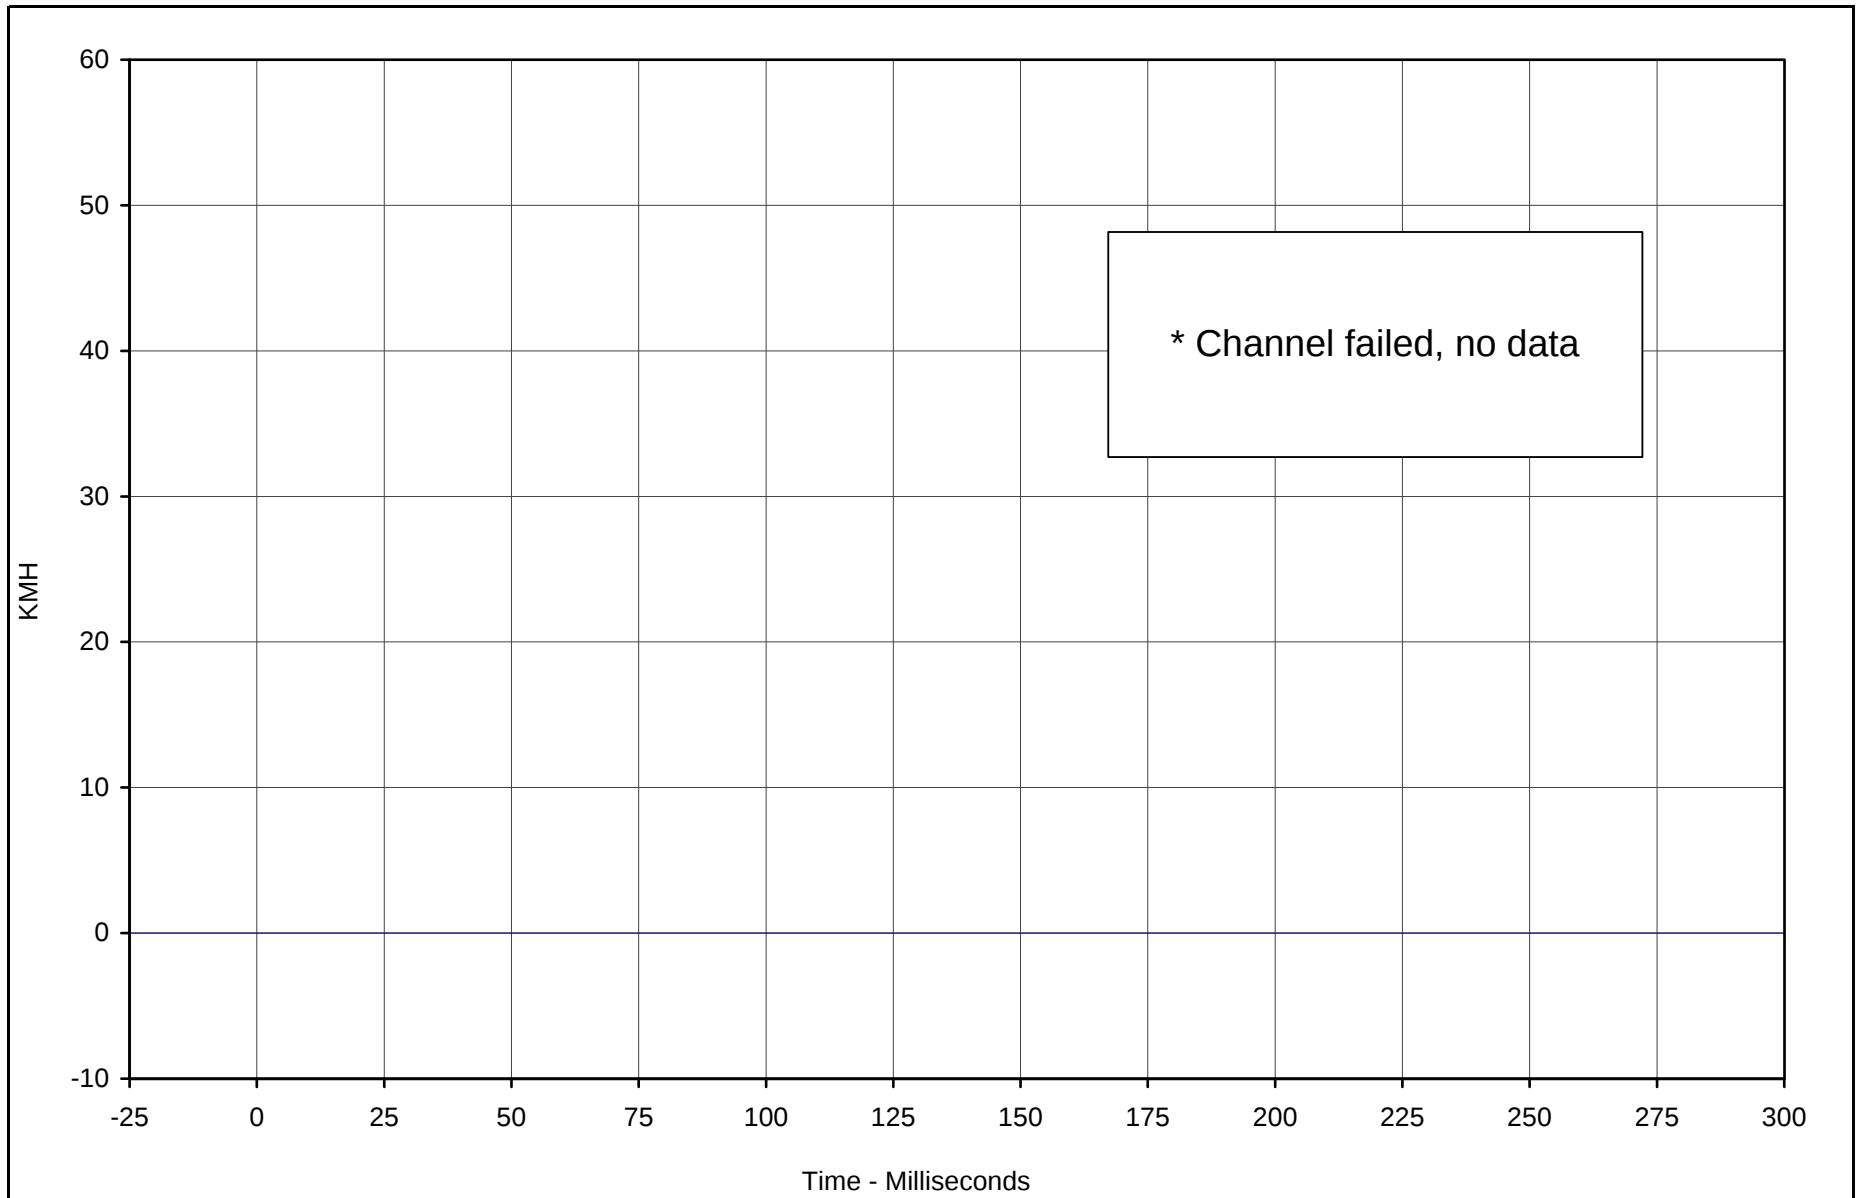

* Channel failed, no data

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Right Rear X Velocity	090	IN1	KMH	0.0	0.0	0.0	0.0	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

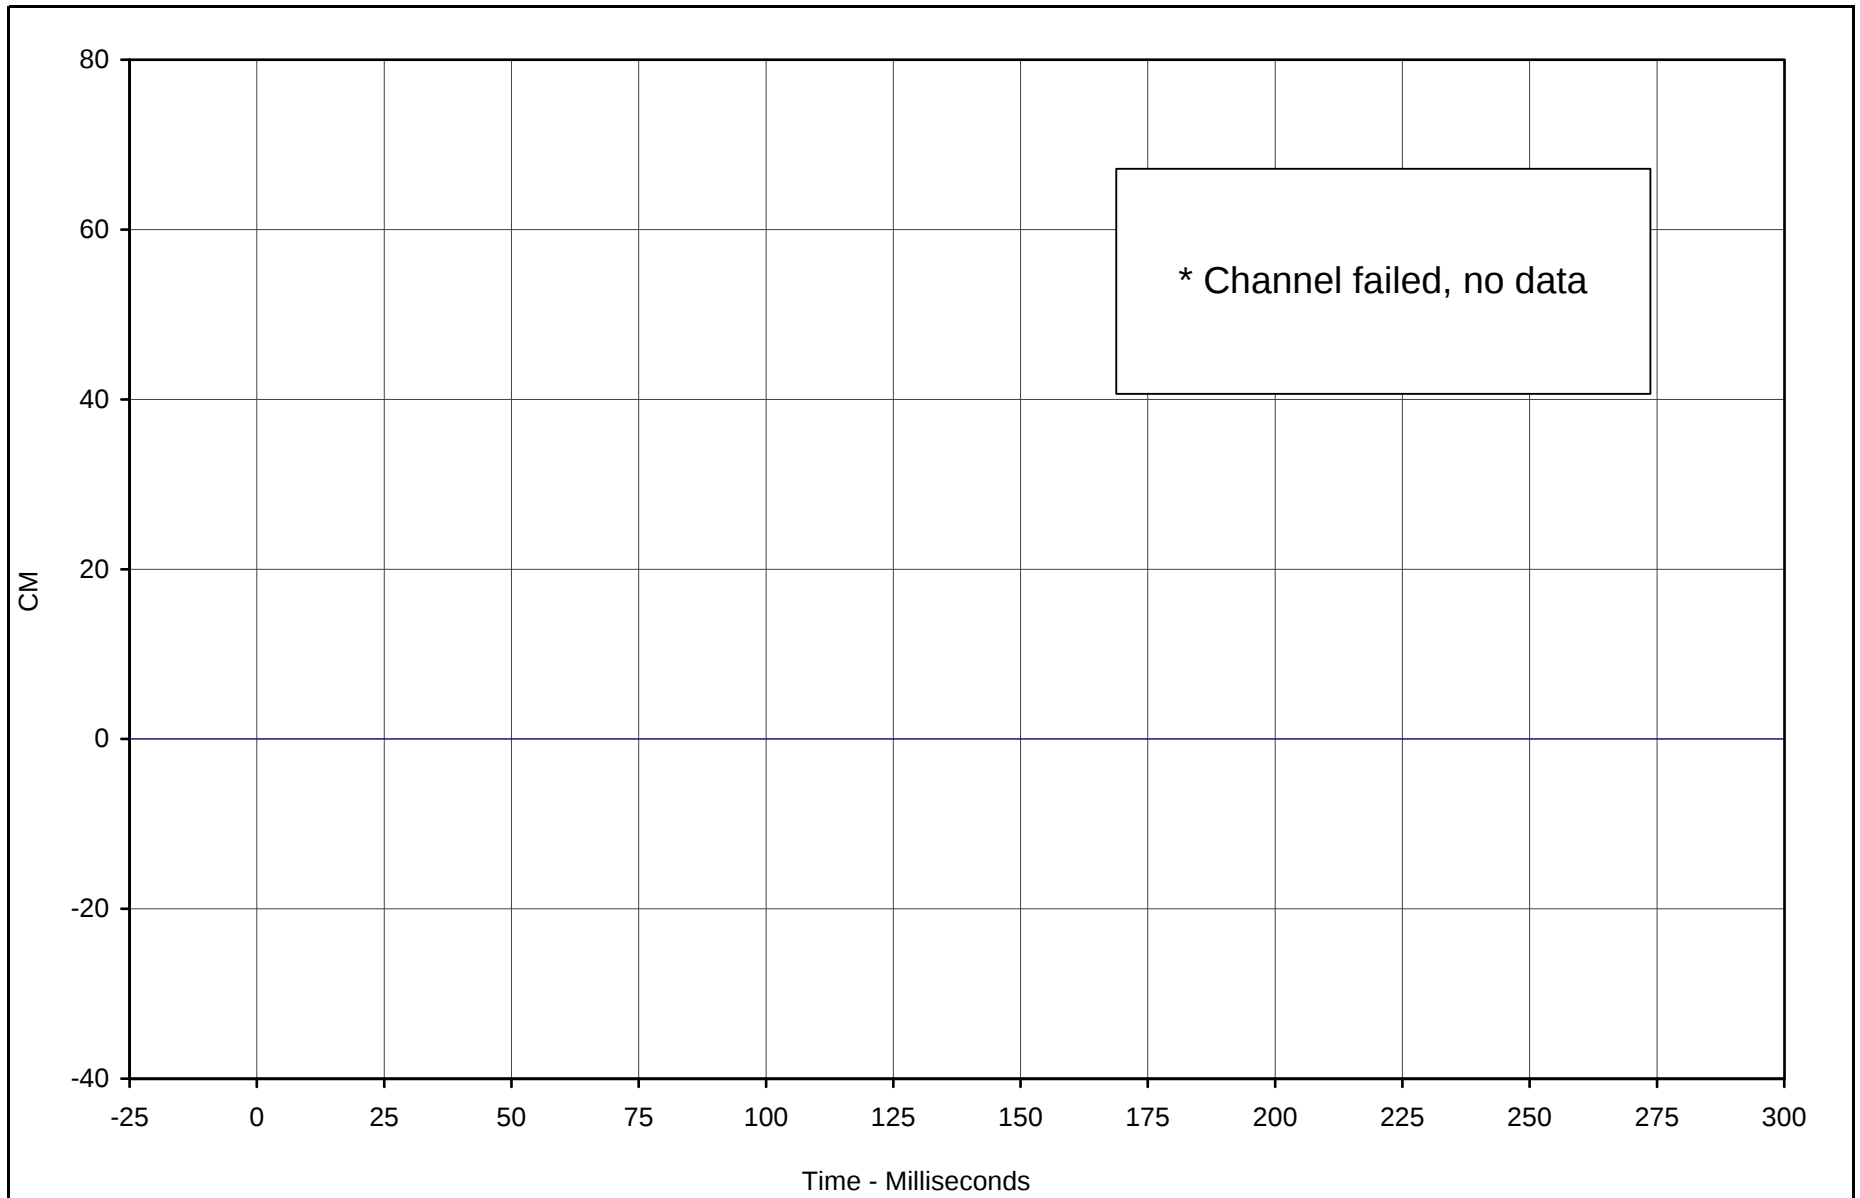

* Channel failed, no data

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Right Rear X Displ.	090	IN2	CM	0.0	0.0	0.0	0.0	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

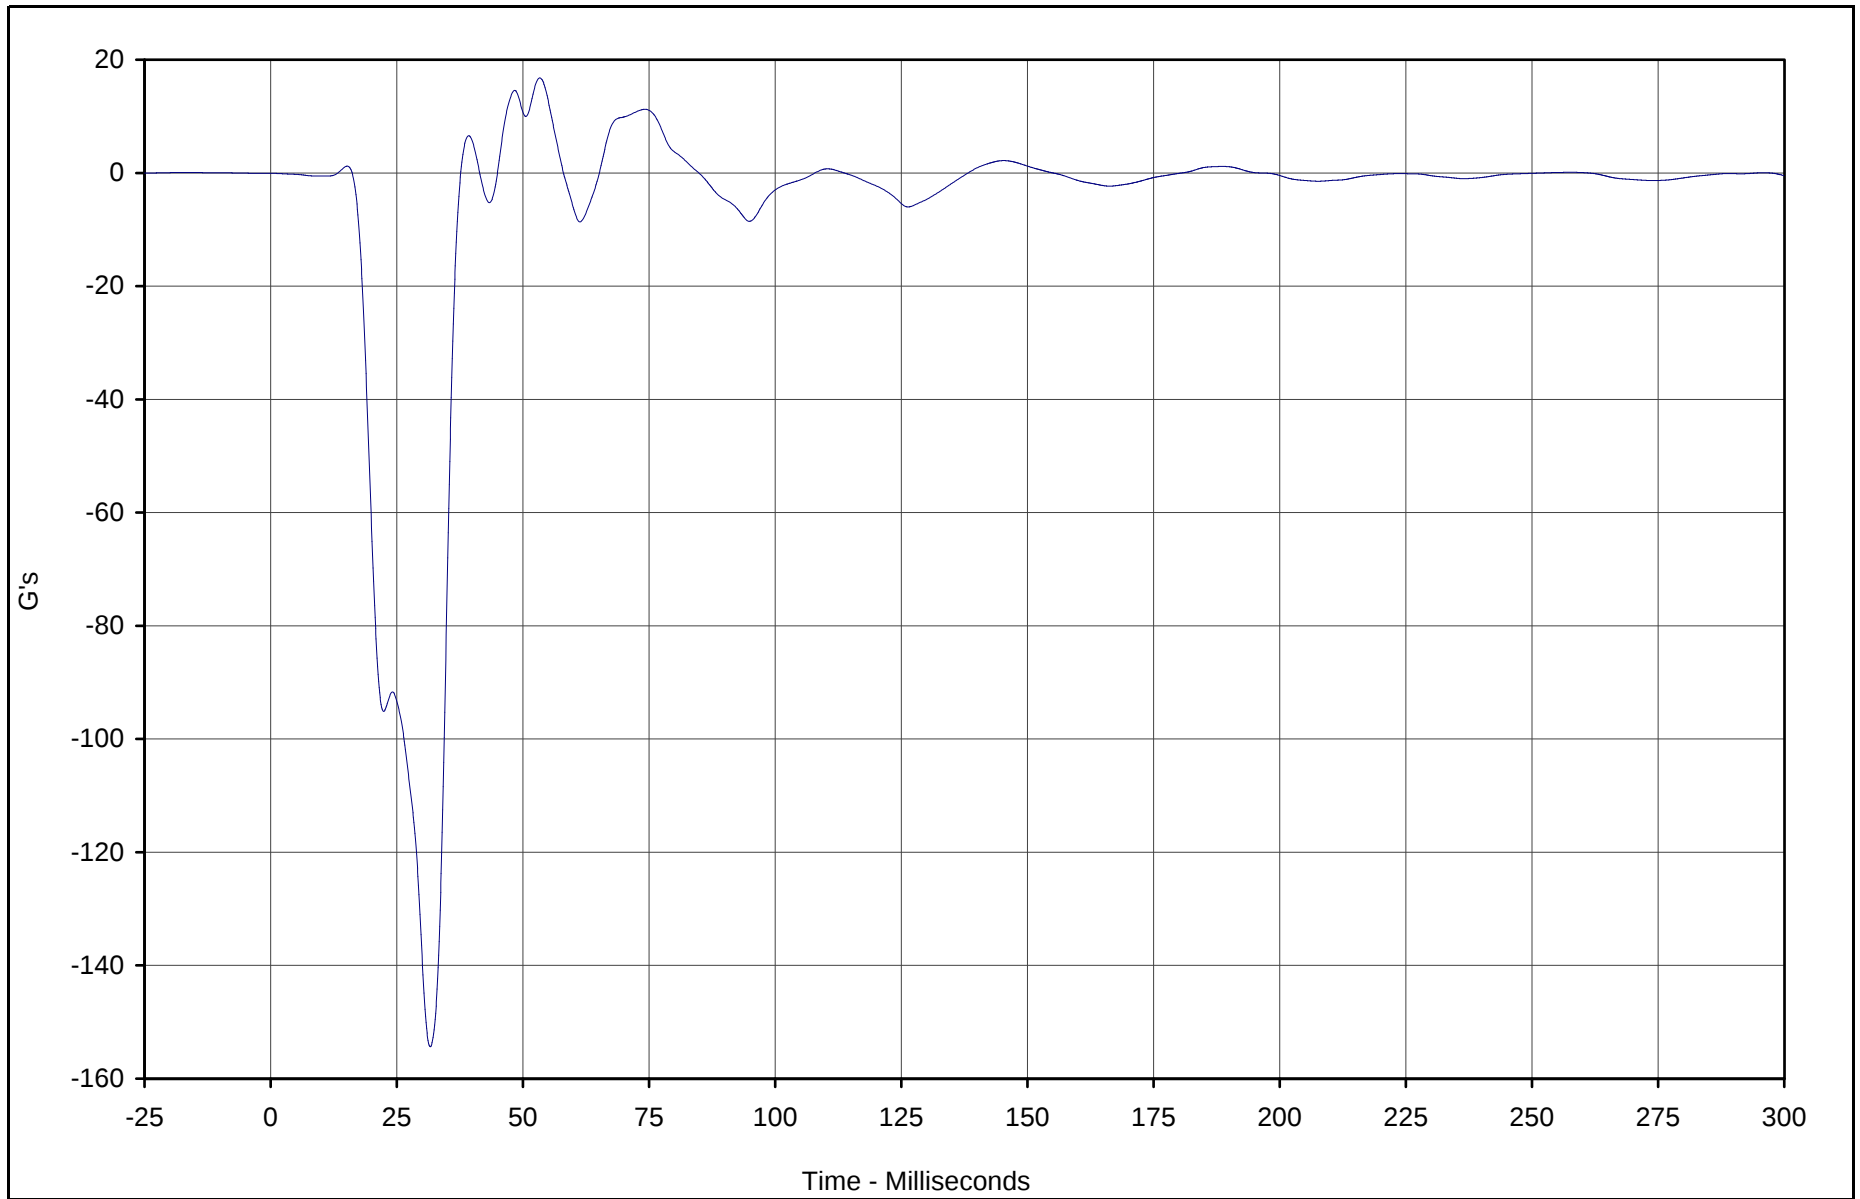

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Engine Top	091	FIL	G's	16.8	53.3	-154.3	31.6	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

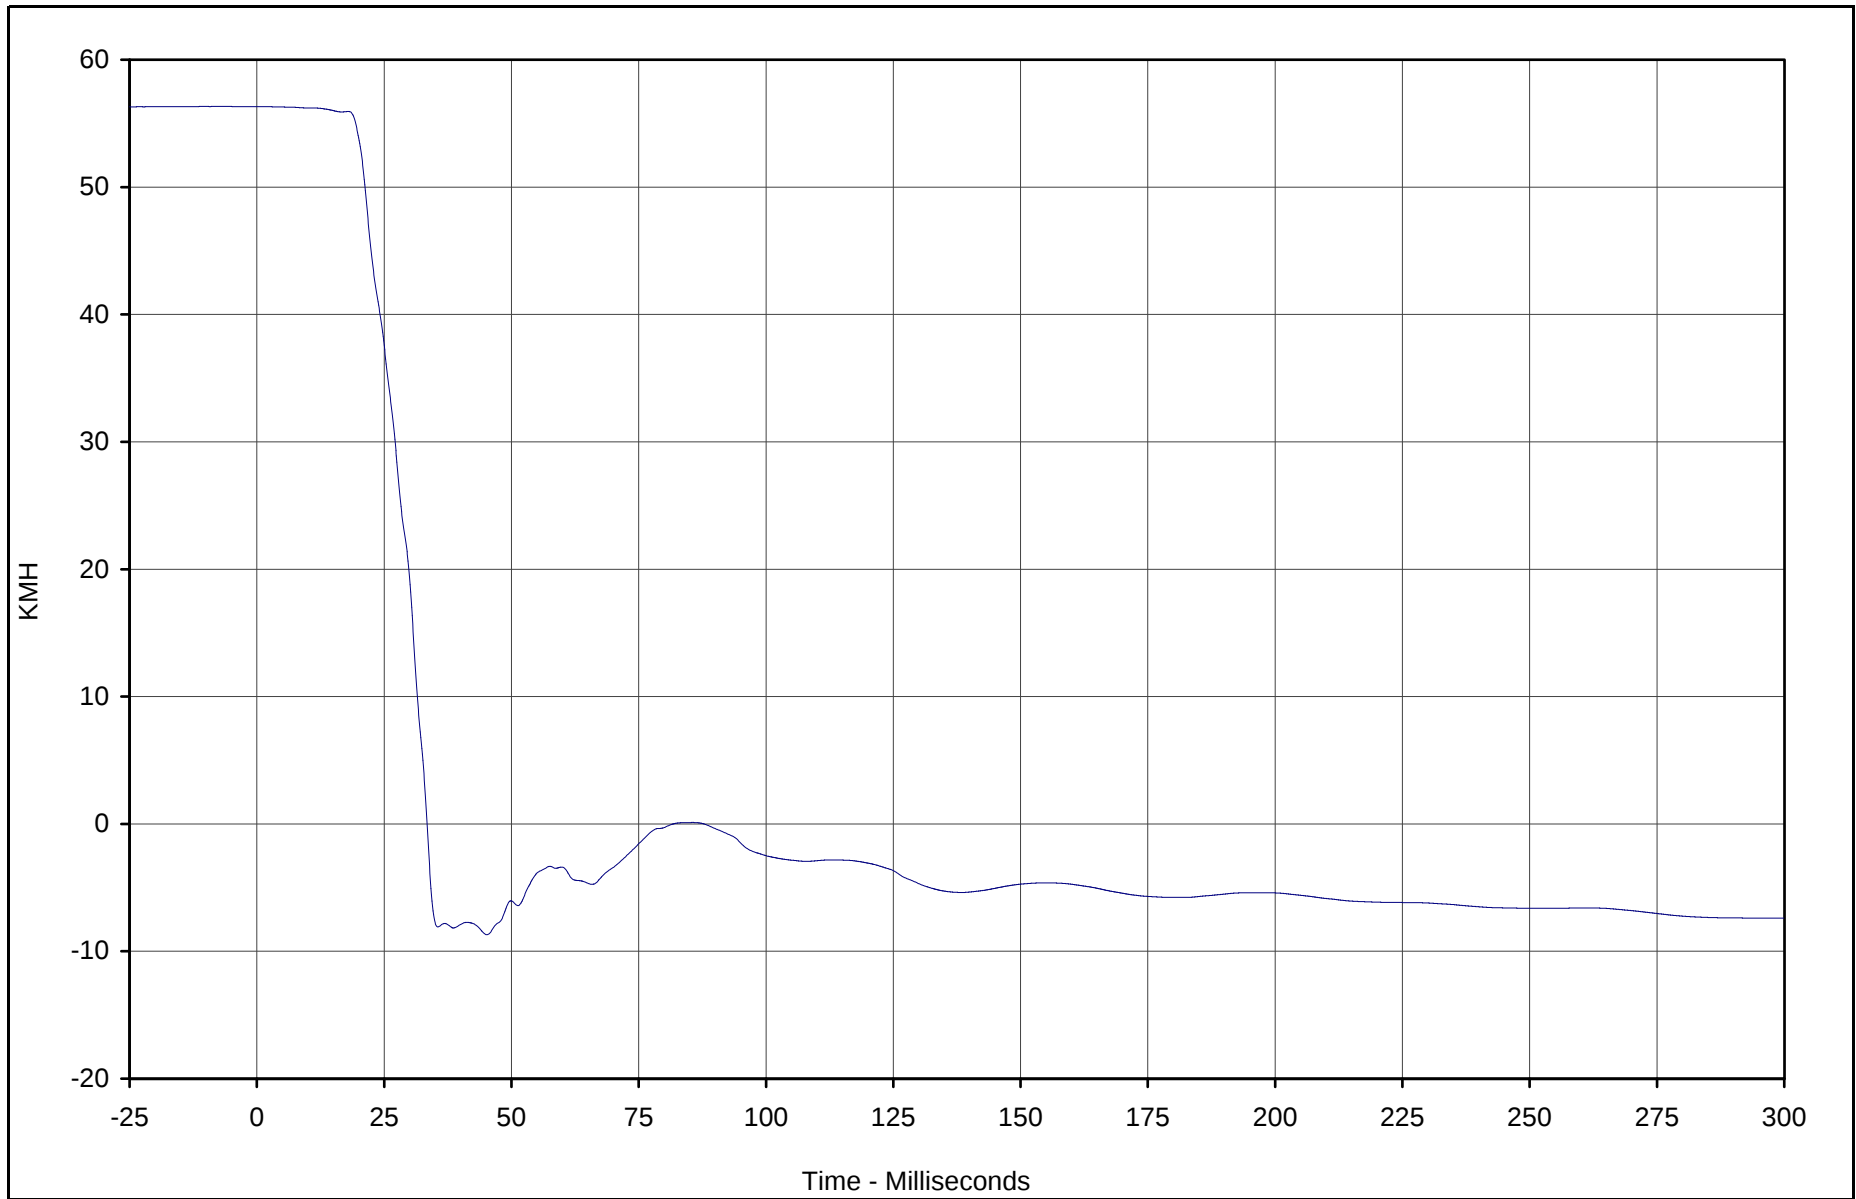

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Engine Top Velocity	091	IN1	KMH	56.3	0.6	-8.7	45.2	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

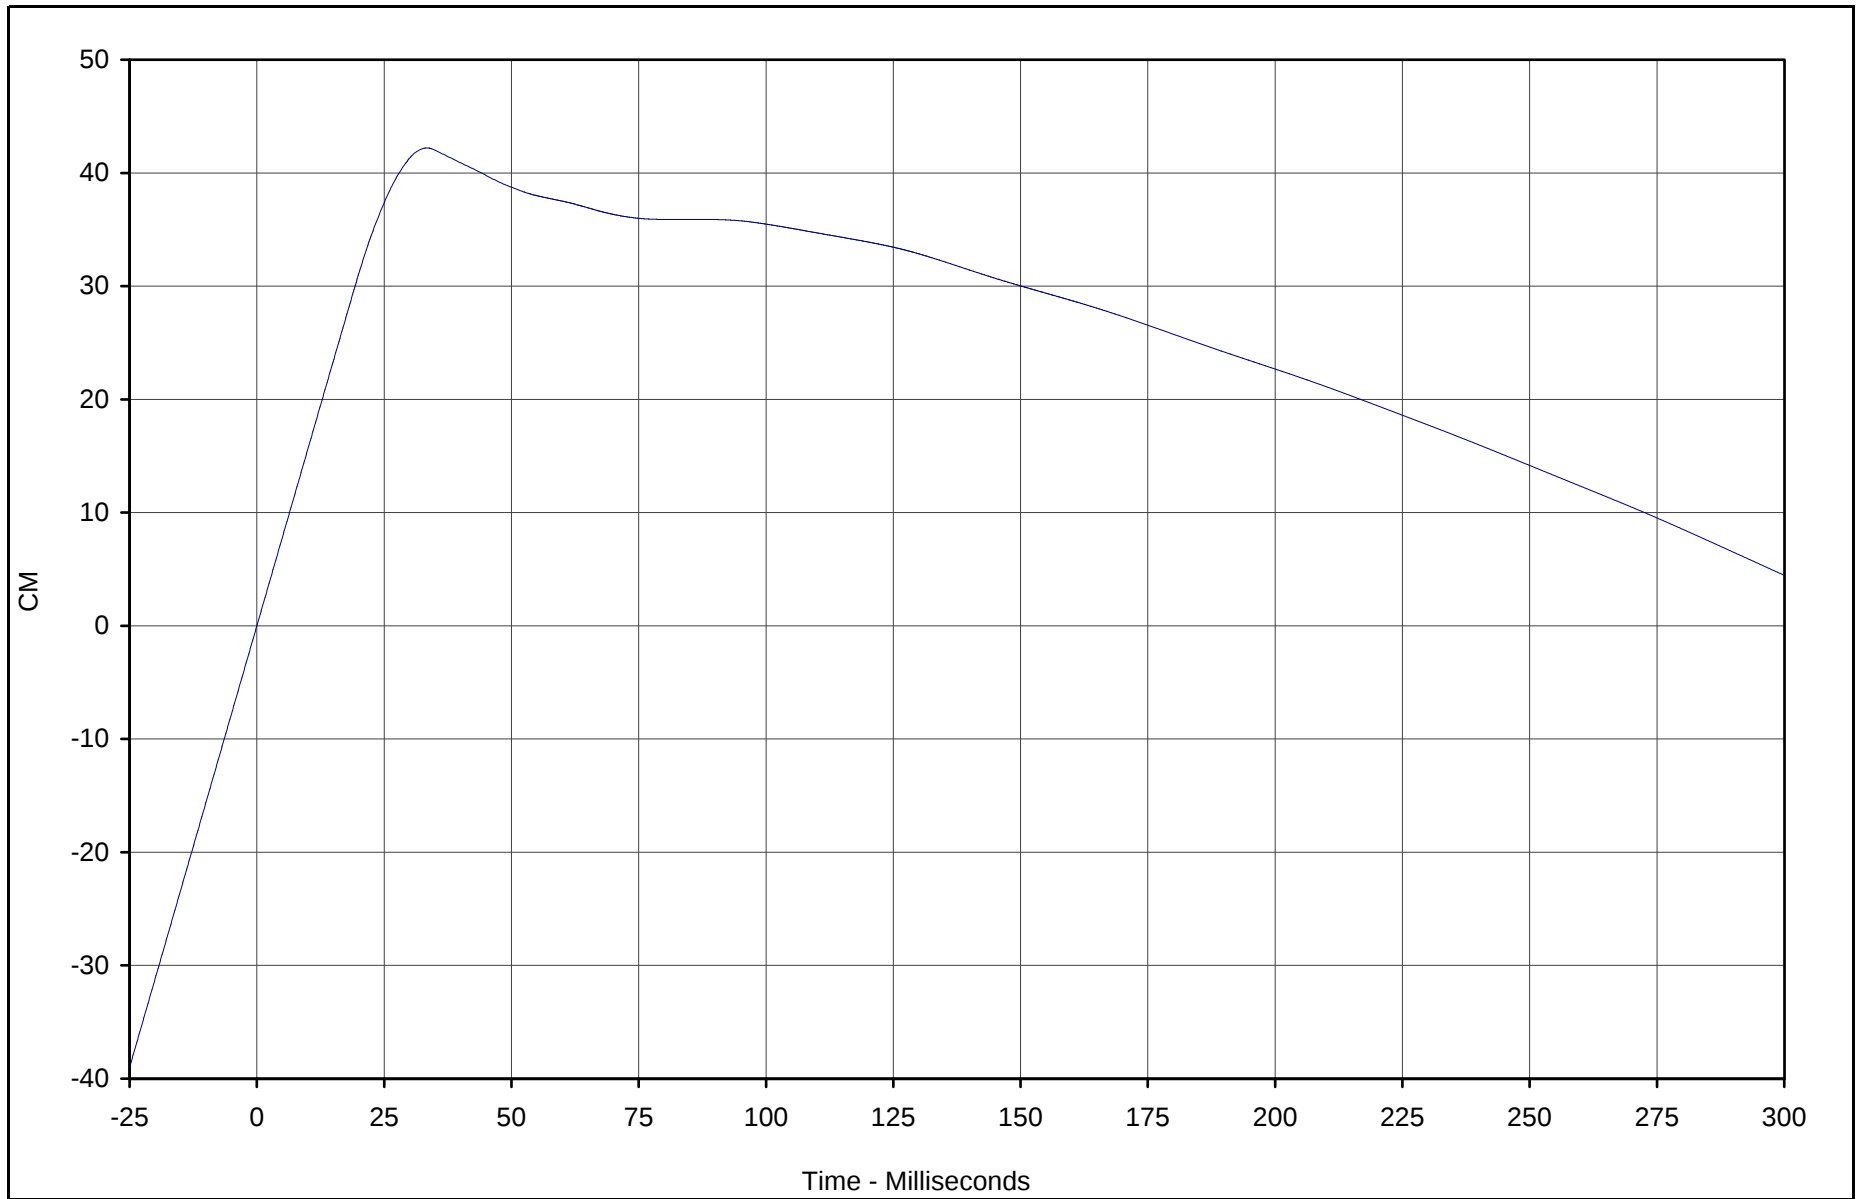

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Engine Top Displacement	091	IN2	CM	42.2	33.4	0.0	0.0	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

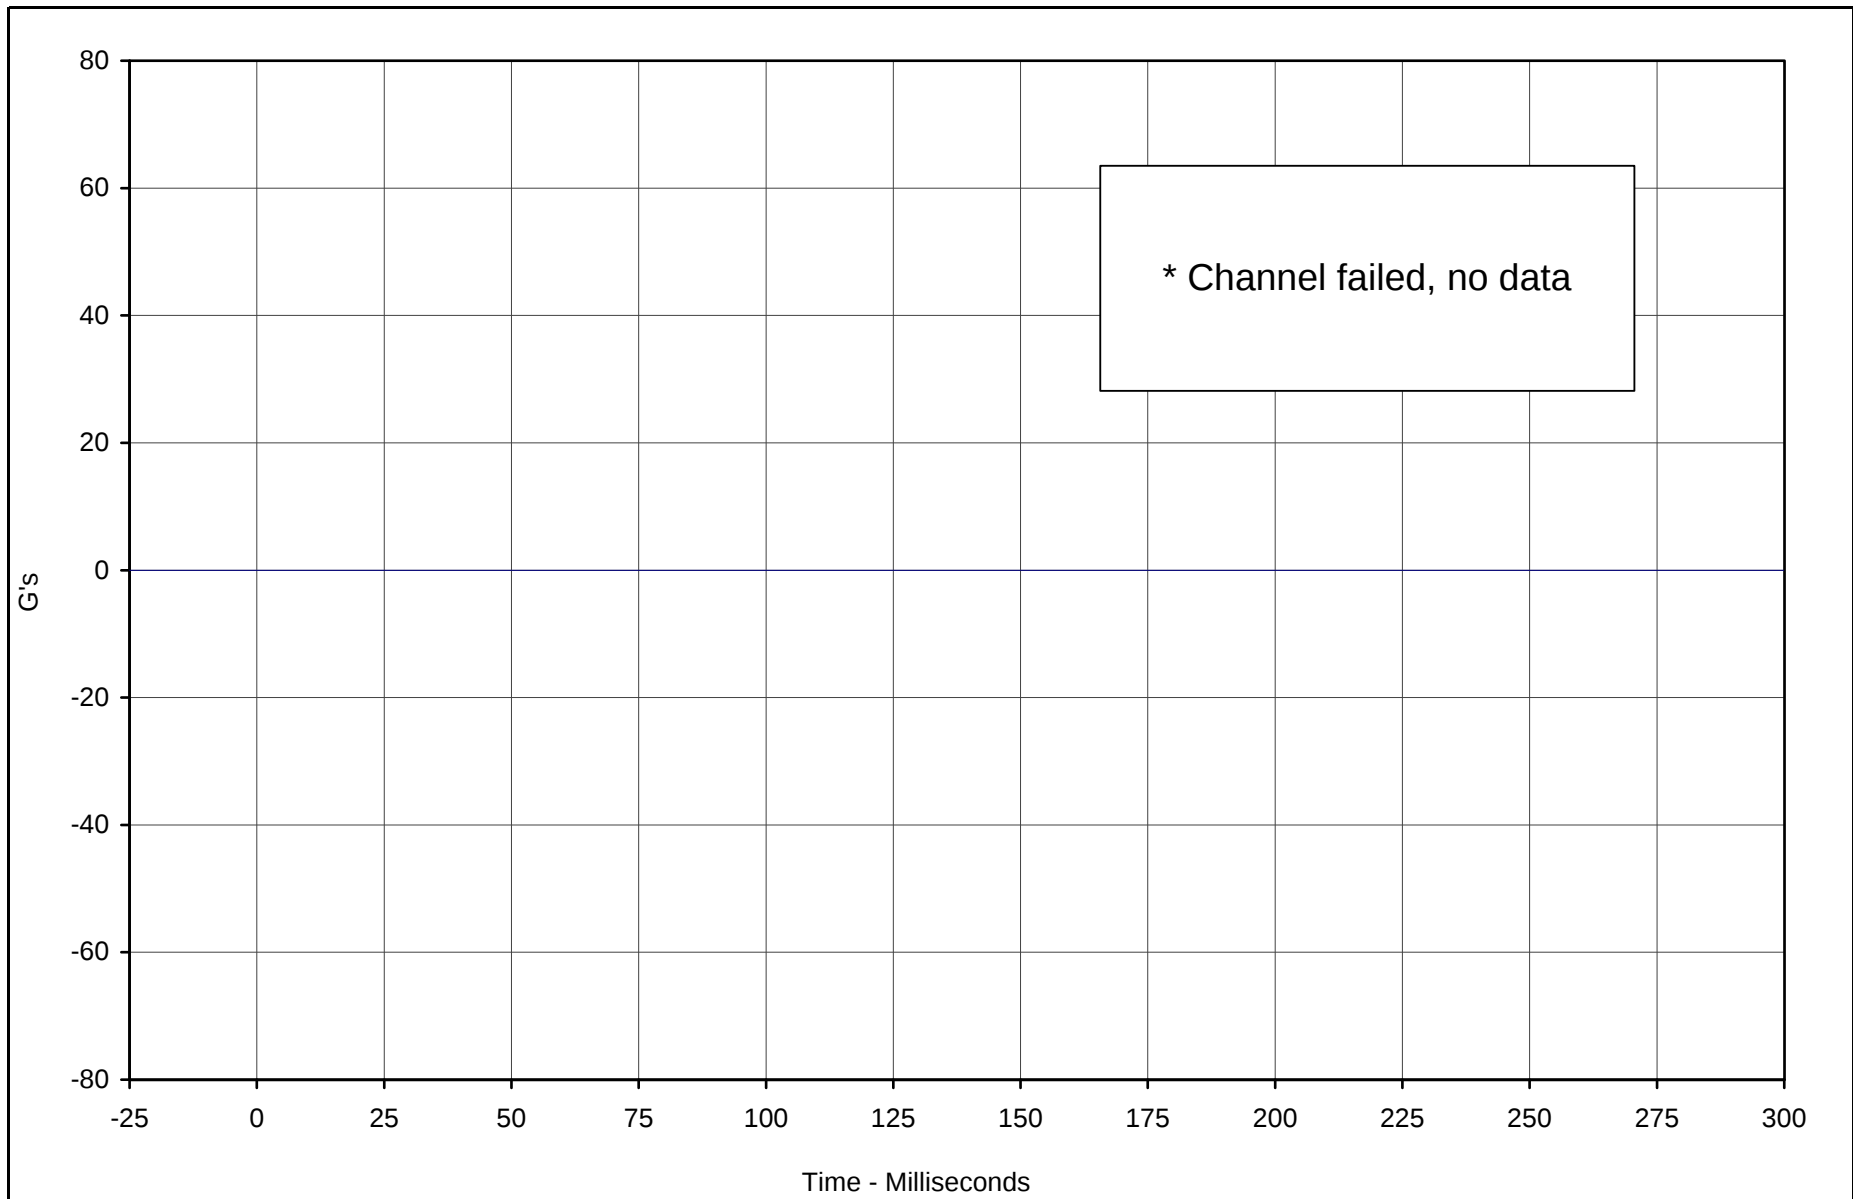

* Channel failed, no data

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Engine Bottom	092	FIL	G's	0.0	0.0	0.0	0.0	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

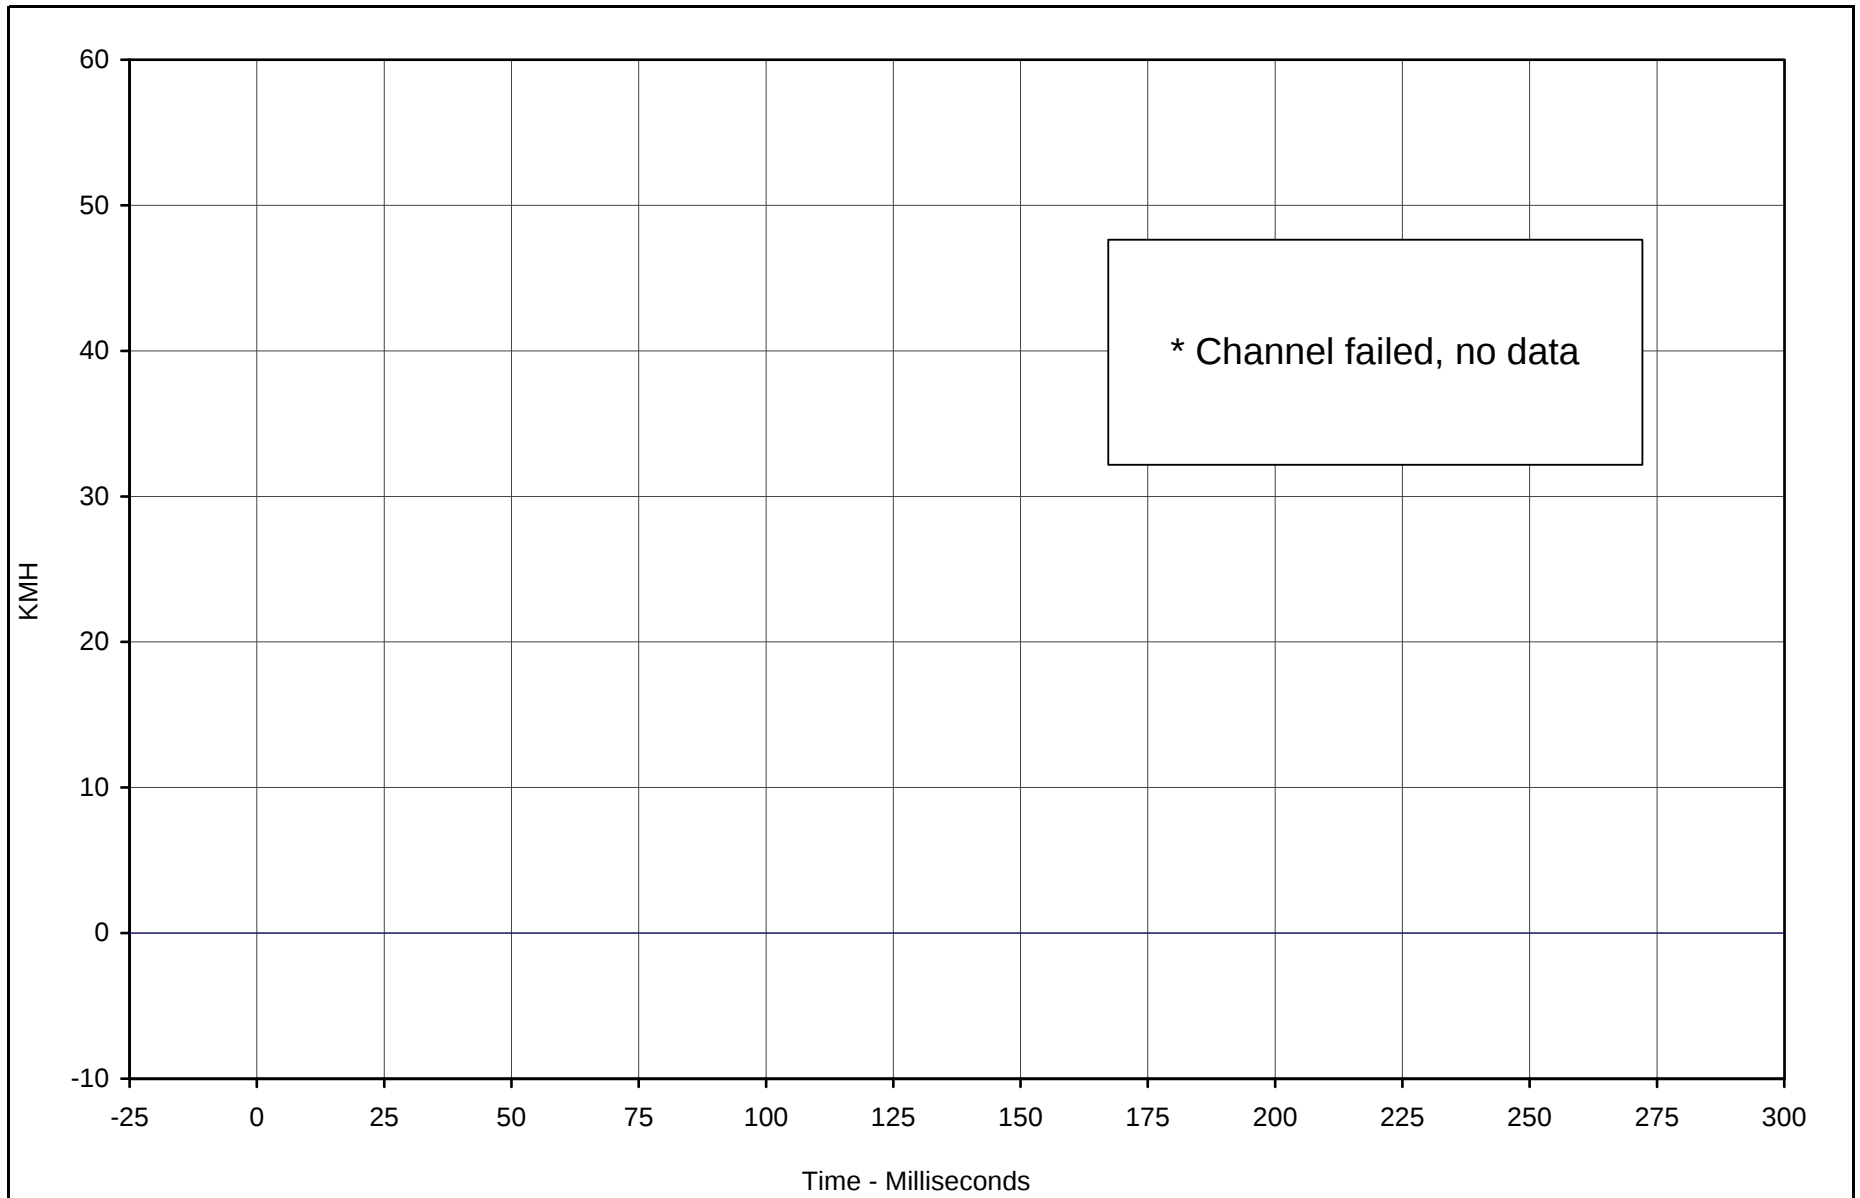

* Channel failed, no data

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Engine Bottom Velocity	092	IN1	KMH	0.0	0.0	0.0	0.0	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

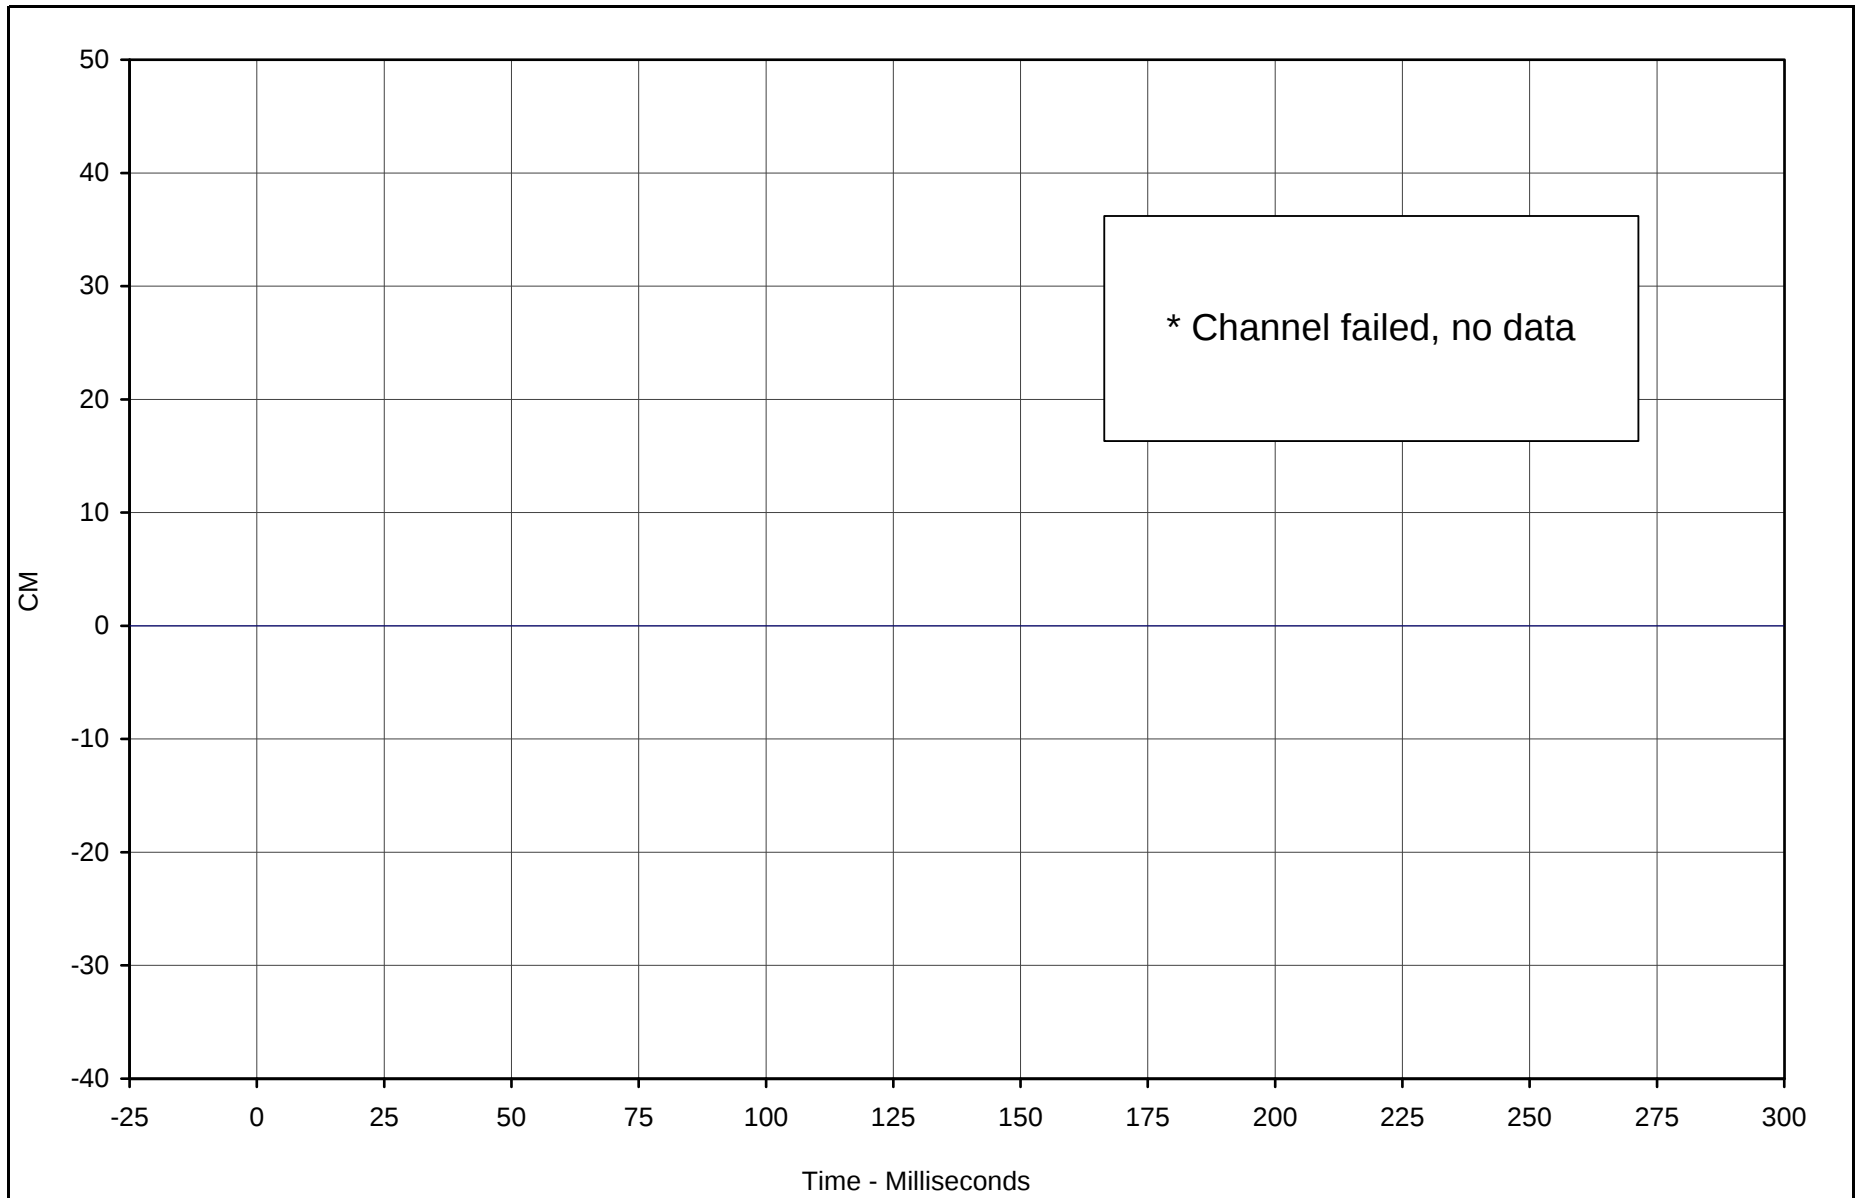

* Channel failed, no data

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Engine Bottom Displacement	092	IN2	CM	0.0	0.0	0.0	0.0	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

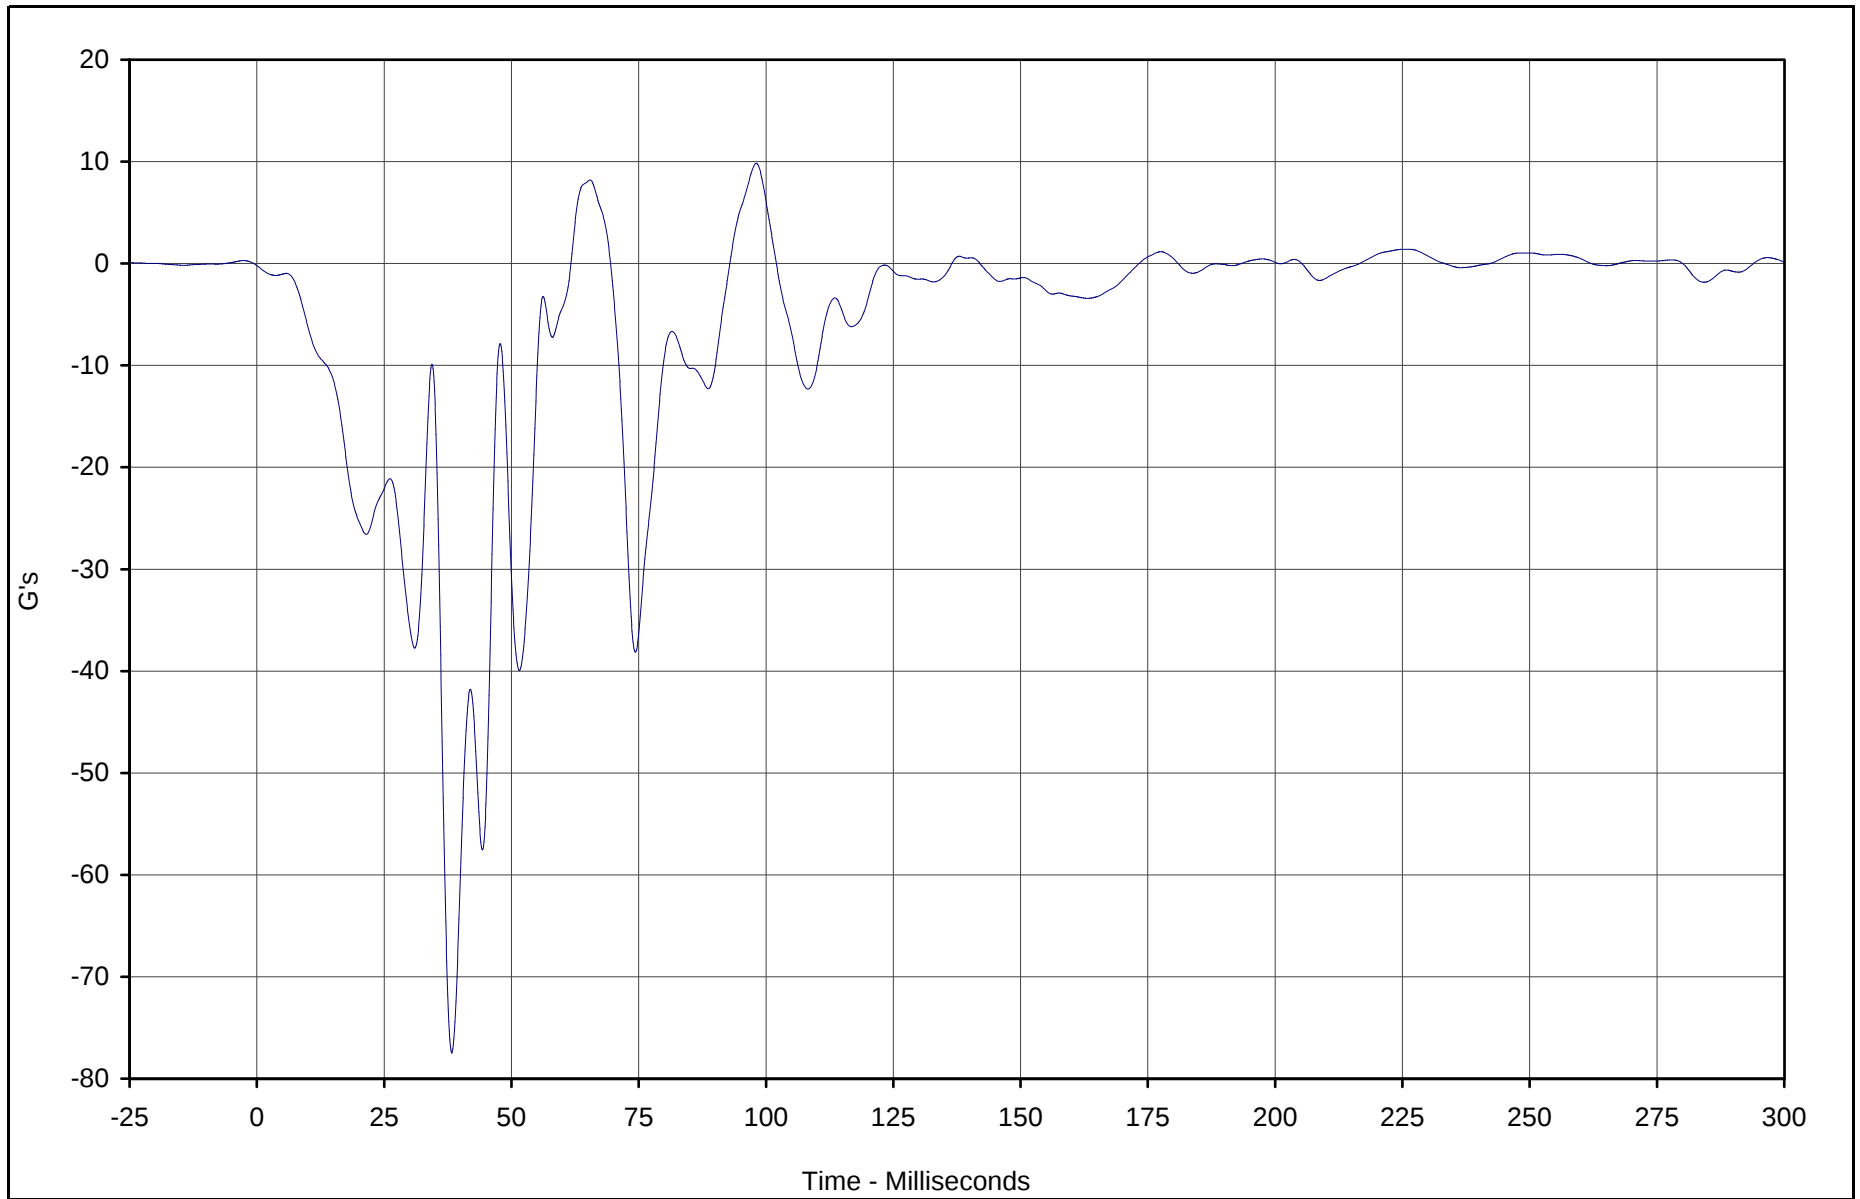

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Left Brake Caliper	093	FIL	G's	9.8	98.1	-77.5	38.3	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

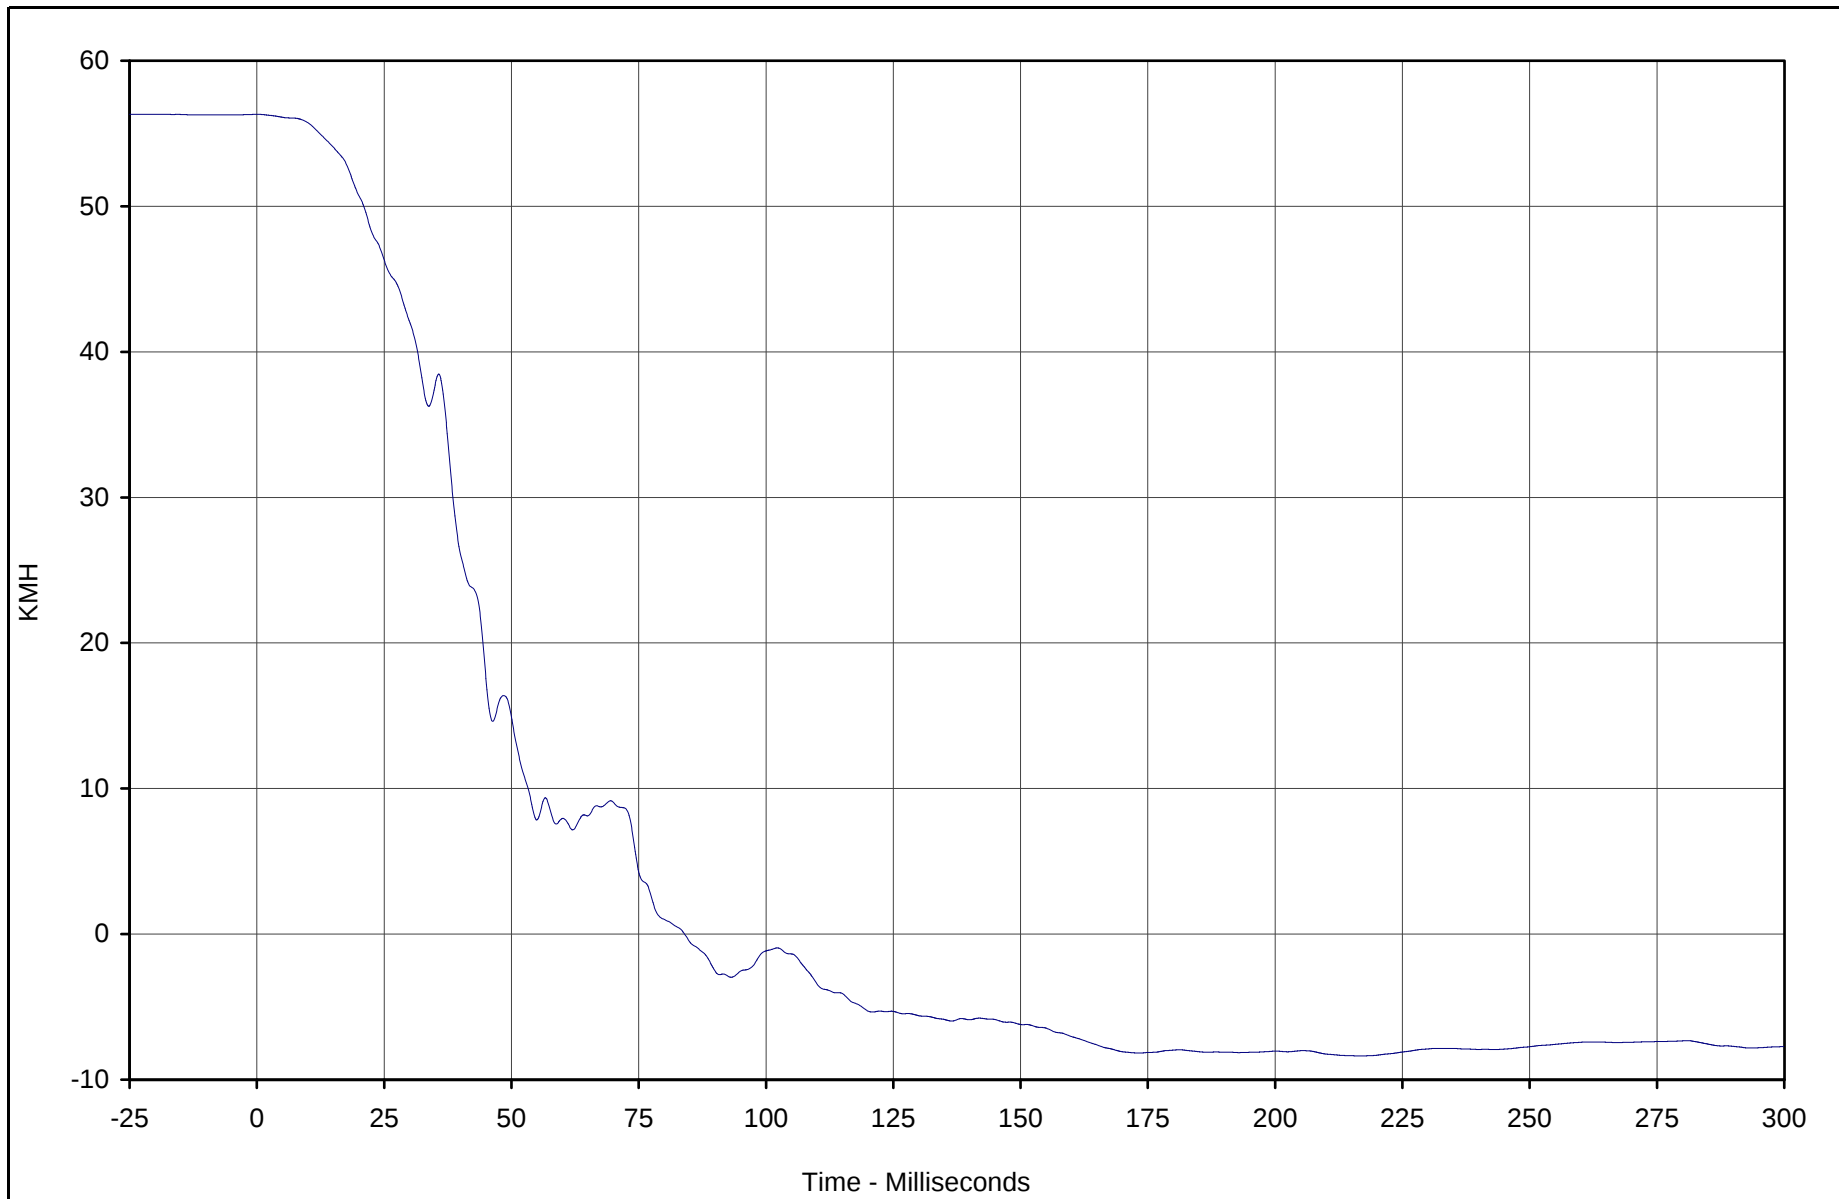

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Left Brake Caliper Velocity	093	IN1	KMH	56.3	0.2	-8.4	216.7	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

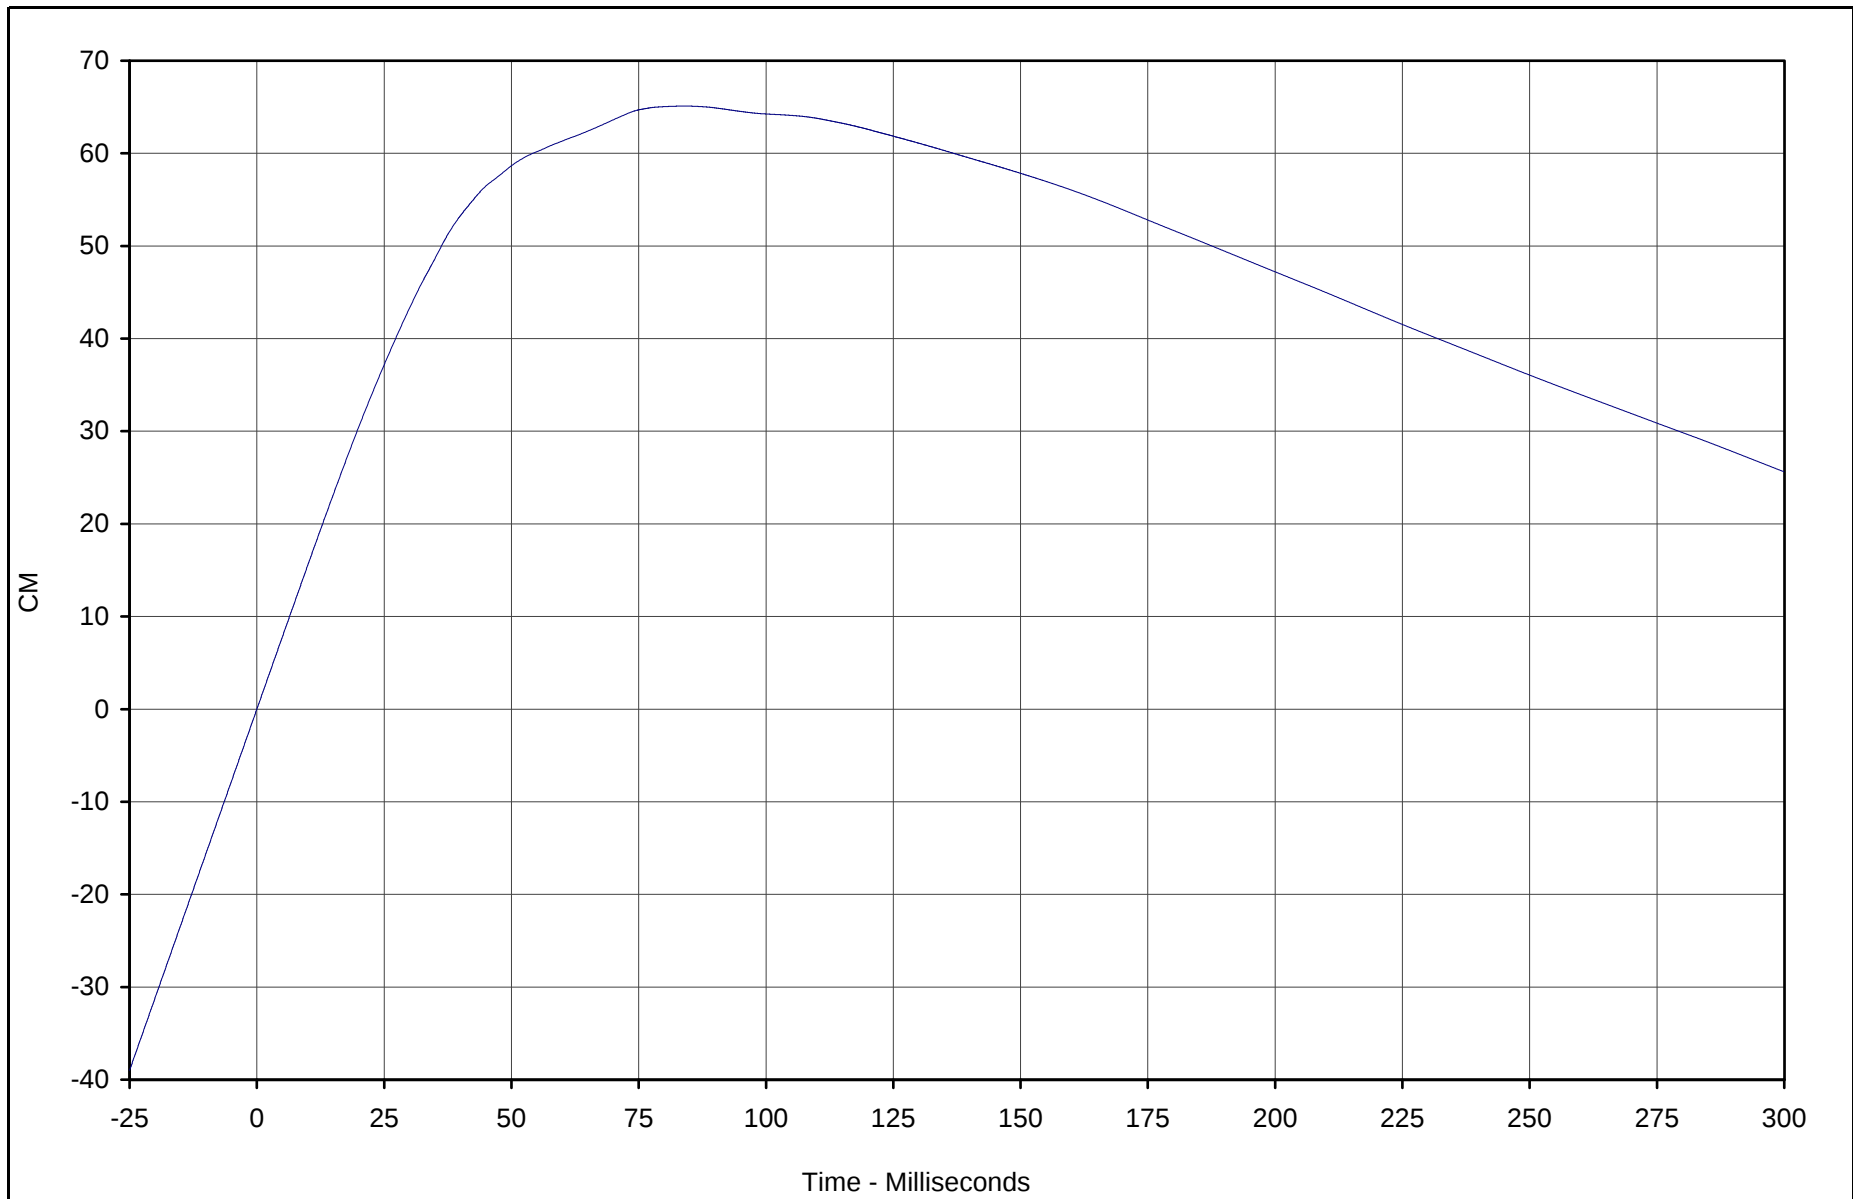

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Left Brake Caliper Displ.	093	IN2	CM	65.1	84.0	0.0	0.0	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

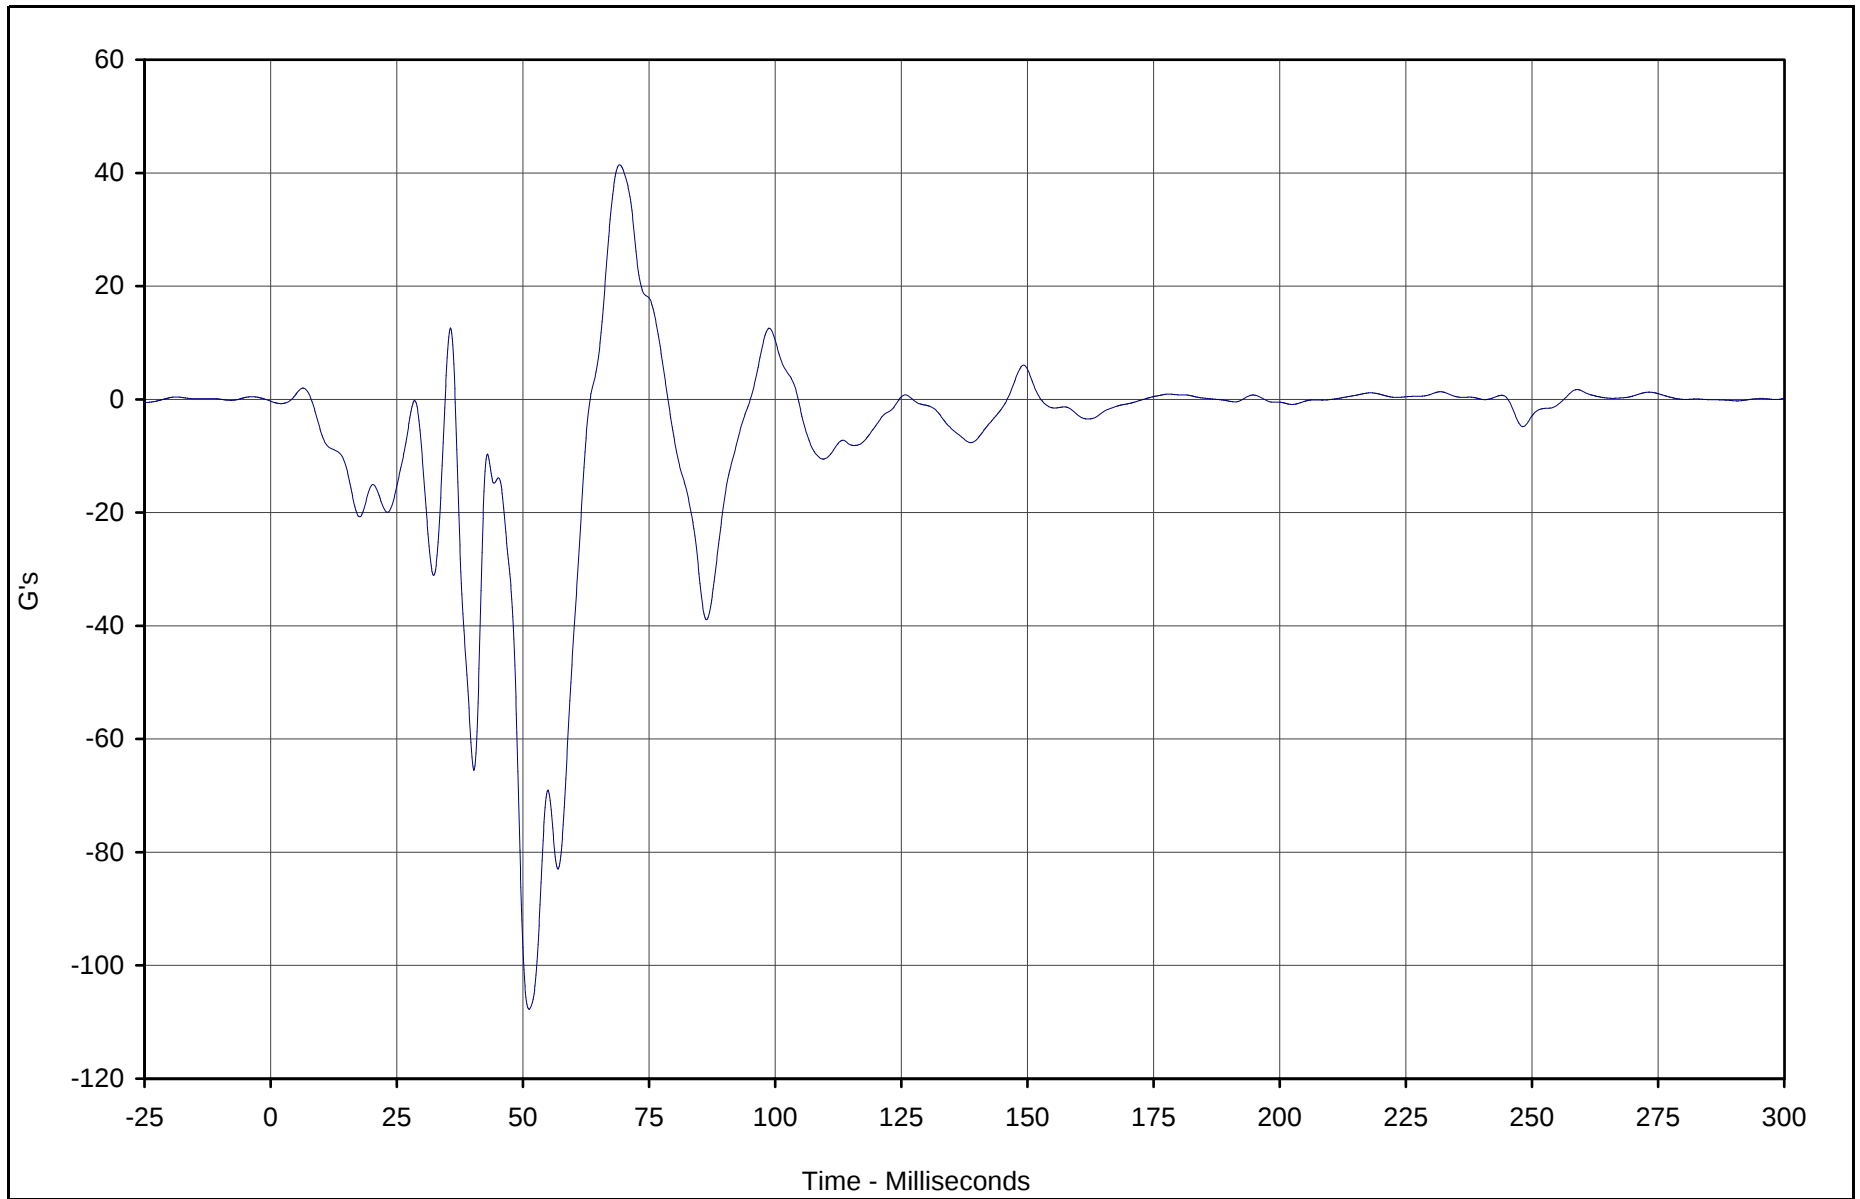

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Right Brake Caliper	094	FIL	G's	41.5	69.1	-107.7	51.2	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

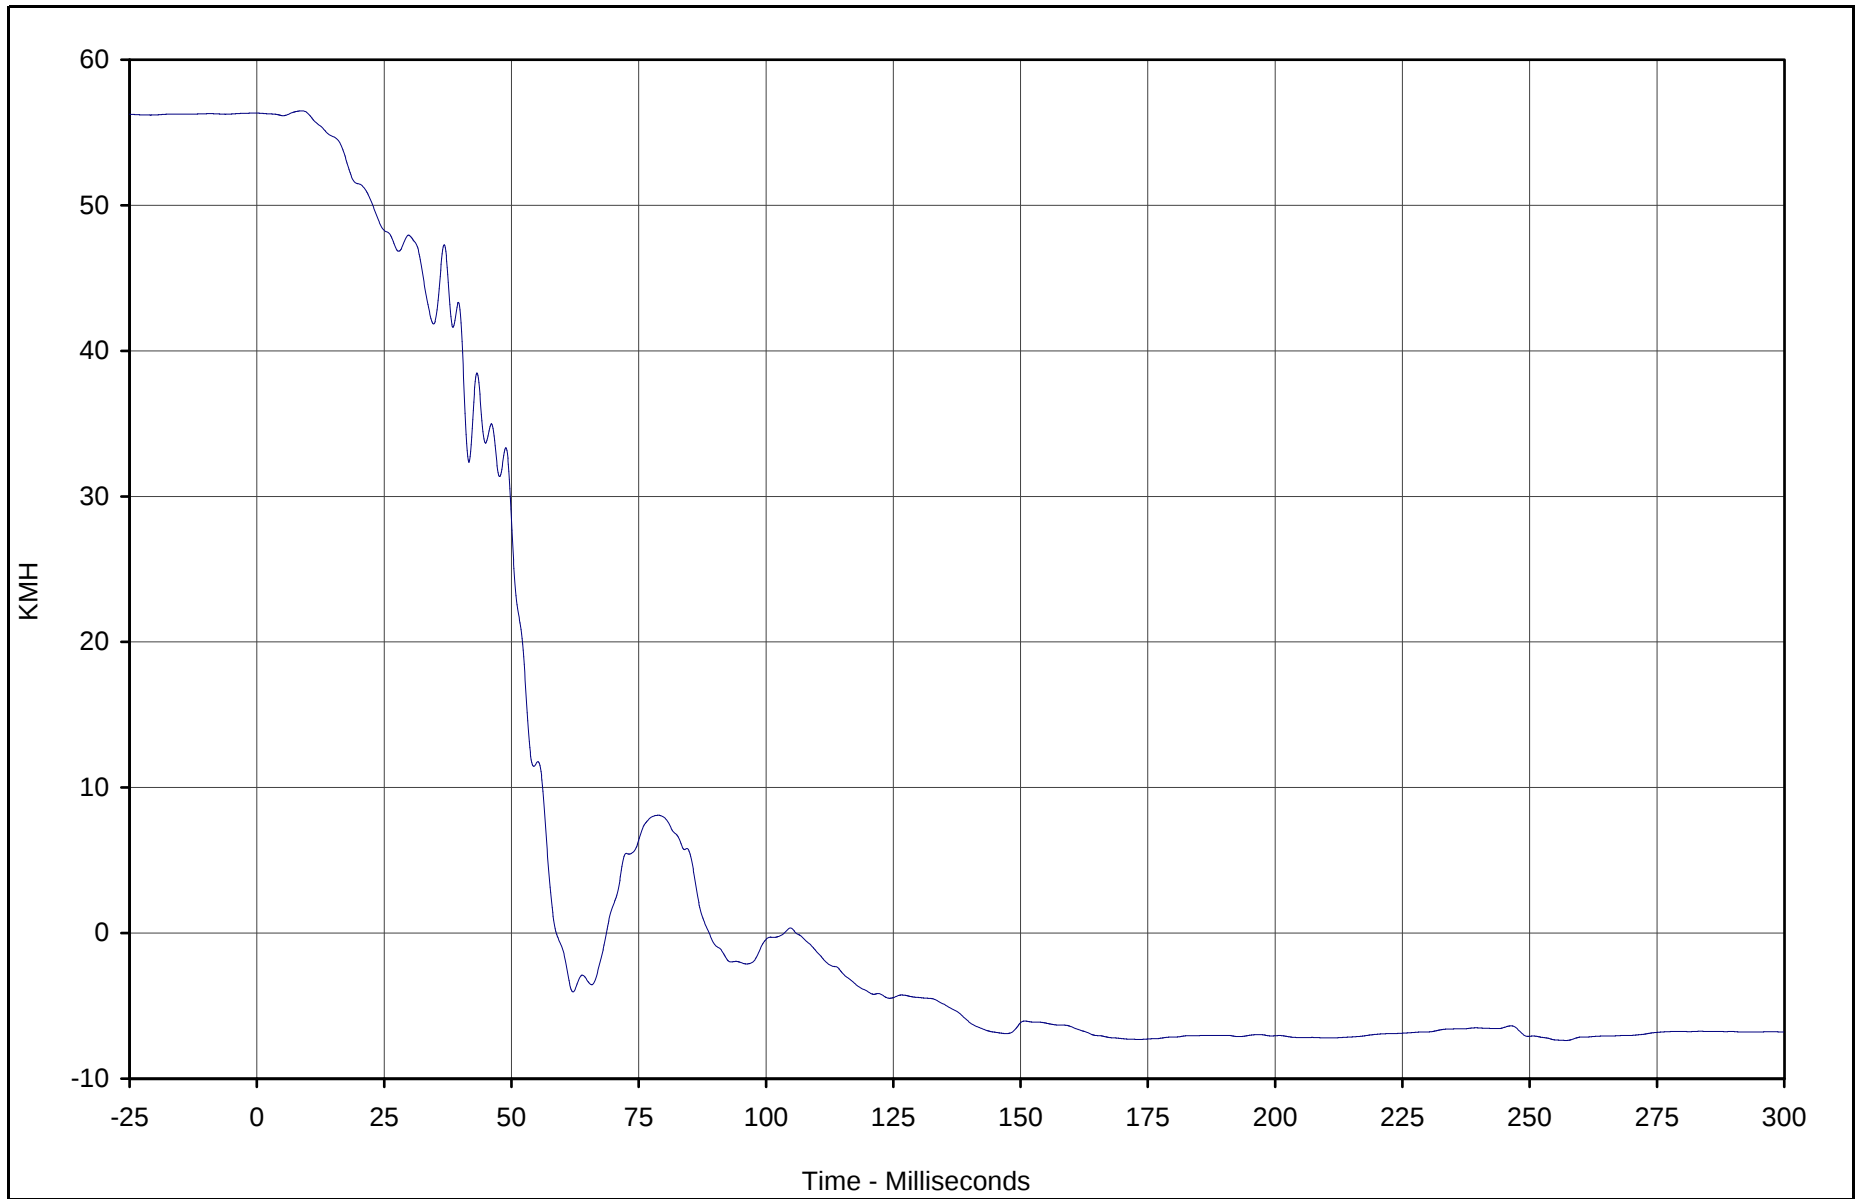

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Right Brake Caliper Velocity	094	IN1	KMH	56.5	8.8	-7.4	257.1	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

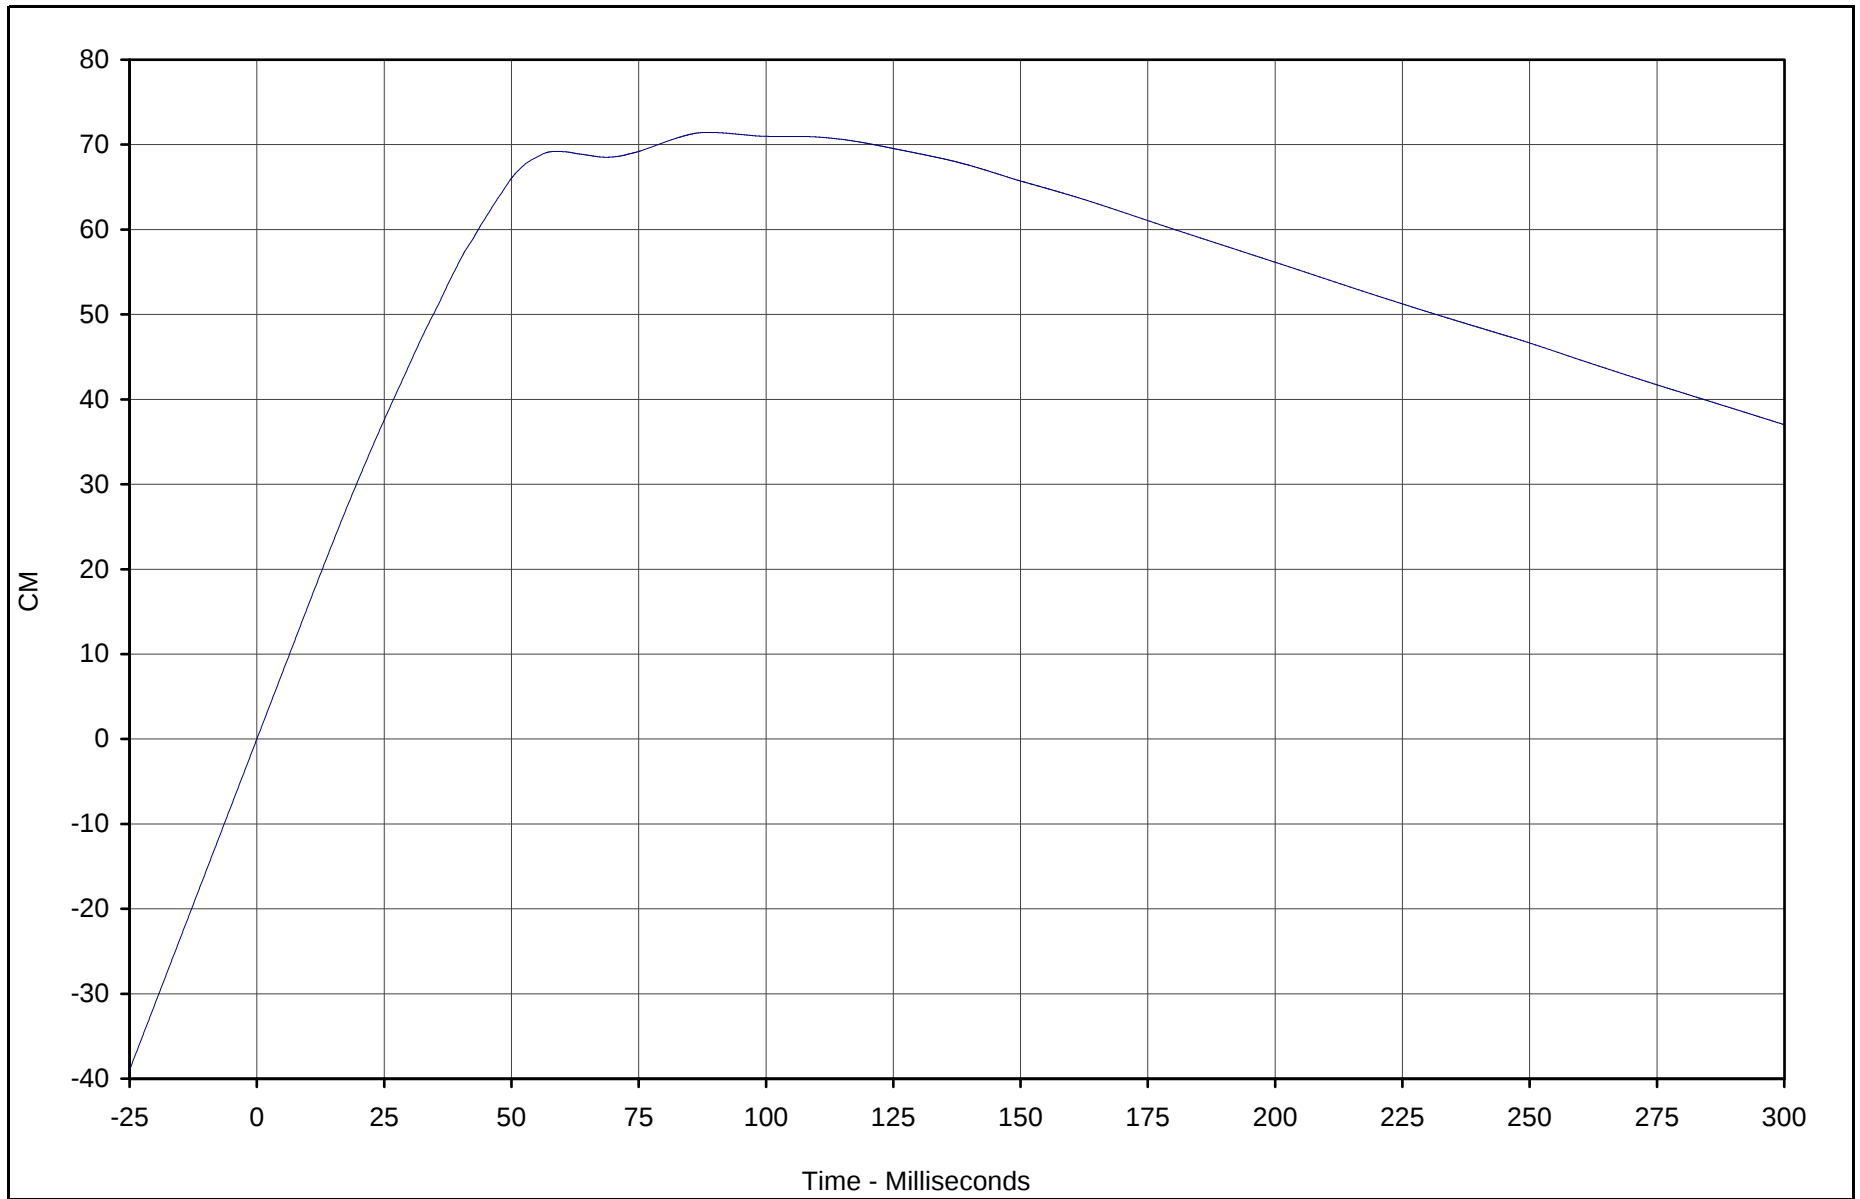

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Right Brake Caliper Displ.	094	IN2	CM	71.4	88.8	0.0	0.0	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

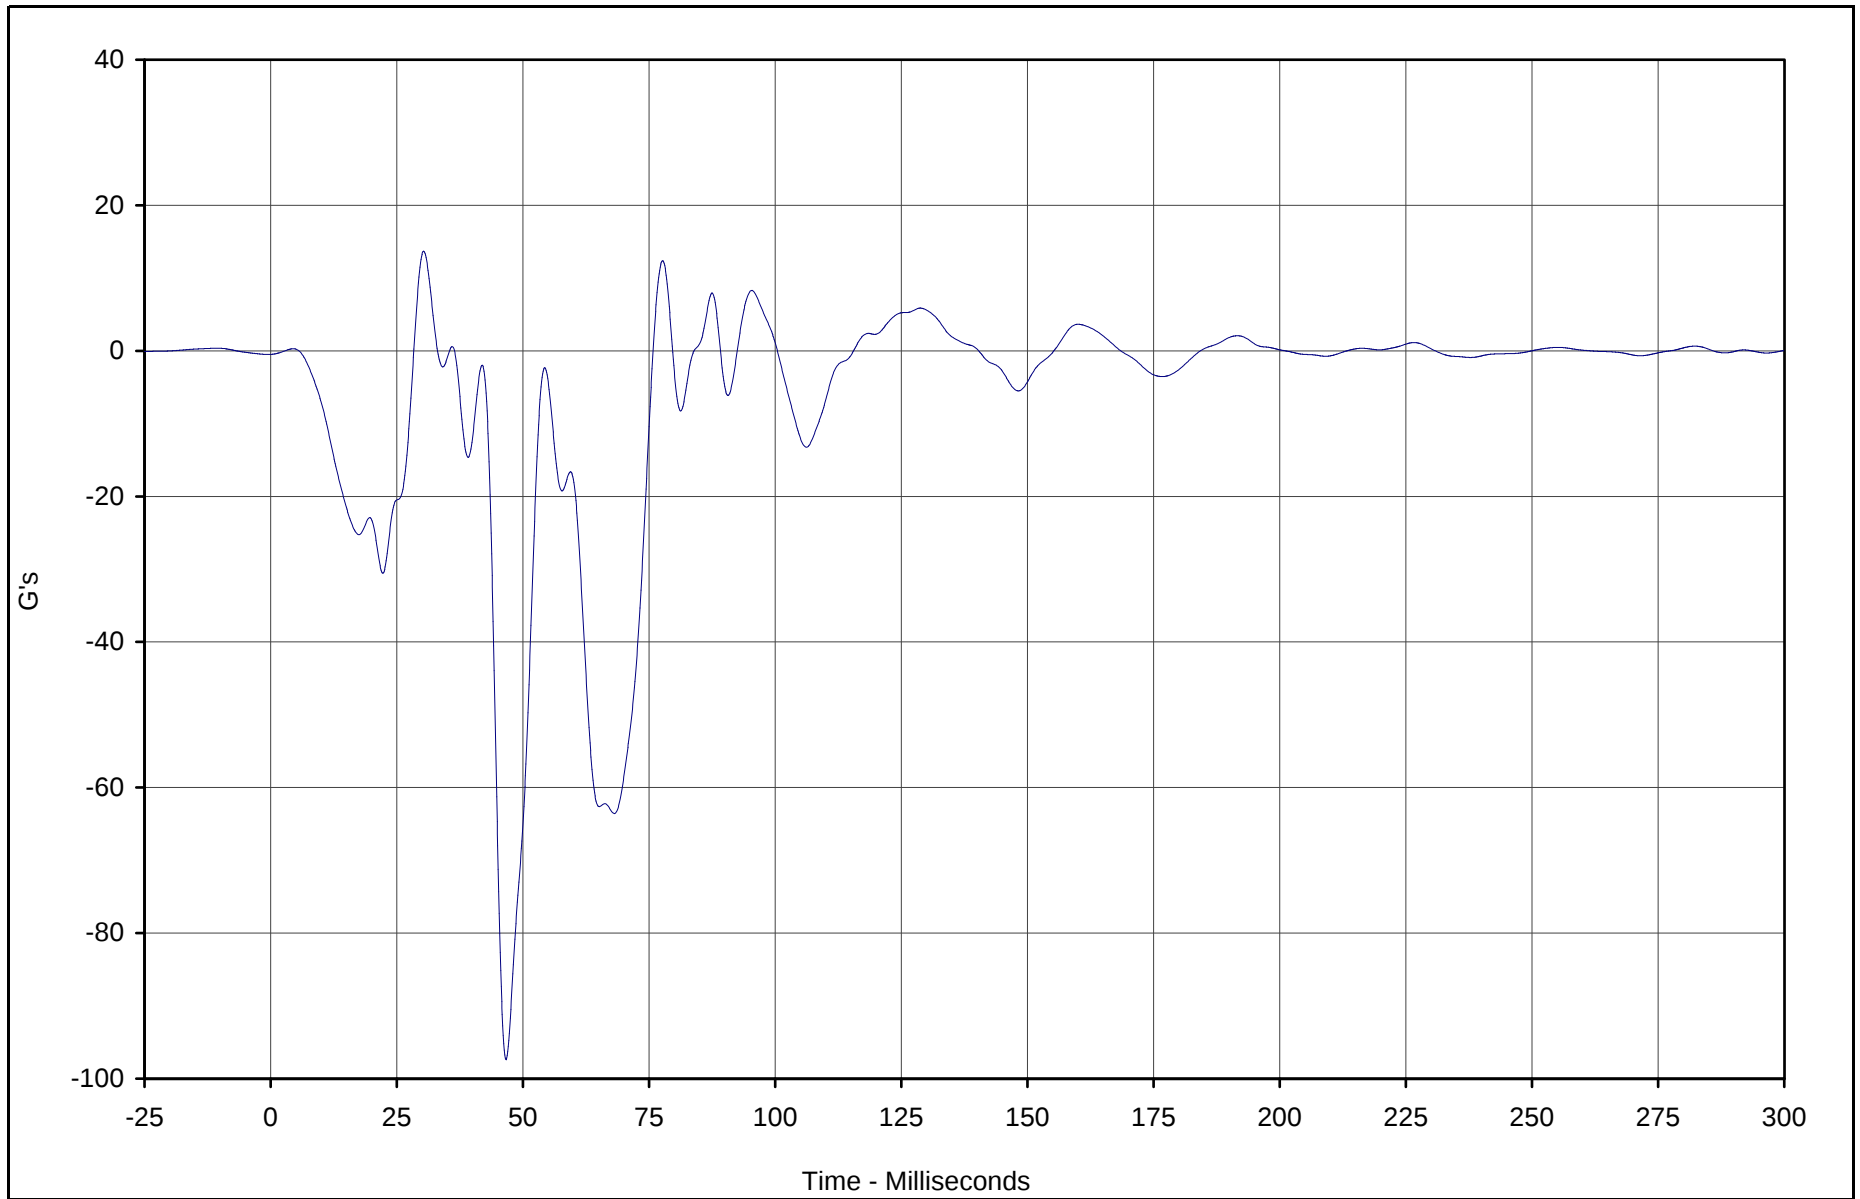

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Instrument Panel	095	FIL	G's	13.7	30.3	-97.4	46.7	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

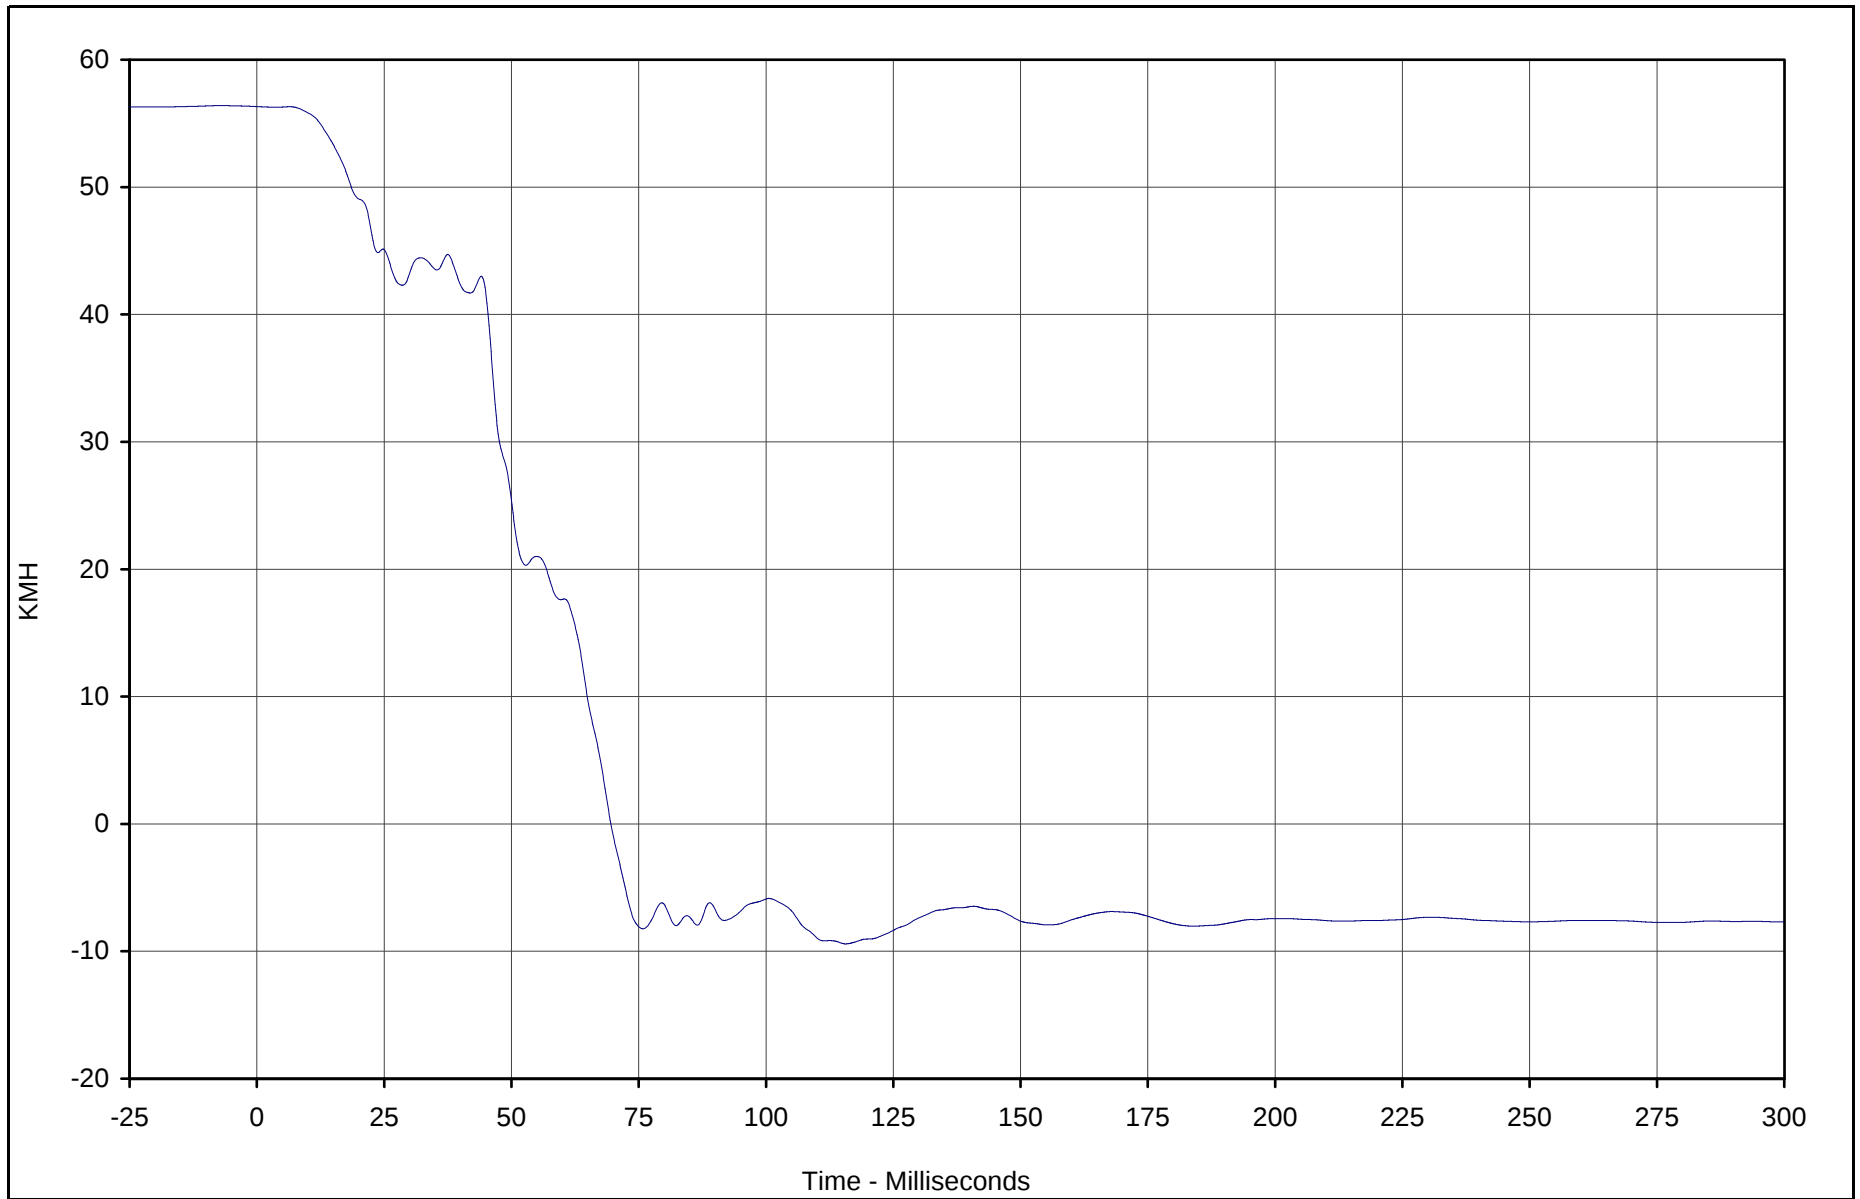

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Instrument Panel Velocity	095	IN1	KMH	56.3	0.0	-9.4	115.6	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

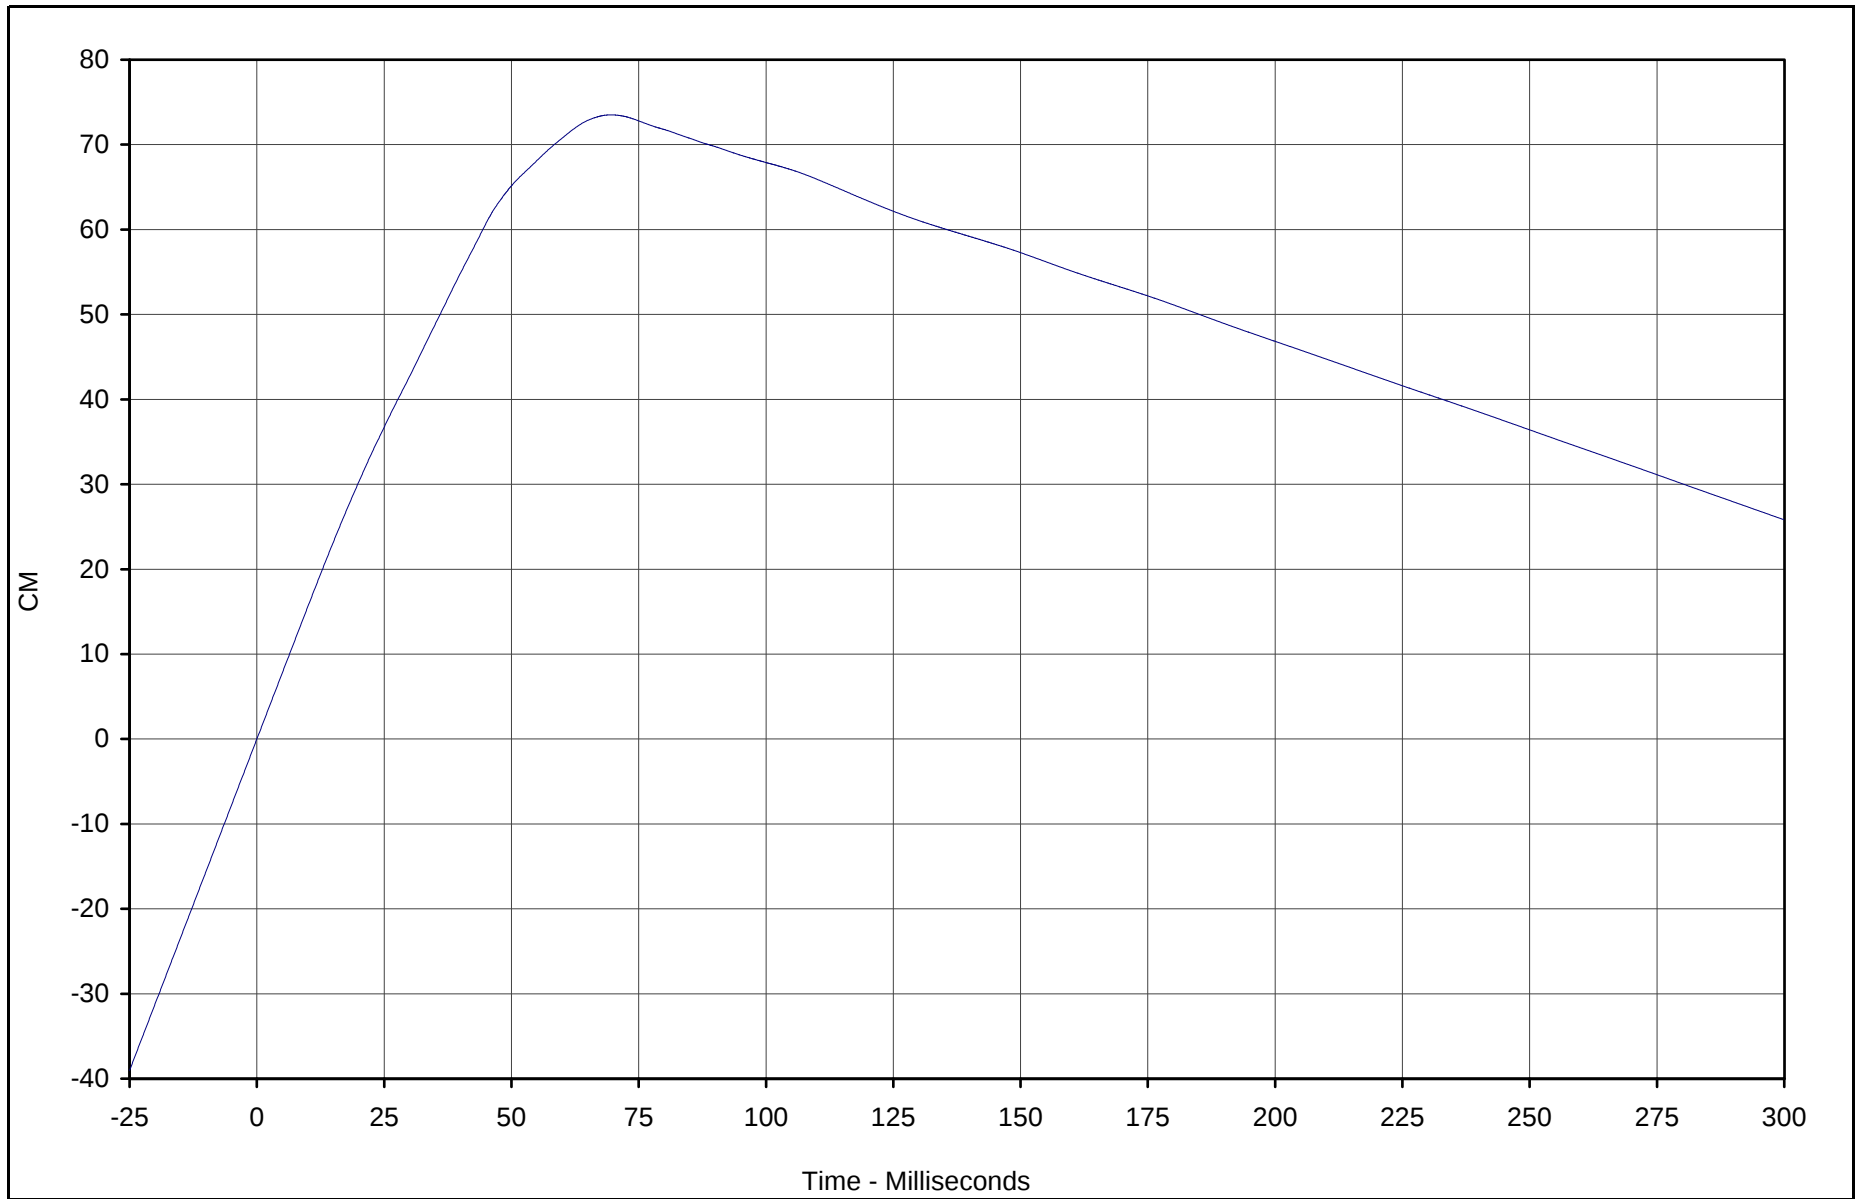

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Instrument Panel Displacement	095	IN2	CM	73.5	69.5	0.0	0.0	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

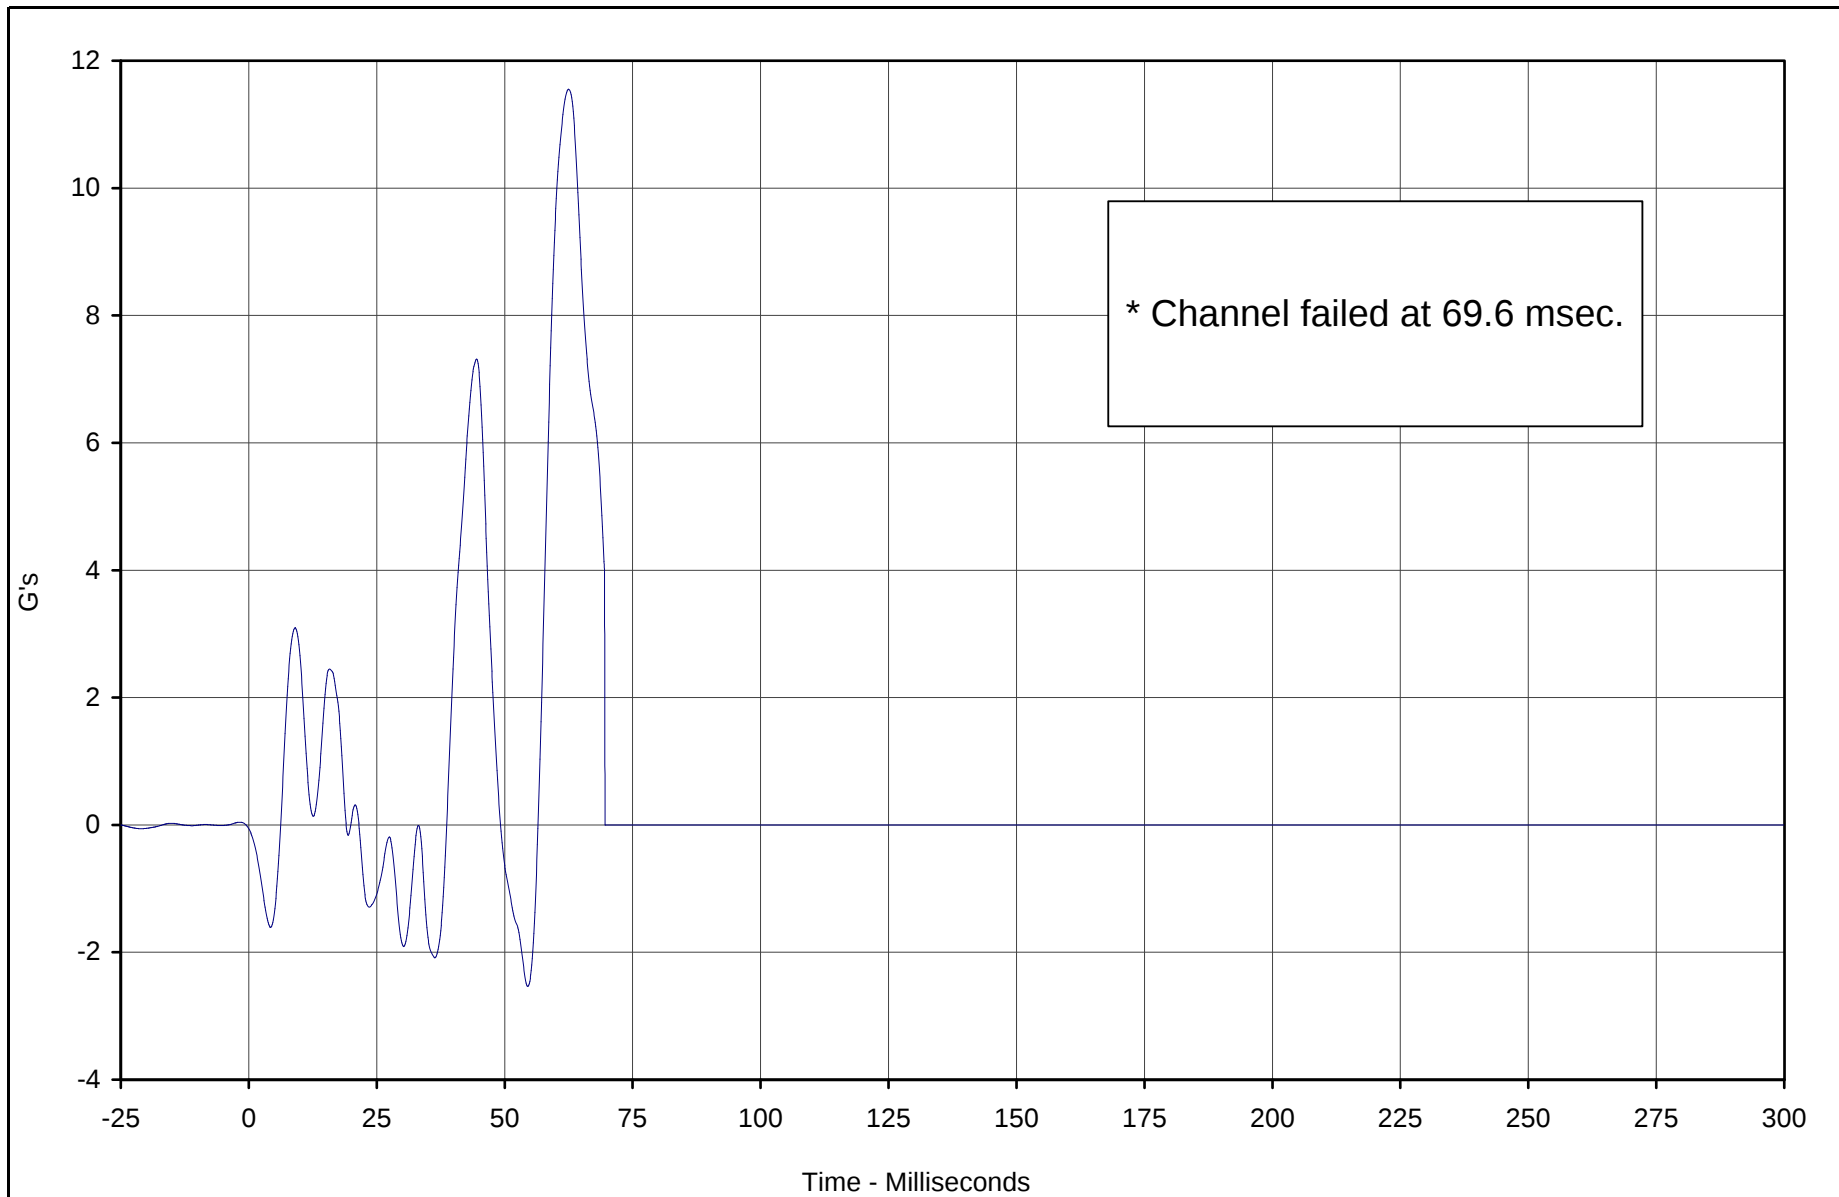

* Channel failed at 69.6 msec.

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Left Rear Z	096	FIL	G's	11.6	62.5	-2.5	54.5	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

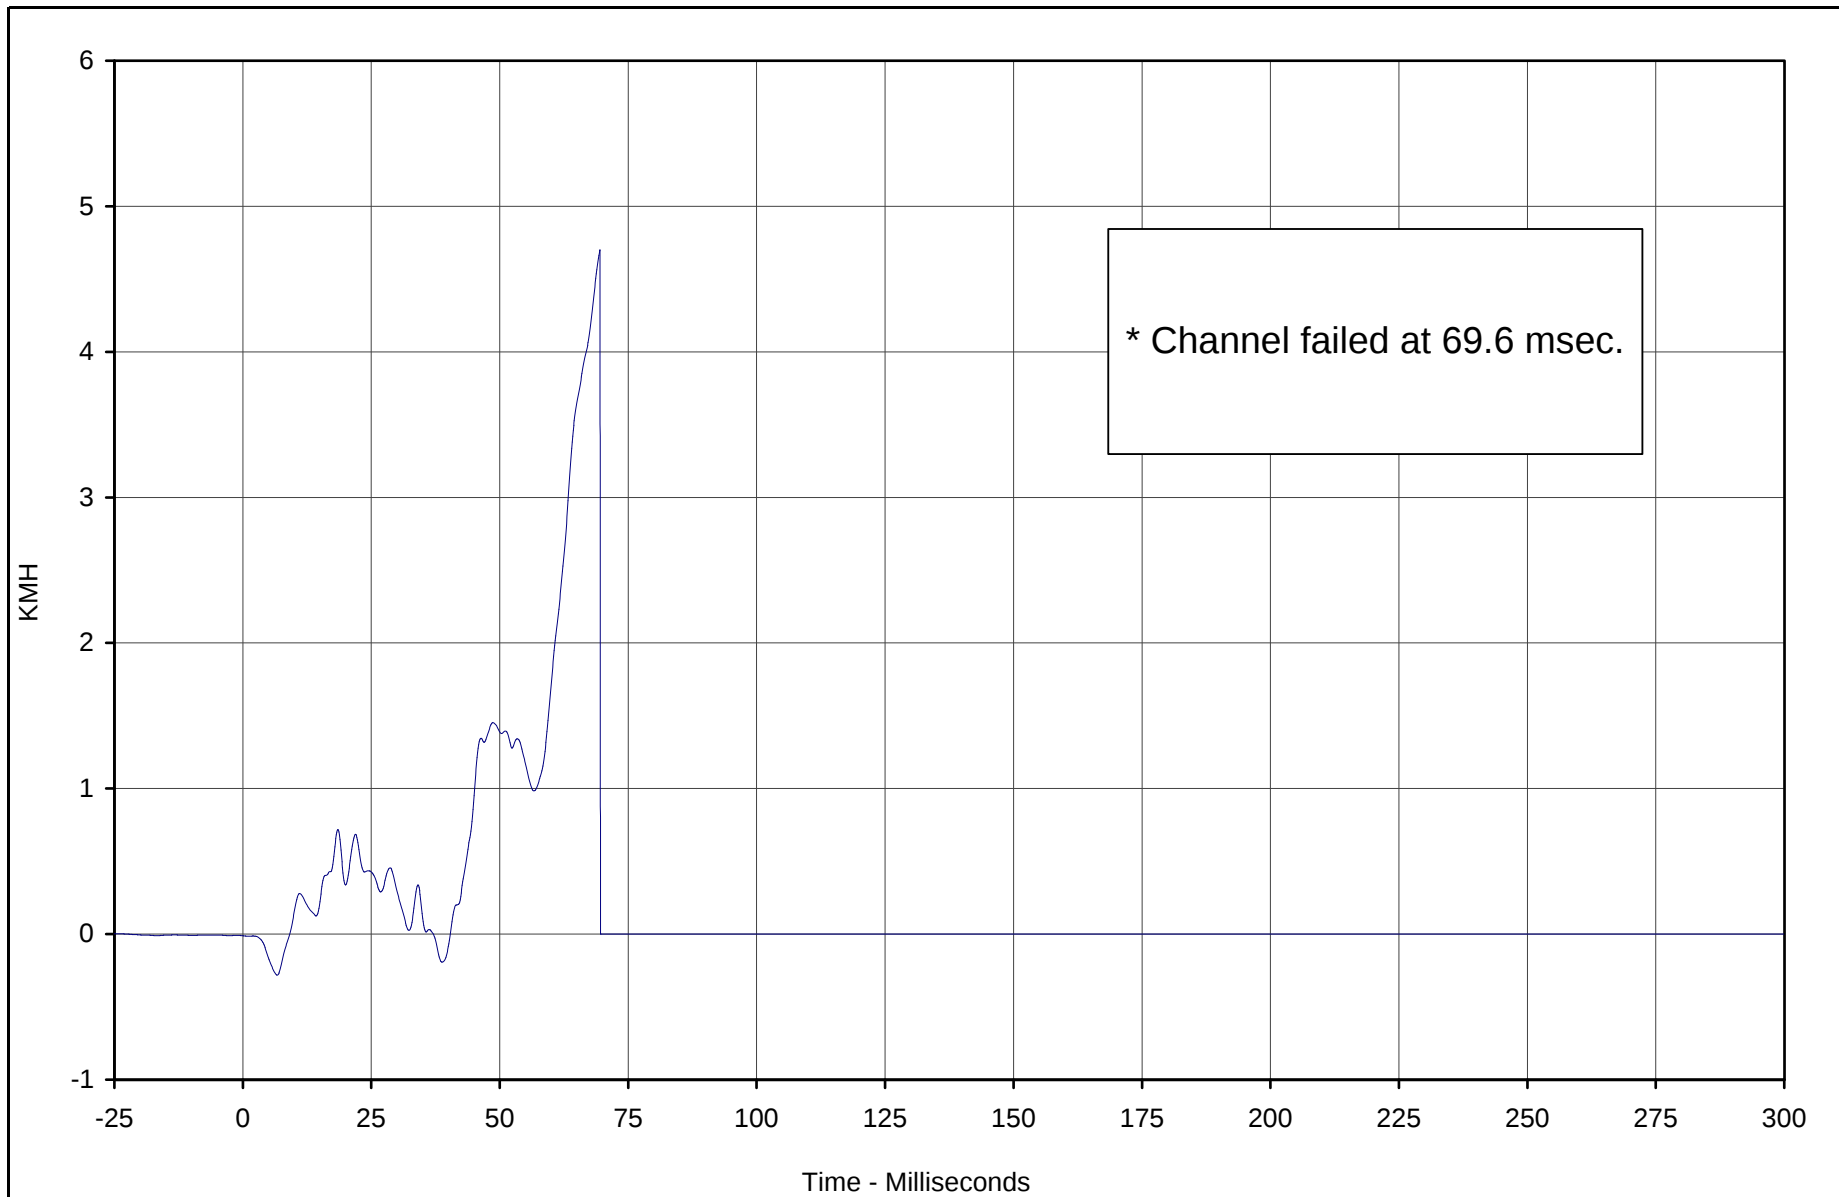

* Channel failed at 69.6 msec.

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Left Rear Z Velocity	096	IN1	KMH	4.7	69.5	-0.3	6.7	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

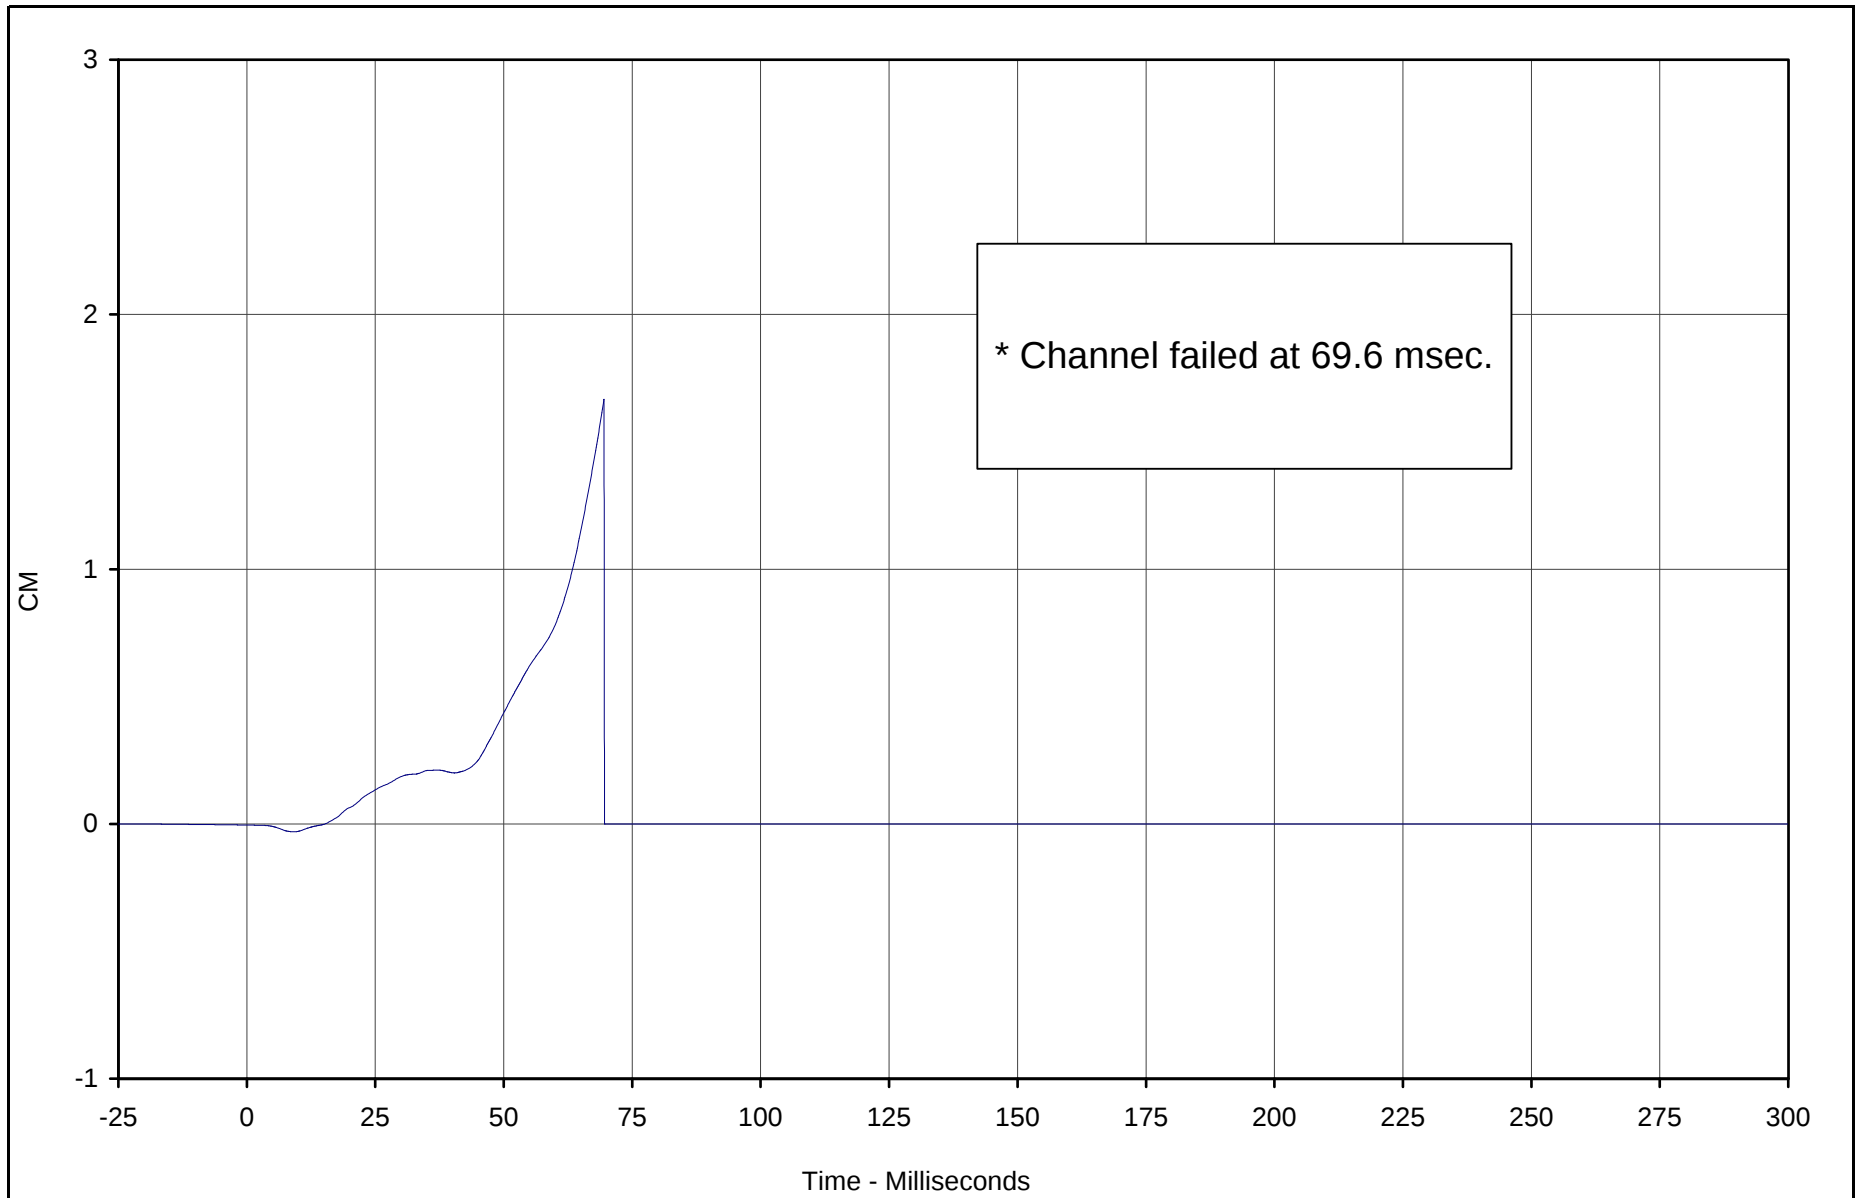

* Channel failed at 69.6 msec.

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Left Rear Z Displ.	096	IN2	CM	1.7	69.5	0.0	9.1	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

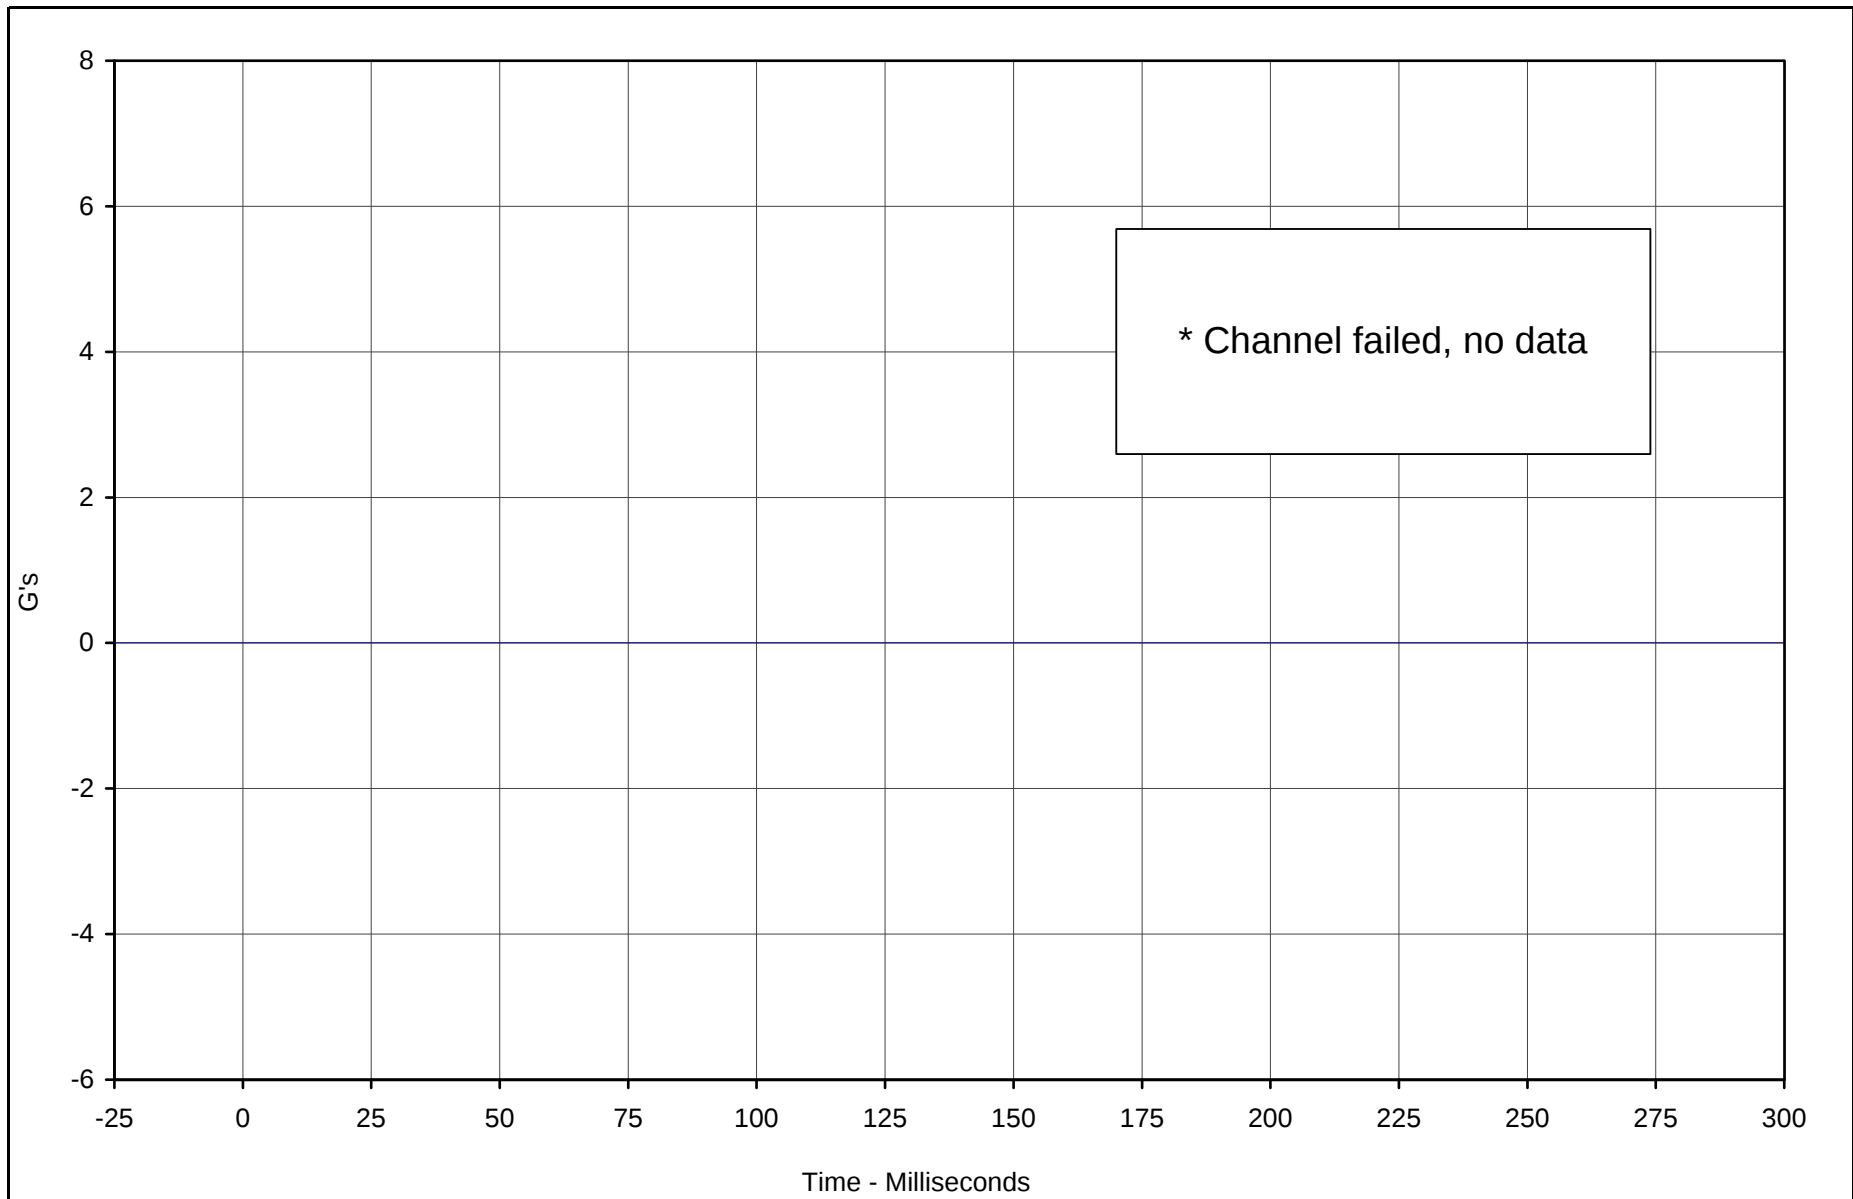

* Channel failed, no data

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Right Rear Z	097	FIL	G's	0.0	0.0	0.0	0.0	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

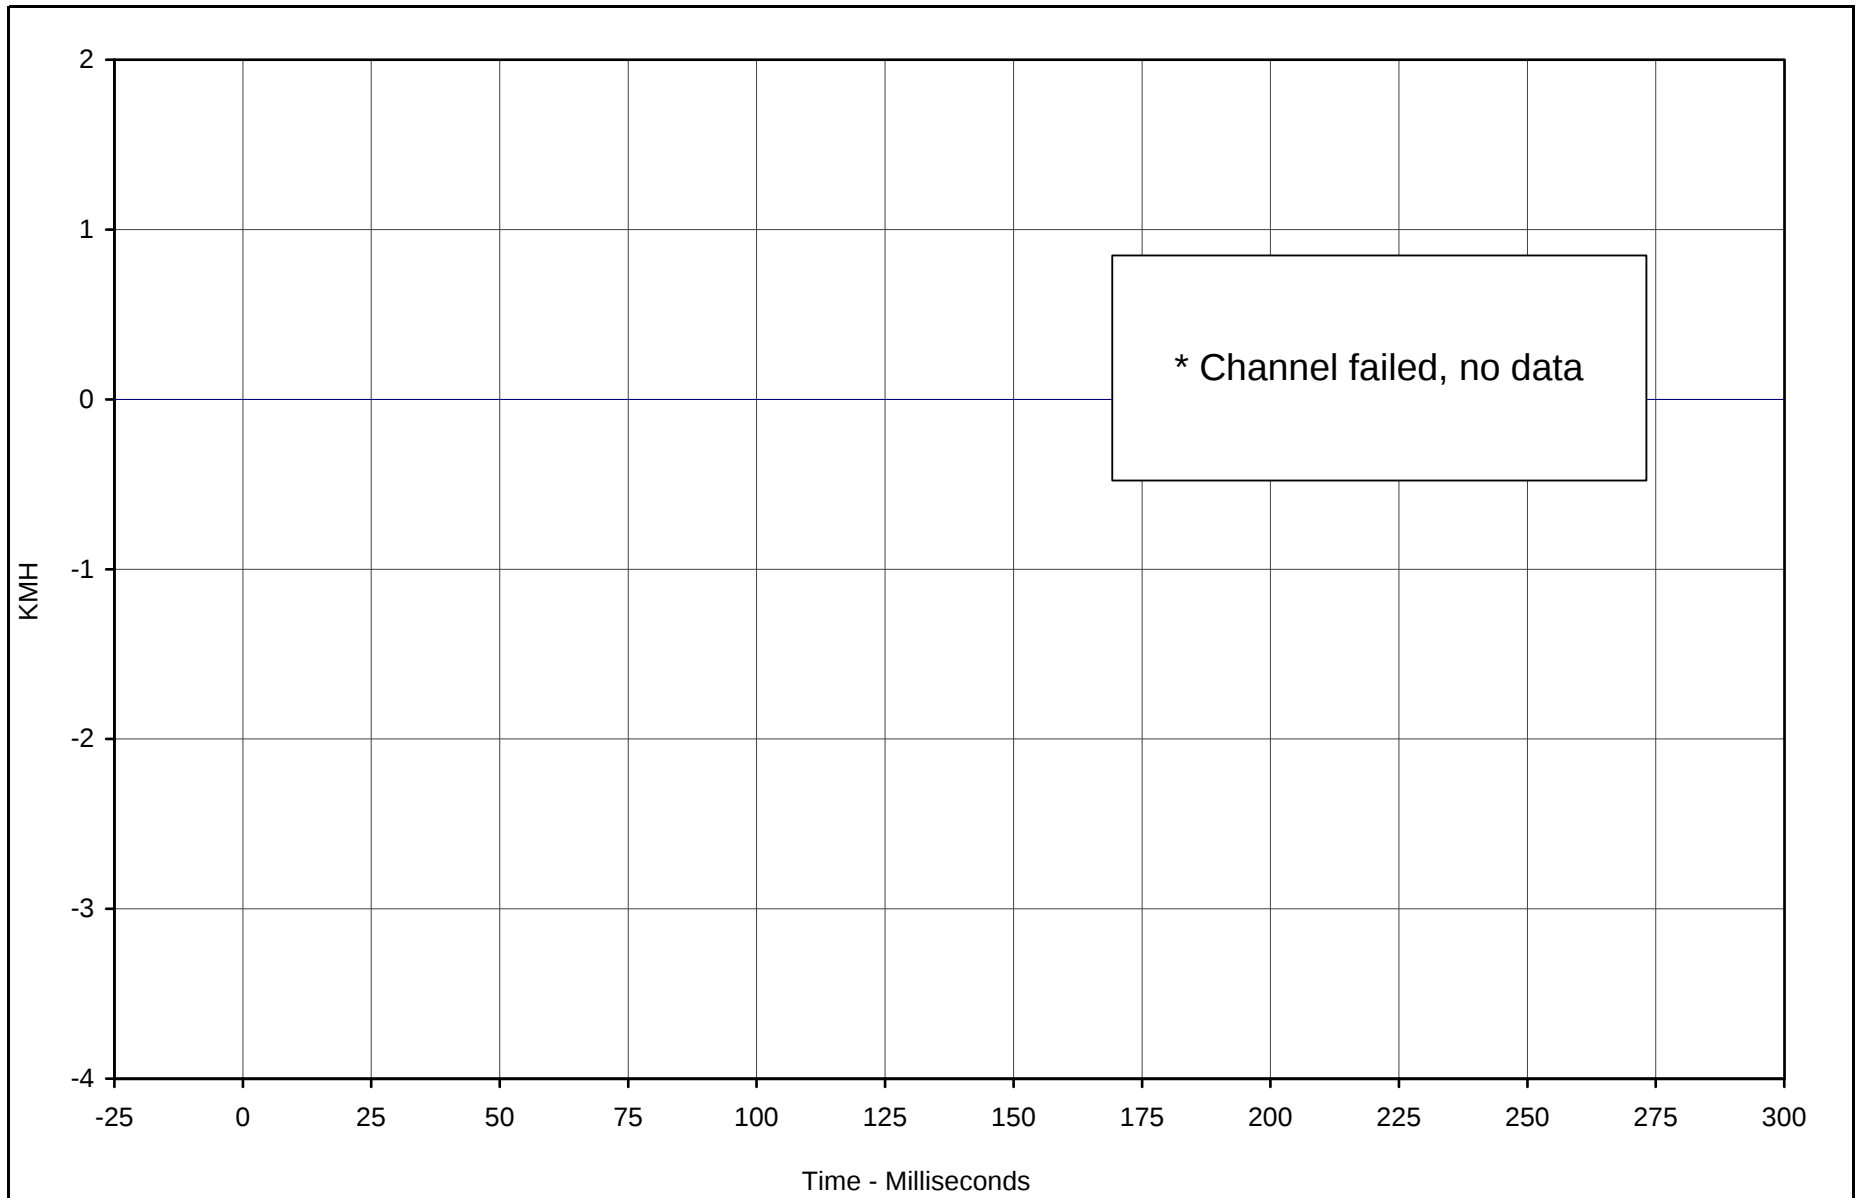

* Channel failed, no data

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Right Rear Z Velocity	097	IN1	KMH	0.0	0.0	0.0	0.0	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

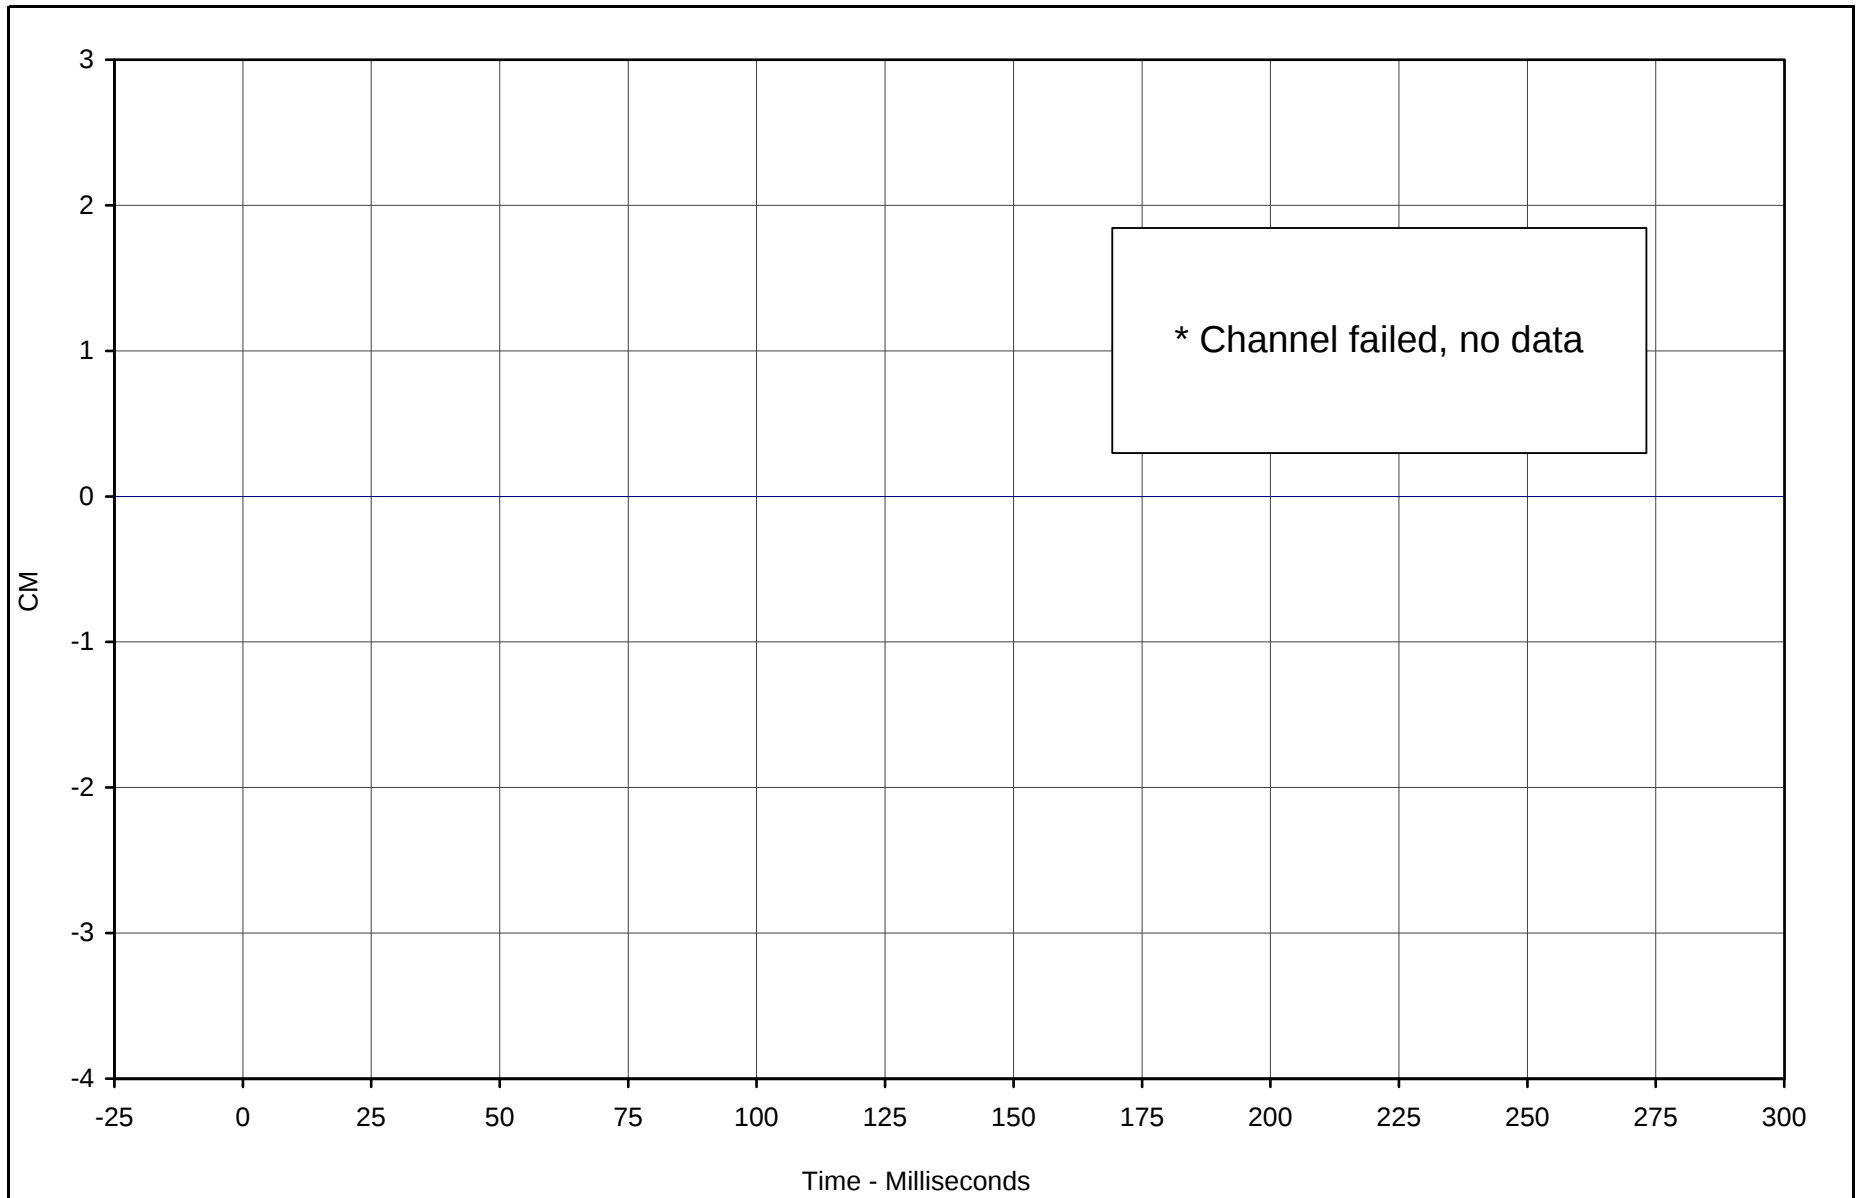

* Channel failed, no data

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Vehicle Right Rear Z Displ.	097	IN2	CM	0.0	0.0	0.0	0.0	180



Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV


Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

APPENDIX C

LOAD CELL BARRIER DATA PLOTS

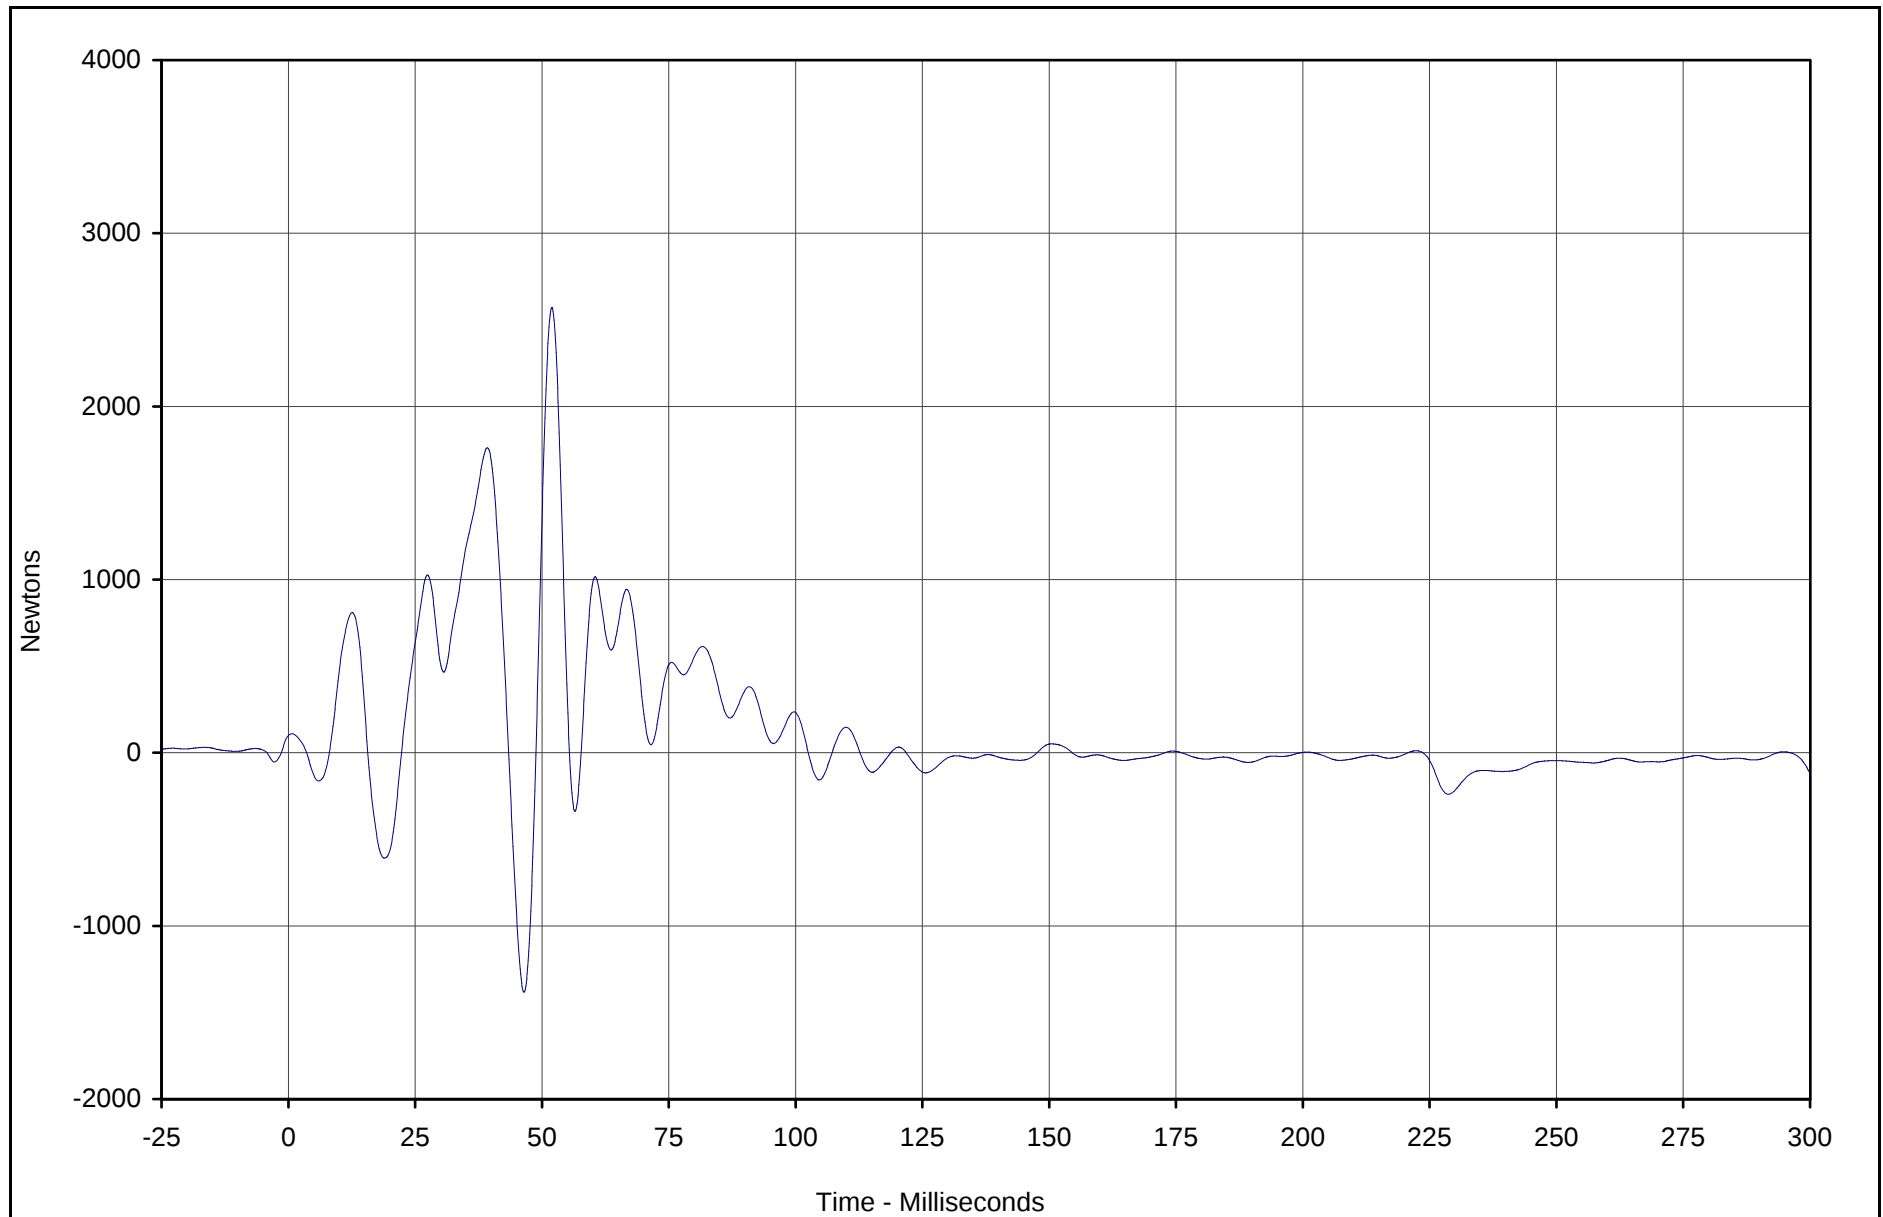

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force A1	098	FIL	Newtons	2572.1	52.0	-1382.0	46.5	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

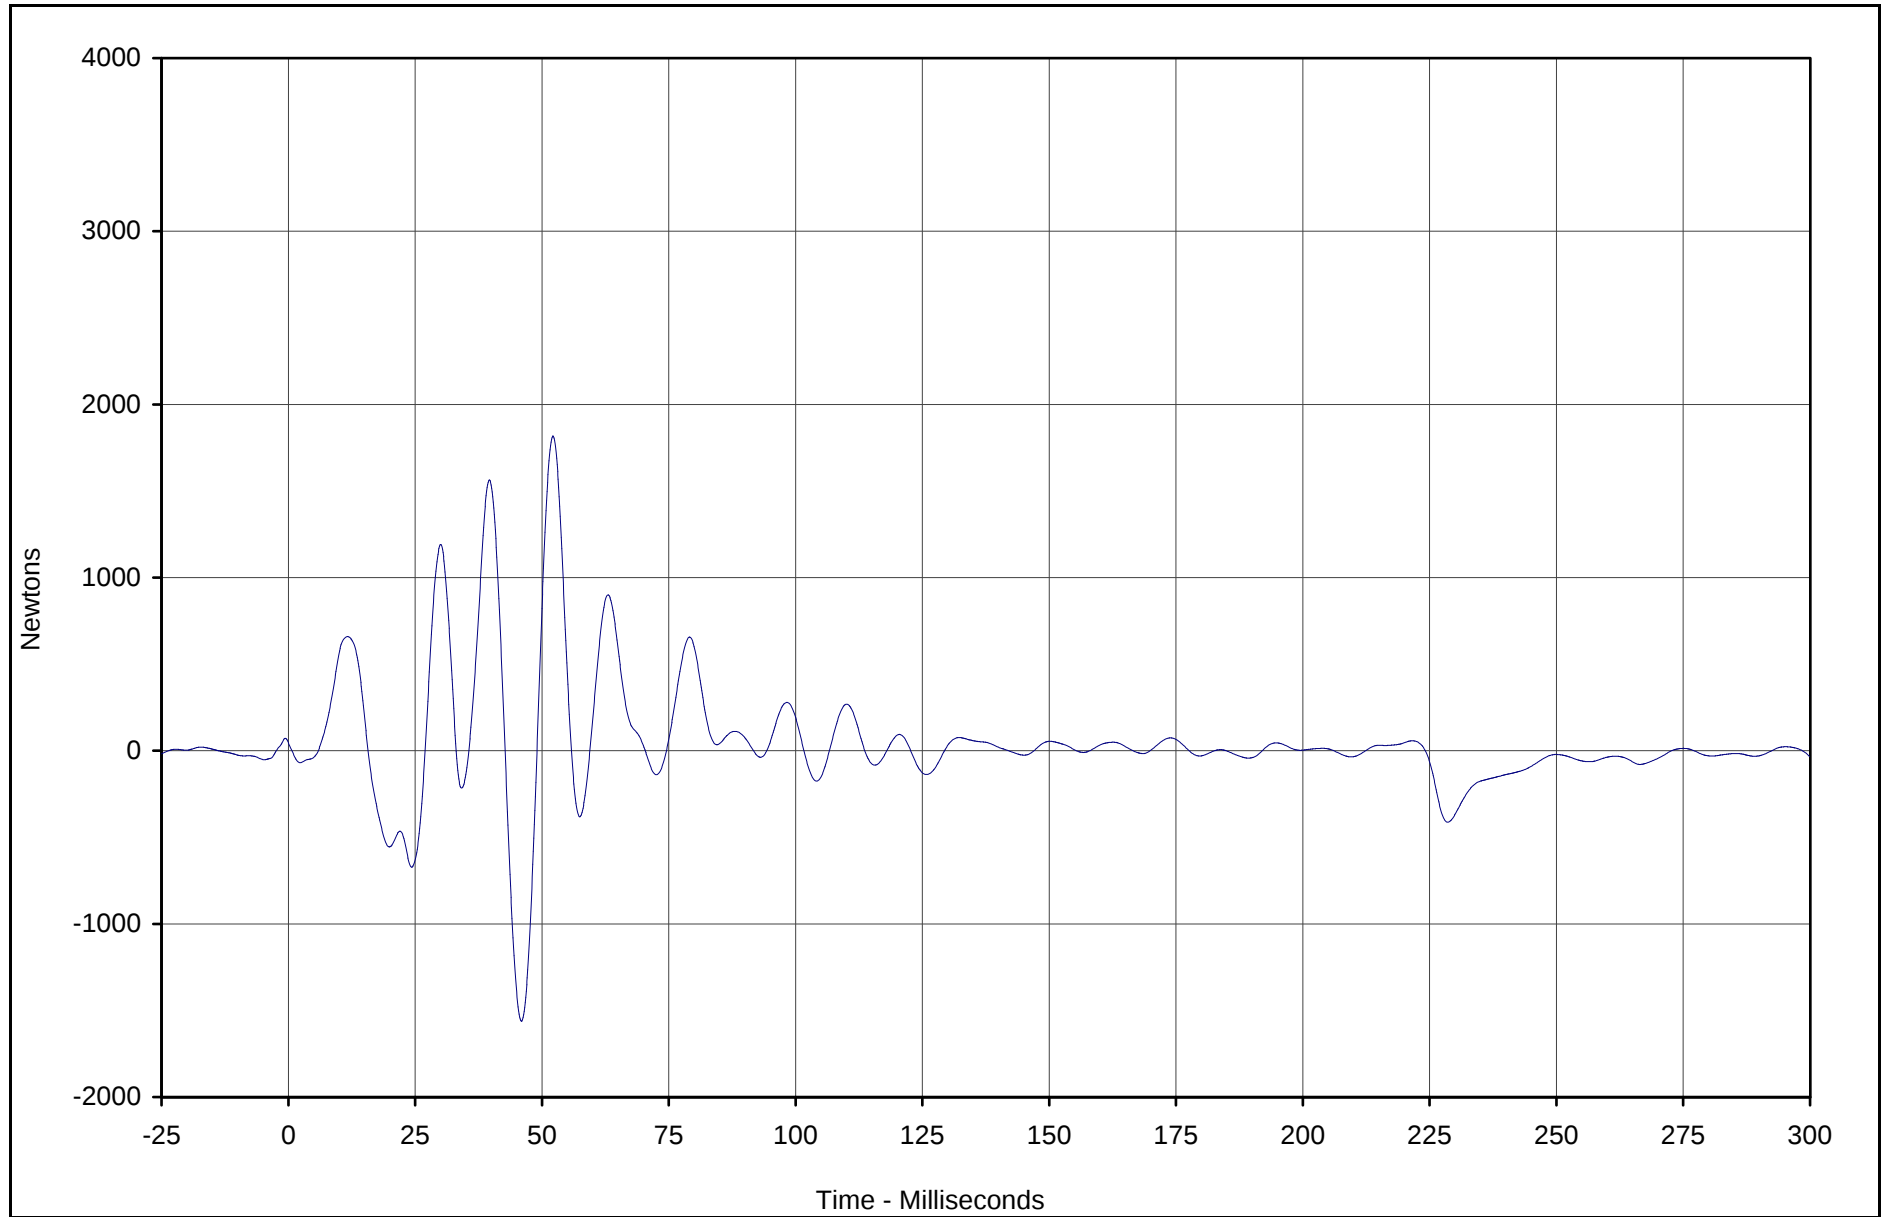

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force A2	099	FIL	Newtons	1817.3	52.2	-1562.0	46.0	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

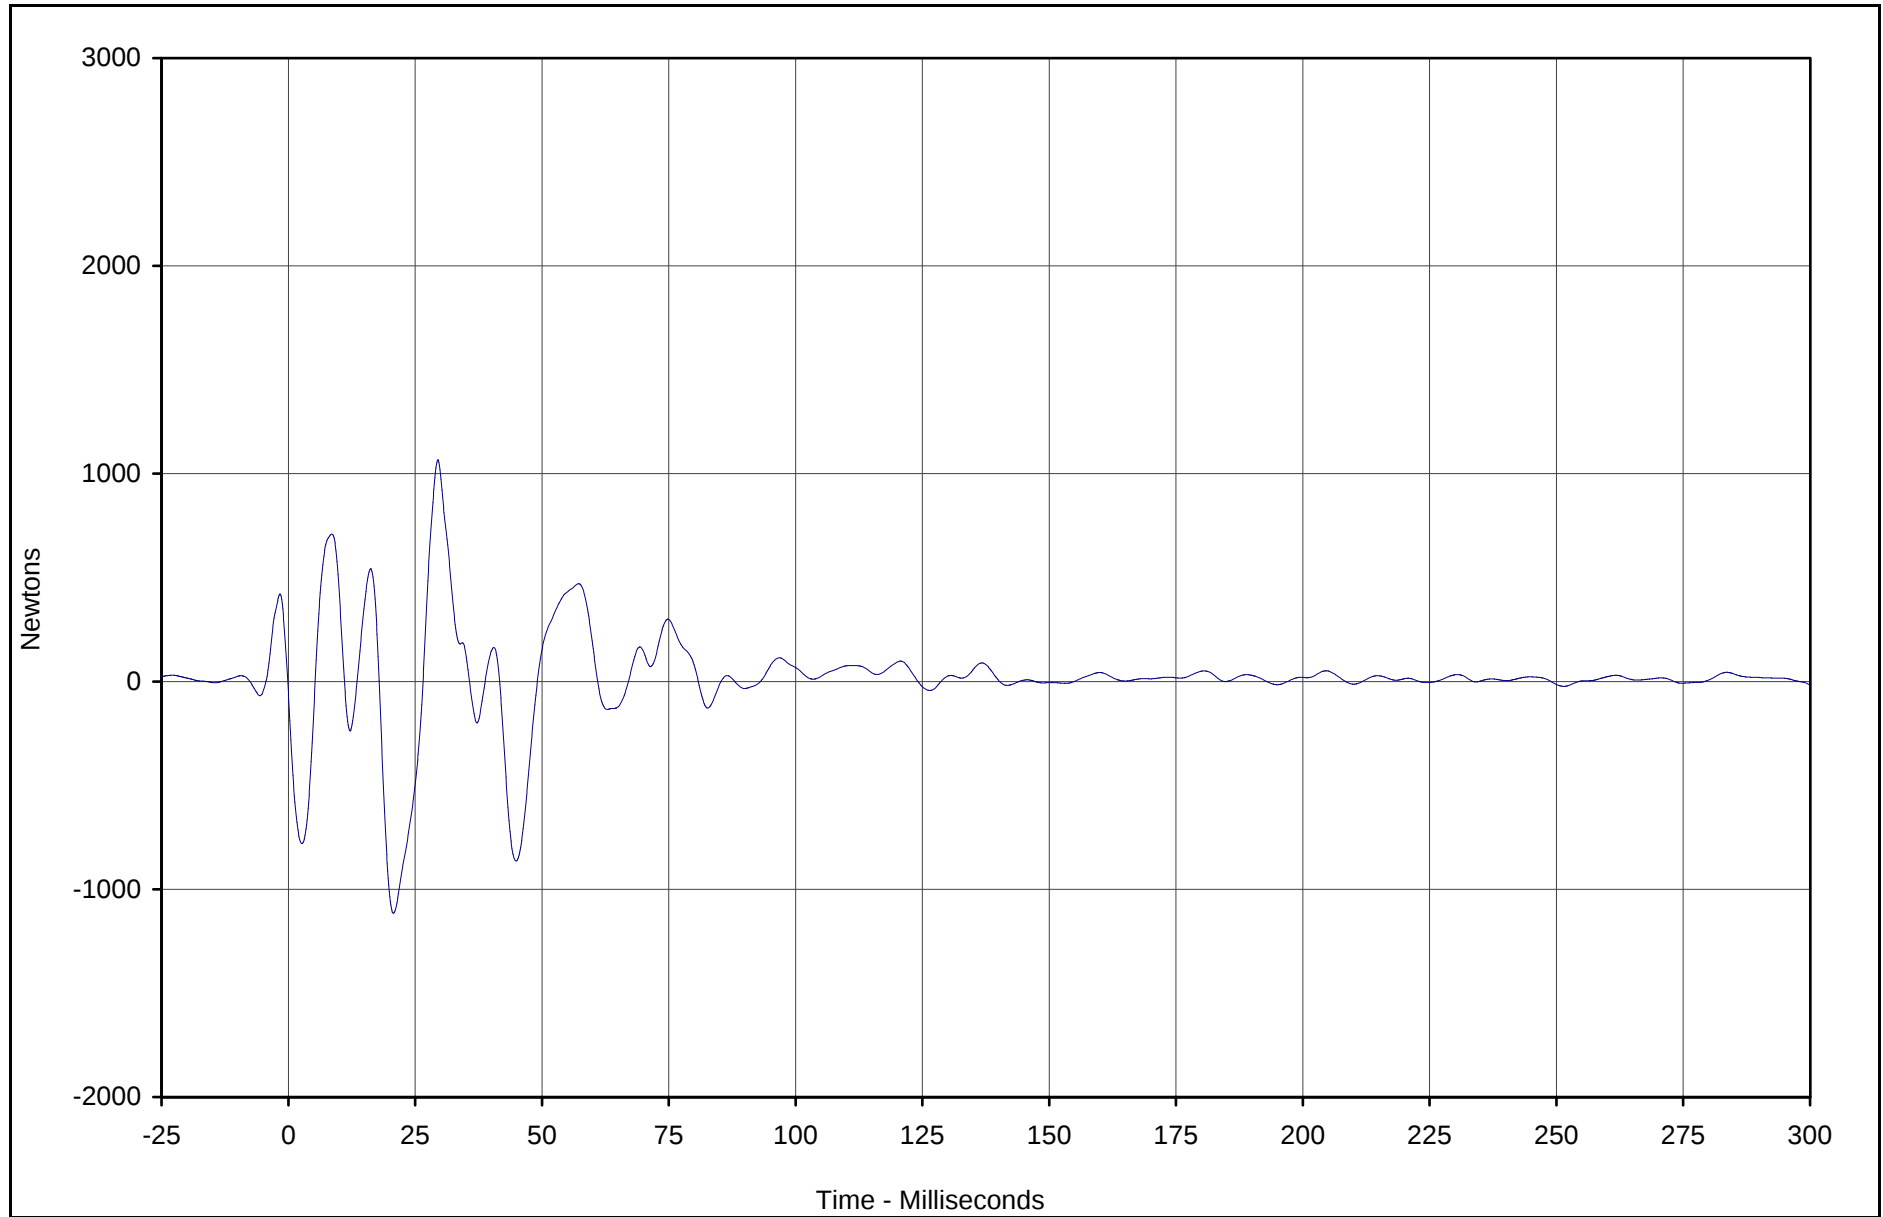

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force A3	100	FIL	Newtons	1067.1	29.5	-1114.9	20.7	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

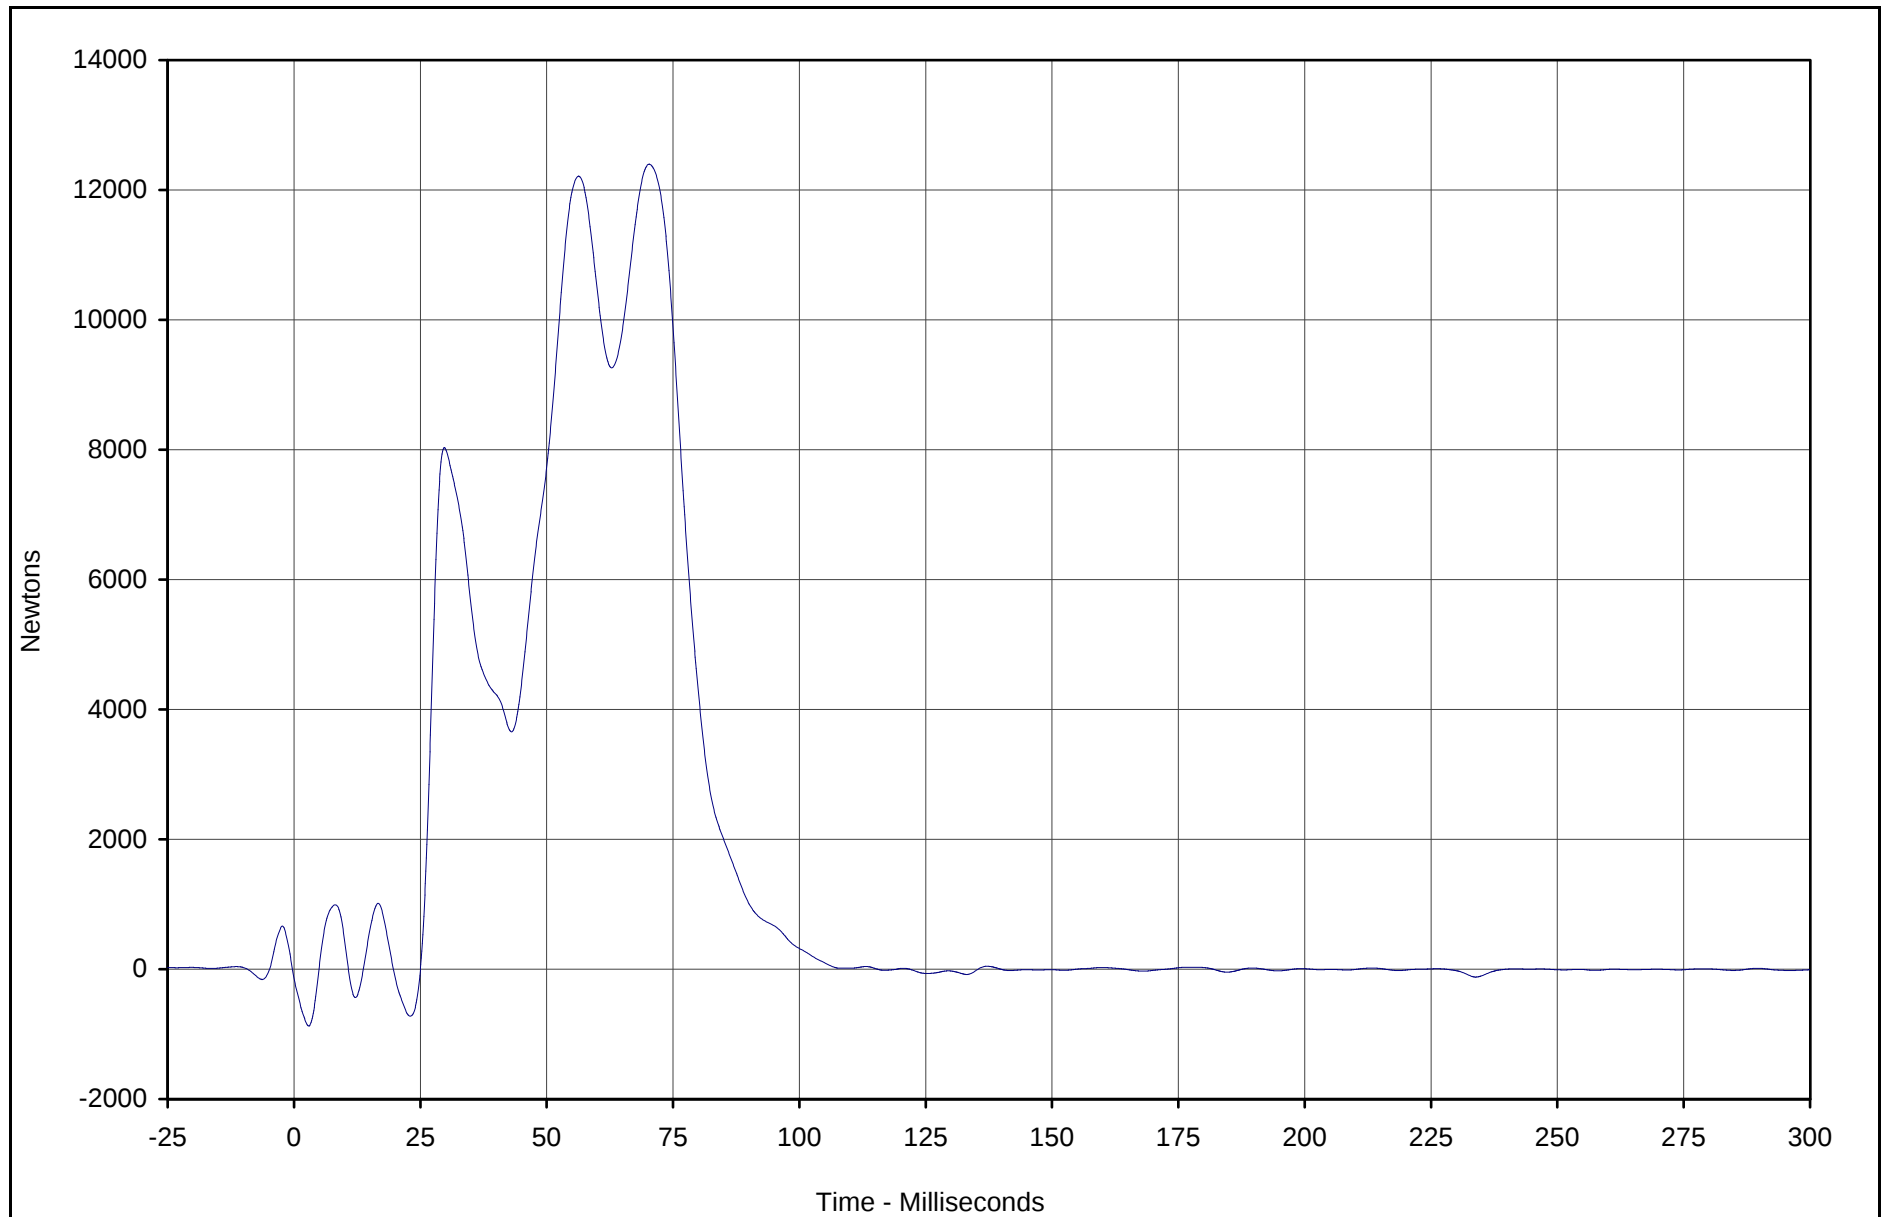

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force A4	101	FIL	Newtons	12396.7	70.3	-875.4	2.9	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

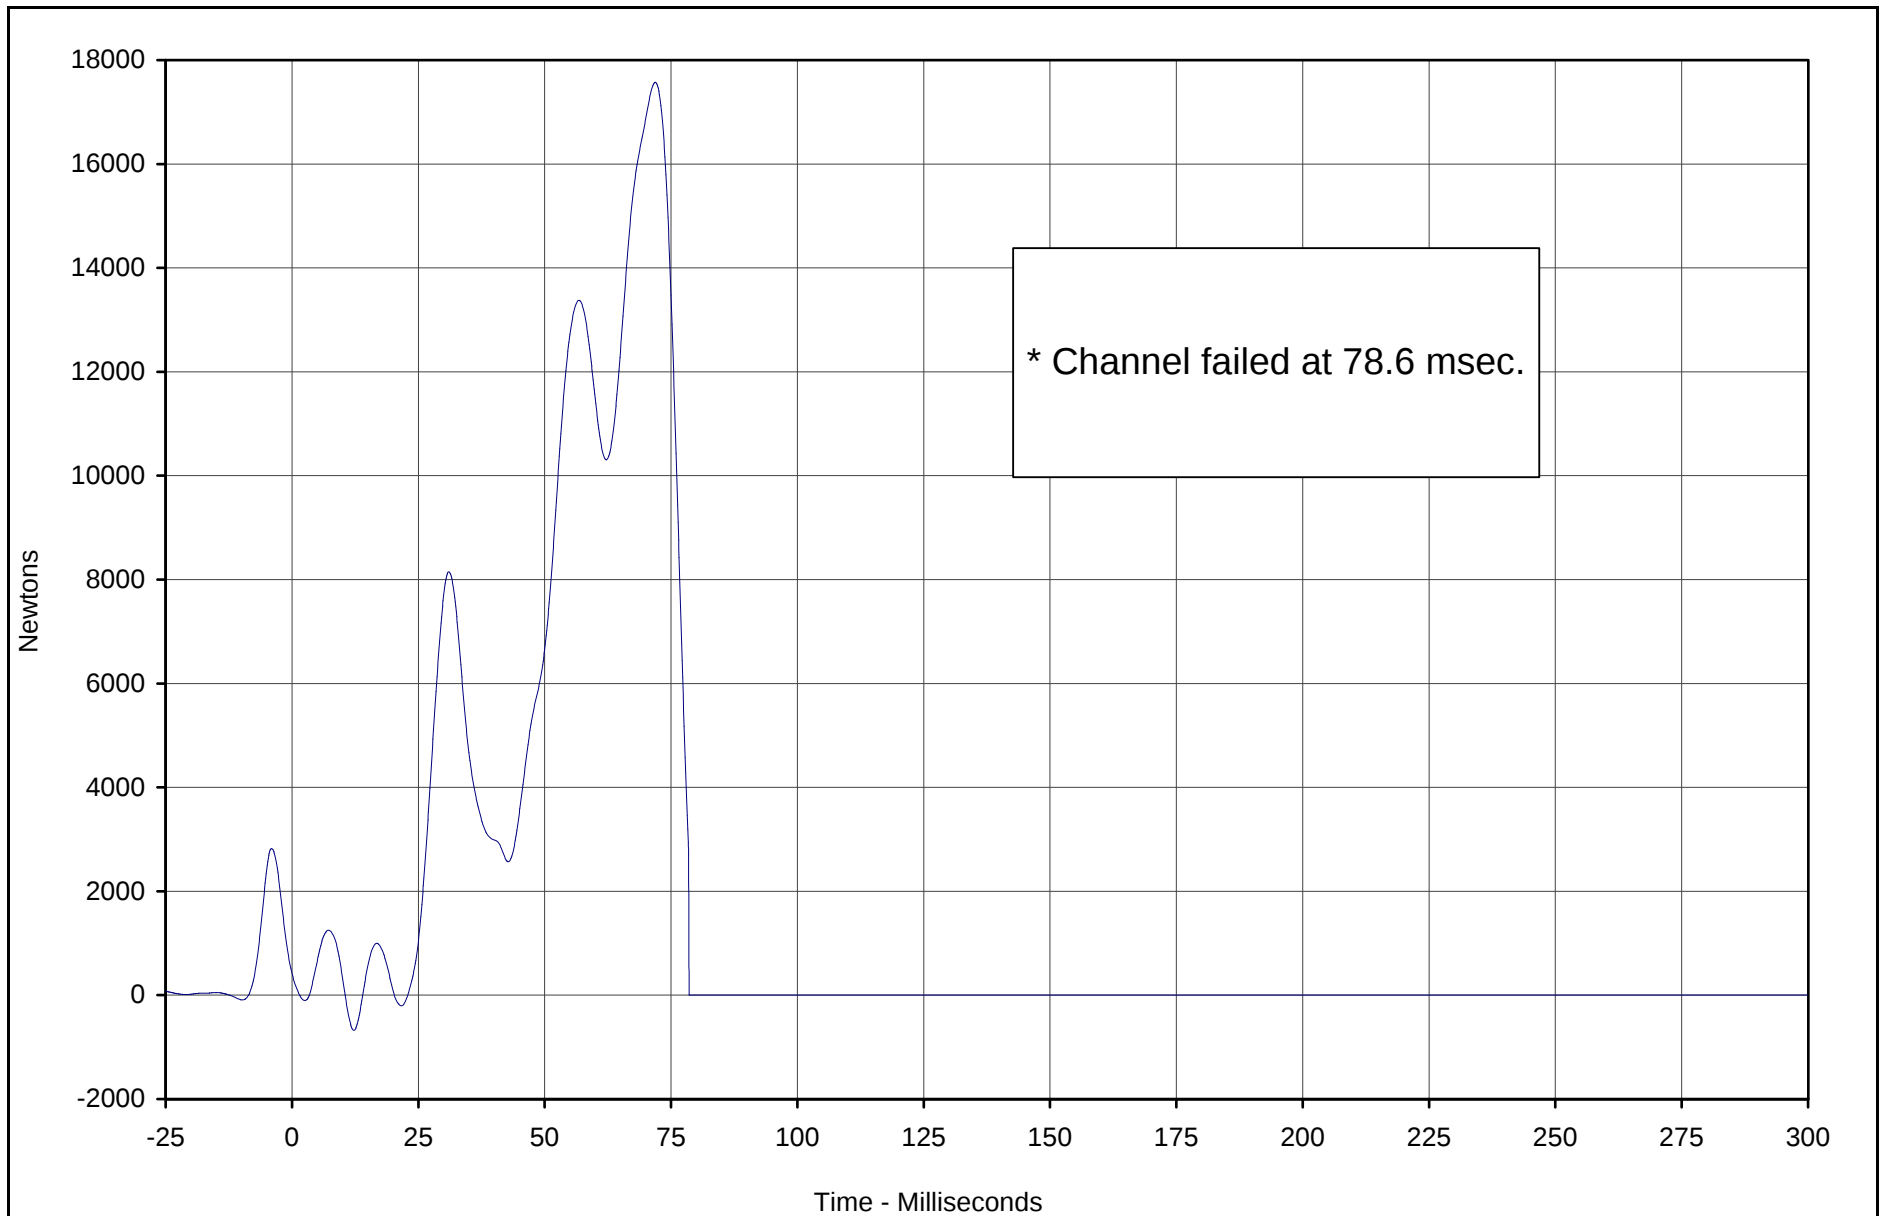

* Channel failed at 78.6 msec.

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force A5	102	FIL	Newtons	17572.1	71.9	-677.5	12.2	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

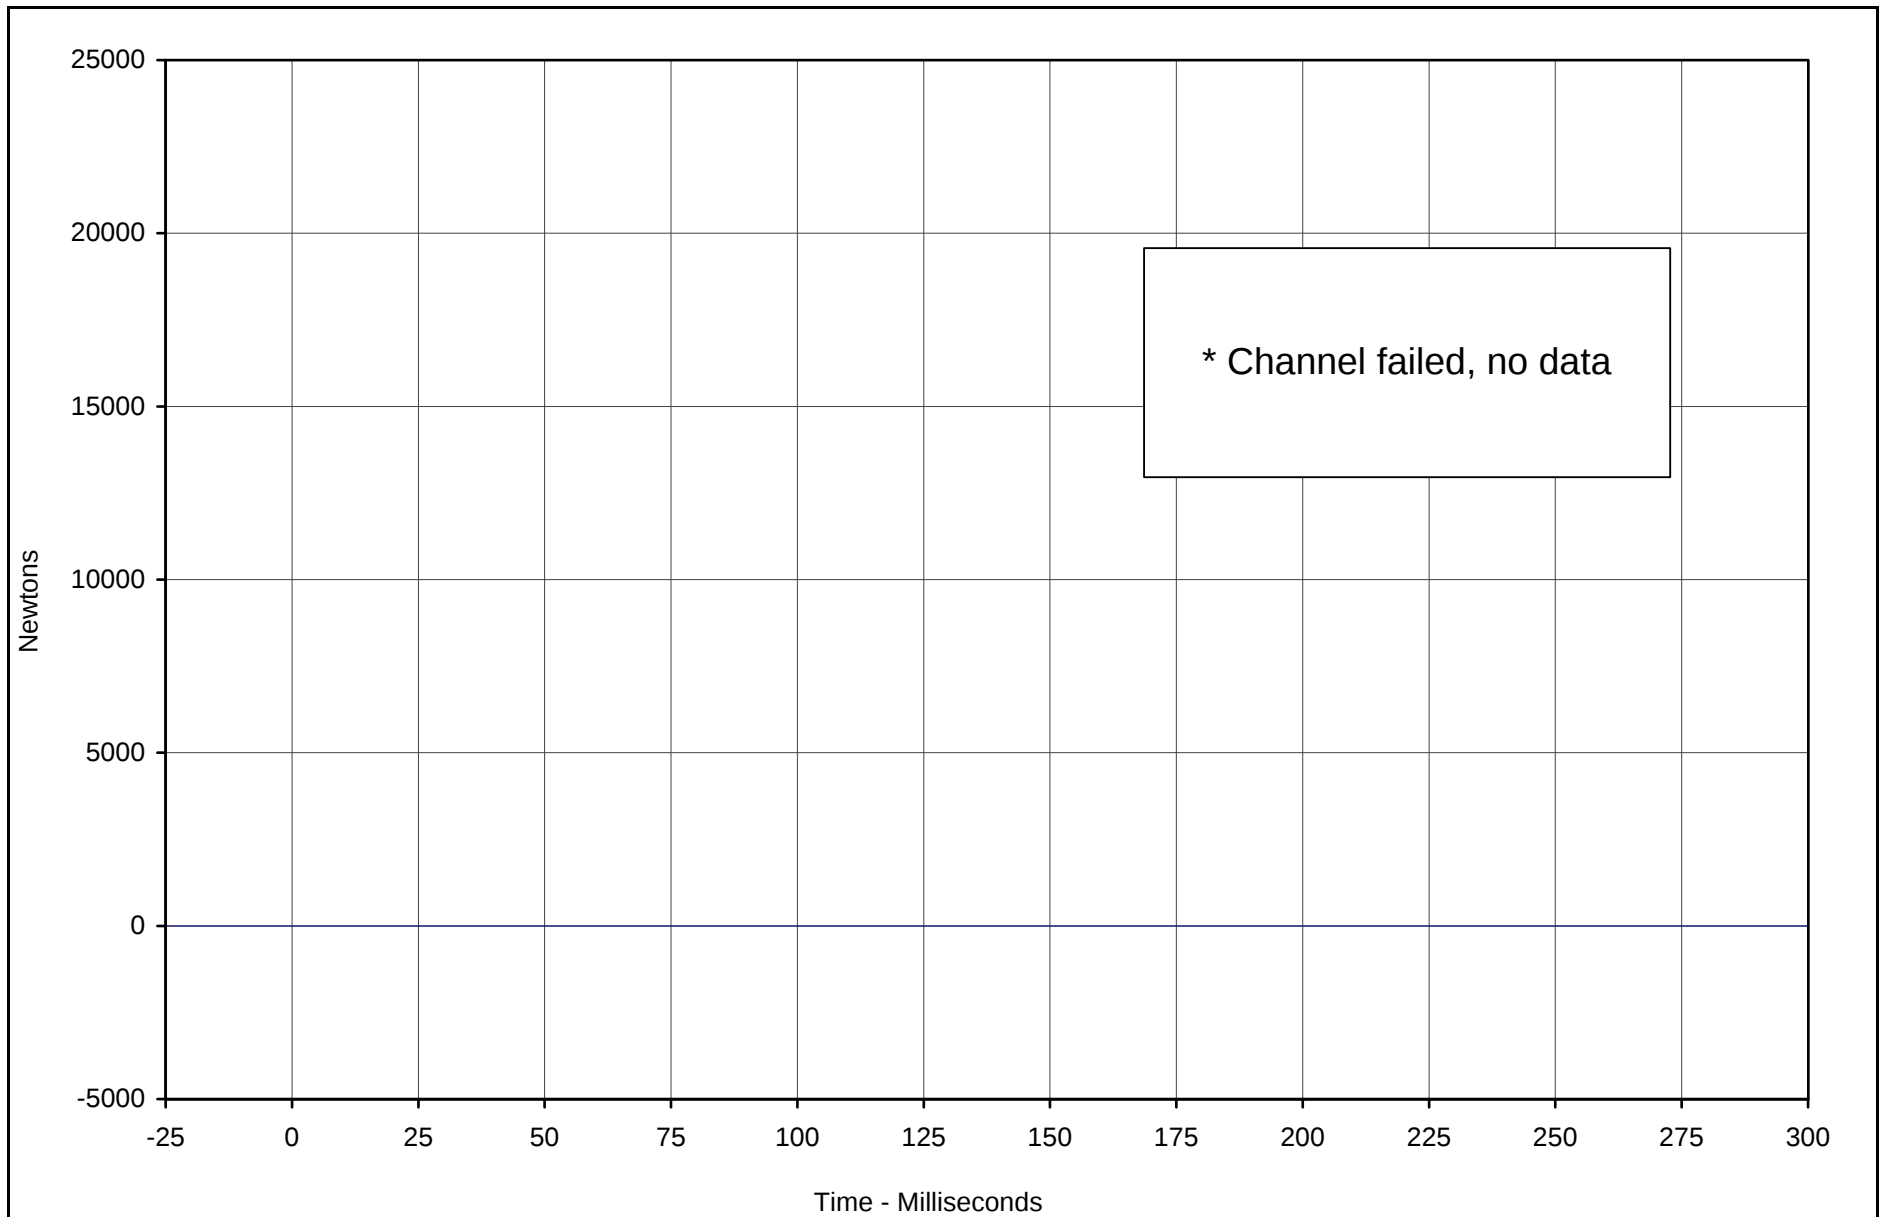

* Channel failed, no data

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force A6	103	FIL	Newtons	0.0	0.0	0.0	0.0	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

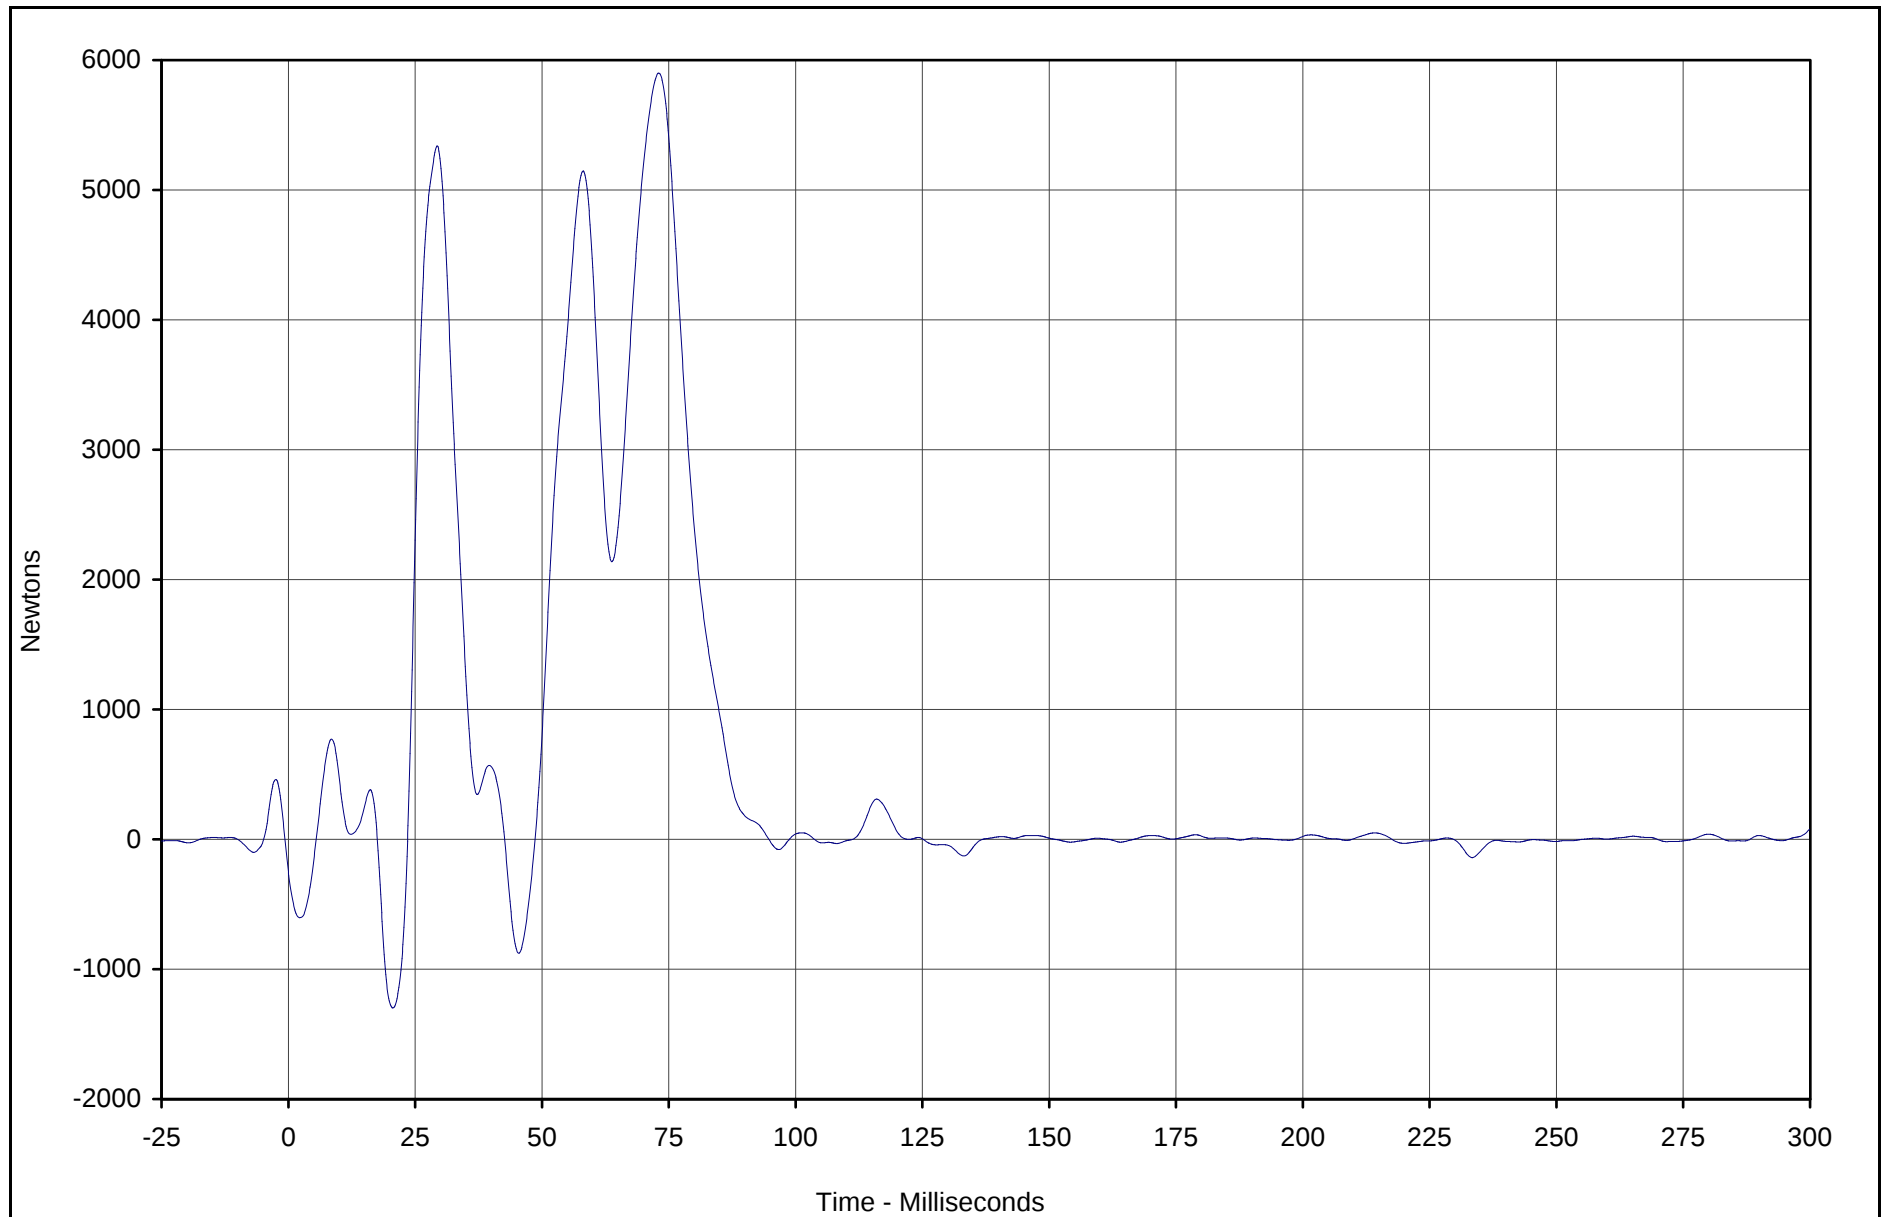

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force A7	104	FIL	Newtons	5900.4	73.0	-1298.5	20.6	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

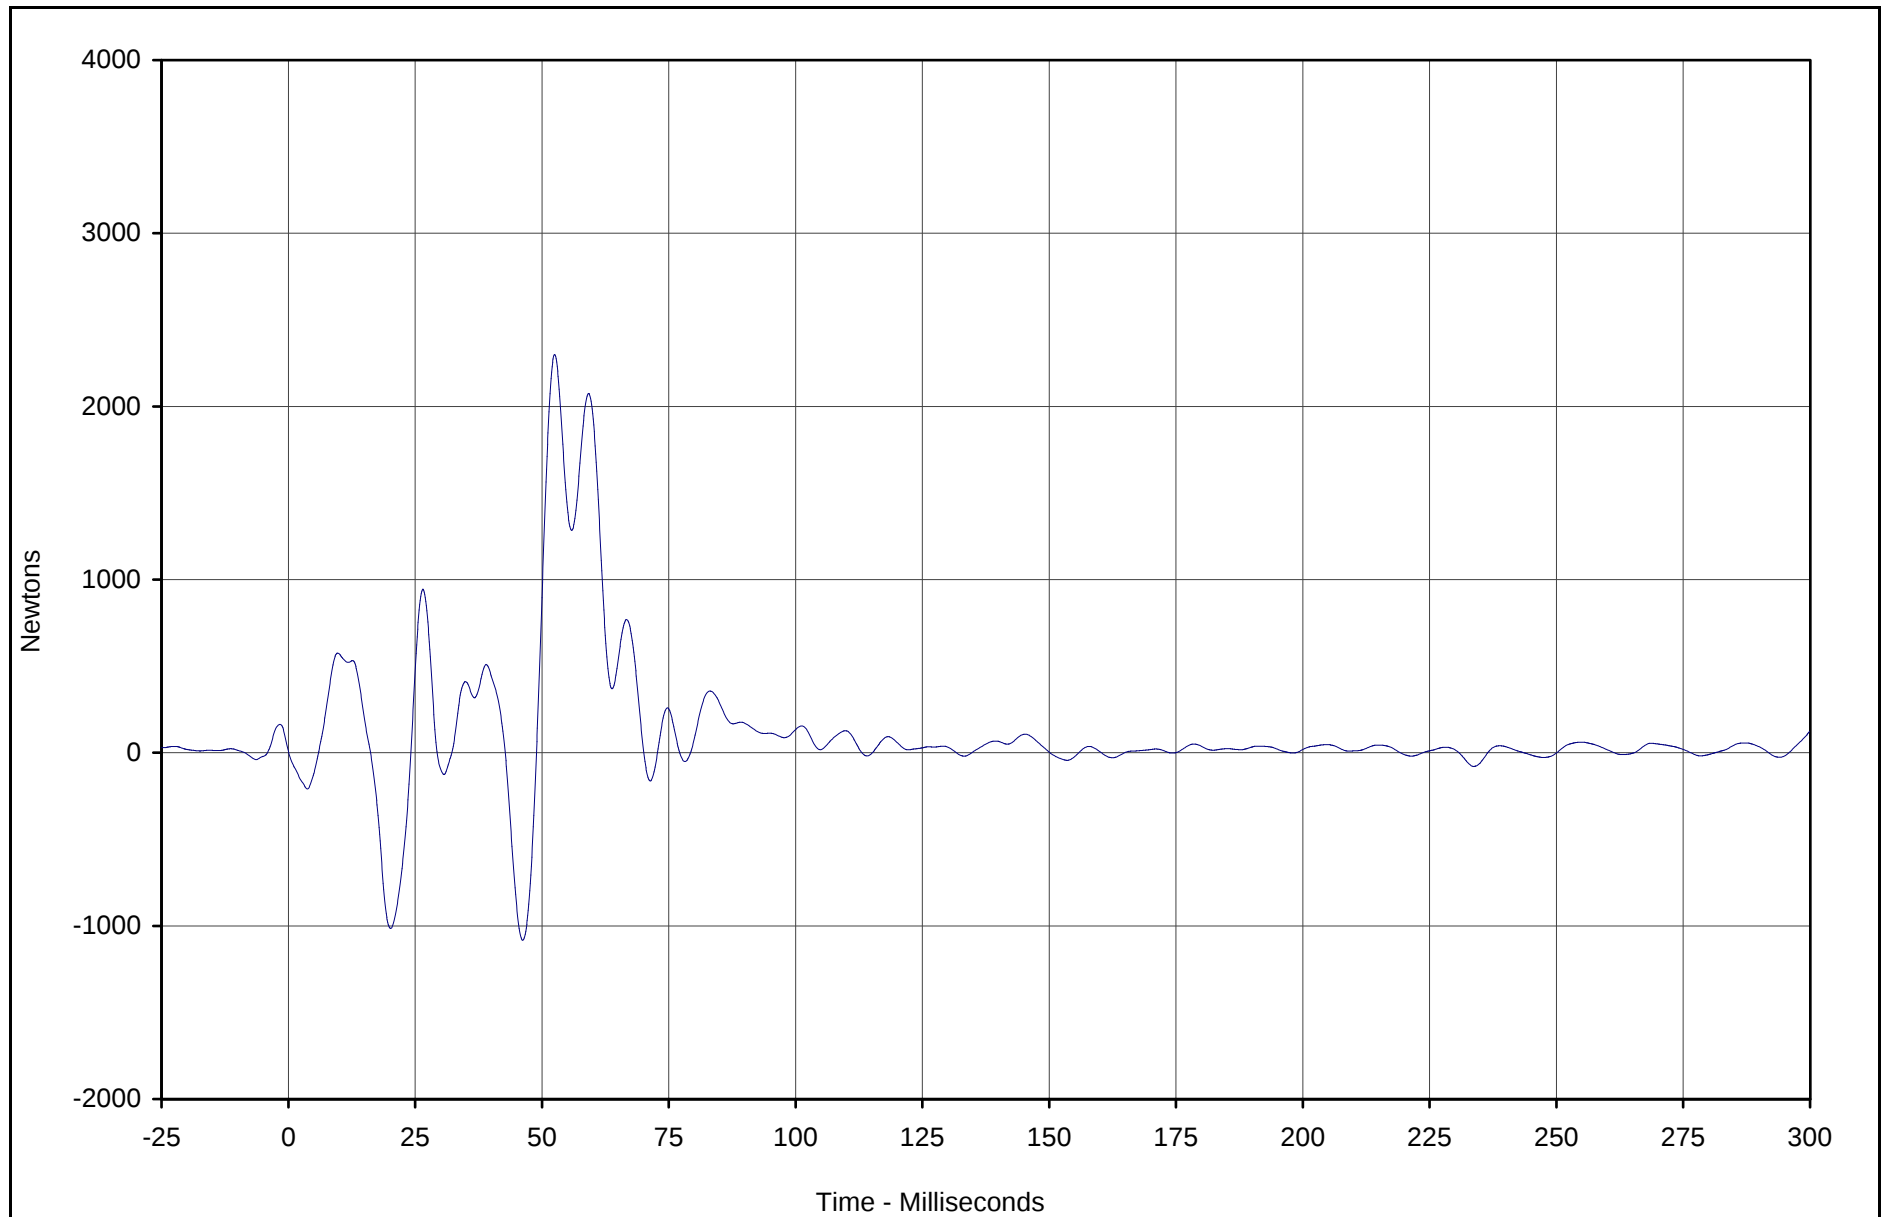

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force A8	105	FIL	Newtons	2299.8	52.5	-1083.1	46.2	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

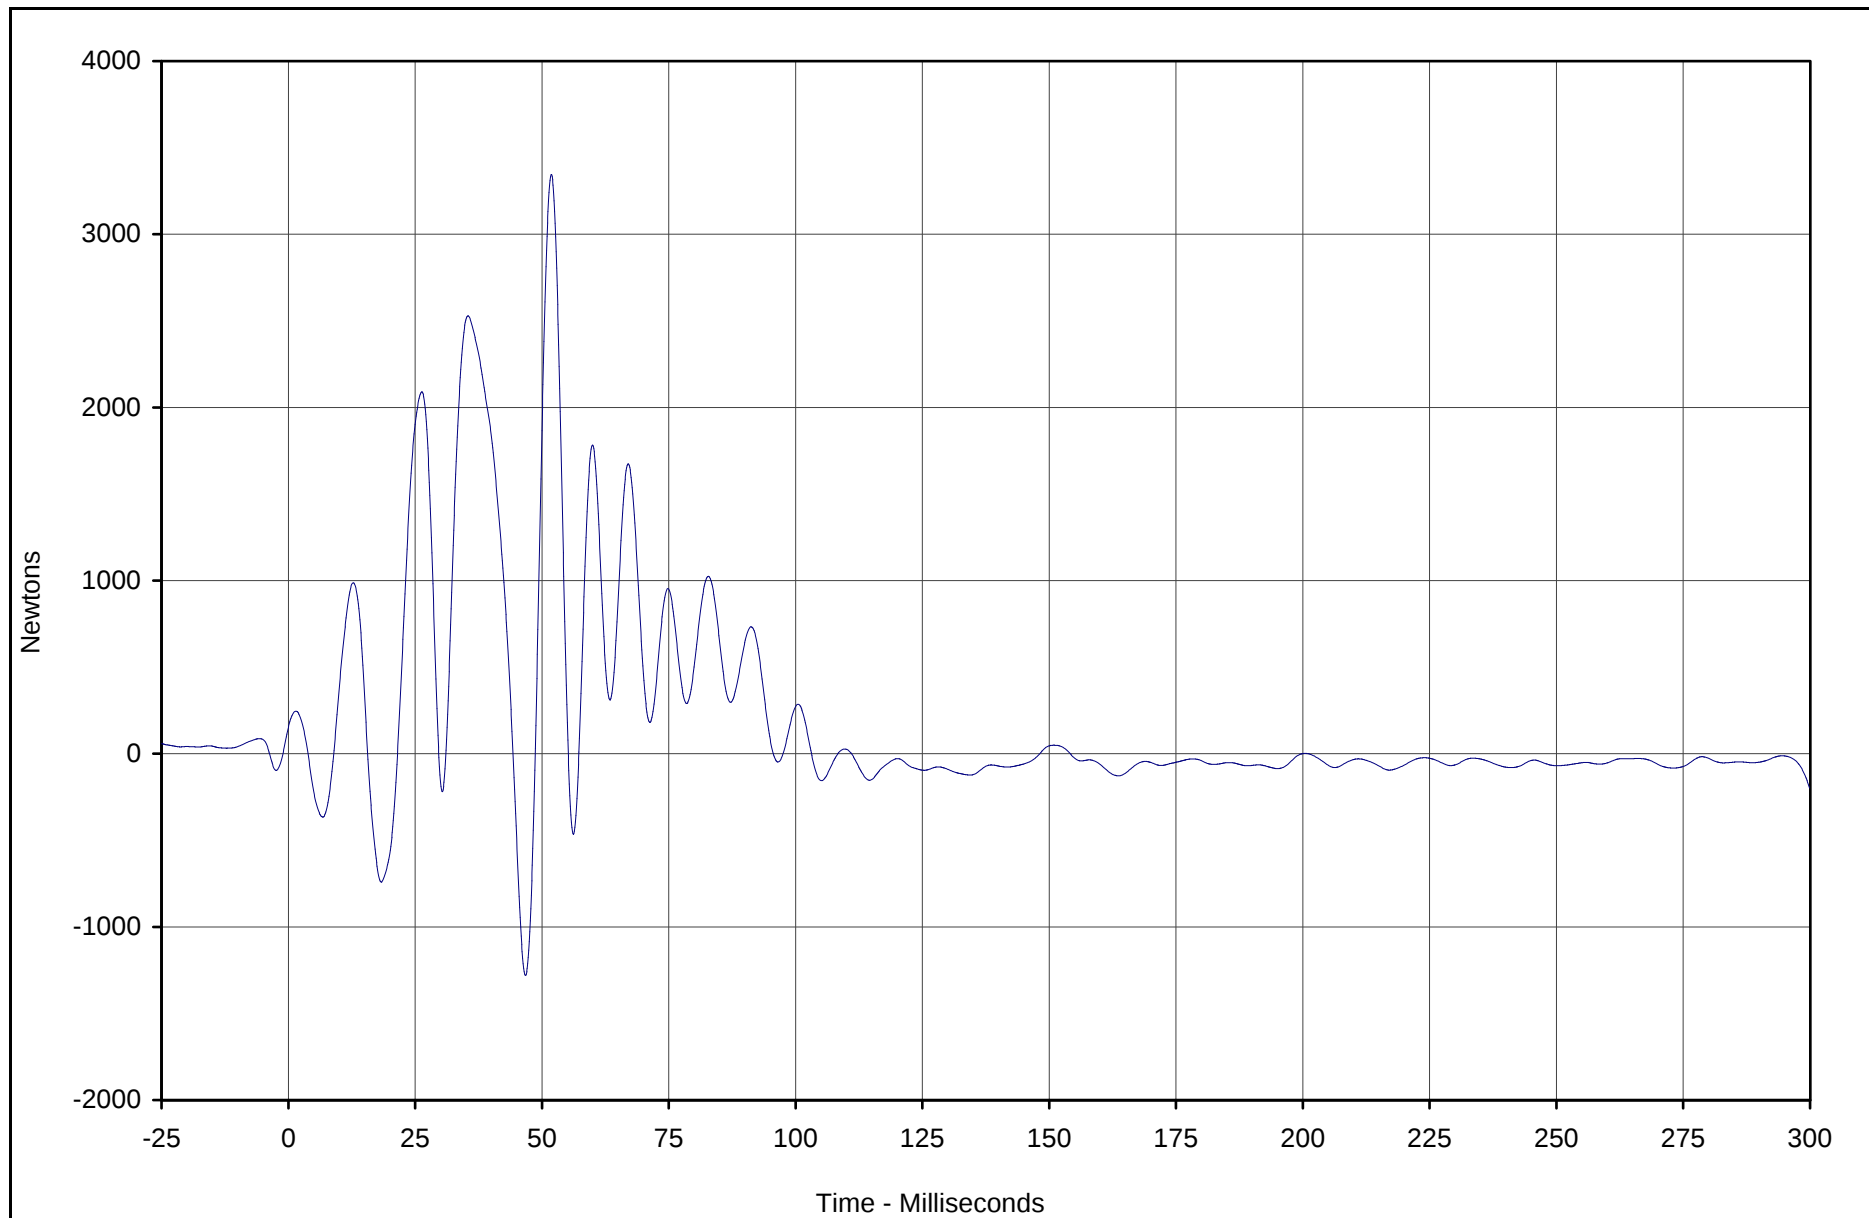

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force A9	106	FIL	Newtons	3344.1	51.9	-1279.7	46.8	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

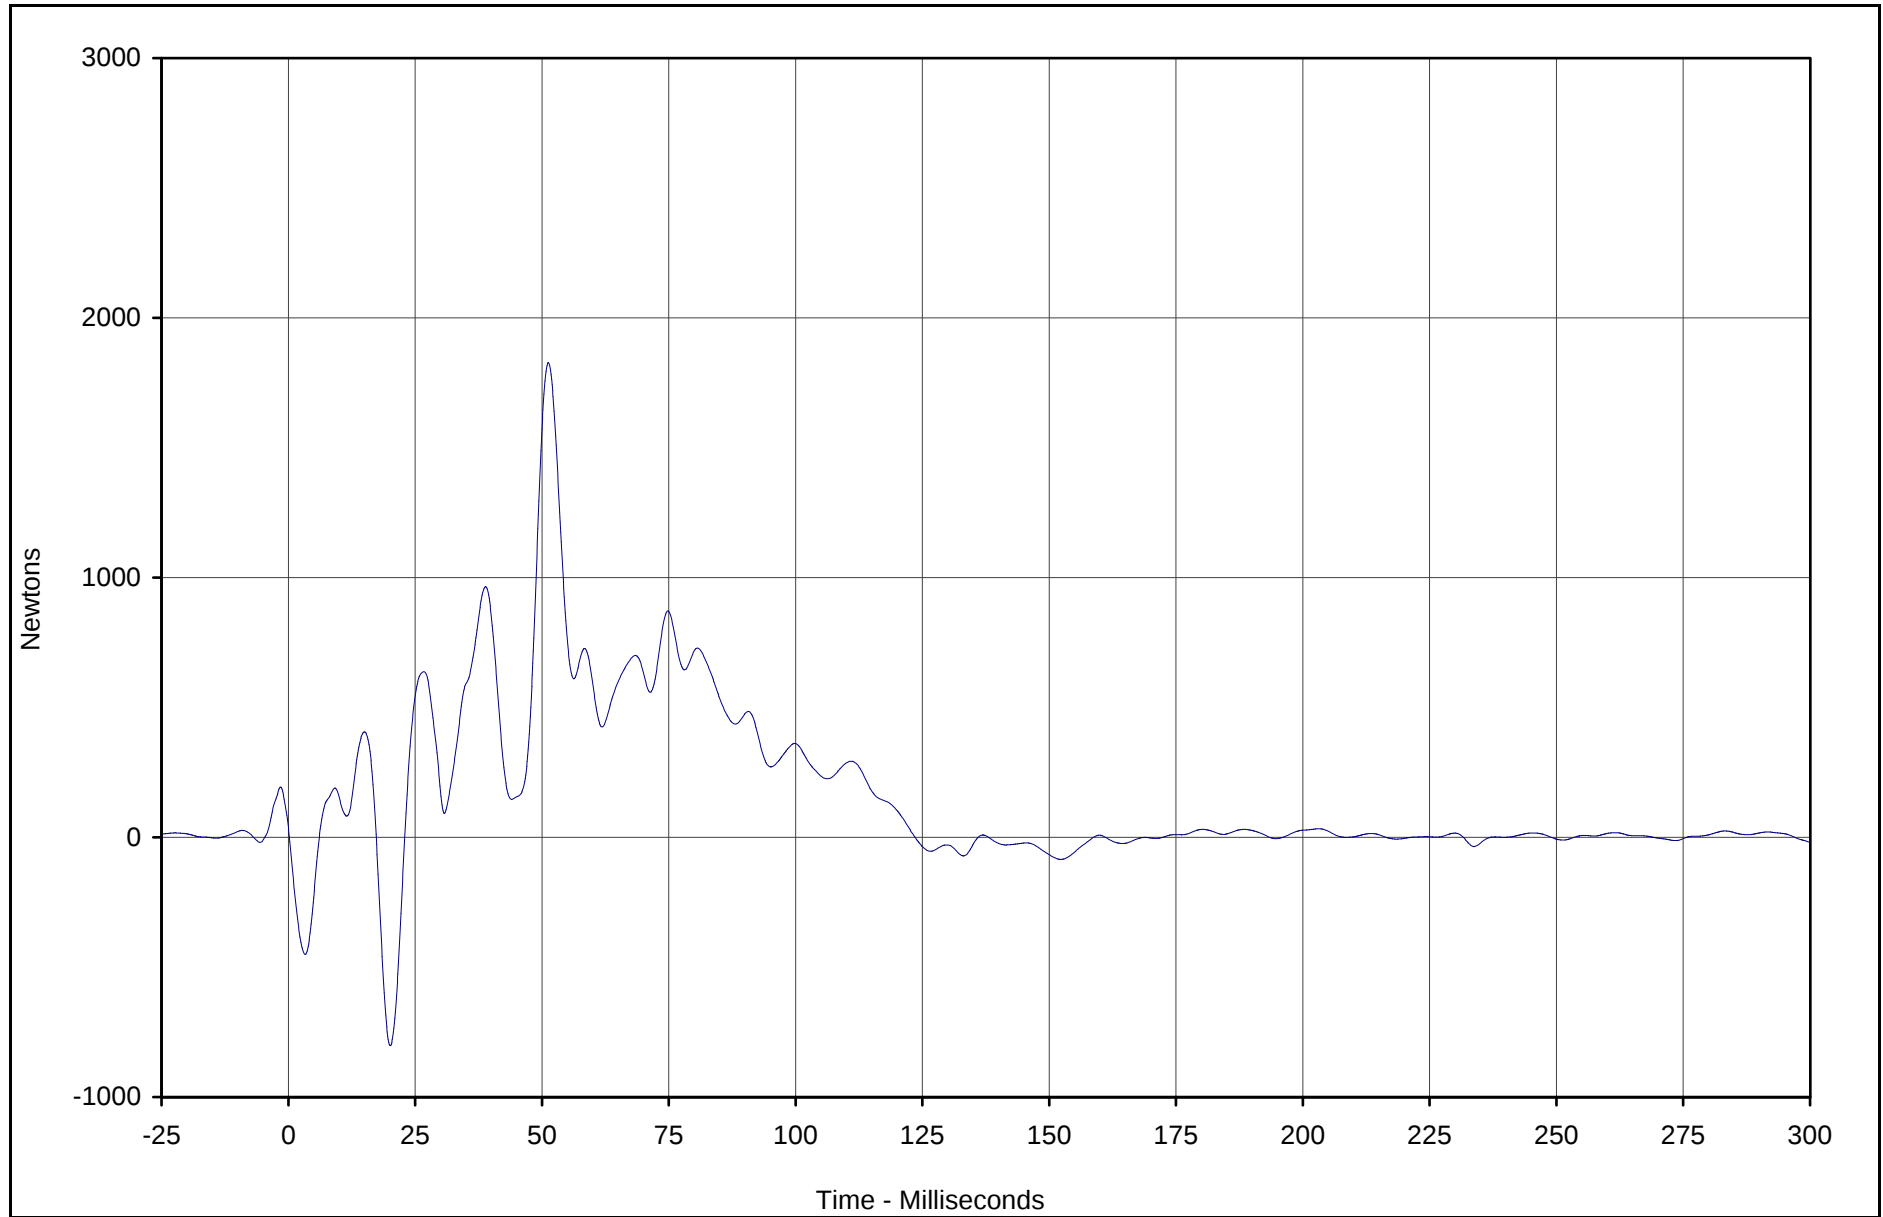

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force B1	107	FIL	Newtons	1827.2	51.3	-802.2	20.1	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

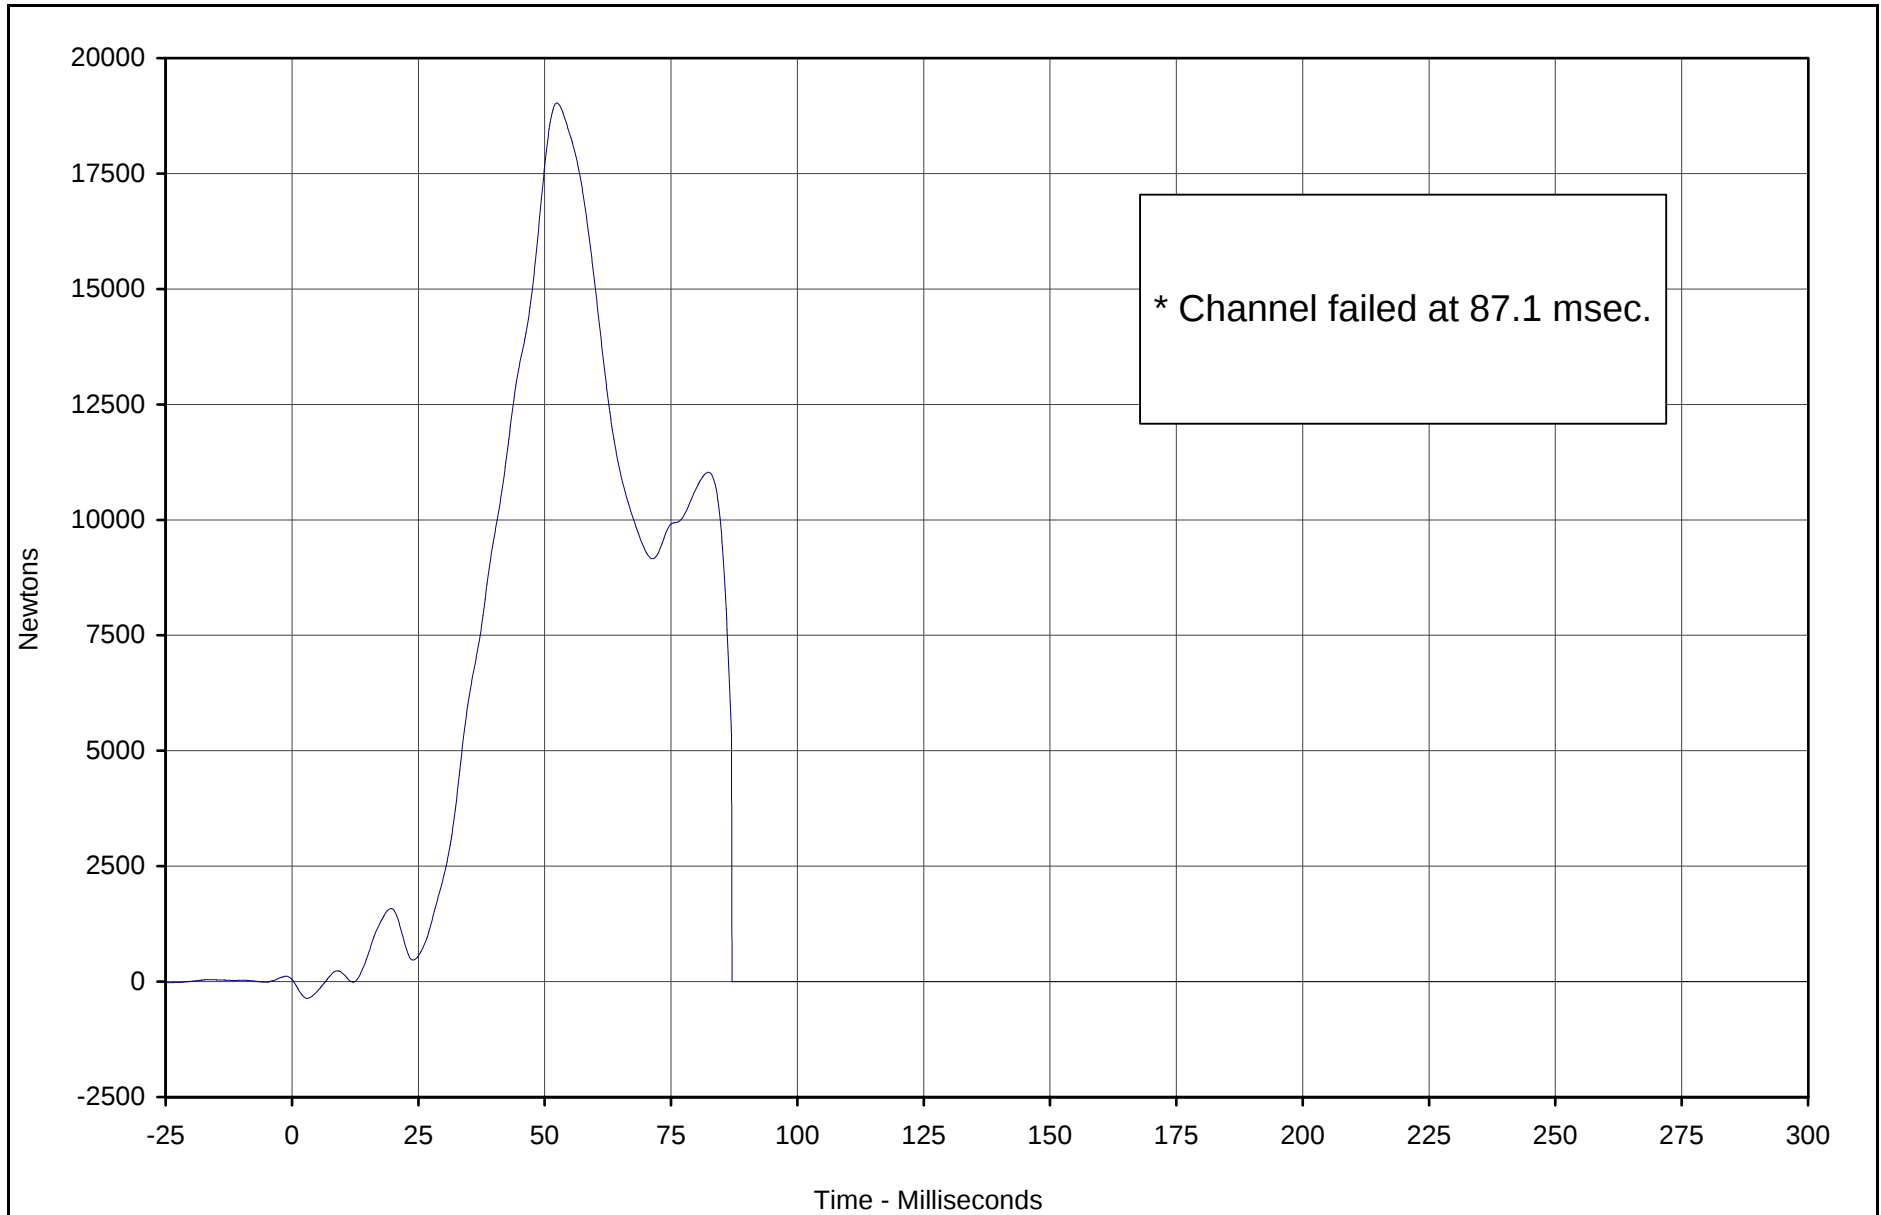

* Channel failed at 87.1 msec.

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force B2	108	FIL	Newtons	19027.9	52.4	-364.6	3.0	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

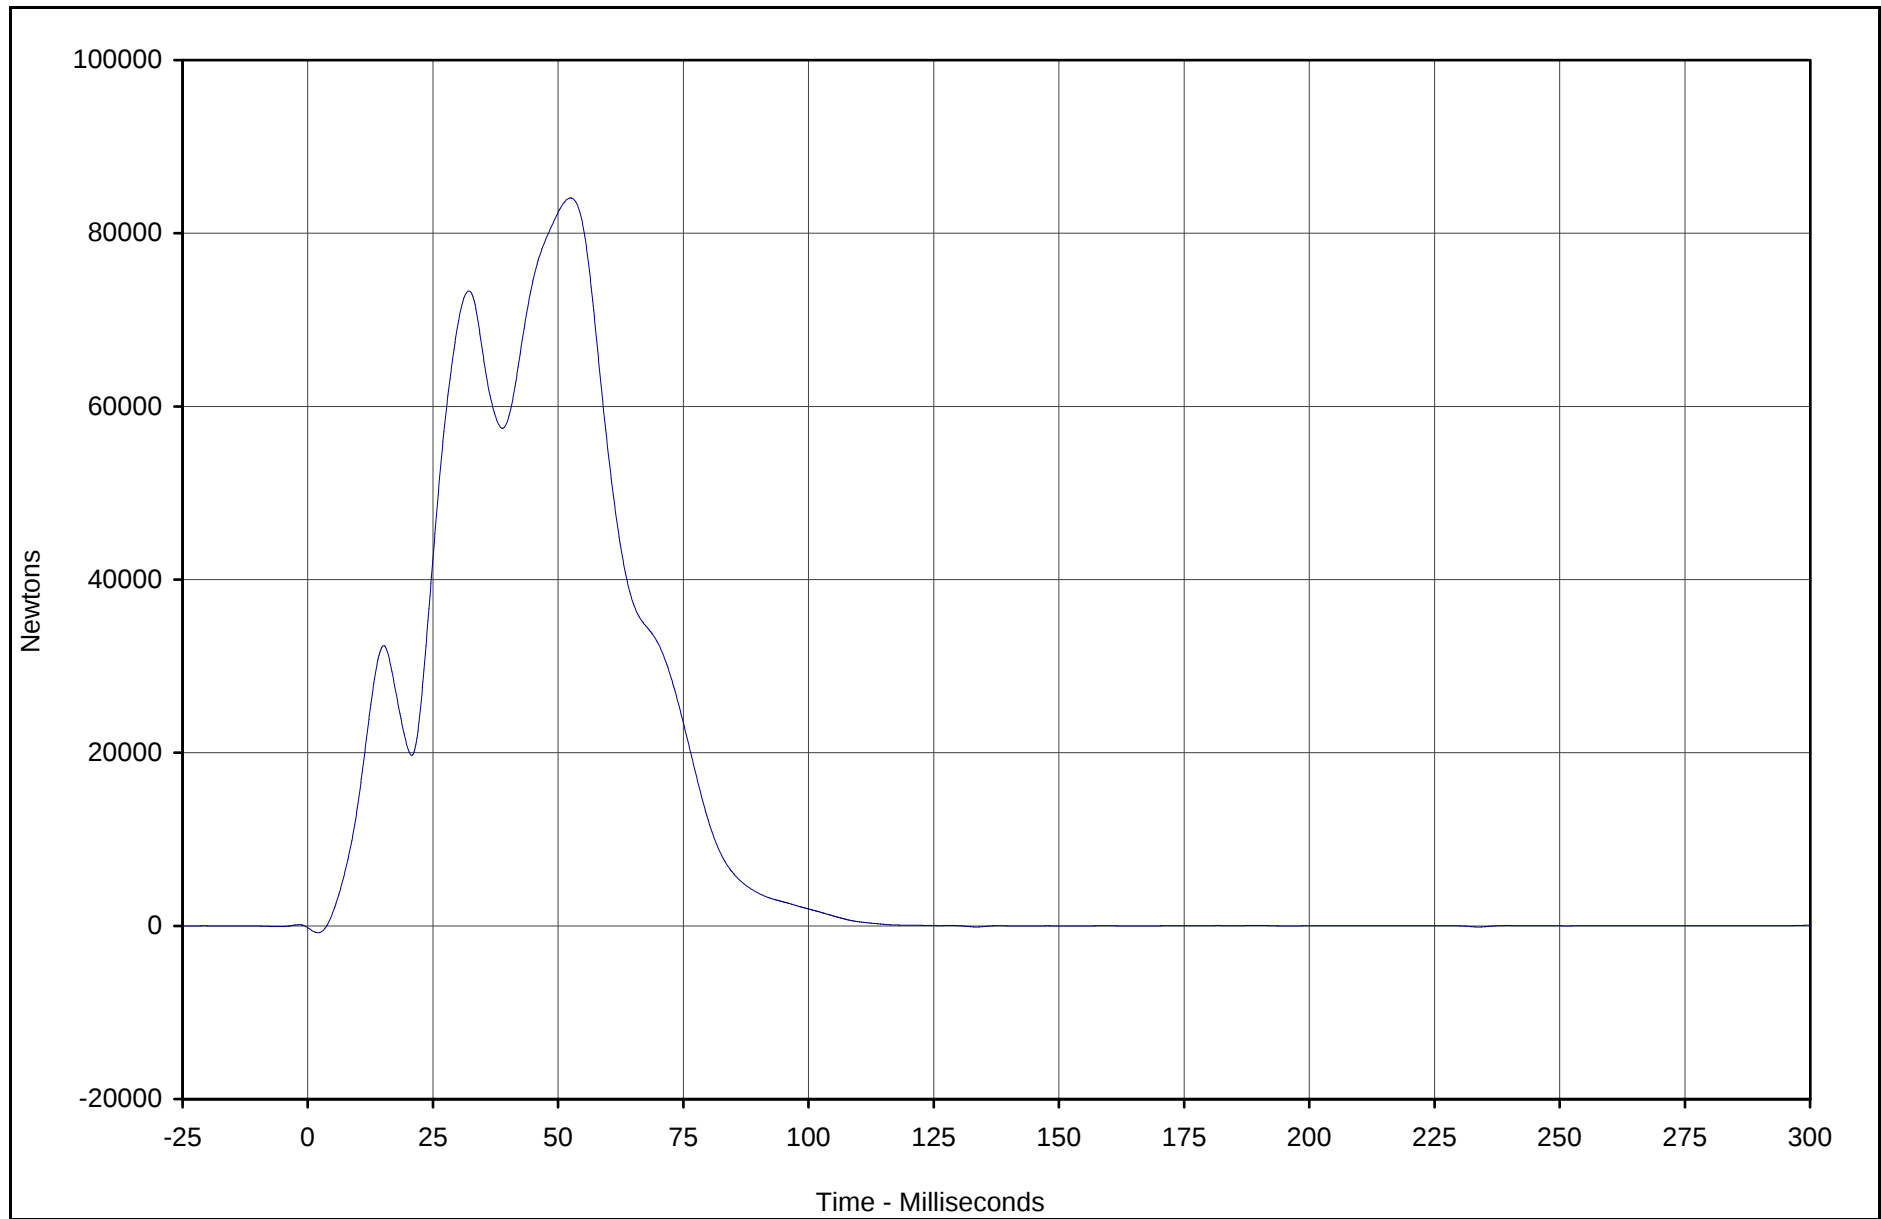

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force B3	109	FIL	Newtons	84070.3	52.5	-785.1	2.1	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

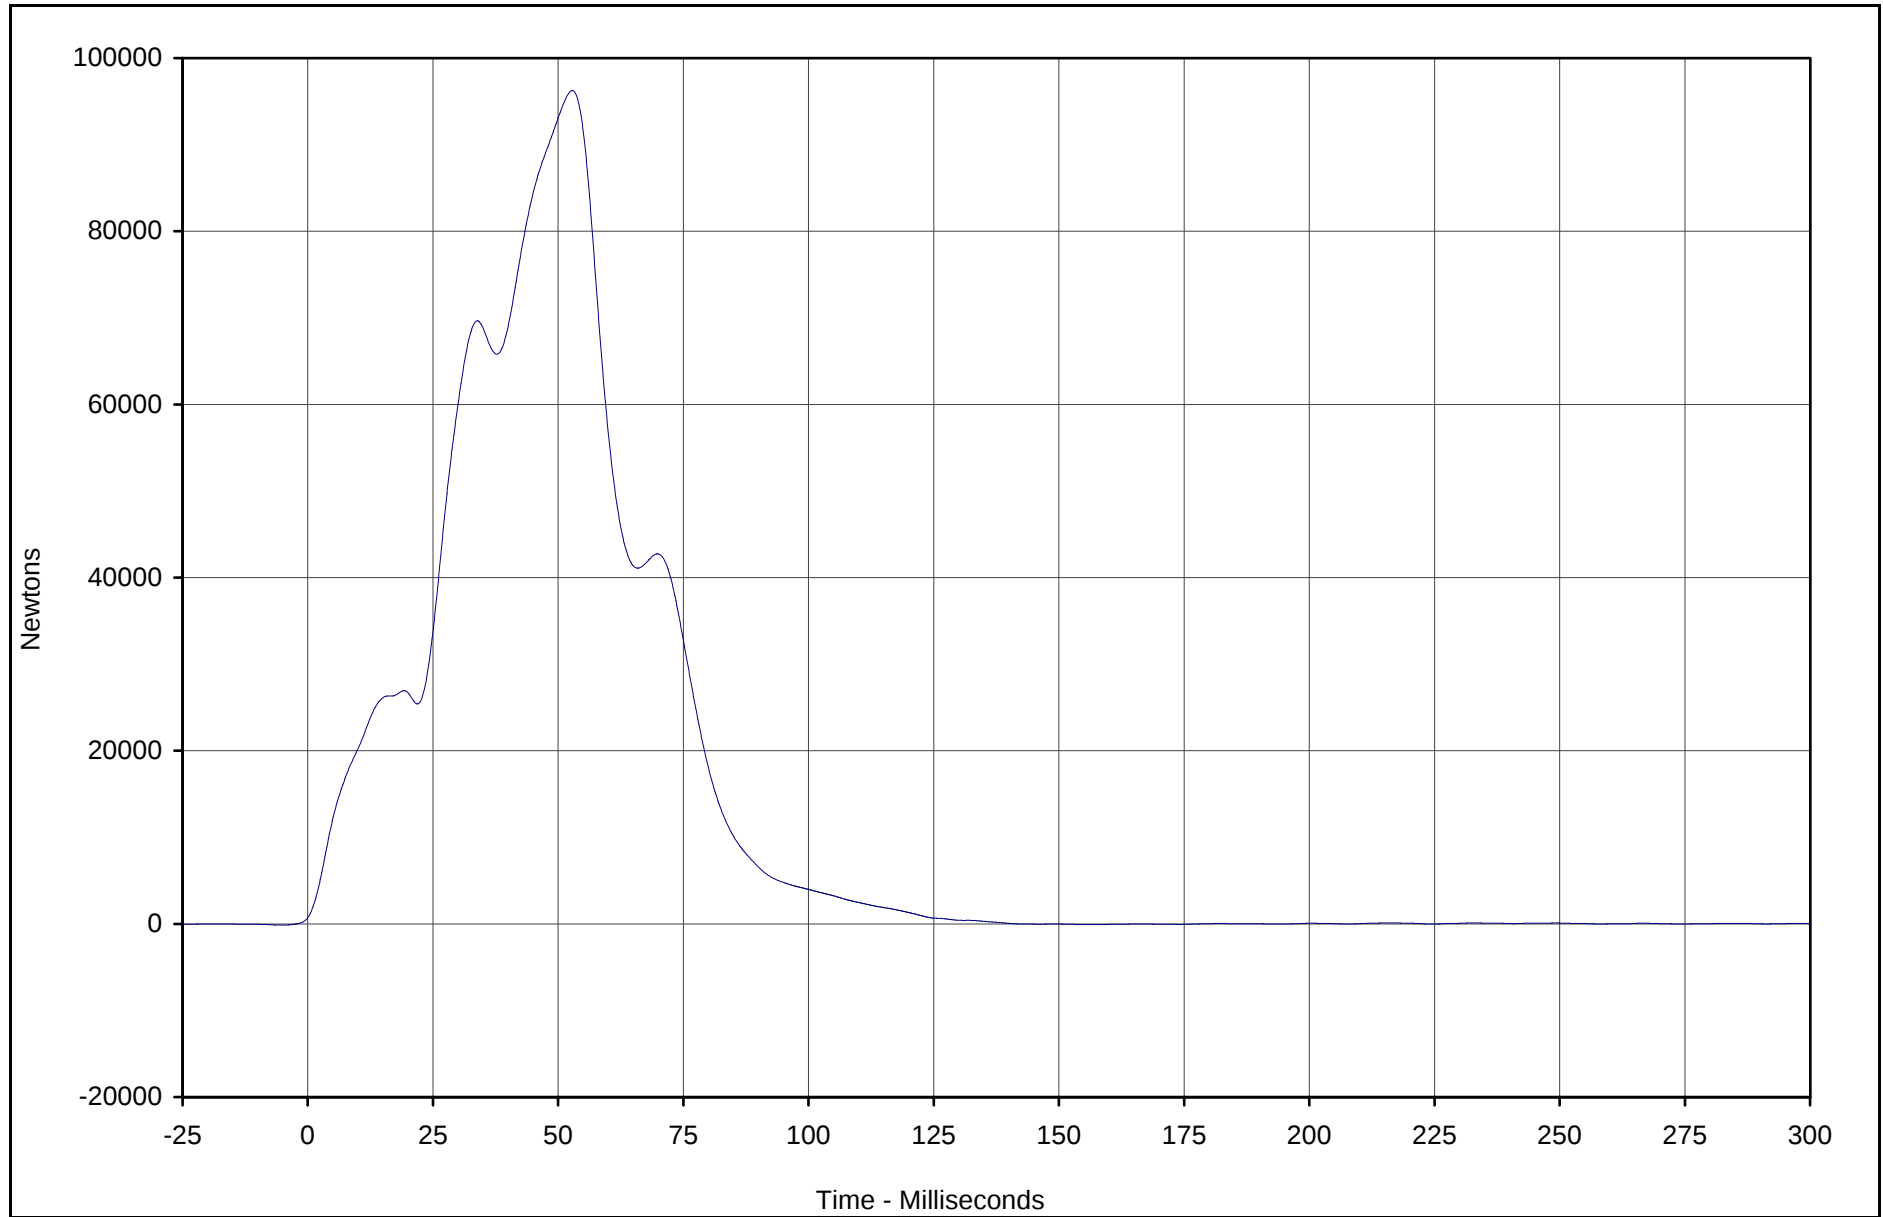

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force B4	110	FIL	Newtons	96258.0	52.8	-84.7	157.8	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

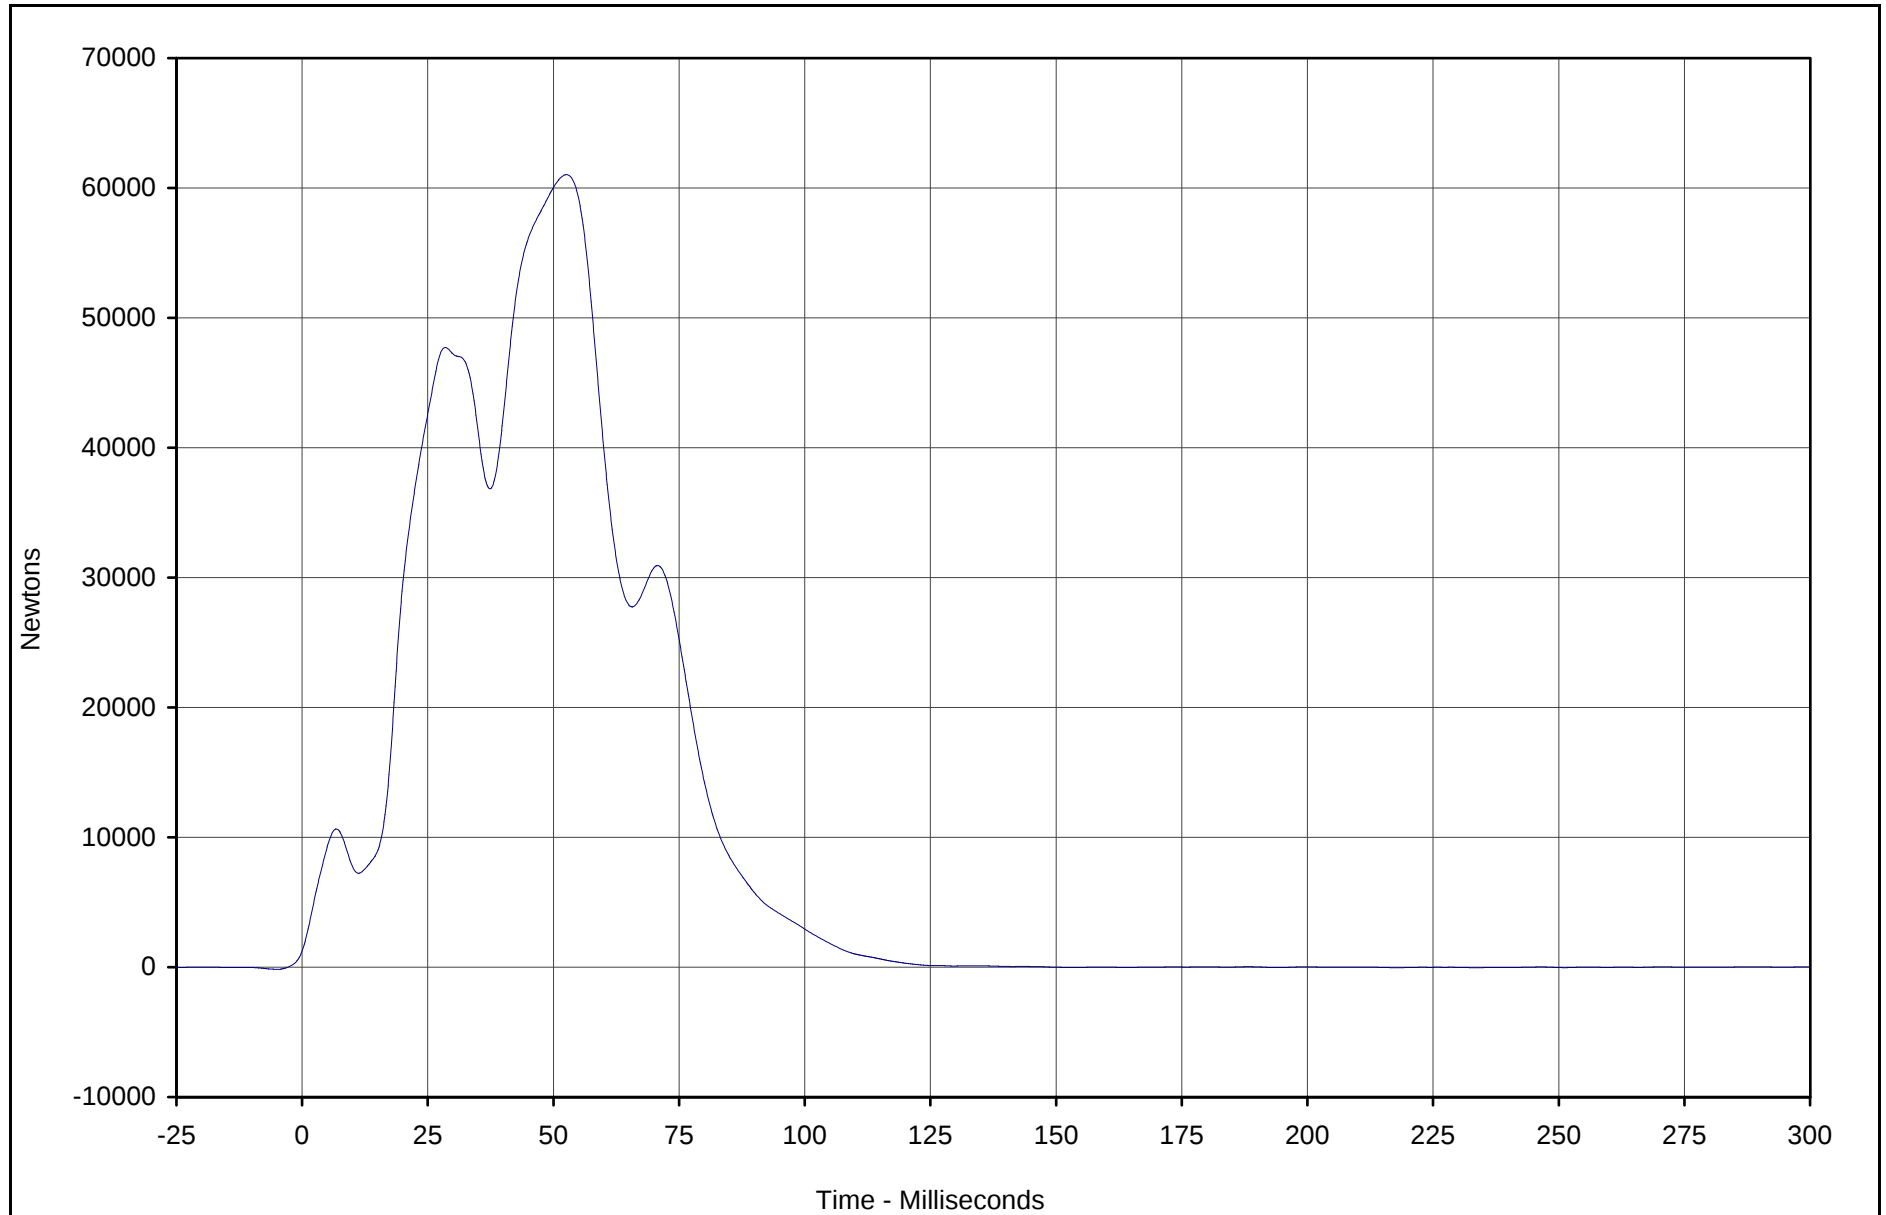

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force B5	111	FIL	Newtons	61027.3	52.6	-42.3	233.8	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

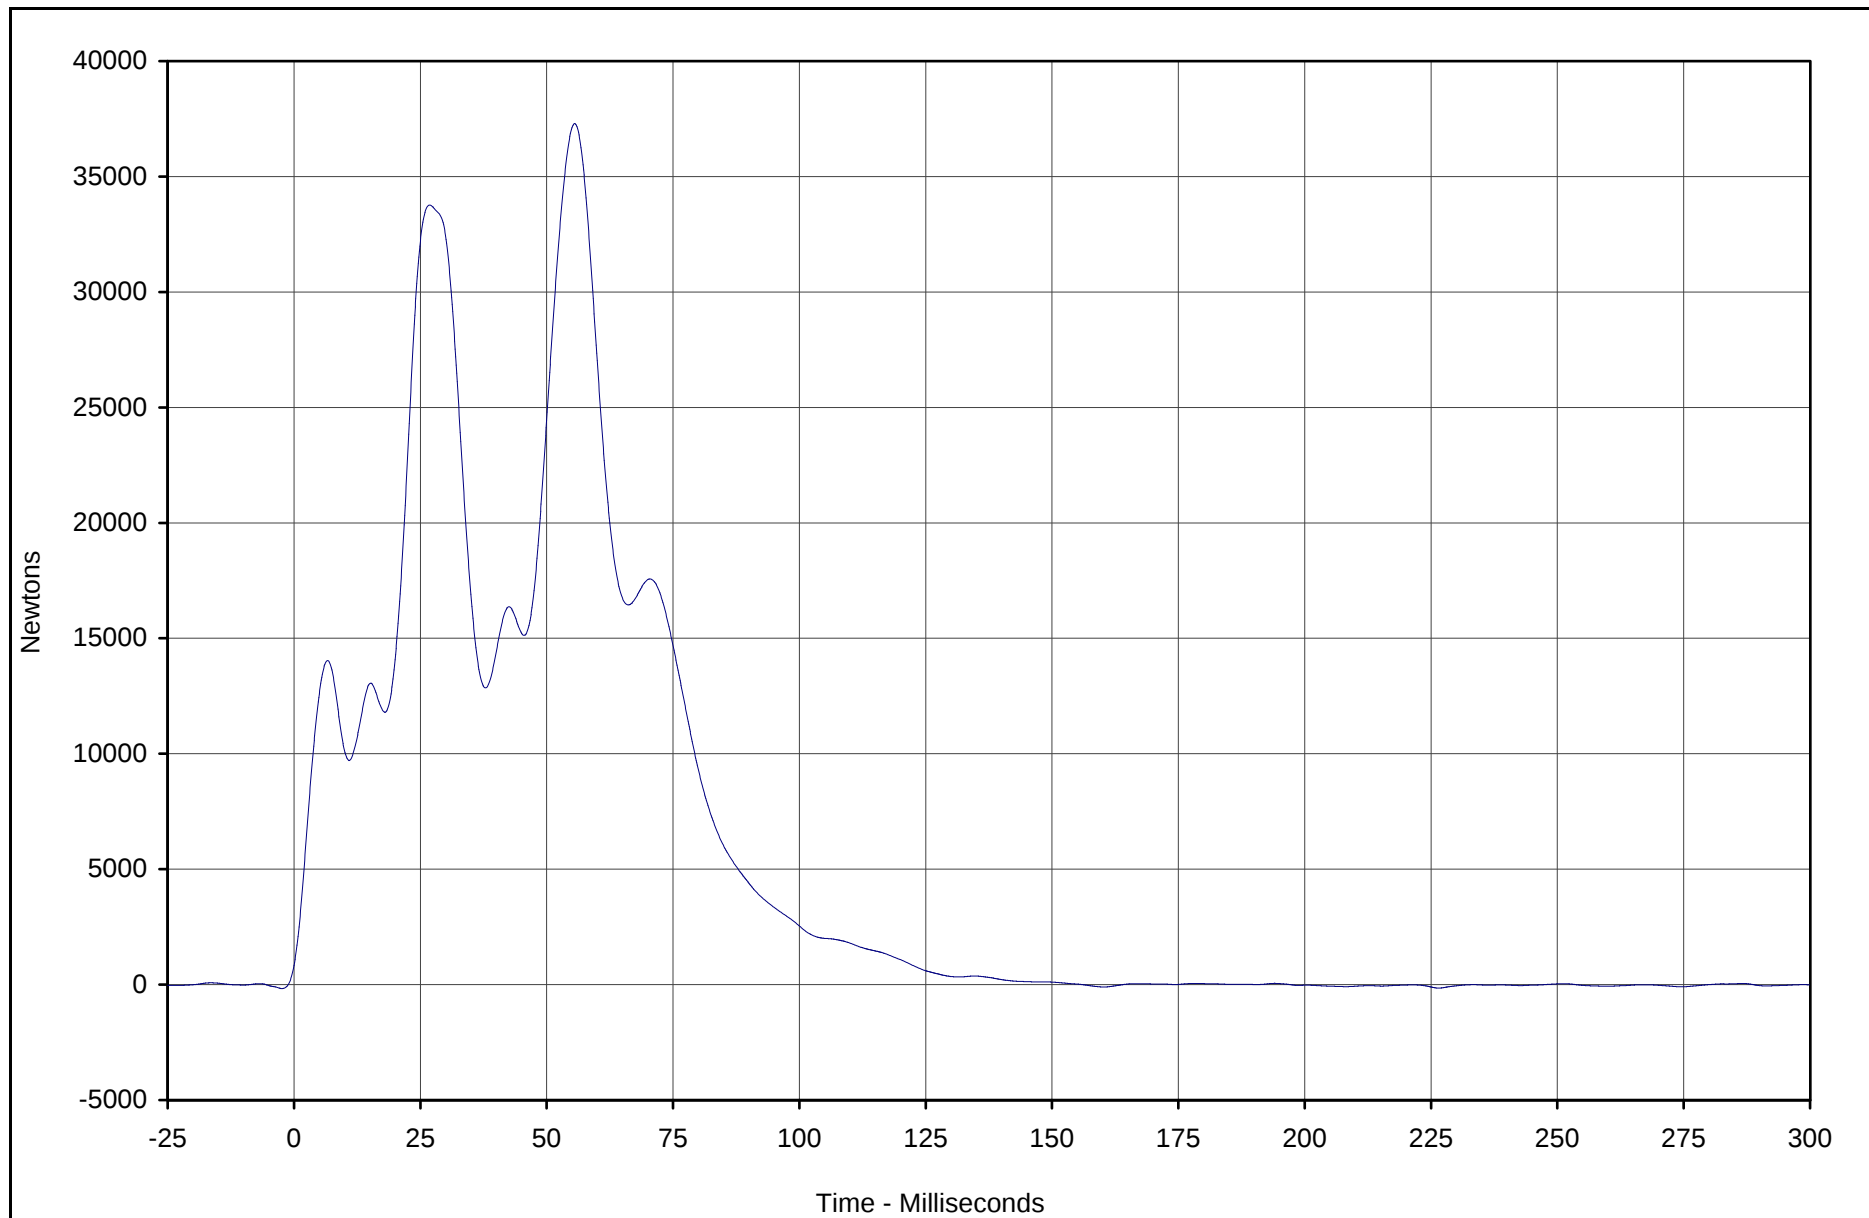

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force B6	112	FIL	Newtons	37293.4	55.5	-150.4	226.5	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

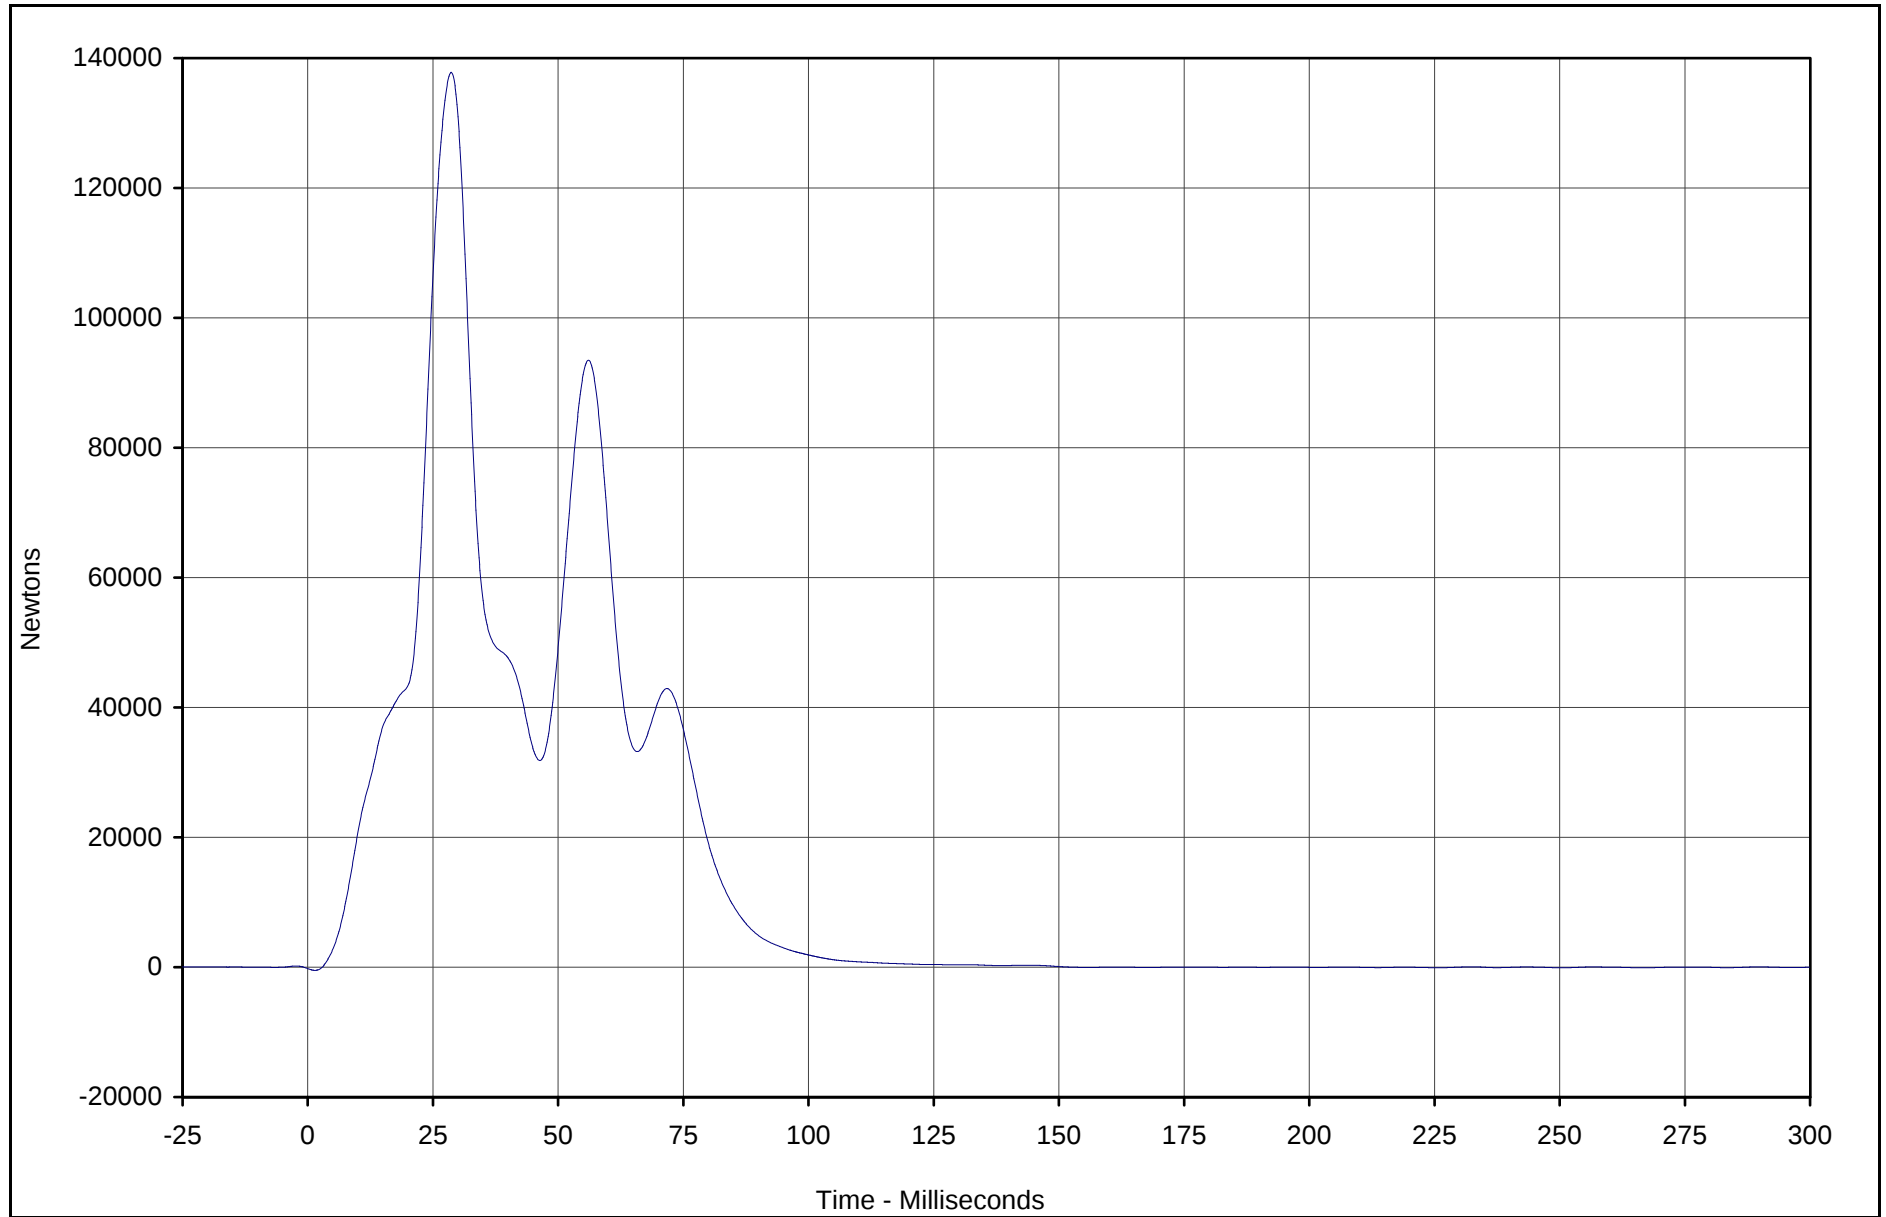

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force B7	113	FIL	Newtons	137806.2	28.6	-490.5	1.4	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

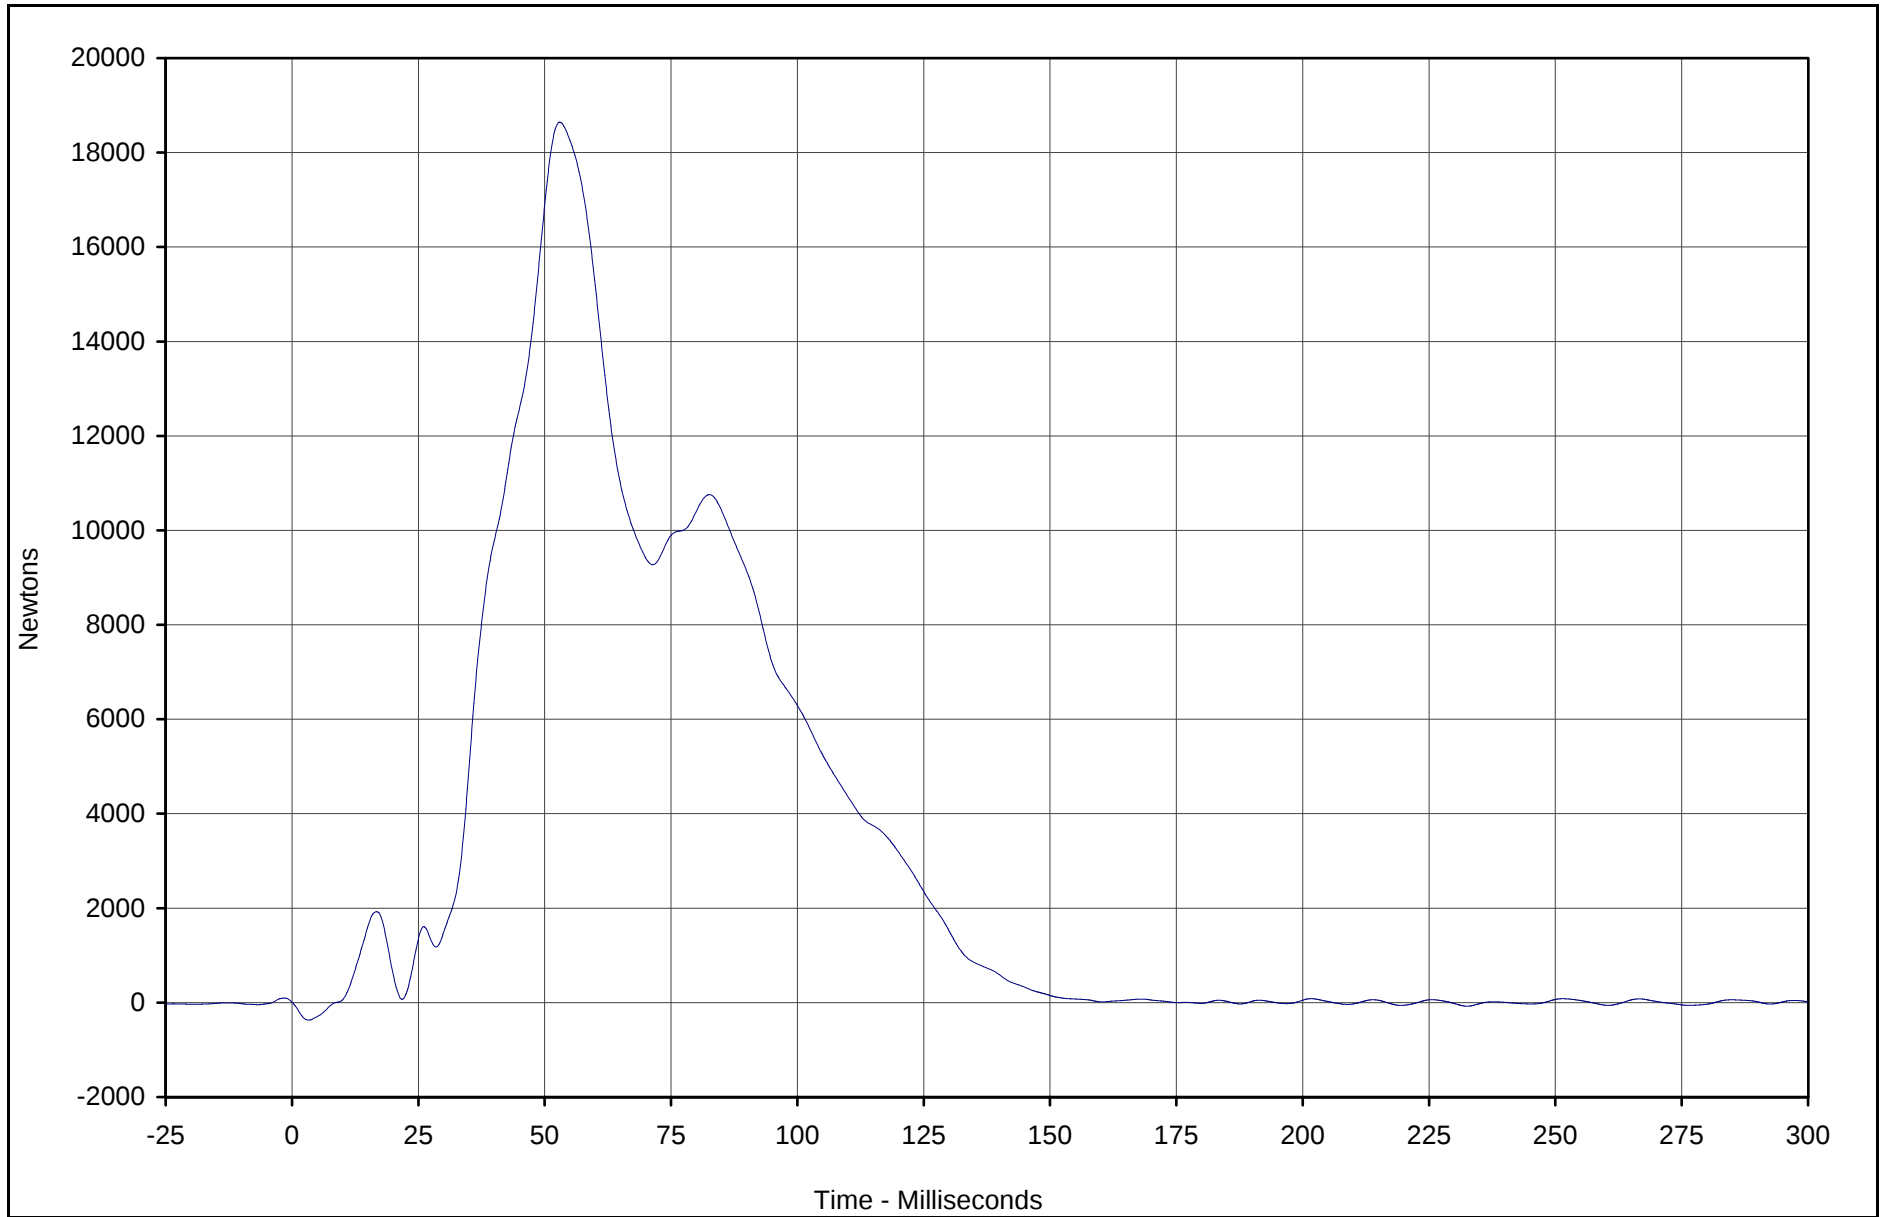

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force B8	114	FIL	Newtons	18642.6	53.0	-369.6	3.3	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

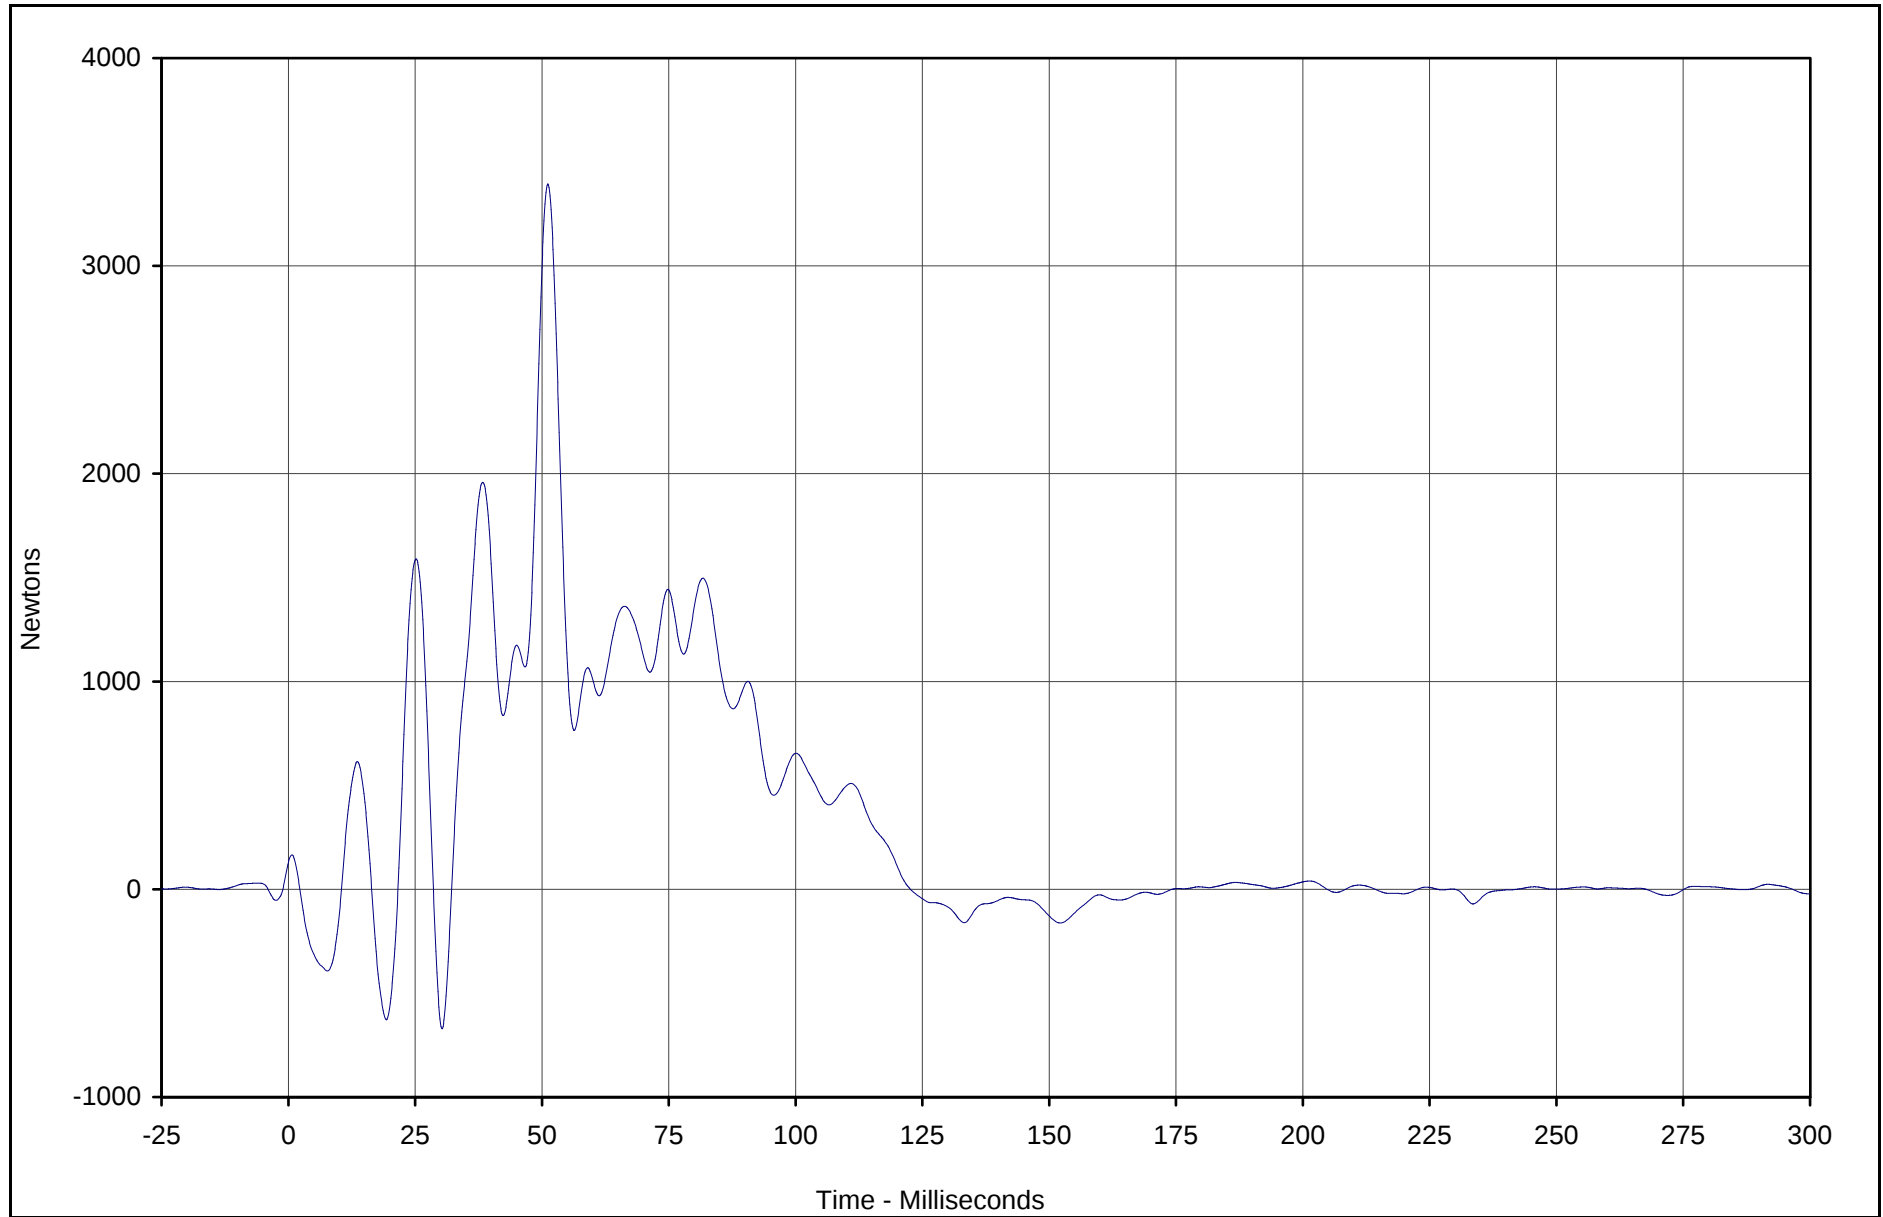

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force B9	115	FIL	Newtons	3394.2	51.2	-671.4	30.3	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

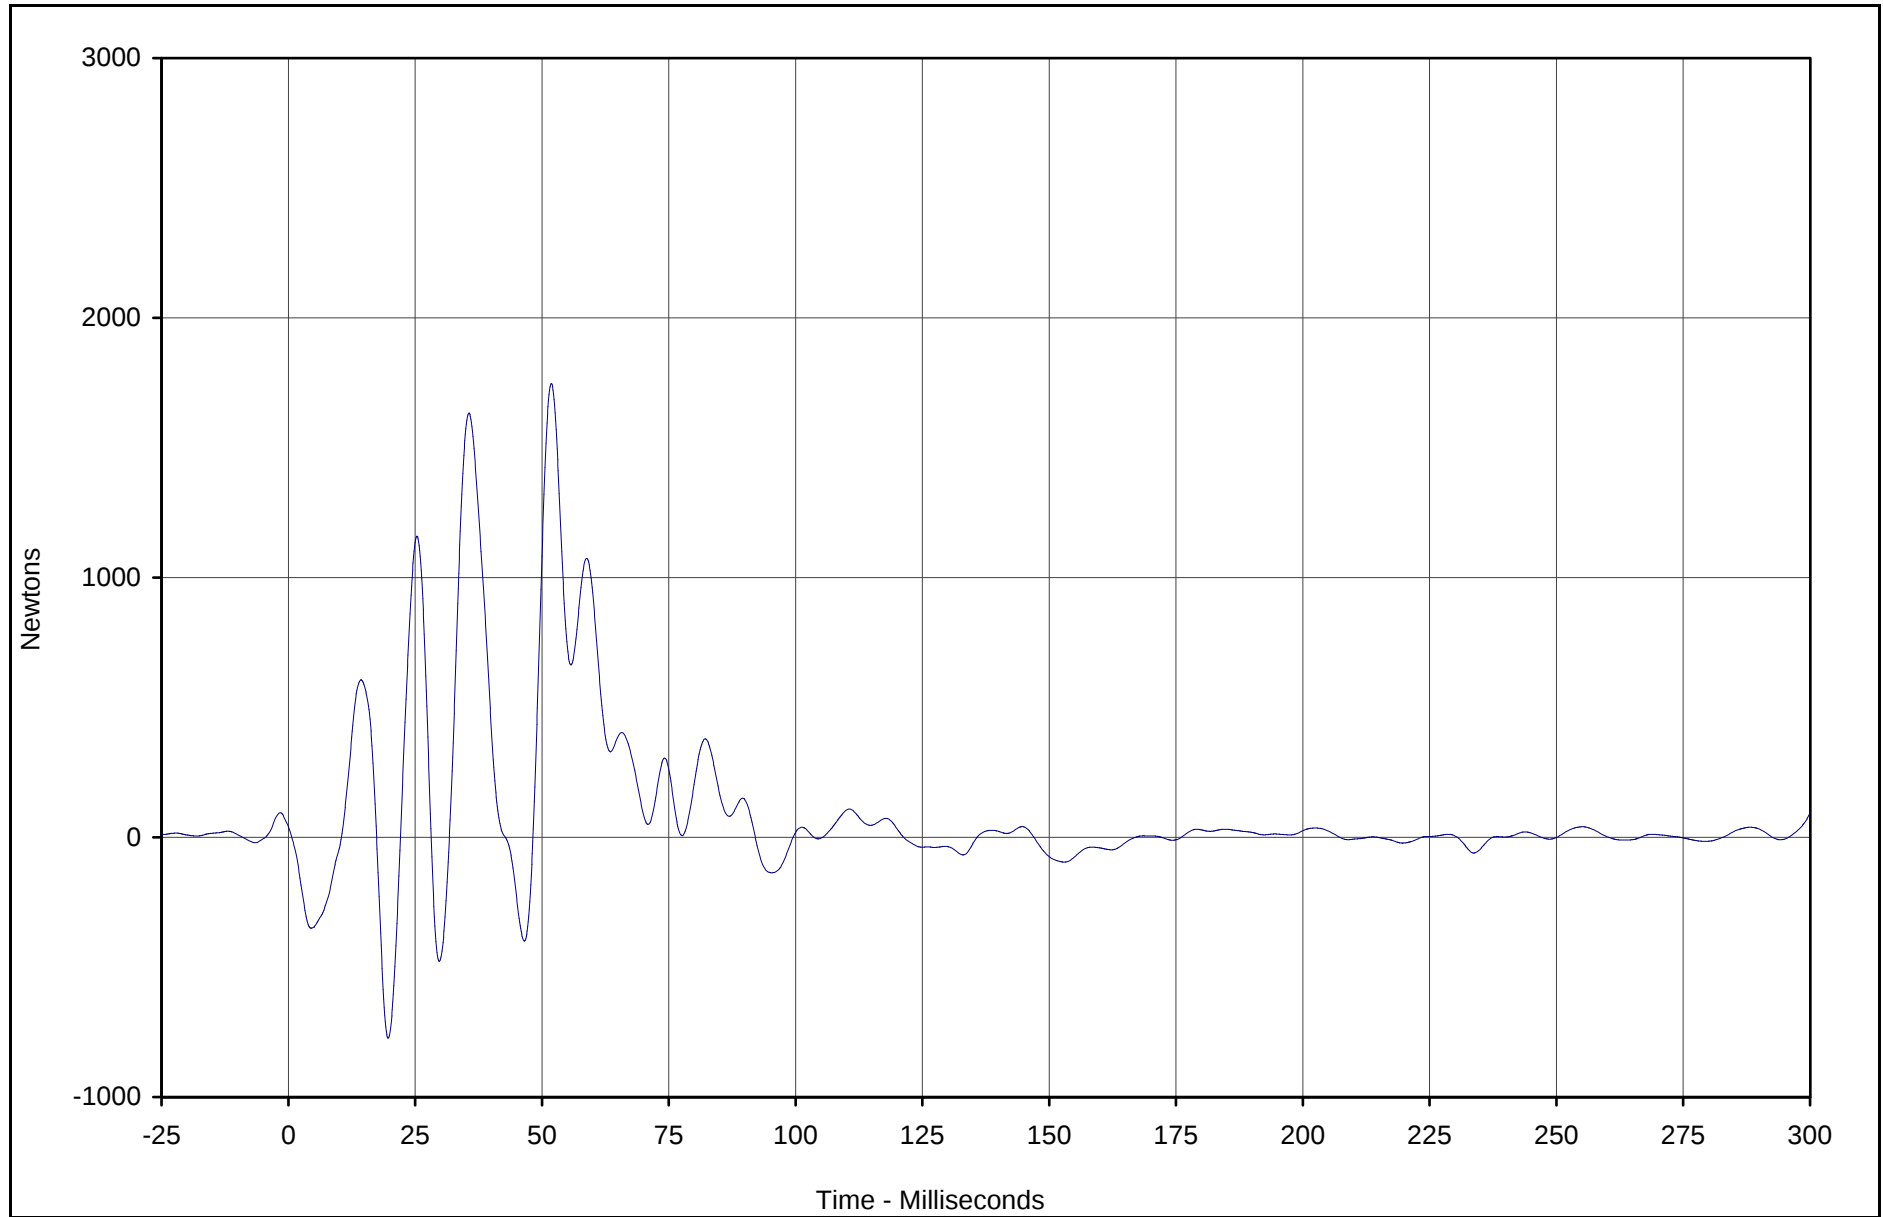

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force C1	116	FIL	Newtons	1746.6	51.9	-773.0	19.7	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

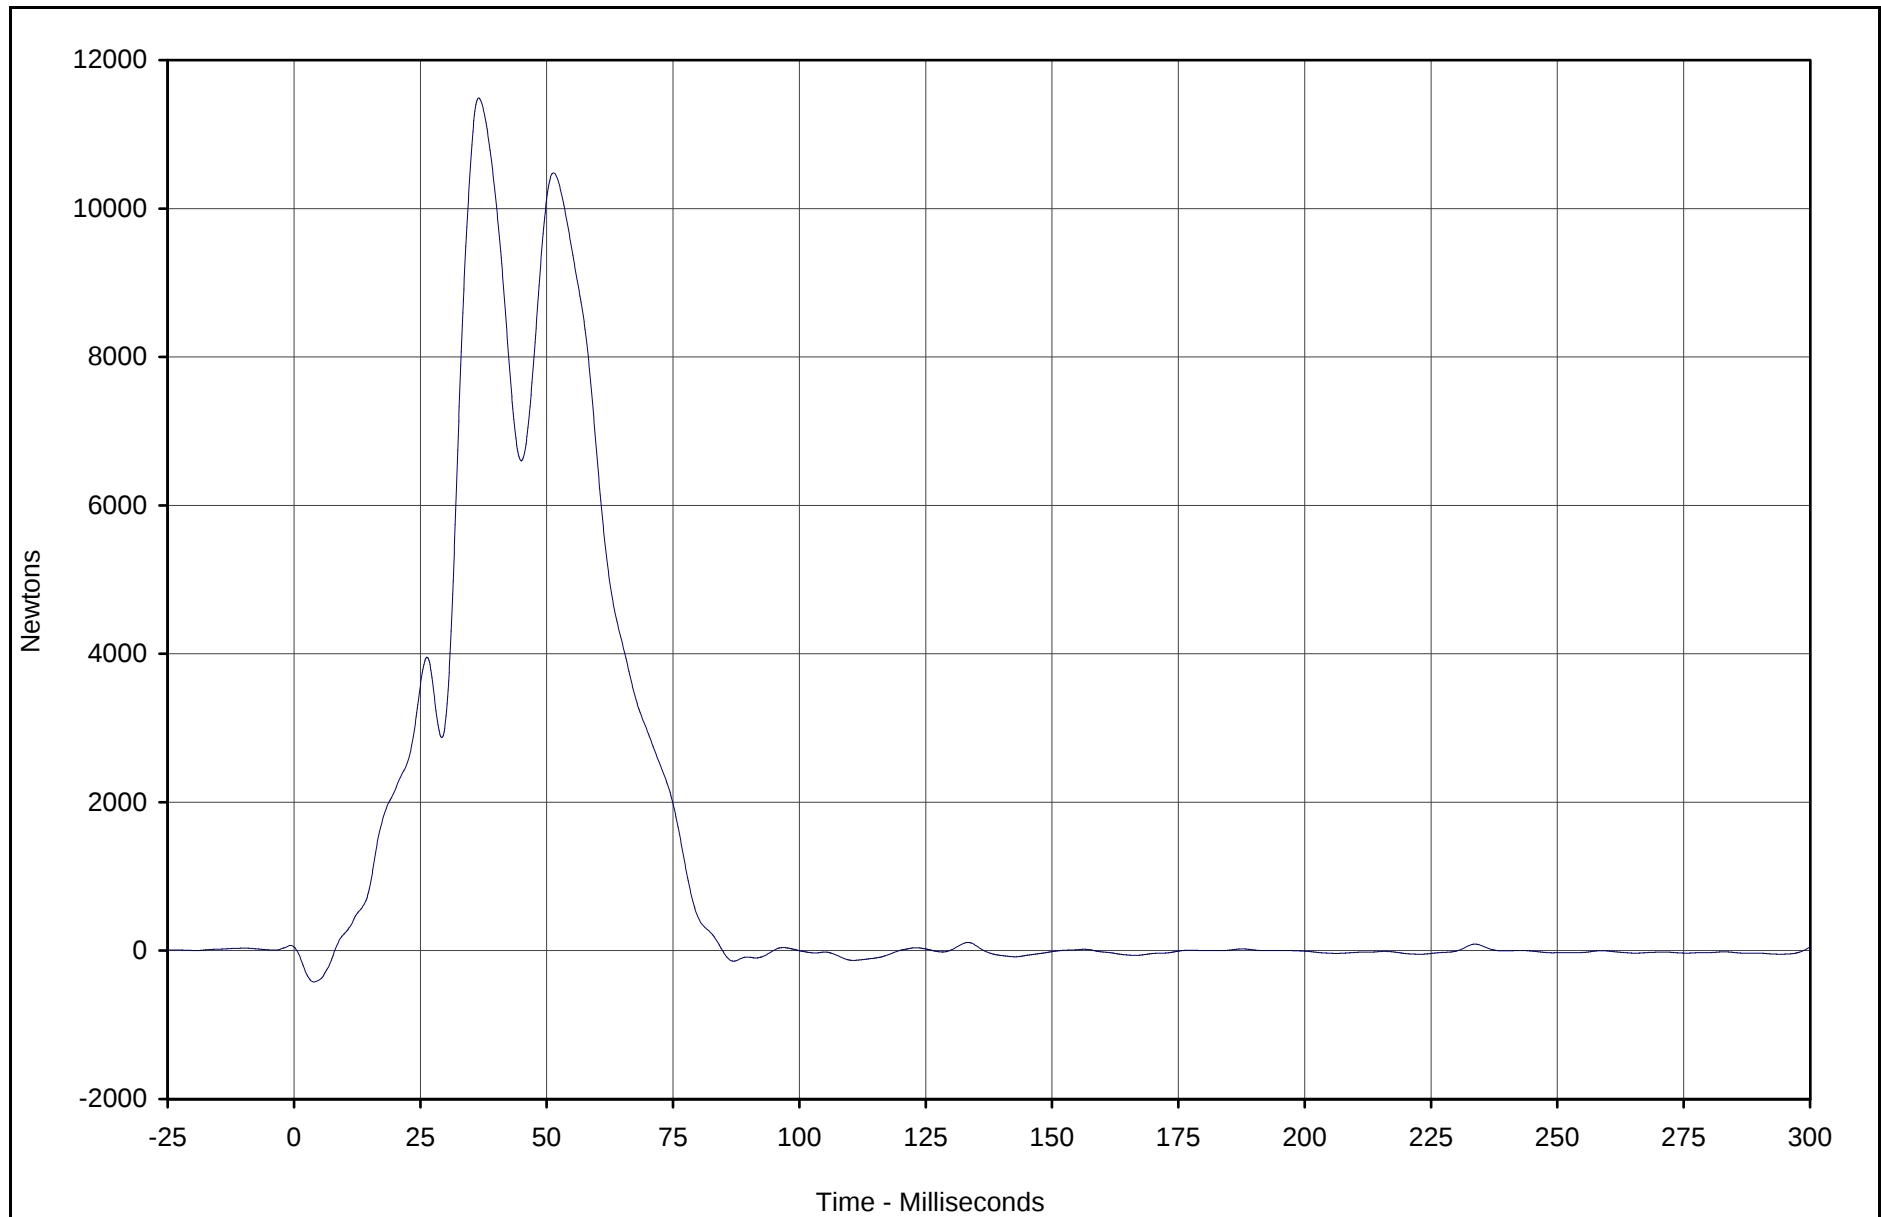

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force C2	117	FIL	Newtons	11491.0	36.5	-422.5	3.9	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

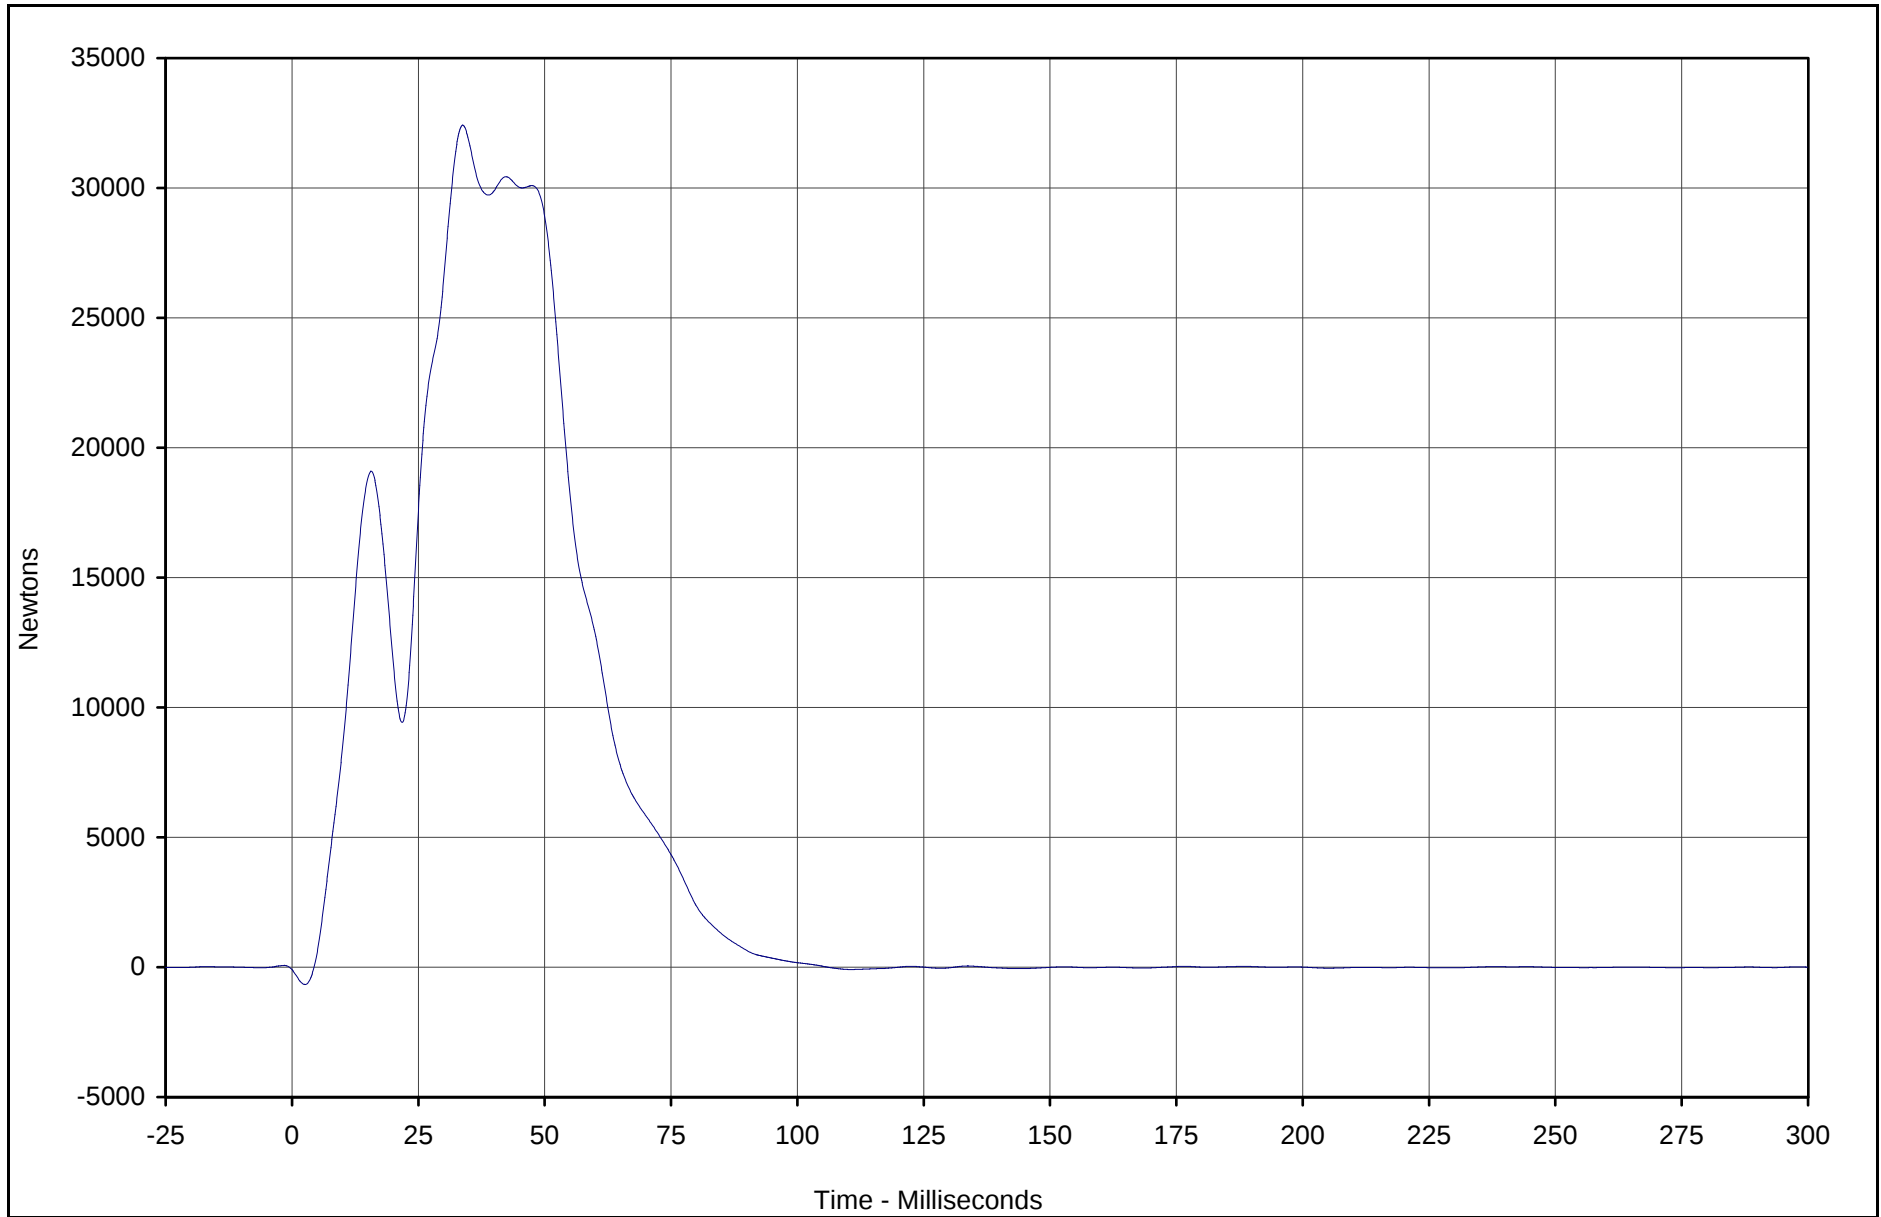

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force C3	118	FIL	Newtons	32418.6	33.8	-666.9	2.6	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

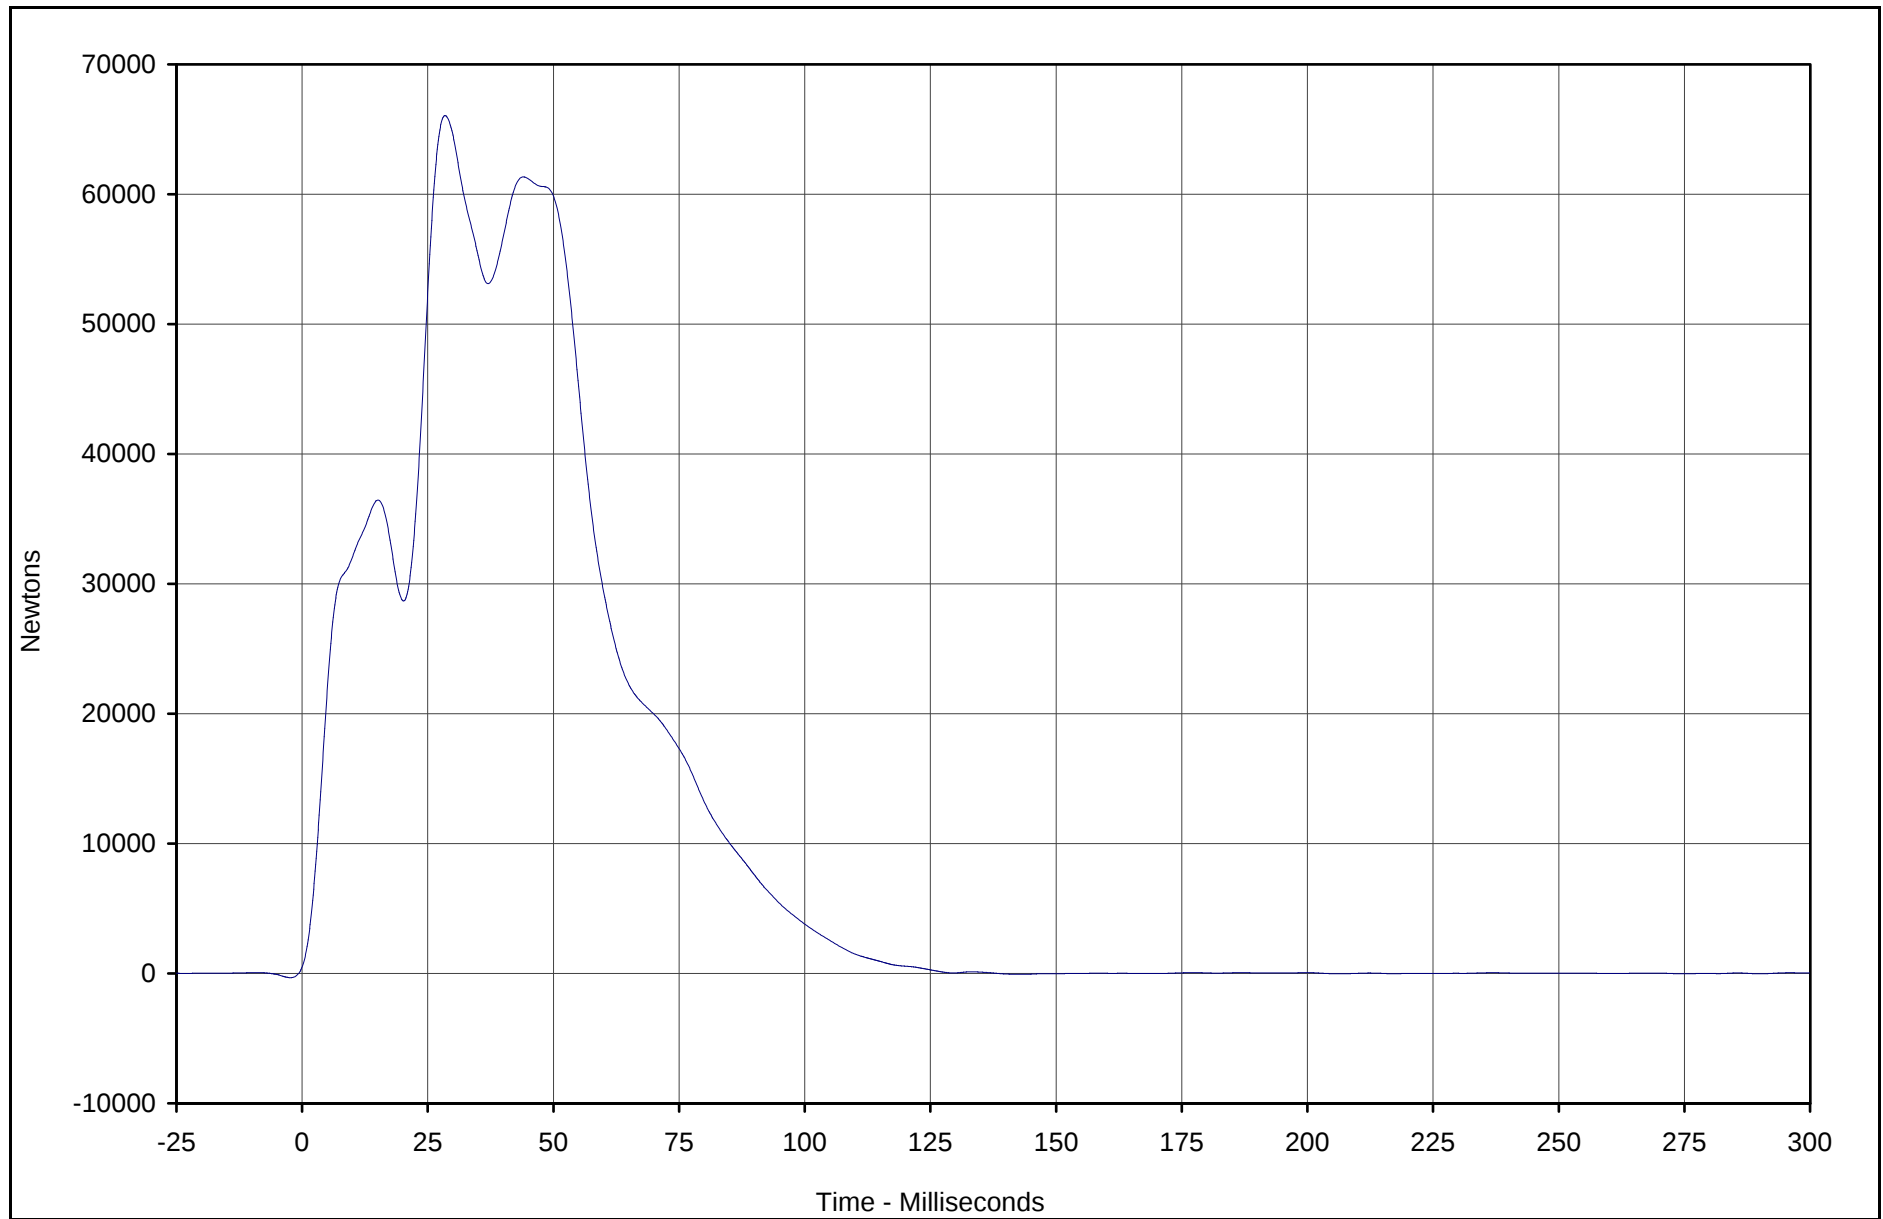

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force C4	119	FIL	Newtons	66063.5	28.4	-60.5	144.0	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

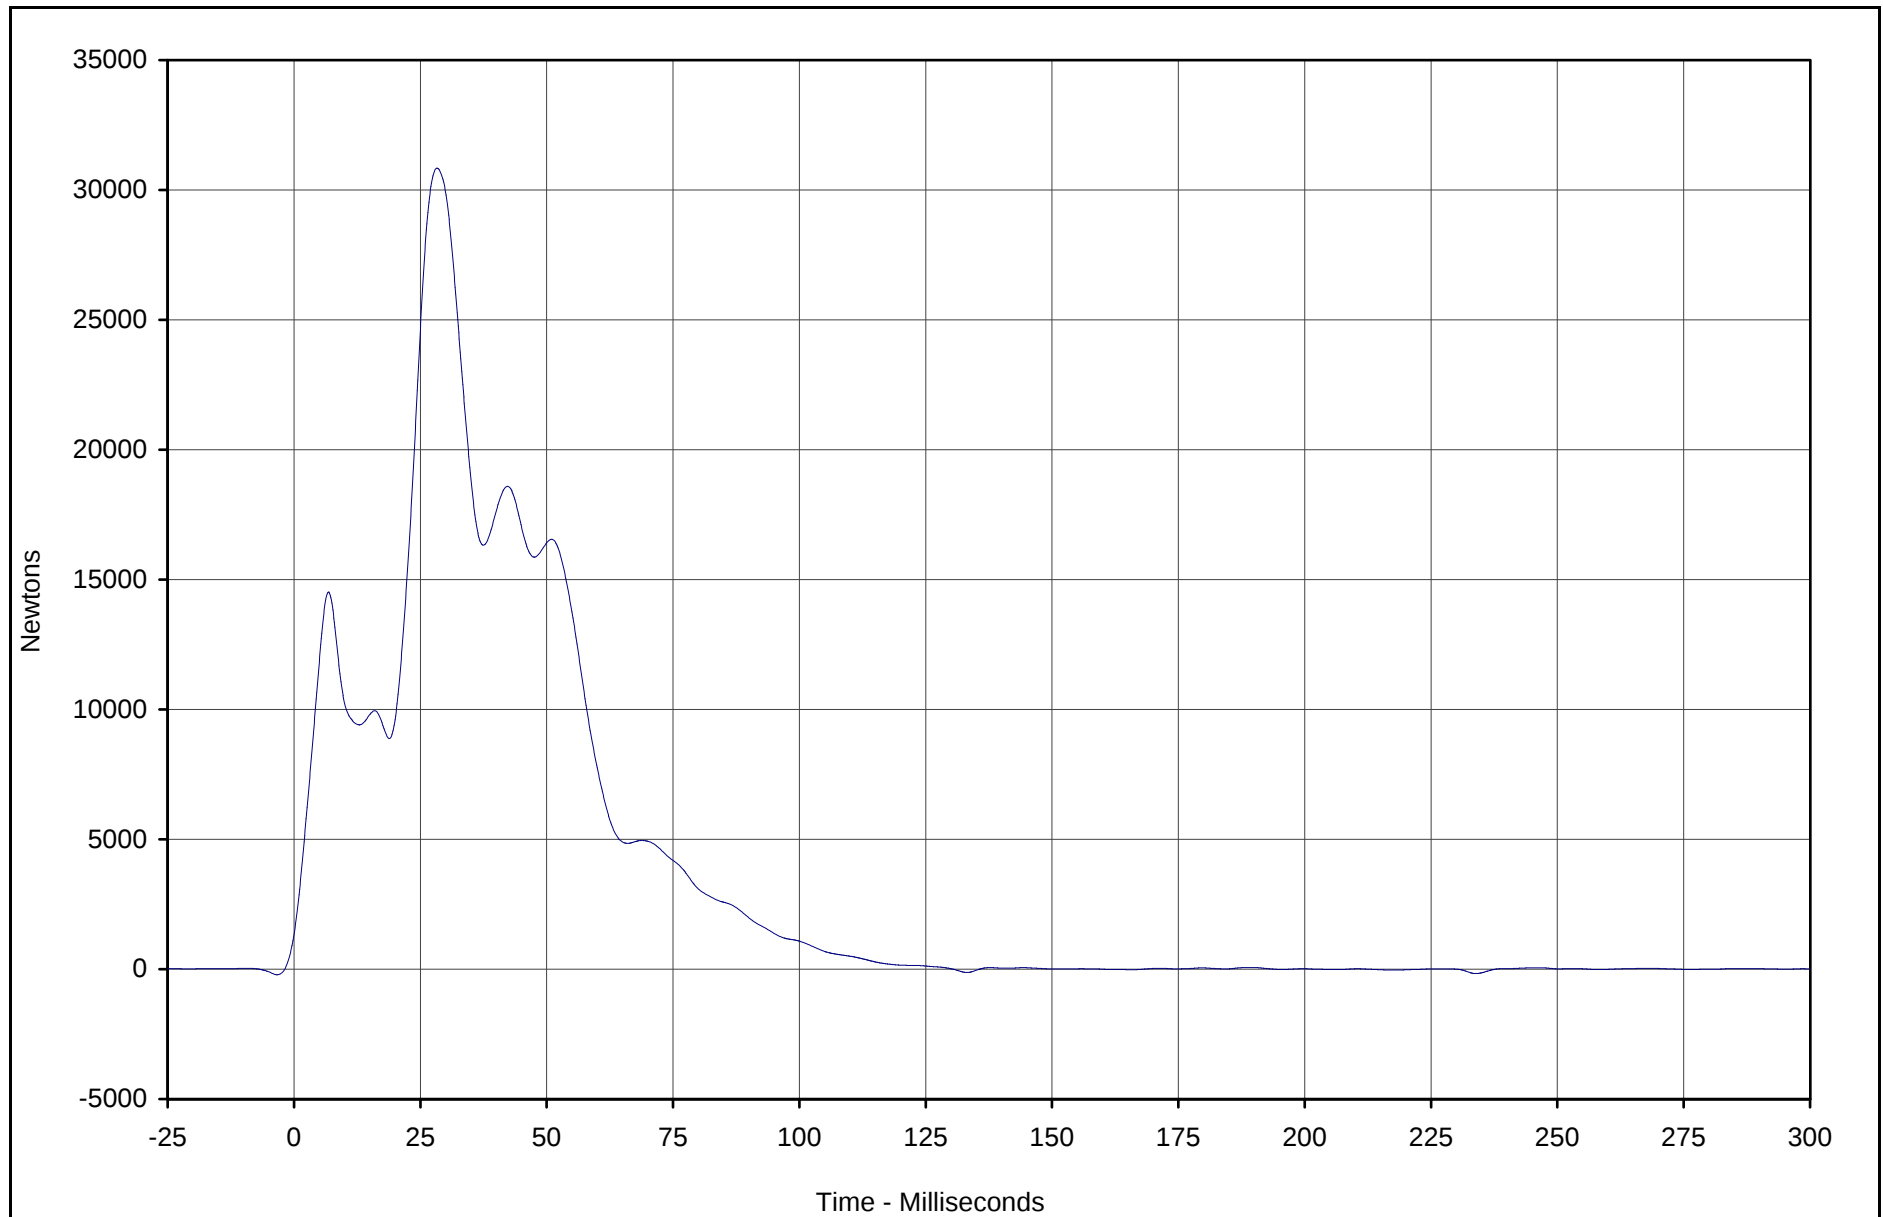

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force C5	120	FIL	Newtons	30840.1	28.3	-168.8	233.8	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

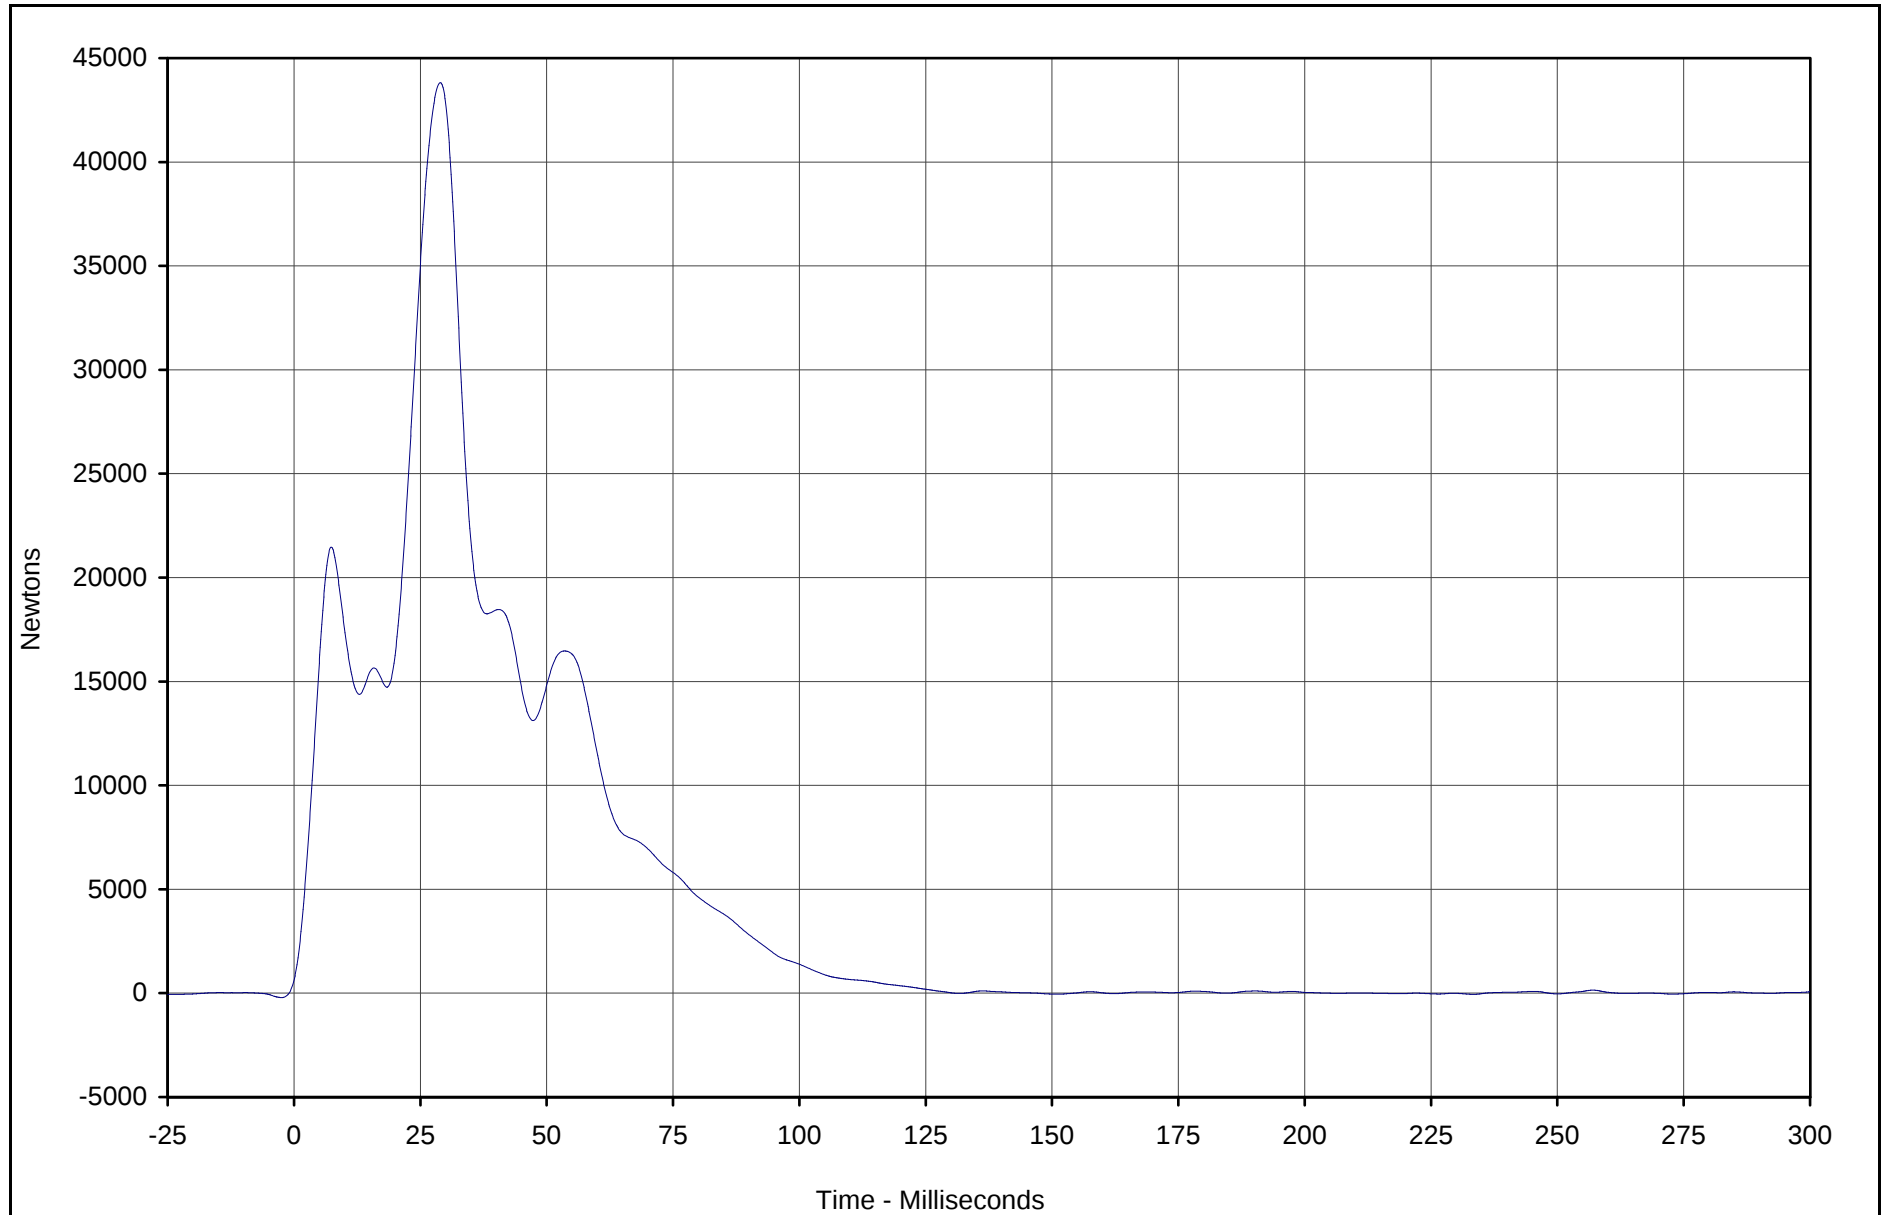

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force C6	121	FIL	Newtons	43824.1	28.9	-59.0	233.4	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

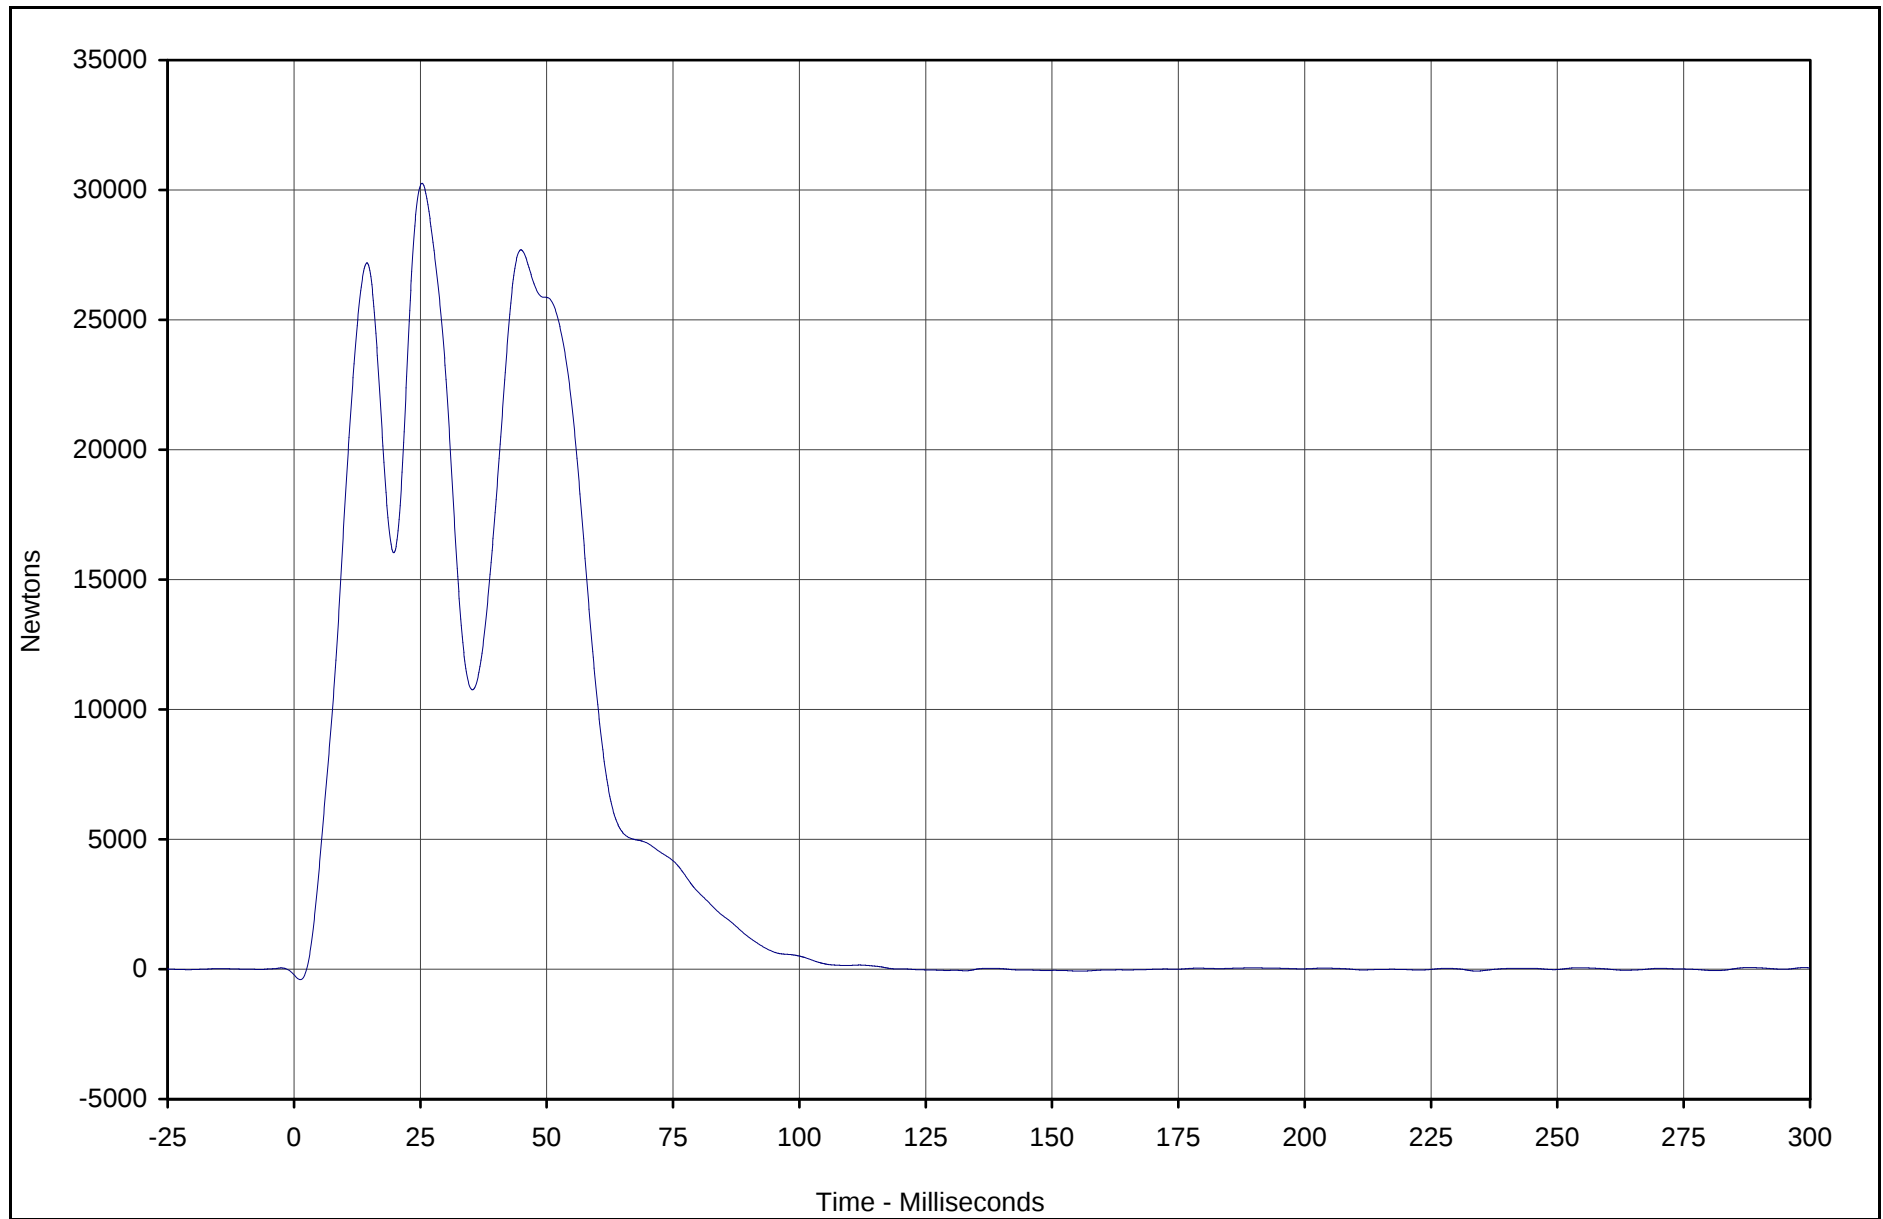

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force C7	122	FIL	Newtons	30256.5	25.3	-401.5	1.3	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

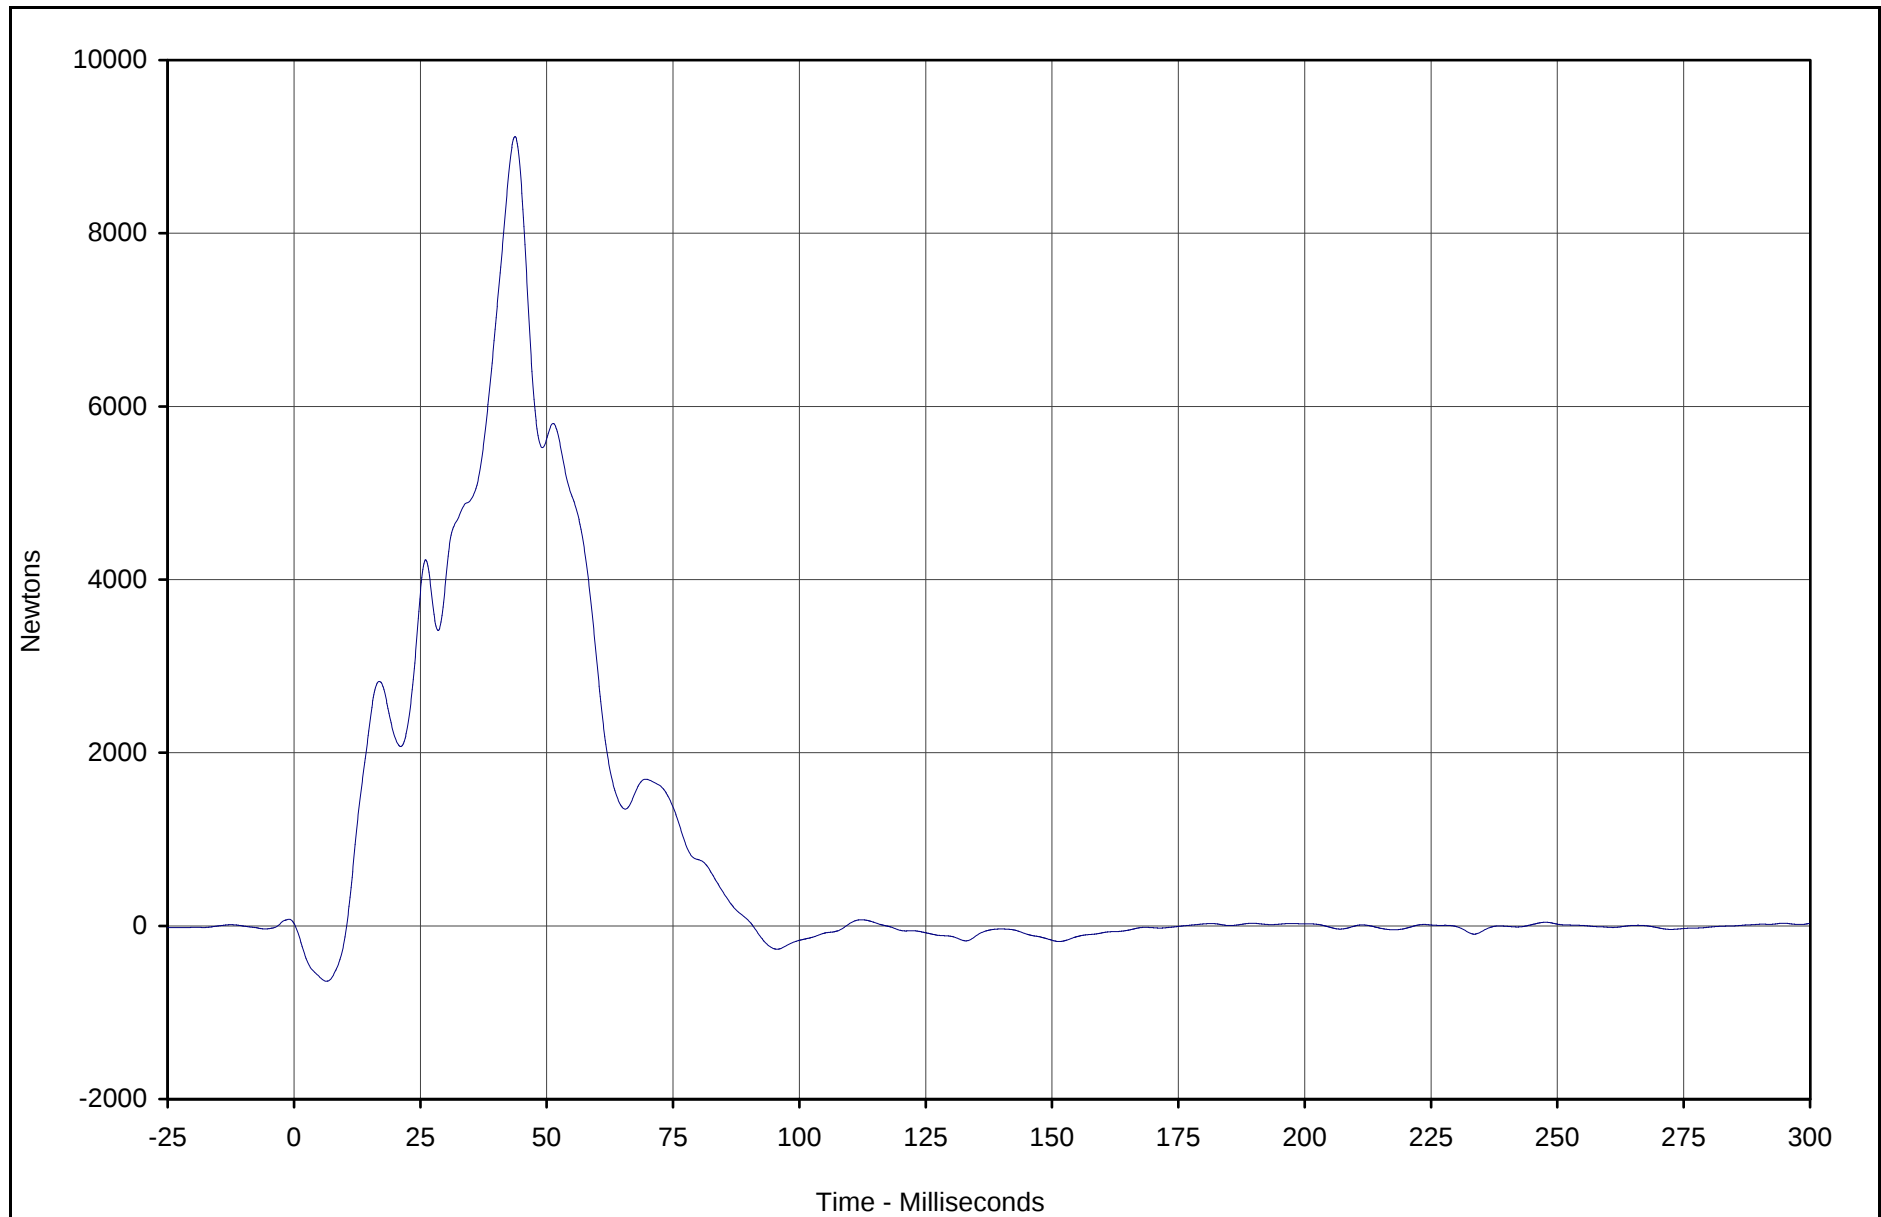

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force C8	123	FIL	Newtons	9116.8	43.7	-638.7	6.4	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

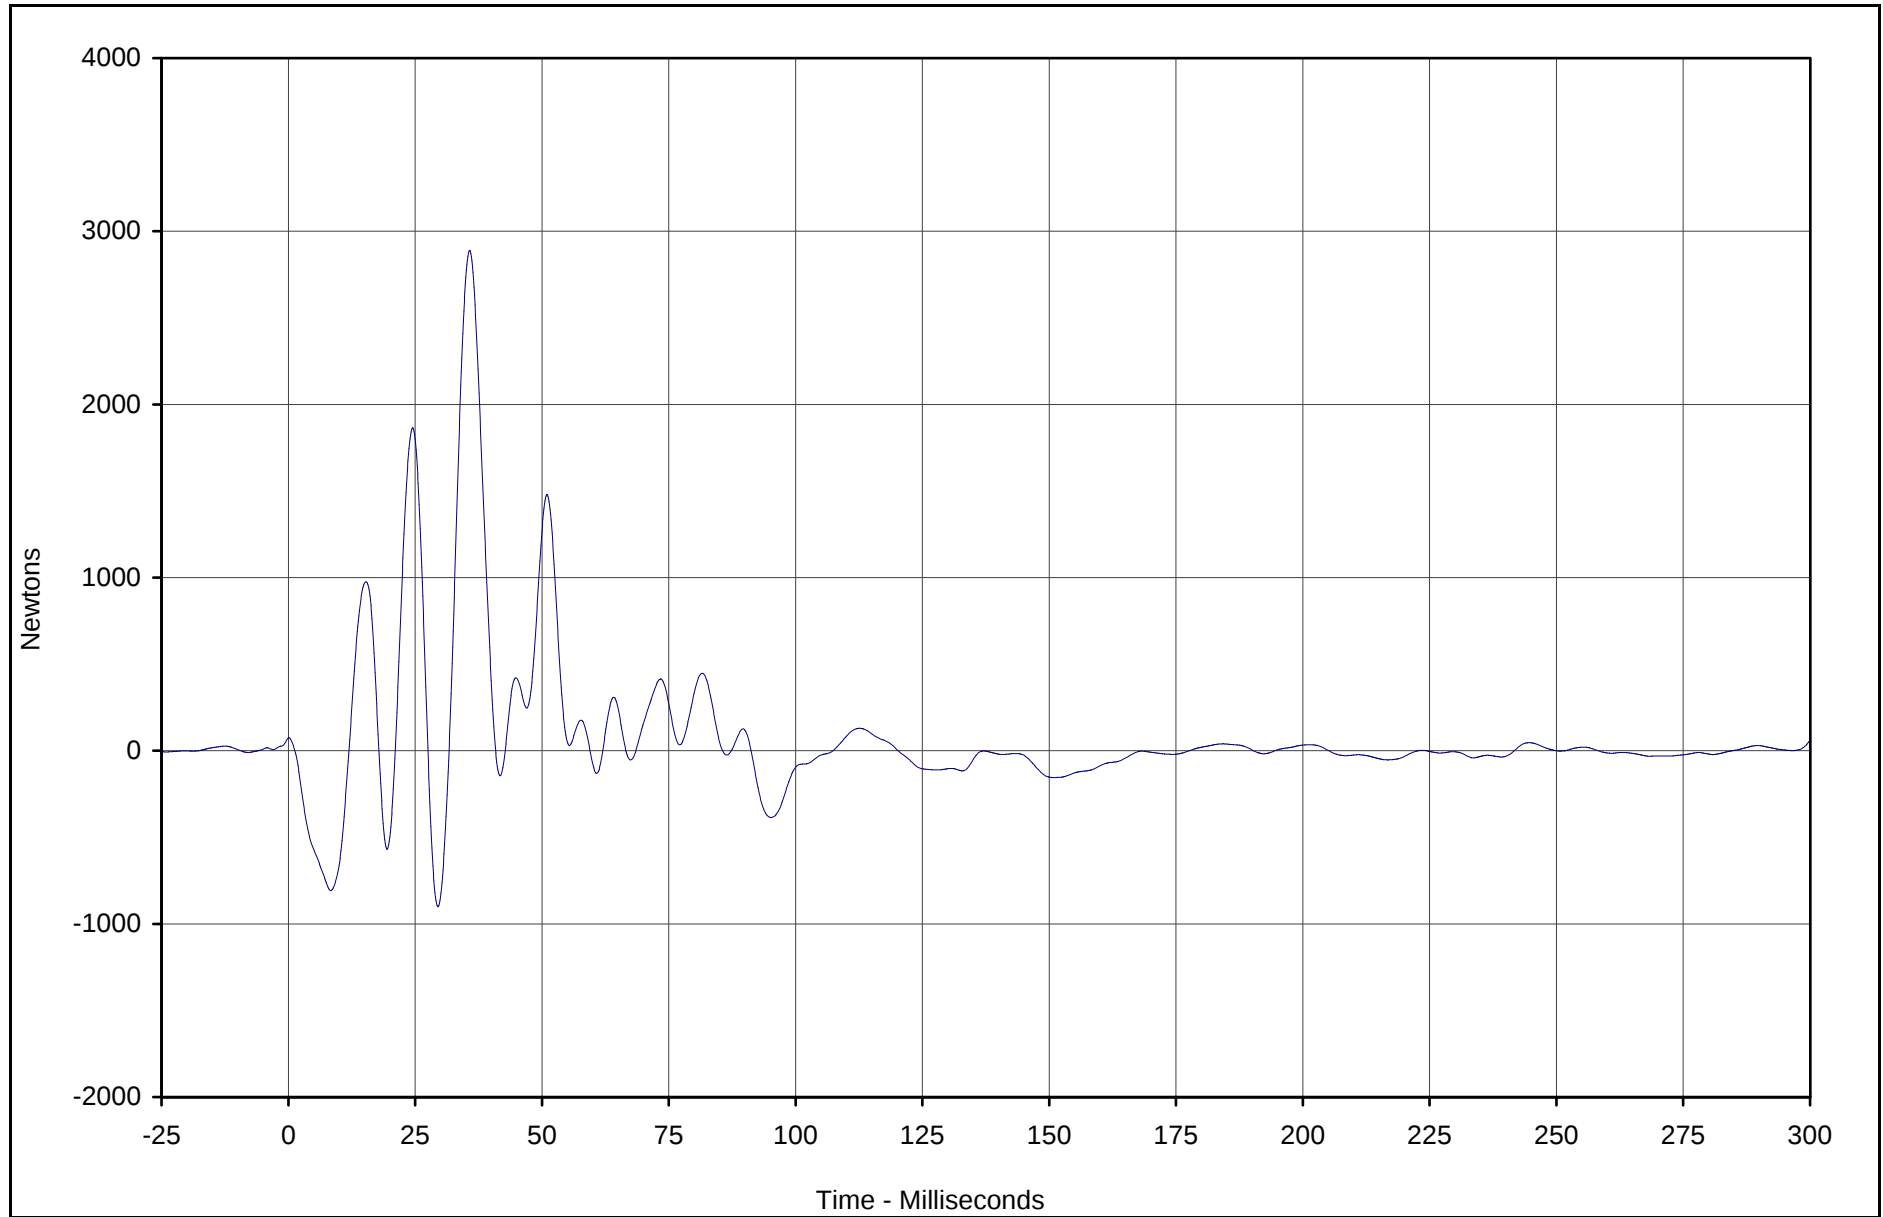

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force C9	124	FIL	Newtons	2890.2	35.7	-901.1	29.5	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

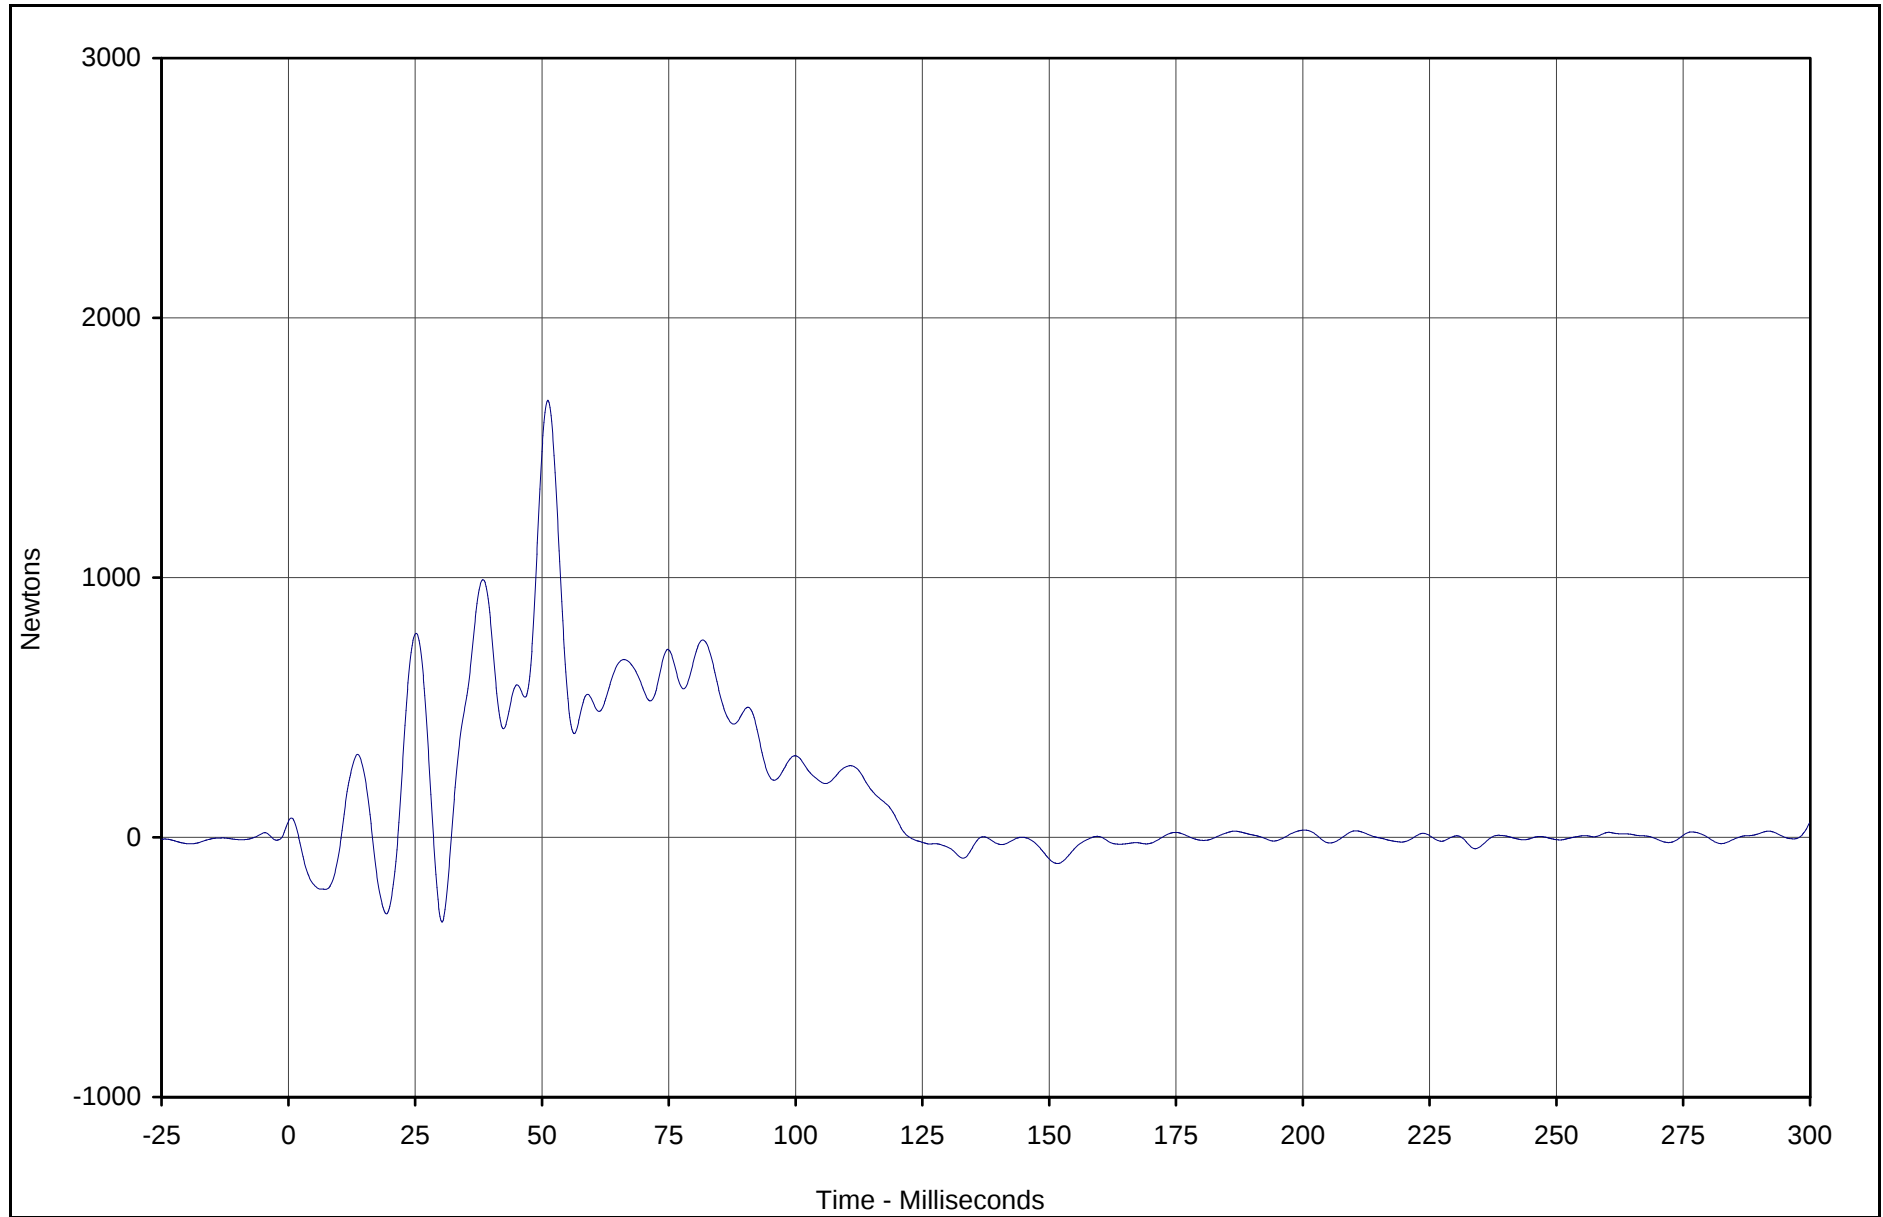

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force D1	125	FIL	Newtons	1682.4	51.2	-326.2	30.3	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

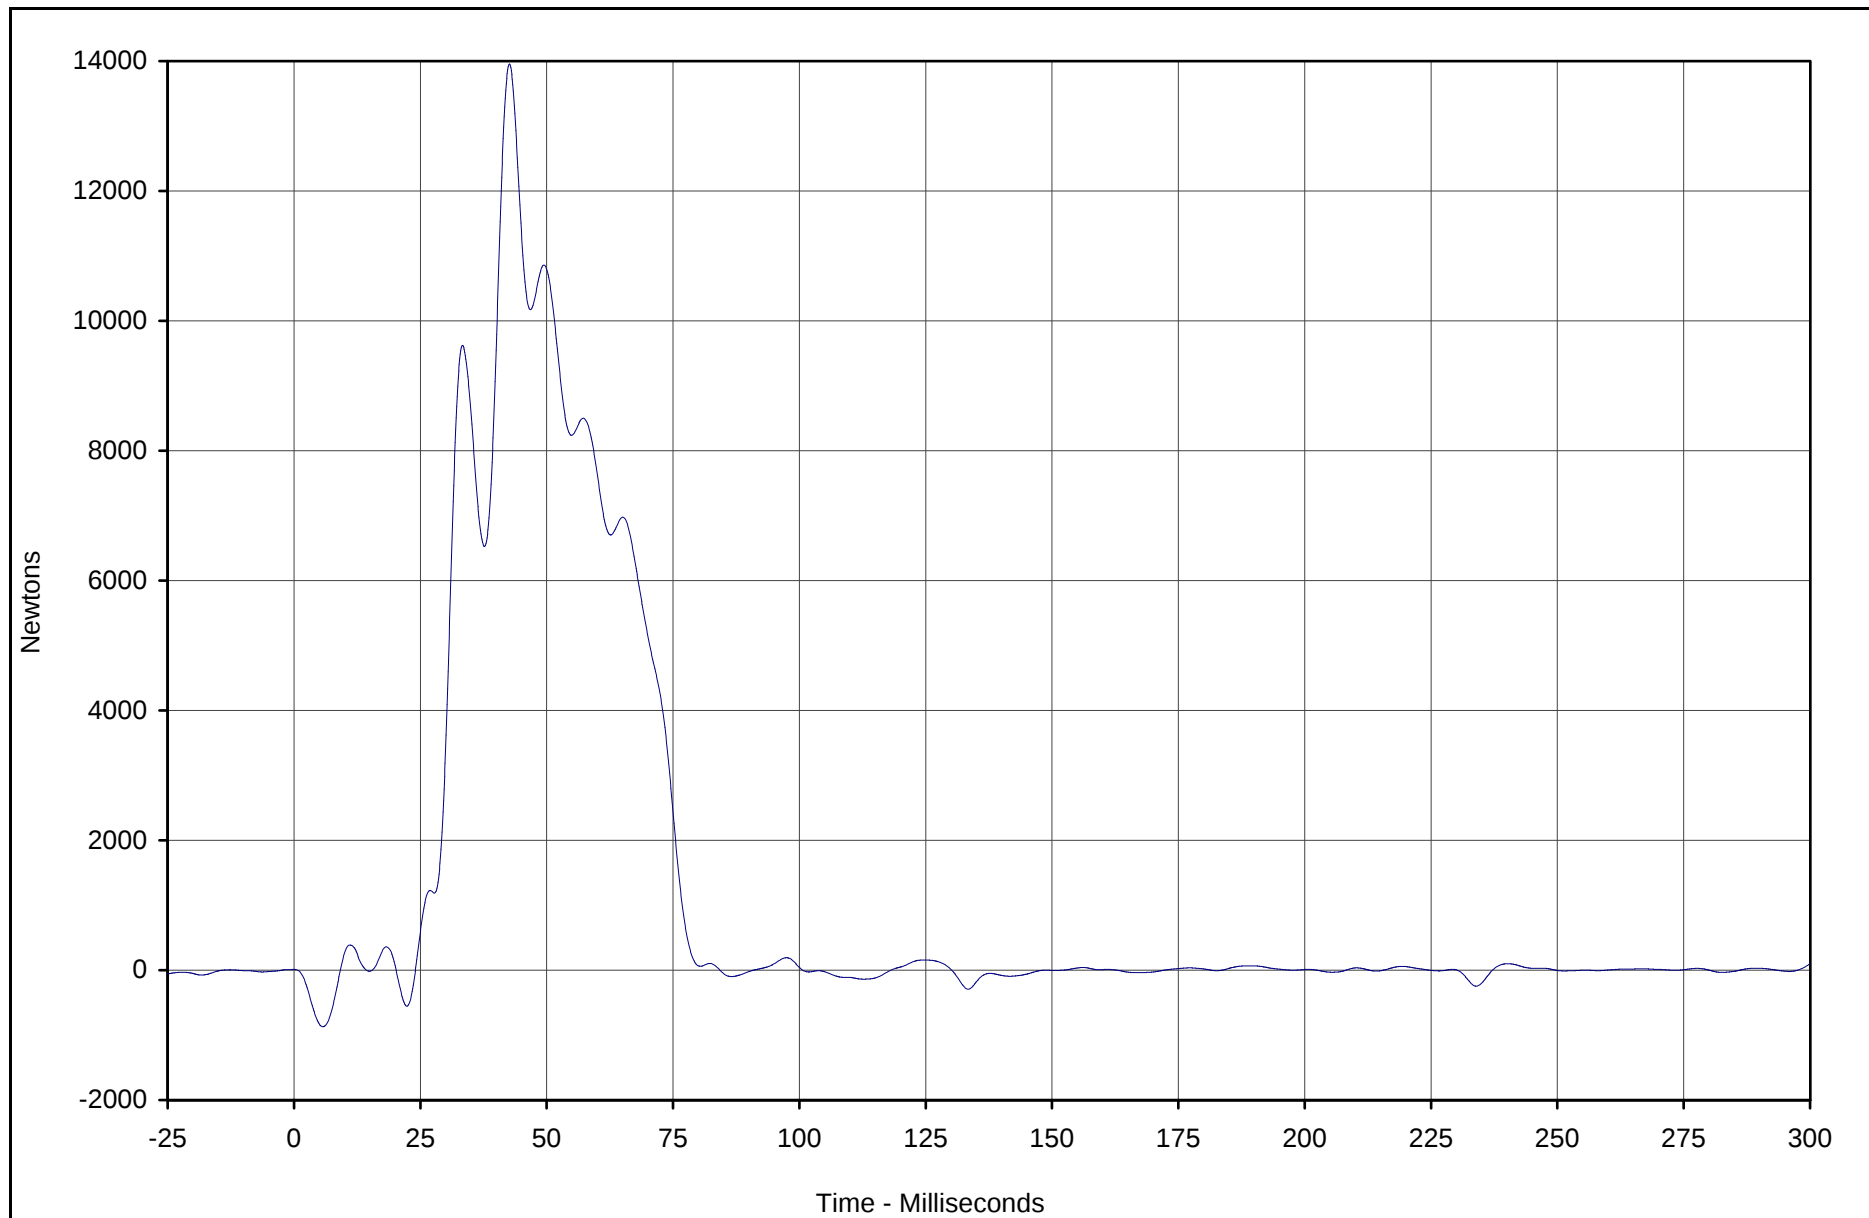

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force D2	126	FIL	Newtons	13953.3	42.6	-870.5	5.7	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

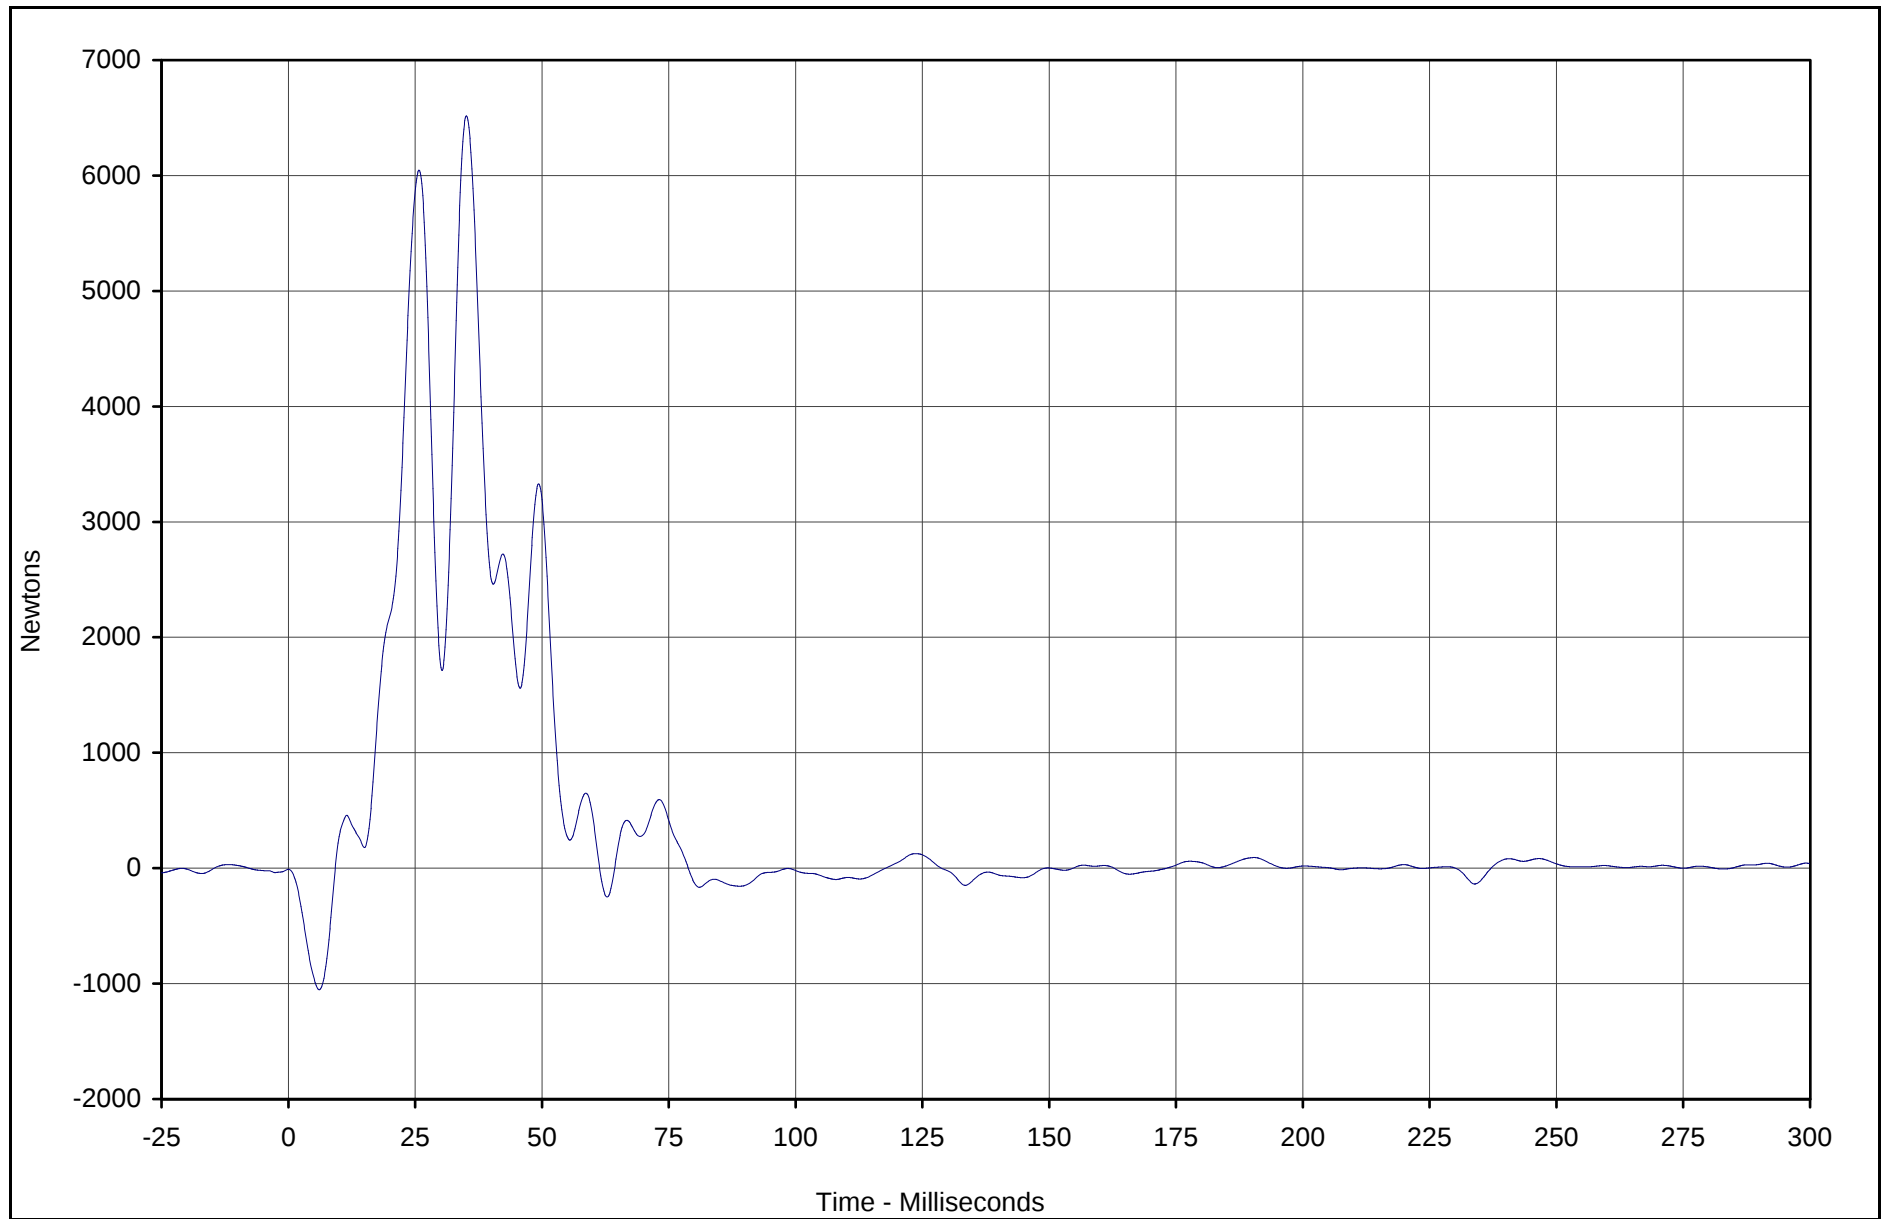

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force D3	127	FIL	Newtons	6516.5	35.1	-1053.8	6.1	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

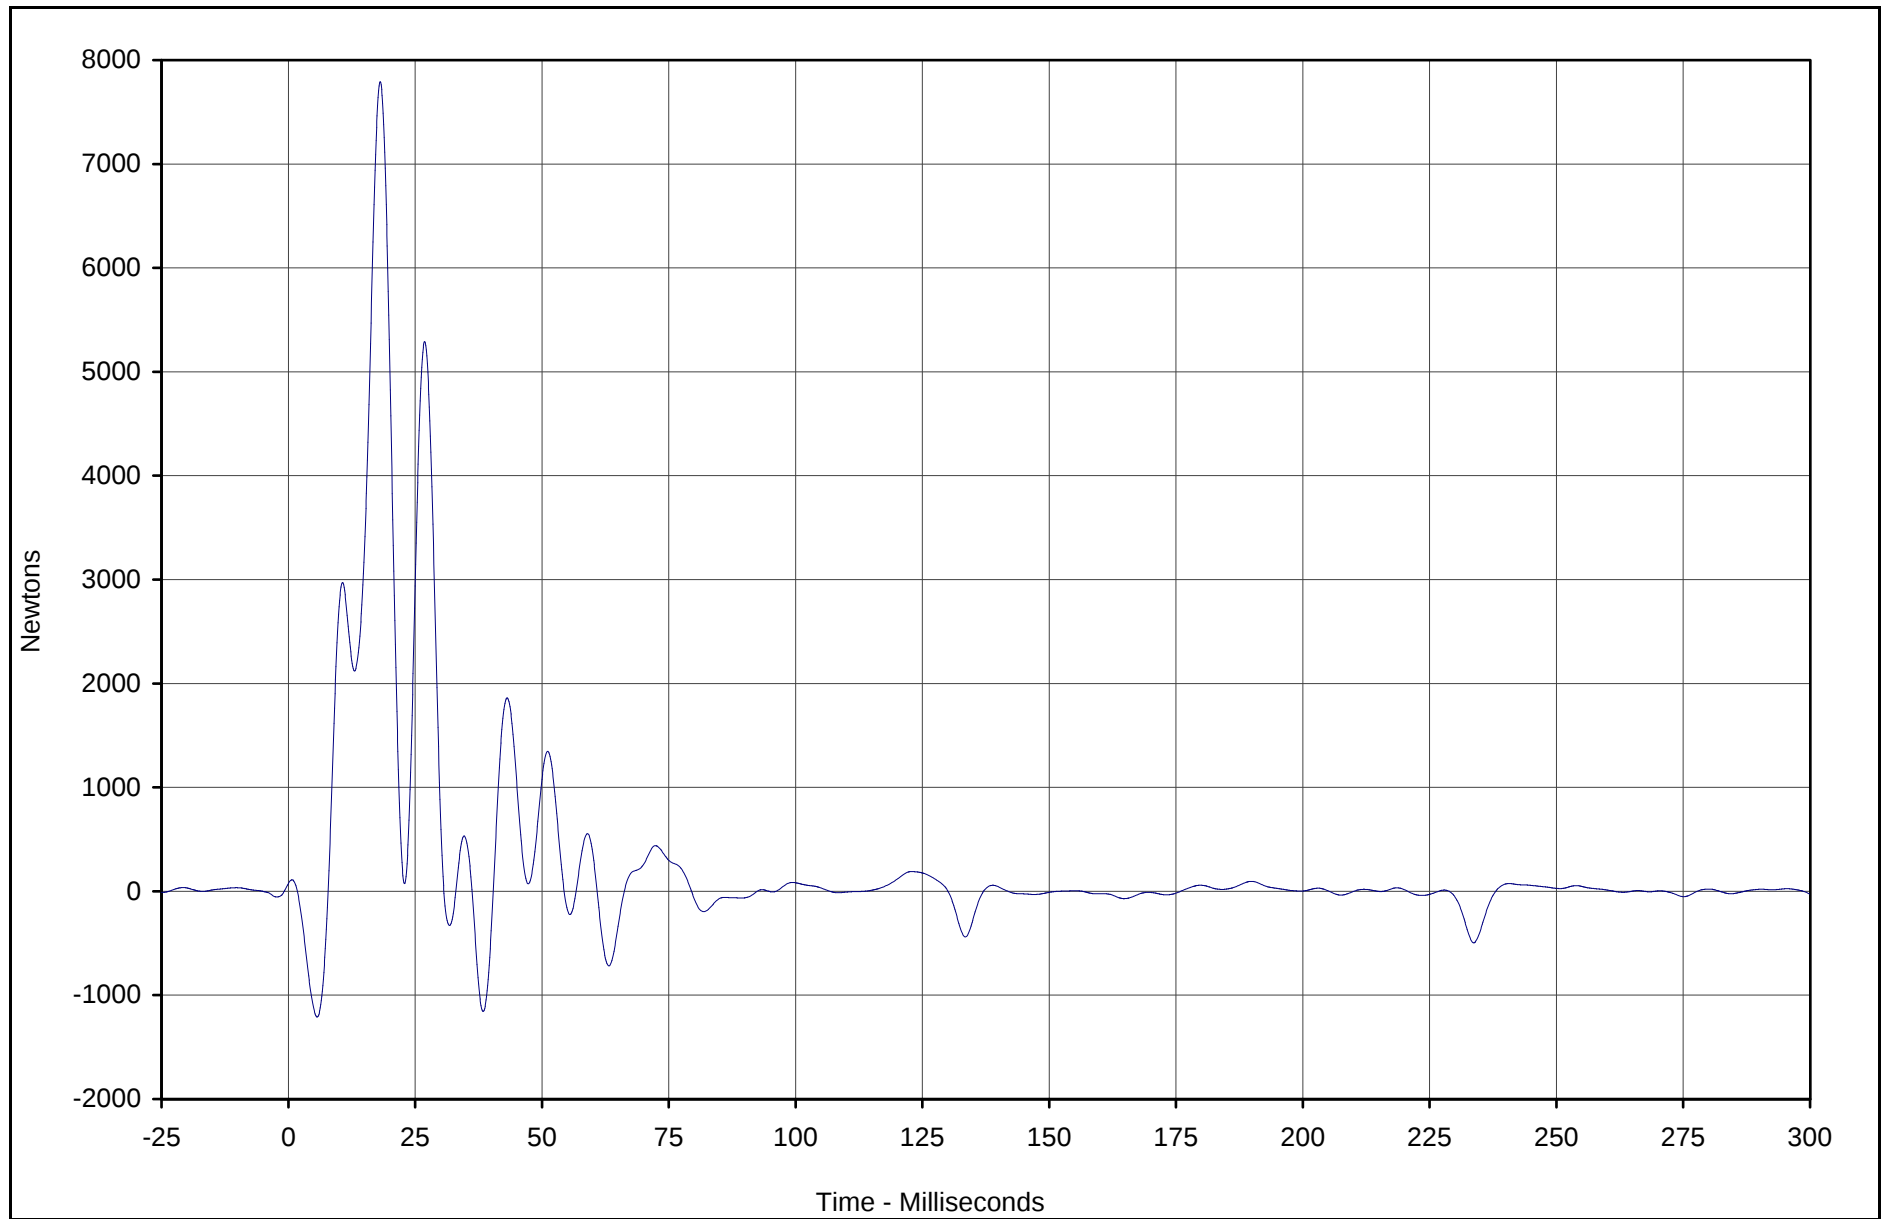

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force D4	128	FIL	Newtons	7792.0	18.1	-1209.8	5.7	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

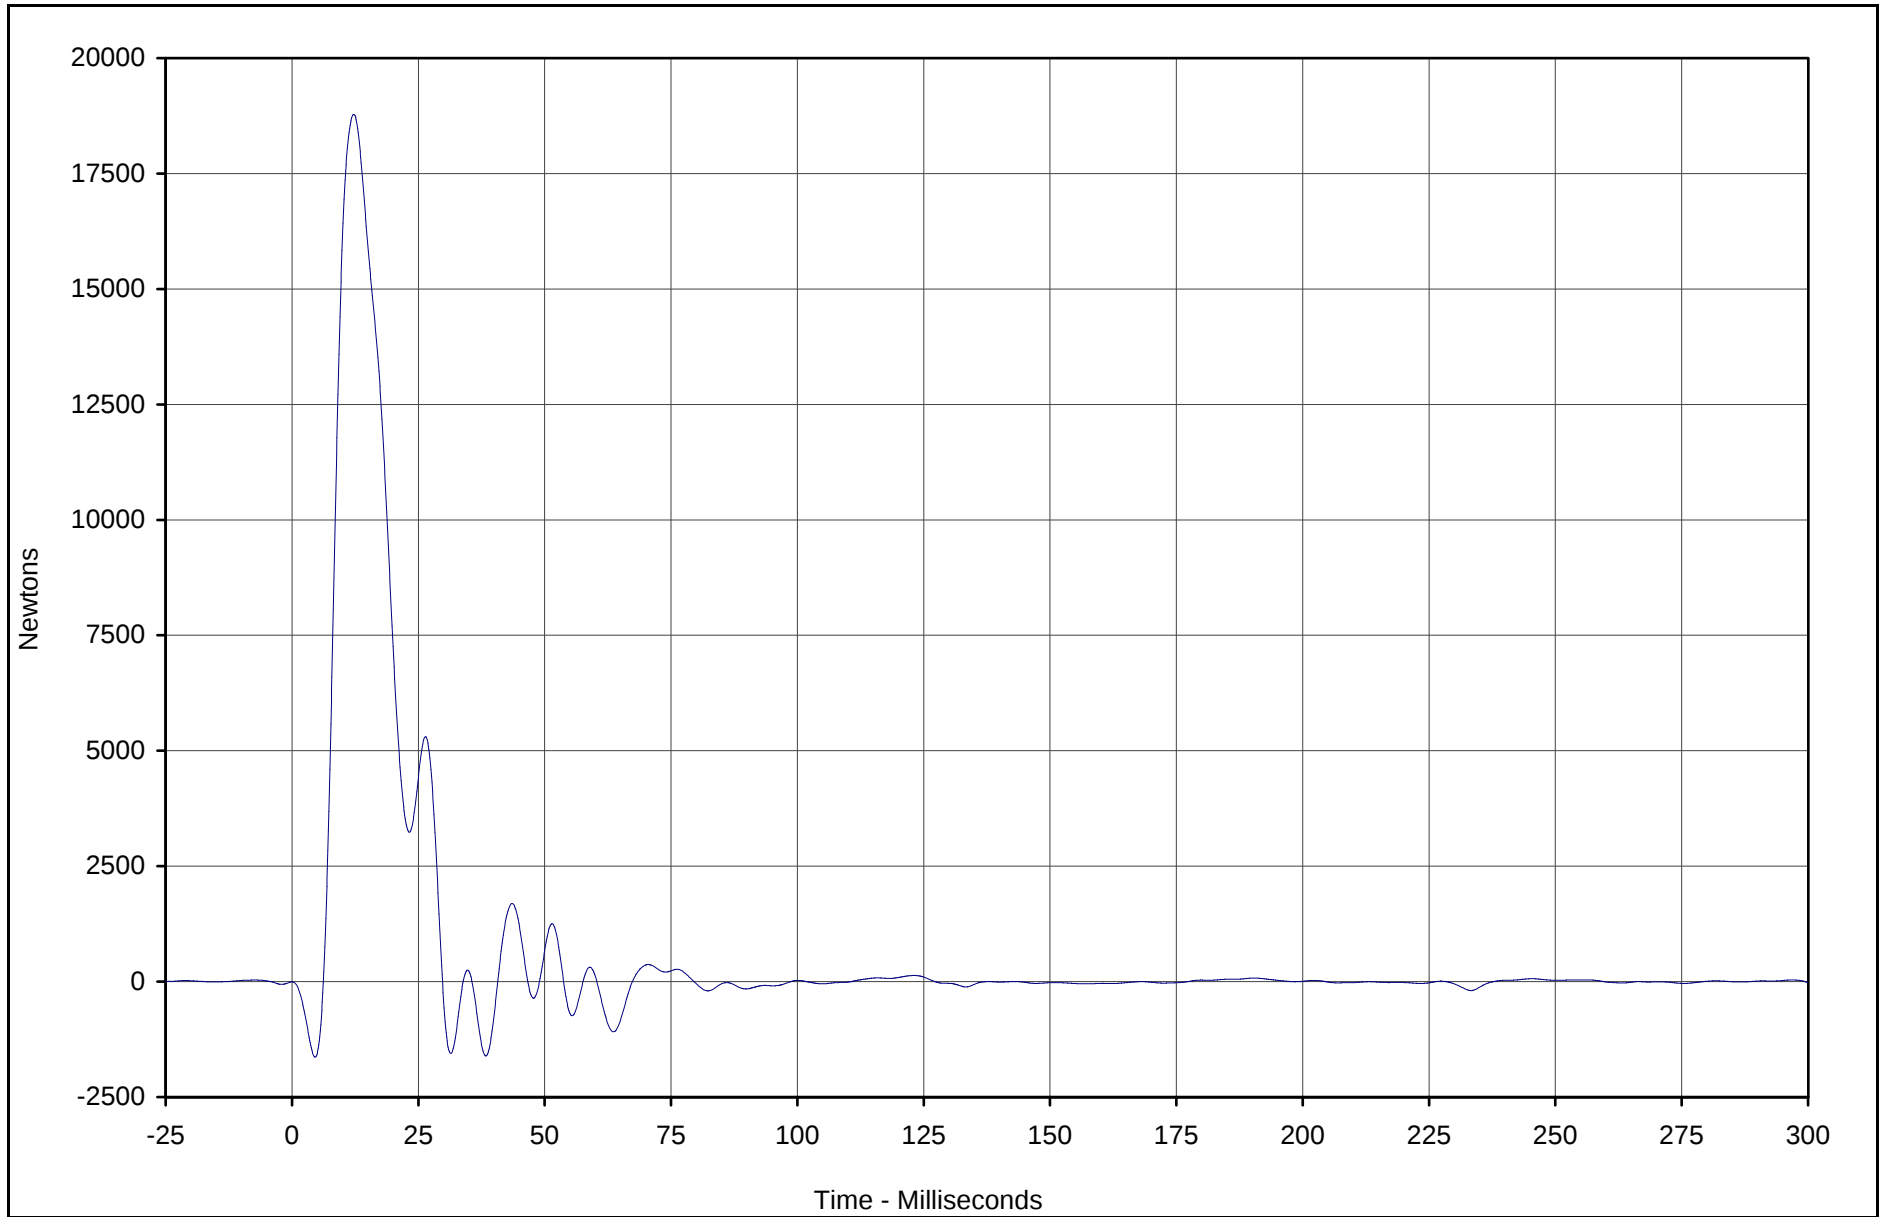

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force D5	129	FIL	Newtons	18780.1	12.2	-1635.8	4.6	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

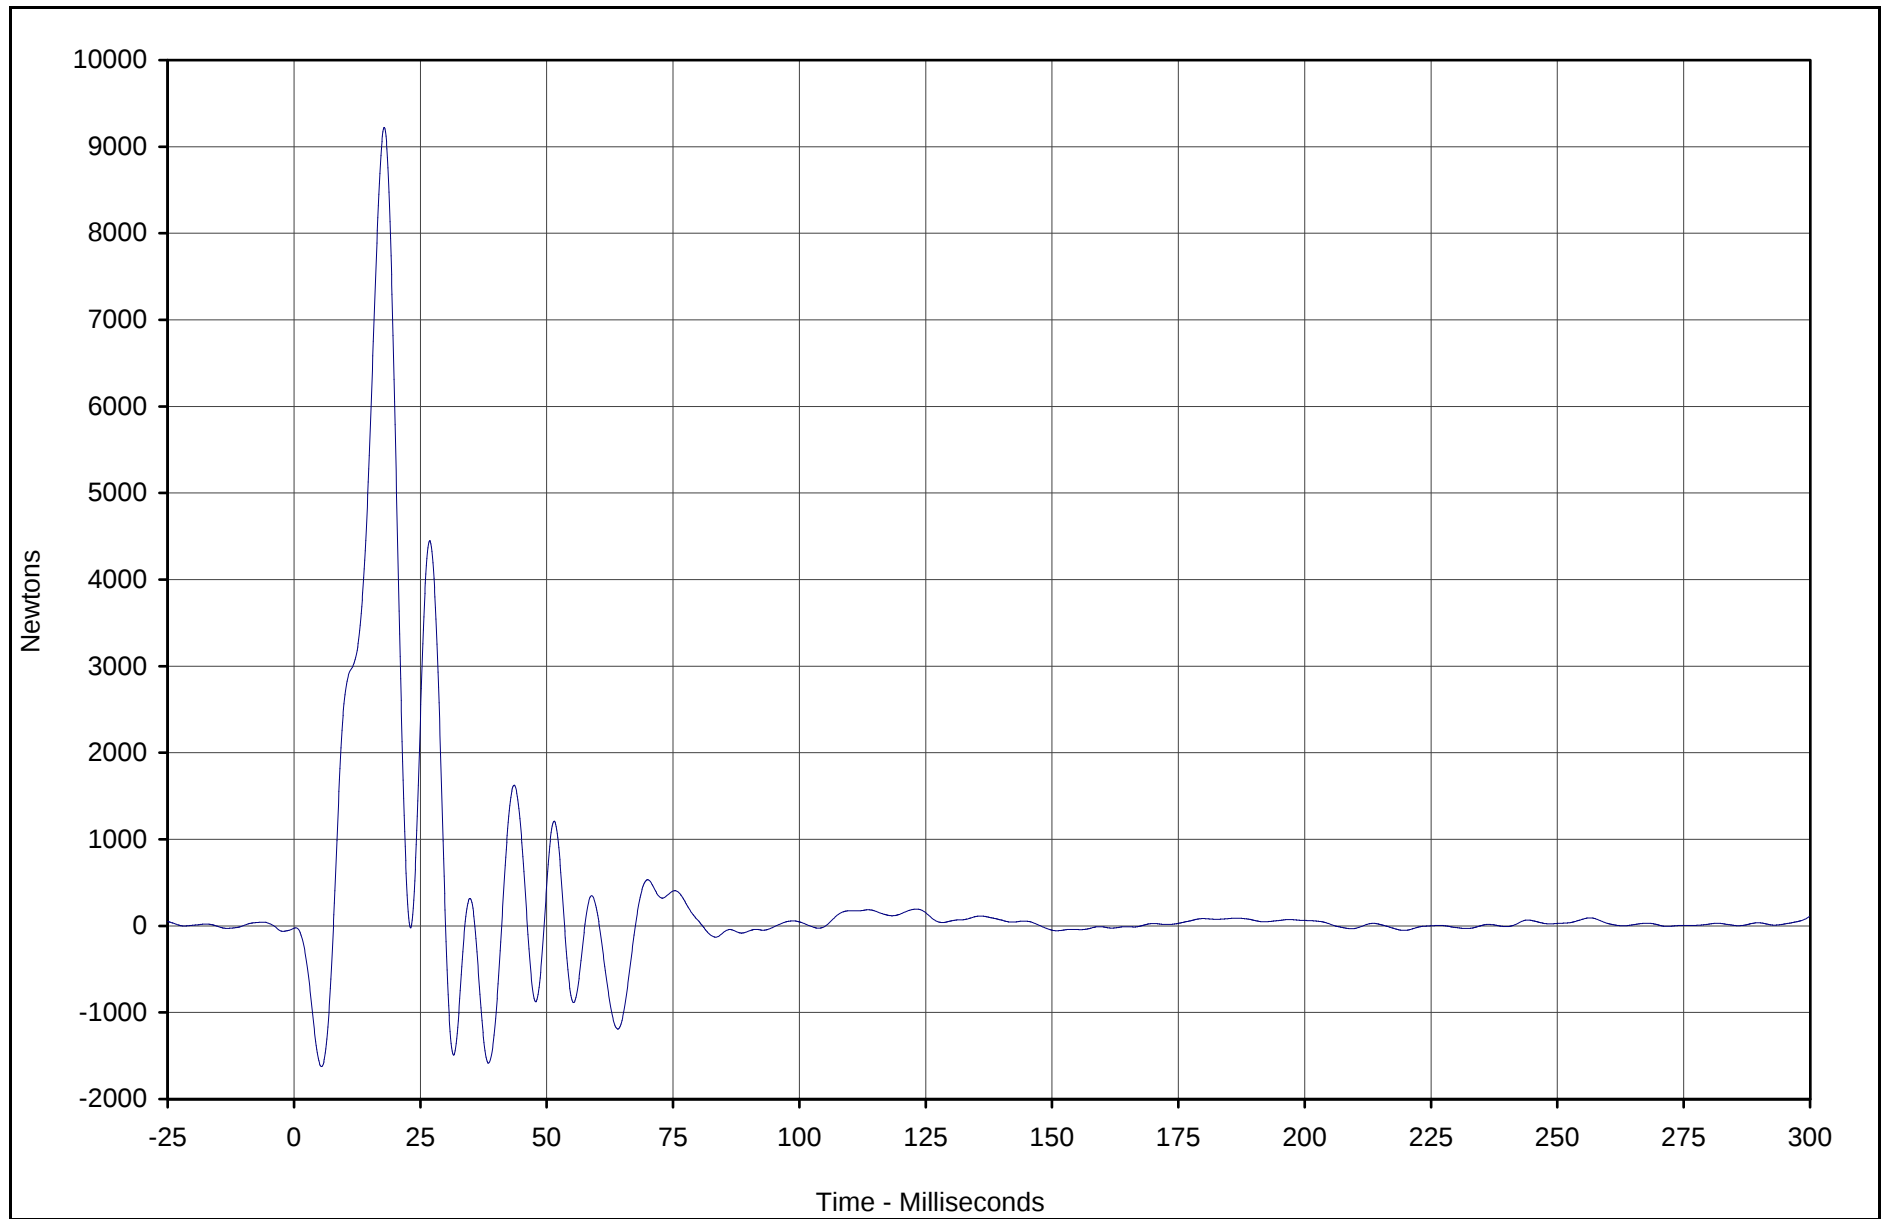

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force D6	130	FIL	Newtons	9221.4	17.9	-1624.8	5.4	60



Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV


Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

C-34

TR-P23001-11-NC

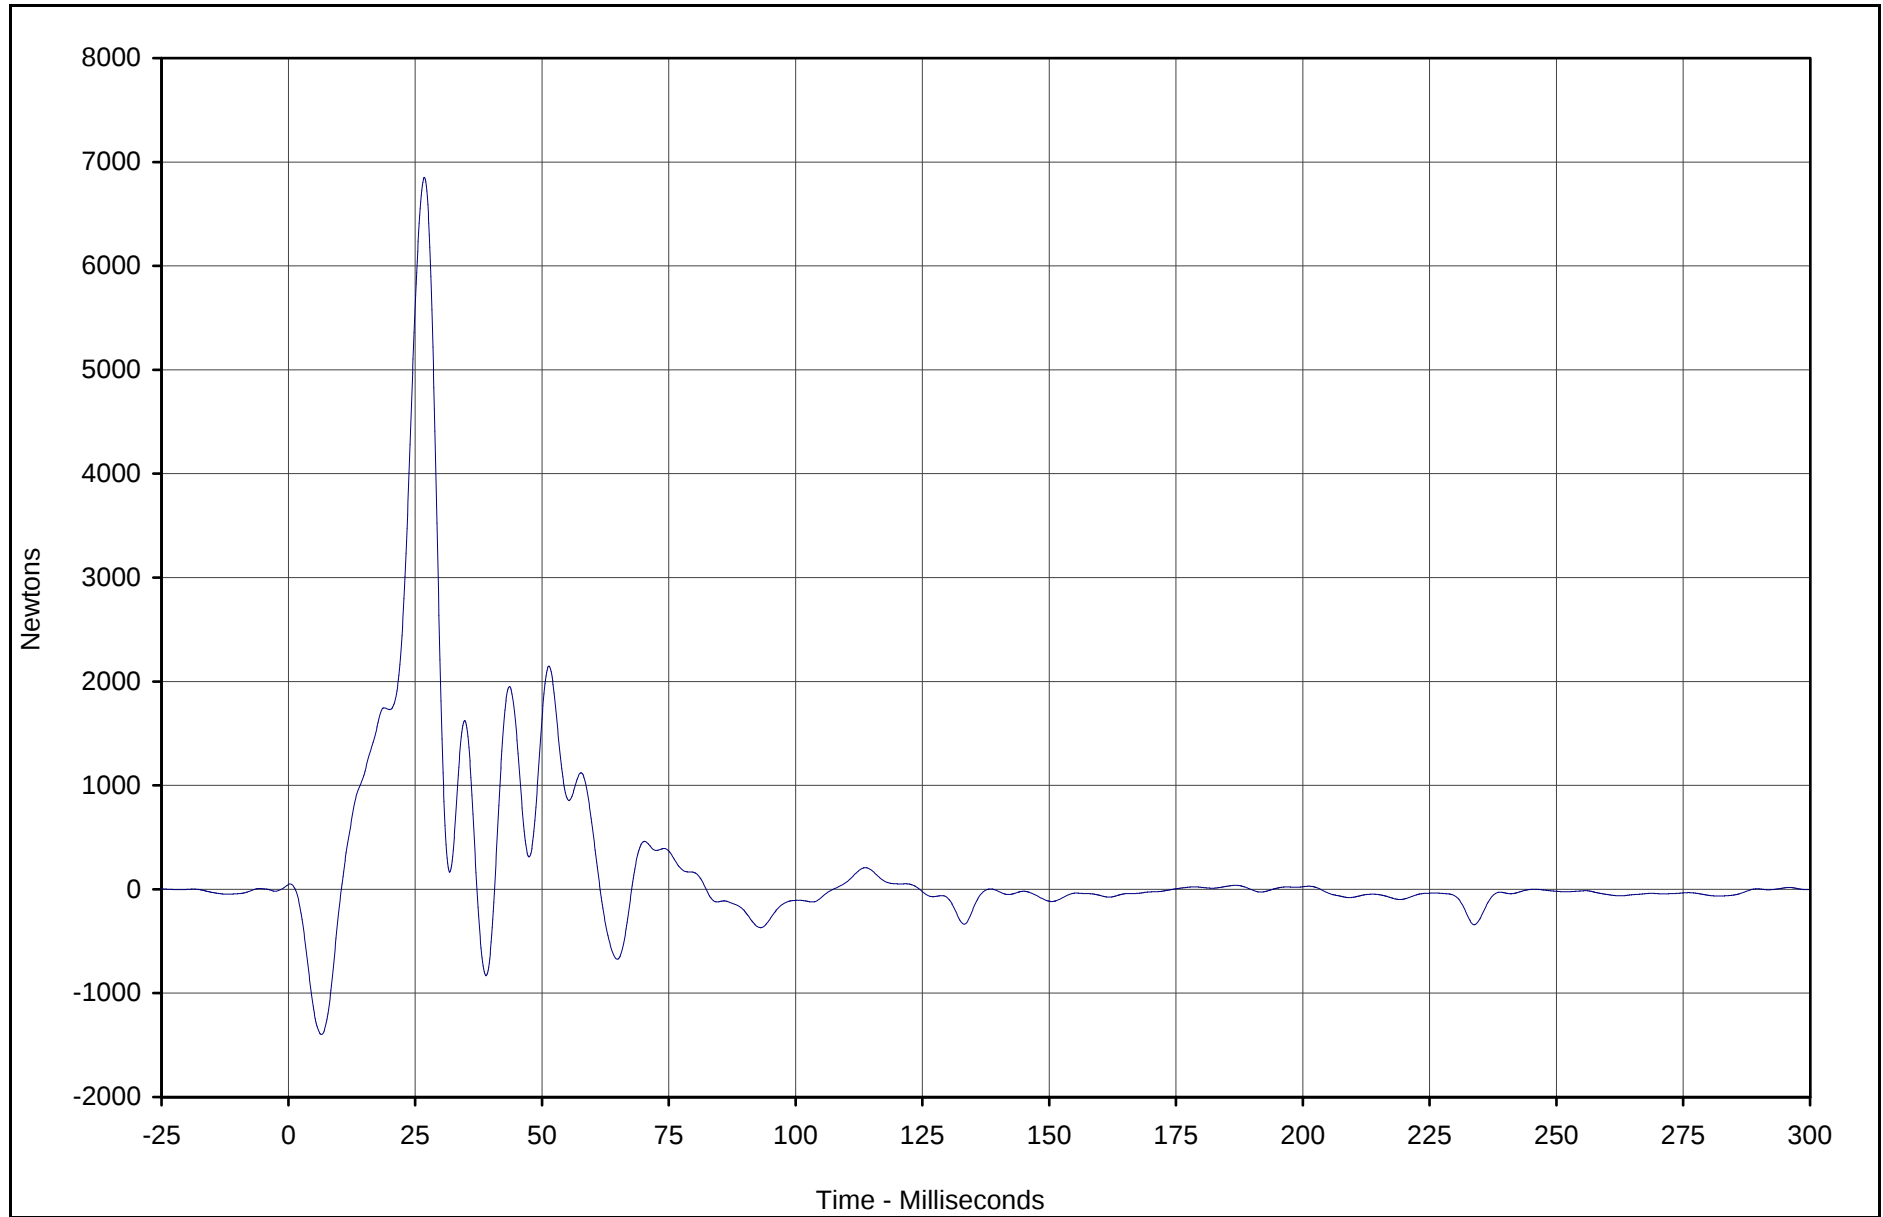

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force D7	131	FIL	Newtons	6851.7	26.8	-1397.0	6.5	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

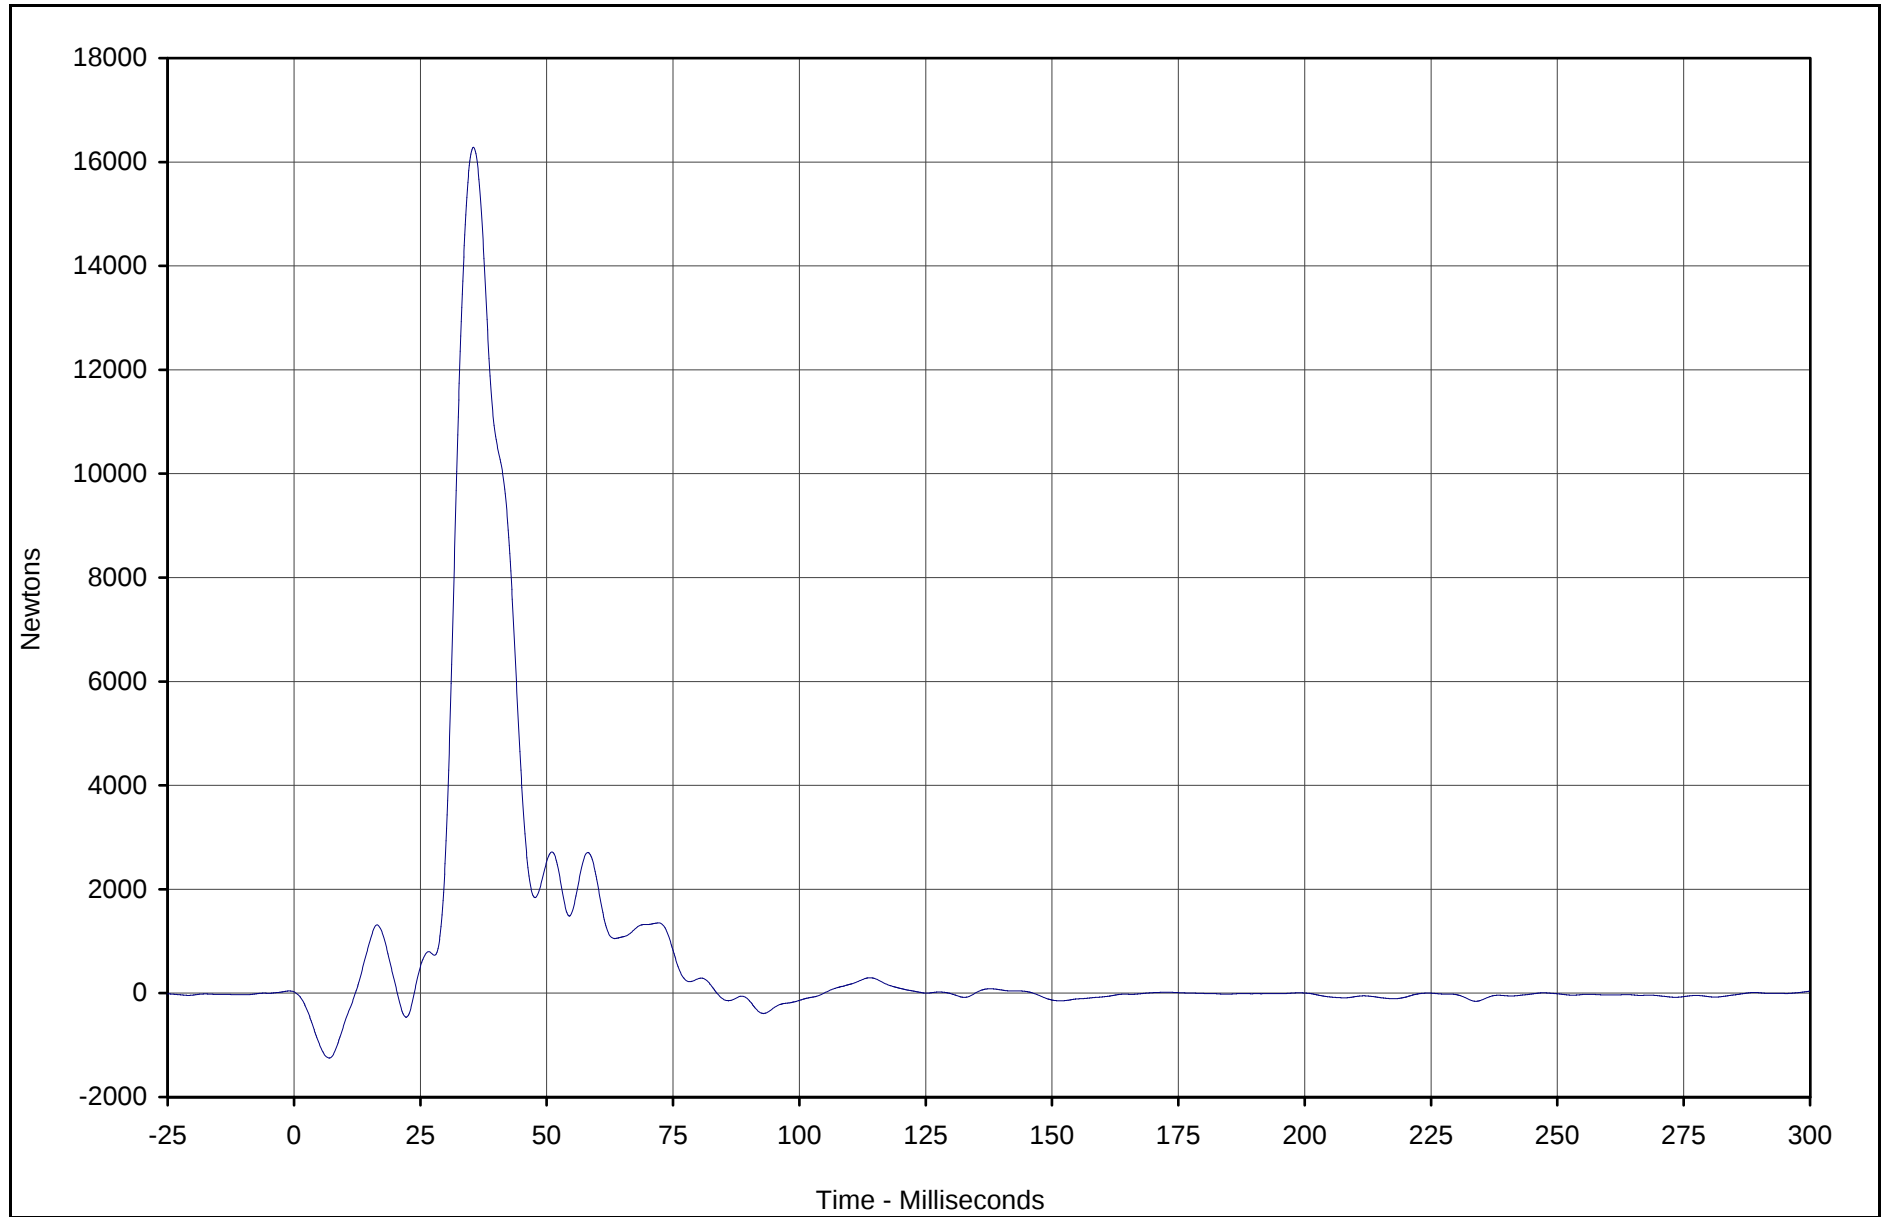

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force D8	132	FIL	Newtons	16284.4	35.5	-1248.5	7.0	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

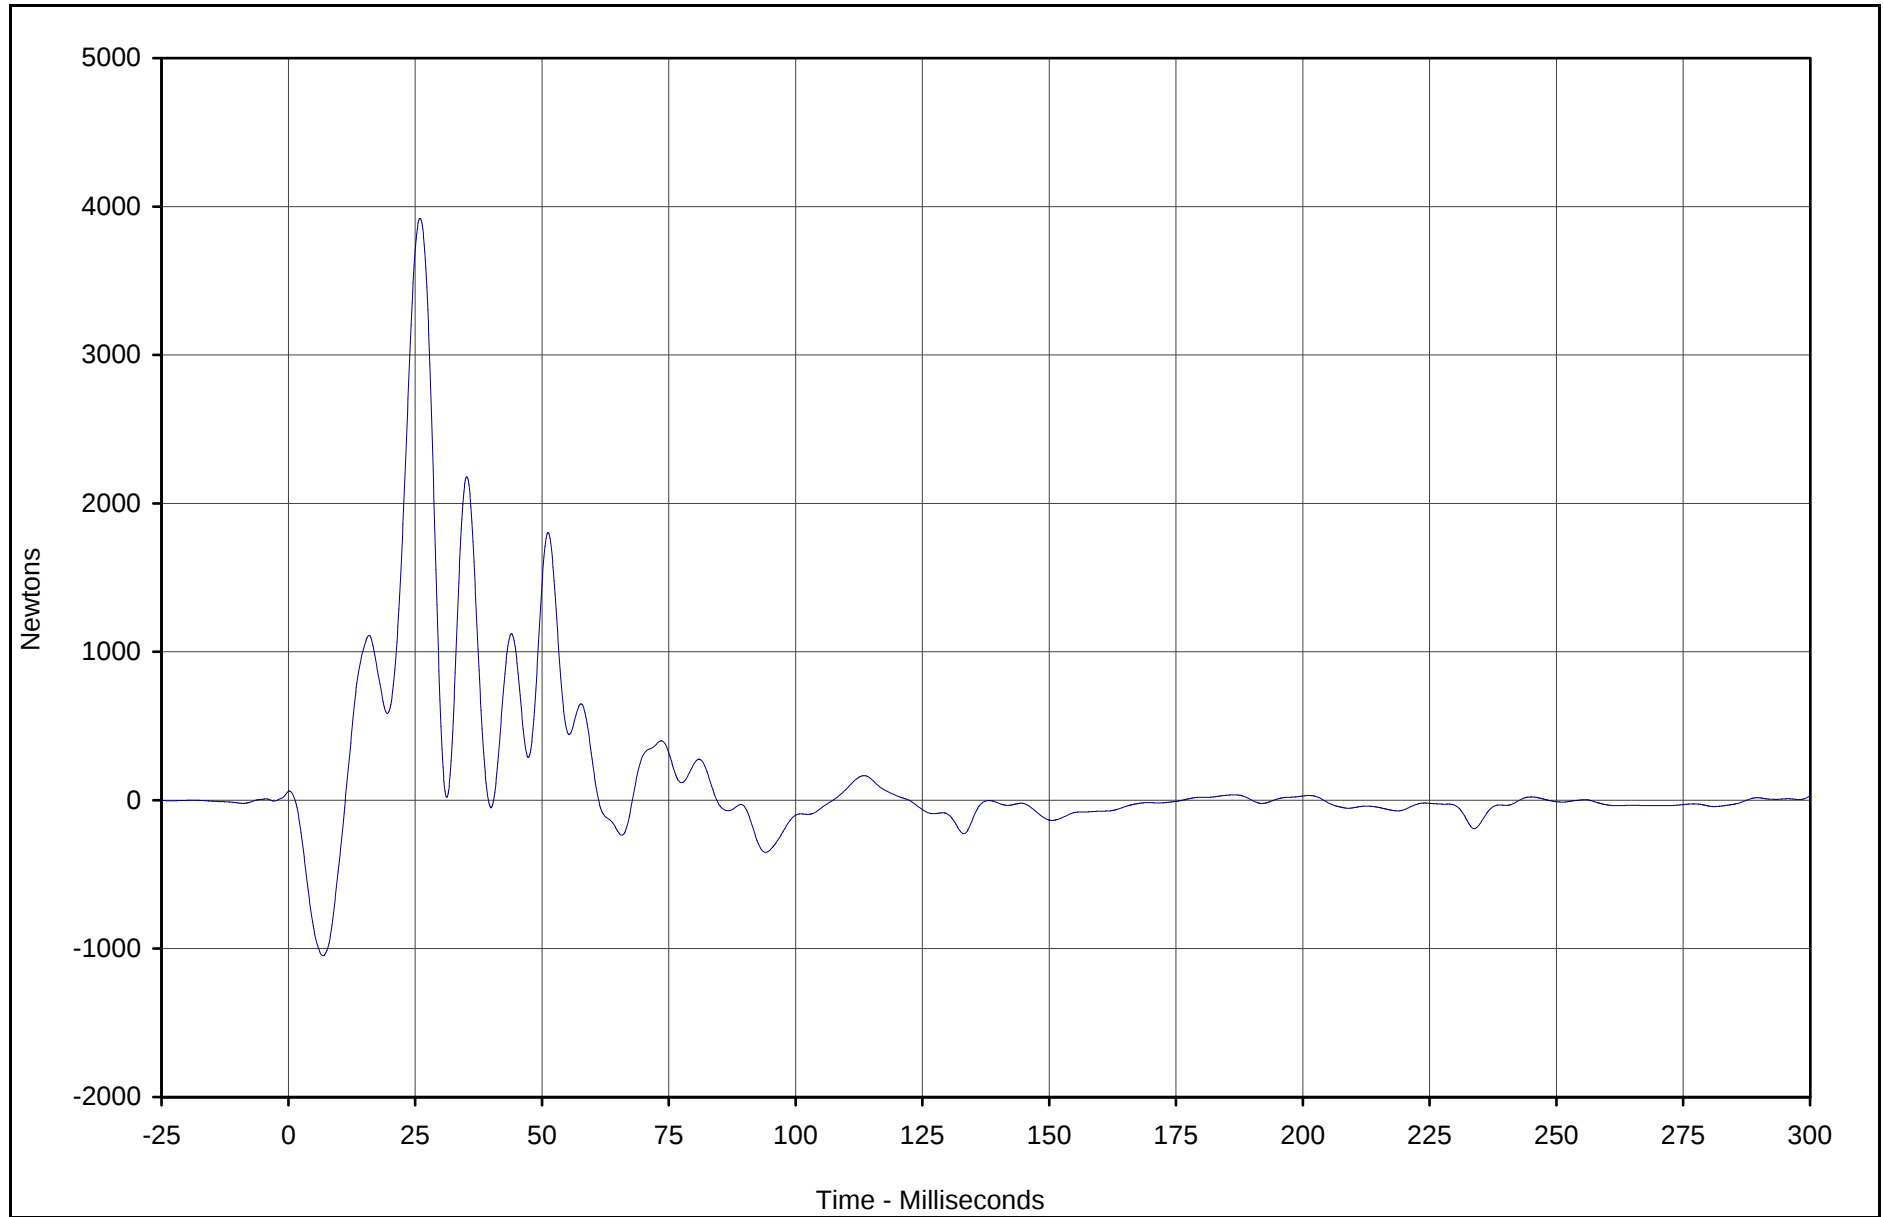

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force D9	133	FIL	Newtons	3920.0	26.0	-1047.7	6.8	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

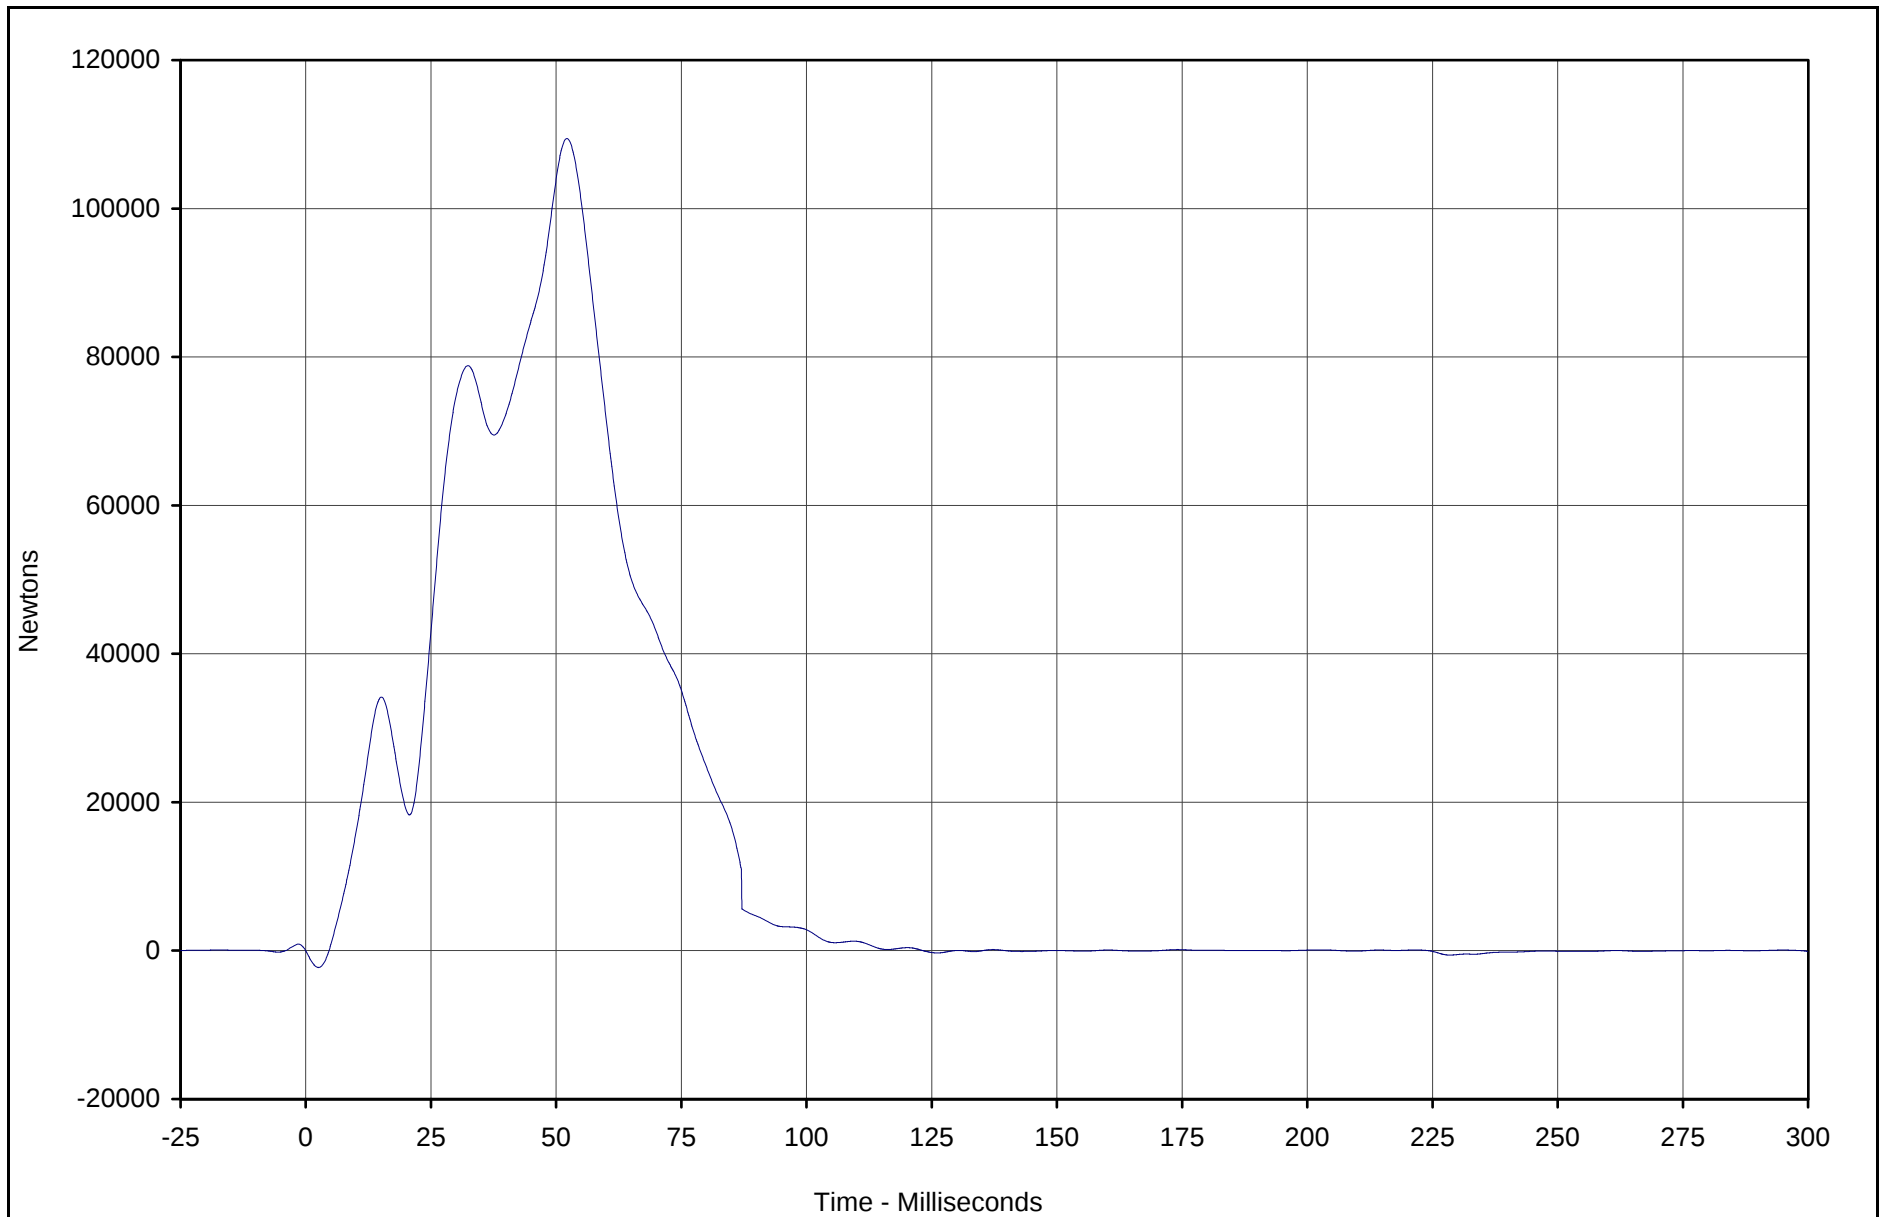

* Includes load cell data which failed during the test.

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force Sum Group 1	001	SUM	Newtons	109438.1	52.2	-2267.5	2.5	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

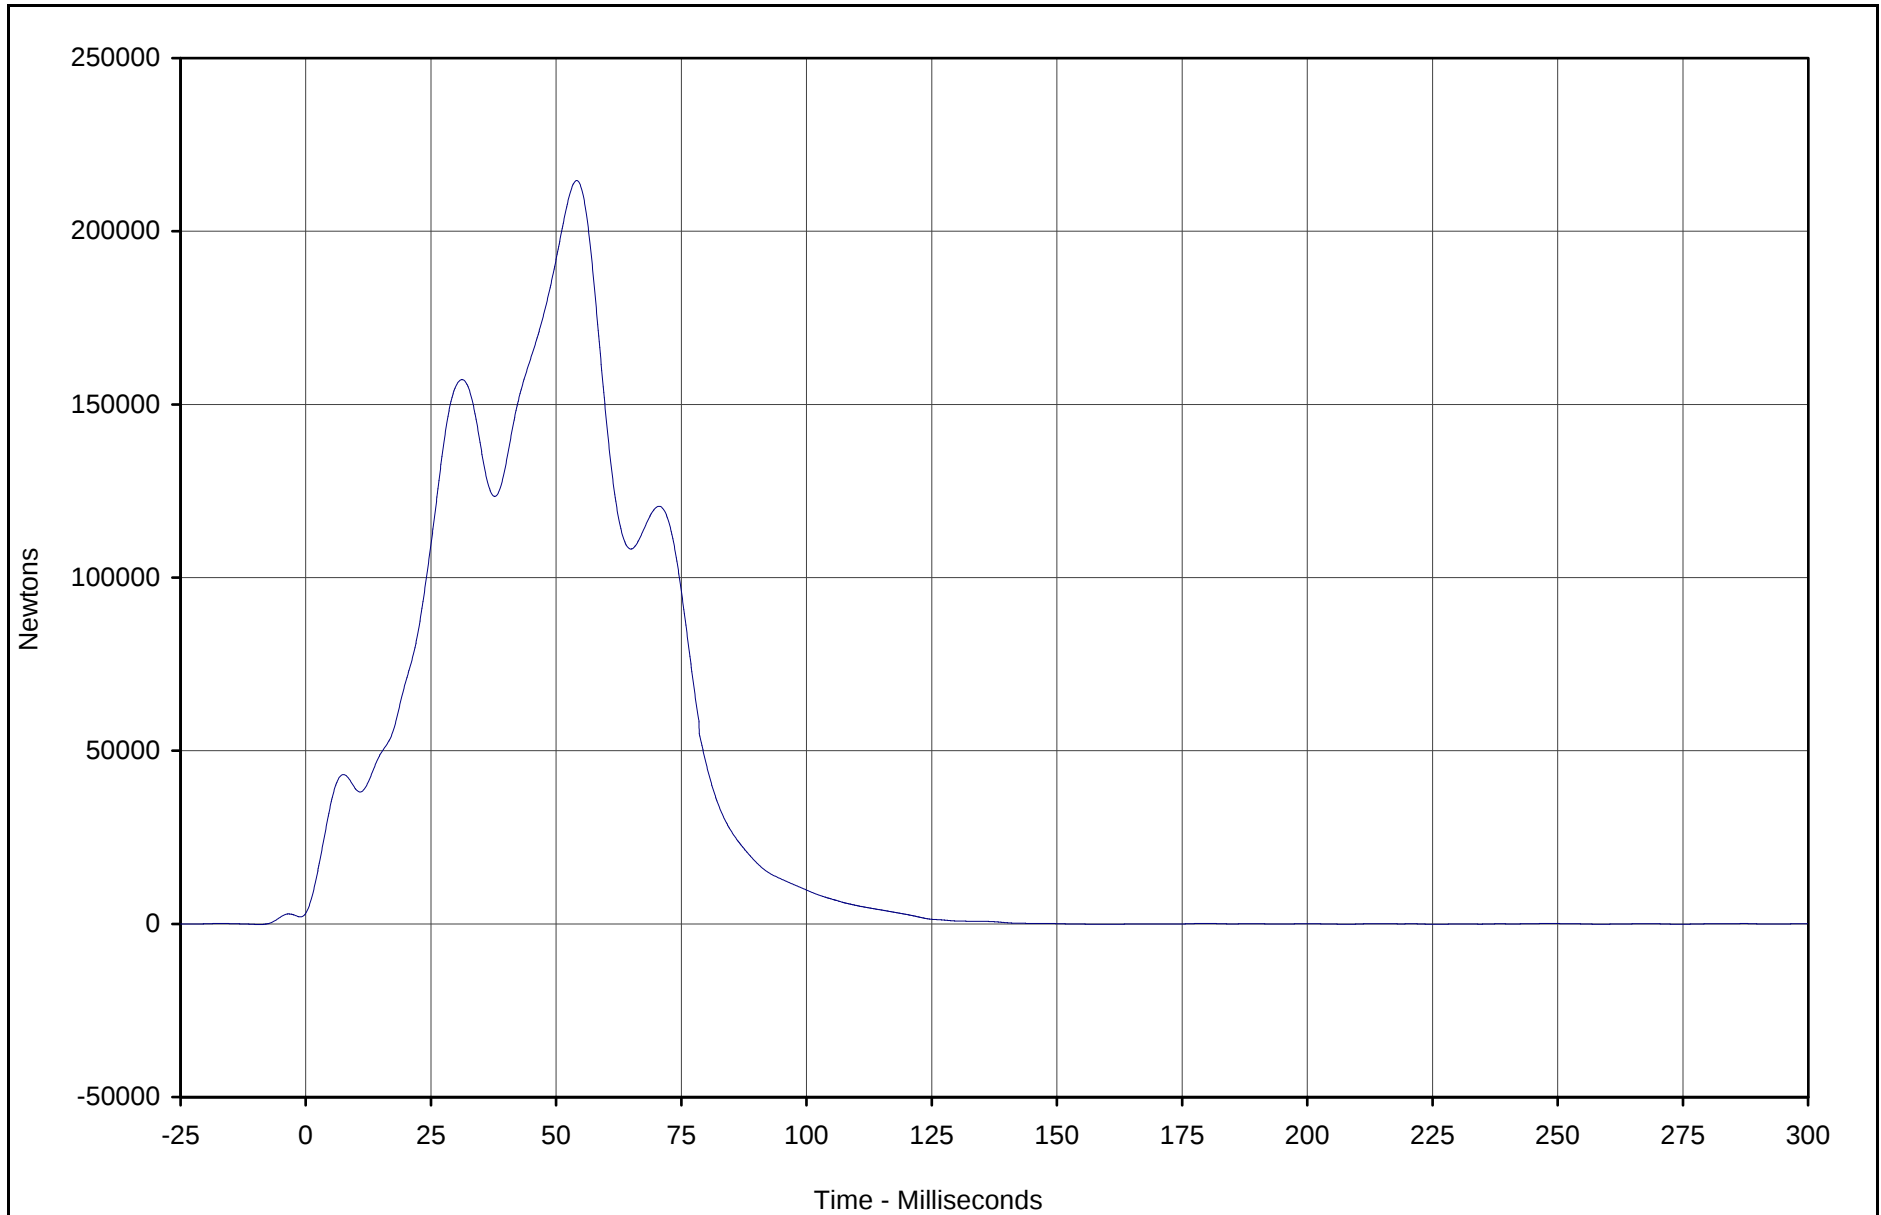

* Includes load cell data which failed during the test.

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force Sum Group 2	002	SUM	Newtons	214654.8	54.1	-138.2	225.9	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

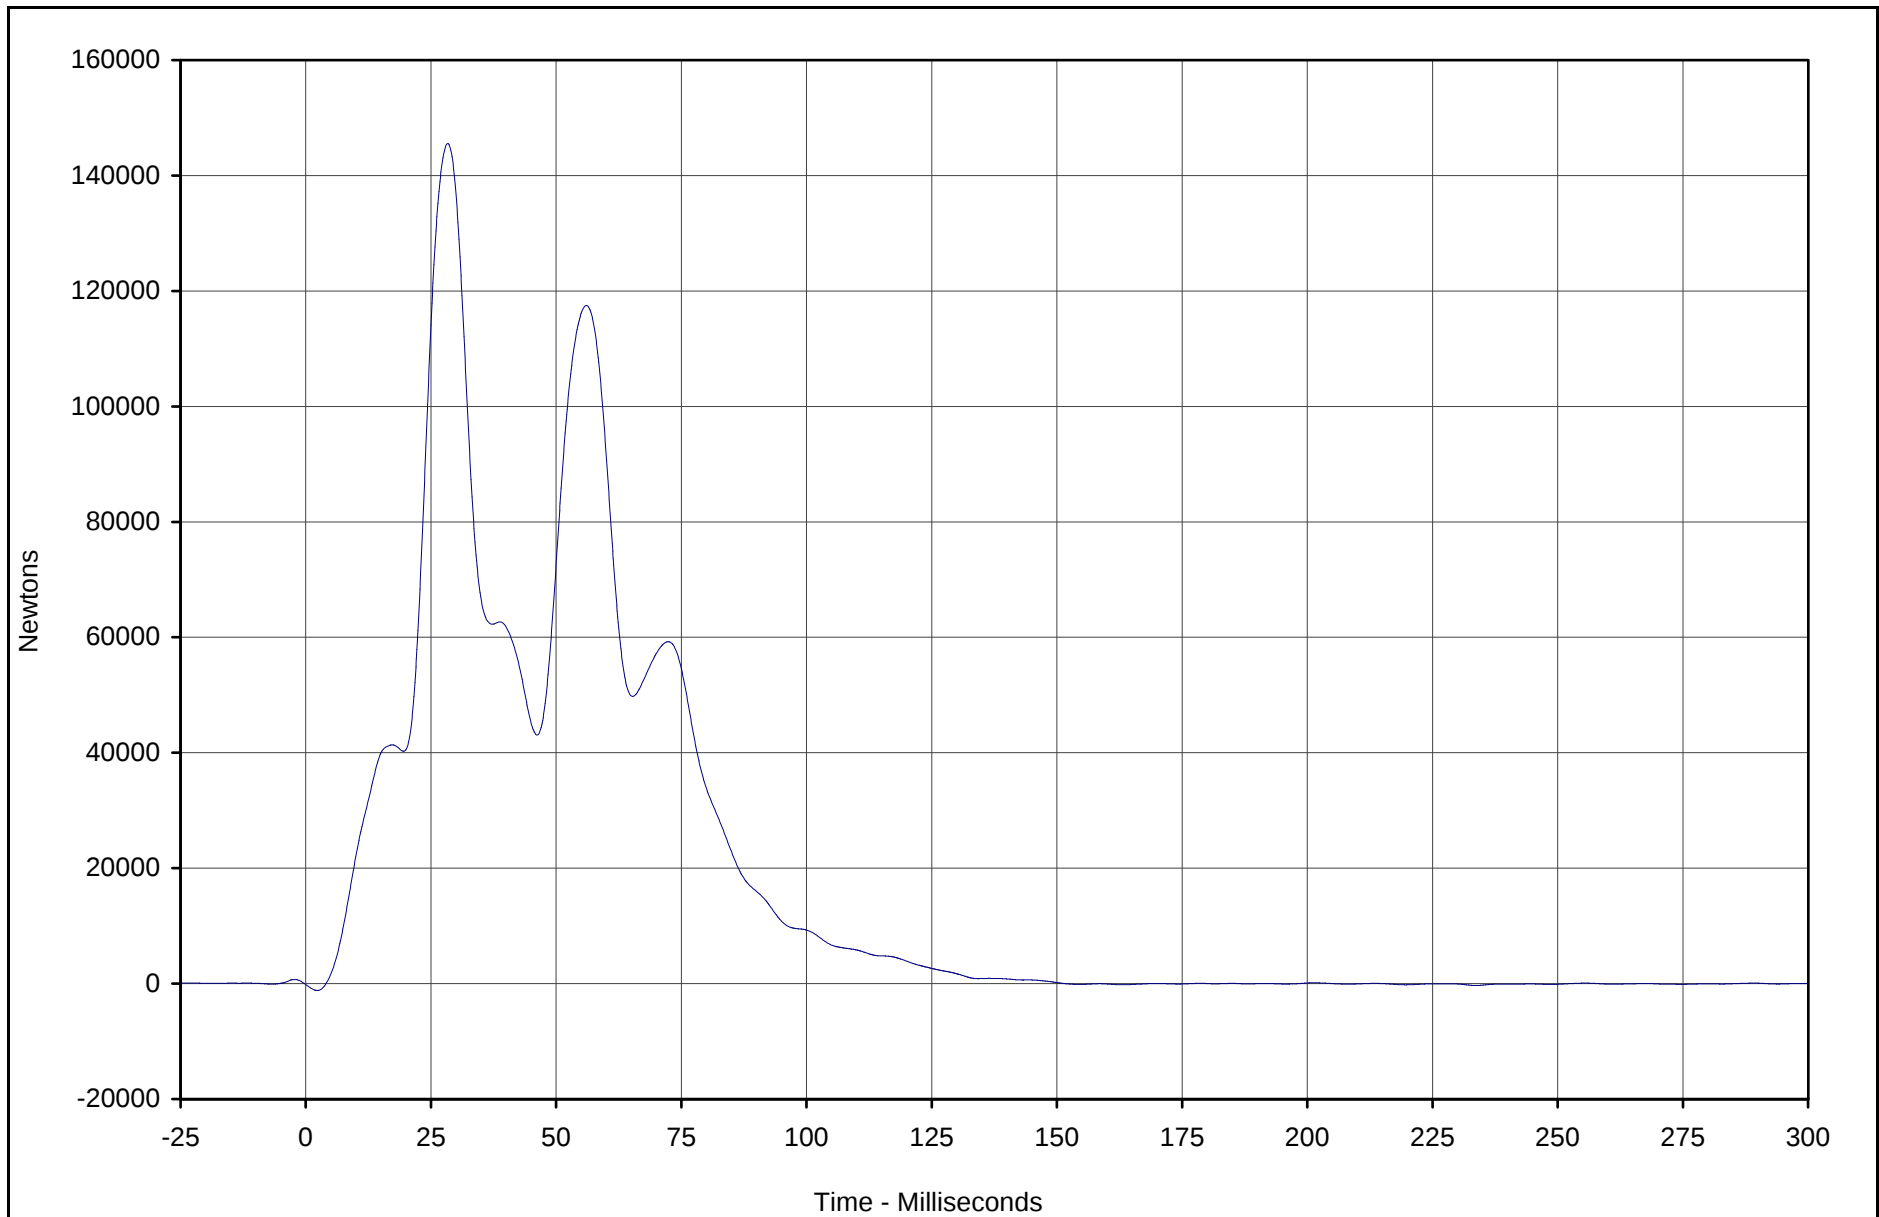

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force Sum Group 3	003	SUM	Newtons	145543.1	28.3	-1198.3	2.3	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

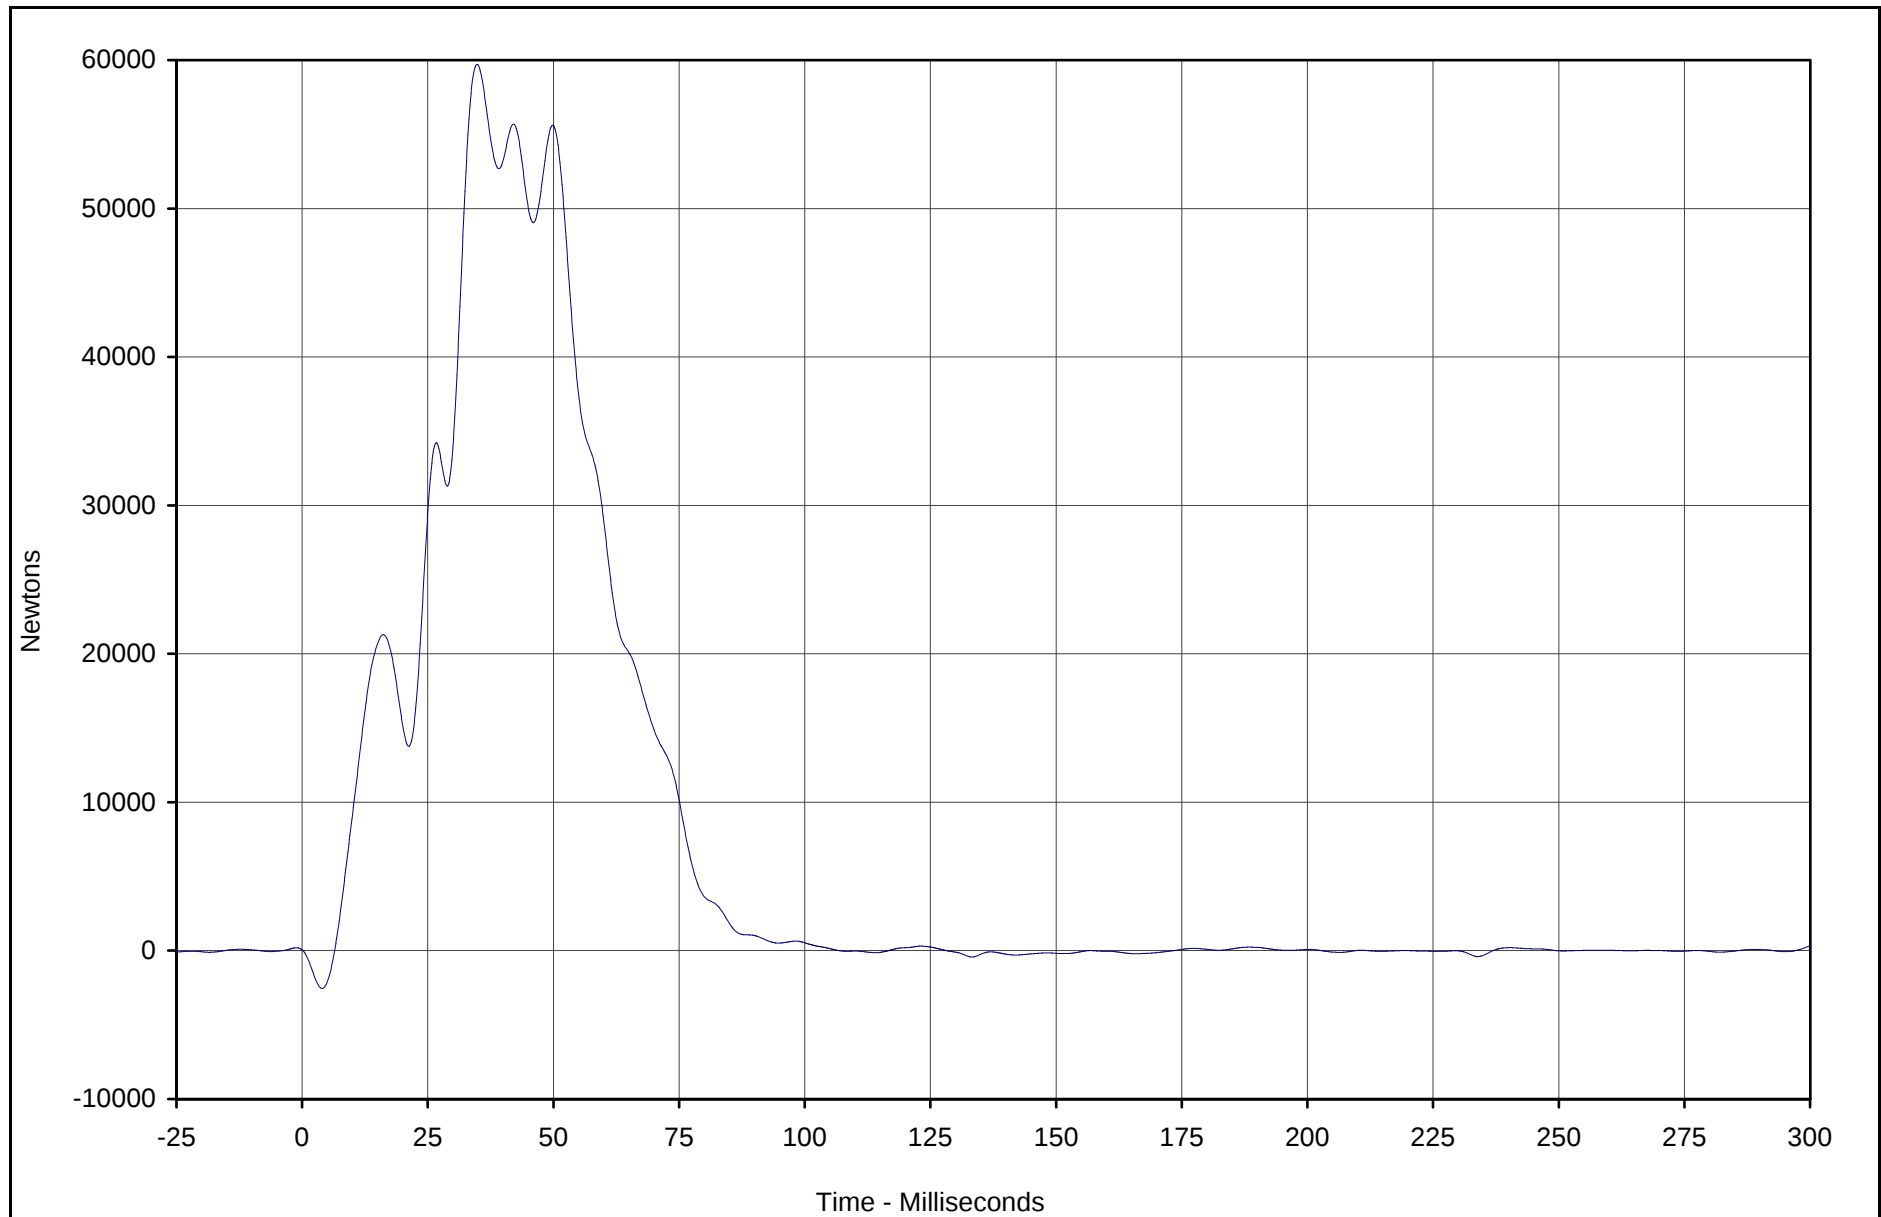

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force Sum Group 4	004	SUM	Newtons	59715.4	34.8	-2545.9	4.0	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

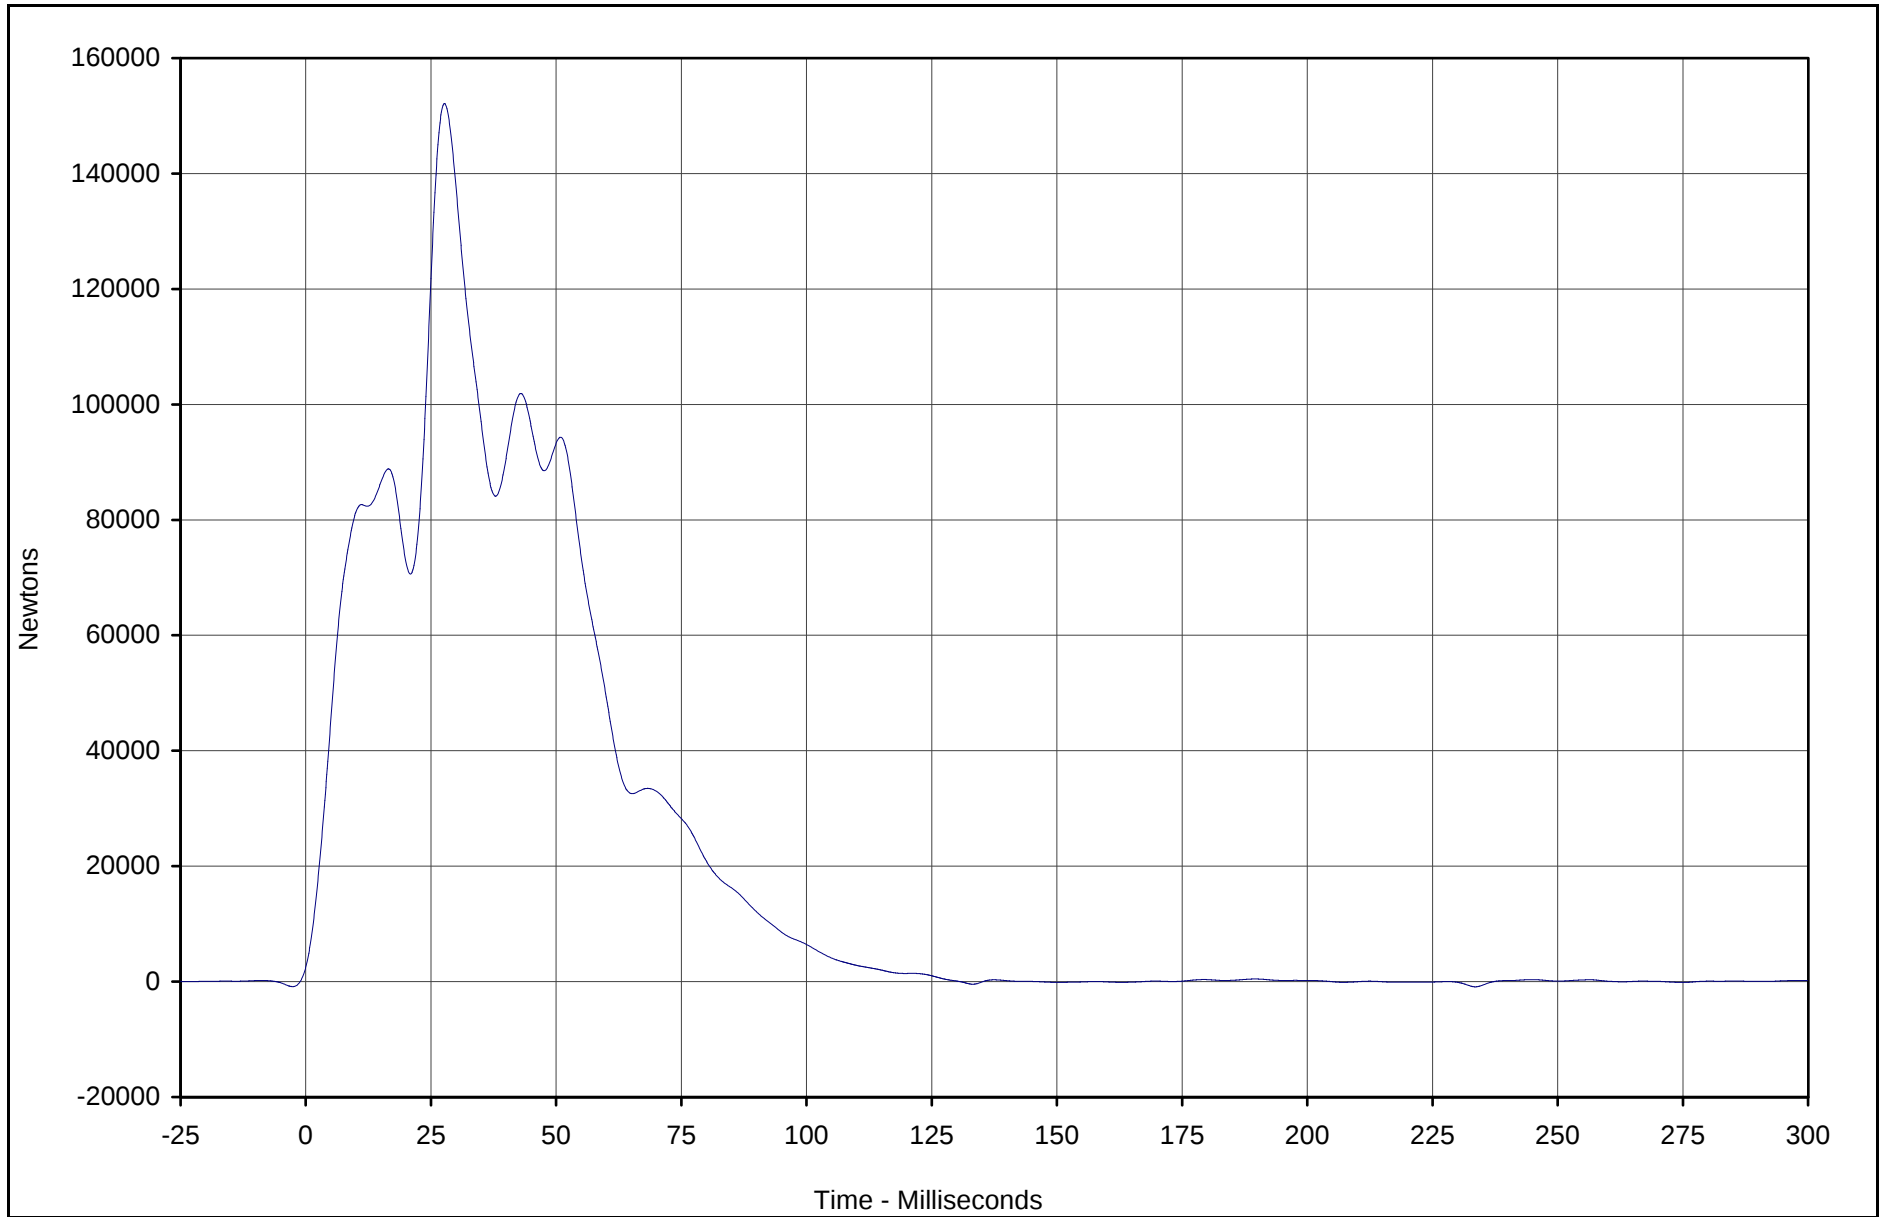

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force Sum Group 5	005	SUM	Newtons	152141.1	27.7	-902.8	233.5	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

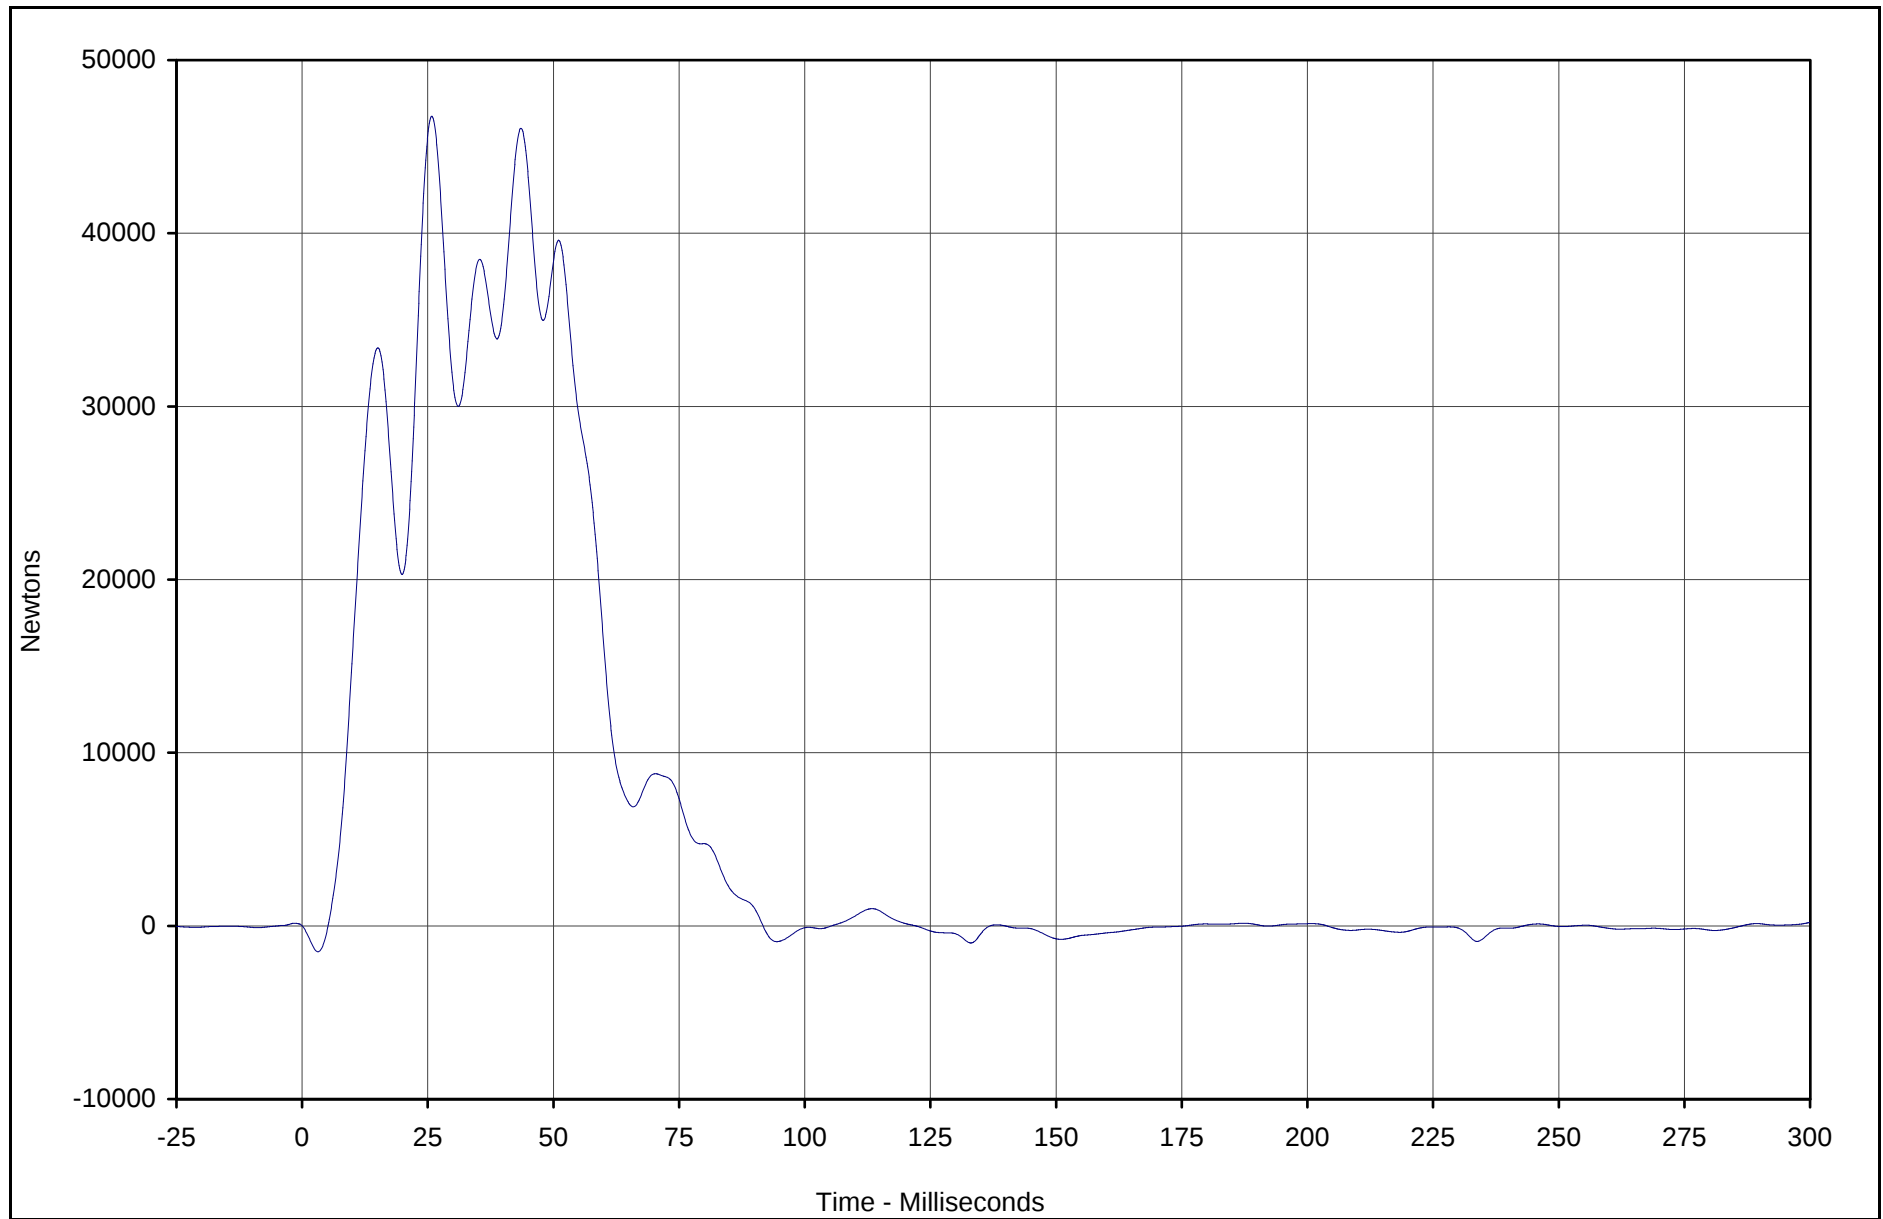

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force Sum Group 6	006	SUM	Newtons	46765.1	25.8	-1492.6	3.1	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

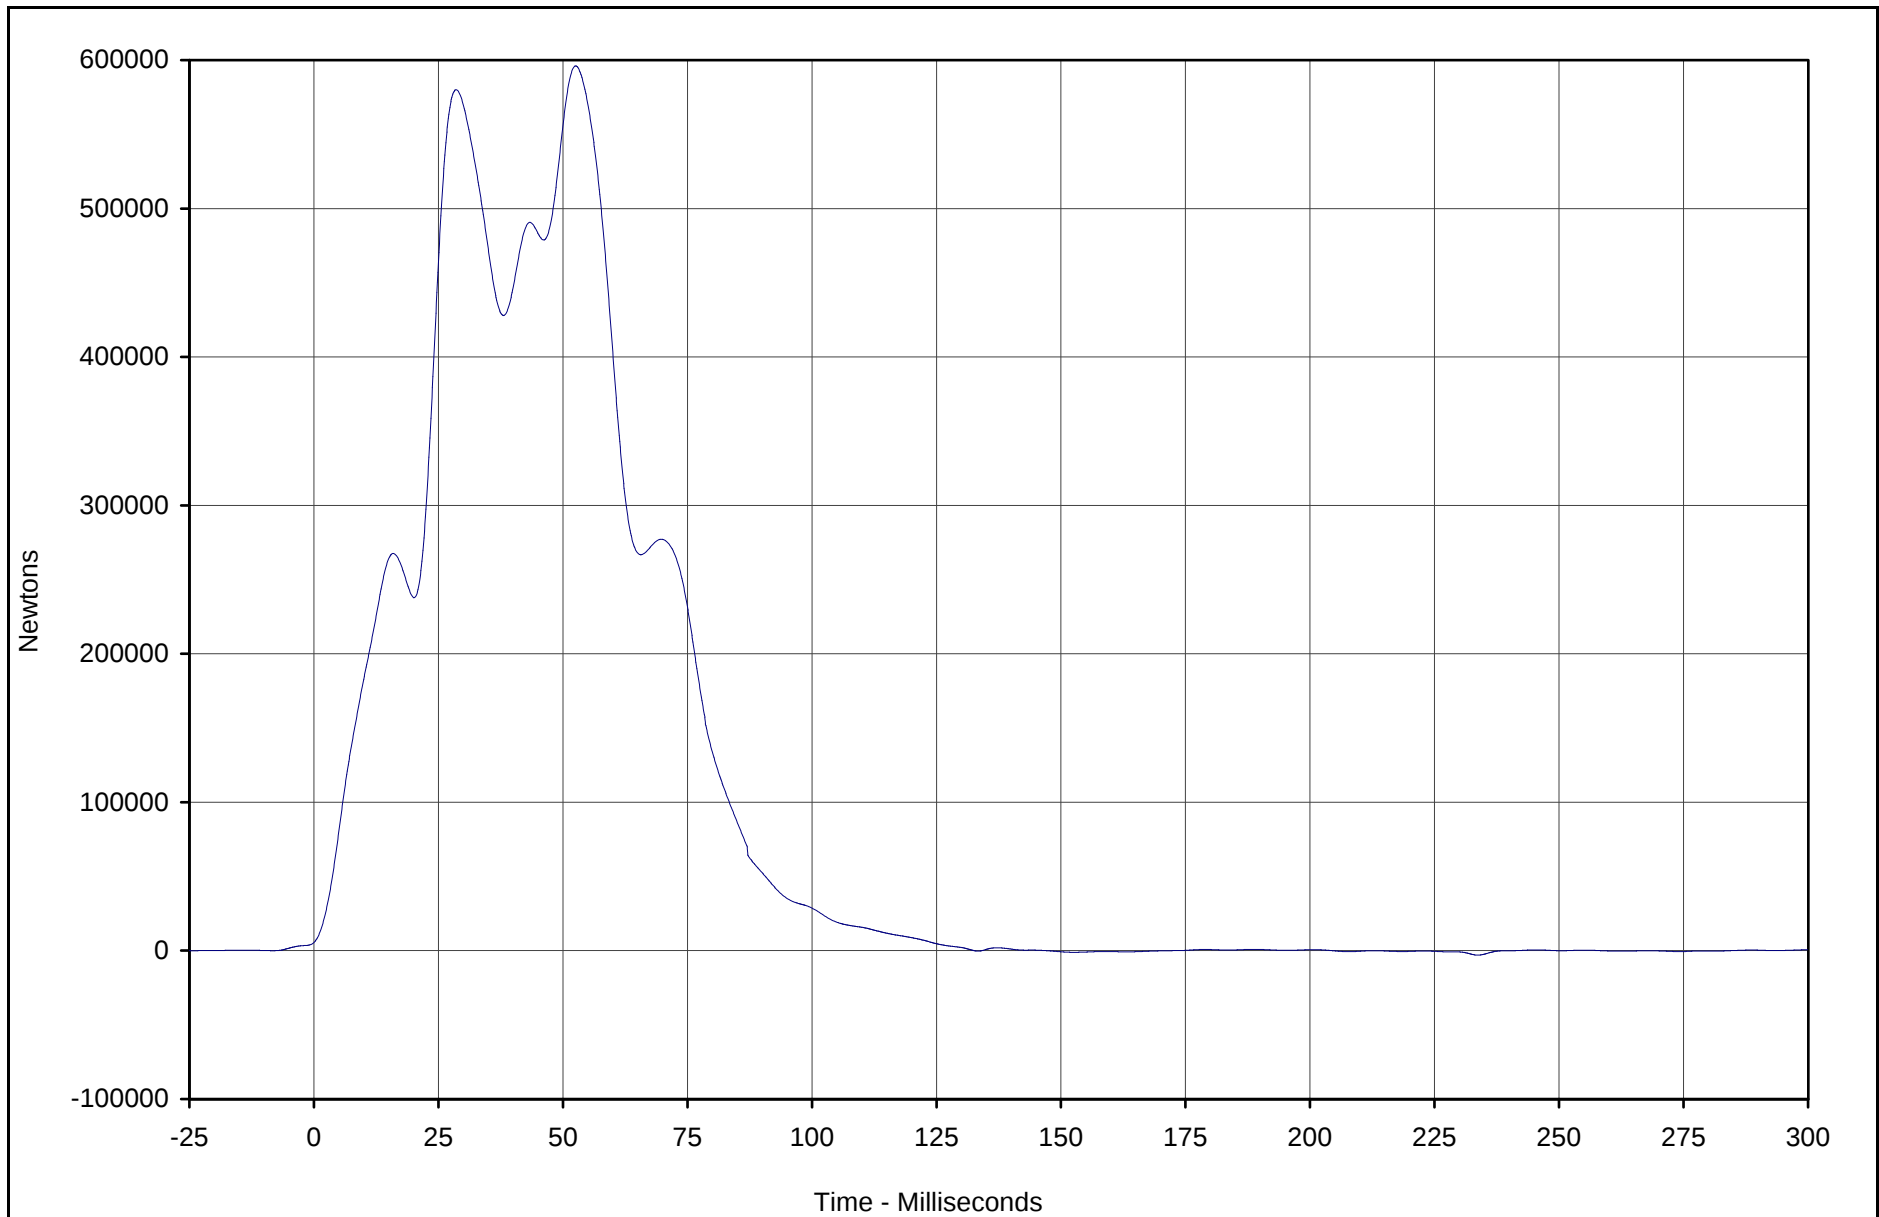

* Includes load cell data which failed during the test.

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Barrier Force Total Sum	007	SUM	Newtons	596099	52.6	-3058.9	233.7	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

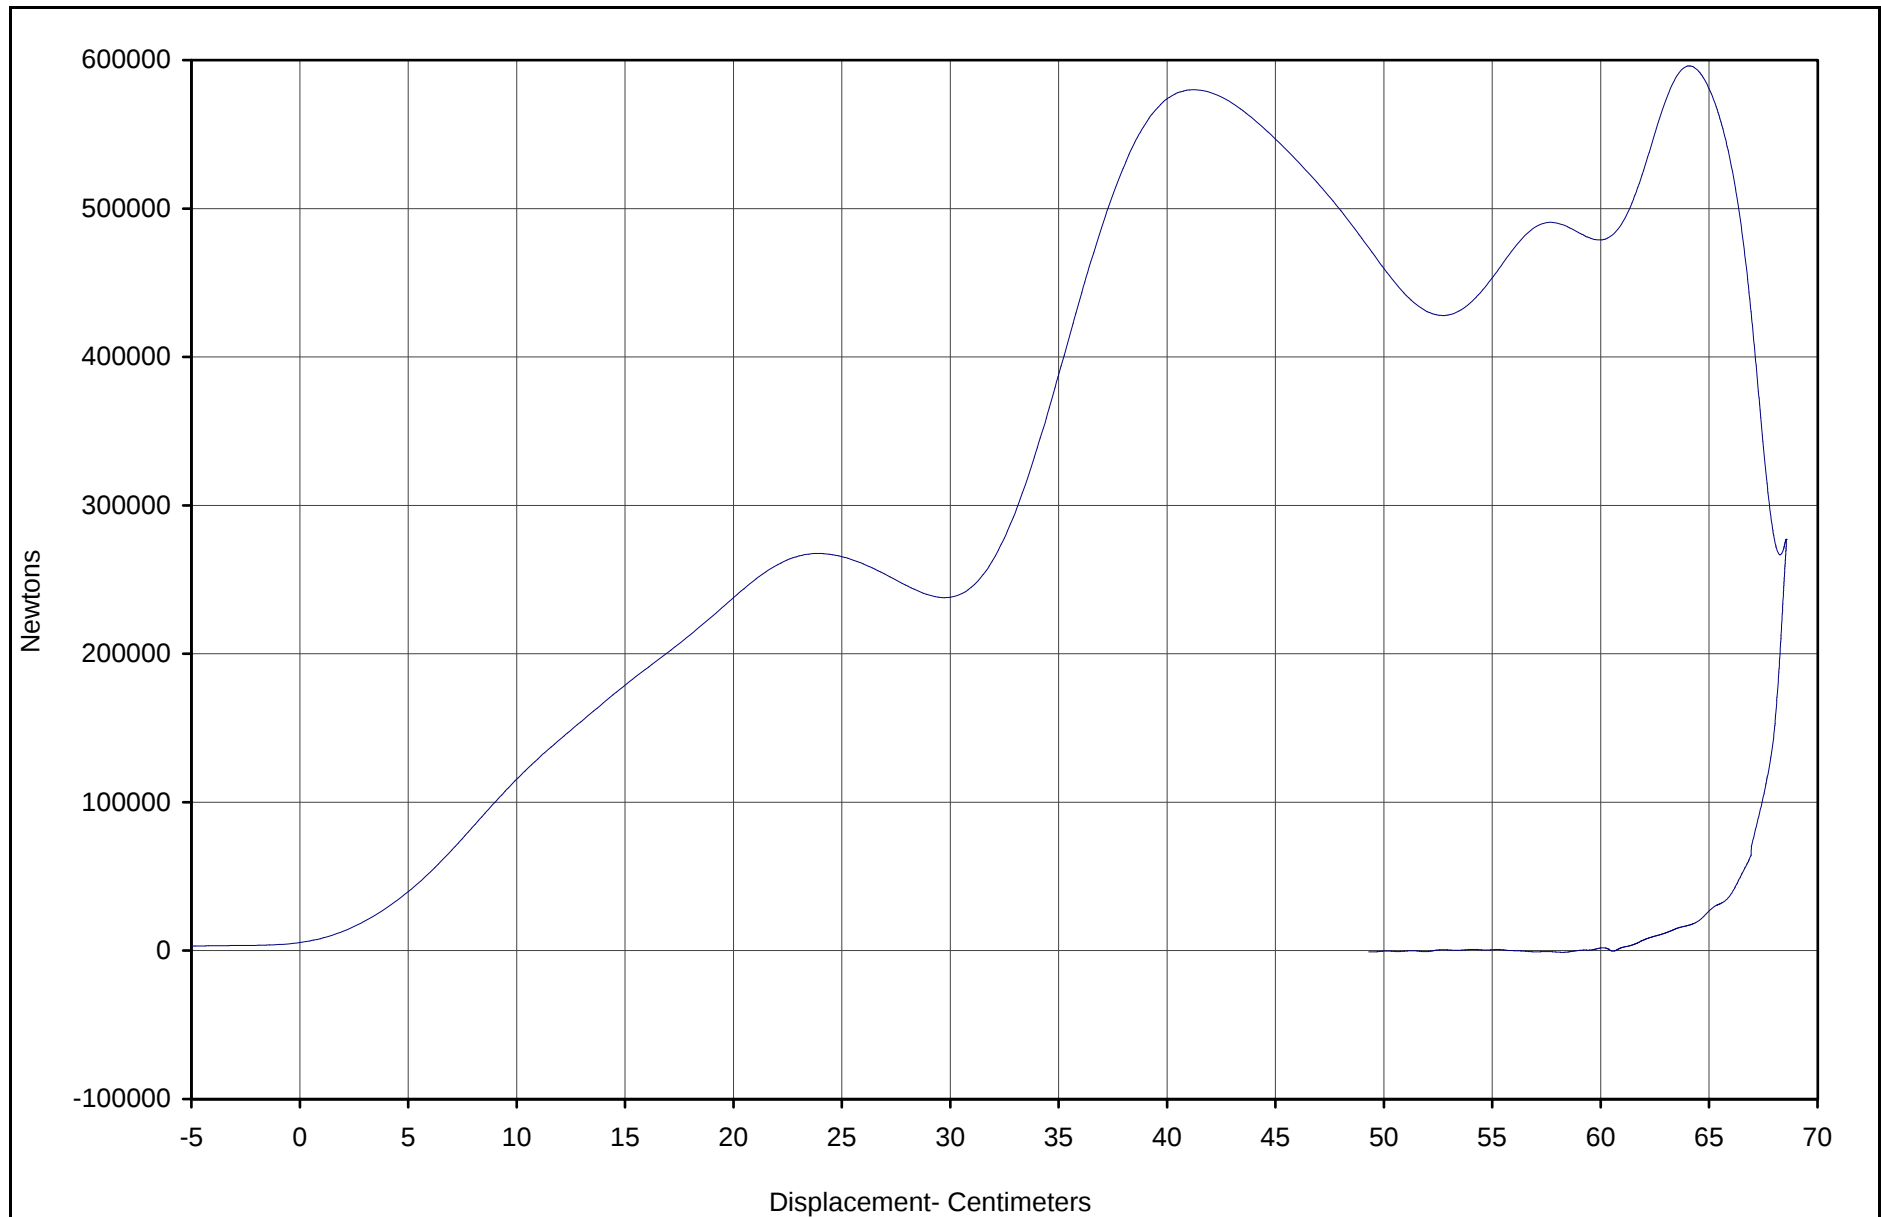

* Includes load cell data which failed during the test.

Curve Description	CURNO	Type	Units	Max	CM	Energy (Joules)	SAE Class
Barrier Force Total Sum vs. Displ.	001	XVY	Newtons	596099	64.1	226240	60



Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

BARRIER LOAD CELL SUMMARY DATA

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

NHTSA No.: M35602

Test Program: 2003 NHTSA 35mph NCAP

Test Date: 2/20/03

Location	Units	Max	Time	Min	Time
Barrier Force A1	Newtons	2572.1	52.0	-1382.0	46.5
Barrier Force A2	Newtons	1817.3	52.2	-1562.0	46.0
Barrier Force A3	Newtons	1067.1	29.5	-1114.9	20.7
Barrier Force A4	Newtons	12396.7	70.3	-875.4	2.9
Barrier Force A5	Newtons	17572.1	71.9	-677.5	12.2
Barrier Force A6	Newtons	0.0	0.0	0.0	0.0
Barrier Force A7	Newtons	5900.4	73.0	-1298.5	20.6
Barrier Force A8	Newtons	2299.8	52.5	-1083.1	46.2
Barrier Force A9	Newtons	3344.1	51.9	-1279.7	46.8
Barrier Force B1	Newtons	1827.2	51.3	-802.2	20.1
Barrier Force B2	Newtons	19027.9	52.4	-364.6	3.0
Barrier Force B3	Newtons	84070.3	52.5	-785.1	2.1
Barrier Force B4	Newtons	96258.0	52.8	-84.7	157.8
Barrier Force B5	Newtons	61027.3	52.6	-42.3	233.8
Barrier Force B6	Newtons	37293.4	55.5	-150.4	226.5
Barrier Force B7	Newtons	137806.2	28.6	-490.5	1.4
Barrier Force B8	Newtons	18642.6	53.0	-369.6	3.3
Barrier Force B9	Newtons	3394.2	51.2	-671.4	30.3
Barrier Force C1	Newtons	1746.6	51.9	-773.0	19.7
Barrier Force C2	Newtons	11491.0	36.5	-422.5	3.9
Barrier Force C3	Newtons	32418.6	33.8	-666.9	2.6
Barrier Force C4	Newtons	66063.5	28.4	-60.5	144.0
Barrier Force C5	Newtons	30840.1	28.3	-168.8	233.8
Barrier Force C6	Newtons	43824.1	28.9	-59.0	233.4
Barrier Force C7	Newtons	30256.5	25.3	-401.5	1.3
Barrier Force C8	Newtons	9116.8	43.7	-638.7	6.4
Barrier Force C9	Newtons	2890.2	35.7	-901.1	29.5
Barrier Force D1	Newtons	1682.4	51.2	-326.2	30.3
Barrier Force D2	Newtons	13953.3	42.6	-870.5	5.7
Barrier Force D3	Newtons	6516.5	35.1	-1053.8	6.1
Barrier Force D4	Newtons	7792.0	18.1	-1209.8	5.7
Barrier Force D5	Newtons	18780.1	12.2	-1635.8	4.6
Barrier Force D6	Newtons	9221.4	17.9	-1624.8	5.4
Barrier Force D7	Newtons	6851.7	26.8	-1397.0	6.5
Barrier Force D8	Newtons	16284.4	35.5	-1248.5	7.0
Barrier Force D9	Newtons	3920.0	26.0	-1047.7	6.8
Barrier Force Sum Group 1	Newtons	109438.1	52.2	-2267.5	2.5
Barrier Force Sum Group 2	Newtons	214654.8	54.1	-138.2	225.9
Barrier Force Sum Group 3	Newtons	145543.1	28.3	-1198.3	2.3
Barrier Force Sum Group 4	Newtons	59715.4	34.8	-2545.9	4.0
Barrier Force Sum Group 5	Newtons	152141.1	27.7	-902.8	233.5
Barrier Force Sum Group 6	Newtons	46765.1	25.8	-1492.6	3.1
Barrier Force Total Sum	Newtons	596098.9	52.6	-3058.9	233.7

1.) Channel failed at 78.6 msec.

2.) Channel failed, no data

3.) Channel failed at 87.1 msec.

APPENDIX D

INSTRUMENTATION DATA CHANNEL ASSIGNMENTS

2003 NHTSA 35mph NCAP
Instrumentation Data Channel Assignments
Driver A.T.D. Serial Number 34
2/20/03
2003 Mitsubishi Outlander 4 Door SUV

CH.	LOCATION	AXIS	IDENT. NO.	DESCRIPTION	MFR	MODEL	UNITS
1	HEAD, PRIMARY	X	KEAC039	Accel.,1/2 bridge	Endevco	7264-2000	G
2	HEAD, PRIMARY	Y	KEAC038	Accel.,1/2 bridge	Endevco	7264-2000	G
3	HEAD, PRIMARY	Z	KEAC027	Accel.,1/2 bridge	Endevco	7264-2000	G
4	HEAD, REDUNDANT	X	KEAC031	Accel.,1/2 bridge	Endevco	7264-2000	G
5	HEAD, REDUNDANT	Y	KEAC032	Accel.,1/2 bridge	Endevco	7264-2000	G
6	HEAD, REDUNDANT	Z	KEAC026	Accel.,1/2 bridge	Endevco	7264-2000	G
7	NECK FORCE	X	GPUN02FX	Load cell, six axis neck	R. A. Denton	1716A	N
8	NECK FORCE	Y	GPUN02FY	Load cell, six axis neck	R. A. Denton	1716A	N
9	NECK FORCE	Z	GPUN02FZ	Load cell, six axis neck	R. A. Denton	1716A	N
10	NECK MOMENT	X	GPUN02MX	Load cell, six axis neck	R. A. Denton	1716A	Nm
11	NECK MOMENT	Y	GPUN02MY	Load cell, six axis neck	R. A. Denton	1716A	Nm
12	NECK MOMENT	Z	GPUN02MZ	Load cell, six axis neck	R. A. Denton	1716A	Nm
13	CHEST , PRIMARY	X	GPAC031	Accel., 1/2 bridge	Endevco	7264-2000	G
14	CHEST , PRIMARY	Y	GPAC024	Accel., 1/2 bridge	Endevco	7264-2000	G
15	CHEST , PRIMARY	Z	GPAC029	Accel., 1/2 bridge	Endevco	7264-2000	G
16	CHEST , REDUNDANT	X	KEAC023	Accel.,1/2 bridge	Endevco	7264-200	G
17	CHEST , REDUNDANT	Y	KEAC022	Accel.,1/2 bridge	Endevco	7264-200	G
18	CHEST , REDUNDANT	Z	KEAC024	Accel.,1/2 bridge	Endevco	7264-200	G
19	CHEST DISPLACEMENT	X	GPCP001	Rotary Pot Chest	Servo	14CBI	MM
20	PELVIS, PRIMARY	X	KEAC019	Accel.,1/2 bridge	Endevco	7264-200	G
21	PELVIS, PRIMARY	Y	KEAC020	Accel.,1/2 bridge	Endevco	7264-200	G
22	PELVIS, PRIMARY	Z	KEAC021	Accel.,1/2 bridge	Endevco	7264-200	G
23	LEFT FEMUR FORCE	Z	KEFF001	Load cell, Femur	R.A. Denton	2121	N
24	RIGHT FEMUR FORCE	Z	KEFF002	Load cell, Femur	R.A. Denton	2121	N

2003 NHTSA 35mph NCAP
Instrumentation Data Channel Assignments
Driver A.T.D. Serial Number 34
2/20/03
2003 Mitsubishi Outlander 4 Door SUV

CH.	LOCATION	AXIS	IDENT. NO.	DESCRIPTION	MFR	MODEL	UNITS
25	UP. TIBIA LEFT MOM.	X	GPOT09MX	2 ch., Upper tibia gage	R. A. Denton	1583	Nm
26	UP. TIBIA LEFT MOM.	Y	GPOT09MY	2 ch., Upper tibia gage	R. A. Denton	1583	Nm
27	UP. TIBIA RIGHT MOM.	X	GPOT09MX	2 ch., Upper tibia gage	R. A. Denton	1583	Nm
28	UP. TIBIA RIGHT MOM.	Y	GPOT09MY	2 ch., Upper tibia gage	R. A. Denton	1583	Nm
29	LWR. TIBIA LEFT MOM.	X	GPLT09MX	3 ch., lower tibia gage	R. A. Denton	3093	Nm
30	LWR. TIBIA LEFT MOM.	Y	GPLT09MY	3 ch., lower tibia gage	R. A. Denton	3093	Nm
31	LWR. TIBIA LEFT FORCE	Z	GPLT09FZ	3 ch., lower tibia gage	R. A. Denton	3093	N
32	LWR. TIBIA RIGHT MOM.	X	GPLT09MX	3 ch., lower tibia gage	R. A. Denton	3093	Nm
33	LWR. TIBIA RIGHT MOM.	Y	GPLT09MY	3 ch., lower tibia gage	R. A. Denton	3093	Nm
34	LWR. TIBIA RIGHT FORCE	Z	GPLT09FZ	3 ch., lower tibia gage	R. A. Denton	3093	N
35	FOOT LEFT, AFT	X	KEIC003X	Accel., Foot Triax	I.C. Sensor	3031-500	G
36	FOOT LEFT, AFT	Z	KEIC003Y	Accel., Foot Triax	I.C. Sensor	3031-500	G
37	FOOT LEFT, FORE	Z	KEIC003Z	Accel., Foot Triax	I.C. Sensor	3031-500	G
38	FOOT RIGHT, AFT	X	KEIC004X	Accel., Foot Triax	I.C. Sensor	3031-500	G
39	FOOT RIGHT, AFT	Z	KEIC004Y	Accel., Foot Triax	I.C. Sensor	3031-500	G
40	FOOT RIGHT, FORE	Z	KEIC004Z	Accel., Foot Triax	I.C. Sensor	3031-500	G
41	LAP BELT FORCE	X	KELC001	Load cell, Seat belt	Lebow	3371	N
42	SHOULDER BELT FORCE	X	KELC002	Load cell, Seat belt	Lebow	3371	N
43	SHOULDER BELT SPOOL	X	KEPP001	Pullout pot	Celesco	PTX101-0030	CM
44	SHOULDER BELT ELONG.	X	KEEP001	Linear pot., belt stretch	E.T.I.	LCP8-10 10K	MM/CM

2003 NHTSA 35mph NCAP
Instrumentation Data Channel Assignments
Passenger A.T.D. Serial Number 35
2/20/03
2003 Mitsubishi Outlander 4 Door SUV

CH.	LOCATION	AXIS	IDENT. NO.	DESCRIPTION	MFR	MODEL	UNITS
45	HEAD, PRIMARY	X	GPAC027	Accel., 1/2 bridge	Endevco	7264-2000	G
46	HEAD, PRIMARY	Y	GPAC002	Accel., 1/2 bridge	Endevco	7264-2000	G
47	HEAD, PRIMARY	Z	GPAC003	Accel., 1/2 bridge	Endevco	7264-2000	G
48	HEAD, REDUNDANT	X	GPAC032	Accel., 1/2 bridge	Endevco	7264-2000	G
49	HEAD, REDUNDANT	Y	GPAC021	Accel., 1/2 bridge	Endevco	7264-2000	G
50	HEAD, REDUNDANT	Z	GPAC026	Accel., 1/2 bridge	Endevco	7264-2000	G
51	NECK FORCE	X	GPUN01FX	Load cell, six axis neck	R. A. Denton	1716A	N
52	NECK FORCE	Y	GPUN01FY	Load cell, six axis neck	R. A. Denton	1716A	N
53	NECK FORCE	Z	GPUN01FZ	Load cell, six axis neck	R. A. Denton	1716A	N
54	NECK MOMENT	X	GPUN01MX	Load cell, six axis neck	R. A. Denton	1716A	Nm
55	NECK MOMENT	Y	GPUN01MY	Load cell, six axis neck	R. A. Denton	1716A	Nm
56	NECK MOMENT	Z	GPUN01MZ	Load cell, six axis neck	R. A. Denton	1716A	Nm
57	CHEST , PRIMARY	X	GPAC005	Accel., 1/2 bridge	Endevco	7264-2000	G
58	CHEST , PRIMARY	Y	GPAC011	Accel., 1/2 bridge	Endevco	7264-2000	G
59	CHEST , PRIMARY	Z	GPAC010	Accel., 1/2 bridge	Endevco	7264-2000	G
60	CHEST , REDUNDANT	X	GPAC034	Accel., 1/2 bridge	Endevco	7264-2000	G
61	CHEST , REDUNDANT	Y	GPAC023	Accel., 1/2 bridge	Endevco	7264-2000	G
62	CHEST , REDUNDANT	Z	GPAC020	Accel., 1/2 bridge	Endevco	7264-2000	G
63	CHEST DISPLACEMENT	X	GPCP002	Rotary Pot Chest	Servo	14CBI	MM
64	PELVIS, PRIMARY	X	GPAC025	Accel., 1/2 bridge	Endevco	7264-2000	G
65	PELVIS, PRIMARY	Y	GPAC022	Accel., 1/2 bridge	Endevco	7264-2000	G
66	PELVIS, PRIMARY	Z	GPAC019	Accel., 1/2 bridge	Endevco	7264-2000	G
67	LEFT FEMUR FORCE	Z	KEFF003	Load cell, Femur	R.A. Denton	2121	N
68	RIGHT FEMUR FORCE	Z	KEFF004	Load cell, Femur	R.A. Denton	2121	N

2003 NHTSA 35mph NCAP
Instrumentation Data Channel Assignments
Passenger A.T.D. Serial Number 35
2/20/03
2003 Mitsubishi Outlander 4 Door SUV

CH.	LOCATION	AXIS	IDENT. NO.	DESCRIPTION	MFR	MODEL	UNITS
69	UP. TIBIA LEFT MOM.	X	GPUT09MX	2 ch., Upper tibia gage	R. A. Denton	1583	Nm
70	UP. TIBIA LEFT MOM.	Y	GPUT09MY	2 ch., Upper tibia gage	R. A. Denton	1583	Nm
71	UP. TIBIA RIGHT MOM.	X	GPUT09MX	2 ch., Upper tibia gage	R. A. Denton	1583	Nm
72	UP. TIBIA RIGHT MOM.	Y	GPUT09MY	2 ch., Upper tibia gage	R. A. Denton	1583	Nm
73	LWR. TIBIA LEFT MOM.	X	GPLT09MX	3 ch., lower tibia gage	R. A. Denton	3093	Nm
74	LWR. TIBIA LEFT MOM.	Y	GPLT09MY	3 ch., lower tibia gage	R. A. Denton	3093	Nm
75	LWR. TIBIA LEFT FORCE	Z	GPLT09FZ	3 ch., lower tibia gage	R. A. Denton	3093	N
76	LWR. TIBIA RIGHT MOM.	X	GPLT09MX	3 ch., lower tibia gage	R. A. Denton	3093	Nm
77	LWR. TIBIA RIGHT MOM.	Y	GPLT09MY	3 ch., lower tibia gage	R. A. Denton	3093	Nm
78	LWR. TIBIA RIGHT FORCE	Z	GPLT09FZ	3 ch., lower tibia gage	R. A. Denton	3093	N
79	FOOT LEFT, AFT	X	KEIC002X	Accel., Foot Triax	I.C. Sensor	3031-500	G
80	FOOT LEFT, AFT	Z	KEIC002Y	Accel., Foot Triax	I.C. Sensor	3031-500	G
81	FOOT LEFT, FORE	Z	KEIC002Z	Accel., Foot Triax	I.C. Sensor	3031-500	G
82	FOOT RIGHT, AFT	X	KEIC001X	Accel., Foot Triax	I.C. Sensor	3031-500	G
83	FOOT RIGHT, AFT	Z	KEIC001Y	Accel., Foot Triax	I.C. Sensor	3031-500	G
84	FOOT RIGHT, FORE	Z	KEIC001Z	Accel., Foot Triax	I.C. Sensor	3031-500	G
85	LAP BELT FORCE	X	KELC003	Load cell, Seat belt	Lebow	3371	N
86	SHOULDER BELT FORCE	X	KELC004	Load cell, Seat belt	Lebow	3371	N
87	SHOULDER BELT SPOOL	X	KEPP001	Pullout pot	Celesco	PTX101-0030	MM
88	SHOULDER BELT ELONG.	X	KEEP001	Linear pot., belt stretch	E.T.I.	LCP8-10 10K	MM/CM

**2003 NHTSA 35mph NCAP
Instrumentation Data Channel Assignments
Vehicle Accelerometers
2/20/03
2003 Mitsubishi Outlander 4 Door SUV**

CH.	LOCATION	AXIS	IDENT. NO.	DESCRIPTION	MFR	MODEL	UNITS
89	Left Rear	X	KEVA002	Accel., Pre-Amp	I.C.S/Karco	3031-500	G
90	Right Rear	X	KEVA006	Accel., Vehicle block	I.C. Sensor	3031-200	G
91	Engine Top	X	KEVA009	Accel., Vehicle block	I.C. Sensor	3031-500	G
92	Engine Bottom	X	KEVA007	Accel., Vehicle block	I.C. Sensor	3031-500	G
93	Left Brake Caliper	X	KEVA008	Accel., Vehicle block	I.C. Sensor	3031-500	G
94	Right Brake Caliper	X	KEVA012	Accel., Vehicle block	I.C. Sensor	3031-500	G
95	Instrument Panel	X	KEVA011	Accel., Vehicle block	I.C. Sensor	3031-200	G
96	Left Rear	Z	KEVA001	Accel., Vehicle block	I.C. Sensor	3031-500	G
97	Right Rear	Z	KEVA010	Accel., Vehicle block	I.C. Sensor	3031-200	G

**2003 NHTSA 35mph NCAP
Instrumentation Data Channel Assignments
Rigid Load Cell Barrier
2/20/03
2003 Mitsubishi Outlander 4 Door SUV**

CH.	LOCATION	AXIS	IDENT. NO.	DESCRIPTION	MFR	MODEL	UNITS
98	BARRIER FORCE A1	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
99	BARRIER FORCE A2	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
100	BARRIER FORCE A3	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
101	BARRIER FORCE A4	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
102	BARRIER FORCE A5	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
103	BARRIER FORCE A6	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
104	BARRIER FORCE A7	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
105	BARRIER FORCE A8	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
106	BARRIER FORCE A9	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
107	BARRIER FORCE B1	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
108	BARRIER FORCE B2	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
109	BARRIER FORCE B3	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
110	BARRIER FORCE B4	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
111	BARRIER FORCE B5	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
112	BARRIER FORCE B6	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
113	BARRIER FORCE B7	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
114	BARRIER FORCE B8	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
115	BARRIER FORCE B9	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N

**2003 NHTSA 35mph NCAP
Instrumentation Data Channel Assignments
Rigid Load Cell Barrier
2/20/03
2003 Mitsubishi Outlander 4 Door SUV**

CH.	LOCATION	AXIS	IDENT. NO.	DESCRIPTION	MFR	MODEL	UNITS
116	BARRIER FORCE C1	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
117	BARRIER FORCE C2	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
118	BARRIER FORCE C3	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
119	BARRIER FORCE C4	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
120	BARRIER FORCE C5	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
121	BARRIER FORCE C6	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
122	BARRIER FORCE C7	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
123	BARRIER FORCE C8	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
124	BARRIER FORCE C9	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
125	BARRIER FORCE D1	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
126	BARRIER FORCE D2	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
127	BARRIER FORCE D3	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
128	BARRIER FORCE D4	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
129	BARRIER FORCE D5	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
130	BARRIER FORCE D6	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
131	BARRIER FORCE D7	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
132	BARRIER FORCE D8	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N
133	BARRIER FORCE D9	X	BARRIER	Load Cell, LCB	Interface	1220-FS	N

APPENDIX E

DUMMY CALIBRATION DATA



Calibration Data Sheet

Hybrid III 50th Percentile Male

Knee Impact Test

ATD Serial No.: 034

Location: Left Knee

Test I.D.: LK01C

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	18.9 to 25.6	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Pendulum Velocity at T=0	m/sec	2.07 to 2.13	2.10	Pass
Peak Probe Force	N	4715 to 5782	5622	Pass
Overall Test Results				Pass

ATD Serial No.: 034


Location: Right Knee

Test I.D.: RK01C

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	18.9 to 25.6	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Pendulum Velocity at T=0	m/sec	2.07 to 2.13	2.11	Pass
Peak Probe Force	N	4715 to 5782	5212	Pass
Overall Test Results				Pass


Laboratory Technician

February 14, 2003
Test Date

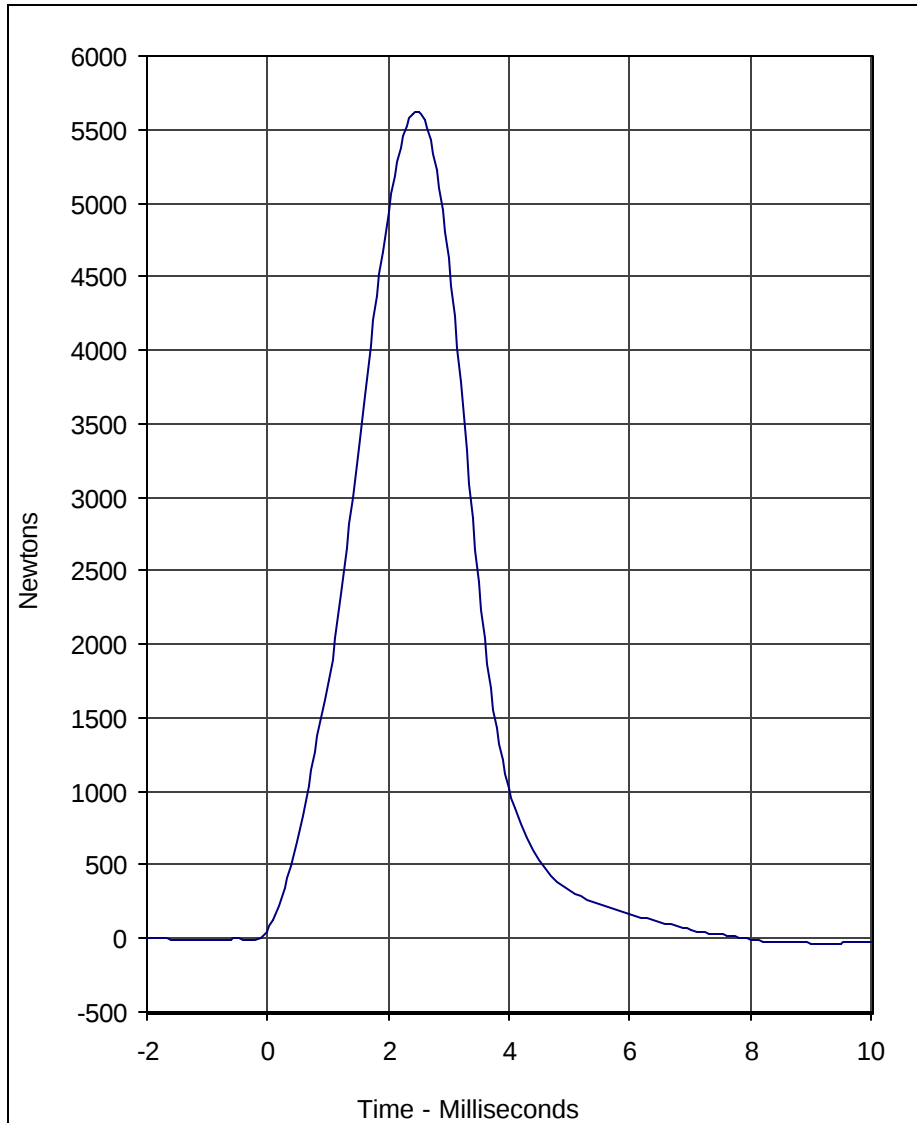

Curve Description		Location	Test I.D.	CURNO	Type
Probe Force		Left Knee	LK01C	001	FIL
Units	Max	Time	Min	Time	SAE Class
Newtons	5622.4	2.5	-38.9	9.2	600

Test Program: Hybrid III 50th Percentile Male Knee Impact Test
 Test Date: 2/14/03

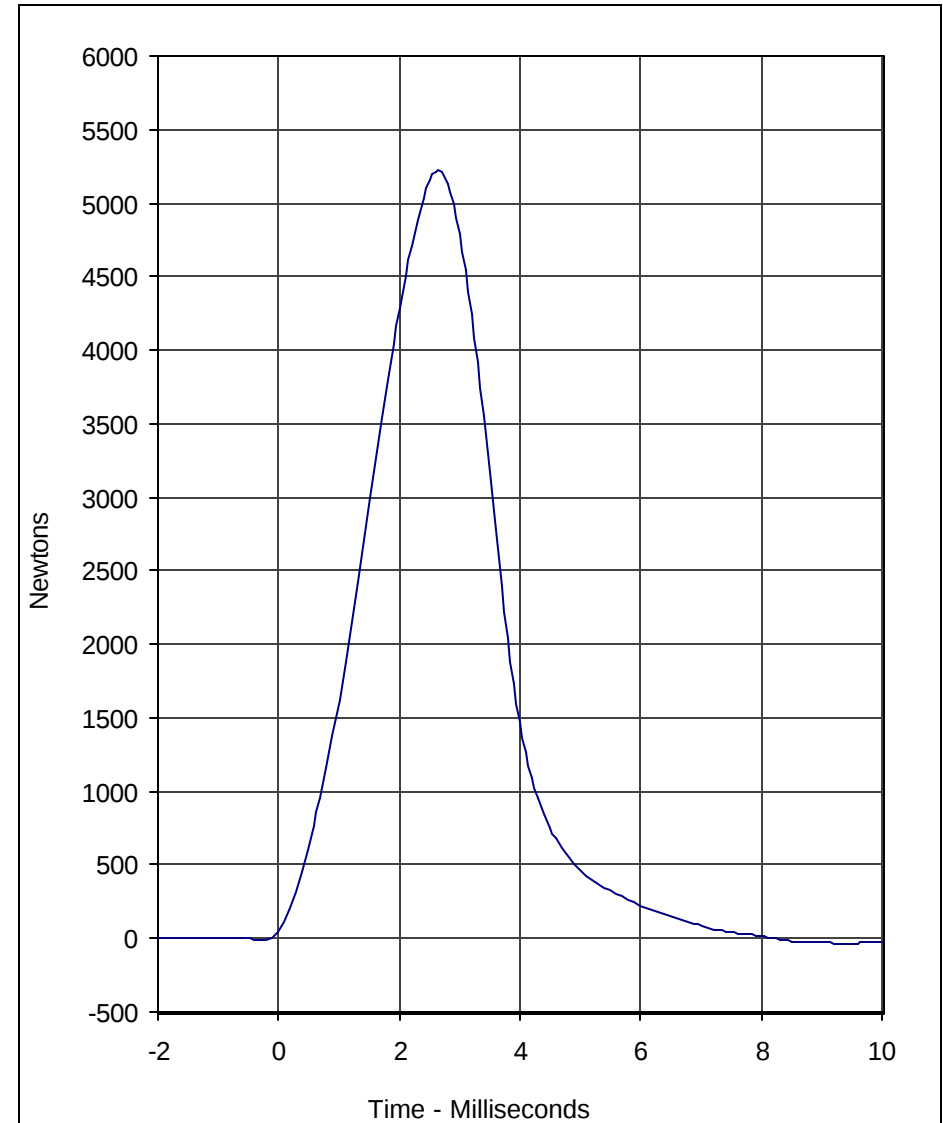

Curve Description		Location	Test I.D.	CURNO	Type
Probe Force		Right Knee	RK01C	002	FIL

Units	Max	Time	Min	Time	SAE Class
Newtons	5212.0	2.6	-38.8	9.4	600

A.T.D. Serial No.: 034





Calibration Data Sheet

Hybrid III 50th Percentile Male

Head Drop Test

ATD Serial No.: 034


Test I.D.: HD01C

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	18.9 to 25.6	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Peak Resultant Acceleration	G's	225.0 to 275.0	234.0	Pass
Peak Lateral Acceleration	G's	≤15.0	9.2	Pass
Is Acceleration Unimodal?	Yes/No	Yes	Yes	Pass
Overall Test Results				Pass

Laboratory Technician


February 14, 2003

Test Date

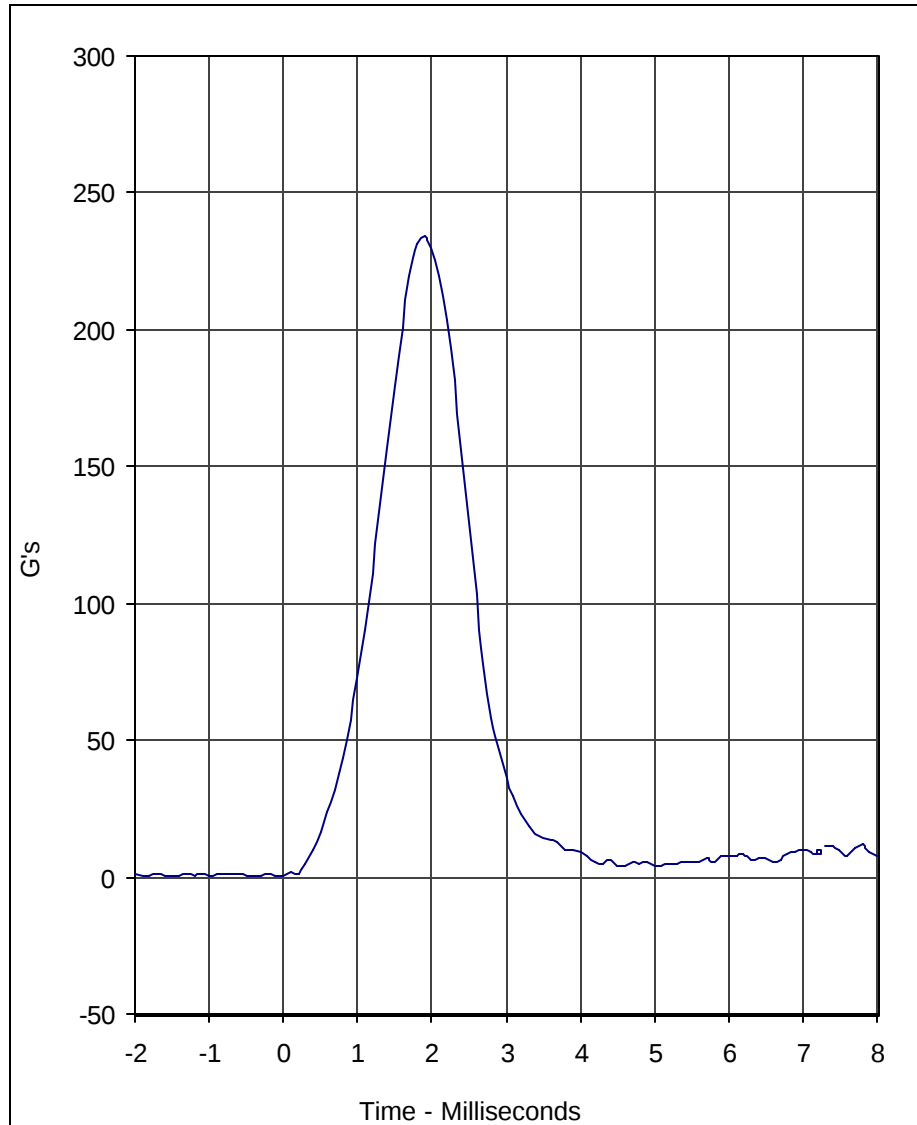

Curve Description				CURNO	Type
Head Resultant				001	RES
Units	Max	Time	Min	Time	SAE Class
G's	234.0	1.9	0.3	-1.5	1000

Test Program: Hybrid III 50th Percentile Male Head Drop Test
 Test Date: 2/14/03

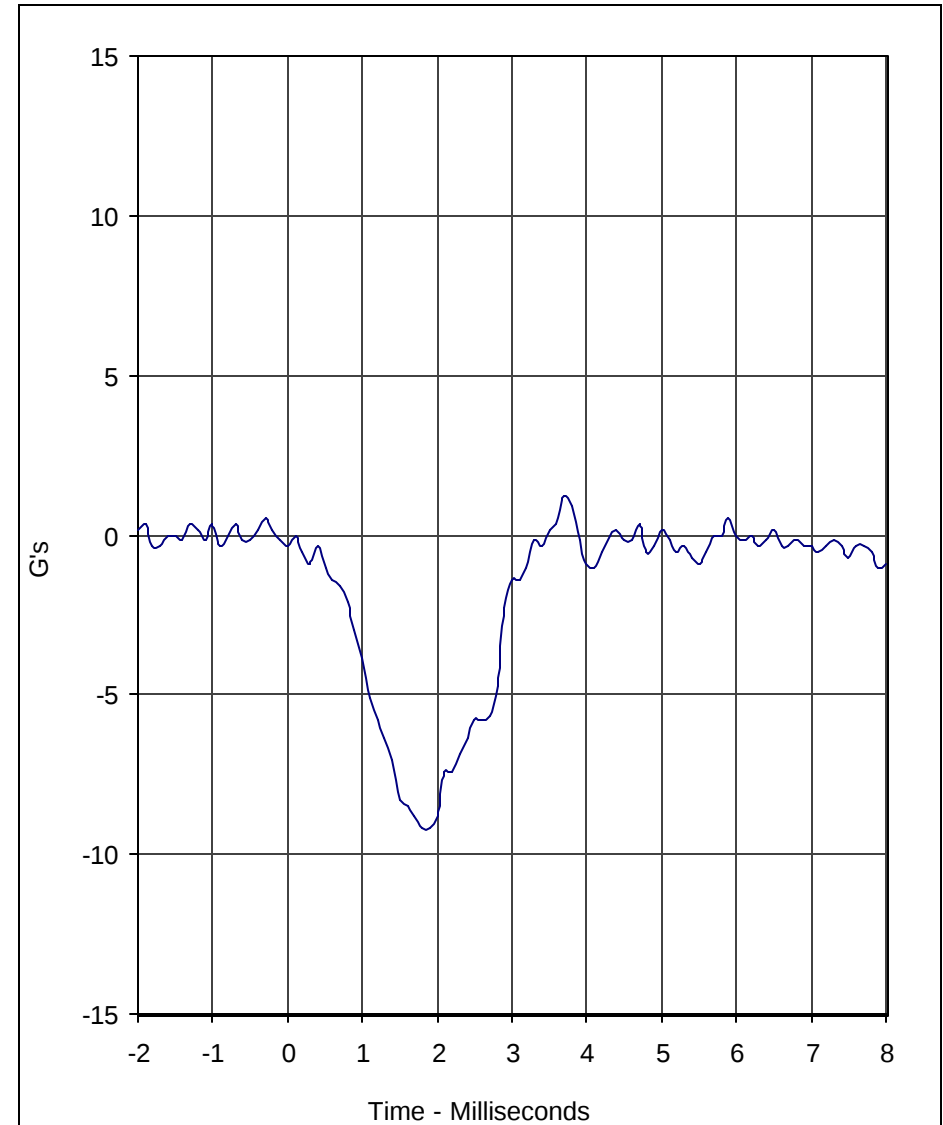

Curve Description				CURNO	Type
Head Y				002	FIL
Units	Max	Time	Min	Time	SAE Class
G's	1.2	3.7	-9.2	1.8	1000

A.T.D. Serial No.: 034
 Test I.D.: HD01C





Calibration Data Sheet

Hybrid III 50th Percentile Male

Thorax Impact Test


ATD Serial No.: 034

Test I.D.: CH01C

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	6.58 to 6.82	6.74	Pass
Peak Probe Force	Newtons	5159 to 5893	5324	Pass
Peak Sternum Displacement	CM	6.35 to 7.26	7.13	Pass
Internal Hysteresis	%	69 to 85	75.9	Pass
Overall Test Results				Pass

Laboratory Technician

February 17, 2003
Test Date

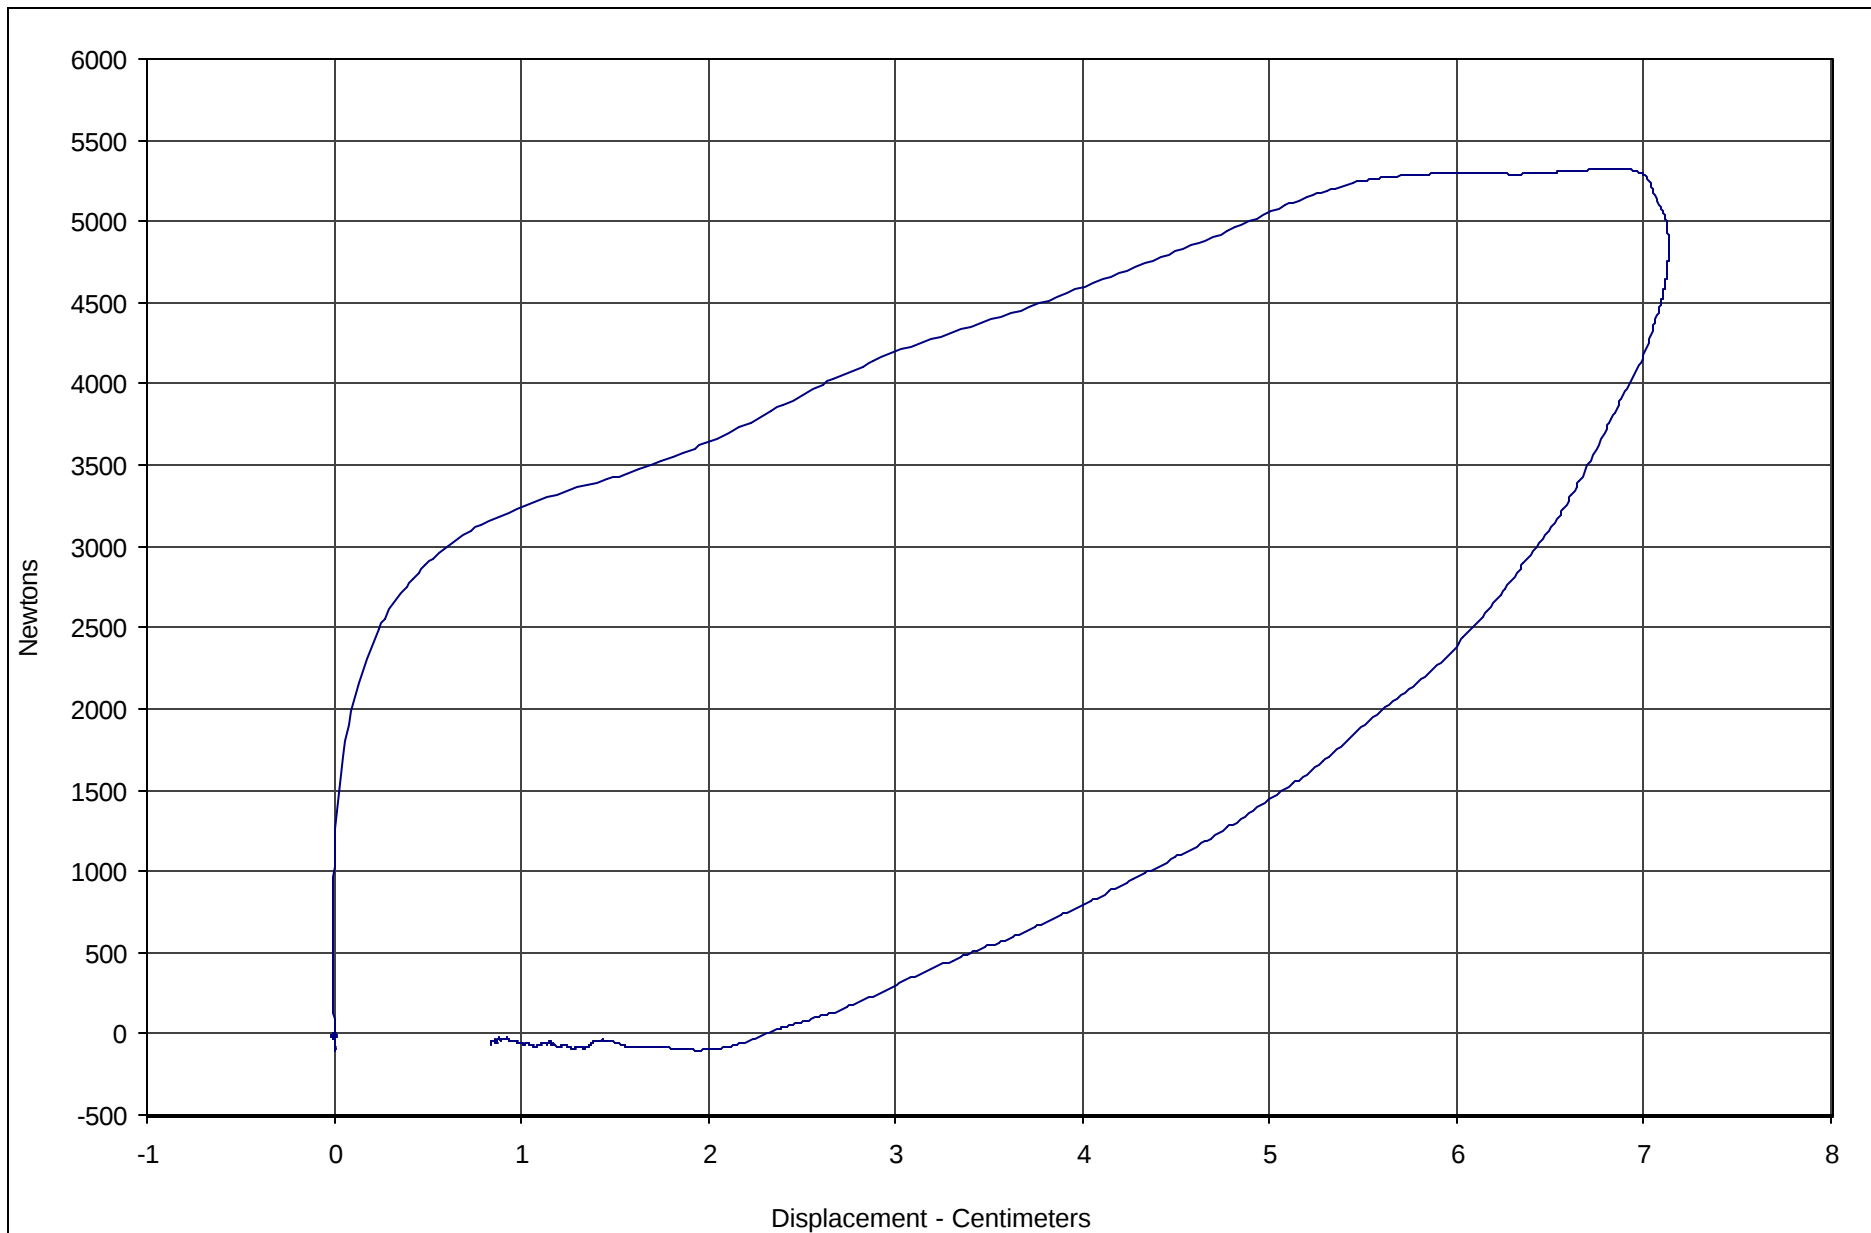

Curve Description	CURNO	Type	Hysteresis	Peak Chest Displ.	Peak Probe Force	SAE Class
Probe Force vs. Chest Displacement	001	FIL	75.9	7.13	5324.0	180



Test Program: Hybrid III 50th Percentile Male Thorax Impact

A.T.D. Serial No.: 034

Test Date: 2/17/03

Test I.D.: CH01C



Calibration Data Sheet

Hybrid III 50th Percentile Male

Neck Flexion Test

ATD Serial No.: 034


Test I.D.: NF02A

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Velocity		m/s	6.89 to 7.13	6.92	Pass
Pendulum Deceleration	10 Msec.	G's	22.5 to 27.5	23.3	Pass
	20 Msec.	G's	17.6 to 22.6	20.6	Pass
	30 Msec.	G's	12.5 to 18.5	18.1	Pass
Peak Pendulum Decel. after 30 Msec.		G's	≤ 29.0	18.1	Pass
Deceleration Decay, Time to Cross 5 G's		Msec.	34.0 to 42.0	37.1	Pass
Maximum "D" Plane Rotation	Maximum	Degrees	64.0 to 78.0	66.9	Pass
	Time	Msec.	57.0 to 64.0	60.8	Pass
"D" Plane Rotation Decay, Time To Zero Crossing		Msec.	113.0 to 128.0	113.1	Pass
Moment About Occipital Condyle	Maximum	Nm	84.1 to 108.5	89.0	Pass
	Time	Msec.	47.0 to 58.0	49.0	Pass
Positive Moment Decay, Time To Zero Crossing		Msec.	97.0 to 107.0	97.7	Pass
Overall Test Results					Pass

Laboratory Technician


February 14, 2003

Test Date

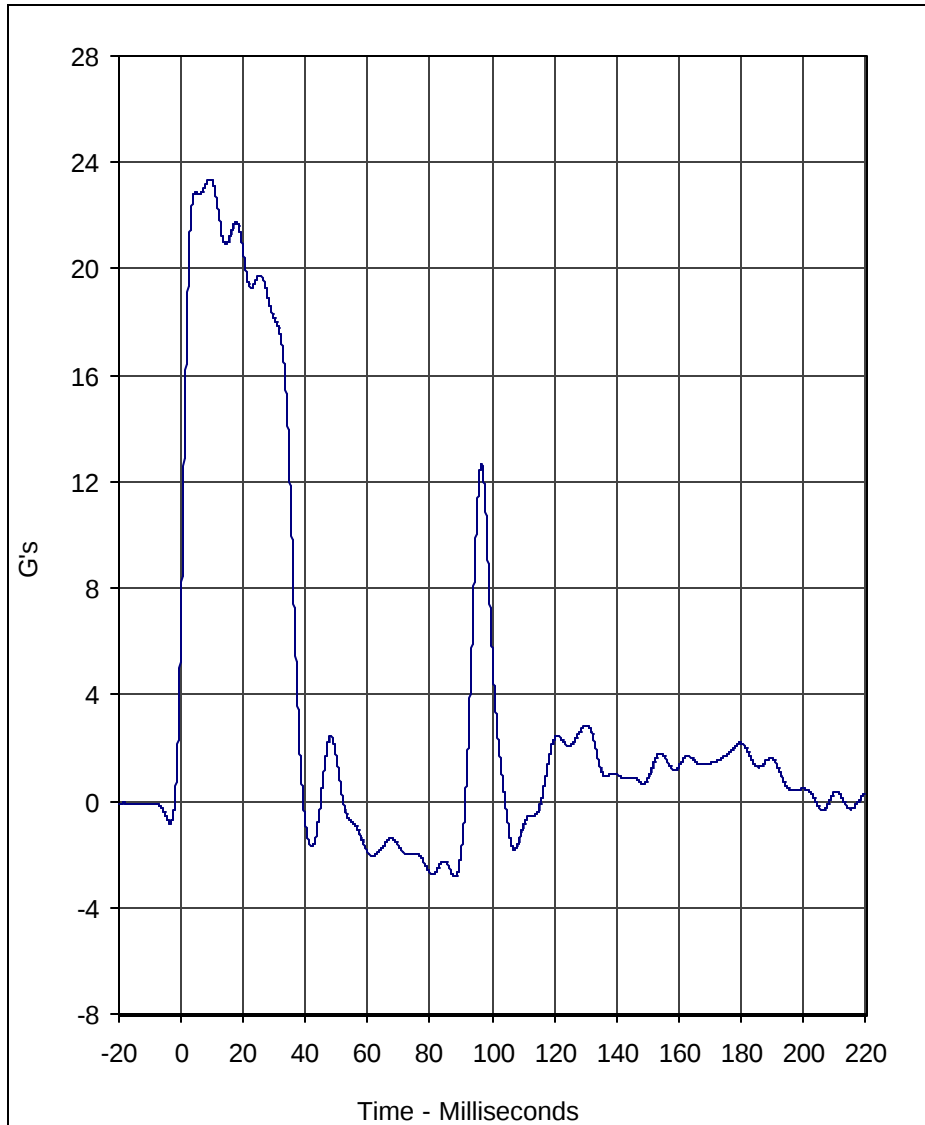

Curve Description				CURNO	Type
Pendulum Deceleration				001	FIL
Units	Max	Time	Min	Time	SAE Class
G's	23.4	9.4	-2.8	88.1	60


Test Program: Hybrid III 50th Percentile Male Neck Flexion Test
 Test Date: 2/14/03

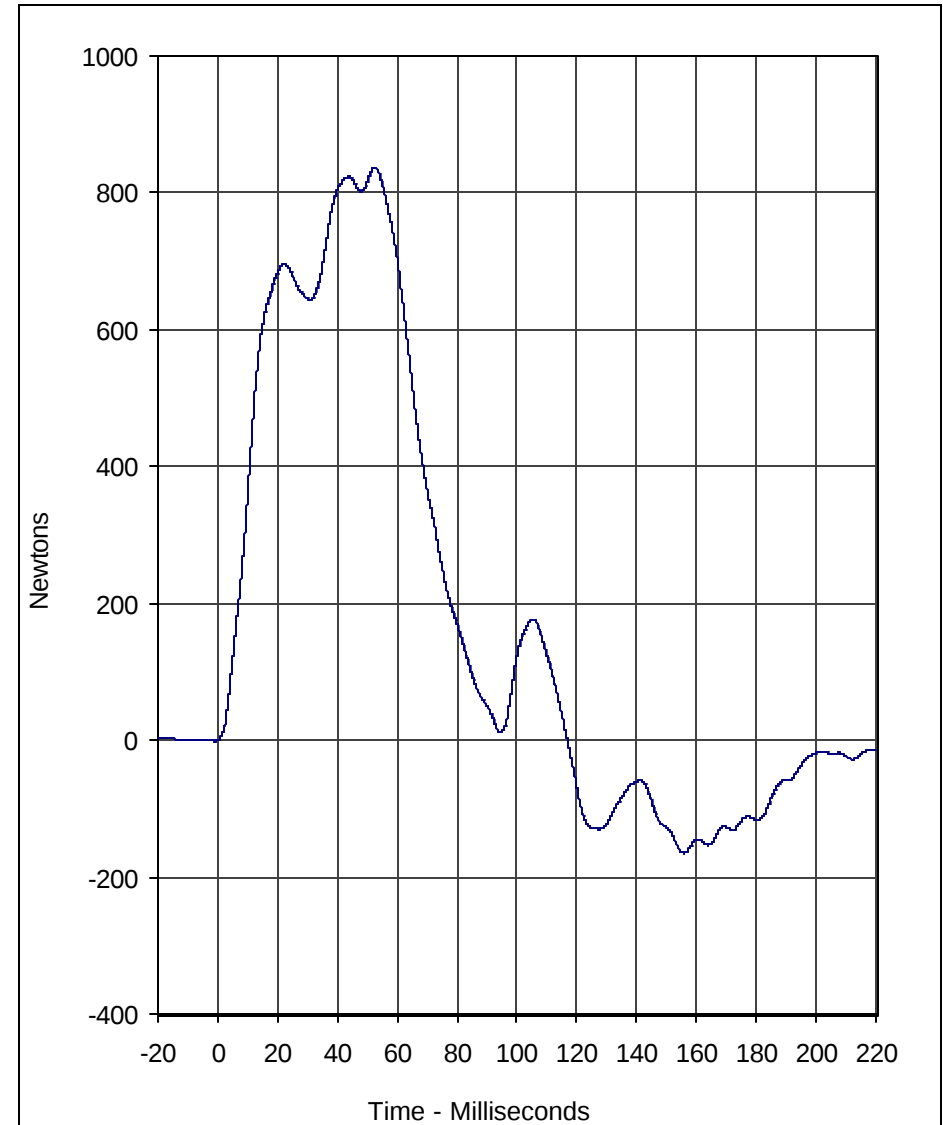

Curve Description				CURNO	Type
Neck Force X				002	FIL
Units	Max	Time	Min	Time	SAE Class
Newtons	837.5	52.4	-164.9	155.8	60

A.T.D. Serial No.: 034
 Test I.D.: NF02A




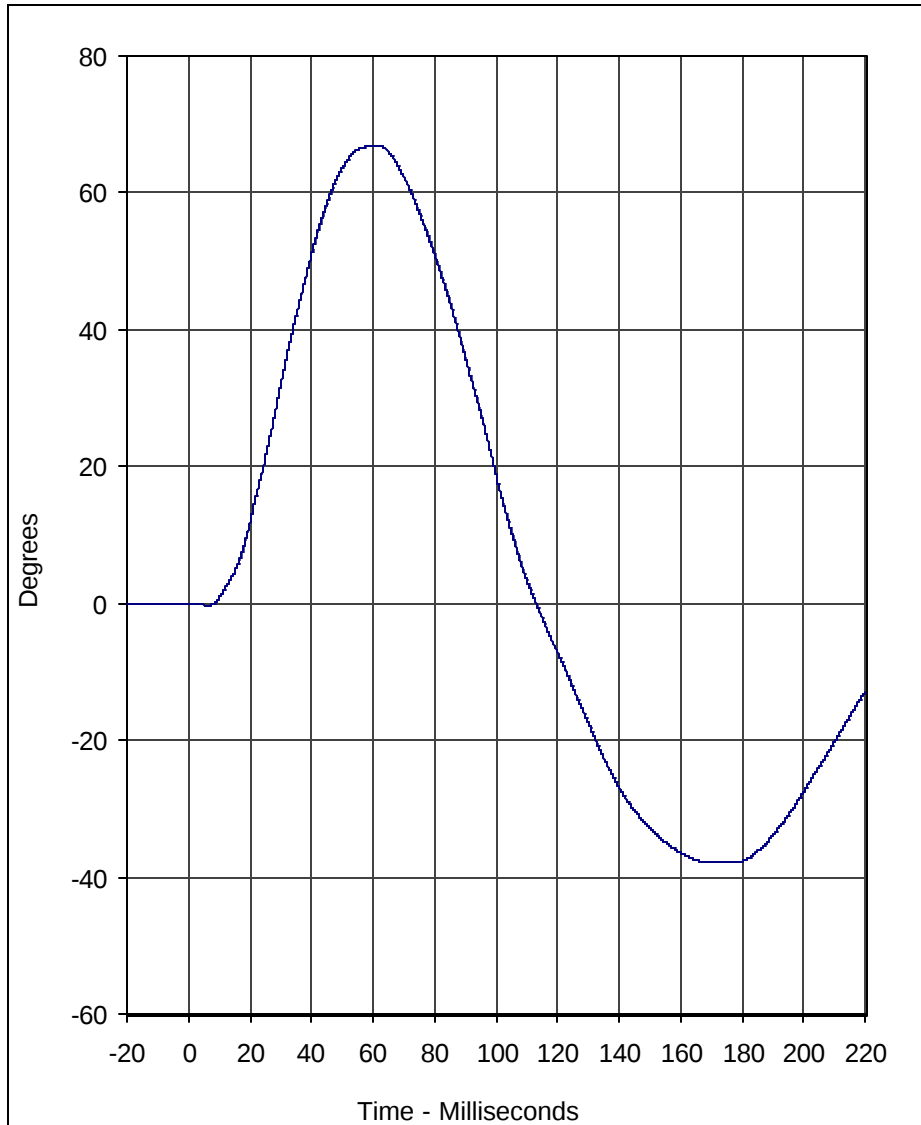

Curve Description				CURNO	Type
"D" Plane Rotation				003	FIL

Units	Max	Time	Min	Time	SAE Class
Degrees	66.9	60.8	-37.9	170.0	60

Test Program: Hybrid III 50th Percentile Male Neck Flexion Test
 Test Date: 2/14/03

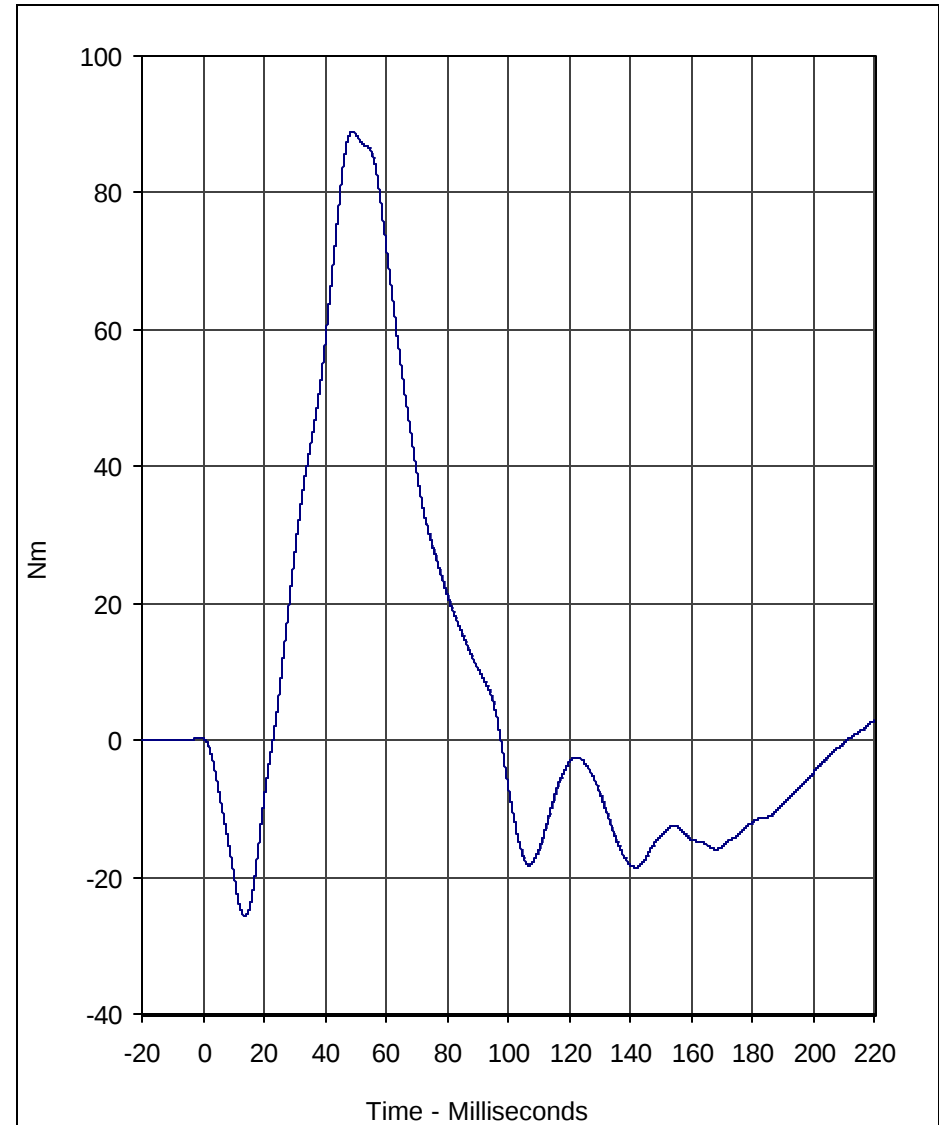

Curve Description				CURNO	Type
Moment About Occipital Condyle				004	FIL

Units	Max	Time	Min	Time	SAE Class
Nm	89.0	49.0	-25.8	13.8	60

A.T.D. Serial No.: 034
 Test I.D.: NF02A





Calibration Data Sheet

Hybrid III 50th Percentile Male

Neck Extension Test


ATD Serial No.: 034

Test I.D.: NE02A

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Velocity		m/s	5.94 to 6.19	6.13	Pass
Pendulum Deceleration	10 Msec.	G's	17.2 to 21.2	18.8	Pass
	20 Msec.	G's	14.0 to 19.0	17.3	Pass
	30 Msec.	G's	11.0 to 16.0	15.9	Pass
Peak Pendulum Decel. after 30 Msec.		G's	≤ 22.0	16.0	Pass
Deceleration Decay, Time to Cross 5 G's		Msec.	38.0 to 46.0	38.3	Pass
Maximum "D" Plane Rotation	Maximum	Degrees	81.0 to 106.0	86.8	Pass
	Time	Msec.	72.0 to 82.0	80.6	Pass
"D" Plane Rotation Decay, Time To Zero Crossing		Msec.	147.0 to 174.0	154.0	Pass
Moment About Occipital Condyle	Maximum	Nm	-52.9 to- 79.9	-61.6	Pass
	Time	Msec.	65.0 to 79.0	73.2	Pass
Positive Moment Decay, Time To Zero Crossing		Msec.	120.0 to 148.0	141.2	Pass
Overall Test Results					Pass

Laboratory Technician


February 14, 2003
Test Date

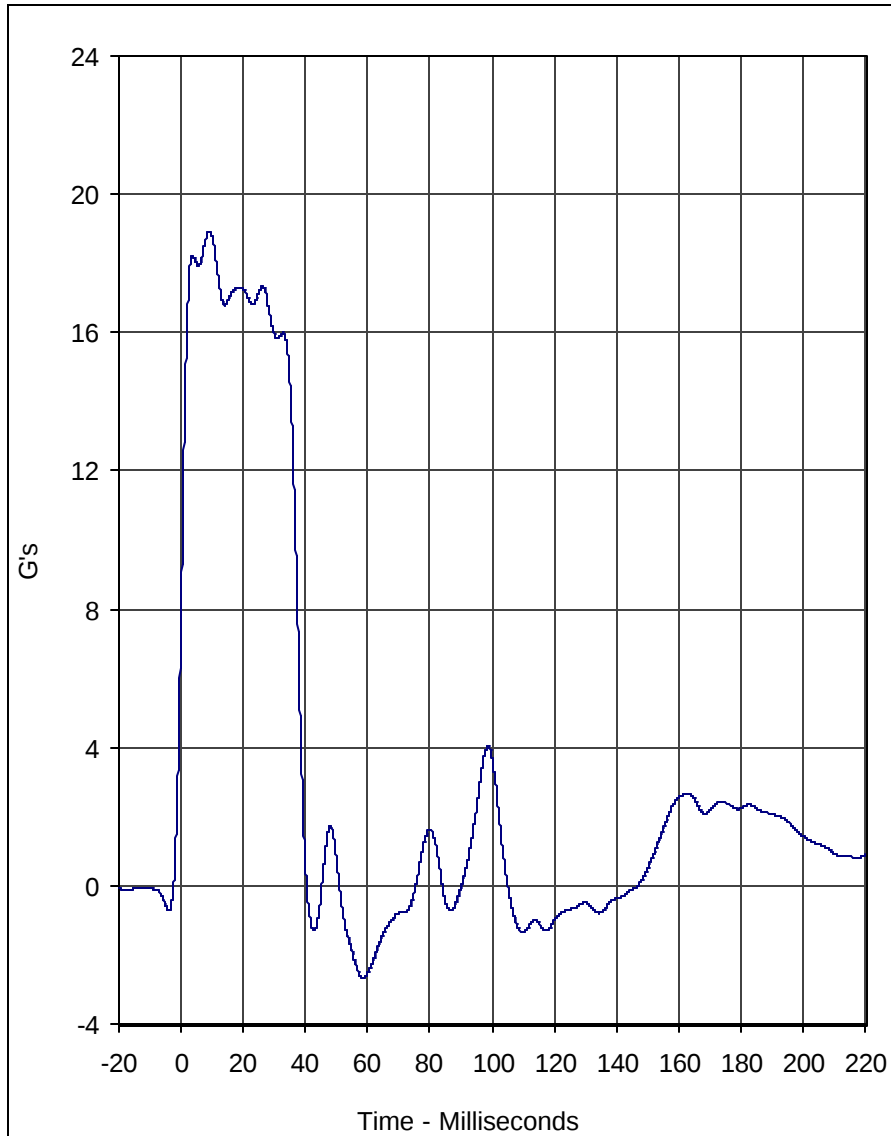

Curve Description				CURNO	Type
Pendulum Deceleration				001	FIL

Units	Max	Time	Min	Time	SAE Class
G's	18.9	9.1	-2.7	58.4	60

Test Program: Hybrid III 50th Percentile Male Neck Extension Test
 Test Date: 2/14/03

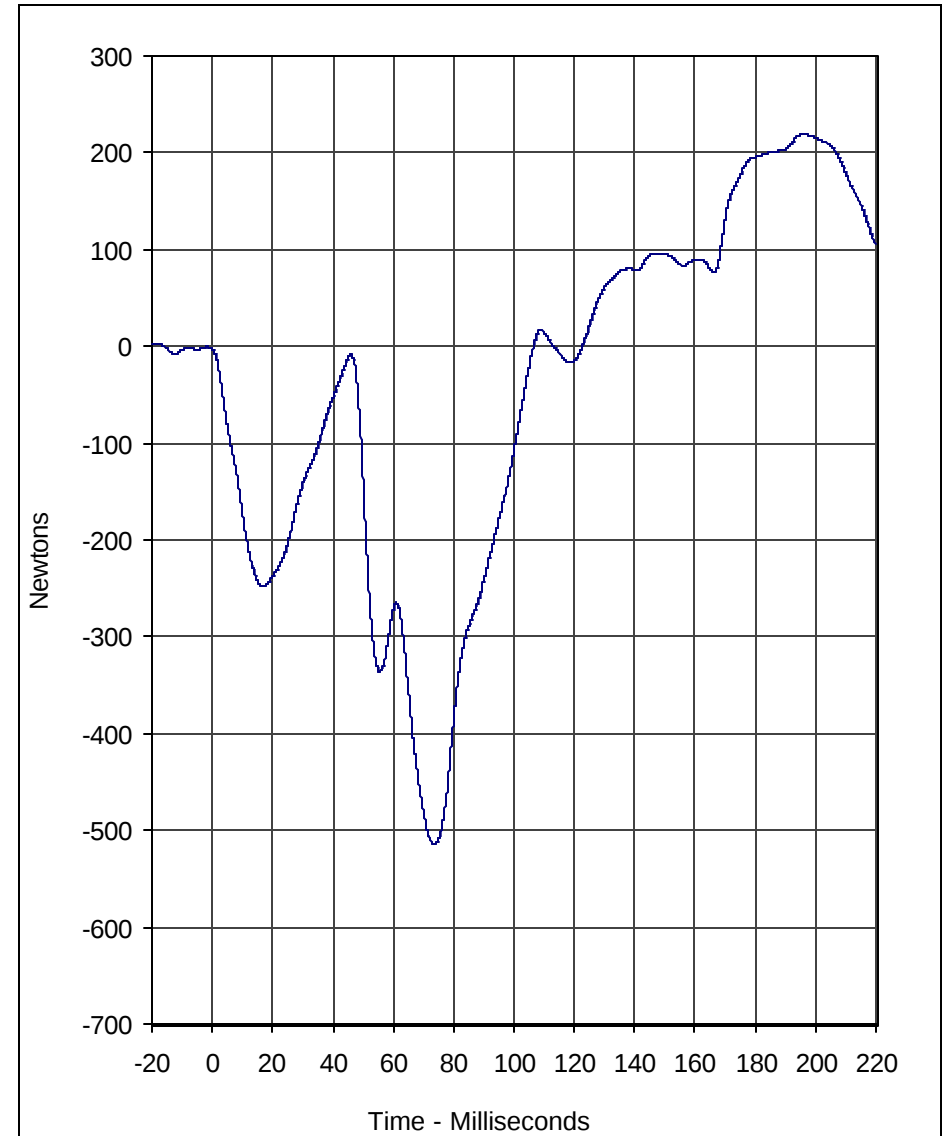


Curve Description				CURNO	Type
Neck Force X				002	FIL

Units	Max	Time	Min	Time	SAE Class
Newtons	218.8	195.9	-514.2	73.5	60


A.T.D. Serial No.: 034
 Test I.D.: NE02A



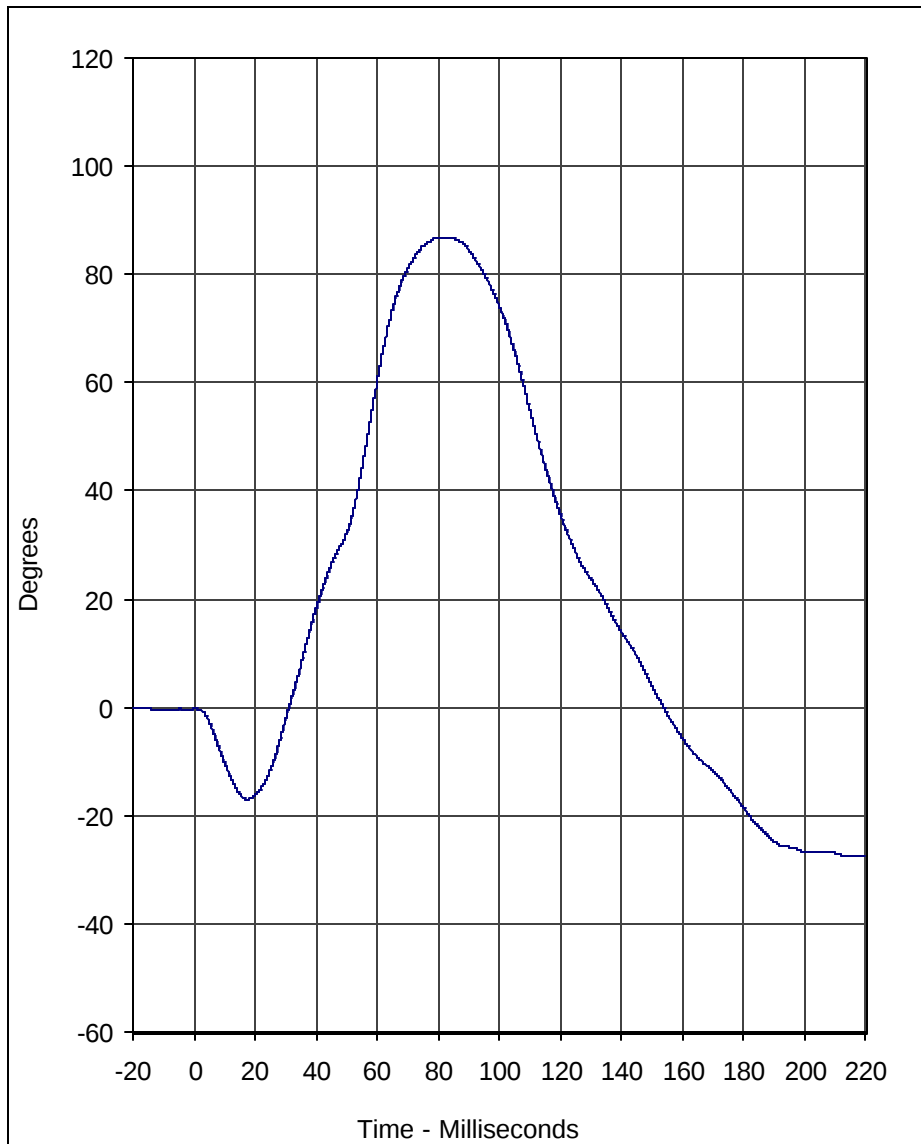

Curve Description				CURNO	Type
"D" Plane Rotation				003	FIL
Units	Max	Time	Min	Time	SAE Class
Degrees	86.8	80.6	-27.6	214.9	60

Test Program: Hybrid III 50th Percentile Male Neck Extension Test
 Test Date: 2/14/03

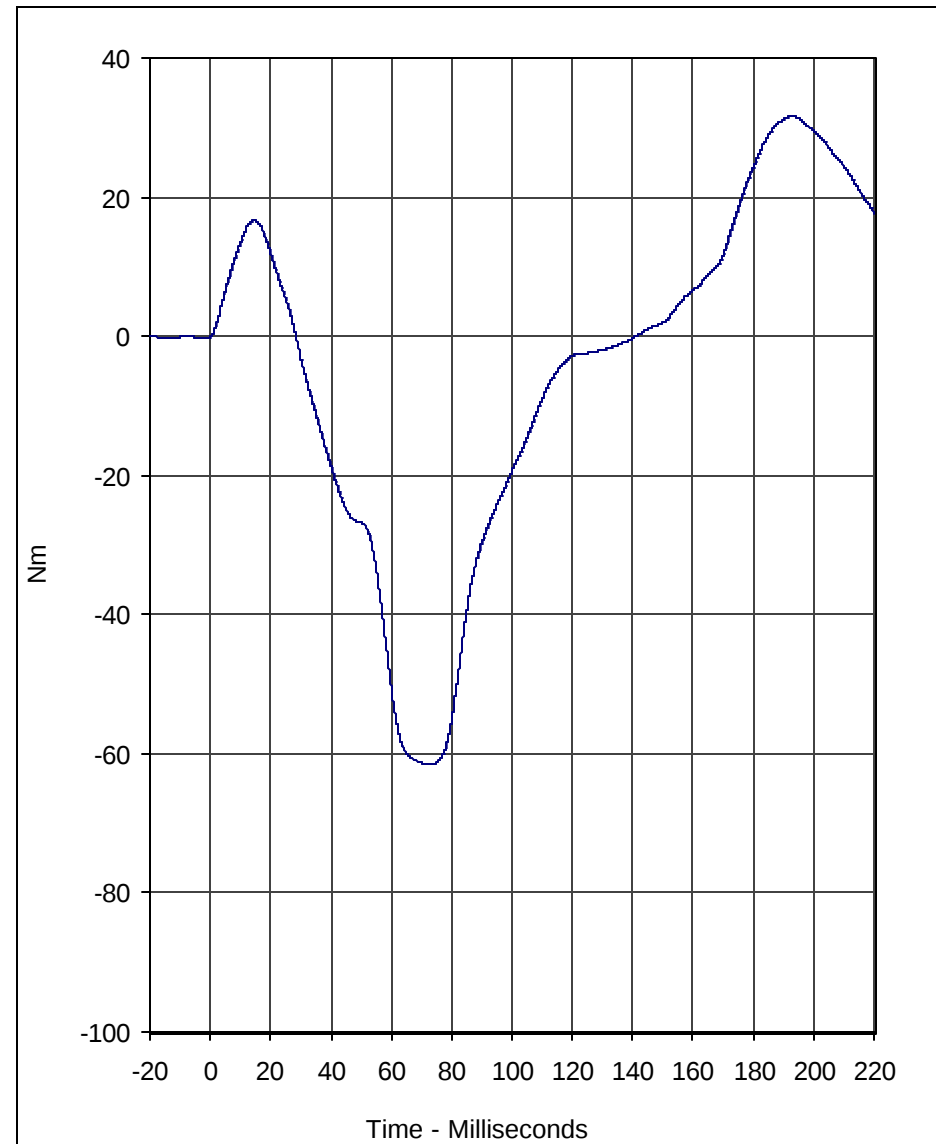

Curve Description				CURNO	Type
Moment About Occipital Condyle				004	FIL
Units	Max	Time	Min	Time	SAE Class
Nm	31.6	192.9	-61.6	73.2	60

A.T.D. Serial No.: 034
 Test I.D.: NE02A





Calibration Data Sheet

Hybrid III 50th Percentile Male

External Measurements

ATD Serial No.: 034

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
A - Total sitting height	mm	879 to 889	880	Pass
B - Shoulder pivot height	mm	505 to 521	510	Pass
C - "H" point height	mm	84 to 89	85	Pass
D - "H" point from seat back	mm	135 to 140	135	Pass
E - Shoulder pivot from back	mm	84 to 94	90	Pass
F - Thigh clearance	mm	140 to 155	150	Pass
G - Elbow back to wrist pivot	mm	290 to 305	295	Pass
H - Skull cap to back line	mm	41 to 46	45	Pass
I - Shoulder to elbow length	mm	330 to 345	340	Pass
J - Elbow rest height	mm	190 to 211	210	Pass
K - Buttock to knee length	mm	579 to 604	595	Pass
L - Popliteal length	mm	429 to 455	445	Pass
M - Knee pivot height	mm	485 to 500	500	Pass
N - Buttock popliteal length	mm	452 to 477	470	Pass
O - Chest depth	mm	213 to 229	220	Pass
P - Foot length	mm	251 to 267	260	Pass
V - Shoulder breadth	mm	422 to 437	430	Pass
W - Foot breadth	mm	91 to 107	95	Pass
Y - Chest circumference	mm	970 to 1001	990	Pass
Z - Waist circumference	mm	836 to 866	860	Pass
AA - Location for chest circumference	mm	429 to 434	430	Pass
BB - Location for waist circumference	mm	226 to 231	230	Pass
Overall Test Results				Pass

Laboratory Technician

February 17, 2003

Test Date



Calibration Data Sheet

Hybrid III 50th Percentile Male

Knee Impact Test

ATD Serial No.: 035

Location: Left Knee

Test I.D.: LK01D

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	18.9 to 25.6	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Pendulum Velocity at T=0	m/sec	2.07 to 2.13	2.10	Pass
Peak Probe Force	N	4715 to 5782	5335	Pass
Overall Test Results				Pass

ATD Serial No.: 035


Location: Right Knee

Test I.D.: RK01D

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	18.9 to 25.6	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Pendulum Velocity at T=0	m/sec	2.07 to 2.13	2.11	Pass
Peak Probe Force	N	4715 to 5782	5442	Pass
Overall Test Results				Pass


Laboratory Technician

February 14, 2003
Test Date

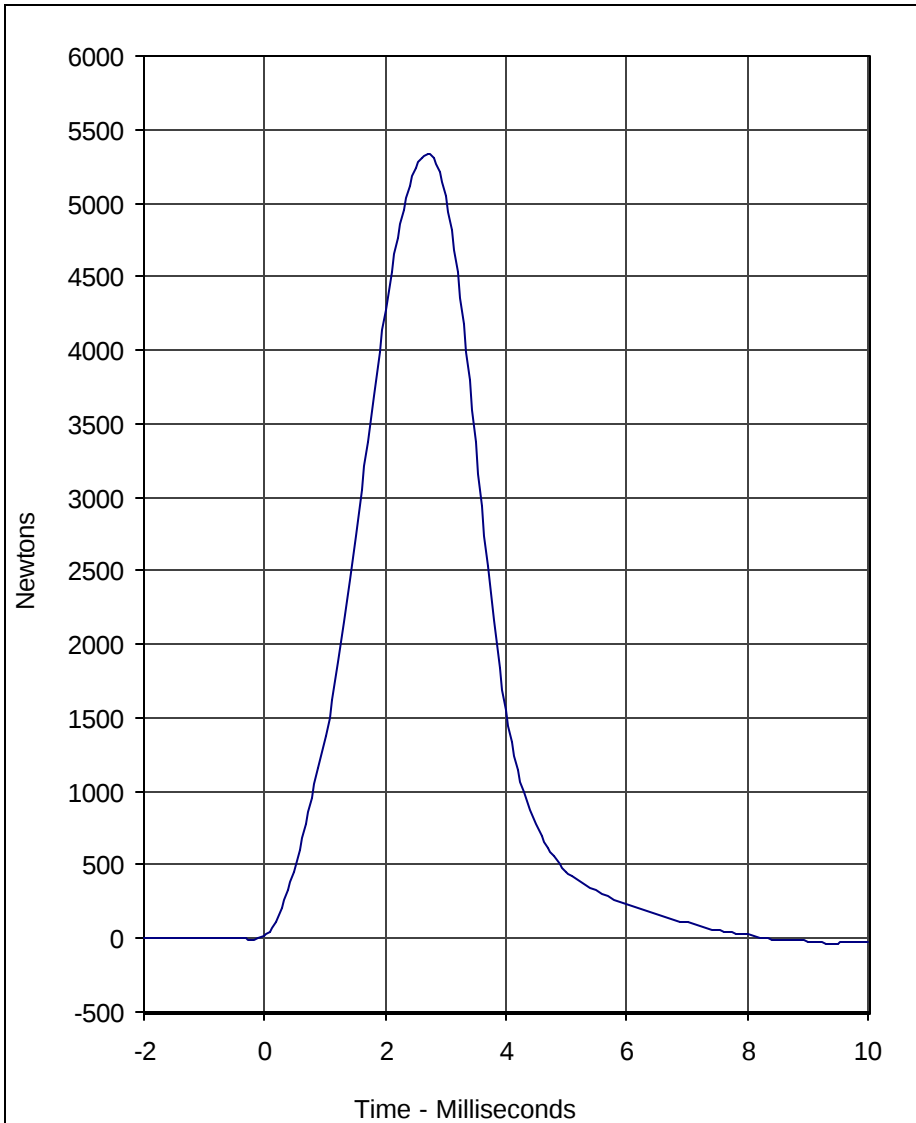

Curve Description		Location	Test I.D.	CURNO	Type
Probe Force		Left Knee	LK01D	001	FIL
Units	Max	Time	Min	Time	SAE Class
Newtons	5335.5	2.7	-34.0	9.4	600

Test Program: Hybrid III 50th Percentile Male Knee Impact Test
 Test Date: 2/14/03

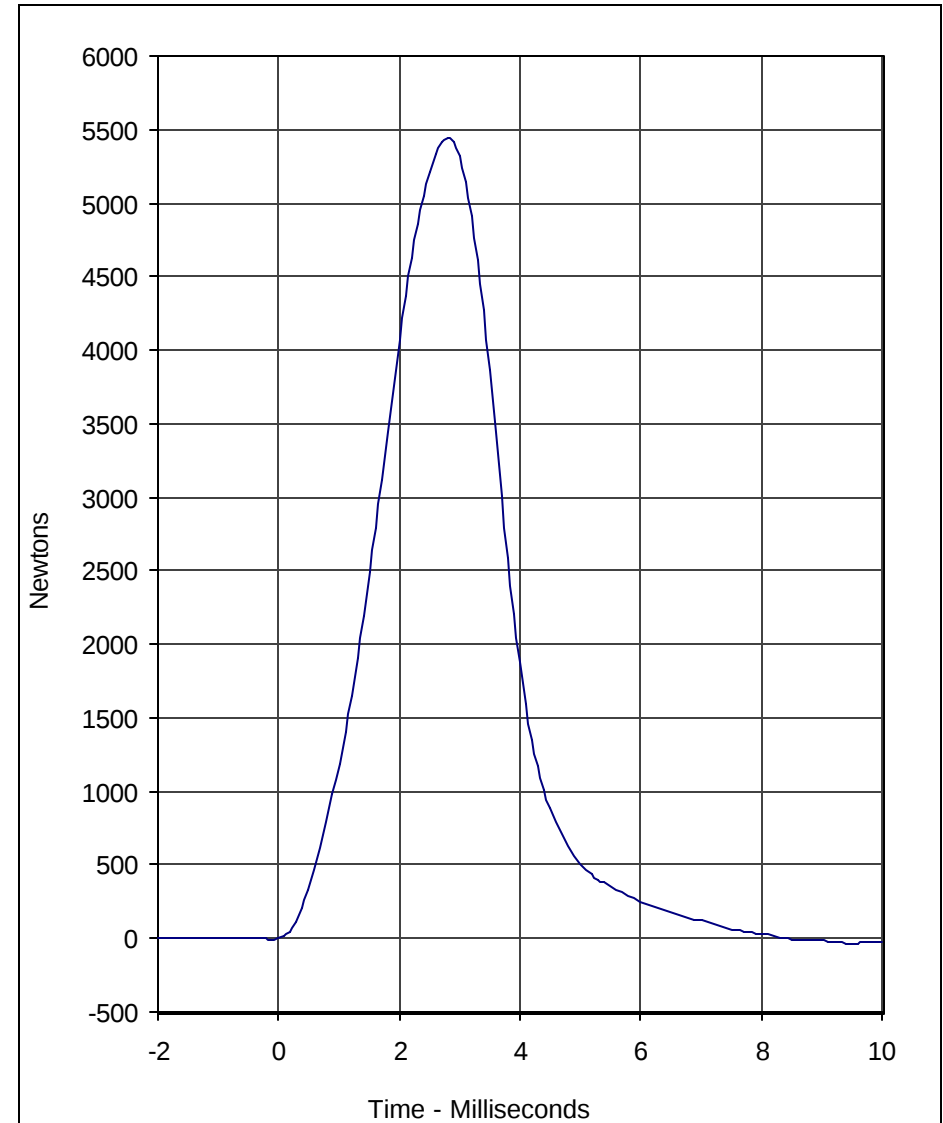

Curve Description		Location	Test I.D.	CURNO	Type
Probe Force		Right Knee	RK01D	002	FIL
Units	Max	Time	Min	Time	SAE Class
Newtons	5442.2	2.8	-34.7	9.5	600

A.T.D. Serial No.: 035





Calibration Data Sheet

Hybrid III 50th Percentile Male

Head Drop Test

ATD Serial No.: 035


Test I.D.: HD01D

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	18.9 to 25.6	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Peak Resultant Acceleration	G's	225.0 to 275.0	228.7	Pass
Peak Lateral Acceleration	G's	≤15.0	3.5	Pass
Is Acceleration Unimodal?	Yes/No	Yes	Yes	Pass
Overall Test Results				Pass

Laboratory Technician


February 14, 2003

Test Date

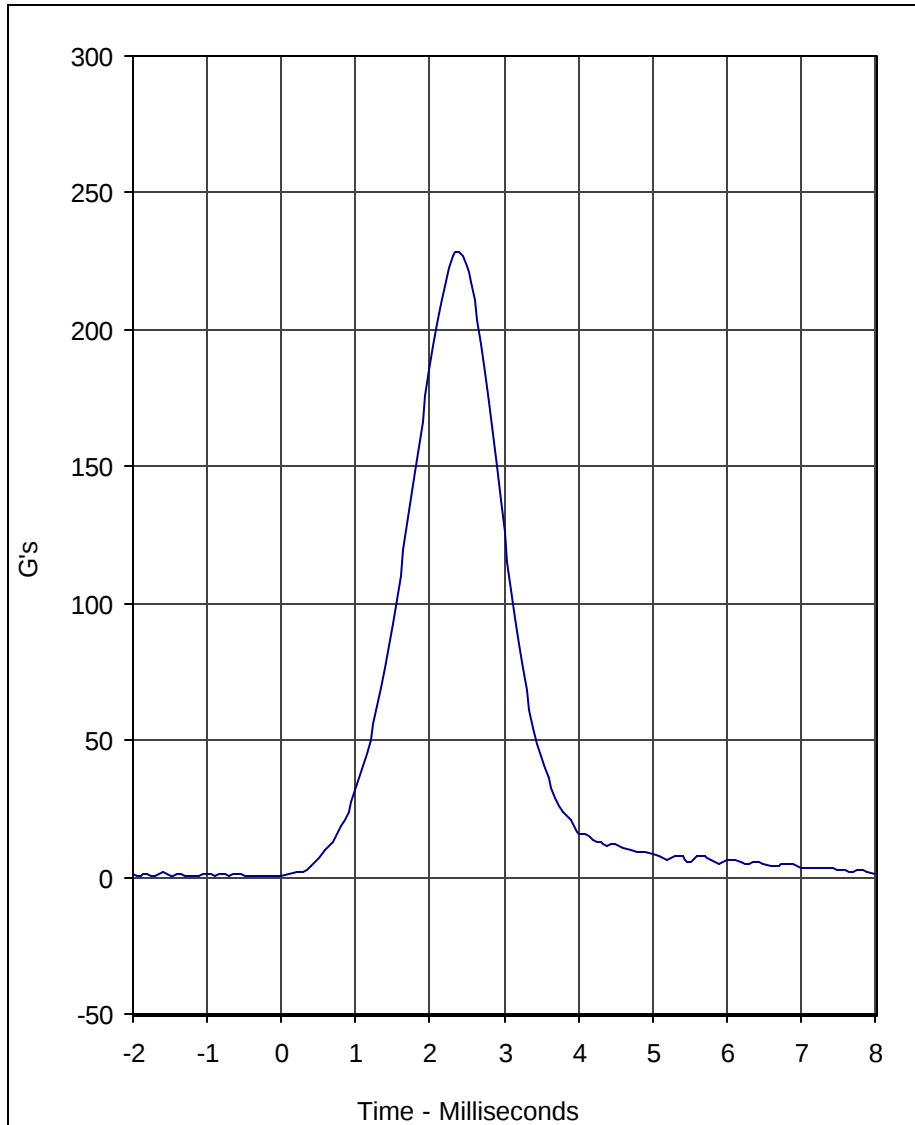

Curve Description				CURNO	Type
Head Resultant				001	RES
Units	Max	Time	Min	Time	SAE Class
G's	228.7	2.4	0.3	-0.5	1000

Test Program: Hybrid III 50th Percentile Male Head Drop Test
 Test Date: 2/14/03

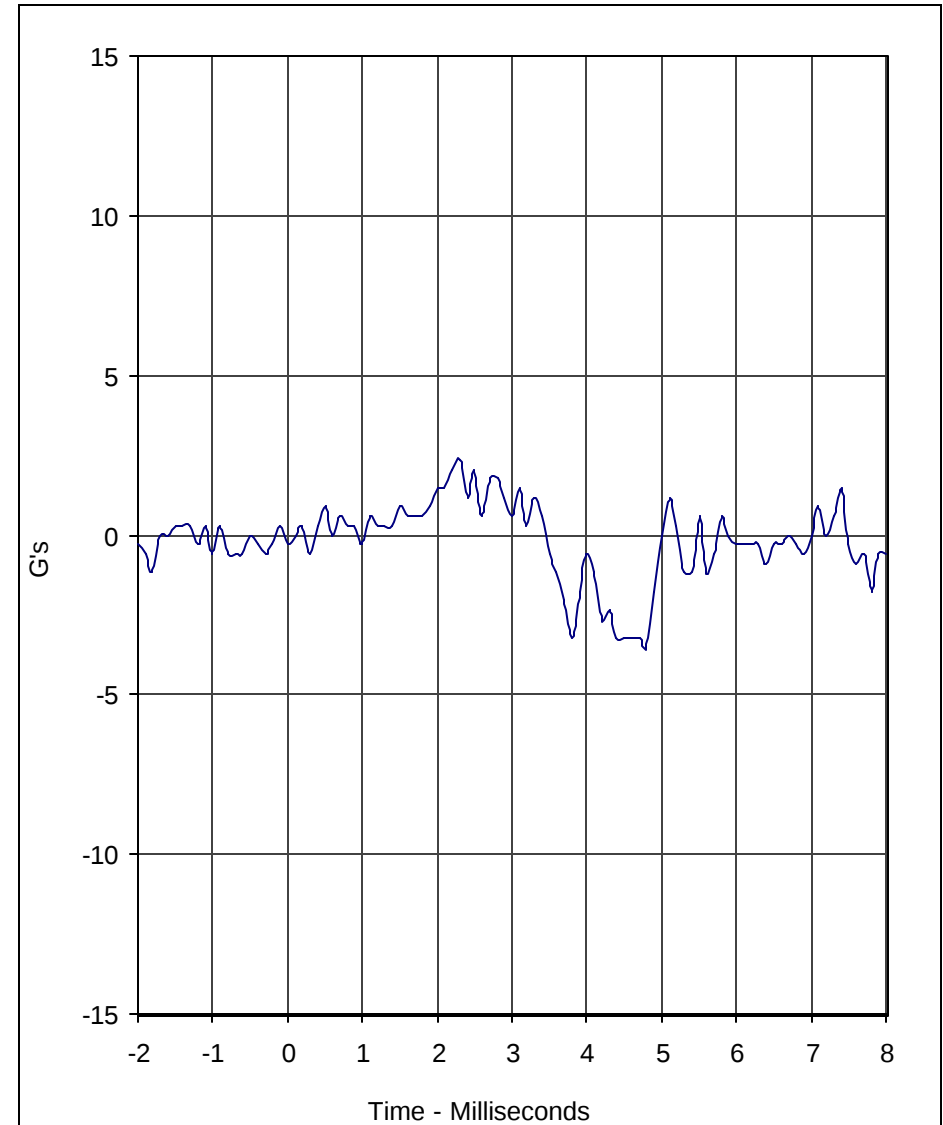

Curve Description				CURNO	Type
Head Y				002	FIL
Units	Max	Time	Min	Time	SAE Class
G's	2.4	2.3	-3.5	4.8	1000

A.T.D. Serial No.: 035
 Test I.D.: HD01D





Calibration Data Sheet

Hybrid III 50th Percentile Male

Thorax Impact Test

ATD Serial No.: 035

Test I.D.: CH01D


Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	6.58 to 6.82	6.61	Pass
Peak Probe Force	Newtons	5159 to 5893	5466	Pass
Peak Sternum Displacement	CM	6.35 to 7.26	6.72	Pass
Internal Hysteresis	%	69 to 85	75.8	Pass
Overall Test Results				Pass

E-18

TR-P23001-11-NC

Laboratory Technician

February 17, 2003
Test Date

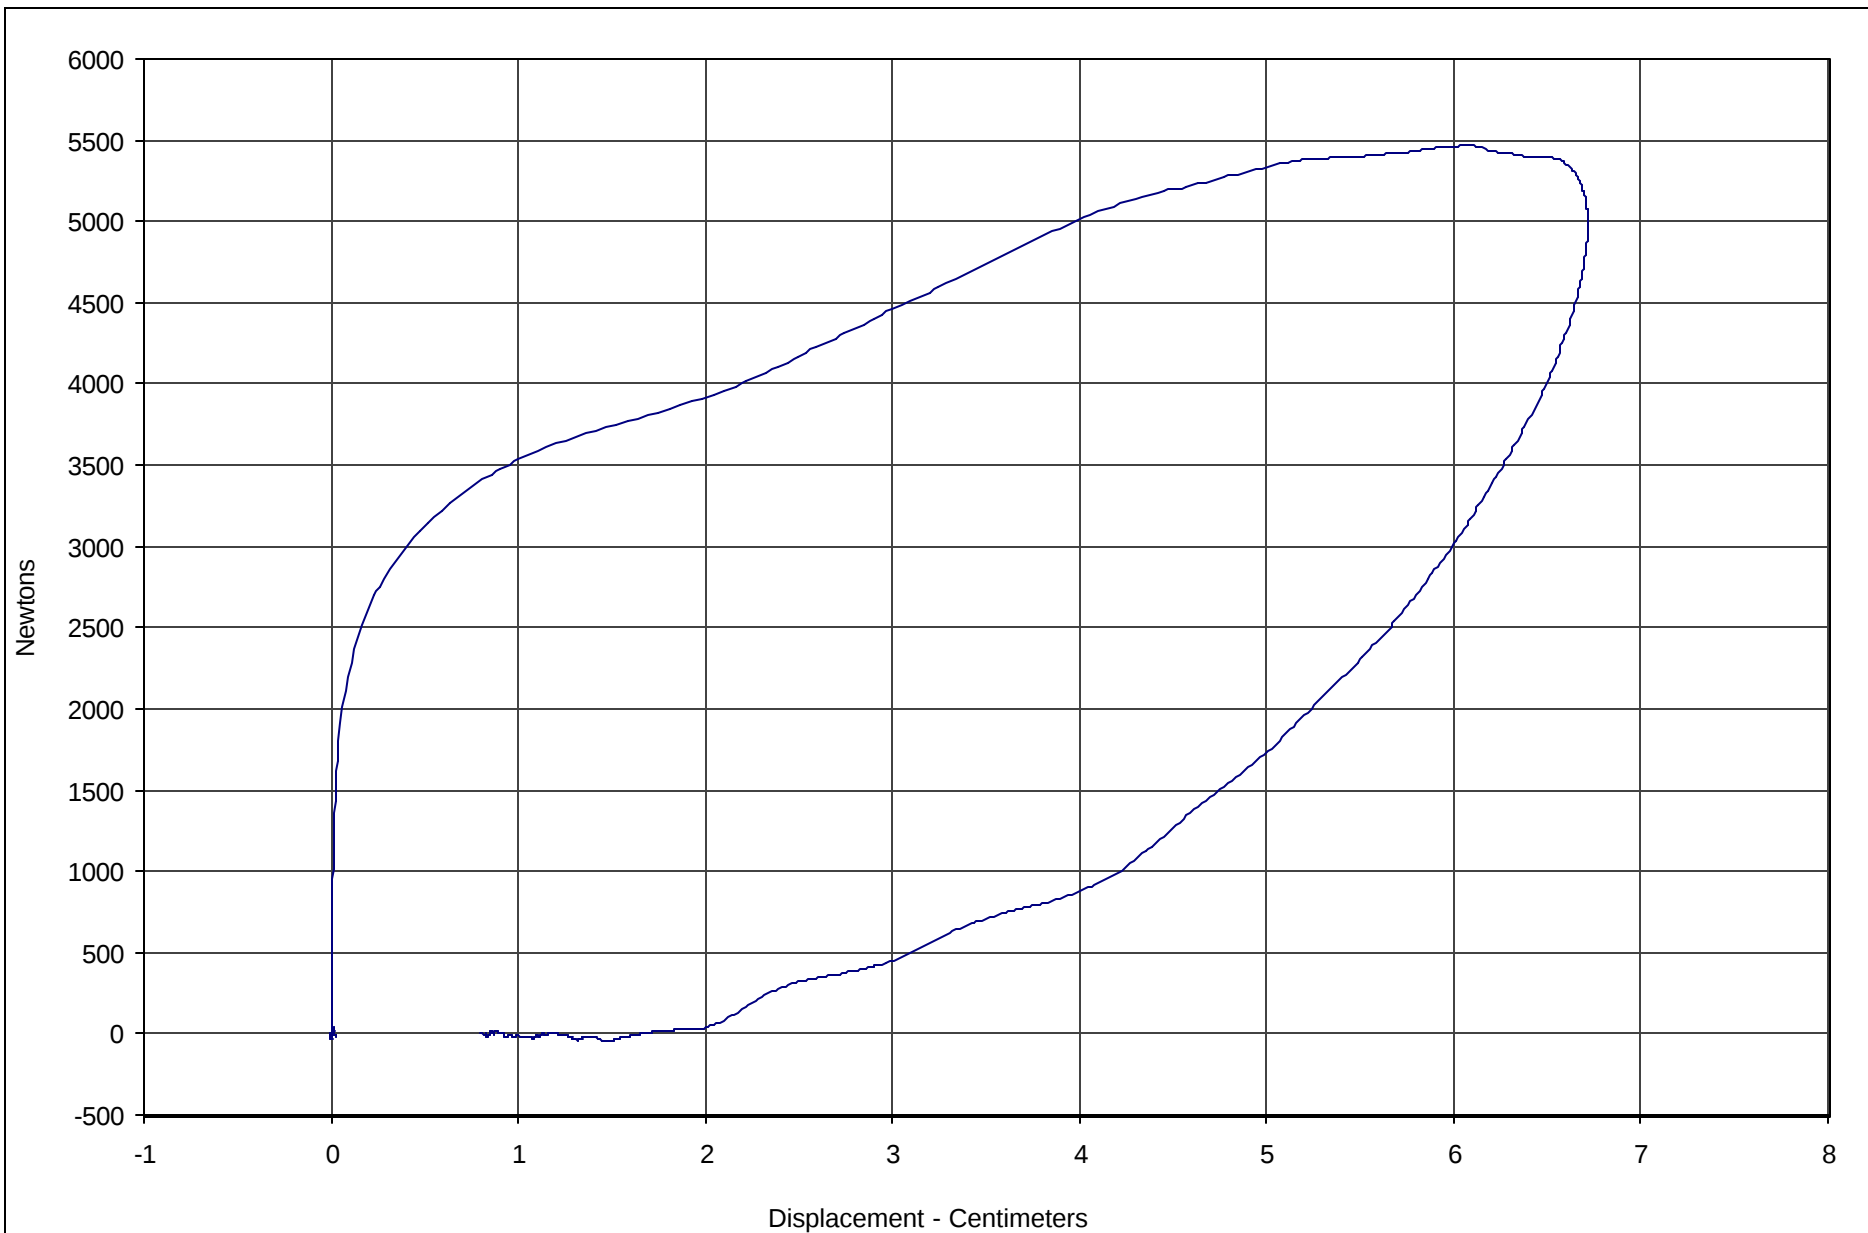

Curve Description	CURNO	Type	Hysteresis	Peak Chest Displ.	Peak Probe Force	SAE Class
Probe Force vs. Chest Displacement	001	FIL	75.8	6.72	5465.8	180



Test Program: Hybrid III 50th Percentile Male Thorax Impact

A.T.D. Serial No.: 035

Test Date: 2/17/03

Test I.D.: CH01D



Calibration Data Sheet

Hybrid III 50th Percentile Male

Neck Flexion Test

ATD Serial No.: 035


Test I.D.: NF02B

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Velocity		m/s	6.89 to 7.13	7.04	Pass
Pendulum Deceleration	10 Msec.	G's	22.5 to 27.5	23.1	Pass
	20 Msec.	G's	17.6 to 22.6	19.6	Pass
	30 Msec.	G's	12.5 to 18.5	18.2	Pass
Peak Pendulum Decel. after 30 Msec.		G's	≤ 29.0	18.2	Pass
Deceleration Decay, Time to Cross 5 G's		Msec.	34.0 to 42.0	37.3	Pass
Maximum "D" Plane Rotation	Maximum	Degrees	64.0 to 78.0	70.0	Pass
	Time	Msec.	57.0 to 64.0	63.0	Pass
"D" Plane Rotation Decay, Time To Zero Crossing		Msec.	113.0 to 128.0	118.7	Pass
Moment About Occipital Condyle	Maximum	Nm	84.1 to 108.5	85.8	Pass
	Time	Msec.	47.0 to 58.0	54.8	Pass
Positive Moment Decay, Time To Zero Crossing		Msec.	97.0 to 107.0	100.5	Pass
Overall Test Results					Pass

Laboratory Technician


February 14, 2003

Test Date

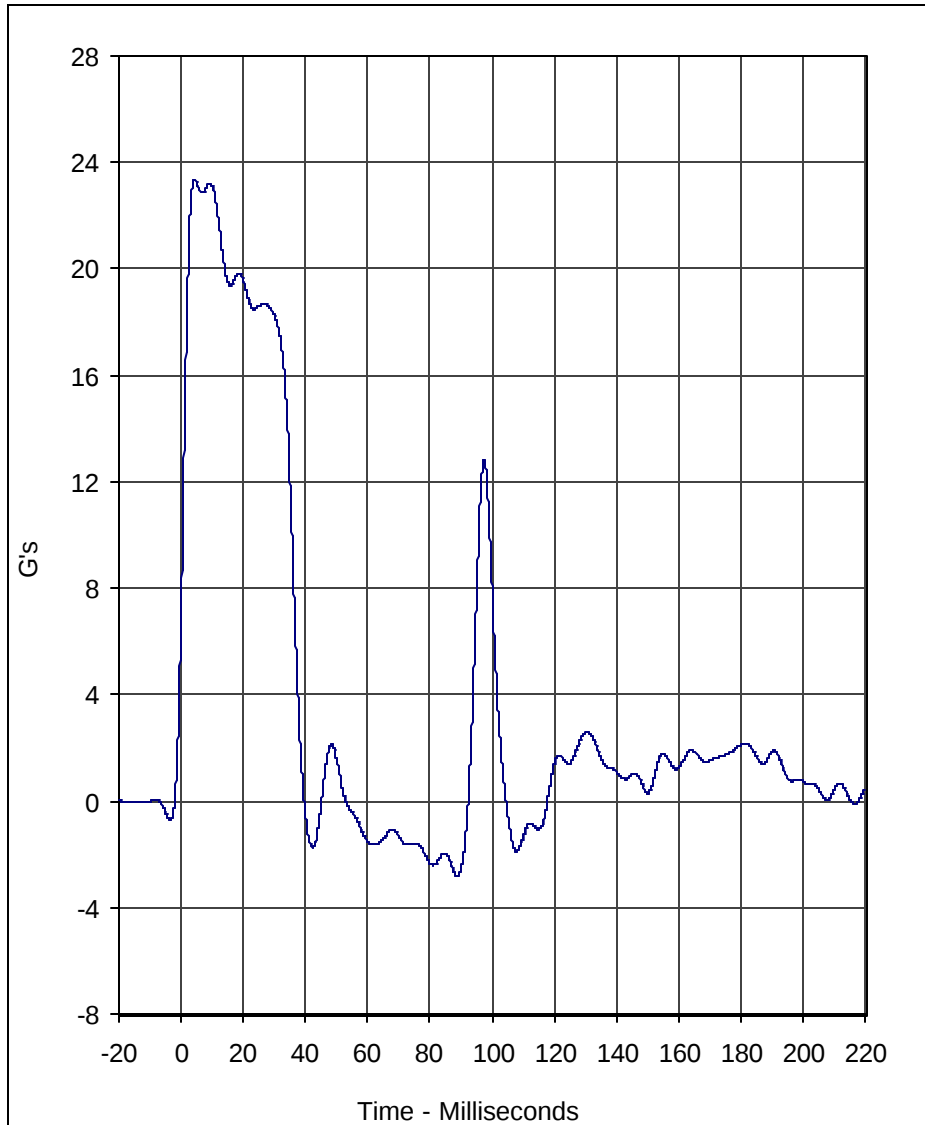

Curve Description				CURNO	Type
Pendulum Deceleration				001	FIL
Units	Max	Time	Min	Time	SAE Class
G's	23.4	4.3	-2.8	88.8	60


Test Program: Hybrid III 50th Percentile Male Neck Flexion Test
 Test Date: 2/14/03

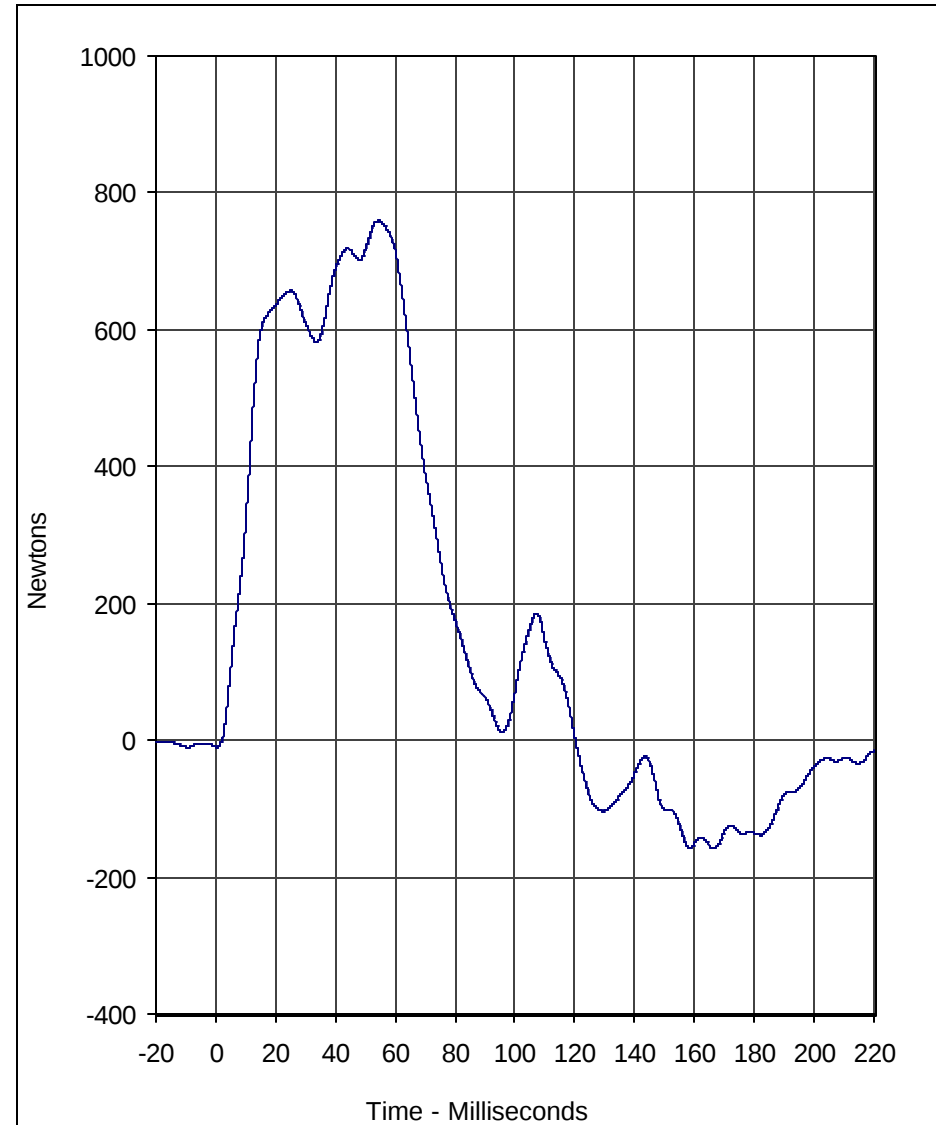

Curve Description				CURNO	Type
Neck Force X				002	FIL
Units	Max	Time	Min	Time	SAE Class
Newtons	759.0	54.4	-158.5	166.5	60


A.T.D. Serial No.: 035
 Test I.D.: NF02B



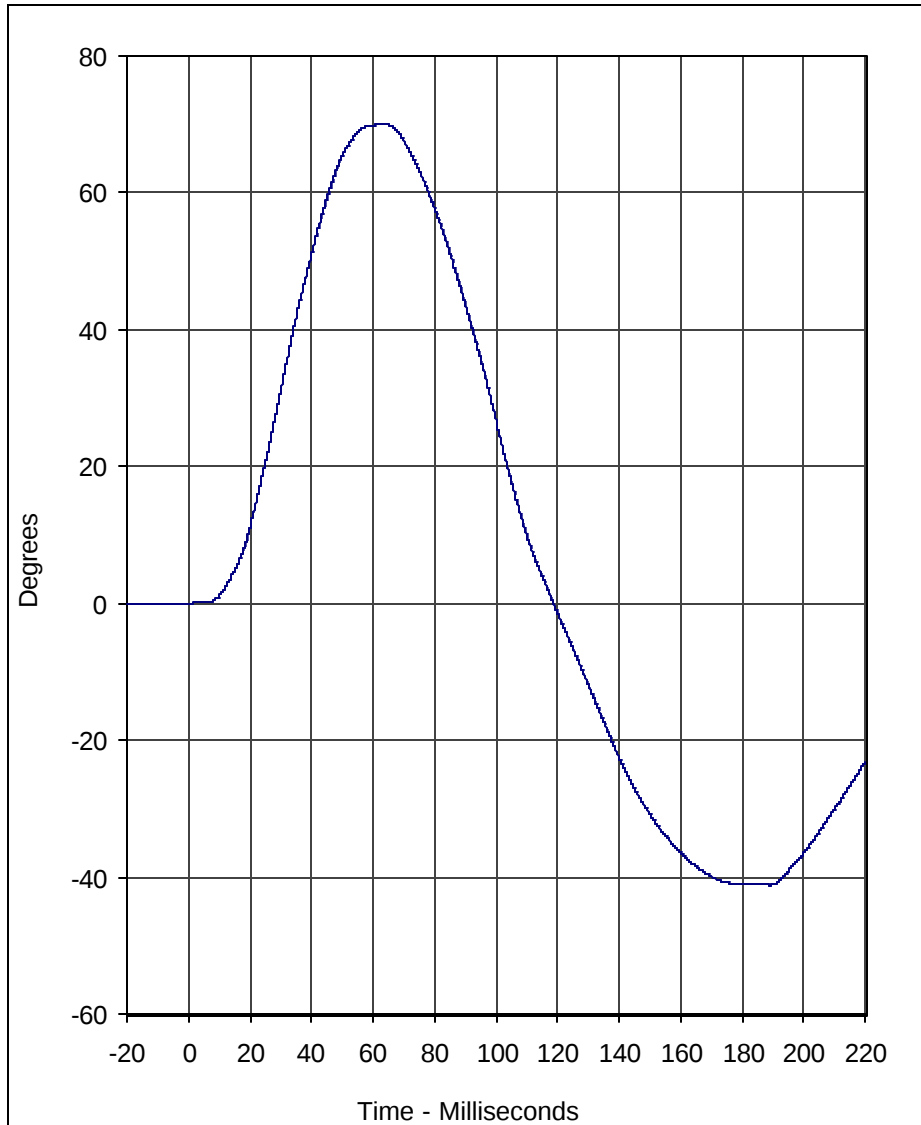

Curve Description				CURNO	Type
"D" Plane Rotation				003	FIL
Units	Max	Time	Min	Time	SAE Class
Degrees	70.0	63.0	-41.2	189.3	60

Test Program: Hybrid III 50th Percentile Male Neck Flexion Test
 Test Date: 2/14/03

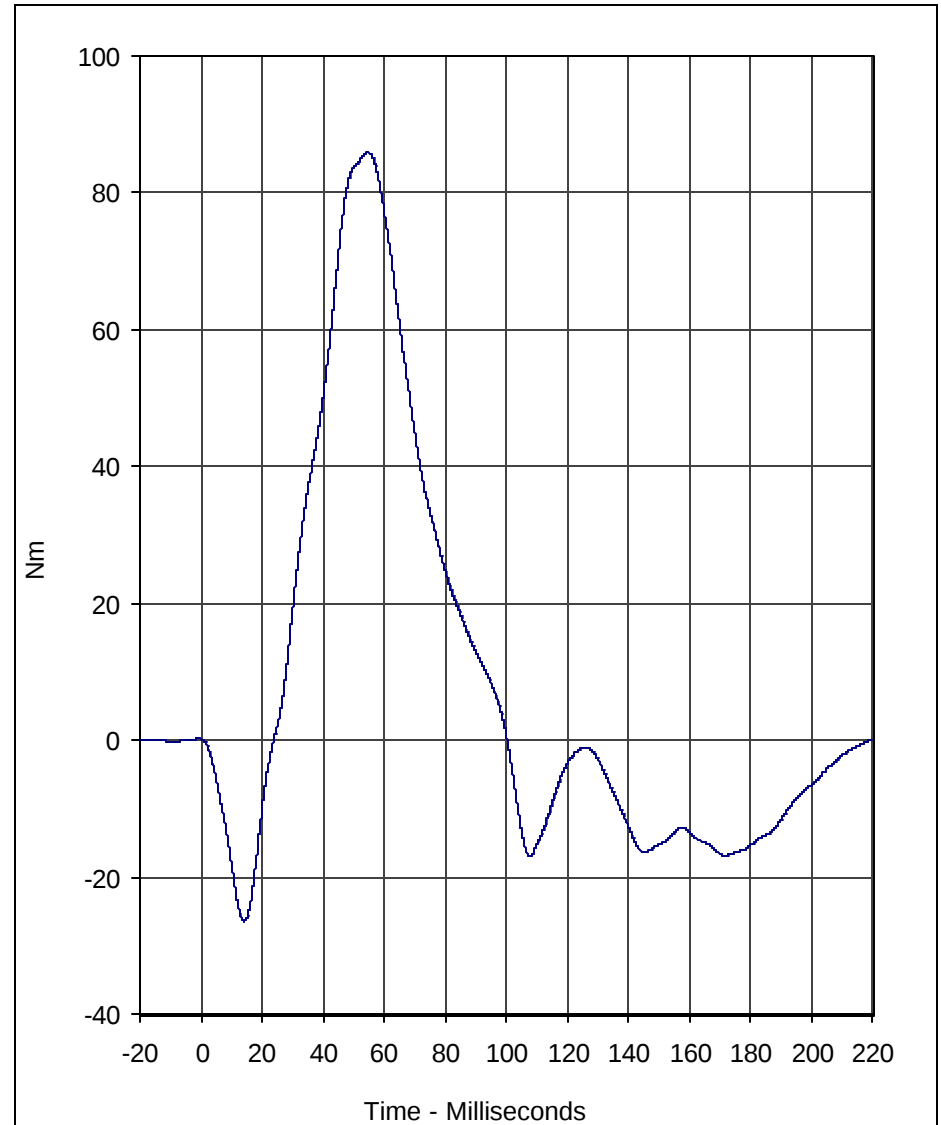

Curve Description				CURNO	Type
Moment About Occipital Condyle				004	FIL
Units	Max	Time	Min	Time	SAE Class
Nm	85.8	54.8	-26.5	14.1	60

A.T.D. Serial No.: 035
 Test I.D.: NF02B





Calibration Data Sheet

Hybrid III 50th Percentile Male

Neck Extension Test

ATD Serial No.: 035

Test I.D.: NE02A


Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Velocity		m/s	5.94 to 6.19	6.13	Pass
Pendulum Deceleration	10 Msec.	G's	17.2 to 21.2	18.4	Pass
	20 Msec.	G's	14.0 to 19.0	16.5	Pass
	30 Msec.	G's	11.0 to 16.0	15.1	Pass
Peak Pendulum Decel. after 30 Msec.		G's	≤ 22.0	15.1	Pass
Deceleration Decay, Time to Cross 5 G's		Msec.	38.0 to 46.0	38.6	Pass
Maximum "D" Plane Rotation	Maximum	Degrees	81.0 to 106.0	95.6	Pass
	Time	Msec.	72.0 to 82.0	79.2	Pass
"D" Plane Rotation Decay, Time To Zero Crossing		Msec.	147.0 to 174.0	155.3	Pass
Moment About Occipital Condyle	Maximum	Nm	-52.9 to- 79.9	-65.4	Pass
	Time	Msec.	65.0 to 79.0	68.1	Pass
Positive Moment Decay, Time To Zero Crossing		Msec.	120.0 to 148.0	137.6	Pass
Overall Test Results					Pass

Laboratory Technician

February 14, 2003
Test Date

E-23


TR-P23001-11-NC

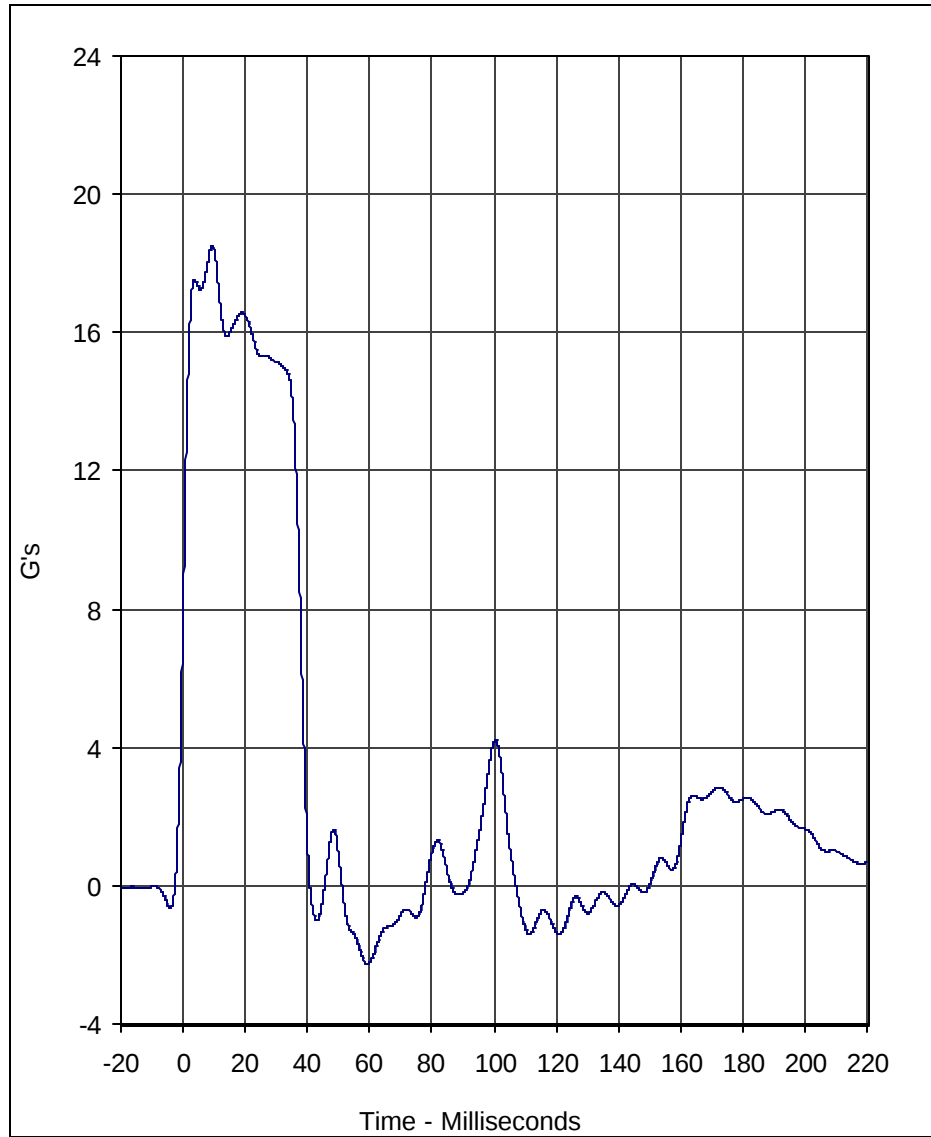

Curve Description				CURNO	Type
Pendulum Deceleration				001	FIL

Units	Max	Time	Min	Time	SAE Class
G's	18.5	9.4	-2.3	59.2	60

Test Program: Hybrid III 50th Percentile Male Neck Extension Test
 Test Date: 2/14/03

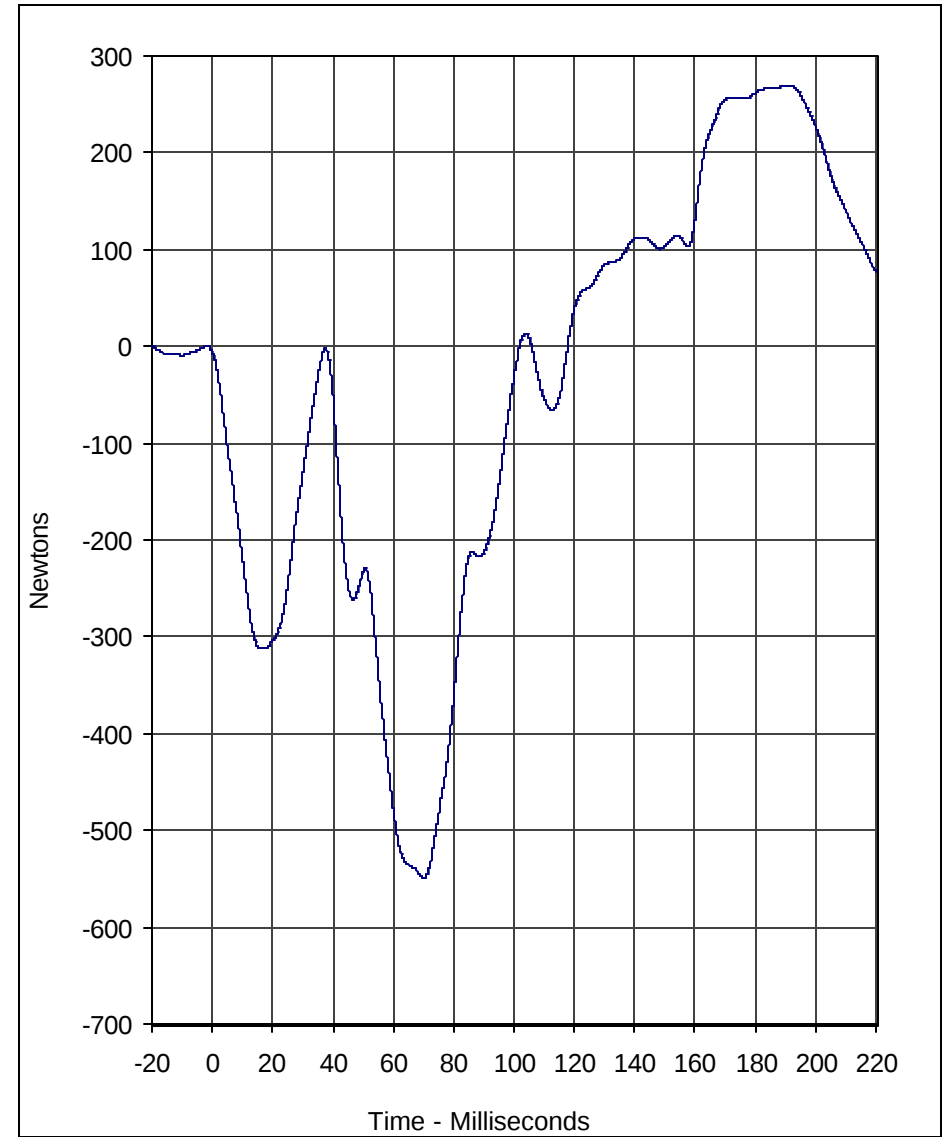


Curve Description				CURNO	Type
Neck Force X				002	FIL

Units	Max	Time	Min	Time	SAE Class
Newtons	270.0	191.3	-548.6	70.1	60


A.T.D. Serial No.: 035
 Test I.D.: NE02A



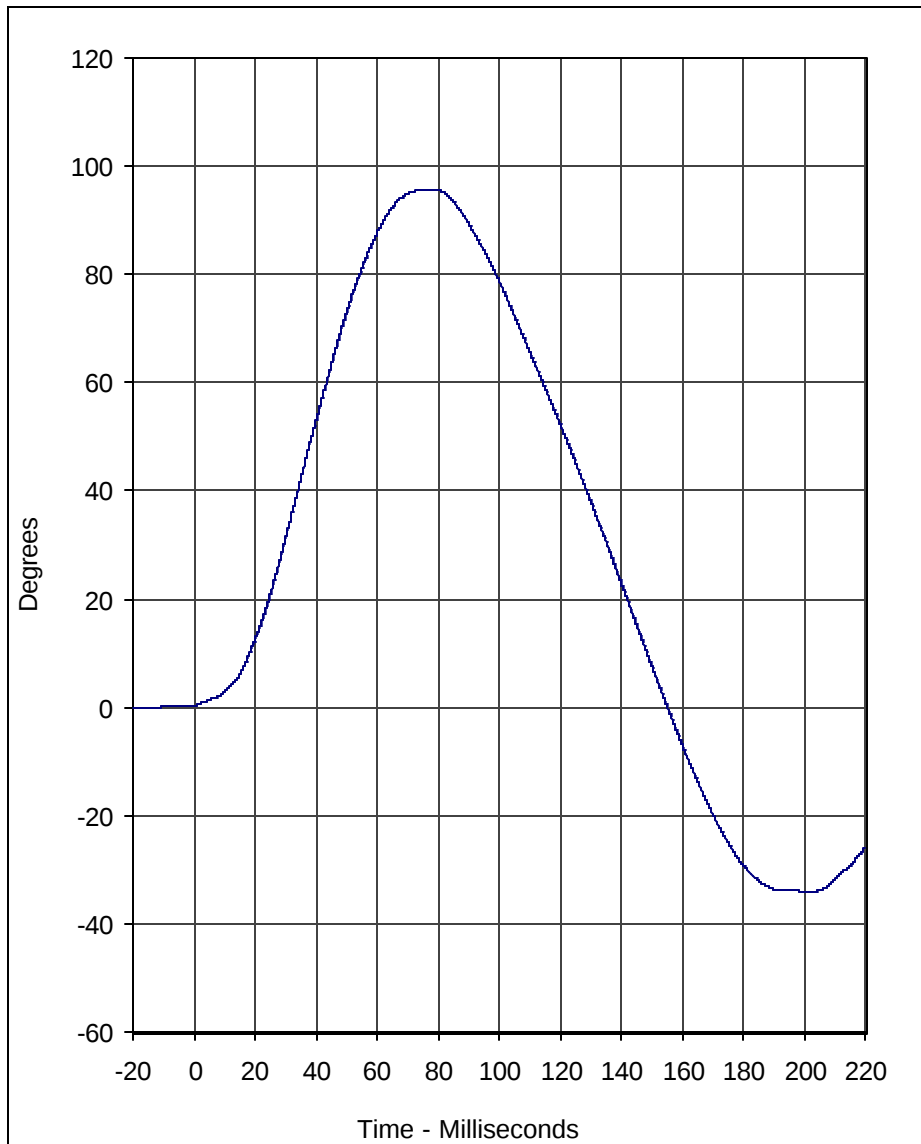

Curve Description				CURNO	Type
"D" Plane Rotation				003	FIL
Units	Max	Time	Min	Time	SAE Class
Degrees	95.6	79.2	-34.0	201.9	60

Test Program: Hybrid III 50th Percentile Male Neck Extension Test
 Test Date: 2/14/03

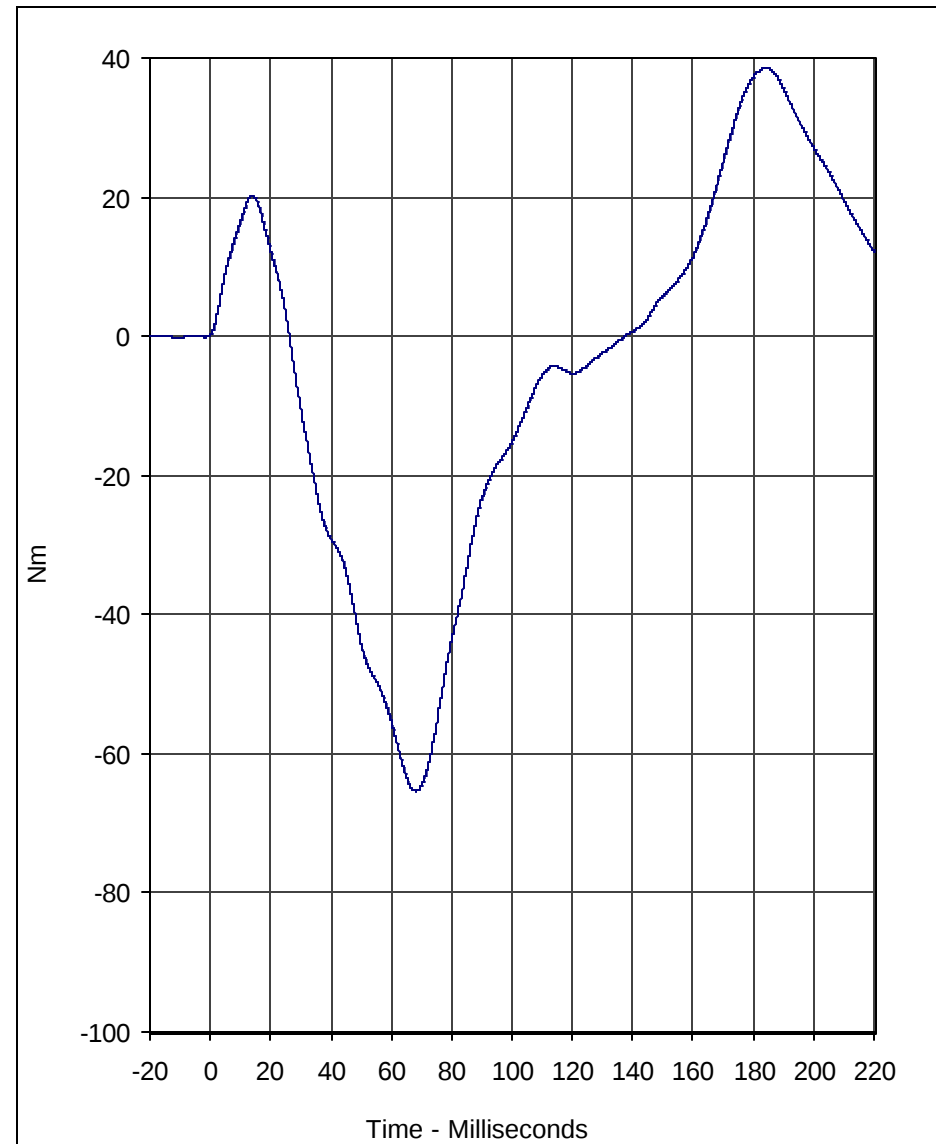

Curve Description				CURNO	Type
Moment About Occipital Condyle				004	FIL
Units	Max	Time	Min	Time	SAE Class
Nm	38.5	184.1	-65.4	68.1	60

A.T.D. Serial No.: 035
 Test I.D.: NE02A





Calibration Data Sheet

Hybrid III 50th Percentile Male

External Measurements

ATD Serial No.: 035

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
A - Total sitting height	mm	879 to 889	880	Pass
B - Shoulder pivot height	mm	505 to 521	510	Pass
C - "H" point height	mm	84 to 89	85	Pass
D - "H" point from seat back	mm	135 to 140	135	Pass
E - Shoulder pivot from back	mm	84 to 94	90	Pass
F - Thigh clearance	mm	140 to 155	145	Pass
G - Elbow back to wrist pivot	mm	290 to 305	300	Pass
H - Skull cap to back line	mm	41 to 46	45	Pass
I - Shoulder to elbow length	mm	330 to 345	340	Pass
J - Elbow rest height	mm	190 to 211	195	Pass
K - Buttock to knee length	mm	579 to 604	595	Pass
L - Popliteal length	mm	429 to 455	445	Pass
M - Knee pivot height	mm	485 to 500	500	Pass
N - Buttock popliteal length	mm	452 to 477	465	Pass
O - Chest depth	mm	213 to 229	220	Pass
P - Foot length	mm	251 to 267	260	Pass
V - Shoulder breadth	mm	422 to 437	430	Pass
W - Foot breadth	mm	91 to 107	95	Pass
Y - Chest circumference	mm	970 to 1001	1000	Pass
Z - Waist circumference	mm	836 to 866	860	Pass
AA - Location for chest circumference	mm	429 to 434	430	Pass
BB - Location for waist circumference	mm	226 to 231	230	Pass
Overall Test Results				Pass

Laboratory Technician

February 17, 2003

Test Date

APPENDIX F

CHILD RESTRAINT SYSYTEM

REPORT NUMBER TR-P23001-11-NC

**NEW CAR ASSESSMENT PROGRAM
FRONTAL BARRIER IMPACT TEST**

**MITSUBISHI MOTORS CORPORATION
2003 MITSUBISHI OUTLANDER
4 DOOR SUV**

NHTSA NUMBER: M35602

**PREPARED BY:
KARCO ENGINEERING, LLC
9270 HOLLY ROAD
ADELANTO, CALIFORNIA 92301**



FEBRUARY 20, 2003

FINAL REPORT

**PREPARED FOR:
U.S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
RULEMAKING
OFFICE OF CRASHWORTHINESS STANDARDS
MAIL CODE: NVS-111
400 SEVENTH STREET, SW, ROOM 5311
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Safety Administration, in response to Contract Number DTNH22-01-D-02005.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: _____
Mr. James E. Gorth, Project Engineer
KARCO Engineering, LLC

Date: March 5, 2003

Reviewed by: _____
Mr. Jerry L. Kratzke, Director of Operations
KARCO Engineering, LLC

Date: March 5, 2003

Approved by: _____
Mr. Frank D. Richardson, Program Manager
KARCO Engineering, LLC

Date: March 5, 2003

FINAL REPORT ACCEPTED BY:

Manager, New Car Assessment Program

Date of Acceptance

COTR, NCAP Frontal Impact Program

Date of Acceptance

Technical Report Documentation Page

1. Report No. TR-P23001-11-NC	2. Government Accession No.	3. Recipients Catalog No.			
4. Title and Subtitle Final Report of Evenflo Vanguard 5 Convertible Final Report of Evenflo Vanguard 5 Comfort Touch NHTSA No. M35602		5. Report Date March 5, 2003			
		6. Performing Organization Code KAR			
7. Authors Mr. James E. Gorth, Project Engineer, Karco Mr. Frank Richardson, Project Manager, Karco		8. Performing Organization Report No. TR-P23001-11-NC			
9. Performing Organization Name and Address KARCO Engineering, LLC 9270 Holly Road Adelanto, CA 92301		10. Work Unit No.			
		11. Contract or Grant No. DTNH22-01-D-02005			
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Rulemaking Office of Crashworthiness Standards Mail Code: NVS-111 400 Seventh Street, SW, Room 5311 Washington, D.C 20590		13. Type of Report and Period Covered Final Test Report Option Year 2			
		14. Sponsoring Agency Code DOT/NHTSA/NRM/OCS/NVS 111			
15. Supplementary Notes					
16. Abstract A CRS Test was performed in conjunction with a New Car Assessment Program (NCAP) Load Cell Barrier Test. This test was conducted at Karco Engineering, LLC on February 20, 2003					
Measurement Description	Units		Left Rear	Right Rear	
Head Injury Criteria (HIC) 36	N/A		1038.0	976.2	
Head Injury Criteria (HIC) 15	G's		537.7	642.5	
3 M sec. Chest Clip	Newtons		45.9	50.7	
Peak Chest Displacement	Newtons		-18.2	-17.3	
17. Key Words 56.3 km/h NCAP Frontal Barrier Impact Test New Car Assessment Program (NCAP) 2003 Mitsubishi Outlander 4 Door SUV NHTSA No. M35602			18. Distribution Statement Copies of this report available from: NHTSA Technical Reference Division National Highway Traffic Safety Admin. 400 Seventh St., SW, Room 5108 Washington, D.C. 20590		
19. Security Classification (this report)	20. Security Classification (this page)		21. No. Pages	22. Price	
Unclassified	Unclassified		148		

TABLE OF CONTENTS

Section	Description	Page
F-1	Purpose and Summary of Test M35602	1
	Data Sheets:	
	1. Crash Test Summary	2
	2. CRS Parameter Data	3
	3. Child Dummy Positioning In Vehicle	4
	4. Child Dummy Injury Criteria and Sensor Data	6
	5. CRS Performance Data	8
	6. CRS Camera Data	9
F-2	Photographs	F-1 thru F-32
F-3	Child Dummy Response and CRS Data Traces	F3-1 thru F3-68
F-4	Child Dummy Instrumentation Information	F4-1 thru F4-2
F-5	Child Dummy Calibration Information	F5-1 thru F5-26

SECTION F-1

PURPOSE AND SUMMARY OF TEST M35602

The purpose of this test is to obtain CRS performance data during an NCAP (35mph) frontal impact test.

The 56.31 km/h NCAP frontal impact test was conducted in accordance with the Office of Crashworthiness Standards (OCS) NCAP Laboratory Test Procedure.

SUMMARY

The three year old child dummies was instrumented with head, chest, and pelvic triaxial accelerometers. In addition, redundant head z acceleration, chest displacement and upper and lower six axial neck force and moment load cell sensors were utilized. Triaxial accelerometers were installed on the CRS and a load cell on the upper tether.

The right rear (Position 3) child dummy (Serial No. 082) and the left rear (Position 4) child dummy (Serial No. 042) were calibrated prior to this test. Child dummy certification information is found in Section F-5.

CHILD DUMMY VALUES

	HIC36 Values	HIC15 Values	3 Msec Chest Clip	Peak Chest Disp.
Left Rear Child	1038.0	537.7	45.9	-18.2
Right Rear Child	976.2	642.5	50.7	-17.3

SECTION F-1

DATA SHEET NO.1.....CRASH TEST SUMMARY

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
 Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
 Test Date: 2/20/03

TEST DUMMY INFORMATION

Description	Position # 3 CRS	Position # 4 CRS
Manufacturer	Evenflo	Evenflo
Model Name	Vanguard 5	Vanguard
Serial No.	3691261 P1	3681261 P1
Type	Convertible	Comfort Touch
Forward/Rearward	Forward	Forward

VISIBLE DUMMY CONTACT POINTS

Description	Position # 3 CRS	Position # 4 CRS
Head Contact	Carseat	CRS/Shield
Chest Contact	Harness	Harness
Abdomen Contact	Harness	Harness
Left Knee Contact	None	None
Right Knee Contact	None	None
Left Toe Contact	Seatback	Seatback
Right Toe Contact	Seatback	Seat

POST TEST DOOR OPENING

Description	Front	Rear
Left Side Doors	Remained closed, opened w/o tools	Remained closed, opened w/o tools
Right Side Doors	Remained closed, opened w/o tools	Remained closed, opened w/o tools
Hatch/Other Door	None	None

POST TEST SEAT DATA

Location	Seat Movement (mm)	Seat Back Failure
Left Front	None	None
Right Front	None	None
Left Rear	None	None
Right Rear	None	None

CAMERA COVERAGE

High Speed	4
Real Time	0
Total	4

SECTION F-1

DATA SHEET NO. 2.....CRS PARAMETER DATA

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
 Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
 Test Date: 2/20/03

TEST VEHICLE WEIGHTS

	Units	As Delivered			As Tested		
		Front Axle	Rear Axle	Total	Front Axle	Rear Axle	Total
Left	kg	443	298		485	348	
Right	kg	433	297		474	345	
Ratio	%	59.6	40.4		58.1	41.9	
Totals	kg	876	595	1471	959	693	1652

TARGET TEST WEIGHT CALCULATION


Measured Parameter	Units	Value
Total Delivered Weight (<i>UVW</i>)	kg	1471
Weight of 2 P572 ATD's	kg	152
Rated Cargo/Luggage Weight (<i>RCLW</i>)	kg	35
Calculated Vehicle Target Weight (<i>TVTW</i>)	kg	1658

SECTION F-1

DATA SHEET NO. 3CHILD DUMMY POSITIONING IN VEHICLE

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
 Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
 Test Date: 2/20/03

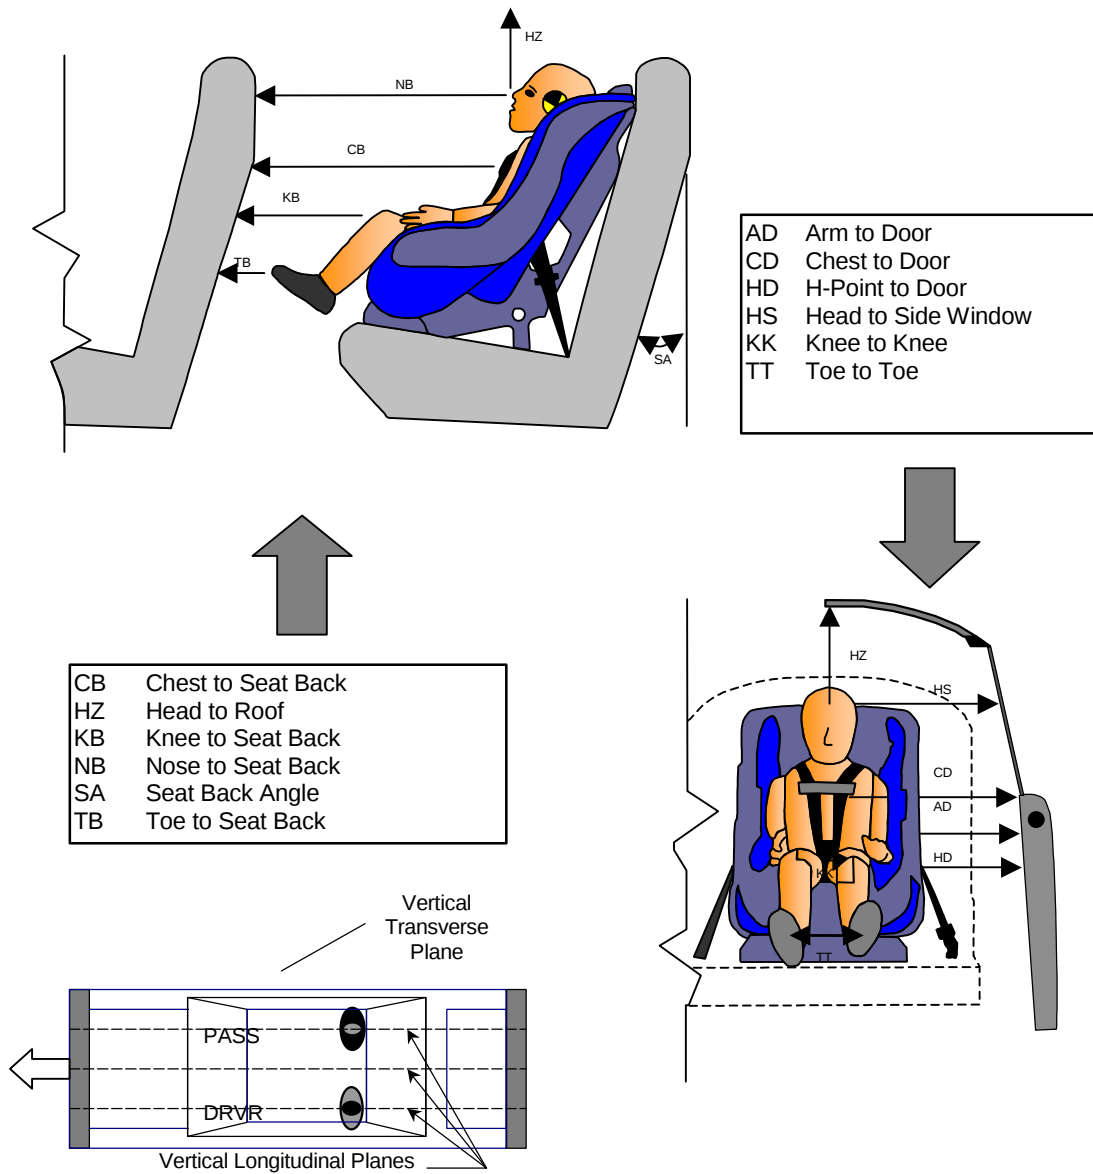

DUMMY MEASUREMENTS FOR REAR SEAT OCCUPANTS

SECTION F-1

DATA SHEET NO. 3CHILD DUMMY POSITIONING IN VEHICLE...(continued)

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
 Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
 Test Date: 2/20/03

CHILD DUMMY POSITION MEASUREMENTS

Code	Measurement	P3 CRS (082)		P4 CRS (042)	
		Pre-Test	Post-test	Pre-Test	Post-test
SA	Seat Back Angle	75	75	75	75
HZ	Head to Roof (Z)	390	375	405	406
CD	Chest to Dash	365	380	360	360
KK	Knee to Knee (Y)	230	240	215	230
HS	Head to Side Window	290	305	275	280
HD	H-Point to Door (Y)	385	385	395	390
AD	Arm to Door (Y)	570	582	555	560
NB	Nose to Seat Back	585	590	545	575
CB	Chest to Seat Back	195	192	195	195
FF	Foot to Foot	220	235	173	195
KB-LEFT	Knee to Seat Back	388	397	328	380
KB-RIGHT	Knee to Seat Back	392	394	320	352
TB-LEFT	Toe to Seat Back	110	125	155	120
TB-RIGHT	Toe to Seat Back	107	95	148	90

DATA SHEET NO. 4 - CHILD DUMMY INJURY CRITERIA AND SENSOR DATATest Vehicle: 2003 Mitsubishi Outlander 4 Door SUVNHTSA No.: M35602Test Program: 2003 NHTSA 35mph NCAPTest Date: 2/20/03**HEAD PRIMARY PEAK ACCELERATIONS**

Location	Axis	Units	Right Rear (3 Yr.)				Left Rear (3 Yr.)			
			Max	Time	Min	Time	Max	Time	Min	Time
Head CG	X	G's	84.3	183.8	-43.4	92.6	52.4	197.6	-55.6	101.4
Head CG	Y	G's	22.2	92.6	-32.5	96.6	2.8	214.6	-10.4	94.3
Head CG	Z	G's	73.4	84.5	-3.7	38.3	71.0	83.9	-3.5	50.7
Head CG Resultant	N/A	G's	92.5	183.8			73.4	83.9		

PRIMARY HEAD INJURY CRITERIAS (HIC)

Location	Right Rear (3 Yr.)				Left Rear (3 Yr.)			
	HIC	T ¹	T ²	Avg G	HIC	T ¹	T ²	Avg G
Head CG Primary (HIC36)	976.2	68.4	104.4	59.3	1038.0	71.3	107.3	60.8
Head CG Primary (HIC15)	642.5	78.5	48.5	71.2	537.7	78.8	93.8	66.3

CHEST PRIMARY PEAK ACCELERATIONS

Location	Axis	Units	Right Rear (3 Yr.)				Left Rear (3 Yr.)			
			Max	Time	Min	Time	Max	Time	Min	Time
Chest CG	X	G's	15.5	176.2	-41.4	71.8	11.3	206.0	-39.3	74.8
Chest CG	Y	G's	4.2	57.5	-5.4	88.0	2.9	203.7	-12.1	96.7
Chest CG	Z	G's	21.5	92.5	-31.0	71.2	17.7	98.8	-31.1	69.3
Chest CG Resultant	N/A	G's	51.7	71.4			46.5	69.8		

PRIMARY CHEST CLIP (3MSEC)

Location	Right Rear (3 Yr.)			Left Rear (3 Yr.)		
	CLIP	T ¹	T ²	CLIP	T ¹	T ²
Chest CG Primary	50.7	69.6	72.6	45.9	68.4	71.4

CHEST PEAK DISPLACEMENTS

Location	Axis	Units	Right Rear (3 Yr.)				Left Rear (3 Yr.)			
			Max	Time	Min	Time	Max	Time	Min	Time
Chest CG	X	MM	0.1	21.1	-17.3	105.2	-0.1	11.0	-18.2	102.6

PELVIC PEAK ACCELERATIONS

Location	Axis	Units	Right Rear (3 Yr.)				Left Rear (3 Yr.)			
			Max	Time	Min	Time	Max	Time	Min	Time
Pelvis	X	G's	16.9	127.2	-53.9	61.8	16.8	115.7	-47.6	49.6
Pelvis	Y	G's	4.8	52.9	-5.9	78.6	5.4	46.2	-12.8	76.1
Pelvis	Z	G's	14.4	94.2	-41.5	71.0	15.4	199.8	-47.8	73.2
Pelvis Resultant	N/A	G's	65.3	70.7			63.1	68.2		

DATA SHEET NO. 4...(continued)

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

NHTSA No.: M35602

Test Program: 2003 NHTSA 35mph NCAP

Test Date: 2/20/03

UPPER NECK PEAK FORCES AND MOMENTS

Location	Axis	Units	Right Rear (3 Yr.)				Left Rear (3 Yr.)			
			Max	Time	Min	Time	Max	Time	Min	Time
Neck Force	X	Newtons	178.9	179.7	-631.2	97.5	7.5	165.2	-872.6	104.2
Neck Force	Y	Newtons	60.6	113.2	-80.6	93.1	19.9	121.7	-254.2	95.0
Neck Force	Z	Newtons	2026.8	85.7	-103.2	36.1	1714.5	84.2	-251.3	208.9
Neck Force Resultant	N/A	Newtons	2087.0	85.8			1841.5	98.0		
Neck Moment	X	Nm	4.3	116.1	-4.2	95.4	3.8	131.5	-14.0	98.6
Neck Moment	Y	Nm	5.9	178.3	-10.4	58.1	5.0	99.0	-22.2	207.0
Neck Moment	Z	Nm	4.2	95.7	-1.3	113.3	3.9	101.2	-2.9	115.8
Neck Moment Resultant	N/A	Nm	10.5	58.1			22.3	207.0		

LOWER NECK PEAK FORCES AND MOMENTS

Location	Axis	Units	Right Rear (3 Yr.)				Left Rear (3 Yr.)			
			Max	Time	Min	Time	Max	Time	Min	Time
Neck Force	X	Newtons	320.4	183.4	-842.4	87.7	204.4	196.0	-803.4	98.5
Neck Force	Y	Newtons	59.6	77.4	-40.2	103.9	274.1	83.9	-454.5	96.9
Neck Force	Z	Newtons	1754.1	83.7	-109.4	36.7	1522.4	81.0	-347.3	52.6
Neck Force Resultant	N/A	Newtons	1919.3	84.3			1563.5	81.0		
Neck Moment	X	Nm	8.2	114.3	-9.7	95.8	5.2	217.3	-59.7	97.3
Neck Moment	Y	Nm	88.4	91.5	-19.5	183.3	2.6	296.9	-33.0	95.0
Neck Moment	Z	Nm	3.2	117.3	-6.2	65.3	85.8	101.4	-9.8	194.5
Neck Moment Resultant	N/A	Nm	88.8	94.1			105.5	98.7		

CHILD SEAT TETHER BELT SENSOR PEAK VALUES

Location	Axis	Units	Right Rear (3 Yr.)				Left Rear (3 Yr.)			
			Max	Time	Min	Time	Max	Time	Min	Time
Tether Belt Force	N/A	Newtons	2787.2	76.9	-67.3	189.5	1436.6	79.5	-29.3	238.4

CHILD SEAT ACCELEROMETER PEAK VALUES

Location	Axis	Units	Right Rear (3 Yr.)				Left Rear (3 Yr.)			
			Max	Time	Min	Time	Max	Time	Min	Time
Child Seat	X	G's	10.2	144.9	-64.7	56.5	8.9	94.4	-62.4	54.5
Child Seat	Y	G's	4.2	145.3	-3.5	78.8	11.7	131.3	-9.2	126.8
Child Seat	Z	G's	18.4	200.6	-18.1	78.4	16.1	205.0	-22.8	65.6
Child Seat Resultant	N/A	G's	65.5	56.4			62.7	54.4		

SECTION F-1**DATA SHEET NO. 5.....CRS PERFORMANCE DATA**

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV
Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602
Test Date: 2/20/03

CRS PERFORMANCE DATA

Location	Serial # Position # 3		Serial # Position # 4	
	Damage	Remarks	Damage	Remarks
Upper Tether Strap	No	None	No	None
Upper Tether Buckle	No	None	No	None
Upper Tether Hook	No	None	No	None
Veh. Upper Tether Anchor	No	None	No	None
Lower Anchor Strap	No	None	No	None
Lower Anchor Buckle	No	None	No	None
Lower Anchor Hooks	No	None	No	None
Veh. Lower CRS Anchors	No	None	No	None
5 Point Harness Connections	No	None	No	None
Cracks on CRS	No	None	No	None
Fabric Tears on CRS	No	None	No	None
Vehicle Seat Structure	No	None	No	None
Vehicle Seat Fabric Tears	No	None	No	None
Child Dummy	No	None	No	None

SECTION F-1

DATA SHEET NO. 6.....CRS CAMERA DATA

Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

NHTSA No.: M35602

Test Program: 2003 NHTSA 35mph NCAP

Test Date: 2/20/03

No.	Camera View	Location (mm)			Angle (Deg.)	Film Plane to Head	Lens (mm)	Speed (fps)
		X	Y	Z				
1	Driver Side Child	2642	8230	2286	15	7880	35	1020
2	Driver Side Child	2642	6096	1524	1	5681	25	DNR
3	Passenger Side Child	2438	-9144	2032	10	8768	25	No Time
4	Passenger Side Child	2438	-8331	1524	1	7921	25	DNR

X - Barrier Face Y - Monorail Centerline Z - Ground DNR = Did Not Run

SECTION F-2

PHOTOGRAPHS

LIST OF PHOTOGRAPHS CRS #3

Figure		Page
1	Close-up View Position 3 CRS Label	F-1
2	Pre-Test Frontal View of Position 3 CRS	F-2
3	Post-Test Frontal View of Position 3 CRS	F-3
4	Pre-Test Rear View of Position 3 CRS	F-4
5	Post-Test Rear View of Position 3 CRS	F-5
6	Pre-Test Left Side View of Position 3 CRS	F-6
7	Post-Test Left Side View of Position 3 CRS	F-7
8	Pre-Test Right Side View of Position 3 CRS	F-8
9	Post-Test Right Side View of Position 3 CRS	F-9
10	Pre-Test Position 3 Front View	F-10
11	Post-Test Position 3 Front View	F-11
12	Pre-Test Position 3 Left Side View	F-12
13	Post-Test Position 3 Left Side View	F-13
14	Pre-Test Position 3 Right Side View	F-14
15	Post-Test Position 3 Right Side View	F-15
16	Post-Test Position 3 Contact Point (Back of Right Front Seat)	F-16

LIST OF PHOTOGRAPHS CRS #4

Figure		Page
17	Close-up View Position 4 CRS Label	F-17
18	Pre-Test Frontal View of Position 4 CRS	F-18
19	Post-Test Frontal View of Position 4 CRS	F-19
20	Pre-Test Rear View of Position 4 CRS	F-20
21	Post-Test Rear View of Position 4 CRS	F-21
22	Pre-Test Left Side View of Position 4 CRS	F-22
23	Post-Test Left Side View of Position 4 CRS	F-23
24	Pre-Test Right Side View of Position 4 CRS	F-24
25	Post-Test Right Side View of Position 4 CRS	F-25
26	Pre-Test position 4 Front View	F-26
27	Post-Test Position 4 Front View	F-27
28	Pre-Test Position 4 Left Side View	F-28
29	Post-Test Position 4 Left Side View	F-29
30	Pre-Test Position 4 Right Side View	F-30
31	Post-Test Position 4 Right Side View	F-31
32	Post-Test Position 4 Contact Point (Back of Left Front Seat)	F-32



Figure F-1: Close-up View Position 3 CRS Label



Figure F-2: Pre-Test Frontal View of Position 3 CRS



Figure F-3: Post-Test Frontal View of Position 3 CRS



Figure F-4: Pre-Test Rear View of Position 3 CRS



Figure F-5: Post-Test Rear View of Position 3 CRS



Figure F-6: Pre-Test Left Side View of Position 3 CRS



Figure F-7: Post-Test Left Side View of Position 3 CRS



Figure F-8: Pre-Test Right Side View of Position 3 CRS



Figure F-9: Post-Test Right Side View of Position 3 CRS



Figure F-10: Pre-Test Position 3 Front View



Figure F-11: Post-Test Position 3 Front View



Figure F-12: Pre-Test Position 3 Left Side View



Figure F-13: Post-Test Position 3 Left Side View



Figure F-14: Pre-Test Position 3 Right Side View



Figure F-15: Post-Test Position 3 Right Side View



Figure F-16: Post-Test Position 3 Contact Point (Back of Right Front Seat)

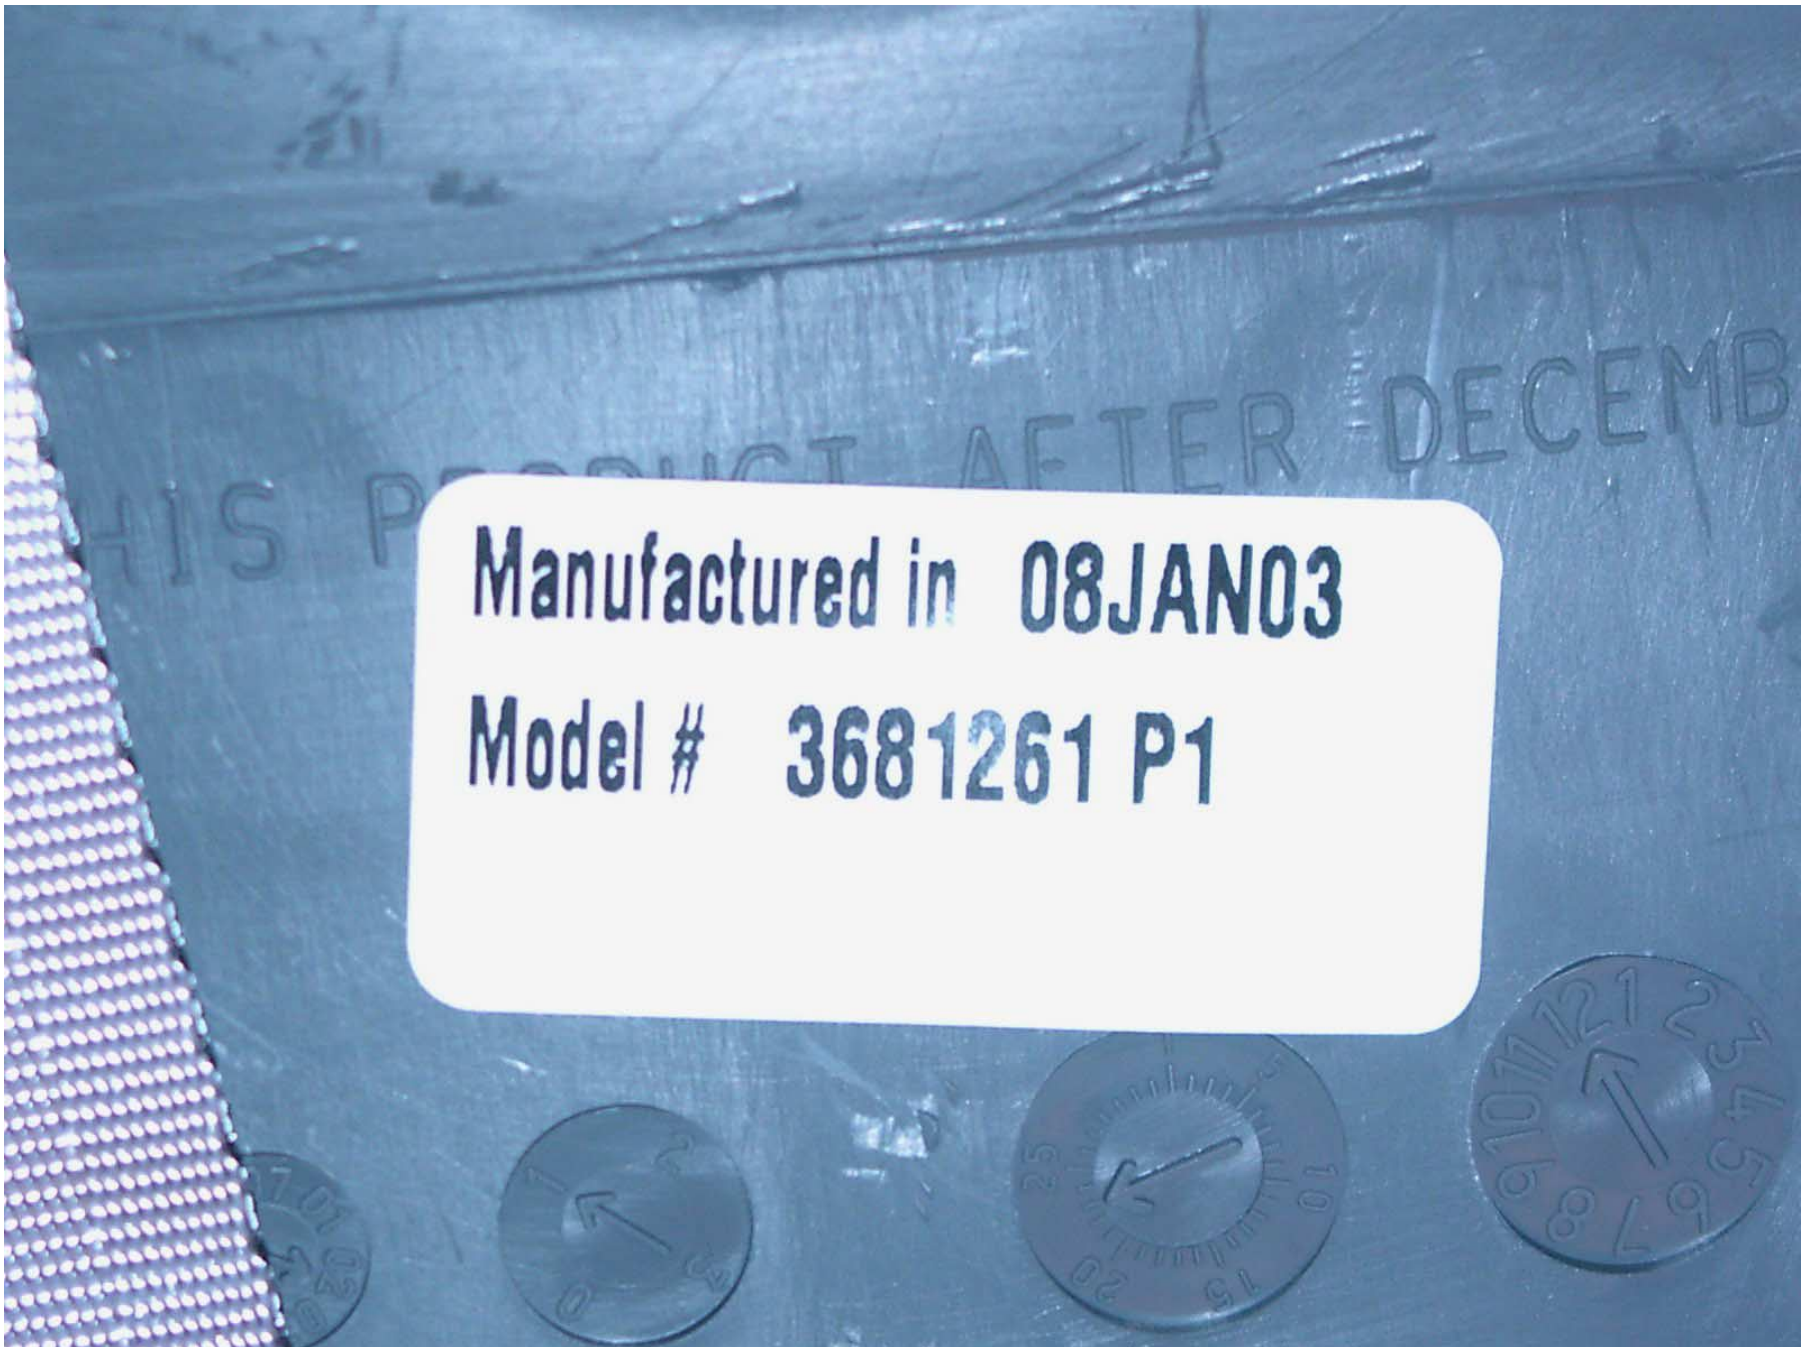


Figure F-17: Close-up View Position 4 CRS Label



Figure F-18: Pre-Test Frontal View of Position 4 CRS



Figure F-19: Post-Test Front View of Position 4 CRS



Figure F-21: Post-Test Rear View of Position 4 CRS



Figure F-22: Pre-Test Left Side View of Position 4 CRS



Figure F-23: Post-Test Left Side View of Position 4 CRS



Figure F-24: Pre-Test Right Side View of Position 4 CRS



Figure F-25: Post-Test Right Side View of Position 4 CRS



Figure F-26: Pre-Test Position 4 Front View



Figure F-27: Post-Test Position 4 Front View



Figure F-28: Pre-Test Position 4 Left Side View



Figure F-29: Post-Test Position 4 Left Side View



Figure F-30: Pre-Test Position 4 Right Side View



Figure F-31: Post-Test Position 4 Right Side View



Figure F-32: Post-Test Position 4 Contact Point (Back of Left Front Seat)

SECTION F-3


CHILD DUMMY RESPONSE AND CRS DATA TRACES

LIST OF DATA PLOTS #3

<u>Data Plot</u>		<u>Page</u>
F3-1	Right Rear Child (3 yr. old) Head X	F3-1
F3-2	Right Rear Child (3 yr. old) Head Y	F3-2
F3-3	Right Rear Child (3 yr. old) Head Z	F3-3
F3-4	Right Rear Child (3 yr. old) Head Resultant	F3-4
F3-5	Right Rear Child (3 yr. old) Upper Neck Force X	F3-5
F3-6	Right Rear Child (3 yr. old) Upper Neck Force Y	F3-6
F3-7	Right Rear Child (3 yr. old) Upper Neck Force Z	F3-7
F3-8	Right Rear Child (3 yr. old) Upper Neck Force Resultant	F3-8
F3-9	Right Rear Child (3 yr. old) Upper Neck Moment X	F3-9
F3-10	Right Rear Child (3 yr. old) Upper Neck Moment Y	F3-10
F3-11	Right Rear Child (3 yr. old) Upper Neck Moment Z	F3-11
F3-12	Right Rear Child (3 yr. old) Upper Neck Moment Resultant	F3-12
F3-13	Right Rear Child (3 yr. old) Lower Neck Force X	F3-13
F3-14	Right Rear Child (3 yr. old) Lower Neck Force Y	F3-14
F3-15	Right Rear Child (3 yr. old) Lower Neck Force Z	F3-15
F3-16	Right Rear Child (3 yr. old) Lower Neck Force Resultant	F3-16
F3-17	Right Rear Child (3 yr. old) Lower Neck Moment X	F3-17
F3-18	Right Rear Child (3 yr. old) Lower Neck Moment Y	F3-18
F3-19	Right Rear Child (3 yr. old) Lower Neck Moment Z	F3-19
F3-20	Right Rear Child (3 yr. old) Lower Neck Moment Resultant	F3-20
F3-21	Right Rear Child (3 yr. old) Chest X	F3-21
F3-22	Right Rear Child (3 yr. old) Chest Y	F3-22
F3-23	Right Rear Child (3 yr. old) Chest Z	F3-23
F3-24	Right Rear Child (3 yr. old) Chest Resultant	F3-24
F3-25	Right Rear Child (3 yr. old) Chest Deflection	F3-25
F3-26	Right Rear Child (3 yr. old) Pelvis X	F3-26
F3-27	Right Rear Child (3 yr. old) Pelvis Y	F3-27
F3-28	Right Rear Child (3 yr. old) Pelvis Z	F3-28
F3-29	Right Rear Child (3 yr. old) Pelvis Resultant	F3-29
F3-30	Right Rear Child (3 yr. old) Child Seat Tether Load	F3-30
F3-31	Right Rear Child (3 yr. old) Car Seat X	F3-31
F3-32	Right Rear Child (3 yr. old) Car Seat Y	F3-32
F3-33	Right Rear Child (3 yr. old) Car Seat Z	F3-33
F3-34	Right Rear Child (3 yr. old) Car Seat Resultant	F3-34

LIST OF DATA PLOTS CRS #4

<u>Data Plot</u>	<u>Page</u>
F3-35 Left Rear (3yr. old) Head X	F3-35
F3-36 Left Rear (3yr. old) Head Y	F3-36
F3-37 Left Rear (3yr. old) Head Z	F3-37
F3-38 Left Rear (3yr. old) Head Resultant	F3-38
F3-39 Left Rear (3yr. old) Upper Neck Force X	F3-39
F3-40 Left Rear (3yr. old) Upper Neck Force Y	F3-40
F3-41 Left Rear (3yr. old) Upper Neck Force Z	F3-41
F3-42 Left Rear (3yr. old) Upper Neck Force Resultant	F3-42
F3-43 Left Rear (3yr. old) Upper Neck Moment X	F3-43
F3-44 Left Rear (3yr. old) Upper Neck Moment Y	F3-44
F3-45 Left Rear (3yr. old) Upper Neck Moment Z	F3-45
F3-46 Left Rear (3yr. old) Upper Neck Moment Resultant	F3-46
F3-47 Left Rear (3yr. old) Lower Neck Force X	F3-47
F3-48 Left Rear (3yr. old) Lower Neck Force Y	F3-48
F3-49 Left Rear (3yr. old) Lower Neck Force Z	F3-49
F3-50 Left Rear (3yr. old) Lower Neck Force Resultant	F3-50
F3-51 Left Rear (3yr. old) Lower Neck Moment X	F3-51
F3-52 Left Rear (3yr. old) Lower Neck Moment Y	F3-52
F3-53 Left Rear (3yr. old) Lower Neck Moment Z	F3-53
F3-54 Left Rear (3yr. old) Lower Neck Moment Resultant	F3-54
F3-55 Left Rear (3yr. old) Chest X	F3-55
F3-56 Left Rear (3yr. old) Chest Y	F3-56
F3-57 Left Rear (3yr. old) Chest Z	F3-57
F3-58 Left Rear (3yr. old) Chest Resultant	F3-58
F3-59 Left Rear (3yr. old) Chest Deflection	F3-59
F3-60 Left Rear (3yr. old) Pelvis X	F3-60
F3-61 Left Rear (3yr. old) Pelvis Y	F3-61
F3-62 Left Rear (3yr. old) Pelvis Z	F3-62
F3-63 Left Rear (3yr. old) Pelvis Resultant	F3-63
F3-64 Left Rear (3yr. old) Seat Tether Load	F3-64
F3-65 Left Rear (3yr. old) Car Seat X	F3-65
F3-66 Left Rear Car Seat Y	F3-66
F3-67 Left Rear Car Seat Z	F3-67
F3-68 Left Rear Car Seat Resultant	F3-68

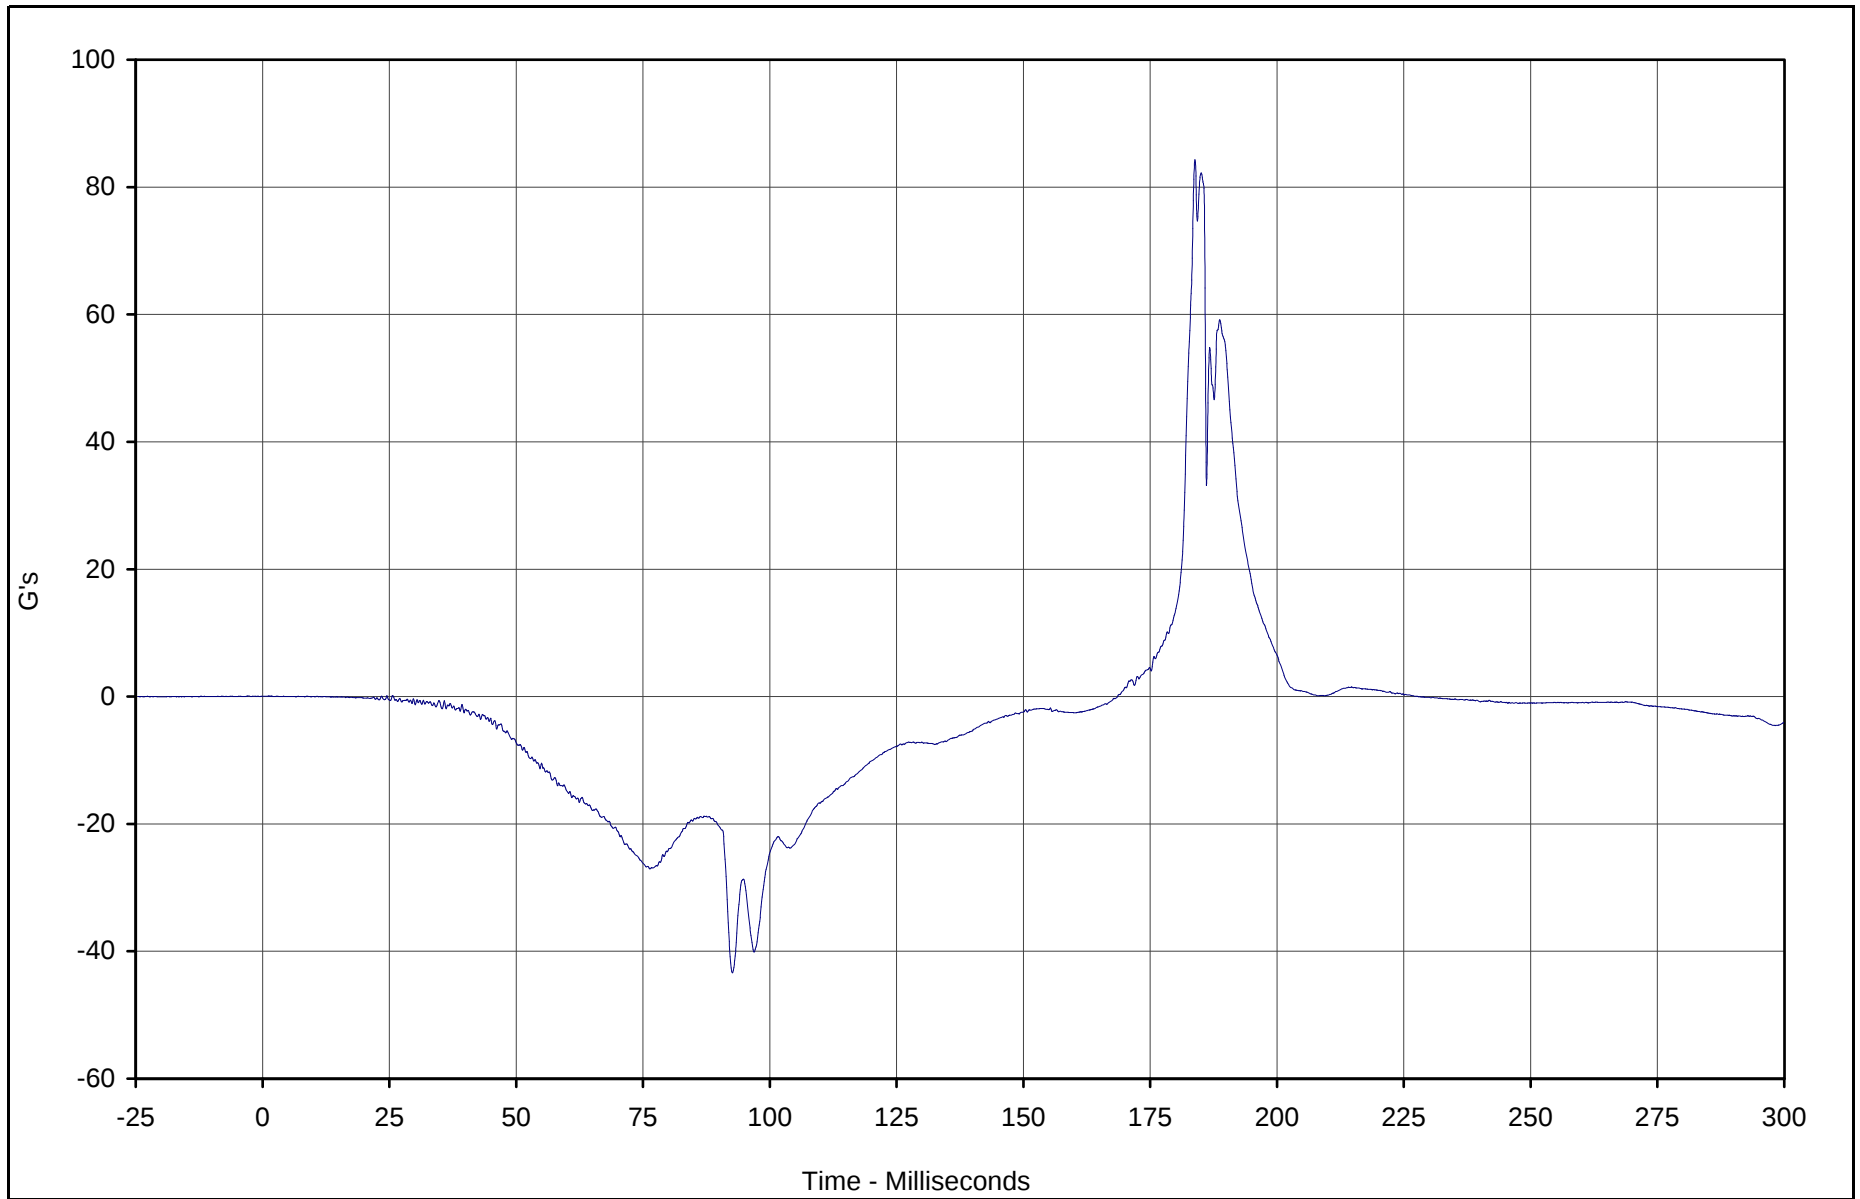

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Head X	134	FIL	G's	84.3	183.8	-43.4	92.6	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

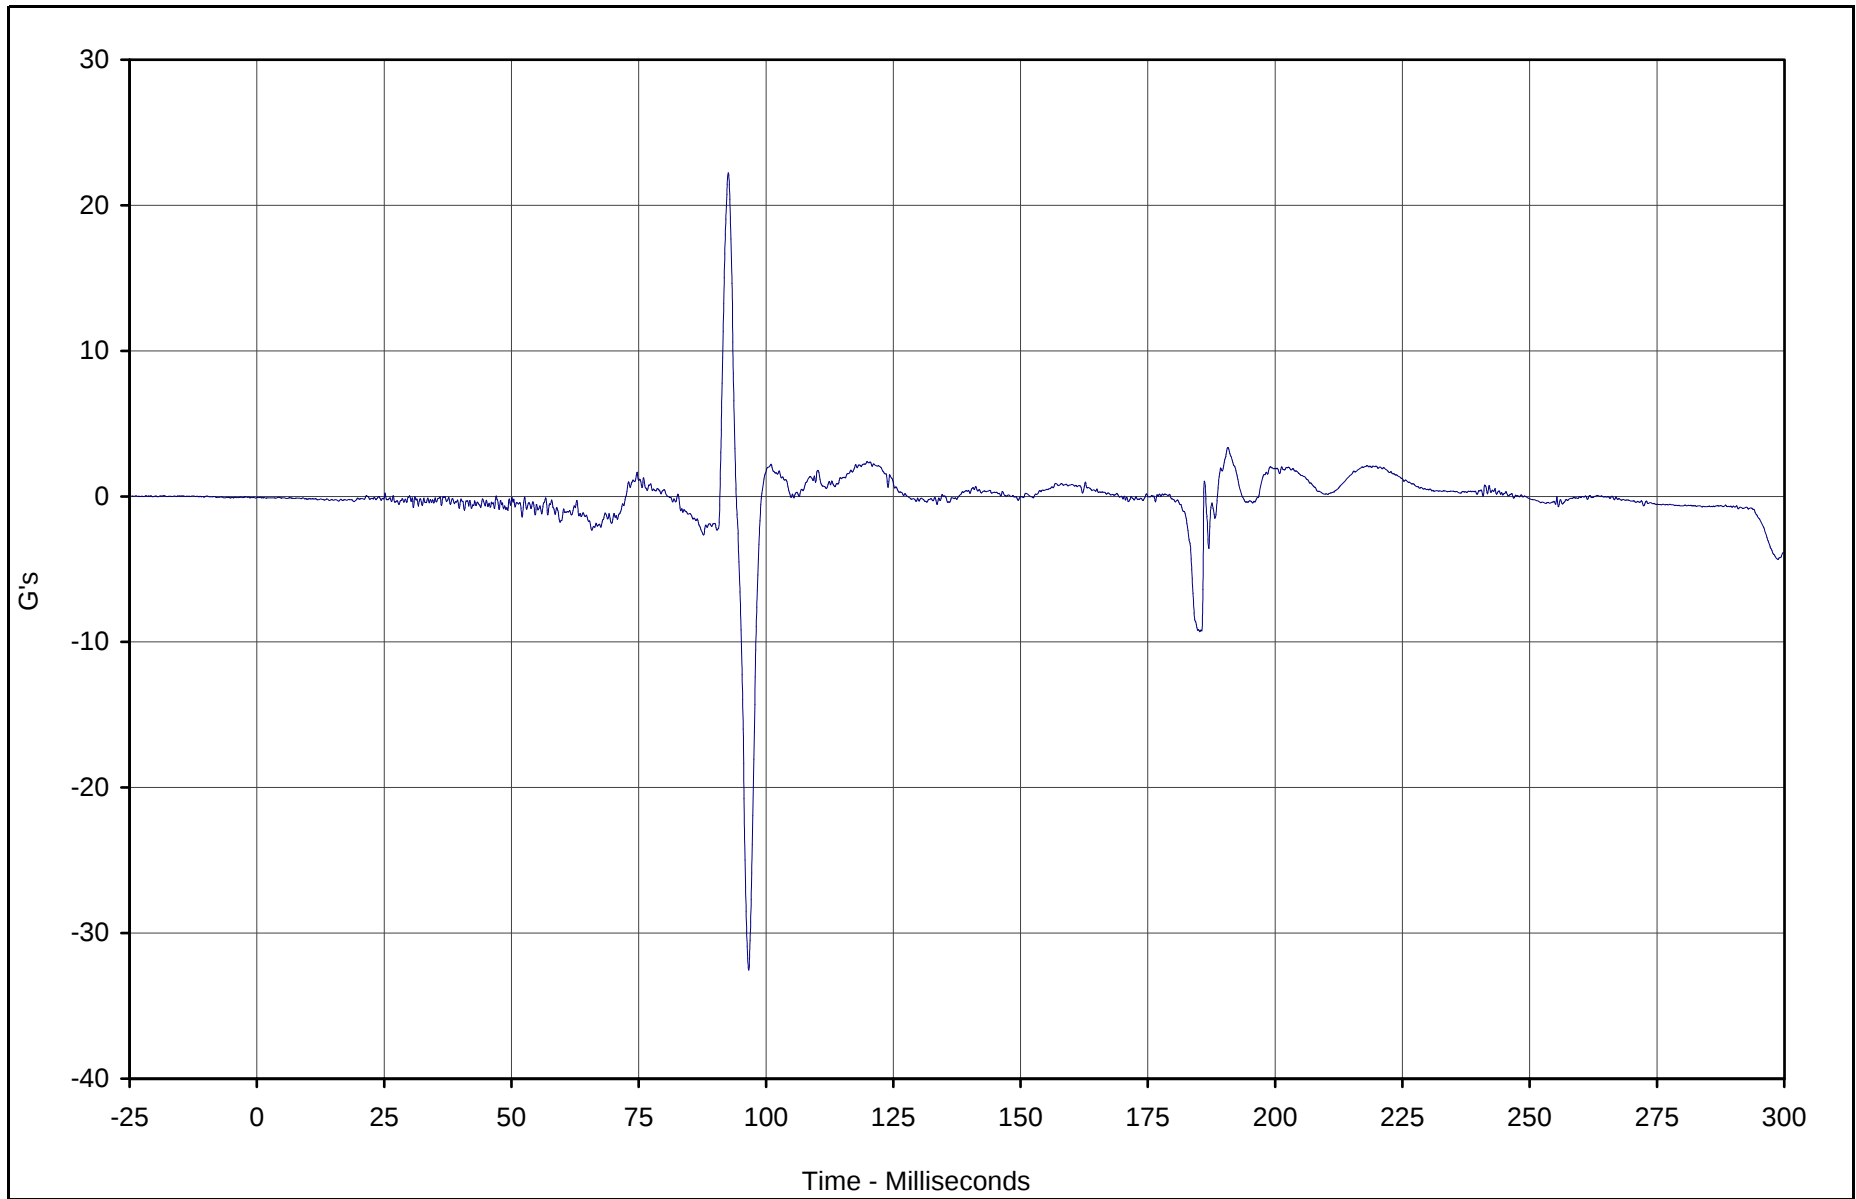

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Head Y	135	FIL	G's	22.2	92.6	-32.5	96.6	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

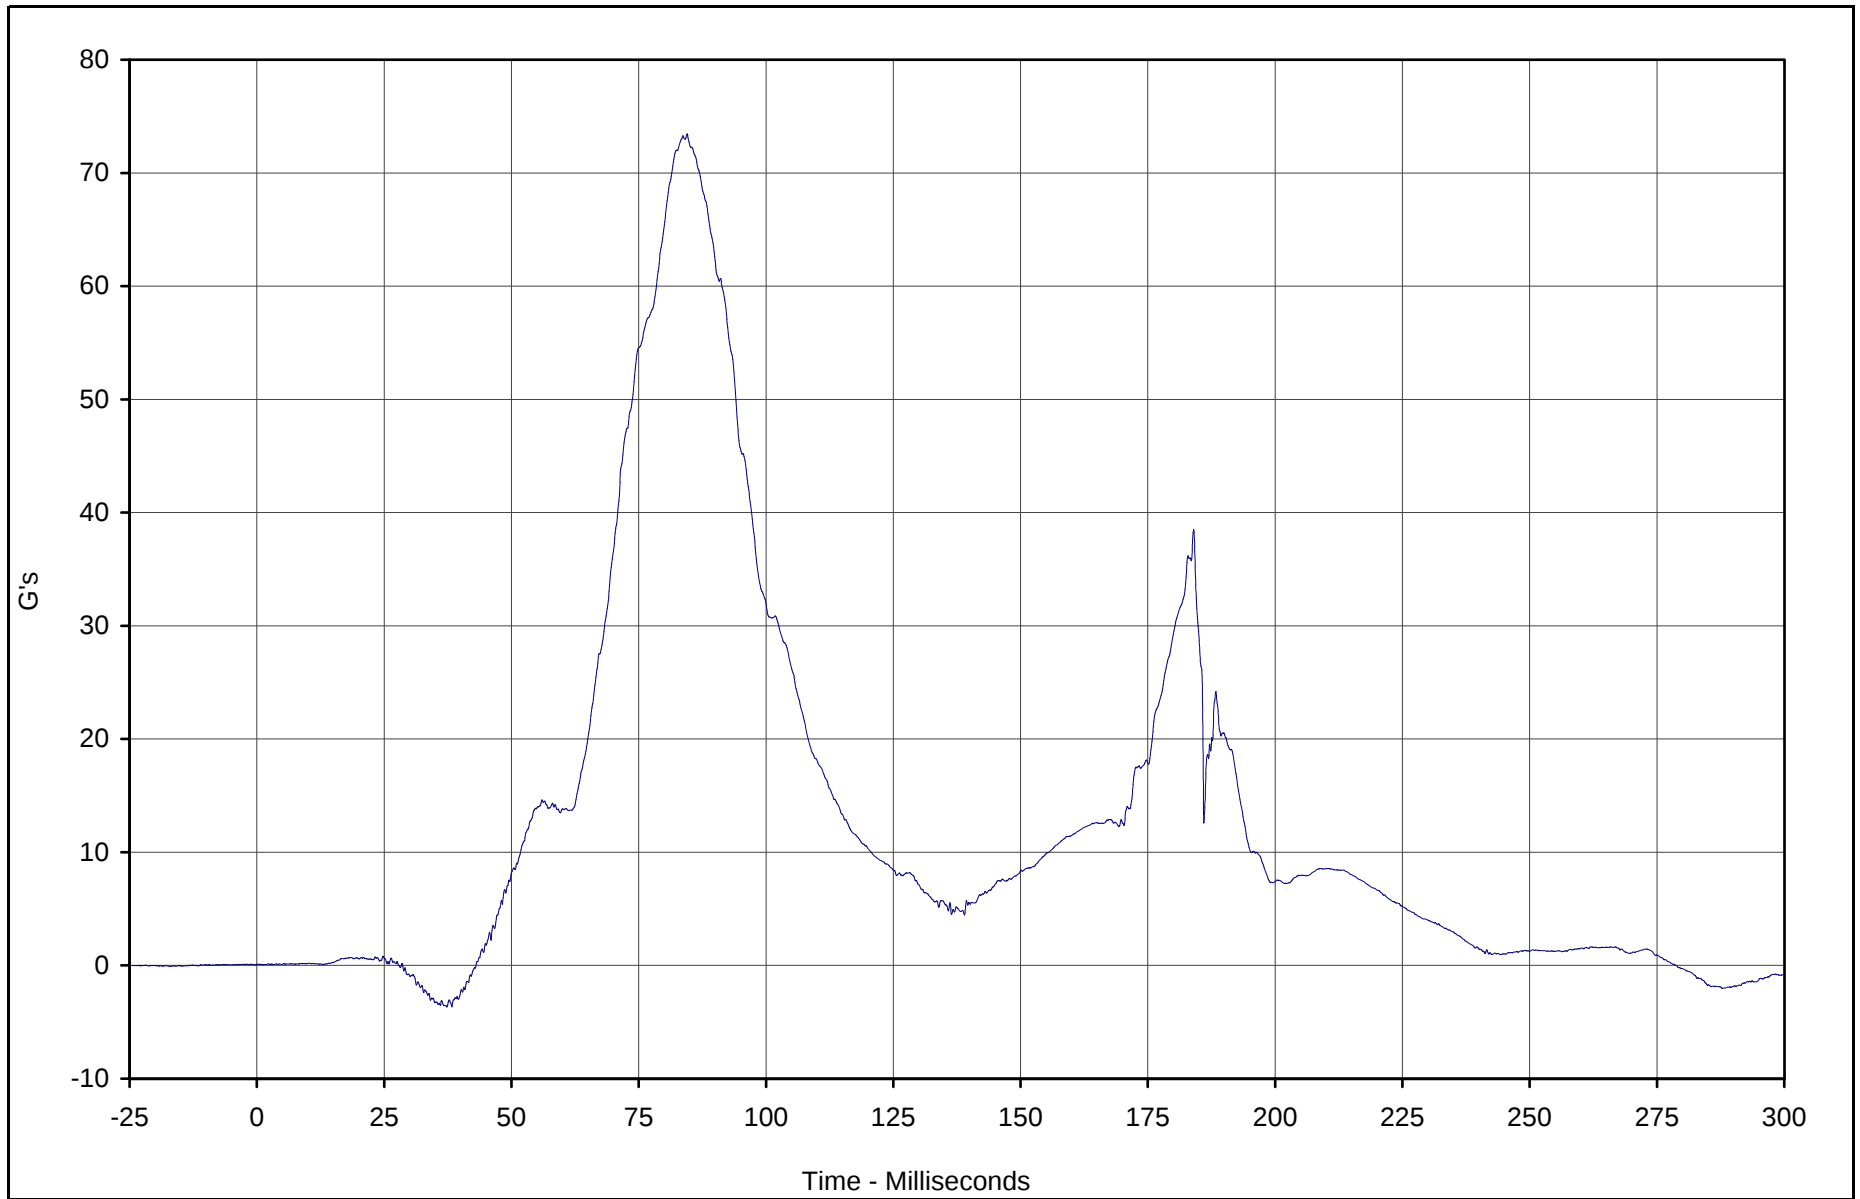

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Head Z	136	FIL	G's	73.4	84.5	-3.7	38.3	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

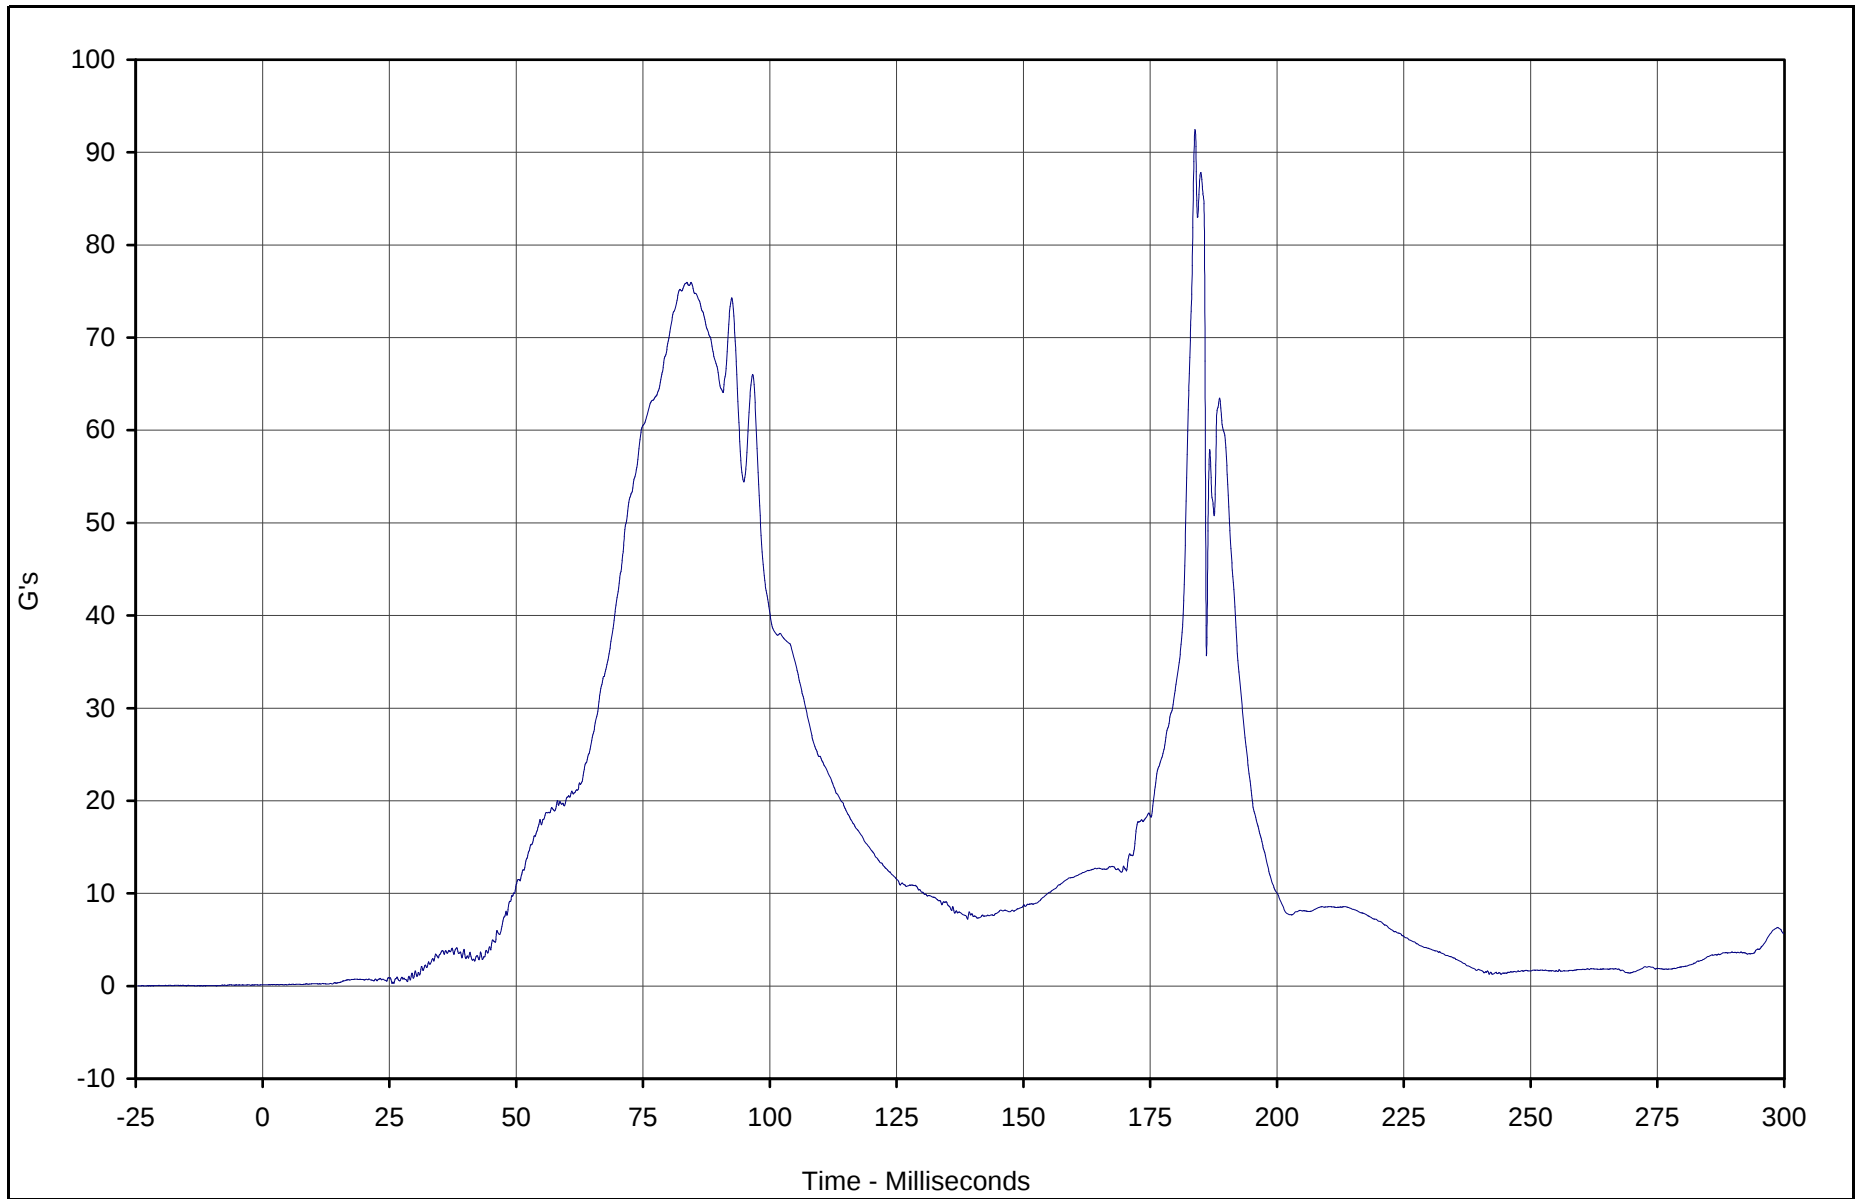

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Head Resultant	134	RES	G's	92.5	183.8	0.1	4.2	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

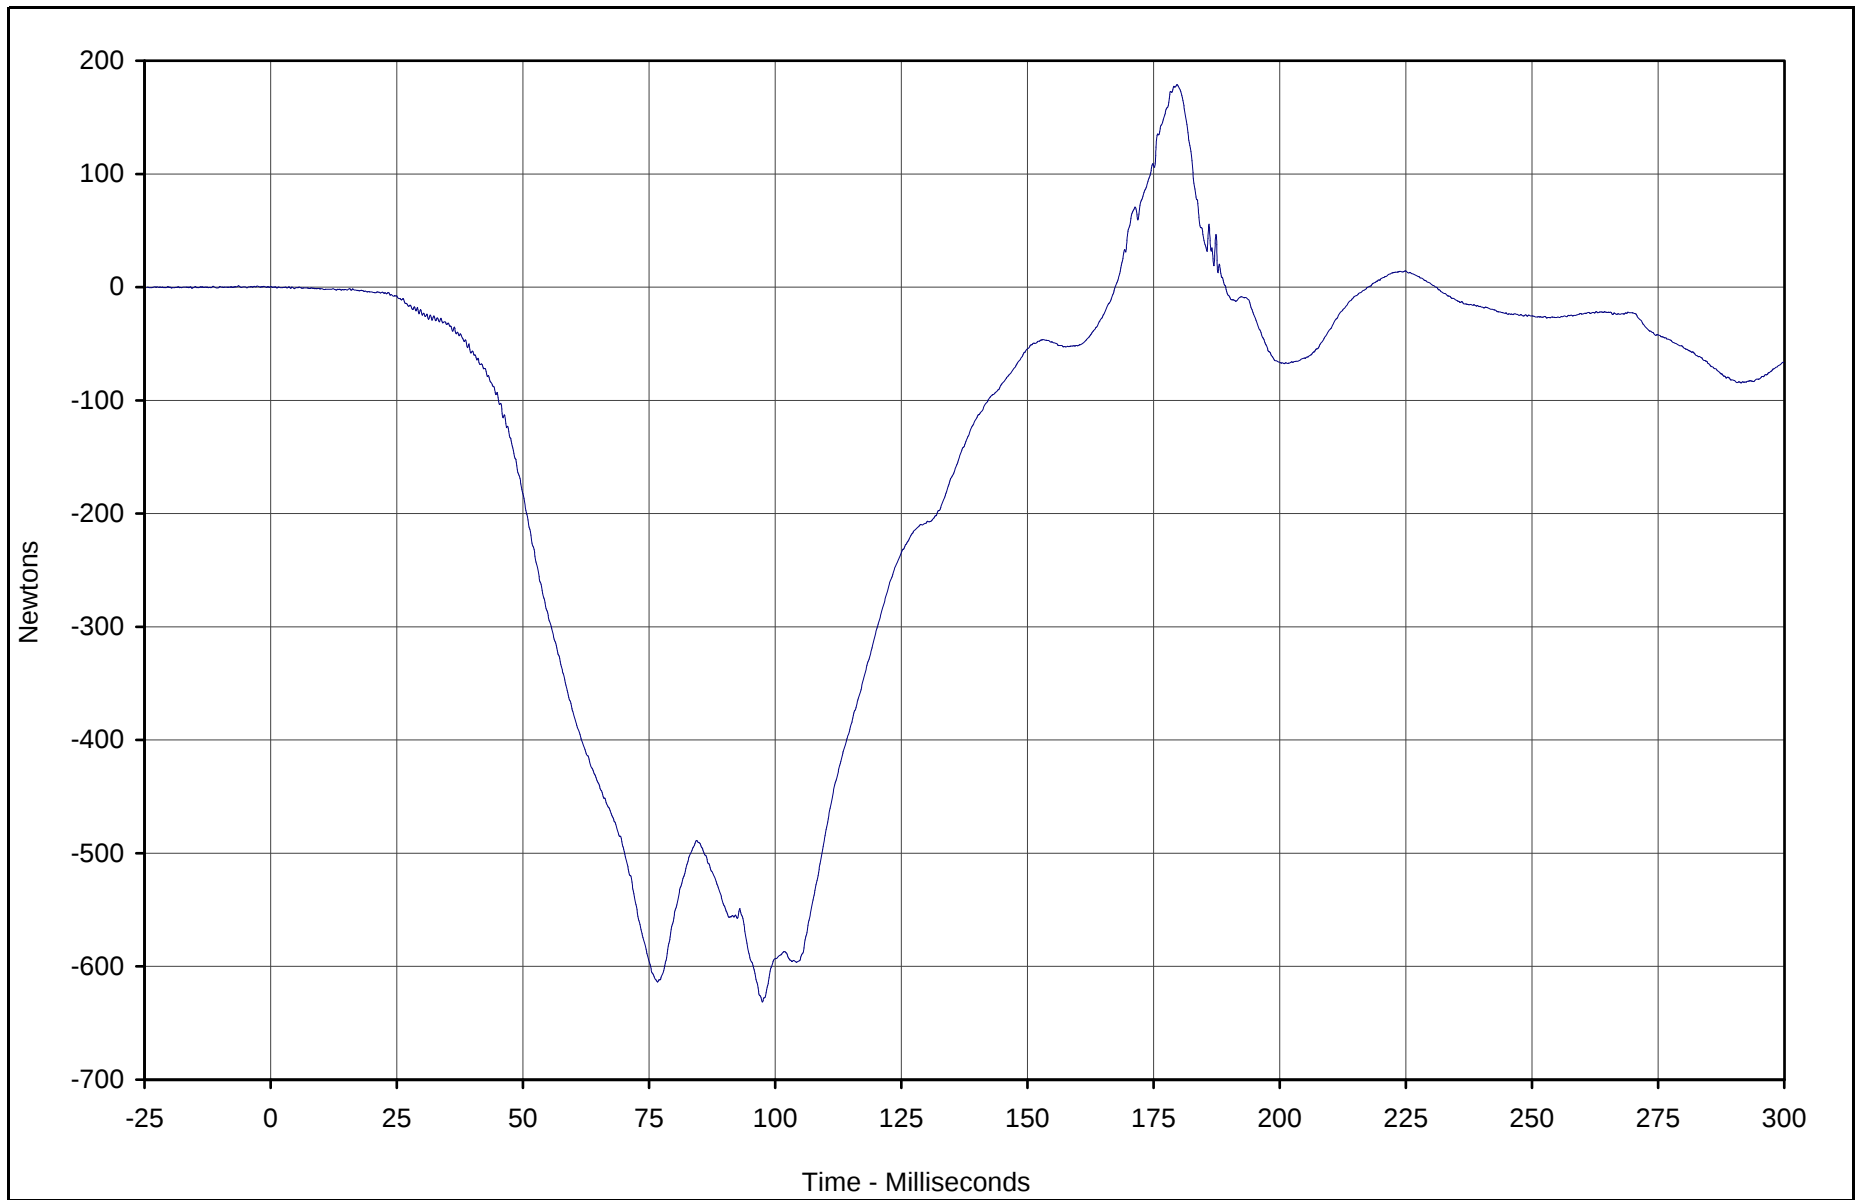

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Upper Neck Force X	137	FIL	Newtons	178.9	179.7	-631.2	97.5	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

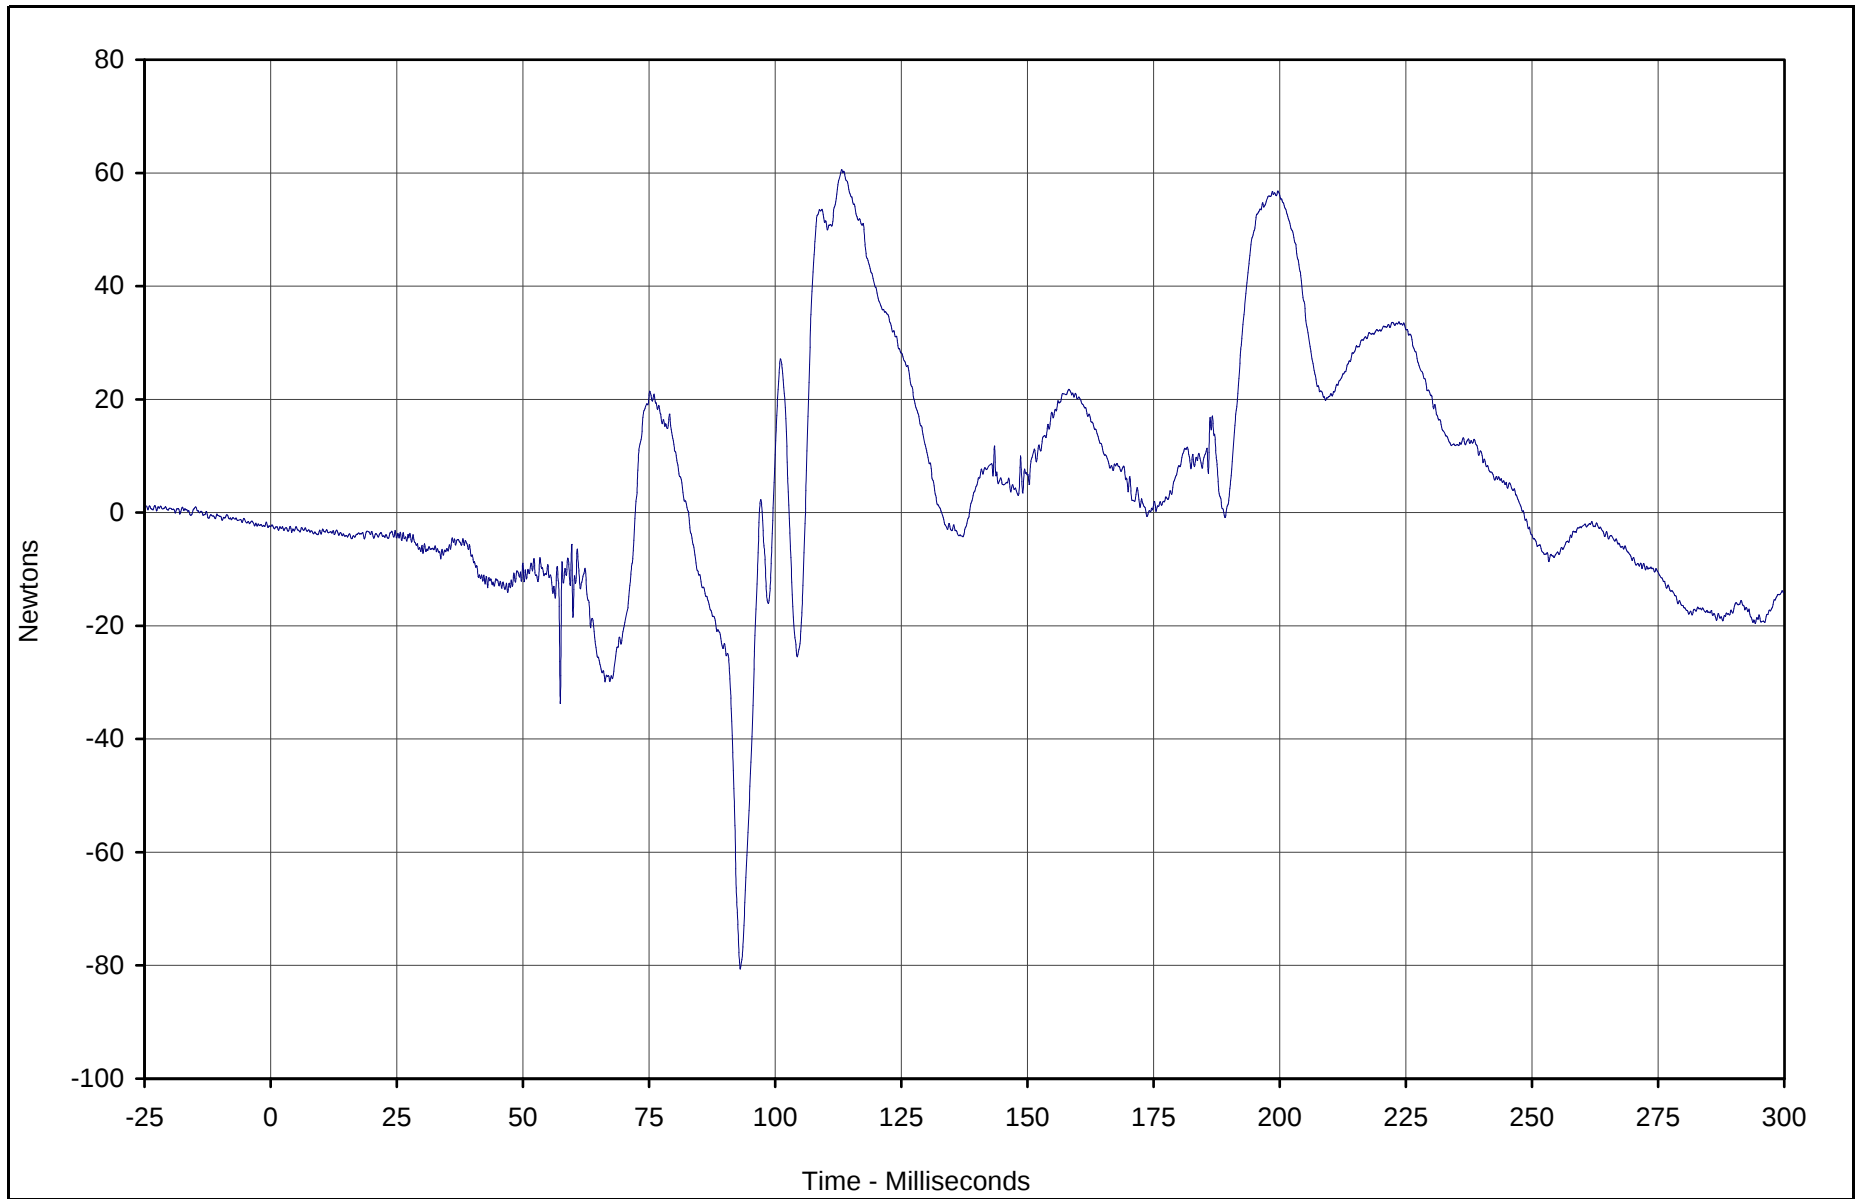

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Upper Neck Force Y	138	FIL	Newtons	60.6	113.2	-80.6	93.1	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

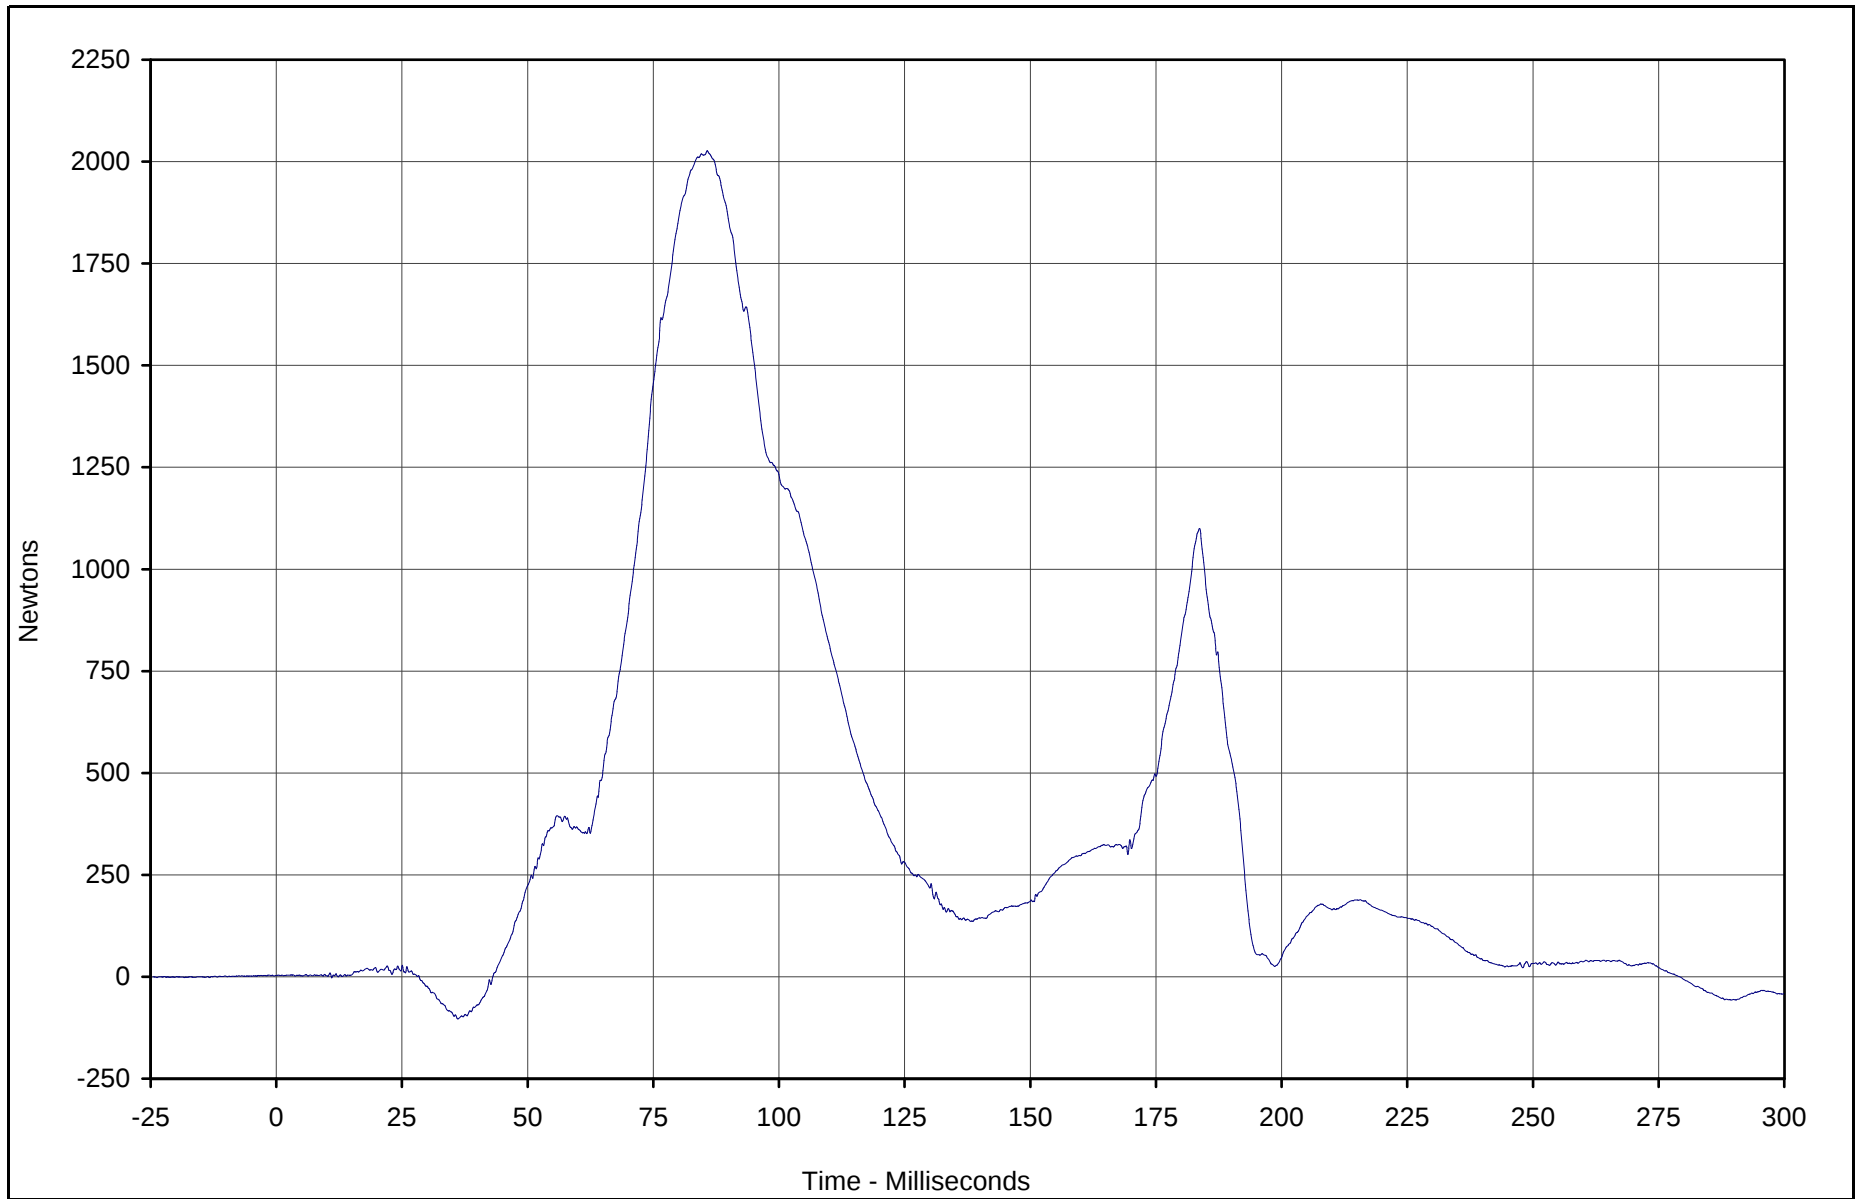

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Upper Neck Force Z	139	FIL	Newtons	2026.8	85.7	-103.2	36.1	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

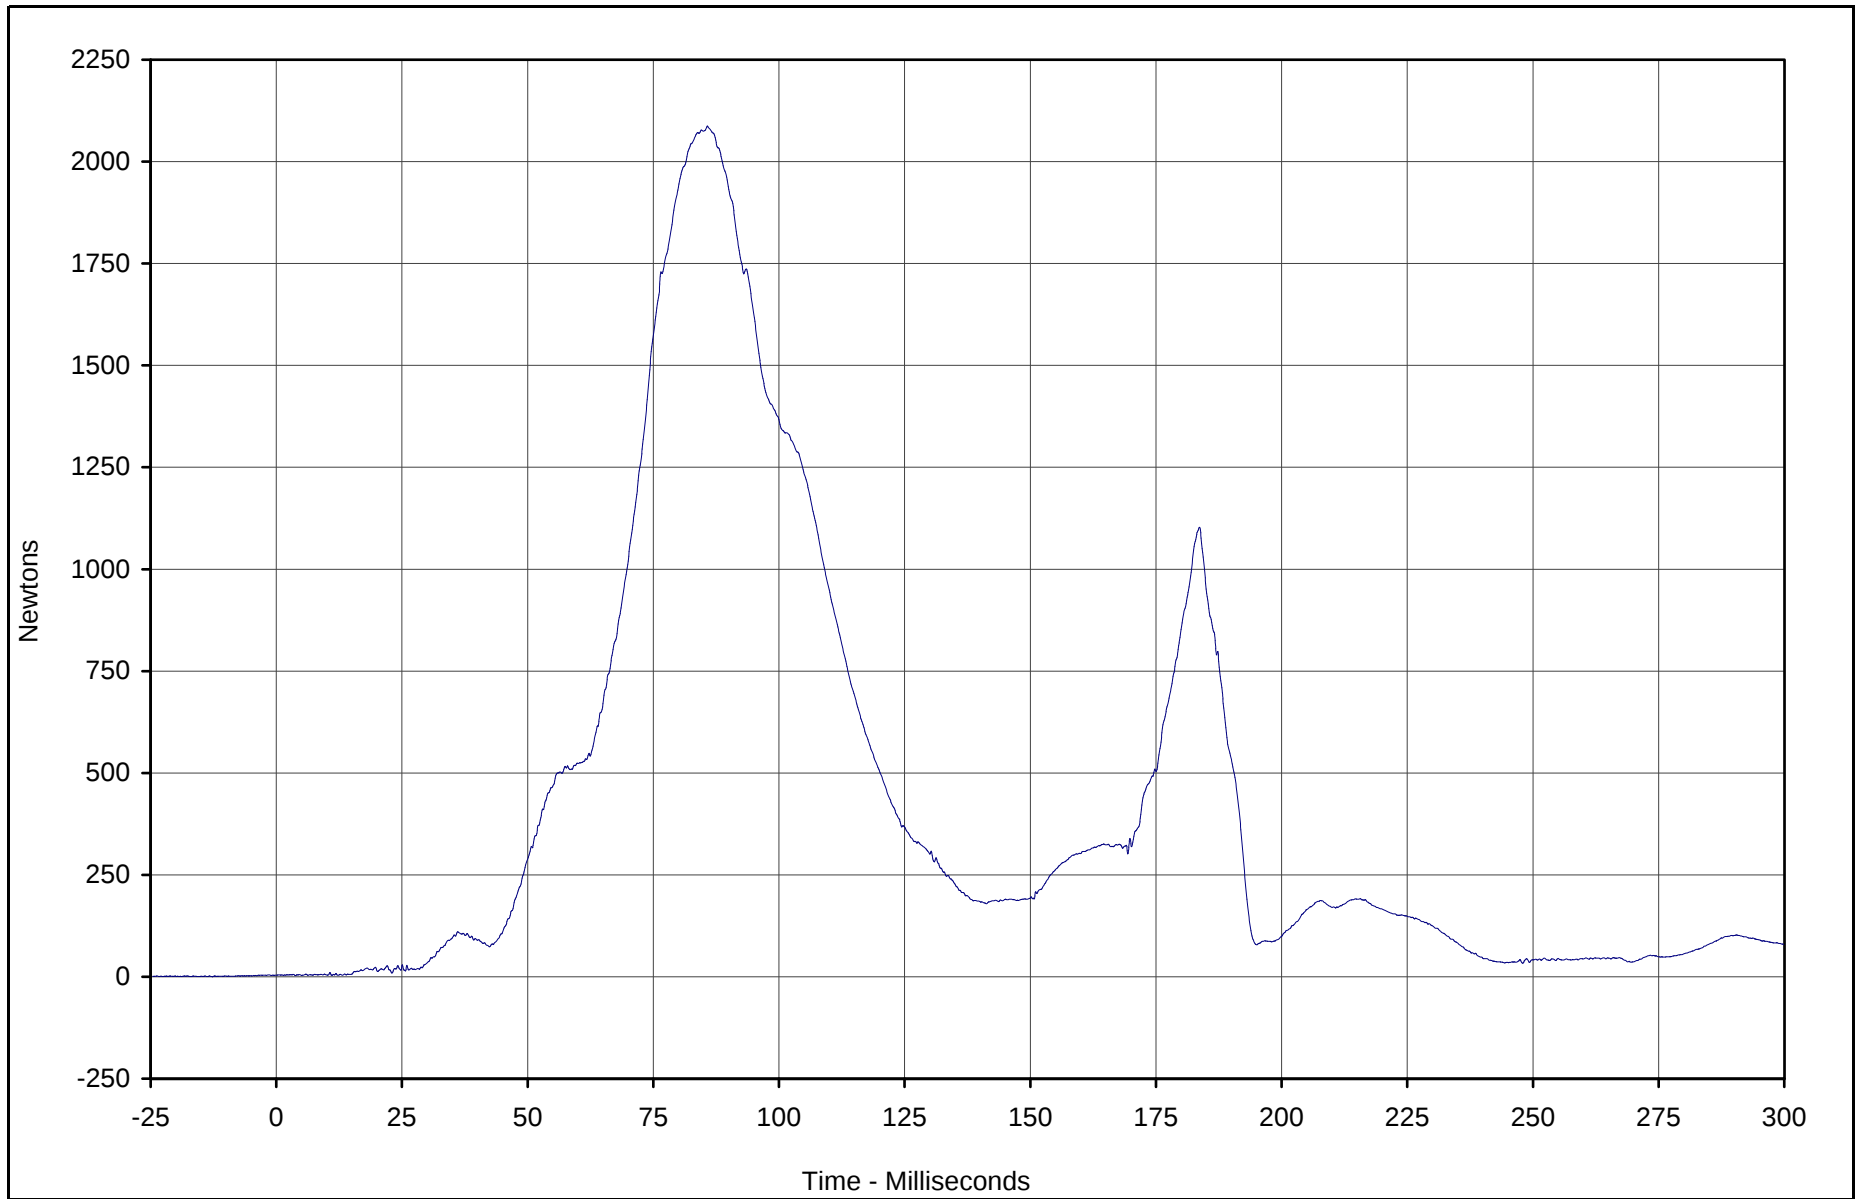

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Upper Neck Force Res.	137	RES	Newtons	2087.0	85.8	3.0	3.8	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

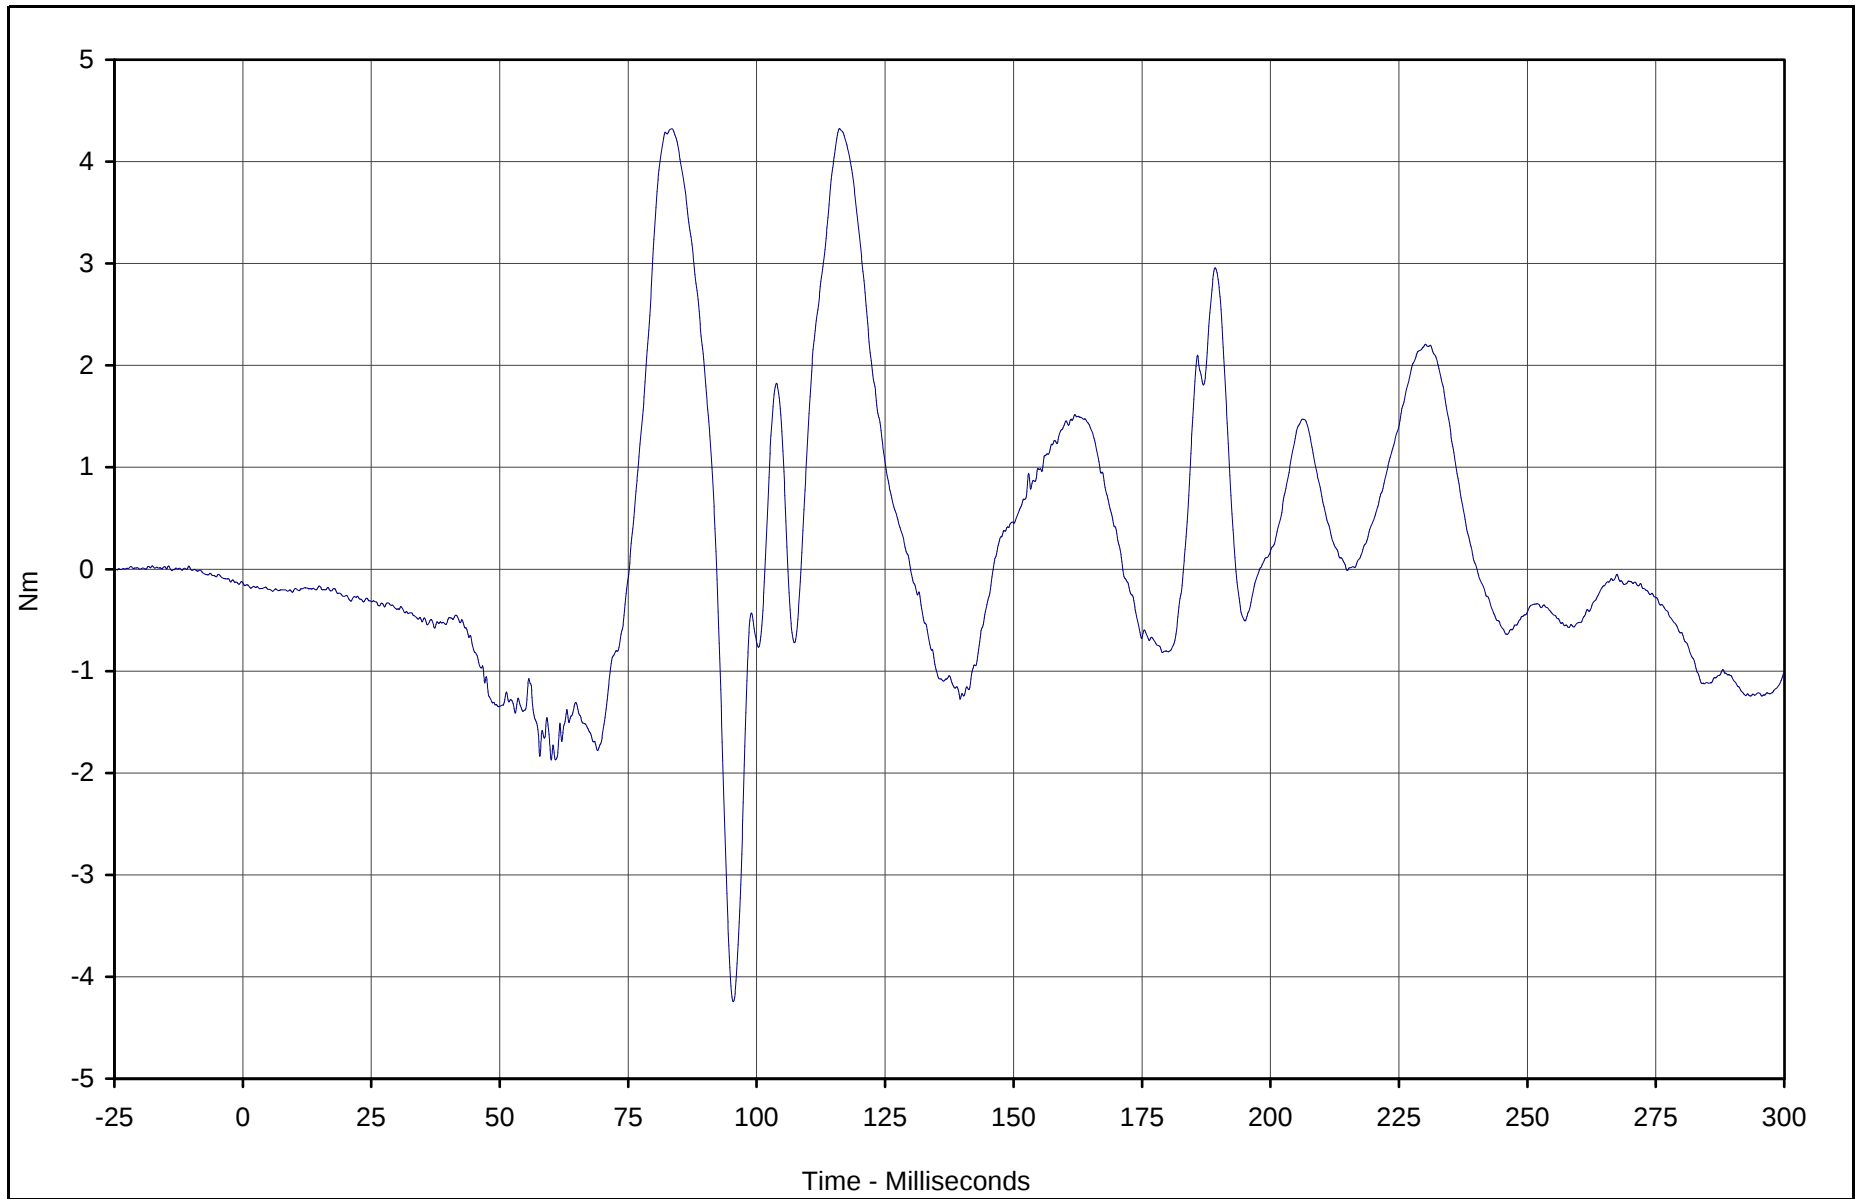

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Upper Neck Moment X	140	FIL	Nm	4.3	116.1	-4.2	95.4	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

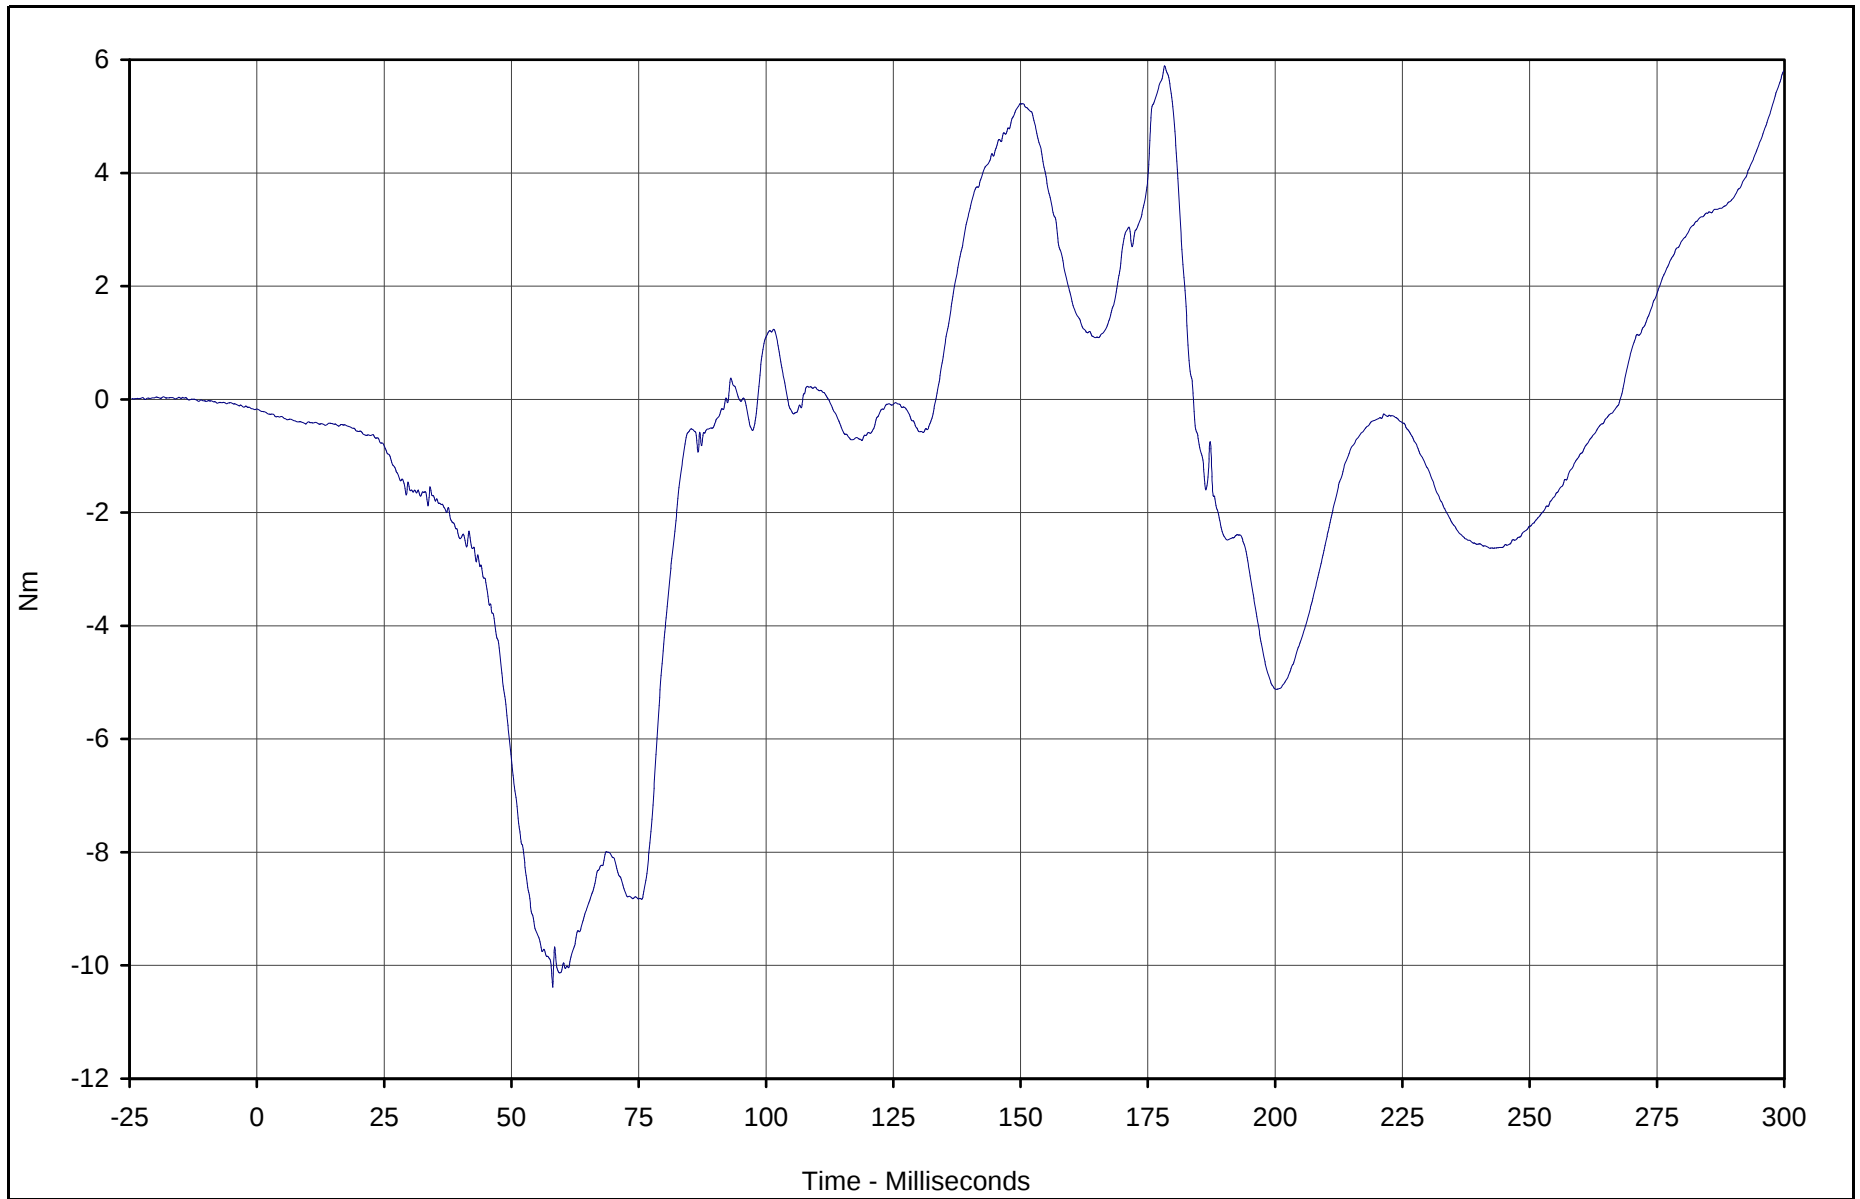

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Upper Neck Moment Y	141	FIL	Nm	5.9	178.3	-10.4	58.1	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

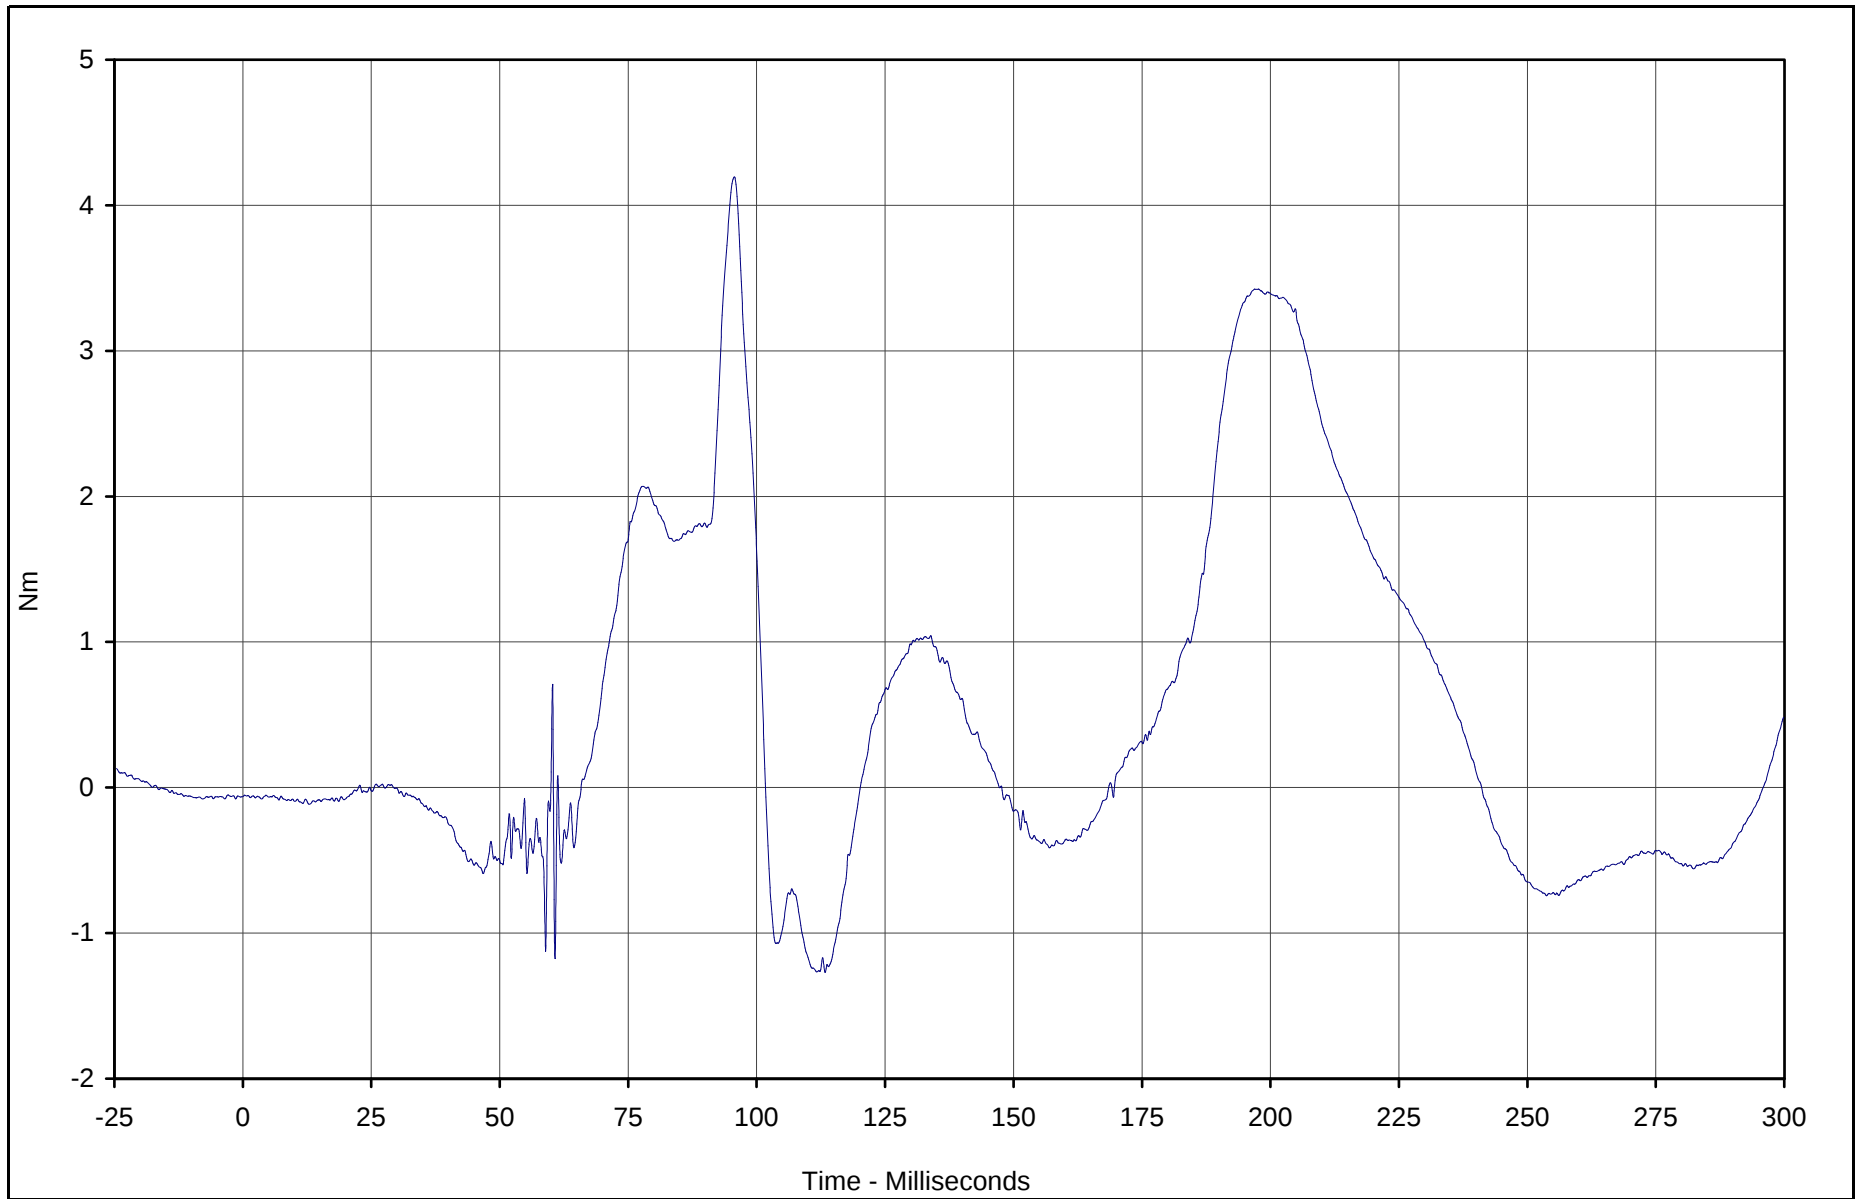

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Upper Neck Moment Z	142	FIL	Nm	4.2	95.7	-1.3	113.3	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

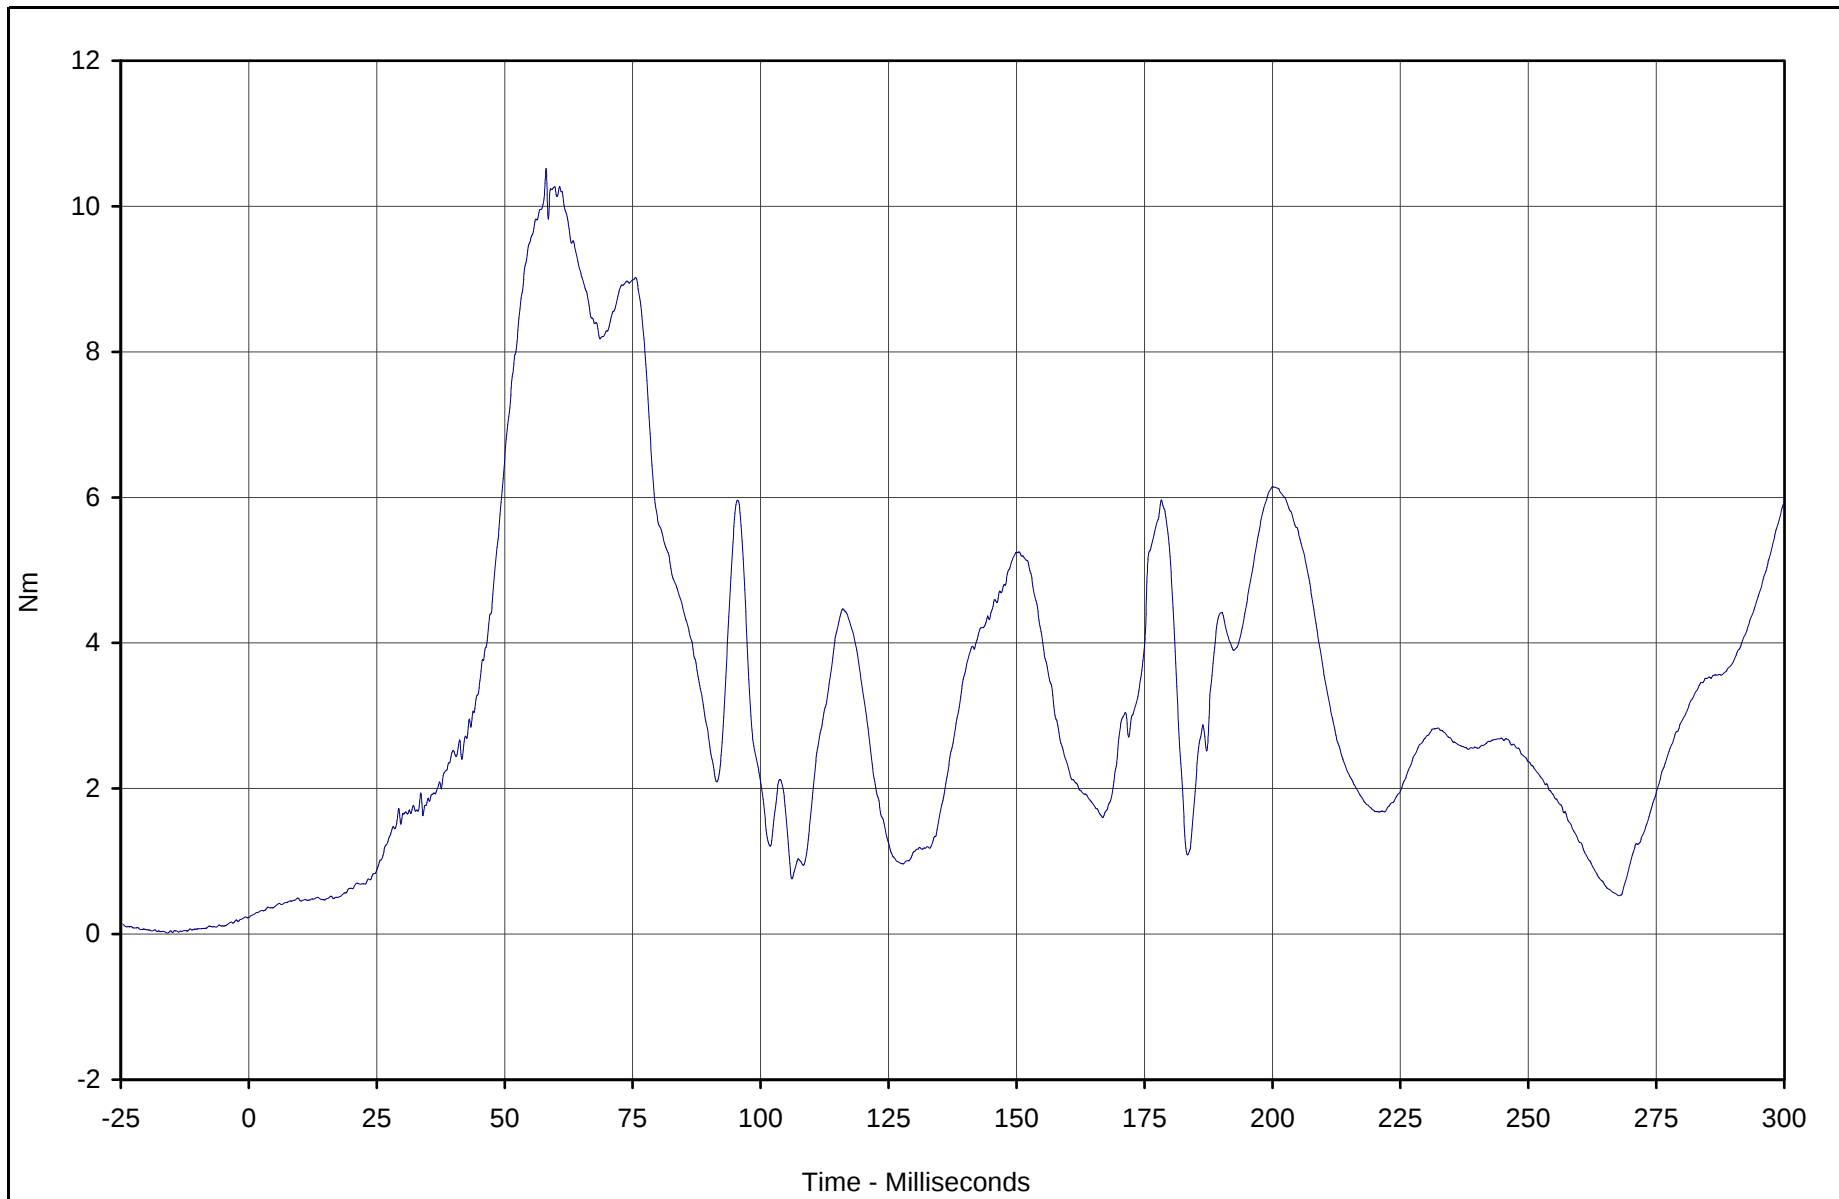

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Upper Neck Mom Res.	140	RES	Nm	10.5	58.1	0.2	0.0	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

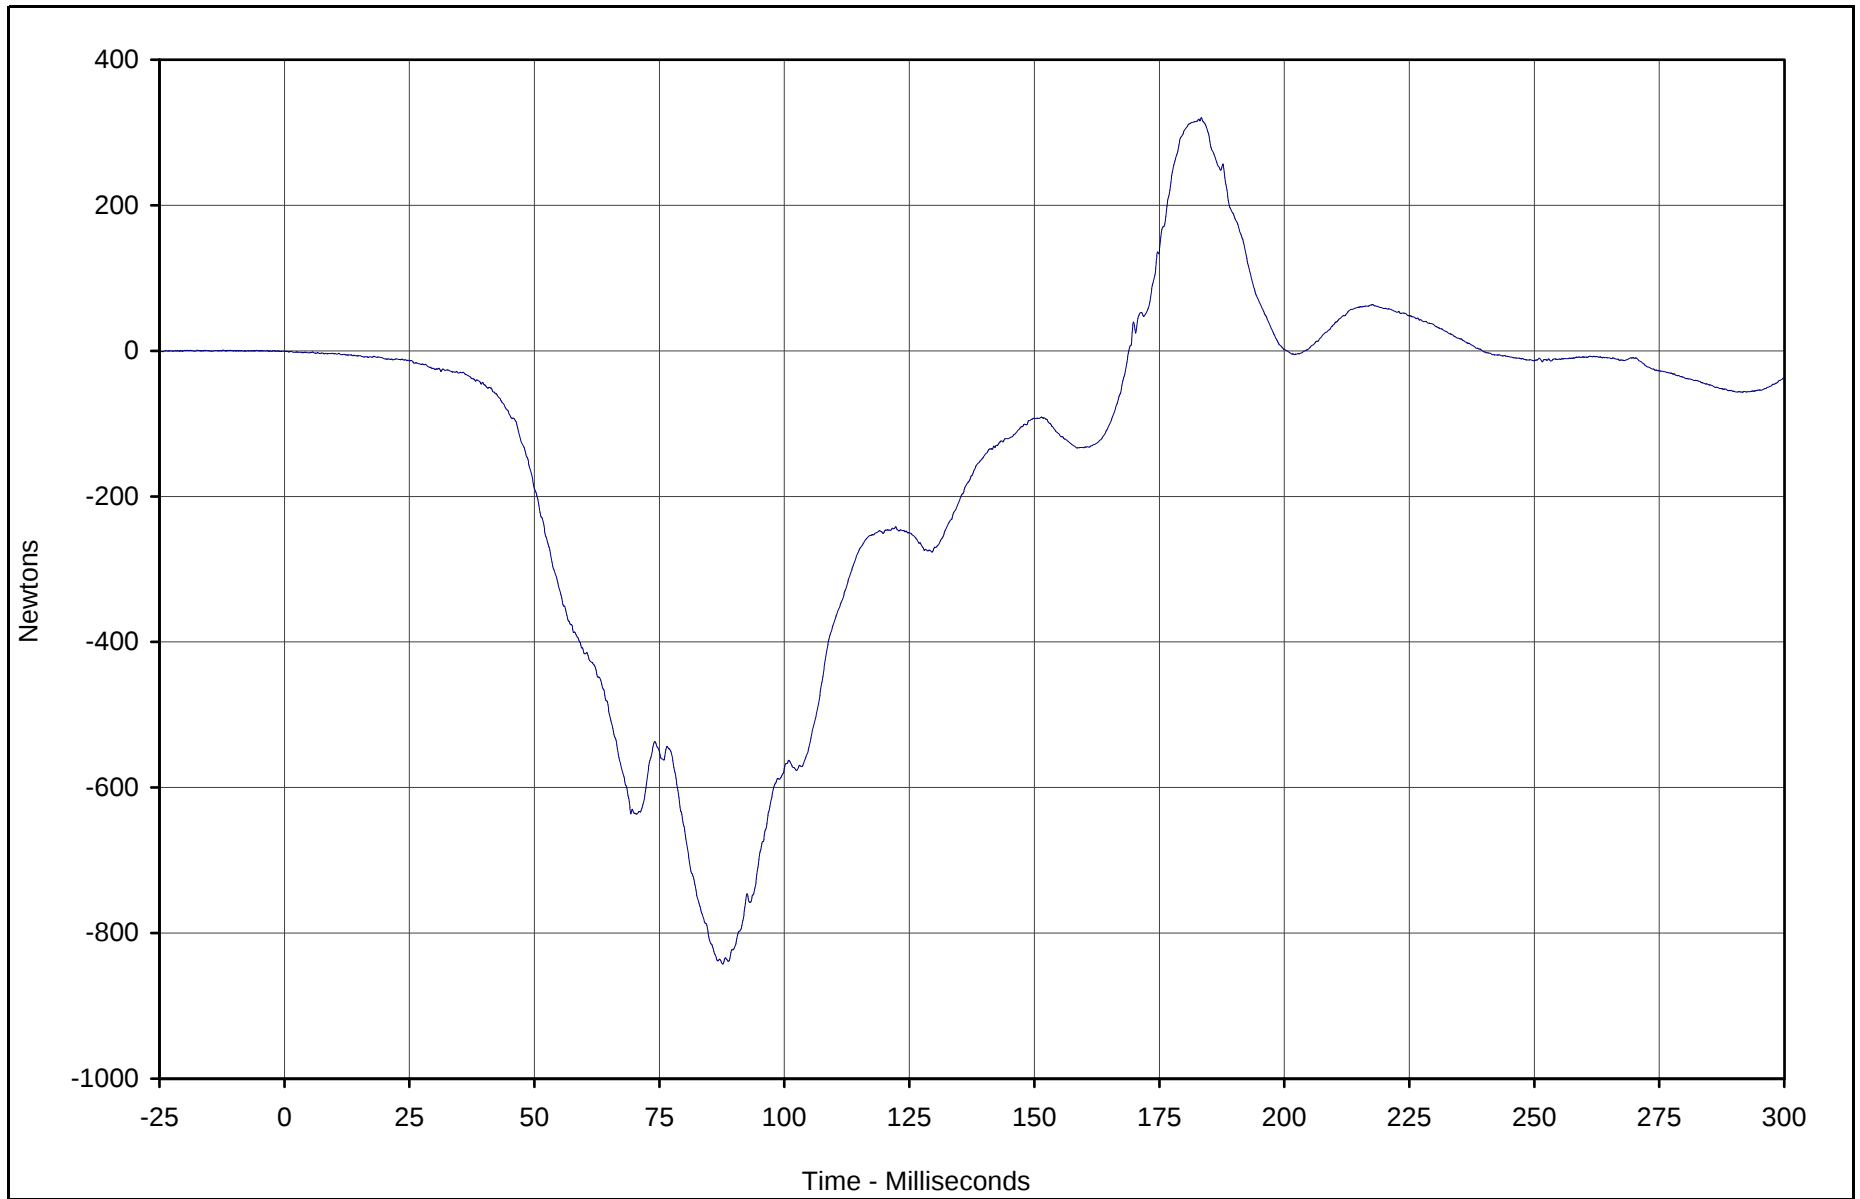

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Lower Neck Force X	143	FIL	Newtons	320.4	183.4	-842.4	87.7	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

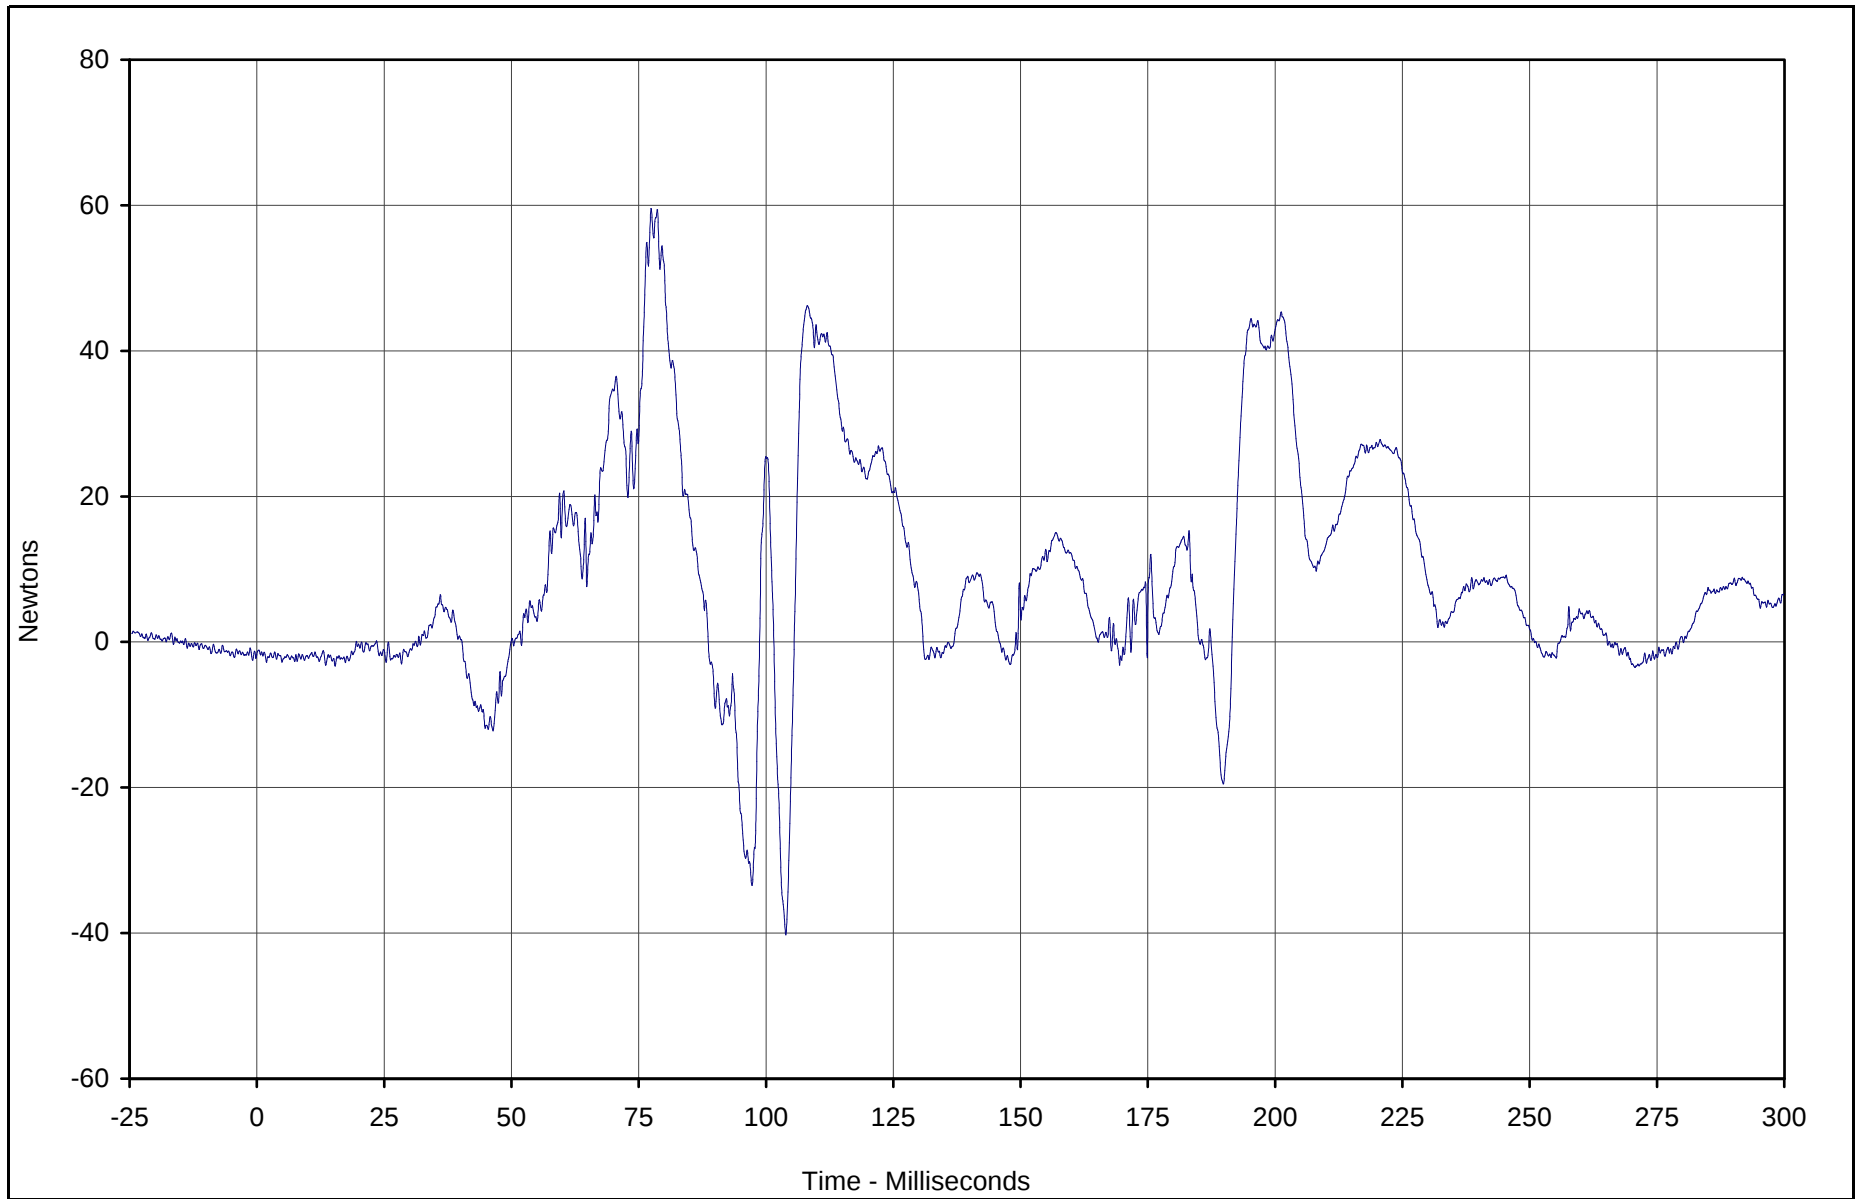

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Lower Neck Force Y	144	FIL	Newtons	59.6	77.4	-40.2	103.9	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

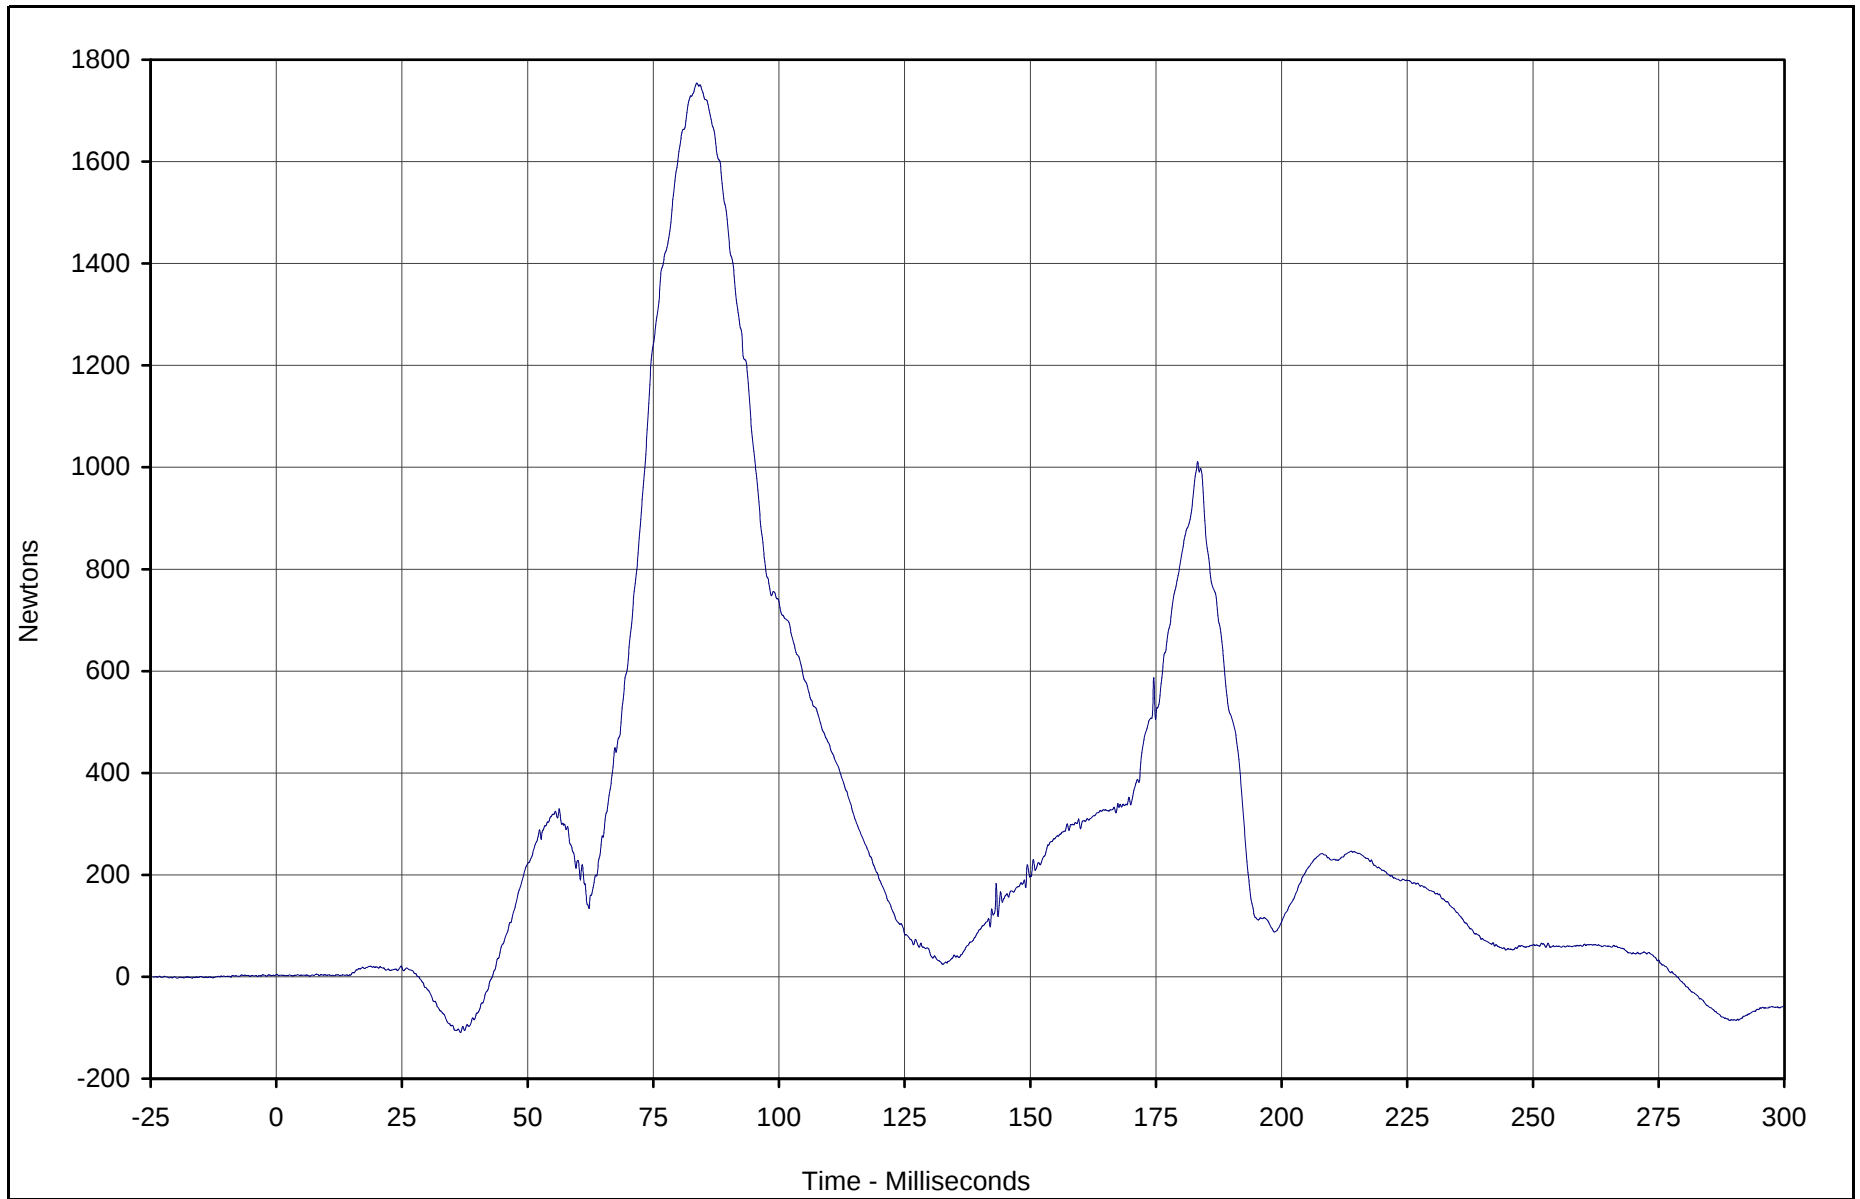

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Lower Neck Force Z	145	FIL	Newtons	1754.1	83.7	-109.4	36.7	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

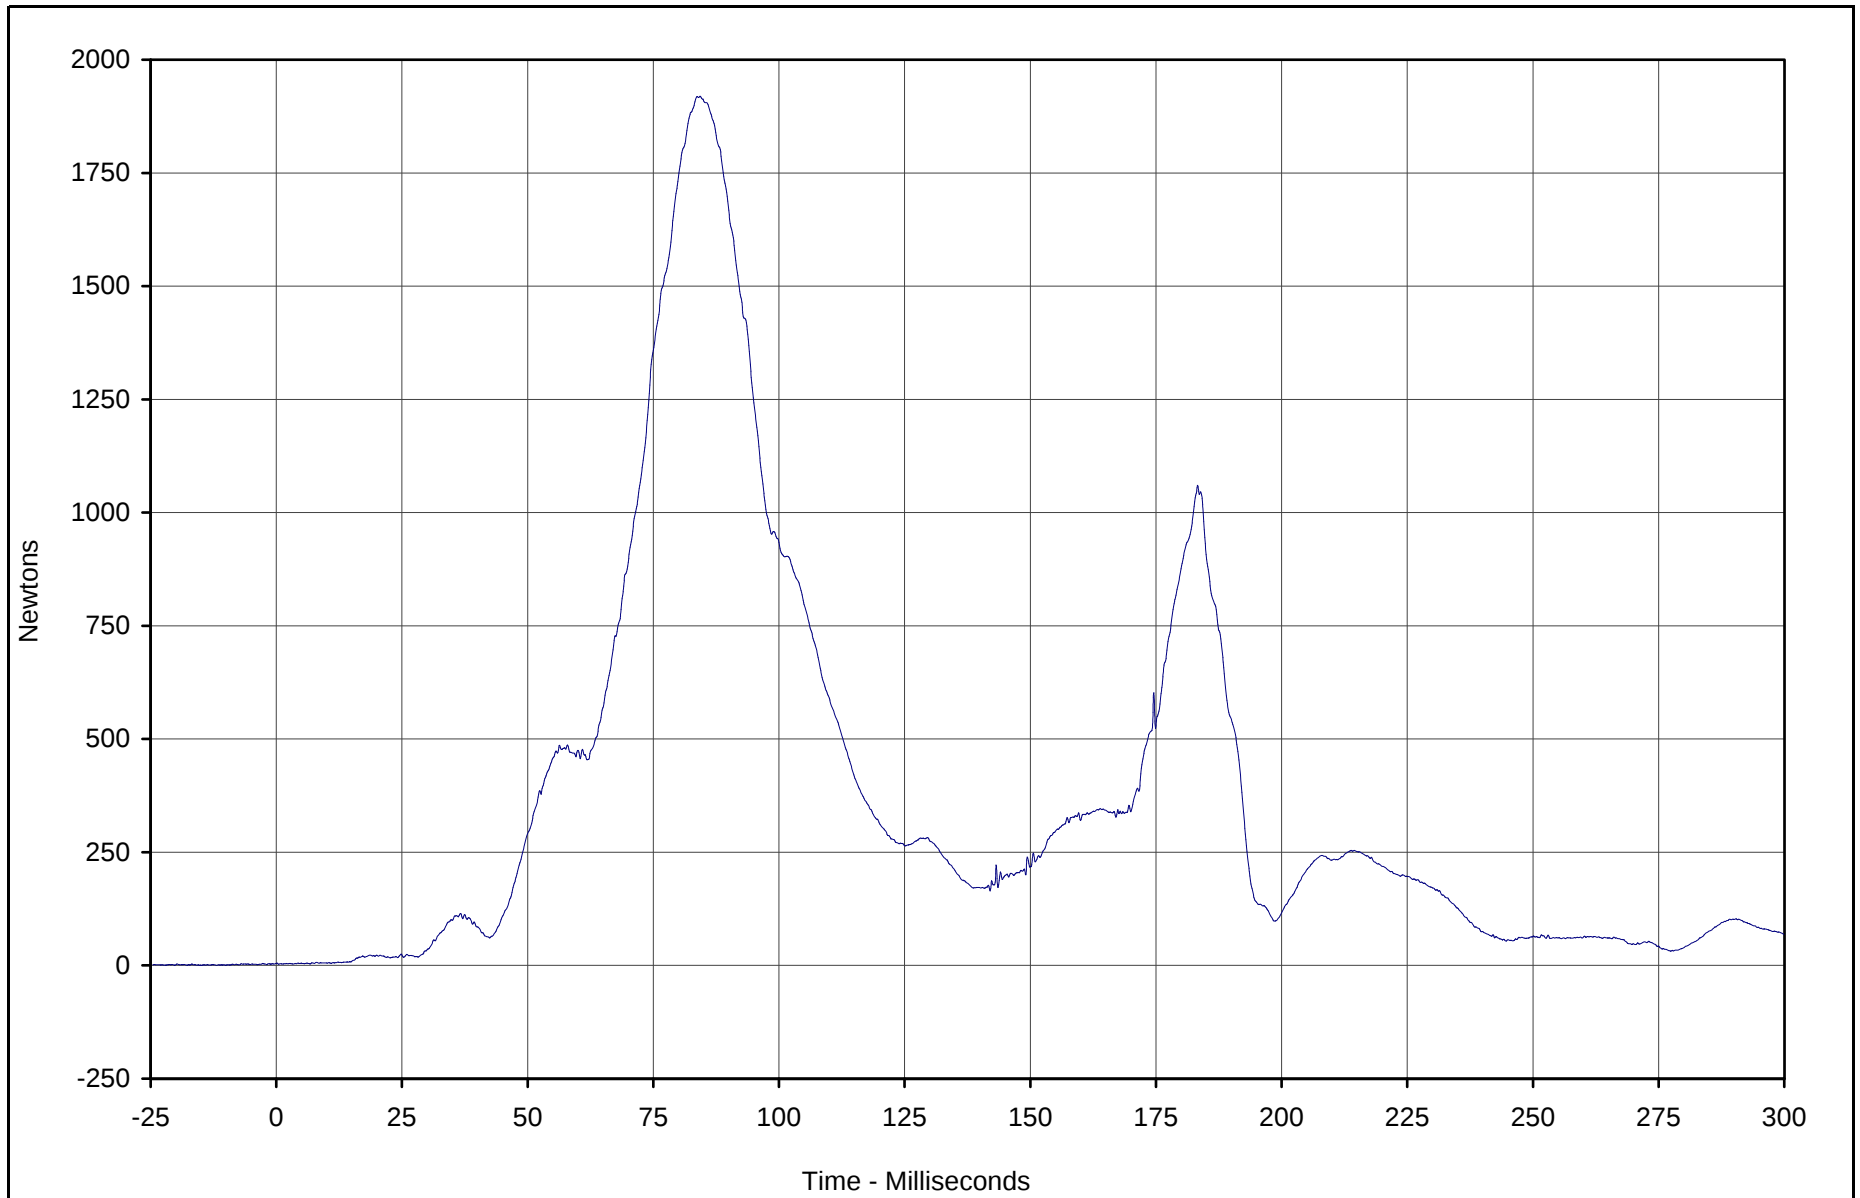

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Lower Neck Force Res.	143	RES	Newtons	1919.3	84.3	2.5	0.5	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

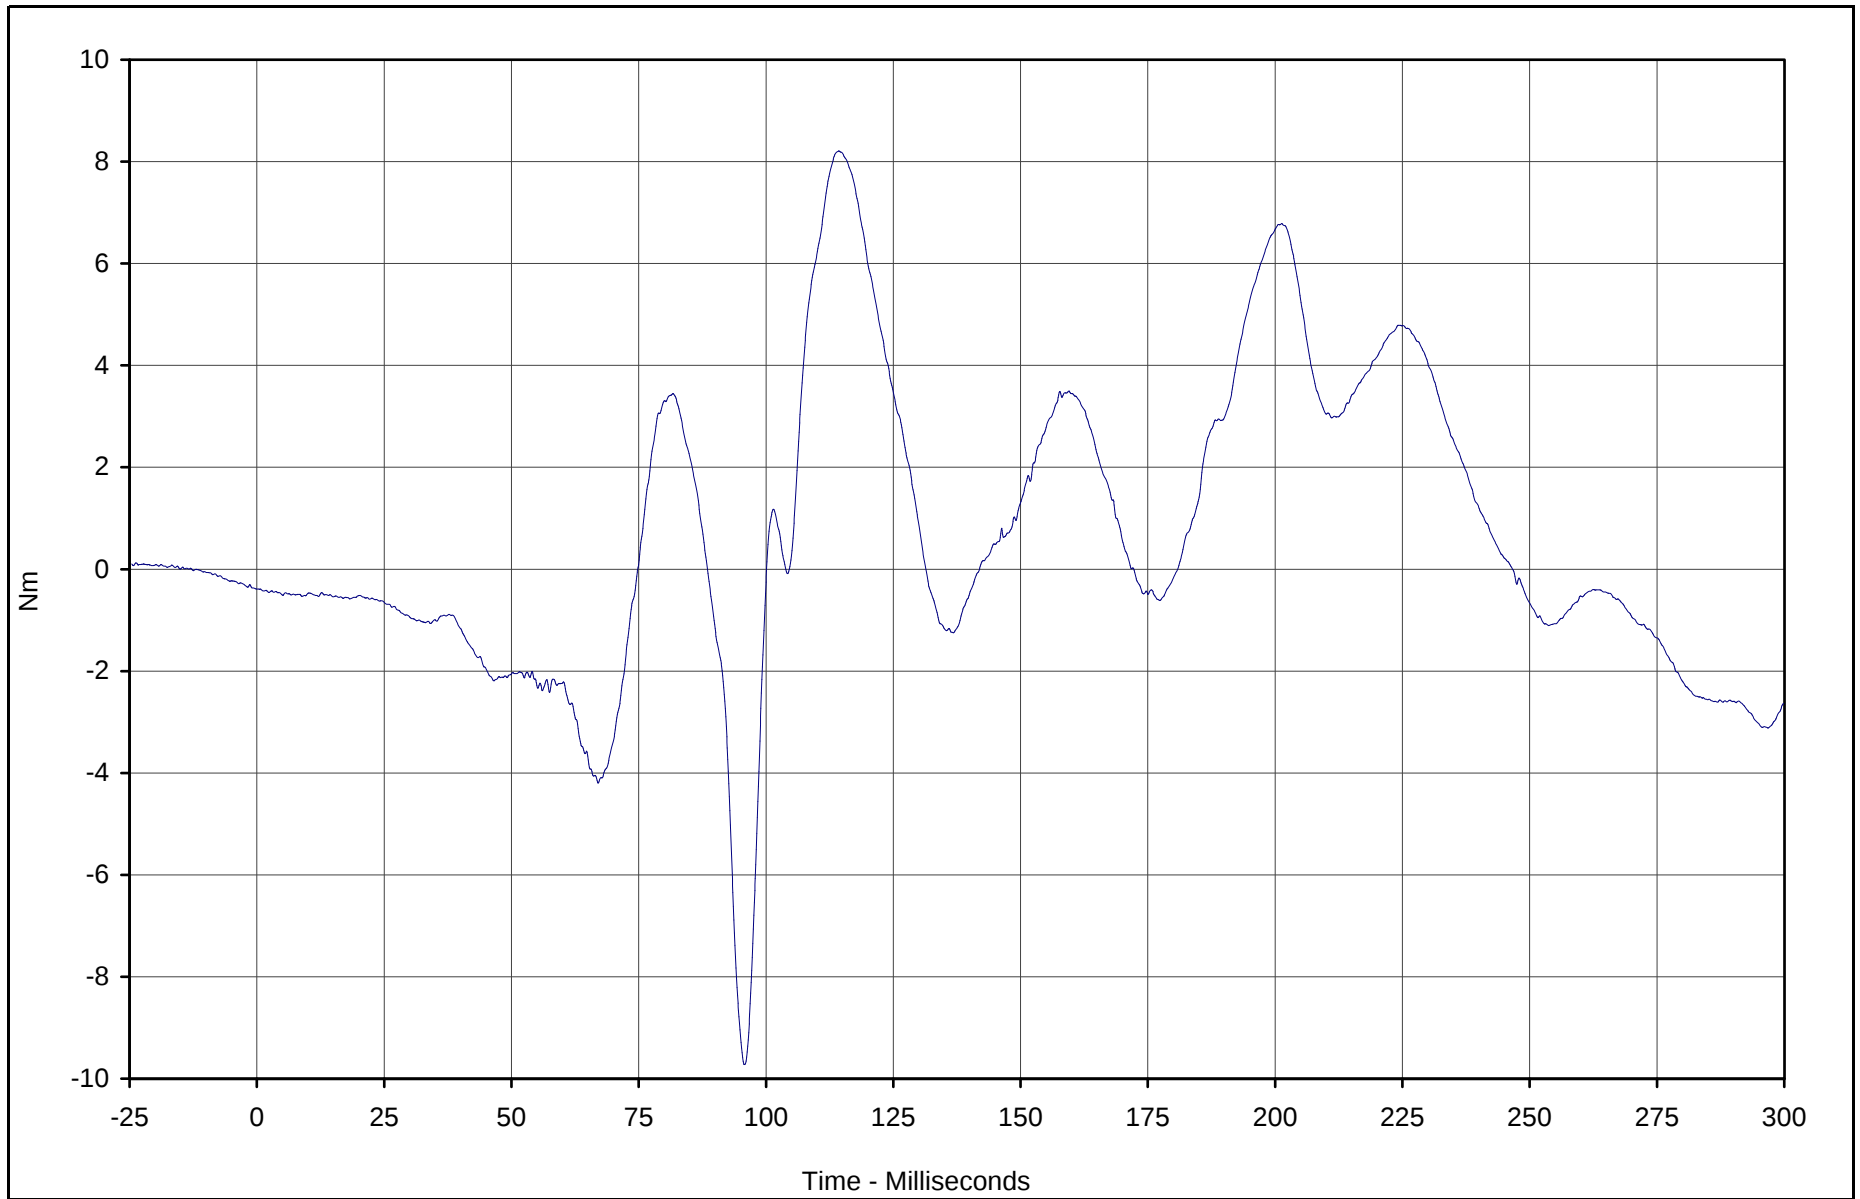

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Lower Neck Moment X	146	FIL	Nm	8.2	114.3	-9.7	95.8	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

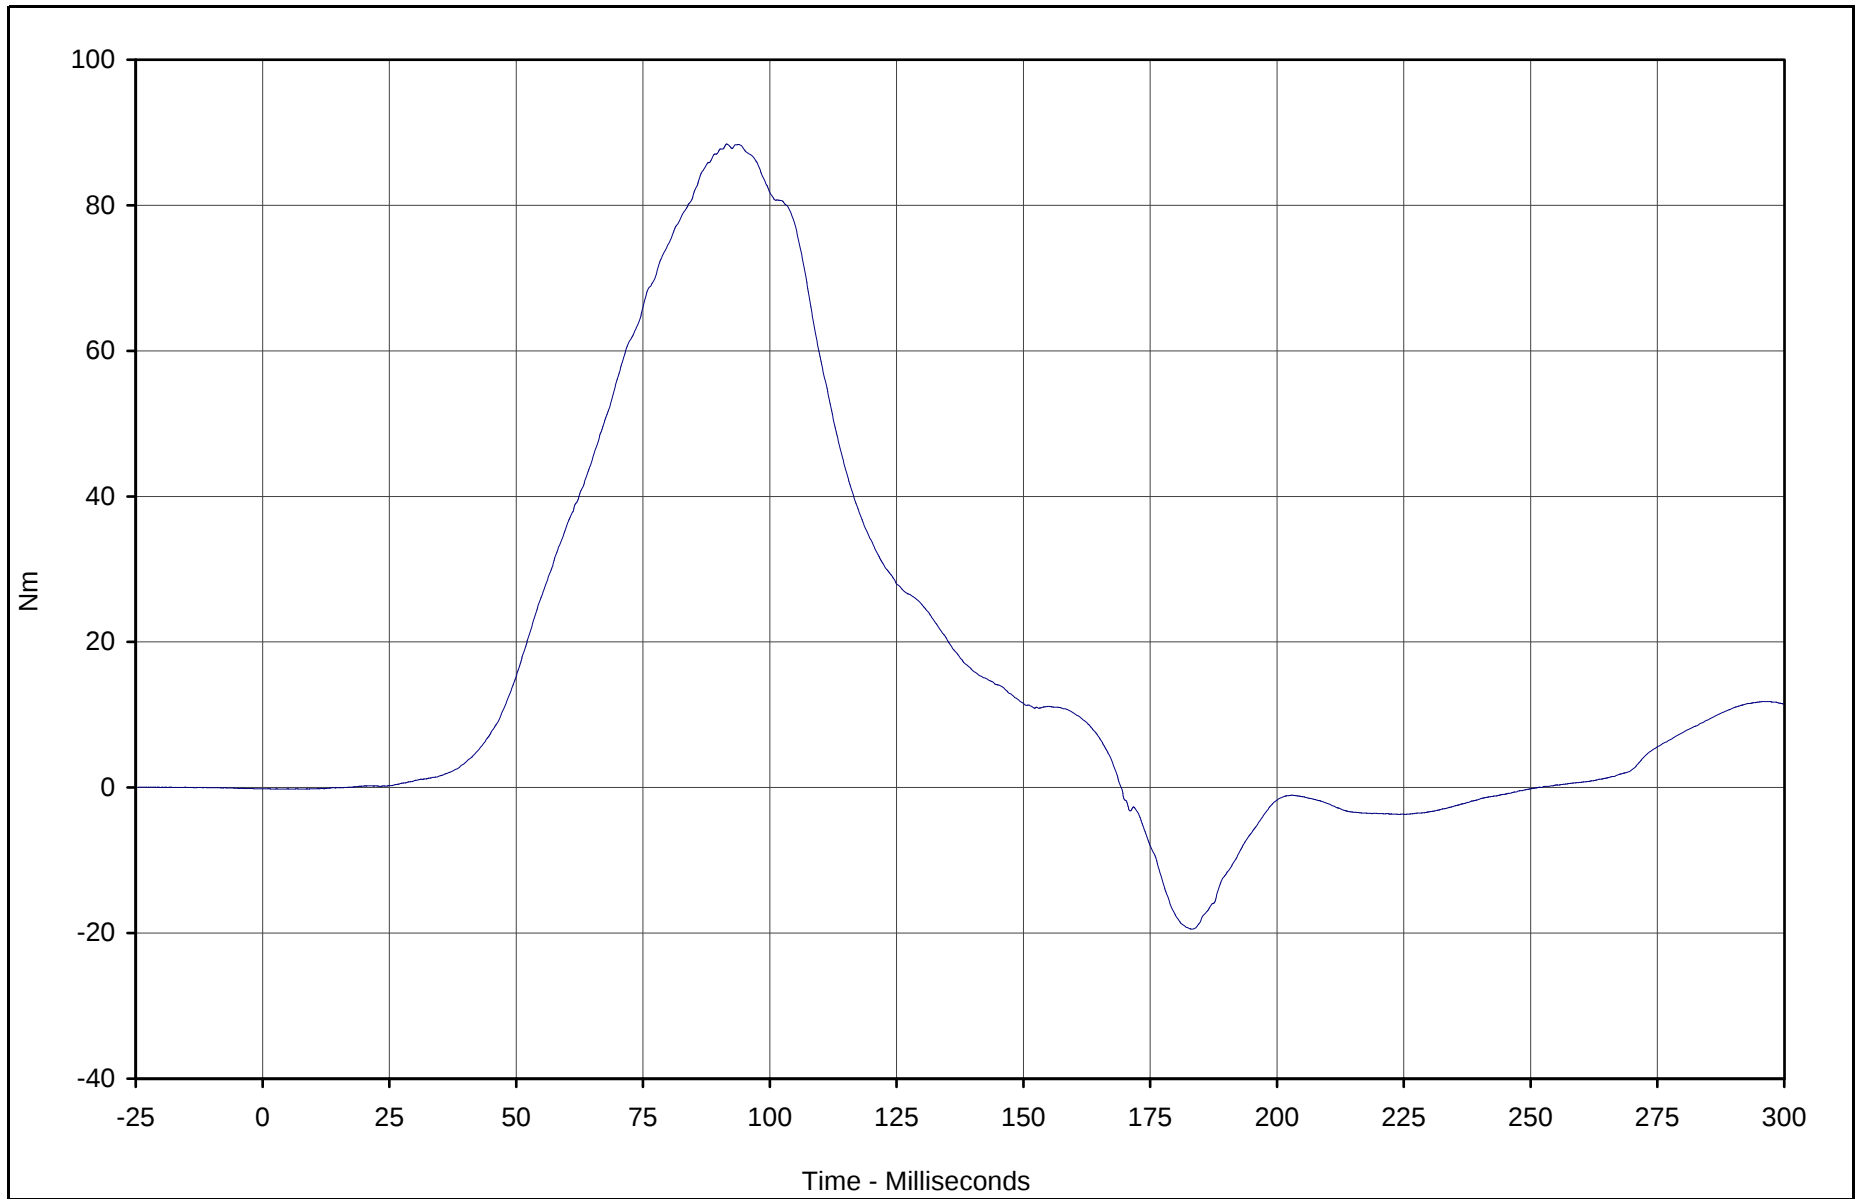

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Lower Neck Moment Y	147	FIL	Nm	88.4	91.5	-19.5	183.3	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

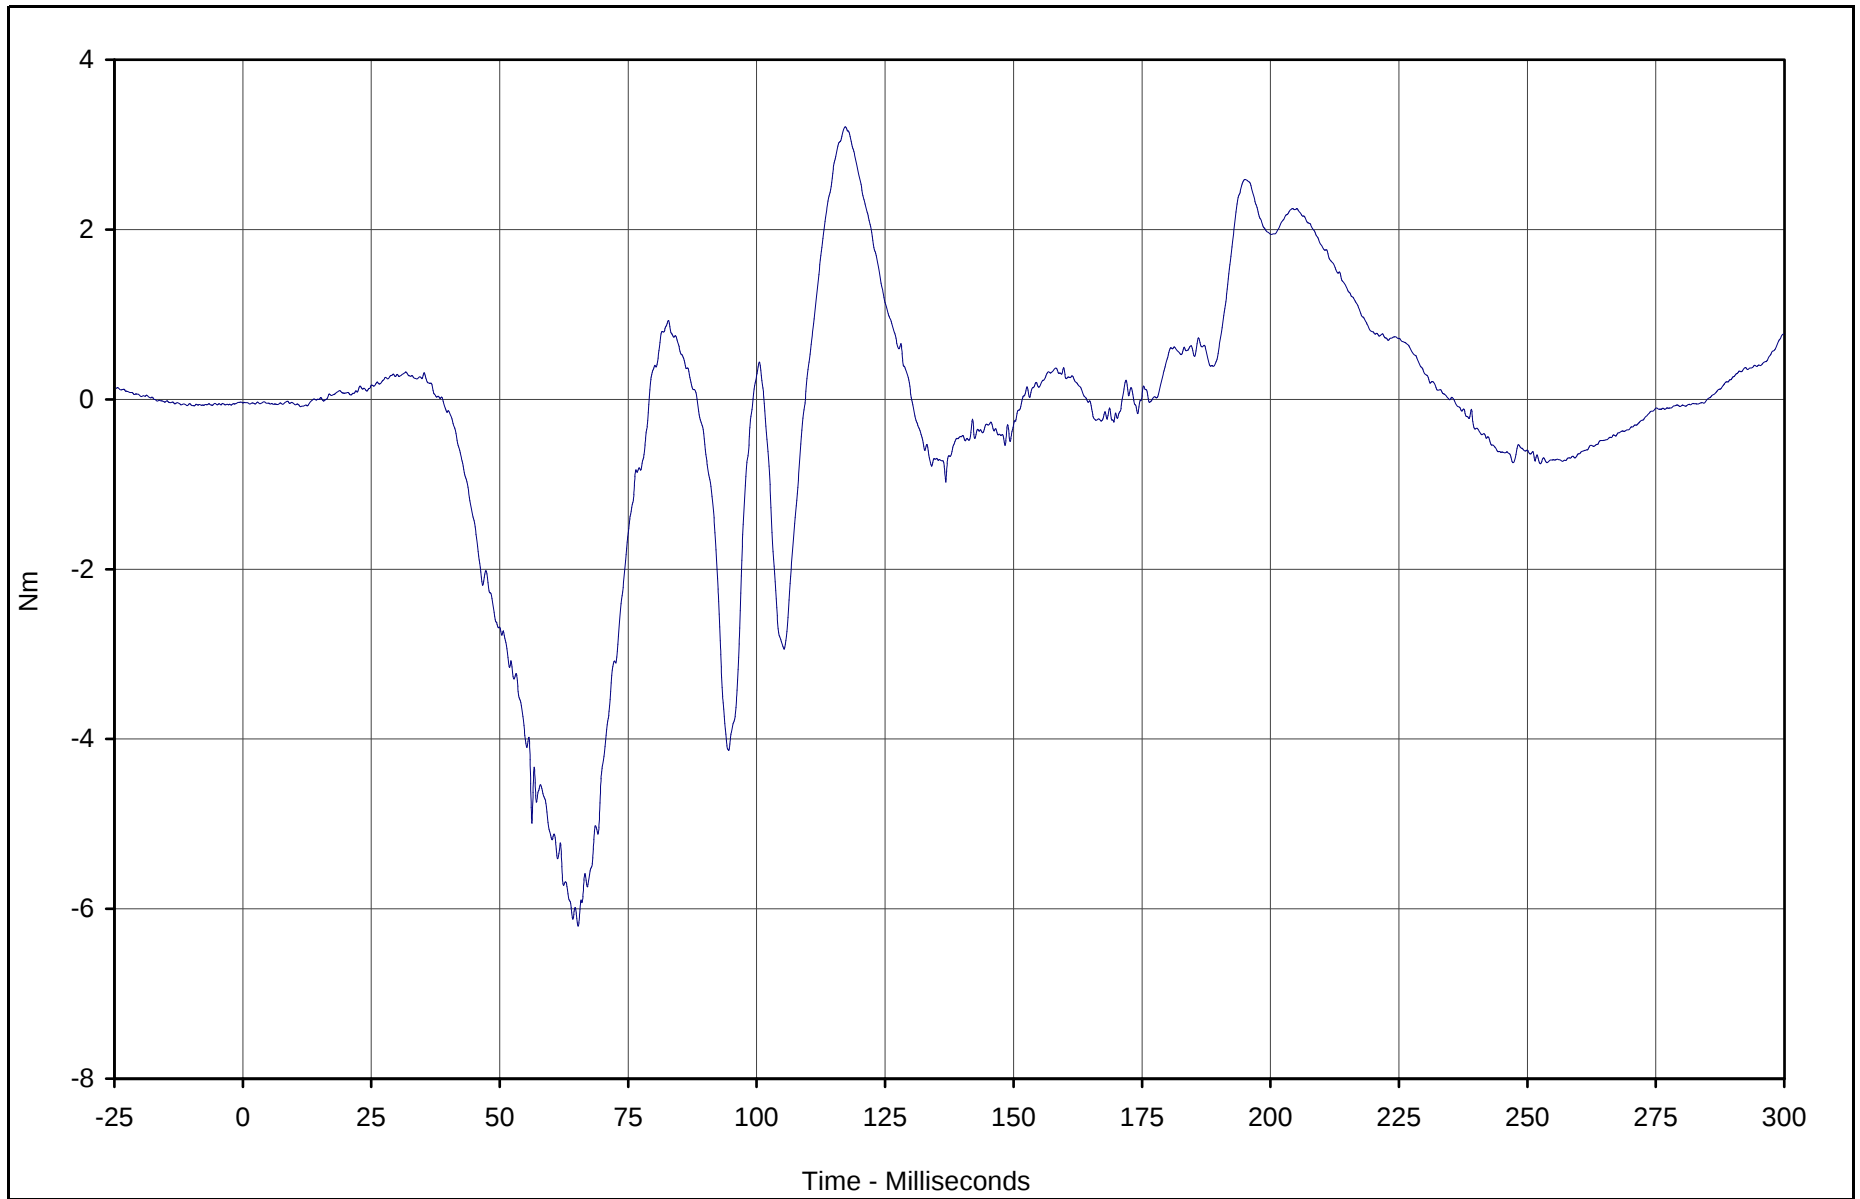

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Lower Neck Moment Z	148	FIL	Nm	3.2	117.3	-6.2	65.3	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

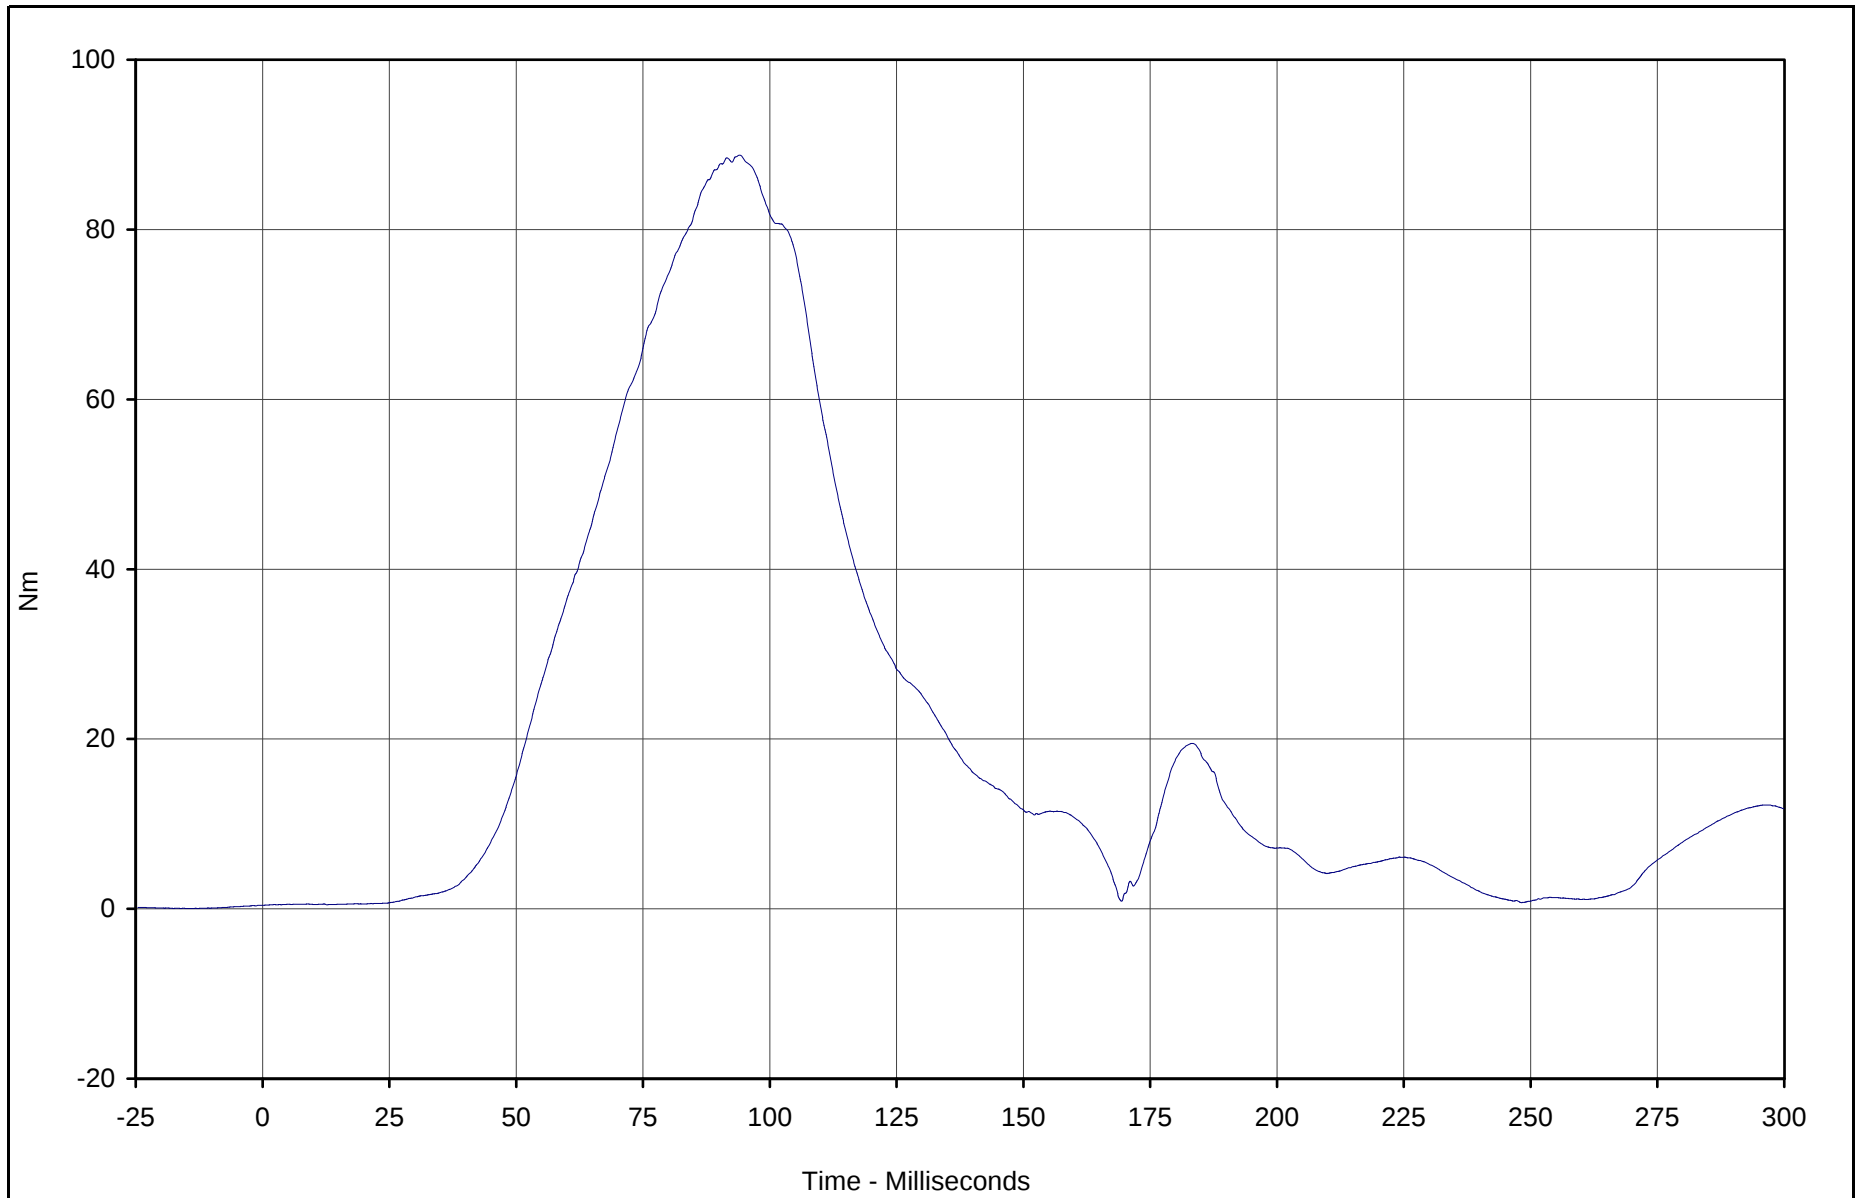

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Lower Neck Mom Res.	146	RES	Nm	88.8	94.1	0.4	0.0	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

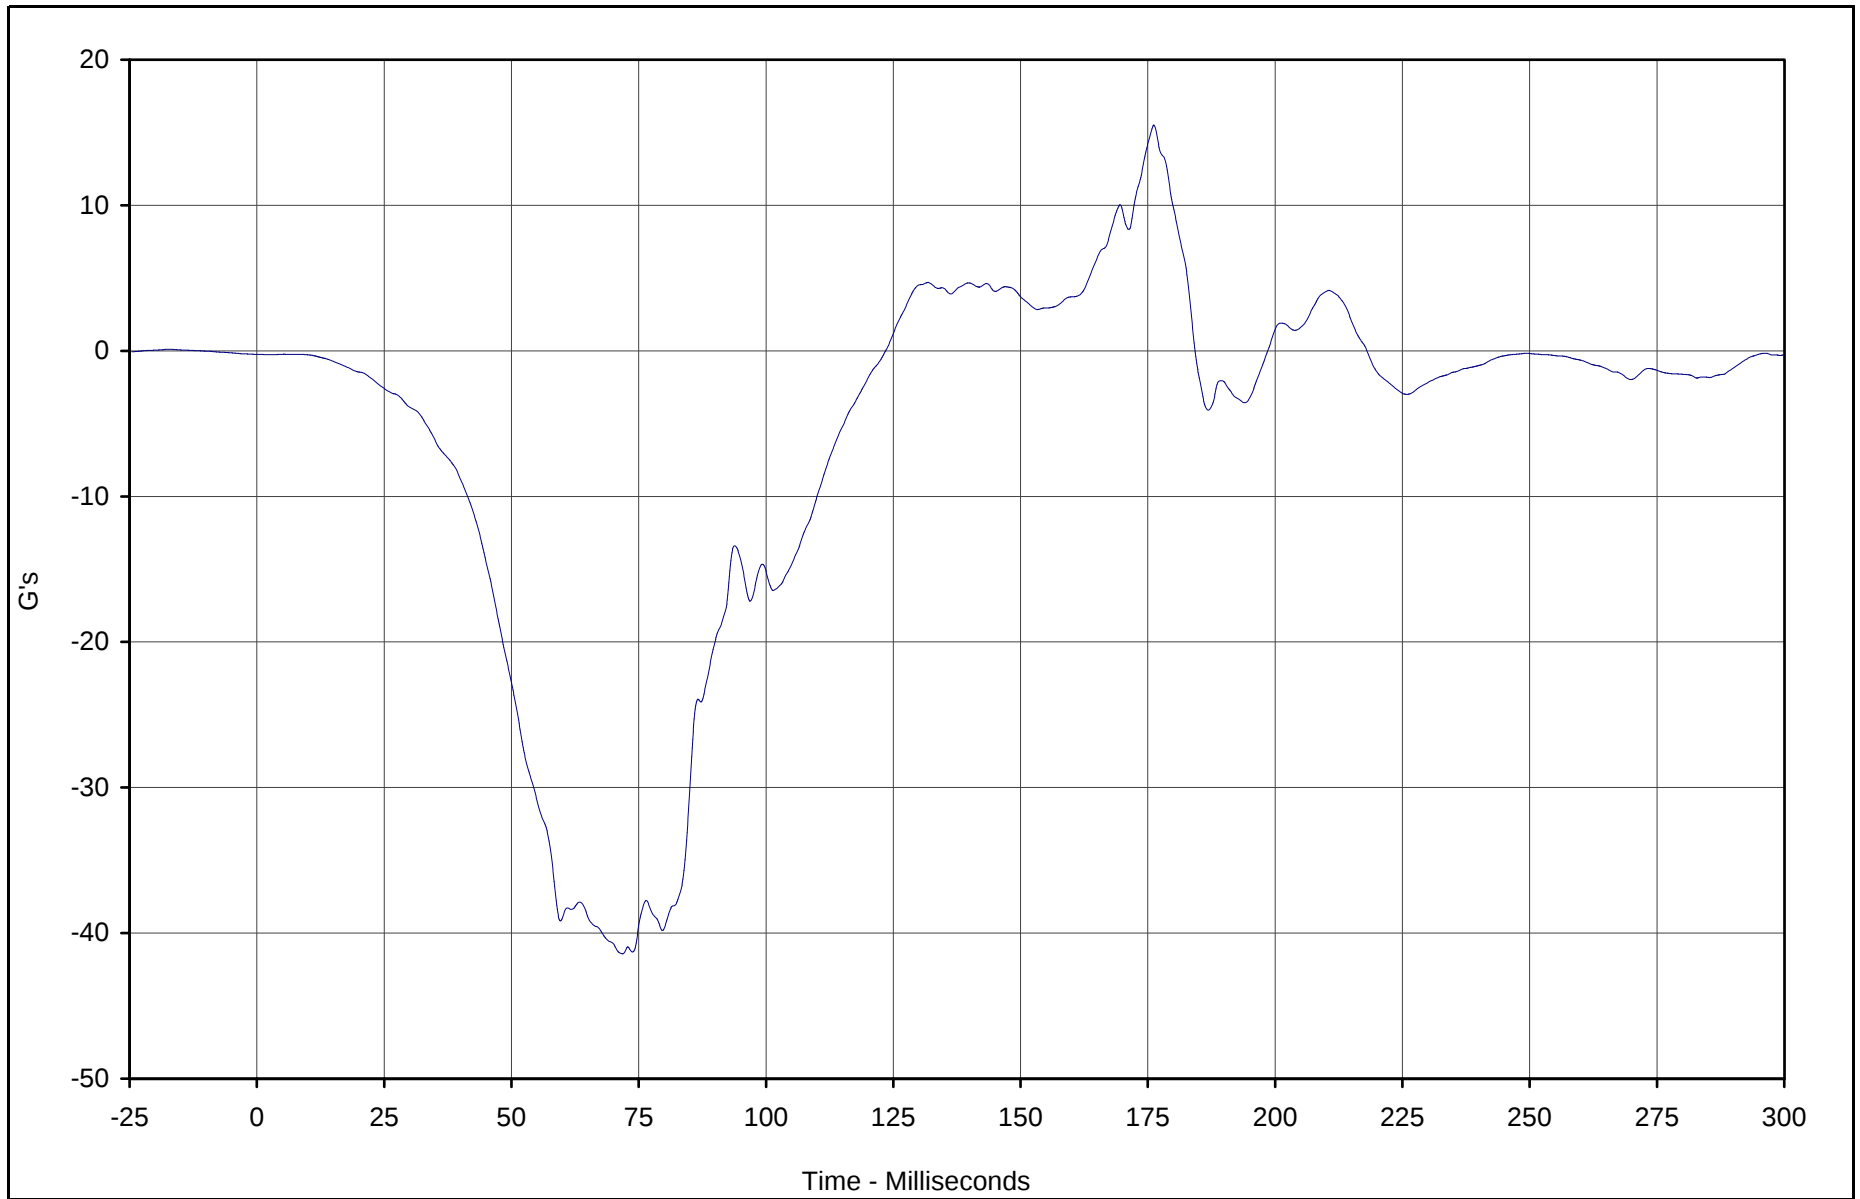

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Chest X	149	FIL	G's	15.5	176.2	-41.4	71.8	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

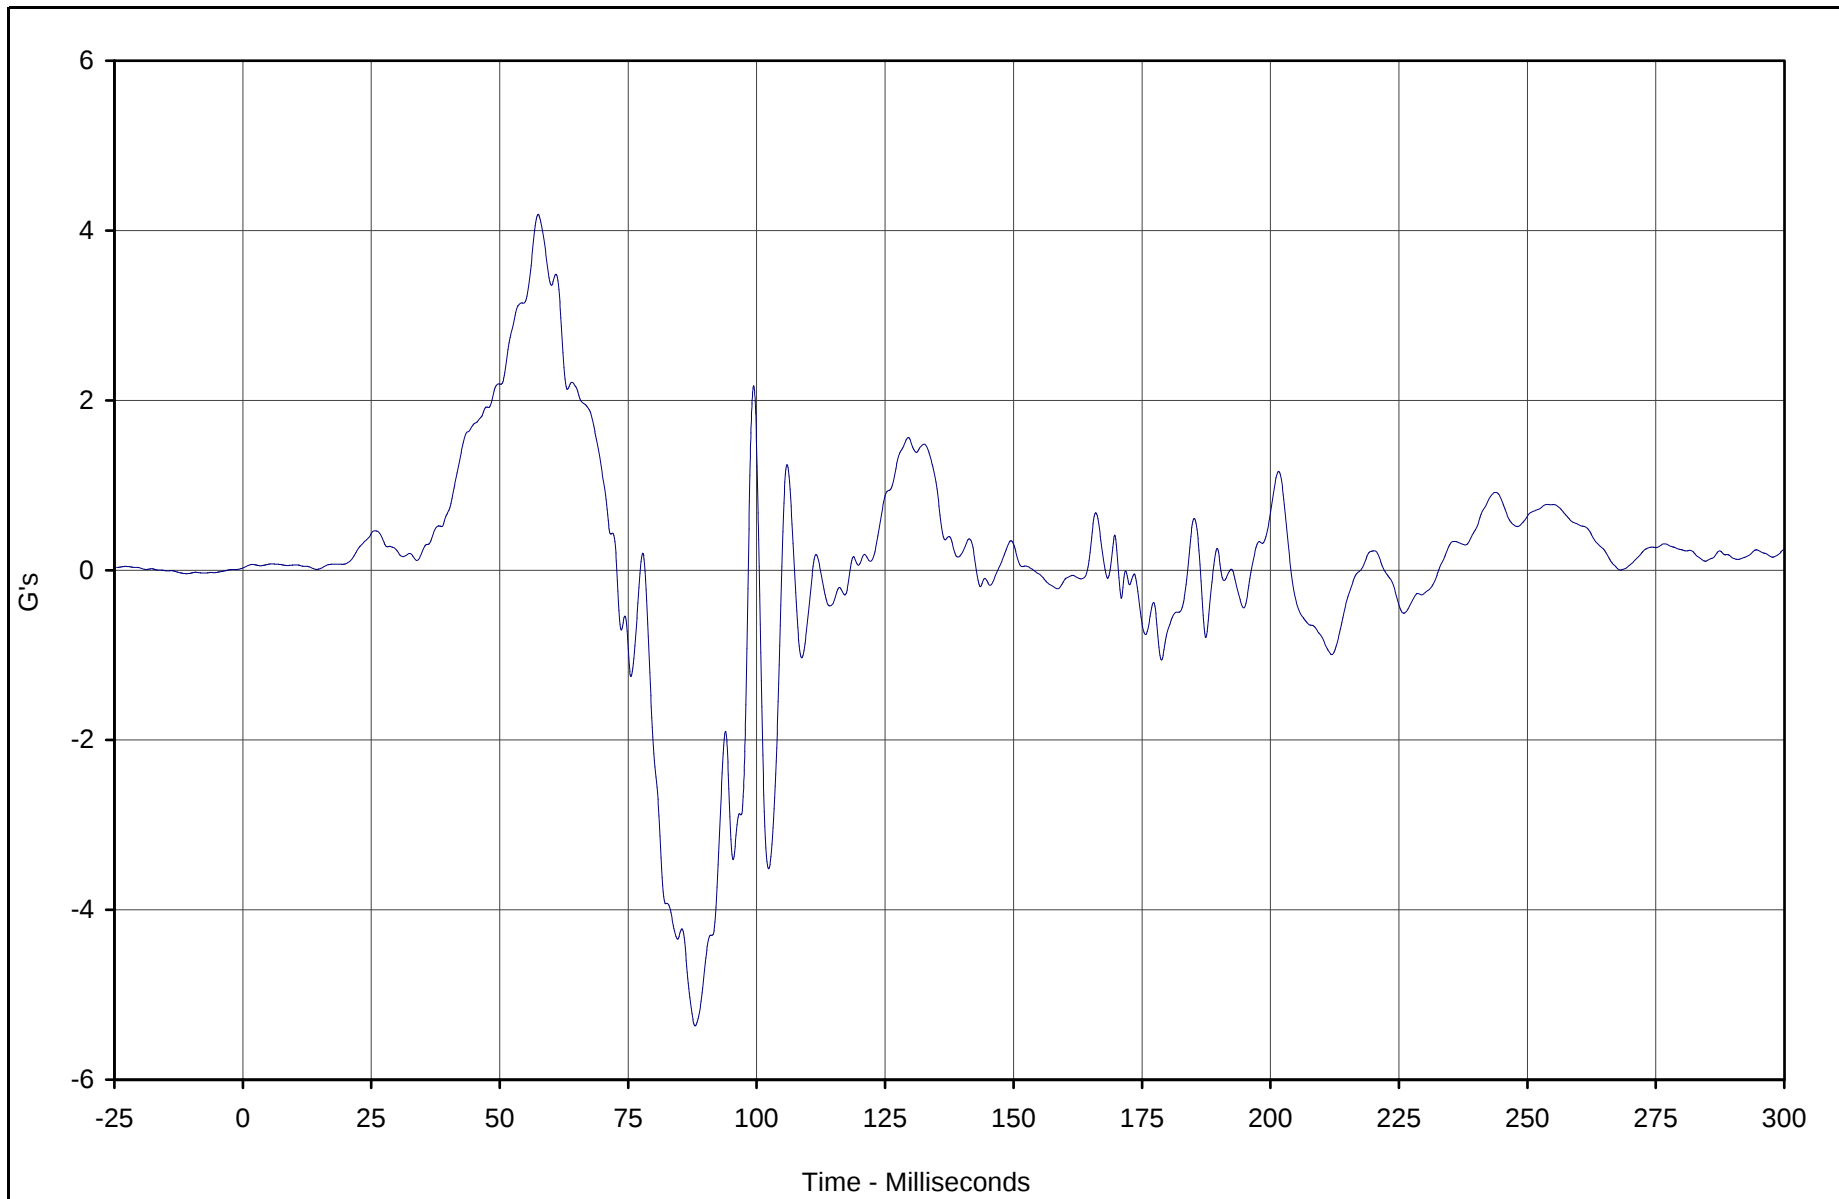

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Chest Y	150	FIL	G's	4.2	57.5	-5.4	88.0	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

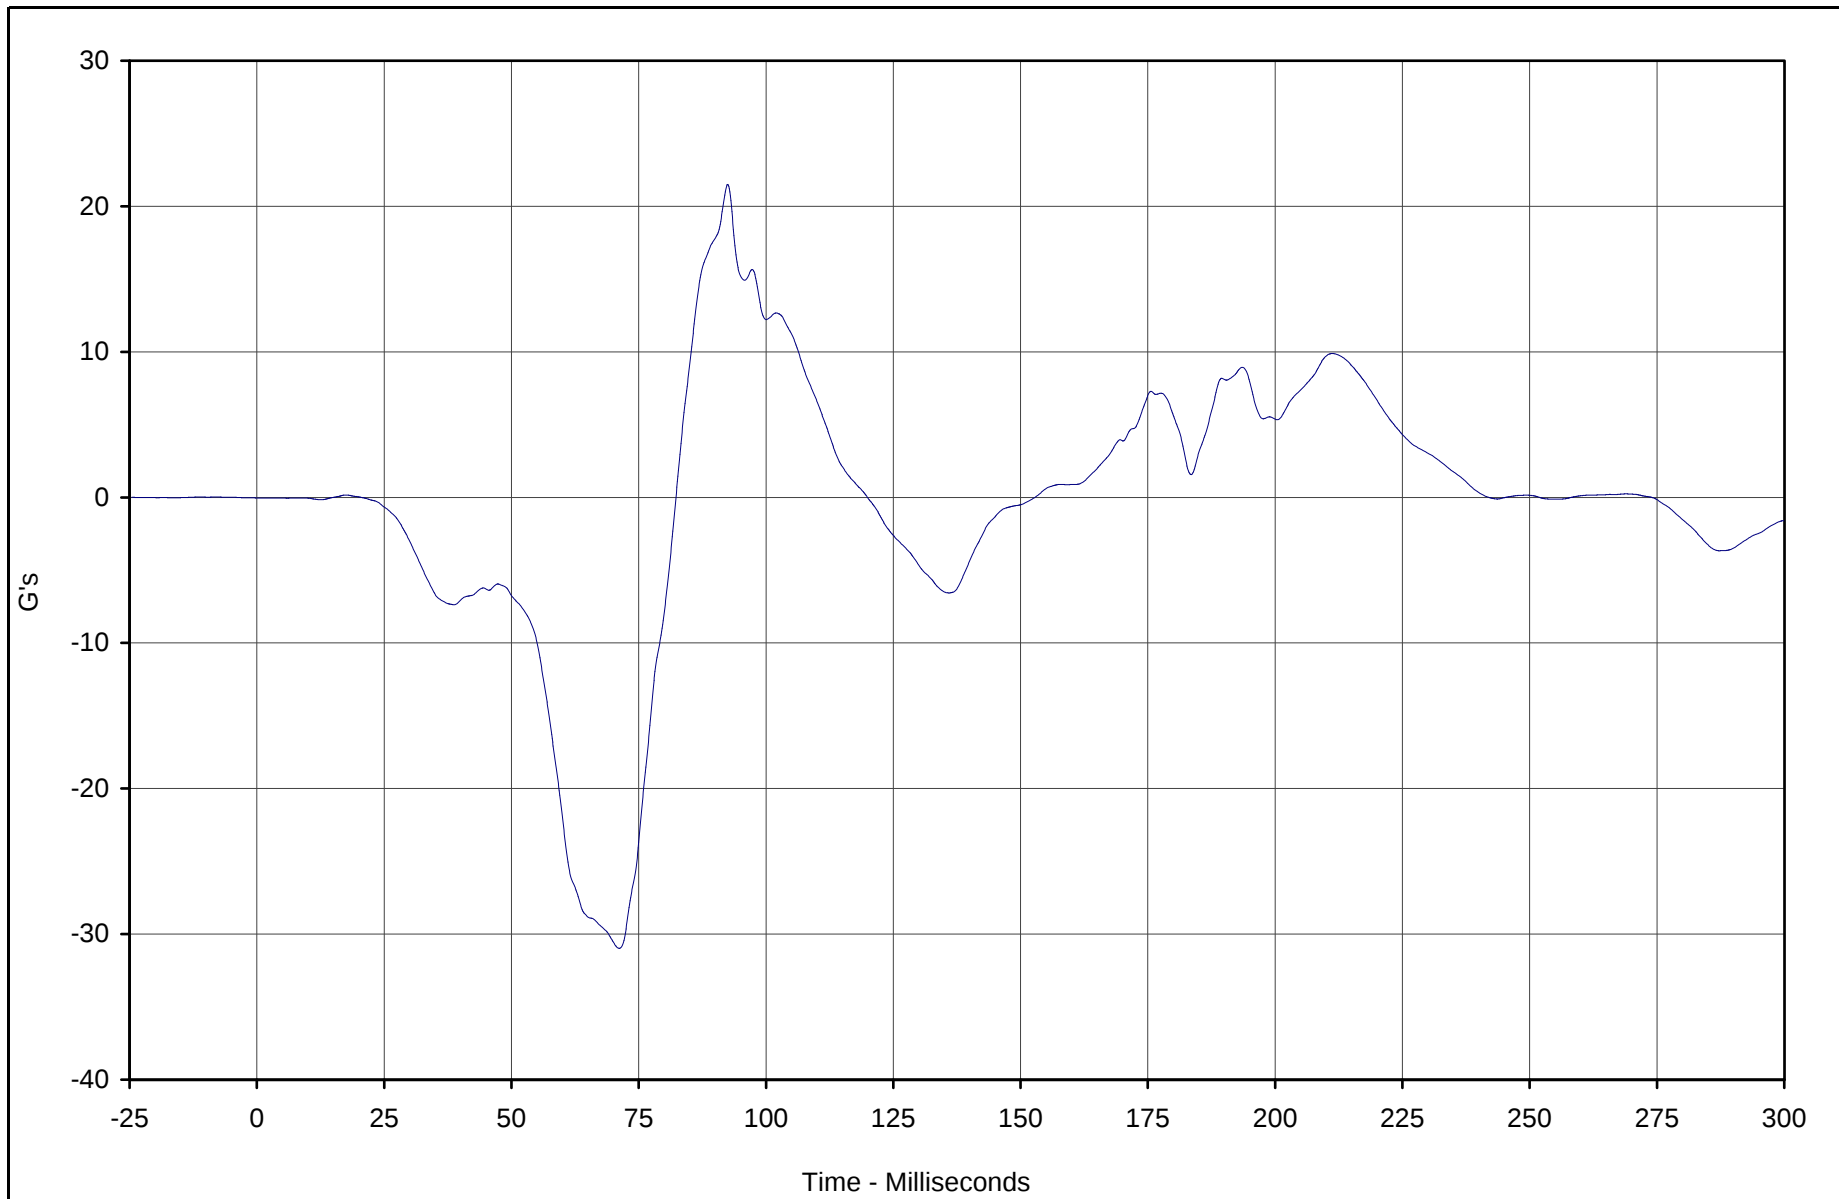

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Chest Z	151	FIL	G's	21.5	92.5	-31.0	71.2	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

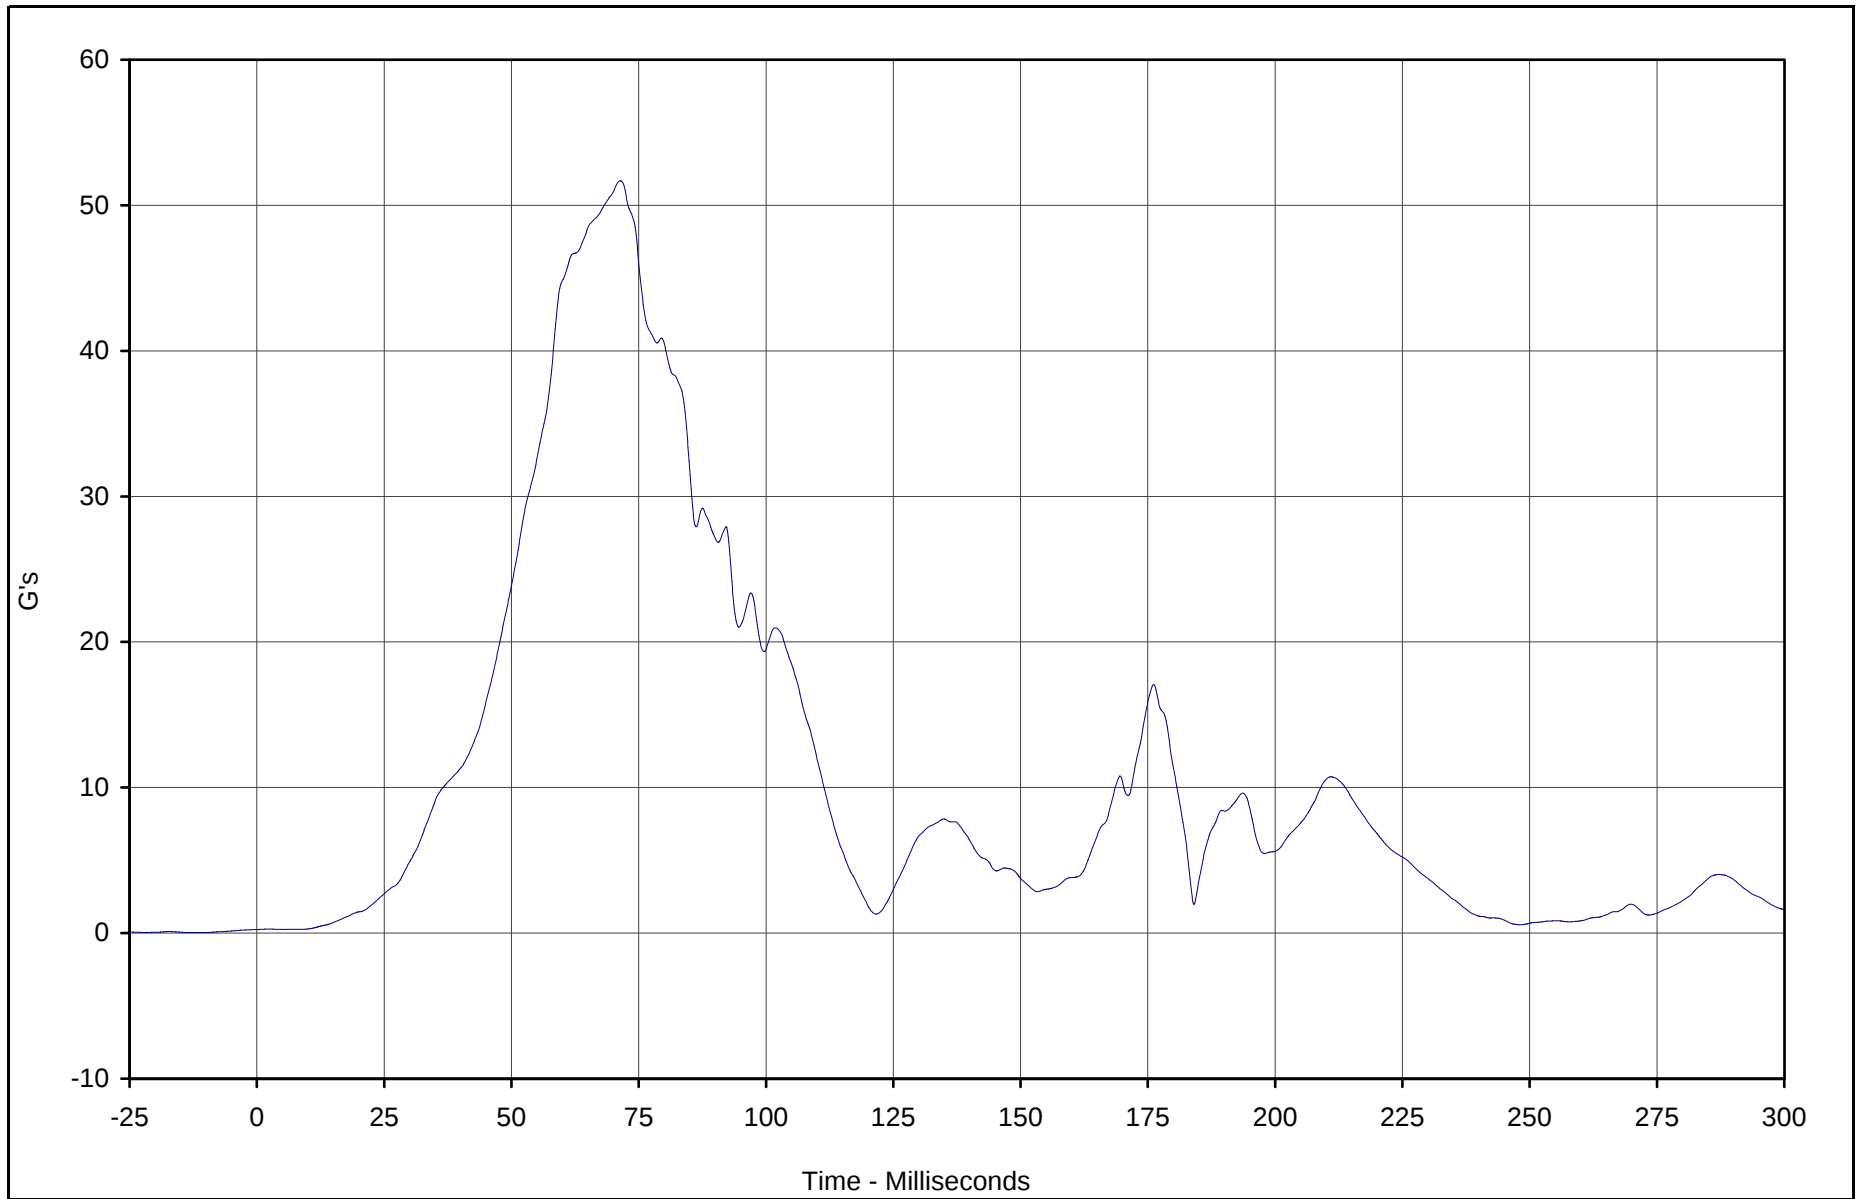

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Chest Resultant	149	RES	G's	51.7	71.4	0.2	0.0	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

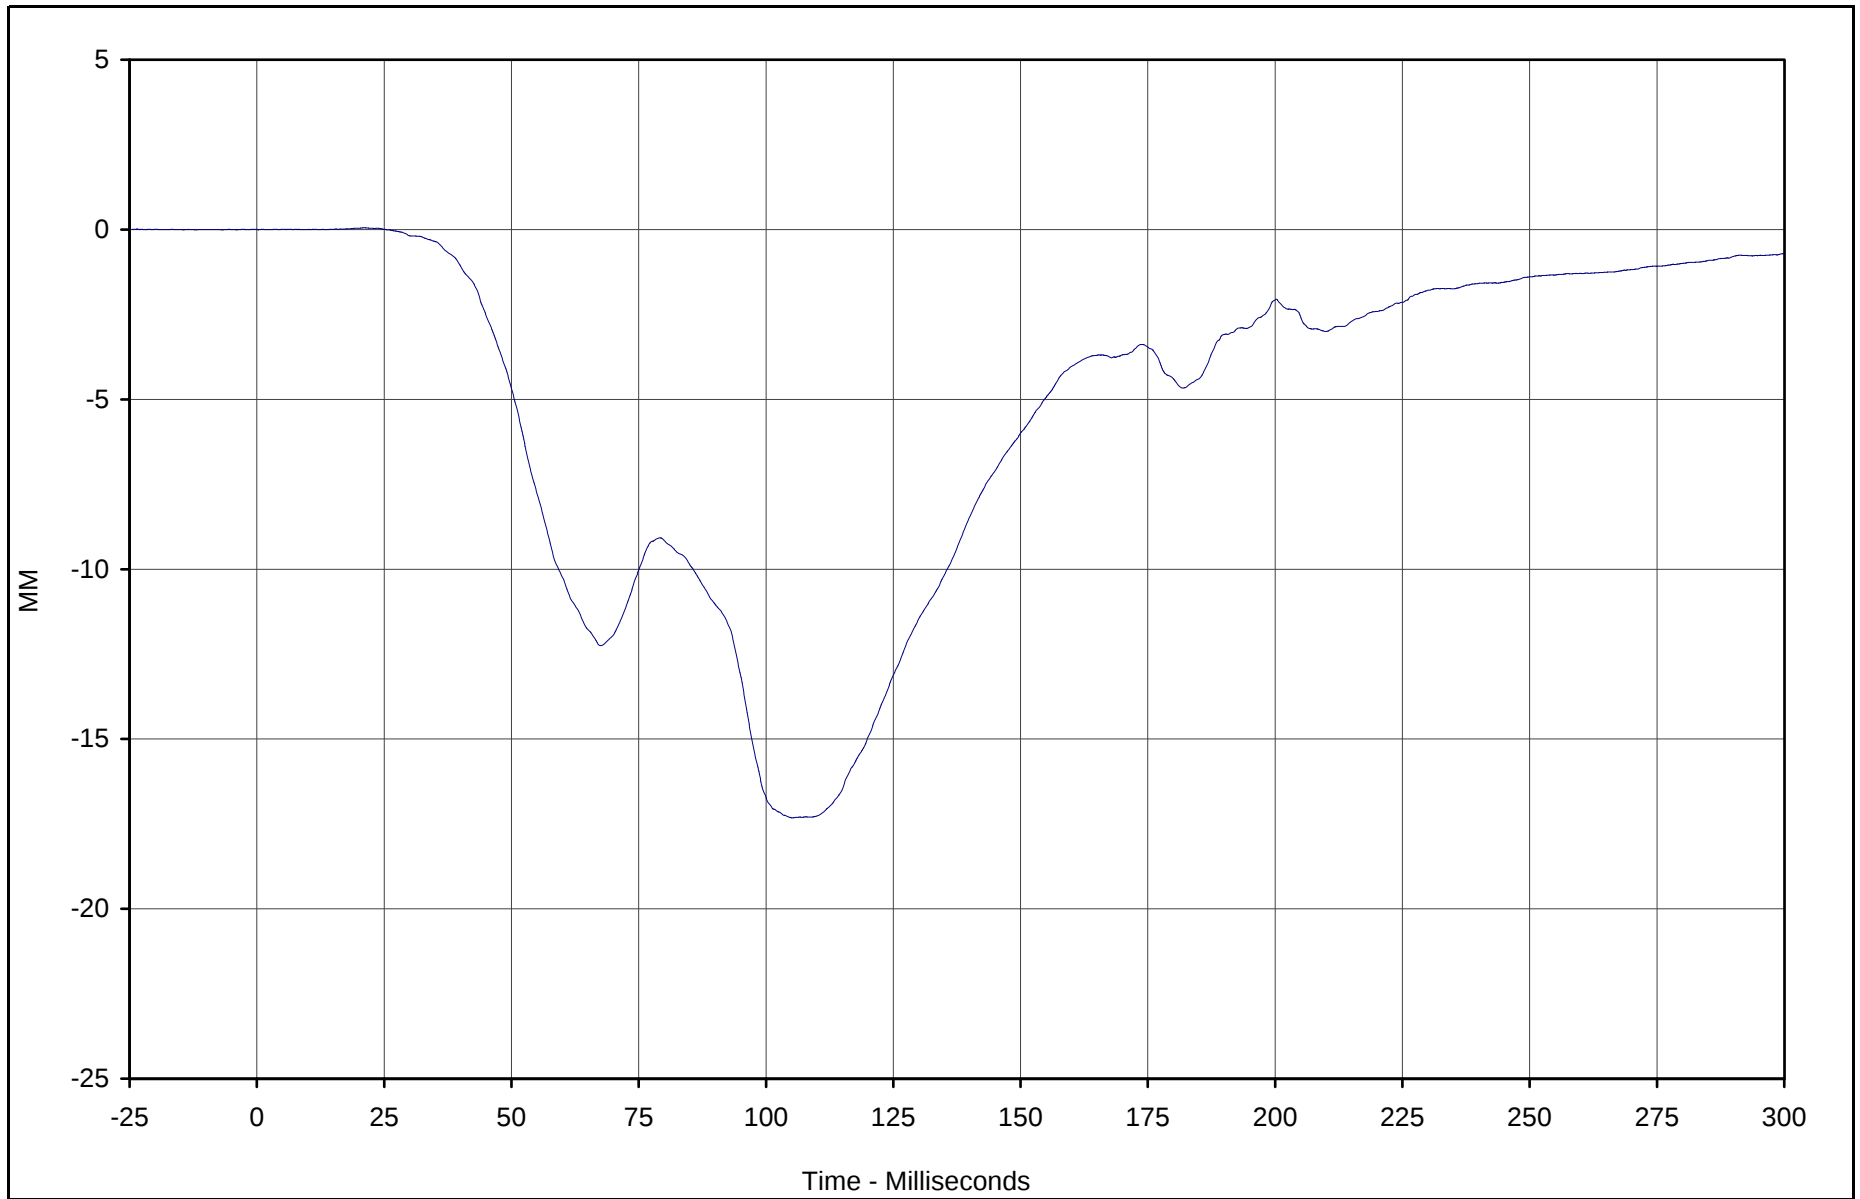

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Chest Deflection	152	FIL	MM	0.1	21.1	-17.3	105.2	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

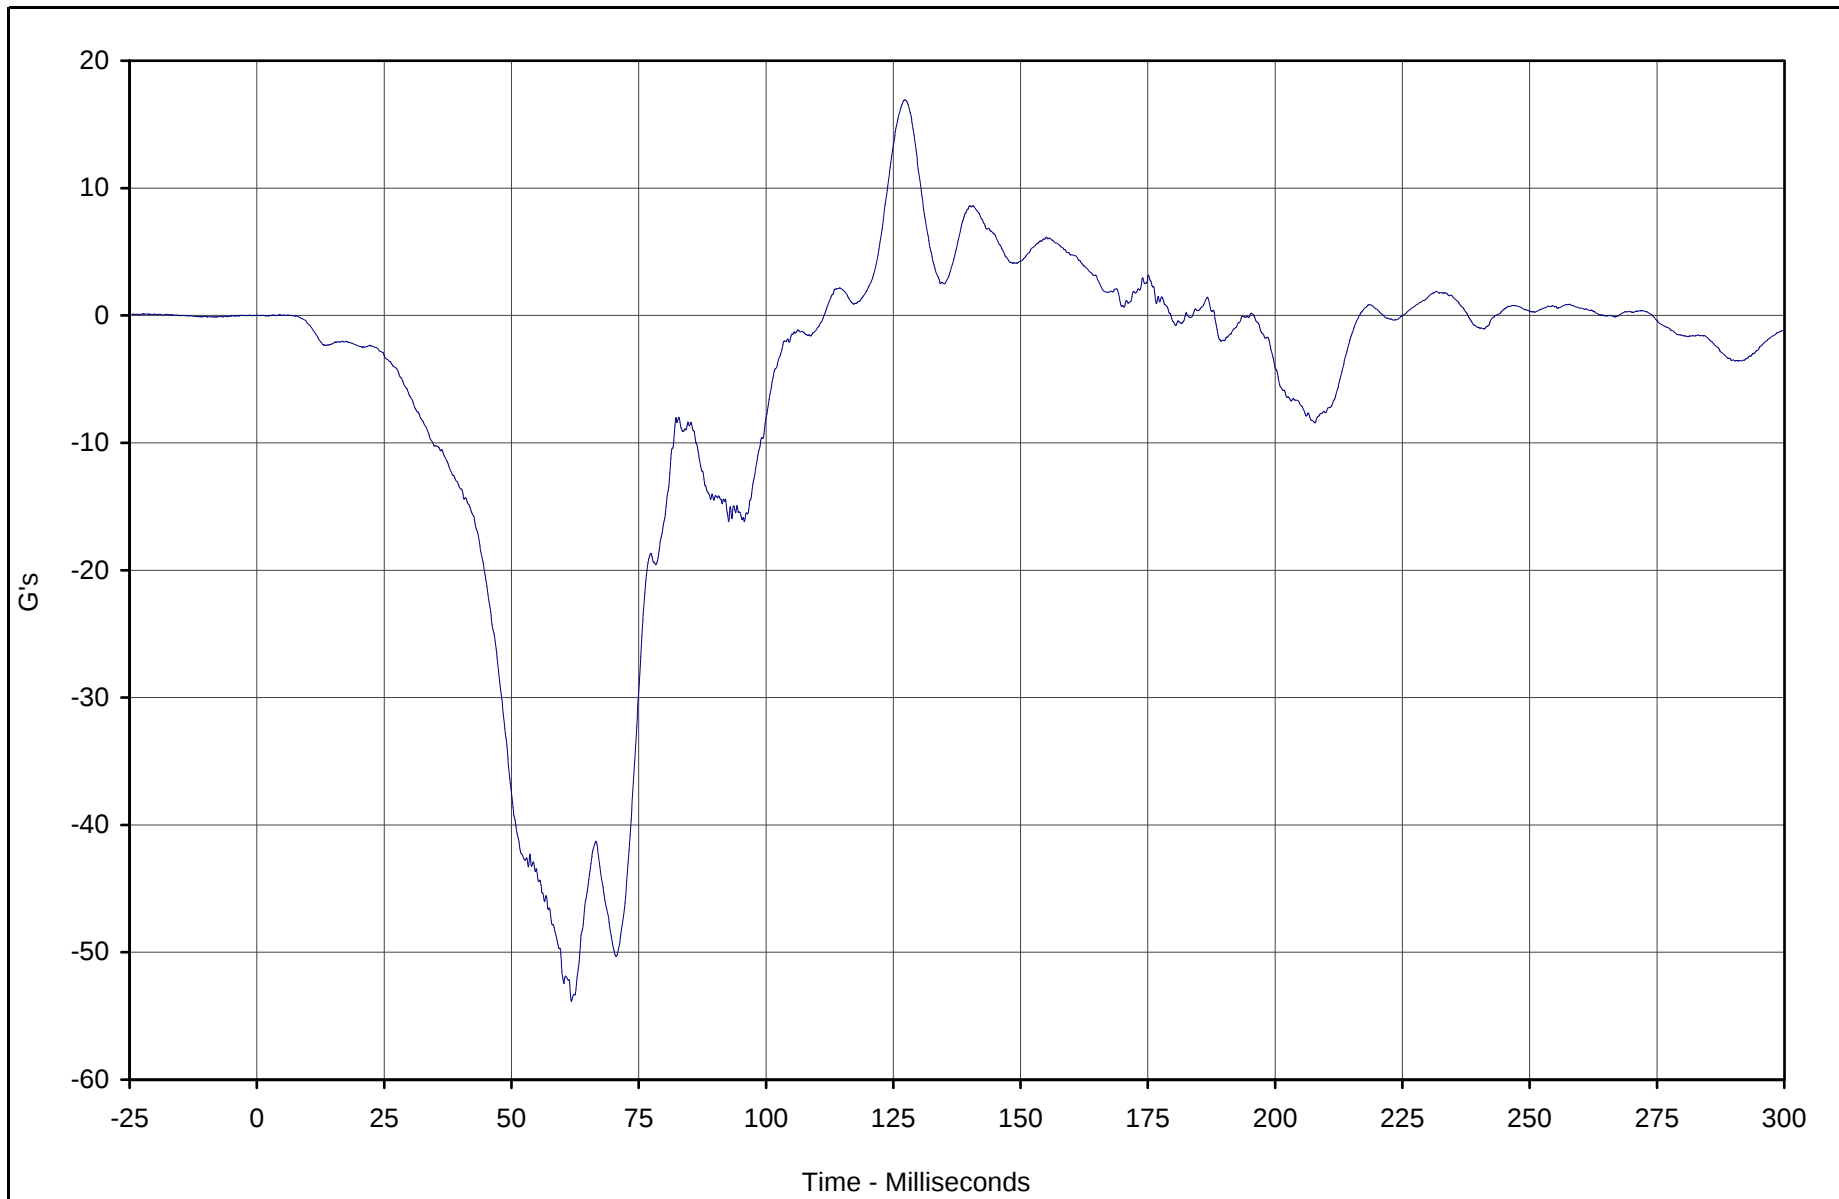

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Pelvis X	153	FIL	G's	16.9	127.2	-53.9	61.8	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

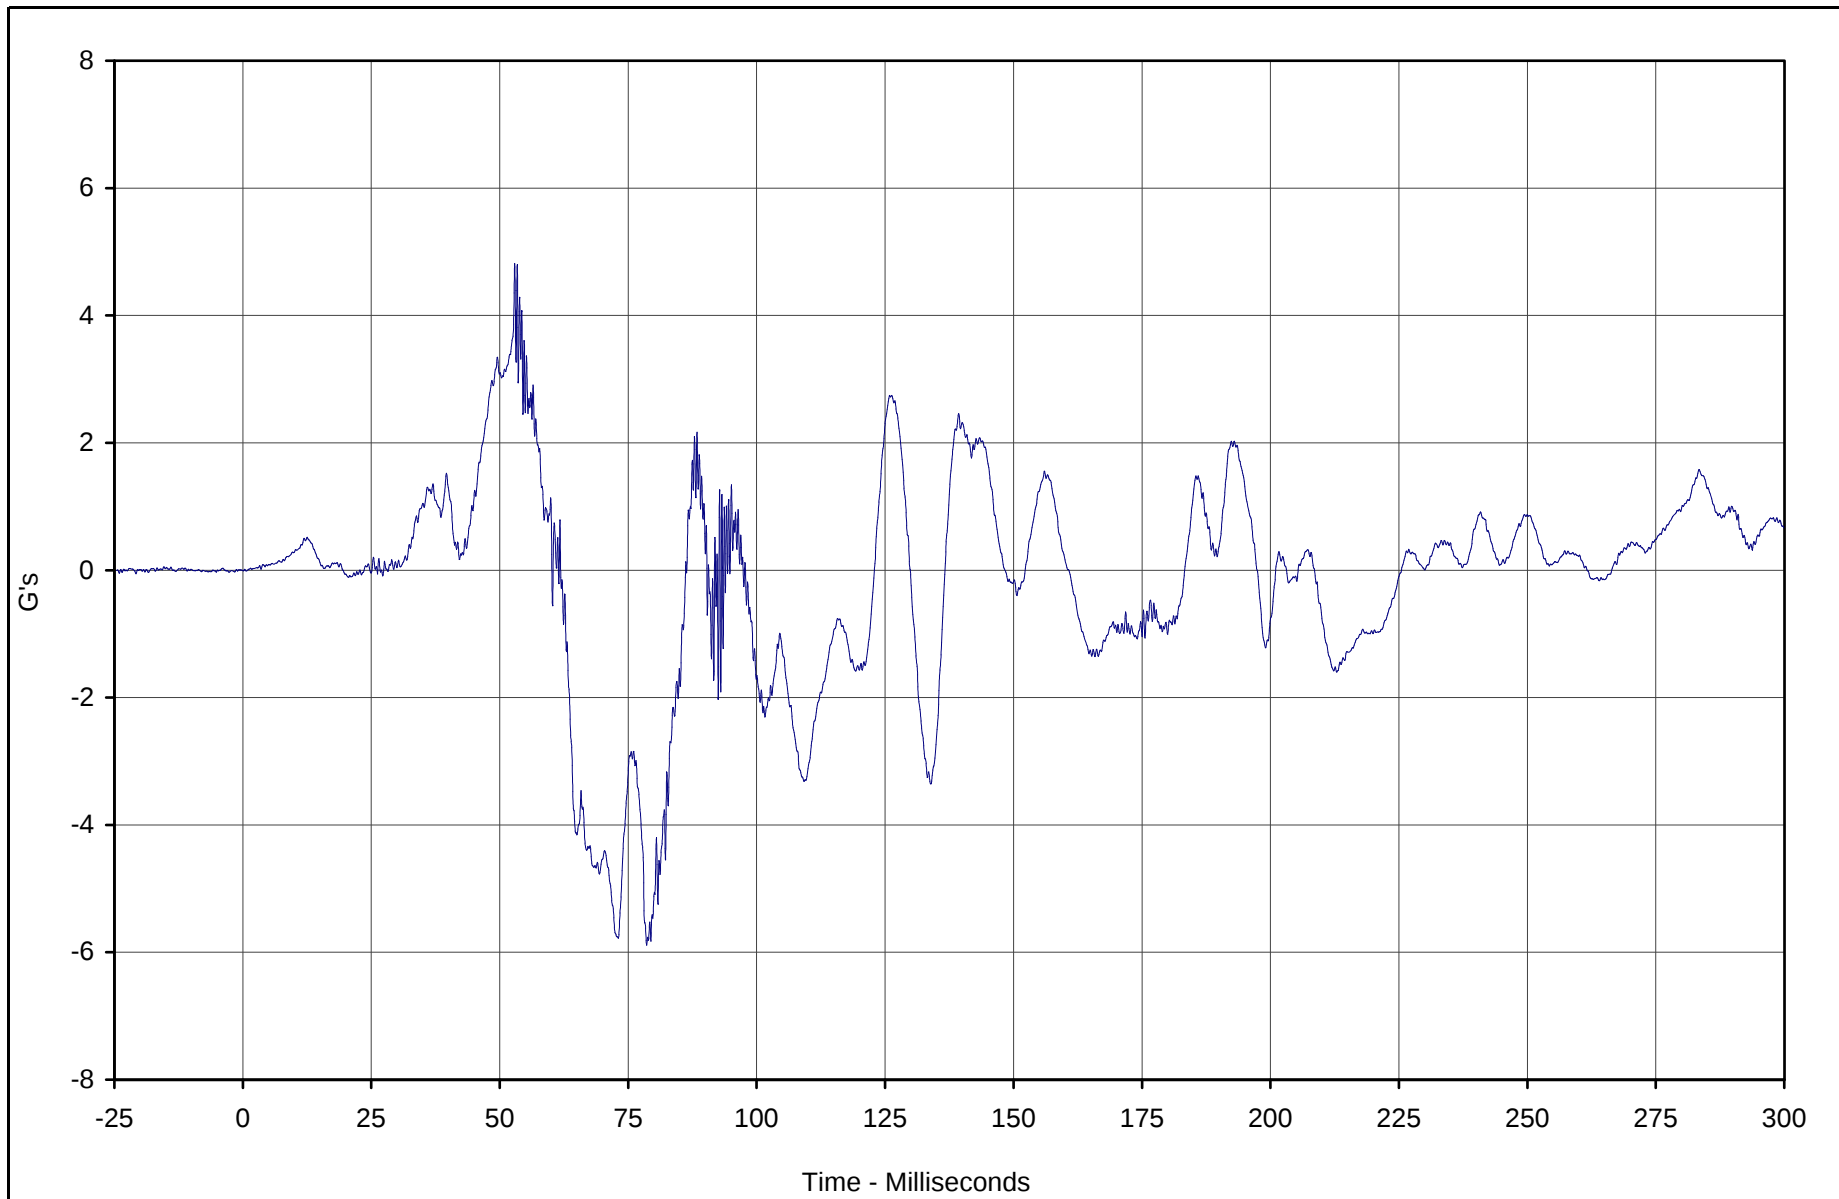

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Pelvis Y	154	FIL	G's	4.8	52.9	-5.9	78.6	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

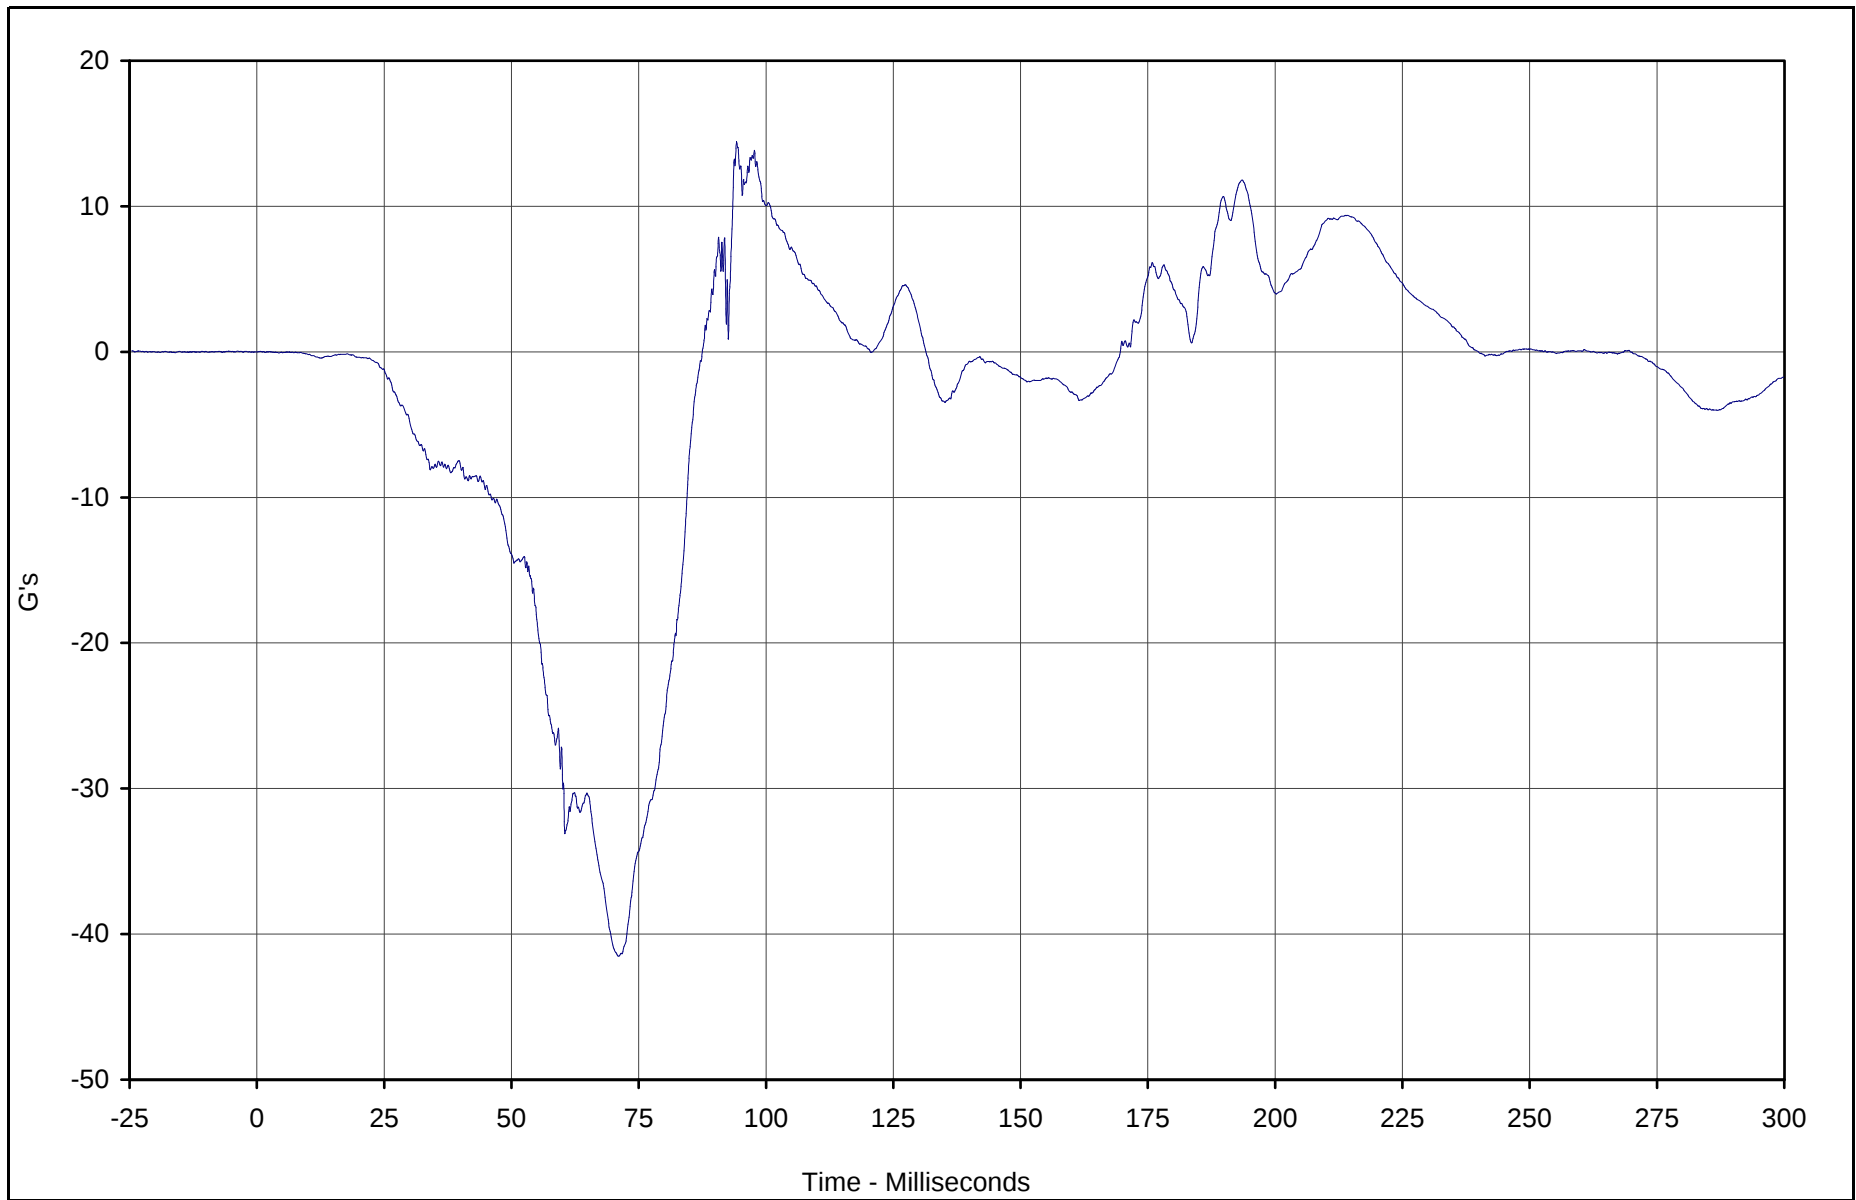

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Pelvis Z	155	FIL	G's	14.4	94.2	-41.5	71.0	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

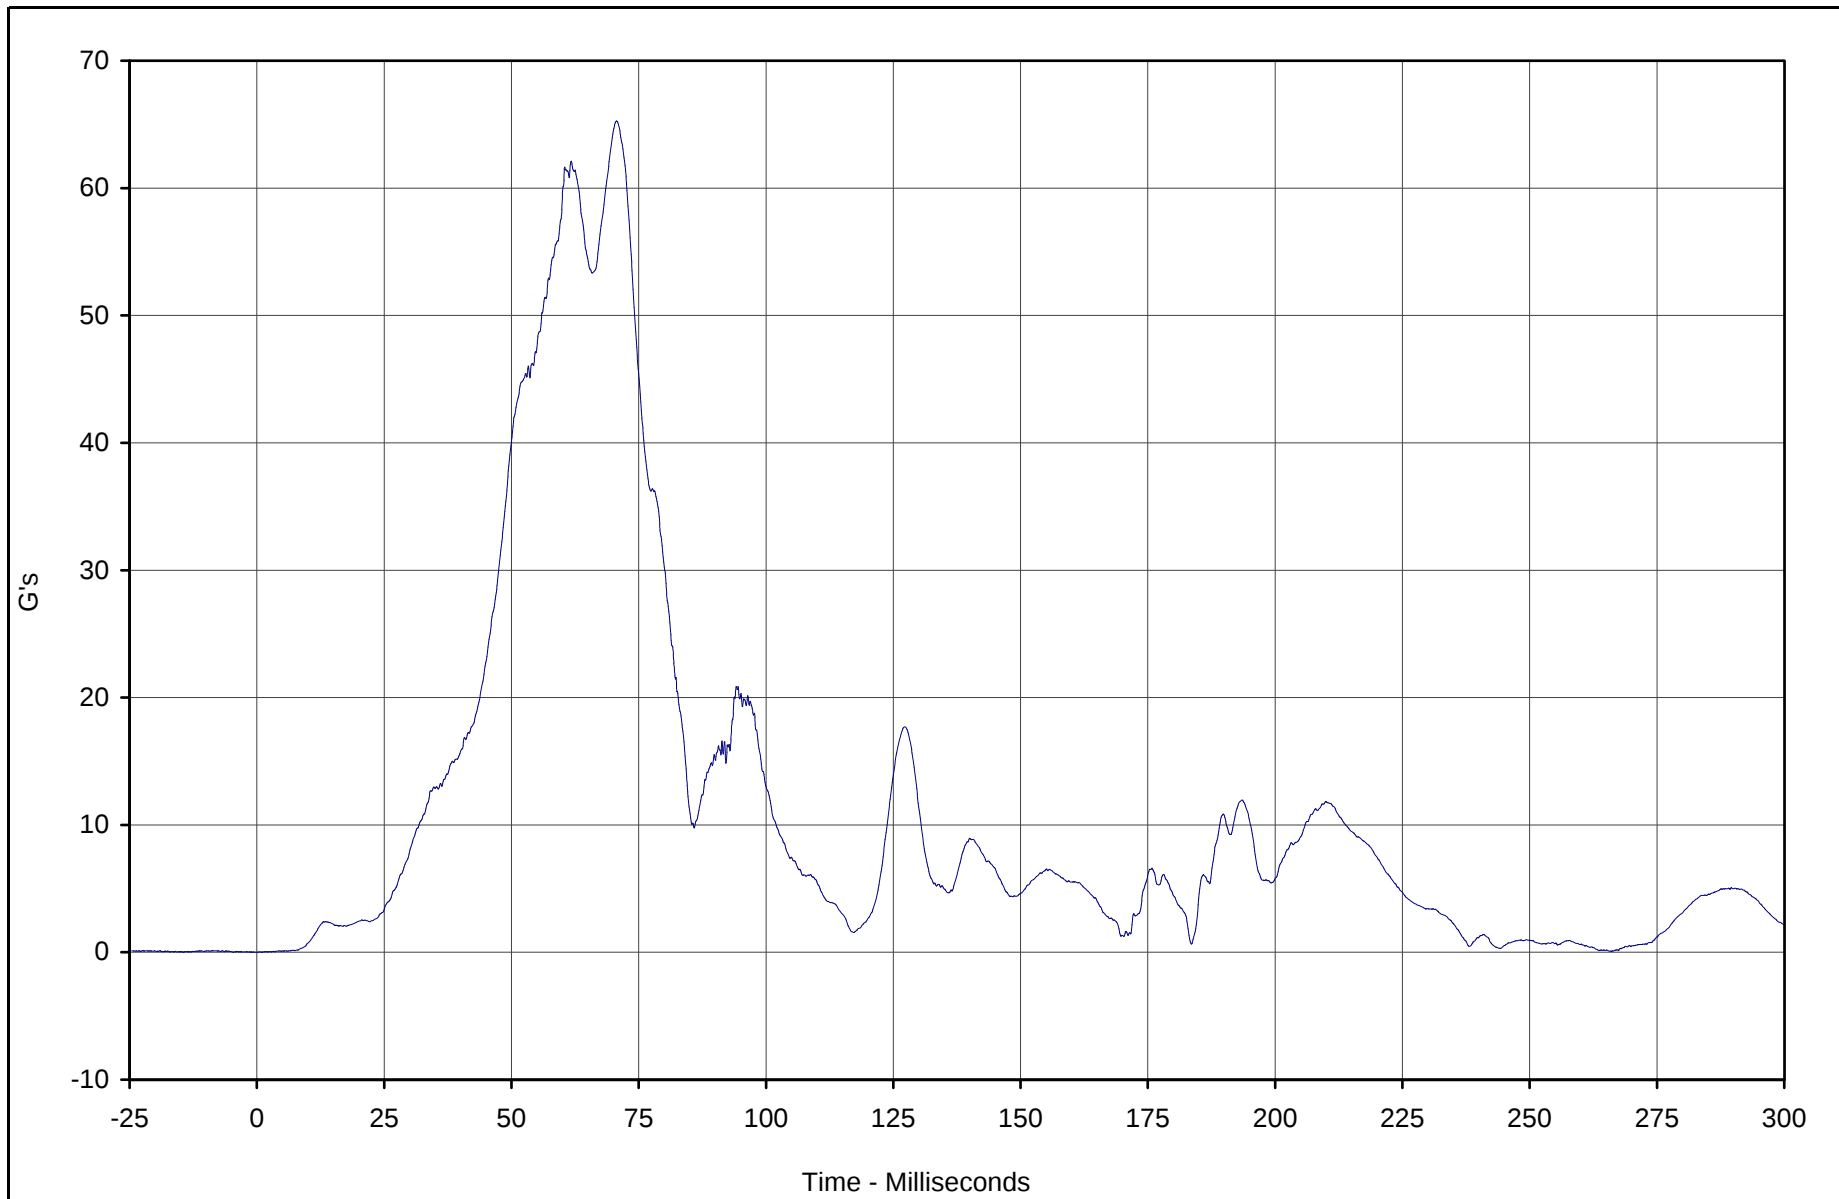

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Pelvis Resultant	153	RES	G's	65.3	70.7	0.0	0.2	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

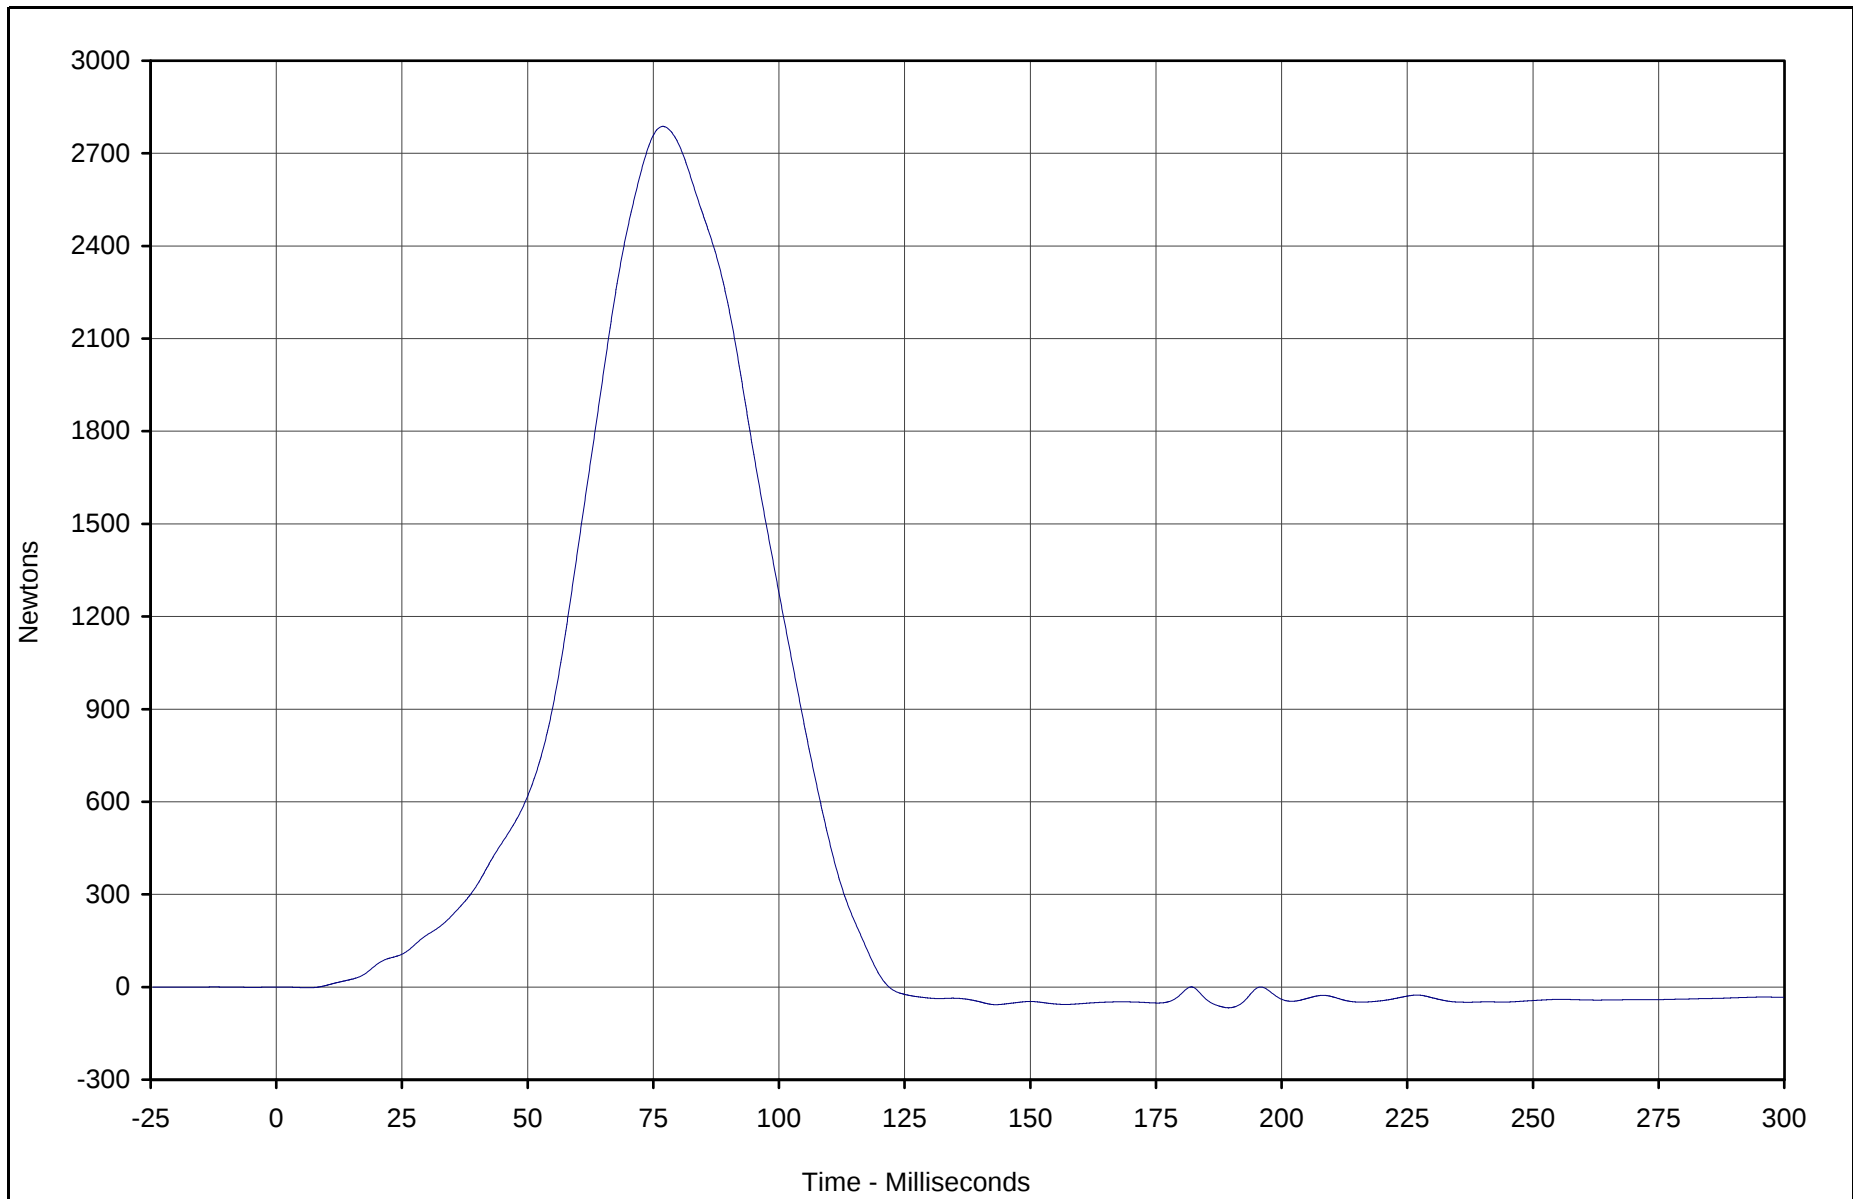

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Seat Tether Load	156	FIL	Newtons	2787.2	76.9	-67.3	189.5	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

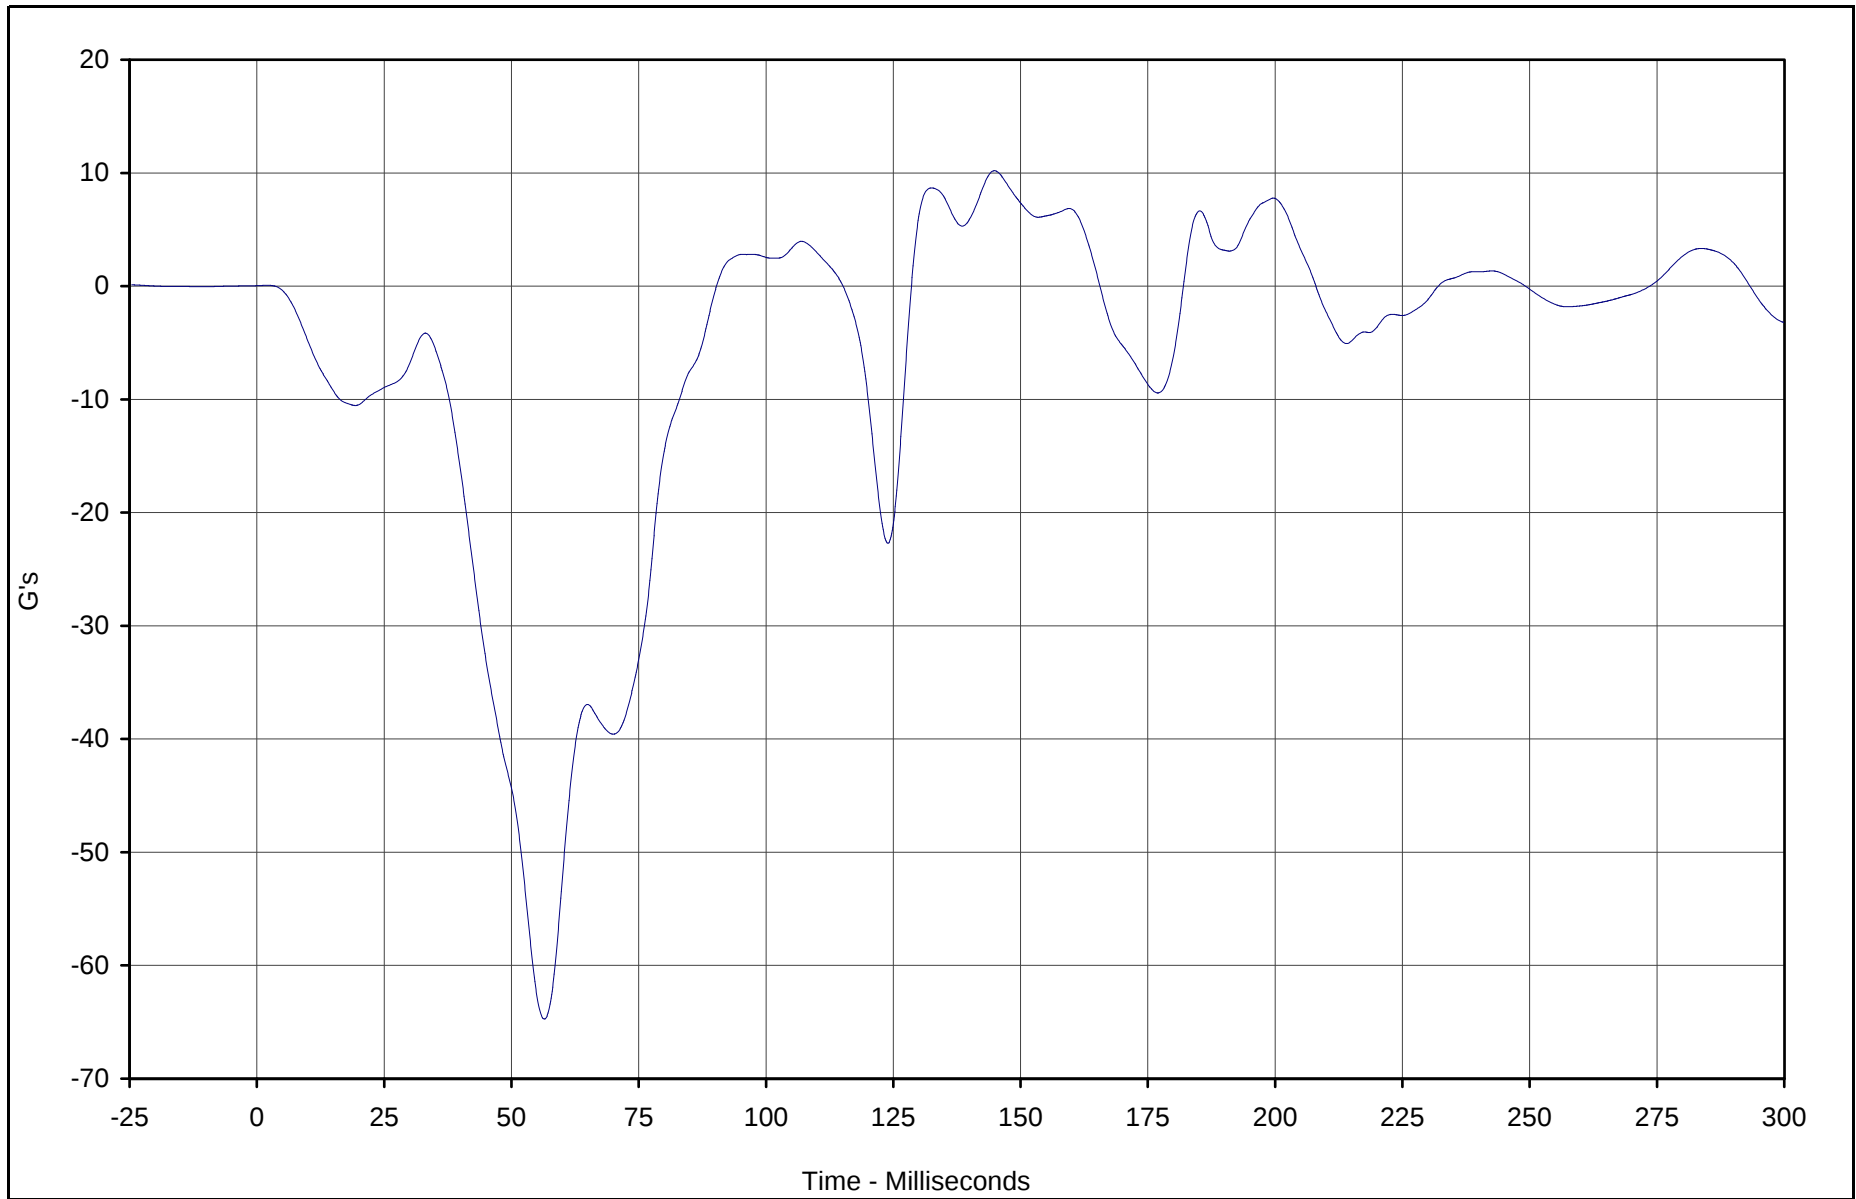

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Car Seat X	157	FIL	G's	10.2	144.9	-64.7	56.5	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

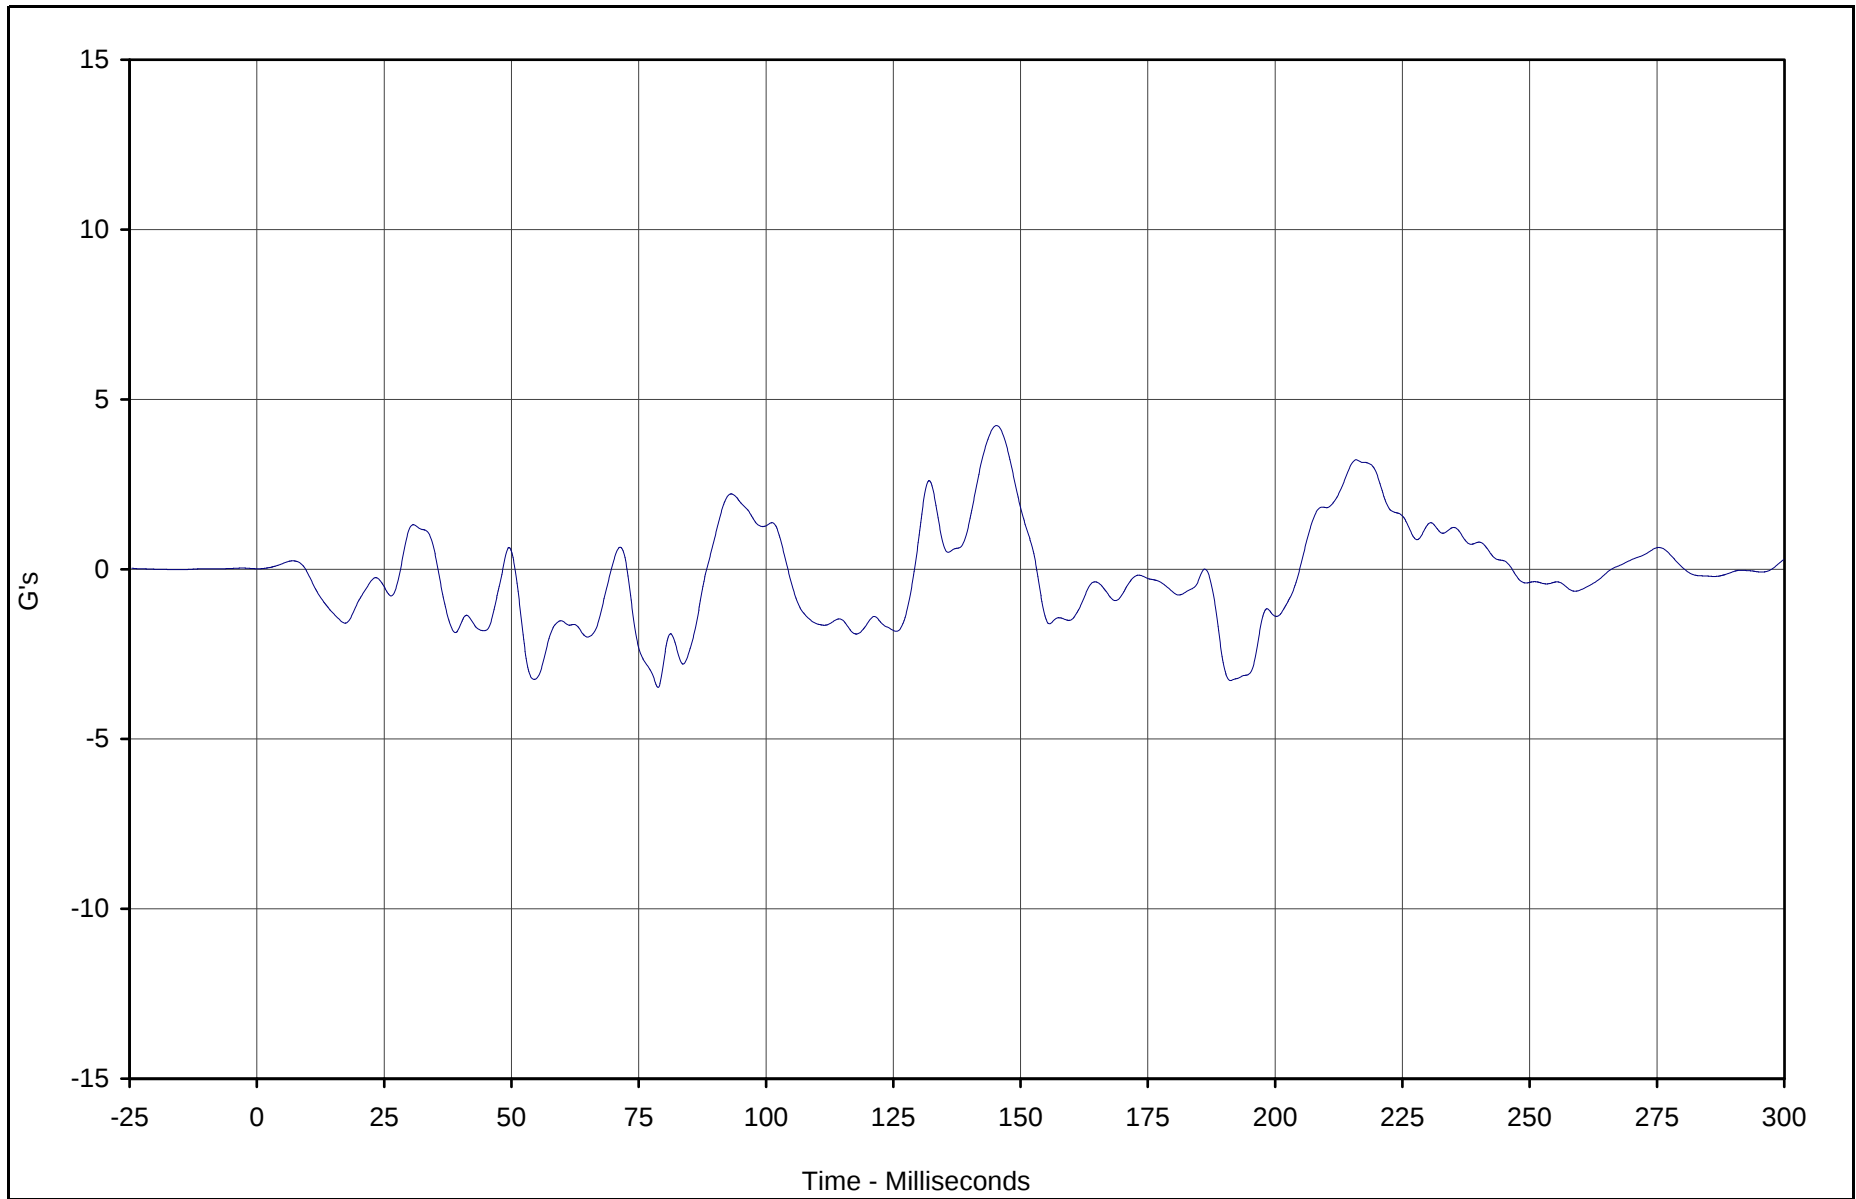

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Car Seat Y	158	FIL	G's	4.2	145.3	-3.5	78.8	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

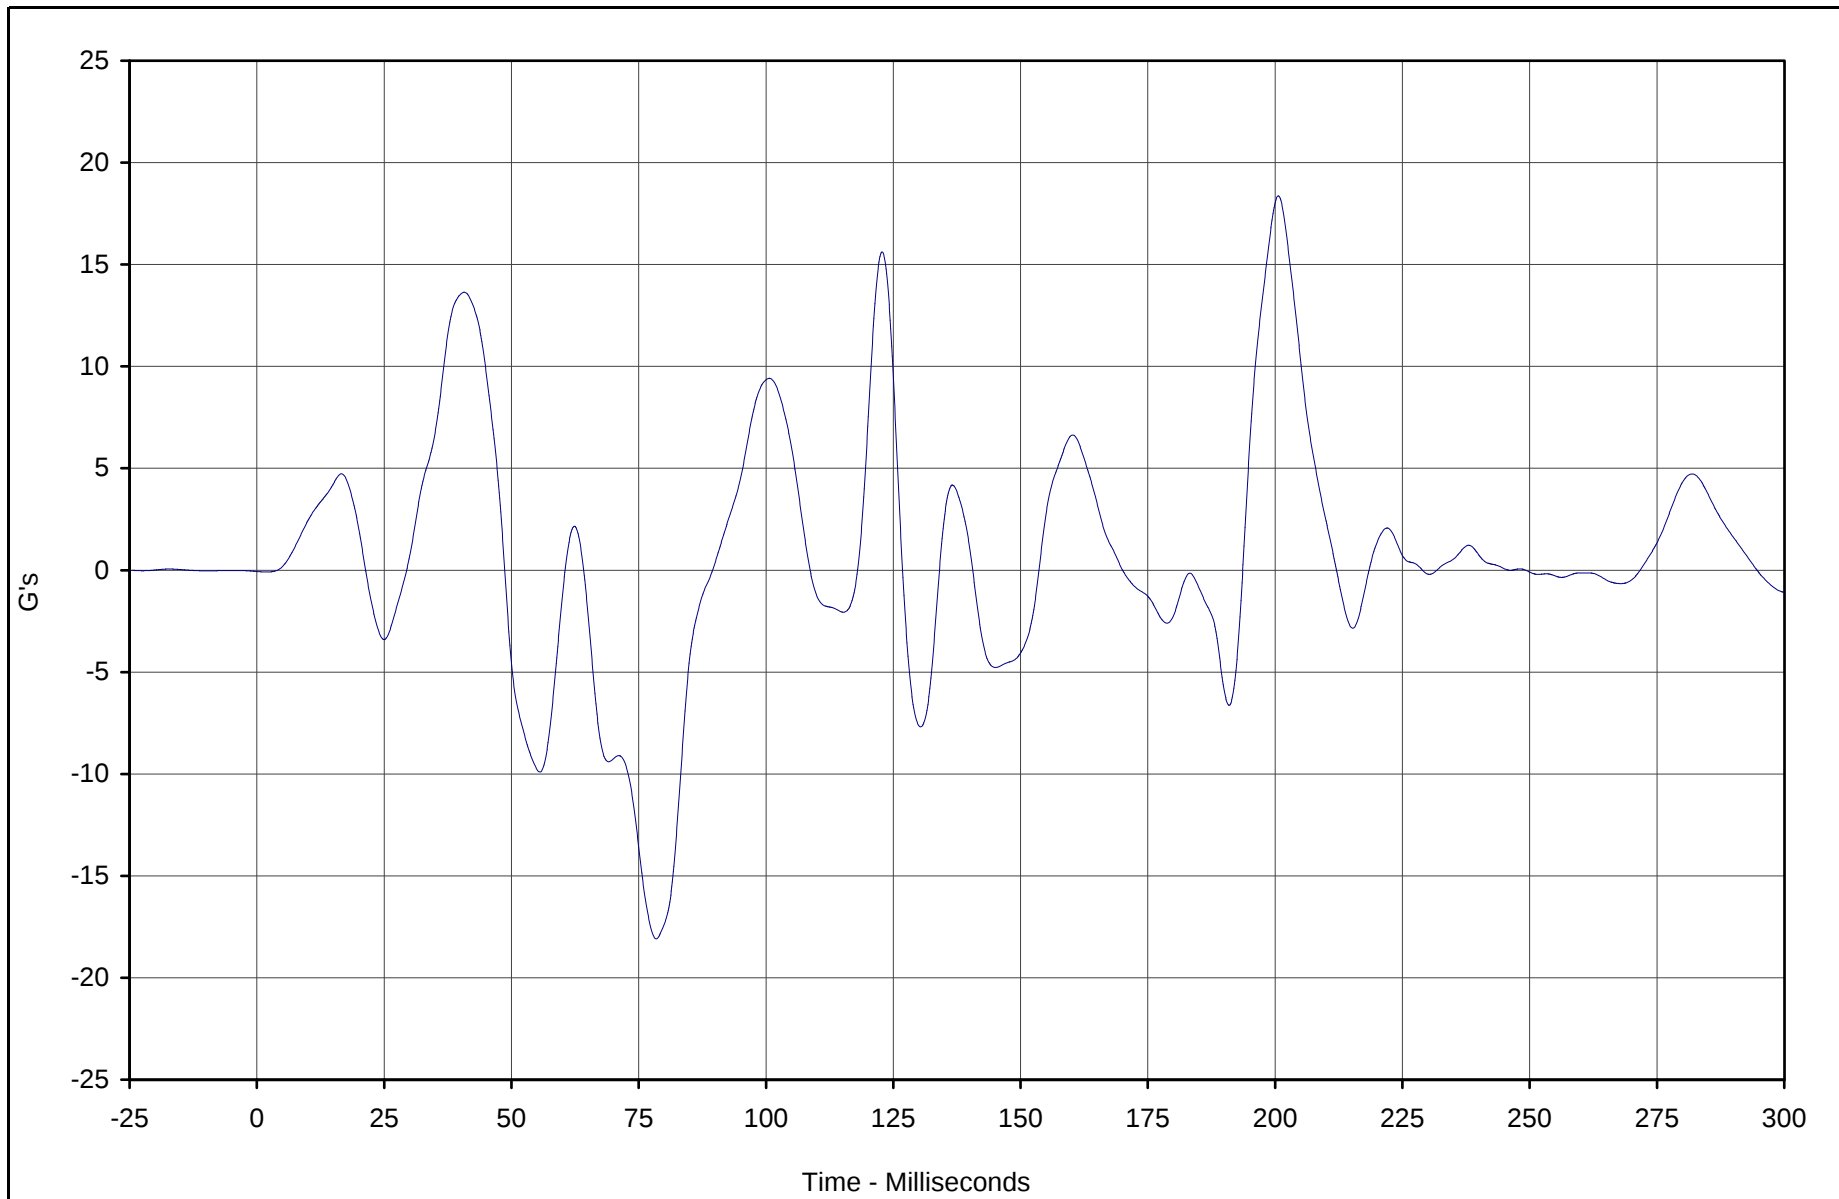

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Car Seat Z	159	FIL	G's	18.4	200.6	-18.1	78.4	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

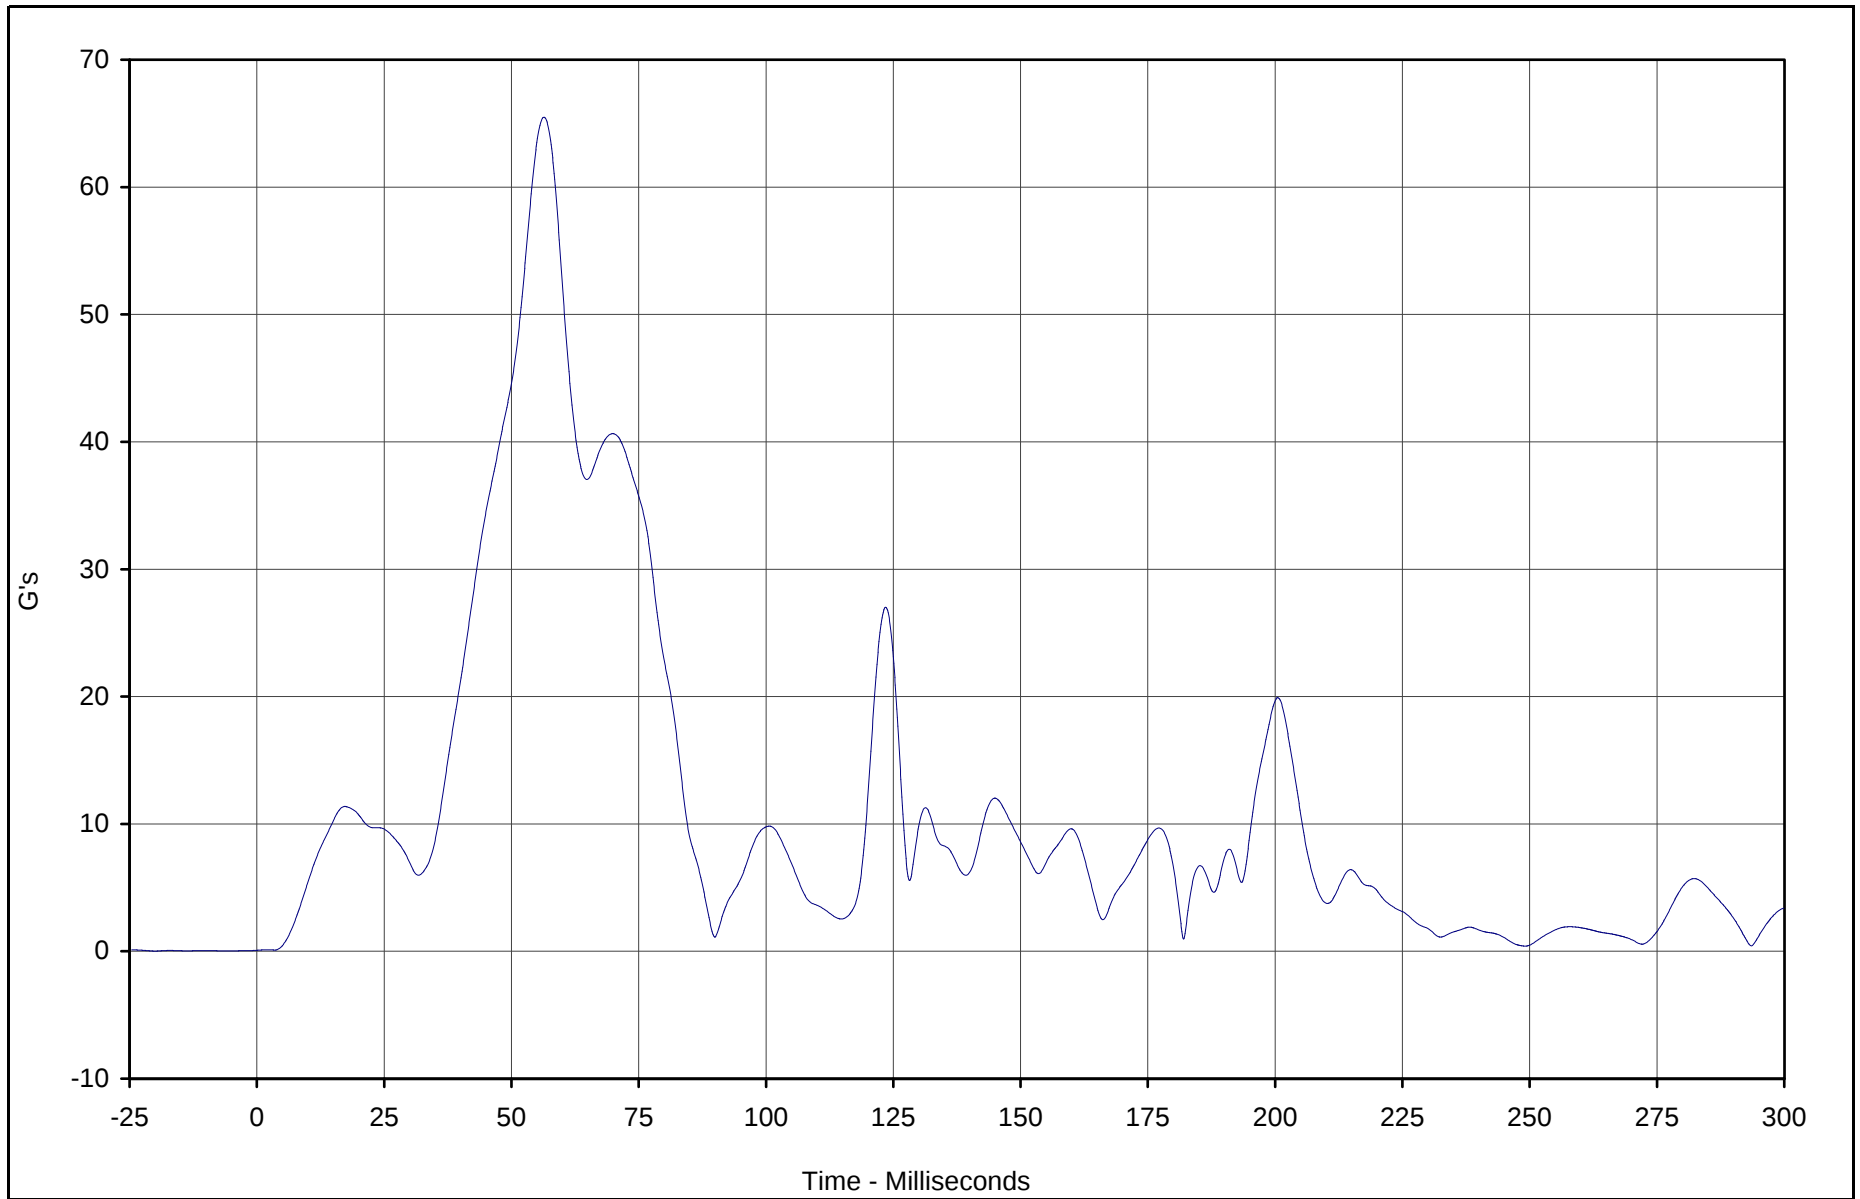

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Right Rear (3 Yr.) Car Seat Resultant	157	RES	G's	65.5	56.4	0.1	0.0	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

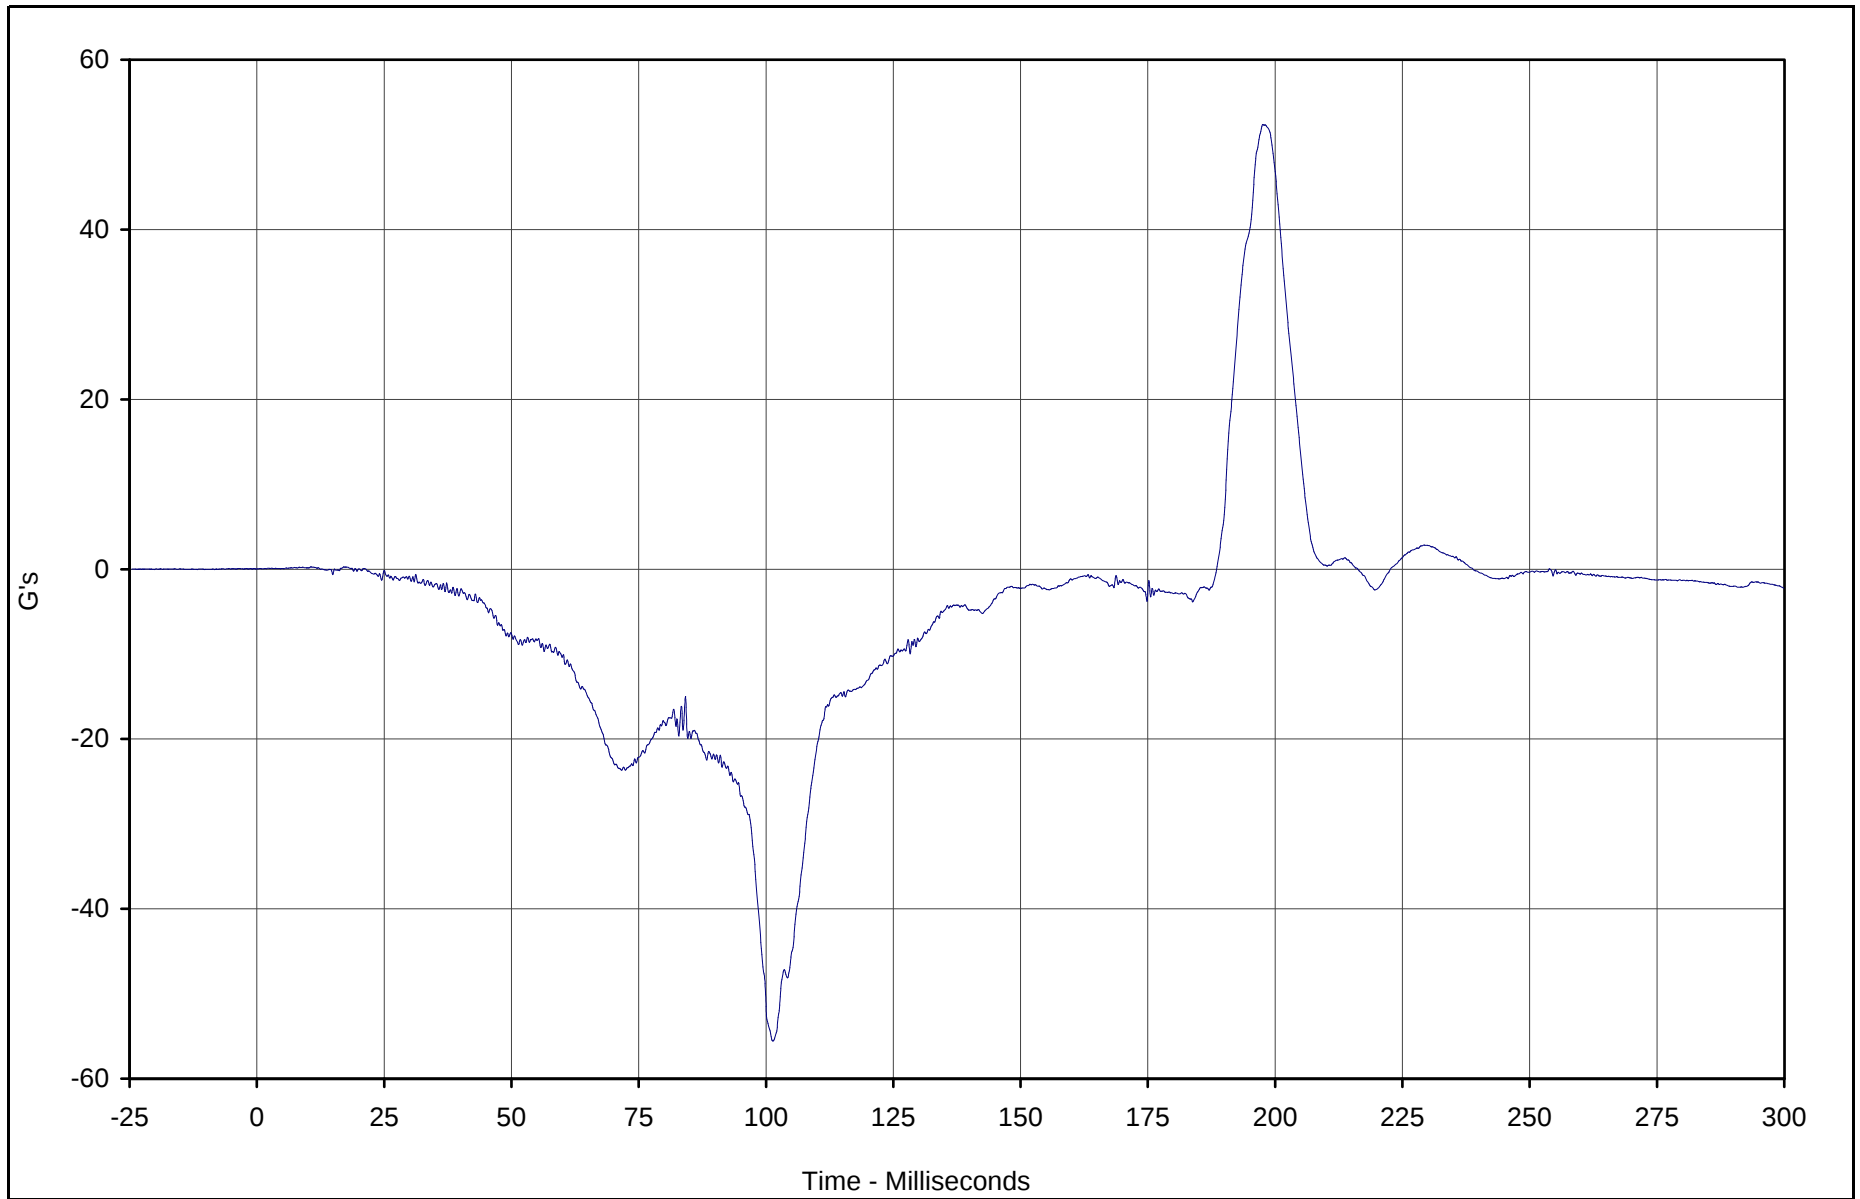

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Head X	160	FIL	G's	52.4	197.6	-55.6	101.4	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

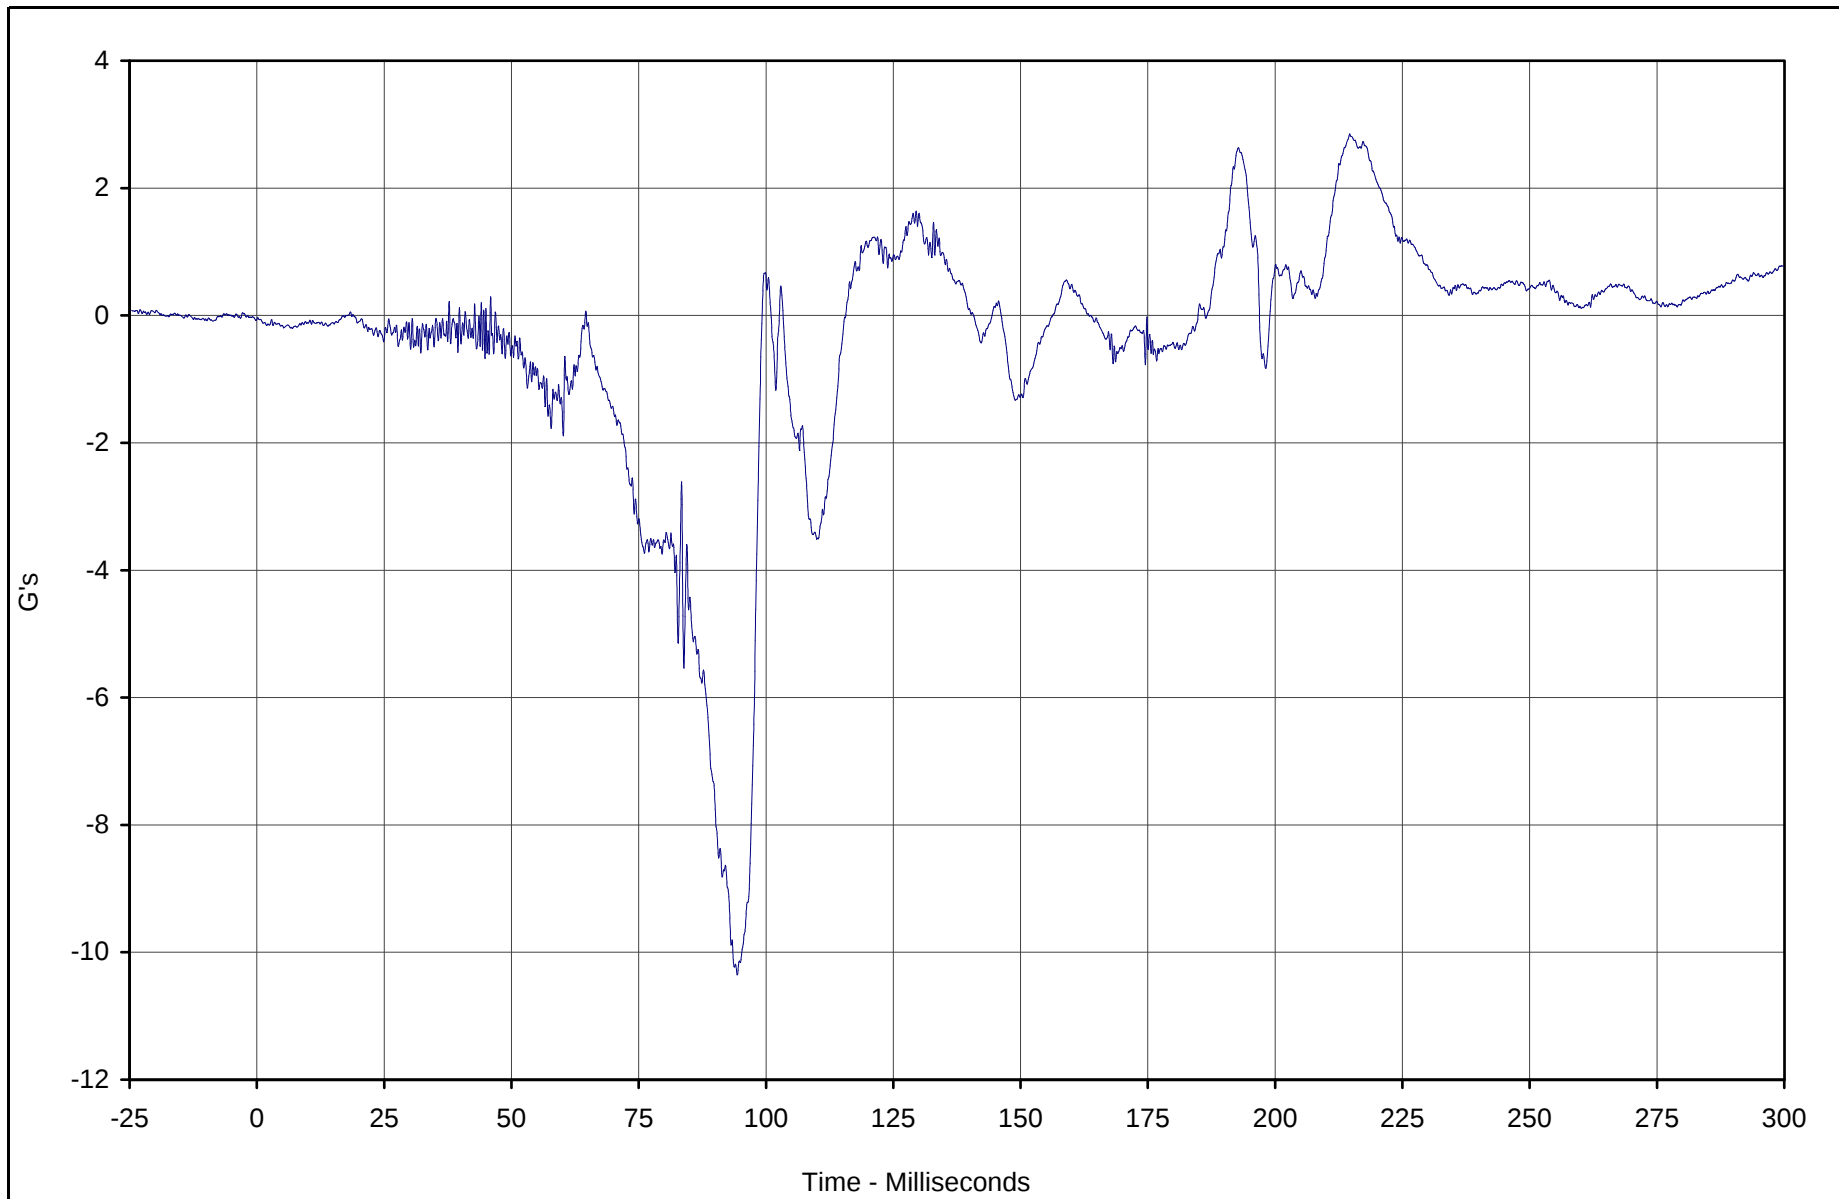

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Head Y	161	FIL	G's	2.8	214.6	-10.4	94.3	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

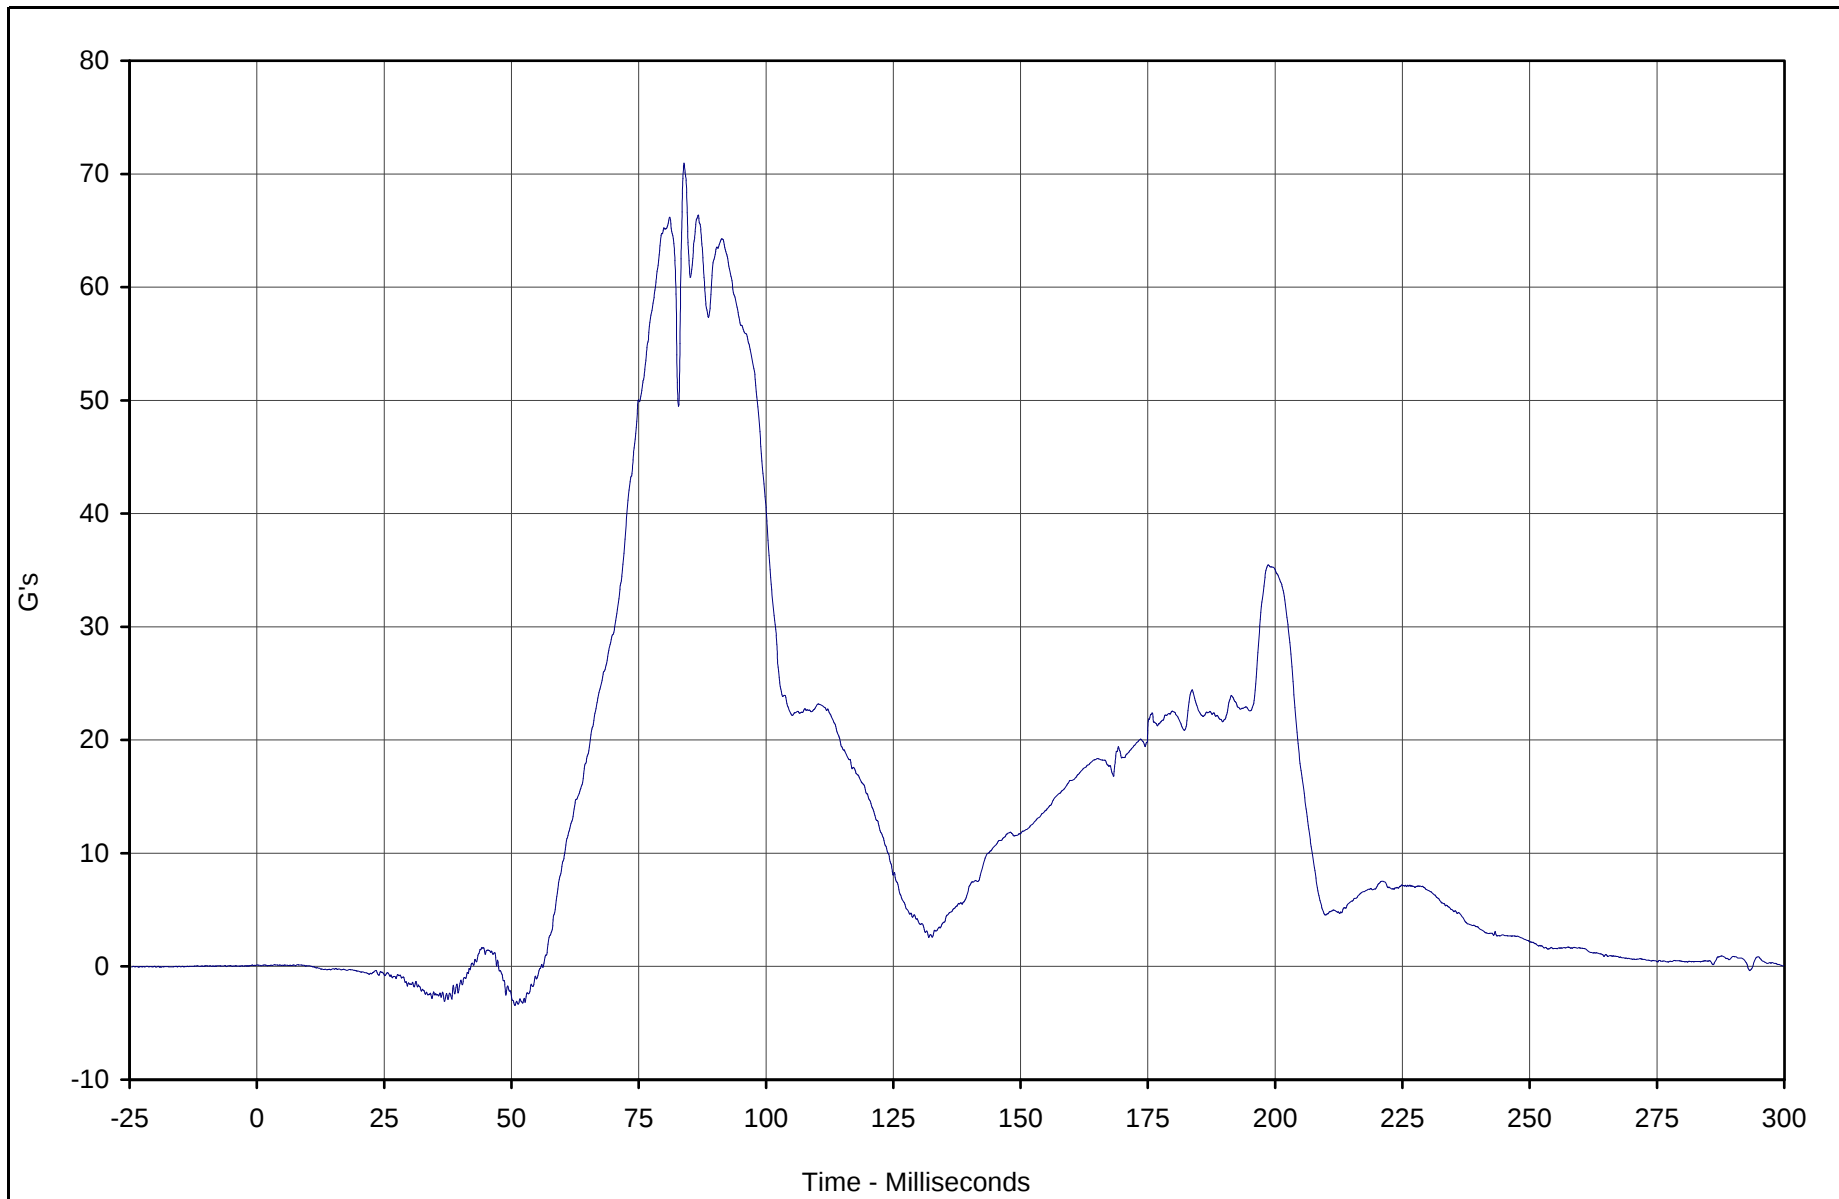

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Head Z	162	FIL	G's	71.0	83.9	-3.5	50.7	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

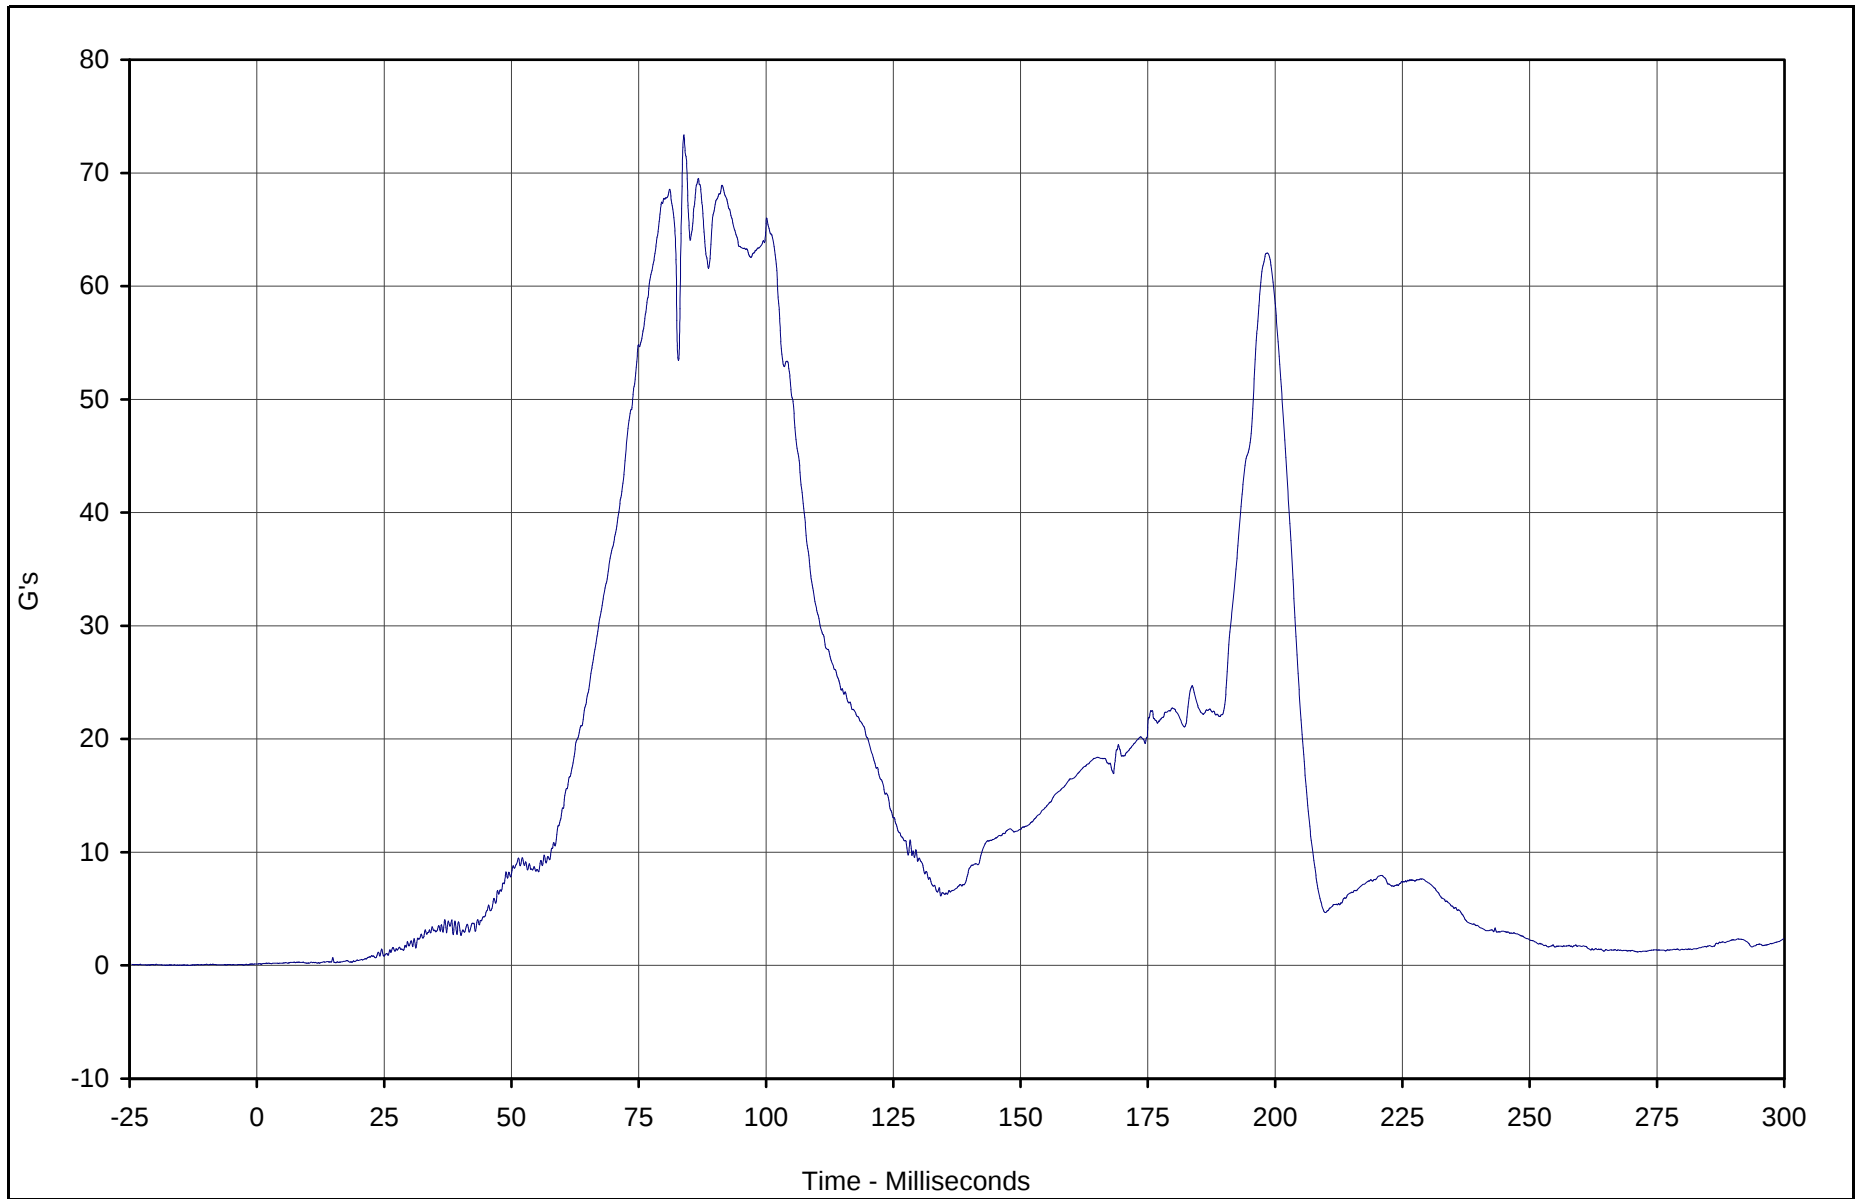

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Head Resultant	160	RES	G's	73.4	83.9	0.1	0.9	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

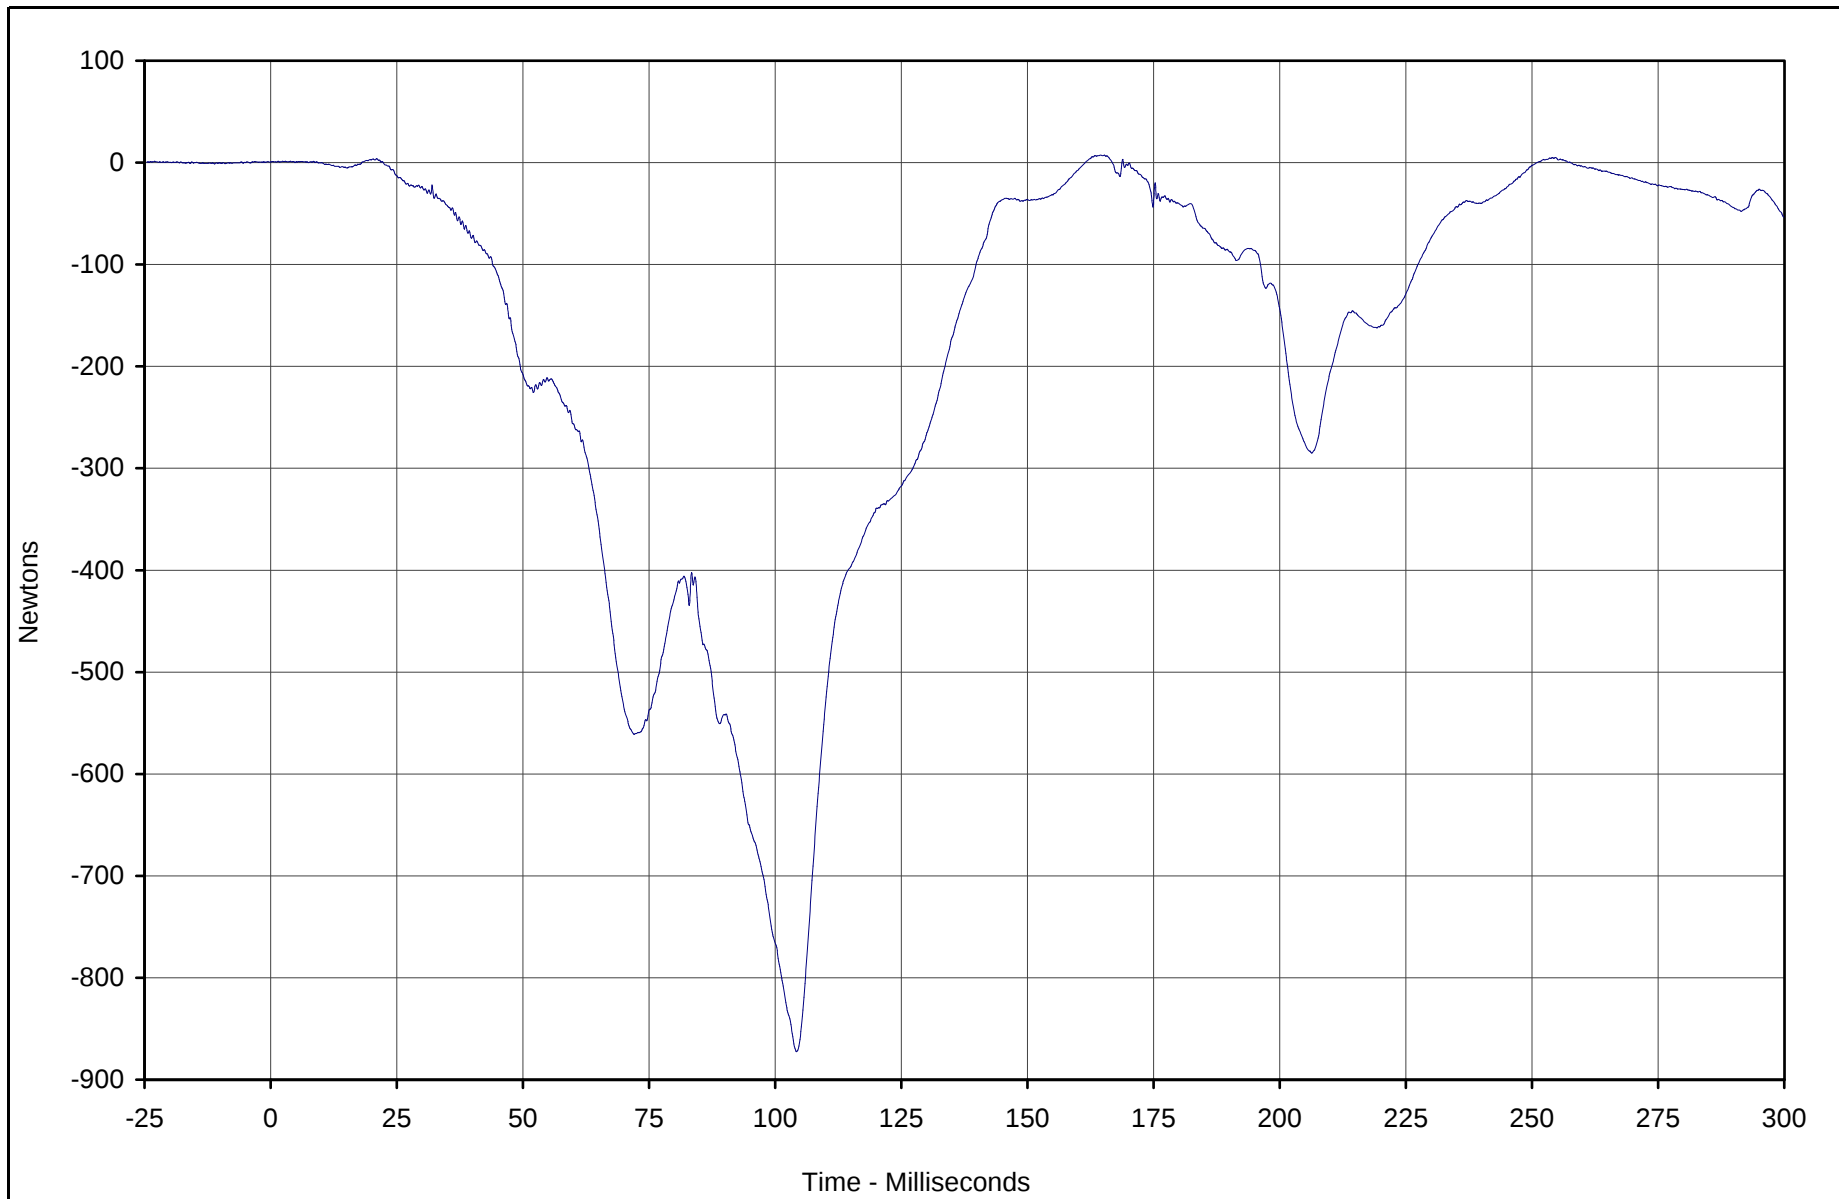

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Upper Neck Force X	163	FIL	Newtons	7.5	165.2	-872.6	104.2	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

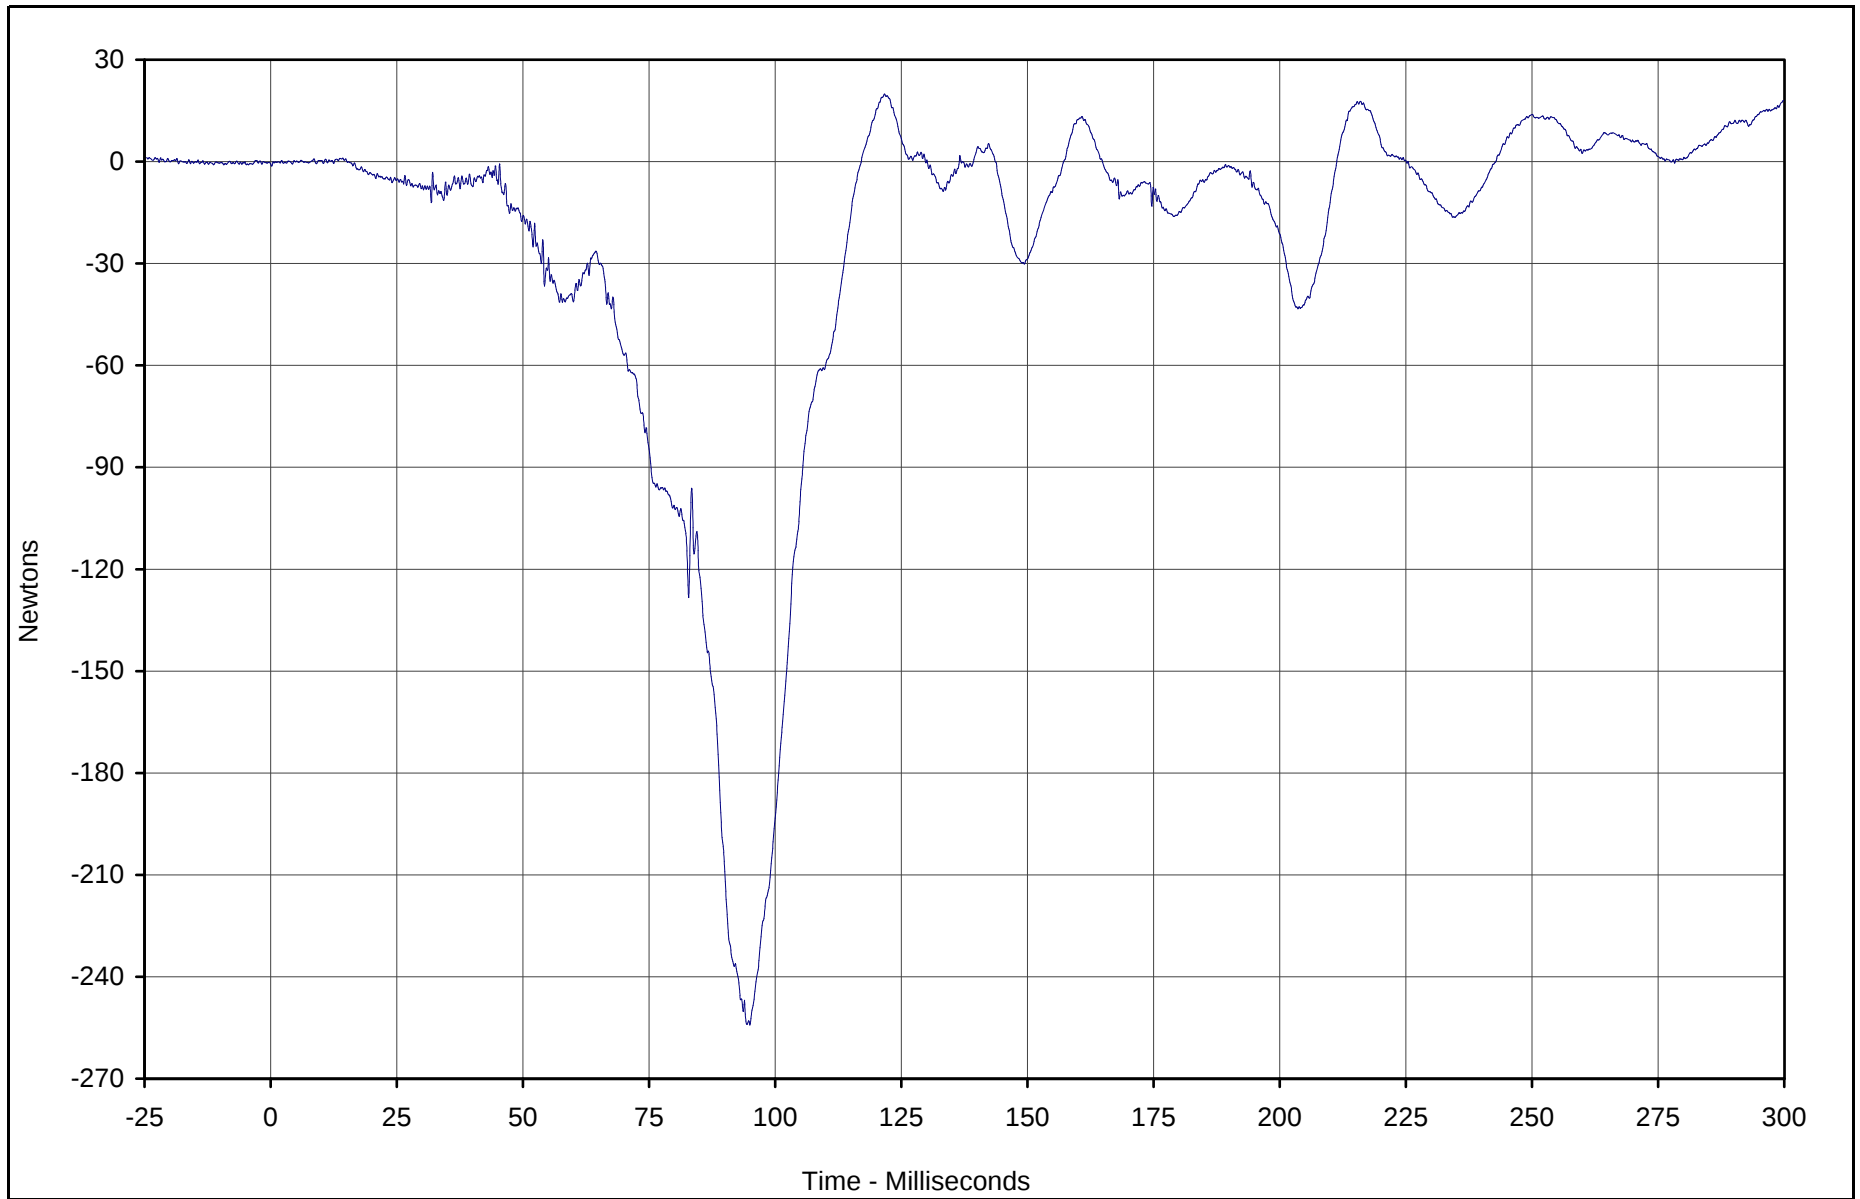

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Upper Neck Force Y	164	FIL	Newtons	19.9	121.7	-254.2	95.0	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

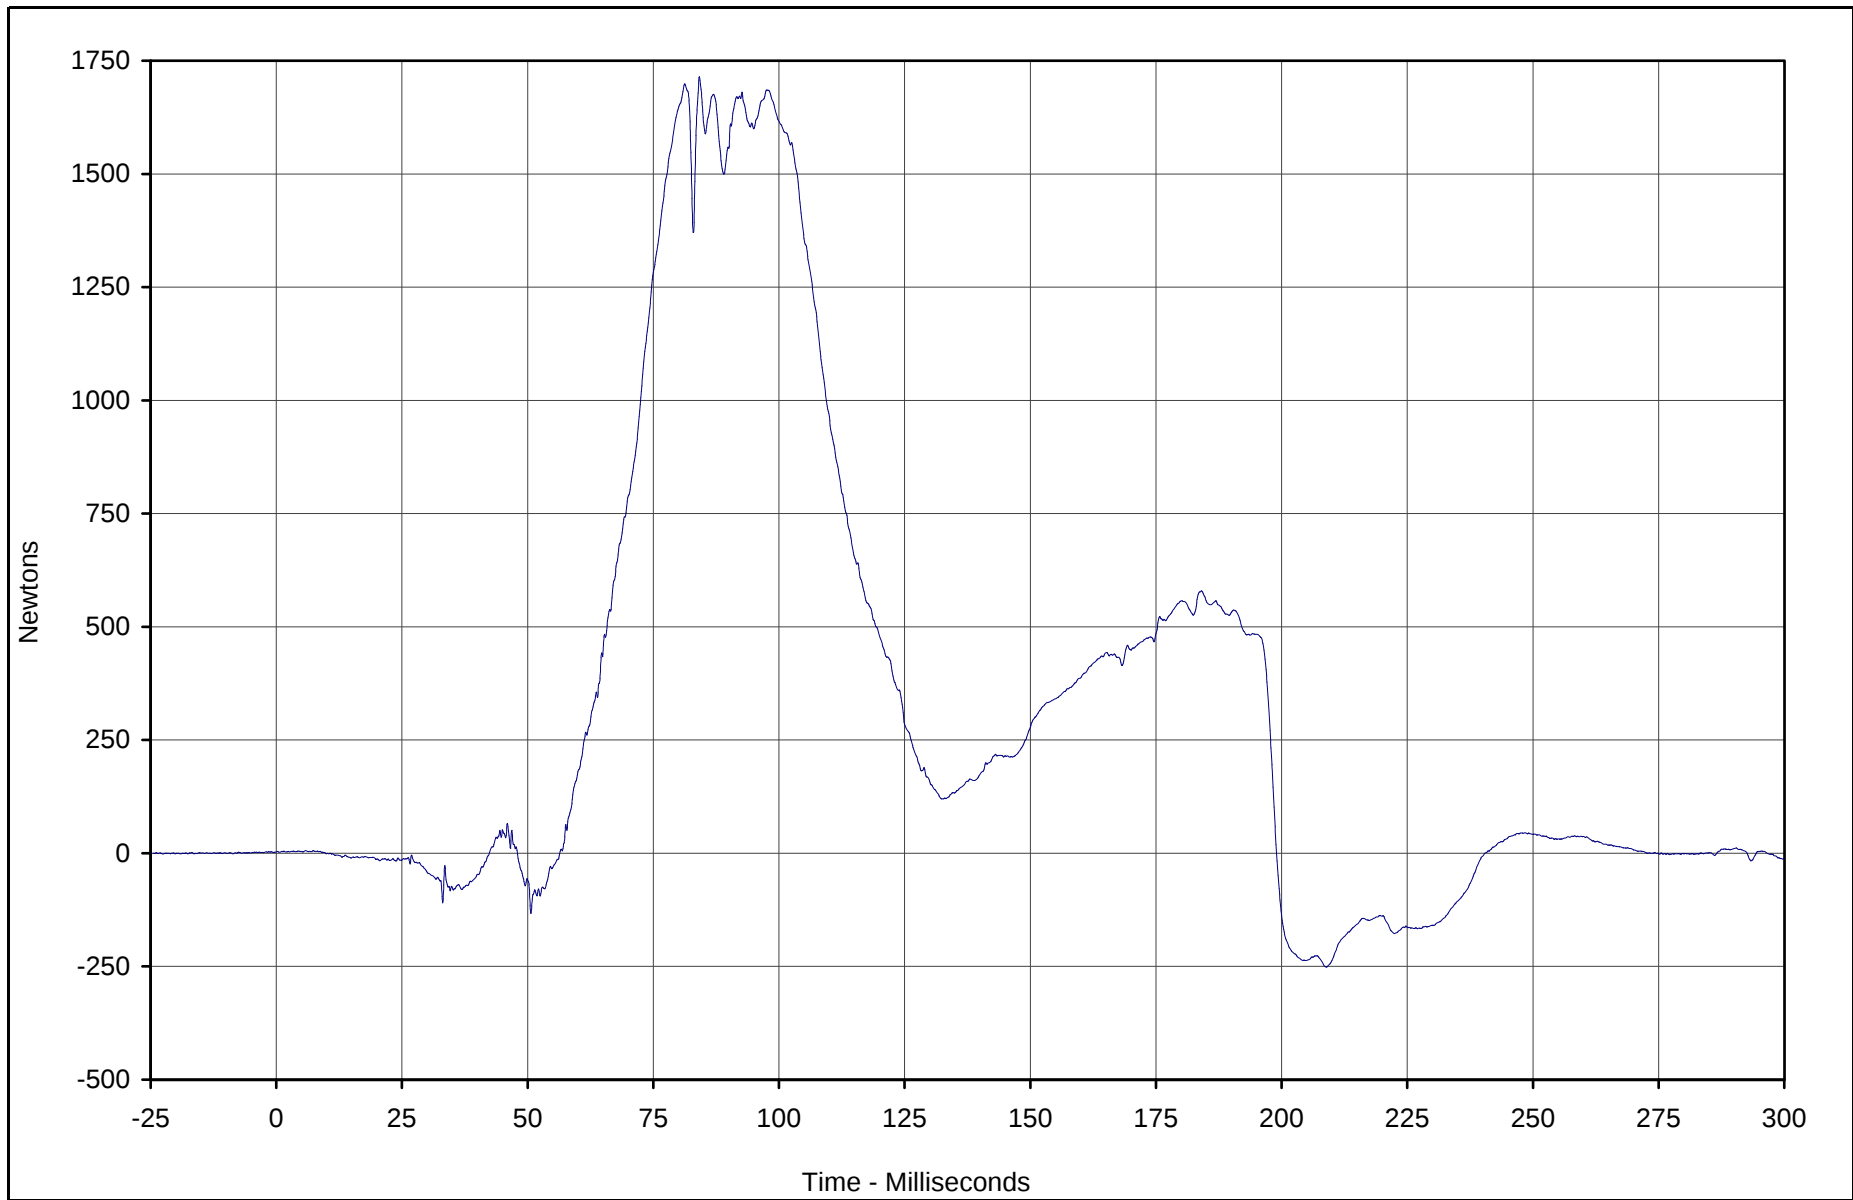

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Upper Neck Force Z	165	FIL	Newtons	1714.5	84.2	-251.3	208.9	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

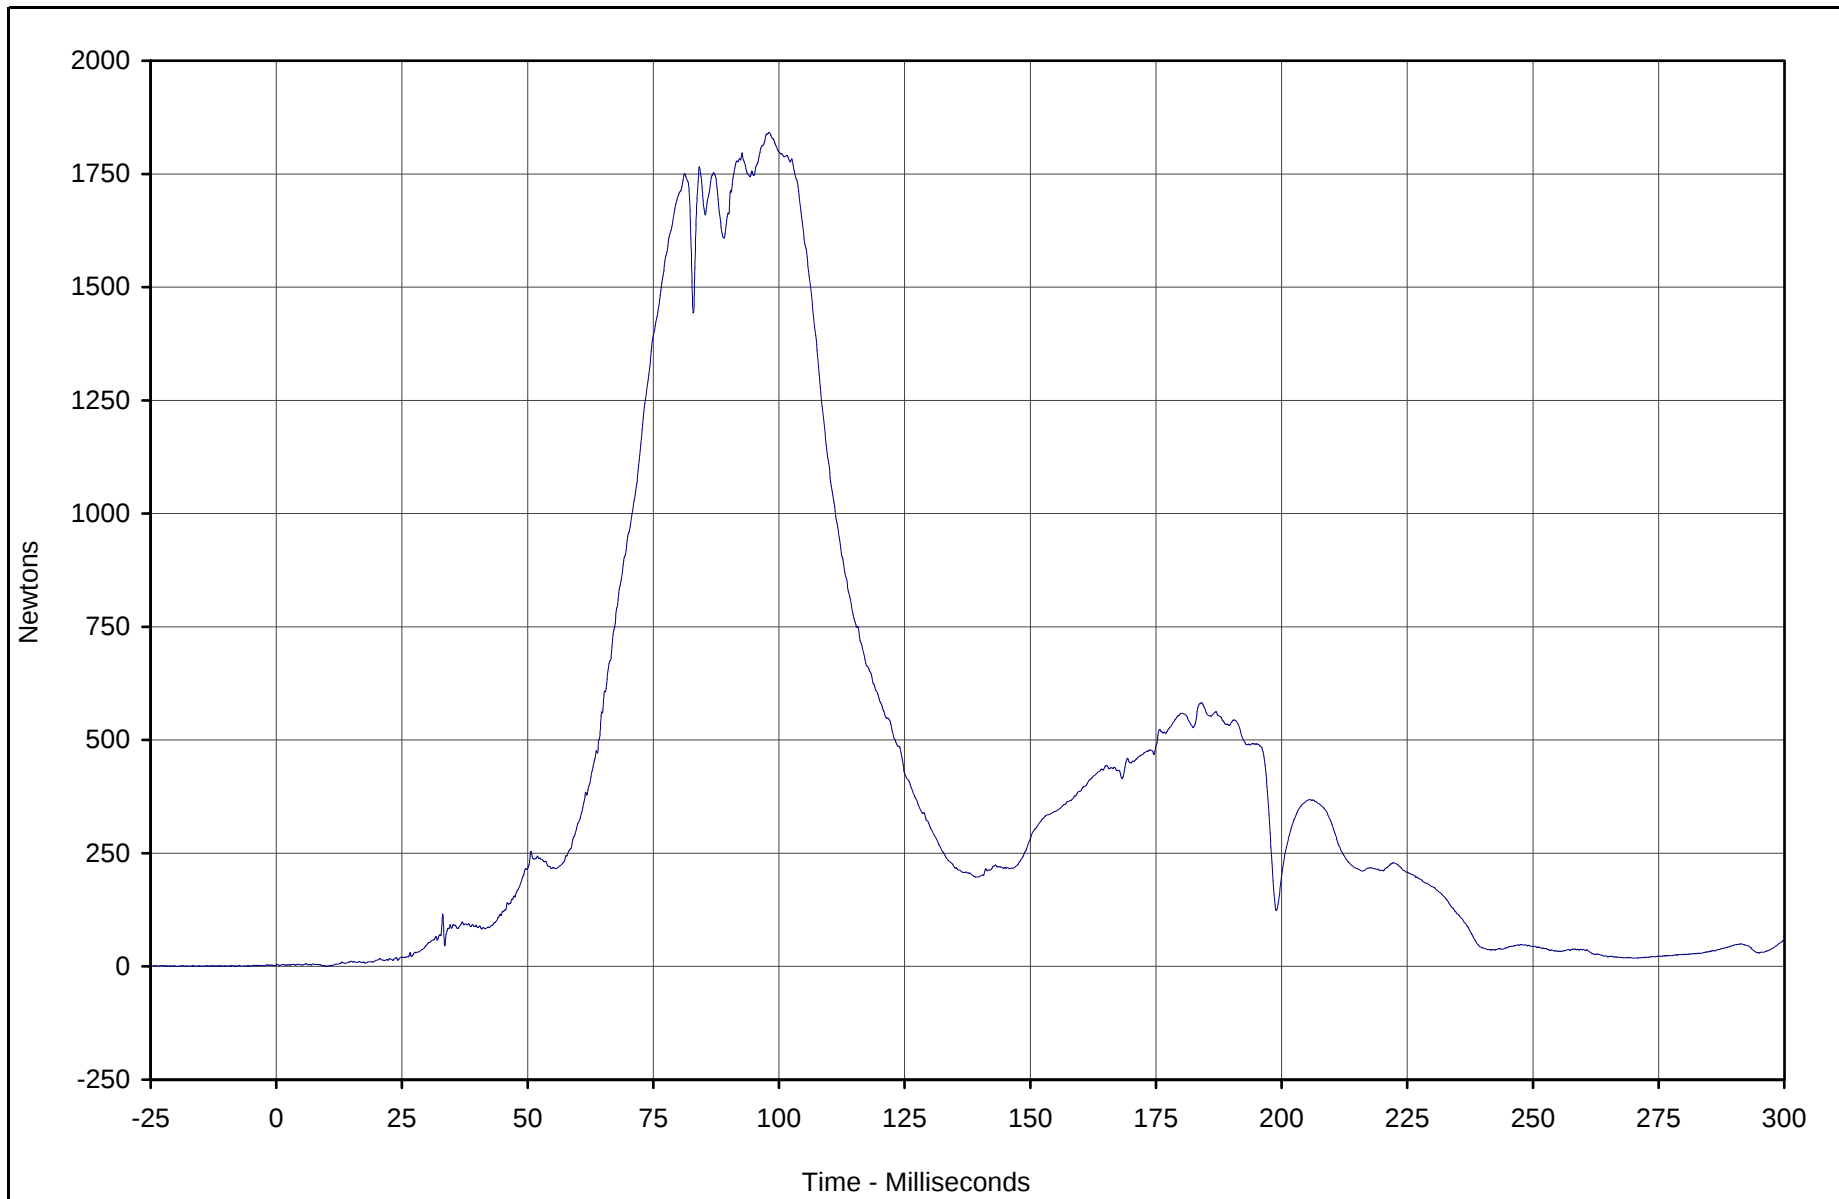

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Upper Neck Force Res.	163	RES	Newtons	1841.5	98.0	0.4	9.8	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

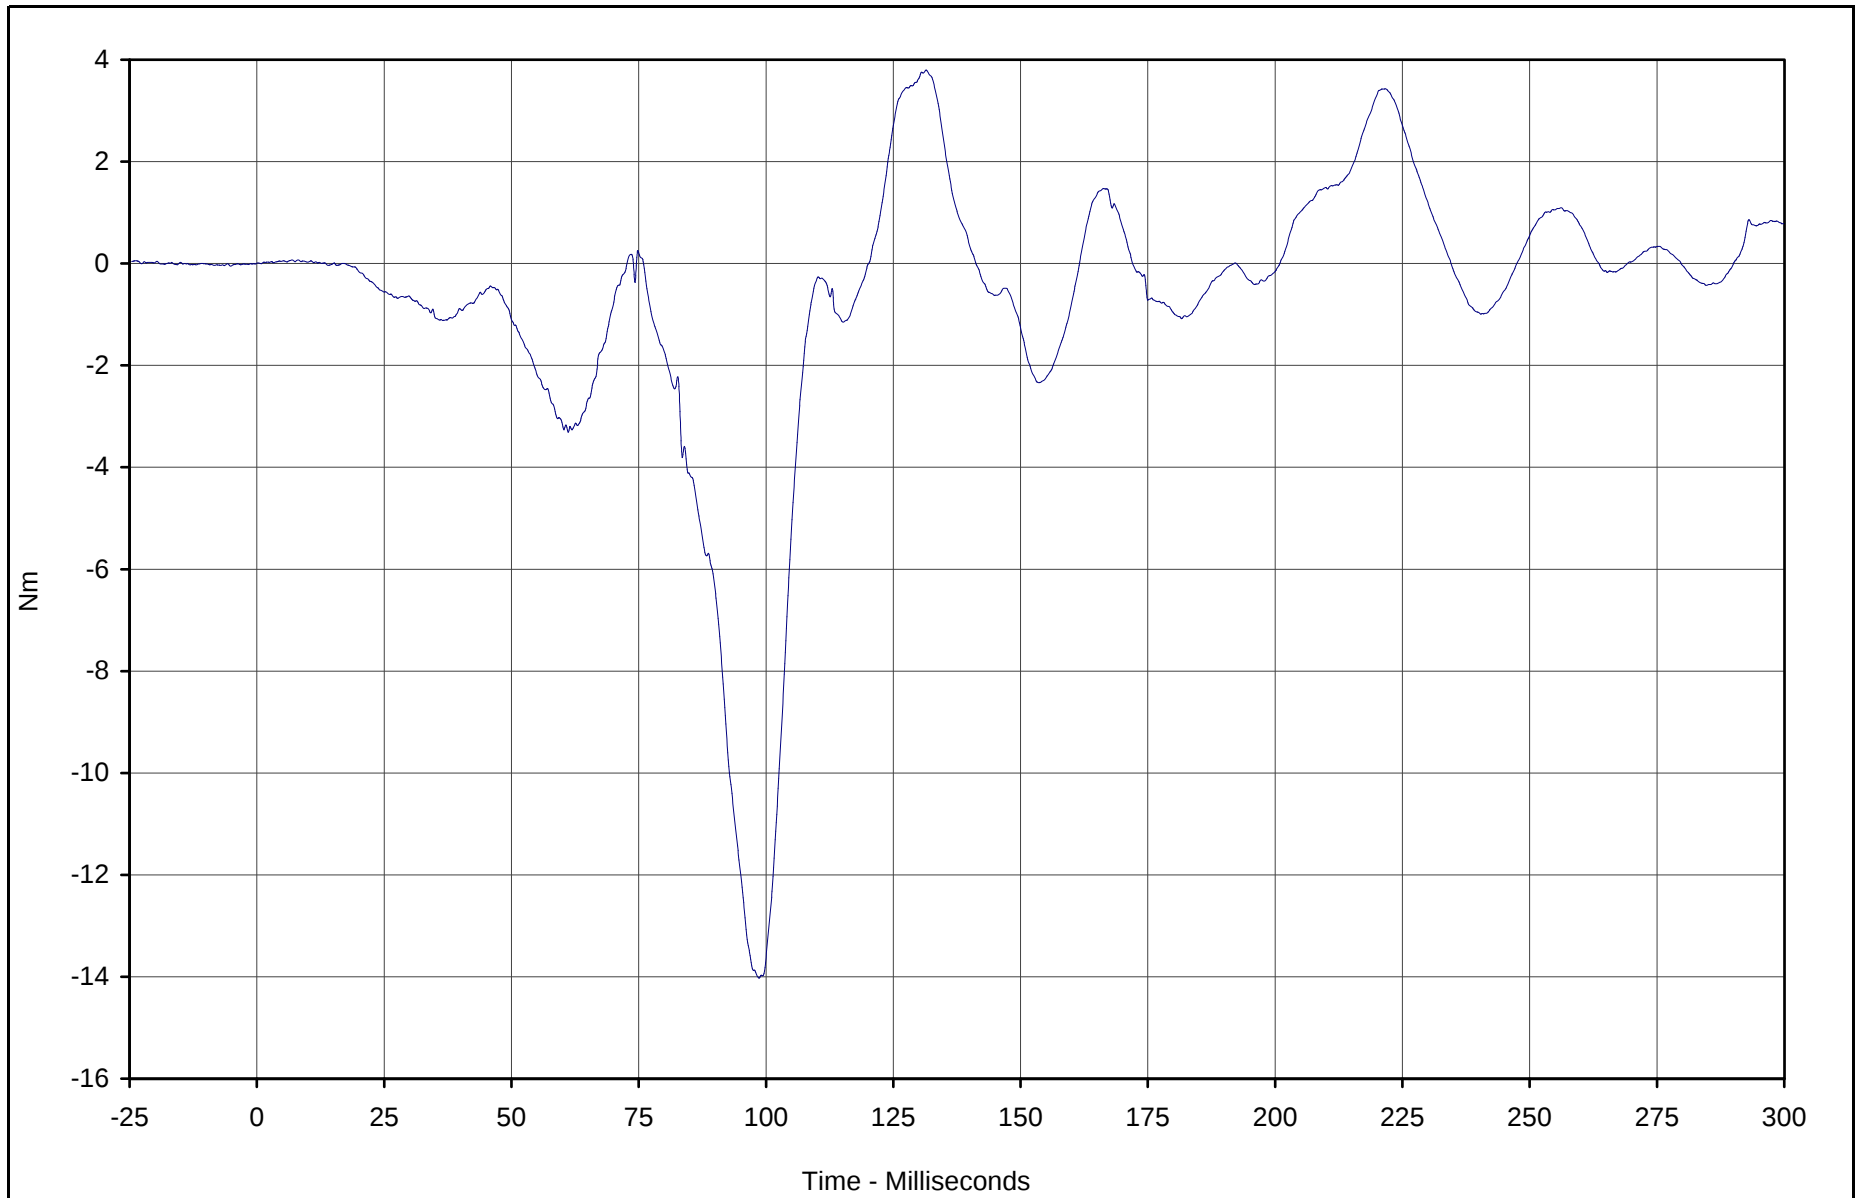

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Upper Neck Moment X	166	FIL	Nm	3.8	131.5	-14.0	98.6	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

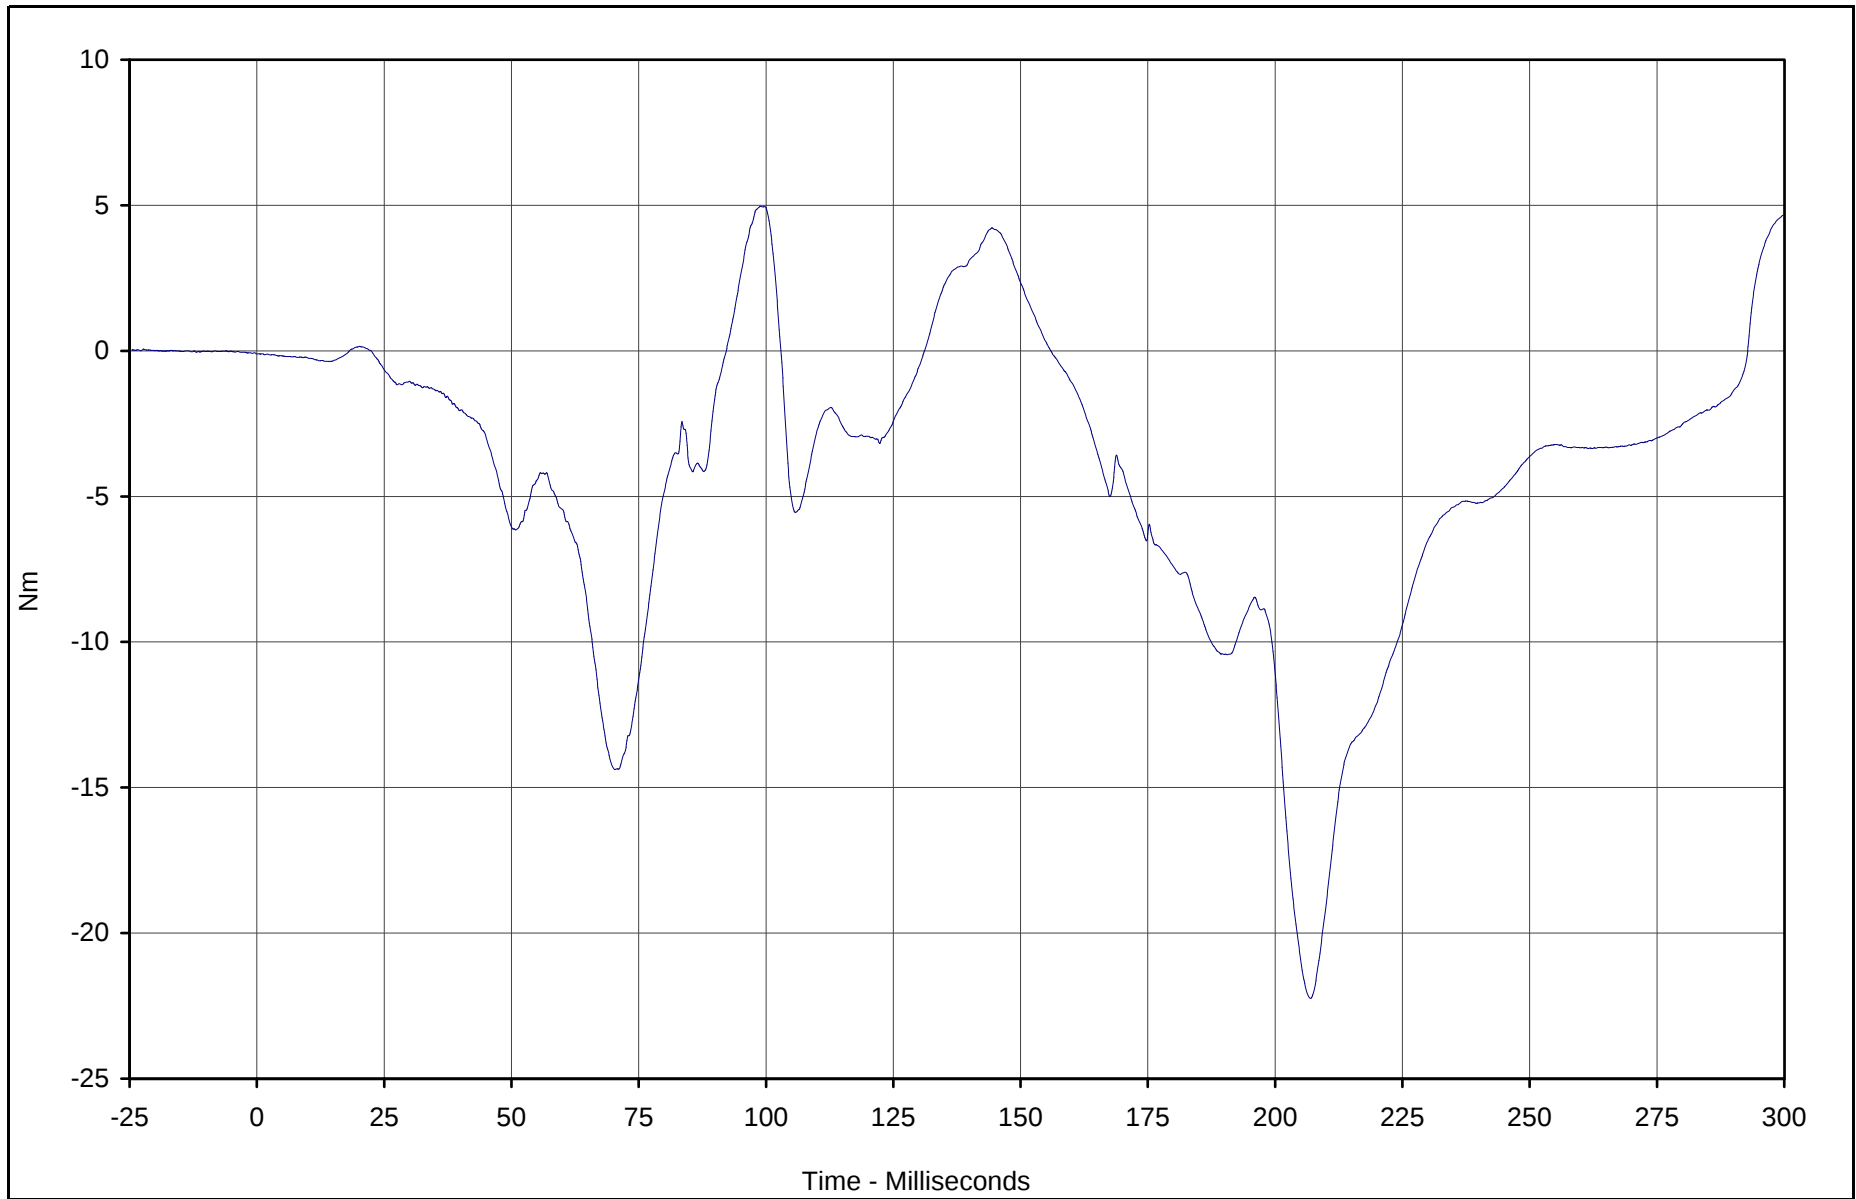

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Upper Neck Moment Y	167	FIL	Nm	5.0	99.0	-22.2	207.0	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

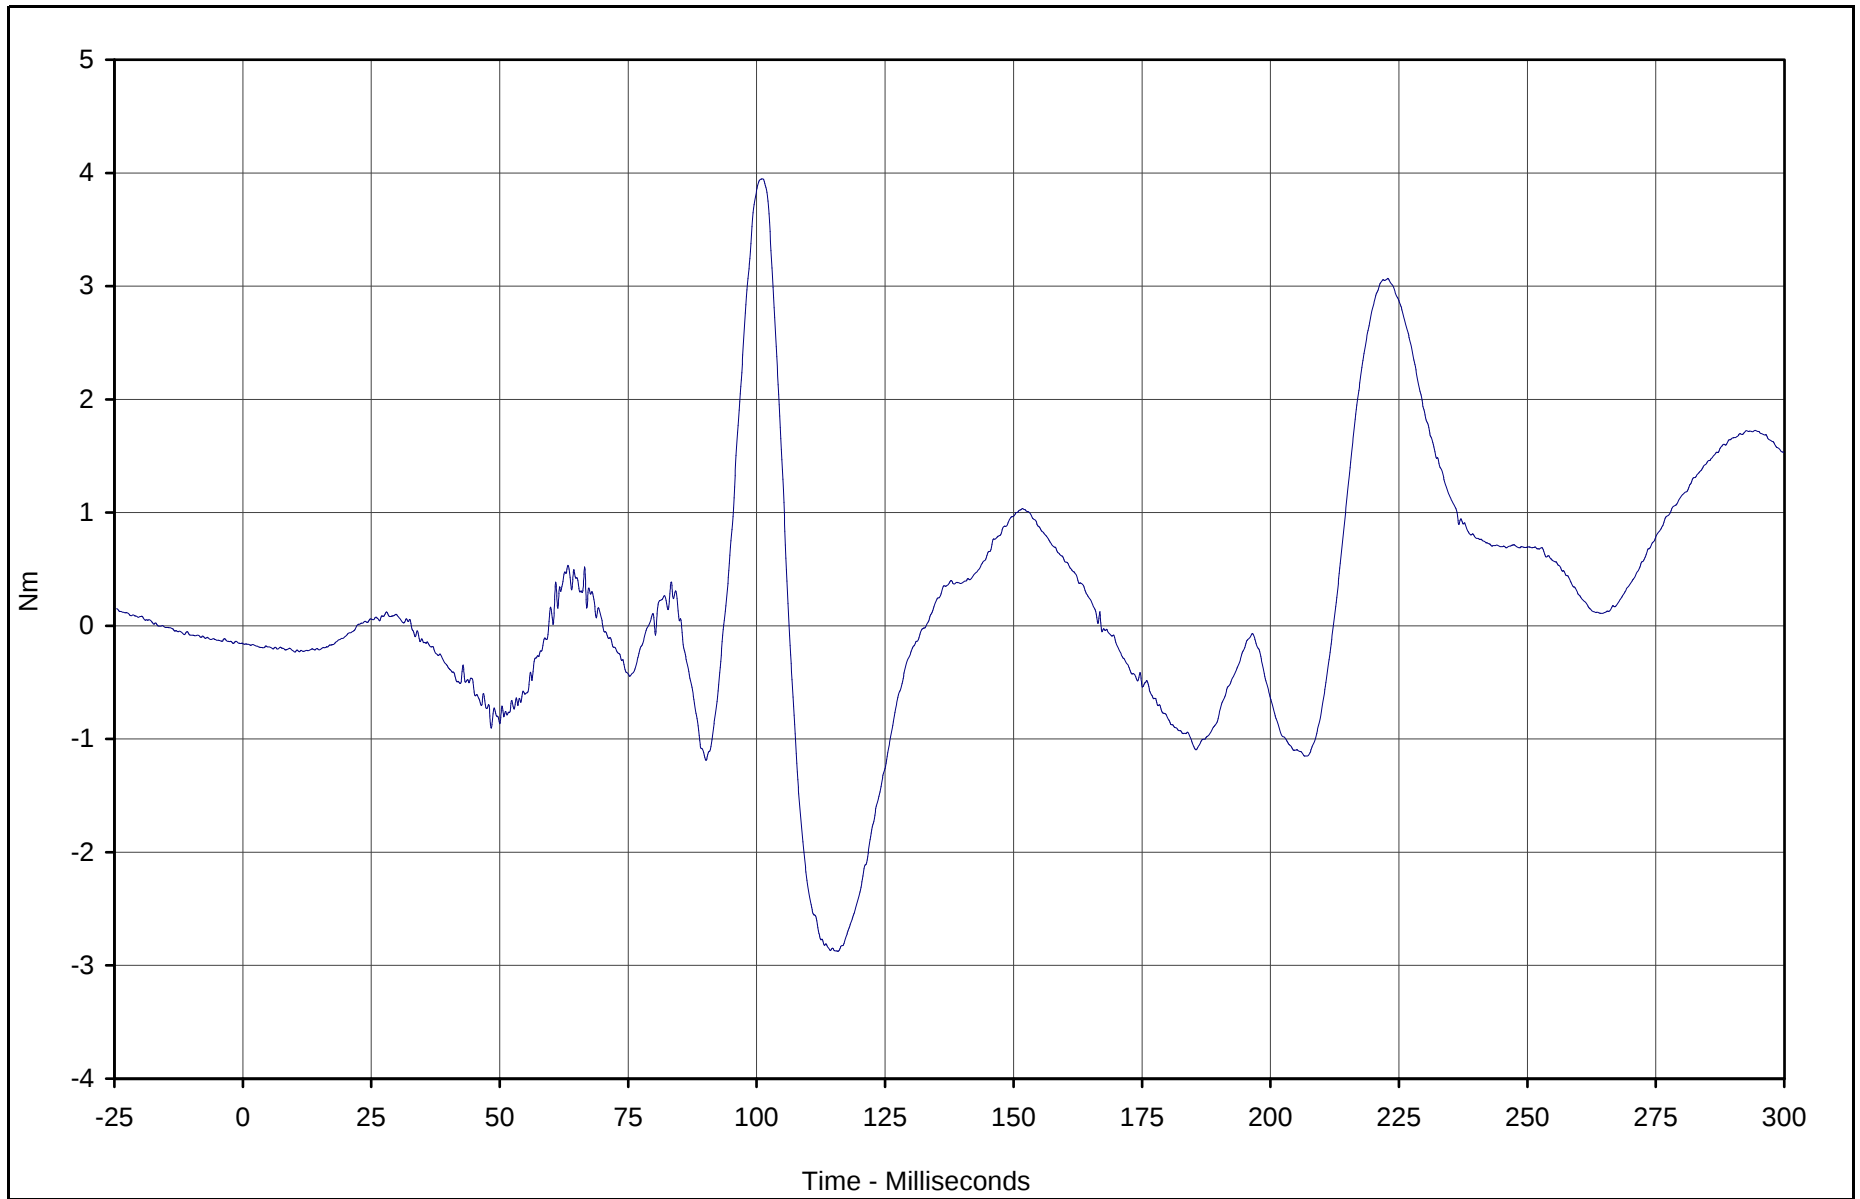

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Upper Neck Moment Z	168	FIL	Nm	3.9	101.2	-2.9	115.8	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

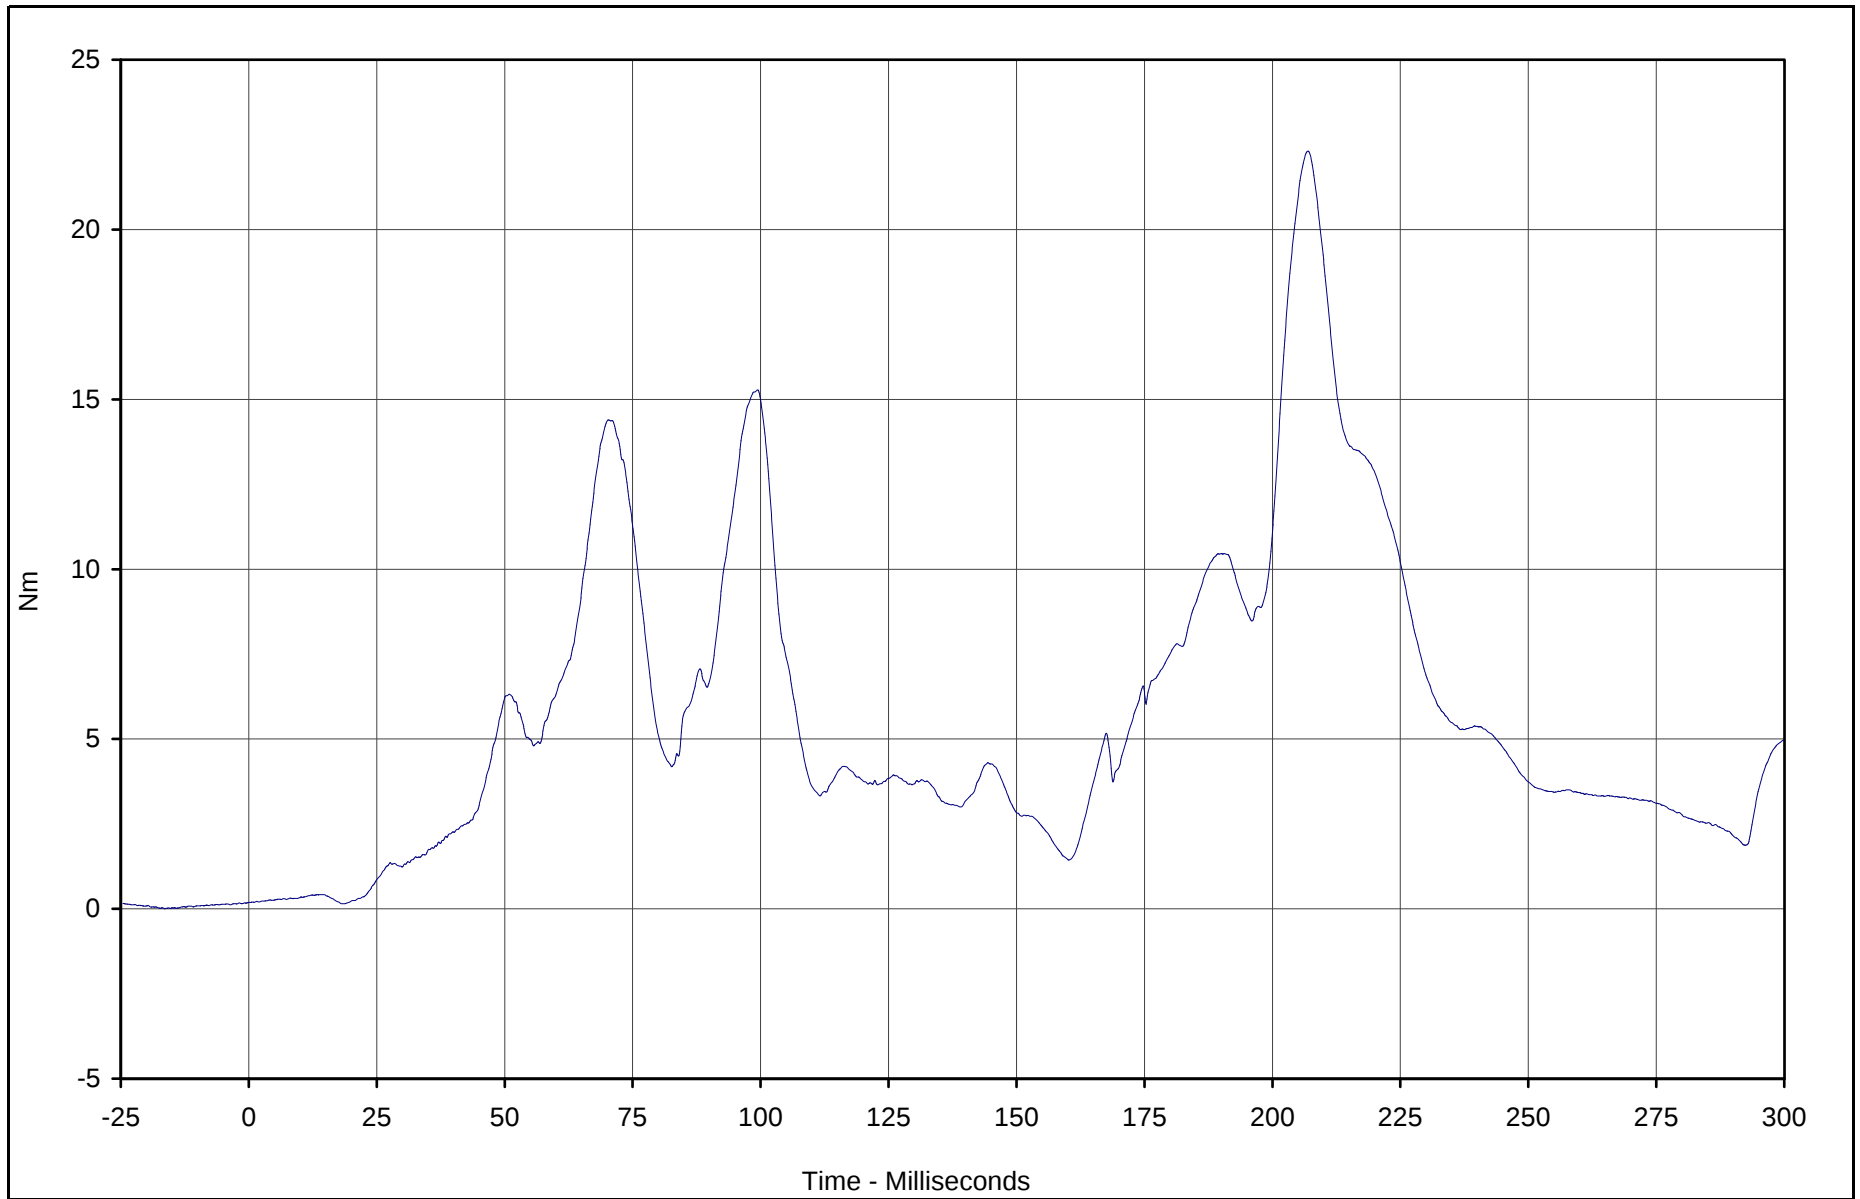

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Upper Neck Mom Res.	166	RES	Nm	22.3	207.0	0.1	18.2	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

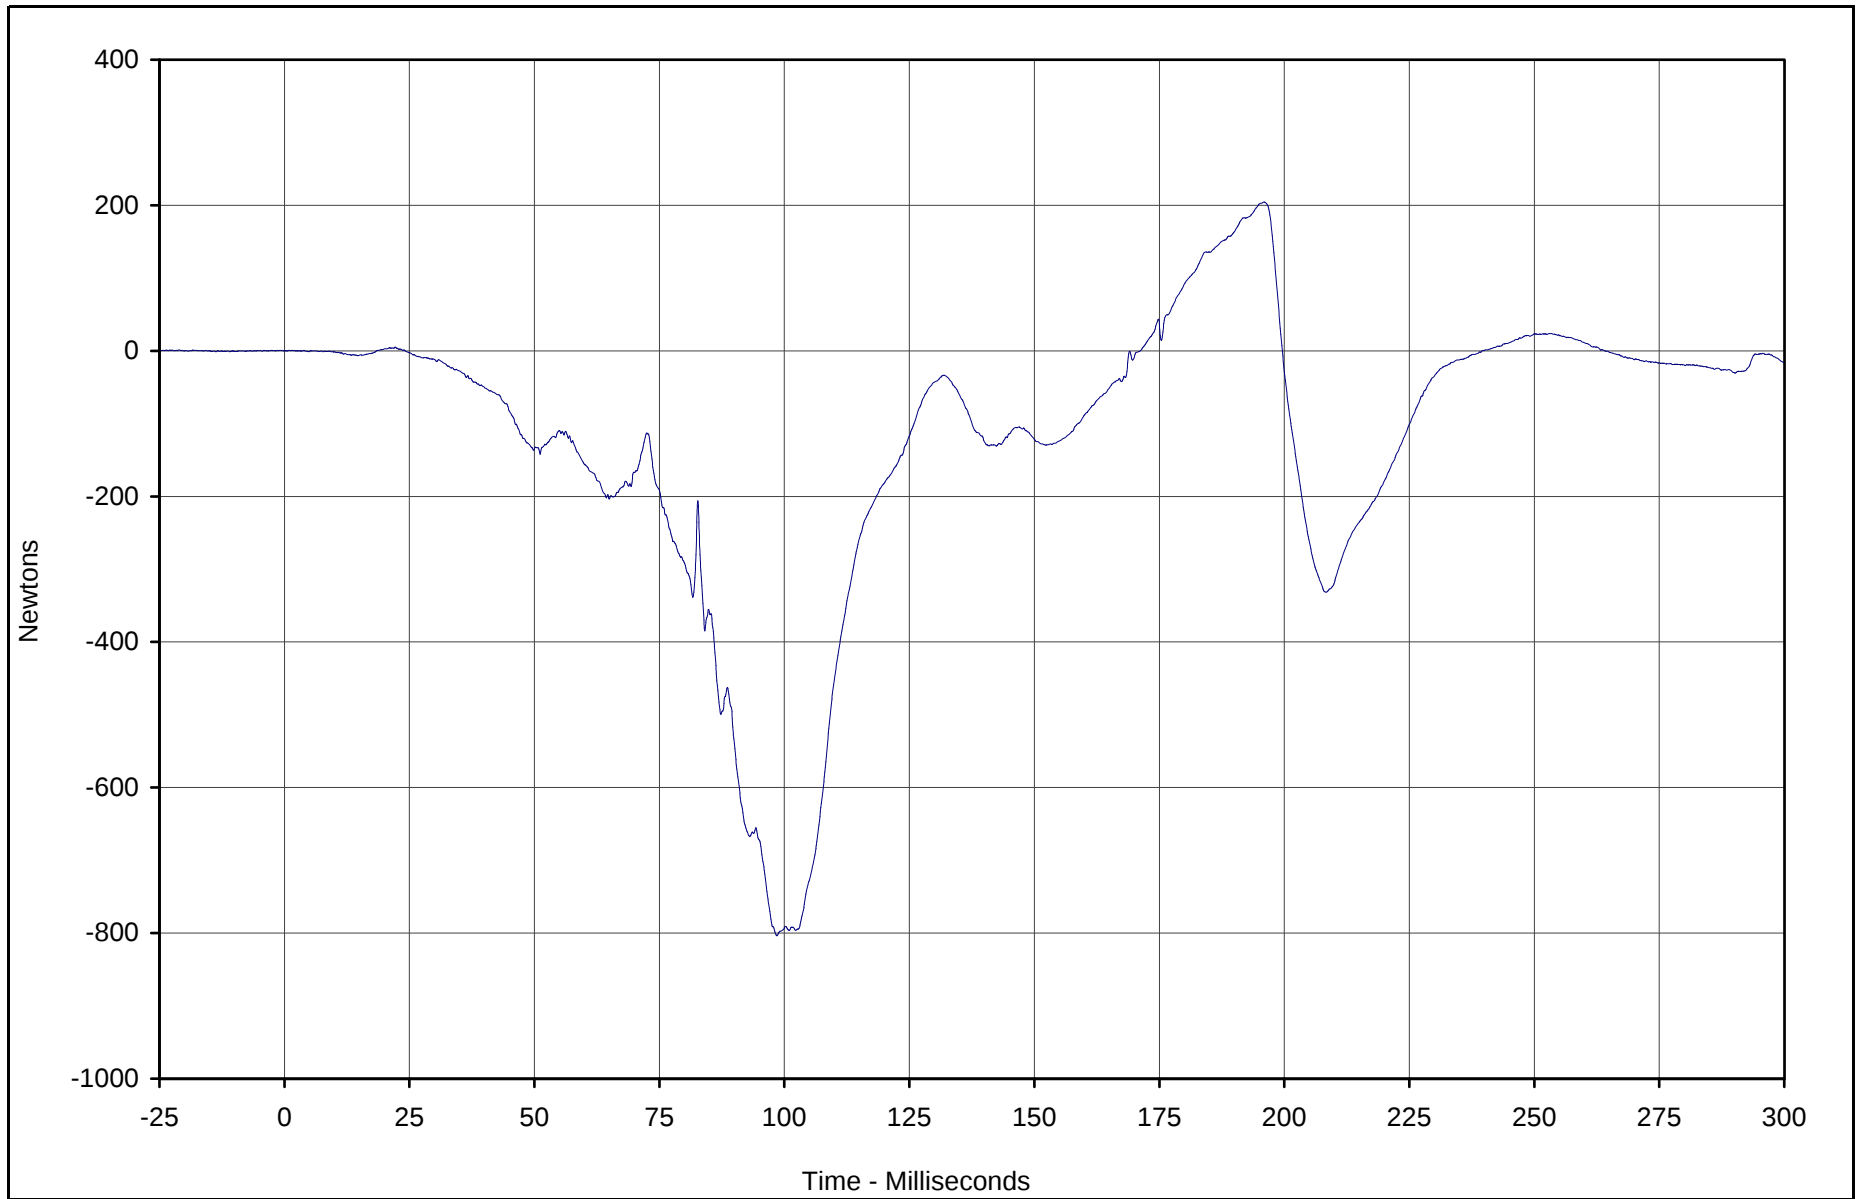

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Lower Neck Force X	169	FIL	Newtons	204.4	196.0	-803.4	98.5	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

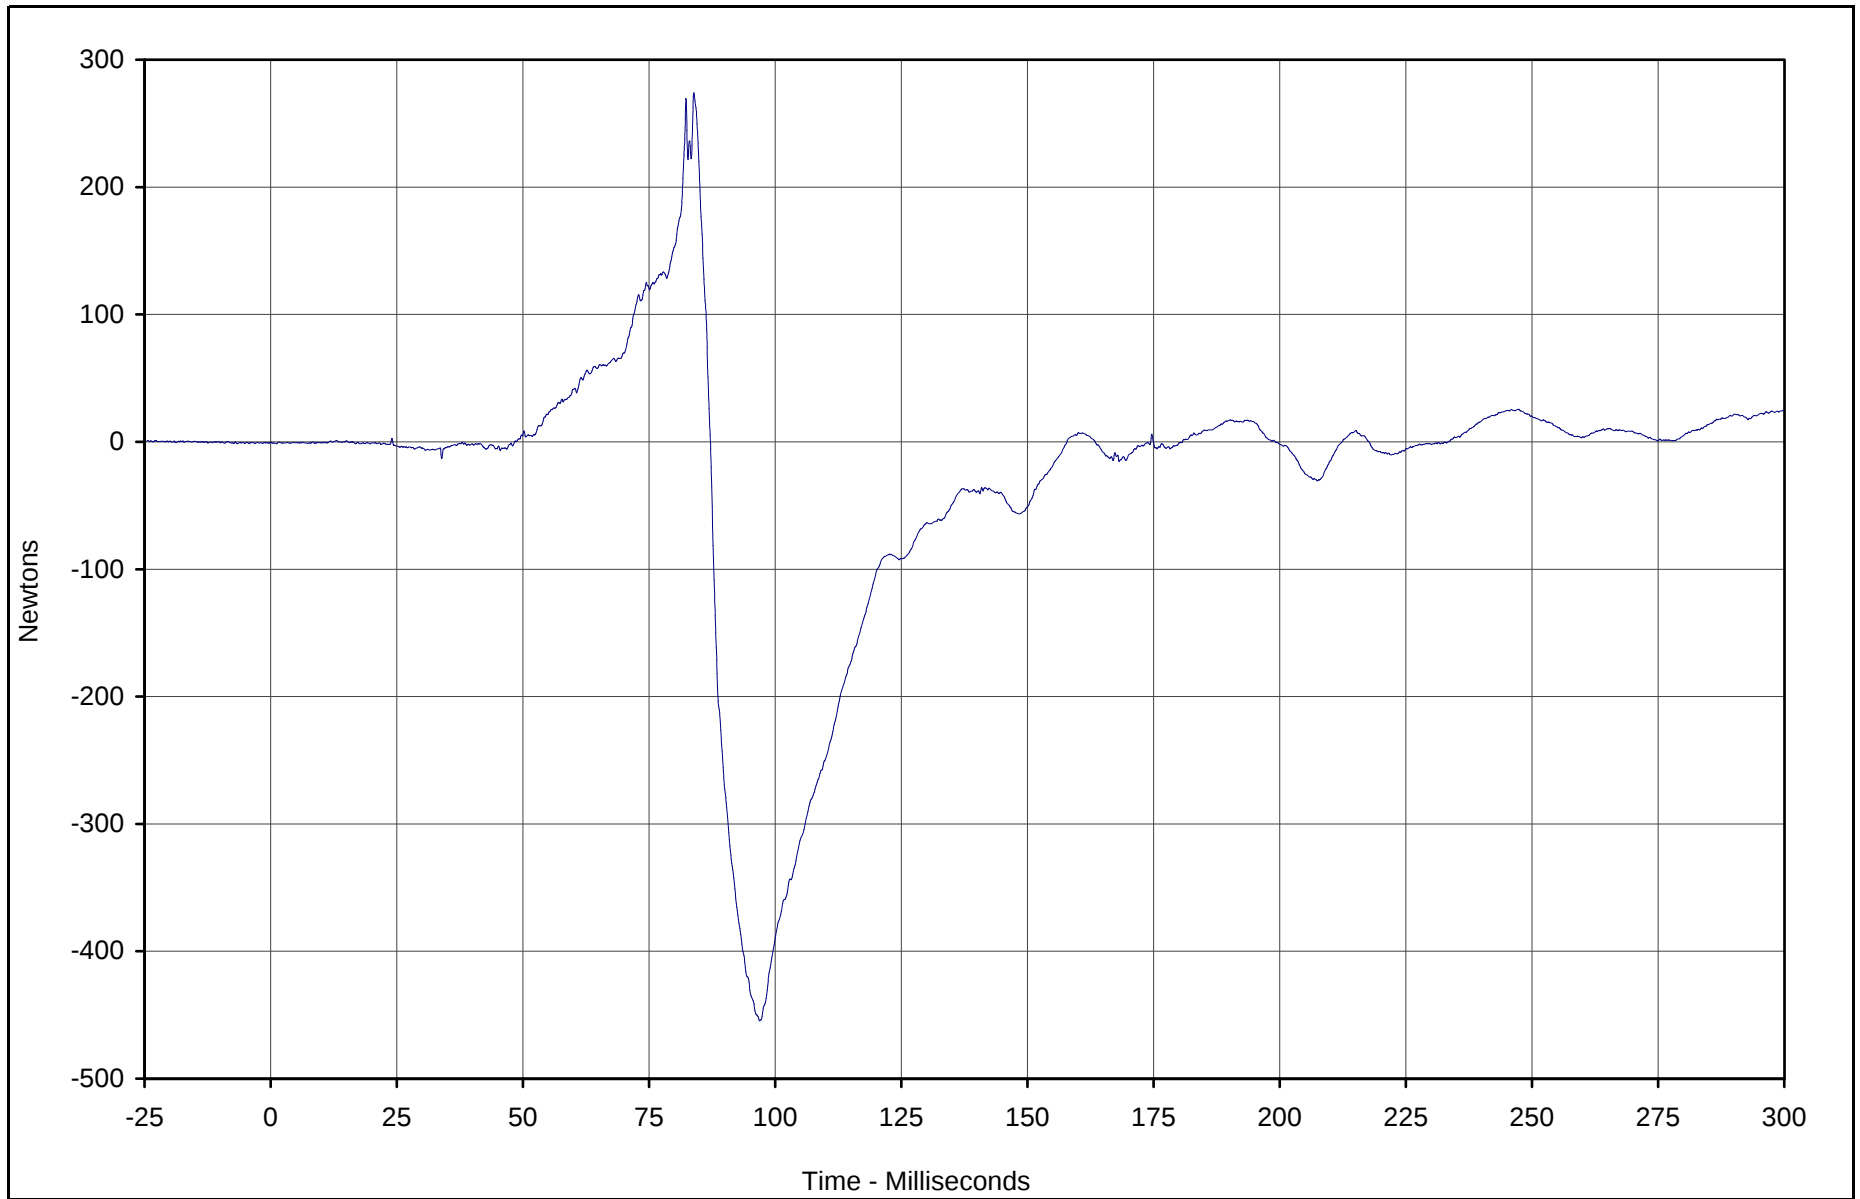

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Lower Neck Force Y	170	FIL	Newtons	274.1	83.9	-454.5	96.9	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

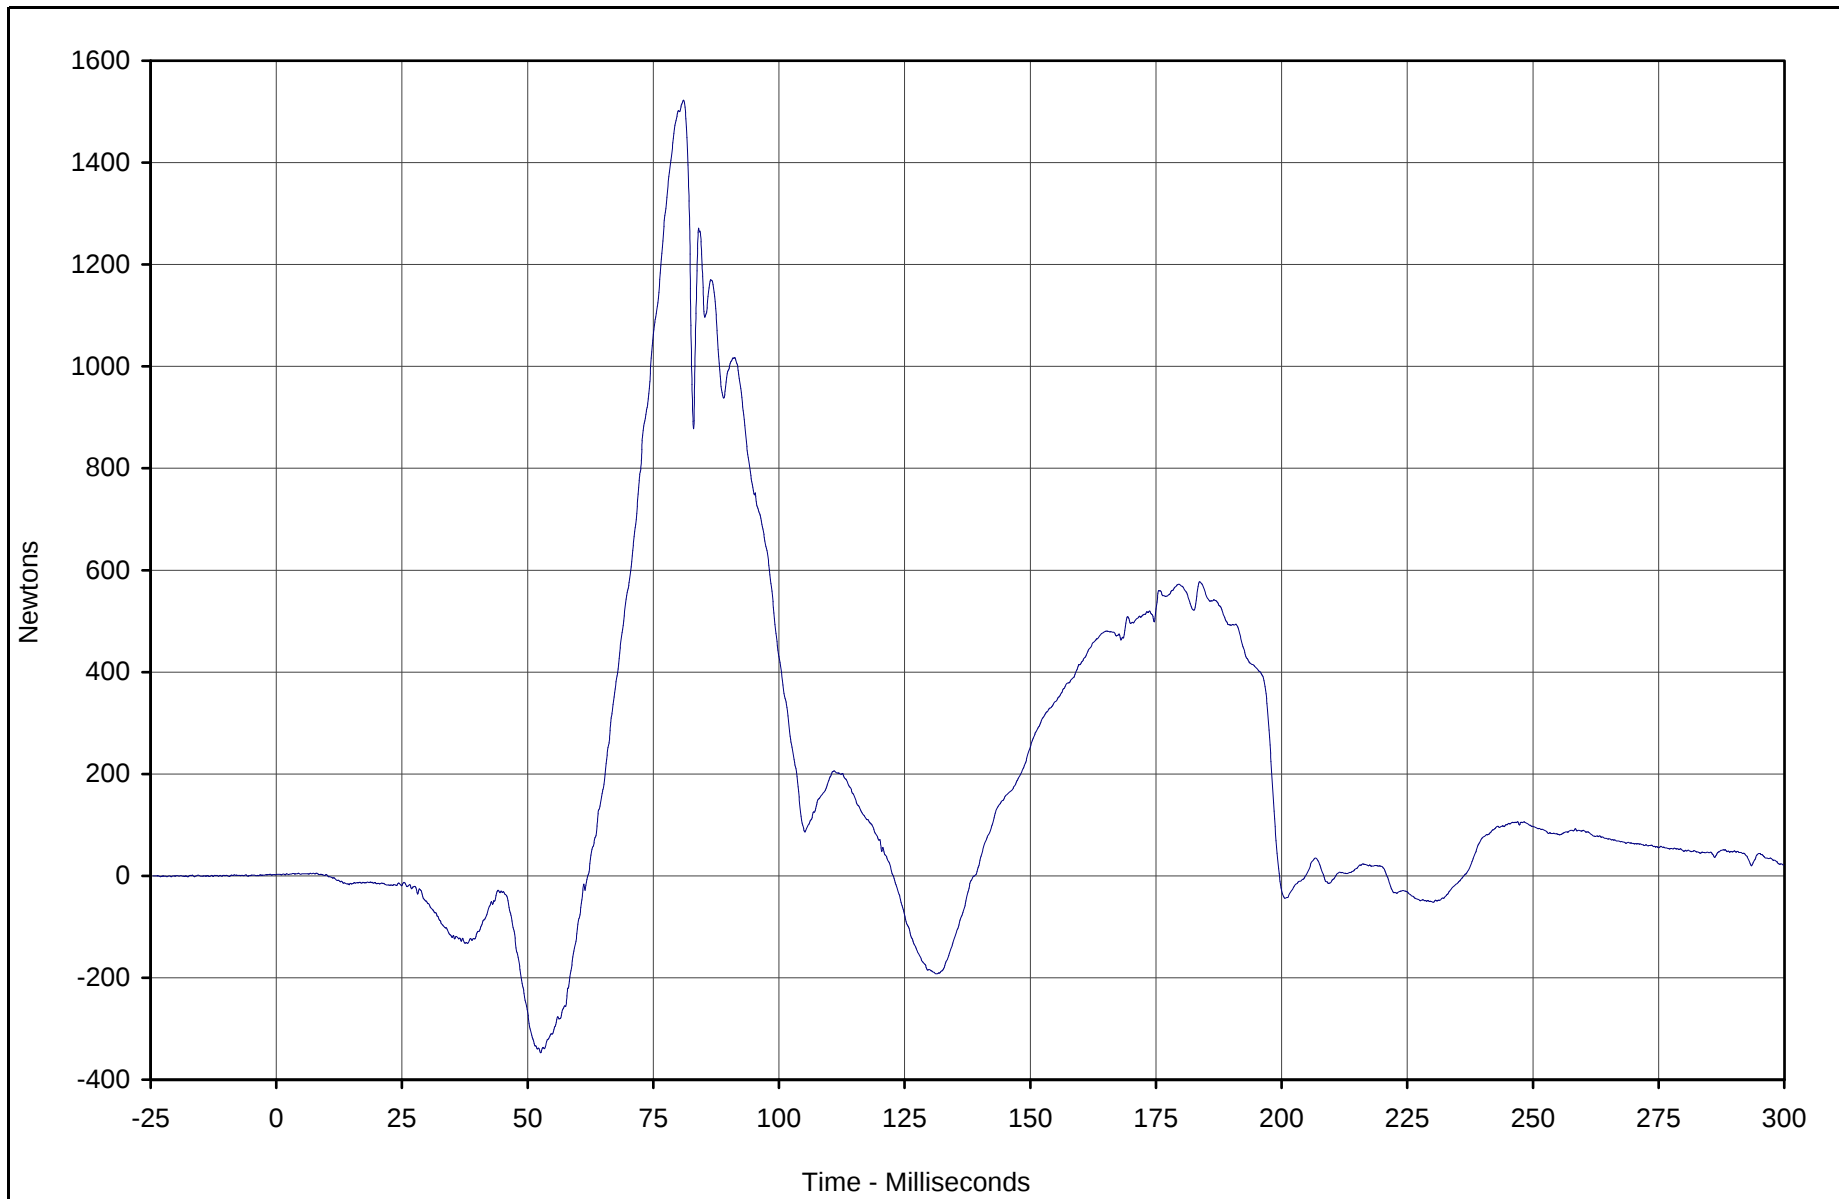

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Lower Neck Force Z	171	FIL	Newtons	1522.4	81.0	-347.3	52.6	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

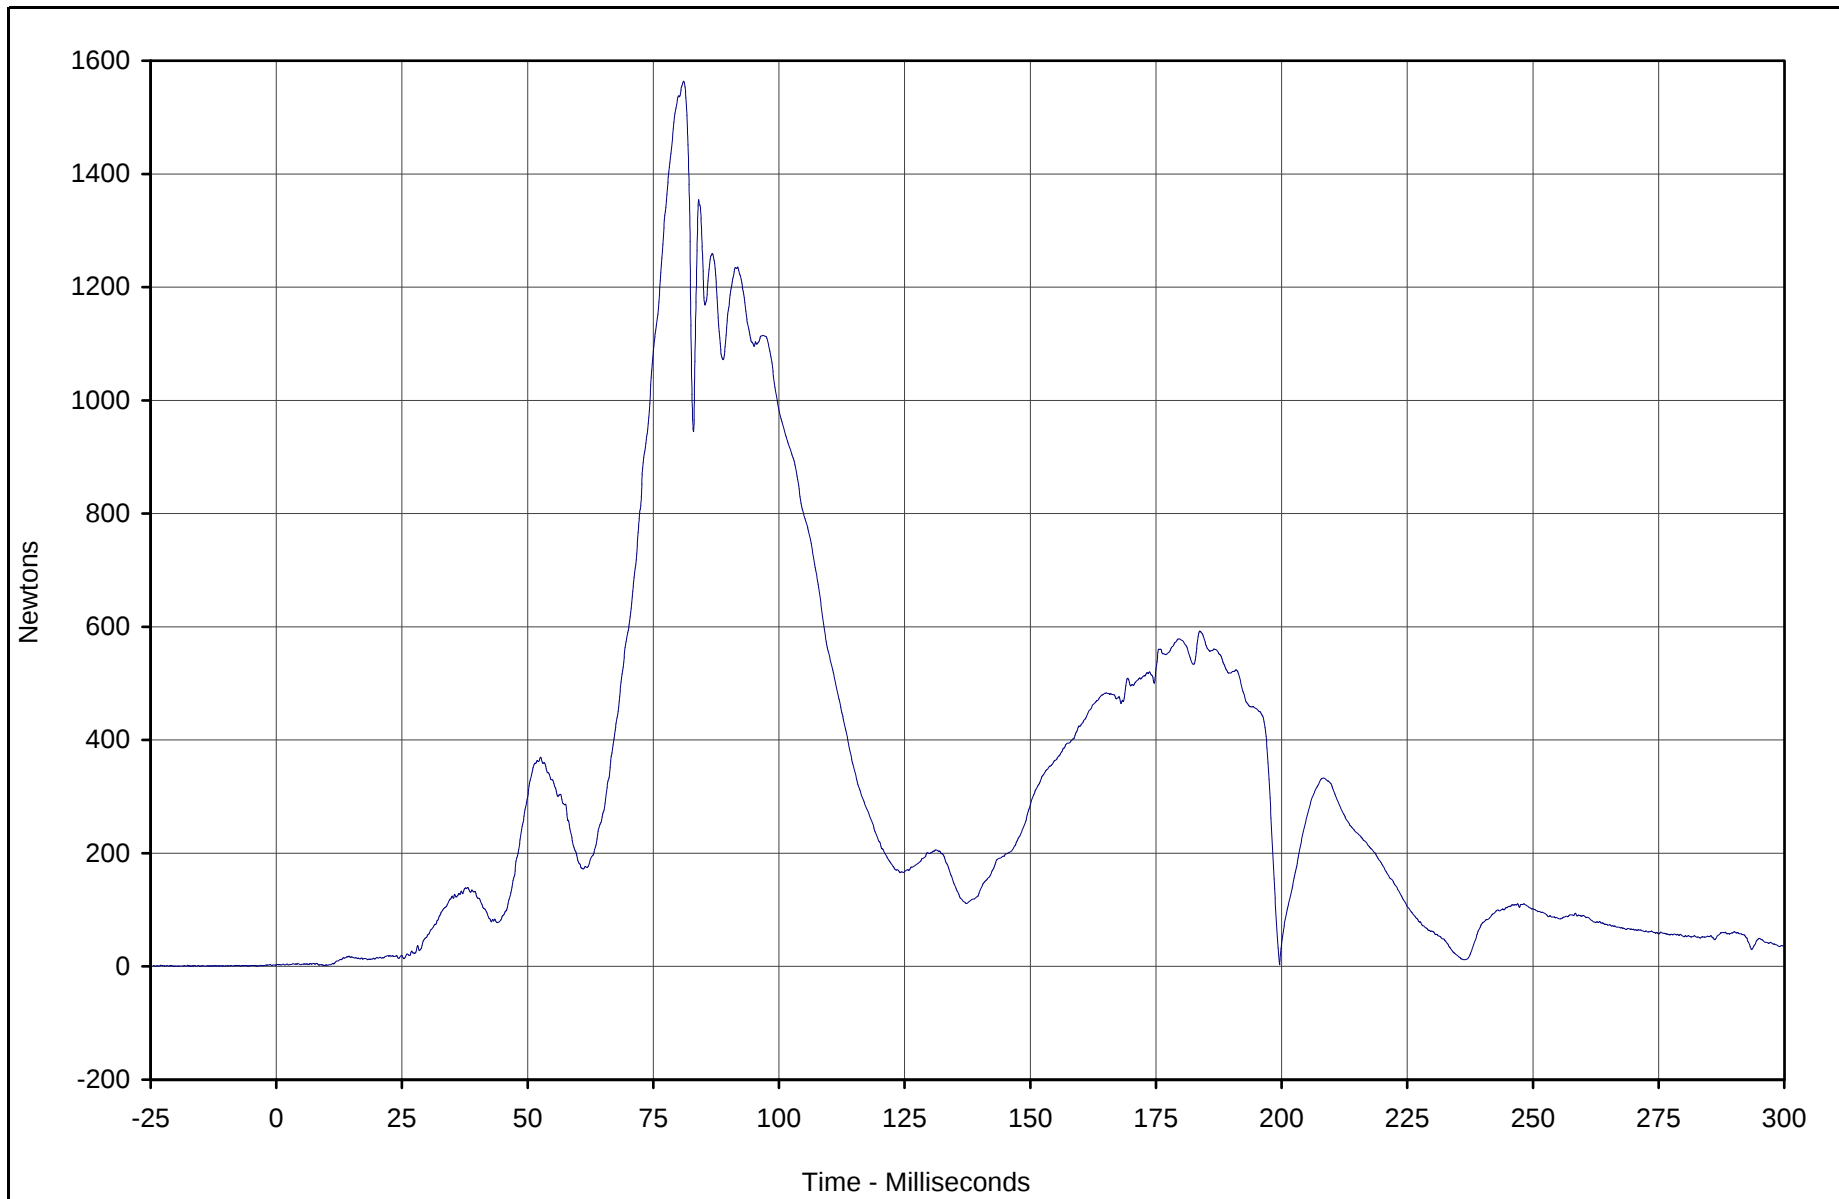

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Lower Neck Force Res.	169	RES	Newtons	1563.5	81.0	1.6	9.6	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

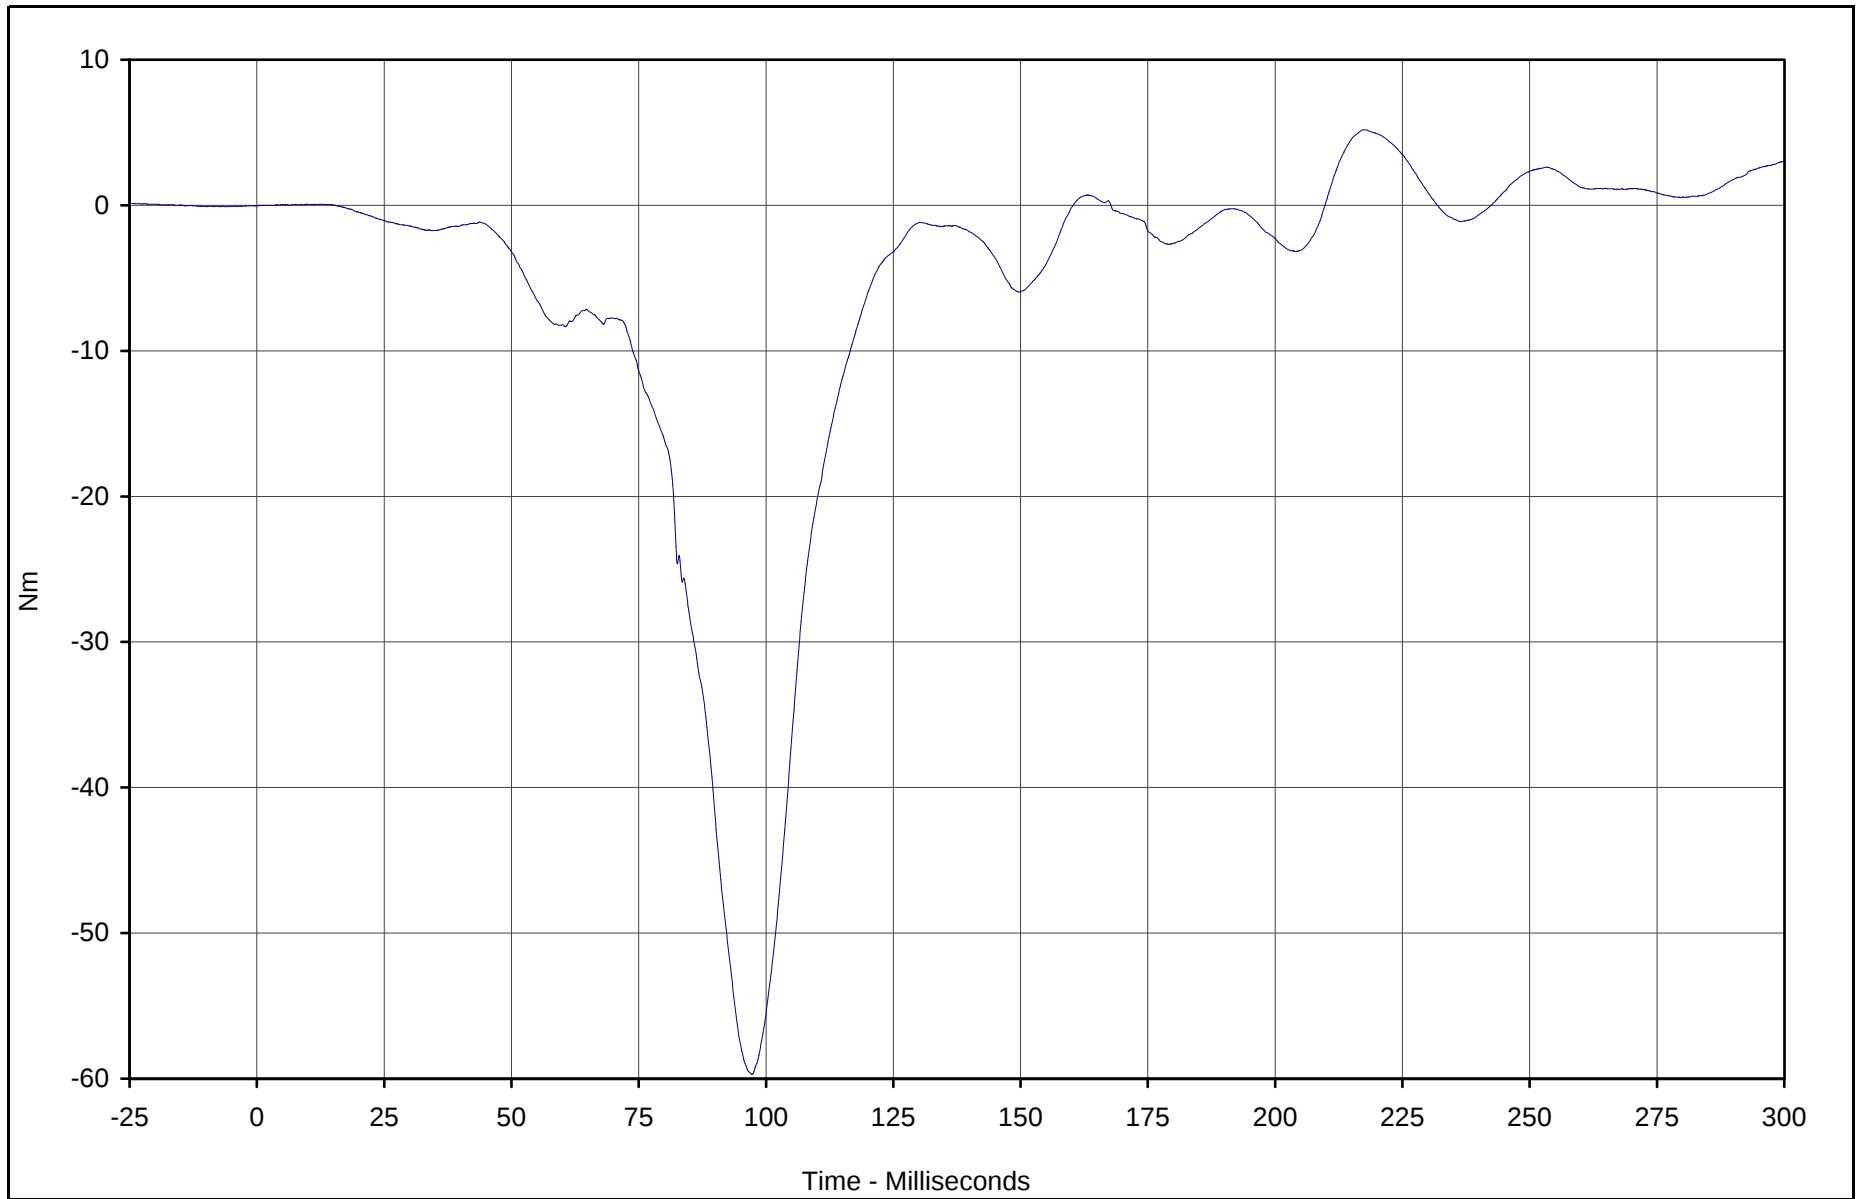

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Lower Neck Moment X	172	FIL	Nm	5.2	217.3	-59.7	97.3	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

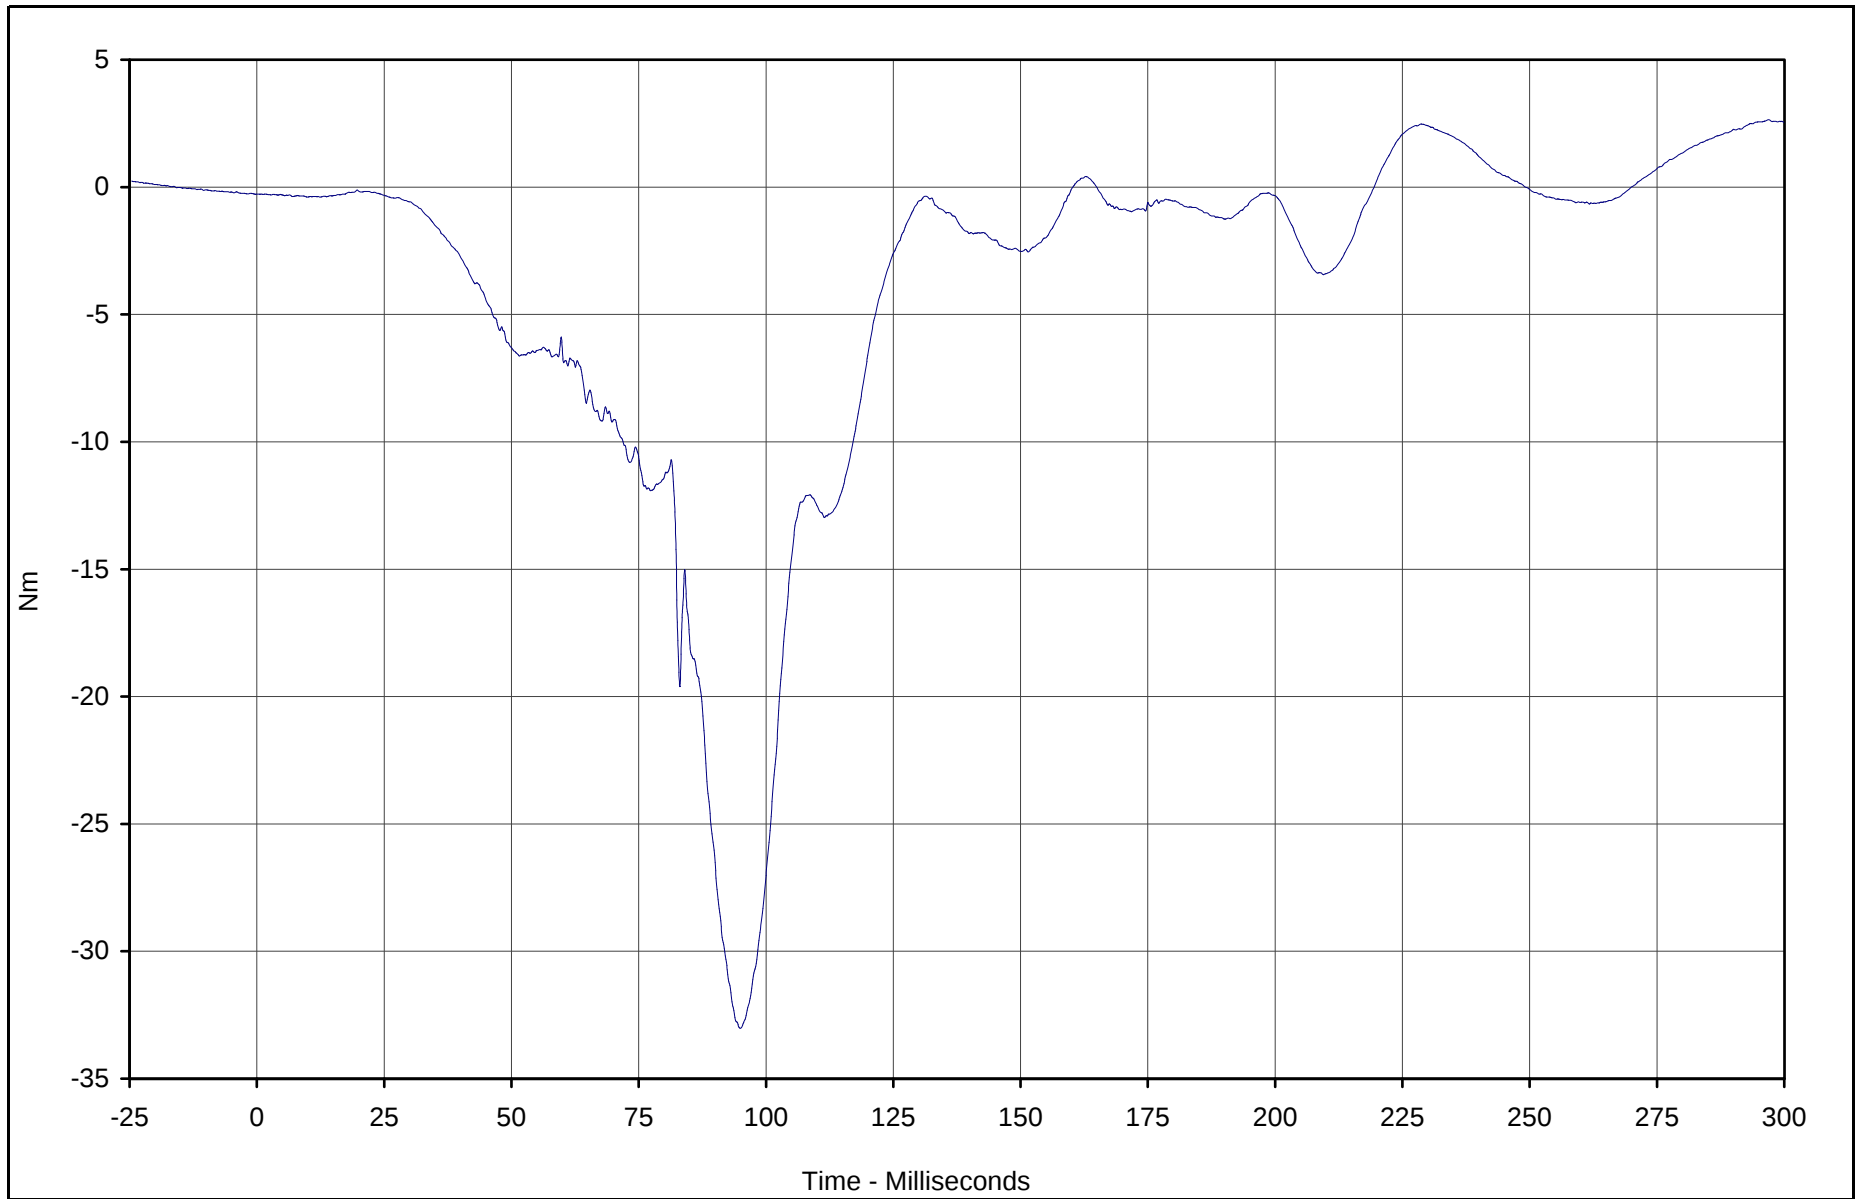

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Lower Neck Moment Y	173	FIL	Nm	2.6	296.9	-33.0	95.0	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

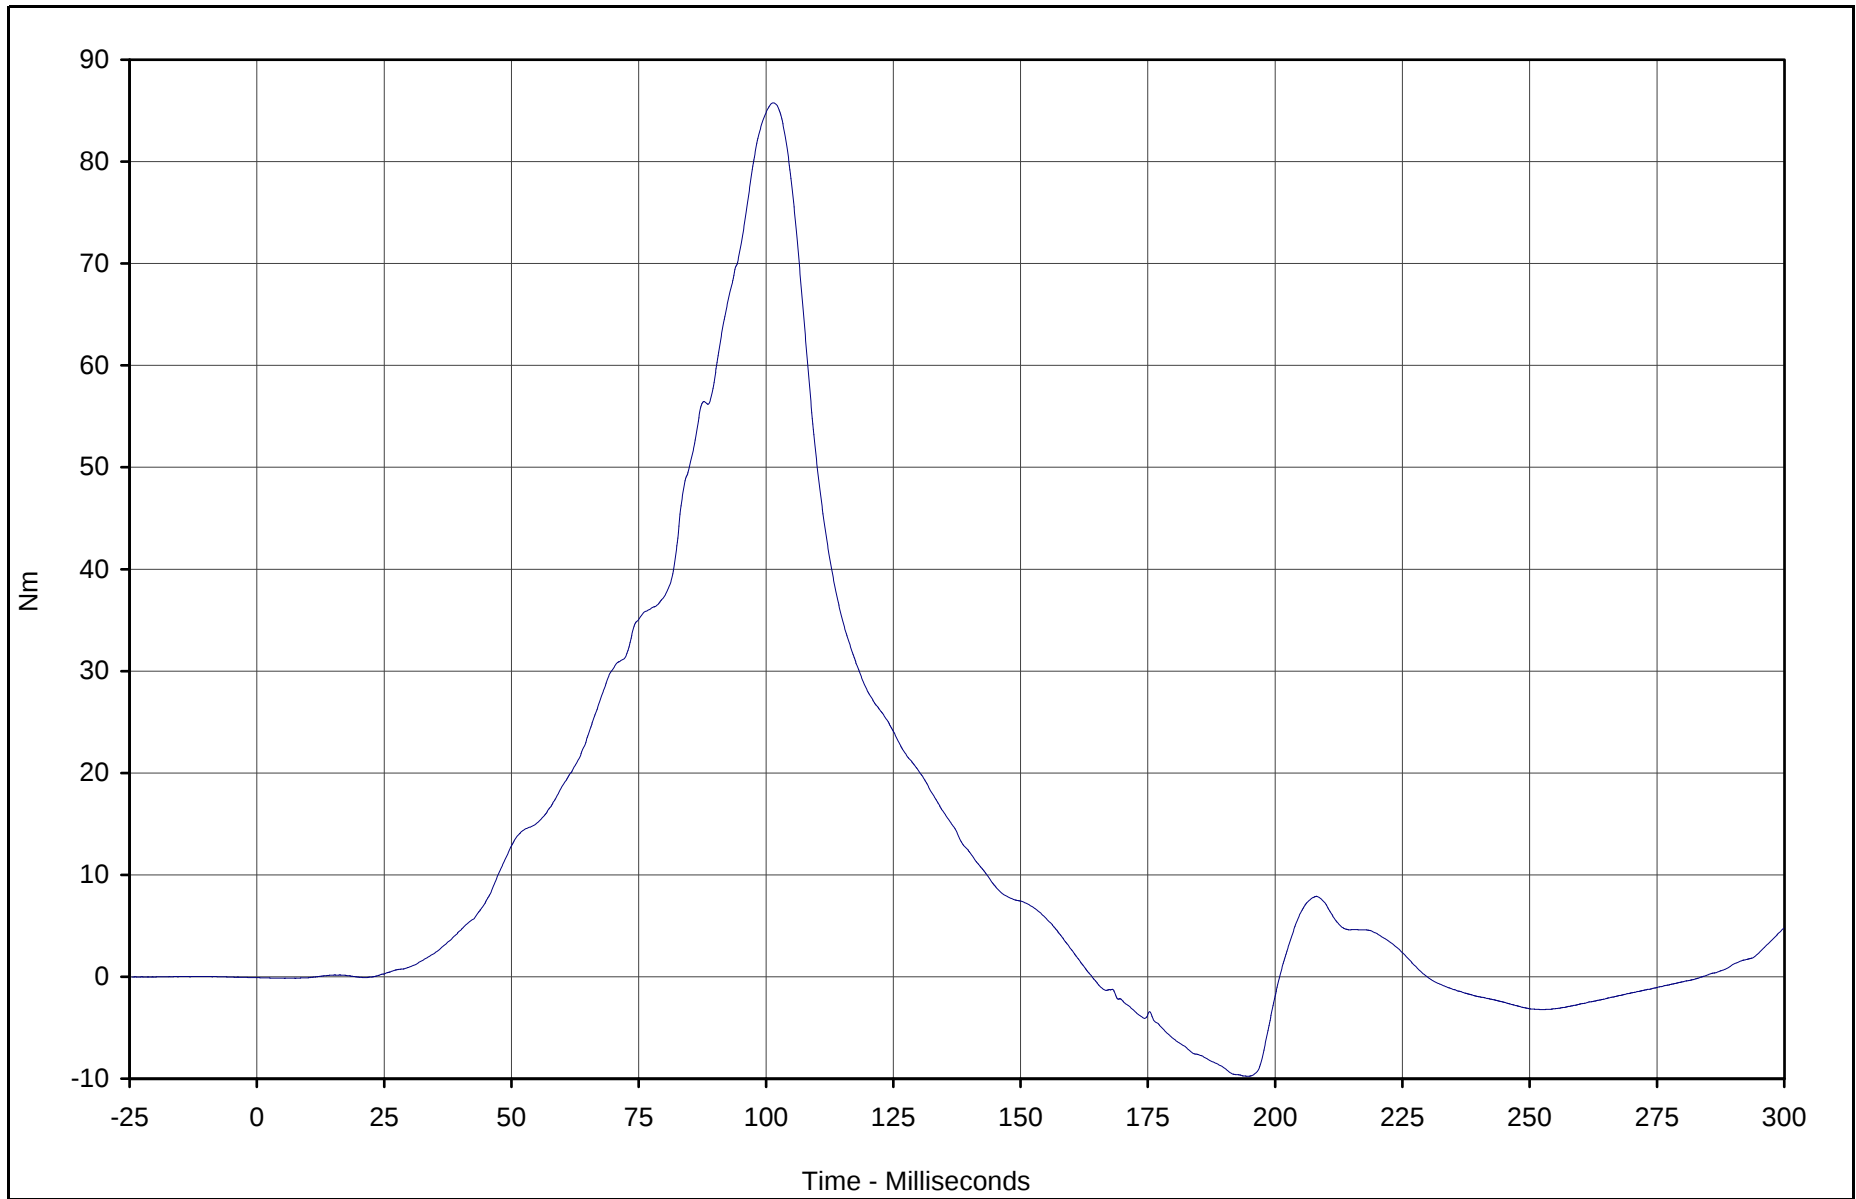

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Lower Neck Moment Z	174	FIL	Nm	85.8	101.4	-9.8	194.5	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

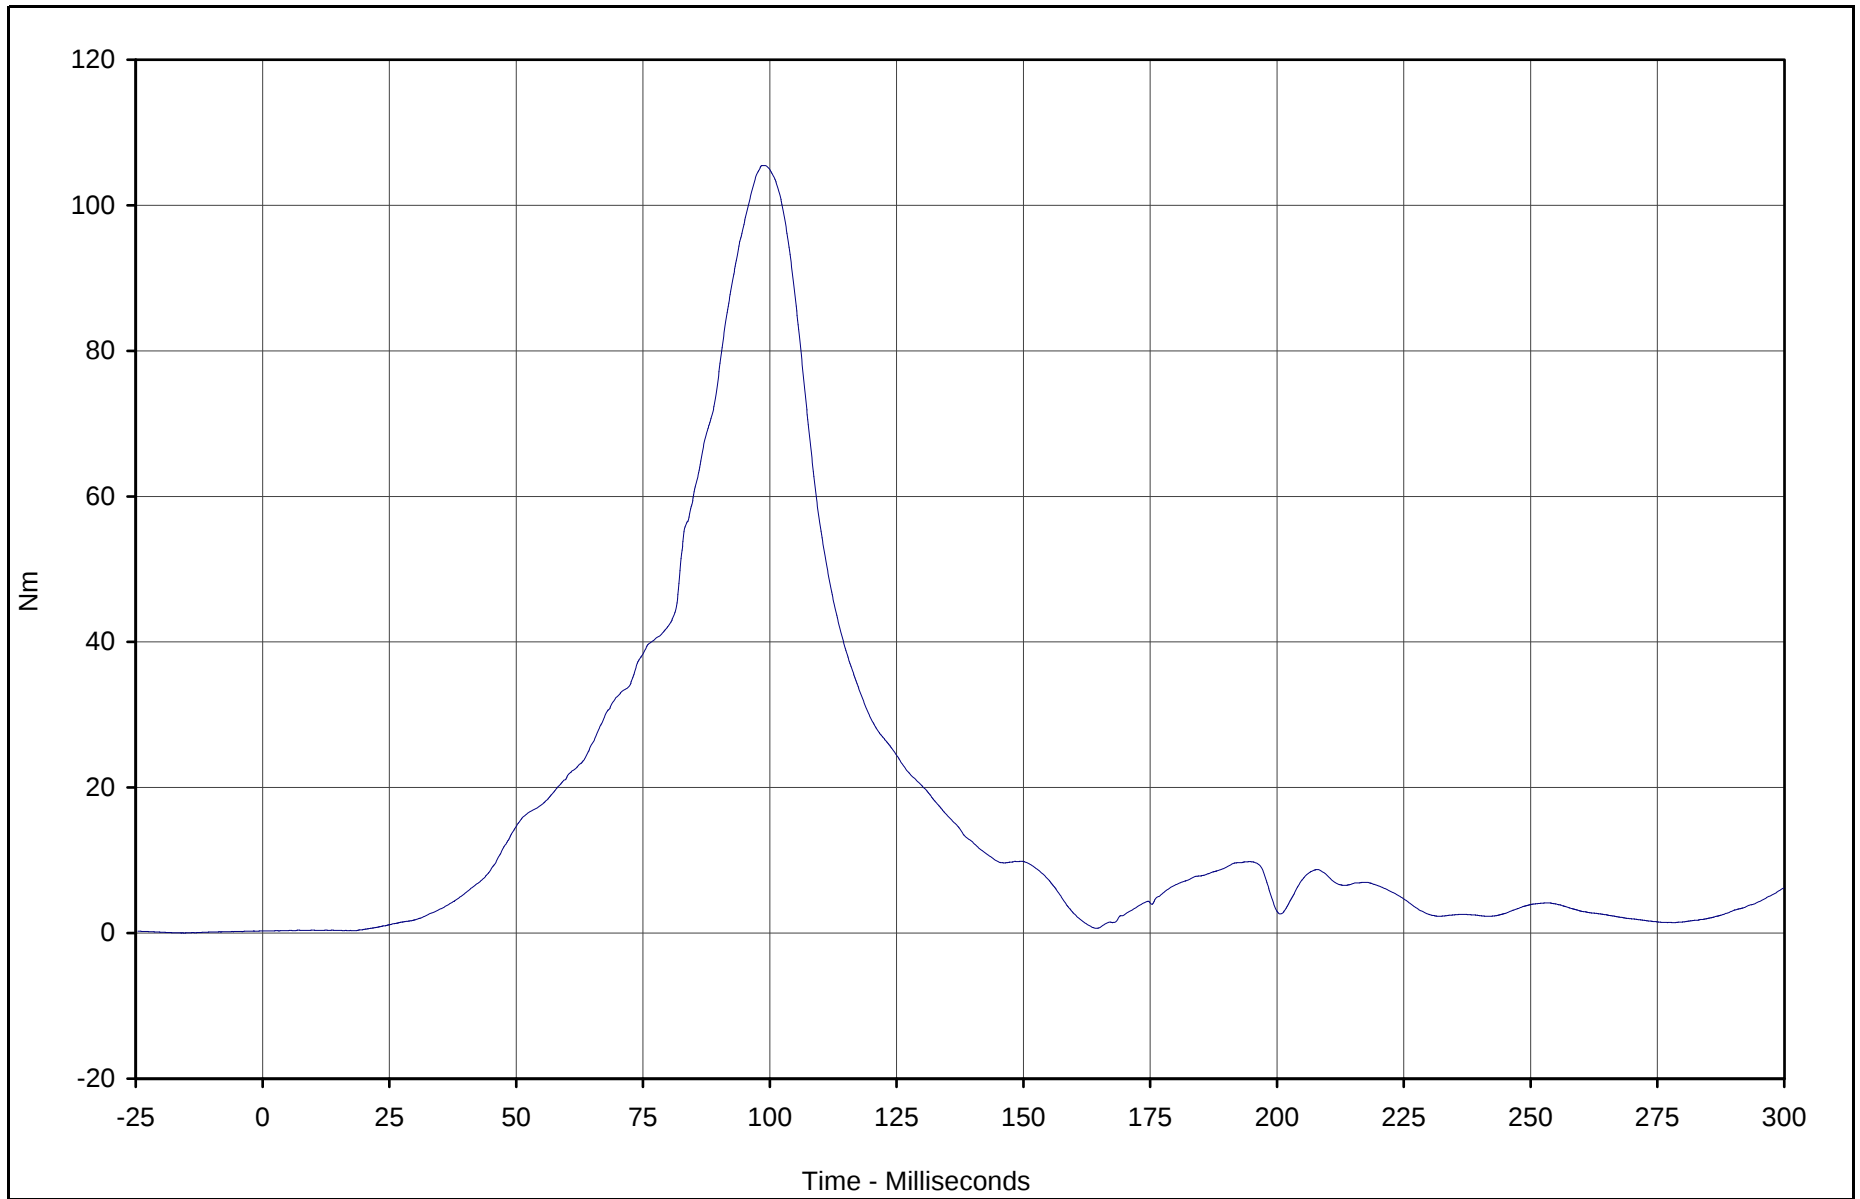

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Lower Neck Mom Res.	172	RES	Nm	105.5	98.7	0.3	0.2	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

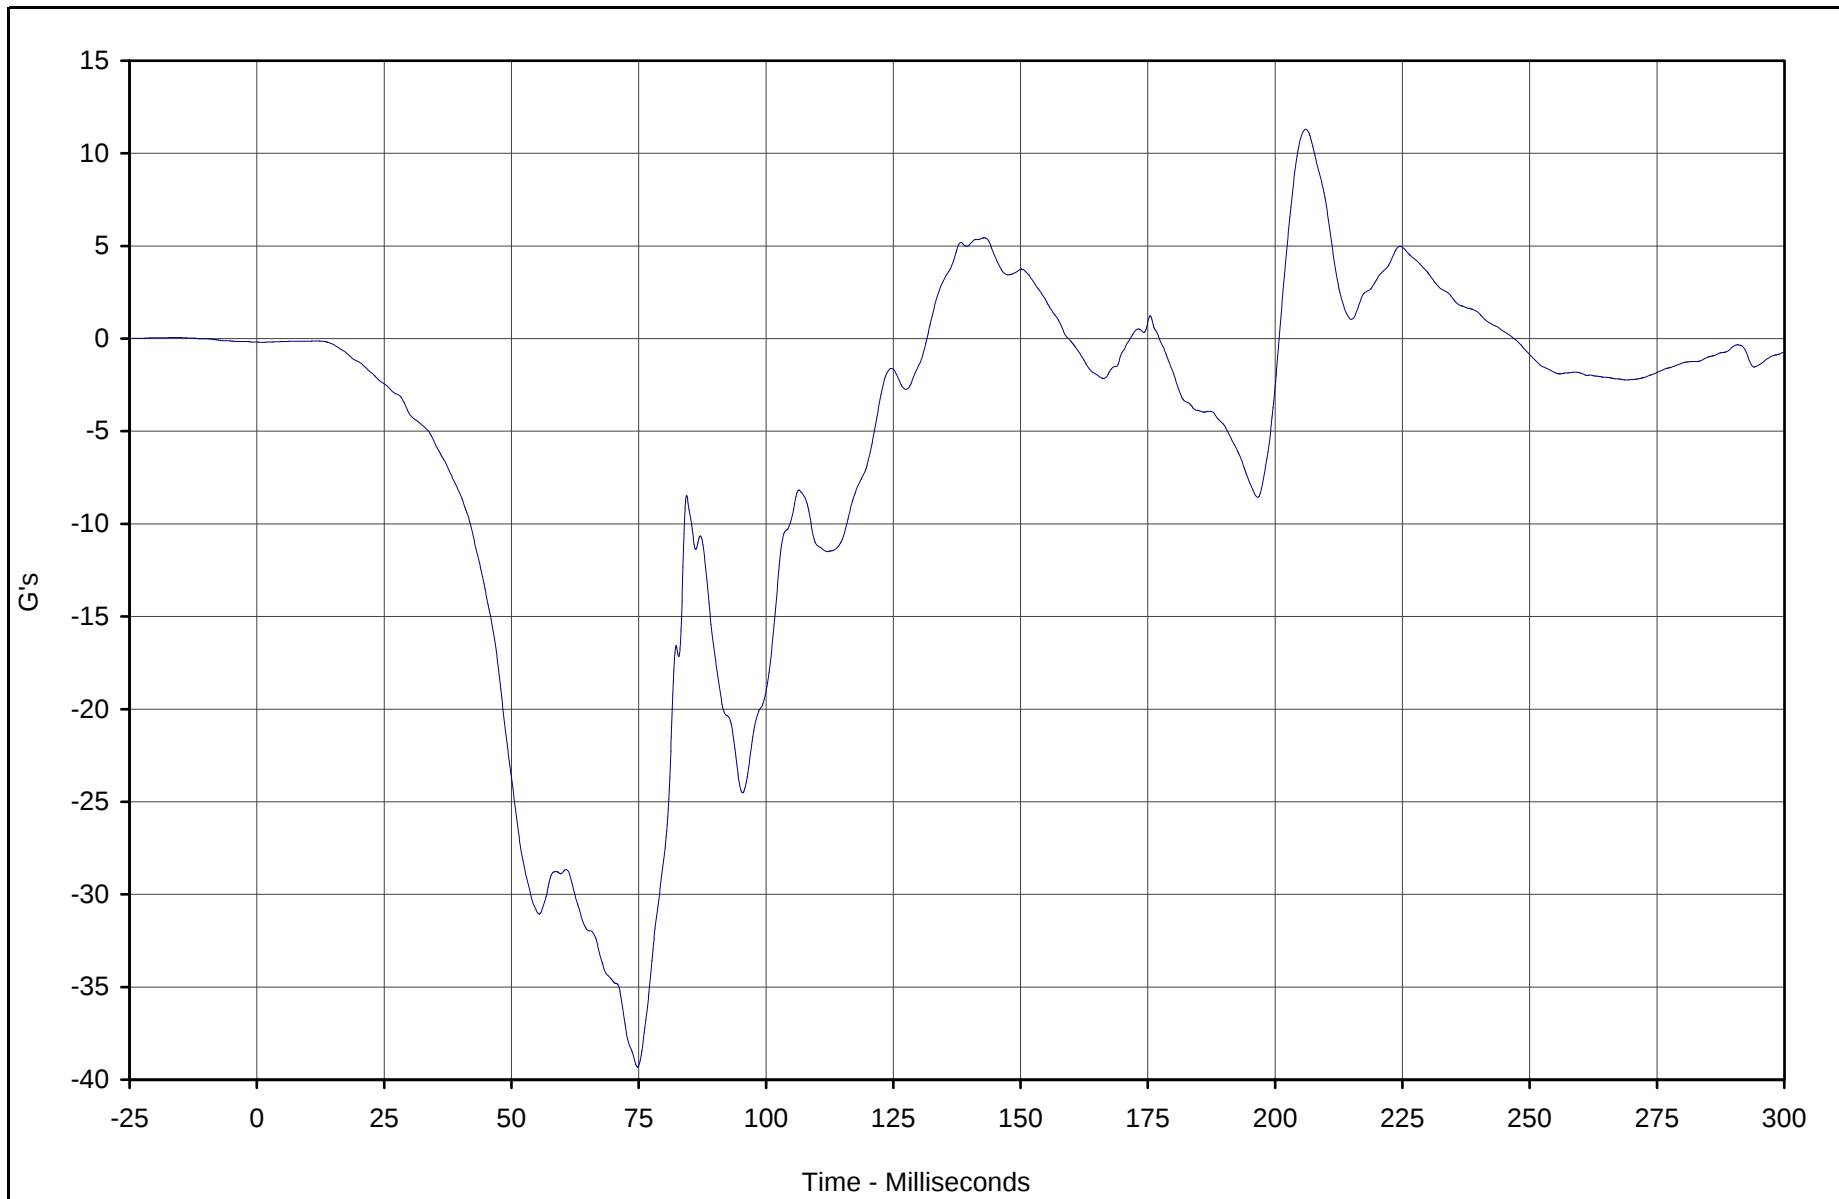

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Chest X	175	FIL	G's	11.3	206.0	-39.3	74.8	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

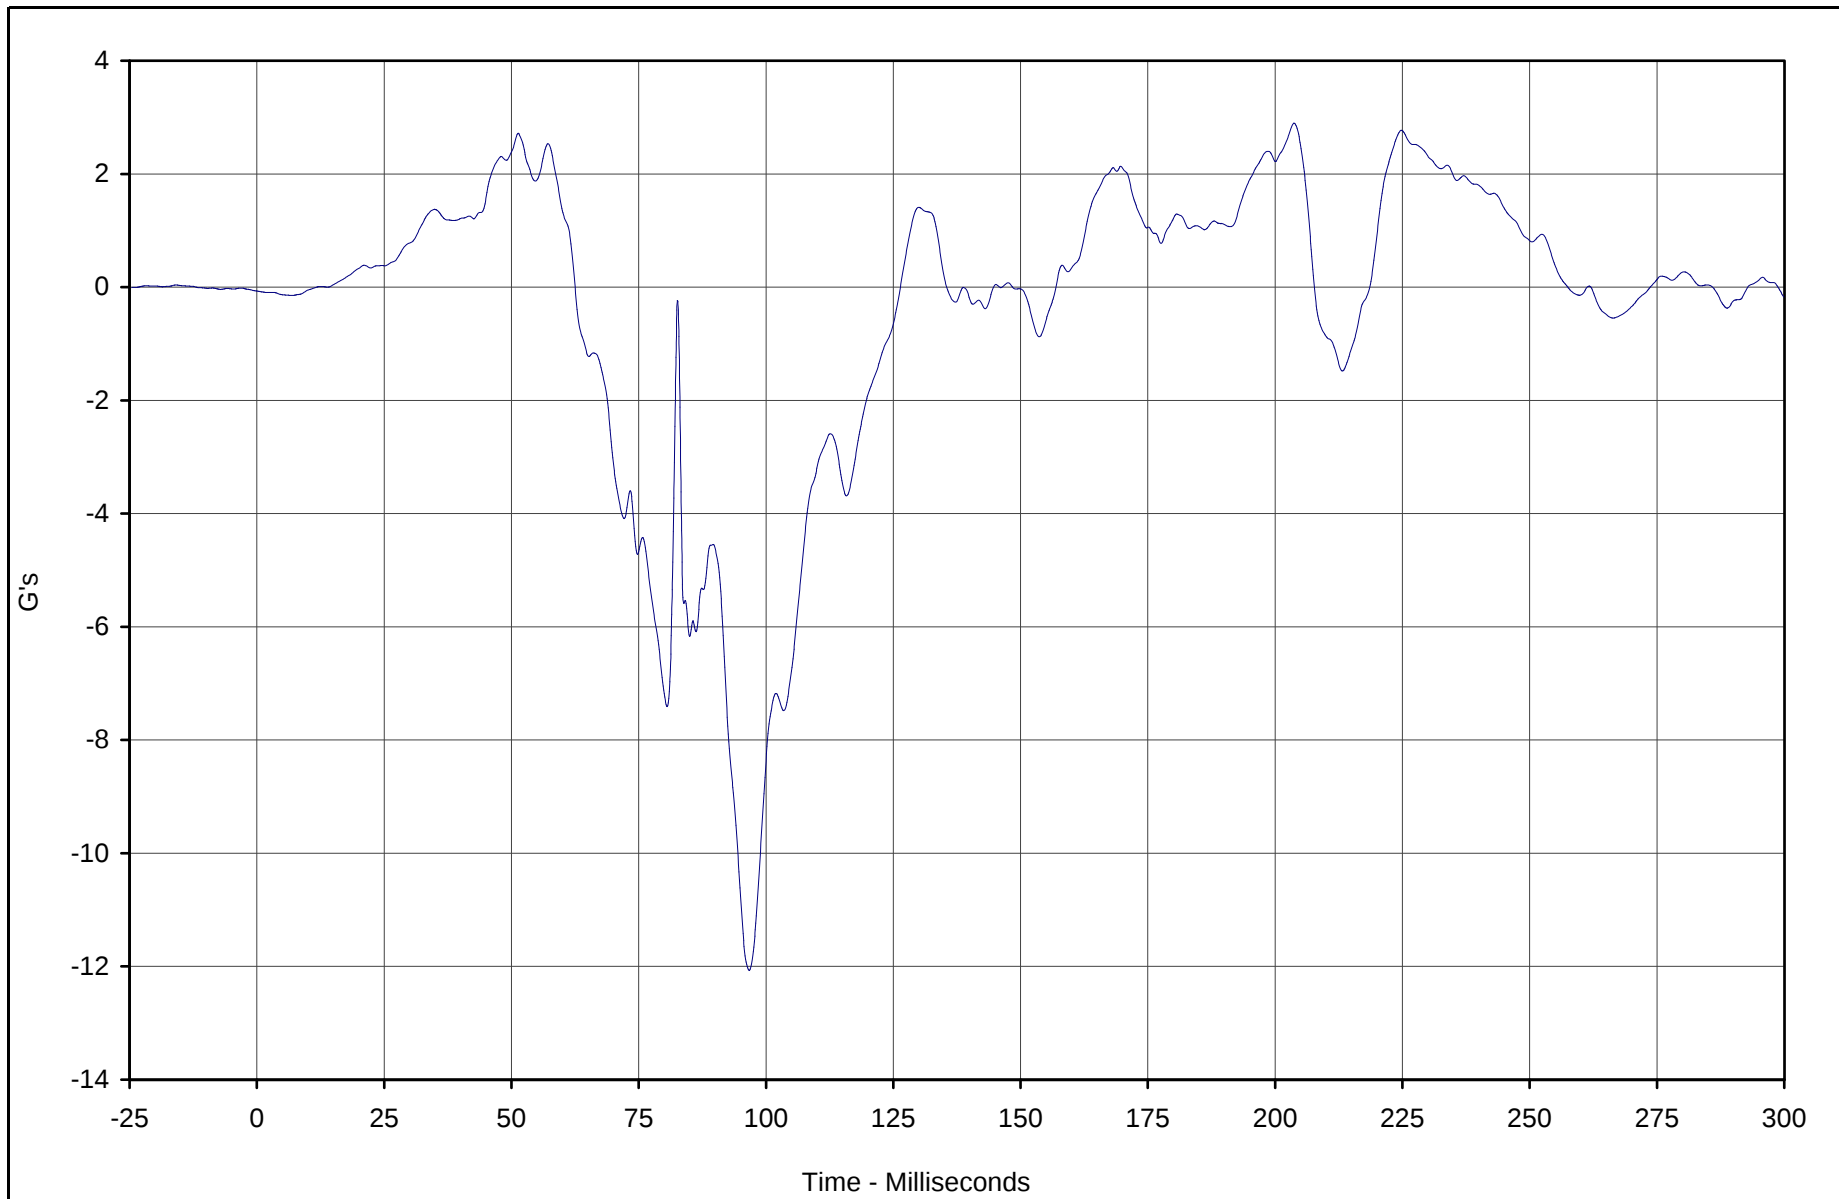

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Chest Y	176	FIL	G's	2.9	203.7	-12.1	96.7	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

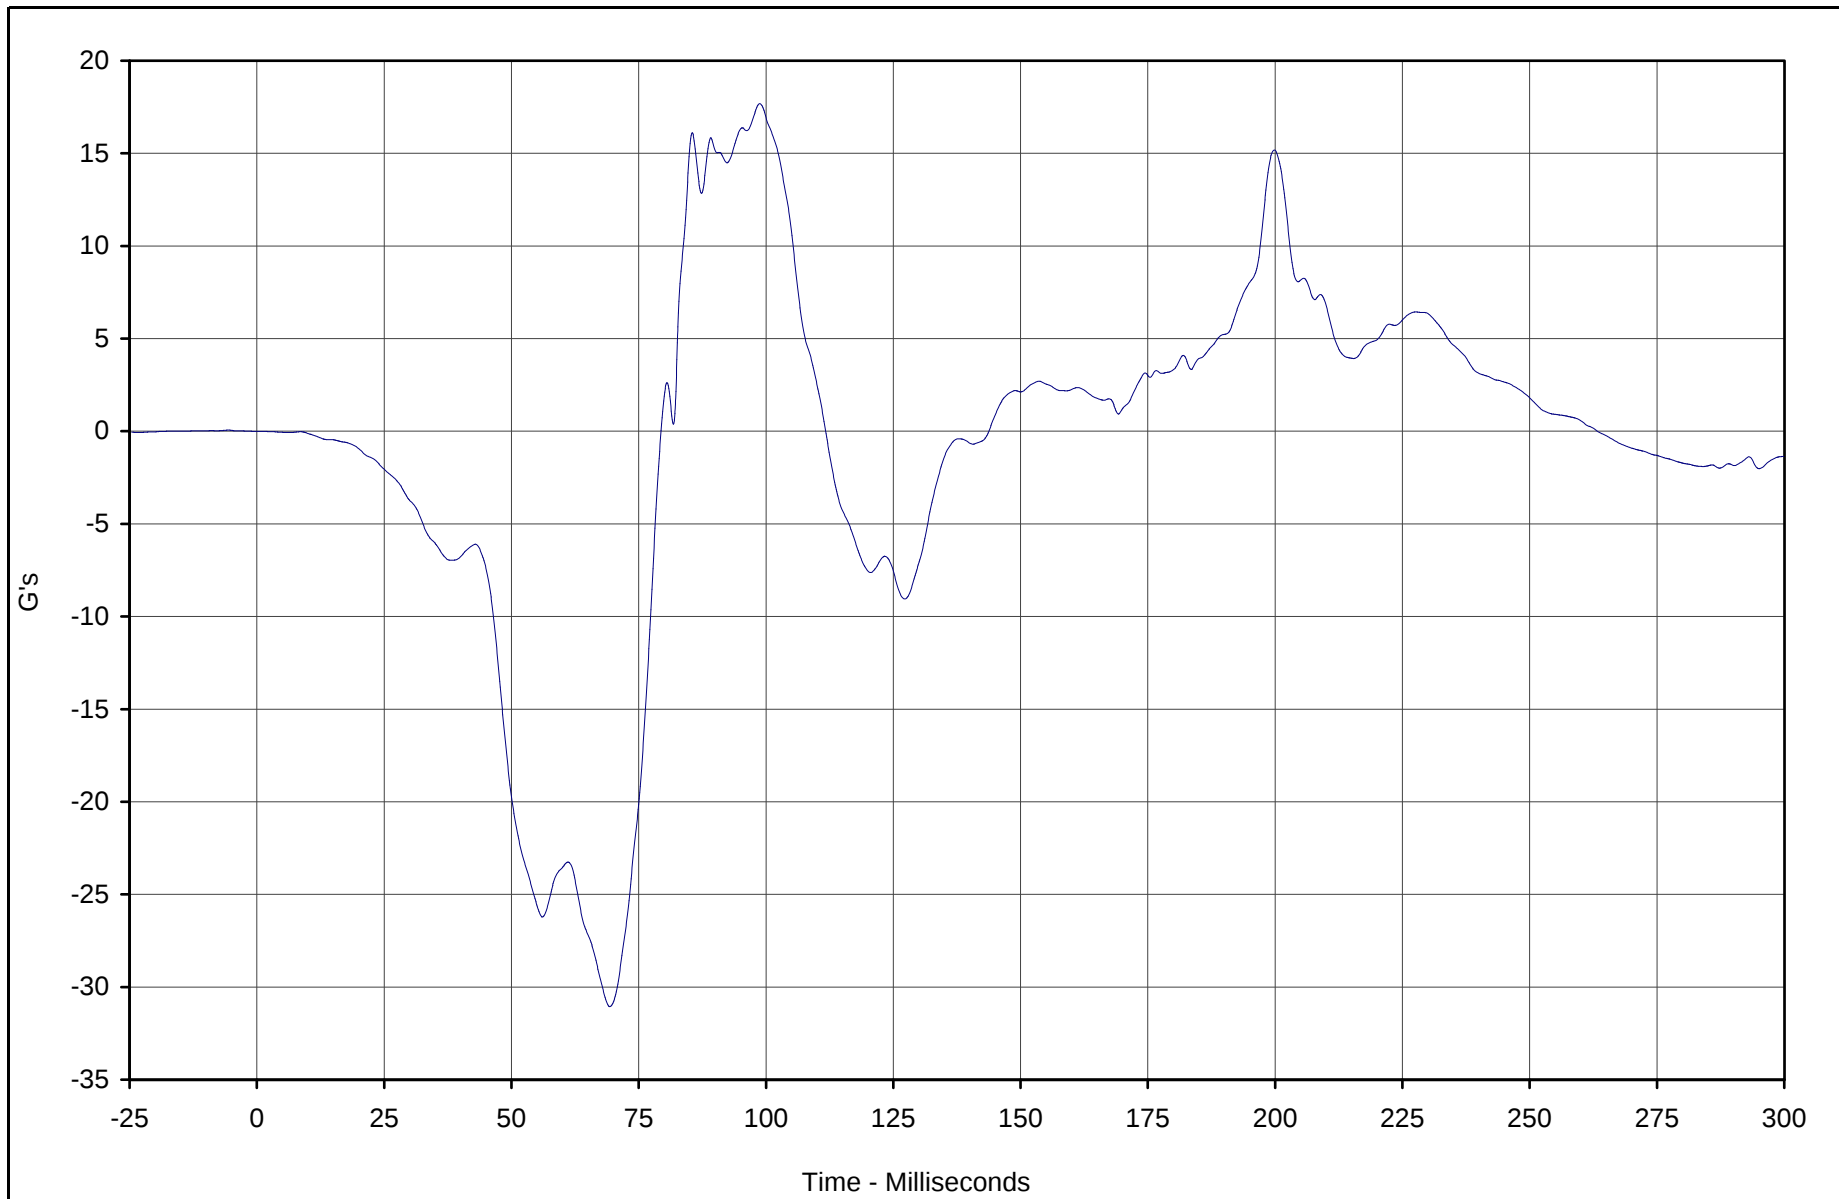

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Chest Z	177	FIL	G's	17.7	98.8	-31.1	69.3	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

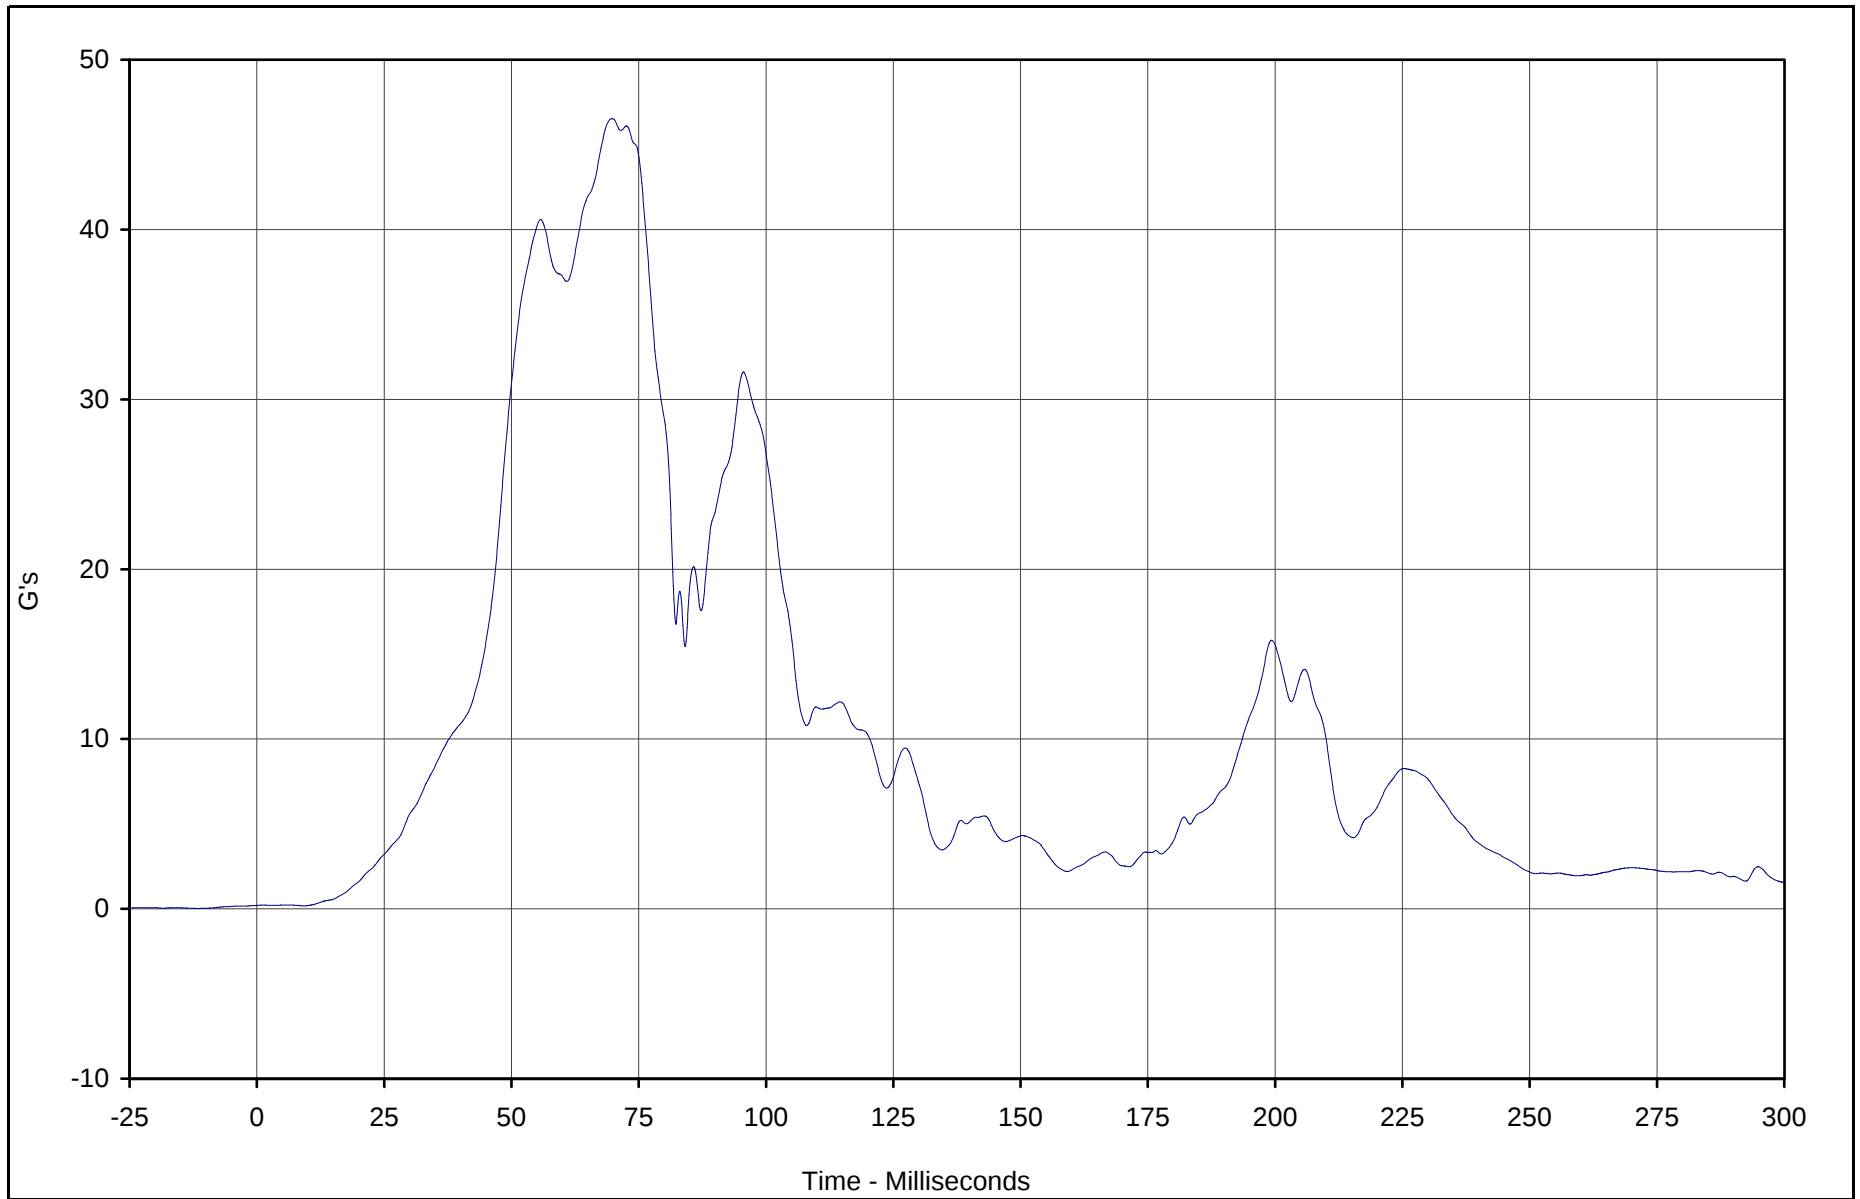

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Chest Resultant	177	RES	G's	46.5	69.8	0.2	9.3	180




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

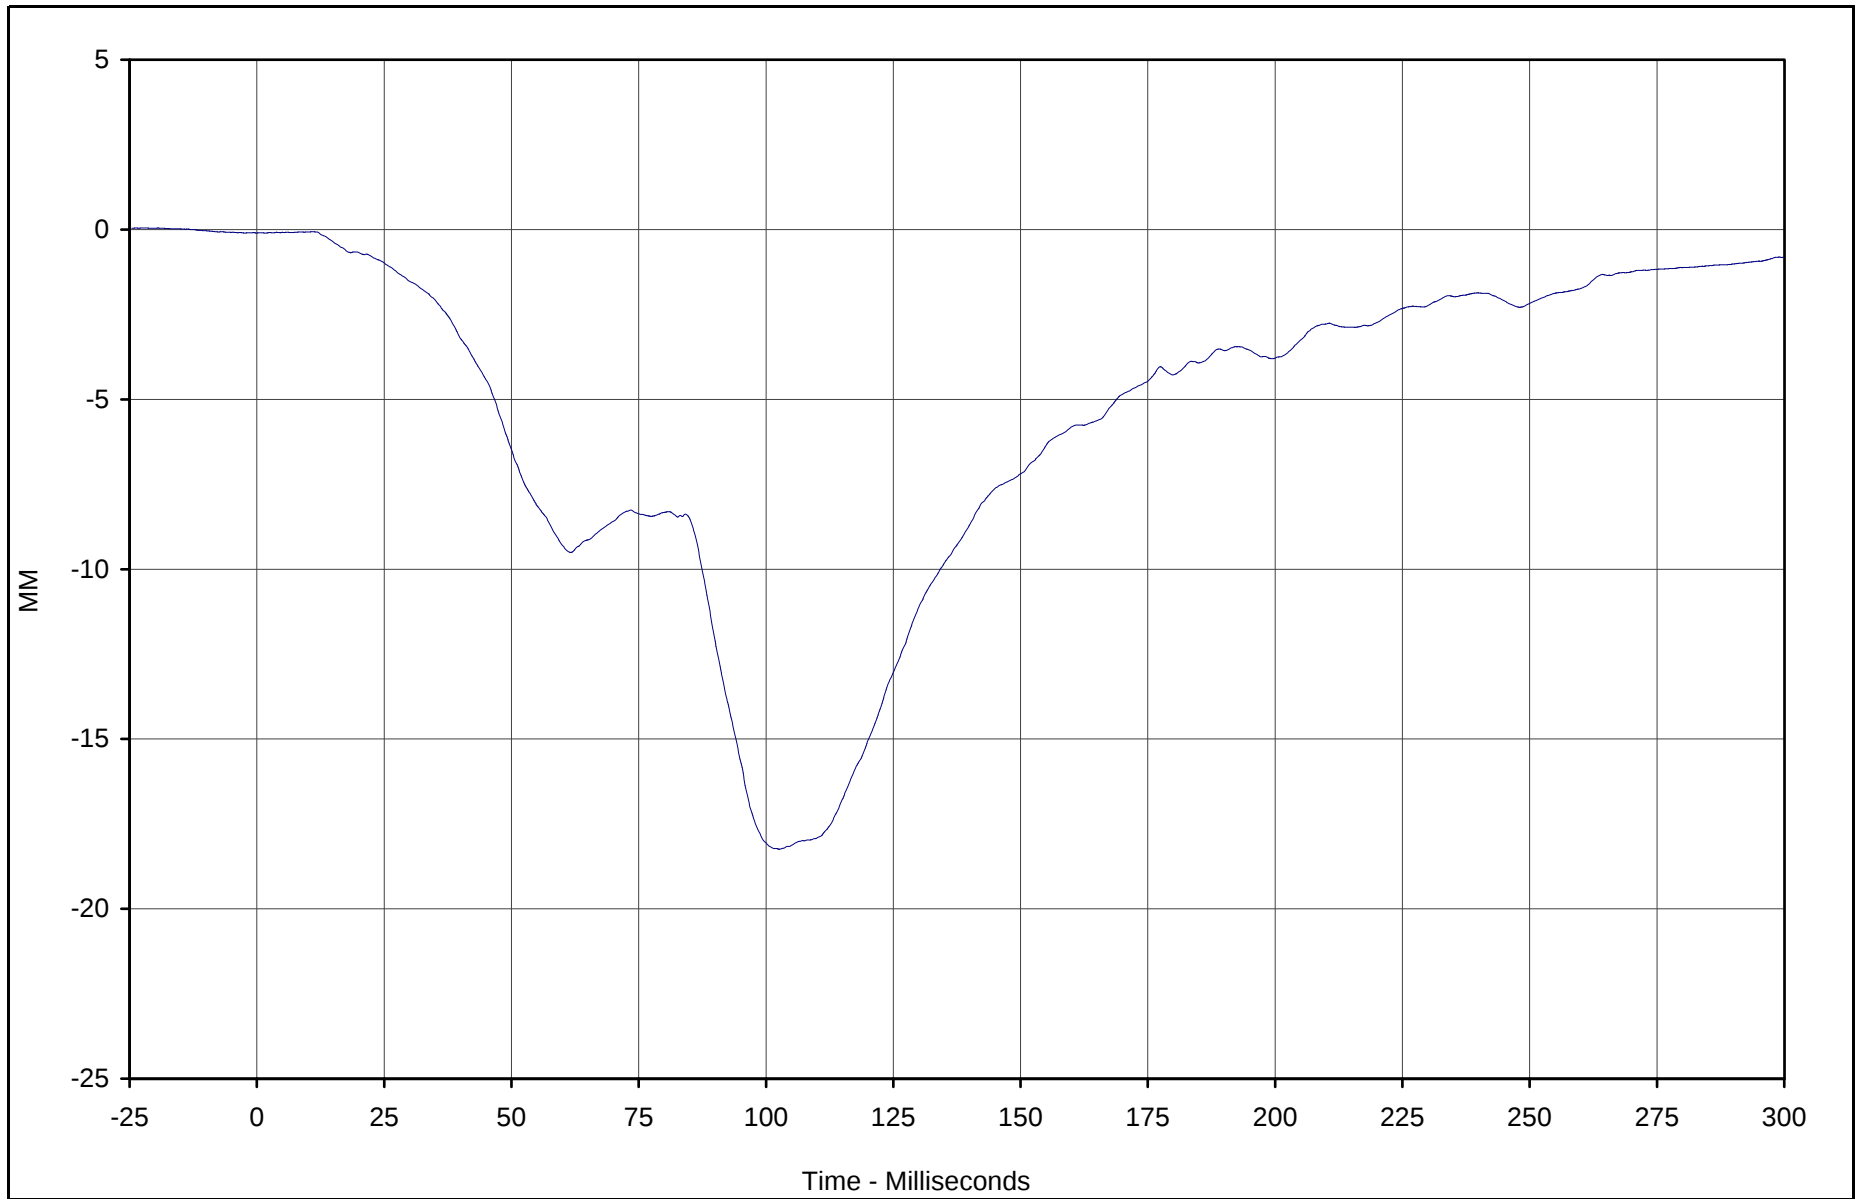

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Chest Deflection	178	FIL	MM	-0.1	11.0	-18.2	102.6	600




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

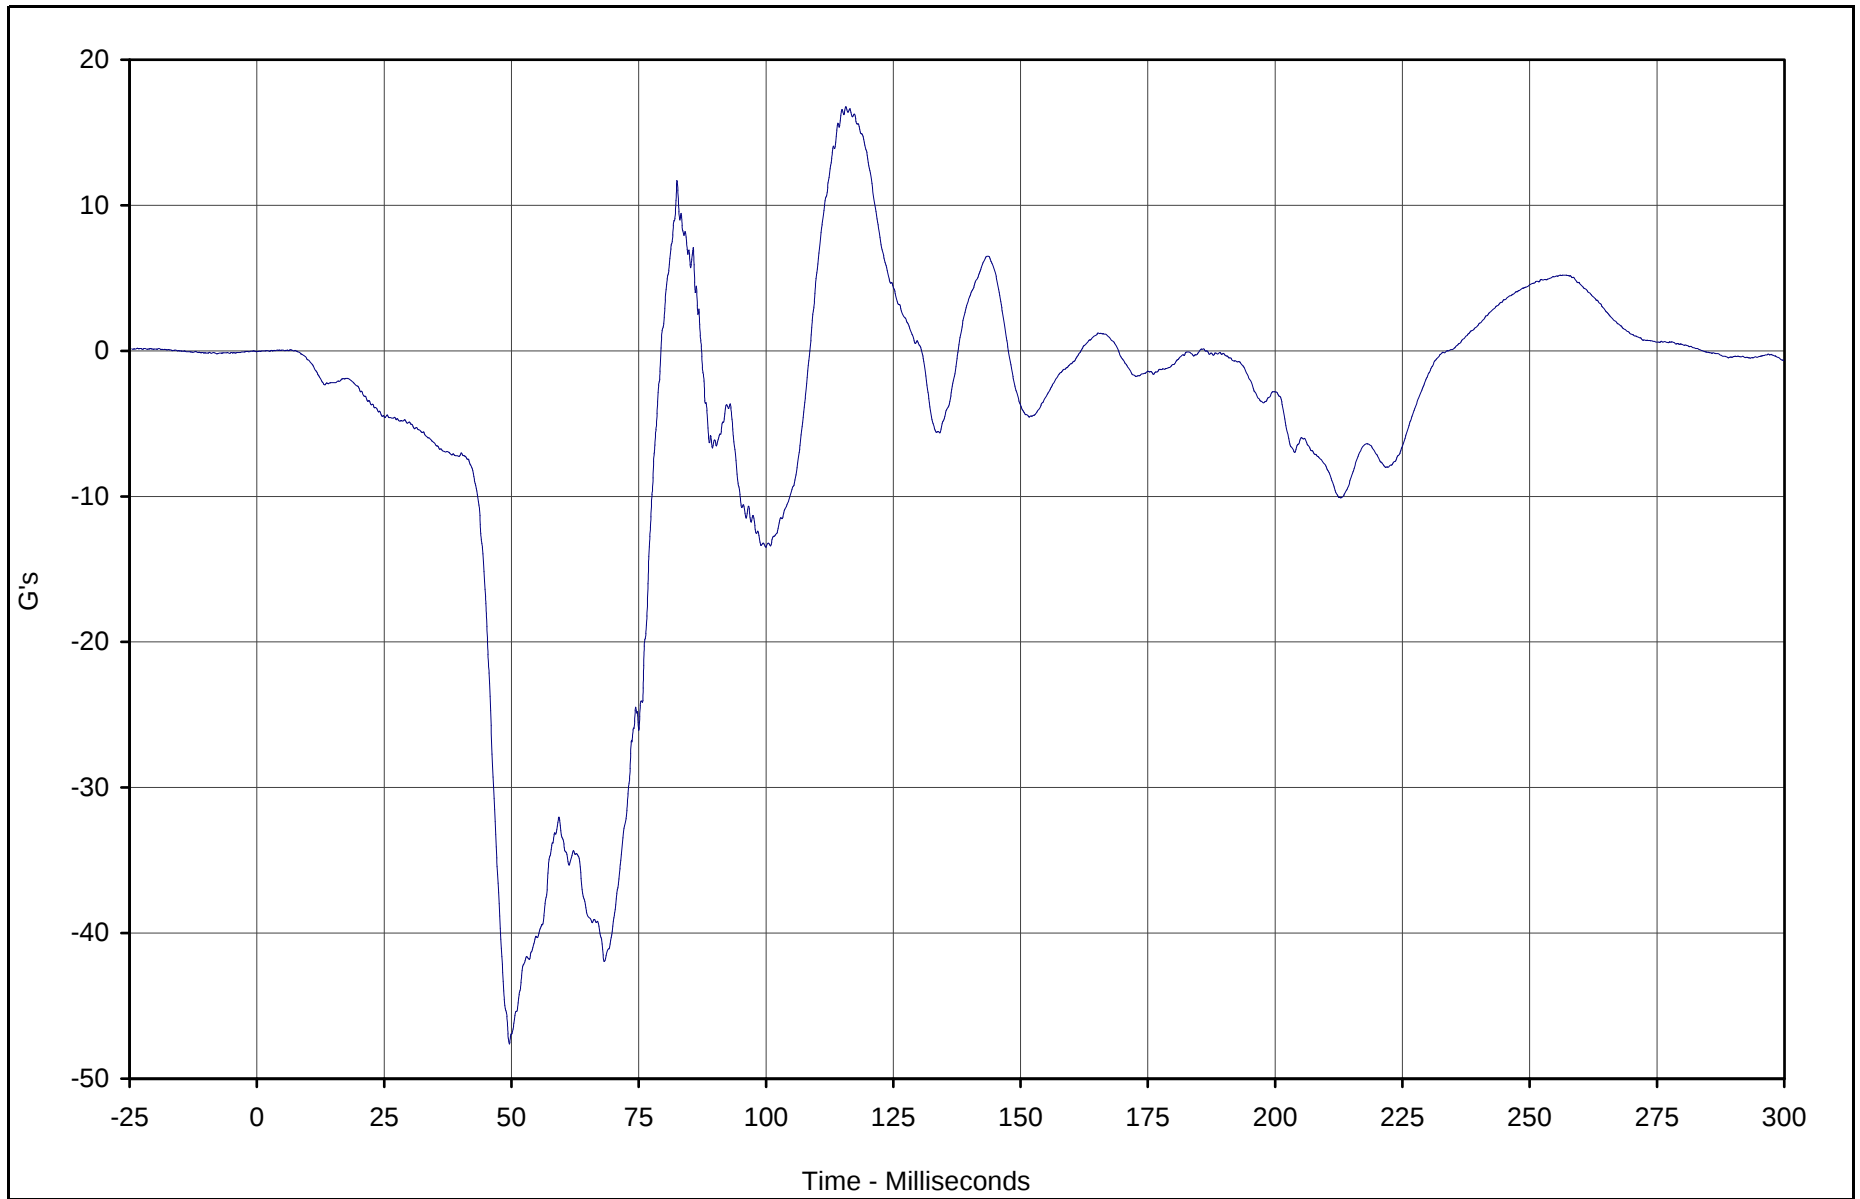

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Pelvis X	179	FIL	G's	16.8	115.7	-47.6	49.6	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

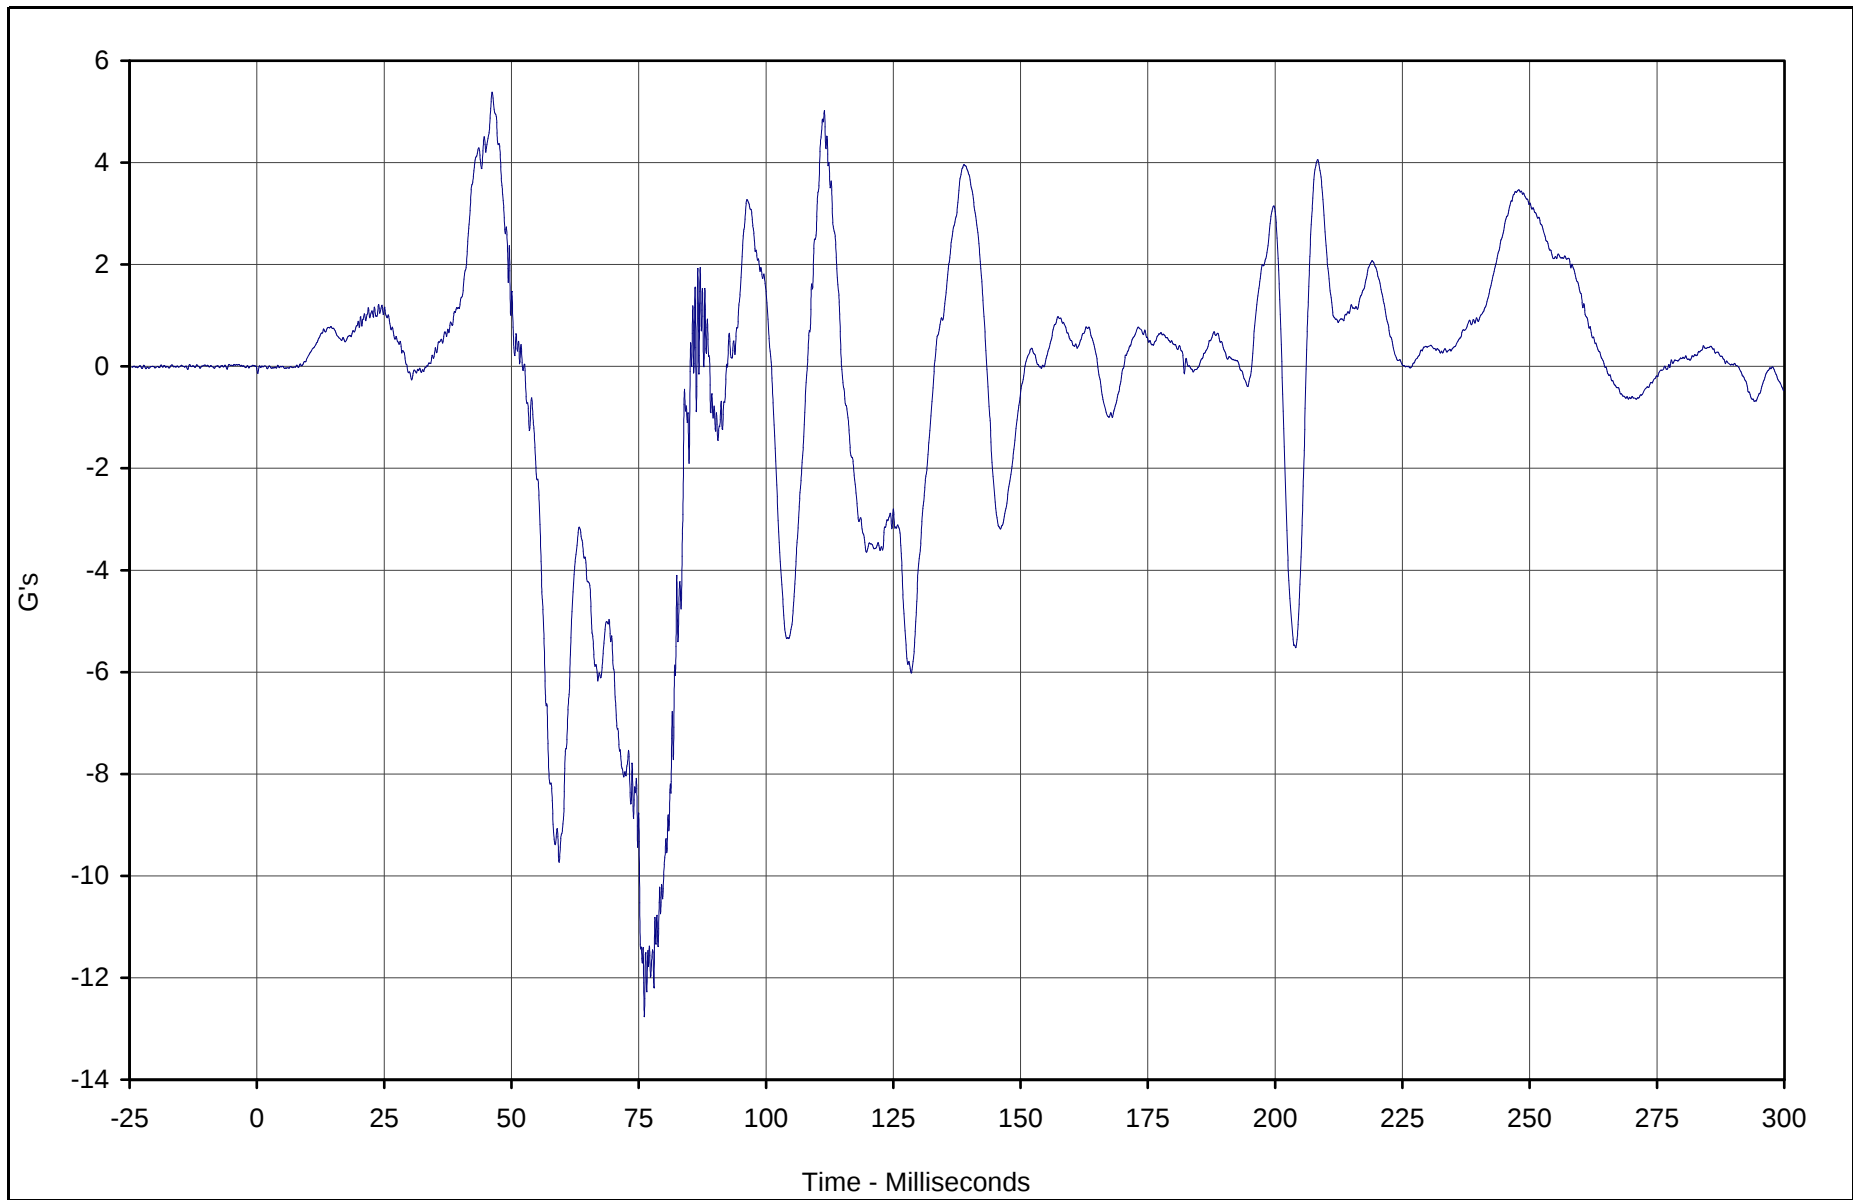

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Pelvis Y	180	FIL	G's	5.4	46.2	-12.8	76.1	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

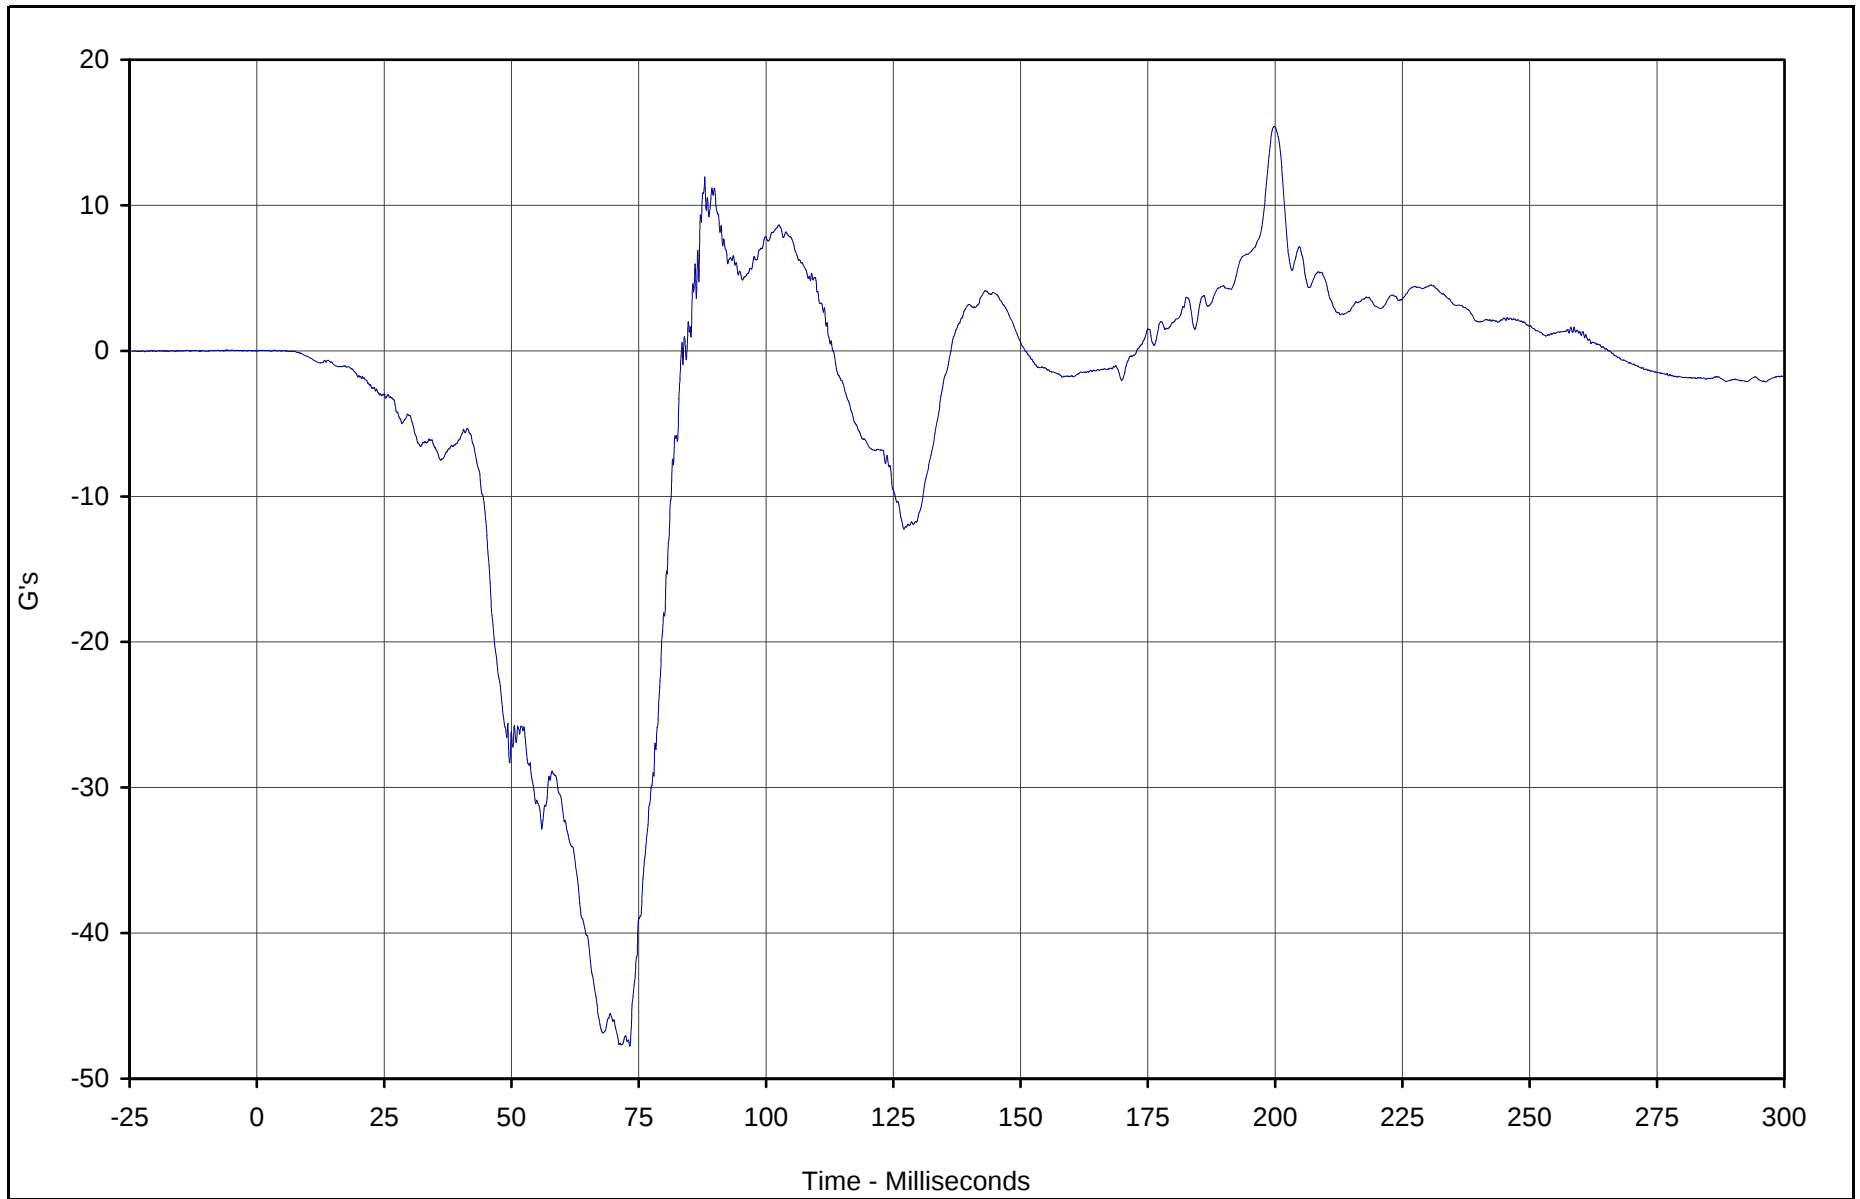

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Pelvis Z	181	FIL	G's	15.4	199.8	-47.8	73.2	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

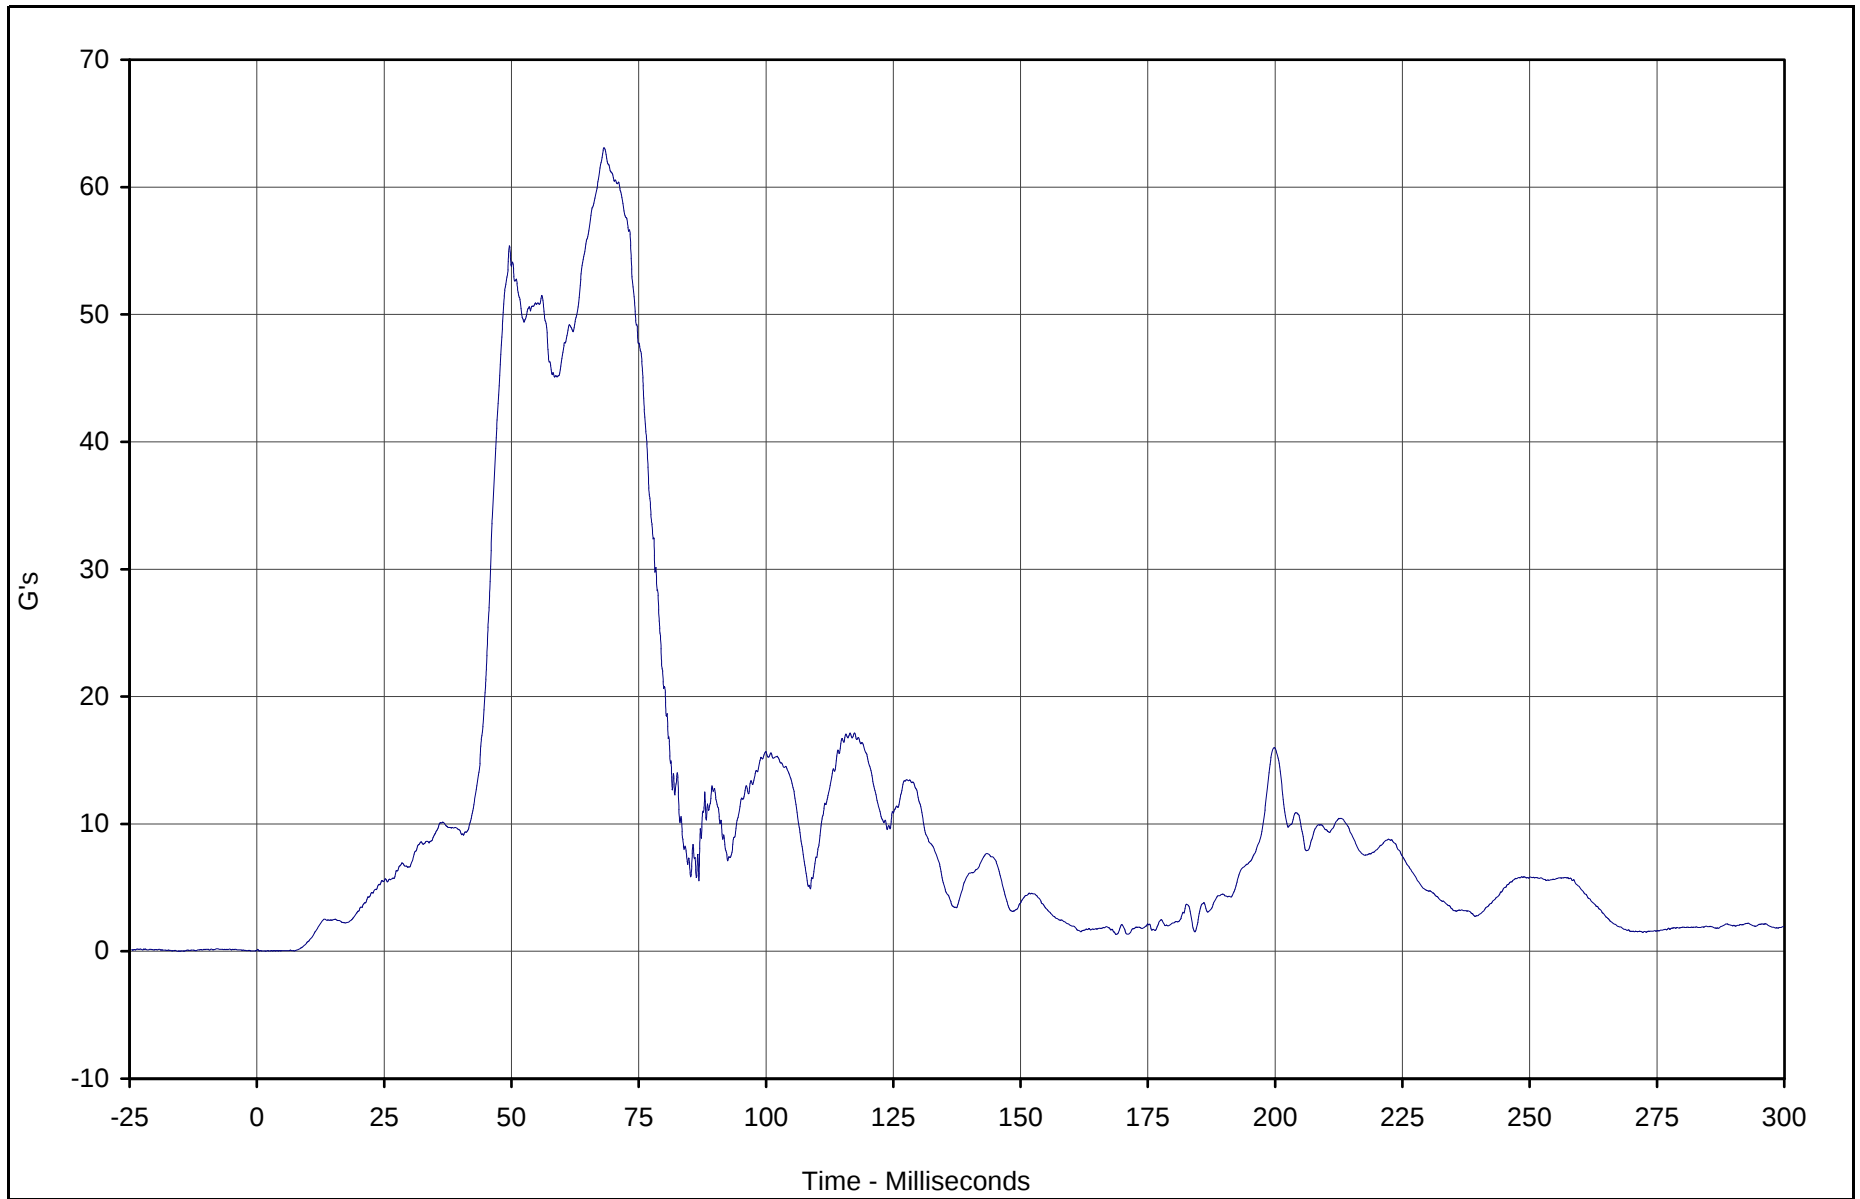

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Pelvis Resultant	179	RES	G's	63.1	68.2	0.0	1.8	1000




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

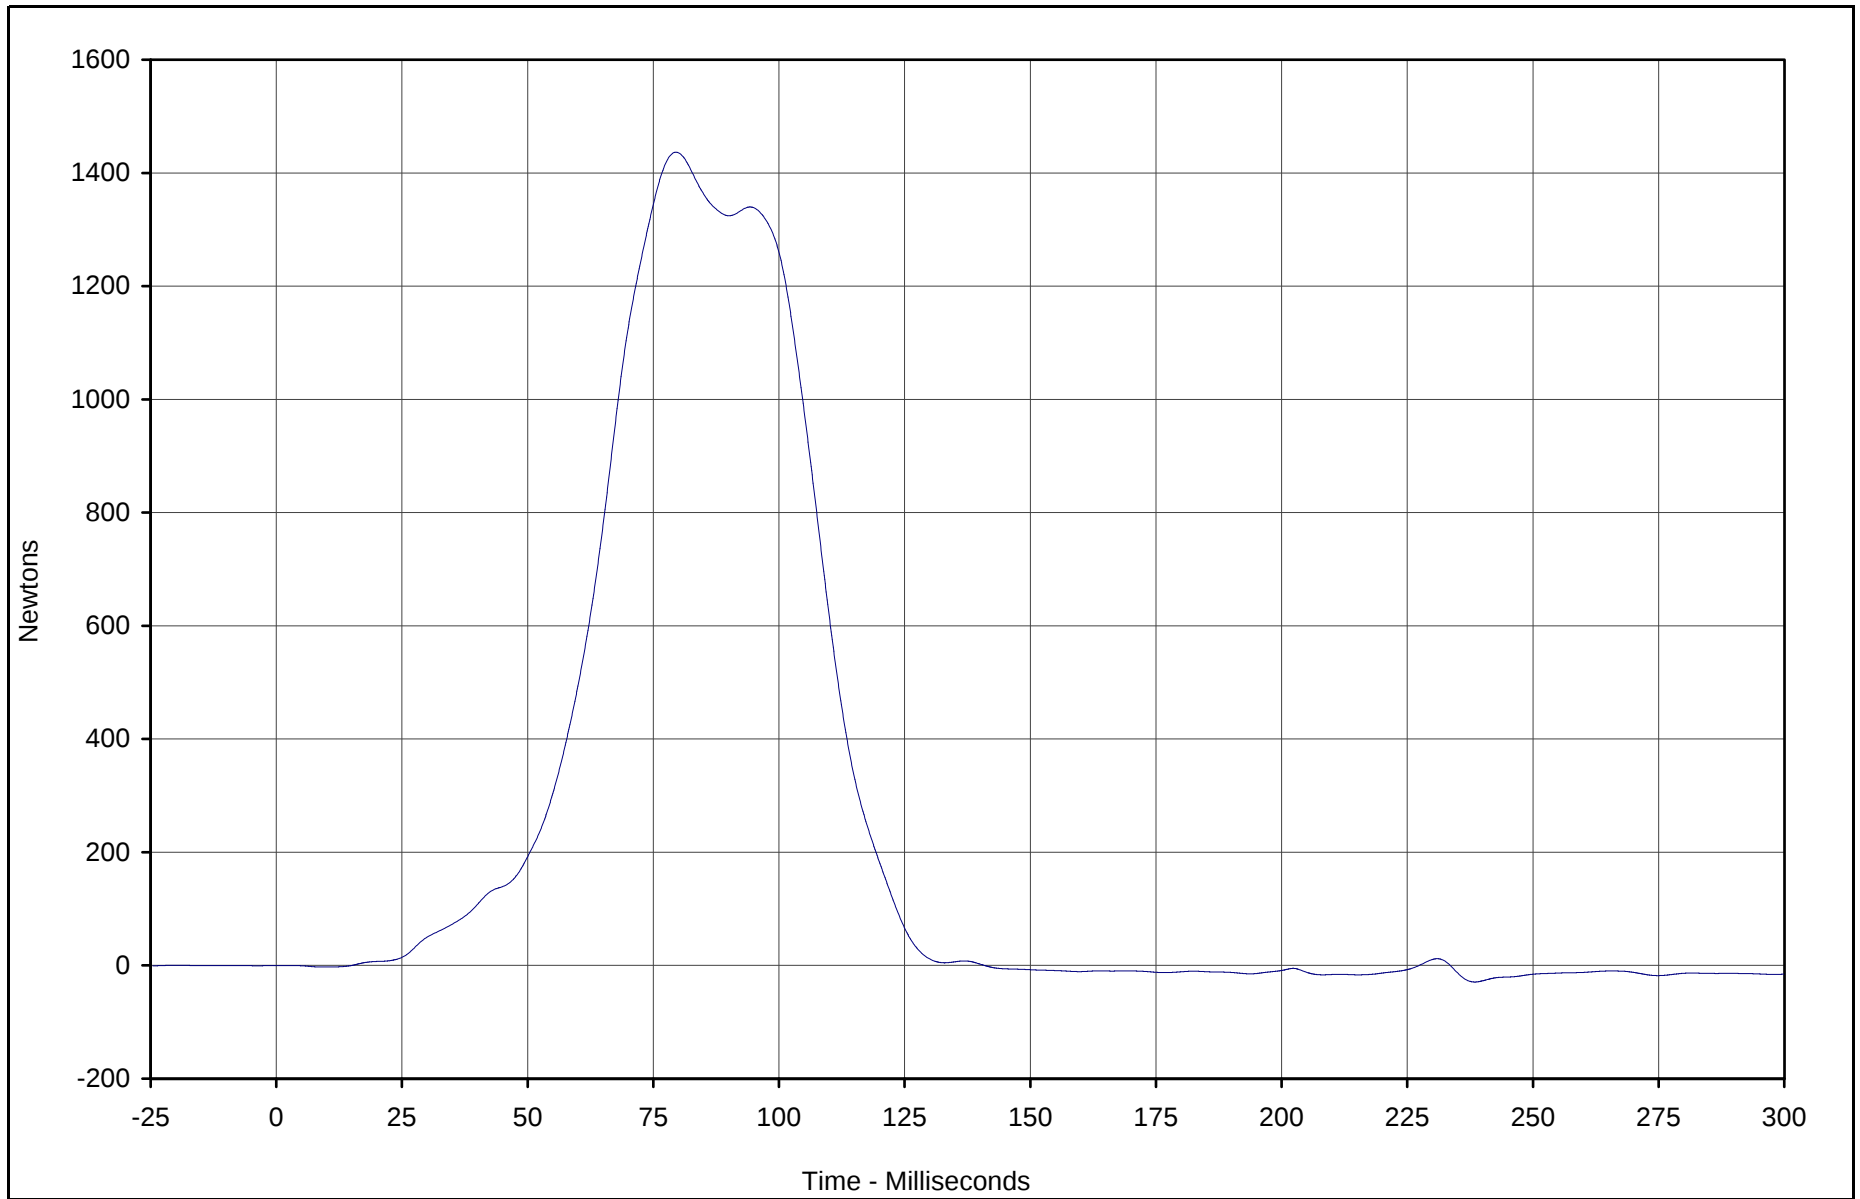

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Seat Tether Load	182	FIL	Newtons	1436.6	79.5	-29.3	238.4	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

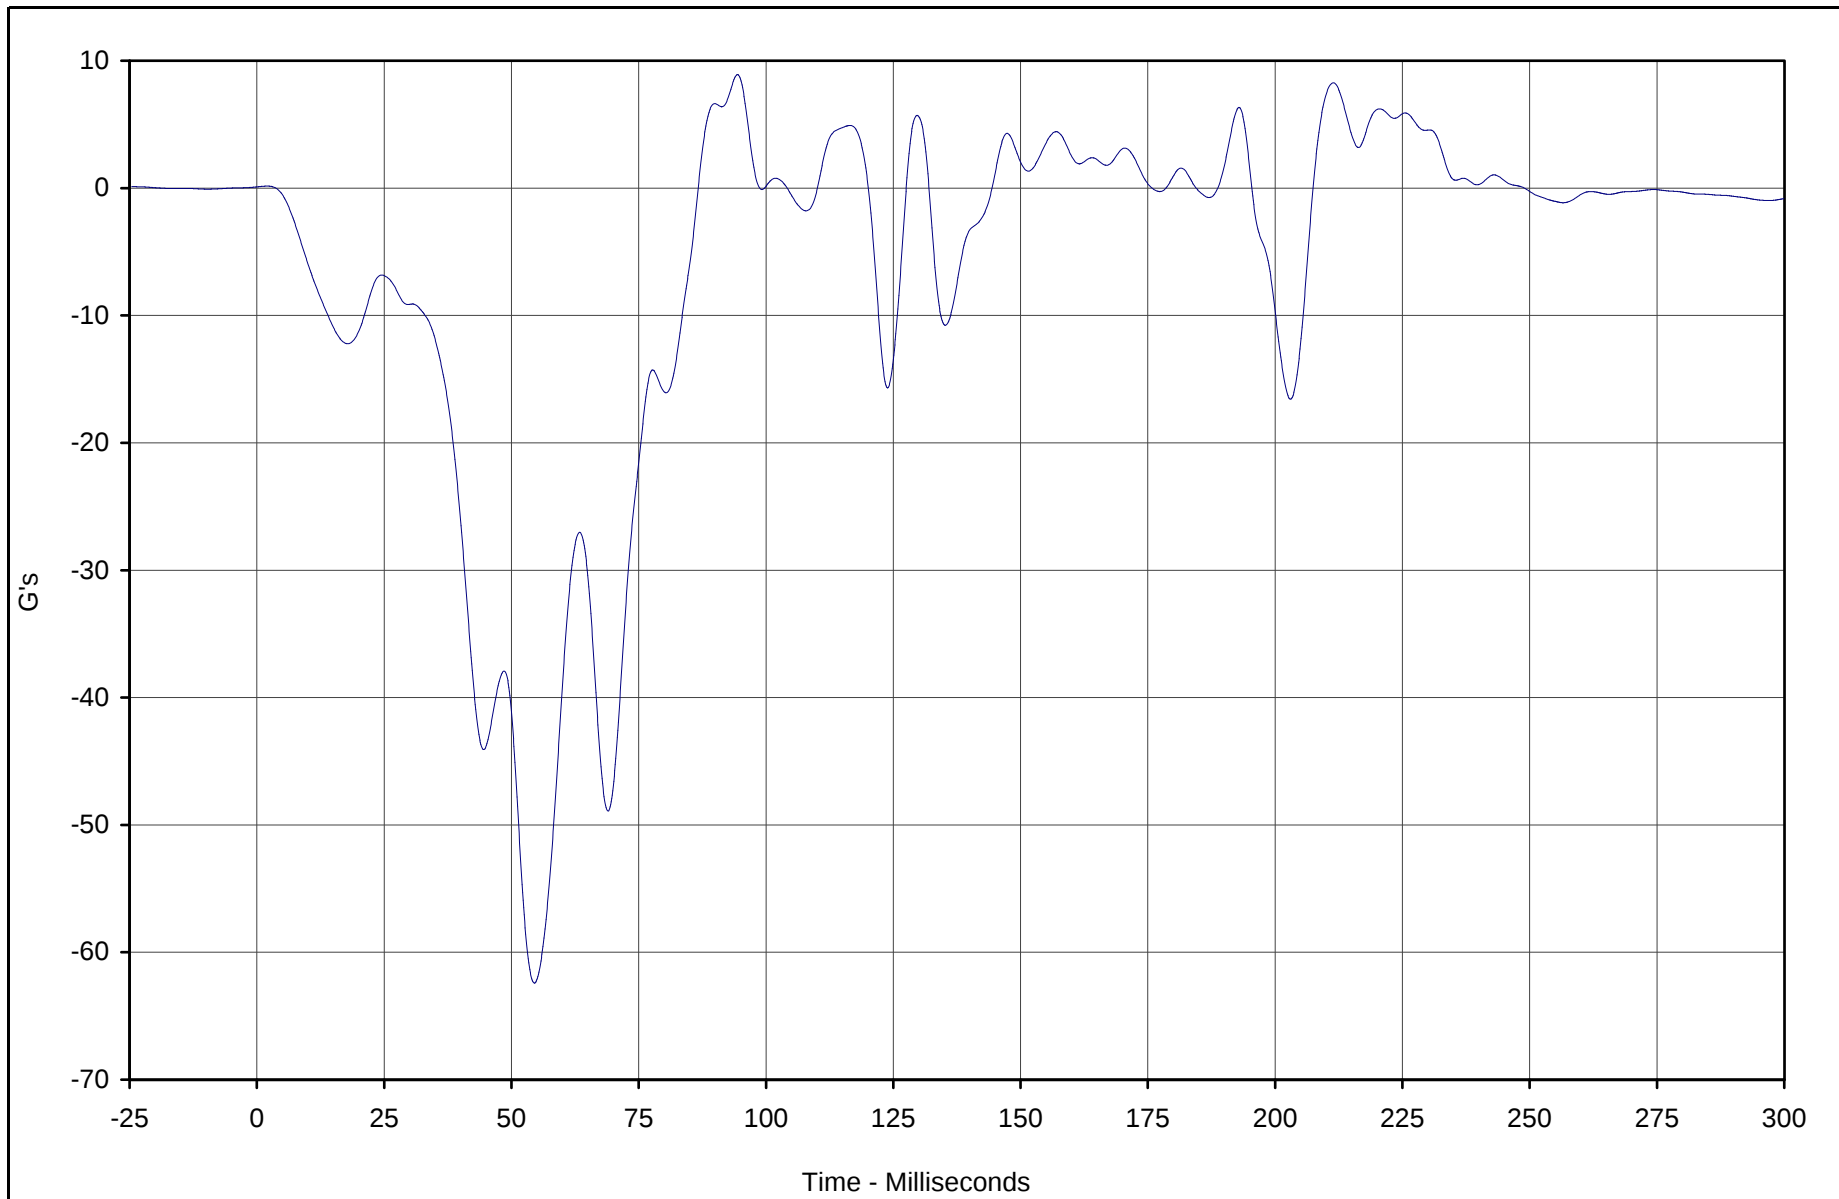

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Car Seat X	183	FIL	G's	8.9	94.4	-62.4	54.5	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

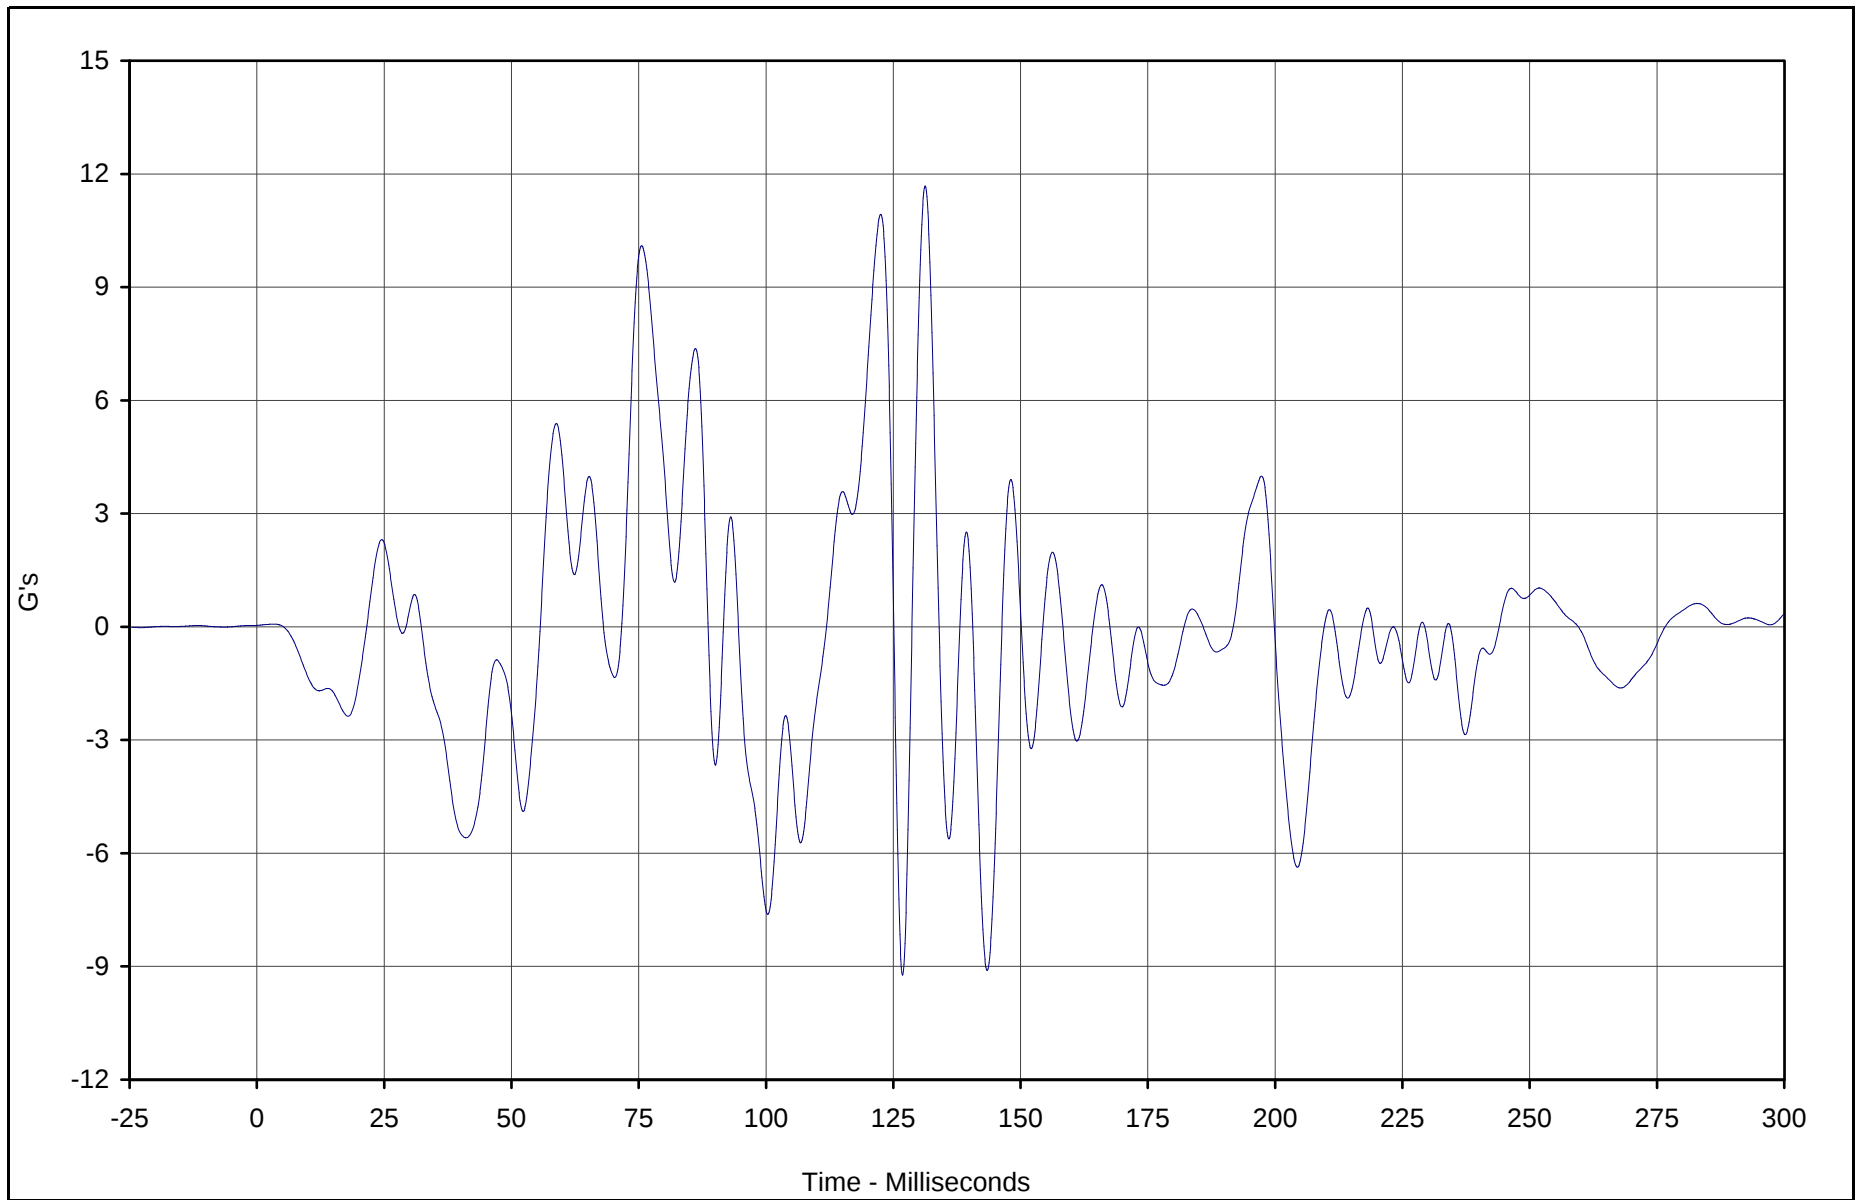

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Car Seat Y	184	FIL	G's	11.7	131.3	-9.2	126.8	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

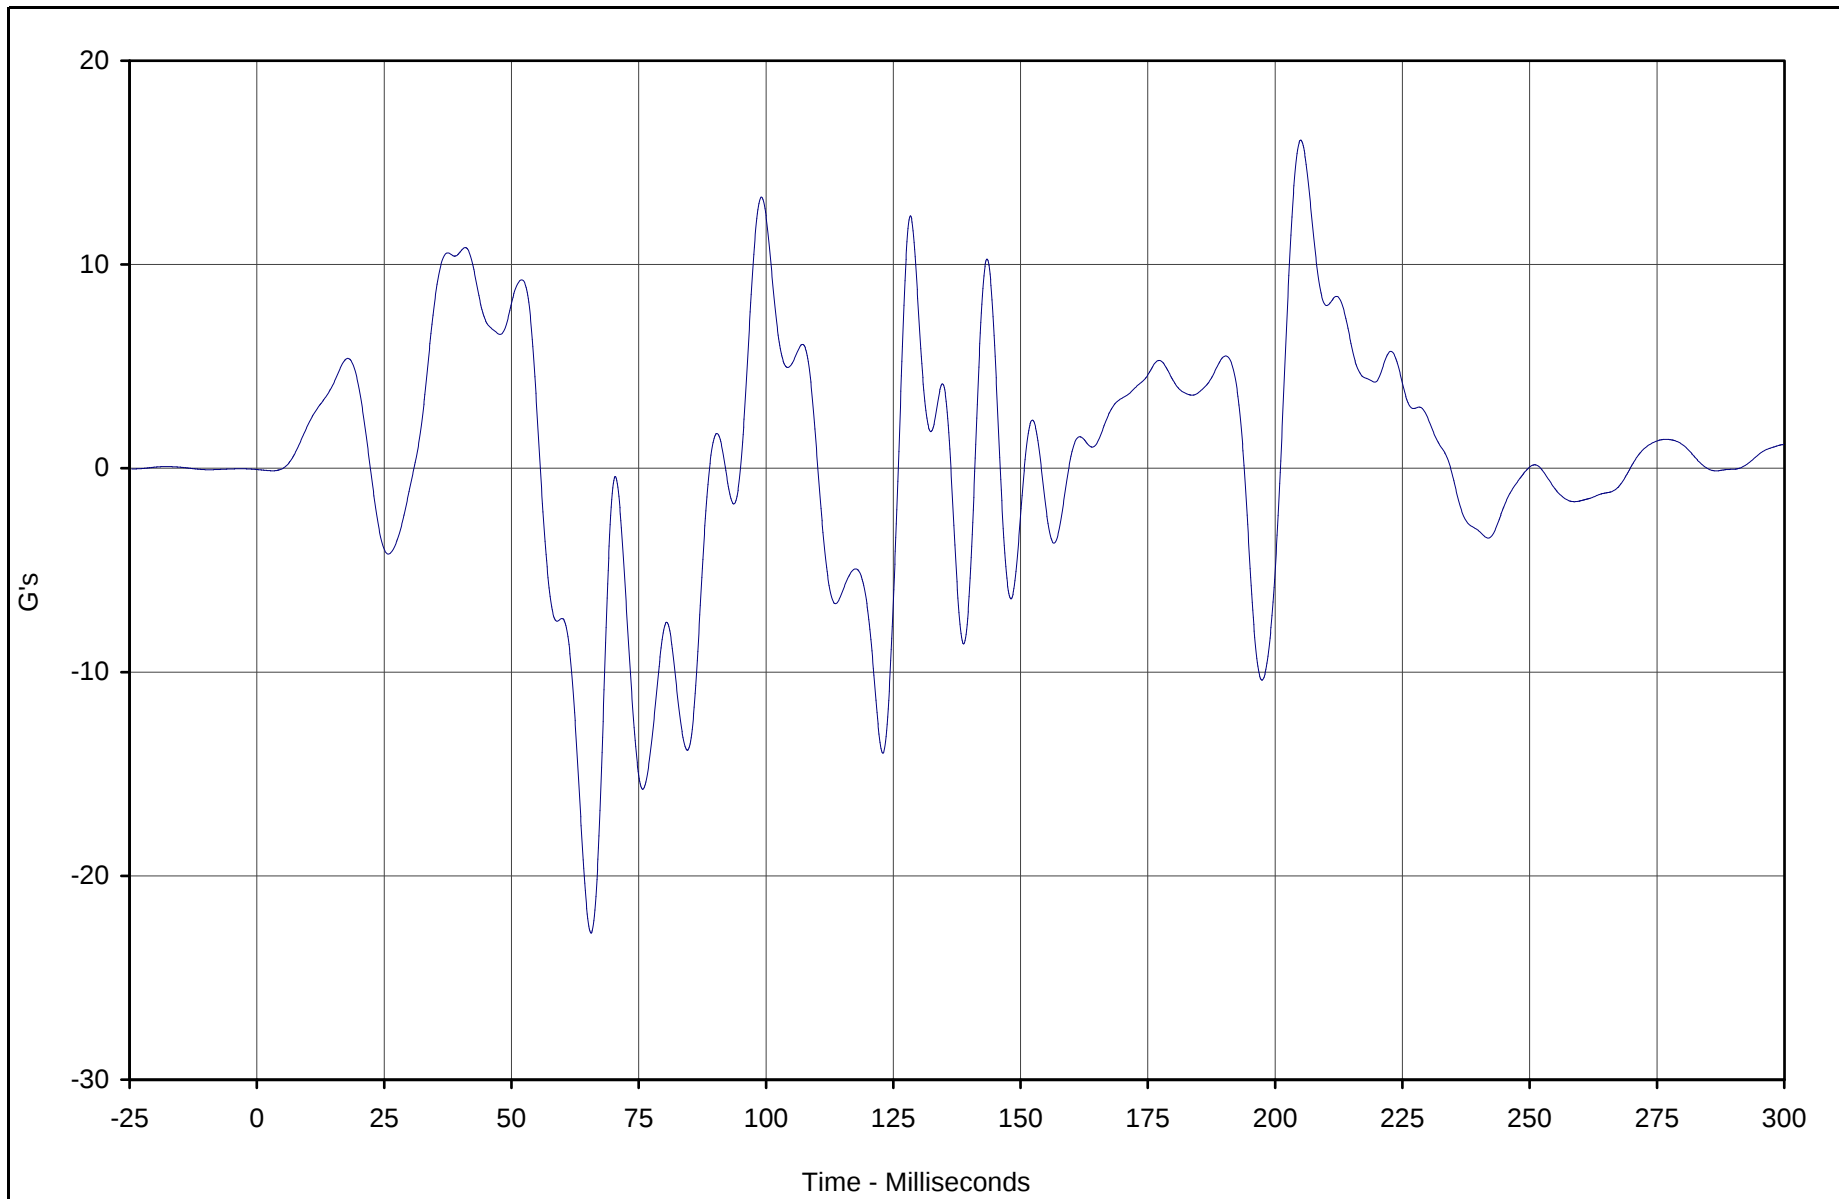

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Car Seat Z	185	FIL	G's	16.1	205.0	-22.8	65.6	60




Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

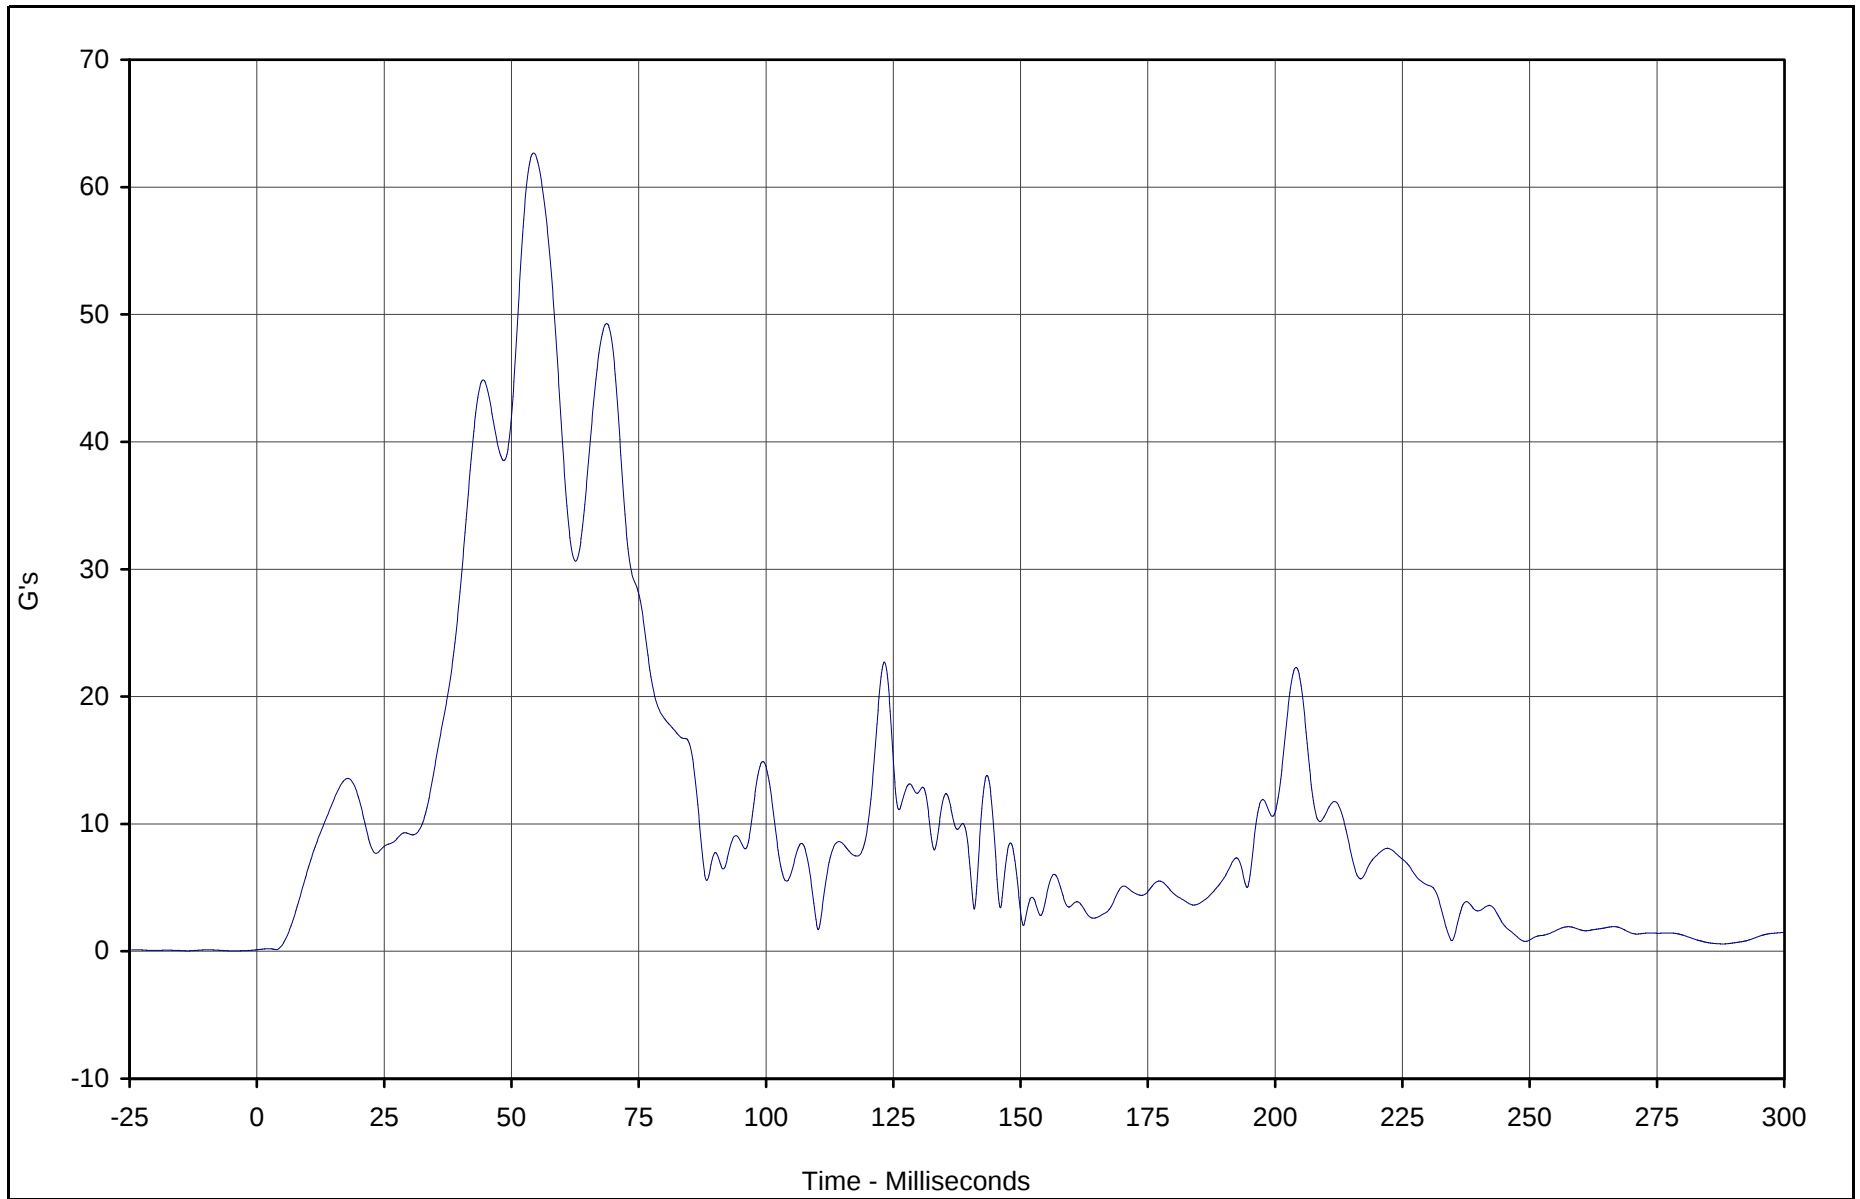

Curve Description	CURNO	Type	Units	Max	Time	Min	Time	SAE Class
Left Rear (3 Yr.) Car Seat Resultant	183	RES	G's	62.7	54.4	0.1	0.0	60



Test Vehicle: 2003 Mitsubishi Outlander 4 Door SUV

Test Date: 2/20/03

Test Program: 2003 NHTSA 35mph NCAP

NHTSA No.: M35602

SECTION F-4

CHILD DUMMY INSTRUMENTATION INFORMATION

2003 NHTSA 35mph NCAP
Instrumentation Data Channel Assignments
Right Rear Child A.T.D. Serial Number 082
2/20/03
2003 Mitsubishi Outlander 4 Door SUV

CH.	LOCATION	AXIS	IDENT. NO.	DESCRIPTION	MFR	MODEL	UNITS
134	HEAD, PRIMARY	X	GPAC050	Accel.,1/2 bridge	Endevco	7264-2000	G
135	HEAD, PRIMARY	Y	GPAC051	Accel.,1/2 bridge	Endevco	7264-2000	G
136	HEAD, PRIMARY	Z	GPAC052	Accel.,1/2 bridge	Endevco	7264-2000	G
137	UPPER NECK FORCE	X	082UNFX	Load cell, six axis neck	R. A. Denton	IF-234	N
138	UPPER NECK FORCE	Y	082UNFY	Load cell, six axis neck	R. A. Denton	IF-234	N
139	UPPER NECK FORCE	Z	082UNFZ	Load cell, six axis neck	R. A. Denton	IF-234	N
140	UPPER NECK MOMENT	X	082UNMX	Load cell, six axis neck	R. A. Denton	IF-234	Nm
141	UPPER NECK MOMENT	Y	082UNMY	Load cell, six axis neck	R. A. Denton	IF-234	Nm
142	UPPER NECK MOMENT	Z	082UNMZ	Load cell, six axis neck	R. A. Denton	IF-234	Nm
143	LOWER NECK FORCE	X	082LNFX	Load cell, six axis neck	R. A. Denton	3303	N
144	LOWER NECK FORCE	Y	082LNFY	Load cell, six axis neck	R. A. Denton	3303	N
145	LOWER NECK FORCE	Z	082LNFZ	Load cell, six axis neck	R. A. Denton	3303	N
146	LOWER NECK MOMENT	X	082LNMX	Load cell, six axis neck	R. A. Denton	3303	Nm
147	LOWER NECK MOMENT	Y	082LNMY	Load cell, six axis neck	R. A. Denton	3303	Nm
148	LOWER NECK MOMENT	Z	082LNMZ	Load cell, six axis neck	R. A. Denton	3303	Nm
149	CHEST , PRIMARY	X	2116-A11	Accel., Full Bridge	Entran	2000JF	G
150	CHEST , PRIMARY	Y	2116-A14	Accel., Full Bridge	Entran	2000JF	G
151	CHEST , PRIMARY	Z	2116-A23	Accel., Full Bridge	Entran	2000JF	G
152	CHEST DISPLACEMENT	X	082CP	Rotary Pot Chest	Servo	14CBI	MM
153	PELVIS, PRIMARY	X	2116-A12	Accel., Full Bridge	Entran	2000JF	G
154	PELVIS, PRIMARY	Y	2116-A19	Accel., Full Bridge	Entran	2000JF	G
155	PELVIS, PRIMARY	Z	2116-A17	Accel., Full Bridge	Entran	2000JF	G
156	CAR SEAT TETHER	X	BL112	Load cell, Seat belt	FGP	FN4060	N
157	CAR SEAT	X	KETX1A	Accel.,1/2 bridge	Endevco	7264-200	G
158	CAR SEAT	Y	KETX1B	Accel.,1/2 bridge	Endevco	7264-200	G
159	CAR SEAT	Z	KETX1C	Accel.,1/2 bridge	Endevco	7264-200	G

2003 NHTSA 35mph NCAP
Instrumentation Data Channel Assignments
Left Rear Child A.T.D. Serial Number 139
2/20/03
2003 Mitsubishi Outlander 4 Door SUV

CH.	LOCATION	AXIS	IDENT. NO.	DESCRIPTION	MFR	MODEL	UNITS
160	HEAD, PRIMARY	X	GPAC047	Accel.,1/2 bridge	Endevco	7264-2000	G
161	HEAD, PRIMARY	Y	GPAC048	Accel.,1/2 bridge	Endevco	7264-2000	G
162	HEAD, PRIMARY	Z	GPAC049	Accel.,1/2 bridge	Endevco	7264-2000	G
163	UPPER NECK FORCE	X	139UNFX	Load cell, six axis neck	R. A. Denton	IF-234	N
164	UPPER NECK FORCE	Y	139UNFY	Load cell, six axis neck	R. A. Denton	IF-234	N
165	UPPER NECK FORCE	Z	139UNFZ	Load cell, six axis neck	R. A. Denton	IF-234	N
166	UPPER NECK MOMENT	X	139UNMX	Load cell, six axis neck	R. A. Denton	IF-234	Nm
167	UPPER NECK MOMENT	Y	139UNMY	Load cell, six axis neck	R. A. Denton	IF-234	Nm
168	UPPER NECK MOMENT	Z	139UNMZ	Load cell, six axis neck	R. A. Denton	IF-234	Nm
169	LOWER NECK FORCE	X	139LNFX	Load cell, six axis neck	R. A. Denton	3303	N
170	LOWER NECK FORCE	Y	139LNFY	Load cell, six axis neck	R. A. Denton	3303	N
171	LOWER NECK FORCE	Z	139LNFZ	Load cell, six axis neck	R. A. Denton	3303	N
172	LOWER NECK MOMENT	X	139LNMX	Load cell, six axis neck	R. A. Denton	3303	Nm
173	LOWER NECK MOMENT	Y	139LNMY	Load cell, six axis neck	R. A. Denton	3303	Nm
174	LOWER NECK MOMENT	Z	139LNMZ	Load cell, six axis neck	R. A. Denton	3303	Nm
175	CHEST , PRIMARY	X	2116-A01	Accel., Full Bridge	Entran	2000JF	G
176	CHEST , PRIMARY	Y	2116-A06	Accel., Full Bridge	Entran	2000JF	G
177	CHEST , PRIMARY	Z	2116-A07	Accel., Full Bridge	Entran	2000JF	G
178	CHEST DISPLACEMENT	X	139CP	Rotary Pot Chest	Servo	14CBI	MM
179	PELVIS, PRIMARY	X	2116-N07	Accel., Full Bridge	Entran	2000JF	G
180	PELVIS, PRIMARY	Y	2116-A03	Accel., Full Bridge	Entran	2000JF	G
181	PELVIS, PRIMARY	Z	2116-A17	Accel., Full Bridge	Entran	2000JF	G
182	CAR SEAT TETHER	X	BL113	Load cell, Seat belt	FGP	FN4060	N
183	CAR SEAT	X	KETX4A	Accel.,1/2 bridge	Endevco	7264-200	G
184	CAR SEAT	Y	KETX4B	Accel.,1/2 bridge	Endevco	7264-200	G
185	CAR SEAT	Z	KETX4C	Accel.,1/2 bridge	Endevco	7264-200	G

SECTION F-5

CHILD DUMMY CALIBRATION INFORMATION



Calibration Data Sheet Hybrid III 3 Year Old Head Drop Test

ATD Serial No.: 082

Test I.D.: HD02A

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	18.9 to 25.6	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Peak Resultant Acceleration	G's	250.0 to 280.0	272.0	Pass
Peak Lateral Acceleration	G's	≤15.0	5.3	Pass
Is Acceleration Unimodal?	Yes/No	Yes	Yes	Pass
Oscillations After Main Pulse	%	<10	3.0	Pass
Overall Test Results				Pass


F5-1

TR-P23001-11-NC


Laboratory Technician

February 14, 2003

Test Date

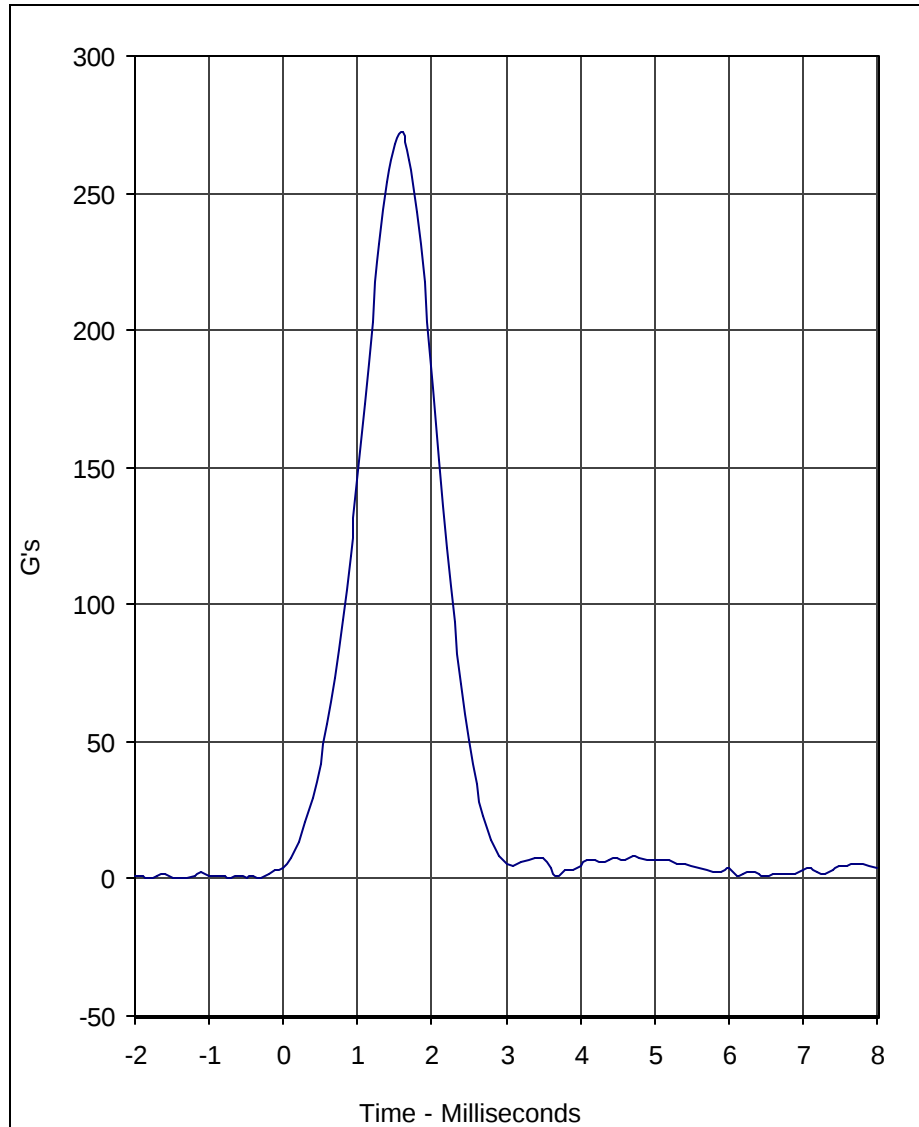

Curve Description				CURNO	Type
Head Resultant				001	RES
Units	Max	Time	Min	Time	SAE Class
G's	272.0	1.6	0.2	-1.3	1000

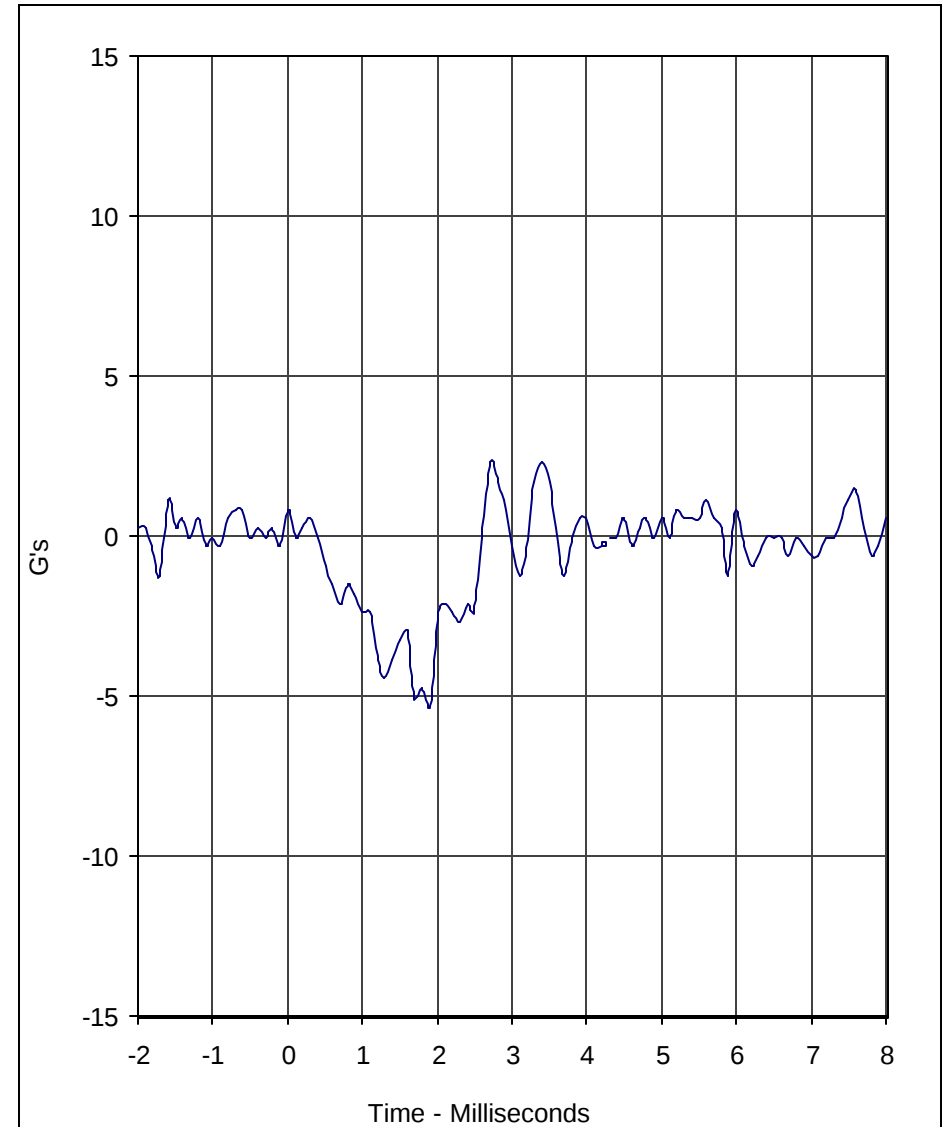

Curve Description				CURNO	Type
Head Y				002	FIL
Units	Max	Time	Min	Time	SAE Class
G's	2.3	2.7	-5.3	1.9	1000

Test Program: Hybrid III 3 Year Old Head Drop Test
 Test Date: 2/14/03

A.T.D. Serial No.: 082
 Test I.D.: HD02A





Calibration Data Sheet

Hybrid III 3 Year Old

Thorax Impact Test

ATD Serial No.: 082

Test I.D.: CH02A

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	5.9 to 6.1	5.93	Pass
Peak Chest Compression	MM	32 to 38	36.7	Pass
Peak Probe Force Between 32 and 38 MM	Newtons	680 to 810	805.8	Pass
Peak Probe Force Between 12.5 and 32 MM	Newtons	≤860	777.7	Pass
Internal Hysteresis	%	65 to 85	69.8	Pass
Overall Test Results				Pass


F5-3

TR-P23001-11-NC

Laboratory Technician

February 14, 2003


Test Date

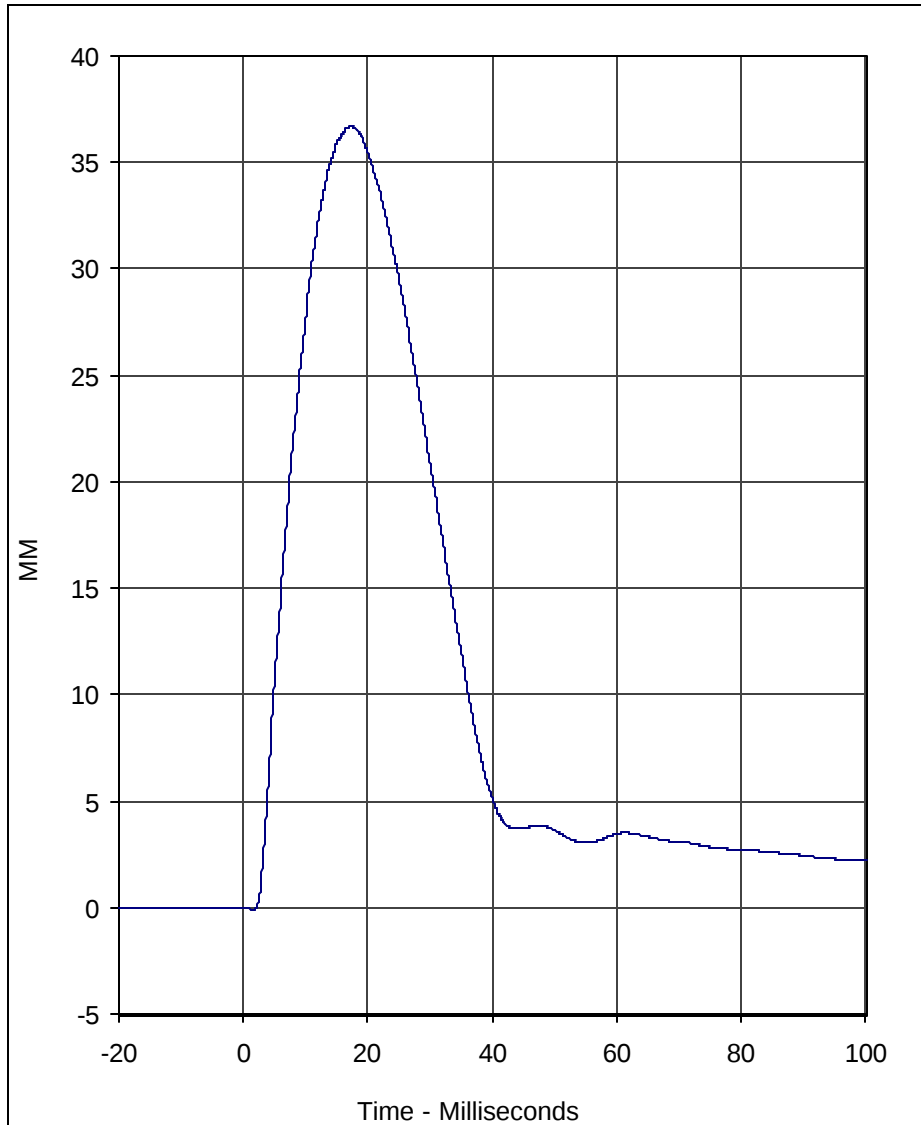

Curve Description				CURNO	Type
Chest Compression				001	FIL

Units	Max	Time	Min	Time	SAE Class
MM	36.7	17.4	-0.1	1.7	180

Test Program: Hybrid III 3 Year Old Thorax Impact
 Test Date: 2/14/03

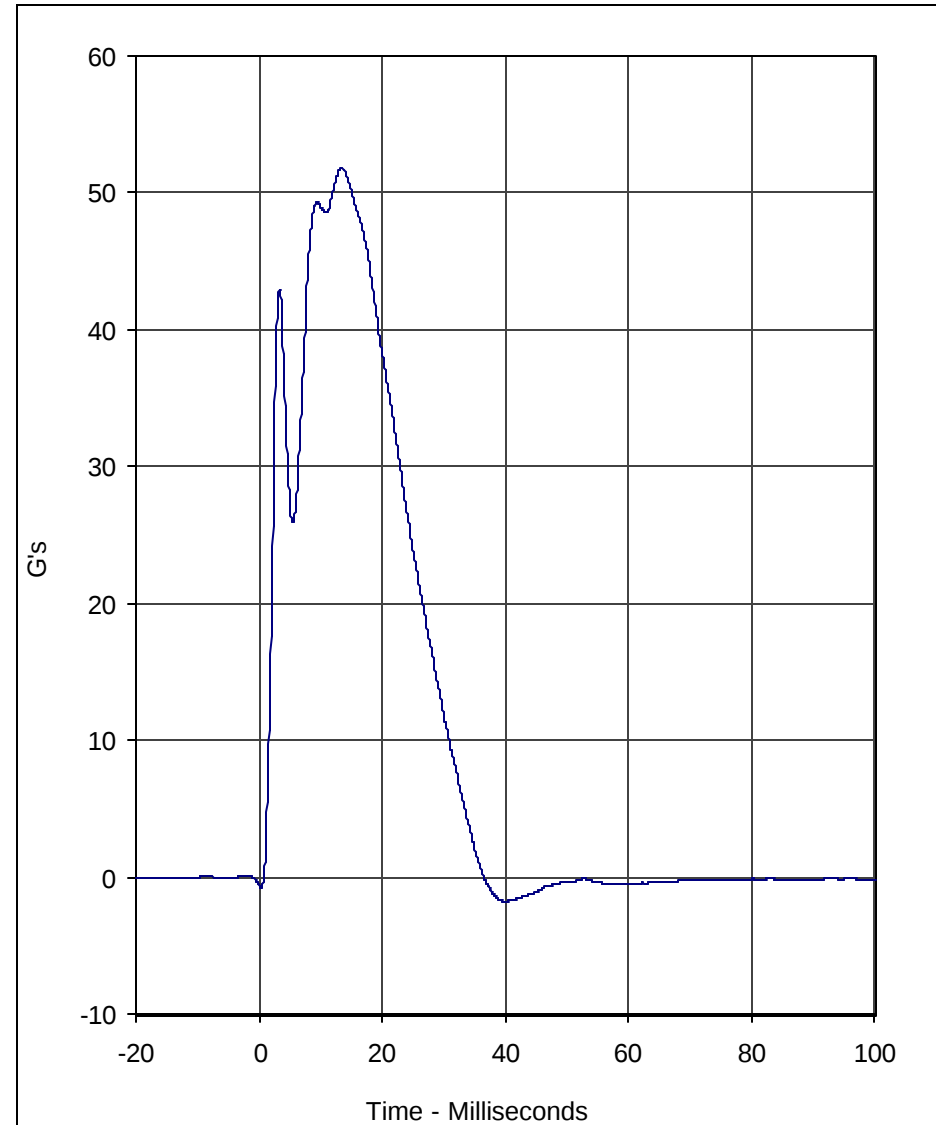


Curve Description				CURNO	Type
Probe Acceleration				002	FIL

Units	Max	Time	Min	Time	SAE Class
G's	51.8	13.5	-1.8	40.0	180

A.T.D. Serial No.: 082
 Test I.D.: CH02A




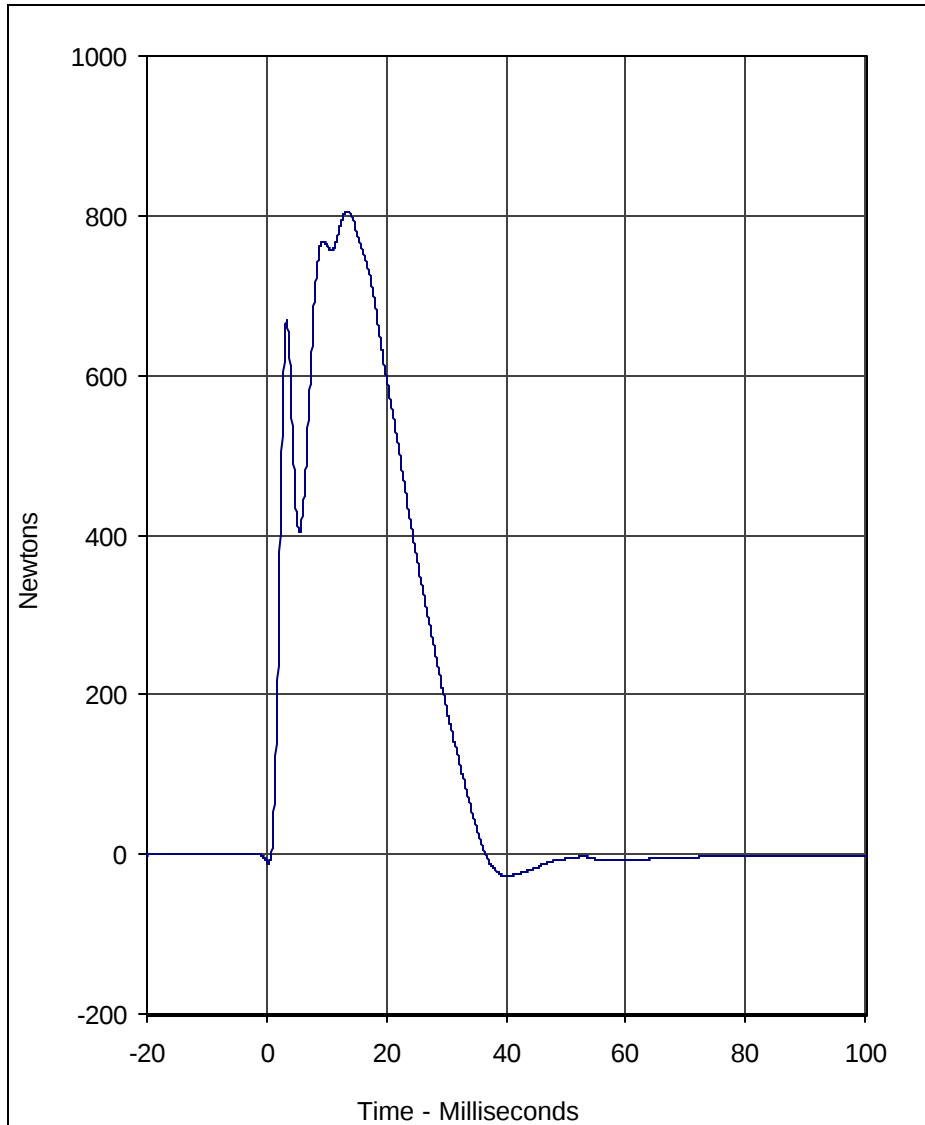

Curve Description				CURNO	Type
Probe Force				003	FIL
Units	Max	Time	Min	Time	SAE Class
Newtons	805.8	13.5	-27.8	40.0	180

Test Program: Hybrid III 3 Year Old Thorax Impact

Test Date: 2/14/03

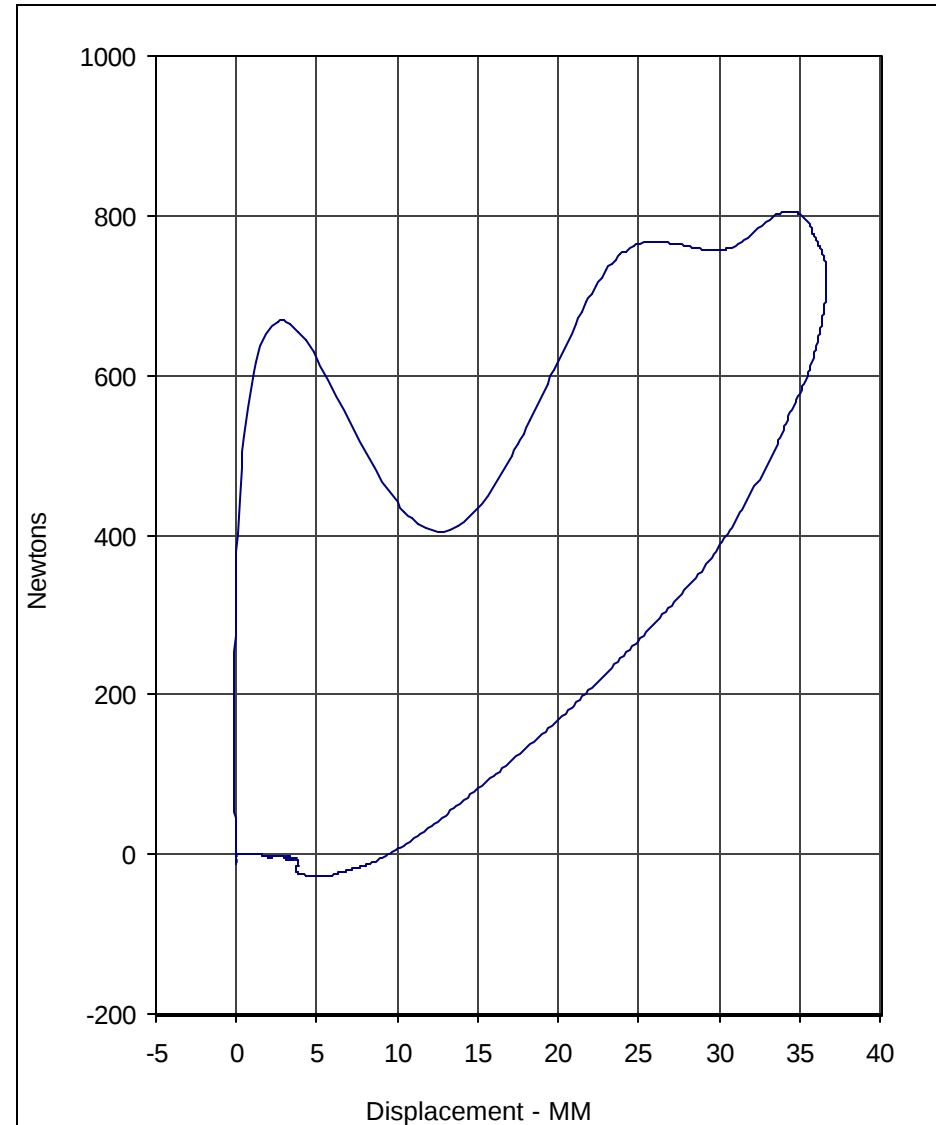

Curve Description			CURNO	Type
Probe Force vs. Chest Displacement			004	FIL
Units	Hysteresis	SAE Class		
%	69.8	180		

A.T.D. Serial No.: 082

Test I.D.: CH02A





Calibration Data Sheet

Hybrid III 3 Year Old

Neck Flexion Test

ATD Serial No.: 082


Test I.D.: NE02A

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Velocity		m/s	5.40 to 5.60	5.43	Pass
Pendulum Deceleration	10 Msec.	m/s	2.0 to 2.7	2.2	Pass
	20 Msec.	m/s	3.0 to 4.0	4.0	Pass
	30 Msec.	m/s	4.0 to 5.1	4.7	Pass
"D" Plane Rotation	Maximum	Degrees	70.0 to 82.0	73.6	Pass
Peak Moment in Rotation	Maximum	Nm	42.0 to 53.0	43.3	Pass
Positive Moment Decay, Time to 10Nm		Msec.	60.0 to 80.0	73.2	Pass
Overall Test Results					Pass

Laboratory Technician

February 14, 2003


Test Date

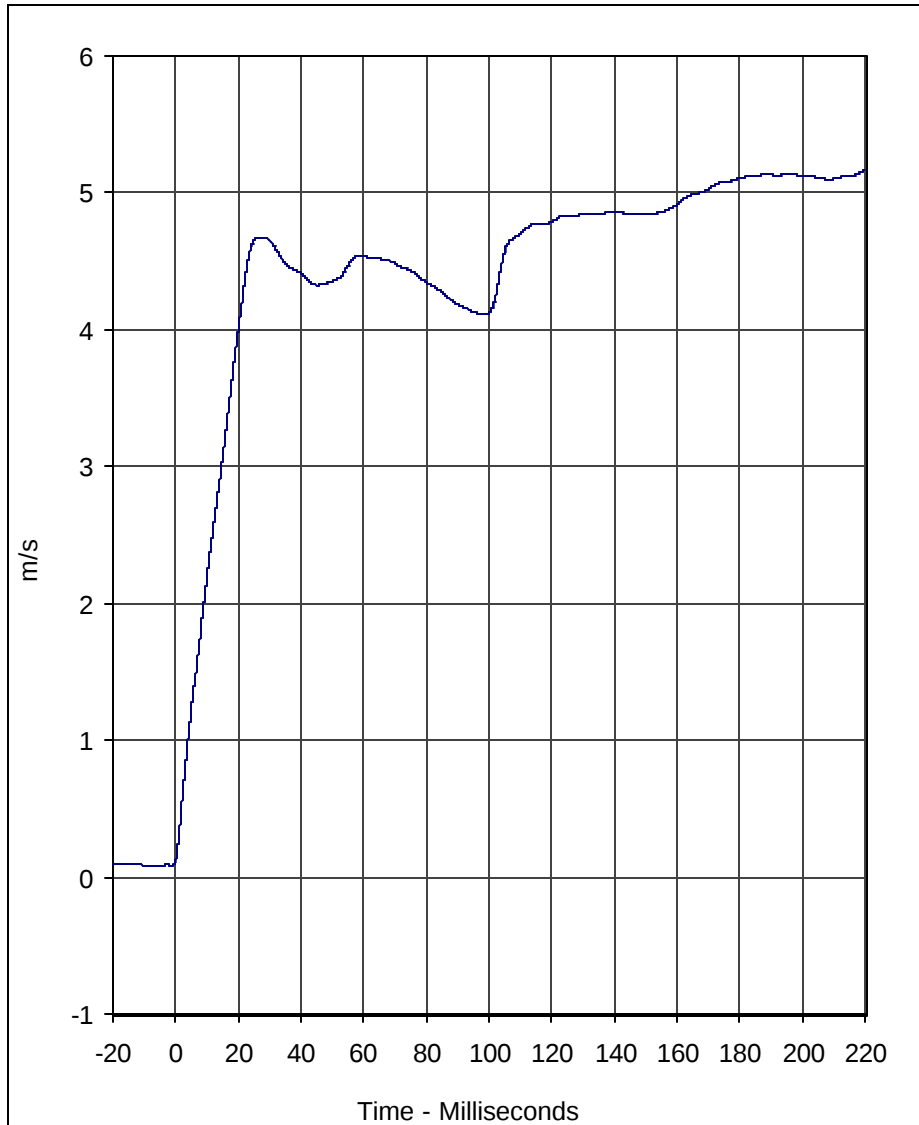

Curve Description				CURNO	Type
Pendulum Velocity				001	FIL
Units	Max	Time	Min	Time	SAE Class
m/s	5.2	220.0	0.1	-1.0	180

Test Program: 3 Year Old Hybrid III Neck Flexion Test

Test Date: 2/14/03

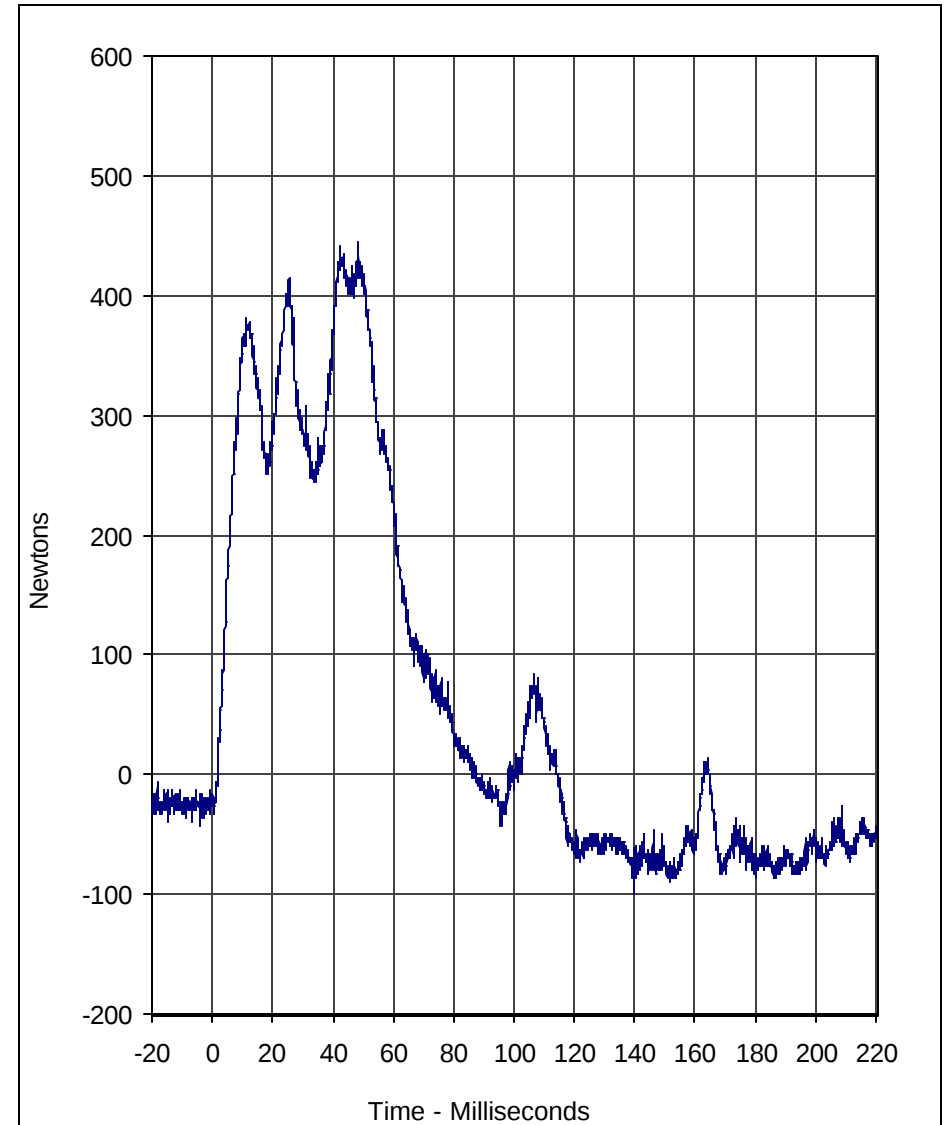


Curve Description				CURNO	Type
Neck Force X				002	FIL
Units	Max	Time	Min	Time	SAE Class
Newtons	444.3	48.6	-99.8	139.7	1000

A.T.D. Serial No.: 082

Test I.D.: NE02A



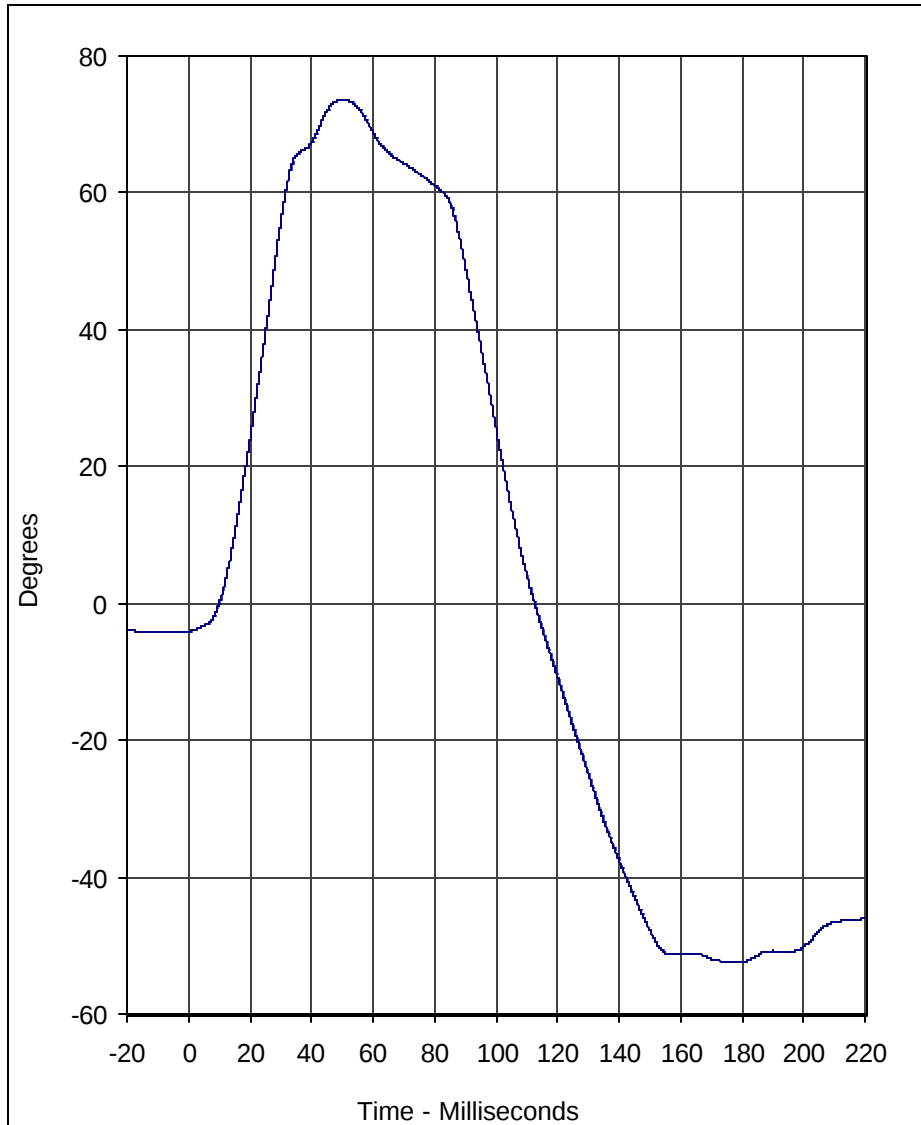


Curve Description				CURNO	Type
"D" Plane Rotation				003	FIL

Units	Max	Time	Min	Time	SAE Class
Degrees	73.6	50.1	-52.5	177.8	60

Test Program: 3 Year Old Hybrid III Neck Flexion Test

Test Date: 2/14/03

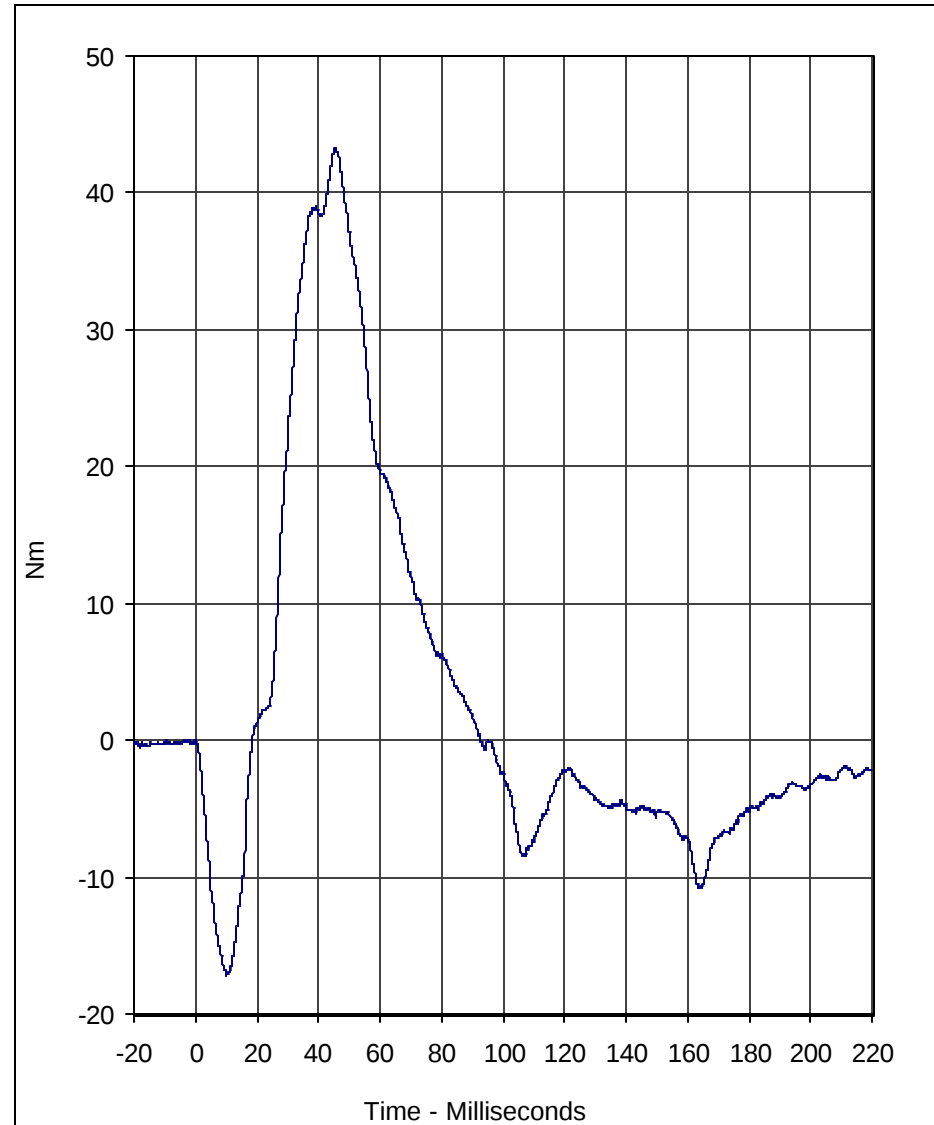

Curve Description				CURNO	Type
Neck Moment Y				002	FIL

Units	Max	Time	Min	Time	SAE Class
Nm	43.3	45.6	-17.3	10.1	600

A.T.D. Serial No.: 082

Test I.D.: NE02A





Calibration Data Sheet

Hybrid III 3 Year Old

Neck Extension Test

ATD Serial No.: 082


Test I.D.: NF03A

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Velocity		m/s	3.55 to 3.75	3.72	Pass
Pendulum Deceleration	10 Msec.	m/s	1.0 to 1.4	1.2	Pass
	20 Msec.	m/s	1.9 to 2.5	2.4	Pass
	30 Msec.	m/s	2.8 to 3.5	2.9	Pass
"D" Plane Rotation	Maximum	Degrees	83.0 to 93.0	91.4	Pass
Peak Moment in Rotation	Maximum	Nm	-43.7 to -53.3	-47.2	Pass
Positive Moment Decay, Time to 10Nm		Msec.	60.0 to 80.0	73.8	Pass
Overall Test Results					Pass

Laboratory Technician

February 14, 2003


Test Date

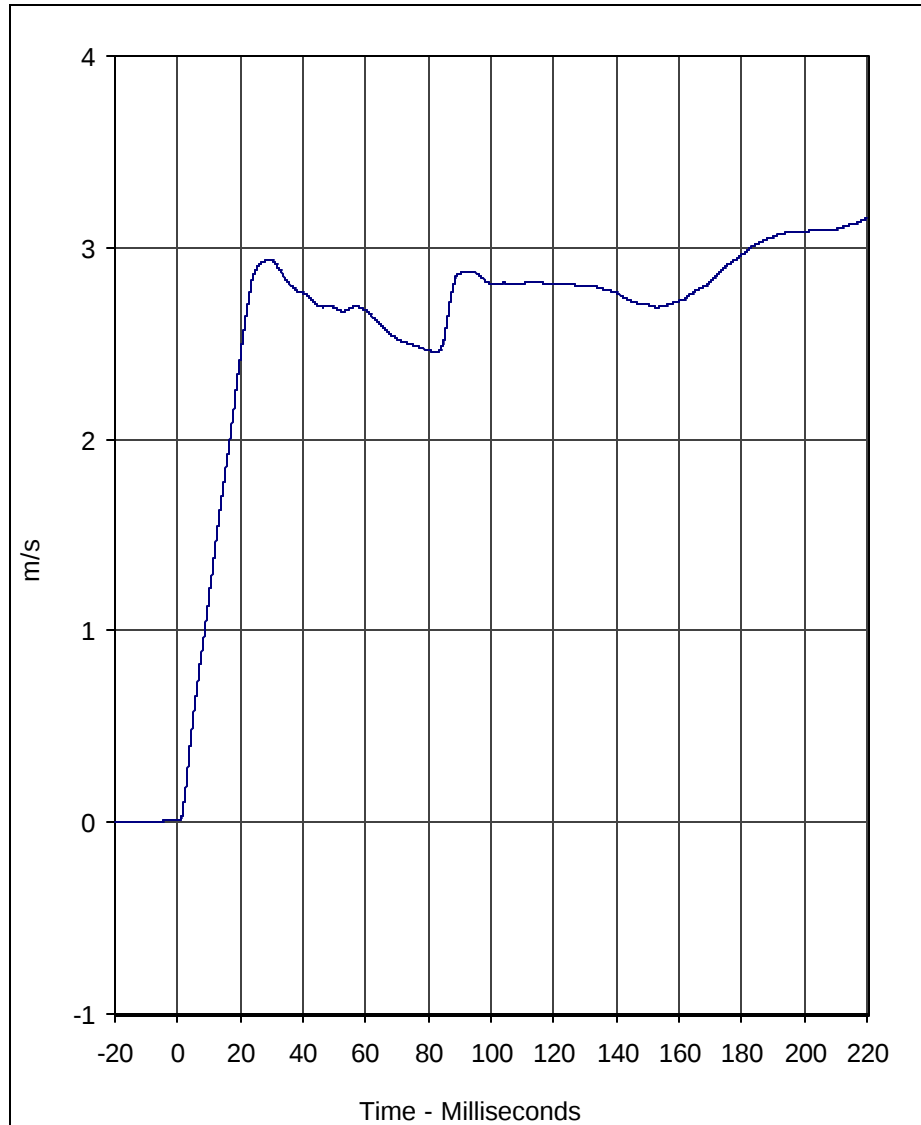

Curve Description				CURNO	Type
Pendulum Velocity				001	FIL
Units	Max	Time	Min	Time	SAE Class
m/s	3.2	220.0	0.0	-20.0	180

Test Program: 3 Year Old Hybrid III Neck Extension Test

Test Date: 2/14/03

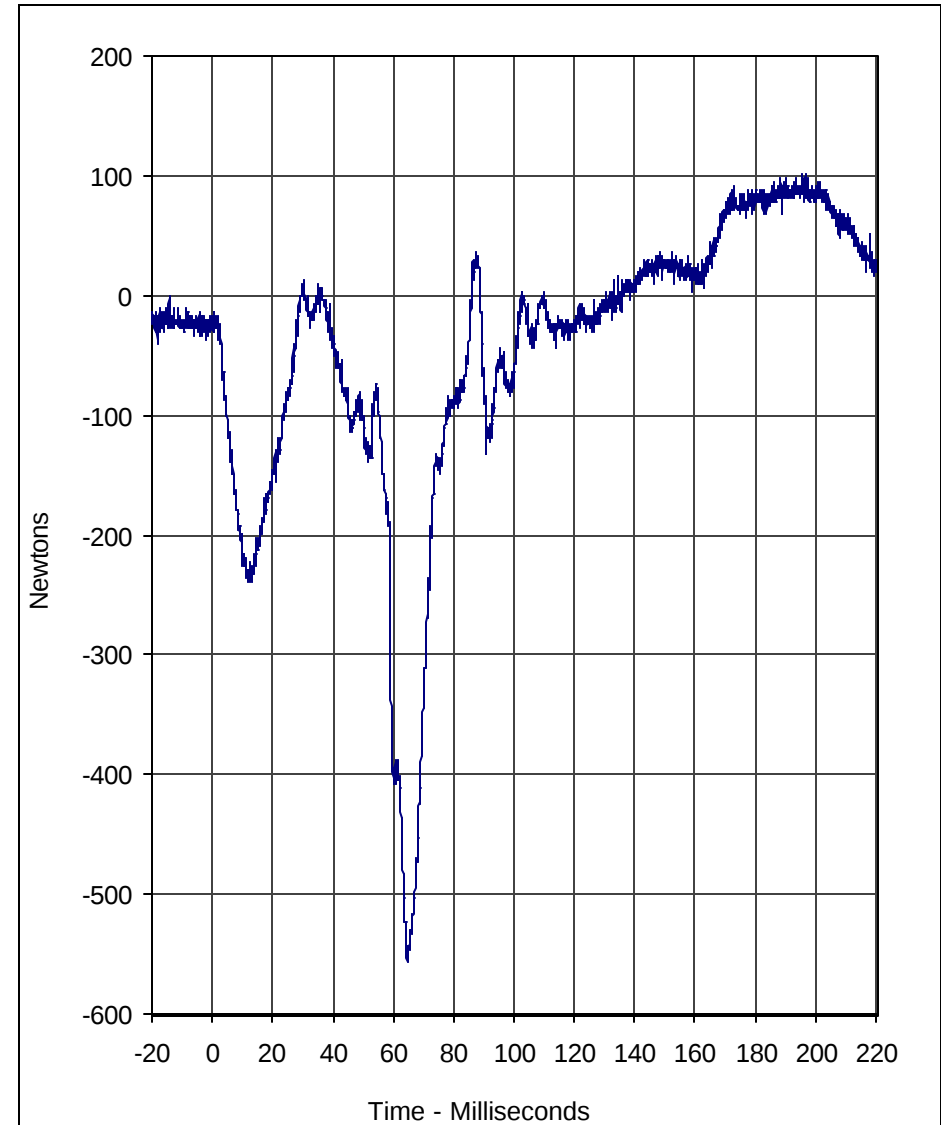


Curve Description				CURNO	Type
Neck Force X				002	FIL
Units	Max	Time	Min	Time	SAE Class
Newtons	101.3	195.4	-557.1	64.6	1000

A.T.D. Serial No.: 082

Test I.D.: NF03A




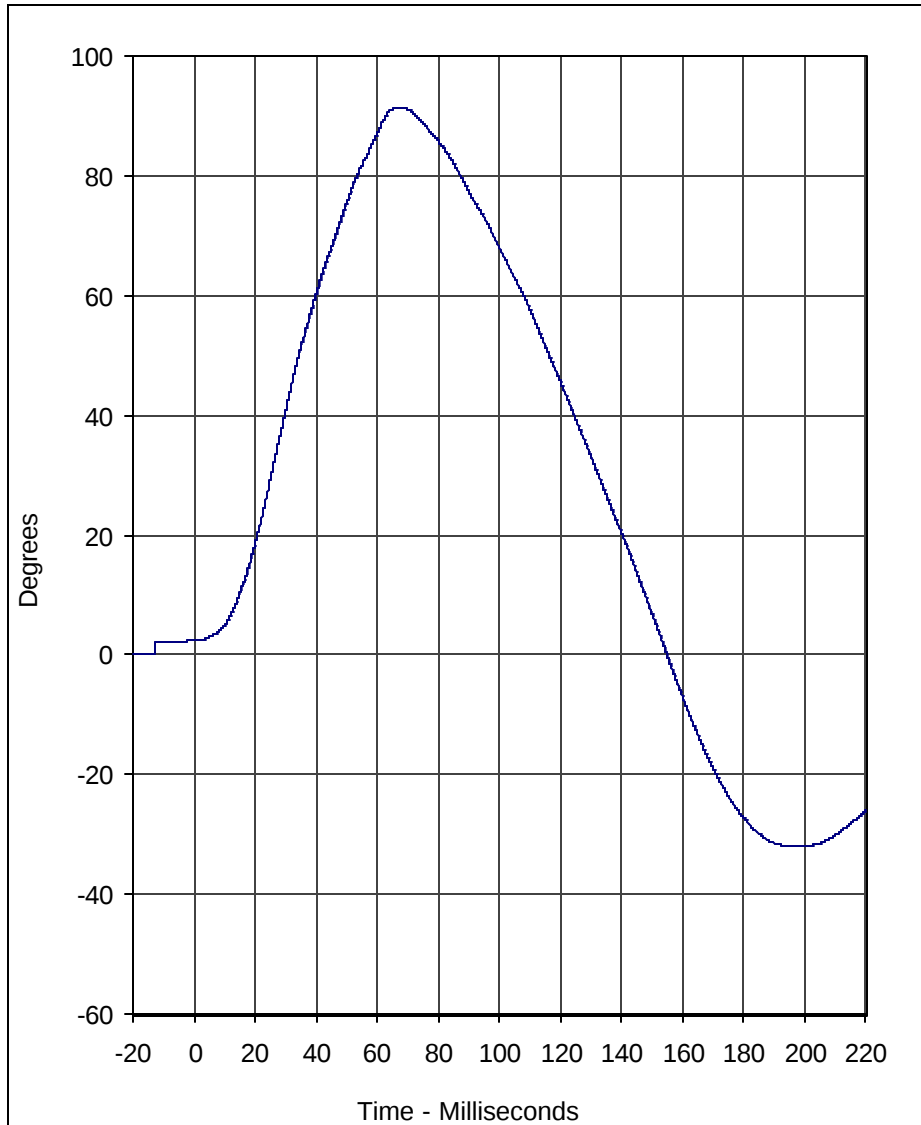

Curve Description				CURNO	Type
"D" Plane Rotation				003	FIL
Units	Max	Time	Min	Time	SAE Class
Degrees	91.4	67.1	-32.0	196.8	60

Test Program: 3 Year Old Hybrid III Neck Extension Test

Test Date: 2/14/03

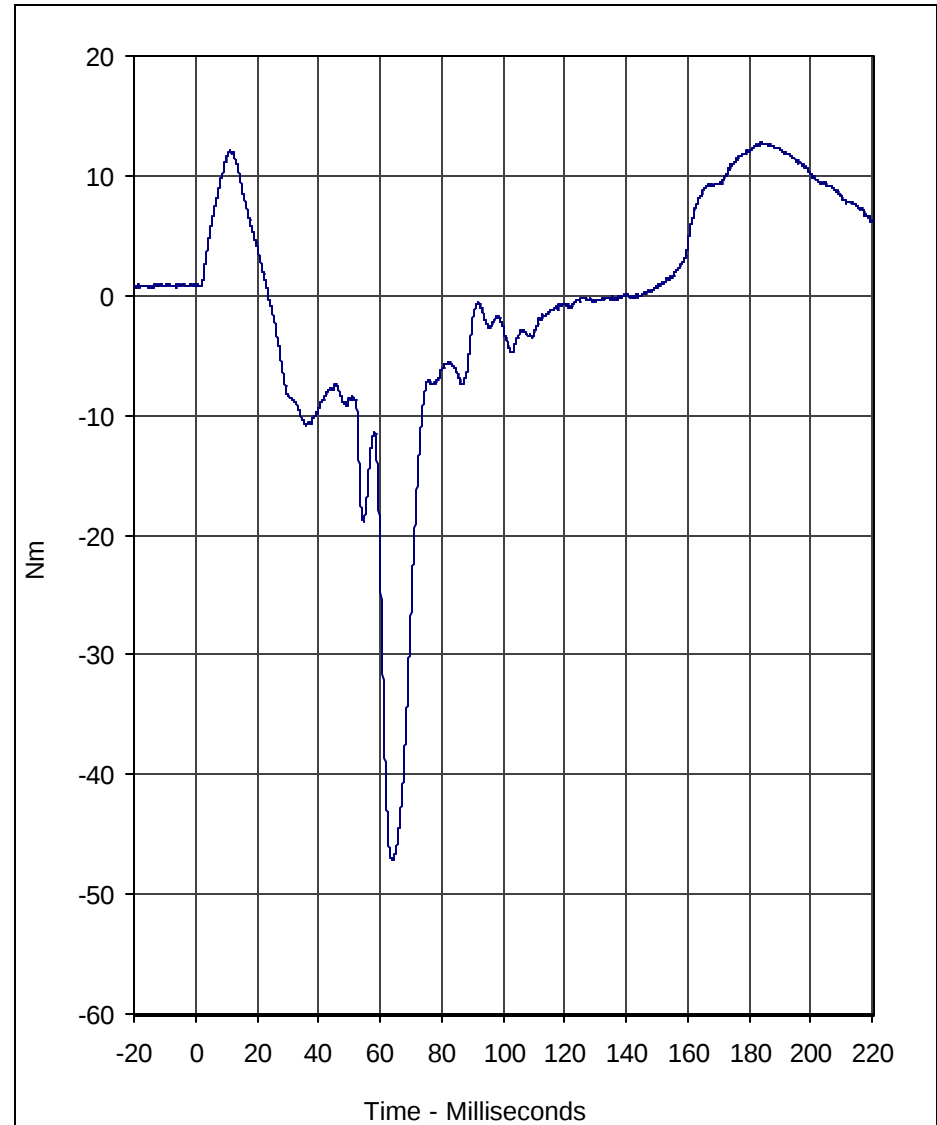

Curve Description				CURNO	Type
Neck Moment Y				002	FIL
Units	Max	Time	Min	Time	SAE Class
Nm	12.8	184.1	-47.2	64.0	600

A.T.D. Serial No.: 082

Test I.D.: NF03A





Calibration Data Sheet

Hybrid III 3 Year Old

Torso Flexion Test

ATD Serial No.: 082

Test I.D.: LF02A

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	18.9 to 25.6	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Initial reference plane angle	Degrees	≤15.0	4.2	Pass
Peak Force at 45 +/-0.5 degrees	Newtons	130.0 to 180.0	170.0	Pass
Torso rotation rate	deg/sec	0.5 to 1.5	0.7	Pass
Final reference plane angle	Degrees	+/-10	4.1	Pass
Overall Test Results				Pass

F5-12

TR-P23001-11-NC

Laboratory Technician

February 17, 2003

Test Date



Calibration Data Sheet Hybrid III 3 Year Old External Measurements

ATD Serial No.: 082

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
A - Total sitting height	mm	539 to 554	550	Pass
B - Shoulder pivot height	mm	307 to 323	315	Pass
C - "H" point height	mm	34 to 45	40	Pass
D - "H" point from backline	mm	57 to 67	60	Pass
E - Shoulder pivot from back	mm	61 to 71	65	Pass
F - Thigh clearance	mm	81 to 91	85	Pass
G - Elbow back to wrist pivot	mm	247 to 263	260	Pass
H - Skull cap to back line	mm	48 to 58	50	Pass
I - Shoulder to elbow length	mm	185 to 201	195	Pass
J - Elbow rest height	mm	134 to 149	140	Pass
K - Buttock to knee length	mm	285 to 300	290	Pass
L - Popliteal length	mm	219 to 234	230	Pass
M - Knee pivot height	mm	242 to 257	250	Pass
N - Buttock popliteal length	mm	218 to 233	225	Pass
O - Chest depth with jacket	mm	139 to 154	150	Pass
P - Foot length	mm	138 to 148	140	Pass
R - Buttock to knee pivot length	mm	251 to 262	260	Pass
S - Head Breadth	mm	128 to 144	135	Pass
T - Head Depth	mm	167 to 183	180	Pass
U - Hip breadth	mm	201 to 216	215	Pass
V - Shoulder breadth	mm	237 to 252	245	Pass
W - Foot breadth	mm	54 to 64	60	Pass
X - Head circumference	mm	500 to 516	510	Pass
Y - Chest circumference with jacket	mm	527 to 553	550	Pass
Z - Waist circumference	mm	527 to 553	545	Pass
AA - Location for chest circumference	mm	249 to 259	255	Pass
BB - Location for waist circumference	mm	160 to 170	160	Pass
Overall Test Results				Pass

Laboratory Technician

February 17, 2003
Test Date



Calibration Data Sheet Hybrid III 3 Year Old Head Drop Test

ATD Serial No.: 139

Test I.D.: HD03C

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	18.9 to 25.6	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Peak Resultant Acceleration	G's	250.0 to 280.0	263.2	Pass
Peak Lateral Acceleration	G's	≤15.0	2.6	Pass
Is Acceleration Unimodal?	Yes/No	Yes	Yes	Pass
Oscillations After Main Pulse	%	<10	2.7	Pass
Overall Test Results				Pass


F5-14

TR-P23001-11-NC

Laboratory Technician


February 14, 2003

Test Date

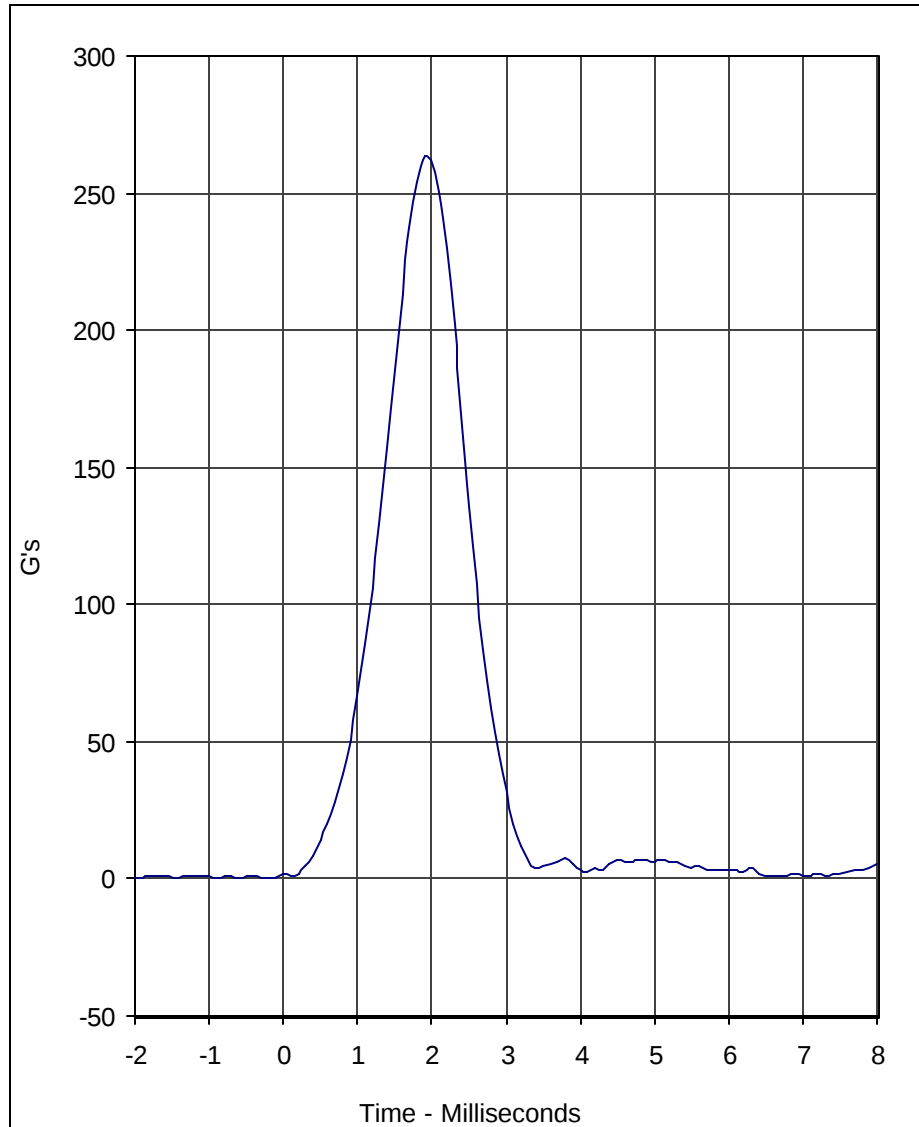

Curve Description				CURNO	Type
Head Resultant				001	RES
Units	Max	Time	Min	Time	SAE Class
G's	263.2	1.9	0.3	-1.5	1000

Test Program: Hybrid III 3 Year Old Head Drop Test
 Test Date: 2/14/03

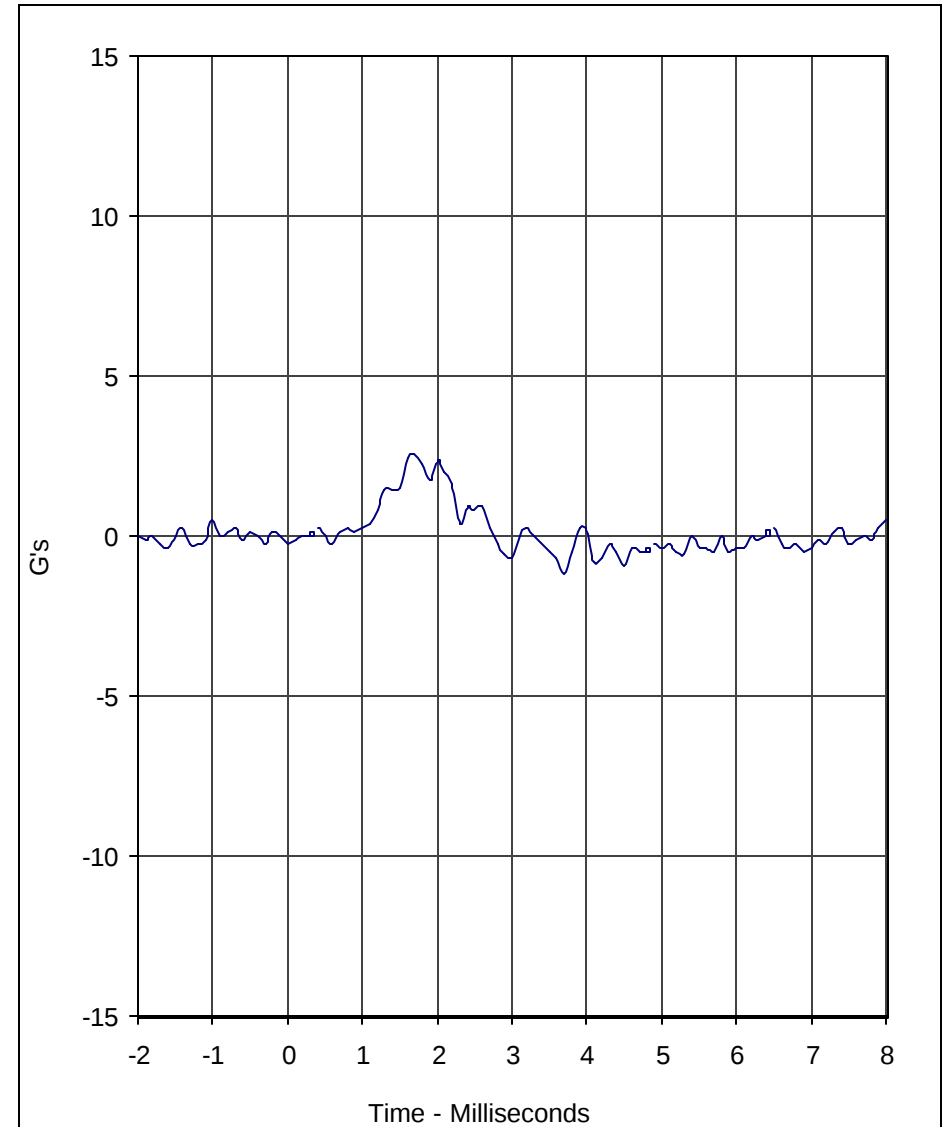

Curve Description				CURNO	Type
Head Y				002	FIL
Units	Max	Time	Min	Time	SAE Class
G's	2.6	1.7	-1.2	3.7	1000

A.T.D. Serial No.: 139
 Test I.D.: HD03C





Calibration Data Sheet

Hybrid III 3 Year Old

Thorax Impact Test

ATD Serial No.: 139

Test I.D.: CH03V

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	5.9 to 6.1	6.08	Pass
Peak Chest Compression	MM	32 to 38	35.9	Pass
Peak Probe Force Between 32 and 38 MM	Newtons	680 to 810	782.4	Pass
Peak Probe Force Between 12.5 and 32 MM	Newtons	≤860	767.6	Pass
Internal Hysteresis	%	65 to 85	70.8	Pass
Overall Test Results				Pass


F5-16

TR-P23001-11-NC

Laboratory Technician

February 14, 2003

Test Date

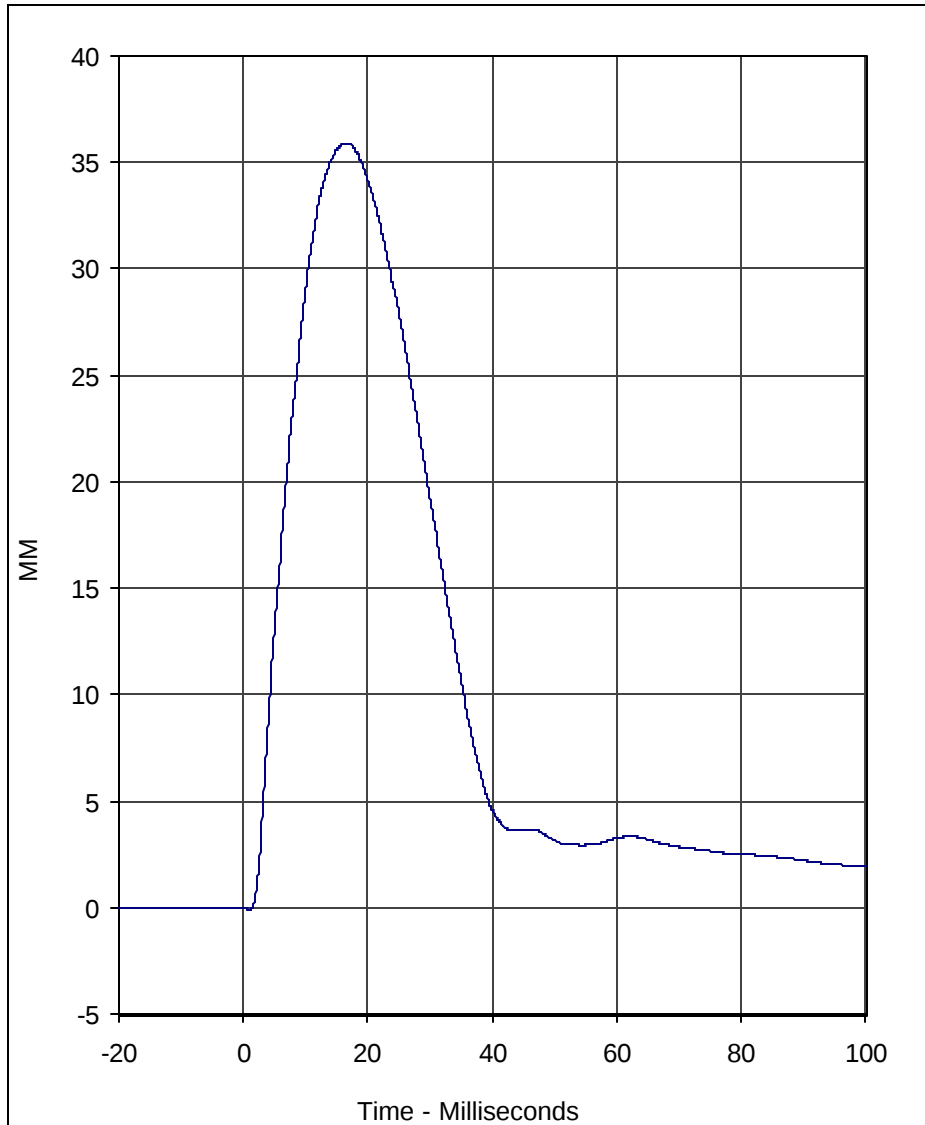


Curve Description				CURNO	Type
Chest Compression				001	FIL

Units	Max	Time	Min	Time	SAE Class
MM	35.9	16.7	-0.1	1.0	180

Test Program: Hybrid III 3 Year Old Thorax Impact

Test Date: 2/14/03

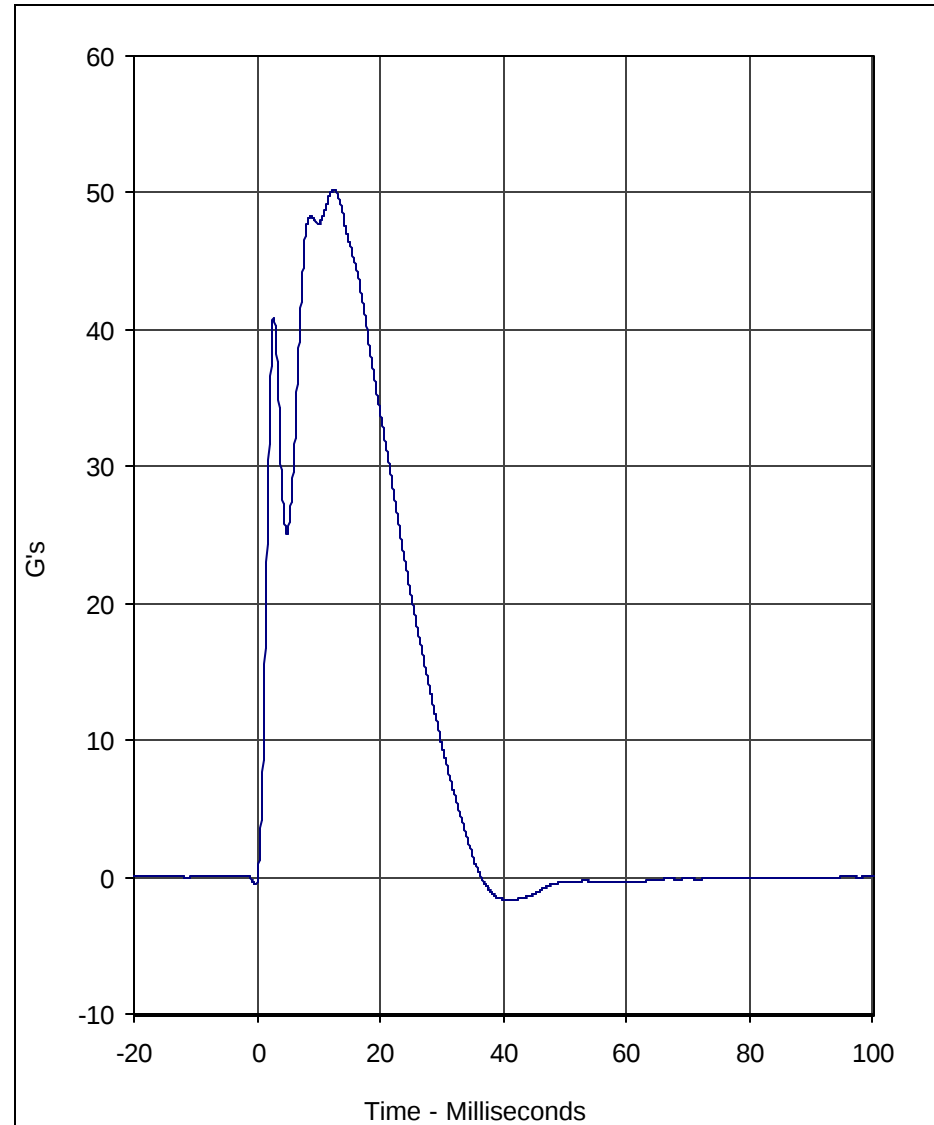


Curve Description				CURNO	Type
Probe Acceleration				002	FIL

Units	Max	Time	Min	Time	SAE Class
G's	50.3	12.6	-1.6	41.9	180

A.T.D. Serial No.: 139

Test I.D.: CH03V




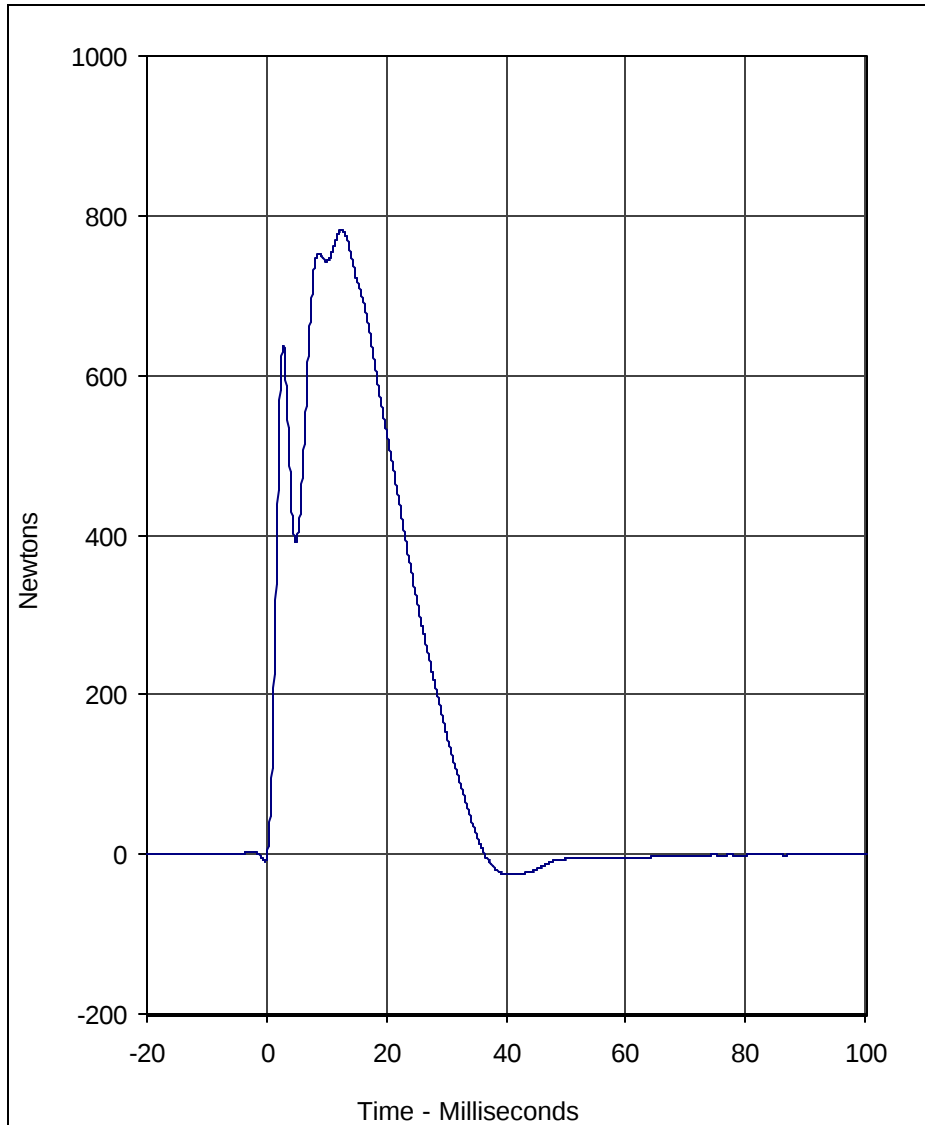

Curve Description				CURNO	Type
Probe Force				003	FIL
Units	Max	Time	Min	Time	SAE Class
Newtons	782.4	12.6	-25.6	41.9	180

Test Program: Hybrid III 3 Year Old Thorax Impact

Test Date: 2/14/03

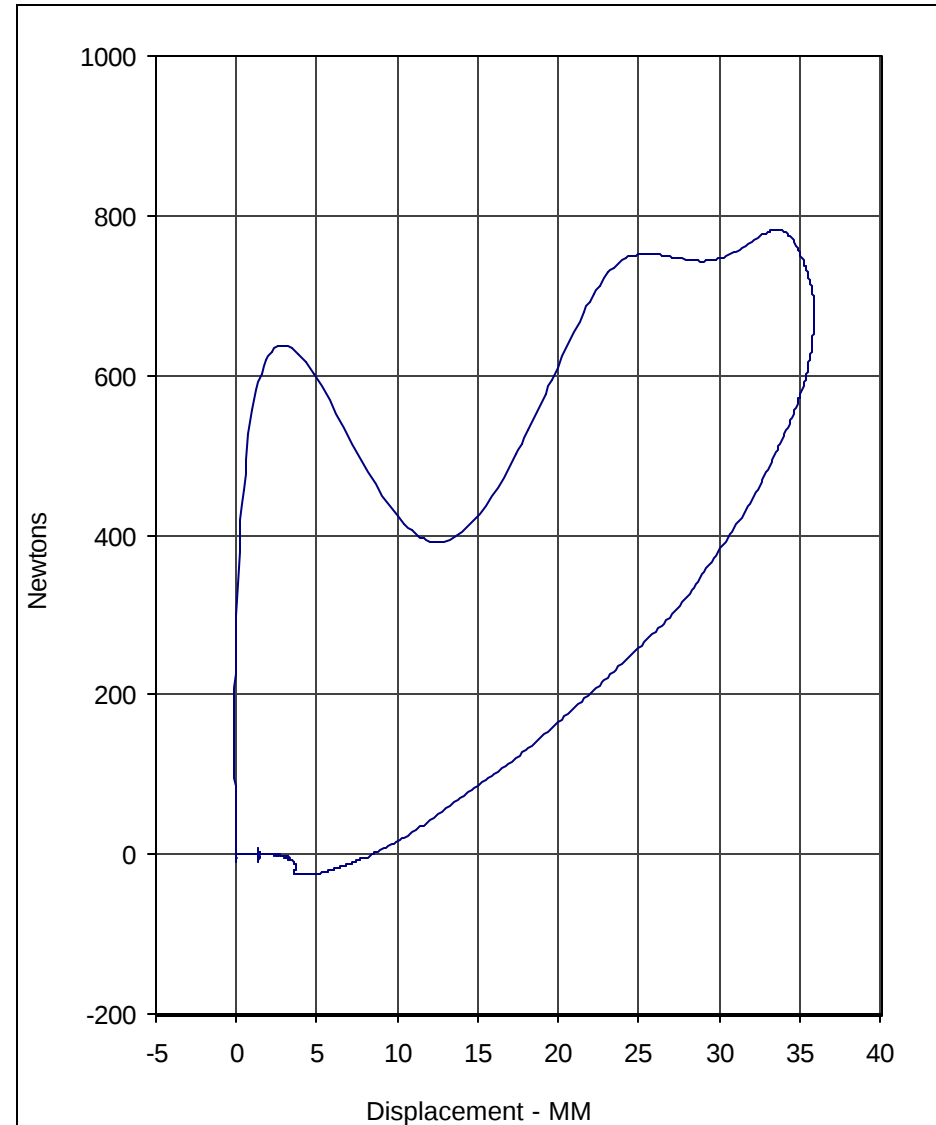

Curve Description			CURNO	Type
Probe Force vs. Chest Displacement			004	FIL
Units	Hysteresis	SAE Class		
%	70.8	180		

A.T.D. Serial No.: 139

Test I.D.: CH03V





Calibration Data Sheet

Hybrid III 3 Year Old

Neck Flexion Test


ATD Serial No.: 139

Test I.D.: NF03F

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Velocity		m/s	5.40 to 5.60	5.55	Pass
Pendulum Deceleration	10 Msec.	m/s	2.0 to 2.7	2.1	Pass
	20 Msec.	m/s	3.0 to 4.0	4.0	Pass
	30 Msec.	m/s	4.0 to 5.1	4.7	Pass
"D" Plane Rotation	Maximum	Degrees	70.0 to 82.0	76.5	Pass
Peak Moment in Rotation	Maximum	Nm	42.0 to 53.0	45.0	Pass
Positive Moment Decay, Time to 10Nm		Msec.	60.0 to 80.0	73.7	Pass
Overall Test Results					Pass

Laboratory Technician


February 14, 2003
Test Date

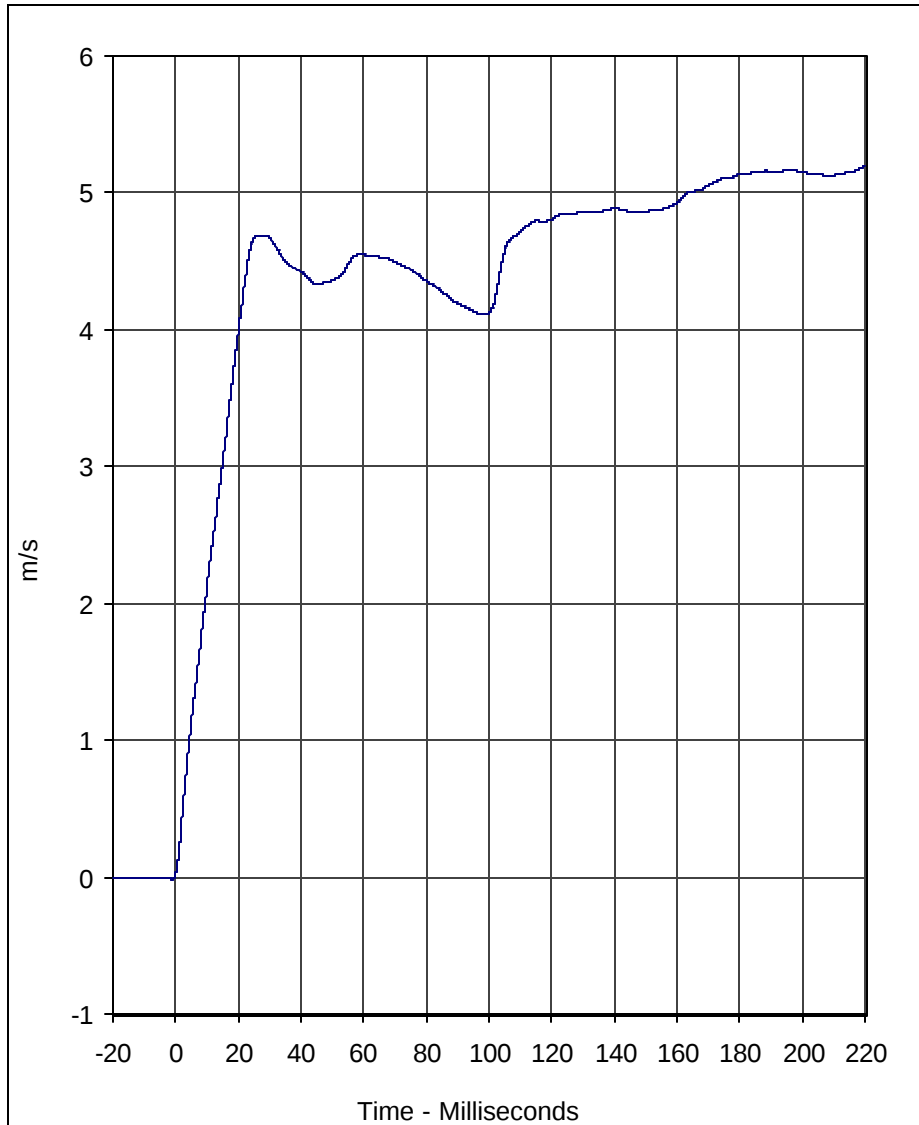

Curve Description				CURNO	Type
Pendulum Velocity				001	FIL
Units	Max	Time	Min	Time	SAE Class
m/s	5.2	220.0	0.0	-0.9	180

Test Program: 3 Year Old Hybrid III Neck Flexion Test

Test Date: 2/14/03

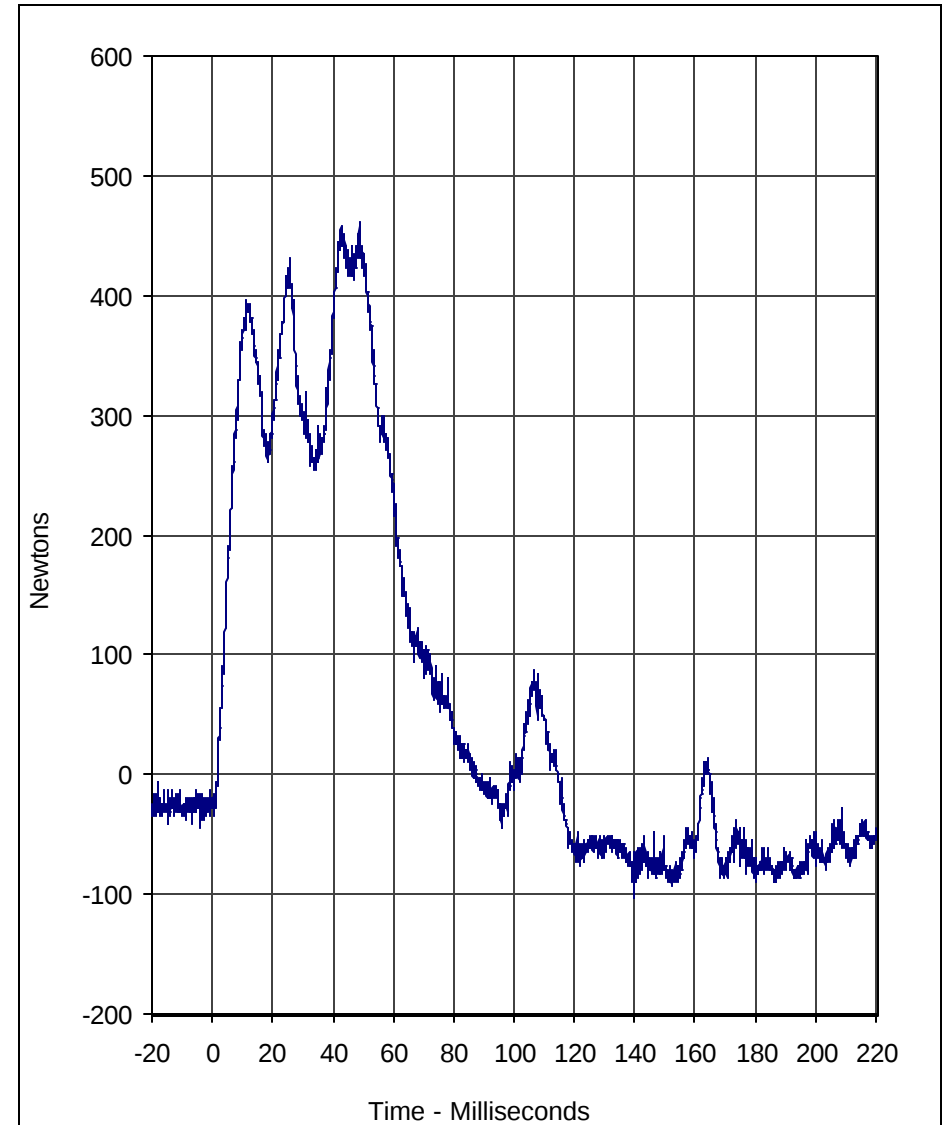


Curve Description				CURNO	Type
Neck Force X				002	FIL
Units	Max	Time	Min	Time	SAE Class
Newtons	461.8	48.7	-103.7	139.8	1000

A.T.D. Serial No.: 139

Test I.D.: NF03F




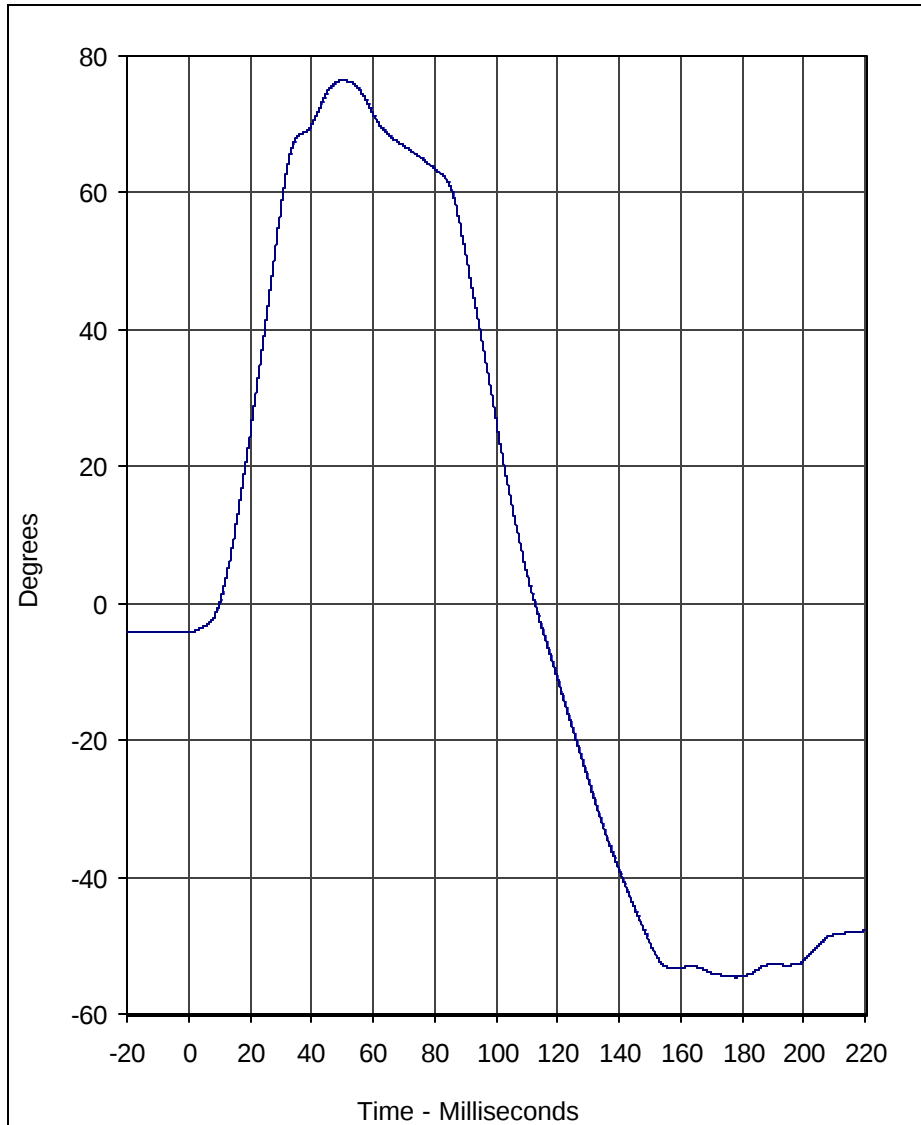

Curve Description				CURNO	Type
"D" Plane Rotation				003	FIL
Units	Max	Time	Min	Time	SAE Class
Degrees	76.5	50.2	-54.6	177.9	60

Test Program: 3 Year Old Hybrid III Neck Flexion Test

Test Date: 2/14/03

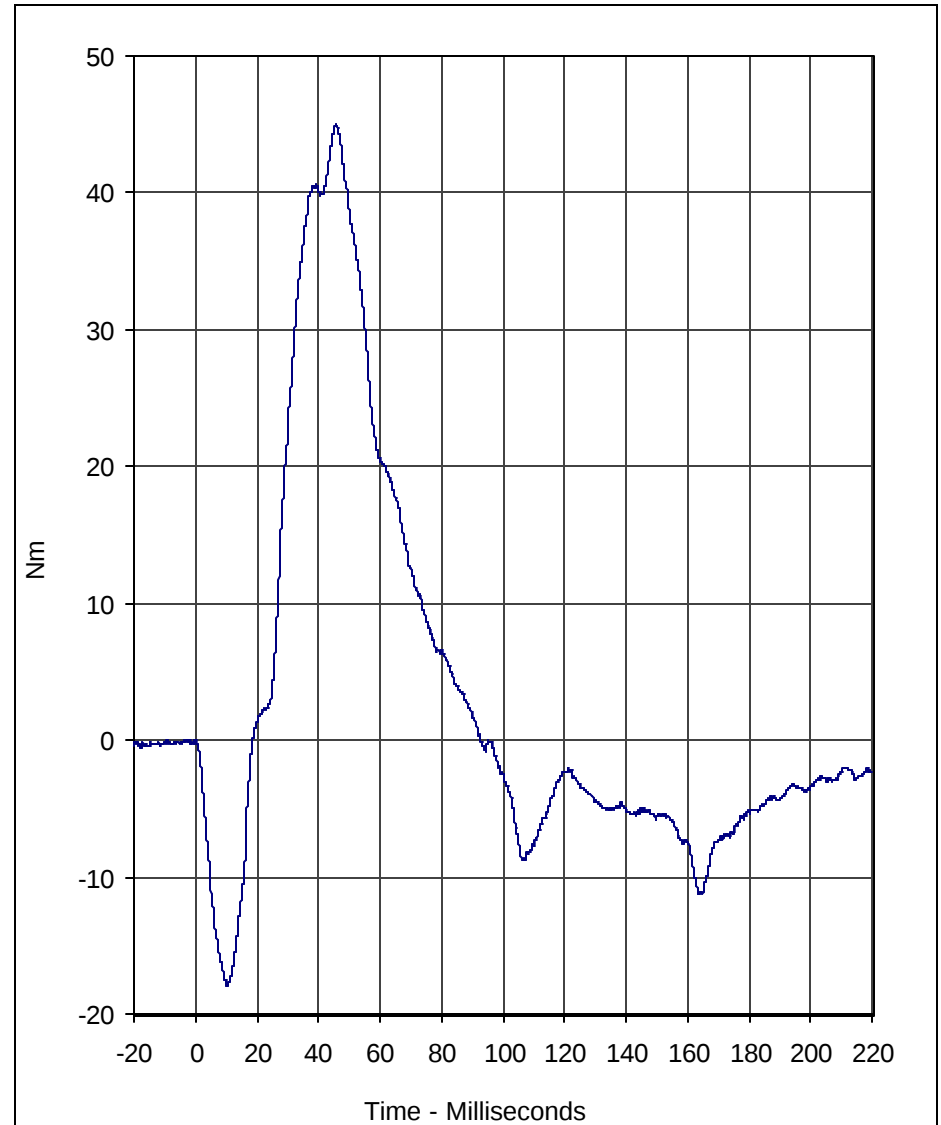

Curve Description				CURNO	Type
Neck Moment Y				002	FIL
Units	Max	Time	Min	Time	SAE Class
Nm	45.0	45.7	-17.9	10.2	600

A.T.D. Serial No.: 139

Test I.D.: NF03F





Calibration Data Sheet

Hybrid III 3 Year Old

Neck Extension Test

ATD Serial No.: 139


Test I.D.: 3Y01D

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Velocity		m/s	3.55 to 3.75	3.72	Pass
Pendulum Deceleration	10 Msec.	m/s	1.0 to 1.4	1.2	Pass
	20 Msec.	m/s	1.9 to 2.5	2.5	Pass
	30 Msec.	m/s	2.8 to 3.5	3.0	Pass
"D" Plane Rotation	Maximum	Degrees	83.0 to 93.0	92.5	Pass
Peak Moment in Rotation	Maximum	Nm	-43.7 to -53.3	-52.1	Pass
Positive Moment Decay, Time to 10Nm		Msec.	60.0 to 80.0	68.7	Pass
Overall Test Results					Pass

Laboratory Technician

February 14, 2003


Test Date

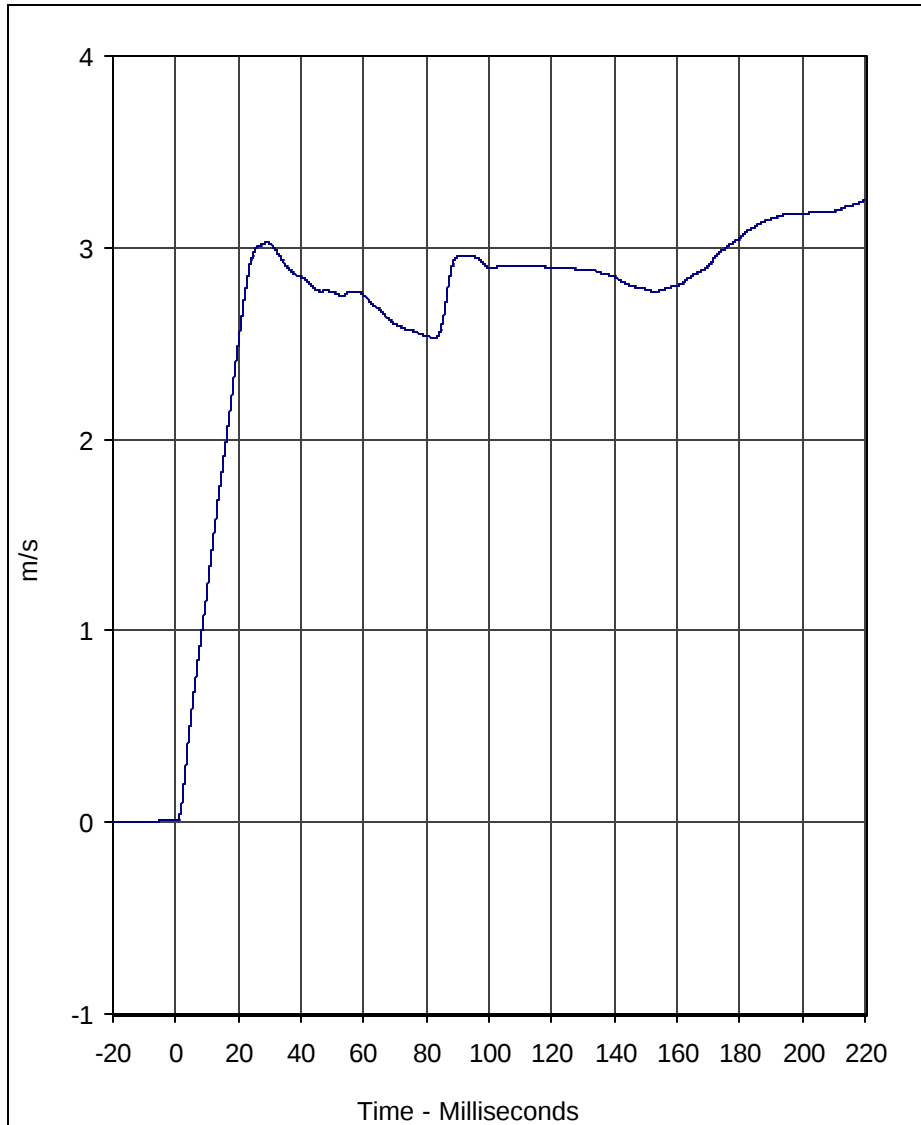

Curve Description				CURNO	Type
Pendulum Velocity				001	FIL
Units	Max	Time	Min	Time	SAE Class
m/s	3.3	220.0	0.0	-20.0	180

Test Program: 3 Year Old Hybrid III Neck Extension Test

Test Date: 2/14/03

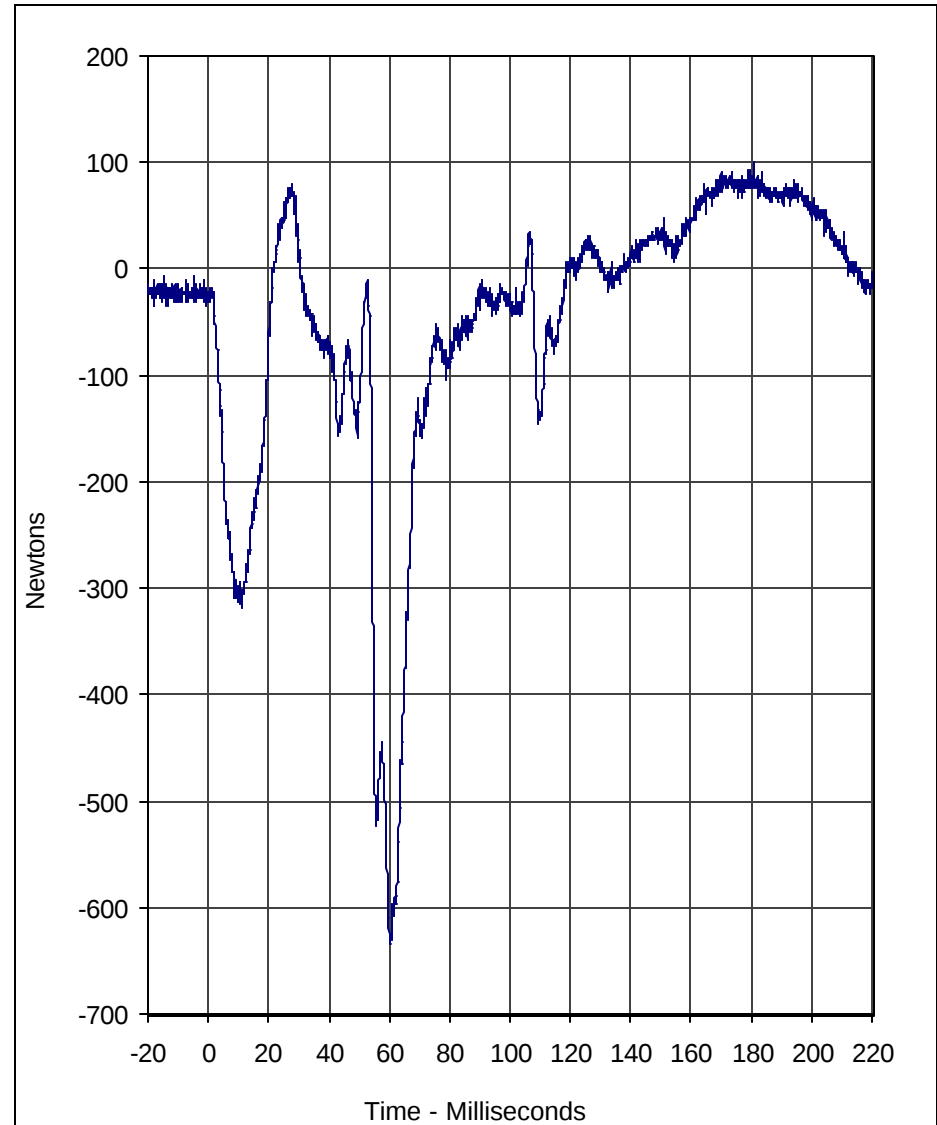


Curve Description				CURNO	Type
Neck Force X				002	FIL
Units	Max	Time	Min	Time	SAE Class
Newtons	100.6	180.8	-634.8	60.4	1000

A.T.D. Serial No.: 139

Test I.D.: 3Y01D




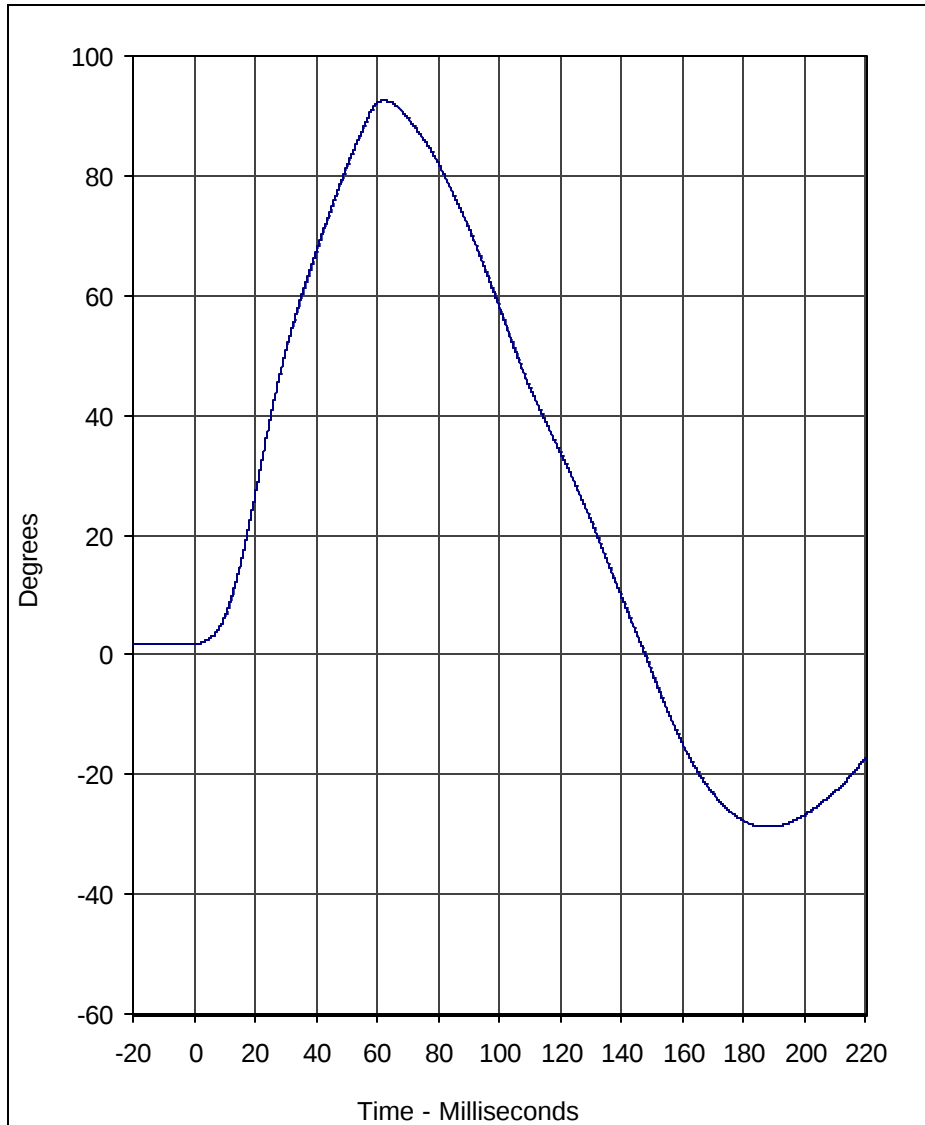

Curve Description				CURNO	Type
"D" Plane Rotation				003	FIL
Units	Max	Time	Min	Time	SAE Class
Degrees	92.5	62.5	-28.7	188.2	60

Test Program: 3 Year Old Hybrid III Neck Extension Test

Test Date: 2/14/03

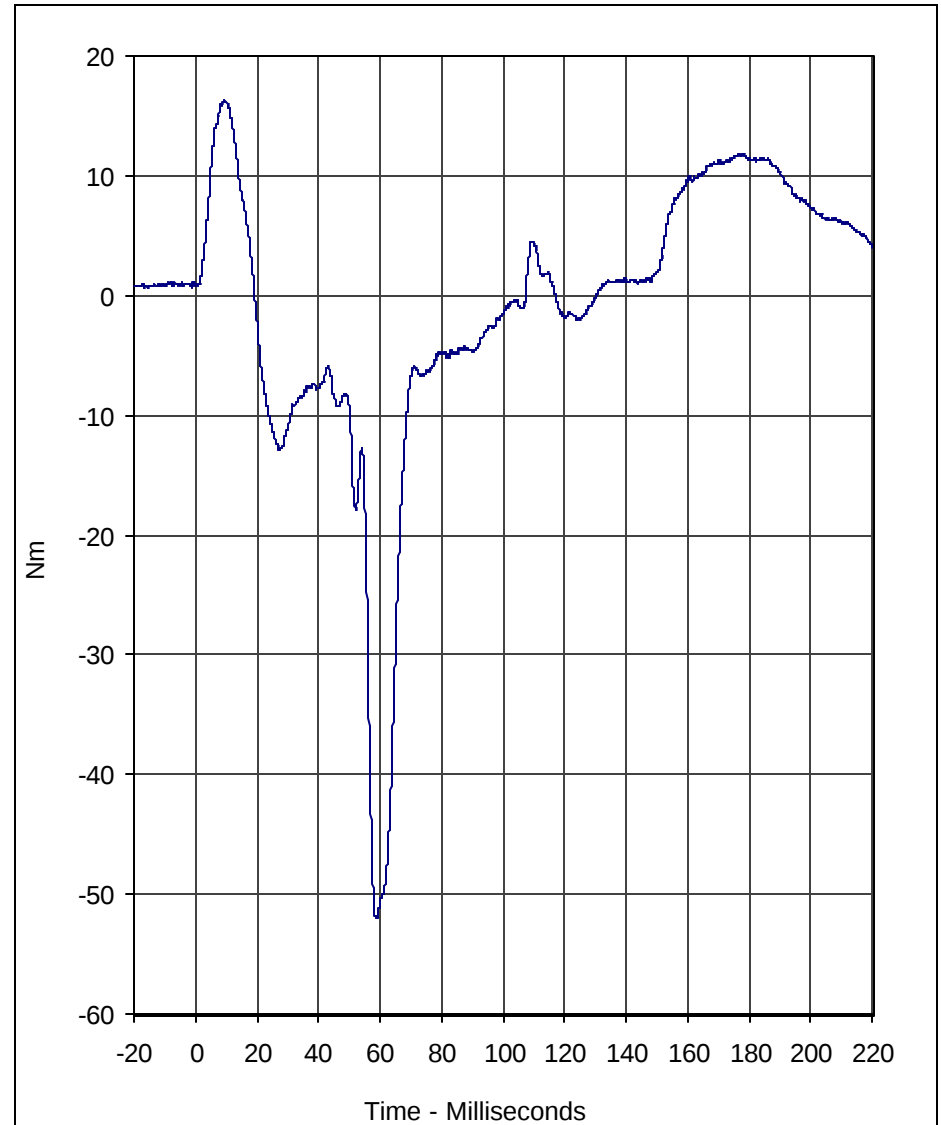

Curve Description				CURNO	Type
Neck Moment Y				002	FIL
Units	Max	Time	Min	Time	SAE Class
Nm	16.3	9.3	-52.1	58.9	600

A.T.D. Serial No.: 139

Test I.D.: 3Y01D





Calibration Data Sheet

Hybrid III 3 Year Old

Torso Flexion Test

ATD Serial No.: 139

Test I.D.: TF03F

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	18.9 to 25.6	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Initial reference plane angle	Degrees	≤15.0	6.4	Pass
Peak Force at 45 +/-0.5 degrees	Newtons	130.0 to 180.0	167.4	Pass
Torso rotation rate	deg/sec	0.5 to 1.5	0.2	Pass
Final reference plane angle	Degrees	+/-10	6.2	Pass
Overall Test Results			Pass	

F5-25

TR-P23001-11-NC

Laboratory Technician

February 17, 2003

Test Date



Calibration Data Sheet Hybrid III 3 Year Old External Measurements

ATD Serial No.: 139

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
A - Total sitting height	mm	539 to 554	545	Pass
B - Shoulder pivot height	mm	307 to 323	310	Pass
C - "H" point height	mm	34 to 45	40	Pass
D - "H" point from backline	mm	57 to 67	60	Pass
E - Shoulder pivot from back	mm	61 to 71	65	Pass
F - Thigh clearance	mm	81 to 91	85	Pass
G - Elbow back to wrist pivot	mm	247 to 263	250	Pass
H - Skull cap to back line	mm	48 to 58	50	Pass
I - Shoulder to elbow length	mm	185 to 201	195	Pass
J - Elbow rest height	mm	134 to 149	140	Pass
K - Buttock to knee length	mm	285 to 300	290	Pass
L - Popliteal length	mm	219 to 234	230	Pass
M - Knee pivot height	mm	242 to 257	250	Pass
N - Buttock popliteal length	mm	218 to 233	220	Pass
O - Chest depth with jacket	mm	139 to 154	150	Pass
P - Foot length	mm	138 to 148	140	Pass
R - Buttock to knee pivot length	mm	251 to 262	260	Pass
S - Head Breadth	mm	128 to 144	135	Pass
T - Head Depth	mm	167 to 183	175	Pass
U - Hip breadth	mm	201 to 216	215	Pass
V - Shoulder breadth	mm	237 to 252	245	Pass
W - Foot breadth	mm	54 to 64	60	Pass
X - Head circumference	mm	500 to 516	515	Pass
Y - Chest circumference with jacket	mm	527 to 553	535	Pass
Z - Waist circumference	mm	527 to 553	545	Pass
AA - Location for chest circumference	mm	249 to 259	255	Pass
BB - Location for waist circumference	mm	160 to 170	165	Pass
Overall Test Results				Pass

Laboratory Technician

February 17, 2003
Test Date