

REPORT NUMBER: 208-MGA-2004-003

**VEHICLE SAFETY COMPLIANCE TESTING
FOR
FMVSS 208, OCCUPANT CRASH PROTECTION
FMVSS 212, WINDSHIELD MOUNTING
FMVSS 219, WINDSHIELD INTRUSION (PARTIAL)
FMVSS 301, FUEL SYSTEM INTEGRITY**

**DaimlerChrysler Corp.
2004 Dodge Durango MPV
NHTSA No.: C40303**

**PREPARED BY:
MGA RESEARCH CORPORATION
5000 WARREN ROAD
BURLINGTON, WI 53105**



Test Dates: January 26 – April 1, 2004

Final Report Date: September 24, 2004

FINAL REPORT

**PREPARED FOR:
U.S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
OFFICE OF ENFORCEMENT
OFFICE OF VEHICLE SAFETY COMPLIANCE
MAIL CODE: NVS-220
400 SEVENTH STREET, SW, ROOM 6115
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Safety Administration, in response to Contract Number DTNH22-03-D-11002.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared Jeff Lewandowski Date: September 24, 2004
Jeff Lewandowski, Project Engineer

Reviewed by: David Winkelbauer Date: September 24, 2004
David Winkelbauer, Facility Director

FINAL REPORT ACCEPTED BY OVSC:

Accepted By: _____

Acceptance Date: _____

Technical Report Documentation Page

1. Report No. 208-MGA-2004-003	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle Final Report of FMVSS 208 Compliance Testing of a 2004 Dodge Durango NHTSA No.: C40303		5. Report Date September 24, 2004	
		6. Performing Organization Code MGA	
7. Author(s) Jeff Lewandowski, Project Engineer		8. Performing Organization Report No. 208-MGA-2004-003	
9. Performing Organization Name and Address MGA Research Corporation 5000 Warren Road Burlington, WI 53105		10. Work Unit No.	
		11. Contract or Grant No. DTNH22-03-D-11002	
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Office of Enforcement Office of Vehicle Safety Compliance 400 Seventh St., S.W., Room 6115 NVS-220 Washington, D.C. 20590		13. Type of Report and Period Covered 1/26/04 to 9/24/04	
		14. Sponsoring Agency Code NVS-220	
15. Supplementary Notes			
16. Abstract Compliance tests were conducted on the subject 2004 Dodge Durango in accordance with the specifications of the Office of Vehicle Safety Compliance Test Procedure No. TP208-12 for the determination of FMVSS 208 compliance. Test failures identified were as follows: TEST FAILURES: S.4.5.1 Air Bag Labels			
17. Key Words Frontal Impact 40 kmph Vehicle Safety Compliance Testing FMVSS 208, "Occupant Crash Protection" FMVSS 212, "Windshield Mounting" FMVSS 219, (partial), "Windshield Zone Intrusion" FMVSS 301, "Fuel System Integrity"		18. Distribution Statement Copies of this report are available from the following: NHTSA Technical Information Services (TIS), Mail Code: NPO-230 400 Seventh Street, S.W., Room 5108 Washington, D.C. 20590 Tel. No.: (202) 366-4946	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 496	22. Price

Form DOT F1700.7 (8-72)

TABLE OF CONTENTS

<u>Section</u>	<u>Page No</u>
1 Purpose of Compliance Test	1
2 Tests Performed	2
3 Injury Result Summary	4
4 Discussion of Test (if applicable)	8
5 Test Data Sheets	9
 <u>Data Sheet</u>	
1 COTR Vehicle Work Order	10
2 Report of Vehicle Condition	14
3 Certification Label and Tire Placard Information	16
4 Rear Outboard Seating Position Seat Belts	17
5 Air Bag Labels	18
6 Readiness Indicator	30
7 Passenger Air Bag Manual Cut-Off Device	31
8 Lap Belt Lockability	35
9 Seat Belt Warning System	47
10 Belt Contact Force	49
11 Latch Plate Access	63
12 Seat Belt Retraction	71
13 Seat Belt Guides and Hardware	79
14 Marking of Reference Points for Various Test Positions & Points	93
15 Summary of Suppression Test Using 12-Month CRABI Dummy	100
16 Summary of Suppression Test Using Newborn Infant Dummy	107
23 Summary of Low Risk Deployment Using an Unbelted 3-Year-Old Dummy Position 1	108
24 Summary of Low Risk Deployment Using an Unbelted 3-Year-Old Dummy Position 2	109
25 Summary of Low Risk Deployment Using an Unbelted 6-Year-Old Dummy Position 1	110
26 Summary of Low Risk Deployment Using an Unbelted 6-Year-Old Dummy Position 2	111
27 Summary of Low Risk Deployment Using an Unbelted 5 th % Dummy Position 1	112
28 Summary of Low Risk Deployment Using an Unbelted 5 th % Dummy Position 2	113
30 Vehicle Weight, Fuel Tank, and Attitude Data	114

<u>Data Sheet</u>		<u>Page No</u>
31	Vehicle Accelerometer Locations and Measurements	118
32	Photographic Targets	121
33	Camera Locations	127
34	Dummy Positioning	129
35	Dummy Measurements	146
36	Crash Test	150
38	Accident Investigation Measurements	152
39	Windshield Mounting (FMVSS 212)	154
40	Windshield Zone Intrusion (FMVSS 219)	156
41	Fuel System Integrity (FMVSS 301)	158
 <u>Appendix</u>		
A	Crash Test Data	A-1
B	Low Risk Test Data	B-1
C	Crash Test Photographs	C-1
D	Low Risk Photographs	D-1
E	Suppression Photographs	E-1
F	Instrumentation Calibration	F-1
G	Notice of Test Failure (If Applicable)	G-1

SECTION 1

PURPOSE OF COMPLIANCE TEST

This Federal Motor Vehicle Safety Standard (FMVSS) 208 compliance test is part of a program conducted for the National Highway Traffic Safety Administration (NHTSA) by MGA Research Corporation (MGA) under Contract No. DTNH22-03-D-11002. The purpose of this test was to determine whether the subject vehicle, a 2004 Dodge Durango, NHTSA No. C40303, meets certain performance requirements of FMVSS 208, "Occupant Crash Protection"; FMVSS 212, "Windshield Mounting"; FMVSS 219, "Windshield Zone Intrusion"; and FMVSS 301, "Fuel System Integrity". The compliance test was conducted in accordance with OVSC Laboratory Test Procedure No. TP208-12 dated January 14, 2003.

A 50th percentile dummy was placed in the center rear designated seating position for the crash test. The data from this position will be used for research and development. This seating position does not have crash test performance requirements.

SECTION 2 TESTS PERFORMED

Test Vehicle: 2004 Dodge Durango
Test Program: FMVSS 208 Compliance

NHTSA No.: C40303
Test Dates: 1/26-4/1/04

The following checked items indicate the tests that were performed:

- | | | |
|-------------------------------------|-----|---|
| ☒ | 1. | Rear outboard seating position seat belts (S4.1.1.2(b) & (S4.2.4) |
| ☒ | 2. | Air bag labels (S4.5.1) |
| ☒ | 3. | Readiness indicator (S4.5.2) |
| ☒ | 4. | Passenger air bag manual cut-off device (S4.5.4) |
| ☒ | 5. | Lap belt lockability (S7.1.1.5) |
| ☒ | 6. | Seat belt warning system (S7.3) |
| ☒ | 7. | Seat belt contact force (S7.4.4) |
| ☒ | 8. | Seat belt latch plate access (S7.4.4) |
| ☒ | 9. | Seat belt retraction (S7.4.5) |
| ☒ | 10. | Seat belt guides and hardware (S7.4.6) |
| ☒ | 11. | Suppression tests with 12-month-old CRABI dummy (Part 572, Subpart R) |
| ☒ | 12. | Suppression tests with newborn infant (Part 572, Subpart K) |
| ☐ | 13. | Suppression tests with 3-year-old dummy (Part 572, Subpart P) |
| ☐ | 14. | Suppression tests with 6-year-old dummy (Part 572, Subpart N) |
| ☒ | 15. | Test of reactivation of the passenger air bag system with an unbelted 5 th percentile female dummy |
| ☐ | 16. | Low risk deployment test with 12-month-old dummy (Part 572, Subpart R) |
| ☒ | 17. | Low risk deployment test with 3-year-old dummy (Part 572, Subpart P) |
| ☒ | 18. | Low risk deployment test with 6-year-old dummy (Part 572, Subpart N) |
| ☒ | 19. | Low risk deployment test with 5 th female dummy (Part 572, Subpart O) |
| ☒ | 20. | Impact Tests |
| ☐ | | Frontal Oblique |
| ☐ | | Belted 50 th male dummy driver and passenger (0 to 48 kmph) (S5.1.1(a)) |
| ☐ | | Unbelted 50 th male dummy driver and passenger (0 to 48 kmph) (S5.1.2(a)(1)) |
| ☐ | | Unbelted 50 th male dummy driver and passenger (32 to 40 kmph) (S5.1.2(a) (1) or S5.1.2(b)) |
| ☒ | | Frontal 0° |
| ☐ | | Belted 50 th male dummy driver (0 to 48 kmph) (S5.1.1.(b)(1) or S5.1.1(a)) |
| ☐ | | Belted 50 th male dummy passenger (0 to 48 kmph) (S5.1.1.(b)(1) or S5.1.1(a)) |
| ☐ | | Belted 5 th female dummy driver (0 to 48 kmph) (S16.1(a)) |
| ☐ | | Belted 5 th female dummy passenger (0 to 48 kmph) (S16.1(a)) |
| ☐ | | Belted 50 th male dummy driver and passenger (0 to 56 kmph) (S5.1.1.(b)(2)) |
| ☐ | | Unbelted 50 th male dummy driver and passenger (0 to 48 kmph) (S5.1.2(a) (1)) |
| ☐ | | Unbelted 50 th male dummy driver (32 to 40 kmph) (S5.1.2.(a)(2) or S5.1.2(b)) |
| ☐ | | Unbelted 50 th male dummy passenger (32 to 40 kmph) (S5.1.2.(a)(2) or S5.1.2(b)) |

	X	Unbelted 5 th female dummy driver (32 to 40 kmph) (S16.1(b))
	X	Unbelted 5 th female dummy passenger (32 to 40 kmph) (S16.1(b))
		40% Offset 0° Belted 5 th male dummy driver and passenger (0 to 40 kmph) (S18.1)
		21. Sled Test: unbelted 50 th male dummy driver and passenger (S13)
		22. FMVSS 204 Indicant Test
	X	23. FMVSS 212 Indicant Test
	X	24. FMVSS 219 Indicant Test
	X	25. FMVSS 301 Frontal Indicant Test

For the crash tests, the vehicle was instrumented with 8 accelerometers. The accelerometer data from the vehicle and dummies were sampled at 10,000 samples per second and processed as specified in SAE J211/1 MAR95 and FMVSS 208, S4.13.

The dynamic tests were recorded using high speed film and high speed digital video.

The vehicle appears to meet the performance requirements to which it was tested with the exception of S.4.5.1 Air Bag Labels.

SECTION 3

INJURY RESULT SUMMARY FOR FMVSS 208 TESTS

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance

NHTSA No.: C40303
 Test Dates: 1/29 & 2/12/04

5th Percentile Female Low Risk Deployments

5th Percentile Female SN 517 Position 1 (Chin On Module) 1-29-04

Injury Criteria	Max. Allowable Injury Assessment Values	Measured Value
HIC15	700	46
Peak Nij (Nte)	1.0	0.3
Time (ms)	NA	107.2
Peak Nij (Ntf)	1.0	0.5
Time (ms)	NA	28.0
Peak Nij (Nce)	1.0	0.5
Time (ms)	NA	140.6
Peak Nij (Ncf)	1.0	0.1
Time (ms)	NA	173.1
Neck Tension	2070 N	766
Neck Compression	2520 N	475
Chest g	60 g	21
Chest Displacement	52 mm	11
Left Femur	6805 N	321
Right Femur	6805 N	95

Second stage fire time of 130 ms; Injuries calculated on 0 ms to 255 ms

5th Percentile Female SN 517 Position 2 (Chin On Rim) 2-12-04

Injury Criteria	Max. Allowable Injury Assessment Values	Measured Value
HIC15	700	10
Peak Nij (Nte)	1.0	0.7
Time (ms)	NA	14.0
Peak Nij (Ntf)	1.0	0.1
Time (ms)	NA	58.6
Peak Nij (Nce)	1.0	0.0
Time (ms)	NA	6.6
Peak Nij (Ncf)	1.0	0.1
Time (ms)	NA	62.1
Neck Tension	2070 N	796
Neck Compression	2520 N	60
Chest g	60 g	22
Chest Displacement	52 mm	14
Left Femur	6805 N	85
Right Femur	6805 N	33

Second stage fire time of 130 ms; Injuries calculated on 0 ms to 255 ms

SECTION 3 ...(continued)

INJURY RESULT SUMMARY FOR FMVSS 208 TESTS

Test Vehicle: 2004 Dodge Durango
Test Program: FMVSS 208 Compliance

NHTSA No.: C40303
Test Dates: 1/29 & 2/12/04

3-Year-Old Low Risk Deployments

3-Year-Old SN 031 Position 1 (Chest On Instrument Panel) 1-29-04

Injury Criteria	Max. Allowable Injury Assessment Values	Measured Value
HIC15	570	17
Peak Nij (Nte)	1.0	0.5
Time (ms)	NA	42.1
Peak Nij (Ntf)	1.0	0.2
Time (ms)	NA	22.2
Peak Nij (Nce)	1.0	0.1
Time (ms)	NA	83.4
Peak Nij (Ncf)	1.0	0.1
Time (ms)	NA	18.0
Neck Tension	1130 N	426
Neck Compression	1380 N	124
Chest g	55 g	15
Chest Displacement	34 mm	10

Second stage fire time of 130 ms; Injuries calculated on 0 ms to 100 ms

3-Year-Old SN 031 Position 2 (Head On Instrument Panel) 2-12-04

Injury Criteria	Max. Allowable Injury Assessment Values	Measured Value
HIC15	570	81
Peak Nij (Nte)	1.0	0.5
Time (ms)	NA	78.6
Peak Nij (Ntf)	1.0	0.1
Time (ms)	NA	40.0
Peak Nij (Nce)	1.0	0.4
Time (ms)	NA	22.5
Peak Nij (Ncf)	1.0	0.4
Time (ms)	NA	25.5
Neck Tension	1130 N	335
Neck Compression	1380 N	771
Chest g	55 g	10
Chest Displacement	34 mm	1

Second stage fire time of 130 ms; Injuries calculated on 0 ms to 100 ms

SECTION 3 ...(continued)

INJURY RESULT SUMMARY FOR FMVSS 208 TESTS

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance

NHTSA No.: C40303
 Test Dates: 2/26/04

6-Year-Old Low Risk Deployments

6-Year-Old SN 153 Position 1 (Chest On Instrument Panel) 2-26-04

Injury Criteria	Max. Allowable Injury Assessment Values	Measured Value
HIC15	700	2
Peak Nij (Nte)	1.0	0.3
Time (ms)	NA	40.0
Peak Nij (Ntf)	1.0	0.1
Time (ms)	NA	22.0
Peak Nij (Nce)	1.0	0.0
Time (ms)	NA	13.3
Peak Nij (Ncf)	1.0	0.0
Time (ms)	NA	17.2
Neck Tension	1490 N	349
Neck Compression	1820 N	50
Chest g	60 g	11
Chest Displacement	40 mm	7

Second stage fire time of 130 ms; Injuries calculated on 0 ms to 100 ms

6-Year-Old SN 152 Position 2 (Head On Instrument Panel) 2-26-04

Injury Criteria	Max. Allowable Injury Assessment Values	Measured Value
HIC15	700	43
Peak Nij (Nte)	1.0	0.3
Time (ms)	NA	54.2
Peak Nij (Ntf)	1.0	0.0
Time (ms)	NA	11.3
Peak Nij (Nce)	1.0	0.4
Time (ms)	NA	25.7
Peak Nij (Ncf)	1.0	0.1
Time (ms)	NA	16.5
Neck Tension	1490 N	205
Neck Compression	1820 N	549
Chest g	60 g	8
Chest Displacement	40 mm	0.4

Second stage fire time of 130 ms; Injuries calculated on 0 ms to 100 ms

SECTION 3...(continued)

INJURY RESULT SUMMARY FOR FMVSS 208 TESTS

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance

NHTSA No.: C40303
 Test Date: 4/1/04

40 kmph Frontal Crash

Impact Angle: Zero degrees

Belted Dummies: X Yes (Rear Passenger) X No (Driver and Front Passenger)
 Speed Range: 0 to 40 kmph X 32 to 40 kmph
 0 to 48 kmph 0 to 56 kmph

Test Speed: 39.6 kmph Test Weight: 2451.7 kg

Driver Dummy: X 5th female 50th male
 Passenger Dummy: X 5th female 50th male
 Center Rear Passenger Dummy: 5th female X 50th male

5th Percentile Female in Frontal Crash Test Vehicles certified to S16.1(a), S16.1(b), or S18.1

Injury Criteria	Max. Allowable Injury Assessment Values	Driver	Passenger
HIC15	700	58	143
N _{te}	1.0	0.4	0.2
N _{tf}	1.0	0.3	0.2
N _{ce}	1.0	0.2	0.1
N _{cf}	1.0	0.1	0.3
Neck Tension	2620 N	1336	839
Neck Compression	2520 N	263	454
Chest g	60 g	47	37
Chest Displacement	52 mm	26	3
Left Femur	6805 N	4114	4560
Right Femur	6805 N	3636	4895

50th Percentile Male Center Rear Passenger in Frontal Crash Test

Injury Criteria	Center Rear Passenger
HIC15	241
N _{te}	0.4
N _{tf}	1.8
N _{ce}	0.0
N _{cf}	0.0
Neck Tension	2009
Neck Compression	78
Chest g	36
Chest Displacement	25
Left Femur	134
Right Femur	509

SECTION 4

DISCUSSION OF TESTS

Test Vehicle: 2004 Dodge Durango
Test Program: FMVSS 208 Compliance

NHTSA No.: C40303
Test Dates: 1/26-4/1/04

The vehicle did not meet the performance requirements of S.4.5.1 Air Bag Labels.

A blanket and visor were not used in the suppression testing because they did not affect the weight sensing system used on the vehicle.

Empty seat detection during Suppression testing was performed with the StarSCAN diagnostic tool.

The Cosco Dream Ride Car Bed would not fit at the forward and middle seat slide positions due to interference with the center console.

There were no 5th percentile Position 2 Low Risk Deployment high speed video views due to a camera software malfunction.

The 3-year-old Position 2 Low Risk Deployment front high speed video view had a double image due to a camera software malfunction.

The passenger air bag for the 6-year-old Position 2 Low Risk Deployment on 2-26-04 was replaced on site by MGA associates under the direction of NHTSA and DaimlerChrysler representatives.

The test vehicle fuel system was filled to 95.2% (97.3 liters, 25.7 gallons).

A 50th percentile dummy (S/N 401) was positioned as a Center Rear Passenger (CRP) during the 25 mph frontal crash test. The CRP seat back translated forward from its locked position during the event. The CRP headrest became detached. MHD sensors were attached to the CRP seat back to record angular rotation.

The CRP Neck My signal was clipped at 141 ms at a magnitude of 501.7 nm. This occurred for approximately 4 ms and was an over-range condition. It did not affect the Nij calculations.

The CRP shoulder belt provided No Valid Data after 100 ms.

There were no other unexpected events or items to discuss.

SECTION 5
TEST DATA SHEETS

Test Vehicle: 2004 Dodge Durango
Test Program: FMVSS 208 Compliance

NHTSA No.: C40303
Test Dates: 1/26-4/1/04

DATA SHEET 1

COTR VEHICLE WORK ORDER

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance

NHTSA No.: C40303
 Test Dates: 1/26-4/1/04

COTR Signature: Charles R. Case

Test to be performed for this vehicle are checked below:

☒	1. Rear Outboard Seating Position Seat Belts (S4.1.2(b)) & (S4.2.4)
☒	2. Air Bag Labels (S4.5.1)
☒	3. Readiness Indicator (S4.5.2)
☒	4. Passenger Air Bag Manual Cut-off Device (S4.5.4)
☒	5. Lap Belt Lockability (S7.1.1.5)
☒	6. Seat Belt Warning System (S7.3)
☒	7. Seat Belt Contact Force (S7.4.4)
☒	8. Seat Belt Latch Plate Access (S7.4.4)
☒	9. Seat Belt Retraction (S7.4.5)
☒	10. Seat Belt Guides and Hardware (S7.4.6)
☒	11. Suppression tests with 12-month-old CRABI dummy (Part 572, Subpart R) using the following indicated child restraints.

Section B

☒	Britax Handle with Care 191	☒	Full Rearward	☒	Mid Position	☒	Full Forward
	Century Assura 4553		Full Rearward		Mid Position		Full Forward
	Century Avanta SE 41530		Full Rearward		Mid Position		Full Forward
	Century Smart Fit 4543		Full Rearward		Mid Position		Full Forward
	Cosco Arriva 02727		Full Rearward		Mid Position		Full Forward
	Cosco Opus 35 02603		Full Rearward		Mid Position		Full Forward
	Evenflo Discovery Adjust Right 212		Full Rearward		Mid Position		Full Forward
☒	Evenflo First Choice 204	☒	Full Rearward	☒	Mid Position	☒	Full Forward
	Evenflo On My Way Position Right V 282		Full Rearward		Mid Position		Full Forward
☒	Graco Infant 8457	☒	Full Rearward	☒	Mid Position	☒	Full Forward

Section C

☒	Britax Roundabout 161	☒	Full Rearward	☒	Mid Position	☒	Full Forward
☒	Century Encore 4612	☒	Full Rearward	☒	Mid Position	☒	Full Forward
	Century STE 1000 4416		Full Rearward		Mid Position		Full Forward
	Cosco Olympian 02803		Full Rearward		Mid Position		Full Forward
	Cosco Touriva 02519		Full Rearward		Mid Position		Full Forward
	Evenflo Horizon V 425		Full Rearward		Mid Position		Full Forward
☒	Evenflo Medallion 254	☒	Full Rearward	☒	Mid Position	☒	Full Forward
☒	12. Suppression tests with newborn infant (Part 572, Subpart K) using the following indicated child restraints.						

Section A

☒	Cosco Dream Ride 02-719	☒	Full Rearward	☒	Mid Position	☒	Full Forward
	13. Suppression tests with 3-year-old dummy (Part 572, Subpart P) using the following indicated child restraints where a child restraint is required.						

Section C

	Britax Roundabout 161		Full Rearward		Mid Position		Full Forward
	Century Encore 4612		Full Rearward		Mid Position		Full Forward
	Century STE 1000 4416		Full Rearward		Mid Position		Full Forward
	Cosco Olympian 02803		Full Rearward		Mid Position		Full Forward
	Cosco Touriva 02519		Full Rearward		Mid Position		Full Forward
	Evenflo Horizon V 425		Full Rearward		Mid Position		Full Forward
	Evenflo Medallion 254		Full Rearward		Mid Position		Full Forward

Section D

	Britax Roadster 9004		Full Rearward		Mid Position		Full Forward
	Century Next Step 4920		Full Rearward		Mid Position		Full Forward
	Cosco High Back Booster 02-442		Full Rearward		Mid Position		Full Forward
	Evenflo Right Fit 245		Full Rearward		Mid Position		Full Forward

14. Suppression tests with representative 3-year-old child using the following indicated child restraints where a child restraint is required. (Appendix H, Data Sheet 16H and 17H)

Section C

	Britax Roundabout 161		Full Rearward		Mid Position		Full Forward
	Century Encore 4612		Full Rearward		Mid Position		Full Forward
	Century STE 1000 4416		Full Rearward		Mid Position		Full Forward
	Cosco Olympian 02803		Full Rearward		Mid Position		Full Forward
	Cosco Touriva 02519		Full Rearward		Mid Position		Full Forward
	Evenflo Horizon V 425		Full Rearward		Mid Position		Full Forward
	Evenflo Medallion 254		Full Rearward		Mid Position		Full Forward

Section D

	Britax Roadster 9004		Full Rearward		Mid Position		Full Forward
	Century Next Step 4920		Full Rearward		Mid Position		Full Forward
	Cosco High Back Booster 02-442		Full Rearward		Mid Position		Full Forward
	Evenflo Right Fit 245		Full Rearward		Mid Position		Full Forward

15. Suppression tests with 3-year-old dummy (Part 572, Subpart P) in the following positions

	Sitting on seat with back against seat back (S22.2.2.1)
	Sitting on seat with back against reclined seat back (S22.2.2.2)
	Sitting on seat with back not against seat back (S22.2.2.3)
	Sitting on seat edge, spine vertical, hands by the child's side (S22.2.2.4)
	Standing on seat, facing forward (S22.2.2.5)
	Kneeling on seat facing forward (S22.2.2.6)
	Kneeling on seat facing rearward (S22.2.2.7)
	Lying on seat (S22.2.2.8)

16. Suppression tests with representative 3-year-old child in the following positions

	Sitting on seat with back against seat back (S22.2.2.1)
	Sitting on seat with back against reclined seat back (S22.2.2.2)
	Sitting on seat with back not against seat back (S22.2.2.3)
	Sitting on seat edge, spine vertical, hands by the child's side (S22.2.2.4)
	Standing on seat, facing forward (S22.2.2.5)
	Kneeling on seat facing forward (S22.2.2.6)
	Kneeling on seat facing rearward (S22.2.2.7)
	Lying on seat (S22.2.2.8)

17. Suppression tests with 6-year-old dummy (Part 572, Subpart N) using the following indicated child restraints where a child restraint is required.

Section D

	Britax Roadster 9004		Full Rearward		Mid Position		Full Forward
	Century Next Step 4920		Full Rearward		Mid Position		Full Forward
	Cosco High Back Booster 02-442		Full Rearward		Mid Position		Full Forward
	Evenflo Right Fit 245		Full Rearward		Mid Position		Full Forward
18.	Suppression tests with representative 6-year-old child using the following indicated child restraints where a child restraint is required.						

Section D

	Britax Roadster 9004		Full Rearward		Mid Position		Full Forward
	Century Next Step 4920		Full Rearward		Mid Position		Full Forward
	Cosco High Back Booster 02-442		Full Rearward		Mid Position		Full Forward
	Evenflo Right Fit 245		Full Rearward		Mid Position		Full Forward
19.	Suppression tests with 6-year-old dummy (Part 572, Subpart N) in the following positions						
	Sitting on seat with back against seat back (S22.2.2.1)						
	Sitting on seat with back against reclined seat back (S22.2.2.2)						
	Sitting on seat edge, spine vertical, hands by the child's side (S22.2.2.4)						
	Sitting back in the seat and leaning on the right front passenger door (S24.2.3)						
20.	Suppression tests with representative 6-year-old child in the following positions						
	Sitting on seat with back against seat back (S22.2.2.1)						
	Sitting on seat with back against reclined seat back (S22.2.2.2)						
	Sitting on seat edge, spine vertical, hands by the child's side (S22.2.2.4)						
	Sitting back in the seat and leaning on the right front passenger door (S24.2.3)						
X 21.	Test of Reactivation of the Passenger Air Bag System with an Unbelted 5 th percentile female dummy (S20.3, 22.3, S24.3). Perform this test after the following suppression tests: After each restraint.						
22.	Test of Reactivation of the passenger air bag system with a representative 5 th percentile female (S20.3, 22.3, S24.3). Perform this test after the following suppression tests:						
23.	Low risk deployment test with 12-month-old dummy (Part 572, Subpart R) using the following indicated child restraints.						

Section B

	Britax Handle with Care 191		Full Rearward		Mid Position		Full Forward
	Century Assura 4553		Full Rearward		Mid Position		Full Forward
	Century Avanta SE 41530		Full Rearward		Mid Position		Full Forward
	Century Smart Fit 4543		Full Rearward		Mid Position		Full Forward
	Cosco Arriva 02727		Full Rearward		Mid Position		Full Forward
	Cosco Opus 35 02603		Full Rearward		Mid Position		Full Forward
	Evenflo Discovery Adjust Right 212		Full Rearward		Mid Position		Full Forward
	Evenflo First Choice 204		Full Rearward		Mid Position		Full Forward
	Evenflo On My Way Position Right V 282		Full Rearward		Mid Position		Full Forward
	Graco Infant 8457		Full Rearward		Mid Position		Full Forward

Section C

	Britax Roundabout 161		Full Rearward		Mid Position		Full Forward
	Century Encore 4612		Full Rearward		Mid Position		Full Forward
	Century STE 1000 4416		Full Rearward		Mid Position		Full Forward
	Cosco Olympian 02803		Full Rearward		Mid Position		Full Forward
	Cosco Touriva 02519		Full Rearward		Mid Position		Full Forward
	Evenflo Horizon V 425		Full Rearward		Mid Position		Full Forward
	Evenflo Medallion 254		Full Rearward		Mid Position		Full Forward

- X** 24. Low risk deployment test with 3-year-old dummy (Part 572, Subpart P) in the following positions
- X** Position 1
- X** Position 2
- X** 25. Low risk deployment test with 6-year-old dummy (Part 572, Subpart N) in the following positions
- X** Position 1
- X** Position 2
- X** 26. Low risk deployment test with 5th percentile female dummy (Part 572, Subpart O) in the following positions
- X** Position 1
- X** Position 2
- X** 27. Impact Tests
- X** Frontal Oblique – Test Speed:
- X** Belted 50th male dummy driver and passenger (0 to 48 kmph) (S5.1.1(a))
- X** Unbelted 50th male dummy driver and passenger (0 to 48 kmph) (S5.1.2(a)(1))
- X** Unbelted 50th male dummy driver and passenger (32 to 40 kmph) (S5.1.2(a) (1) or S5.1.2(b))
- X** Frontal 0° - Test Speed: 39.6 kmph
- X** Belted 50th male dummy driver (0 to 48 kmph) (S5.1.1.(b)(1) or S5.1.1(a))
- X** Belted 50th male dummy passenger (0 to 48 kmph) (S5.1.1.(b)(1) or S5.1.1(a))
- X** Belted 5th female dummy driver (0 to 48 kmph) (S16.1(a))
- X** Belted 5th female dummy passenger (0 to 48 kmph) (S16.1(a))
- X** Belted 50th male dummy driver and passenger (0 to 56 kmph) (S5.1.1.(b)(2))
- X** Unbelted 50th male dummy driver and passenger (0 to 48 kmph) (S5.1.2(a) (1))
- X** Unbelted 50th male dummy driver (32 to 40 kmph) (S5.1.2.(a)(2) or S5.1.2(b))
- X** Unbelted 50th male dummy passenger (32 to 40 kmph) (S5.1.2.(a)(2) or S5.1.2(b))
- X** Unbelted 5th female dummy driver (32 to 40 kmph) (S16.1(b))
- X** Unbelted 5th female dummy passenger (32 to 40 kmph) (S16.1(b))
- X** 40% Offset 0° Belted 5th male dummy driver and passenger (0 to 40 kmph) (S18.1) – Test Speed:
- X** 28. Sled Test: Unbelted 50th male dummy driver and passenger (S13)
- X** 29. FMVSS 204 Indicant Test
- X** 30. FMVSS 212 Indicant Test
- X** 31. FMVSS 219 Indicant Test
- X** 32. FMVSS 301 Frontal Indicant Test

DATA SHEET 2
REPORT OF VEHICLE CONDITION

Test Vehicle: 2004 Dodge Durango
Test Program: FMVSS 208 Compliance

NHTSA No.: C40303
Test Date: 1/26-4/1/04

CONTRACT NO. DTNH22- 03-D-11002

Date: 3/12/04

FROM (Lab and rep name): MGA Research Corporation

TO: NHTSA, OVSC (NVS-220)

PURPOSE: () Initial Receipt () Received via Transfer (X) Present vehicle condition

MODEL YEAR/MAKE/MODEL/BODY STYLE: 2004 DODGE DURANGO MPV

MANUFACTURE DATE: 10/03

NHTSA NO. C40303

GVWR: 2994 kg (6600 lbs)

BODY COLOR: BLACK

GAWR (Fr): 1407 kg (3100 lbs)

VIN: 1D4HD48N04F114309

GAWR (Rr): 1770 kg (3900 lbs)

ODOMETER READINGS: ARRIVAL (miles): 94

DATE: 12/29/03

COMPLETION (miles): 111

DATE: 4/1/04

PURCHASE PRICE: (\$) 27,405.00

DEALER'S NAME: Hub West Dodge Chrysler, 2838 E Main St. East Troy, WI 53120

- A. All options listed on window sticker are present on the test vehicle:
X Yes No
- B. Tires and wheel rims are new and the same as listed: X Yes No
- C. There are no dents or other interior or exterior flaws: X Yes No
- D. The vehicle has been properly prepared and is in running condition:
X Yes No
- E. Keyless remote is available and working: Yes X No
- F. The glove box contains an owner's manual, warranty document, consumer information, and extra set of keys: X Yes No
- G. Proper fuel filler cap is supplied on the test vehicle: X Yes No
- H. Using permanent marker, identify vehicle with NHTSA number and FMVSS test type(s) on roof line above driver door or for school buses, place a placard with NHTSA number inside the windshield and to the exterior front and rear side of bus:
X Yes No
- I. Place vehicle in storage area: X Yes No
- J. Inspect the vehicle's interior and exterior, including all windows, seats, doors, etc. to confirm that each system is complete and functional per the manufacturer's specifications. Any damage, misadjustment, or other unusual condition that could influence the test program or test results shall be recorded. Report any abnormal condition to the NHTSA COTR before beginning any test:
X Vehicle OK Conditions reported below

REPORT OF VEHICLE CONDITION AT THE COMPLETION OF TESTING

LIST OF FMVSS TESTS PERFORMED BY THIS LAB: FMVSS 208, 212, 219, 301

VEHICLE: 2004 DODGE DURANGO MPV NHTSA NO. C40303

REMARKS:

Equipment that is no longer on the test vehicle as noted on previous page:

LH rear window glass, RH rear tail light, hub covers, and third row seats.

Explanation for equipment removal:

Components removed for instrumentation installation and to meet target weight.

Test Vehicle Condition:

25 mph frontal impact damage- front suspension & structure damaged, hood & front quarter panels damaged, radiator damaged, air bags & pretensioners deployed, Stoddard in fuel system

RECORDED BY: Jeff Lewandowski DATE: 4/8/2004

APPROVED BY: David Winkelbauer DATE: 4/8/2004

#####

RELEASE OF TEST VEHICLE

The vehicle described above is released from MGA to be delivered to:

Date: Time: Odometer:

Lab Rep's Signature:

Title:

Carrier/Customer Rep:

Date:

DATA SHEET 3**CERTIFICATION LABEL AND TIRE PLACARD INFORMATION**

Test Vehicle: 2004 Dodge Durango
Test Program: FMVSS 208 Compliance
Test Technician: Clark Subrt

NHTSA No.: C40303
Test Date: 4/1/04

Certification Label	
Manufacturer:	DaimlerChrysler Corp.
Date of Manufacture:	10/03
VIN:	1D4HD48N04F114309
Vehicle Certified As (Pass. Car/MPV/Truck/Bus):	MPV
Front Axle GVWR:	2994 kg (6600 lbs)
Rear Axle GVWR:	1407 kg (3100 lbs)
Total GVWR:	1770 kg (3900 lbs)

Tire Placard	
Not applicable, vehicle is not a passenger car and does not have a tire placard.	YES (MPV)
This is not a passenger car, but all or part of this information is still contained on a vehicle label and is reported here. (From Owner's Manual)	YES (MPV)
Vehicle Capacity Weight:	767 kg (1692 lbs)
Designated Seating Capacity Front:	2
Designated Seating Capacity Rear:	3
Designated Seating Capacity Third Row:	2
Total Designated Seating Capacity:	7
Recommended Cold Tire Inflation Pressure Front:	227 kpa (33 psi)
Recommended Cold Tire Inflation Pressure Rear:	227 kpa (33 psi)
Recommended Tire Size:	P245/70R17

Signature: 

Date: 3/29/04

DATA SHEET 4

REAR OUTBOARD SEATING POSITION SEAT BELTS

Test Vehicle: 2004 Dodge Durango
Test Program: FMVSS 208 Compliance
Test Technician: Wayne Dahlke

NHTSA No.: C40303
Test Date: 1/28/04

	Yes	No
Do all rear outboard seating positions have Type 2 seat belts?	X	

If NO, describe the seat belt installed, the seat location, and any other information about the seat that would explain why a Type 2 seat belt was not installed.

REMARKS: NONE

Signature: Wayne Dahlke

Date: 1/28/04

DATA SHEET 5

AIR BAG LABELS (S4.5.1)

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Wayne Dahlke

NHTSA No.: C40303
 Test Date: 1/28/04

- ☒ 1. Air bag maintenance label and owner's manual instructions: (S4.5.1(a))
- ☒ 1.1 Does the manufacturer recommend periodic maintenance or replacement of the air bag?
- ☐ Yes, go to 1.2
- ☒ No – go to 2
- ☐ 1.2 Does the vehicle have a label specifying air bag maintenance or replacement?
- ☐ Yes – Pass
- ☐ No – Fail
- ☐ 1.3 Does the label contain one of the following?
- ☐ Yes – Pass
- ☐ No – Fail
- Check applicable schedule:
- ___ Schedule on label specifies month and year (Record date_____)
- ___ Schedule on label specified vehicle mileage (Record mileage_____)
- ___ Schedule on label specifies interval measured from date on certification label (Record interval_____)
- ☐ 1.4 Is the label permanently affixed within the passenger compartment such that it cannot be removed without destroying or defacing the label or the sunvisor?
- ☐ Yes – Pass
- ☐ No – Fail
- ☐ 1.5 Is the label lettered in English?
- ☐ Yes – Pass
- ☐ No – Fail
- ☐ 1.6 Is the label in block capitals and numerals?
- ☐ Yes – Pass
- ☐ No – Fail
- ☐ 1.7 Are the letters and numerals at least 3/32 inches high?
- ☐ Yes – Pass
- ☐ No – Fail
- ☐ 1.8 Does the owner's manual set forth the recommended schedule for maintenance or replacement?
- ☒ 2. Does the owner's manual: (S4.5.1(f))
- ☒ 2.1 Include a description of the vehicle's air bag system in an easily understandable format?
- ☒ Yes – Pass
- ☐ No – Fail
- ☒ 2.2 Include a statement that the vehicle is equipped with an air bag and a lap/shoulder belt at the front outboard seating position?
- ☒ Yes – Pass

- ☒ 2.3 ☐ No – Fail
Include a statement that the air bag is a supplement restraint at the front outboard seating position?
☒ Yes – Pass
☐ No – Fail
- ☒ 2.4 Emphasize that all occupants, including the driver, should always wear their seat belts whether or not an air bag is also provided at their seating positions to minimize the risk of severe injury or death in the event of a crash?
☒ Yes – Pass
☐ No – Fail
- ☒ 2.5 Provide any necessary precautions regarding the proper positioning of occupants, including children, at seating positions equipped with air bags to ensure maximum safety protection for those occupants?
☒ Yes – Pass
☐ No – Fail
- ☒ 2.6 Explain that no objects should be placed over or near the air bag on the steering wheel or on the instrument panel, because any such objects could cause harm if the vehicle is in a crash severe enough to cause the air bag to inflate?
☒ Yes – Pass
☐ No – Fail
- ☒ 2.7 Is the vehicle certified to meet the requirements of S14.5, S15, S17, S19, S21, S23, and S25? (Obtain answer from COTR) (S4.5.1(f)(2))
☒ Yes – (Go to 2.7.1)
☐ No – (Go to 3.)
- ☒ 2.7.1 Explain the proper functioning of the advanced air bag system? (S4.5.1(f)(2))
☒ Yes – Pass
☐ No – Fail
- ☒ 2.7.2 Provide a summary of the actions that may affect the proper functioning of the system? (S4.5.1(f)(2))
☒ Yes – Pass
☐ No – Fail
- ☒ 2.7.3 Present and explain the main components of the advanced passenger air bag system? (S4.5.1(f)(2)(i))
☒ Yes – Pass
☐ No – Fail
- ☒ 2.7.4 Explain how the components function together as part of the advanced passenger air bag system? (S4.5.1(f)(2)(ii))
☒ Yes – Pass
☐ No – Fail
- ☒ 2.7.5 Contain the basic requirements for proper operation, including an explanation of the actions that may affect the proper functioning of the system? (S4.5.1(f)(2)(iii))
☒ Yes – Pass
☐ No – Fail
- ☒ 2.7.6 Is the vehicle certified to the requirements of S19.2, S21.2, or 23.2 (automatic suppression)?
☒ Yes, continue with 2.7.6
☐ No, go to 2.7.7

- ☒ 2.7.6.1 Contain a complete description of the passenger air bag suppression system installed in the vehicle, including a discussion of any suppression zone? (S4.5.1(f)(2)(iv))
- ☒ Yes – Pass
☐ No – Fail
- ☒ 2.7.6.2 Discuss the telltale light, specifying its location in the vehicle and explaining when the light is illuminated?
- ☒ Yes – Pass
☐ No – Fail
- ☒ 2.7.7 Explain the interaction of the advanced passenger air bag system with other vehicle components, such as seat belts, seats or other components? (S4.5.1(f)(2)(v))
- ☒ Yes – Pass
☐ No – Fail
- ☒ 2.7.8 Summarize the expected outcomes when child restraint systems, children and small teenagers or adults are both properly and improperly positioned in the passenger seat, including cautionary advice against improper placement of child restraint systems? (S4.5.1(f)(2)(vi))
- ☒ Yes – Pass
☐ No – Fail
- ☒ 2.7.9 Provide information on how to contact the vehicle manufacturer concerning modifications for persons with disabilities that may affect the advanced air bag system? (S4.5.1(f)(2)(vii))
- ☒ Yes – Pass
☐ No – Fail
- ☒ 3. Sun Visor Air Bag Warning Label (S4.5.1(b)) Check only one of the following:
- ☐ The vehicle is not certified to meet the requirements of S19, S21, and S23 (Obtain answer from COTR) (S4.5.1(b)(1)) Go to 3.1 and skip 3.2 and 3.3
- ☐ The vehicle is certified to meet the requirements of S19, S21, and S23 before 9/1/03. (Obtain answer from COTR) (S4.5.1(b)(2)) Go to 3.2 and skip 3.1 and 3.3
- ☒ The vehicle is certified to meet the requirements of S19, S21, and S23 on 9/1/03 or later. (Obtain answer from COTR) (S4.5.1(b)(3)) Go to 3.3 and skip 3.1 and 3.2
- ☐ 3.1 Vehicles not certified to meet the requirements of S19, S21, and S23.
- ☐ 3.1.1 Is the label permanently affixed (including permanent marking on the visor material or molding into the visor material) to either side of the sun visor at each front outboard seating position such that it cannot be removed without destroying or defacing it? (S4.5.1(b)(1))
- ☐ Driver Side, Yes – Pass
☐ Driver Side, No – Fail
☐ Passenger Side, Yes – Pass
☐ Passenger Side, No – Fail
- ☐ 3.1.2 Does the label conform in content to the label shown in either Figure 6A or 6B (Figure 6b is for vehicles with passenger air bag on-off switches), as appropriate, at each front outboard seating position? (S4.5.1(b)(1)) (Vehicles without back seats may omit the statement: "The back seat is the safest place for children." (S4.5.1(b)(1)(iv))



Figure 6a. Sun Visor Label Visible When Visor is in Down Position.



Figure 6b. Sun Visor Label Visible When Visor is in Down Position.

- 3.1.3 ☐ Driver Side, Yes – Pass
☐ Driver Side, No – Fail
☐ Passenger Side, Yes – Pass
☐ Passenger Side, No – Fail
- ☐ 3.1.3 Is the label heading area yellow with the word “WARNING” and the alert symbol in black? (S4.5.1(b)(1)(i))
- ☐ Driver Side, Yes – Pass
☐ Driver Side, No – Fail
☐ Passenger Side, Yes – Pass
☐ Passenger Side, No – Fail
- ☐ 3.14 Is the message area white with black text? (S4.5.1(b)(1)(ii))
- ☐ Driver Side, Yes – Pass
☐ Driver Side, No – Fail
☐ Passenger Side, Yes – Pass
☐ Passenger Side, No – Fail
- ☐ 3.15 Is the message area at least 30 cm²? (S4.5.1(b)(1)(ii))
- Driver Side: Length_____, Width_____
- Passenger Side: Length_____, Width_____
- Actual message area _____ cm²
- ☐ Driver Side, Yes – Pass
☐ Driver Side, No – Fail

- 3.16 Is the pictogram black with a red circle and slash on a white background? (S4.5.1(b)(2)(iii))
- 3.17 Is the pictogram at least 30 mm in diameter? (S4.5.1(b)(2)(iii))
Actual diameter _____ mm
- 3.2 Vehicles certified to meet the requirements of S19, S21, and S23 before 9/1/03.
- 3.2.1 Is the label permanently affixed (including permanent marking on the visor material or molding into the visor material) to either side of the sun visor at each front outboard seating position such that it cannot be removed without destroying or defacing the label or the sun visor? (S4.5.1(b)(2))
- 3.2.2 Does the label conform in content to the label shown in either Figure 8 or 11 at each front outboard seating position? (S4.5.1(b)(2)) (Vehicles without back seats may omit the statement: "The back seat is the safest place for children." (S4.5.1(b)(2)(iv)) Vehicles without back seats or the back seat is too small to accommodate a rear-facing child restraint may omit the statement "Never put a rear-facing child seat in the front." (S4.5.1(b)(2)(v))

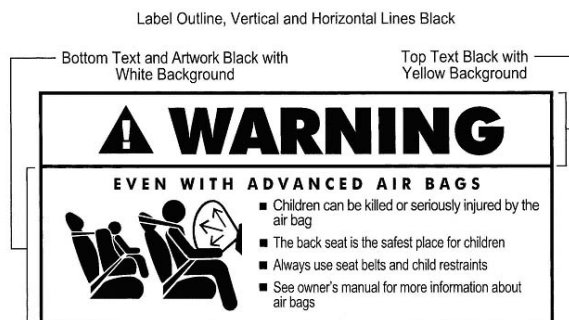


Figure 8. Sun Visor Label Visible when Visor is in Down Position.



Figure 11. Sun Visor Label Visible when Visor is in Down Position.

- ☐ Driver Side, Yes – Pass
- ☐ Driver Side, No – Fail
- ☐ Passenger Side, Yes – Pass
- ☐ Passenger Side, No – Fail
- ☐ 3.2.3 Is the label heading area yellow with the word “WARNING” and the alert symbol in black? (S4.5.1(b)(2)(i))
- ☐ Driver Side, Yes – Pass
- ☐ Driver Side, No – Fail
- ☐ Passenger Side, Yes – Pass
- ☐ Passenger Side, No – Fail
- ☐ 3.2.4 Is the message area white with black text? (S4.5.1(b)(2)(ii))
- ☐ Driver Side, Yes – Pass
- ☐ Driver Side, No – Fail
- ☐ Passenger Side, Yes – Pass
- ☐ Passenger Side, No – Fail
- ☐ 3.2.5 Is the message area at least 30 cm²? (S4.5.1(b)(2)(ii))
- Driver Side: Length_____, Width_____
- Passenger Side: Length_____, Width_____
- Actual message area _____ cm²
- ☐ Driver Side, Yes – Pass
- ☐ Driver Side, No – Fail
- ☐ Passenger Side, Yes – Pass
- ☐ Passenger Side, No – Fail
- ☐ 3.2.6 Is the pictogram black on a white background? (S4.5.1(b)(2)(iii))
- ☐ Driver Side, Yes – Pass
- ☐ Driver Side, No – Fail
- ☐ Passenger Side, Yes – Pass
- ☐ Passenger Side, No – Fail
- ☐ 3.2.7 Is the pictogram at least 30 mm (1.2 inches) in length? (S4.5.1(b)(2)(iii))
- Driver Side: Length_____
- Passenger Side: Length_____
- ☐ Driver Side, Yes – Pass
- ☐ Driver Side, No – Fail

- | | | |
|-------------------------------------|-------------------------------------|---|
| | ☐ | Passenger Side, Yes – Pass |
| | ☐ | Passenger Side, No – Fail |
| ☒ | 3.3 | Vehicles certified to meet the requirements of S19, S21, and S23 on 9/1/03 and later. (S4.5.1(b)(3)) |
| ☒ | 3.3.1 | Is the label permanently affixed (including permanent marking on the visor material or molding into the visor material) to either side of the sun visor at each front outboard seating position such that it cannot be removed without destroying or defacing the label or the sun visor? (S4.5.1(b)(3)) |
| | ☒ | Driver Side, Yes – Pass |
| | ☐ | Driver Side, No – Fail |
| | ☒ | Passenger Side, Yes – Pass |
| | ☐ | Passenger Side, No – Fail |
| ☒ | 3.3.2 | Does the label conform in content to the label shown in either Figure 11 at each front outboard seating position? (S4.5.1(b)(2)) (Vehicles without back seats may omit the statement: "The back seat is the safest place for children." (S4.5.1(b)(3)(iv)) Vehicles without back seats or the back seat is too small to accommodate a rear-facing child restraint may omit the statement "Never put a rear-facing child seat in the front." (S4.5.1(b)(3)(v)) |

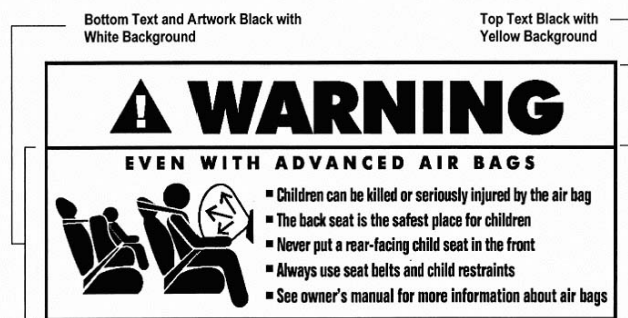


Figure 11. Sun Visor Label Visible when Visor is in Down Position.

- | | | |
|-------------------------------------|-------------------------------------|---|
| | ☒ | Driver Side, Yes – Pass |
| | ☐ | Driver Side, No – Fail |
| | ☒ | Passenger Side, Yes – Pass |
| | ☐ | Passenger Side, No – Fail |
| ☒ | 3.3.3 | Is the label heading area yellow with the word "WARNING" and the alert symbol in black? (S4.5.1(b)(3)(i)) |
| | ☒ | Driver Side, Yes – Pass |
| | ☐ | Driver Side, No – Fail |
| | ☒ | Passenger Side, Yes – Pass |
| | ☐ | Passenger Side, No – Fail |
| ☒ | 3.3.4 | Is the message area white with black text? (S4.5.1(b)(3)(ii)) |
| | ☒ | Driver Side, Yes – Pass |
| | ☐ | Driver Side, No – Fail |
| | ☒ | Passenger Side, Yes – Pass |
| | ☐ | Passenger Side, No – Fail |

X	3.3.5 Is the message area at least 30 cm²? (S4.5.1(b)(3)(ii)) Driver Side: Length <u>8.7 cm</u> , Width <u>4.8 cm</u> Passenger Side: Length <u>8.7 cm</u> , Width <u>4.8 cm</u> Driver Actual message area <u>41.76 cm²</u> Passenger Actual message area <u>41.76 cm²</u> <table border="0"> <tr><td style="background-color: yellow; border: 1px solid black; padding: 2px 5px;">X</td><td>Driver Side, Yes – Pass</td></tr> <tr><td style="background-color: yellow; border: 1px solid black; padding: 2px 5px;"></td><td>Driver Side, No – Fail</td></tr> <tr><td style="background-color: yellow; border: 1px solid black; padding: 2px 5px;">X</td><td>Passenger Side, Yes – Pass</td></tr> <tr><td style="background-color: yellow; border: 1px solid black; padding: 2px 5px;"></td><td>Passenger Side, No – Fail</td></tr> </table>	X	Driver Side, Yes – Pass		Driver Side, No – Fail	X	Passenger Side, Yes – Pass		Passenger Side, No – Fail
X	Driver Side, Yes – Pass								
	Driver Side, No – Fail								
X	Passenger Side, Yes – Pass								
	Passenger Side, No – Fail								
X	3.3.6 Is the pictogram black on a white background? (S4.5.1(b)(3)(iii)) <table border="0"> <tr><td style="background-color: yellow; border: 1px solid black; padding: 2px 5px;">X</td><td>Driver Side, Yes – Pass</td></tr> <tr><td style="background-color: yellow; border: 1px solid black; padding: 2px 5px;"></td><td>Driver Side, No – Fail</td></tr> <tr><td style="background-color: yellow; border: 1px solid black; padding: 2px 5px;">X</td><td>Passenger Side, Yes – Pass</td></tr> <tr><td style="background-color: yellow; border: 1px solid black; padding: 2px 5px;"></td><td>Passenger Side, No – Fail</td></tr> </table>	X	Driver Side, Yes – Pass		Driver Side, No – Fail	X	Passenger Side, Yes – Pass		Passenger Side, No – Fail
X	Driver Side, Yes – Pass								
	Driver Side, No – Fail								
X	Passenger Side, Yes – Pass								
	Passenger Side, No – Fail								
	3.3.7 Is the pictogram at least 30 mm (1.2 inches) in length? (S4.5.1(b)(3)(iii)) Driver Side: Length <u>45 mm</u> Passenger Side: Length <u>45 mm</u> <table border="0"> <tr><td style="background-color: yellow; border: 1px solid black; padding: 2px 5px;">X</td><td>Driver Side, Yes – Pass</td></tr> <tr><td style="background-color: yellow; border: 1px solid black; padding: 2px 5px;"></td><td>Driver Side, No – Fail</td></tr> <tr><td style="background-color: yellow; border: 1px solid black; padding: 2px 5px;">X</td><td>Passenger Side, Yes – Pass</td></tr> <tr><td style="background-color: yellow; border: 1px solid black; padding: 2px 5px;"></td><td>Passenger Side, No – Fail</td></tr> </table>	X	Driver Side, Yes – Pass		Driver Side, No – Fail	X	Passenger Side, Yes – Pass		Passenger Side, No – Fail
X	Driver Side, Yes – Pass								
	Driver Side, No – Fail								
X	Passenger Side, Yes – Pass								
	Passenger Side, No – Fail								
X	3.4 Is the same side of the sun visor that contains the air bag warning label free of other information with the exception of the air bag maintenance label and/or the rollover-warning label? (S4.5.1(b)(5)(i)) <table border="0"> <tr><td style="background-color: yellow; border: 1px solid black; padding: 2px 5px;">X</td><td>Driver Side, Yes – Pass</td></tr> <tr><td style="background-color: yellow; border: 1px solid black; padding: 2px 5px;"></td><td>Driver Side, No – Fail</td></tr> <tr><td style="background-color: yellow; border: 1px solid black; padding: 2px 5px;">X</td><td>Passenger Side, Yes – Pass</td></tr> <tr><td style="background-color: yellow; border: 1px solid black; padding: 2px 5px;"></td><td>Passenger Side, No – Fail</td></tr> </table>	X	Driver Side, Yes – Pass		Driver Side, No – Fail	X	Passenger Side, Yes – Pass		Passenger Side, No – Fail
X	Driver Side, Yes – Pass								
	Driver Side, No – Fail								
X	Passenger Side, Yes – Pass								
	Passenger Side, No – Fail								
X	3.5 Is the sun visor free of other information about air bags or the need to wear seat belts with the exception of the air bag alert label and/or the rollover-warning label? (S4.5.1(b)(5)(ii)) <table border="0"> <tr><td style="background-color: yellow; border: 1px solid black; padding: 2px 5px;">X</td><td>Driver Side, Yes – Pass</td></tr> <tr><td style="background-color: yellow; border: 1px solid black; padding: 2px 5px;"></td><td>Driver Side, No – Fail</td></tr> <tr><td style="background-color: yellow; border: 1px solid black; padding: 2px 5px;">X</td><td>Passenger Side, Yes – Pass</td></tr> <tr><td style="background-color: yellow; border: 1px solid black; padding: 2px 5px;"></td><td>Passenger Side, No – Fail</td></tr> </table>	X	Driver Side, Yes – Pass		Driver Side, No – Fail	X	Passenger Side, Yes – Pass		Passenger Side, No – Fail
X	Driver Side, Yes – Pass								
	Driver Side, No – Fail								
X	Passenger Side, Yes – Pass								
	Passenger Side, No – Fail								
X	3.6 Does the driver side visor contain a rollover-warning label on the same side of the visor as the air bag warning label? <u> X </u> Yes, go to 3.6.1 <u> </u> No, go to 4 (skipping 3.6.1 through 3.6 3)								

- ☒ 3.6.1 Are both the rollover-warning label and the air bag warning label surrounded by a continuous solid-lined border?
 ___ Yes, go to 3.6.2 and skip 3.6.3
X No, go to 3.6.3 and skip 3.6.2
- ☐ 3.6.2 Is the shortest distance from the border of the rollover label to the border of the air bag warning label at least 1 cm? (575.105 (d)(1)(iv)(B))
 _____ actual distance
- ☒ 3.6.3 Is the shortest distance from any of the lettering or graphics on the rollover-warning label to any of the lettering or graphics of the air bag warning label at least 3 cm? (575.105 (d)(1)(iv)(A))
17mm (1.7cm) actual distance
 ___ Yes-Pass X **No-FAIL**
- ☒ 4. Air Bag Alert Label (S4.5.1(c) (A "Rollover Warning Label" or "Rollover Alert Label" may be on the same side of the driver's sun visor as the "Air Bag Alert Label." 575.105(d))
- ☒ 4.1 Is the sun visor warning label visible when the sun visor is in the stowed position?
☒ If yes for driver and passenger, go to 5.
☒ Driver Side, Yes – Pass
☐ Driver Side, No – Fail
☒ Passenger Side, Yes – Pass
☐ Passenger Side, No – Fail
- ☐ 4.2 Is the air bag alert label permanently affixed (including permanent marking on the visor material or molding into the visor material) to the sun visor at each front outboard seating position such that it cannot be removed without destroying or defacing the label or the sun visor? (S4.5.1(c))
☐ Driver Side, Yes – Pass
☐ Driver Side, No – Fail
☐ Passenger Side, Yes – Pass
☐ Passenger Side, No – Fail
- ☐ 4.3 Is the air bag alert label visible when the visor is in the stowed position? (S4.5.1(c))
☐ Driver Side, Yes – Pass
☐ Driver Side, No – Fail
☐ Passenger Side, Yes – Pass
☐ Passenger Side, No – Fail
- ☐ 4.4 Does the label conform in content to the label shown in Figure 6C? (S4.5.1(c))

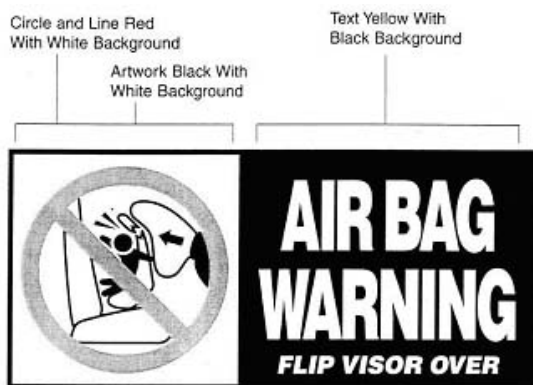


Figure 6c. Sun Visor Label Visible When Visor is in Up Position.

- | | | |
|--------------------------|--------------------------|--|
| | ☐ | Driver Side, Yes – Pass |
| | ☐ | Driver Side, No – Fail |
| | ☐ | Passenger Side, Yes – Pass |
| | ☐ | Passenger Side, No – Fail |
| ☐ | 4.5 | Is the message area black with yellow text? (S4.5.1(c)(1)) |
| | ☐ | Driver Side, Yes – Pass |
| | ☐ | Driver Side, No – Fail |
| | ☐ | Passenger Side, Yes – Pass |
| | ☐ | Passenger Side, No – Fail |
| ☐ | 4.6 | Is the message area at least 20 cm ² ? (S4.5.1(c)(1)) |
| | | Driver Side: Length _____, Width _____ |
| | | Passenger Side: Length _____, Width _____ |
| | | Actual message area _____ cm ² |
| | ☐ | Driver Side, Yes – Pass |
| | ☐ | Driver Side, No – Fail |
| | ☐ | Passenger Side, Yes – Pass |
| | ☐ | Passenger Side, No – Fail |
| ☐ | 4.7 | Is the pictogram black with a red circle and slash on a white background? (S4.5.1(c)(2)) |
| | ☐ | Driver Side, Yes – Pass |
| | ☐ | Driver Side, No – Fail |
| | ☐ | Passenger Side, Yes – Pass |
| | ☐ | Passenger Side, No – Fail |
| ☐ | 4.8 | Is the pictogram at least 20 mm in diameter? (S4.5.1(c)(2)) |
| | | Driver Side Diameter _____ mm |
| | | Passenger Side Diameter _____ mm |
| | ☐ | Driver Side, Yes – Pass |
| | ☐ | Driver Side, No – Fail |
| | ☐ | Passenger Side, Yes – Pass |
| | ☐ | Passenger Side, No – Fail |

- X** 5. Label on the Dashboard
- X** 5.1 Is the vehicle certified to meet the requirements of S19, S21, and S23? (Obtain answer from COTR) (S4.5.1(3)(2))
- X** Yes, go to 5.1.1 and **skip 5.2**
- No, go to 5.2, skipping 5.1.1 through 5.1.6
- Driver Side, Yes – Pass
- Driver Side, No – Fail
- Passenger Side, Yes – Pass
- Passenger Side, No – Fail
- X** 5.1.1 Does the vehicle have a label on the dash or steering wheel hub? (S4.5.1(e)(2))
- X** Yes – Pass
- No - Fail
- X** 5.1.2 Is the label clearly visible from all front seating positions? (S4.5.1(e)(2))
- X** Yes – Pass
- No - Fail
- X** 5.1.3 Does the label conform in content to the label shown in Figure 9? (S4.5.1(e)(2))
Vehicles without back seats may omit the statement: "The back seat is the safest place for children." (S4.5.1(e)(2)(iii))



Figure 9. Removable Label on Dash.

- X** Yes – Pass
- No - Fail
- X** 5.1.4 Is the heading area yellow with black text? (S4.5.1(e)(2)(i))
- X** Yes – Pass
- No - Fail
- X** 5.1.5 Is the message white with black text? (S4.5.1(e)(2)(ii))
- X** Yes – Pass
- No - Fail
- X** 5.1.6 Is the message area at least 30 cm²? (S4.5.1(e)(2)(ii))
Length 8.7 cm , Width 3.5 cm
Actual message area 30.45 cm²

- ☒ Yes – Pass
☐ No - Fail
- ☐ 5.2 Does the vehicle have a label on the dash or steering wheel hub? (S4.5.1(e)(1))
- ☐ Yes – Pass
☐ No - Fail
- ☐ 5.2.1 Is the label clearly visible from all front seating positions? (S4.5.1(e)(1))
- ☐ Yes – Pass
☐ No - Fail
- ☐ 5.2.2 Does the label conform in content to the label shown in Figure 7? (S4.5.1(e)(1)(iii))
 Vehicles without back seats may omit the statement: "The back seat is the safest place for children." (S4.5.1(e)(2)(iii))

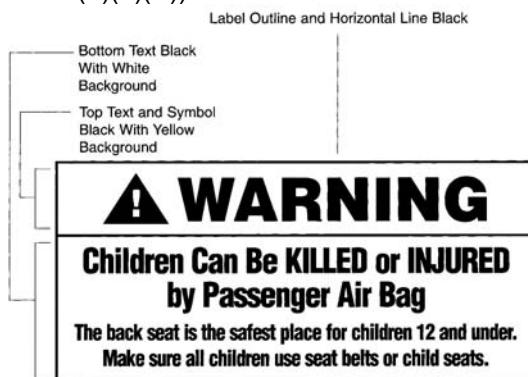


Figure 7. Removable Label on Dash.

- ☐ Yes – Pass
☐ No - Fail
- ☐ 5.2.3 Is the heading area yellow with the word "WARNING" and the alert symbol in black? (S4.5.1(e)(1)(i))
- ☐ Yes – Pass
☐ No - Fail
- ☐ 5.2.4 Is the message white with black text? (S4.5.1(e)(1)(ii))
- ☐ Yes – Pass
☐ No - Fail
- ☐ 5.2.5 Is the message area at least 30 cm²? (S4.5.1(e)(1)(ii))
 Length_____, Width_____
 Actual message area _____ cm²
- ☐ Yes – Pass
☐ No - Fail

I certify that I have read and performed each instruction.

Signature: Wayne Zahler

Date: 1/28/04

DATA SHEET 6

FMVSS 208 READINESS INDICATOR (S4.5.2)

Test Vehicle: 2004 Dodge Durango
Test Program: FMVSS 208 Compliance
Test Technician: Wayne Dahlke

NHTSA No.: C40303
Test Date: 1/28/04

An occupant restraint system that deploys in the event of a crash shall have a monitoring system with a readiness indicator. A totally mechanical system is exempt from this requirement. (11/8/94 legal interpretation to Lawrence F. Hennegerger on behalf of Breed)

- ☒ 1. Is the system totally mechanical? If Yes, this data sheet is complete.
☐ Yes
☒ No
- ☒ 2. Describe the location of the readiness indicator: Left side of instrument cluster
- ☒ 3. Is the readiness indicator clearly visible to the driver?
☒ Yes – Pass
☐ No - Fail
- ☒ 4. Is a list of the elements in the occupant restraint system, being monitored by the readiness indicator, provided on a label or in the owner's manual?
☒ Yes – Pass
☐ No - Fail
- ☒ 5. Does the vehicle have an on-off switch for the passenger air bag?
☐ If Yes, go to 6
☒ If No, this form is complete.
- ☐ 6. Is the air bag readiness indicator off when the passenger air bag switch is in the off position?
☐ Yes – Pass
☐ No - Fail

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Dahlke

Date: 1/28/04

DATA SHEET 7

PASSENGER AIR BAG MANUAL CUT-OFF DEVICE (S4.5.4)

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Wayne Dahlke

NHTSA No.: C40303
 Test Date: 1/28/04

- | | | |
|-------------------------------------|-----|--|
| ☒ | 1. | Is the vehicle equipped with an on-off switch that deactivates the air bag installed at the right front outboard seating position? |
| | | ☐ Yes, go to 2 |
| | | ☒ No, this sheet is complete |
| ☐ | 2. | Does the vehicle have any forward-facing rear designated seating positions? (S4.5.4(a)) |
| | | ☐ Yes, go to 3 |
| | | ☐ No, go to 4 |
| ☐ | 3. | Verification of the lack of room for a child restraint in the rear seat behind the driver's seat. (S4.5.4(b)) |
| ☐ | 3.1 | Position the seat's adjustable lumbar supports to that the lumbar support is in its lowest, retracted or deflated adjustment position (S8.1.3) |
| | | ☐ N/A, no lumbar adjustment |
| ☐ | 3.2 | Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.02) |
| | | ☐ N/A, no additional support adjustment |
| ☐ | 3.3 | If the seat cushion adjusts fore and aft, independent of the seat back, set this adjustment to the full rearward position. (S16.2.10.3.1) |
| | | ☐ N/A, no independent fore-aft seat cushion adjustment |
| ☐ | 3.4 | If the seat cushion height adjusts independent of the seat back, set this adjustment to the full down position (S16.2.10.3.1) |
| | | ☐ N/A, no independent seat cushion height adjustment |
| ☐ | 3.5 | Put the seat in its full rearward position. (S16.2.10.3.1) |
| | | ☐ N/A, the seat does not have a fore-aft adjustment |
| ☐ | 3.6 | If the seat height is adjustable, put it in the full down position. (S16.2.10.3.1) |
| | | ☐ N/A, no seat height adjustment |
| ☐ | 3.7 | Draw a horizontal reference line on the side of the seat cushion. |
| ☐ | 3.8 | Using only the controls that change the seat in the fore-aft direction, mark the fore-aft seat positions. Mark the side of the seat and a reference position directly below on a part of the vehicle that does not adjust. For manual seats, move the seat forward one detent at a time and mark each detent as was done for the full rearward position. For power seats, mark only the full rearward, middle, and full forward positions. Label three of the positions with the following: F for full forward, M for mid-position (if there is no mid position, label the closest adjustment position to the rear of the mid-point), and R for full rearward. |
| | | ☐ N/A – the seat does not have a fore-aft adjustment. |
| ☐ | 3.9 | Using only the controls that change the seat in the fore-aft direction, place the seat in the full rearward position and then place the seat in the middle fore-aft position. (S8.1.2) |
| | | ☐ N/A – the seat does not have fore-aft adjustment. |

		Mid position
		If there is no mid position, put the seat in the closest adjustment position to the rear of the midpoint. Describe the location of the seat:
	3.10	If seat adjustments, other than fore-aft, are present and the horizontal reference line is no longer horizontal, use those adjustments to maintain the reference line as closely as possible to the horizontal.
		N/A – No adjustments
		Angle of reference line as tested:
	3.11	The seat back angle, if adjustable, is set at the manufacturer's nominal design riding position for a 50th percentile adult male in the manner specified by the manufacturer. (S4.5.4.1 (b) and S8.1.3)
		N/A – No seat back angle adjustment
		Manufacturers design seat back angle:
		Tested seat back angle:
	3.12	Is the driver seat a bucket seat?
		Yes, go to 3.12.1 and skip 3.12.2
		No, go to 3.12.2 and skip 3.12.1
	3.12.1	Bucket Seats:
	3.12.1.1	Locate and mark a vertical Plane B through the longitudinal centerline of the seat driver's seat cushion. (S22.2.1.3) The longitudinal centerline of a bucket seat cushion is determined at the widest part of the seat cushion. Measure perpendicular to the longitudinal centerline of the vehicle.
		Record the width of the seat:
		Record the distance from the edge of the seat to Plane B:
	3.12.1.2	Locate the longitudinal horizontal line in plane B that is tangent to the highest point of the rear seat cushion behind the driver's seat. Measure along this line from the front of the seat back of the rear seat to the rear of the seat back of the driver's seat.
		Distance (mm):
		Less than 720 mm – Pass
		More then 720 mm – Fail
		Go to 4
	3.12.2	Bench seats (including split bench seats):
	3.12.2.1	Locate and mark a vertical Plane B through the center of the steering wheel parallel to the vehicle longitudinal centerline.
	3.12.2.2	Locate the longitudinal horizontal line in plane B that is tangent to the highest point of the rear seat cushion. Measure along this line from the front of the seat back of the rear seat to the rear of the seat back of the front seat.
		Distance (mm):
		Less than 720 mm – Pass
		More then 720 mm – Fail
		Go to 4
	4.	Does the device turn the air bag on and off using the vehicle's ignition key? (S4.5.4.2)
		Yes – Pass

		☐ No – Fail
☐	5.	Is the on-off device separate from the ignition switch? (S4.5.4.2)
		☐ Yes – Pass
		☐ No – Fail
☐	6.	Is there a telltale light that comes on when the passenger air bag is turned off? (S4.5.4.2)
		☐ Yes – Pass
		☐ No – Fail
☐	7.	Telltale light (S4.5.4.3)
☐	7.1	Is the light yellow? S4.5.4.3(a))
		☐ Yes – Pass
		☐ No – Fail
☐	7.2	Are the words “PASSENGER AIR BAG OFF” (S4.5.4.3(b))
☐	7.2.1	on the telltale?
		☐ Yes – Pass, go to 7.3
		☐ No – go to 7.2.2
☐	7.2.2	within 25 mm of the telltale?
☐		Measurement from the edge of the telltale light (mm):
		☐ Yes – Pass
		☐ No – Fail
☐	7.3	Does the telltale remain illuminated while the air bag is turned off? (S4.5.4.3c)) (Leave the air bag off for 5 minutes.)
		☐ Yes – Pass
		☐ No – Fail
☐	7.4	Is the telltale illuminated while the air bag is turned on? (S4.5.4.3(d))
		☐ Yes – Fail
		☐ No – Pass
☐	7.5	Is the telltale combined with the air bag readiness indicator? (S4.5.4.3(e))
		☐ Yes – Fail
		☐ No – Pass
☐	8.	Owner’s Manual
☐	8.1	Does the owner’s manual contain complete instructions on the operation of the on-off switch? (S4.5.4.4(a))
		☐ Yes – Pass
		☐ No – Fail
☐	8.2	Does the owner’s manual contain a statement that the on-off switch should only be used when a member of one of the following risk groups is occupying the right front passenger seating position? (S4.5.4.4(b))
	Infants:	there is no back seat the rear seat is too small to accommodate a child restraint there is a medical condition that must be monitored constantly
	Children aged 1 to 12:	there is no back seat space is not always available in the rear seat there is a medical condition that must be monitored constantly
	Medical condition:	medical risk causes special risk for passenger greater risk for harm than with the air bag on

☐	☐	Yes – Pass
	☐	No – Fail
☐	8.3	Does the owner's manual contain a warning about the safety consequences of using the on-off switch at other times?
	☐	Yes – Pass
	☐	No – Fail

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Zuhl

Date: 1/28/04

DATA SHEET 8

LAP BELT LOCKABILITY

**Passenger cars, trucks, buses, and multipurpose passenger
Vehicles with a GVWR of 10,000 pounds or less. (S7.1.1.5)**

Test Vehicle: 2004 Dodge Durango
Test Program: FMVSS 208 Compliance
Test Technician: Wayne Dahlke

NHTSA No.: C40303
Test Date: 1/28/04

Complete one of these forms for **each** designated seating position that can be adjusted to forward-facing or that is a forward-facing seat, other than the driver's seat (S7.1.1.5(a), **and** that has seat belt retractors that are not solely automatic locking retractors. (S7.1.1.5(c))

DESIGNATED SEATING POSITION:	Front Passenger
------------------------------	-----------------

☐		N/A – no retractor is at this position	
☐		N/A – the retractor is an automatic locking retractor ONLY	
☒	1.	Record test fore-aft seat position: Full Aft (S7.1.1.5(c)(1)) (Any position is acceptable)	
☒	2.	Does the lap belt portion of the seat belt in the forward-facing seat or seat that can be adjusted to forward-facing consist of a locking device that does NOT have to be attached by the vehicle user to the seat belt webbing, retractor, or any other part of the vehicle. (S7.1.1.5 (a))	
		☒ Yes – Pass	
		☐ No – Fail	
☒	3.	Does the lap belt portion of the seat belt in the forward-facing seat or seat that can be adjusted to forward-facing consist of a locking device that does NOT require inverting, twisting or deforming of the belt webbing. (S7.1.1.5 (a))	
		☒ Yes – Pass	
		☐ No – Fail	
☒	4.	Buckle the seat belt. (S7.1.1.5(c)(1))	
☒	5.	Locate a reference point A on the seat belt buckle. (S7.1.1.5(c)(2))	
☒	6.	Locate a reference point B on the attachment hardware or retractor assembly at the other end of the lap belt or lap belt portion of the seat belt assembly. (S7.1.1.5(c)(2))	
☒	7.	Does the vehicle user need to take some action to activate the locking feature on the lap belt portion of the seat belt in any forward-facing seat or seat that can be adjusted to forward-facing?	
		☒ Yes, go to 7.1	
		☐ No, go to 8	
☒	7.1	Does the vehicle owner's manual include a description in words and/or diagrams describing how to activate the locking feature so that the seat belt assembly can tightly secure a child restraint system and how to deactivate the locking feature to remove the child restraint system. (S7.1.1.5(b))	
		☒ Yes – Pass	
		☐ No – Fail	
☒	8.	Adjust the lap belt or lap belt portion of the seat belt assembly according to any procedures recommended in the vehicle owner's manual to activate any locking feature so that the webbing between points A and B is at the maximum length allowed by the belt system. (S7.1.1.5(c)(2) & S7.1.1.5(c)(1))	

- ☒ 9. Measure and record the distance between points A and B along the longitudinal centerline of the webbing for the lap belt or lap belt portion of the seat belt assembly. (S7.1.1.5(c)(2))
- ☒ Measured distance between A and B (inches): 56 1/4
- ☒ 10. Readjust the belt system so that the webbing between points A and B is at any length that is 5 inches or more shorter than the maximum length of the webbing. (S7.1.1.5(c)(3))
- ☒ 11. To the lap belt or lap belt portion of the seat belt assembly, apply a preload of 10 pounds using the webbing tension pull device in Figure 5. Apply the load in a vertical plane parallel to the longitudinal axis of the vehicle and passing through the seating reference point of the designated seating position. Apply the preload in a horizontal direction toward the front of the vehicle with a force application angle of not less than 5 degrees nor more than 15 degrees above the horizontal. (S7.1.1.5(c)(4))
- ☒ Measured force application angle (Spec. 5-15 degrees): 10.5
- ☒ 12. Measure the length between points A and B along the longitudinal centerline of the webbing while the preload is being applied. (S7.1.1.5(c)(4))
- ☒ Measured distance between A and B (inches): 25 1/8
- ☒ 13. Increase the load to 50 pounds at a rate of no more than 50 pounds per second. Attain the load in not more than 5 seconds. (If webbing sensitive emergency locking retractors are installed as part of the lap belt or lap belt portion of the seat belt assembly, apply the load at a rate less than the threshold value for lock-up specified by the manufacturer.) Maintain the load for at least 5 seconds. Measure and record the distance between points A and B along the longitudinal centerline of the webbing. (S7.1.1.5(c)(5))
- ☒ Record onset rate (lb/sec) (spec. 10 to 50 lb/sec) (S7.1.1.5(c)(5)): 40
- ☒ Measured distance between A and B (inches) (S7.1.1.5(c)(6)): 25 3/8
- ☒ 14. Subtract the measurement in 13 from the measurement in 12. Is the difference 2 inches or less? (S7.1.1.5(c)(7))
- ☒ 13 - 12 = 1/4
- ☒ Yes – Pass
- ☐ No – Fail
- ☒ 15. Subtract the measurement in 9 from the measurement in 13. Is the difference 3 inches or more? (S7.1.1.5(c)(8))
- ☒ 9 - 13 = 30 7/8
- ☒ Yes – Pass
- ☐ No – Fail

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Gahl

Date: 1/28/04

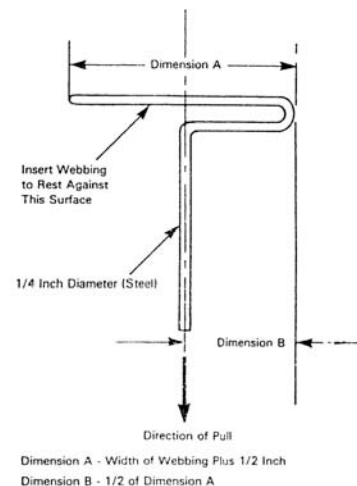


Figure 5. - Webbing Tension Pull Device

DATA SHEET 8

LAP BELT LOCKABILITY

**Passenger cars, trucks, buses, and multipurpose passenger
Vehicles with a GVWR of 10,000 pounds or less. (S7.1.1.5)**

Test Vehicle: 2004 Dodge Durango
Test Program: FMVSS 208 Compliance
Test Technician: Wayne Dahlke

NHTSA No.: C40303
Test Date: 1/28/04

Complete one of these forms for **each** designated seating position that can be adjusted to forward-facing or that is a forward-facing seat, other than the driver's seat (S7.1.1.5(a), **and** that has seat belt retractors that are not solely automatic locking retractors. (S7.1.1.5(c))

DESIGNATED SEATING POSITION:	Left Rear Passenger
------------------------------	---------------------

☐		N/A – no retractor is at this position	
☐		N/A – the retractor is an automatic locking retractor ONLY	
☒	1.	Record test fore-aft seat position: Not Adjustable (S7.1.1.5(c)(1)) (Any position is acceptable)	
☒	2.	Does the lap belt portion of the seat belt in the forward-facing seat or seat that can be adjusted to forward-facing consist of a locking device that does NOT have to be attached by the vehicle user to the seat belt webbing, retractor, or any other part of the vehicle. (S7.1.1.5 (a))	
		☒ Yes – Pass	
		☐ No – Fail	
☒	3.	Does the lap belt portion of the seat belt in the forward-facing seat or seat that can be adjusted to forward-facing consist of a locking device that does NOT require inverting, twisting or deforming of the belt webbing. (S7.1.1.5 (a))	
		☒ Yes – Pass	
		☐ No – Fail	
☒	4.	Buckle the seat belt. (S7.1.1.5(c)(1))	
☒	5.	Locate a reference point A on the seat belt buckle. (S7.1.1.5(c)(2))	
☒	6.	Locate a reference point B on the attachment hardware or retractor assembly at the other end of the lap belt or lap belt portion of the seat belt assembly. (S7.1.1.5(c)(2))	
☒	7.	Does the vehicle user need to take some action to activate the locking feature on the lap belt portion of the seat belt in any forward-facing seat or seat that can be adjusted to forward-facing?	
		☒ Yes, go to 7.1	
		☐ No, go to 8	
☒	7.1	Does the vehicle owner's manual include a description in words and/or diagrams describing how to activate the locking feature so that the seat belt assembly can tightly secure a child restraint system and how to deactivate the locking feature to remove the child restraint system. (S7.1.1.5(b))	
		☒ Yes – Pass	
		☐ No – Fail	
☒	8.	Adjust the lap belt or lap belt portion of the seat belt assembly according to any procedures recommended in the vehicle owner's manual to activate any locking feature so that the webbing between points A and B is at the maximum length allowed by the belt system. (S7.1.1.5(c)(2) & S7.1.1.5(c)(1))	

- ☒ 9. Measure and record the distance between points A and B along the longitudinal centerline of the webbing for the lap belt or lap belt portion of the seat belt assembly. (S7.1.1.5(c)(2))
- ☒ Measured distance between A and B (inches): 65 1/4
- ☒ 10. Readjust the belt system so that the webbing between points A and B is at any length that is 5 inches or more shorter than the maximum length of the webbing. (S7.1.1.5(c)(3))
- ☒ 11. To the lap belt or lap belt portion of the seat belt assembly, apply a preload of 10 pounds using the webbing tension pull device in Figure 5. Apply the load in a vertical plane parallel to the longitudinal axis of the vehicle and passing through the seating reference point of the designated seating position. Apply the preload in a horizontal direction toward the front of the vehicle with a force application angle of not less than 5 degrees nor more than 15 degrees above the horizontal. (S7.1.1.5(c)(4))
- ☒ Measured force application angle (Spec. 5-15 degrees): 10.9
- ☒ 12. Measure the length between points A and B along the longitudinal centerline of the webbing while the preload is being applied. (S7.1.1.5(c)(4))
- ☒ Measured distance between A and B (inches): 43 1/2
- ☒ 13. Increase the load to 50 pounds at a rate of no more than 50 pounds per second. Attain the load in not more than 5 seconds. (If webbing sensitive emergency locking retractors are installed as part of the lap belt or lap belt portion of the seat belt assembly, apply the load at a rate less than the threshold value for lock-up specified by the manufacturer.) Maintain the load for at least 5 seconds. Measure and record the distance between points A and B along the longitudinal centerline of the webbing. (S7.1.1.5(c)(5))
- ☒ Record onset rate (lb/sec) (spec. 10 to 50 lb/sec) (S7.1.1.5(c)(5)): 40
- ☒ Measured distance between A and B (inches) (S7.1.1.5(c)(6)): 44
- ☒ 14. Subtract the measurement in 13 from the measurement in 12. Is the difference 2 inches or less? (S7.1.1.5(c)(7))
- ☒ 13 - 12 = 1/2
- ☒ Yes – Pass
- ☐ No – Fail
- ☒ 15. Subtract the measurement in 9 from the measurement in 13. Is the difference 3 inches or more? (S7.1.1.5(c)(8))
- ☒ 9 - 13 = 21 1/4
- ☒ Yes – Pass
- ☐ No – Fail

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Zuhl

Date: 1/28/04

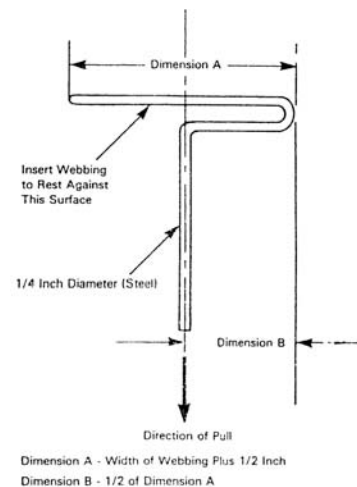


Figure 5. - Webbing Tension Pull Device

DATA SHEET 8

LAP BELT LOCKABILITY

**Passenger cars, trucks, buses, and multipurpose passenger
Vehicles with a GVWR of 10,000 pounds or less. (S7.1.1.5)**

Test Vehicle: 2004 Dodge Durango
Test Program: FMVSS 208 Compliance
Test Technician: Wayne Dahlke

NHTSA No.: C40303
Test Date: 1/28/04

Complete one of these forms for **each** designated seating position that can be adjusted to forward-facing or that is a forward-facing seat, other than the driver's seat (S7.1.1.5(a), **and** that has seat belt retractors that are not solely automatic locking retractors. (S7.1.1.5(c))

DESIGNATED SEATING POSITION:	Center Rear Passenger
------------------------------	------------------------------

☐		N/A – no retractor is at this position
☐		N/A – the retractor is an automatic locking retractor ONLY
☒	1.	Record test fore-aft seat position: Not Adjustable (S7.1.1.5(c)(1)) (Any position is acceptable)
☒	2.	Does the lap belt portion of the seat belt in the forward-facing seat or seat that can be adjusted to forward-facing consist of a locking device that does NOT have to be attached by the vehicle user to the seat belt webbing, retractor, or any other part of the vehicle. (S7.1.1.5 (a))
		☒ Yes – Pass
		☐ No – Fail
☒	3.	Does the lap belt portion of the seat belt in the forward-facing seat or seat that can be adjusted to forward-facing consist of a locking device that does NOT require inverting, twisting or deforming of the belt webbing. (S7.1.1.5 (a))
		☒ Yes – Pass
		☐ No – Fail
☒	4.	Buckle the seat belt. (S7.1.1.5(c)(1))
☒	5.	Locate a reference point A on the seat belt buckle. (S7.1.1.5(c)(2))
☒	6.	Locate a reference point B on the attachment hardware or retractor assembly at the other end of the lap belt or lap belt portion of the seat belt assembly. (S7.1.1.5(c)(2))
☒	7.	Does the vehicle user need to take some action to activate the locking feature on the lap belt portion of the seat belt in any forward-facing seat or seat that can be adjusted to forward-facing?
		☒ Yes, go to 7.1
		☐ No, go to 8
☒	7.1	Does the vehicle owner's manual include a description in words and/or diagrams describing how to activate the locking feature so that the seat belt assembly can tightly secure a child restraint system and how to deactivate the locking feature to remove the child restraint system. (S7.1.1.5(b))
		☒ Yes – Pass
		☐ No – Fail
☒	8.	Adjust the lap belt or lap belt portion of the seat belt assembly according to any procedures recommended in the vehicle owner's manual to activate any locking feature so that the webbing between points A and B is at the maximum length allowed by the belt system. (S7.1.1.5(c)(2) & S7.1.1.5(c)(1))

- ☒ 9. Measure and record the distance between points A and B along the longitudinal centerline of the webbing for the lap belt or lap belt portion of the seat belt assembly. (S7.1.1.5(c)(2))
- ☒ Measured distance between A and B (inches): 63 3/4
- ☒ 10. Readjust the belt system so that the webbing between points A and B is at any length that is 5 inches or more shorter than the maximum length of the webbing. (S7.1.1.5(c)(3))
- ☒ 11. To the lap belt or lap belt portion of the seat belt assembly, apply a preload of 10 pounds using the webbing tension pull device in Figure 5. Apply the load in a vertical plane parallel to the longitudinal axis of the vehicle and passing through the seating reference point of the designated seating position. Apply the preload in a horizontal direction toward the front of the vehicle with a force application angle of not less than 5 degrees nor more than 15 degrees above the horizontal. (S7.1.1.5(c)(4))
- ☒ Measured force application angle (Spec. 5-15 degrees): 11
- ☒ 12. Measure the length between points A and B along the longitudinal centerline of the webbing while the preload is being applied. (S7.1.1.5(c)(4))
- ☒ Measured distance between A and B (inches): 26
- ☒ 13. Increase the load to 50 pounds at a rate of no more than 50 pounds per second. Attain the load in not more than 5 seconds. (If webbing sensitive emergency locking retractors are installed as part of the lap belt or lap belt portion of the seat belt assembly, apply the load at a rate less than the threshold value for lock-up specified by the manufacturer.) Maintain the load for at least 5 seconds. Measure and record the distance between points A and B along the longitudinal centerline of the webbing. (S7.1.1.5(c)(5))
- ☒ Record onset rate (lb/sec) (spec. 10 to 50 lb/sec) (S7.1.1.5(c)(5)): 40
- ☒ Measured distance between A and B (inches) (S7.1.1.5(c)(6)): 26
- ☒ 14. Subtract the measurement in 13 from the measurement in 12. Is the difference 2 inches or less? (S7.1.1.5(c)(7))
- ☒ 13 - 12 = Zero
- ☒ Yes – Pass
- ☐ No – Fail
- ☒ 15. Subtract the measurement in 9 from the measurement in 13. Is the difference 3 inches or more? (S7.1.1.5(c)(8))
- ☒ 9 - 13 = 37 3/4
- ☒ Yes – Pass
- ☐ No – Fail

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Zuhl

Date: 1/28/04

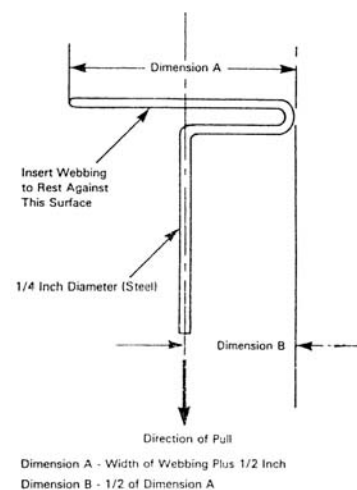


Figure 5. - Webbing Tension Pull Device

DATA SHEET 8

LAP BELT LOCKABILITY

**Passenger cars, trucks, buses, and multipurpose passenger
Vehicles with a GVWR of 10,000 pounds or less. (S7.1.1.5)**

Test Vehicle: 2004 Dodge Durango
Test Program: FMVSS 208 Compliance
Test Technician: Wayne Dahlke

NHTSA No.: C40303
Test Date: 1/28/04

Complete one of these forms for **each** designated seating position that can be adjusted to forward-facing or that is a forward-facing seat, other than the driver's seat (S7.1.1.5(a), **and** that has seat belt retractors that are not solely automatic locking retractors. (S7.1.1.5(c))

DESIGNATED SEATING POSITION:	Right Rear Passenger
------------------------------	-----------------------------

☐		N/A – no retractor is at this position
☐		N/A – the retractor is an automatic locking retractor ONLY
☒	1.	Record test fore-aft seat position: Not Adjustable (S7.1.1.5(c)(1)) (Any position is acceptable)
☒	2.	Does the lap belt portion of the seat belt in the forward-facing seat or seat that can be adjusted to forward-facing consist of a locking device that does NOT have to be attached by the vehicle user to the seat belt webbing, retractor, or any other part of the vehicle. (S7.1.1.5 (a))
		☒ Yes – Pass
		☐ No – Fail
☒	3.	Does the lap belt portion of the seat belt in the forward-facing seat or seat that can be adjusted to forward-facing consist of a locking device that does NOT require inverting, twisting or deforming of the belt webbing. (S7.1.1.5 (a))
		☒ Yes – Pass
		☐ No – Fail
☒	4.	Buckle the seat belt. (S7.1.1.5(c)(1))
☒	5.	Locate a reference point A on the seat belt buckle. (S7.1.1.5(c)(2))
☒	6.	Locate a reference point B on the attachment hardware or retractor assembly at the other end of the lap belt or lap belt portion of the seat belt assembly. (S7.1.1.5(c)(2))
☒	7.	Does the vehicle user need to take some action to activate the locking feature on the lap belt portion of the seat belt in any forward-facing seat or seat that can be adjusted to forward-facing?
		☒ Yes, go to 7.1
		☐ No, go to 8
☒	7.1	Does the vehicle owner's manual include a description in words and/or diagrams describing how to activate the locking feature so that the seat belt assembly can tightly secure a child restraint system and how to deactivate the locking feature to remove the child restraint system. (S7.1.1.5(b))
		☒ Yes – Pass
		☐ No – Fail
☒	8.	Adjust the lap belt or lap belt portion of the seat belt assembly according to any procedures recommended in the vehicle owner's manual to activate any locking feature so that the webbing between points A and B is at the maximum length allowed by the belt system. (S7.1.1.5(c)(2) & S7.1.1.5(c)(1))

- ☒ 9. Measure and record the distance between points A and B along the longitudinal centerline of the webbing for the lap belt or lap belt portion of the seat belt assembly. (S7.1.1.5(c)(2))
- ☒ Measured distance between A and B (inches): 66
- ☒ 10. Readjust the belt system so that the webbing between points A and B is at any length that is 5 inches or more shorter than the maximum length of the webbing. (S7.1.1.5(c)(3))
- ☒ 11. To the lap belt or lap belt portion of the seat belt assembly, apply a preload of 10 pounds using the webbing tension pull device in Figure 5. Apply the load in a vertical plane parallel to the longitudinal axis of the vehicle and passing through the seating reference point of the designated seating position. Apply the preload in a horizontal direction toward the front of the vehicle with a force application angle of not less than 5 degrees nor more than 15 degrees above the horizontal. (S7.1.1.5(c)(4))
- ☒ Measured force application angle (Spec. 5-15 degrees): 11.3
- ☒ 12. Measure the length between points A and B along the longitudinal centerline of the webbing while the preload is being applied. (S7.1.1.5(c)(4))
- ☒ Measured distance between A and B (inches): 37
- ☒ 13. Increase the load to 50 pounds at a rate of no more than 50 pounds per second. Attain the load in not more than 5 seconds. (If webbing sensitive emergency locking retractors are installed as part of the lap belt or lap belt portion of the seat belt assembly, apply the load at a rate less than the threshold value for lock-up specified by the manufacturer.) Maintain the load for at least 5 seconds. Measure and record the distance between points A and B along the longitudinal centerline of the webbing. (S7.1.1.5(c)(5))
- ☒ Record onset rate (lb/sec) (spec. 10 to 50 lb/sec) (S7.1.1.5(c)(5)): 40
- ☒ Measured distance between A and B (inches) (S7.1.1.5(c)(6)): 37 3/4
- ☒ 14. Subtract the measurement in 13 from the measurement in 12. Is the difference 2 inches or less? (S7.1.1.5(c)(7))
- ☒ $13 - 12 = 3/4$
- ☒ Yes – Pass
- ☐ No – Fail
- ☒ 15. Subtract the measurement in 9 from the measurement in 13. Is the difference 3 inches or more? (S7.1.1.5(c)(8))
- ☒ $9 - 13 = 28 1/4$
- ☒ Yes – Pass
- ☐ No – Fail

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Zuhl

Date: 1/28/04

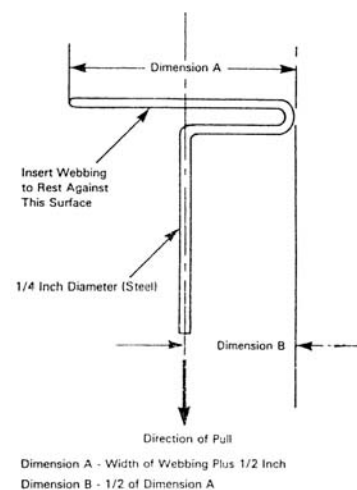


Figure 5. - Webbing Tension Pull Device

DATA SHEET 8

LAP BELT LOCKABILITY

**Passenger cars, trucks, buses, and multipurpose passenger
Vehicles with a GVWR of 10,000 pounds or less. (S7.1.1.5)**

Test Vehicle: 2004 Dodge Durango
Test Program: FMVSS 208 Compliance
Test Technician: Wayne Dahlke

NHTSA No.: C40303
Test Date: 1/28/04

Complete one of these forms for **each** designated seating position that can be adjusted to forward-facing or that is a forward-facing seat, other than the driver's seat (S7.1.1.5(a), **and** that has seat belt retractors that are not solely automatic locking retractors. (S7.1.1.5(c))

DESIGNATED SEATING POSITION:	Left Third Row Passenger
------------------------------	--------------------------

☐		N/A – no retractor is at this position	
☐		N/A – the retractor is an automatic locking retractor ONLY	
☒	1.	Record test fore-aft seat position: Not Adjustable (S7.1.1.5(c)(1)) (Any position is acceptable)	
☒	2.	Does the lap belt portion of the seat belt in the forward-facing seat or seat that can be adjusted to forward-facing consist of a locking device that does NOT have to be attached by the vehicle user to the seat belt webbing, retractor, or any other part of the vehicle. (S7.1.1.5 (a))	
		☒ Yes – Pass	
		☐ No – Fail	
☒	3.	Does the lap belt portion of the seat belt in the forward-facing seat or seat that can be adjusted to forward-facing consist of a locking device that does NOT require inverting, twisting or deforming of the belt webbing. (S7.1.1.5 (a))	
		☒ Yes – Pass	
		☐ No – Fail	
☒	4.	Buckle the seat belt. (S7.1.1.5(c)(1))	
☒	5.	Locate a reference point A on the seat belt buckle. (S7.1.1.5(c)(2))	
☒	6.	Locate a reference point B on the attachment hardware or retractor assembly at the other end of the lap belt or lap belt portion of the seat belt assembly. (S7.1.1.5(c)(2))	
☒	7.	Does the vehicle user need to take some action to activate the locking feature on the lap belt portion of the seat belt in any forward-facing seat or seat that can be adjusted to forward-facing?	
		☒ Yes, go to 7.1	
		☐ No, go to 8	
☒	7.1	Does the vehicle owner's manual include a description in words and/or diagrams describing how to activate the locking feature so that the seat belt assembly can tightly secure a child restraint system and how to deactivate the locking feature to remove the child restraint system. (S7.1.1.5(b))	
		☒ Yes – Pass	
		☐ No – Fail	
☒	8.	Adjust the lap belt or lap belt portion of the seat belt assembly according to any procedures recommended in the vehicle owner's manual to activate any locking feature so that the webbing between points A and B is at the maximum length allowed by the belt system. (S7.1.1.5(c)(2) & S7.1.1.5(c)(1))	

- ☒ 9. Measure and record the distance between points A and B along the longitudinal centerline of the webbing for the lap belt or lap belt portion of the seat belt assembly. (S7.1.1.5(c)(2))
- ☒ Measured distance between A and B (inches): 59
- ☒ 10. Readjust the belt system so that the webbing between points A and B is at any length that is 5 inches or more shorter than the maximum length of the webbing. (S7.1.1.5(c)(3))
- ☒ 11. To the lap belt or lap belt portion of the seat belt assembly, apply a preload of 10 pounds using the webbing tension pull device in Figure 5. Apply the load in a vertical plane parallel to the longitudinal axis of the vehicle and passing through the seating reference point of the designated seating position. Apply the preload in a horizontal direction toward the front of the vehicle with a force application angle of not less than 5 degrees nor more than 15 degrees above the horizontal. (S7.1.1.5(c)(4))
- ☒ Measured force application angle (Spec. 5-15 degrees): 8
- ☒ 12. Measure the length between points A and B along the longitudinal centerline of the webbing while the preload is being applied. (S7.1.1.5(c)(4))
- ☒ Measured distance between A and B (inches): 36 1/2
- ☒ 13. Increase the load to 50 pounds at a rate of no more than 50 pounds per second. Attain the load in not more than 5 seconds. (If webbing sensitive emergency locking retractors are installed as part of the lap belt or lap belt portion of the seat belt assembly, apply the load at a rate less than the threshold value for lock-up specified by the manufacturer.) Maintain the load for at least 5 seconds. Measure and record the distance between points A and B along the longitudinal centerline of the webbing. (S7.1.1.5(c)(5))
- ☒ Record onset rate (lb/sec) (spec. 10 to 50 lb/sec) (S7.1.1.5(c)(5)): 40
- ☒ Measured distance between A and B (inches) (S7.1.1.5(c)(6)): 37
- ☒ 14. Subtract the measurement in 13 from the measurement in 12. Is the difference 2 inches or less? (S7.1.1.5(c)(7))
- ☒ 13 - 12 = 1/2
- ☒ Yes – Pass
- ☐ No – Fail
- ☒ 15. Subtract the measurement in 9 from the measurement in 13. Is the difference 3 inches or more? (S7.1.1.5(c)(8))
- ☒ 9 - 13 = 22
- ☒ Yes – Pass
- ☐ No – Fail

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Zuhl

Date: 1/28/04

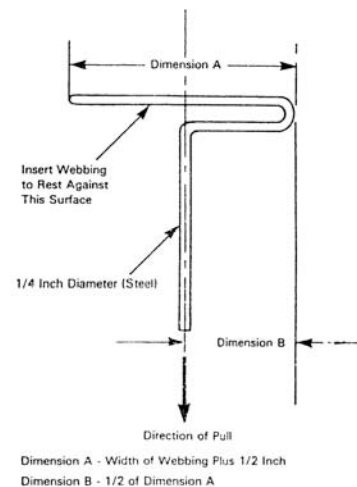


Figure 5. - Webbing Tension Pull Device

DATA SHEET 8

LAP BELT LOCKABILITY

**Passenger cars, trucks, buses, and multipurpose passenger
Vehicles with a GVWR of 10,000 pounds or less. (S7.1.1.5)**

Test Vehicle: 2004 Dodge Durango
Test Program: FMVSS 208 Compliance
Test Technician: Wayne Dahlke

NHTSA No.: C40303
Test Date: 1/28/04

Complete one of these forms for **each** designated seating position that can be adjusted to forward-facing or that is a forward-facing seat, other than the driver's seat (S7.1.1.5(a), **and** that has seat belt retractors that are not solely automatic locking retractors. (S7.1.1.5(c))

DESIGNATED SEATING POSITION:	Right Third Row Passenger
------------------------------	---------------------------

☐		N/A – no retractor is at this position	
☐		N/A – the retractor is an automatic locking retractor ONLY	
☒	1.	Record test fore-aft seat position: Not Adjustable (S7.1.1.5(c)(1)) (Any position is acceptable)	
☒	2.	Does the lap belt portion of the seat belt in the forward-facing seat or seat that can be adjusted to forward-facing consist of a locking device that does NOT have to be attached by the vehicle user to the seat belt webbing, retractor, or any other part of the vehicle. (S7.1.1.5 (a))	
☒		Yes – Pass	
☐		No – Fail	
☒	3.	Does the lap belt portion of the seat belt in the forward-facing seat or seat that can be adjusted to forward-facing consist of a locking device that does NOT require inverting, twisting or deforming of the belt webbing. (S7.1.1.5 (a))	
☒		Yes – Pass	
☐		No – Fail	
☒	4.	Buckle the seat belt. (S7.1.1.5(c)(1))	
☒	5.	Locate a reference point A on the seat belt buckle. (S7.1.1.5(c)(2))	
☒	6.	Locate a reference point B on the attachment hardware or retractor assembly at the other end of the lap belt or lap belt portion of the seat belt assembly. (S7.1.1.5(c)(2))	
☒	7.	Does the vehicle user need to take some action to activate the locking feature on the lap belt portion of the seat belt in any forward-facing seat or seat that can be adjusted to forward-facing?	
☒		Yes, go to 7.1	
☐		No, go to 8	
☒	7.1	Does the vehicle owner's manual include a description in words and/or diagrams describing how to activate the locking feature so that the seat belt assembly can tightly secure a child restraint system and how to deactivate the locking feature to remove the child restraint system. (S7.1.1.5(b))	
☒		Yes – Pass	
☐		No – Fail	
☒	8.	Adjust the lap belt or lap belt portion of the seat belt assembly according to any procedures recommended in the vehicle owner's manual to activate any locking feature so that the webbing between points A and B is at the maximum length allowed by the belt system. (S7.1.1.5(c)(2) & S7.1.1.5(c)(1))	

- ☒ 9. Measure and record the distance between points A and B along the longitudinal centerline of the webbing for the lap belt or lap belt portion of the seat belt assembly. (S7.1.1.5(c)(2))
- ☒ Measured distance between A and B (inches): 58 1/2
- ☒ 10. Readjust the belt system so that the webbing between points A and B is at any length that is 5 inches or more shorter than the maximum length of the webbing. (S7.1.1.5(c)(3))
- ☒ 11. To the lap belt or lap belt portion of the seat belt assembly, apply a preload of 10 pounds using the webbing tension pull device in Figure 5. Apply the load in a vertical plane parallel to the longitudinal axis of the vehicle and passing through the seating reference point of the designated seating position. Apply the preload in a horizontal direction toward the front of the vehicle with a force application angle of not less than 5 degrees nor more than 15 degrees above the horizontal. (S7.1.1.5(c)(4))
- ☒ Measured force application angle (Spec. 5-15 degrees): 5.6
- ☒ 12. Measure the length between points A and B along the longitudinal centerline of the webbing while the preload is being applied. (S7.1.1.5(c)(4))
- ☒ Measured distance between A and B (inches): 47
- ☒ 13. Increase the load to 50 pounds at a rate of no more than 50 pounds per second. Attain the load in not more than 5 seconds. (If webbing sensitive emergency locking retractors are installed as part of the lap belt or lap belt portion of the seat belt assembly, apply the load at a rate less than the threshold value for lock-up specified by the manufacturer.) Maintain the load for at least 5 seconds. Measure and record the distance between points A and B along the longitudinal centerline of the webbing. (S7.1.1.5(c)(5))
- ☒ Record onset rate (lb/sec) (spec. 10 to 50 lb/sec) (S7.1.1.5(c)(5)): 15
- ☒ Measured distance between A and B (inches) (S7.1.1.5(c)(6)): 47 1/4
- ☒ 14. Subtract the measurement in 13 from the measurement in 12. Is the difference 2 inches or less? (S7.1.1.5(c)(7))
- ☒ 13 - 12 = 1 1/4
- ☒ Yes – Pass
- ☐ No – Fail
- ☒ 15. Subtract the measurement in 9 from the measurement in 13. Is the difference 3 inches or more? (S7.1.1.5(c)(8))
- ☒ 9 - 13 = 11 1/4
- ☒ Yes – Pass
- ☐ No – Fail

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Zuhl

Date: 1/28/04

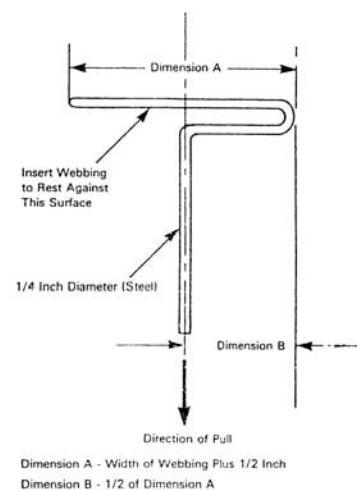


Figure 5. - Webbing Tension Pull Device

DATA SHEET 9

FMVSS 208 SEAT BELT WARNING SYSTEM CHECK (S7.3)

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Wayne Dahlke

NHTSA No.: C40303
 Test Date: 1/28/04

- | | | |
|----------|-----|---|
| X | 1. | The occupant is in the driver's seat. |
| X | 2. | The seat belt is in the stowed position. |
| X | 3. | The key is in the "on" or "start" position. |
| X | 4. | The time duration of the audible signal beginning with key "on" or "start" is |
| X | | Seconds: 6.0 |
| X | 5. | The occupant is in the driver's seat. |
| X | 6. | The seat belt is in the stowed position. |
| X | 7. | The key is in the "on" or "start" position. |
| X | 8. | The time duration of the warning light beginning with key "on" or "start" is |
| X | | Seconds: Stays On |
| X | 9. | The occupant is in the driver's seat. |
| X | 10. | The seat belt is in the latched position and with at least 4 inches of belt webbing extended. |
| X | 11. | The key is in the "on" or "start" position. |
| X | 12. | The time duration of the audible signal beginning with key "on" or "start" is |
| X | | Seconds: 0.0 |
| X | 13. | The occupant is in the driver's seat. |
| X | 14. | The seat belt is in the latched position and with at least 4 inches of belt webbing extended. |
| X | 15. | The key is in the "on" or "start" position. |
| X | 16. | The time duration of the warning light beginning with key "on" or "start" is |
| X | | Seconds: 6.0 |
| X | 17. | Complete the following table with the data from 4, 8, 12, and 16 to determine which option is used. |

		Warning light	Warning light specification	Audible signal	Audible signal specification*
S7.3 (a)(1)	Belt latched & key on or start	Item 16: 6		Item 12: 0	0 seconds**
	Belt stowed & key on or start	Item 8: Stays On	60 seconds minimum	Item 4: 6	4 to 8 seconds
S7.3 (a)(2)	Belt latched & key on or start	Item 16: 6	4 to 8 seconds	Item 12: 0	0 seconds**
	Belt stowed & key on or start	Item 8: Stays On	4 to 8 seconds	Item 4: 6	4 to 8 seconds

* 49 USCS @ 30124 does NOT allow an audible signal to operate for more than 8 seconds.

** 0 seconds means the light or audible signal are NOT permitted to operate under these conditions.
 See 7/12/00 interpretation to Patrick Raheer of Hogan and Hartson

- | | | | |
|-------------------------------------|-----|---|--|
| ☒ | 18. | The seat belt warning system meets the requirements of (manufacturers may comply with either section) | ☐ S7.3 (a)(1) |
| | | | ☒ S7.3 (a)(2) |
| | | | ☐ FAIL – does not meet the requirements of either option |
| ☒ | 19. | Note wording of visual warning: (S7.3(a)(1) and S7.3(a)(2)) | ☐ Fasten seat belts |
| | | | ☐ Fasten belts |
| | | | ☒ Symbol 101 |
| | | | ☐ FAIL – does not used any of the above working or symbol |

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Gahl

Date: 1/28/04

DATA SHEET 10

BELT CONTACT FORCE (S7.4.3)

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Wayne Dahlke

NHTSA No.: C40303
 Test Date: 1/28/04

Test all Type 2 seat belts other than those in walk-in van-type vehicles and those at front outboard designated seating positions in passenger cars. Complete a form for each applicable seat belt.

DESIGNATED SEATING POSITION:	Left Front Driver
------------------------------	-------------------

- | | | |
|----------|-----|--|
| X | 1. | Does the vehicle incorporate a webbing tension-relieving device? |
| | | ☐ Yes, this form is complete |
| | | X No, continue with this check sheet |
| X | 2. | Position the seat's adjustable lumbar supports so that the lumbar support is in its lowest, retracted or deflated adjustment position. (S8.1.3) |
| | | ☐ N/A, no lumbar adjustment |
| X | 3. | Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2) |
| | | X N/A, no additional support adjustment |
| X | 4. | Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2) |
| | | X N/A, no independent fore-aft seat cushion adjustment |
| X | 5. | If the seat cushion adjusts fore and aft, independent of the seat back, set this adjustment to the full rearward position. (S16.2.10.3.1) |
| | | X N/A, no independent seat cushion height adjustment |
| X | 6. | Put the seat in its full rearward position. (S16.2.10.3.1) |
| | | ☐ N/A, the seat does not have a fore-aft adjustment |
| X | 7. | If the seat cushion height adjusts independent of the seat back, set this adjustment to the full down position. (S16.2.10.3.1) |
| | | X N/A, no seat height adjustment |
| X | 8. | Draw a horizontal reference line on the side of the seat cushion. |
| X | 9. | Using only the controls that change the seat in the fore-aft direction, mark the fore-aft seat positions. Mark the side of the seat and a reference position directly below on a part of the vehicle that does not adjust. For manual seats, move the seat forward one detent at a time and mark each detent as was done for the full rearward position. For power seats, mark only the full rearward, middle, and full forward positions. Label three of the positions with the following: F for full forward, M for mid-position (if there is no mid position, label the closest adjustment position to the rear of the mid-point), and R for full rearward. |
| | | ☐ N/A, the seat does not have a fore-aft adjustment |
| X | 10. | Using only the controls that change the seat in the fore-aft direction, place the seat in the full rearward position and then place the seat in the middle fore-aft position for this test. (S8.1.2) |

- ☒ Mid position
If there is no mid position, put the seat in the closest adjustment position to the rear of the midpoint. Describe the location of the seat:
- ☒ 11. If seat adjustments other than fore-aft are present and the horizontal reference line is no longer horizontal, use those adjustments to maintain the reference line as closely as possible to the horizontal. (S16.2.10.3.2.1)
- ☐ N/A, no adjustments
Reference line angle as tested: Zero
- ☒ 12. The seat back angle, if adjustable, is set at the manufacturer's nominal design riding position for a 50th percentile adult male in the manner specified by the manufacturer. (S4.5.4.1 (b) and S8.1.3)
- ☐ N/A, no seat back angle adjustment
Manufacturer's design seat back angle: 12
- ☒ Tested seat back angle: 12
- ☒ 13. Position the test dummies according to dummy position placement instructions in Appendix B and include the positioning check sheets.
- ☒ 14. Fasten the seat belt latch.
- ☒ 15. Pull either 12 inches of belt webbing or the maximum available amount of belt webbing, whichever is less, from the retractor and then release it, allowing the belt webbing to return to the dummy's chest.
- ☒ 16. Locate the point where the centerline of the upper torso belt webbing crosses the midsagittal line on the dummy's chest. At that point pull the belt webbing out 3 inches from the dummy's chest and release until it is within one inch from the dummy's chest. (S10.8) Using a force measuring gage with a full scale range of no more than 1.5 pounds, measure the contact force perpendicular to the dummy's chest exerted by the belt webbing.
- ☒ Contact Force (lb): 0.56
- ☒ 0.0 to 0.7 pounds – Pass
☐ Greater than 0.7 pounds - Fail

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Gahlh

Date: 1/28/04

DATA SHEET 10

BELT CONTACT FORCE (S7.4.3)

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Wayne Dahlke

NHTSA No.: C40303
 Test Date: 1/28/04

Test all Type 2 seat belts other than those in walk-in van-type vehicles and those at front outboard designated seating positions in passenger cars. Complete a form for each applicable seat belt.

DESIGNATED SEATING POSITION:	Right Front Passenger
------------------------------	-----------------------

- | | | |
|----------|-----|--|
| X | 1. | Does the vehicle incorporate a webbing tension-relieving device? |
| | | ☐ Yes, this form is complete |
| | | X No, continue with this check sheet |
| X | 2. | Position the seat's adjustable lumbar supports so that the lumbar support is in its lowest, retracted or deflated adjustment position. (S8.1.3) |
| | | ☐ N/A, no lumbar adjustment |
| X | 3. | Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2) |
| | | X N/A, no additional support adjustment |
| X | 4. | Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2) |
| | | X N/A, no independent fore-aft seat cushion adjustment |
| X | 5. | If the seat cushion adjusts fore and aft, independent of the seat back, set this adjustment to the full rearward position. (S16.2.10.3.1) |
| | | X N/A, no independent seat cushion height adjustment |
| X | 6. | Put the seat in its full rearward position. (S16.2.10.3.1) |
| | | ☐ N/A, the seat does not have a fore-aft adjustment |
| X | 7. | If the seat cushion height adjusts independent of the seat back, set this adjustment to the full down position. (S16.2.10.3.1) |
| | | X N/A, no seat height adjustment |
| X | 8. | Draw a horizontal reference line on the side of the seat cushion. |
| X | 9. | Using only the controls that change the seat in the fore-aft direction, mark the fore-aft seat positions. Mark the side of the seat and a reference position directly below on a part of the vehicle that does not adjust. For manual seats, move the seat forward one detent at a time and mark each detent as was done for the full rearward position. For power seats, mark only the full rearward, middle, and full forward positions. Label three of the positions with the following: F for full forward, M for mid-position (if there is no mid position, label the closest adjustment position to the rear of the mid-point), and R for full rearward. |
| | | ☐ N/A, the seat does not have a fore-aft adjustment |
| X | 10. | Using only the controls that change the seat in the fore-aft direction, place the seat in the full rearward position and then place the seat in the middle fore-aft position for this test. (S8.1.2) |

- ☒ Mid position
If there is no mid position, put the seat in the closest adjustment position to the rear of the midpoint. Describe the location of the seat:
- ☒ 11. If seat adjustments other than fore-aft are present and the horizontal reference line is no longer horizontal, use those adjustments to maintain the reference line as closely as possible to the horizontal. (S16.2.10.3.2.1)
- ☒ N/A, no adjustments
Reference line angle as tested: Zero
- ☒ 12. The seat back angle, if adjustable, is set at the manufacturer's nominal design riding position for a 50th percentile adult male in the manner specified by the manufacturer. (S4.5.4.1 (b) and S8.1.3)
- ☐ N/A, no seat back angle adjustment
Manufacturer's design seat back angle: 12
- ☒ Tested seat back angle: 12
- ☒ 13. Position the test dummies according to dummy position placement instructions in Appendix B and include the positioning check sheets.
- ☒ 14. Fasten the seat belt latch.
- ☒ 15. Pull either 12 inches of belt webbing or the maximum available amount of belt webbing, whichever is less, from the retractor and then release it, allowing the belt webbing to return to the dummy's chest.
- ☒ 16. Locate the point where the centerline of the upper torso belt webbing crosses the midsagittal line on the dummy's chest. At that point pull the belt webbing out 3 inches from the dummy's chest and release until it is within one inch from the dummy's chest. (S10.8) Using a force measuring gage with a full scale range of no more than 1.5 pounds, measure the contact force perpendicular to the dummy's chest exerted by the belt webbing.
- ☒ Contact Force (lb): 0.43
- ☒ 0.0 to 0.7 pounds – Pass
- ☐ Greater than 0.7 pounds - Fail

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Zalk

Date: 1/28/04

DATA SHEET 10

BELT CONTACT FORCE (S7.4.3)

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Wayne Dahlke

NHTSA No.: C40303
 Test Date: 1/28/04

Test all Type 2 seat belts other than those in walk-in van-type vehicles and those at front outboard designated seating positions in passenger cars. Complete a form for each applicable seat belt.

DESIGNATED SEATING POSITION:	Left Rear Passenger
------------------------------	---------------------

- | | | |
|----------|-----|--|
| X | 1. | Does the vehicle incorporate a webbing tension-relieving device? |
| | | ☐ Yes, this form is complete |
| | | ☒ No, continue with this check sheet |
| X | 2. | Position the seat's adjustable lumbar supports so that the lumbar support is in its lowest, retracted or deflated adjustment position. (S8.1.3) |
| | | ☒ N/A, no lumbar adjustment |
| X | 3. | Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2) |
| | | ☒ N/A, no additional support adjustment |
| X | 4. | Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2) |
| | | ☒ N/A, no independent fore-aft seat cushion adjustment |
| X | 5. | If the seat cushion adjusts fore and aft, independent of the seat back, set this adjustment to the full rearward position. (S16.2.10.3.1) |
| | | ☒ N/A, no independent seat cushion height adjustment |
| X | 6. | Put the seat in its full rearward position. (S16.2.10.3.1) |
| | | ☒ N/A, the seat does not have a fore-aft adjustment |
| X | 7. | If the seat cushion height adjusts independent of the seat back, set this adjustment to the full down position. (S16.2.10.3.1) |
| | | ☒ N/A, no seat height adjustment |
| X | 8. | Draw a horizontal reference line on the side of the seat cushion. |
| X | 9. | Using only the controls that change the seat in the fore-aft direction, mark the fore-aft seat positions. Mark the side of the seat and a reference position directly below on a part of the vehicle that does not adjust. For manual seats, move the seat forward one detent at a time and mark each detent as was done for the full rearward position. For power seats, mark only the full rearward, middle, and full forward positions. Label three of the positions with the following: F for full forward, M for mid-position (if there is no mid position, label the closest adjustment position to the rear of the mid-point), and R for full rearward. |
| | | ☐ N/A, the seat does not have a fore-aft adjustment |
| X | 10. | Using only the controls that change the seat in the fore-aft direction, place the seat in the full rearward position and then place the seat in the middle fore-aft position for this test. (S8.1.2) |

	☐	Mid position
		If there is no mid position, put the seat in the closest adjustment position to the rear of the midpoint. Describe the location of the seat: Not adjustable
☒	11.	If seat adjustments other than fore-aft are present and the horizontal reference line is no longer horizontal, use those adjustments to maintain the reference line as closely as possible to the horizontal. (S16.2.10.3.2.1)
	☒	N/A, no adjustments
		Reference line angle as tested: N/A
☒	12	The seat back angle, if adjustable, is set at the manufacturer's nominal design riding position for a 50th percentile adult male in the manner specified by the manufacturer. (S4.5.4.1 (b) and S8.1.3)
	☒	N/A, no seat back angle adjustment
☐		Manufacturer's design seat back angle:
☐		Tested seat back angle:
☒	13.	Position the test dummies according to dummy position placement instructions in Appendix B and include the positioning check sheets.
☒	14.	Fasten the seat belt latch.
☒	15.	Pull either 12 inches of belt webbing or the maximum available amount of belt webbing, whichever is less, from the retractor and then release it, allowing the belt webbing to return to the dummy's chest.
☒	16.	Locate the point where the centerline of the upper torso belt webbing crosses the midsagittal line on the dummy's chest. At that point pull the belt webbing out 3 inches from the dummy's chest and release until it is within one inch from the dummy's chest. (S10.8) Using a force measuring gage with a full scale range of no more than 1.5 pounds, measure the contact force perpendicular to the dummy's chest exerted by the belt webbing.
☒		Contact Force (lb): 0.4
	☒	0.0 to 0.7 pounds – Pass
	☐	Greater than 0.7 pounds - Fail

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Zalk

Date: 1/28/04

DATA SHEET 10 **BELT CONTACT FORCE (S7.4.3)**

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Wayne Dahlke

NHTSA No.: C40303
 Test Date: 1/28/04

Test all Type 2 seat belts other than those in walk-in van-type vehicles and those at front outboard designated seating positions in passenger cars. Complete a form for each applicable seat belt.

DESIGNATED SEATING POSITION:	Center Rear Passenger
------------------------------	-----------------------

- | | | |
|----------|-----|--|
| X | 1. | Does the vehicle incorporate a webbing tension-relieving device? |
| | | ☐ Yes, this form is complete |
| | | X No, continue with this check sheet |
| X | 2. | Position the seat's adjustable lumbar supports so that the lumbar support is in its lowest, retracted or deflated adjustment position. (S8.1.3) |
| | | X N/A, no lumbar adjustment |
| X | 3. | Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2) |
| | | X N/A, no additional support adjustment |
| X | 4. | Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2) |
| | | X N/A, no independent fore-aft seat cushion adjustment |
| X | 5. | If the seat cushion adjusts fore and aft, independent of the seat back, set this adjustment to the full rearward position. (S16.2.10.3.1) |
| | | X N/A, no independent seat cushion height adjustment |
| X | 6. | Put the seat in its full rearward position. (S16.2.10.3.1) |
| | | X N/A, the seat does not have a fore-aft adjustment |
| X | 7. | If the seat cushion height adjusts independent of the seat back, set this adjustment to the full down position. (S16.2.10.3.1) |
| | | X N/A, no seat height adjustment |
| X | 8. | Draw a horizontal reference line on the side of the seat cushion. |
| X | 9. | Using only the controls that change the seat in the fore-aft direction, mark the fore-aft seat positions. Mark the side of the seat and a reference position directly below on a part of the vehicle that does not adjust. For manual seats, move the seat forward one detent at a time and mark each detent as was done for the full rearward position. For power seats, mark only the full rearward, middle, and full forward positions. Label three of the positions with the following: F for full forward, M for mid-position (if there is no mid position, label the closest adjustment position to the rear of the mid-point), and R for full rearward. |
| | | ☐ N/A, the seat does not have a fore-aft adjustment |
| X | 10. | Using only the controls that change the seat in the fore-aft direction, place the seat in the full rearward position and then place the seat in the middle fore-aft position for this test. (S8.1.2) |

- ☐ Mid position
- If there is no mid position, put the seat in the closest adjustment position to the rear of the midpoint. Describe the location of the seat: Not adjustable
- ☒ 11. If seat adjustments other than fore-aft are present and the horizontal reference line is no longer horizontal, use those adjustments to maintain the reference line as closely as possible to the horizontal. (S16.2.10.3.2.1)
- ☒ N/A, no adjustments
- Reference line angle as tested: N/A
- ☒ 12. The seat back angle, if adjustable, is set at the manufacturer's nominal design riding position for a 50th percentile adult male in the manner specified by the manufacturer. (S4.5.4.1 (b) and S8.1.3)
- ☒ N/A, no seat back angle adjustment
- Manufacturer's design seat back angle:
- ☒
- ☒
- ☒ 13. Tested seat back angle:
- Position the test dummies according to dummy position placement instructions in Appendix B and include the positioning check sheets.
- ☒ 14. Fasten the seat belt latch.
- ☒ 15. Pull either 12 inches of belt webbing or the maximum available amount of belt webbing, whichever is less, from the retractor and then release it, allowing the belt webbing to return to the dummy's chest.
- ☒ 16. Locate the point where the centerline of the upper torso belt webbing crosses the midsagittal line on the dummy's chest. At that point pull the belt webbing out 3 inches from the dummy's chest and release until it is within one inch from the dummy's chest. (S10.8) Using a force measuring gage with a full scale range of no more than 1.5 pounds, measure the contact force perpendicular to the dummy's chest exerted by the belt webbing.
- ☒ Contact Force (lb): 0.48
- ☒ 0.0 to 0.7 pounds – Pass
- ☐ Greater than 0.7 pounds - Fail

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Zalk

Date: 1/28/04

DATA SHEET 10 **BELT CONTACT FORCE (S7.4.3)**

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Wayne Dahlke

NHTSA No.: C40303
 Test Date: 1/28/04

Test all Type 2 seat belts other than those in walk-in van-type vehicles and those at front outboard designated seating positions in passenger cars. Complete a form for each applicable seat belt.

DESIGNATED SEATING POSITION:	Right Rear Passenger
------------------------------	----------------------

- | | | |
|----------|-----|--|
| X | 1. | Does the vehicle incorporate a webbing tension-relieving device? |
| | | ☐ Yes, this form is complete |
| | | X No, continue with this check sheet |
| X | 2. | Position the seat's adjustable lumbar supports so that the lumbar support is in its lowest, retracted or deflated adjustment position. (S8.1.3) |
| | | X N/A, no lumbar adjustment |
| X | 3. | Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2) |
| | | X N/A, no additional support adjustment |
| X | 4. | Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2) |
| | | X N/A, no independent fore-aft seat cushion adjustment |
| X | 5. | If the seat cushion adjusts fore and aft, independent of the seat back, set this adjustment to the full rearward position. (S16.2.10.3.1) |
| | | X N/A, no independent seat cushion height adjustment |
| X | 6. | Put the seat in its full rearward position. (S16.2.10.3.1) |
| | | X N/A, the seat does not have a fore-aft adjustment |
| X | 7. | If the seat cushion height adjusts independent of the seat back, set this adjustment to the full down position. (S16.2.10.3.1) |
| | | X N/A, no seat height adjustment |
| X | 8. | Draw a horizontal reference line on the side of the seat cushion. |
| X | 9. | Using only the controls that change the seat in the fore-aft direction, mark the fore-aft seat positions. Mark the side of the seat and a reference position directly below on a part of the vehicle that does not adjust. For manual seats, move the seat forward one detent at a time and mark each detent as was done for the full rearward position. For power seats, mark only the full rearward, middle, and full forward positions. Label three of the positions with the following: F for full forward, M for mid-position (if there is no mid position, label the closest adjustment position to the rear of the mid-point), and R for full rearward. |
| | | ☐ N/A, the seat does not have a fore-aft adjustment |
| X | 10. | Using only the controls that change the seat in the fore-aft direction, place the seat in the full rearward position and then place the seat in the middle fore-aft position for this test. (S8.1.2) |

- ☐ Mid position
- If there is no mid position, put the seat in the closest adjustment position to the rear of the midpoint. Describe the location of the seat: Not adjustable
- ☒ 11. If seat adjustments other than fore-aft are present and the horizontal reference line is no longer horizontal, use those adjustments to maintain the reference line as closely as possible to the horizontal. (S16.2.10.3.2.1)
- ☒ N/A, no adjustments
- Reference line angle as tested: N/A
- ☒ 12. The seat back angle, if adjustable, is set at the manufacturer's nominal design riding position for a 50th percentile adult male in the manner specified by the manufacturer. (S4.5.4.1 (b) and S8.1.3)
- ☒ N/A, no seat back angle adjustment
- Manufacturer's design seat back angle:
- ☒
- ☒
- ☒ 13. Tested seat back angle:
- Position the test dummies according to dummy position placement instructions in Appendix B and include the positioning check sheets.
- ☒ 14. Fasten the seat belt latch.
- ☒ 15. Pull either 12 inches of belt webbing or the maximum available amount of belt webbing, whichever is less, from the retractor and then release it, allowing the belt webbing to return to the dummy's chest.
- ☒ 16. Locate the point where the centerline of the upper torso belt webbing crosses the midsagittal line on the dummy's chest. At that point pull the belt webbing out 3 inches from the dummy's chest and release until it is within one inch from the dummy's chest. (S10.8) Using a force measuring gage with a full scale range of no more than 1.5 pounds, measure the contact force perpendicular to the dummy's chest exerted by the belt webbing.
- ☒ Contact Force (lb): 0.5
- ☒ 0.0 to 0.7 pounds – Pass
- ☐ Greater than 0.7 pounds - Fail

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Zalk

Date: 1/28/04

DATA SHEET 10

BELT CONTACT FORCE (S7.4.3)

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Wayne Dahlke

NHTSA No.: C40303
 Test Date: 1/28/04

Test all Type 2 seat belts other than those in walk-in van-type vehicles and those at front outboard designated seating positions in passenger cars. Complete a form for each applicable seat belt.

DESIGNATED SEATING POSITION:	Left Third Row Passenger
------------------------------	--------------------------

- | | | |
|----------|-----|--|
| X | 1. | Does the vehicle incorporate a webbing tension-relieving device? |
| | | ☐ Yes, this form is complete |
| | | X No, continue with this check sheet |
| X | 2. | Position the seat's adjustable lumbar supports so that the lumbar support is in its lowest, retracted or deflated adjustment position. (S8.1.3) |
| | | X N/A, no lumbar adjustment |
| X | 3. | Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2) |
| | | X N/A, no additional support adjustment |
| X | 4. | Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2) |
| | | X N/A, no independent fore-aft seat cushion adjustment |
| X | 5. | If the seat cushion adjusts fore and aft, independent of the seat back, set this adjustment to the full rearward position. (S16.2.10.3.1) |
| | | X N/A, no independent seat cushion height adjustment |
| X | 6. | Put the seat in its full rearward position. (S16.2.10.3.1) |
| | | X N/A, the seat does not have a fore-aft adjustment |
| X | 7. | If the seat cushion height adjusts independent of the seat back, set this adjustment to the full down position. (S16.2.10.3.1) |
| | | X N/A, no seat height adjustment |
| X | 8. | Draw a horizontal reference line on the side of the seat cushion. |
| X | 9. | Using only the controls that change the seat in the fore-aft direction, mark the fore-aft seat positions. Mark the side of the seat and a reference position directly below on a part of the vehicle that does not adjust. For manual seats, move the seat forward one detent at a time and mark each detent as was done for the full rearward position. For power seats, mark only the full rearward, middle, and full forward positions. Label three of the positions with the following: F for full forward, M for mid-position (if there is no mid position, label the closest adjustment position to the rear of the mid-point), and R for full rearward. |
| | | ☐ N/A, the seat does not have a fore-aft adjustment |
| X | 10. | Using only the controls that change the seat in the fore-aft direction, place the seat in the full rearward position and then place the seat in the middle fore-aft position for this test. (S8.1.2) |

- ☐ Mid position
- If there is no mid position, put the seat in the closest adjustment position to the rear of the midpoint. Describe the location of the seat: Not adjustable
- ☒ 11. If seat adjustments other than fore-aft are present and the horizontal reference line is no longer horizontal, use those adjustments to maintain the reference line as closely as possible to the horizontal. (S16.2.10.3.2.1)
- ☒ N/A, no adjustments
- Reference line angle as tested: N/A
- ☒ 12. The seat back angle, if adjustable, is set at the manufacturer's nominal design riding position for a 50th percentile adult male in the manner specified by the manufacturer. (S4.5.4.1 (b) and S8.1.3)
- ☒ N/A, no seat back angle adjustment
- Manufacturer's design seat back angle:
- ☒
- ☒
- ☒ 13. Tested seat back angle:
- Position the test dummies according to dummy position placement instructions in Appendix B and include the positioning check sheets.
- ☒ 14. Fasten the seat belt latch.
- ☒ 15. Pull either 12 inches of belt webbing or the maximum available amount of belt webbing, whichever is less, from the retractor and then release it, allowing the belt webbing to return to the dummy's chest.
- ☒ 16. Locate the point where the centerline of the upper torso belt webbing crosses the midsagittal line on the dummy's chest. At that point pull the belt webbing out 3 inches from the dummy's chest and release until it is within one inch from the dummy's chest. (S10.8) Using a force measuring gage with a full scale range of no more than 1.5 pounds, measure the contact force perpendicular to the dummy's chest exerted by the belt webbing.
- ☒ Contact Force (lb): 0.54
- ☒ 0.0 to 0.7 pounds – Pass
- ☐ Greater than 0.7 pounds - Fail

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Zuhl

Date: 1/28/04

DATA SHEET 10

BELT CONTACT FORCE (S7.4.3)

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Wayne Dahlke

NHTSA No.: C40303
 Test Date: 1/28/04

Test all Type 2 seat belts other than those in walk-in van-type vehicles and those at front outboard designated seating positions in passenger cars. Complete a form for each applicable seat belt.

DESIGNATED SEATING POSITION:	Right Third Row Passenger
------------------------------	---------------------------

- | | | |
|----------|-----|--|
| X | 1. | Does the vehicle incorporate a webbing tension-relieving device? |
| | | ☐ Yes, this form is complete |
| | | X No, continue with this check sheet |
| X | 2. | Position the seat's adjustable lumbar supports so that the lumbar support is in its lowest, retracted or deflated adjustment position. (S8.1.3) |
| | | X N/A, no lumbar adjustment |
| X | 3. | Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2) |
| | | X N/A, no additional support adjustment |
| X | 4. | Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2) |
| | | X N/A, no independent fore-aft seat cushion adjustment |
| X | 5. | If the seat cushion adjusts fore and aft, independent of the seat back, set this adjustment to the full rearward position. (S16.2.10.3.1) |
| | | X N/A, no independent seat cushion height adjustment |
| X | 6. | Put the seat in its full rearward position. (S16.2.10.3.1) |
| | | X N/A, the seat does not have a fore-aft adjustment |
| X | 7. | If the seat cushion height adjusts independent of the seat back, set this adjustment to the full down position. (S16.2.10.3.1) |
| | | X N/A, no seat height adjustment |
| X | 8. | Draw a horizontal reference line on the side of the seat cushion. |
| X | 9. | Using only the controls that change the seat in the fore-aft direction, mark the fore-aft seat positions. Mark the side of the seat and a reference position directly below on a part of the vehicle that does not adjust. For manual seats, move the seat forward one detent at a time and mark each detent as was done for the full rearward position. For power seats, mark only the full rearward, middle, and full forward positions. Label three of the positions with the following: F for full forward, M for mid-position (if there is no mid position, label the closest adjustment position to the rear of the mid-point), and R for full rearward. |
| | | ☐ N/A, the seat does not have a fore-aft adjustment |
| X | 10. | Using only the controls that change the seat in the fore-aft direction, place the seat in the full rearward position and then place the seat in the middle fore-aft position for this test. (S8.1.2) |

- ☐ Mid position
- If there is no mid position, put the seat in the closest adjustment position to the rear of the midpoint. Describe the location of the seat: Not adjustable
- ☒ 11. If seat adjustments other than fore-aft are present and the horizontal reference line is no longer horizontal, use those adjustments to maintain the reference line as closely as possible to the horizontal. (S16.2.10.3.2.1)
- ☒ N/A, no adjustments
- Reference line angle as tested: N/A
- ☒ 12. The seat back angle, if adjustable, is set at the manufacturer's nominal design riding position for a 50th percentile adult male in the manner specified by the manufacturer. (S4.5.4.1 (b) and S8.1.3)
- ☒ N/A, no seat back angle adjustment
- Manufacturer's design seat back angle:
- ☒
- ☒
- ☒ 13. Tested seat back angle:
- Position the test dummies according to dummy position placement instructions in Appendix B and include the positioning check sheets.
- ☒ 14. Fasten the seat belt latch.
- ☒ 15. Pull either 12 inches of belt webbing or the maximum available amount of belt webbing, whichever is less, from the retractor and then release it, allowing the belt webbing to return to the dummy's chest.
- ☒ 16. Locate the point where the centerline of the upper torso belt webbing crosses the midsagittal line on the dummy's chest. At that point pull the belt webbing out 3 inches from the dummy's chest and release until it is within one inch from the dummy's chest. (S10.8) Using a force measuring gage with a full scale range of no more than 1.5 pounds, measure the contact force perpendicular to the dummy's chest exerted by the belt webbing.
- ☒ Contact Force (lb): 0.54
- ☒ 0.0 to 0.7 pounds – Pass
- ☐ Greater than 0.7 pounds - Fail

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Zalk

Date: 1/28/04

DATA SHEET 11

LATCH PLATE ACCESS (S7.4.4)

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Wayne Dahlke

NHTSA No.: C40303
 Test Date: 1/28/04

Test all front outboard seat belts other than those in walk-in van-type vehicles and those at front outboard designated seating positions in passenger cars. Complete a form for each applicable seat belt.

DESIGNATED SEATING POSITION:	Left Front Driver
------------------------------	-------------------

- | | | |
|----------|-----|--|
| X | 1. | Position the seat's adjustable lumbar supports so that the lumbar support is in its lowest, retracted or deflated adjustment position. (8.1.3) |
| | | ☐ N/A, no lumbar adjustment |
| X | 2. | Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2) |
| | | X N/A, no additional support adjustment |
| X | 3. | If the seat cushion adjusts fore and aft, independent of the seat back, set this adjustment to the full rearward position. (S16.2.10.3.1) |
| | | ☐ N/A, no independent fore-aft seat cushion adjustment |
| X | 4. | If the seat cushion height adjusts independent of the seat back, set this adjustment to the full down position. (S16.2.10.3.1) |
| | | X N/A, no independent seat cushion height adjustment |
| X | 5. | Put the seat in its full rearward position. (S16.2.10.3.1) |
| | | ☐ N/A, the seat does not have a fore-aft adjustment |
| X | 6. | If the seat height is adjustable, put it in the full down position. (S16.2.10.3.1) |
| | | ☐ N/A, no seat height adjustment |
| X | 7. | Draw a horizontal reference line on the side of the seat cushion |
| X | 8. | Using only the controls that change the seat in the fore-aft direction, mark the fore-aft seat positions. Mark the side of the seat and a reference position directly below on a part of the vehicle that does not adjust. For manual seats, move the seat forward one detent at a time and mark each detent as was done for the full rearward position. For power seats, mark only the full rearward, middle, and full forward positions. Label three of the positions with the following: F for full forward, M for mid-position (if there is no mid position, label the closest adjustment position to the rear of the mid-point), and R for full rearward. |
| | | ☐ N/A, the seat does not have a fore-aft adjustment. |
| X | 9. | Using only the controls that change the seat in the fore-aft direction, place the seat in the full rearward position and then place the seat in the forward most fore-aft position for this test. (S10.7) |
| X | 10. | If seat adjustments, other than fore-aft, are present and the horizontal reference line is no longer horizontal, use those adjustments to maintain the reference line as closely as possible to the horizontal. |
| | | ☐ N/A, no adjustments |

☒		Reference line angle as tested: Zero
☒	11.	The seat back angle, if adjustable, is set at the manufacturer's nominal design riding position for a 50th percentile adult male in the manner specified by the manufacturer. (S4.5.4.1 (b) and S8.1.3)
☐		N/A, no seat back angle adjustment
☒		Manufacturer's design seat back angle: 12
☒		Tested seat back angle: 12
☒	12.	Position the test dummy using the procedures in Appendix A. (Some modifications to the positioning procedure may need to be made because the seat is in its forward most position. Note on the Appendix A positioning check sheet any deviations necessary to position the Part 572, Subpart E dummy.) Include the positioning check sheet with this form.
☒	13.	Position the adjustable seat belt anchorage in the manufacturer's nominal design position for a 50 th percentile adult male occupant.
☒	14.	Attach the inboard reach string to the base of the head following the instructions on Figure 3.
☒	15.	Attach the outboard reach string to the torso sheath following the instructions on Figure 3.
☒	16.	Place the latch plate in the stowed position.
☒	17.	Extend inboard reach string in front of the dummy and then backward and outboard to the latch plate to generate an arc of the reach envelope of the test dummy's arms. Is the latch plate within the reach envelope?
☒		Yes – Pass
☐		No
☒	18.	Extend outboard reach string in front of the dummy and then backward and outboard to the latch plate to generate an arc of the reach envelope of the test dummy's arms. Is the latch plate within the reach envelope?
☒		Yes – Pass
☐		No
☒	19.	Is the latch plate within the inboard (item 17) or outboard (item 18) reach envelope?
☒		Yes – Pass
☐		No – Fail
☒	20.	Using the clearance test block, specified in Figure 4, is there sufficient clearance between the vehicle seat and the side of vehicle interior to allow the test block to move unhindered to the latch plate or buckle?
☒		Yes – Pass
☐		No – Fail

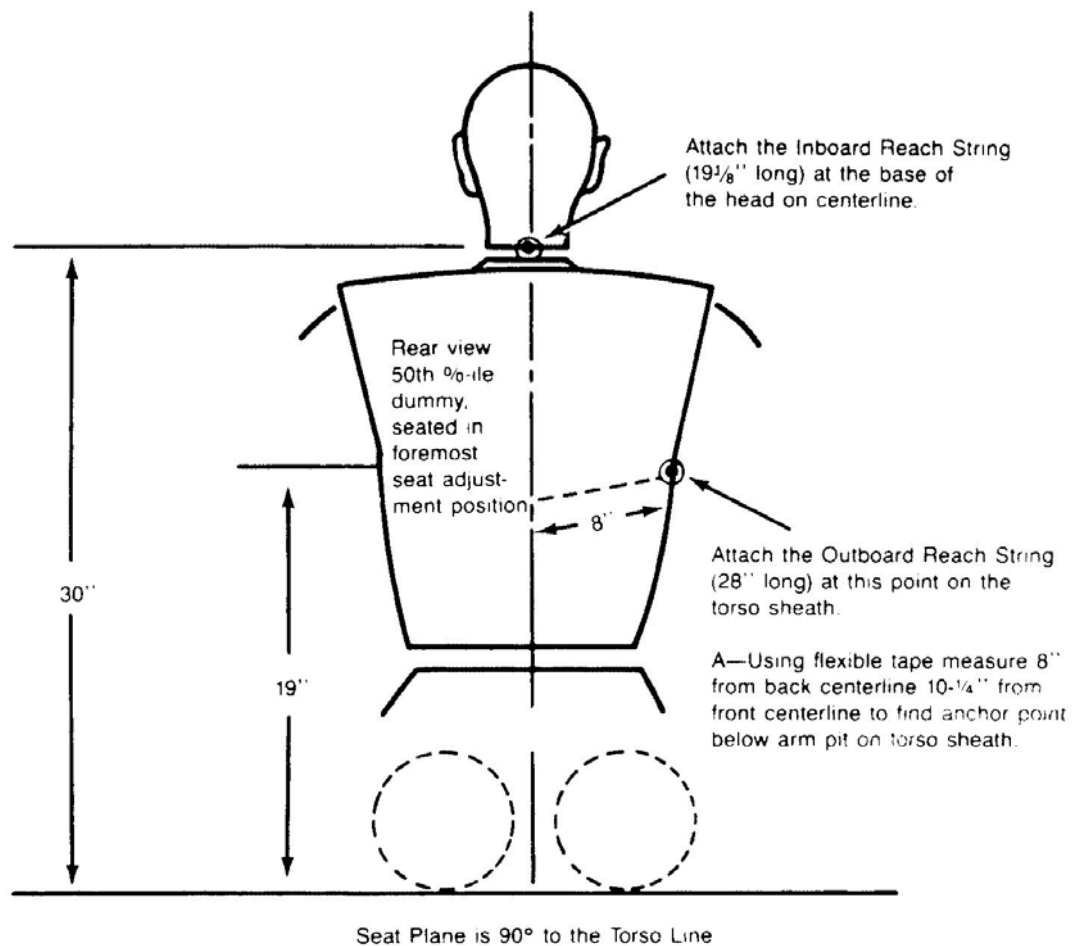


Figure 3. Location of Anchoring Points for Latchplate Reach Limiting Chains or Strings to Test for Latchplate Accessibility Using Subpart E Test Device

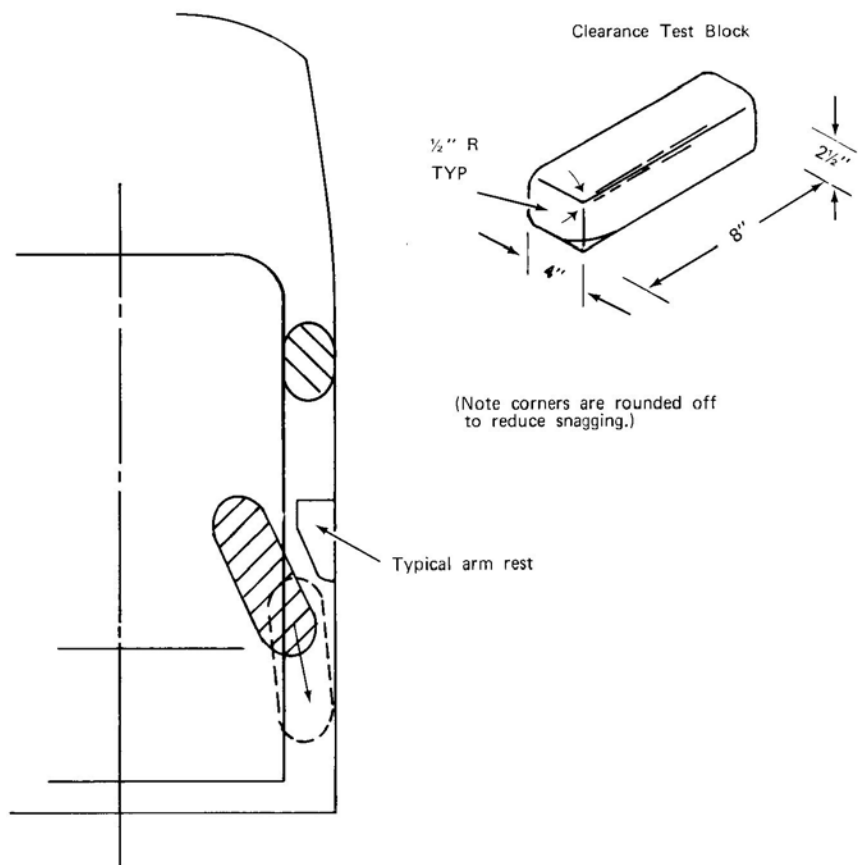


Figure 4—USE OF CLEARANCE TEST BLOCK TO DETERMINE HAND/ARM ACCESS

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Zuhl

Date: 1/28/04

DATA SHEET 11

LATCH PLATE ACCESS (S7.4.4)

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Wayne Dahlke

NHTSA No.: C40303
 Test Date: 1/28/04

Test all front outboard seat belts other than those in walk-in van-type vehicles and those at front outboard designated seating positions in passenger cars. Complete a form for each applicable seat belt.

DESIGNATED SEATING POSITION:	Right Front Passenger
------------------------------	-----------------------

- | | | |
|--|-----|--|
| <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; margin: 0 auto;">X</div> | 1. | Position the seat's adjustable lumbar supports so that the lumbar support is in its lowest, retracted or deflated adjustment position. (8.1.3) |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;">X</div> N/A, no lumbar adjustment |
| <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; margin: 0 auto;">X</div> | 2. | Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2) |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;">X</div> N/A, no additional support adjustment |
| <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; margin: 0 auto;">X</div> | 3. | If the seat cushion adjusts fore and aft, independent of the seat back, set this adjustment to the full rearward position. (S16.2.10.3.1) |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;">X</div> N/A, no independent fore-aft seat cushion adjustment |
| <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; margin: 0 auto;">X</div> | 4. | If the seat cushion height adjusts independent of the seat back, set this adjustment to the full down position. (S16.2.10.3.1) |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;">X</div> N/A, no independent seat cushion height adjustment |
| <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; margin: 0 auto;">X</div> | 5. | Put the seat in its full rearward position. (S16.2.10.3.1) |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;"></div> N/A, the seat does not have a fore-aft adjustment |
| <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; margin: 0 auto;">X</div> | 6. | If the seat height is adjustable, put it in the full down position. (S16.2.10.3.1) |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;">X</div> N/A, no seat height adjustment |
| <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; margin: 0 auto;">X</div> | 7. | Draw a horizontal reference line on the side of the seat cushion |
| <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; margin: 0 auto;">X</div> | 8. | Using only the controls that change the seat in the fore-aft direction, mark the fore-aft seat positions. Mark the side of the seat and a reference position directly below on a part of the vehicle that does not adjust. For manual seats, move the seat forward one detent at a time and mark each detent as was done for the full rearward position. For power seats, mark only the full rearward, middle, and full forward positions. Label three of the positions with the following: F for full forward, M for mid-position (if there is no mid position, label the closest adjustment position to the rear of the mid-point), and R for full rearward. |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;"></div> N/A, the seat does not have a fore-aft adjustment. |
| <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; margin: 0 auto;">X</div> | 9. | Using only the controls that change the seat in the fore-aft direction, place the seat in the full rearward position and then place the seat in the forward most fore-aft position for this test. (S10.7) |
| <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; margin: 0 auto;">X</div> | 10. | If seat adjustments, other than fore-aft, are present and the horizontal reference line is no longer horizontal, use those adjustments to maintain the reference line as closely as possible to the horizontal. |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;"></div> N/A, no adjustments |

☒		Reference line angle as tested: Zero
☒	11.	The seat back angle, if adjustable, is set at the manufacturer's nominal design riding position for a 50th percentile adult male in the manner specified by the manufacturer. (S4.5.4.1 (b) and S8.1.3)
☐		N/A, no seat back angle adjustment
☒		Manufacturer's design seat back angle: 12
☒		Tested seat back angle: 12
☒	12.	Position the test dummy using the procedures in Appendix A. (Some modifications to the positioning procedure may need to be made because the seat is in its forward most position. Note on the Appendix A positioning check sheet any deviations necessary to position the Part 572, Subpart E dummy.) Include the positioning check sheet with this form.
☒	13.	Position the adjustable seat belt anchorage in the manufacturer's nominal design position for a 50 th percentile adult male occupant.
☒	14.	Attach the inboard reach string to the base of the head following the instructions on Figure 3.
☒	15.	Attach the outboard reach string to the torso sheath following the instructions on Figure 3.
☒	16.	Place the latch plate in the stowed position.
☒	17.	Extend inboard reach string in front of the dummy and then backward and outboard to the latch plate to generate an arc of the reach envelope of the test dummy's arms. Is the latch plate within the reach envelope?
☒		Yes – Pass
☐		No
☒	18.	Extend outboard reach string in front of the dummy and then backward and outboard to the latch plate to generate an arc of the reach envelope of the test dummy's arms. Is the latch plate within the reach envelope?
☒		Yes – Pass
☐		No
☒	19.	Is the latch plate within the inboard (item 17) or outboard (item 18) reach envelope?
☒		Yes – Pass
☐		No – Fail
☒	20.	Using the clearance test block, specified in Figure 4, is there sufficient clearance between the vehicle seat and the side of vehicle interior to allow the test block to move unhindered to the latch plate or buckle?
☒		Yes – Pass
☐		No – Fail

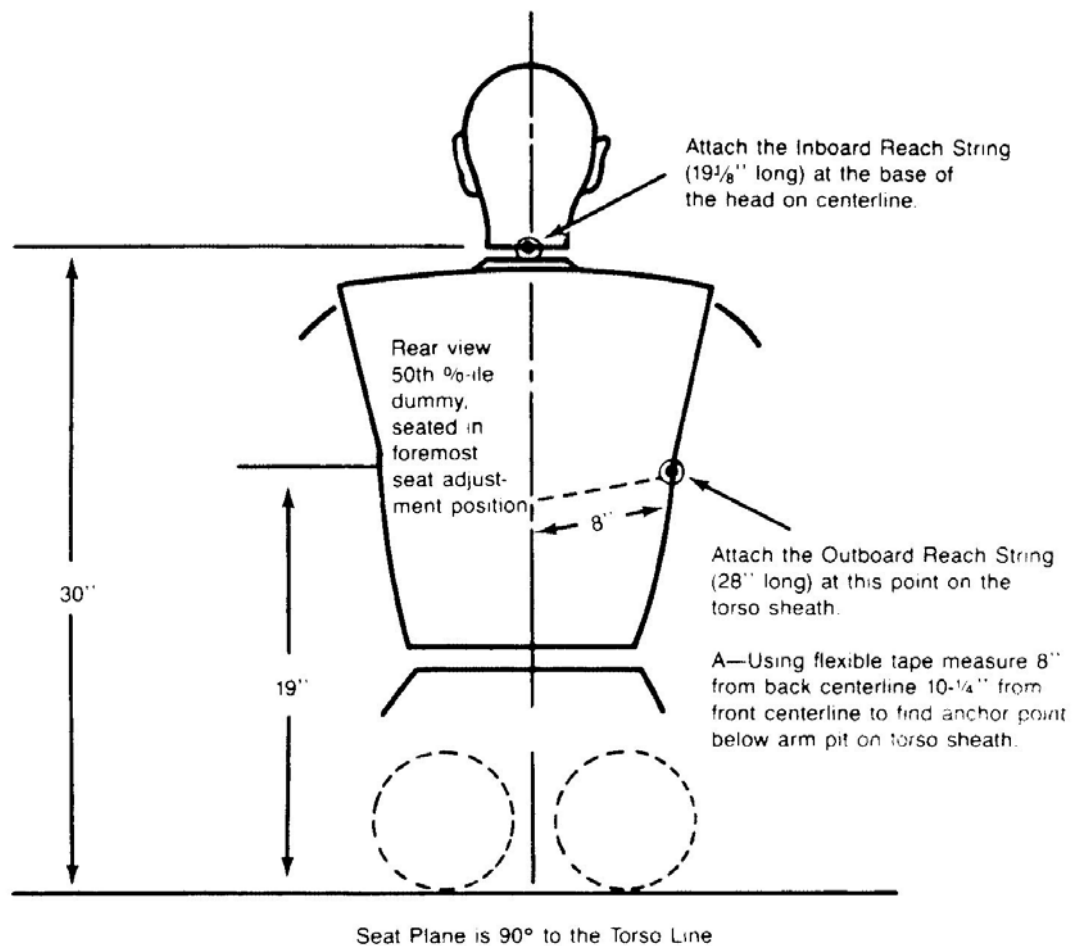


Figure 3. Location of Anchoring Points for Latchplate Reach Limiting Chains or Strings to Test for Latchplate Accessibility Using Subpart E Test Device

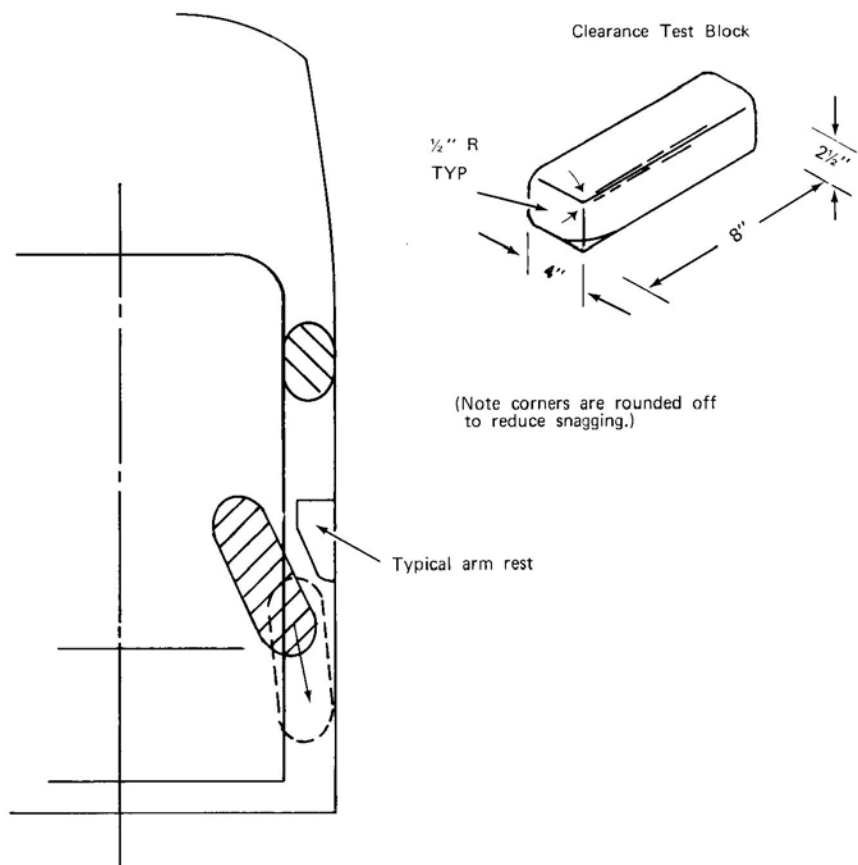


Figure 4—USE OF CLEARANCE TEST BLOCK TO DETERMINE HAND/ARM ACCESS

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Zuhl

Date: 1/28/04

DATA SHEET 12

SEAT BELT RETRACTION (S7.4.5)

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Wayne Dahlke

NHTSA No.: C40303
 Test Date: 1/28/04

Test all front outboard seat belts other than those in walk-in van-type vehicles and those at front outboard designated seating positions in passenger cars. Complete a form for each applicable seat belt.

DESIGNATED SEATING POSITION:	Left Front Driver
GVWR:	2994 kg

- X**

1. Is the vehicle a passenger car or walk-in van-type vehicle?

Yes, this form is complete

X

No
- X**

2. Position the seat's adjustable lumbar supports so that the lumbar support is in its lowest, retracted or deflated adjustment position. (S8.1.3)

N/A, no lumbar adjustment
- X**

3. Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2)

X

N/A, no additional support adjustment
- X**

4. If the seat cushion adjusts fore and aft, independent of the seat back, set this adjustment to the full rearward position.) (S16.2.10.3.1)

X

N/A, no independent fore-aft seat cushion adjustment
- X**

5. If the seat cushion height adjusts independent of the seat back, set this adjustment to the full down position. (S16.2.10.3.1)

X

N/A, no independent seat cushion height adjustment
- X**

6. Put the seat in its full rearward position.

N/A, the seat does not have a fore-aft adjustment
- X**

7. If the seat height is adjustable, put it in the full down position. (S8.1.2)

N/A, no seat adjustment
- X**

8. Draw a horizontal line on the side of the seat cushion.
- X**

9. Using only the controls that change the seat in the fore-aft direction, mark the fore-aft seat positions. Mark the side of the seat and a reference position directly below on a part of the vehicle that does not adjust. For manual seats, move the seat forward one detent at a time and mark each detent as was done for the full rearward position. For power seats, mark only the full rearward, middle, and full forward positions. Label three of the positions with the following: F for full forward, M for mid-position (if there is no mid position, label the closest adjustment position to the rear of the mid-point), and R for full rearward.

N/A, the seat does not have a fore-aft adjustment.
- X**

10. Using only the controls that change the seat in the fore-aft direction, place the seat in the middle fore-aft position. (S8.1.2)
- N/A**

If there is no mid position, put the seat in the closest adjustment position to the rear of the midpoint. Describe the location of the seat:

- ☒ 11. If seat adjustments, other than fore-aft, are present and the reference line is no longer horizontal, use those adjustments to maintain the reference line as closely as possible to the horizontal. (S16.2.10.3.2)
- ☒ N/A – no seat adjustment
- ☒ Reference angle as tested: Zero
- ☒ 12. The seat back angle, if adjustable, is set at the manufacturer's nominal design riding position for a 50th percentile adult male in the manner specified by the manufacturer. (S8.1.3)
- ☐ N/A – no seat back angle adjustment
- ☒ Manufacturer's design seat back angle: 12
- ☒ Tested seat back angle: 12
- ☒ 13. If adjustable, set the head restraint at the full up and full forward position. (S8.1.3) Any adjustment of the head restraint shall be used to position it full forward. For example, if it rotates, rotate it such that the head restraint extends as far forward as possible.
- ☐ N/A – no head restraint adjustment
- ☒ 14. Place any adjustable seat belt anchorages at the vehicle manufacturer's nominal design position for a 50th percentile adult male occupant (S8.1.3)
- ☐ N/A – no adjustable upper seat belt anchorage
- ☒ Manufacturer's specified anchorage position: 3 of 5
- ☒ Tested anchorage position: 3 of 5
- ☒ 15. Is the driver seat a bucket seat?
- ☒ Yes, go to 15.1 and skip 15.2.
- ☐ No, go to 15.2 and skip 15.1
- ☒ 15.1 Bucket seats - Locate and mark a vertical Plane B through the longitudinal centerline of the seat. The longitudinal centerline of a bucket seat cushion is determined at the widest part of the seat cushion. Measure perpendicular to the longitudinal centerline of the vehicle.
- ☒ Record the width of the seat: 520 mm
- ☒ Record the distance from the edge of the seat to Plane B. 260 mm
- ☐ 15.2 Bench seats (including split bench seats):
- ☐ Driver seat: Locate and mark a vertical Plane B through the center of the steering wheel parallel to the vehicle longitudinal centerline.
- ☐ Passenger seat: Locate and mark a vertical longitudinal Plane B on the seat that is the same distance from the longitudinal centerline of the vehicle as the center of the steering wheel.
- ☐ Distance from the vehicle centerline to the center of the steering wheel:
- ☐ Distance from the vehicle centerline to Plane B:
- ☒ 16. Stow outboard armrests that are capable of being stowed. (S7.4.5)
- ☒ 17. Remove the arms of a Subpart E dummy and place it in the seat such that the midsagittal plane is coincident with Plane B and the upper torso rests against the seat back. (S10.4.1.1 & S10.4.1.2)
- ☒ 18. Rest the thighs on the seat cushion

- ☒ 19. Position the H-point of the dummy within 0.5 inch of the vertical dimension and 0.5 inch of the horizontal dimension of a point 0.25 inch below the H-point determined by using the equipment and procedures specified in SAE J826 (APR 1980). (S10.4.2.1) Then measure the pelvic angle with respect to the horizontal using the pelvic angle gage. Adjust the dummy position until these three measurements are within the specifications. (S10.4.2.1 and S10.4.2.2)
- ☒ Horizontal inches from the point 0.25 below the determined H-point (0.5 inch max.) (S10.4.2.1)
 - ☒ Vertical inches from the point 0.25 below the determined H-point (0.5 inch max.) (S10.4.2.1)
 - ☒ Pelvic angle (20° to 25°)
 - ☒ Vertical inches from the point 0.25 below the determined H-point (0.5 inch max.) (S10.4.2.1)
 - ☒ Pelvic angle (20° to 25°) (S10.4.2.2)
- ☒ 20. Set the distance between the outboard knee clevis flange surfaces at 10.6 inches.
Measured distance (10.6 inches) (S10.5): 10.5
- ☒ 21. To the extent practicable keep the thighs and the legs in a vertical plane (S10.5) and rest the thighs on the seat cushion while resting the feet on the floorpan or toe board.
- ☒ 22. Fasten the seat belt around the dummy.
- ☒ 23. Remove all slack from the lap belt portion. (S10.9)
- ☒ 24. Pull the upper torso webbing out of the retractor and allow it to retract; repeat this four times. (S10.9)
- ☒ 25. Apply a 2 to 4 pound tension load to the lap belt. (S10.9)
Pound load applied: 3
- ☒ 26. Is the belt system equipped with a tension relieving device?
- ☐ __ Yes, continue
 - ☒ __ No, go to 27
- ☐ 26.1 Introduce the maximum amount of slack into the upper torso bet that is recommended by the vehicle manufacturer in the vehicle owner's manual. (S10.9). Go to 25.
- ☒ 27. Check the statement that applies to this test vehicle:
- ☒ 27.1 Check the statement that applies to this test vehicle:
The torso and lap belt webbing of the seat belt system automatically retracts to a stowed position when the adjacent vehicle door is in an open position and the seat belt latch plate is released.
- ☐ Pass
- 27.2 The torso and lap belt webbing of the seat belt system automatically retracts when the seat belt latch plate is released.
- ☒ Pass
- 27.3
- ☐ Neither A or B apply
 - ☐ Fail
- ☒ 28. With the webbing and hardware in the stowed position are the webbing and hardware prevented from being pinched when the door is closed?
- ☒ Yes – Pass
 - ☐ No – Fail

- ☒ 29. If this test vehicle has an open body (without doors) and has a belt system with a tension-relieving device, does the belt system fully retract when the tension-relieving device is deactivated?

- ☒ N/A
☐ Yes – Pass
☐ No – Fail

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Zuhl

Date: 1/28/04

DATA SHEET 12

SEAT BELT RETRACTION (S7.4.5)

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Wayne Dahlke

NHTSA No.: C40303
 Test Date: 1/28/04

Test all front outboard seat belts other than those in walk-in van-type vehicles and those at front outboard designated seating positions in passenger cars. Complete a form for each applicable seat belt.

DESIGNATED SEATING POSITION:	Right Front Passenger
GVWR:	2994 kg

- X

1. Is the vehicle a passenger car or walk-in van-type vehicle?

Yes, this form is complete

X

No
- X

2. Position the seat's adjustable lumbar supports so that the lumbar support is in its lowest, retracted or deflated adjustment position. (S8.1.3)

N/A, no lumbar adjustment
- X

3. Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2)

X

N/A, no additional support adjustment
- X

4. If the seat cushion adjusts fore and aft, independent of the seat back, set this adjustment to the full rearward position.) (S16.2.10.3.1)

X

N/A, no independent fore-aft seat cushion adjustment
- X

5. If the seat cushion height adjusts independent of the seat back, set this adjustment to the full down position. (S16.2.10.3.1)

X

N/A, no independent seat cushion height adjustment
- X

6. Put the seat in its full rearward position.

N/A, the seat does not have a fore-aft adjustment
- X

7. If the seat height is adjustable, put it in the full down position. (S8.1.2)

N/A, no seat adjustment
- X

8. Draw a horizontal line on the side of the seat cushion.
- X

9. Using only the controls that change the seat in the fore-aft direction, mark the fore-aft seat positions. Mark the side of the seat and a reference position directly below on a part of the vehicle that does not adjust. For manual seats, move the seat forward one detent at a time and mark each detent as was done for the full rearward position. For power seats, mark only the full rearward, middle, and full forward positions. Label three of the positions with the following: F for full forward, M for mid-position (if there is no mid position, label the closest adjustment position to the rear of the mid-point), and R for full rearward.

N/A, the seat does not have a fore-aft adjustment.
- X

10. Using only the controls that change the seat in the fore-aft direction, place the seat in the middle fore-aft position. (S8.1.2)
- N/A

If there is no mid position, put the seat in the closest adjustment position to the rear of the midpoint. Describe the location of the seat:

- ☒ 11. If seat adjustments, other than fore-aft, are present and the reference line is no longer horizontal, use those adjustments to maintain the reference line as closely as possible to the horizontal. (S16.2.10.3.2)
- ☒ N/A – no seat adjustment
- ☒ Reference angle as tested: Zero
- ☒ 12. The seat back angle, if adjustable, is set at the manufacturer's nominal design riding position for a 50th percentile adult male in the manner specified by the manufacturer. (S8.1.3)
- ☐ N/A – no seat back angle adjustment
- ☒ Manufacturer's design seat back angle: 12
- ☒ Tested seat back angle: 12
- ☒ 13. If adjustable, set the head restraint at the full up and full forward position. (S8.1.3) Any adjustment of the head restraint shall be used to position it full forward. For example, if it rotates, rotate it such that the head restraint extends as far forward as possible.
- ☐ N/A – no head restraint adjustment
- ☒ 14. Place any adjustable seat belt anchorages at the vehicle manufacturer's nominal design position for a 50th percentile adult male occupant (S8.1.3)
- ☐ N/A – no adjustable upper seat belt anchorage
- ☒ Manufacturer's specified anchorage position: 3 of 5
- ☒ Tested anchorage position: 3 of 5
- ☒ 15. Is the driver seat a bucket seat?
- ☒ Yes, go to 15.1 and skip 15.2.
- ☐ No, go to 15.2 and skip 15.1
- ☒ 15.1 Bucket seats - Locate and mark a vertical Plane B through the longitudinal centerline of the seat. The longitudinal centerline of a bucket seat cushion is determined at the widest part of the seat cushion. Measure perpendicular to the longitudinal centerline of the vehicle.
- ☒ Record the width of the seat: 520 mm
- ☒ Record the distance from the edge of the seat to Plane B. 260 mm
- ☐ 15.2 Bench seats (including split bench seats):
- ☐ Driver seat: Locate and mark a vertical Plane B through the center of the steering wheel parallel to the vehicle longitudinal centerline.
- ☐ Passenger seat: Locate and mark a vertical longitudinal Plane B on the seat that is the same distance from the longitudinal centerline of the vehicle as the center of the steering wheel.
- ☐ Distance from the vehicle centerline to the center of the steering wheel:
- ☐ Distance from the vehicle centerline to Plane B:
- ☒ 16. Stow outboard armrests that are capable of being stowed. (S7.4.5)
- ☒ 17. Remove the arms of a Subpart E dummy and place it in the seat such that the midsagittal plane is coincident with Plane B and the upper torso rests against the seat back. (S10.4.1.1 & S10.4.1.2)
- ☒ 18. Rest the thighs on the seat cushion

- ☒ 19. Position the H-point of the dummy within 0.5 inch of the vertical dimension and 0.5 inch of the horizontal dimension of a point 0.25 inch below the H-point determined by using the equipment and procedures specified in SAE J826 (APR 1980). (S10.4.2.1) Then measure the pelvic angle with respect to the horizontal using the pelvic angle gage. Adjust the dummy position until these three measurements are within the specifications. (S10.4.2.1 and S10.4.2.2)
- ☒ Horizontal inches from the point 0.25 below the determined H-point (0.5 inch max.) (S10.4.2.1)
 - ☒ Vertical inches from the point 0.25 below the determined H-point (0.5 inch max.) (S10.4.2.1)
 - ☒ Pelvic angle (20° to 25°)
 - ☒ Vertical inches from the point 0.25 below the determined H-point (0.5 inch max.) (S10.4.2.1)
 - ☒ Pelvic angle (20° to 25°) (S10.4.2.2)
- ☒ 20. Set the distance between the outboard knee clevis flange surfaces at 10.6 inches.
Measured distance (10.6 inches) (S10.5): 10.5
- ☒ 21. To the extent practicable keep the thighs and the legs in a vertical plane (S10.5) and rest the thighs on the seat cushion while resting the feet on the floorpan or toe board.
- ☒ 22. Fasten the seat belt around the dummy.
- ☒ 23. Remove all slack from the lap belt portion. (S10.9)
- ☒ 24. Pull the upper torso webbing out of the retractor and allow it to retract; repeat this four times. (S10.9)
- ☒ 25. Apply a 2 to 4 pound tension load to the lap belt. (S10.9)
Pound load applied: 3
- ☒ 26. Is the belt system equipped with a tension relieving device?
- ☐ ___ Yes, continue
 - ☒ ___ No, go to 27
- ☐ 26.1 Introduce the maximum amount of slack into the upper torso bet that is recommended by the vehicle manufacturer in the vehicle owner's manual. (S10.9). Go to 25.
- ☒ 27. Check the statement that applies to this test vehicle:
- ☒ 27.1 Check the statement that applies to this test vehicle:
The torso and lap belt webbing of the seat belt system automatically retracts to a stowed position when the adjacent vehicle door is in an open position and the seat belt latch plate is released.
- ☐ Pass
- 27.2 The torso and lap belt webbing of the seat belt system automatically retracts when the seat belt latch plate is released.
- ☒ Pass
- 27.3
- ☐ Neither A or B apply
 - ☐ Fail
- ☒ 28. With the webbing and hardware in the stowed position are the webbing and hardware prevented from being pinched when the door is closed?
- ☒ Yes – Pass
 - ☐ No – Fail

☒ 29. If this test vehicle has an open body (without doors) and has a belt system with a tension-relieving device, does the belt system fully retract when the tension-relieving device is deactivated?

☒ N/A
☐ Yes – Pass
☐ No – Fail

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Zuhl

Date: 1/28/04

DATA SHEET 13

SEAT BELT GUIDES AND HARDWARE (S7.4.6)

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Wayne Dahlke

NHTSA No.: C40303
 Test Date: 1/28/04

Test seat belts except those in walk-in van-type vehicles and those at front outboard designated seating positions in passenger cars. Complete a form for each applicable seat belt.

DESIGNATED SEATING POSITION:	Left Front Driver
------------------------------	-------------------

- | | | |
|----------|----|--|
| X | 1. | Is the seat cushion movable so that the seat back serves a function other than seating? (S7.4.6.1 (b)) |
| | | ☐ Yes, this form is complete |
| | | X No, go to 2 |
| X | 2. | Is the seat removable? (S7.4.6.1(b)) |
| | | ☐ Yes, this form is complete |
| | | X No, go to 3 |
| X | 3. | Is the seat movable so that the space formerly occupied by the seat can be used for a secondary function? (S7.4.6.1(b)) |
| | | ☐ Yes, this form is complete |
| | | X No, go to 4 |
| X | 4. | Is the webbing designed to pass through the seat cushion or between the seat cushion and seat back? (S7.4.6.1(a)) |
| | | ☐ Yes, go to 5 |
| | | X No, this form is complete |
| | 5. | Does one of the following three parts, the seat belt latch plate, the buckle, or the seat belt webbing, stay on top of or above the seat cushion under normal conditions (i.e., conditions other than when belt hardware is intentionally pushed behind the seat by a vehicle occupant)? (S7.4.6.1(a)) |
| | | ☐ Yes – Pass |
| | | ☐ No – Fail |
| | | Identify the part(s) on top or above the seat. |
| | | ☐ Seat belt latch plate |
| | | ☐ Buckle |
| | | ☐ Seat belt webbing |
| | 6. | Are the remaining two seat belt parts accessible under normal conditions? |
| | | ☐ Yes – Pass |
| | | ☐ No – Fail |
| | 7. | The buckle and latch plate do not pass through the guides or conduits provided and fall behind the seat when the belt is completely retracted or, if the belt is nonretractable, the belt is unlatched. (S7.4.6.2) |

- ☐ Yes – Pass
- ☐ No – Fail

☐ 8. The buckle and latch plate do not pass through the guides or conduits provided and fall behind the seat when the seat is moved to any position to which it is designed to be adjusted. (S7.4.6.2)

- ☐ Yes – Pass
- ☐ No – Fail

☐ 9. The buckle and latch plate do not pass through the guides or conduits provided and fall behind the seat back, if foldable, is folded forward as far as possible and then moved backward into position. (S7.4.6.2)

- ☐ Yes – Pass
- ☐ No – Fail

☐ 10. Is the inboard receptacle end of the seat belt assembly, installed in the front outboard designated seating position, accessible with the center armrest in any position to which it can be adjusted (without moving the armrest)? (S7.4.6.2)

- ☐ Yes – Pass
- ☐ No – Fail
- ☐ N/A – Rear seat

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Zuhl

Date: 1/28/04

DATA SHEET 13

SEAT BELT GUIDES AND HARDWARE (S7.4.6)

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Wayne Dahlke

NHTSA No.: C40303
 Test Date: 1/28/04

Test seat belts except those in walk-in van-type vehicles and those at front outboard designated seating positions in passenger cars. Complete a form for each applicable seat belt.

DESIGNATED SEATING POSITION:	Right Front Passenger
------------------------------	-----------------------

- | | | |
|--|----|--|
| <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; margin: 0 auto;">X</div> | 1. | Is the seat cushion movable so that the seat back serves a function other than seating? (S7.4.6.1 (b)) |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;"></div> Yes, this form is complete |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;">X</div> No, go to 2 |
| <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; margin: 0 auto;">X</div> | 2. | Is the seat removable? (S7.4.6.1(b)) |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;"></div> Yes, this form is complete |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;">X</div> No, go to 3 |
| <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; margin: 0 auto;">X</div> | 3. | Is the seat movable so that the space formerly occupied by the seat can be used for a secondary function? (S7.4.6.1(b)) |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;"></div> Yes, this form is complete |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;">X</div> No, go to 4 |
| <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; margin: 0 auto;">X</div> | 4. | Is the webbing designed to pass through the seat cushion or between the seat cushion and seat back? (S7.4.6.1(a)) |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;"></div> Yes, go to 5 |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;">X</div> No, this form is complete |
| <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; margin: 0 auto;"></div> | 5. | Does one of the following three parts, the seat belt latch plate, the buckle, or the seat belt webbing, stay on top of or above the seat cushion under normal conditions (i.e., conditions other than when belt hardware is intentionally pushed behind the seat by a vehicle occupant)? (S7.4.6.1(a)) |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;"></div> Yes – Pass |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;"></div> No – Fail |
| | | Identify the part(s) on top or above the seat. |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;"></div> Seat belt latch plate |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;"></div> Buckle |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;"></div> Seat belt webbing |
| <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; margin: 0 auto;"></div> | 6. | Are the remaining two seat belt parts accessible under normal conditions? |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;"></div> Yes – Pass |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;"></div> No – Fail |
| <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; margin: 0 auto;"></div> | 7. | The buckle and latch plate do not pass through the guides or conduits provided and fall behind the seat when the belt is completely retracted or, if the belt is nonretractable, the belt is unlatched. (S7.4.6.2) |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;"></div> Yes – Pass |
| | | <div style="background-color: yellow; border: 1px solid black; padding: 2px; width: 20px; display: inline-block;"></div> No – Fail |

- ☐ 8. The buckle and latch plate do not pass through the guides or conduits provided and fall behind the seat when the seat is moved to any position to which it is designed to be adjusted. (S7.4.6.2)
- ☐ Yes – Pass
- ☐ No – Fail
- ☐ 9. The buckle and latch plate do not pass through the guides or conduits provided and fall behind the seat when the seat back, if foldable, is folded forward as far as possible and then moved backward into position. (S7.4.6.2)
- ☐ Yes – Pass
- ☐ No – Fail
- ☐ 10. Is the inboard receptacle end of the seat belt assembly, installed in the front outboard designated seating position, accessible with the center armrest in any position to which it can be adjusted (without moving the armrest)? (S7.4.6.2)
- ☐ Yes – Pass
- ☐ No – Fail
- ☐ N/A – Rear seat

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Zuhl

Date: 1/28/04

DATA SHEET 13

SEAT BELT GUIDES AND HARDWARE (S7.4.6)

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Wayne Dahlke

NHTSA No.: C40303
 Test Date: 1/28/04

Test seat belts except those in walk-in van-type vehicles and those at front outboard designated seating positions in passenger cars. Complete a form for each applicable seat belt.

DESIGNATED SEATING POSITION:	Left Rear Passenger
------------------------------	---------------------

- | | | |
|---|----|--|
| <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;">X</div> | 1. | Is the seat cushion movable so that the seat back serves a function other than seating? (S7.4.6.1 (b)) |
| | | <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>Yes, this form is complete</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>No, go to 2</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px;"></div> | 2. | Is the seat removable? (S7.4.6.1(b)) |
| | | <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>Yes, this form is complete</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>No, go to 3</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px;"></div> | 3. | Is the seat movable so that the space formerly occupied by the seat can be used for a secondary function? (S7.4.6.1(b)) |
| | | <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>Yes, this form is complete</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>No, go to 4</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px;"></div> | 4. | Is the webbing designed to pass through the seat cushion or between the seat cushion and seat back? (S7.4.6.1(a)) |
| | | <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>Yes, go to 5</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>No, this form is complete</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px;"></div> | 5. | Does one of the following three parts, the seat belt latch plate, the buckle, or the seat belt webbing, stay on top of or above the seat cushion under normal conditions (i.e., conditions other than when belt hardware is intentionally pushed behind the seat by a vehicle occupant)? (S7.4.6.1(a)) |
| | | <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>Yes – Pass</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>No – Fail</div> </div> <p style="margin-left: 20px;">Identify the part(s) on top or above the seat.</p> <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>Seat belt latch plate</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>Buckle</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>Seat belt webbing</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px;"></div> | 6. | Are the remaining two seat belt parts accessible under normal conditions? |
| | | <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>Yes – Pass</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>No – Fail</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px;"></div> | 7. | The buckle and latch plate do not pass through the guides or conduits provided and fall behind the seat when the belt is completely retracted or, if the belt is nonretractable, the belt is unlatched. (S7.4.6.2) |
| | | <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>Yes – Pass</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>No – Fail</div> </div> |

- ☐ 8. The buckle and latch plate do not pass through the guides or conduits provided and fall behind the seat when the seat is moved to any position to which it is designed to be adjusted. (S7.4.6.2)
- ☐ Yes – Pass
- ☐ No – Fail
- ☐ 9. The buckle and latch plate do not pass through the guides or conduits provided and fall behind the seat when the seat back, if foldable, is folded forward as far as possible and then moved backward into position. (S7.4.6.2)
- ☐ Yes – Pass
- ☐ No – Fail
- ☐ 10. Is the inboard receptacle end of the seat belt assembly, installed in the front outboard designated seating position, accessible with the center armrest in any position to which it can be adjusted (without moving the armrest)? (S7.4.6.2)
- ☐ Yes – Pass
- ☐ No – Fail
- ☐ N/A – Rear seat

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Zuhl

Date: 1/28/04

DATA SHEET 13

SEAT BELT GUIDES AND HARDWARE (S7.4.6)

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Wayne Dahlke

NHTSA No.: C40303
 Test Date: 1/28/04

Test seat belts except those in walk-in van-type vehicles and those at front outboard designated seating positions in passenger cars. Complete a form for each applicable seat belt.

DESIGNATED SEATING POSITION:	Center Rear Passenger
------------------------------	-----------------------

- | | | | | | |
|---|----------|----|--|---|--|
| <div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> | X | 1. | Is the seat cushion movable so that the seat back serves a function other than seating? (S7.4.6.1 (b)) | <div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> X Yes, this form is complete
<div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> No, go to 2 | |
| <div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> | | 2. | Is the seat removable? (S7.4.6.1(b)) | <div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> Yes, this form is complete
<div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> No, go to 3 | |
| <div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> | | 3. | Is the seat movable so that the space formerly occupied by the seat can be used for a secondary function? (S7.4.6.1(b)) | <div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> Yes, this form is complete
<div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> No, go to 4 | |
| <div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> | | 4. | Is the webbing designed to pass through the seat cushion or between the seat cushion and seat back? (S7.4.6.1(a)) | <div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> Yes, go to 5
<div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> No, this form is complete | |
| <div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> | | 5. | Does one of the following three parts, the seat belt latch plate, the buckle, or the seat belt webbing, stay on top of or above the seat cushion under normal conditions (i.e., conditions other than when belt hardware is intentionally pushed behind the seat by a vehicle occupant)? (S7.4.6.1(a)) | <div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> Yes – Pass
<div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> No – Fail
Identify the part(s) on top or above the seat.
<div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> Seat belt latch plate
<div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> Buckle
<div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> Seat belt webbing | |
| <div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> | | 6. | Are the remaining two seat belt parts accessible under normal conditions? | <div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> Yes – Pass
<div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> No – Fail | |
| <div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> | | 7. | The buckle and latch plate do not pass through the guides or conduits provided and fall behind the seat when the belt is completely retracted or, if the belt is nonretractable, the belt is unlatched. (S7.4.6.2) | <div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> Yes – Pass
<div style="background-color: yellow; width: 20px; height: 20px; display: inline-block;"></div> No – Fail | |

- ☐ 8. The buckle and latch plate do not pass through the guides or conduits provided and fall behind the seat when the seat is moved to any position to which it is designed to be adjusted. (S7.4.6.2)
- ☐ Yes – Pass
- ☐ No – Fail
- ☐ 9. The buckle and latch plate do not pass through the guides or conduits provided and fall behind the seat when the seat back, if foldable, is folded forward as far as possible and then moved backward into position. (S7.4.6.2)
- ☐ Yes – Pass
- ☐ No – Fail
- ☐ 10. Is the inboard receptacle end of the seat belt assembly, installed in the front outboard designated seating position, accessible with the center armrest in any position to which it can be adjusted (without moving the armrest)? (S7.4.6.2)
- ☐ Yes – Pass
- ☐ No – Fail
- ☐ N/A – Rear seat

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Zuhl

Date: 1/28/04

DATA SHEET 13

SEAT BELT GUIDES AND HARDWARE (S7.4.6)

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Wayne Dahlke

NHTSA No.: C40303
 Test Date: 1/28/04

Test seat belts except those in walk-in van-type vehicles and those at front outboard designated seating positions in passenger cars. Complete a form for each applicable seat belt.

DESIGNATED SEATING POSITION:	Right Rear Passenger
------------------------------	----------------------

- | | | |
|---|----|--|
| <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;">X</div> | 1. | Is the seat cushion movable so that the seat back serves a function other than seating? (S7.4.6.1 (b)) |
| | | <div style="display: flex; margin-bottom: 5px;"> <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;">X</div> <div style="margin-left: 5px;">Yes, this form is complete</div> </div> <div style="display: flex;"> <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;"></div> <div style="margin-left: 5px;">No, go to 2</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;"></div> | 2. | Is the seat removable? (S7.4.6.1(b)) |
| | | <div style="display: flex; margin-bottom: 5px;"> <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;"></div> <div style="margin-left: 5px;">Yes, this form is complete</div> </div> <div style="display: flex;"> <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;"></div> <div style="margin-left: 5px;">No, go to 3</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;"></div> | 3. | Is the seat movable so that the space formerly occupied by the seat can be used for a secondary function? (S7.4.6.1(b)) |
| | | <div style="display: flex; margin-bottom: 5px;"> <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;"></div> <div style="margin-left: 5px;">Yes, this form is complete</div> </div> <div style="display: flex;"> <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;"></div> <div style="margin-left: 5px;">No, go to 4</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;"></div> | 4. | Is the webbing designed to pass through the seat cushion or between the seat cushion and seat back? (S7.4.6.1(a)) |
| | | <div style="display: flex; margin-bottom: 5px;"> <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;"></div> <div style="margin-left: 5px;">Yes, go to 5</div> </div> <div style="display: flex;"> <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;"></div> <div style="margin-left: 5px;">No, this form is complete</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;"></div> | 5. | Does one of the following three parts, the seat belt latch plate, the buckle, or the seat belt webbing, stay on top of or above the seat cushion under normal conditions (i.e., conditions other than when belt hardware is intentionally pushed behind the seat by a vehicle occupant)? (S7.4.6.1(a)) |
| | | <div style="display: flex; margin-bottom: 5px;"> <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;"></div> <div style="margin-left: 5px;">Yes – Pass</div> </div> <div style="display: flex; margin-bottom: 5px;"> <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;"></div> <div style="margin-left: 5px;">No – Fail</div> </div> <div style="padding-left: 20px;">Identify the part(s) on top or above the seat.</div> <div style="display: flex; margin-bottom: 5px;"> <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;"></div> <div style="margin-left: 5px;">Seat belt latch plate</div> </div> <div style="display: flex; margin-bottom: 5px;"> <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;"></div> <div style="margin-left: 5px;">Buckle</div> </div> <div style="display: flex;"> <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;"></div> <div style="margin-left: 5px;">Seat belt webbing</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;"></div> | 6. | Are the remaining two seat belt parts accessible under normal conditions? |
| | | <div style="display: flex; margin-bottom: 5px;"> <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;"></div> <div style="margin-left: 5px;">Yes – Pass</div> </div> <div style="display: flex;"> <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;"></div> <div style="margin-left: 5px;">No – Fail</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;"></div> | 7. | The buckle and latch plate do not pass through the guides or conduits provided and fall behind the seat when the belt is completely retracted or, if the belt is nonretractable, the belt is unlatched. (S7.4.6.2) |

- | | | |
|--------------------------|--------------------------|---|
| | ☐ | Yes – Pass |
| | ☐ | No – Fail |
| ☐ | 8. | The buckle and latch plate do not pass through the guides or conduits provided and fall behind the seat when the seat is moved to any position to which it is designed to be adjusted. (S7.4.6.2) |
| | ☐ | Yes – Pass |
| | ☐ | No – Fail |
| ☐ | 9. | The buckle and latch plate do not pass through the guides or conduits provided and fall behind the seat back, if foldable, is folded forward as far as possible and then moved backward into position. (S7.4.6.2) |
| | ☐ | Yes – Pass |
| | ☐ | No – Fail |
| ☐ | 10. | Is the inboard receptacle end of the seat belt assembly, installed in the front outboard designated seating position, accessible with the center armrest in any position to which it can be adjusted (without moving the armrest)? (S7.4.6.2) |
| | ☐ | Yes – Pass |
| | ☐ | No – Fail |
| | ☐ | N/A – Rear seat |

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Zuhl

Date: 1/28/04

DATA SHEET 13

SEAT BELT GUIDES AND HARDWARE (S7.4.6)

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Wayne Dahlke

NHTSA No.: C40303
 Test Date: 1/28/04

Test seat belts except those in walk-in van-type vehicles and those at front outboard designated seating positions in passenger cars. Complete a form for each applicable seat belt.

DESIGNATED SEATING POSITION:	Left Third Row Passenger
------------------------------	--------------------------

- | | | |
|---|----|--|
| <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;">X</div> | 1. | Is the seat cushion movable so that the seat back serves a function other than seating? (S7.4.6.1 (b)) |
| | | <div style="display: flex; align-items: flex-start;"> <div style="width: 20px; height: 20px; background-color: yellow; margin-right: 5px;"></div> <div>Yes, this form is complete</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="width: 20px; height: 20px; background-color: yellow; margin-right: 5px;"></div> <div>No, go to 2</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px;"></div> | 2. | Is the seat removable? (S7.4.6.1(b)) |
| | | <div style="display: flex; align-items: flex-start;"> <div style="width: 20px; height: 20px; background-color: yellow; margin-right: 5px;"></div> <div>Yes, this form is complete</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="width: 20px; height: 20px; background-color: yellow; margin-right: 5px;"></div> <div>No, go to 3</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px;"></div> | 3. | Is the seat movable so that the space formerly occupied by the seat can be used for a secondary function? (S7.4.6.1(b)) |
| | | <div style="display: flex; align-items: flex-start;"> <div style="width: 20px; height: 20px; background-color: yellow; margin-right: 5px;"></div> <div>Yes, this form is complete</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="width: 20px; height: 20px; background-color: yellow; margin-right: 5px;"></div> <div>No, go to 4</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px;"></div> | 4. | Is the webbing designed to pass through the seat cushion or between the seat cushion and seat back? (S7.4.6.1(a)) |
| | | <div style="display: flex; align-items: flex-start;"> <div style="width: 20px; height: 20px; background-color: yellow; margin-right: 5px;"></div> <div>Yes, go to 5</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="width: 20px; height: 20px; background-color: yellow; margin-right: 5px;"></div> <div>No, this form is complete</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px;"></div> | 5. | Does one of the following three parts, the seat belt latch plate, the buckle, or the seat belt webbing, stay on top of or above the seat cushion under normal conditions (i.e., conditions other than when belt hardware is intentionally pushed behind the seat by a vehicle occupant)? (S7.4.6.1(a)) |
| | | <div style="display: flex; align-items: flex-start;"> <div style="width: 20px; height: 20px; background-color: yellow; margin-right: 5px;"></div> <div>Yes – Pass</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="width: 20px; height: 20px; background-color: yellow; margin-right: 5px;"></div> <div>No – Fail</div> </div> <p style="margin-left: 20px;">Identify the part(s) on top or above the seat.</p> <div style="display: flex; align-items: flex-start;"> <div style="width: 20px; height: 20px; background-color: yellow; margin-right: 5px;"></div> <div>Seat belt latch plate</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="width: 20px; height: 20px; background-color: yellow; margin-right: 5px;"></div> <div>Buckle</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="width: 20px; height: 20px; background-color: yellow; margin-right: 5px;"></div> <div>Seat belt webbing</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px;"></div> | 6. | Are the remaining two seat belt parts accessible under normal conditions? |
| | | <div style="display: flex; align-items: flex-start;"> <div style="width: 20px; height: 20px; background-color: yellow; margin-right: 5px;"></div> <div>Yes – Pass</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="width: 20px; height: 20px; background-color: yellow; margin-right: 5px;"></div> <div>No – Fail</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px;"></div> | 7. | The buckle and latch plate do not pass through the guides or conduits provided and fall behind the seat when the belt is completely retracted or, if the belt is nonretractable, the belt is unlatched. (S7.4.6.2) |
| | | <div style="display: flex; align-items: flex-start;"> <div style="width: 20px; height: 20px; background-color: yellow; margin-right: 5px;"></div> <div>Yes – Pass</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="width: 20px; height: 20px; background-color: yellow; margin-right: 5px;"></div> <div>No – Fail</div> </div> |

- ☐ 8. The buckle and latch plate do not pass through the guides or conduits provided and fall behind the seat when the seat is moved to any position to which it is designed to be adjusted. (S7.4.6.2)
- ☐ Yes – Pass
- ☐ No – Fail
- ☐ 9. The buckle and latch plate do not pass through the guides or conduits provided and fall behind the seat when the seat back, if foldable, is folded forward as far as possible and then moved backward into position. (S7.4.6.2)
- ☐ Yes – Pass
- ☐ No – Fail
- ☐ 10. Is the inboard receptacle end of the seat belt assembly, installed in the front outboard designated seating position, accessible with the center armrest in any position to which it can be adjusted (without moving the armrest)? (S7.4.6.2)
- ☐ Yes – Pass
- ☐ No – Fail
- ☐ N/A – Rear seat

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Zuhl

Date: 1/28/04

DATA SHEET 13

SEAT BELT GUIDES AND HARDWARE (S7.4.6)

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Wayne Dahlke

NHTSA No.: C40303
 Test Date: 1/28/04

Test seat belts except those in walk-in van-type vehicles and those at front outboard designated seating positions in passenger cars. Complete a form for each applicable seat belt.

DESIGNATED SEATING POSITION:	Right Third Row Passenger
------------------------------	---------------------------

- | | | |
|---|----|--|
| <div style="background-color: yellow; width: 20px; height: 20px; display: flex; align-items: center; justify-content: center;">X</div> | 1. | Is the seat cushion movable so that the seat back serves a function other than seating? (S7.4.6.1 (b)) |
| | | <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>Yes, this form is complete</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>No, go to 2</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px;"></div> | 2. | Is the seat removable? (S7.4.6.1(b)) |
| | | <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>Yes, this form is complete</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>No, go to 3</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px;"></div> | 3. | Is the seat movable so that the space formerly occupied by the seat can be used for a secondary function? (S7.4.6.1(b)) |
| | | <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>Yes, this form is complete</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>No, go to 4</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px;"></div> | 4. | Is the webbing designed to pass through the seat cushion or between the seat cushion and seat back? (S7.4.6.1(a)) |
| | | <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>Yes, go to 5</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>No, this form is complete</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px;"></div> | 5. | Does one of the following three parts, the seat belt latch plate, the buckle, or the seat belt webbing, stay on top of or above the seat cushion under normal conditions (i.e., conditions other than when belt hardware is intentionally pushed behind the seat by a vehicle occupant)? (S7.4.6.1(a)) |
| | | <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>Yes – Pass</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>No – Fail</div> </div> <p style="margin-left: 20px;">Identify the part(s) on top or above the seat.</p> <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>Seat belt latch plate</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>Buckle</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>Seat belt webbing</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px;"></div> | 6. | Are the remaining two seat belt parts accessible under normal conditions? |
| | | <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>Yes – Pass</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>No – Fail</div> </div> |
| <div style="background-color: yellow; width: 20px; height: 20px;"></div> | 7. | The buckle and latch plate do not pass through the guides or conduits provided and fall behind the seat when the belt is completely retracted or, if the belt is nonretractable, the belt is unlatched. (S7.4.6.2) |
| | | <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>Yes – Pass</div> </div> <div style="display: flex; align-items: flex-start;"> <div style="background-color: yellow; width: 20px; height: 20px; margin-right: 5px;"></div> <div>No – Fail</div> </div> |

- ☐ 8. The buckle and latch plate do not pass through the guides or conduits provided and fall behind the seat when the seat is moved to any position to which it is designed to be adjusted. (S7.4.6.2)
- ☐ Yes – Pass
- ☐ No – Fail
- ☐ 9. The buckle and latch plate do not pass through the guides or conduits provided and fall behind the seat when the seat back, if foldable, is folded forward as far as possible and then moved backward into position. (S7.4.6.2)
- ☐ Yes – Pass
- ☐ No – Fail
- ☐ 10. Is the inboard receptacle end of the seat belt assembly, installed in the front outboard designated seating position, accessible with the center armrest in any position to which it can be adjusted (without moving the armrest)? (S7.4.6.2)
- ☐ Yes – Pass
- ☐ No – Fail
- ☐ N/A – Rear seat

REMARKS:

I certify that I have read and performed each instruction.

Signature: Wayne Zuhl

Date: 1/28/04

DATA SHEET 14

MARKING OF REFERENCE POINTS FOR VARIOUS TEST POSITIONS AND POINTS

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Eric Peschman

NHTSA No.: C40303
 Test Date: 4/1/04

1. Driver Designated Seating Position:

- | | | |
|----------|------|--|
| X | 1.1 | Position the seat's adjustable lumbar supports so that the lumbar supports are in the lowest, retracted or deflated adjustment positions. (S16.2.10.1) |
| | | N/A – No lumbar adjustment |
| X | 1.2 | Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position (S16.2.10.2) |
| | | X N/A – No additional support adjustment |
| X | 1.3 | Mark a point (seat cushion reference point) on the side of the seat cushion that is between 150 mm and 250 mm from the front edge of the seat cushion. |
| X | 1.4 | Draw a line (seat cushion reference line) through the seat cushion reference point. |
| X | 1.5 | Using only the controls that primarily move the seat in the fore-aft direction, move the seat cushion reference point to the rearmost position. |
| X | 1.6 | If the seat cushion adjusts fore-aft, independent of the seat back, use only the controls that primarily move the seat cushion in the fore-aft direction to move the seat cushion reference point to the rearmost position (S16.2.10.3) |
| | | X N/A – No independent fore-aft seat cushion adjustment |
| X | 1.7 | Using any part of any control, other than the parts just used for fore-aft positioning, determine the range of angles of the seat cushion reference line and set the seat cushion reference line at the mid-angle. |
| X | | Maximum Angle: (Fwd Up) 3.6 Degrees |
| X | | Minimum Angle: (Fwd Down) 7.7 Degrees |
| X | | Mid-angle: (Fwd Down) 2.0 Degrees |
| X | 1.8 | If the seat and/or seat cushion height is adjustable, use any part of any control other than those which primarily move the seat or seat cushion fore-aft, to put the seat cushion reference point in its lowest position with the seat cushion reference line angle at the mid-angle found in 1.7. |
| | | N/A – No seat height adjustment |
| X | 1.9 | Using only the controls that primarily move the seat in the fore-aft direction, verify the seat is in the rearmost position. |
| X | 1.10 | Using only the controls that primarily move the seat in the fore-aft direction, mark for future reference the fore-aft seat positions. Mark each position so that there is a visual indication when the seat is at a particular position. For manual seats, move the seat forward one detent at a time and mark each detent. For power seats, mark only the rearmost, middle, and foremost positions. Label three of the positions with the following: F for foremost, M for mid-position (if there is no mid-position, label the closest adjustment position to the rear of the mid-point), and R for rearmost. |
| X | 1.11 | Use only the controls that primarily move the seat in the fore-aft direction to place the seat in the rearmost position. |

- ☒ 1.12 Using any controls, other than the controls that primarily move the seat and/or seat cushion in the fore-aft direction, find and visually mark for future reference the maximum, minimum, and middle height of the seat cushion reference point with the seat cushion reference line at the mid-angle determined in 1.7.
- ☒ 1.13 Using only the controls that primarily move the seat and/or seat cushion in the fore-aft direction, place the seat in the mid-fore-aft position.
- ☒ 1.14 Using any controls, other than the controls that primarily move the seat in the fore-aft direction, find and visually mark for future reference the maximum, minimum, and middle height of the seat cushion reference point with the seat cushion reference line at the mid-angle determined in 1.7.
- ☒ 1.15 Using only the controls that change the seat in the fore-aft direction, place the seat in the foremost position.
- ☒ 1.16 Using any controls, other than the controls that primarily move the seat in the fore-aft direction, find and visually mark for future reference the maximum, minimum, and middle height of the seat cushion reference point with the seat cushion reference line at the mid-angle determined in 1.7.
- ☒ 1.17 Visually mark for future reference the seat back angle, if adjustable, at the manufacturer's nominal design riding position for a 50th percentile adult male in the manner specified by the manufacturer.
- ☐ N/A – No seat back angle adjustment
- ☒ Manufacturer's design seat back angle: 12
- ☒ 1.18 Is the seat a bucket seat?
- ☒ Yes, go to 1.18.1 and skip 1.18.2
- ☐ No, go to 1.18.2 and skip 1.18.1
- 1.18.1 Bucket seats:
- ☒ Locate and mark for future reference the longitudinal centerline of the seat cushion. The longitudinal centerline of a bucket seat cushion is determined at the widest part of the seat cushion. Measure perpendicular to the longitudinal centerline of the vehicle. (S16.3.1.10)
- ☒ Record the width of the seat cushion: 520 mm
- ☒ One half the width of the seat cushion is: 260 mm
- ☒ Record the distance from the edge of the seat cushion to the seat mark: 200 mm
- 1.18.2 Bench seats:
- ☐ Locate and mark for future reference the longitudinal line on the seat cushion that marks the longitudinal vertical plane through the centerline of the steering wheel.
2. Passenger Designated Seating Position
- ☒ 2.1 Is the seat adjustable independent of the driver seating position?
- ☒ Yes, go to 2.2
- ☐ No, go to 2.18
- ☒ 2.2 Position the seat's adjustable lumbar supports so that the lumbar supports are in the lowest, retracted or deflated adjustment positions (S16.2.10.1, S20.1.9.1, S22.1.7.1)
- ☐ N/A – No lumbar adjustment
- ☒ 2.3 Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2, S20.1.9.2, S22.1.7.2)

	X	N/A – No additional support adjustment
X	2.4	Mark a point (seat cushion reference point) on the side of the seat cushion that is between 150 mm and 250 mm from the front edge of the seat cushion.
X	2.5	Draw a line (seat cushion reference line) through the seat cushion reference point.
X	2.6	Using only the controls that primarily move the seat in the fore-aft direction, move the seat cushion reference point to the rearmost position.
X	2.7	If the seat cushion adjusts fore-aft, independent of the seat back, use only the controls that primarily move the seat cushion in the fore-aft direction to move the seat cushion reference point to the rearmost position (S16.2.10.3, S20.1.9.3, S22.1.7.3)
	X	N/A – No independent fore-aft seat cushion adjustment.
X	2.8	Using any part of the control, other than the parts just used for fore-aft positioning, determine the range of angles of the seat cushion reference line and set the seat cushion reference line at the mid-angle.
X		Maximum Angle: Zero Degrees
X		Minimum Angle: Zero Degrees
X		Mid-angle: Zero Degrees
X	2.9	If the seat and/or seat cushion height is adjustable, use any part of any control other than those which primarily move the seat or seat cushion fore-aft, to put the seat cushion reference point in its lowest position with the seat cushion reference line angle at the mid-range angle.
	X	N/A – No seat height adjustment
X	2.10	Using only the controls that primarily move the seat and/or seat cushion in the fore-aft direction, verify the seat is in the rearmost position.
X	2.11	Using only the controls that primarily move the seat in the fore-aft direction, mark for future reference the fore-aft seat positions. Mark each position so that there is a visual indication when the seat is at a particular position. For manual seats, move the seat forward one detent at a time and mark each detent. For power seats, mark only the rearmost, middle, and foremost positions. Label three of the positions with the following: F for foremost, M for mid-position (if there is no mid-position, label the closest adjustment position to the rear of the mid-point), and R for rearmost.
X	2.12	Using only the controls that primarily move the seat in the fore-aft direction, place the seat in the rearmost position.
X	2.13	Using any controls, other than the controls that primarily move the seat in the fore-aft direction, find and visually mark for future reference the maximum, minimum, and middle height of the seat cushion reference point with the seat cushion reference line at the mid-angle determined in 2.8.
	X	N/A – No seat height adjustment Go to 2.18
	2.14	Using only the controls that primarily move the seat in the fore-aft direction, place the seat in the mid-fore-aft position.
	2.15	Using any controls, other than the controls that primarily move the seat in the fore-aft direction, find and visually mark for future reference the maximum, minimum, and middle height of the seat cushion reference point with the seat cushion reference line at the mid-angle determined in 2.8.
	2.16	Using only the controls that change the seat in the fore-aft direction, place the seat in the foremost position.

☐	2.17	Using any controls, other than the controls that primarily move the seat in the fore-aft direction, find and visually mark for future reference the maximum, minimum, and middle height of the seat cushion reference point with the seat cushion reference line at the mid-angle determined in 2.8.
☒	2.18	Visually mark for future reference the seat back angle, if adjustable, at the manufacturer's nominal design riding position for a 50 th percentile adult male in the manner specified by the manufacturer.
☐		N/A – No seat back angle adjustment
☐		N/A – The seat back angle adjustment is controlled by the setting of the driver seat back angle.
☒		Manufacturer's design seat back angle: 12
☒		Actual seat back angle: 12
☒	2.19	Is the seat a bucket seat?
☒		Yes, go to 2.19.1 and skip 2.19.2
☐		No, go to 2.19.2 and skip 2.19.1
		2.19.1 Bucket seats:
☒		Locate and mark for future reference the longitudinal centerline of the seat cushion. (S20.2.1.3, S22.2.1.3) The longitudinal centerline of a bucket seat cushion is determined at the widest part of the seat cushion. Measure perpendicular to the longitudinal centerline of the vehicle. (S20.1.10)
☒		Record the width of the seat cushion: 520 mm
☒		One half the width of the seat cushion is: 260 mm
☒		Record the distance from the edge of the seat cushion to the longitudinal centerline of the seat cushion. (The vertical plane through this longitudinal centerline is Plane B for suppression.) 200 mm
		2.19.2 Bench seats:
☐		Locate and mark for future reference the longitudinal centerline of the passenger seat cushion. The longitudinal centerline is the same distance from the longitudinal centerline of the vehicle as the center of the steering wheel. (S20.2.1.3, S22.2.1.3)
☐		Record the distance from the longitudinal centerline of the vehicle to the center of the steering wheel:
☐		Record the distance from the longitudinal centerline of the vehicle to the longitudinal centerline of the seat cushion. (The vertical plane through this longitudinal centerline is Plane B for suppression.)
☒	3.	Head Restraints
☐		N/A, vehicle contains automatic head restraints
☒		N/A, there is no head restraint adjustment
☐	3.1	Left outboard
☐	3.1.1	Adjust the head restraint to its lowest position. (S16.3.4.2)
☐	3.1.2	Any adjustment of the head restraint shall be used to position it full forward. For example, if it rotates, rotate it such that the head restraint extends as far forward as possible. Mark the foremost position.
☐	3.1.3	Measure the vertical distance from the top most point of the head restraint to the bottom most point. Locate and mark a horizontal plane through the midpoint of this distance.

☐		Vertical height of head restraint (mm): 180
☐		Mid-point height (mm): 90
☐	3.2	Right outboard
☐	3.2.1	Adjust the head restraint to its lowest position. (S16.3.4.2)
☐	3.2.2	Any adjustment of the head restraint shall be used to position it full forward. For example, if it rotates, rotate it such that the head restraint extends as far forward as possible. Mark the foremost position.
☐	3.2.3	Measure the vertical distance from the top most point of the head restraint to the bottom most point. Locate and mark a horizontal plane through the midpoint of this distance.
☐		Vertical height of head restraint (mm): 180
☐		Mid-point height (mm): 90
☒	4.	Steering Wheel
☒	4.1	Is the steering wheel adjustable up and down and/or in and out?
☒		Yes, go to 4.2
☐		No, this form is complete
☒	4.2	Find and mark for future reference each up and down position. Label three of the positions with the following: H for highest, M for mid-position (if there is no mid-position, label the next lowest adjustment position), and L for lowest.
☐		N/A, steering wheel is not adjustable up and down
☒	4.3	Find and mark for future references each in and out position. Label three of the positions with the following: F for foremost, M for mid-position (if there is no mid-position, label the next rearmost adjustment position), and R for rearmost.
☒		N/A, steering wheel is not adjustable in and out
☒	5.	Driver Low Risk Deployment
☐		N/A, no low risk deployment tests scheduled
☒	5.1	Position the steering wheel so the front wheels are in the straight-ahead position. (S26.2.1)
☒	5.2	Position any adjustable parts of the steering controls to the mid-position as determined in item 3 above. If a mid-position adjustment is not achievable, position the controls to the next lowest detent position. (S26.2.1)
☒	5.3	Locate the vertical plane parallel to the vehicle longitudinal centerline through the geometric center of the opening through which the driver air bag deploys into the occupant compartment. This is referred to as "Plane E". (Check determination method below.) (S26.2.6)
☒		Plane E determined using manufacturer's information supplied by the COTR. (Found in Appendix D on pages D-94 and D-95) OR
☐		Plane E determined by test lab personnel and approved by the COTR. (Include supporting documentation in the test report.)

	Ey (mm)
"Plane E" Measurement::	
Measured:	
Specified:	
Verify Measured Equals Specified +/- 6mm:	

☒	5.4	Locate the horizontal plane through the highest point of the air bag module cover. This is referred to as "Plane F." (Check determination method below.) (S26.2.6)
-------------------------------------	-----	--

- ☒ Plane F determined using manufacturer's information supplied by the COTR .
(Found in Appendix D on pages D-94 and D-95) OR
- ☐ Plane F determined by test lab personnel and approved by the COTR.
(Include supporting documentation in the test report.)

	Fz (mm)
"Plane F" Measurement::	
Measured:	
Specified:	
Verify Measured Equals Specified +/- 6mm:	

- ☒ 6. Passenger Low Risk Deployment – Planes C and D

☐ N/A, no low risk deployment tests scheduled

- ☒ 6.1 Locate the horizontal plane through the geometric center of the opening through which the right front air bag deploys into the occupant compartment. This is referred to as "Plane C." (Check location method below.) (S22.4.1.3)

- ☒ Plane C located using manufacturer's information supplied by the COTR.
(Found in Appendix D on pages D-94 and D-95) OR
- ☐ Plane C located by test lab personnel and approved by the COTR.
(Include supporting documentation in the test report.)

	Cz (mm)
"Plane C" Measurement::	
Measured:	
Specified:	
Verify Measured Equals Specified +/- 6mm:	

- ☒ 6.2 Locate the vertical plane parallel to the vehicle longitudinal centerline through the geometric center of the opening through which the right front air bag deploys into the occupant compartment. This is referred to as "Plane D." (Check determination method below.) (S22.4.1.2)

- ☒ Plane D determined using manufacturer's information supplied by the COTR.
(Found in Appendix D on pages D-94 and D-95) OR
- ☐ Plane D determined by test lab personnel and approved by the COTR.
(Include supporting documentation in the test report.)

	Dy (mm)
"Plane D" Measurement:	
Measured:	
Specified:	
Verify Measured Equals Specified +/- 6mm:	

- ☐ 6.3 **Mark** the intersection of Planes C and D on the instrument panel.

- ☒ 7. 5th Female Dummy
Mark a point on the chin of the dummy 40 mm below the center of the mouth. (Chin Point) (S26.2.6)

- ☒ 8. 6-Year-Old Dummy
Locate and **mark** a point on the front of the dummy's chest jacket on the midsagittal plane which is 139 mm (5.5 in) $\pm$ 3 mm ($\pm$ 0.1 in) along the surface of the skin down from the top of the skin at the neck line. Designate this point as "Point 1." (S24.4.1.1)

- ☒ "Point 1" measurement (mm): 139

X

9. 3-Year-Old Dummy

Locate and **mark** a point on the front of the dummy's chest jacket on the midsagittal plane which is 114 mm (4.5 in) $\pm$ 3 mm ($\pm$ 0.1 in) along the surface of the skin down from the top of the skin at the neck line. Designate this point as "Point 1." (S22.4.1.1)

X

"Point 1" measurement (mm $\pm$ 3 mm): 114

REMARKS:

I certify that I have read and performed each instruction.

Signature:

Eiv Leander

Date: 4/1/04

DATA SHEET 15 SUMMARY

Suppression Test Using 12-month-old CRABI Dummy (Part 572, Subpart R)
Section B Rear Facing CRS

NHTSA No.:	C40303	TEST DATE:	1-26-04
LABORATORY:	MGA	TECHNICIANS:	JL/TB
DUMMY TYPE:	12 Month Old	DUMMY SERIAL NO.:	082

CHILD RESTRAINT NAME:	Britax
CHILD RESTRAINT MODEL:	Handle With Care 191
DATE OF MANUFACTURE:	5-26-2000

Base: __On __Off X N/A-Restraint does not have a removable base

Manufacturer's design seat back angle: 12.0°
Tested seat back angle: 12.2°
Manufacturer's specified anchorage position: 2nd Down
Tested anchorage position: 2nd Down
(Four positions, Uppermost as 1)

Blanket and visor combinations were not used

Test Summary

Seat Belt	Seat Slide	Cinch Load (N)	Handle Down	Handle Up
Belted Rear Facing	Forward	133	Suppressed	N/A
	Middle	130	Suppressed	N/A
	Rearward	127	Suppressed	N/A
Unbelted Rear Facing	Forward	N/A	Suppressed	N/A
	Middle	N/A	Suppressed	N/A
	Rearward	N/A	Suppressed	N/A
Unbelted Forward Facing	Forward	N/A	Suppressed	N/A
	Middle	N/A	Suppressed	N/A
	Rearward	N/A	Suppressed	N/A

Successful Unbelted 5th percentile Female Dummy Reactivation was performed with the seat in the Rearward position. (SN513)

DATA SHEET 15 SUMMARY

Suppression Test Using 12-month-old CRABI Dummy (Part 572, Subpart R)
Section B Rear Facing CRS

NHTSA No.:	C40303	TEST DATE:	1-26-04
LABORATORY:	MGA	TECHNICIANS:	JL/TB
DUMMY TYPE:	12 Month Old	DUMMY SERIAL NO.:	082

CHILD RESTRAINT NAME:	Evenflo
CHILD RESTRAINT MODEL:	First Choice 204
DATE OF MANUFACTURE:	6-20-2000

Base: __On __Off X N/A-Restraint does not have a removable base

Manufacturer's design seat back angle: 12.0°
 Tested seat back angle: 12.0°
 Manufacturer's specified anchorage position: 2nd Down
 Tested anchorage position: 2nd Down
 (Four positions, Uppermost as 1)

Blanket and visor combinations were not used

Test Summary

Seat Belt	Seat Slide	Cinch Load (N)	Handle Down	Handle Up
Belted Rear Facing	Forward	127	N/A	Suppressed
	Middle	127	Suppressed	N/A
	Rearward	130	Suppressed	N/A
Unbelted Rear Facing	Forward	N/A	N/A	Suppressed
	Middle	N/A	N/A	Suppressed
	Rearward	N/A	Suppressed	N/A
Unbelted Forward Facing	Forward 8 *	N/A	N/A	Suppressed
	Middle	N/A	N/A	Suppressed
	Rearward	N/A	N/A	Suppressed

Successful Unbelted 5th percentile Female Dummy Reactivation was performed with the seat in the Middle position. (SN513)

* The CRS would not fit in this Forward Seat Slide position. If there is a number in the Seat Slide column, it indicates the fore-aft detent position with respect to the foremost position. (1 = Full Forward; 51 = Full Rearward; 51 total Seat Slide detents)

DATA SHEET 15 SUMMARY

Suppression Test Using 12-month-old CRABI Dummy (Part 572, Subpart R)
Section B Rear Facing CRS

NHTSA No.:	C40303	TEST DATE:	1-26-04
LABORATORY:	MGA	TECHNICIANS:	JL/TB
DUMMY TYPE:	12 Month Old	DUMMY SERIAL NO.:	082

CHILD RESTRAINT NAME:	Graco
CHILD RESTRAINT MODEL:	Infant 8457
DATE OF MANUFACTURE:	8-31-2000

Base: ☒ On ☐ Off ☐ N/A-Restraint does not have a removable base

Manufacturer's design seat back angle: 12.0°
 Tested seat back angle: 12.2°
 Manufacturer's specified anchorage position: 2nd Down
 Tested anchorage position: 2nd Down
 (Four positions, Uppermost as 1)

Blanket and visor combinations were not used

Test Summary

Seat Belt	Seat Slide	Cinch Load (N)	Handle Down	Handle Up
Belted Rear Facing	Forward	133	N/A	Suppressed
	Middle	130	Suppressed	N/A
	Rearward	132	Suppressed	N/A
Unbelted Rear Facing	Forward	N/A	N/A	Suppressed
	Middle	N/A	Suppressed	N/A
	Rearward	N/A	Suppressed	N/A
Unbelted Forward Facing	Forward	N/A	N/A	Suppressed
	Middle	N/A	N/A	Suppressed
	Rearward	N/A	N/A	Suppressed

DATA SHEET 15 SUMMARY

Suppression Test Using 12-month-old CRABI Dummy (Part 572, Subpart R)
Section B Rear Facing CRS

NHTSA No.:	C40303	TEST DATE:	1-26-04
LABORATORY:	MGA	TECHNICIANS:	JL/TB
DUMMY TYPE:	12 Month Old	DUMMY SERIAL NO.:	082

CHILD RESTRAINT NAME:	Graco
CHILD RESTRAINT MODEL:	Infant 8457
DATE OF MANUFACTURE:	8-31-2000

Base: ☐ On ☒ Off ☐ N/A-Restraint does not have a removable base

Manufacturer's design seat back angle: 12.0°
 Tested seat back angle: 12.2°
 Manufacturer's specified anchorage position: 2nd Down
 Tested anchorage position: 2nd Down
 (Four positions, Uppermost as 1)

Blanket and visor combinations were not used

Test Summary

Seat Belt	Seat Slide	Cinch Load (N)	Handle Down	Handle Up
Belted Rear Facing	Forward 10 *	130	N/A	Suppressed
	Middle	131	Suppressed	N/A
	Rearward	133	Suppressed	N/A
Unbelted Rear Facing	Forward 10 *	N/A	N/A	Suppressed
	Middle	N/A	Suppressed	N/A
	Rearward	N/A	Suppressed	N/A
Unbelted Forward Facing	Forward	N/A	N/A	Suppressed
	Middle	N/A	N/A	Suppressed
	Rearward	N/A	N/A	Suppressed

Successful Unbelted 5th percentile Female Dummy Reactivation was performed with the seat in the Rearward position. (SN513)

* The CRS would not fit in this Forward Seat Slide position. If there is a number in the Seat Slide column, it indicates the fore-aft detent position with respect to the foremost position. (1 = Full Forward; 51 = Full Rearward; 51 total Seat Slide detents)

DATA SHEET 15 SUMMARY

Suppression Test Using 12-month-old CRABI Dummy (Part 572, Subpart R)
Section C Forward Facing Convertible CRS

NHTSA No.:	C40303	TEST DATE:	1-26-04
LABORATORY:	MGA	TECHNICIANS:	JL/TB
DUMMY TYPE:	12 Month Old	DUMMY SERIAL NO.:	082

CHILD RESTRAINT NAME:	Britax
CHILD RESTRAINT MODEL:	Roundabout 161
DATE OF MANUFACTURE:	7-21-2000

Base: __On __Off X N/A-Restraint does not have a removable base

Manufacturer's design seat back angle: 12.0°
 Tested seat back angle: 12.2°
 Manufacturer's specified anchorage position: 2nd Down
 Tested anchorage position: 2nd Down
 (Four positions, Uppermost as 1)

Blanket combinations were not used

Test Summary

Seat Belt	Seat Slide	Cinch Load (N)	No Blanket
Belted Forward Facing	Forward	130	Suppressed
	Middle	131	Suppressed
	Rearward	132	Suppressed
Unbelted Forward Facing	Forward	N/A	Suppressed
	Middle	N/A	Suppressed
	Rearward	N/A	Suppressed
Belted Rear Facing	Forward	130	Suppressed
	Middle	131	Suppressed
	Rearward	134	Suppressed
Unbelted Rear Facing	Forward	N/A	Suppressed
	Middle	N/A	Suppressed
	Rearward	N/A	Suppressed

Successful Unbelted 5th percentile Female Dummy Reactivation was performed with the seat in the Rearward position. (SN513)

DATA SHEET 15 SUMMARY

Suppression Test Using 12-month-old CRABI Dummy (Part 572, Subpart R)
Section C Forward Facing Convertible CRS

NHTSA No.:	C40303	TEST DATE:	1-26-04
LABORATORY:	MGA	TECHNICIANS:	JL/TB
DUMMY TYPE:	12 Month Old	DUMMY SERIAL NO.:	082

CHILD RESTRAINT NAME:	Century
CHILD RESTRAINT MODEL:	Encore 4612
DATE OF MANUFACTURE:	8-16-2000

Base: __On __Off X N/A-Restraint does not have a removable base

Manufacturer's design seat back angle: 12.0°
 Tested seat back angle: 12.3°
 Manufacturer's specified anchorage position: 2nd Down
 Tested anchorage position: 2nd Down
 (Four positions, Uppermost as 1)

Blanket combinations were not used

Test Summary

Seat Belt	Seat Slide	Cinch Load (N)	No Blanket
Belted Forward Facing	Forward	131	Suppressed
	Middle	132	Suppressed
	Rearward	130	Suppressed
Unbelted Forward Facing	Forward	N/A	Suppressed
	Middle	N/A	Suppressed
	Rearward	N/A	Suppressed
Belted Rear Facing	Forward	130	Suppressed
	Middle	132	Suppressed
	Rearward	133	Suppressed
Unbelted Rear Facing	Forward	N/A	Suppressed
	Middle	N/A	Suppressed
	Rearward	N/A	Suppressed

Successful Unbelted 5th percentile Female Dummy Reactivation was performed with the seat in the Middle position. (SN513)

DATA SHEET 15 SUMMARY

Suppression Test Using 12-month-old CRABI Dummy (Part 572, Subpart R)
Section C Forward Facing Convertible CRS

NHTSA No.:	C40303	TEST DATE:	1-26-04
LABORATORY:	MGA	TECHNICIANS:	JL/TB
DUMMY TYPE:	12 Month Old	DUMMY SERIAL NO.:	082

CHILD RESTRAINT NAME:	Evenflo
CHILD RESTRAINT MODEL:	Medallion 254
DATE OF MANUFACTURE:	6-1-2000

Base: __On __Off X N/A-Restraint does not have a removable base

Manufacturer's design seat back angle: 12.0°
 Tested seat back angle: 12.2°
 Manufacturer's specified anchorage position: 2nd Down
 Tested anchorage position: 2nd Down
 (Four positions, Uppermost as 1)

Blanket combinations were not used

Test Summary

Seat Belt	Seat Slide	Cinch Load (N)	No Blanket
Belted Forward Facing	Forward	134	Suppressed
	Middle	133	Suppressed
	Rearward	132	Suppressed
Unbelted Forward Facing	Forward	N/A	Suppressed
	Middle	N/A	Suppressed
	Rearward	N/A	Suppressed
Belted Rear Facing	Forward	133	Suppressed
	Middle	131	Suppressed
	Rearward	131	Suppressed
Unbelted Rear Facing	Forward	N/A	Suppressed
	Middle	N/A	Suppressed
	Rearward	N/A	Suppressed

Successful Unbelted 5th percentile Female Dummy Reactivation was performed with the seat in the Forward position. (SN513)

DATA SHEET 16 SUMMARY

Suppression Test Using Newborn Infant Dummy (Part 572, Subpart K) Section A Car Bed

NHTSA No.:	C40303	TEST DATE:	1-26-04
LABORATORY:	MGA	TECHNICIANS:	JL/TB
DUMMY TYPE:	Newborn Infant	DUMMY SERIAL NO.:	003

CAR BED NAME:	Cosco
CAR BED MODEL:	Dream Ride 02-719
DATE OF MANUFACTURE:	6-16-2000

Base: __On __Off X N/A-Constraint does not have a removable base
(A car bed with a removable base shall be treated as two separate models, i.e. this form and test procedure will be completed with the base on and then repeated on a new form with the base off.

Manufacturer's design seat back angle: 12.0°
Tested seat back angle: 12.2°
Manufacturer's specified anchorage position: 2nd Down
Tested anchorage position: 2nd Down
(Four positions, Uppermost as 1)

Blanket and visor combinations were not used

Test Summary

Seat Belt	Seat Slide	Lateral	Fore/Aft
Belted	Forward	N/A	N/A
	Middle	N/A	N/A
	Rearward	Suppressed	Suppressed

Successful Unbelted 5th percentile Female Dummy Reactivation was performed with the seat in the Rearward position. (SN513)

The CRS would not fit in the Forward and Middle Seat Slide positions due to interference with the center console.

There was no telltale light indication; the car bed was classified as an Empty Seat. This was verified with the StarSCAN diagnostic tool.

DATA SHEET 23 SUMMARY

Low Risk Deployment Tests Using an Unbelted 3-Year-Old
Dummy (Part 572, Subpart P) (S22)
Position 1 – Chest On Instrument Panel (S22.4.2)

NHTSA No.:	C40303	TEST DATE:	1-29-04
LABORATORY:	MGA	TECHNICIANS:	WD/DW/BR
DUMMY TYPE:	3-Year-Old	DUMMY SERIAL NO.:	031

Manufacturer's design seat back angle: 12.0°
Tested seat back angle: 11.5°
Tested seat position: Full Aft

Height from floor pan to heel: 119 mm
Thorax cavity angle: 0.0°
Thigh angle: 22.8°
Point 1 height: 6 mm Above AB Module

Air Bag Deployment Timing

Stage No.	Firing time (ms)	Recorded firing time (ms)
1	0.0	0.0
2	130.0	130.2

3-Year-Old SN 031 Position 1 (Chest on Instrument Panel) 1-29-04

Injury Criteria	Max. Allowable Injury Assessment Values	Measured Value
HIC15	570	17
Peak Nij (Nte)	1.0	0.5
Time (ms)	NA	42.1
Peak Nij (Ntf)	1.0	0.2
Time (ms)	NA	22.2
Peak Nij (Nce)	1.0	0.1
Time (ms)	NA	83.4
Peak Nij (Ncf)	1.0	0.1
Time (ms)	NA	18.0
Neck Tension	1130 N	426
Neck Compression	1380 N	124
Chest g	55 g	15
Chest Displacement	34 mm	10

Calculated on data recorded for 100 ms after the initial deployment of the air bag. (S4.11(b))

DATA SHEET 24 SUMMARY

Low Risk Deployment Tests Using an Unbelted 3-Year-Old
Dummy (Part 572, Subpart P) (S22)
Position 2 – Head On Instrument Panel (S22.4.3)

NHTSA No.:	C40303	TEST DATE:	2-12-04
LABORATORY:	MGA	TECHNICIANS:	WD/DW/BR
DUMMY TYPE:	3-Year-Old	DUMMY SERIAL NO.:	031

Manufacturer's design seat back angle: 12.0°
 Tested seat back angle: 11.8°
 Tested seat position: Full Forward

Thorax cavity angle: 8.9°
 Thigh angle: 2.1°
 Point 1 height: 218 mm Below AB Module
 Chin height: 94 mm Below AB Module

Air Bag Deployment Timing

Stage No.	Firing time (ms)	Recorded firing time (ms)
1	0.0	0.0
2	130.0	130.3

3-Year-Old SN 031 Position 2 (Head on Instrument Panel) 2-12-04

Injury Criteria	Max. Allowable Injury Assessment Values	Measured Value
HIC15	570	81
Peak Nij (Nte)	1.0	0.5
Time (ms)	NA	78.6
Peak Nij (Ntf)	1.0	0.1
Time (ms)	NA	40.0
Peak Nij (Nce)	1.0	0.4
Time (ms)	NA	22.5
Peak Nij (Ncf)	1.0	0.4
Time (ms)	NA	25.5
Neck Tension	1130 N	335
Neck Compression	1380 N	771
Chest g	55 g	10
Chest Displacement	34 mm	1

Calculated on data recorded for 100 ms after the initial deployment of the air bag. (S4.11(b))

DATA SHEET 25 SUMMARY

Low Risk Deployment Tests Using an Unbelted 6-Year-Old
Dummy (Part 572, Subpart P) (S24)
Position 1 – Chest On Instrument Panel (S24.4.2)

NHTSA No.:	C40303	TEST DATE:	2-26-04
LABORATORY:	MGA	TECHNICIANS:	WD/DW/BR
DUMMY TYPE:	6-Year-Old	DUMMY SERIAL NO.:	153

Manufacturer's design seat back angle: 12.0°
Tested seat back angle: 12.3°
Tested seat position: Full Aft

Thorax cavity angle: 6.0°
Point 1 height: 1 mm Above AB Module

Air Bag Deployment Timing

Stage No.	Firing time (ms)	Recorded firing time (ms)
1	0.0	0.0
2	130.0	130.2

6-Year-Old SN 153 Position 1 (Chest on Instrument Panel) 2-26-04

Injury Criteria	Max. Allowable Injury Assessment Values	Measured Value
HIC15	700	2
Peak Nij (Nte)	1.0	0.3
Time (ms)	NA	40.0
Peak Nij (Ntf)	1.0	0.1
Time (ms)	NA	22.0
Peak Nij (Nce)	1.0	0.0
Time (ms)	NA	13.3
Peak Nij (Ncf)	1.0	0.0
Time (ms)	NA	17.2
Neck Tension	1490 N	349
Neck Compression	1820 N	50
Chest g	60 g	11
Chest Displacement	40 mm	7

Calculated on data recorded for 100 ms after the initial deployment of the air bag. (S4.11(b))

DATA SHEET 26 SUMMARY

Low Risk Deployment Tests Using an Unbelted 6-Year-Old
Dummy (Part 572, Subpart N) (S24)
Position 2 – Head On Instrument Panel (S24.4.3)

NHTSA No.:	C40303	TEST DATE:	2-26-04
LABORATORY:	MGA	TECHNICIANS:	WD/DW/BR
DUMMY TYPE:	6-Year-Old	DUMMY SERIAL NO.:	152

Manufacturer's design seat back angle: 12.0°
Tested seat back angle: 12.3°
Tested seat position: Full Forward

Thorax cavity angle: 35.1°
Thigh angle: 11.5°

Air Bag Deployment Timing

Stage No.	Firing time (ms)	Recorded firing time (ms)
1	0.0	0.0
2	130.0	130.3

6-Year-Old SN 152 Position 2 (Head on Instrument Panel) 2-26-04

Injury Criteria	Max. Allowable Injury Assessment Values	Measured Value
HIC15	700	43
Peak Nij (Nte)	1.0	0.3
Time (ms)	NA	54.2
Peak Nij (Ntf)	1.0	0.0
Time (ms)	NA	11.3
Peak Nij (Nce)	1.0	0.4
Time (ms)	NA	25.7
Peak Nij (Ncf)	1.0	0.1
Time (ms)	NA	16.5
Neck Tension	1490 N	205
Neck Compression	1820 N	549
Chest g	60 g	8
Chest Displacement	40 mm	0.4

Calculated on data recorded for 100 ms after the initial deployment of the air bag. (S4.11(b))

DATA SHEET 27 SUMMARY

Low Risk Deployment Tests Using an Unbelted 5th Percentile Female
Dummy (Part 572, Subpart O) (S26)
Position 1 - Chin On Module (S26.2)

NHTSA No.:	C40303	TEST DATE:	1-29-04
LABORATORY:	MGA	TECHNICIANS:	WD/DW/BR
DUMMY TYPE:	5 th Percentile Female	DUMMY SERIAL NO.:	517

Manufacturer's design seat back angle: 12.0°
 Tested seat back angle: 12.0°
 Tested seat position: Full Aft

Tested steering wheel angle: 25.0°
 Thorax cavity angle: 30.6°
 Chin Point height: 2 mm Above Module

Air Bag Deployment Timing

Stage No.	Firing time (ms)	Recorded firing time (ms)
1	0.0	0.0
2	130.0	130.2

5th Percentile Female SN 517 Position 1 (Chin On Module) 1-29-04

Injury Criteria	Max. Allowable Injury Assessment Values	Measured Value
HIC15	700	46
Peak Nij (Nte)	1.0	0.3
Time (ms)	NA	107.2
Peak Nij (Ntf)	1.0	0.5
Time (ms)	NA	28.0
Peak Nij (Nce)	1.0	0.5
Time (ms)	NA	140.6
Peak Nij (Ncf)	1.0	0.1
Time (ms)	NA	173.1
Neck Tension	2070 N	766
Neck Compression	2520 N	475
Chest g	60 g	21
Chest Displacement	52 mm	11
Left Femur	6805 N	321
Right Femur	6805 N	95

Calculated on data recorded for 125 ms after the initiation of the final stage of air bag deployment designed to deploy in any full frontal rigid barrier crash up to 26 km/h. (S4.11(d))

Second stage fire time of 130 ms; Injuries calculated on 0 ms to 255 ms

DATA SHEET 28 SUMMARY

Low Risk Deployment Tests Using an Unbelted 5th Percentile Female
Dummy (Part 572, Subpart O) (S26)
Position 2 - Chin On Rim (S26.3)

NHTSA No.:	C40303	TEST DATE:	2-12-04
LABORATORY:	MGA	TECHNICIANS:	WD/DW/BR
DUMMY TYPE:	5 th Percentile Female	DUMMY SERIAL NO.:	517

Manufacturer's design seat back angle: 12.0°
Tested seat back angle: 12.0°
Tested seat position: Full Aft

Tested steering wheel angle: 24.4°
Thorax cavity angle: 30.5°
Chin Point height: 4 mm Below Rim

Air Bag Deployment Timing

Stage No.	Firing time (ms)	Recorded firing time (ms)
1	0.0	0.0
2	130.0	130.2

5th Percentile Female SN 517 Position 2 (Chin On Rim) 2-12-04

Injury Criteria	Max. Allowable Injury Assessment Values	Measured Value
HIC15	700	10
Peak Nij (Nte)	1.0	0.7
Time (ms)	NA	14.0
Peak Nij (Ntf)	1.0	0.1
Time (ms)	NA	58.6
Peak Nij (Nce)	1.0	0.0
Time (ms)	NA	6.6
Peak Nij (Ncf)	1.0	0.1
Time (ms)	NA	62.1
Neck Tension	2070 N	796
Neck Compression	2520 N	60
Chest g	60 g	22
Chest Displacement	52 mm	14
Left Femur	6805 N	85
Right Femur	6805 N	33

Calculated on data recorded for 125 ms after the initiation of the final stage of air bag deployment designed to deploy in any full frontal rigid barrier crash up to 26 km/h. (S4.11(d))
Second stage fire time of 130 ms; Injuries calculated on 0 ms to 255 ms

DATA SHEET 30 VEHICLE WEIGHT, FUEL TANK, AND ATTITUDE DATA

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Clark Subrt

NHTSA No.: C40303
 Test Date: 4/1/04

IMPACT ANGLE:	Zero Degrees		
BELTED DUMMIES (YES/NO):	No – Front Occupants Yes – Center Rear Passenger		
TEST SPEED:	<u>X</u> 32 to 40 kmph	<u> </u> 0 to 48 kmph	<u> </u> 0 to 56 kmph
DRIVER DUMMY:	<u>X</u> 5 TH female		50 th Male
PASSENGER DUMMY:	<u>X</u> 5 TH female		<u>X</u> 50 th Male Ctr Rear

- | | | |
|----------|-----|---|
| <u>X</u> | 1. | Fill the transmission with transmission fluid to the satisfactory range. |
| <u>X</u> | 2. | Drain fuel from vehicle |
| <u>X</u> | 3. | Run the engine until fuel remaining in the fuel delivery system is used and the engine stops. |
| <u>X</u> | 4. | Record the useable fuel tank capacity supplied by the COTR |
| <u>X</u> | | Useable Fuel Tank Capacity supplied by COTR: 102.2 liters (27.0 gallons) |
| <u>X</u> | 5. | Record the fuel tank capacity supplied in the owner's manual. |
| <u>X</u> | | Useable Fuel Tank Capacity in owner's manual: 102.2 liters (27.0 gallons) |
| <u>X</u> | 6. | Using purple dyed Stoddard solvent having the physical and chemical properties of Type 1 solvent or cleaning fluid, Table 1, ASTM Standard D484-71, "Standard Specifications for Hydrocarbon Dry-cleaning Solvents," or gasoline, fill the fuel tank. |
| <u>X</u> | | Amount In Tank: 102.2 liters (27.0 gallons) |
| <u>X</u> | 7. | Fill the coolant system to capacity. |
| <u>X</u> | 8. | Fill the engine with motor oil to the Max. mark on the dip stick. |
| <u>X</u> | 9. | Fill the brake reservoir with brake fluid to its normal level. |
| <u>X</u> | 10. | Fill the windshield washer reservoir to capacity. |
| <u>X</u> | 11. | Inflate the tires to the tire pressure on the tire placard. If no tire placard is available, inflate the tires to the recommended pressure in the owner's manual. |

Tire placard pressure:	RF:	<u>33 psi</u>	LF:	<u>33 psi</u>	RR:	<u>33 psi</u>	LR:	<u>33 psi</u>
Owner's manual pressure:	RF:	<u>33 psi</u>	LF:	<u>33 psi</u>	RR:	<u>33 psi</u>	LR:	<u>33 psi</u>
Actual inflated pressure:	RF:	<u>33 psi</u>	LF:	<u>33 psi</u>	RR:	<u>33 psi</u>	LR:	<u>33 psi</u>

- | | | |
|----------|-----|--|
| <u>X</u> | 12. | Record the vehicle weight at each wheel to determine the unloaded vehicle weight (UVW), i.e. "as delivered" weight). |
|----------|-----|--|

Right Front (kg):	<u>601.0</u>	Right Rear (kg):	<u>514.8</u>
Left Front (kg):	<u>583.3</u>	Left Rear (kg):	<u>527.1</u>
Total Front (kg):	<u>1184.3</u>	Total Rear (kg):	<u>1041.9</u>
% Total Weight:	<u>53.2</u>	% Total Weight:	<u>46.8</u>
UVW = TOTAL FRONT PLUS TOTAL REAR (KG):		<u>2226.2</u>	

- | | | |
|----------|------|---|
| <u>X</u> | 13. | UVW Test Vehicle Attitude: (All dimensions in millimeters) |
| <u>X</u> | 13.1 | Mark a point on the vehicle above the center of each wheel. |
| <u>X</u> | 13.2 | Place the vehicle on a level surface. |

- ☒ 13.3 Measure perpendicular to the level surface to the 4 points marked on the body and record the measurements

RF:	855	LF:	849	RR:	925	LR:	918
-----	-----	-----	-----	-----	-----	-----	-----

- ☒ 14. Calculate the Rated Cargo and Luggage Weight (RCLW).

- ☒ 14.1 Does the vehicle have the vehicle capacity weight (VCW) on the certification label or tire placard?

☐ Yes, go to 14.3

☒ No, go to 14.2

- ☒ 14.2 VCW = Gross Vehicle Weight – UVW

$$VCW = 2999.0 \text{ kg} - 2226.2 \text{ kg} = 767.8 \text{ kg}$$

- ☒ 14.3 VCW = 767.8 kg (1693 lbs)

- ☒ 14.4 Does the certification or tire placard contain the Designated Seating Capacity (DSC)?

☐ Yes, go to 14.6

☒ No, go to 14.5 and skip 14.6

- ☒ 14.5 DSC = Total number of seat belt assemblies = 7

- ☐ 14.6 DSC =

- ☒ 14.7 RCLW = VCW – (68 kg x DSC) = 767.8 kg - (68 kg x 7) = 291.8 kg

- ☒ 14.8 Is the vehicle certified as a truck, MPV or bus (see the certification label on the door jamb)?

☒ Yes, if the calculated RCLW is greater than 136 kg, use 136 kg as the RCLW. (S8.1.1)

☐ No, use the RCLW calculated in 14.7

- ☒ 15. Fully Loaded Weight (100% fuel fill)

- ☒ 15.1 Place the appropriate test dummy in both front outboard seating positions.

Driver: ☒ 5th female ☐ 50th male

Passenger: ☒ 5th female ☐ 50th male

- ☒ 15.2 Load the vehicle with the RCLW from 14.7 or 14.8 whichever is applicable.

- ☒ 15.3 Place the RCLW in the cargo area. Center the load over the longitudinal centerline of the vehicle. (S8.1.1 (d))

- ☒ 15.4 Record the vehicle weight at each wheel to determine the Fully Loaded Weight.

Right Front (kg):	644.1	Right Rear (kg):	604.6
Left Front (kg):	594.7	Left Rear (kg):	615.5
Total Front (kg):	1238.8	Total Rear (kg):	1220.1
% Total Weight:	50.4	% Total Weight:	49.6
% GVW	47.0	% GVW	59.1
Fully Loaded Weight = Total Front Plus Total Rear (kg):		2458.9	

- ☒ 16. Fully Loaded Test Vehicle Attitude: (All dimensions in millimeters)

- ☒ 16.1 Place the vehicle on a level surface.

- X** 16.2 Measure perpendicular to the level surface to the 4 points marked on the body (see 13.1 above) and record the measurements

RF:	849	LF:	846	RR:	897	LR:	894
-----	-----	-----	-----	-----	-----	-----	-----

- X** 17. Drain the fuel system

- X** 18. Using purple dyed Stoddard solvent having the physical and chemical properties of Type 1 solvent or cleaning fluid, Table 1, ASTM Standard D484-71, "Standard Specifications for Hydrocarbon Dry-cleaning Solvents," fill the fuel tank to 94 percent of useable capacity. (FILLED TO 95.2% DUE TO MISINTERPRETATION OF FUEL FILL DATA)

X Fuel tank capacity x .94 = 102.2 liters (27.0 gallons) x .94 = 96.1 liters (25.38 gallons)

X Amount added 97.3 liters (25.7 gallons) 95.2%

- X** 19. Crank the engine to fill the fuel delivery system with Stoddard solvent

- X** 20. Calculate the test weight range.

- X** 20.1 Calculated Weight = UVW (see 12 above) + RCLW (see 14 above) + 2x(dummy weight)

$$\underline{2460.2 \text{ kg} = 2226.2 \text{ kg} + 136.0 \text{ kg} + 98.0 \text{ kg}}$$

- X** 20.2 Test Weight Range = Calculated Weight (- 4.5 kg, - 9 kg.)

$$\text{Max. Test Weight} = \text{Calculated Test Weight} - 4.5 \text{ kg} = \underline{2455.7 \text{ kg}}$$

$$\text{Min. Test Weight} = \text{Calculated Test Weight} - 9 \text{ kg} = \underline{2451.2 \text{ kg}}$$

- X** 21. Remove the RCLW from the cargo area.

- X** 22. Drain transmission fluid, engine coolant, motor oil, and windshield washer fluid from the test vehicle so that Stoddard solvent leakage from the fuel system will be evident.

- X** 23. Vehicle Components Removed For Weight Reduction:
RH rear tail light, hub covers, right rear window glass, and third row seats.

- X** 24. Secure the equipment and ballast in the load carrying area and distribute it, as nearly as possible, to obtain the proportion of axle weight indicated by the gross axle weight ratings and center it over the longitudinal centerline of the vehicle.

- X** 25. If necessary, add ballast to achieve the actual test weight.

X N/A

X Weight of Ballast: 34.0 kg in cargo area

- X** 26. Ballast, including test equipment, must be contained so that it will not shift during the impact event or interfere with data collection or interfere with high-speed film recordings or affect the structural integrity of the vehicle or do anything else to affect test results. Care must be taken to assure that any attachment hardware added to the vehicle is not in the vicinity of the fuel tank or lines.

- X** 27. Record the vehicle weight at each wheel to determine the actual test weight.

Right Front (kg):	626.4	Right Rear (kg):	594.7
Left Front (kg):	621.0	Left Rear (kg):	609.6
Total Front (kg):	1247.4	Total Rear (kg):	1204.3
% Total Weight:	50.9	% Total Weight:	49.1
% GVW	47.0	% GVW	59.1
(% GVW = Axle GVW divided by Vehicle GVW)			
TOTAL FRONT PLUS TOTAL REAR (kg):			2451.7

- ☒ 28. Is the test weight between the Max. Weight and the Min. Weight (See 20.2)?
- ☒ Yes
- ☐ No, explain why not.
- ☒ 29. Test Weight Vehicle Attitude: (all dimensions in millimeters)
- ☒ 29.1 Place the vehicle on a level surface
- ☒ 29.2 Measure perpendicular to the level surface to the 4 points marked on the body (see 13 above) and record the measurements

RF:	854	LF:	847	RR:	904	LR:	894
-----	-----	-----	-----	-----	-----	-----	-----

- ☒ 30. Summary of test attitude
- ☒ 30.1 AS DELIVERED:

RF:	855	LF:	849	RR:	925	LR:	918
-----	-----	-----	-----	-----	-----	-----	-----

AS TESTED:

RF:	854	LF:	846	RR:	897	LR:	894
-----	-----	-----	-----	-----	-----	-----	-----

FULLY LOADED:

RF:	849	LF:	846	RR:	897	LR:	894
-----	-----	-----	-----	-----	-----	-----	-----

- ☒ 30.2 Is the "as tested" test attitude equal to or between the "fully loaded" and "as delivered" attitude?
- ☒ Yes
- ☐ No, explain why not.

REMARKS:

I certify that I have read and performed each instruction.

Signature: Clark Subit

Date: 3/31/04

DATA SHEET 31

VEHICLE ACCELEROMETER LOCATION AND MEASUREMENT

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Clark Subrt

NHTSA No.: C40303
 Test Date: 4/1/04

IMPACT ANGLE:	Zero Degrees		
BELTED DUMMIES (YES/NO):	No – Front Occupants Yes – Center Rear Passenger		
TEST SPEED:	X 32 to 40 kmph	0 to 48 kmph	0 to 56 kmph
DRIVER DUMMY:	X 5 TH female		50 th Male
PASSENGER DUMMY:	X 5 TH female		X 50 th Male Ctr Rear

- ☒ 1. Find the location where the vertical plane parallel to the longitudinal centerline of the vehicle and through the center of the left front outboard seating position intersects the left rear seat cross member. Install an accelerometer at this intersection on the rear seat cross member to record x-direction accelerations. Record the location on the following chart.
- ☒ 2. Find the location where the vertical plane parallel to the longitudinal centerline of the vehicle and through the center of the right front outboard seating position intersects the right rear seat cross member. Install an accelerometer at this intersection on the rear seat cross member to record x-direction accelerations. Record the location on the following chart.
- ☒ 3. Find the location where a vertical plane through the longitudinal centerline of the vehicle and a vertical transverse plane through the center of the two wheels on opposite sides of the engine intersect at the top of the engine. Install an accelerometer at this intersection to record x-direction accelerations. Record the location on the following chart.
- ☒ 4. Find the location where a vertical plane through the longitudinal centerline of the vehicle and a vertical transverse plane through the center of the two wheels on opposite sides of the engine intersect the bottom of the engine. Install an accelerometer at this intersection to record x-direction accelerations. Record the location on the following chart.
- ☒ 5. Install an accelerometer on the right front brake caliper to record x-direction accelerations. Record the location on the following chart.
- ☒ 6. Find the location where a vertical plane through the longitudinal centerline of the vehicle intersects the top of the instrument panel. Install an accelerometer at this intersection to record x-direction accelerations. Record the location on the following chart.
- ☒ 7. Install an accelerometer on the left front brake caliper to record x-direction accelerations. Record the location on the following chart.
- ☒ 8. Find the location where a vertical plane through the longitudinal centerline of the vehicle intersects the floor of the trunk. Install an accelerometer on the trunk floor at this intersection to record z-direction accelerations. Record the location on the following chart.



REMARKS:

I certify that I have read and performed each instruction.

Signature: Clark Subrt

Date: 3/29/04

VEHICLE ACCELEROMETER LOCATION AND DATA SUMMARY

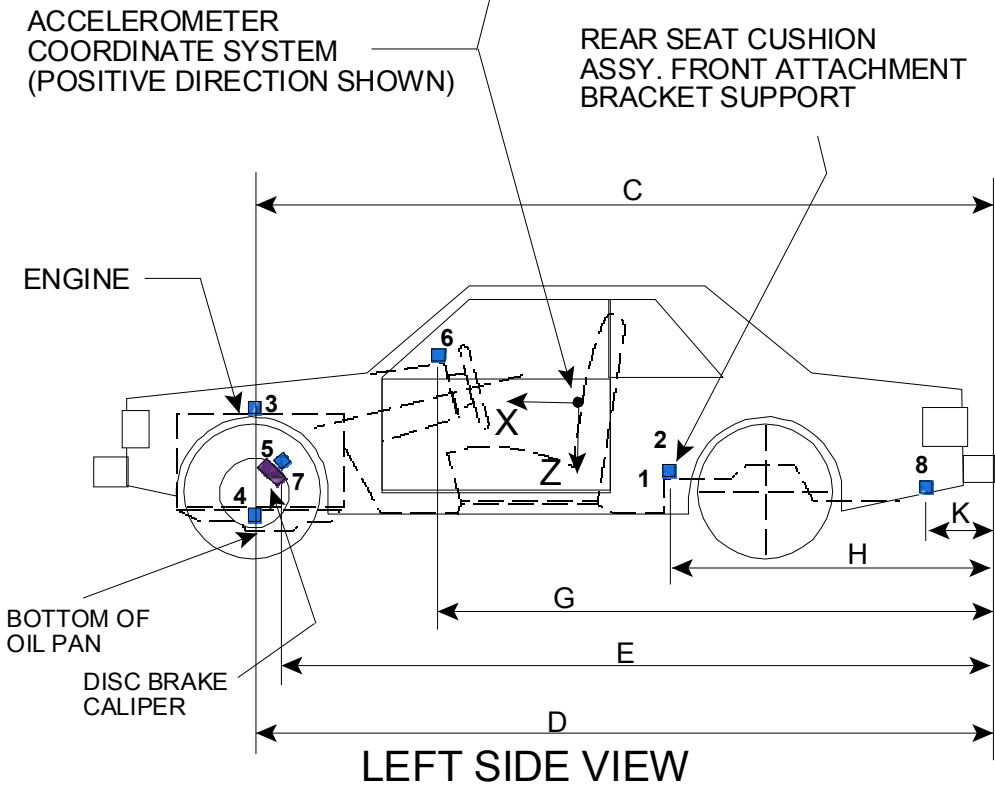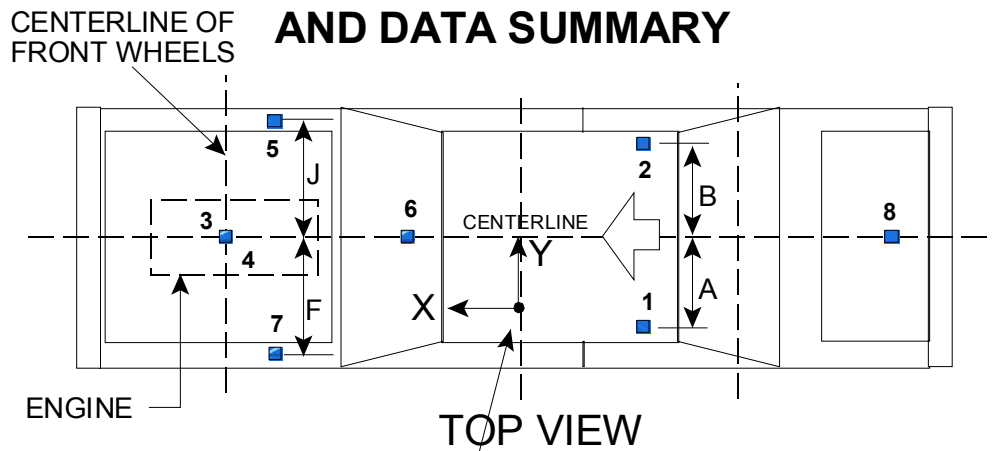

Dimensions Corresponding To The Letters "A" Through "K" (Excluding "I") Are Recorded In The Table On The Following Page.
Accelerometers Corresponding To The Numbers 1 Through 8 Are Specified On The Preceding Page.

DATA SHEET 31
VEHICLE ACCELEROMETER LOCATION AND MEASUREMENTS

<u>DIMENSION</u>	<u>LENGTH (mm)</u>	
<u>PRETEST VALUES</u>		
<u>A</u> (LH Rear Seat Xmbr)	392	
<u>B</u> (RH Rear Seat Xmbr)	392	
<u>C</u> (Engine Top)	4090	
<u>D</u> (Engine Bottom)	4102	
<u>E</u> (Caliper)	Right Side 4291	Left Side 4265
<u>F</u> (Left Caliper)	690	
<u>G</u> (IP)	3423	
<u>H</u> (Seat)	2065	
<u>J</u> (Right Caliper)	690	
<u>K</u> (Trunk)	715	
<u>POST TEST VALUES</u>		
<u>A</u> (LH Rear Seat Xmbr)	392	
<u>B</u> (RH Rear Seat Xmbr)	392	
<u>C</u> (Engine Top)	4142	
<u>D</u> (Engine Bottom)	4122	
<u>E</u> (Caliper)	Right Side 4295	Left Side 4263
<u>F</u> (Left Caliper)	685	
<u>G</u> (IP)	3424	
<u>H</u> (Seat)	2065	
<u>J</u> (Right Caliper)	687	
<u>K</u> (Trunk)	716	

DATA SHEET 32

PHOTOGRAPHIC TARGETS

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Clark Subrt

NHTSA No.: C40303
 Test Date: 4/1/04

IMPACT ANGLE:	Zero Degrees		
BELTED DUMMIES (YES/NO):	No – Front Occupants Yes – Center Rear Passenger		
TEST SPEED:	<u>X</u> 32 to 40 kmph	<u> </u> 0 to 48 kmph	<u> </u> 0 to 56 kmph
DRIVER DUMMY:	<u>X</u> 5 TH female		<u> </u> 50 th Male
PASSENGER DUMMY:	<u>X</u> 5 TH female	<u>X</u> 50 th Male Ctr Rear	

- | | | |
|-------------------------------------|------|--|
| ☒ | 1. | FMVSS 208 vehicle targeting requirements (See Figures 28A and 28B) |
| ☒ | 1.1 | Targets A1 and A2 are on flat rectangular panels. |
| ☒ | 1.2 | Three circular targets at least 90 mm in diameter and with black and yellow quadrants are mounted at the front on the outboard sides of A1 and A2. The center of each circular target is 100 mm from the one next to it. |
| ☒ | | Distance between targets (mm): 100 mm |
| ☒ | 1.3 | Three circular targets at least 90 mm in diameter and with black and yellow quadrants are mounted at the back on the outboard sides of on A1 and A2. The center of each circular target is 100 mm from the one next to it. |
| ☒ | | Distance between targets (mm): 100 mm |
| ☒ | 1.4 | The distance between the first circular target at the front of A1 and A2 and the last circular target at the back of A1 and A2 is at least 915 mm. |
| ☒ | | Distance between the first and last circular targets (mm): 915 mm |
| ☒ | 1.5 | Firmly fix target A1 on the vehicle roof in the vertical longitudinal plane that is coincident with the midsagittal plane of the driver dummy. |
| ☒ | 1.6 | Firmly fix target A2 on the vehicle roof in the vertical longitudinal plane that is coincident with the midsagittal plane of the passenger dummy. |
| ☒ | 1.7 | Two circular targets (C1 and C2) at least 90 mm in diameter and with black and yellow quadrants are mounted on the outside of the driver door. The centers of each circular target are at least 610 mm apart. |
| ☒ | | Distance between targets (mm): 610 mm |
| ☒ | 1.8 | Two circular targets (C1 and C2) at least 90 mm in diameter and with black and yellow quadrants are mounted on the outside of the passenger door. The centers of each circular target are at least 610 mm apart. |
| ☒ | | Distance between targets (mm): 610 mm |
| ☒ | 1.9 | Place tape with squares having alternating colors on the top portion of the steering wheel. |
| ☒ | 1.10 | Chalk the bottom portion of the steering wheel |
| ☒ | 1.11 | Is this an offset test? |
| | | ☐ Yes, continue with this section |
| | | ☒ No, go to 2. |
| | 1.12 | Measure the width of the vehicle. |
| | | Vehicle width (mm): |

☐	1.13	Find the centerline of the vehicle. ($\frac{1}{2}$ of the vehicle width)
☐	1.14	Find the line parallel to the centerline of the vehicle and 0.1 x vehicle width from the centerline of the vehicle.
☐	1.15	Apply 25 mm wide tape with alternating black and yellow squares parallel to and on each side of the line found in 1.14. The edge of each tape shall be 50 mm from the line found in 1.14. The tape shall extend from the bottom of the bumper to the front edge of the windshield. (Figure 28D)
☒	2.	Barrier Targeting
☒	2.1	Fix two stationary targets D1 and D2 to the barrier as shown in the Figure 28A. One target is in the vertical longitudinal plane that is coincident with the midsagittal plane of the driver dummy. The other is in the vertical longitudinal plane that is coincident with the midsagittal plane of the passenger dummy
☒	2.2	Targets D1 and D2 are on a rectangular panel.
☒	2.3	Three circular targets at least 90 mm in diameter and with black and yellow quadrants are mounted on the sides of the rectangular panel away from the longitudinal centerline of the vehicle. The center of each circular target is 100 mm from the one next to it.
☒		Distance between circular targets on D1 (mm): 100mm
☒		Distance between circular targets on D2 (mm): 100mm
☒	3.	FMVSS 208 Dummy Targeting Requirements
☒	3.1	Place a circular target with black and yellow quadrants on both sides of the driver dummy head as close as possible to the center of gravity of the head in the x and z direction (relative to the measuring directions of the accelerometers).
☒	3.2	Place a circular target with black and yellow quadrants on both sides of the passenger dummy head as close as possible to the center of gravity of the head in the x and z direction (relative to the measuring directions of the accelerometers).
☒	3.3	Place a circular target with black and yellow quadrants on the outboard shoulder of the driver dummy. Place the target as high up on the arm as possible at the intersection of the arm and shoulder. The sleeve of the shirt on the dummy may be cut to make the target visible, but do not remove any material.
☒	3.4	Place a circular target with black and yellow quadrants on the outboard shoulder of the passenger dummy. Place the target as high up on the arm as possible at the intersection of the arm and shoulder. The sleeve of the shirt on the dummy may be cut to make the target visible, but do not remove any material.
☒	4.	FMVSS 204 Targeting Requirements
☒	4.1	Is an FMVSS 204 indicant test ordered on the "COTR Vehicle Work Order?"
☐		Yes, continue with this form.
☒		No, this form is complete.
☐	4.2	Resection panel (Figure 28C)
☐	4.2.1	The panel deviates no more than 6 mm from perfect flatness when suspended vertically
☐	4.2.2	The 8 targets on the panel are circular targets at least 90 mm in diameter and with black and yellow quadrants.
☐	4.2.3	The center of each of the 4 outer targets are placed within 1 mm of the corners of a square measuring 914 mm on each side.
☐	4.2.4	Locate another square with 228 mm sides and with the center of this square coincident with the center of the 914 mm square.
☐	4.2.5	The center of the 4 inner targets are placed at the midpoints of each of the 228 mm sides.

-  4.3 Place a circular target at least 90 mm in diameter and with black and yellow quadrants on a material (cardboard, metal, etc.) that can be taped to the top of the steering column.
-  4.4 Tape the target from 4.3 to the top of the steering column in a manner that does not interfere with the movement of the steering column in a crash

REMARKS: Center Rear Passenger Dummy Target Information:


Horizontal distance from camera to dummy reference targets: 762 mm
Horizontal distance from camera to vehicle reference targets: 1074 mm
Distance between 1" reference targets: 75 mm
Reference targets were placed on inch tape for continuous reference.

I certify that I have read and performed each instruction.


Signature: 

Date: 4/1/04


REFERENCE PHOTO TARGETS

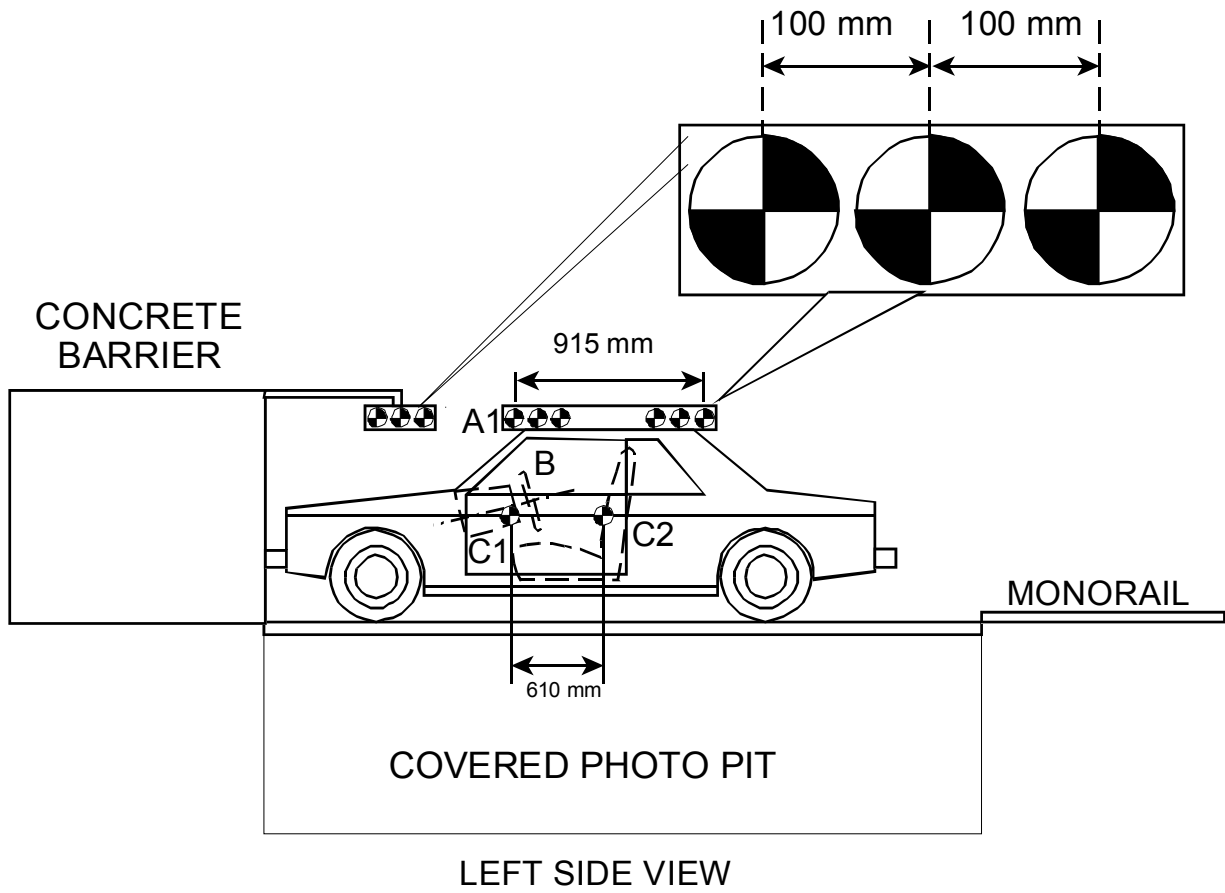


RESECTION PANEL TARGETING ALIGNMENT

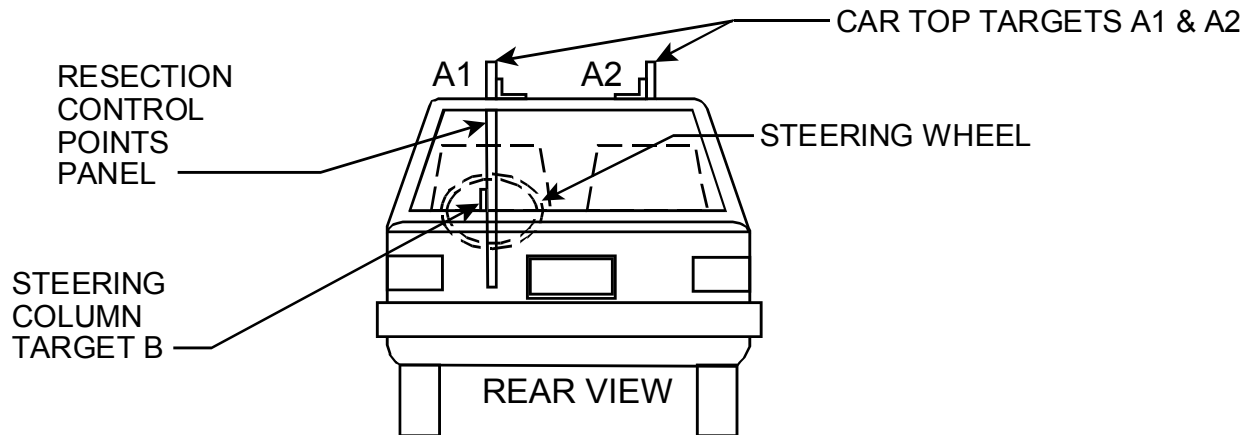

TEST RUN STEERING COLUMN CAMERA VIEW OF TYPICAL TIME ZERO VEHICLE POSITION

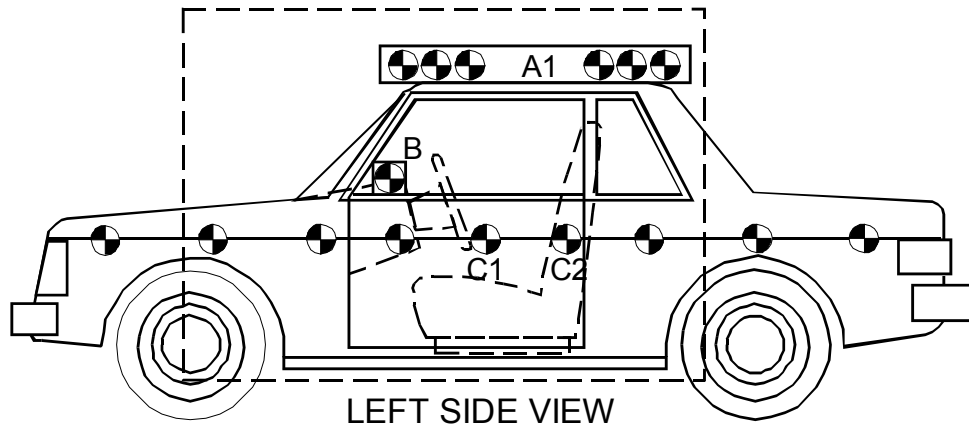

PRE-RUN STEERING COLUMN HIGH SPEED CAMERA VIEW

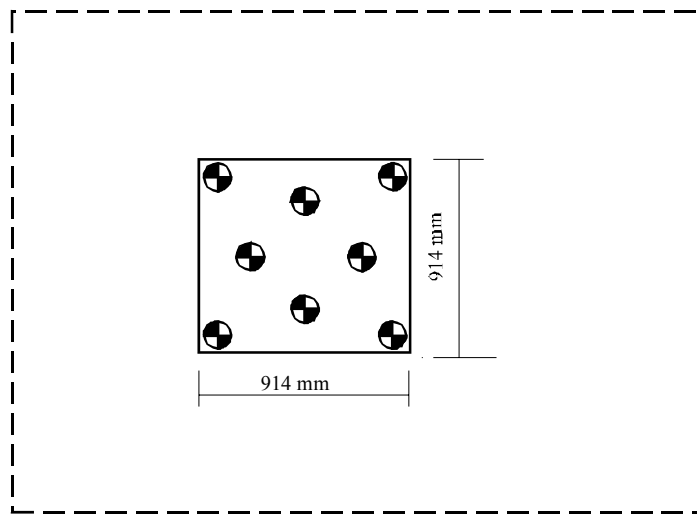

LEFT SIDE VIEW

DATA SHEET 33
CAMERA LOCATIONS

Test Vehicle: 2004 Dodge Durango
Test Program: FMVSS 208 Compliance


NHTSA No.: C40303
Test Date: 4/1/04
Time: 12:57 pm

CAMERA NO.	VIEW	CAMERA POSITIONS (mm) *			LENS (mm)	SPEED (fps)
		X	Y	Z		
1	Real Time Left Side View	N/A	N/A	N/A		24
2	Left Side View (Barrier face to front seat backs)	-946	7960	1541	25	1031
3	Left Side View (Driver)	-1513	8754	1455	25	1010
4	Left Side View (B-post aimed toward center of steering wheel)	-4506	5089	2010	50	1111
5	Left Side View (Steering Column)	-2051	8364	1560	25	1020
6	Left Side View (Steering Column)	-2040	8364	1032	25	1000
7	Right Side View (Overall)	-2259	-7690	1540	13	1005
8	Right Side View (Passenger)	-1456	-10222	1383	75	1250
9	Right Side View (Angle)	-4612	-5562	2100	50	**
10	Right Side View (Front door)	-974	-8021	1517	25	1010
11	Front View Windshield	390	0	2940	13	1015
12	Front View Driver	70	448	2265	13	1010
13	Front View Passenger	70	-435	2261	13	1015
14	Overhead Barrier Impact View	-420	0	4340	8	1005
15	Pit Camera Engine View	-946	0	-3050	13	1010
16	Pit Camera Fuel Tank View	-2820	0	-3080	13	1005
17	Onboard Rear Passenger View	N/A	N/A	N/A	13	513

* X - film plane to barrier face
Y - film plane to monorail centerline
Z - film plane to ground

** No usable film

CAMERA POSITIONS FOR FMVSS 208

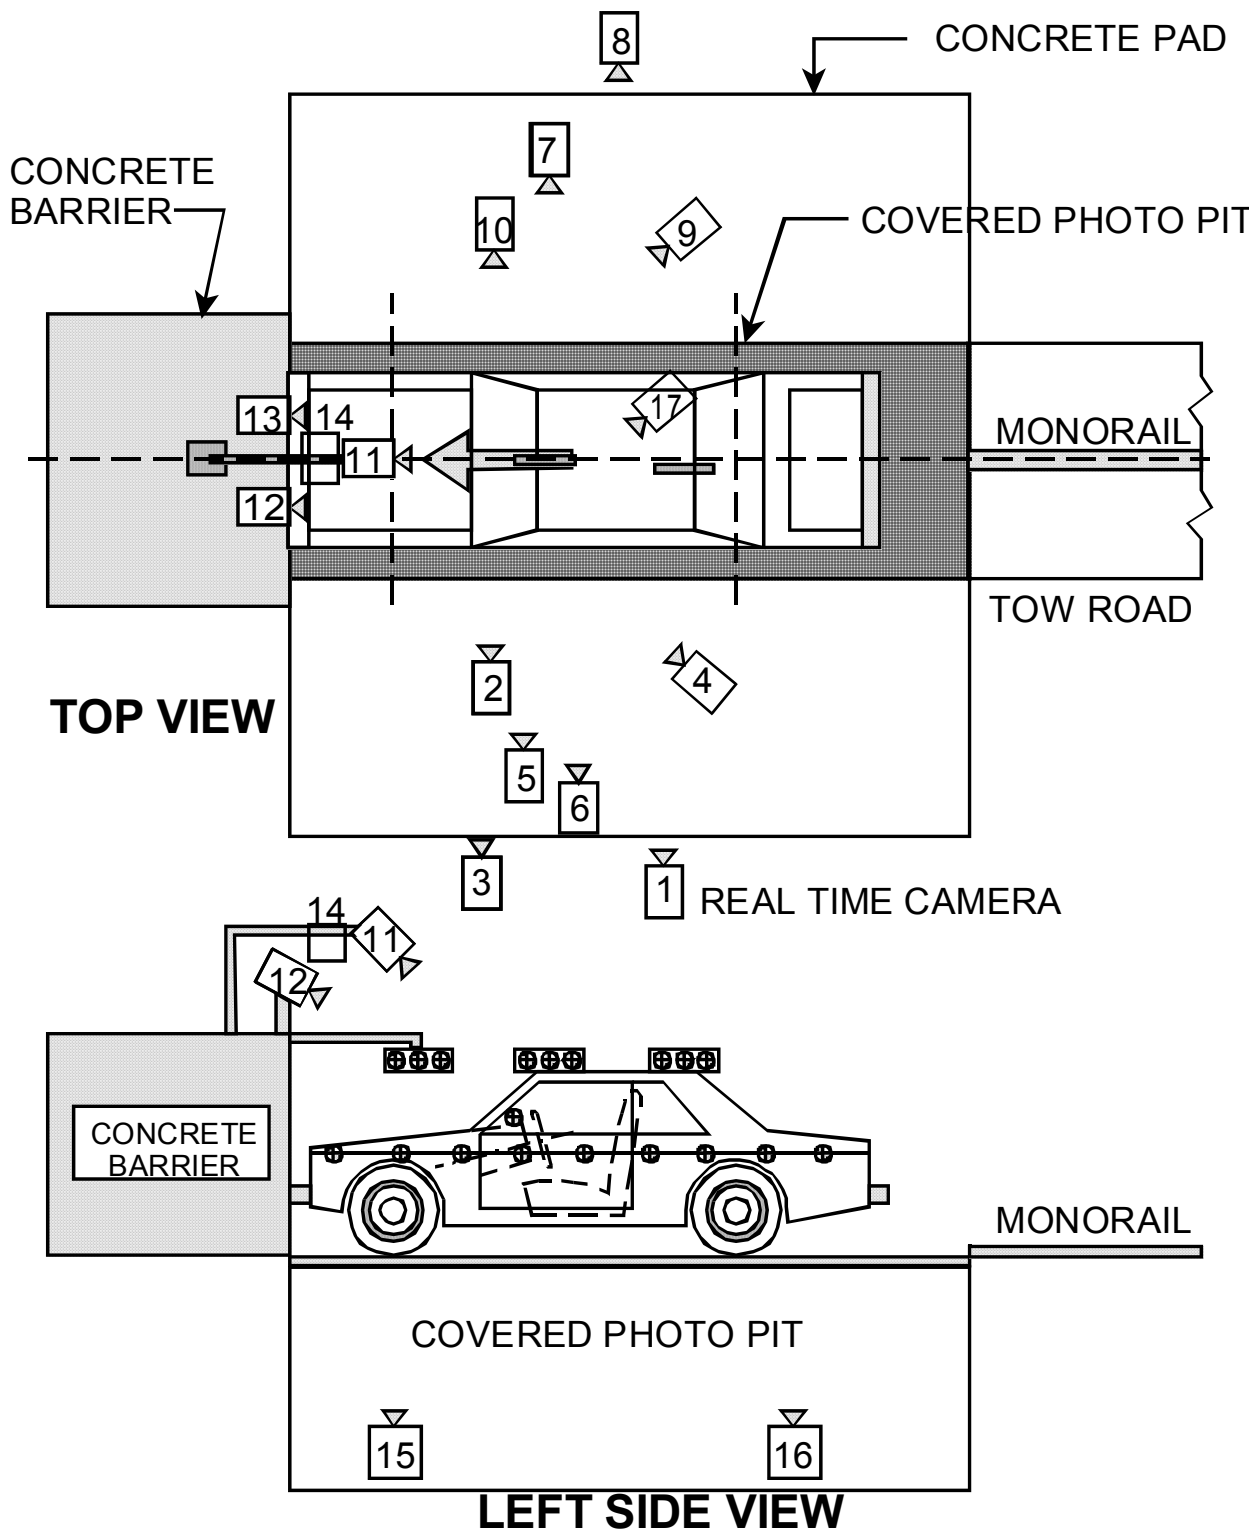

DATA SHEET 34

APPENDIX G DUMMY POSITIONING PROCEDURES FOR 5th% DRIVER TEST DUMMY CONFORMING TO SUBPART O OF PART 572

Test Vehicle: 2004 Dodge Durango
Test Program: FMVSS 208 Compliance
Test Technician: Eric Peschman

NHTSA No.: C40303
Test Date: 4/1/04

IMPACT ANGLE:	Zero Degrees		
BELTED DUMMIES (YES/NO):	No – Front Occupants Yes – Center Rear Passenger		
TEST SPEED:	☒ 32 to 40 kmph	☐ 0 to 48 kmph	☐ 0 to 56 kmph
DRIVER DUMMY:	☒ 5 TH female		☐ 50 th Male
PASSENGER DUMMY:	☒ 5 TH female		☒ 50 th Male Ctr Rear

- X 1. Position the seat's adjustable lumbar supports so that the lumbar supports are in the lowest, retracted or deflated adjustment position. (S16.2.10.1)
___ N/A – No lumbar adjustment
- X 2. Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2)
X N/A – No additional support adjustment
- X 3. If the seat cushion adjusts fore and aft, independent of the seat back, set this adjustment to the full rearward position. (S16.2.10.3.1)
X N/A – No independent fore-aft seat cushion adjustment
- X 4. Use the seat markings determined during the completion of Data Sheet 14 to set the rearmost fore-aft position, mid-height position and the seat cushion mid-angle. (S16.3.2.1.1)
- X 5. If the vehicle has an adjustable accelerator pedal, place it in the full forward position. (S16.3.2.2.1)
X N/A accelerator pedal not adjustable
- X 6. Set the steering wheel hub at the geometric center of the full range of driving positions including any telescoping positions as determined in data sheet 14. (S16.2.9)
- X 7. Fully recline the seat back. (S16.3.2.1.2)
___ N/A seat back not adjustable.
- X 8. Place the dummy in the seat with the legs at an angle of 120 degrees to the thighs. The calves should not be touching the seat cushion. (S16.3.2.1.2)
- X 9. Position the dummy in the seat such that the midsagittal plane is coincident with the longitudinal seat cushion markings as determined in item 1.18 of Data Sheet 14 (S16.3.2.1.3 and S16.3.2.1.4)
- X 10. Hold down the dummy's thighs and push rearward on the upper torso to maximize the pelvic angle. (S16.3.2.1.5)
- X 11. Set the angle between the legs and the thighs to 120 degrees. (S16.3.2.1.6)

- ☒ 12. Set the transverse distance between the centers of the front of the knees at 160 to 170 mm. (6.3 to 6.7 inches) Center the knee separation with respect to the longitudinal seat cushion marking as determined in item 1.18 of Data Sheet 14. (S16.3.2.1.6)
Record Knee Separation 165 mm
- ☒ 13. Push rearward on the dummy's knees until the pelvis contacts the seat back, or the backs of the calves contact the seat cushion, whichever occurs first. (S16.3.2.1.6)
☐ Pelvis contacted seat back.
☒ Calves contacted seat cushion.
- ☒ 14. Gently rock the upper torso ± 5 degrees (approximately 51 mm (2 inches)) side to side three time. (S16.3.2.1.7)
- ☒ 15. If needed, extend the legs until the feet do not contact the floor pan. The thighs should be resting on the seat cushion. (S16.3.2.1.8)
- ☒ 16. Position the right foot until the foot is in line with a longitudinal vertical plane passing through the center of the accelerator pedal. Maintain the leg and thigh in a vertical plane. (S16.3.2.1.8)
- ☒ 17. Rotate the left leg and thigh laterally to equalize the distance between each knee and the longitudinal seat cushion marking as determined in item 1.18 of Data Sheet 14. (S16.3.2.1.8)
- ☒ 18. Attempt to return the seat to the foremost fore-aft position, mid-height, and seat cushion mid-angle. The foot may contact and depress the accelerator and/or change the angle of the foot with respect to the leg. (S16.3.2.1.8)
☒ Foremost position achieved. Proceed to step 23.
☐ Foremost not achieved because of foot interference. Proceed to step 20.
☐ Foremost not achieved because of steering wheel contact.
- ☐ 19. If the dummy's legs contact the steering wheel, move the steering wheel up the minimum amount required to avoid contact. If the steering wheel is not adjustable separate the knees the minimum required to avoid contact. (S16.3.2.1.8)
☐ N/A- there was no leg contact
☐ Steering wheel repositioned
☐ Knees separated
- ☐ 20. If the left foot interferes with the clutch or brake pedals, rotate the left foot about the leg to provide clearance. If this is not sufficient, rotate the thigh outboard at the hip the minimum amount required for clearance. (S16.3.2.1.8)
☐ N/A, No foot interference with pedals.
☐ Foot adjusted to provide clearance.
☐ Foot and Thigh adjusted to provide clearance.

- ☐ 21. Continue to move the seat. Use seat controls to line up the seat markings determined during the completion of Data Sheet 14 to set the foremost fore-aft position, mid-height position and the seat cushion mid-angle. If the dummy contacts the interior move the seat rearward until a maximum clearance of 5 mm (0.2 inches) is achieved or the seat is in the closest detent position that does not cause dummy contact. (S16.3.2.1.8)
☐ Foremost, mid-height position and the seat cushion mid-angle reached

☐ Dummy contact. Clearance set at maximum of 5mm
Measured Clearance _____

☐ Dummy Contact. Seat set at nearest detent position.
Seat position ☐ detent positions rearward of foremost
(Foremost is position zero)
- ☐ 22. If the steering wheel was repositioned in step 19, return the steering wheel to the original position. If the steering wheel contacts the dummy before reaching the original position, position the wheel until a maximum clearance of 5mm (.2 inches) is achieved, or the steering wheel is in the closest detent position that does not cause dummy contact. (S16.3.2.1.8)
☐ N/A Steering wheel was not repositioned.

☐ Original position achieved.

☐ Dummy contact. Clearance set at maximum of 5mm
Measured Clearance _____

☐ Dummy Contact. Steering wheel set at nearest detent position.
Steering wheel position ☐ detent positions upward of original position.
(Original position is position zero)
- ☒ 23. If the seat back is adjustable, rotate the seat back forward while holding the thighs in place. Continue rotating the seat back forward until the transverse instrument platform of the dummy head is level ± 0.5 degrees. If the head cannot be leveled using the seat back adjustment, or the seat back is not adjustable, use the lower neck bracket adjustment to level the head. If a level position cannot be achieved, minimize the angle. (S16.3.2.1.9)

☒ Head Level Achieved. (Check all that apply)
☒ Head leveled using the adjustable seat back
☐ Head leveled using the neck bracket.
Head Angle 0.4 degrees

☐ Head Level NOT Achieved. (Check all that apply)
☐ Head adjusted using the adjustable seat back
☐ Head adjusted using the neck bracket.
Head Angle _____ degrees
- ☒ 24. Verify the pelvis is not interfering with the seat bight. (S16.3.2.1.9)
☒ No interference
☐ Pelvis moved forward the minimum amount so that it is not caught in the seat bight.

- ☒ 25. Verify the dummy abdomen is properly installed. (S16.3.2.1.9)
☒ Abdomen still seated properly into dummy
☐ Abdomen was adjusted because it was not seated properly into dummy
- ☒ 26. Head Angle
☐ N/A, neither the pelvis nor the abdomen were adjusted.
- ☒ 26.1 Head still level (Go to 27)
- ☐ 26.2 Head level adjusted
- ☐ Head Level Achieved. (Check all that apply)
☐ Head leveled using the adjustable seat back
☐ Head leveled using the neck bracket.
Head Angle _____ degrees
- ☐ Head Level NOT Achieved. (Check all that apply)
☐ Head level adjusted using the adjustable seat back
☐ Head level adjusted using the neck bracket.
Head Angle _____ degrees
- ☒ 27. If the dummy torso contacts the steering wheel while performing step 23, reposition the steering wheel in the following order to eliminate contact.
☒ N/A, No dummy torso contact with the steering wheel.
- ☒ 27.1 Adjust telescoping mechanism.
☒ N/A No telescoping adjustment.
☐ Adjustment performed (fill in appropriate change)
Steering wheel moved _____ detent positions in the forward direction.
Steering wheel moved _____ mm in the forward direction.
- ☒ 27.2 Adjust tilt mechanism.
☐ N/A No tilt adjustment.
☒ No adjustment performed.
☐ Adjustment performed.
Steering wheel moved _____ detent positions Upward/Downward.
(circle one)
Steering wheel moved _____ degrees Upward/Downward
- ☒ 27.3 Adjust Seat in the aft direction.
☒ No Adjustment performed.
☐ Seat moved aft _____ mm from original position.
☐ Seat moved aft _____ detent positions from the original position.
- ☒ 28. Measure and set the pelvic angle using the pelvic angle gage TE-2504. The pelvic angle should be 20.0 degrees $\pm$ 2.5 degrees. If the pelvic angle cannot be set to the specified range because the head will not be level, adjust the pelvis as closely as possible to the angle range, but keep the head level.
☒ Pelvic angle set to 20.0 degrees $\pm$ 2.5 degrees.
☐ Pelvic angle of 20.0 degrees not achieved, the angular difference was minimized.
☐ Record the pelvic angle. _____ 21.0 _____ degrees

- ☒ 29. Check the dummy for contact with the interior after completing adjustments.
☒ No contact.
☐ Dummy in contact with interior.
 ☐ Seat moved aft ____ mm from the previous position.
 ☐ Seat moved aft ____ detent positions from the previous position.
- ☒ 30. Check the dummy to see if additional interior clearance is obtained, allowing the seat to be moved forward.
☒ N/A, Seat already at foremost position.
☐ Clearance unchanged. No adjustments required.
☐ Additional clearance available
 ☐ Seat moved Forward ____ mm from the previous position.
 ☐ Seat moved Forward ____ detent positions from the previous position.
- ☒ 31. Driver's foot positioning, right foot. Place the foot perpendicular to the leg and determine if the heel contacts the floor pan at any leg position. If the heel contacts the floor pan proceed to step 32 otherwise, proceed to step 33.
- ☐ 32. Perform the following steps until either all steps are completed, or the foot contacts the accelerator pedal. Step 32.6 shall be completed in all cases.
- ☐ 32.1 With the rear of the heel contacting the floor pan, move the foot forward until pedal contact occurs or the foot is at the full forward position.
- ☐ 32.2 If the vehicle has an adjustable accelerator pedal, move the pedals rearward until pedal contact occurs or the pedals reach the full rearward position.
- ☐ 32.3 Extend the leg, allowing the heel to lose contact with the floor until the foot contacts the pedal. Do not raise the toe of the foot higher than the top of the accelerator pedal. If the foot does not contact the pedal, proceed to the next step. If pedal contact does occur, place a tapered foam block as shown in Figure G1 under the heel with the shallow part of the taper facing forward.
- ☐ 32.4 Angle the foot to achieve contact between the foot and the pedal. If the foot does not contact the pedal, return the foot to the perpendicular orientation. If pedal contact does occur, place a tapered foam block as shown in Figure G1 under the heel with the shallow part of the taper facing forward.
- ☐ 32.5 Align the centerline of the foot with the vertical-longitudinal plane passing through the center of the accelerator pedal. Place a tapered foam block as shown in Figure G1 under the heel with the shallow part of the taper facing forward.
- ☐ 32.6 Record foot position
 ☐ Pedal Contact achieved. Contact occurred at step ____ .
 ☐ Heel contacts floor pan
 ☐ Heel set _____ mm from floor pan.
 ☐ Pedal Contact not achieved. Heel set _____ mm from the floor pan.

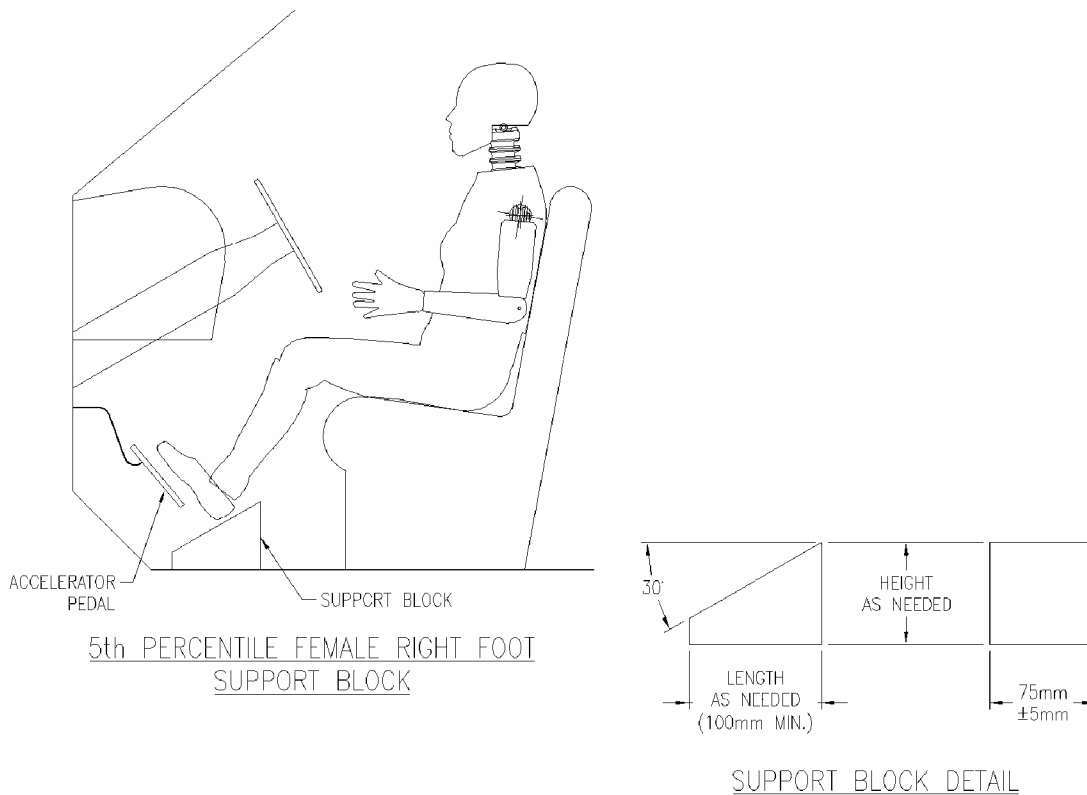


FIGURE G1

- X 33. Perform the following steps until either all steps are completed, or the foot contacts the accelerator pedal. Step 33.5 shall be completed in all cases.
- X 33.1 Extend the leg until the foot contacts the pedal. Do not raise the toe of the foot higher than the top of the accelerator pedal. If the foot does not contact the pedal, proceed to the next step. If pedal contact does occur, place a tapered foam block as shown in Figure G1 under the heel with the shallow part of the taper facing forward.
- ___ 33.2 If the vehicle has an adjustable accelerator pedal, move the pedals rearward until pedal contact occurs or the pedals reach the full rearward position. If pedal contact does occur, place a tapered foam block as shown in Figure G1 under the heel with the shallow part of the taper facing forward.
- ___ 33.3 Angle the foot to achieve contact between the foot and the pedal. If the foot does not contact the pedal, return the foot to the perpendicular orientation. If pedal contact does occur, place a tapered foam block as shown in Figure G1 under the heel with the shallow part of the taper facing forward.
- ___ 33.4 Align the centerline of the foot in the same horizontal plane as the centerline of the accelerator pedal. Place a tapered foam block as shown in Figure G1 under the heel with the shallow part of the taper facing forward.

X 33.5 Record foot position

X Pedal Contact achieved. Contact occurred at step 33.1.

X Heel set 64 mm from floor pan.

 Pedal Contact not achieved. Heel set mm from the floor pan.

X 34. Driver's foot positioning, left foot.

X 34.1 Place the foot perpendicular to the leg and determine if the heel contacts the floor pan at any leg position. If the heel contacts the floor pan proceed to step 34.2, otherwise position the leg as perpendicular to the thigh as possible with the foot parallel to the floor pan.

X 34.2 Place the foot on the toe board with the heel resting on the floor pan as close to the intersection of the floor pan and the toe board as possible. Adjust the angle of the foot if necessary to contact the toe board. If the foot will not contact the toe board, set the foot perpendicular to the leg, and set the heel on the floor pan as far forward as possible. Do not place the foot on the wheel well projection or footrest. If the pedals interfere with the placement of the foot, reposition the foot by rotating the foot about the leg, or rotate the leg outboard about the hip if necessary.

 Foot rotated about the leg

 Foot rotated about the leg, and the leg rotated about the hip.

X No pedal interference

X 34.3 Record foot position.

 Heel does not contact floor pan.

 Foot placed on toe board.

X Foot placed on floor pan.

X 35. Driver arm/hand positioning.

X 35.1 Place the dummy's upper arms adjacent to the torso with the arm centerlines as close to a vertical longitudinal plane as possible. (S16.3.2.3.1)

X 35.2 Place the palms of the dummy in contact with the outer part of the steering wheel rim at its horizontal centerline with the thumbs over the steering wheel rim. (S16.3.2.3.2)

X 35.3 If it is not possible to position the thumbs inside the steering wheel rim at its horizontal centerline, then position them above and as close to the horizontal centerline of the steering wheel rim as possible. (S16.3.2.3.3)

X 35.4 Lightly tape the hands to the steering wheel rim so that if the hand of the test dummy is pushed upward by a force of not less than 9 N (2 lb) and not more than 22 N (5 lb), the tape releases the hand from the steering wheel rim. S16.3.2.3.4

X 36. Adjustable head restraints

 N/A, there is no head restraint adjustment

N/A 36.1 If the head restraint has an automatic adjustment, leave it where the system positions the restraint after the dummy is placed in the seat. (S16.3.4.1) Go to 37.

☒ 36.2 Adjust each head restraint vertically so that the horizontal plane determined in item 3 of Data Sheet 14 is aligned with the center of gravity (CG) of the dummy head. (S16.3.4.3)

☒ 36.3 If the above position is not attainable, move the vertical center of the head restraint to the closest detent below the center of the head CG. (S16.3.4.3)

☐ N/A midpoint position attained in previous step

☐ Headrest set at nearest detent below the head CG

☒ 36.4 If the head restraint has a fore and aft adjustment, place the restraint in the foremost position or until contact with the head is made, whichever occurs first. (S16.3.4.4)

☒ 37. Driver and passenger manual belt adjustment (for tests conducted with a belted dummy). (S16.3.5) **Unbelted Test**

☐ 37.1 If an adjustable seat belt D-ring anchorage exists, place it in the manufacturer's design position for a 5th percentile adult female.

This information will be supplied by the COTR.

Manufacturer's specified position _____

Actual Position _____

☐ 37.2 Place the Type 2 manual belt around the test dummy and fasten the latch. (S16.3.5.2)

☐ 37.3 Ensure that the dummy's head remains as level as possible. (S16.3.5.3)

☐ 37.4 Remove all slack from the lap belt. Pull the upper torso webbing out of the retractor and allow it to retract; repeat this operation four times. Apply a 9 N (2 lbf) to 18 N (4 lbf) tension load to the lap belt. If the belt system is equipped with a tension-relieving device, introduce the maximum amount of slack into the upper torso belt that is recommended by the manufacturer. If the belt system is not equipped with a tension-relieving device, allow the excess webbing in the shoulder belt to be retracted by the retractive force of the retractor. (S16.3.5.4)

REMARKS:

I certify that I have read and performed each instruction.

Signature: 

Date: 4/1/04

APPENDIX G
DUMMY POSITIONING PROCEDURES
FOR 5th% PASSENGER TEST DUMMY CONFORMING TO SUBPART O OF PART 572

IMPACT ANGLE:	Zero Degrees		
BELTED DUMMIES (YES/NO):	No – Front Occupants Yes – Center Rear Passenger		
TEST SPEED:	☒ 32 to 40 kmph	☐ 0 to 48 kmph	☐ 0 to 56 kmph
DRIVER DUMMY:	☒ 5 TH female		☐ 50 th Male
PASSENGER DUMMY:	☒ 5 TH female		☒ 50 th Male Ctr Rear

(Check this item ONLY if it applies to this vehicle.)

☐ The passenger seat adjustments are controlled by the adjustments made to the driver's seat. Therefore, positioning of the passenger dummy is made simultaneously with the driver dummy. Adjustments made to the seat to position the driver will over ride any adjustments that would normally be made to position the passenger. (S16.2.10.3)

- ☒ 1. Position the seat's adjustable lumbar supports so that the lumbar supports are in the lowest, retracted or deflated adjustment position. (S16.2.10.1)
☐ N/A – No lumbar adjustment
- ☒ 2. Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2)
☒ N/A – No additional support adjustment
- ☒ 3. If the seat cushion adjusts fore and aft, independent of the seat back, set this adjustment to the full rearward position. (S16.2.10.3.1)
☒ N/A – No independent fore-aft seat cushion adjustment
- ☒ 4. Use the seat markings determined during the completion of Data Sheet 14 to set the rearmost fore-aft position, mid-height position and the seat cushion mid-angle. (S16.3.3.1.1)
- ☒ 5. Fully recline the seat back. (S16.3.3.1.2)
☐ N/A seat back not adjustable.
- ☒ 6. Place the dummy in the seat with the legs at an angle of 120 degrees to the thighs. The calves should not be touching the seat cushion. (S16.3.3.1.2)
- ☒ 7. Position the dummy in the seat such that the midsagittal plane is coincident with the longitudinal seat cushion marking that was determined in item 2.19 of Data Sheet 14 (S16.3.3.1.3 and S16.3.3.1.4)
- ☒ 8. Hold down the dummy's thighs and push rearward on the upper torso to maximize the pelvic angle. (S16.3.3.1.5)
- ☒ 9. Set the angle between the legs and the thighs to 120 degrees. (S16.3.3.1.6)

- 138

- ☒ 16. Verify the pelvis is not interfering with the seat bight. (S16.3.3.1.9)
☒ No interference
☐ Pelvis moved forward the minimum amount so that it is not caught in the seat bight.
- ☒ 17. Verify the dummy abdomen is properly installed. (S16.3.3.1.9)
☒ Abdomen still seated properly into dummy
☐ Abdomen was adjusted because it was not seated properly into dummy
- ☒ 18. Head Angle
☒ N/A, neither the pelvis nor the abdomen were adjusted.
- ☒ 18.1 Head still level (Go to 19)
- ☐ 18.2 Head level adjusted
- ☐ Head Level Achieved. (Check all that apply)
☐ Head leveled using the adjustable seat back
☐ Head leveled using the neck bracket.
Head Angle _____ degrees
- ☐ Head Level NOT Achieved. (Check all that apply)
☐ Head adjusted using the adjustable seat back
☐ Head adjusted using the neck bracket.
Head Angle _____ degrees
- ☒ 19. Measure and set the pelvic angle using the pelvic angle gage TE-2504. The pelvic angle should be 20.0 degrees $\pm$ 2.5 degrees. If the pelvic angle cannot be set to the specified range because the head will not be level, adjust the pelvis as closely as possible to the angle range, but keep the head level.
☒ Pelvic angle set to 20.0 degrees $\pm$ 2.5 degrees.
☐ Pelvic angle of 20.0 degrees not achieved, the angular difference was minimized.
☐ Record the pelvic angle. 20.6 degrees
- ☒ 20. Check the dummy for contact with the interior after completing adjustments.
☒ No contact.
☐ Dummy in contact with interior.
☐ Seat moved aft _____ mm from the previous position.
☐ Seat moved aft _____ detent positions from the previous position.
- ☒ 21. Verify the transverse instrument platform of the dummy head is level $\pm$ 0.5 degrees. Use the lower neck bracket adjustment to level the head. If a level position cannot be achieved, minimize the angle. (S16.3.3.1.9, S16.3.3.1.10, and S16.3.3.1.11)
☒ Head Level Achieved
Head Angle 0.1 degrees
☐ Head Level NOT Achieved.
Head Angle _____ degrees

X 22. Check the dummy to see if additional interior clearance is obtained, allowing the seat to be moved forward. (S16.3.3.1.12)

___ N/A Bench Seat

___ N/A Seat already at full forward position.

X Clearance unchanged. No adjustments required.

___ Additional clearance available

___ Seat moved Forward ___ mm from the previous position.

___ Seat moved Forward ___ detent positions from the previous position.

___ Seat moved Forward, Full Forward position reached.

X 23. Passenger foot positioning. (Indicate final position achieved) (S16.3.3.2)

___ 23.1 Place feet flat on the toe board; OR

X 23.2 If the feet cannot be placed flat on the toe board, set the feet perpendicular to the lower leg, and rest the heel as far forward on the floor pan as possible; OR

___ 23.3 If the heels do not touch the floor pan, set the legs to vertical and set the feet parallel to the floor pan.

X 24. Passenger arm/hand positioning. (S16.3.3.3)

X 24.1 Place the dummy's upper arms adjacent to the torso with the arm centerlines as close to a vertical longitudinal plane as possible. (S16.3.2.3.1)

X 24.2 Place the palms of the dummy in contact with the outer part of the thighs (S16.3.3.3.2)

X 24.3 Place the little fingers in contact with the seat cushion. (S16.3.3.3.3)

X 25. Adjustable head restraints

___ N/A, there is no head restraint adjustment

N/A 25.1 If the head restraint has an automatic adjustment, leave it where the system positions the restraint after the dummy is placed in the seat. (S16.3.4.1) Go to 26.

X 25.2 Adjust each head restraint vertically so that the horizontal plane determined in item 3 of Data Sheet 14 is aligned with the center of gravity (CG) of the dummy head. (S16.3.4.3)

X 25.3 If the above position is not attainable, move the vertical center of the head restraint to the closest detent below the center of the head CG. (S16.3.4.3)

___ N/A midpoint position attained in previous step

___ Headrest set at nearest detent below the head CG

___ 25.4 If the head restraint has a fore and aft adjustment, place the restraint in the foremost position or until contact with the head is made, whichever occurs first. (S16.3.4.4)

X 26. Manual belt adjustment (for tests conducted with a belted dummy) S16.3.5

X N/A, **Unbelted test**

__26.1 If an adjustable seat belt D-ring anchorage exists, place it in the manufacturer's design position for a 5th percentile adult female.

This information will be supplied by the COTR.

Manufacturer's specified position _____

Actual Position _____

__26.2 Place the Type 2 manual belt around the test dummy and fasten the latch. (S16.3.5.2)

__26.3 Ensure that the dummy's head remains as level as possible. (S16.3.5.3)

__26.4 Remove all slack from the lap belt. Pull the upper torso webbing out of the retractor and allow it to retract; repeat this operation four times. Apply a 9 N (2 lbf) to 18 N (4 lbf) tension load to the lap belt. If the belt system is equipped with a tension-relieving device, introduce the maximum amount of slack into the upper torso belt that is recommended by the manufacturer. If the belt system is not equipped with a tension-relieving device, allow the excess webbing in the shoulder belt to be retracted by the retractive force of the retractor. (S16.3.5.4)

REMARKS:

I certify that I have read and performed each instruction.

Signature: Chris Howard

Date: 4/1/04

**DUMMY POSITIONING PROCEDURES
FOR REAR PASSENGER TEST DUMMY CONFORMING TO SUBPART E OF PART 572**

IMPACT ANGLE:	Zero Degrees		
BELTED DUMMIES (YES/NO):	No – Front Occupants Yes – Center Rear Passenger		
TEST SPEED:	☒ 32 to 40 kmph	☐ 0 to 48 kmph	☐ 0 to 56 kmph
DRIVER DUMMY:	☒ 5 TH female		☐ 50 th Male
PASSENGER DUMMY:	☒ 5 TH female		☒ 50 th Male Ctr Rear

- X 1. If the seat is a bench seat for which there are no independent adjustments that can be made, Go to step 7.
- ☐ 2. Position the seat's adjustable lumbar supports so that the lumbar support is in its lowest, retracted or deflated adjustment position. (S8.1.3)
☐ N/A – No lumbar adjustment
- ☐ 3. Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S20.1.8.2)
☐ N/A – No additional support adjustment
- ☐ 4. If the seat cushion adjusts fore and aft, independent of the seat back, set this adjustment to the full rearward position. (S20.1.9.3)
☐ N/A – No independent fore-aft seat cushion adjustment
- ☐ 5. If the seat and/or seat cushion height is adjustable, put the seat in the full down height position. (S8.1.2)
☐ N/A – No seat height adjustment
- ☐ 6. Using only the controls that move the seat in the fore-aft direction, place the seat in the rearmost position. (S8.1.2)
- X 7. The seat back angle, if adjustable, is set at the manufacturer's nominal design riding position for a 50th percentile adult male in the manner specified by the manufacturer. (S4.5.4.1 (b) and S8.1.3)
X N/A – No seat back angle adjustment
Manufacturer's design seat back angle _____
Tested seat back angle 5.9° on seat back
- X 8. If adjustable, set the head restraint at the full up and full forward position. Any adjustment of the head restraint shall be used to position it full forward. For example, if it rotates, rotate it such that the head restraint extends as far forward as possible. (S8.1.3)
☐ N/A – No head restraint adjustment
- X 9. Place any adjustable seat belt anchorages at the vehicle manufacturer's nominal design position for a 50th percentile adult male occupant (S8.1.3)
X N/A – No adjustable upper seat belt anchorage
Manufacturer's specified anchorage position. _____
Tested anchorage position _____

- ☒ 10. Place the dummy in the seat such that the midsagittal plane is vertical and coincides with the vertical longitudinal plane that passes through the SgRP and is parallel to the longitudinal centerline of the vehicle and the upper torso rests against the seat back.
- ☒ 11. Rest the thighs on the seat cushion. (S10.5)
- ☒ 12. Position the H-point of the dummy within 0.5 inch of the vertical dimension and 0.5 inch of the horizontal dimension of a point 0.25 inch below the H-point determined by using the equipment and procedures specified in SAE J826 (APR 1980). (S10.4.2.1) Then measure the pelvic angle with respect to the horizontal using the pelvic angle gage. Adjust the dummy position until these three measurements are within the specifications. (S10.4.2.1 and S10.4.2.2)
 25 horizontal inches from the point 0.25 below the determined H-point (0.5 inch max.) (S10.4.2.1)
 36 vertical inches from the point 0.25 below the determined H-point (0.5 inch max.) (S10.4.2.1)
 24.9° pelvic angle (20° to 25°)
- ☒ 13. Is the head level within $\pm 0.5^\circ$? (S10.1)
 ☒ Yes, go to 14
 ___ No, go to 13.1
- ___ 13.1 Adjust the position of the H-point. (S10.1 and S10.4.2.1)
- ___ 13.2 Is the head level within $\pm 0.5^\circ$? (S10.1)
 ___ Yes, record the following, then go to 13. ___ No, go to 12.3 (Same as 12)
 ___ horizontal inches from the point 0.25 below the determined H-point (0.5 inch max.) (S10.4.2.1)
 ___ vertical inches from the point 0.25 below the determined H-point (0.5 inch max.) (S10.4.2.1)
 ___ pelvic angle (20° to 25°) (S10.4.2.2)
- ___ 13.3 Adjust the pelvic angle. (S10.1)
- ___ 13.4 Is the head level within $\pm 0.5^\circ$? (S10.1)
 ___ Yes, record the following, then go to 13. ___ No, go to 12.5
 ___ horizontal inches from the point 0.25 below the determined H-point (0.5 inch max.) (S10.4.2.1)
 ___ vertical inches from the point 0.25 below the determined H-point (0.5 inch max.) (S10.4.2.1)
 ___ pelvic angle (20° to 25°) (S10.4.2.2)
- ___ 13.5 Adjust the neck bracket of the dummy the minimum amount necessary from the non-adjusted "0" setting until the head is level within $\pm 0.5^\circ$. (S10.1)
 Record the following, then go to 13
 ___ horizontal inches from the point 0.25 below the determined H-point (0.5 inch max.) (S10.4.2.1)
 ___ vertical inches from the point 0.25 below the determined H-point (0.5 inch max.) (S10.4.2.1)
 ___ pelvic angle (20° to 25°) (S10.4.2.2)

- X 14. Set the distance between the outboard knee clevis flange surfaces at 10.6 inches.
10.6 " measured distance (Seat track and center console interfere) (S10.5)
- X 15. Check only one of the following that applies:
Outboard seating position
Keeping the right thigh and leg in a vertical plane and the left thigh and leg in a vertical plane, place the feet flat on the floorpan and beneath the front seat as far as possible without front seat interference. If necessary, the distance between the knees can be changed in order to place the feet beneath the seat. Record new distance between the outboard knee clevis flange surfaces if knees have been repositioned.
_____ measured distance (inches)
X Center seating position
Keeping the left thigh and leg in a vertical plane, place the left foot flat on the floorpan on the left side of the transmission tunnel (if present). Keeping the right thigh and leg in a vertical plane, place the right foot flat on the floorpan on the right side of the transmission tunnel. If necessary, the distance between the knees can be changed in order to place the feet flat on the floor. If possible, the knees should remain as close to the distance as measured in #14 above. Record new distance between the outboard knee clevis flange surfaces if knees have been repositioned. 425mm / 16.73" measured distance (inches)
- X 16. Place the left upper arm in contact with the seat back and side of the torso. (S10.2.2)
- X 17. Is the passenger seat belt used for this test?
X Yes, continue
___ No, go to 18
- X 17.1 Fasten the seat belt around the dummy.
- X 17.2 Remove all slack from the lap belt portion. (S10.9)
- X 17.3 Pull the upper torso webbing out of the retractor and allow it to retract; repeat this four times. (S10.9)
- X 17.4 Apply a 2 to 4 pound tension load to the lap belt. (S10.9)
3 pound load applied
- X 17.5 Is the belt system equipped with a tension relieving device?
___ Yes, continue
X No, go to 18
- ___ 17.6 Introduce the maximum amount of slack into the upper torso bet that is recommended by the vehicle manufacturer in the vehicle owner's manual. (S10.9). Go to 17.
- X 18. Place the right upper arm in contact with the seat back and side of the torso. (S10.2.2)
- X 19. Place the left hand palm in contact with the outside of the left thigh and the little finger in contact with the seat cushion. (S10.3.2)
- X 20. Place the right hand palm in contact with the outside of the right thigh and the little finger in contact with the seat cushion. (S10.3.2)

I certify that I have read and performed each instruction.

Signature: Chris Hand

Date: 4/1/04


DATA SHEET 35

DUMMY MEASUREMENTS

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Eric Peschman

NHTSA No.: C40303
 Test Date: 1/28/04

DUMMY MEASUREMENTS FOR FRONT SEAT OCCUPANTS

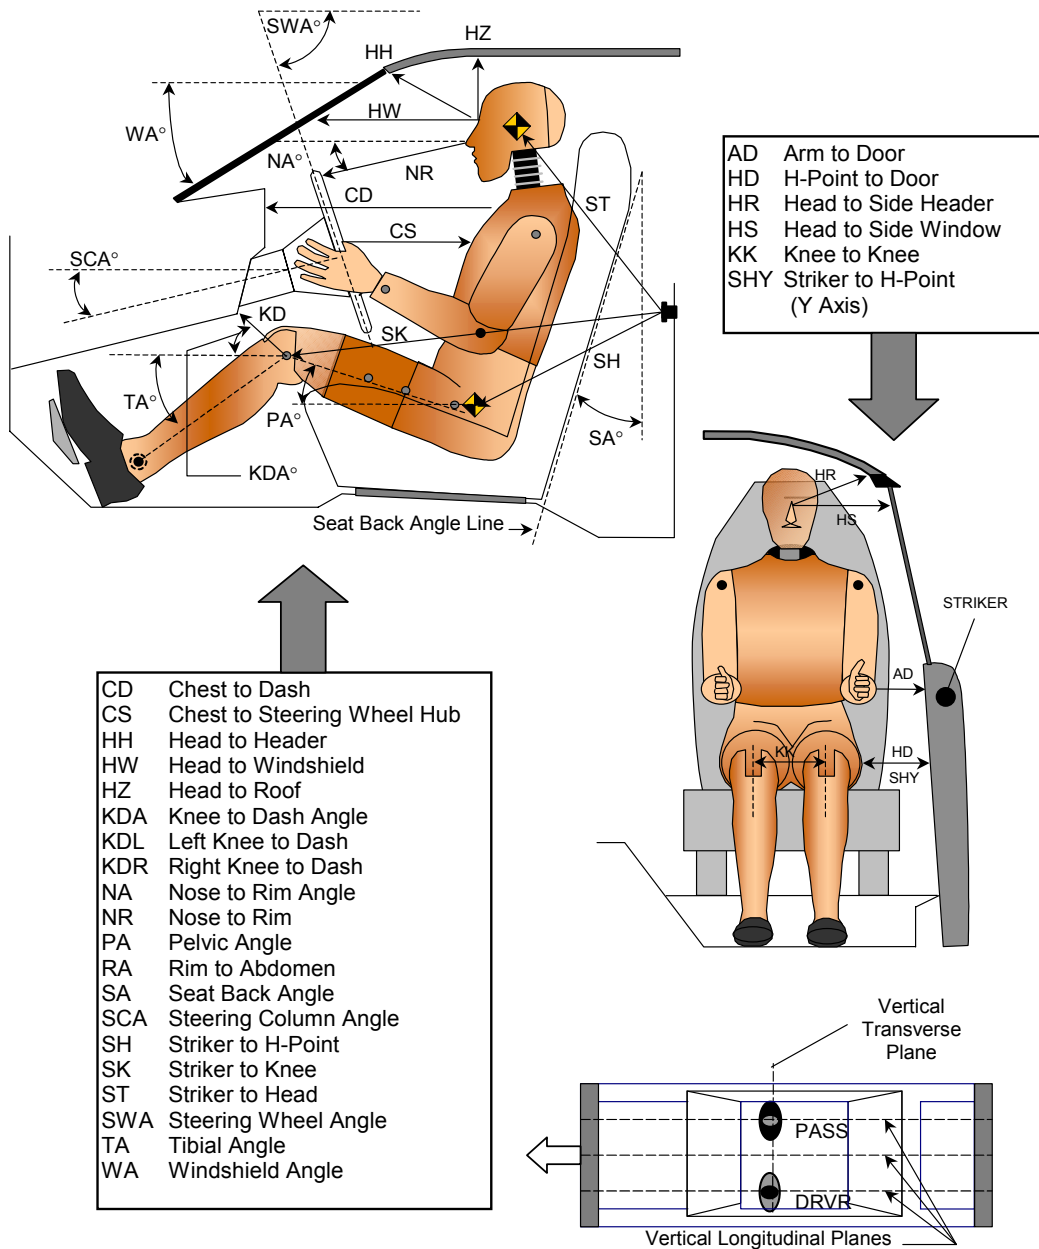

DATA SHEET 35
DUMMY MEASUREMENTS

Test Vehicle: 2004 Dodge Durango
Test Program: FMVSS 208 Compliance
Test Technician: Eric Peschman

NHTSA No.: C40303
Test Date: 4/1/04

TEST DUMMY POSITION MEASUREMENTS

Code	Measurement Description	Driver SN 505		Passenger SN 511	
		Length (mm)	Angle (°)	Length (mm)	Angle (°)
WA	Windshield Angle		30.7		
SWA	Steering Wheel Angle		65.7		
SCA	Steering Column Angle		24.4		
SA	Seat Back Angle		4.9		4.3
HZ	Head to Roof (Z)	209		274	
HH	Head to Header	386		432	
HW	Head to Windshield	692		787	
HR	Head to Side Header (Y)	221		225	
NR	Nose to Rim	260	7.6		
CD	Chest to Dash	434		446	
CS	Chest to Steering Hub	206			
RA	Rim to Abdomen	64			
KDL	Left Knee to Dash	82	33.2	85	
KDR	Right Knee to Dash	79		92	29.3
PA	Pelvic Angle		21.0		20.6
TA	Tibia Angle		77.5		69.1
KK	Knee to Knee (Y)	289		228	
SK	Striker to Knee	679	96.2	606	95.3
ST	Striker to Head	652	20.1	630	14.0
SH	Striker to H-Point	353	95.3	349	95.9
SHY	Striker to H-Point (Y)	295		298	
HS	Head to Side Window	359		357	
HD	H-Point to Door (Y)	210		211	
AD	Arm to Door (Y)	158		156	
AA	Ankle to Ankle	260		160	

DATA SHEET 35 SUPPLIMENTAL
CENTER REAR PASSENGER DUMMY MEASUREMENTS

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Eric Peschman


NHTSA No.: C40303
 Test Date: 4/1/04

TEST DUMMY POSITION MEASUREMENTS (S/N 401)

Measurement Description	Units	Measurement
Head to string plane	mm	578
Chest to string plane	mm	539
Right Knee to string plane	mm	165
Left Knee to string plane	mm	158
Rear Console to string plane	mm	-142
Knee to Knee	mm	425
Right Tibia Angle	degrees	67.9
Left Tibia Angle	degrees	71.1
Pelvic Angle	degrees	24.9

Dummy measurements were taken to a plane defined by a string placed
 between the upper seat belt anchorage points.

SEAT BELT POSITIONING DATA

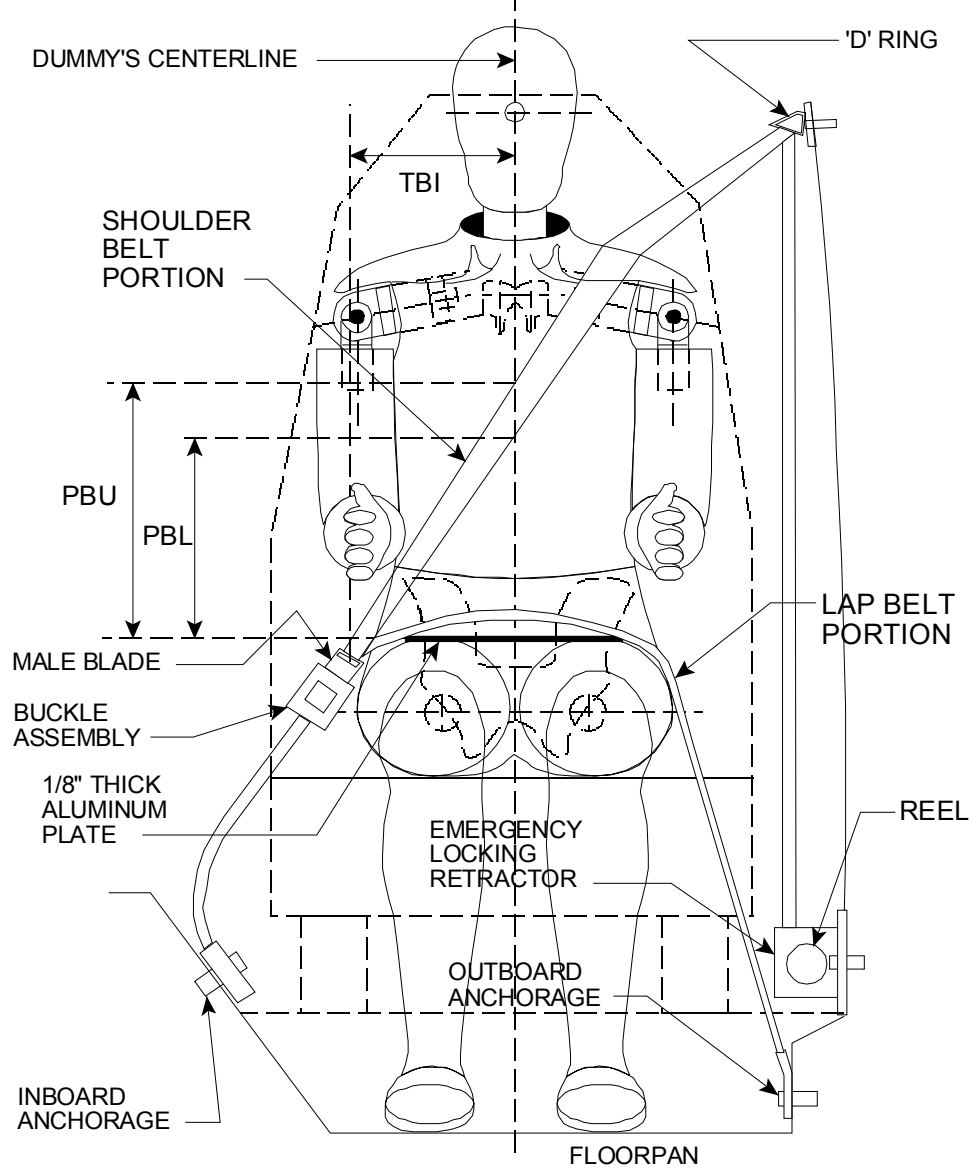

FRONT VIEW OF DUMMY

SEAT BELT POSITIONING MEASUREMENTS

Measurement Description	Units	Driver	Passenger	Rear Passenger
PBU - Top surface of reference to belt upper edge	mm	N/A	N/A	379
PBL - To surface of reference to belt lower edge	mm	N/A	N/A	290

DATA SHEET 36

CRASH TEST

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Eric Peschman

NHTSA No.: C40303
 Test Date: 1/28/04

IMPACT ANGLE:	Zero Degrees		
BELTED DUMMIES (YES/NO):	No – Front Occupants Yes – Center Rear Passenger		
TEST SPEED:	<u>X</u> 32 to 40 kmph	<u> </u> 0 to 48 kmph	<u> </u> 0 to 56 kmph
DRIVER DUMMY:	<u>X</u> 5 TH female	<u> </u> 50 th Male	
PASSENGER DUMMY:	<u>X</u> 5 TH female	<u>X</u> 50 th Male Ctr Rear	

- ☒ 1. Vehicle underbody painted
- ☒ 2. The speed measuring devices are in place and functioning.
- ☒ 3. The speed measuring devices are 1.0 m from the barrier (spec. 1.5m) and 30 cm from the barrier (spec. is 30 cm)
- ☒ 4. Convertible top is in the closed position.
- ☒ N/A, not a convertible
- ☒ 5. Instrumentation and wires are placed so the motion of the dummies during impact is not affected.
- ☒ 6. Tires inflated to pressure on tire placard or if it does not have a tire placard because it is not a passenger car, then inflated to the tire pressure specified in the owner information.

231 kpa front left tire 231 kpa specified on tire placard or in owner information
231 kpa front right tire 231 kpa specified on tire placard or in owner information
231 kpa rear left tire 231 kpa specified on tire placard or in owner information
231 kpa rear right tire 231 kpa specified on tire placard or in owner information

- ☒ 7. Time zero contacts on barrier in place.
- ☒ 8. Pre test zero and shunt calibration adjustments performed and recorded
- ☒ 9. Dummy temperature meets requirements of section 12.2 of the test procedure.
- ☒ 10. Vehicle hood closed and latched
- ☒ 11. Transmission placed in neutral
- ☒ 12. Parking brake off
- ☒ 13. Ignition in the ON position
- ☒ 14. Doors closed and latched but not locked
- ☒ 15. Posttest zero and shunt calibration checks performed and recorded
- ☒ 16. Actual test speed 39.6 kmph
- ☒ 17. Vehicle rebound from the barrier 56.1 cm
- ☒ 18. Describe whether the doors open after the test and what method is used to open the doors.
 - ☒ Left Front Door: Door remained closed and latched; Door opened without tools
 - ☒ Right Front Door: Door remained closed and latched; Door opened without tools
 - ☒ Left Rear Door: Door remained closed and latched; Door opened without tools

☒ Right Rear Door: Door remained closed and latched; Door opened without tools

☒ 19. Describe the contact points of the dummy with the interior of the vehicle.

☒ Driver Dummy: Head to Air Bag and Headliner/Visor; Chest and Abdomen to Air Bag; Knees to Knee Bolster

☒ Passenger Dummy: Head to Air Bag and Sunvisor; Chest and Abdomen to Air Bag; Knees to Glove Box

☒ Center Rear Passenger Dummy: Back of Head to Headrest; Left Knee to Center Console

REMARKS:

I certify that I have read and performed each instruction.

Signature: 

Date: 4/1/04

DATA SHEET NO. 38

ACCIDENT INVESTIGATION DIVISION DATA

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Eric Peschman

NHTSA No.: C40303
 Test Date: 4/1/04

IMPACT ANGLE:	Zero Degrees		
BELTED DUMMIES (YES/NO):	No – Front Occupants Yes – Center Rear Passenger		
TEST SPEED:	☒ 32 to 40 kmph	☐ 0 to 48 kmph	☐ 0 to 56 kmph
DRIVER DUMMY:	☒ 5 TH female	☐ 50 th Male	
PASSENGER DUMMY:	☒ 5 TH female	☒ 50 th Male Ctr Rear	

Vehicle Year/Make/Model/Body Style:	2004 DODGE DURANGO MPV
VIN:	1D4HD48N04F114309
Wheelbase:	3035 mm
Build Date:	10/03
Vehicle Size Category:	5
Test Weight:	2451.7 kg
Front Overhang:	1008 mm
Overall Width:	1891 mm
Overall Length Center:	4913 mm

Accelerometer Data	
Location:	As per measurements on Data Sheet 31
Linearity:	>99.9%

Integration Algorithm:	Trapezoidal
Vehicle Impact Speed:	39.6 kmph
Time of Separation:	90.2 ms
Velocity Change:	44.6 kmph

CRUSH PROFILE

Collision Deformation Classification: 12FDEW6
Midpoint of Damage: Vehicle Longitudinal Centerline
Damage Region Length (mm): 1676
Impact Mode: Frontal Barrier

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
C1	Crush zone 1 at left side	mm	4913	4755	158
C2	Crush zone 2 at left side	mm	5026	4834	192
C3	Crush zone 3 at left side	mm	5065	4845	220
C4	Crush zone 4 at right side	mm	5066	4818	248
C5	Crush zone 5 at right side	mm	5025	4790	235
C6	Crush zone 6 at right side	mm	4911	4738	173
L	Width	mm	1676	1672	4
N/A	Crush at vehicle centerline	mm	5079	4850	229

REMARKS:

I certify that I have read and performed each instruction.

Signature:



Date:

4/1/04

DATA SHEET 39
WINDSHIELD MOUNTING (FMVSS 212)

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Clark Subrt

NHTSA No.: C40303
 Test Date: 4/1/04

IMPACT ANGLE:	Zero Degrees		
BELTED DUMMIES (YES/NO):	No – Front Occupants Yes – Center Rear Passenger		
TEST SPEED:	☒ 32 to 40 kmph	☐ 0 to 48 kmph	☐ 0 to 56 kmph
DRIVER DUMMY:	☒ 5 TH female		☐ 50 th Male
PASSENGER DUMMY:	☒ 5 TH female		☒ 50 th Male Ctr Rear


- ☒ 1. Pre-Crash
- ☒ 1.1 Describe from visual inspection how the windshield is mounted and describe any trim material.
- Retained with glue
Rubber trim
- ☒ 1.2 Mark the longitudinal centerline of the windshield
- ☒ 1.3 Measure pre-crash A, B, and C for the left side and record in the chart below.
- ☒ 1.4 Measure pre-crash C, D, and E for the right side and record in the chart below.
- ☒ 1.5 Measure from the edge of the retainer or molding to the edge of the windshield.
- ☒ Dimension G (mm): 14
- ☐ 2. Post Crash
- ☒ 2.1 Can a single thickness of copier type paper (as small a piece as necessary) slide between the windshield and the vehicle body?
- ☒ No – Pass. Skip to the table of measurements, complete it by repeating the pre-crash measurements in the post crash column, and calculate the retention percentage, which will be 100%.
- ☐ Yes, go to 2.2
- ☐ 2.2 Visibly mark the beginning and end of the portions of the periphery where the paper slides between the windshield and the vehicle body.
- ☐ 2.3 Measure and record post-crash A, B, C, D, E, and F such that the measurements do not include any of the parts of the windshield where the paper slides between the windshield and the vehicle body.
- ☐ 2.4 Calculate and record the percent retention for the right and left side of the windshield.
- ☐ 2.5 Is total right side percent retention less than 75%?
- ☐ Yes, Fail
- ☐ No, Pass
- ☐ 2.6 Is total left side percent retention less than 75%?
- ☐ Yes, Fail
- ☐ No, Pass

WINDSHIELD RETENTION MEASUREMENTS

	Dimension	Pre-Crash (mm)	Post-Crash (mm)	Percent Retention (Post-Test ÷ Pre-Crash)
Left Side	A	632	632	100%
	B	871	871	100%
	C	792	792	100%
	Total	2295	2295	100%
Right Side	D	632	632	100%
	E	871	871	100%
	F	792	792	100%
	Total	2295	2295	100%

Indicate area of mounting failure. NONE

FRONT VIEW OF WINDSHIELD

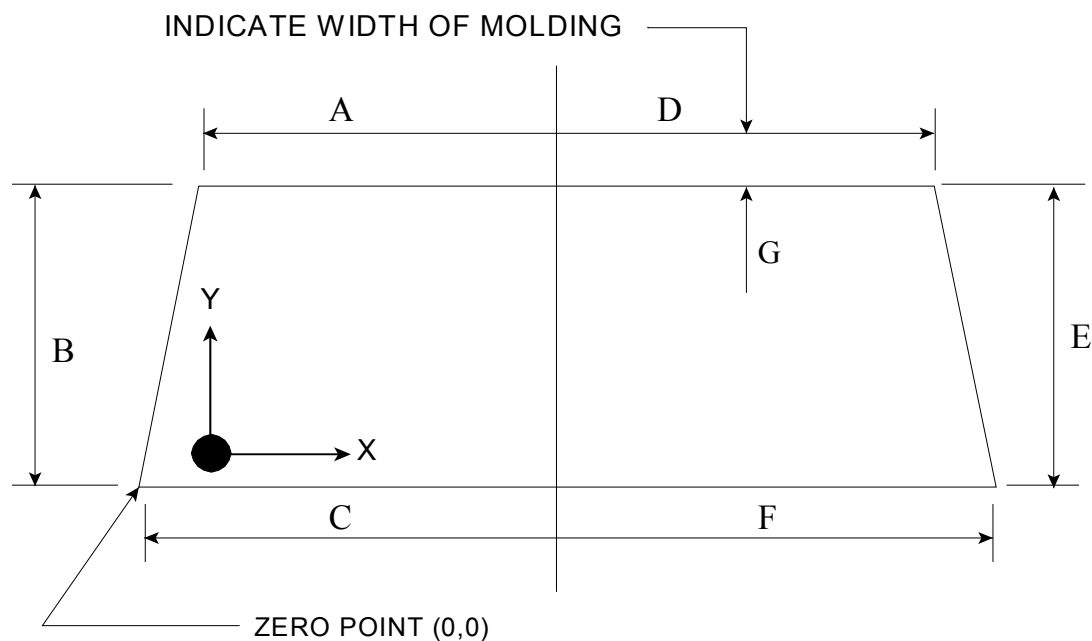

REMARKS:

I certify that I have read and performed each instruction.

Signature: Clark Subit

Date: 4/1/04

DATA SHEET 40
WINDSHIELD ZONE INTRUSION (FMVSS 219)


Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance
 Test Technician: Clark Subrt

NHTSA No.: C40303
 Test Date: 4/1/04

IMPACT ANGLE:	Zero Degrees		
BELTED DUMMIES (YES/NO):	No – Front Occupants Yes – Center Rear Passenger		
TEST SPEED:	☒ 32 to 40 kmph	☐ 0 to 48 kmph	☐ 0 to 56 kmph
DRIVER DUMMY:	☒ 5 TH female		☐ 50 th Male
PASSENGER DUMMY:	☒ 5 TH female	☒ 50 th Male Ctr Rear	

- ☒ 1. Place a 165 mm diameter rigid sphere, with a mass of 6.8 kg on the instrument panel so that it is simultaneously touching the instrument panel and the windshield. (571.219 S6.1(a))
- ☒ 2. Roll the sphere from one side of the windshield to the other while marking on the windshield where the sphere contacts the windshield. (571.219 S6.1(b))
- ☒ 3. From the outermost contactable points on the windshield draw a horizontal line to the edges of the windshield. (571.219 S6.1(b))
- ☒ 4. Draw a line on the inner surface of the windshield that is 13 mm below the line determined in items 2 and 3
- ☒ 5. After the crash test, record any points where a part of the exterior of the vehicle has marked, penetrated, or broken the windshield.

Provide all dimensions necessary to reproduce the protected area.

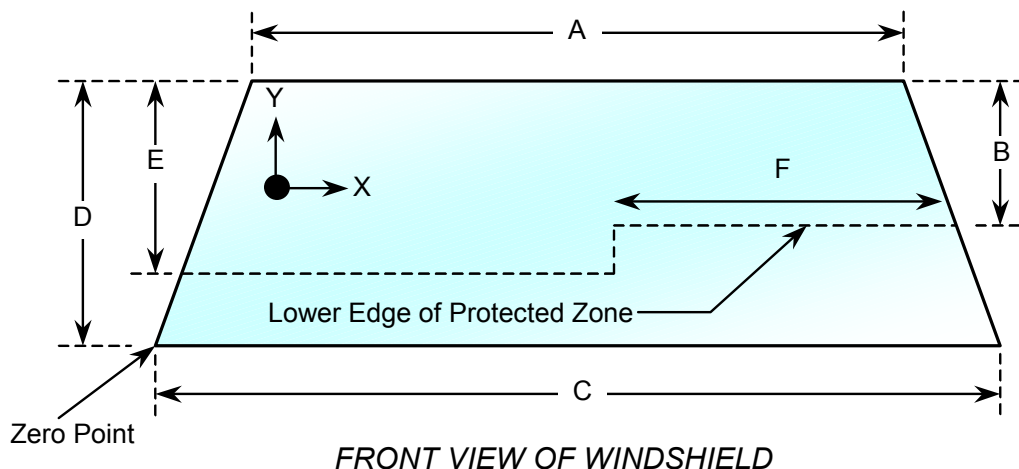

WINDSHIELD DIMENSIONS

Item	Units	Value
A	mm	1264
B	mm	513
C	mm	1584
D	mm	871
E	mm	570
F	mm	591

AREA OF PROTECTED ZONE FAILURES:

- B. Provide coordinates of the area that the protected zone was penetrated more than 0.25 inches by a vehicle component other than one which is normally in contact with the windshield.

X	Y
NONE	

- C. Provide coordinates of the area beneath the protected zone template that the inner surface of the windshield was penetrated by a vehicle component.

X	Y
NONE	

REMARKS:

I certify that I have read and performed each instruction.

Signature: Clark Subit

Date: 4/1/04

DATA SHEET 41
FUEL SYSTEM INTEGRITY (FMVSS 301)

Test Vehicle: 2004 Dodge Durango
Test Program: FMVSS 208 Compliance
Test Technician: Eric Peschman

NHTSA No.: C40303
Test Date: 4/1/04

TYPE OF IMPACT:	25 mph Unbelted Flat Frontal
-----------------	------------------------------

Stoddard Solvent Spillage Measurements


- A. From impact until vehicle motion ceases: 0.0 grams
(Maximum Allowable = 28 grams)
- B. For the 5 minute period after motion ceases: 0.0 grams
(Maximum Allowable = 142 grams)
- C. For the following 25 minutes: 0.0 grams
(Maximum Allowable = 28 grams/minute)
- D. Spillage: NONE

REMARKS: NO SPILLAGE

DATA SHEET NO. 41
FMVSS 301 STATIC ROLLOVER DATA

Test Vehicle: 2004 Dodge Durango
 Test Program: FMVSS 208 Compliance

NHTSA No.: C40303
 Test Date: 4/1/04

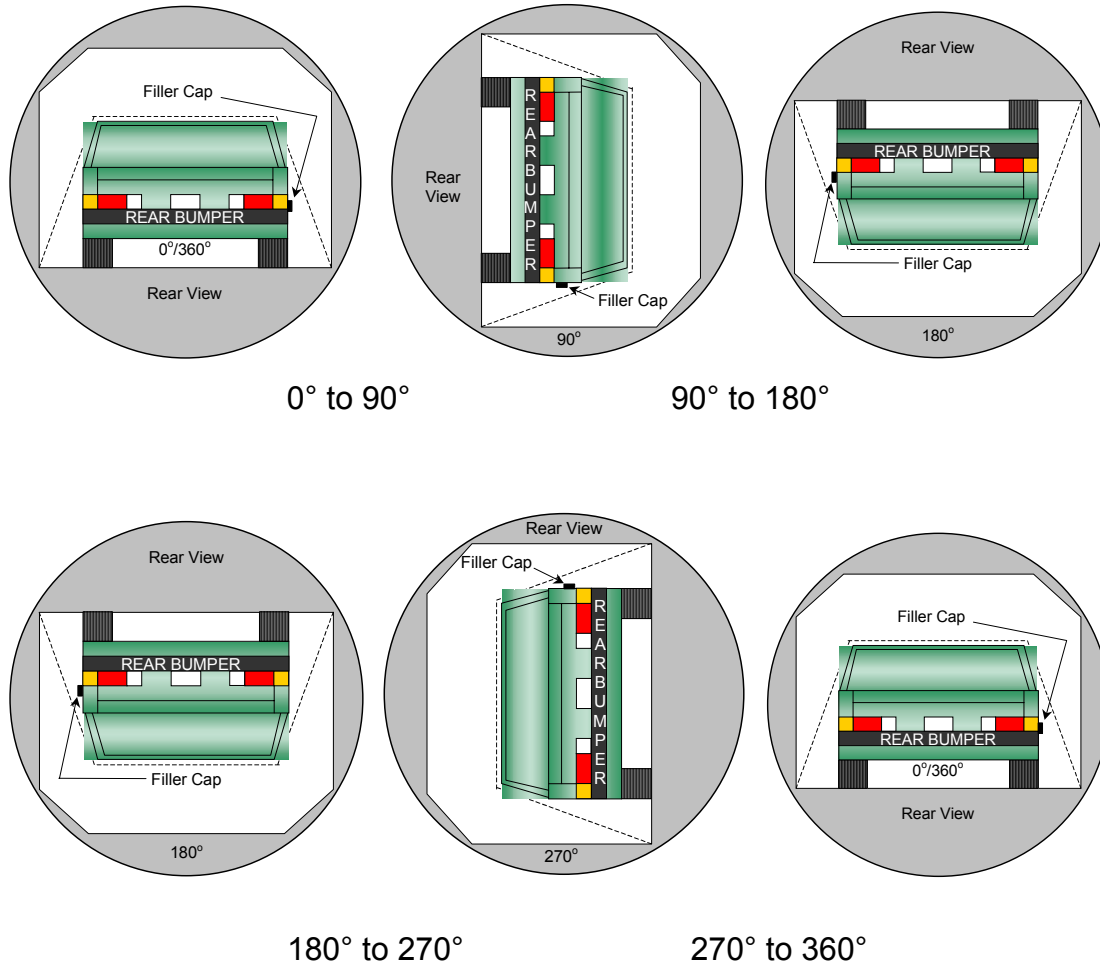

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.
2. The position hold time at each position is 300 seconds (minimum).
3. Details of Stoddard Solvent spillage locations: None

Test Phase	Rotation Time (sec.)	Hold Time (sec.)	Spillage (grams)
0° to 90°	170	300	0.0
90° to 180°	151	300	0.0
180° to 270°	140	300	0.0
270° to 360°	164	300	0.0

APPENDIX A
CRASH TEST DATA

TABLE OF DATA PLOTS

		<u>Page No.</u>
Figure No. 1.	Driver Head X Acceleration vs. Time	A-1
Figure No. 2.	Driver Head Y Acceleration vs. Time	A-1
Figure No. 3.	Driver Head Z Acceleration vs. Time	A-1
Figure No. 4.	Driver Head Resultant Acceleration vs. Time	A-1
Figure No. 5.	Driver Head X Velocity vs. Time	A-2
Figure No. 6.	Driver Head Y Velocity vs. Time	A-2
Figure No. 7.	Driver Head Z Velocity vs. Time	A-2
Figure No. 8.	Driver Neck Force X vs. Time	A-3
Figure No. 9.	Driver Neck Force Y vs. Time	A-3
Figure No. 10.	Driver Neck Force Z vs. Time	A-3
Figure No. 11.	Driver Neck Force Resultant vs. Time	A-3
Figure No. 12.	Driver Neck Moment X vs. Time	A-4
Figure No. 13.	Driver Neck Moment Y vs. Time	A-4
Figure No. 14.	Driver Neck Moment Z vs. Time	A-4
Figure No. 15.	Driver Neck Moment Resultant vs. Time	A-4
Figure No. 16.	Driver Chest X Acceleration vs. Time	A-5
Figure No. 17.	Driver Chest Y Acceleration vs. Time	A-5
Figure No. 18.	Driver Chest Z Acceleration vs. Time	A-5
Figure No. 19.	Driver Chest Resultant Acceleration vs. Time	A-5
Figure No. 20.	Driver Chest X Velocity vs. Time	A-6
Figure No. 21.	Driver Chest Y Velocity vs. Time	A-6
Figure No. 22.	Driver Chest Z Velocity vs. Time	A-6
Figure No. 23.	Driver Chest Displacement vs. Time	A-6
Figure No. 24.	Driver Left Femur Force vs. Time	A-7
Figure No. 25.	Driver Right Femur Force vs. Time	A-7
Figure No. 26.	Driver Left Upper Tibia Moment X vs. Time	A-8
Figure No. 27.	Driver Left Upper Tibia Moment Y vs. Time	A-8
Figure No. 28.	Driver Left Upper Tibia Force X vs. Time	A-8
Figure No. 29.	Driver Left Upper Tibia Force Z vs. Time	A-8

		<u>Page No.</u>
Figure No. 30.	Driver Left Lower Tibia Moment X vs. Time	A-9
Figure No. 31.	Driver Left Lower Tibia Moment Y vs. Time	A-9
Figure No. 32.	Driver Left Lower Tibia Force X vs. Time	A-10
Figure No. 33.	Driver Left Lower Tibia Force Y vs. Time	A-10
Figure No. 34.	Driver Left Lower Tibia Force Z vs. Time	A-10
Figure No. 35.	Driver Right Upper Tibia Moment X vs. Time	A-11
Figure No. 36.	Driver Right Upper Tibia Moment Y vs. Time	A-11
Figure No. 37.	Driver Right Upper Tibia Force X vs. Time	A-11
Figure No. 38.	Driver Right Upper Tibia Force Z vs. Time	A-11
Figure No. 39.	Driver Right Lower Tibia Moment X vs. Time	A-12
Figure No. 40.	Driver Right Lower Tibia Moment Y vs. Time	A-12
Figure No. 41.	Driver Right Lower Tibia Force X vs. Time	A-13
Figure No. 42.	Driver Right Lower Tibia Force Y vs. Time	A-13
Figure No. 43.	Driver Right Lower Tibia Force Z vs. Time	A-13
Figure No. 44.	Driver Left Tibia Mid-Shaft X Acceleration vs. Time	A-14
Figure No. 45.	Driver Left Tibia Mid-Shaft Y Acceleration vs. Time	A-14
Figure No. 46.	Driver Right Tibia Mid-Shaft X Acceleration vs. Time	A-14
Figure No. 47.	Driver Right Tibia Mid-Shaft Y Acceleration vs. Time	A-14
Figure No. 48.	Driver Right Mid-Foot X Acceleration vs. Time	A-15
Figure No. 49.	Driver Right Mid-Foot Y Acceleration vs. Time	A-15
Figure No. 50.	Driver Right Mid-Foot Z Acceleration vs. Time	A-15
Figure No. 51.	Driver Right Mid-Foot Resultant Acceleration vs. Time	A-15
Figure No. 52.	Driver Left Mid-Foot X Acceleration vs. Time	A-16
Figure No. 53.	Driver Left Mid-Foot Y Acceleration vs. Time	A-16
Figure No. 54.	Driver Left Mid-Foot Z Acceleration vs. Time	A-16
Figure No. 55.	Driver Left Mid-Foot Resultant Acceleration vs. Time	A-16
Figure No. 56.	Driver Left Dorsi/Plantar Flexion Degree vs. Time	A-17
Figure No. 57.	Driver Left Inversion/Eversion Degree vs. Time	A-17
Figure No. 58.	Driver Left Internal/External Degree vs. Time	A-17
Figure No. 59.	Driver Right Dorsi/Plantar Flexion Degree vs. Time	A-18

	<u>Page No.</u>
Figure No. 60. Driver Right Inversion/Eversion Degree vs. Time	A-18
Figure No. 61. Driver Right Internal/External Degree vs. Time	A-18
Figure No. 62. Passenger Head X Acceleration vs. Time	A-19
Figure No. 63. Passenger Head Y Acceleration vs. Time	A-19
Figure No. 64. Passenger Head Z Acceleration vs. Time	A-19
Figure No. 65. Passenger Head Resultant Acceleration vs. Time	A-19
Figure No. 66. Passenger Head X Velocity vs. Time	A-20
Figure No. 67. Passenger Head Y Velocity vs. Time	A-20
Figure No. 68. Passenger Head Z Velocity vs. Time	A-20
Figure No. 69. Passenger Neck Force X vs. Time	A-21
Figure No. 70. Passenger Neck Force Y vs. Time	A-21
Figure No. 71. Passenger Neck Force Z vs. Time	A-21
Figure No. 72. Passenger Neck Force Resultant vs. Time	A-21
Figure No. 73. Passenger Neck Moment X vs. Time	A-22
Figure No. 74. Passenger Neck Moment Y vs. Time	A-22
Figure No. 75. Passenger Neck Moment Z vs. Time	A-22
Figure No. 76. Passenger Neck Moment Resultant vs. Time	A-22
Figure No. 77. Passenger Chest X Acceleration vs. Time	A-23
Figure No. 78. Passenger Chest Y Acceleration vs. Time	A-23
Figure No. 79. Passenger Chest Z Acceleration vs. Time	A-23
Figure No. 80. Passenger Chest Resultant Acceleration vs. Time	A-23
Figure No. 81. Passenger Chest X Velocity vs. Time	A-24
Figure No. 82. Passenger Chest Y Velocity vs. Time	A-24
Figure No. 83. Passenger Chest Z Velocity vs. Time	A-24
Figure No. 84. Passenger Chest Displacement vs. Time	A-24
Figure No. 85. Passenger Left Femur Force vs. Time	A-25
Figure No. 86. Passenger Right Femur Force vs. Time	A-25
Figure No. 87. CRP Head X Acceleration vs. Time	A-26
Figure No. 88. CRP Head Y Acceleration vs. Time	A-26
Figure No. 89. CRP Head Z Acceleration vs. Time	A-26

	<u>Page No.</u>
Figure No. 90. CRP Head Resultant Acceleration vs. Time	A-26
Figure No. 91. CRP Head X Velocity vs. Time	A-27
Figure No. 92. CRP Head Y Velocity vs. Time	A-27
Figure No. 93. CRP Head Z Velocity vs. Time	A-27
Figure No. 94. CRP Neck Force X vs. Time	A-28
Figure No. 95. CRP Neck Force Y vs. Time	A-28
Figure No. 96. CRP Neck Force Z vs. Time	A-28
Figure No. 97. CRP Neck Force Resultant vs. Time	A-28
Figure No. 98. CRP Neck Moment X vs. Time	A-29
Figure No. 99. CRP Neck Moment Y vs. Time	A-29
Figure No. 100. CRP Neck Moment Z vs. Time	A-29
Figure No. 101. CRP Neck Moment Resultant vs. Time	A-29
Figure No. 102. CRP Chest X Acceleration vs. Time	A-30
Figure No. 103. CRP Chest Y Acceleration vs. Time	A-30
Figure No. 104. CRP Chest Z Acceleration vs. Time	A-30
Figure No. 105. CRP Chest Resultant Acceleration vs. Time	A-30
Figure No. 106. CRP Chest X Velocity vs. Time	A-31
Figure No. 107. CRP Chest Y Velocity vs. Time	A-31
Figure No. 108. CRP Chest Z Velocity vs. Time	A-31
Figure No. 109. CRP Chest Displacement vs. Time	A-31
Figure No. 110. CRP Right Femur Force vs. Time	A-32
Figure No. 111. CRP Left Femur Force vs. Time	A-32
Figure No. 112. CRP Shoulder Belt Force vs. Time	A-33
Figure No. 113. CRP Lap Belt Force vs. Time	A-33
Figure No. 114. CRP Belt Spoolout vs. Time	A-33
Figure No. 115. Driver Nij (N_{TF}) vs. Time	A-34
Figure No. 116. Driver Nij (N_{TE}) vs. Time	A-34
Figure No. 117. Driver Nij (N_{CF}) vs. Time	A-34
Figure No. 118. Driver Nij (N_{CE}) vs. Time	A-34
Figure No. 119. Passenger Nij (N_{TF}) vs. Time	A-35





	<u>Page No.</u>
Figure No. 120. Passenger Nij (N_{TE}) vs. Time	A-35
Figure No. 121. Passenger Nij (N_{CF}) vs. Time	A-35
Figure No. 122. Passenger Nij (N_{CE}) vs. Time	A-35
Figure No. 123. Center Nij (N_{TF}) vs. Time	A-36
Figure No. 124. Center Nij (N_{TE}) vs. Time	A-36
Figure No. 125. Center Nij (N_{CF}) vs. Time	A-36
Figure No. 126. Center Nij (N_{CE}) vs. Time	A-36
Figure No. 127. Driver Occipital Condyle Moment vs. Time	A-37
Figure No. 128. Passenger Occipital Condyle Moment vs. Time	A-37
Figure No. 129. Center Occipital Condyle Moment vs. Time	A-37
Figure No. 130. Left Rear Seat Crossmember X Acceleration vs. Time	A-38
Figure No. 131. Left Rear Seat Crossmember X Velocity vs. Time	A-38
Figure No. 132. Right Rear Seat Crossmember X Acceleration vs. Time	A-38
Figure No. 133. Right Rear Seat Crossmember X Velocity vs. Time	A-38
Figure No. 134. Top of Engine X Acceleration vs. Time	A-39
Figure No. 135. Top of Engine X Velocity vs. Time	A-39
Figure No. 136. Bottom of Engine X Acceleration vs. Time	A-39
Figure No. 137. Bottom of Engine X Velocity vs. Time	A-39
Figure No. 138. Left Brake Caliper X Acceleration vs. Time	A-40
Figure No. 139. Left Brake Caliper X Velocity vs. Time	A-40
Figure No. 140. Right Brake Caliper X Acceleration vs. Time	A-40
Figure No. 141. Right Brake Caliper X Velocity vs. Time	A-40
Figure No. 142. Instrument Panel X Acceleration vs. Time	A-41
Figure No. 143. Instrument Panel X Velocity vs. Time	A-41
Figure No. 144. Trunk Z Acceleration vs. Time	A-41
Figure No. 145. Trunk Z Velocity vs. Time	A-41
Figure No. 146. MHD Left Rate vs. Time	A-42
Figure No. 147. MHD Right Rate vs. Time	A-42
Figure No. 148. Barrier Force – Upper Left vs. Time	A-43
Figure No. 149. Barrier Force – Upper Center vs. Time	A-43




		<u>Page No.</u>
Figure No. 150.	Barrier Force – Upper Right vs. Time	A-43
Figure No. 151.	Barrier Force – Lower Left vs. Time	A-44
Figure No. 152.	Barrier Force – Lower Center vs. Time	A-44
Figure No. 153.	Barrier Force – Lower Right vs. Time	A-44
Figure No. 154.	Barrier Force – Sum Left vs. Time	A-45
Figure No. 155.	Barrier Force – Sum Center vs. Time	A-45
Figure No. 156.	Barrier Force – Sum Right vs. Time	A-45
Figure No. 157.	Barrier Force – Sum All vs. Time	A-45
Figure No. 158.	Barrier Force – Sum All vs. Average Seat X-member Displacement	A-46



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO

Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

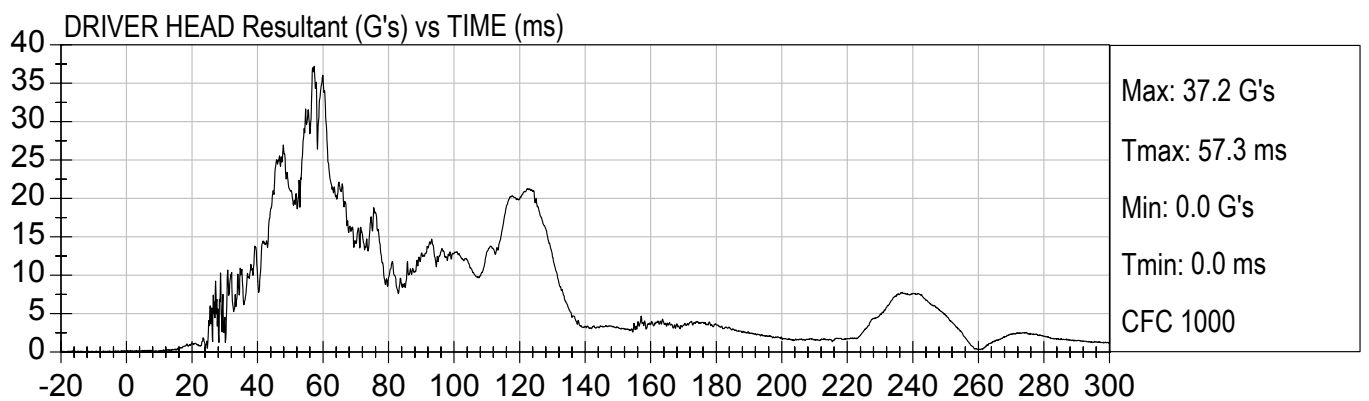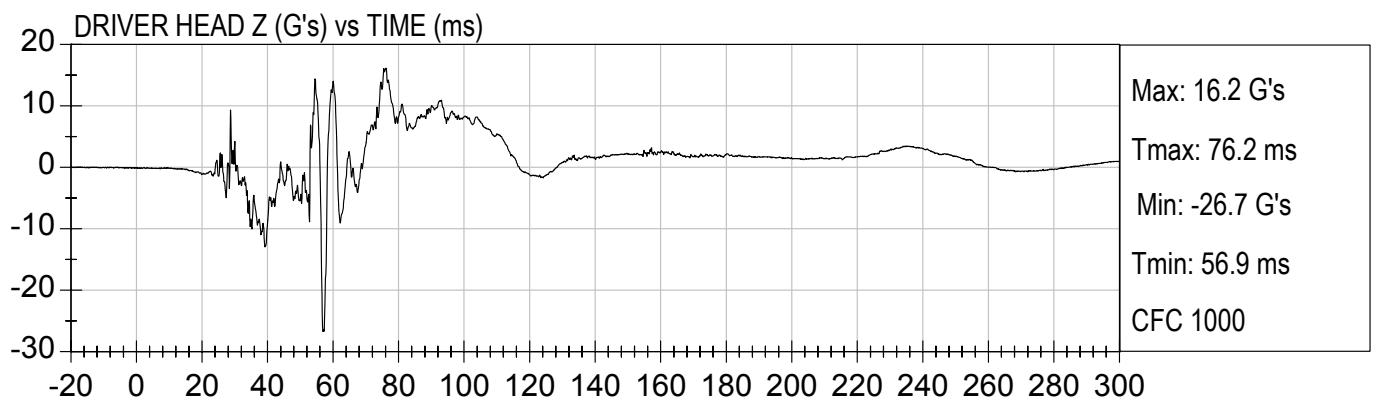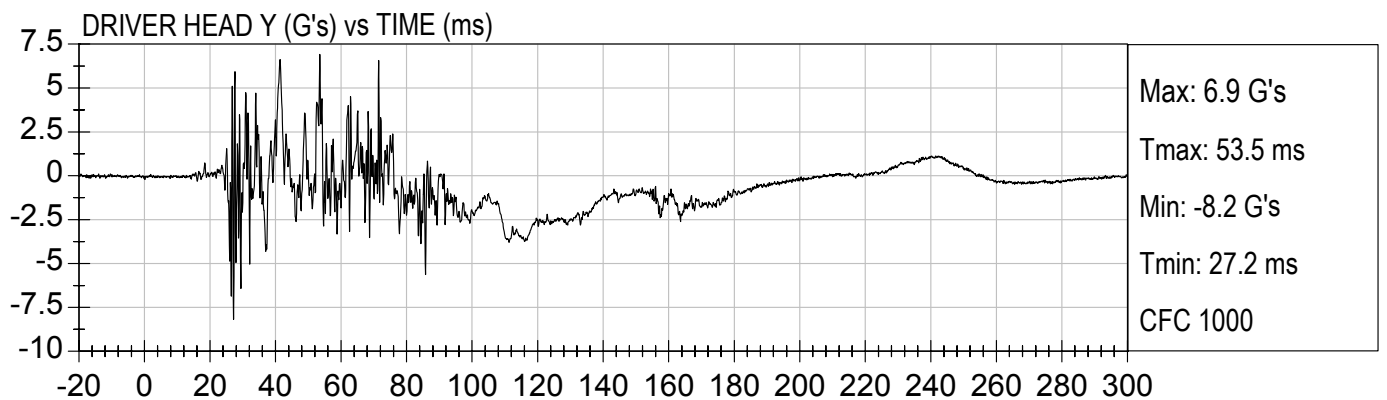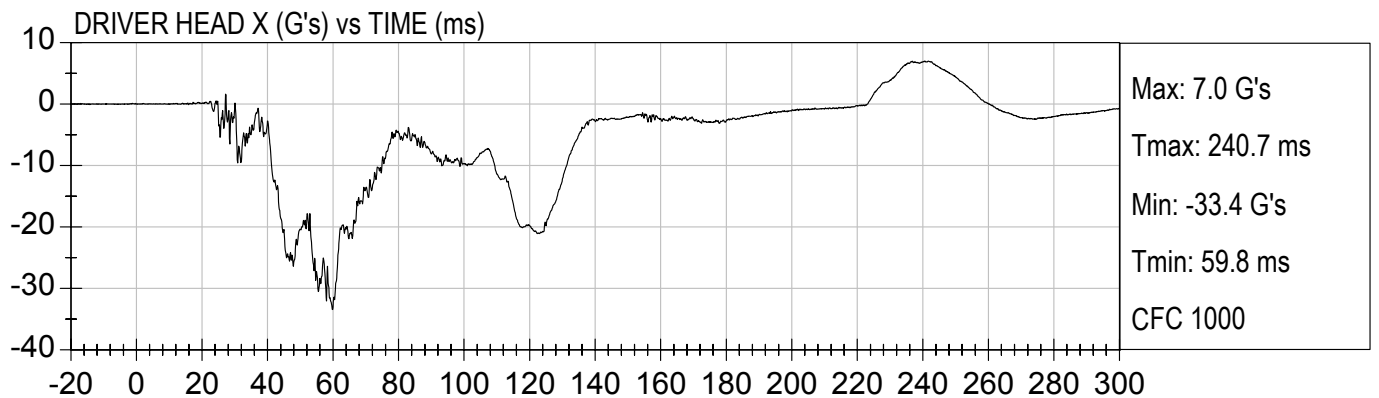

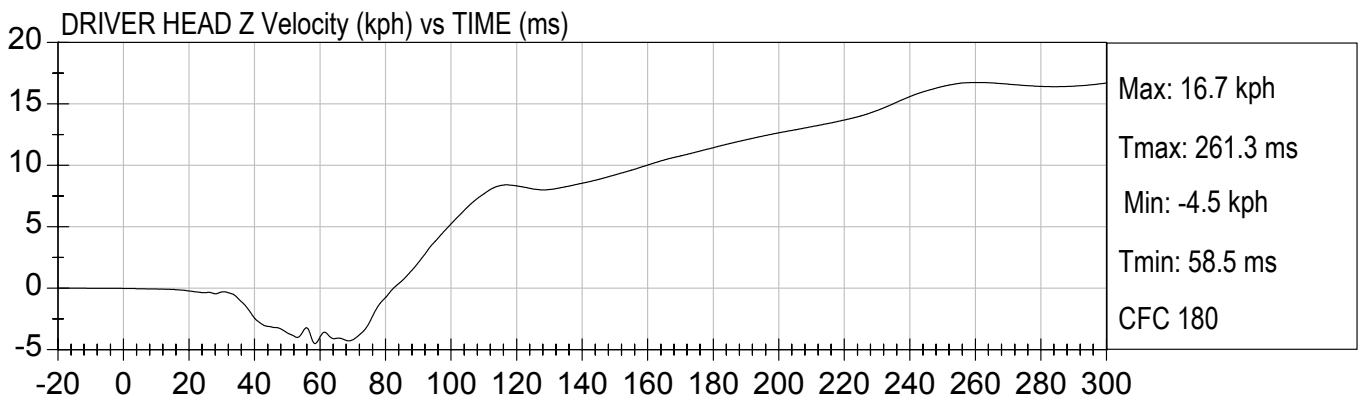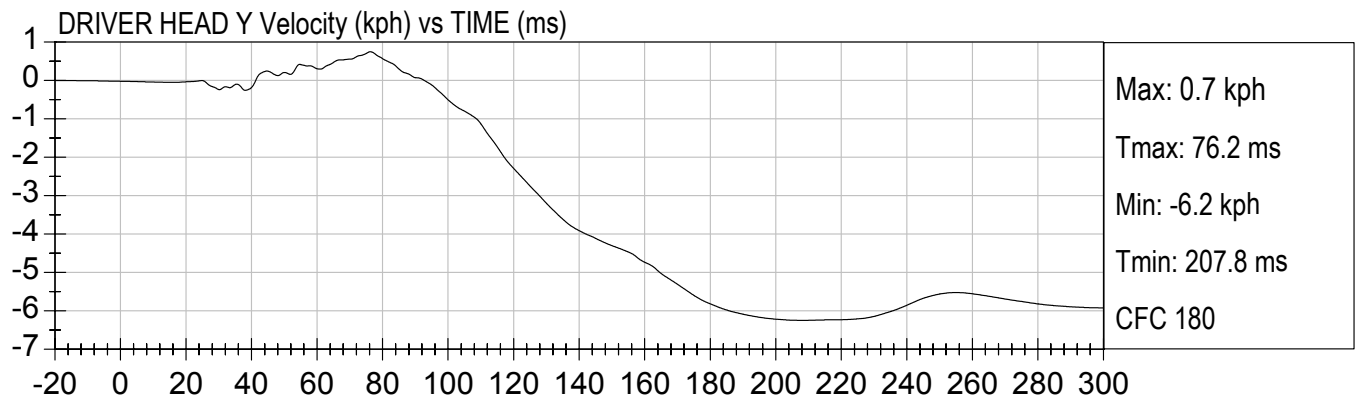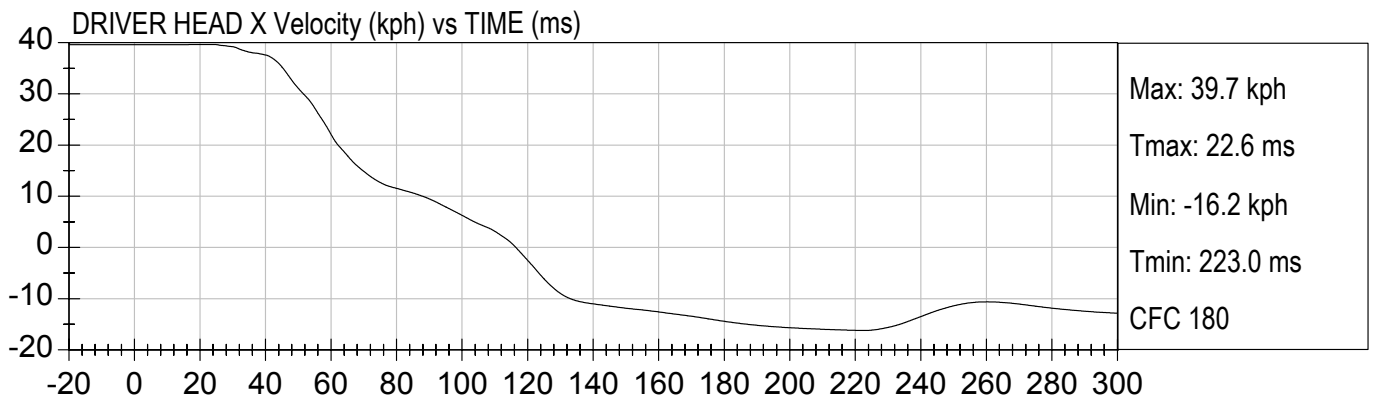





25MPH FRONTAL UNBELTED
2004 DODGE DURANGO

Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)


DRIVER NECK FX (N) vs TIME (ms)

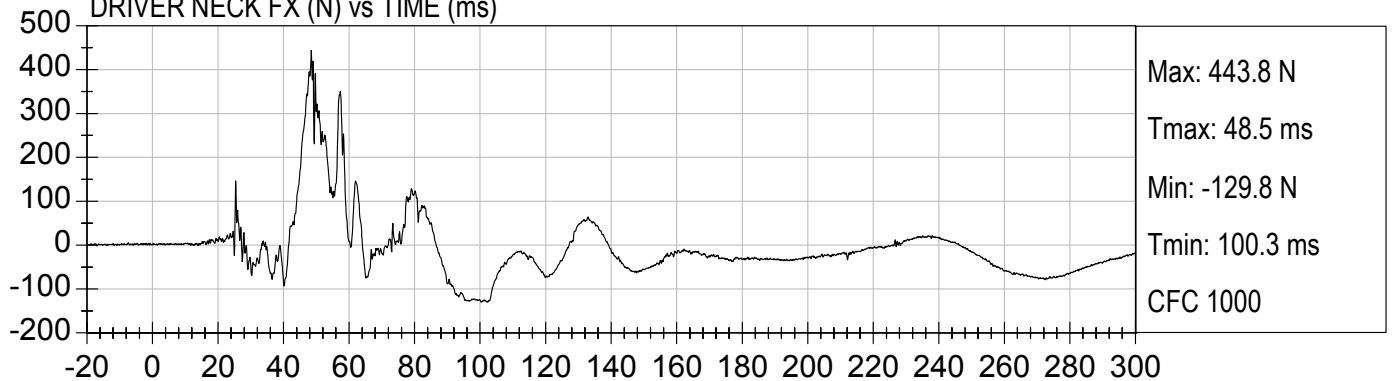


DRIVER NECK FY (N) vs TIME (ms)

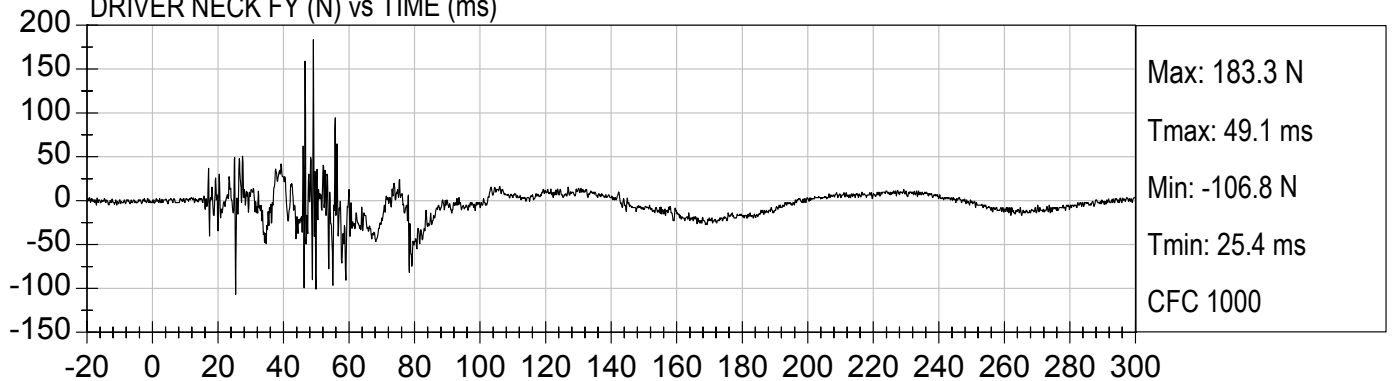

DRIVER NECK FZ (N) vs TIME (ms)

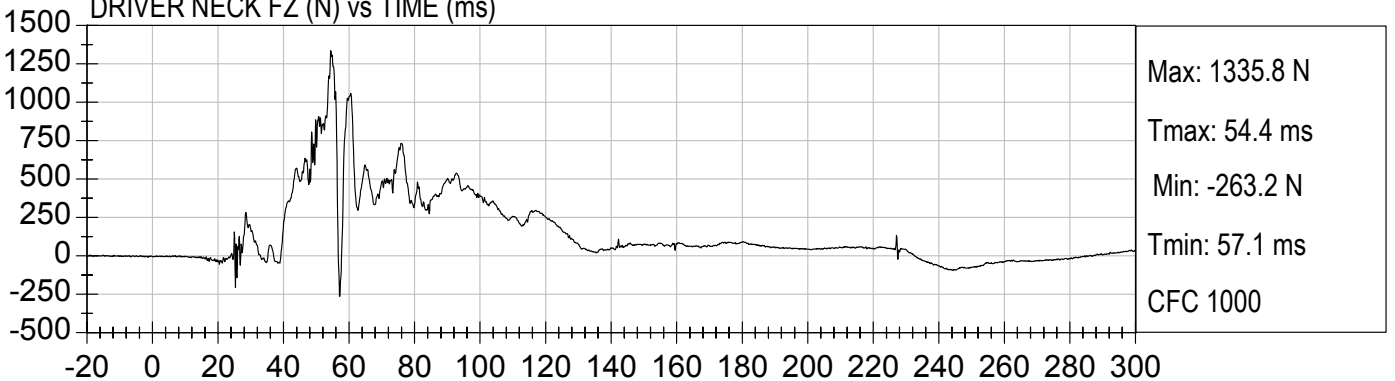





DRIVER NECK FResultant (N) vs TIME (ms)

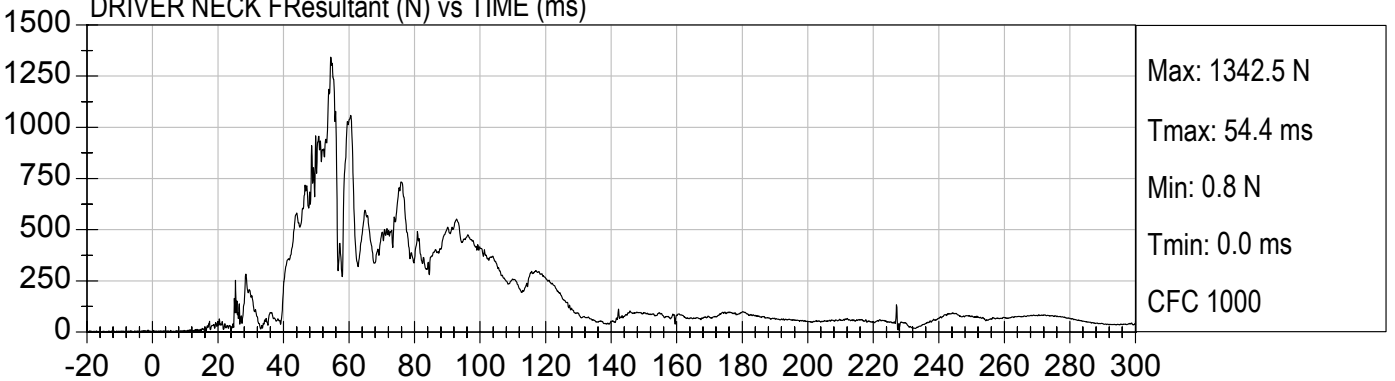



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO





Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

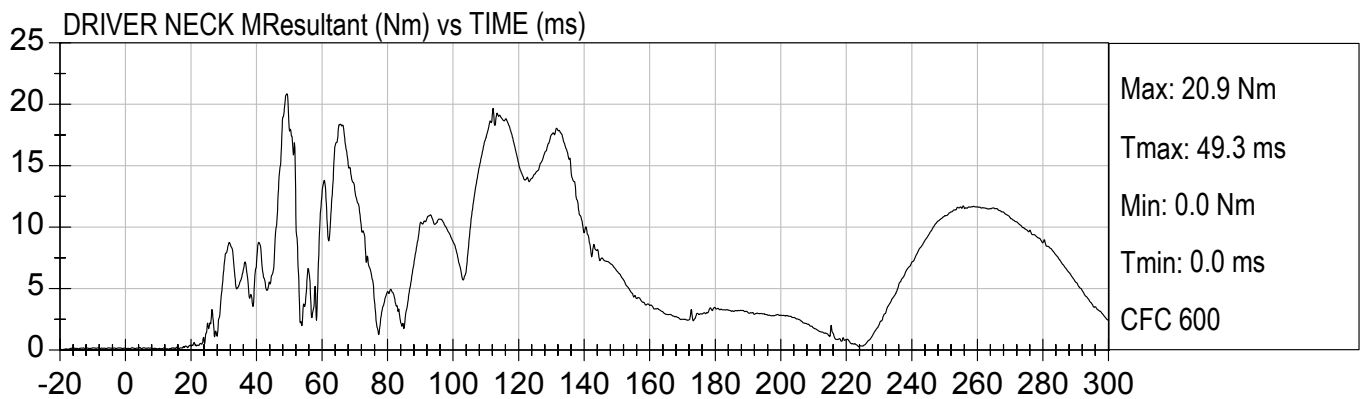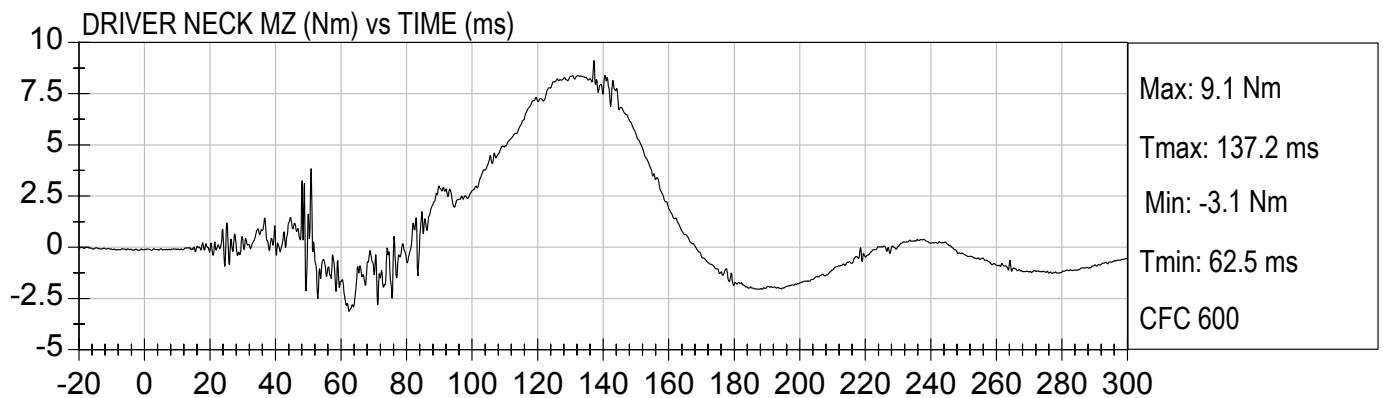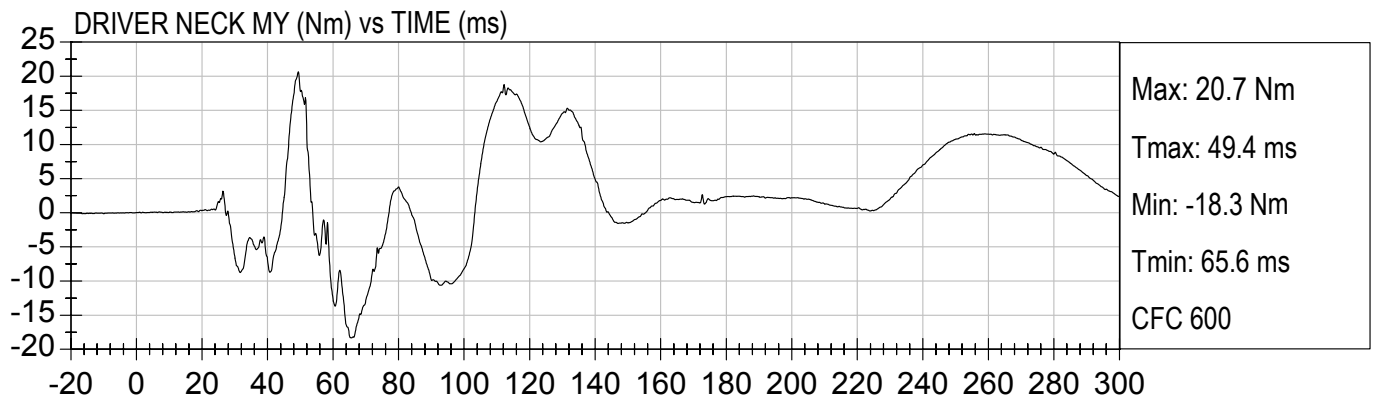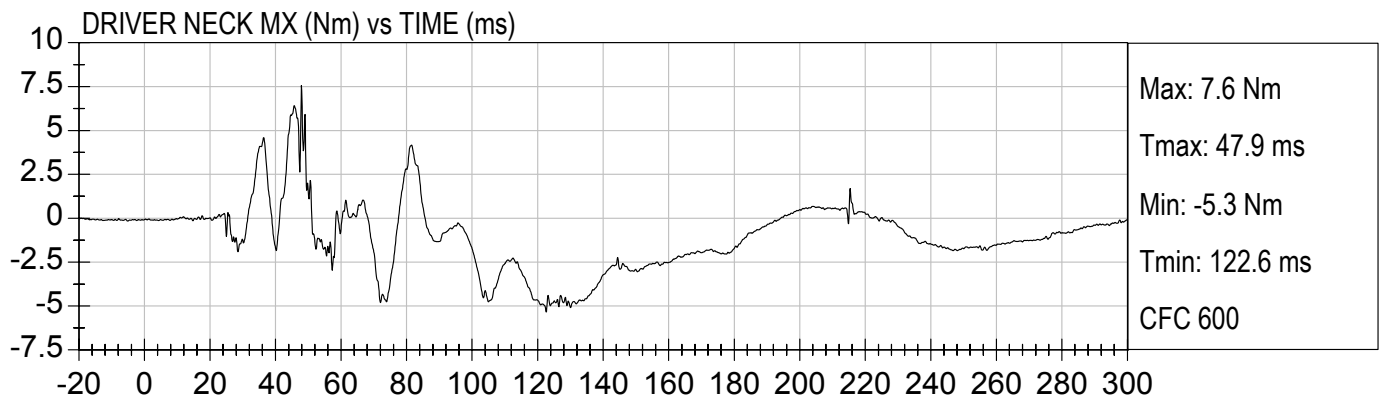



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO





Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

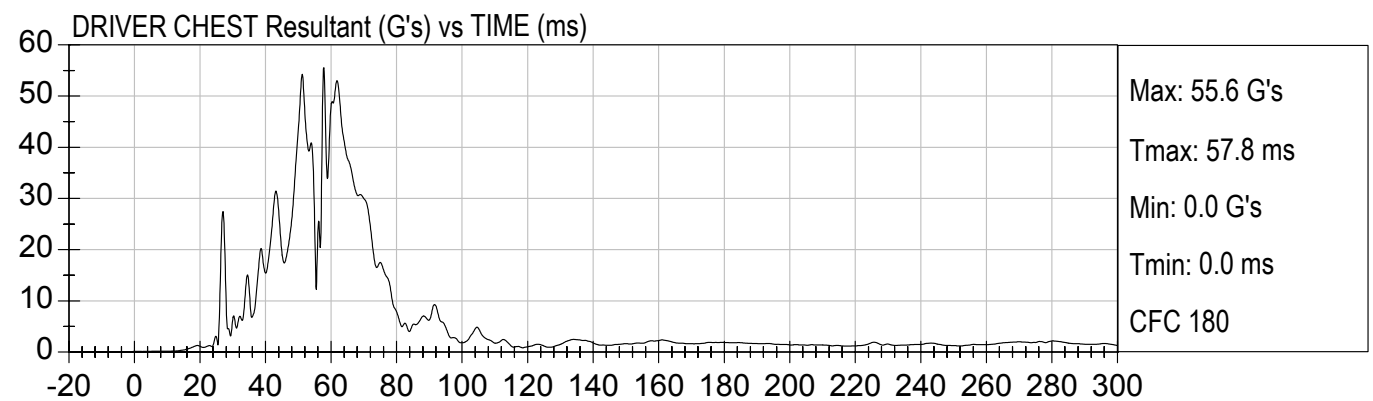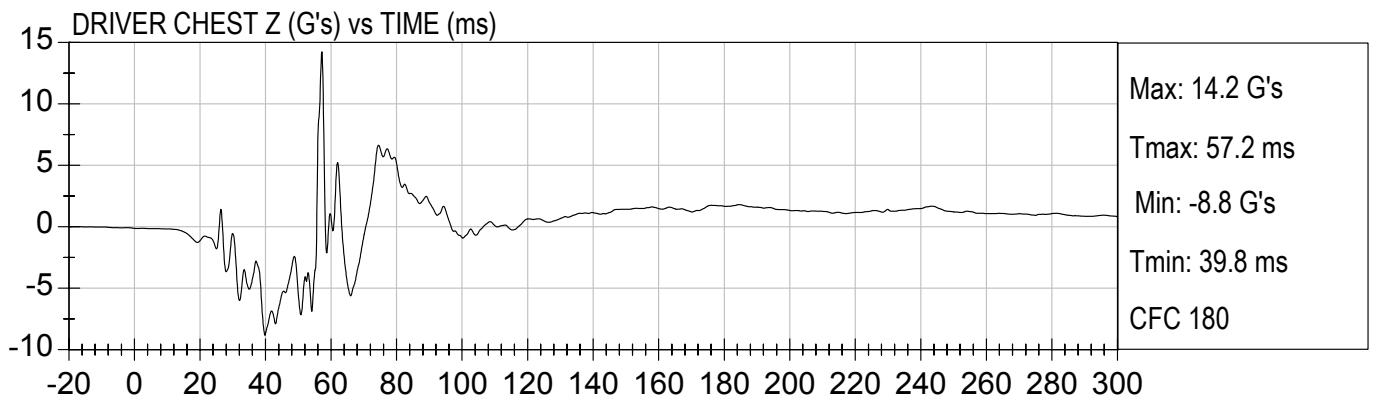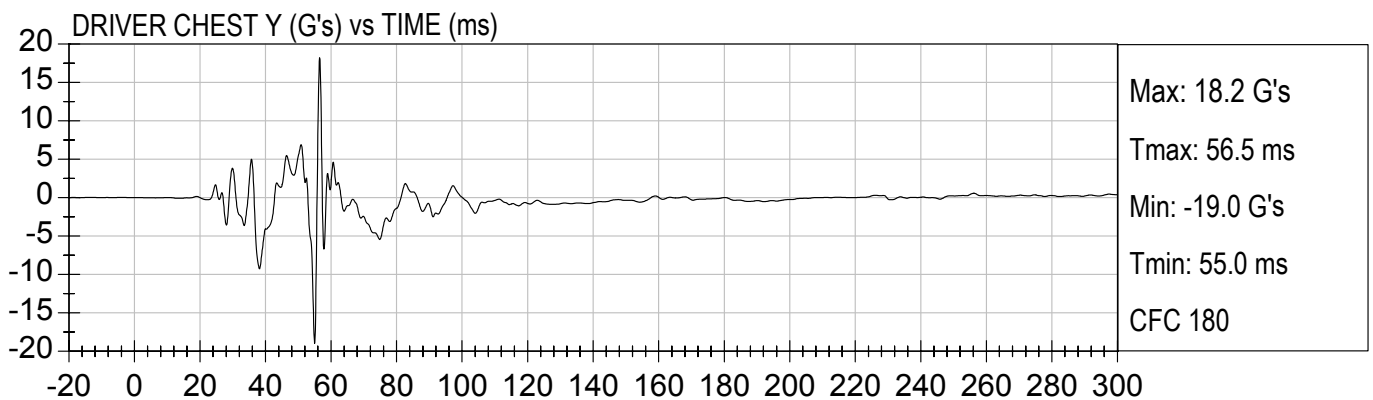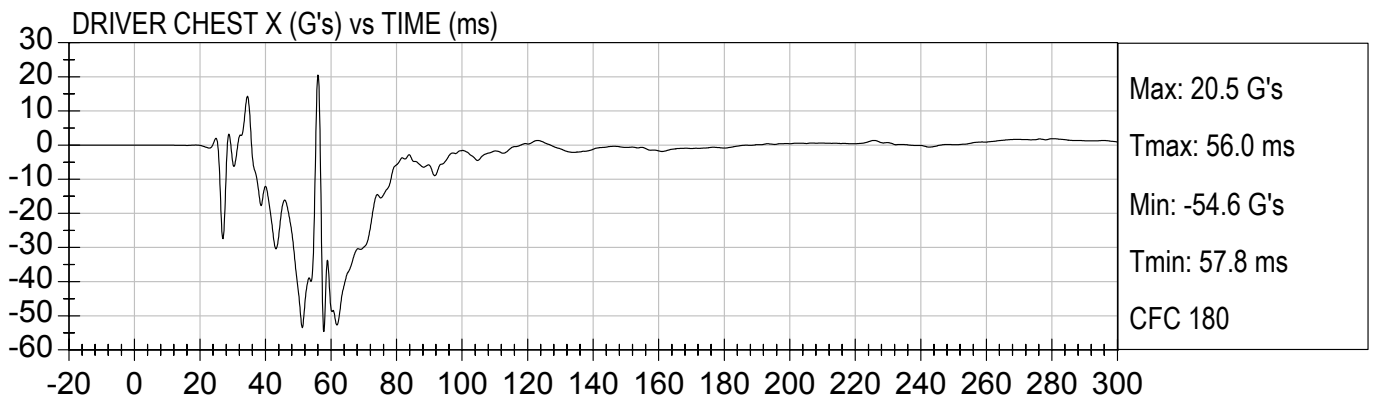



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO



Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

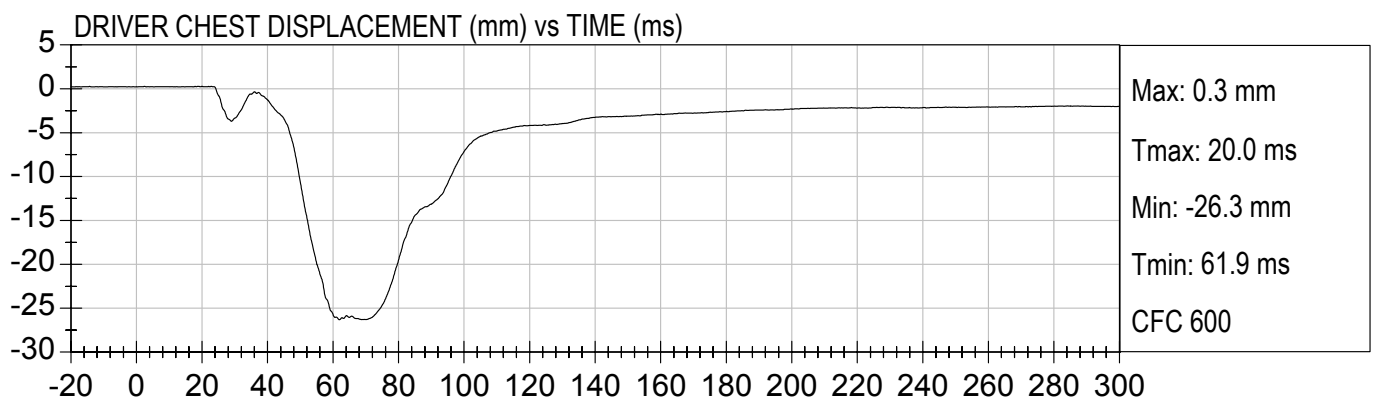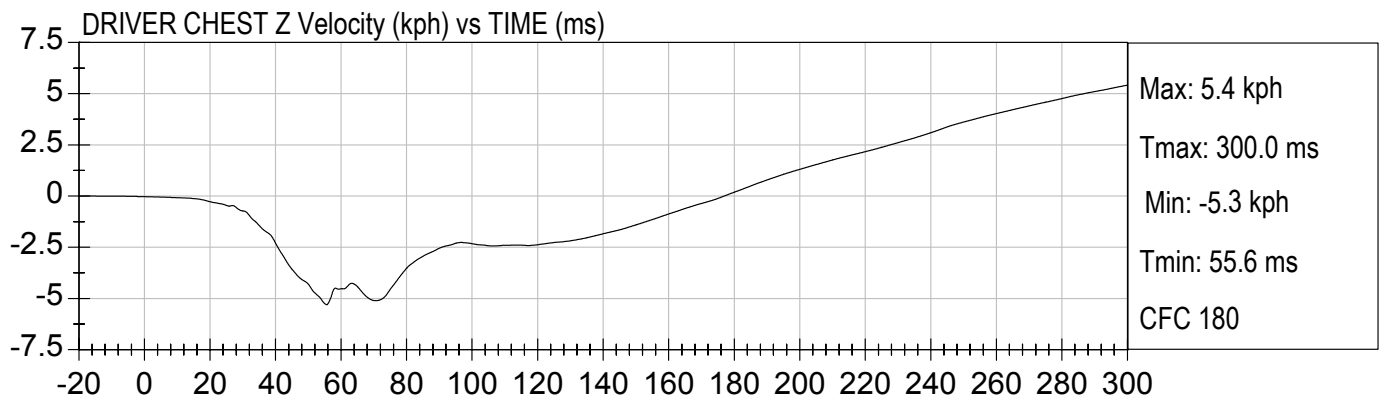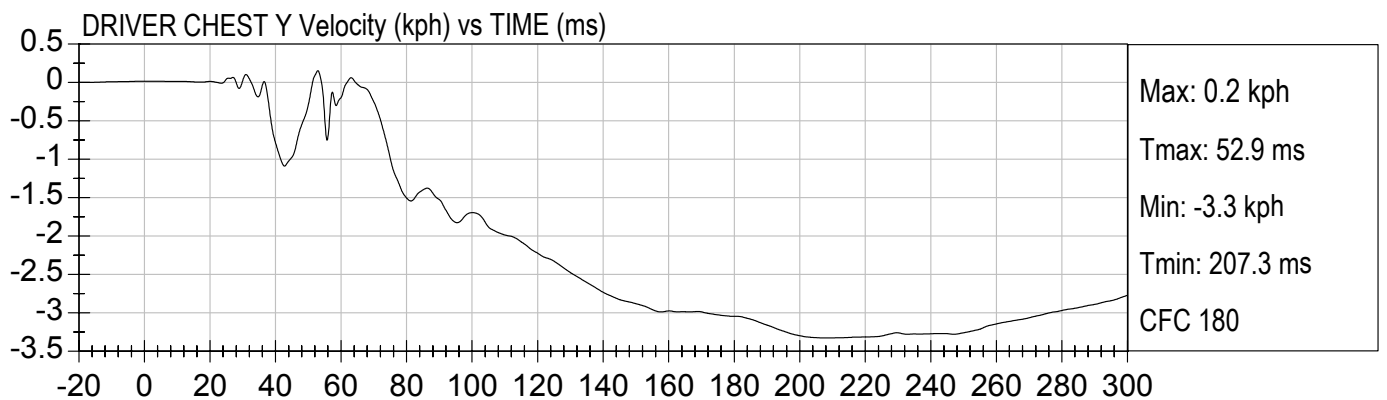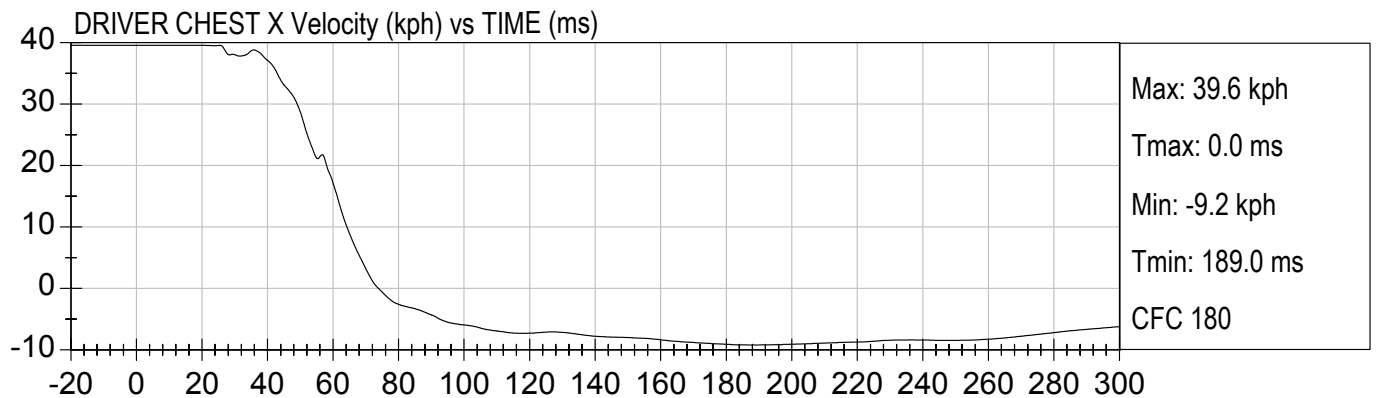



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO





Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

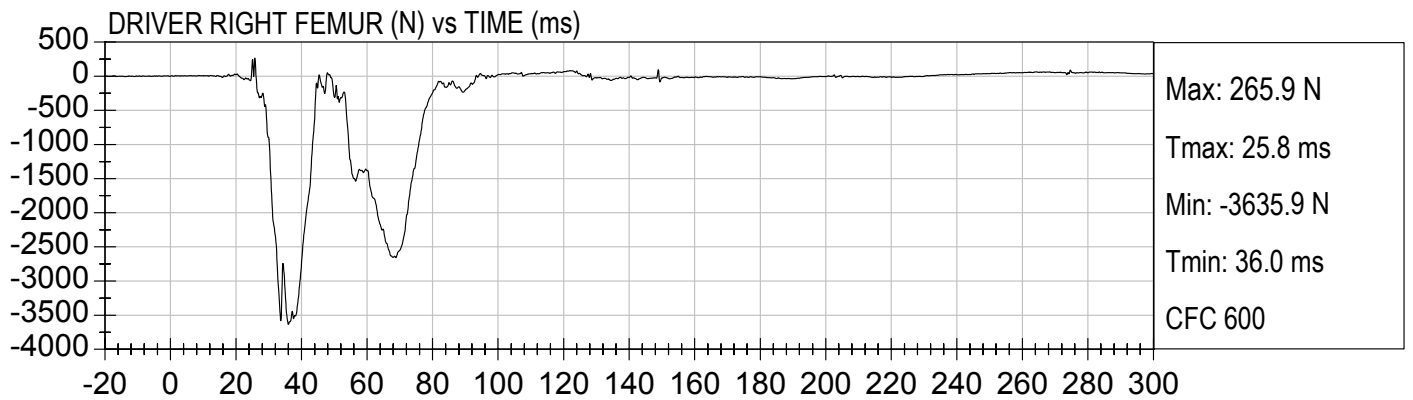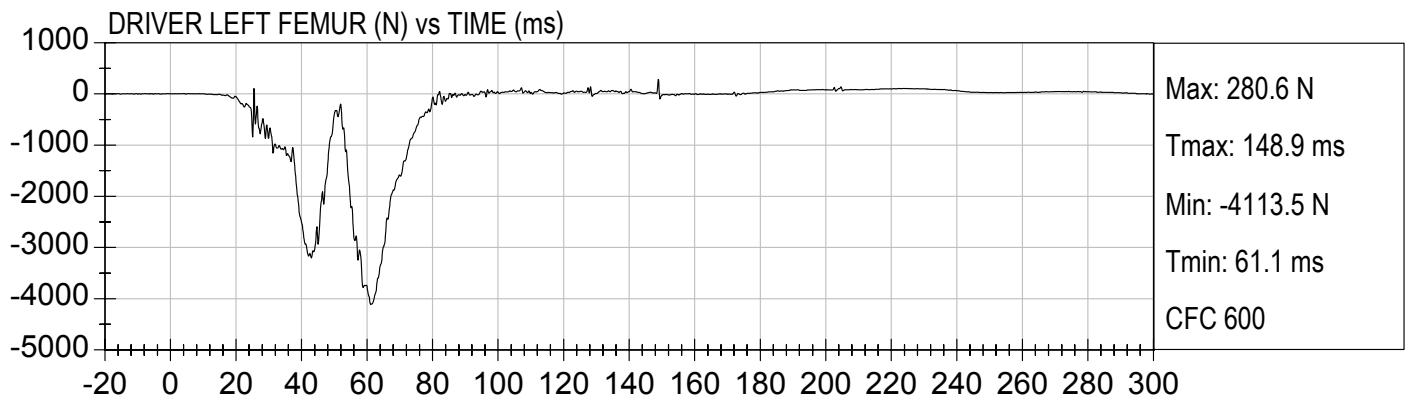



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO



Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

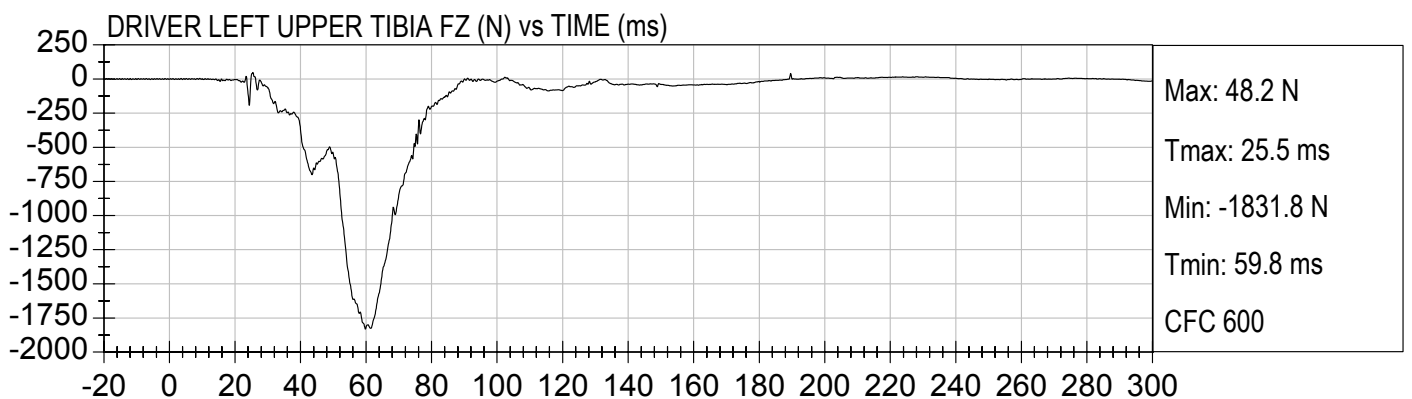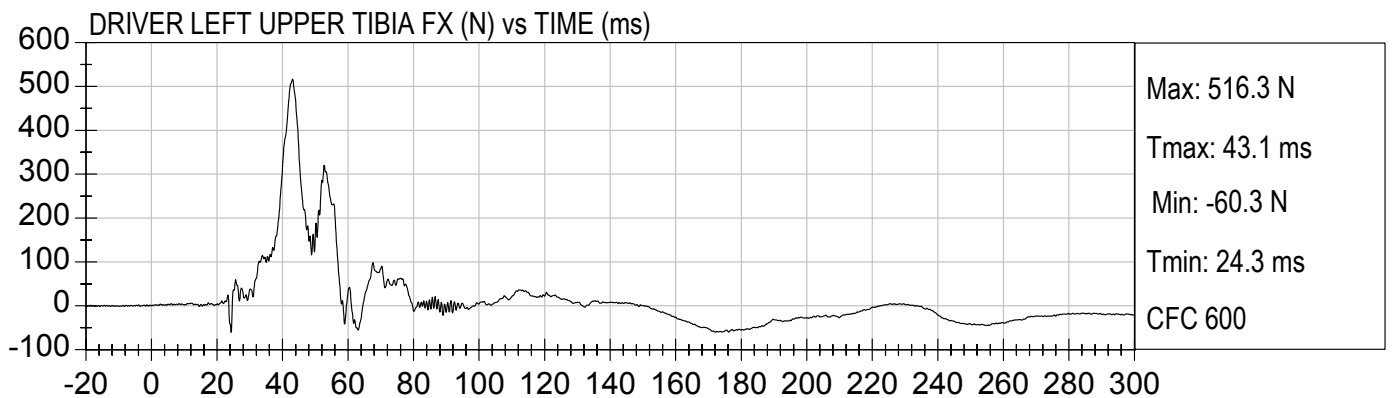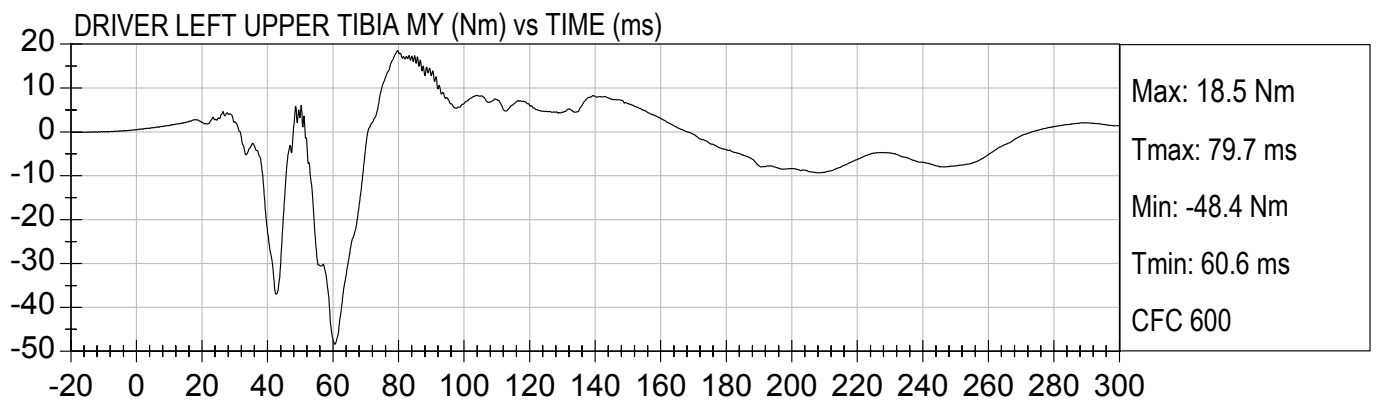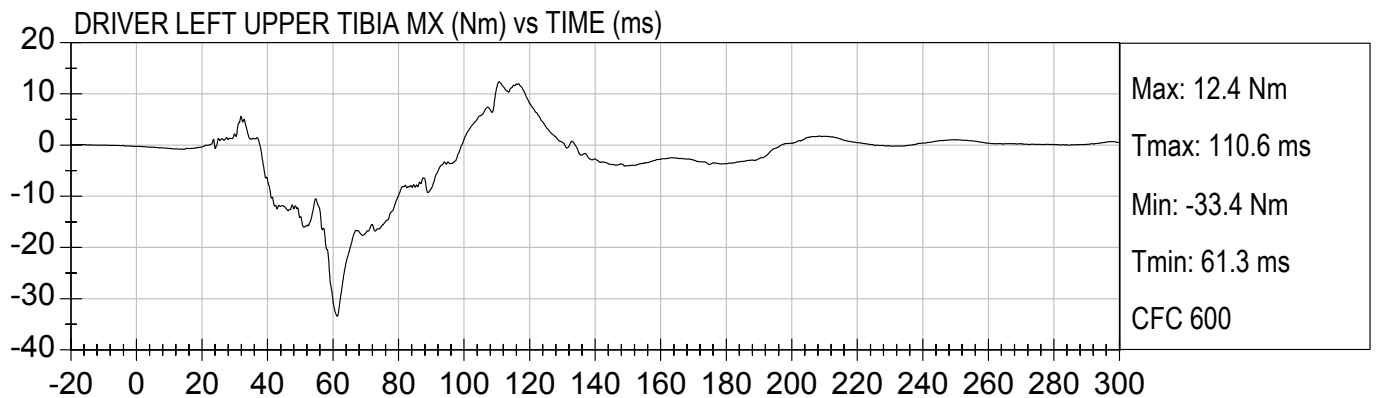



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO

Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

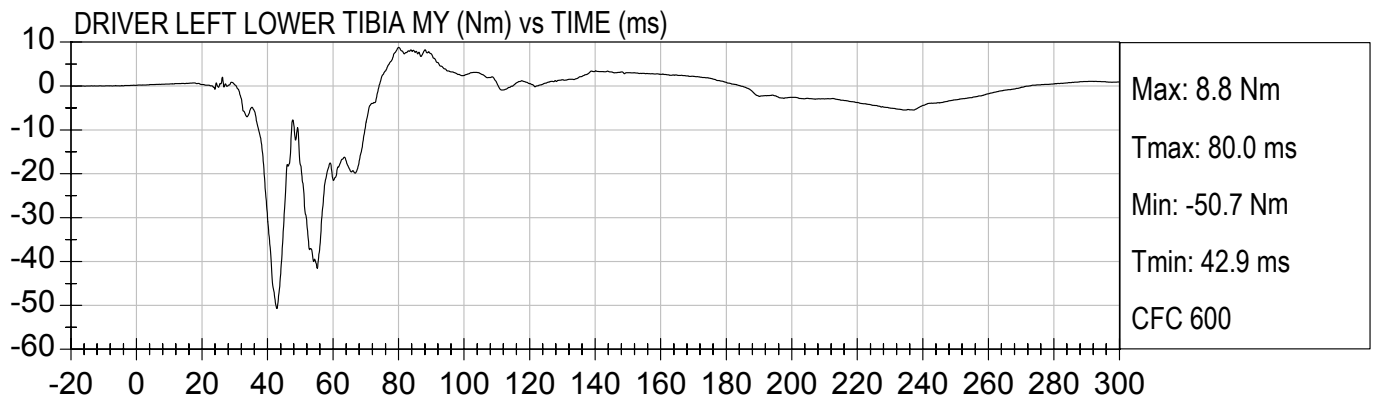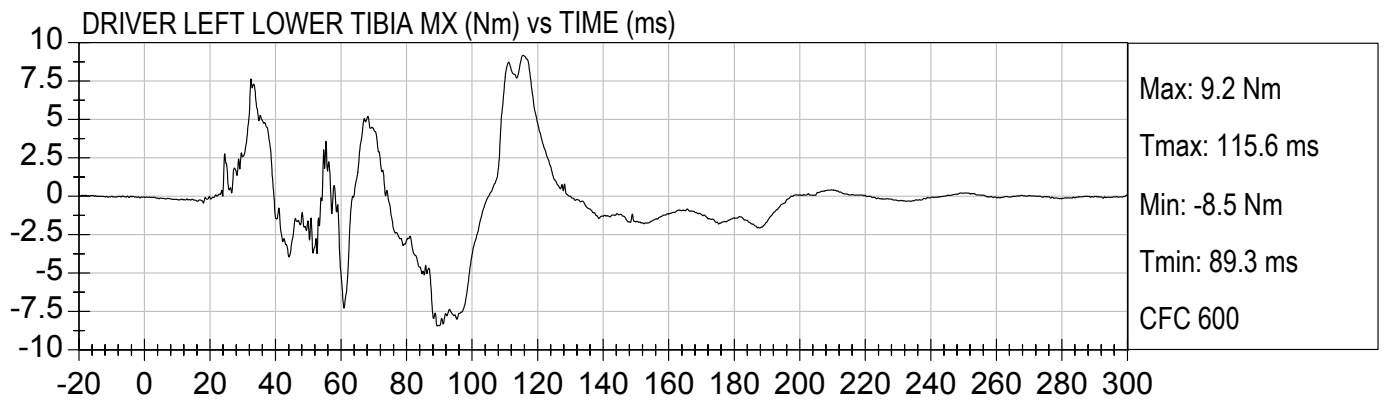





25MPH FRONTAL UNBELTED
2004 DODGE DURANGO

Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)


DRIVER LEFT LOWER TIBIA FX (N) vs TIME (ms)

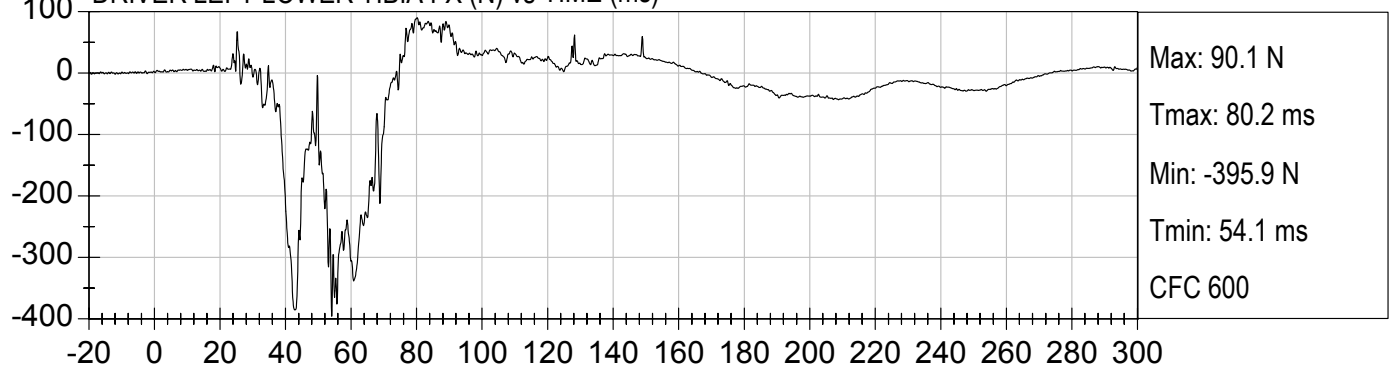

DRIVER LEFT LOWER TIBIA FY (N) vs TIME (ms)

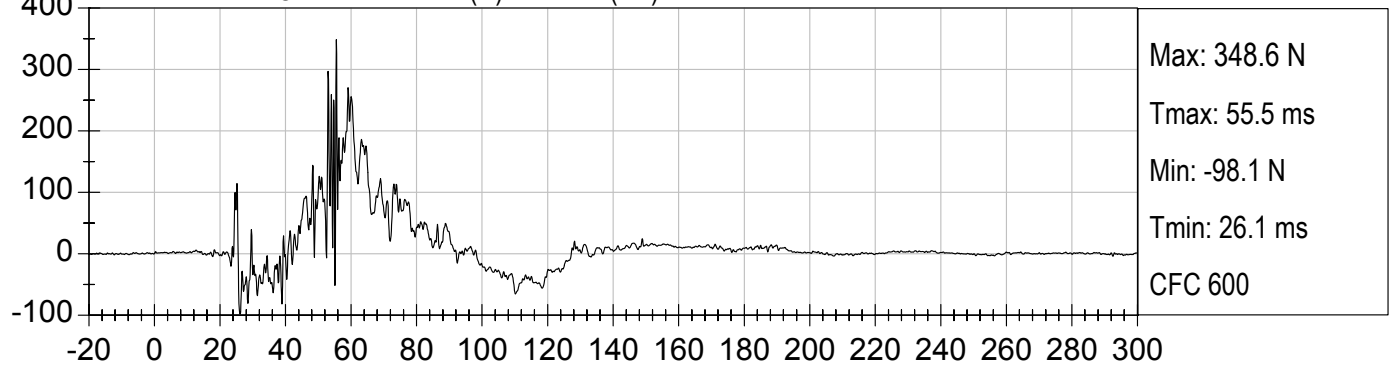

DRIVER LEFT LOWER TIBIA FZ (N) vs TIME (ms)

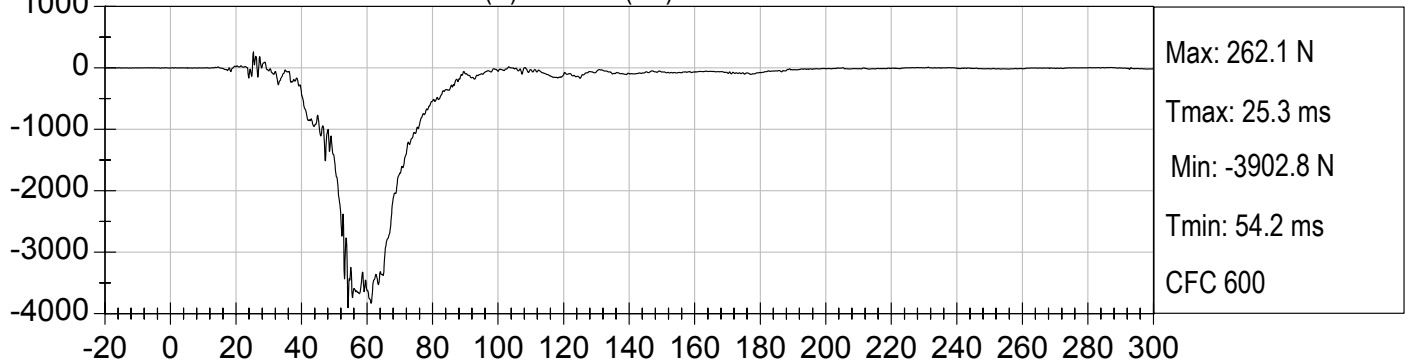





25MPH FRONTAL UNBELTED
2004 DODGE DURANGO

Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)


DRIVER RIGHT UPPER TIBIA MX (Nm) vs TIME (ms)

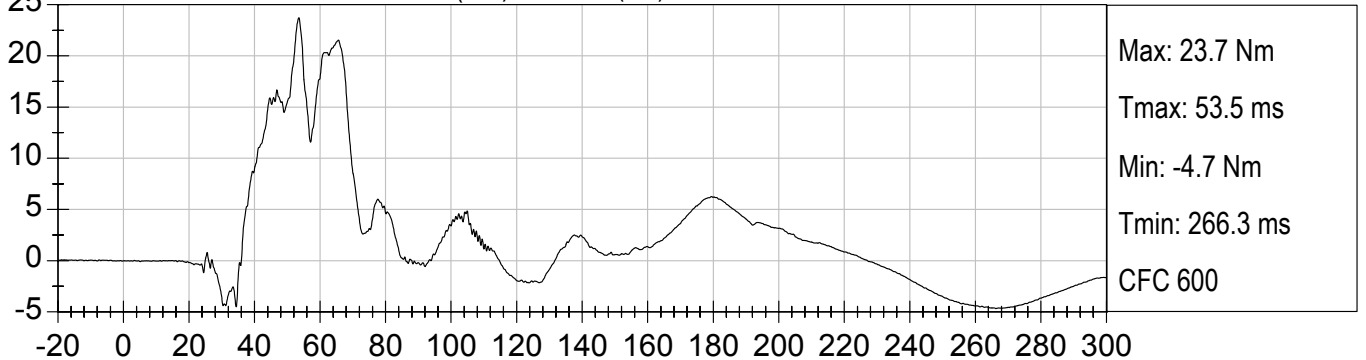


DRIVER RIGHT UPPER TIBIA MY (Nm) vs TIME (ms)

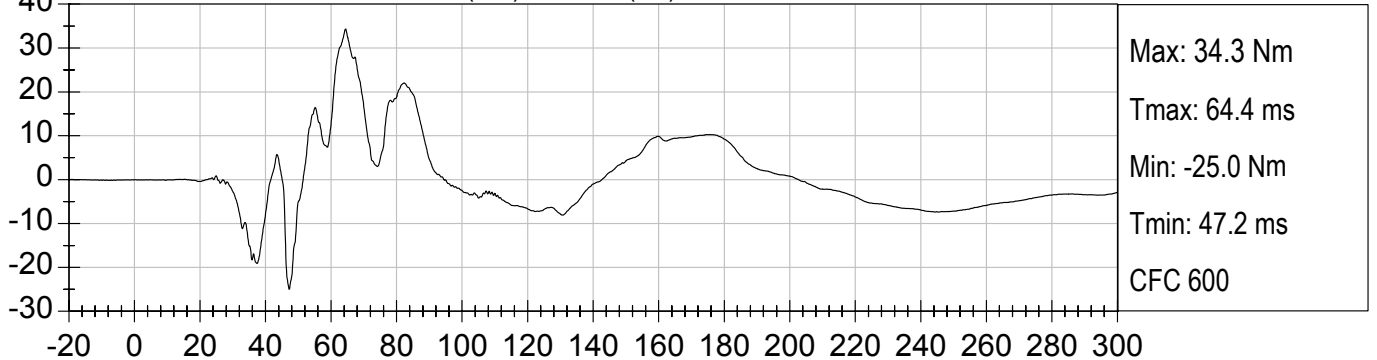

DRIVER RIGHT UPPER TIBIA FX (N) vs TIME (ms)

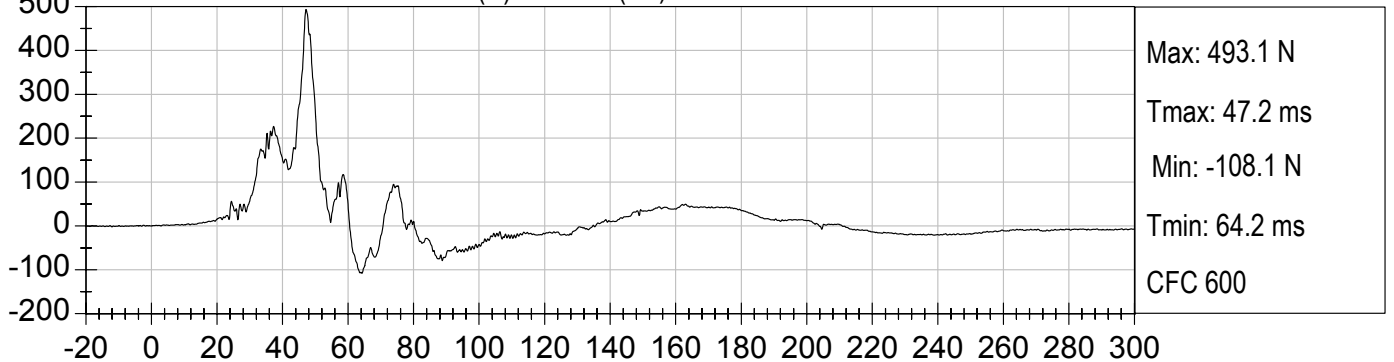



DRIVER RIGHT UPPER TIBIA FZ (N) vs TIME (ms)

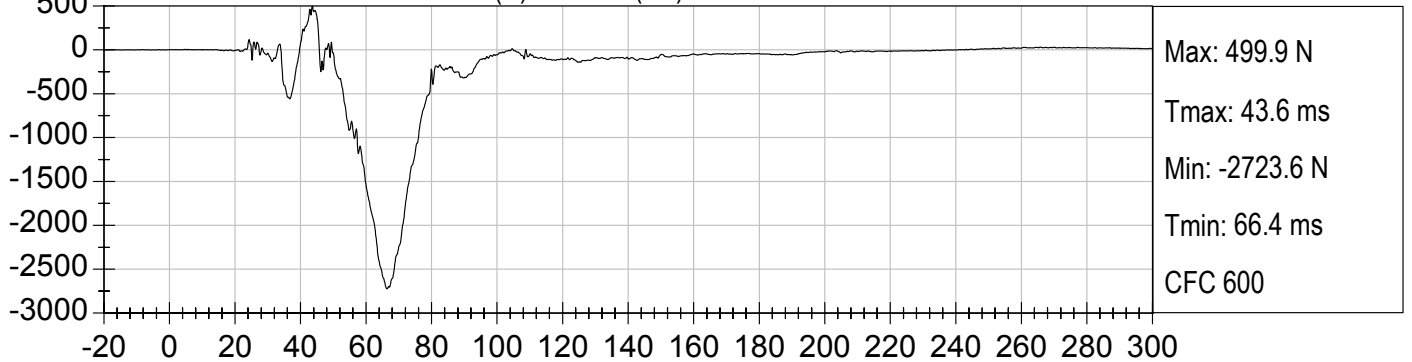



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO




Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)



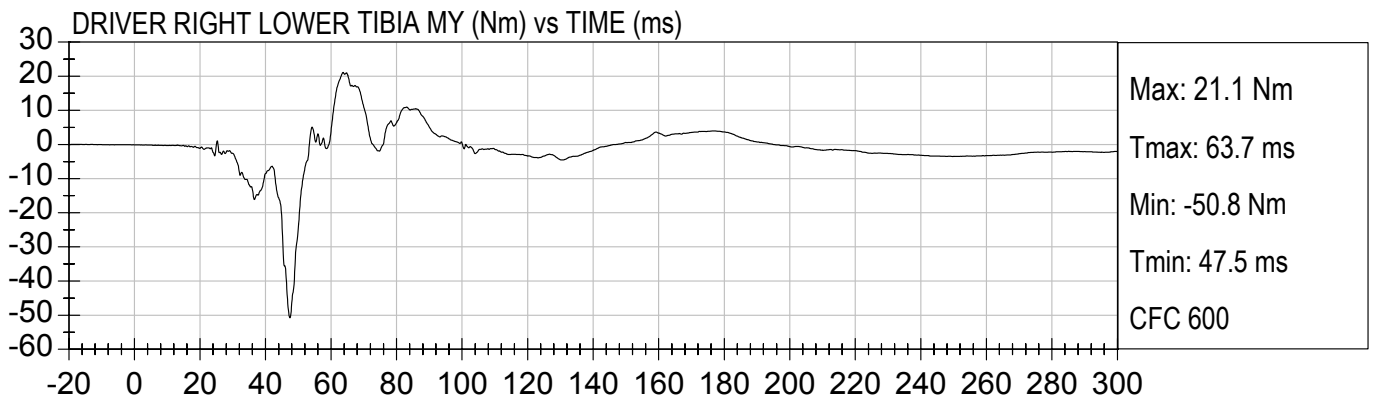
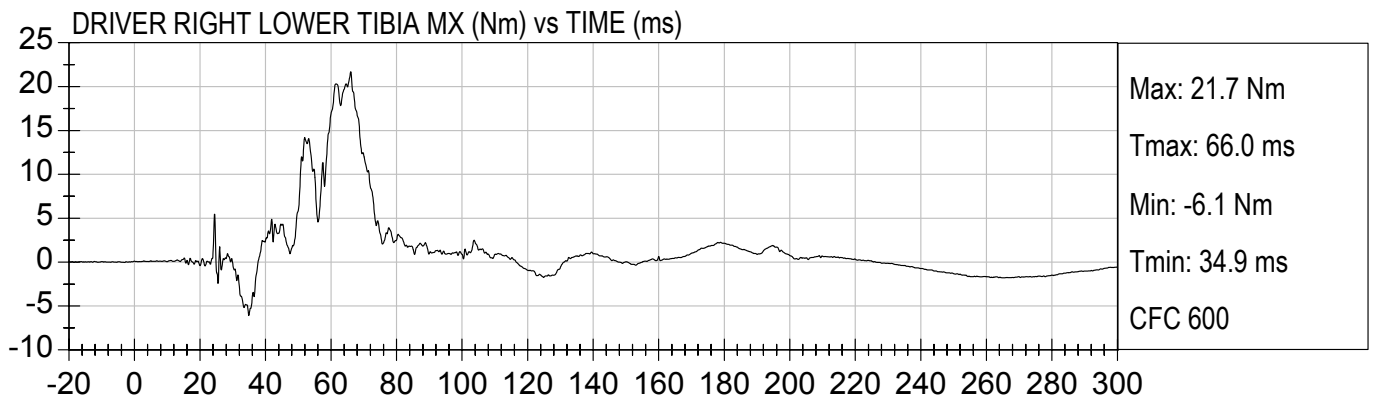




25MPH FRONTAL UNBELTED
2004 DODGE DURANGO

Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)


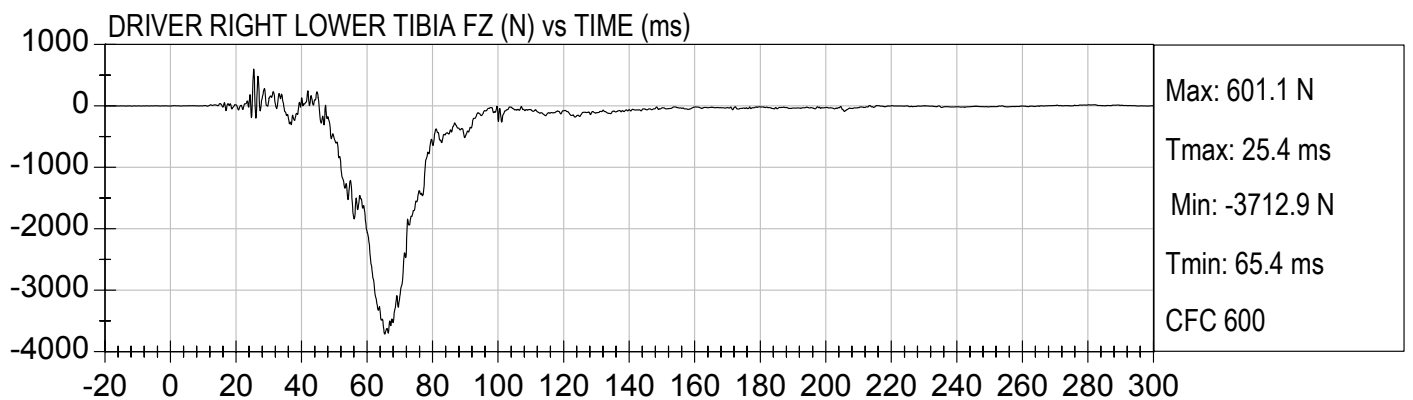
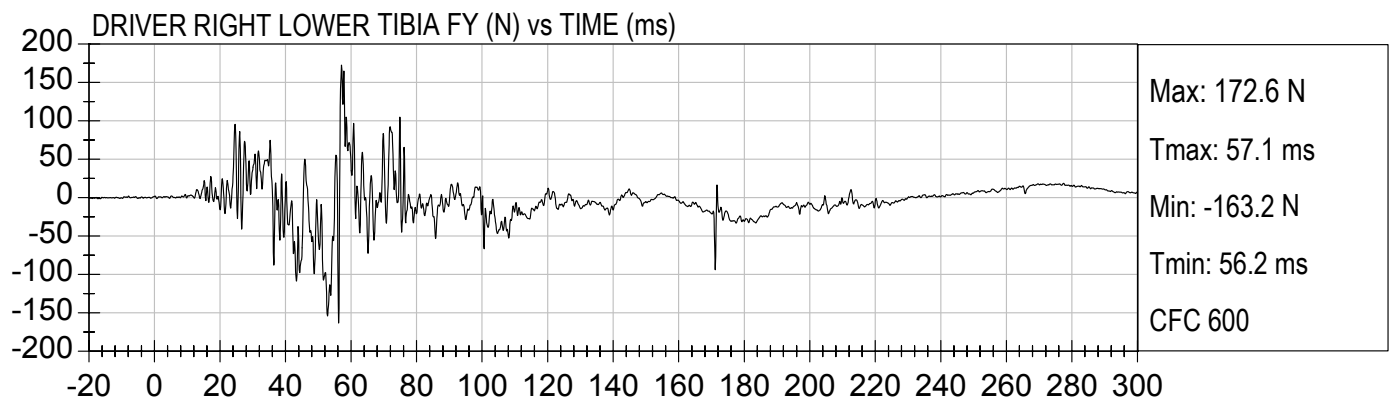
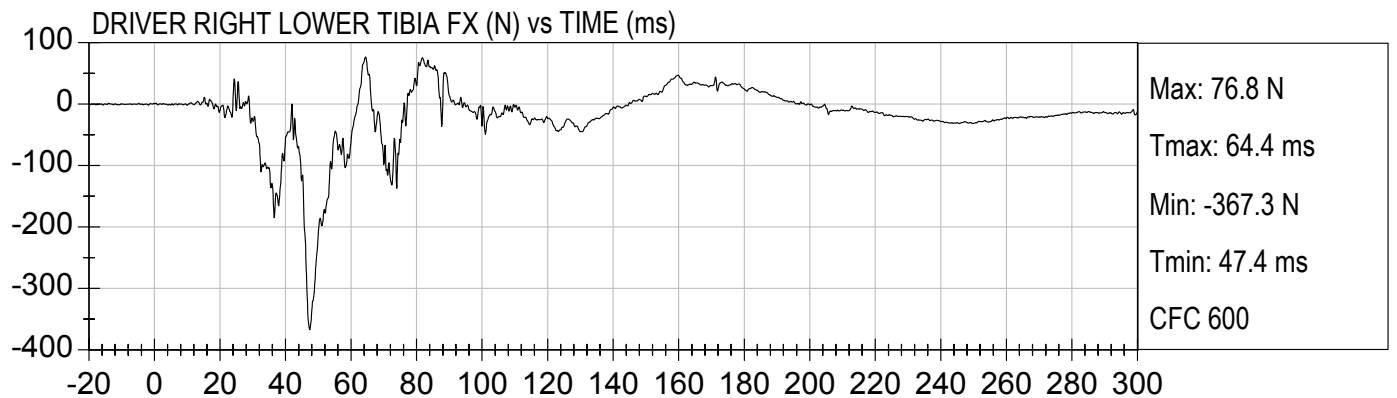


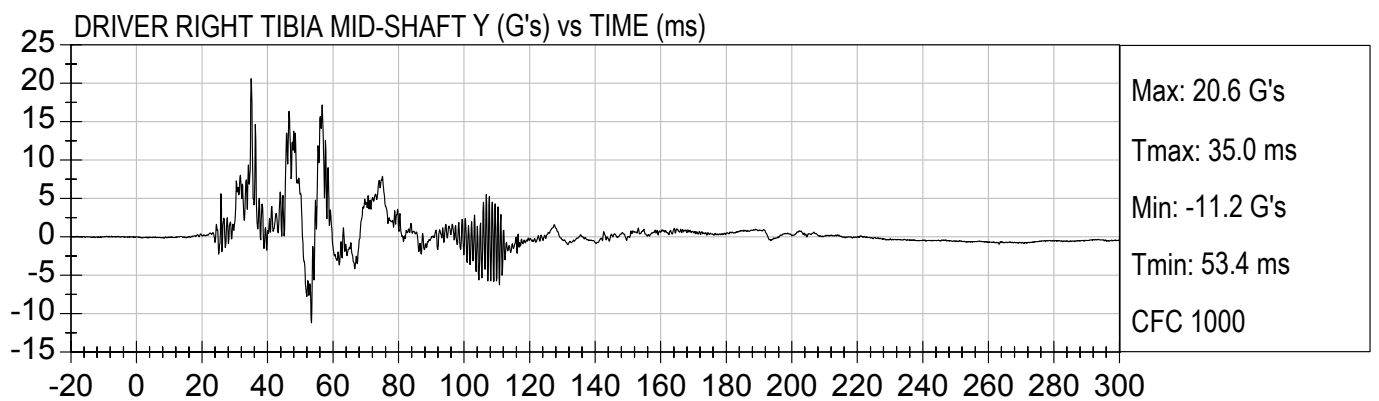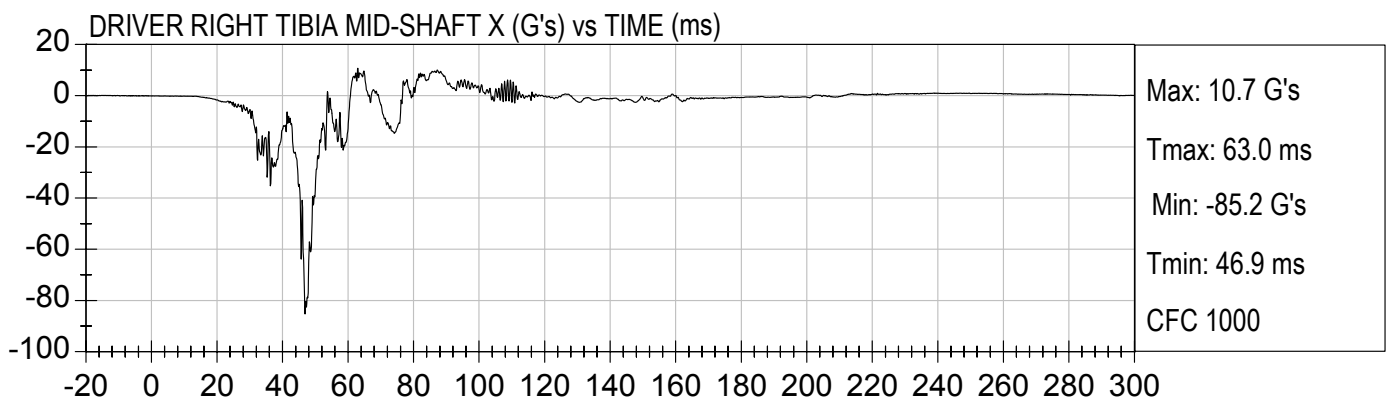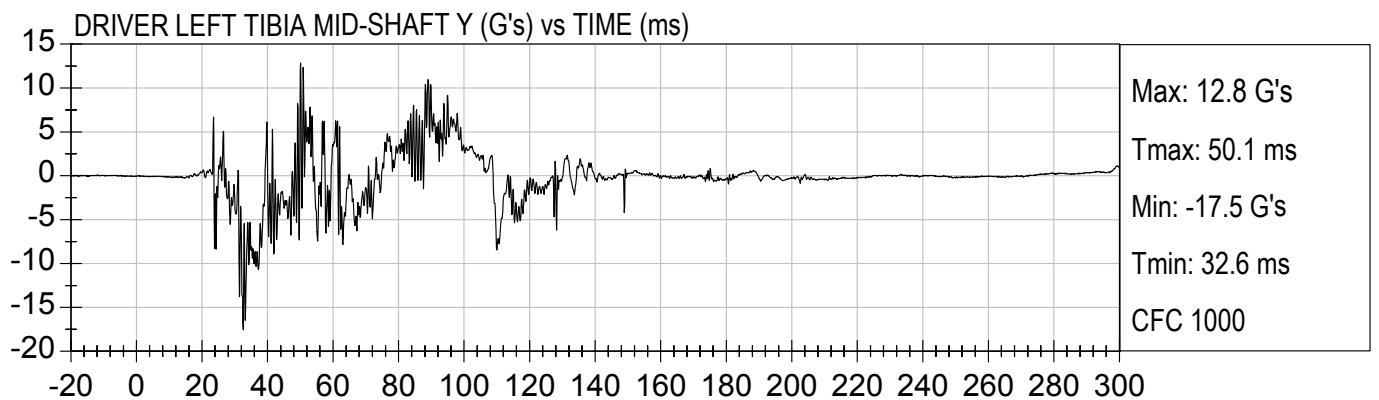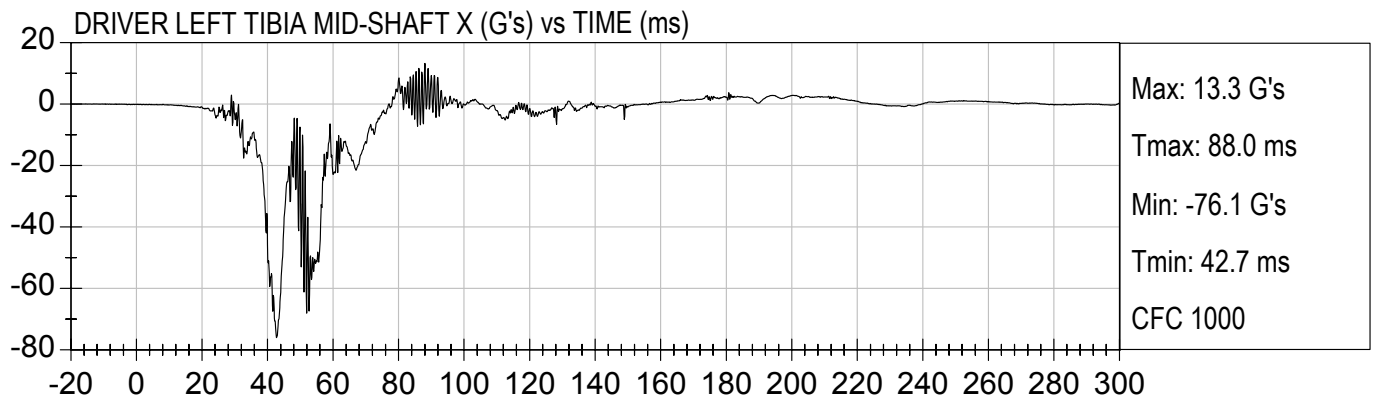



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO





Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

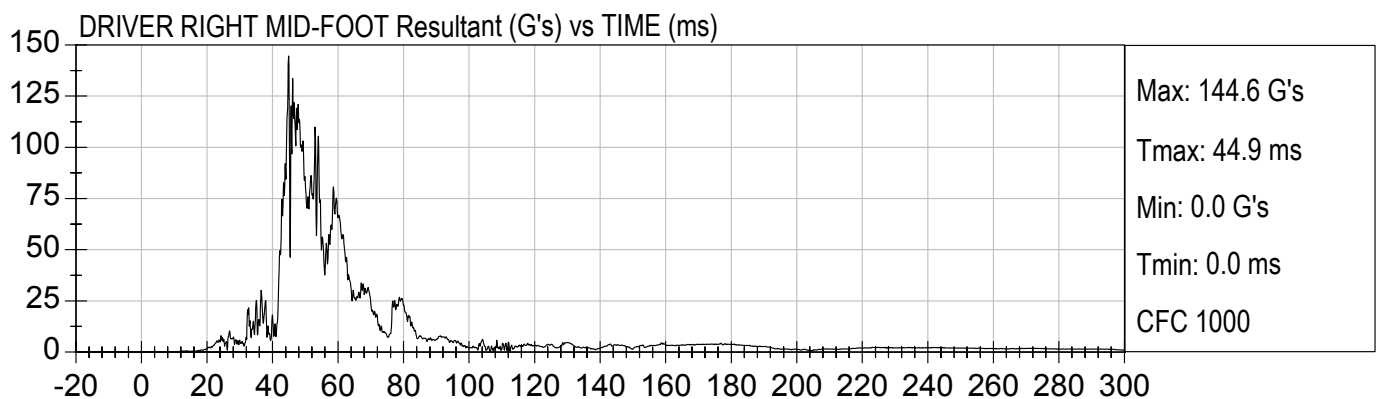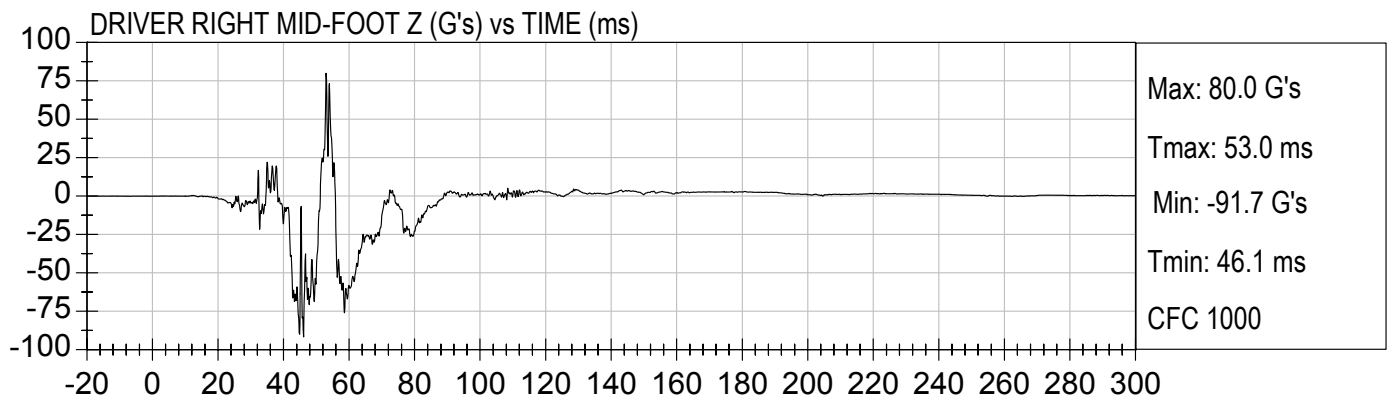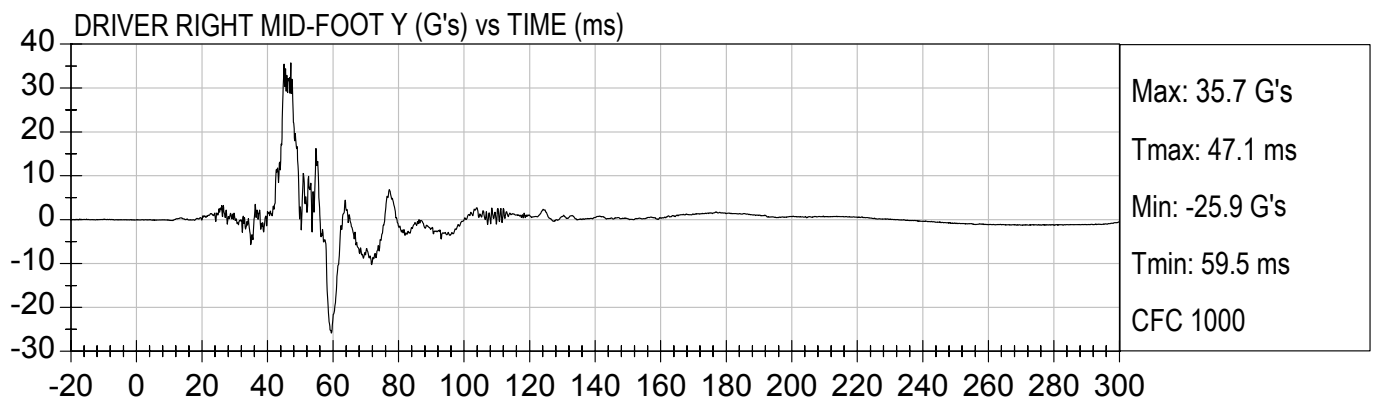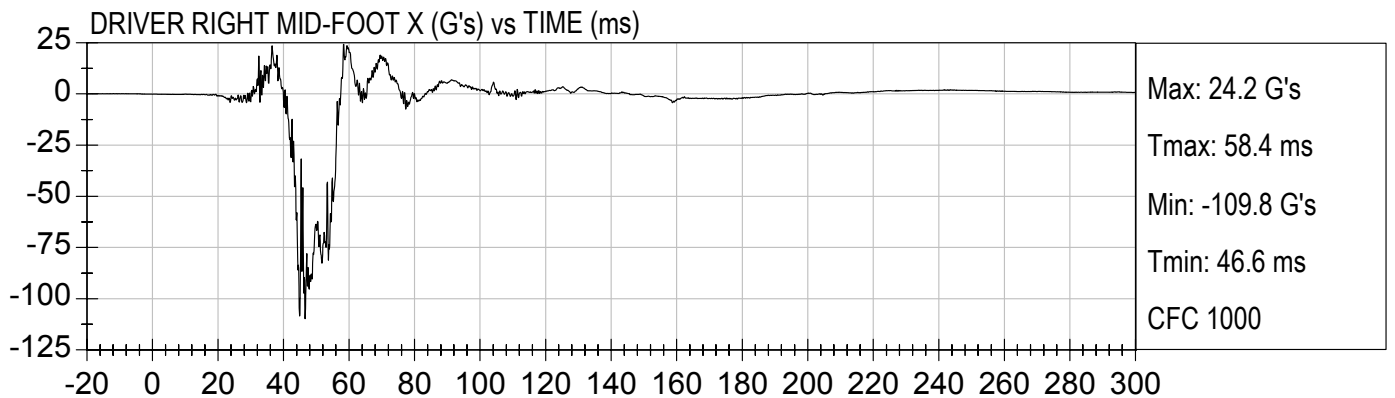



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO




Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

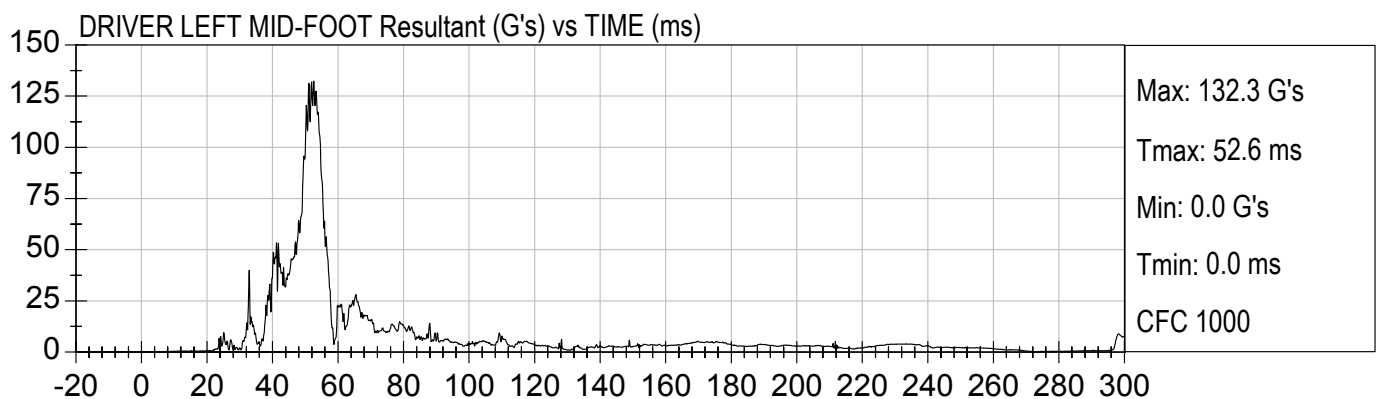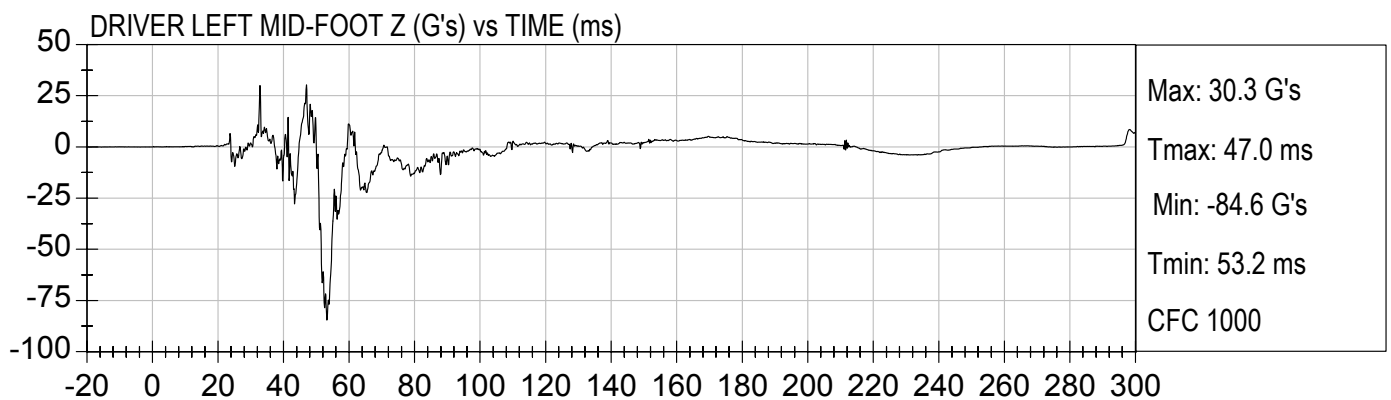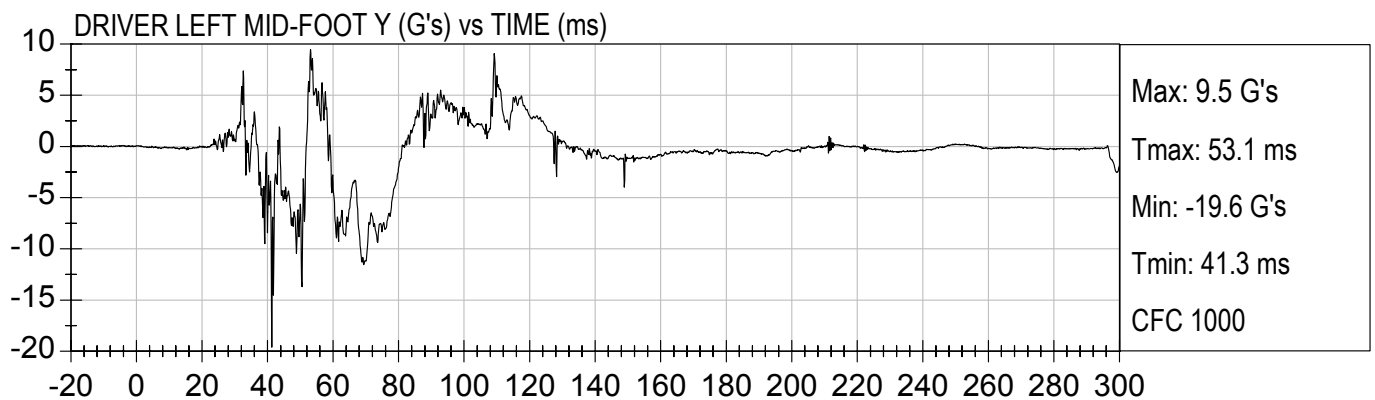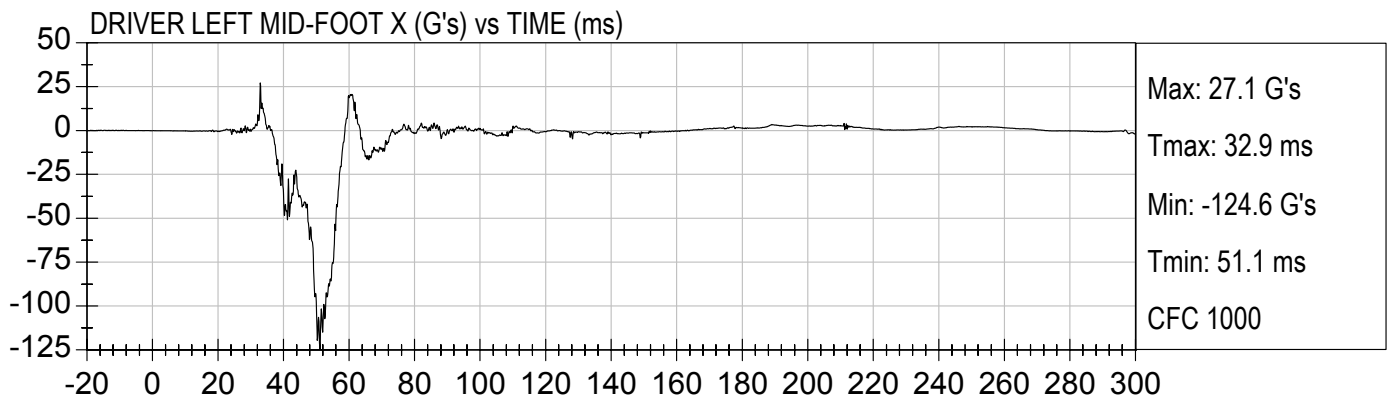



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO

Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

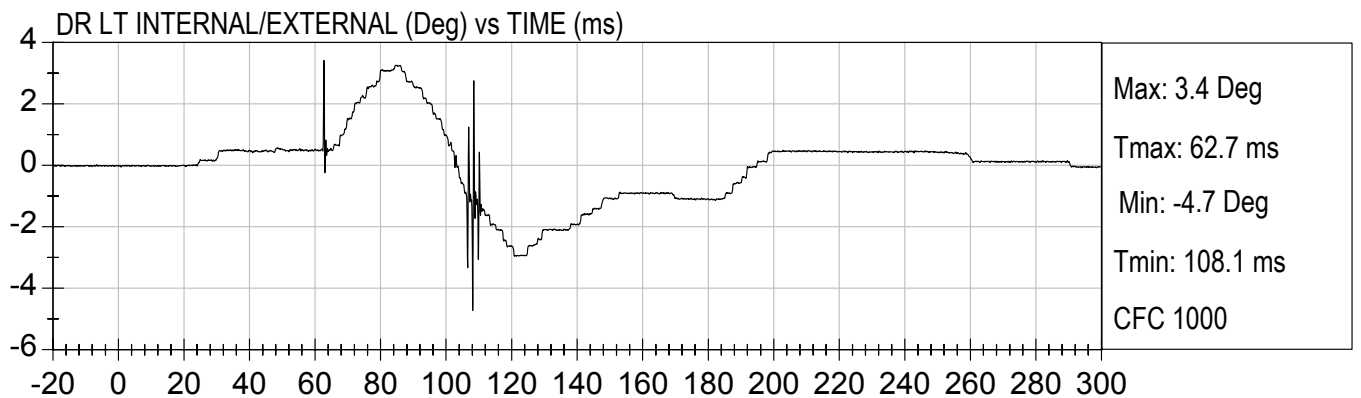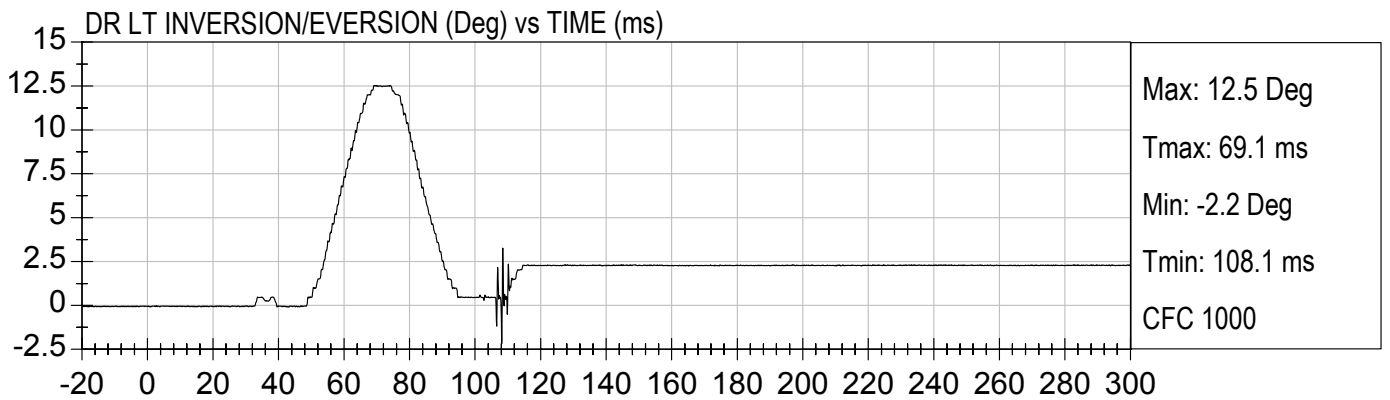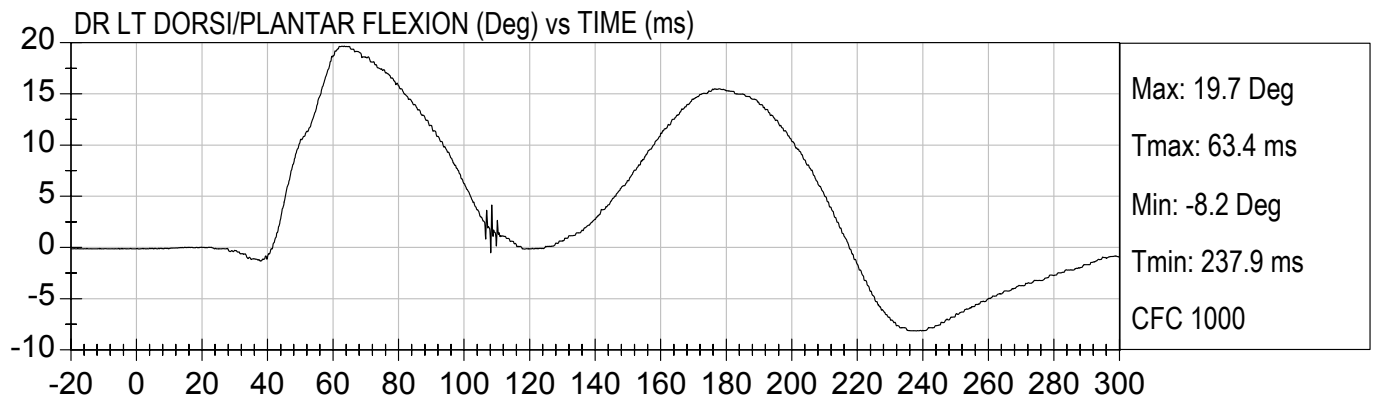





25MPH FRONTAL UNBELTED
2004 DODGE DURANGO

Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)


DR RT DORSI/PLANTAR FLEXION (Deg) vs TIME (ms)

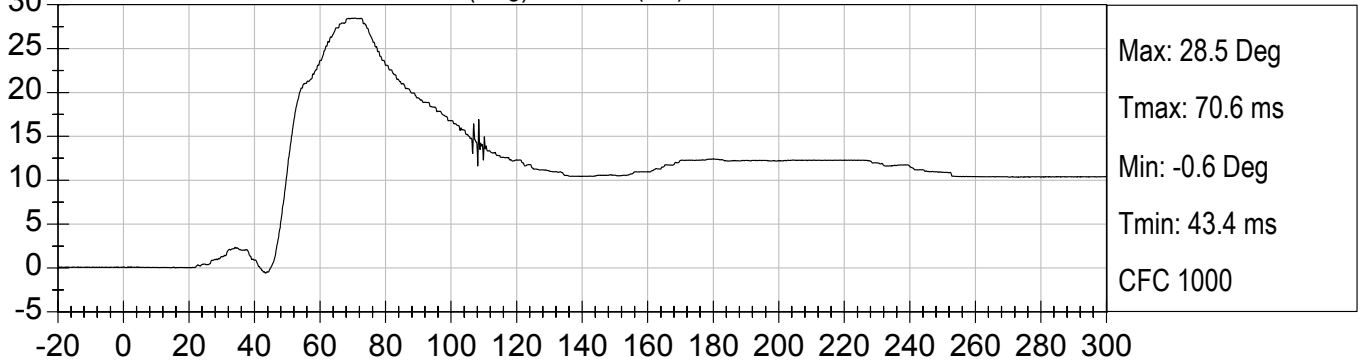

DR RT INVERSION/EVERSION (Deg) vs TIME (ms)

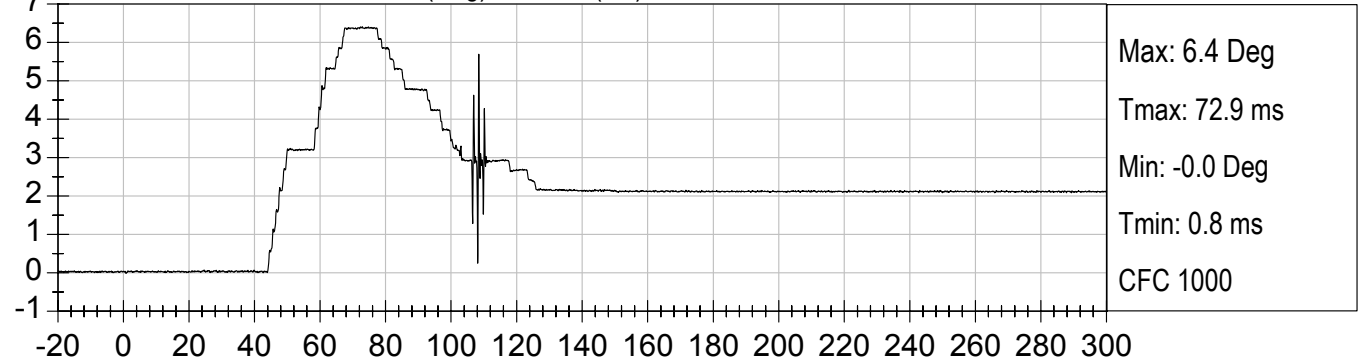





DR RT INTERNAL/EXTERNAL (Deg) vs TIME (ms)

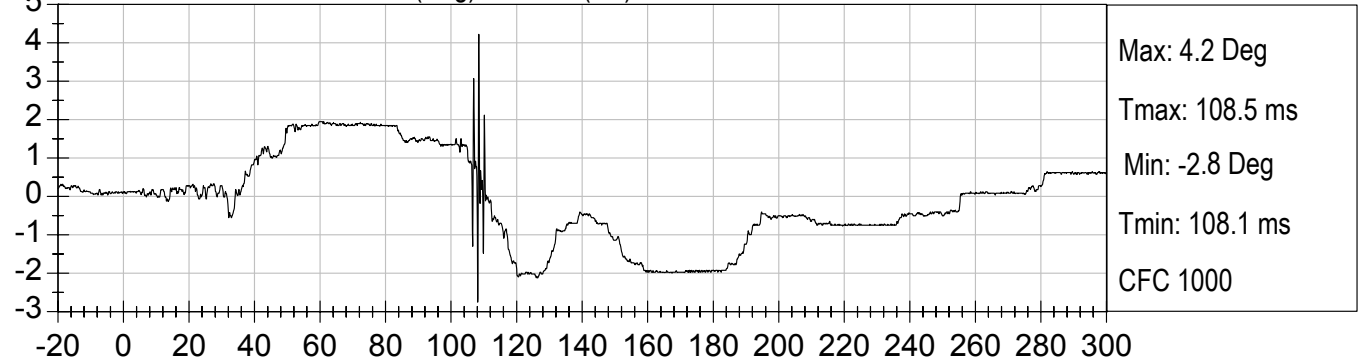



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO

Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

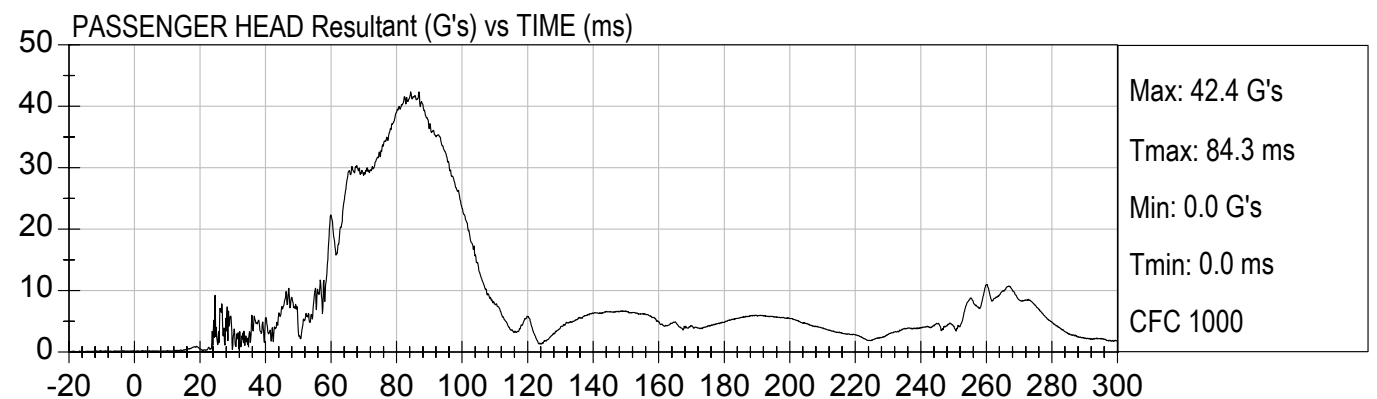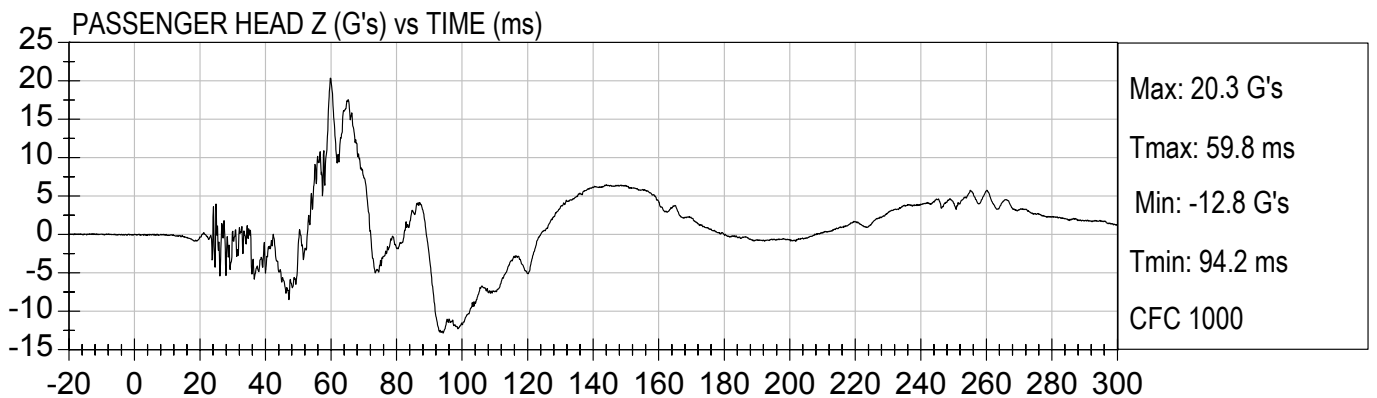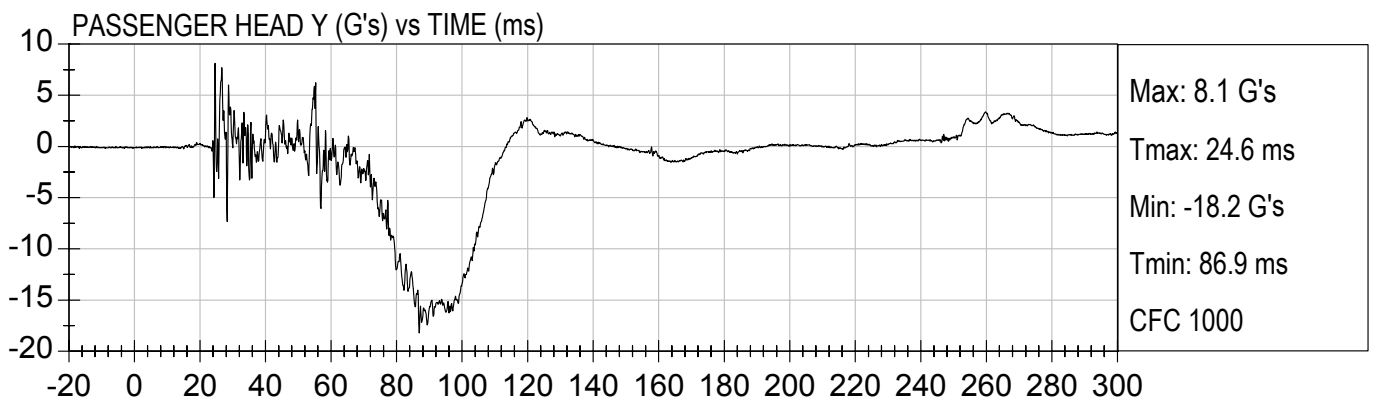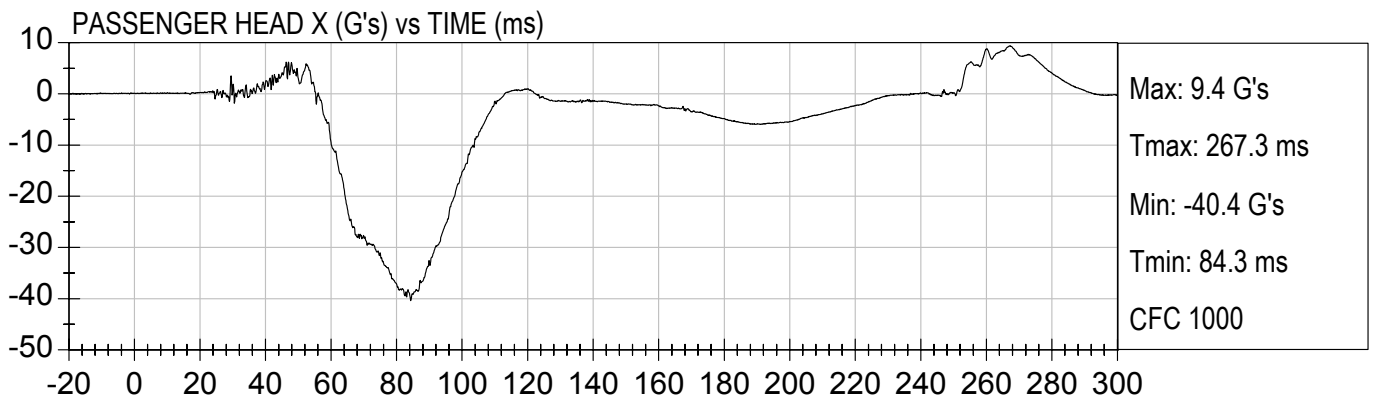





25MPH FRONTAL UNBELTED
2004 DODGE DURANGO

Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)


PASSENGER HEAD X Velocity (kph) vs TIME (ms)

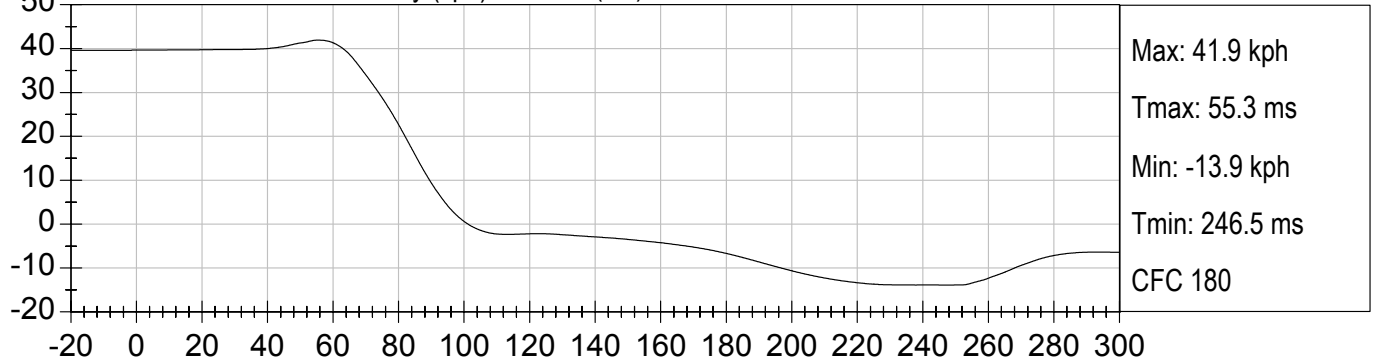

PASSENGER HEAD Y Velocity (kph) vs TIME (ms)

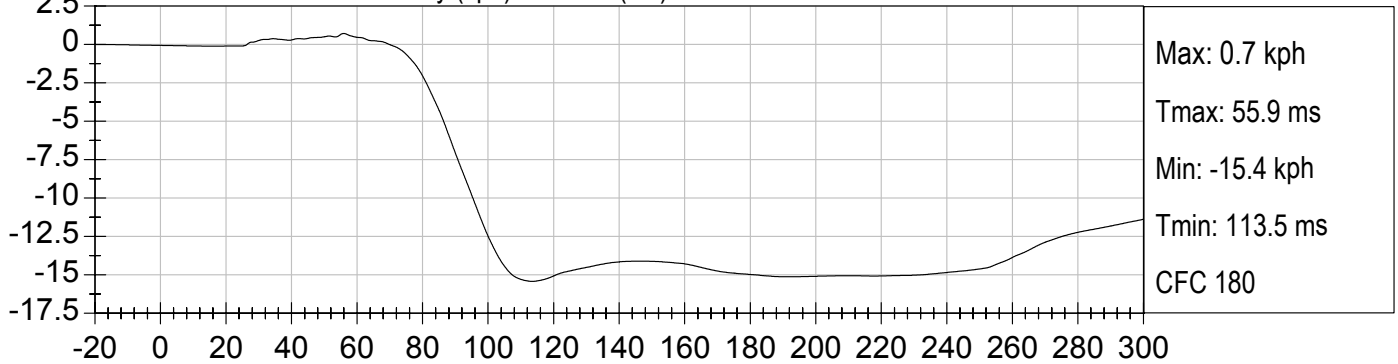

PASSENGER HEAD Z Velocity (kph) vs TIME (ms)

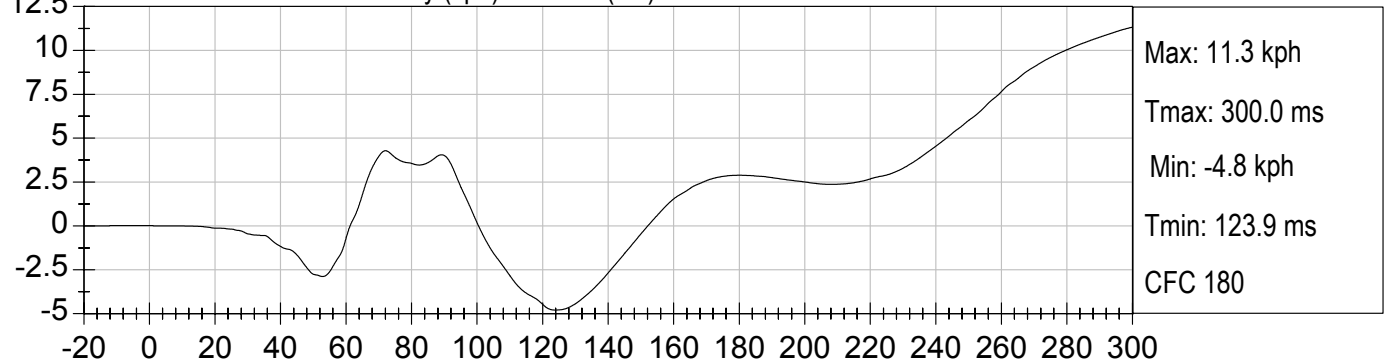





25MPH FRONTAL UNBELTED
2004 DODGE DURANGO

Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)


PASSENGER NECK FX (N) vs TIME (ms)

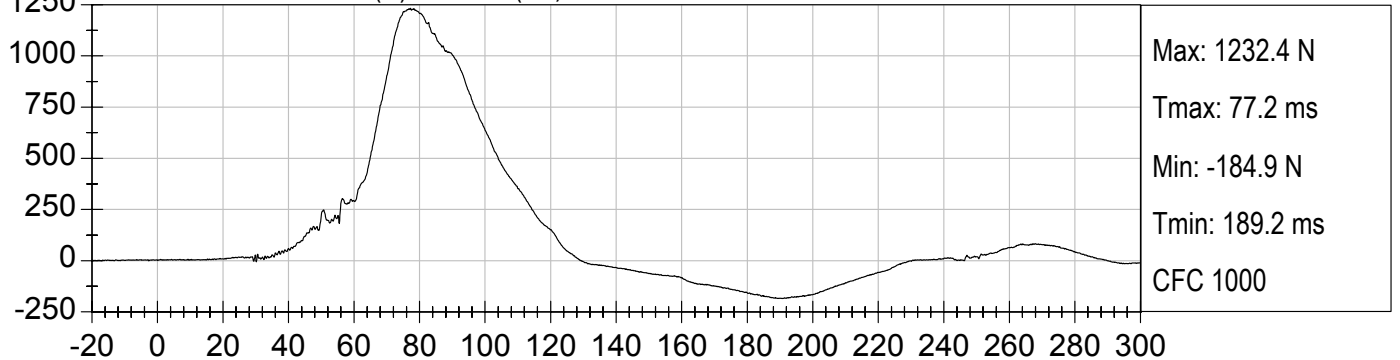


PASSENGER NECK FY (N) vs TIME (ms)

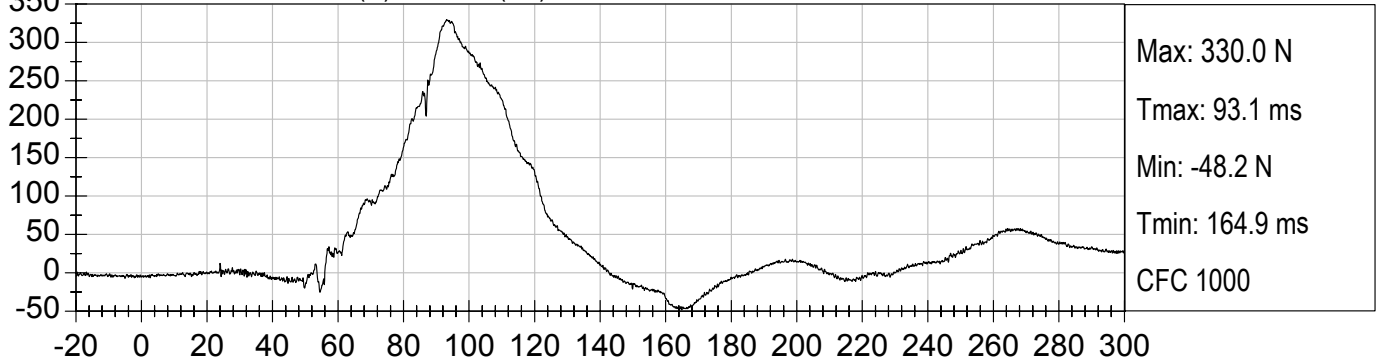

PASSENGER NECK FZ (N) vs TIME (ms)

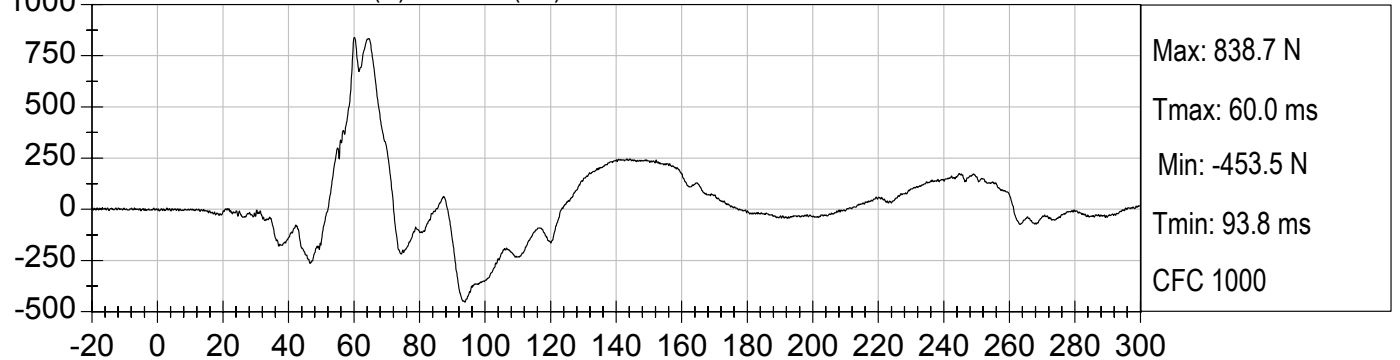





PASSENGER NECK FResultant (N) vs TIME (ms)

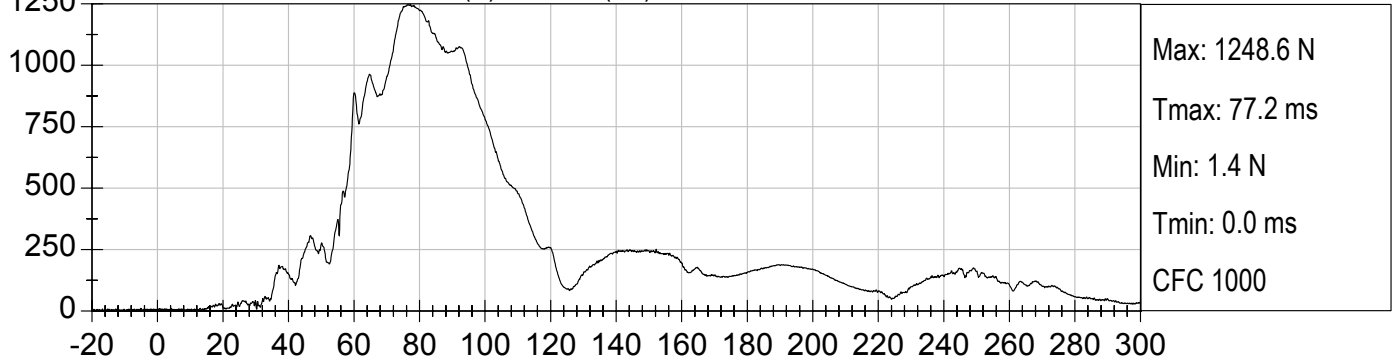



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO





Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

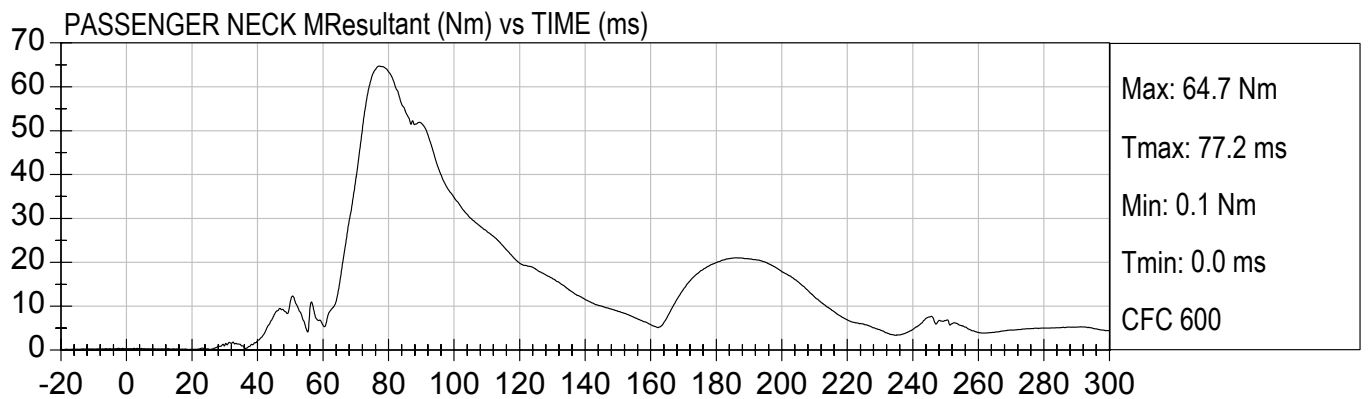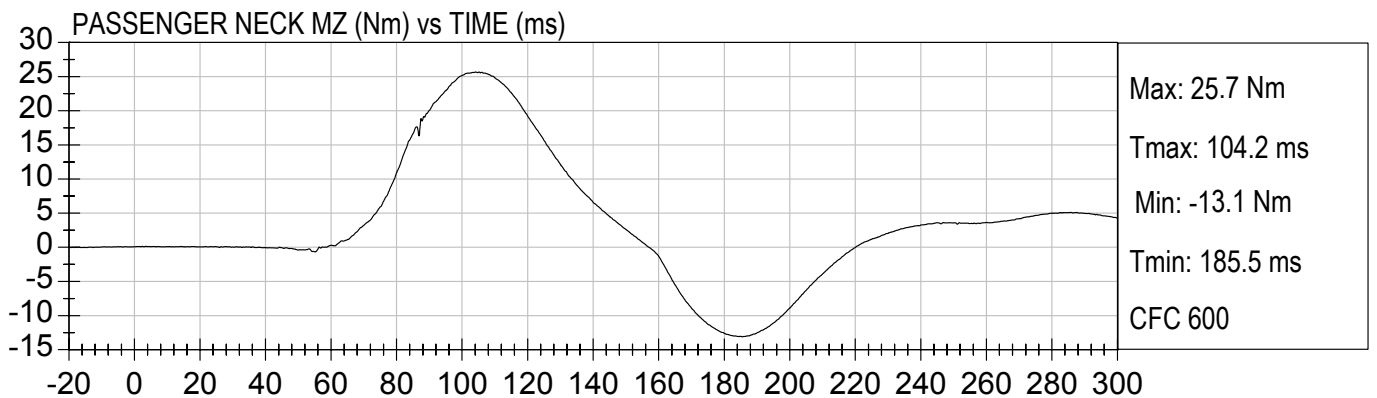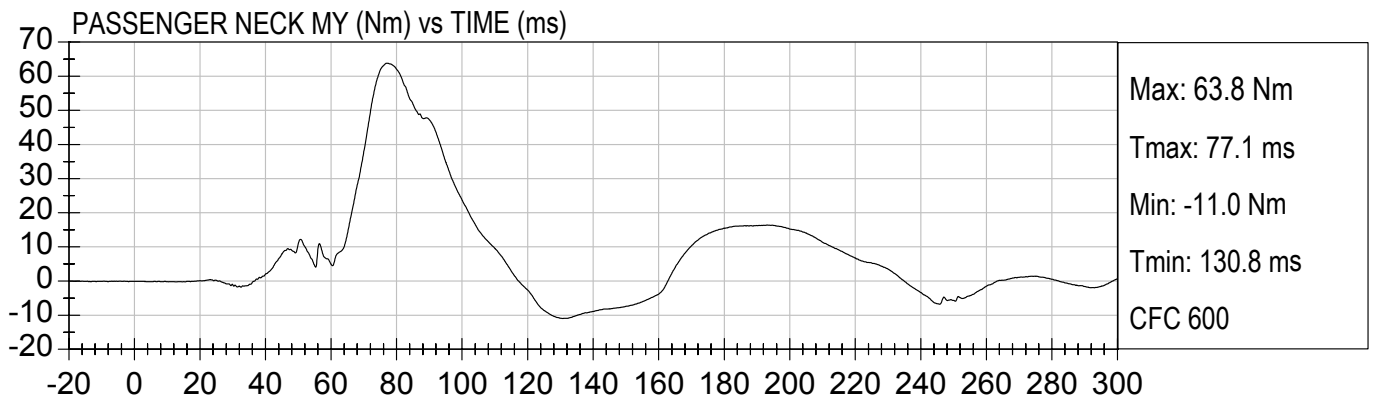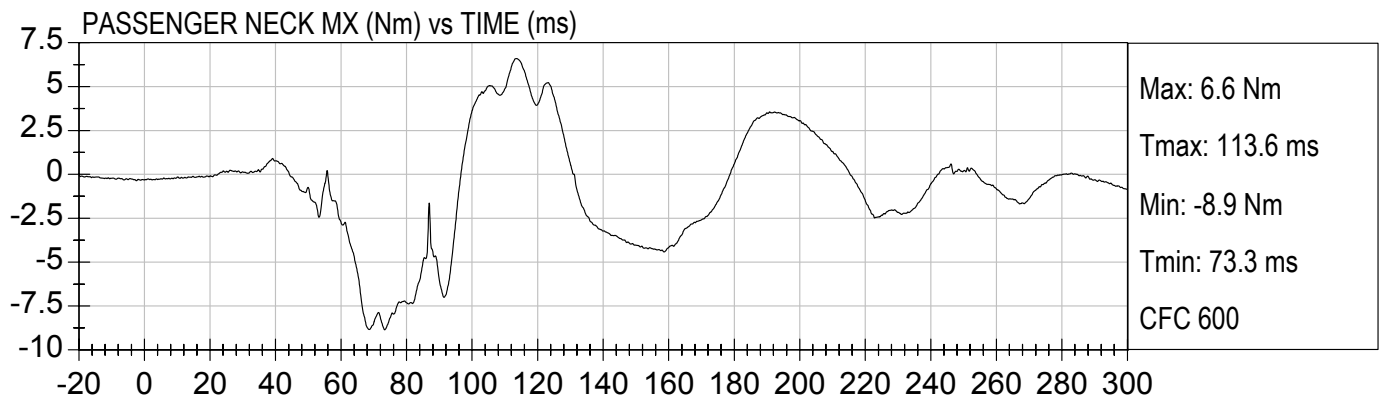



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO





Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

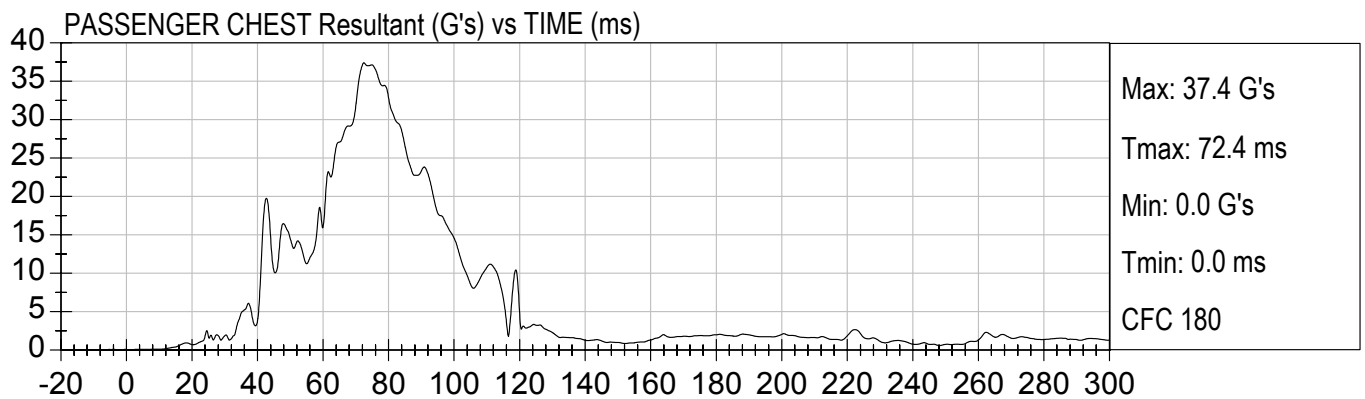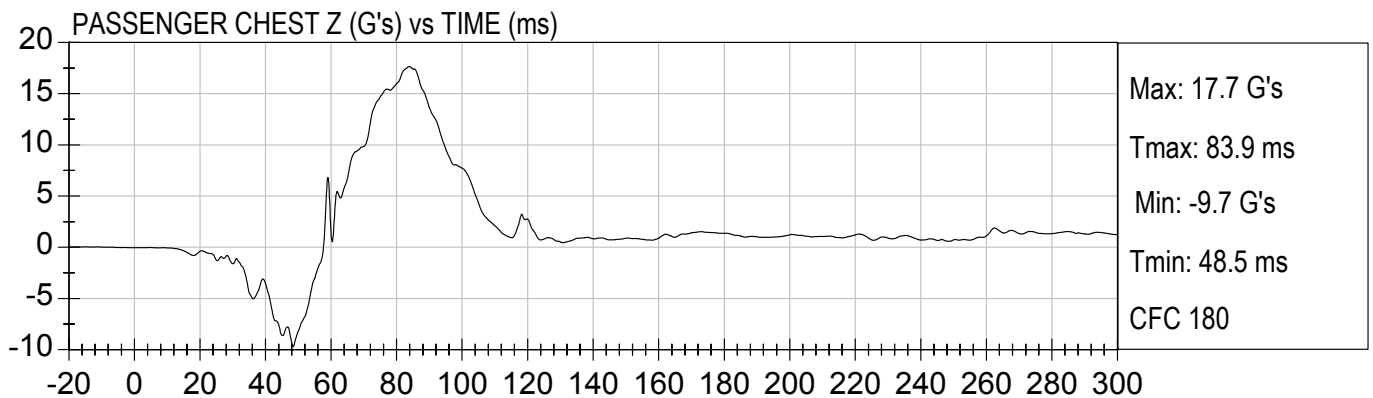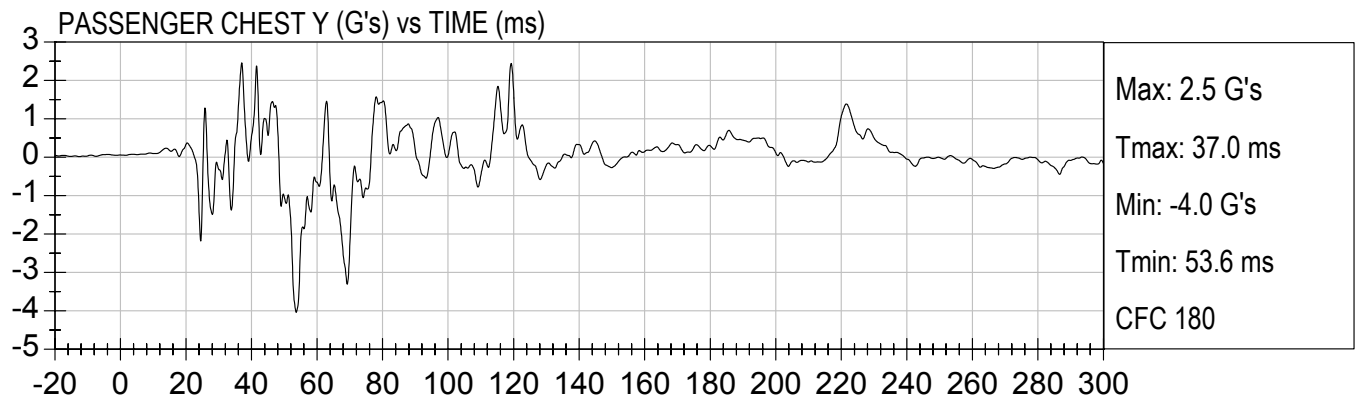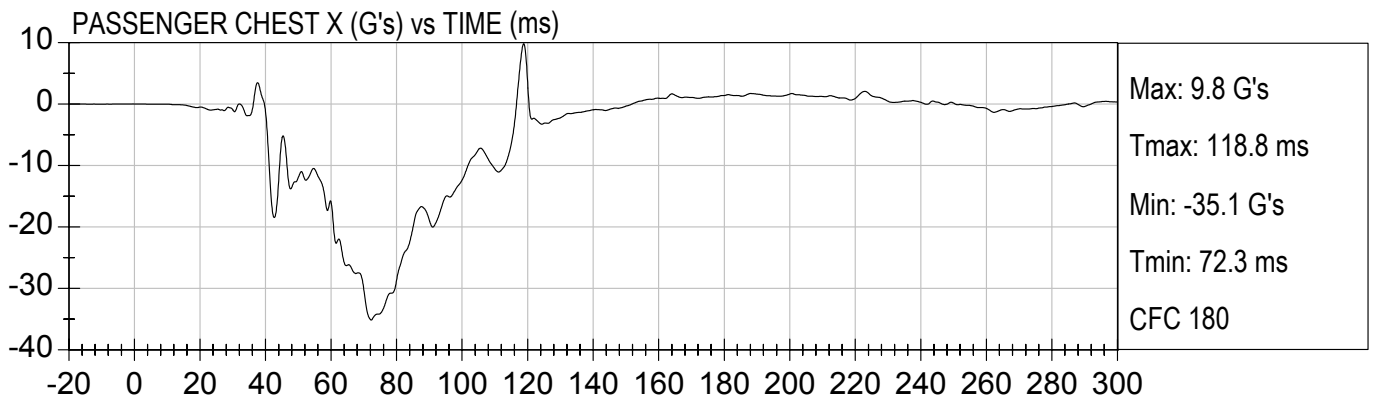



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO



Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

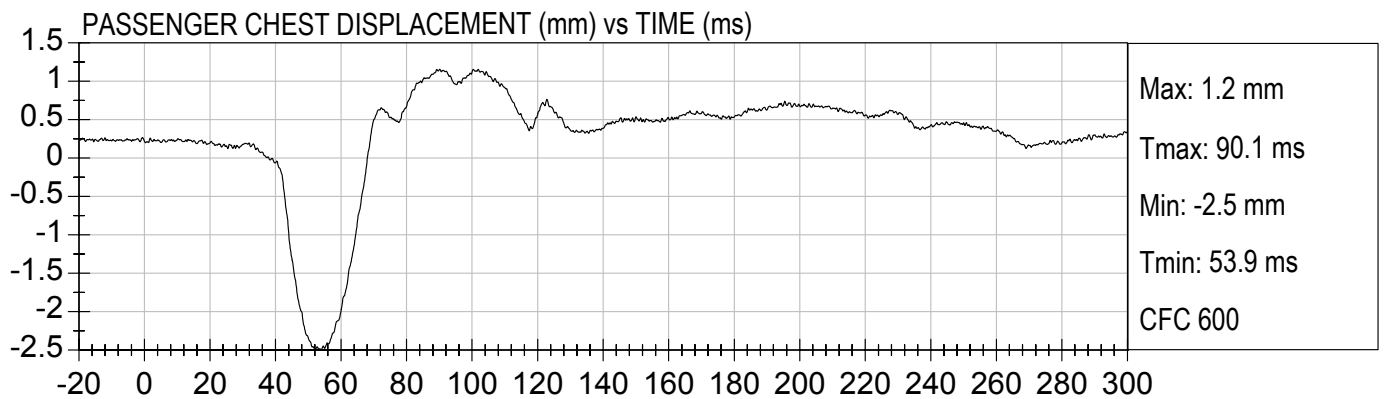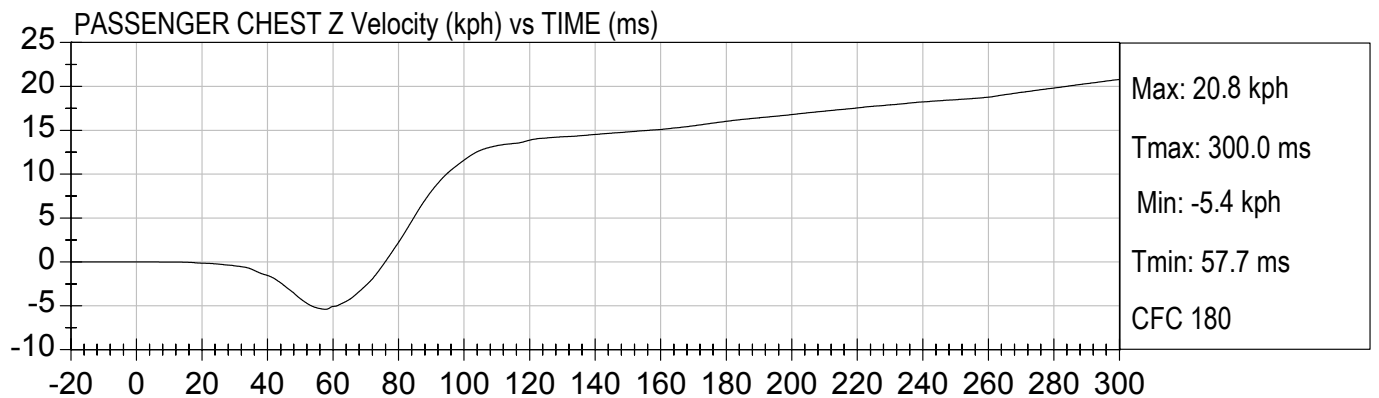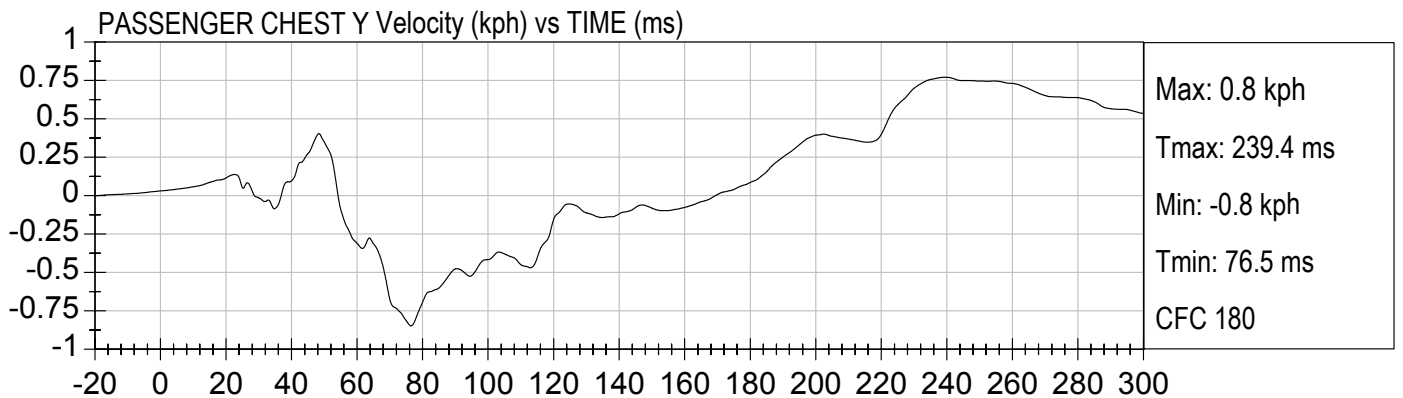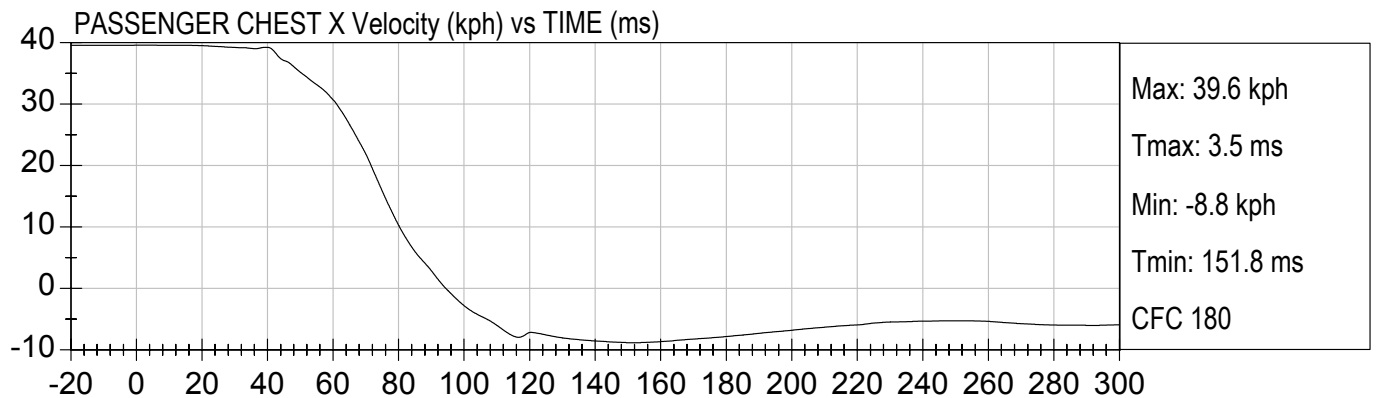



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO





Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

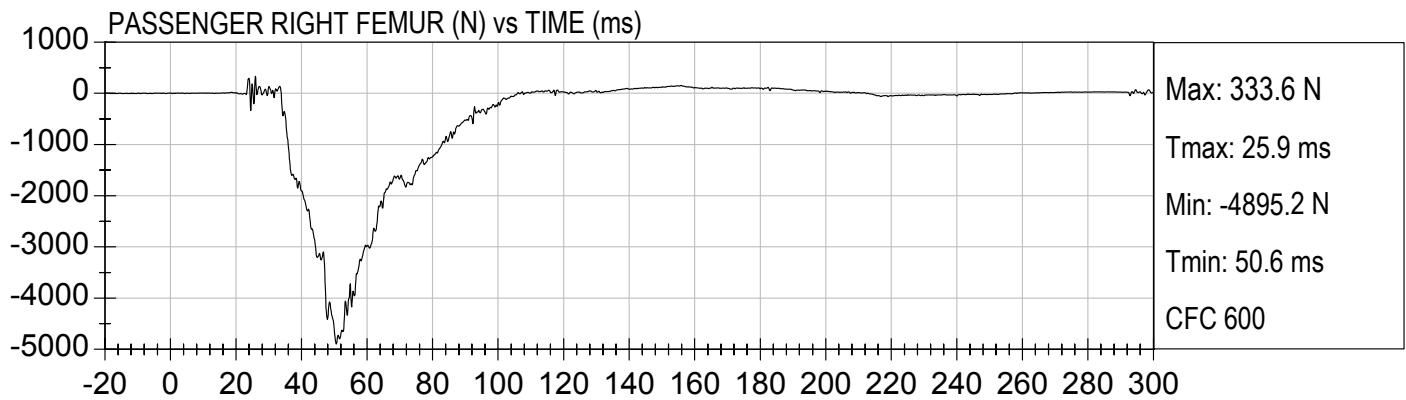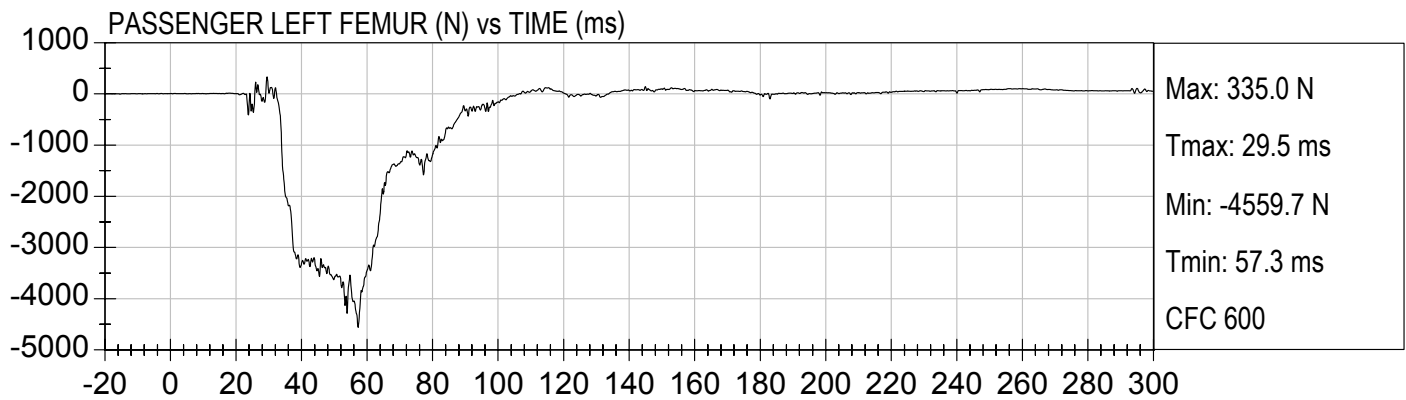



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO




Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

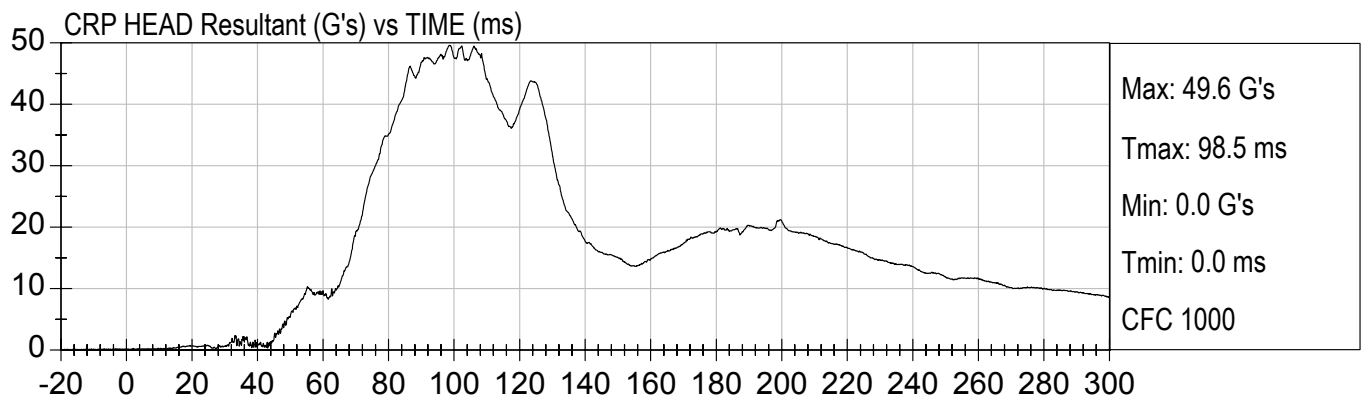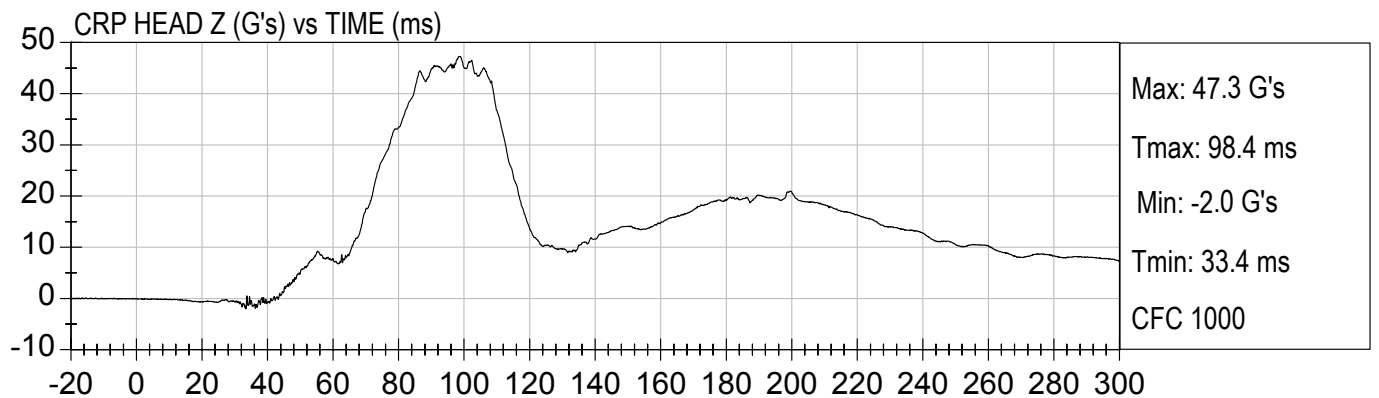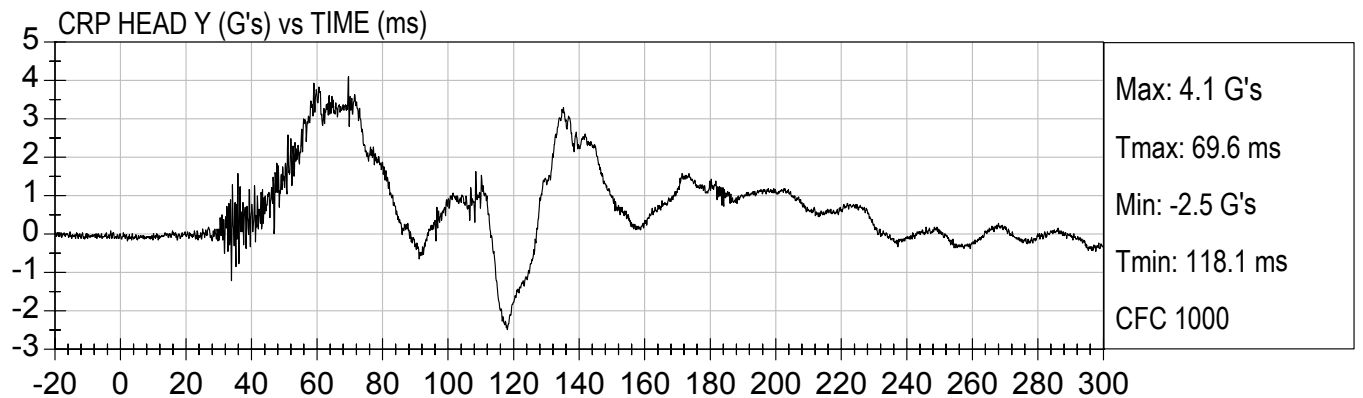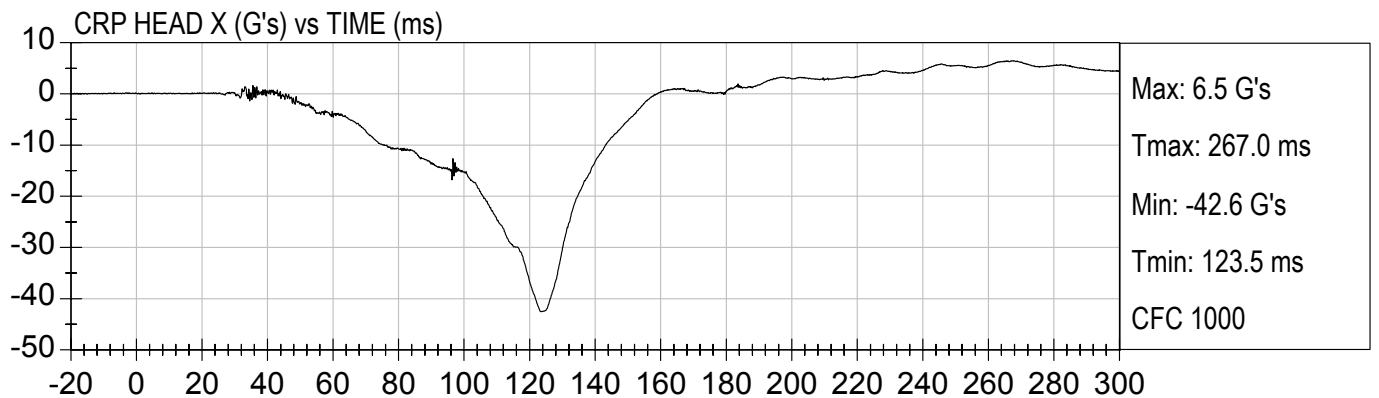



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO





Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

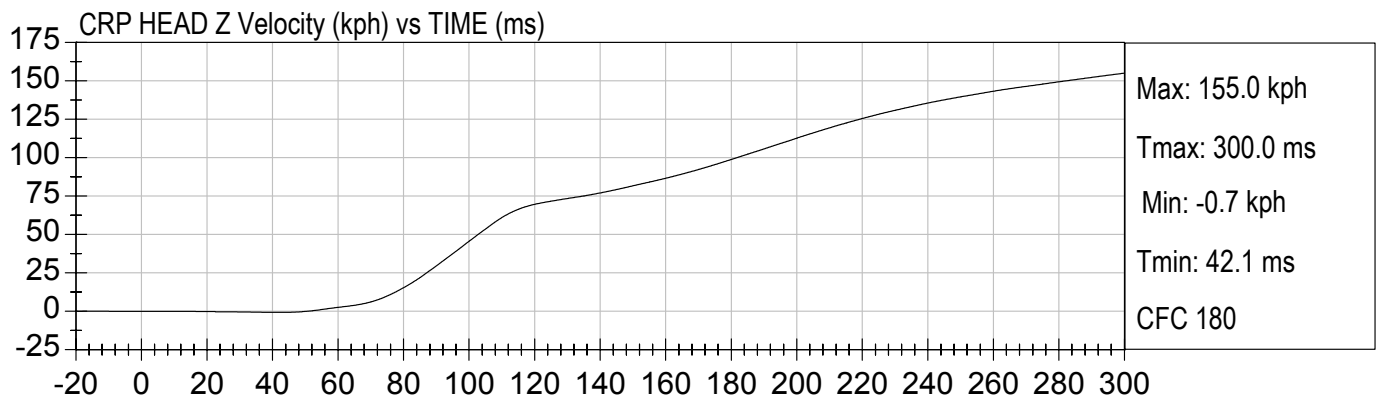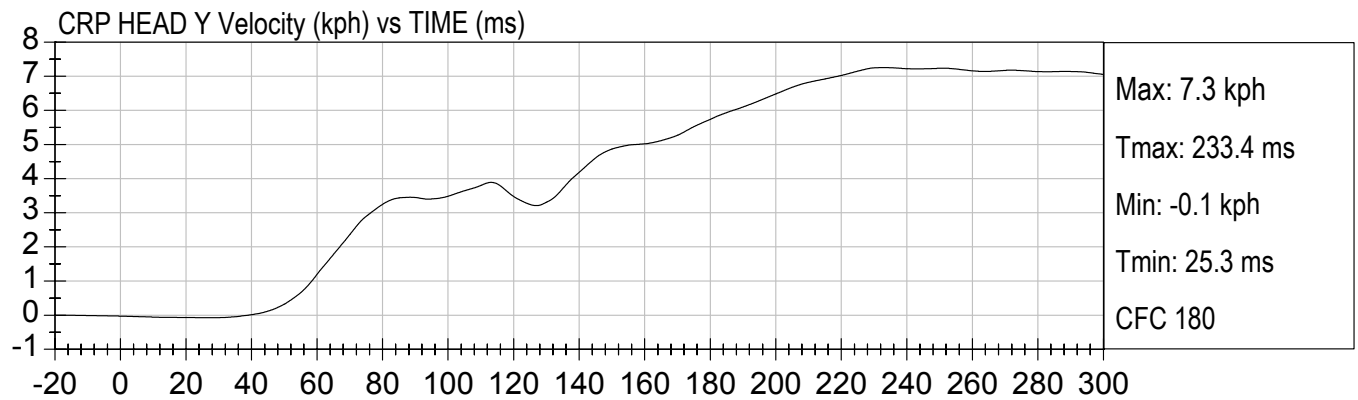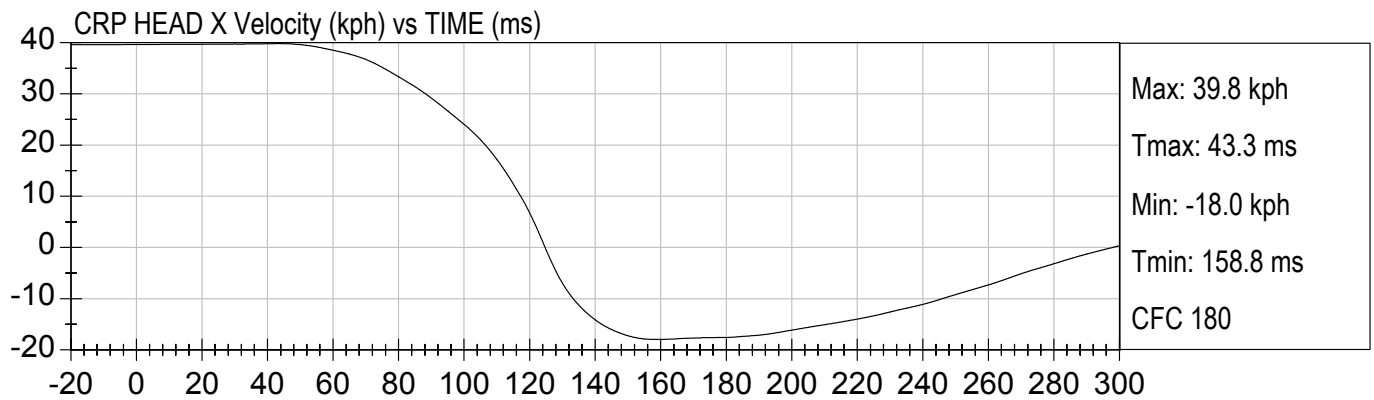



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO





Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

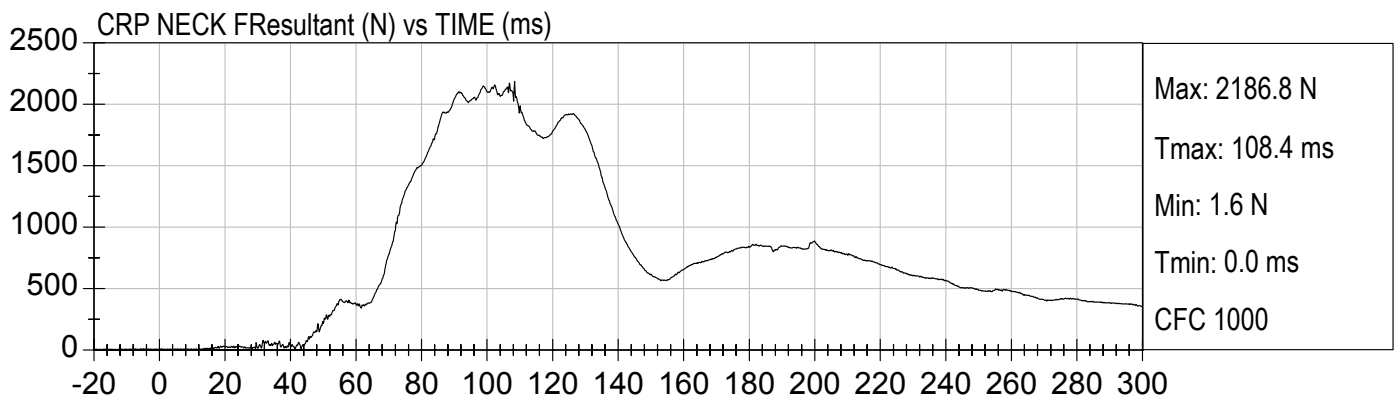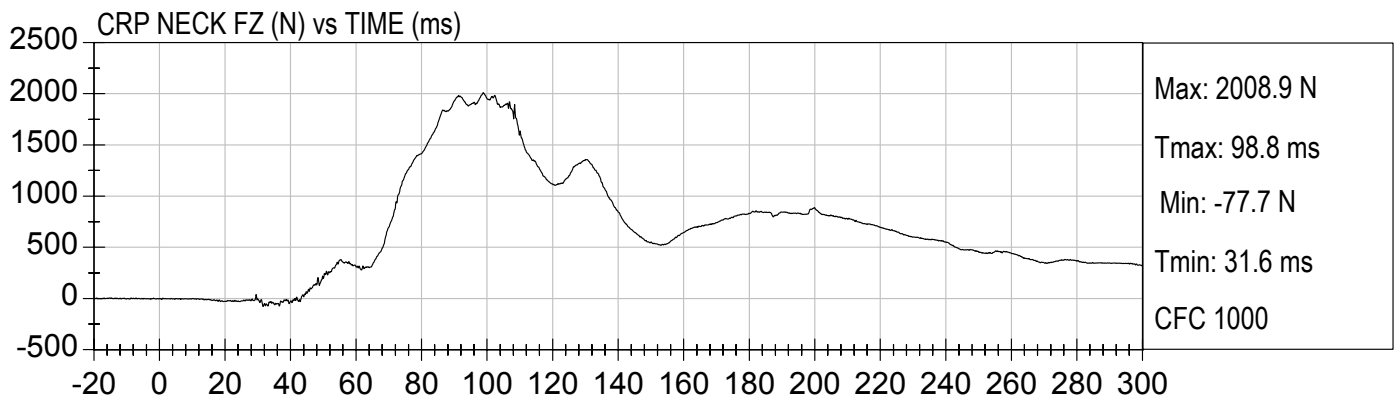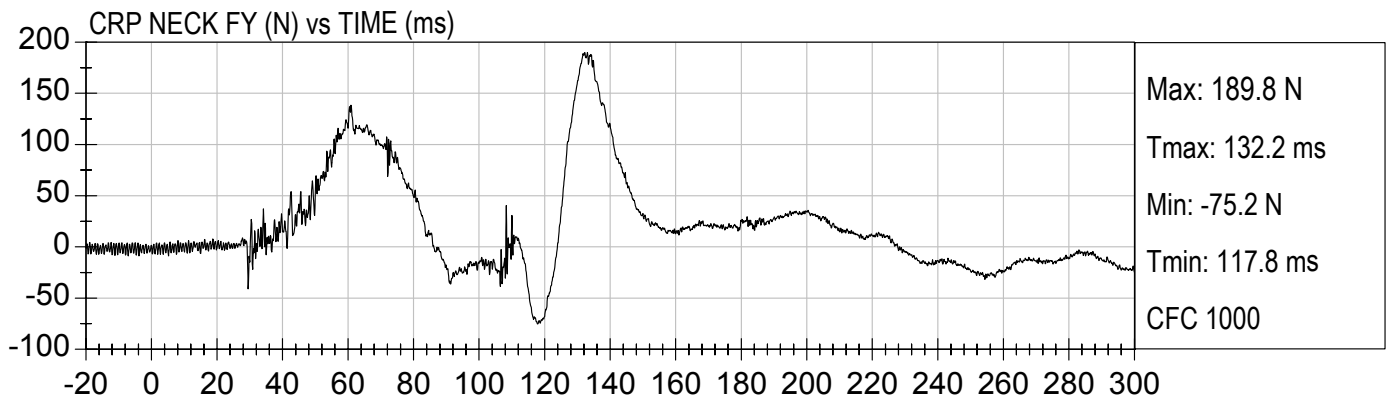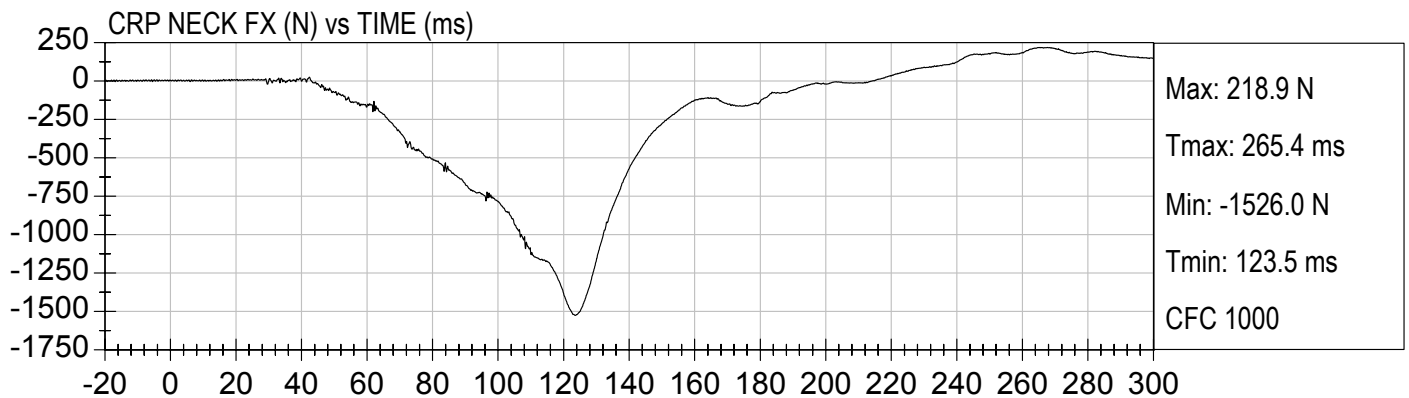



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO





Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

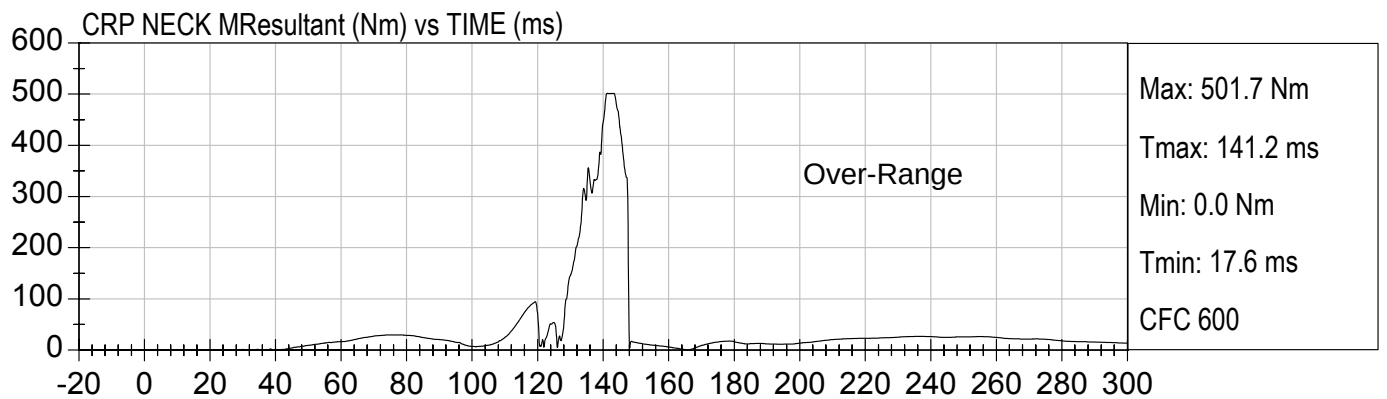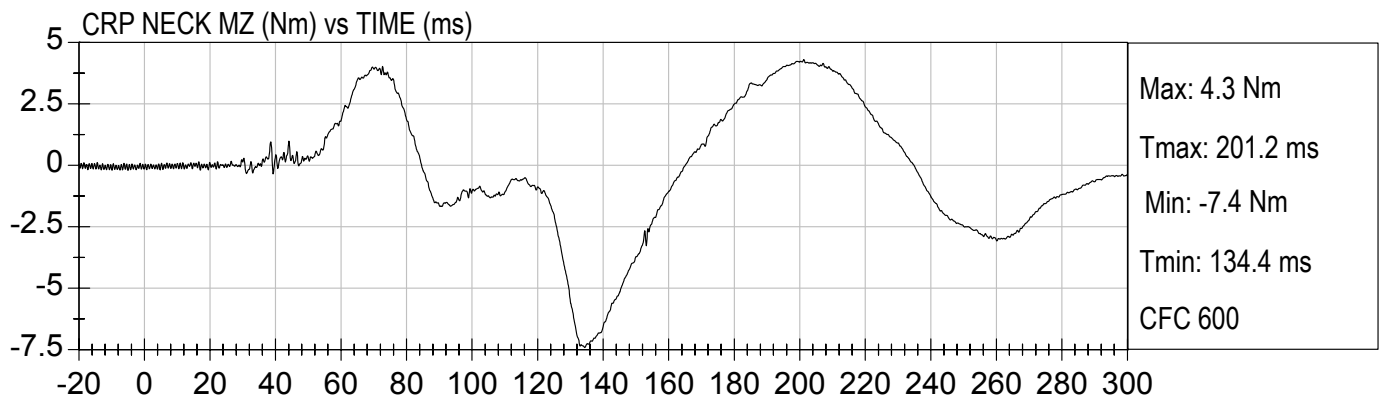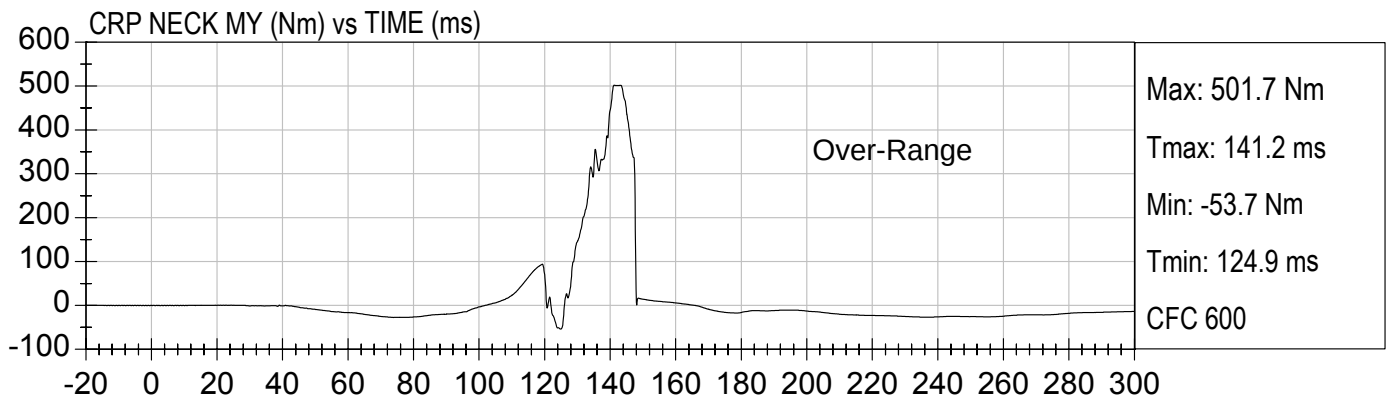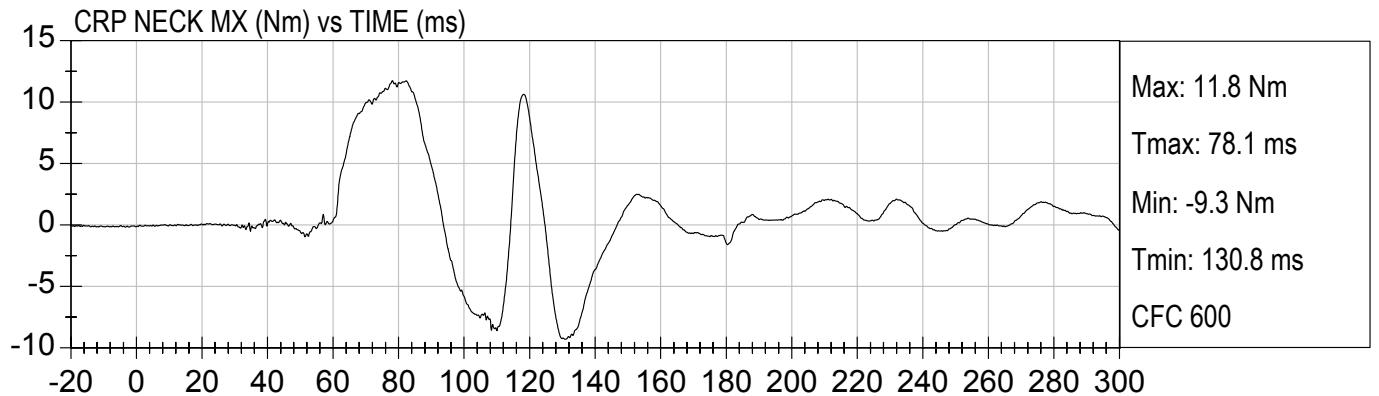



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO





Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

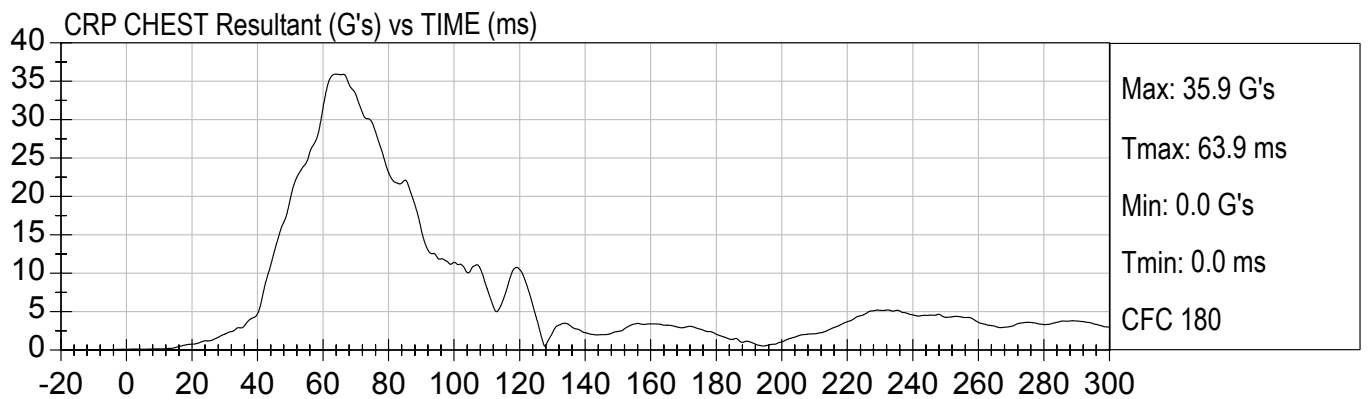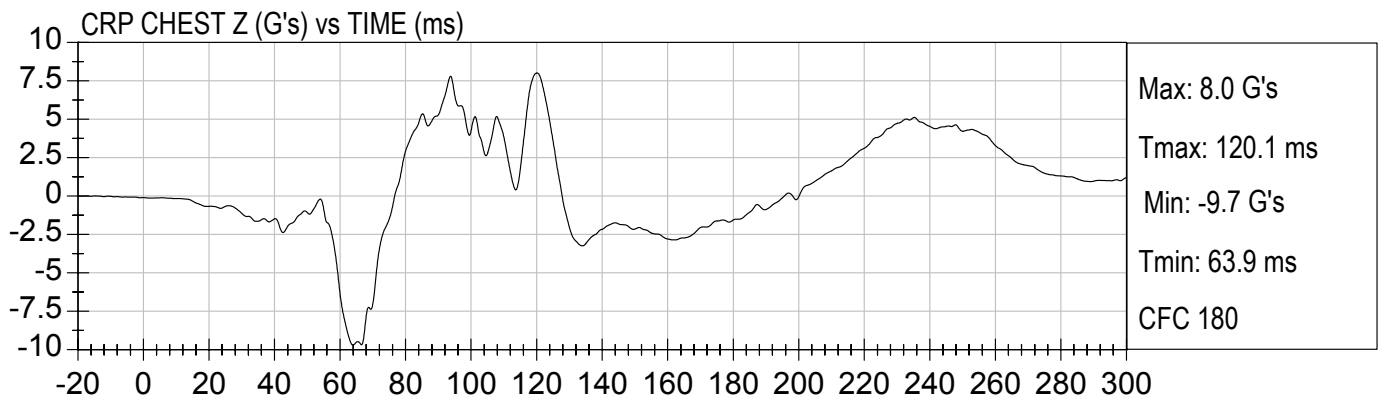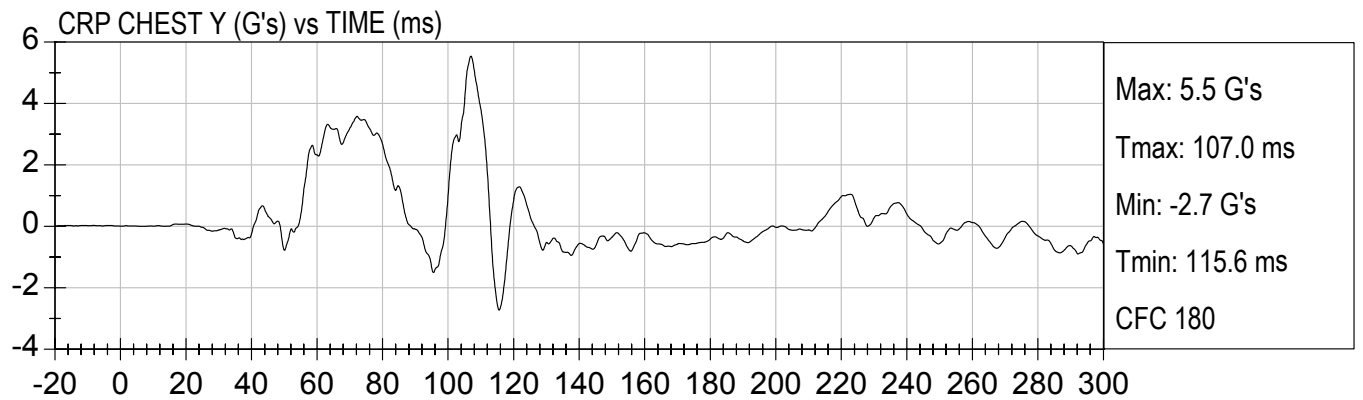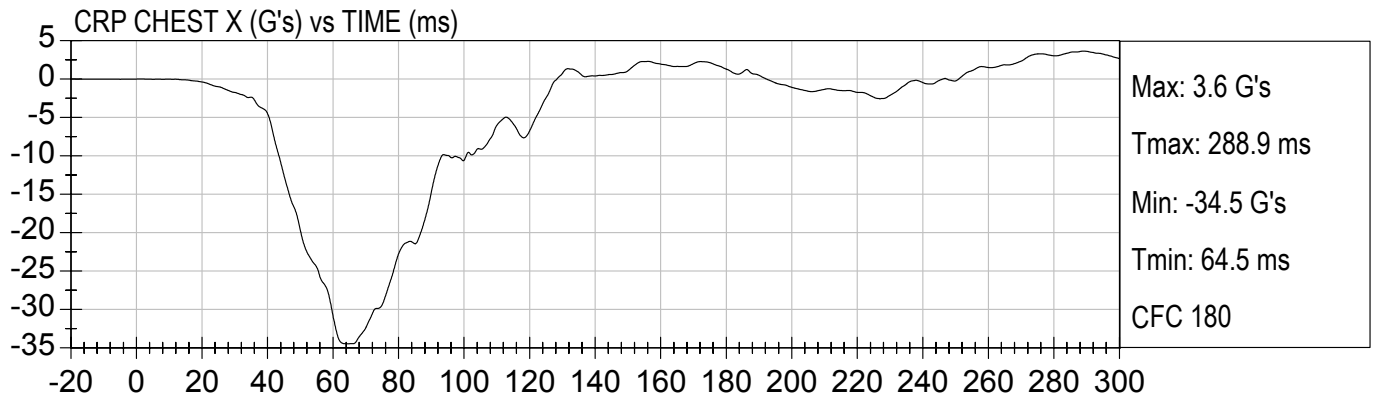



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO

Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

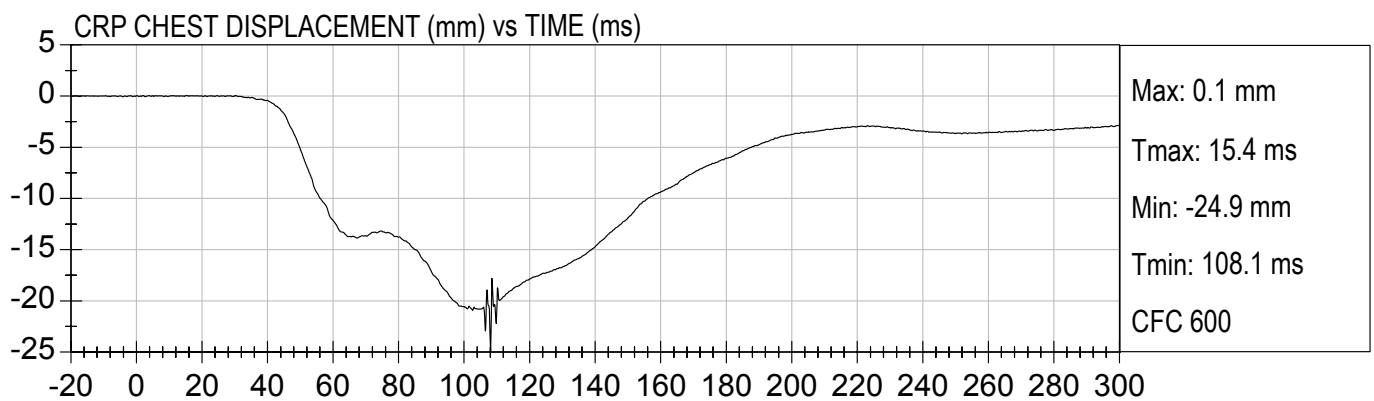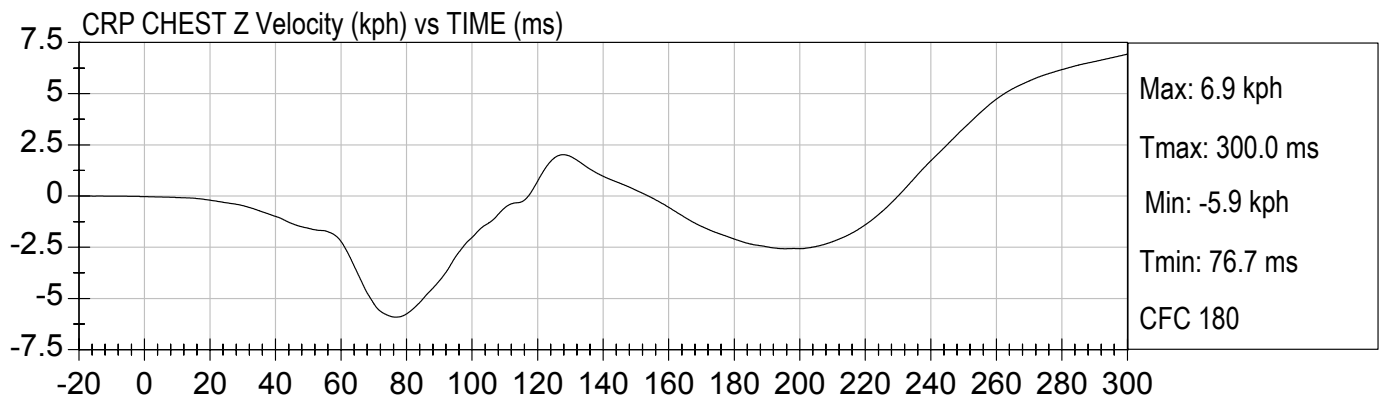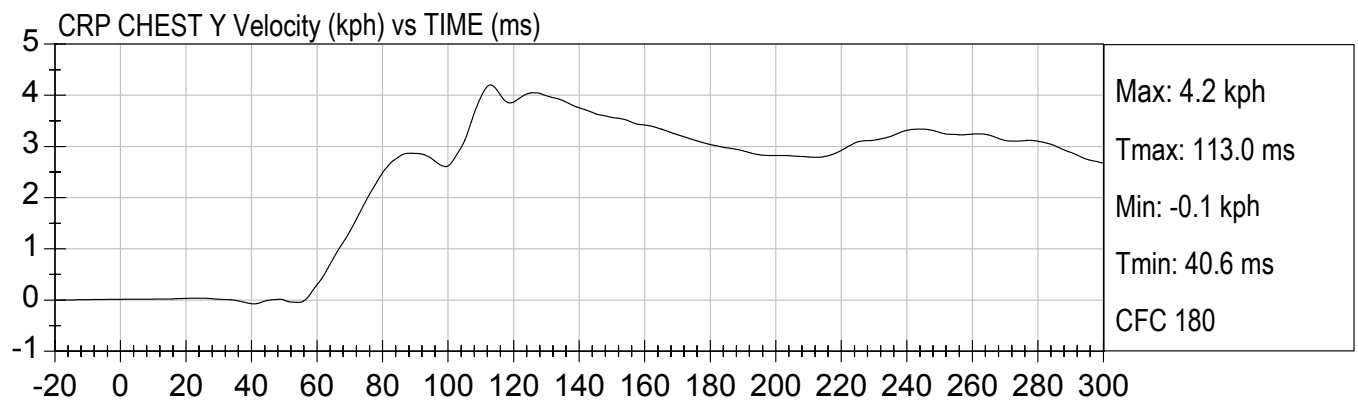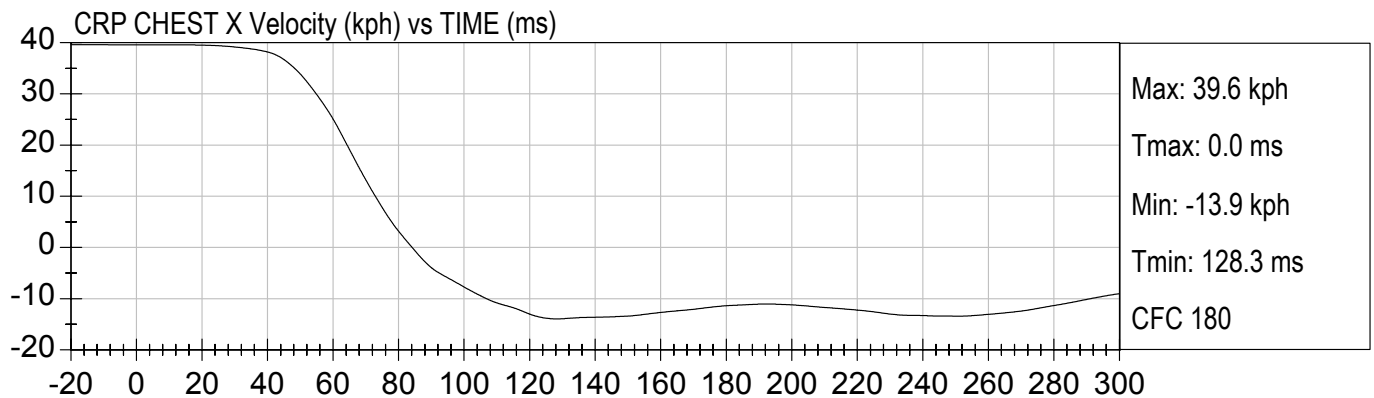





25MPH FRONTAL UNBELTED
2004 DODGE DURANGO

Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

CRP RIGHT FEMUR (N) vs TIME (ms)

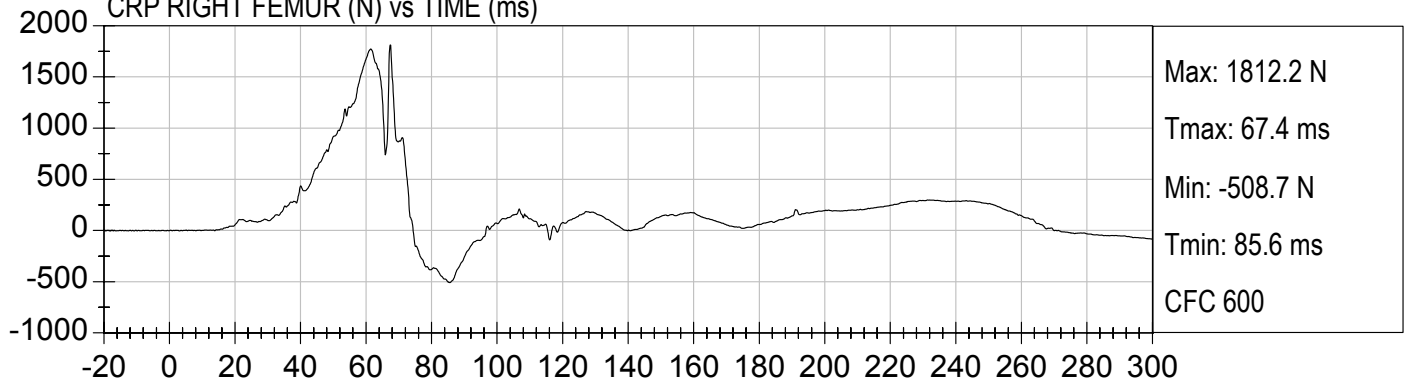




CRP LEFT FEMUR (N) vs TIME (ms)

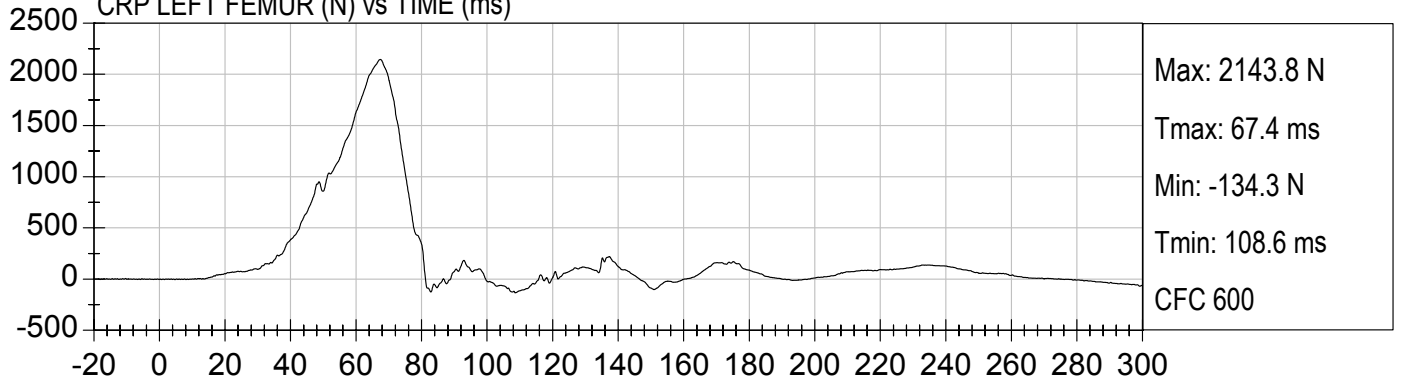



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO





Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

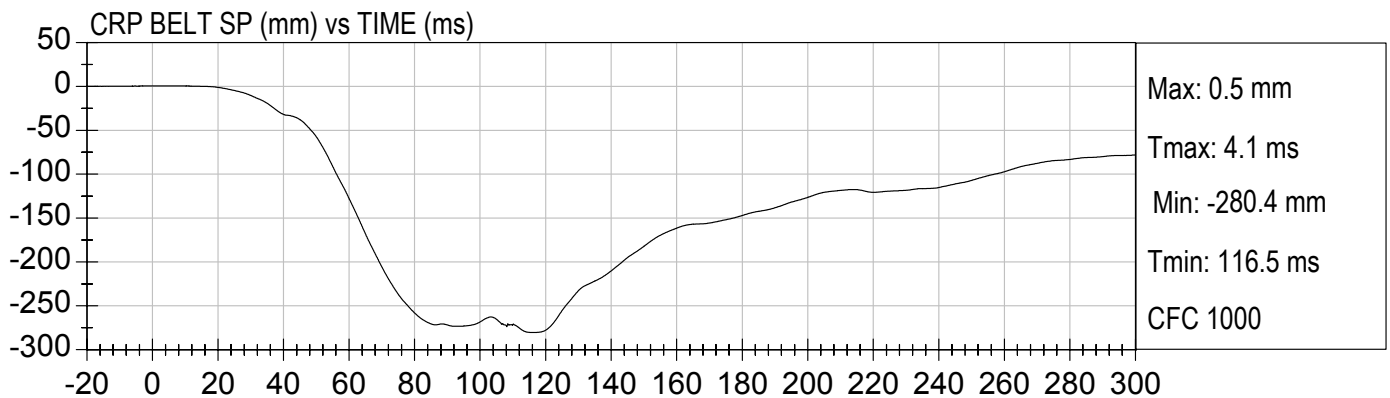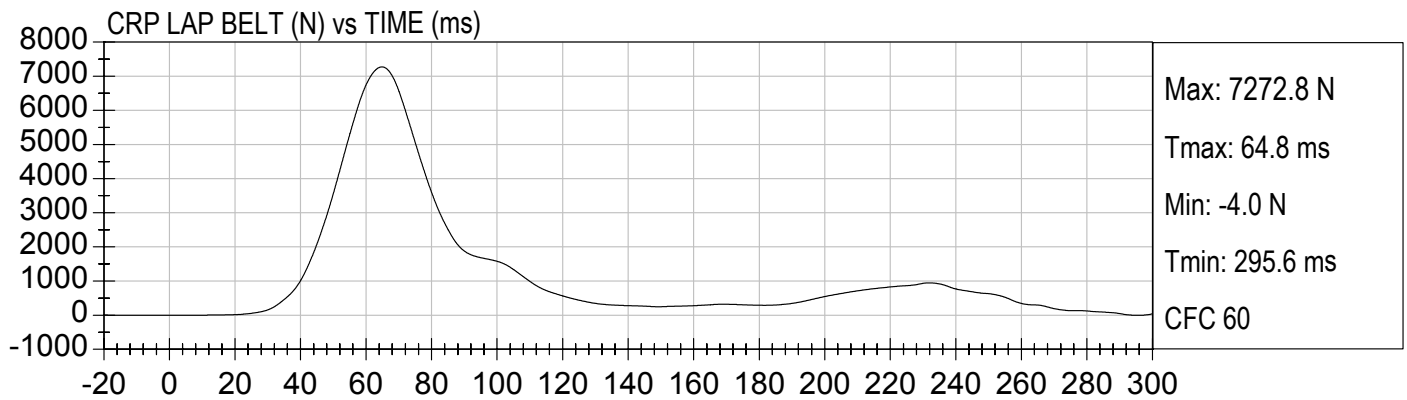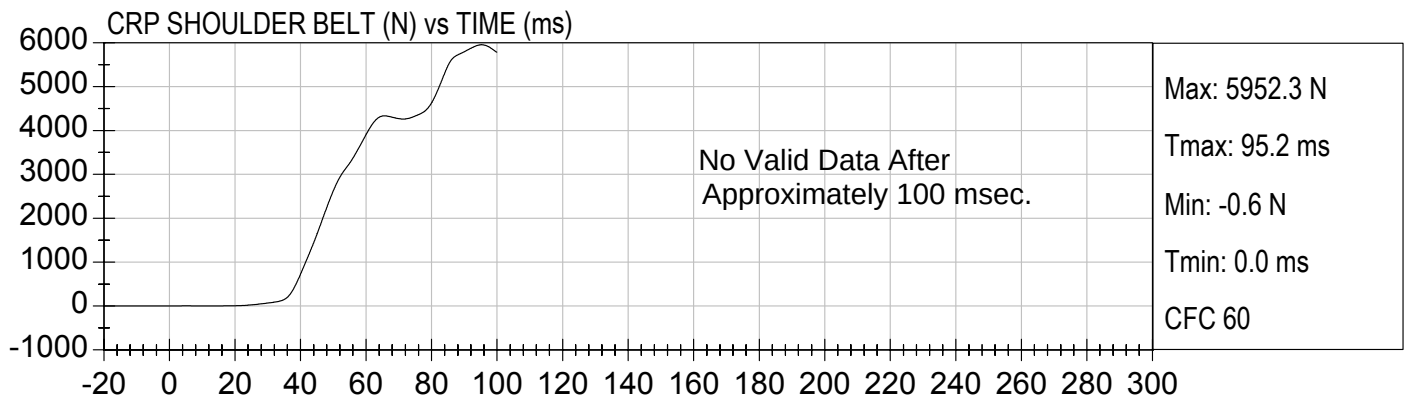



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO

Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

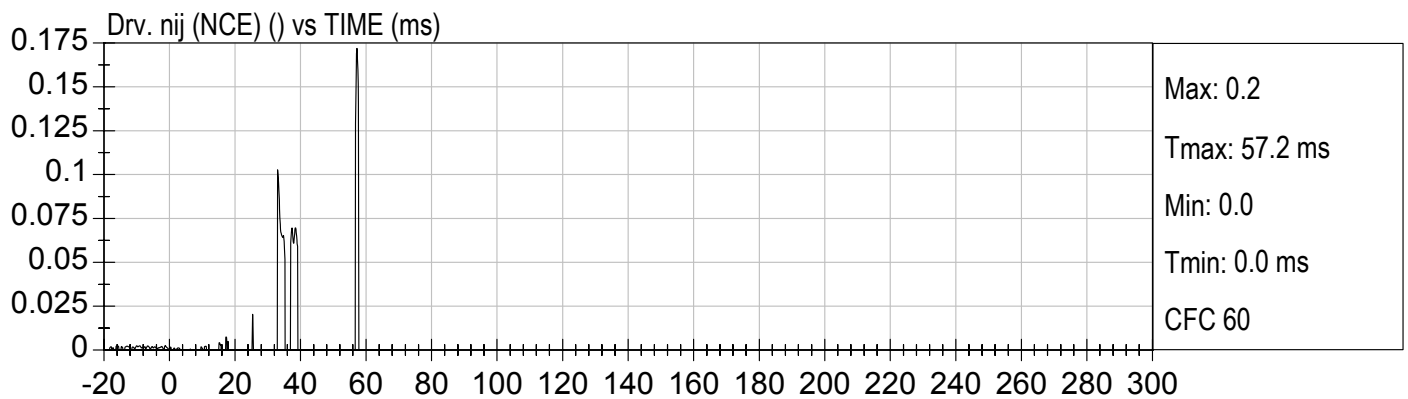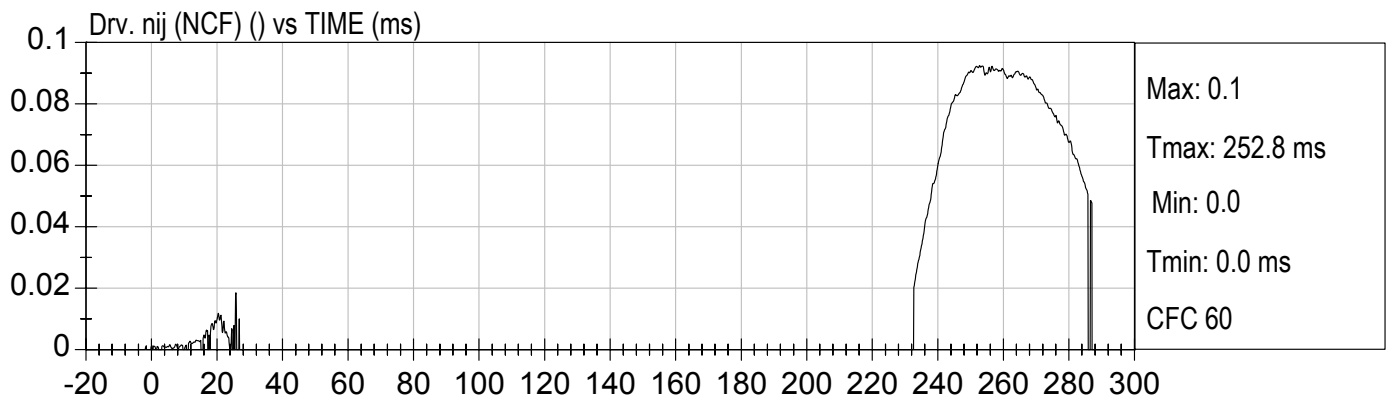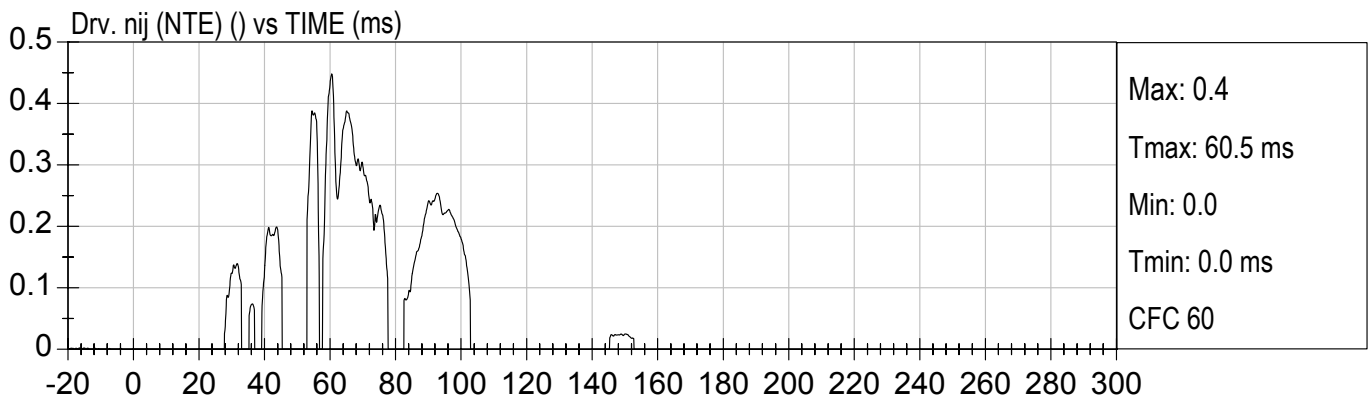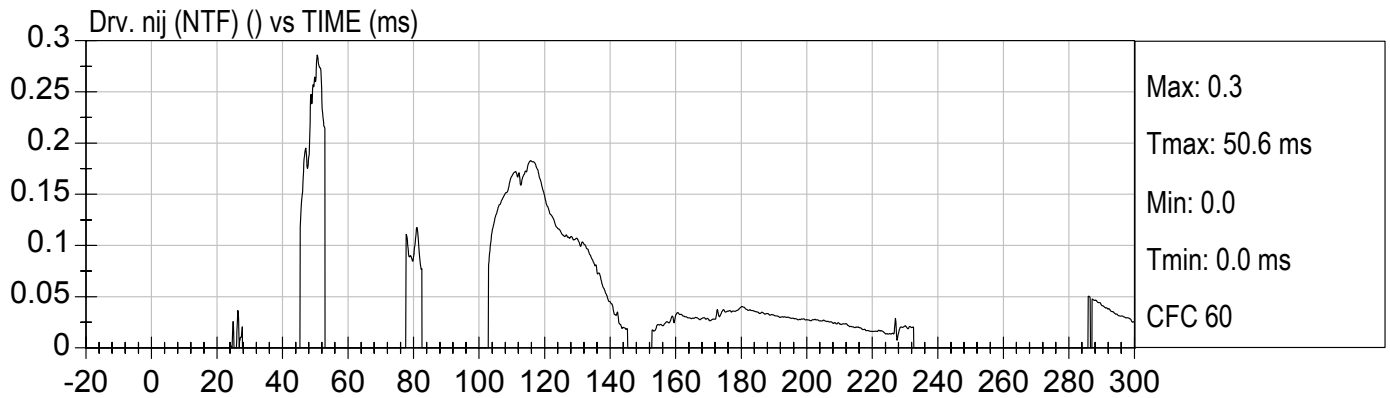





25MPH FRONTAL UNBELTED
2004 DODGE DURANGO

Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)


Pass. nij (NTF) () vs TIME (ms)

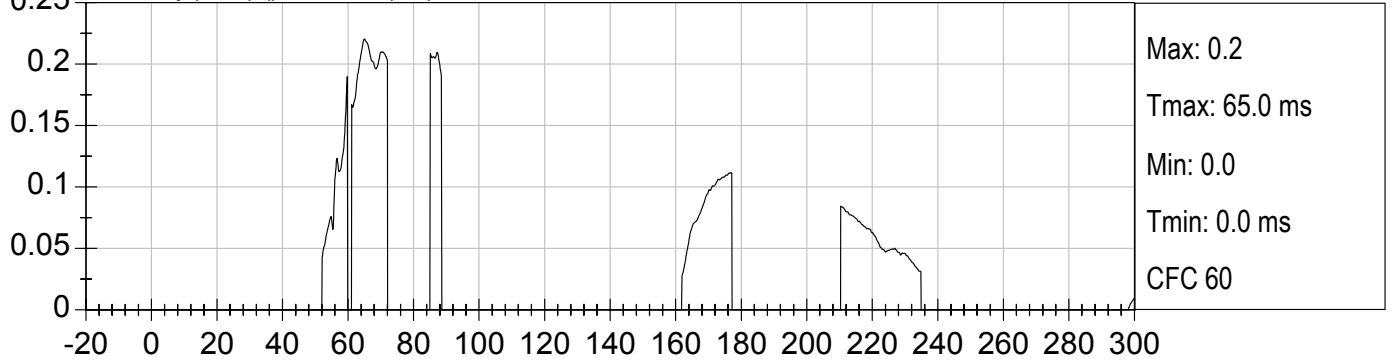


Pass. nij (NTE) () vs TIME (ms)

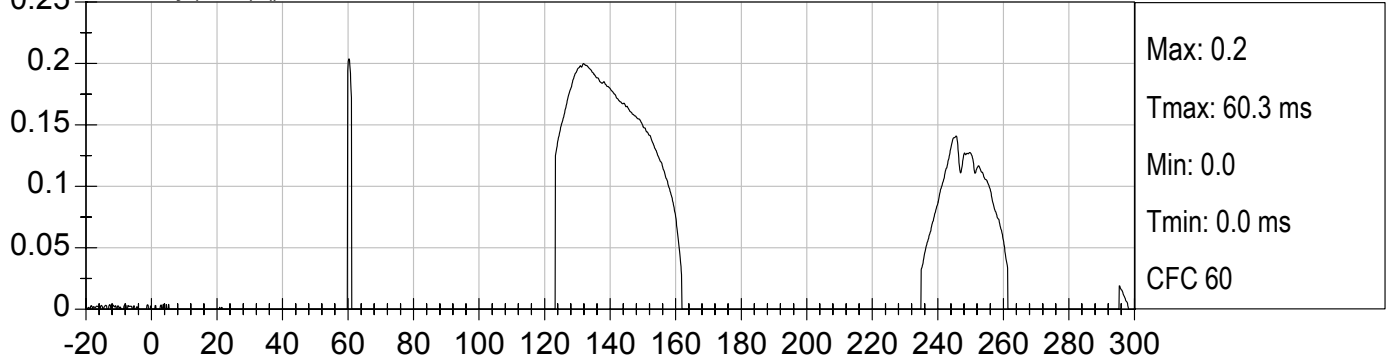

Pass. nij (NCF) () vs TIME (ms)

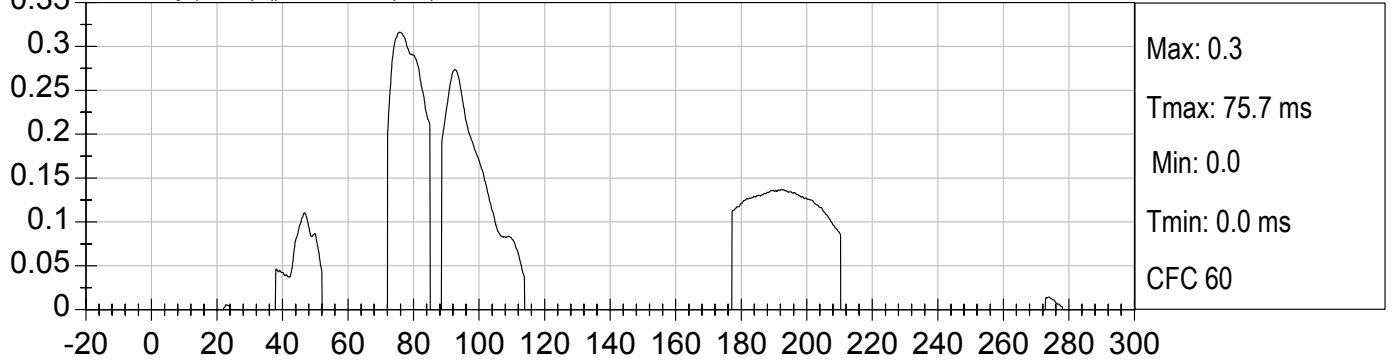





Pass. nij (NCE) () vs TIME (ms)

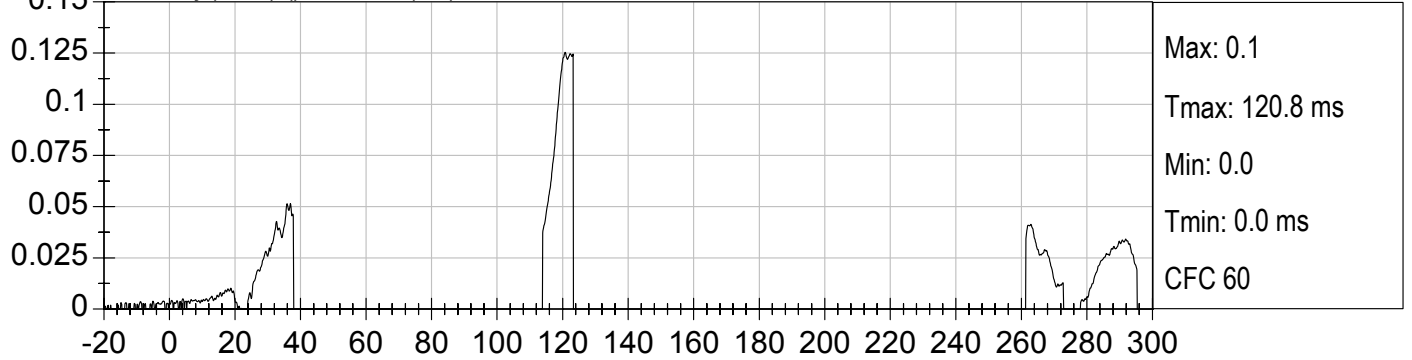



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO




Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

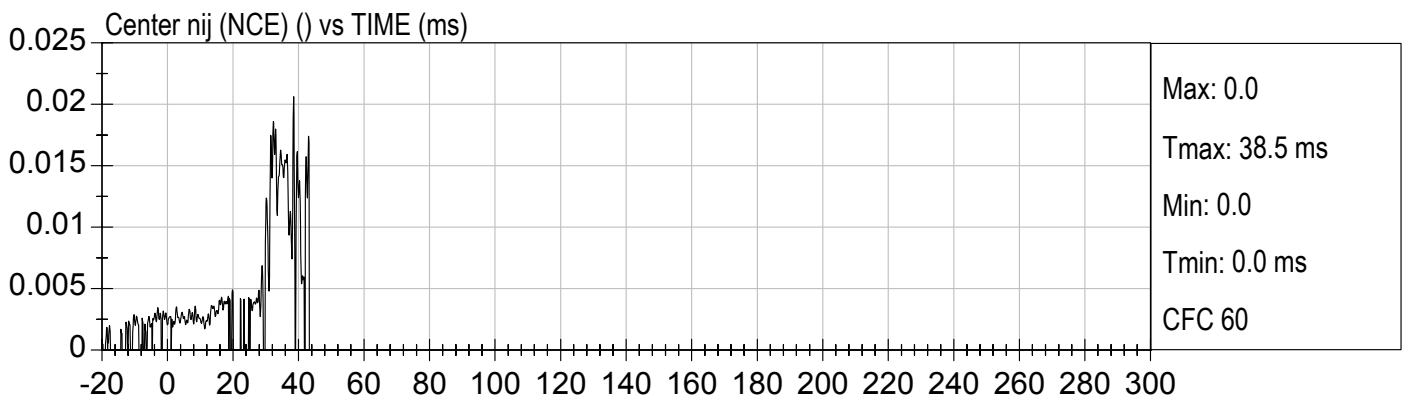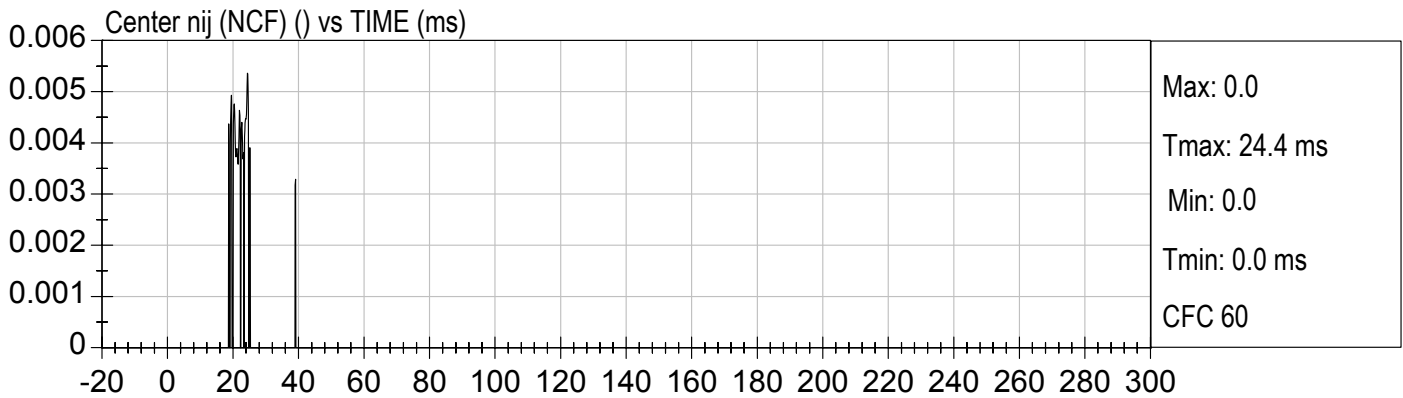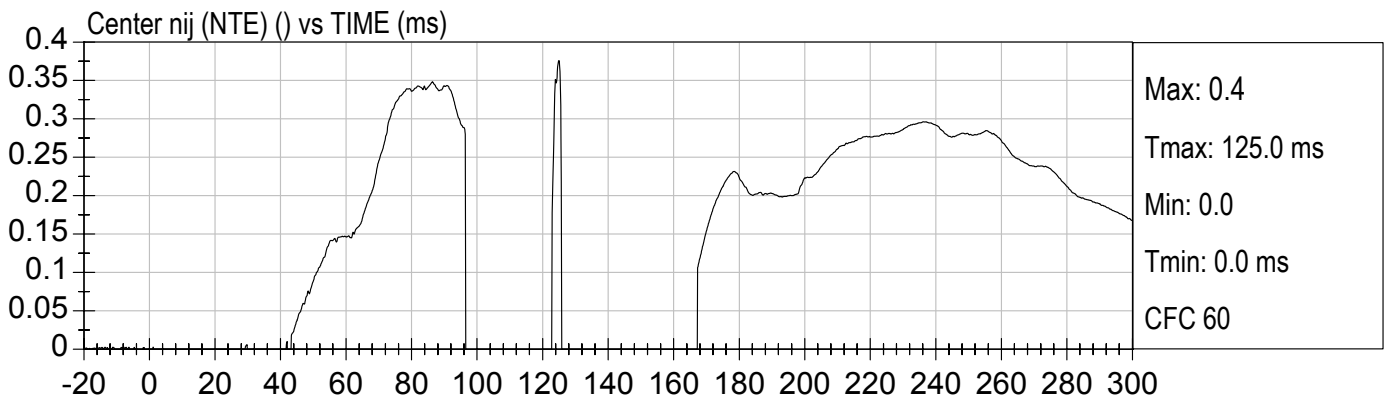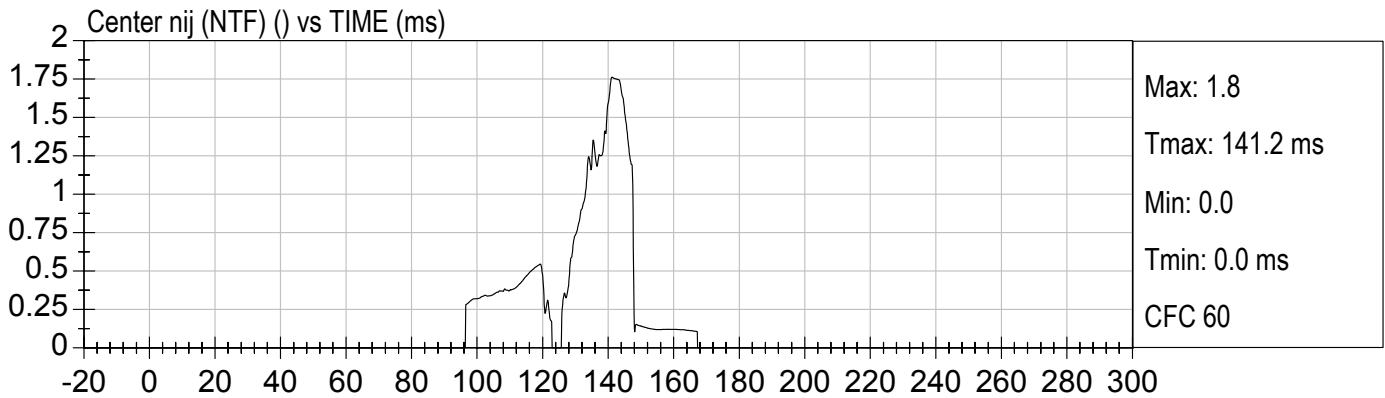



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO





Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)


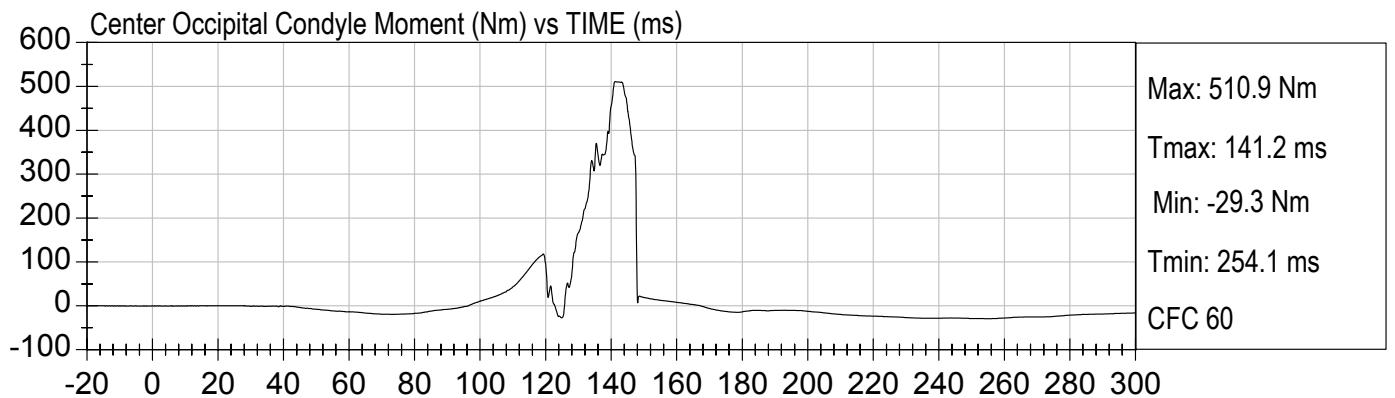
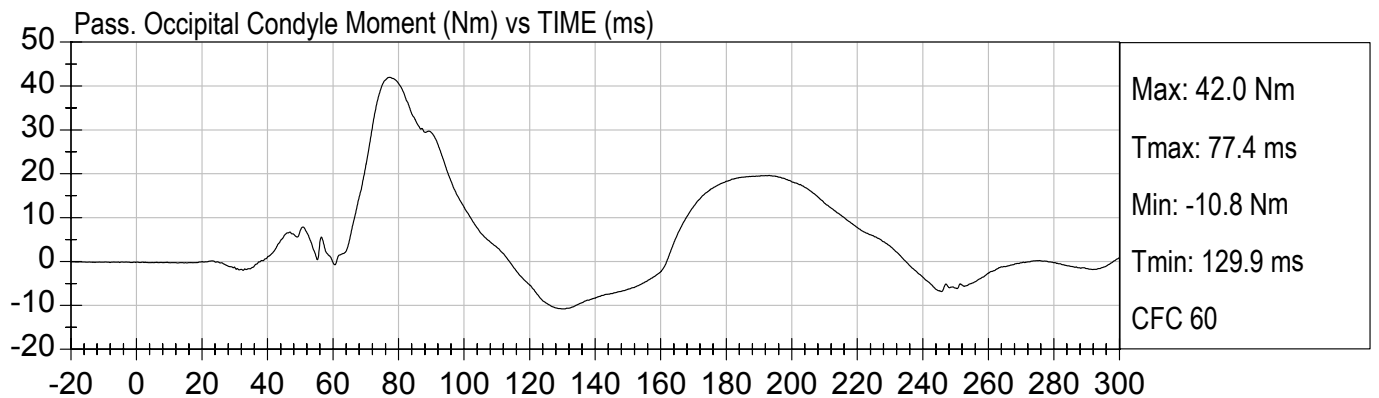
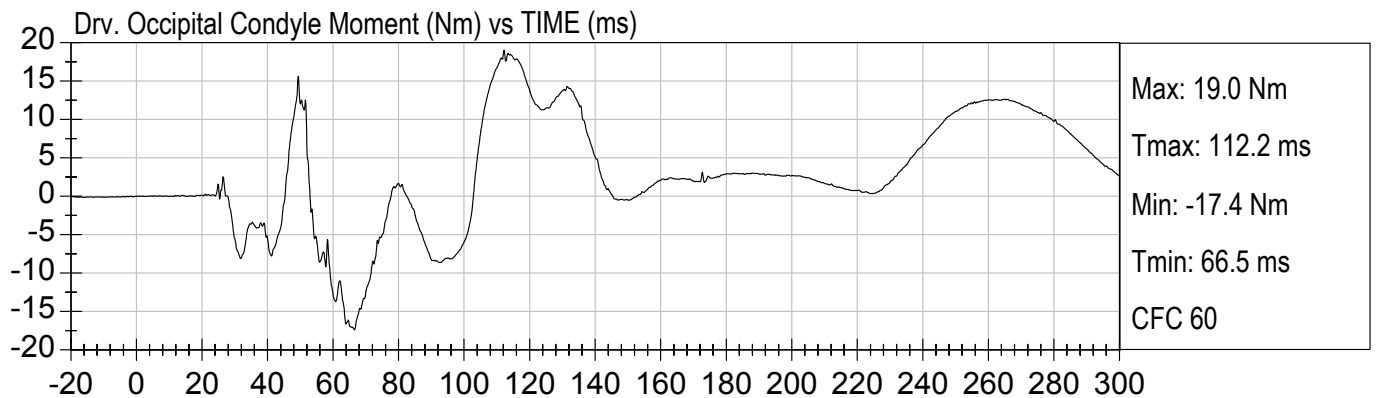




25MPH FRONTAL UNBELTED
2004 DODGE DURANGO

Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

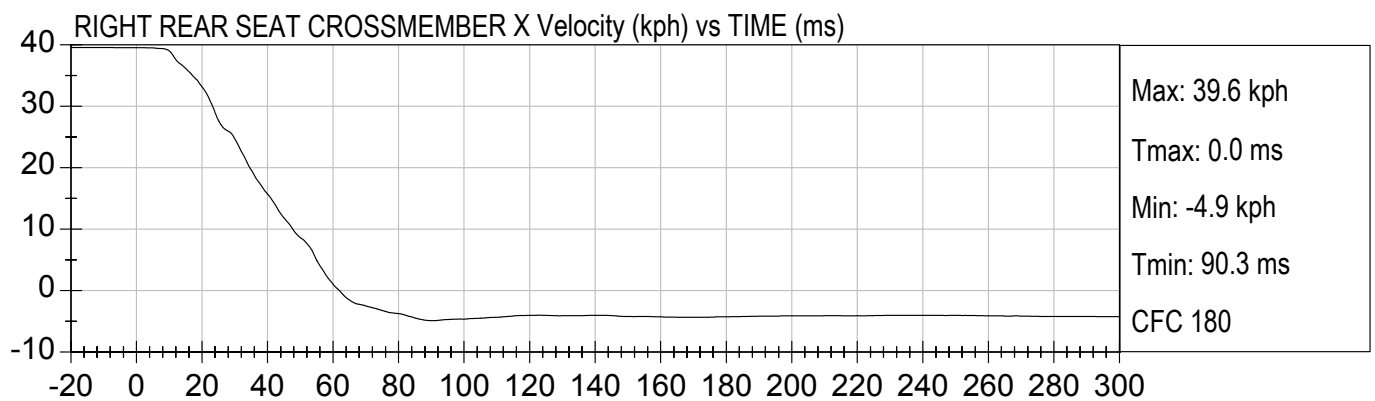
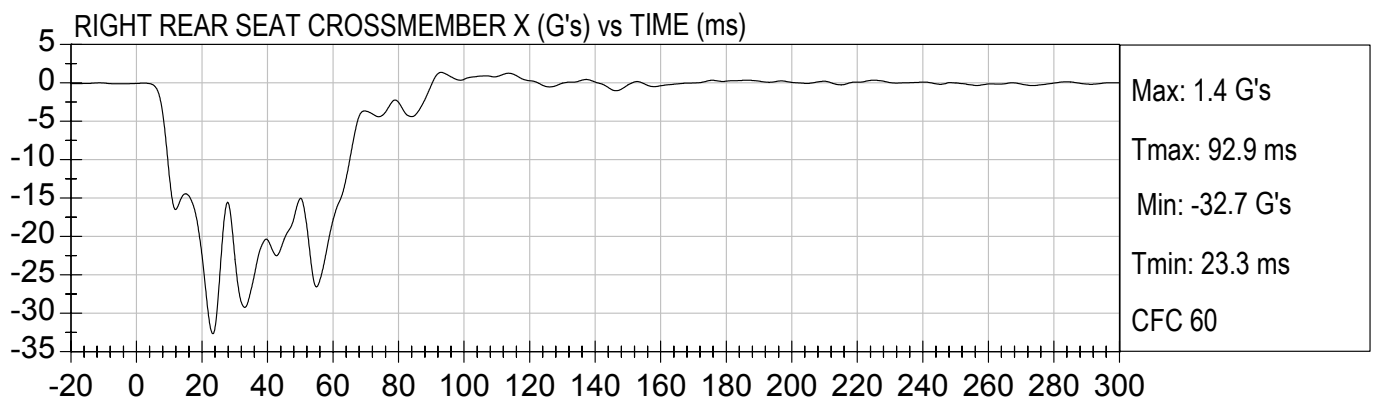
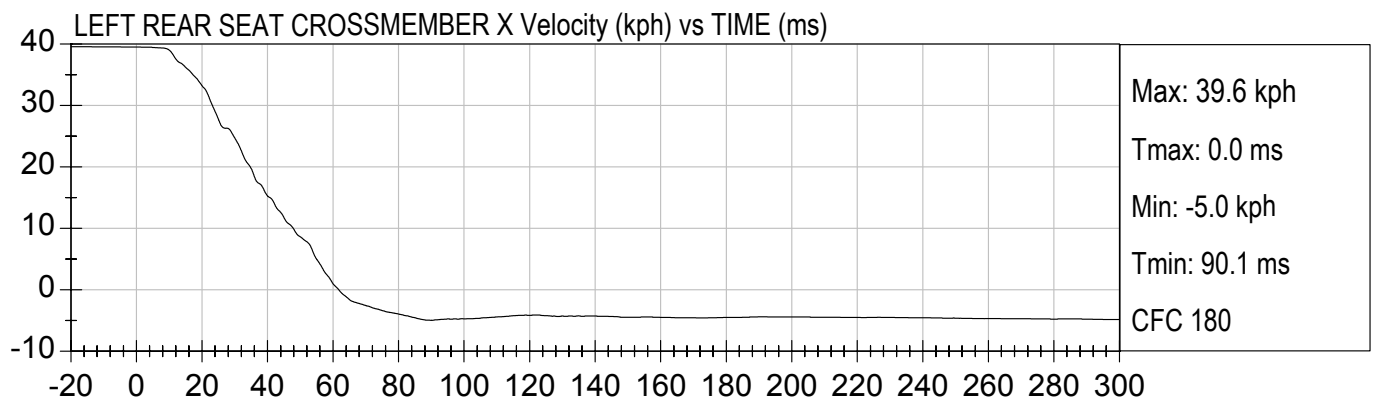
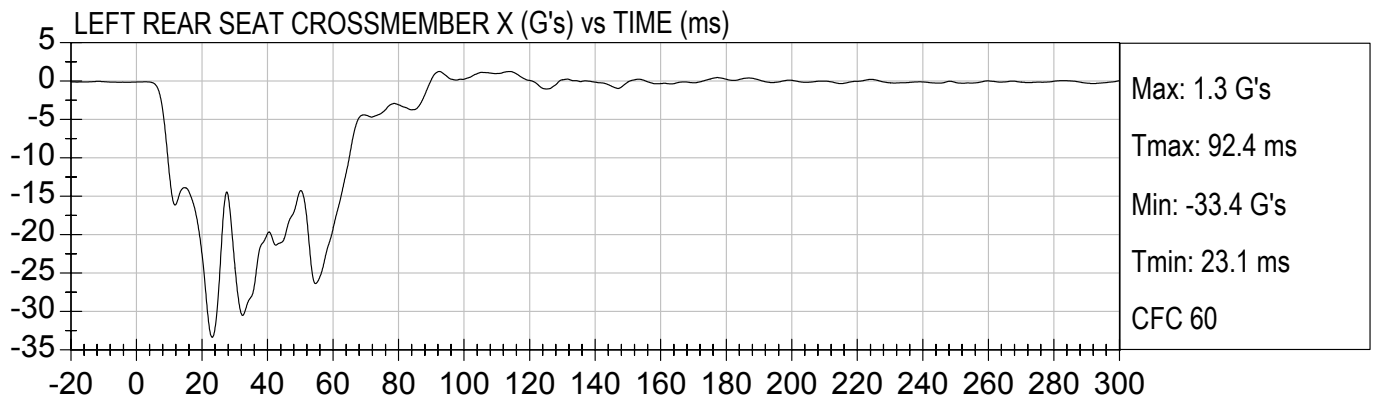


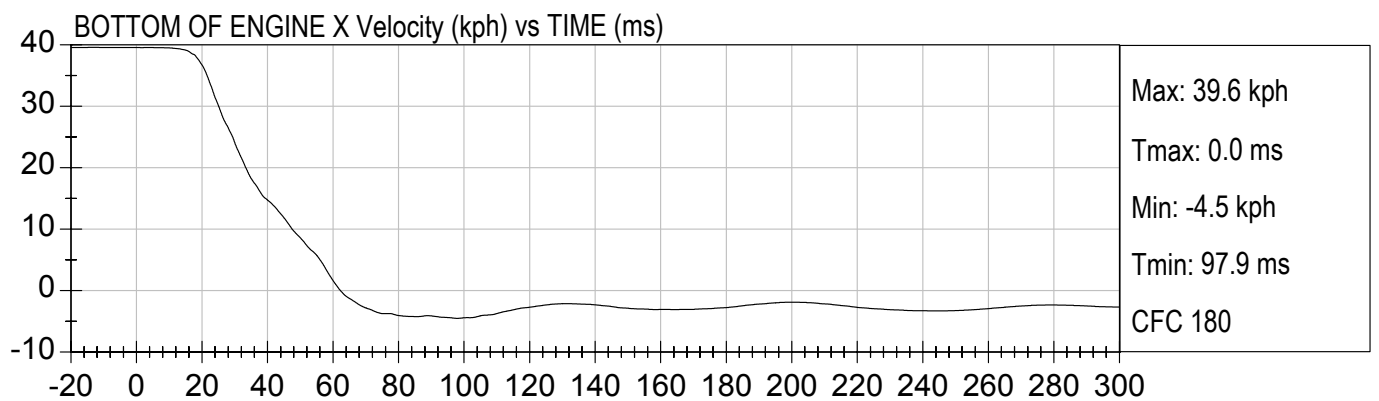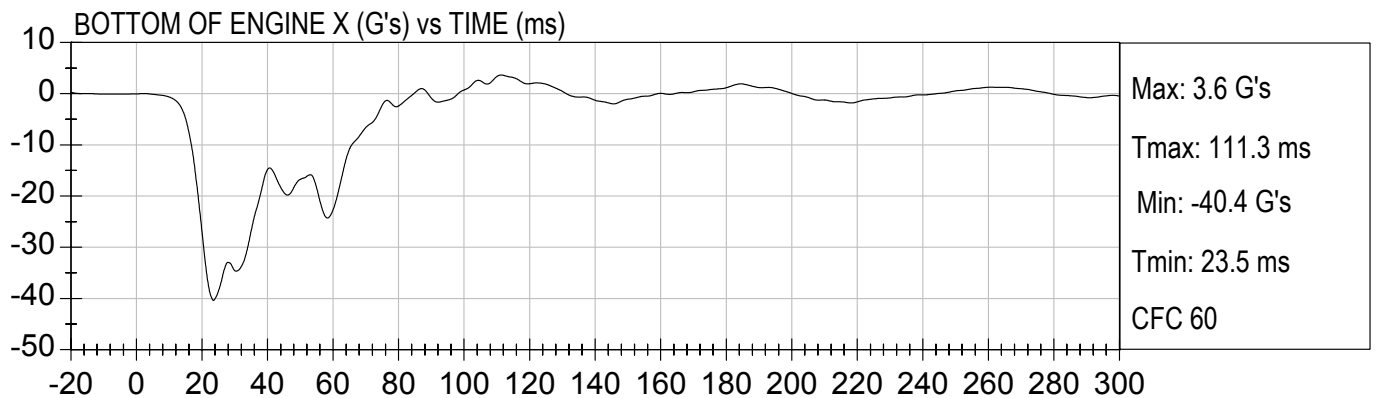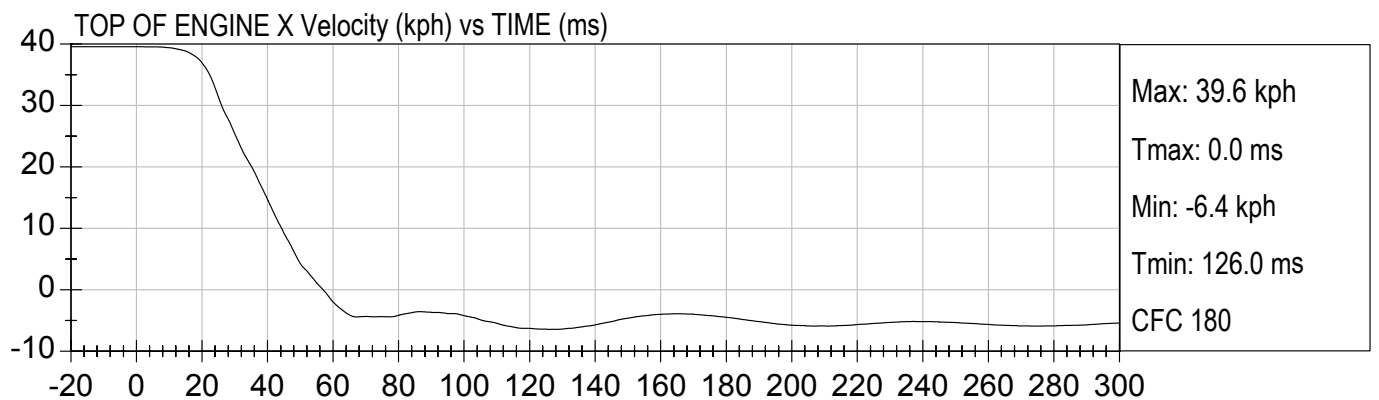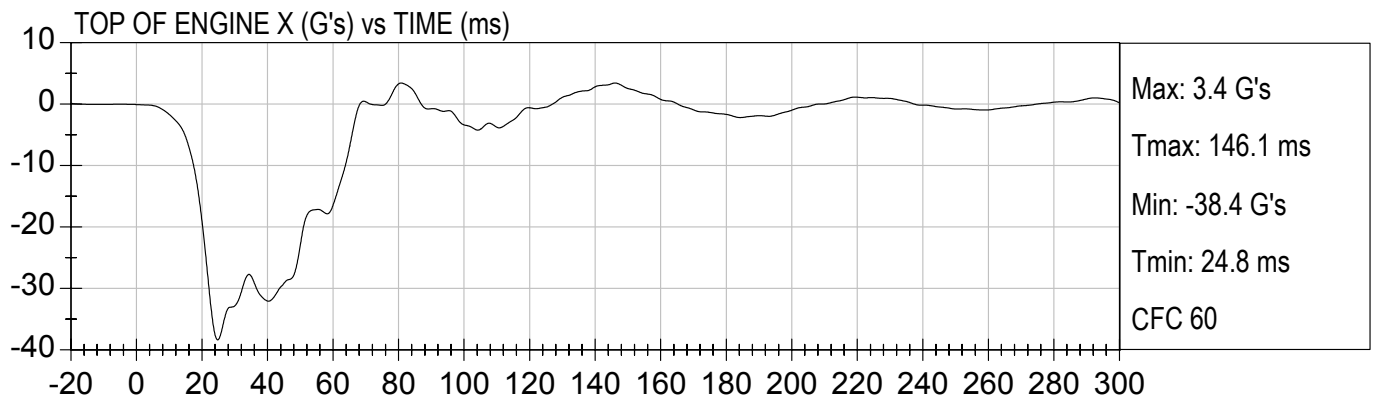



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO





Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

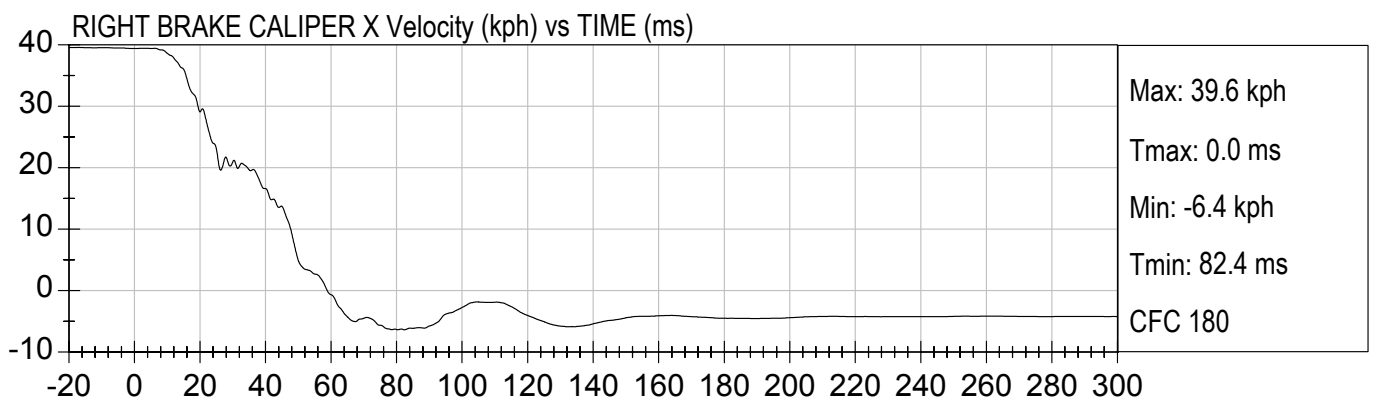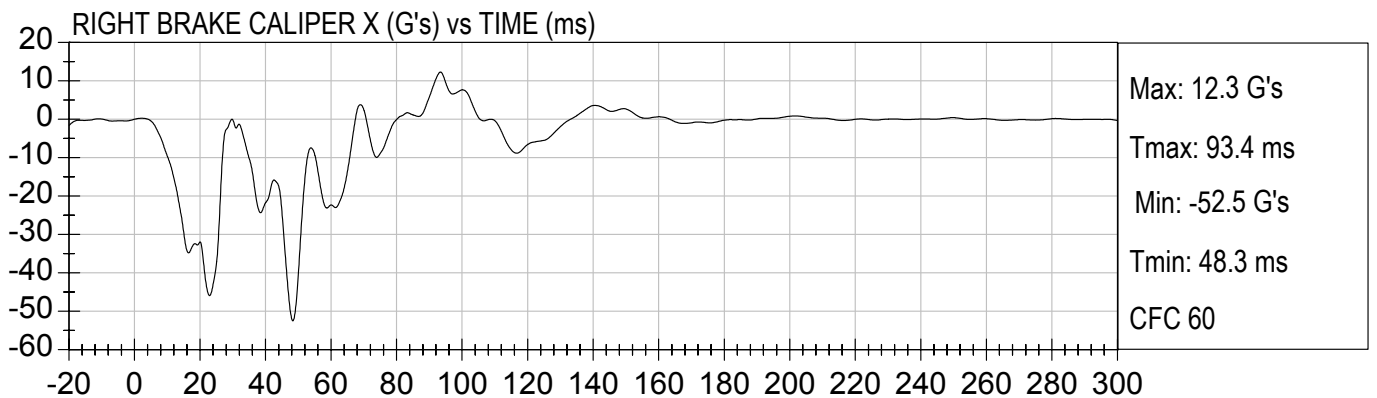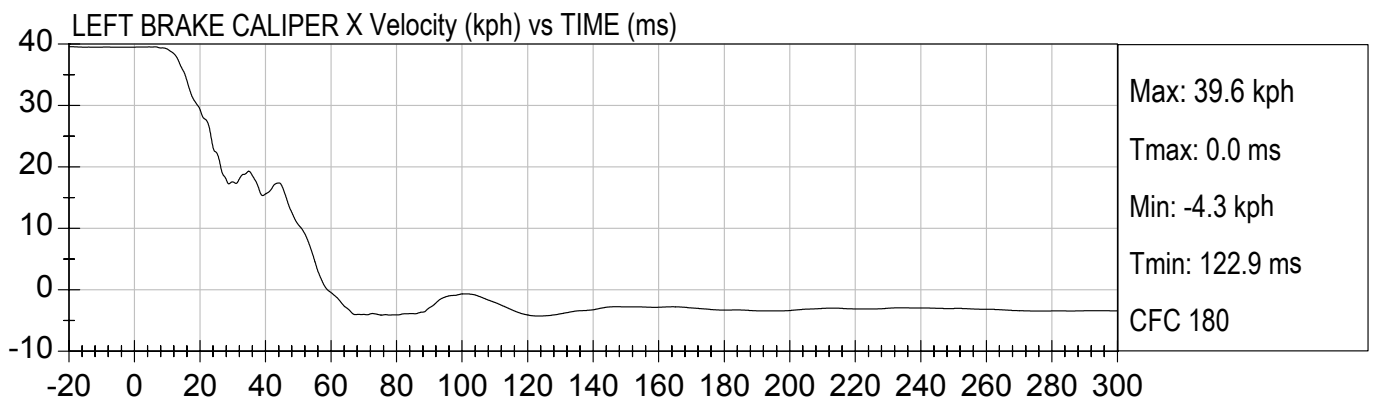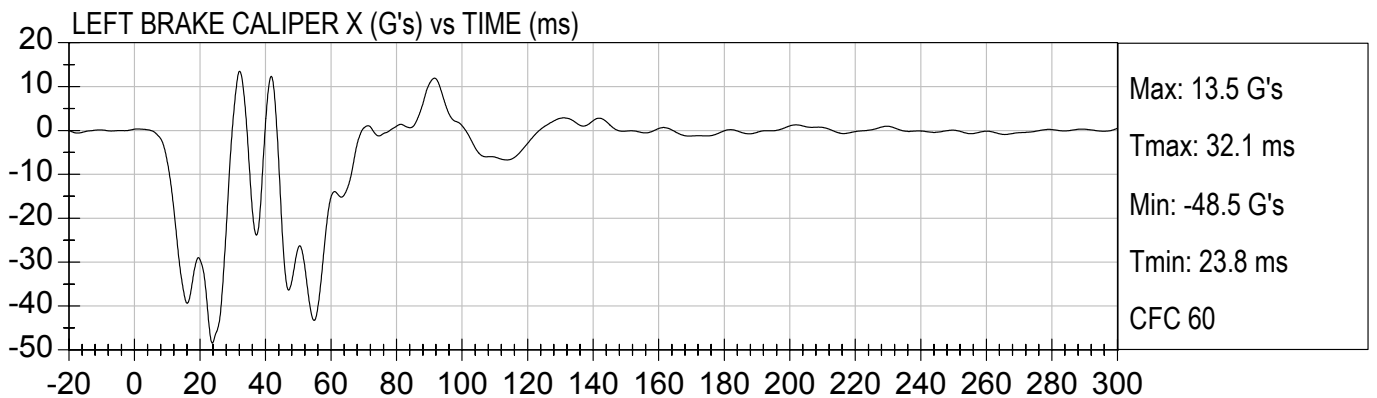



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO



Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

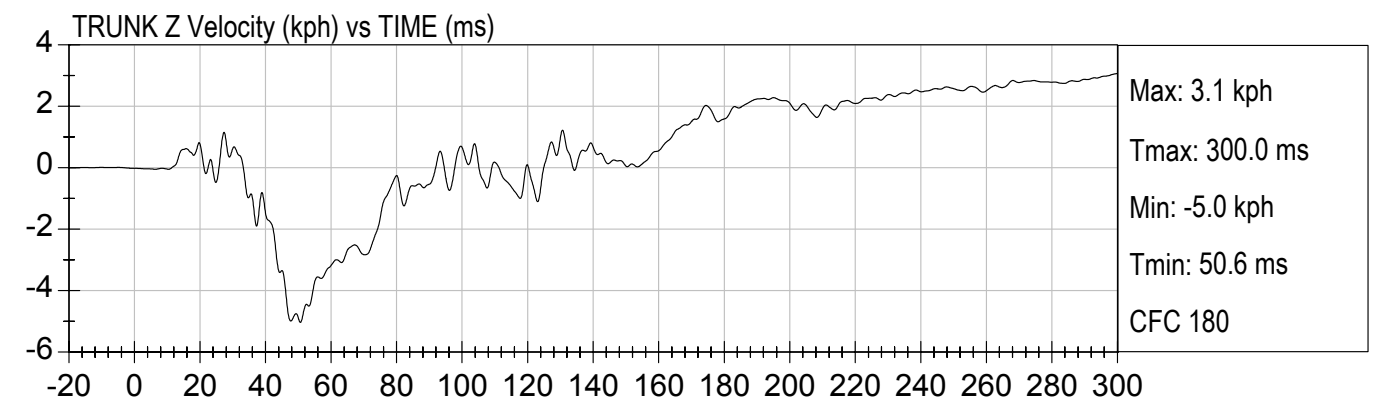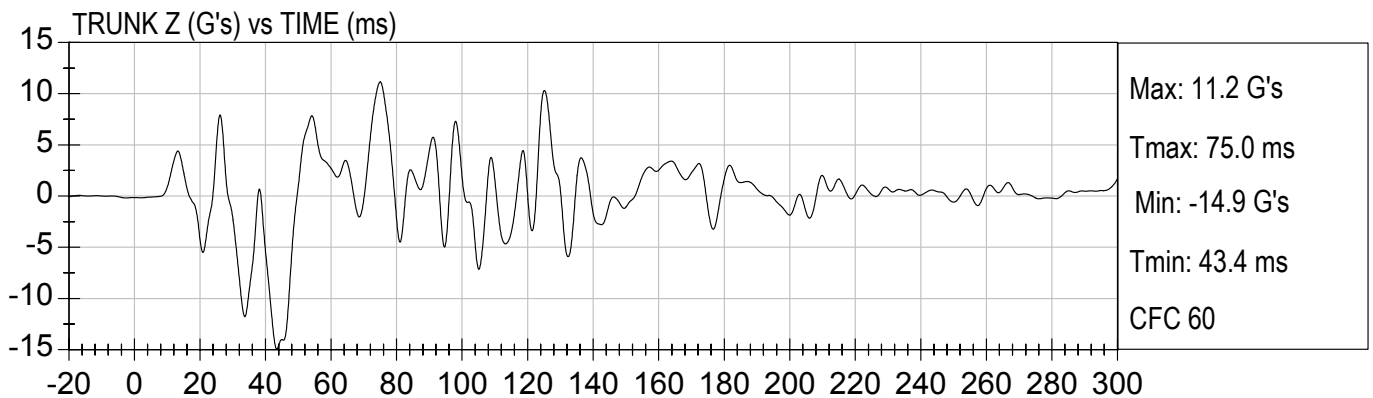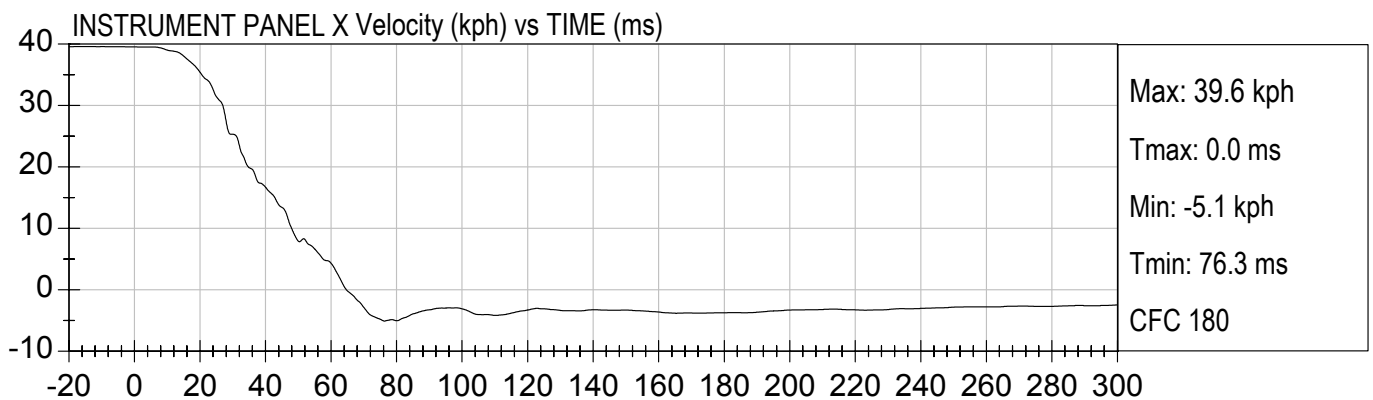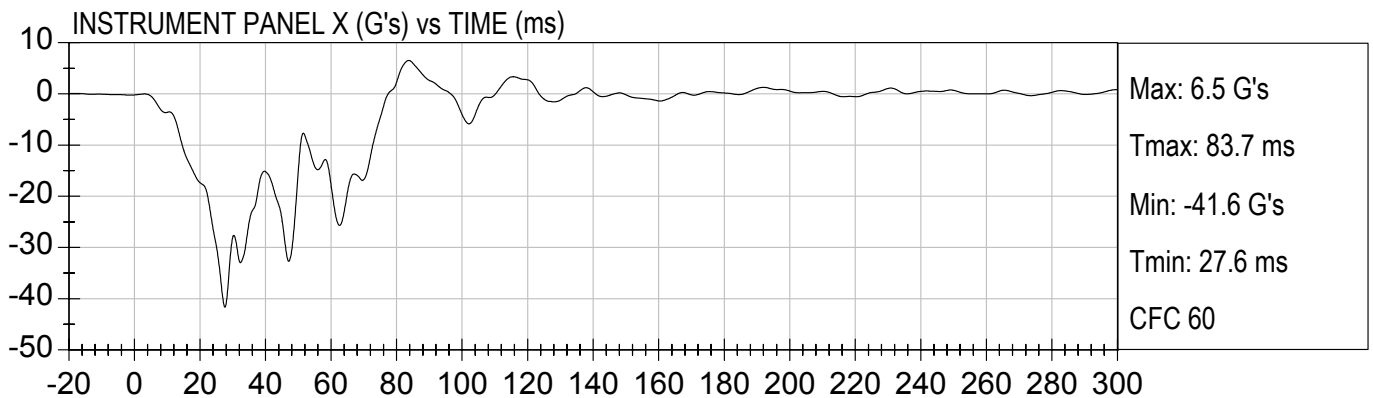



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO

Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

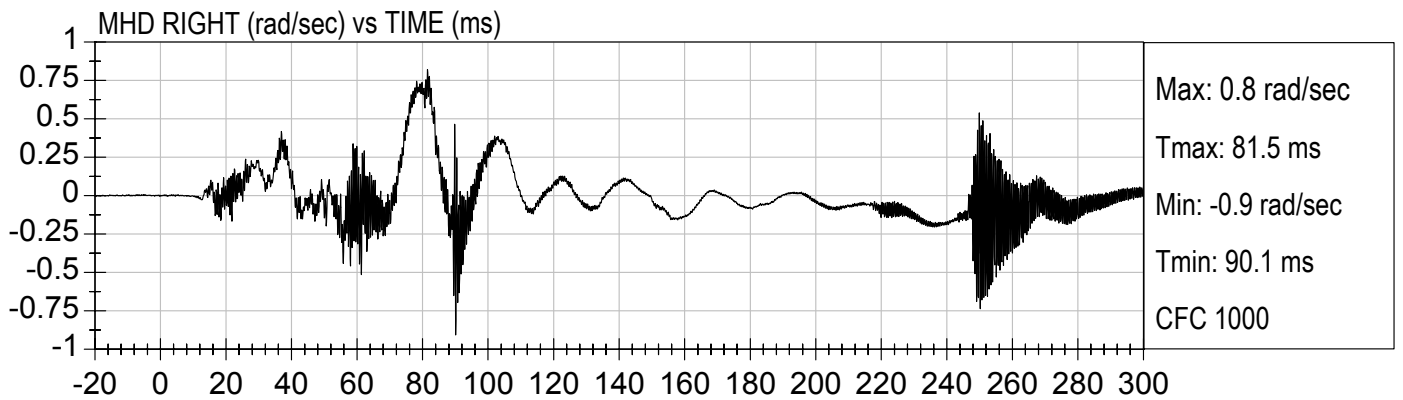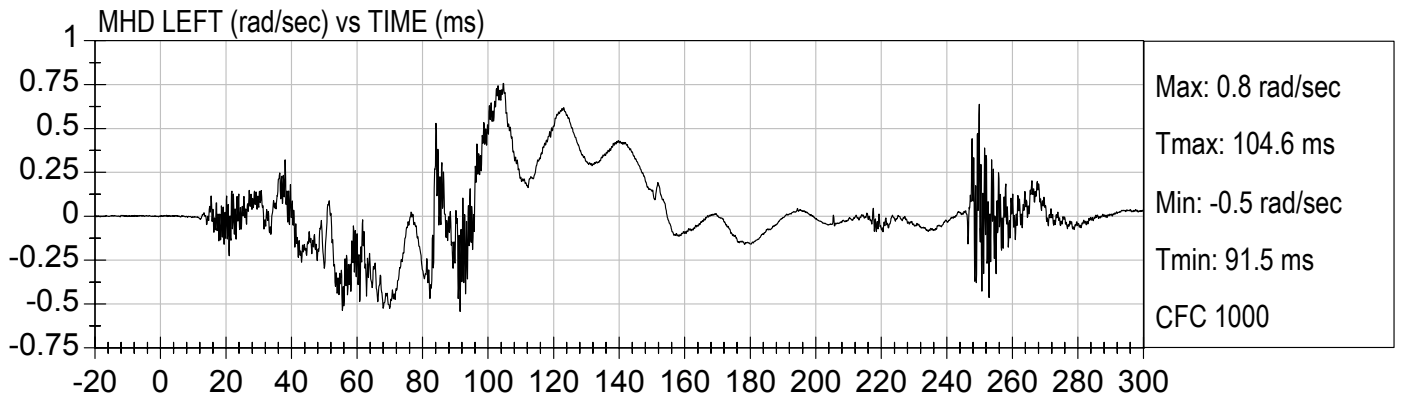





25MPH FRONTAL UNBELTED
2004 DODGE DURANGO

Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)


BARRIER FORCE - UPPER LEFT (kn) vs TIME (ms)

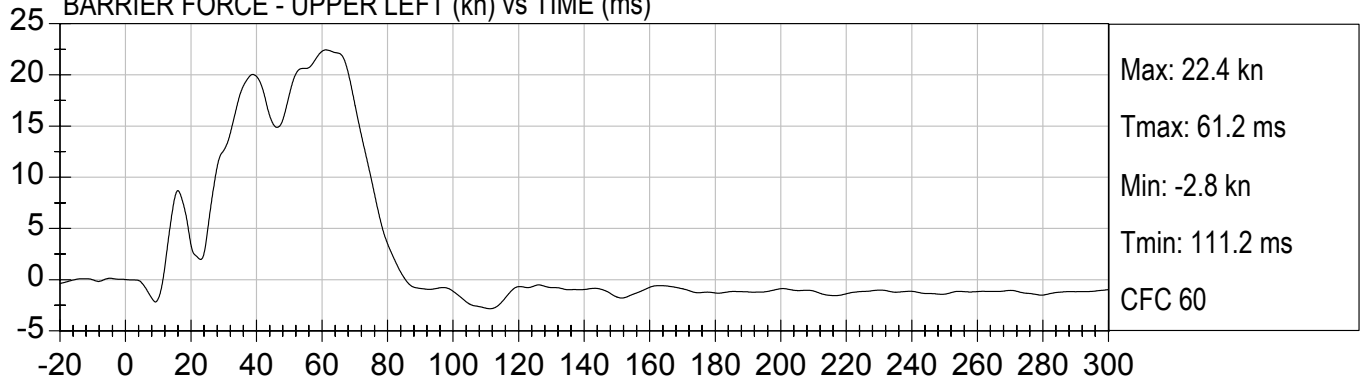

BARRIER FORCE - UPPER CENTER (kn) vs TIME (ms)

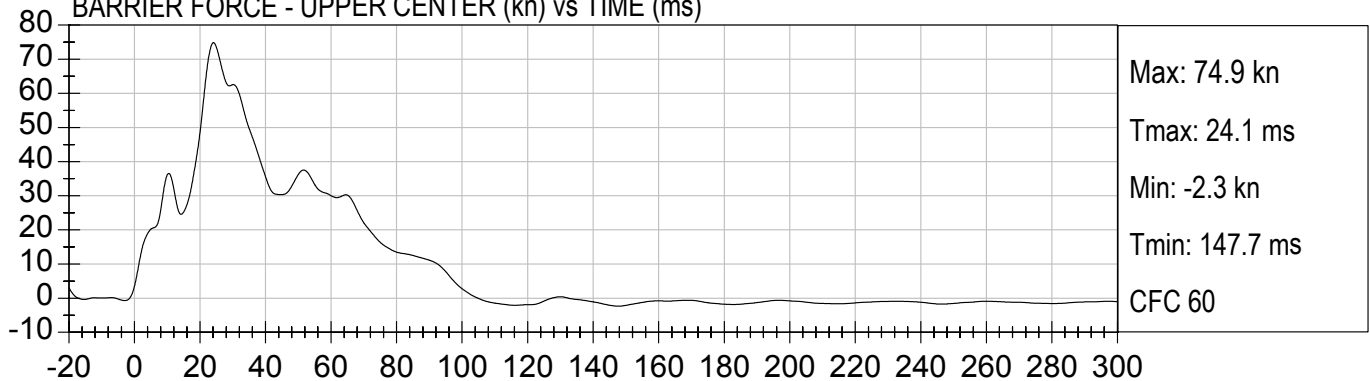

BARRIER FORCE - UPPER RIGHT (kn) vs TIME (ms)

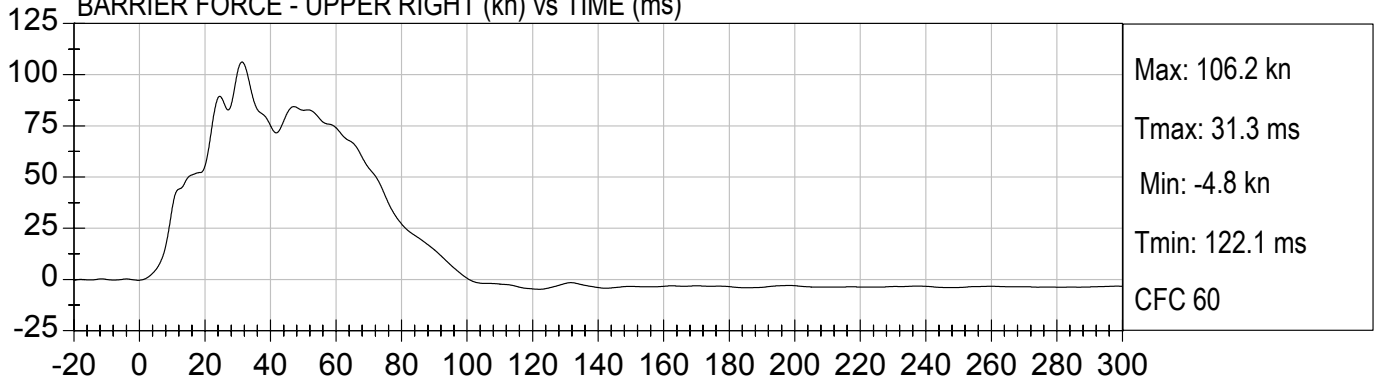





25MPH FRONTAL UNBELTED
2004 DODGE DURANGO

Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)


BARRIER FORCE - LOWER LEFT (kn) vs TIME (ms)

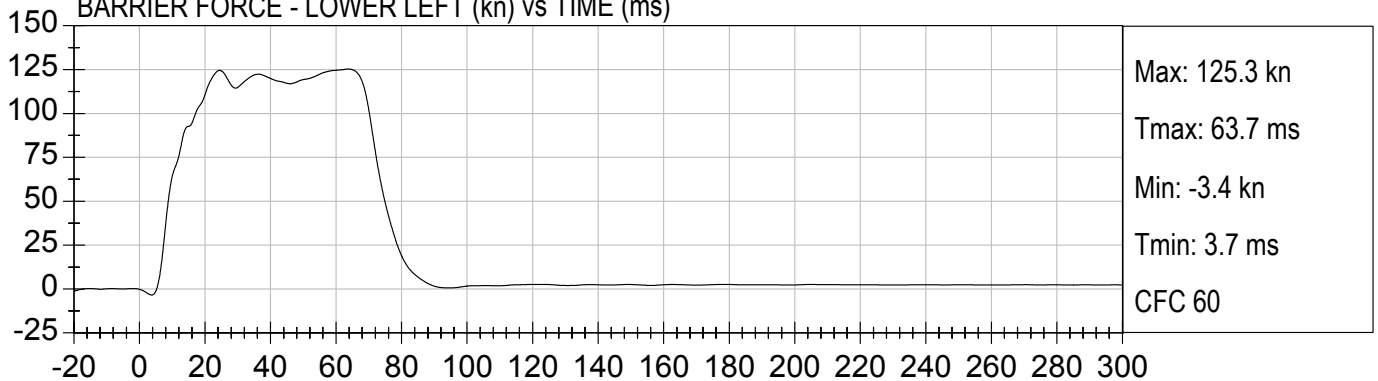

BARRIER FORCE - LOWER CENTER (kn) vs TIME (ms)

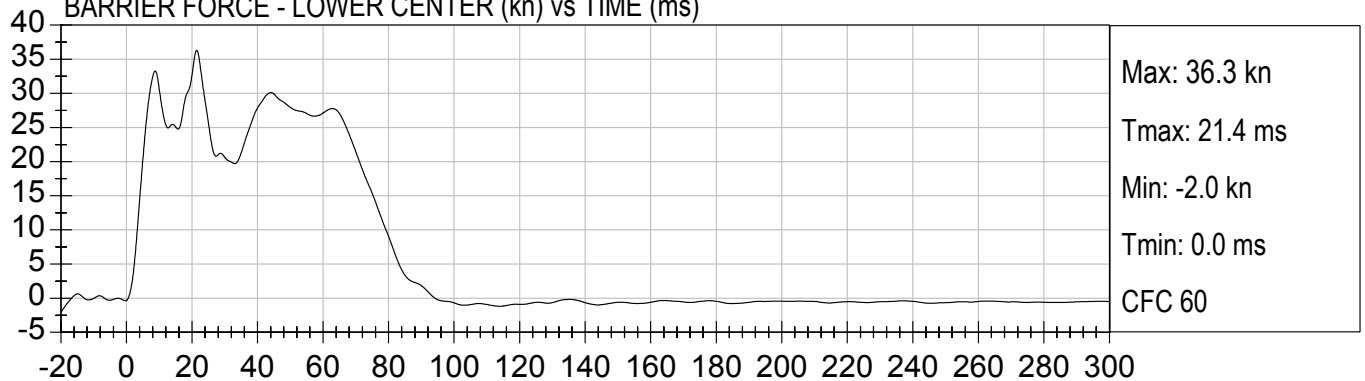

BARRIER FORCE - LOWER RIGHT (kn) vs TIME (ms)

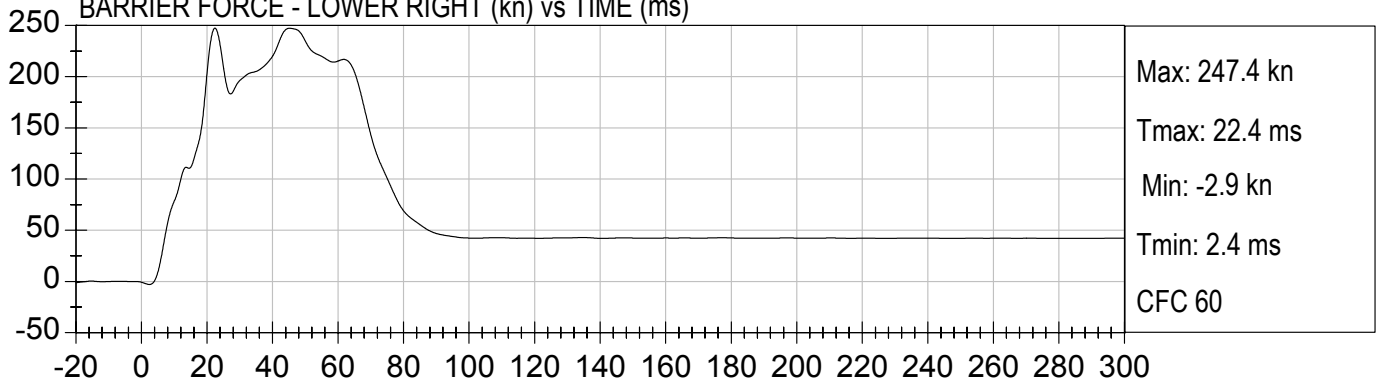





25MPH FRONTAL UNBELTED
2004 DODGE DURANGO

Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)


BARRIER FORCE - SUM LEFT (kn) vs TIME (ms)

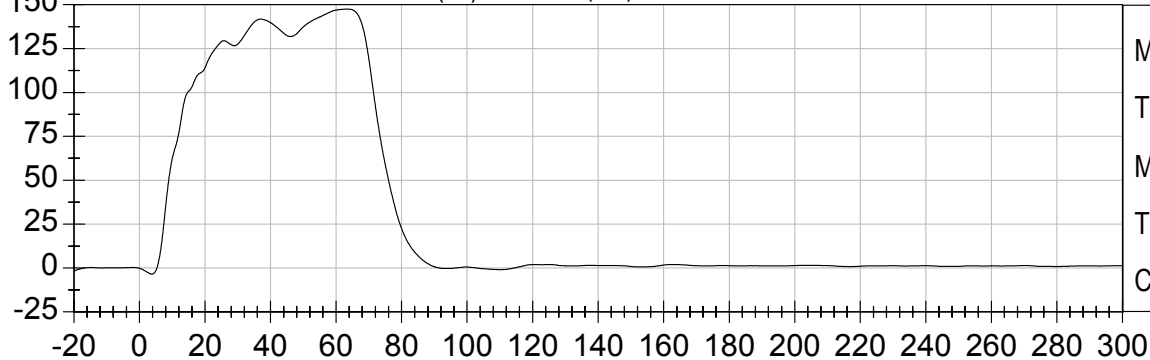


BARRIER FORCE - SUM CENTER (kn) vs TIME (ms)

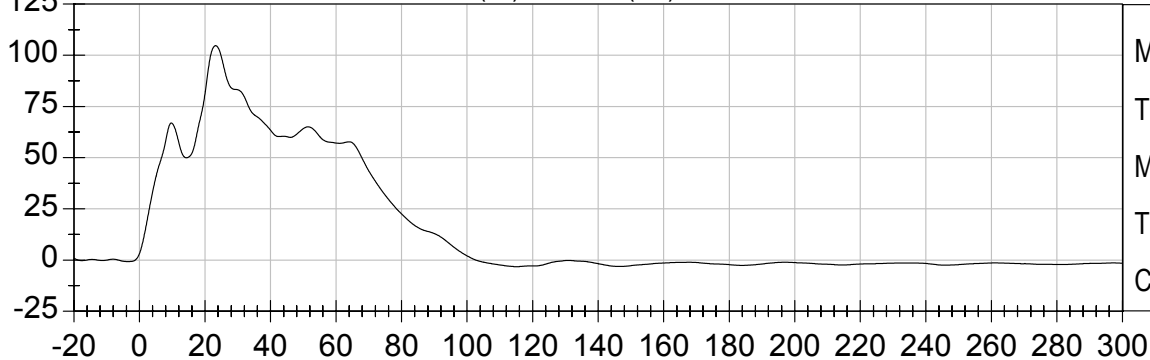

BARRIER FORCE - SUM RIGHT (kn) vs TIME (ms)

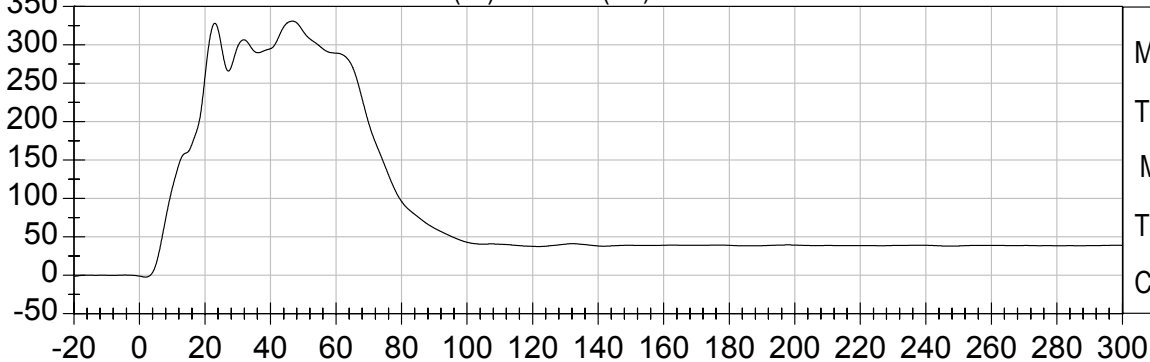


BARRIER FORCE - SUM ALL (kn) vs TIME (ms)

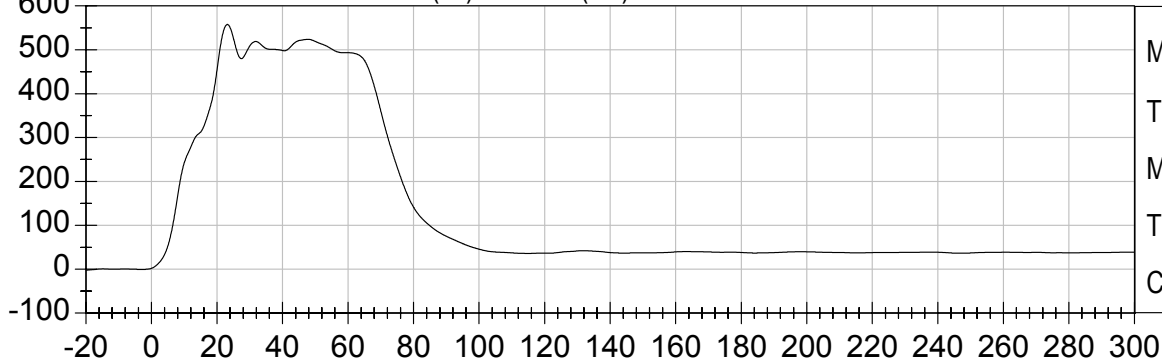



25MPH FRONTAL UNBELTED
2004 DODGE DURANGO

Test Date: 04/01/04
Speed: 24.6 mph (39.6 km/h)

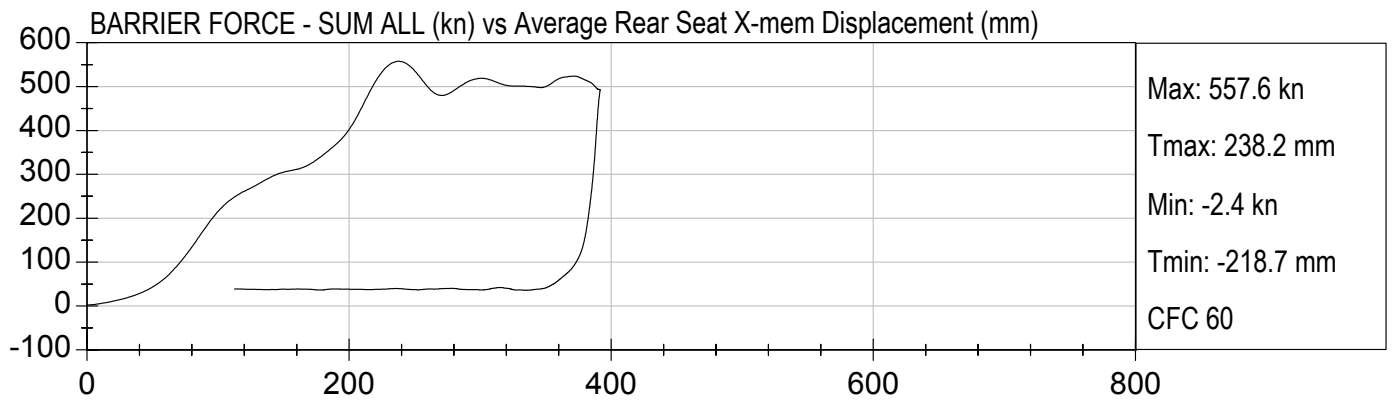

APPENDIX B
LOW RISK TEST DATA

TABLE OF DATA PLOTS

		<u>Page No.</u>
Figure No. 1.	5 th Fem. P1 Driver Head X Acceleration vs. Time	B-1
Figure No. 2.	5 th Fem. P1 Driver Head Y Acceleration vs. Time	B-1
Figure No. 3.	5 th Fem. P1 Driver Head Z Acceleration vs. Time	B-1
Figure No. 4.	5 th Fem. P1 Driver Head Resultant Acceleration vs. Time	B-1
Figure No. 5.	5 th Fem. P1 Driver Head X Velocity vs. Time	B-2
Figure No. 6.	5 th Fem. P1 Driver Head Y Velocity vs. Time	B-2
Figure No. 7.	5 th Fem. P1 Driver Head Z Velocity vs. Time	B-2
Figure No. 8.	5 th Fem. P1 Driver Neck Force X vs. Time	B-3
Figure No. 9.	5 th Fem. P1 Driver Neck Force Y vs. Time	B-3
Figure No. 10.	5 th Fem. P1 Driver Neck Force Z vs. Time	B-3
Figure No. 11.	5 th Fem. P1 Driver Neck Force Resultant vs. Time	B-3
Figure No. 12.	5 th Fem. P1 Driver Neck Moment X vs. Time	B-4
Figure No. 13.	5 th Fem. P1 Driver Neck Moment Y vs. Time	B-4
Figure No. 14.	5 th Fem. P1 Driver Neck Moment Z vs. Time	B-4
Figure No. 15.	5 th Fem. P1 Driver Neck Moment Resultant vs. Time	B-4
Figure No. 16.	5 th Fem. P1 Driver Chest X Acceleration vs. Time	B-5
Figure No. 17.	5 th Fem. P1 Driver Chest Y Acceleration vs. Time	B-5
Figure No. 18.	5 th Fem. P1 Driver Chest Z Acceleration vs. Time	B-5
Figure No. 19.	5 th Fem. P1 Driver Chest Resultant Acceleration vs. Time	B-5
Figure No. 20.	5 th Fem. P1 Driver Chest X Velocity vs. Time	B-6
Figure No. 21.	5 th Fem. P1 Driver Chest Y Velocity vs. Time	B-6
Figure No. 22.	5 th Fem. P1 Driver Chest Z Velocity vs. Time	B-6
Figure No. 23.	5 th Fem. P1 Driver Chest Displacement vs. Time	B-6
Figure No. 24.	5 th Fem. P1 Driver Left Femur Force vs. Time	B-7
Figure No. 25.	5 th Fem. P1 Driver Right Femur Force vs. Time	B-7
Figure No. 26.	Fire Voltage #1 Voltage vs. Time	B-8
Figure No. 27.	Fire Current #1 Voltage vs. Time	B-8
Figure No. 28.	Fire Voltage #2 Voltage vs. Time	B-8
Figure No. 29.	Fire Current #2 Voltage vs. Time	B-8

		<u>Page No.</u>
Figure No. 30.	5 th Fem. P1 Driver Nij (N_{TF}) vs. Time	B-9
Figure No. 31.	5 th Fem. P1 Driver Nij (N_{TE}) vs. Time	B-9
Figure No. 32.	5 th Fem. P1 Driver Nij (N_{CF}) vs. Time	B-9
Figure No. 33.	5 th Fem. P1 Driver Nij (N_{CE}) vs. Time	B-9
Figure No. 34.	5 th Fem. P2 Driver Head X Acceleration vs. Time	B-10
Figure No. 35.	5 th Fem. P2 Driver Head Y Acceleration vs. Time	B-10
Figure No. 36.	5 th Fem. P2 Driver Head Z Acceleration vs. Time	B-10
Figure No. 37.	5 th Fem. P2 Driver Head Resultant Acceleration vs. Time	B-10
Figure No. 38.	5 th Fem. P2 Driver Head X Velocity vs. Time	B-11
Figure No. 39.	5 th Fem. P2 Driver Head Y Velocity vs. Time	B-11
Figure No. 40.	5 th Fem. P2 Driver Head Z Velocity vs. Time	B-11
Figure No. 41.	5 th Fem. P2 Driver Neck Force X vs. Time	B-12
Figure No. 42.	5 th Fem. P2 Driver Neck Force Y vs. Time	B-12
Figure No. 43.	5 th Fem. P2 Driver Neck Force Z vs. Time	B-12
Figure No. 44.	5 th Fem. P2 Driver Neck Force Resultant vs. Time	B-12
Figure No. 45.	5 th Fem. P2 Driver Neck Moment X vs. Time	B-13
Figure No. 46.	5 th Fem. P2 Driver Neck Moment Y vs. Time	B-13
Figure No. 47.	5 th Fem. P2 Driver Neck Moment Z vs. Time	B-13
Figure No. 48.	5 th Fem. P2 Driver Neck Moment Resultant vs. Time	B-13
Figure No. 49.	5 th Fem. P2 Driver Chest X Acceleration vs. Time	B-14
Figure No. 50.	5 th Fem. P2 Driver Chest Y Acceleration vs. Time	B-14
Figure No. 51.	5 th Fem. P2 Driver Chest Z Acceleration vs. Time	B-14
Figure No. 52.	5 th Fem. P2 Driver Chest Resultant Acceleration vs. Time	B-14
Figure No. 53.	5 th Fem. P2 Driver Chest X Velocity vs. Time	B-15
Figure No. 54.	5 th Fem. P2 Driver Chest Y Velocity vs. Time	B-15
Figure No. 55.	5 th Fem. P2 Driver Chest Z Velocity vs. Time	B-15
Figure No. 56.	5 th Fem. P2 Driver Chest Displacement vs. Time	B-15
Figure No. 57.	5 th Fem. P2 Driver Left Femur Force vs. Time	B-16
Figure No. 58.	5 th Fem. P2 Driver Right Femur Force vs. Time	B-16
Figure No. 59.	Fire Voltage #1 Voltage vs. Time	B-17





	<u>Page No.</u>
Figure No. 60. Fire Current #1 Voltage vs. Time	B-17
Figure No. 61. Fire Voltage #2 Voltage vs. Time	B-17
Figure No. 62. Fire Current #2 Voltage vs. Time	B-17
Figure No. 63. 5 th Fem. P2 Driver Nij (N_{TF}) vs. Time	B-18
Figure No. 64. 5 th Fem. P2 Driver Nij (N_{TE}) vs. Time	B-18
Figure No. 65. 5 th Fem. P2 Driver Nij (N_{CF}) vs. Time	B-18
Figure No. 66. 5 th Fem. P2 Driver Nij (N_{CE}) vs. Time	B-18
Figure No. 67. 3 Year Old P1 Passenger Head X Acceleration vs. Time	B-19
Figure No. 68. 3 Year Old P1 Passenger Head Y Acceleration vs. Time	B-19
Figure No. 69. 3 Year Old P1 Passenger Head Z Acceleration vs. Time	B-19
Figure No. 70. 3 Year Old P1 Passenger Head Resultant Acceleration vs. Time	B-19
Figure No. 71. 3 Year Old P1 Passenger Head X Velocity vs. Time	B-20
Figure No. 72. 3 Year Old P1 Passenger Head Y Velocity vs. Time	B-20
Figure No. 73. 3 Year Old P1 Passenger Head Z Velocity vs. Time	B-20
Figure No. 74. 3 Year Old P1 Passenger Neck Force X vs. Time	B-21
Figure No. 75. 3 Year Old P1 Passenger Neck Force Y vs. Time	B-21
Figure No. 76. 3 Year Old P1 Passenger Neck Force Z vs. Time	B-21
Figure No. 77. 3 Year Old P1 Passenger Neck Force Resultant vs. Time	B-21
Figure No. 78. 3 Year Old P1 Passenger Neck Moment X vs. Time	B-22
Figure No. 79. 3 Year Old P1 Passenger Neck Moment Y vs. Time	B-22
Figure No. 80. 3 Year Old P1 Passenger Neck Moment Z vs. Time	B-22
Figure No. 81. 3 Year Old P1 Passenger Neck Moment Resultant vs. Time	B-22
Figure No. 82. 3 Year Old P1 Passenger Chest X Acceleration vs. Time	B-23
Figure No. 83. 3 Year Old P1 Passenger Chest Y Acceleration vs. Time	B-23
Figure No. 84. 3 Year Old P1 Passenger Chest Z Acceleration vs. Time	B-23
Figure No. 85. 3 Year Old P1 Passenger Chest Resultant Acceleration vs. Time	B-23
Figure No. 86. 3 Year Old P1 Passenger Chest X Velocity vs. Time	B-24
Figure No. 87. 3 Year Old P1 Passenger Chest Y Velocity vs. Time	B-24
Figure No. 88. 3 Year Old P1 Passenger Chest Z Velocity vs. Time	B-24
Figure No. 89. 3 Year Old P1 Passenger Chest Displacement vs. Time	B-24




		<u>Page No.</u>
Figure No. 90.	Fire Voltage #1 Voltage vs. Time	B-25
Figure No. 91.	Fire Current #1 Voltage vs. Time	B-25
Figure No. 92.	Fire Voltage #2 Voltage vs. Time	B-25
Figure No. 93.	Fire Current #2 Voltage vs. Time	B-25
Figure No. 94.	3 Year Old P1 Passenger Nij (N_{TF}) vs. Time	B-26
Figure No. 95.	3 Year Old P1 Passenger Nij (N_{TE}) vs. Time	B-26
Figure No. 96.	3 Year Old P1 Passenger Nij (N_{CF}) vs. Time	B-26
Figure No. 97.	3 Year Old P1 Passenger Nij (N_{CE}) vs. Time	B-26
Figure No. 98.	3 Year Old P2 Passenger Head X Acceleration vs. Time	B-27
Figure No. 99.	3 Year Old P2 Passenger Head Y Acceleration vs. Time	B-27
Figure No. 100.	3 Year Old P2 Passenger Head Z Acceleration vs. Time	B-27
Figure No. 101.	3 Year Old P2 Passenger Head Resultant Acceleration vs. Time	B-27
Figure No. 102.	3 Year Old P2 Passenger Head X Velocity vs. Time	B-28
Figure No. 103.	3 Year Old P2 Passenger Head Y Velocity vs. Time	B-28
Figure No. 104.	3 Year Old P2 Passenger Head Z Velocity vs. Time	B-28
Figure No. 105.	3 Year Old P2 Passenger Neck Force X vs. Time	B-29
Figure No. 106.	3 Year Old P2 Passenger Neck Force Y vs. Time	B-29
Figure No. 107.	3 Year Old P2 Passenger Neck Force Z vs. Time	B-29
Figure No. 108.	3 Year Old P2 Passenger Neck Force Resultant vs. Time	B-29
Figure No. 109.	3 Year Old P2 Passenger Neck Moment X vs. Time	B-30
Figure No. 110.	3 Year Old P2 Passenger Neck Moment Y vs. Time	B-30
Figure No. 111.	3 Year Old P2 Passenger Neck Moment Z vs. Time	B-30
Figure No. 112.	3 Year Old P2 Passenger Neck Moment Resultant vs. Time	B-30
Figure No. 113.	3 Year Old P2 Passenger Chest X Acceleration vs. Time	B-31
Figure No. 114.	3 Year Old P2 Passenger Chest Y Acceleration vs. Time	B-31
Figure No. 115.	3 Year Old P2 Passenger Chest Z Acceleration vs. Time	B-31
Figure No. 116.	3 Year Old P2 Passenger Chest Resultant Acceleration vs. Time	B-31
Figure No. 117.	3 Year Old P2 Passenger Chest X Velocity vs. Time	B-32
Figure No. 118.	3 Year Old P2 Passenger Chest Y Velocity vs. Time	B-32
Figure No. 119.	3 Year Old P2 Passenger Chest Z Velocity vs. Time	B-32

		<u>Page No.</u>
Figure No. 120.	3 Year Old P2 Passenger Chest Displacement vs. Time	B-32
Figure No. 121.	Fire Voltage #1 Voltage vs. Time	B-33
Figure No. 122.	Fire Current #1 Voltage vs. Time	B-33
Figure No. 123.	Fire Voltage #2 Voltage vs. Time	B-33
Figure No. 124.	Fire Current #2 Voltage vs. Time	B-33
Figure No. 125.	3 Year Old P1 Passenger Nij (N_{TF}) vs. Time	B-34
Figure No. 126.	3 Year Old P2 Passenger Nij (N_{TE}) vs. Time	B-34
Figure No. 127.	3 Year Old P2 Passenger Nij (N_{CF}) vs. Time	B-34
Figure No. 128.	3 Year Old P2 Passenger Nij (N_{CE}) vs. Time	B-34
Figure No. 129.	6 Year Old P2 Passenger Head X Acceleration vs. Time	B-35
Figure No. 130.	6 Year Old P1 Passenger Head Y Acceleration vs. Time	B-35
Figure No. 131.	6 Year Old P1 Passenger Head Z Acceleration vs. Time	B-35
Figure No. 132.	6 Year Old P1 Passenger Resultant Acceleration vs. Time	B-35
Figure No. 133.	6 Year Old P1 Passenger Head X Velocity vs. Time	B-36
Figure No. 134.	6 Year Old P1 Passenger Head Y Velocity vs. Time	B-36
Figure No. 135.	6 Year Old P1 Passenger Head Z Velocity vs. Time	B-36
Figure No. 136.	6 Year Old P1 Passenger Neck Force X vs. Time	B-37
Figure No. 137.	6 Year Old P1 Passenger Neck Force Y vs. Time	B-37
Figure No. 138.	6 Year Old P1 Passenger Neck Force Z vs. Time	B-37
Figure No. 139.	6 Year Old P1 Passenger Neck Force Resultant vs. Time	B-37
Figure No. 140.	6 Year Old P1 Passenger Neck Moment X vs. Time	B-38
Figure No. 141.	6 Year Old P1 Passenger Neck Moment Y vs. Time	B-38
Figure No. 142.	6 Year Old P1 Passenger Neck Moment Z vs. Time	B-38
Figure No. 143.	6 Year Old P1 Passenger Occipital Condyle Moment vs. Time	B-38
Figure No. 144.	6 Year Old P1 Passenger Chest X Acceleration vs. Time	B-39
Figure No. 145.	6 Year Old P1 Passenger Chest Y Acceleration vs. Time	B-39
Figure No. 146.	6 Year Old P1 Passenger Chest Z Acceleration vs. Time	B-39
Figure No. 147.	6 Year Old P1 Passenger Chest Resultant Acceleration vs. Time	B-39
Figure No. 148.	6 Year Old P1 Passenger Chest X Velocity vs. Time	B-40
Figure No. 149.	6 Year Old P1 Passenger Chest Y Velocity vs. Time	B-40

Figure No. 150.	6 Year Old P1 Passenger Chest Z Velocity vs. Time	B-40
Figure No. 151.	6 Year Old P1 Passenger Chest Displacement vs. Time	B-40
Figure No. 152.	Fire Voltage #1 Voltage vs. Time	B-41
Figure No. 153.	Fire Current #1 Voltage vs. Time	B-41
Figure No. 154.	Fire Voltage #2 Voltage vs. Time	B-41
Figure No. 155.	Fire Current #2 Voltage vs. Time	B-41
Figure No. 156.	6 Year Old P1 Passenger Nij (N_{TF}) vs. Time	B-42
Figure No. 157.	6 Year Old P1 Passenger Nij (N_{TE}) vs. Time	B-42
Figure No. 158.	6 Year Old P1 Passenger Nij (N_{CF}) vs. Time	B-42
Figure No. 159.	6 Year Old P1 Passenger Nij (N_{CE}) vs. Time	B-42
Figure No. 160.	6 Year Old P2 Passenger Head X Acceleration vs. Time	B-43
Figure No. 161.	6 Year Old P2 Passenger Head Y Acceleration vs. Time	B-43
Figure No. 162.	6 Year Old P2 Passenger Head Z Acceleration vs. Time	B-43
Figure No. 163.	6 Year Old P2 Passenger Head Resultant Acceleration vs. Time	B-43
Figure No. 164.	6 Year Old P2 Passenger Head X Velocity vs. Time	B-44
Figure No. 165.	6 Year Old P2 Passenger Head Y Velocity vs. Time	B-44
Figure No. 166.	6 Year Old P2 Passenger Head Z Velocity vs. Time	B-44
Figure No. 167.	6 Year Old P2 Passenger Neck Force X vs. Time	B-45
Figure No. 168.	6 Year Old P2 Passenger Neck Force Y vs. Time	B-45
Figure No. 169.	6 Year Old P2 Passenger Neck Force Z vs. Time	B-45
Figure No. 170.	6 Year Old P2 Passenger Neck Force Resultant vs. Time	B-45
Figure No. 171.	6 Year Old P2 Passenger Neck Moment X vs. Time	B-46
Figure No. 172.	6 Year Old P2 Passenger Neck Moment Y vs. Time	B-46
Figure No. 173.	6 Year Old P2 Passenger Neck Moment Z vs. Time	B-46
Figure No. 174.	6 Year Old P2 Passenger Occipital Condyle Moment vs. Time	B-46
Figure No. 175.	6 Year Old P2 Passenger Chest X Acceleration vs. Time	B-47
Figure No. 176.	6 Year Old P2 Passenger Chest Y Acceleration vs. Time	B-47
Figure No. 177.	6 Year Old P2 Passenger Chest Z Acceleration vs. Time	B-47
Figure No. 178.	6 Year Old P2 Passenger Chest Resultant Acceleration vs. Time	B-47
Figure No. 179.	6 Year Old P2 Passenger Chest X Velocity vs. Time	B-48


		<u>Page No.</u>
Figure No. 180.	6 Year Old P2 Passenger Chest Y Velocity vs. Time	B-48
Figure No. 181.	6 Year Old P2 Passenger Chest Z Velocity vs. Time	B-48
Figure No. 182.	6 Year Old P2 Passenger Chest Displacement vs. Time	B-48
Figure No. 183.	Fire Voltage #1 Voltage vs. Time	B-49
Figure No. 184.	Fire Current #1 Voltage vs. Time	B-49
Figure No. 185.	Fire Voltage #2 Voltage vs. Time	B-49
Figure No. 186.	Fire Current #2 Voltage vs. Time	B-49
Figure No. 187.	6 Year Old P2 Passenger Nij (N_{TF}) vs. Time	B-50
Figure No. 188.	6 Year Old P2 Passenger Nij (N_{TE}) vs. Time	B-50
Figure No. 189.	6 Year Old P2 Passenger Nij (N_{CF}) vs. Time	B-50
Figure No. 190.	6 Year Old P2 Passenger Nij (N_{CE}) vs. Time	B-50

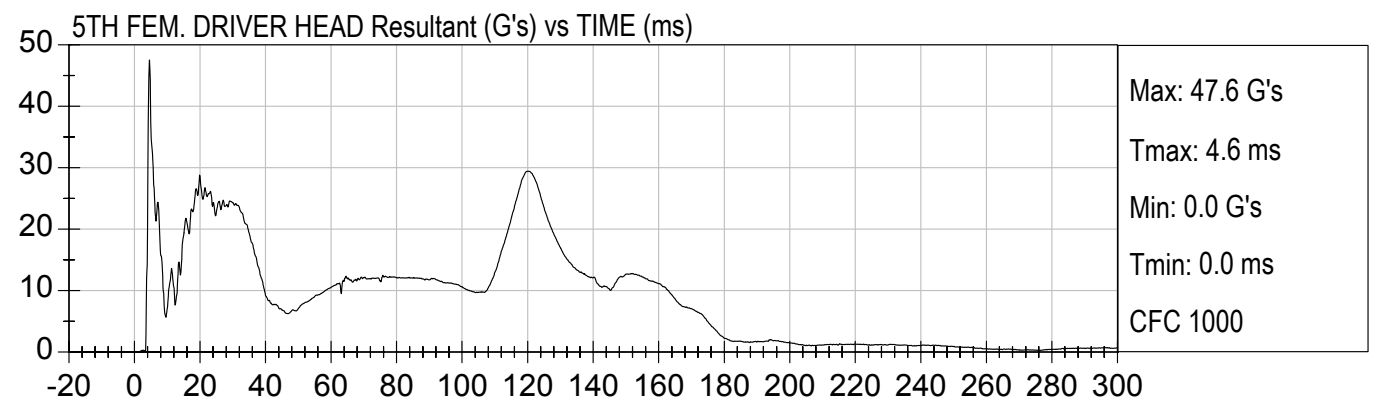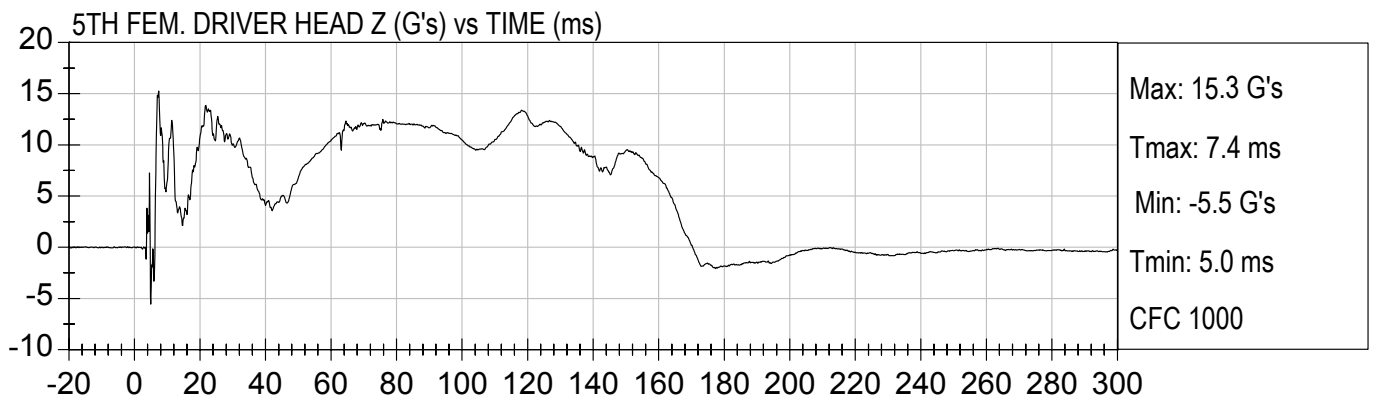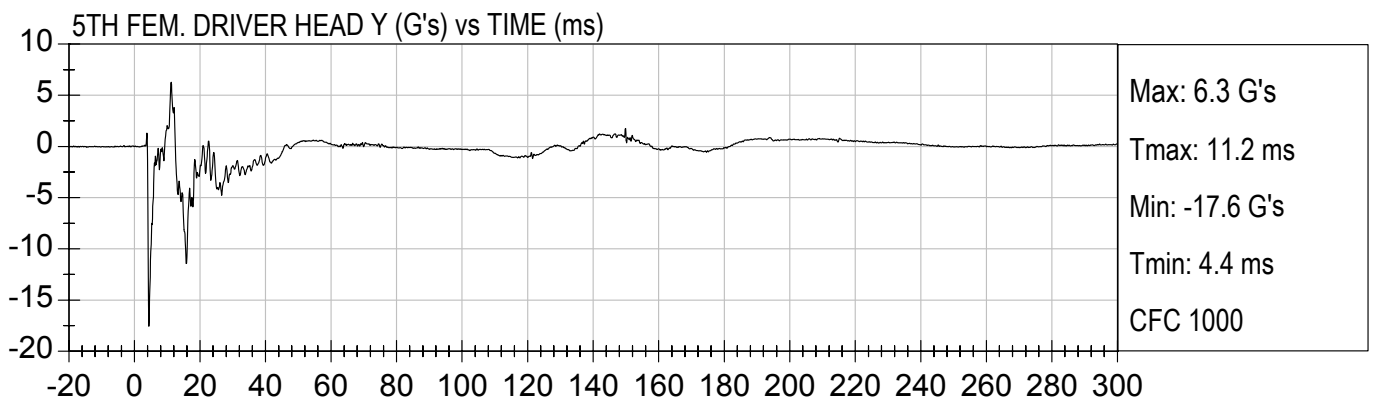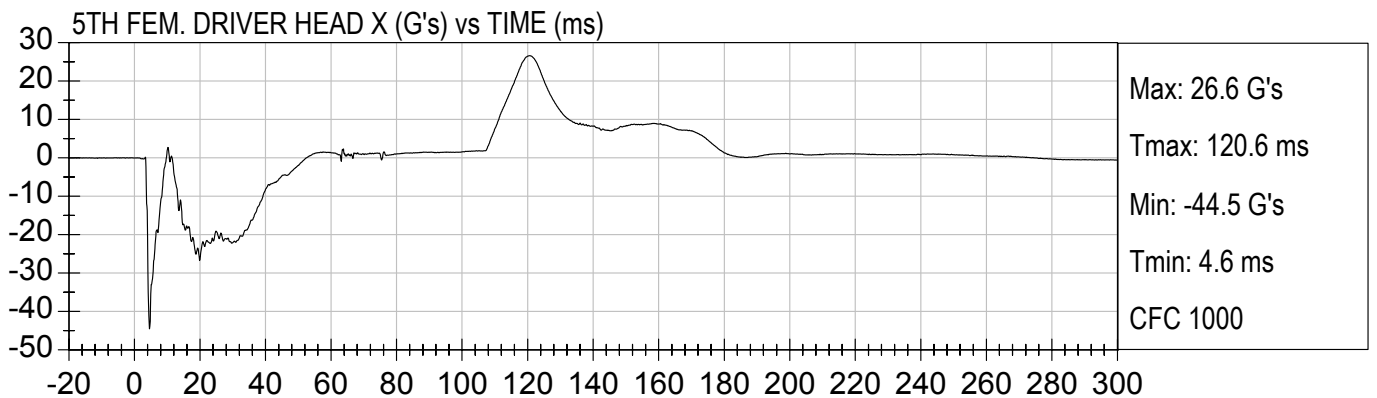

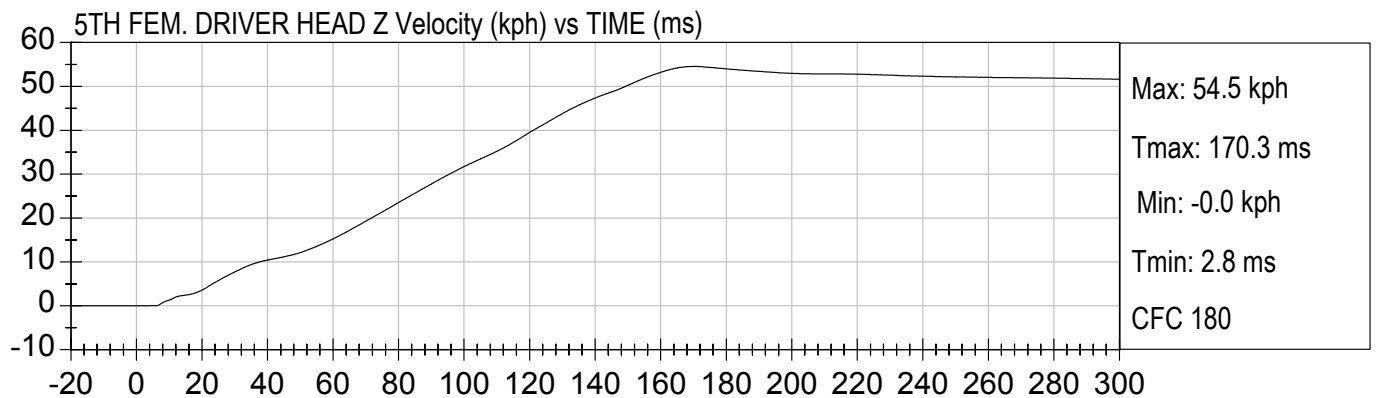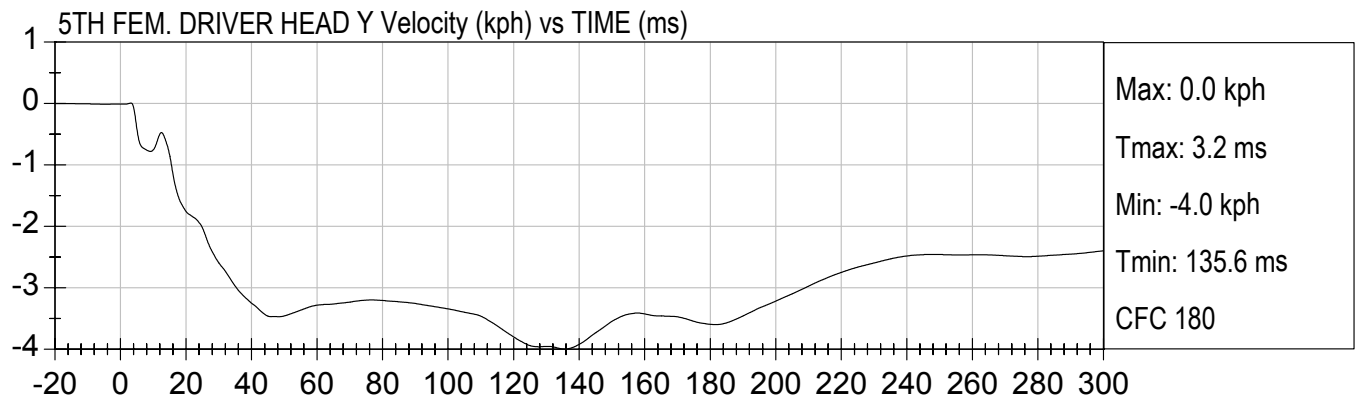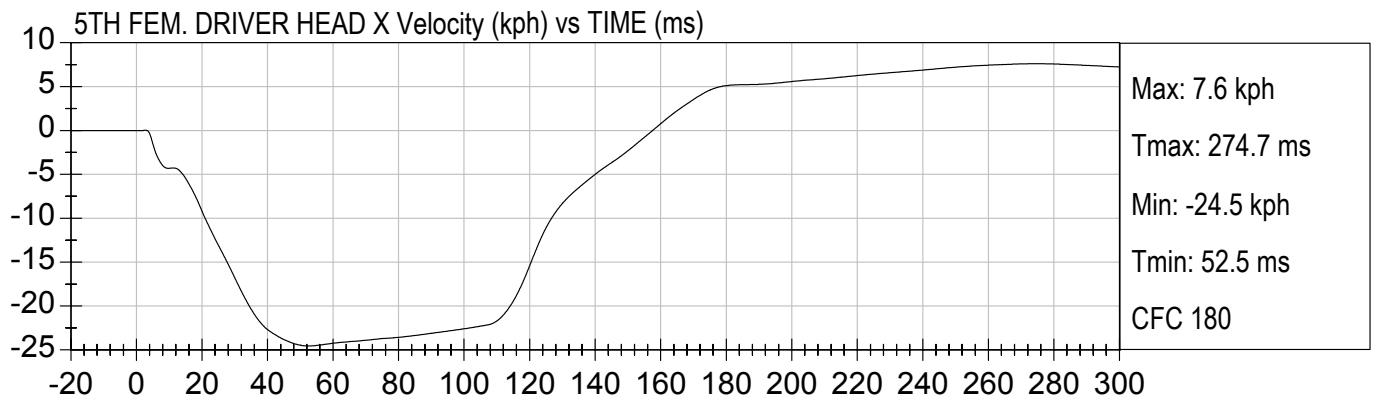





5TH FEM. DRIVER NECK FX (N) vs TIME (ms)

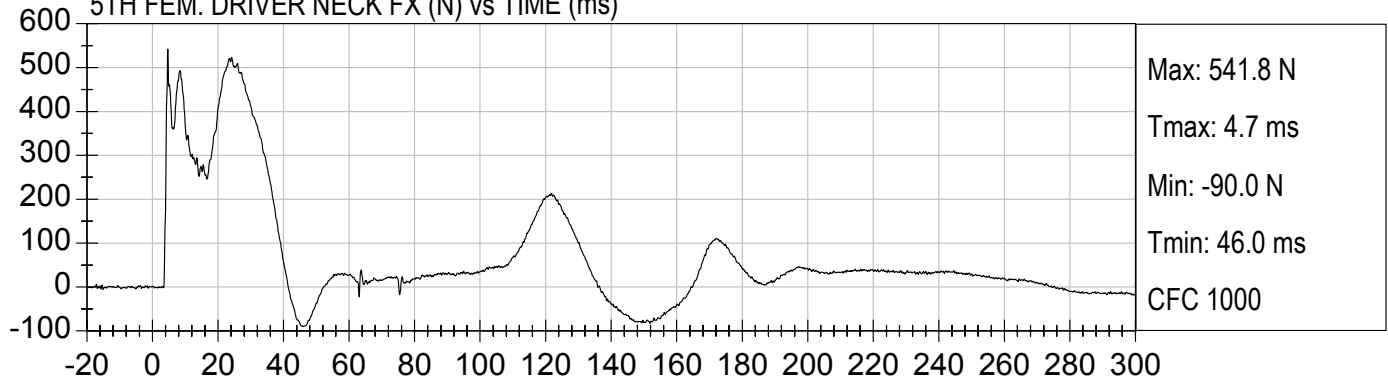


5TH FEM. DRIVER NECK FY (N) vs TIME (ms)




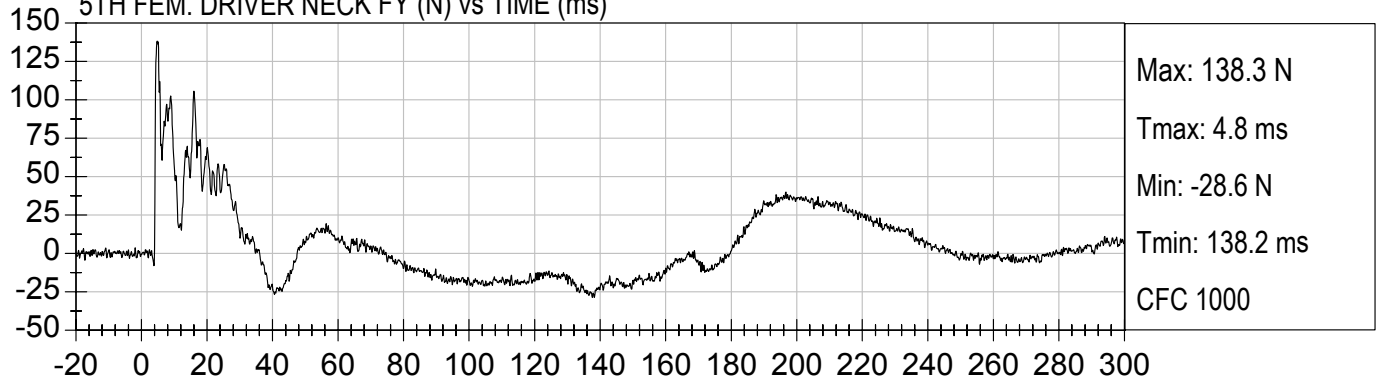






5TH FEM. DRIVER NECK FZ (N) vs TIME (ms)

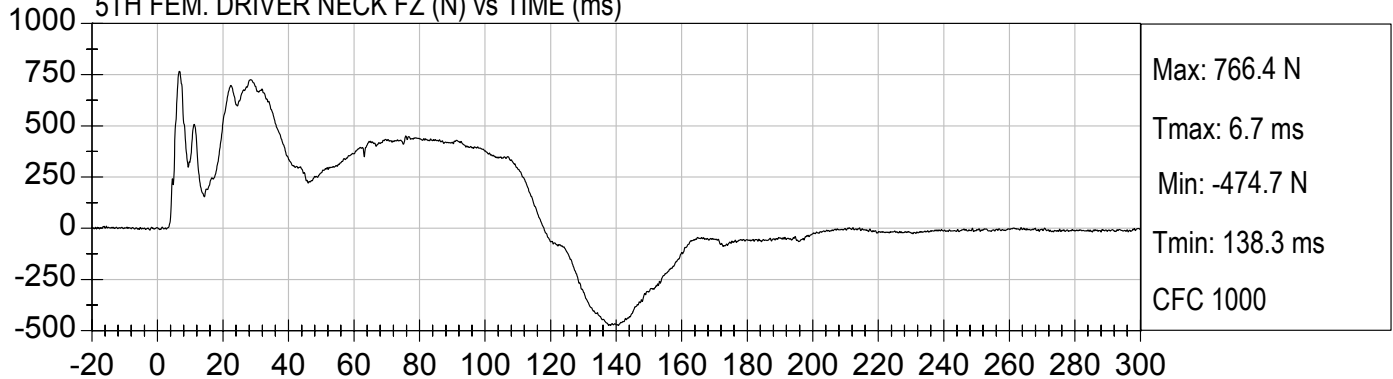

5TH FEM. DRIVER NECK FResultant (N) vs TIME (ms)

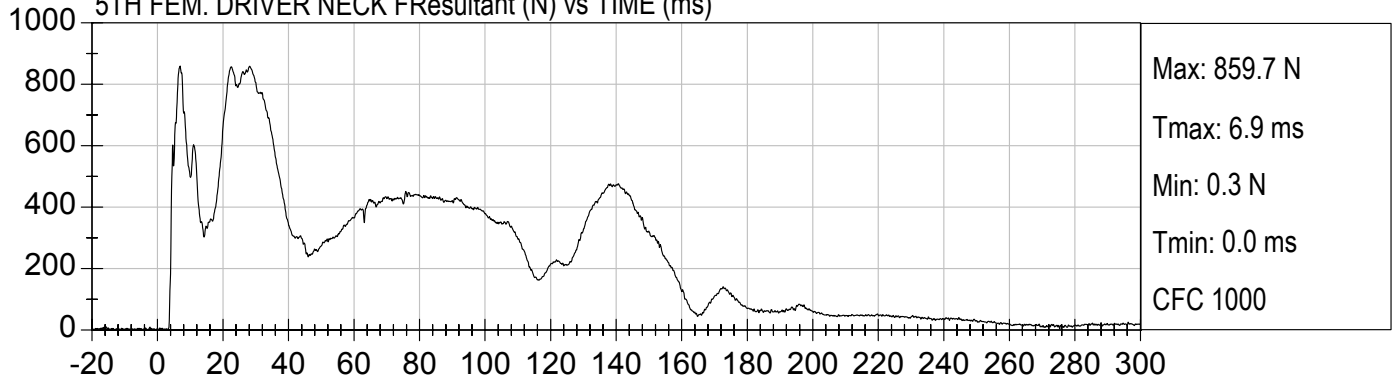


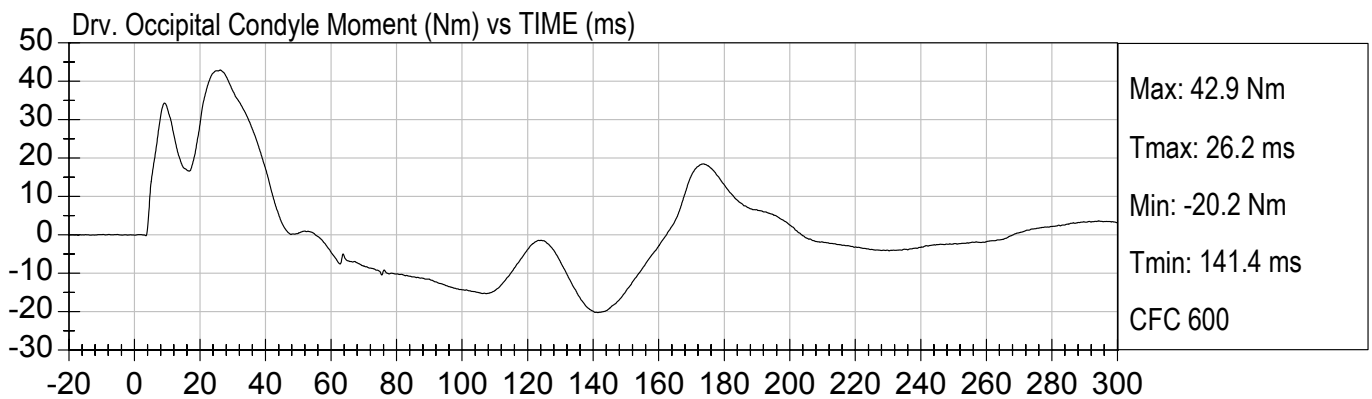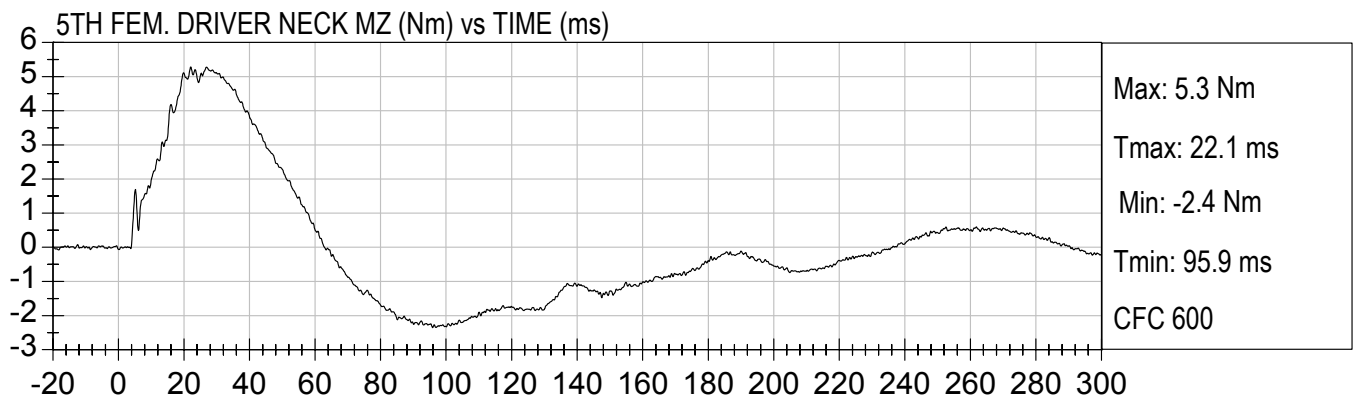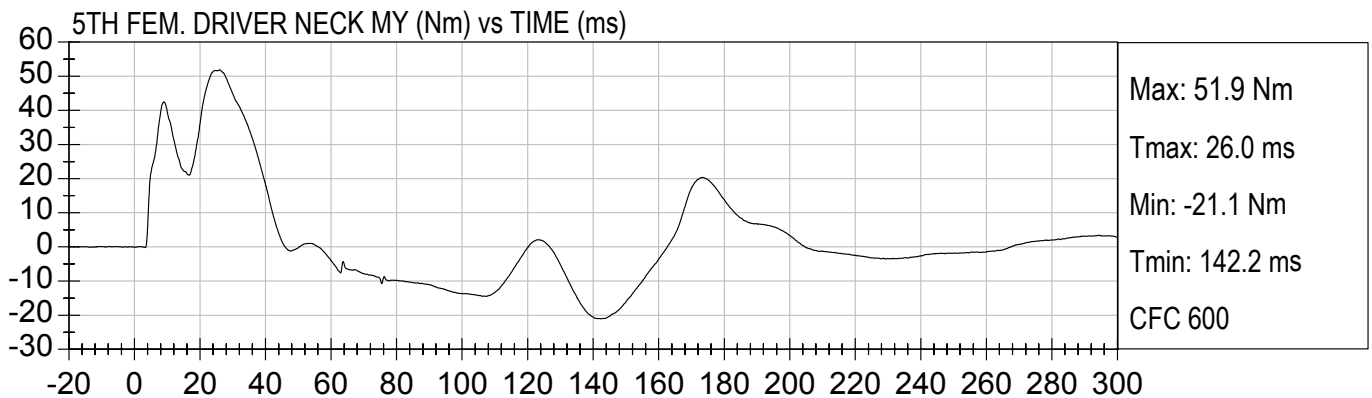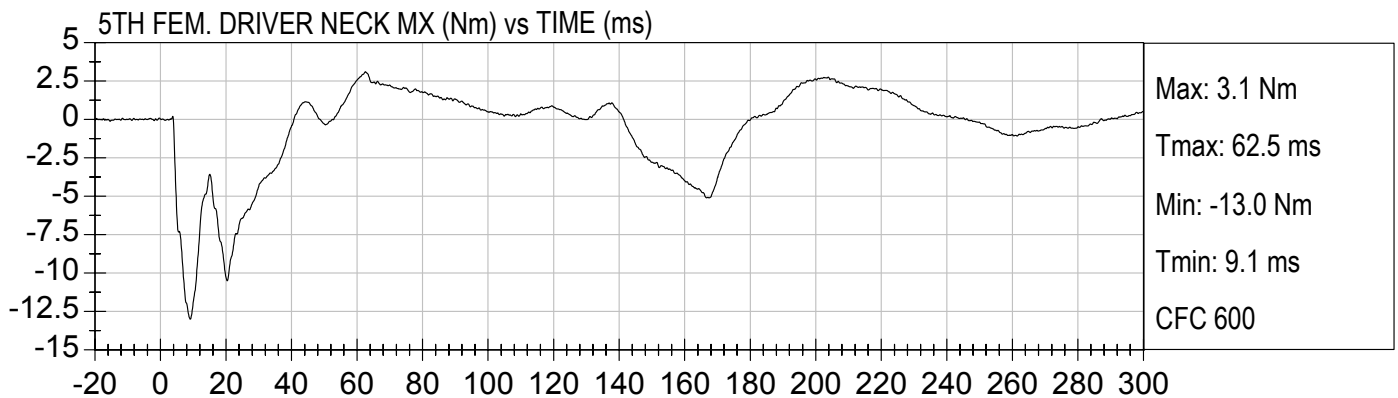

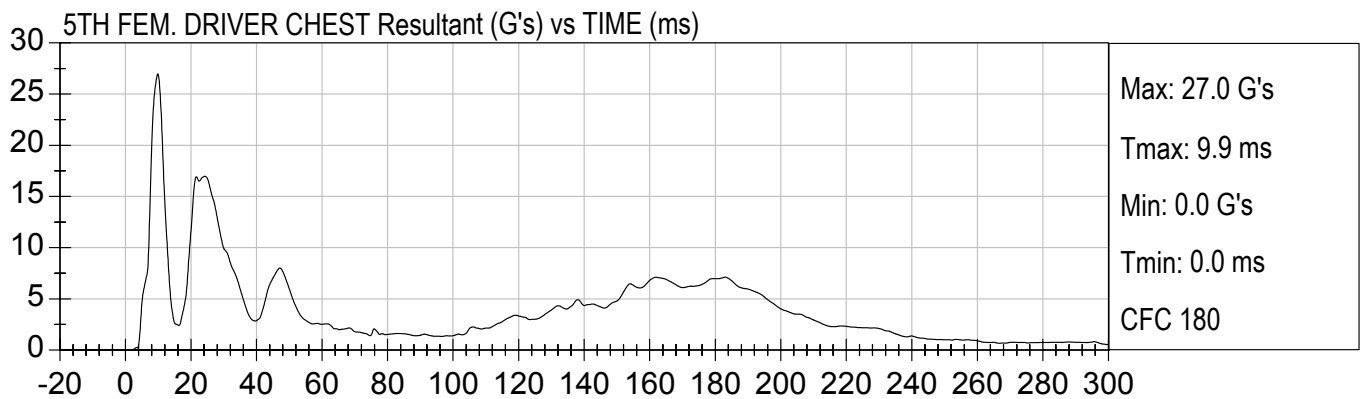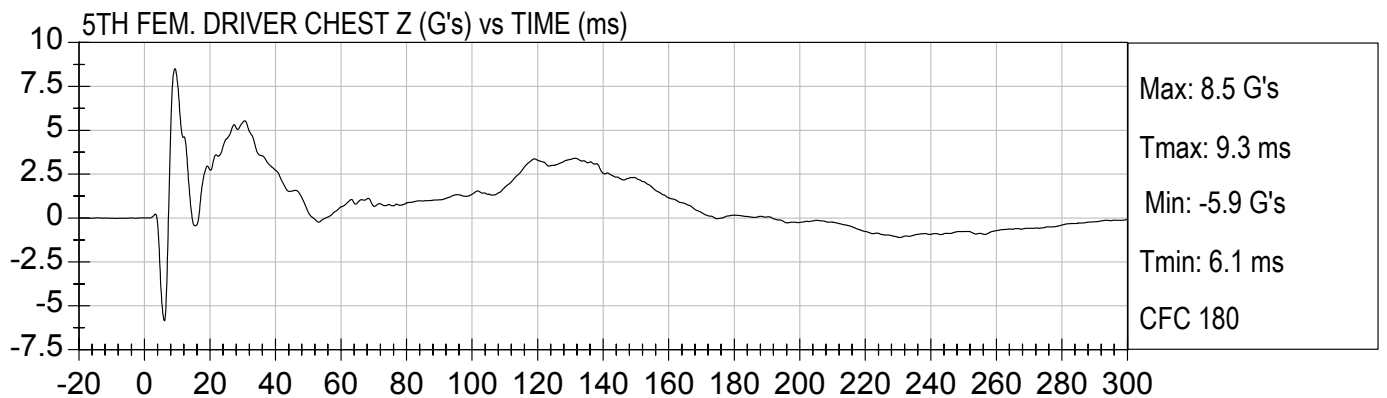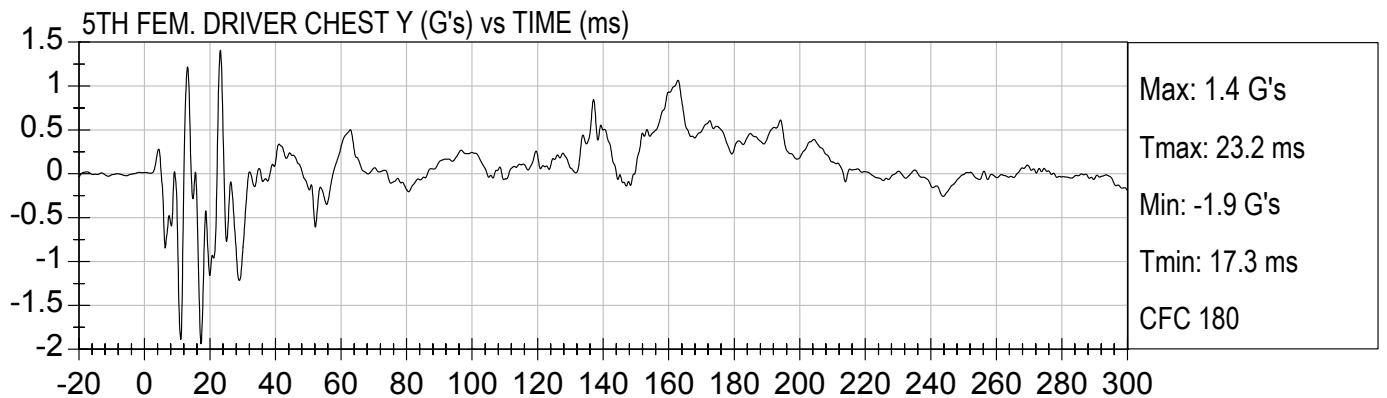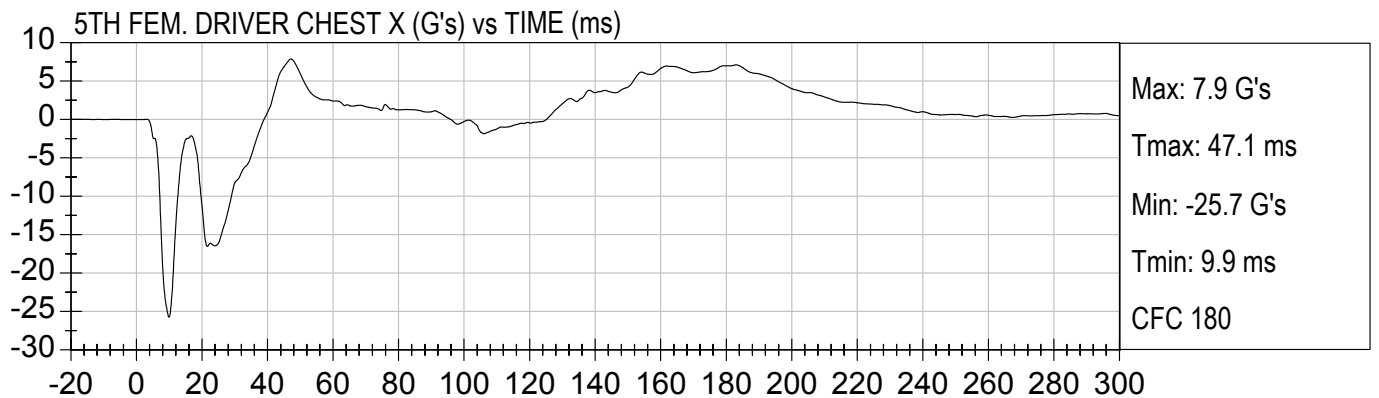





5TH FEM. DRIVER CHEST X Velocity (kph) vs TIME (ms)

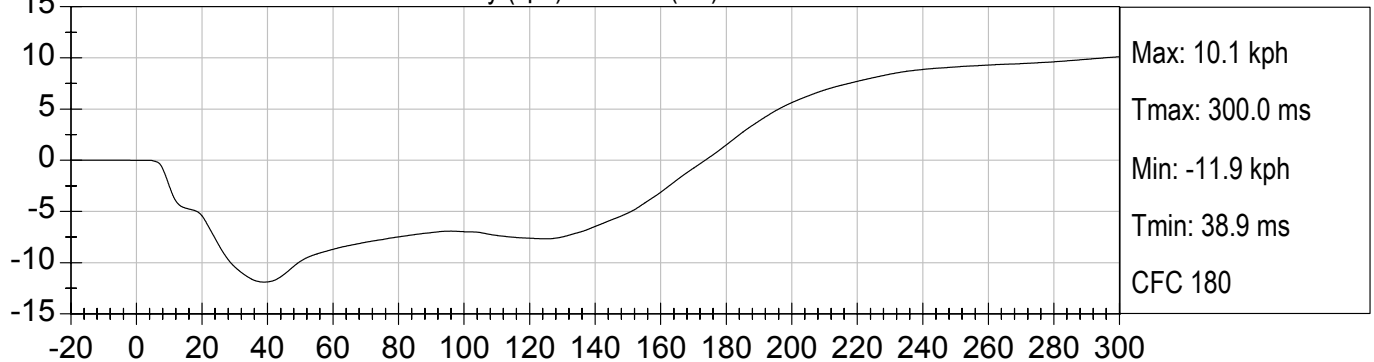


5TH FEM. DRIVER CHEST Y Velocity (kph) vs TIME (ms)


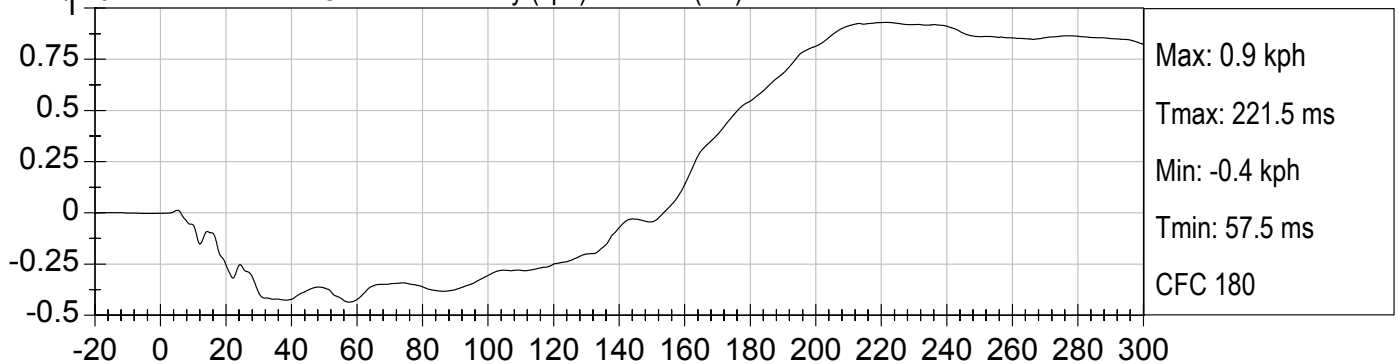


5TH FEM. DRIVER CHEST Z Velocity (kph) vs TIME (ms)

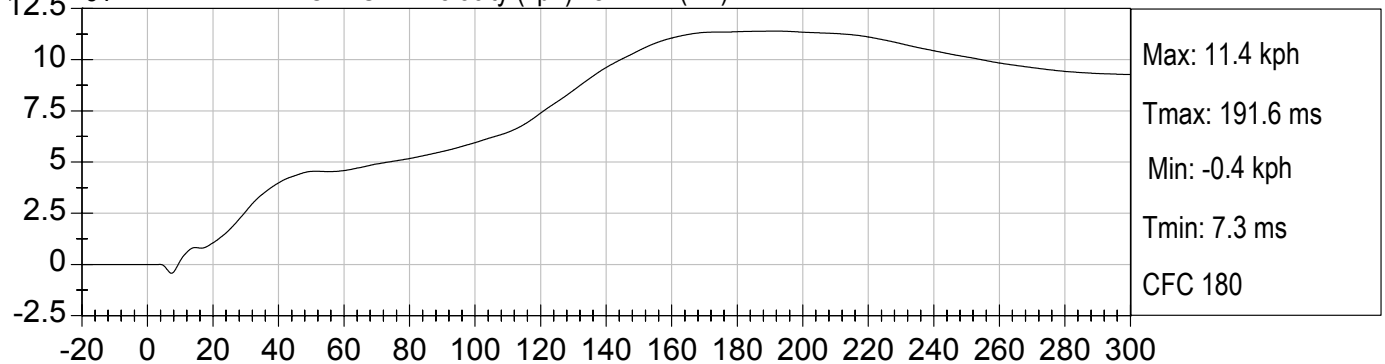


5TH FEM. DRIVER CHEST DISPLACEMENT (mm) vs TIME (ms)

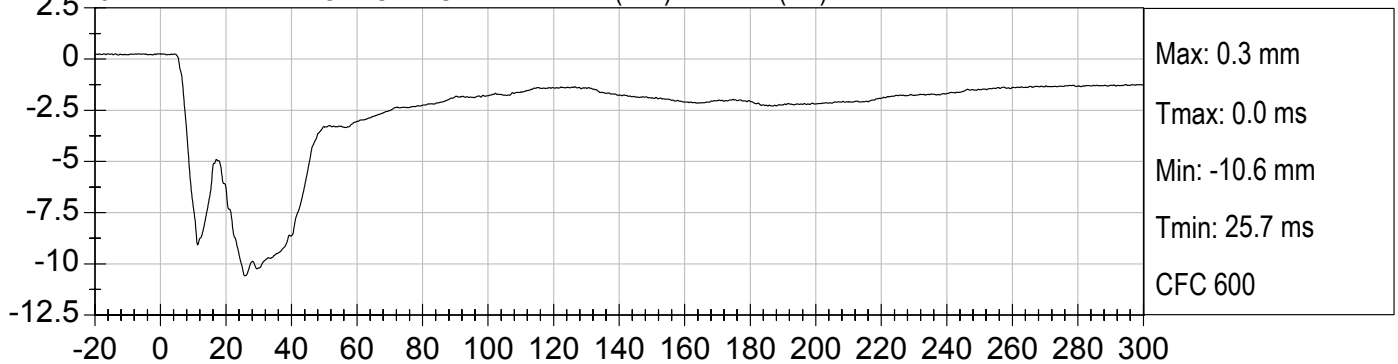

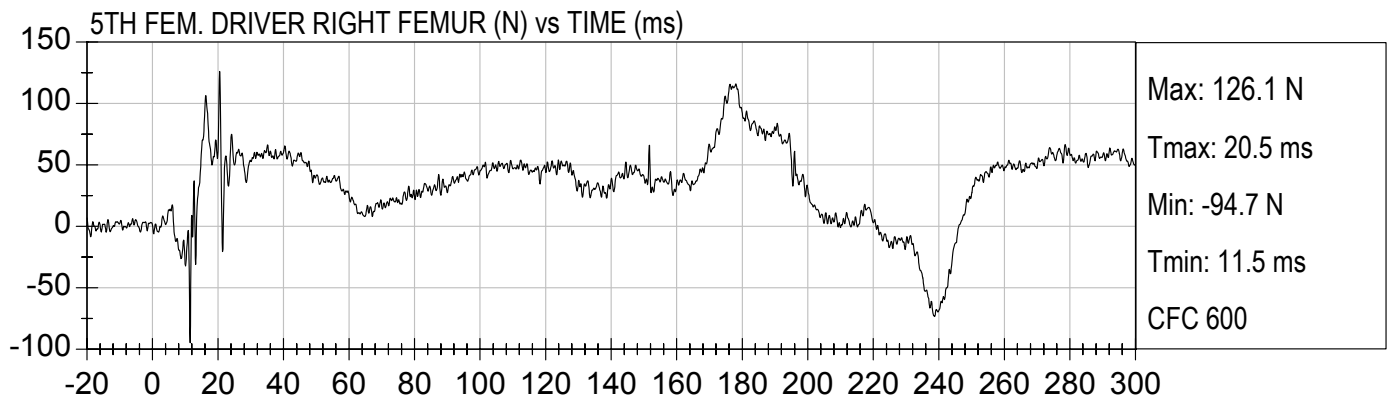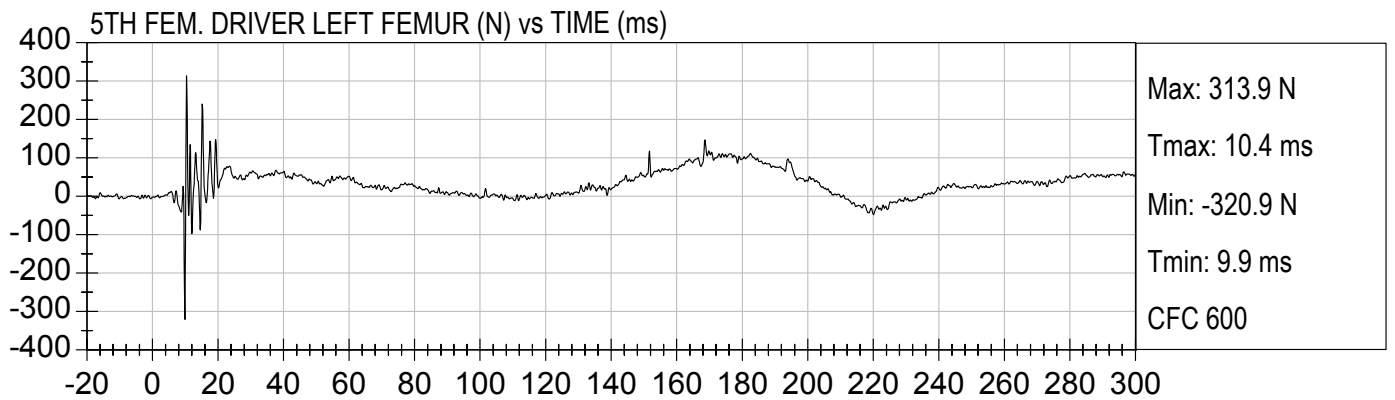





FIRE VOLTAGE #1 (Volts) vs TIME (ms)

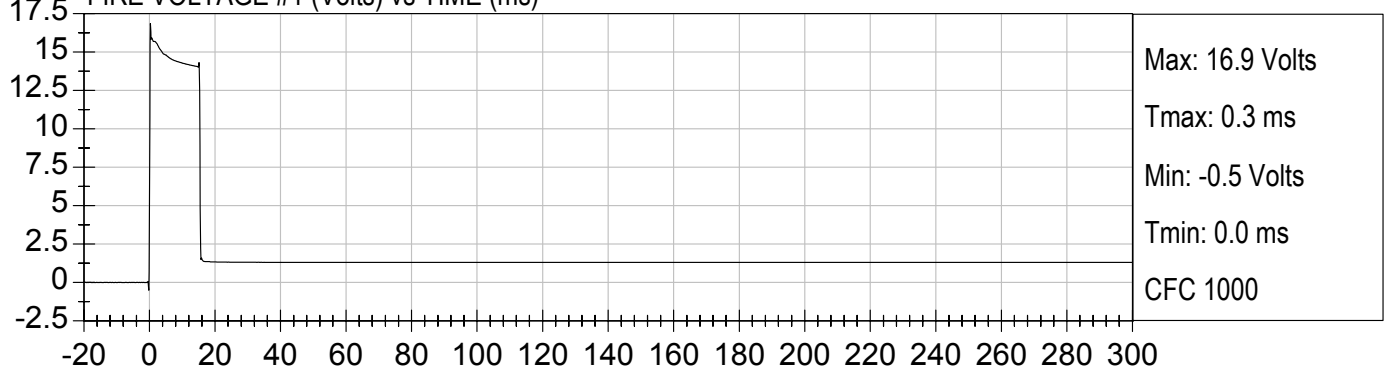


FIRE CURRENT #1 (Amps) vs TIME (ms)

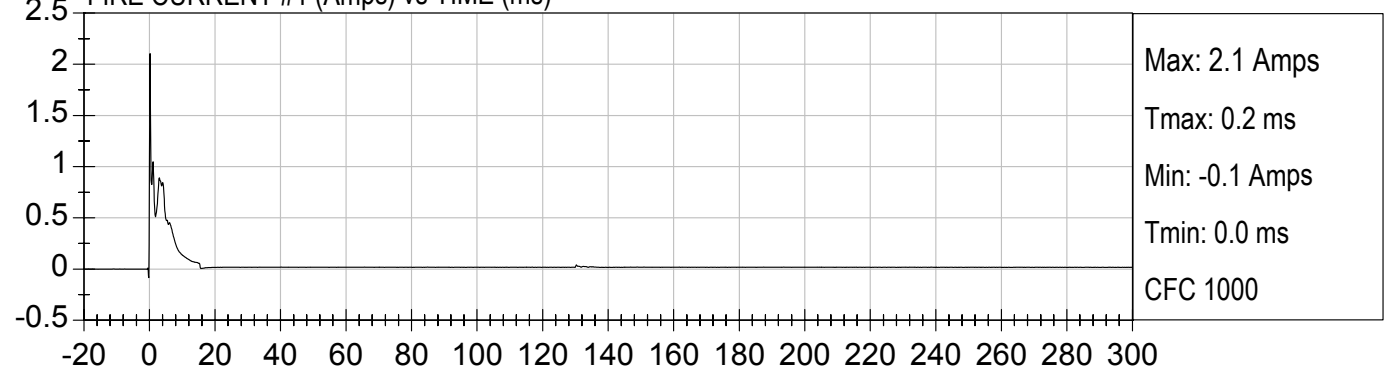

FIRE VOLTAGE #2 (Volts) vs TIME (ms)

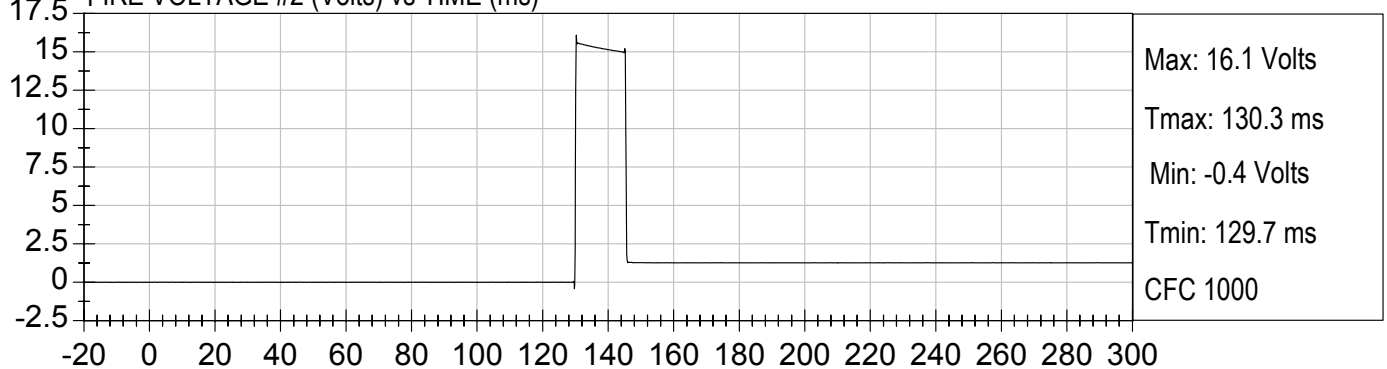


FIRE CURRENT #2 (Amps) vs TIME (ms)

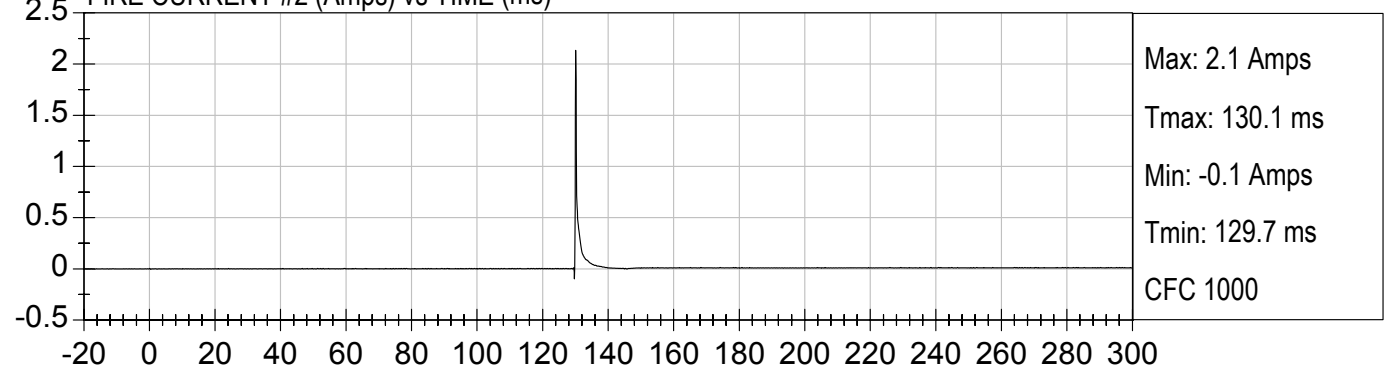




Drv. nij (NTF) () vs TIME SPECIAL CHS (ms)

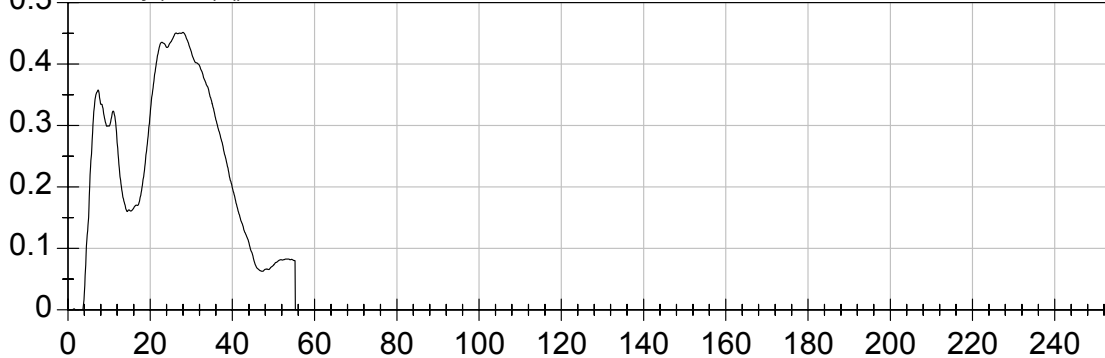


Max: 0.5
Tmax: 28.0 ms
Min: 0.0
Tmin: 0.1 ms
CFC 1000

Drv. nij (NTE) () vs TIME SPECIAL CHS (ms)

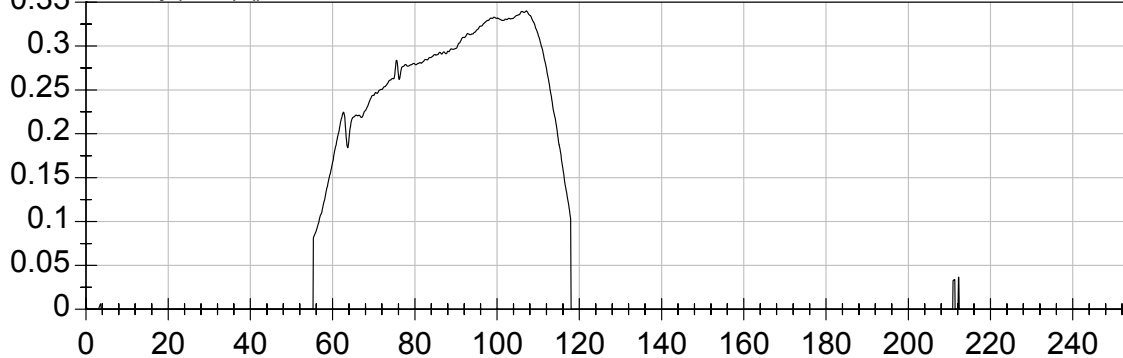


Max: 0.3
Tmax: 107.1 ms
Min: 0.0
Tmin: 0.3 ms
CFC 1000

Drv. nij (NCF) () vs TIME SPECIAL CHS (ms)




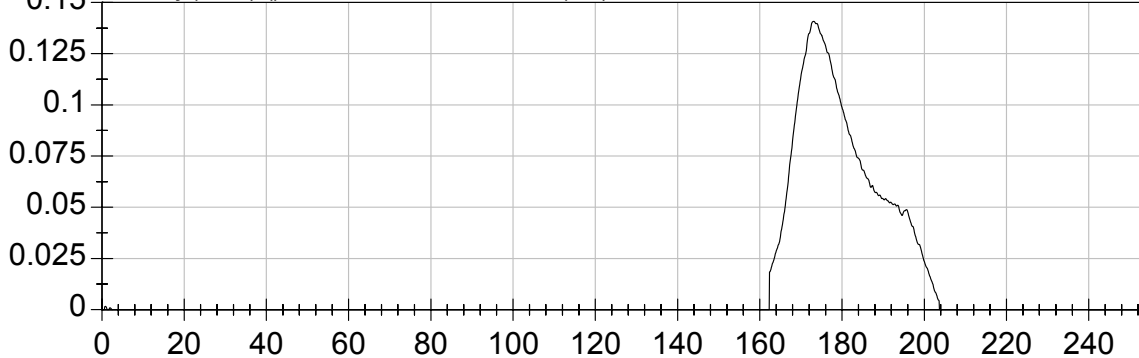





Max: 0.1
Tmax: 173.1 ms
Min: 0.0
Tmin: 0.1 ms
CFC 1000





Drv. nij (NCE) () vs TIME SPECIAL CHS (ms)




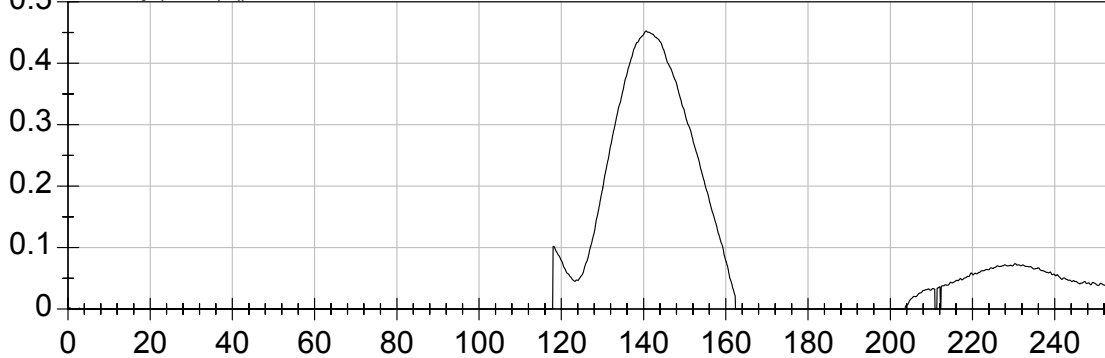






Max: 0.5
Tmax: 140.6 ms
Min: 0.0
Tmin: 0.1 ms
CFC 1000

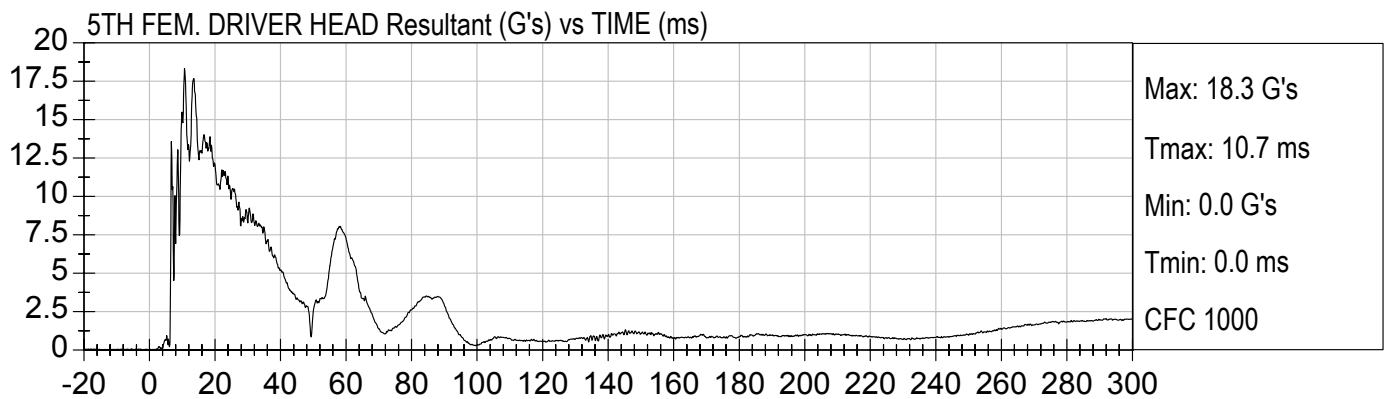
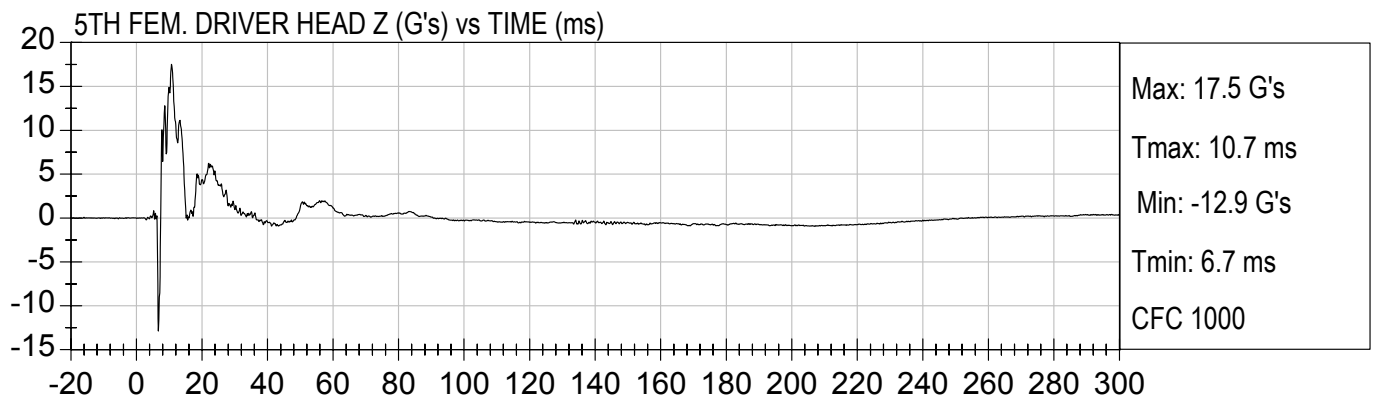
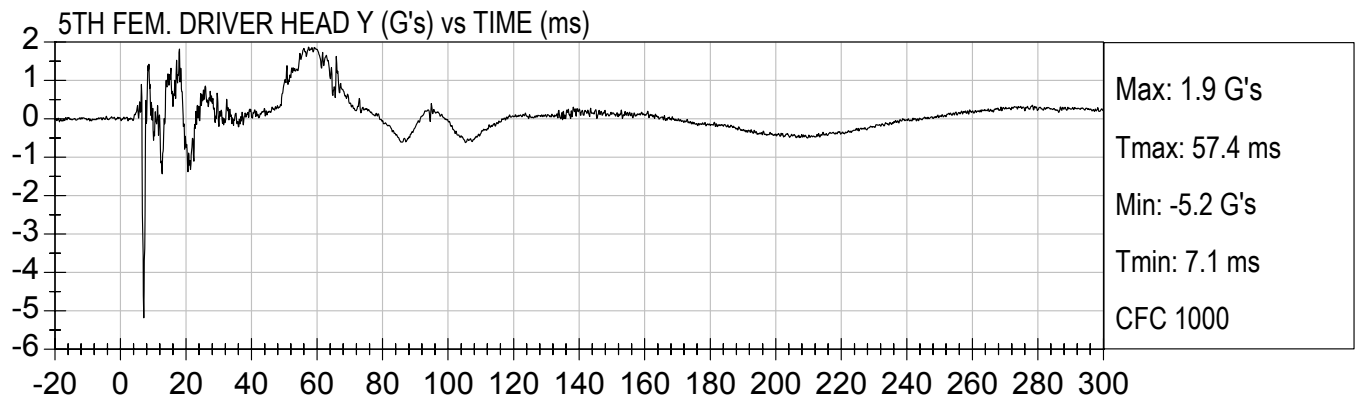
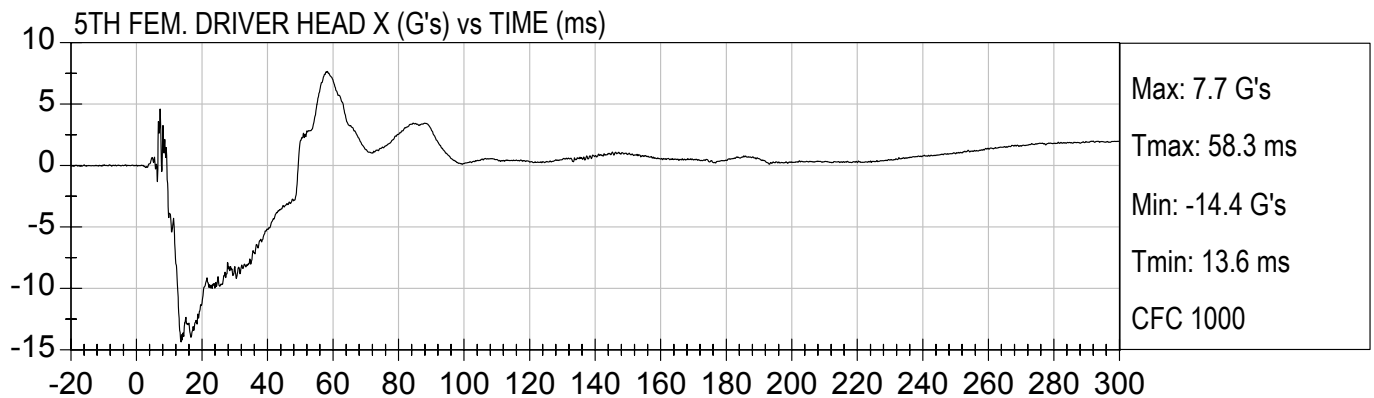


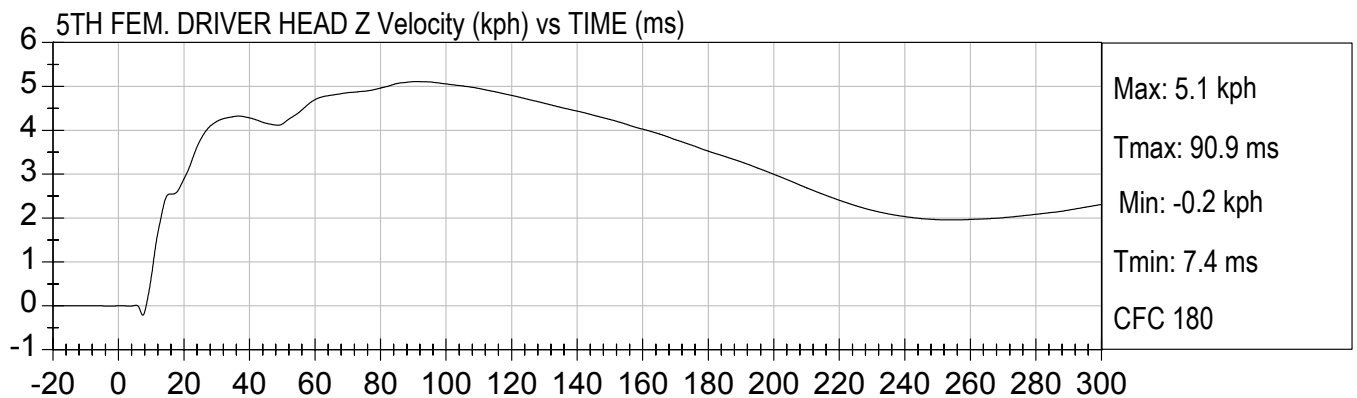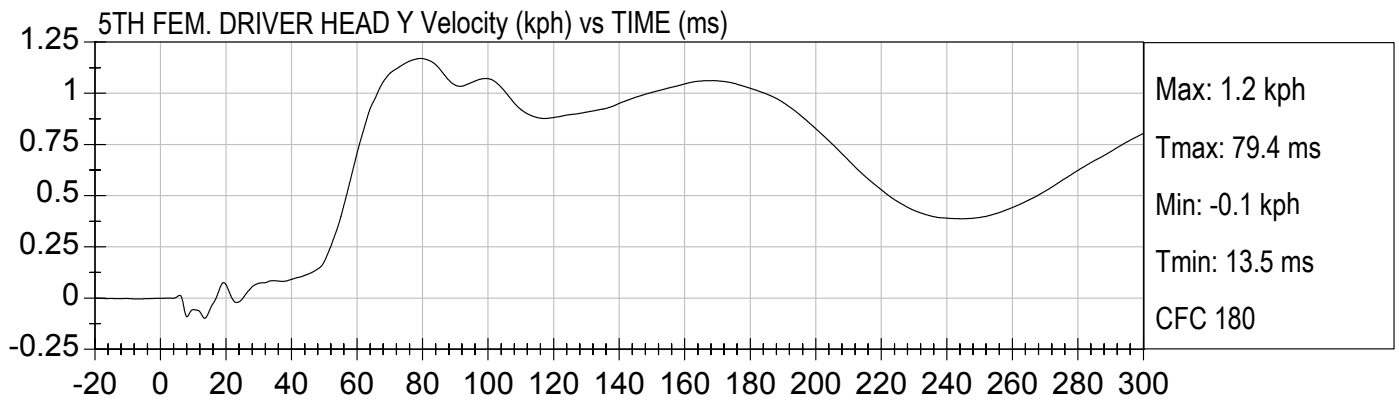
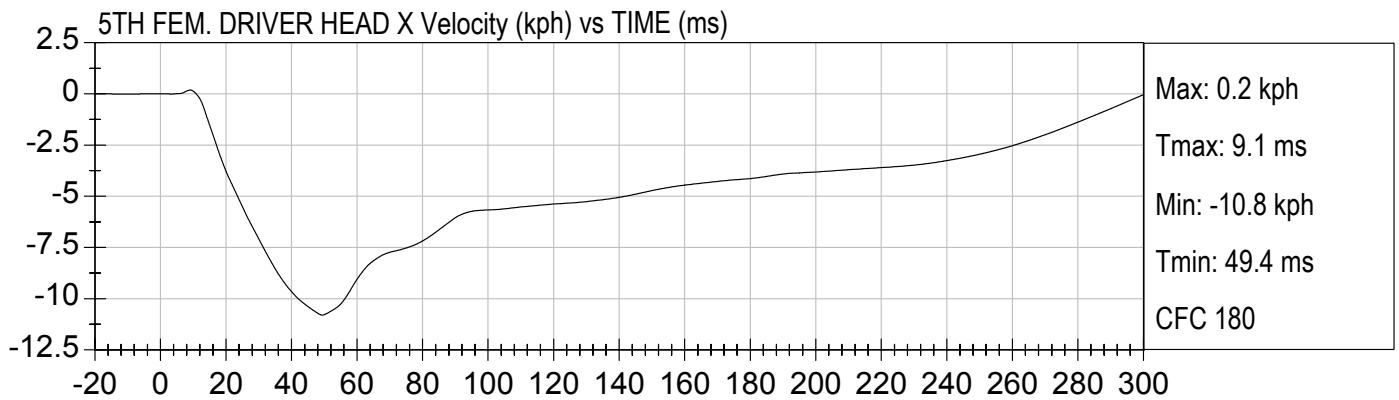


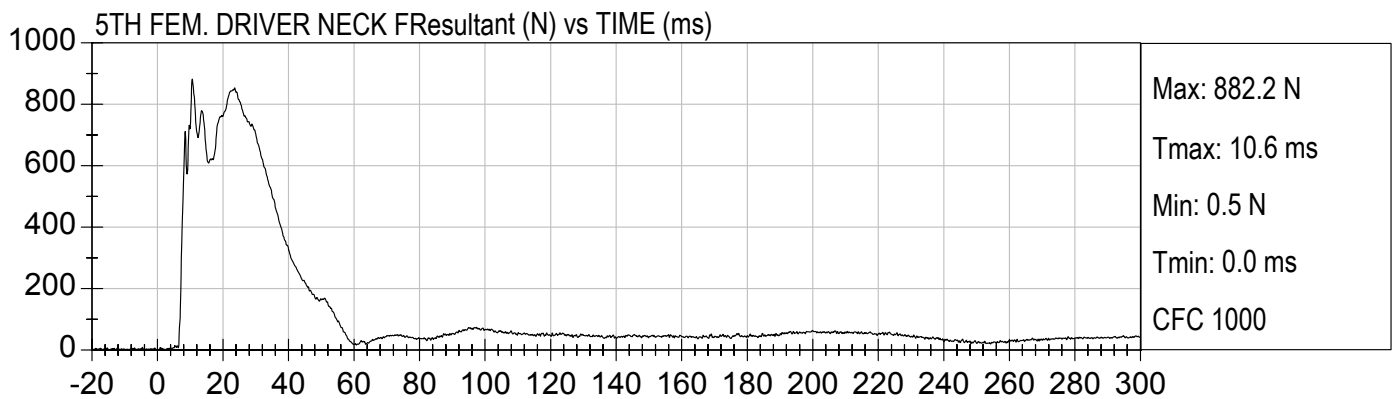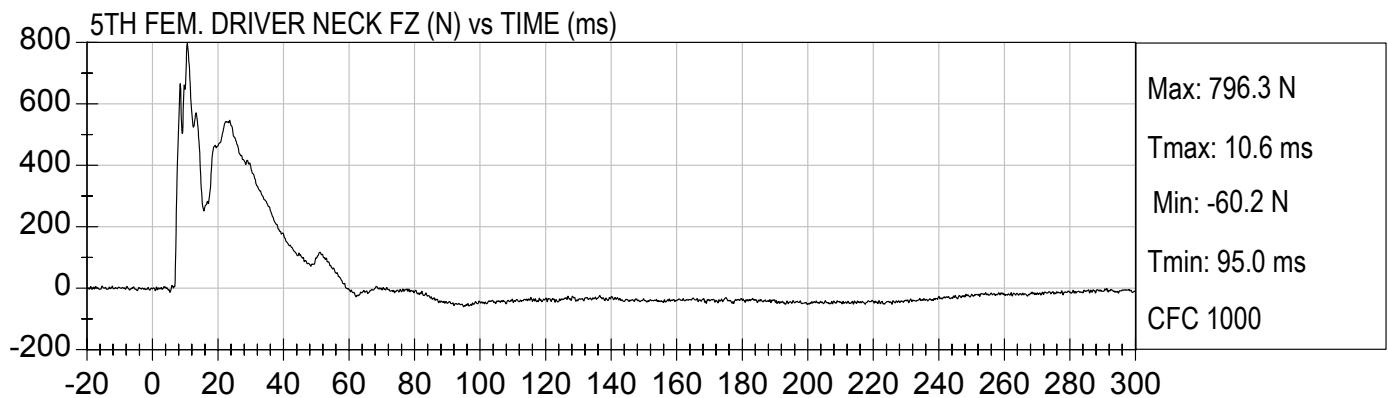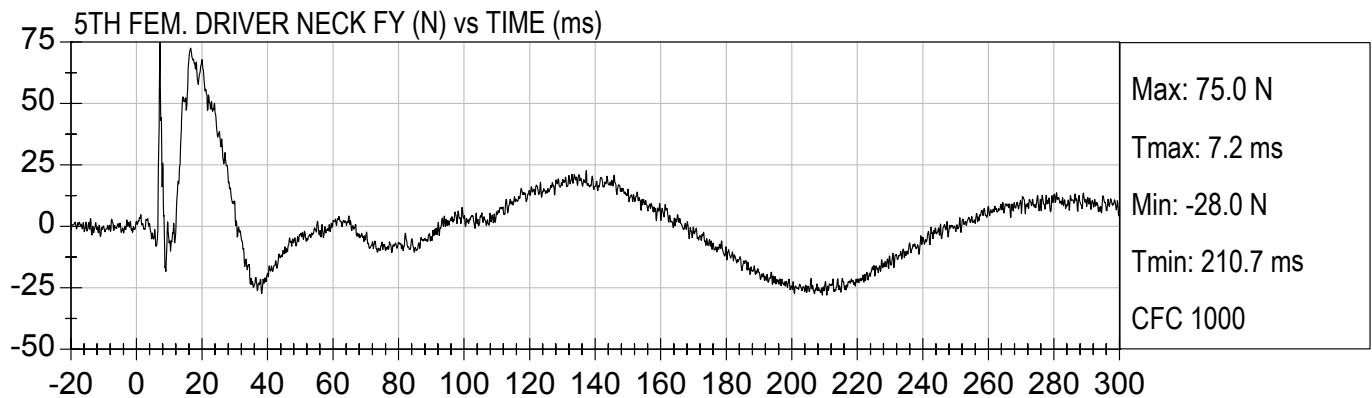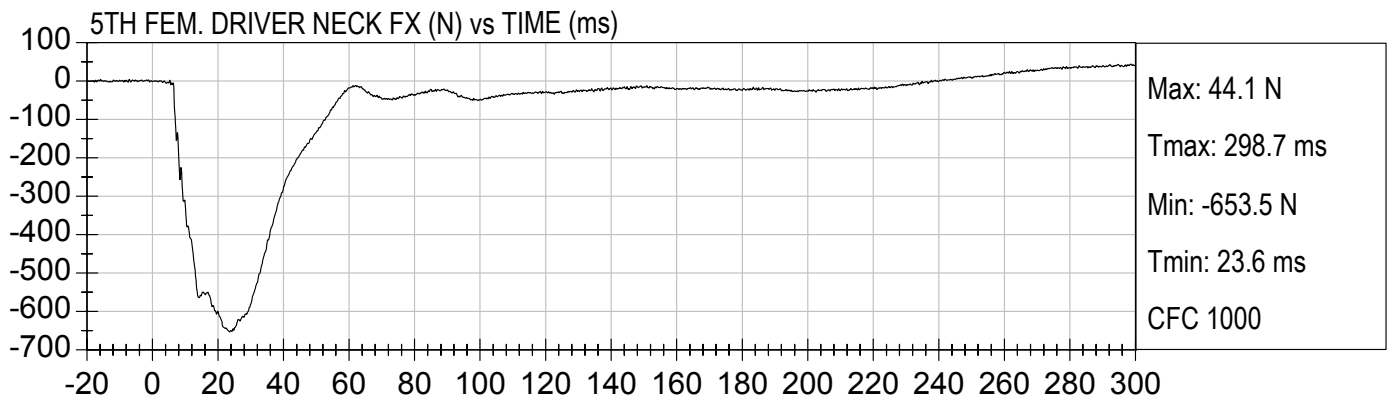

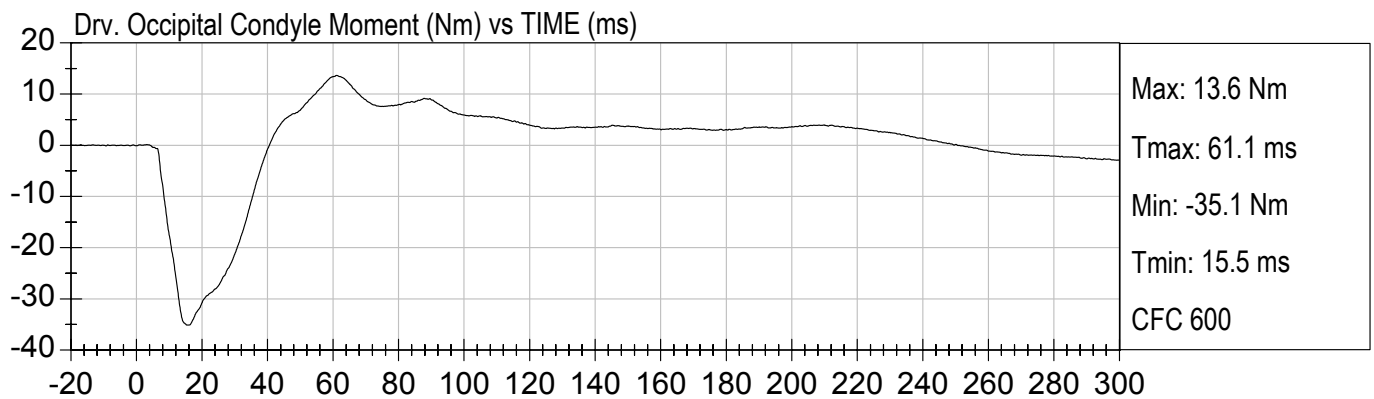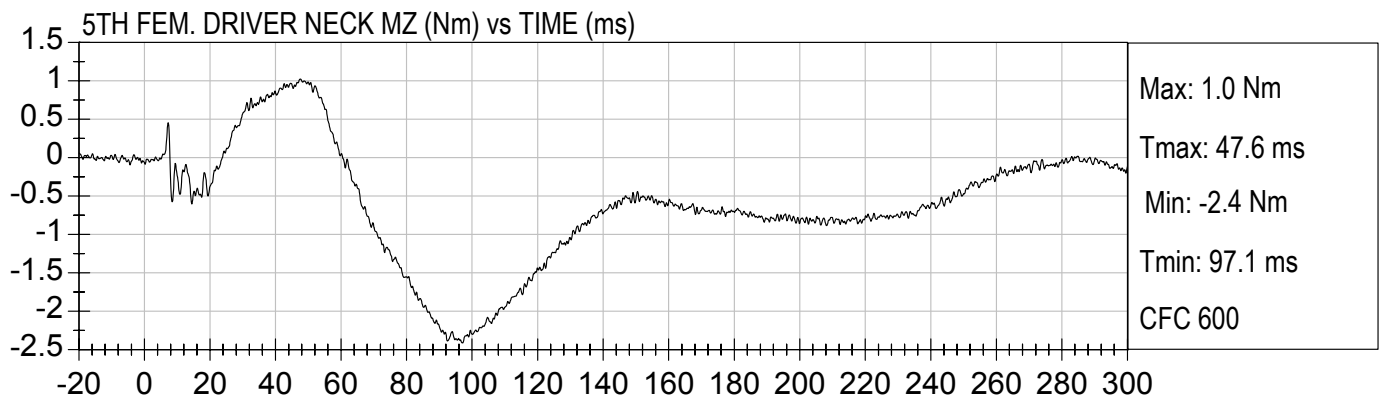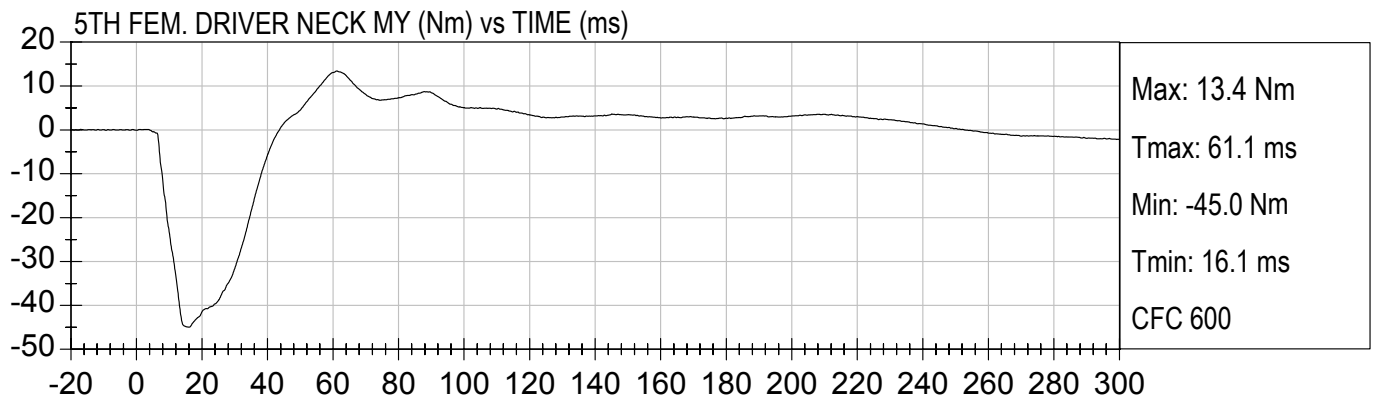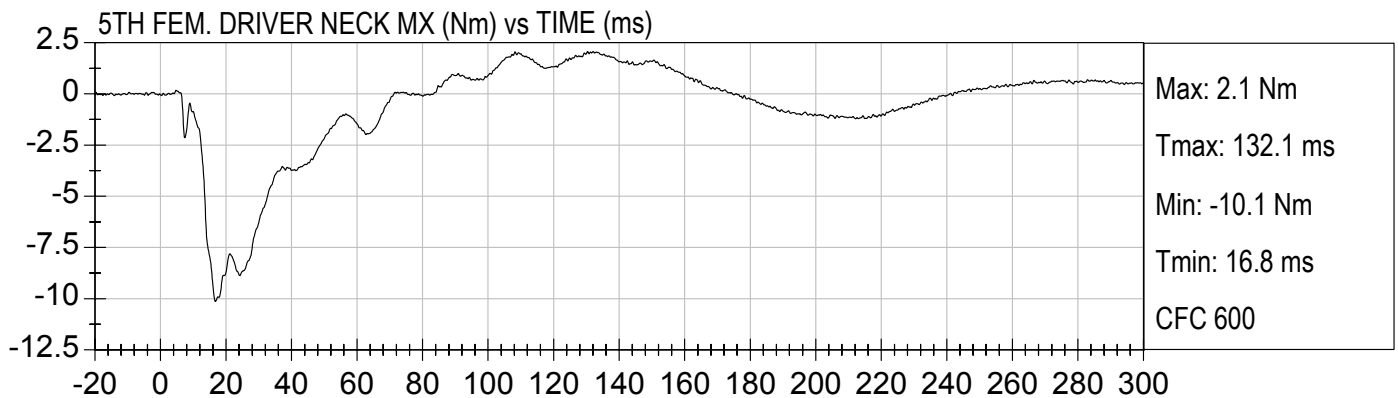

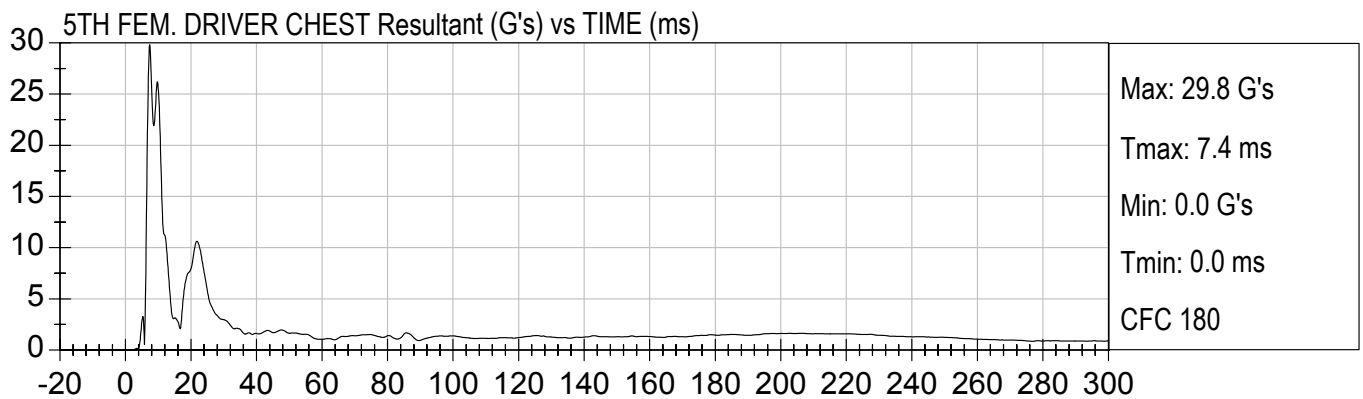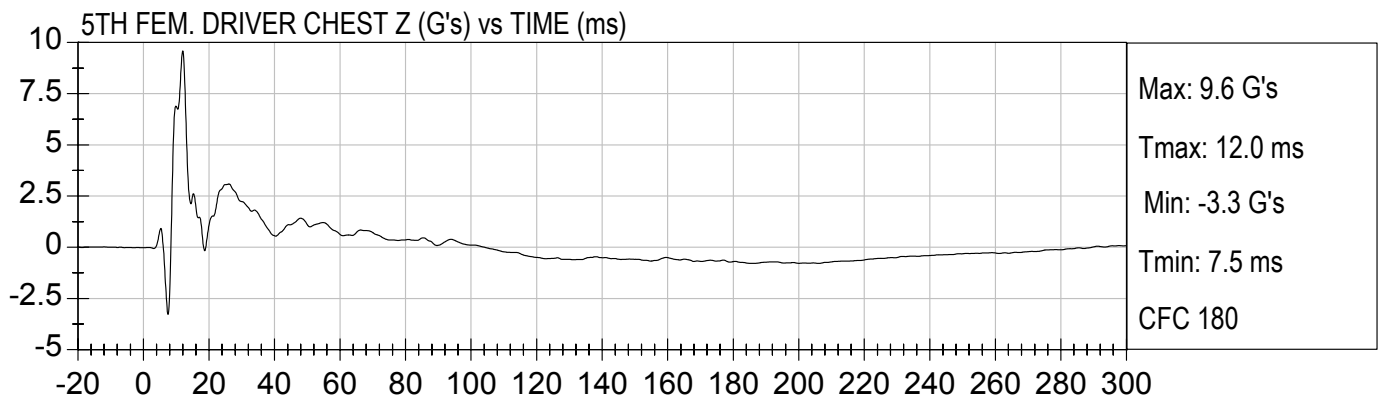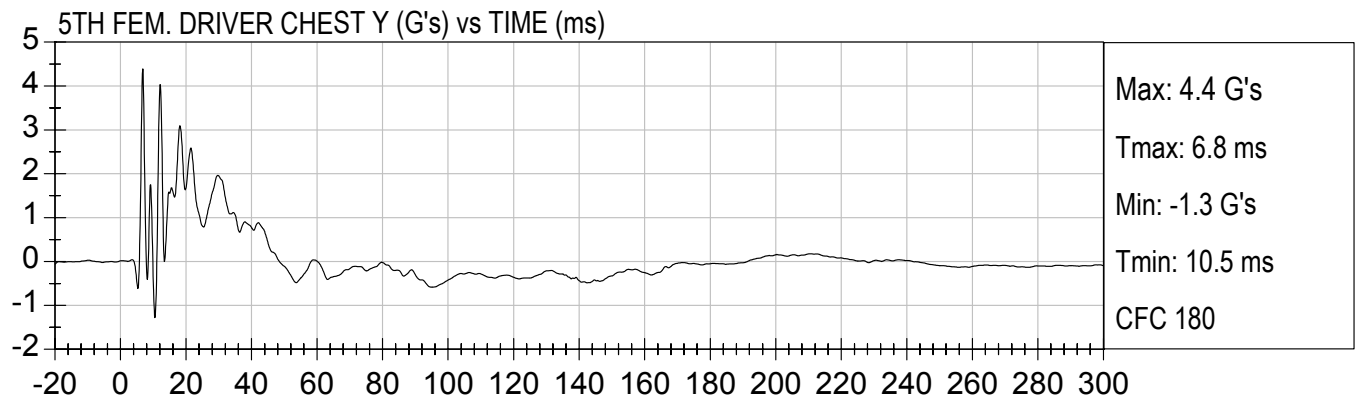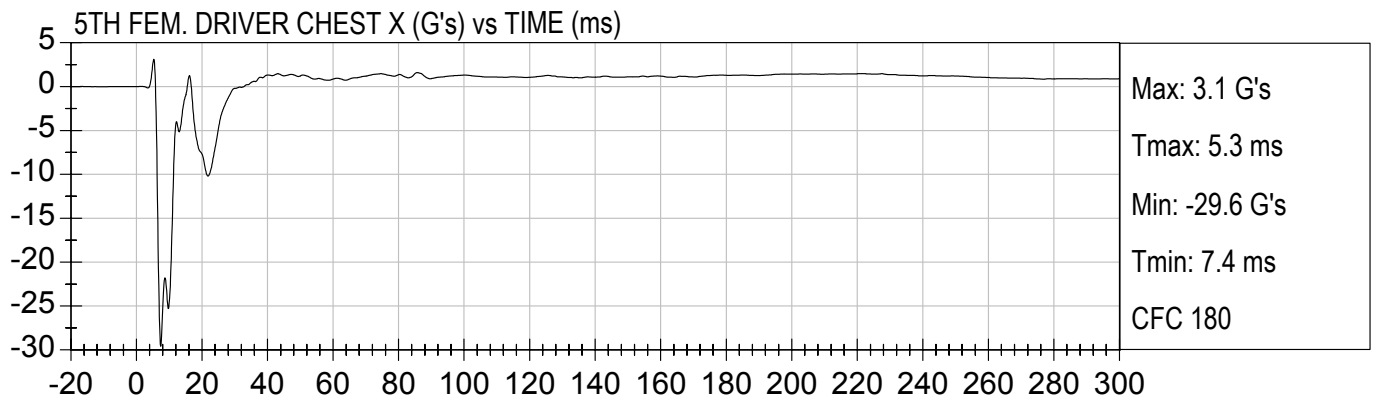


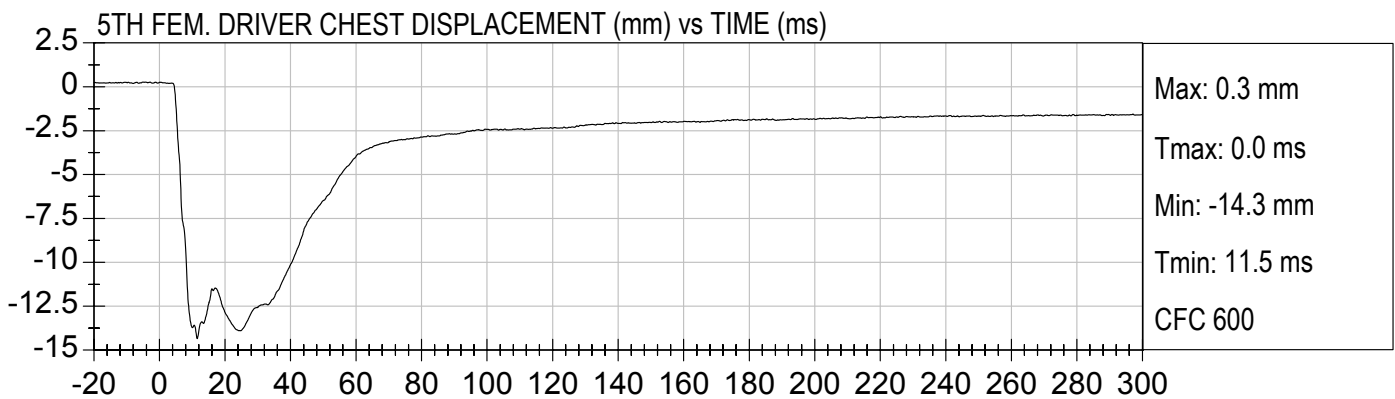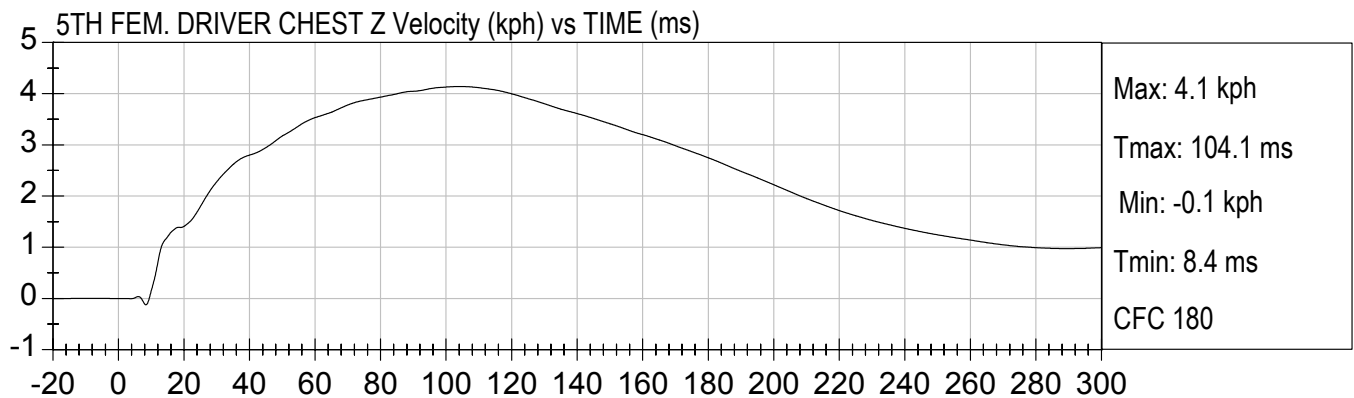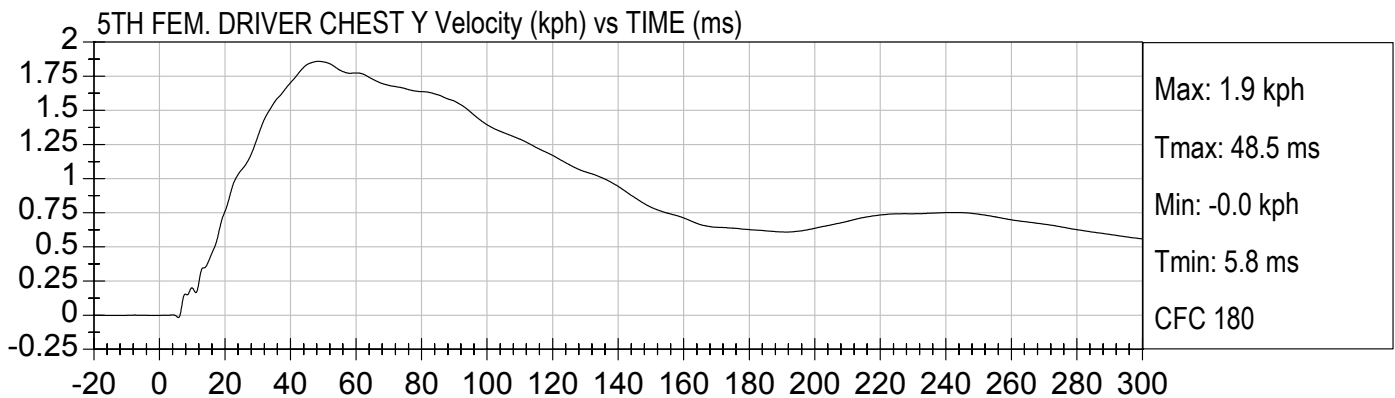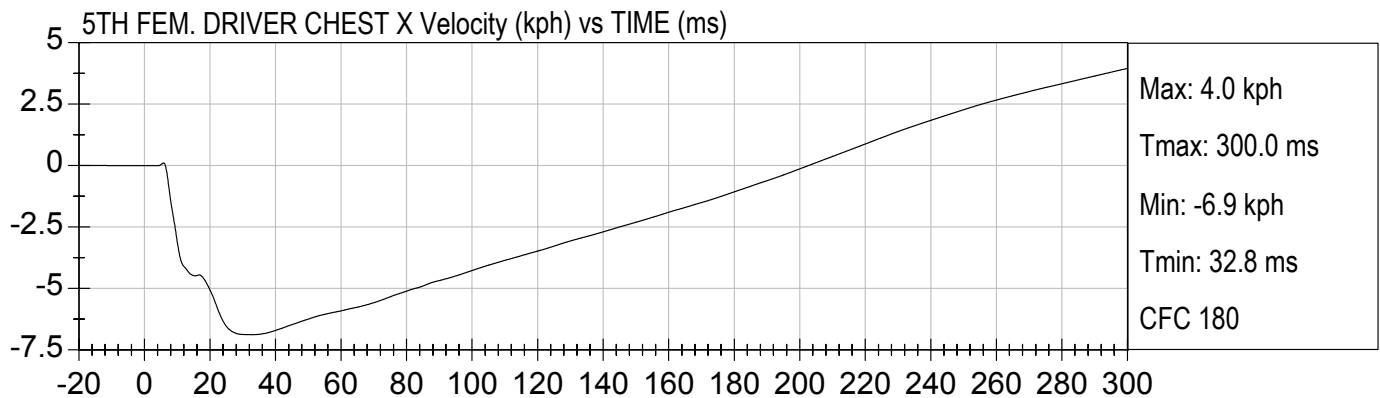

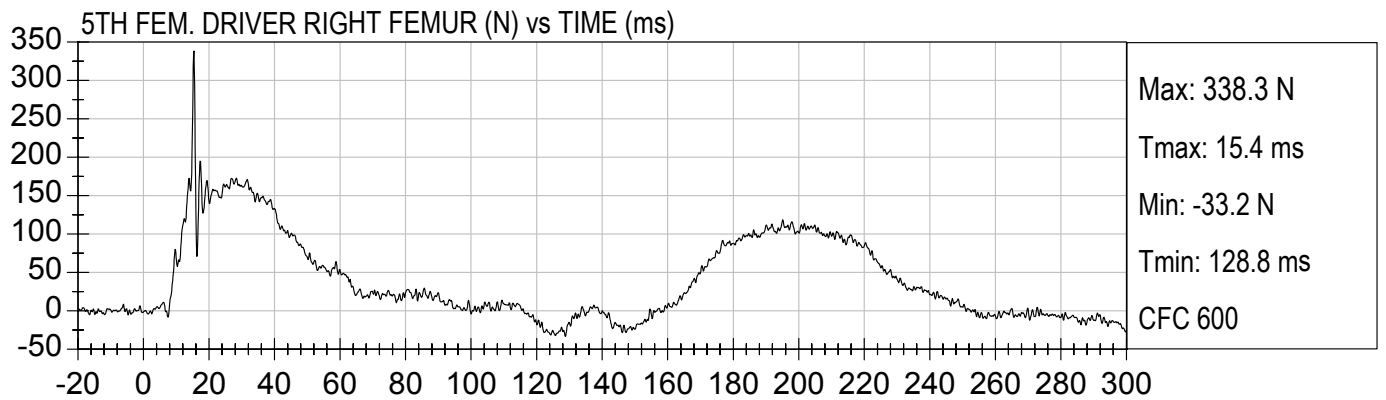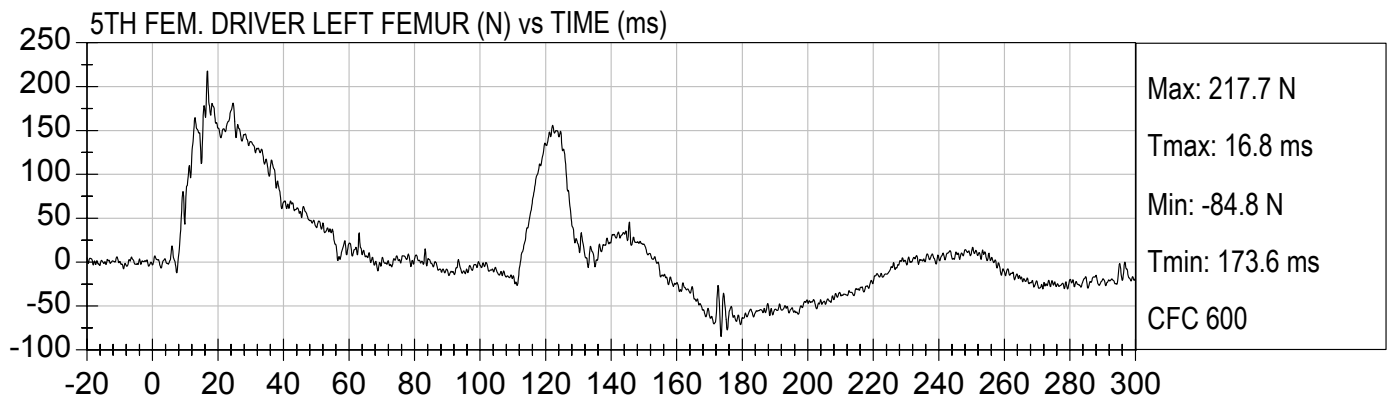





FIRE VOLTAGE #1 (Volts) vs TIME (ms)

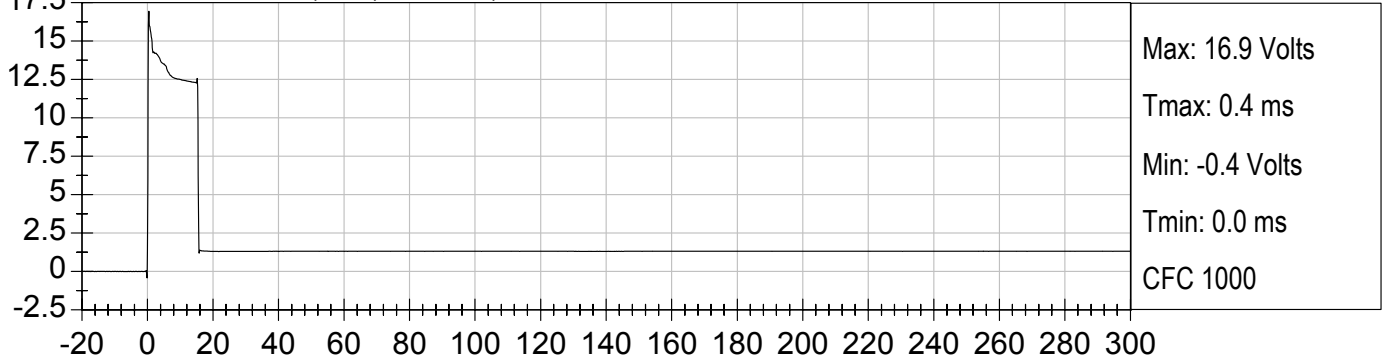


FIRE CURRENT #1 (Amps) vs TIME (ms)




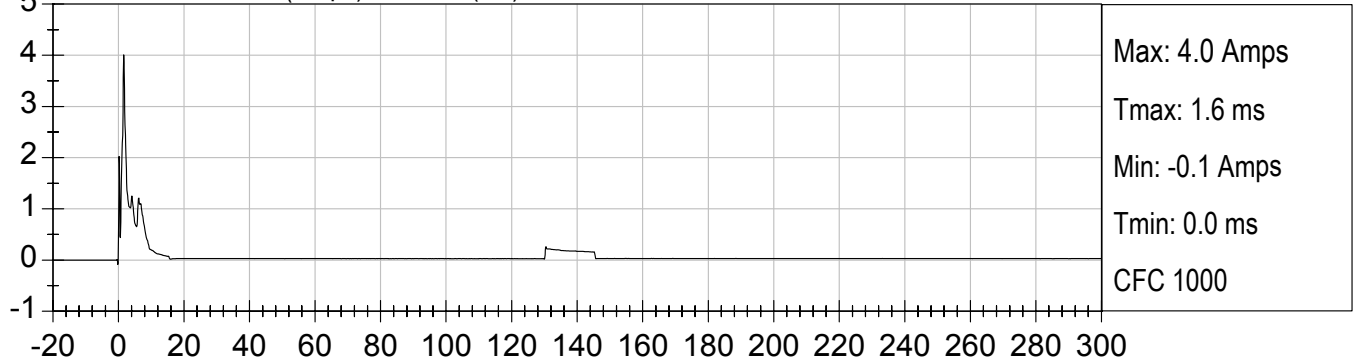






FIRE VOLTAGE #2 (Volts) vs TIME (ms)



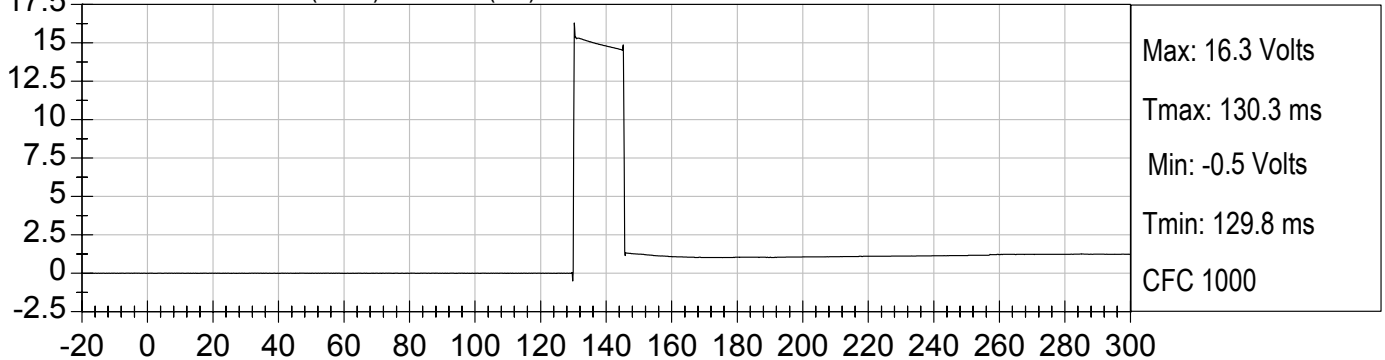






FIRE CURRENT #2 (Amps) vs TIME (ms)

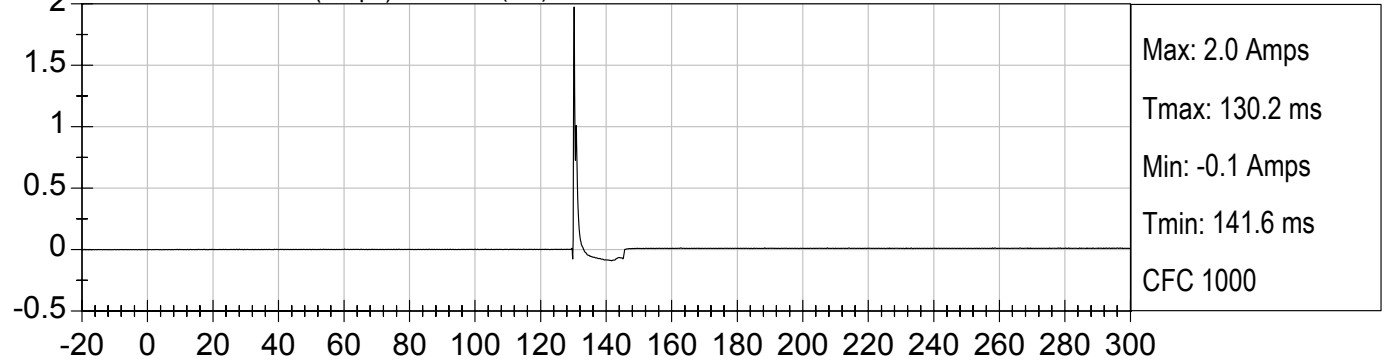

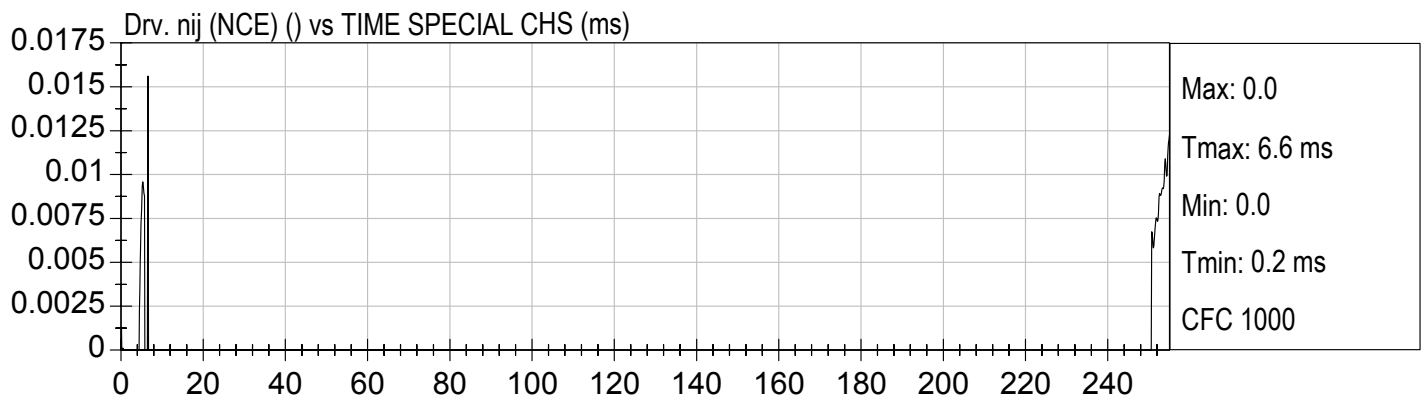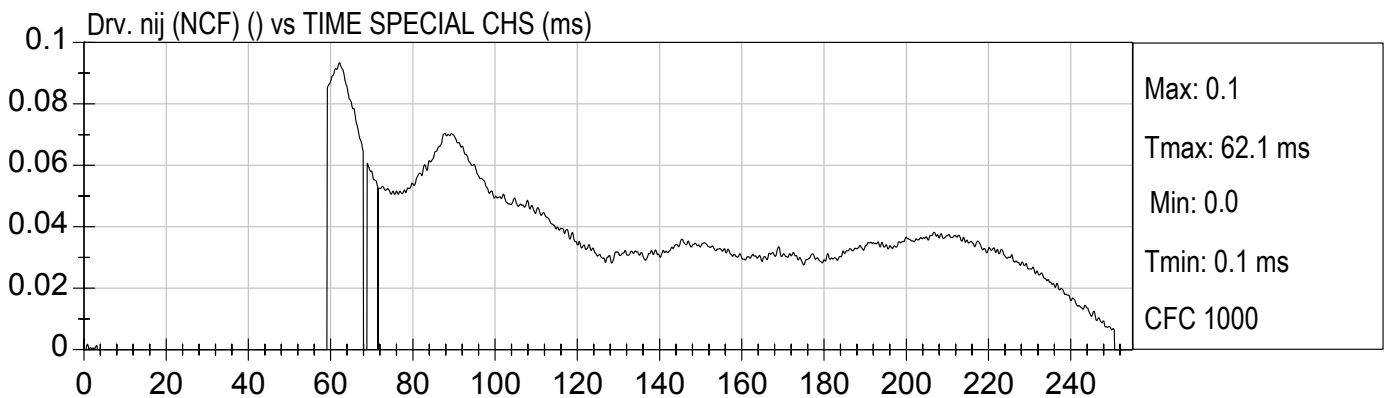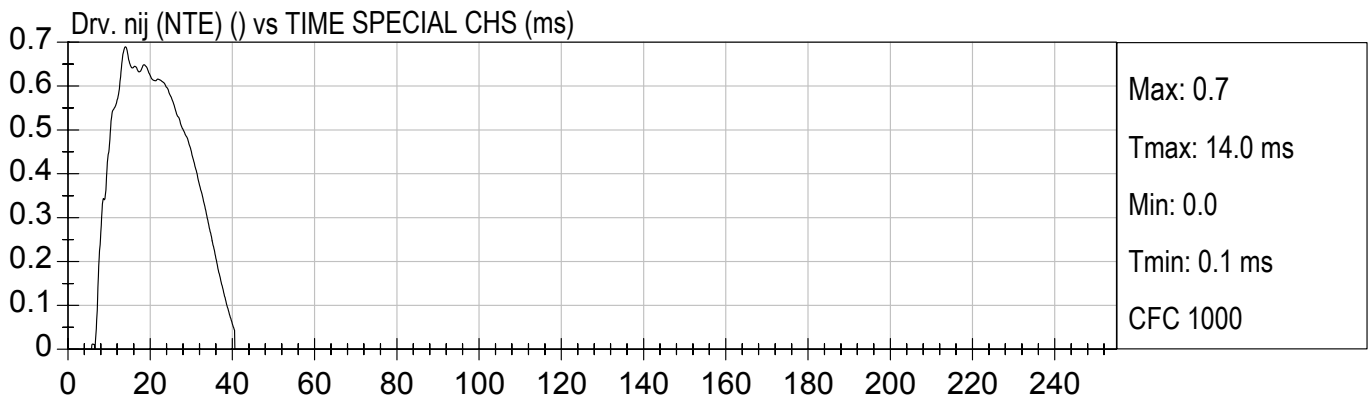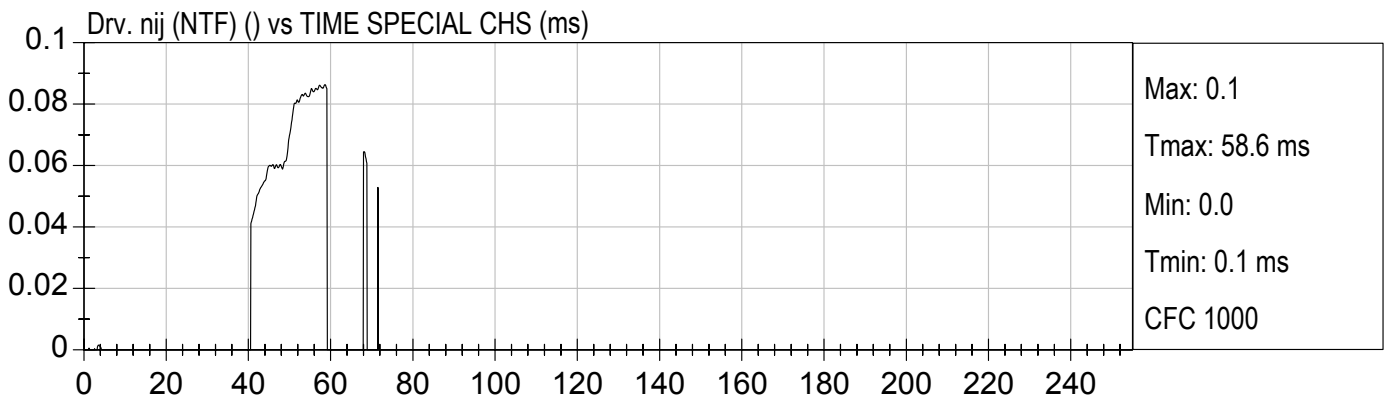

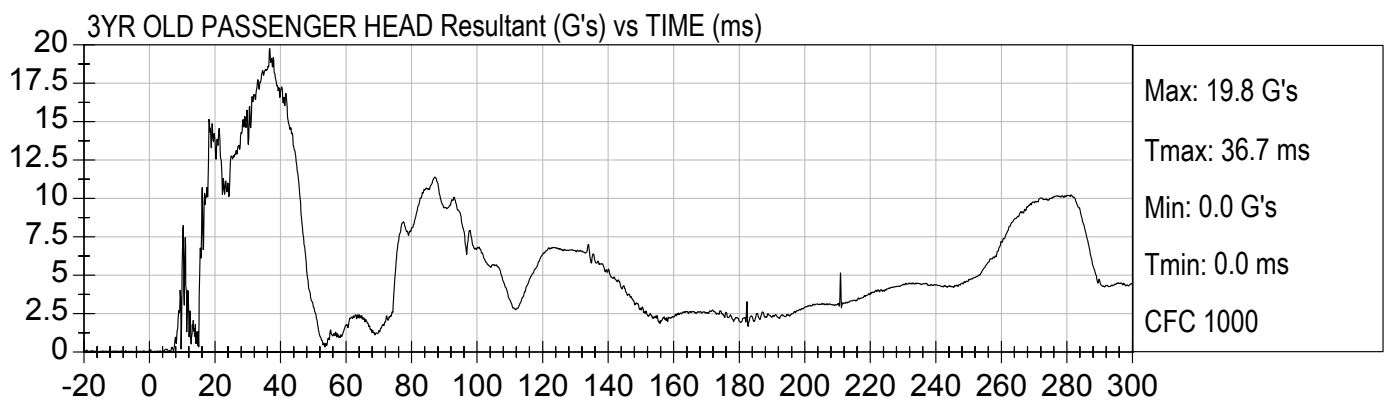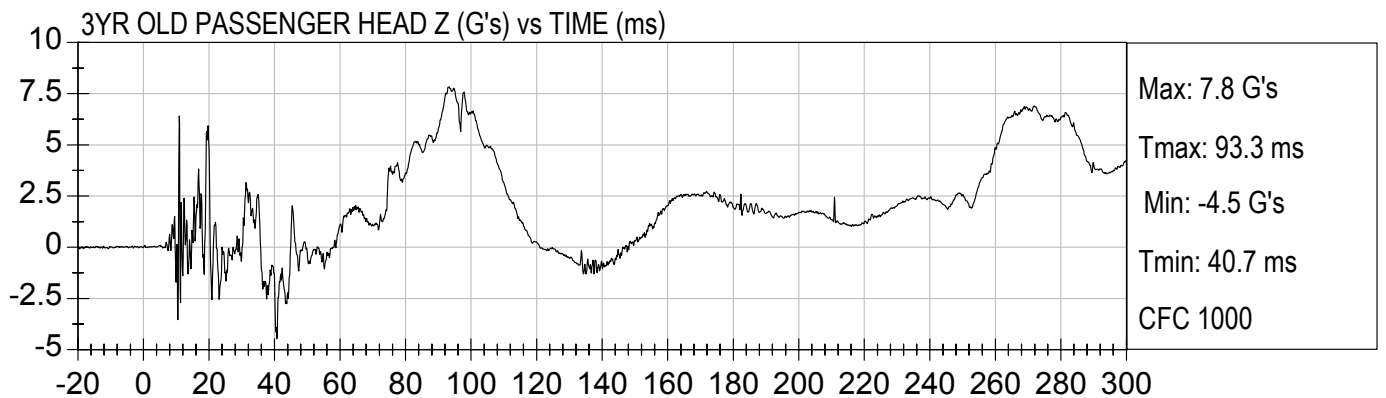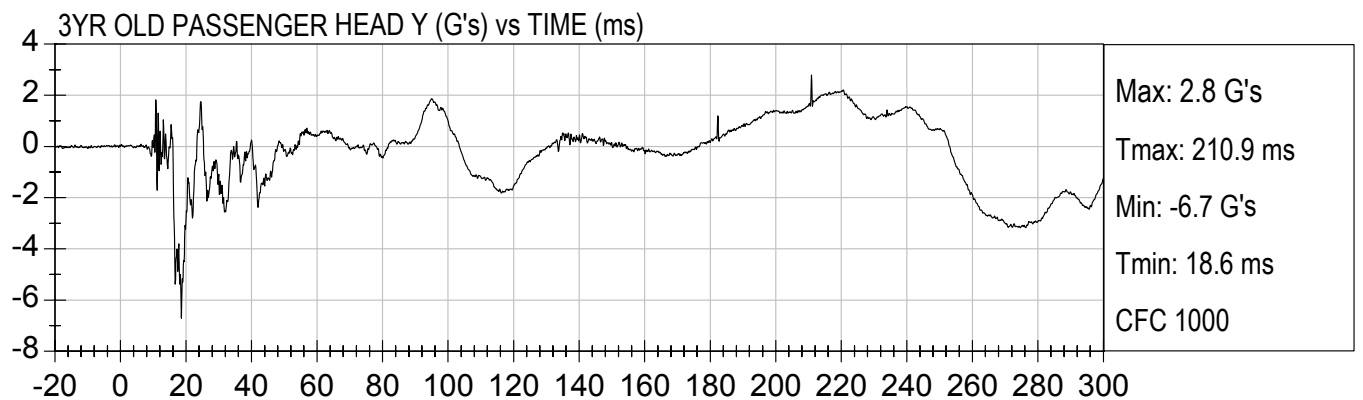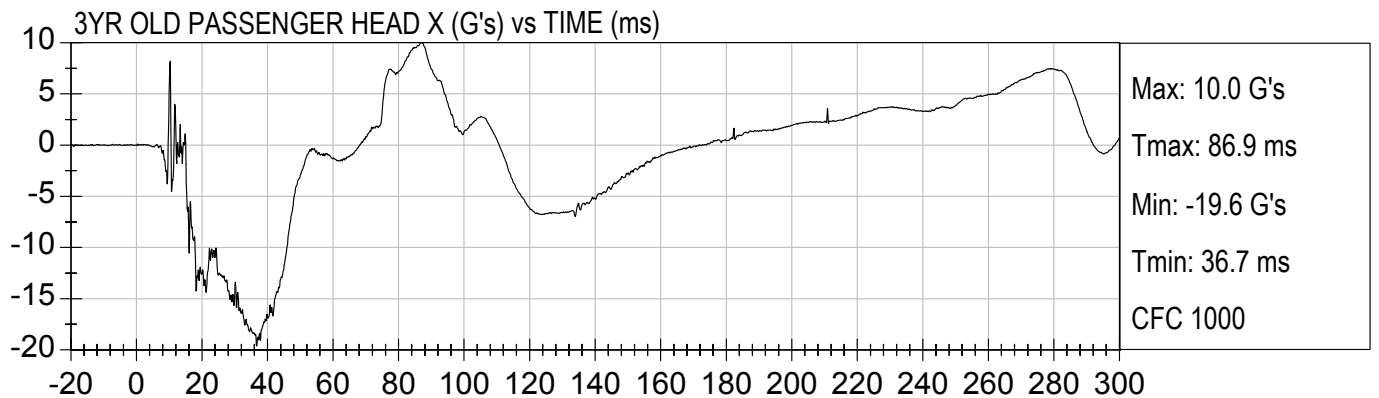


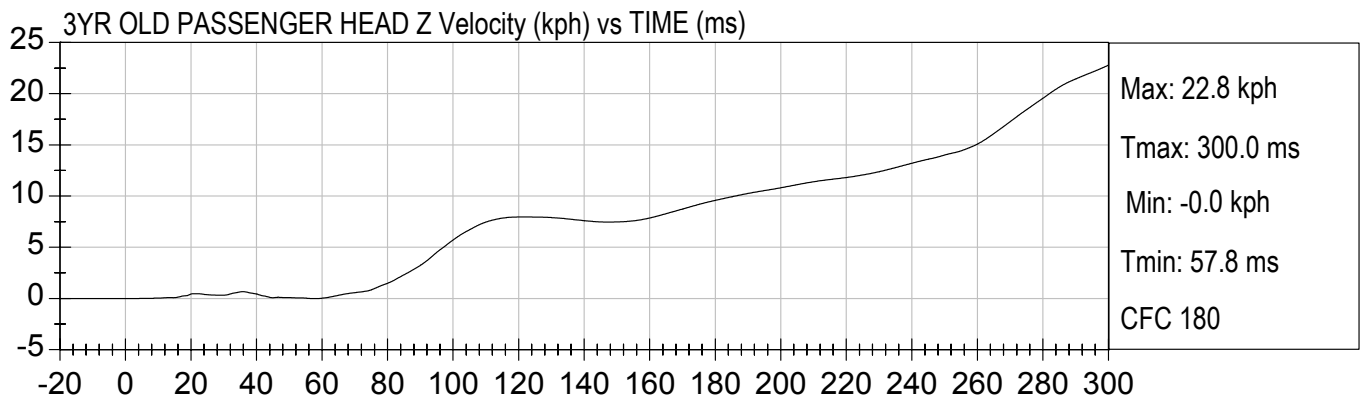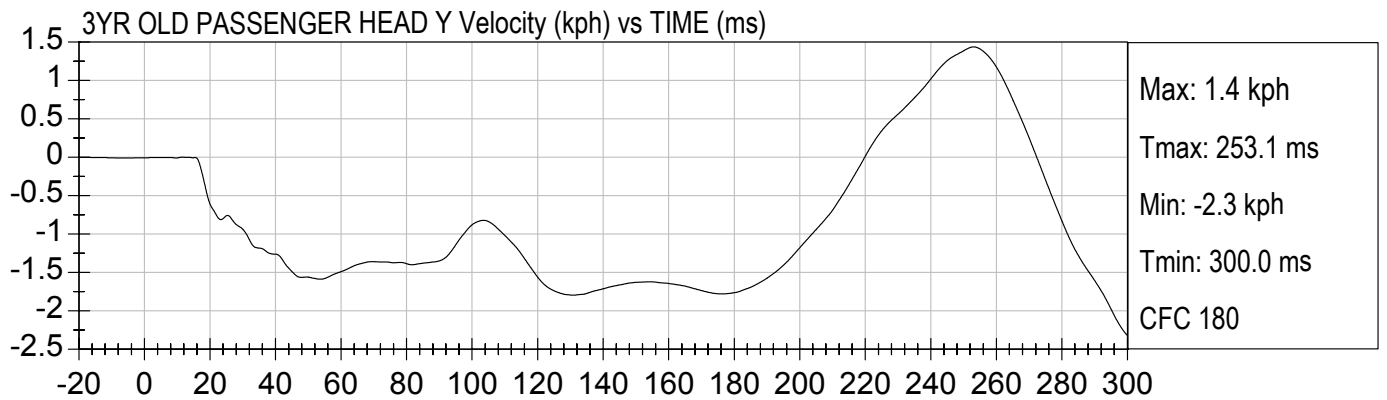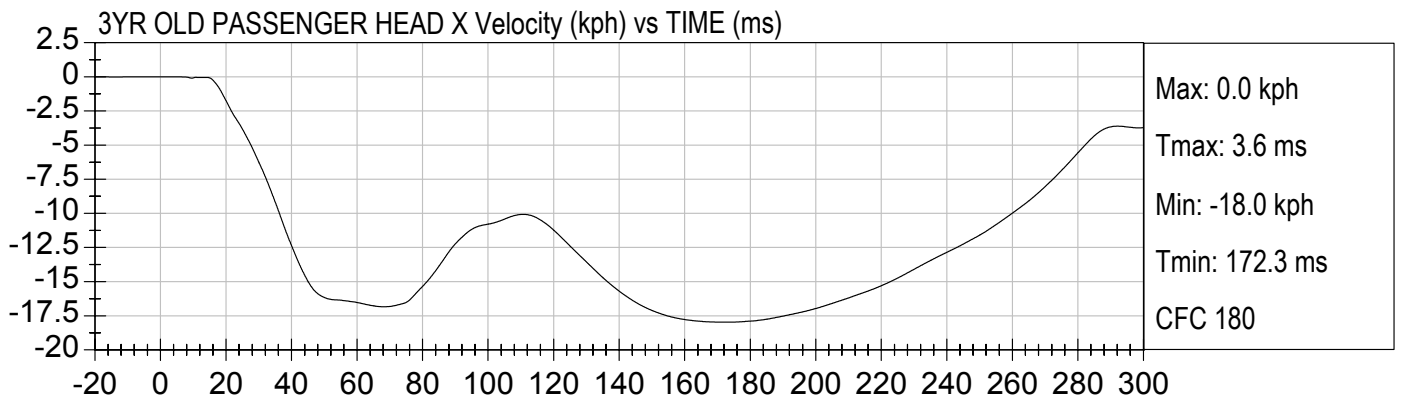

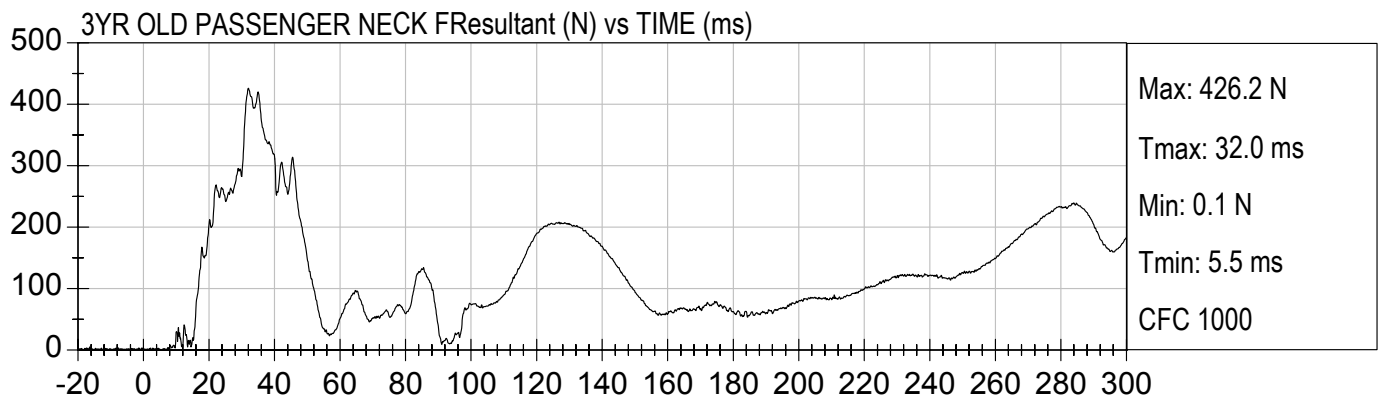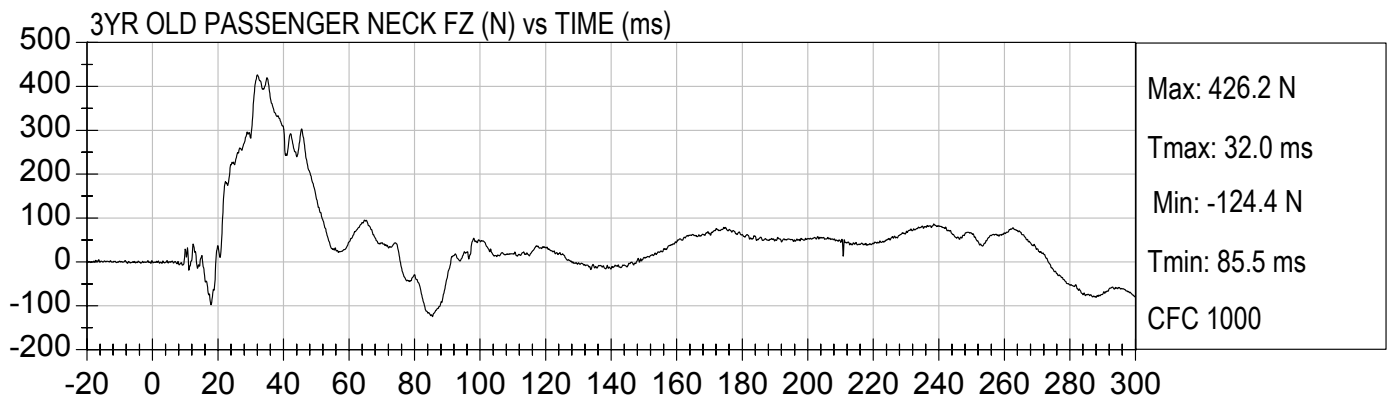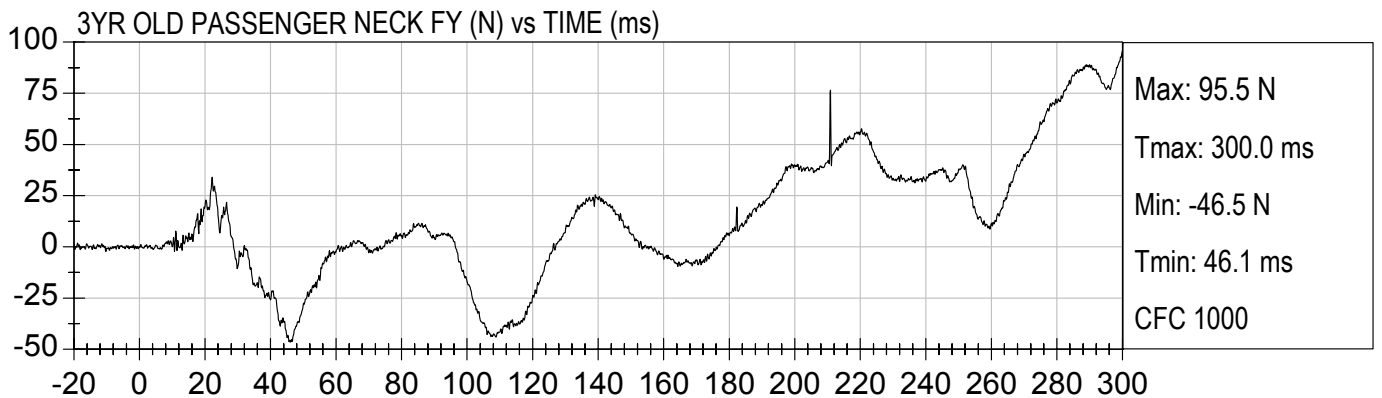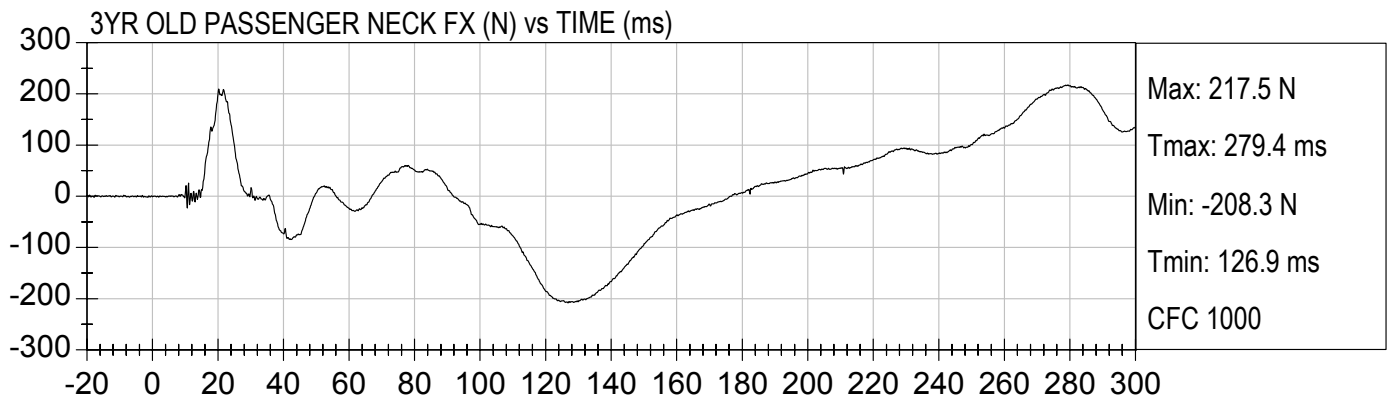





3YR OLD PASSENGER NECK MX (Nm) vs TIME (ms)

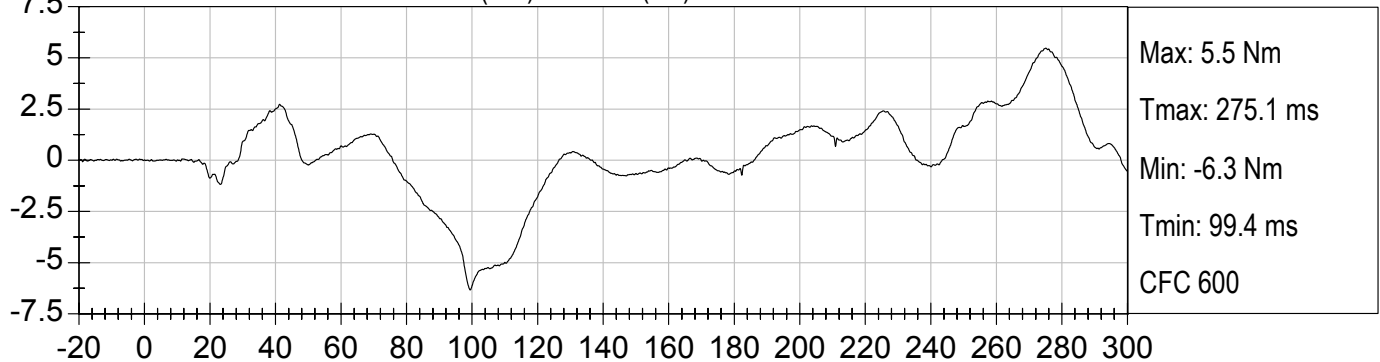


3YR OLD PASSENGER NECK MY (Nm) vs TIME (ms)




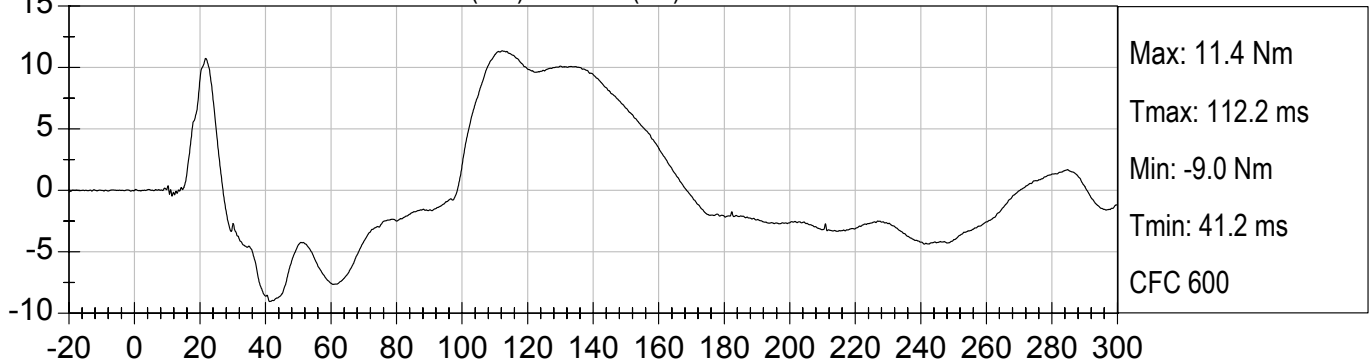






3YR OLD PASSENGER NECK MZ (Nm) vs TIME (ms)

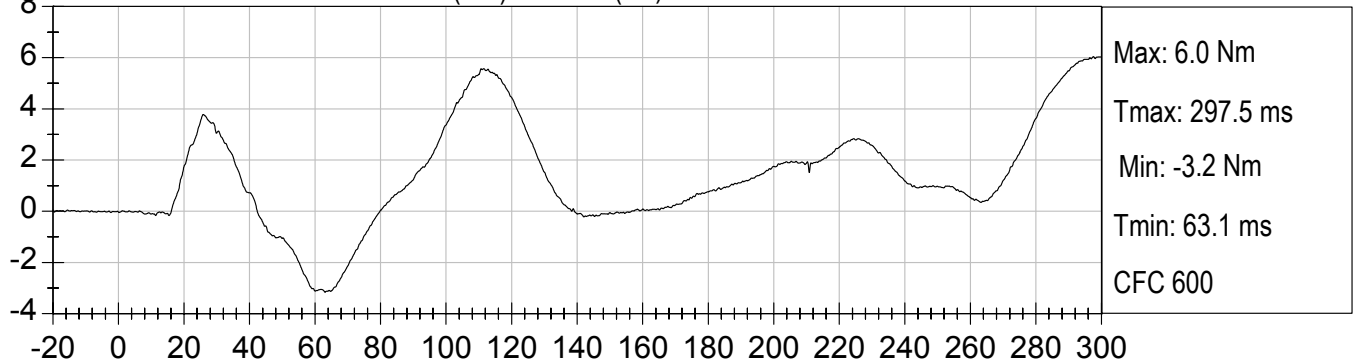

Pass. Occipital Condyle Moment (Nm) vs TIME (ms)

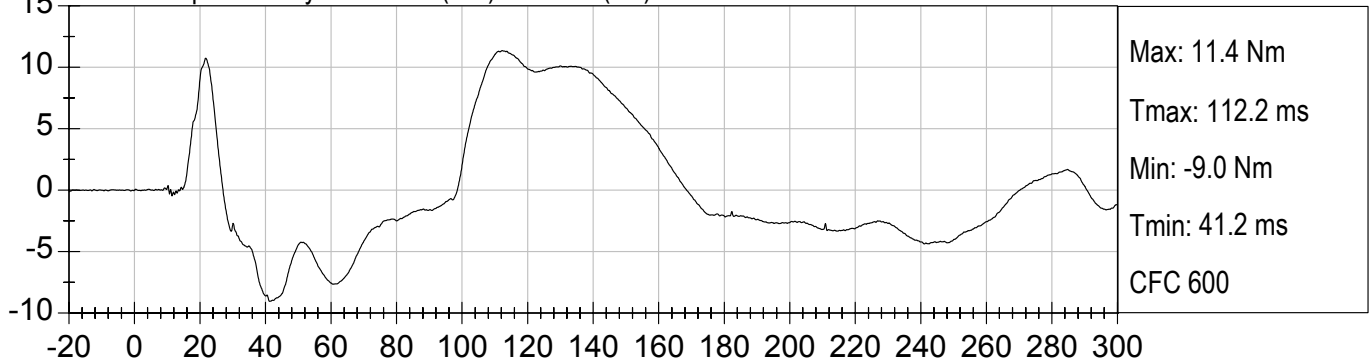


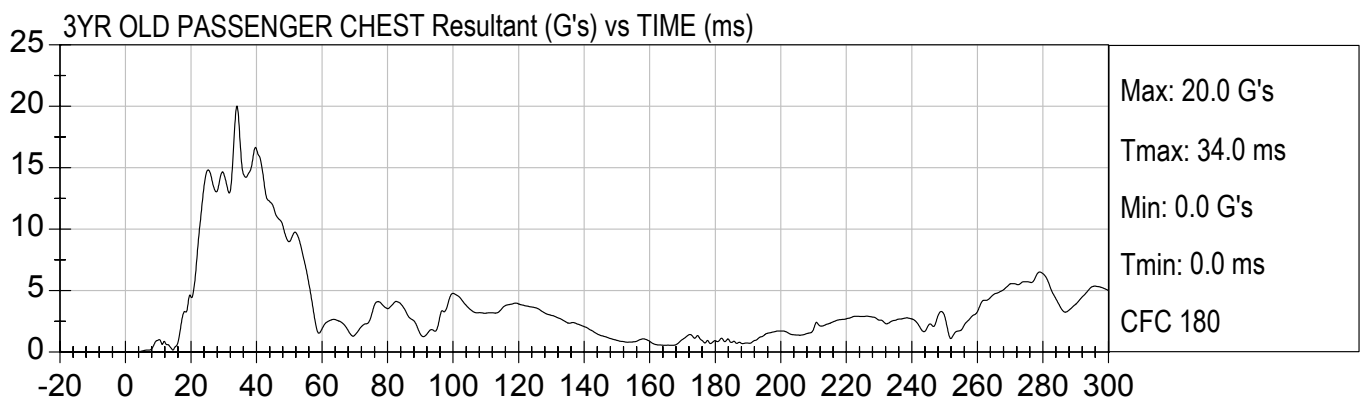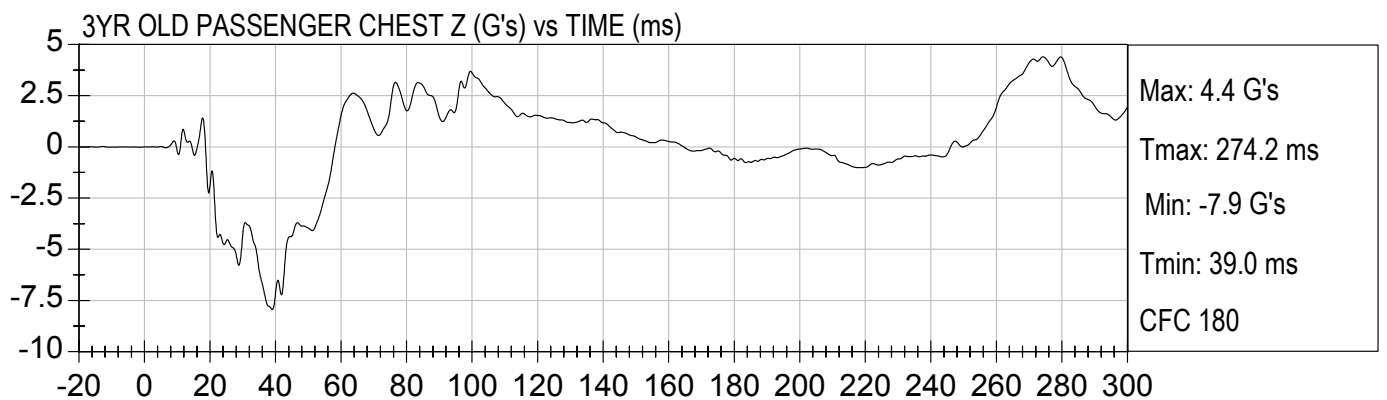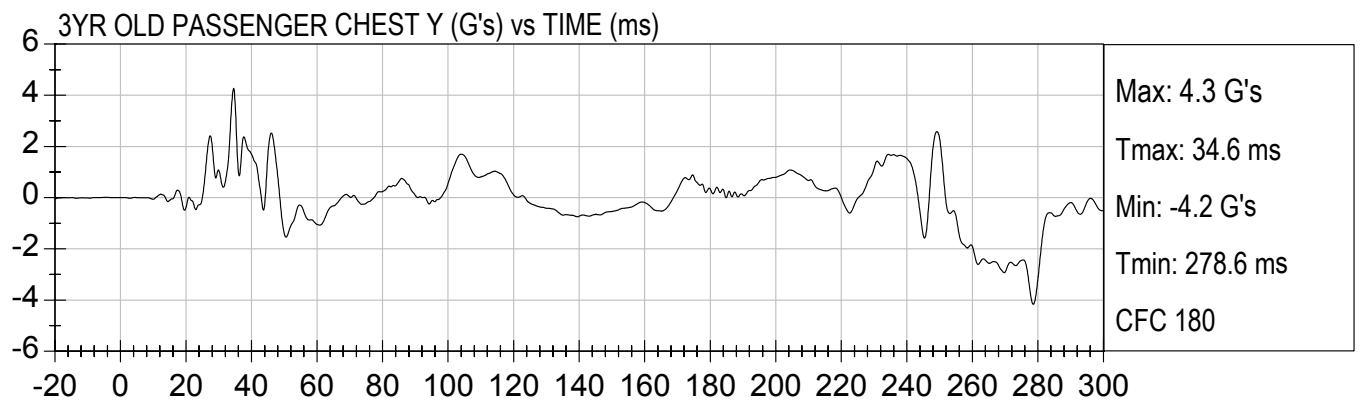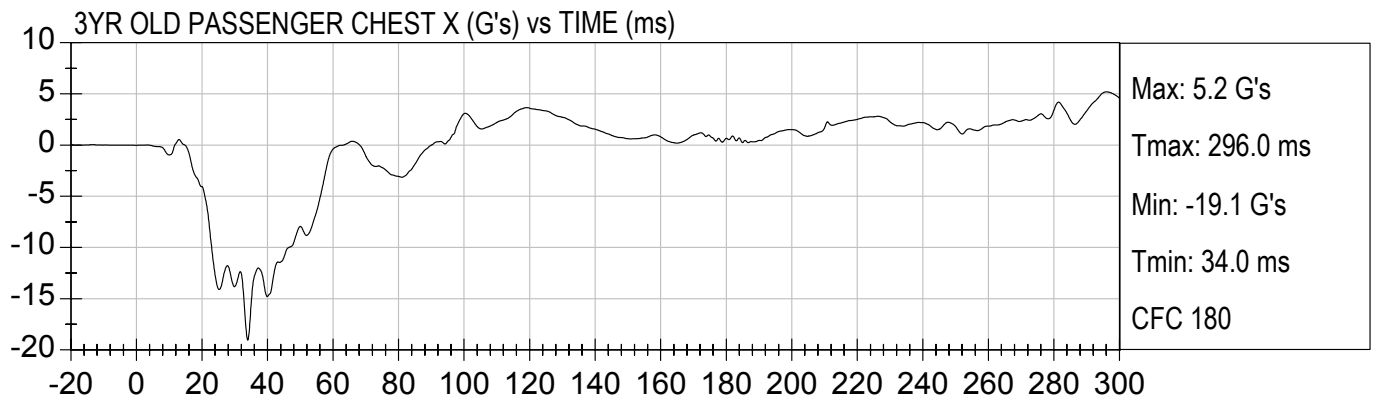

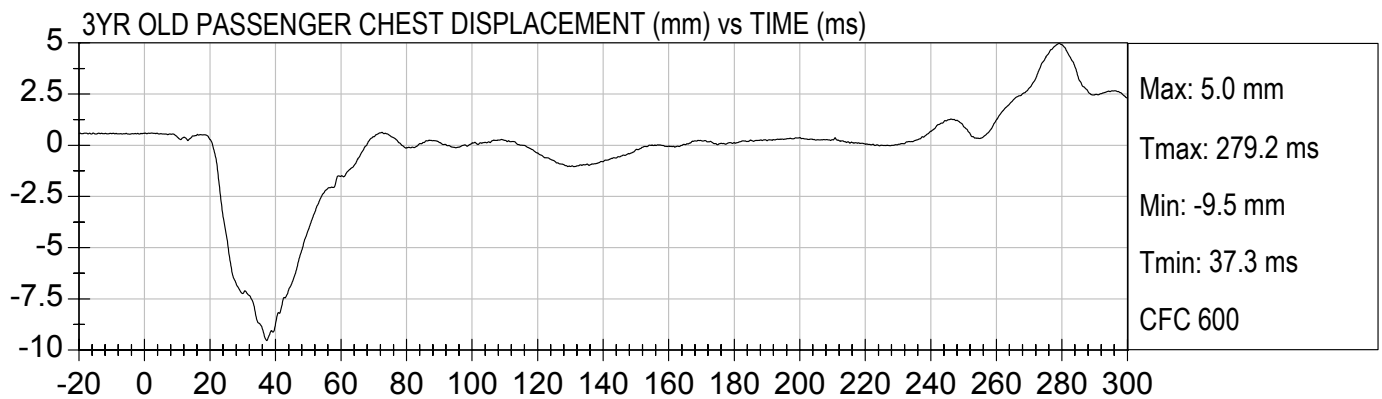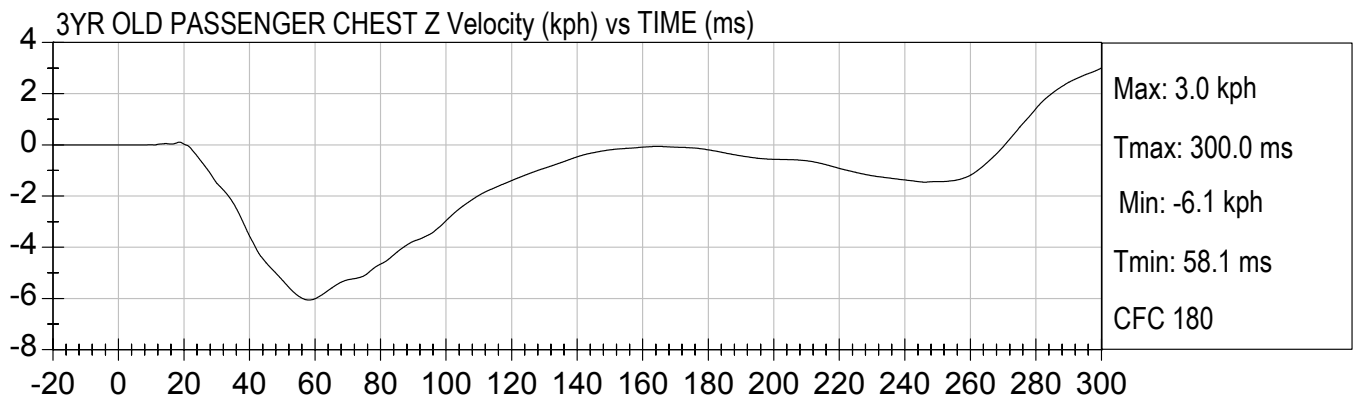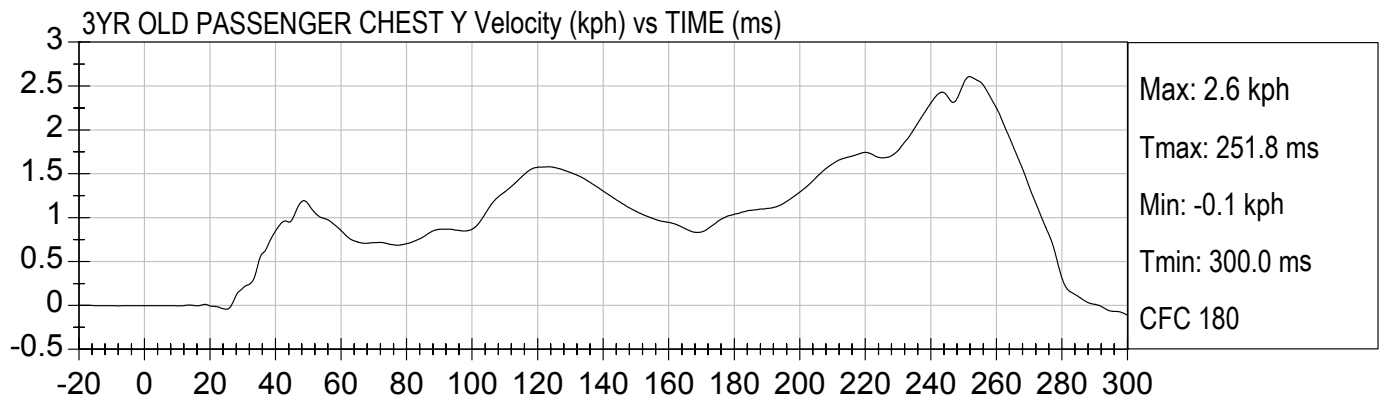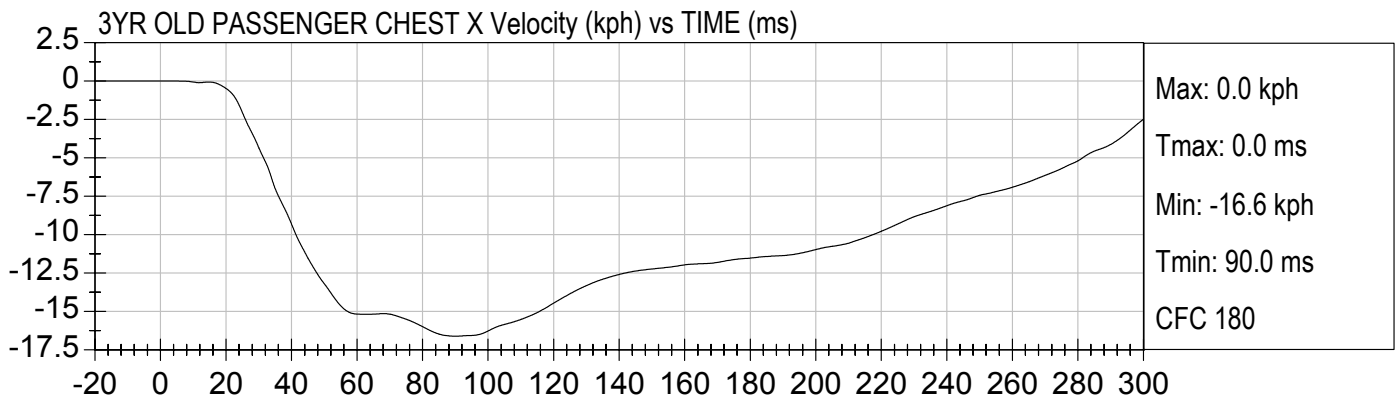





FIRE VOLTAGE #1 (Volts) vs TIME (ms)

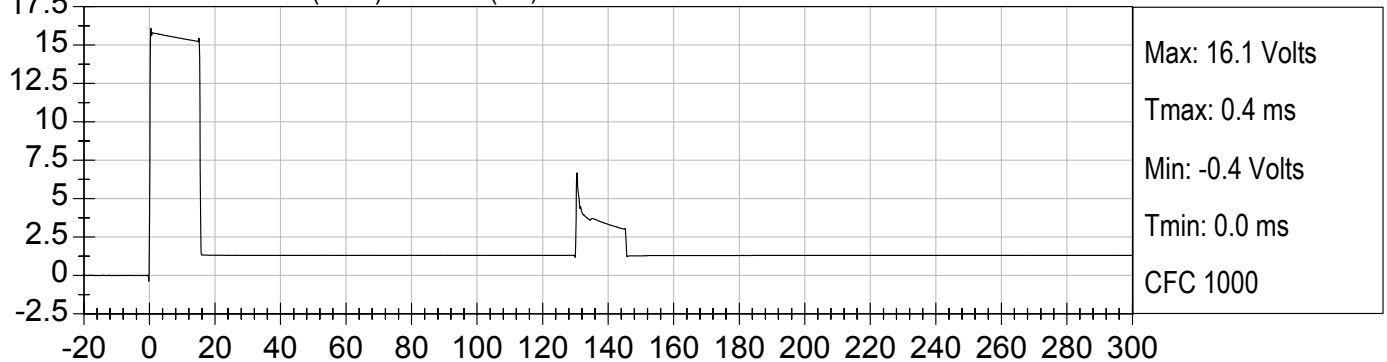


FIRE CURRENT #1 (Amps) vs TIME (ms)

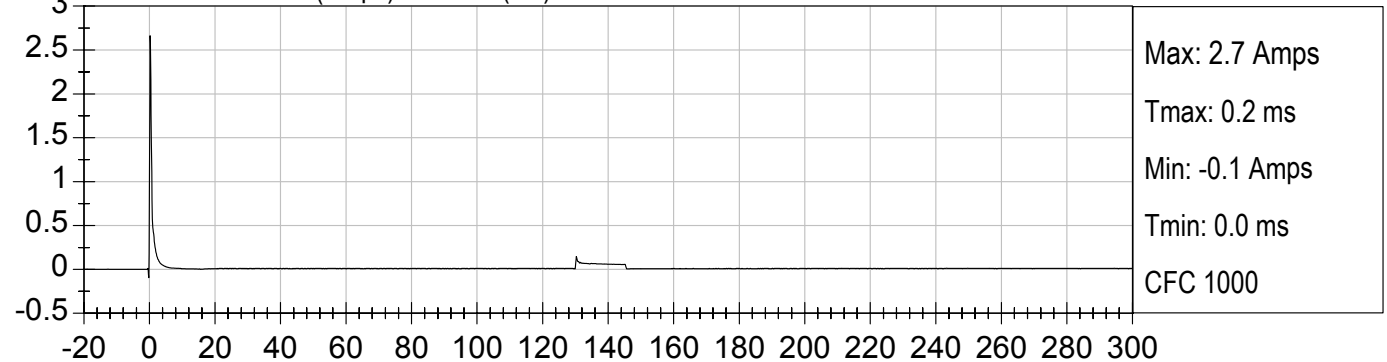

FIRE VOLTAGE #2 (Volts) vs TIME (ms)

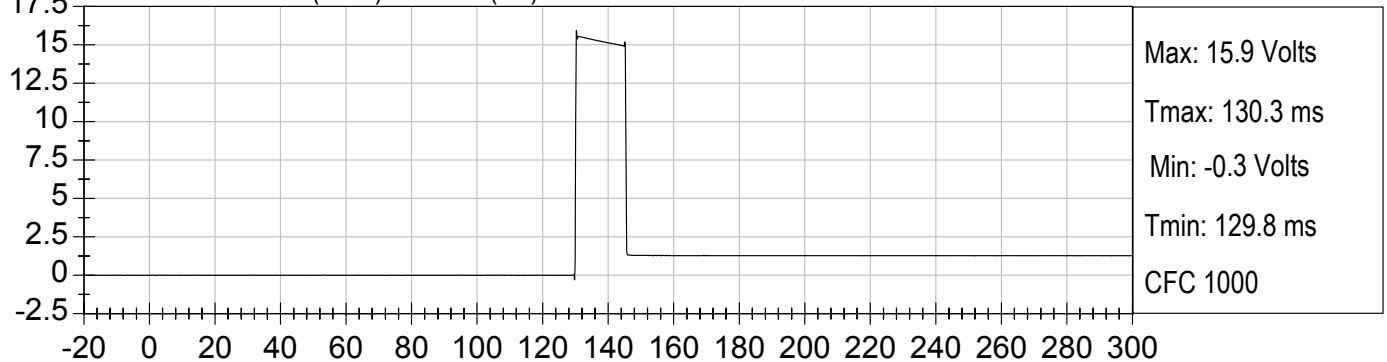


FIRE CURRENT #2 (Amps) vs TIME (ms)

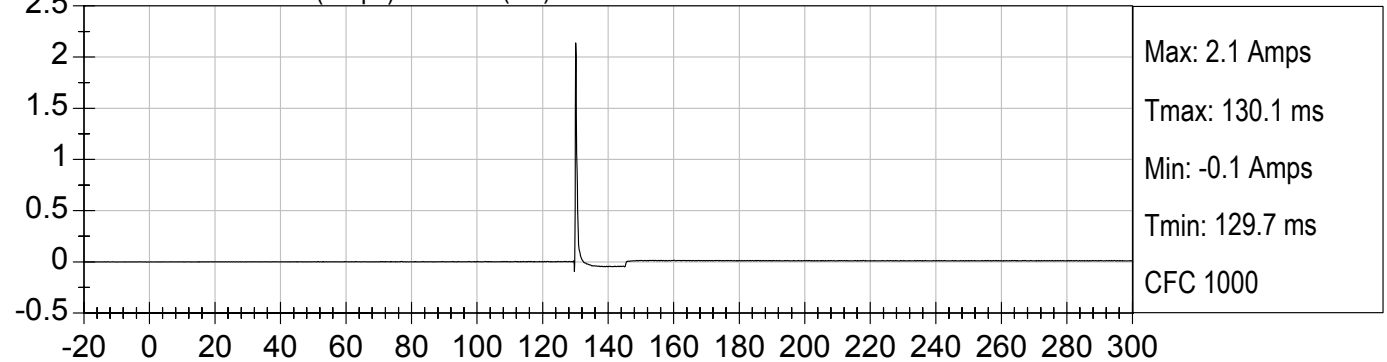





PASS. nij (NTF) () vs TIME SPECIAL CHS (ms)

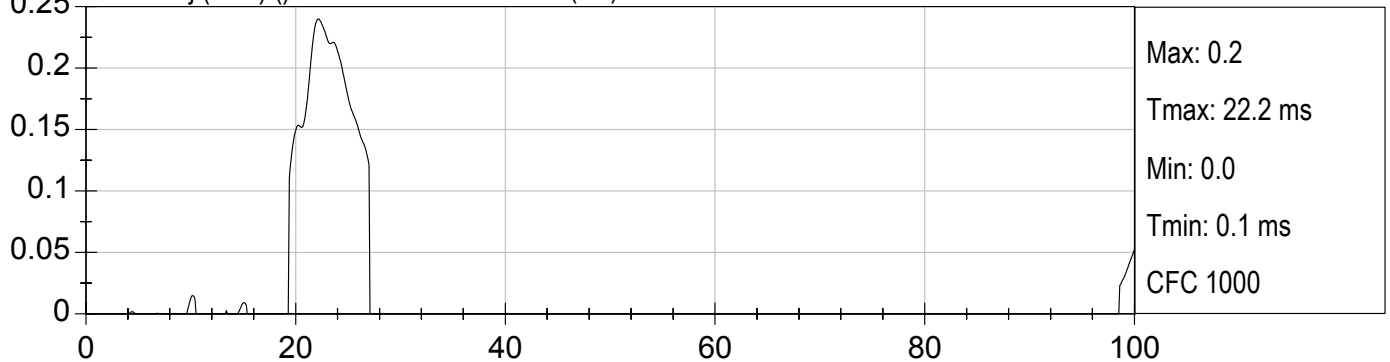


Pass. nij (NTE) () vs TIME SPECIAL CHS (ms)




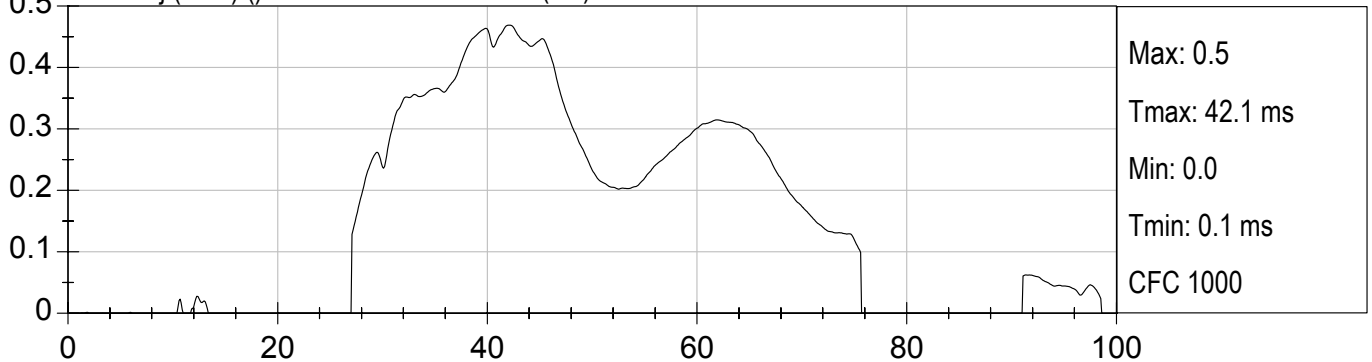





Pass. nij (NCF) () vs TIME SPECIAL CHS (ms)

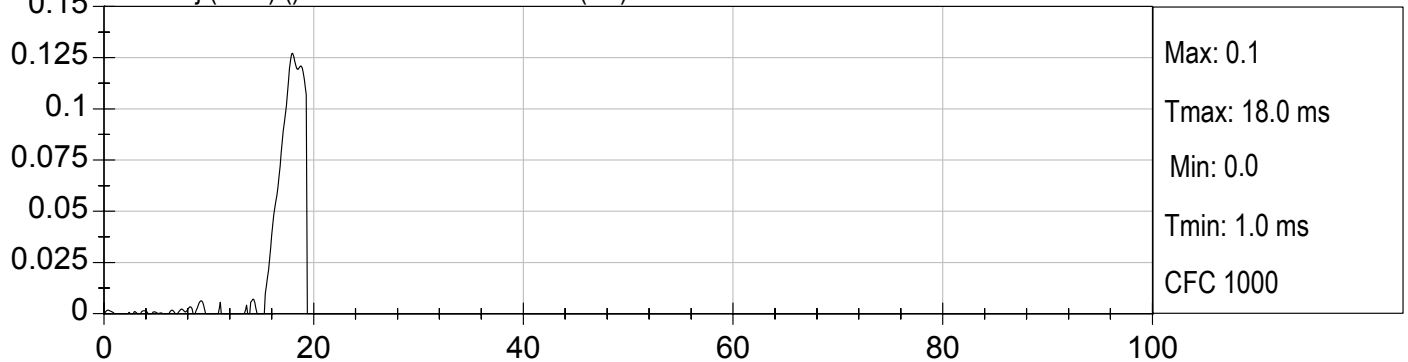

Pass. nij (NCE) () vs TIME SPECIAL CHS (ms)

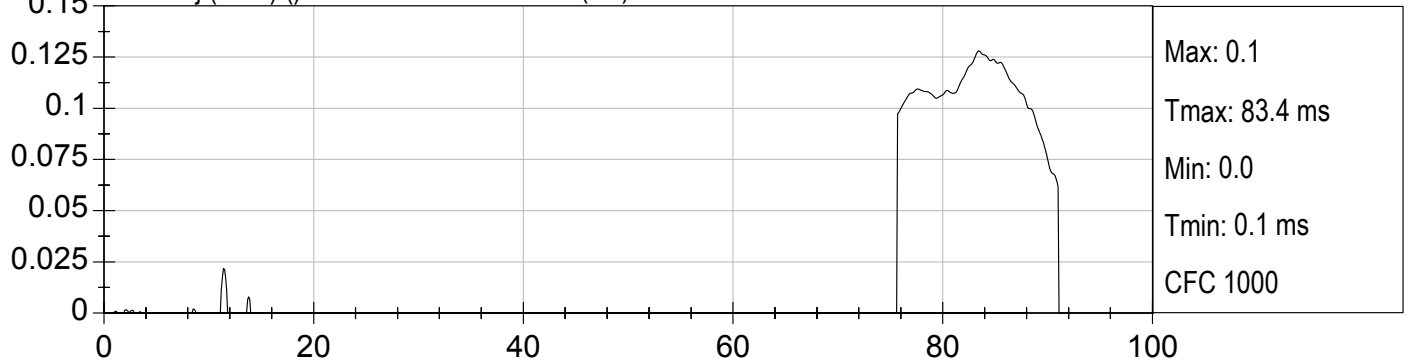


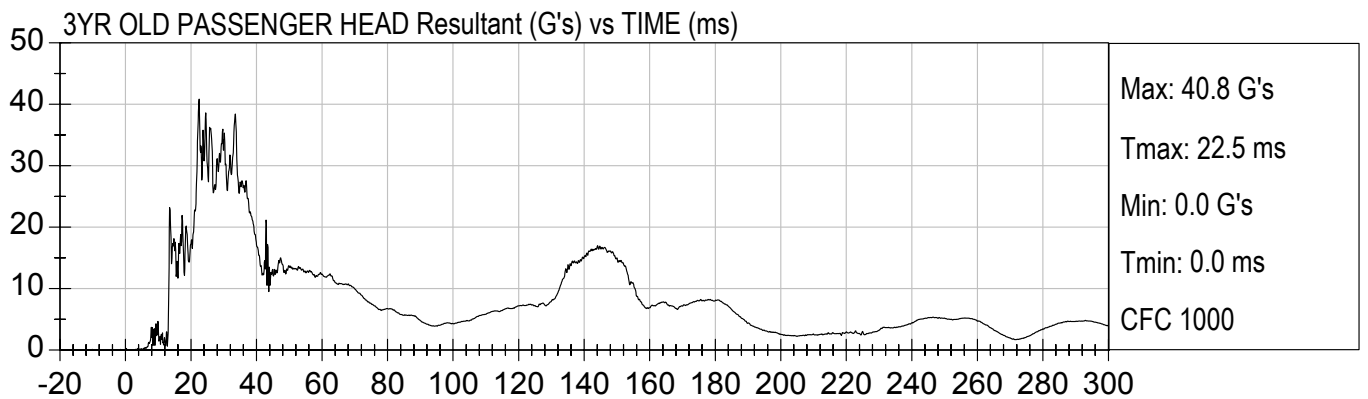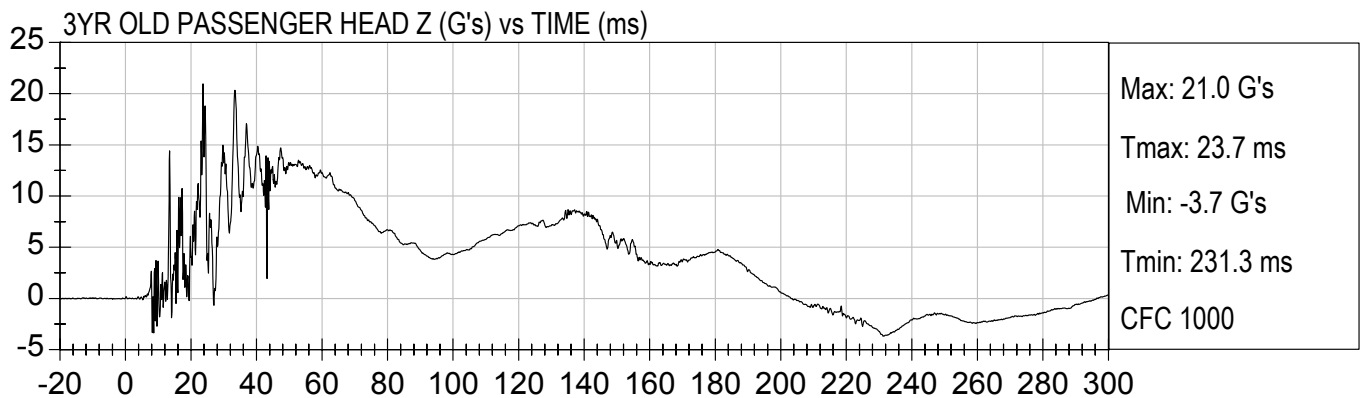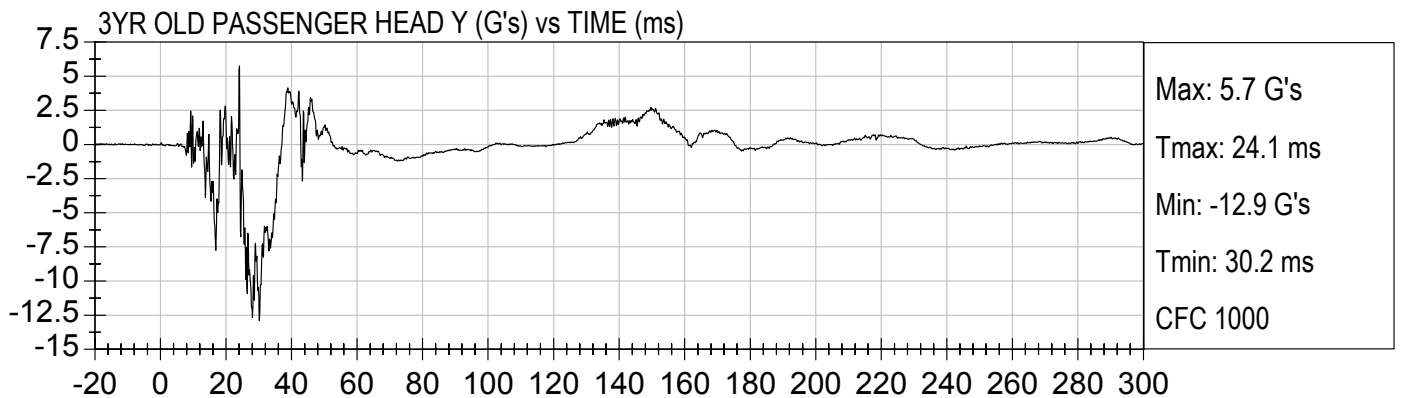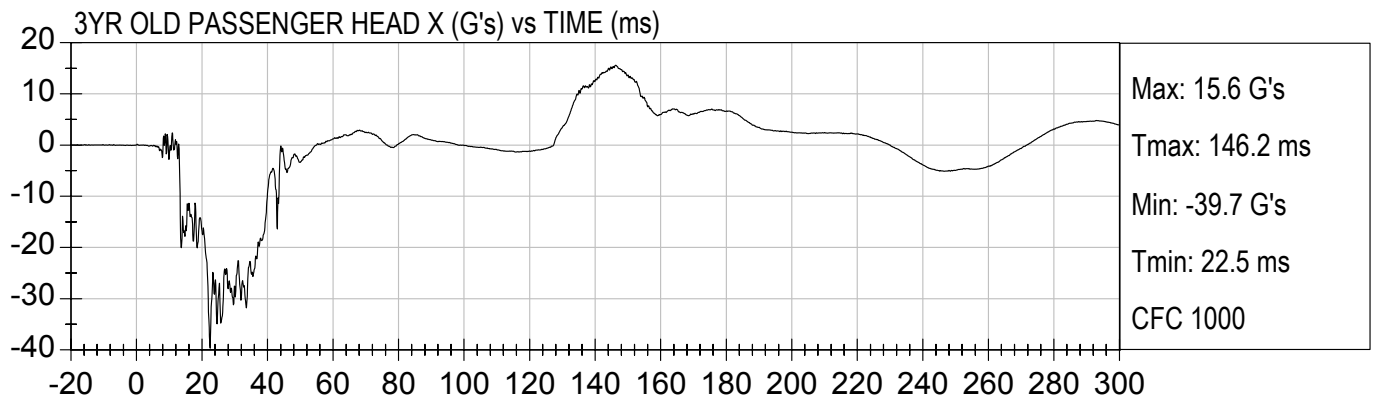

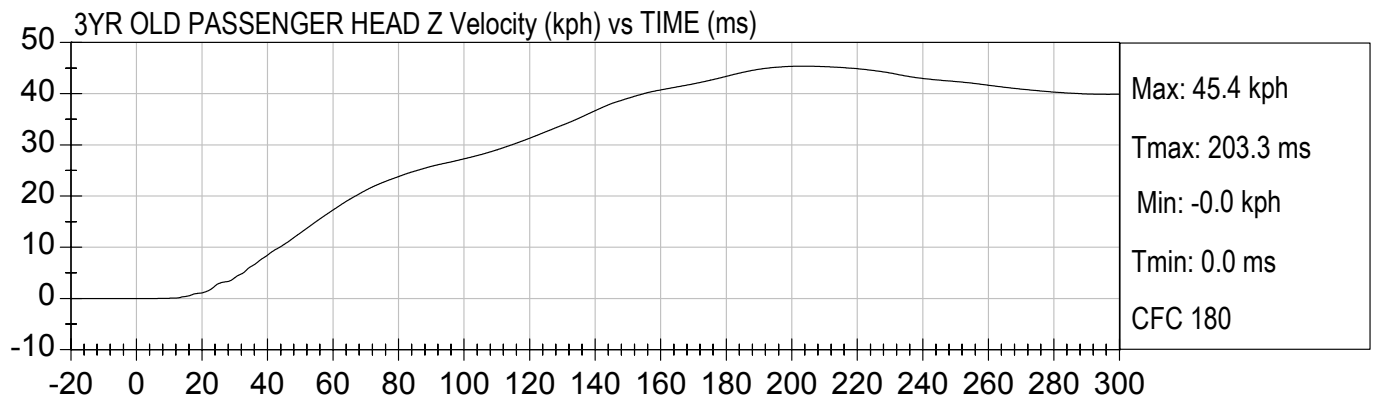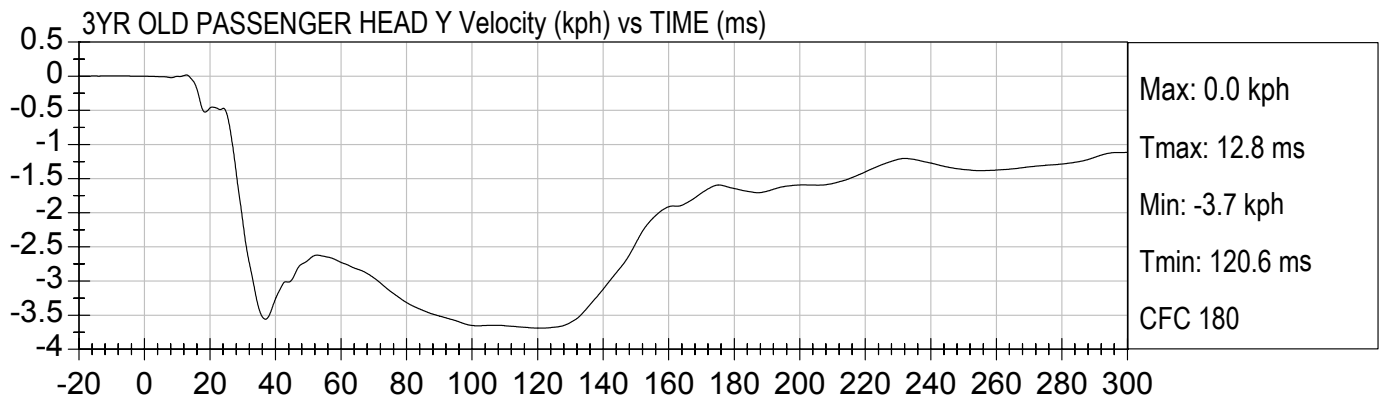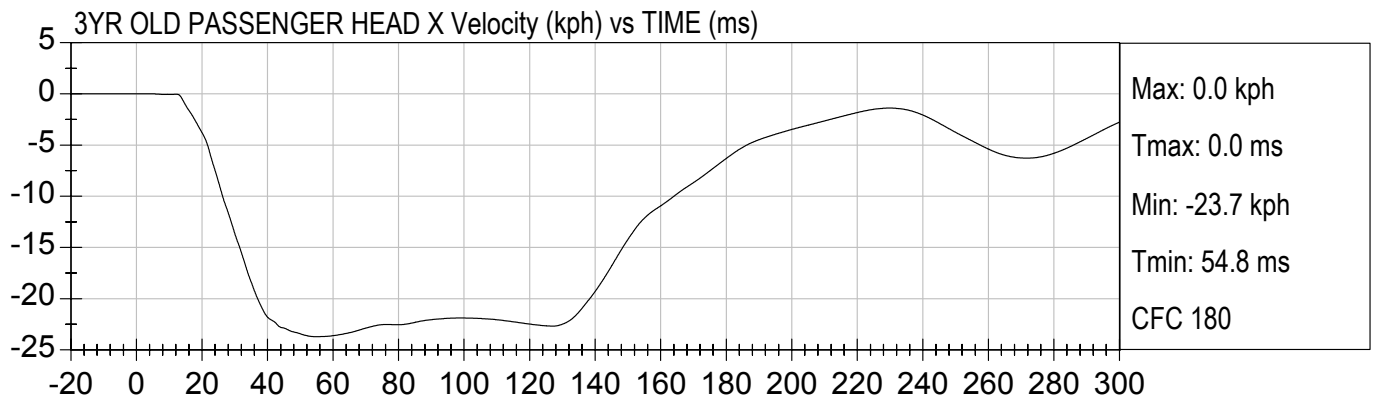





3YR OLD PASSENGER NECK FX (N) vs TIME (ms)

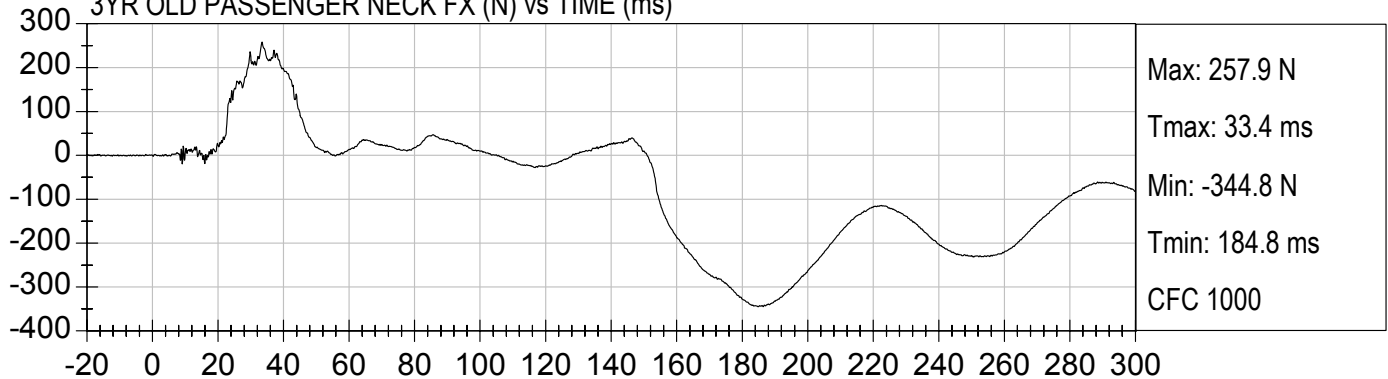


3YR OLD PASSENGER NECK FY (N) vs TIME (ms)

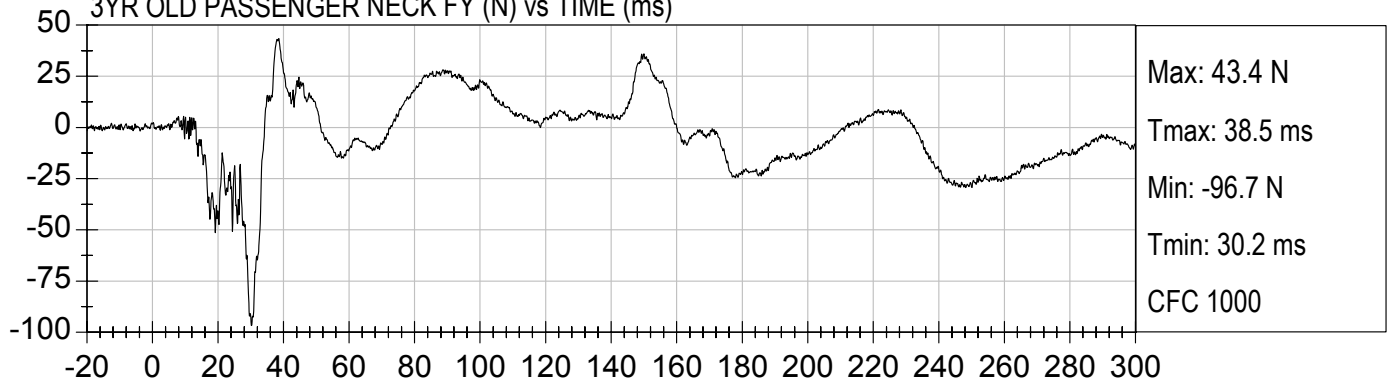

3YR OLD PASSENGER NECK FZ (N) vs TIME (ms)

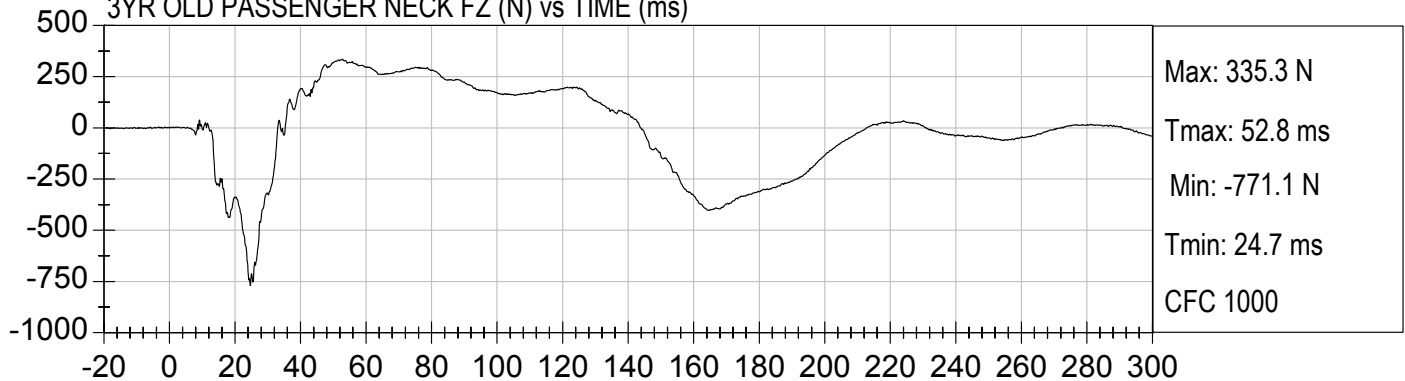


3YR OLD PASSENGER NECK FResultant (N) vs TIME (ms)

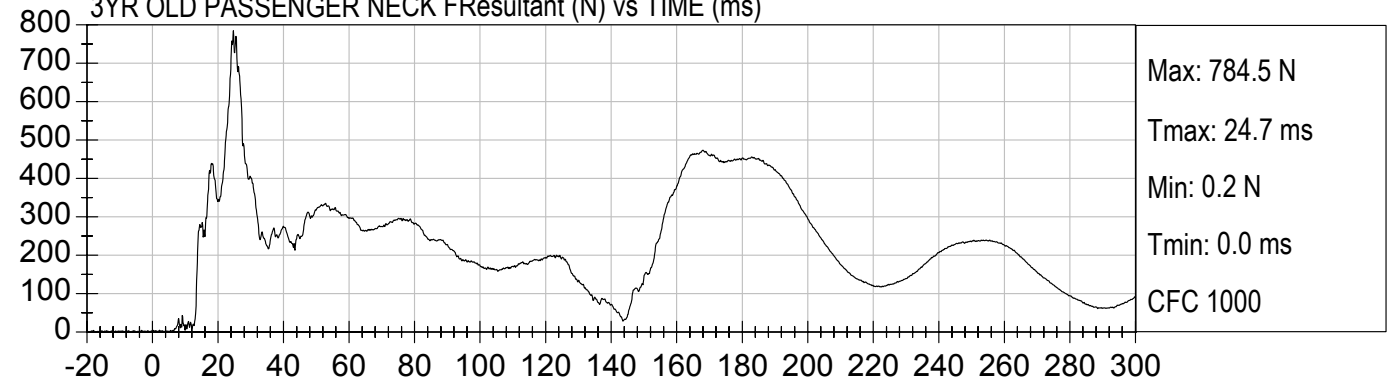





3YR OLD PASSENGER NECK MX (Nm) vs TIME (ms)

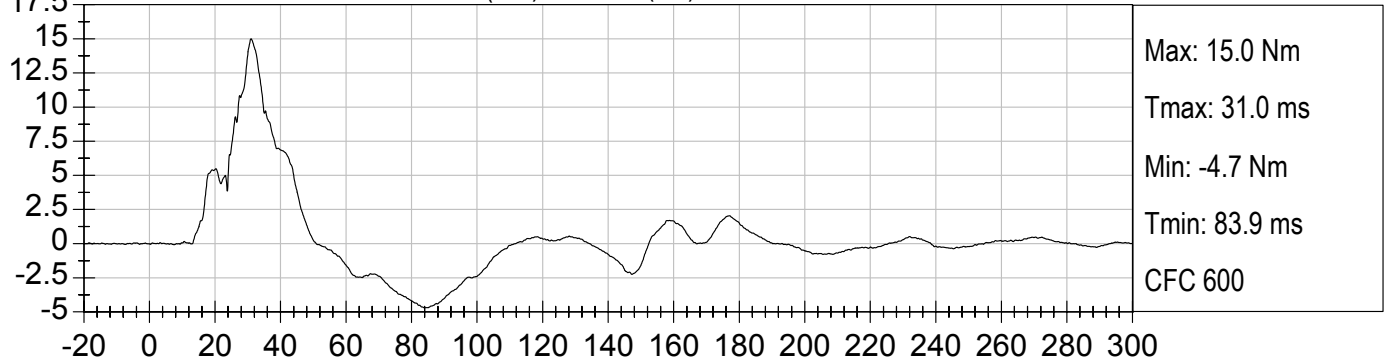


3YR OLD PASSENGER NECK MY (Nm) vs TIME (ms)

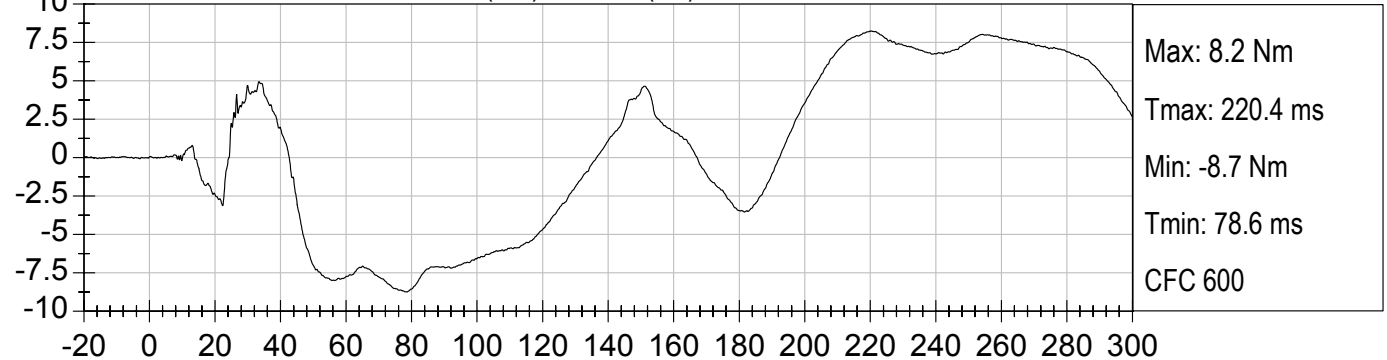

3YR OLD PASSENGER NECK MZ (Nm) vs TIME (ms)

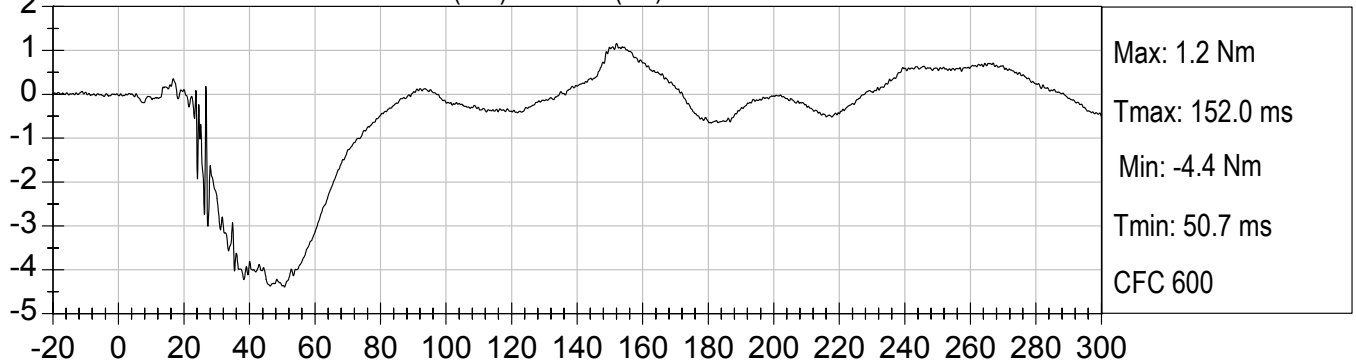


Pass. Occipital Condyle Moment (Nm) vs TIME (ms)

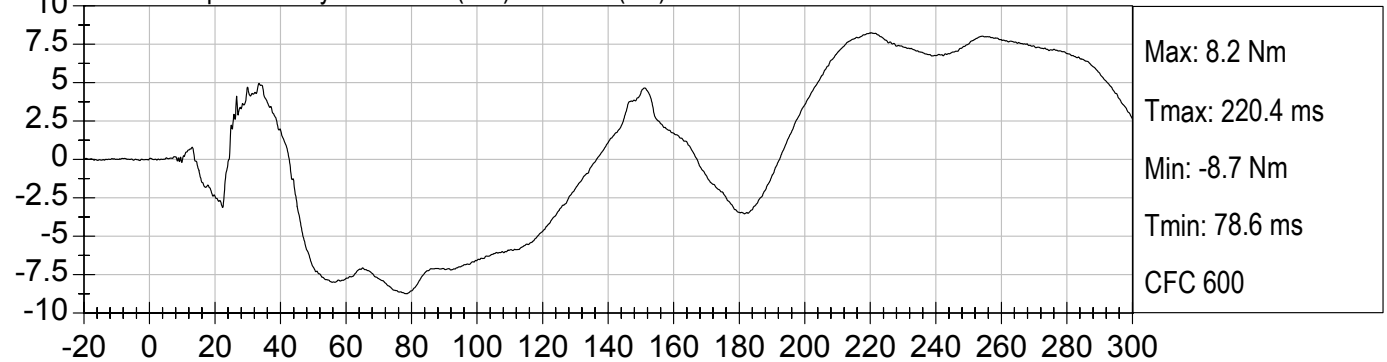





3YR OLD PASSENGER CHEST X (G's) vs TIME (ms)

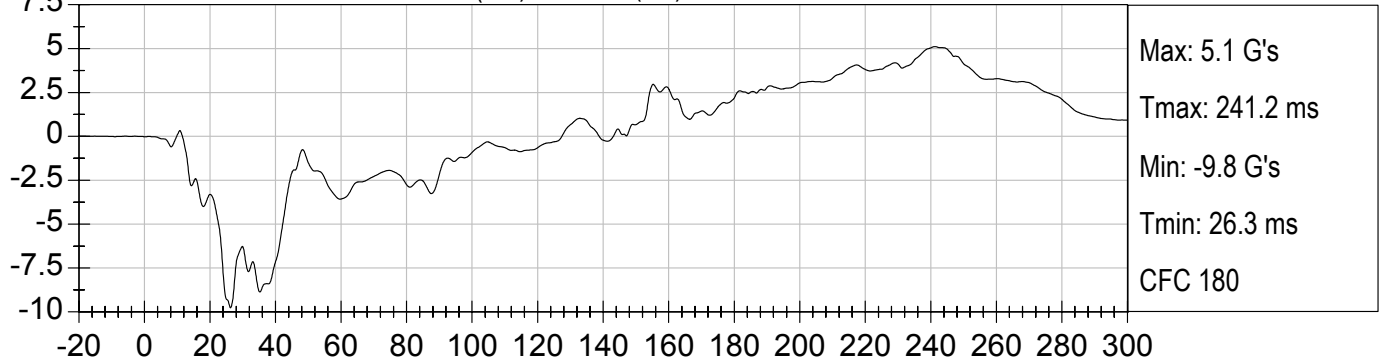


3YR OLD PASSENGER CHEST Y (G's) vs TIME (ms)




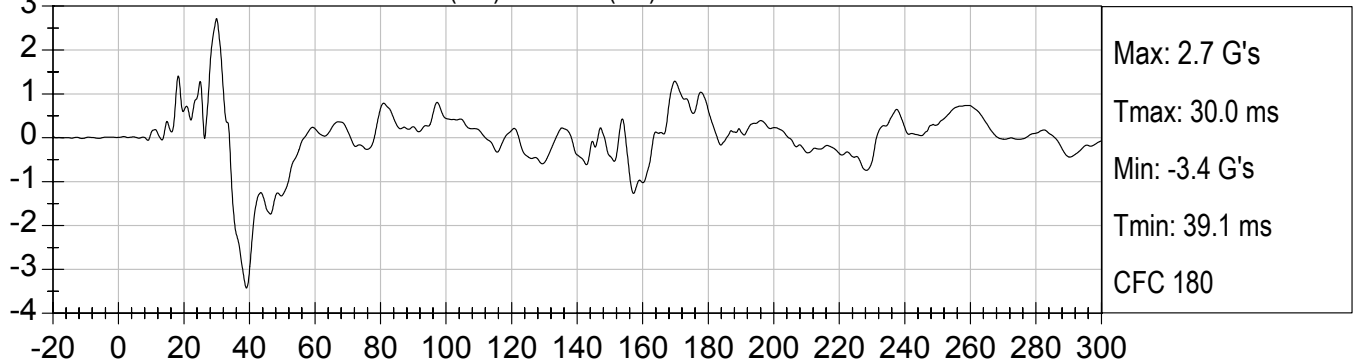


3YR OLD PASSENGER CHEST Z (G's) vs TIME (ms)

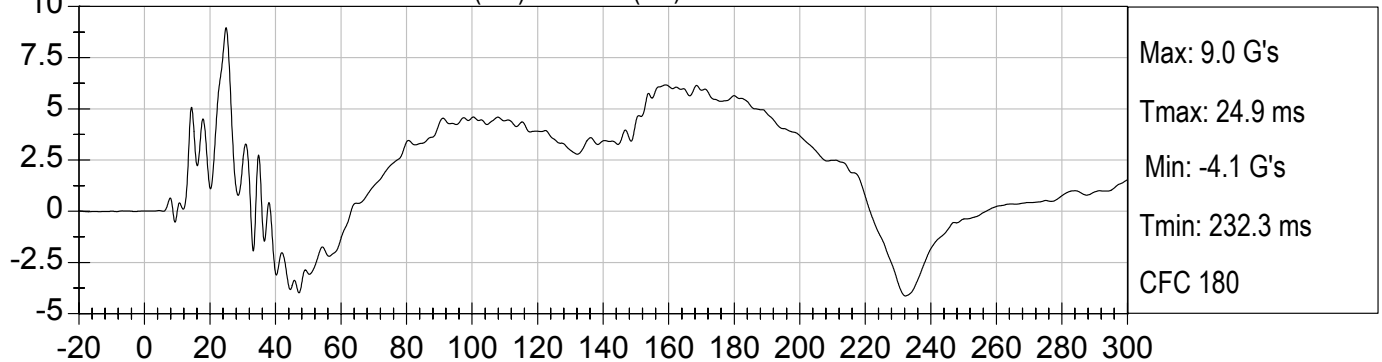


3YR OLD PASSENGER CHEST Resultant (G's) vs TIME (ms)

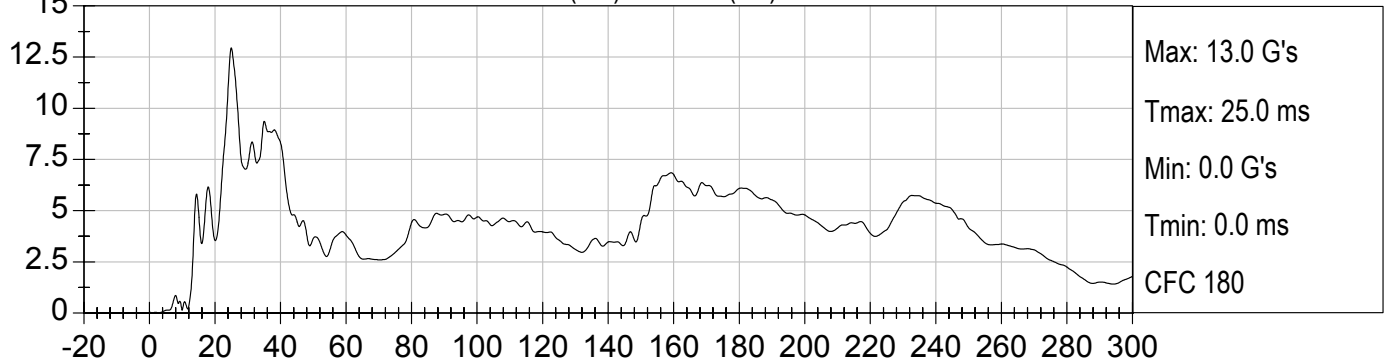

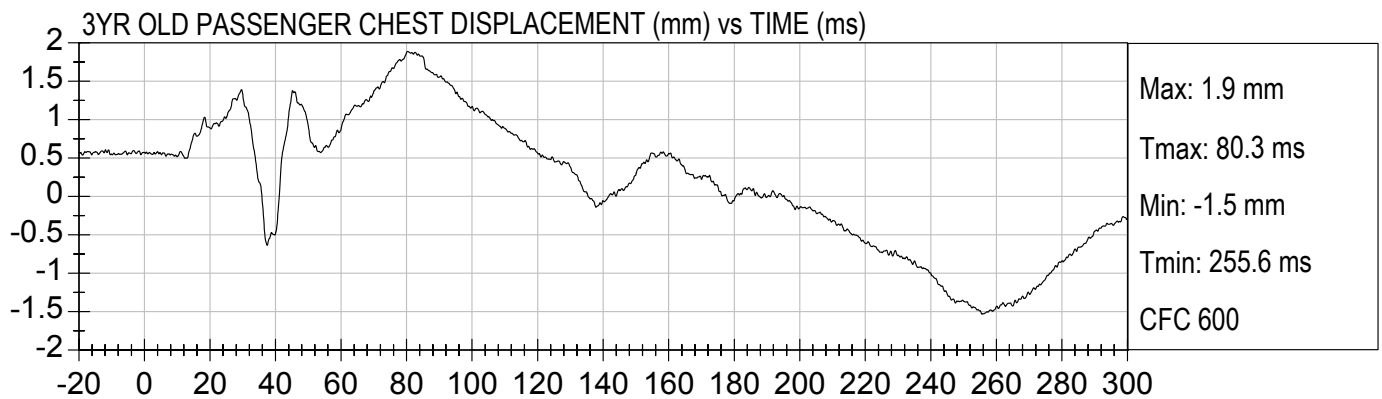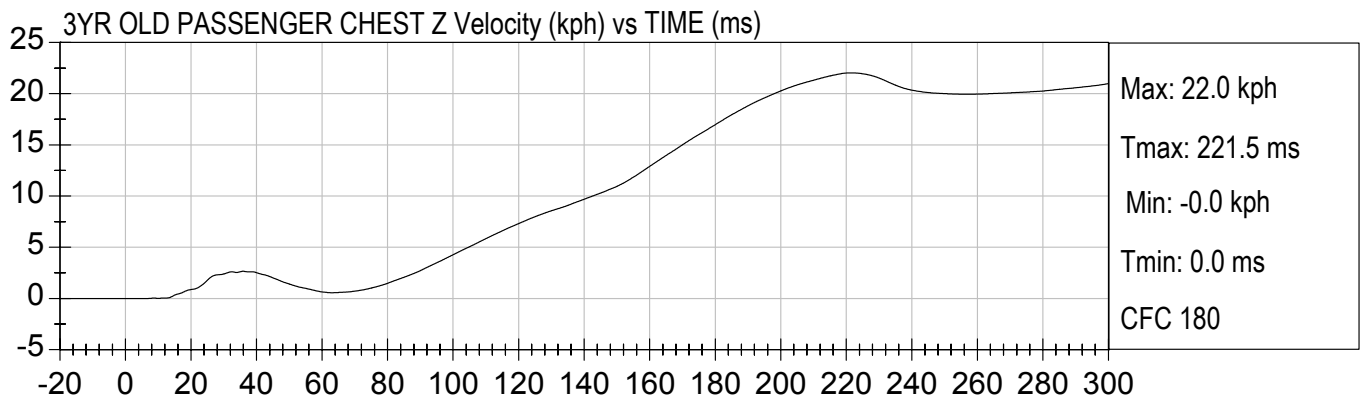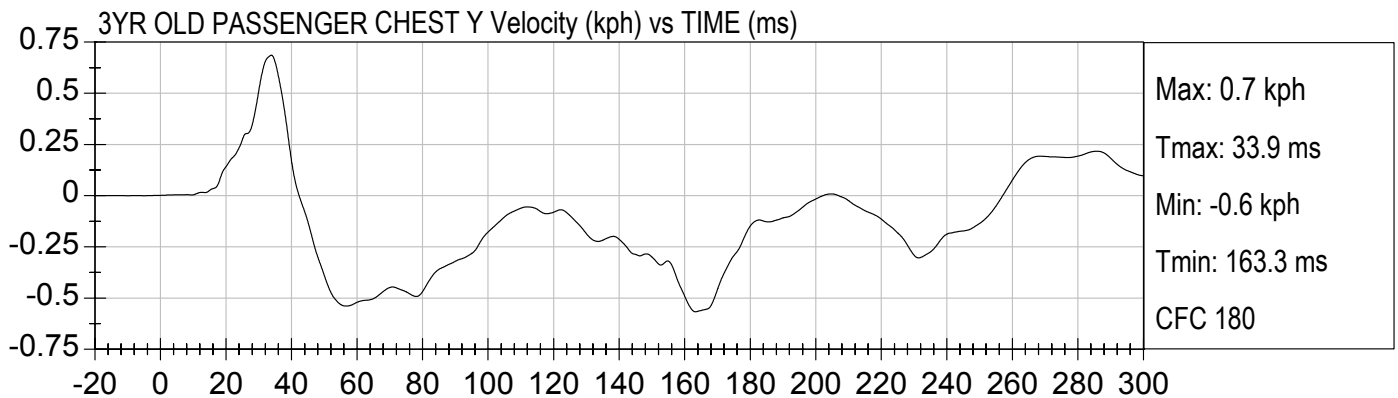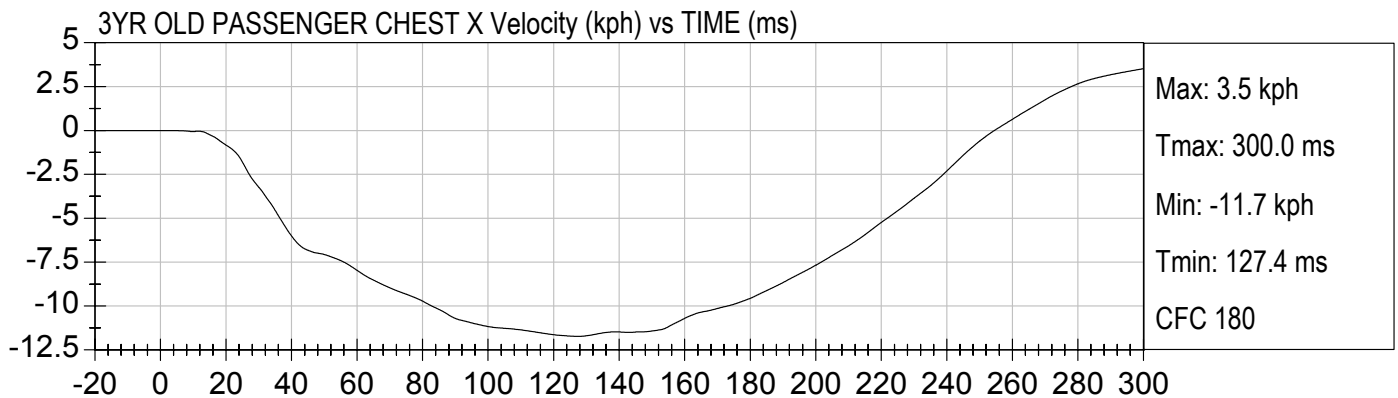





FIRE VOLTAGE #1 (Volts) vs TIME (ms)

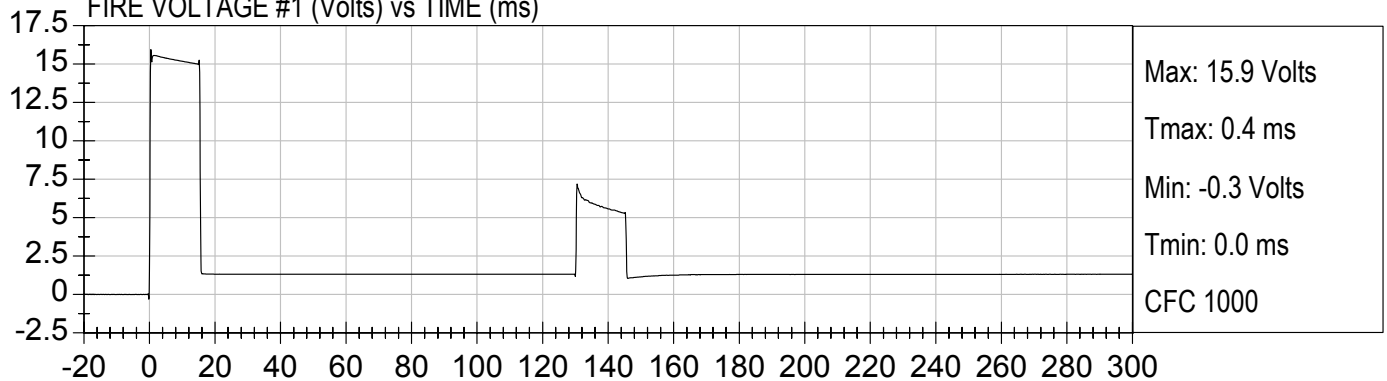


FIRE CURRENT #1 (Amps) vs TIME (ms)

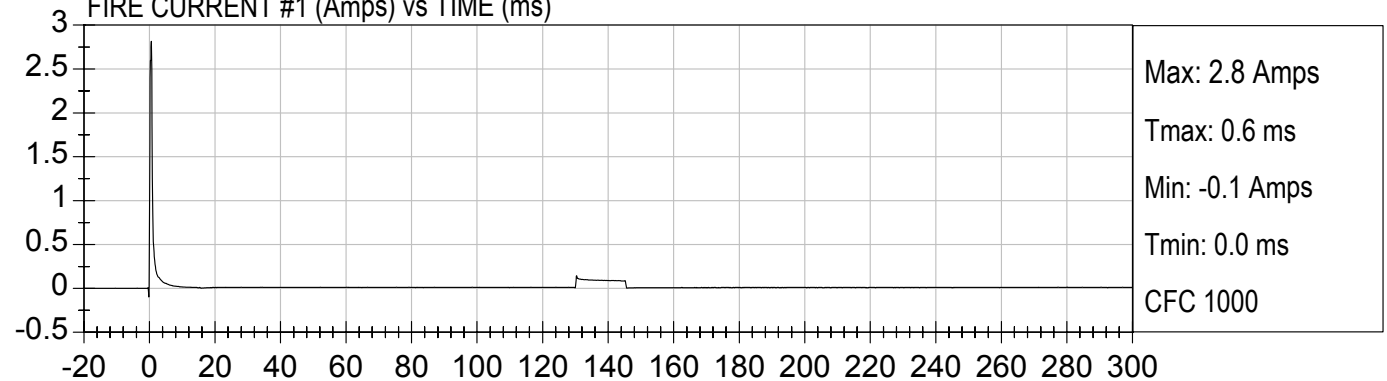

FIRE VOLTAGE #2 (Volts) vs TIME (ms)

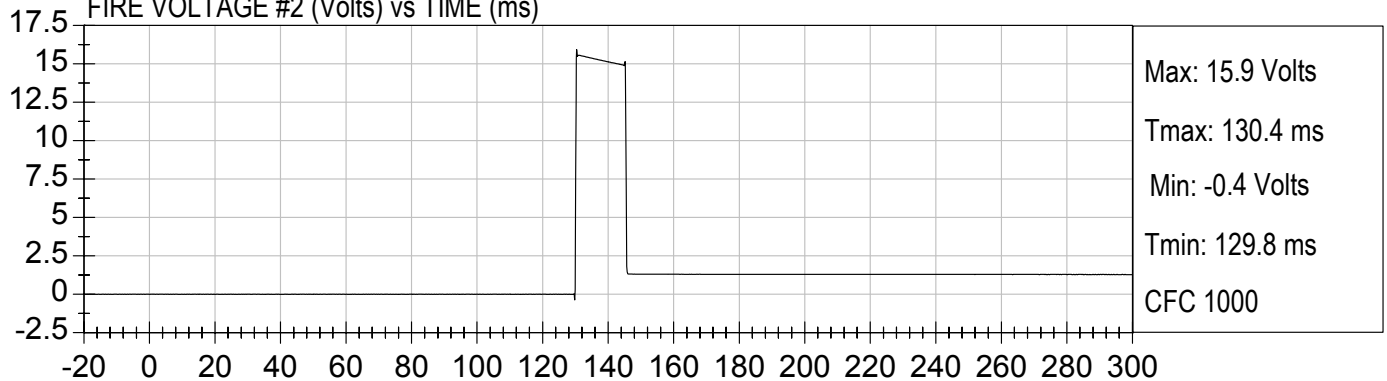


FIRE CURRENT #2 (Amps) vs TIME (ms)

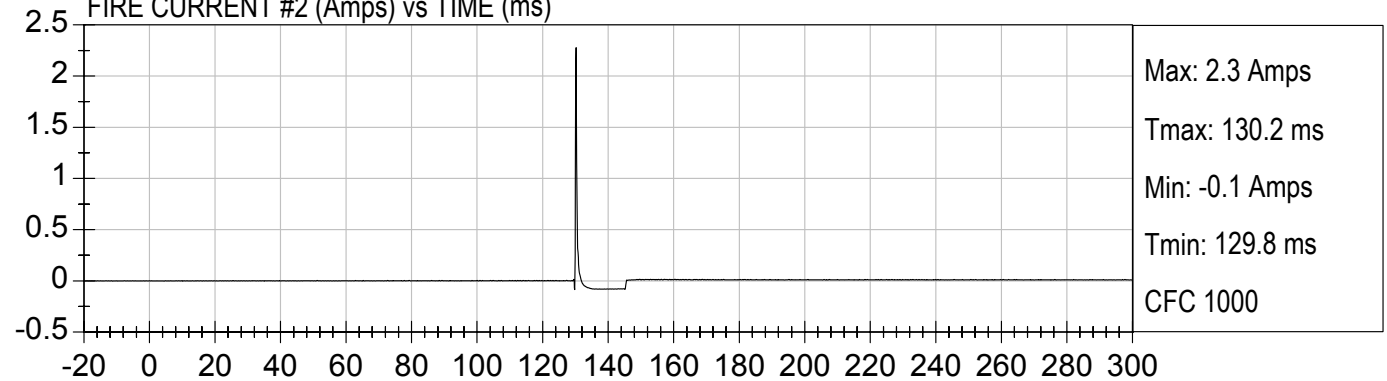





PASS. nij (NTF) () vs TIME SPECIAL CHS (ms)

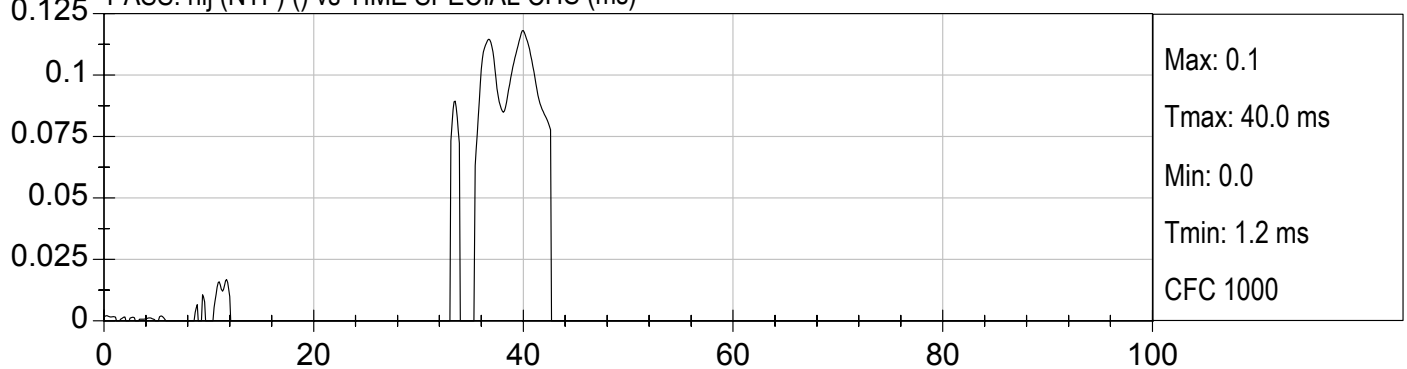


Pass. nij (NTE) () vs TIME SPECIAL CHS (ms)

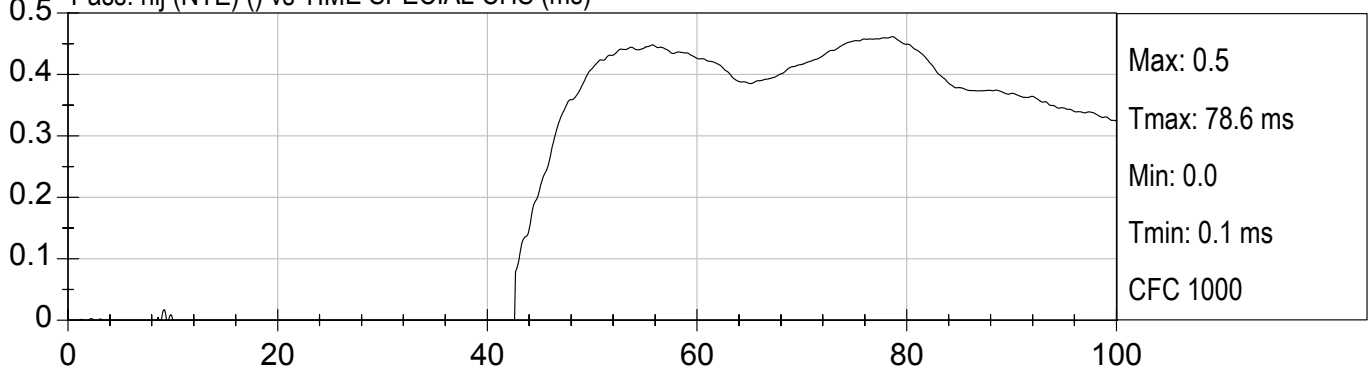

Pass. nij (NCF) () vs TIME SPECIAL CHS (ms)

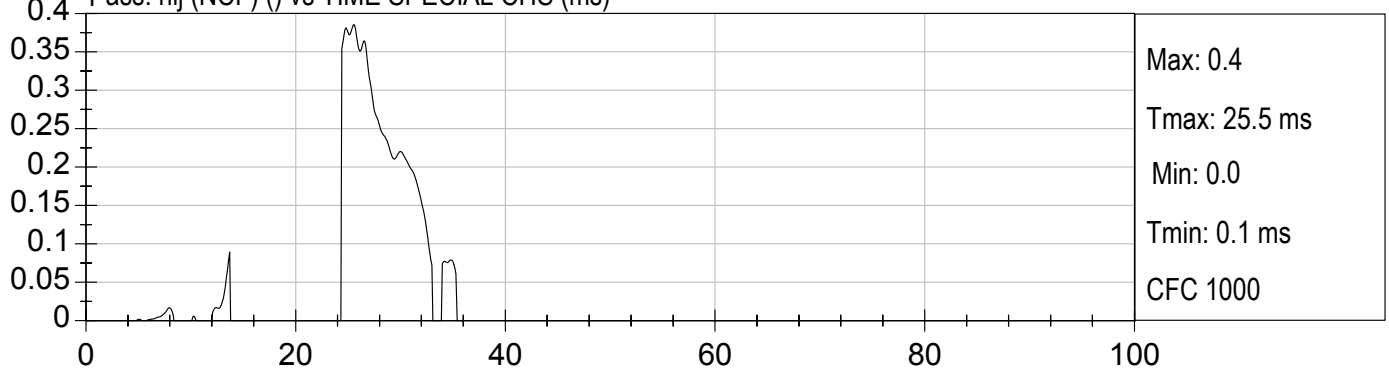


Pass. nij (NCE) () vs TIME SPECIAL CHS (ms)

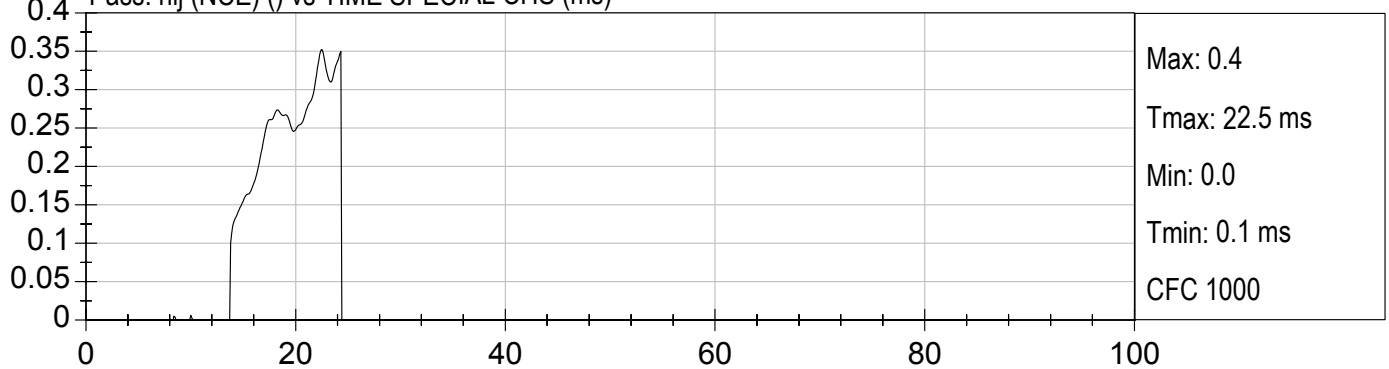





6YR OLD PASSENGER HEAD X (G's) vs TIME (ms)

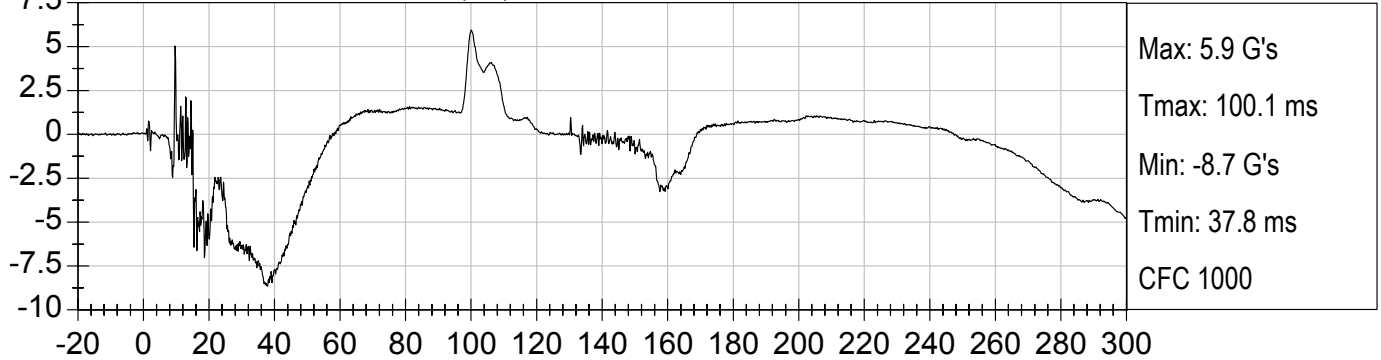


6YR OLD PASSENGER HEAD Y (G's) vs TIME (ms)

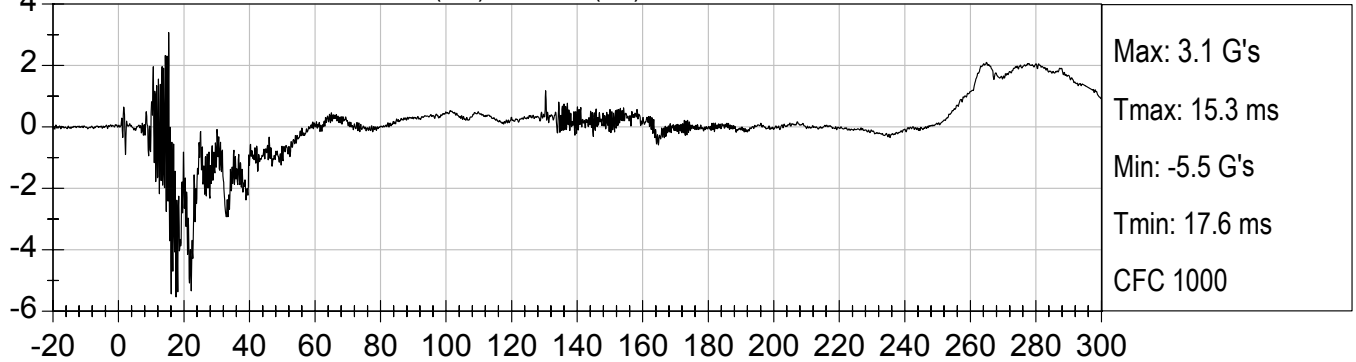

6YR OLD PASSENGER HEAD Z (G's) vs TIME (ms)

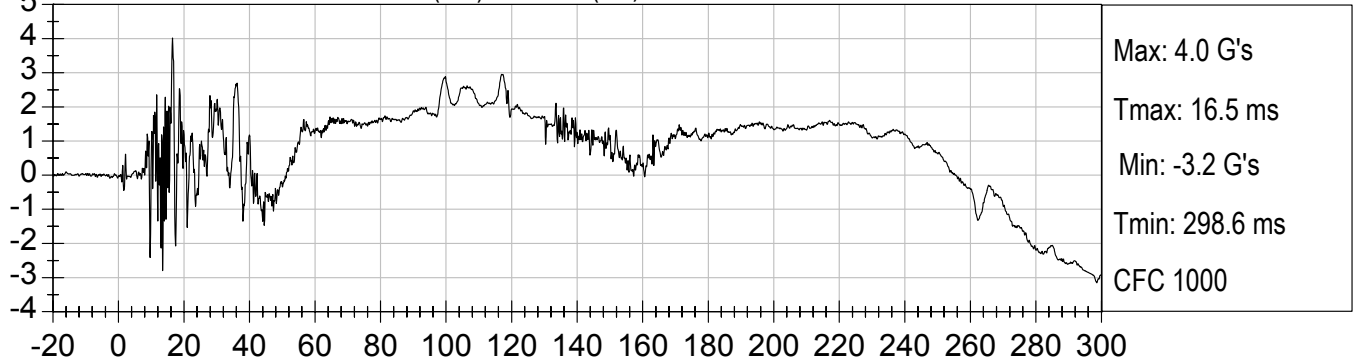


6YR OLD PASSENGER HEAD Resultant (G's) vs TIME (ms)

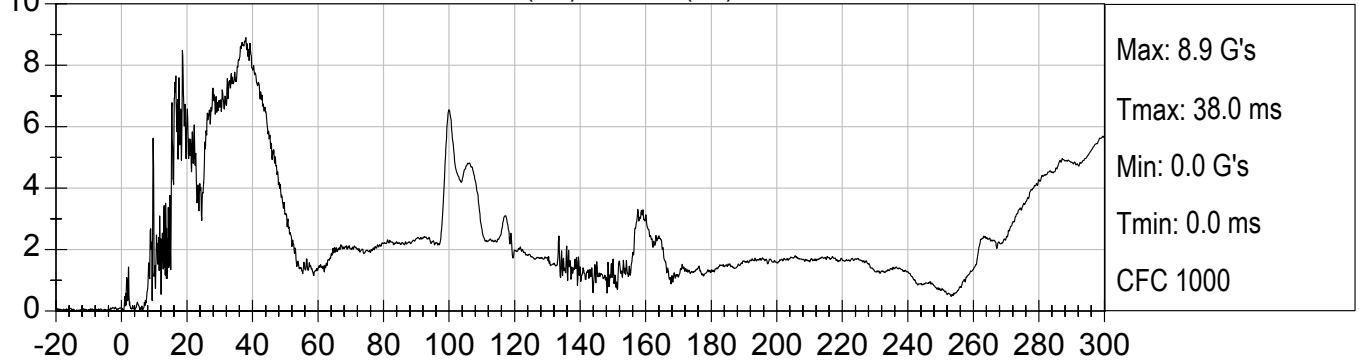





6YR OLD PASSENGER HEAD X Velocity (kph) vs TIME (ms)




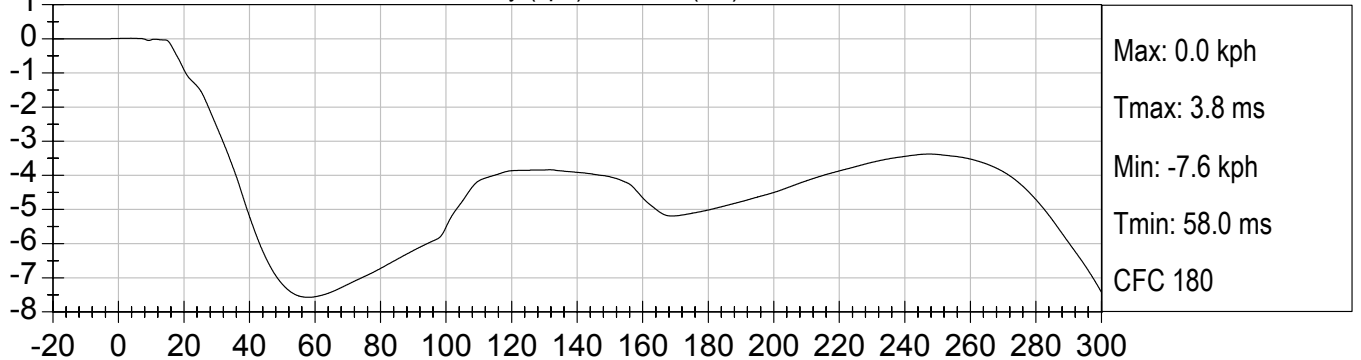


6YR OLD PASSENGER HEAD Y Velocity (kph) vs TIME (ms)

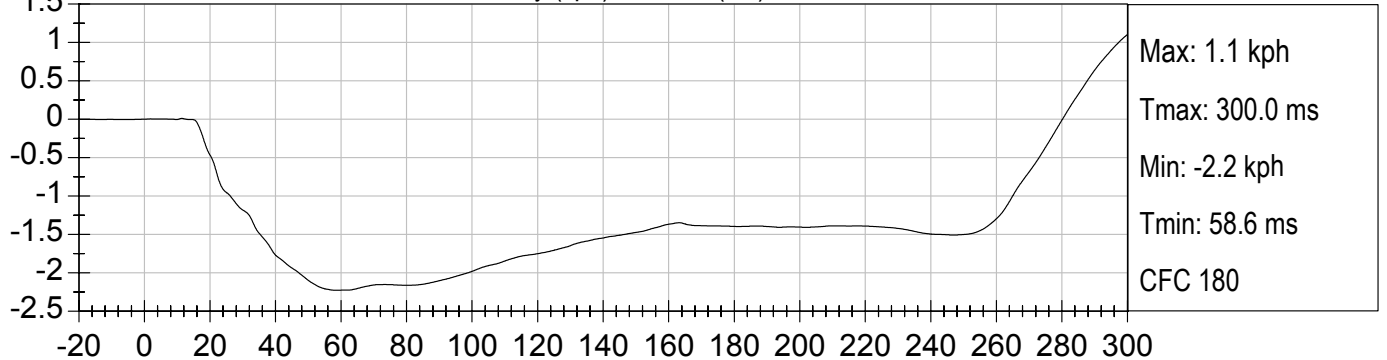


6YR OLD PASSENGER HEAD Z Velocity (kph) vs TIME (ms)

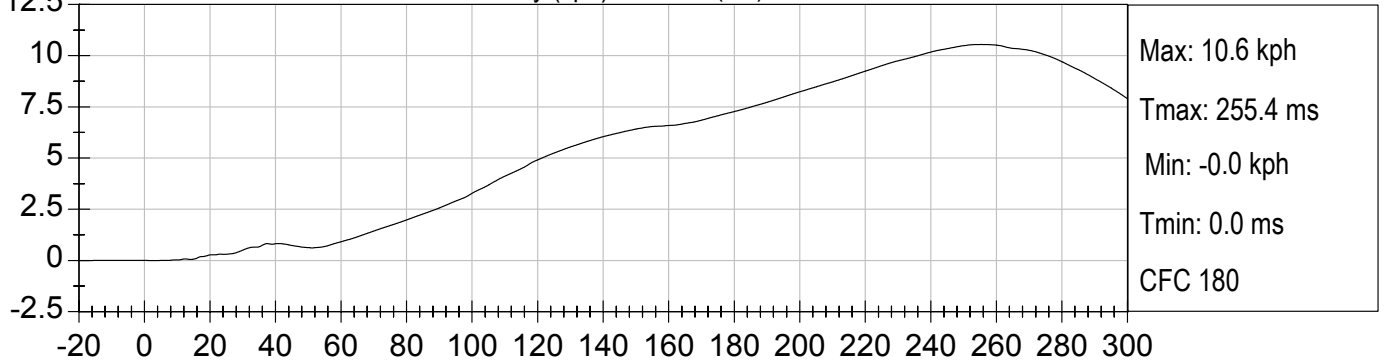

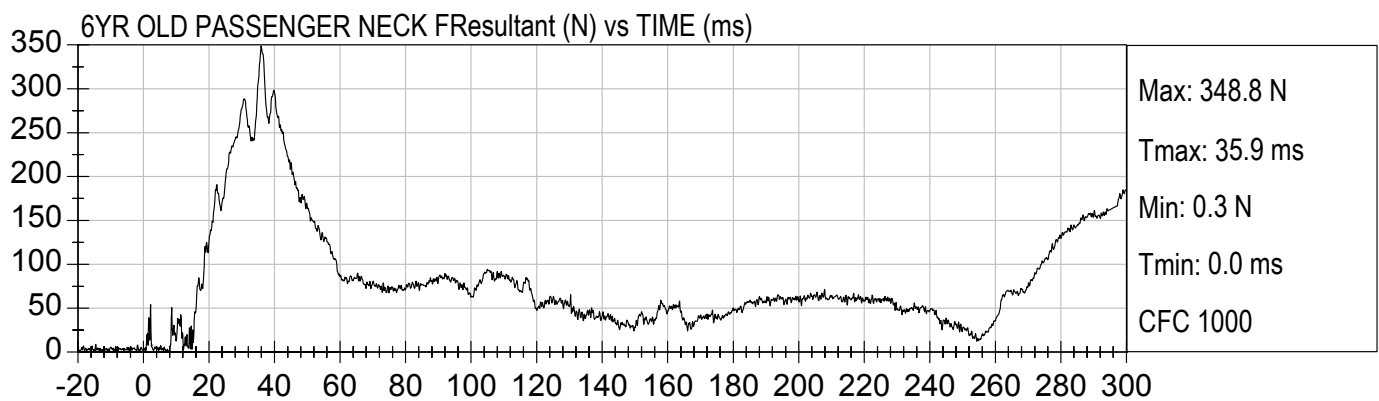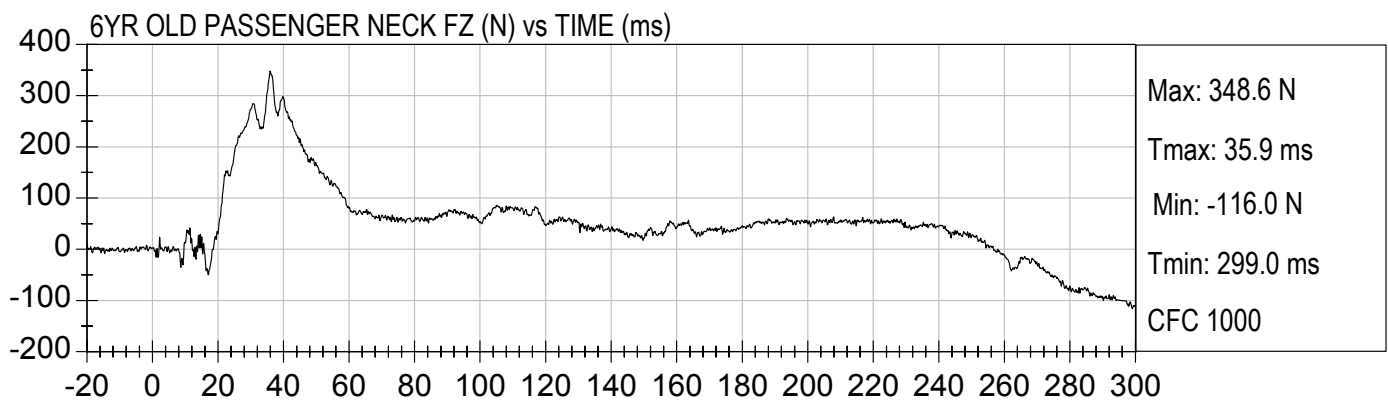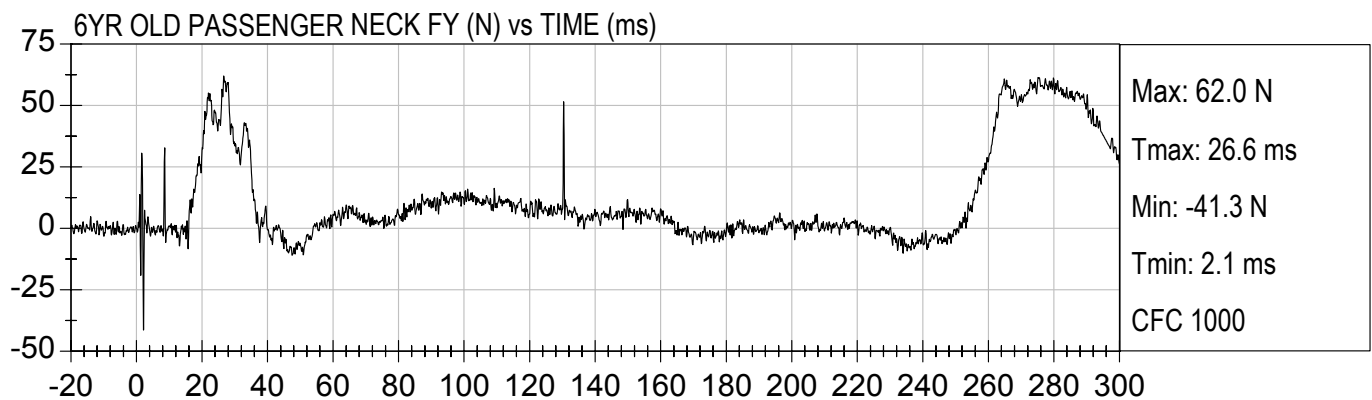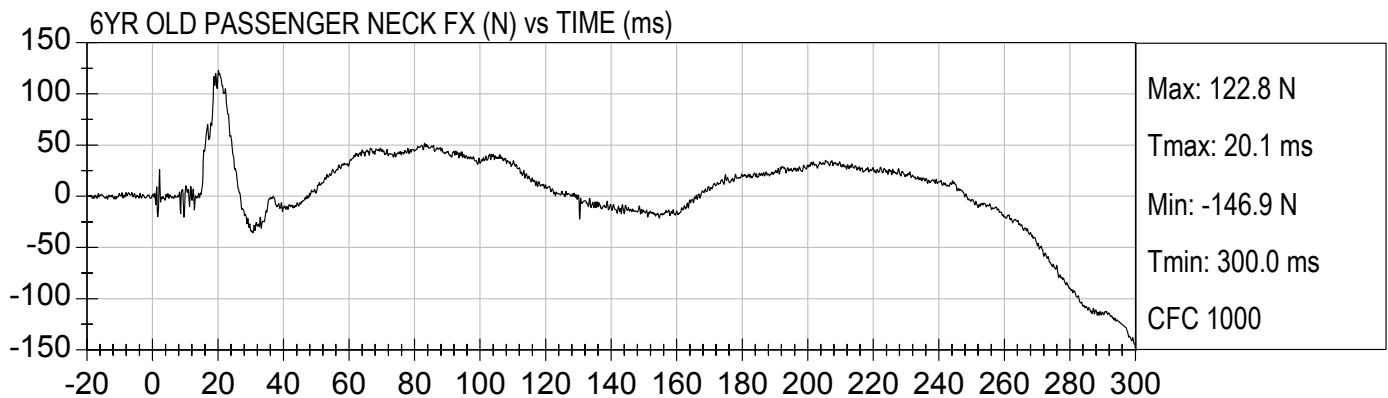





6YR OLD PASSENGER NECK MX (Nm) vs TIME (ms)

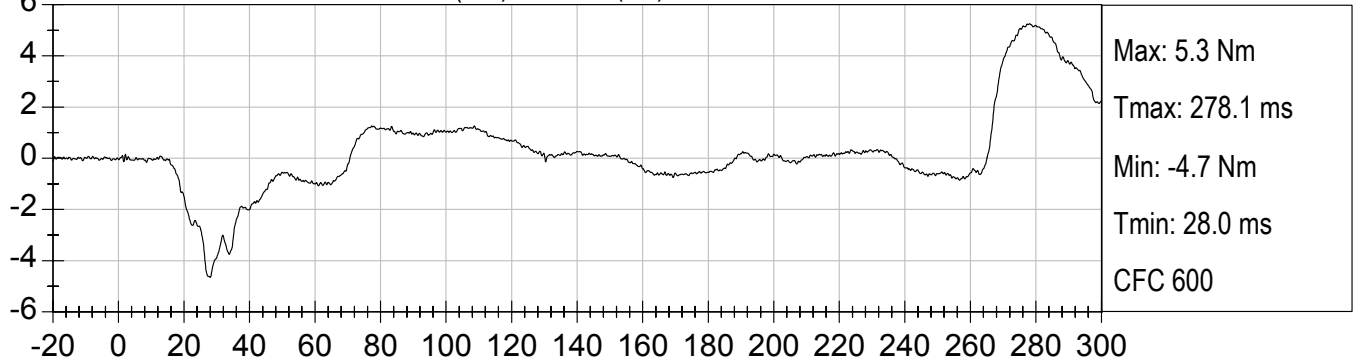


6YR OLD PASSENGER NECK MY (Nm) vs TIME (ms)




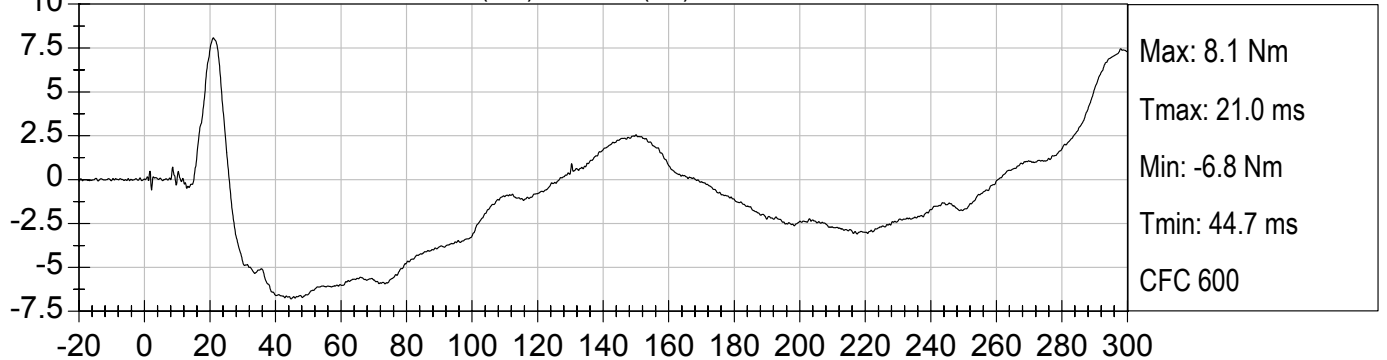






6YR OLD PASSENGER NECK MZ (Nm) vs TIME (ms)

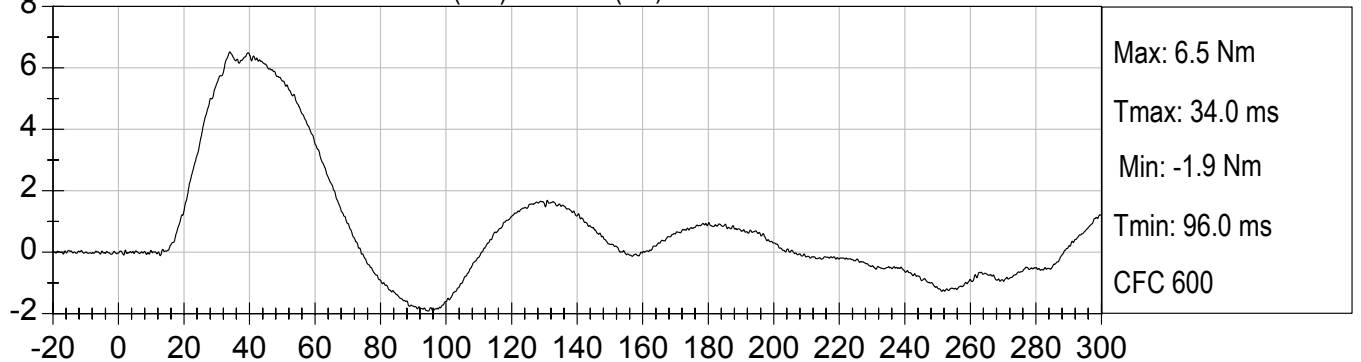

Pass. Occipital Condyle Moment (Nm) vs TIME (ms)

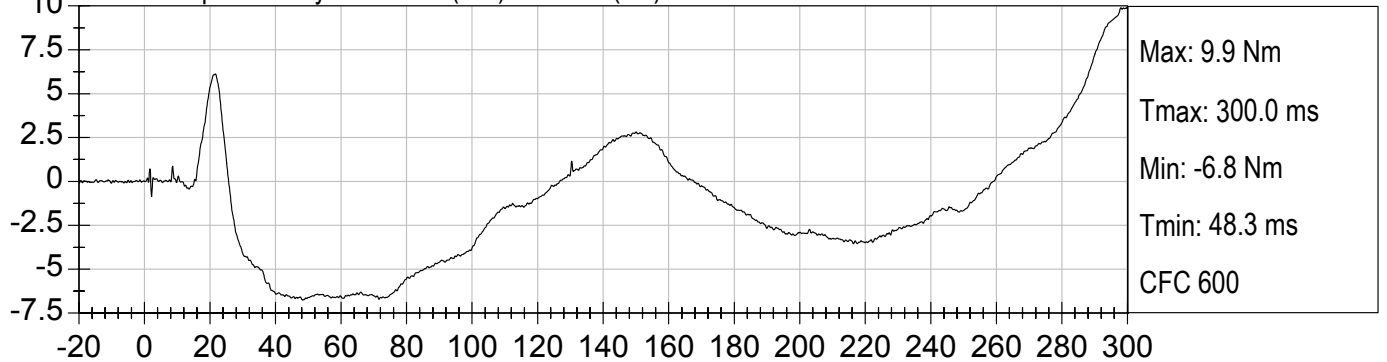


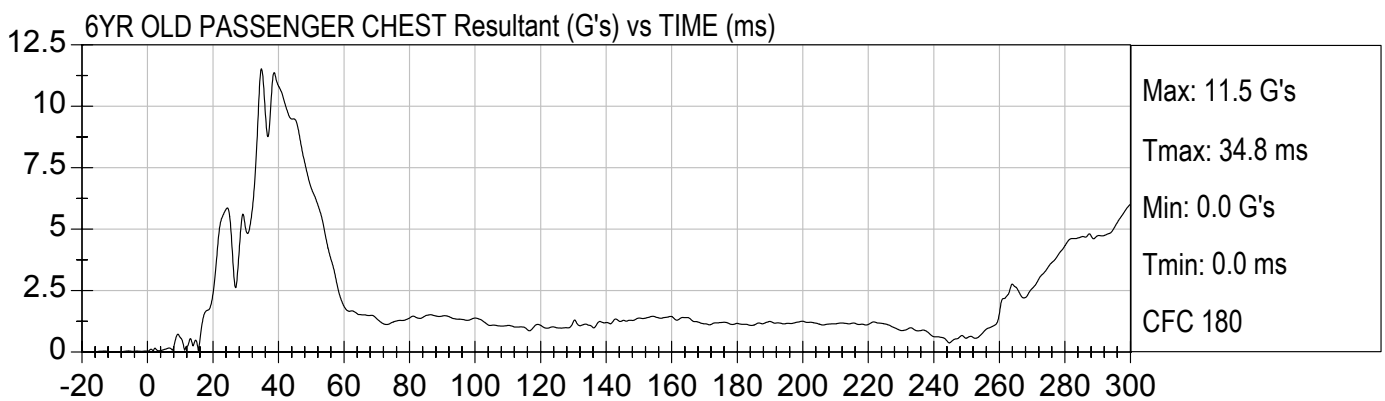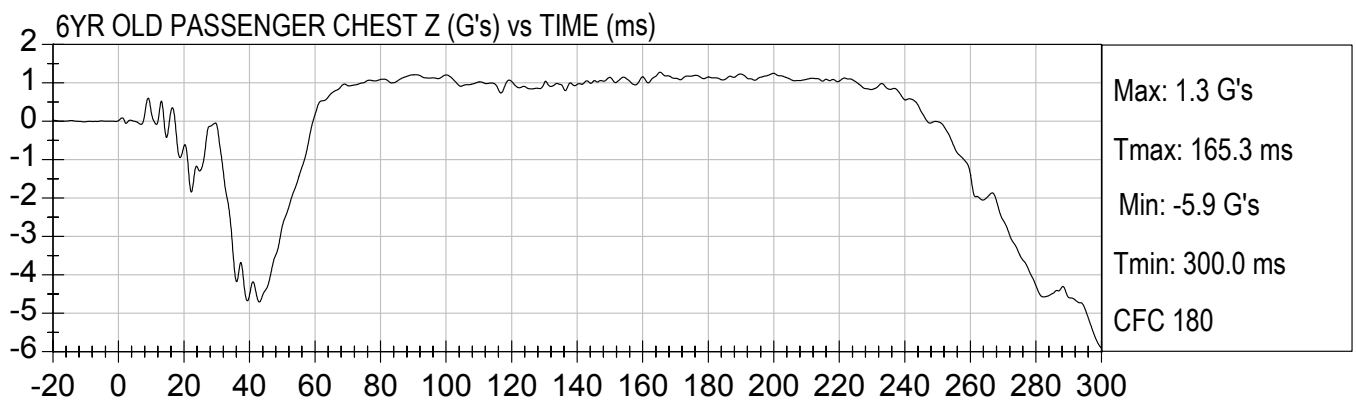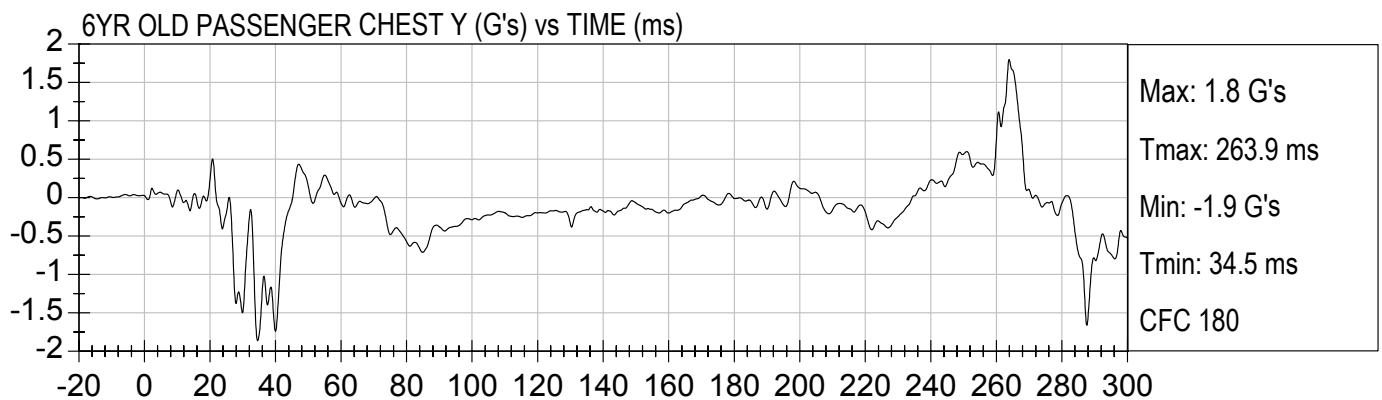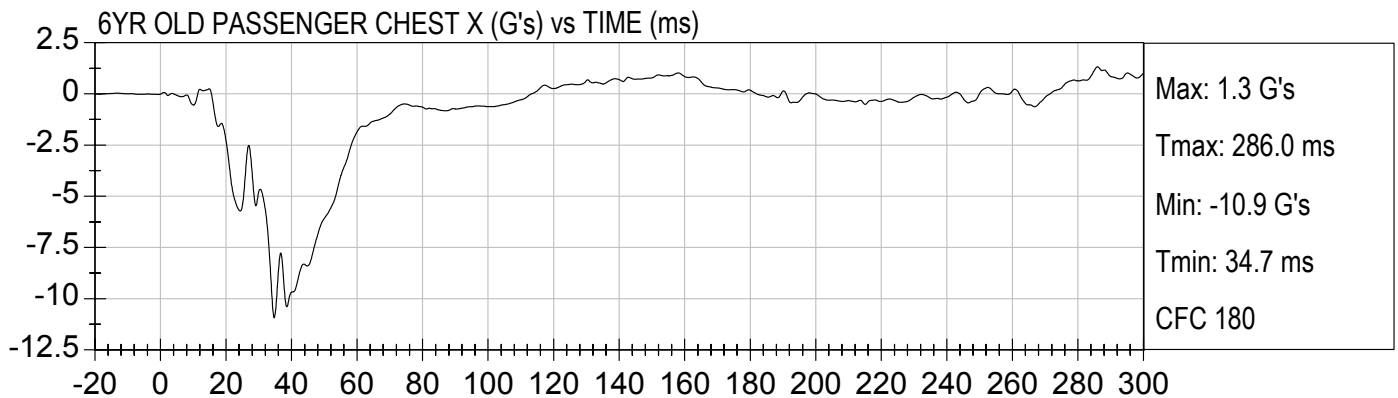

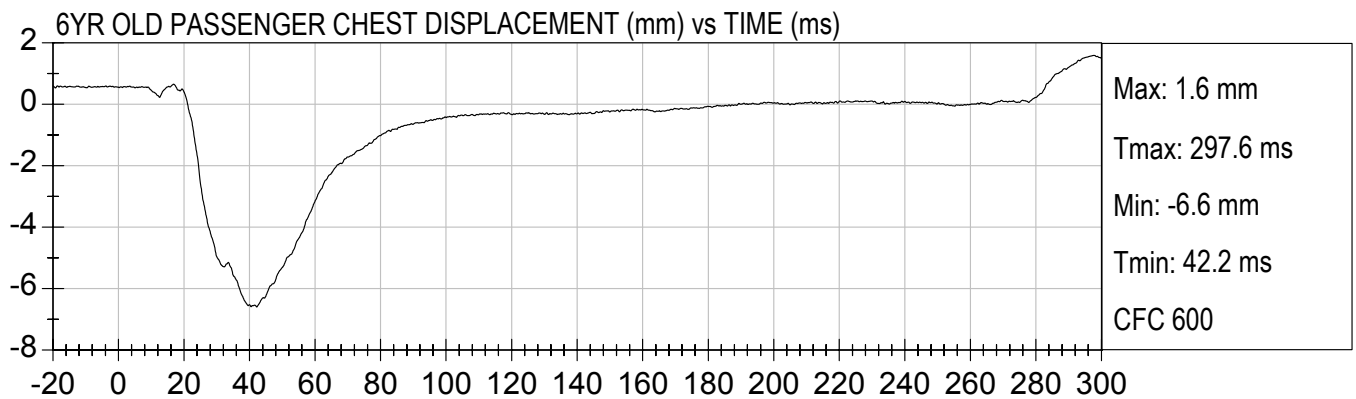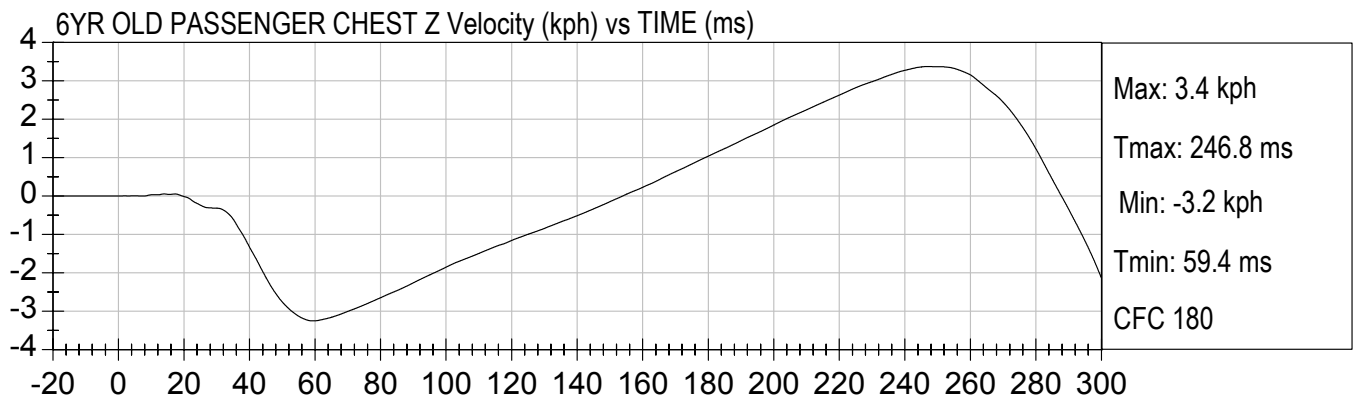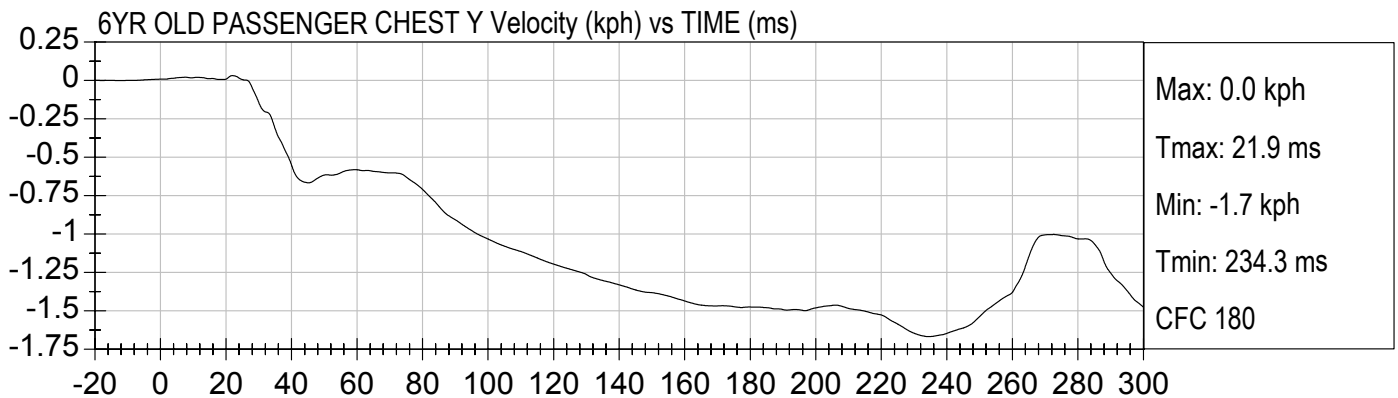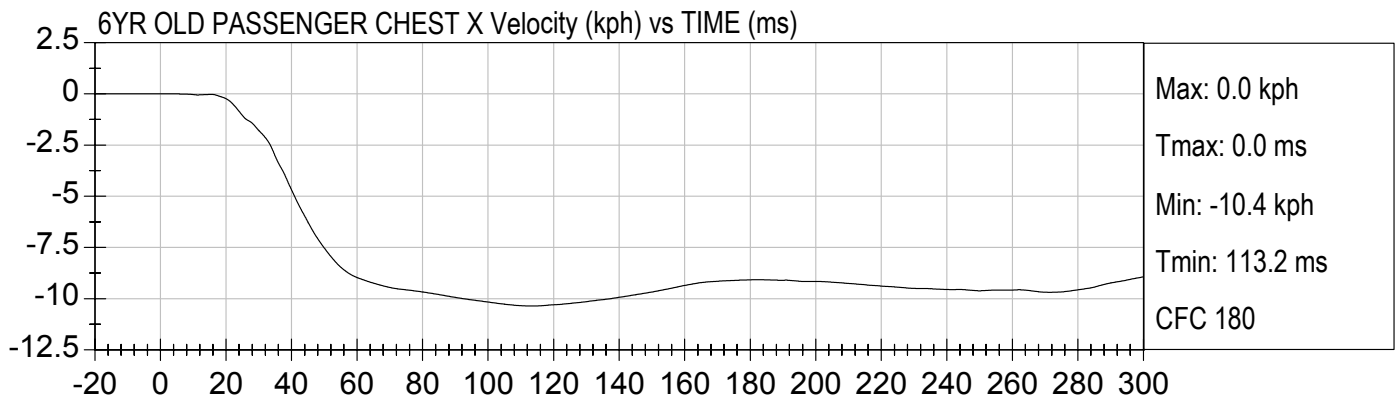





FIRE VOLTAGE #1 (Volts) vs TIME (ms)

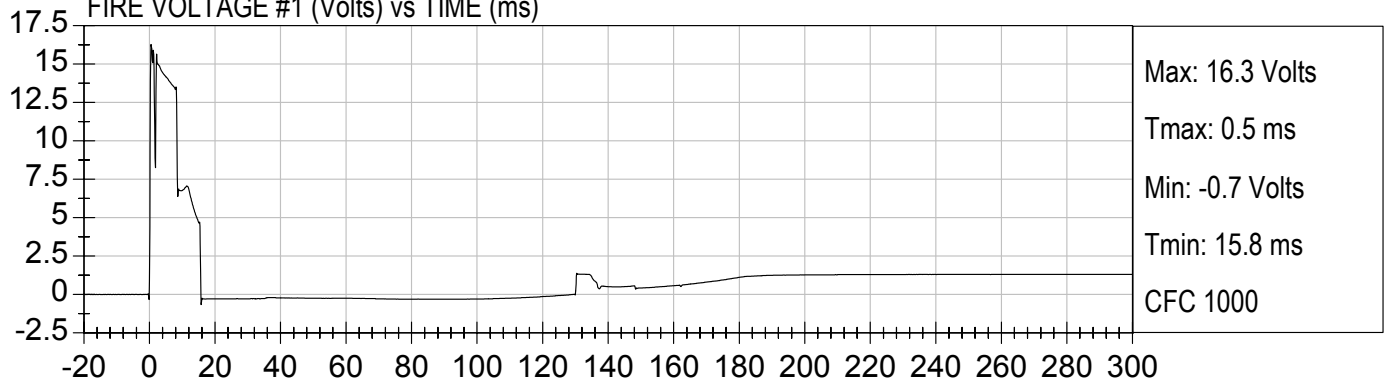


FIRE CURRENT #1 (Amps) vs TIME (ms)

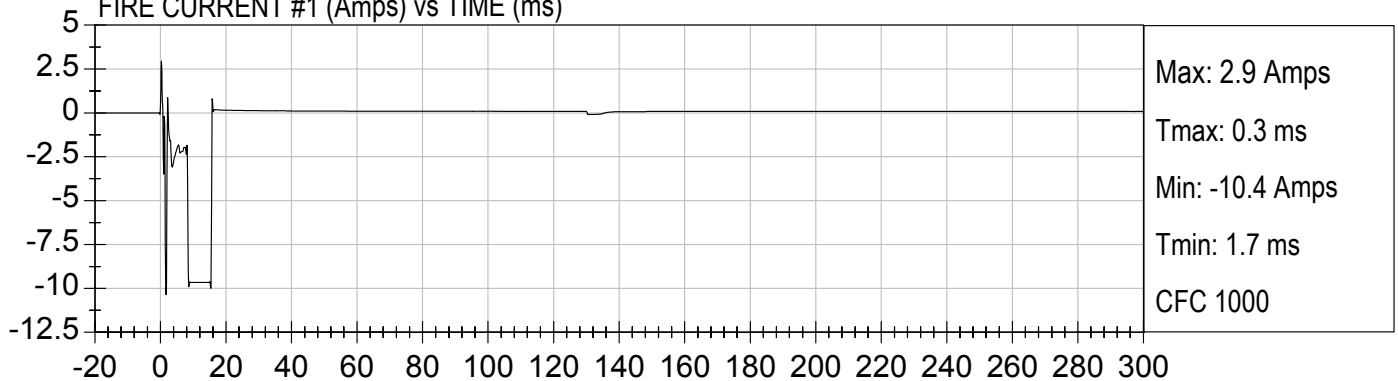

FIRE VOLTAGE #2 (Volts) vs TIME (ms)

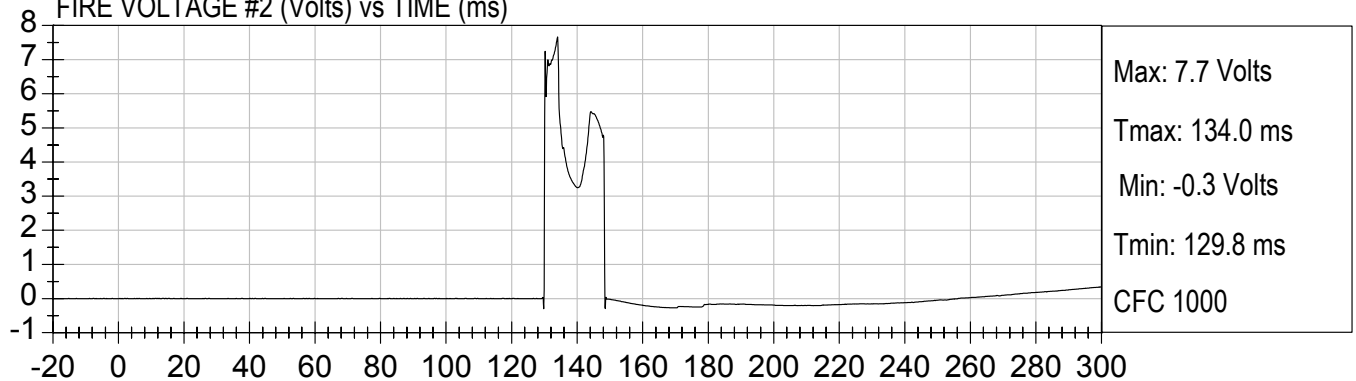


FIRE CURRENT #2 (Amps) vs TIME (ms)

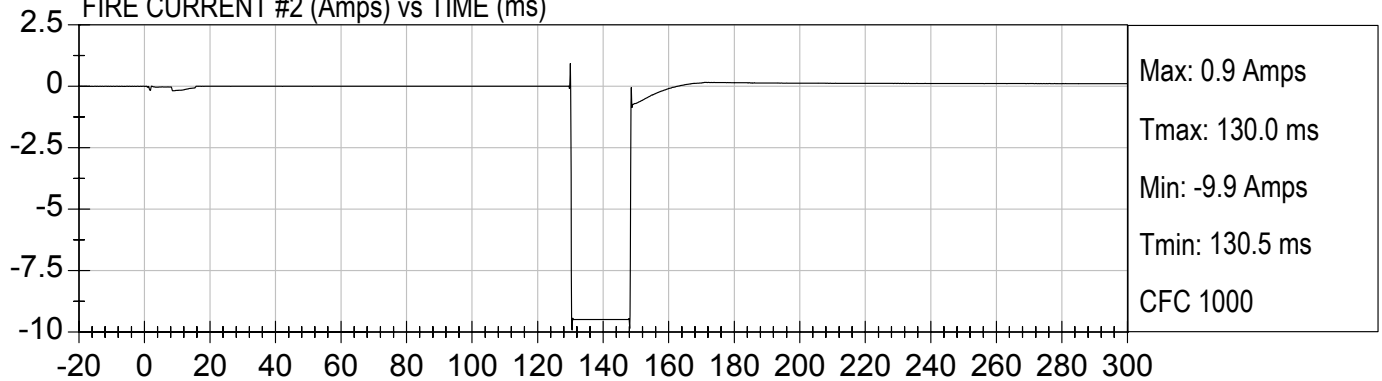





PASS. nij (NTF) () vs TIME SPECIAL CHS (ms)

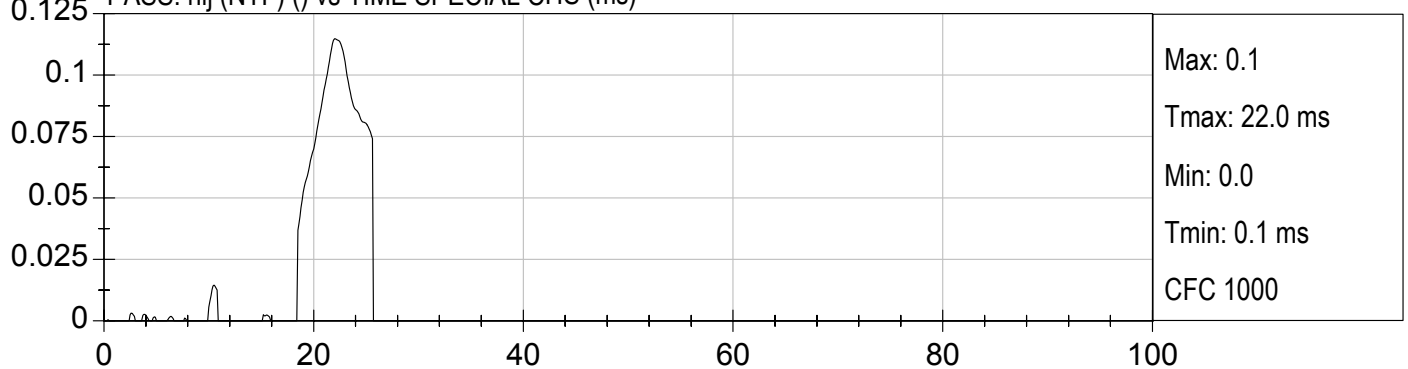


Pass. nij (NTE) () vs TIME SPECIAL CHS (ms)




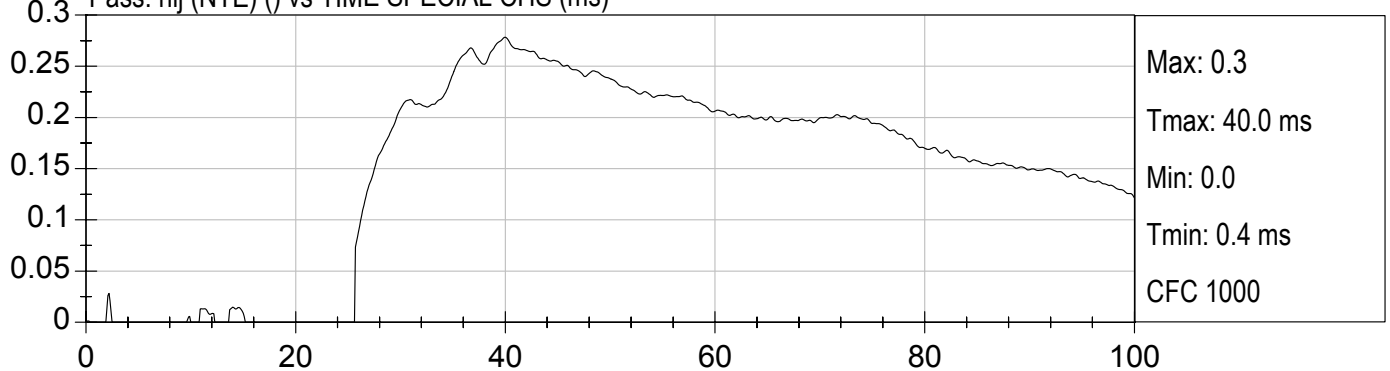





Pass. nij (NCF) () vs TIME SPECIAL CHS (ms)

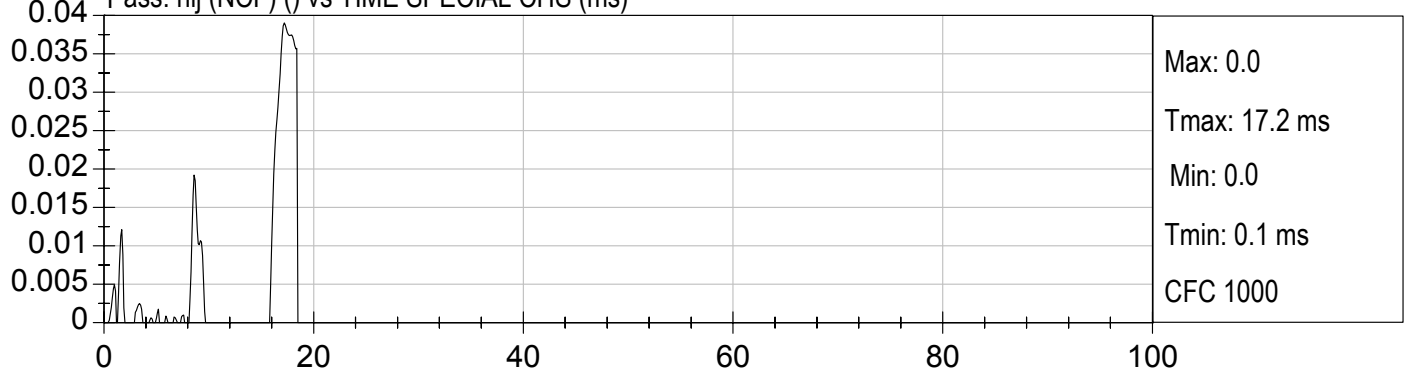

Pass. nij (NCE) () vs TIME SPECIAL CHS (ms)

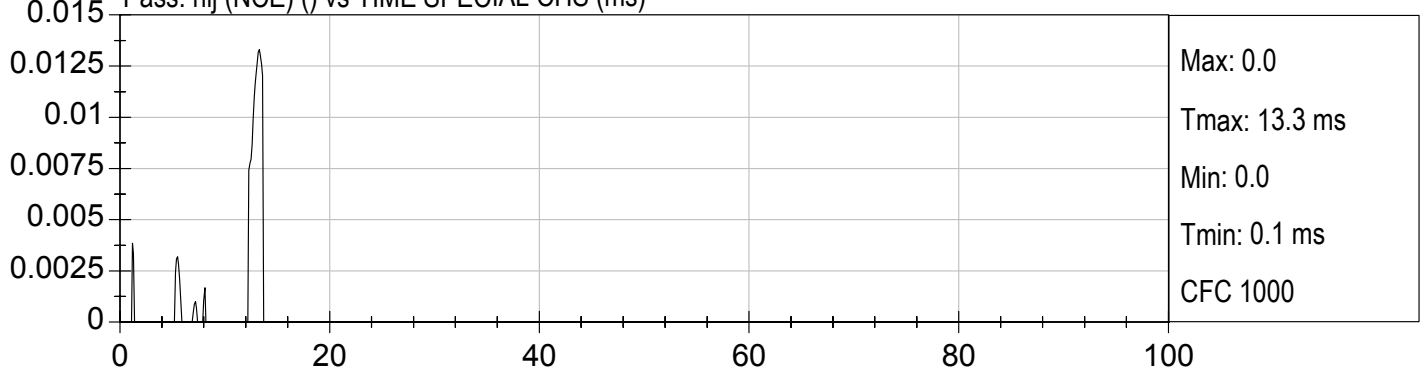


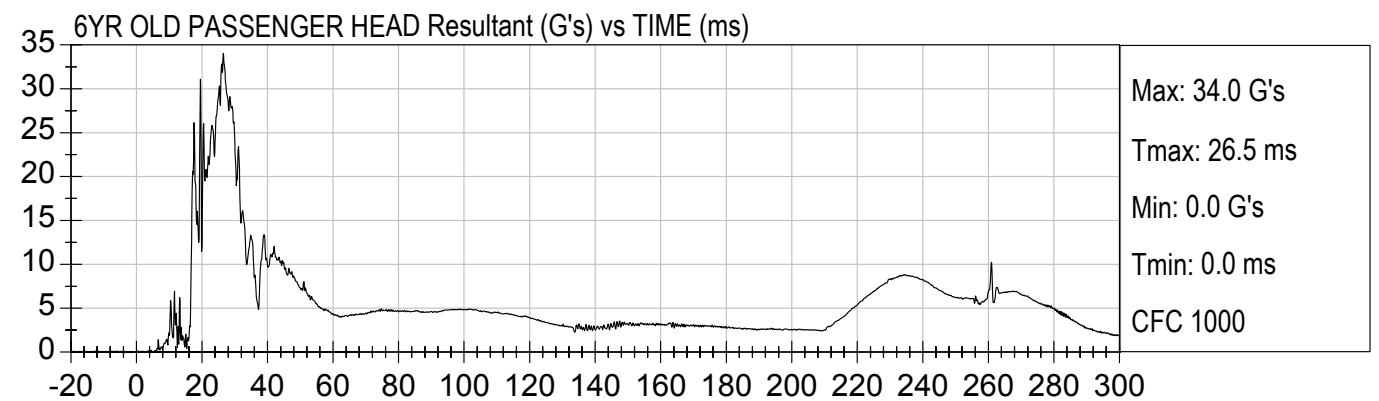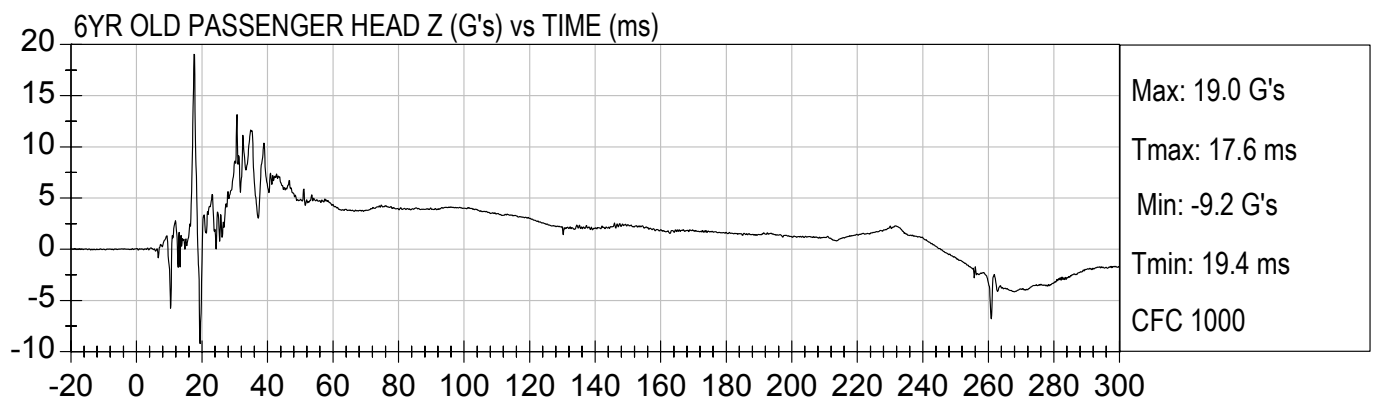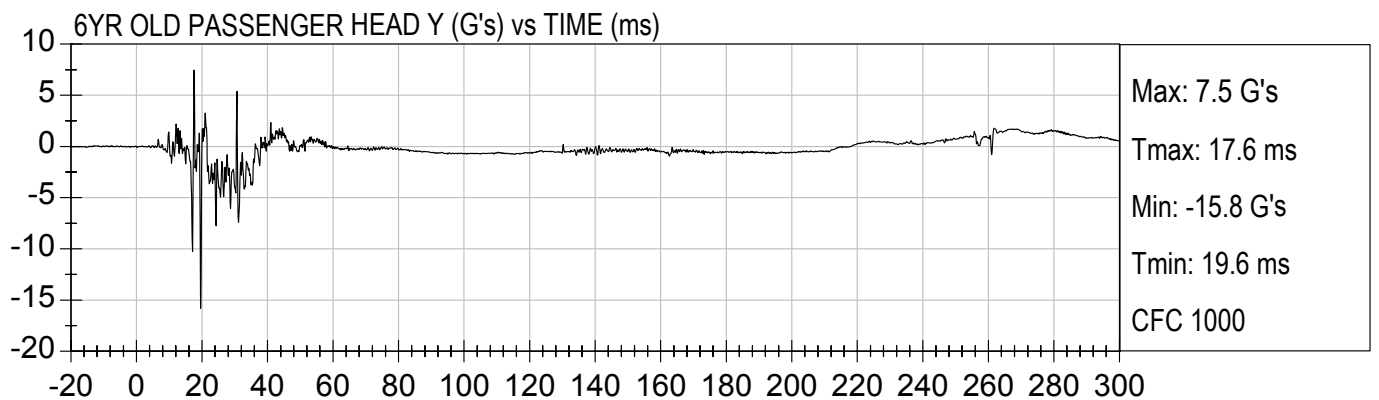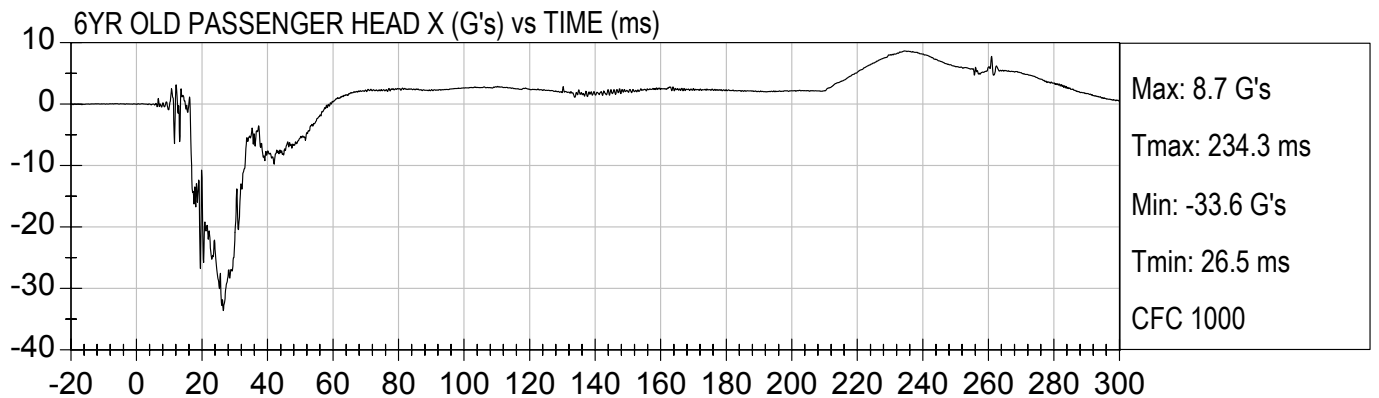

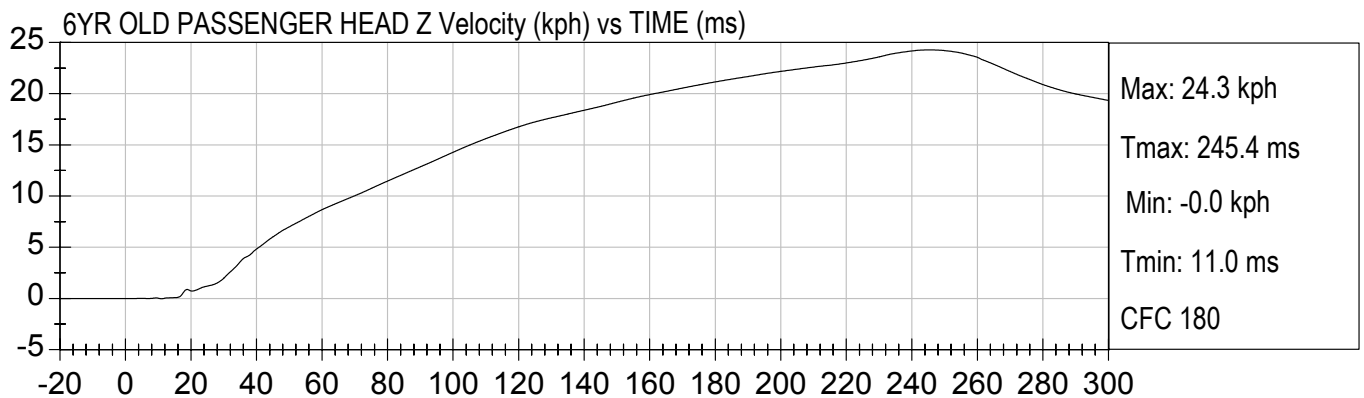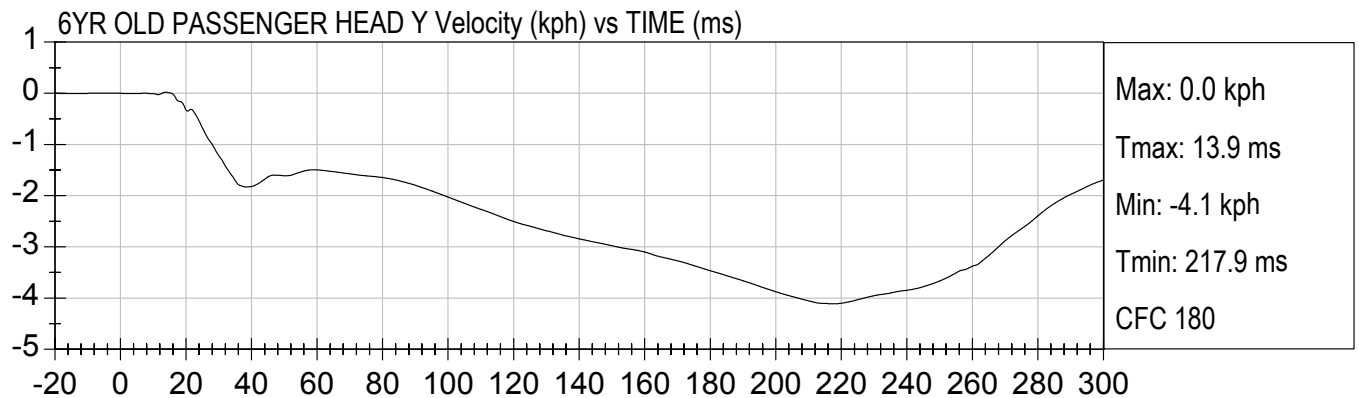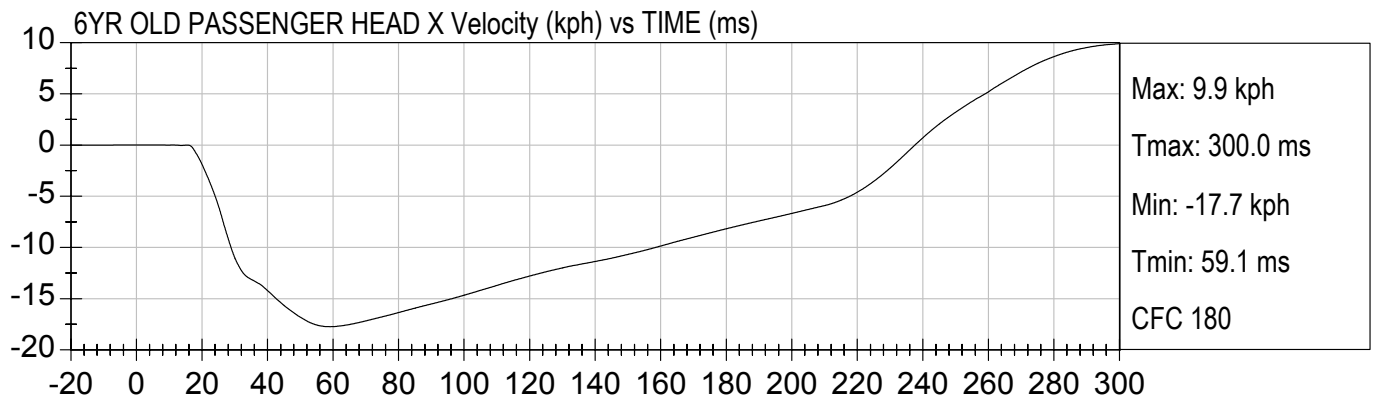





6YR OLD PASSENGER NECK FX (N) vs TIME (ms)

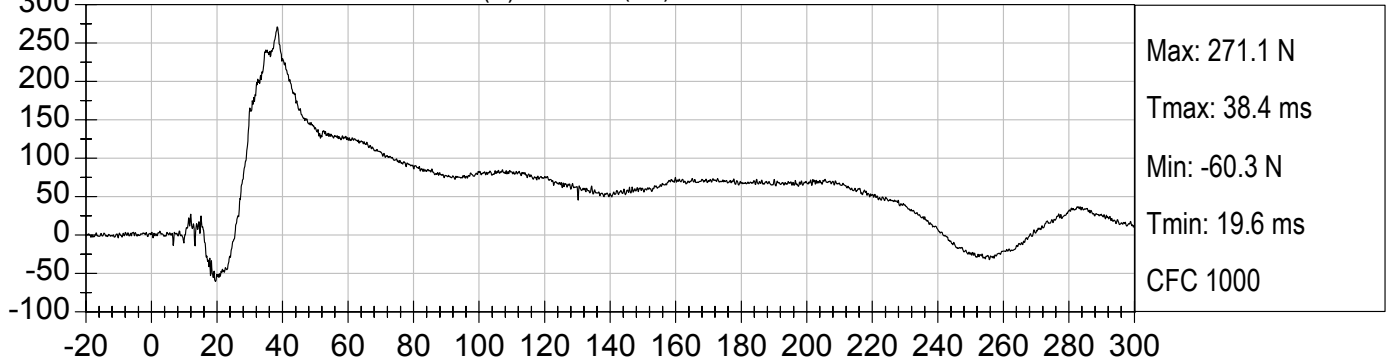


6YR OLD PASSENGER NECK FY (N) vs TIME (ms)

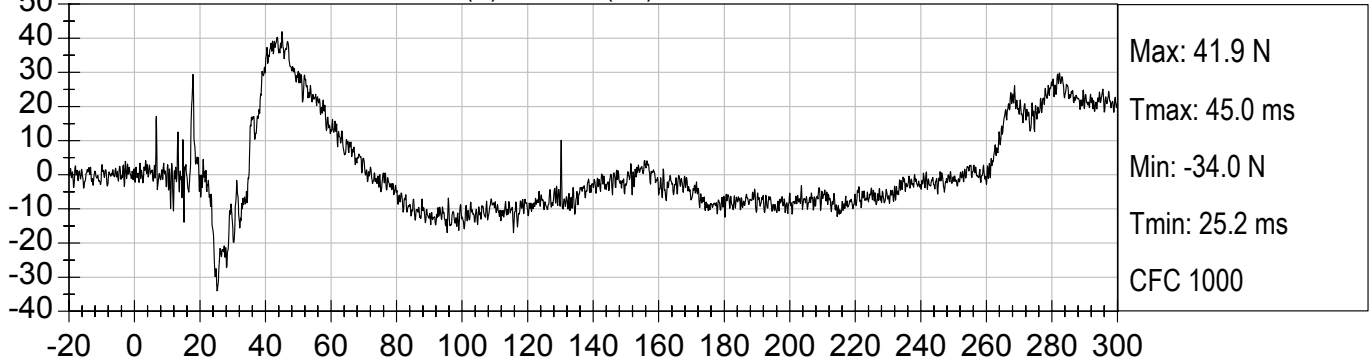

6YR OLD PASSENGER NECK FZ (N) vs TIME (ms)

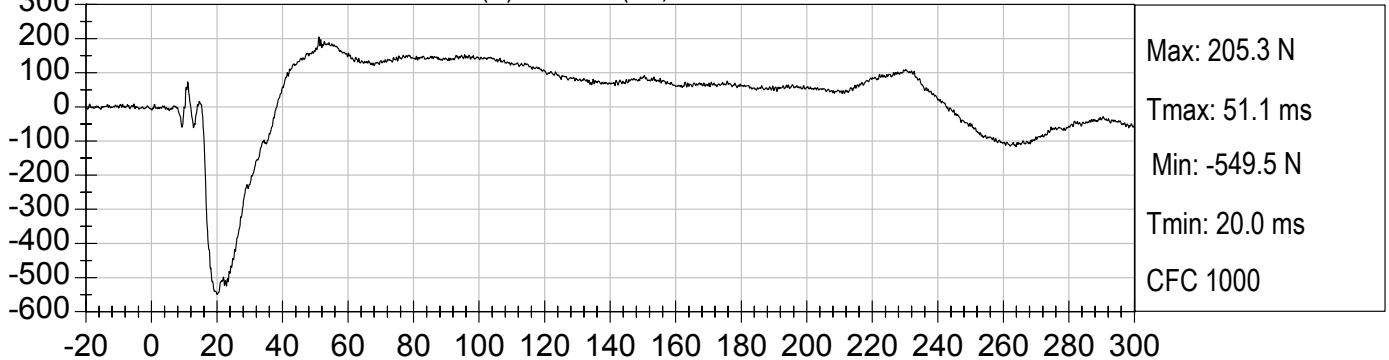


6YR OLD PASSENGER NECK FResultant (N) vs TIME (ms)

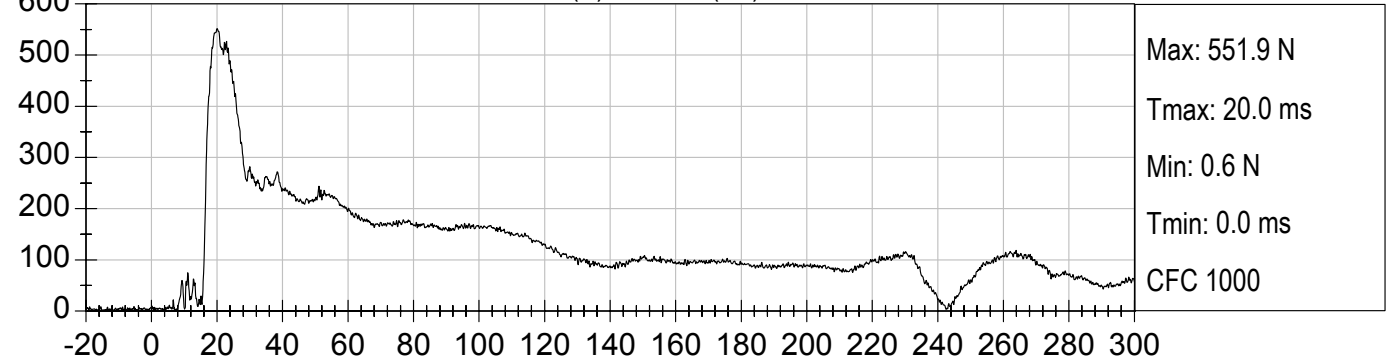





6YR OLD PASSENGER NECK MX (Nm) vs TIME (ms)

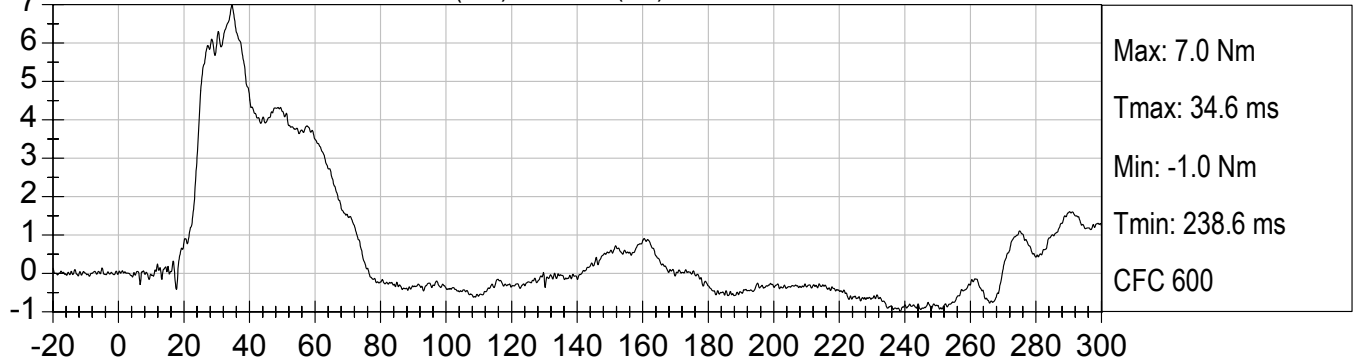


6YR OLD PASSENGER NECK MY (Nm) vs TIME (ms)




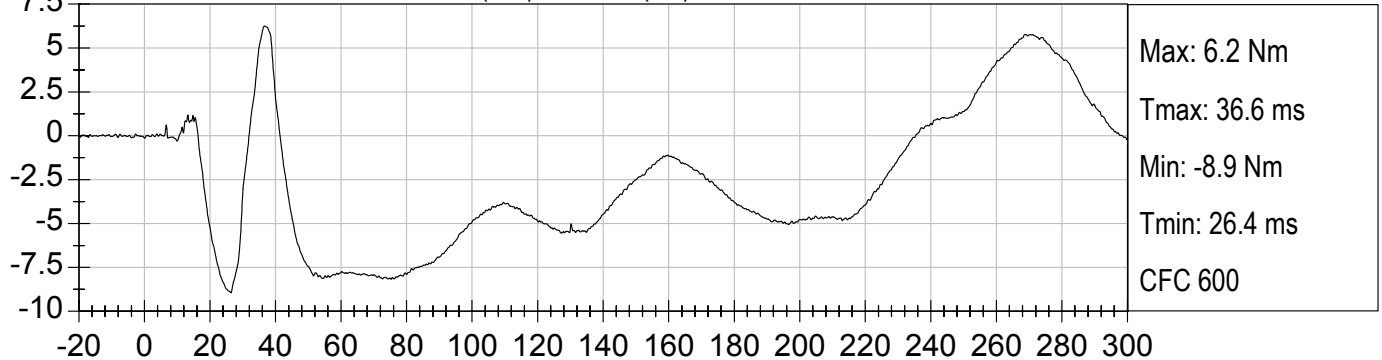






6YR OLD PASSENGER NECK MZ (Nm) vs TIME (ms)

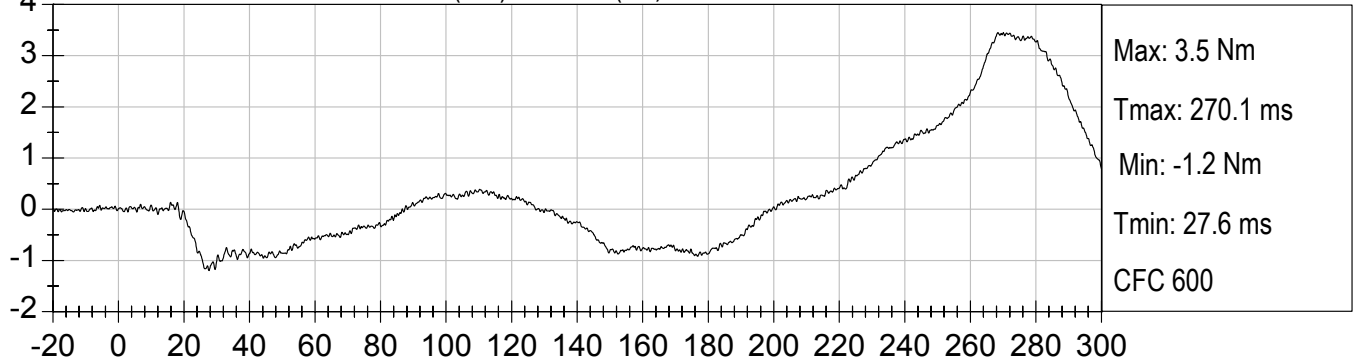

Pass. Occipital Condyle Moment (Nm) vs TIME (ms)

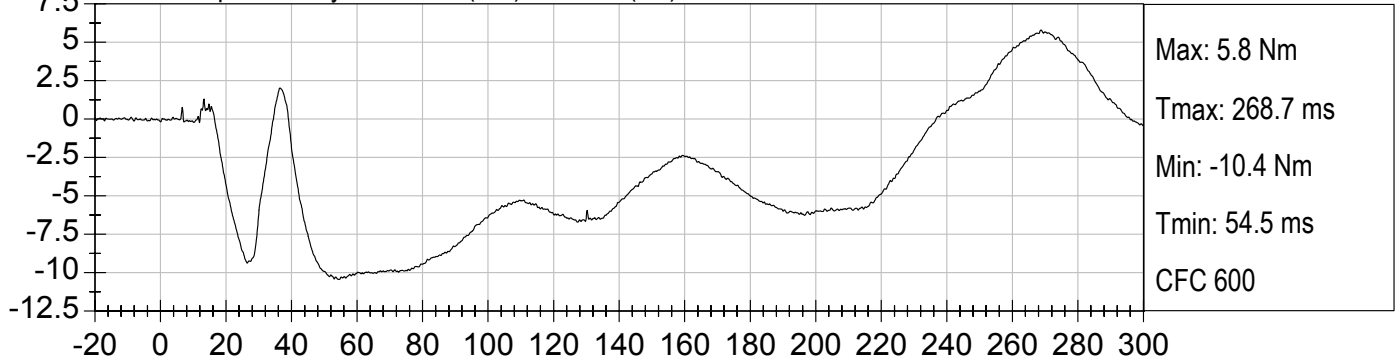


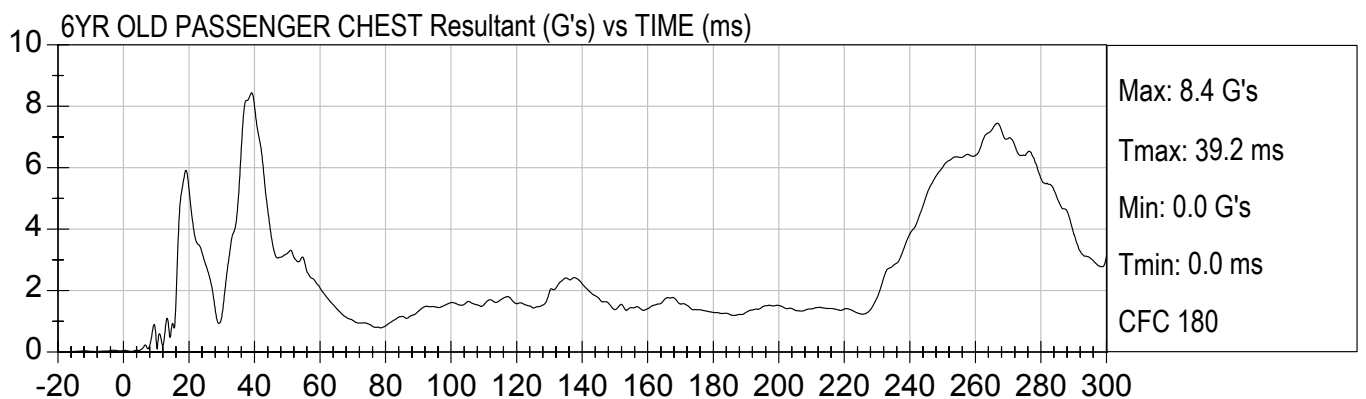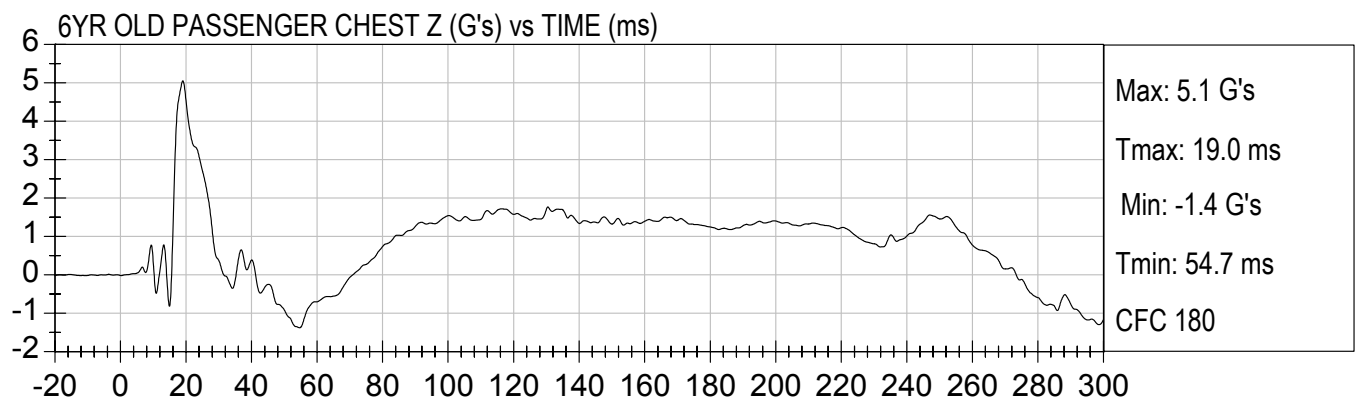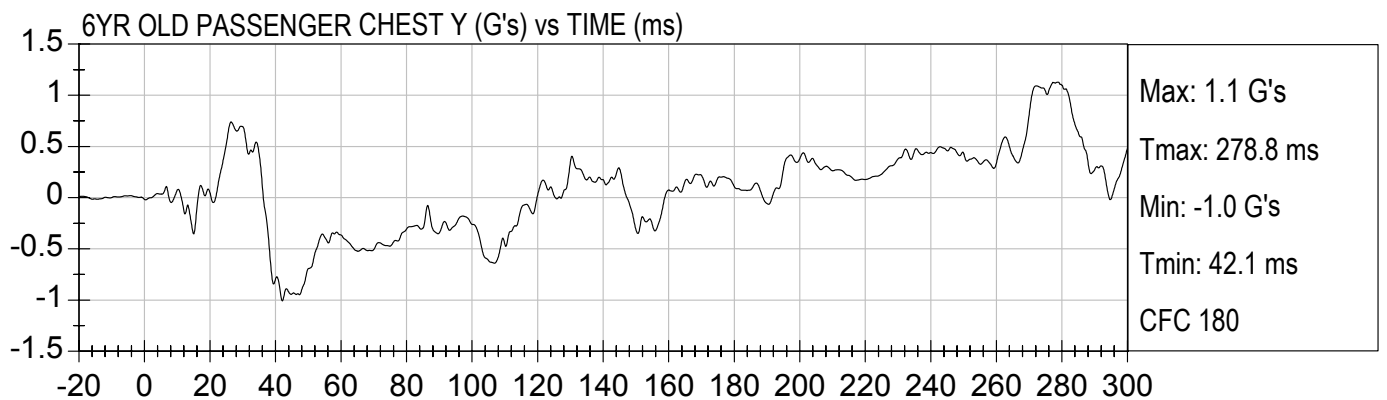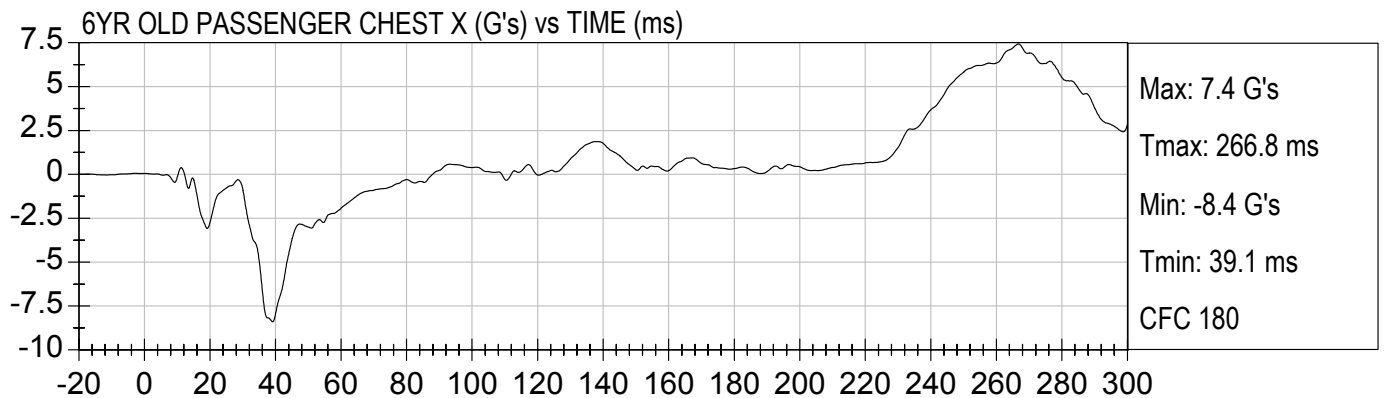

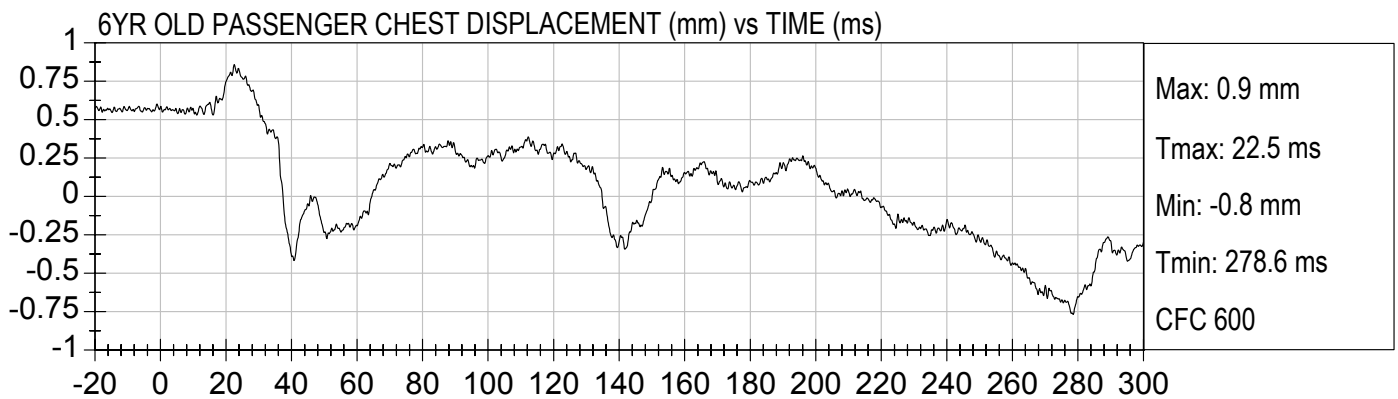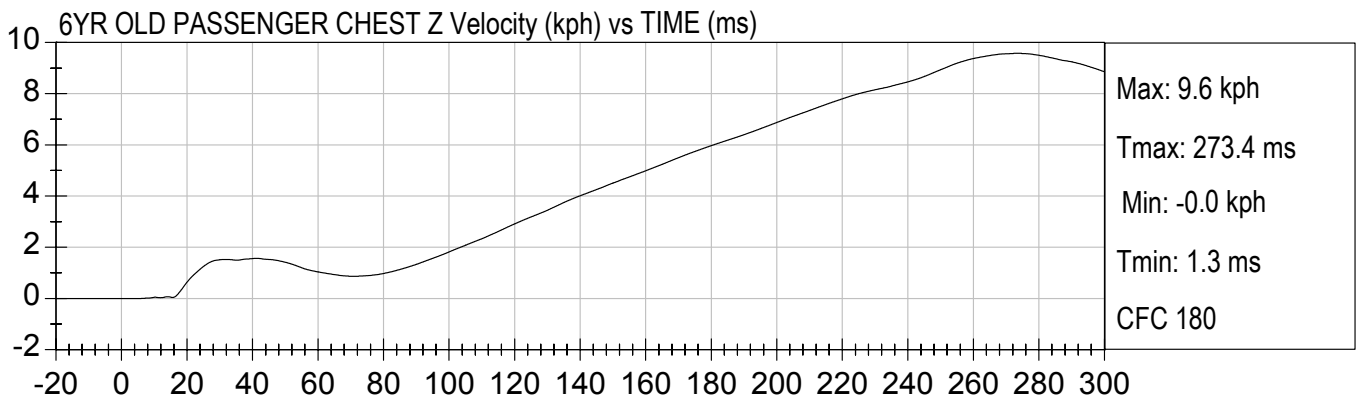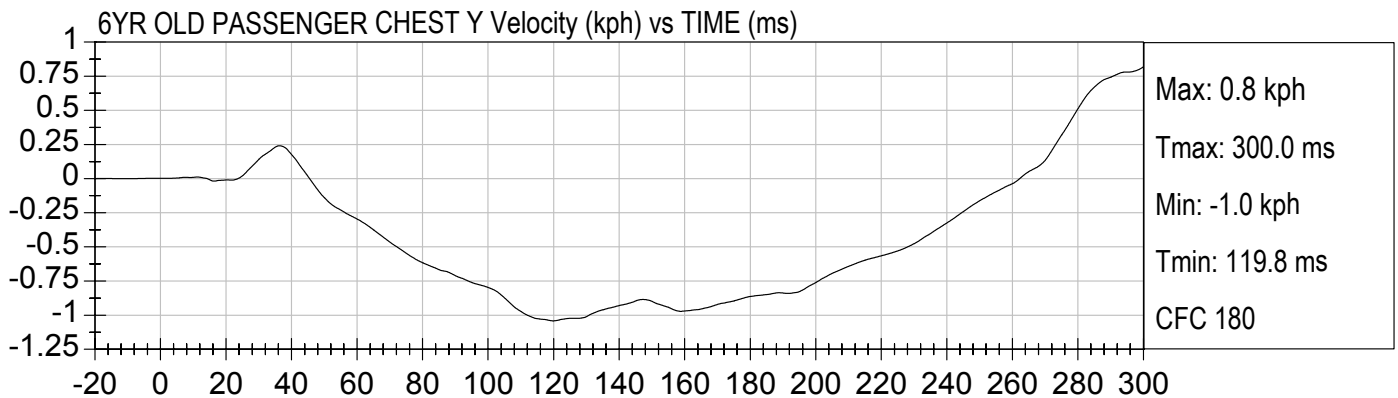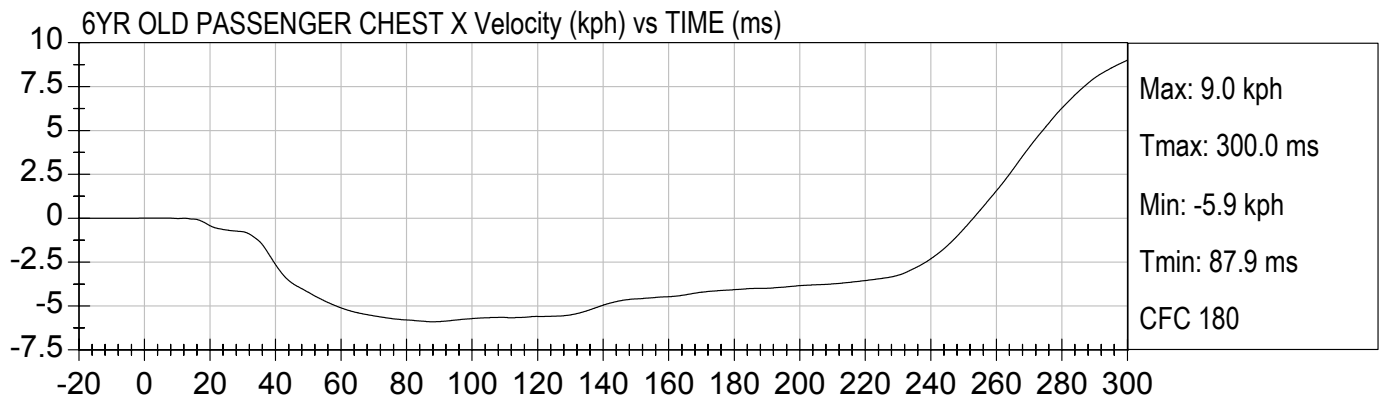





FIRE VOLTAGE #1 (Volts) vs TIME (ms)

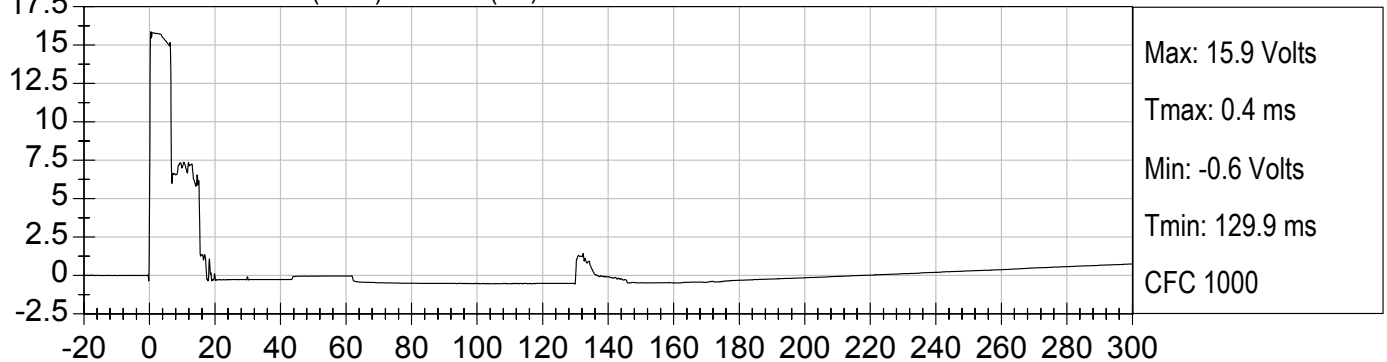


FIRE CURRENT #1 (Amps) vs TIME (ms)

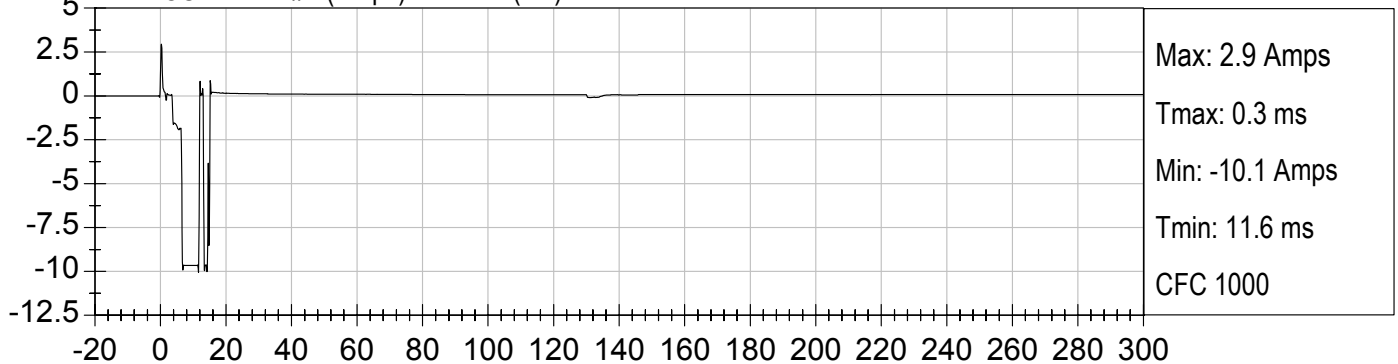

FIRE VOLTAGE #2 (Volts) vs TIME (ms)

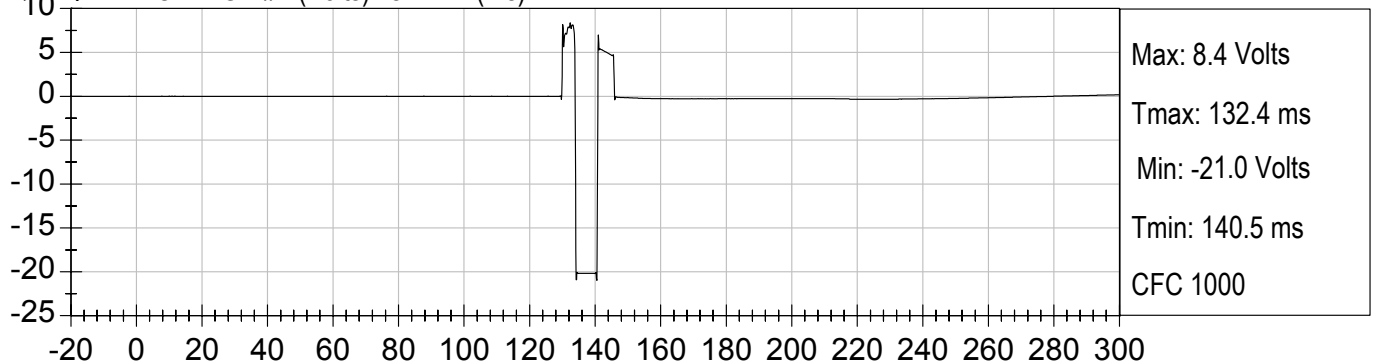


FIRE CURRENT #2 (Amps) vs TIME (ms)

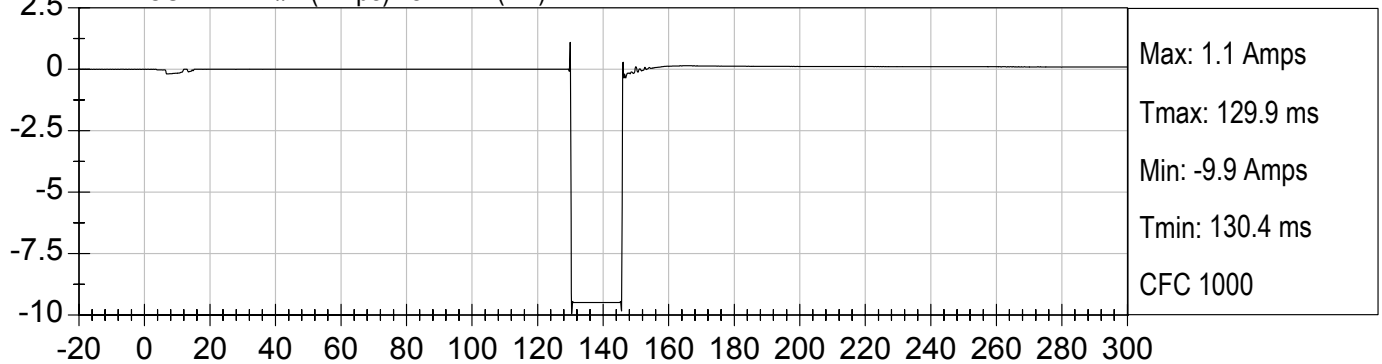





PASS. nij (NTF) () vs TIME SPECIAL CHS (ms)

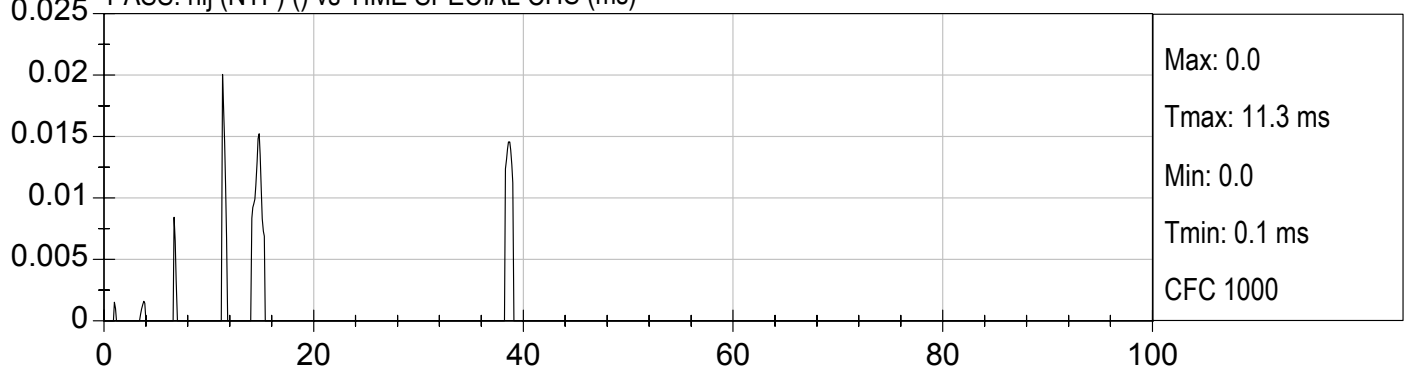


Pass. nij (NTE) () vs TIME SPECIAL CHS (ms)

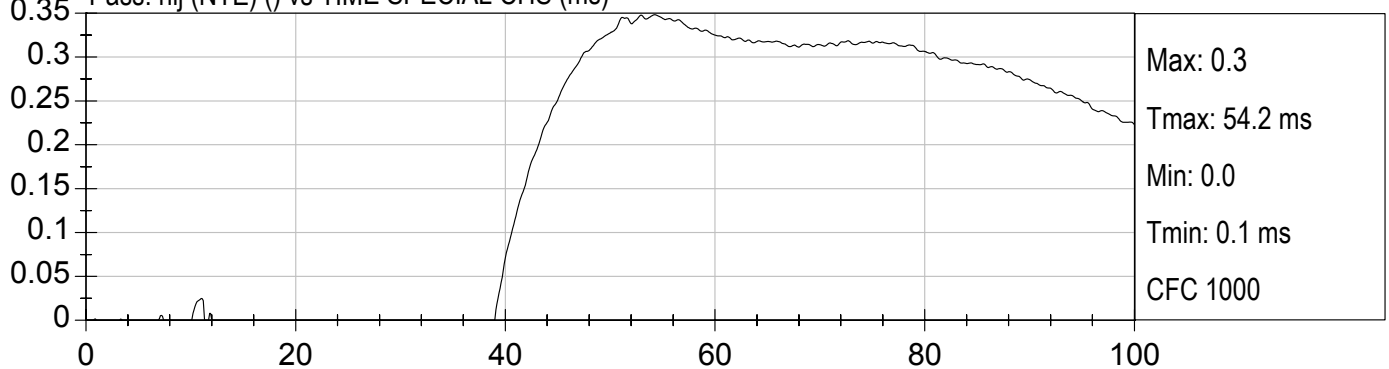

Pass. nij (NCF) () vs TIME SPECIAL CHS (ms)

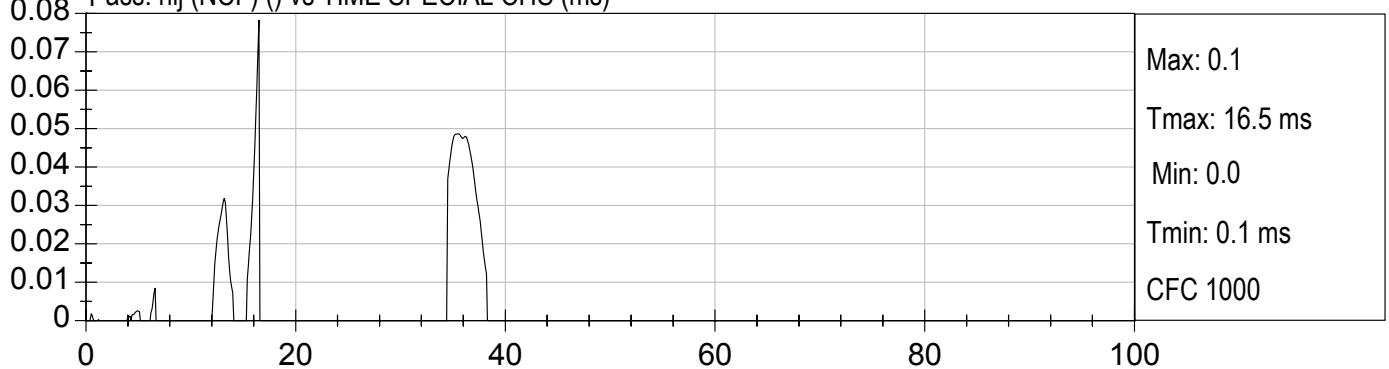

Pass. nij (NCE) () vs TIME SPECIAL CHS (ms)

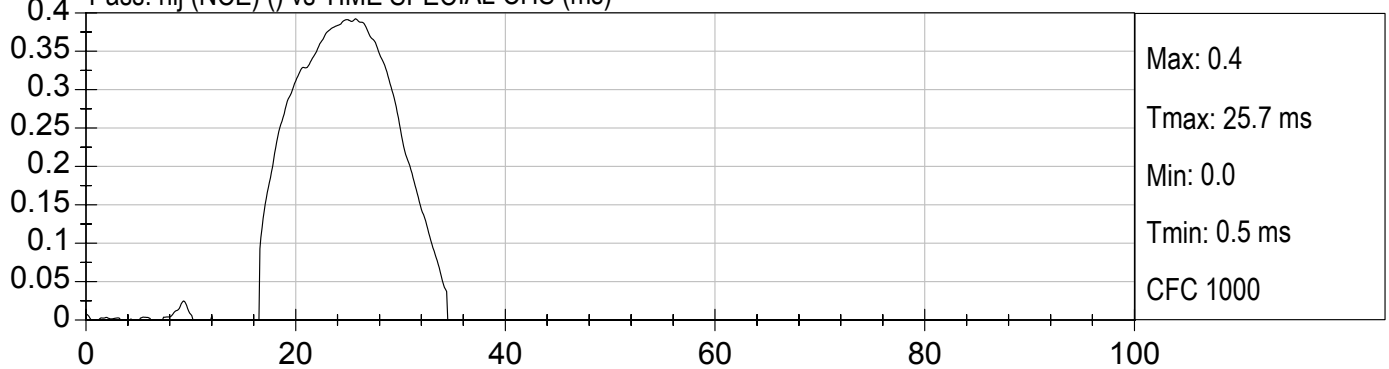

APPENDIX C
CRASH TEST PHOTOGRAPHS

TABLE OF PHOTOGRAPHS

Page No.

Photo No. 1.	Vehicle Certification Label/Tire Placard	C-1
Photo No. 2.	Pre-Test Front View of Test Vehicle	C-2
Photo No. 3.	Post-Test Front View of Test Vehicle	C-3
Photo No. 4.	Pre-Test Left Side View of Test Vehicle	C-4
Photo No. 5.	Post-Test Left Side View of Test Vehicle	C-5
Photo No. 6.	Pre-Test Right Side View of Test Vehicle	C-6
Photo No. 7.	Post-Test Right Side View of Test Vehicle	C-7
Photo No. 8.	Pre-Test Right Rear Three-Quarter View of Test Vehicle	C-8
Photo No. 9.	Post-Test Right Rear Three-Quarter View of Test Vehicle	C-9
Photo No. 10.	Pre-Test Left Rear Three-Quarter View of Test Vehicle	C-10
Photo No. 11.	Post-Test Left Rear Three-Quarter View of Test Vehicle	C-11
Photo No. 12.	Pre-Test Rear View of Test Vehicle	C-12
Photo No. 13.	Post-Test Rear View of Test Vehicle	C-13
Photo No. 14.	Pre-Test Windshield View	C-14
Photo No. 15.	Post-Test Windshield View	C-15
Photo No. 16.	Pre-Test Engine Compartment View	C-16
Photo No. 17.	Post-Test Engine Compartment View	C-17
Photo No. 18.	Pre-Test Fuel Filler Cap View	C-18
Photo No. 19.	Post-Test Fuel Filler Cap View	C-19
Photo No. 20.	Pre-Test Front Underbody View	C-20
Photo No. 21.	Post-Test Front Underbody View	C-21
Photo No. 22.	Pre-Test Mid Front Underbody	C-22
Photo No. 23.	Pre-Test Mid Rear Underbody	C-23
Photo No. 24.	Post-Test Mid Underbody	C-24
Photo No. 25.	Pre-Test Rear Underbody View	C-25
Photo No. 26.	Post-Test Rear Underbody View	C-26

Page No.

Photo No. 27.	Pre-Test Driver Dummy Front View (head position)	C-27
Photo No. 28.	Post-Test Driver Dummy Front View (head position)	C-28
Photo No. 29.	Pre-Test Driver Dummy Position Left Side View	C-29
Photo No. 30.	Post-Test Driver Dummy Position Left Side View	C-30
Photo No. 31.	Pre-Test Driver Dummy Position Left Side View (Door Open)	C-31
Photo No. 32.	Post-Test Driver Dummy Position Left Side View (Door Open)	C-32
Photo No. 33.	Pre-Test Driver Dummy Seat Position	C-33
Photo No. 34.	Post-Test Driver Dummy Seat Position	C-34
Photo No. 35.	Pre-Test Driver Dummy Feet Position	C-35
Photo No. 36.	Post-Test Driver Dummy Feet Position	C-36
Photo No. 37.	Pre-Test Driver Side Knee Bolster View	C-37
Photo No. 38.	Post-Test Driver Side Knee Bolster View	C-38
Photo No. 39.	Post-Test Driver Dummy Head Contact	C-39
Photo No. 40.	Post-Test Driver Dummy Knee Contact	C-40
Photo No. 41.	Post-Test Driver Dummy Airbag Contact	C-41
Photo No. 42.	Pre-Test Passenger Dummy Front View (head position)	C-42
Photo No. 43.	Post-Test Passenger Dummy Front View (head position)	C-43
Photo No. 44.	Pre-Test Passenger Dummy Position Right Side View	C-44
Photo No. 45.	Post-Test Passenger Dummy Position Right Side View	C-45
Photo No. 46.	Pre-Test Passenger Dummy Position Right Side View (Door Open)	C-46
Photo No. 47.	Post-Test Passenger Dummy Position Right Side View (Door Open)	C-47
Photo No. 48.	Pre-Test Passenger Dummy Seat Position	C-48
Photo No. 49.	Post-Test Passenger Dummy Seat Position	C-49
Photo No. 50.	Pre-Test Passenger Dummy Feet Position	C-50
Photo No. 51.	Post-Test Passenger Dummy Feet Position	C-51
Photo No. 52.	Pre-Test Passenger Side Knee Bolster View	C-52
Photo No. 53.	Post-Test Passenger Side Knee Bolster View	C-53
Photo No. 54.	Post-Test Passenger Dummy Head Contact	C-54

Page No.

Photo No. 55.	Post-Test Passenger Dummy Knee Contact	C-55
Photo No. 56.	Post-Test Passenger Dummy Airbag Contact	C-56
Photo No. 57.	Pre-Test CRP Dummy Front View (head position)	C-57
Photo No. 58.	Post-Test CRP Dummy Front View (head position)	C-58
Photo No. 59.	Pre-Test CRP Dummy Position Left Side View	C-59
Photo No. 60.	Post-Test CRP Dummy Position Left Side View	C-60
Photo No. 61.	Post-Test CRP Dummy Position Right Side View	C-61
Photo No. 62.	Pre-Test CRP Dummy Position Left Side View (Door Open)	C-62
Photo No. 63.	Post-Test CRP Dummy Position Left Side View (Door Open)	C-63
Photo No. 64.	Pre-Test CRP Dummy Position Right Side View (Door Open)	C-64
Photo No. 65.	Post-Test CRP Dummy Position Right Side View (Door Open)	C-65
Photo No. 66.	Pre-Test CRP Dummy Left Foot Position	C-66
Photo No. 67.	Post-Test CRP Dummy Left Foot Position	C-67
Photo No. 68.	Pre-Test CRP Dummy Right Foot Position	C-68
Photo No. 69.	Post-Test CRP Dummy Right Foot Position	C-69
Photo No. 70.	Pre-Test CRP Left Side Knee Bolster View	C-70
Photo No. 71.	Post-Test CRP Left Side Knee Bolster View	C-71
Photo No. 72.	Pre-Test CRP Right Side Knee Bolster View	C-72
Photo No. 73.	Post-Test CRP Right Side Knee Bolster View	C-73
Photo No. 74.	Post-Test CRP Dummy Knee Contact	C-74
Photo No. 75.	LH and RH MHD Sensor Position	C-75
Photo No. 76.	Rollover 90 Degrees	C-76
Photo No. 77.	Rollover 180 Degrees	C-77
Photo No. 78.	Rollover 270 Degrees	C-78
Photo No. 79.	Rollover 360 Degrees	C-79
Photo No. 80.	Vehicle Impact	C-80
Photo No. 81.	Temperature Plot	C-81

MFD BY DAIMLERCHRYSLER CORPORATION DATE OF MFR 10-03 GWR 2994 KG(6600 LB)

GWR FRONT	WITH TIRES	RIMS AT	COLD
1407 KG(3100 LB)	P245/70R17 BSW	17 X 7.0	227 KPA(33 PSI)
GWR REAR	WITH TIRES	RIMS AT	COLD
1770 KG(3900 LB)	P245/70R17 BSW	17 X 7.0	227 KPA(33 PSI)

THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY AND THEFT PREVENTION STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.


VIN: 1D4HD48N04F114309 TYPE: MPV SINGLE X DUAL



MDH: 102121 085AA PNT:PXB VEHICLE MADE IN U.S.A. TRM:L5D5 4648503



Pre-Test Front View of Test Vehicle

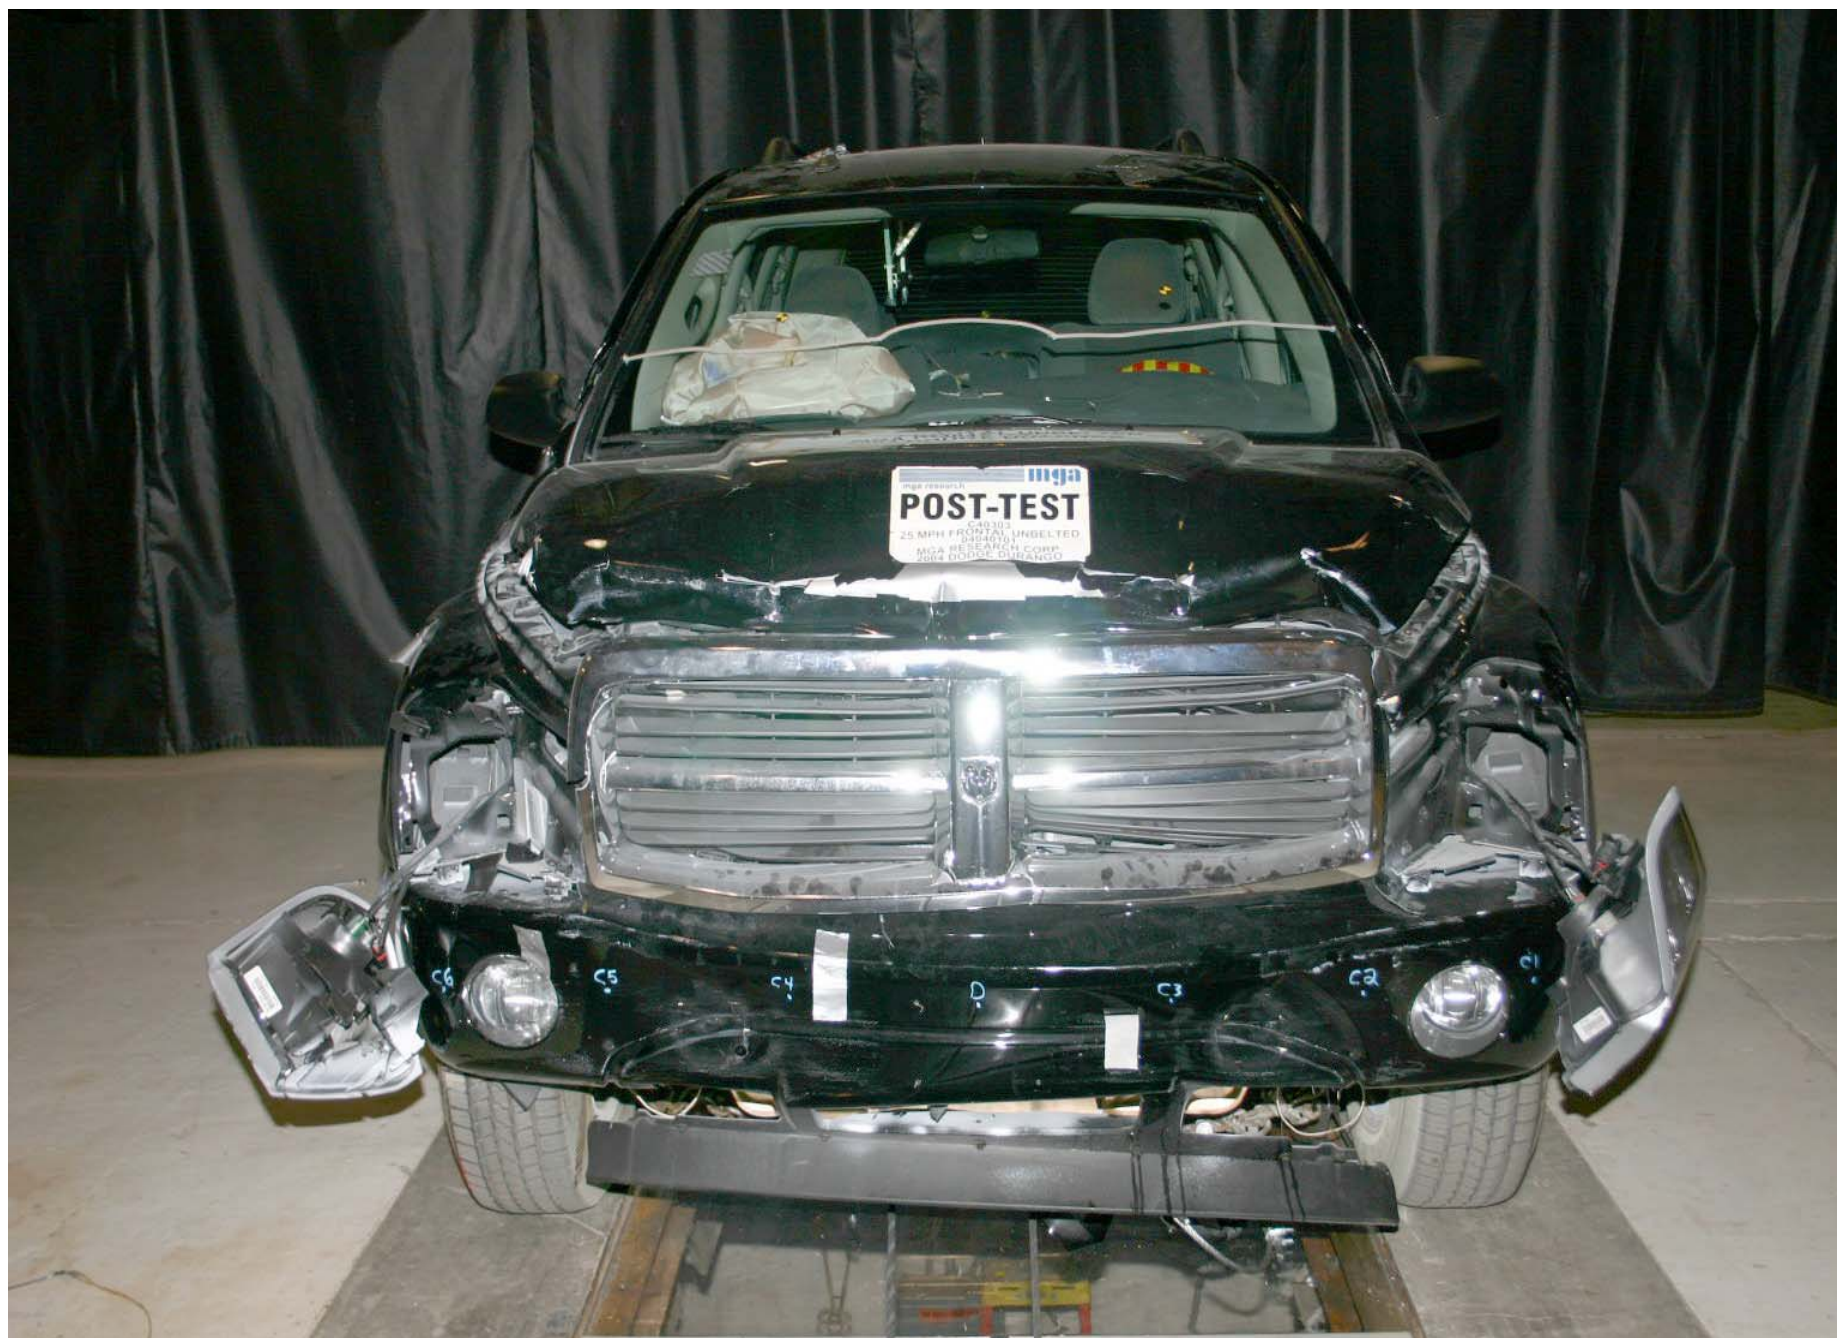

Post-Test Front View of Test Vehicle



Pre-Test Left Side View of Test Vehicle



Post-Test Left Side View of Test Vehicle



Pre-Test Right Side View of Test Vehicle



Post-Test Right Side View of Test Vehicle



Pre-Test Right Rear Three-Quarter View of Test Vehicle



Post-Test Right Rear Three-Quarter View of Test Vehicle



Pre-Test Left Rear Three-Quarter View of Test Vehicle




Post-Test Left Rear Three-Quarter View of Test Vehicle



Pre-Test Rear View of Test Vehicle



Post-Test Rear View of Test Vehicle

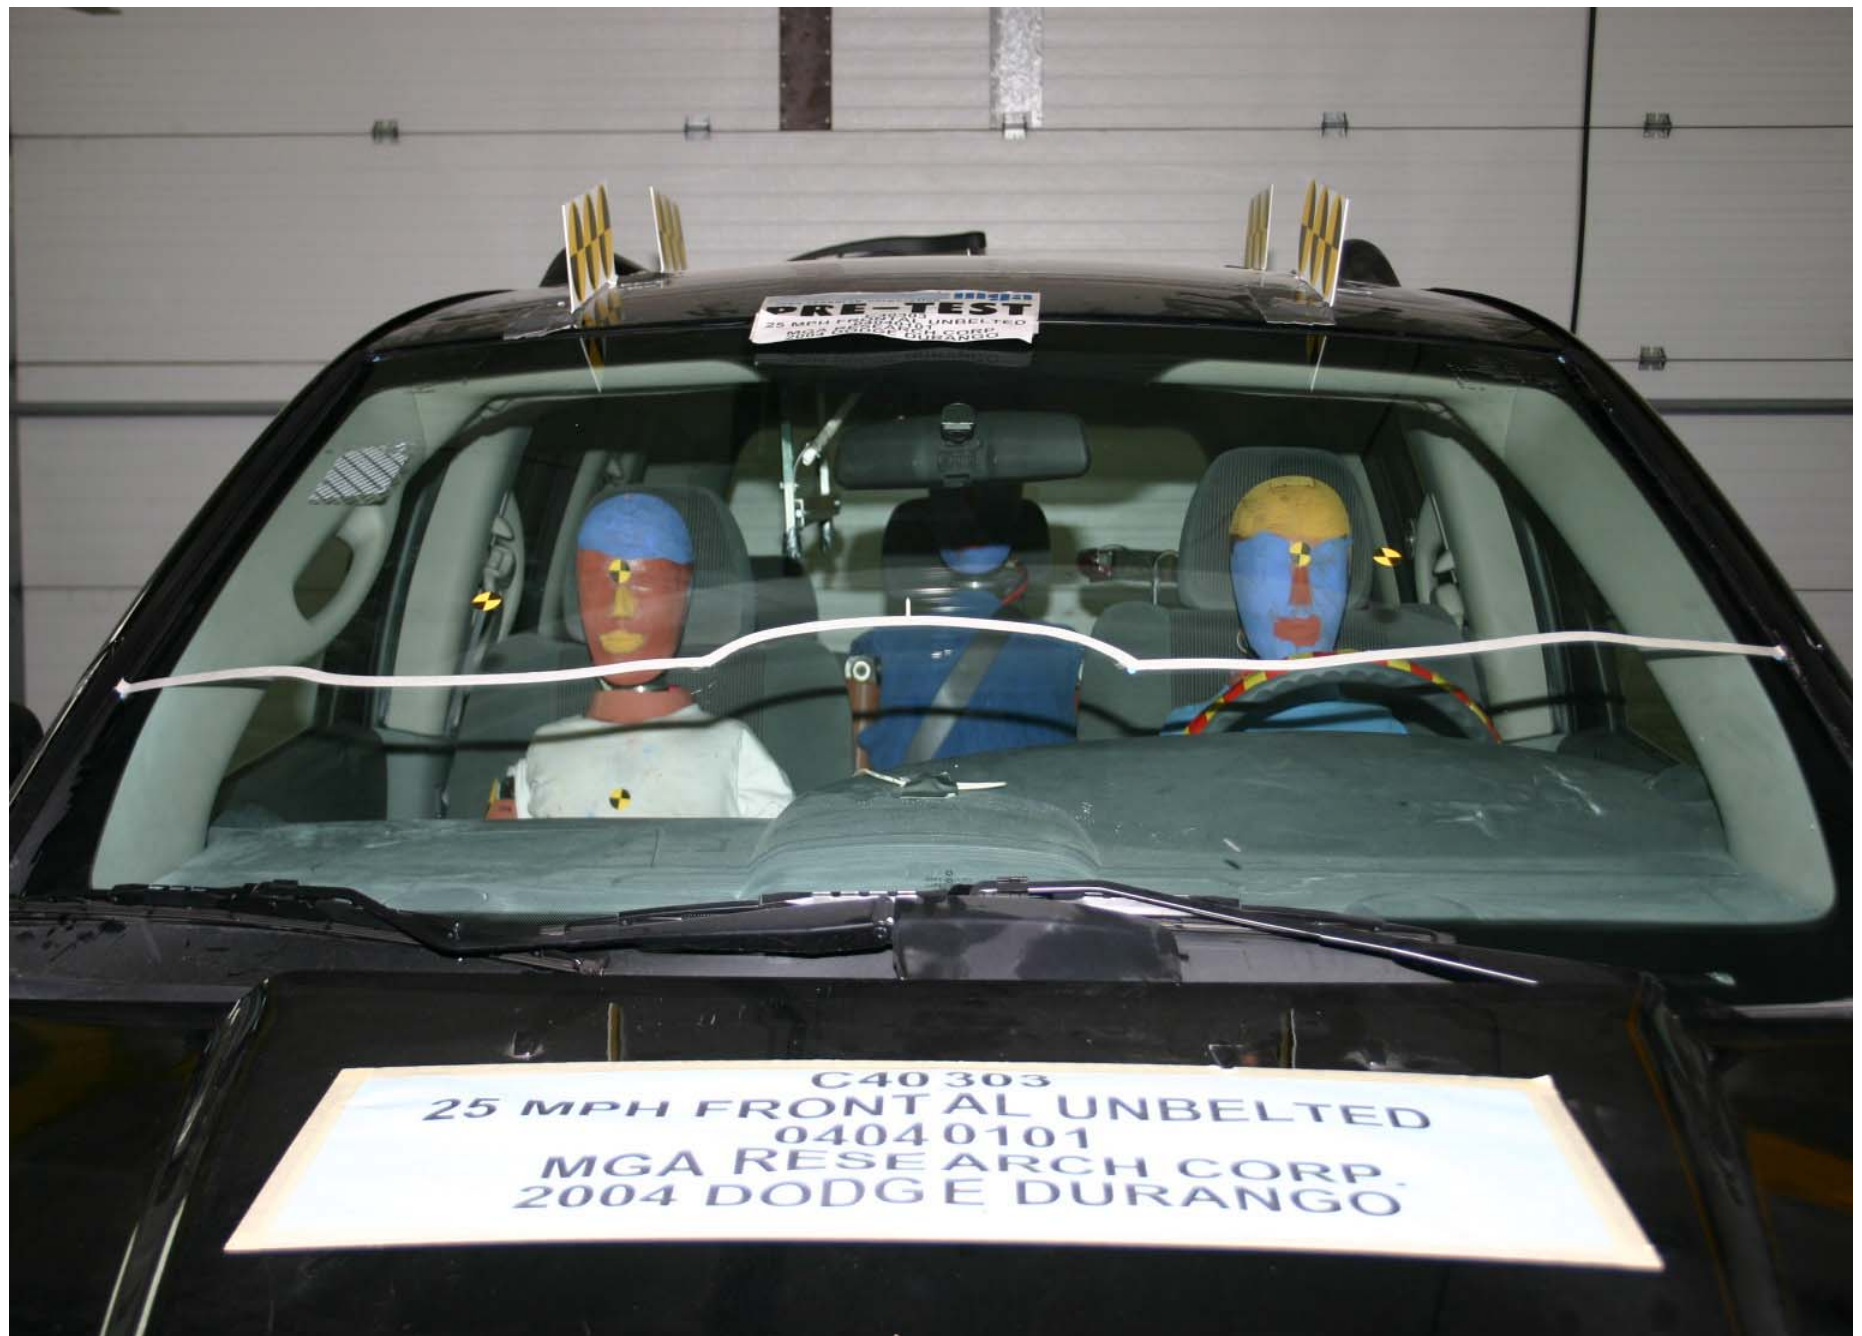


Pre-Test Windshield View



Post-Test Windshield View



Pre-Test Engine Compartment View

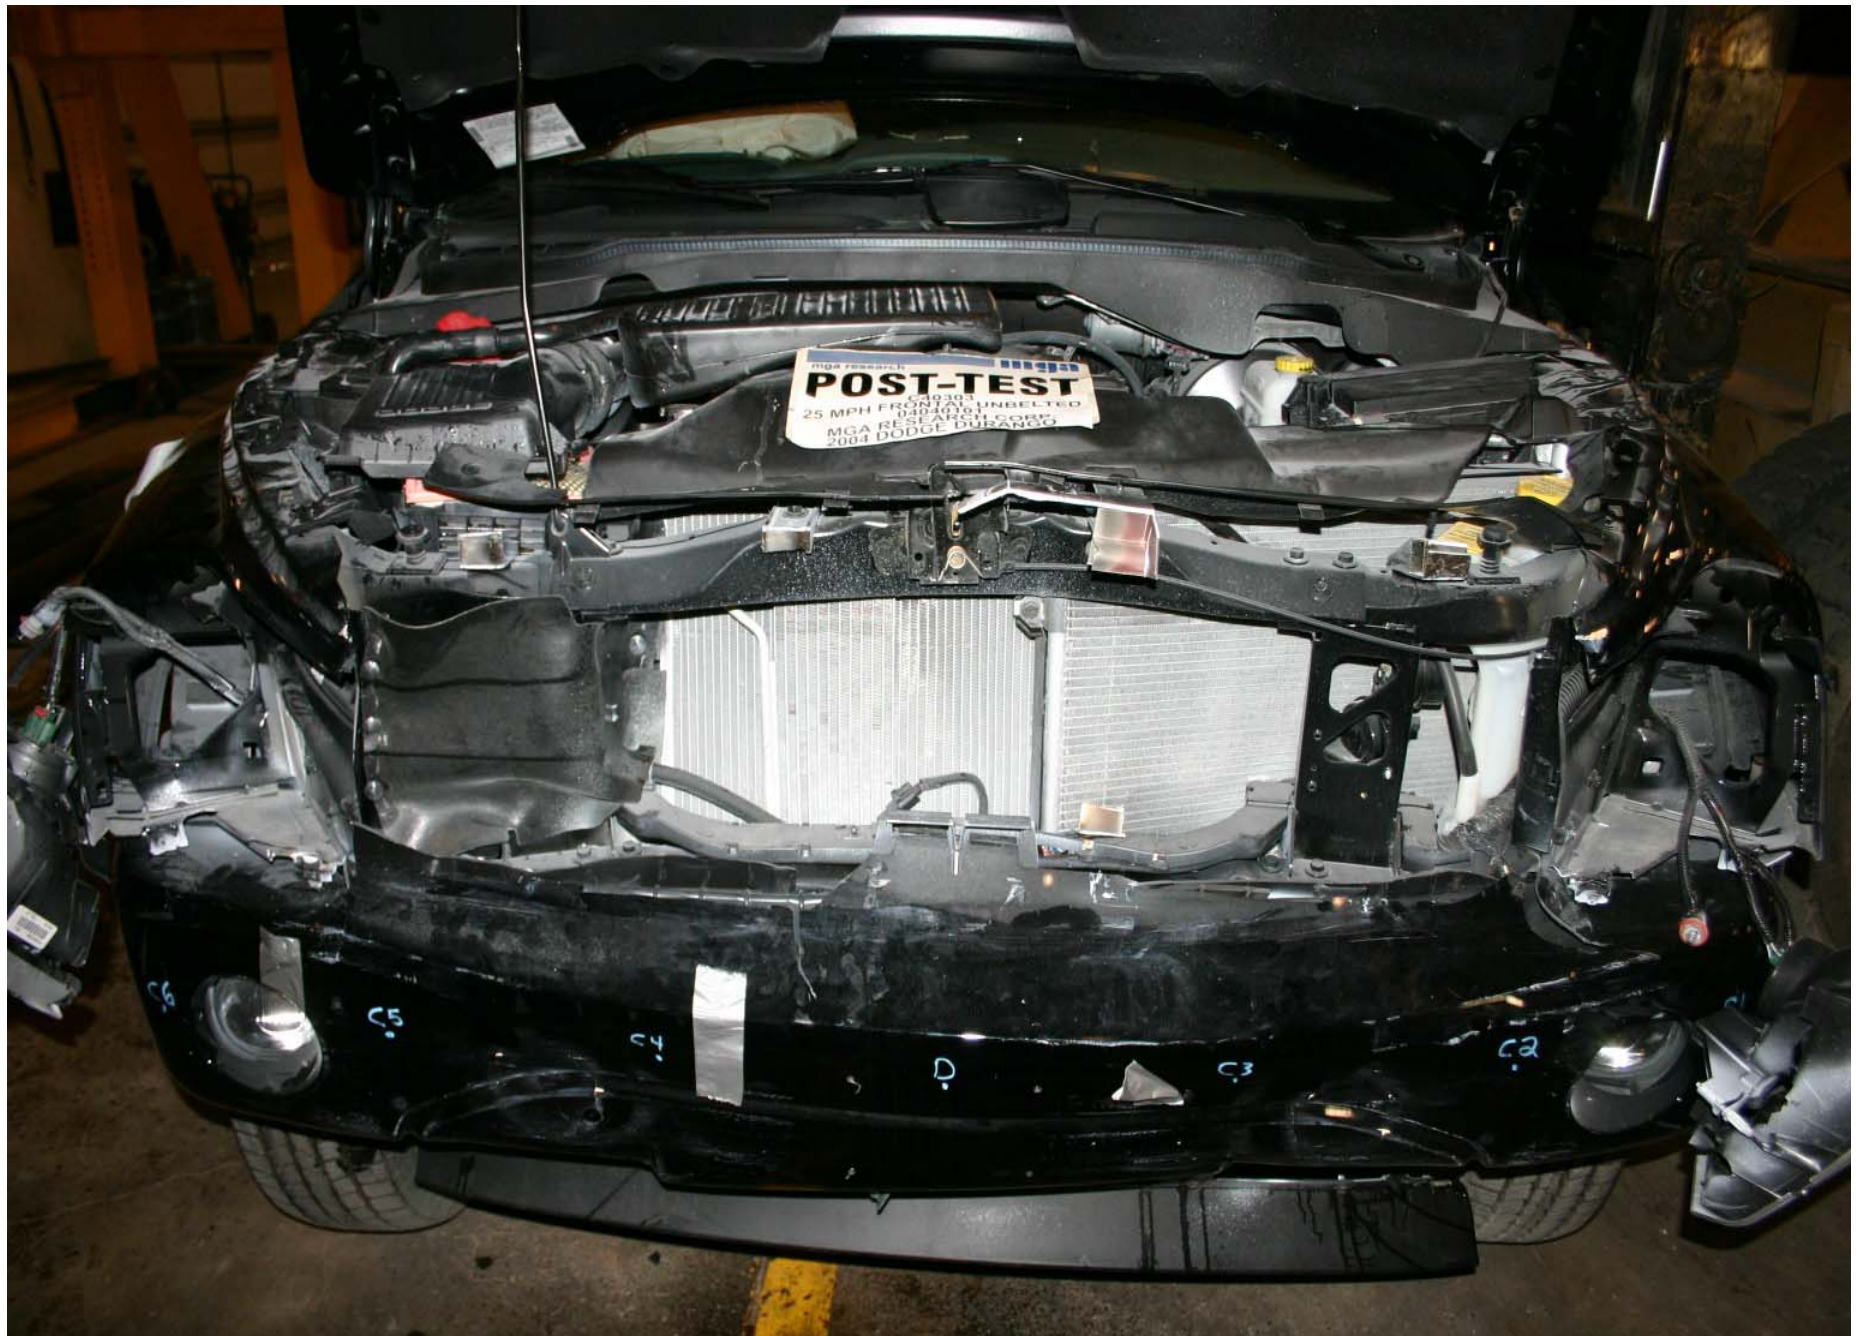


Post-Test Engine Compartment View



Pre-Test Fuel Filler Cap View



Post-Test Fuel Filler Cap View

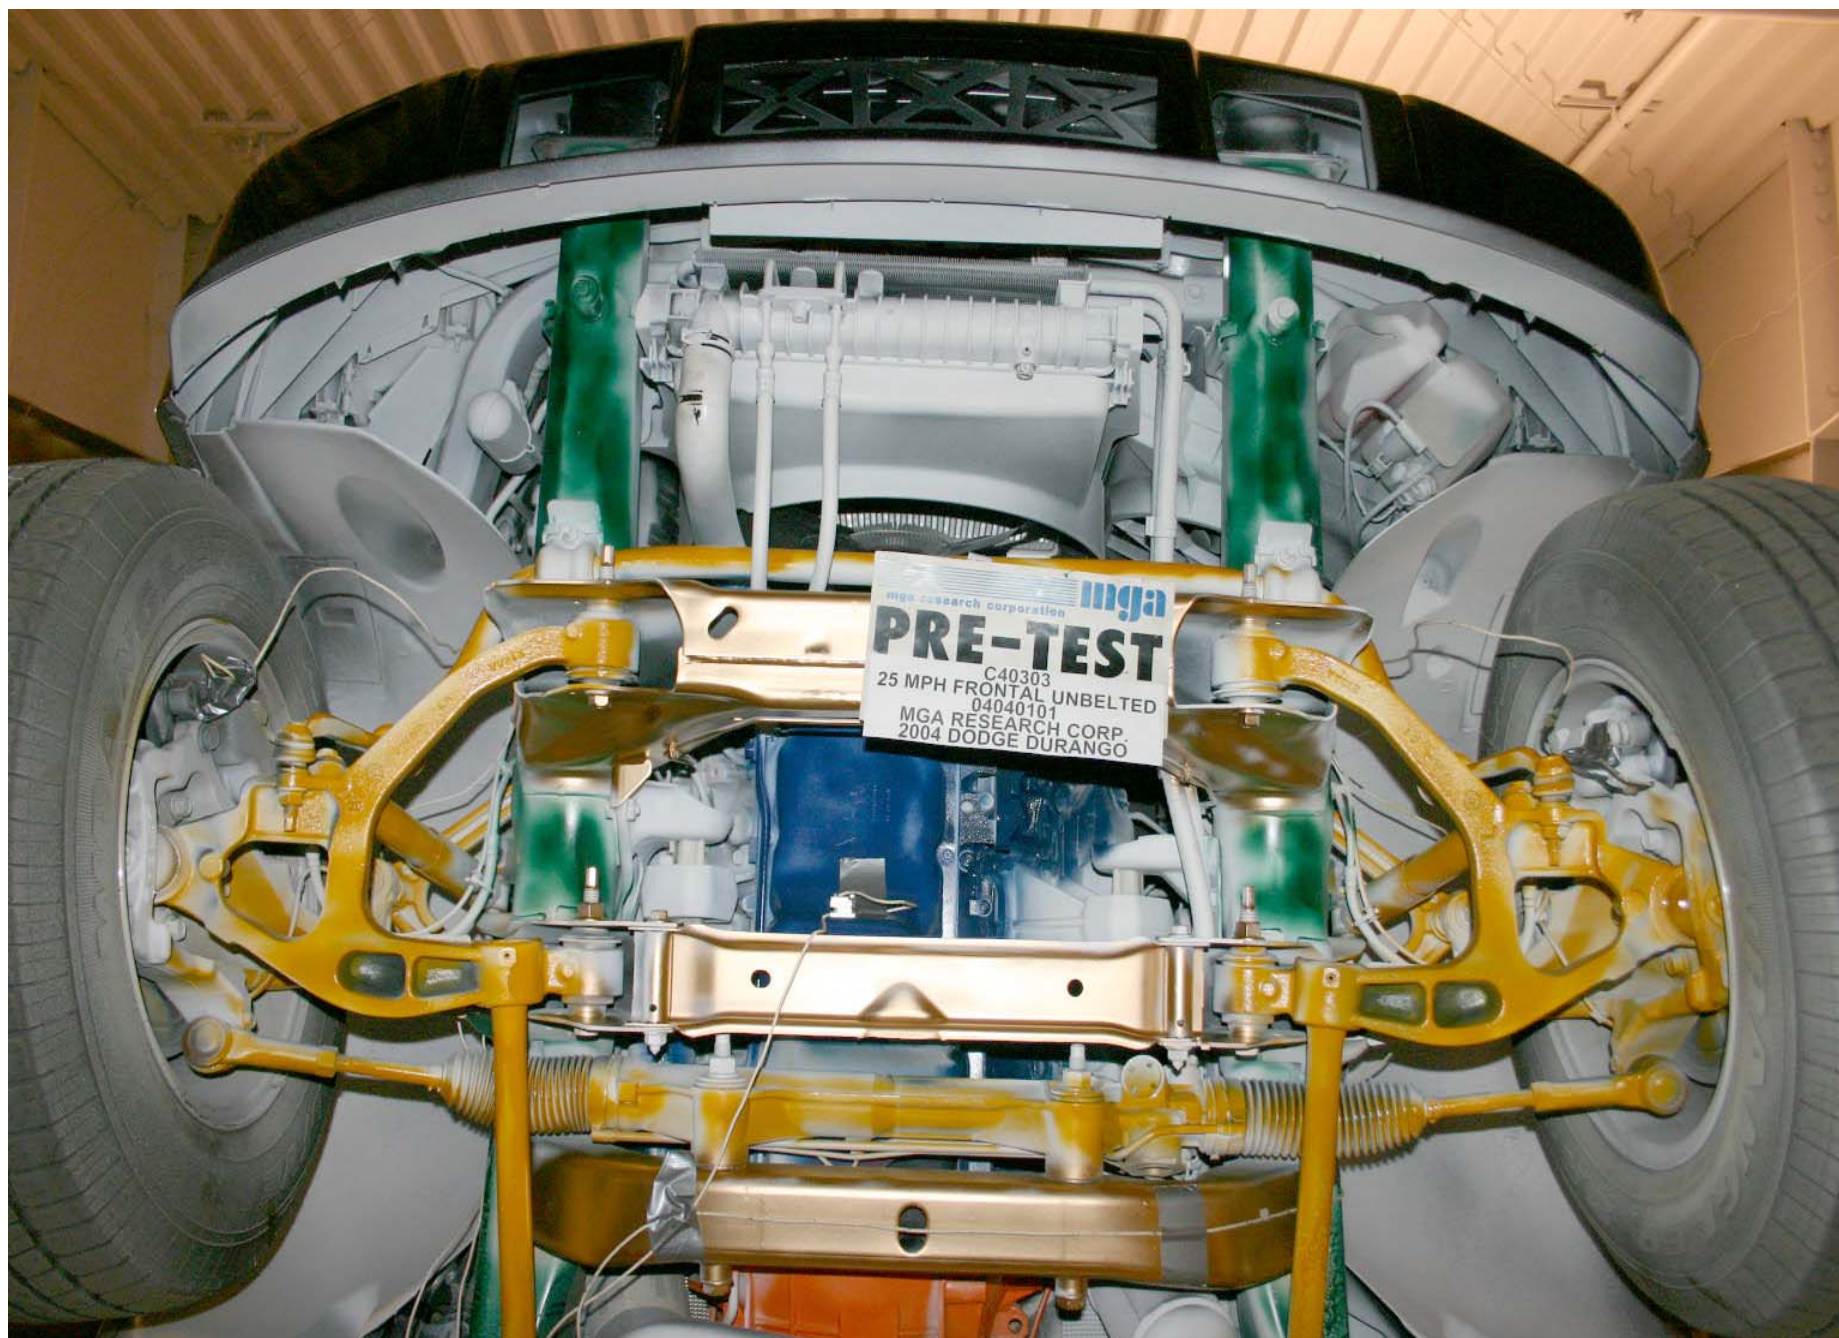

Pre-Test Front Underbody View



Post-Test Front Underbody View




C-22


Pre-Test Mid Front Underbody




Pre-Test Mid Rear Underbody

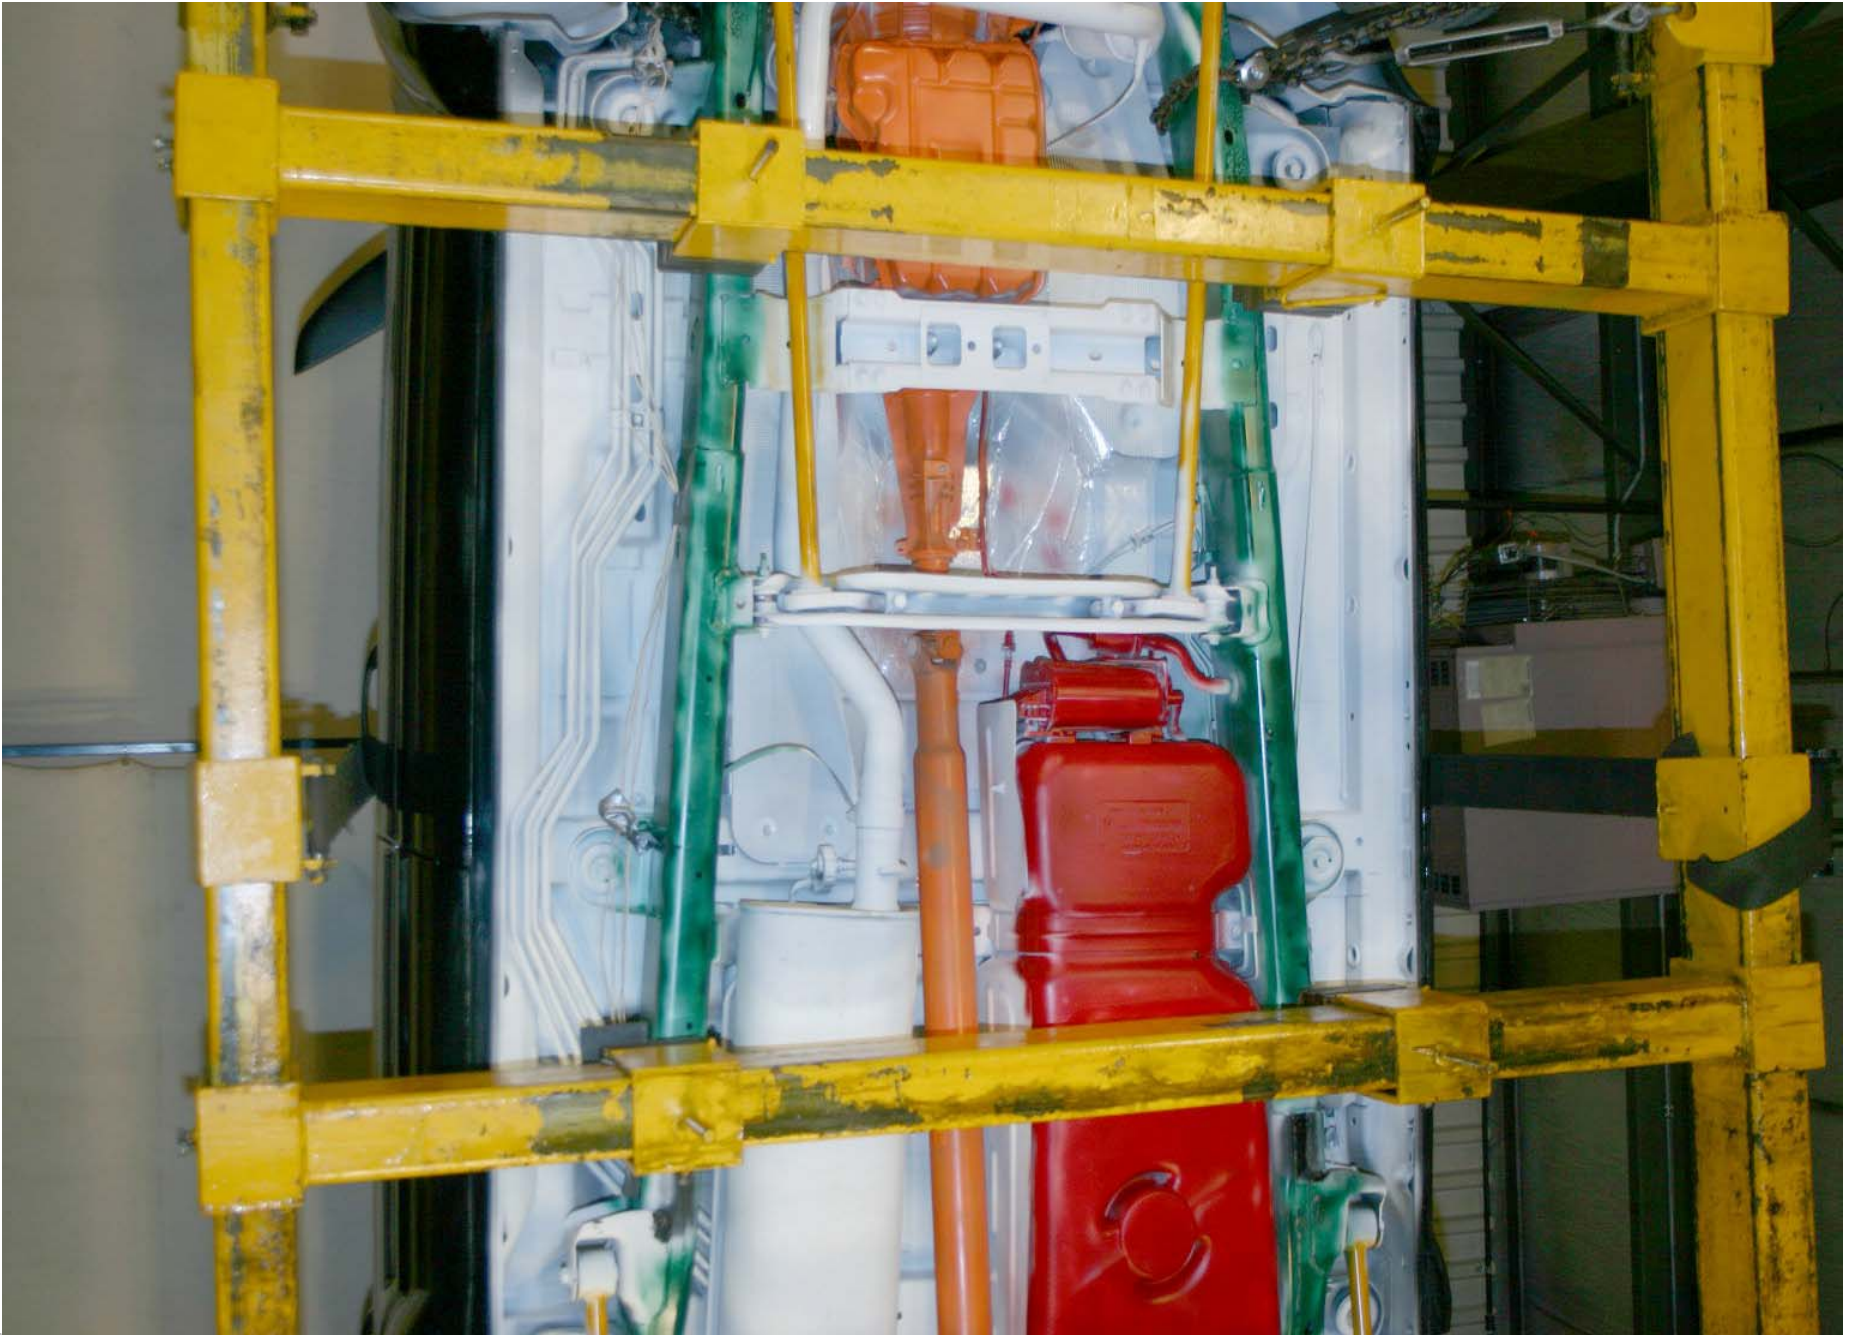

Post-Test Mid Underbody

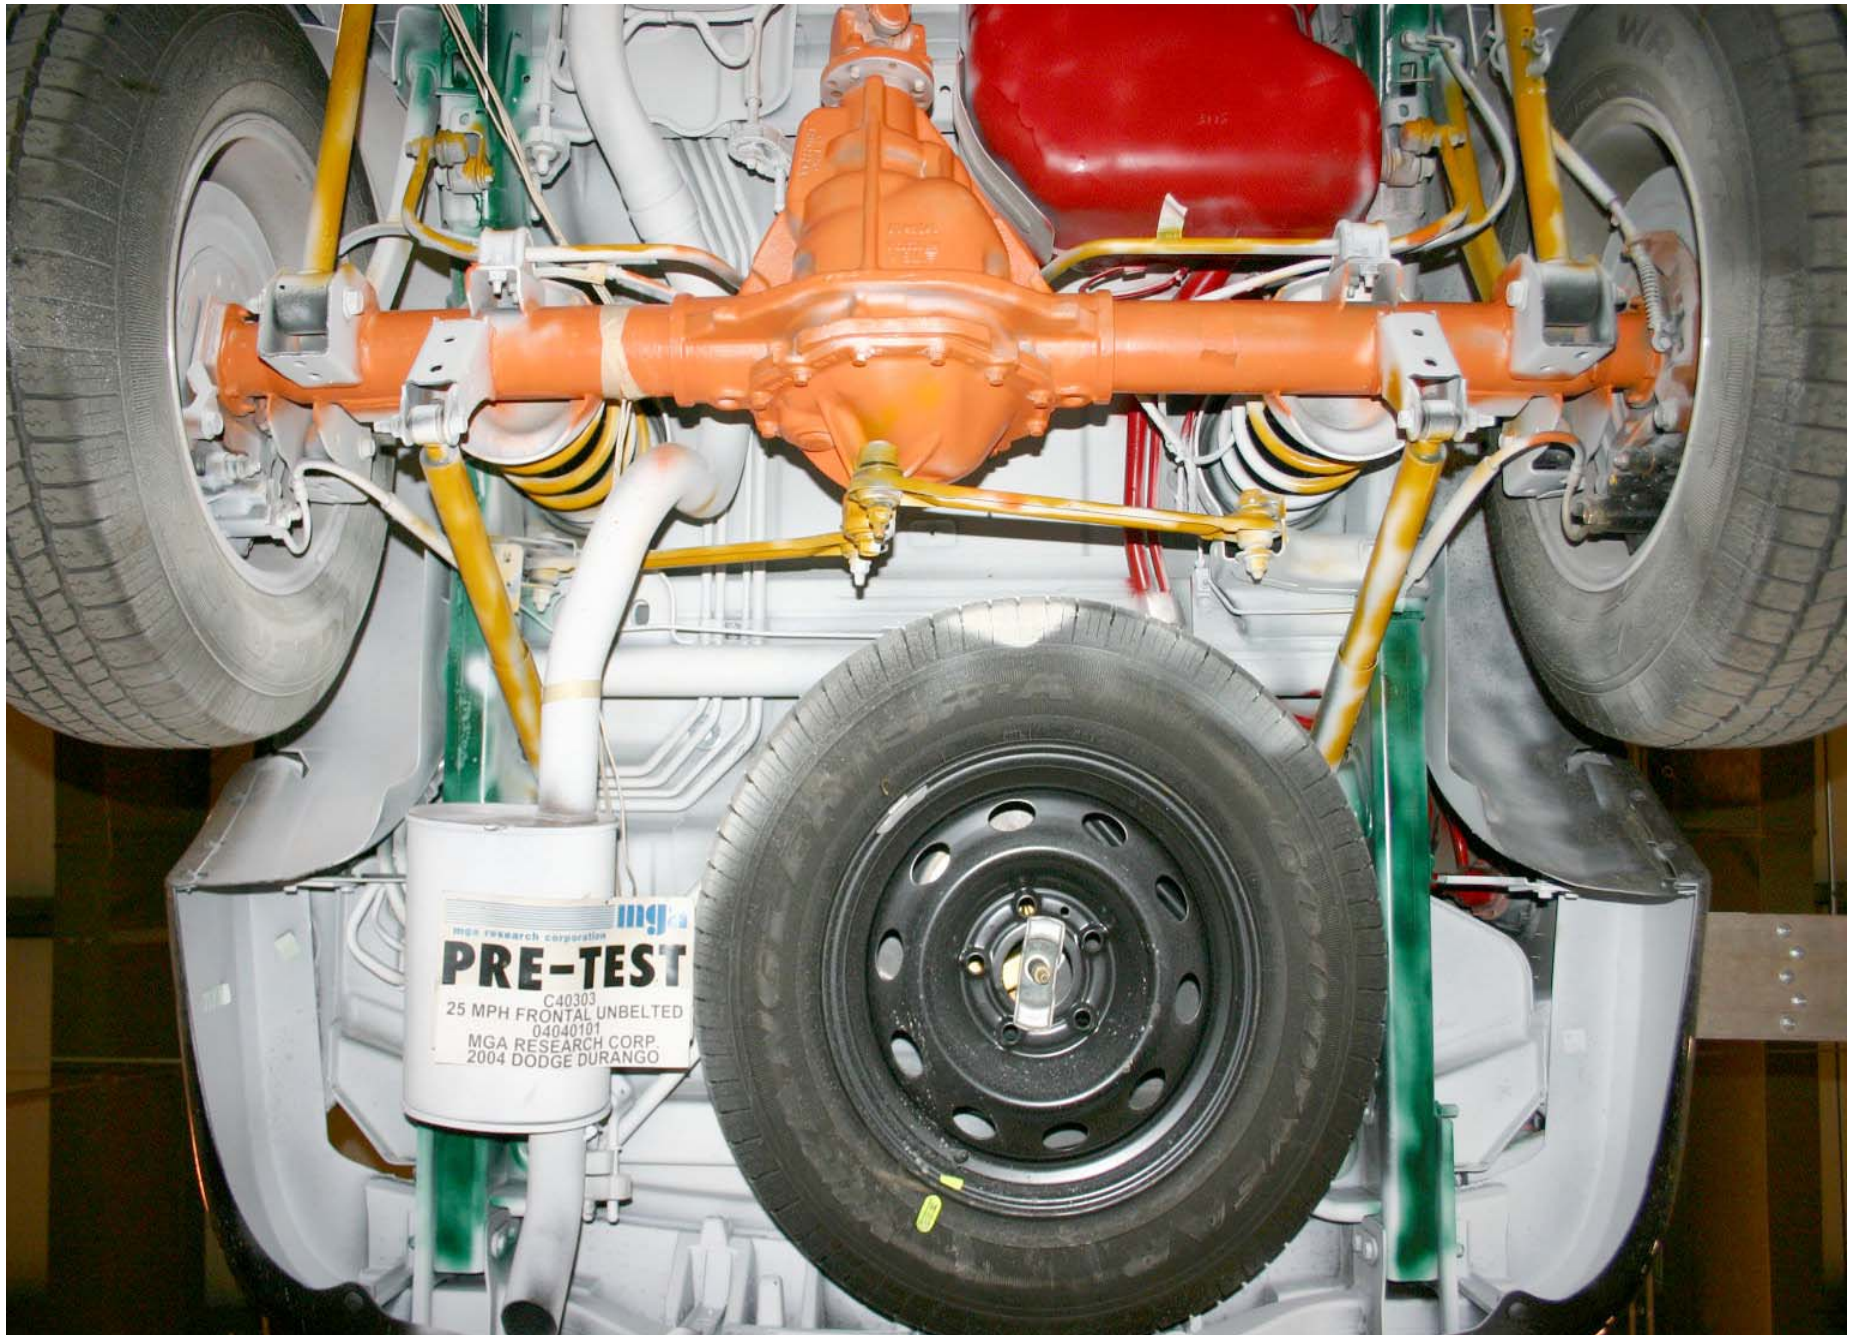


Pre-Test Rear Underbody View

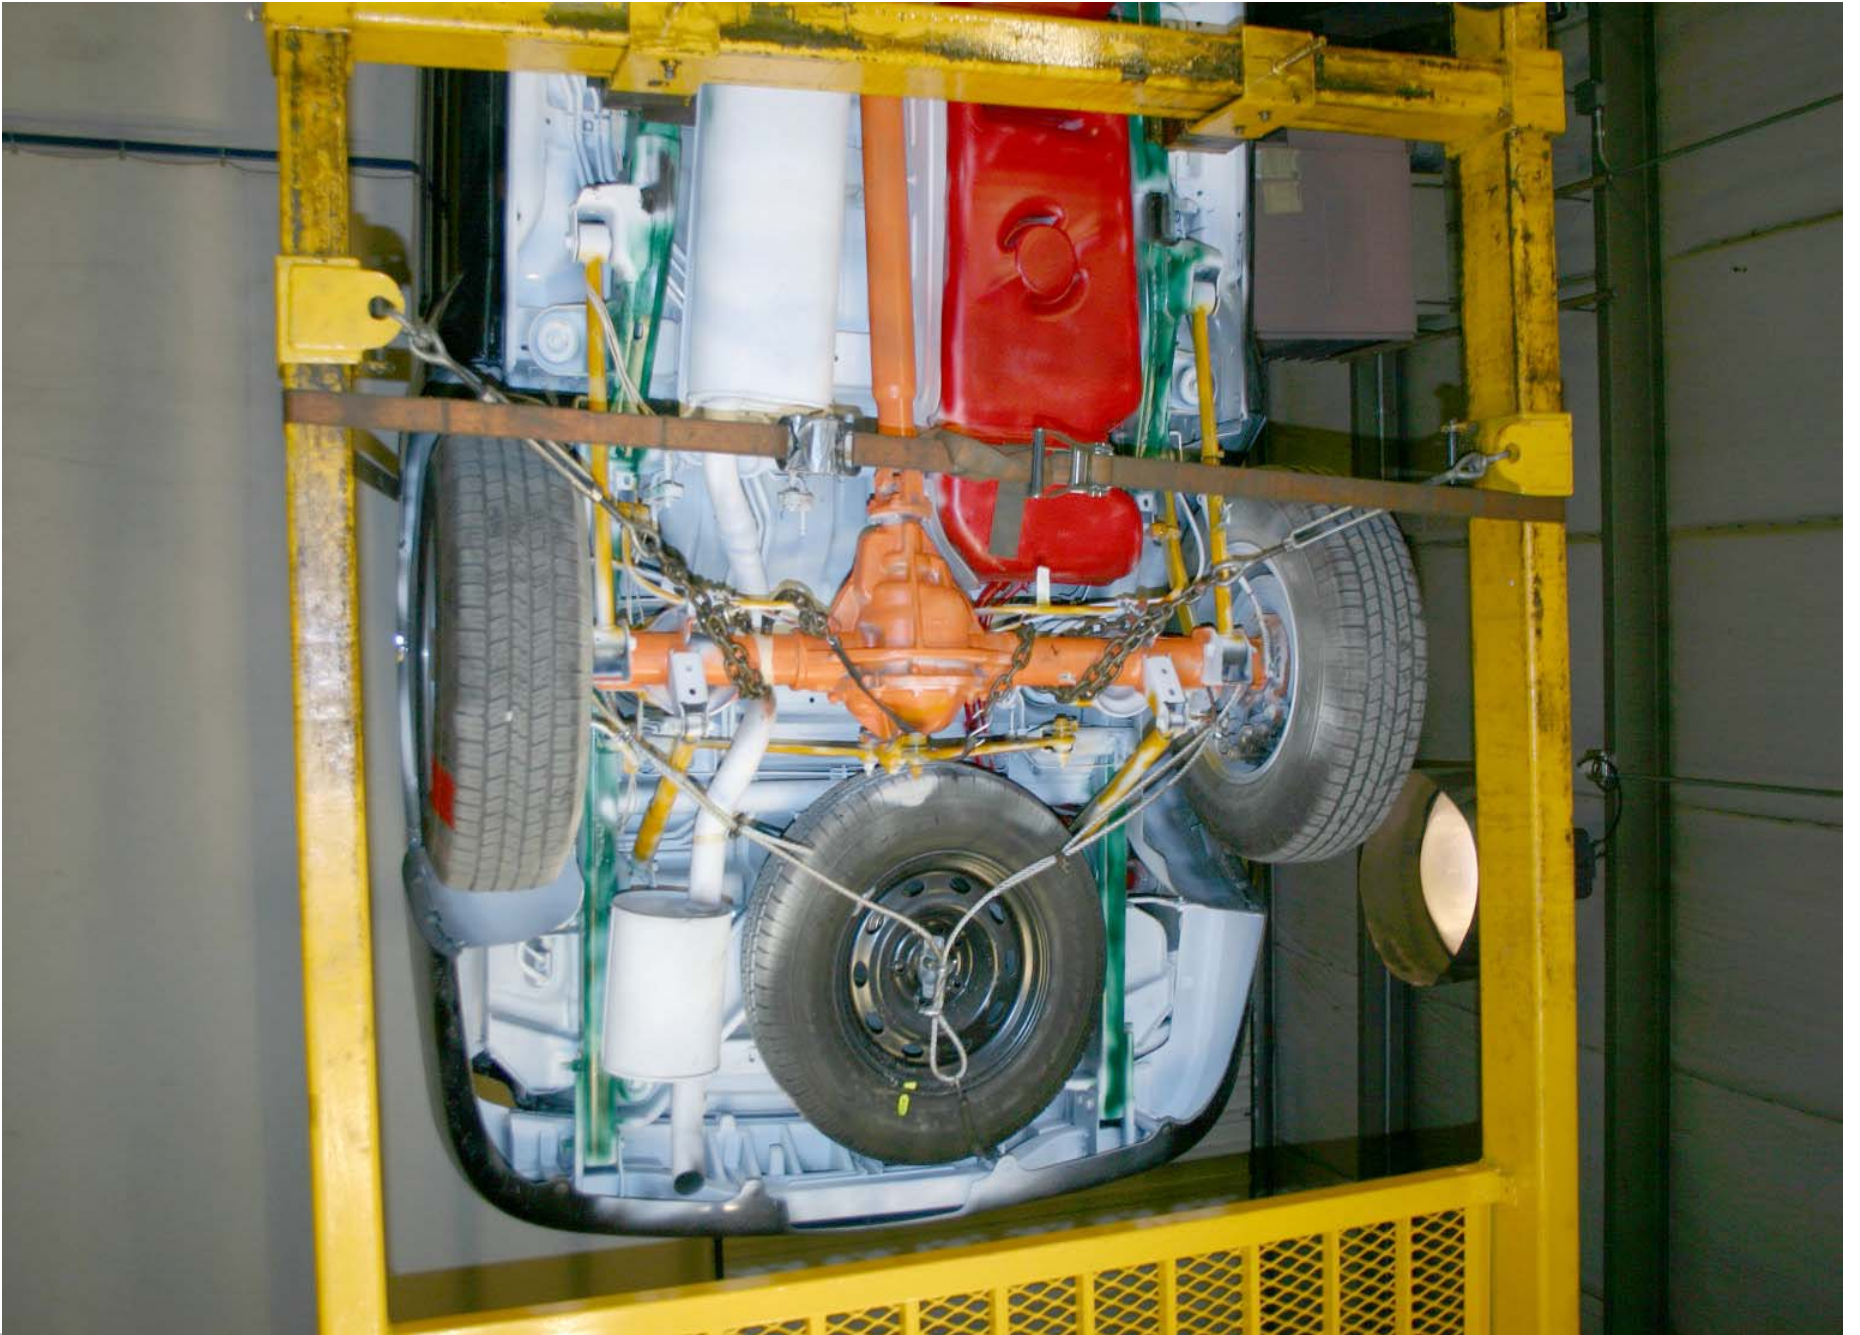

Post-Test Rear Underbody View



Pre-Test Driver Dummy Front View (head position)

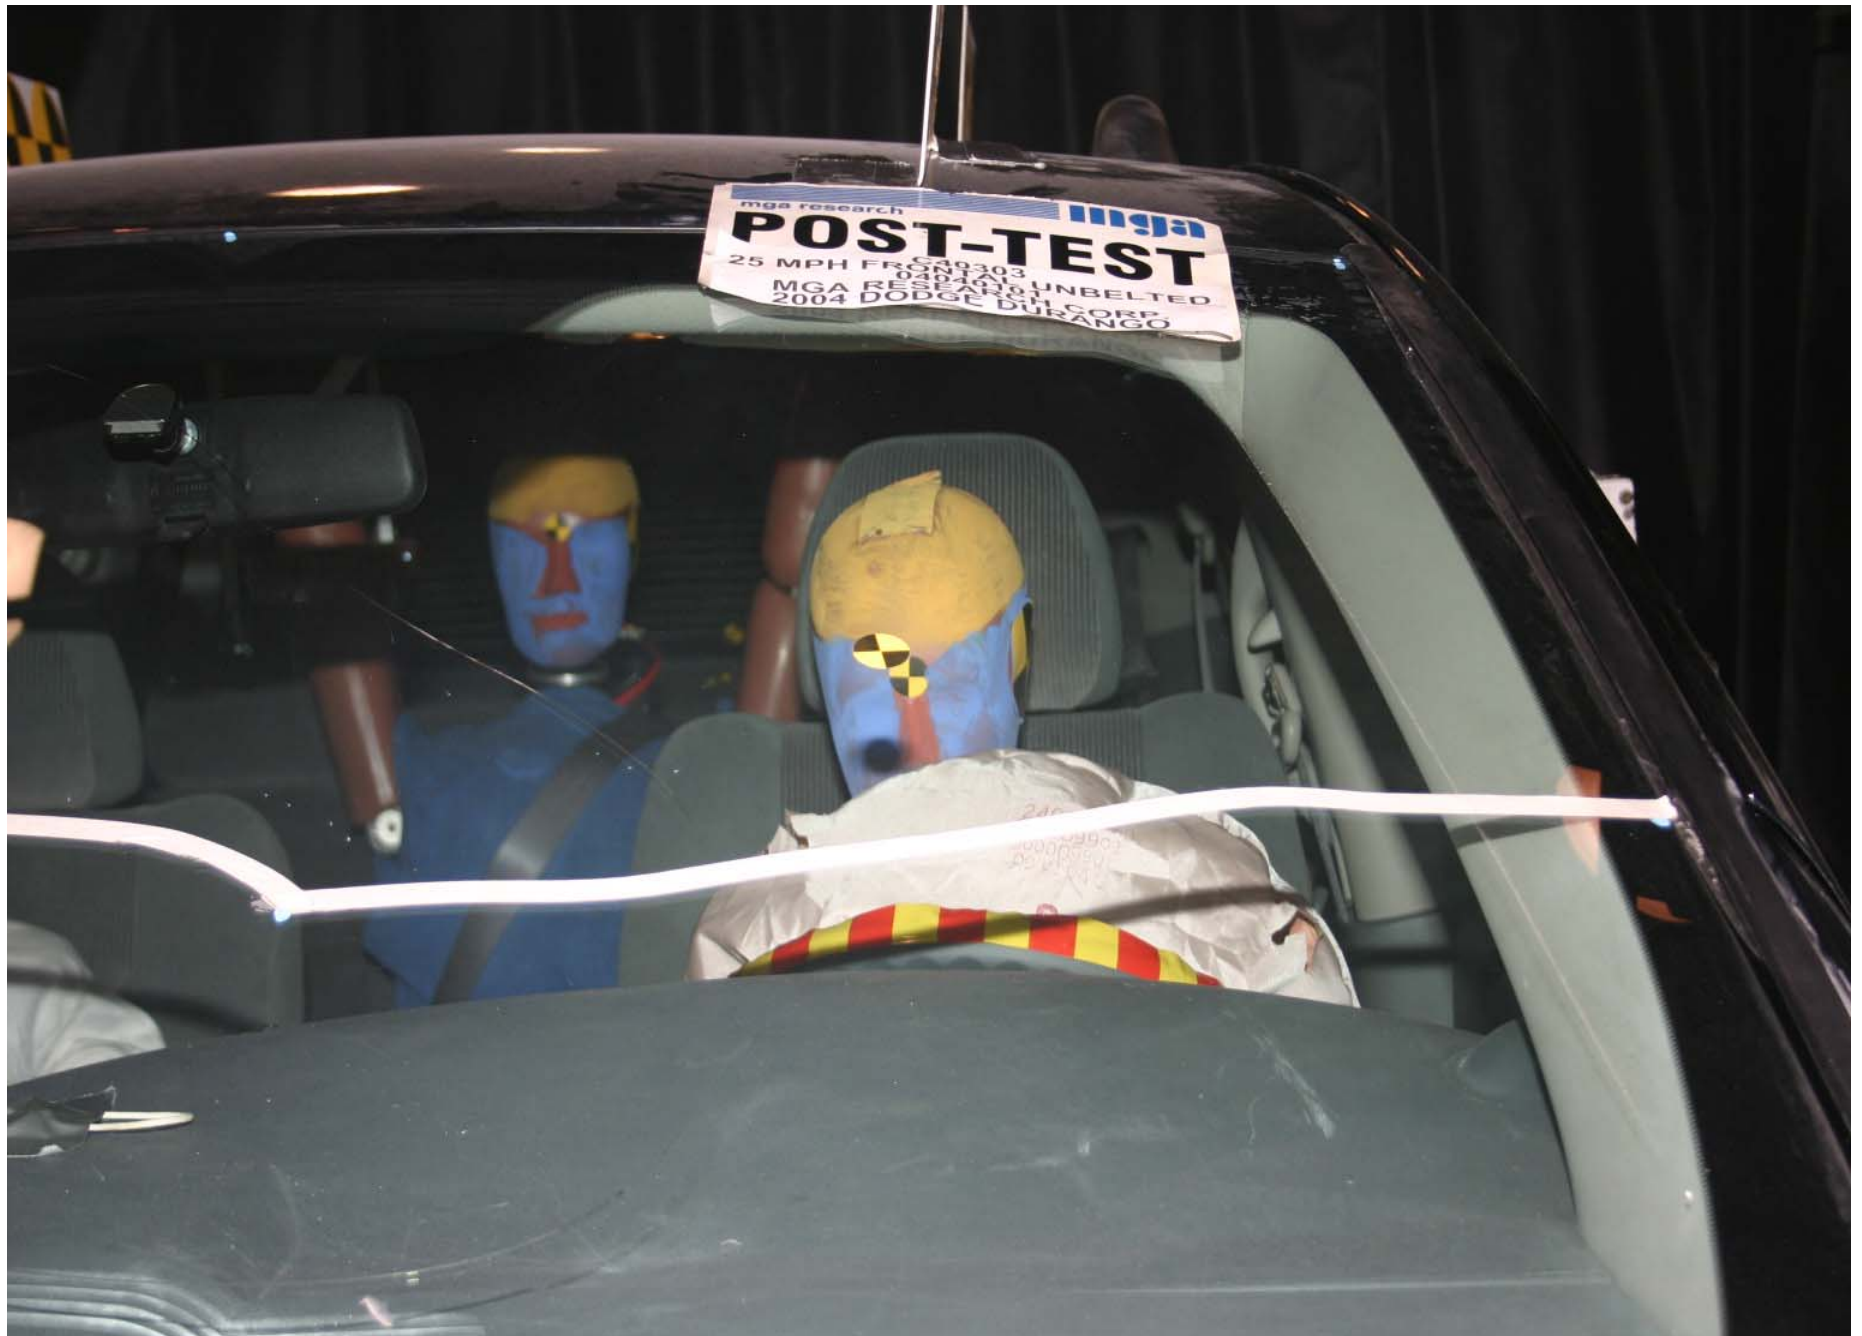

Post-Test Driver Dummy Front View (head position)



Pre-Test Driver Dummy Position Left Side View



Post-Test Driver Dummy Position Left Side View



Pre-Test Driver Dummy Position Left Side View (Door Open)

Post-Test Driver Dummy Position Left Side View (Door Open)



Pre-Test Driver Dummy Seat Position



Post-Test Driver Dummy Seat Position



Pre-Test Driver Dummy Feet Position



Post-Test Driver Dummy Feet Position



Pre-Test Driver Side Knee Bolster View



Post-Test Driver Side Knee Bolster View




Post-Test Driver Dummy Head Contact



Post-Test Driver Dummy Knee Contact




Post-Test Driver Dummy Airbag Contact

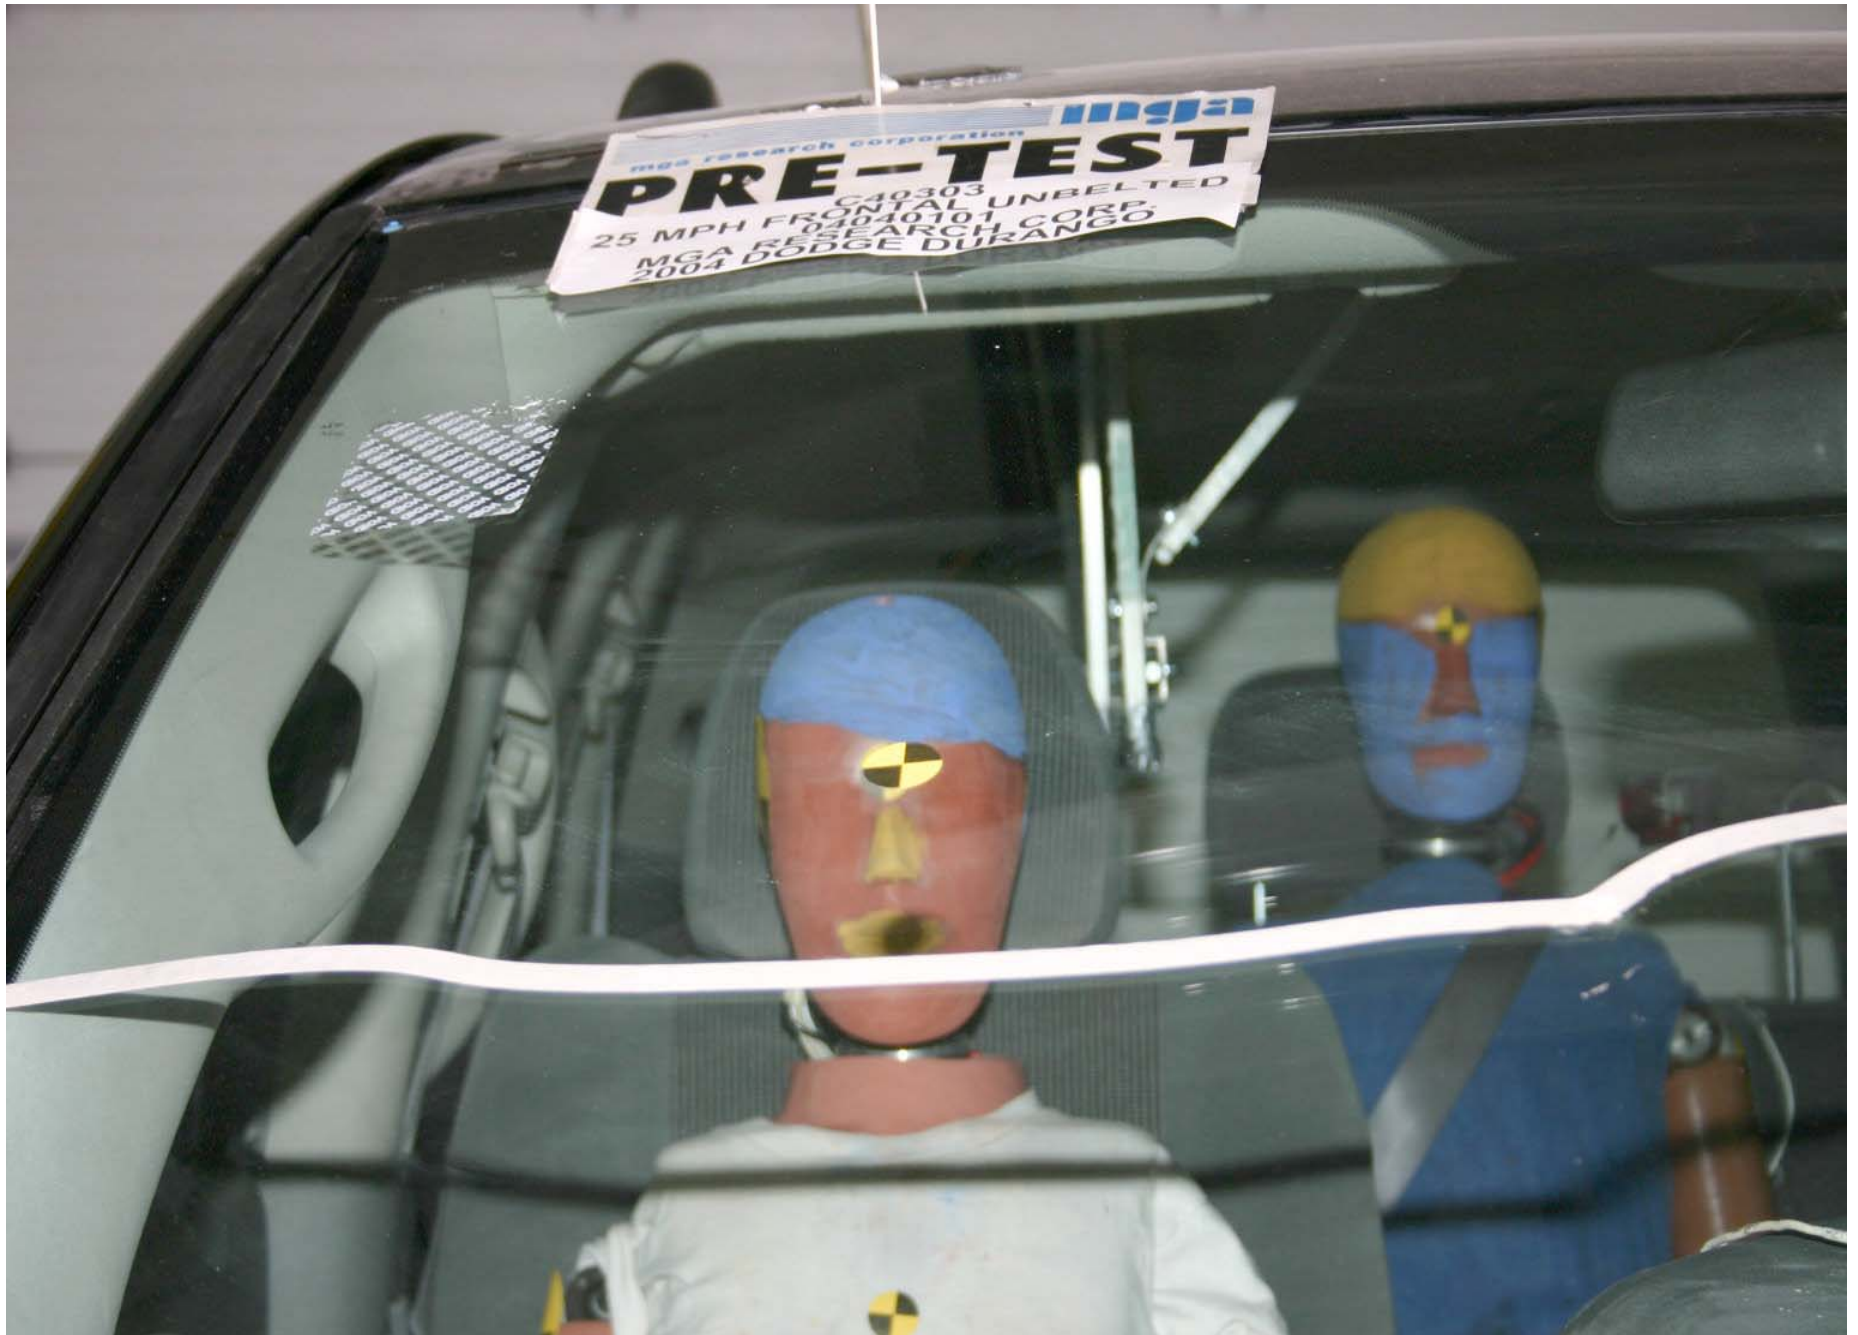

Pre-Test Passenger Dummy Front View (head position)



Post-Test Passenger Dummy Front View (head position)

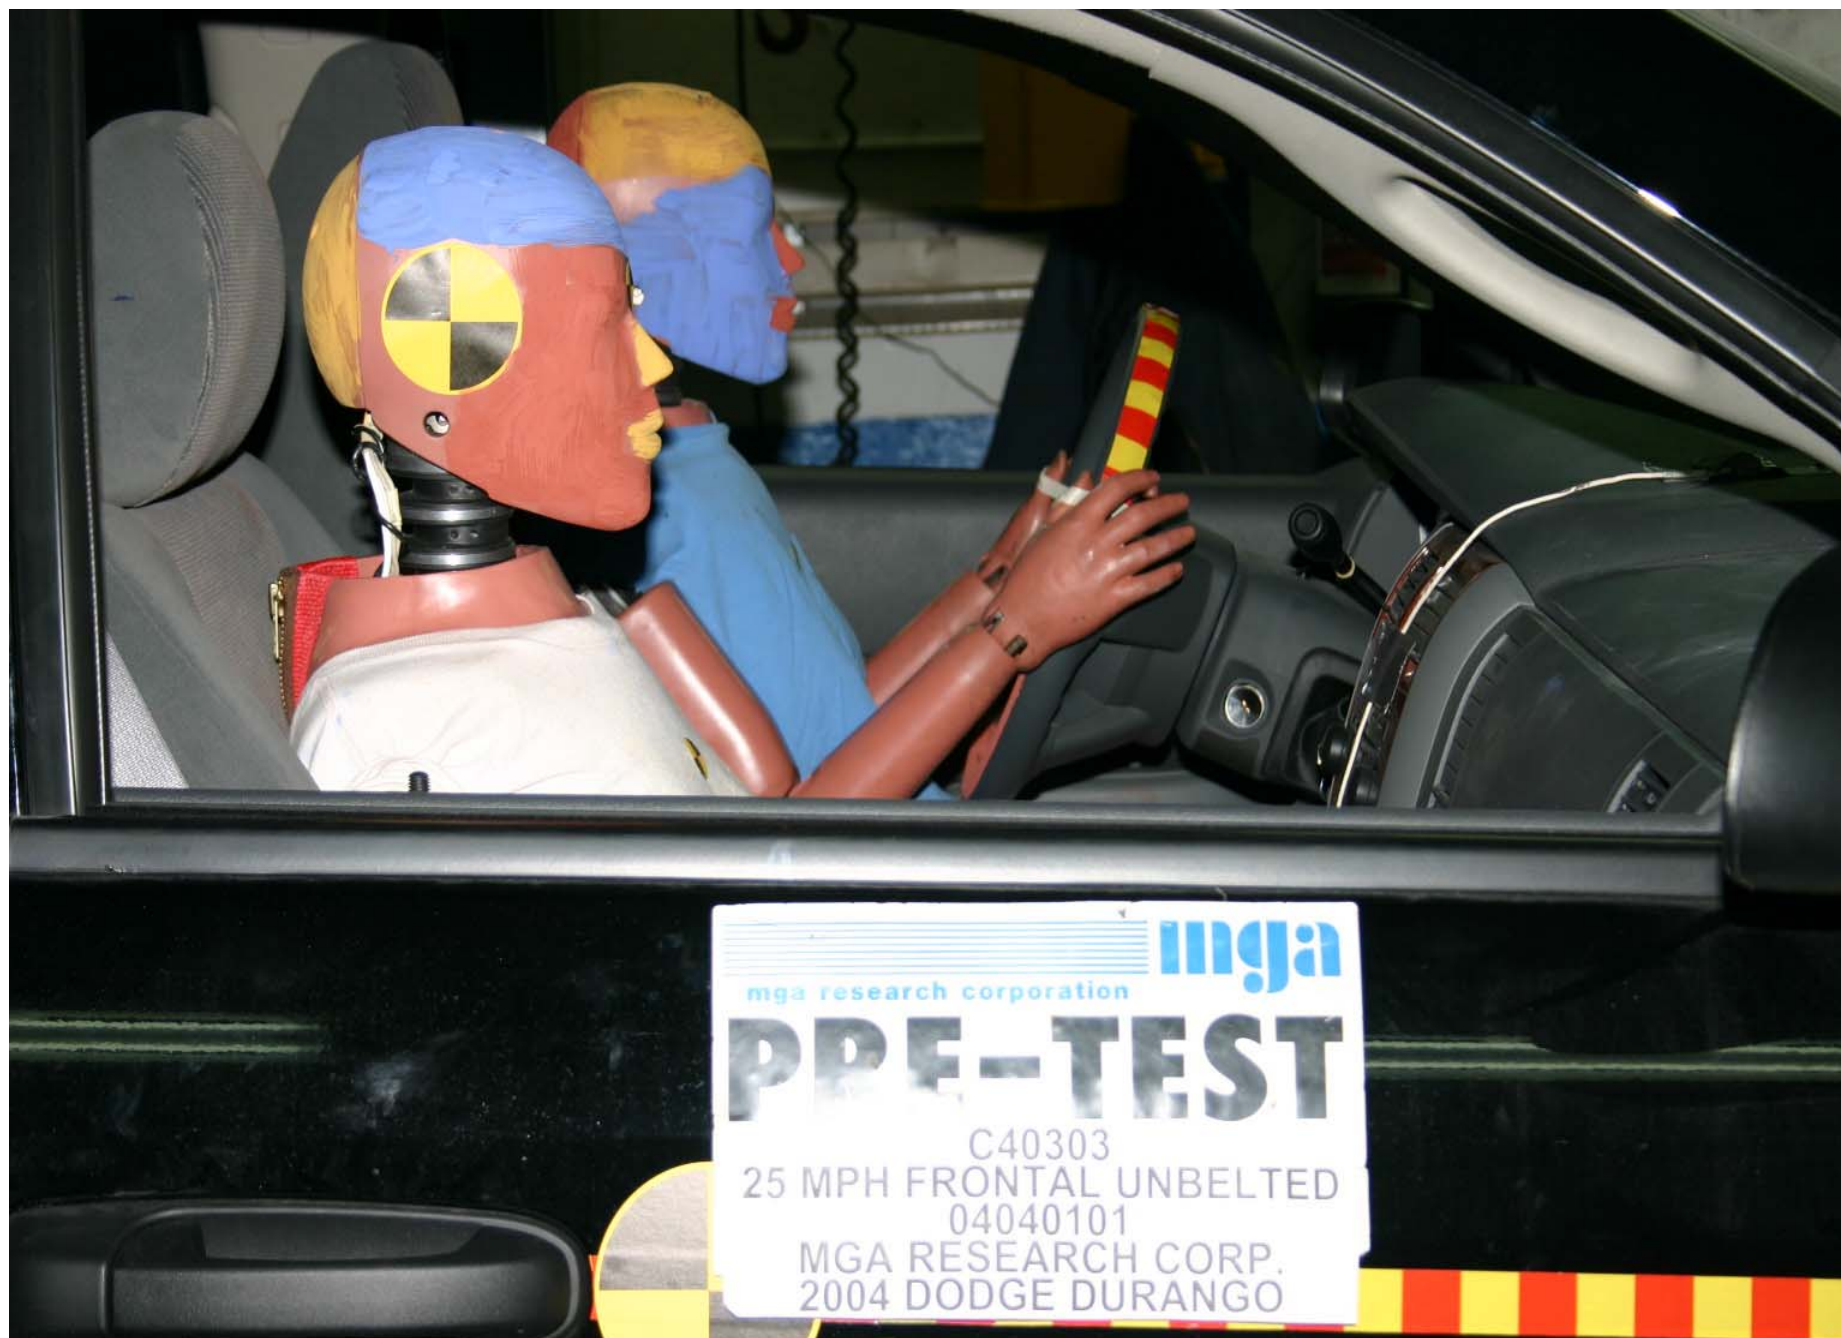

Pre-Test Passenger Dummy Position Right Side View



Post-Test Passenger Dummy Position Right Side View



Pre-Test Passenger Dummy Position Right Side View (Door Open)



Post-Test Passenger Dummy Position Right Side View (Door Open)



Pre-Test Passenger Dummy Seat Position



Post-Test Passenger Dummy Seat Position


Pre-Test Passenger Dummy Feet Position



Post-Test Passenger Dummy Feet Position



Pre-Test Passenger Side Knee Bolster View

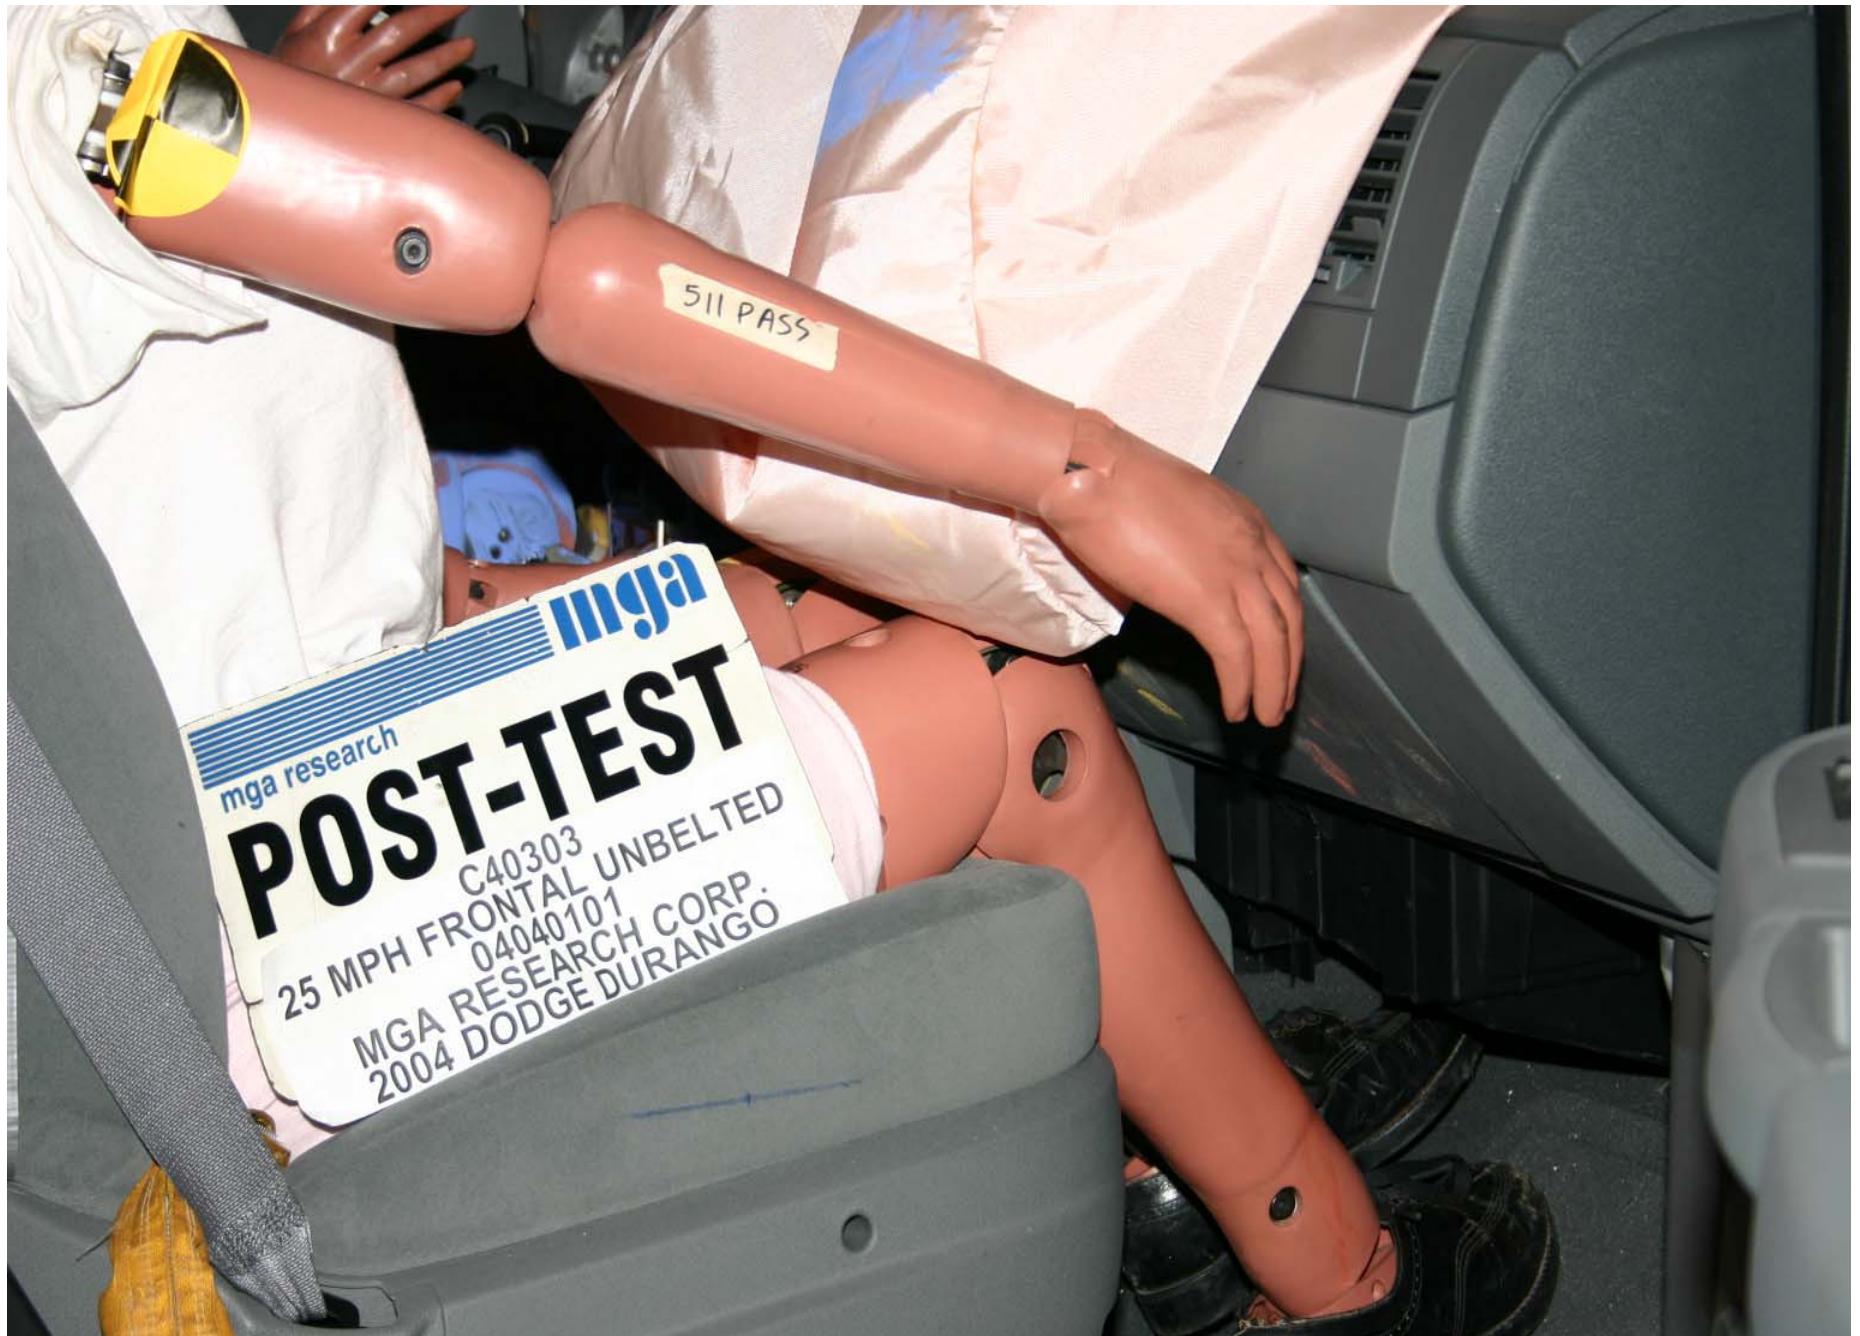

Post-Test Passenger Side Knee Bolster View



Post-Test Passenger Dummy Head Contact



Post-Test Passenger Dummy Knee Contact



Post-Test Passenger Dummy Airbag Contact



Pre-Test CRP Dummy Front View (head position)



Post-Test CRP Dummy Front View (head position)



Pre-Test CRP Dummy Position Left Side View



Post-Test CRP Dummy Position Left Side View



Post-Test CRP Dummy Position Right Side View



Pre-Test CRP Dummy Position Left Side View (Door Open)



Post-Test CRP Dummy Position Left Side View (Door Open)



Pre-Test CRP Dummy Position Right Side View (Door Open)



Post-Test CRP Dummy Position Right Side View (Door Open)



Pre-Test CRP Dummy Left Foot Position



Post-Test CRP Dummy Left Foot Position



Pre-Test CRP Dummy Right Foot Position



Post-Test CRP Dummy Right Foot Position



Pre-Test CRP Left Side Knee Bolster View



Post-Test CRP Left Side Knee Bolster View



Pre-Test CRP Right Side Knee Bolster View



Post-Test CRP Right Side Knee Bolster View



Post-Test CRP Dummy Knee Contact




LH and RH MHD Sensor Position



Rollover 90 Degrees



Rollover 180 Degrees

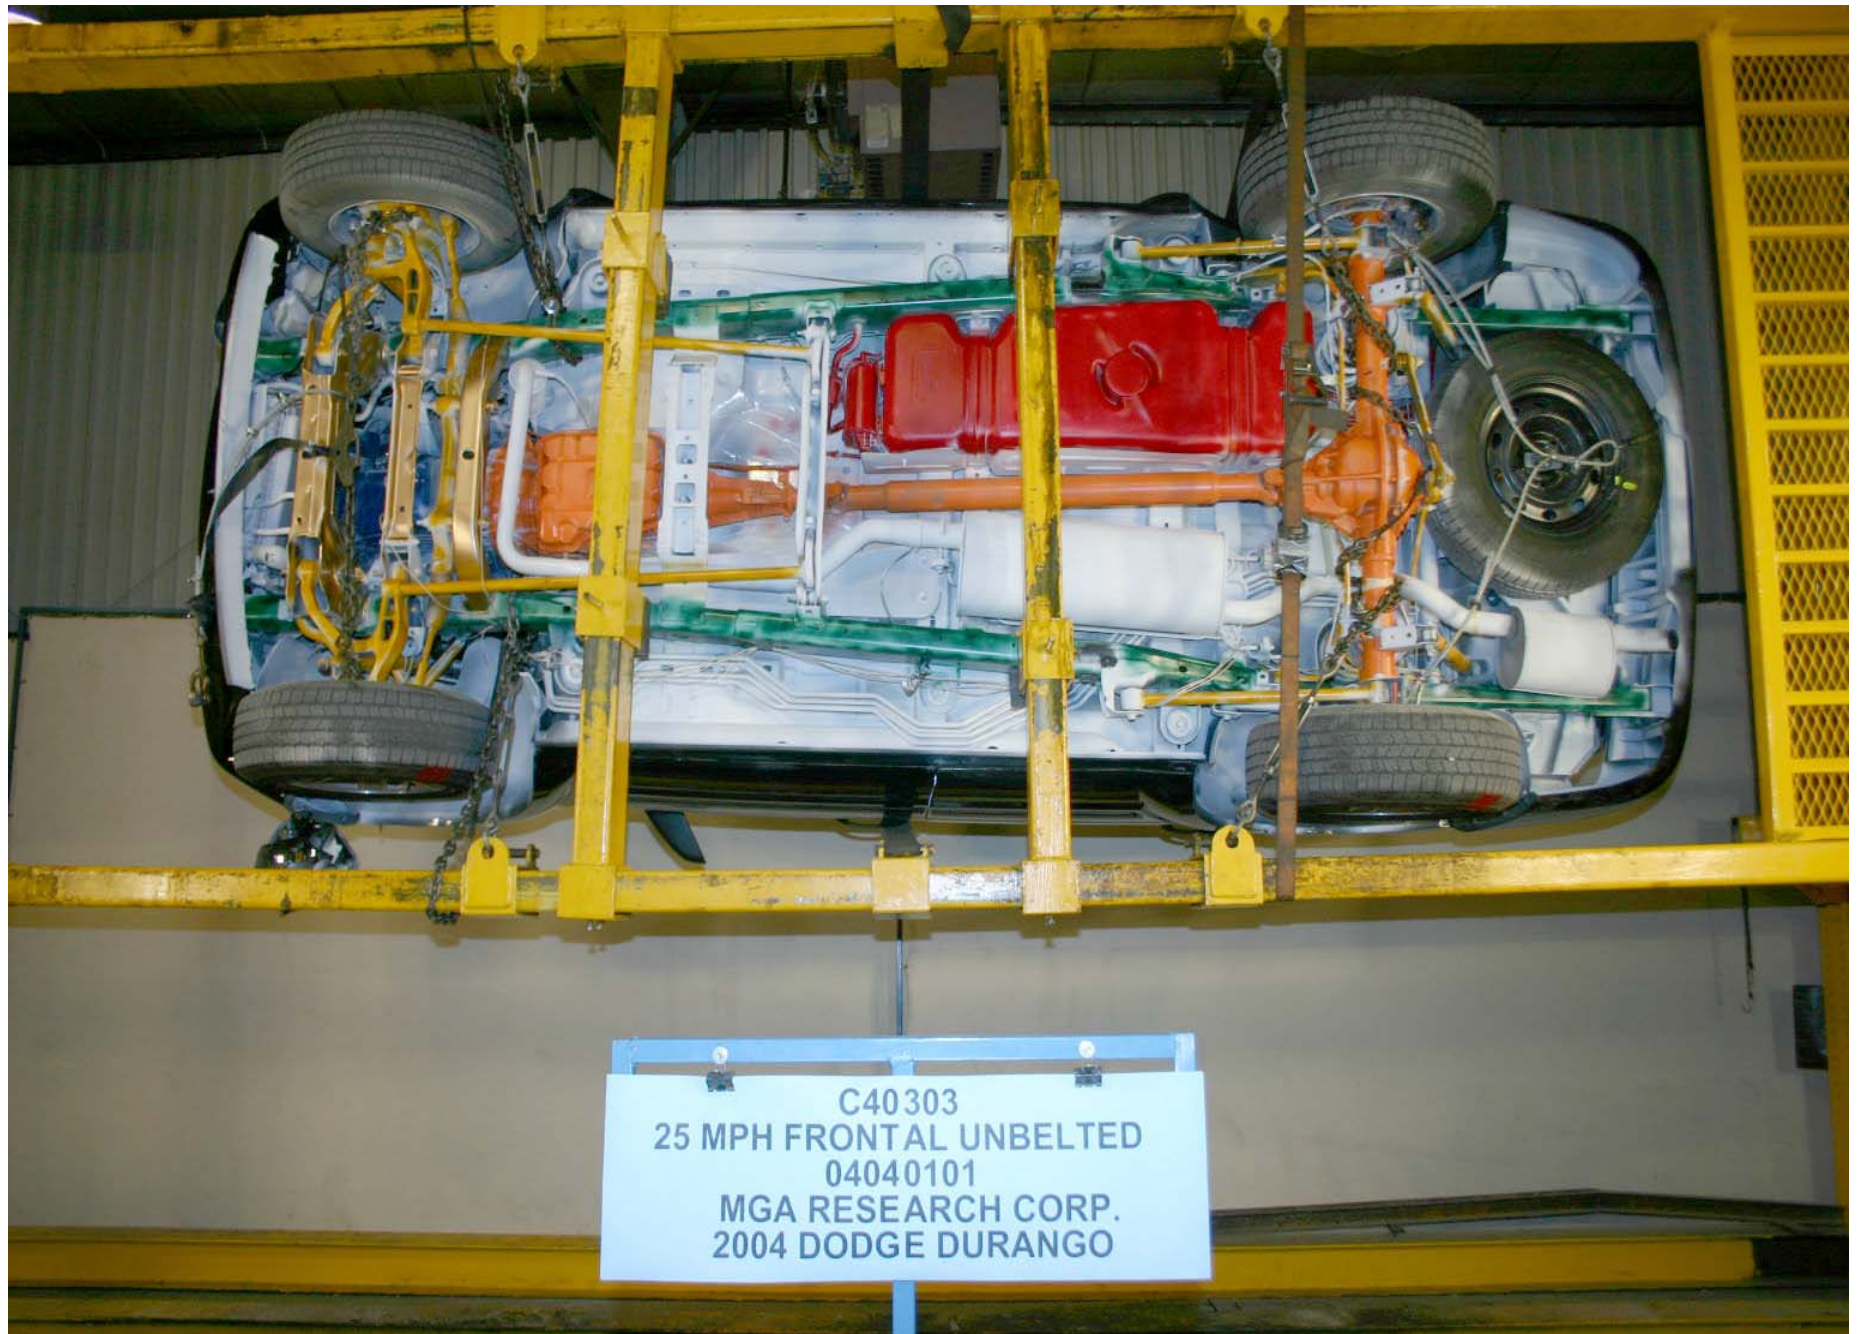


Rollover 270 Degrees



Rollover 360 Degrees



Vehicle Impact

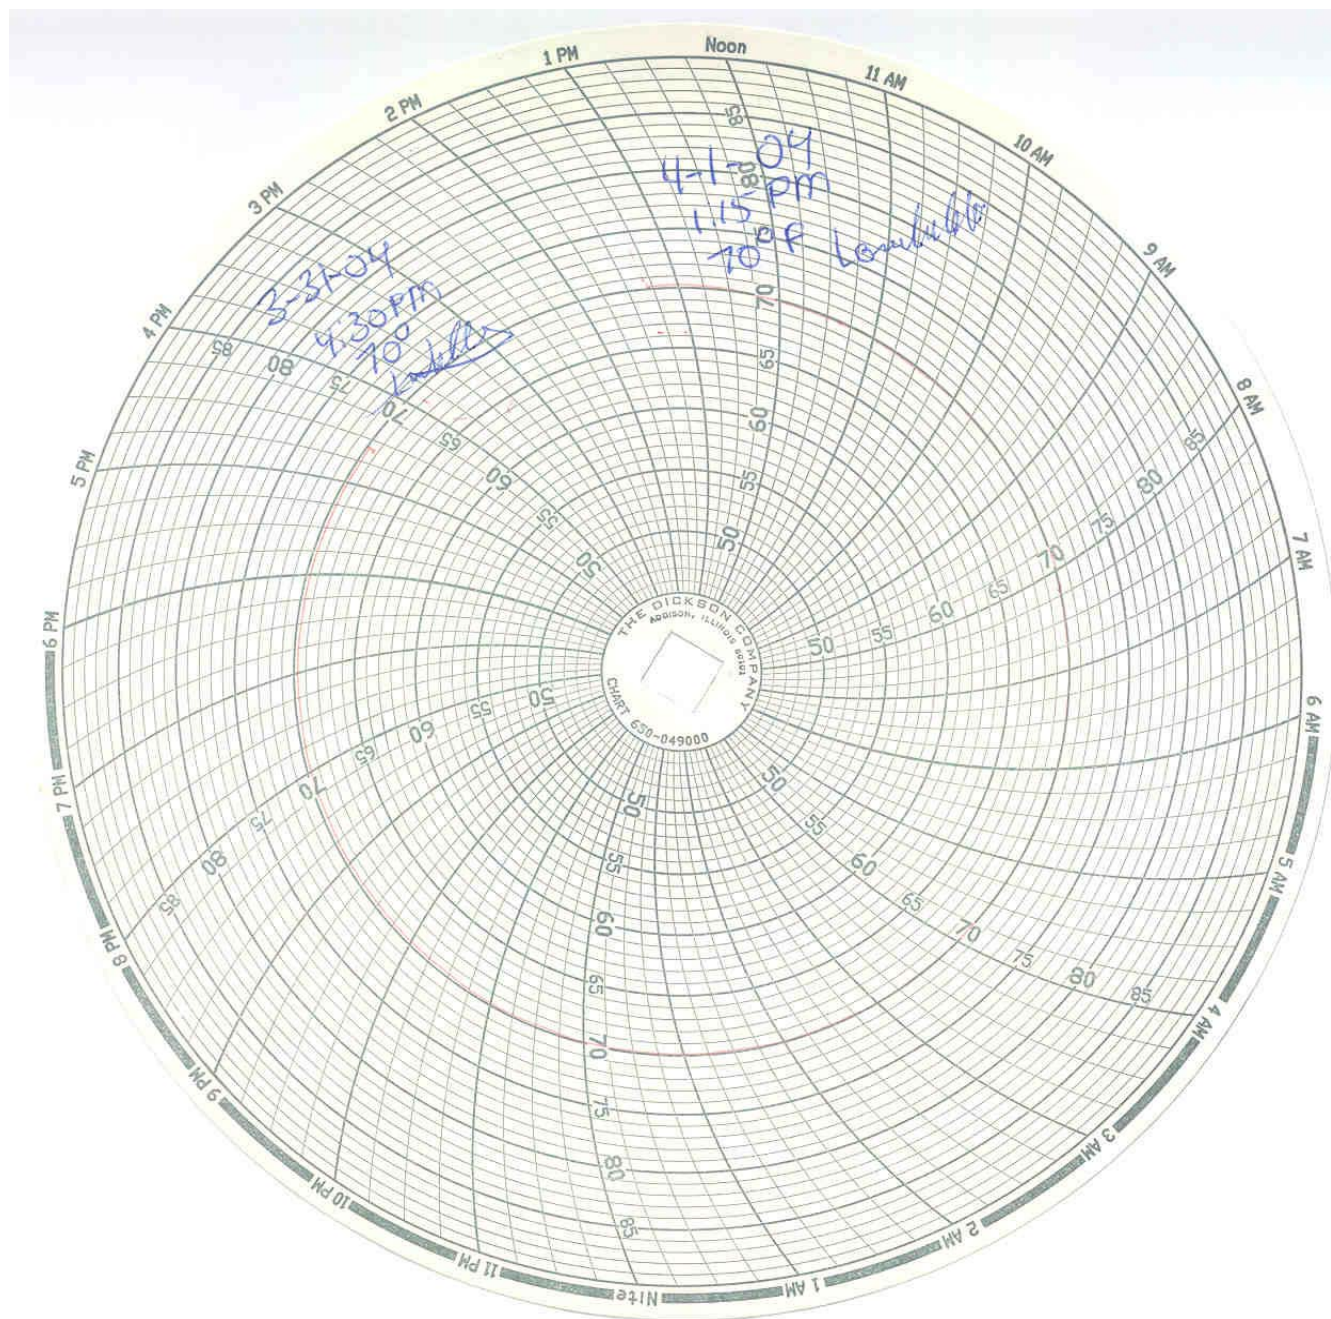

Temperature Plot

APPENDIX D
LOW RISK PHOTOGRAPHS

TABLE OF PHOTOGRAPHS

	<u>Page No.</u>
Photo No. 1. Post-Test 5 th Fem. P1 Driver Dummy Left Side View	D-1
Photo No. 2. Pre-Test 5 th Fem. P1 Driver Dummy Left Side View (Door Open)	D-2
Photo No. 3. Post-Test 5 th Fem. P1 Driver Dummy Left Side View (Door Open)	D-3
Photo No. 4. Pre-Test 5 th Fem. P1 Driver Dummy Right Side View (Door Open)	D-4
Photo No. 5. Post-Test 5 th Fem. P1 Driver Dummy Right Side View (Door Open)	D-5
Photo No. 6. Pre-Test 5 th Fem. P1 Driver Dummy Left Side Head Position View	D-6
Photo No. 7. Pre-Test 5 th Fem. P1 Driver Dummy Right Side Head Position View	D-7
Photo No. 8. Pre-Test 5 th Fem. P1 Driver Dummy Left Side Mid Position View	D-8
Photo No. 9. Pre-Test 5 th Fem. P1 Driver Dummy Right Side Mid Position View	D-9
Photo No. 10. Post-Test 5 th Fem. P1 Driver Dummy Left Side Head Contact View	D-10
Photo No. 11. Post-Test 5 th Fem. P1 Driver Dummy Right Side Head Contact View	D-11
Photo No. 12. Post-Test 5 th Fem. P1 Driver Dummy Airbag Left View	D-12
Photo No. 13. Post-Test 5 th Fem. P1 Driver Dummy Airbag Right View	D-13
Photo No. 14. Pre-Test 5 th Fem. P2 Driver Dummy Left Side View	D-14
Photo No. 15. Post-Test 5 th Fem. P2 Driver Dummy Left Side View	D-15
Photo No. 16. Pre-Test 5 th Fem. P2 Driver Dummy Right Side View	D-16
Photo No. 17. Post-Test 5 th Fem. P2 Driver Dummy Right Side View	D-17
Photo No. 18. Pre-Test 5 th Fem. P2 Driver Dummy Left Side View (Door Open)	D-18
Photo No. 19. Post-Test 5 th Fem. P2 Driver Dummy Left Side View (Door Open)	D-19
Photo No. 20. Pre-Test 5 th Fem. P2 Driver Dummy Right Side View (Door Open)	D-20
Photo No. 21. Post-Test 5 th Fem. P2 Driver Dummy Right Side View (Door Open)	D-21
Photo No. 22. Pre-Test 5 th Fem. P2 Driver Dummy Left Side Head Position View	D-22
Photo No. 23. Pre-Test 5 th Fem. P2 Driver Dummy Right Side Head Position View	D-23
Photo No. 24. Pre-Test 5 th Fem. P2 Driver Dummy Left Side Mid Position View	D-24
Photo No. 25. Pre-Test 5 th Fem. P2 Driver Dummy Right Side Mid Position View	D-25
Photo No. 26. Post-Test 5 th Fem. P2 Driver Dummy Head Contact Left Side View	D-26
Photo No. 27. Post-Test 5 th Fem. P2 Driver Dummy Knee Contact Left Side View	D-27

	<u>Page No.</u>
Photo No. 28. Post-Test 5 th Fem. P2 Driver Dummy Knee Contact Right Side View	D-28
Photo No. 29. Post-Test 5 th Fem. P2 Driver Dummy Airbag Position Right Side View	D-29
Photo No. 30. Post-Test 5 th Fem. P2 Driver Dummy Airbag Contact View	D-30
Photo No. 31. Post-Test 3YO P1 Passenger Dummy Left Side View	D-31
Photo No. 32. Pre-Test 3YO P1 Passenger Dummy Right Side View	D-32
Photo No. 33. Post-Test 3YO P1 Passenger Dummy Right Side View	D-33
Photo No. 34. Pre-Test 3YO P1 Passenger Dummy Left Side View (Door Open)	D-34
Photo No. 35. Post-Test 3YO P1 Passenger Dummy Left Side View (Door Open)	D-35
Photo No. 36. Pre-Test 3YO P1 Passenger Dummy Right Side View (Door Open)	D-36
Photo No. 37. Post-Test 3YO P1 Passenger Dummy Right $\frac{3}{4}$ Upper View	D-37
Photo No. 38. Pre-Test 3YO P1 Passenger Dummy Left Side Head Position View	D-38
Photo No. 39. Pre-Test 3YO P1 Passenger Dummy Right Side Head Position View	D-39
Photo No. 40. Pre-Test 3YO P1 Passenger Dummy Right Side Mid Position View	D-40
Photo No. 41. Pre-Test 3YO P1 Passenger Dummy Right Side Feet Position View	D-41
Photo No. 42. Post-Test 3YO P1 Passenger Dummy Head Contact View (B-pillar)	D-42
Photo No. 43. Post-Test 3YO P1 Passenger Dummy Knee Contact View (Visor)	D-43
Photo No. 44. Post-Test 3YO P1 Passenger Dummy Knee Contact View	D-44
Photo No. 45. Post-Test 3YO P1 Passenger Dummy Airbag Contact View	D-45
Photo No. 46. Pre-Test 3YO P2 Passenger Dummy Left Side View	D-46
Photo No. 47. Pre-Test 3YO P2 Passenger Dummy Right Side View	D-47
Photo No. 48. Post-Test 3YO P2 Passenger Dummy Right Side View	D-48
Photo No. 49. Pre-Test 3YO P2 Passenger Dummy Left Side View (Door Open)	D-49
Photo No. 50. Post-Test 3YO P2 Passenger Dummy Left Side View (Door Open)	D-50
Photo No. 51. Pre-Test 3YO P2 Passenger Dummy Right Side View (Door Open)	D-51
Photo No. 52. Post-Test 3YO P2 Passenger Dummy Right Side View (Door Open)	D-52
Photo No. 53. Pre-Test 3YO P2 Passenger Dummy Left Side Head Position View	D-53
Photo No. 54. Pre-Test 3YO P2 Passenger Dummy Right Side Head Position View	D-54
Photo No. 55. Pre-Test 3YO P2 Passenger Dummy Left Knee Position View	D-55
Photo No. 56. Pre-Test 3YO P2 Passenger Dummy Right Knee Position View	D-56

	<u>Page No.</u>
Photo No. 57. Post-Test 3YO P2 Passenger Dummy Head Contact Left Side View	D-57
Photo No. 58. Post-Test 3YO P2 Passenger Dummy Head Contact Right Side View	D-58
Photo No. 59. Post-Test 3YO P2 Passenger Dummy Left Knee Contact View	D-59
Photo No. 60. Post-Test 3YO P2 Passenger Dummy Right Knee Contact View	D-60
Photo No. 61. Post-Test 3YO P2 Passenger Dummy Airbag Contact Left Side View	D-61
Photo No. 62. Post-Test 3YO P2 Passenger Dummy Airbag Contact Right Side View	D-62
Photo No. 63. Pre-Test 6YO P1 Passenger Dummy Left Side View	D-63
Photo No. 64. Post Test 6YO P1 Passenger Dummy Left Side View	D-64
Photo No. 65. Pre-Test 6YO P1 Passenger Dummy Right Side View	D-65
Photo No. 66. Post-Test 6YO P1 Passenger Dummy Right Side View	D-66
Photo No. 67. Pre-Test 6YO P1 Passenger Dummy Left Side View (Door Open)	D-67
Photo No. 68. Post-Test 6YO P1 Passenger Dummy Left Side View (Door Open)	D-68
Photo No. 69. Pre-Test 6YO P1 Passenger Dummy Right Side View (Door Open)	D-69
Photo No. 70. Post-Test 6YO P1 Passenger Dummy Right Side View (Door Open)	D-70
Photo No. 71. Pre-Test 6YO P1 Passenger Dummy Head Frontal Position View	D-71
Photo No. 72. Pre-Test 6YO P1 Passenger Dummy Head Position Left Side View	D-72
Photo No. 73. Pre-Test 6YO P1 Passenger Dummy Head Position Right Side View	D-73
Photo No. 74. Pre-Test 6YO P1 Passenger Dummy Mid Position Left Side View	D-74
Photo No. 75. Pre-Test 6YO P1 Passenger Dummy Mid Position Right Side View	D-75
Photo No. 76. Post-Test 6YO P1 Passenger Dummy Head Contact View (center console)	D-76
Photo No. 77. Post-Test 6YO P1 Passenger Dummy Head Contact View (visor & header)	D-77
Photo No. 78. Post-Test 6YO P1 Passenger Dummy Airbag View Through Windshield	D-78
Photo No. 79. Post-Test 6YO P1 Passenger Dummy Airbag Contact View	D-79
Photo No. 80. Pre-Test 6YO P2 Passenger Dummy Left Side View	D-80
Photo No. 81. Post Test 6YO P2 Passenger Dummy Left Side View	D-81
Photo No. 82. Pre-Test 6YO P2 Passenger Dummy Right Side View	D-82
Photo No. 83. Post-Test 6YO P2 Passenger Dummy Right Side View	D-83
Photo No. 84. Pre-Test 6YO P2 Passenger Dummy Left Side View (Door Open)	D-84
Photo No. 85. Post-Test 6YO P2 Passenger Dummy Left Side View (Door Open)	D-85

		<u>Page No.</u>
Photo No. 86.	Pre-Test 6YO P2 Passenger Dummy Right Side View (Door Open)	D-86
Photo No. 87.	Post-Test 6YO P2 Passenger Dummy Right Side View (Door Open)	D-87
Photo No. 88.	Pre-Test 6YO P2 Passenger Dummy Head Frontal Position View	D-88
Photo No. 89.	Post-Test 6YO P2 Passenger Dummy Head Frontal Position View	D-89
Photo No. 90.	Post-Test 6YO P2 Passenger Dummy Head Contact View	D-90
Photo No. 91.	Post-Test 6YO P2 Passenger Dummy Knee Contact View	D-91
Photo No. 92.	Post-Test 6YO P2 Passenger Dummy Airbag Contact Left Side View	D-92
Photo No. 93.	Post-Test 6YO P2 Passenger Dummy Airbag Contact Right Side View	D-93
Photo No. 94.	Driver Geometric Center (2004 Dodge Durango)	D-94
Photo No. 95.	Passenger Geometric Center (2004 Dodge Durango)	D-95



Post-Test 5th Fem. P1 Driver Dummy Left Side View



Pre-Test 5th Fem. P1 Driver Dummy Left Side View (Door Open)



Post-Test 5th Fem. P1 Driver Dummy Left Side View (Door Open)



Pre-Test 5th Fem. P1 Driver Dummy Right Side View (Door Open)



Post-Test 5th Fem. P1 Driver Dummy Right Side View (Door Open)



Pre-Test 5th Fem. P1 Driver Dummy Left Side Head Position View



Pre-Test 5th Fem. P1 Driver Dummy Right Side Head Position View



Pre-Test 5th Fem. P1 Driver Dummy Left Side Mid Position View



Pre-Test 5th Fem. P1 Driver Dummy Right Side Mid Position View



Post-Test 5th Fem. P1 Driver Dummy Left Side Head Contact View



Post-Test 5th Fem. P1 Driver Dummy Right Side Head Contact View



Post-Test 5th Fem. P1 Driver Dummy Airbag Left View




Post-Test 5th Fem. P1 Driver Dummy Airbag Right View



Pre-Test 5th Fem. P2 Driver Dummy Left Side View



Post-Test 5th Fem. P2 Driver Dummy Left Side View

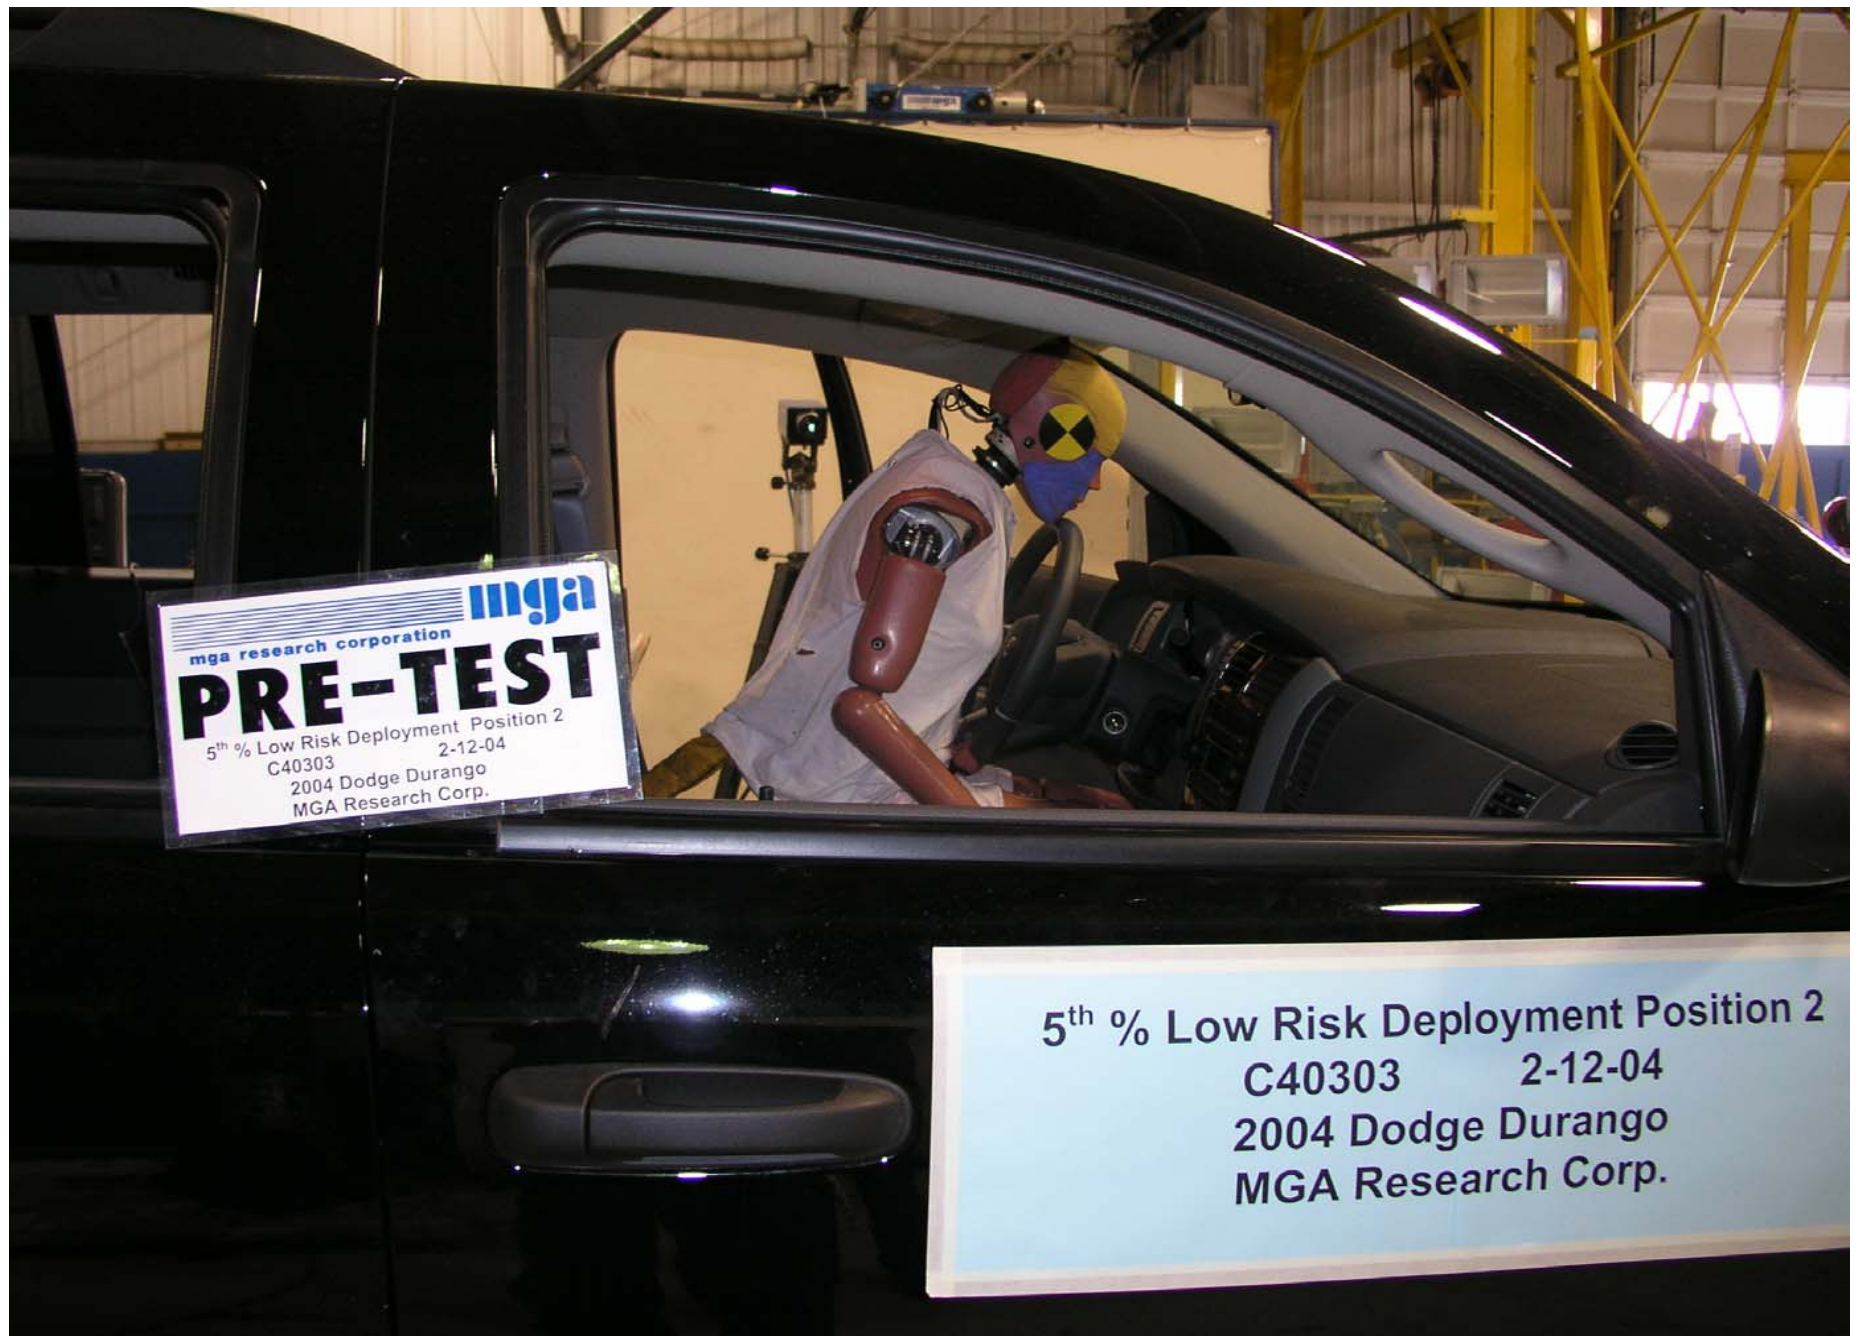

Pre-Test 5th Fem. P2 Driver Dummy Right Side View



Post-Test 5th Fem. P2 Driver Dummy Right Side View



Pre-Test 5th Fem. P2 Driver Dummy Left Side View (Door Open)



Post-Test 5th Fem. P2 Driver Dummy Left Side View (Door Open)



Pre-Test 5th Fem. P2 Driver Dummy Right Side View (Door Open)




Post-Test 5th Fem. P2 Driver Dummy Right Side View (Door Open)



Pre-Test 5th Fem. P2 Driver Dummy Left Side Head Position View



Pre-Test 5th Fem. P2 Driver Dummy Right Side Head Position View

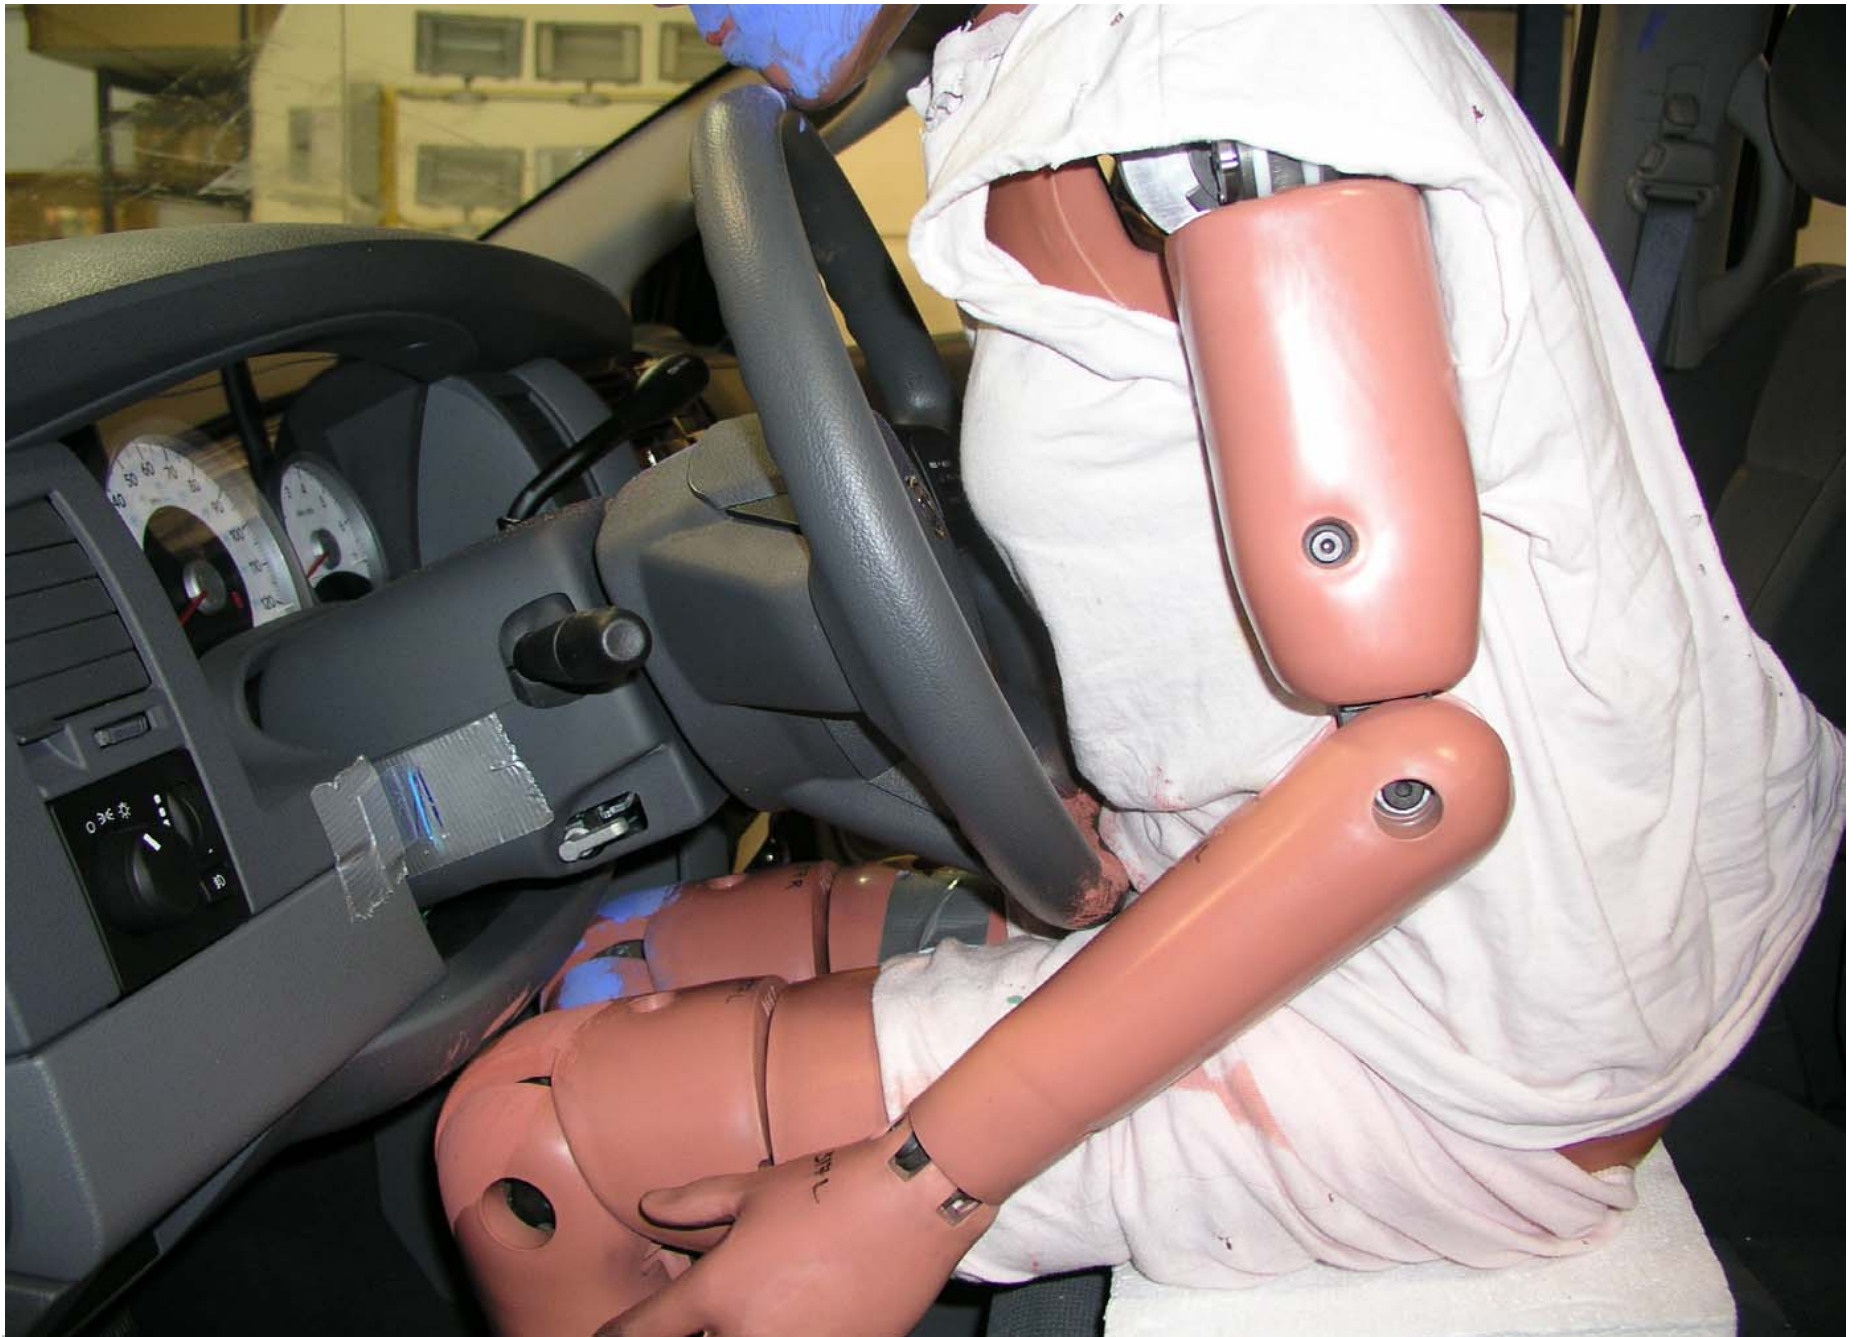

Pre-Test 5th Fem. P2 Driver Dummy Left Side Mid Position View



Pre-Test 5th Fem. P2 Driver Dummy Right Side Mid Position View



Post-Test 5th Fem. P2 Driver Dummy Head Contact Left Side View



Post-Test 5th Fem. P2 Driver Dummy Knee Contact Left Side View



Post-Test 5th Fem. P2 Driver Dummy Knee Contact Right Side View



Post-Test 5th Fem. P2 Driver Dummy Airbag Position Right Side View



Post-Test 5th Fem. P2 Driver Dummy Airbag Contact View



Post-Test 3YO P1 Passenger Dummy Left Side View



Pre-Test 3YO P1 Passenger Dummy Right Side View



mga research corporation
POST-TEST
3YO Low Risk Deployment Position 1
C40303 1-29-04
2004 Dodge Durango
MGA Research Corp.

C40303
3 YO Low Risk Deployment
Position 1 1-29-04
MGA Research Corp.
2004 Dodge Durango

Post-Test 3YO P1 Passenger Dummy Right Side View



Pre-Test 3YO P1 Passenger Dummy Left Side View (Door Open)



Post-Test 3YO P1 Passenger Dummy Left Side View (Door Open)



Pre-Test 3YO P1 Passenger Dummy Right Side View (Door Open)



Post-Test 3YO P1 Passenger Dummy Right $\frac{3}{4}$ Upper View



Pre-Test 3YO P1 Passenger Dummy Left Side Head Position View



Pre-Test 3YO P1 Passenger Dummy Right Side Head Position View




Pre-Test 3YO P1 Passenger Dummy Right Side Mid Position View



Pre-Test 3YO P1 Passenger Dummy Right Side Feet Position View



Post-Test 3YO P1 Passenger Dummy Head Contact View (B-pillar)

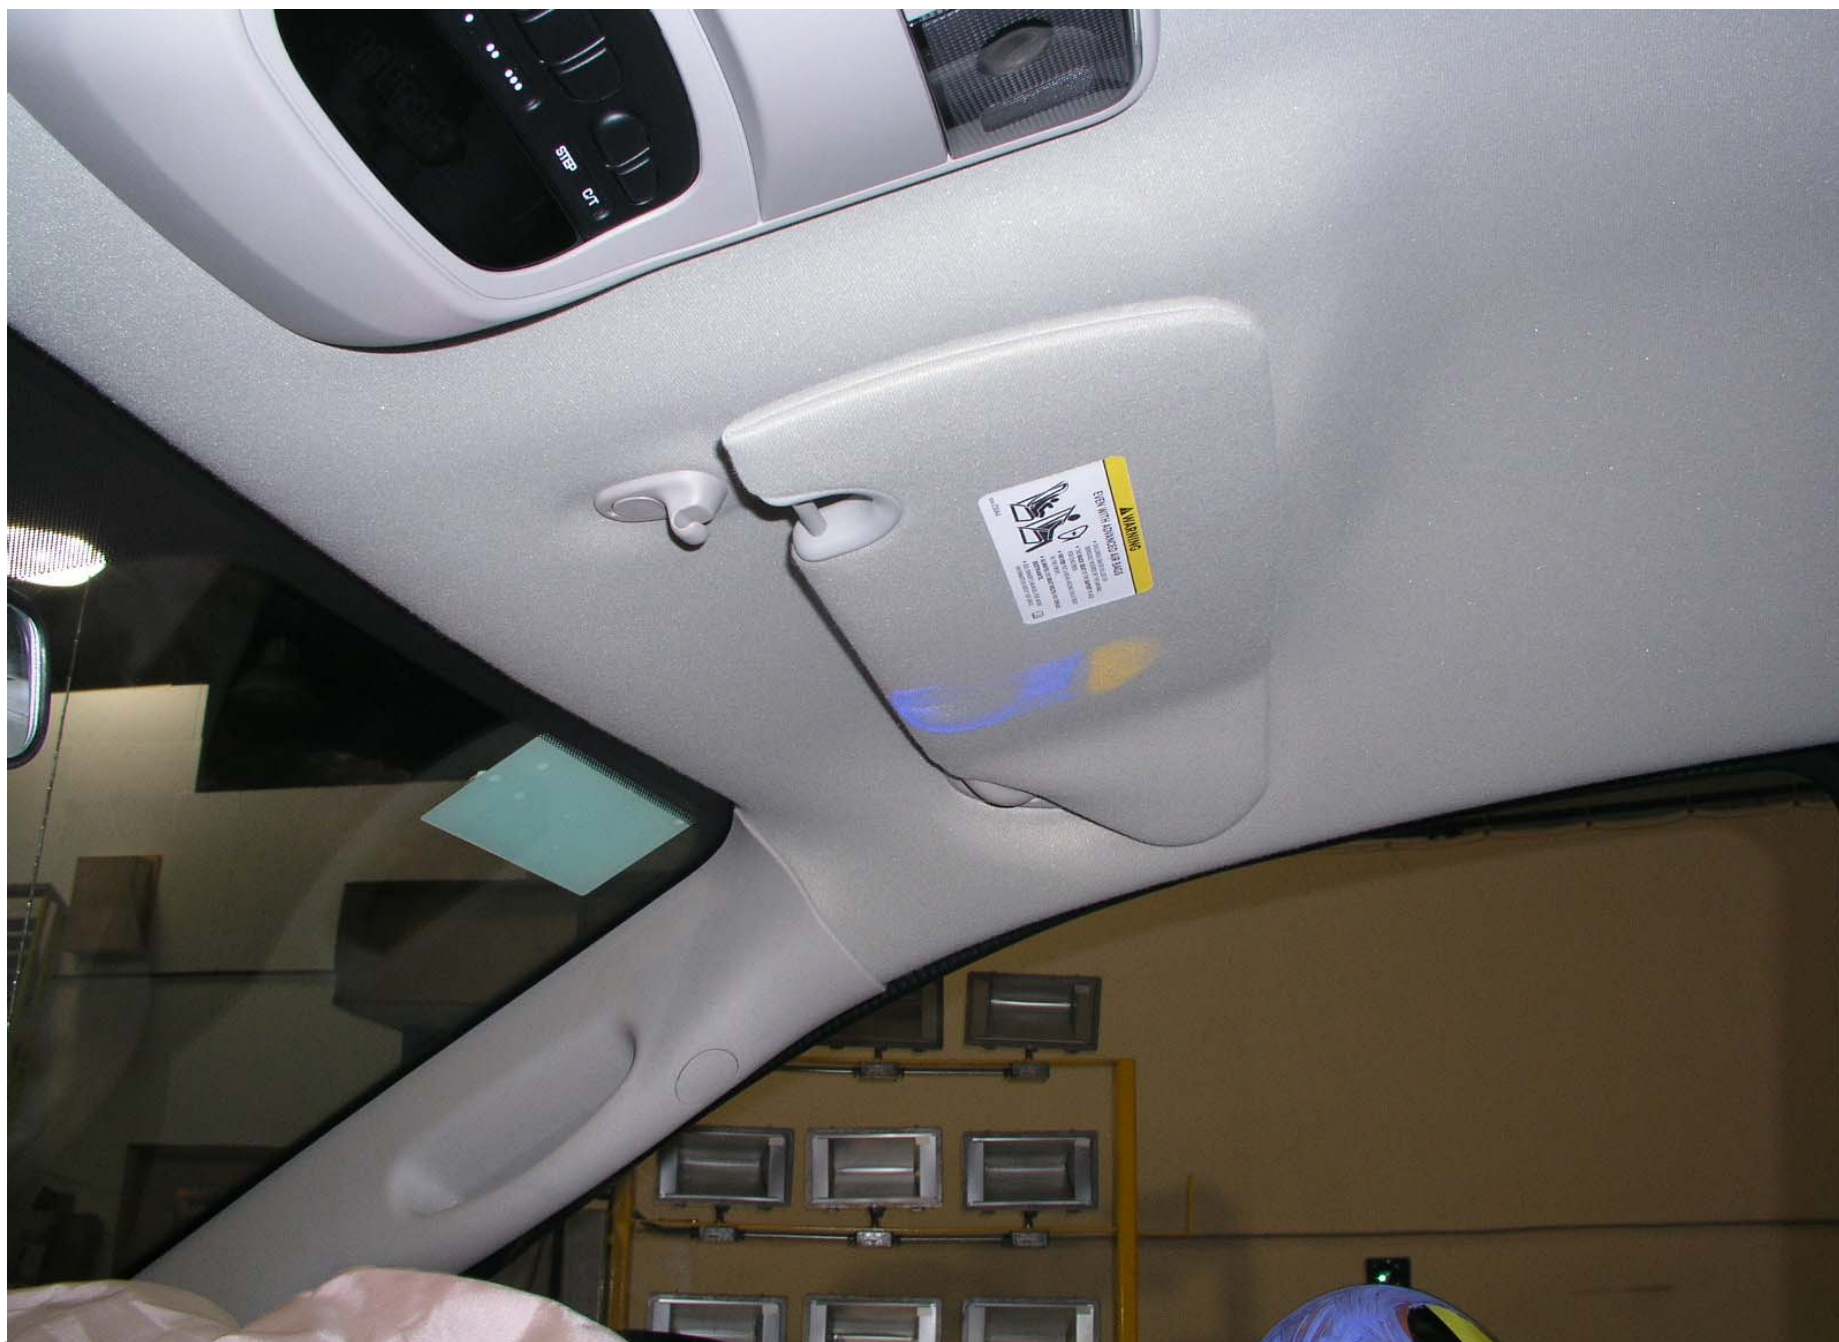

Post-Test 3YO P1 Passenger Dummy Knee Contact View (Visor)



Post-Test 3YO P1 Passenger Dummy Knee Contact View



Post-Test 3YO P1 Passenger Dummy Airbag Contact View



Pre-Test 3YO P2 Passenger Dummy Left Side View



Pre-Test 3YO P2 Passenger Dummy Right Side View



Post-Test 3YO P2 Passenger Dummy Right Side View



Pre-Test 3YO P2 Passenger Dummy Left Side View (Door Open)



Post-Test 3YO P2 Passenger Dummy Left Side View (Door Open)



Pre-Test 3YO P2 Passenger Dummy Right Side View (Door Open)




Post-Test 3YO P2 Passenger Dummy Right Side View (Door Open)



Pre-Test 3YO P2 Passenger Dummy Left Side Head Position View



Pre-Test 3YO P2 Passenger Dummy Right Side Head Position View

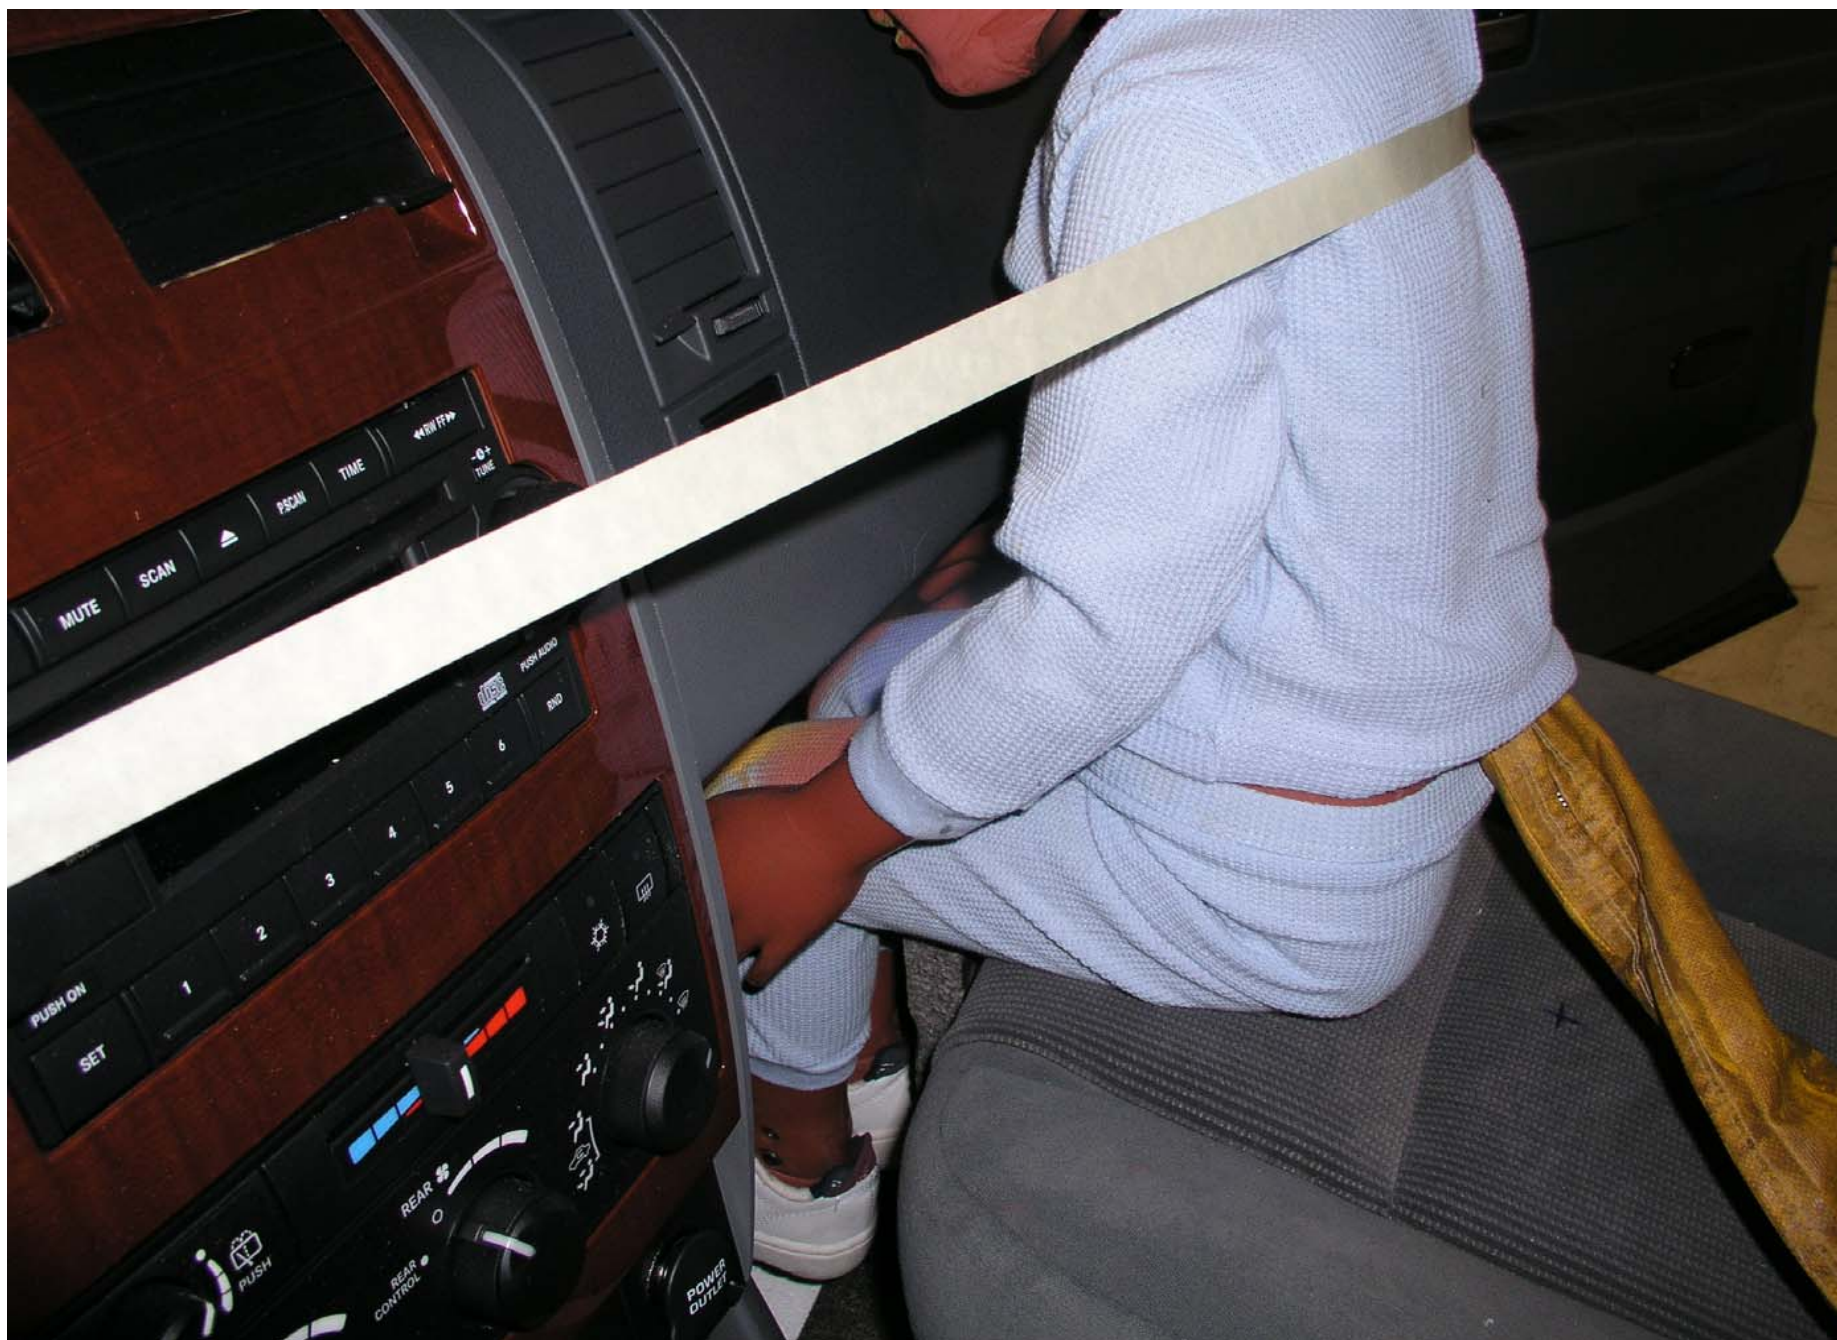

Pre-Test 3YO P2 Passenger Dummy Left Knee Position View



Pre-Test 3YO P2 Passenger Dummy Right Knee Position View




Post-Test 3YO P2 Passenger Dummy Head Contact Left Side View



Post-Test 3YO P2 Passenger Dummy Head Contact Right Side View



Post-Test 3YO P2 Passenger Dummy Left Knee Contact View

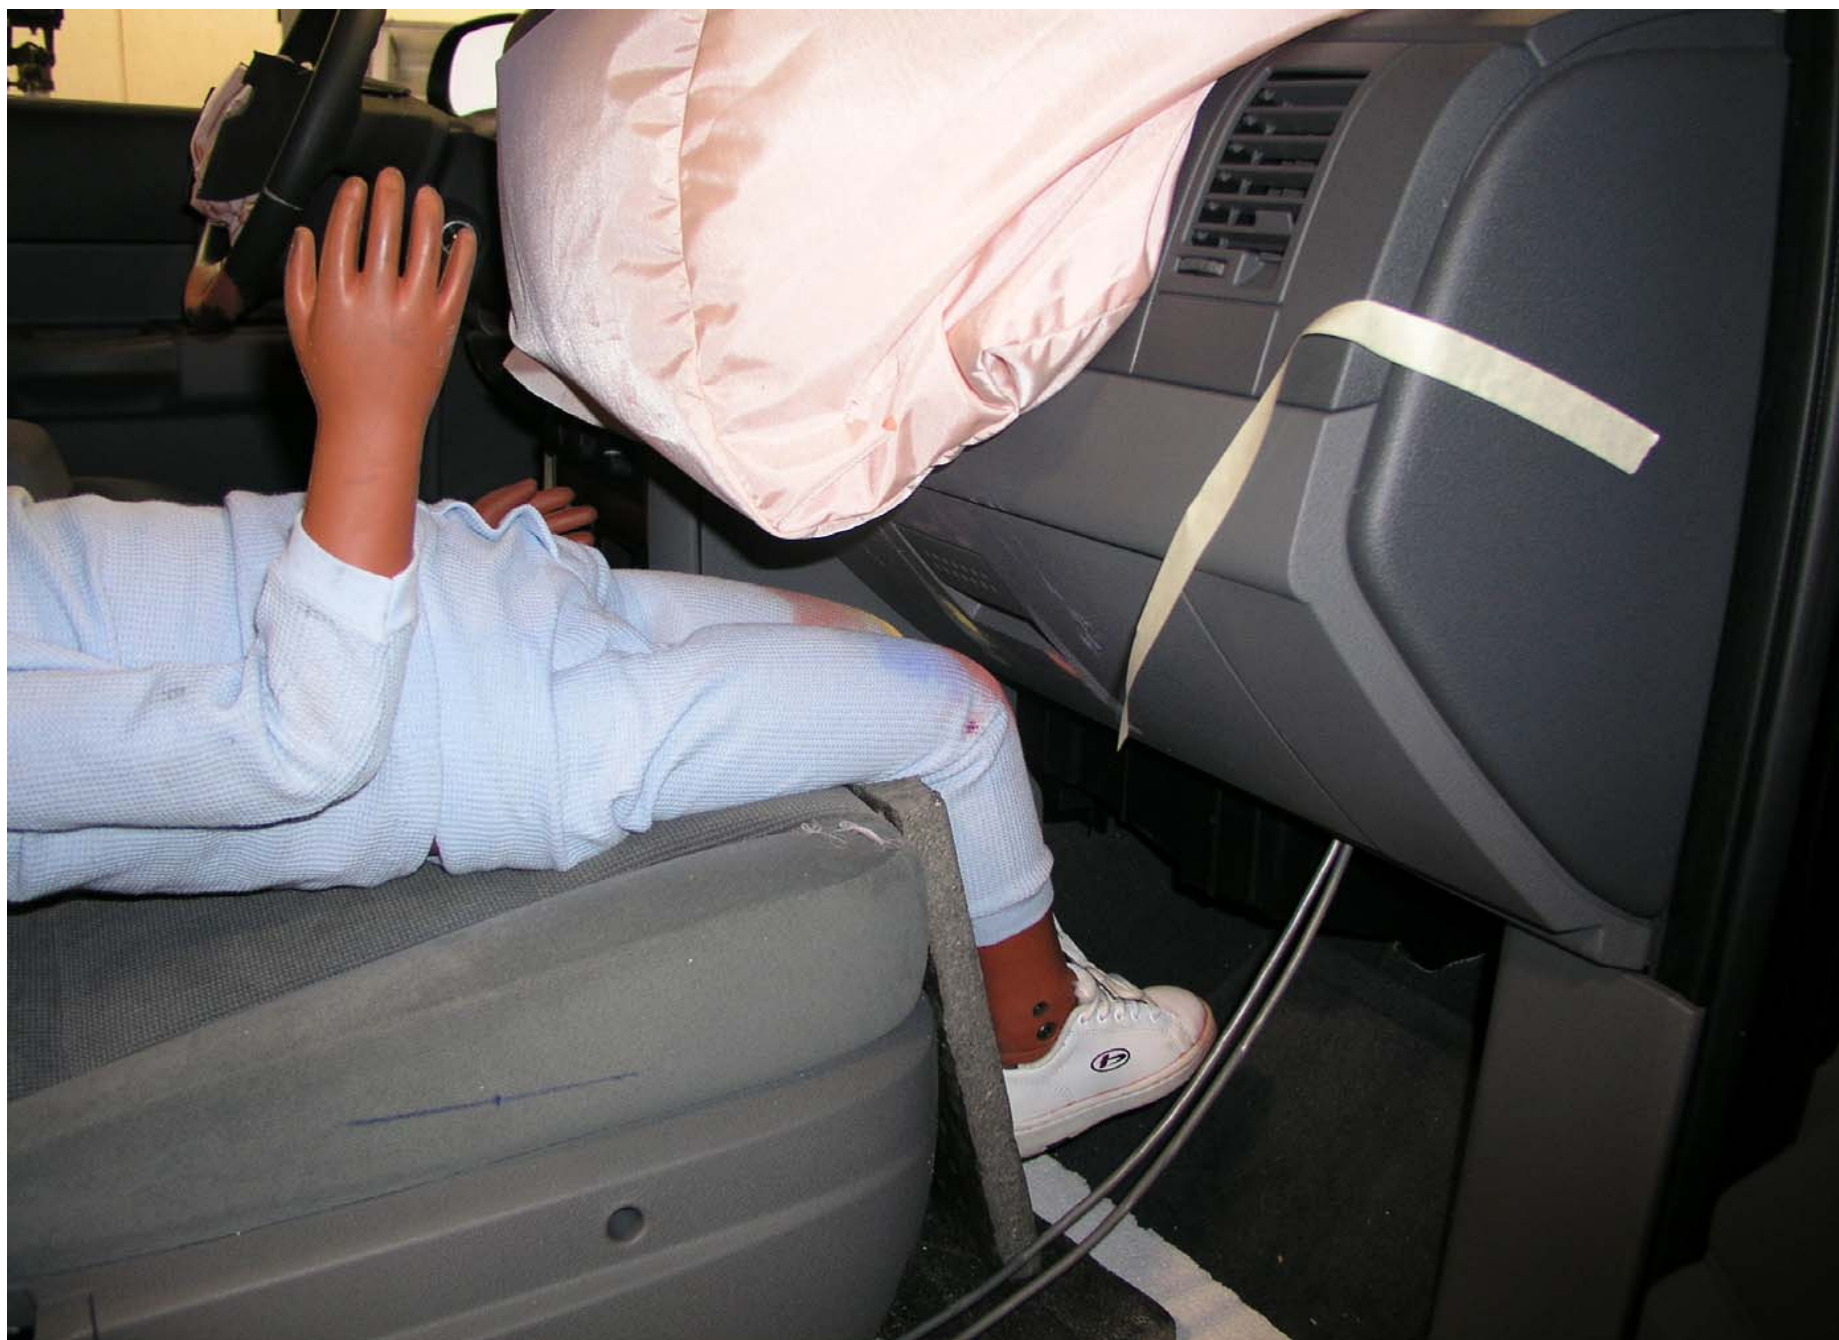

Post-Test 3YO P2 Passenger Dummy Right Knee Contact View



Post-Test 3YO P2 Passenger Dummy Airbag Contact Left Side View



Post-Test 3YO P2 Passenger Dummy Airbag Contact Right Side View




Pre-Test 6YO P1 Passenger Dummy Left Side View



Post Test 6YO P1 Passenger Dummy Left Side View



Pre-Test 6YO P1 Passenger Dummy Right Side View

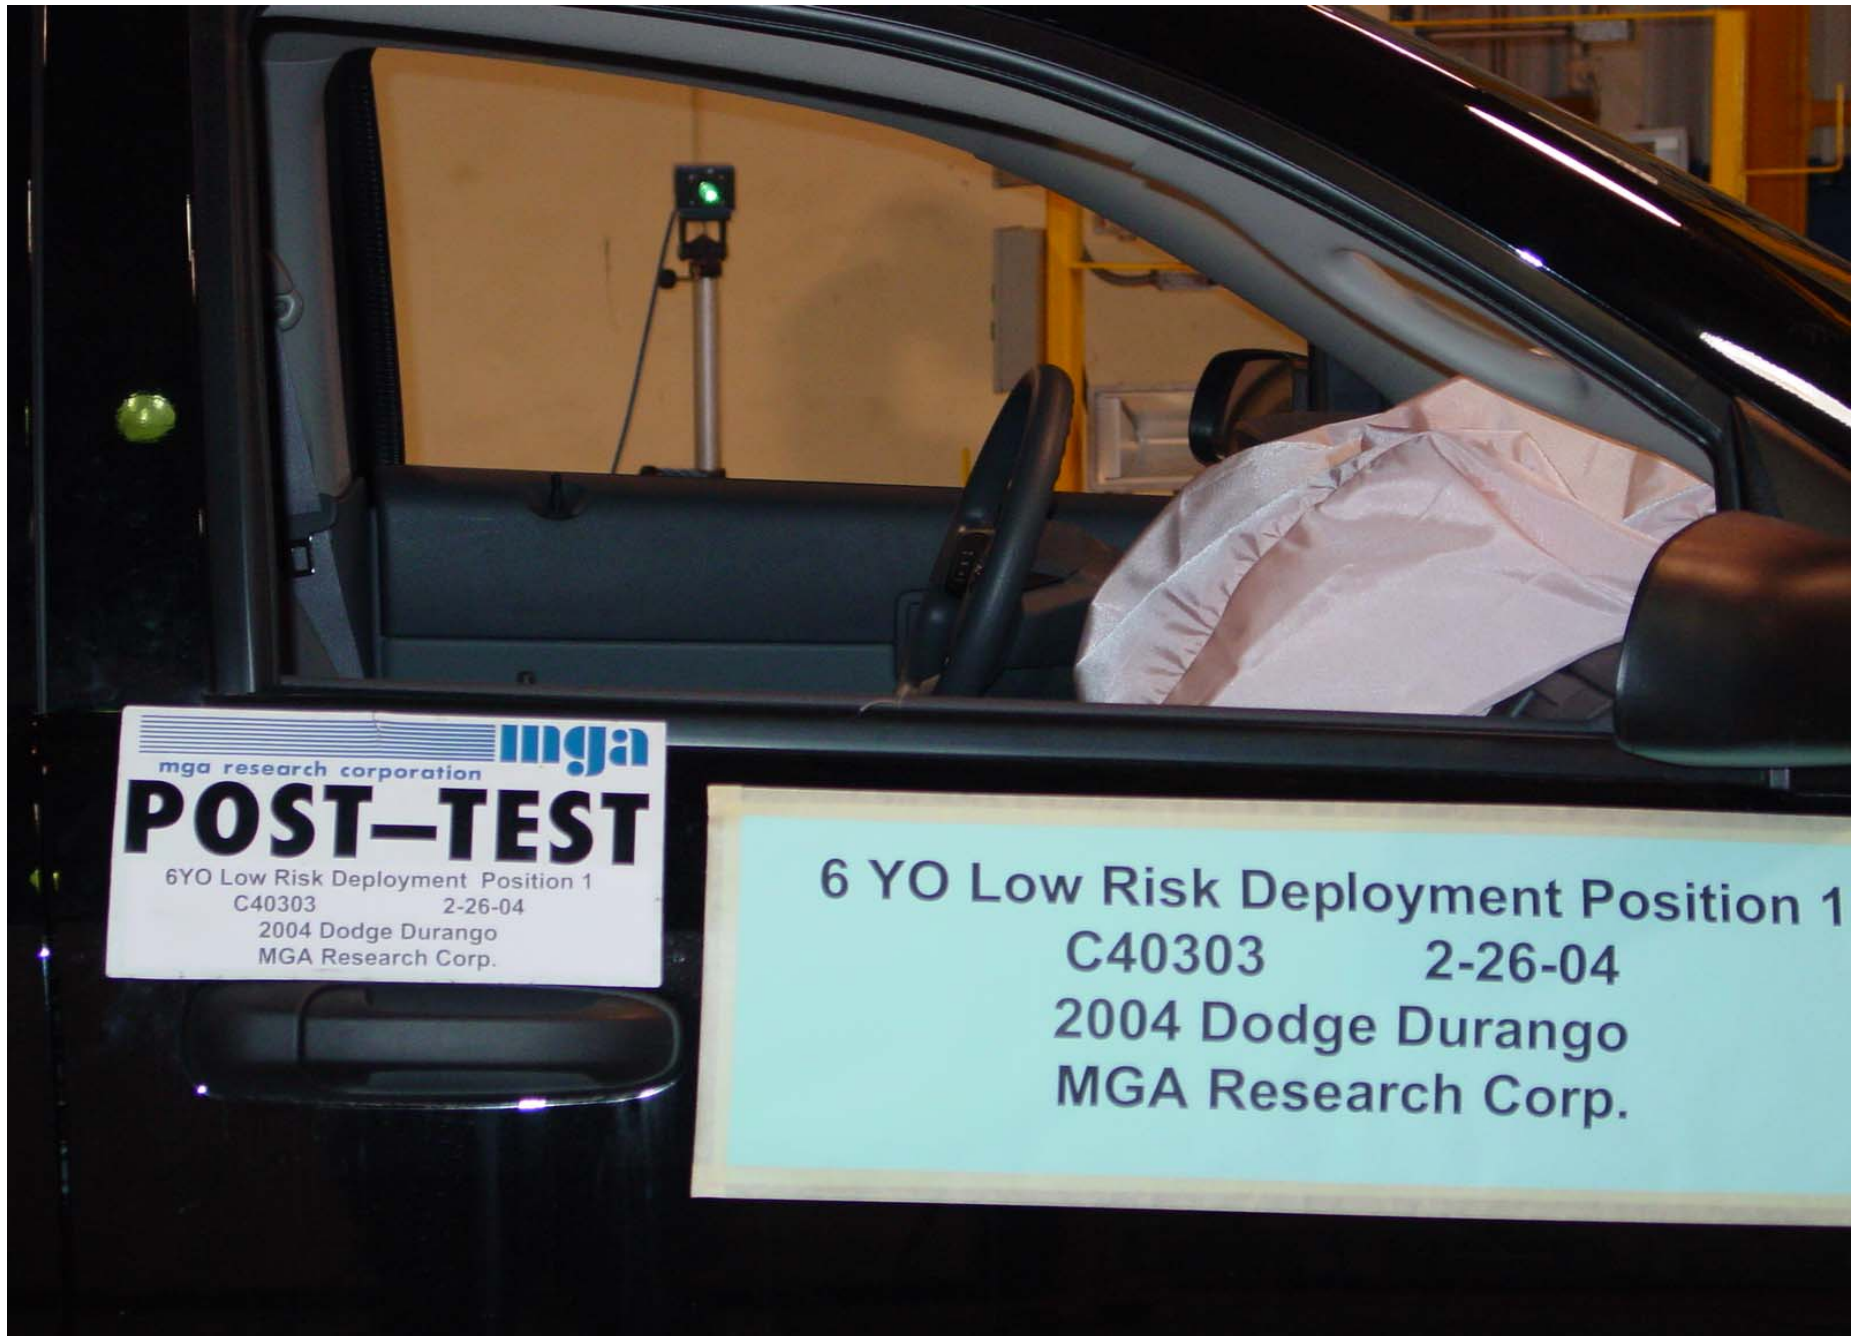

Post-Test 6YO P1 Passenger Dummy Right Side View



Pre-Test 6YO P1 Passenger Dummy Left Side View (Door Open)



Post-Test 6YO P1 Passenger Dummy Left Side View (Door Open)



Pre-Test 6YO P1 Passenger Dummy Right Side View (Door Open)



Post-Test 6YO P1 Passenger Dummy Right Side View (Door Open)

Pre-Test 6YO P1 Passenger Dummy Head Frontal Position View



Pre-Test 6YO P1 Passenger Dummy Head Position Left Side View




Pre-Test 6YO P1 Passenger Dummy Head Position Right Side View



Pre-Test 6YO P1 Passenger Dummy Mid Position Left Side View



Pre-Test 6YO P1 Passenger Dummy Mid Position Right Side View

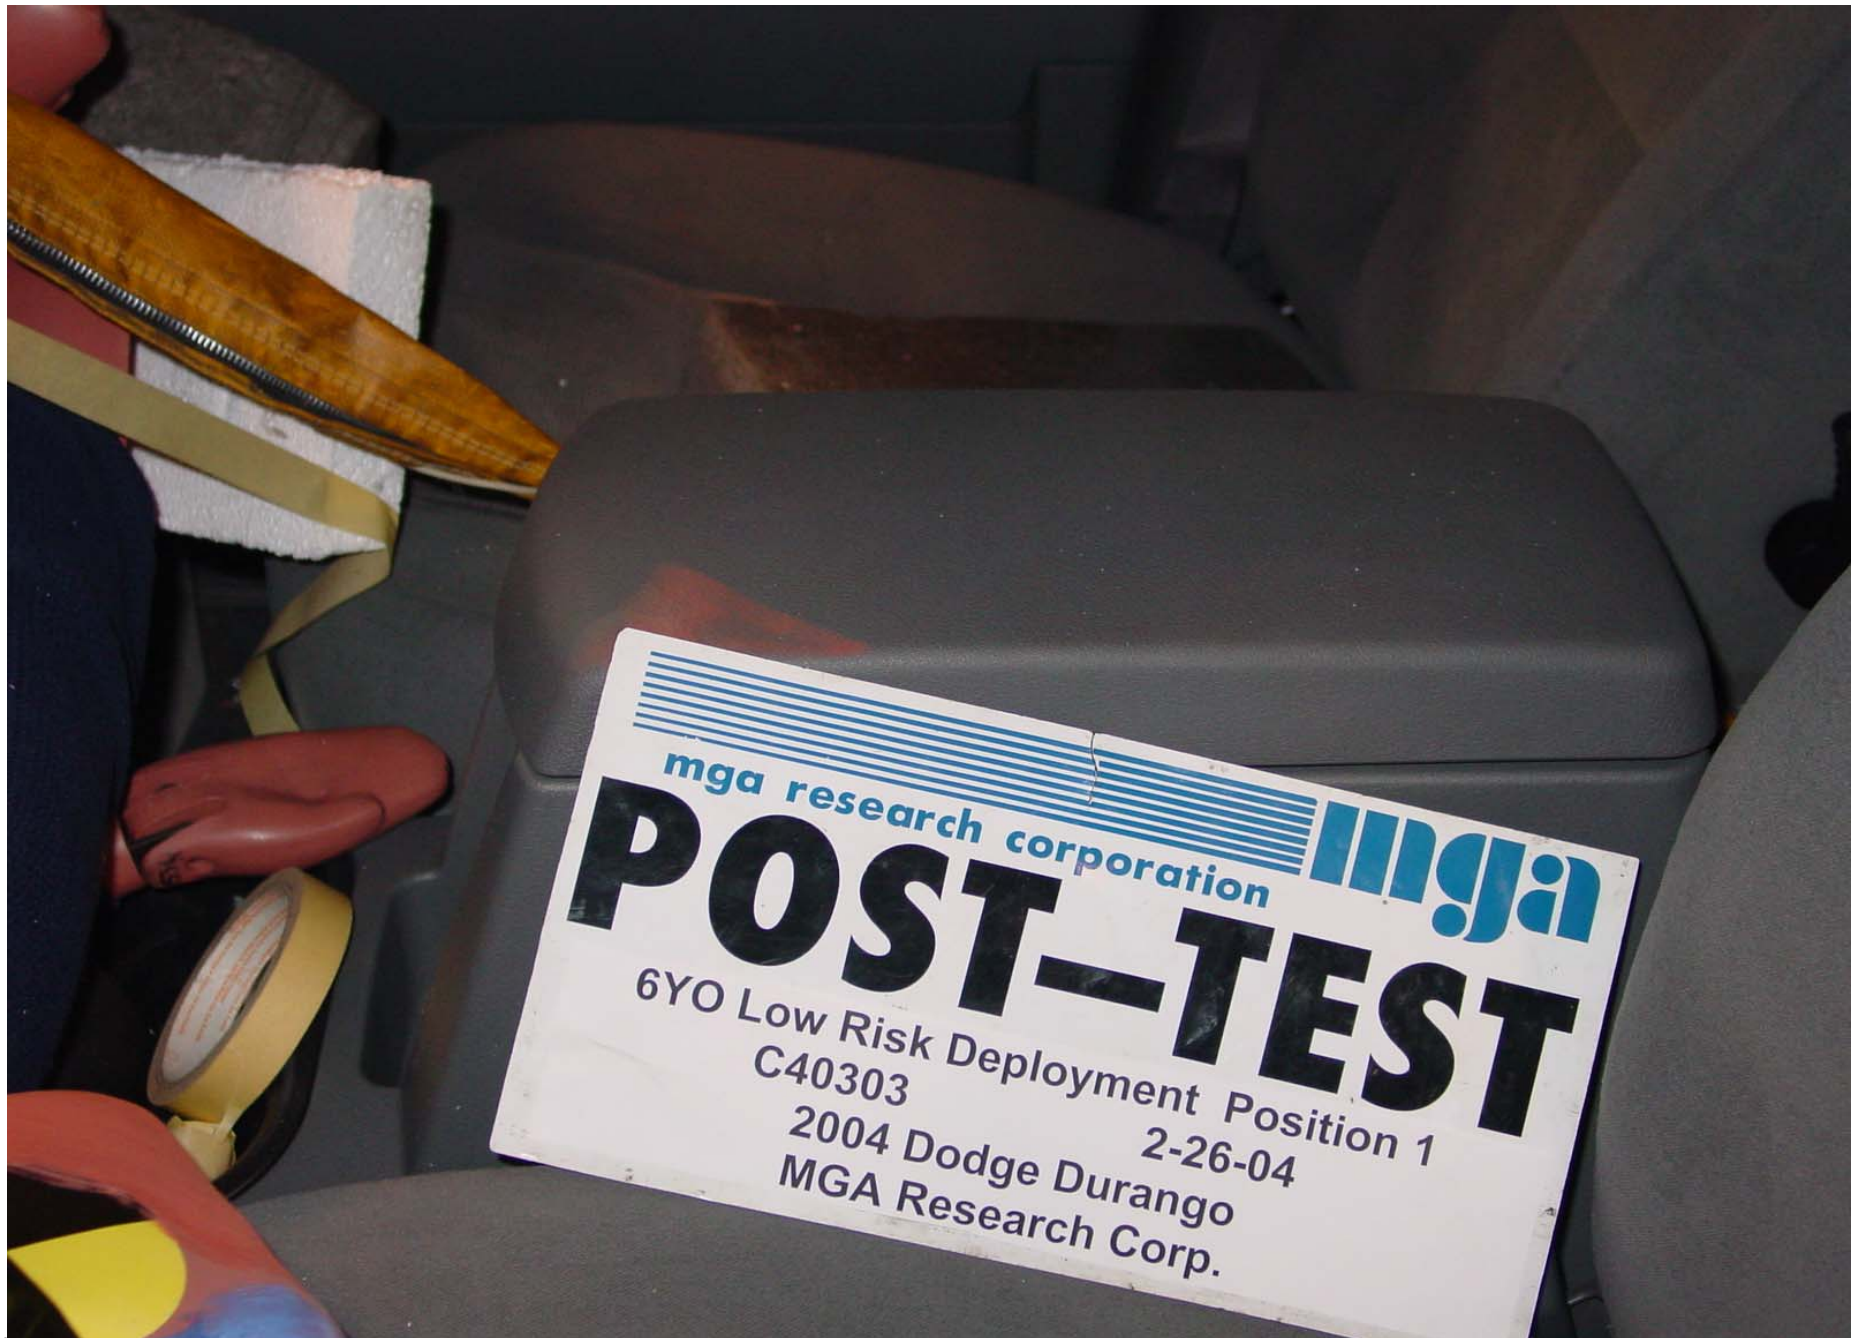

Post-Test 6YO P1 Passenger Dummy Head Contact View (center console)



Post-Test 6YO P1 Passenger Dummy Head Contact View (visor & header)



Post-Test 6YO P1 Passenger Dummy Airbag View Through Windshield



Post-Test 6YO P1 Passenger Dummy Airbag Contact View



Pre-Test 6YO P2 Passenger Dummy Left Side View



Post Test 6YO P2 Passenger Dummy Left Side View



Pre-Test 6YO P2 Passenger Dummy Right Side View



Post-Test 6YO P2 Passenger Dummy Right Side View



Pre-Test 6YO P2 Passenger Dummy Left Side View (Door Open)



Post-Test 6YO P2 Passenger Dummy Left Side View (Door Open)




Pre-Test 6YO P2 Passenger Dummy Right Side View (Door Open)




Post-Test 6YO P2 Passenger Dummy Right Side View (Door Open)



Pre-Test 6YO P2 Passenger Dummy Head Frontal Position View

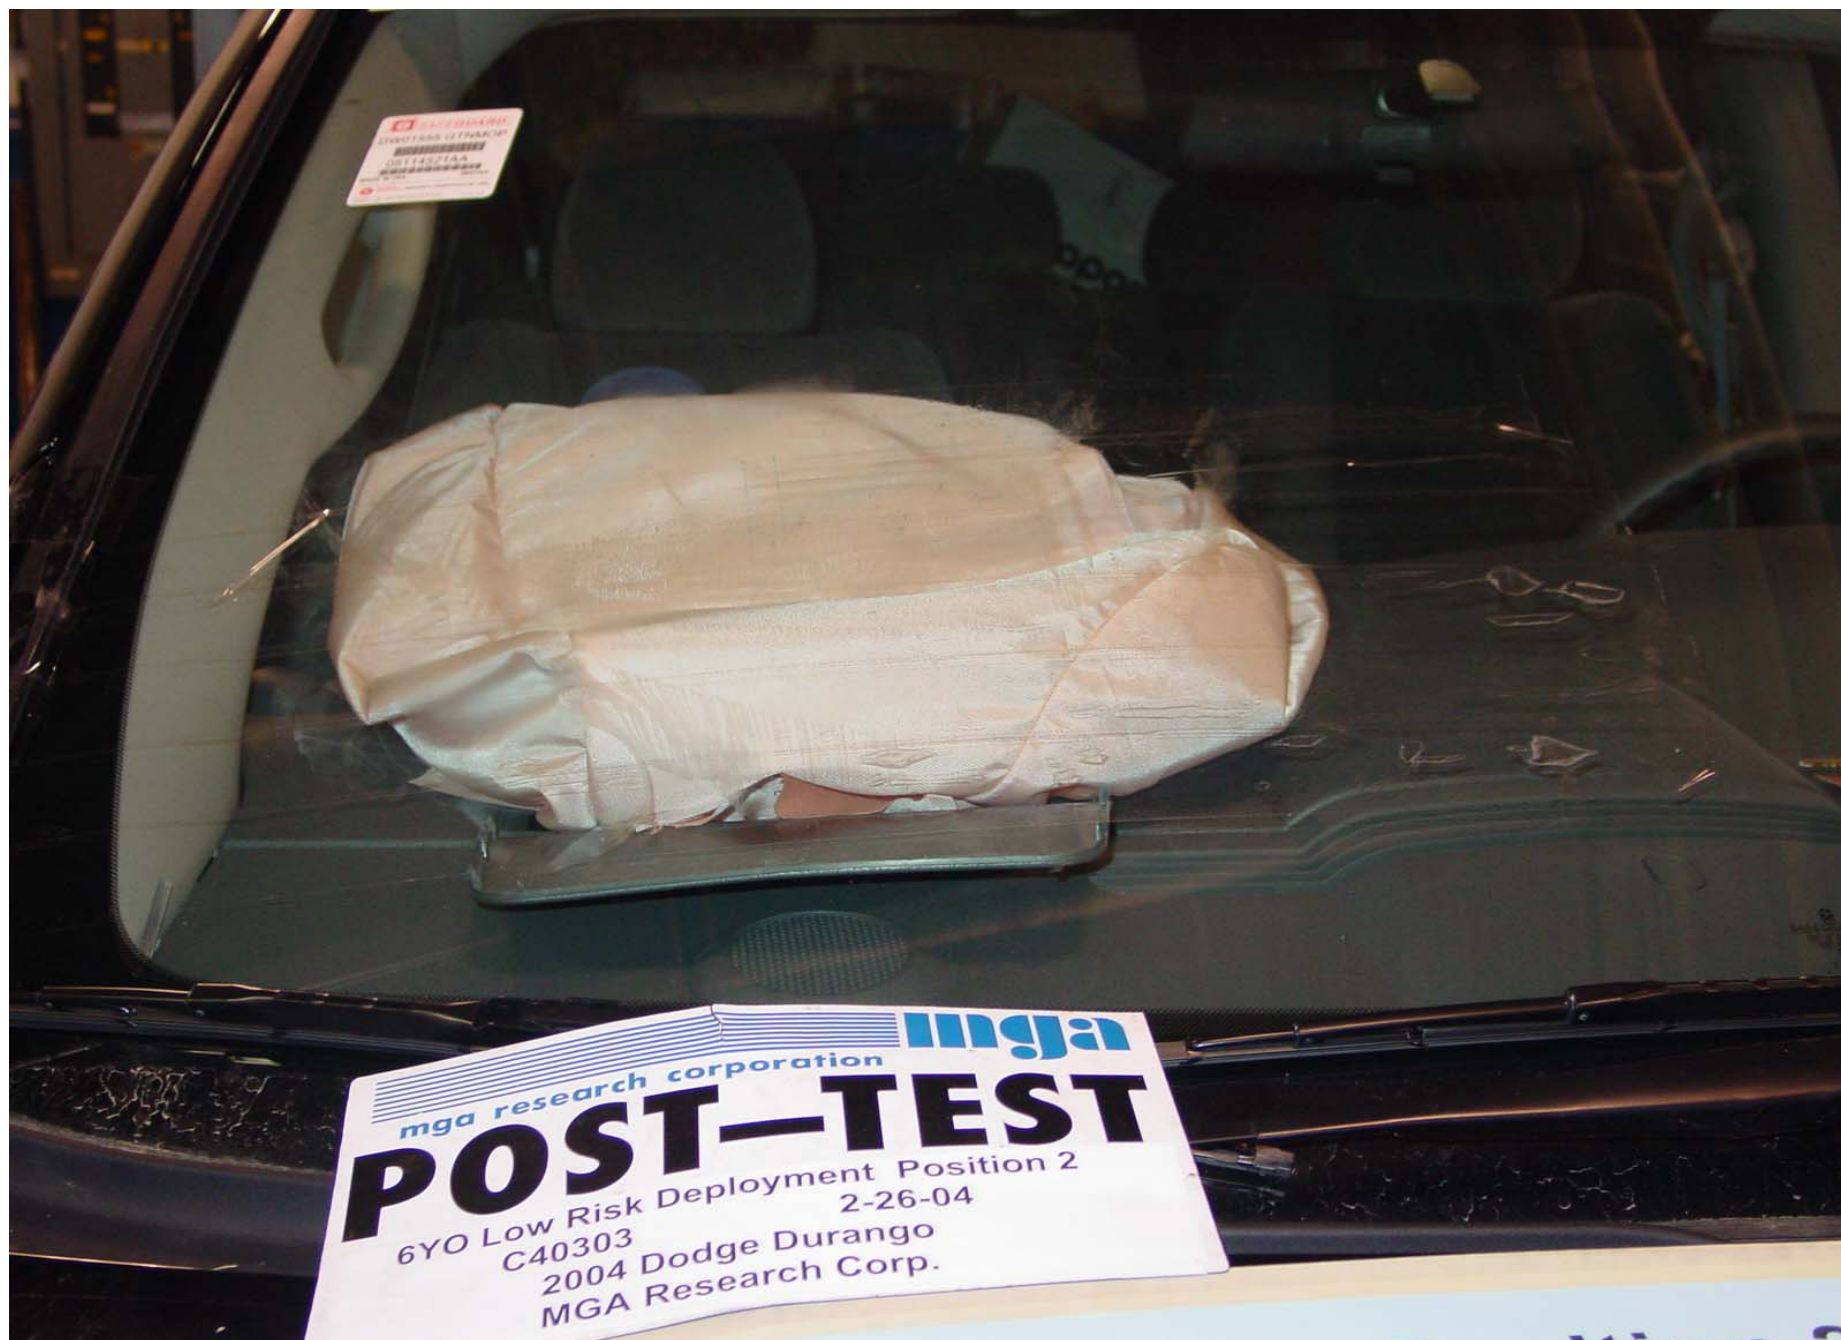

Post-Test 6YO P2 Passenger Dummy Head Frontal Position View

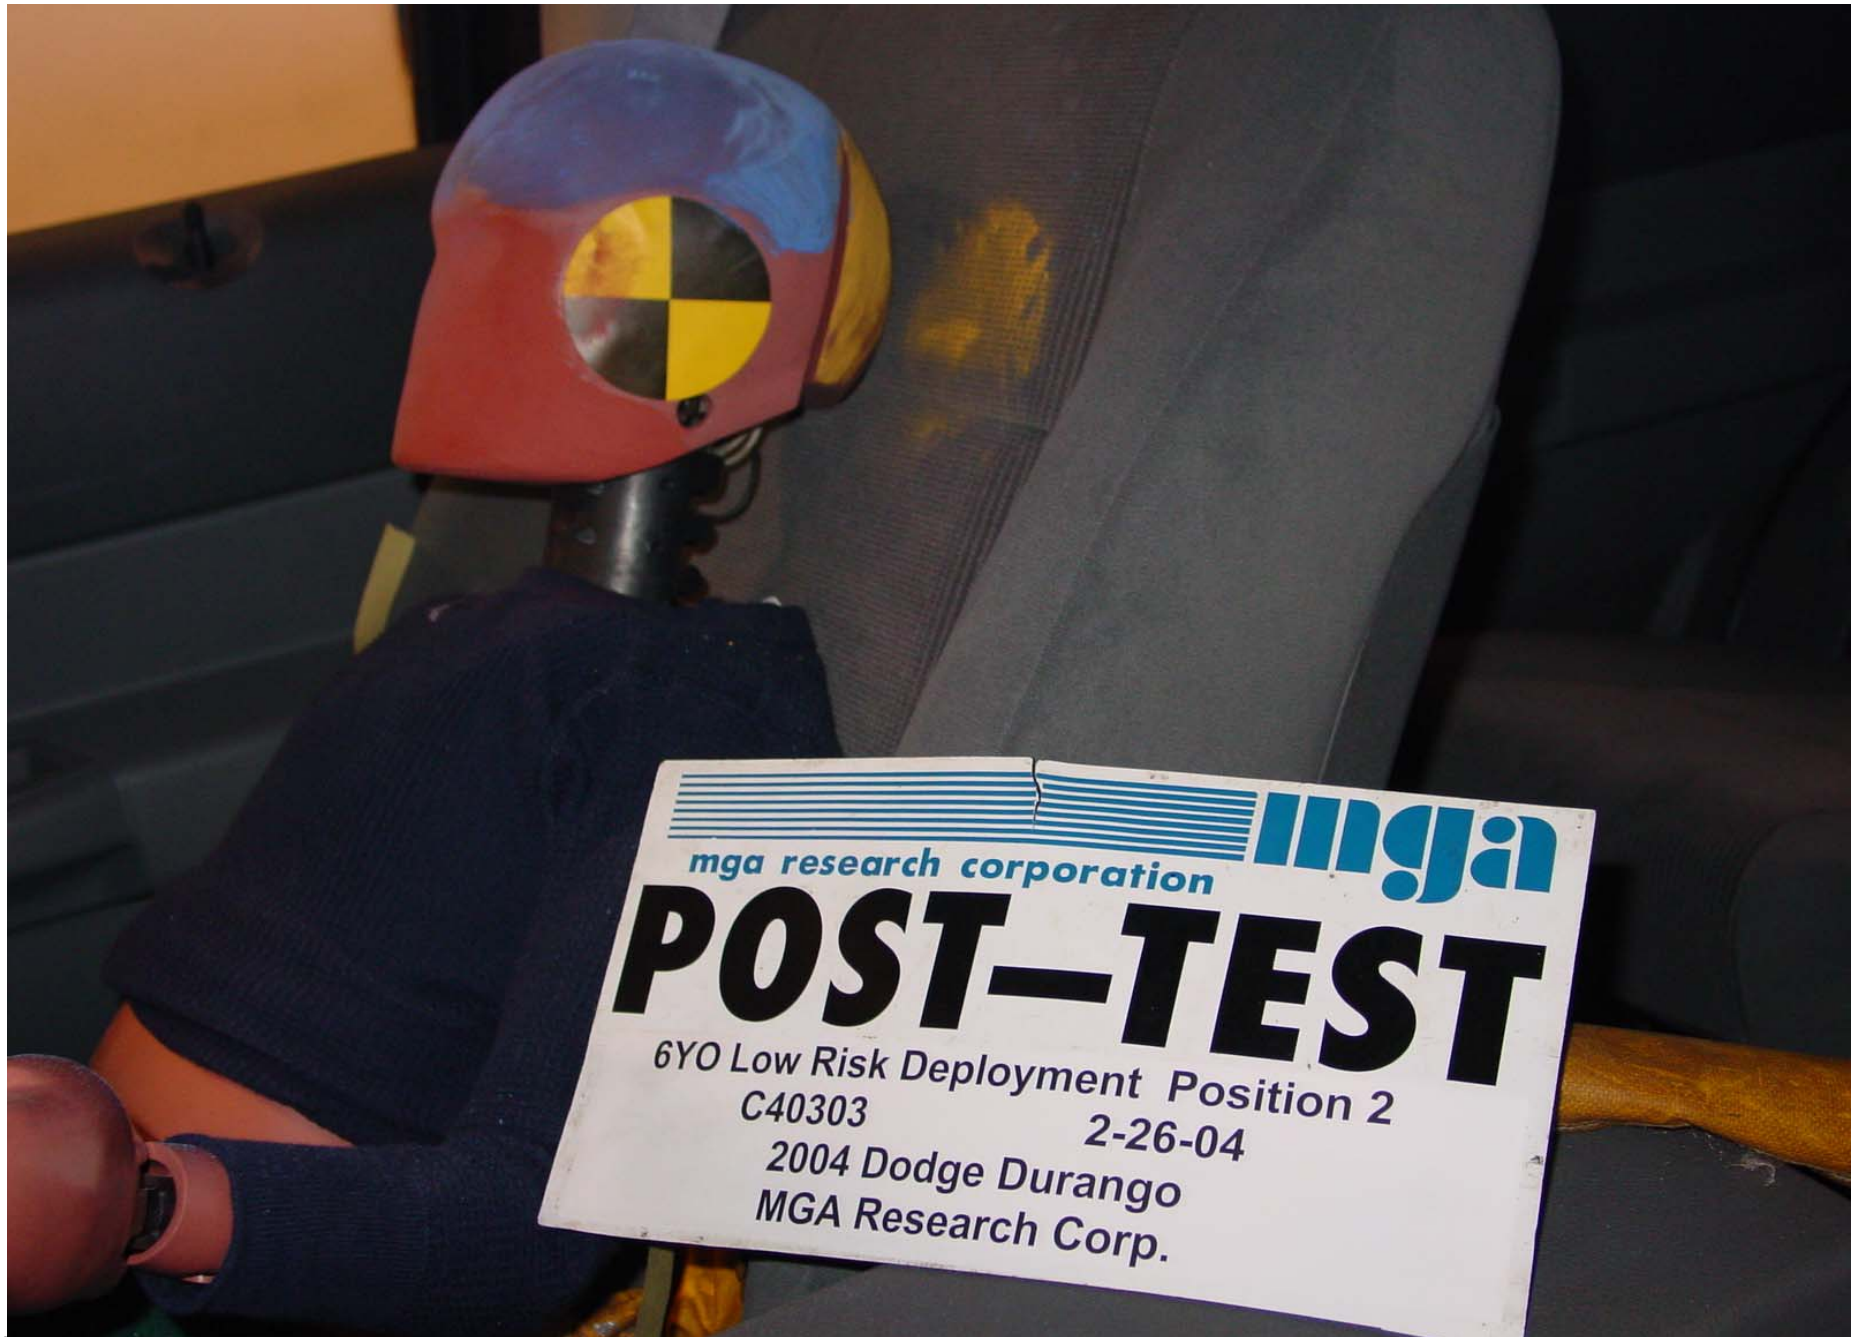

Post-Test 6YO P2 Passenger Dummy Head Contact View



Post-Test 6YO P2 Passenger Dummy Knee Contact View




Post-Test 6YO P2 Passenger Dummy Airbag Contact Left Side View



Post-Test 6YO P2 Passenger Dummy Airbag Contact Right Side View

Driver Geometric Center (2004 Dodge Durango)

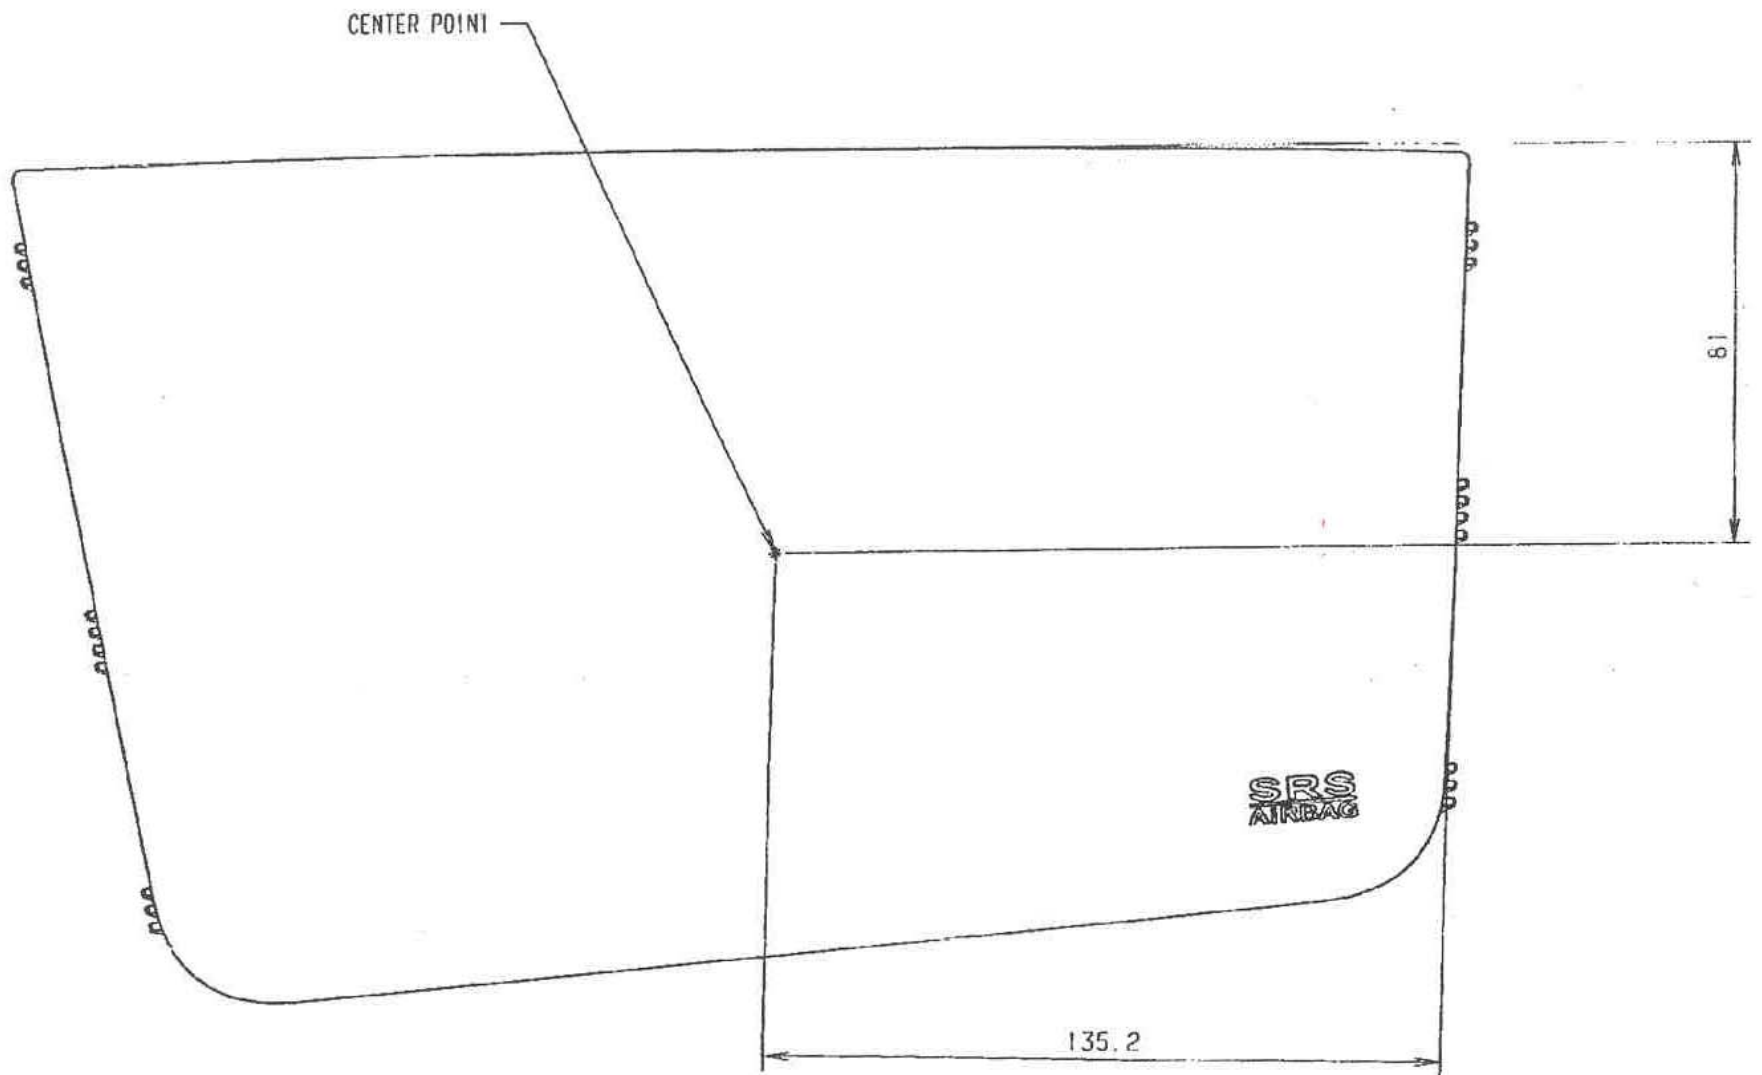

Passenger Geometric Center (2004 Dodge Durango)

APPENDIX E
SUPPRESSION PHOTOGRAPHS

TABLE OF PHOTOGRAPHS

	<u>Page #</u>
Photo No. 1. Cosco Dream Ride Car Bed Lateral With Belt, Rearward Seat Track	E-1
Photo No. 2. Cosco Dream Ride Car Bed F/A With Belt, Rearward Seat Track	E-1
Photo No. 3. Unbelted 5 th Percentile Female Reactivation, Rearward Seat Track	E-1
Photo No. 4. Britax Handle With Care 191 With Belt, Forward Seat Track, Handle Down	E-2
Photo No. 5. Britax Handle With Care 191 With Belt, Middle Seat Track, Handle Down	E-2
Photo No. 6. Britax Handle With Care 191 With Belt, Rearward Seat Track, Handle Down	E-2
Photo No. 7. Britax Handle With Care 191 Unbelted, Forward Seat Track, Handle Down	E-2
Photo No. 8. Britax Handle With Care 191 Unbelted, Middle Seat Track, Handle Down	E-3
Photo No. 9. Britax Handle With Care 191 Unbelted, Rearward Seat Track, Handle Down	E-3
Photo No. 10. Britax Handle With Care 191 Fwd Facing Unbelted, Forward Seat Track, Handle Down	E-3
Photo No. 11. Britax Handle With Care 191 Fwd Facing Unbelted, Middle Seat Track, Handle Down	E-3
Photo No. 12. Britax Handle With Care 191 Fwd Facing Unbelted, Rearward Seat Track, Handle Down	E-4
Photo No. 13. Unbelted 5 th Percentile Female Reactivation, Rearward Seat Track	E-4
Photo No. 14. Evenflo First Choice 204 With Belt, Forward Seat Track, Handle Up	E-5
Photo No. 15. Evenflo First Choice 204 With Belt, Middle Seat Track, Handle Down	E-5
Photo No. 16. Evenflo First Choice 204 With Belt, Rearward Seat Track, Handle Down	E-5
Photo No. 17. Evenflo First Choice 204 Unbelted, Forward Seat Track, Handle Up	E-5
Photo No. 18. Evenflo First Choice 204 Unbelted, Middle Seat Track, Handle Up	E-6
Photo No. 19. Evenflo First Choice 204 Unbelted, Rearward Seat Track, Handle Down	E-6
Photo No. 20. Evenflo First Choice 204 Fwd Facing Unbelted, Forward Seat Track, Handle Up	E-6
Photo No. 21. Evenflo First Choice 204 Fwd Facing Unbelted, Middle Seat Track, Handle Up	E-6
Photo No. 22. Evenflo First Choice 204 Fwd Facing Unbelted, Rearward Seat Track, Handle Up	E-7
Photo No. 23. Unbelted 5 th Percentile Female Reactivation, Middle Seat Track	E-7
Photo No. 24. Graco Infant W/ Base With Belt, Forward Seat Track, Handle Up	E-8
Photo No. 25. Graco Infant W/ Base With Belt, Middle Seat Track, Handle Down	E-8
Photo No. 26. Graco Infant W/ Base With Belt, Rearward Seat Track, Handle Down	E-8
Photo No. 27. Graco Infant W/ Base Unbelted, Forward Seat Track, Handle Up	E-8
Photo No. 28. Graco Infant W/ Base Unbelted, Middle Seat Track, Handle Down	E-9
Photo No. 29. Graco Infant W/ Base Unbelted, Rearward Seat Track, Handle Down	E-9
Photo No. 30. Graco Infant W/ Base Fwd Facing Unbelted, Forward Seat Track, Handle Up	E-9
Photo No. 31. Graco Infant W/ Base Fwd Facing Unbelted, Middle Seat Track, Handle Up	E-9
Photo No. 32. Graco Infant W/ Base Fwd Facing Unbelted, Rearward Seat Track, Handle Up	E-10
Photo No. 33. Graco Infant W/O Base With Belt, Forward Seat Track, Handle Up	E-10

Photo No. 34.	Graco Infant W/O Base With Belt, Middle Seat Track, Handle Down	E-10
Photo No. 35.	Graco Infant W/O Base With Belt, Rearward Seat Track, Handle Down	E-10
Photo No. 36.	Graco infant W/O Base Unbelted, Forward Seat Track, Handle Up	E-11
Photo No. 37.	Graco Infant W/O Base Unbelted, Middle Seat Track, Handle Down	E-11
Photo No. 38.	Graco Infant W/O Base Unbelted, Rearward Seat Track, Handle Down	E-11
Photo No. 39.	Graco Infant W/O Base Fwd Facing Unbelted, Forward Seat Track, Handle Up	E-11
Photo No. 40.	Graco Infant W/O Base Fwd Facing Unbelted, Middle Seat Track, Handle Up	E-12
Photo No. 41.	Graco Infant W/O Base Fwd Facing Unbelted, Rearward Seat Track, Handle Up	E-12
Photo No. 42.	Unbelted 5 th Percentile Female Reactivation, Rearward Seat Track	E-12
Photo No. 43.	Britax Roundabout 161 Fwd Facing With Belt, Forward Seat Track	E-13
Photo No. 44.	Britax Roundabout 161 Fwd Facing With Belt, Middle Seat Track	E-13
Photo No. 45.	Britax Roundabout 161 Fwd Facing With Belt, Rearward Seat Track	E-13
Photo No. 46.	Britax Roundabout 161 Fwd Facing Unbelted, Forward Seat Track	E-13
Photo No. 47.	Britax Roundabout 161 Fwd Facing Unbelted, Middle Seat Track	E-14
Photo No. 48.	Britax Roundabout 161 Fwd Facing Unbelted, Rearward Seat Track	E-14
Photo No. 49.	Britax Roundabout 161 Rear Facing With Belt, Forward Seat Track	E-14
Photo No. 50.	Britax Roundabout 161 Rear Facing With Belt, Middle Seat Track	E-14
Photo No. 51.	Britax Roundabout 161 Rear Facing With Belt, Rearward Seat Track	E-15
Photo No. 52.	Britax Roundabout 161 Rear Facing Unbelted, Forward Seat Track	E-15
Photo No. 53.	Britax Roundabout 161 Rear Facing Unbelted, Middle Seat Track	E-15
Photo No. 54.	Britax Roundabout 161 Rear Facing Unbelted, Rearward Seat Track	E-15
Photo No. 55.	Unbelted 5 th Percentile Female Reactivation, Rearward Seat Track	E-16
Photo No. 56.	Century Encore Fwd Facing With Belt, Forward Seat Track	E-17
Photo No. 57.	Century Encore Fwd Facing With Belt, Middle Seat Track	E-17
Photo No. 58.	Century Encore Fwd Facing With Belt, Rearward Seat Track	E-17
Photo No. 59.	Century Encore Fwd Facing Unbelted, Forward Seat Track	E-17
Photo No. 60.	Century Encore Fwd Facing Unbelted, Middle Seat Track	E-18
Photo No. 61.	Century Encore Fwd Facing Unbelted, Rearward Seat Track	E-18
Photo No. 62.	Century Encore Rear Facing With Belt, Forward Seat Track	E-18
Photo No. 63.	Century Encore Rear Facing With Belt, Middle Seat Track	E-18
Photo No. 64.	Century Encore Rear Facing With Belt, Rearward Seat Track	E-19
Photo No. 65.	Century Encore Rear Facing Unbelted, Forward Seat Track	E-19
Photo No. 66.	Century Encore Rear Facing Unbelted, Middle Seat Track	E-19
Photo No. 67.	Century Encore Rear Facing Unbelted, Rearward Seat Track	E-19
Photo No. 68.	Unbelted 5 th Percentile Female Reactivation, Middle Seat Track	E-20

		<u>Page #</u>
Photo No. 69.	Evenflo Medallion 254 Fwd Facing With Belt, Forward Seat Track	E-21
Photo No. 70.	Evenflo Medallion 254 Fwd Facing With Belt, Middle Seat Track	E-21
Photo No. 71.	Evenflo Medallion 254 Fwd Facing With Belt, Rearward Seat Track	E-21
Photo No. 72.	Evenflo Medallion 254 Fwd Facing Unbelted, Forward Seat Track	E-21
Photo No. 73.	Evenflo Medallion 254 Fwd Facing Unbelted, Middle Seat Track	E-22
Photo No. 74.	Evenflo Medallion 254 Fwd Facing Unbelted, Rearward Seat Track	E-22
Photo No. 75.	Evenflo Medallion 254 Rear Facing With Belt, Forward Seat Track	E-22
Photo No. 76.	Evenflo Medallion 254 Rear Facing With Belt, Middle Seat Track	E-22
Photo No. 77.	Evenflo Medallion 254 Rear Facing With Belt, Rearward Seat Track	E-23
Photo No. 78.	Evenflo Medallion 254 Rear Facing Unbelted, Forward Seat Track	E-23
Photo No. 79.	Evenflo Medallion 254 Rear Facing Unbelted, Middle Seat Track	E-23
Photo No. 80.	Evenflo Medallion 254 Rear Facing Unbelted, Rearward Seat Track	E-23
Photo No. 81.	Unbelted 5 th Percentile Female Reactivation, Forward Seat Track	E-24

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

Newborn

Section A

Car Bed



Cosco Dream Ride Car Bed Lateral With Belt,
Rearward Seat Track



Cosco Dream Ride Car Bed F/A With Belt,
Rearward Seat Track



Unbelted 5th Percentile Female Reactivation,
Rearward Seat Track

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

12 Month

Section B

Rear Facing CRS



Britax Handle With Care 191 With Belt,
Forward Seat Track, Handle Down



Britax Handle With Care 191 With Belt,
Middle Seat Track, Handle Down



Britax Handle With Care 191 With Belt,
Rearward Seat Track, Handle Down



Britax Handle With Care 191 Unbelted,
Forward Seat Track, Handle Down

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

12 Month

Section B

Rear Facing CRS



Britax Handle With Care 191 Unbelted,
Middle Seat Track, Handle Down



Britax Handle With Care 191 Unbelted,
Rearward Seat Track, Handle Down



Britax Handle With Care 191 Fwd Facing Unbelted,
Forward Seat Track, Handle Down



Britax Handle With Care 191 Fwd Facing Unbelted,
Middle Seat Track, Handle Down

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

12 Month

Section B

Rear Facing CRS



Britax Handle With Care 191 Fwd Facing Unbelted
Rearward Seat Track, Handle Down



Unbelted 5th Percentile Female Reactivation,
Rearward Seat Track

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

12 Month

Section B

Rear Facing CRS

E-15



Evenflo First Choice 204 With Belt,
Forward Seat Track, Handle Up



Evenflo First Choice 204 With Belt,
Middle Seat Track, Handle Down



Evenflo First Choice 204 With Belt,
Rearward Seat Track, Handle Down



Evenflo First Choice 204 Unbelted,
Forward Seat Track, Handle Up

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

12 Month

Section B

Rear Facing CRS



Evenflo First Choice 204 Unbelted,
Middle Seat Track, Handle Up



Evenflo First Choice 204 Unbelted,
Rearward Seat Track, Handle Down



Evenflo First Choice 204 Fwd Facing Unbelted,
Forward Seat Track, Handle Up



Evenflo First Choice 204 Fwd Facing Unbelted,
Middle Seat Track, Handle Up

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

12 Month

Section B

Rear Facing CRS



Evenflo First Choice 204 Fwd Facing Unbelted,
Rearward Seat Track, Handle Up



Unbelted 5th Percentile Female Reactivation,
Middle Seat Track

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

12 Month

Section B

Rear Facing CRS



Graco Infant W/ Base With Belt,
Forward Seat Track, Handle Up



Graco Infant W/ Base With Belt,
Middle Seat Track, Handle Down



Graco Infant W/ Base With Belt,
Rearward Seat Track, Handle Down



Graco Infant W/ Base Unbelted,
Forward Seat Track, Handle Up

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

12 Month

Section B

Rear Facing CRS



Graco Infant W/ Base Unbelted,
Middle Seat Track, Handle Down



Graco Infant W/ Base Unbelted,
Rearward Seat Track, Handle Down



Graco Infant W/ Base Fwd Facing Unbelted,
Forward Seat Track, Handle Up



Graco Infant W/ Base Fwd Facing Unbelted,
Middle Seat Track, Handle Up

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

12 Month

Section B

Rear Facing CRS



Graco Infant W/ Base Fwd Facing Unbelted,
Rearward Seat Track, Handle Up



Graco Infant W/O Base With Belt,
Forward Seat Track, Handle Up



Graco Infant W/O Base With Belt,
Middle Seat Track, Handle Down



Graco Infant W/O Base With Belt,
Rearward Seat Track, Handle Down

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

12 Month

Section B

Rear Facing CRS



Graco infant W/O Base Unbelted,
Forward Seat Track, Handle Up



Graco Infant W/O Base Unbelted,
Middle Seat Track, Handle Down



Graco Infant W/O Base Unbelted,
Rearward Seat Track, Handle Down



Graco Infant W/O Base Fwd Facing Unbelted,
Forward Seat Track, Handle Up

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

12 Month

Section B

Rear Facing CRS



Graco Infant W/O Base Fwd Facing Unbelted,
Middle Seat Track, Handle Up



Graco Infant W/O Base Fwd Facing Unbelted,
Rearward Seat Track, Handle Up



Unbelted 5th Percentile Female Reactivation,
Rearward Seat Track

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

12 Month

Section C

Forward Facing Convertible CRS



Britax Roundabout 161 Fwd Facing With Belt,
Forward Seat Track



Britax Roundabout 161 Fwd Facing With Belt,
Middle Seat Track



Britax Roundabout 161 Fwd Facing With Belt,
Rearward Seat Track



Britax Roundabout 161 Fwd Facing Unbelted,
Forward Seat Track

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

12 Month

Section C

Forward Facing Convertible CRS



Britax Roundabout 161 Fwd Facing Unbelted,
Middle Seat Track



Britax Roundabout 161 Fwd Facing Unbelted,
Rearward Seat Track



Britax Roundabout 161 Rear Facing With Belt,
Forward Seat Track



Britax Roundabout 161 Rear Facing With Belt,
Middle Seat Track

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

12 Month

Section C

Forward Facing Convertible CRS



Britax Roundabout 161 Rear Facing With Belt,
Rearward Seat Track



Britax Roundabout 161 Rear Facing Unbelted,
Forward Seat Track



Britax Roundabout 161 Rear Facing Unbelted,
Middle Seat Track



Britax Roundabout 161 Rear Facing Unbelted,
Rearward Seat Track

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

12 Month

Section C

Forward Facing Convertible CRS



Unbelted 5th Percentile Female Reactivation,
Rearward Seat Track

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

12 Month

Section C

Forward Facing Convertible CRS



Century Encore Fwd Facing With Belt,
Forward Seat Track



Century Encore Fwd Facing With Belt,
Middle Seat Track



Century Encore Fwd Facing With Belt,
Rearward Seat Track



Century Encore Fwd Facing Unbelted,
Forward Seat Track

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

12 Month

Section C

Forward Facing Convertible CRS



Century Encore Fwd Facing Unbelted,
Middle Seat Track



Century Encore Fwd Facing Unbelted,
Rearward Seat Track



Century Encore Rear Facing With Belt,
Forward Seat Track



Century Encore Rear Facing With Belt,
Middle Seat Track

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

12 Month

Section C

Forward Facing Convertible CRS



Century Encore Rear Facing With Belt,
Rearward Seat Track



Century Encore Rear Facing Unbelted,
Forward Seat Track



Century Encore Rear Facing Unbelted,
Middle Seat Track



Century Encore Rear Facing Unbelted,
Rearward Seat Track

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

12 Month

Section C

Forward Facing Convertible CRS



Unbelted 5th Percentile Female Reactivation,
Middle Seat Track

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

12 Month

Section C

Forward Facing Convertible CRS



Evenflo Medallion 254 Fwd Facing With Belt,
Forward Seat Track



Evenflo Medallion 254 Fwd Facing With Belt,
Middle Seat Track



Evenflo Medallion 254 Fwd Facing With Belt,
Rearward Seat Track



Evenflo Medallion 254 Fwd Facing Unbelted,
Forward Seat Track

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

12 Month

Section C

Forward Facing Convertible CRS



Evenflo Medallion 254 Fwd Facing Unbelted,
Middle Seat Track



Evenflo Medallion 254 Fwd Facing Unbelted,
Rearward Seat Track



Evenflo Medallion 254 Rear Facing With Belt,
Forward Seat Track



Evenflo Medallion 254 Rear Facing With Belt,
Middle Seat Track

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

12 Month

Section C

Forward Facing Convertible CRS



Evenflo Medallion 254 Rear Facing With Belt,
Rearward Seat Track



Evenflo Medallion 254 Rear Facing Unbelted,
Forward Seat Track



Evenflo Medallion 254 Rear Facing Unbelted,
Middle Seat Track



Evenflo Medallion 254 Rear Facing Unbelted,
Rearward Seat Track

DOT/NHTSA 208 Suppression Test - 2004 Dodge Durango (C40303)

12 Month

Section C

Forward Facing Convertible CRS



Unbelted 5th Percentile Female Reactivation,
Forward Seat Track

APPENDIX F
INSTRUMENTATION CALIBRATION

INSTRUMENTS FOR DRIVER DUMMY NO. 505

	SERIAL NO.	MANUFACTURER	CALIBRATION DATE
Head X	APYN0	Endevco	2/20/04
Head Y	ALFJ7	Endevco	2/20/04
Head Z	APYN3	Endevco	2/20/04
Neck Load Cell	1561	Denton	1/13/04
Chest X	J12471	Endevco	1/14/04
Chest Y	AP179	Endevco	1/13/04
Chest Z	J12423	Endevco	1/14/04
Chest Displacement	505	Servo	3/30/04
Left Femur Load Cell	946	GSE	1/17/04
Right Femur Load Cell	945	GSE	1/17/04
Right Upper Tibia Load Cell	80	Denton	8/22/03
Right Lower Tibia Load Cell	78	Denton	8/21/03
Left Upper Tibia Load Cell	82	Denton	8/22/03
Left Lower Tibia Load Cell	82	Denton	8/21/03
Left Knee Shear	021208	Servo	3/24/04
Right Knee Shear	022338	Servo	3/24/04
Left Tibia Mid-Shaft X	AP122	Endevco	3/24/04
Left Tibia Mid-Shaft Y	J18925	Endevco	3/24/04
Right Tibia Mid-Shaft X	P26984	Endevco	2/04/04
Right Tibia Mid-Shaft Y	P26989	Endevco	2/04/04
Left Mid-Foot X	AHT12	Endevco	3/24/04
Left Mid-Foot Y	AH0C3	Endevco	3/24/04
Left Mid-Foot Z	AHTN3	Endevco	3/24/04
Right Mid-Foot X	P22454	Endevco	2/03/04
Right Mid-Foot Y	P22972	Endevco	2/02/04
Right Mid-Foot Z	P22688	Endevco	2/02/04
Left Dorsi/Plantar Flexion	108	FTSS	12/17/03
Right Dorsi/Plantar Flexion	107	FTSS	12/17/03

INSTRUMENTS FOR PASSENGER DUMMY NO. 511

	SERIAL NO.	MANUFACTURER	CALIBRATION DATE
Head X	AJ819	Endevco	1/13/04
Head Y	AJ7A2	Endevco	1/13/04
Head Z	AJ9J7	Endevco	1/13/04
Neck Load Cell	1713	Denton	2/28/04
Chest X	AGRW3	Endevco	1/13/04
Chest Y	AMPY0	Endevco	1/13/04
Chest Z	J14896	Endevco	1/13/04
Chest Displacement	511	Servo	2/24/04
Left Femur Load Cell	959	GSE	2/27/04
Right Femur Load Cell	950	GSE	2/27/04

INSTRUMENTS FOR CENTER REAR PASSENGER DUMMY NO. 401

	SERIAL NO.	MANUFACTURER	CALIBRATION DATE
Head X	AGH79	Endevco	2/25/04
Head Y	AGH89	Endevco	2/25/04
Head Z	AGH55	Endevco	2/25/04
Neck Load Cell	1703	Denton	2/25/04
Chest X	C12883	Endevco	2/25/04
Chest Y	C13081	Endevco	2/25/04
Chest Z	C12881	Endevco	2/25/04
Chest Displacement	401	Servo	2/25/04
Left Femur Load Cell	86	GSE	12/05/03
Right Femur Load Cell	85	GSE	12/05/03
Shoulder Belt Load Cell	172	Denton	10/11/03
Lap Belt Load Cell	198	Denton	12/09/03
Shoulder Belt Spoolout	607	Celesco	2/04/04
MHD Left	32	ATA Sensors	12/05/03
MHD Right	31	ATA Sensors	12/05/03

INSTRUMENTS FOR LOW RISK 5TH FEMALE DUMMY NO. 517 (P1, P2)

	SERIAL NO.	MANUFACTURER	CALIBRATION DATE
Head X	AH0B0	Endevco	1/13/04
Head Y	ALE80	Endevco	1/13/04
Head Z	AP1H2	Endevco	1/13/04
Neck Load Cell	253	Denton	10/17/03
Chest X	J12471	Endevco	1/14/04
Chest Y	AP179	Endevco	1/13/04
Chest Z	J12423	Endevco	1/14/04
Chest Displacement	517	Servo	1/26/04
Left Femur Load Cell	946	GSE	1/17/04
Right Femur Load Cell	945	GSE	1/17/04

INSTRUMENTS FOR LOW RISK 3 YEAR OLD PASSENGER DUMMY NO. 031 (P1, P2)

	SERIAL NO.	MANUFACTURER	CALIBRATION DATE
Head X	AJ7K3	Endevco	12/05/03
Head Y	J10411	Endevco	12/05/03
Head Z	AJ9T6	Endevco	12/05/03
Neck Load Cell	94	Denton	9/02/03
Chest X	P22099	Endevco	12/05/03
Chest Y	P22107	Endevco	12/05/03
Chest Z	P22659	Endevco	12/05/03
Chest Displacement	031	Servo	1/28/04

INSTRUMENTS FOR LOW RISK 6 YEAR OLD PASSENGER DUMMY NO. 153 (P1)

	SERIAL NO.	MANUFACTURER	CALIBRATION DATE
Head X	AJ9Y3	Endevco	2/20/04
Head Y	AMT78	Endevco	2/20/04
Head Z	ALCH7	Endevco	2/20/04
Neck Load Cell	1673	Denton	12/11/03
Chest X	AHY71	Endevco	2/23/04
Chest Y	AP1Y1	Endevco	2/23/04
Chest Z	ACC81	Endevco	2/23/04
Chest Displacement	153	Servo	2/11/04

INSTRUMENTS FOR LOW RISK 6 YEAR OLD PASSENGER DUMMY NO. 152 (P2)

	SERIAL NO.	MANUFACTURER	CALIBRATION DATE
Head X	AMTG3	Endevco	2/20/04
Head Y	AMTL6	Endevco	2/20/04
Head Z	ALC37	Endevco	2/20/04
Neck Load Cell	252	Denton	9/20/03
Chest X	AP120	Endevco	2/20/04
Chest Y	AP042	Endevco	2/20/04
Chest Z	ALEK9	Endevco	2/20/04
Chest Displacement	152	Servo	2/24/04

VEHICLE INSTRUMENTS

	SERIAL NO.	MANUFACTURER	CALIBRATION DATE
Left Rear Seat Crossmember X	C12-M08	Entran	10/08/03
Right Rear Seat Crossmember X	F20-F10	Entran	10/08/03
Top of Engine X	A27-R15	Entran	3/09/04
Bottom of Engine X	H20-R10	Entran	10/09/03
Left Brake Caliper X	H14-N13	Entran	11/07/03
Right Brake Caliper X	I15-Z12	Entran	11/12/03
Instrument Panel X	H21-J03	Entran	10/09/03
Trunk Z	L17-D29	Entran	1/30/04

APPENDIX G

NOTICE OF TEST FAILURE

LABORATORY NOTICE OF APPARENT TEST FAILURE TO OVSC

FMVSS NO. 208 TEST DATE: January 29, 2004

LABORATORY: MGA Research Corporation

CONTRACT NO.: DTNH22-03-D-11002 DELV. ORDER NO.: Contract

LABORATORY PROJECT ENGINEER'S NAME: Jeff Lewandowski

TEST SPECIMEN DESCRIPTION: 2004 Dodge Durango MPV

VEHICLE NHTSA NO.: C40303 VIN: 1D4HD48N04F114309

MFR: Daimler Chrysler Corp.

APPARENT TEST FAILURE DESCRIPTION: Air bag labeling on Data Sheet 5

3.6.3 Is the shortest distance from any of the lettering or graphics on the rollover-warning label to any of the lettering or graphics of the air bag warning label at least 3 cm? (575.105(d)(1)(iv)(A))

17mm (1.7cm) actual distance

Yes-Pass X **No-FAIL**

FMVSS REQUIREMENT, PARAGRAPH S___ :

S.4.5.1 Air Bag Labels

NOTIFICATION TO NHTSA (COTR): Charles Case

DATE: 1-29-2004 BY: Jeff Lewandowski

REMARKS: See Included Photo



2004 Dodge Durango MPV S.4.5.1 Air Bag Labeling Failure (Data Sheet 5 – 3.6.3)