

**REPORT NUMBER: NCAP-MGA-2005-012**

**NEW CAR ASSESSMENT PROGRAM  
FRONTAL BARRIER IMPACT TEST**

**NISSAN MOTOR COMPANY  
2005 NISSAN FRONTIER  
NHTSA NUMBER: M55210**

**PREPARED BY:  
MGA RESEARCH CORPORATION  
5000 WARREN ROAD  
BURLINGTON, WI 53105**



**Test Date: February 7, 2005**

**Final Report Date: March 28, 2005**

**FINAL REPORT**

**PREPARED FOR:  
U.S. DEPARTMENT OF TRANSPORTATION  
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION  
RULEMAKING  
OFFICE OF CRASHWORTHINESS STANDARDS  
400 SEVENTH STREET, SW, ROOM 5311  
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Safety Administration, in response to Contract Number DTNH22-01-D-12005.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: Shefalika Naik  
Shefalika Naik, Project Engineer

Date: 3/28/05

Reviewed by: David Winkelbauer  
David Winkelbauer, Facility Director

Date: 3/28/05

FINAL REPORT ACCEPTED BY:

\_\_\_\_\_  
Manager, New Car Assessment Program

\_\_\_\_\_  
Date of Acceptance

\_\_\_\_\_  
COTR, NCAP Frontal Impact Program

\_\_\_\_\_  
Date of Acceptance

**Technical Report Documentation Page**

1. Report No. NCAP-MGA-2005-012		2. Government Accession No.		3. Recipient's Catalog No.																										
4. Title and Subtitle Final Report of New Car Assessment Program Testing of a 2005 Nissan Frontier NHTSA No.: M55210		5. Report Date March 28, 2005		6. Performing Organization Code MGA																										
		7. Author(s) Shefalika Naik, Project Engineer		8. Performing Organization Report No. NCAP-MGA-2005-012																										
9. Performing Organization Name and Address MGA Research Corporation 5000 Warren Road Burlington, WI 53105		10. Work Unit No.		11. Contract or Grant No. DTNH22-01-D-12005																										
		12. Sponsoring Agency Name and Address  U.S. Department of Transportation National Highway Traffic Safety Administration Rulemaking, Office of Crashworthiness Standards 400 Seventh Street, SW, Room 5311 Washington, D.C. 20590		13. Type of Report and Period Covered 2/07/2005 to 3/28/05																										
				14. Sponsoring Agency Code NVS-111																										
15. Supplementary Notes																														
16. Abstract A 35.0 mph (56.3 km/h) frontal barrier impact was conducted on a 2005 Nissan Frontier at MGA Research Corporation on February 07, 2005. This test was conducted to obtain data indicant of FMVSS 208, 212, 219 (partial), 301, and foot well intrusion performance. The impact velocity was 56.3 km/h. The ambient temperature at the barrier face at the time of impact was 21 degrees Celsius. The vehicle's maximum post test static crush is 488 mm located on the center of the vehicle. The test vehicle is equipped with a 3-point continuous belt system and an airbag in both front outboard seating positions. With respect to FMVSS 208 "Occupant Crash Protection", the occupant injury criteria summary is as follows:																														
<table border="1"> <thead> <tr> <th><u>Measurement Description</u></th> <th><u>Units</u></th> <th><u>Threshold</u></th> <th><u>Driver ATD</u></th> <th><u>Pass. ATD</u></th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC)</td> <td>N/A</td> <td>1000</td> <td>636</td> <td>575</td> </tr> <tr> <td>Max. Thorax Accel. (3ms Clip)</td> <td>G's</td> <td>60</td> <td>48</td> <td>52</td> </tr> <tr> <td>Left Femur Force</td> <td>Newton</td> <td>10009</td> <td>-5039</td> <td>-3611</td> </tr> <tr> <td>Right Femur Force</td> <td>Newton</td> <td>10009</td> <td>-3620</td> <td>-2861</td> </tr> </tbody> </table>						<u>Measurement Description</u>	<u>Units</u>	<u>Threshold</u>	<u>Driver ATD</u>	<u>Pass. ATD</u>	Head Injury Criteria (HIC)	N/A	1000	636	575	Max. Thorax Accel. (3ms Clip)	G's	60	48	52	Left Femur Force	Newton	10009	-5039	-3611	Right Femur Force	Newton	10009	-3620	-2861
<u>Measurement Description</u>	<u>Units</u>	<u>Threshold</u>	<u>Driver ATD</u>	<u>Pass. ATD</u>																										
Head Injury Criteria (HIC)	N/A	1000	636	575																										
Max. Thorax Accel. (3ms Clip)	G's	60	48	52																										
Left Femur Force	Newton	10009	-5039	-3611																										
Right Femur Force	Newton	10009	-3620	-2861																										
17. Key Words  56.3 km/h NCAP Frontal Barrier Impact Test New Car Assessment Program (NCAP) 2005 Nissan Frontier NHTSA No: M55210			18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Admin., Technical Ref. Division, Room 5108 (NPO-230) 400 Seventh Street, S.W. Washington, D.C. 20590																											
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of Pages 211	22. Price																									

## TABLE OF CONTENTS

<u>Section</u>		<u>Page No</u>
1	Purpose and Summary of the Test	1
2	Occupant and Vehicle Information / Data Sheets	3

<u>Data Sheet No.</u>		<u>Page No.</u>
1	Crash Test Summary	4
2	General Test and Vehicle Parameter Data	5
3	Test Vehicle Tire Information	7
4	Post Impact Data	8
5	Test Vehicle Information	9
6	Dummy Positioning in Vehicle	11
7	Seat Belt Positioning Data	13
8	Vehicle Accelerometer Location and Data Summary	14
9	Hybrid III ATD Injury Criteria and Sensor Data	15
10	Seat Belt Performance Assessment Test Data	18
11	Summary of FMVSS 212 Data	19
12	Windshield Zone Intrusion FMVSS 219 Data	20
13	FMVSS 301 Fuel System Integrity Post Impact Data	21
14	FMVSS 301 Static Rollover Data	22
15	Vehicle Measurements	23
16	Camera Locations	26
17	Photographic Reference Target Locations	28
18	Vehicle Intrusion Measurements	29
19	Load Cell Locations on Fixed Barrier	34
20	Accident Investigation Division Data	35
21	Dummy/Vehicle Temperature Stabilization Chart	36

<u>Appendix</u>		
A	Photographs	A
B	Dummy and Vehicle Response Data Traces	B
C	Dummy Calibration Data Traces and Tables	C
D	Test Equipment and Instrumentation Calibration	D

## SECTION 1

### PURPOSE AND SUMMARY OF TEST

#### PURPOSE

This 56.3 km/h frontal barrier impact test is part of the Vehicle Barrier Impact Testing Program sponsored by the National Highway Traffic Safety Administration (NHTSA) under contract number DTNH22-01-D-12005. The purpose of this test was to obtain vehicle crashworthiness and occupant restraint system performance data for an impact in excess of the current 48.3 kph requirements.

#### SUMMARY

A load cell barrier consisting of 132 load cells was impacted by a 2005 Nissan Frontier at a velocity of 56.3 kph. The test was performed at MGA Research Corporation on February 7, 2005. Pre- and post-test photographs of the vehicle and dummies can be found in Appendix A.

One real-time camera and sixteen high-speed cameras were used to document the frontal barrier impact event. Camera locations and other pertinent camera information can be found in this report.

Two Part 572E, 50<sup>th</sup> percentile male anthropomorphic test devices (ATDs), were placed in the driver and right-front passenger seating positions according to dummy placement instructions specified in the Laboratory Indicant Test Procedure.

Both ATDs were fully instrumented with head, chest and pelvis tri-axial accelerometers, chest displacement potentiometer, upper neck transducers, right/left femur load cells, and lower leg instrumentation. The driver (position 1) ATD (Serial No. 066) and right-front passenger (position 2) ATD (Serial No. 065) were calibrated previous to this test. Certification details, along with instrumentation calibration data, are found in Appendix C.

The 277 channels of data were recorded on an on-board data acquisition system. Appendix B contains the vehicle and dummy response data traces.

There was 100 percent windshield retention and no intrusion into the protected zone of the windshield during the event. There was no Stoddard Solvent leakage after the event or during any phase of the static rollover.

The maximum static crush of the vehicle was 488 mm and both the driver and passenger side doors remained closed and latched during the impact event and were operable after the impact.

The driver's head, chest, and abdomen contacted the airbag. The driver's head also contacted the headrest. The driver's knees contacted the bolster and steering column. The passenger's head and chest contacted the airbag. The passenger's head also contacted the headrest and visor. The passenger's knees contacted the glove box.

The occupant data is summarized below:

ATD position	HIC	Clip (g)	Chest Disp. (mm)	Left Femur (N)	Right Femur (N)
Driver	636.1	48.2	-29.9	-5039	-3620
Passenger	575.4	51.6	-28.7	-3611	-2861

### TEST NOTES

No valid data was collected for the following:

Driver Right Upper Tibia MY after 140 ms  
Passenger Head Y Redundant  
Barrier 1-10  
Barrier 6-9

Barrier load cell locations that were not used:

1-1 through 1-6  
1-11 through 1-16

The spare tire came off on impact.

## SECTION 2

### OCCUPANT AND VEHICLE INFORMATION / DATA SHEETS

Test Vehicle: 2005 Nissan Frontier  
Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
Test Date: 02/07/2005

#### CONVERSION FACTORS USED IN THIS REPORT\*

Quantity	Typical Application	English Units	Metric Unit	Multiply By
Mass	Vehicle Weight	lb	kg	0.4536
Linear Velocity	Impact Velocity	mile/h	km/h	1.609
Length or Distance	Measurements	in	mm	25.4
Volume	Fuel Systems	gal	liter	3.785
Volume	Small Fluids	oz	mL	29.573
Pressure	Tire Pressure	lbf/in <sup>2</sup>	kPa	7.0
Volume	Liquid	gal	liter	3.785
Temperature	General Use	°F	°C	$=(tf - 32)/1.8$
Force	Dynamic Forces	lbf	N	4.448
Moment	Torque	lbf/ft	Nm	1.355

\*Based on the Recommended Practice in SAE J916, May 85

**DATA SHEET NO. 1  
CRASH TEST SUMMARY**

Test Vehicle: 2005 Nissan Frontier  
Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
Test Date: 02/07/2005

**PRIMARY IMPACT DATA**

Measured Parameter	Units	Value
Velocity at Impact	km/hr	56.3
Test Weight	kg	2320.1
Average Rebound	mm	798
Maximum Static Crush	mm	488
Impact Angle	degrees	0.0

**DOOR OPENING AND SEAT TRACK INFORMATION**

Description	Driver	Passenger
Locked/Unlocked Doors	Doors were unlocked	Doors were unlocked
Front Door Opening	Door remained closed and latched; Door opened without tools	Door remained closed and latched; Door opened without tools
Rear Door Opening	Door remained closed and latched; Door opened without tools	Door remained closed and latched; Door opened without tools
Seat Track Shift (mm)	0	0
Seat Back Failure	None	None
Glazing Damage	The windshield cracked	

**TEST DUMMY INFORMATION**

Description	Driver	Passenger
Dummy Type / Serial No.	HIII 50 <sup>th</sup> / 066	HIII 50 <sup>th</sup> / 065
Head Contact	Airbag, Headrest	Airbag, Headrest, Visor
Chest Contact	Airbag	Airbag
Abdomen Contact	Airbag	None
Left Knee Contact	Knee Bolster, Steering Column	Glove Box
Right Knee Contact	Knee Bolster	Glove Box

**16mm MOVIE COVERAGE**

High Speed	16
Real Time	1
Total	17

Driver ATD Sensors	42
Passenger ATD Sensors	46
Belt Assessment Sensors	4
Vehicle Structure Accelerometers	9
Total	101

**DATA SHEET NO. 2**

**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2005 Nissan Frontier  
 Test Program: 35mph Frontal Impact

NHTSA No: M55210  
 Test Date: 02/07/2005

**TEST VEHICLE INFORMATION**

Manufacturer	Nissan Motor Company
Model	Frontier
Body Style	Truck
NHTSA No.	M55210
VIN	1N6AD07W05C406902
Color	Storm Gray
Delivery Date	1/19/05
Odometer Reading (mile)	472
Dealer	Thomas Nissan of Joliet
Transmission	Automatic
Final Drive	4 Wheel
Number of Cylinders	6
Engine Displacement (L)	4.0
Engine Placement	Longitudinal
Automatic Door Lock (ADL)	No
Owners Manual Details Instructions on Disabling ADLs	NA

**TEST VEHICLE OPTIONS**

Driver Airbag	Yes
Passenger Airbag	Yes
Force Limiter	Yes
Pretensioner	Yes
Power Windows	Yes
Power Steering	Yes
Power Door Locks	Yes
Tilt Wheel	Yes
Air Conditioning	Yes
Power Brakes	Yes
Disc Brakes, Front	Yes
Disc Brakes, Rear	Yes
Anti-lock Brakes	Yes
AM/FM/CD	Yes
Anti-theft System	Yes
Cruise Control	Yes

**DATA FROM CERTIFICATION LABEL**

Manufactured By	Nissan Motor Company Ltd.
Date of Manufacture	11/04

GVWR (kg)	2638
GAWR Front (kg)	1495
GAWR Rear (kg)	1481

**DATA FROM TIRE PLACARD**

Measured Parameter	Front	Rear
Maximum Tire Pressure (kPa)	300	300
Cold Pressure	240	240
Recommended Tire Size	P265/70R16, P265/75R16, P235/75R15, P245/75R16, P265/65R17	P265/70R16, P265/75R16, P235/75R15, P245/75R16, P265/65R17
Tire size on Vehicle	P265/70R16	P265/70R16
Tire Manufacturer	General	General

Measured Parameter	Front	Rear	Third	Total
Type of Seats	Bucket	Split Bench		
Number of Occupants	2	3		5
Capacity Wt. (VCW) (kg)				603
Cargo Wt. (RCLW) (kg)				136.1

**DATA SHEET NO. 2... (continued)**

**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2005 Nissan Frontier  
 Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
 Test Date: 02/07/2005

**TEST VEHICLE WEIGHTS**

	Units	As Delivered (UVW) (Axle)			As Tested (ATW) (Axle)		
		Front	Rear	Total	Front	Rear	Total
Left	kg	567.0	449.5		547.0	611.0	
Right	kg	571.5	446.3		549.3	612.8	
Ratio	%	56.0	44.0		47.3	52.7	
Totals	kg	1138.5	895.8	2034.3	1096.3	1223.8	2320.1

**TARGET TEST WEIGHT CALCULATION**

Measured Parameter	Units	Value
Total Delivered Weight (UVW)	kg	2034.3
Weight of 2 P572E ATDs	kg	156.0
Rated Cargo/Luggage Weight (RCLW)	kg	136.1
Calculated Vehicle Target Weight (TVTW)	kg	2326.4

**TEST VEHICLE ATTITUDES AND CG**

	Units	LF	RF	LR	RR	CG(aft of front axle)
As Delivered	mm	877	875	898	900	1409
As Tested	mm	872	868	869	871	1688
Post Test	mm	858	850	862	858	

Vehicle Wheelbase (mm): 3200

Weight of Ballast secured in cargo area (kg): 0

Vehicle Components Removed: None

Ballast weight does not include instrumentation and data acquisition system.

**FUEL SYSTEM DATA**

Fuel System Capacity From Owner's Manual (L): 79.9

Usable Capacity Figure Furnished by COTR (L): 79.9

Actual Test Volume (L): 74.9

Test Fluid Type: Stoddard Solvent; Specific Gravity: 0.77

Is Vehicle Fuel Pump Electric or Mechanical? Electric


If electric, does pump operate with ignition switch "ON" & engine "OFF"? No

**DATA SHEET NO. 3**  
**TEST VEHICLE TIRE INFORMATION**

Test Vehicle: 2005 Nissan Frontier  
Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
Test Date: 02/07/2005

Vehicle Year	2005	Vehicle Make	Nissan
VIN	1N6AD07W05C406902	Vehicle Model	Frontier

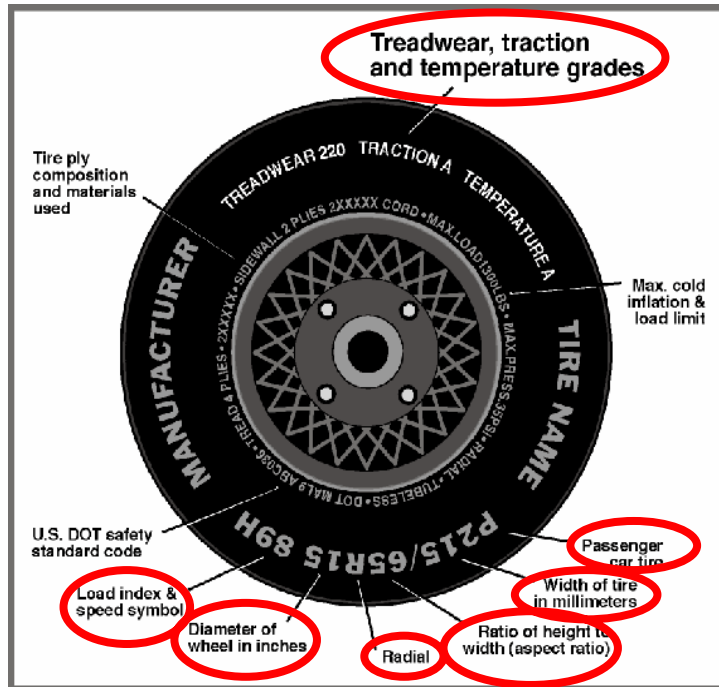

	Front	Rear
Tire Manufacturer	General	General
Tire Name	Grabber AW	Grabber AW
Tire Type	All Season	All Season
Tire Width (mm)	265	265
Ratio of Height to Width (aspect ratio)	70	70
Radial	R	R
Wheel Diameter	16	16
Load Index & Speed Symbol	111S	111S
Treadwear	420	420
Traction Grade	B	B
Temperature Grade	B	B

**DATA SHEET NO. 4  
POST IMPACT DATA**

Test Vehicle: 2005 Nissan Frontier  
 Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
 Test Date: 02/07/2005

Measured Parameter	Units	Requirement	Value
Trap No. 1 Velocity (Primary)	km/h	55.5 – 57.1	56.3
Trap No. 1 Entry Distance	mm	<1524	1300
Trap No. 1 Exit Distance	mm	<1524	300
Trap No. 2 Velocity (Redundant)	km/h	55.5 – 57.1	56.3
Trap No. 2 Entry Distance	mm	<1524	1425
Trap No. 2 Exit Distance	mm	<1524	425

**VEHICLE STATIC CRUSH**

Measured Parameter	Units	Pre-Test	Post-Test	Difference
Left Side	mm	5092	4738	354
Center	mm	5230	4742	488
Right Side	mm	5092	4728	364

**VEHICLE REBOUND FROM BARRIER**

Measured Parameter	Units	Value
Left Side	mm	776
Center	mm	804
Right Side	mm	815
Average	mm	798

**DATA SHEET NO. 5**  
**TEST VEHICLE INFORMATION**

Test Vehicle: 2005 Nissan Frontier  
Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
Test Date: 02/07/2005


**NORMAL DESIGN RIDING POSITION**

The driver and passenger seat back is positioned to the manufacturer's designated angle. The procedure is as follows:

Seat back angle at forward-most locking position or forward stop (measured from upright position) is 9°, and seat back angle at test position (measured from upright position) is 21°

Driver seat back angle: 13.4° on headrest post

Passenger seat back angle: 12.6° on headrest post

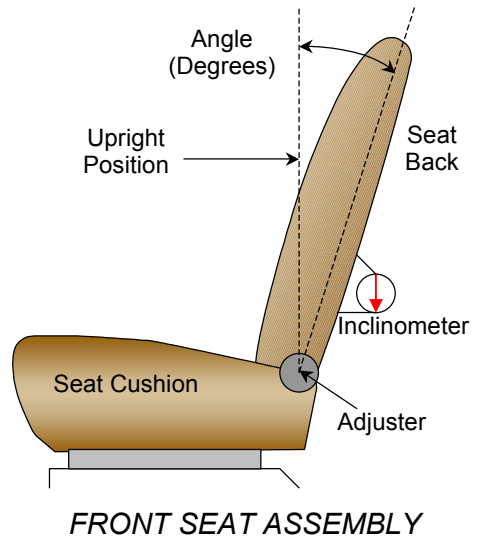

**SEAT FORE/AFT POSITIONS**

The driver and the passenger seats were manually operated.

Driver seat fore/aft total travel: 21 notches

Driver seat fore/aft position: 10 of 21 notches (with the forward-most detent defined as 0)

Passenger seat fore/aft total travel: 21 notches

Passenger seat fore/aft position: 10 of 21 notches (with the forward-most detent defined as 0)

**DATA SHEET NO. 5... (continued)**

**TEST VEHICLE INFORMATION**


Test Vehicle: 2005 Nissan Frontier  
Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
Test Date: 02/07/2005

**FUEL TANK CAPACITY DATA**

The "Usable Capacity" of the standard equipment fuel tank is: 79.9 liters  
The "Usable Capacity" of any optional equipment fuel tank is: N/A liters  
The "Usable Capacity" used for certification to FMVSS 301 requirements: 79.9 liters  
Actual amount of Stoddard solvent added to vehicle for certification test: 74.9 liters

The fuel door is located on the left (driver's) side of the vehicle.

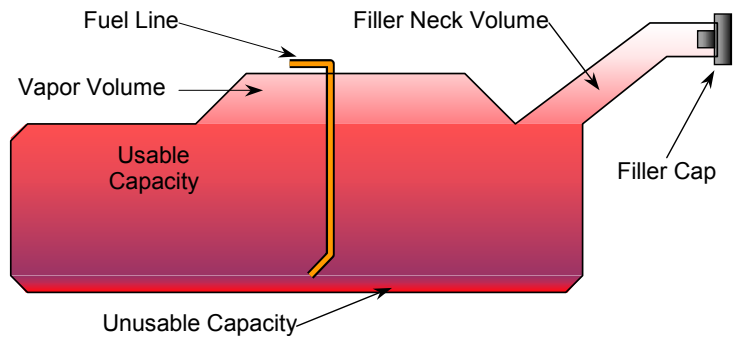


*VEHICLE FUEL TANK ASSEMBLY*

**STEERING COLUMN ADJUSTMENT**

Adjustable steering controls are made so that the steering wheel hub is at the geometric center of the locus it describes when it is moved through its full range of driving positions.

Lowermost, Position 1: 16.0°  
Geometric Center, Position 2: 25.2°  
Uppermost, Position 3: 34.0°

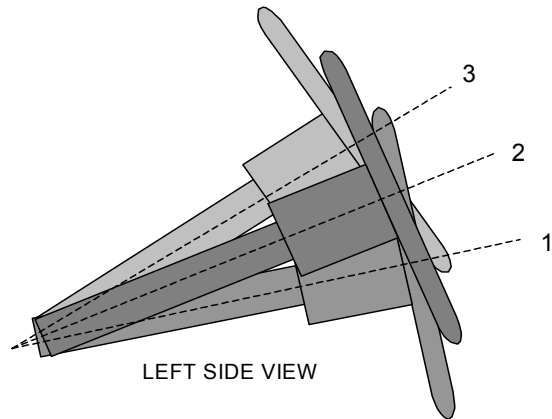

*STEERING COLUMN ASSEMBLY*


# DATA SHEET NO. 6

## DUMMY POSITIONING IN VEHICLE

Test Vehicle: 2005 Nissan Frontier  
 Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
 Test Date: 02/07/2005

### DUMMY MEASUREMENTS FOR FRONT SEAT OCCUPANTS

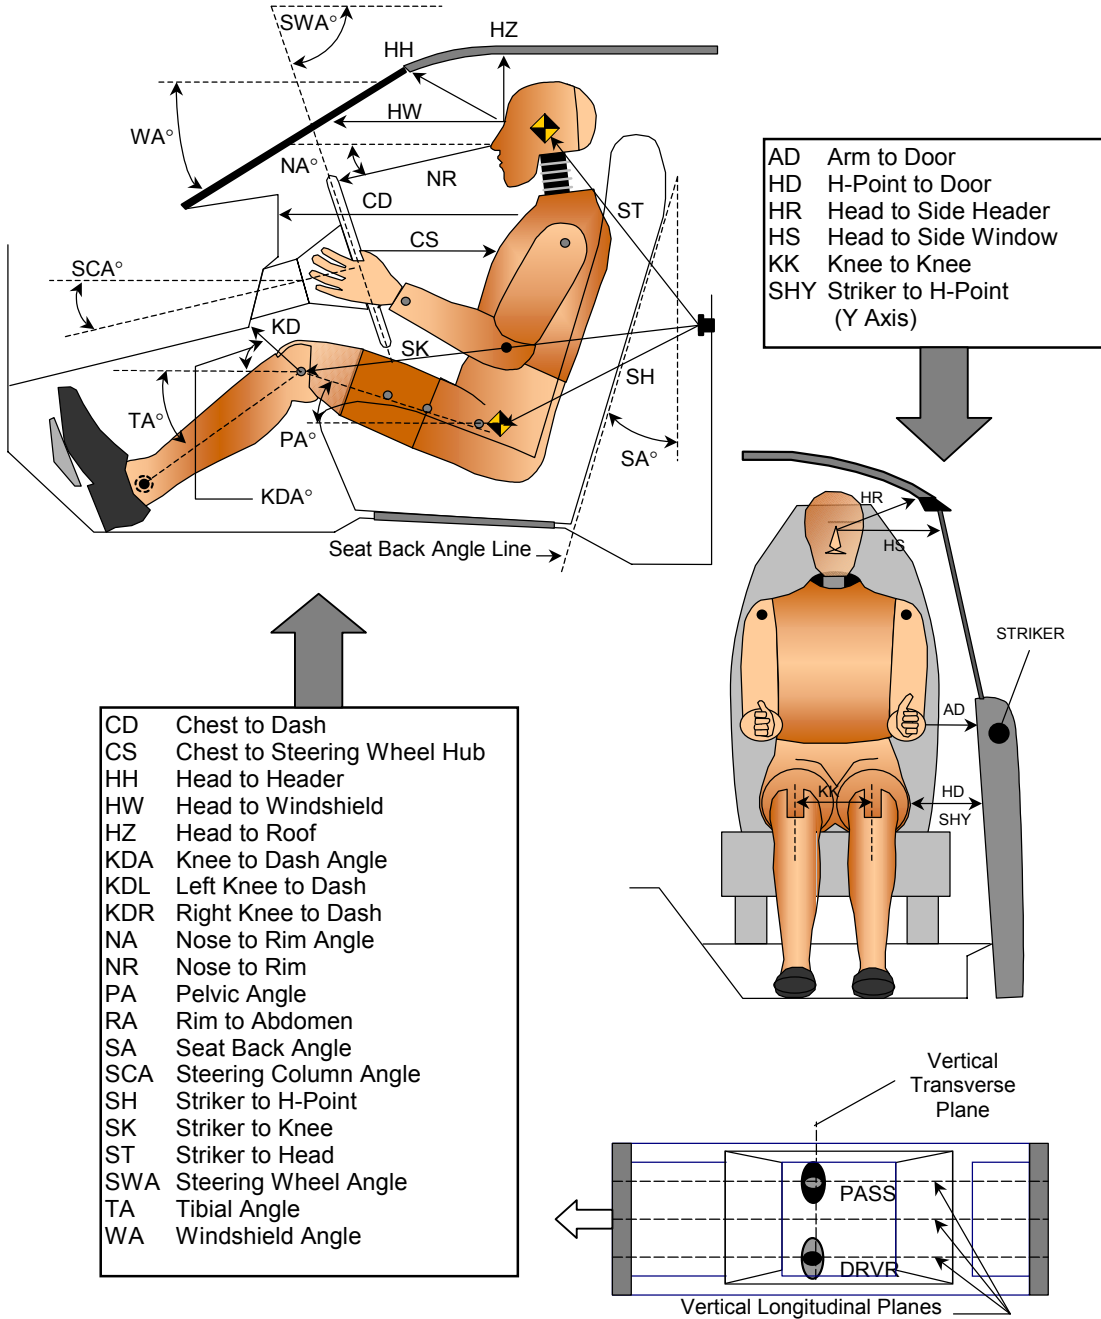

**DATA SHEET NO. 6... (continued)**  
**DUMMY POSITIONING IN VEHICLE**

Test Vehicle: 2005 Nissan Frontier  
 Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
 Test Date: 02/07/2005


**TEST DUMMY POSITION MEASUREMENTS**

Code	Measurement Description	Driver		Passenger	
		Length (mm)	Angle (°)	Length (mm)	Angle (°)
WA	Windshield Angle		33.5		
SWA	Steering Wheel Angle		65.3		
SCA	Steering Column Angle		22.7		
SA	Seat Back Angle (headrest post)		13.4		12.6
HZ	Head to Roof (Z)	161	90.0	150	90.0
HH	Head to Header	371	18.6	378	20.0
HW	Head to Windshield	587	0.0	578	0.0
HR	Head to Side Header (Y)	195		184	
NR	Nose to Rim	402	13.3		
CD	Chest to Dash	547		531	
CS	Chest to Steering Hub	309	17.9		
RA	Rim to Abdomen	179	0.0		
KDL	Left Knee to Dash	137	14.1	120	
KDR	Right Knee to Dash	116		125	23.8
PA	Pelvic Angle		23.1		20.8
TA	Tibia Angle		51.6		42.8
KK	Knee to Knee (Y)	316		270	
SK	Striker to Knee	618	93.8	647	90.8
ST	Striker to Head	587	9.7	647	11.2
SH	Striker to H-Point	242	105.3	242	102.1
SHY	Striker to H-Point (Y)	237		227	
HS	Head to Side Window	303		303	
HD	H-Point to Door (Y)	173		159	
AD	Arm to Door (Y)	104		98	
AA	Ankle to Ankle	323		224	

**DATA SHEET NO. 7**  
**SEAT BELT POSITIONING DATA**

Test Vehicle: 2005 Nissan Frontier  
Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
Test Date: 02/07/2005

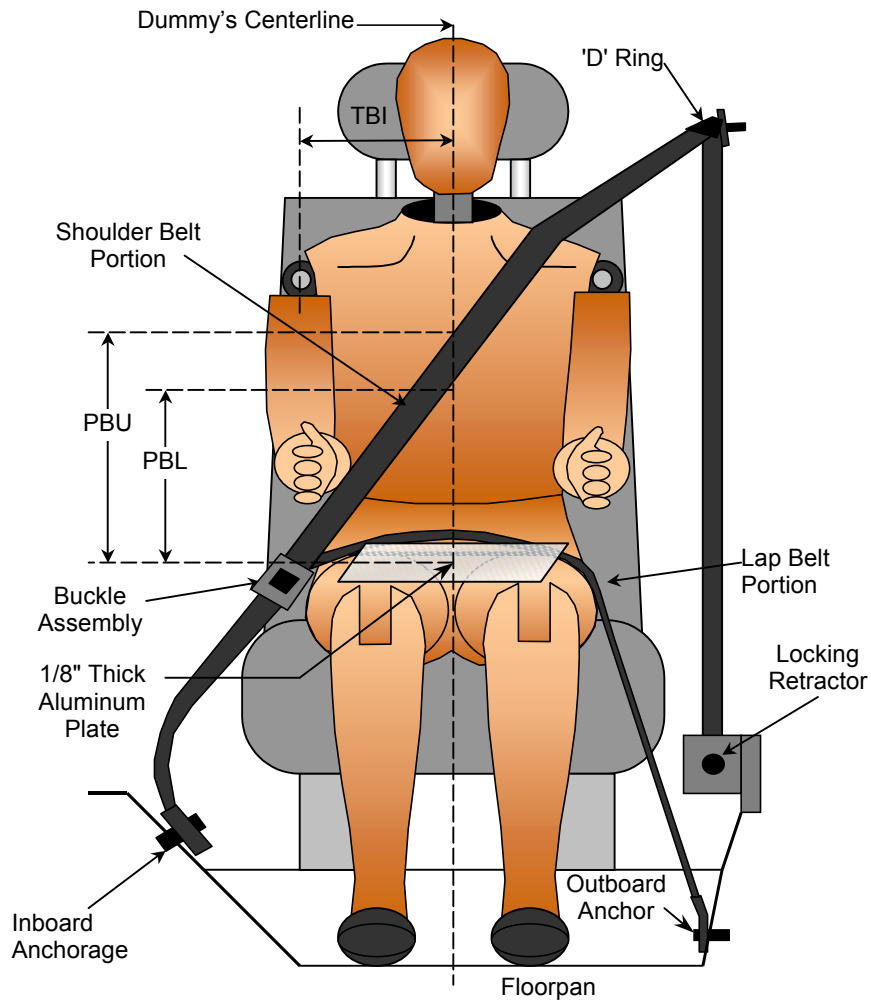

**SEAT BELT POSITIONING MEASUREMENTS**

Measurement Description	Units	Driver	Passenger
TBI - Dummy centerline to shoulder bolt	mm	170	170
PBU - Top surface of reference to belt upper edge	mm	339	373
PBL - To surface of reference to belt lower edge	mm	265	295

**DATA SHEET NO. 8**

**VEHICLE ACCELEROMETER LOCATION AND DATA SUMMARY**



Test Vehicle: 2005 Nissan Frontier  
 Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
 Test Date: 02/07/2005

**VEHICLE ACCELEROMETER PEAK DATA AND PRE-TEST LOCATIONS**

No.	Accelerometer Location	Measurements (mm)			Peak Values				
		X	Y	Z	Units	Max	Time	Min	Time
1	Left Rear X-Member X	3334	-621	560	G's	4.1	100	-41.3	47
2	Right Rear X-Member X	3334	621	560	G's	3.2	98	-44.8	44
3	Engine Top X	4264	0	1070	G's	14.3	57	-73.7	28
4	Engine Bottom X	4294	0	258	G's	12.6	57	-70.8	41
5	Left Brake Caliper X	4294	-695	280	G's	88.2	55	-112.9	37
6	Right Brake Caliper X	4294	695	280	G's	59.8	56	-121.4	44
7	Instrument Panel X	3752	13	1290	G's	30.7	29	-93.8	33
8	Left Rear X-Member Z	3334	-621	560	G's	11.6	40	-8.3	57
9	Right Rear X-Member Z	3334	621	560	G's	15.7	47	-7.7	33

Reference Points: X - Rear Surface of Vehicle (+ forward)  
 Y - Vehicle Centerline (+ to right)  
 Z - Ground Plane (+ up)

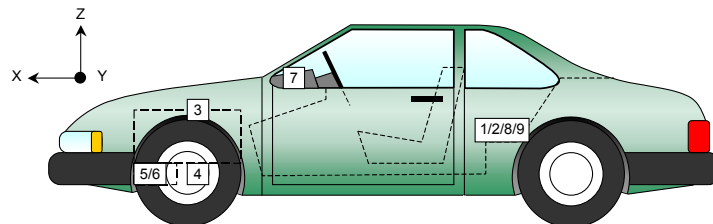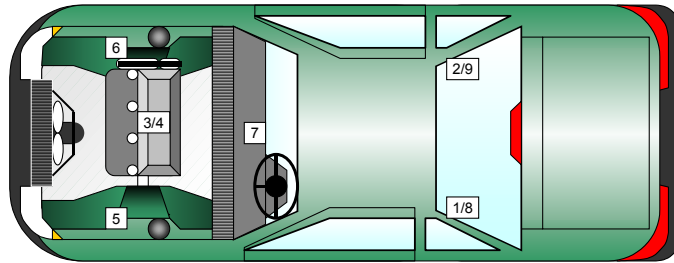

**DATA SHEET NO. 9**

**HYBRID III ATD INJURY CRITERIA AND SENSOR DATA**

Test Vehicle: 2005 Nissan Frontier  
 Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
 Test Date: 02/07/2005

**HEAD PRIMARY PEAK ACCELERATIONS**

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Head CG	X	G's	17.8	229	-64.7	71	34.9	206	-66.5	76
Head CG	Y	G's	2.9	29	-20.8	79	9.0	207	-14.5	77
Head CG	Z	G's	27.8	57	-2.8	93	26.0	61	-6.9	96
Head CG Resultant	N/A	G's	67.9	71			71.2	74		

**CHEST PRIMARY PEAK ACCELERATIONS**

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Chest CG	X	G's	3.3	261	-49.1	73	2.9	165	-53.1	69
Chest CG	Y	G's	4.7	95	-5.2	50	3.7	48	-10.6	96
Chest CG	Z	G's	13.8	52	-11.2	95	16.6	77	-8.0	112
Chest CG Resultant	N/A	G's	49.3	73			53.4	71		

**FEMUR PEAK FORCES**

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Left Femur	Z	Newtons	308	35	-5039	44	220	23	-3611	51
Right Femur	Z	Newtons	491	60	-3620	46	216	28	-2861	51

**SEAT BELT SENSOR PEAK VALUES**

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Lap Belt Force	N/A	Newtons	8582	51			8119	51		
Shoulder Belt Force	N/A	Newtons	6778	75			6467	47		

**HEAD INJURY CRITERIA (HIC)**

Location	Driver				Passenger			
	HIC	Avg. G's	T <sup>1</sup>	T <sup>2</sup>	HIC	Avg. G's	T <sup>1</sup>	T <sup>2</sup>
Head CG Primary	636.1	51.0	52.6	86.9	575.4	48.0	58.0	94.0

**CHEST CLIP (3MSEC)**

Location	Driver			Passenger		
	CLIP	T <sup>1</sup>	T <sup>2</sup>	CLIP	T <sup>1</sup>	T <sup>2</sup>
Chest CG Primary	48.2	71.2	74.2	51.6	68.5	71.5

**DATA SHEET NO. 9**

**HYBRID III ATD INJURY CRITERIA AND SENSOR DATA**

Test Vehicle: 2005 Nissan Frontier  
 Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
 Test Date: 02/07/2005

**HEAD PRIMARY PEAK ACCELERATIONS**

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Head CG	X	G's	17.8	229	-64.7	71	34.9	206	-66.5	76
Head CG	Y	G's	2.9	29	-20.8	79	9.0	207	-14.5	77
Head CG	Z	G's	27.8	57	-2.8	93	26.0	61	-6.9	96
Head CG Resultant	N/A	G's	67.9	71			71.2	74		

**CHEST PRIMARY PEAK ACCELERATIONS**

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Chest CG	X	G's	3.3	261	-49.1	73	2.9	165	-53.1	69
Chest CG	Y	G's	4.7	95	-5.2	50	3.7	48	-10.6	96
Chest CG	Z	G's	13.8	52	-11.2	95	16.6	77	-8.0	112
Chest CG Resultant	N/A	G's	49.3	73			53.4	71		

**FEMUR PEAK FORCES**

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Left Femur	Z	Newtons	308	35	-5039	44	220	23	-3611	51
Right Femur	Z	Newtons	491	60	-3620	46	216	28	-2861	51

**SEAT BELT SENSOR PEAK VALUES**

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Lap Belt Force	N/A	Newtons	8582	51			8119	51		
Shoulder Belt Force	N/A	Newtons	6778	75			6467	47		

**HEAD INJURY CRITERIA (HIC)**

Location	Driver				Passenger			
	HIC	Avg. G's	T <sup>1</sup>	T <sup>2</sup>	HIC	Avg. G's	T <sup>1</sup>	T <sup>2</sup>
Head CG Primary	636.1	51.0	52.6	86.9	575.4	48.0	58.0	94.0

**CHEST CLIP (3MSEC)**

Location	Driver			Passenger		
	CLIP	T <sup>1</sup>	T <sup>2</sup>	CLIP	T <sup>1</sup>	T <sup>2</sup>
Chest CG Primary	48.2	71.2	74.2	51.6	68.5	71.5

**DATA SHEET NO. 9... (continued)**

**HYBRID III ATD INJURY CRITERIA AND SENSOR DATA**

Test Vehicle: 2005 Nissan Frontier  
 Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
 Test Date: 02/07/2005

**PELVIC PEAK ACCELERATIONS**

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Pelvis	X	G's	3.9	94	-73.4	44	7.7	119	-75.0	51
Pelvis	Y	G's	7.6	79	-6.5	48	11.2	52	-11.2	72
Pelvis	Z	G's	2.9	37	-20.3	58	6.8	35	-23.5	69

**UPPER NECK PEAK FORCES AND MOMENTS**

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Neck Force	X	Newtons	440	72	-551	129	89	266	-712	75
Neck Force	Y	Newtons	171	61	-206	100	157	238	-248	143
Neck Force	Z	Newtons	2469	59	-308	267	1864	75	-351	23
Neck Moment	X	N•m	6.9	52	-20.9	76	27.7	76	-13.2	136
Neck Moment	Y	N•m	47.1	124	-22.5	51	33.6	153	-55.5	75
Neck Moment	Z	N•m	19.6	92	-11.8	140	21.4	84	-14.5	153

**FOOT PEAK ACCELERATIONS**

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Left Foot Aft	X	G's	8.1	83	-74.8	44	15.8	77	-99.8	38
Left Foot Aft	Z	G's	2.0	279	-45.0	43	17.0	64	-75.3	43
Left Foot Fore	Z	G's	10.8	105	-64.5	43	20.9	49	-108.5	40
Right Foot Aft	X	G's	26.8	93	-186.9	43	11.3	75	-87.6	38
Right Foot Aft	Z	G's	19.0	58	-167.0	42	4.7	62	-49.9	41
Right Foot Fore	Z	G's	56.1	59	-234.4	42	9.1	128	-91.7	41

**UPPER AND LOWER TIBIA PEAK FORCES AND MOMENTS**

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Left Lower Moment	X	N•m	6.8	44	-7.3	57	23	50	-49.7	44
Left Lower Moment	Y	N•m	15.9	26	-63.7	45	108.7	43	-20.9	30
Left Lower Force	Z	Newtons	118	54	-1537	42	282	127	-3522	52
Left Upper Moment	X	N•m	26.2	86	-38.9	43	28.1	46	-75.9	49
Left Upper Moment	Y	N•m	256.7	44	-50.4	28	15.2	34	-67.7	43
Left Upper Force	Z	Newtons	171	133	-1176	37	136	127	-3796	49
Right Lower Moment	X	N•m	140.5	47	-38.6	43	21.6	52	-13.2	83
Right Lower Moment	Y	N•m	28.7	41	-166.5	48	4.9	135	-47.4	45
Right Lower Force	Z	Newtons	69	124	-7397	46	181	137	-2911	40
Right Upper Moment	X	N•m	97.6	44	-23.6	76	8.6	99	-72.7	52
Right Upper Moment	Y	N•m	175.0	43	-19.4	70	121.3	43	-20.4	28
Right Upper Force	Z	Newtons	164	172	-6388	46	185	13	-2657	51

**DATA SHEET NO. 9... (continued)**  
**HYBRID III ATD INJURY CRITERIA AND SENSOR DATA**

Test Vehicle: 2005 Nissan Frontier  
 Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
 Test Date: 02/07/2005

**CHEST PEAK DISPLACEMENTS**

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Chest	X	mm			-29.9	80			-28.7	79

**HEAD REDUNDANT PEAK ACCELERATIONS**

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Head CG	X	G's	17.6	229	-62.9	71	35.3	206	-65.5	75
Head CG	Y	G's	3.0	33	-20.7	79	*	*	*	*
Head CG	Z	G's	27.5	49	-3.8	93	27.8	74	-7.0	96
Head CG Resultant	N/A	G's	65.9	71			70.6	74		

\* No valid data collected

**CHEST REDUNDANT PEAK ACCELERATIONS**

Location	Axis	Units	Driver				Passenger			
			Max	Time	Min	Time	Max	Time	Min	Time
Chest CG	X	G's	3.2	261	-48.7	72	3.7	147	-51.3	70
Chest CG	Y	G's	4.4	87	-5.6	41	2.4	26	-7.5	72
Chest CG	Z	G's	14.4	52	-11.8	94	15.9	77	-8.0	110
Chest CG Resultant	N/A	G's	49.0	72			51.5	70		

**REDUNDANT HEAD INJURY CRITERIA (HIC)**

Location	Driver				Passenger			
	HIC	Avg.	T <sup>1</sup>	T <sup>2</sup>	HIC	Avg.	T <sup>1</sup>	T <sup>2</sup>
Head CG Primary Redundant	588.7	49.4	52.6	86.9	**	**	**	**

\*\* No valid data collected for Passenger Head Y Redundant

**REDUNDANT CHEST CLIP (3MSEC)**

Location	Driver			Passenger		
	CLIP	T <sup>1</sup>	T <sup>2</sup>	CLIP	T <sup>1</sup>	T <sup>2</sup>
Chest CG Primary Redundant	47.8	71.2	74.2	48.0	68.3	71.3

**DATA SHEET NO. 10****SEAT BELT PERFORMANCE ASSESSMENT TEST DATA**

Test Vehicle: 2005 Nissan Frontier  
 Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
 Test Date: 02/07/2005

**SEAT BELT PLACEMENT MEASUREMENTS**

Measurement Description	Units	Driver	Passenger
TBI - Dummy centerline to shoulder bolt	mm	170	170
PBU - Top surface of reference to belt upper edge	mm	339	373
PBL - Top surface of reference to belt lower edge	mm	265	295

**BELT LENGTH DATA**

Measurement Description	Units	Driver	Passenger
Shoulder belt length as measured on ATD	mm	844	834
Lap belt length as measured on ATD	mm	791	798
Remainder of belt on reel	mm	1670	1686
Total belt length for continuous webbing systems	mm	3305	3318

**SHOULDER BELT SPOOL-OUT DATA**

Measurement Description	Units	Driver	Passenger
As determined mechanically	mm	Not recorded	
As determined electronically	mm	Not recorded	

**DATA SHEET NO. 11**  
**SUMMARY OF FMVSS 212 DATA**

Test Vehicle: 2005 Nissan Frontier  
 Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
 Test Date: 02/07/2005

**Windshield Mounting Details:**


Windshield glass is secured to the vehicle frame with a rubber trim and glue.

The standard requires that the post-test retention measurement be a minimum of 75 percent of the pretest total periphery measurement for vehicles not equipped with occupant passive restraints and 50 percent for each side of the windshield for vehicles, which are equipped with occupant passive restraints.

Temperature of windshield molding during test: 21°C

**WINDSHIELD PERIPHERY MEASUREMENTS**

Measurement	Pre-Test (mm)	Post-Test (mm)	% of Retention
Left Side	2114	2114	100
Right Side	2114	2114	100
Total	4228	4228	100

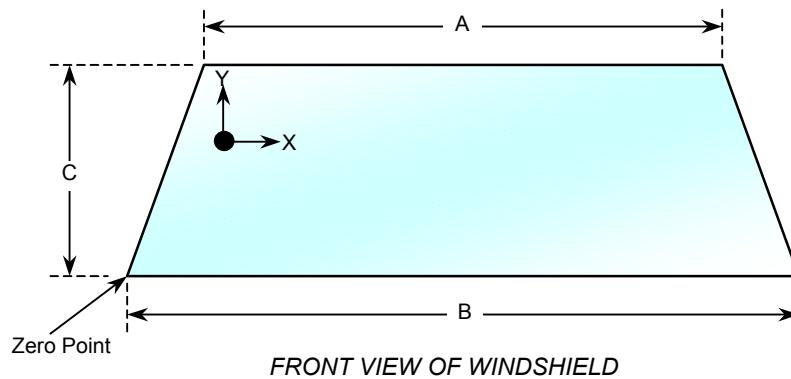

**WINDSHIELD DIMENSIONS**


Item	Units	Segment Length	Molding Width
A	mm	1172	14
B	mm	1526	N/A
C	mm	765	11

**DATA SHEET NO. 12**

**WINDSHIELD ZONE INTRUSION FMVSS 219 (Partial) DATA**

Test Vehicle: 2005 Nissan Frontier  
 Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
 Test Date: 02/07/2005

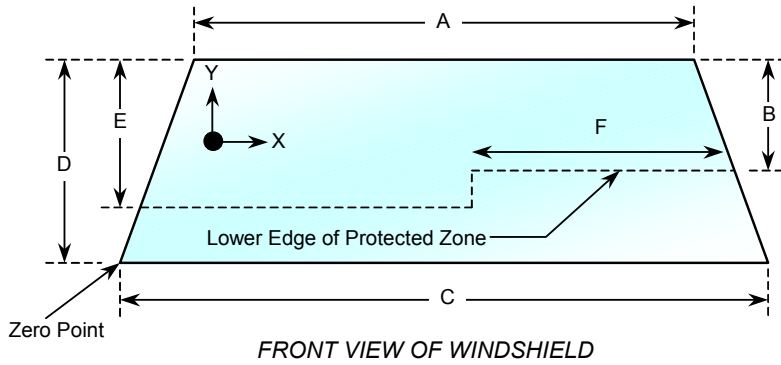

Item	Units	Value
A	mm	1172
B	mm	472
C	mm	1526
D	mm	765
E	mm	480
F	mm	468

**AREA OF PROTECTED ZONE FAILURES - NONE**

- A. Provide coordinates of the area that the protected zone was penetrated more than 0.25 inches by a vehicle component other than one that is normally in contact with the windshield. **None**

X	Y

- B. Provide coordinates of the area beneath the protected zone that the inner surface of the windshield was penetrated by a vehicle component. **None**

X	Y

**DATA SHEET NO. 13**

**FMVSS 301 FUEL SYSTEM INTEGRITY POST IMPACT DATA**

Test Vehicle: 2005 Nissan Frontier  
Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
Test Date: 02/07/2005

Temperature at Time of Impact: 21° C      Test Time: 11:53 am

**Stoddard Solvent Spillage Measurements**


- A. From impact until vehicle motion ceases: 0 oz.  
(Maximum Allowable = 1 ounce)
- B. For the 5 minute period after motion ceases: 0 oz.  
(Maximum Allowable = 5 ounces)
- C. For the following 25 minutes: 0 oz.  
(Maximum Allowable = 1 oz. /minute)
- D. Spillage: None

**DATA SHEET NO. 14**  
**FMVSS 301 STATIC ROLLOVER DATA**

Test Vehicle: 2005 Nissan Frontier  
 Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
 Test Date: 02/07/2005

Test Time: 11:53 am

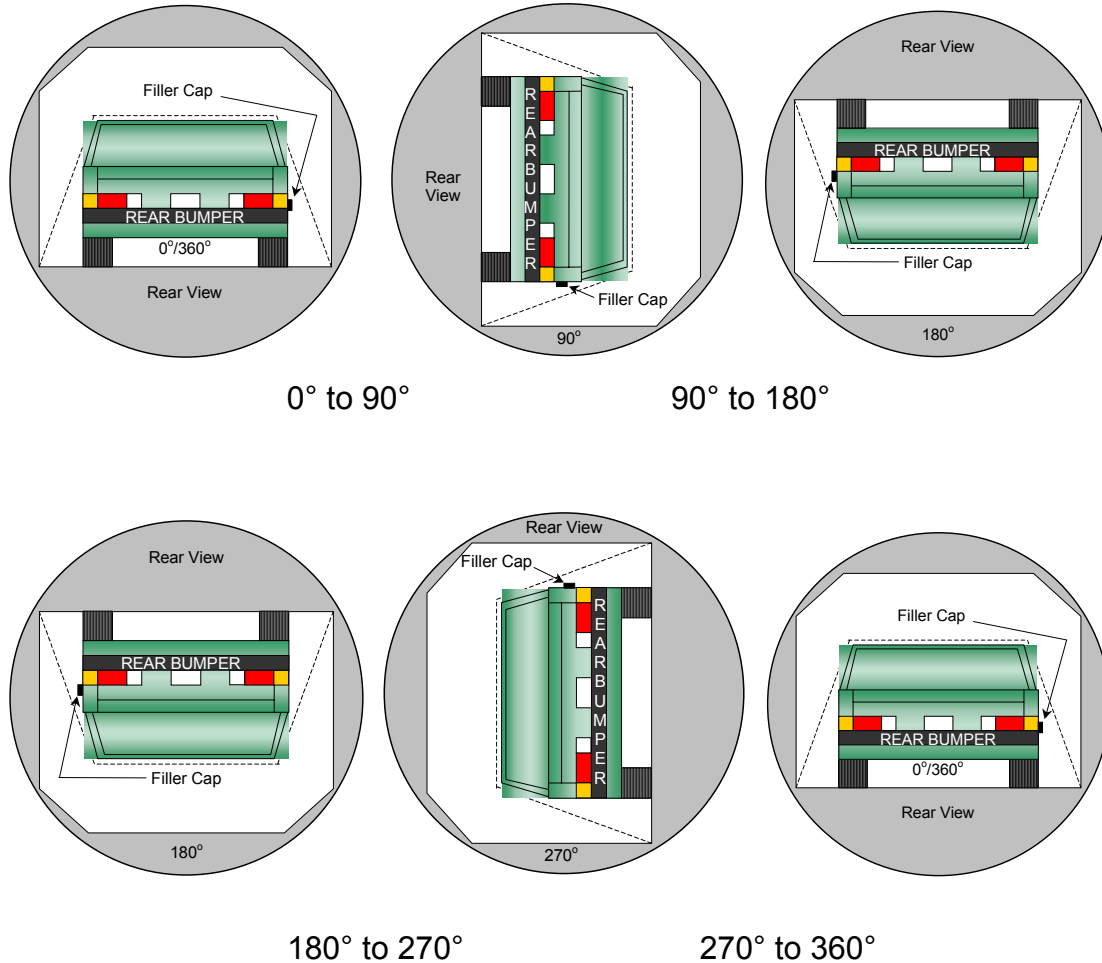

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.
2. The position hold time at each position is 300 seconds (minimum).
3. Details of Stoddard Solvent spillage locations: None

Test Phase	Rotation Time (sec.)	Hold Time (sec.)	Spillage (oz.)
0° to 90°	161	300	0
90° to 180°	151	300	0
180° to 270°	135	300	0
270° to 360°	157	300	0

**DATA SHEET NO. 15**  
**VEHICLE MEASUREMENTS**

Test Vehicle: 2005 Nissan Frontier  
Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
Test Date: 02/07/2005

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
1	Total length of vehicle at centerline	mm	5230	4742	488
2	RSOV to front of engine	mm	4521	4428	93
3	RSOV to firewall centerline	mm	4117	4142	-25
4	RSOV to leading edge of right door	mm	3812	3849	-37
5	RSOV to leading edge of left door	mm	3814	3824	-10
6	RSOV to lower leading edge of right door	mm	3710	3737	-27
7	RSOV to lower leading edge of left door	mm	3706	3706	0
8	RSOV to upper leading edge of right door	mm	2707	2741	-34
9	RSOV to upper leading edge of left door	mm	2707	2720	-13
10	RSOV to lower trailing edge of right door	mm	2668	2696	-28
11	RSOV to lower trailing edge of left door	mm	2660	2664	-4
12	RSOV to bottom of right 'A' pillar	mm	3690	3737	-47
13	RSOV to bottom of left 'A' pillar	mm	3690	3686	4
14	RSOV to firewall on right side	mm	4176	4187	-11
15	RSOV to firewall on left side	mm	4175	4164	11
16	RSOV to steering column	mm	3307	3351	-44
17	Center of steering column to left 'A' pillar	mm	365	321	44
18	Center of steering column to headlining	mm	436	397	39
19	RSOV to right side of front bumper	mm	5092	4728	364
20	RSOV to left side of front bumper	mm	5092	4738	354
21	Length of engine block	mm	375	375	0
RD	RSOV to right side of dash panel	mm	3577	3613	-36
CD	RSOV to center of dash panel	mm	3546	3560	-14
LD	RSOV to left side of dash panel	mm	3564	3604	-40


Note: Cab Shifted Forward Post Test

DATA SHEET NO. 15... (continued)

VEHICLE MEASUREMENTS

Test Vehicle: 2005 Nissan Frontier  
Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
Test Date: 02/07/2005

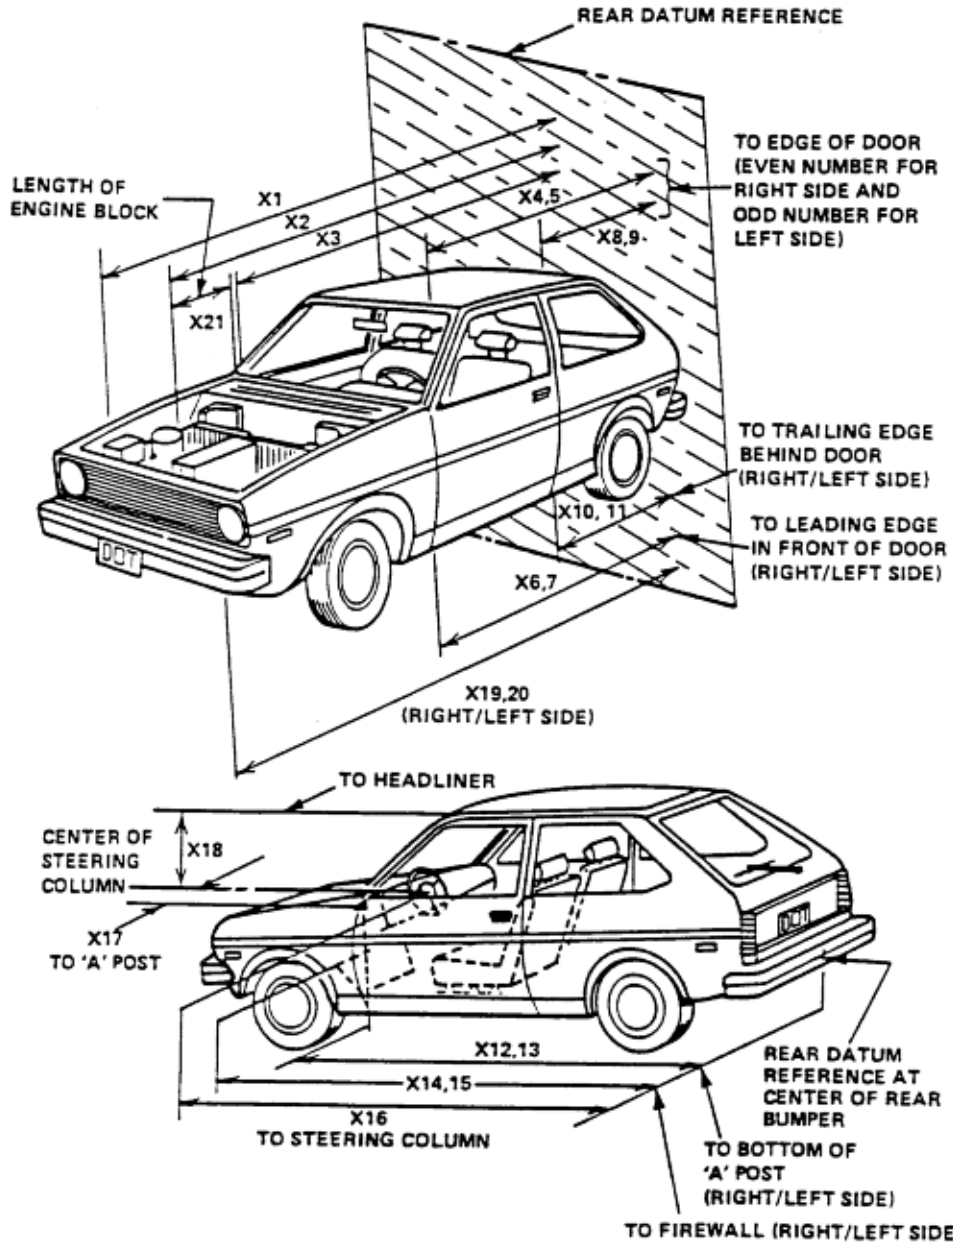

**DATA SHEET NO. 15... (continued)****VEHICLE MEASUREMENTS**

Test Vehicle: 2005 Nissan Frontier  
Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
Test Date: 02/07/2005

**Target Vehicle Structural Measurement**

	Elements	Pre-Test (mm)
1	Total Length	5230
2	Total Width	1780
3	Bumper Top Height	700
4	Bumper Bottom Height	334
5	Longitudinal Member Top Height	556
6	Distance between Longitudinal Members	856
7	Longitudinal Member Width	65
8	Engine Top Height	1140
9	Engine Bottom Height	250
10	Engine and gearbox width	565
11	Front bumper-engine distance	570
12	Front shock absorber fixing height	735
13	Bonnet leading edge height	1025
14	Front shock absorber fixing width	896
15	Front bumper – front axle distance	790
16	Front axle – a pillar distance	720
17	A-pillar – B-pillar distance	1040
18	B-Pillar – rear axle distance	1444
19	B-pillar – C-pillar distance	750
20	Roof sill bottom height	1705
21	Roof sill top height	1750
22	Floor sill bottom height	365
23	Floor sill top height	465

**DATA SHEET NO. 16**  
**CAMERA LOCATIONS**

Test Vehicle: 2005 Nissan Frontier  
Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
Test Date: 02/07/2005

No.	Camera View	Location (mm) *			Lens (mm)	Speed (fps)
		X	Y	Z		
1	Real-Time Left Side View				13	**
2	Left Front View	1435	-9365	1470	24	1000
3	Steering Column Top	2060	-6820	1565	19	1000
4	Steering Column Bottom	2020	-6800	1030	24	1000
5	Driver Close-up	1765	-8770	1470	50	1000
6	Driver Angle	6325	-4685	2140	50	1000
7	On board Driver Side				8	500
8	On board Passenger Side				8	500
9	Right Overall	2495	7920	1465	19	1000
10	Right Passenger Half	1340	9965	1370	25	1000
11	Right Close-up	1690	9300	1380	50	1000
12	Right Angle	6325	5045	2190	50	1000
13	Windshield	-505	0	2800	14	1000
14	Top Driver	-70	-480	2020	13	1000
15	Top Passenger	-40	610	2030	13	1000
16	Pit Front	1080	0	-3150	19	1000
17	Pit Rear	2480	0	-3150	19	1000

\*COORDINATES:

+X = forward of impact plane  
+Y = right of monorail centerline  
+Z = above ground level

\*\* Camera did not run.


DATA SHEET NO. 16... (continued)

CAMERA LOCATIONS

Test Vehicle: 2005 Nissan Frontier  
Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
Test Date: 02/07/2005

CAMERA POSITIONS FOR FRONTAL IMPACTS

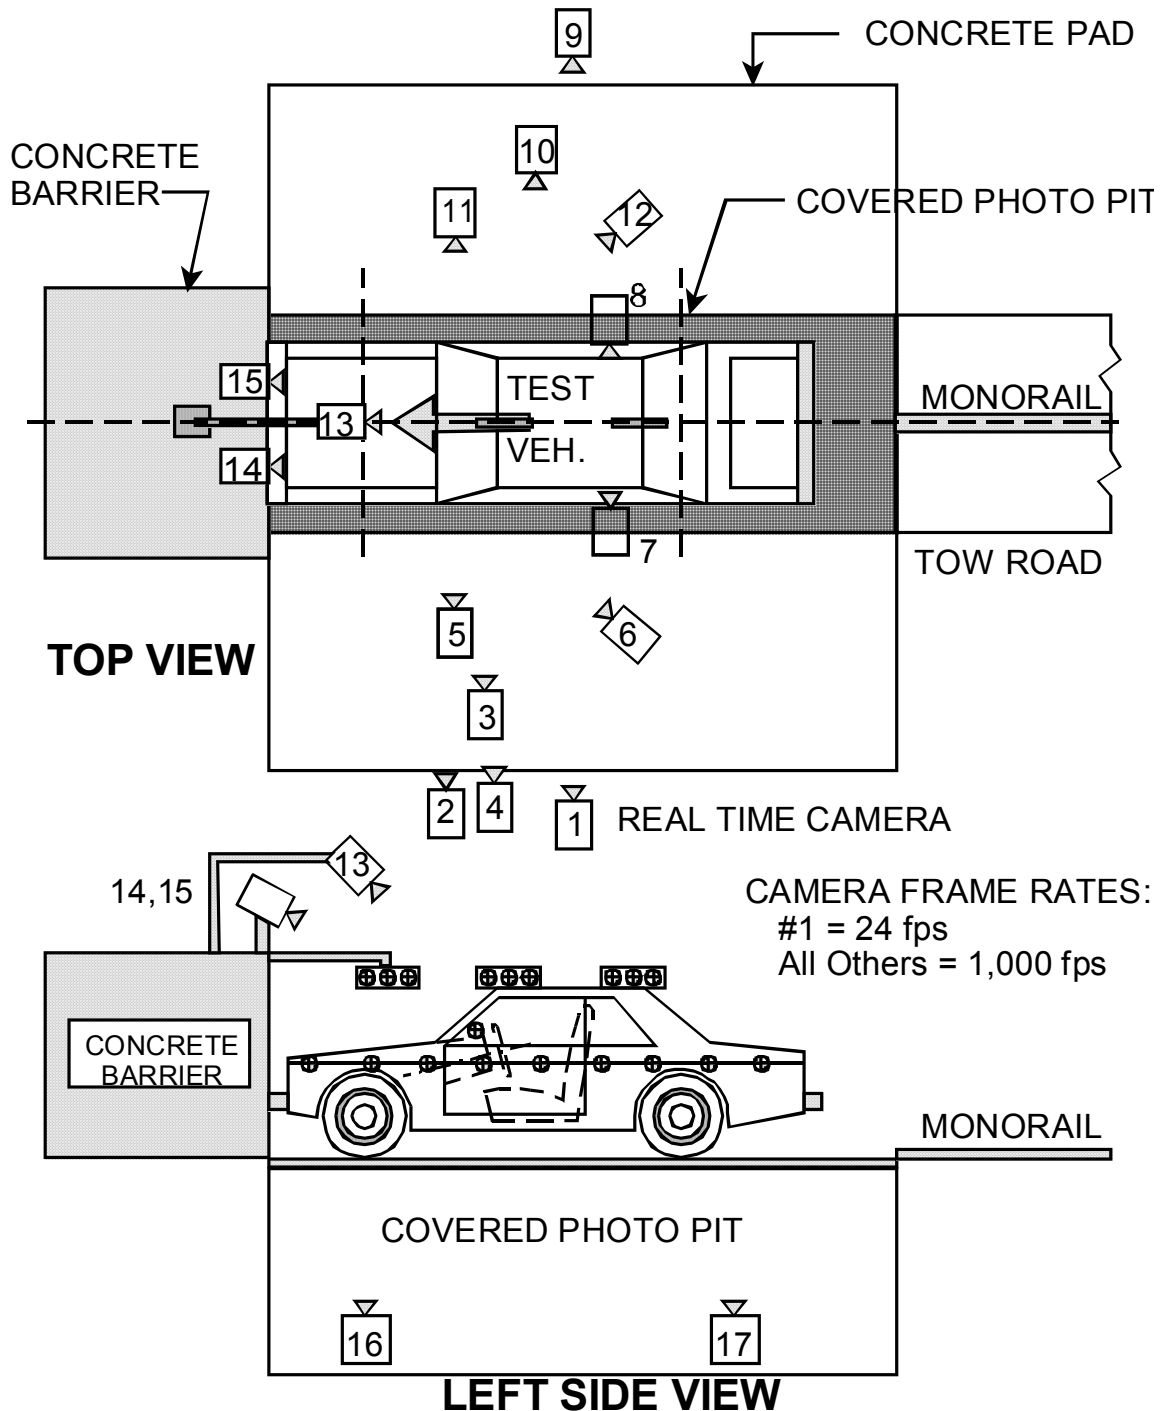




## DATA SHEET NO. 17

### PHOTOGRAPHIC REFERENCE TARGET LOCATIONS

Test Vehicle: 2005 Nissan Frontier  
 Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
 Test Date: 02/07/2005

Item	Value
A	404
B	890
C	2344
D	604
E	2282
F	1754
G	
H	1805
I	1493
J	902
K	901
L	1934
M	1811
N	1950
O	898
P	898
Q	1484

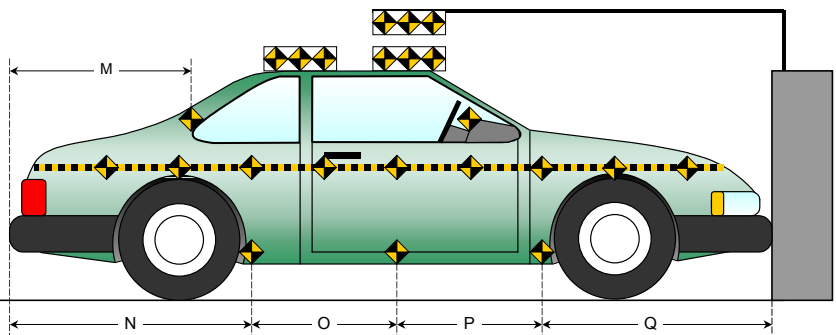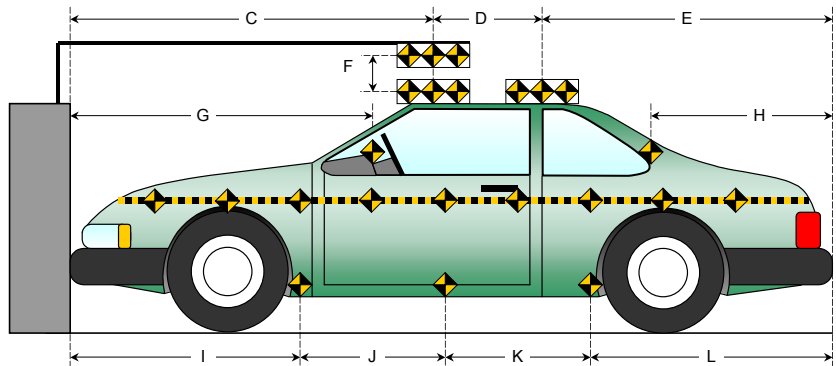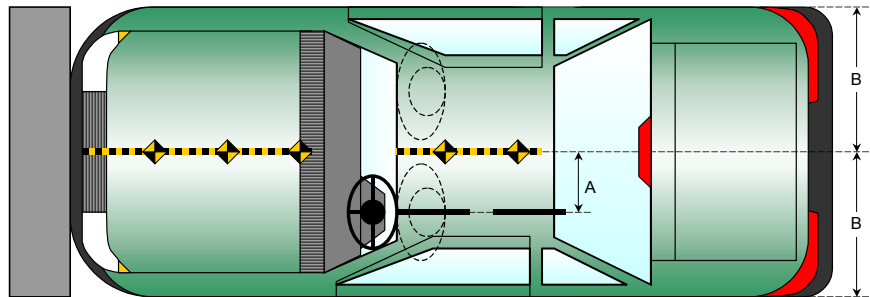

**DATA SHEET NO. 18**  
**VEHICLE INTRUSION MEASUREMENTS**

Test Vehicle: 2005 Nissan Frontier  
 Test Program: 35mph Frontal Impact


NHTSA No.: M55210  
 Test Date: 02/07/2005

**DOOR OPENING WIDTH**

Item	Description	Units	Pre-Test	Post-Test	Difference
A	Left Side Upper	mm	1024	1023	1
B	Left Side Lower	mm	937	936	1
D	Right Side Upper	mm	993	992	1
E	Right Side Lower	mm	936	936	0

**WHEELBASE MEASUREMENTS**

Item	Description	Units	Pre-Test	Post-Test	Difference
C	Left Side Wheelbase	mm	3200	3093	107
F	Right Side Wheelbase	mm	3201	3143	58

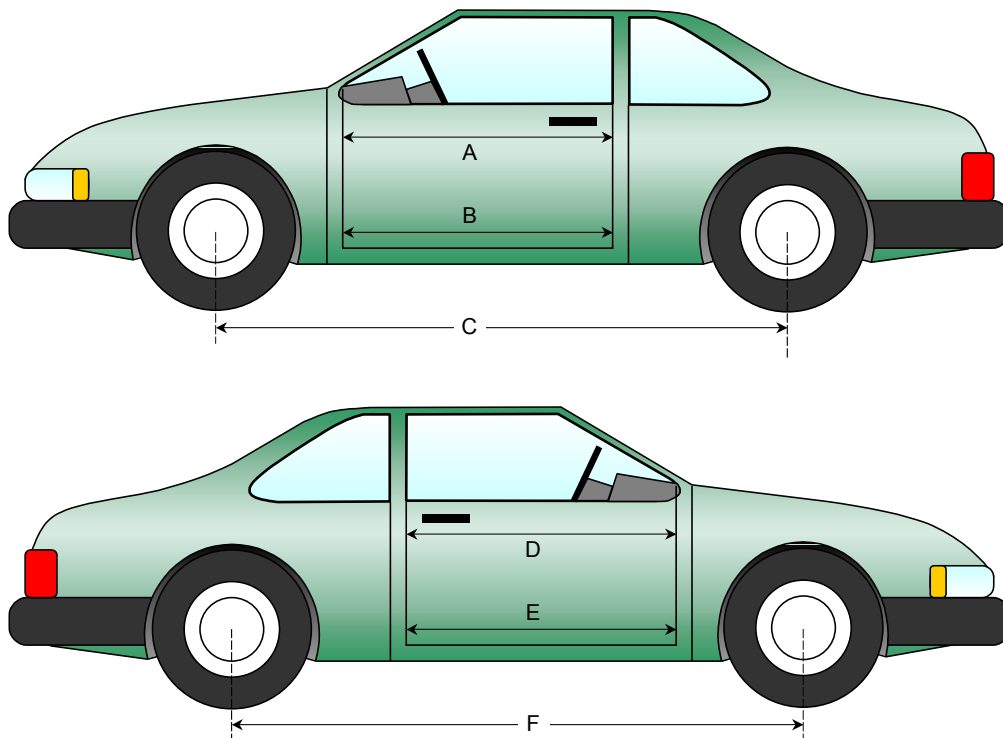

**DATA SHEET NO. 18... (continued)**  
**VEHICLE INTRUSION MEASUREMENTS**


Test Vehicle: 2005 Nissan Frontier  
 Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
 Test Date: 02/07/2005

**DRIVER COMPARTMENT INTRUSION**

Item	Description	Units	Pre-Test	Post-Test	Difference
AB	Door Opening (Inside window jam)	mm	974	979	-5
CX	Left Knee Bolster to X	mm	315	320	-5
DX	Right Knee Bolster to X	mm	310	306	4
EX	Brake Pedal to X	mm	581	646	-65
FX	Foot Rest to X	mm	579	570	9
GX	Center of Steering Column Wheel Hub to X	mm	106	131	-25

X = Front of Seat Track (stationary)

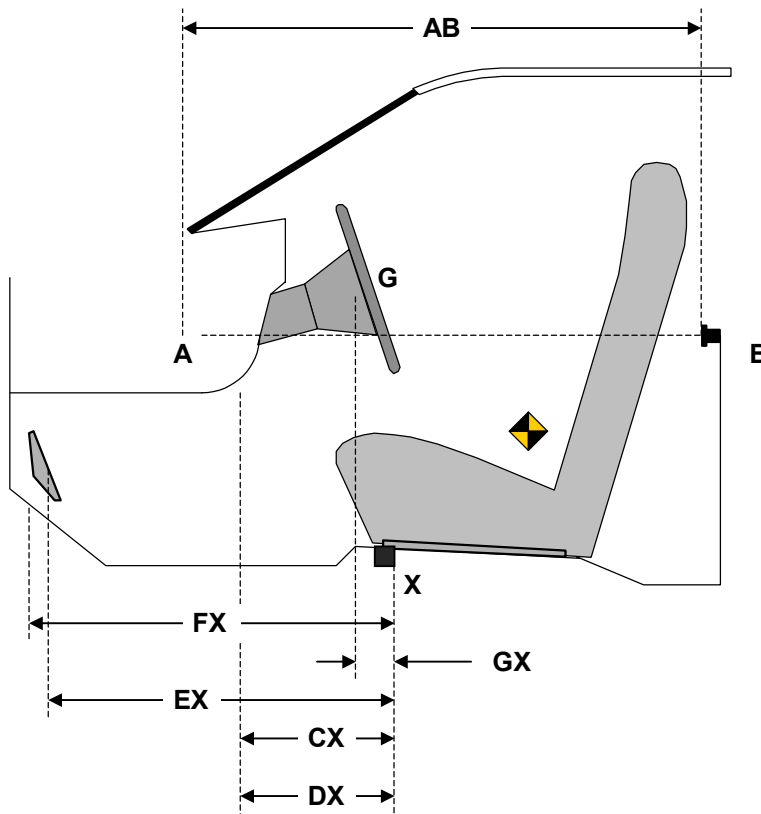

**DRIVER COMPARTMENT**

**DATA SHEET NO. 18... (continued)**  
**VEHICLE INTRUSION MEASUREMENTS**

Test Vehicle: 2005 Nissan Frontier  
 Test Program: 35mph Frontal Impact


NHTSA No.: M55210  
 Test Date: 02/07/2005

Measurement reference point for X and Z axis is the forward outboard seat mounting bolt.

Columns A through D are evenly spaced.

Rows 1 and 2 are on the toe kick portion of the floor pan. Rows 3, 4, and 5 are located on the most level portion of the floor pan.

Row 3 will be at the intersection of the toe kick and the level sections of the floor pan.

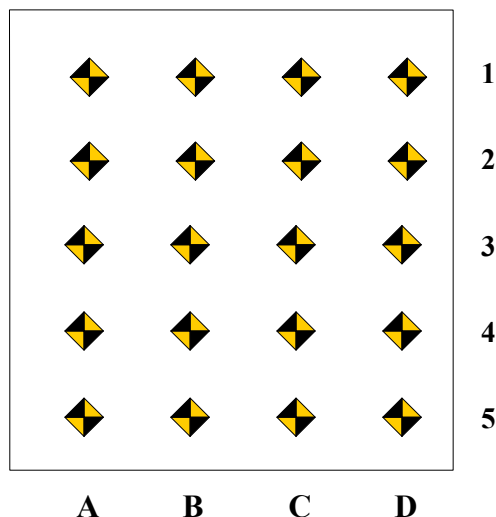

**DRIVER FLOOR PAN X-AXIS**

	Pre-Test				Post-Test				Difference			
	A	B	C	D	A	B	C	D	A	B	C	D
1		794	805	800		758	744	746		36	61	54
2		652	650	644		632	603	597		20	47	47
3		568	565	564		547	535	534		21	30	30
4	481	475	472	471	478	475	473	474	3	0	-1	-3
5	301	296	293	297	300	298	297	304	1	-2	-4	-7

**DRIVER FLOOR PAN Z-AXIS**

	Pre-Test				Post-Test				Difference			
	A	B	C	D	A	B	C	D	A	B	C	D
1		-60	-85	-80		-11	-25	-21		-49	-60	-59
2		-163	-165	-164		-130	-107	-111		-33	-58	-53
3		-189	-199	-202		-159	-167	-171		-30	-32	-31
4	-198	-188	-197	-203	-194	-169	-169	-172	-4	-19	-28	-31
5	-194	-188	-192	-197	-190	-182	-180	-183	-4	-6	-12	-14

**DATA SHEET NO. 18... (continued)**  
**VEHICLE INTRUSION MEASUREMENTS**

Test Vehicle: 2005 Nissan Frontier  
 Test Program: 35mph Frontal Impact


NHTSA No.: M55210  
 Test Date: 02/07/2005

Measurement reference point for X and Z axis is the forward outboard seat mounting bolt.

Columns A through D are evenly spaced.

Rows 1 and 2 are on the toe kick portion of the floor pan. Rows 3, 4, and 5 are located on the most level portion of the floor pan.

Row 3 will be at the intersection of the toe kick and the level sections of the floor pan.

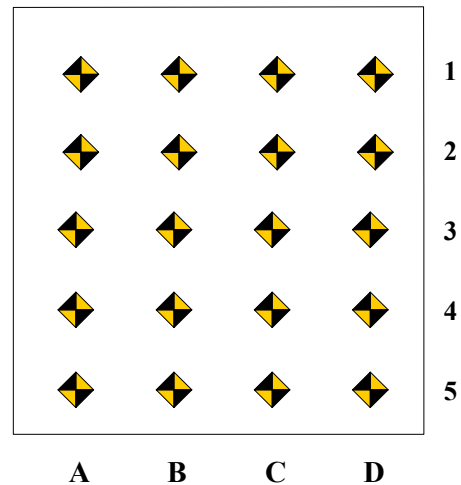

**PASSENGER FLOOR PAN X-AXIS**

	Pre-Test				Post-Test				Difference			
	A	B	C	D	A	B	C	D	A	B	C	D
1	704	708	713		676	690	705		28	18	8	
2	626	629	631	633	602	613	623	630	24	16	8	3
3	547	543	545	546	538	532	536	543	9	11	9	3
4	455	454	459	459	452	450	455	457	3	4	4	2
5		280	279	281		281	280	280		-1	-1	1


**PASSENGER FLOOR PAN Z-AXIS**

	Pre-Test				Post-Test				Difference			
	A	B	C	D	A	B	C	D	A	B	C	D
1	-141	-140	-149		-103	-109	-126		-38	-31	-23	
2	-179	-177	-183	-185	-147	-153	-164	-169	-32	-24	-19	-16
3	-211	-204	-195	-204	-198	-192	-179	-189	-13	-12	-16	-15
4	-208	-203	-194	-197	-193	-194	-183	-195	-15	-9	-11	-2
5		-194	-190	-197		-186	-187	-192		-8	-3	-5


**DATA SHEET NO. 18... (continued)**  
**VEHICLE INTRUSION MEASUREMENTS**

Test Vehicle: 2005 Nissan Frontier  
 Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
 Test Date: 02/07/2005

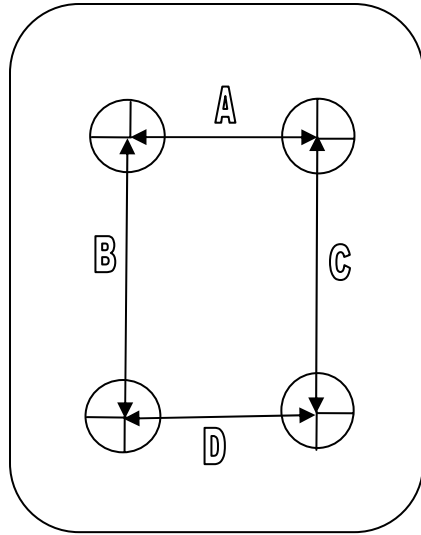

Driver

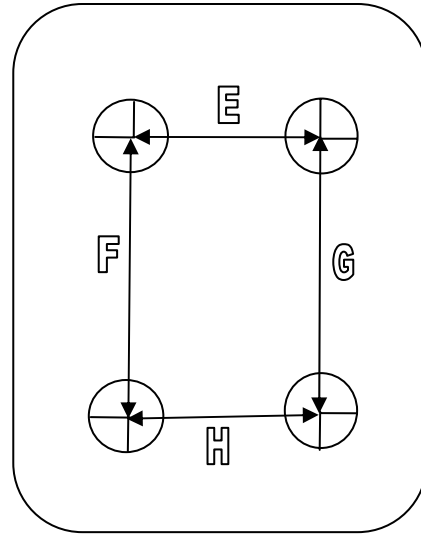

Passenger

**UNDERBODY FLOORBOARD DEFORMATION**


Measurement	Pre-Test	Post-Test	Difference
A	150	147	3
B	350	347	3
C	330	322	8
D	140	137	3
E	147	147	0
F	227	225	2
G	245	245	0
H	150	150	0

**DATA SHEET NO. 19**  
**LOAD CELL LOCATIONS ON FIXED BARRIER**

Test Vehicle: 2005 Nissan Frontier  
 Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
 Test Date: 02/07/2005

**144 Load Cell Rigid Barrier**  
**Load Cell Locations on Fixed Barrier**

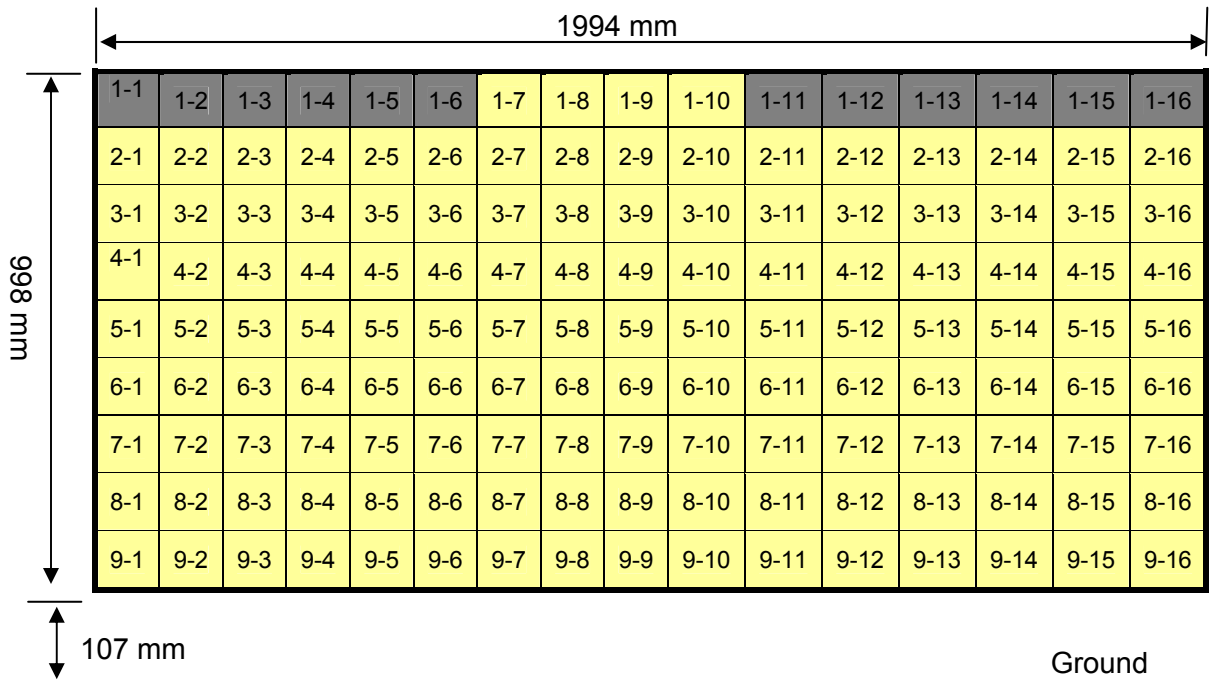

Load Cells are 121 mm x 121 mm with a 7 mm gap in between each load cell.

Note: 1-10 and 6-9 did not collect any valid data.

The data is presented in Appendix B with the following requirements:

1. Overlay plot of summed force from each row.
2. Total force of all 9 rows (144 individual load cells).

Note: Data tape includes all individual load cell data.

**DATA SHEET NO. 20**

**ACCIDENT INVESTIGATION DIVISION DATA**

Test Vehicle: 2005 Nissan Frontier  
Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
Test Date: 02/07/2005

**VEHICLE INFORMATION**

VIN: 1N6AD07W05C406902 Wheelbase (mm) : 3200  
Vehicle Size Category: Truck Test Weight (kg) : 2320.1

**ACCELEROMETER DATA**

Accelerometer Locations: As per measurements on Page 14  
Cal. Procedure/Interval: MGA procedure / 6 month  
Integration Algorithm: Trapezoidal Linearity: > 99%  
Impact Velocity (km/h): 56.3  
Velocity Change (km/h): 63.7 Time of Separation (msec): 93

**CRUSH PROFILE**

Collision Deformation Classification: Frontal Midpoint of Damage: Centerline  
Damage Region Length (mm): 1520 Impact Mode: Frontal


No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
C1	Crush zone 1 at left side	mm	5092	4738	354
C2	Crush zone 2 at left side	mm	5169	4744	425
C3	Crush zone 3 at left side	mm	5206	4745	461
C4	Crush zone 4 at right side	mm	5207	4744	463
C5	Crush zone 5 at right side	mm	5169	4741	428
C6	Crush zone 6 at right side	mm	5092	4728	364
L	C1 TO C6	mm	1533	1523	10

# DATA SHEET NO. 21

## DUMMY / VEHICLE TEMPERATURE STABILIZATION CHART

Test Vehicle: 2005 Nissan Frontier  
Test Program: 35mph Frontal Impact

NHTSA No.: M55210  
Test Date: 02/07/2005

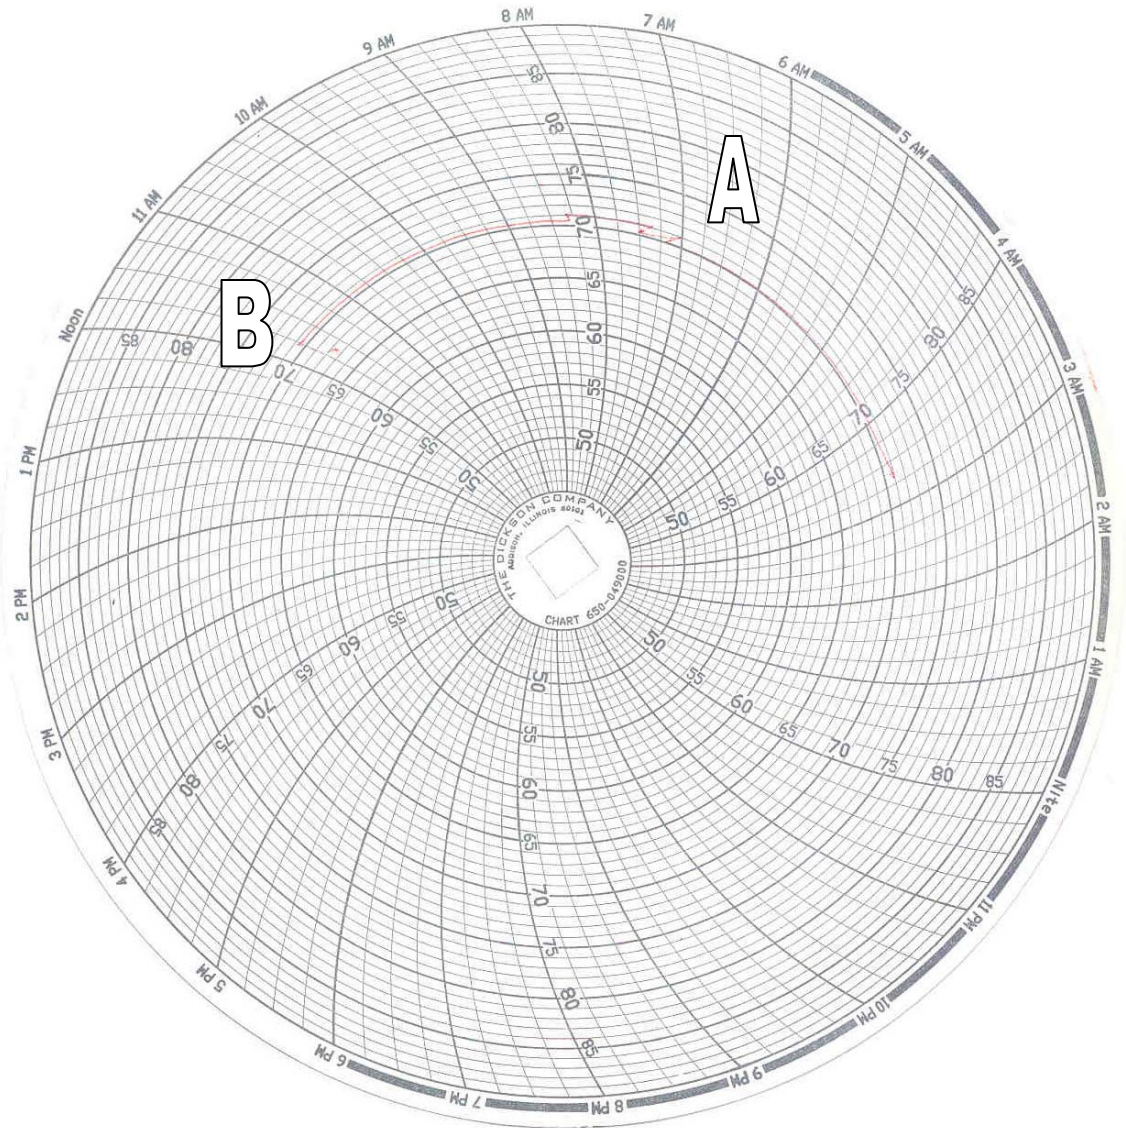

A = Dummies installed in vehicle at 7:00 am

B = Test conducted at 11:53 am

**APPENDIX A**  
**PHOTOGRAPHS**

## TABLE OF PHOTOGRAPHS

		<u>Page No.</u>
Photo No. 1.	Load Cell Location	A-1
Photo No. 2.	Vehicle Certification Label	A-2
Photo No. 3.	Tire Placard	A-3
Photo No. 4.	Right Front View of Test Vehicle, as received	A-4
Photo No. 5.	Left Rear View of Test Vehicle, as received	A-5
Photo No. 6.	Pre-Test Front View of Test Vehicle	A-6
Photo No. 7.	Post-Test Front View of Test Vehicle	A-7
Photo No. 8.	Pre-Test Left Side View of Test Vehicle	A-8
Photo No. 9.	Post-Test Left Side View of Test Vehicle	A-9
Photo No. 10.	Pre-Test Right Side View of Test Vehicle	A-10
Photo No. 11.	Post-Test Right Side View of Test Vehicle	A-11
Photo No. 12.	Pre-Test Right Front Three-Quarter View of Test Vehicle	A-12
Photo No. 13.	Post-Test Right Front Three-Quarter View of Test Vehicle	A-13
Photo No. 14.	Pre-Test Left Rear Three-Quarter View of Test Vehicle	A-14
Photo No. 15.	Post-Test Left Rear Three-Quarter View of Test Vehicle	A-15
Photo No. 16.	Pre-Test Left Rear Three-Quarter View of Doors	A-16
Photo No. 17.	Post-Test Left Rear Three-Quarter View of Doors	A-17
Photo No. 18.	Pre-Test Right Rear Three-Quarter View of Doors	A-18
Photo No. 19.	Post-Test Right Rear Three-Quarter View of Doors	A-19
Photo No. 20.	Pre-Test Windshield View	A-20
Photo No. 21.	Post-Test Windshield View	A-21
Photo No. 22.	Pre-Test Engine Compartment View	A-22
Photo No. 23.	Post-Test Engine Compartment View	A-23
Photo No. 24.	Pre-Test Fuel Filler Cap View	A-24
Photo No. 25.	Post-Test Fuel Filler Cap View	A-25
Photo No. 26.	Pre-Test Front Underbody View	A-26
Photo No. 27.	Post-Test Front Underbody View	A-27
Photo No. 28.	Pre-Test Front Mid Underbody	A-28

Page No.

Photo No. 29.	Post-Test Front Mid Underbody	A-29
Photo No. 30.	Pre-Test Rear Mid Underbody View	A-30
Photo No. 31.	Post-Test Rear Mid Underbody View	A-31
Photo No. 32.	Pre-Test Rear Underbody View	A-32
Photo No. 33.	Post-Test Rear Underbody View	A-33
Photo No. 34.	Pre-Test Driver Dummy Front View (head position)	A-34
Photo No. 35.	Post-Test Driver Dummy Front View (head position)	A-35
Photo No. 36.	Pre-Test Driver Dummy Position Left Side View	A-36
Photo No. 37.	Post-Test Driver Dummy Position Left Side View	A-37
Photo No. 38.	Pre-Test Driver Dummy Position Left Side View (Door Open)	A-38
Photo No. 39.	Post-Test Driver Dummy Position Left Side View (Door Open)	A-39
Photo No. 40.	Pre-Test Driver Dummy Seat Position	A-40
Photo No. 41.	Post-Test Driver Dummy Seat Position	A-41
Photo No. 42.	Pre-Test Driver Dummy Feet Position	A-42
Photo No. 43.	Post-Test Driver Dummy Feet Position	A-43
Photo No. 44.	Pre-Test Driver Side Knee Bolster View	A-44
Photo No. 45.	Post-Test Driver Side Knee Bolster View	A-45
Photo No. 46.	Pre-Test Driver Side Floor Pan View	A-46
Photo No. 47.	Post-Test Driver Side Floor Pan View	A-47
Photo No. 48.	Post-Test Driver Dummy Head Contact	A-48
Photo No. 49.	Post-Test Driver Dummy Knee Contact	A-49
Photo No. 50.	Post-Test Driver Dummy Airbag Contact	A-50
Photo No. 51.	Pre-Test Passenger Dummy Front View (head position)	A-51
Photo No. 52.	Post-Test Passenger Dummy Front View (head position)	A-52
Photo No. 53.	Pre-Test Passenger Dummy Position Right Side View	A-53
Photo No. 54.	Post-Test Passenger Dummy Position Right Side View	A-54
Photo No. 55.	Pre-Test Passenger Dummy Position Right Side View (Door Open)	A-55
Photo No. 56.	Post-Test Passenger Dummy Position Right Side View (Door Open)	A-56
Photo No. 57.	Pre-Test Passenger Dummy Seat Position	A-57
Photo No. 58.	Post-Test Passenger Dummy Seat Position	A-58

Page No.

Photo No. 59.	Pre-Test Passenger Dummy Feet Position	A-59
Photo No. 60.	Post-Test Passenger Dummy Feet Position	A-60
Photo No. 61.	Pre-Test Passenger Side Knee Bolster View	A-61
Photo No. 62.	Post-Test Passenger Side Knee Bolster View	A-62
Photo No. 63.	Pre-Test Passenger Side Floor Pan View	A-63
Photo No. 64.	Post-Test Passenger Side Floor Pan View	A-64
Photo No. 65.	Post-Test Passenger Dummy Head Contact	A-65
Photo No. 66.	Post-Test Passenger Dummy Head Contact (visor)	A-66
Photo No. 67.	Post-Test Passenger Dummy Knee Contact	A-67
Photo No. 68.	Post-Test Passenger Dummy Airbag Contact	A-68
Photo No. 69.	Rollover 90 Degrees	A-69
Photo No. 70.	Rollover 180 Degrees	A-70
Photo No. 71.	Rollover 270 Degrees	A-71
Photo No. 72.	Rollover 360 Degrees	A-72
Photo No. 73.	Vehicle Impact	A-73

A-1.



Load Cell Location

MFD BY NISSAN MOTOR CO., LTD.

DATE 11/04  
GVWR 5815 LB  
GAWR FR. 3296 LB  
WITH P265/70R16 TIRES  
16X7.0 RIMS AT 35 PSI  
COLD SINGLE  
GAWR RR. 3265 LB  
WITH P265/70R16 TIRES  
16X7.0 RIMS AT 35 PSI  
COLD SINGLE

THIS VEHICLE CONFORMS TO  
ALL APPLICABLE FEDERAL MOTOR  
VEHICLE SAFETY AND  
THEFT PREVENTION STANDARDS  
IN EFFECT ON THE DATE OF  
MANUFACTURE SHOWN ABOVE.  
SEE OWNERS MANUAL FOR  
ADDITIONAL INFORMATION.

1N6AD07W05C 406902

TRUCK 066  
MODEL: CCKNLRN-EUN 0Z000

COLOR	TRIM	TRANS
K27	W	RE5R05A
AXLE	ENGINE	
CA33	VQ40	3954CC



Vehicle Certification Label

RECOMMENDED COLD TIRE INFLATION PRESSURE PRESSION DE GONFLAGE RECOMMANDEE DES PNEUS FROIDS		
TIRE SIZE DIMENSIONS		kPa (psi)
P235/75R15	P245/75R16	FRONT: 240 (35)
P265/70R16	P265/75R16	
P265/65R17		REAR: 240 (35)

99090 EA00A

Tire Placard

A-4.



Right Front View of Test Vehicle, as received

A-5.




Left Rear View of Test Vehicle, as received



Pre-Test Front View of Test Vehicle

A-7.

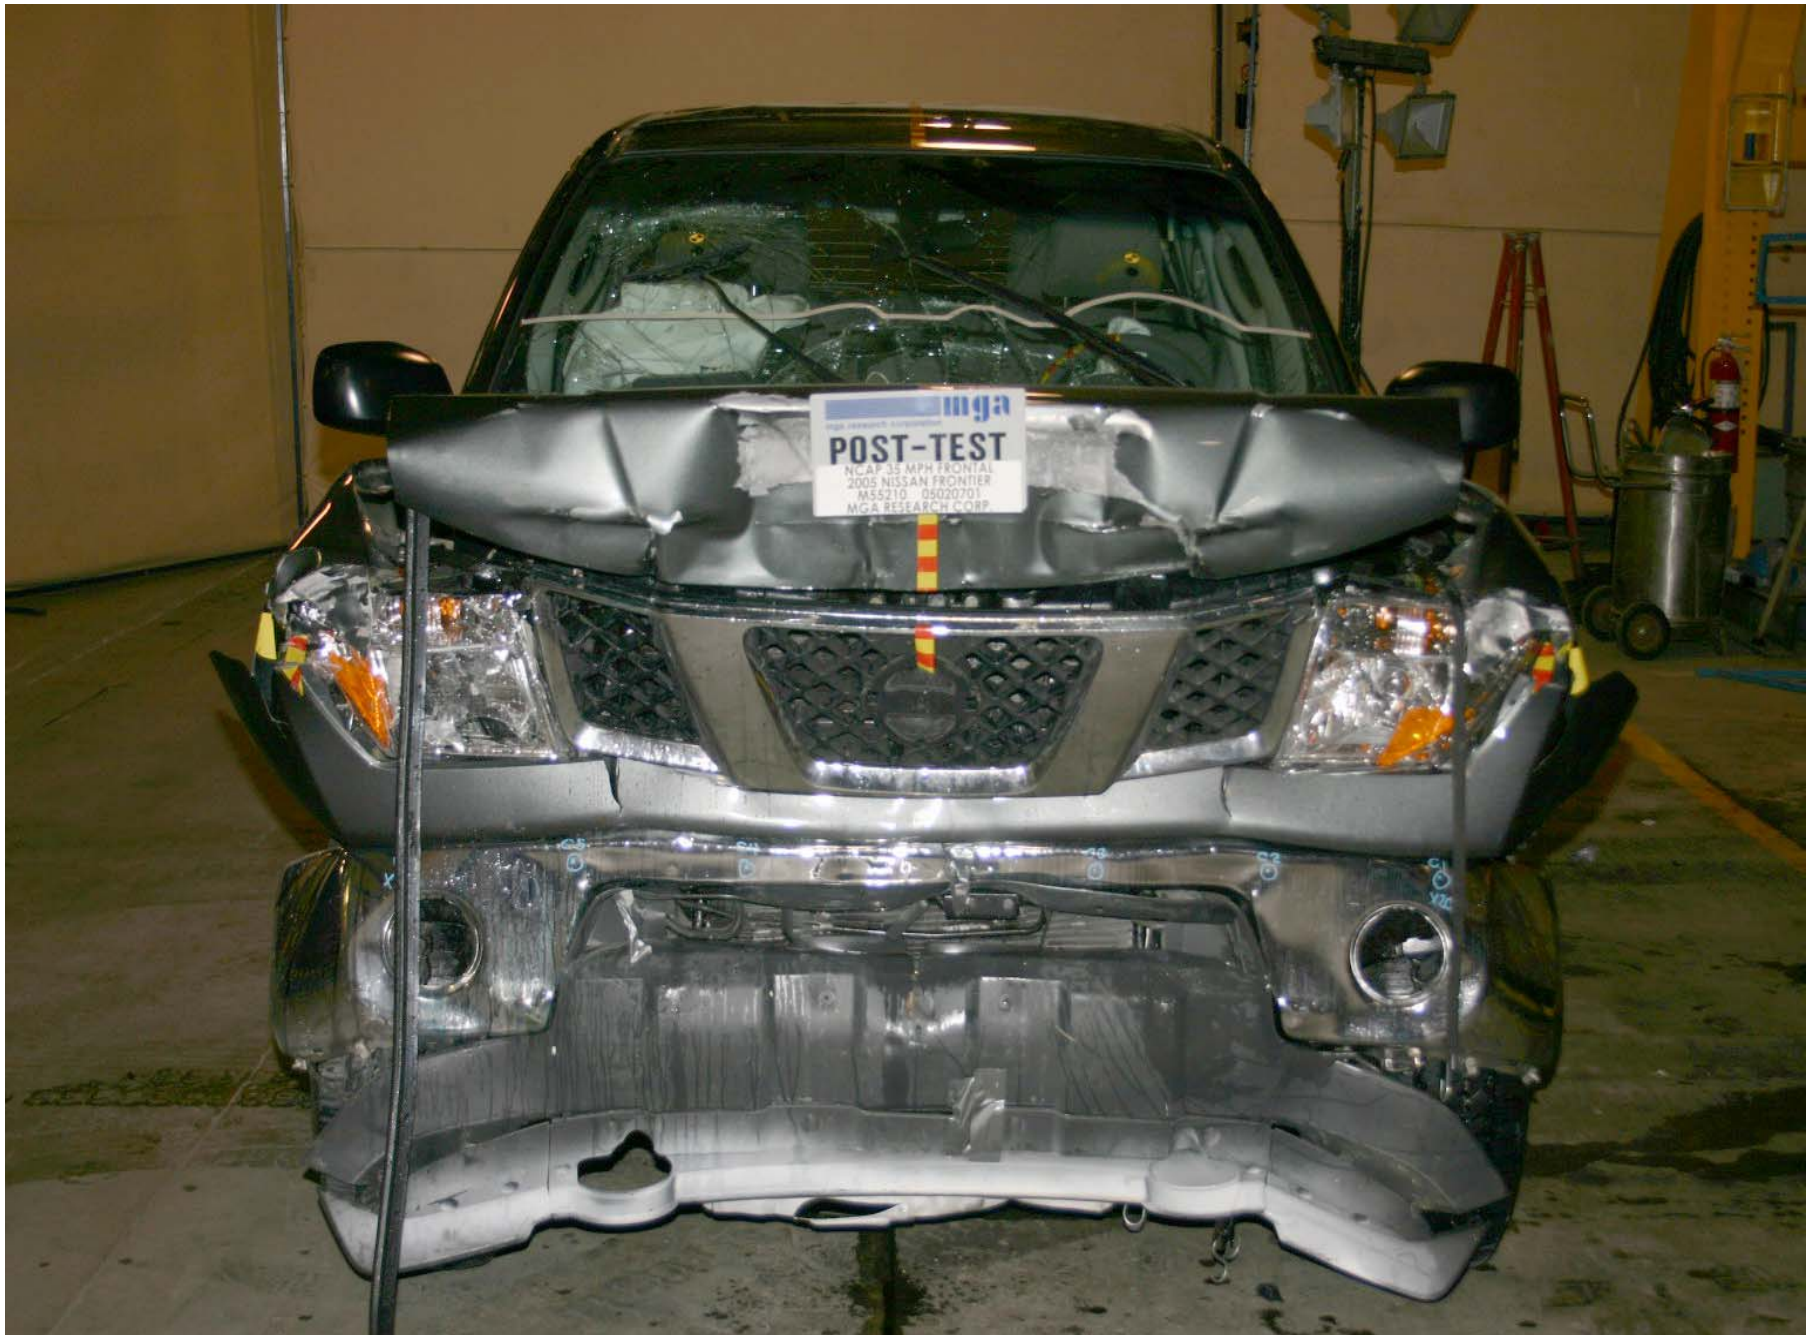

Post-Test Front View of Test Vehicle

A-8.



Pre-Test Left Side View of Test Vehicle

A-9.



Post-Test Left Side View of Test Vehicle

A-10.



Pre-Test Right Side View of Test Vehicle

A-11.



Post-Test Right Side View of Test Vehicle



Pre-Test Right Front Three-Quarter View of Test Vehicle



Post-Test Right Front Three-Quarter View of Test Vehicle

A-14.



Pre-Test Left Rear Three-Quarter View of Test Vehicle



Post-Test Left Rear Three-Quarter View of Test Vehicle



Pre-Test Left Rear Three-Quarter View of Doors



Post-Test Left Rear Three-Quarter View of Doors



Pre-Test Right Rear Three-Quarter View of Doors



Post-Test Right Rear Three-Quarter View of Doors

A-20.



Pre-Test Windshield View

A-21.



Post-Test Windshield View

A-22.



Pre-Test Engine Compartment View

A-23.



Post-Test Engine Compartment View

  
mga research corporation  
**PRE-TEST**  
NCAP 35 MPH FRONTAL  
2005 NISSAN FRONTIER  
M55210 05020701  
MGA RESEARCH CORP.




A-24.


Pre-Test Fuel Filler Cap View




Post-Test Fuel Filler Cap View

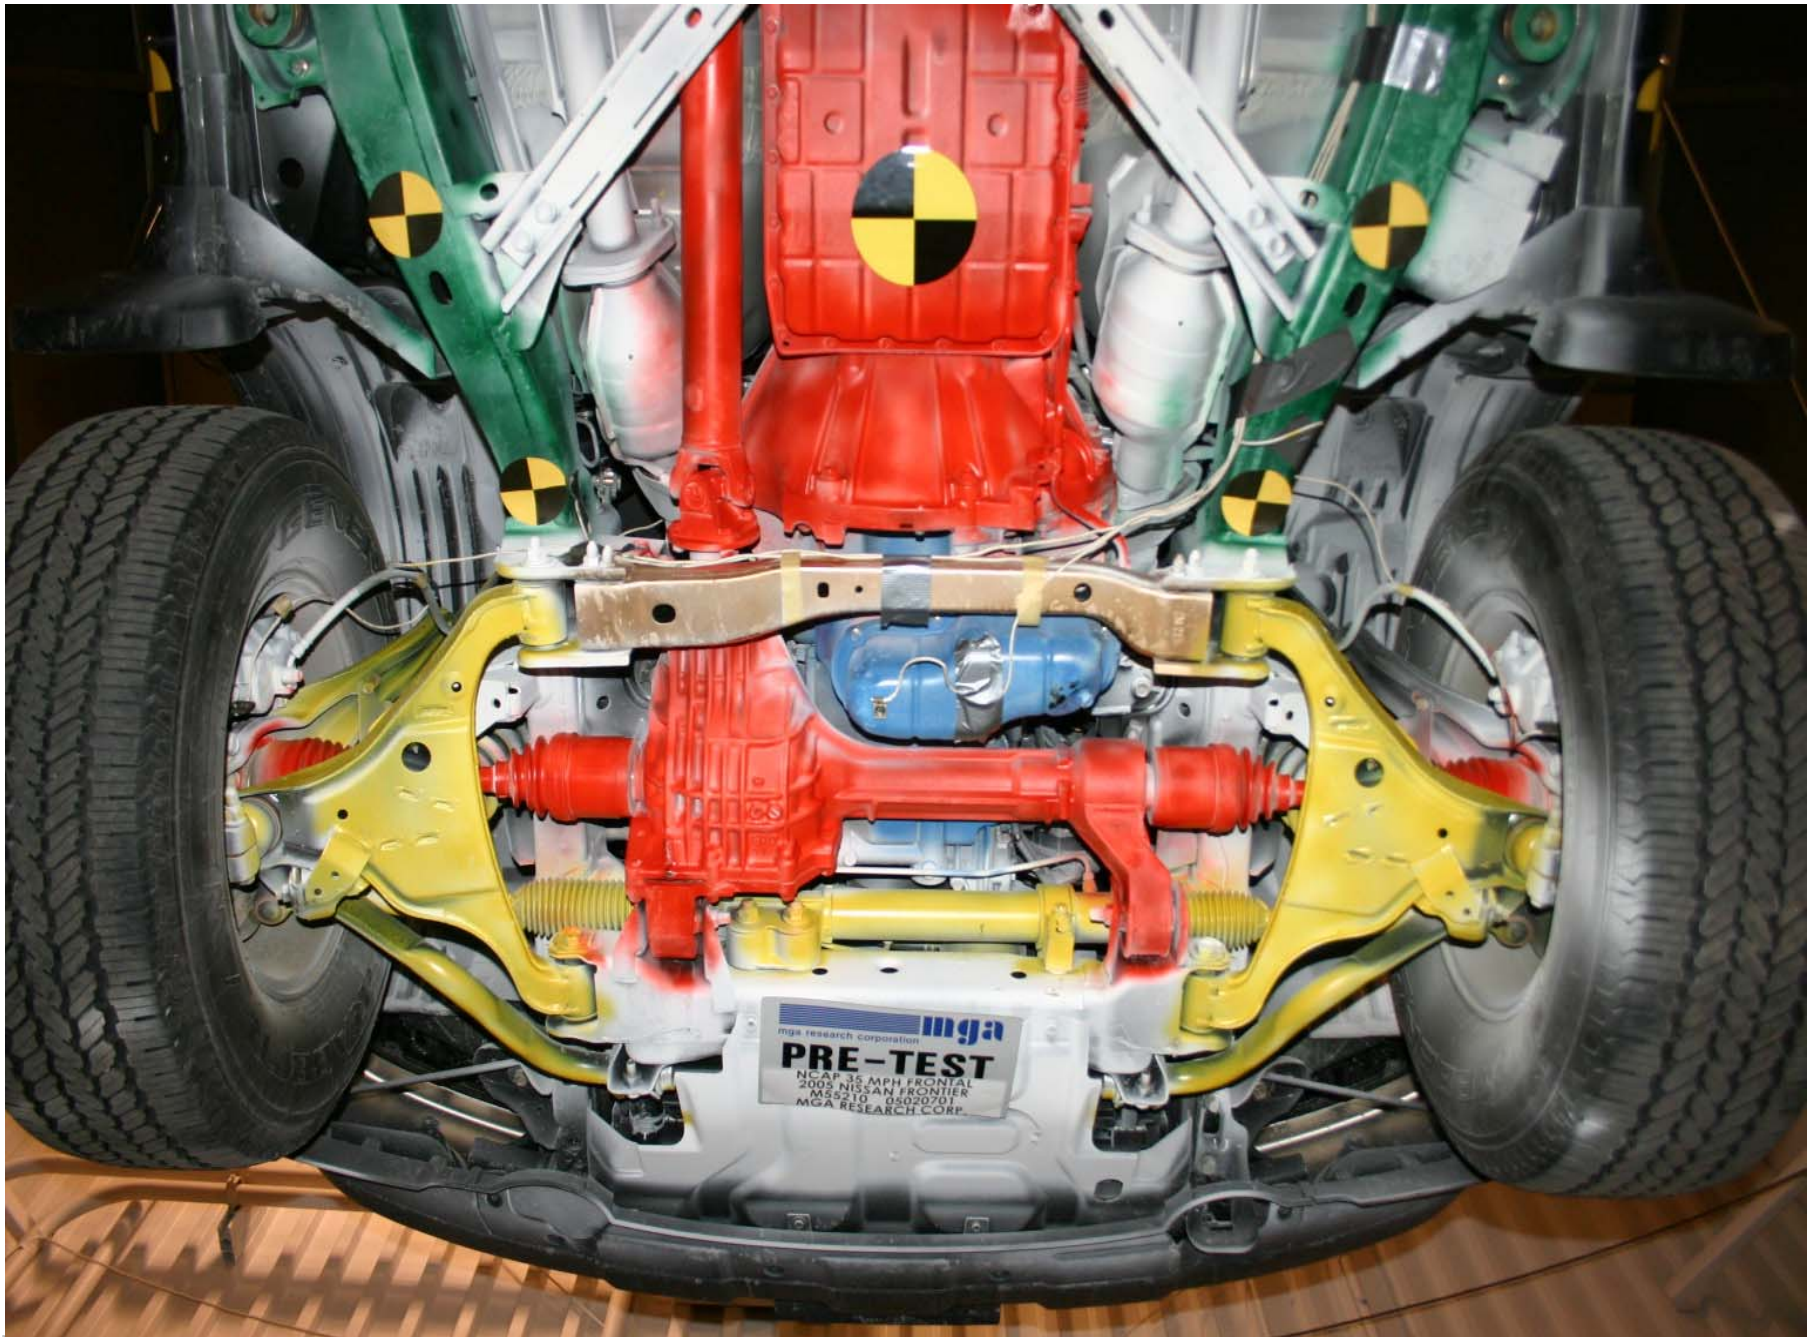


Pre-Test Front Underbody View

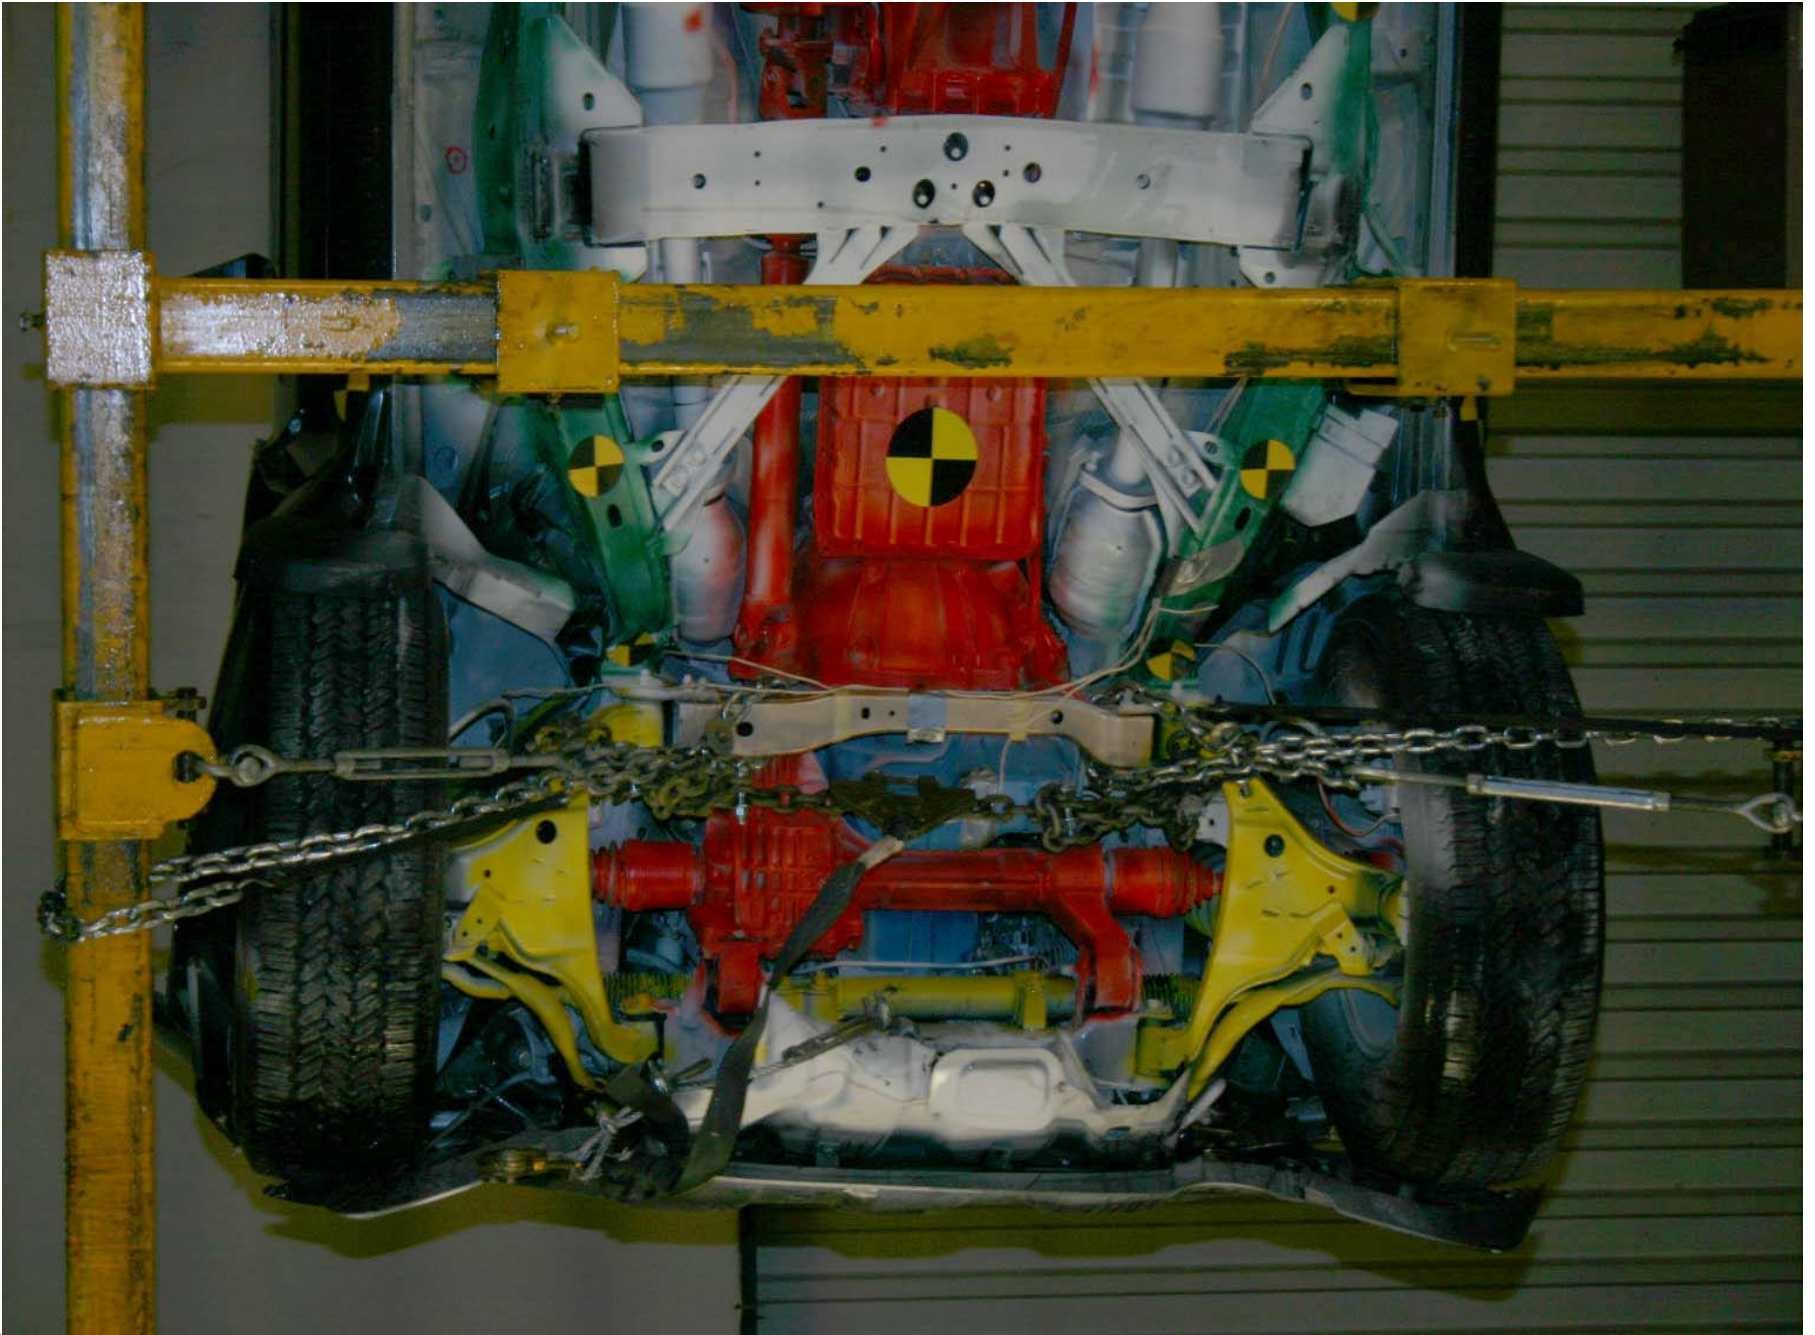


Post-Test Front Underbody View

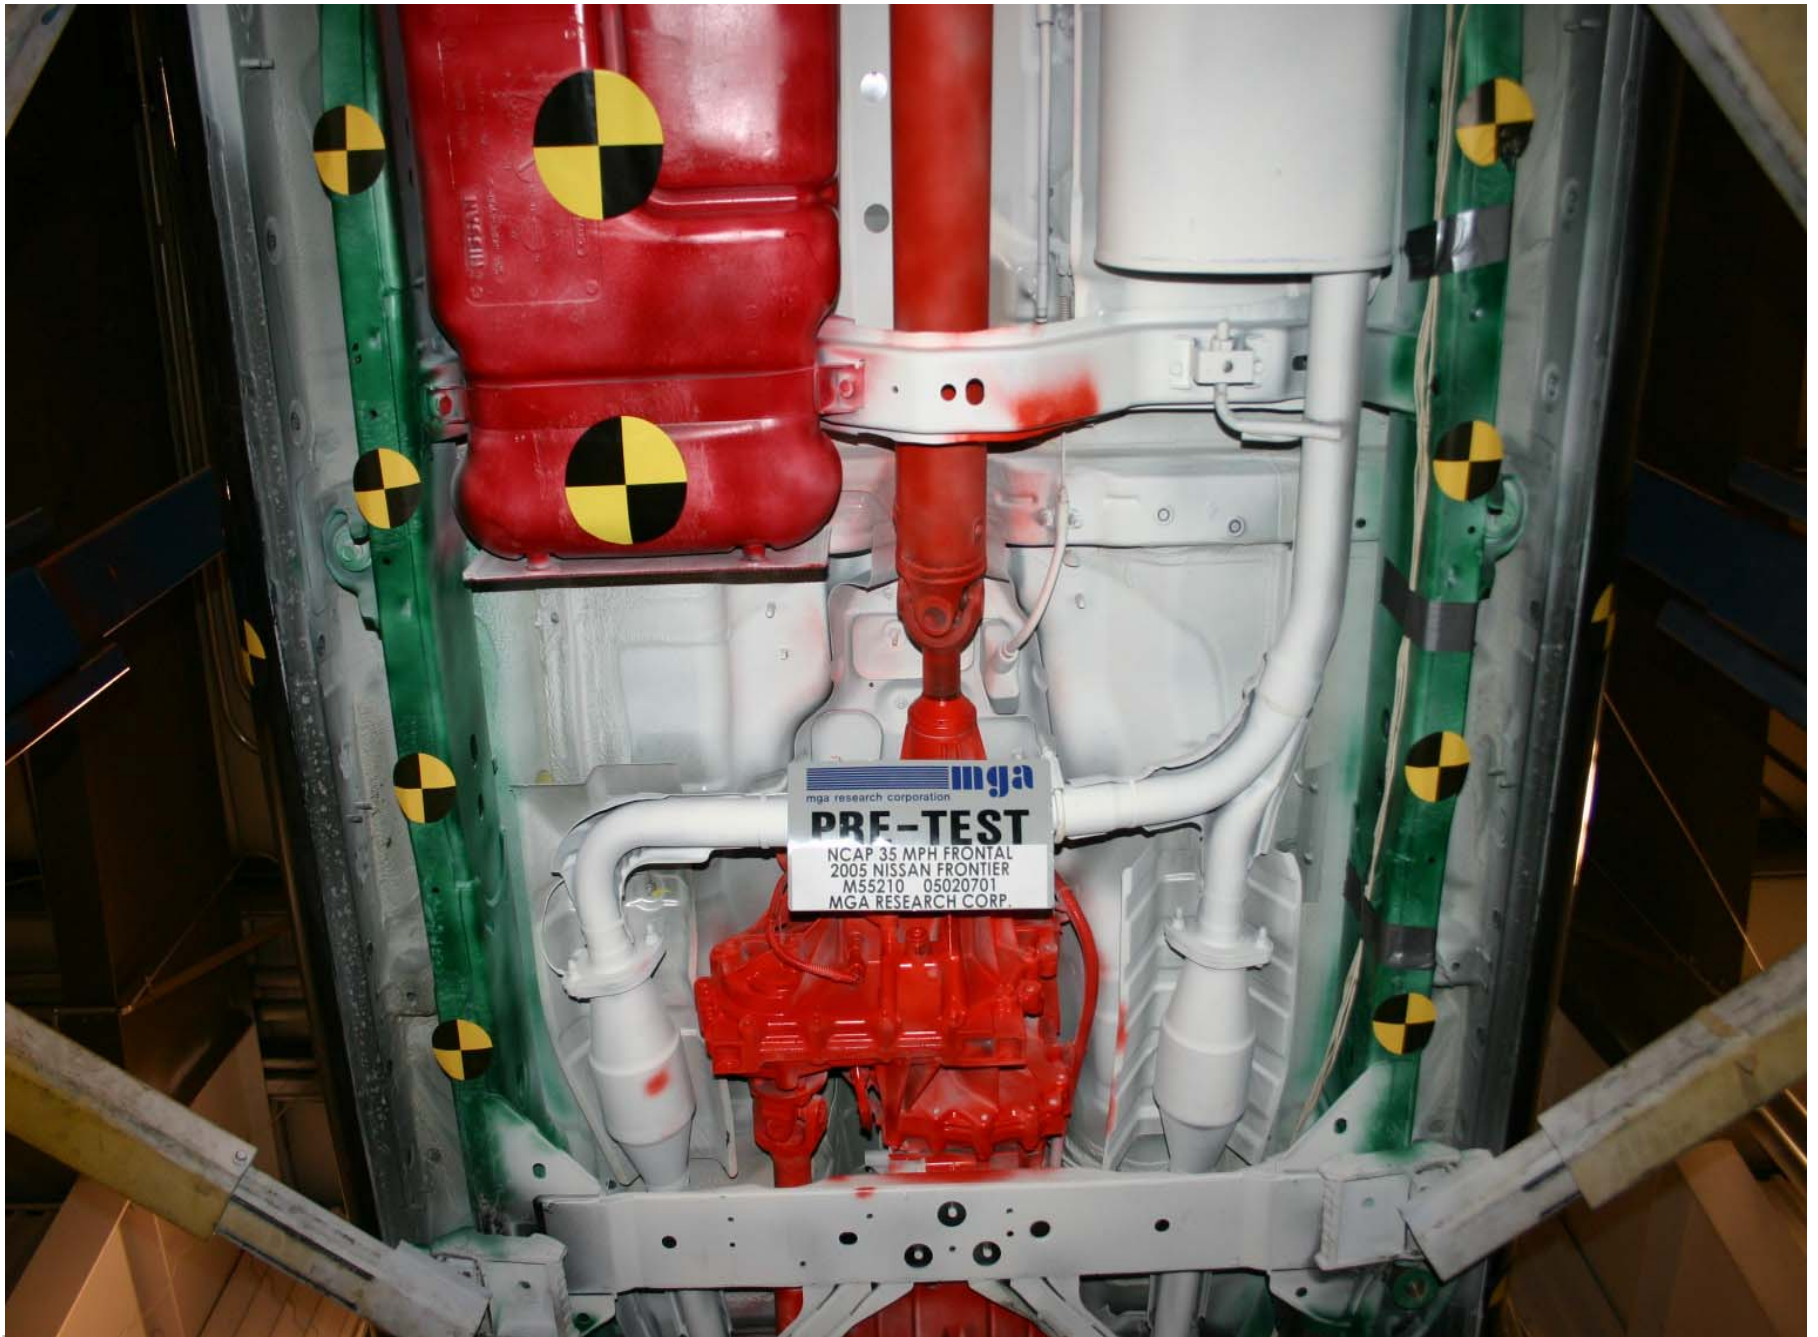


Pre-Test Front Mid Underbody

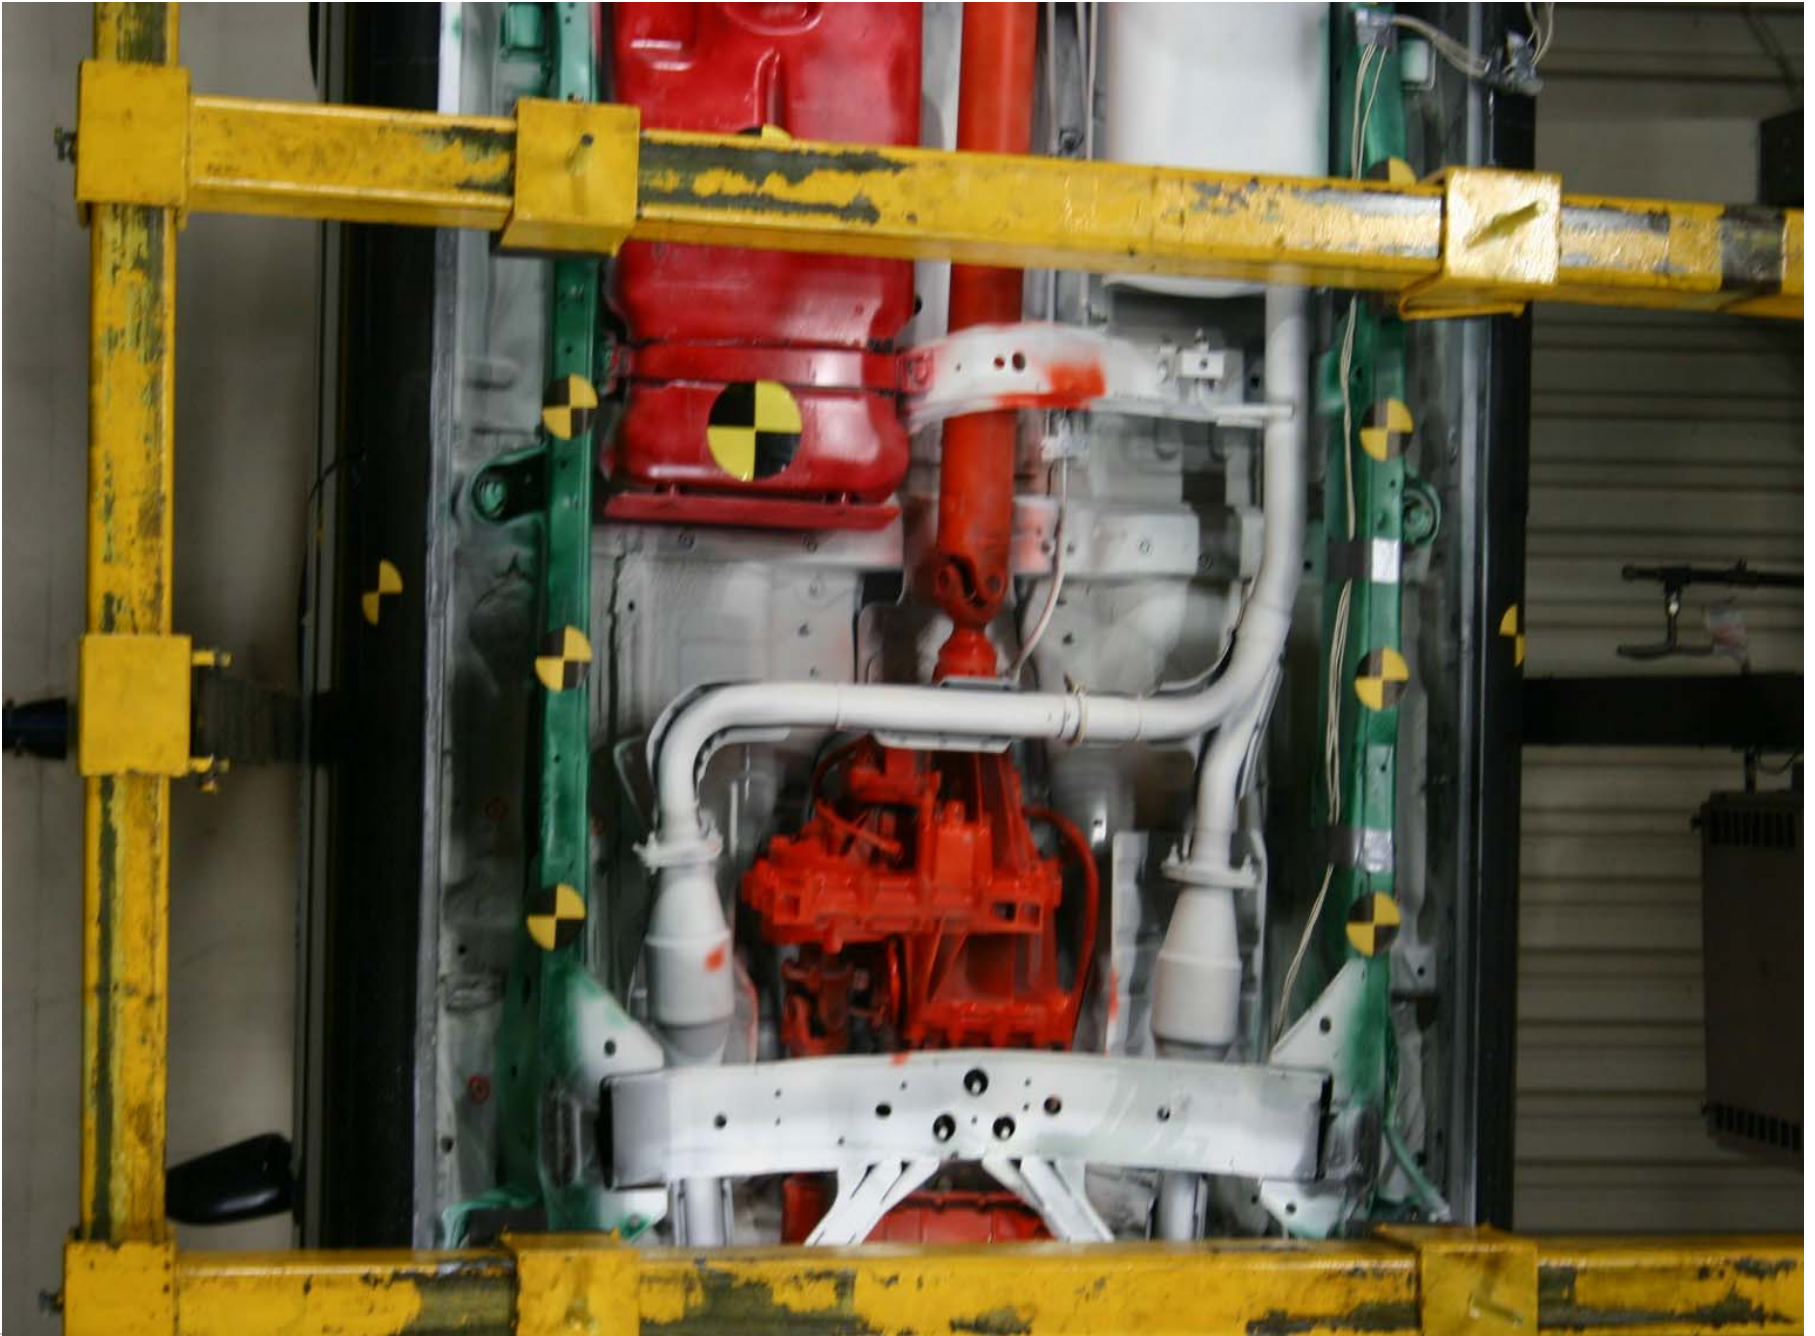

Post-Test Front Mid Underbody

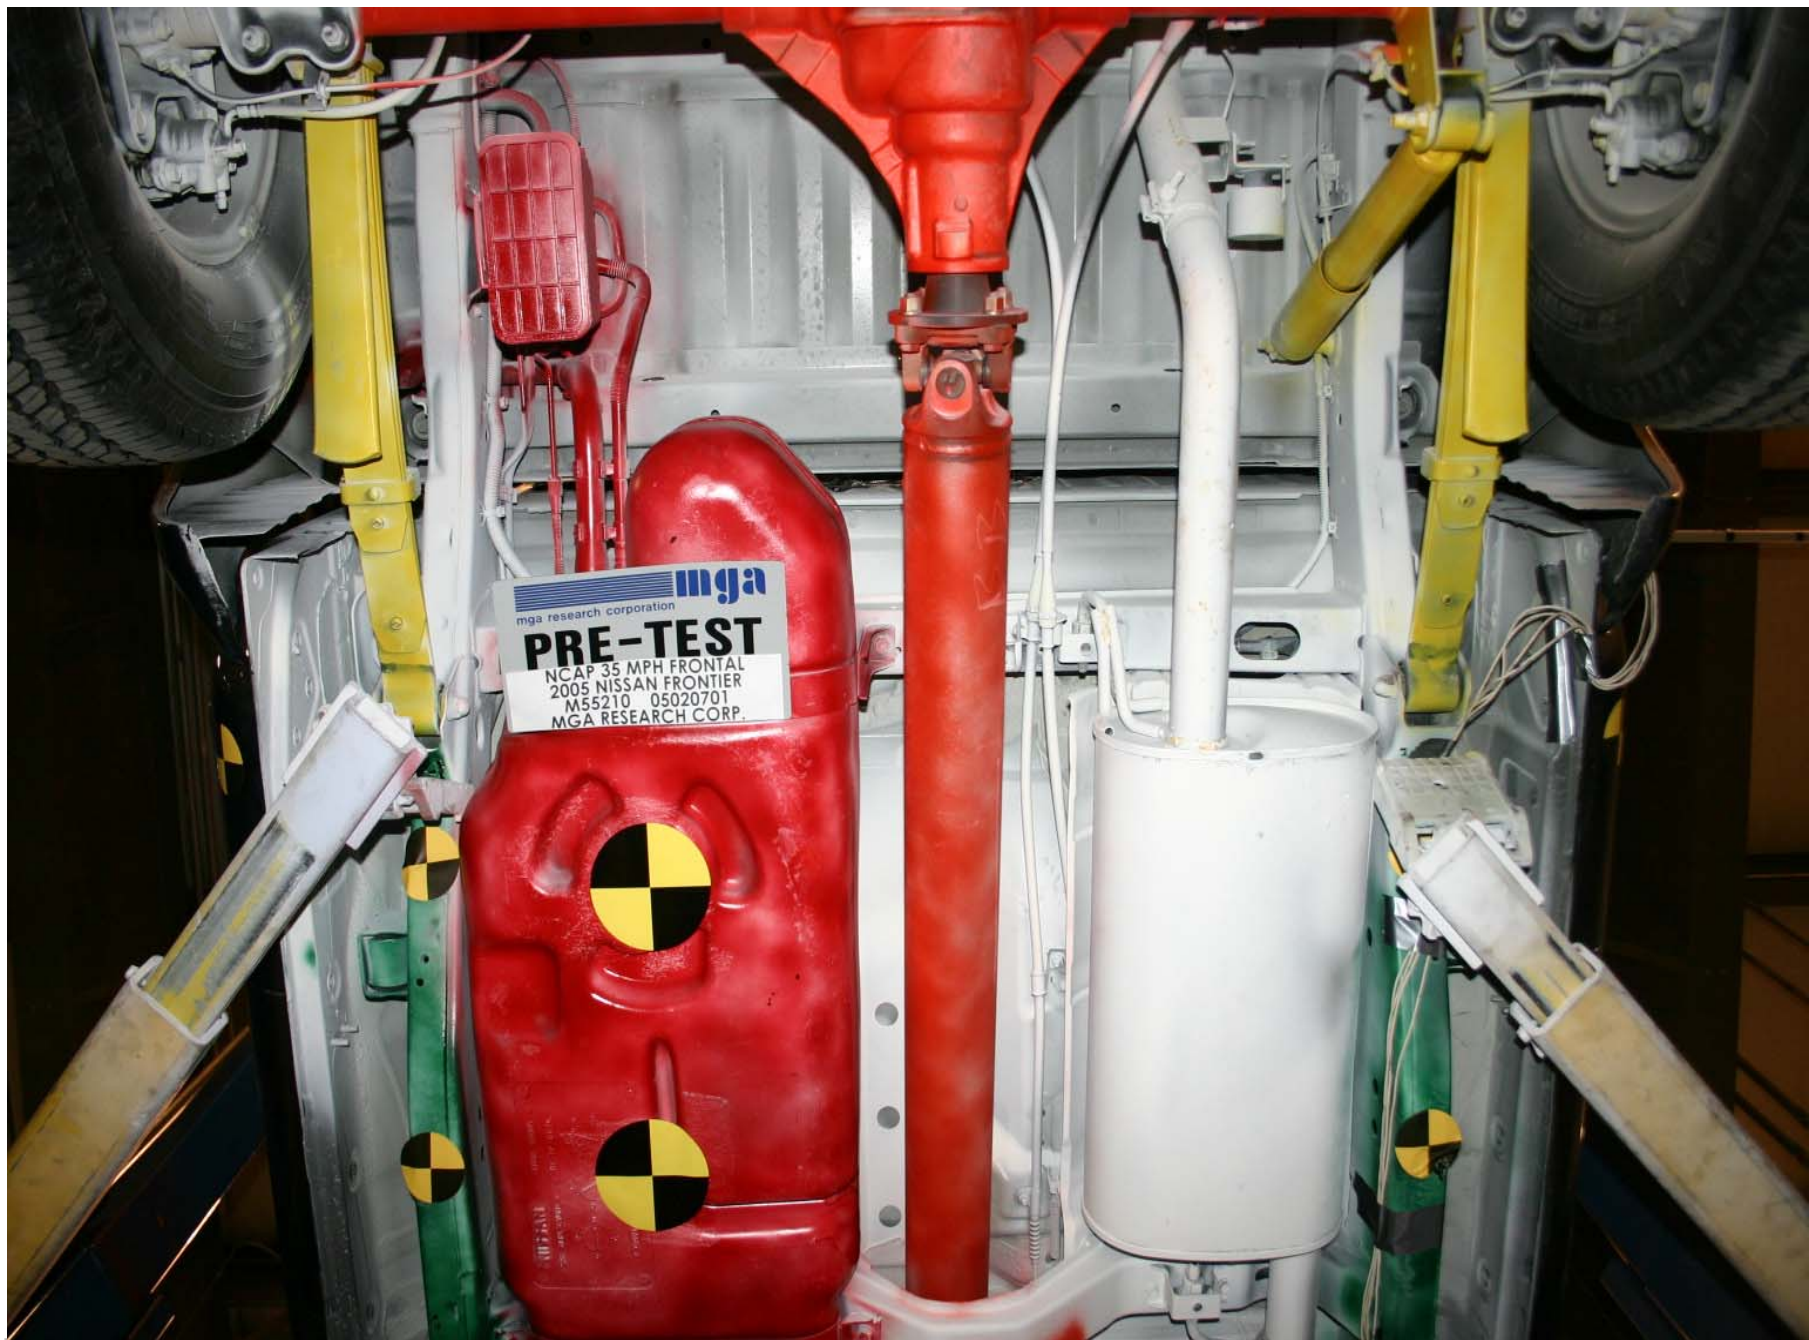

Pre-Test Rear Mid Underbody View

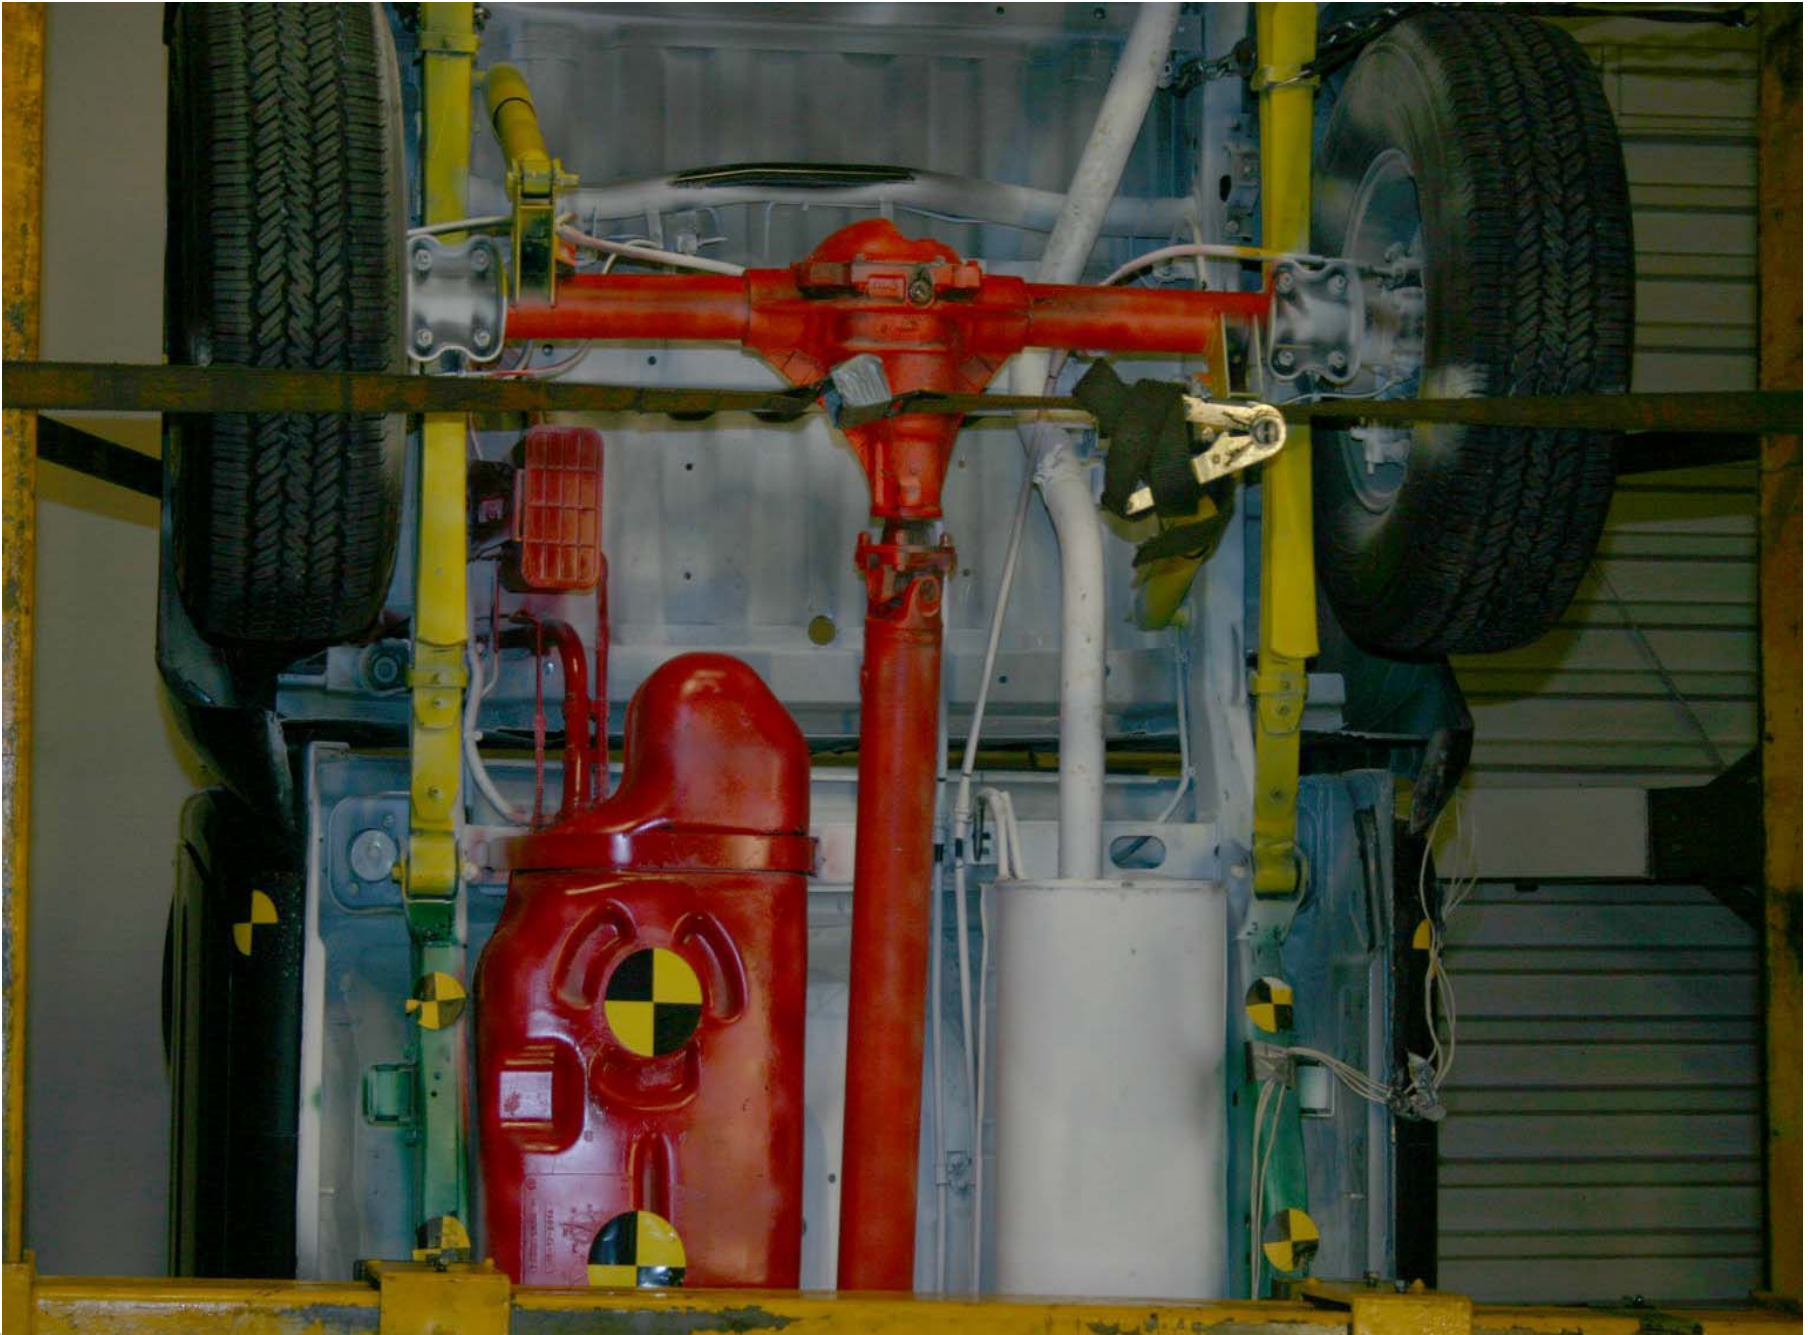


Post-Test Rear Mid Underbody View



Pre-Test Rear Underbody View

A-33.

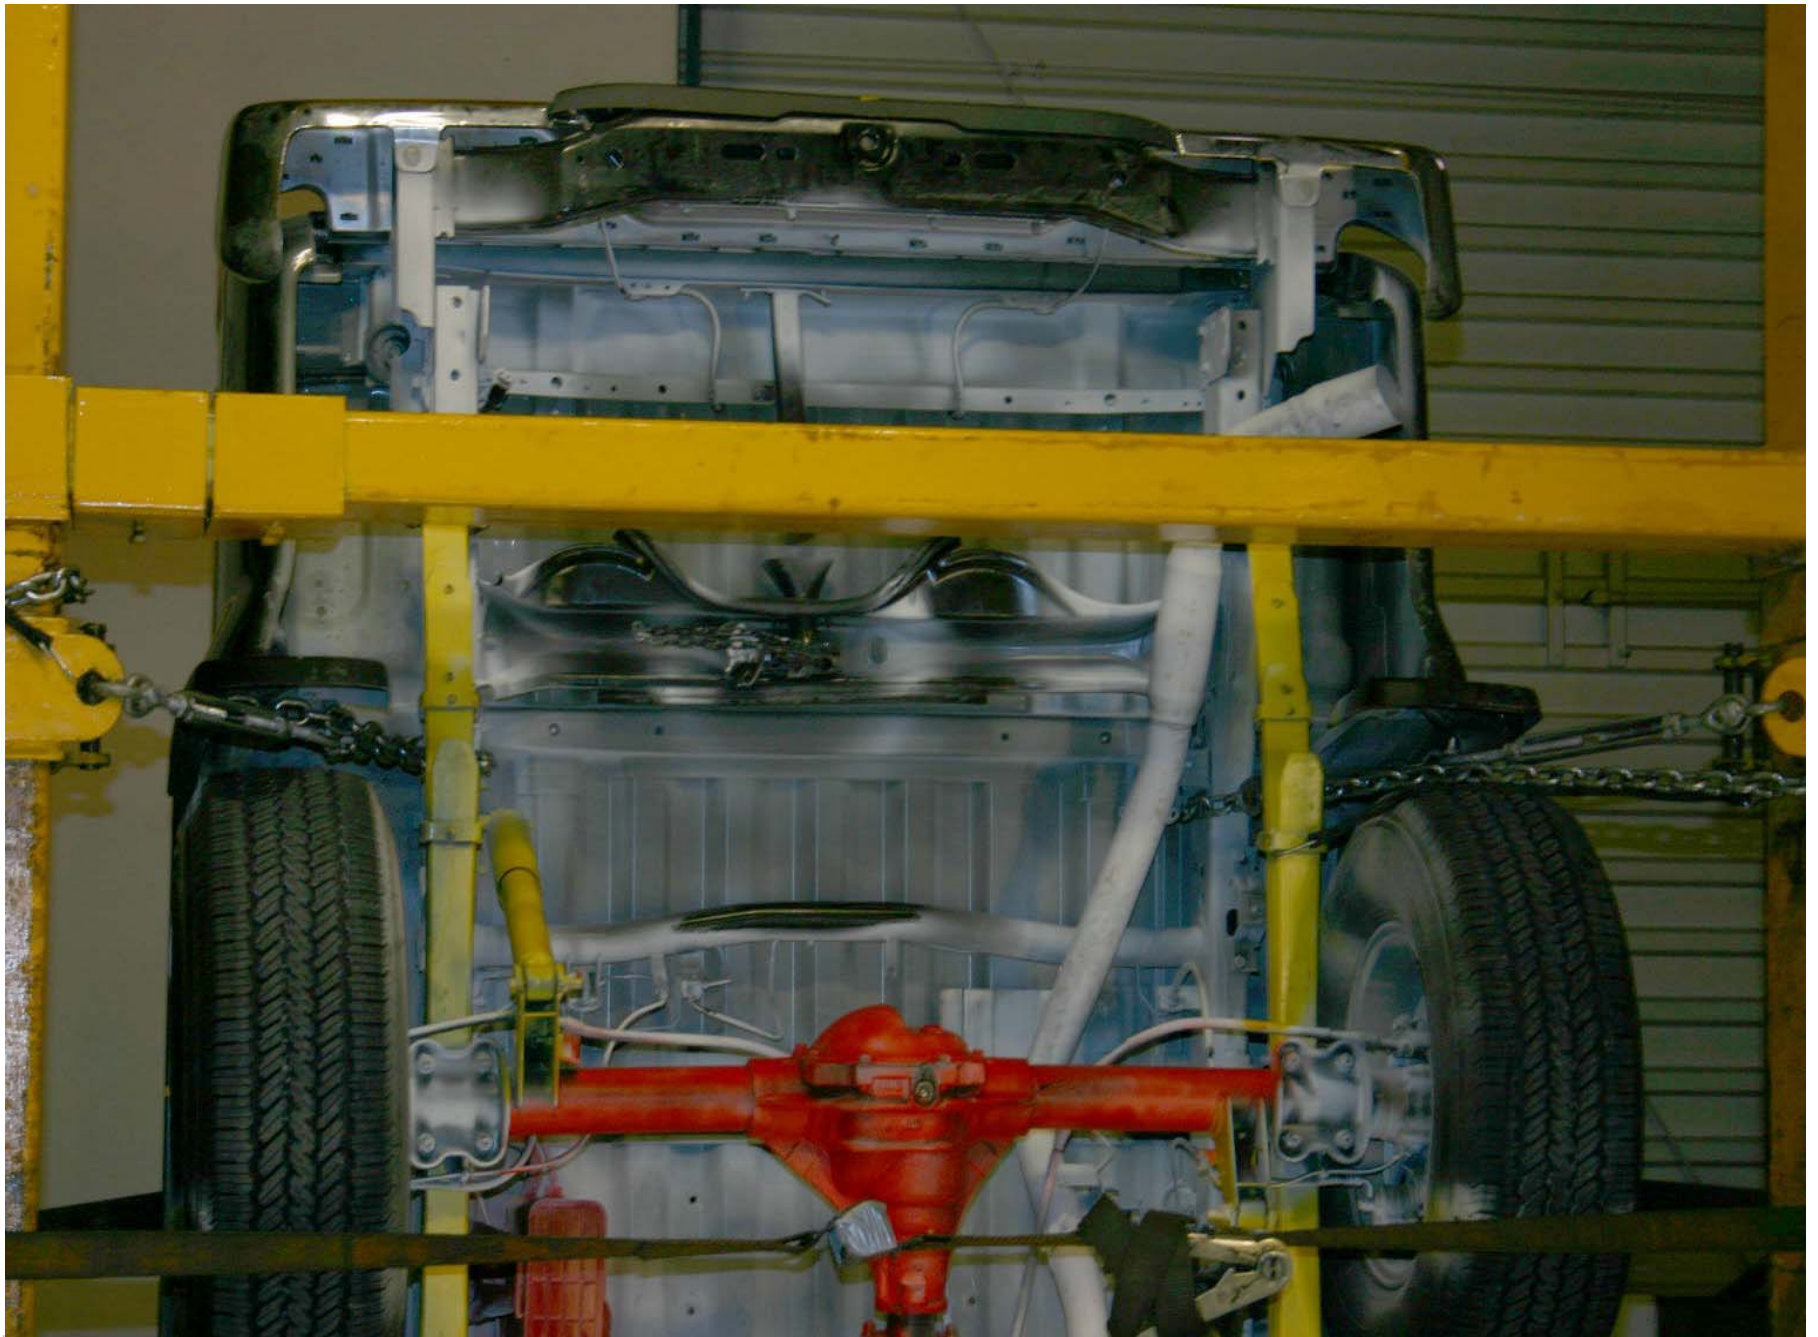

Post-Test Rear Underbody View

A-34.



Pre-Test Driver Dummy Front View (head position)

A-35.



Post-Test Driver Dummy Front View (head position)



Pre-Test Driver Dummy Position Left Side View



Post-Test Driver Dummy Position Left Side View



Pre-Test Driver Dummy Position Left Side View (Door Open)



Post-Test Driver Dummy Position Left Side View (Door Open)



Pre-Test Driver Dummy Seat Position



Post-Test Driver Dummy Seat Position



Pre-Test Driver Dummy Feet Position



Post-Test Driver Dummy Feet Position



Pre-Test Driver Side Knee Bolster View



Post-Test Driver Side Knee Bolster View



Pre-Test Driver Side Floor Pan View



Post-Test Driver Side Floor Pan View



Post-Test Driver Dummy Head Contact



Post-Test Driver Dummy Knee Contact



Post-Test Driver Dummy Airbag Contact

A-51.



Pre-Test Passenger Dummy Front View (head position)



Post-Test Passenger Dummy Front View (head position)

A-53.



Pre-Test Passenger Dummy Position Right Side View

A-54.



Post-Test Passenger Dummy Position Right Side View

A-55.



Pre-Test Passenger Dummy Position Right Side View (Door Open)



Post-Test Passenger Dummy Position Right Side View (Door Open)



Pre-Test Passenger Dummy Seat Position



Post-Test Passenger Dummy Seat Position



Pre-Test Passenger Dummy Feet Position




Post-Test Passenger Dummy Feet Position

A-61.



Pre-Test Passenger Side Knee Bolster View

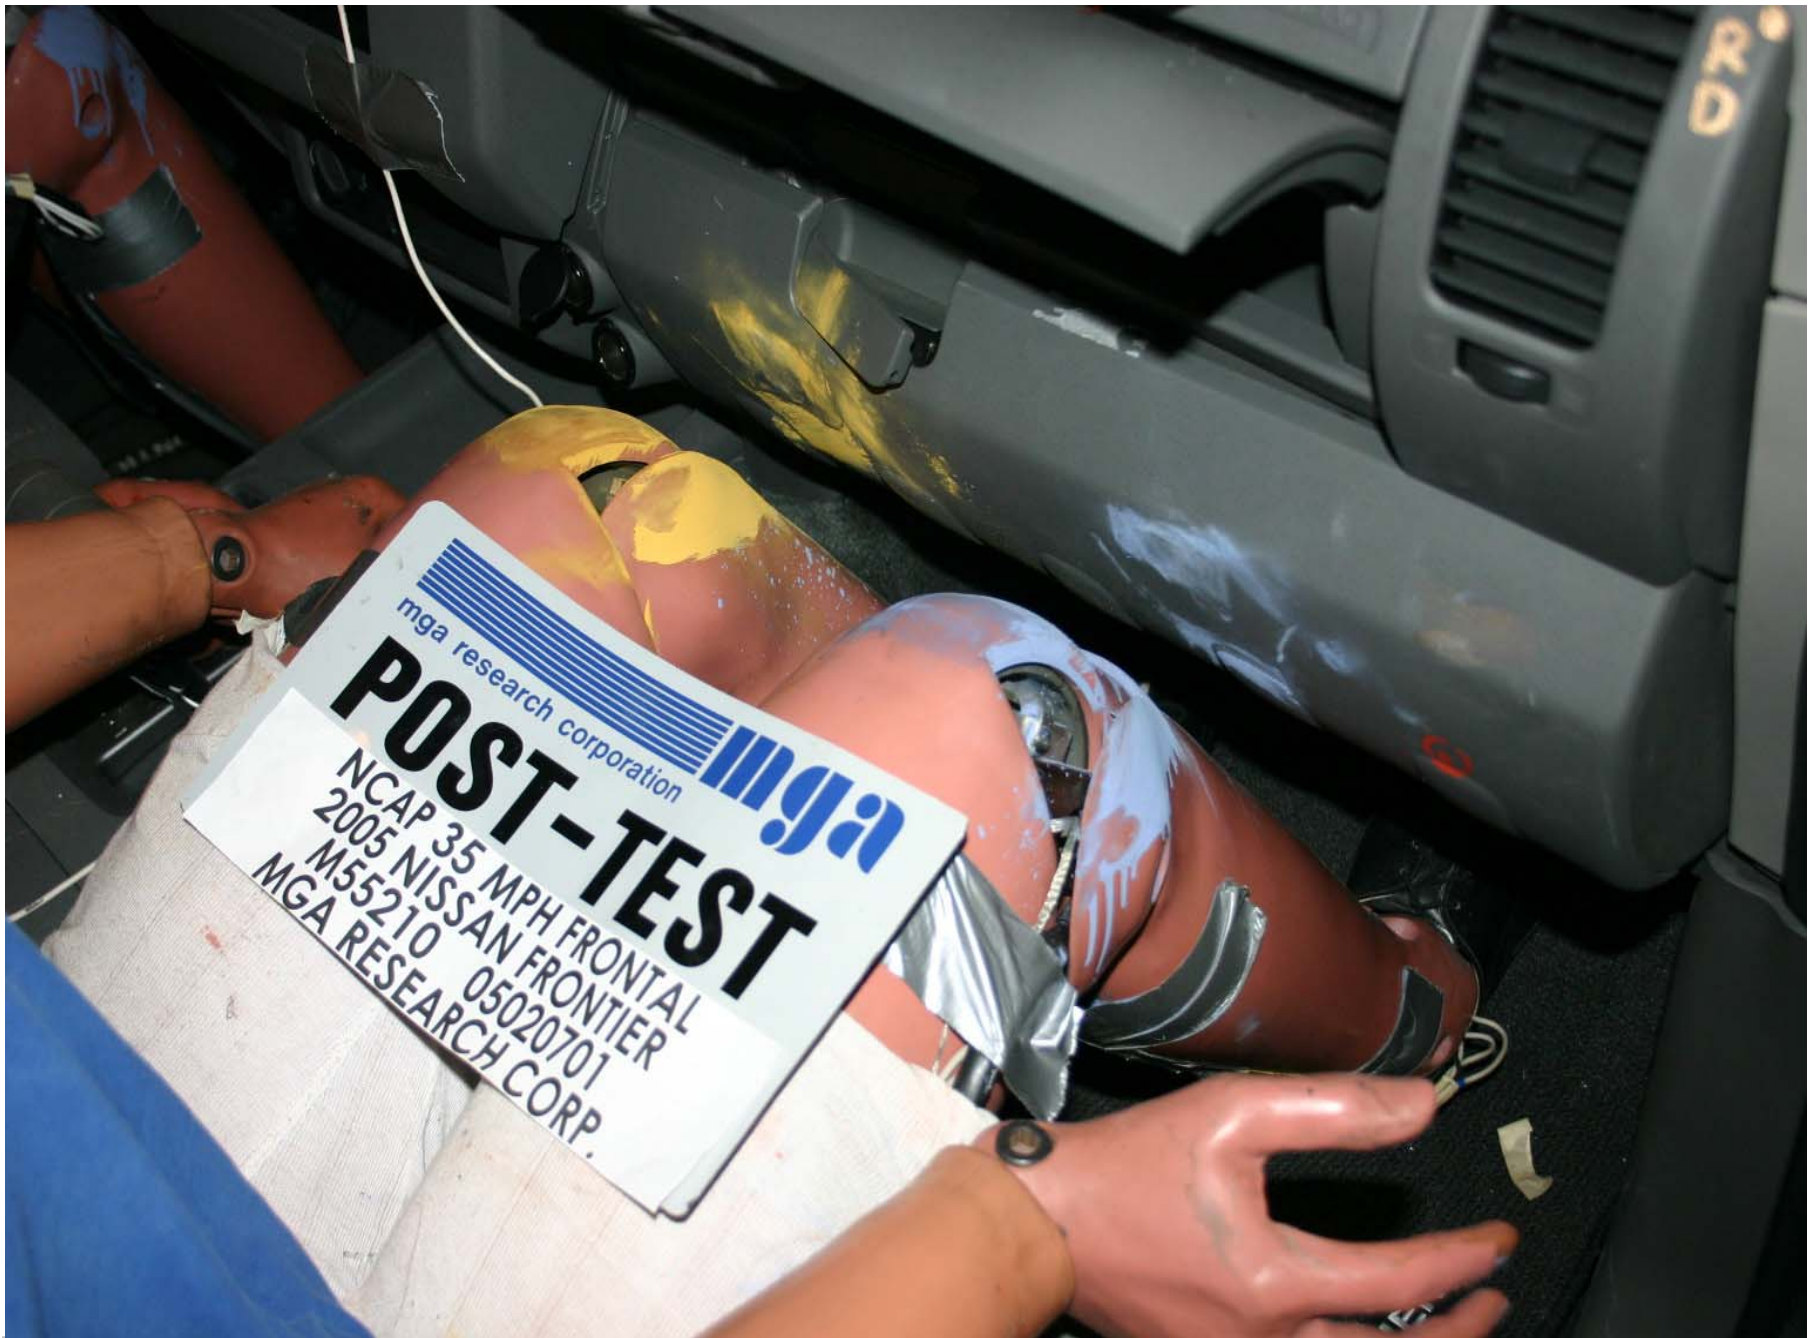

Post-Test Passenger Side Knee Bolster View



Pre-Test Passenger Side Floor Pan View



Post-Test Passenger Side Floor Pan View



Post-Test Passenger Dummy Head Contact

A-66.



Post-Test Passenger Dummy Head Contact (visor)



Post-Test Passenger Dummy Knee Contact




Post-Test Passenger Dummy Airbag Contact

A-69.



Rollover 90 Degrees

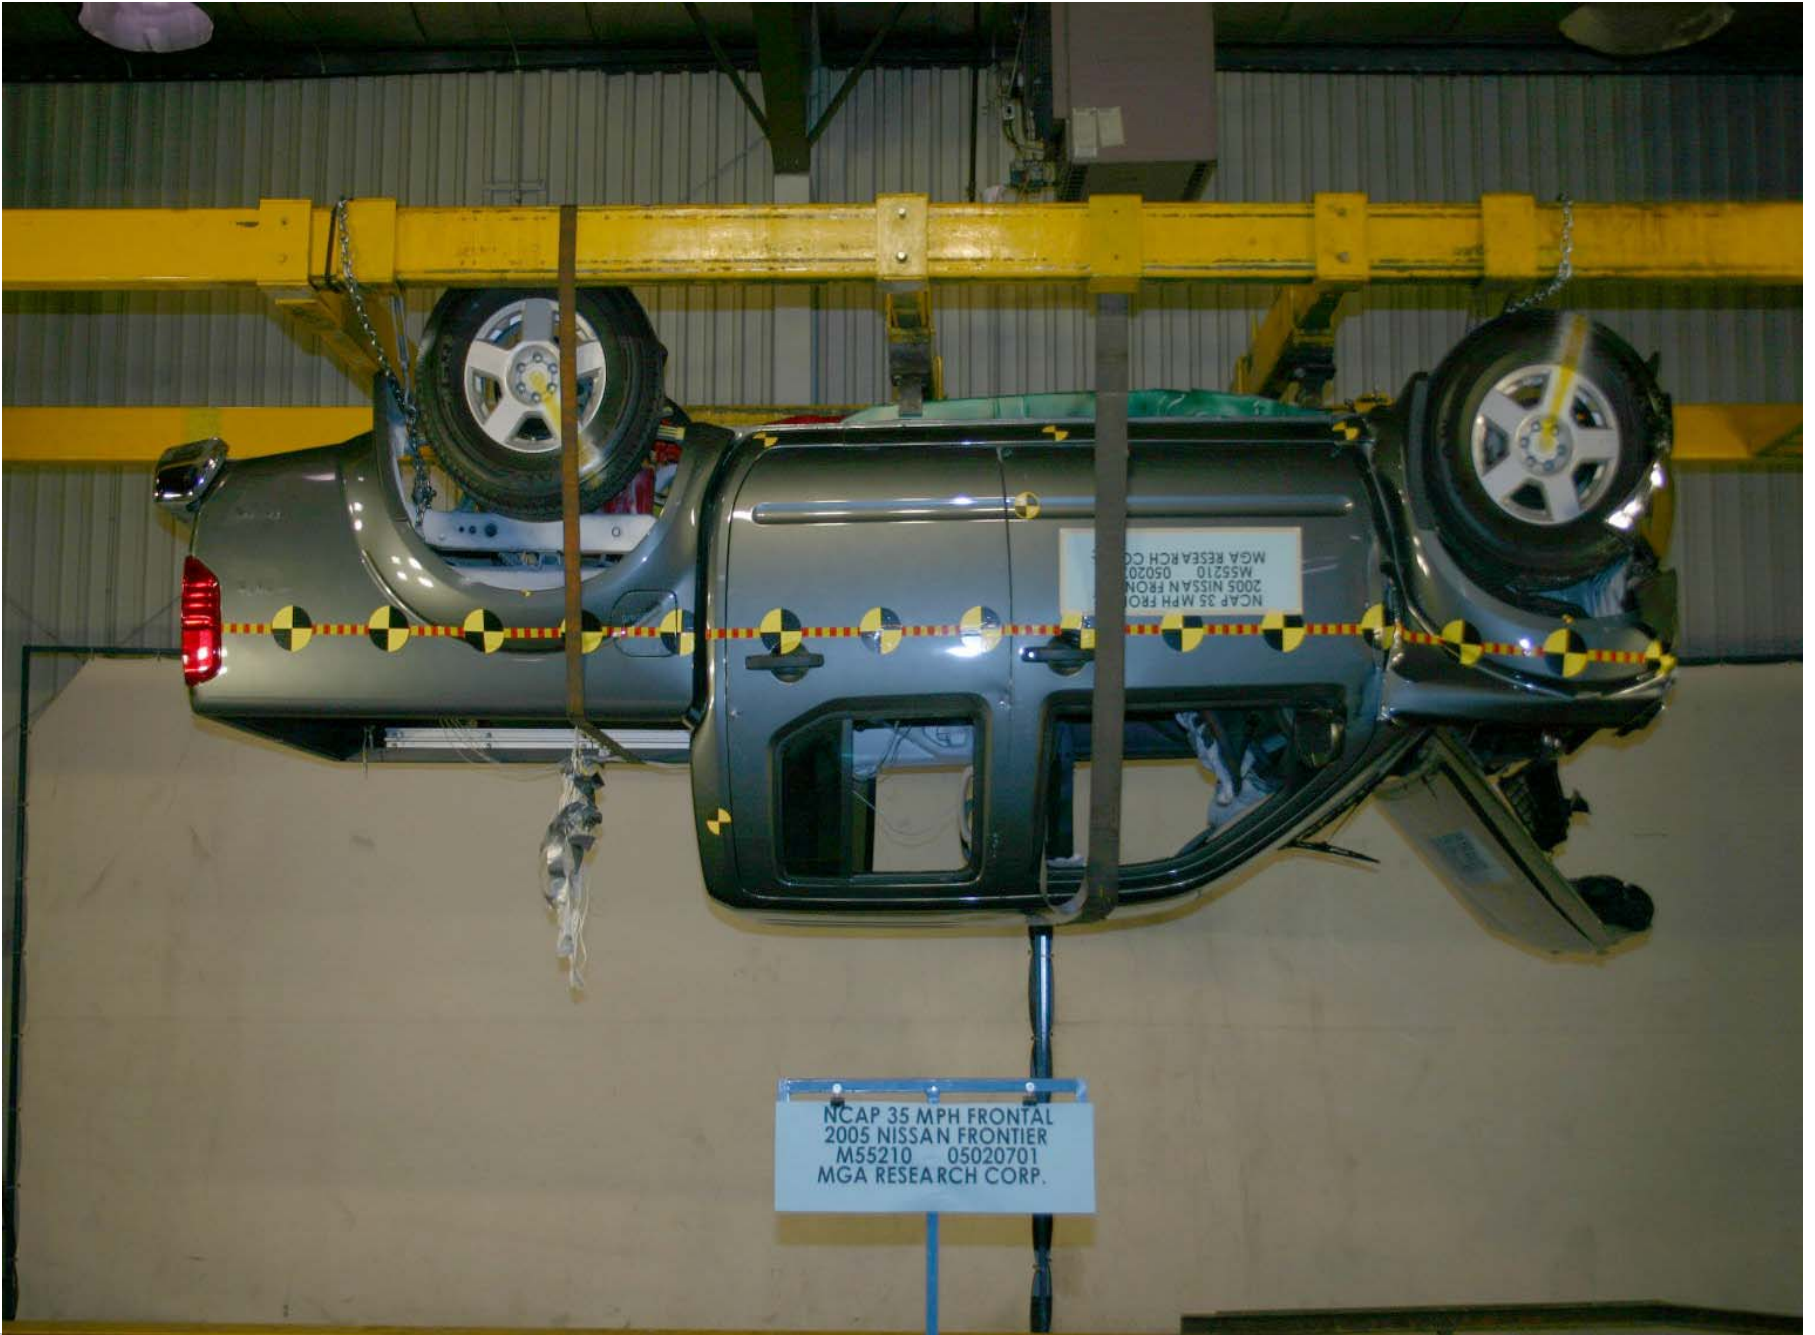

A-70.

Rollover 180 Degrees

A-71.




Rollover 270 Degrees



Rollover 360 Degrees

A-73.

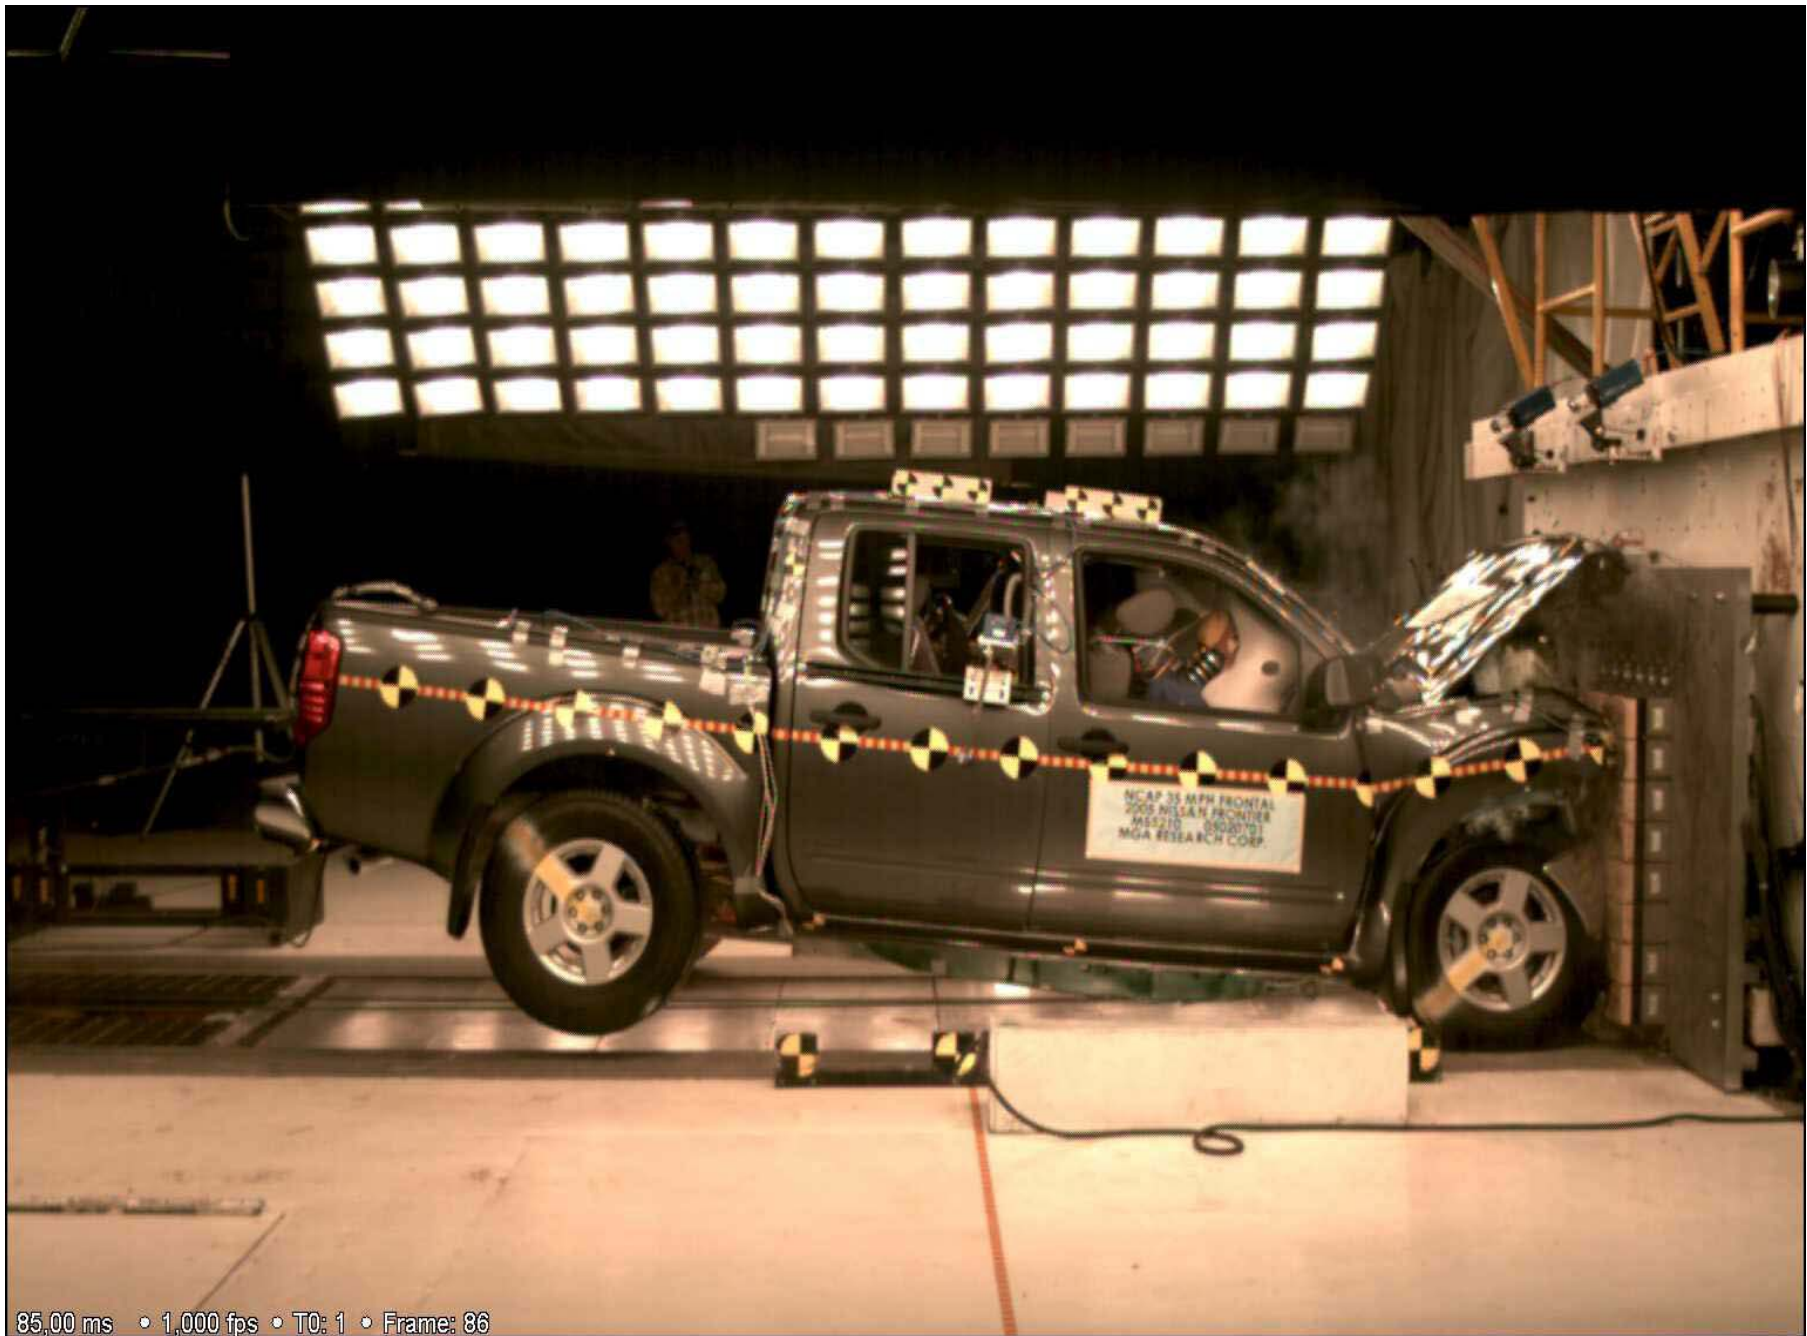

Vehicle Impact

**APPENDIX B**

**DUMMY AND VEHICLE RESPONSE DATA TRACES**

## TABLE OF DATA PLOTS

		<u>Page No.</u>
Figure No. 1.	Driver Head X Acceleration vs. Time	B-1
Figure No. 2.	Driver Head Y Acceleration vs. Time	B-1
Figure No. 3.	Driver Head Z Acceleration vs. Time	B-1
Figure No. 4.	Driver Head Resultant Acceleration vs. Time	B-1
Figure No. 5.	Driver Head X Velocity vs. Time	B-2
Figure No. 6.	Driver Head Y Velocity vs. Time	B-2
Figure No. 7.	Driver Head Z Velocity vs. Time	B-2
Figure No. 8.	Driver Head X Redundant Acceleration vs. Time	B-3
Figure No. 9.	Driver Head Y Redundant Acceleration vs. Time	B-3
Figure No. 10.	Driver Head Z Redundant Acceleration vs. Time	B-3
Figure No. 11.	Driver Head Resultant Redundant Acceleration vs. Time	B-3
Figure No. 12.	Driver Head X Redundant Velocity vs. Time	B-4
Figure No. 13.	Driver Head Y Redundant Velocity vs. Time	B-4
Figure No. 14.	Driver Head Z Redundant Velocity vs. Time	B-4
Figure No. 15.	Driver Neck Force X vs. Time	B-5
Figure No. 16.	Driver Neck Force Y vs. Time	B-5
Figure No. 17.	Driver Neck Force Z vs. Time	B-5
Figure No. 18.	Driver Neck Force Resultant vs. Time	B-5
Figure No. 19.	Driver Neck Moment X vs. Time	B-6
Figure No. 20.	Driver Neck Moment Y vs. Time	B-6
Figure No. 21.	Driver Neck Moment Z vs. Time	B-6
Figure No. 22.	Driver Neck Moment Resultant vs. Time	B-6
Figure No. 23.	Driver Chest X Acceleration vs. Time	B-7
Figure No. 24.	Driver Chest Y Acceleration vs. Time	B-7
Figure No. 25.	Driver Chest Z Acceleration vs. Time	B-7
Figure No. 26.	Driver Chest Resultant Acceleration vs. Time	B-7
Figure No. 27.	Driver Chest X Velocity vs. Time	B-8
Figure No. 28.	Driver Chest Y Velocity vs. Time	B-8
Figure No. 29.	Driver Chest Z Velocity vs. Time	B-8





		<u>Page No.</u>
Figure No. 30.	Driver Chest Displacement vs. Time	B-8
Figure No. 31.	Driver Chest X Redundant Acceleration vs. Time	B-9
Figure No. 32.	Driver Chest Y Redundant Acceleration vs. Time	B-9
Figure No. 33.	Driver Chest Z Redundant Acceleration vs. Time	B-9
Figure No. 34.	Driver Chest Resultant Redundant Acceleration vs. Time	B-9
Figure No. 35.	Driver Chest X Redundant Velocity vs. Time	B-10
Figure No. 36.	Driver Chest Y Redundant Velocity vs. Time	B-10
Figure No. 37.	Driver Chest Z Redundant Velocity vs. Time	B-10
Figure No. 38.	Driver Pelvis X Acceleration vs. Time	B-11
Figure No. 39.	Driver Pelvis Y Acceleration vs. Time	B-11
Figure No. 40.	Driver Pelvis Z Acceleration vs. Time	B-11
Figure No. 41.	Driver Pelvis Resultant Acceleration vs. Time	B-11
Figure No. 42.	Driver Pelvis X Velocity vs. Time	B-12
Figure No. 43.	Driver Pelvis Y Velocity vs. Time	B-12
Figure No. 44.	Driver Pelvis Z Velocity vs. Time	B-12
Figure No. 45.	Driver Left Femur Force vs. Time	B-13
Figure No. 46.	Driver Right Femur Force vs. Time	B-13
Figure No. 47.	Driver Shoulder Belt Force vs. Time	B-13
Figure No. 48.	Driver Lap Belt Force vs. Time	B-13
Figure No. 49.	Driver Left Upper Tibia Moment X vs. Time	B-14
Figure No. 50.	Driver Left Upper Tibia Moment Y vs. Time	B-14
Figure No. 51.	Driver Left Upper Tibia Force Z vs. Time	B-14
Figure No. 52.	Driver Left Lower Tibia Moment X vs. Time	B-15
Figure No. 53.	Driver Left Lower Tibia Moment Y vs. Time	B-15
Figure No. 54.	Driver Left Lower Tibia Force Z vs. Time	B-15
Figure No. 55.	Driver Right Upper Tibia Moment X vs. Time	B-16
Figure No. 56.	Driver Right Upper Tibia Moment Y vs. Time	B-16
Figure No. 57.	Driver Right Upper Tibia Force Z vs. Time	B-16
Figure No. 58.	Driver Right Lower Tibia Moment X vs. Time	B-17
Figure No. 59.	Driver Right Lower Tibia Moment Y vs. Time	B-17




		<u>Page No.</u>
Figure No. 60.	Driver Right Lower Tibia Force Z vs. Time	B-17
Figure No. 61.	Driver Left Foot Z – Front Acceleration vs. Time	B-18
Figure No. 62.	Driver Left Ankle X Acceleration vs. Time	B-18
Figure No. 63.	Driver Left Ankle Z Acceleration vs. Time	B-18
Figure No. 64.	Driver Right Foot Z – Front Acceleration vs. Time	B-19
Figure No. 65.	Driver Right Ankle X Acceleration vs. Time	B-19
Figure No. 66.	Driver Right Ankle Z Acceleration vs. Time	B-19
Figure No. 67.	Passenger Head X Acceleration vs. Time	B-20
Figure No. 68.	Passenger Head Y Acceleration vs. Time	B-20
Figure No. 69.	Passenger Head Z Acceleration vs. Time	B-20
Figure No. 70.	Passenger Head Resultant Acceleration vs. Time	B-20
Figure No. 71.	Passenger Head X Velocity vs. Time	B-21
Figure No. 72.	Passenger Head Y Velocity vs. Time	B-21
Figure No. 73.	Passenger Head Z Velocity vs. Time	B-21
Figure No. 74.	Passenger Head X Redundant Acceleration vs. Time	B-22
Figure No. 75.	Passenger Head Y Redundant Acceleration vs. Time	B-22
Figure No. 76.	Passenger Head Z Redundant Acceleration vs. Time	B-22
Figure No. 77.	Passenger Head Resultant Redundant Acceleration vs. Time	B-22
Figure No. 78.	Passenger Head X Redundant Velocity vs. Time	B-23
Figure No. 79.	Passenger Head Y Redundant Velocity vs. Time	B-23
Figure No. 80.	Passenger Head Z Redundant Velocity vs. Time	B-23
Figure No. 81.	Passenger Neck Force X vs. Time	B-24
Figure No. 82.	Passenger Neck Force Y vs. Time	B-24
Figure No. 83.	Passenger Neck Force Z vs. Time	B-24
Figure No. 84.	Passenger Neck Force Resultant vs. Time	B-24
Figure No. 85.	Passenger Neck Moment X vs. Time	B-25
Figure No. 86.	Passenger Neck Moment Y vs. Time	B-25
Figure No. 87.	Passenger Neck Moment Z vs. Time	B-25
Figure No. 88.	Passenger Neck Moment Resultant vs. Time	B-25
Figure No. 89.	Passenger Chest X Acceleration vs. Time	B-26





		<u>Page No.</u>
Figure No. 90.	Passenger Chest Y Acceleration vs. Time	B-26
Figure No. 91.	Passenger Chest Z Acceleration vs. Time	B-26
Figure No. 92.	Passenger Chest Resultant Acceleration vs. Time	B-26
Figure No. 93.	Passenger Chest X Velocity vs. Time	B-27
Figure No. 94.	Passenger Chest Y Velocity vs. Time	B-27
Figure No. 95.	Passenger Chest Z Velocity vs. Time	B-27
Figure No. 96.	Passenger Chest Displacement vs. Time	B-27
Figure No. 97.	Passenger Chest X Redundant Acceleration vs. Time	B-28
Figure No. 98.	Passenger Chest Y Redundant Acceleration vs. Time	B-28
Figure No. 99.	Passenger Chest Z Redundant Acceleration vs. Time	B-28
Figure No. 100.	Passenger Chest Resultant Redundant Acceleration vs. Time	B-28
Figure No. 101.	Passenger Chest X Redundant Velocity vs. Time	B-29
Figure No. 102.	Passenger Chest Y Redundant Velocity vs. Time	B-29
Figure No. 103.	Passenger Chest Z Redundant Velocity vs. Time	B-29
Figure No. 104.	Passenger Pelvis X Acceleration vs. Time	B-30
Figure No. 105.	Passenger Pelvis Y Acceleration vs. Time	B-30
Figure No. 106.	Passenger Pelvis Z Acceleration vs. Time	B-30
Figure No. 107.	Passenger Pelvis Resultant Acceleration vs. Time	B-30
Figure No. 108.	Passenger Pelvis X Velocity vs. Time	B-31
Figure No. 109.	Passenger Pelvis Y Velocity vs. Time	B-31
Figure No. 110.	Passenger Pelvis Z Velocity vs. Time	B-31
Figure No. 111.	Passenger Left Femur Force vs. Time	B-32
Figure No. 112.	Passenger Right Femur Force vs. Time	B-32
Figure No. 113.	Passenger Shoulder Belt Force vs. Time	B-32
Figure No. 114.	Passenger Lap Belt Force vs. Time	B-32
Figure No. 115.	Passenger Left Upper Tibia Moment X vs. Time	B-33
Figure No. 116.	Passenger Left Upper Tibia Moment Y vs. Time	B-33
Figure No. 117.	Passenger Left Upper Tibia Force X vs. Time	B-33
Figure No. 118.	Passenger Left Upper Tibia Force Z vs. Time	B-33
Figure No. 119.	Passenger Left Lower Tibia Moment X vs. Time	B-34




	<u>Page No.</u>	
Figure No. 120.	Passenger Left Lower Tibia Moment Y vs. Time	B-34
Figure No. 121.	Passenger Left Lower Tibia Force X vs. Time	B-34
Figure No. 122.	Passenger Left Lower Tibia Force Z vs. Time	B-34
Figure No. 123.	Passenger Right Upper Tibia Moment X vs. Time	B-35
Figure No. 124.	Passenger Right Upper Tibia Moment Y vs. Time	B-35
Figure No. 125.	Passenger Right Upper Tibia Force X vs. Time	B-35
Figure No. 126.	Passenger Right Upper Tibia Force Z vs. Time	B-35
Figure No. 127.	Passenger Right Lower Tibia Moment X vs. Time	B-36
Figure No. 128.	Passenger Right Lower Tibia Moment Y vs. Time	B-36
Figure No. 129.	Passenger Right Lower Tibia Force X vs. Time	B-36
Figure No. 130.	Passenger Right Lower Tibia Force Z vs. Time	B-36
Figure No. 131.	Passenger Left Foot Z – Front Acceleration vs. Time	B-37
Figure No. 132.	Passenger Left Ankle X Acceleration vs. Time	B-37
Figure No. 133.	Passenger Left Ankle Z Acceleration vs. Time	B-37
Figure No. 134.	Passenger Right Foot Z – Front Acceleration vs. Time	B-38
Figure No. 135.	Passenger Right Ankle X Acceleration vs. Time	B-38
Figure No. 136.	Passenger Right Ankle Z Acceleration vs. Time	B-38
Figure No. 137.	Left Rear Seat Crossmember X Acceleration vs. Time	B-39
Figure No. 138.	Left Rear Seat Crossmember X Velocity vs. Time	B-39
Figure No. 139.	Left Rear Seat Crossmember X Displacement vs. Time	B-39
Figure No. 140.	Left Rear Seat Crossmember Z Acceleration vs. Time	B-40
Figure No. 141.	Left Rear Seat Crossmember Z Velocity vs. Time	B-40
Figure No. 142.	Left Rear Seat Crossmember Z Displacement vs. Time	B-40
Figure No. 143.	Right Rear Seat Crossmember X Acceleration vs. Time	B-41
Figure No. 144.	Right Rear Seat Crossmember X Velocity vs. Time	B-41
Figure No. 145.	Right Rear Seat Crossmember X Displacement vs. Time	B-41
Figure No. 146.	Right Rear Seat Crossmember Z Acceleration vs. Time	B-42
Figure No. 147.	Right Rear Seat Crossmember Z Velocity vs. Time	B-42
Figure No. 148.	Right Rear Seat Crossmember Z Displacement vs. Time	B-42
Figure No. 149.	Top of Engine X Acceleration vs. Time	B-43





		<u>Page No.</u>
Figure No. 150.	Top of Engine X Velocity vs. Time	B-43
Figure No. 151.	Top of Engine X Displacement vs. Time	B-43
Figure No. 152.	Bottom of Engine X Acceleration vs. Time	B-44
Figure No. 153.	Bottom of Engine X Velocity vs. Time	B-44
Figure No. 154.	Bottom of Engine X Displacement vs. Time	B-44
Figure No. 155.	Left Brake Caliper X Acceleration vs. Time	B-45
Figure No. 156.	Left Brake Caliper X Velocity vs. Time	B-45
Figure No. 157.	Left Brake Caliper X Displacement vs. Time	B-45
Figure No. 158.	Right Brake Caliper X Acceleration vs. Time	B-46
Figure No. 159.	Right Brake Caliper X Velocity vs. Time	B-46
Figure No. 160.	Right Brake Caliper X Displacement vs. Time	B-46
Figure No. 161.	Instrument Panel X Acceleration vs. Time	B-47
Figure No. 162.	Instrument Panel X Velocity vs. Time	B-47
Figure No. 163.	Instrument Panel X Displacement vs. Time	B-47
Figure No. 164.	Barrier – Rows 1 to 9 Forces vs. Time	B-48
Figure No. 165.	Barrier – Total Force vs. Time	B-48

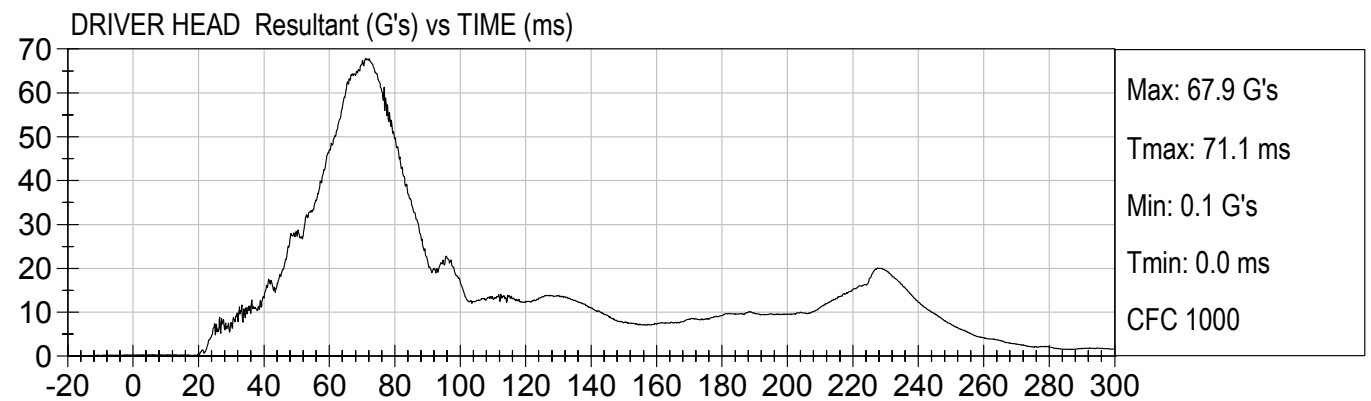
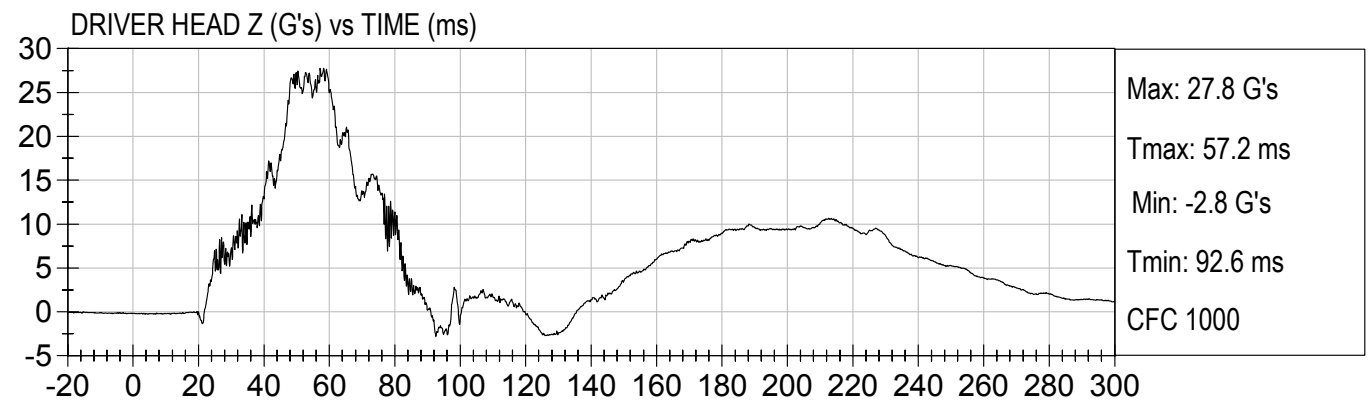
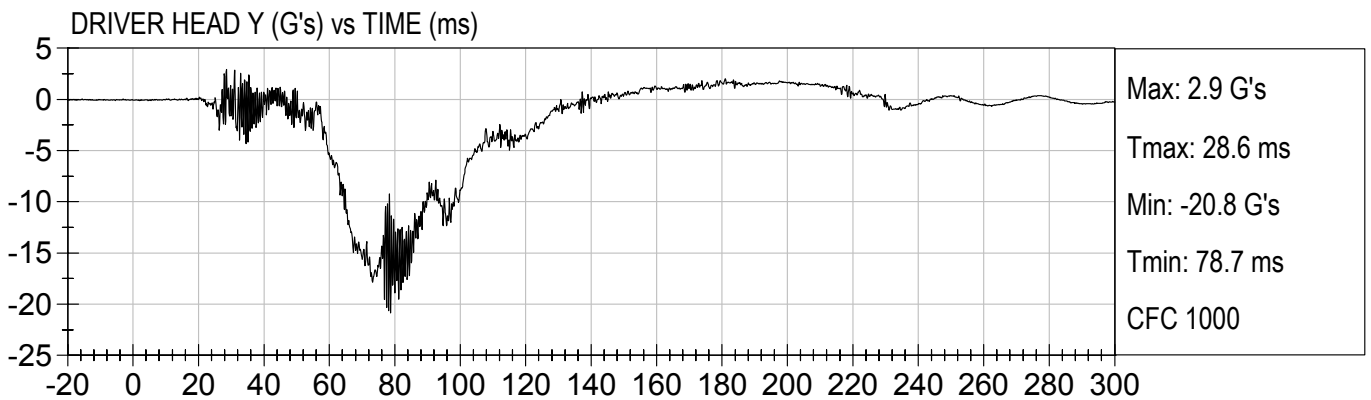
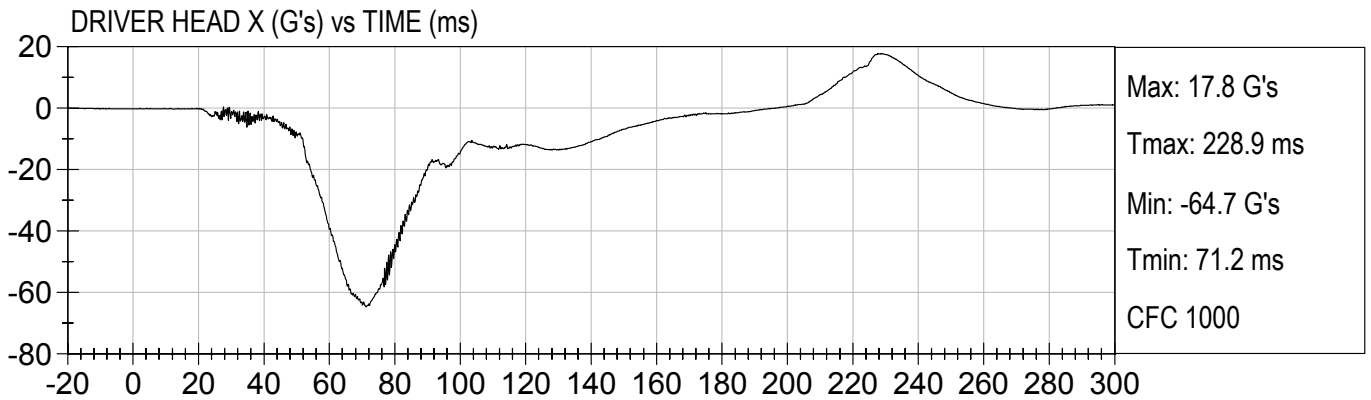



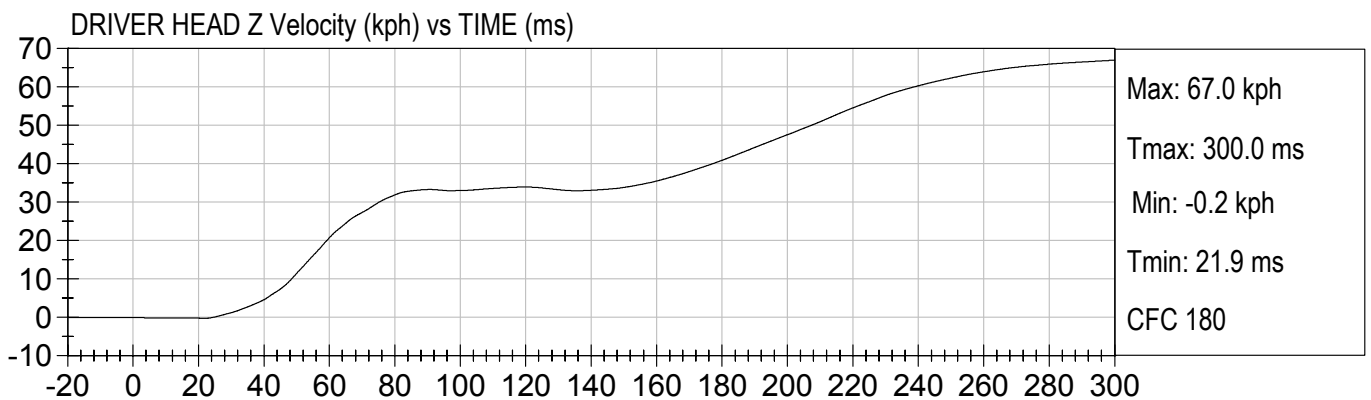
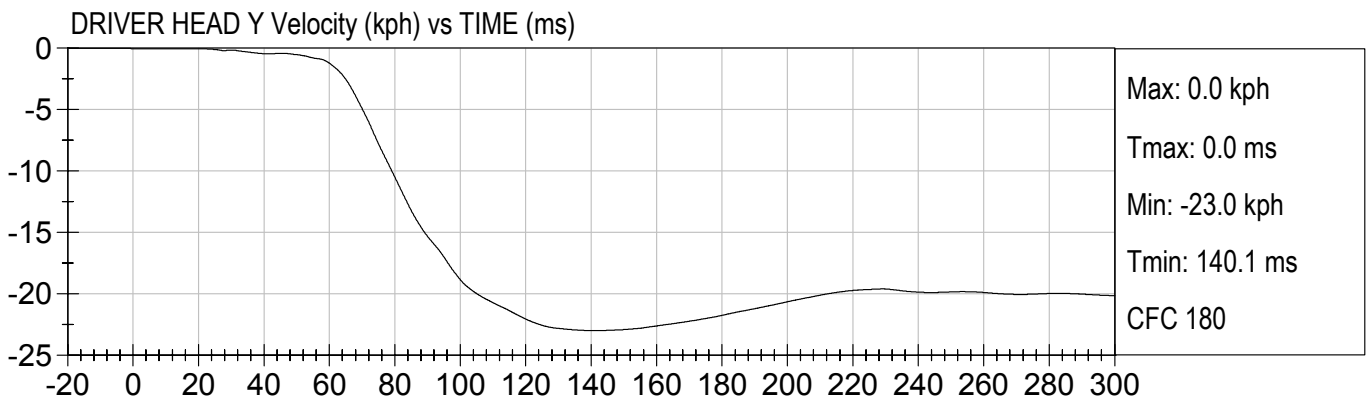
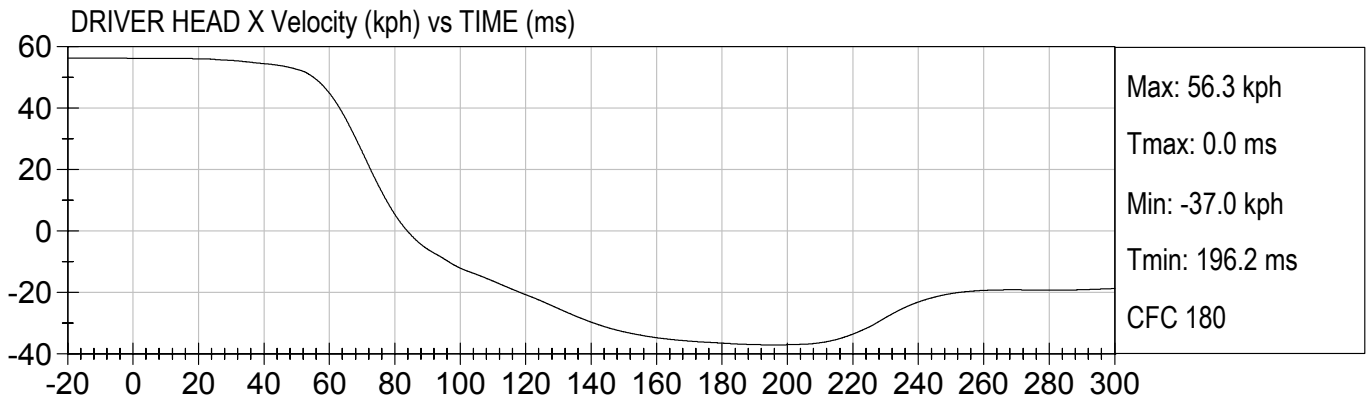


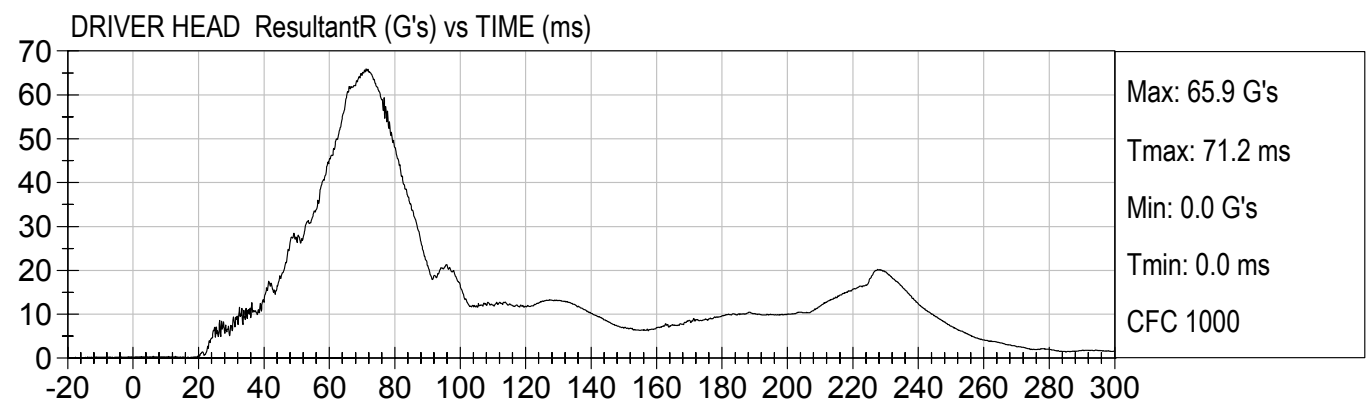
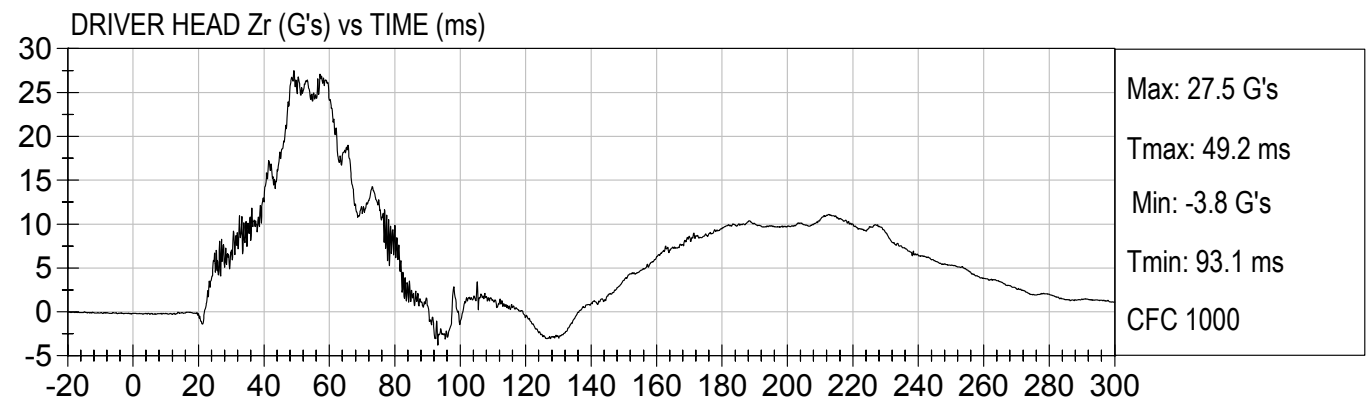
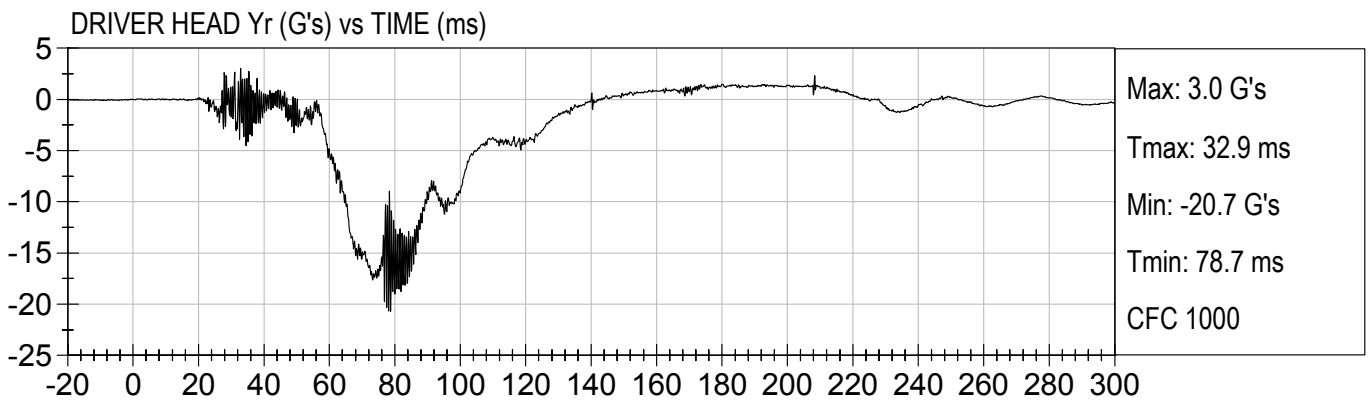
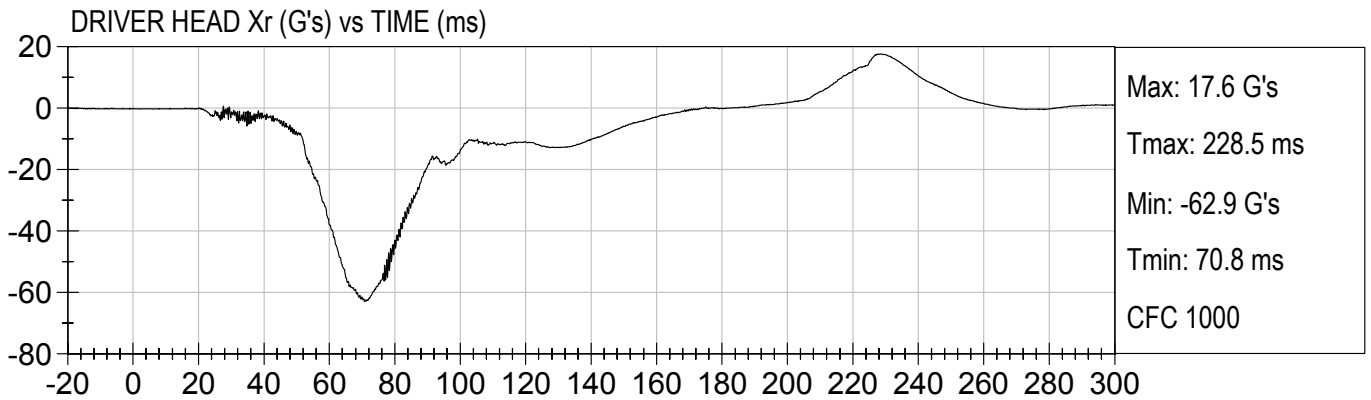



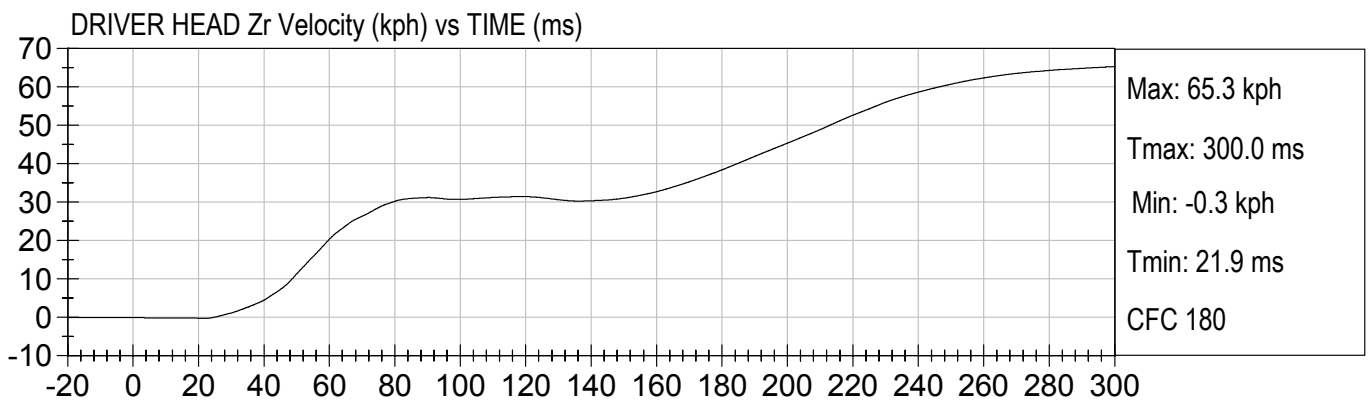
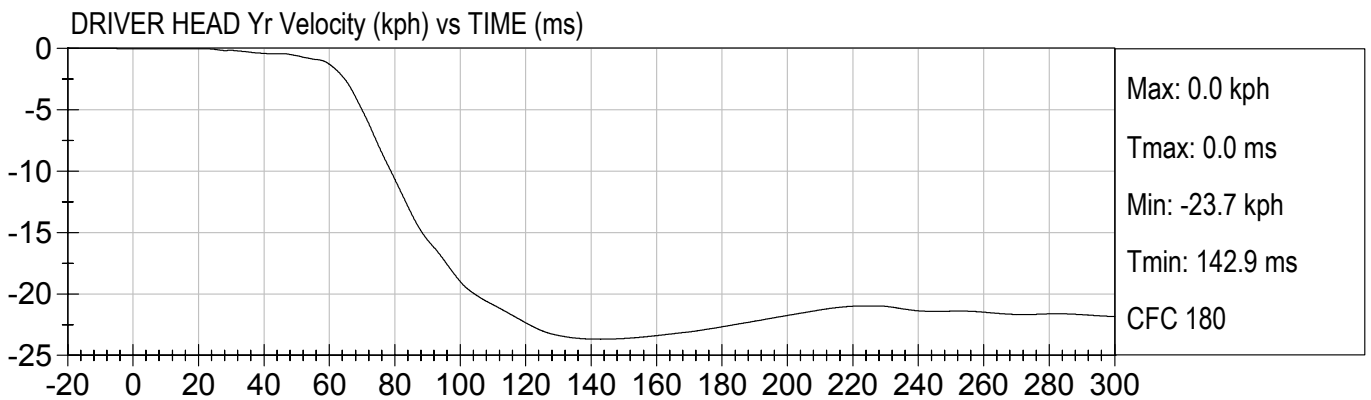
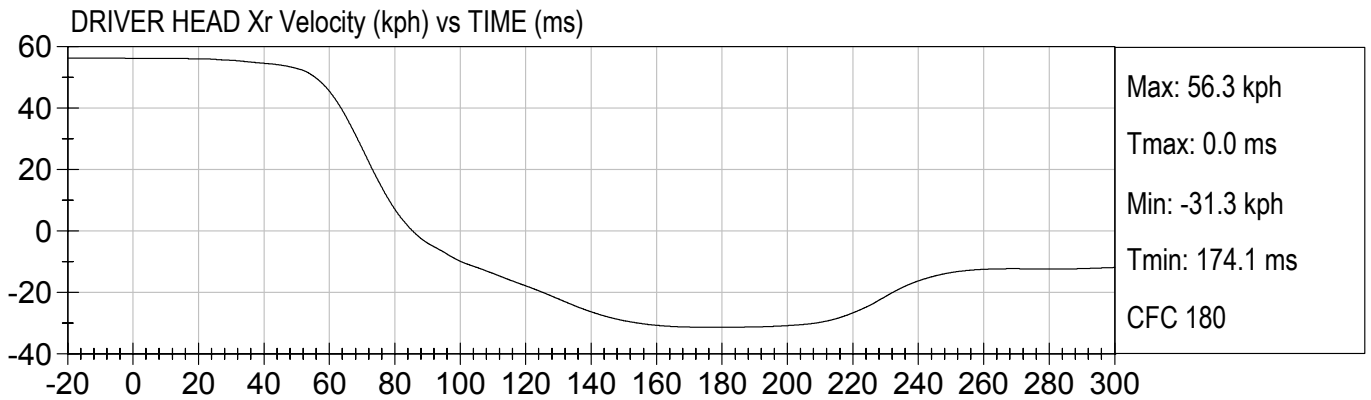


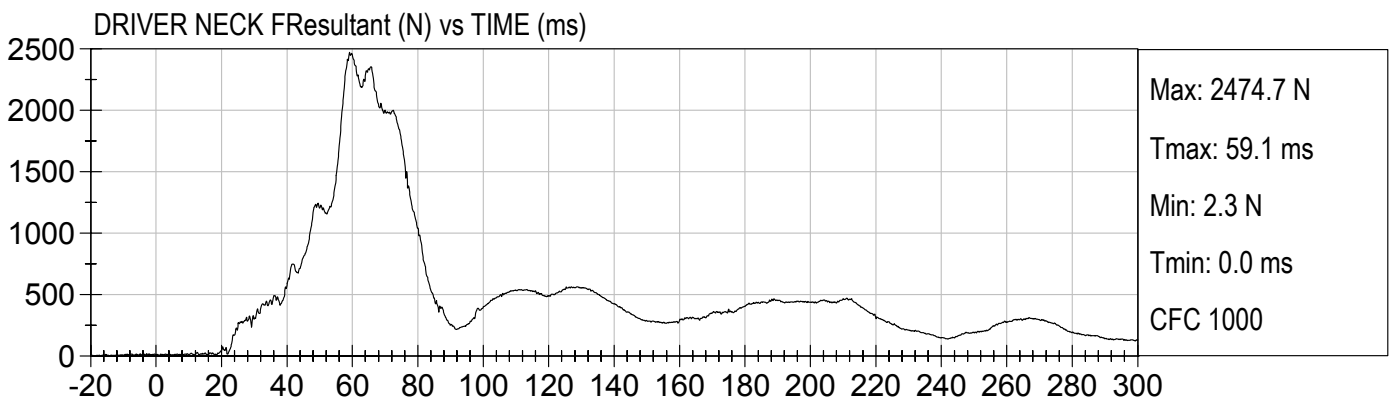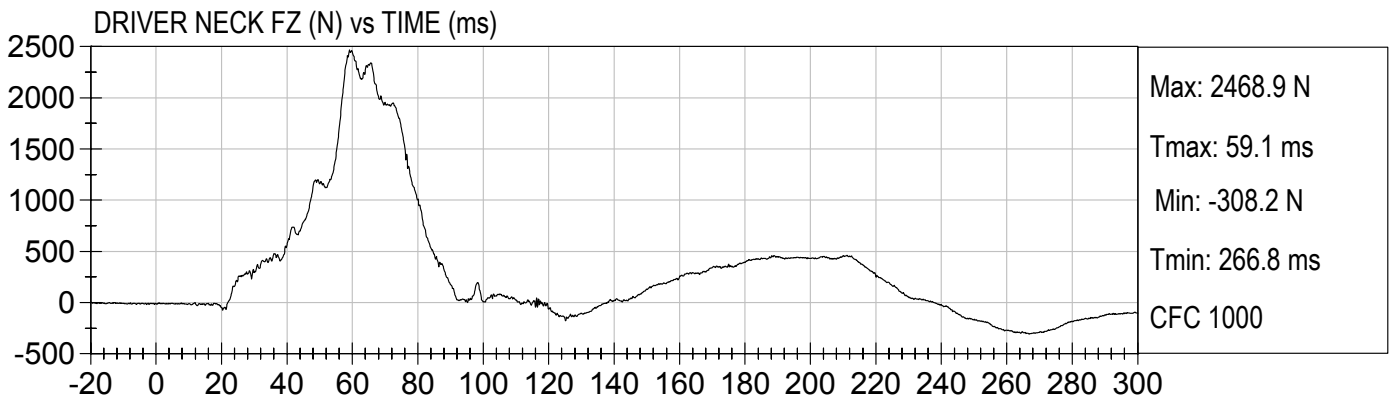
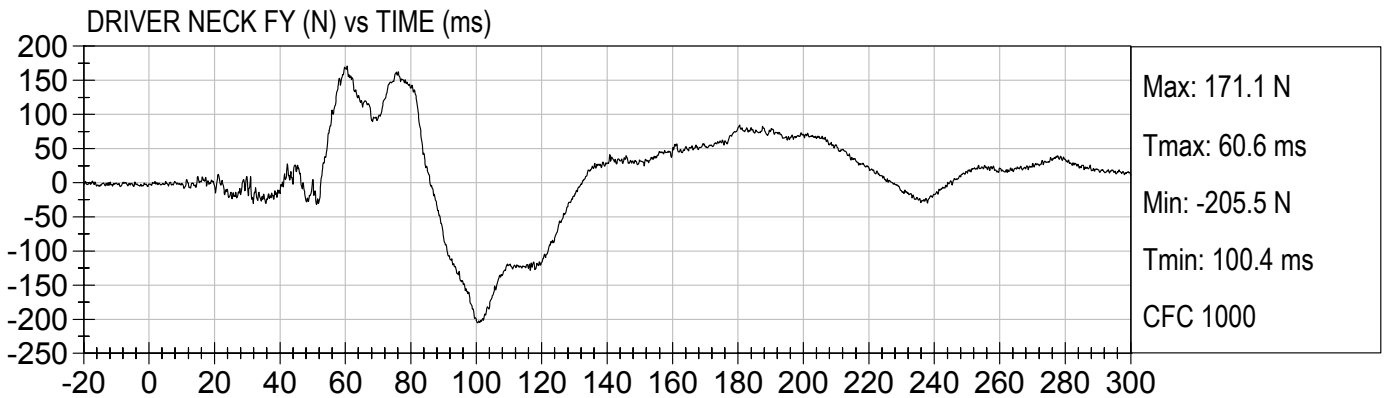
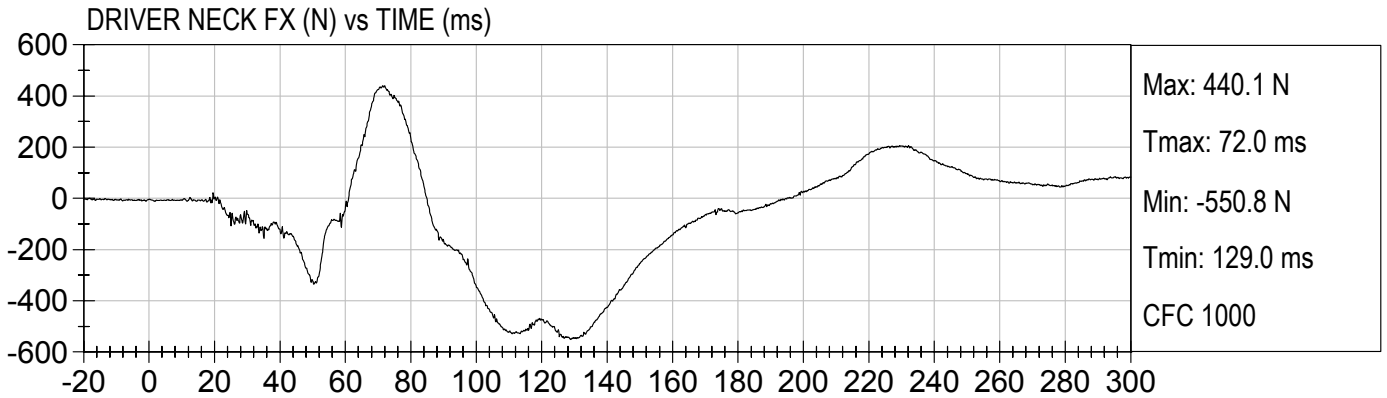


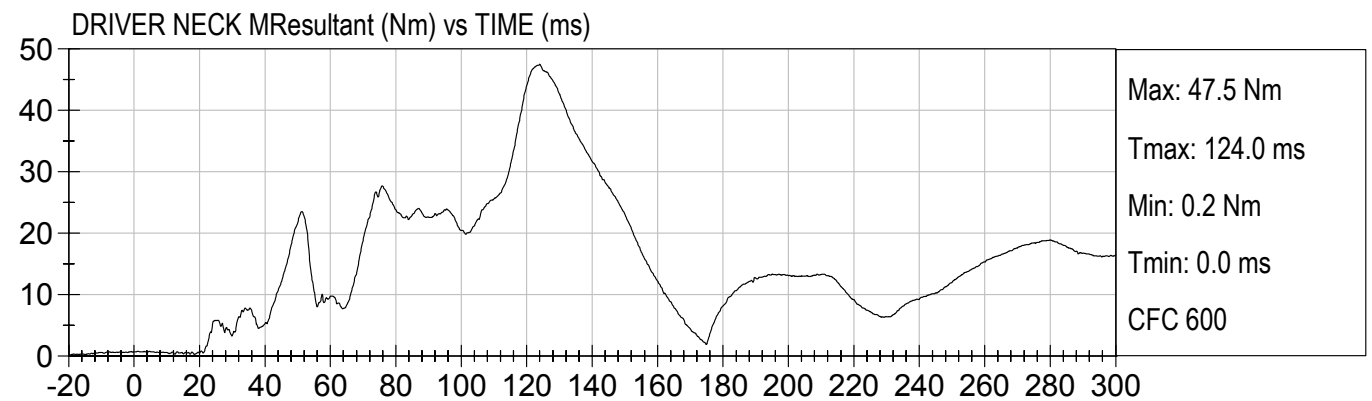
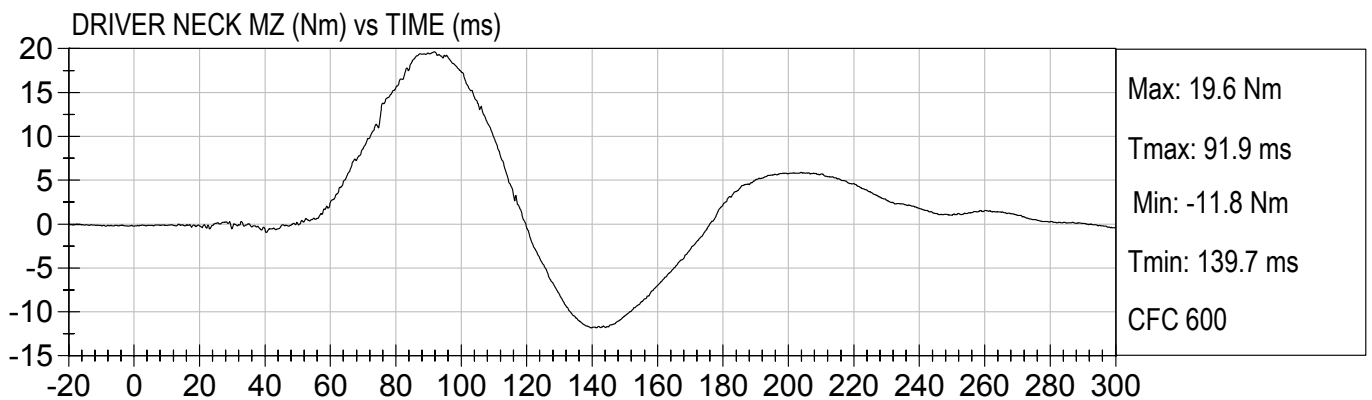
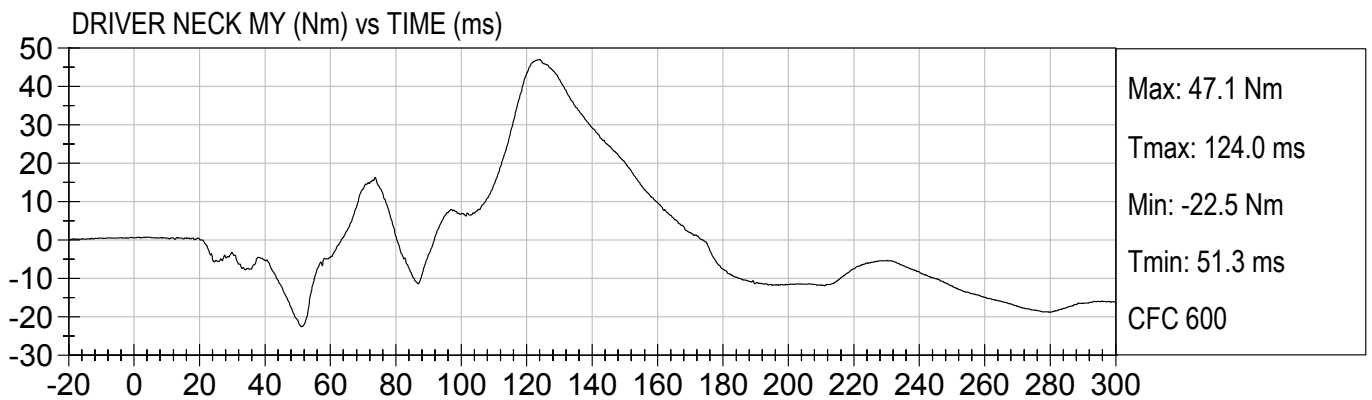
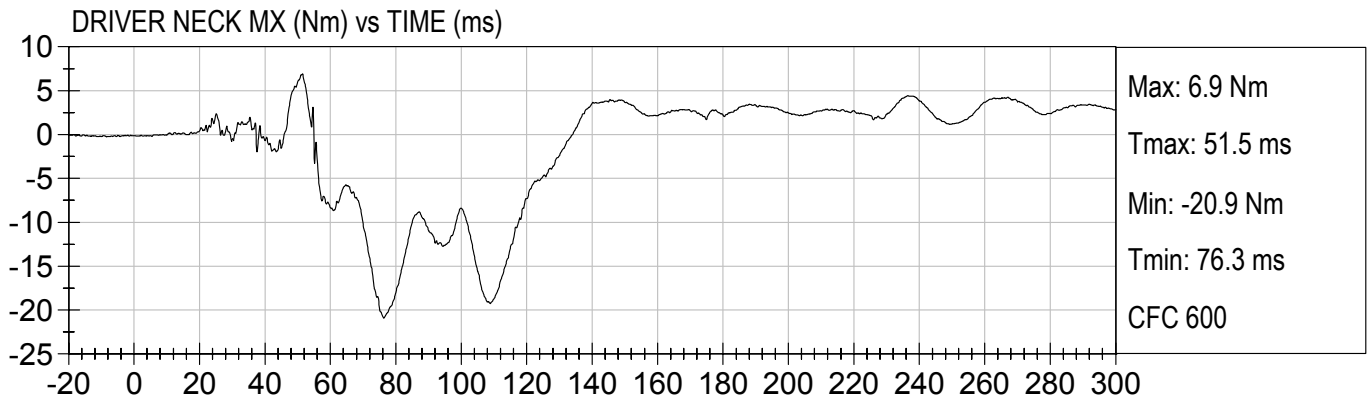


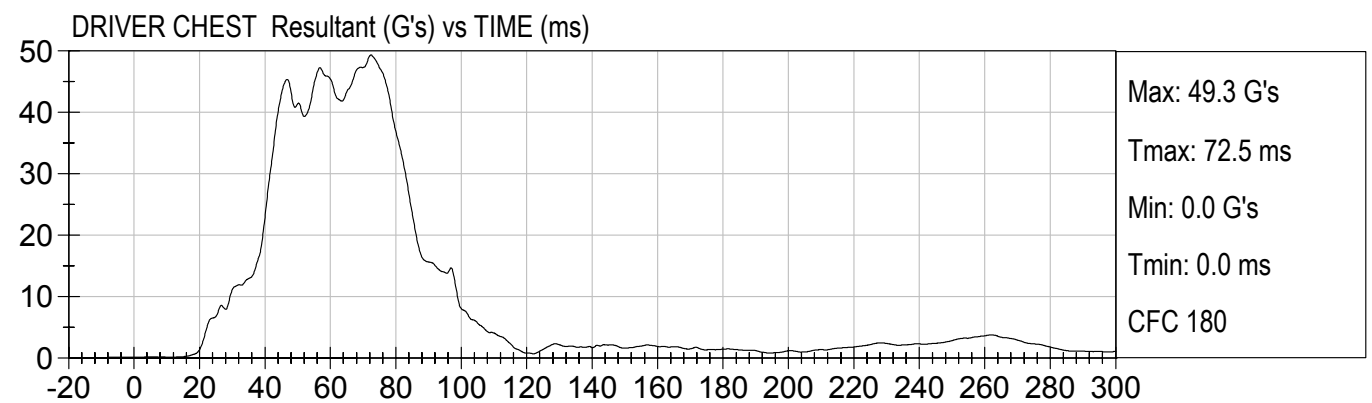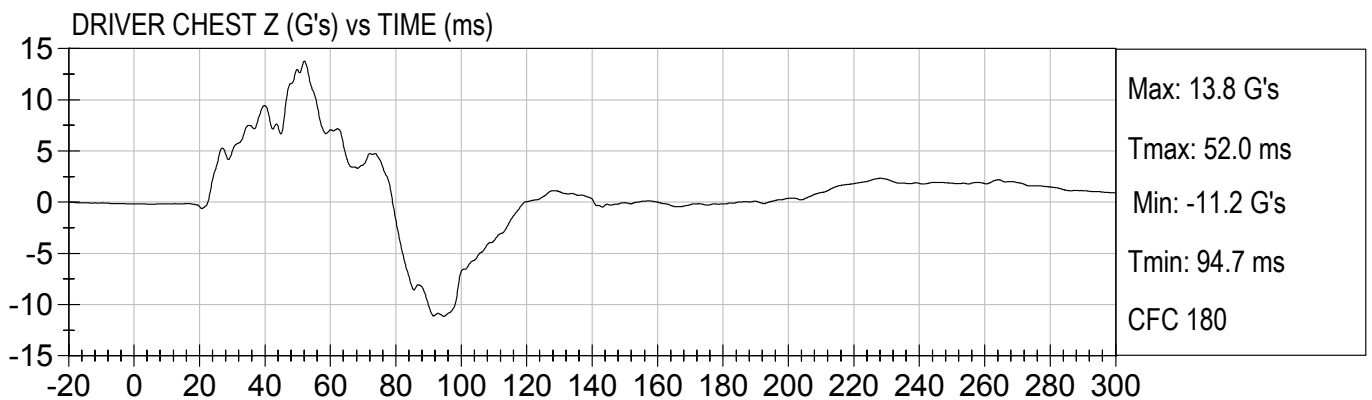
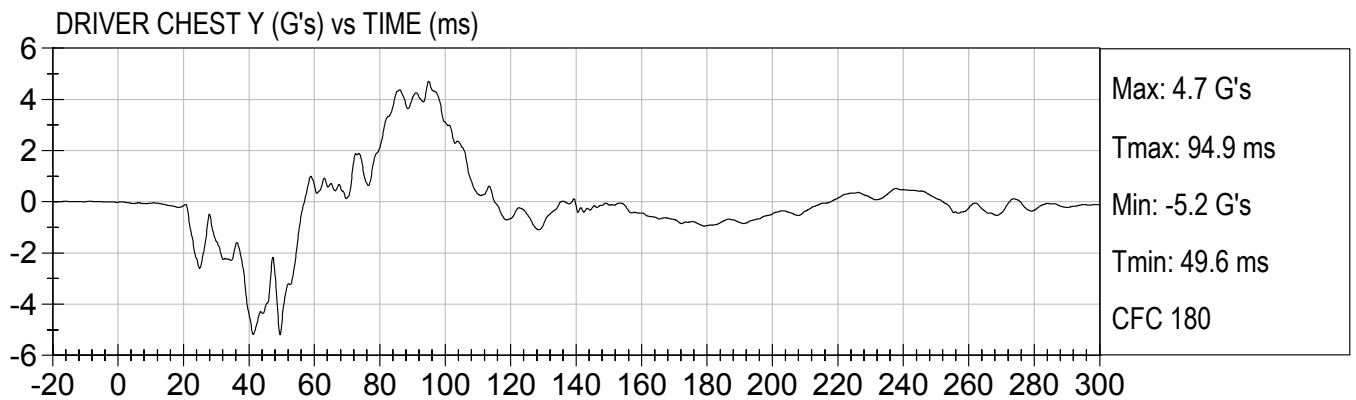
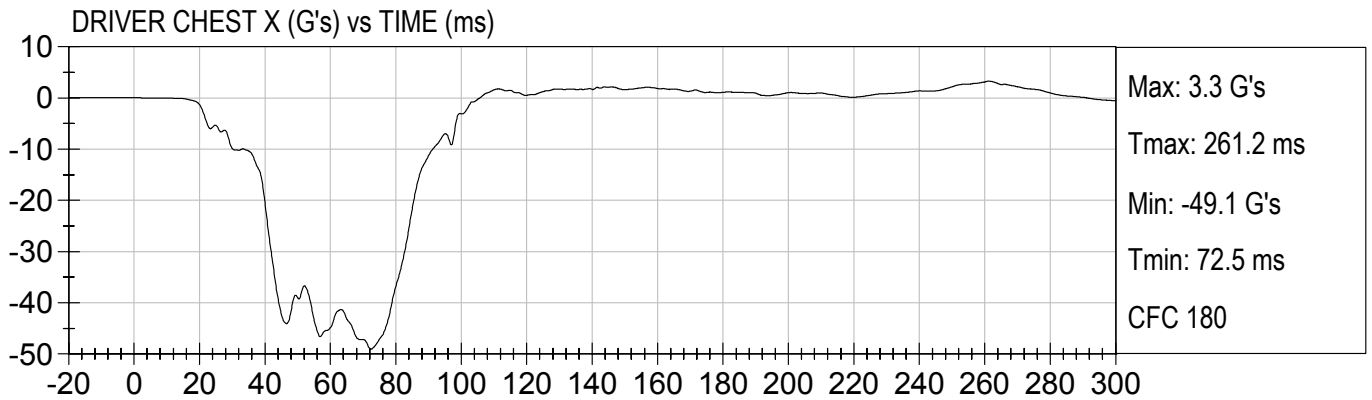


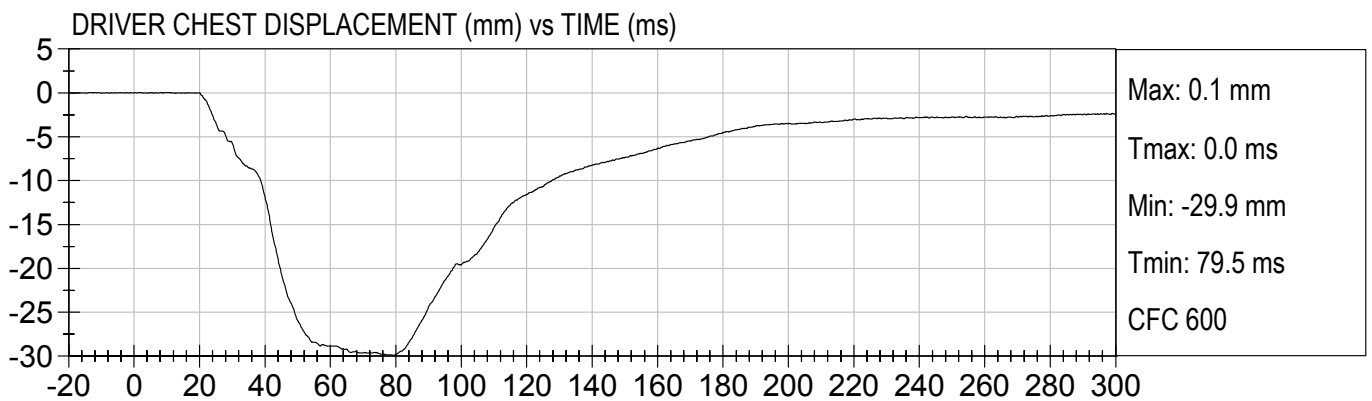
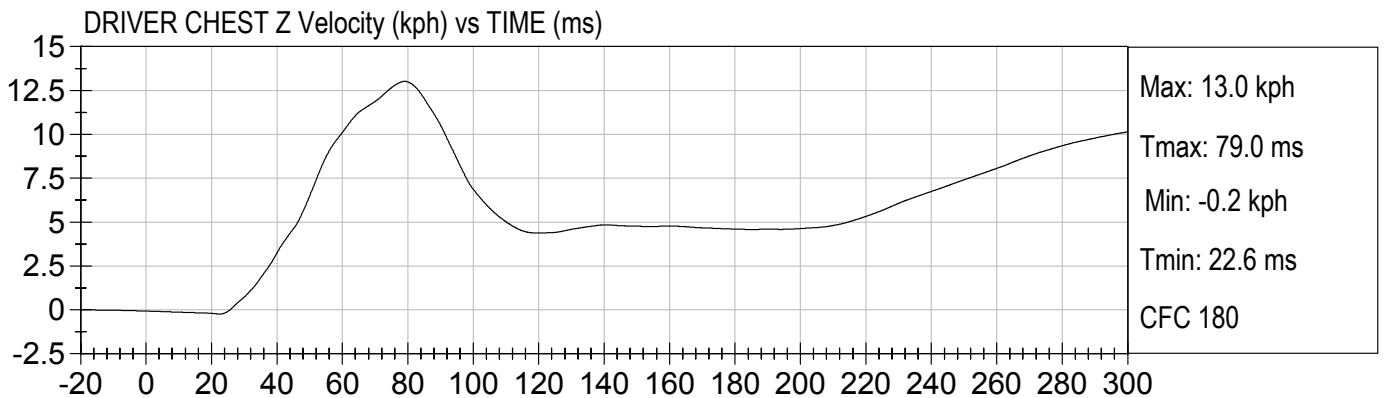
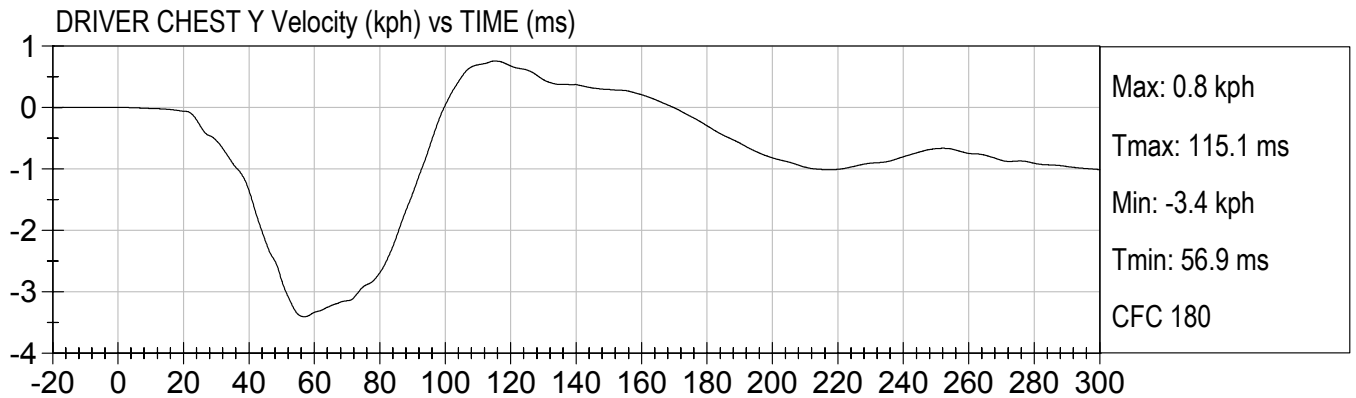
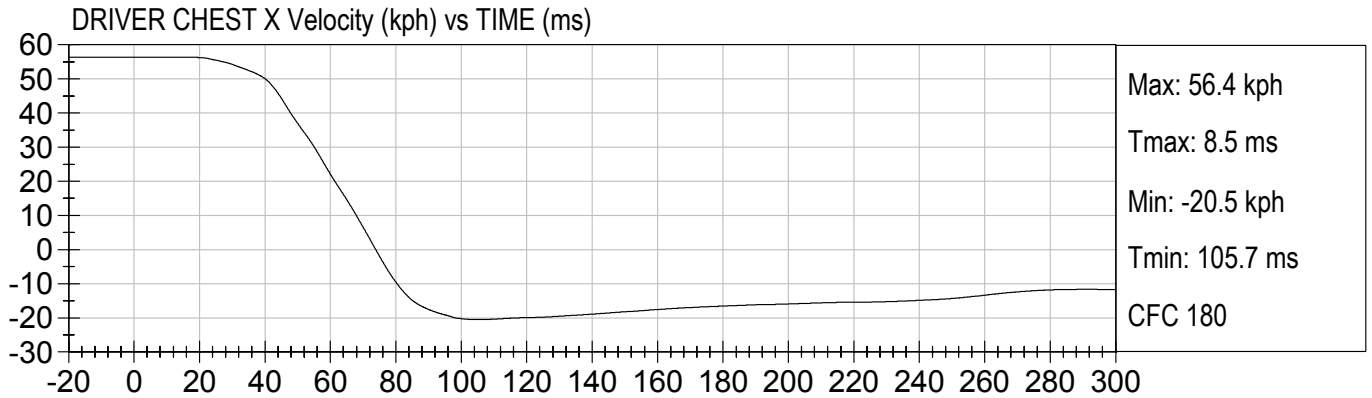


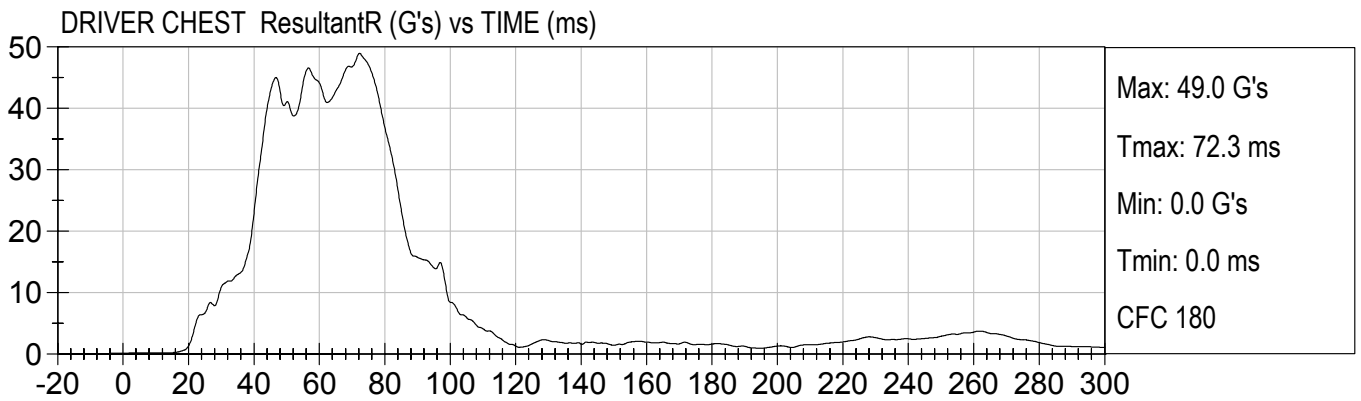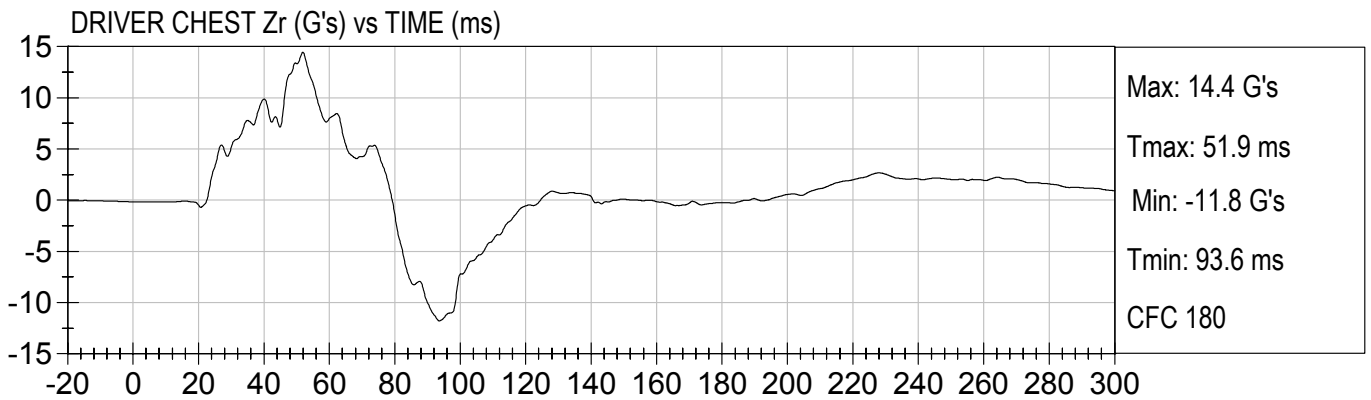
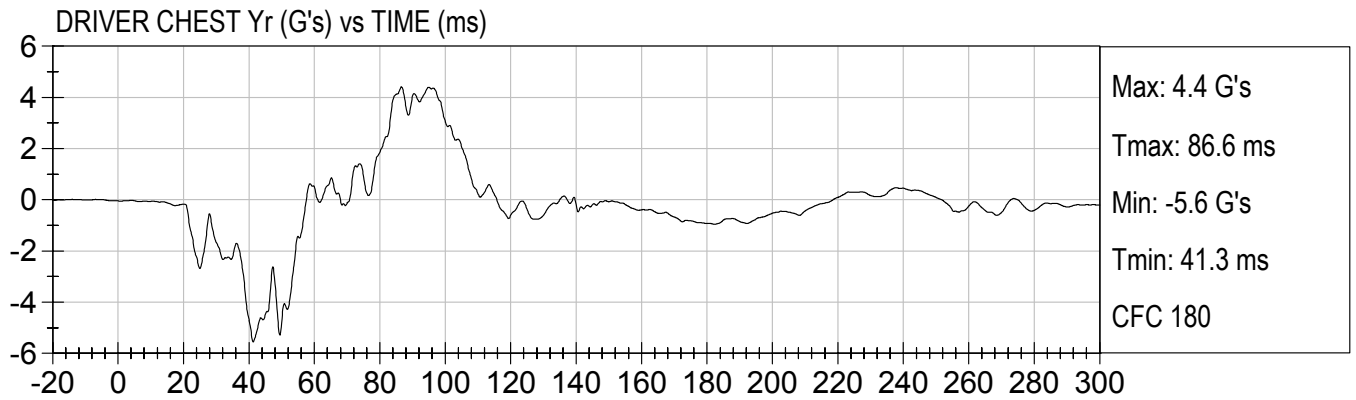
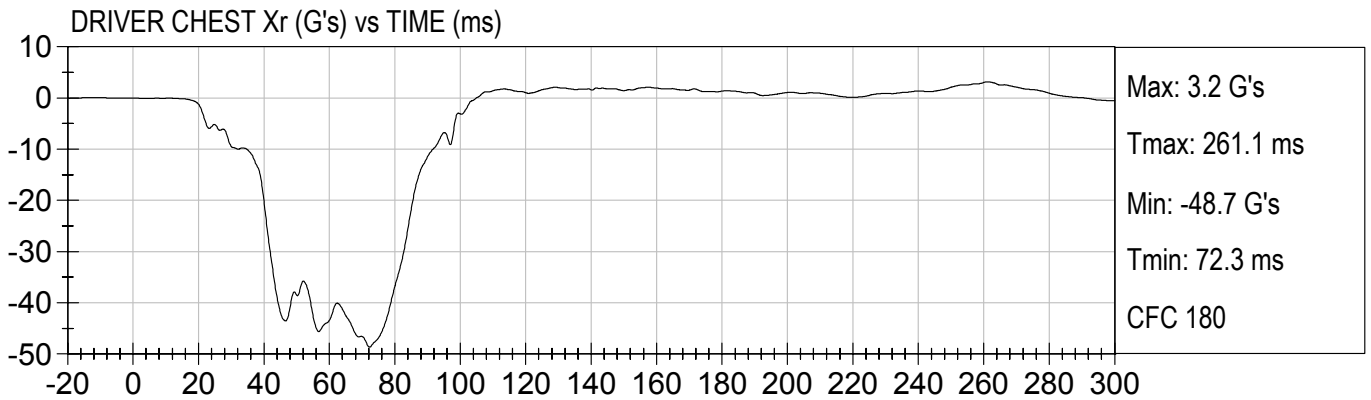


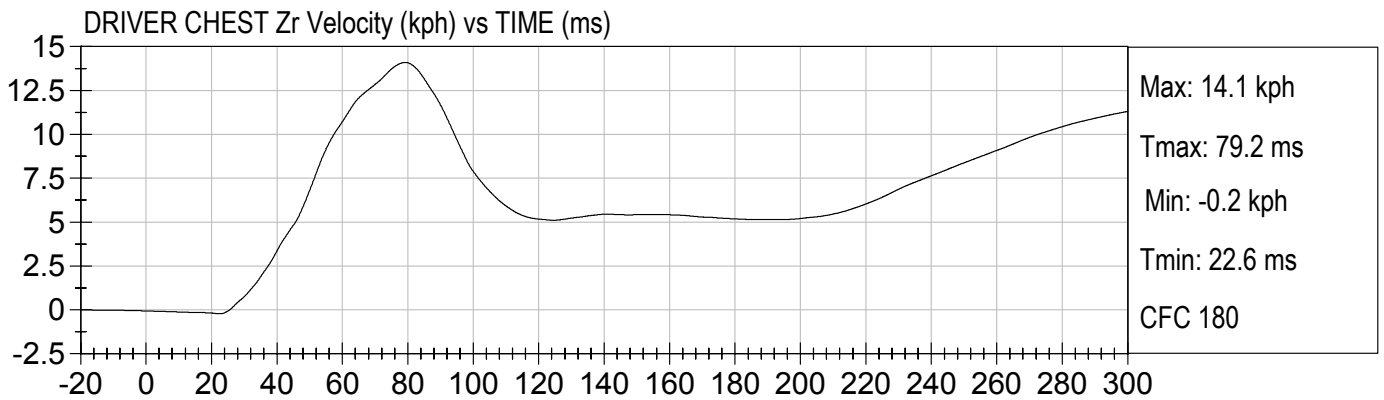
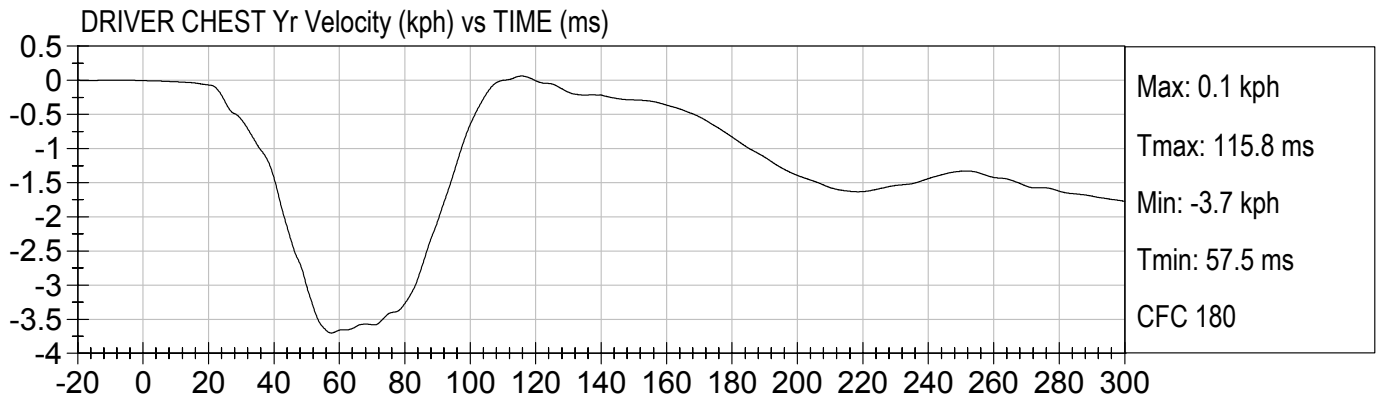
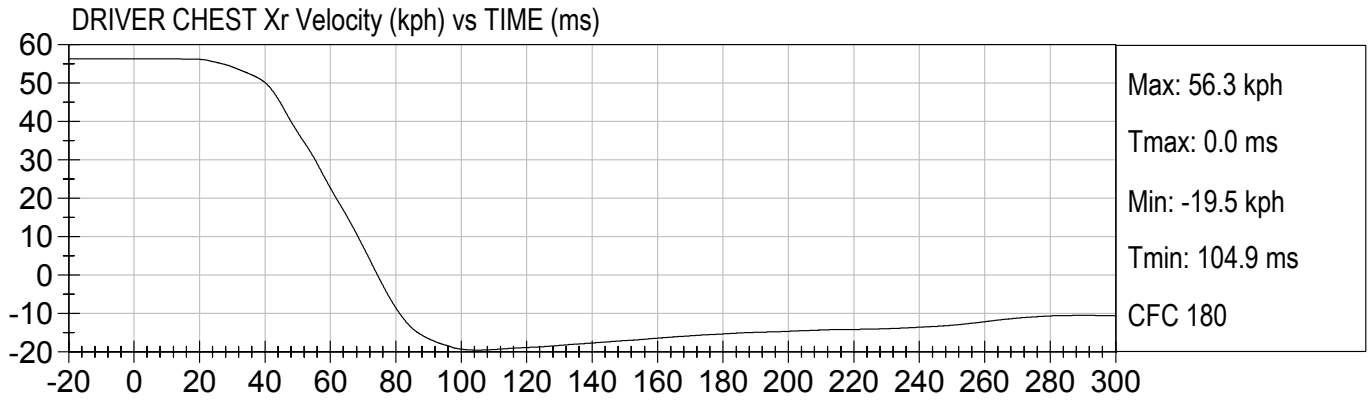


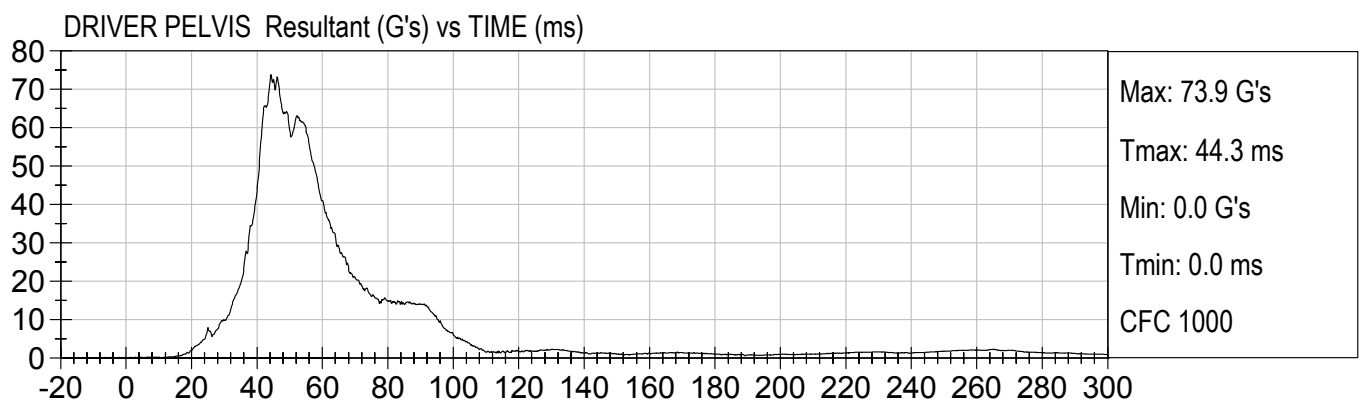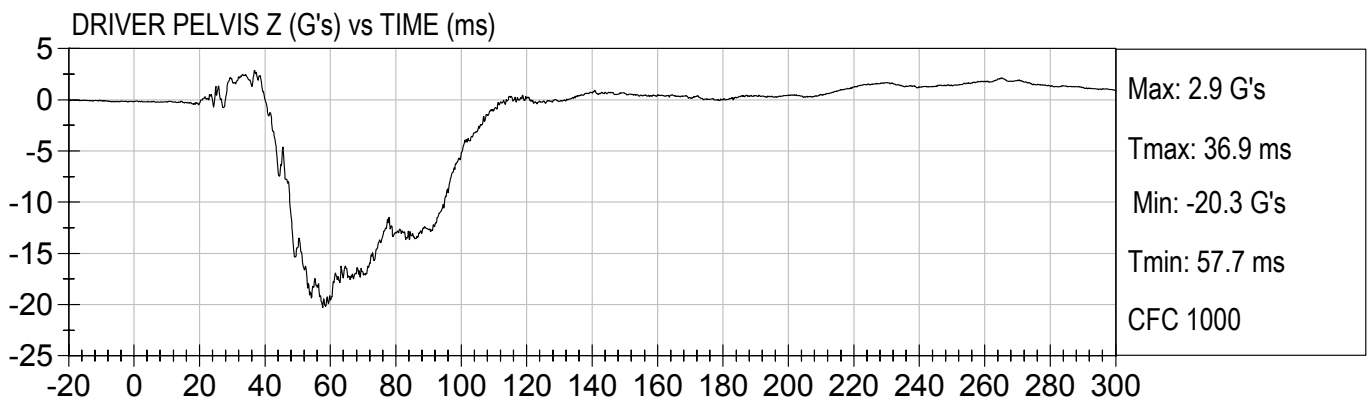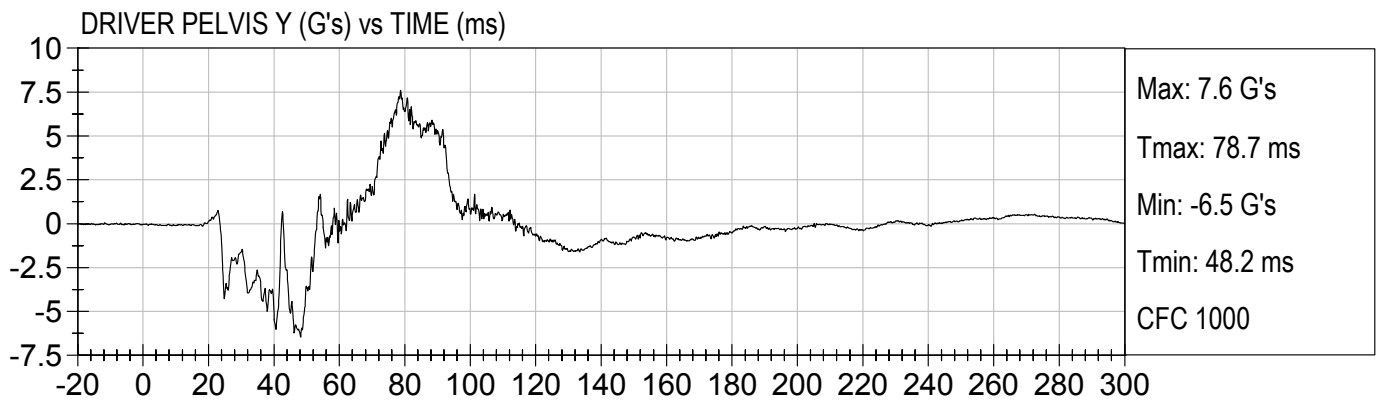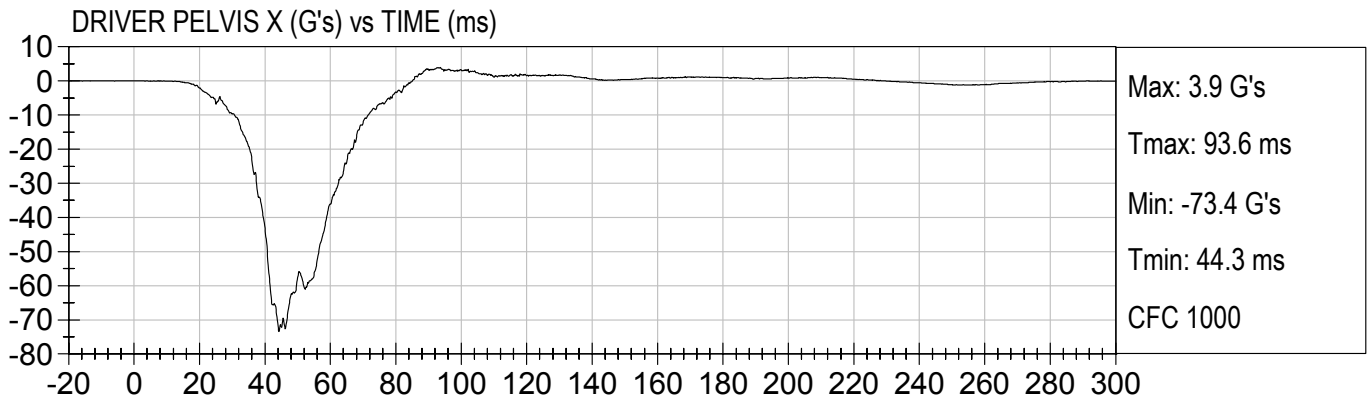

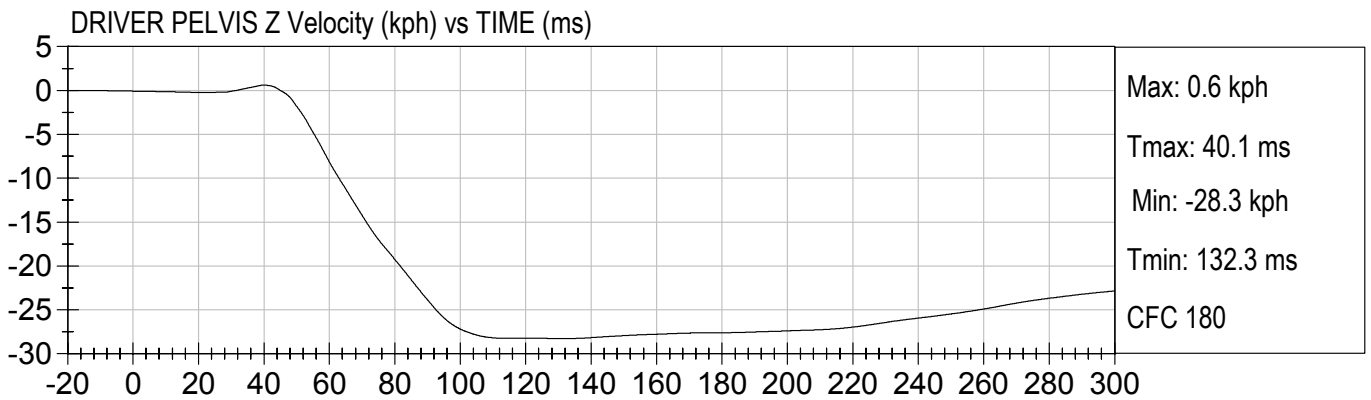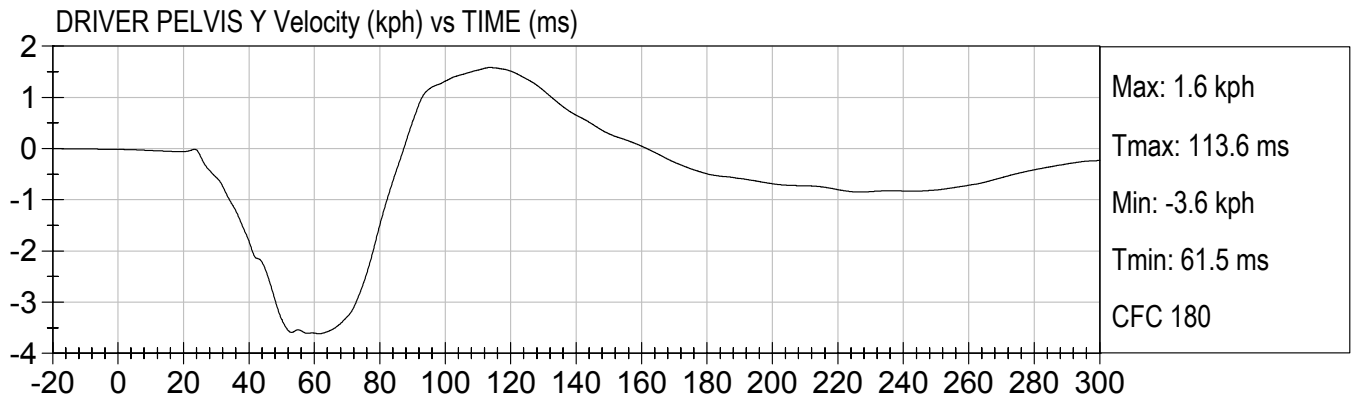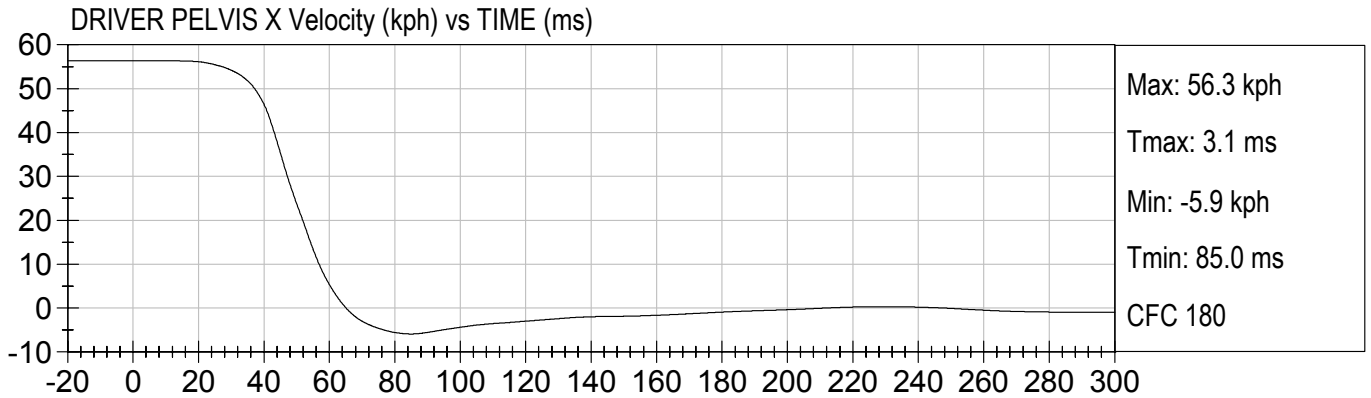

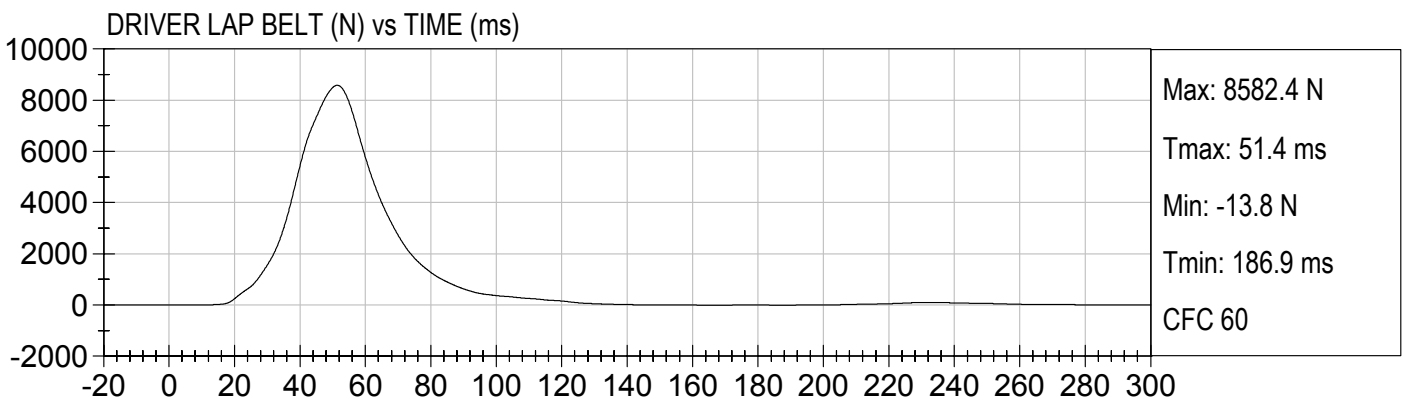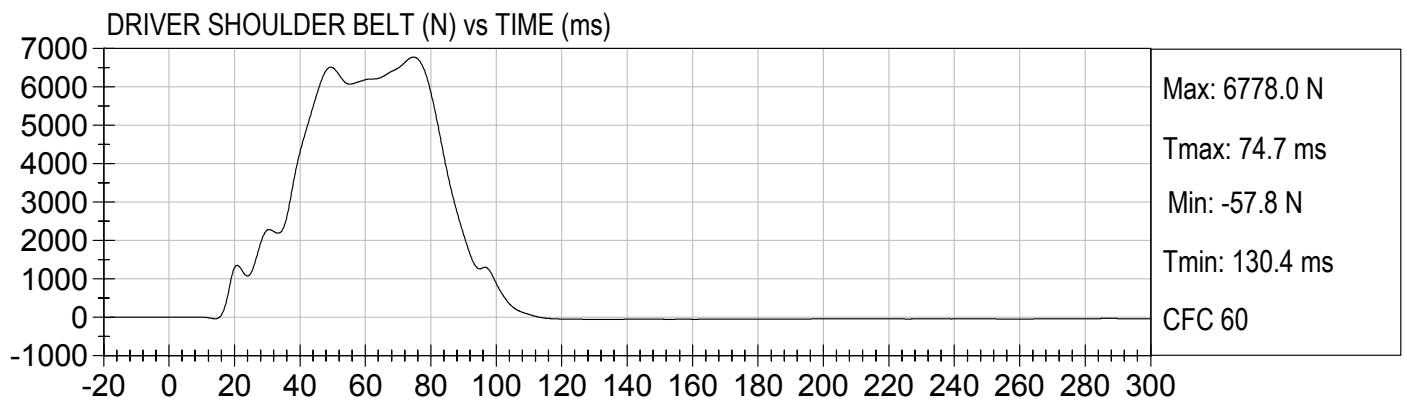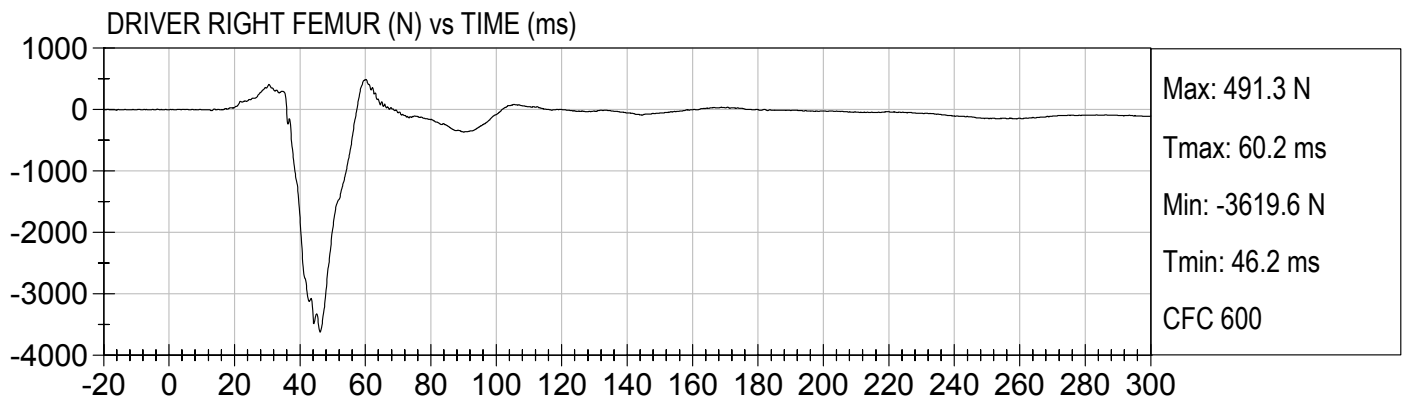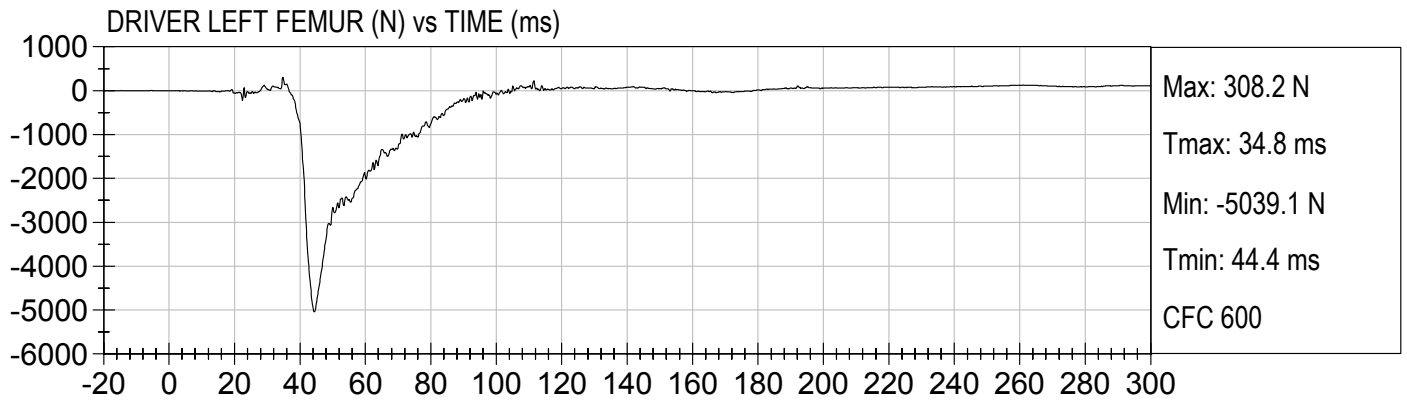


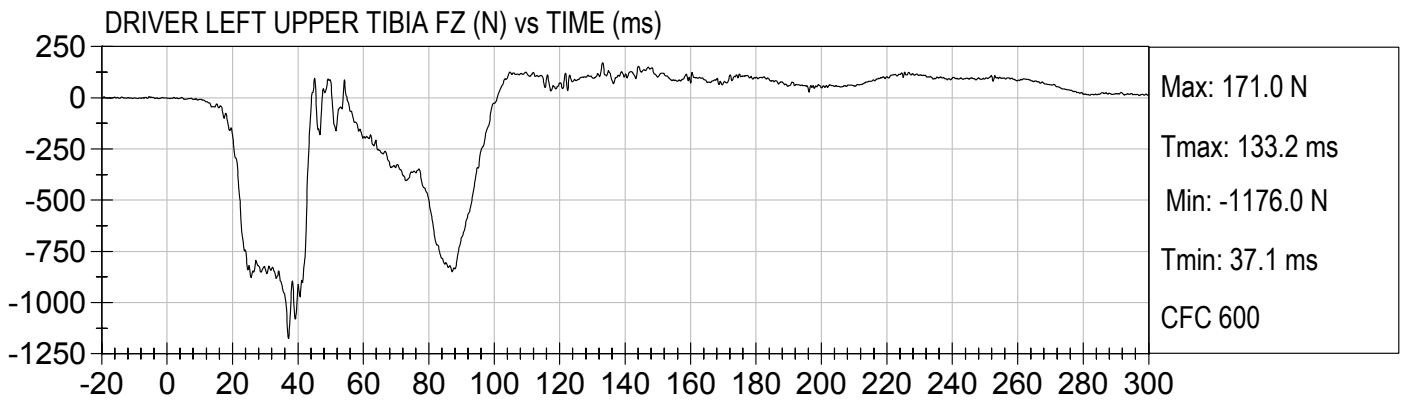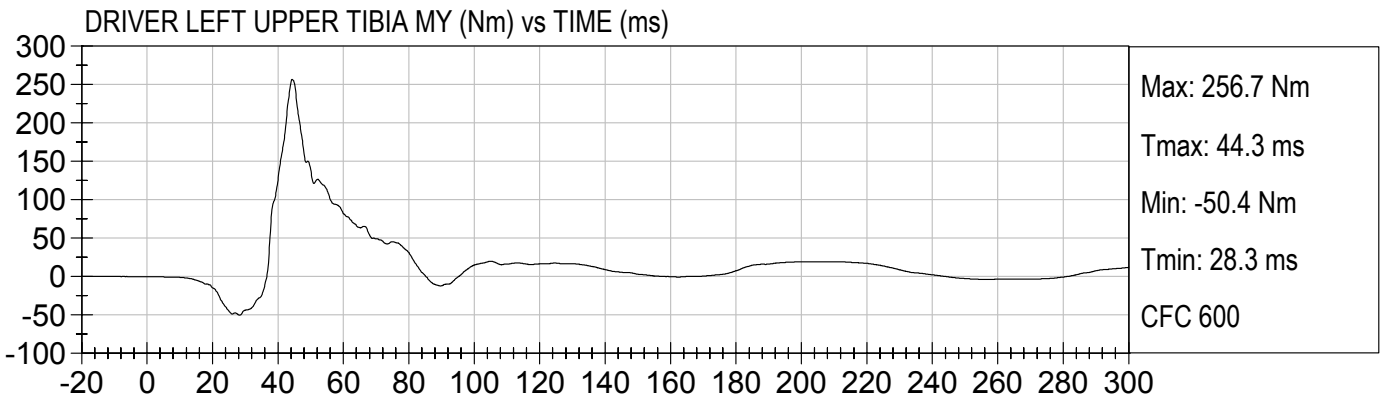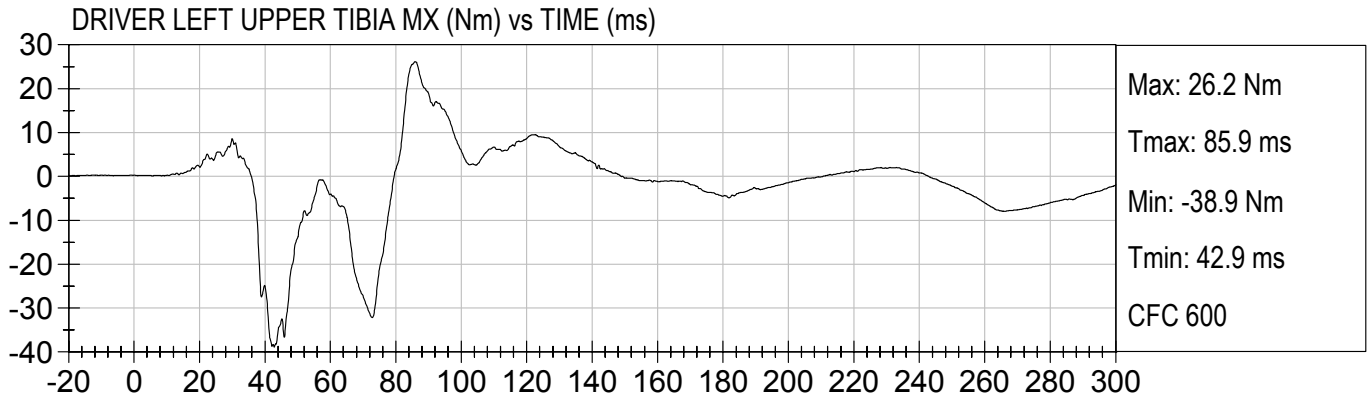

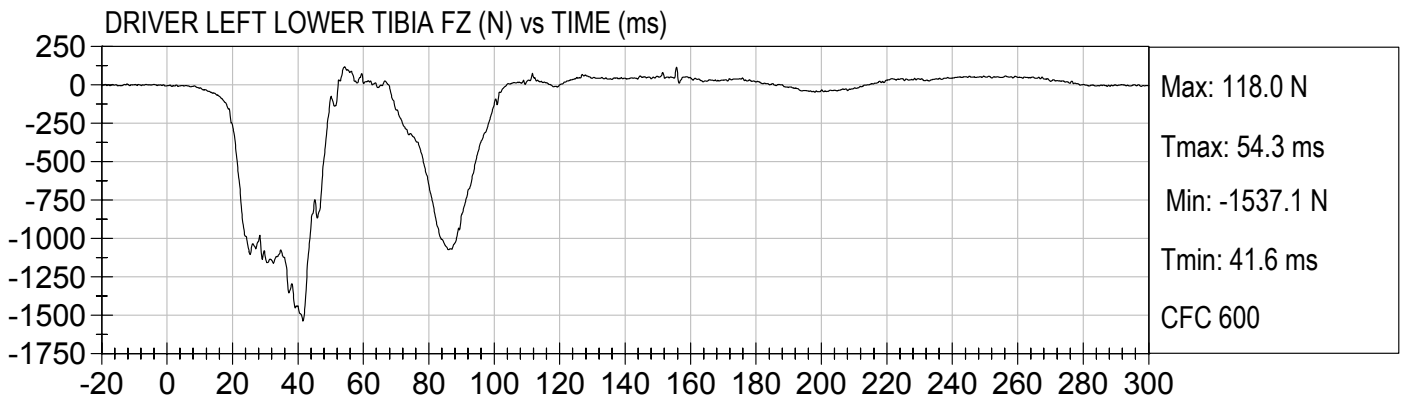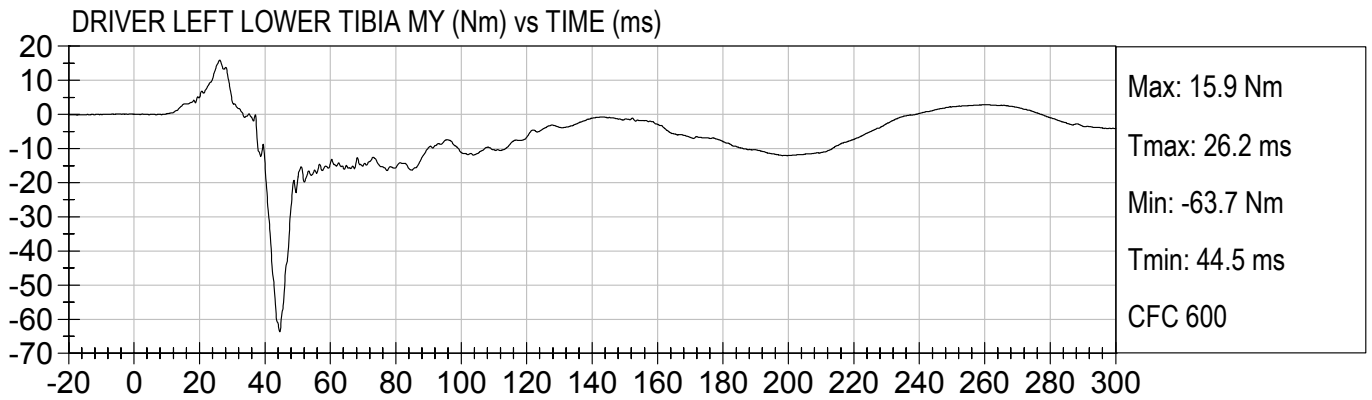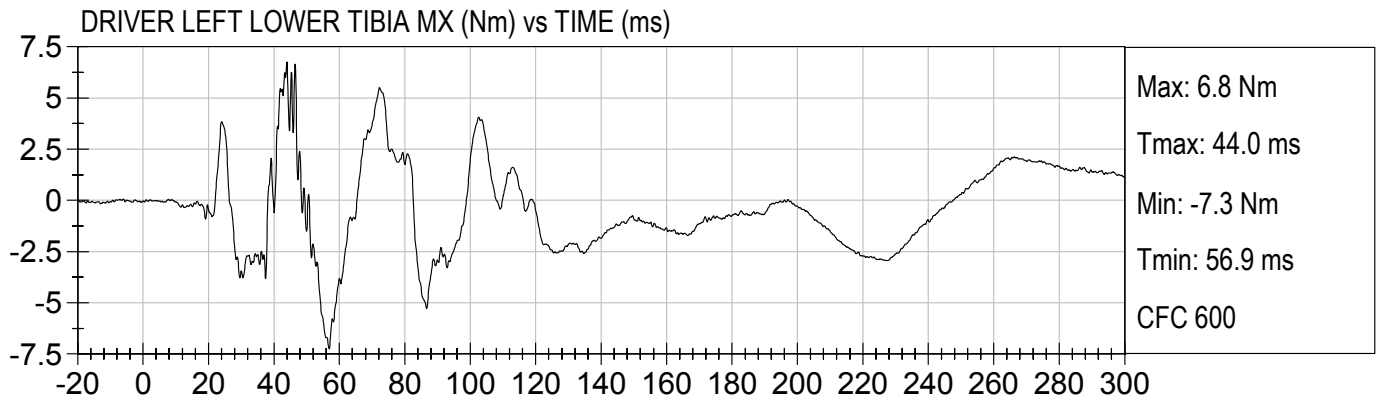





DRIVER RIGHT UPPER TIBIA MX (Nm) vs TIME (ms)

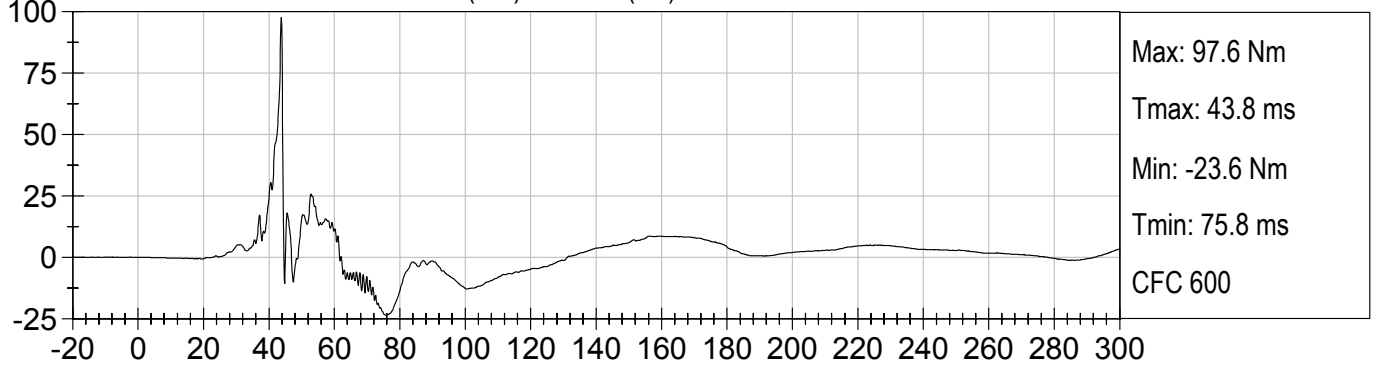

DRIVER RIGHT UPPER TIBIA MY (Nm) vs TIME (ms)

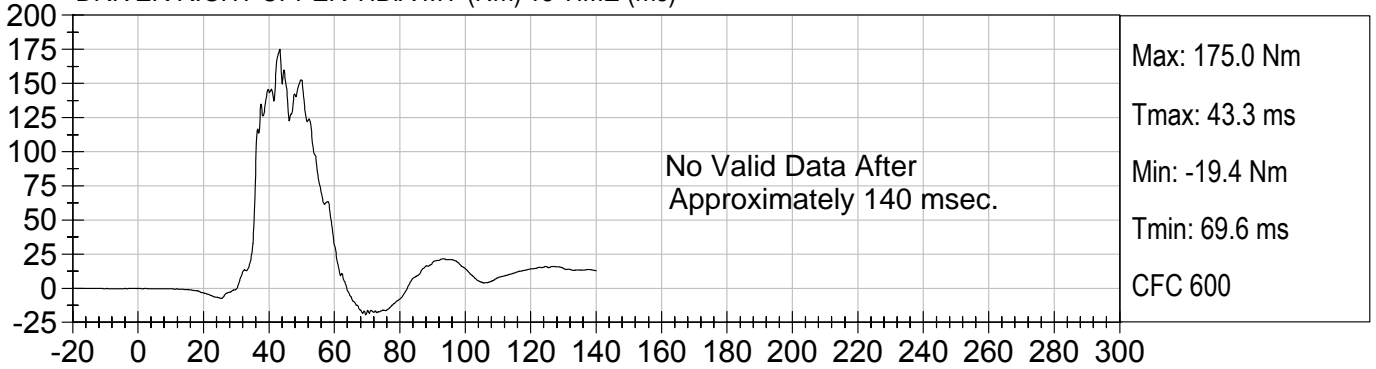


DRIVER RIGHT UPPER TIBIA FZ (N) vs TIME (ms)

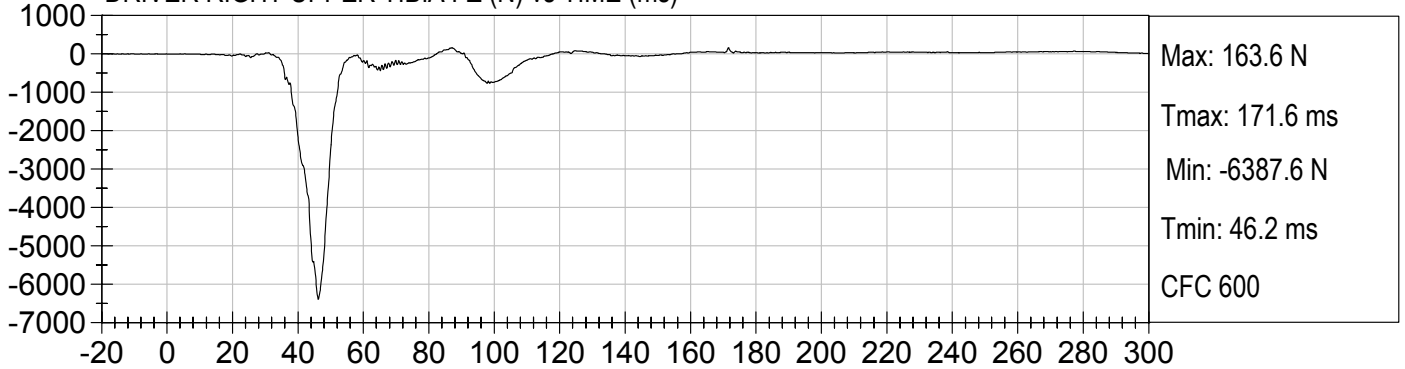





DRIVER RIGHT LOWER TIBIA MX (Nm) vs TIME (ms)



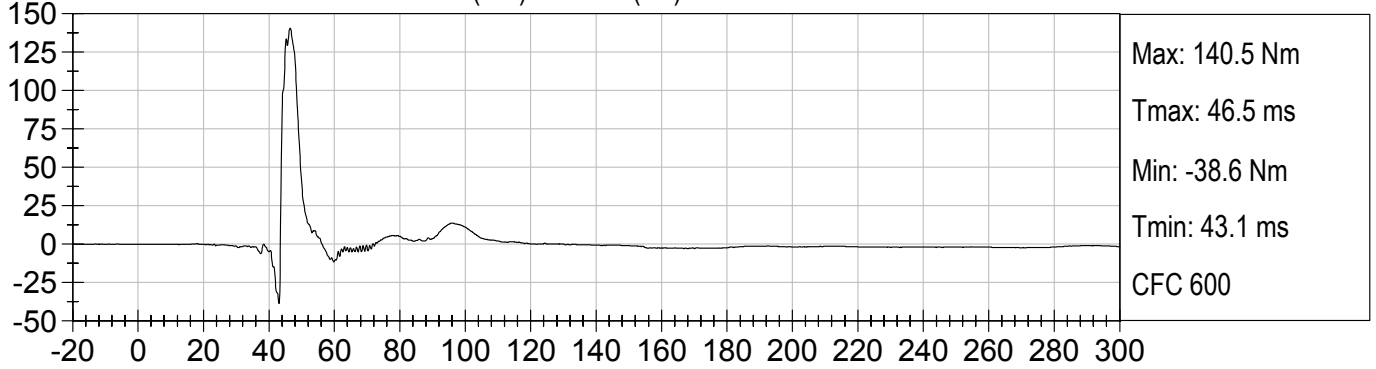





DRIVER RIGHT LOWER TIBIA MY (Nm) vs TIME (ms)



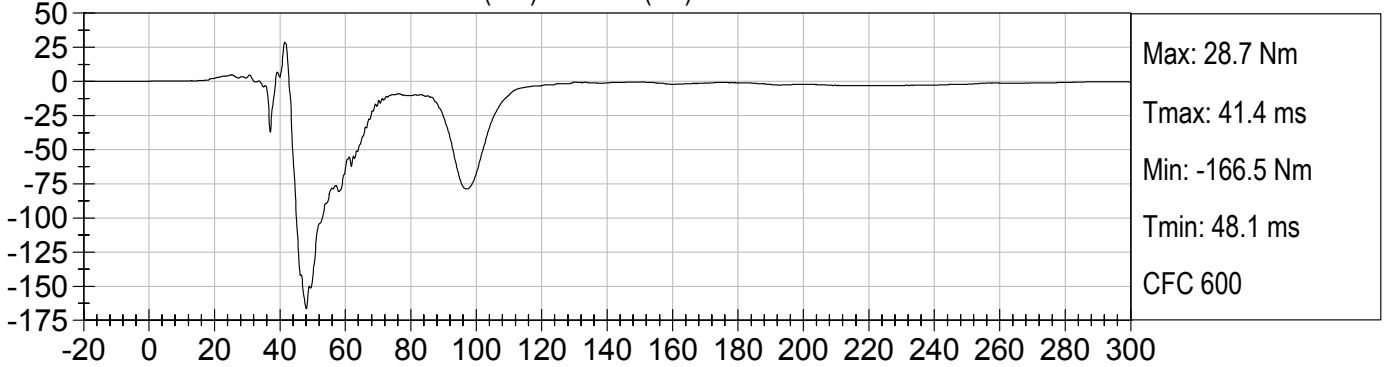





DRIVER RIGHT LOWER TIBIA FZ (N) vs TIME (ms)



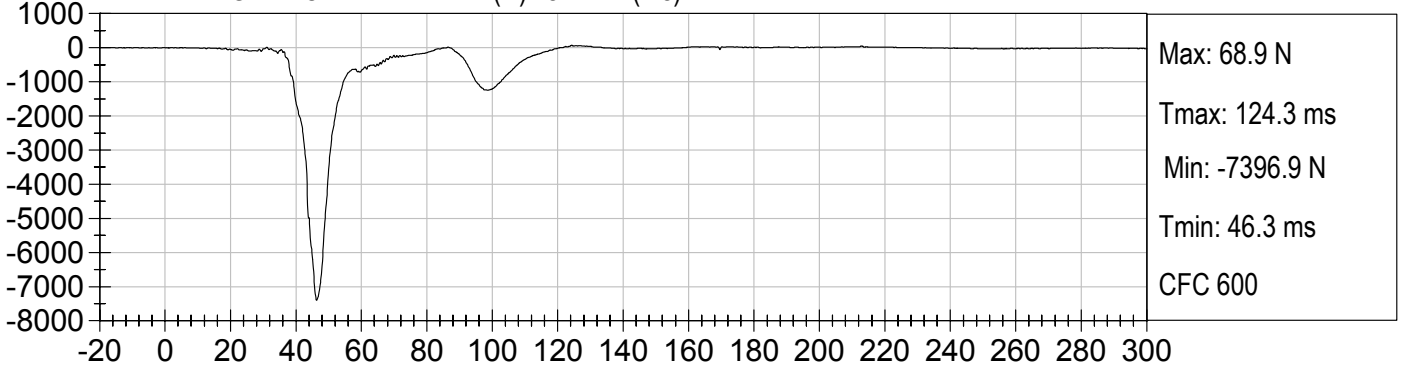


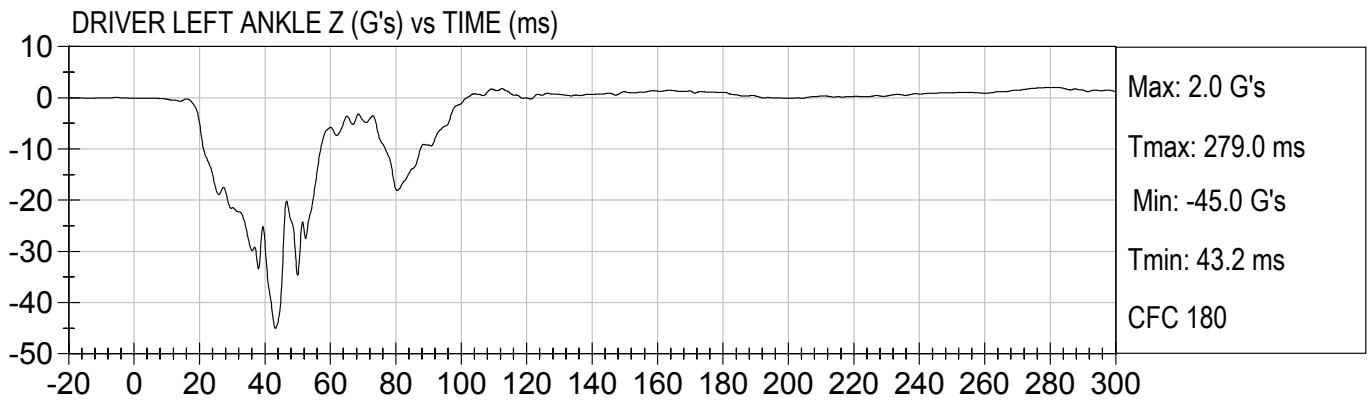
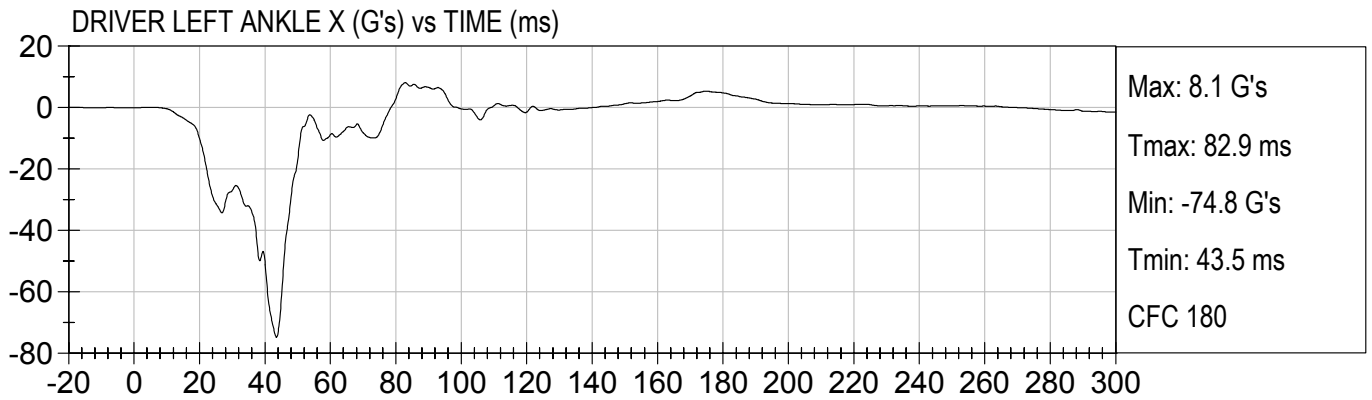
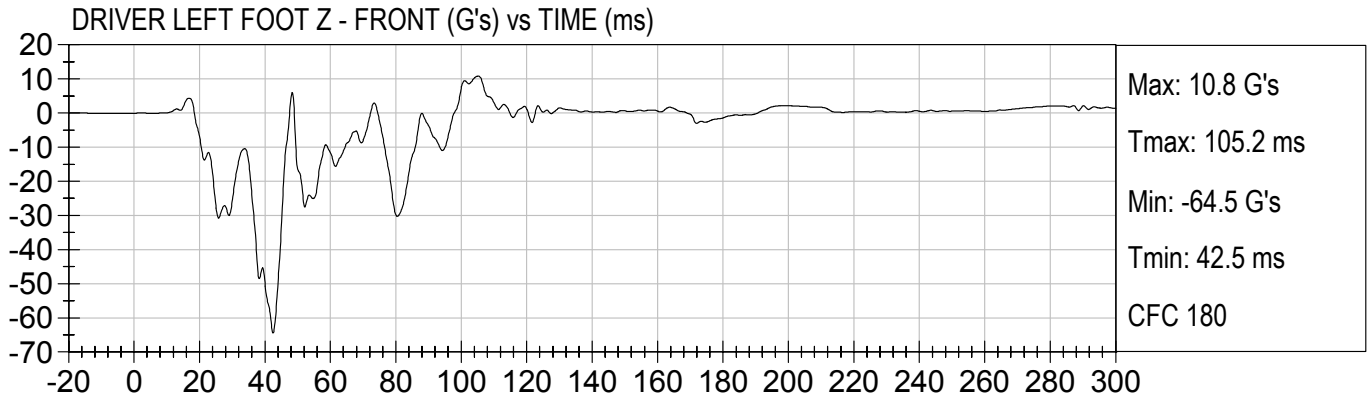



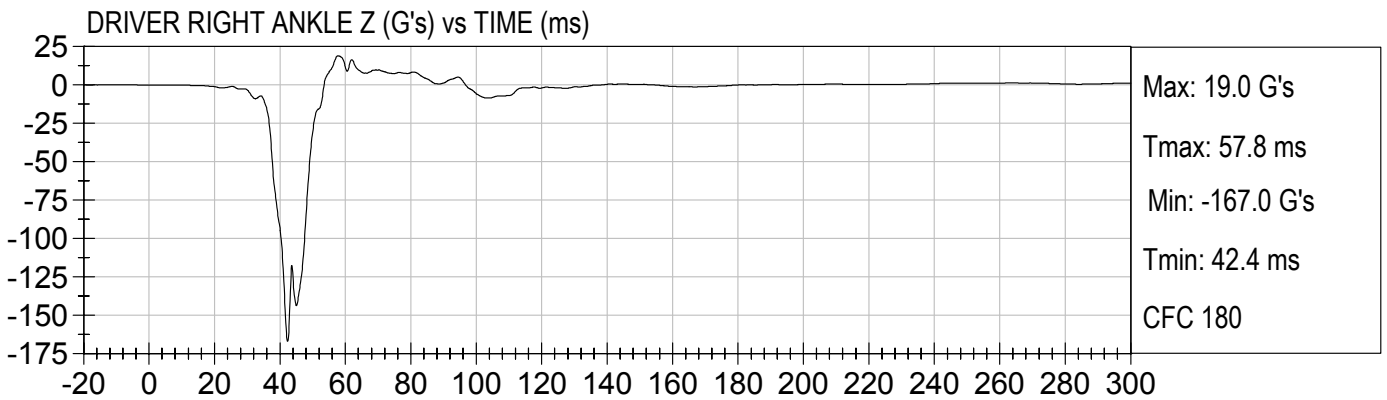
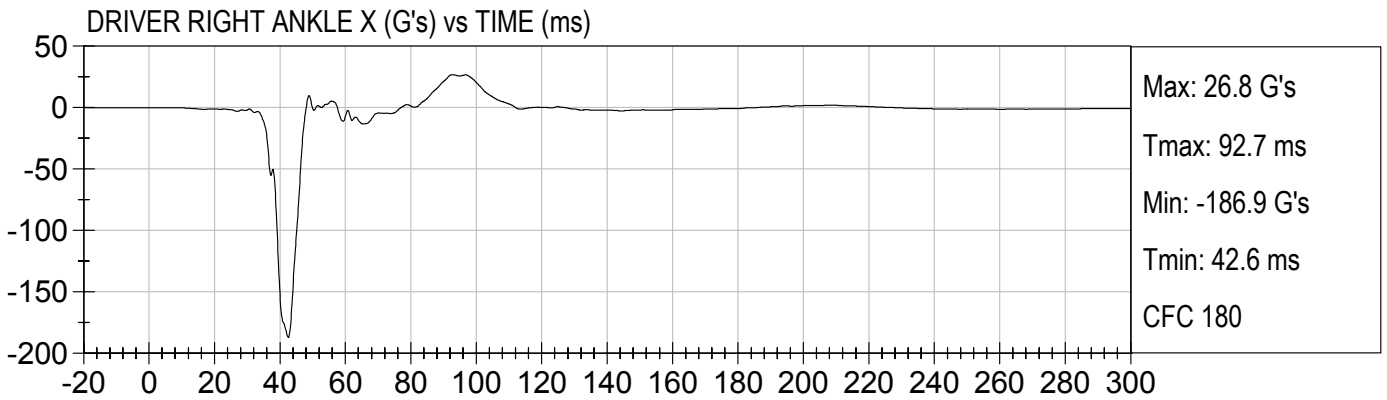
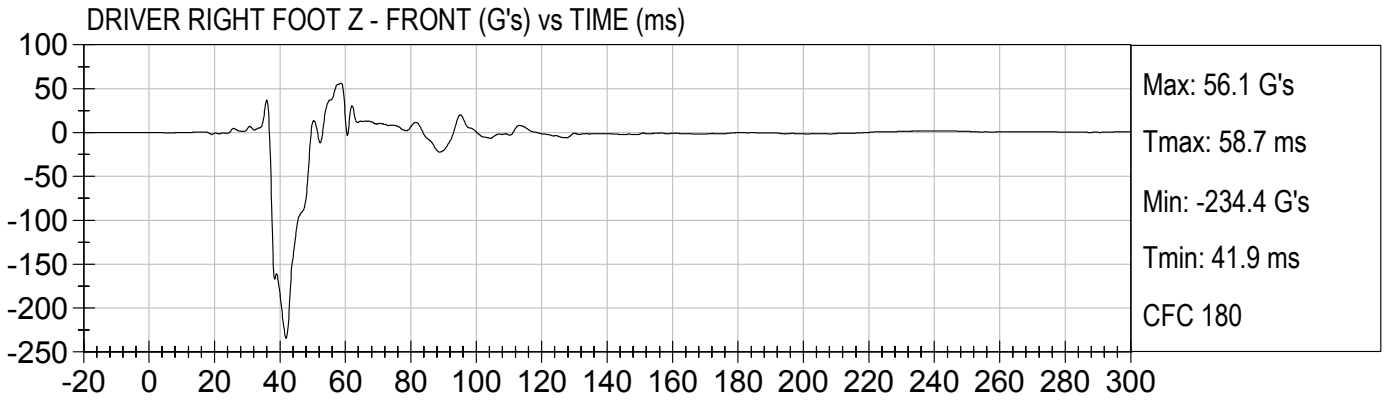



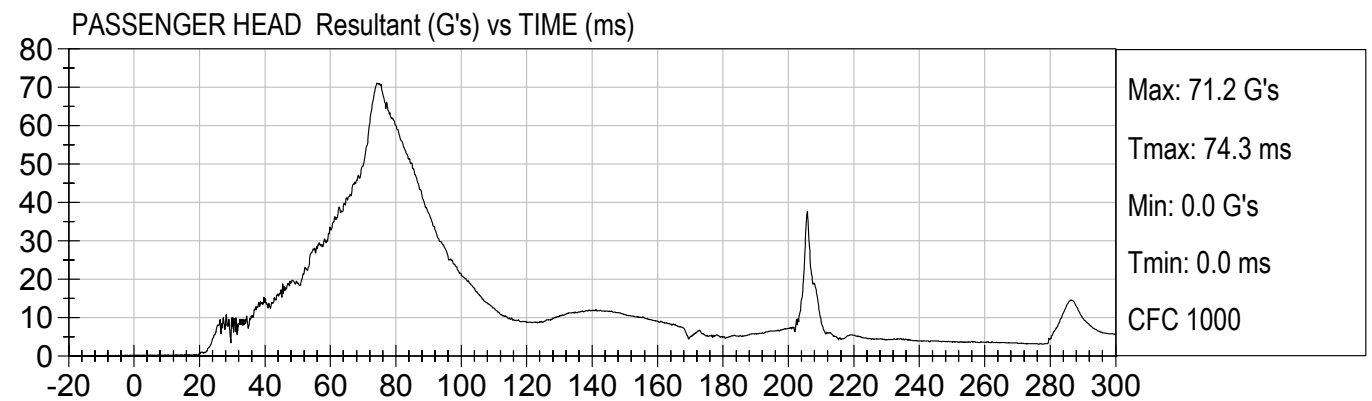
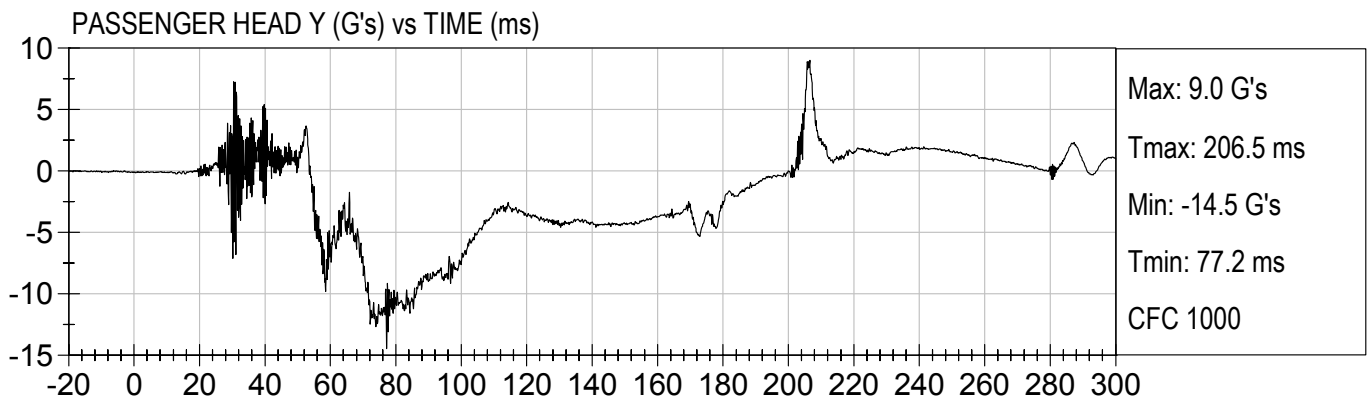
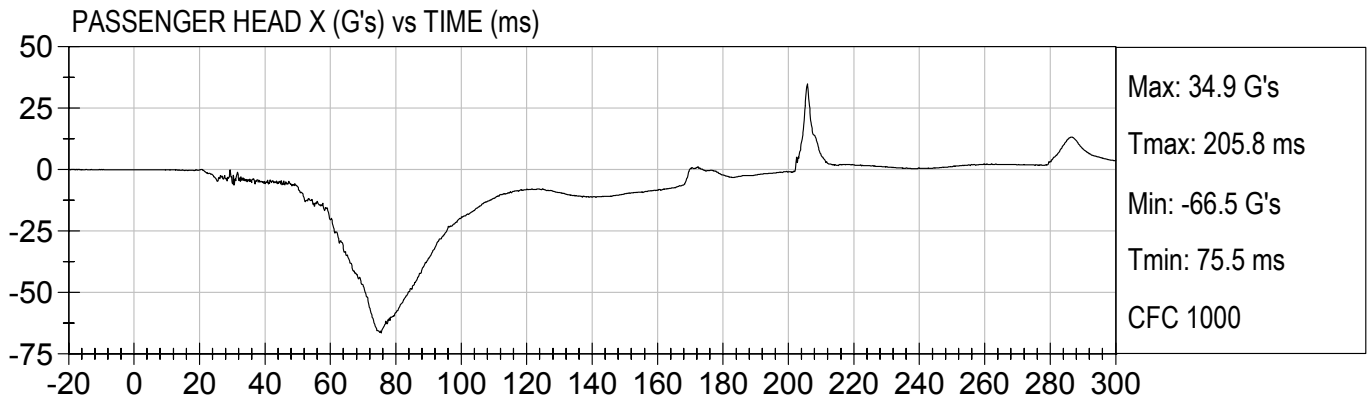



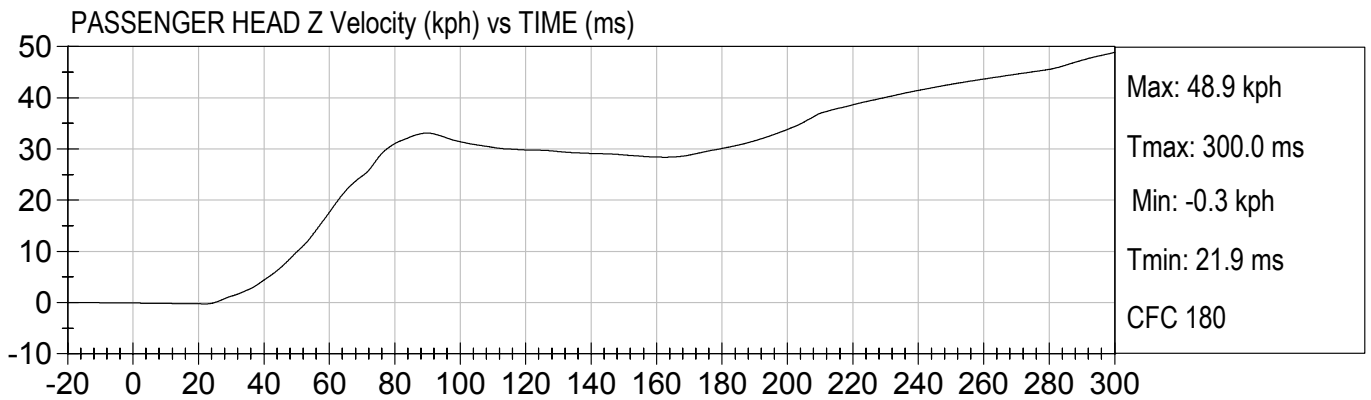
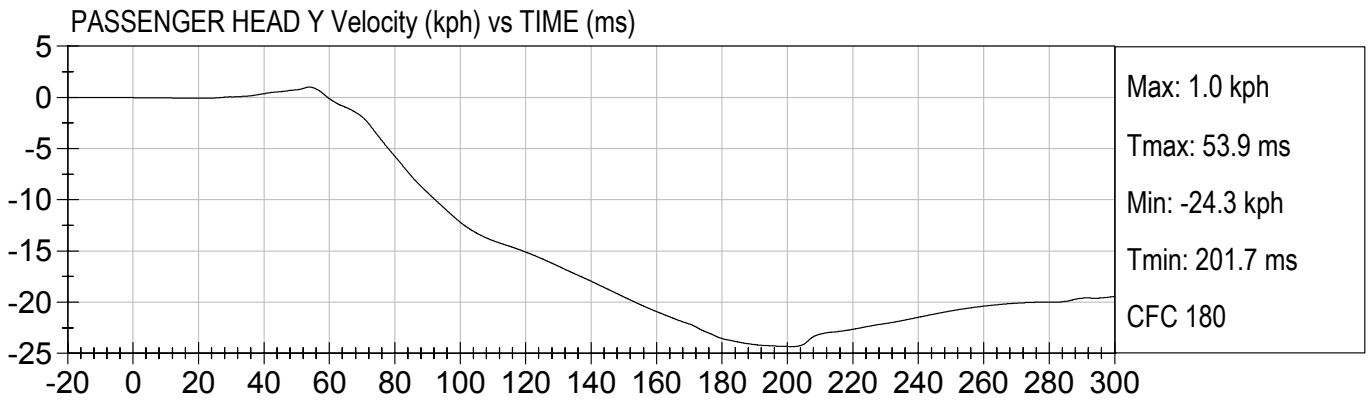
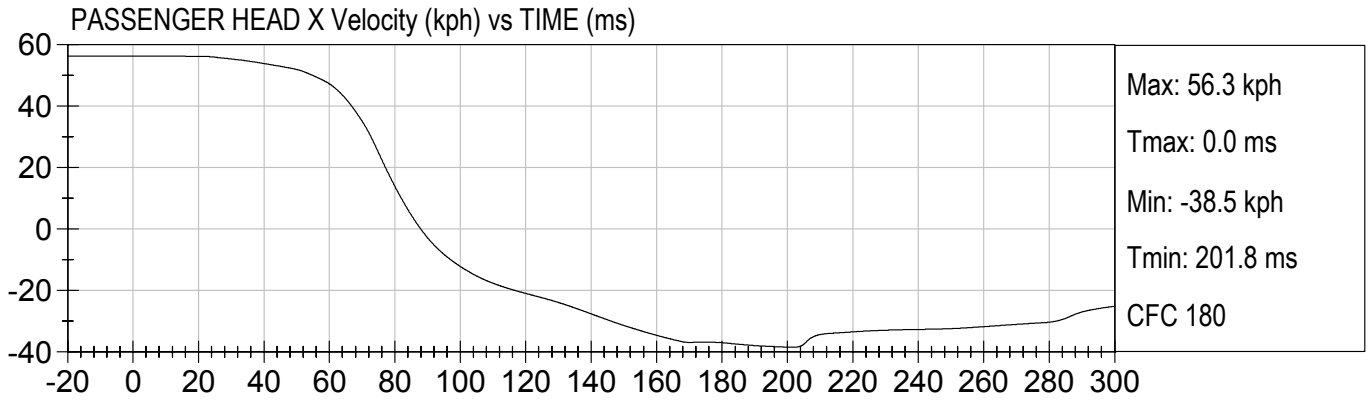



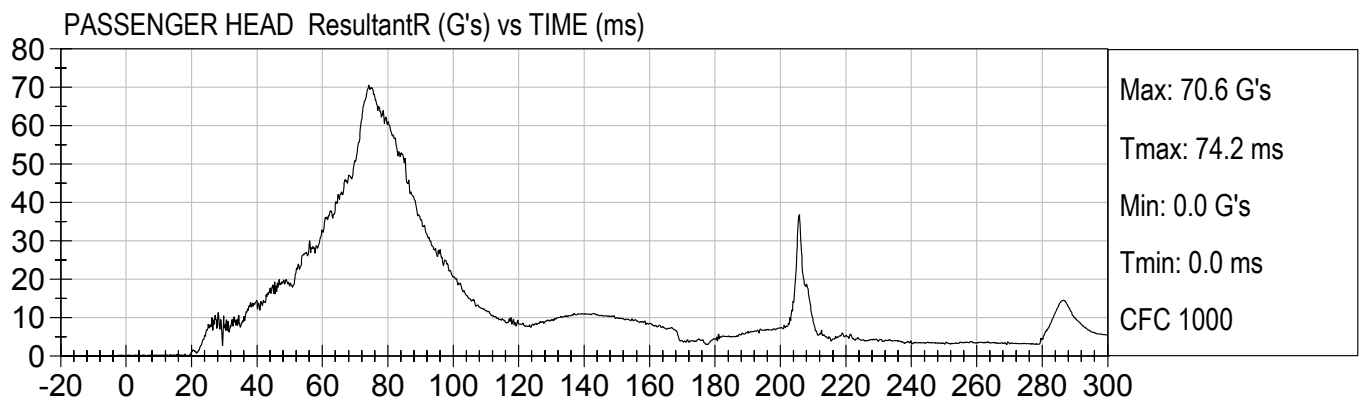
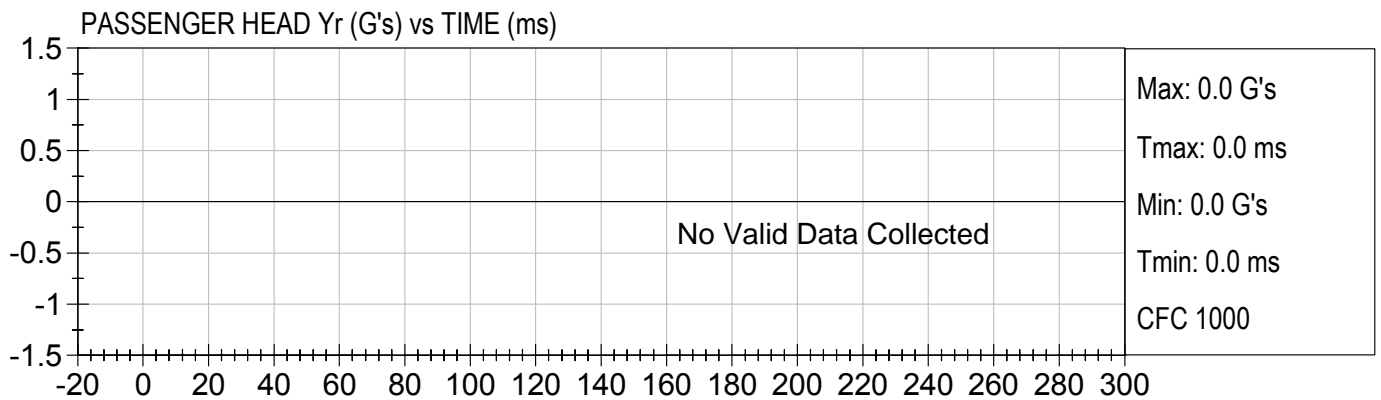
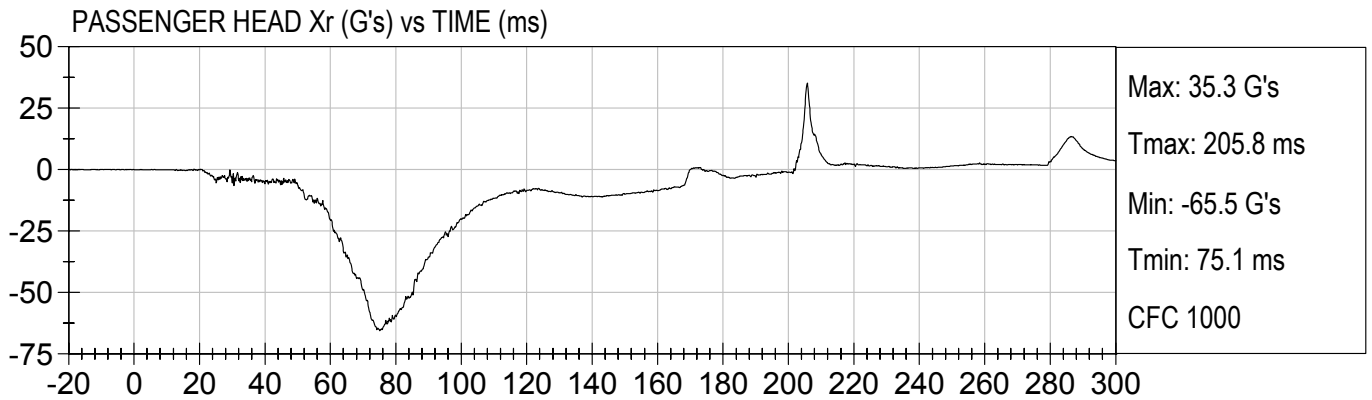



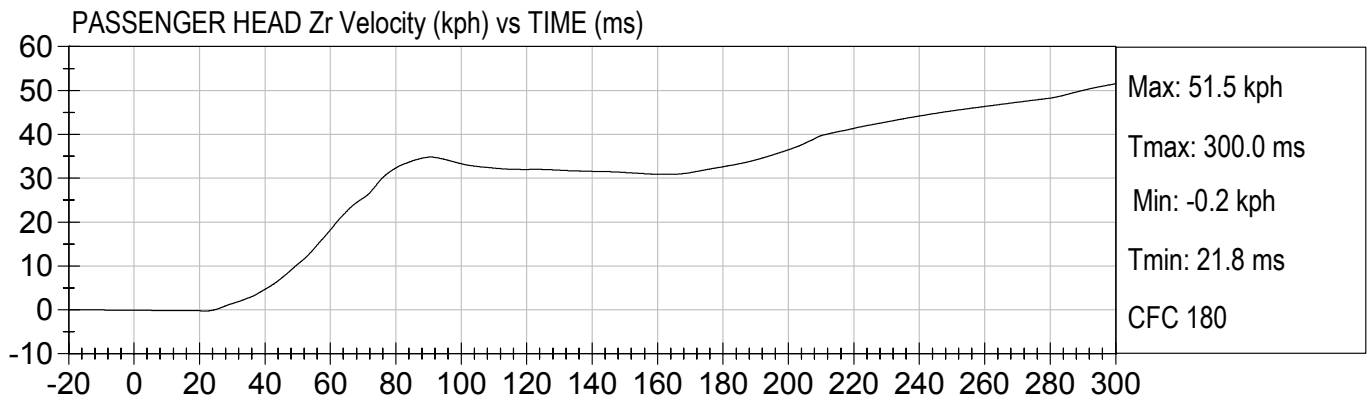
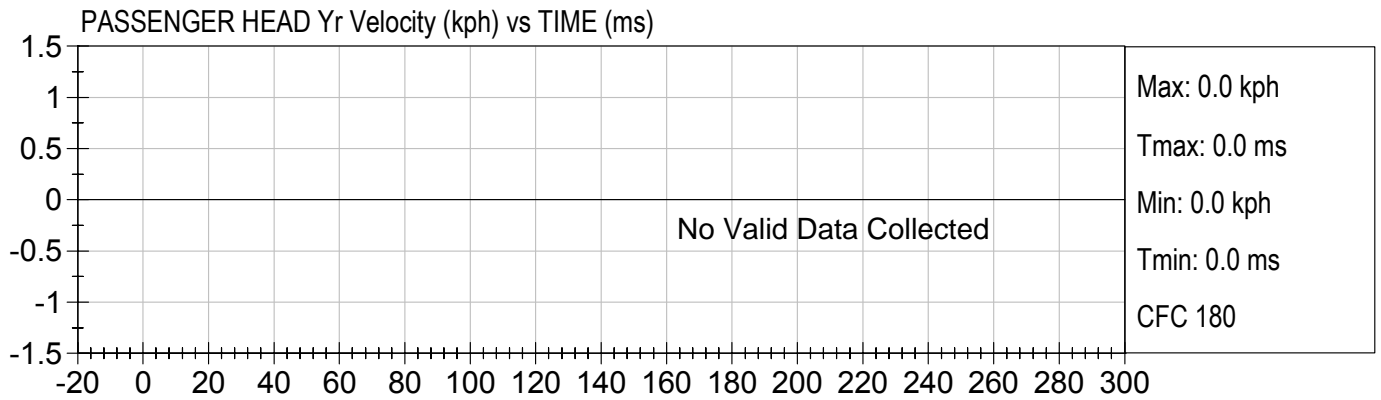
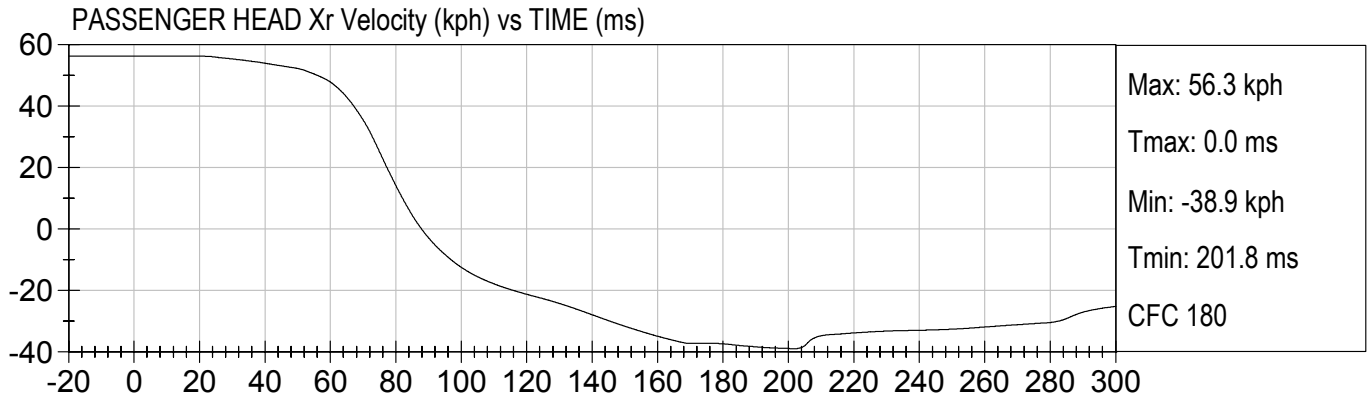


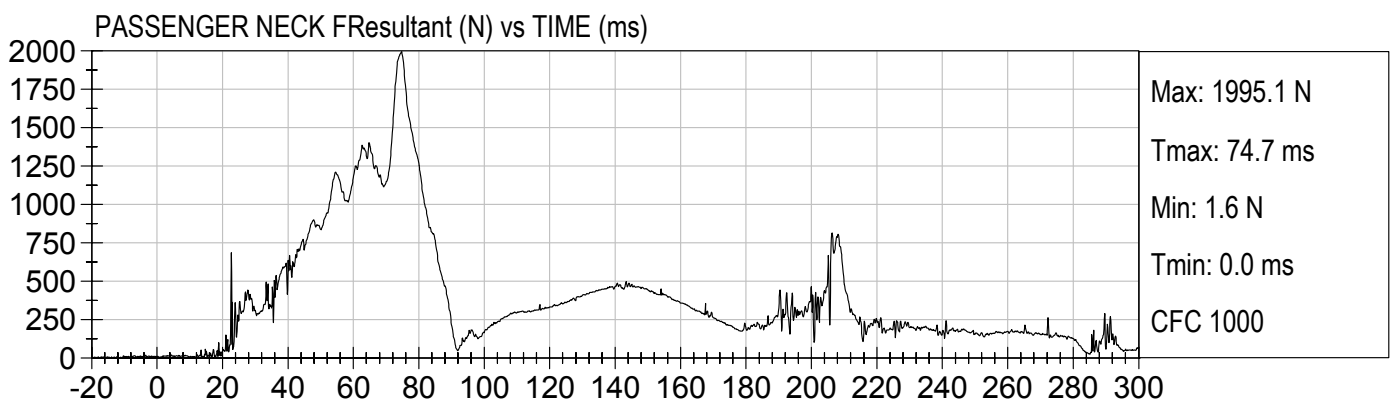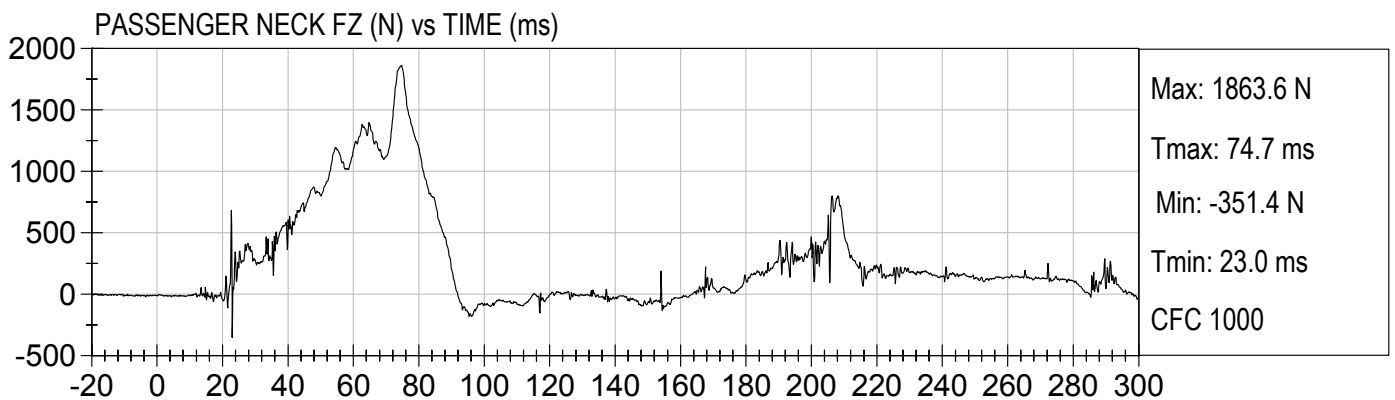
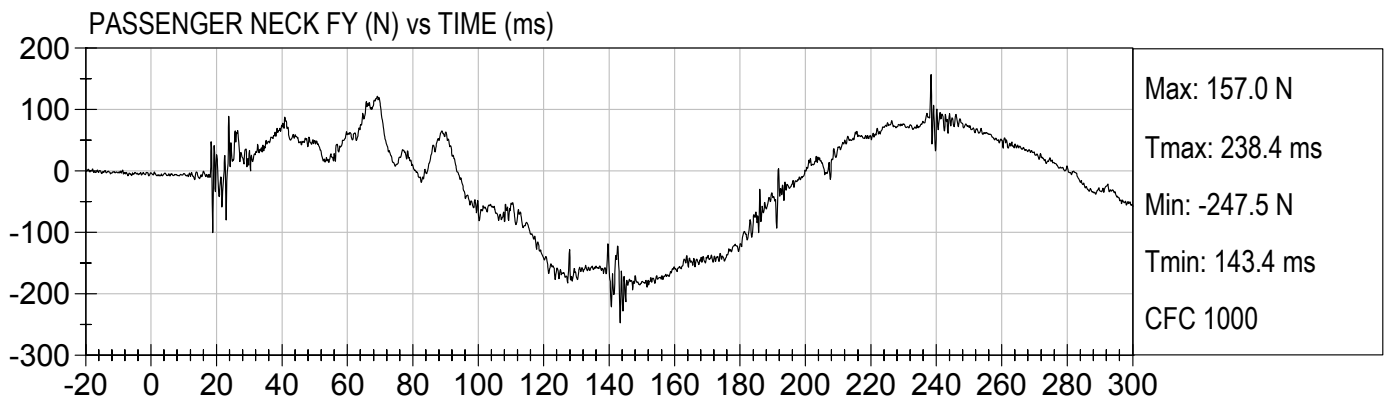
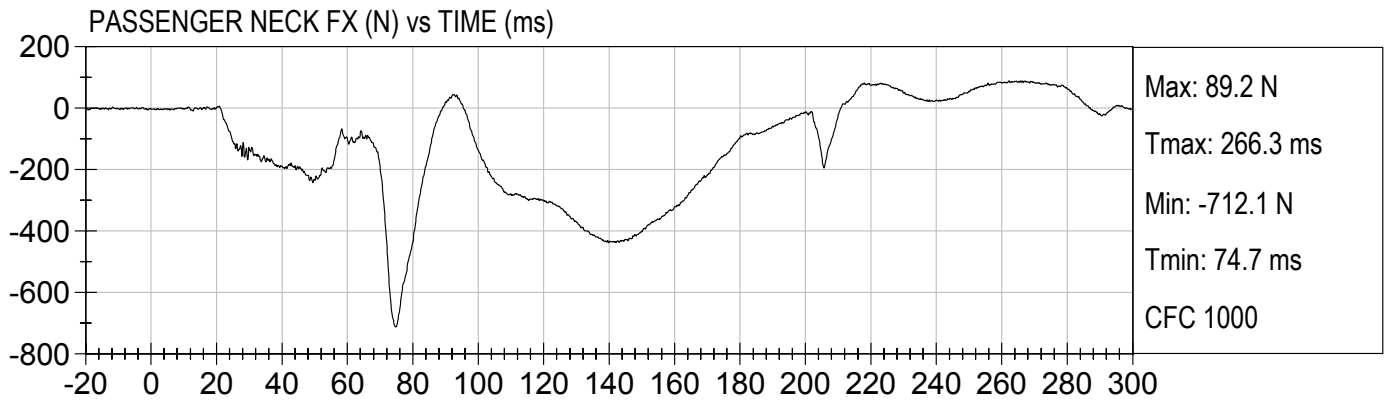


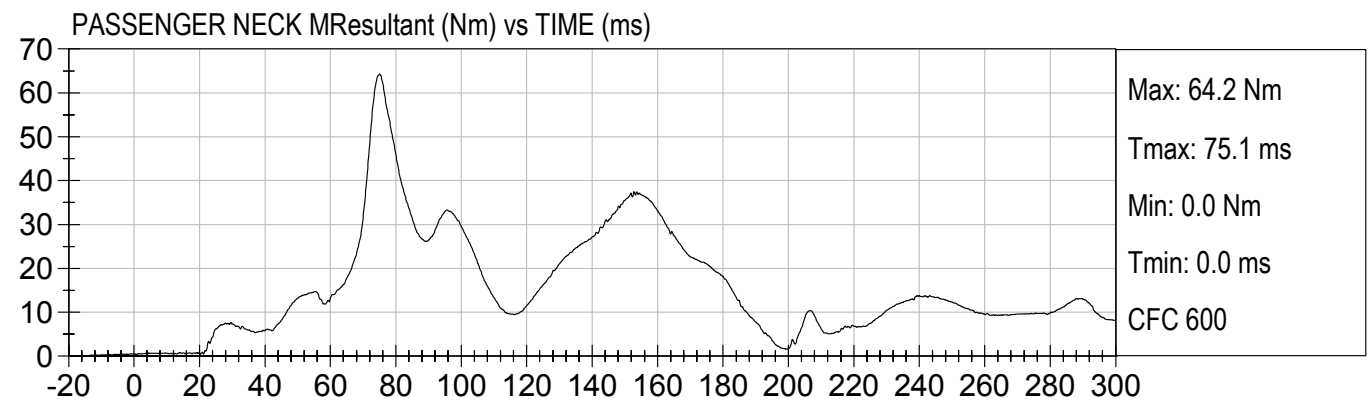
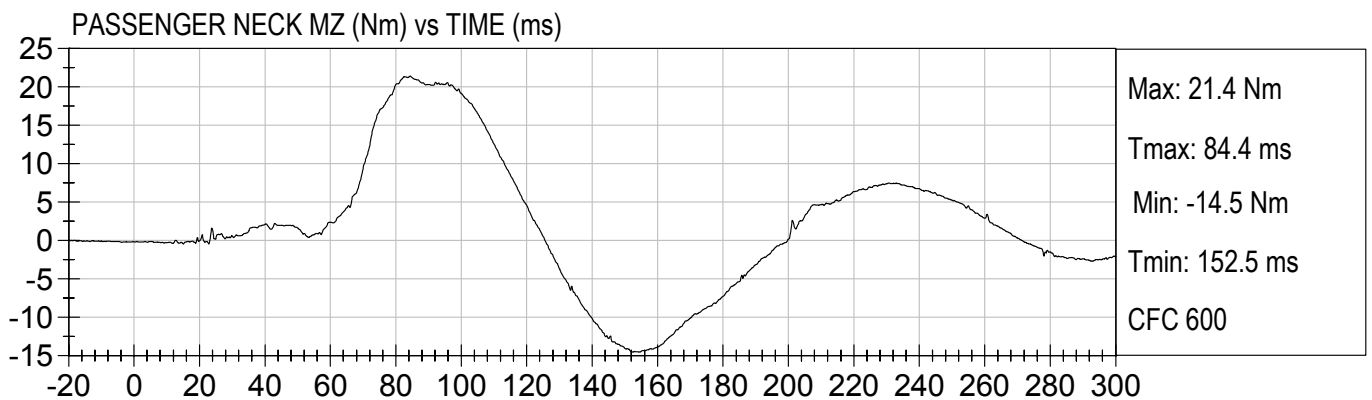
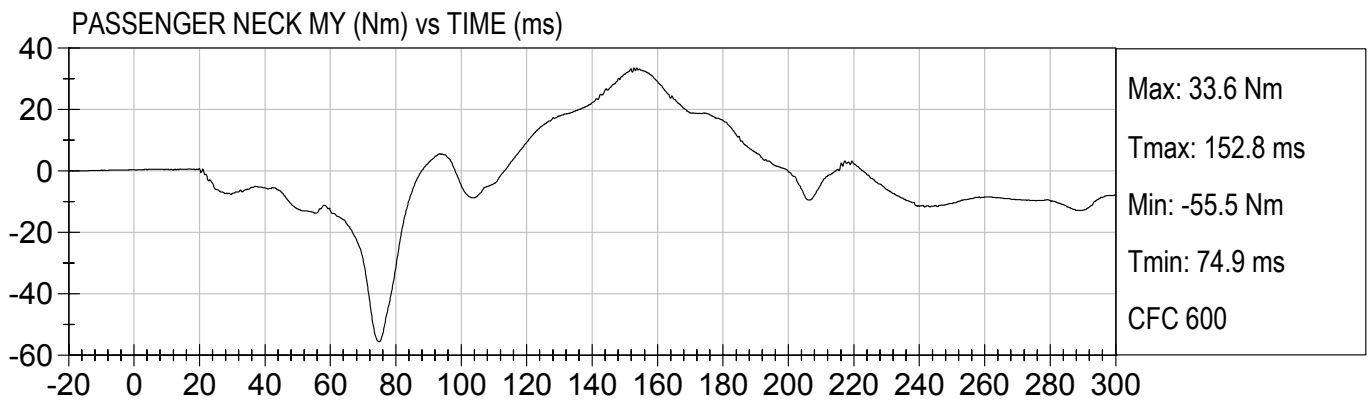
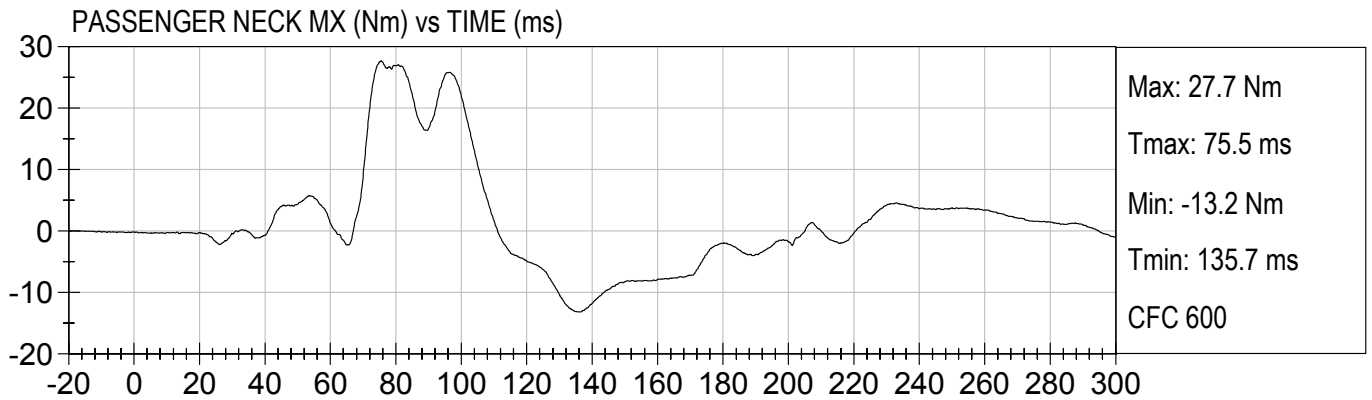


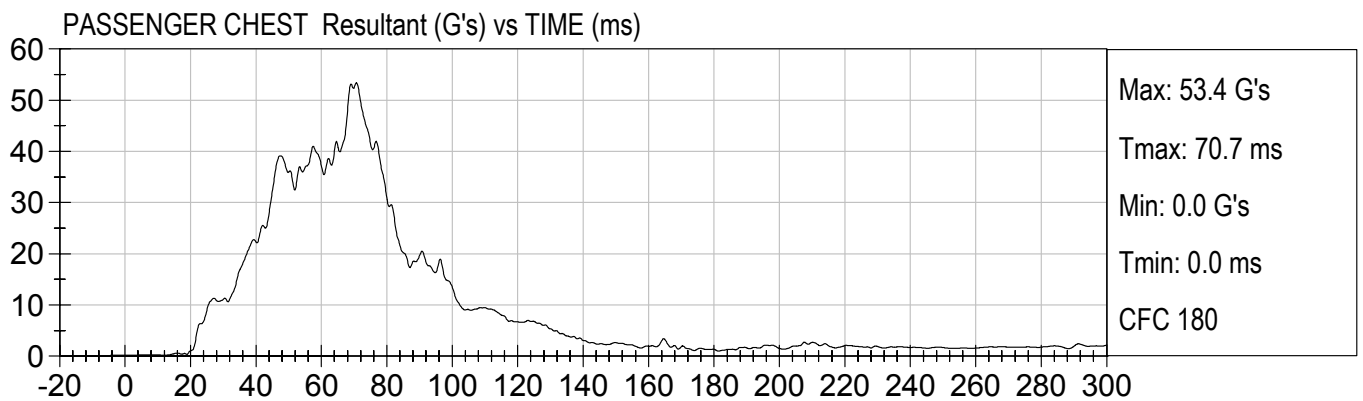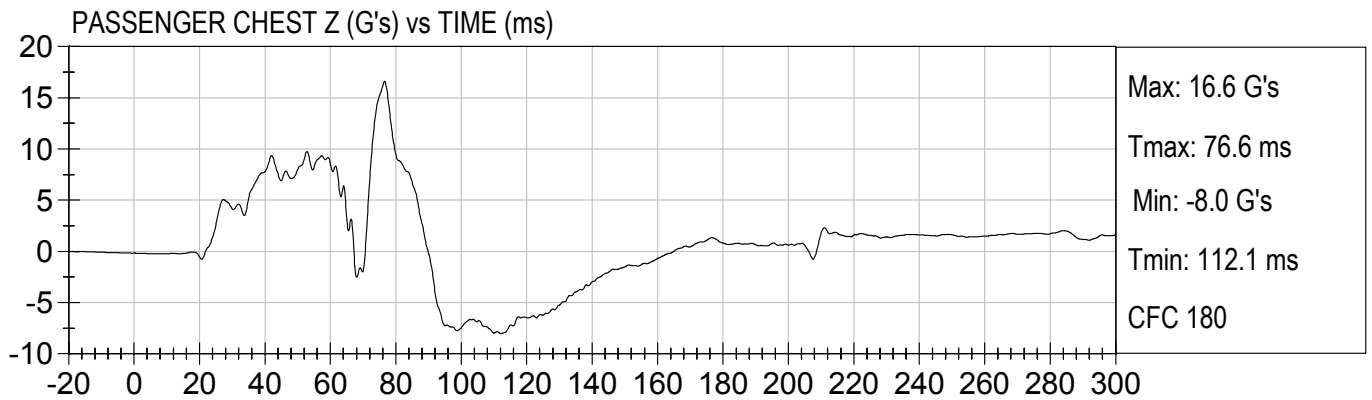
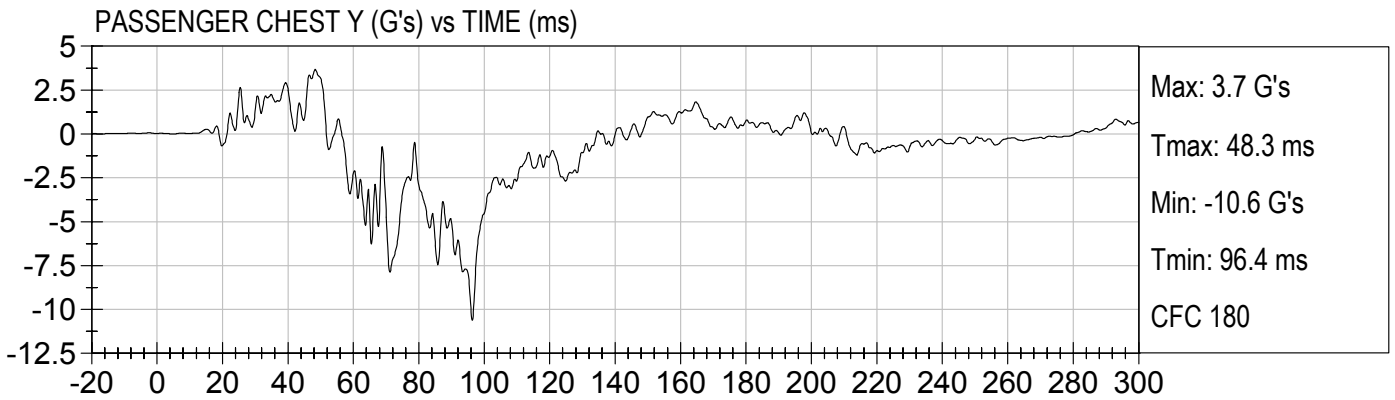
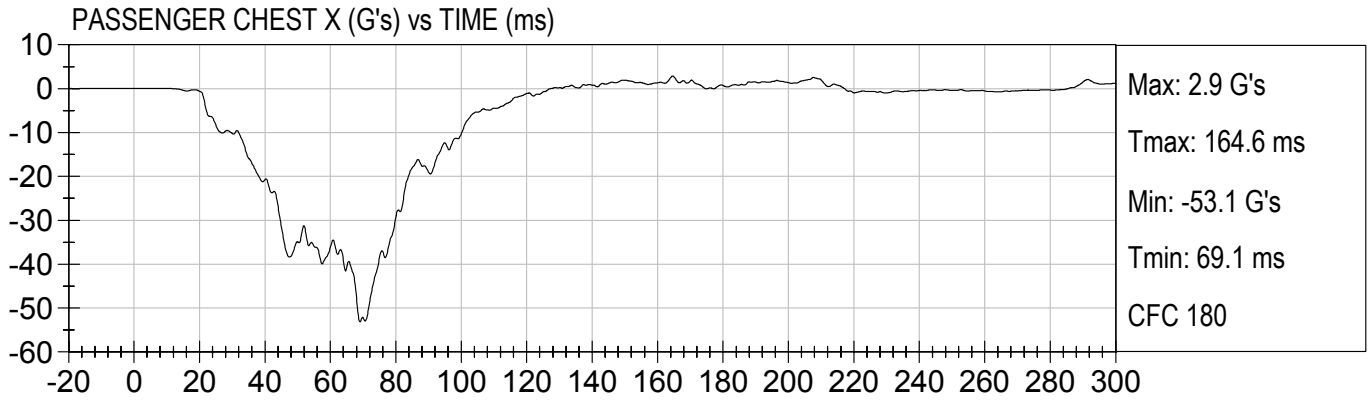


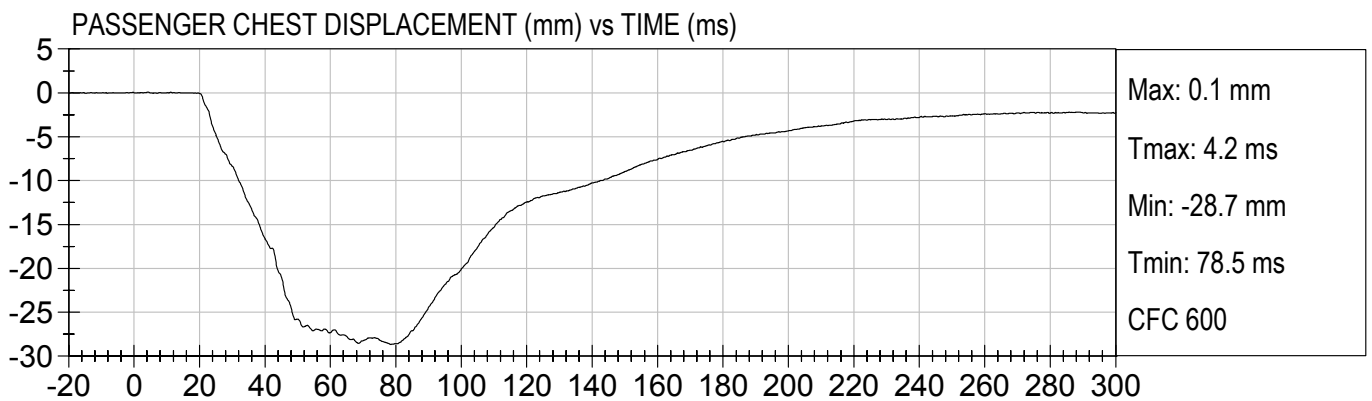
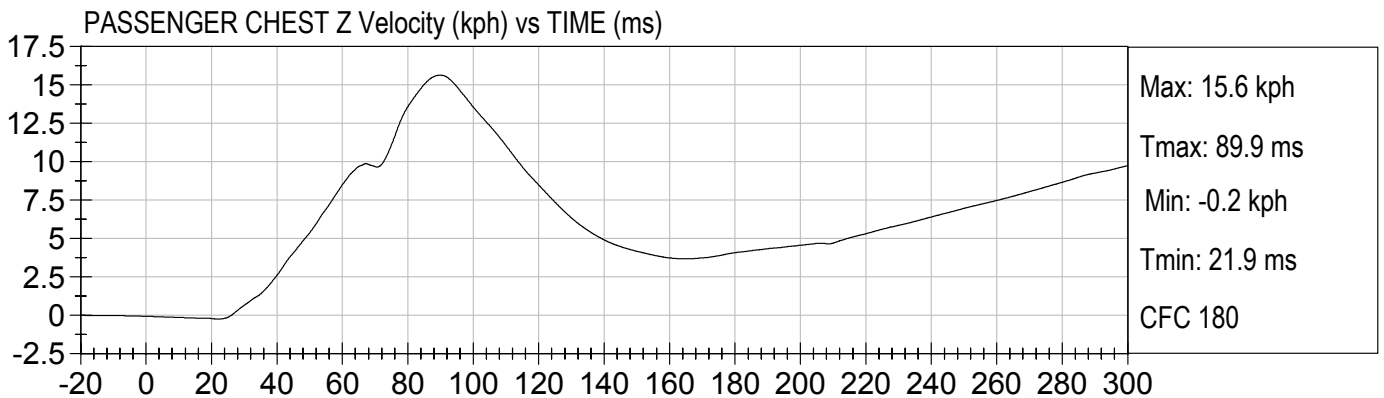
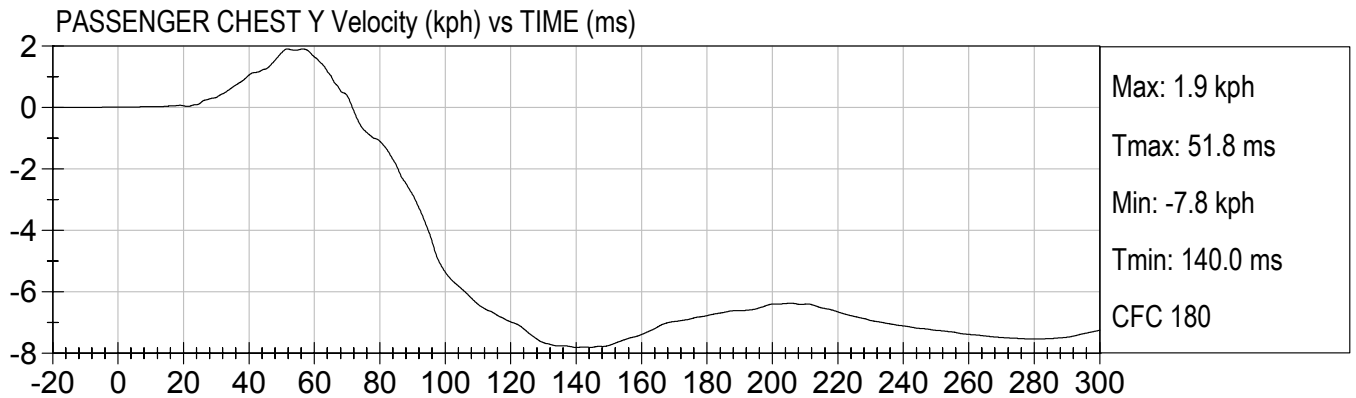
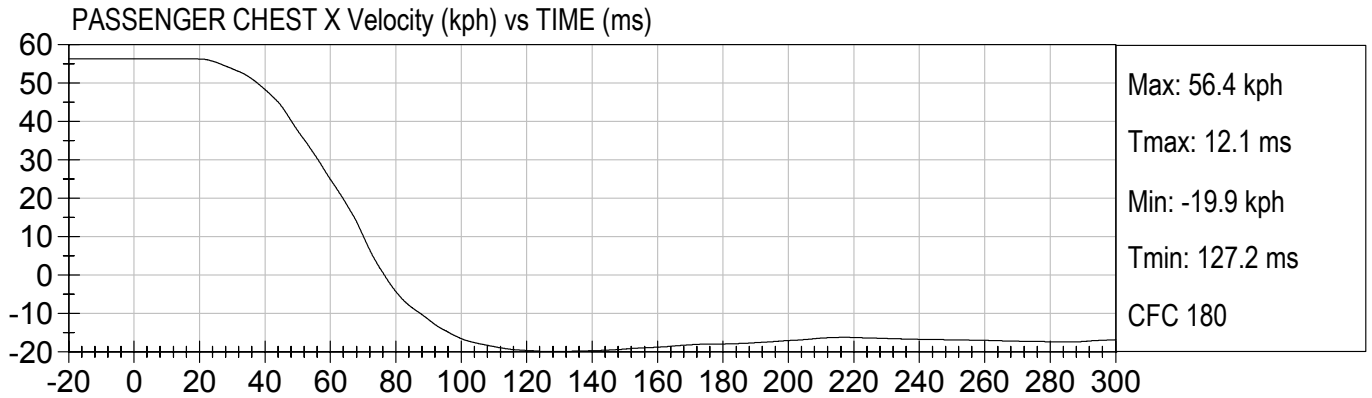


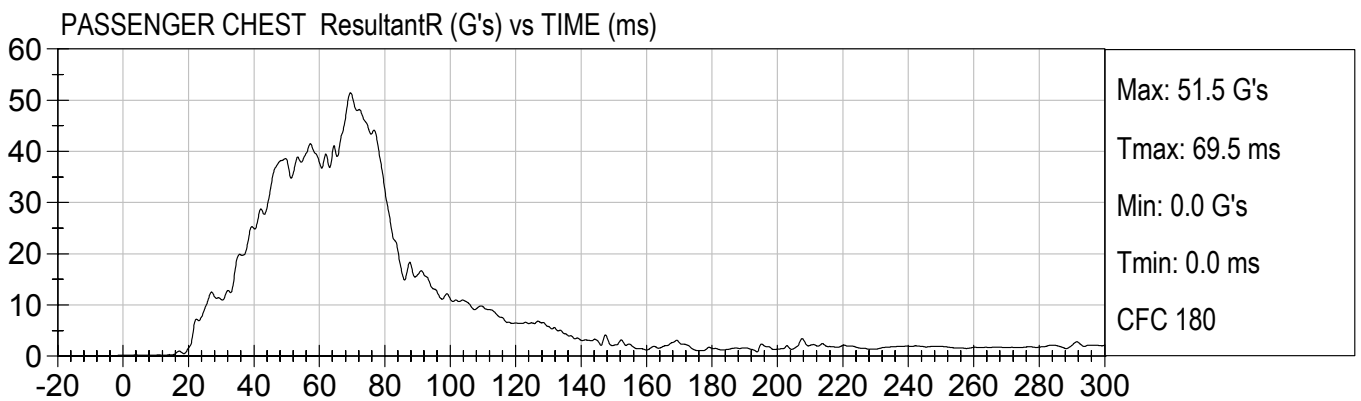
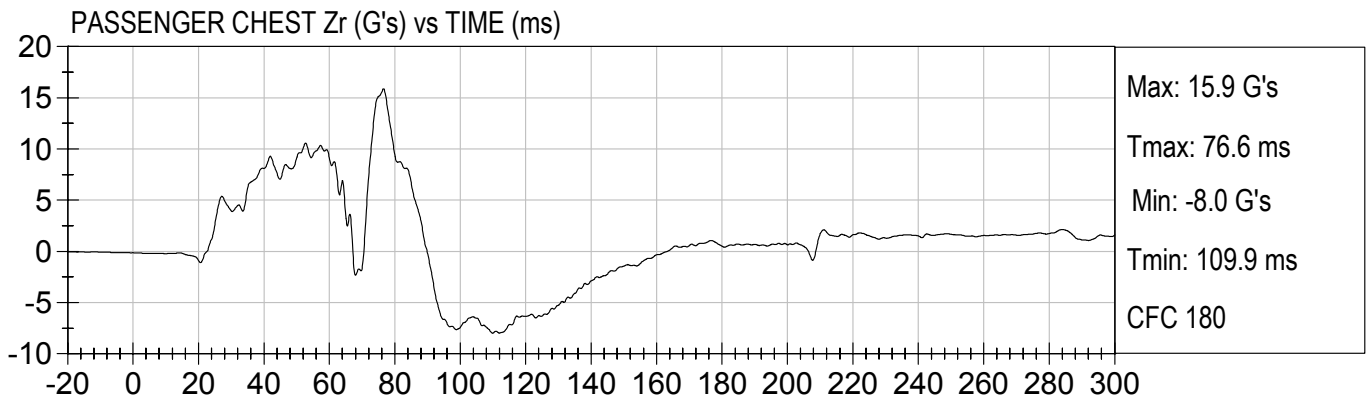
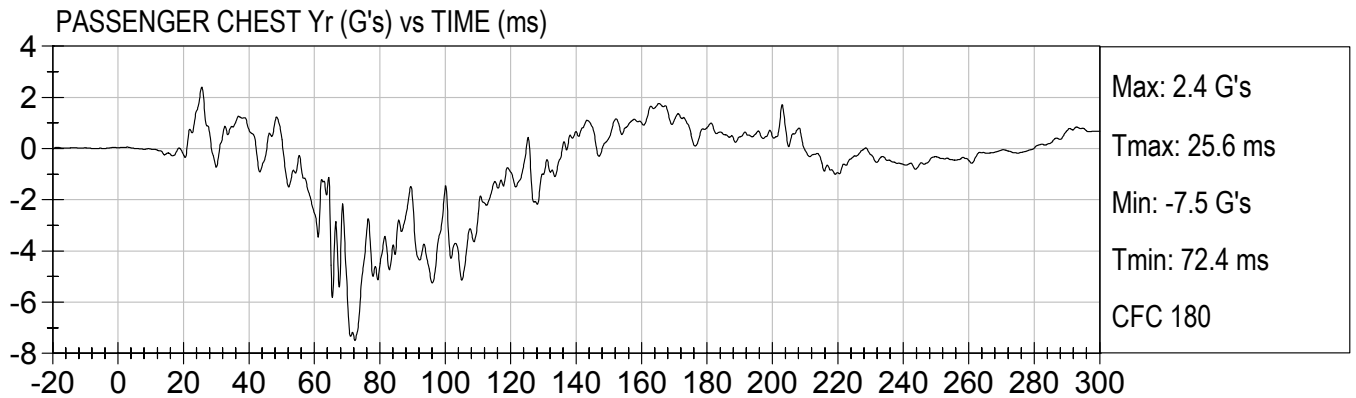
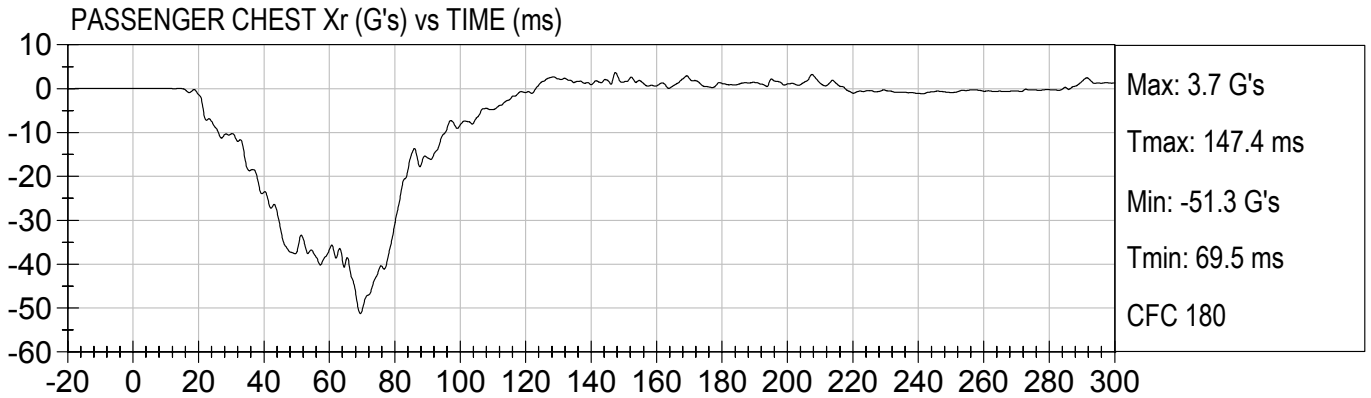


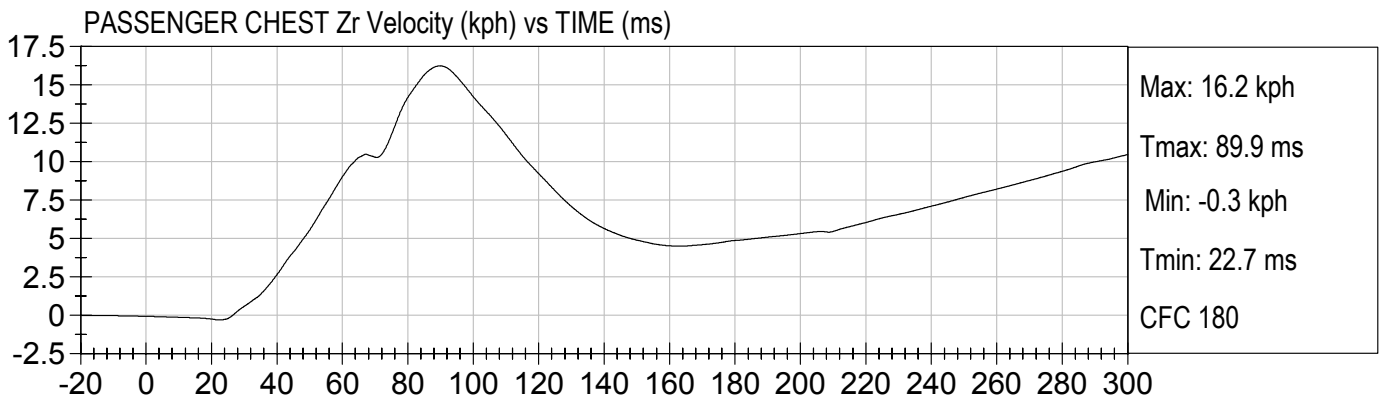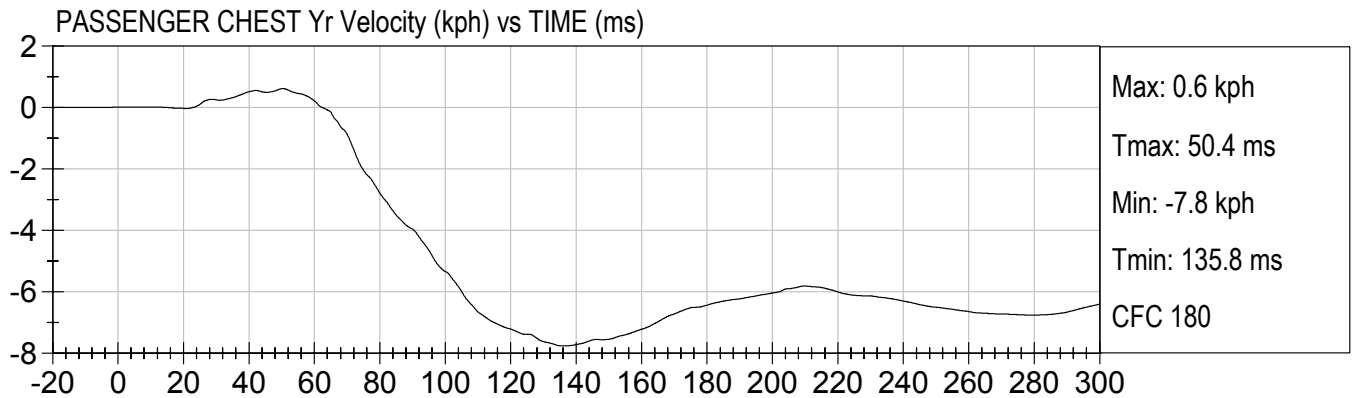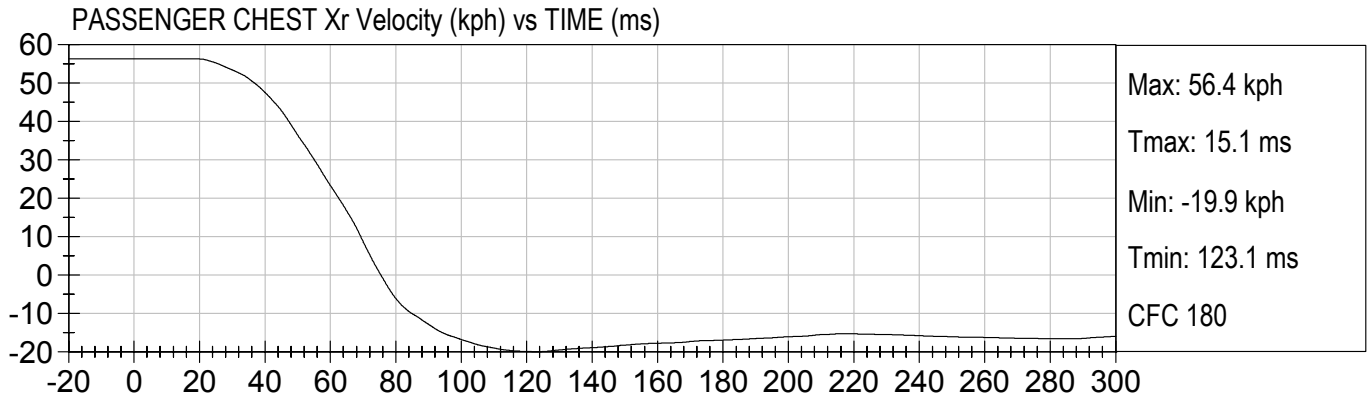

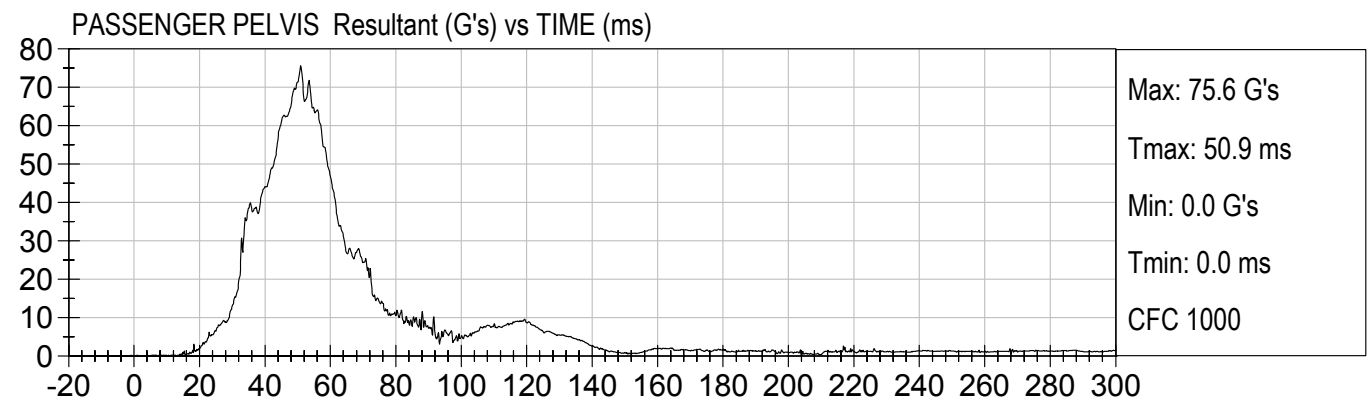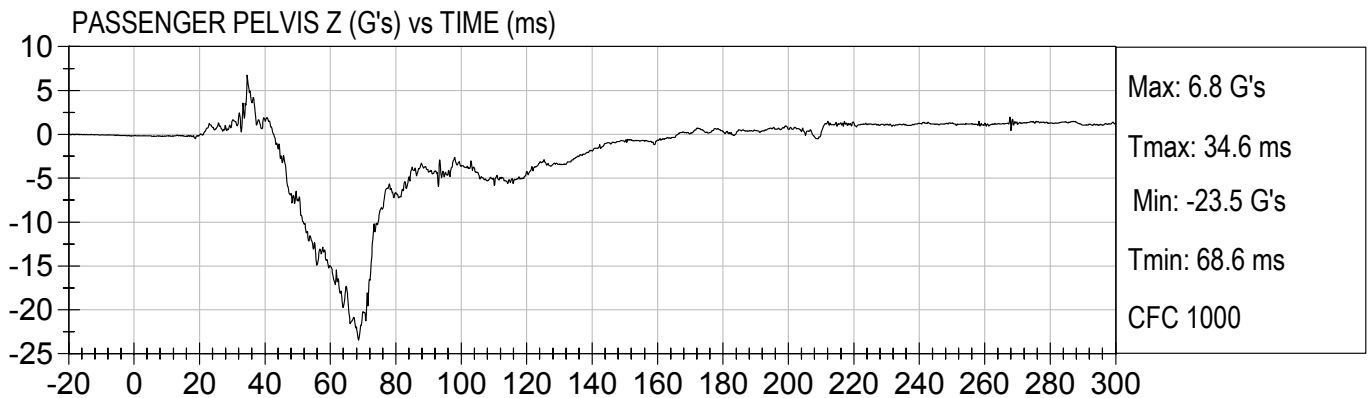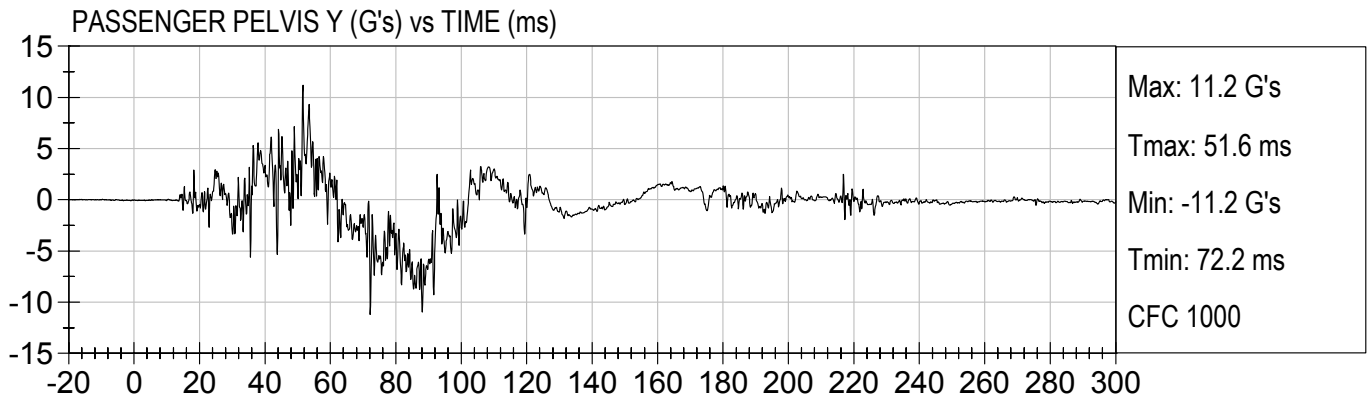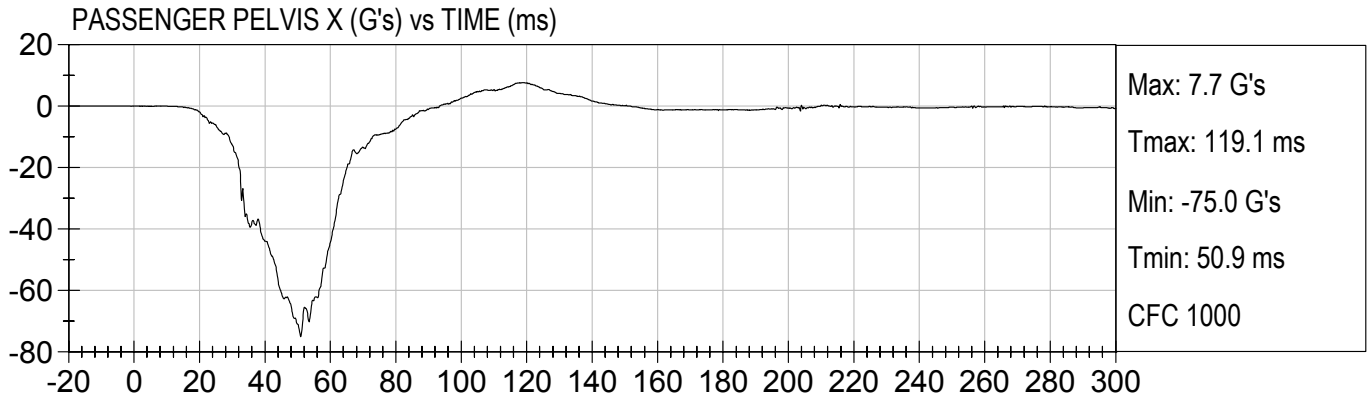

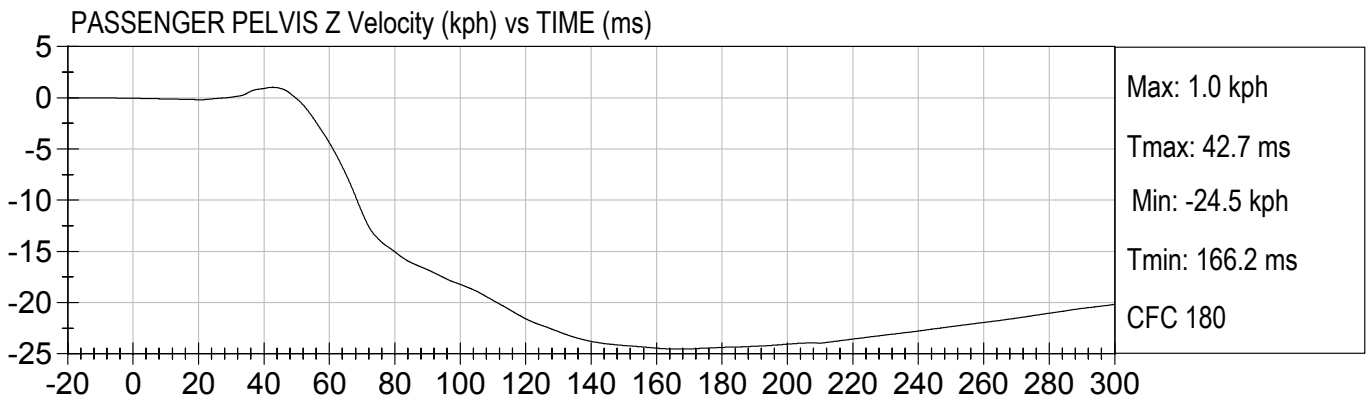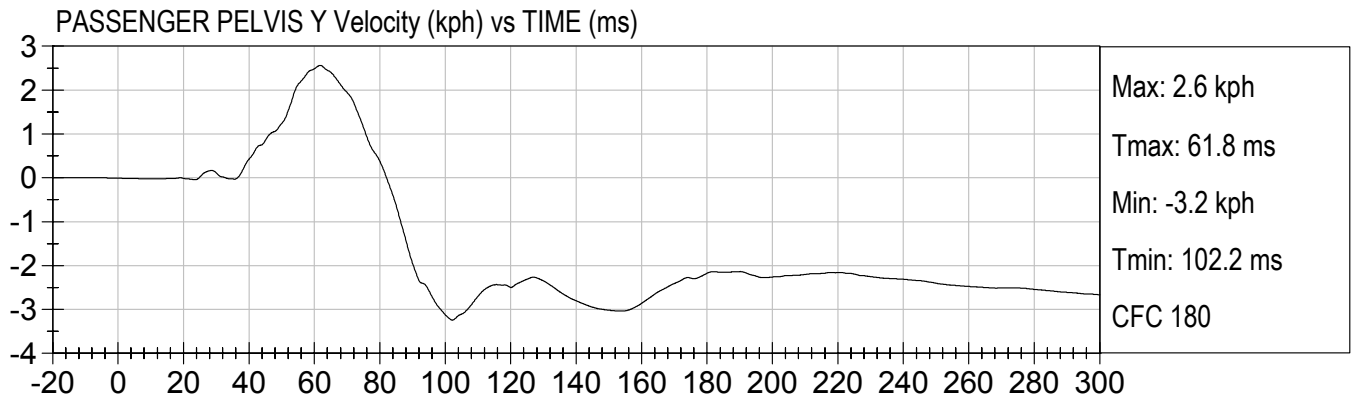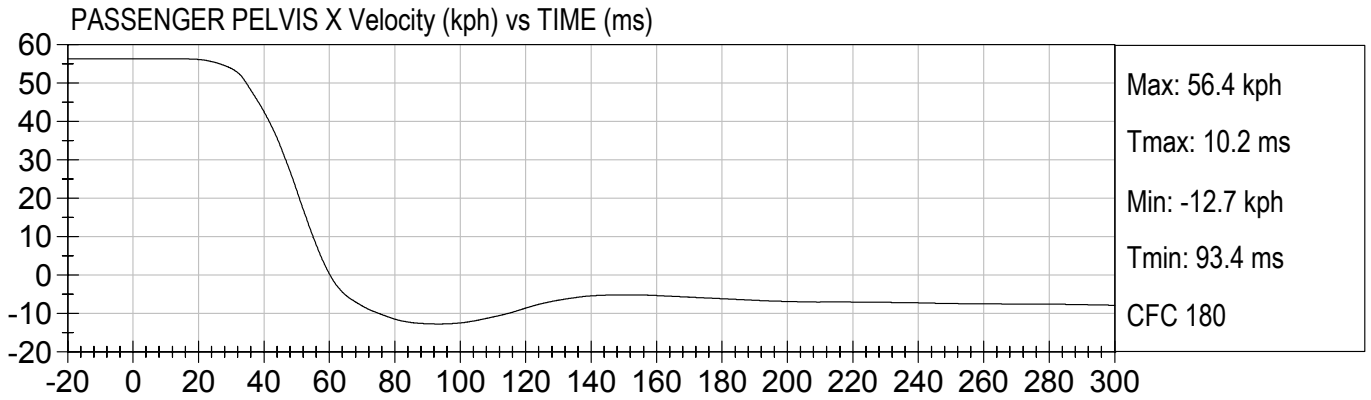


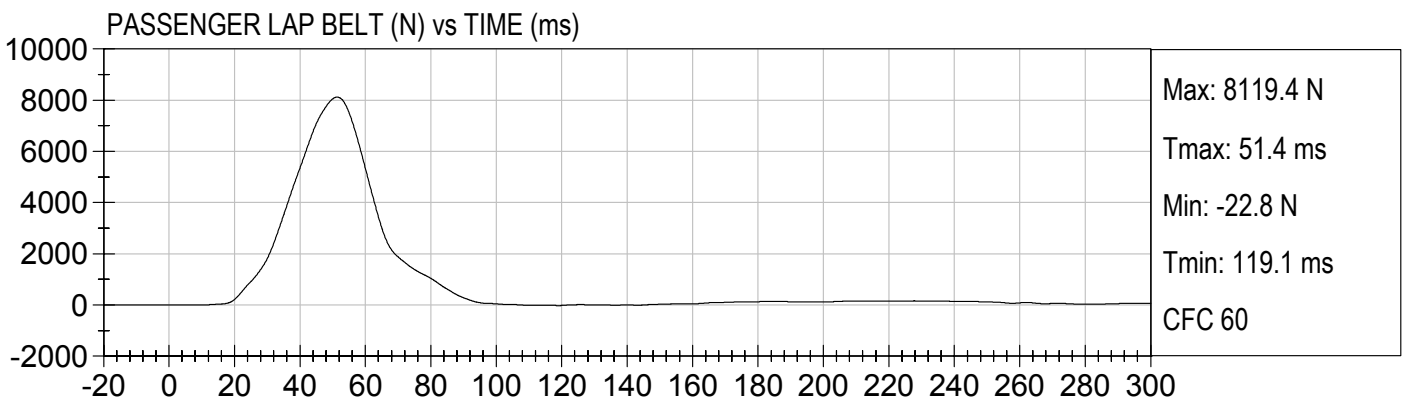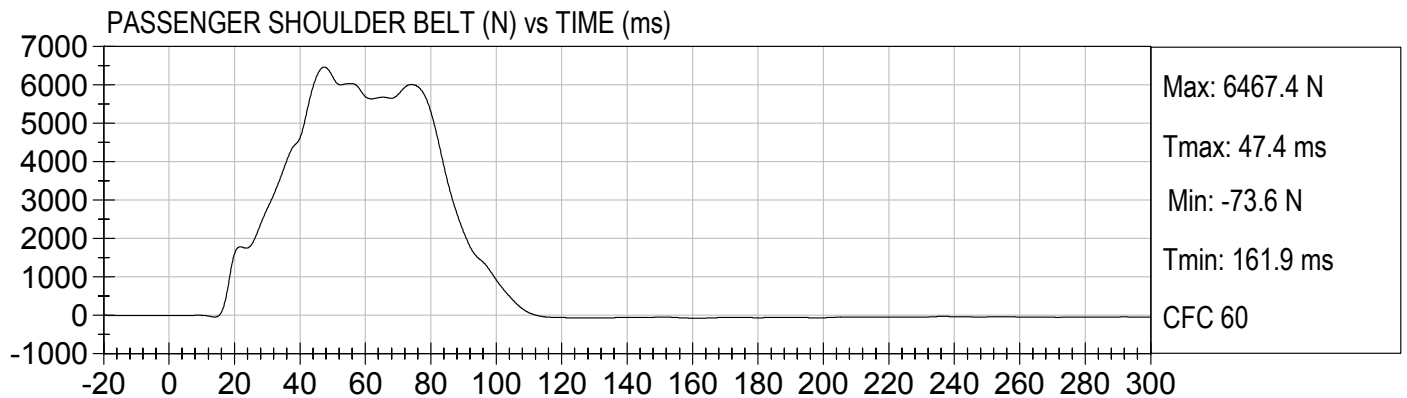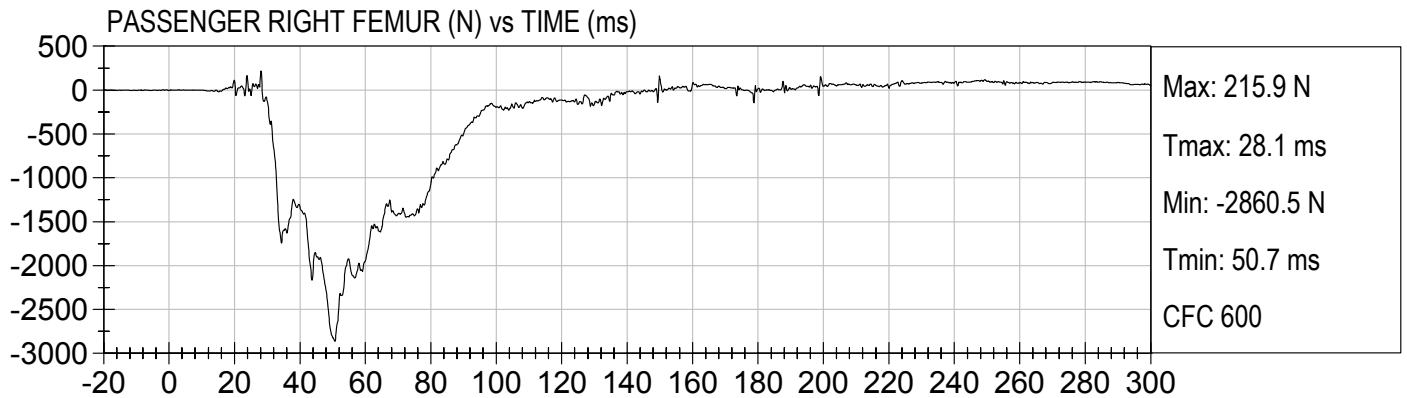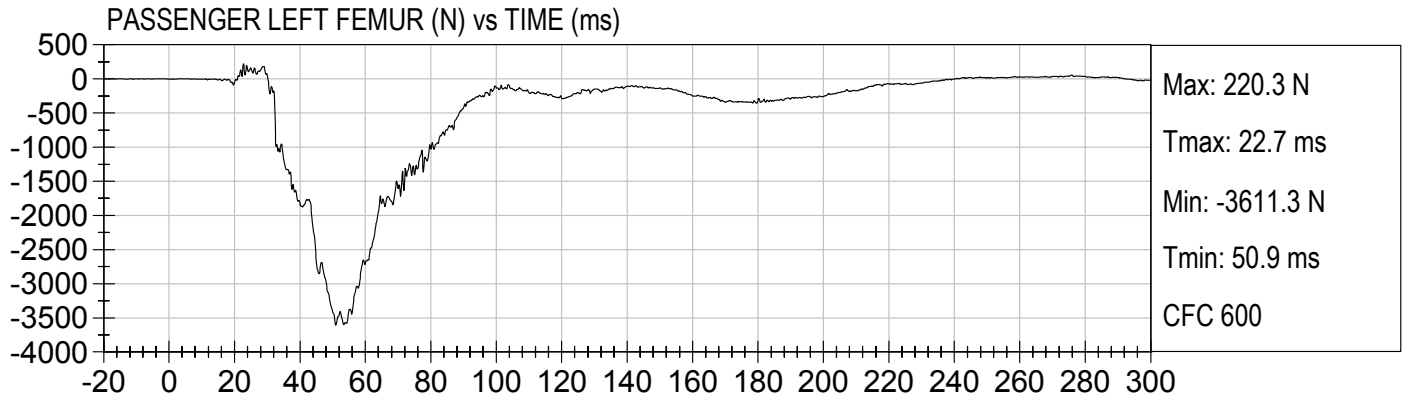

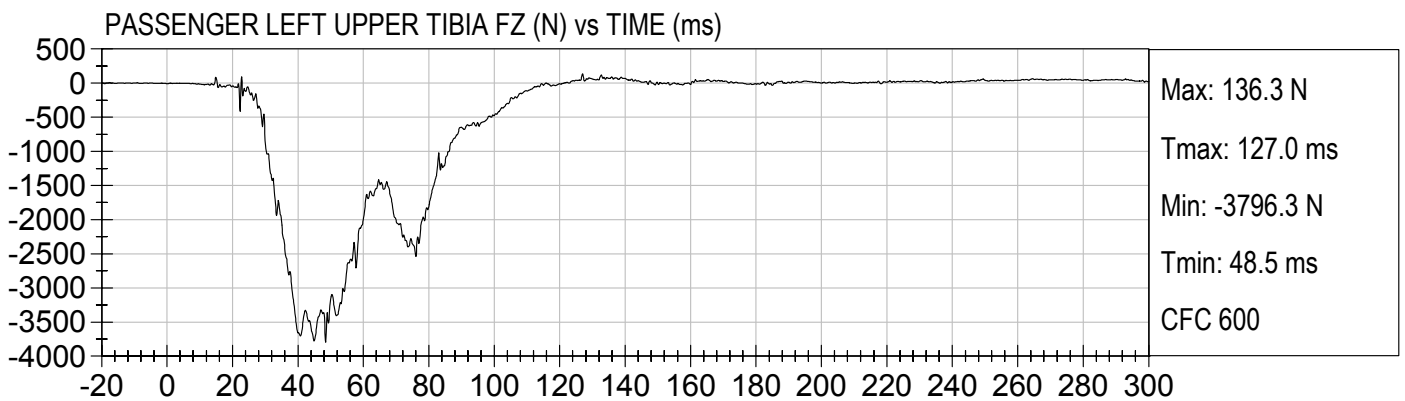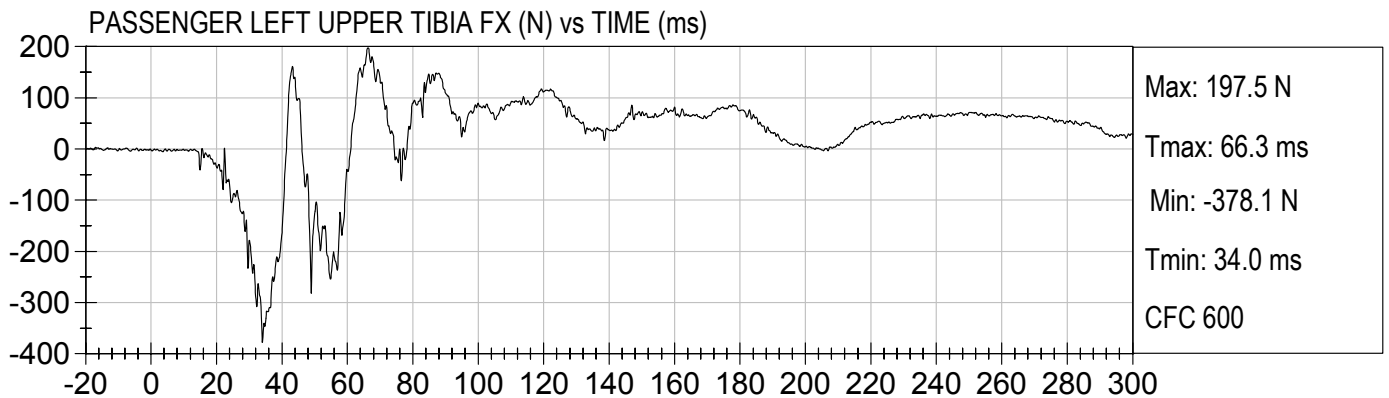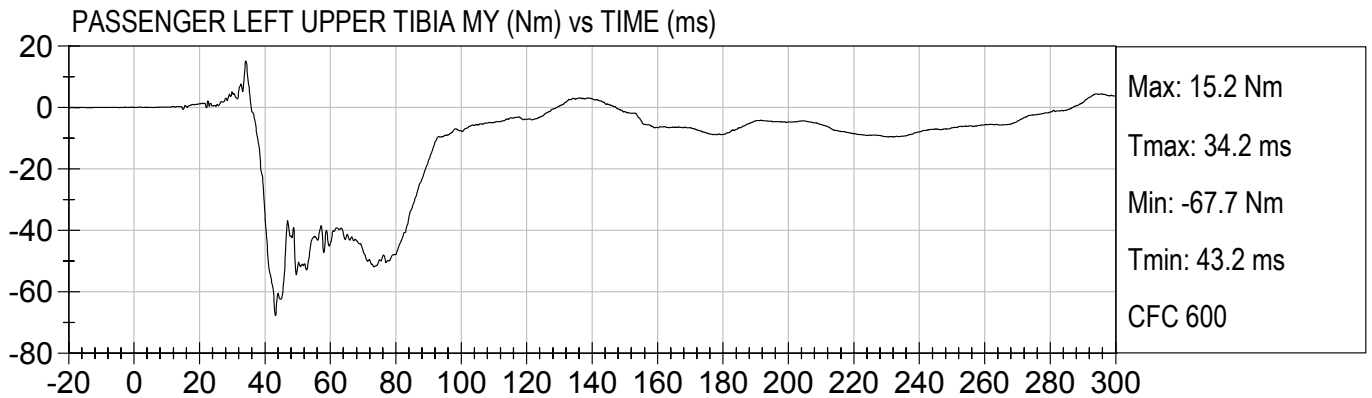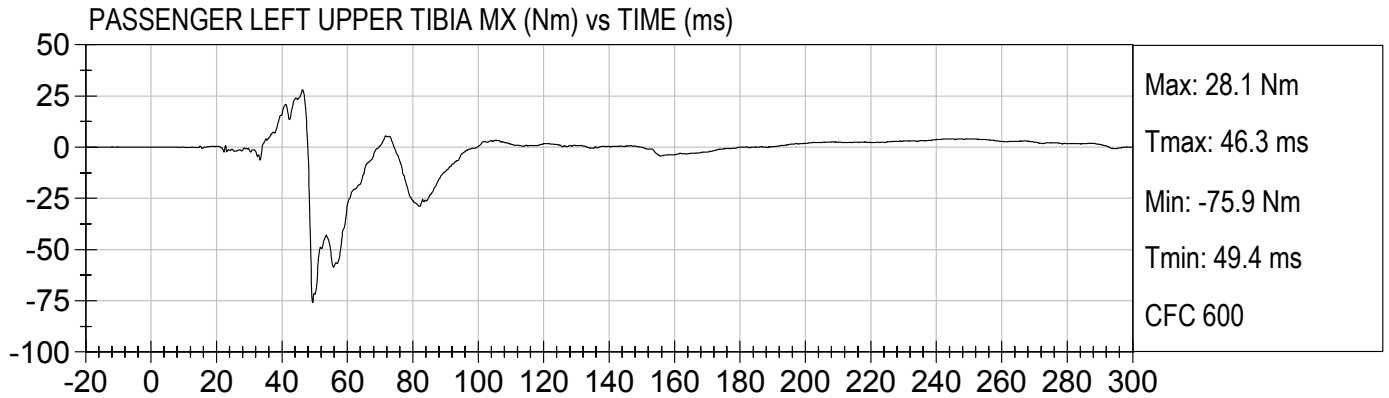





PASSENGER LEFT LOWER TIBIA MX (Nm) vs TIME (ms)

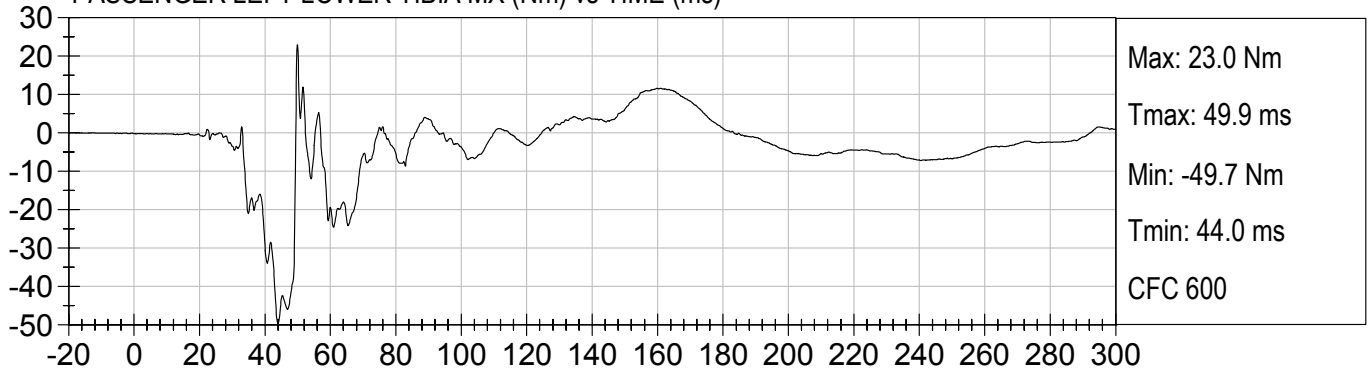


PASSENGER LEFT LOWER TIBIA MY (Nm) vs TIME (ms)




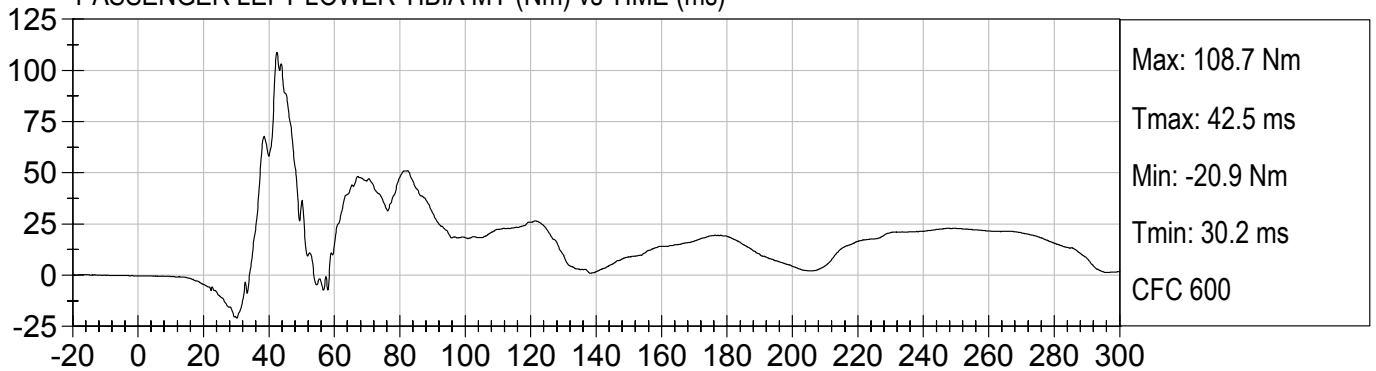






PASSENGER LEFT LOWER TIBIA FX (N) vs TIME (ms)



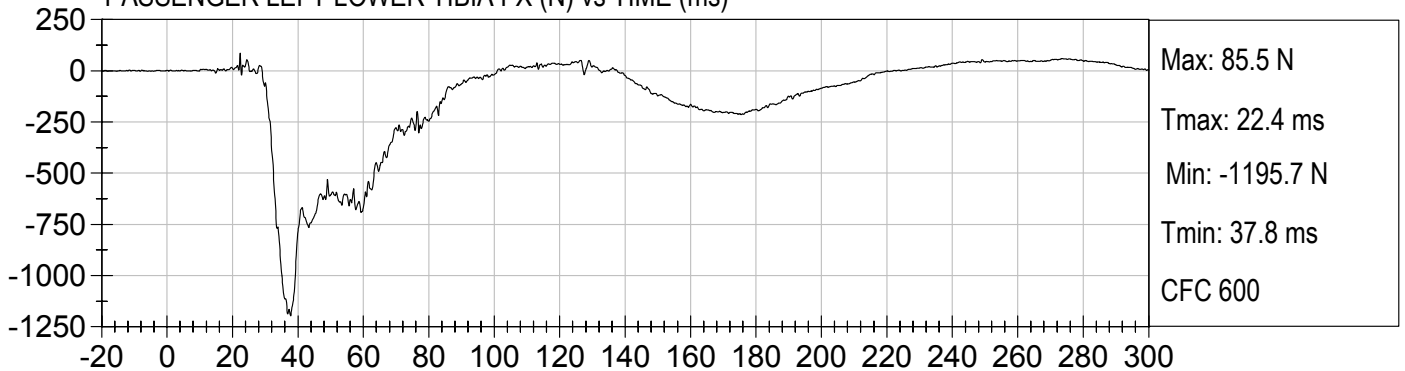





PASSENGER LEFT LOWER TIBIA FZ (N) vs TIME (ms)



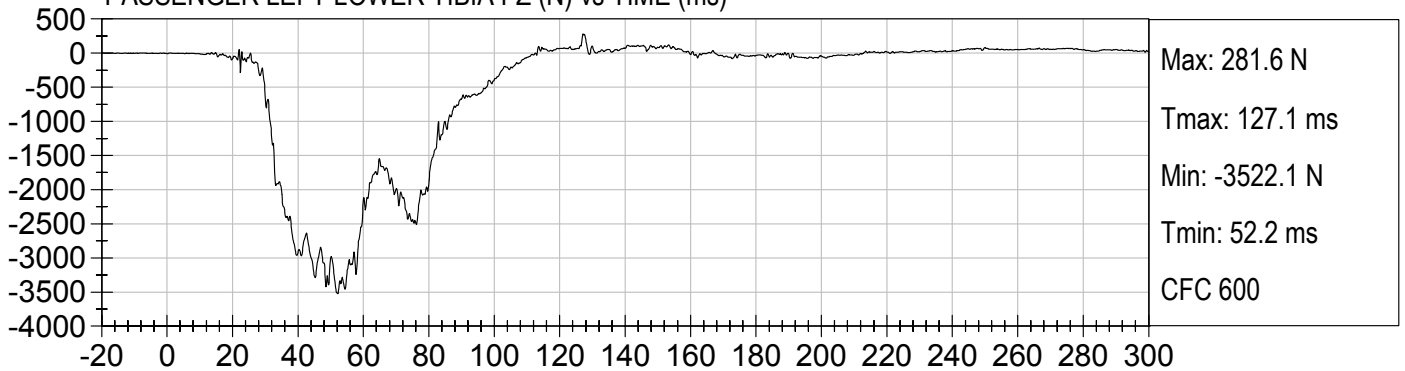


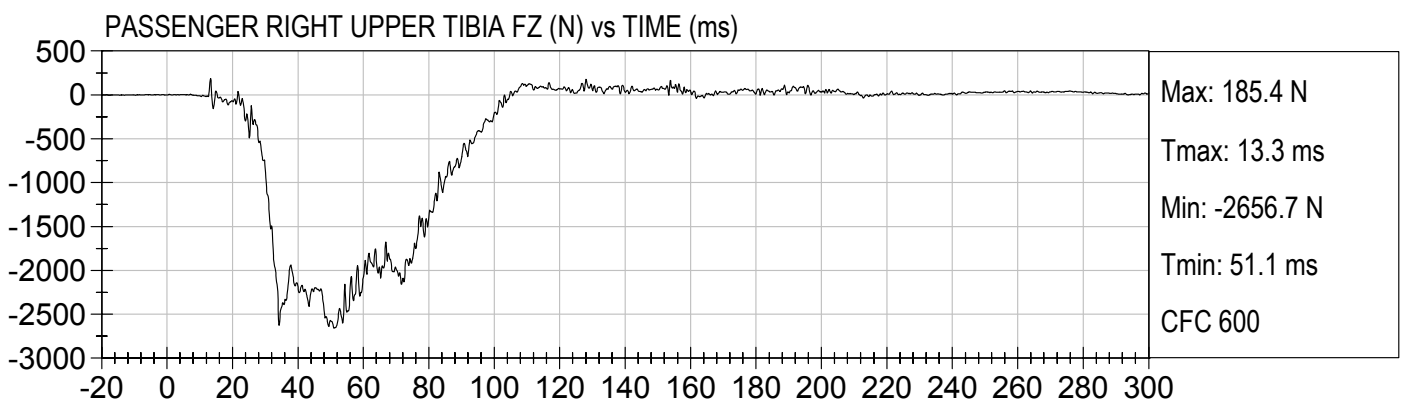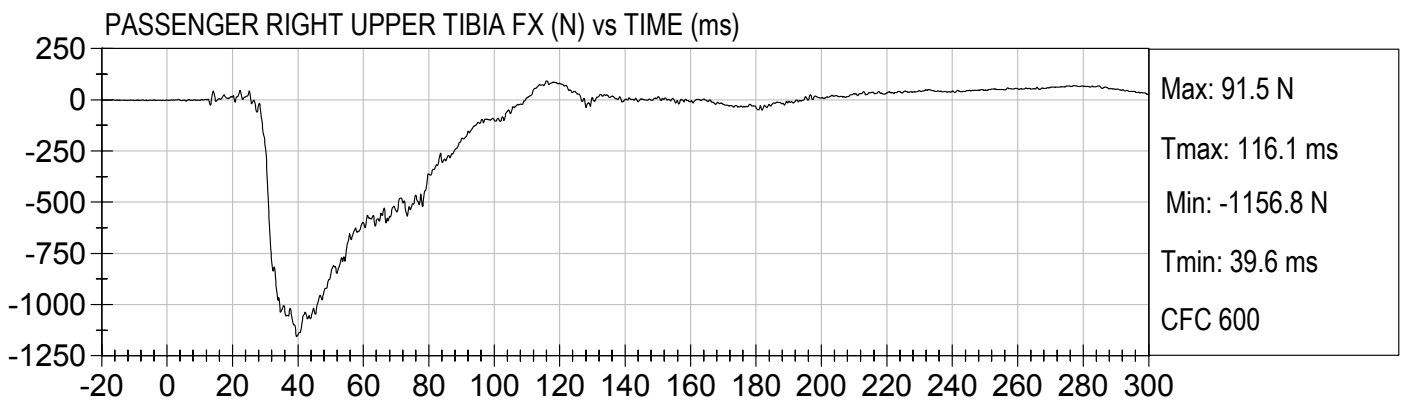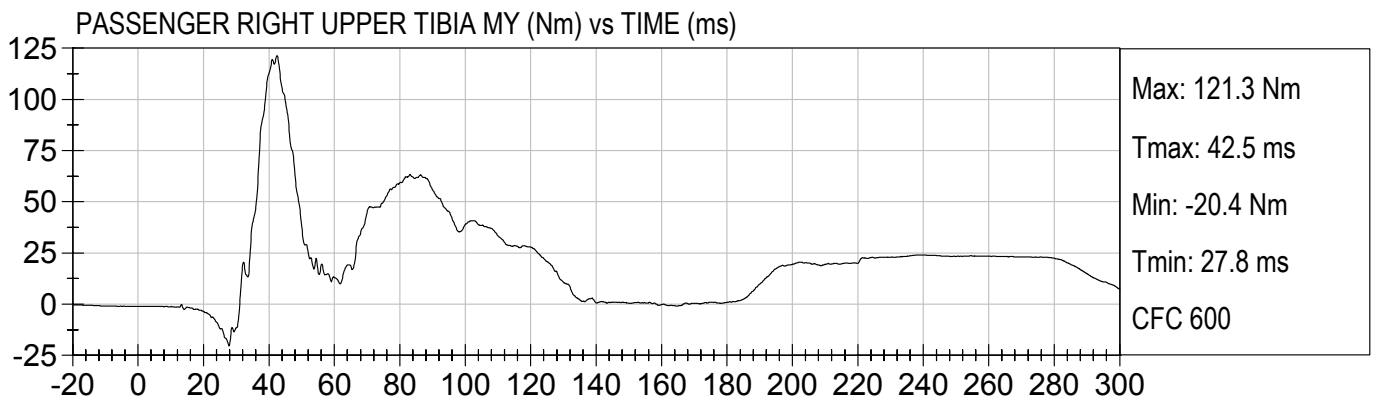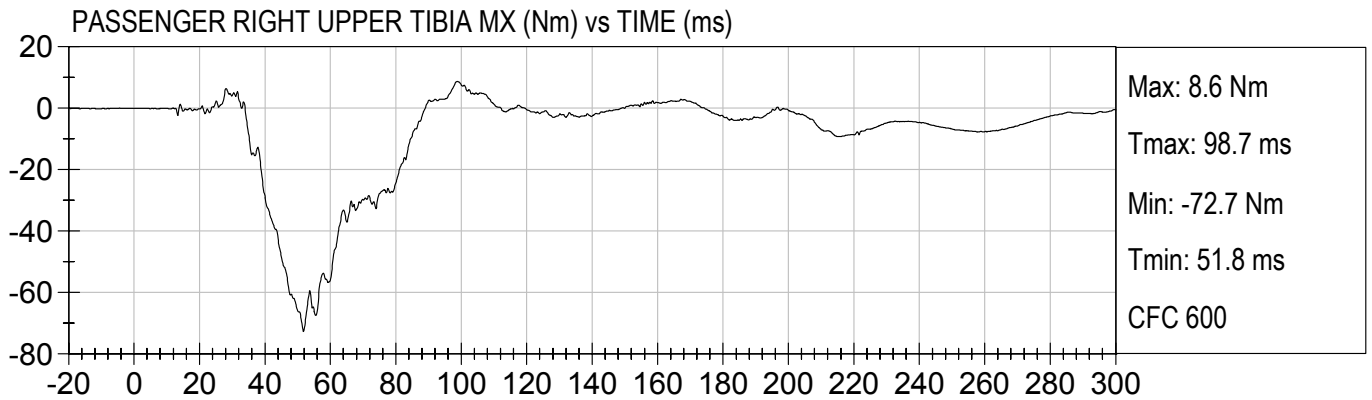

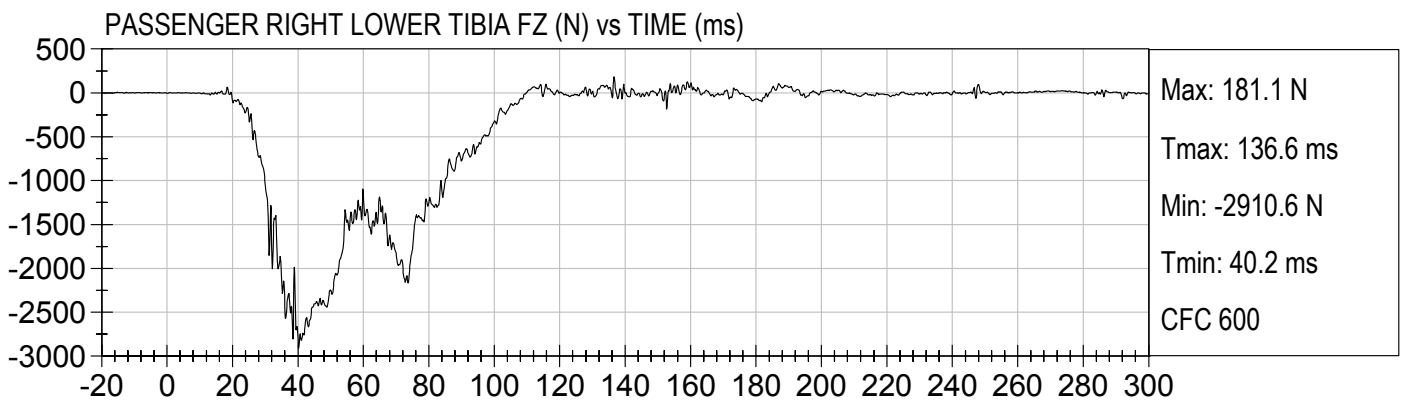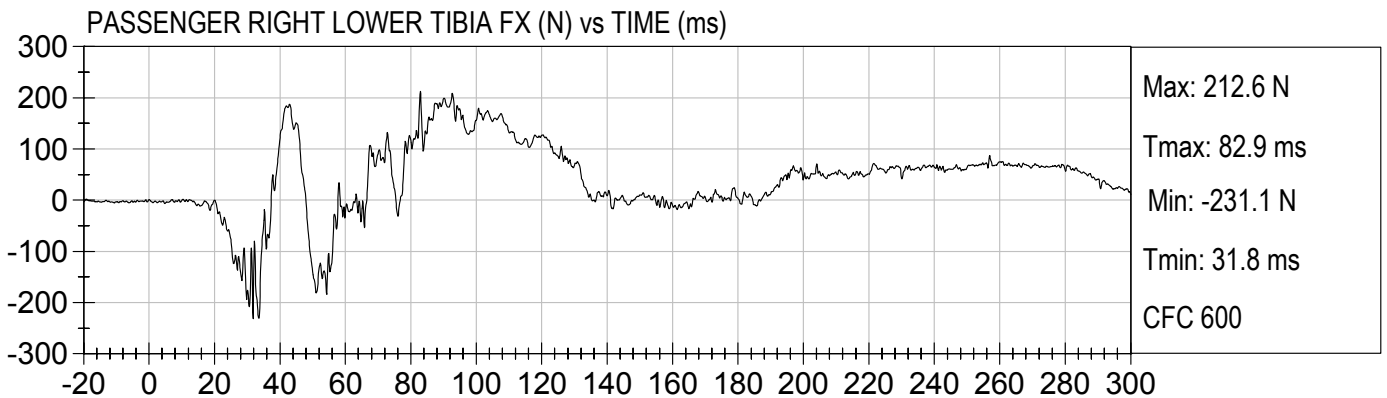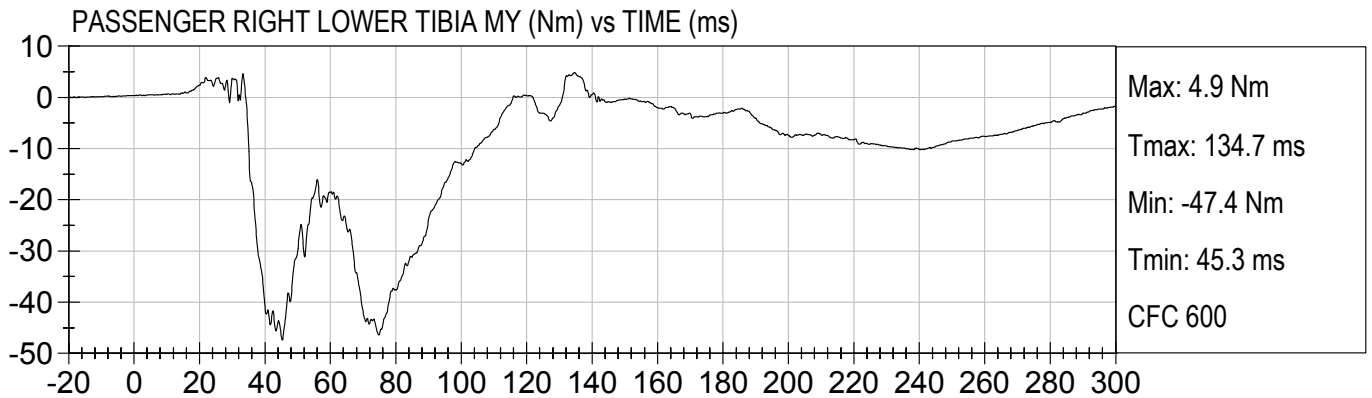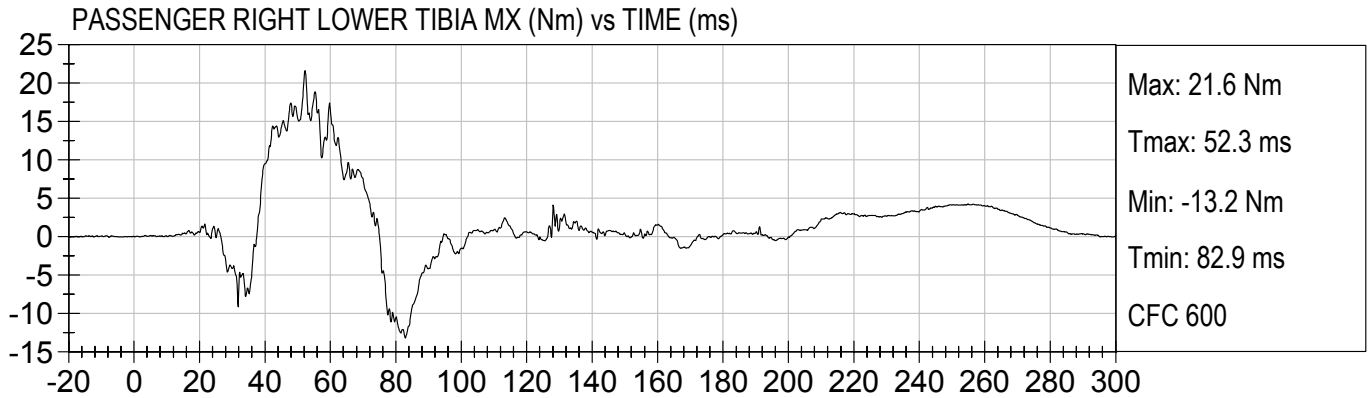

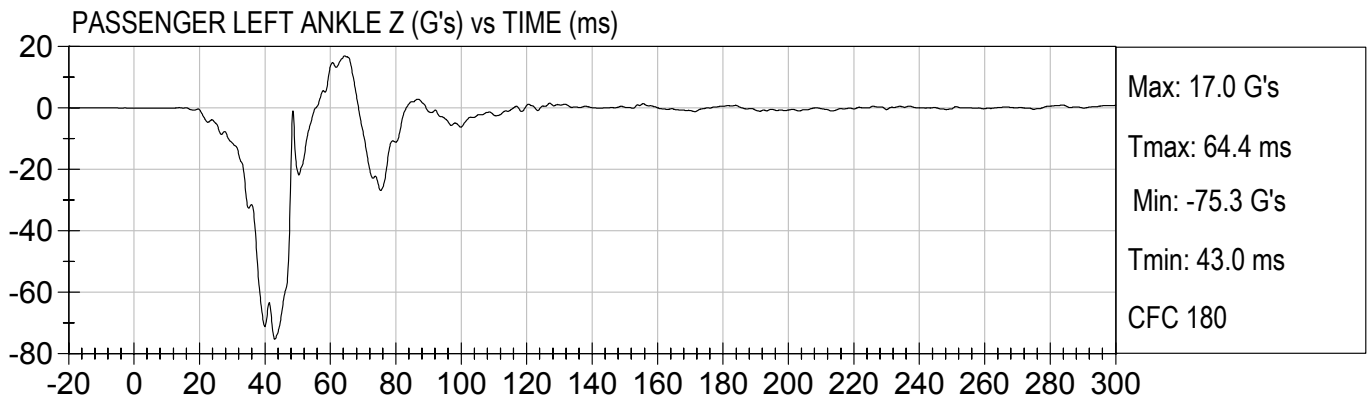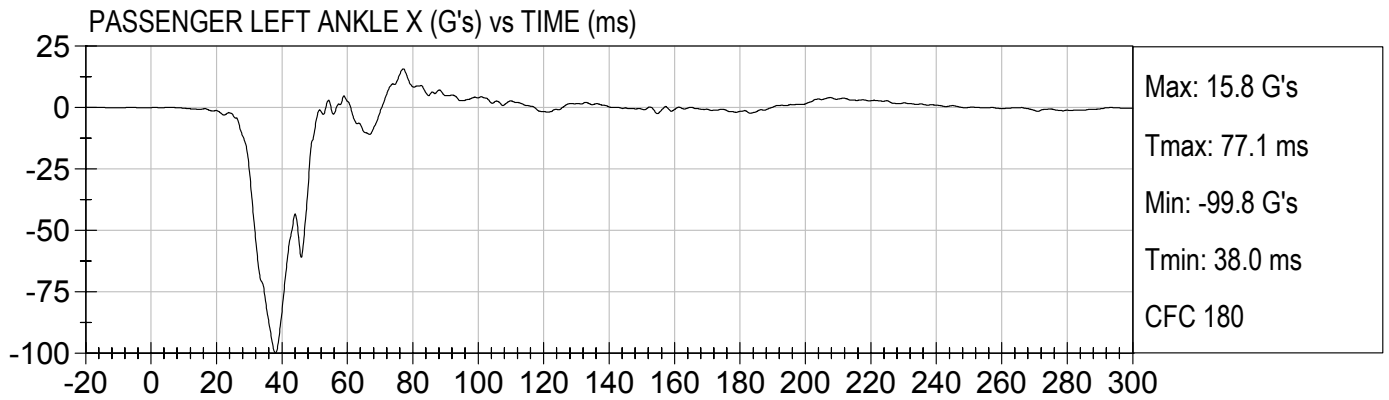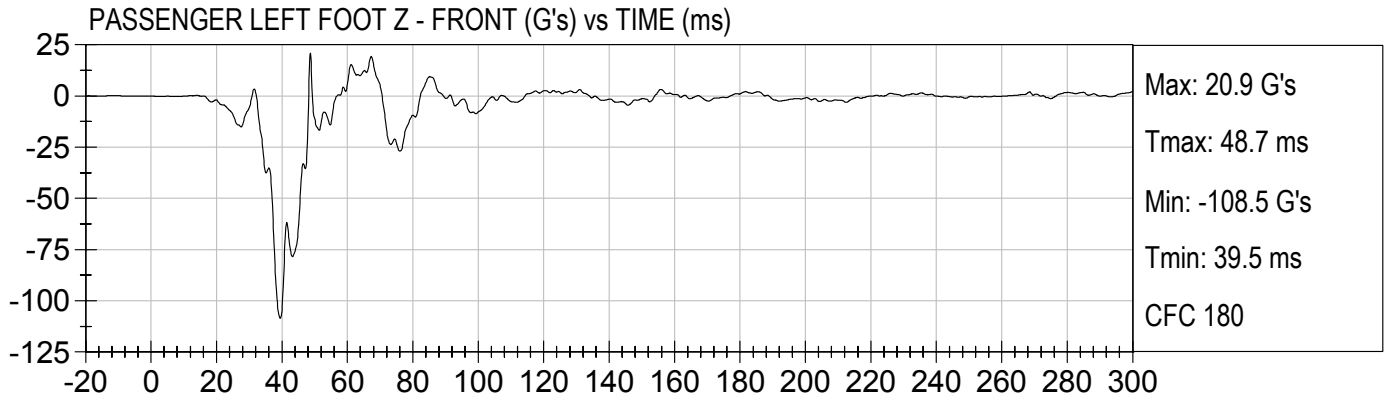


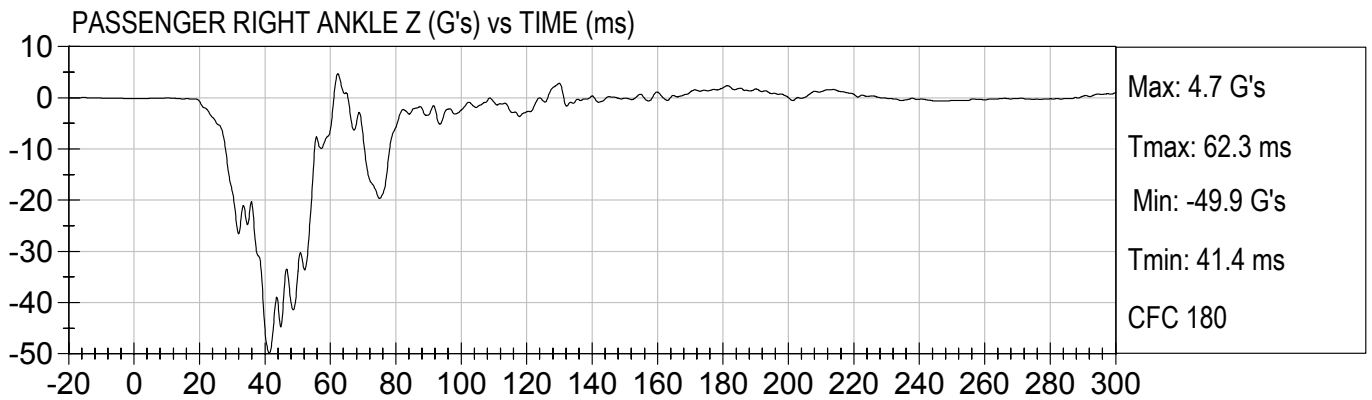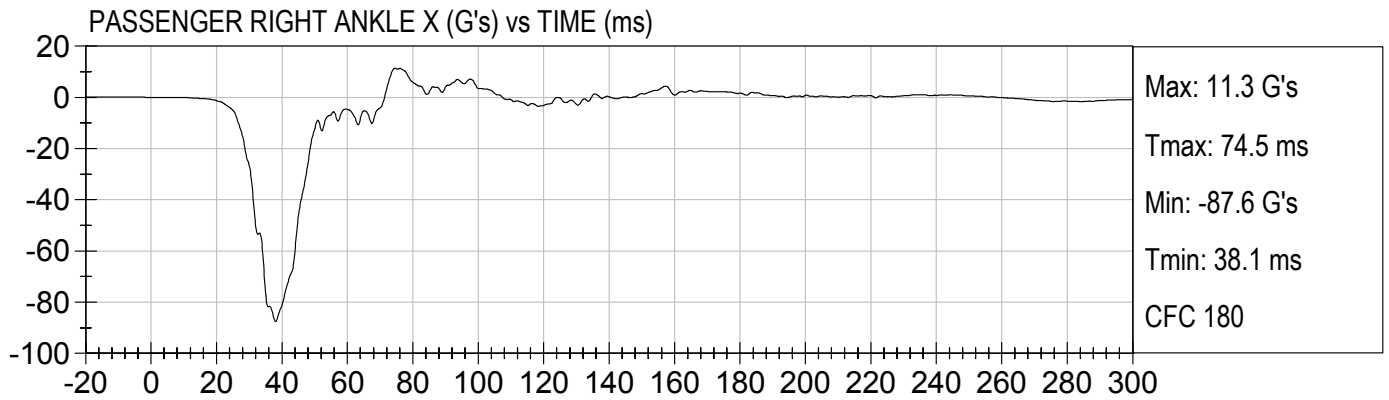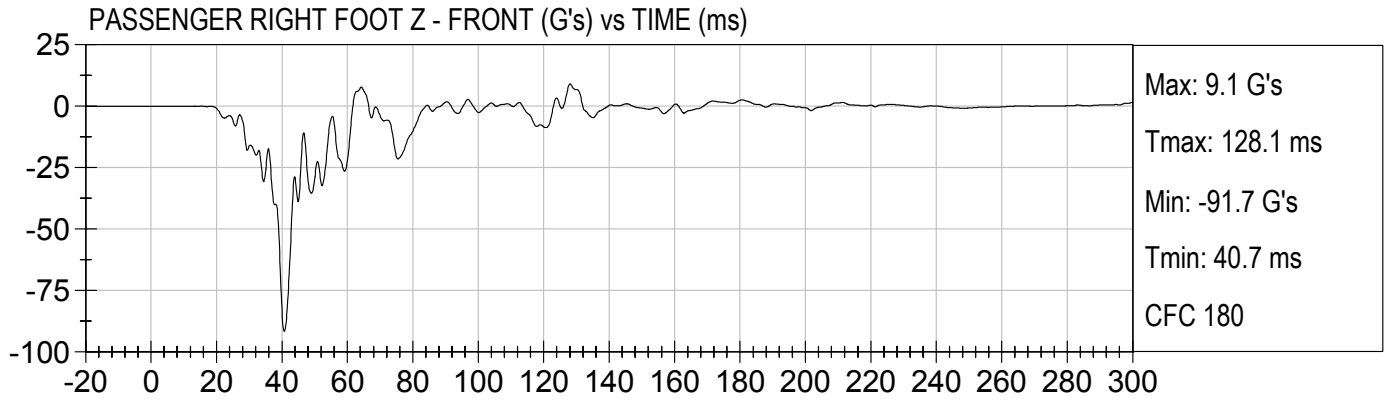

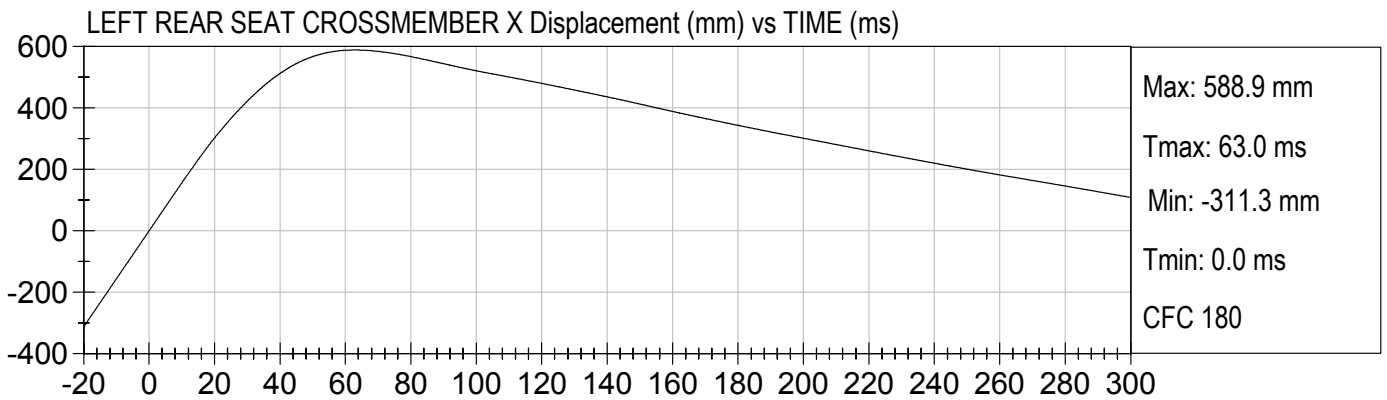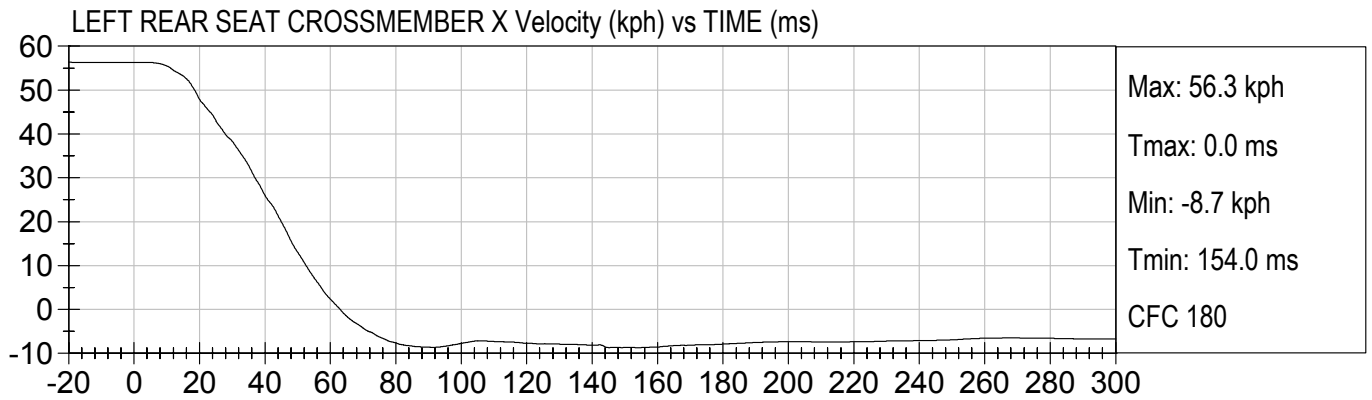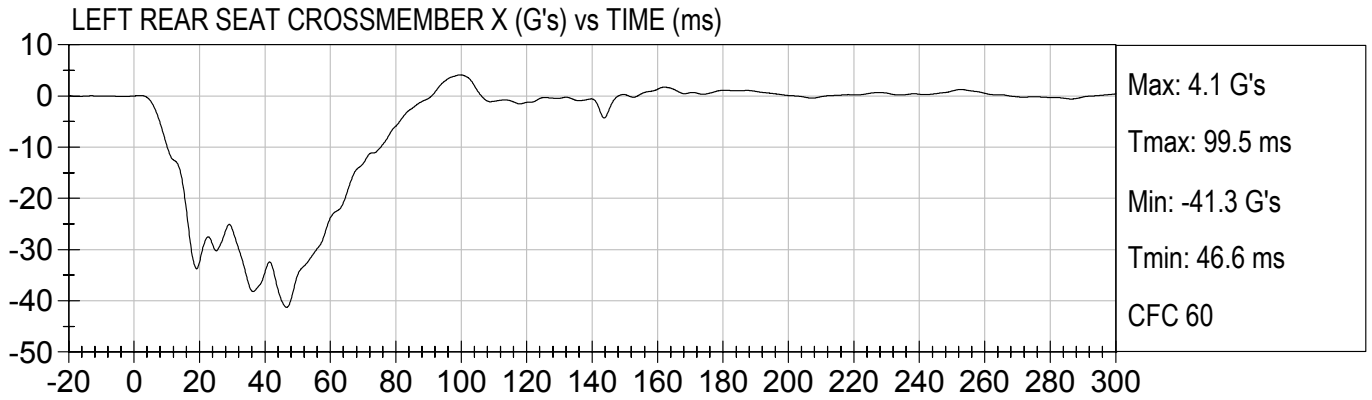





LEFT REAR SEAT CROSSMEMBER Z (G's) vs TIME (ms)



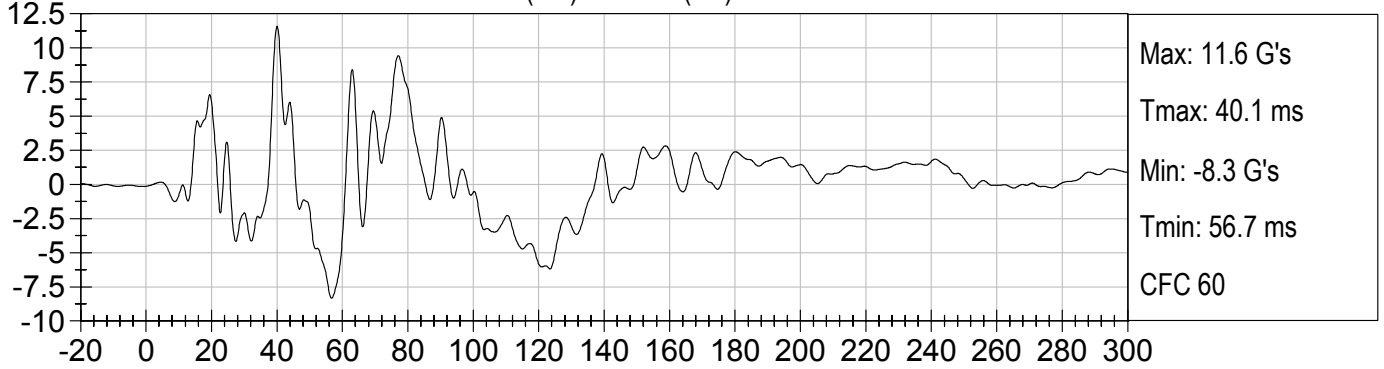





LEFT REAR SEAT CROSSMEMBER Z Velocity (kph) vs TIME (ms)



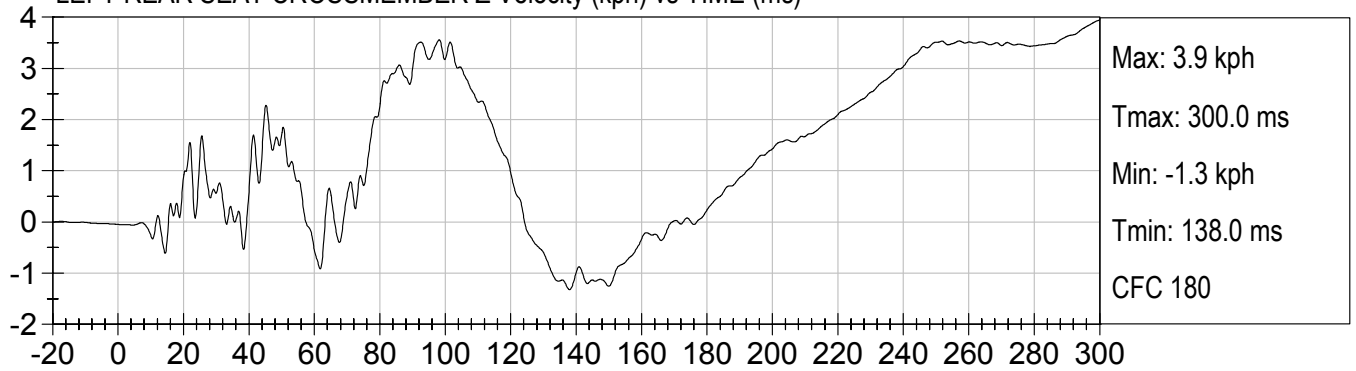





LEFT REAR SEAT CROSSMEMBER Z Displacement (mm) vs TIME (ms)



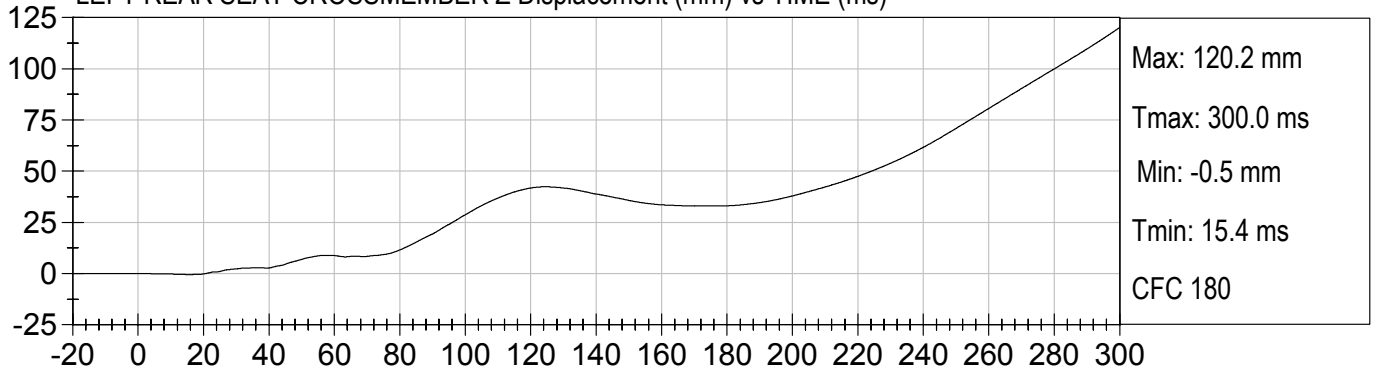


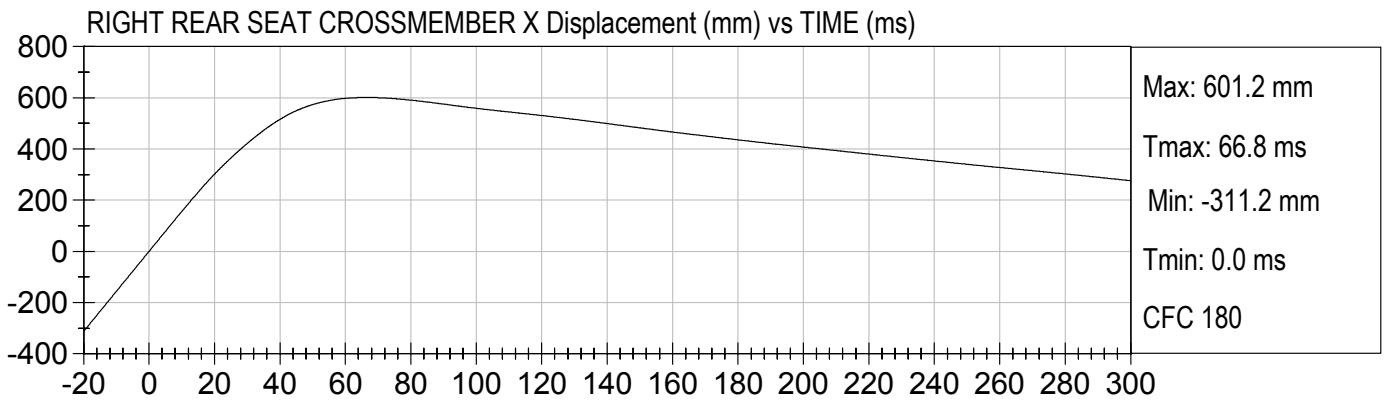
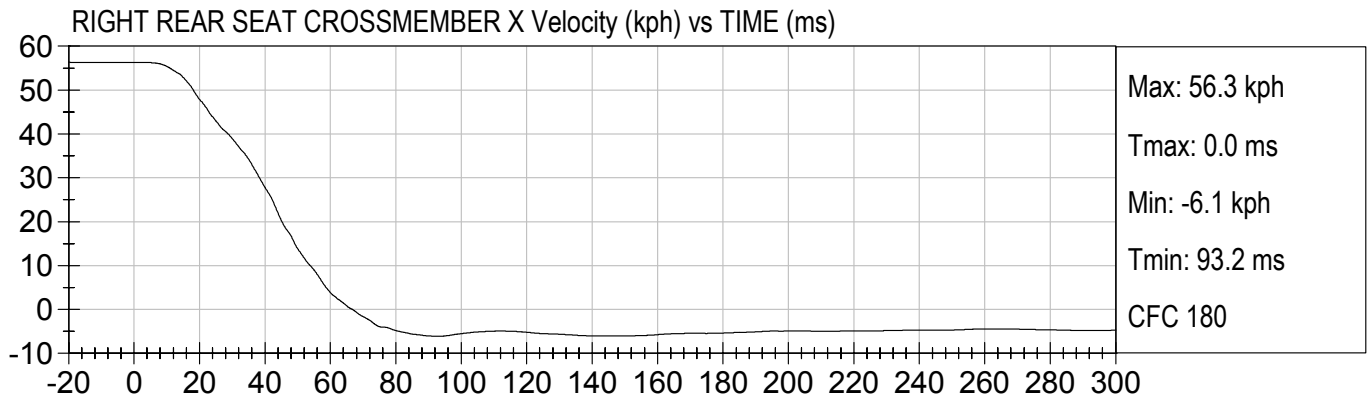
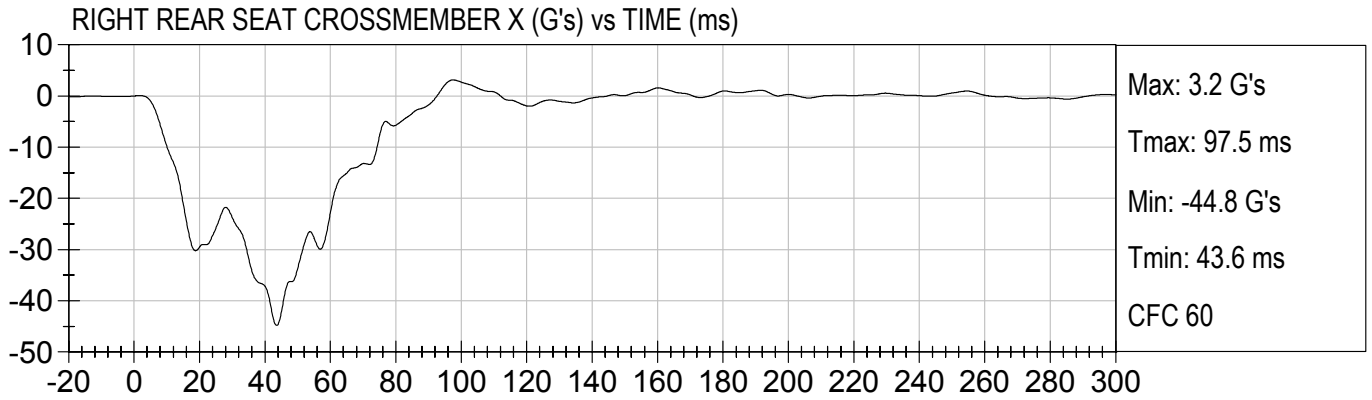


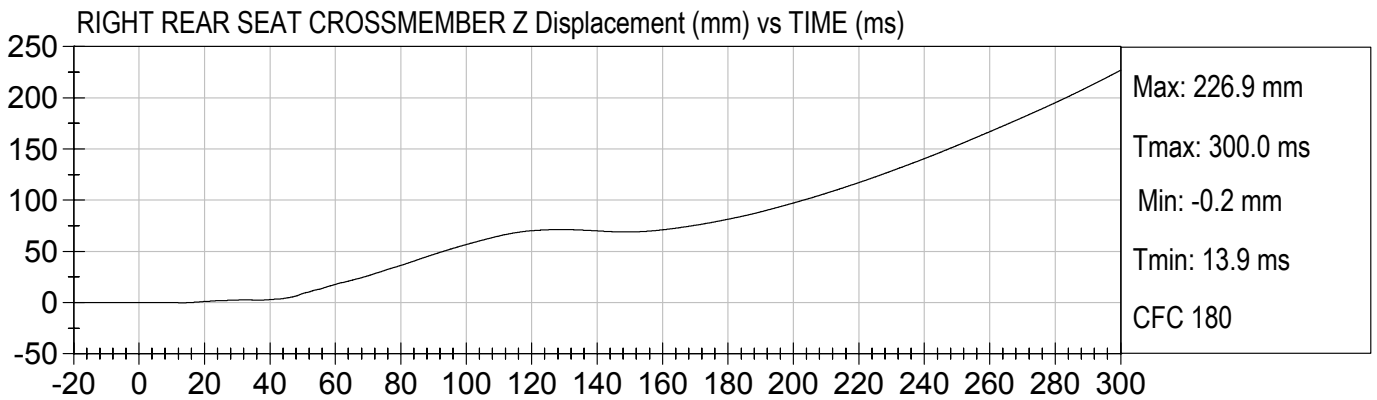
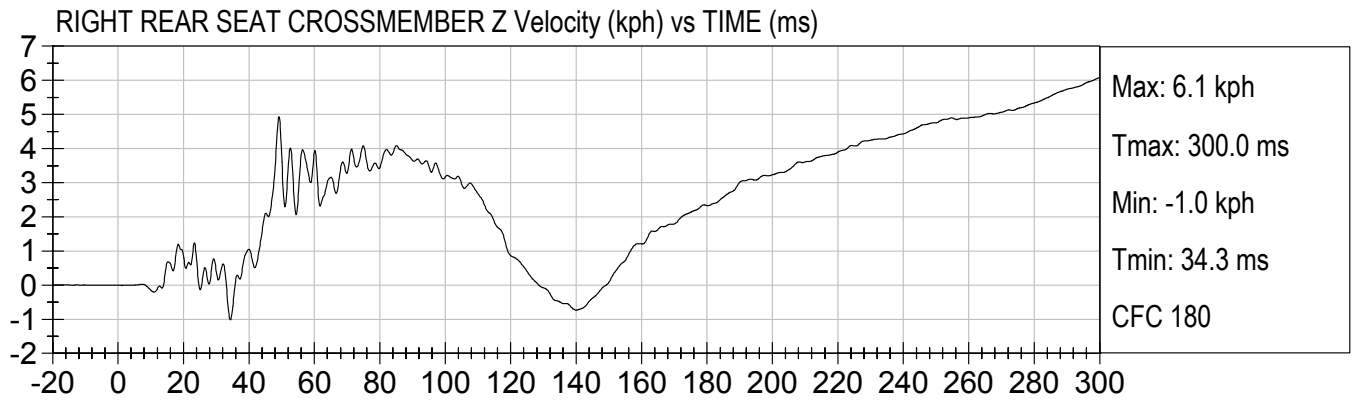
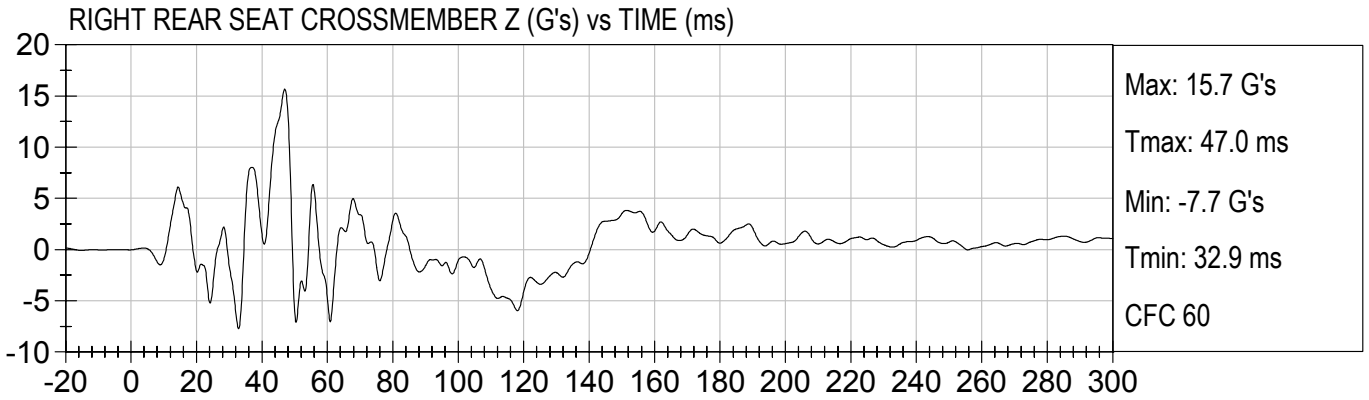


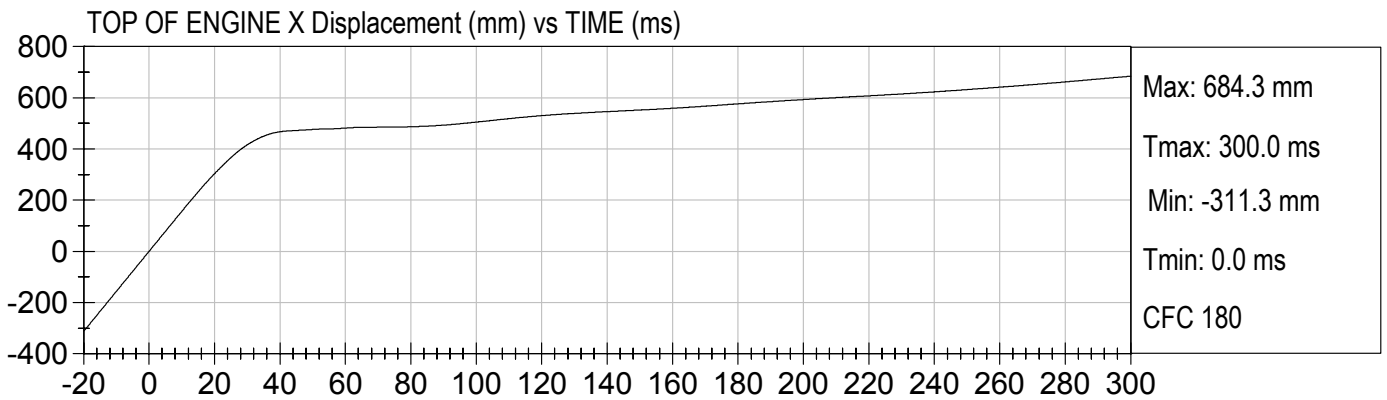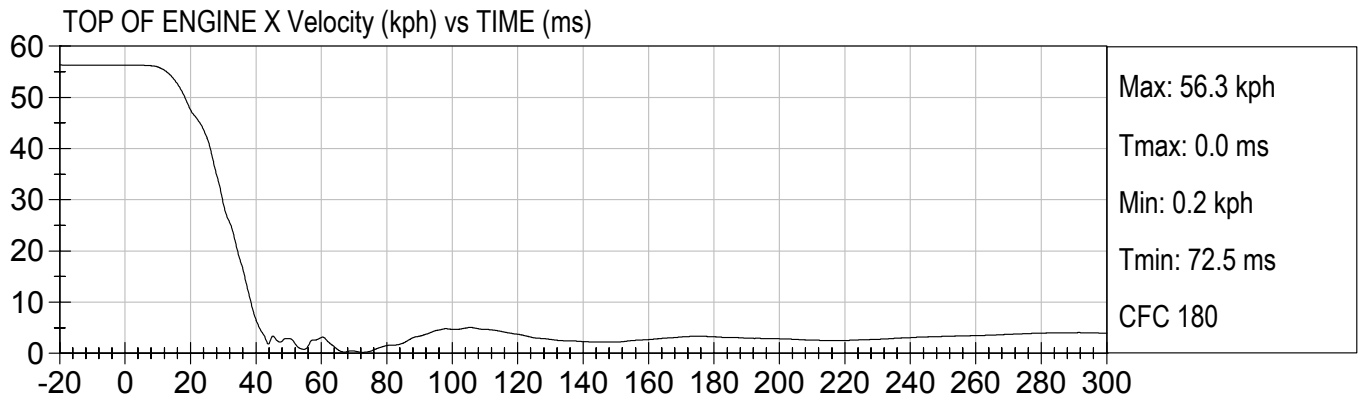
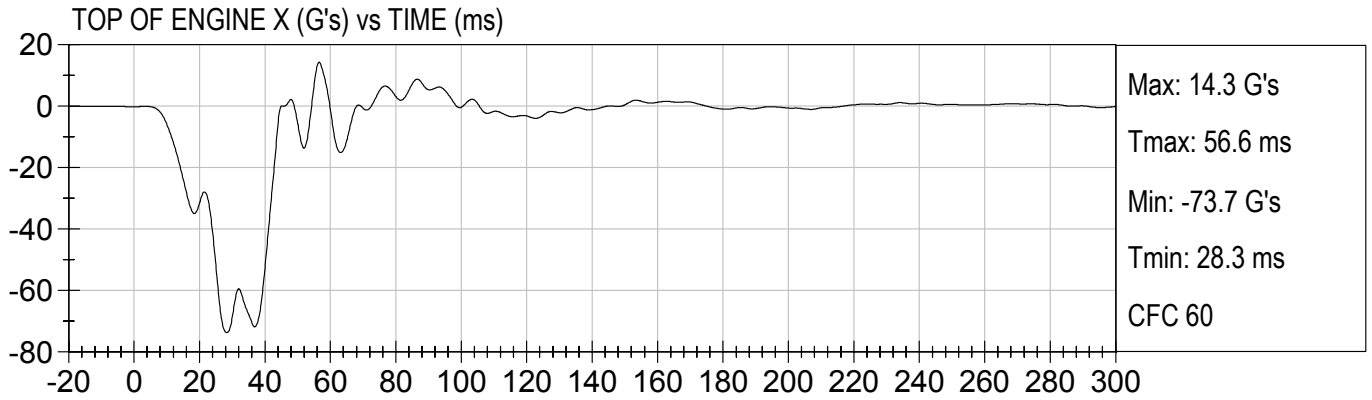


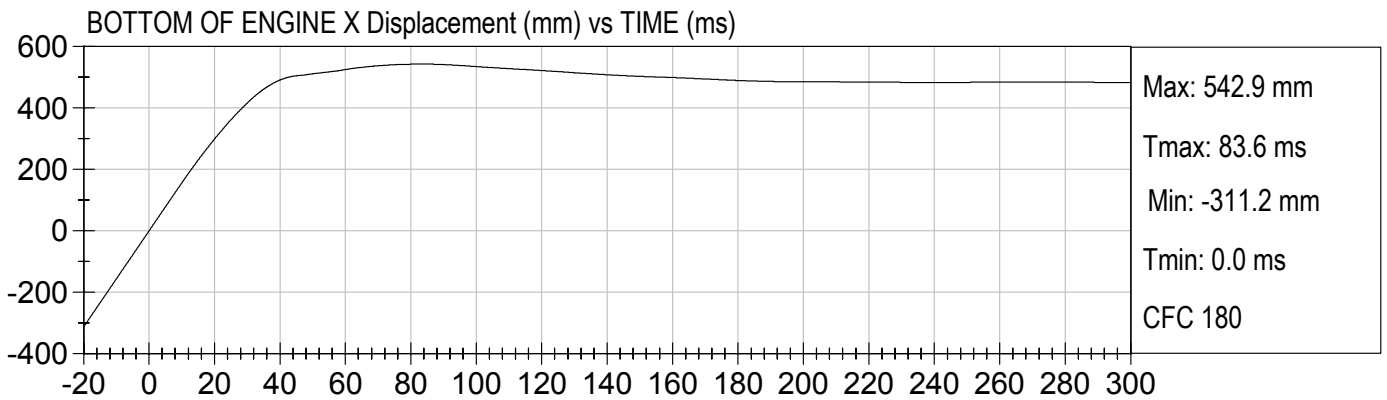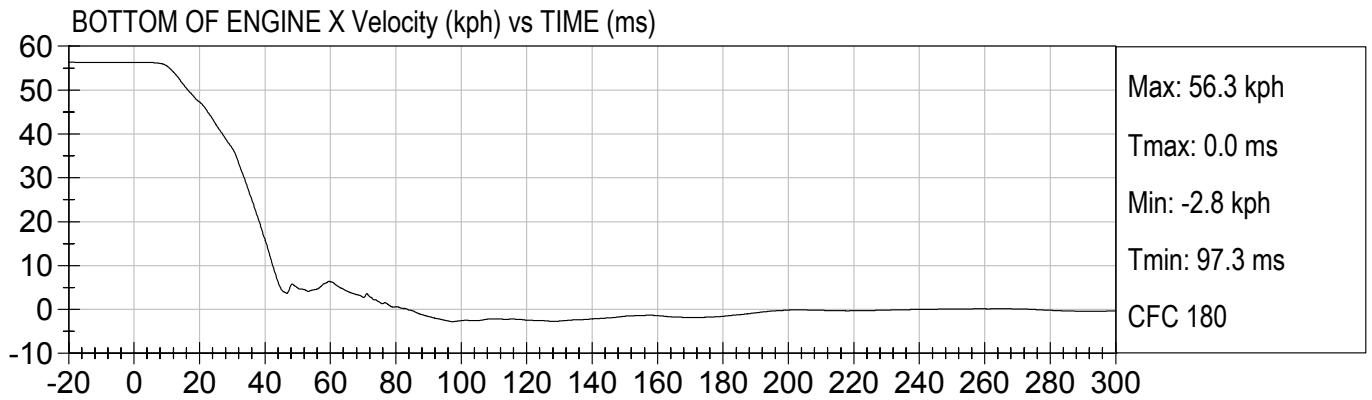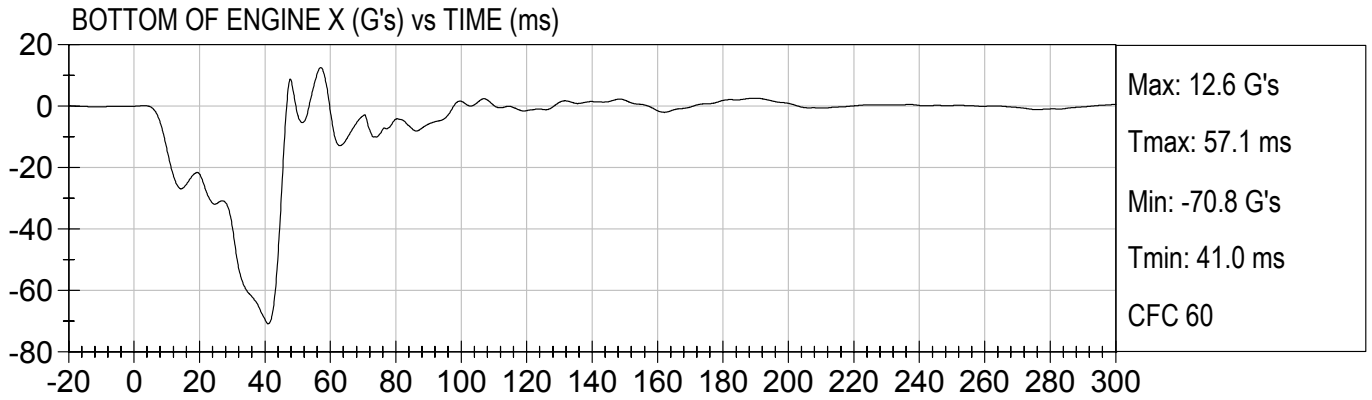

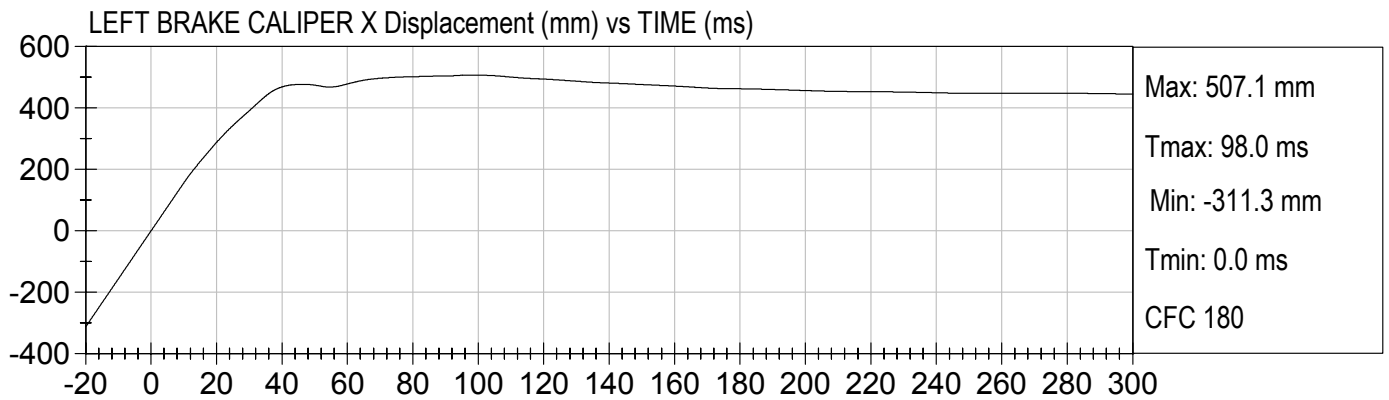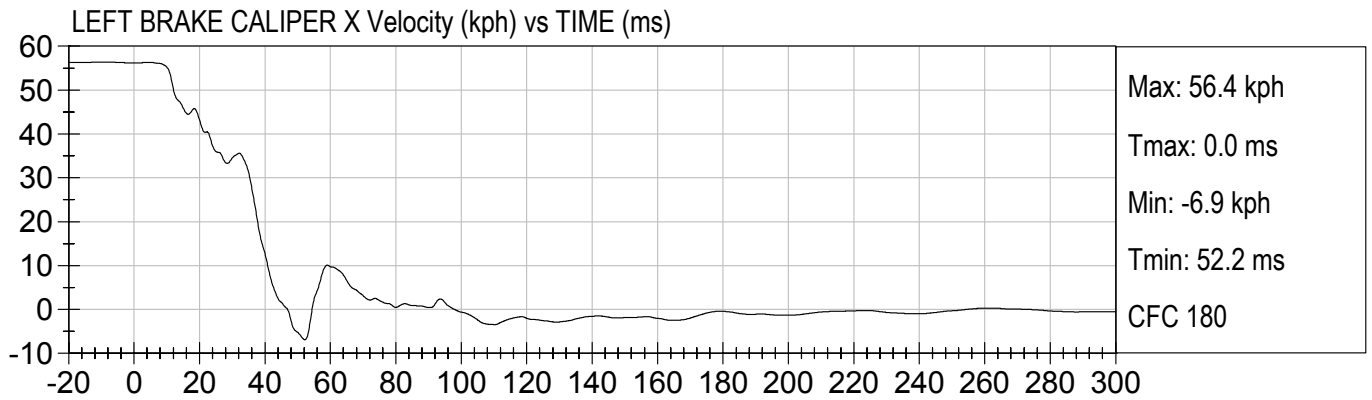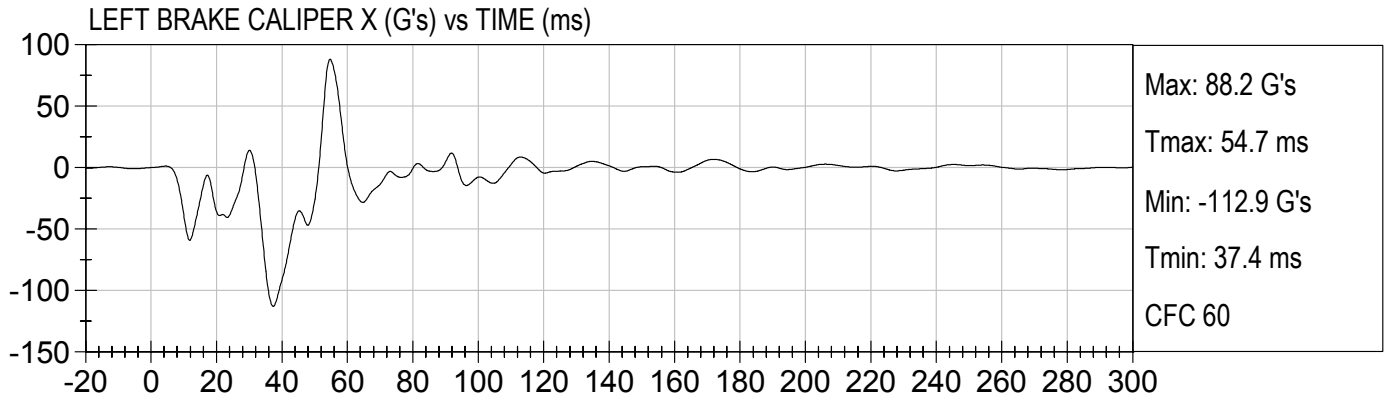

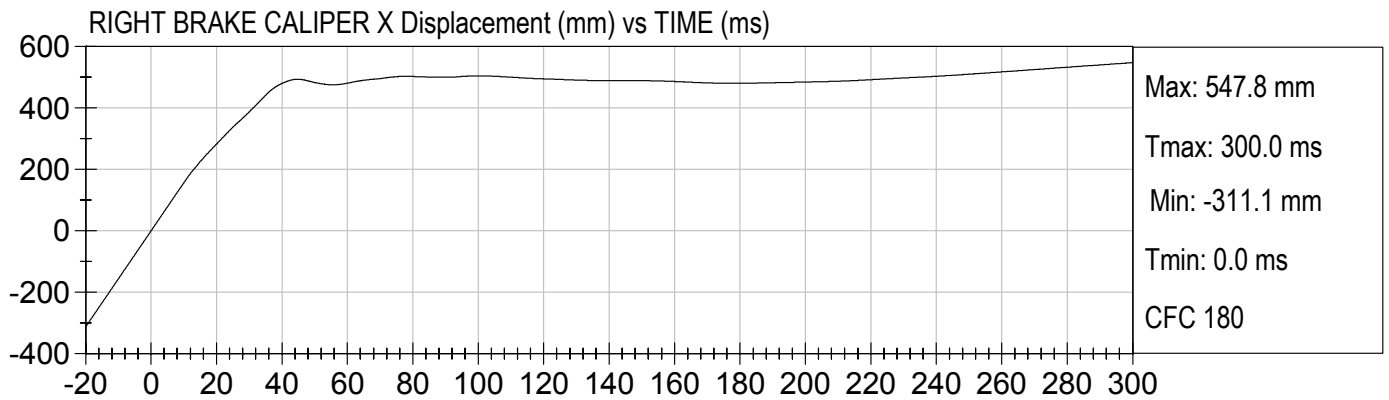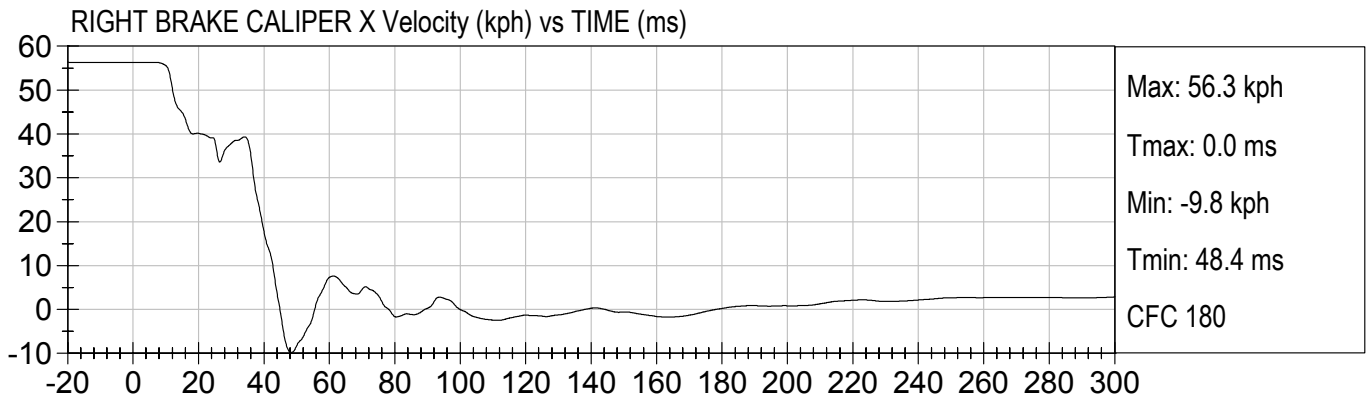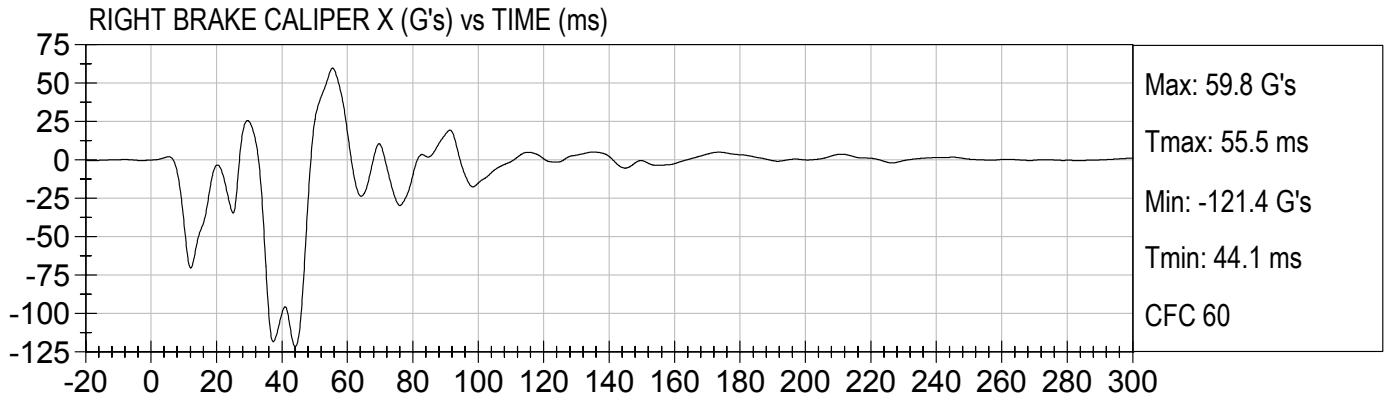

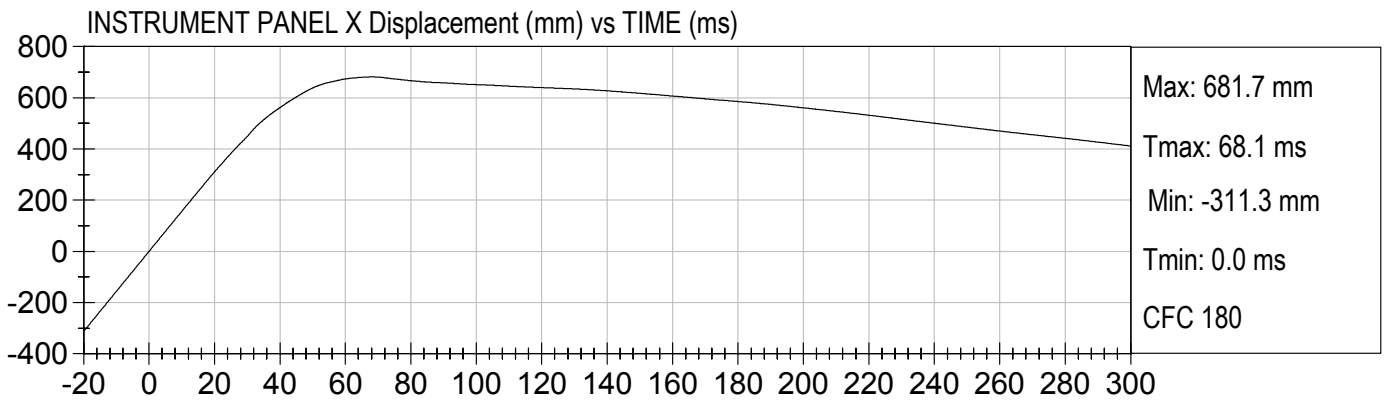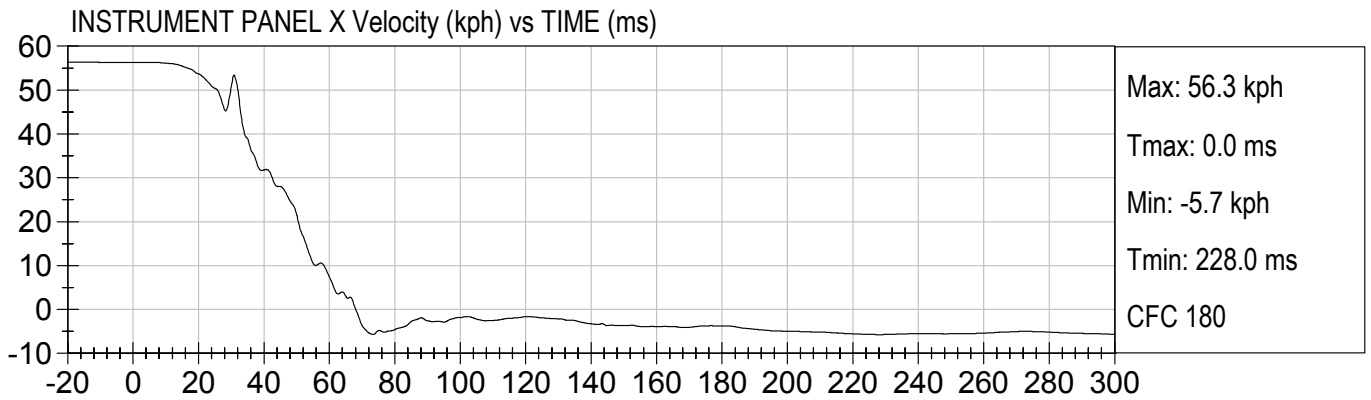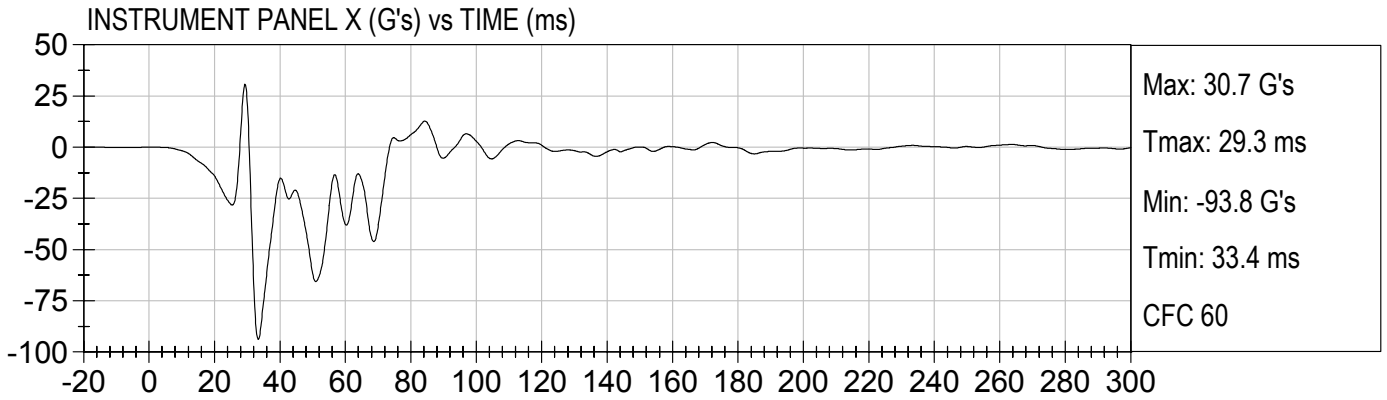

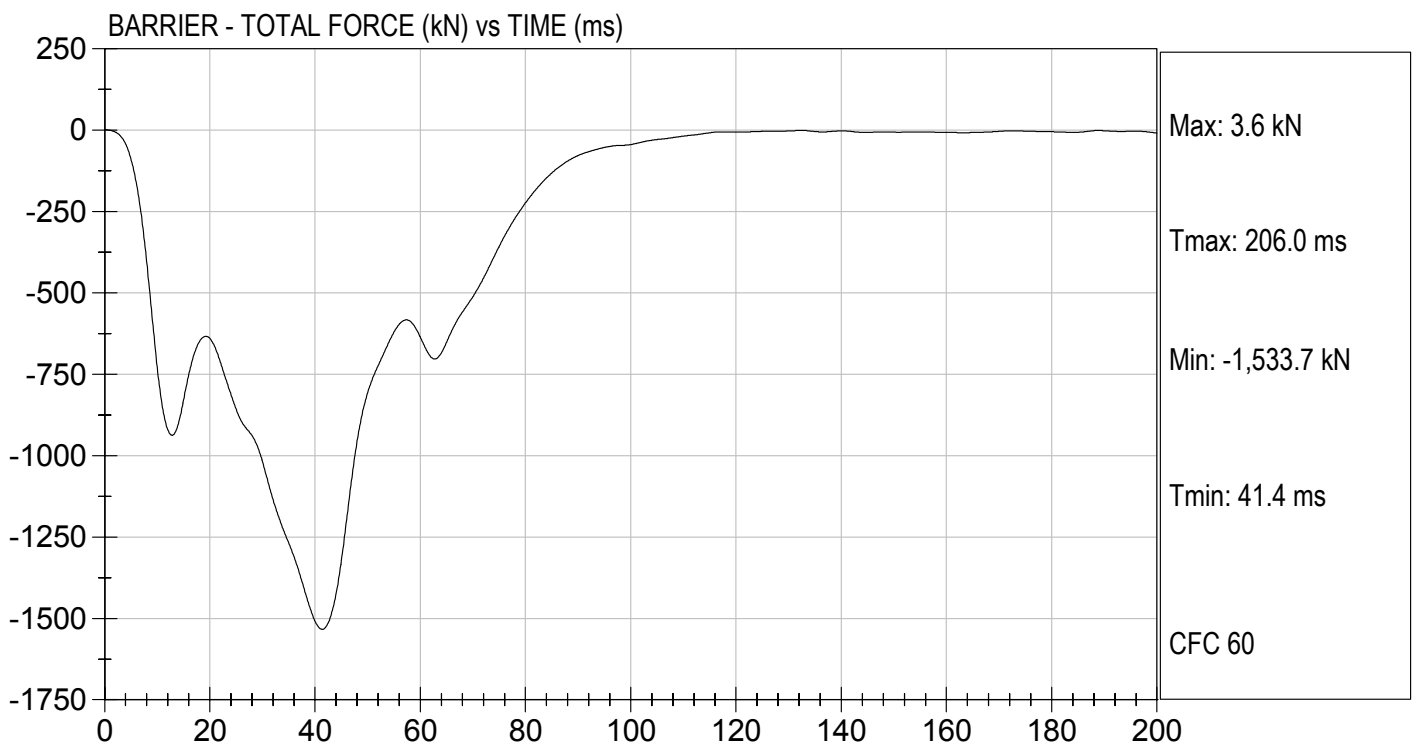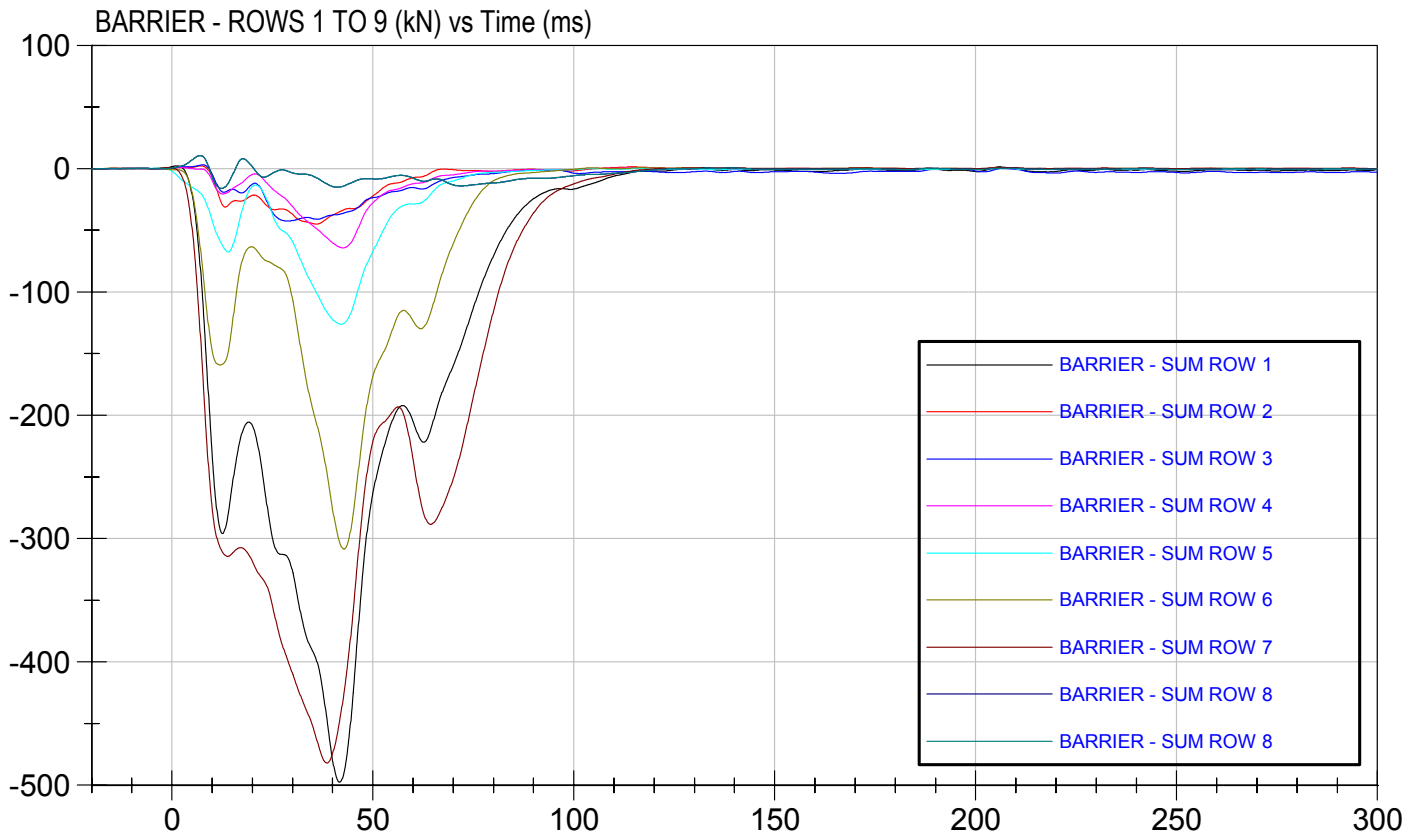

## **APPENDIX C**

### **DUMMY CALIBRATION DATA TRACES AND TABLES**

**MGA RESEARCH CORPORATION  
HEAD DROP TEST  
HYBRID III 50TH PERCENTILE MALE**

**ATD Serial No:** 066

**Test ID:** D05151

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 - 25.6	21.0	Pass
Laboratory Relative Humidity	%	10 to 70	21	Pass
Peak Resultant Acceleration	G's	225 - 275	251	Pass
Peak Lateral Acceleration	G's	<= +/- 15.0	-11.0	Pass
Unimodal	Yes/No	NA	Yes	Pass
Oscillations	Yes/No	within 10% of peak	Yes	Pass
Overall Test Results				Pass



\_\_\_\_\_  
Laboratory Technician

01/20/2005

\_\_\_\_\_  
Test Date




\_\_\_\_\_  
Approved By




Test Desc: Head Drop  
Componet ID: D05151

Test Date: 01/20/2005  
Velocity: 0 ft/s, 0.00 m/s

HEAD RESULTANT ACCELERATION (G'S) vs TIME (ms)

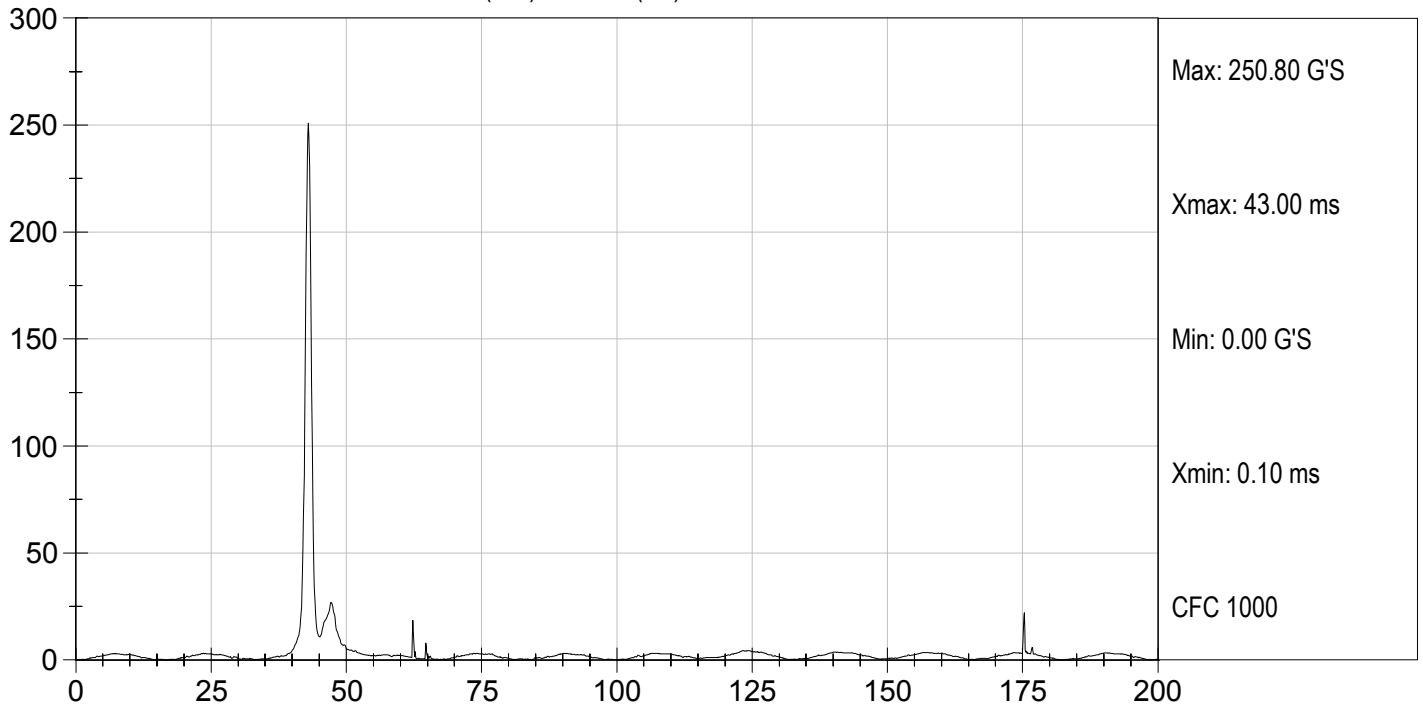

HEAD Y (G'S) vs TIME (ms)

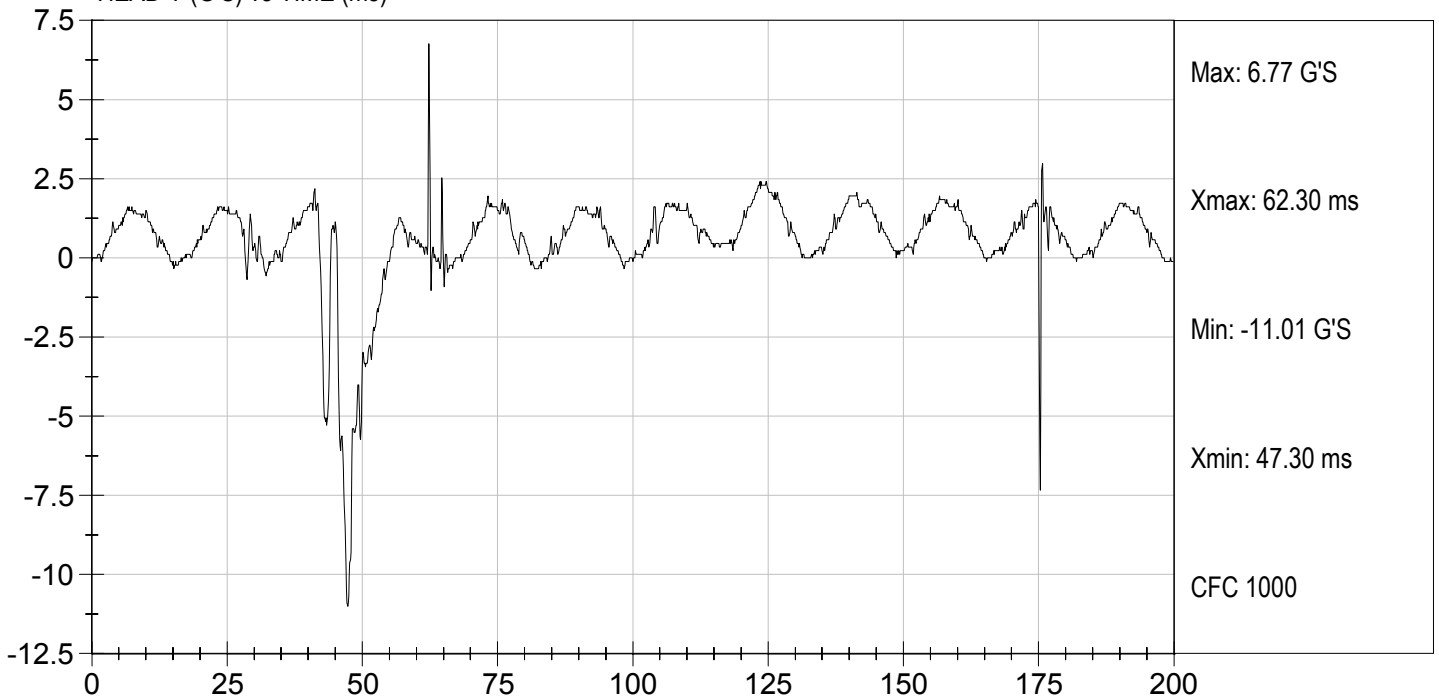

**MGA RESEARCH CORPORATION  
NECK FLEXION TEST  
HYBRID III 50TH PERCENTILE MALE**


ATD Serial No: 066

Test I.D.: D05152

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity		%	10 to 70	21	Pass
Pendulum Velocity		m/s	6.89 to 7.13	6.93	Pass
Pendulum Deceleration	10 msec	G's	22.50 to 27.50	23.32	Pass
	20 msec	G's	17.60 to 22.60	19.69	Pass
	30 msec	G's	12.50 to 18.50	15.18	Pass
Peak Pendulum Deceleration After 30 msec		G's	<= 29.0	15.12	Pass
Deceleration Decay Time to Cross 5 G's		msec	34.0 to 42.0	39.5	Pass
Maximum "D" Plane Rotation	Maximum	Degrees	64.0 to 78.0	73.2	Pass
	Time	msec	57.0 to 64.0	60.9	Pass
"D" Plane Rotation Decay Time To Zero Crossing		msec	113.0 to 128.0	115.5	Pass
Moment About Occipital Condyle	Maximum	N m	88.1 to 108.5	97.1	Pass
	Time	msec	47.0 to 58.0	52.7	Pass
Positive Moment Decay Time To Zero Crossing		msec	97.0 to 107.0	102.7	Pass
Overall Test Results					Pass

  
\_\_\_\_\_  
Laboratory Technician

01/20/2005  
\_\_\_\_\_  
Test Date


  
\_\_\_\_\_  
Approved By




Test Desc: Neck Flexion  
Componet ID: D05152

Test Date: 01/20/2005  
Velocity: 22.73 ft/s, 6.93 m/s

PENDULUM DECELERATION (G'S) vs TIME (ms)

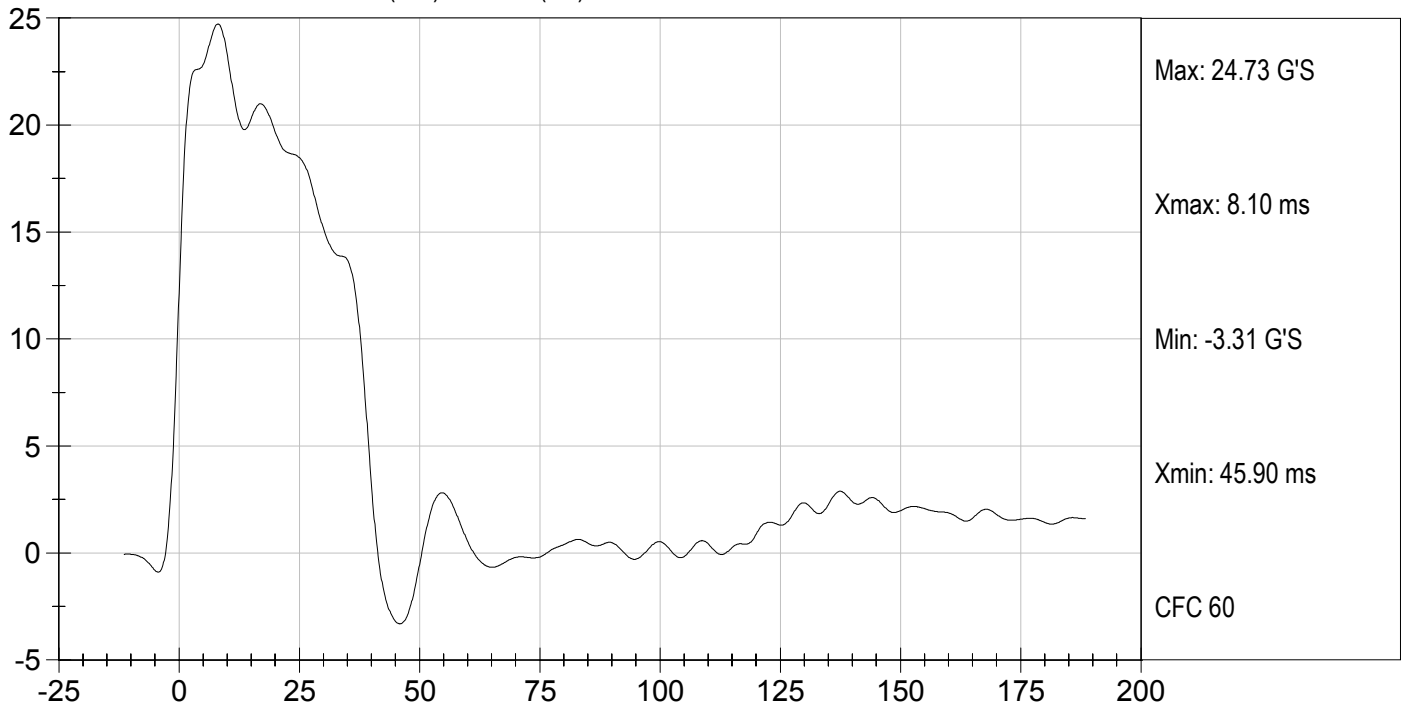


NECK ROTATION (DEG.) vs TIME (ms)

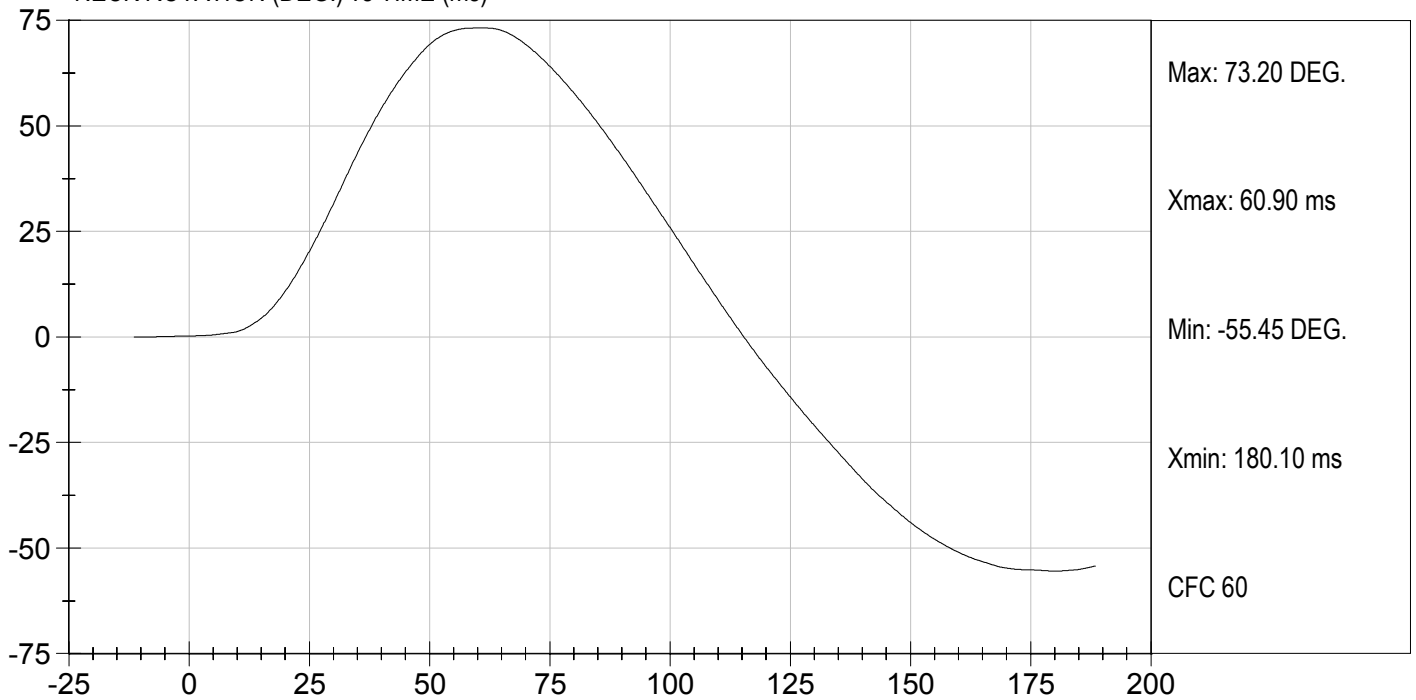



Test Desc: Neck Flexion  
Componet ID: D05152

Test Date: 01/20/2005  
Velocity: 22.73 ft/s, 6.93 m/s

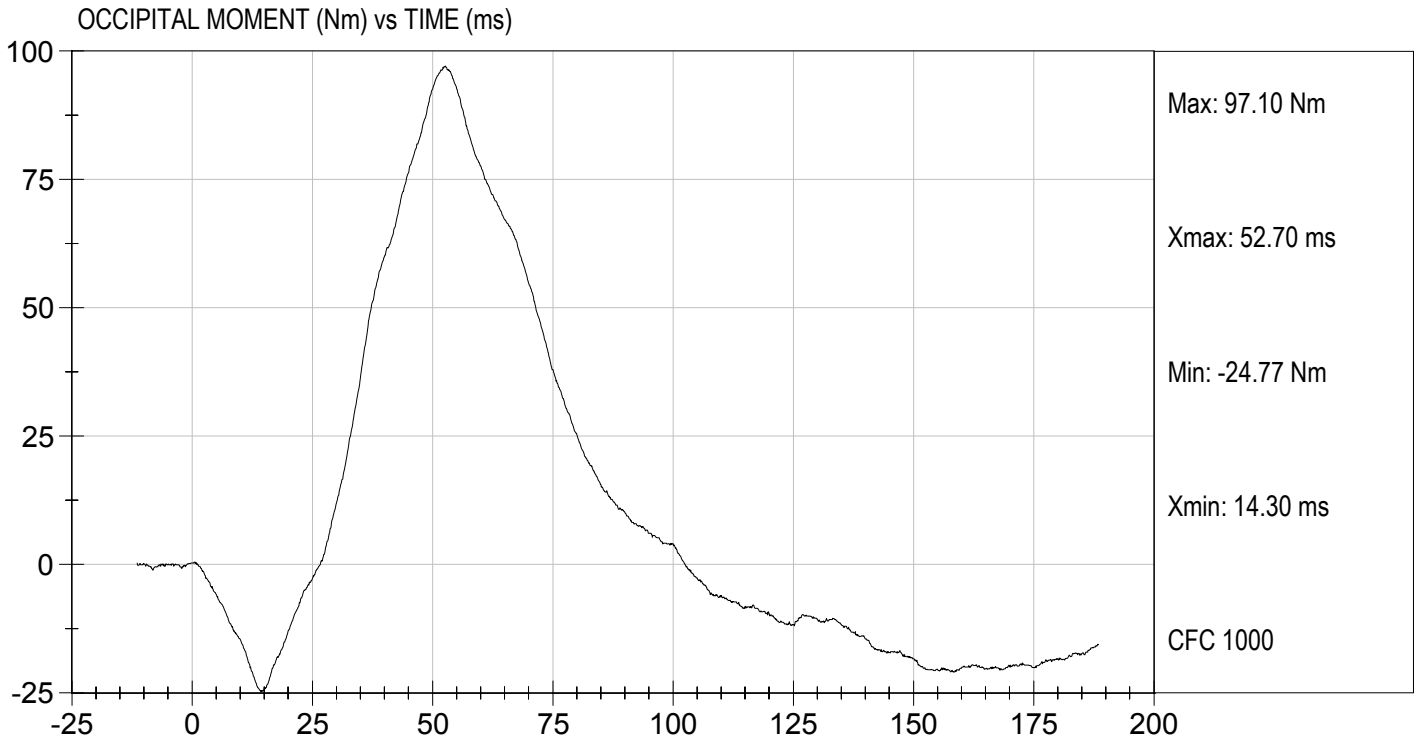

**MGA RESEARCH CORPORATION  
NECK EXTENSION TEST  
HYBRID III 50TH PERCENTILE MALE**

ATD Serial No: 066

Test I.D.: D05153

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.0	Pass
Laboratory Relative Humidity		%	10 to 70	21	Pass
Pendulum Velocity		m/s	5.95 to 6.19	5.99	Pass
Pendulum Deceleration	10 msec	G's	17.20 to 21.20	19.62	Pass
	20 msec	G's	14.00 to 19.00	16.20	Pass
	30 msec	G's	11.00 to 16.00	14.10	Pass
Peak Pendulum Deceleration After 30 msec		G's	<= 22.0	14.04	Pass
Deceleration Decay Time to Cross 5 G's		msec	38.0 to 46.0	39.1	Pass
Maximum "D" Plane Rotation	Maximum	Degrees	81.0 to 106.0	101.0	Pass
	Time	msec	72.0 to 82.0	78.2	Pass
"D" Plane Rotation Decay Time To Zero Crossing		msec	147.0 to 174.0	157.5	Pass
Moment About Occipital Condyle	Maximum	N m	-52.9 to -79.9	-69.5	Pass
	Time	msec	65.0 to 79.0	72.4	Pass
Negative Moment Decay Time To Zero Crossing		msec	120.0 to 148.0	147.2	Pass
Overall Test Results					Pass

*Joe Fleck*  
\_\_\_\_\_  
Laboratory Technician

01/20/2005  
\_\_\_\_\_  
Test Date


*David Winkelbauer*  
\_\_\_\_\_  
Approved By




Test Desc: Neck Extension  
Componet ID: D05153

Test Date: 01/20/2005  
Velocity: 19.64 ft/s, 5.99 m/s

PENDULUM DECELERATION (G'S) vs TIME (ms)

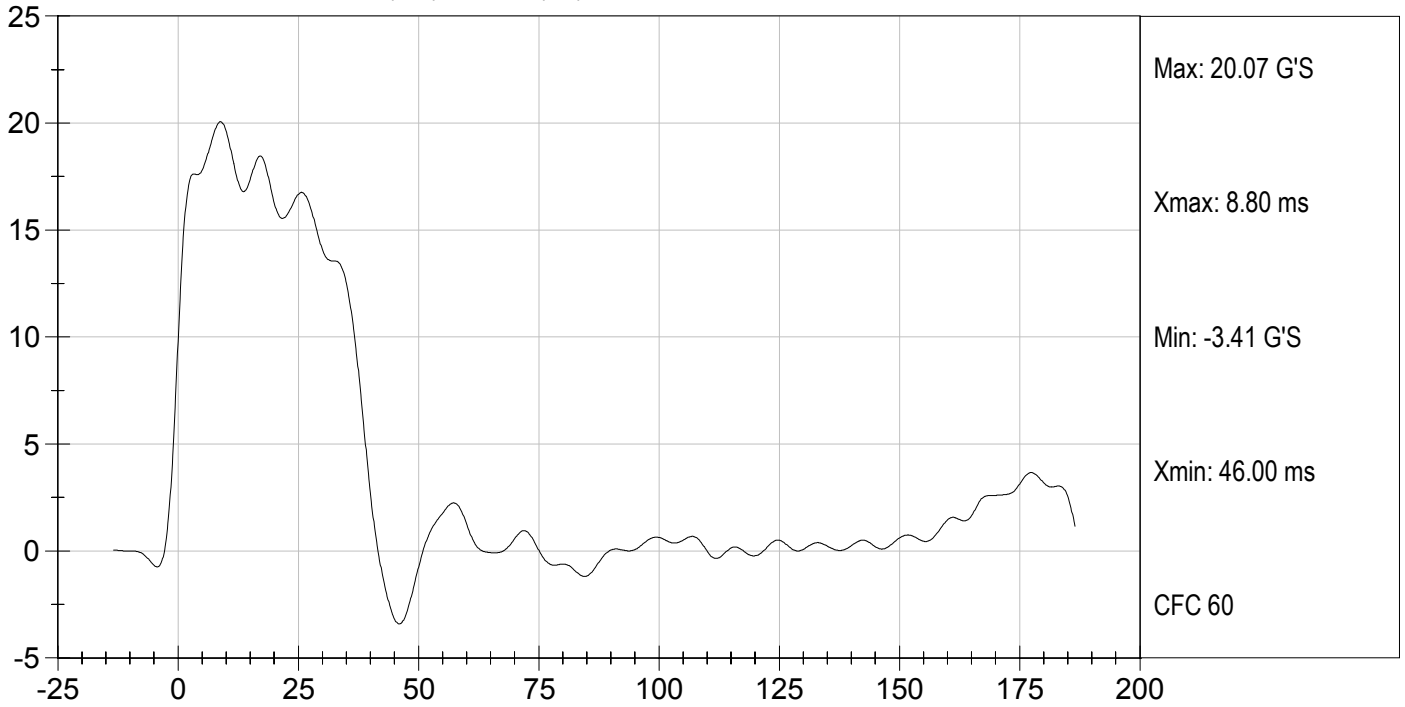


NECK ROTATION (DEG.) vs TIME (ms)

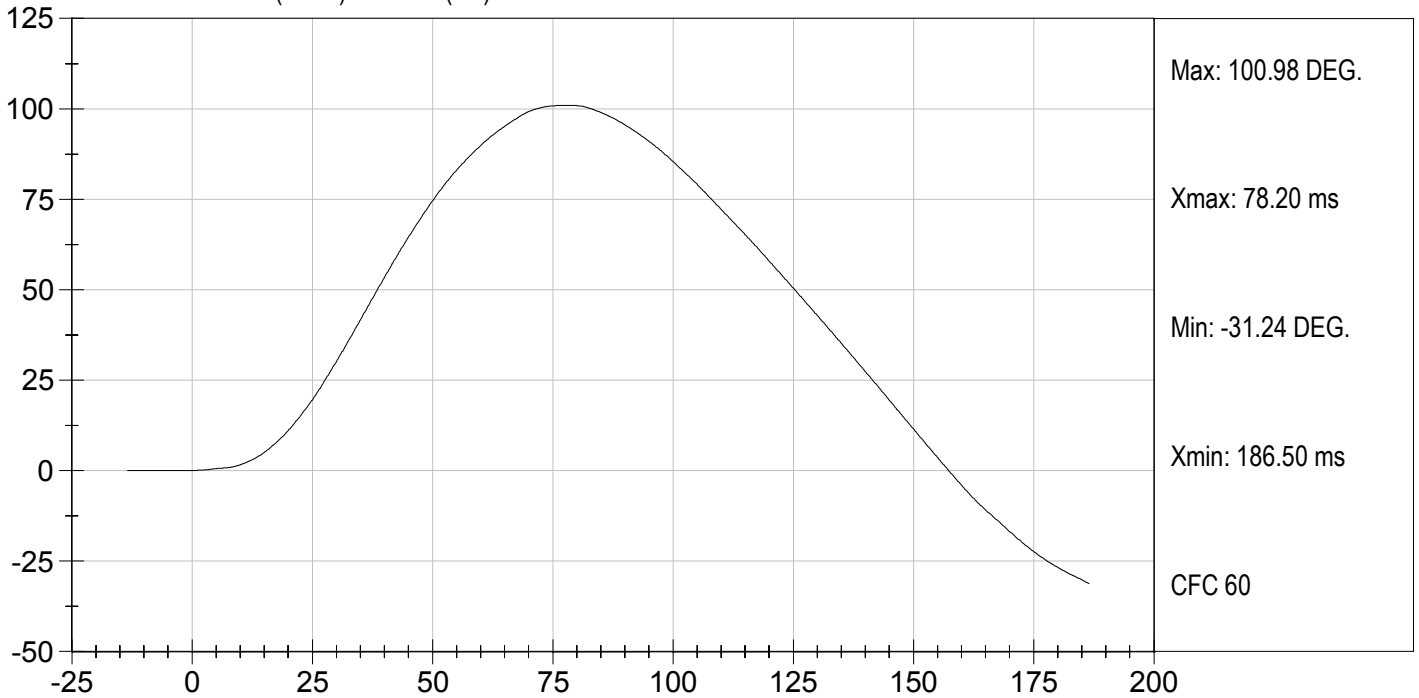



Test Desc: Neck Extension  
Componet ID: D05153

Test Date: 01/20/2005  
Velocity: 19.64 ft/s, 5.99 m/s

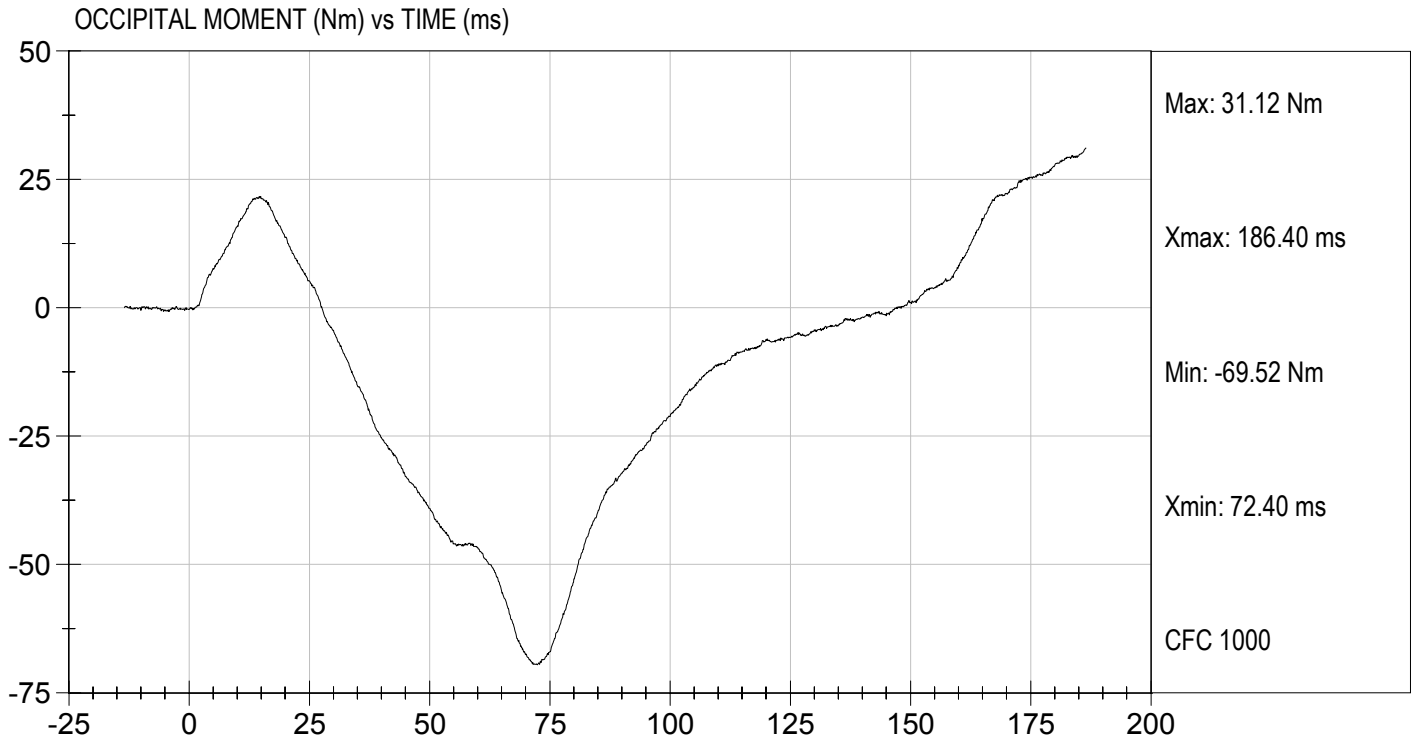

**MGA RESEARCH CORPORATION  
THORAX IMPACT  
HYBRID III 50TH PERCENTILE MALE**

**ATD Serial No:** 066

**Test I.D.:** D05154

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	20.6 to 22.2	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	18	Pass
Probe Velocity	m/s	6.58 to 6.82	6.73	Pass
Peak Probe Force	N	5159 to 5893	5,800	Pass
Peak Sternum Displacement	cm	6.35 to 7.26	6.82	Pass
Internal Hysteresis	%	69 to 85	71	Pass
			Overall Test Results	Pass

*Joe Fleck*


\_\_\_\_\_  
Laboratory Technician

01/21/2005

\_\_\_\_\_  
Test Date

*David Winkelbauer*

\_\_\_\_\_  
Approved By

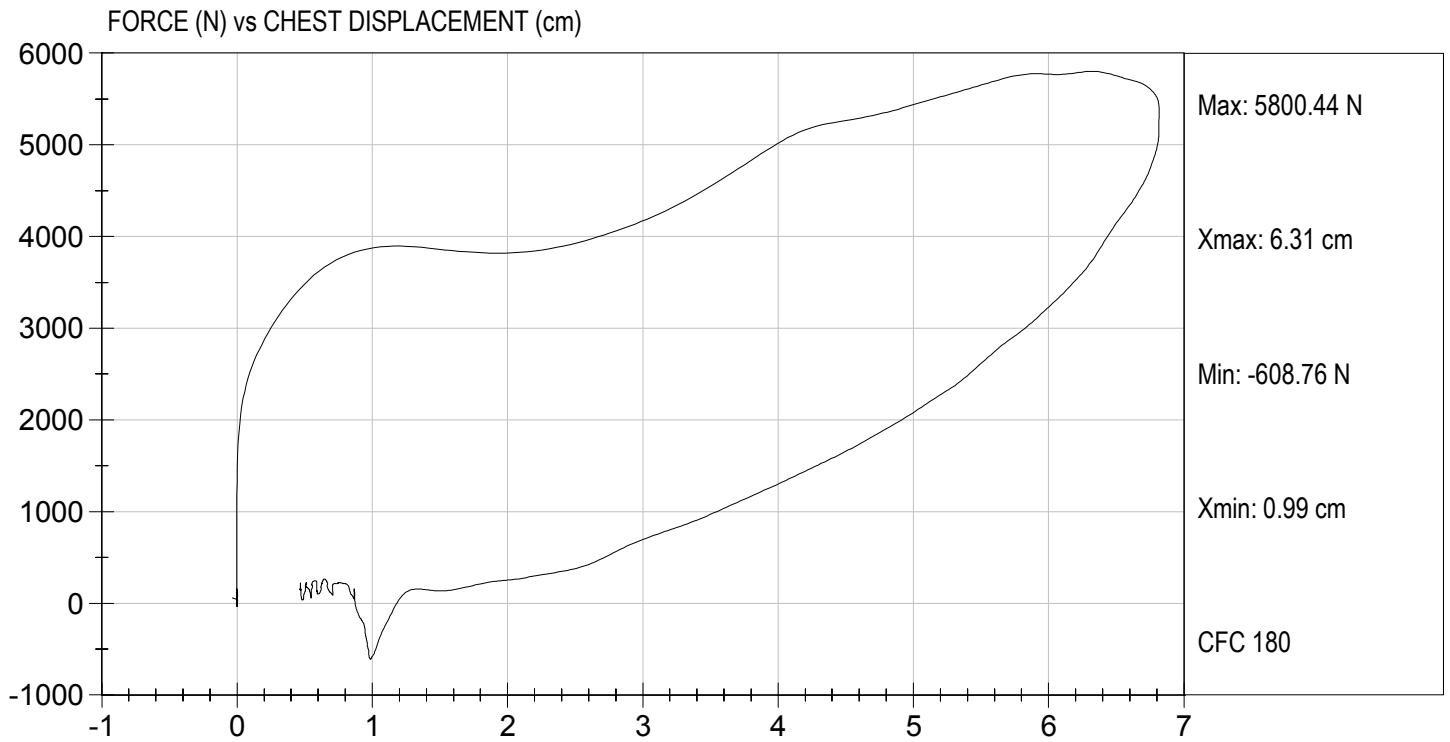

**MGA RESEARCH CORPORATION**  
**RIGHT KNEE IMPACT TEST**  
**HYBRID III 50TH PERCENTILE MALE**

ATD Serial No: 066

Test I.D.: D05155

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.5	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	19	Pass
Probe Velocity	m/sec	2.07 to 2.13	2.11	Pass
Peak Probe Force	Newtons	4715 to 5782	5,538	Pass
Overall Test Results				Pass



\_\_\_\_\_  
Laboratory Technician

01/21/2005

\_\_\_\_\_  
Test Date




\_\_\_\_\_  
Approved By



Test Desc: Right Knee  
Componet ID: D05155

Test Date: 01/21/2005  
Velocity: 6.91 ft/s, 2.11 m/s

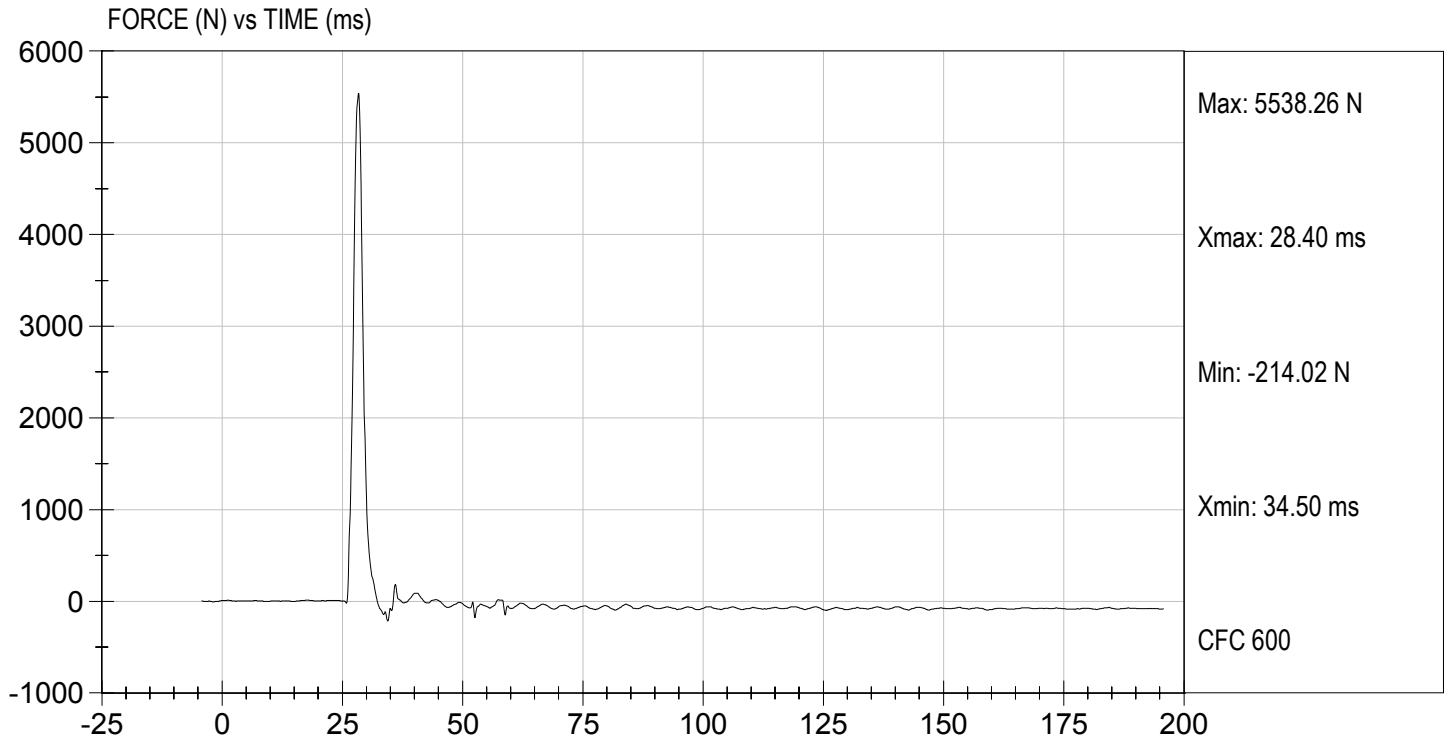

**MGA RESEARCH CORPORATION**  
**LEFT KNEE IMPACT TEST**  
**HYBRID III 50TH PERCENTILE MALE**

ATD Serial No: 066

Test I.D.: D05156

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.5	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	18	Pass
Probe Velocity	m/sec	2.07 to 2.13	2.11	Pass
Peak Probe Force	Newtons	4715 to 5782	4,905	Pass
Overall Test Results				Pass



\_\_\_\_\_  
Laboratory Technician

01/21/2005

\_\_\_\_\_  
Test Date




\_\_\_\_\_  
Approved By



Test Desc: Left Knee  
Componet ID: D05156

Test Date: 01/21/2005  
Velocity: 6.93 ft/s, 2.11 m/s

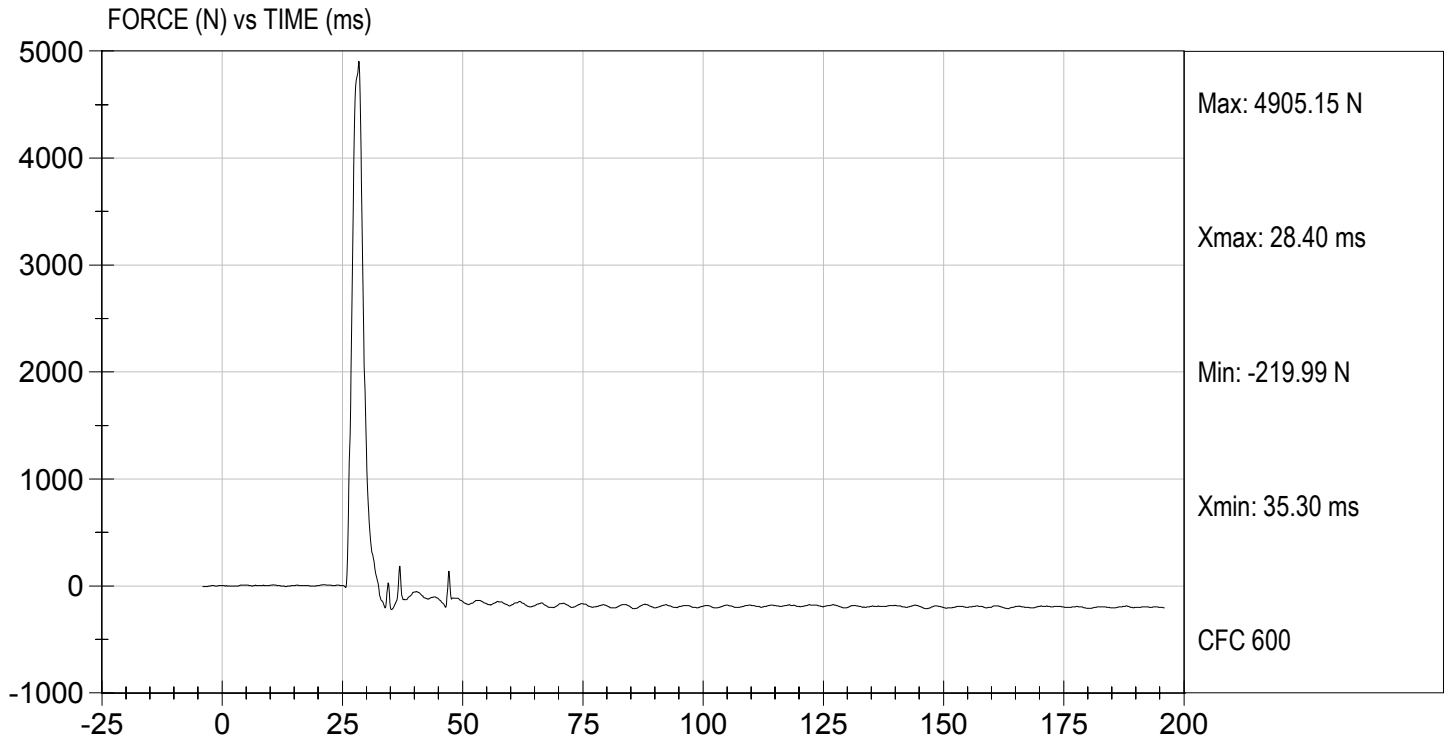

**MGA RESEARCH CORPORATION**  
**HIP-FEMUR FLEXION TEST**  
**HYBRID III 50TH PERCENTILE MALE**

**ATD Serial No:** 066

**Test I.D:** D05150

Tested Parameter	Units	Specification	Result		Pass/Fail
			Right	Left	
Laboratory Temperature	deg C	18.9 to 25.6	21.5	21.5	Pass
Laboratory Relative Humidity	%	10 to 70	18	18	Pass
Rotation Rate	deg/sec	5 -10	8	8	Pass
30 Degrees	Nm	94.9 Nm Max	84.2	76.6	Pass
150 ft-lbf / 203.4 Nm	Deg	40- 50 Degree Max Rotation	43	40	Pass
Overall Test Results					Pass



\_\_\_\_\_  
 Laboratory Technician

01/21/2005

\_\_\_\_\_  
 Test Date




\_\_\_\_\_  
 Approved By



Test Desc: Hip Femur Flexion  
Componet ID: D05159


Test Date: 01/21/2005  
Velocity: 0 ft/s, 0.00 m/s

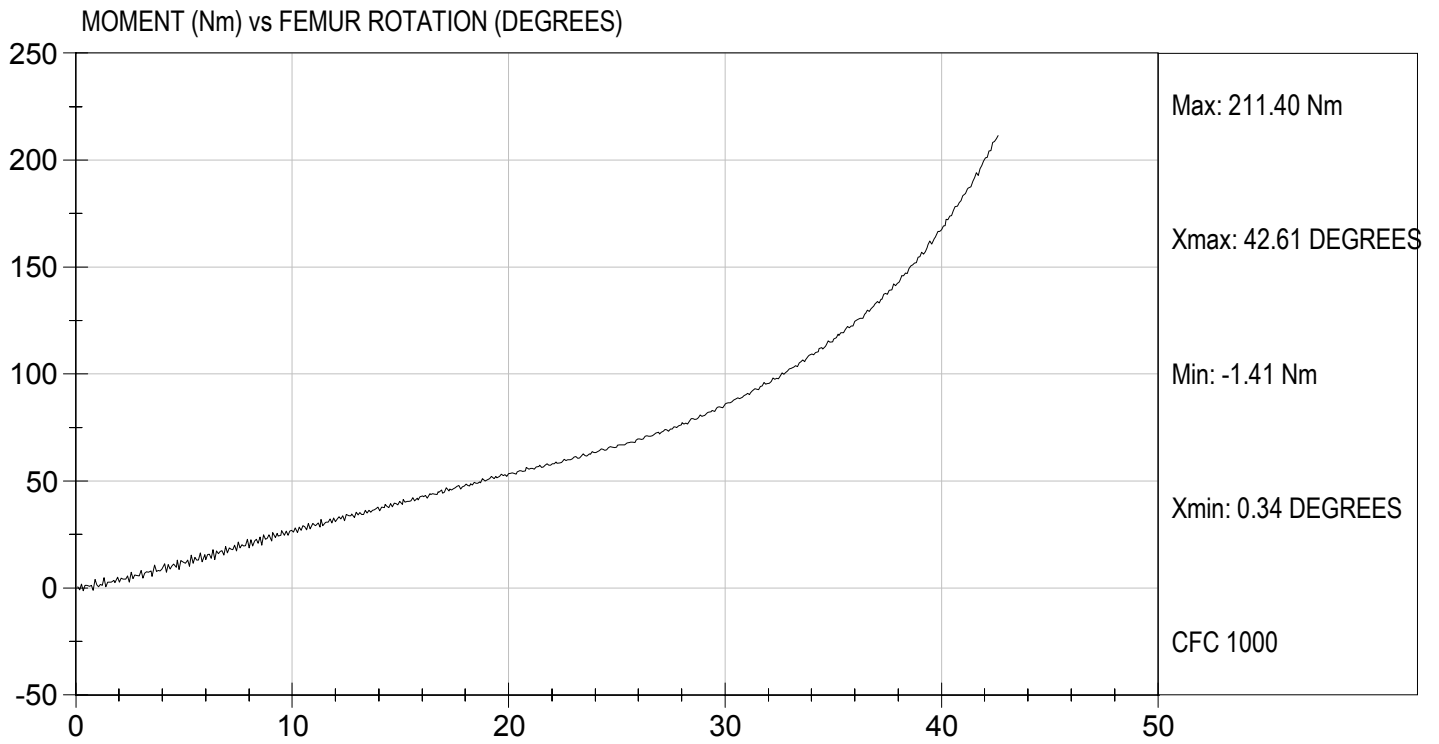



Test Desc: Hip Femur Flexion  
Componet ID: D05150

Test Date: 01/21/2005  
Velocity: 0 ft/s, 0.00 m/s

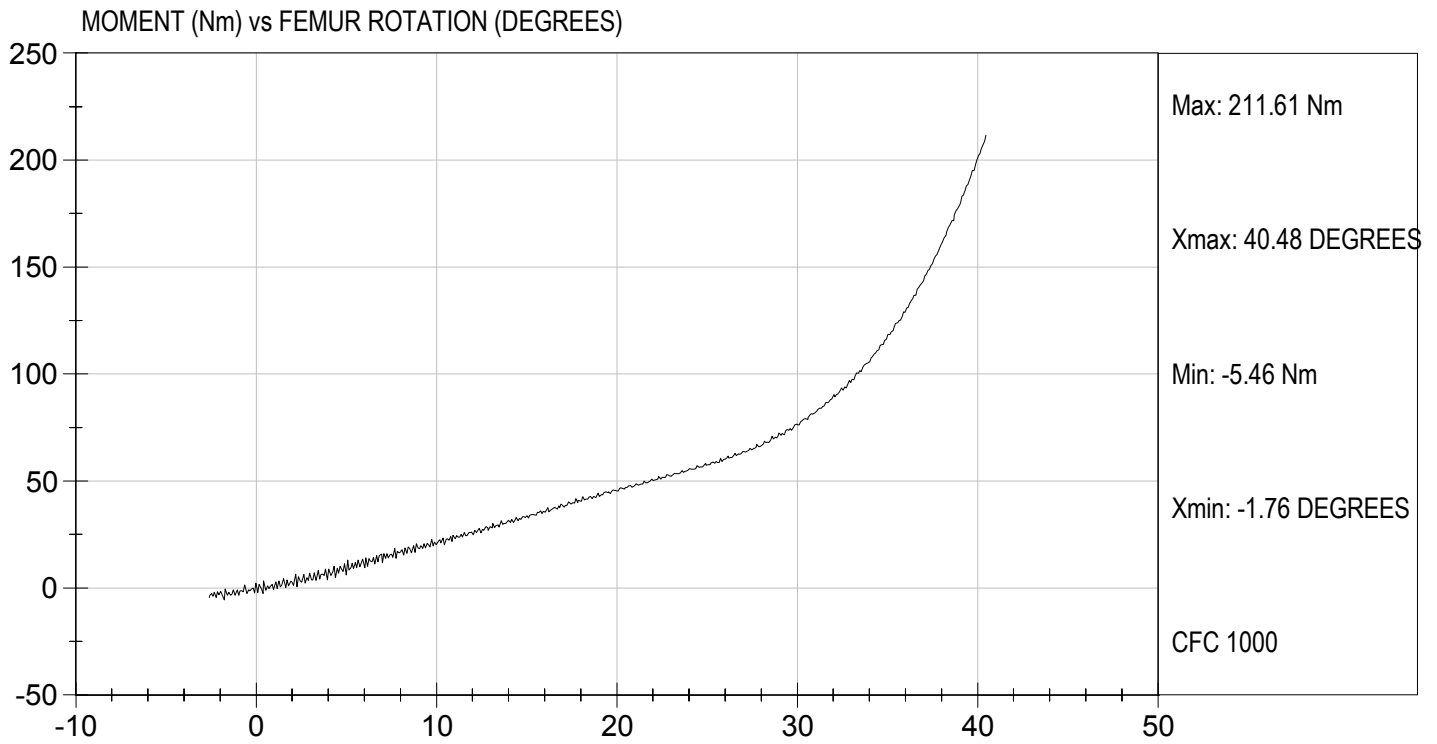

**MGA RESEARCH CORPORATION  
HEAD DROP TEST  
HYBRID III 50TH PERCENTILE MALE**

ATD Serial No: 065

Test ID: D05141

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 - 25.6	21.0	Pass
Laboratory Relative Humidity	%	10 to 70	23	Pass
Peak Resultant Acceleration	G's	225 - 275	240	Pass
Peak Lateral Acceleration	G's	<= +/- 15.0	14.2	Pass
Unimodal	Yes/No	NA	Yes	Pass
Oscillations	Yes/No	within 10% of peak	Yes	Pass
Overall Test Results				Pass



\_\_\_\_\_  
Laboratory Technician

01/20/2005


\_\_\_\_\_  
Test Date




\_\_\_\_\_  
Approved By



HEAD RESULTANT ACCELERATION (G'S) vs TIME (ms)

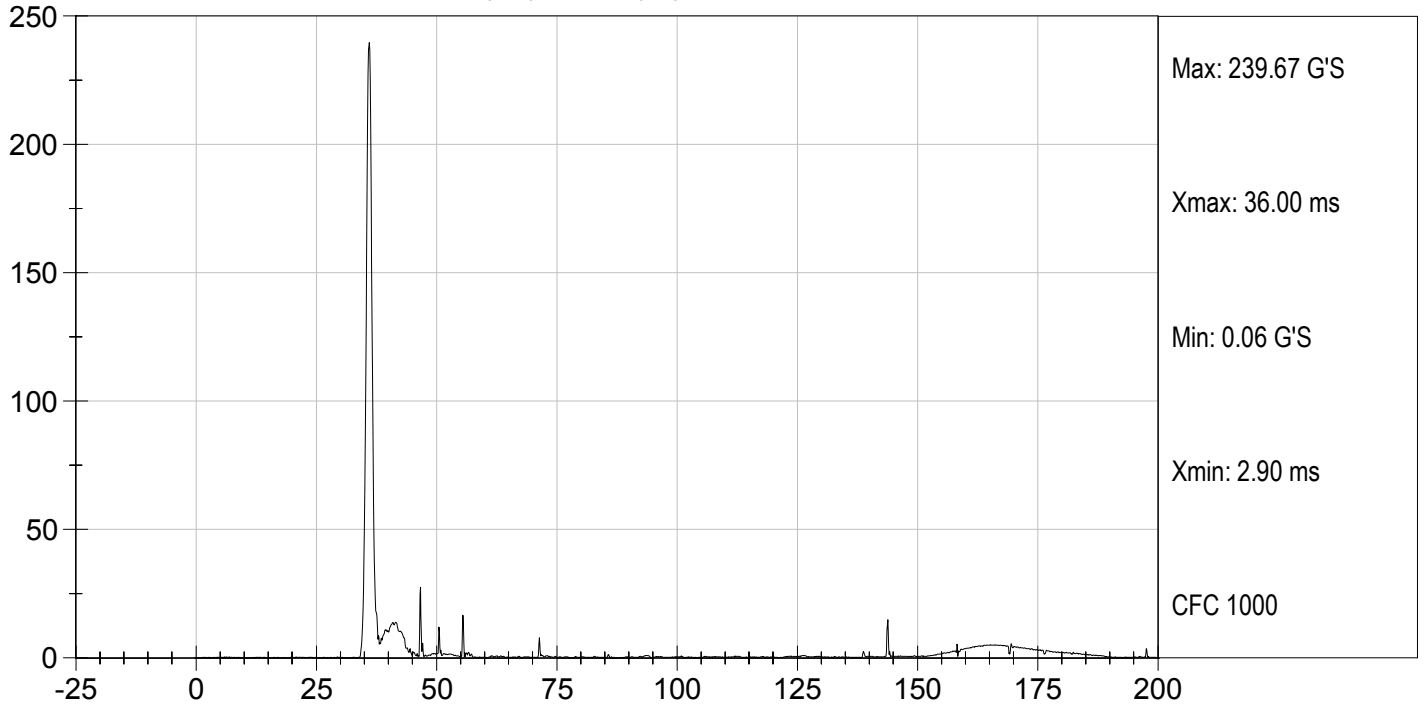

HEAD Y (G'S) vs TIME (ms)

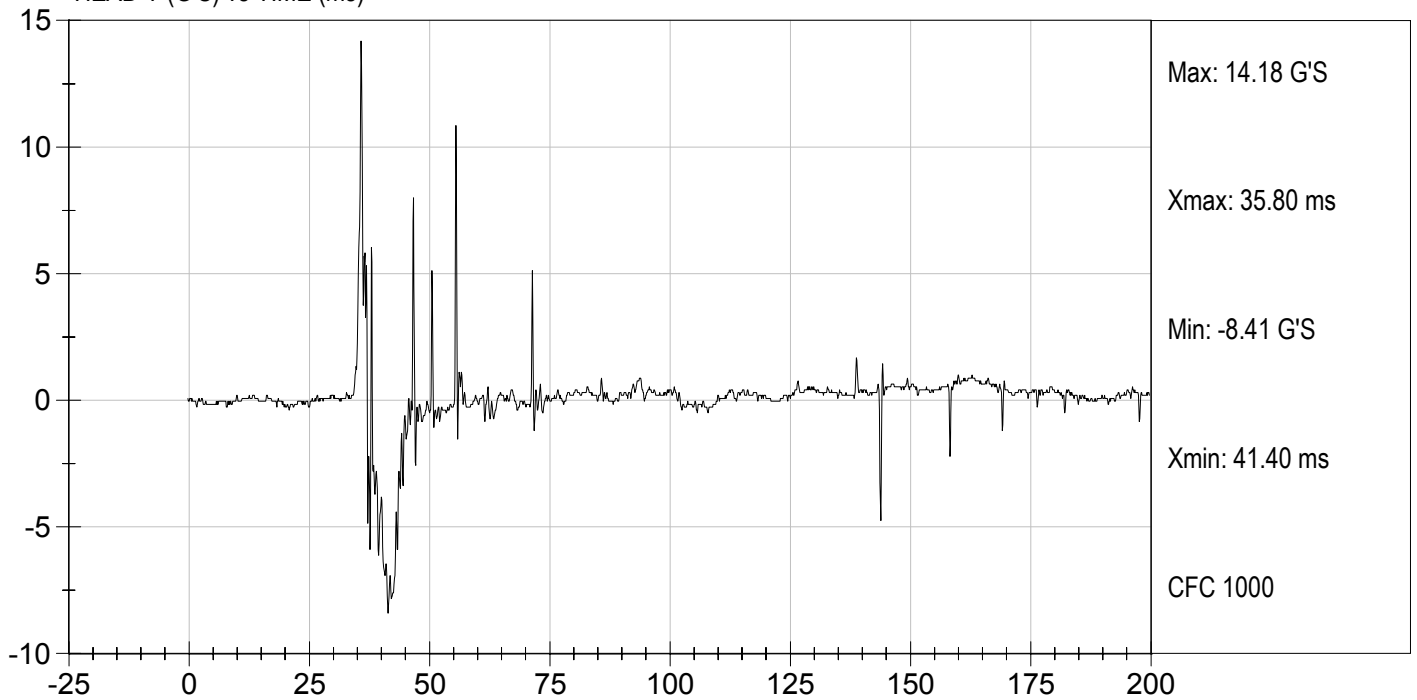

**MGA RESEARCH CORPORATION  
NECK FLEXION TEST  
HYBRID III 50TH PERCENTILE MALE**


ATD Serial No: 065

Test I.D.: D05142

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	20.9	Pass
Laboratory Relative Humidity		%	10 to 70	22	Pass
Pendulum Velocity		m/s	6.89 to 7.13	6.96	Pass
Pendulum Deceleration	10 msec	G's	22.50 to 27.50	25.11	Pass
	20 msec	G's	17.60 to 22.60	20.49	Pass
	30 msec	G's	12.50 to 18.50	15.90	Pass
Peak Pendulum Deceleration After 30 msec		G's	<= 29.0	15.87	Pass
Deceleration Decay Time to Cross 5 G's		msec	34.0 to 42.0	36.7	Pass
Maximum "D" Plane Rotation	Maximum	Degrees	64.0 to 78.0	73.0	Pass
	Time	msec	57.0 to 64.0	58.5	Pass
"D" Plane Rotation Decay Time To Zero Crossing		msec	113.0 to 128.0	114.4	Pass
Moment About Occipital Condyle	Maximum	N m	88.1 to 108.5	98.1	Pass
	Time	msec	47.0 to 58.0	49.4	Pass
Positive Moment Decay Time To Zero Crossing		msec	97.0 to 107.0	104.4	Pass
Overall Test Results					Pass


  
\_\_\_\_\_  
Laboratory Technician

01/20/2005  
\_\_\_\_\_  
Test Date


  
\_\_\_\_\_  
Approved By



PENDULUM DECELERATION (G'S) vs TIME (ms)

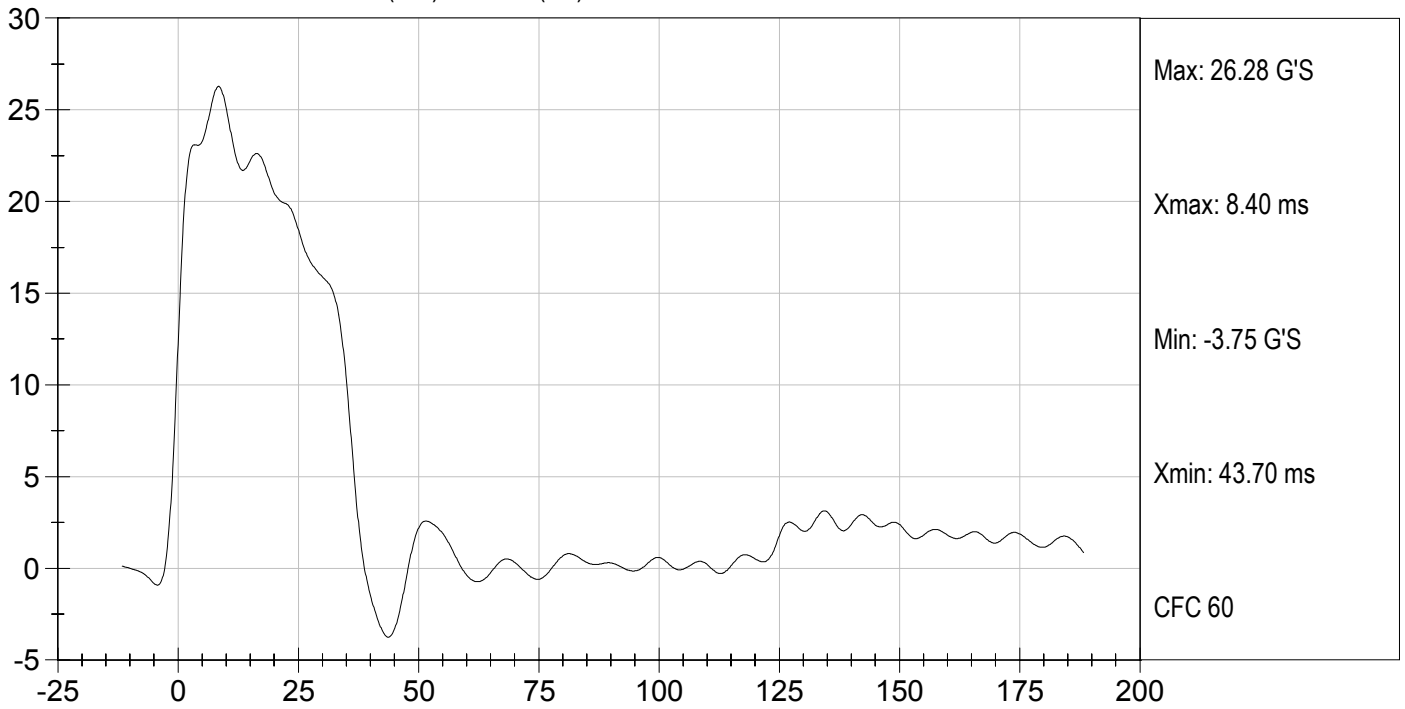


NECK ROTATION (DEG.) vs TIME (ms)

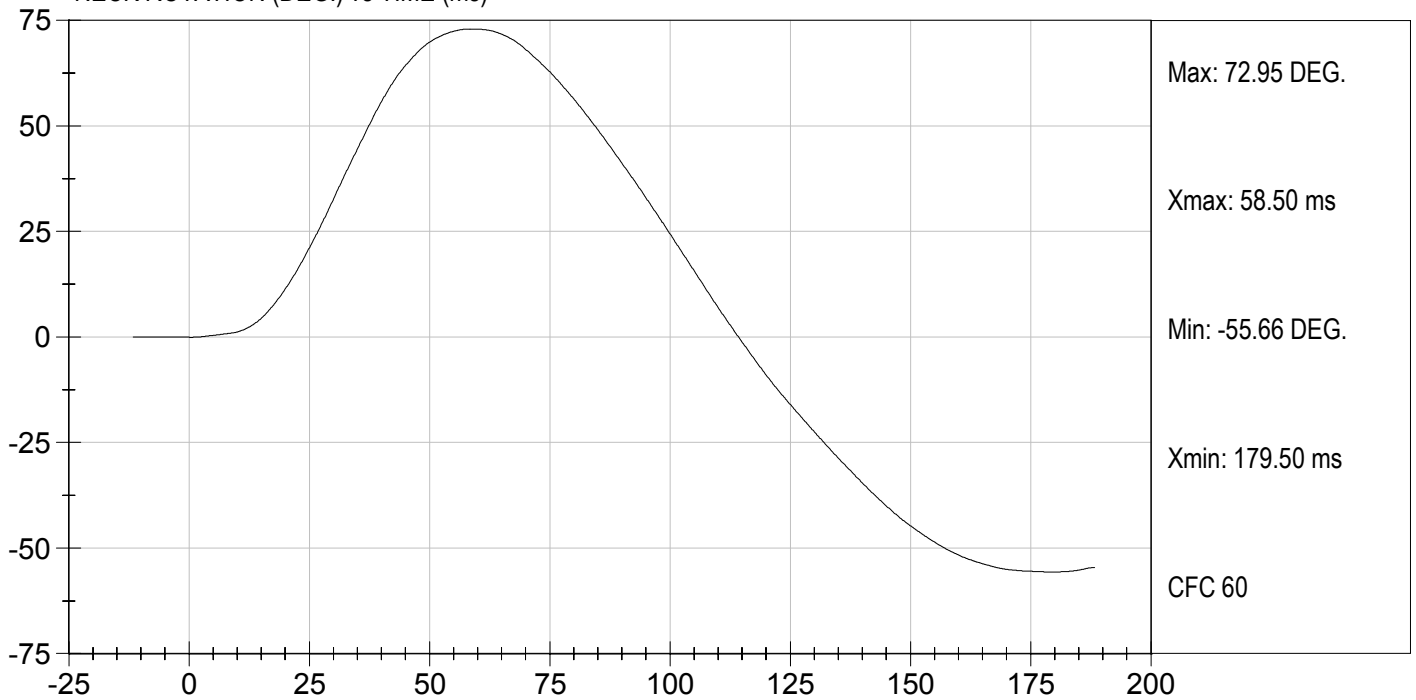



Test Desc: Neck Flexion  
Componet ID: D05142

Test Date: 01/20/2005  
Velocity: 22.82 ft/s, 6.96 m/s

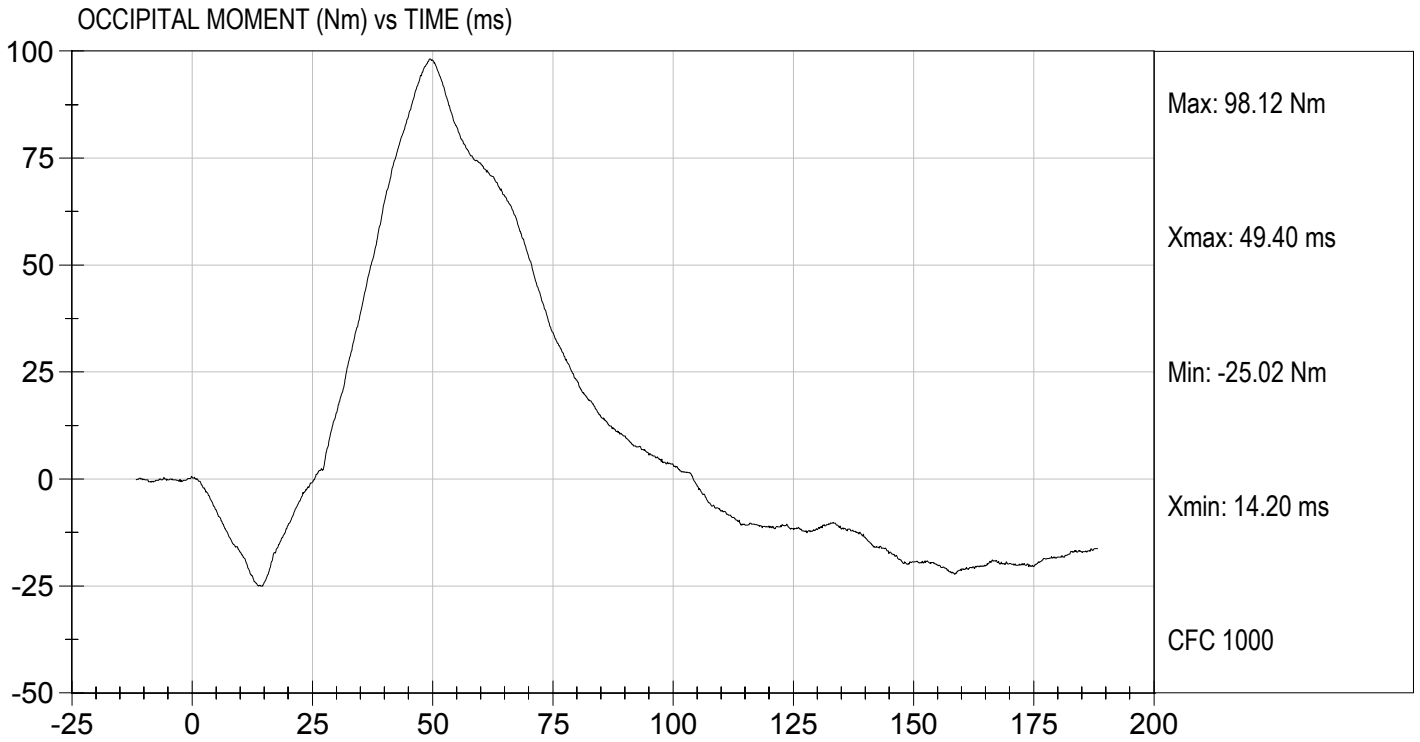

**MGA RESEARCH CORPORATION  
NECK EXTENSION TEST  
HYBRID III 50TH PERCENTILE MALE**

ATD Serial No: 065

Test I.D.: D05143

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	20.9	Pass
Laboratory Relative Humidity		%	10 to 70	22	Pass
Pendulum Velocity		m/s	5.95 to 6.19	5.96	Pass
Pendulum Deceleration	10 msec	G's	17.20 to 21.20	19.56	Pass
	20 msec	G's	14.00 to 19.00	16.54	Pass
	30 msec	G's	11.00 to 16.00	12.37	Pass
Peak Pendulum Deceleration After 30 msec		G's	<= 22.0	13.18	Pass
Deceleration Decay Time to Cross 5 G's		msec	38.0 to 46.0	40.2	Pass
Maximum "D" Plane Rotation	Maximum	Degrees	81.0 to 106.0	99.6	Pass
	Time	msec	72.0 to 82.0	78.1	Pass
"D" Plane Rotation Decay Time To Zero Crossing		msec	147.0 to 174.0	158.2	Pass
Moment About Occipital Condyle	Maximum	N m	-52.9 to -79.9	-67.2	Pass
	Time	msec	65.0 to 79.0	73.0	Pass
Negative Moment Decay Time To Zero Crossing		msec	120.0 to 148.0	145.5	Pass
Overall Test Results					Pass

*Joe Fleck*

\_\_\_\_\_  
Laboratory Technician

01/20/2005

\_\_\_\_\_  
Test Date

*David Winkelbauer*


\_\_\_\_\_  
Approved By




Test Desc: Neck Extension  
Componet ID: D05143

Test Date: 01/20/2005  
Velocity: 19.56 ft/s, 5.96 m/s

PENDULUM DECELERATION (G'S) vs TIME (ms)

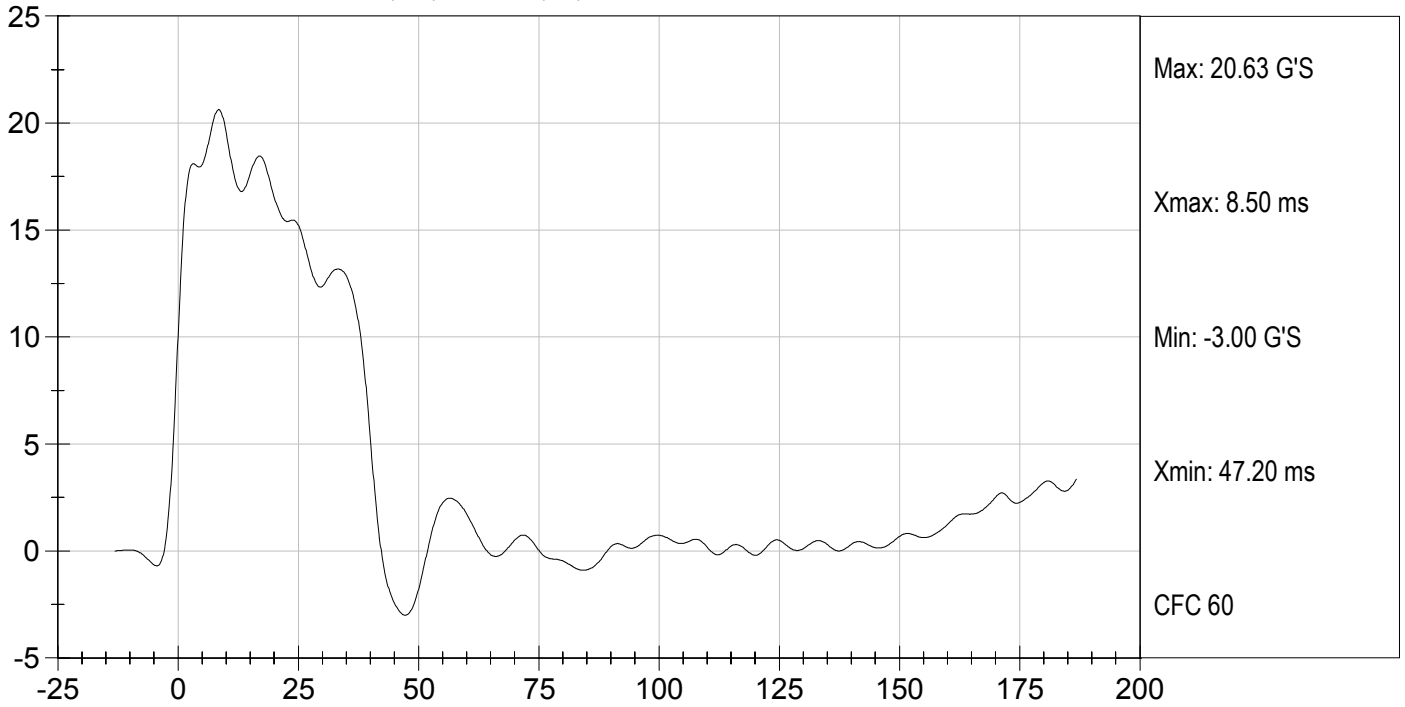


NECK ROTATION (DEG.) vs TIME (ms)

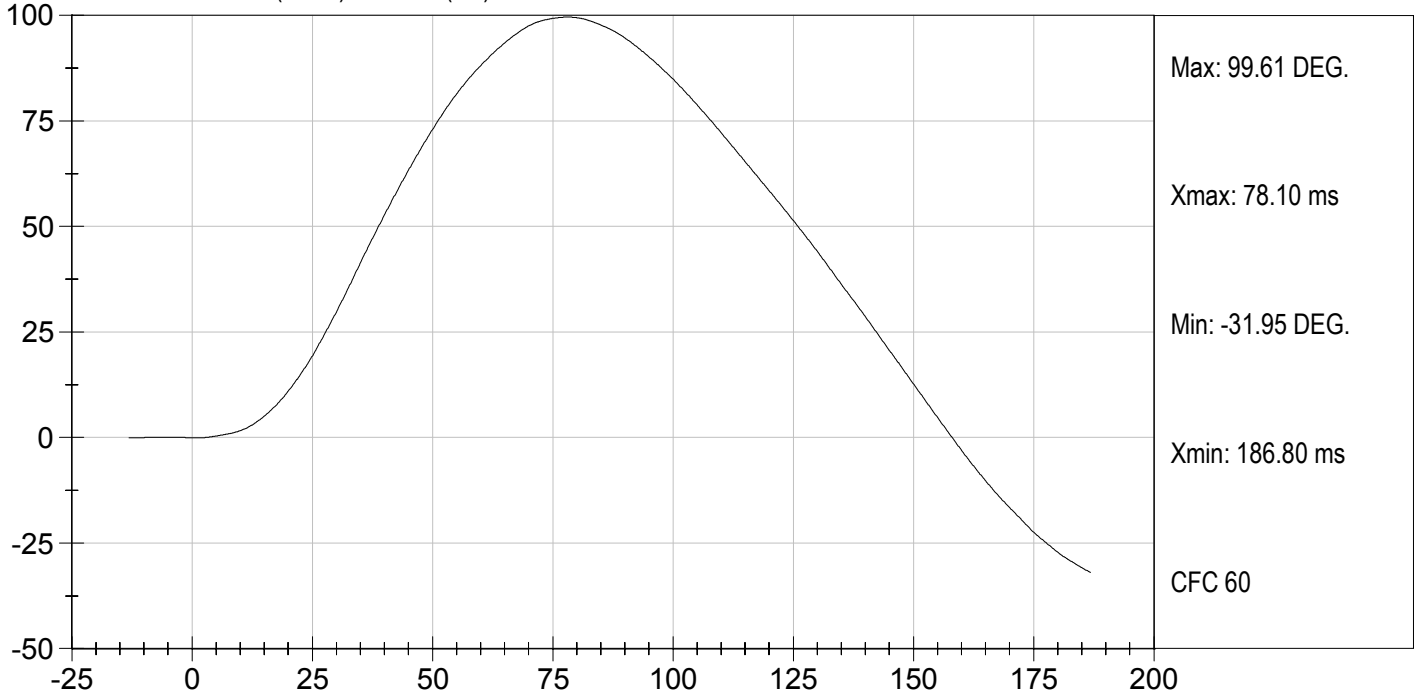



Test Desc: Neck Extension  
Componet ID: D05143

Test Date: 01/20/2005  
Velocity: 19.56 ft/s, 5.96 m/s

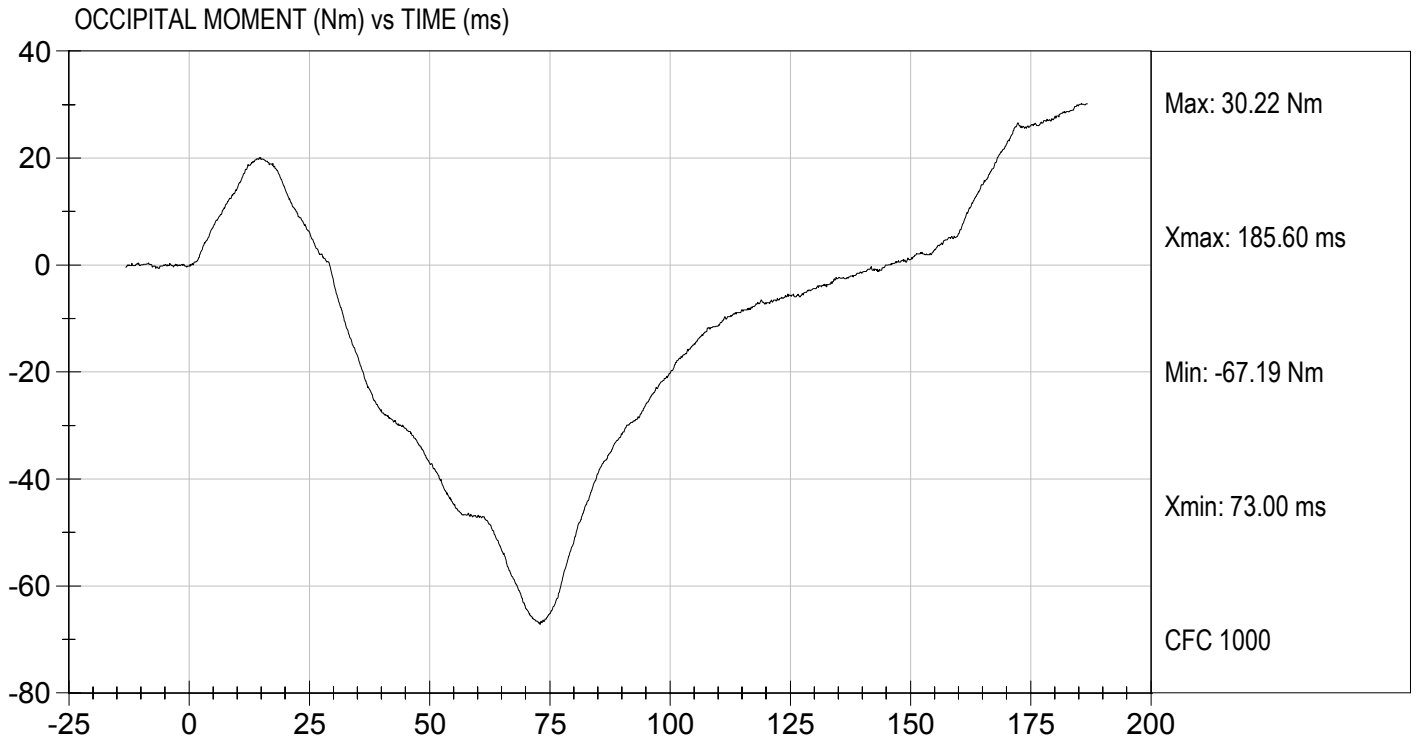

**MGA RESEARCH CORPORATION  
THORAX IMPACT  
HYBRID III 50TH PERCENTILE MALE**

**ATD Serial No:** 065

**Test I.D.:** D05144

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	20.6 to 22.2	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	18	Pass
Probe Velocity	m/s	6.58 to 6.82	6.72	Pass
Peak Probe Force	N	5159 to 5893	5,625	Pass
Peak Sternum Displacement	cm	6.35 to 7.26	6.63	Pass
Internal Hysteresis	%	69 to 85	72	Pass
Overall Test Results				Pass

*Joe Fleck*

\_\_\_\_\_  
Laboratory Technician

01/21/2005

\_\_\_\_\_  
Test Date


*David Winkelbauer*

\_\_\_\_\_  
Approved By



Test Desc: Thorax Impact  
Componet ID: D05144

Test Date: 01/21/2005  
Velocity: 22.05 ft/s, 6.72 m/s

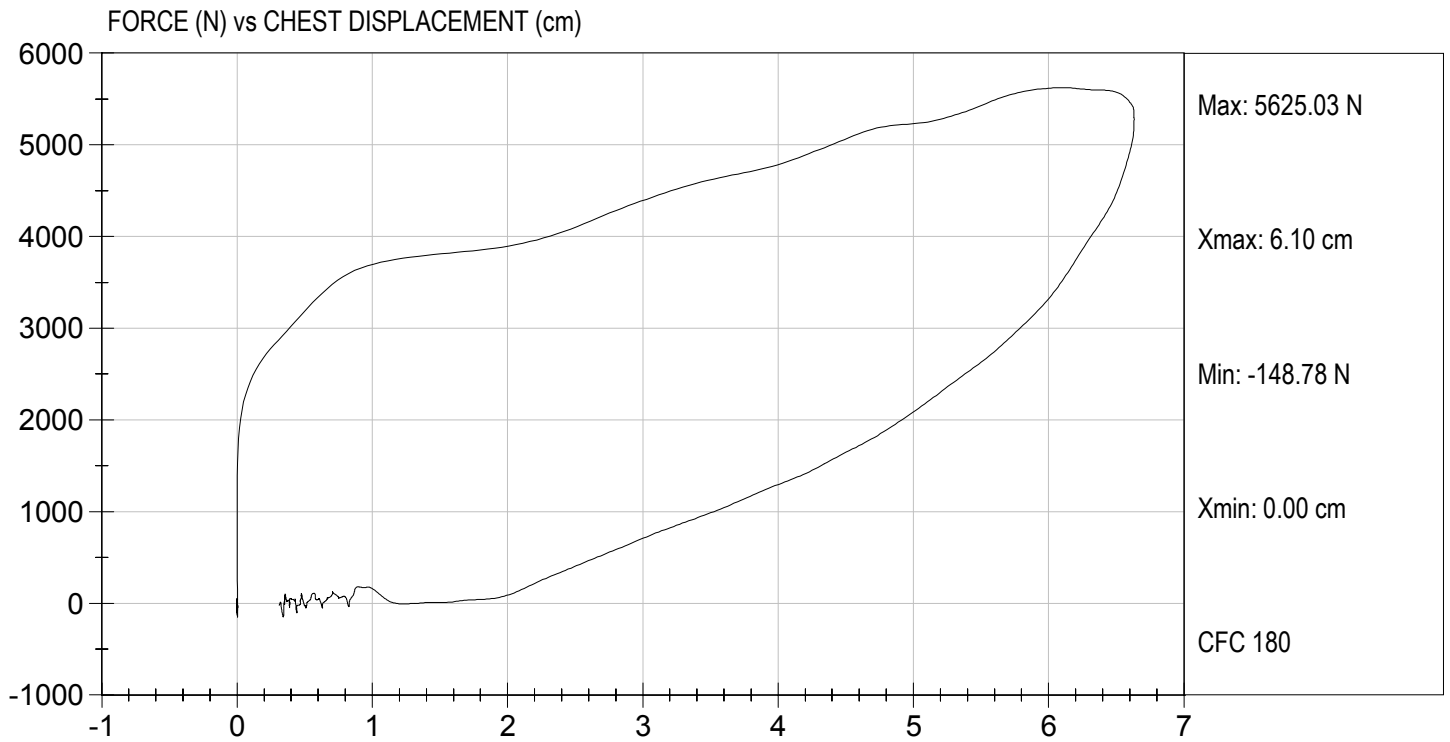

**MGA RESEARCH CORPORATION**  
**RIGHT KNEE IMPACT TEST**  
**HYBRID III 50TH PERCENTILE MALE**

ATD Serial No: 065

Test I.D.: D05145

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.5	21.5	Pass
Laboratory Relative Humidity	%	10 to 70	18	Pass
Probe Velocity	m/sec	2.07 to 2.13	2.08	Pass
Peak Probe Force	Newtons	4715 to 5782	5,073	Pass
Overall Test Results				Pass



\_\_\_\_\_  
 Laboratory Technician

01/21/2005

\_\_\_\_\_  
 Test Date




\_\_\_\_\_  
 Approved By



Test Desc: Right Knee  
Componet ID: D05145

Test Date: 01/21/2005  
Velocity: 6.83 ft/s, 2.08 m/s

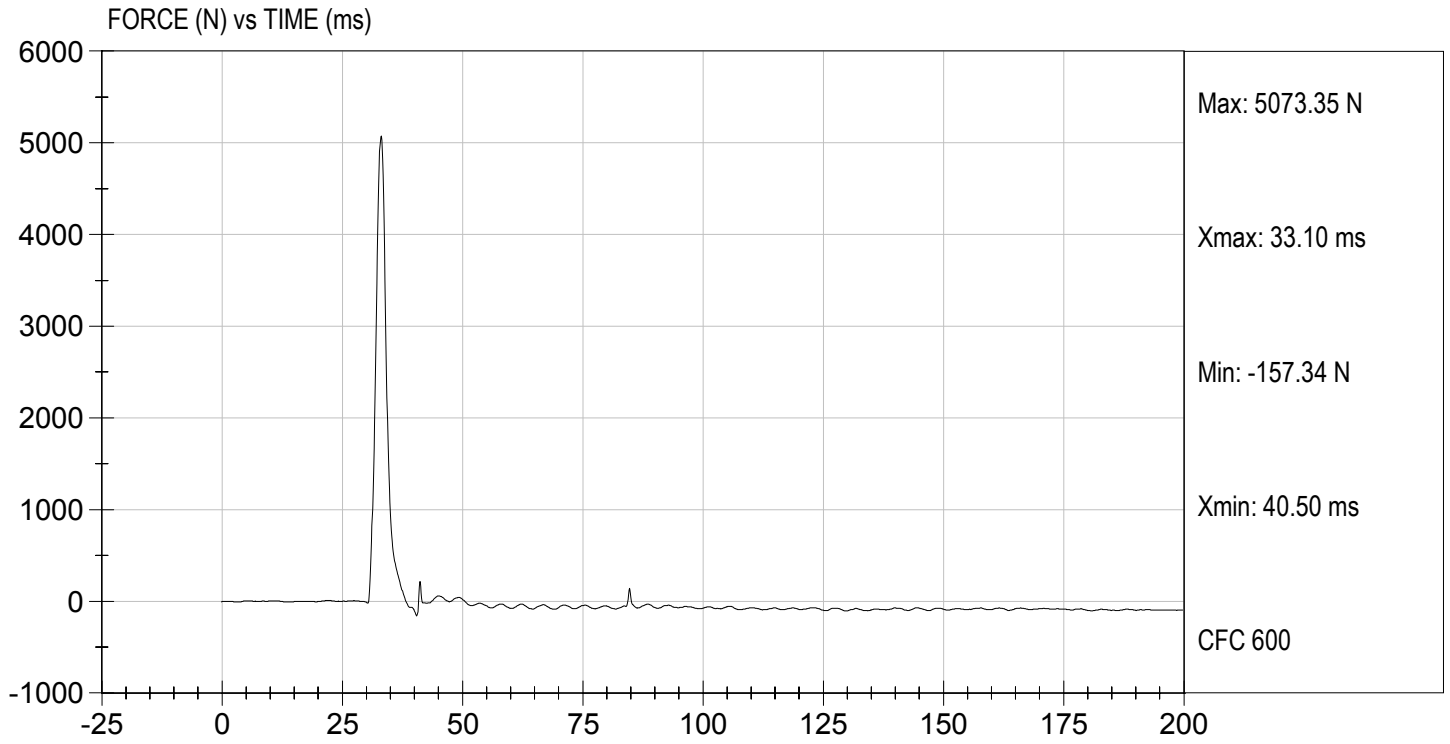

**MGA RESEARCH CORPORATION**  
**LEFT KNEE IMPACT TEST**  
**HYBRID III 50TH PERCENTILE MALE**

ATD Serial No: 065

Test I.D.: D05146

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.5	21.5	Pass
Laboratory Relative Humidity	%	10 to 70	18	Pass
Probe Velocity	m/sec	2.07 to 2.13	2.08	Pass
Peak Probe Force	Newtons	4715 to 5782	5,403	Pass
Overall Test Results				Pass

*Joe Fleck*

\_\_\_\_\_  
 Laboratory Technician

01/21/2005

\_\_\_\_\_  
 Test Date


*David Winkelbauer*

\_\_\_\_\_  
 Approved By



Test Desc: Left Knee  
Componet ID: D05146

Test Date: 01/21/2005  
Velocity: 6.82 ft/s, 2.08 m/s

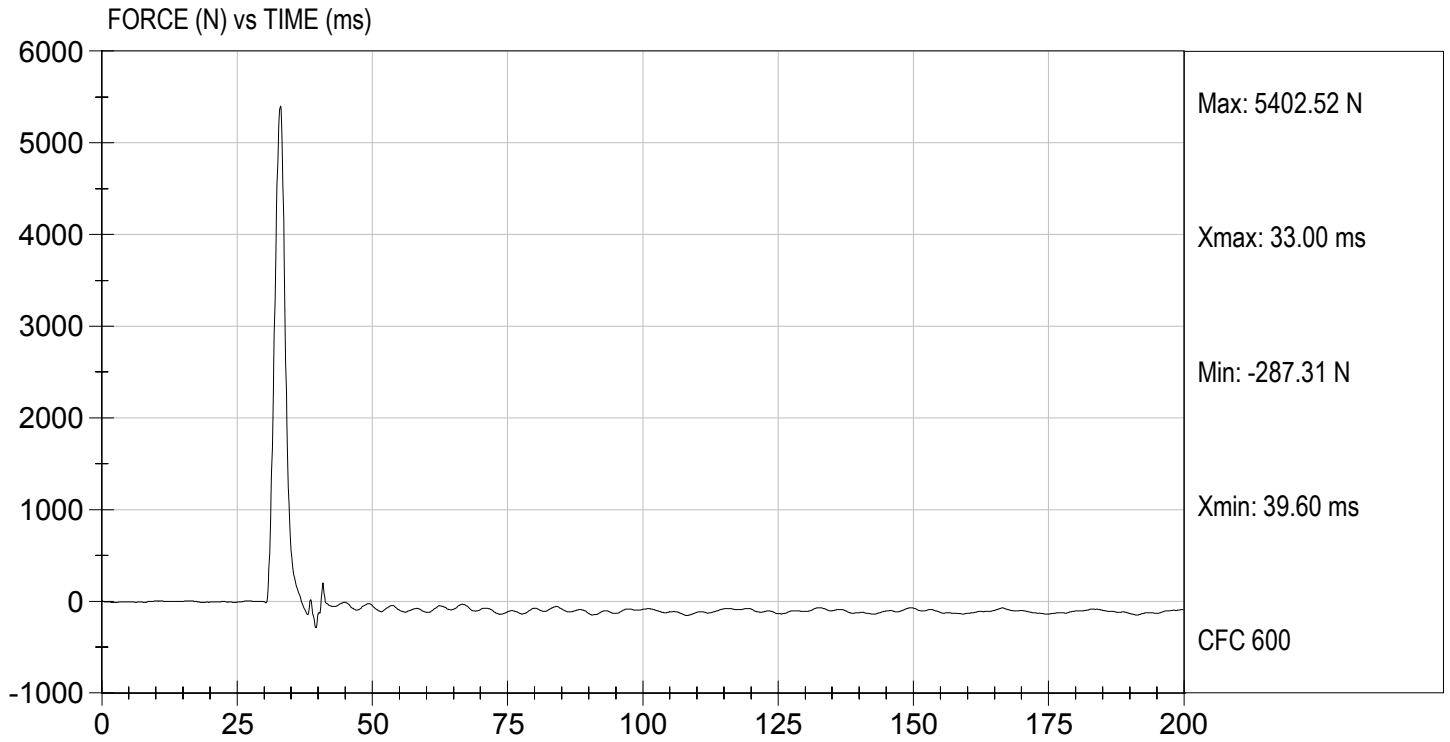

**MGA RESEARCH CORPORATION**  
**HIP-FEMUR FLEXION TEST**  
**HYBRID III 50TH PERCENTILE MALE**

**ATD Serial No:** 065

**Test I.D:** D05140

Tested Parameter	Units	Specification	Result		Pass/Fail
			Right	Left	
Laboratory Temperature	deg C	18.9 to 25.6	21.8	21.8	Pass
Laboratory Relative Humidity	%	10 to 70	18	18	Pass
Rotation Rate	deg/sec	5 -10	8	8	Pass
30 Degrees	Nm	94.9 Nm Max	73.9	76.7	Pass
150 ft-lbf / 203.4 Nm	Deg	40- 50 Degree Max Rotation	43	42	Pass
Overall Test Results					Pass

*Joe Fleck*

\_\_\_\_\_  
 Laboratory Technician

01/21/2005

\_\_\_\_\_  
 Test Date


*David Winkelbauer*

\_\_\_\_\_  
 Approved By



Test Desc: Hip Femur Flexion  
Componet ID: D05149


Test Date: 01/21/2005  
Velocity: 0 ft/s, 0.00 m/s

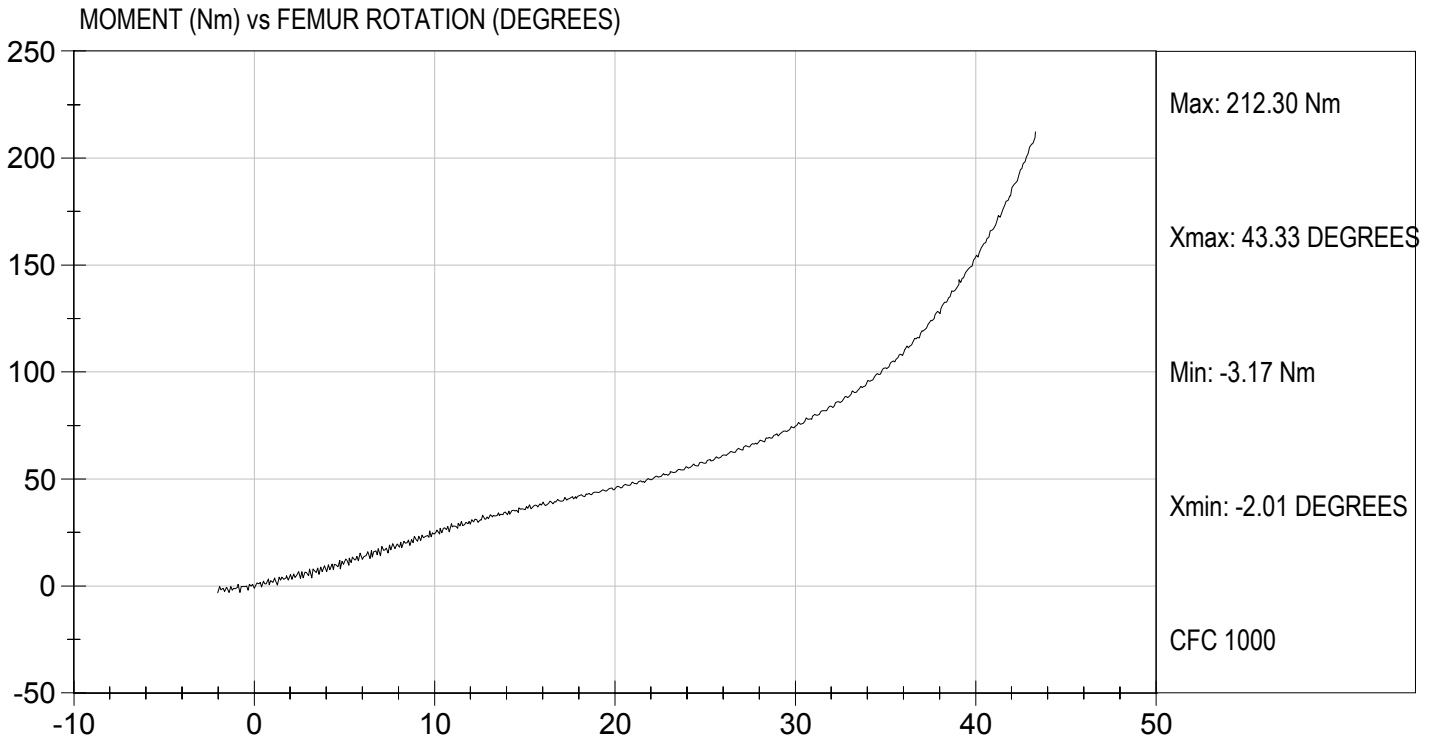



Test Desc: Hip Femur Flexion  
Componet ID: D05140

Test Date: 01/21/2005  
Velocity: 0 ft/s, 0.00 m/s

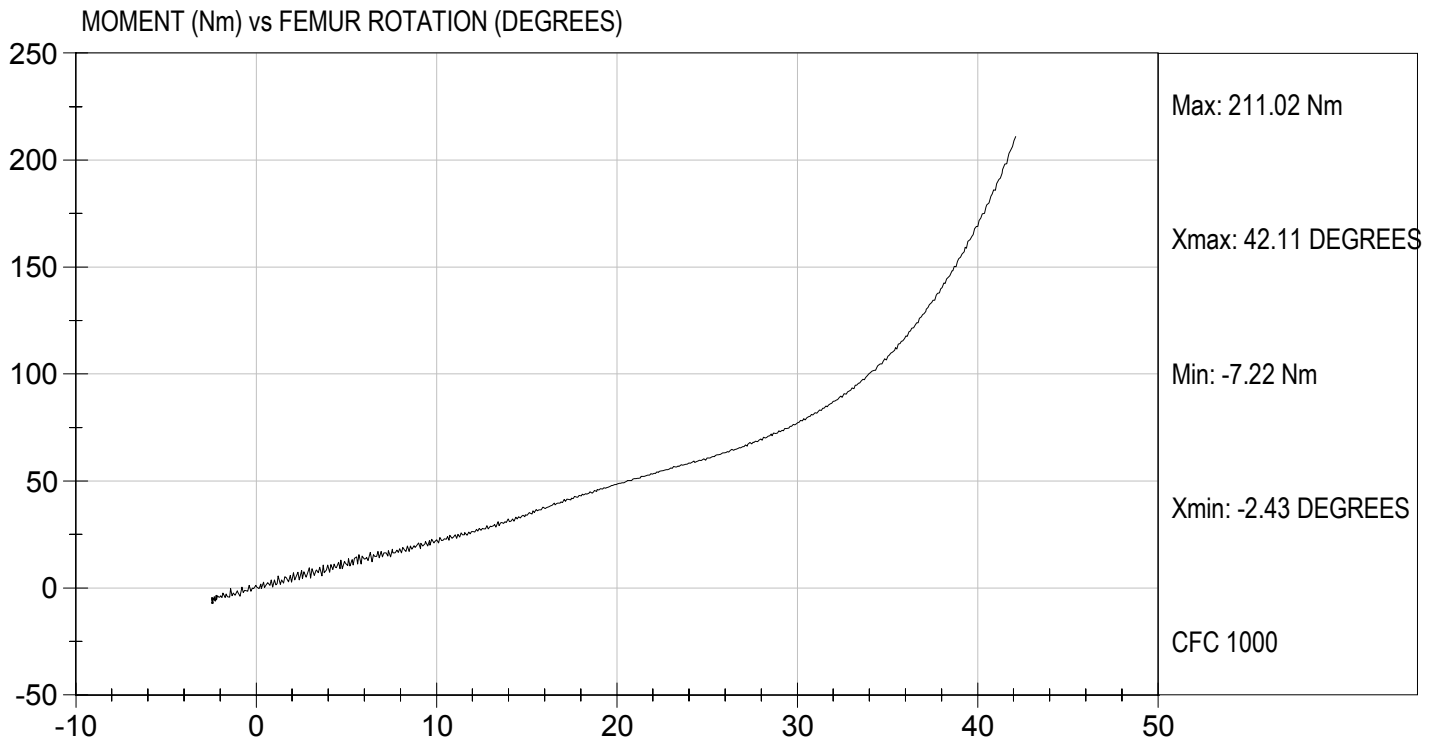

## **APPENDIX D**

### **TEST EQUIPMENT AND INSTRUMENTATION CALIBRATION**

### INSTRUMENTS FOR DRIVER DUMMY NO. 066

	SERIAL NO.	MANUFACTURER	CALIBRATION DATE
Head X	A28-H01	Entran	09/17/04
Head Y	J13535	Endevco	10/25/04
Head Z	A28-H02	Entran	09/17/04
Head X Redundant	A27-Z12	Entran	09/17/04
Head Y Redundant	AH097	Endevco	10/25/04
Head Z Redundant	L17-Z14	Entran	09/17/04
Neck Load Cell	442	Denton	07/20/04
Chest X	J26-H10	Entran	02/01/05
Chest Y	J26-H04	Entran	02/01/05
Chest Z	J26-H09	Entran	02/01/05
Chest Deflection Gauge	066	Servo	08/03/04
Chest X Redundant	J25-R13	Entran	02/01/05
Chest Y Redundant	J26-H01	Entran	02/01/05
Chest Z Redundant	J25-R15	Entran	02/01/05
Pelvis X	J07-H14	Entran	02/01/05
Pelvis Y	J07-H23	Entran	02/01/05
Pelvis Z	I20-J10	Entran	02/01/05
Left Femur Load Cell	259	Denton	07/20/04
Right Femur Load Cell	256	Denton	07/20/04
Left Upper Tibia Load Cell	107	Denton	07/22/04
Left Lower Tibia Load Cell	136	Denton	07/22/04
Right Upper Tibia Load Cell	103	Denton	07/22/04
Right Lower Tibia Load Cell	133	Denton	07/22/04
Left Foot Z – Front	J13-A23	Entran	02/01/05
Left Ankle X	J21-Z03	Entran	02/01/05
Left Ankle Z	J14-J07	Entran	02/01/05
Right Foot Z – Front	J26-H11	Entran	02/01/05
Right Ankle X	J26-H15	Entran	02/01/05
Right Ankle Z	J26-H12	Entran	02/01/05
Shoulder Belt Load Cell	158	Denton	12/07/04
Lap Belt Load Cell	166	Denton	12/07/04

**INSTRUMENTS FOR PASSENGER DUMMY NO. 065**

	SERIAL NO.	MANUFACTURER	CALIBRATION DATE
Head X	P27020	Endevco	02/02/05
Head Y	P27025	Endevco	02/02/05
Head Z	P22692	Endevco	02/02/05
Head X Redundant	J10431	Endevco	02/02/05
Head Y Redundant	P26986	Endevco	02/02/05
Head Z Redundant	AN9E3	Endevco	02/02/05
Neck Load Cell	443	Denton	02/02/05
Chest X	AMT78	Endevco	02/02/05
Chest Y	AP1Y8	Endevco	02/02/05
Chest Z	J11361	Endevco	02/02/05
Chest Deflection Gauge	065	Servo	02/01/05
Chest X Redundant	ALFP5	Endevco	02/02/05
Chest Y Redundant	AP138	Endevco	02/02/05
Chest Z Redundant	AJ9Y3	Endevco	02/02/05
Pelvis X	AJ9D8	Endevco	11/12/04
Pelvis Y	AJ4J3	Endevco	11/12/04
Pelvis Z	AF0M3	Endevco	11/12/04
Left Femur Load Cell	262	Denton	07/20/04
Right Femur Load Cell	261	Denton	07/20/04
Left Upper Tibia Load Cell	266	Denton	07/22/04
Left Lower Tibia Load Cell	179	Denton	07/22/04
Right Upper Tibia Load Cell	263	Denton	07/22/04
Right Lower Tibia Load Cell	174	Denton	07/22/04
Left Foot Z – Front	AMTL6	Endevco	09/17/04
Left Ankle X	AMTG3	Endevco	09/17/04
Left Ankle Z	ALC37	Endevco	09/17/04
Right Foot Z – Front	J21970	Endevco	09/17/04
Right Ankle X	J22033	Endevco	09/17/04
Right Ankle Z	J21691	Endevco	09/17/04
Shoulder Belt Load Cell	157	Denton	08/18/04
Lap Belt Load Cell	194	Denton	12/07/04

### INSTRUMENTS FOR VEHICLE

	SERIAL NO.	MANUFACTURER	CALIBRATION DATE
Left Rear Seat Crossmember X	A08-M10	Entran	09/13/04
Left Rear Seat Crossmember Z	J21-Z01	Entran	12/01/04
Right Rear Seat Crossmember X	J07-M06	Entran	10/29/04
Right Rear Seat Crossmember Z	J21-Z04	Entran	12/01/04
Top of Engine X	I16-B04	Entran	08/25/04
Bottom of Engine X	L17-D08	Entran	09/13/04
Left Brake Caliper X	A08-M02	Entran	09/13/04
Right Brake Caliper X	L17-D01	Entran	09/24/04
Instrument Panel X	K18-D11	Entran	12/02/04