

**REPORT NUMBER: SNCAP-CAL-07-01**

**NEW CAR ASSESSMENT PROGRAM  
SIDE IMPACT TEST**

**GENERAL MOTORS OF CANADA LTD.  
2007 BUICK LACROSSE  
4-DOOR SEDAN**

**NHTSA NUMBER: G70105**

**PREPARED BY:  
CALSPAN CORPORATION  
P.O. BOX 400  
BUFFALO, NEW YORK 14225**



**Test Date: February 13, 2007**

**FINAL REPORT**

**PREPARED FOR:  
U.S. DEPARTMENT OF TRANSPORTATION  
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION  
RULEMAKING  
OFFICE OF CRASHWORTHINESS STANDARDS  
MAIL CODE: NVS-111  
400 SEVENTH STREET, SW, ROOM 5311  
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Safety Administration, in response to Contract Number DTNH22-03-D-22005.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: \_\_\_\_\_  
James Czarnecki, Project Engineer

Date: \_\_\_\_\_

Reviewed by: \_\_\_\_\_  
Michael J. Kilgallon, Program Manager  
Transportation Sciences Center

Date: \_\_\_\_\_

### Technical Report Documentation Page

| <b>1. Report No.</b><br>SNCAP-CAL-07-01                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | <b>2. Government Accession No.</b>                        | <b>3. Recipient's Catalog No.</b>                                                                                                                                                                                              |                  |  |               |              |                                |       |       |                                |       |       |                                          |       |       |                             |    |    |                        |    |    |     |       |       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|--|---------------|--------------|--------------------------------|-------|-------|--------------------------------|-------|-------|------------------------------------------|-------|-------|-----------------------------|----|----|------------------------|----|----|-----|-------|-------|
| <b>4. Title and Subtitle</b><br>Final Report of New Car Assessment Program<br>2007 Buick LaCrosse 4-door Sedan<br>NHTSA No.: G70105                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                           | <b>5. Report Date</b><br>February 13, 2007                                                                                                                                                                                     |                  |  |               |              |                                |       |       |                                |       |       |                                          |       |       |                             |    |    |                        |    |    |     |       |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                           | <b>6. Performing Organization Code</b><br>CAL                                                                                                                                                                                  |                  |  |               |              |                                |       |       |                                |       |       |                                          |       |       |                             |    |    |                        |    |    |     |       |       |
| <b>7. Author(s)</b><br>James Czarnecki, Project Engineer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                           | <b>8. Performing Organization Report No.</b><br>8765-SNCAP-24                                                                                                                                                                  |                  |  |               |              |                                |       |       |                                |       |       |                                          |       |       |                             |    |    |                        |    |    |     |       |       |
| <b>9. Performing Organization Name and Address</b><br>Calspan Corporation Transportation Sciences Center<br>P.O. Box 400<br>Buffalo, New York 14225                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                           | <b>10. Work Unit No.</b>                                                                                                                                                                                                       |                  |  |               |              |                                |       |       |                                |       |       |                                          |       |       |                             |    |    |                        |    |    |     |       |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                           | <b>11. Contract or Grant No.</b><br>DTNH22-03-D-22005                                                                                                                                                                          |                  |  |               |              |                                |       |       |                                |       |       |                                          |       |       |                             |    |    |                        |    |    |     |       |       |
| <b>12. Sponsoring Agency Name and Address</b><br>U.S. Department of Transportation<br>National Highway Traffic Safety Administration<br>Rulemaking, Office of Crashworthiness Standards<br>Mail Code: NVS-111<br>400 Seventh Street, SW, Room 5311<br>Washington, D.C. 20590                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                           | <b>13. Type of Report and Period Covered:</b><br><i>Final Report</i><br>February 2007                                                                                                                                          |                  |  |               |              |                                |       |       |                                |       |       |                                          |       |       |                             |    |    |                        |    |    |     |       |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                           | <b>14. Sponsoring Agency Code</b><br>NVS-111                                                                                                                                                                                   |                  |  |               |              |                                |       |       |                                |       |       |                                          |       |       |                             |    |    |                        |    |    |     |       |       |
| <b>15. Supplementary Notes</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                           |                                                                                                                                                                                                                                |                  |  |               |              |                                |       |       |                                |       |       |                                          |       |       |                             |    |    |                        |    |    |     |       |       |
| <b>16. Abstract</b><br>A 55/28 kph 90° Impact Moving Deformable Barrier NCAP Side Impact Test was conducted on the subject 2007 Buick LaCrosse 4-door Sedan in accordance with the specifications of the Office of Crashworthiness Standards Test Procedure for the generation of consumer information on vehicle side crash protection. This test was conducted at the Calspan Corporation Crash Test Facility in Buffalo, New York, on February 13, 2007. The impact velocity of the Moving Deformable Barrier (MDB) was 62.12 km/h, and the ambient temperature at the struck side (driver side) of the vehicle was 21.0°C. The target vehicle's maximum post test static crush was 292 mm at level 2. The test vehicle's occupant performance is as follows: <table style="margin-left: auto; margin-right: auto; border: none;"> <thead> <tr> <th></th> <th style="text-align: center;"><u>DRIVER</u></th> <th style="text-align: center;"><u>PASS.</u></th> </tr> </thead> <tbody> <tr> <td>Left Upper Rib (LUR) Accel., g</td> <td style="text-align: center;">72.57</td> <td style="text-align: center;">59.05</td> </tr> <tr> <td>Left Lower Rib (LLR) Accel., g</td> <td style="text-align: center;">88.62</td> <td style="text-align: center;">69.07</td> </tr> <tr> <td>Lower Spine (T<sub>12</sub>) Accel., g</td> <td style="text-align: center;">80.56</td> <td style="text-align: center;">67.66</td> </tr> <tr> <td>Thoracic Trauma Index (TTI)</td> <td style="text-align: center;">84</td> <td style="text-align: center;">68</td> </tr> <tr> <td>Pelvis (PEV) Accel., g</td> <td style="text-align: center;">74</td> <td style="text-align: center;">52</td> </tr> <tr> <td>HIC</td> <td style="text-align: center;">238.6</td> <td style="text-align: center;">680.9</td> </tr> </tbody> </table> <p>The doors on the struck side of the vehicle did not separate from the body at the hinges or latches and the opposite doors did not open during the side impact event.</p> |                                                           |                                                                                                                                                                                                                                |                  |  | <u>DRIVER</u> | <u>PASS.</u> | Left Upper Rib (LUR) Accel., g | 72.57 | 59.05 | Left Lower Rib (LLR) Accel., g | 88.62 | 69.07 | Lower Spine (T <sub>12</sub> ) Accel., g | 80.56 | 67.66 | Thoracic Trauma Index (TTI) | 84 | 68 | Pelvis (PEV) Accel., g | 74 | 52 | HIC | 238.6 | 680.9 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <u>DRIVER</u>                                             | <u>PASS.</u>                                                                                                                                                                                                                   |                  |  |               |              |                                |       |       |                                |       |       |                                          |       |       |                             |    |    |                        |    |    |     |       |       |
| Left Upper Rib (LUR) Accel., g                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 72.57                                                     | 59.05                                                                                                                                                                                                                          |                  |  |               |              |                                |       |       |                                |       |       |                                          |       |       |                             |    |    |                        |    |    |     |       |       |
| Left Lower Rib (LLR) Accel., g                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 88.62                                                     | 69.07                                                                                                                                                                                                                          |                  |  |               |              |                                |       |       |                                |       |       |                                          |       |       |                             |    |    |                        |    |    |     |       |       |
| Lower Spine (T <sub>12</sub> ) Accel., g                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 80.56                                                     | 67.66                                                                                                                                                                                                                          |                  |  |               |              |                                |       |       |                                |       |       |                                          |       |       |                             |    |    |                        |    |    |     |       |       |
| Thoracic Trauma Index (TTI)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 84                                                        | 68                                                                                                                                                                                                                             |                  |  |               |              |                                |       |       |                                |       |       |                                          |       |       |                             |    |    |                        |    |    |     |       |       |
| Pelvis (PEV) Accel., g                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 74                                                        | 52                                                                                                                                                                                                                             |                  |  |               |              |                                |       |       |                                |       |       |                                          |       |       |                             |    |    |                        |    |    |     |       |       |
| HIC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 238.6                                                     | 680.9                                                                                                                                                                                                                          |                  |  |               |              |                                |       |       |                                |       |       |                                          |       |       |                             |    |    |                        |    |    |     |       |       |
| <b>17. Key Words</b><br>New Car Assessment Program (NCAP)<br>Side Impact<br>Side Impact Hybrid III Dummy (SID/HIII)<br>Occupant Side Impact Protection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                           | <b>18. Distribution Statement</b><br>Copies of this report are available from:<br>National Highway Traffic Safety Adm.<br>Technical Ref. Division,<br>Room 5111 (NAD-52)<br>400 Seventh Street, S.W.<br>Washington, D.C. 20590 |                  |  |               |              |                                |       |       |                                |       |       |                                          |       |       |                             |    |    |                        |    |    |     |       |       |
| <b>19. Security Class. (of this report)</b><br>Unclassified                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <b>20. Security Class. (of this page)</b><br>Unclassified | <b>21. No. of Pages</b><br>121                                                                                                                                                                                                 | <b>22. Price</b> |  |               |              |                                |       |       |                                |       |       |                                          |       |       |                             |    |    |                        |    |    |     |       |       |

## TABLE OF CONTENTS

| <u>Section</u>            |                                                          | <u>Page No.</u>     |
|---------------------------|----------------------------------------------------------|---------------------|
| 1                         | Purpose and Test Procedure                               | 1-1                 |
| 2                         | Summary of NCAP Side Impact Test                         | 2-1                 |
| <br><u>Data Sheet No.</u> |                                                          | <br><u>Page No.</u> |
| 1                         | General Test and Vehicle Parameter Data                  | 2-3                 |
| 2                         | Test Vehicle Tire Information                            | 2-5                 |
| 3                         | Test Vehicle Information                                 | 2-6                 |
| 4                         | Moving Deformable Barrier (MDB) Summary of Results       | 2-8                 |
| 5                         | Post Test Observations                                   | 2-9                 |
| 6                         | Vehicle Pre-Test and Post Test Measurements              | 2-10                |
| 7                         | SID/HIII Longitudinal Clearance Dimensions               | 2-11                |
| 8                         | SID/HIII Lateral Clearance Dimensions                    | 2-12                |
| 9                         | Vehicle Side Measurements                                | 2-13                |
| 10                        | Vehicle Exterior Crush Profiles                          | 2-14                |
| 11                        | Vehicle Damage Profile Distances                         | 2-15                |
| 12                        | Deformable Barrier Honeycomb Face Static Crush           | 2-16                |
| 13                        | Vehicle Accelerometer Locations                          | 2-17                |
| 14                        | MDB Accelerometer Locations                              | 2-18                |
| 15                        | Vehicle Structural Measurements                          | 2-19                |
| 16                        | High Speed Camera Locations and Data                     | 2-20                |
| 17                        | Summary of FMVSS 301 Data                                | 2-21                |
| <br><u>Appendix</u>       |                                                          | <br><u>Page No</u>  |
| A                         | Photographs                                              | A-1                 |
| B                         | SID/HIII, Vehicle and MDB Response Data                  | B-1                 |
| C                         | SID/HIII Configuration and Performance Verification Data | C-1                 |
| D                         | Test Equipment and Calibration Information               | D-1                 |

## **SECTION 1**

### **PURPOSE AND TEST PROCEDURE**

#### **PURPOSE**

This side impact test was conducted as part of the FY' 2006 test program sponsored by the National Highway Traffic Safety Administration (NHTSA), under Contract No. DTNH22-03-D-22005. The purpose of this test was to evaluate side impact protection in a 2007 Buick LaCrosse 4-door Sedan manufactured by General Motors of Canada LTD.. The side impact test was conducted in accordance with the Laboratory Test Procedure for New Car Assessment Program Side Impact Testing dated July 1997.

## **SECTION 2**

### **SUMMARY OF NCAP SIDE IMPACT TEST**

A model year 2007 Buick LaCrosse 4-door Sedan was impacted on the left (driver's) side by a Moving Deformable Barrier (MDB) which was moving forward in a 27° crabbed position to the tow road guidance system at a velocity of 62.12 km/h. The specified impact velocity range is from 61.1 to 62.7 km/h. The test (target) vehicle was stationary and positioned 63° to the line of forward motion. The weight of the vehicle as tested was 1838 kg and the test weight of the MDB was 1362.5 kg. The test was conducted at the Calspan Corporation Transportation Sciences Center on February 13, 2007.

One (1) real-time motion picture camera and ten (10) high-speed motion picture cameras were used to document the impact event. The pre-test and post-test conditions were recorded by one (1) real-time motion picture camera. Camera locations and pertinent camera information are documented in the data sheets. Pre- and post-test photographs of the vehicle and Side Impact Dummies (SID/HIIIs) can be found in Appendix A.

Two 50th percentile adult male SID/HIII's were placed in the driver (P1) and left rear passenger (P4) designated seating positions according to instructions specified in the Laboratory Test Procedure for New Car Assessment Program Side Impact Testing dated July 1997. Each SID/HIII was instrumented in the following locations:

- Left Upper Rib (LUR) uni-axial accelerometer (Y-axis primary and redundant)
- Left Lower Rib (LLR) uni-axial accelerometer (Y-axis primary and redundant)
- Lower Thoracic Spine (T12) uni-axial accelerometer (Y-axis primary and redundant)
- Pelvic (PEV) section uni-axial accelerometer (Y-axis primary and redundant)
- Head Center of Gravity (CG) tri-axial accelerometers (X, Y and Z axes primary and redundant)
- Upper Neck load cell (Fx, Fy, Fz, Mx, My, Mz)

The test vehicle was instrumented with twenty-one (21) structural accelerometers and the MDB was instrumented with five (5) accelerometers.

## **2.2 GENERAL COMMENTS**

The test vehicle sustained a maximum static crush of 292 mm at level 2, 1050 mm rearward of the left vertical impact point. The driver and passenger SID/HIII's, Serial Nos. 269 and 270 respectively, were calibrated just prior to this test.

Test data and observations are presented in this section of the report. Appendix A contains the still photograph prints. Appendix B contains the driver and passenger SID/HIII's, vehicle, and MDB response data traces. Appendix C contains the SID/HIII's configuration and performance verification data. Appendix D contains the test equipment information.

The occupant data is summarized below:

| ATD position | HIC(36) | T <sub>1</sub> | T <sub>2</sub> | TTI (G's) | Peak Pelvis (G's) |
|--------------|---------|----------------|----------------|-----------|-------------------|
| Driver       | 238.6   | 35.9           | 58.6           | 84        | 74                |
| Passenger    | 680.9   | 47.0           | 53.0           | 68        | 52                |

#### SUPPLEMENTAL RESTRAINT INFORMATION

| Restraint Type                     | Left Front (Driver) |          | Left Rear (Passenger) |          |
|------------------------------------|---------------------|----------|-----------------------|----------|
|                                    | Installed           | Deployed | Installed             | Deployed |
| Front Airbag                       | Yes                 | No       | NA                    | NA       |
| Side Torso Airbag                  | No                  | No       | NA                    | NA       |
| Side Head/Torso Combination Airbag | NA                  | NA       | NA                    | NA       |
| Curtain Airbag                     | Yes                 | Yes      | Yes                   | Yes      |

The test instrumentation data listed in Appendix B can be found on the NHTSA website:  
[www.nhtsa.dot.gov](http://www.nhtsa.dot.gov).

**DATA SHEET NO. 1****GENERAL TEST AND VEHICLE PARAMETER DATA**

|               |                     |            |                   |
|---------------|---------------------|------------|-------------------|
| Test Vehicle: | 2007 Buick LaCrosse | NHTSA No.  | G70105            |
| Test Program: | NCAP Side Impact    | Test Date: | February 13, 2007 |

**TEST VEHICLE INFORMATION AND VEHICLE OPTIONS**

|                       |                                    |                                                       |     |
|-----------------------|------------------------------------|-------------------------------------------------------|-----|
| Make                  | General Motors of Canada LTD.      | Driver Front Airbag                                   | Yes |
| Model                 | LaCrosse                           | Driver Side Curtain Airbag                            | Yes |
| Body Style            | 4-door Sedan                       | Driver Side Torso Airbag                              | No  |
| NHTSA No.             | G70105                             | Driver Pretensioners                                  | Yes |
| VIN                   | 2G4WC582771171973                  | Driver Load Limiters                                  | Yes |
| Color                 | Dark Garnet                        | Driver Power Seats                                    | Yes |
| Engine Disp.(L)       | 3.8                                | Rear Pass. Side Curtain Airbag                        | Yes |
| Engine Cylinders      | 6                                  | Rear Pass. Side Torso Airbag                          | No  |
| Engine Placement      | Lateral                            | Rear Pass. Pretensioners                              | No  |
| Transmission Type     | Automatic                          | Rear Pass. Load Limiters                              | No  |
| Transmission Speeds   | 4                                  | Rear Pass. Power Seats                                | NA  |
| Final Drive           | Front                              | Tilt Wheel                                            | Yes |
| Air Conditioning      | Yes                                | Anti-lock Brakes                                      | Yes |
| Power Steering        | Yes                                | Traction Control                                      | Yes |
| Power Brakes          | Yes                                | Power Windows                                         | Yes |
| Delivery Date         | 2/8/07                             | Power Door Locks                                      | Yes |
| Odometer Reading (km) | 23                                 | Automatic Door Locks (ADL)                            | Yes |
| Dealer                | Jim Murphy Pontiac Buick GMC, Inc. | Owner's Manual Details Instructions on Disabling ADLs | Yes |

**DATA FROM CERTIFICATION LABEL**

|                     |                               |                 |      |
|---------------------|-------------------------------|-----------------|------|
| Manufactured By     | General Motors of Canada LTD. | GVWR (kg)       | 2044 |
| Date of Manufacture | 10/06                         | GAWR Front (kg) | 1115 |
|                     |                               | GAWR Rear (kg)  | 929  |

**VEHICLE CAPACITY DATA**

| Measured Parameter      | Front  | Rear  | Third | Total |
|-------------------------|--------|-------|-------|-------|
| Type of Seats           | Bucket | Bench |       |       |
| Number Of Occupants     | 2      | 3     |       | 5     |
| Capacity Wt. (VCW) (kg) |        |       |       | 416   |
| Cargo Wt. (RCLW) (kg)   |        |       |       | 75.8  |



**DATA SHEET NO. 1 (continued)****GENERAL TEST AND VEHICLE PARAMETER DATA**

|               |                     |            |                   |
|---------------|---------------------|------------|-------------------|
| Test Vehicle: | 2007 Buick LaCrosse | NHTSA No.  | G70105            |
| Test Program: | NCAP Side Impact    | Test Date: | February 13, 2007 |

**TEST VEHICLE WEIGHTS**

|        | Units | As Delivered (UVW)<br>(Axle) |       |        | Fully Loaded (Axle) |       |        | As Tested (ATW) (Axle) |       |        |
|--------|-------|------------------------------|-------|--------|---------------------|-------|--------|------------------------|-------|--------|
|        |       | Front                        | Rear  | Total  | Front               | Rear  | Total  | Front                  | Rear  | Total  |
| Left   | kg    | 500.5                        | 295.0 |        | 551.5               | 405.5 |        | 546.0                  | 400.5 |        |
| Right  | kg    | 518.0                        | 294.5 |        | 521.5               | 372.0 |        | 522.5                  | 369.0 |        |
| Ratio  | %     | 63.3                         | 36.7  |        | 58.0                | 42.0  |        | 58.1                   | 41.9  |        |
| Totals | kg    | 1018.5                       | 589.5 | 1608.0 | 1073.0              | 777.5 | 1850.5 | 1068.5                 | 769.5 | 1838.0 |

**TARGET TEST WEIGHT CALCULATION**

| Measured Parameter                      | Units | Value  |
|-----------------------------------------|-------|--------|
| Total Delivered Weight (UVW)            | kg    | 1608   |
| Weight of 2 P572E ATDs (81.2 kg each)   | kg    | 162.4  |
| Rated Cargo/Luggage Weight (RCLW)       | kg    | 75.8   |
| Calculated Vehicle Target Weight (TVTW) | kg    | 1846.2 |

\* Actual As Tested Weight (ATW) will be TVTW -4.5/-9.1 kg

Weight of Ballast (including instrumentation package and cameras): 67.6 kg

**TEST VEHICLE ATTITUDES**

|              | Units | LF  | RF  | LR  | RR  |
|--------------|-------|-----|-----|-----|-----|
| As Delivered | mm    | 751 | 748 | 753 | 741 |
| Fully Loaded | mm    | 731 | 704 | 746 | 714 |
| As Tested    | mm    | 737 | 705 | 747 | 715 |


**TEST VEHICLE VERTICAL IMPACT LINE AND CG**

| Measurement Description               | Units | Value |
|---------------------------------------|-------|-------|
| Test Vehicle Wheel Base               | mm    | 2815  |
| Target Impact Point Aft of Front Axle | mm    | 468   |
| Actual Impact Point Aft of Front Axle | mm    | 484   |
| As Tested CG (aft of front axle)      | mm    | 1179  |

## DATA SHEET NO. 2

### TEST VEHICLE TIRE INFORMATION

|               |                     |            |                   |
|---------------|---------------------|------------|-------------------|
| Test Vehicle: | 2007 Buick LaCrosse | NHTSA No.  | G70105            |
| Test Program: | NCAP Side Impact    | Test Date: | February 13, 2007 |

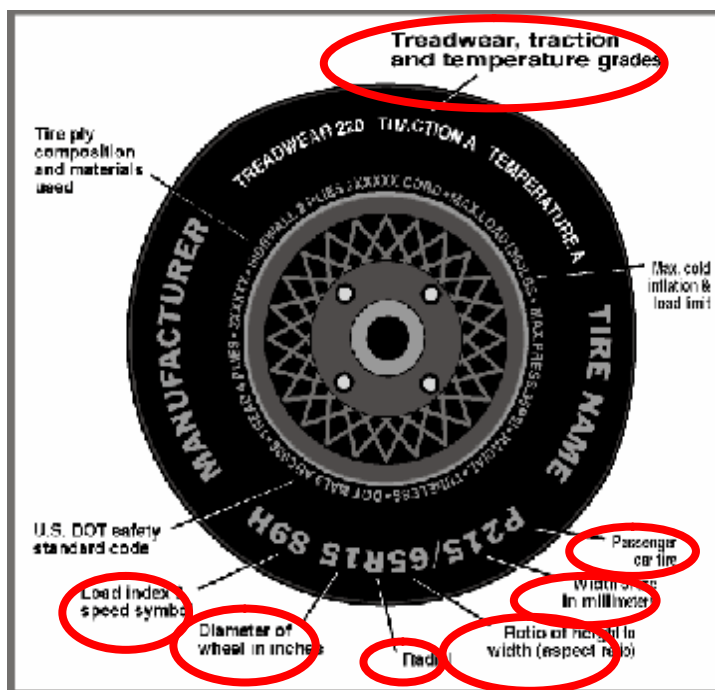

### DATA FROM TIRE PLACARD

| Measured Parameter                      | Front      | Rear       |
|-----------------------------------------|------------|------------|
| Maximum Tire Pressure (kPa)             | 300        | 300        |
| Cold / Test Pressure (kPa)              | 210        | 210        |
| Recommended Tire Size                   | P225/60R16 | P225/60R16 |
| Tire Size on Vehicle                    | P225/60R16 | P225/60R16 |
| Tire Manufacturer                       | Goodyear   | Goodyear   |
| Tire Name                               | Integrity  | Integrity  |
| Tire Type                               | Passenger  | Passenger  |
| Tire Width (mm)                         | 225        | 225        |
| Ratio of Height to Width (aspect ratio) | 60         | 60         |
| Radial                                  | Radial     | Radial     |
| Wheel Diameter                          | 16         | 16         |
| Load Index & Speed Symbol               | 97S        | 97S        |
| Treadwear                               | 460        | 460        |
| Traction Grade                          | A          | A          |
| Temperature Grade                       | B          | B          |


## DATA SHEET NO. 3

### TEST VEHICLE INFORMATION

|               |                     |            |                   |
|---------------|---------------------|------------|-------------------|
| Test Vehicle: | 2007 Buick LaCrosse | NHTSA No.  | G70105            |
| Test Program: | NCAP Side Impact    | Test Date: | February 13, 2007 |

#### NORMAL DESIGN RIDING POSITION

The driver and passenger seat back is positioned to the manufacturer's designated angle.

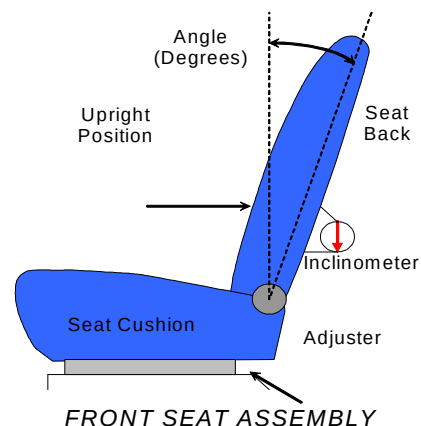


#### SEAT BACK POSITION

|                                                  | Driver Seat                                      | Rear Seat      |
|--------------------------------------------------|--------------------------------------------------|----------------|
| Test Detent (forward-most detent defined as 0)   | Detent 7*                                        | Not Adjustable |
| Angle (deg. from forward-most locking position)  | From 0 on rocker to 14.7° on Head restraint post | Not Adjustable |
| Alternative Measurements to Verify Test Position | Head restraint post 14.7° back from vertical*    | NA             |

#### SEAT FORE/AFT POSITIONS

The total seat travel was measured from forward most position to rearmost position irrespective of vertical seat height in those positions. The seat was set at the longitudinal mid position with vertical adjustment at the lowest position obtainable for both the driver and passenger.

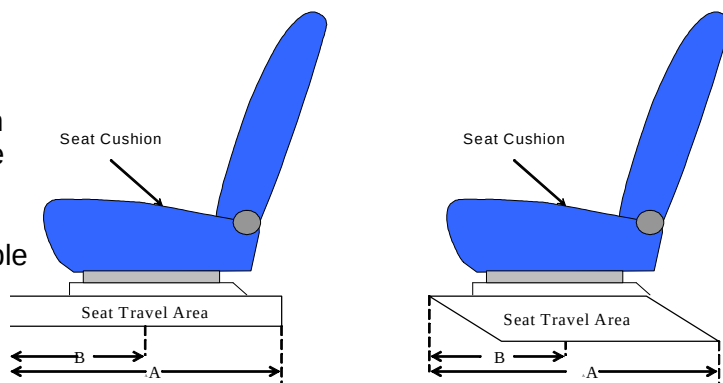

#### SEAT FORE/AFT POSITION

|                                                | Driver Seat    | Rear Seat  |
|------------------------------------------------|----------------|------------|
| Total Fore/Aft Travel (A) (mm)                 | 270            | NA         |
| Test Position (B) (mm)                         | 135            | NA         |
| Test Detent (forward-most detent defined as 0) | Electric Power | NA         |
| Total Number of Detents (including 0)          | Electric Power | FIXED SEAT |


## DATA SHEET NO. 3 (CONTINUED)

### TEST VEHICLE INFORMATION

|                                   |                              |
|-----------------------------------|------------------------------|
| Test Vehicle: 2007 Buick LaCrosse | NHTSA No. G70105             |
| Test Program: NCAP Side Impact    | Test Date: February 13, 2007 |

#### FUEL SYSTEM INFORMATION

The test vehicle is equipped with an electric fuel pump. The fuel pump operates for approximately two seconds after the ignition is placed in the "ON" position, after which the fuel pump automatically shuts off. The fuel filler door is located on the left rear fender. The standard fuel tank occupies the area under the rear seat.

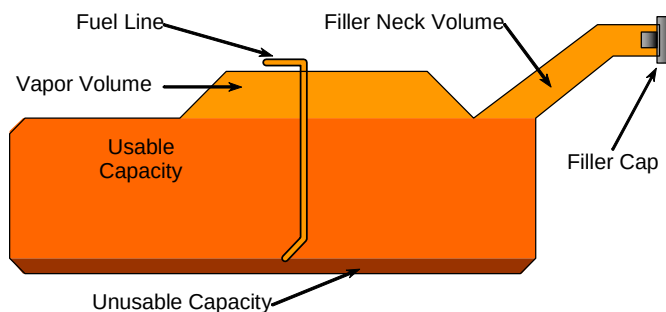


VEHICLE FUEL TANK ASSEMBLY

#### FUEL TANK CAPACITY

|                                                               | Liters |
|---------------------------------------------------------------|--------|
| Usable Capacity of "Standard" Fuel Tank                       | 65.9   |
| Usable Capacity of "Optional" Fuel Tank                       | 0      |
| Stoddard Used For Test (92%-94% of Fuel Tank Usable Capacity) | 61.5   |

#### STEERING COLUMN ADJUSTMENT

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes when moved through its full range of motion. An aluminum plate is placed across the rim of the steering wheel, an inclinometer is placed on the plate and the angle is measured.

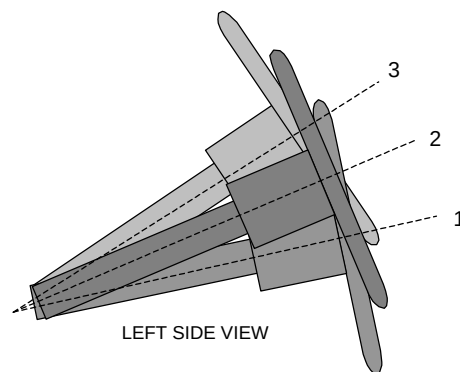

STEERING COLUMN ASSEMBLY

#### STEERING COLUMN POSITION

|                                   | Fore/Aft Position (mm) | Tilt (degrees) | Tilt (detent) |
|-----------------------------------|------------------------|----------------|---------------|
| Lowermost Position No. 1          | NA                     | NA             | 10            |
| Geometric Center Position No. 2 * | NA                     | 22             | 5             |
| Uppermost Position No. 3          | NA                     | 34.5           | 0             |

**DATA SHEET NO. 4****MOVING DEFORMABLE BARRIER (MDB) SUMMARY OF RESULTS**

|               |                     |            |                   |
|---------------|---------------------|------------|-------------------|
| Test Vehicle: | 2007 Buick LaCrosse | NHTSA No.  | G70105            |
| Test Program: | NCAP Side Impact    | Test Date: | February 13, 2007 |

**MDB SPECIFICATIONS**

| Measurement Description                    | Length (mm) |
|--------------------------------------------|-------------|
| Overall Width of Framework Carriage        | 1250        |
| Overall Length Including Honeycomb Face    | 4120        |
| Wheel base of Framework Carriage           | 2590        |
| Tread of Framework Carriage (front & rear) | 1875        |
| C.G. Location aft of Front Axle            | 1104        |

**MDB WEIGHTS**

|        | Units | Front Axle | Rear Axle | Total  |
|--------|-------|------------|-----------|--------|
| Left   | kg    | 409.5      | 281.5     |        |
| Right  | kg    | 372.5      | 299.0     |        |
| Ratio  | %     | 57.4       | 42.6      |        |
| Totals | kg    | 782.0      | 580.5     | 1362.5 |

**MDB SPEED AND IMPACT ANGLE DATA**

| Measured Parameter              | Units | Requirement  | Value |
|---------------------------------|-------|--------------|-------|
| Trap No. 1 Velocity (Primary)   | km/h  | 61.1 to 62.7 | 62.12 |
| Trap No. 2 Velocity (Redundant) | km/h  | 61.1 to 62.7 | 62.12 |

**POST TEST OBSERVATIONS****MDB LEFT EDGE IMPACT POINT DATA**

| Measured Parameter | Units | Requirement | Value          |
|--------------------|-------|-------------|----------------|
| Horizontal Offset  | mm    | +/- 50      | 16 mm rearward |
| Vertical Offset    | mm    | +/-20       | 8 mm below     |

**DATA SHEET NO. 5**  
**POST TEST OBSERVATIONS**

|               |                     |            |                   |
|---------------|---------------------|------------|-------------------|
| Test Vehicle: | 2007 Buick LaCrosse | NHTSA No.  | G70105            |
| Test Program: | NCAP Side Impact    | Test Date: | February 13, 2007 |

**TEST DUMMY INFORMATION AND CONTACT POINTS**

| Description             | Front Seat SID/HIII | Rear Seat SID/HIII  |
|-------------------------|---------------------|---------------------|
| Dummy Type / Serial No. | SID/HIII / 269      | SID/HIII / 270      |
| Head Contact            | Side Curtain Airbag | Side Curtain Airbag |
| Upper Torso Contact     | Door Trim           | Door Trim           |
| Lower Torso Contact     | Door Trim           | Door Trim           |
| Left Knee Contact       | Door Trim           | Door Trim           |
| Right Knee Contact      | Left Knee           | Left Knee           |

**POST TEST DOOR OPENING AND SEAT TRACK INFORMATION**

| Description             | Front                                                          | Rear                                                           |
|-------------------------|----------------------------------------------------------------|----------------------------------------------------------------|
| Locked/Unlocked Doors   | Doors were unlocked                                            | Doors were unlocked                                            |
| Left Side Door Opening  | Door remained closed and latched                               | Door remained closed and latched                               |
| Right Side Door Opening | Door remained closed and latched;<br>Door opened without tools | Door remained closed and latched;<br>Door opened without tools |
| Seat Movement           | 0                                                              | 0                                                              |
| Seat Back Failure       | None                                                           | None                                                           |

**POST TEST STRUCTURAL OBSERVATIONS**

| Critical Areas of Performance | Observations and Conclusions     |
|-------------------------------|----------------------------------|
| Pillar Performance            | No Separation                    |
| Sill Separation               | None                             |
| Windshield Damage             | None                             |
| Window Damage                 | Left Rear Passenger Window Broke |
| Other Notable Effects         | None                             |


**SUPPLEMENTAL RESTRAINT INFORMATION**

| Restraint Type                     | Left Front (Driver) |          | Left Rear (Passenger) |          |
|------------------------------------|---------------------|----------|-----------------------|----------|
|                                    | Installed           | Deployed | Installed             | Deployed |
| Front Airbag                       | Yes                 | No       | NA                    | NA       |
| Side Torso Airbag                  | No                  | No       | NA                    | NA       |
| Side Head/Torso Combination Airbag | NA                  | NA       | NA                    | NA       |
| Curtain Airbag                     | Yes                 | Yes      | Yes                   | Yes      |

## DATA SHEET NO. 6

### VEHICLE PRE-TEST AND POST-TEST MEASUREMENTS

|               |                     |            |                   |
|---------------|---------------------|------------|-------------------|
| Test Vehicle: | 2007 Buick LaCrosse | NHTSA No.  | G70105            |
| Test Program: | NCAP Side Impact    | Test Date: | February 13, 2007 |

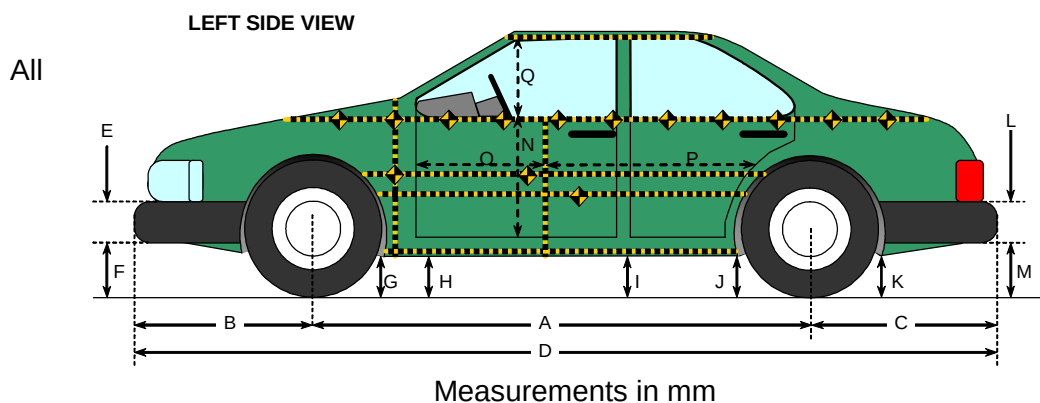

| Code | Measurement Description                | Pre-Test (delivered) | Pre-Test (as tested) | Post-Test (as tested) | Difference |
|------|----------------------------------------|----------------------|----------------------|-----------------------|------------|
| A    | Wheelbase                              | 2814                 | 2815                 | 2758                  | 57         |
| B    | Front Axle to FSOV                     | 1116                 | 1115                 | 1136                  | -21        |
| C    | Rear Axle to RSOV                      | 1103                 | 1103                 | 1126                  | -23        |
| D    | Total Length at Centerline             | 5033                 | 5033                 | 5020                  | 13         |
| E    | Front Bumper Thickness                 | 257                  | 257                  | 259                   | -2         |
| F    | Front Bumper Bottom to Ground          | 278                  | 273                  | 306                   | -33        |
| G    | Sill Height at Front Wheel Well        | 212                  | 190                  | 197                   | -7         |
| H    | Sill Height at Front Door Leading Edge | 213                  | 190                  | 182                   | 8          |
| I    | Sill Height at "B" Pillar              | 220                  | 186                  | 182                   | 4          |
| J1   | Sill Height at Rear Wheel Well         | 214                  | 177                  | 168                   | 9          |
| J2   | Pinch Weld Height at Rear Wheel Well   | 216                  | 178                  | 202                   | -24        |
| K    | Sill Height Aft of Rear Wheel Well     | 286                  | 241                  | 268                   | -27        |
| L    | Rear Bumper Thickness                  | 313                  | 313                  | 321                   | -8         |
| M    | Rear Bumper Bottom to Ground           | 337                  | 291                  | 314                   | -23        |
| N    | Sill Height to Window Bottom Sill      | 691                  | 691                  | 654                   | 37         |
| O    | Front Door Leading Edge to Impact CL   | 822                  | 822                  | 768                   | 54         |
| P    | Rear Door Trailing Edge to Impact CL   | 1214                 | 1214                 | 1128                  | 86         |
| Q    | Front Window Opening                   | 457                  | 457                  | 470                   | -13        |
| R    | Right Side Length                      | 4913                 | 4913                 | 4906                  | 7          |
| S    | Left Side Length                       | 4908                 | 4908                 | 4867                  | 41         |
| T    | Vehicle Width at "B" Post              | 1842                 | 1842                 | 1613                  | 229        |

## DATA SHEET NO. 7


### SID/HIII LONGITUDINAL CLEARANCE DIMENSIONS

Test Vehicle: 2007 Buick LaCrosse

NHTSA No. G70105

Test Program: NCAP Side Impact

Test Date: February 13, 2007

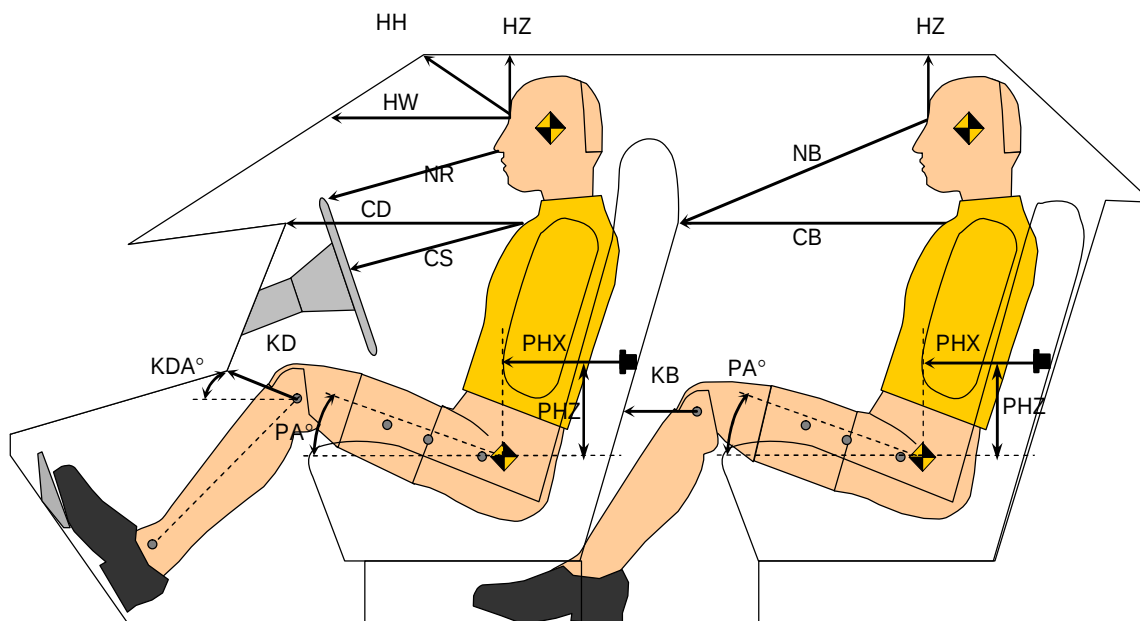


| Driver Code | Pass. Code | Measurement Description        | Driver S/N 269 |          | Passenger S/N 270 |          |
|-------------|------------|--------------------------------|----------------|----------|-------------------|----------|
|             |            |                                | Length(mm)     | Angle(°) | Length(mm)        | Angle(°) |
| HH          |            | Head to Header                 | 356            |          |                   |          |
| HW          |            | Head to Windshield             | 605            |          |                   |          |
| HZ          | HZ         | Head to Roof                   | 150            |          | 135               |          |
| NR          | NB         | Nose to Rim/Nose to Seatback   | 412            |          | 696               |          |
| CD          | CB         | Chest to Dash or Seatback      | 524            |          | 609               |          |
| CS          |            | Chest to Steering Wheel        | 286            |          |                   |          |
| KDL         | KBL        | Left Knee to Dash or Seatback  | 175            | 40       | 230               | 24       |
| KDR         | KBR        | Right Knee to Dash or Seatback | 191            | 35       | 225               | 25       |
| PA          | PA         | Pelvic Angle                   |                | 23.3     |                   | 24.2     |
| PHX         | PHX        | H-Point to Striker (X-Axis)    | 194            |          | 252               |          |
| PHZ         | PHZ        | H-Point to Striker (Z-Axis)    | 115            |          | 288               |          |



## DATA SHEET NO. 8

### SID/HIII LATERAL CLEARANCE DIMENSIONS

|               |                     |            |                   |
|---------------|---------------------|------------|-------------------|
| Test Vehicle: | 2007 Buick LaCrosse | NHTSA No.  | G70105            |
| Test Program: | NCAP Side Impact    | Test Date: | February 13, 2007 |

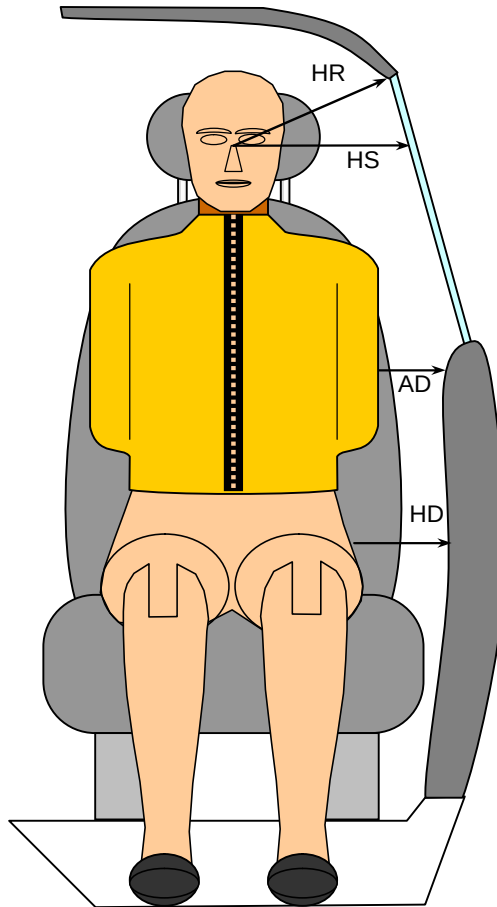


*FRONT VIEW OF DUMMY*

| Code            | Measurement Description          | Units | Driver<br>S/N 269 | Passenger<br>S/N 270 |
|-----------------|----------------------------------|-------|-------------------|----------------------|
| HR              | Head to Side Header              | mm    | 170               | 155                  |
| HS              | Head to Side Window              | mm    | 331               | 210                  |
| AD <sub>1</sub> | Arm to Door (at upper rib level) | mm    | 125               | 138                  |
| AD <sub>2</sub> | Arm to Door (at lower rib level) | mm    | 120               | 139                  |
| HD              | H-Point to Door                  | mm    | 154               | 170                  |

**DATA SHEET NO. 9**  
**VEHICLE SIDE MEASUREMENTS**

|               |                     |            |                   |
|---------------|---------------------|------------|-------------------|
| Test Vehicle: | 2007 Buick LaCrosse | NHTSA No.  | G70105            |
| Test Program: | NCAP Side Impact    | Test Date: | February 13, 2007 |

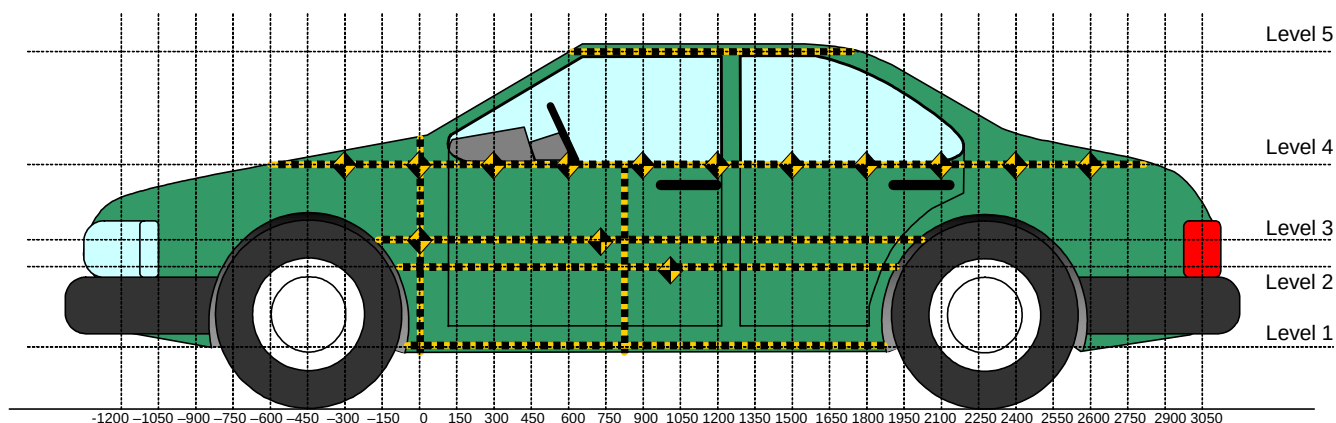

All Measurements Shown in mm

**LEFT SIDE VIEW**

Measurements are taken with vehicle in the as tested condition.  
Measurements along the vertical 750 mm.  
All measurements below in mm.

| Level | Measurement Description | Maximum Exterior Static Crush | Height Above Ground | Distance From Impact |
|-------|-------------------------|-------------------------------|---------------------|----------------------|
| 1     | Sill Top                | 146                           | 857                 | 1050                 |
| 2     | Occupant H-Point        | 292                           | 603                 | 1050                 |
| 3     | Mid Door                | 274                           | 444                 | 1650                 |
| 4     | Window Sill             | 234                           | 191                 | 1650                 |
| 5     | Window                  | 99                            | 291                 | 1350                 |
|       | Maximum Penetration     | 292                           |                     |                      |

# DATA SHEET NO. 10


## VEHICLE EXTERIOR CRUSH PROFILES

Test Vehicle: 2007 Buick LaCrosse

NHTSA No. G70105

Test Program: NCAP Side Impact

Test Date: February 13, 2007

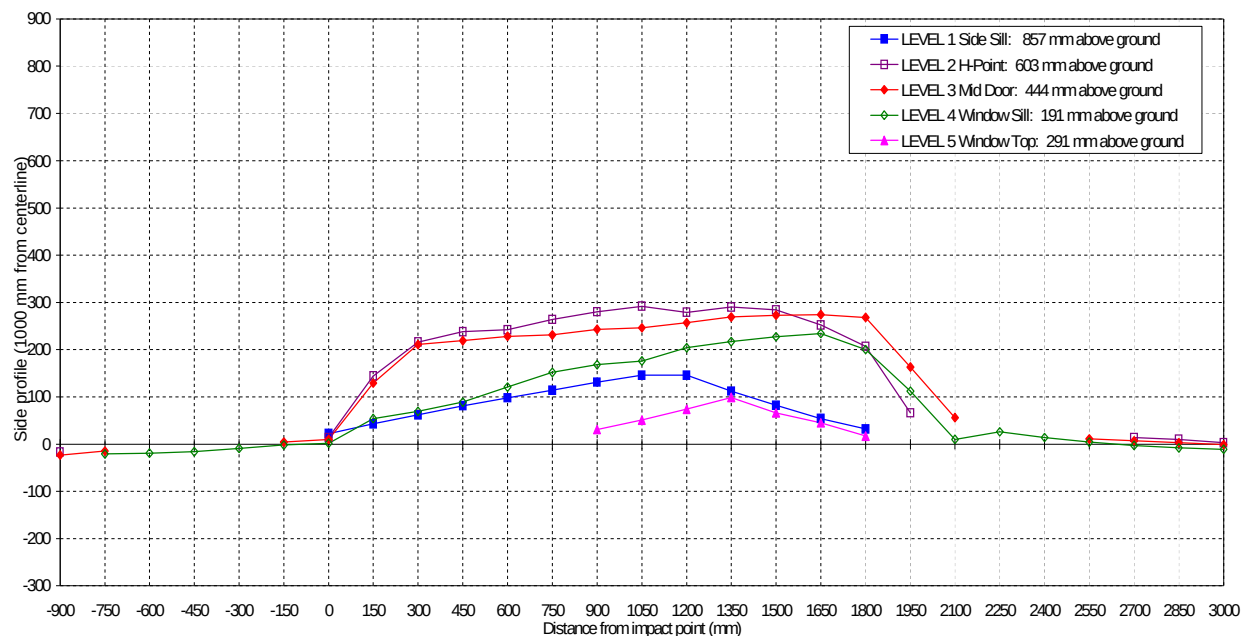


NOTE: All dimensions are in millimeters with a tolerance of  $\pm 3$  mm

|                           |             |       | DISTANCE IN MILLIMETERS (mm) FROM IMPACT POINT |      |      |      |      |      |     |     |     |     |     |     |     |      |      |      |      |      |      |      |      |      |      |      |      |      |      |     |
|---------------------------|-------------|-------|------------------------------------------------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-----|
| LEVEL                     | HEIGHT (mm) |       | -900                                           | -750 | -600 | -450 | -300 | -150 | 0   | 150 | 300 | 450 | 600 | 750 | 900 | 1050 | 1200 | 1350 | 1500 | 1650 | 1800 | 1950 | 2100 | 2250 | 2400 | 2550 | 2700 | 2850 | 3000 |     |
| LEVEL 1<br>SIDE<br>SILL   | 857         | PRE   | -                                              | -    | -    | -    | -    | -    | 144 | 147 | 148 | 148 | 148 | 148 | 147 | 146  | 146  | 145  | 142  | 140  | 137  | -    | -    | -    | -    | -    | -    | -    | -    | -   |
|                           |             | POST  | -                                              | -    | -    | -    | -    | -    | 166 | 190 | 210 | 229 | 246 | 262 | 278 | 292  | 292  | 257  | 224  | 194  | 169  | -    | -    | -    | -    | -    | -    | -    | -    | -   |
|                           |             | CRUSH | N/A                                            | N/A  | N/A  | N/A  | N/A  | N/A  | 22  | 43  | 62  | 81  | 98  | 114 | 131 | 146  | 146  | 112  | 82   | 54   | 32   | N/A  | N/A  | N/A  | N/A  | N/A  | N/A  | N/A  | N/A  | N/A |
| LEVEL 2<br>H<br>POINT     | 603         | PRE   | 113                                            | -    | -    | -    | -    | -    | 97  | 99  | 99  | 98  | 98  | 97  | 97  | 96   | 97   | 97   | 97   | 96   | 94   | 94   | -    | -    | -    | -    | 110  | 133  | 162  |     |
|                           |             | POST  | 96                                             | -    | -    | -    | -    | -    | 111 | 243 | 315 | 336 | 340 | 361 | 377 | 388  | 376  | 387  | 381  | 348  | 301  | 160  | -    | -    | -    | -    | 124  | 143  | 165  |     |
|                           |             | CRUSH | -17                                            | N/A  | N/A  | N/A  | N/A  | N/A  | 14  | 144 | 216 | 238 | 242 | 264 | 280 | 292  | 279  | 290  | 284  | 252  | 207  | 66   | N/A  | N/A  | N/A  | N/A  | 14   | 10   | 3    |     |
| LEVEL 3<br>MID<br>DOOR    | 444         | PRE   | 122                                            | 97   | -    | -    | -    | 84   | 89  | 93  | 94  | 94  | 93  | 92  | 92  | 93   | 93   | 93   | 93   | 92   | 89   | 88   | 84   | -    | -    | 91   | 112  | 138  | 170  |     |
|                           |             | POST  | 99                                             | 82   | -    | -    | -    | 88   | 99  | 222 | 305 | 313 | 321 | 323 | 335 | 339  | 350  | 362  | 366  | 366  | 357  | 251  | 140  | -    | -    | 102  | 119  | 141  | 169  |     |
|                           |             | CRUSH | -23                                            | -15  | N/A  | N/A  | N/A  | 4    | 10  | 129 | 211 | 219 | 228 | 231 | 243 | 246  | 257  | 269  | 273  | 274  | 268  | 163  | 56   | N/A  | N/A  | 11   | 7    | 3    | -1   |     |
| LEVEL 4<br>WINDOW<br>SILL | 191         | PRE   | -                                              | 264  | 191  | 171  | 155  | 148  | 146 | 143 | 142 | 140 | 139 | 137 | 137 | 135  | 136  | 136  | 138  | 137  | 137  | 132  | 130  | 131  | 138  | 150  | 169  | 193  | 222  |     |
|                           |             | POST  | -                                              | 243  | 172  | 155  | 146  | 146  | 148 | 197 | 211 | 229 | 260 | 289 | 305 | 311  | 340  | 353  | 365  | 371  | 337  | 244  | 140  | 157  | 152  | 154  | 166  | 185  | 211  |     |
|                           |             | CRUSH | N/A                                            | -21  | -19  | -16  | -9   | -2   | 2   | 54  | 69  | 89  | 121 | 152 | 168 | 176  | 204  | 217  | 227  | 234  | 200  | 112  | 10   | 26   | 14   | 4    | -3   | -8   | -11  |     |
| LEVEL 5<br>WINDOW<br>TOP  | 291         | PRE   | -                                              | -    | -    | -    | -    | -    | -   | -   | -   | -   | -   | -   | 419 | 413  | 412  | 414  | 420  | 428  | 453  | -    | -    | -    | -    | -    | -    | -    | -    |     |
|                           |             | POST  | -                                              | -    | -    | -    | -    | -    | -   | -   | -   | -   | -   | -   | -   | 450  | 464  | 486  | 513  | 486  | 473  | 470  | -    | -    | -    | -    | -    | -    | -    |     |
|                           |             | CRUSH | N/A                                            | N/A  | N/A  | N/A  | N/A  | N/A  | N/A | N/A | N/A | N/A | N/A | N/A | N/A | 31   | 51   | 74   | 99   | 66   | 45   | 17   | N/A  | N/A  | N/A  | N/A  | N/A  | N/A  | N/A  | N/A |

## DATA SHEET NO. 11

### VEHICLE DAMAGE PROFILE DISTANCES

|               |                     |            |                   |
|---------------|---------------------|------------|-------------------|
| Test Vehicle: | 2007 Buick LaCrosse | NHTSA No.  | G70105            |
| Test Program: | NCAP Side Impact    | Test Date: | February 13, 2007 |

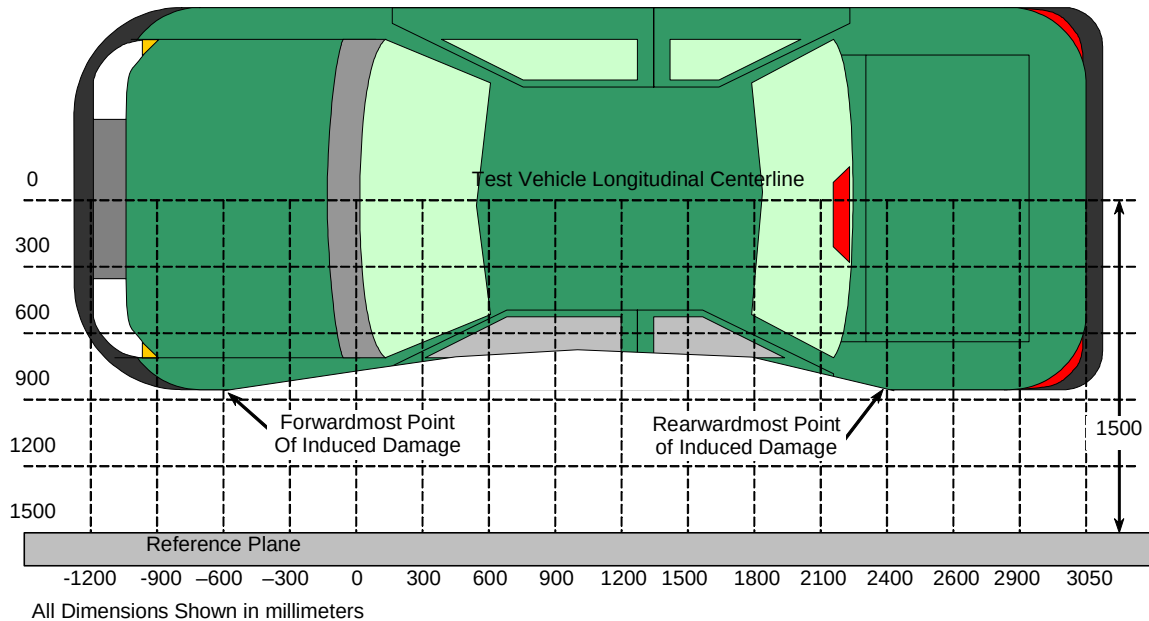

**TOP VIEW**

### DAMAGE PROFILE DISTANCES

| DPD    | Distance from Impact Point in mm | Level | Pre-Test (mm) | Post-Test (mm) | Max Static Crush (mm) |
|--------|----------------------------------|-------|---------------|----------------|-----------------------|
| 1 (LR) | 2700                             | 603   | 110           | 124            | 14                    |
| 2      | 2130                             | 191   | 130           | 143            | 13                    |
| 3      | 1560                             | 444   | 93            | 366            | 273                   |
| 4      | 990                              | 603   | 96            | 384            | 288                   |
| 5      | 420                              | 603   | 98            | 332            | 234                   |
| 6 (LF) | -150                             | 444   | 84            | 88             | 4                     |

Reference plane is parallel to test vehicle longitudinal centerline.  
 Given dimensions = Reference plane to vehicle body.

## DATA SHEET NO. 12


### DEFORMABLE BARRIER HONEYCOMB FACE STATIC CRUSH

Test Vehicle: 2007 Buick LaCrosse

NHTSA No. G70105

Test Program: NCAP Side Impact

Test Date: February 13, 2007

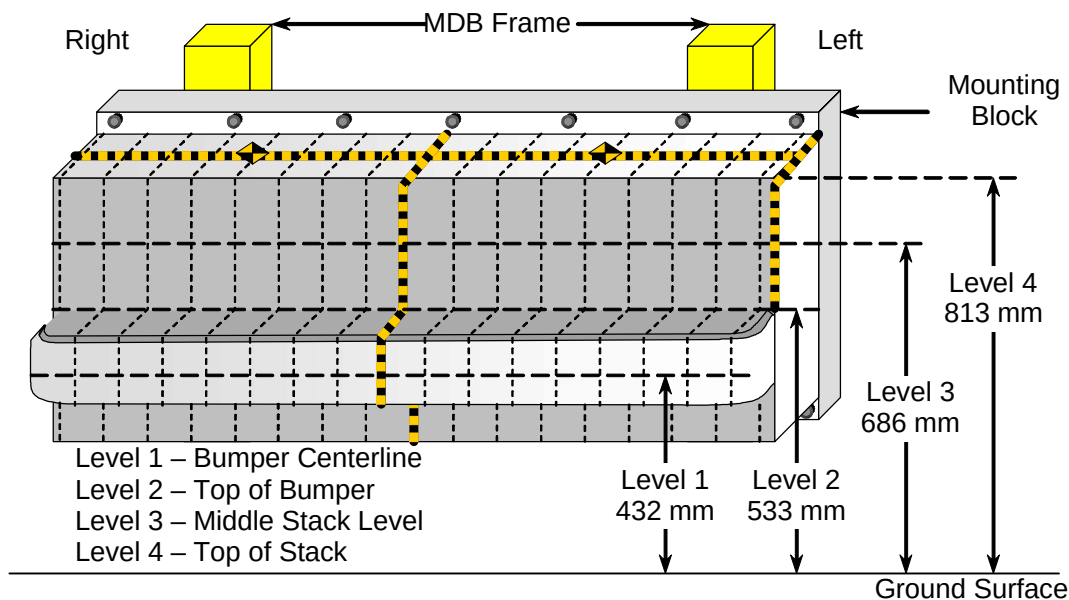

NOTE: All dimensions are in millimeters with a tolerance of  $\pm 3$  mm

|                          |                    |       | NOTE: All dimensions are in millimeters with a tolerance of ±3 mm |     |     |     |     |     |     |     |     |     |                              |     |     |     |     |     |     |  |
|--------------------------|--------------------|-------|-------------------------------------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------------------------------|-----|-----|-----|-----|-----|-----|--|
|                          |                    |       | DISTANCE RIGHT OF CENTER (mm)                                     |     |     |     |     |     |     |     |     |     | DISTANCE LEFT OF CENTER (mm) |     |     |     |     |     |     |  |
| LEVEL                    | HEIGHT AT CL (mm)* |       | 800                                                               | 700 | 600 | 500 | 400 | 300 | 200 | 100 | 0   | 100 | 200                          | 300 | 400 | 500 | 600 | 700 | 800 |  |
| LEVEL 4<br>TOP<br>STACK  | 813                | PRE   | 619                                                               | 619 | 619 | 619 | 619 | 619 | 619 | 619 | 619 | 619 | 619                          | 619 | 619 | 619 | 619 | 619 | 619 |  |
|                          |                    | POST  | 624                                                               | 618 | 608 | 609 | 618 | 624 | 640 | 649 | 643 | 643 | 637                          | 642 | 655 | 676 | 691 | 709 | 744 |  |
|                          |                    | CRUSH | 5                                                                 | -1  | -11 | -10 | -1  | 5   | 21  | 30  | 24  | 24  | 18                           | 23  | 36  | 57  | 72  | 90  | 125 |  |
| LEVEL 3<br>MID<br>LEVEL  | 686                | PRE   | 619                                                               | 619 | 619 | 619 | 619 | 619 | 619 | 619 | 619 | 619 | 619                          | 619 | 619 | 619 | 619 | 619 | 619 |  |
|                          |                    | POST  | 645                                                               | 626 | 623 | 619 | 620 | 622 | 636 | 639 | 629 | 624 | 620                          | 621 | 630 | 641 | 651 | 669 | 727 |  |
|                          |                    | CRUSH | 26                                                                | 7   | 4   | 0   | 1   | 3   | 17  | 20  | 10  | 5   | 1                            | 2   | 11  | 22  | 32  | 50  | 108 |  |
| LEVEL 2<br>TOP<br>BUMPER | 533                | PRE   | 619                                                               | 619 | 619 | 619 | 619 | 619 | 619 | 619 | 619 | 619 | 619                          | 619 | 619 | 619 | 619 | 619 | 619 |  |
|                          |                    | POST  | 728                                                               | 716 | 704 | 690 | 678 | 673 | 666 | 669 | 667 | 666 | 666                          | 669 | 673 | 678 | 695 | 714 | 738 |  |
|                          |                    | CRUSH | 109                                                               | 97  | 85  | 71  | 59  | 54  | 47  | 50  | 48  | 47  | 47                           | 50  | 54  | 59  | 76  | 95  | 119 |  |
| LEVEL 1<br>MID<br>BUMPER | 432                | PRE   | 535                                                               | 519 | 518 | 518 | 518 | 518 | 518 | 518 | 518 | 518 | 518                          | 518 | 518 | 518 | 518 | 519 | 535 |  |
|                          |                    | POST  | 724                                                               | 698 | 664 | 633 | 615 | 620 | 617 | 602 | 603 | 607 | 604                          | 600 | 602 | 610 | 625 | 644 | 679 |  |
|                          |                    | CRUSH | 189                                                               | 179 | 146 | 115 | 97  | 102 | 99  | 84  | 85  | 89  | 86                           | 82  | 84  | 92  | 107 | 125 | 144 |  |

\*Heights measured above ground level.

# DATA SHEET NO. 13

## VEHICLE ACCELEROMETER LOCATIONS


Test Vehicle: 2007 Buick LaCrosse

NHTSA No. G70105

Test Program: NCAP Side Impact

Test Date: February 13, 2007

LEFT SIDE VIEW

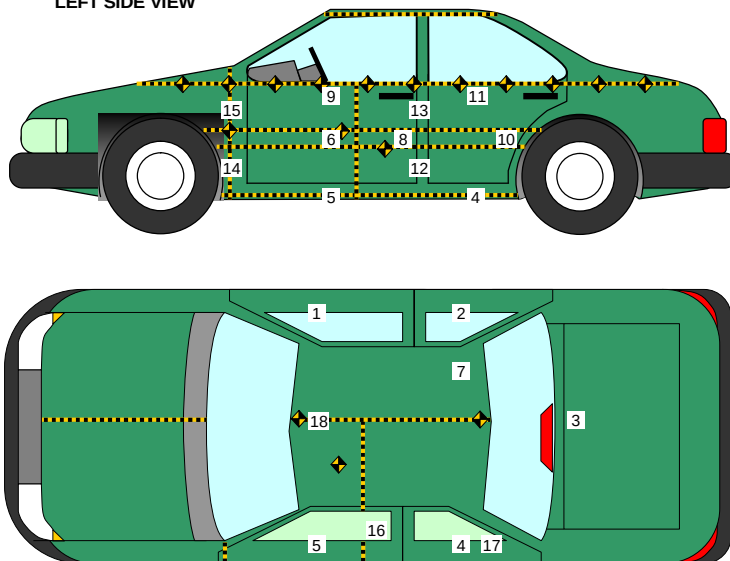

| Loc. No. | Accelerometer Location       | Measurements (mm) |      |     |
|----------|------------------------------|-------------------|------|-----|
|          |                              | X                 | Y    | Z   |
| 1        | Right Sill at Front Seat     | 3124              | 706  | 799 |
| 2        | Right Sill at Rear Seat      | 2324              | 707  | 802 |
| 3        | Rear Floorpan Above Axle     | 1406              | -24  | 601 |
| 4        | Left Sill at Rear Door       | 3117              | -693 | 810 |
| 5        | Left Sill at Front Door      | 2330              | -699 | 843 |
| 6        | Left Front Door C/L **       | -                 | -    | -   |
| 7        | Rear Occupant Compartment    | 2308              | 485  | 876 |
| 8        | Left Front Door Mid-Rear**   | -                 | -    | -   |
| 9        | Left Front Door Upper C/L ** | -                 | -    | -   |
| 10       | Left Rear Door Mid-Rear**    | -                 | -    | -   |
| 11       | Left Rear Door Upper C/L **  | -                 | -    | -   |
| 12       | Left Lower B-Post            | 2373              | -689 | 606 |
| 13       | Left Middle B-Post           | 2300              | -686 | 169 |
| 14       | Left Lower A-Post            | 3388              | -657 | 706 |
| 15       | Left Middle A-Post           | 3251              | -684 | 103 |
| 16       | Front Seat Track             | 2475              | -572 | 840 |
| 17       | Rear Seat Track or Structure | 1343              | -607 | 559 |
| 18       | Vehicle CG                   | 2658              | 6    | 639 |

Reference Points X - Test Vehicle Rear Bumper (+ forward)

Y - Test Vehicle Centerline (+ to right)


Z - Ground Plane (+ down)

\*\* Accelerometer was not requested by the COTR.

## DATA SHEET NO. 14

### MDB ACCELEROMETER LOCATIONS

|               |                     |            |                   |
|---------------|---------------------|------------|-------------------|
| Test Vehicle: | 2007 Buick LaCrosse | NHTSA No.  | G70105            |
| Test Program: | NCAP Side Impact    | Test Date: | February 13, 2007 |

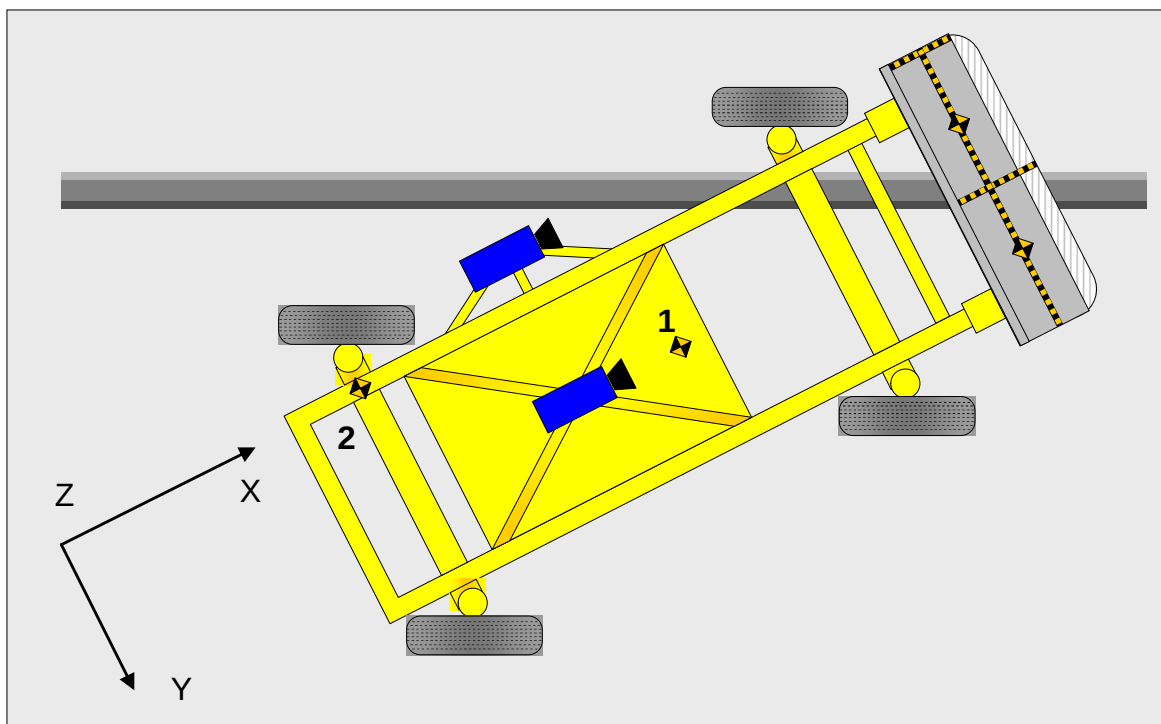

| Loc. No. | Accelerometer Location | Measurements (mm) |      |      |
|----------|------------------------|-------------------|------|------|
|          |                        | X                 | Y    | Z    |
| 1        | MDB CG                 | 1859              | 0    | -330 |
| 2        | MDB Rear               | 386               | -660 | -660 |

Reference Points    X - MDB Rear Bumper (+ forward)  
                              Y - MDB Centerline (+ to right)  
                              Z - Ground Plane (+ down)

**DATA SHEET NO. 15****VEHICLE STRUCTURAL MEASUREMENTS**

|               |                     |            |                   |
|---------------|---------------------|------------|-------------------|
| Test Vehicle: | 2007 Buick LaCrosse | NHTSA No.  | G70105            |
| Test Program: | NCAP Side Impact    | Test Date: | February 13, 2007 |

|    | Elements                              | Pre-Test (mm) |
|----|---------------------------------------|---------------|
| 1  | Total Length                          | 5033          |
| 2  | Total Width                           | 1842          |
| 3  | Bumper Top Height                     | 516           |
| 4  | Bumper Bottom Height                  | 422           |
| 5  | Longitudinal Member Top Height        | 534           |
| 6  | Distance between Longitudinal Members | 1174          |
| 7  | Longitudinal Member Width             | 97            |
| 8  | Engine Top Height                     | 872           |
| 9  | Engine Bottom Height                  | 249           |
| 10 | Engine and gearbox width              | -630          |
| 11 | Front bumper-engine distance          | 647           |
| 12 | Front shock absorber fixing height    | 886           |
| 13 | Bonnet leading edge height            | 738           |
| 14 | Front shock absorber fixing width     | 1188          |
| 15 | Front bumper – front axle distance    | 1116          |
| 16 | Front axle – a pillar distance        | 479           |
| 17 | A-pillar – B-pillar distance          | 1081          |
| 18 | B-Pillar – rear axle distance         | 1255          |
| 19 | B-pillar – C-pillar distance          | 1048          |
| 20 | Roof sill bottom height               | 1313          |
| 21 | Roof sill top height                  | 1404          |
| 22 | Floor sill bottom height              | 205           |
| 23 | Floor sill top height                 | 345           |



## DATA SHEET NO. 16


### HIGH SPEED CAMERA LOCATIONS AND DATA

Test Vehicle: 2007 Buick LaCrosse

NHTSA No. G70105

Test Program: NCAP Side Impact

Test Date: February 13, 2007

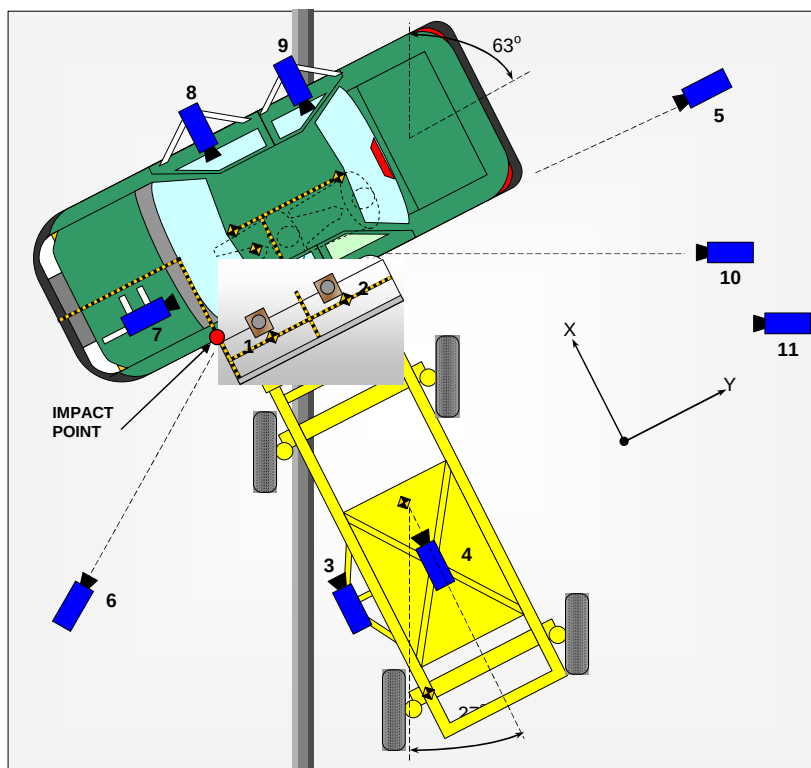

| No. | Camera View                           | Location (mm) |       |       | Angle (deg) | Lens (mm) | Film Speed (fps) |
|-----|---------------------------------------|---------------|-------|-------|-------------|-----------|------------------|
|     |                                       | X             | Y     | Z     |             |           |                  |
| 1   | Overhead Overall                      | 72            | 812   | -4880 | -90         | 8         | 500              |
| 2   | Overhead Close-up                     | 195           | 855   | -4880 | -90         | 28        | 1000             |
| 3   | MDB Onboard, Impact Point Close-up    | -1470         | 0     | -847  | 0           | 13        | 500              |
| 4   | MDB Onboard, Centerline of Impact     | -1140         | 838   | -1587 | -17         | 7.5       | 500              |
| 5   | Right Side, Ground Level, Overall     | 0             | 11313 | -1053 | -2.7        | 50        | 1000             |
| 6   | Left Side, Ground Level, Overall      | -2010         | -1701 | -895  | -4.9        | 28        | 1000             |
| 7   | Vehicle Onboard Front SID/HIII, Front | 511           | -395  | -1291 | -12.0       | 25        | 1000             |
| 8   | Vehicle Onboard Front SID/HIII, Side  | 1565          | 680   | -1035 | -5.8        | 12.5      | 1000             |
| 9   | Vehicle Onboard Rear SID/HIII, Side   | 1565          | 1543  | -1064 | -6.8        | 12.5      | 1000             |
| 10  | Secondary Impact Point                | 4783          | 3123  | -965  | -1.2        | 25        | 500              |
| 11  | Real Time Coverage                    |               |       |       |             |           | 30               |

Reference Points  
 X - Impact Line  
 Y - MDB Left Edge Impact Point  
 Z - Ground Plane

**DATA SHEET NO. 17**  
**SUMMARY OF FMVSS 301 DATA**


|               |                     |            |                   |
|---------------|---------------------|------------|-------------------|
| Test Vehicle: | 2007 Buick LaCrosse | NHTSA No.  | G70105            |
| Test Program: | NCAP Side Impact    | Test Date: | February 13, 2007 |

**FUEL SYSTEM INTEGRITY POST IMPACT DATA**


| Time Interval                       | FMVSS 301 Maximum Allowable Spillage | Spillage (g) |
|-------------------------------------|--------------------------------------|--------------|
| Impact Until Motion Ceases          | 28 g                                 | 0            |
| First Five Minutes Following Impact | 142 g                                | 0            |
| Next 25 Minutes                     | 28 g / 1 minute                      | 0            |

|                      |      |
|----------------------|------|
| Spillage Location(s) | None |
|----------------------|------|


**STATIC ROLLOVER DATA**




0/360



90



REAR VIEW



270

| Rollover Stage | Rotation Time (spec. 1 -3 min) |         |    |         | FMVSS 301 Hold Time |         | Total Time |         |   |         | Next Whole Minute Interval |         |
|----------------|--------------------------------|---------|----|---------|---------------------|---------|------------|---------|---|---------|----------------------------|---------|
| 0° - 90°       | 1                              | minutes | 05 | seconds | 5                   | minutes | 6          | minutes | 5 | seconds | 7                          | minutes |
| 90° - 180°     | 1                              | minutes | 00 | seconds | 5                   | minutes | 6          | minutes | 0 | seconds | 7                          | minutes |
| 180°-270°      | 1                              | minutes | 03 | seconds | 5                   | minutes | 6          | minutes | 3 | seconds | 7                          | minutes |
| 270°-360°      | 1                              | minutes | 02 | seconds | 5                   | minutes | 6          | minutes | 2 | seconds | 7                          | minutes |

| Rollover Stage                                   | Spillage (g)                        |                      |                      |                                    |
|--------------------------------------------------|-------------------------------------|----------------------|----------------------|------------------------------------|
|                                                  | First 5 min. from onset of rotation | 6 <sup>th</sup> min. | 7 <sup>th</sup> min. | 8 <sup>th</sup> min. (if required) |
| 0° - 90°                                         | 0                                   | 0                    | 0                    | 0                                  |
| 90° - 180°                                       | 0                                   | 0                    | 0                    | 0                                  |
| 180°-270°                                        | 0                                   | 0                    | 0                    | 0                                  |
| 270°-360°                                        | 0                                   | 0                    | 0                    | 0                                  |
| FMVSS 301 Maximum Allowable (for each 90° stage) | 142                                 | 28                   | 28                   | 28                                 |

| Rollover Stage | Spillage Location(s) |
|----------------|----------------------|
| 0° - 90°       | None                 |
| 90° - 180°     | None                 |
| 180°-270°      | None                 |
| 270°-360°      | None                 |

**APPENDIX A**  
**PHOTOGRAPHS**

## TABLE OF PHOTOGRAPHS

| FIGURE | TITLE                                               | PAGE |
|--------|-----------------------------------------------------|------|
| A-1    | As Received Left Front $\frac{3}{4}$ View           | A-4  |
| A-2    | As Received Right Rear $\frac{3}{4}$ View           | A-4  |
| A-3    | Vehicle Certification Label                         | A-5  |
| A-4    | Vehicle Tire Placard Label                          | A-5  |
| A-5    | Pre-Test Front View                                 | A-6  |
| A-6    | Post-Test Front View                                | A-6  |
| A-7    | Pre-Test Left Front $\frac{3}{4}$ View              | A-7  |
| A-8    | Post-Test Left Front $\frac{3}{4}$ View             | A-7  |
| A-9    | Pre-Test Left Side View                             | A-8  |
| A-10   | Post-Test Left Side View                            | A-8  |
| A-11   | Pre-Test Left Rear $\frac{3}{4}$ View               | A-9  |
| A-12   | Post-Test Left Rear $\frac{3}{4}$ View              | A-9  |
| A-13   | Pre-Test Rear View                                  | A-10 |
| A-14   | Post-Test Rear View                                 | A-10 |
| A-15   | Pre-Test Right Rear $\frac{3}{4}$ View              | A-11 |
| A-16   | Post-Test Right Rear $\frac{3}{4}$ View             | A-11 |
| A-17   | Pre-Test Right Side View                            | A-12 |
| A-18   | Post-Test Right Side View                           | A-12 |
| A-19   | Pre-Test Right Front $\frac{3}{4}$ View             | A-13 |
| A-20   | Post-Test Right Front $\frac{3}{4}$ View            | A-13 |
| A-21   | Pre-Test Frontal View of MDB Impactor Face          | A-14 |
| A-22   | Post-Test Frontal View of MDB Impactor Face         | A-14 |
| A-23   | Pre-Test Left Side View of MDB Impactor Face        | A-15 |
| A-24   | Post-Test Left Side View of MDB Impactor Face       | A-15 |
| A-25   | Pre-Test Right Side View of MDB Impactor Face       | A-16 |
| A-26   | Post-Test Right Side View of MDB Impactor Face      | A-16 |
| A-27   | Pre-Test Top View of MDB Impactor Face              | A-17 |
| A-28   | Post-Test Top View of MDB Impactor Face             | A-17 |
| A-29   | Pre-Test Left Side View of Aligned MDB and Vehicle  | A-18 |
| A-30   | Pre-Test Right Side View of Aligned MDB and Vehicle | A-18 |
| A-31   | Pre-Test Overhead View of Aligned MDB and Vehicle   | A-19 |
| A-32   | Post-Test Overhead View of MDB and Vehicle          | A-19 |
| A-33   | Pre-Test Close-Up View of Impact Point Target       | A-20 |
| A-34   | Post-Test Close-Up View of Impact Point Target      | A-20 |

**TABLE OF PHOTOGRAPHS (continued)**

| FIGURE | TITLE                                                      | PAGE |
|--------|------------------------------------------------------------|------|
| A-35   | Pre-Test Right Occupant Compartment View of Driver         | A-21 |
| A-36   | Post-Test Right Occupant Compartment View of Driver        | A-21 |
| A-37   | Pre-Test Right Occupant Compartment View of Passenger      | A-22 |
| A-38   | Post-Test Right Occupant Compartment View of Passenger     | A-22 |
| A-39   | Pre-Test Left Occupant Compartment View of Driver          | A-23 |
| A-40   | Post-Test Left Occupant Compartment View of Driver         | A-23 |
| A-41   | Pre-Test Left Occupant Compartment View of Passenger       | A-24 |
| A-42   | Post-Test Left Occupant Compartment View of Passenger      | A-24 |
| A-43   | Pre-Test Left Front Interior Trim                          | A-25 |
| A-44   | Post-Test Left Front Interior Trim                         | A-25 |
| A-45   | Pre-Test Left Rear Interior Trim                           | A-26 |
| A-46   | Post-Test Left Rear Interior Trim                          | A-26 |
| A-47   | Pre-Test Left Front $\frac{3}{4}$ View of Left Side Doors  | A-27 |
| A-48   | Post-Test Left Front $\frac{3}{4}$ View of Left Side Doors | A-27 |
| A-49   | Pre-Test Left Rear $\frac{3}{4}$ View of Left Side Doors   | A-28 |
| A-50   | Post-Test Left Rear $\frac{3}{4}$ View of Left Side Doors  | A-28 |
| A-51   | Rollover 90 Degrees                                        | A-29 |
| A-52   | Rollover 180 Degrees                                       | A-29 |
| A-53   | Rollover 270 Degrees                                       | A-30 |
| A-54   | Rollover 360 Degrees                                       | A-30 |
| A-55   | Impact Photo                                               | A-31 |



**Figure A-1: As Received Left Front  $\frac{3}{4}$  View**



**Figure A-2: As Received Right Rear  $\frac{3}{4}$  View**



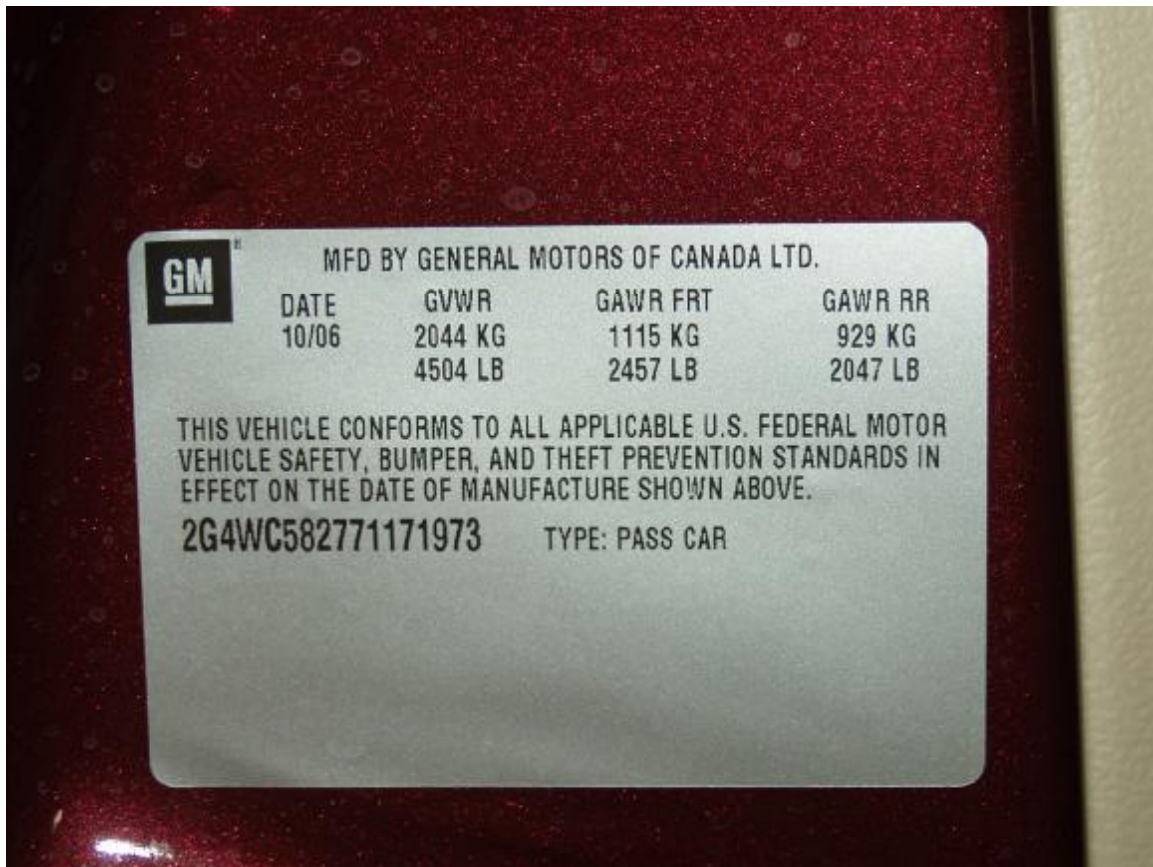


Figure A-3: Vehicle Certification Label

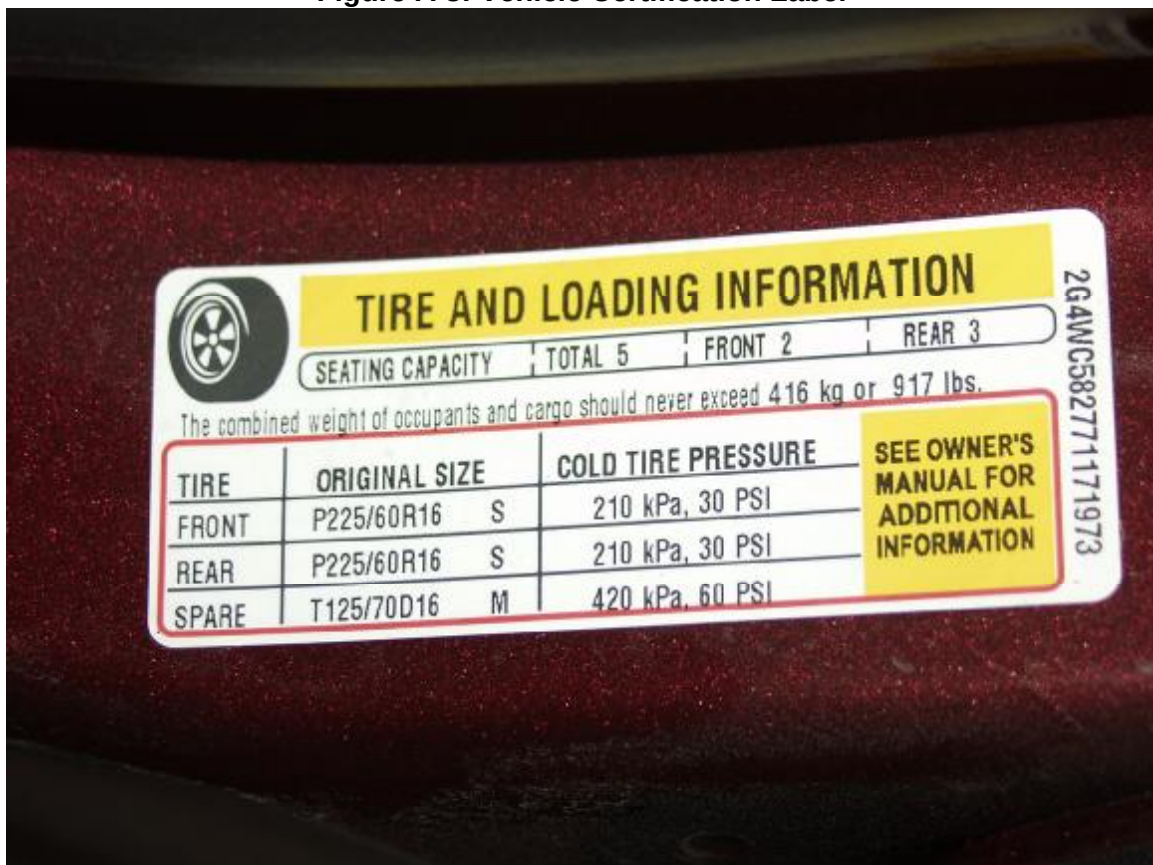


Figure A-4: Vehicle Tire Placard Label



Figure A-5: Pre-Test Front View



Figure A-6: Post-Test Front View







**Figure A-9: Pre-Test Left Side View**



**Figure A-10: Post-Test Left Side View**





**Figure A-11: Pre-Test Left Rear  $\frac{3}{4}$  View**



**Figure A-12: Post-Test Left Rear  $\frac{3}{4}$  View**



**Figure A-13: Pre-Test Rear View**



**Figure A-14: Post-Test Rear View**





**Figure A-15: Pre-Test Right Rear  $\frac{3}{4}$  View**



**Figure A-16: Post-Test Right Rear  $\frac{3}{4}$  View**



**Figure A-17: Pre-Test Right Side View**



**Figure A-18: Post-Test Right Side View**





**Figure A-19: Pre-Test Right Front  $\frac{3}{4}$  View**



**Figure A-20: Post-Test Right Front  $\frac{3}{4}$  View**



**Figure A-21: Pre-Test Frontal View of MDB Impactor Face**



**Figure A-22: Post-Test Frontal View of MDB Impactor Face**





**Figure A-23: Pre-Test Left Side View of MDB Impactor Face**



**Figure A-24: Post-Test Left Side View of MDB Impactor Face**



**Figure A-25: Pre-Test Right Side View of MDB Impactor Face**



**Figure A-26: Post-Test Right Side View of MDB Impactor Face**





Figure A-27: Pre-Test Top View of MDB Impactor Face



Figure A-28: Post-Test Top View of MDB Impactor Face



Figure A-29: Pre-Test Left Side View of Aligned MDB and Vehicle



Figure A-30: Pre-Test Right Side View of Aligned MDB and Vehicle





**Figure A-31: Pre-Test Overhead View of Aligned MDB and Vehicle**



**Figure A-32: Post-Test Overhead View of MDB and Vehicle**



**Figure A-33: Pre-Test Close-Up View of Impact Point Target**



**Figure A-34: Post-Test Close-Up View of Impact Point Target**





**Figure A-35: Pre-Test Right Occupant Compartment View of Driver**



**Figure A-36: Post-Test Right Occupant Compartment View of Driver**



**Figure A-37: Pre-Test Right Occupant Compartment View of Passenger**



**Figure A-38: Post-Test Right Occupant Compartment View of Passenger**





**Figure A-39: Pre-Test Left Occupant Compartment View of Driver**



**Figure A-40: Post-Test Left Occupant Compartment View of Driver**



**Figure A-41: Pre-Test Left Occupant Compartment View of Passenger**



**Figure A-42: Post-Test Left Occupant Compartment View of Passenger**





**Figure A-43: Pre-Test Left Front Interior Trim**



**Figure A-44: Post-Test Left Front Interior Trim**





**Figure A-45: Pre-Test Left Rear Interior Trim**



**Figure A-46: Post-Test Left Rear Interior Trim**



**Figure A-47: Pre-Test Left Front  $\frac{3}{4}$  View of Left Side Doors**



**Figure A-48: Post-Test Left Front  $\frac{3}{4}$  View of Left Side Doors**

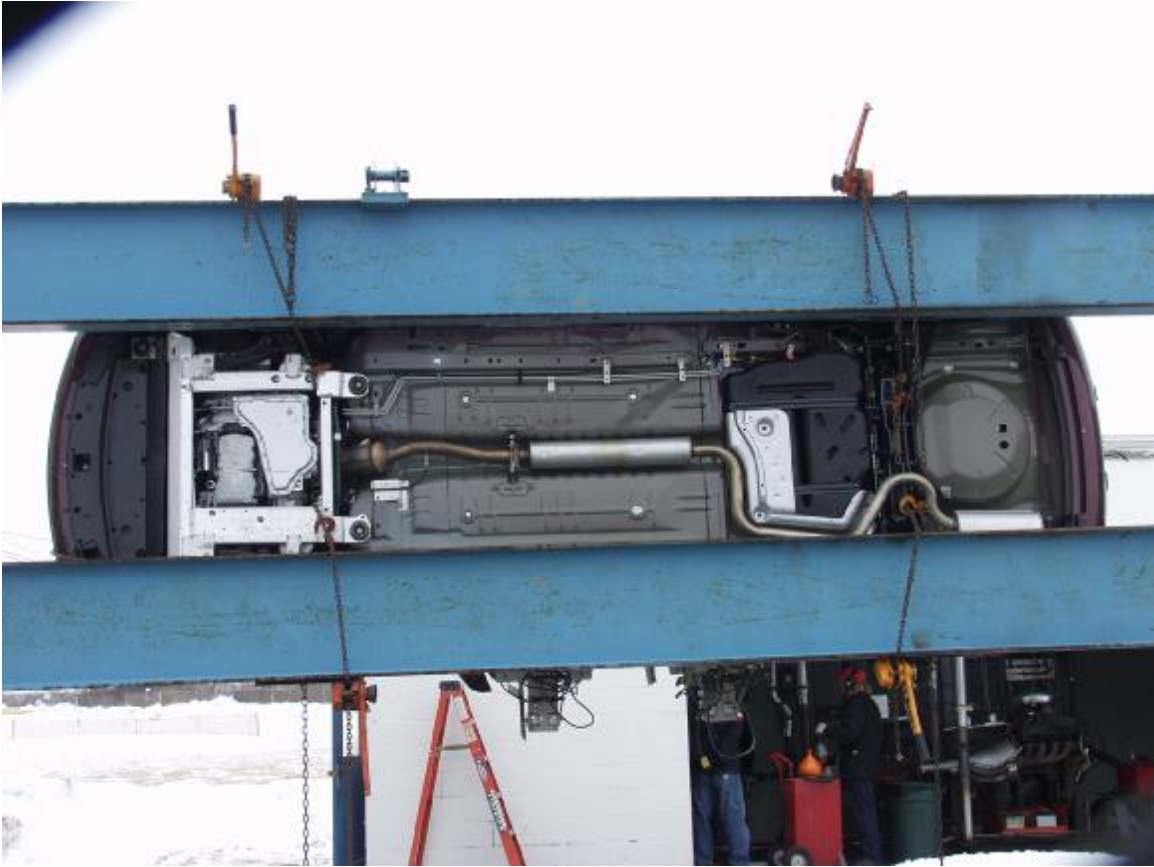




**Figure A-49: Pre-Test Left Rear  $\frac{3}{4}$  View of Left Side Doors**



**Figure A-50: Post-Test Left Rear  $\frac{3}{4}$  View of Left Side Doors**



**Figure A-51: Rollover 90 Degrees**



**Figure A-52: Rollover 180 Degrees**





**Figure A-53: Rollover 270 Degrees**



**Figure A-54: Rollover 360 Degrees**



**Figure A-55: Impact Photo**

**APPENDIX B**  
**SID/HIII, VEHICLE AND MDB RESPONSE DATA**  
**(SAE sign convention)**

### DATA CHANNEL FILTER CLASS SUMMARY

| Data Type                | SAE Filter Class |
|--------------------------|------------------|
| Dummy Head Accelerations | CFC 1000         |
| Rib Accelerations        | FIR 100          |
| Spine Accelerations      | FIR 100          |
| Pelvis Accelerations     | FIR 100          |

### DATA CHANNEL TITLE KEY

| Prefix                                            | Suffix                         |
|---------------------------------------------------|--------------------------------|
| V1 = Vehicle 1 (Moving Barrier)                   | Ax = Acceleration, X-direction |
| V2 = Vehicle 2 (Test Vehicle)                     | Ay = Acceleration, Y-direction |
| P1 = Left Front Seating Position (Driver)         | Az = Acceleration, Z-direction |
| P4 = Left Second Row Seating Position (Passenger) | Fx = Force, X-direction        |
| A1-A18 = Accelerometer Location Number            | Fy = Force, Y-direction        |
|                                                   | Fz = Force, Z-direction        |
|                                                   | Mx = Moment about X            |
|                                                   | My = Moment about Y            |
|                                                   | Mz = Moment about Z            |



# TABLE OF DATA PLOTS

| PLOT | PLOT NAME[UNITS, CHANNEL FILTER CLASS] | PAGE |
|------|----------------------------------------|------|
| 1    | V2P1 Head Ax [g, CFC_1000]             | B-5  |
| 2    | V2P1 Head Ay [g, CFC_1000]             | B-5  |
| 3    | V2P1 Head Az [g, CFC_1000]             | B-5  |
| 4    | V2P1 Head Ar [g, CFC_1000]             | B-5  |
| 5    | V1P1 Upper Rib Ay [g, FIR_100]         | B-6  |
| 6    | V1P1 Lower Rib Ay [g, FIR_100]         | B-6  |
| 7    | V1P1 Lower Spine Ay [g, FIR_100]       | B-6  |
| 8    | V1P1 Pelvic Ay [g, FIR_100]            | B-6  |
| 9    | V2P4 Head Ax [g, CFC_1000]             | B-7  |
| 10   | V2P4 Head Ay [g, CFC_1000]             | B-7  |
| 11   | V2P4 Head Az [g, CFC_1000]             | B-7  |
| 12   | V2P4 Head Ar [g, CFC_1000]             | B-7  |
| 13   | V1P4 Upper Rib Ay [g, FIR_100]         | B-8  |
| 14   | V1P4 Lower Rib Ay [g, FIR_100]         | B-8  |
| 15   | V1P4 Lower Spine Ay [g, FIR_100]       | B-8  |
| 16   | V1P4 Pelvic Ay [g, FIR_100]            | B-8  |

The following dummy, vehicle and load cell response data can be found in the research and development section of the NHTSA website at: [www.nhtsa.dot.gov](http://www.nhtsa.dot.gov)





|                               |                                   |
|-------------------------------|-----------------------------------|
| V2P1 Head Ax                  | V2A1 Right Front Sill Ax          |
| V2P1 Head Ay                  | V2A1 Right Front Sill Ay          |
| V2P1 Head Az                  | V2A1 Right Front Sill Az          |
| V2P1 Upper Neck Fx            | V2A2 Right Rear Sill Ax           |
| V2P1 Upper Neck Fy            | V2A2 Right Rear Sill Ay           |
| V2P1 Upper Neck Fz            | V2A2 Right Rear Sill Az           |
| V2P1 Upper Neck Mx            | V2A3 Rear Floorpan Ax             |
| V2P1 Upper Neck My            | V2A3 Rear Floorpan Ay             |
| V2P1 Upper Neck Mz            | V2A3 Rear Floorpan Az             |
| V2P1 Upper Rib Ay             | V2A4 Left Rear Sill Ay            |
| V2P1 Upper Rib Redundant Ay   | V2A5 Left Front Sill Ay           |
| V2P1 Lower Rib Ay             | V2A6 Left Front Door C/L Ay       |
| V2P1 Lower Rib Redundant Ay   | V2A7 Right Rear Compartment Ay    |
| V2P1 Lower Spine Ay           | V2A8 Left Front Door Midrear Ay   |
| V2P1 Lower Spine Redundant Ay | V2A9 Left Front Door Upper C/L Ay |
| V2P1 Pelvic Ay                | V2A10 Left Rear Door Midrear Ay   |
| V2P1 Pelvic Redundant Ay      | V2A11 Left Rear Door Upper C/L Ay |
| V2P4 Head Ax                  | V2A12 Left Lower B Post Ay        |
| V2P4 Head Ay                  | V2A13 Left Mid B Post Ay          |
| V2P4 Head Az                  | V2A14 Left Lower A Post Ay        |
| V2P4 Upper Neck Fx            | V2A15 Left Mid A Post Ay          |
| V2P4 Upper Neck Fy            | V2A16 Front Seat Track Ay         |
| V2P4 Upper Neck Fz            | V2A17 Rear Seat Track Ay          |
| V2P4 Upper Neck Mx            | V2A18 Target CG Ax                |
| V2P4 Upper Neck My            | V2A18 Target CG Ay                |
| V2P4 Upper Neck Mz            | V2A18 Target CG Az                |
| V2P4 Upper Rib Ay             | V1 Moving Barrier CG Ax           |
| V2P4 Upper Rib Redundant Ay   | V1 Moving Barrier CG Ay           |
| V2P4 Lower Rib Ay             | V1 Moving Barrier CG Az           |
| V2P4 Lower Rib Redundant Ay   | V1 Moving Barrier Left Rail Ax    |
| V2P4 Lower Spine Ay           | V1 Moving Barrier Left Rail Ay    |
| V2P4 Lower Spine Redundant Ay |                                   |
| V2P4 Pelvic Ay                |                                   |
| V2P4 Pelvic Redundant Ay      |                                   |

## TEST NOTES

The following data anomalies occurred:  
NONE





# SNCAP OPT. Test 2 2007 Buick Lacrosse

## G70105 - February 13, 2007

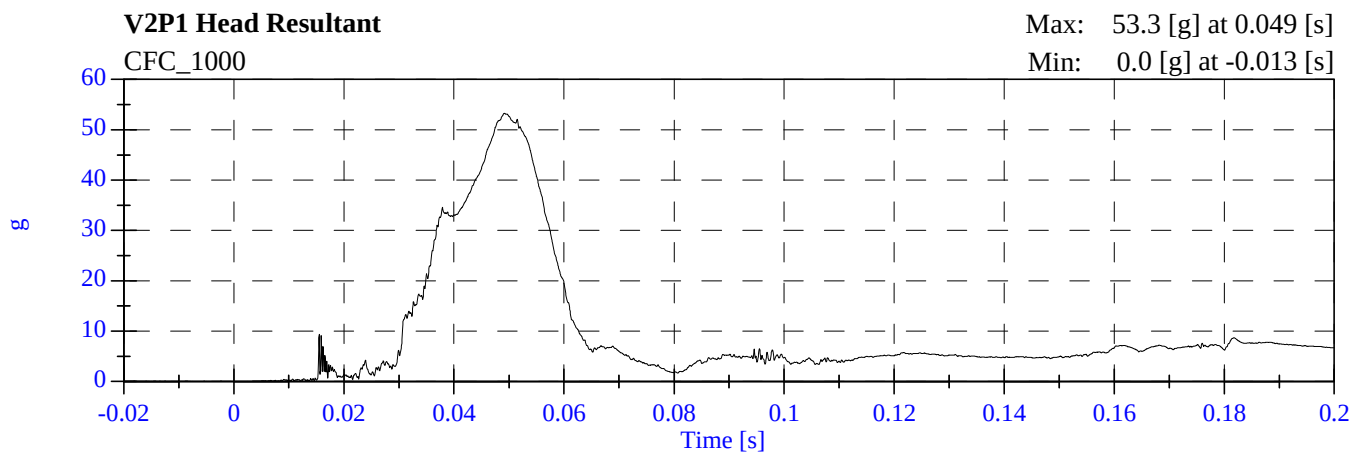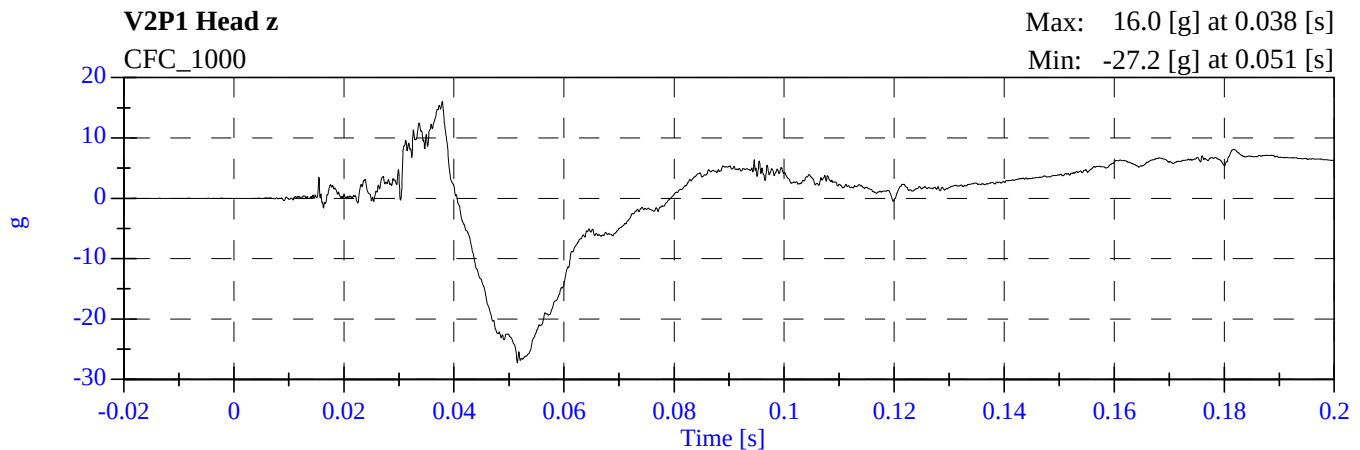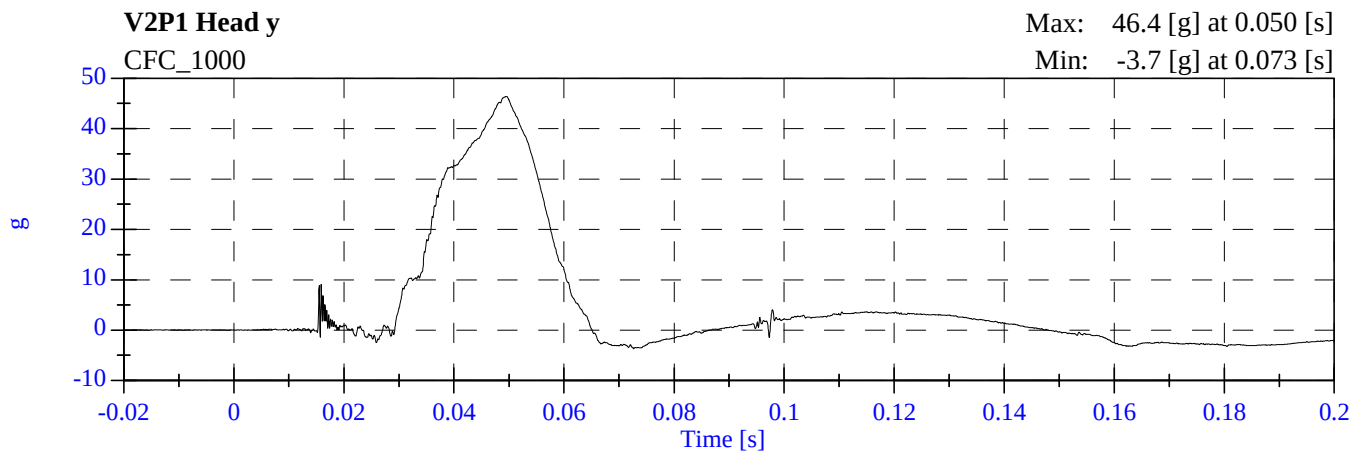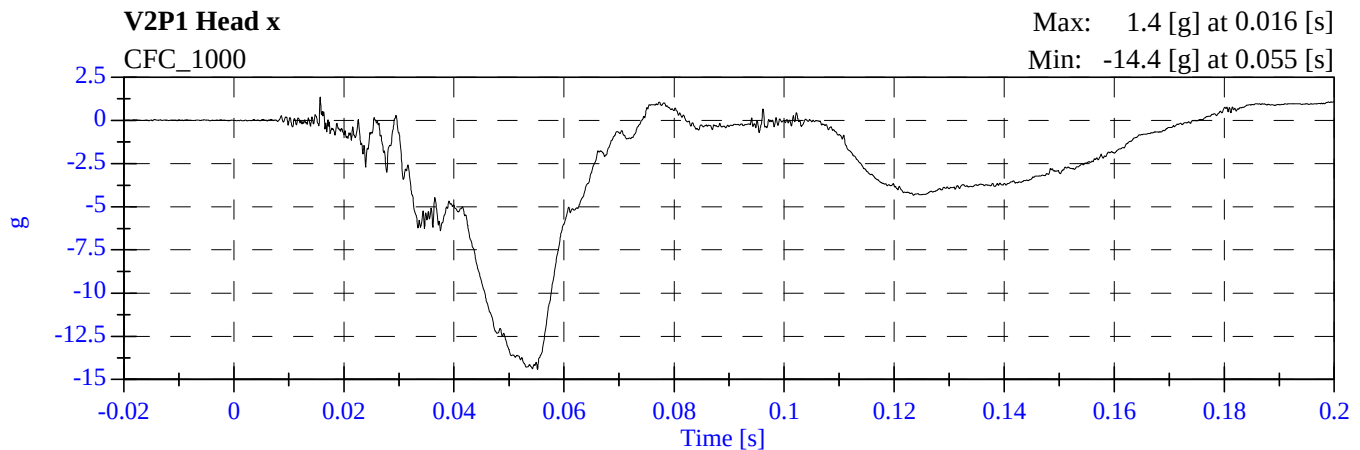

# SNCAP OPT. Test 2 2007 Buick Lacrosse





## G70105 - February 13, 2007

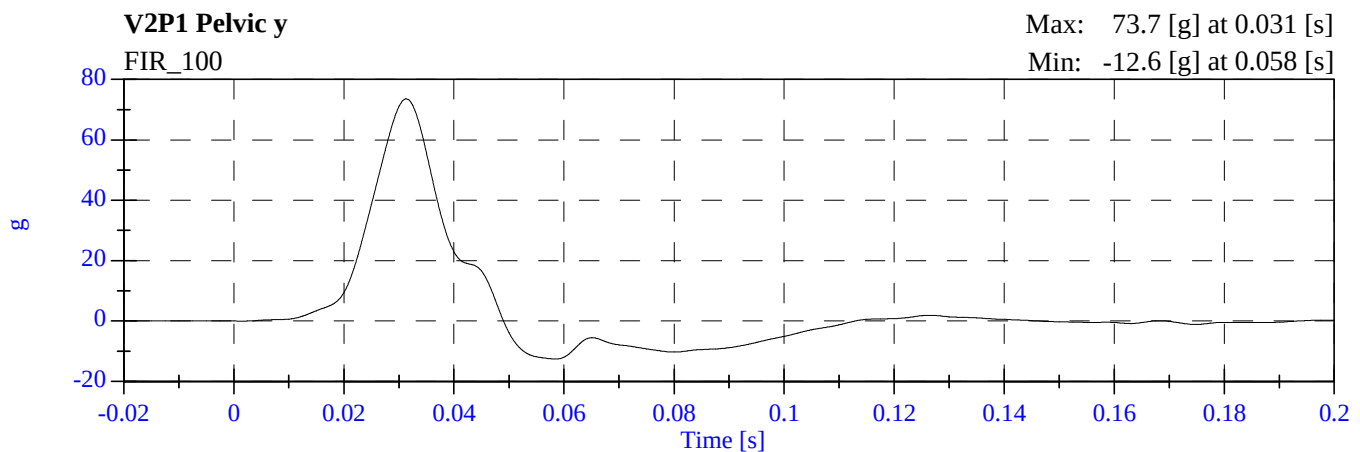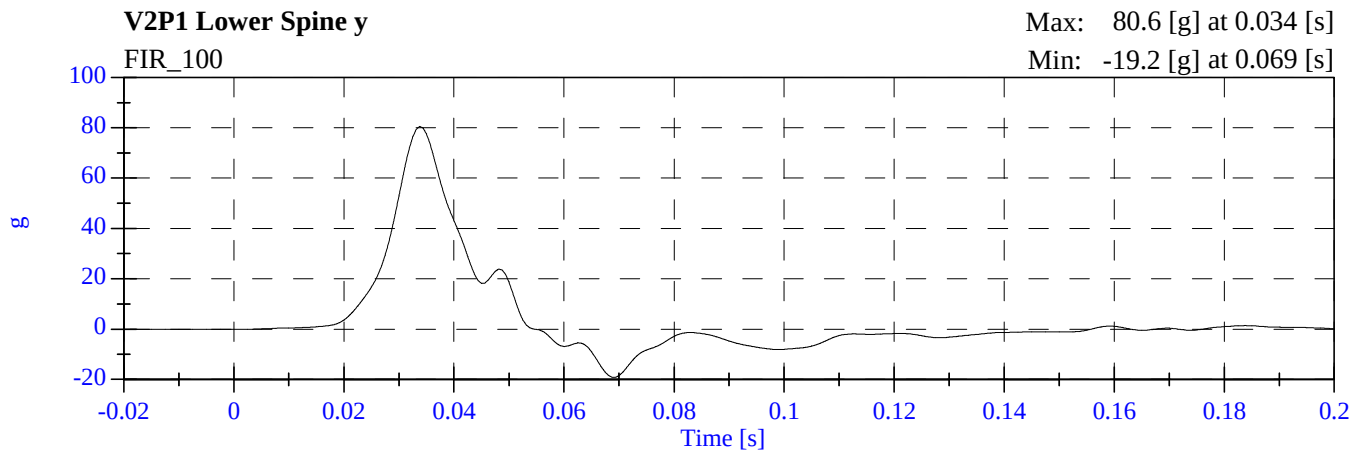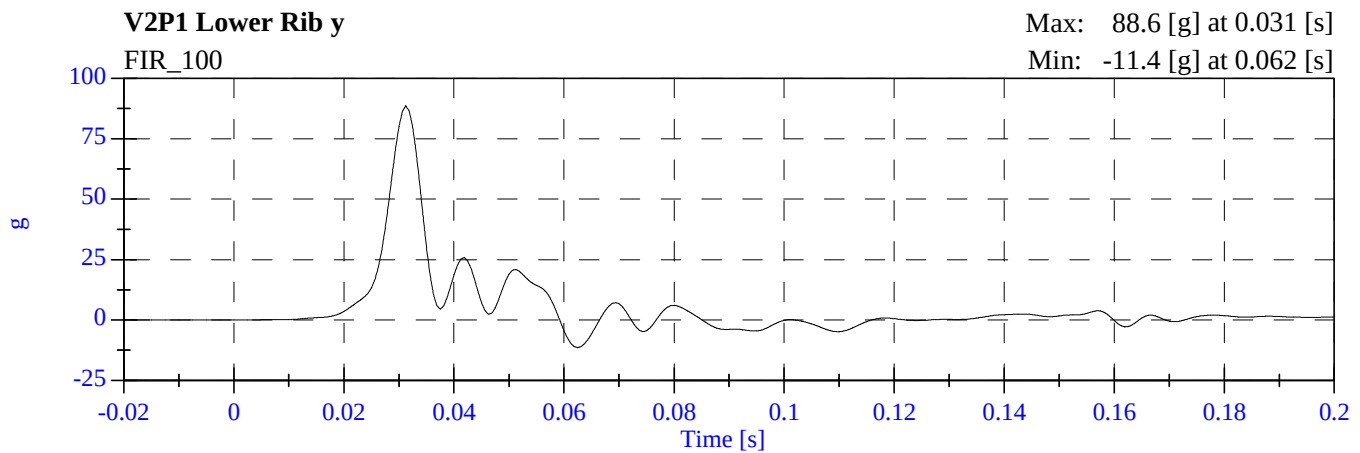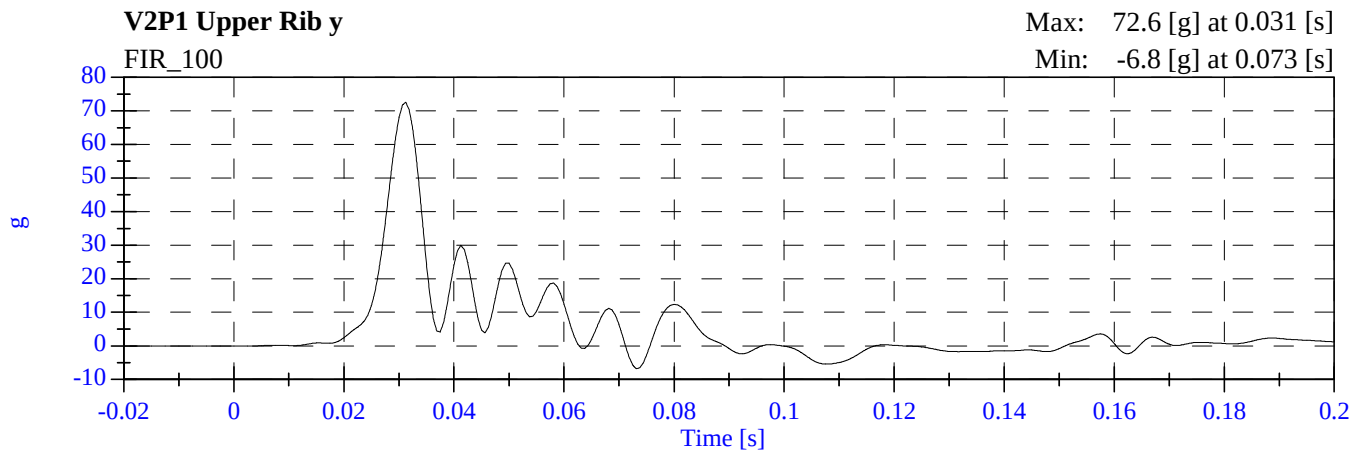







# SNCAP OPT. Test 2 2007 Buick Lacrosse

## G70105 - February 13, 2007

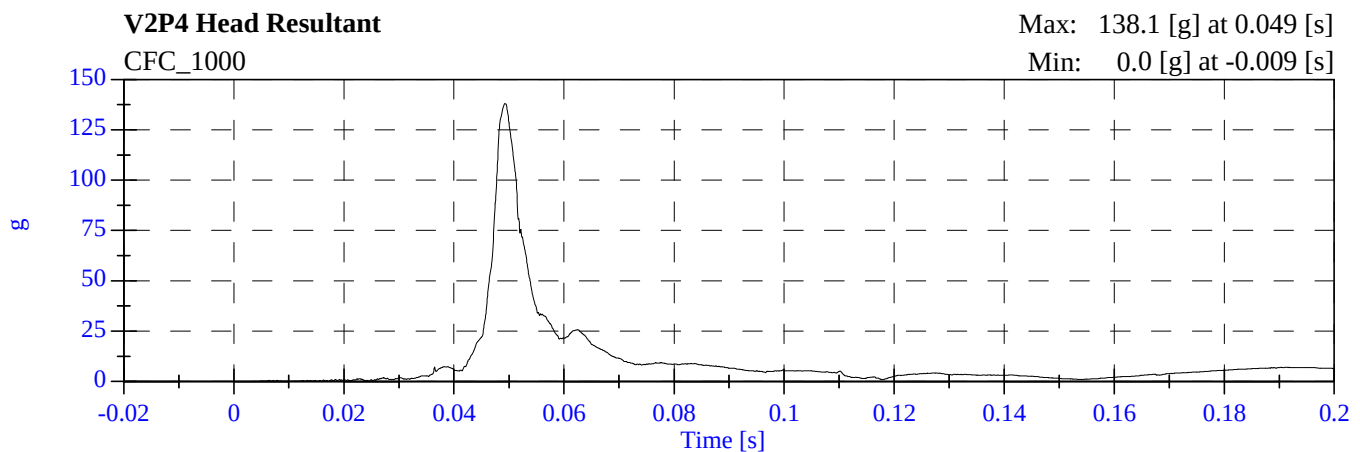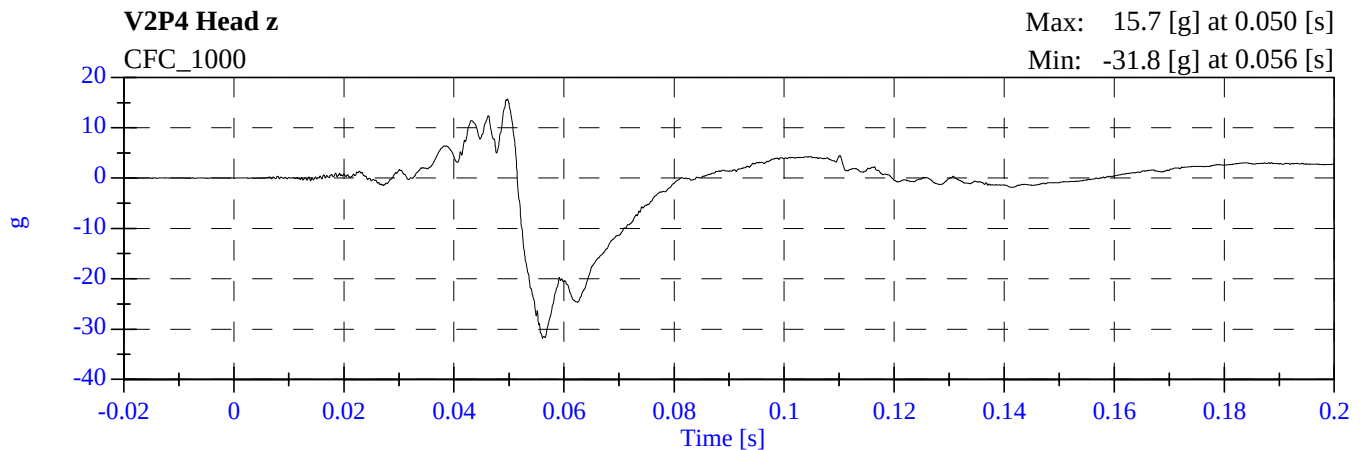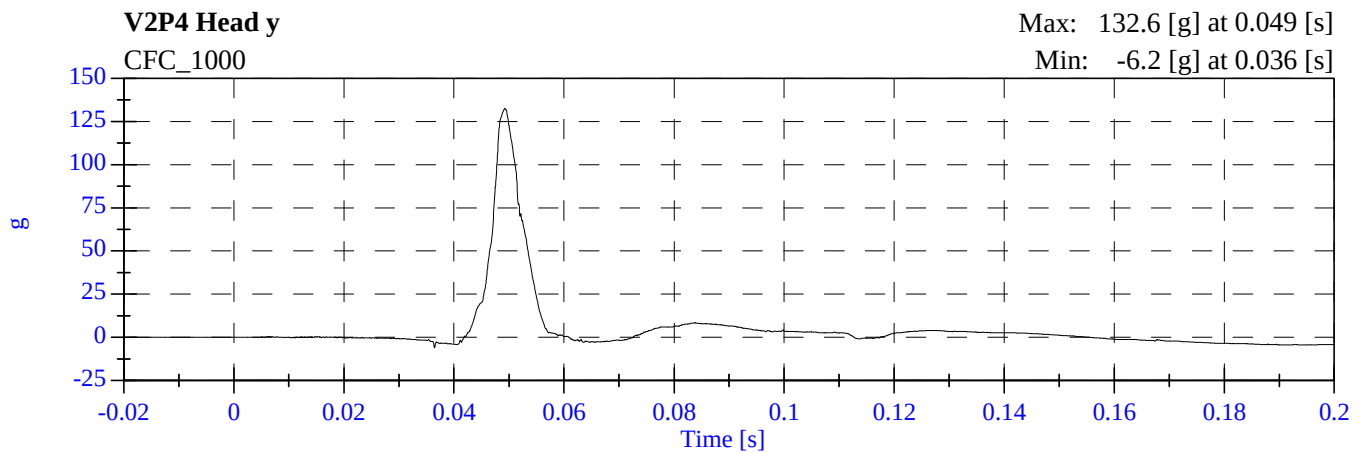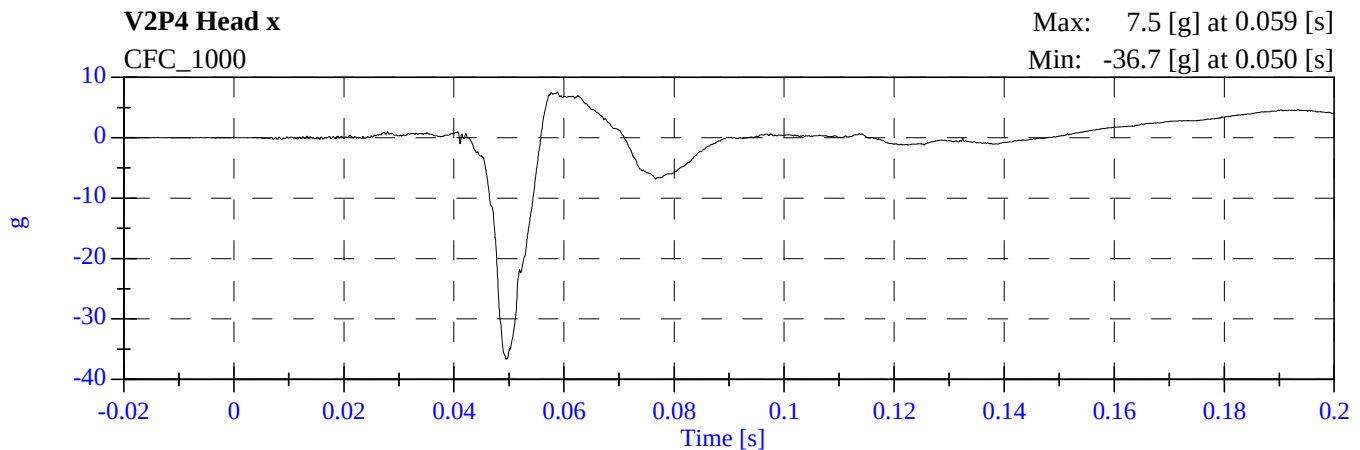

# SNCAP OPT. Test 2 2007 Buick Lacrosse

## G70105 - February 13, 2007

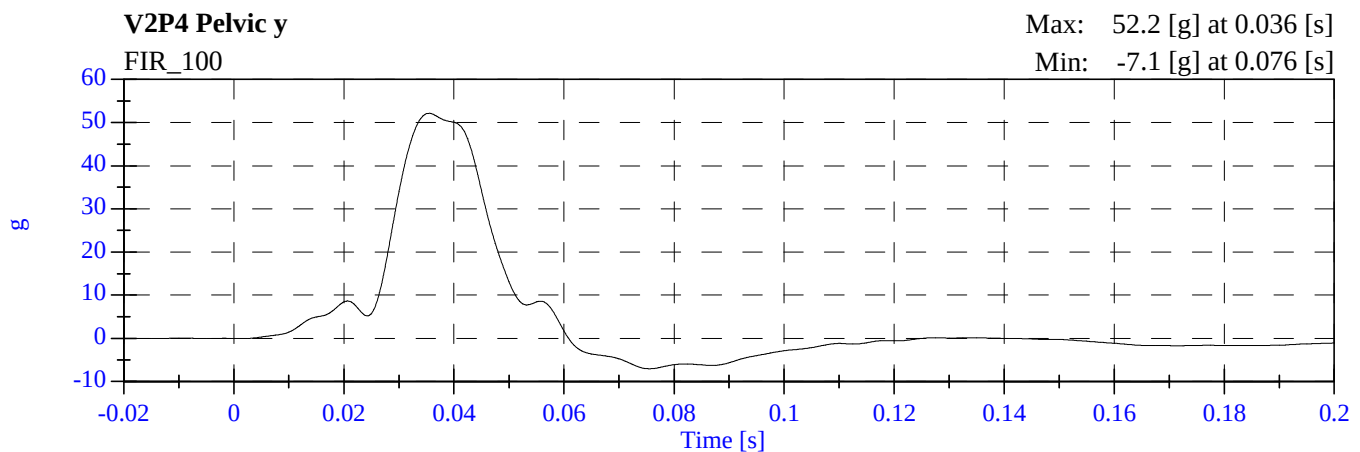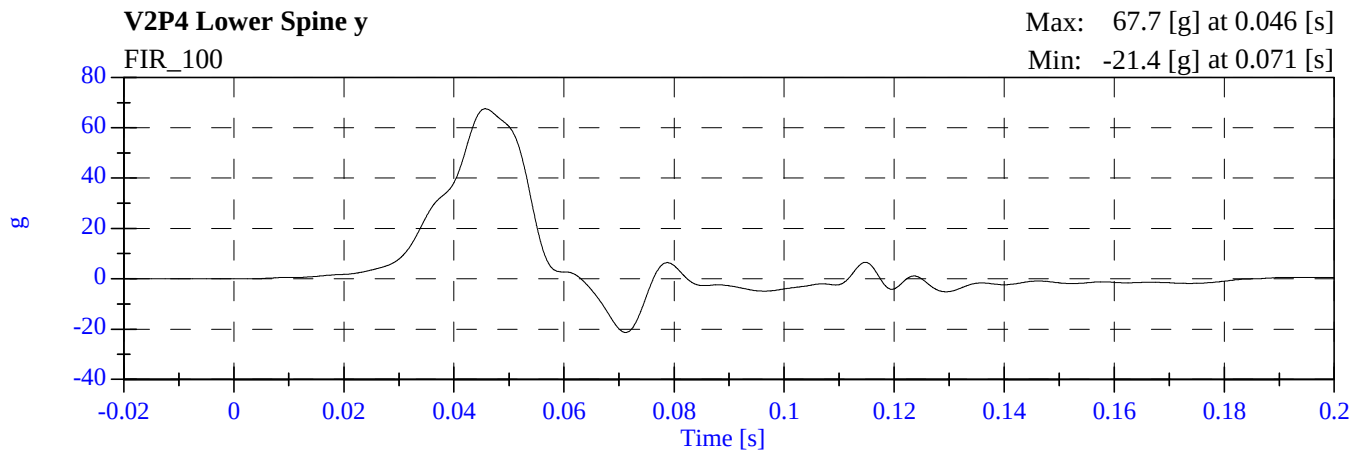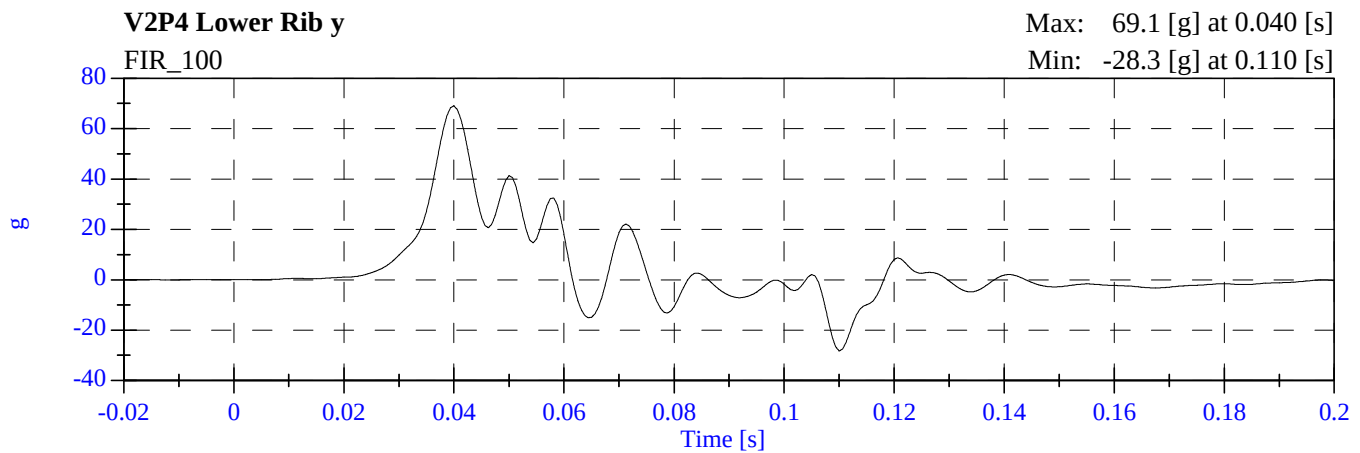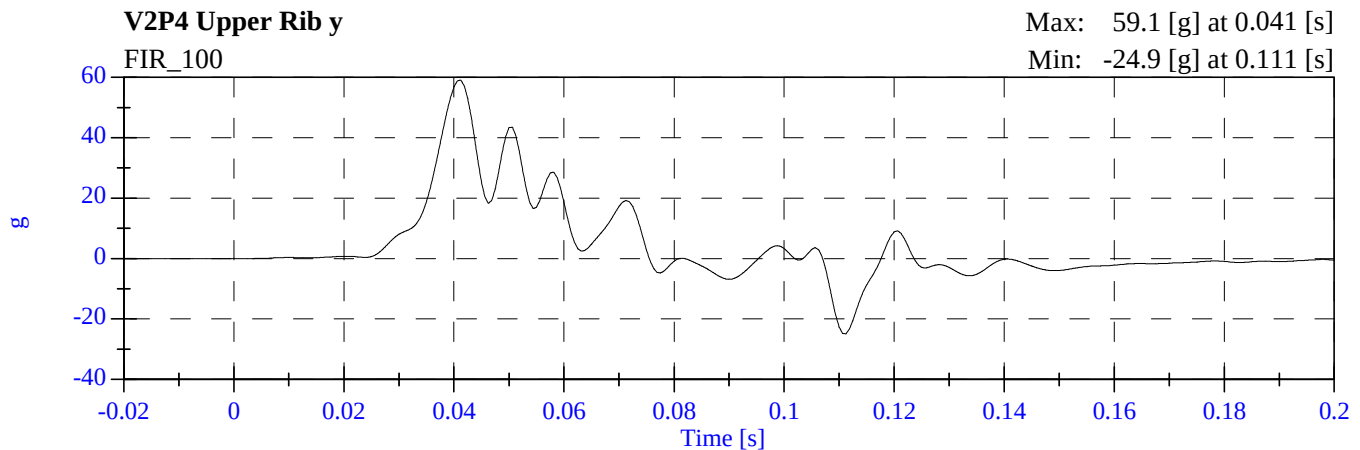

**APPENDIX C**

**DUMMY CONFIGURATION AND PERFORMANCE VERIFICATION DATA**

**SUMMARY**  
**SID H3 PRE & POST TEST CALIBRATION**

**CONFIGURED FOR LEFT SIDE IMPACT**

Date: 2/19/07 Sequential Test Number: 4  
Laboratory Technician: B. Swiecicki

| TEST PARAMETER                     | SPECIFICATION | SID H3 NO.: 269 |           | SID H3 NO.: 270 |           |
|------------------------------------|---------------|-----------------|-----------|-----------------|-----------|
|                                    |               | PRE TEST        | POST TEST | PRE TEST        | POST TEST |
| SH- Seated Height (mm)             | 889 - 909     | 899             | 899       | 899             | 899       |
| RH- Rib Height (mm)                | 501 - 521     | 505             | 505       | 506             | 506       |
| HP- Hip Pivot Height (mm)          | 99 ref.       | 99              | 99        | 99              | 99        |
| RD- Rib from Back Line (mm)        | 229 - 241     | 234             | 234       | 233             | 233       |
| KV- Knee Pivot from Back Line (mm) | 511 - 526     | 518             | 518       | 516             | 516       |
| SW- Knee Pivot to Floor (mm)       | 490 - 505     | 492             | 492       | 495             | 495       |
| HW- Hip Width (mm)                 | 356 - 391     | 384             | 384       | 386             | 386       |
| <b>THORAX IMPACTS</b>              |               |                 |           |                 |           |
| TEMPERATURE (• C)                  | 18.9 - 25.5   | 21.1            | 21.1      | 21.1            | 21.1      |
| RELATIVE HUMIDITY (%)              | 10 - 70       | 31.0            | 38.0      | 31.0            | 38.0      |
| PROBE SPEED (m/s)                  | 4.27 - 4.33   | 4.30            | 4.32      | 4.31            | 4.28      |
| UPPER RIB (g's)                    | 37 - 46       | 40.56           | 41.29     | 39.45           | 39.12     |
| LOWER RIB (g's)                    | 37 - 46       | 41.62           | 41.90     | 37.59           | 38.13     |
| LOWER SPINE (g's)                  | 15 - 22       | 18.04           | 19.01     | 19.56           | 19.20     |
| <b>PELVIS IMPACT</b>               |               |                 |           |                 |           |
| TEMPERATURE (• C)                  | 18.9 - 25.5   | 21.1            | 21.1      | 21.1            | 21.1      |
| RELATIVE HUMIDITY (%)              | 10 - 70       | 31.0            | 38.0      | 32.0            | 38.0      |
| PROBE SPEED (m/s)                  | 4.27 - 4.33   | 4.30            | 4.32      | 4.32            | 4.33      |
| PELVIS (g's)                       | 40 - 60       | 47.17           | 56.23     | 50.78           | 42.92     |

**REMARKS:** None



## **CALIBRATION TEST RESULTS**

### **PRE-TEST**

**SID H3 NO.:** 269

**CONFIGURED FOR LEFT SIDE IMPACT**

**CALIBRATION TEST RESULTS SUMMARY  
PRE-TEST**

**CONFIGURED FOR LEFT SIDE IMPACT**

|                        |                                     |
|------------------------|-------------------------------------|
| SID H3 Serial No.: 269 | Sequential Test Number: 3           |
| Date: 2/07/07          | Laboratory Technician: B. Swiecicki |

| TEST                         | COMMENTS                 |
|------------------------------|--------------------------|
| EXTERNAL DIMENSIONS          | Passed all requirements. |
| THORACIC SHOCK ABSORBER TEST | Passed all requirements. |
| LATERAL THORAX IMPACT TEST   | Passed all requirements. |
| LATERAL PELVIS IMPACT TEST   | Passed all requirements. |
| HEAD DROP TEST*              | Passed all requirements. |
| LATERAL NECK BEND TEST*      | Passed all requirements. |
| ABDOMINAL COMPRESSION TEST*  | Passed all requirements. |
| LUMBAR FLEXION TEST*         | Passed all requirements. |

\* Test not required for SID certification.

**REMARKS:** None

**EXTERNAL DIMENSIONS  
PRE-TEST**

**CONFIGURED FOR LEFT SIDE IMPACT**

|                        |                                     |  |
|------------------------|-------------------------------------|--|
| SID H3 Serial No.: 269 | Sequential Test Number: 3           |  |
| Date: 2/07/07          | Laboratory Technician: B. Swiecicki |  |

| TEST PARAMETER                     | SPECIFICATION | TEST RESULTS |
|------------------------------------|---------------|--------------|
| SH- Seated Height (mm)             | 889 – 909     | 899          |
| RH- Rib Height (mm)                | 502 – 520     | 505          |
| HP- Hip Pivot Height (mm)          | 99 ref.       | 99           |
| RD- Rib from Back Line (mm)        | 229 – 241     | 234          |
| KH- Knee Pivot from Back Line (mm) | 511 – 526     | 518          |
| KV- Knee Pivot to Floor (mm)       | 490 – 505     | 492          |
| HW- Hip Width (mm)                 | 356 - 391     | 384          |



**REMARKS:** None

**Shock Impact Low ( 3.05 m/s )**  
**PRE TEST**  
**CONFIGURED FOR LEFT SIDE IMPACT**

ATD Serial No: 269  
Date: 12-01-06

Sequential Test Number: 1 File: 269SL 12-01-06  
Laboratory Technician: B. Swiecicki

| TEST PARAMETER         | SPECIFICATION    | TEST RESULTS | STATUS |
|------------------------|------------------|--------------|--------|
| Lab Temperature:       | 18.9-25.5 C      | 21.1 C       | Passed |
| Lab Humidity:          | 10-70 %          | 36.00 %      | Passed |
| Displacement:          | 30.00-35.00 mm   | 30.27 mm     | Passed |
| Maximum Force:         | 836.00-1125.00 N | 1112.90 N    | Passed |
| Impact Test Velocity:  | 3.05 m/s         |              |        |
| Damper Identification: | 269              |              |        |
| Damper Setting:        | 5                |              |        |

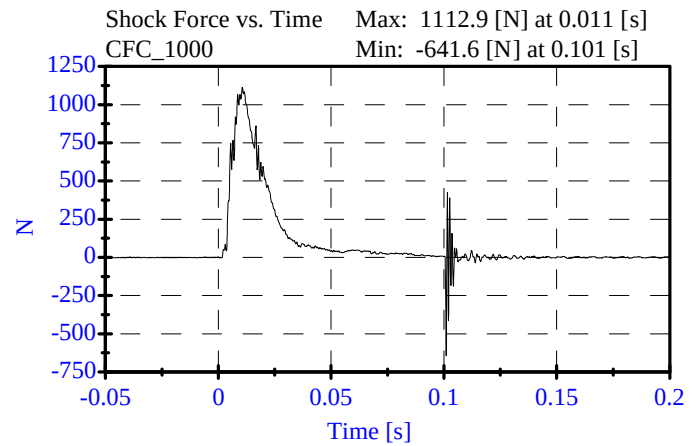
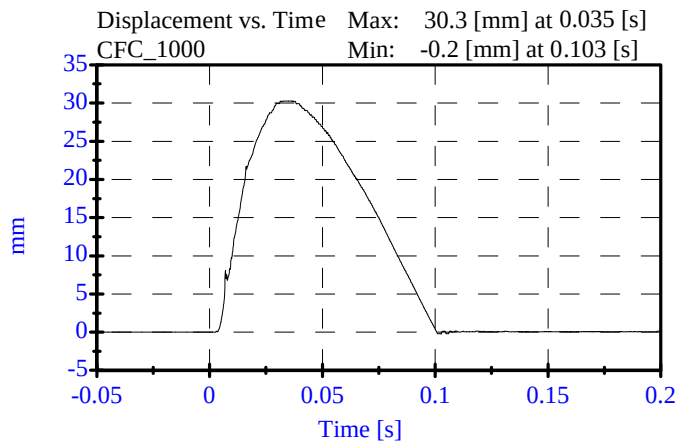


**Shock Impact Med ( 4.27 m/s )**  
**PRE TEST**  
**CONFIGURED FOR LEFT SIDE IMPACT**

ATD Serial No: 269  
Date: 12-01-06

Sequential Test Number: 1 File: 269SM3 12-01-06  
Laboratory Technician: B. Swiecicki

| TEST PARAMETER         | SPECIFICATION     | TEST RESULTS | STATUS |
|------------------------|-------------------|--------------|--------|
| Lab Temperature:       | 18.9-25.5 C       | 21.1 C       | Passed |
| Lab Humidity:          | 10-70 %           | 36.00 %      | Passed |
| Displacement:          | 32.00-37.00 mm    | 35.76 mm     | Passed |
| Maximum Force:         | 1730.00-2099.00 N | 1938.61 N    | Passed |
| Impact Test Velocity:  | 4.27 m/s          |              |        |
| Damper Identification: | 269               |              |        |
| Damper Setting:        | 5                 |              |        |

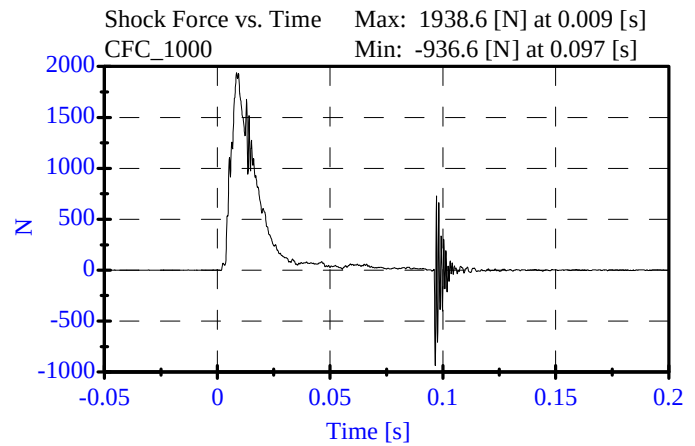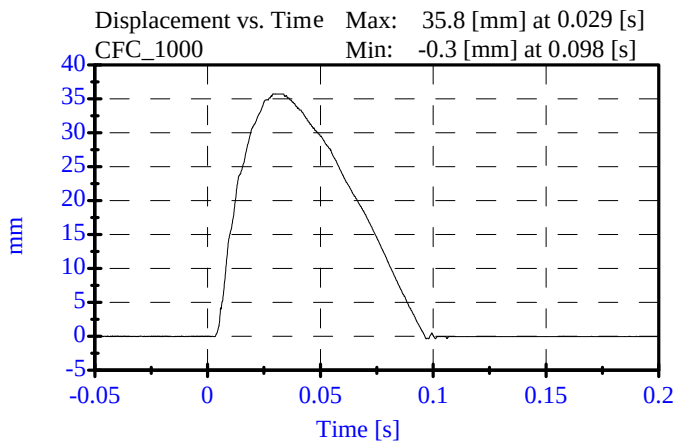



## Shock Impact High ( 6.10 m/s )

### PRE TEST

### CONFIGURED FOR LEFT SIDE IMPACT



ATD Serial No: 269

Date: 12-01-06

Sequential Test Number: 1 File: 269SH2 12-01-06

Laboratory Technician: B. Swiecicki

| TEST PARAMETER         | SPECIFICATION     | TEST RESULTS | STATUS |
|------------------------|-------------------|--------------|--------|
| Lab Temperature:       | 18.9-25.5 C       | 21.1 C       | Passed |
| Lab Humidity:          | 10-70 %           | 36.00 %      | Passed |
| Displacement:          | 33.00-40.00 mm    | 38.86 mm     | Passed |
| Maximum Force:         | 3741.00-4448.00 N | 3851.03 N    | Passed |
| Impact Test Velocity:  | 6.10 m/s          |              |        |
| Damper Identification: | 269               |              |        |
| Damper Setting:        | 5                 |              |        |





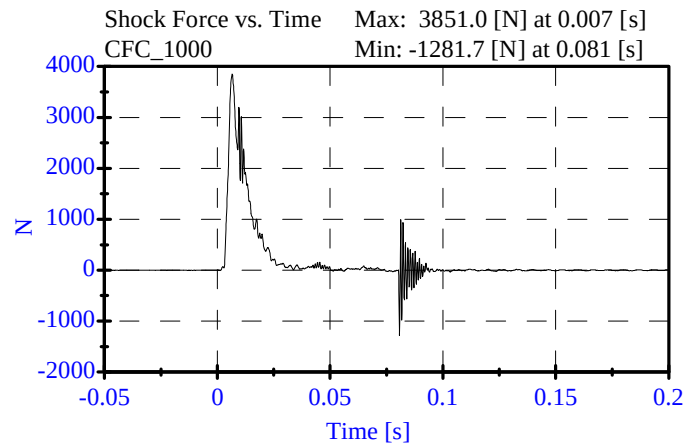
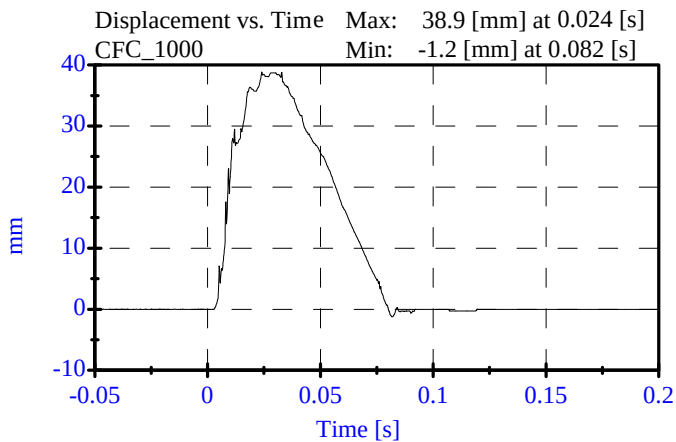


**Thorax Impact**  
**Pre-Test**  
**CONFIGURED FOR LEFT SIDE IMPACT**

ATD Serial No: 269  
Date: 02-07-07

Sequential Test Number: 1 File: 269T 02-07-07  
Laboratory Technician: B. Swiecicki

| TEST PARAMETER            | SPECIFICATION   | TEST RESULTS | STATUS |
|---------------------------|-----------------|--------------|--------|
| Lab Temperature:          | 18.9-25.5 C     | 21.1 C       | Passed |
| Lab Humidity:             | 10-70 %         | 31.00 %      | Passed |
| Probe Velocity:           | 4.27- 4.33 m/s  | 4.30 m/s     | Passed |
| Upper Rib Acceleration:   | 37.00-46.00 G's | 40.56 G's    | Passed |
| Lower Rib Acceleration:   | 37.00-46.00 G's | 41.62 G's    | Passed |
| Lower Spine Acceleration: | 15.00-22.00 G's | 18.04 G's    | Passed |

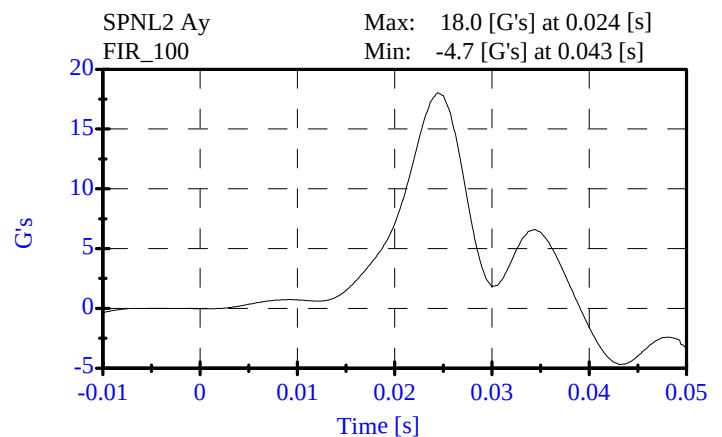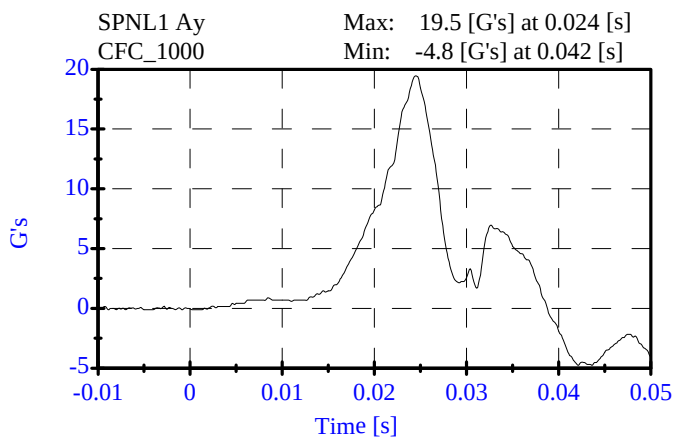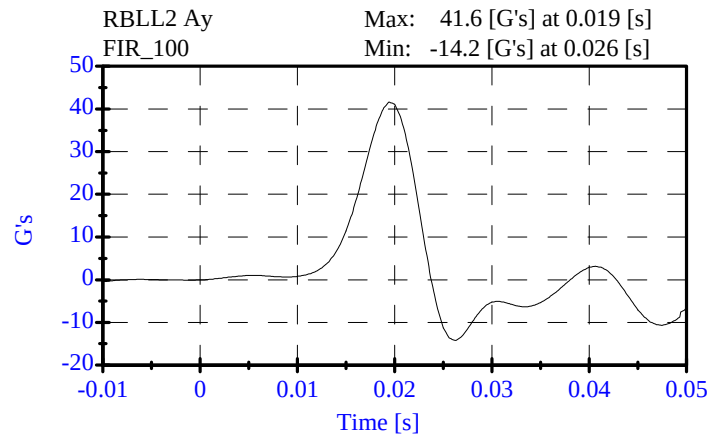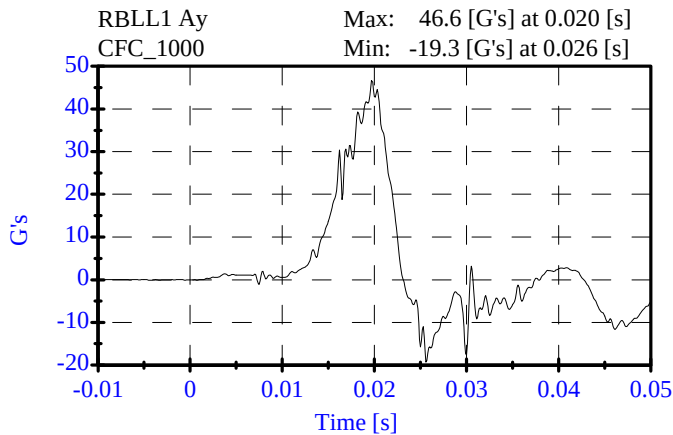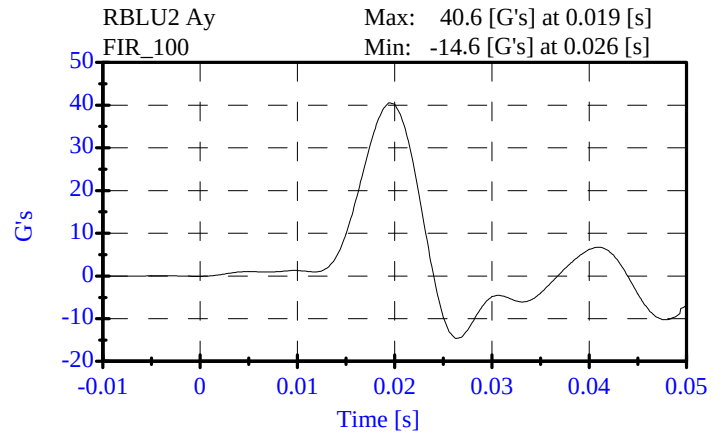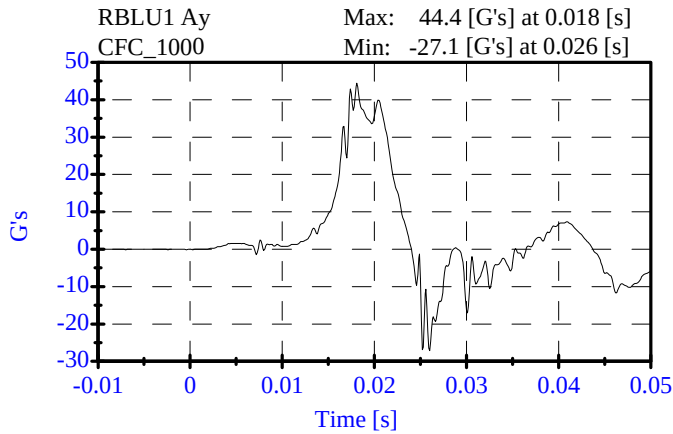

## Pelvic Impact

### Pre-Test

#### CONFIGURED FOR LEFT SIDE IMPACT



ATD Serial No: 269

Date: 02-07-07

Sequential Test Number: 1 File: 269P 02-07-07

Laboratory Technician: B. Swiecicki

| TEST PARAMETER         | SPECIFICATION   | TEST RESULTS | STATUS |
|------------------------|-----------------|--------------|--------|
| Lab Temperature:       | 18.9-25.5 C     | 21.1 C       | Passed |
| Lab Humidity:          | 10-70 %         | 31.00 %      | Passed |
| Probe Velocity:        | 4.27- 4.33 m/s  | 4.30 m/s     | Passed |
| Pelvis Y Acceleration: | 40.00-60.00 G's | 47.17 G's    | Passed |
| Time Above 20 Gs       | 3.0-7.0 ms      | 5.4 ms       | Passed |



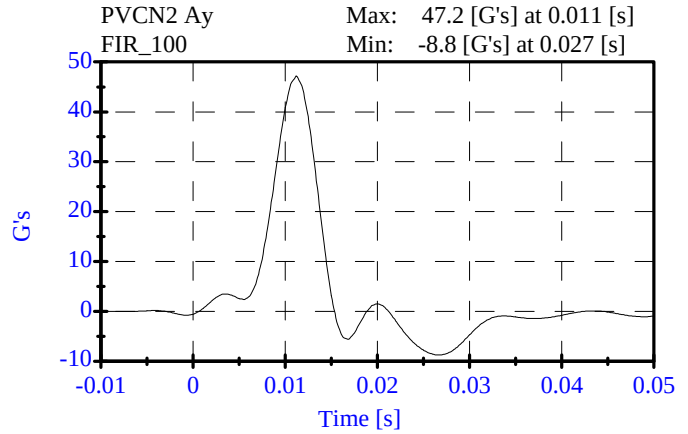
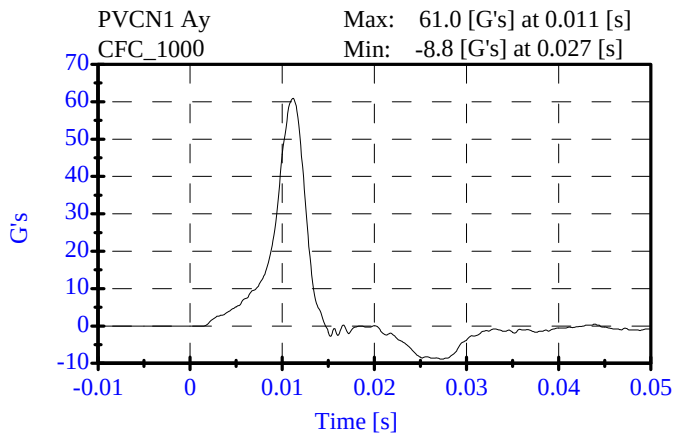


# **Head Drop** **Pre-Test** **CONFIGURED FOR LEFT SIDE IMPACT**

ATD Serial No: 269  
Date: 02-02-07

Sequential Test Number: 1 File: 269HD1 02-02-07  
Laboratory Technician: B. Swiecicki

| TEST PARAMETER          | SPECIFICATION | TEST RESULTS | STATUS |
|-------------------------|---------------|--------------|--------|
| Lab Temperature:        | 18.9-25.6 C   | 21.1 C       | Passed |
| Lab Humidity:           | 10-70 %       | 30.00 %      | Passed |
| Peak Resultant Accel.:  | 120-150 Gs    | 139.07 Gs    | Passed |
| Peak Lateral Accel.:    | 15 Gs Max     | 6.39 Gs      | Passed |
| Curve PerCent NonModal: | < 15%         | 1.89 %       | Passed |

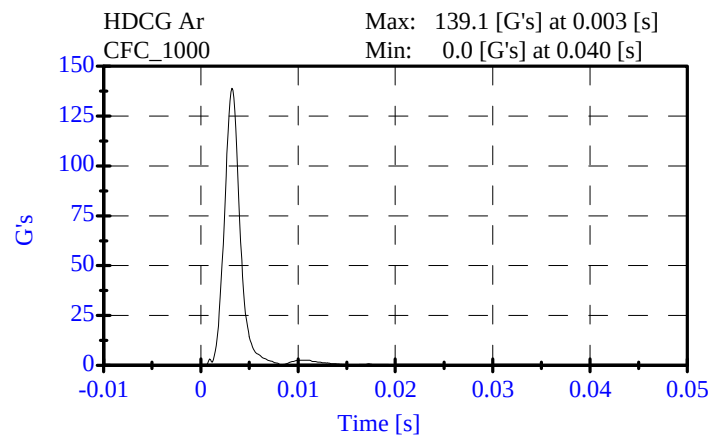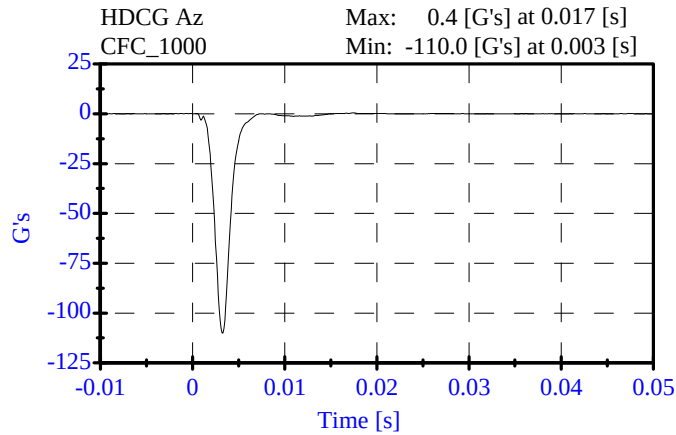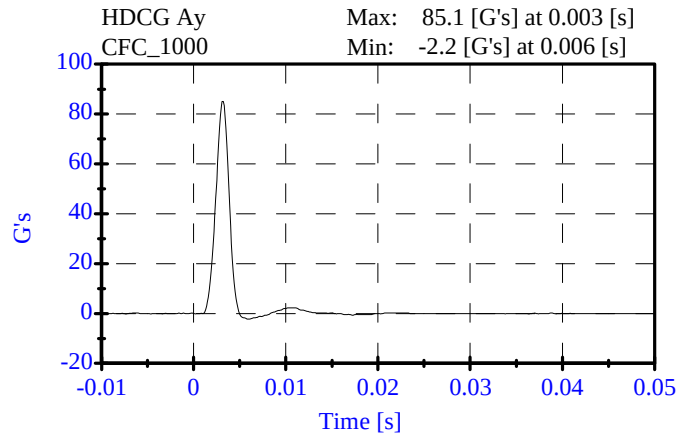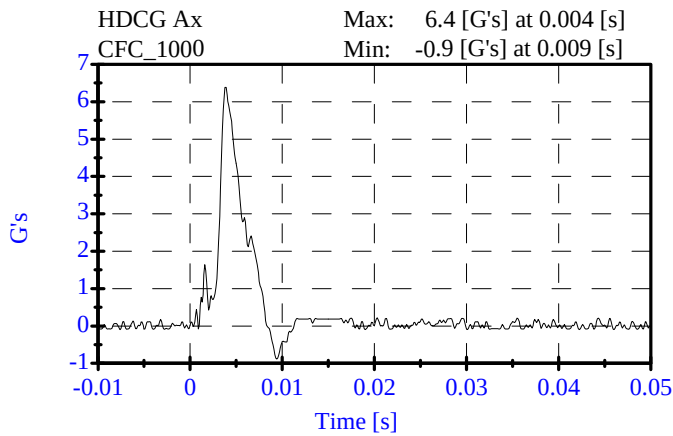

**Neck Test****Pre-Test****CONFIGURED FOR LEFT SIDE IMPACT**

ATD Serial No: 269

Date: 02-05-07

Sequential Test Number: 1 File: 269NECK2 02-05-07

Laboratory Technician: B. Swiecicki

| <u>TEST PARAMETER</u>                                           | <u>SPECIFICATION</u> | <u>TEST RESULTS</u> | <u>STATUS</u> |
|-----------------------------------------------------------------|----------------------|---------------------|---------------|
| Lab Temperature:                                                | 20.6-22.2 C          | 21.1 C              | Passed        |
| Lab Humidity:                                                   | 10-70 %              | 40.00 %             | Passed        |
| Impact Velocity:                                                | 6.89- 7.13 m/s       | 7.00 m/s            | Passed        |
| PENDULUM DELTA V                                                |                      |                     |               |
| Delta V at 10 ms:                                               | 1.96- 2.55 m/s       | 2.18 m/s            | Passed        |
| Delta V at 20 ms:                                               | 4.12- 5.10 m/s       | 4.54 m/s            | Passed        |
| Delta V at 30 ms:                                               | 5.73- 7.01 m/s       | 6.47 m/s            | Passed        |
| Delta V between 40-70 ms:                                       | 6.27- 7.64 m/s       | 7.13 m/s            | Passed        |
| D PLANE ROTATION                                                |                      |                     |               |
| Maximum Rotation:                                               | 66.0-82.0 Deg        | 67.84 Deg           | Passed        |
| Rotation Angle Decay:                                           | 58.0-67.0 ms         | 59.70 ms            | Passed        |
| MOMENT ABOUT THE OCCIPITAL CONDYLE                              |                      |                     |               |
| Max Occipital Moment:                                           | 73.00- 88.00 N-m     | 83.29 N-m           | Passed        |
| Occipital Moment Decay:                                         | 49.0-64.0 ms         | 54.60 ms            | Passed        |
| HEAD ROTATION TIME WITH RESPECT TO THE OCCIPITAL CONDYLE MOMENT |                      |                     |               |
| Moment to Rotation Peak:                                        | 2.0-16.0 ms          | 10.00 ms            | Passed        |











**Neck Test**  
**Pre-Test**  
**CONFIGURED FOR LEFT SIDE IMPACT**

ATD Serial No: 269

Date: 02-05-07

Sequential Test Number: 1 File: 269NECK2 02-05-07

Laboratory Technician: B. Swiecicki

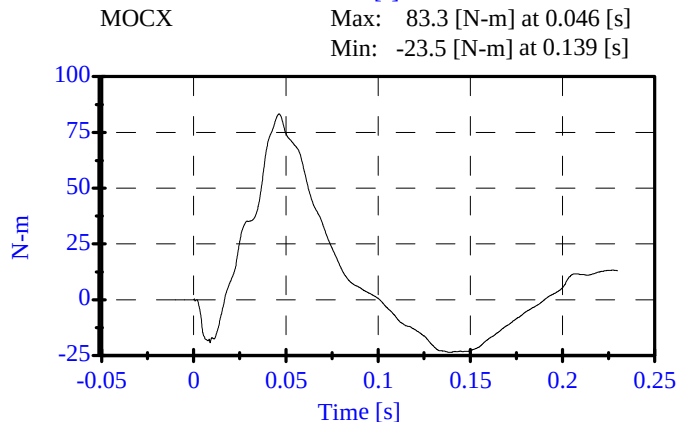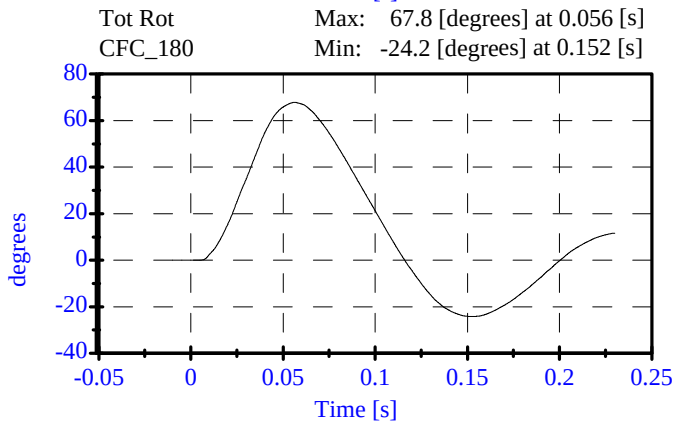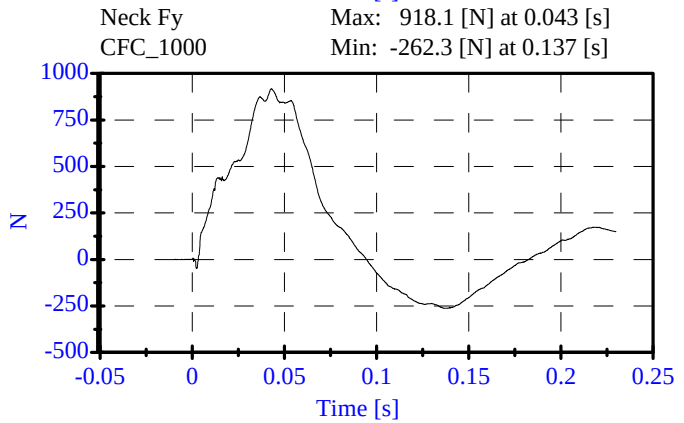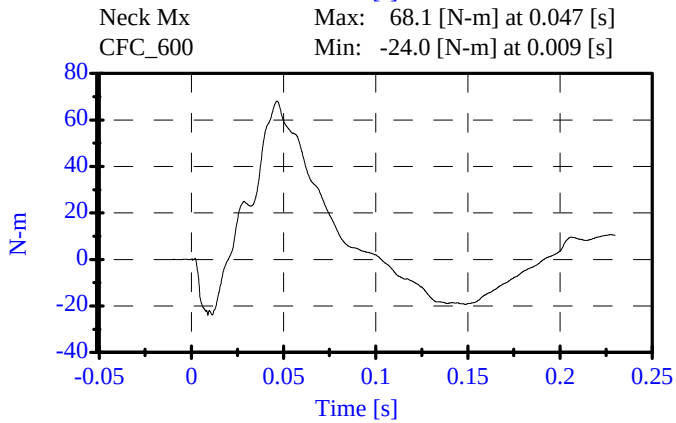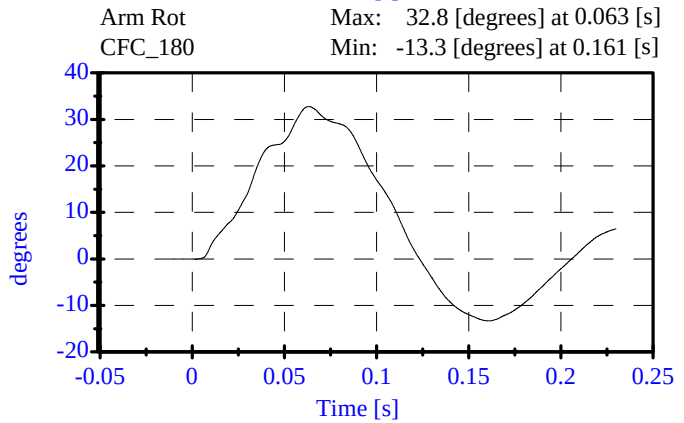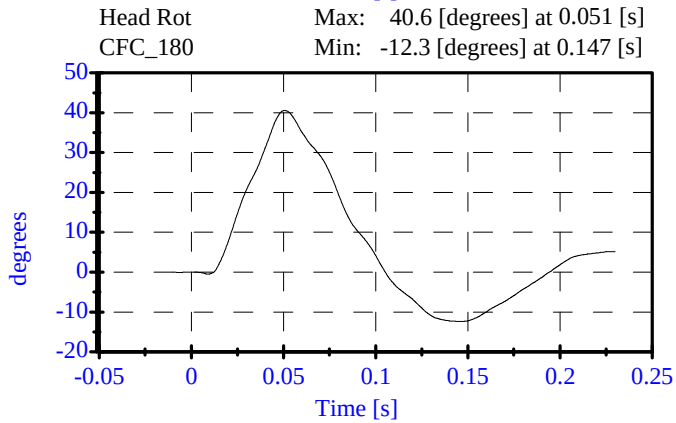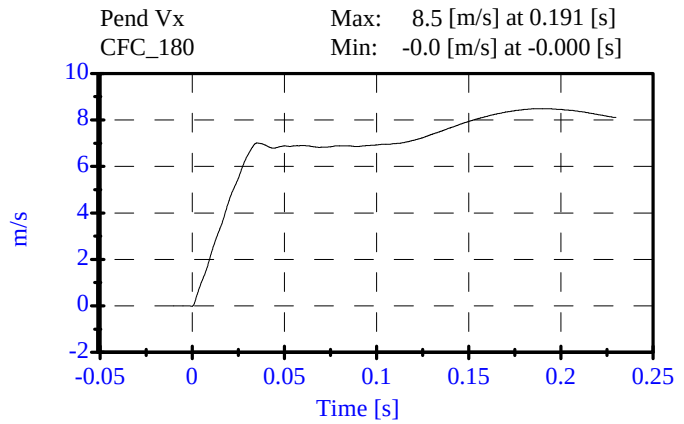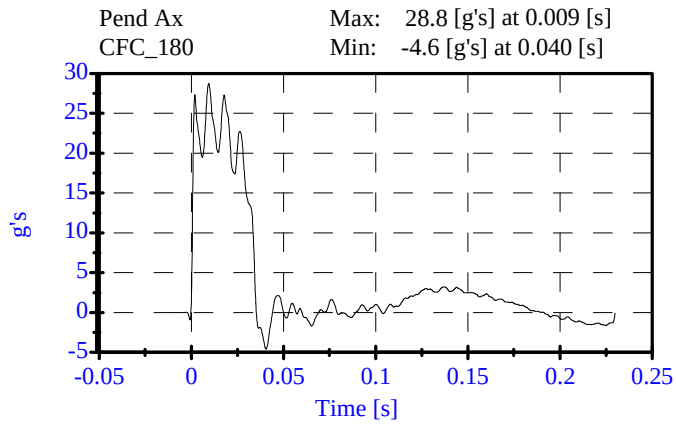

## Abdomen Test

### Pre-Test

#### CONFIGURED FOR LEFT SIDE IMPACT

ATD Serial No: 269



Date: 02-07-07

Sequential Test Number: 1 File: 269ab 02-07-07

Laboratory Technician: B. Swiecicki

| TEST PARAMETER      | SPECIFICATION   | TEST RESULTS | STATUS |
|---------------------|-----------------|--------------|--------|
| Lab Temperature:    | 18.9-25.5 C     | 21.1 C       | Passed |
| Lab Humidity:       | 10-70 %         | 31.00 %      | Passed |
| Force at 12.95 mm : | 104.00-162.00 N | 124.77 N     | Passed |
| Force at 19.05 mm : | 162.98-220.99 N | 190.74 N     | Passed |
| Force at 25.40 mm : | 221.97-280.02 N | 269.03 N     | Passed |
| Force at 33.02 mm : | 324.99-391.00 N | 372.70 N     | Passed |

#### ABDOMINAL COMPRESSION TEST

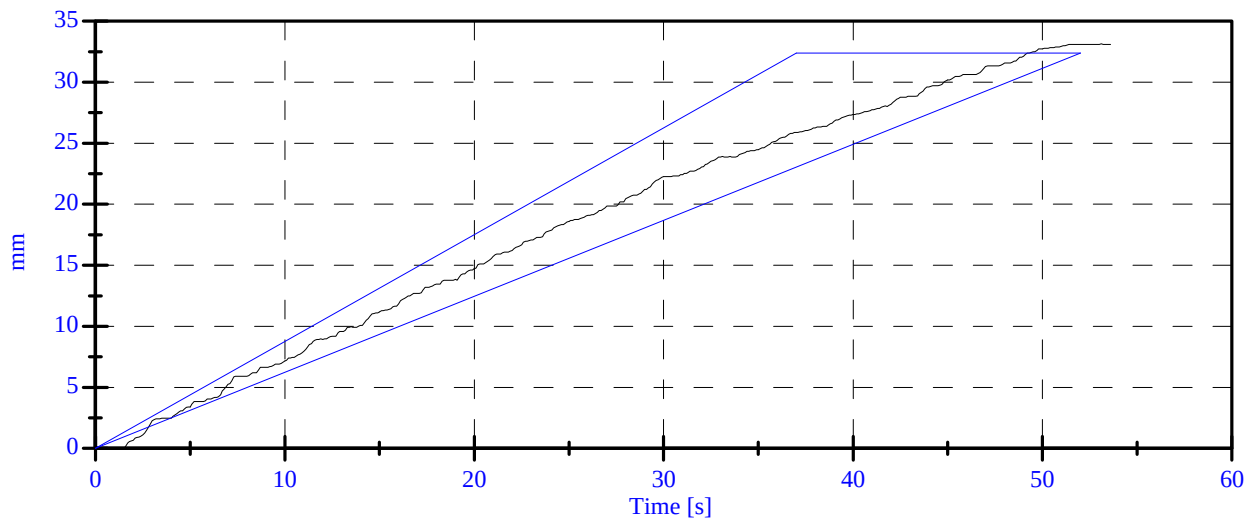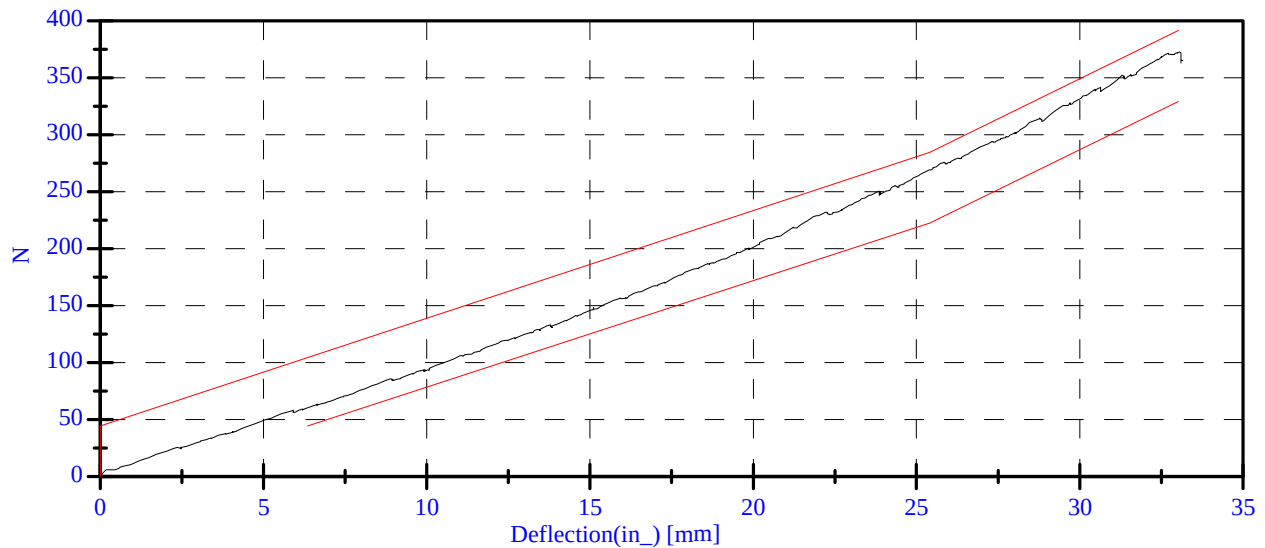



**Lumbar Spine  
Pre-Test  
CONFIGURED FOR LEFT SIDE IMPACT**

ATD Serial No: 269  
Date: 02-07-07

Sequential Test Number: 1 File: 269sp 02-07-07  
Laboratory Technician: B. Swiecicki

| TEST PARAMETER   | SPECIFICATION   | TEST RESULTS | STATUS |
|------------------|-----------------|--------------|--------|
| Lab Temperature: | 18.9-25.5 C     | 21.1 C       | Passed |
| Lab Humidity:    | 10-70 %         | 31.00 %      | Passed |
| Force at 0 Deg:  | 0.00-26.69 N    | 13.45 N      | Passed |
| Force at 20 Deg: | 97.86-151.24 N  | 107.99 N     | Passed |
| Force at 30 Deg  | 151.24-204.62 N | 153.43 N     | Passed |
| Force at 40 Deg  | 204.62-258.00 N | 210.63 N     | Passed |
| Return Angle     | 12 Deg Max      | 0.22 deg     | Passed |

**LUMBAR SPINE FLEXION TEST**

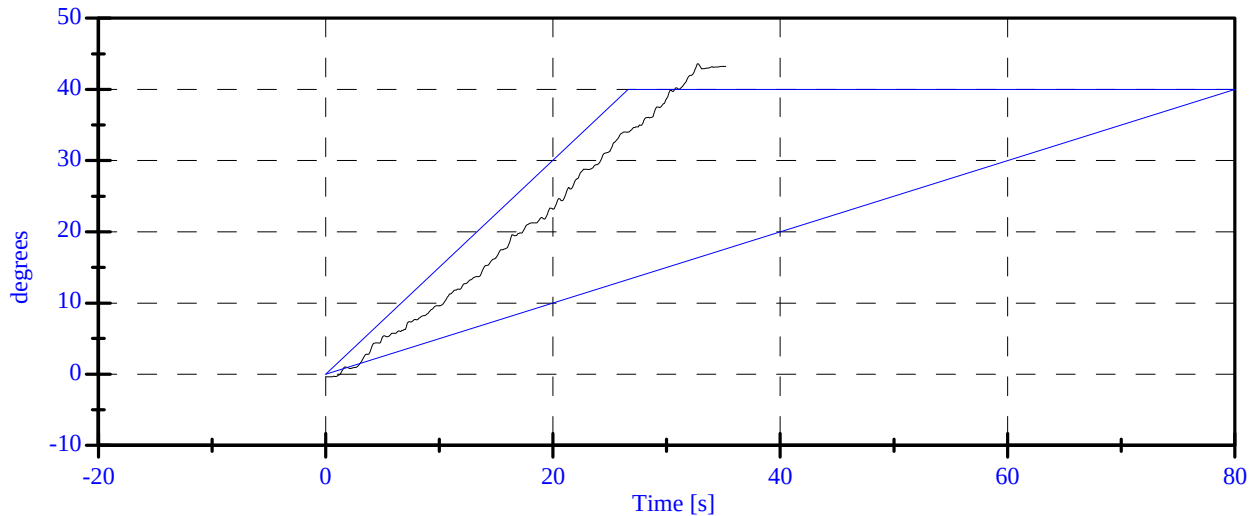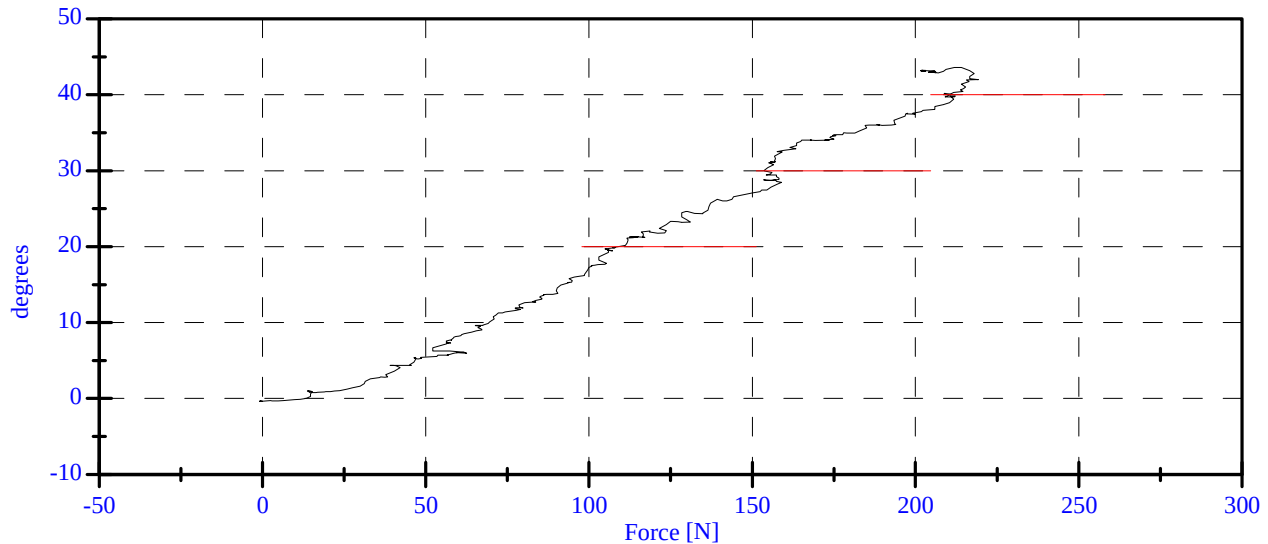

**PRE-TEST DUMMY INSPECTION LIST**  
**CONFIGURED FOR LEFT SIDE IMPACT**

SID H3 Serial No.: 269 Sequential Test Number: 3  
 Date: 2/07/07 Laboratory Technician: B. Swiecicki

| PART         | ITEMS CHECKED                                     | COMMENTS |
|--------------|---------------------------------------------------|----------|
| SKIN         | VISUAL INSPECTION                                 | OK       |
| HEAD         | VISUAL, BALLAST,<br>ACCELEROMETER MOUNT           | OK       |
| NECK         | VISUAL, CABLE TORQUE                              | OK       |
| SPINE BOX    | VISUAL, BALLAST, WELDMENT,<br>ACCELEROMETER MOUNT | OK       |
| RIB CAGE     | VISUAL, MEASURE, STIFFENERS                       | OK       |
| STERNUM      | VISUAL                                            | OK       |
| LUMBAR SPINE | VISUAL                                            | OK       |
| ABDOMEN      | VISUAL                                            | OK       |
| PELVIS       | VISUAL, PALPATE,<br>ACCELEROMETER MOUNT           | OK       |
| UPPER LEGS   | VISUAL                                            | OK       |
| KNEES        | VISUAL, STOPS, INSERTS                            | OK       |
| LOWER LEGS   | VISUAL, RANGE OF MOTION                           | OK       |
| ANKLES       | VISUAL, RANGE OF MOTION                           | OK       |
| FEET         | VISUAL, RANGE OF MOTION                           | OK       |
| JOINTS       | 1 TO 2 g RANGE                                    | OK       |
| OTHER        | NONE                                              | -        |

**REMARKS:** None

## **CALIBRATION TEST RESULTS**

### **PRE-TEST**

**SID H3 NO.:** 270

**CONFIGURED FOR** LEFT SIDE IMPACT



**CALIBRATION TEST RESULTS SUMMARY  
PRE-TEST**

**CONFIGURED FOR LEFT SIDE IMPACT**

|                        |                                     |
|------------------------|-------------------------------------|
| SID H3 Serial No.: 270 | Sequential Test Number: 3           |
| Date: 2/07/07          | Laboratory Technician: B. Swiecicki |

| TEST                         | COMMENTS                 |
|------------------------------|--------------------------|
| EXTERNAL DIMENSIONS          | Passed all requirements. |
| THORACIC SHOCK ABSORBER TEST | Passed all requirements. |
| LATERAL THORAX IMPACT TEST   | Passed all requirements. |
| LATERAL PELVIS IMPACT TEST   | Passed all requirements. |
| HEAD DROP TEST*              | Passed all requirements. |
| LATERAL NECK BEND TEST*      | Passed all requirements. |
| ABDOMINAL COMPRESSION TEST*  | Passed all requirements. |
| LUMBAR FLEXION TEST*         | Passed all requirements. |

\* Test not required for SID certification.

**REMARKS:** None

**EXTERNAL DIMENSIONS  
PRE-TEST**

**CONFIGURED FOR LEFT SIDE IMPACT**

|                        |                                     |
|------------------------|-------------------------------------|
| SID H3 Serial No.: 270 | Sequential Test Number: 3           |
| Date: 2/07/07          | Laboratory Technician: B. Swiecicki |

| TEST PARAMETER                     | SPECIFICATION | TEST RESULTS |
|------------------------------------|---------------|--------------|
| SH- Seated Height (mm)             | 889 - 909     | 899          |
| RH- Rib Height (mm)                | 502 - 520     | 506          |
| HP- Hip Pivot Height (mm)          | 99 ref.       | 99           |
| RD- Rib from Back Line (mm)        | 229 - 241     | 233          |
| KH- Knee Pivot from Back Line (mm) | 511 - 526     | 516          |
| KV- Knee Pivot to Floor (mm)       | 490 - 505     | 495          |
| HW- Hip Width (mm)                 | 356 - 391     | 386          |



**REMARKS:** None

**Shock Impact Low ( 3.05 m/s )**  
**PRE TEST**  
**CONFIGURED FOR LEFT SIDE IMPACT**

ATD Serial No: 270  
Date: 12-01-06

Sequential Test Number: 1    File: 270SL 12-01-06  
Laboratory Technician: B. Swiecicki

| TEST PARAMETER         | SPECIFICATION    | TEST RESULTS | STATUS |
|------------------------|------------------|--------------|--------|
| Lab Temperature:       | 18.9-25.5 C      | 21.1 C       | Passed |
| Lab Humidity:          | 10-70 %          | 36.00 %      | Passed |
| Displacement:          | 30.00-35.00 mm   | 30.44 mm     | Passed |
| Maximum Force:         | 836.00-1125.00 N | 1028.17 N    | Passed |
| Impact Test Velocity:  | 3.05 m/s         |              |        |
| Damper Identification: | 270              |              |        |
| Damper Setting:        | 5                |              |        |

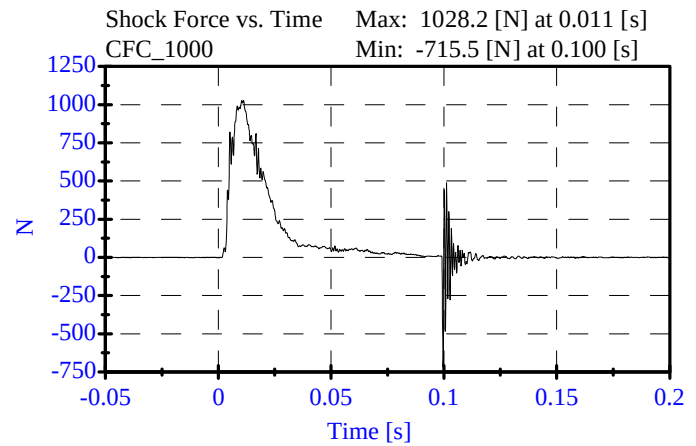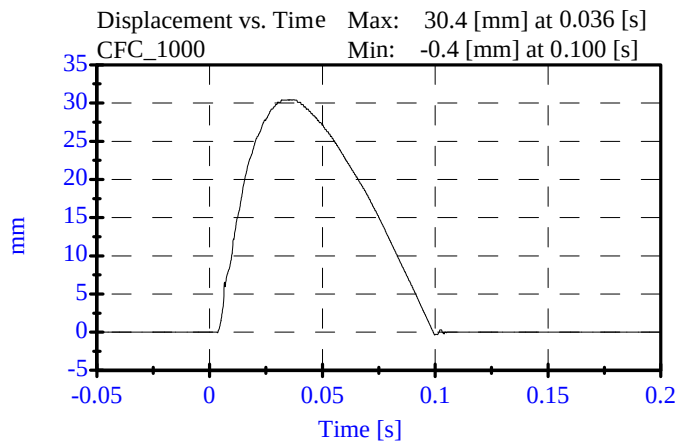

# Shock Impact Med ( 4.27 m/s )

## PRE TEST

### CONFIGURED FOR LEFT SIDE IMPACT



ATD Serial No: 270

Date: 12-01-06

Sequential Test Number: 1 File: 270SM 12-01-06

Laboratory Technician: B. Swiecicki

| TEST PARAMETER         | SPECIFICATION     | TEST RESULTS | STATUS |
|------------------------|-------------------|--------------|--------|
| Lab Temperature:       | 18.9-25.5 C       | 21.1 C       | Passed |
| Lab Humidity:          | 10-70 %           | 36.00 %      | Passed |
| Displacement:          | 32.00-37.00 mm    | 33.69 mm     | Passed |
| Maximum Force:         | 1730.00-2099.00 N | 1960.83 N    | Passed |
| Impact Test Velocity:  | 4.27 m/s          |              |        |
| Damper Identification: | 270               |              |        |
| Damper Setting:        | 5                 |              |        |

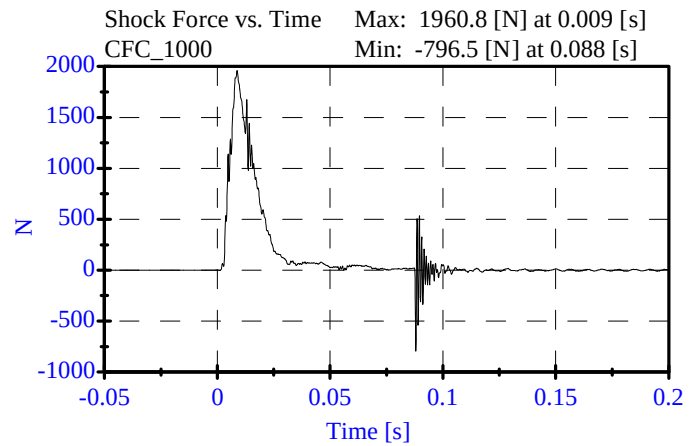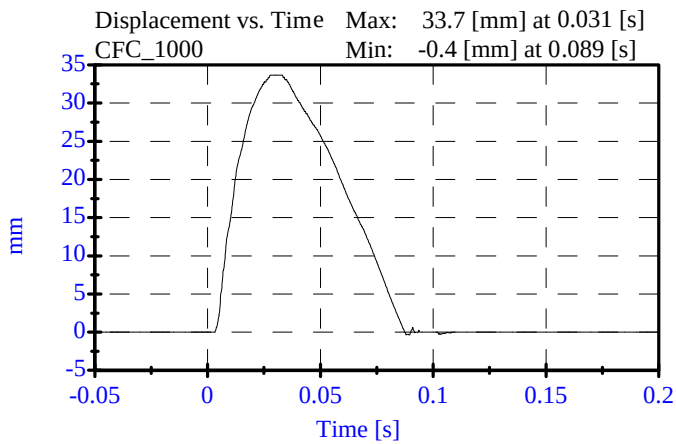

## Shock Impact High ( 6.10 m/s )

### PRE TEST

### CONFIGURED FOR LEFT SIDE IMPACT



ATD Serial No: 270

Date: 12-01-06

Sequential Test Number: 1 File: 270SH 12-01-06

Laboratory Technician: B. Swiecicki

| TEST PARAMETER         | SPECIFICATION     | TEST RESULTS | STATUS |
|------------------------|-------------------|--------------|--------|
| Lab Temperature:       | 18.9-25.5 C       | 21.1 C       | Passed |
| Lab Humidity:          | 10-70 %           | 36.00 %      | Passed |
| Displacement:          | 33.00-40.00 mm    | 36.94 mm     | Passed |
| Maximum Force:         | 3741.00-4448.00 N | 3769.15 N    | Passed |
| Impact Test Velocity:  | 6.10 m/s          |              |        |
| Damper Identification: | 270               |              |        |
| Damper Setting:        | 5                 |              |        |

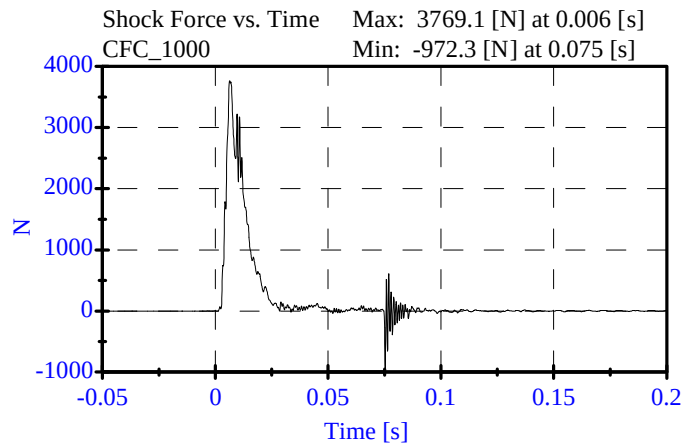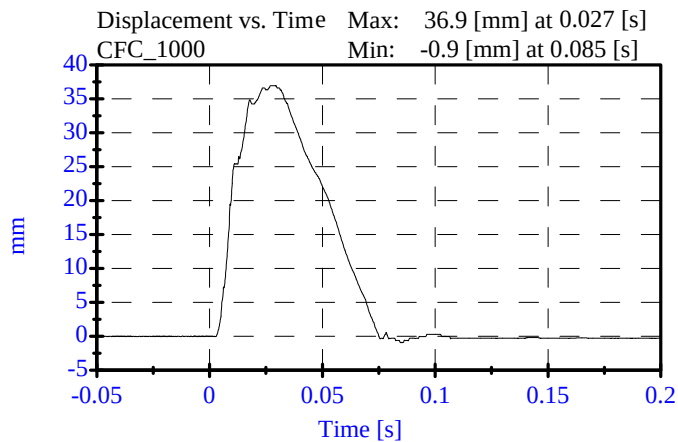









**Thorax Impact**  
**Pre-Test**  
**CONFIGURED FOR LEFT SIDE IMPACT**

ATD Serial No: 270  
Date: 02-07-07

Sequential Test Number: 1 File: 270T5 02-07-07  
Laboratory Technician: B. Swiecicki

| TEST PARAMETER            | SPECIFICATION   | TEST RESULTS | STATUS |
|---------------------------|-----------------|--------------|--------|
| Lab Temperature:          | 18.9-25.5 C     | 21.1 C       | Passed |
| Lab Humidity:             | 10-70 %         | 31.00 %      | Passed |
| Probe Velocity:           | 4.27- 4.33 m/s  | 4.31 m/s     | Passed |
| Upper Rib Acceleration:   | 37.00-46.00 G's | 39.45 G's    | Passed |
| Lower Rib Acceleration:   | 37.00-46.00 G's | 37.59 G's    | Passed |
| Lower Spine Acceleration: | 15.00-22.00 G's | 19.56 G's    | Passed |

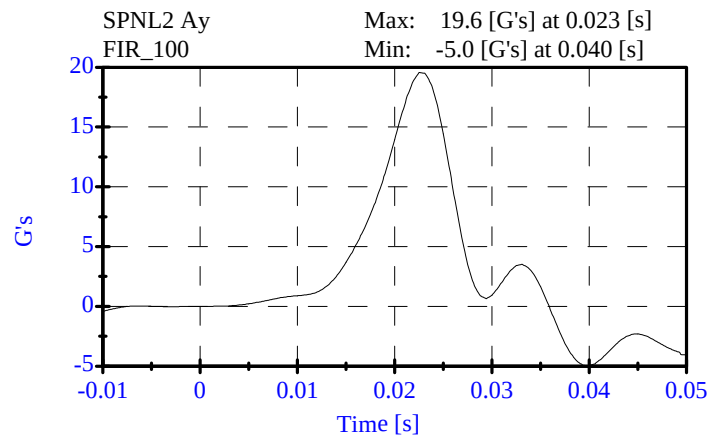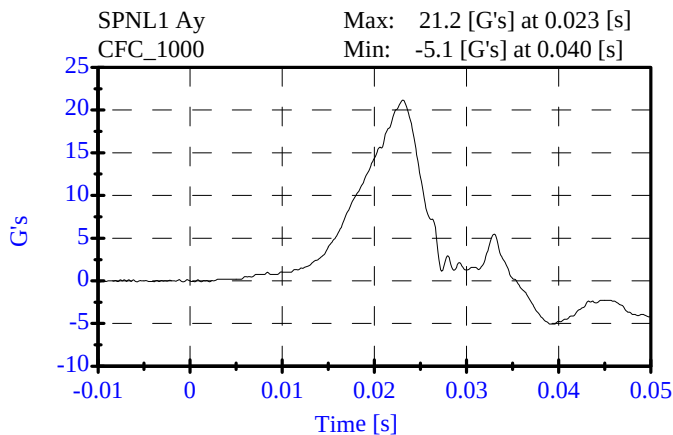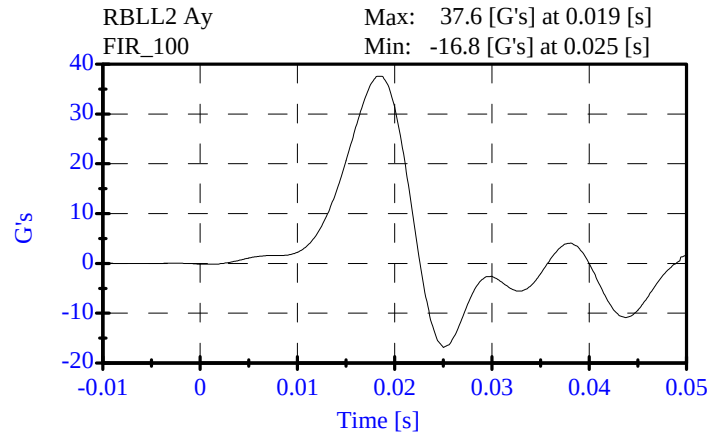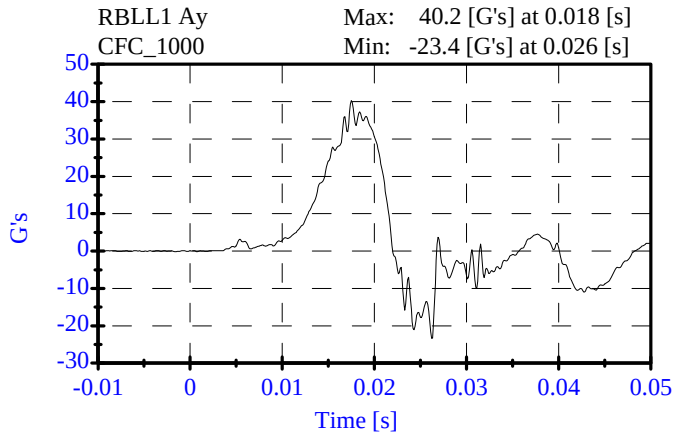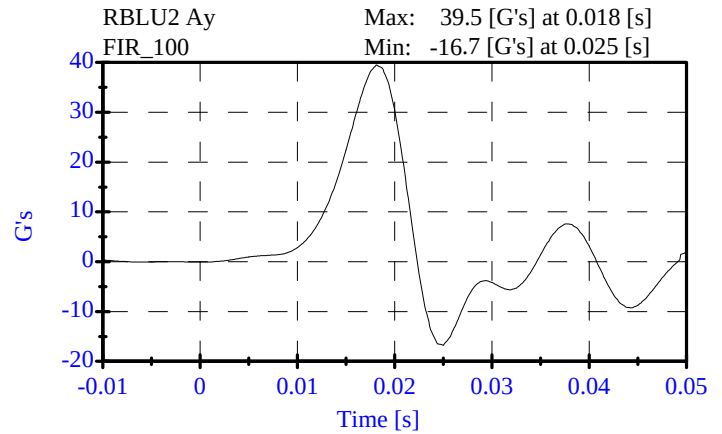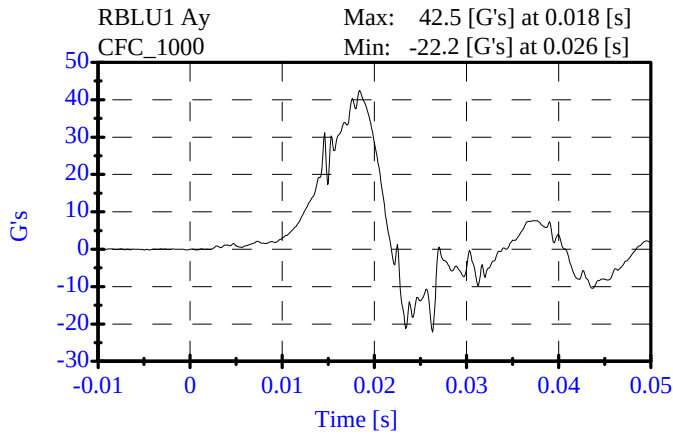

## Pelvic Impact

### Pre-Test

#### CONFIGURED FOR LEFT SIDE IMPACT



ATD Serial No: 270

Date: 02-07-07

Sequential Test Number: 1 File: 270P 02-07-07

Laboratory Technician: B. Swiecicki

| TEST PARAMETER         | SPECIFICATION   | TEST RESULTS | STATUS |
|------------------------|-----------------|--------------|--------|
| Lab Temperature:       | 18.9-25.5 C     | 21.1 C       | Passed |
| Lab Humidity:          | 10-70 %         | 32.00 %      | Passed |
| Probe Velocity:        | 4.27- 4.33 m/s  | 4.32 m/s     | Passed |
| Pelvis Y Acceleration: | 40.00-60.00 G's | 50.78 G's    | Passed |
| Time Above 20 Gs       | 3.0-7.0 ms      | 5.5 ms       | Passed |

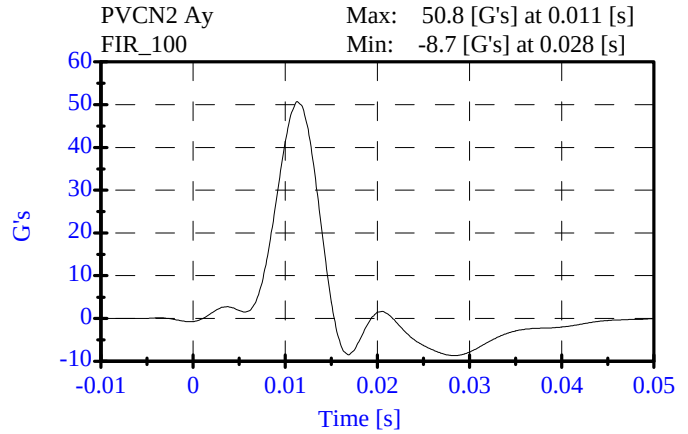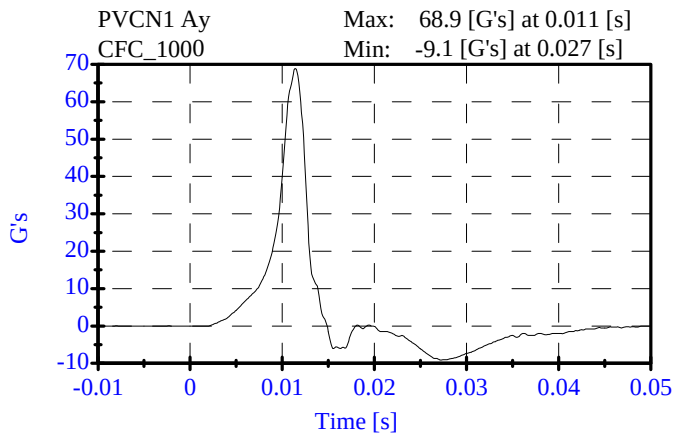





# **Head Drop** **Pre-Test**

## **CONFIGURED FOR LEFT SIDE IMPACT**

ATD Serial No: 270  
Date: 02-02-07

Sequential Test Number: 1    File: 270HD2 02-02-07  
Laboratory Technician: B. Swiecicki

| TEST PARAMETER          | SPECIFICATION | TEST RESULTS | STATUS |
|-------------------------|---------------|--------------|--------|
| Lab Temperature:        | 18.9-25.6 C   | 21.1 C       | Passed |
| Lab Humidity:           | 10-70 %       | 30.00 %      | Passed |
| Peak Resultant Accel.:  | 120-150 Gs    | 127.35 Gs    | Passed |
| Peak Lateral Accel.:    | 15 Gs Max     | 4.63 Gs      | Passed |
| Curve PerCent NonModal: | < 15%         | 2.77 %       | Passed |

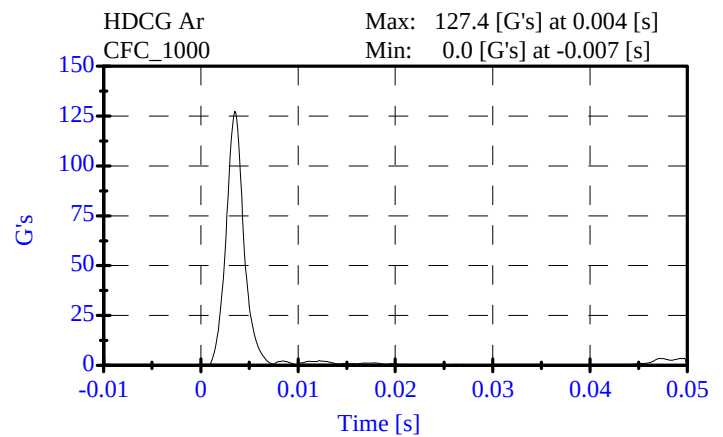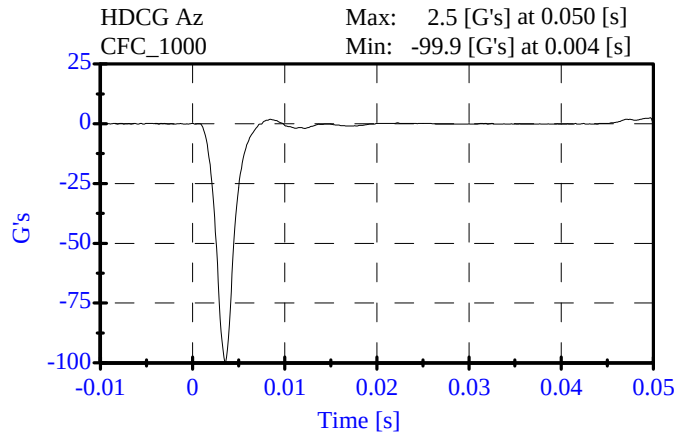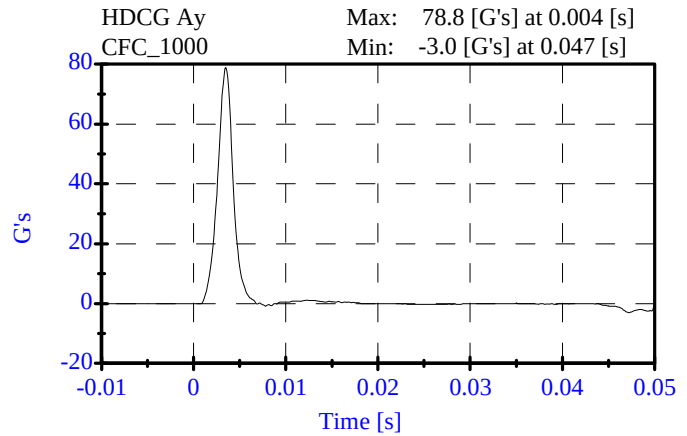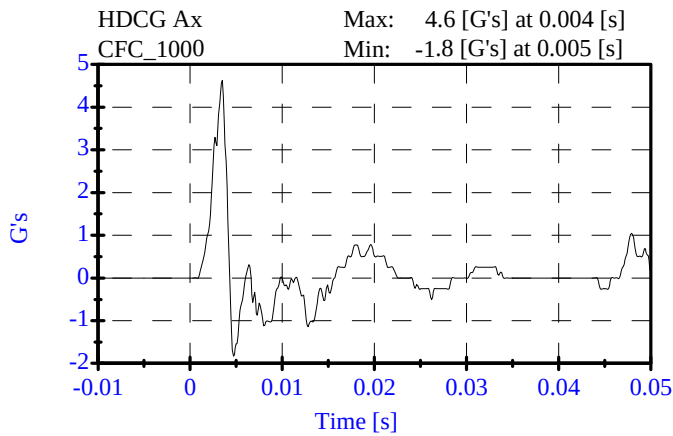

**Neck Test****Pre-Test****CONFIGURED FOR LEFT SIDE IMPACT**

ATD Serial No: 270

Date: 02-05-07

Sequential Test Number: 1 File: 270NECK2 02-05-07

Laboratory Technician: B. Swiecicki

| <u>TEST PARAMETER</u>                                           | <u>SPECIFICATION</u> | <u>TEST RESULTS</u> | <u>STATUS</u> |
|-----------------------------------------------------------------|----------------------|---------------------|---------------|
| Lab Temperature:                                                | 20.6-22.2 C          | 21.1 C              | Passed        |
| Lab Humidity:                                                   | 10-70 %              | 40.00 %             | Passed        |
| Impact Velocity:                                                | 6.89- 7.13 m/s       | 7.00 m/s            | Passed        |
| PENDULUM DELTA V                                                |                      |                     |               |
| Delta V at 10 ms:                                               | 1.96- 2.55 m/s       | 2.05 m/s            | Passed        |
| Delta V at 20 ms:                                               | 4.12- 5.10 m/s       | 4.21 m/s            | Passed        |
| Delta V at 30 ms:                                               | 5.73- 7.01 m/s       | 6.13 m/s            | Passed        |
| Delta V between 40-70 ms:                                       | 6.27- 7.64 m/s       | 7.13 m/s            | Passed        |
| D PLANE ROTATION                                                |                      |                     |               |
| Maximum Rotation:                                               | 66.0-82.0 Deg        | 66.51 Deg           | Passed        |
| Rotation Angle Decay:                                           | 58.0-67.0 ms         | 58.10 ms            | Passed        |
| MOMENT ABOUT THE OCCIPITAL CONDYLE                              |                      |                     |               |
| Max Occipital Moment:                                           | 73.00- 88.00 N-m     | 86.67 N-m           | Passed        |
| Occipital Moment Decay:                                         | 49.0-64.0 ms         | 50.80 ms            | Passed        |
| HEAD ROTATION TIME WITH RESPECT TO THE OCCIPITAL CONDYLE MOMENT |                      |                     |               |
| Moment to Rotation Peak:                                        | 2.0-16.0 ms          | 9.10 ms             | Passed        |

# Neck Test

## Pre-Test

### CONFIGURED FOR LEFT SIDE IMPACT


ATD Serial No: 270

Date: 02-05-07


Sequential Test Number: 1 File: 270NECK2 02-05-07

Laboratory Technician: B. Swiecicki


Pend Ax  
CFC\_180  
Max: 25.8 [g's] at 0.009 [s]  
Min: -3.2 [g's] at 0.044 [s]

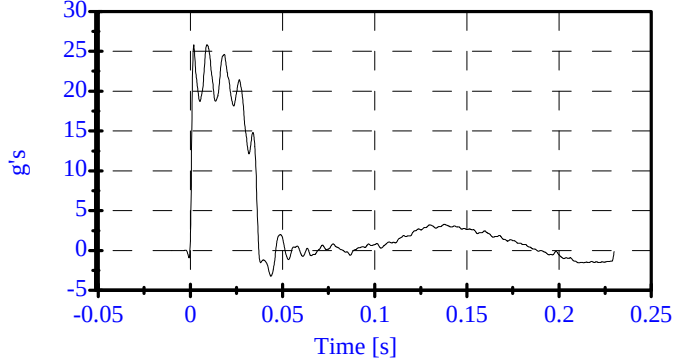


Pend Vx  
CFC\_180  
Max: 8.6 [m/s] at 0.188 [s]  
Min: -0.0 [m/s] at -0.000 [s]

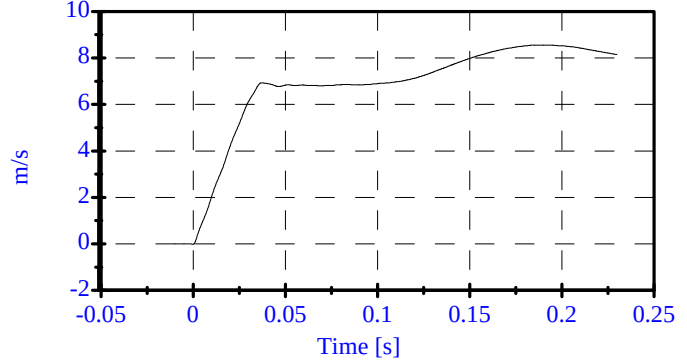


Head Rot  
CFC\_180  
Max: 39.1 [degrees] at 0.053 [s]  
Min: -13.2 [degrees] at 0.144 [s]

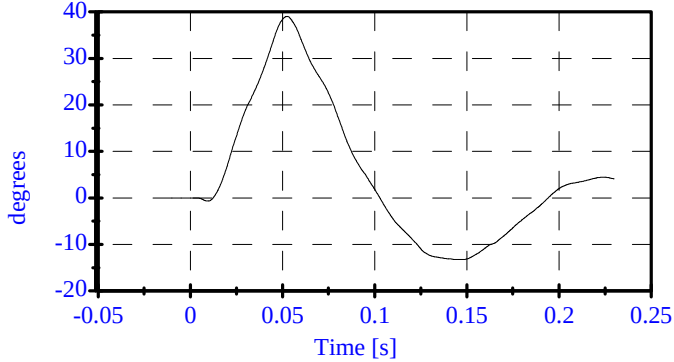


Arm Rot  
CFC\_180  
Max: 34.6 [degrees] at 0.067 [s]  
Min: -13.8 [degrees] at 0.160 [s]

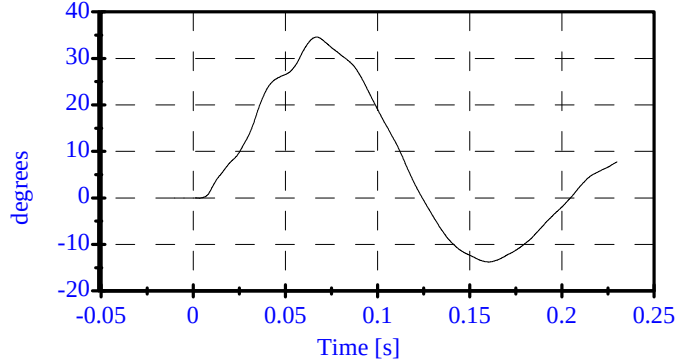


Neck Mx  
CFC\_600  
Max: 71.6 [N-m] at 0.049 [s]  
Min: -22.6 [N-m] at 0.011 [s]

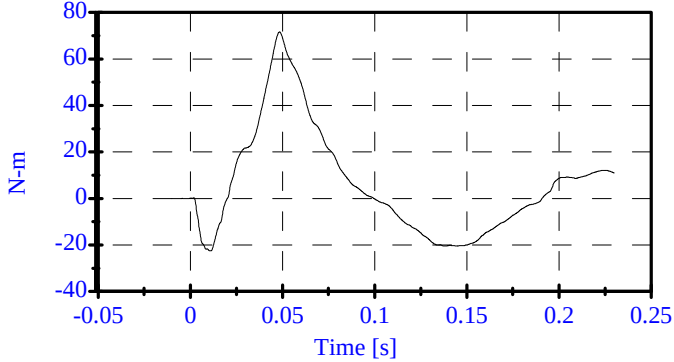


Neck Fy  
CFC\_1000  
Max: 892.6 [N] at 0.043 [s]  
Min: -284.2 [N] at 0.141 [s]

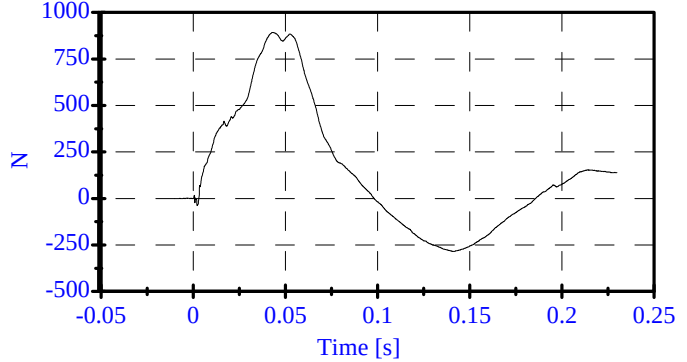

Tot Rot  
CFC\_180  
Max: 66.5 [degrees] at 0.057 [s]  
Min: -25.5 [degrees] at 0.151 [s]

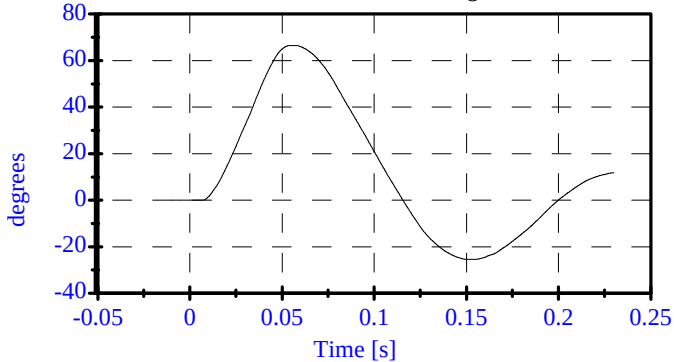

MOCX  
Max: 86.7 [N-m] at 0.048 [s]  
Min: -25.4 [N-m] at 0.138 [s]

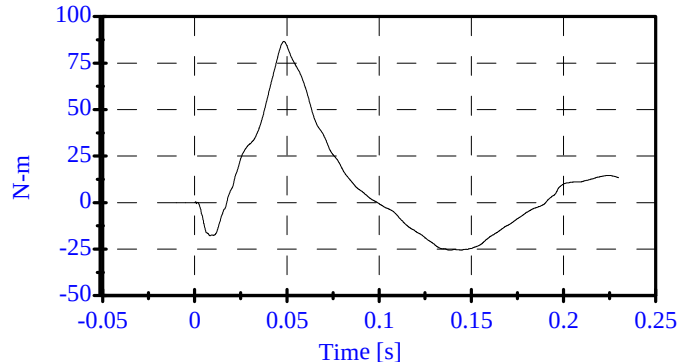

## Abdomen Test

### Pre-Test

#### CONFIGURED FOR LEFT SIDE IMPACT

ATD Serial No: 270



Date: 02-07-07

Sequential Test Number: 1 File: 270ab 02-07-07

Laboratory Technician: B. Swiecicki

| TEST PARAMETER      | SPECIFICATION   | TEST RESULTS | STATUS |
|---------------------|-----------------|--------------|--------|
| Lab Temperature:    | 18.9-25.5 C     | 21.1 C       | Passed |
| Lab Humidity:       | 10-70 %         | 31.00 %      | Passed |
| Force at 12.95 mm : | 104.00-162.00 N | 116.79 N     | Passed |
| Force at 19.05 mm : | 162.98-220.99 N | 179.14 N     | Passed |
| Force at 25.40 mm : | 221.97-280.02 N | 252.72 N     | Passed |
| Force at 33.02 mm : | 324.99-391.00 N | 355.31 N     | Passed |

### ABDOMINAL COMPRESSION TEST

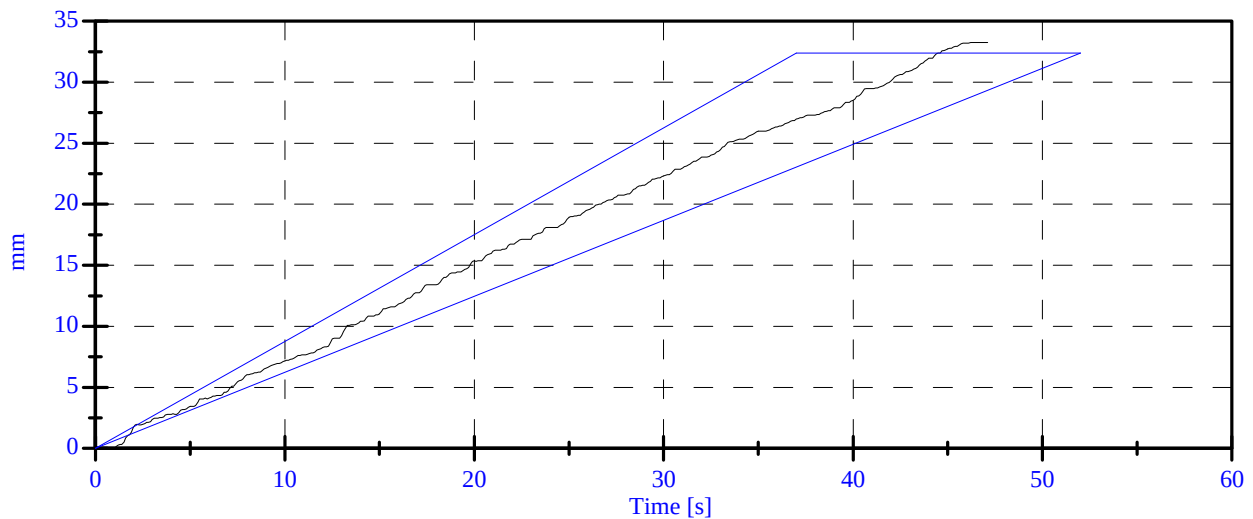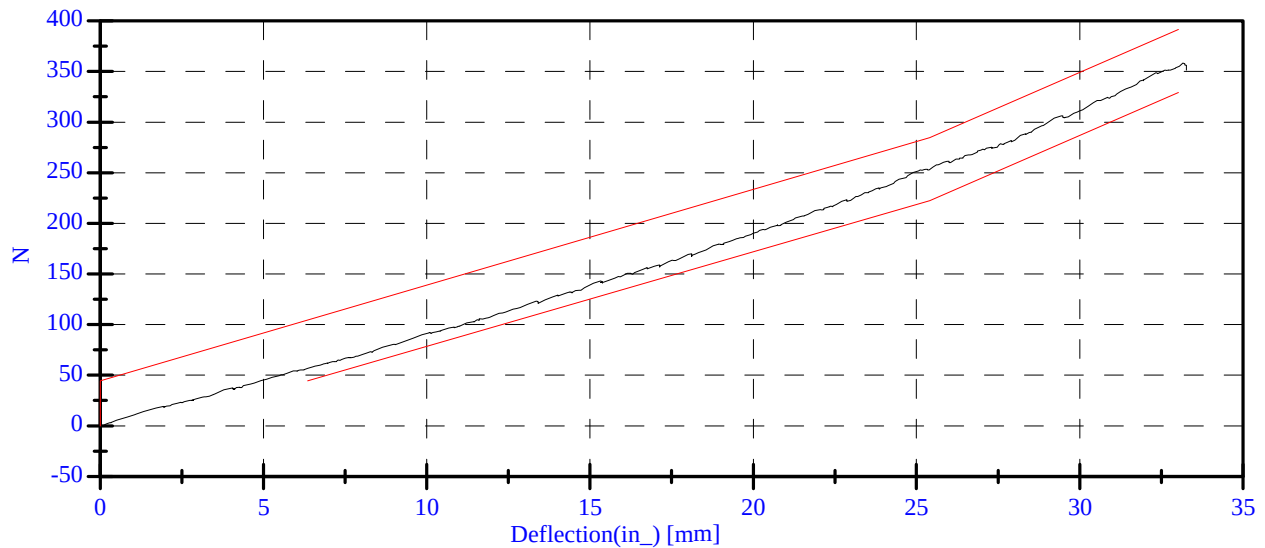





**Lumbar Spine  
Pre-Test  
CONFIGURED FOR LEFT SIDE IMPACT**

ATD Serial No: 270  
Date: 02-07-07

Sequential Test Number: 1 File: 270sp 02-07-07  
Laboratory Technician: B. Swiecicki

| TEST PARAMETER   | SPECIFICATION   | TEST RESULTS | STATUS |
|------------------|-----------------|--------------|--------|
| Lab Temperature: | 18.9-25.5 C     | 21.1 C       | Passed |
| Lab Humidity:    | 10-70 %         | 31.00 %      | Passed |
| Force at 0 Deg:  | 0.00-26.69 N    | 0.40 N       | Passed |
| Force at 20 Deg: | 97.86-151.24 N  | 111.39 N     | Passed |
| Force at 30 Deg  | 151.24-204.62 N | 160.22 N     | Passed |
| Force at 40 Deg  | 204.62-258.00 N | 215.33 N     | Passed |
| Return Angle     | 12 Deg Max      | 3.20 deg     | Passed |

**LUMBAR SPINE FLEXION TEST**

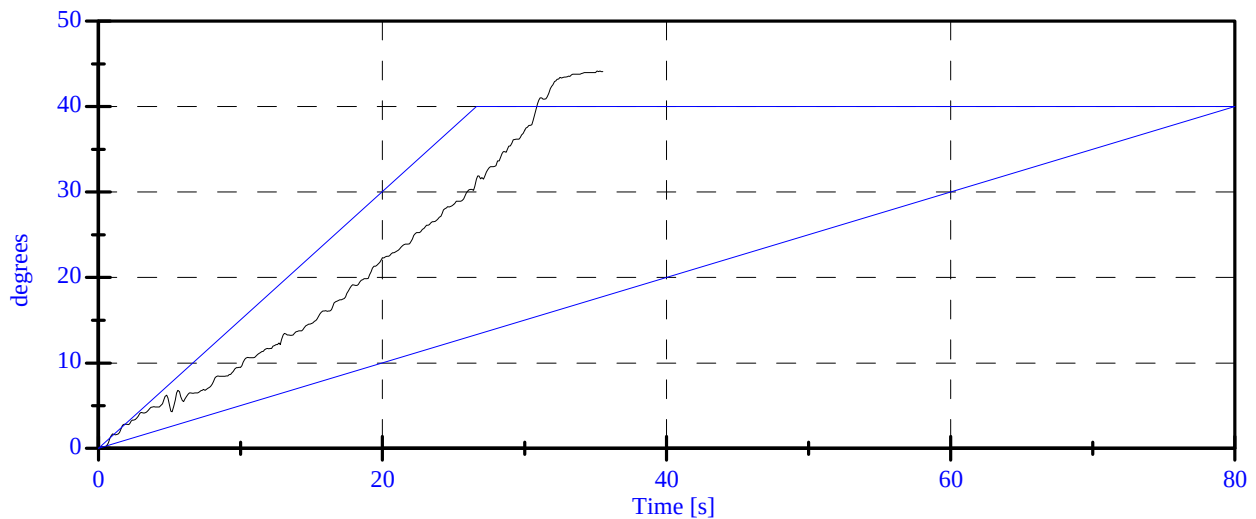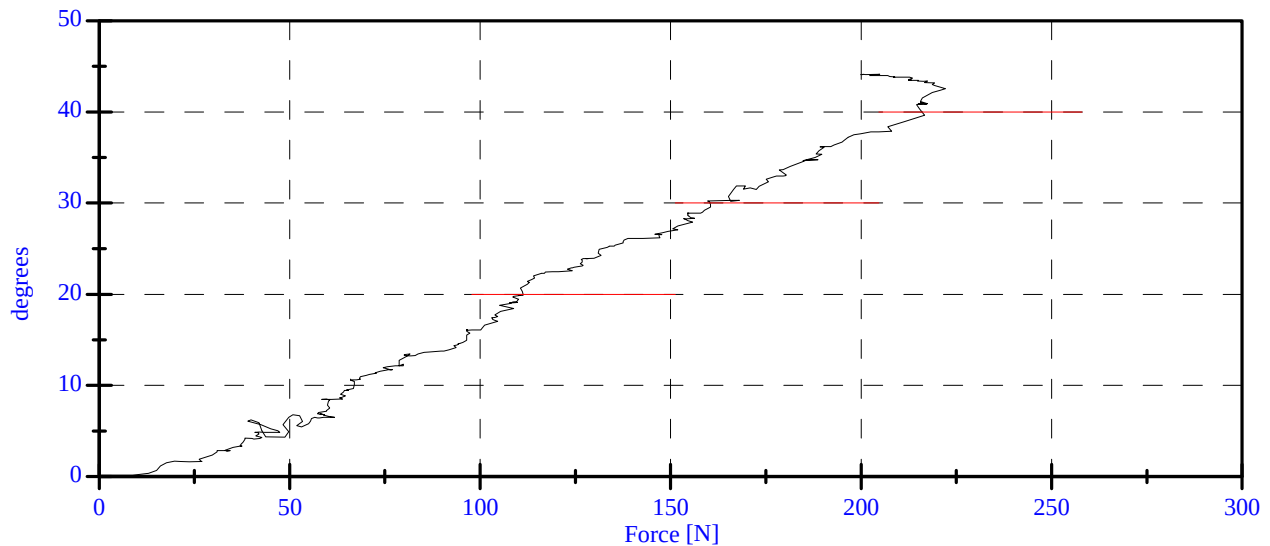

**PRE-TEST DUMMY INSPECTION LIST**  
**CONFIGURED FOR LEFT SIDE IMPACT**

SID H3 Serial No.: 270 Sequential Test Number: 3  
Date: 2/07/07 Laboratory Technician: B. Swiecicki

| PART         | ITEMS CHECKED                                     | COMMENTS |
|--------------|---------------------------------------------------|----------|
| SKIN         | VISUAL INSPECTION                                 | OK       |
| HEAD         | VISUAL, BALLAST,<br>ACCELEROMETER MOUNT           | OK       |
| NECK         | VISUAL, CABLE TORQUE                              | OK       |
| SPINE BOX    | VISUAL, BALLAST, WELDMENT,<br>ACCELEROMETER MOUNT | OK       |
| RIB CAGE     | VISUAL, MEASURE, STIFFENERS                       | OK       |
| STERNUM      | VISUAL                                            | OK       |
| LUMBAR SPINE | VISUAL                                            | OK       |
| ABDOMEN      | VISUAL                                            | OK       |
| PELVIS       | VISUAL, PALPATE,<br>ACCELEROMETER MOUNT           | OK       |
| UPPER LEGS   | VISUAL                                            | OK       |
| KNEES        | VISUAL, STOPS, INSERTS                            | OK       |
| LOWER LEGS   | VISUAL, RANGE OF MOTION                           | OK       |
| ANKLES       | VISUAL, RANGE OF MOTION                           | OK       |
| FEET         | VISUAL, RANGE OF MOTION                           | OK       |
| JOINTS       | 1 TO 2 g RANGE                                    | OK       |
| OTHER        | NONE                                              | -        |

**REMARKS:** None

**CALIBRATION TEST RESULTS**

**POST TEST**

**SID H3 NO.:** 269

**CONFIGURED FOR LEFT SIDE IMPACT**

**CALIBRATION TEST RESULTS SUMMARY  
POST TEST**

**CONFIGURED FOR LEFT SIDE IMPACT**

|                        |                                     |
|------------------------|-------------------------------------|
| SID H3 Serial No.: 269 | Sequential Test Number: 4           |
| Date: 2/19/07          | Laboratory Technician: B. Swiecicki |

| TEST                        | COMMENTS                 |
|-----------------------------|--------------------------|
| EXTERNAL DIMENSIONS         | Passed all requirements. |
| LATERAL THORAX IMPACT TEST  | Passed all requirements. |
| LATERAL PELVIS IMPACT TEST  | Passed all requirements. |
| HEAD DROP TEST*             | Passed all requirements. |
| LATERAL NECK BEND TEST*     | Passed all requirements. |
| ABDOMINAL COMPRESSION TEST* | Passed all requirements. |
| LUMBAR FLEXION TEST*        | Passed all requirements. |

\* Test not required for SID certification.

**REMARKS:** None

**EXTERNAL DIMENSIONS  
POST TEST**

**CONFIGURED FOR LEFT SIDE IMPACT**

|                        |                                     |
|------------------------|-------------------------------------|
| SID H3 Serial No.: 269 | Sequential Test Number: 4           |
| Date: 2/19/07          | Laboratory Technician: B. Swiecicki |

| TEST PARAMETER                     | SPECIFICATION | TEST RESULTS |
|------------------------------------|---------------|--------------|
| SH- Seated Height (mm)             | 889 - 909     | 899          |
| RH- Rib Height (mm)                | 502 - 520     | 505          |
| HP- Hip Pivot Height (mm)          | 99 ref.       | 99           |
| RD- Rib from Back Line (mm)        | 229 - 241     | 234          |
| KH- Knee Pivot from Back Line (mm) | 511 - 526     | 518          |
| KV- Knee Pivot to Floor (mm)       | 490 - 505     | 492          |
| HW- Hip Width (mm)                 | 356 - 391     | 384          |

**REMARKS:** None

# Thorax Impact

## Post-Test

### CONFIGURED FOR LEFT SIDE IMPACT







ATD Serial No: 269

Date: 02-16-07

Sequential Test Number: 1 File: 269T 02-16-07

Laboratory Technician: B. Swiecicki

| TEST PARAMETER            | SPECIFICATION   | TEST RESULTS | STATUS |
|---------------------------|-----------------|--------------|--------|
| Lab Temperature:          | 18.9-25.5 C     | 21.1 C       | Passed |
| Lab Humidity:             | 10-70 %         | 38.00 %      | Passed |
| Probe Velocity:           | 4.27- 4.33 m/s  | 4.32 m/s     | Passed |
| Upper Rib Acceleration:   | 37.00-46.00 G's | 41.29 G's    | Passed |
| Lower Rib Acceleration:   | 37.00-46.00 G's | 41.90 G's    | Passed |
| Lower Spine Acceleration: | 15.00-22.00 G's | 19.01 G's    | Passed |

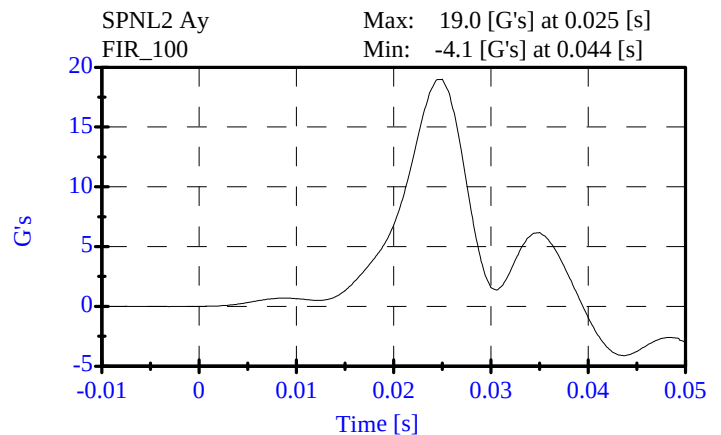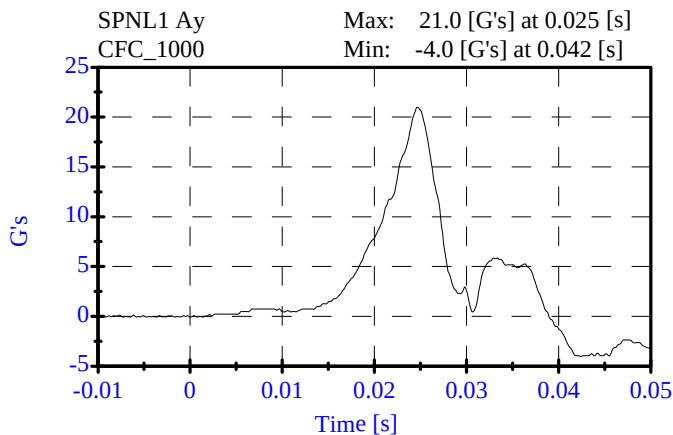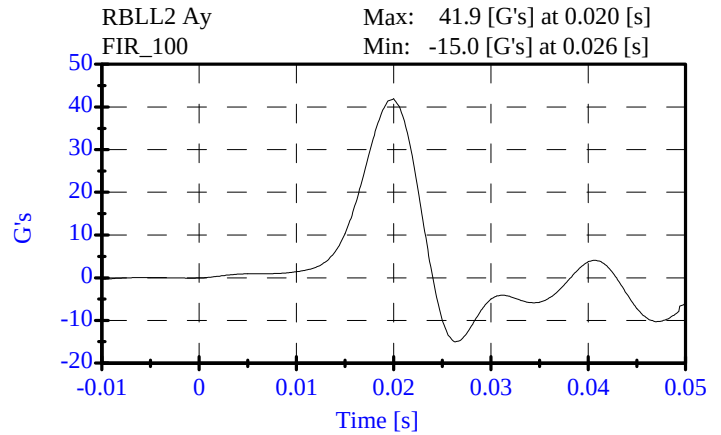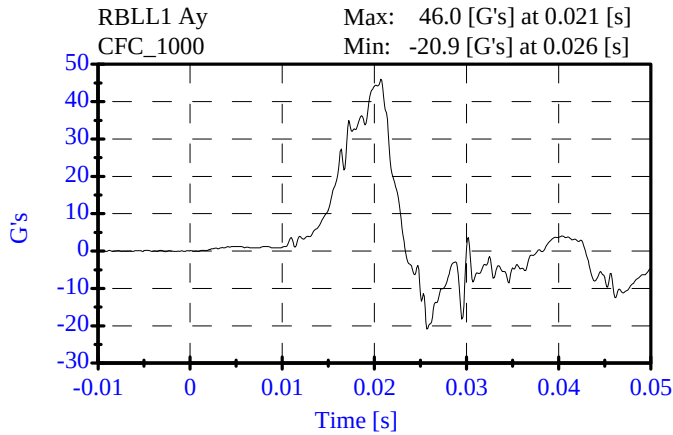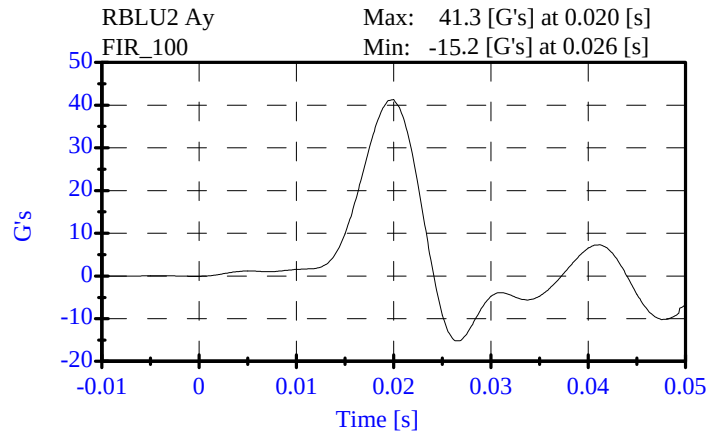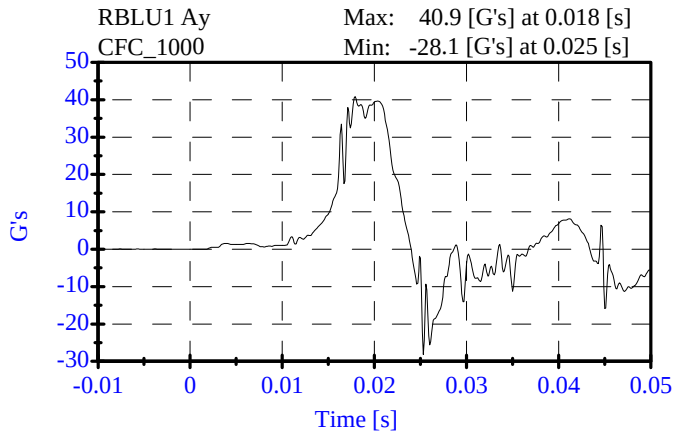



## Pelvic Impact

### Post-Test

#### CONFIGURED FOR LEFT SIDE IMPACT



ATD Serial No: 269

Date: 02-16-07

Sequential Test Number: 1 File: 269P 02-16-07

Laboratory Technician: B. Swiecicki

| TEST PARAMETER         | SPECIFICATION   | TEST RESULTS | STATUS |
|------------------------|-----------------|--------------|--------|
| Lab Temperature:       | 18.9-25.5 C     | 21.1 C       | Passed |
| Lab Humidity:          | 10-70 %         | 38.00 %      | Passed |
| Probe Velocity:        | 4.27- 4.33 m/s  | 4.32 m/s     | Passed |
| Pelvis Y Acceleration: | 40.00-60.00 G's | 56.23 G's    | Passed |
| Time Above 20 Gs       | 3.0-7.0 ms      | 5.5 ms       | Passed |

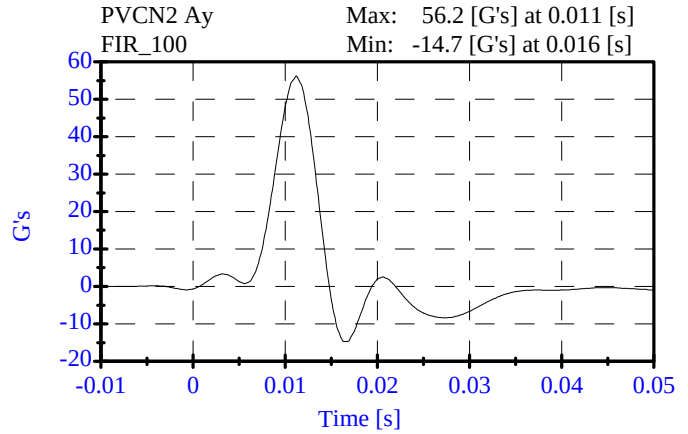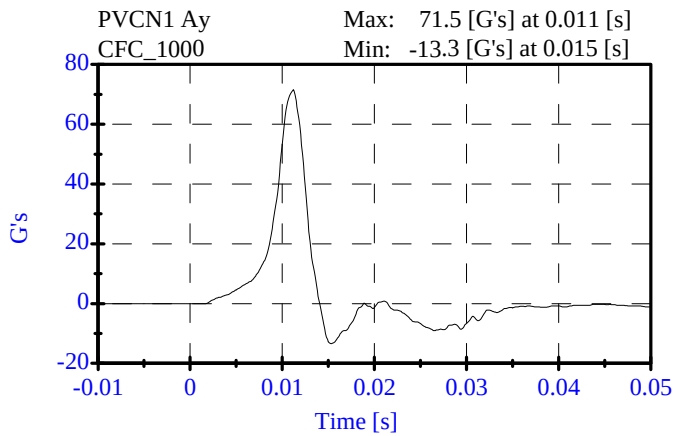





# **Head Drop** **Post-Test**

## **CONFIGURED FOR LEFT SIDE IMPACT**

ATD Serial No: 269  
Date: 02-15-07

Sequential Test Number: 1    File: 269H 02-15-07  
Laboratory Technician: B. Swiecicki

| TEST PARAMETER          | SPECIFICATION | TEST RESULTS | STATUS |
|-------------------------|---------------|--------------|--------|
| Lab Temperature:        | 18.9-25.6 C   | 21.1 C       | Passed |
| Lab Humidity:           | 10-70 %       | 32.00 %      | Passed |
| Peak Resultant Accel.:  | 120-150 Gs    | 144.05 Gs    | Passed |
| Peak Lateral Accel.:    | 15 Gs Max     | 3.17 Gs      | Passed |
| Curve PerCent NonModal: | < 15%         | 2.24 %       | Passed |

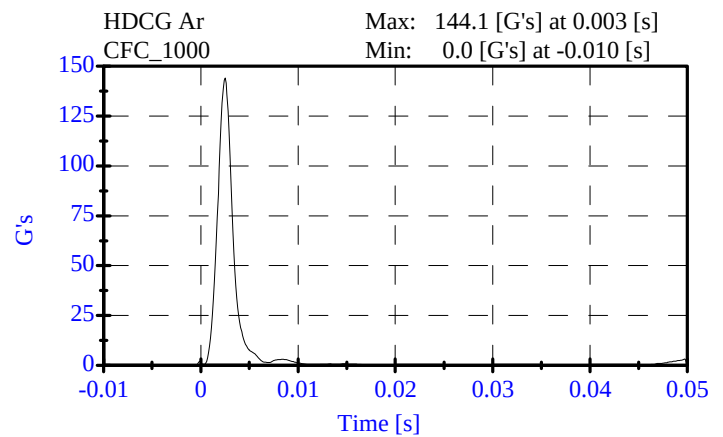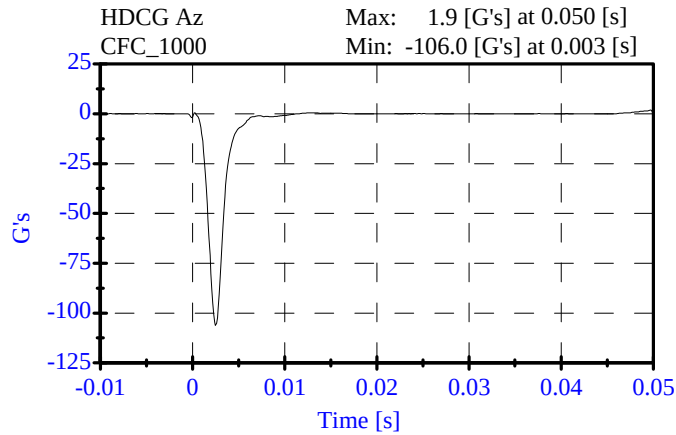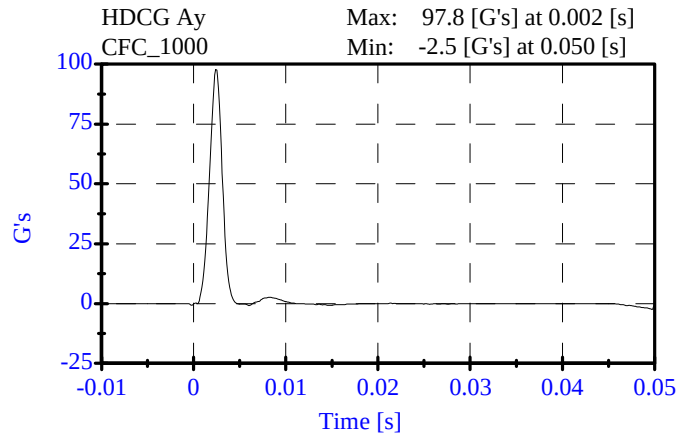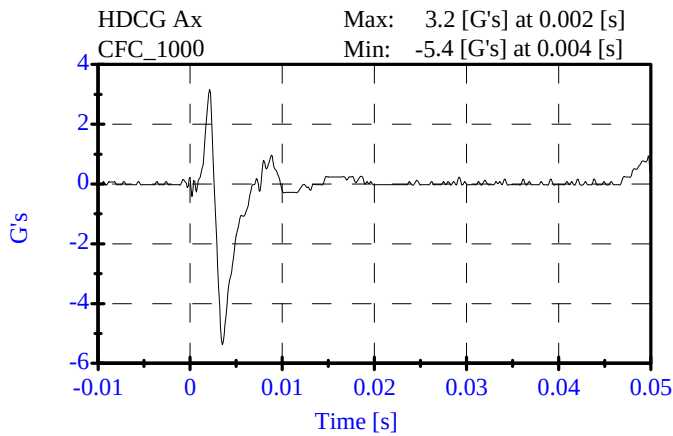

**Neck Test****Post-Test****CONFIGURED FOR LEFT SIDE IMPACT**

ATD Serial No: 269

Date: 02-15-07

Sequential Test Number: 1 File: 269N 02-15-07

Laboratory Technician: B. Swiecicki

| <u>TEST PARAMETER</u>                                           | <u>SPECIFICATION</u> | <u>TEST RESULTS</u> | <u>STATUS</u> |
|-----------------------------------------------------------------|----------------------|---------------------|---------------|
| Lab Temperature:                                                | 20.6-22.2 C          | 21.1 C              | Passed        |
| Lab Humidity:                                                   | 10-70 %              | 32.00 %             | Passed        |
| Impact Velocity:                                                | 6.89- 7.13 m/s       | 6.99 m/s            | Passed        |
| PENDULUM DELTA V                                                |                      |                     |               |
| Delta V at 10 ms:                                               | 1.96- 2.55 m/s       | 2.11 m/s            | Passed        |
| Delta V at 20 ms:                                               | 4.12- 5.10 m/s       | 4.35 m/s            | Passed        |
| Delta V at 30 ms:                                               | 5.73- 7.01 m/s       | 6.32 m/s            | Passed        |
| Delta V between 40-70 ms:                                       | 6.27- 7.64 m/s       | 7.13 m/s            | Passed        |
| D PLANE ROTATION                                                |                      |                     |               |
| Maximum Rotation:                                               | 66.0-82.0 Deg        | 67.93 Deg           | Passed        |
| Rotation Angle Decay:                                           | 58.0-67.0 ms         | 60.60 ms            | Passed        |
| MOMENT ABOUT THE OCCIPITAL CONDYLE                              |                      |                     |               |
| Max Occipital Moment:                                           | 73.00- 88.00 N-m     | 81.91 N-m           | Passed        |
| Occipital Moment Decay:                                         | 49.0-64.0 ms         | 53.80 ms            | Passed        |
| HEAD ROTATION TIME WITH RESPECT TO THE OCCIPITAL CONDYLE MOMENT |                      |                     |               |
| Moment to Rotation Peak:                                        | 2.0-16.0 ms          | 8.80 ms             | Passed        |

## Neck Test

### Post-Test

#### CONFIGURED FOR LEFT SIDE IMPACT


ATD Serial No: 269

Date: 02-15-07


Sequential Test Number: 1 File: 269N 02-15-07

Laboratory Technician: B. Swiecicki


Pend Ax  
CFC\_180  
Max: 27.1 [g's] at 0.002 [s]  
Min: -3.9 [g's] at 0.041 [s]

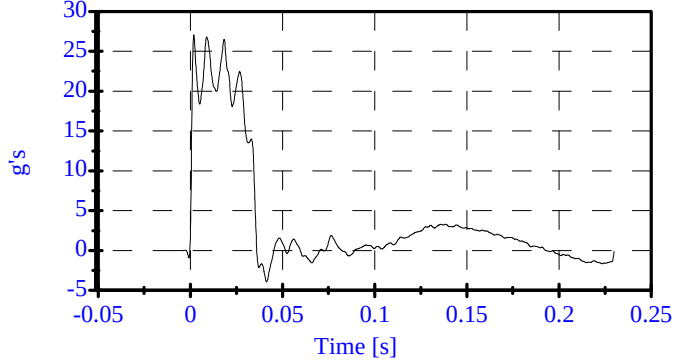


Pend Vx  
CFC\_180  
Max: 8.7 [m/s] at 0.193 [s]  
Min: -0.0 [m/s] at -0.000 [s]

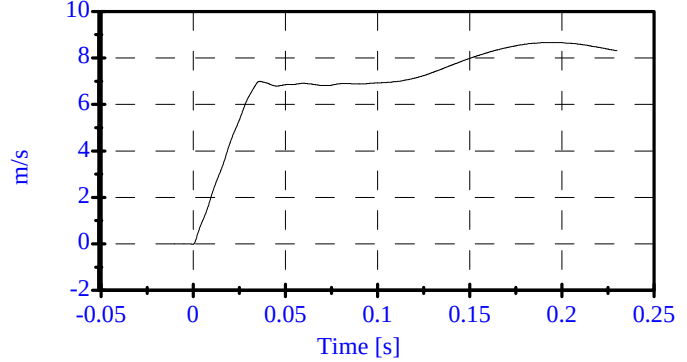


Head Rot  
CFC\_180  
Max: 37.7 [degrees] at 0.053 [s]  
Min: -13.5 [degrees] at 0.144 [s]

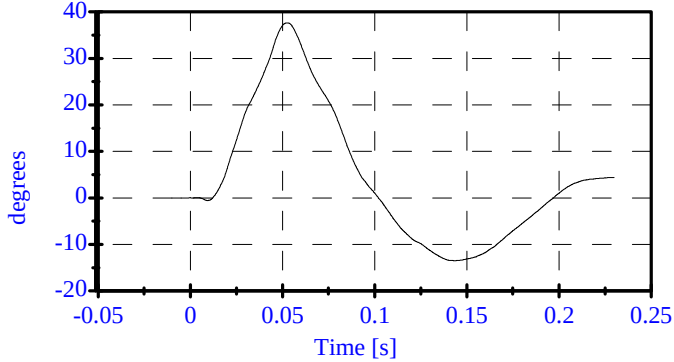


Arm Rot  
CFC\_180  
Max: 37.5 [degrees] at 0.068 [s]  
Min: -14.8 [degrees] at 0.161 [s]

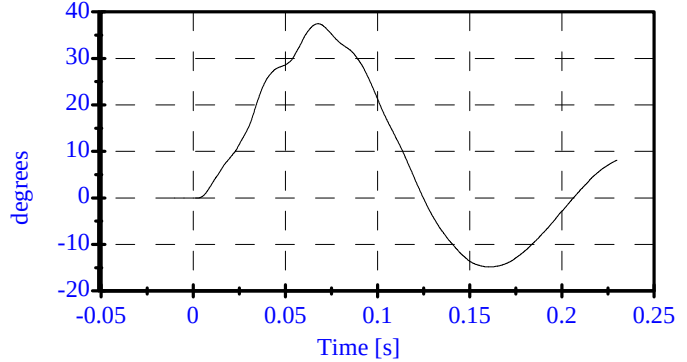


Neck Mx  
CFC\_600  
Max: 67.4 [N-m] at 0.047 [s]  
Min: -23.4 [N-m] at 0.011 [s]

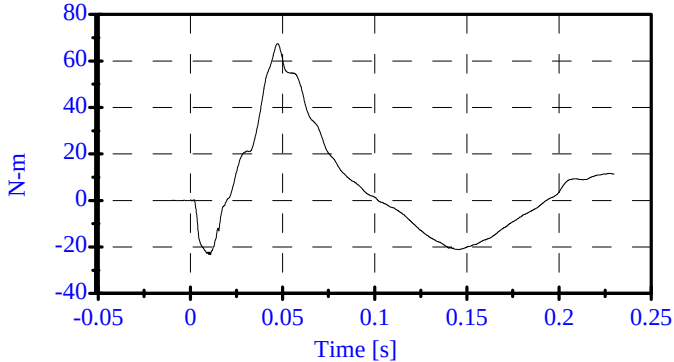


Neck Fy  
CFC\_1000  
Max: 896.2 [N] at 0.044 [s]  
Min: -261.6 [N] at 0.140 [s]

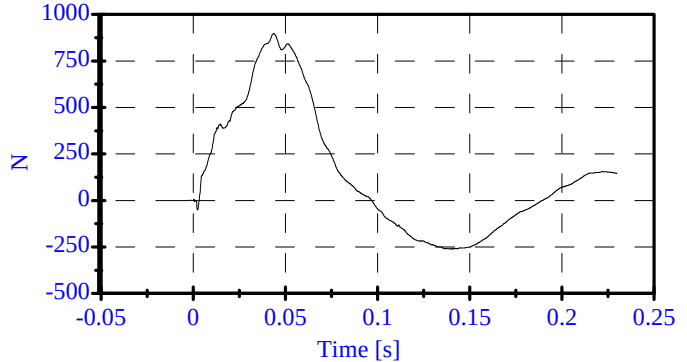

Tot Rot  
CFC\_180  
Max: 67.9 [degrees] at 0.056 [s]  
Min: -27.1 [degrees] at 0.154 [s]

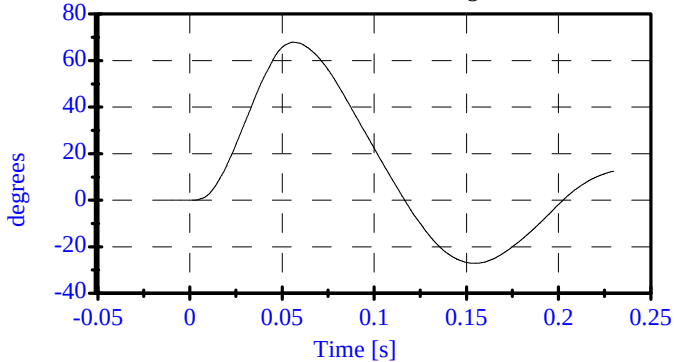

MOCX  
Max: 81.9 [N-m] at 0.047 [s]  
Min: -25.7 [N-m] at 0.145 [s]

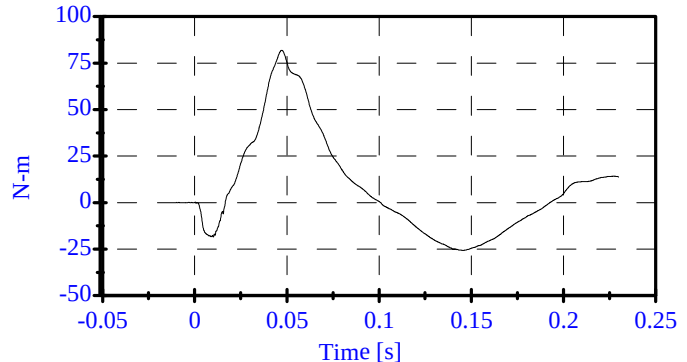

## Abdomen Test

### Post-Test

#### CONFIGURED FOR LEFT SIDE IMPACT

ATD Serial No: 269



Date: 02-19-07

Sequential Test Number: 1 File: 269 Ab 02-19-07

Laboratory Technician: B. Swiecicki

| TEST PARAMETER      | SPECIFICATION   | TEST RESULTS | STATUS |
|---------------------|-----------------|--------------|--------|
| Lab Temperature:    | 18.9-25.5 C     | 21.1 C       | Passed |
| Lab Humidity:       | 10-70 %         | 36.00 %      | Passed |
| Force at 12.95 mm : | 104.00-162.00 N | 121.50 N     | Passed |
| Force at 19.05 mm : | 162.98-220.99 N | 185.30 N     | Passed |
| Force at 25.40 mm : | 221.97-280.02 N | 255.26 N     | Passed |
| Force at 33.02 mm : | 324.99-391.00 N | 358.57 N     | Passed |

#### ABDOMINAL COMPRESSION TEST

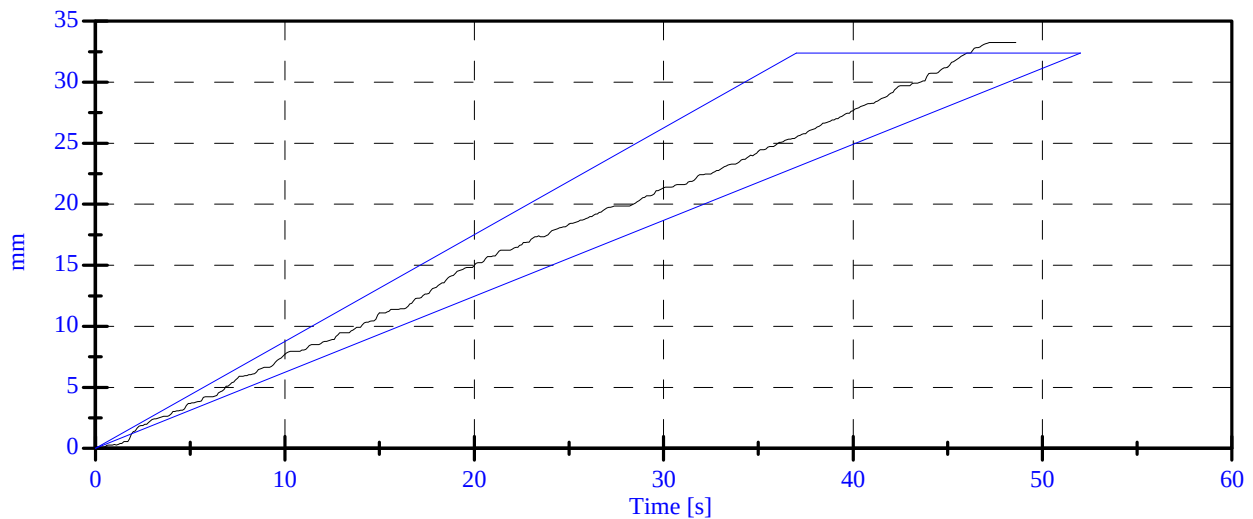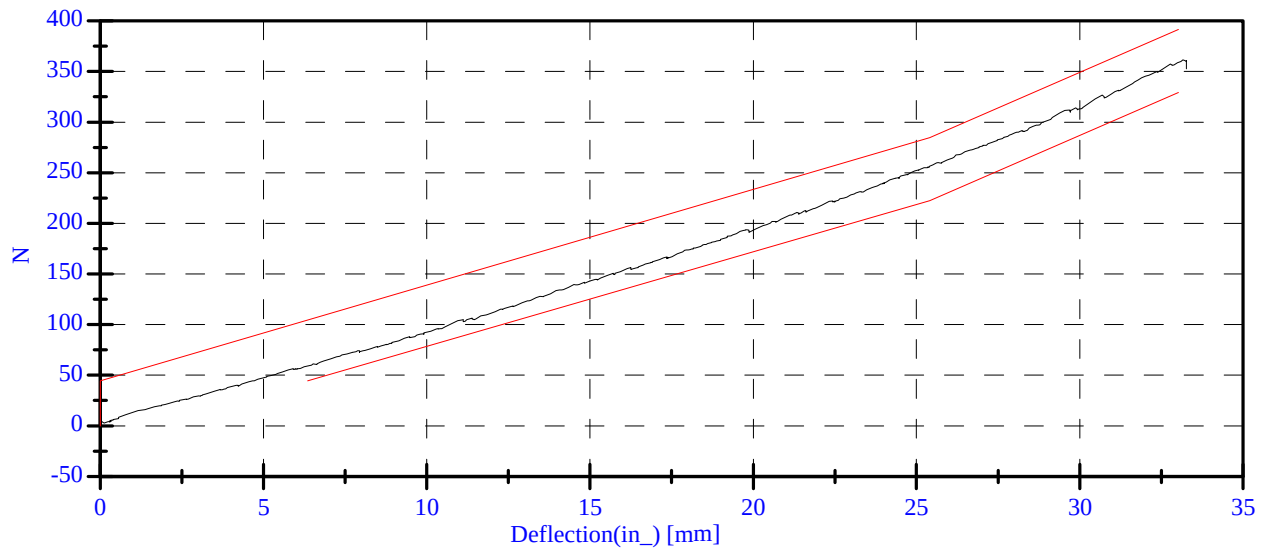

## Lumbar Spine

### Post-Test

#### CONFIGURED FOR LEFT SIDE IMPACT

ATD Serial No: 269



Date: 02-19-07

Sequential Test Number: 1 File: 269 Spine 02-19-07

Laboratory Technician: B. Swiecicki

| TEST PARAMETER   | SPECIFICATION   | TEST RESULTS | STATUS |
|------------------|-----------------|--------------|--------|
| Lab Temperature: | 18.9-25.5 C     | 21.1 C       | Passed |
| Lab Humidity:    | 10-70 %         | 36.00 %      | Passed |
| Force at 0 Deg:  | 0.00-26.69 N    | 12.93 N      | Passed |
| Force at 20 Deg: | 97.86-151.24 N  | 104.86 N     | Passed |
| Force at 30 Deg: | 151.24-204.62 N | 155.26 N     | Passed |
| Force at 40 Deg: | 204.62-258.00 N | 214.02 N     | Passed |
| Return Angle     | 12 Deg Max      | 2.13 deg     | Passed |

### LUMBAR SPINE FLEXION TEST

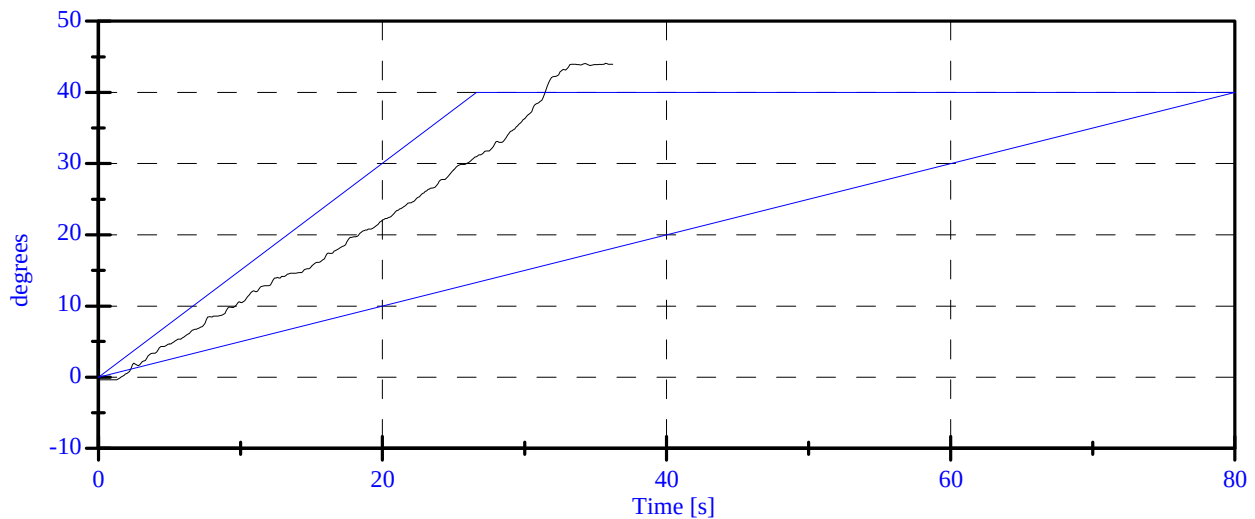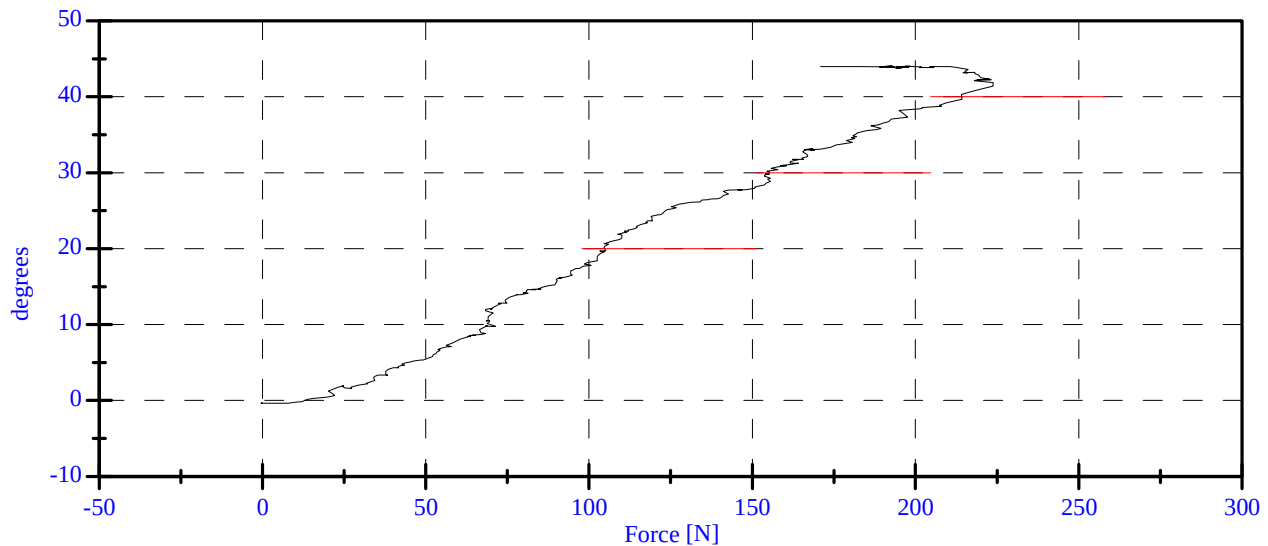



**POST TEST DUMMY INSPECTION LIST**  
**CONFIGURED FOR LEFT SIDE IMPACT**

SID H3 Serial No.: 269 Sequential Test Number: 4  
 Date: 2/19/07 Laboratory Technician: B. Swiecicki

| PART         | ITEMS CHECKED                                     | COMMENTS |
|--------------|---------------------------------------------------|----------|
| SKIN         | VISUAL INSPECTION                                 | OK       |
| HEAD         | VISUAL, BALLAST,<br>ACCELEROMETER MOUNT           | OK       |
| NECK         | VISUAL, CABLE TORQUE                              | OK       |
| SPINE BOX    | VISUAL, BALLAST, WELDMENT,<br>ACCELEROMETER MOUNT | OK       |
| RIB CAGE     | VISUAL, MEASURE, STIFFENERS                       | OK       |
| STERNUM      | VISUAL                                            | OK       |
| LUMBAR SPINE | VISUAL                                            | OK       |
| ABDOMEN      | VISUAL                                            | OK       |
| PELVIS       | VISUAL, PALPATE,<br>ACCELEROMETER MOUNT           | OK       |
| UPPER LEGS   | VISUAL                                            | OK       |
| KNEES        | VISUAL, STOPS, INSERTS                            | OK       |
| LOWER LEGS   | VISUAL, RANGE OF MOTION                           | OK       |
| ANKLES       | VISUAL, RANGE OF MOTION                           | OK       |
| FEET         | VISUAL, RANGE OF MOTION                           | OK       |
| JOINTS       | 1 TO 2 g RANGE                                    | OK       |
| OTHER        | NONE                                              | -        |

**REMARKS:** None

**CALIBRATION TEST RESULTS**

**POST TEST**

**SID H3 NO.:** 270

**CONFIGURED FOR LEFT SIDE IMPACT**

**CALIBRATION TEST RESULTS SUMMARY  
POST TEST**

**CONFIGURED FOR LEFT SIDE IMPACT**

|                        |                                     |
|------------------------|-------------------------------------|
| SID H3 Serial No.: 270 | Sequential Test Number: 4           |
| Date: 2/19/07          | Laboratory Technician: B. Swiecicki |

| TEST                        | COMMENTS                 |
|-----------------------------|--------------------------|
| EXTERNAL DIMENSIONS         | Passed all requirements. |
| LATERAL THORAX IMPACT TEST  | Passed all requirements. |
| LATERAL PELVIS IMPACT TEST  | Passed all requirements. |
| HEAD DROP TEST*             | Passed all requirements. |
| LATERAL NECK BEND TEST*     | Passed all requirements. |
| ABDOMINAL COMPRESSION TEST* | Passed all requirements. |
| LUMBAR FLEXION TEST*        | Passed all requirements. |

\* Test not required for SID certification.

**REMARKS:** None

**EXTERNAL DIMENSIONS  
POST TEST**

**CONFIGURED FOR LEFT SIDE IMPACT**

SID H3 Serial No.: 270 Sequential Test Number: 4  
Date: 2/19/07 Laboratory Technician: B. Swiecicki

| TEST PARAMETER                     | SPECIFICATION | TEST RESULTS |
|------------------------------------|---------------|--------------|
| SH- Seated Height (mm)             | 889 - 909     | 899          |
| RH- Rib Height (mm)                | 502 - 520     | 506          |
| HP- Hip Pivot Height (mm)          | 99 ref.       | 99           |
| RD- Rib from Back Line (mm)        | 229 - 241     | 233          |
| KH- Knee Pivot from Back Line (mm) | 511 - 526     | 516          |
| KV- Knee Pivot to Floor (mm)       | 490 - 505     | 495          |
| HW- Hip Width (mm)                 | 356 - 391     | 386          |







**REMARKS:** None

**Thorax Impact**  
**Post-Test**  
**CONFIGURED FOR LEFT SIDE IMPACT**

ATD Serial No: 270  
Date: 02-16-07

Sequential Test Number: 1 File: 270T1 02-16-07  
Laboratory Technician: B. Swiecicki

| TEST PARAMETER            | SPECIFICATION   | TEST RESULTS | STATUS |
|---------------------------|-----------------|--------------|--------|
| Lab Temperature:          | 18.9-25.5 C     | 21.1 C       | Passed |
| Lab Humidity:             | 10-70 %         | 38.00 %      | Passed |
| Probe Velocity:           | 4.27- 4.33 m/s  | 4.28 m/s     | Passed |
| Upper Rib Acceleration:   | 37.00-46.00 G's | 39.12 G's    | Passed |
| Lower Rib Acceleration:   | 37.00-46.00 G's | 38.13 G's    | Passed |
| Lower Spine Acceleration: | 15.00-22.00 G's | 19.20 G's    | Passed |

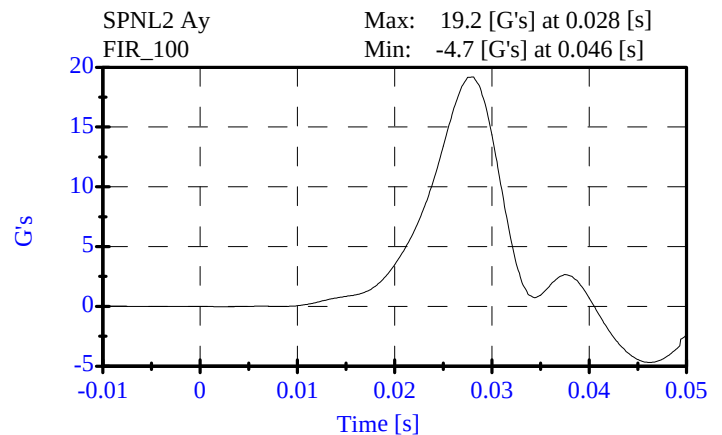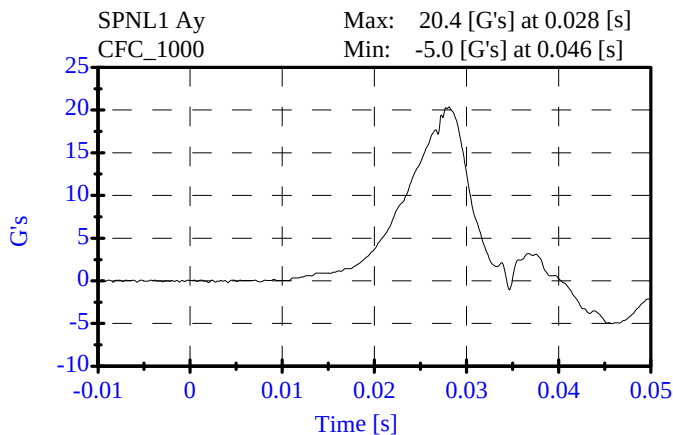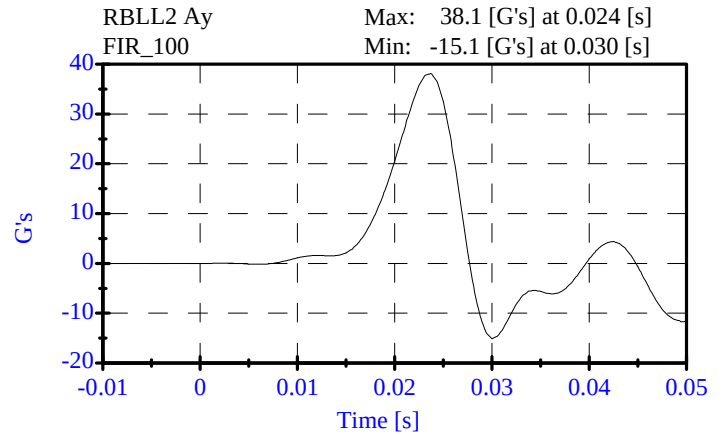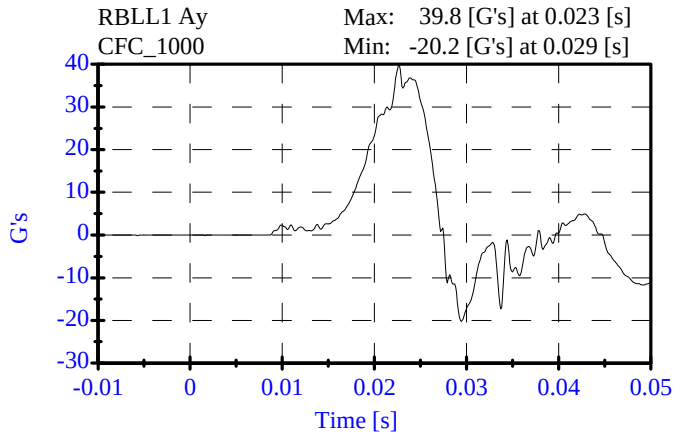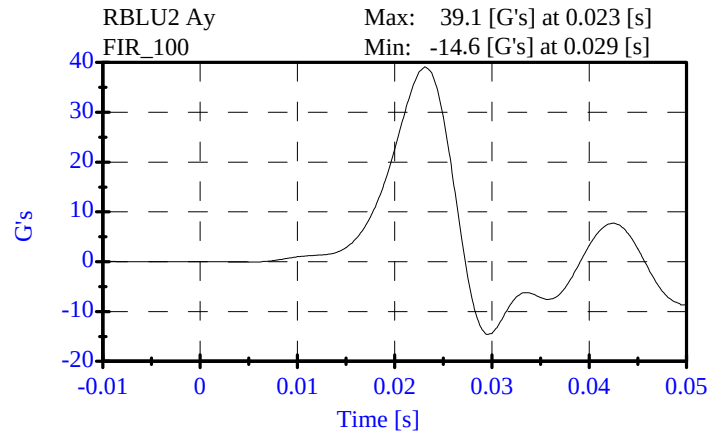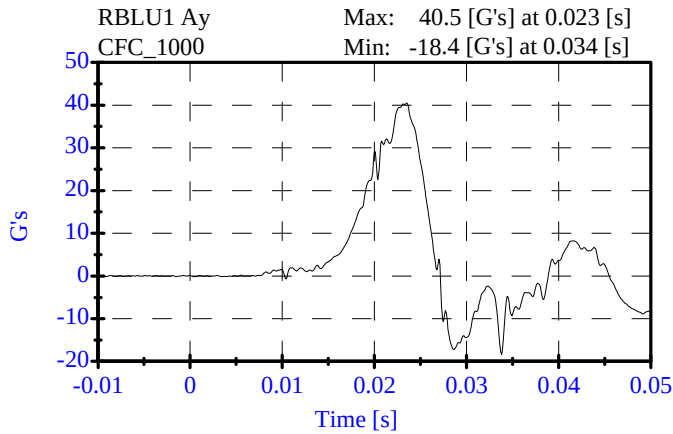

## Pelvic Impact

### Post-Test

#### CONFIGURED FOR LEFT SIDE IMPACT



ATD Serial No: 270

Date: 02-16-07

Sequential Test Number: 1 File: 270P 02-16-07

Laboratory Technician: B. Swiecicki

| TEST PARAMETER         | SPECIFICATION   | TEST RESULTS | STATUS |
|------------------------|-----------------|--------------|--------|
| Lab Temperature:       | 18.9-25.5 C     | 21.1 C       | Passed |
| Lab Humidity:          | 10-70 %         | 38.00 %      | Passed |
| Probe Velocity:        | 4.27- 4.33 m/s  | 4.33 m/s     | Passed |
| Pelvis Y Acceleration: | 40.00-60.00 G's | 42.92 G's    | Passed |
| Time Above 20 Gs       | 3.0-7.0 ms      | 5.3 ms       | Passed |

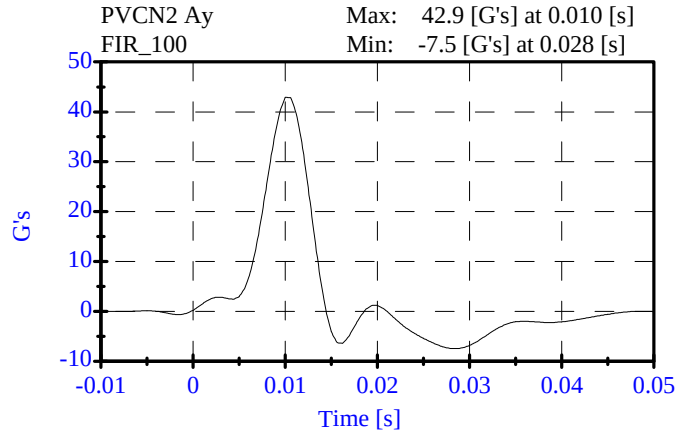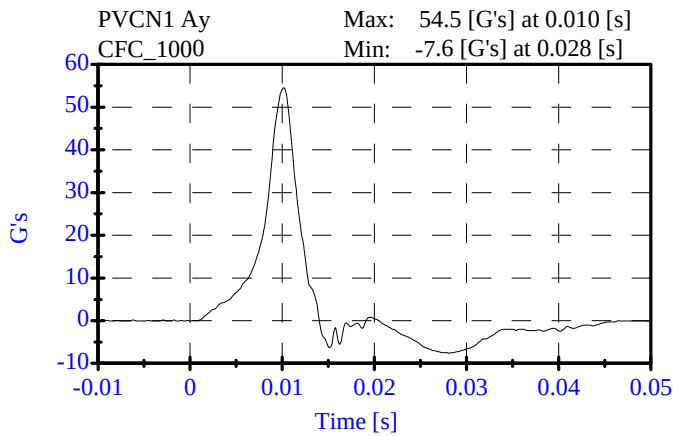







# **Head Drop** **Post-Test**

## **CONFIGURED FOR LEFT SIDE IMPACT**

ATD Serial No: 270  
Date: 02-15-07

Sequential Test Number: 1    File: 270H 02-15-07  
Laboratory Technician: B. Swiecicki

| TEST PARAMETER          | SPECIFICATION | TEST RESULTS | STATUS |
|-------------------------|---------------|--------------|--------|
| Lab Temperature:        | 18.9-25.6 C   | 21.1 C       | Passed |
| Lab Humidity:           | 10-70 %       | 32.00 %      | Passed |
| Peak Resultant Accel.:  | 120-150 Gs    | 140.60 Gs    | Passed |
| Peak Lateral Accel.:    | 15 Gs Max     | 6.21 Gs      | Passed |
| Curve PerCent NonModal: | < 15%         | 2.08 %       | Passed |

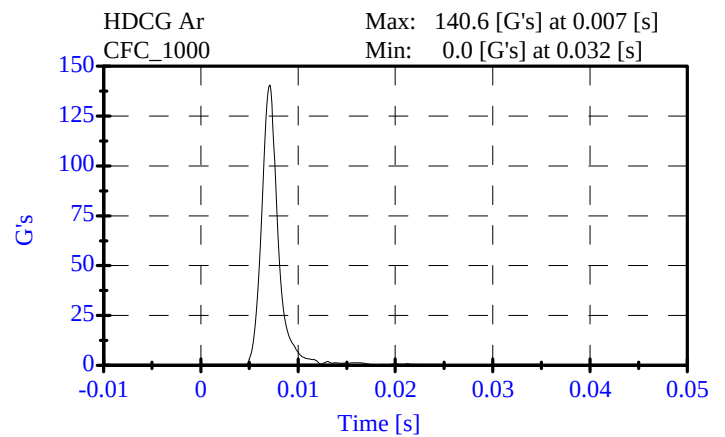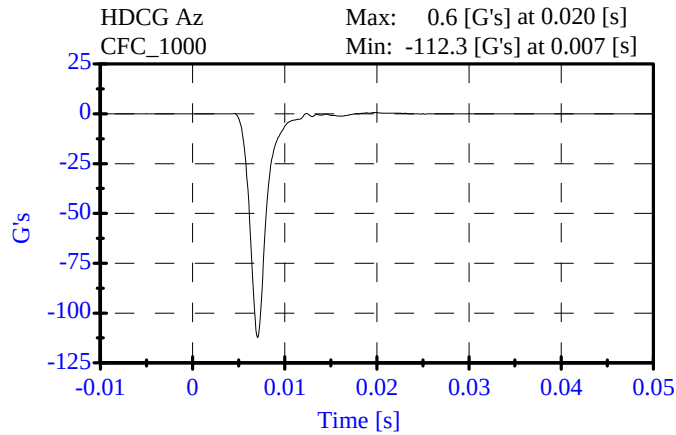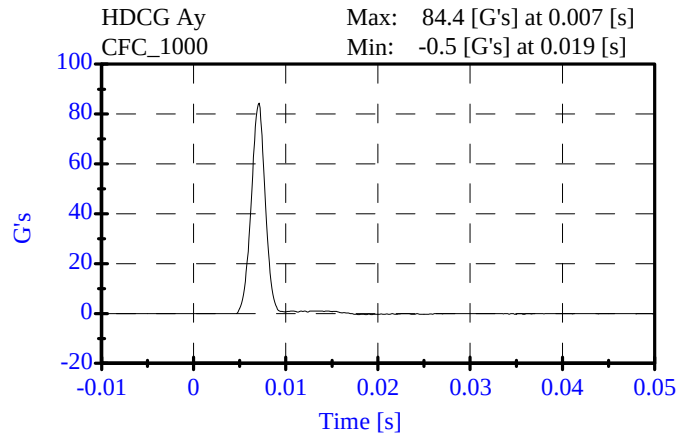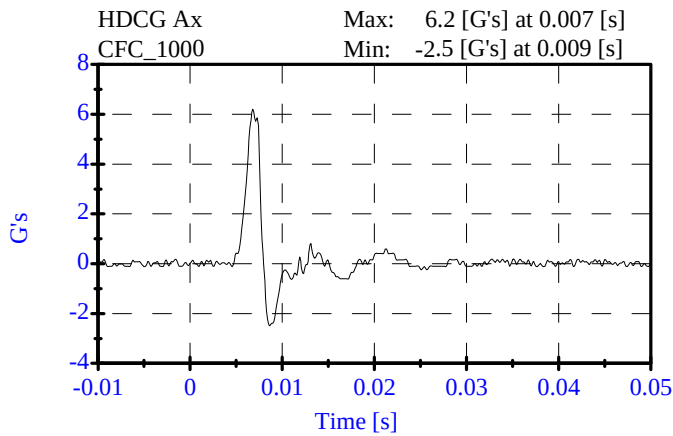

**Neck Test****Post-Test****CONFIGURED FOR LEFT SIDE IMPACT**

ATD Serial No: 270

Date: 02-15-07

Sequential Test Number: 1 File: 270N 02-15-07

Laboratory Technician: B. Swiecicki

| <u>TEST PARAMETER</u>                                           | <u>SPECIFICATION</u> | <u>TEST RESULTS</u> | <u>STATUS</u> |
|-----------------------------------------------------------------|----------------------|---------------------|---------------|
| Lab Temperature:                                                | 20.6-22.2 C          | 21.1 C              | Passed        |
| Lab Humidity:                                                   | 10-70 %              | 32.00 %             | Passed        |
| Impact Velocity:                                                | 6.89- 7.13 m/s       | 6.99 m/s            | Passed        |
| PENDULUM DELTA V                                                |                      |                     |               |
| Delta V at 10 ms:                                               | 1.96- 2.55 m/s       | 2.12 m/s            | Passed        |
| Delta V at 20 ms:                                               | 4.12- 5.10 m/s       | 4.30 m/s            | Passed        |
| Delta V at 30 ms:                                               | 5.73- 7.01 m/s       | 6.24 m/s            | Passed        |
| Delta V between 40-70 ms:                                       | 6.27- 7.64 m/s       | 7.05 m/s            | Passed        |
| D PLANE ROTATION                                                |                      |                     |               |
| Maximum Rotation:                                               | 66.0-82.0 Deg        | 66.17 Deg           | Passed        |
| Rotation Angle Decay:                                           | 58.0-67.0 ms         | 58.00 ms            | Passed        |
| MOMENT ABOUT THE OCCIPITAL CONDYLE                              |                      |                     |               |
| Max Occipital Moment:                                           | 73.00- 88.00 N-m     | 84.62 N-m           | Passed        |
| Occipital Moment Decay:                                         | 49.0-64.0 ms         | 51.70 ms            | Passed        |
| HEAD ROTATION TIME WITH RESPECT TO THE OCCIPITAL CONDYLE MOMENT |                      |                     |               |
| Moment to Rotation Peak:                                        | 2.0-16.0 ms          | 9.20 ms             | Passed        |

## Neck Test

### Post-Test

#### CONFIGURED FOR LEFT SIDE IMPACT


ATD Serial No: 270

Date: 02-15-07


Sequential Test Number: 1 File: 270N 02-15-07

Laboratory Technician: B. Swiecicki


Pend Ax  
CFC\_180  
Max: 27.9 [g's] at 0.002 [s]  
Min: -3.5 [g's] at 0.041 [s]

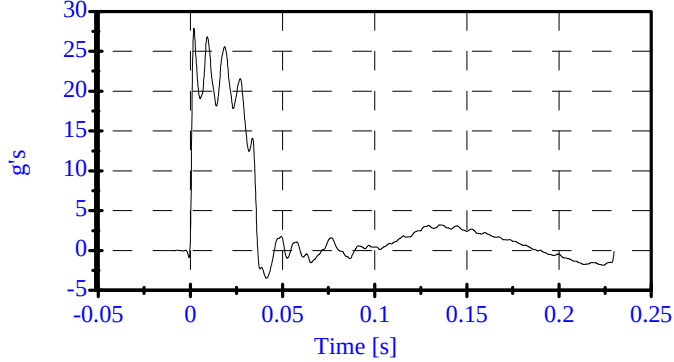


Pend Vx  
CFC\_180  
Max: 8.4 [m/s] at 0.190 [s]  
Min: -0.0 [m/s] at -0.000 [s]

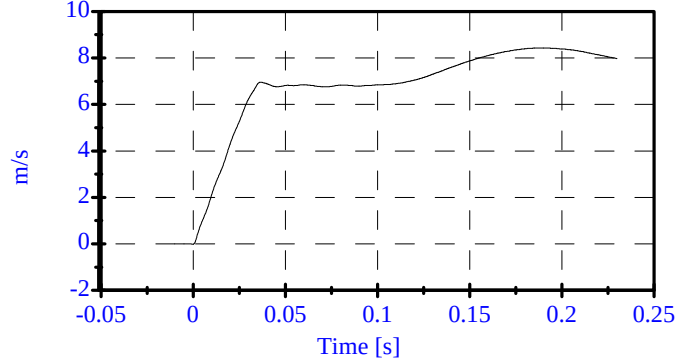


Head Rot  
CFC\_180  
Max: 36.6 [degrees] at 0.053 [s]  
Min: -13.3 [degrees] at 0.143 [s]

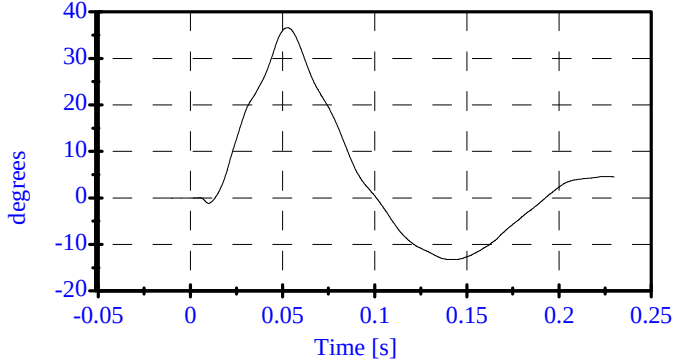


Arm Rot  
CFC\_180  
Max: 36.2 [degrees] at 0.068 [s]  
Min: -14.5 [degrees] at 0.159 [s]

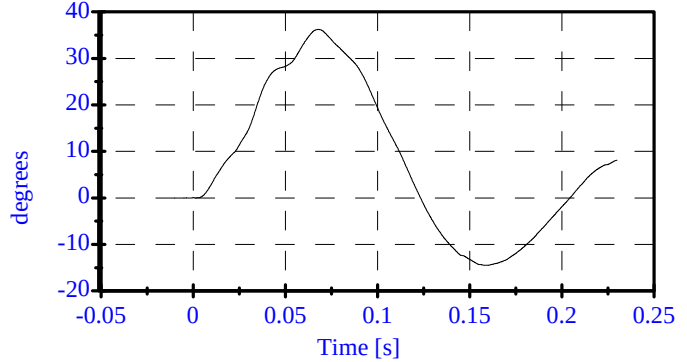


Neck Mx  
CFC\_600  
Max: 69.8 [N-m] at 0.048 [s]  
Min: -24.0 [N-m] at 0.011 [s]

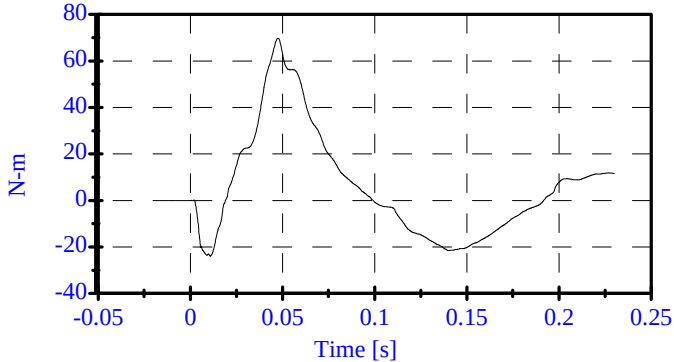


Neck Fy  
CFC\_1000  
Max: 904.0 [N] at 0.044 [s]  
Min: -288.0 [N] at 0.144 [s]

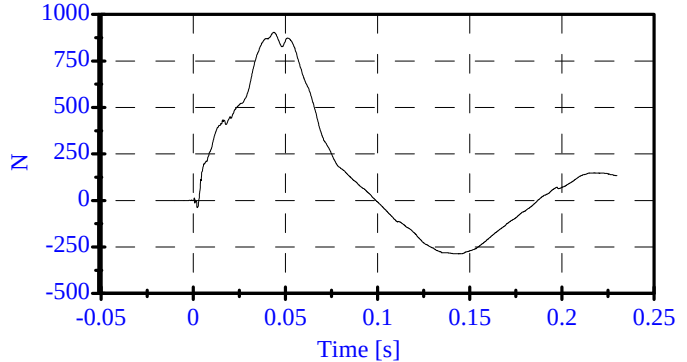

Tot Rot  
CFC\_180  
Max: 66.2 [degrees] at 0.057 [s]  
Min: -26.1 [degrees] at 0.154 [s]

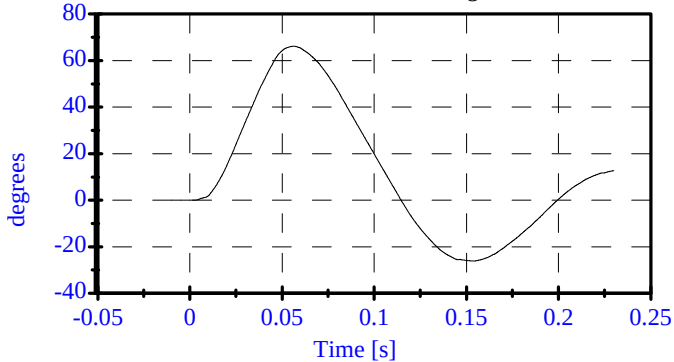

MOCX  
Max: 84.6 [N-m] at 0.047 [s]  
Min: -26.7 [N-m] at 0.140 [s]

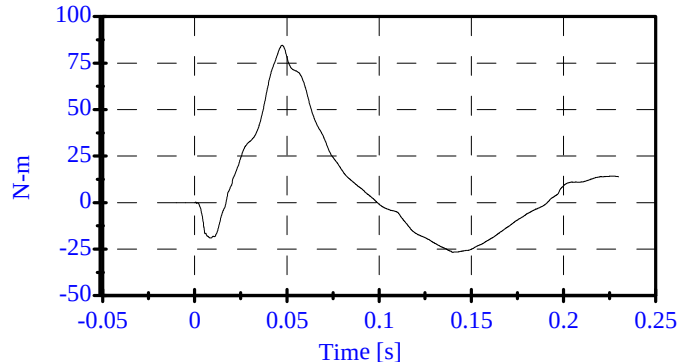

## Abdomen Test

### Post-Test

#### CONFIGURED FOR LEFT SIDE IMPACT

ATD Serial No: 270



Date: 02-19-07

Sequential Test Number: 1 File: 270 Ab 02-19-07

Laboratory Technician: B. Swiecicki

| TEST PARAMETER      | SPECIFICATION   | TEST RESULTS | STATUS |
|---------------------|-----------------|--------------|--------|
| Lab Temperature:    | 18.9-25.5 C     | 21.1 C       | Passed |
| Lab Humidity:       | 10-70 %         | 36.00 %      | Passed |
| Force at 12.95 mm : | 104.00-162.00 N | 119.69 N     | Passed |
| Force at 19.05 mm : | 162.98-220.99 N | 186.75 N     | Passed |
| Force at 25.40 mm : | 221.97-280.02 N | 261.06 N     | Passed |
| Force at 33.02 mm : | 324.99-391.00 N | 372.34 N     | Passed |

#### ABDOMINAL COMPRESSION TEST

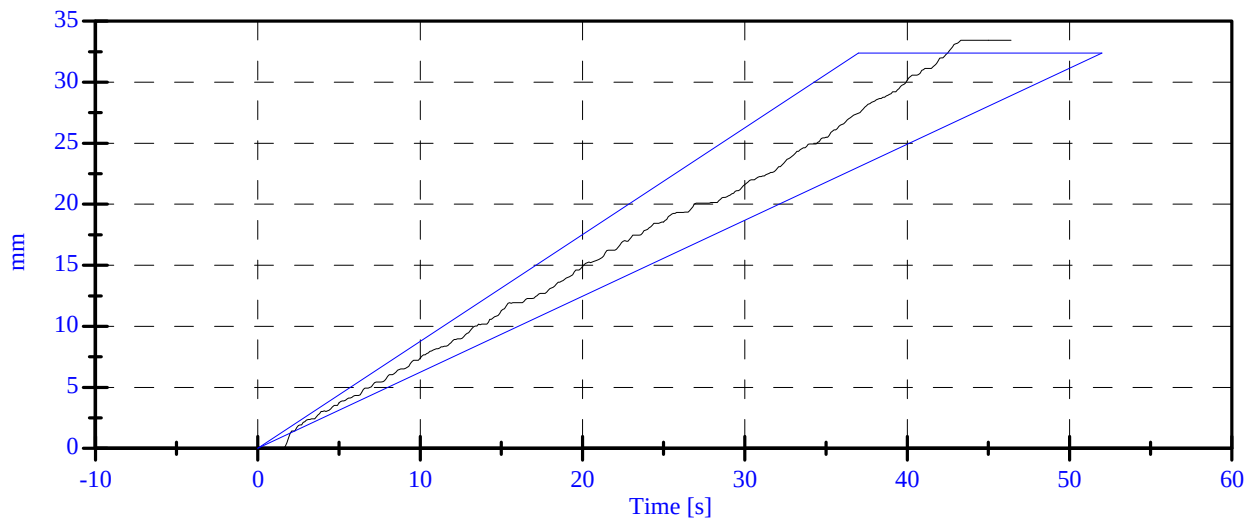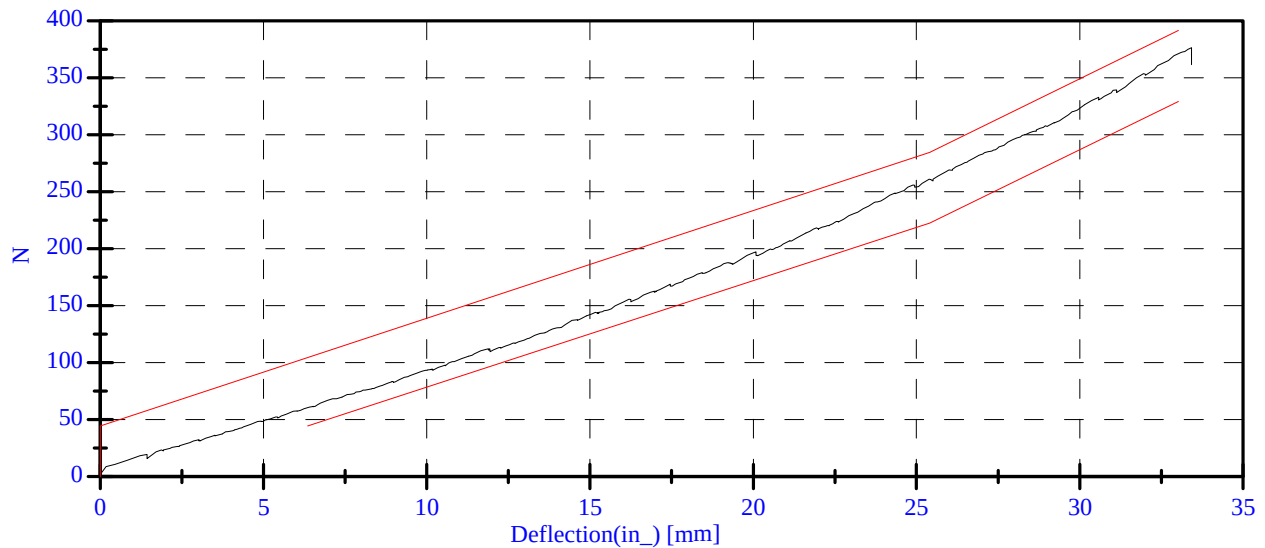

## Lumbar Spine

### Post-Test

#### CONFIGURED FOR LEFT SIDE IMPACT

ATD Serial No: 270



Date: 02-19-07

Sequential Test Number: 1 File: 270 Spine 02-19-07

Laboratory Technician: B. Swiecicki

| TEST PARAMETER   | SPECIFICATION   | TEST RESULTS | STATUS |
|------------------|-----------------|--------------|--------|
| Lab Temperature: | 18.9-25.5 C     | 21.1 C       | Passed |
| Lab Humidity:    | 10-70 %         | 36.00 %      | Passed |
| Force at 0 Deg:  | 0.00-26.69 N    | 0.40 N       | Passed |
| Force at 20 Deg: | 97.86-151.24 N  | 103.55 N     | Passed |
| Force at 30 Deg: | 151.24-204.62 N | 159.96 N     | Passed |
| Force at 40 Deg: | 204.62-258.00 N | 222.38 N     | Passed |
| Return Angle     | 12 Deg Max      | 4.57 deg     | Passed |

### LUMBAR SPINE FLEXION TEST

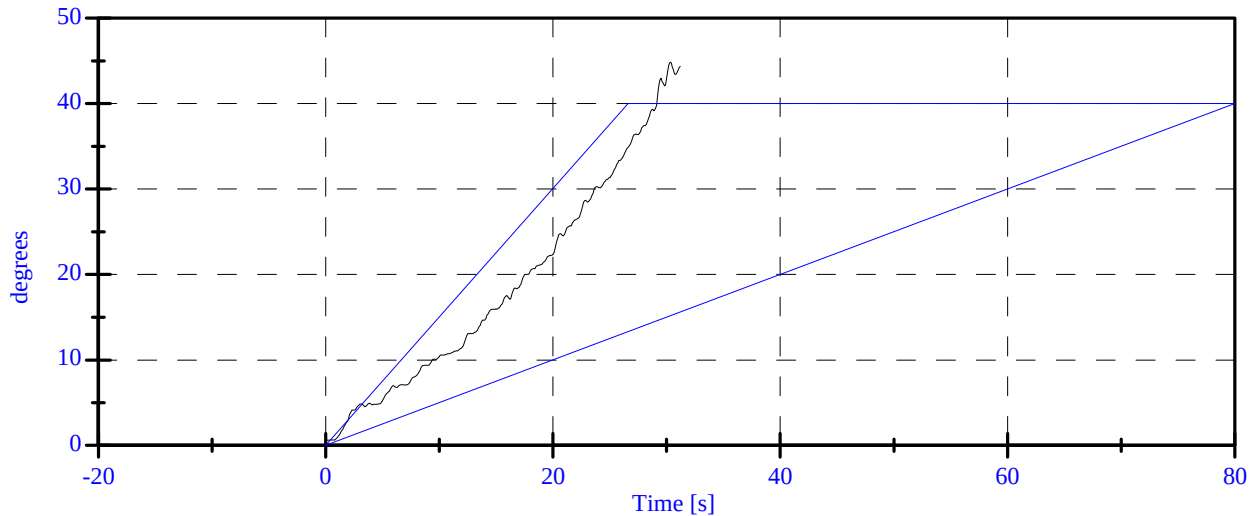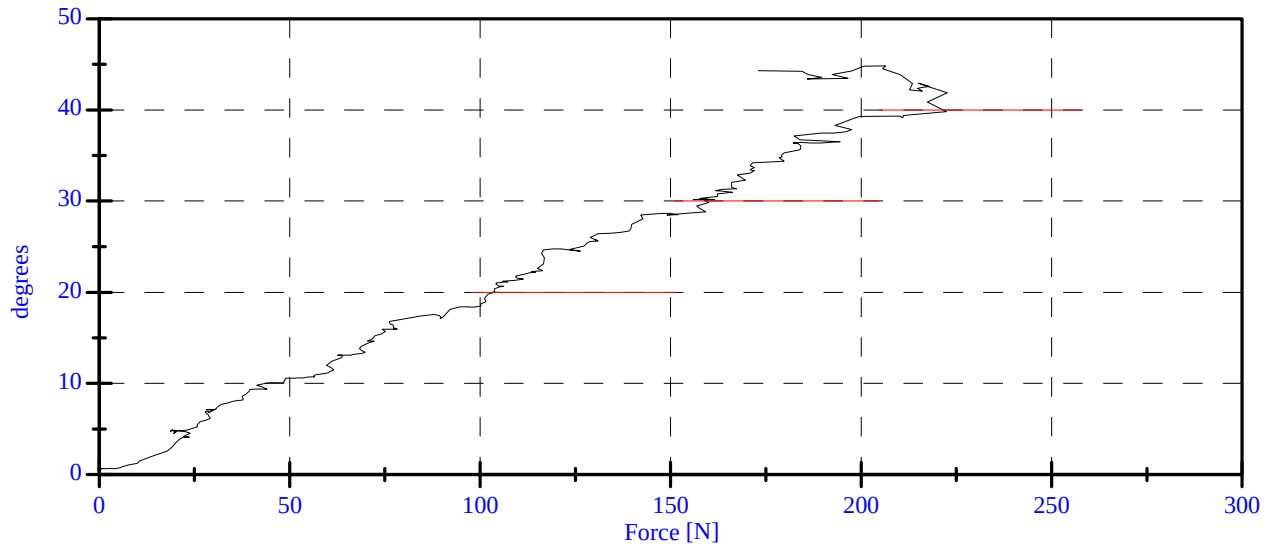

**POST TEST DUMMY INSPECTION LIST**  
**CONFIGURED FOR LEFT SIDE IMPACT**


SID H3 Serial No.: 270 Sequential Test Number: 4  
 Date: 2/19/07 Laboratory Technician: B. Swiecicki

| PART         | ITEMS CHECKED                                     | COMMENTS |
|--------------|---------------------------------------------------|----------|
| SKIN         | VISUAL INSPECTION                                 | OK       |
| HEAD         | VISUAL, BALLAST,<br>ACCELEROMETER MOUNT           | OK       |
| NECK         | VISUAL, CABLE TORQUE                              | OK       |
| SPINE BOX    | VISUAL, BALLAST, WELDMENT,<br>ACCELEROMETER MOUNT | OK       |
| RIB CAGE     | VISUAL, MEASURE, STIFFENERS                       | OK       |
| STERNUM      | VISUAL                                            | OK       |
| LUMBAR SPINE | VISUAL                                            | OK       |
| ABDOMEN      | VISUAL                                            | OK       |
| PELVIS       | VISUAL, PALPATE,<br>ACCELEROMETER MOUNT           | OK       |
| UPPER LEGS   | VISUAL                                            | OK       |
| KNEES        | VISUAL, STOPS, INSERTS                            | OK       |
| LOWER LEGS   | VISUAL, RANGE OF MOTION                           | OK       |
| ANKLES       | VISUAL, RANGE OF MOTION                           | OK       |
| FEET         | VISUAL, RANGE OF MOTION                           | OK       |
| JOINTS       | 1 TO 2 g RANGE                                    | OK       |
| OTHER        | NONE                                              | -        |

**REMARKS:** None

# TEMPERATURE TRACE

## 2007 Buick LaCrosse G70105 Environmental Conditions

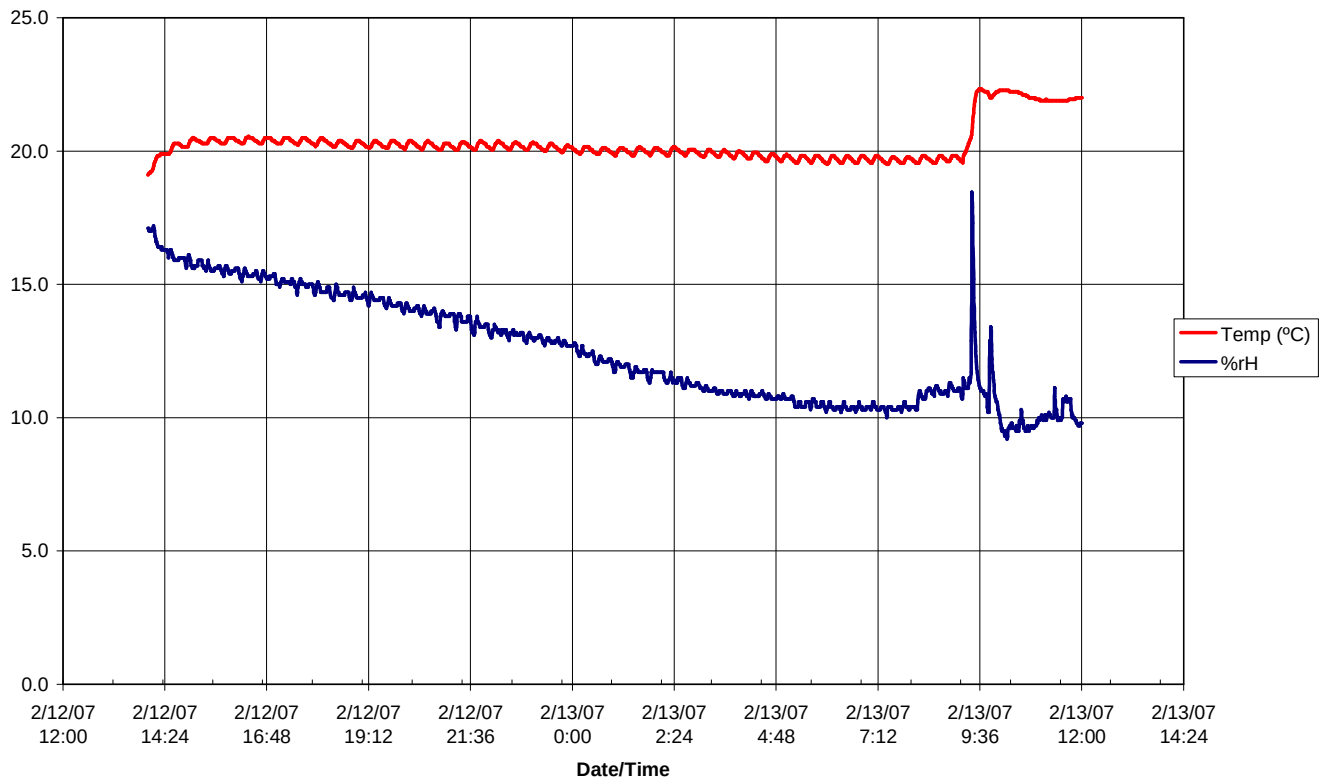



**APPENDIX D**

**TEST EQUIPMENT AND CALIBRATION INFORMATION**

# TEST EQUIPMENT LIST AND CALIBRATION INFORMATION

## SID/HIII INSTRUMENTATION

|                       | FRONT SID/HIII NO.: 269 |              |                  |
|-----------------------|-------------------------|--------------|------------------|
|                       | SERIAL NUMBER           | MANUFACTURER | CALIBRATION DATE |
| HEAD AX               | P22943                  | ENDEVCO      | 1/19/2007        |
| HEAD AY               | P35789                  | ENDEVCO      | 1/19/2007        |
| HEAD AZ               | P23164                  | ENDEVCO      | 1/19/2007        |
| UPPER NECK FX         | 442Fx                   | DENTON       | 9/8/2006         |
| UPPER NECK FY         | 442Fy                   | DENTON       | 9/8/2006         |
| UPPER NECK FZ         | 442Fz                   | DENTON       | 9/8/2006         |
| UPPER NECK MX         | 442Mx                   | DENTON       | 9/8/2006         |
| UPPER NECK MY         | 442My                   | DENTON       | 9/8/2006         |
| UPPER NECK MZ         | 442Mz                   | DENTON       | 9/8/2006         |
| UPPER RIB             | P39731                  | ENDEVCO      | 1/19/2007        |
| LOWER RIB             | P38896                  | ENDEVCO      | 1/19/2007        |
| LOWER SPINE           | P38188                  | ENDEVCO      | 1/19/2007        |
| PELVIS                | P38132                  | ENDEVCO      | 1/19/2007        |
| UPPER RIB REDUNDANT   | P39740                  | ENDEVCO      | 1/19/2007        |
| LOWER RIB REDUNDANT   | P35786                  | ENDEVCO      | 1/19/2007        |
| LOWER SPINE REDUNDANT | P38216                  | ENDEVCO      | 1/19/2007        |
| PELVIS REDUNDANT      | P35757                  | ENDEVCO      | 1/19/2007        |

|                       | REAR SID/HIII NO.: 270 |              |                  |
|-----------------------|------------------------|--------------|------------------|
|                       | SERIAL NUMBER          | MANUFACTURER | CALIBRATION DATE |
| HEAD AX               | P35812                 | ENDEVCO      | 1/22/2007        |
| HEAD AY               | P18739                 | ENDEVCO      | 1/22/2007        |
| HEAD AZ               | P19212                 | ENDEVCO      | 1/22/2007        |
| UPPER NECK FX         | 1629Fx                 | DENTON       | 9/8/2006         |
| UPPER NECK FY         | 1629Fy                 | DENTON       | 9/8/2006         |
| UPPER NECK FZ         | 1629Fz                 | DENTON       | 9/8/2006         |
| UPPER NECK MX         | 1629Mx                 | DENTON       | 9/8/2006         |
| UPPER NECK MY         | 1629My                 | DENTON       | 9/8/2006         |
| UPPER NECK MZ         | 1629Mz                 | DENTON       | 9/8/2006         |
| UPPER RIB             | P18558                 | ENDEVCO      | 1/22/2007        |
| LOWER RIB             | P18537                 | ENDEVCO      | 1/22/2007        |
| LOWER SPINE           | P18639                 | ENDEVCO      | 1/22/2007        |
| PELVIS                | P21171                 | ENDEVCO      | 1/23/2007        |
| UPPER RIB REDUNDANT   | P35818                 | ENDEVCO      | 1/22/2007        |
| LOWER RIB REDUNDANT   | P19222                 | ENDEVCO      | 1/22/2007        |
| LOWER SPINE REDUNDANT | P16576                 | ENDEVCO      | 1/22/2007        |
| PELVIS REDUNDANT      | P22639                 | ENDEVCO      | 1/23/2007        |

**REMARKS:** None

# TEST EQUIPMENT LIST AND CALIBRATION INFORMATION

## VEHICLE AND MDB INSTRUMENTATION

|                                    | VEHICLE AND MDB INSTRUMENTS |              |                  |
|------------------------------------|-----------------------------|--------------|------------------|
|                                    | SERIAL NUMBER               | MANUFACTURER | CALIBRATION DATE |
| RIGHT FRONT SILL (X)               | P23993                      | ENDEVCO      | 1/15/2007        |
| RIGHT FRONT SILL (Y)               | P23999                      | ENDEVCO      | 1/15/2007        |
| RIGHT FRONT SILL (Z)               | P23939                      | ENDEVCO      | 1/15/2007        |
| RIGHT REAR SILL (X)                | J31101                      | ENDEVCO      | 1/15/2007        |
| RIGHT REAR SILL (Y)                | J31059                      | ENDEVCO      | 1/15/2007        |
| RIGHT REAR SILL (Z)                | P23174                      | ENDEVCO      | 1/15/2007        |
| REAR FLOORPAN ABOVE AXLE (X)       | P17563                      | ENDEVCO      | 1/15/2007        |
| REAR FLOORPAN ABOVE AXLE (Y)       | P18948                      | ENDEVCO      | 1/15/2007        |
| REAR FLOORPAN ABOVE AXLE (Z)       | P14965                      | ENDEVCO      | 1/15/2007        |
| LEFT REAR SILL (Y)                 | P23137                      | ENDEVCO      | 1/16/2007        |
| LEFT FRONT SILL (Y)                | P18743                      | ENDEVCO      | 1/16/2007        |
| LEFT FRONT DOOR CENTERLINE (Y)     | -                           | -            | -                |
| RIGHT REAR SEAT OCCUPANT COMP. (Y) | P23976                      | ENDEVCO      | 1/16/2007        |
| MID REAR OF LEFT FRONT DOOR (Y)    | -                           | -            | -                |
| LEFT FRONT DOOR UPPER C/L (Y)      | -                           | -            | -                |
| MID REAR OF LEFT REAR DOOR (Y)     | -                           | -            | -                |
| LEFT REAR DOOR UPPER C/L (Y)       | -                           | -            | -                |
| LOWER LEFT B- PILLAR (Y)           | P17242                      | ENDEVCO      | 1/16/2007        |
| MIDDLE LEFT B-PILLAR (Y)           | P21441                      | ENDEVCO      | 1/16/2007        |
| LOWER LEFT A-PILLAR (Y)            | P19255                      | ENDEVCO      | 1/16/2007        |
| UPPER LEFT A-PILLAR (Y)            | P35758                      | ENDEVCO      | 1/16/2007        |
| FRONT SEAT TRACK (Y)               | P23303                      | ENDEVCO      | 1/16/2007        |
| REAR SEAT TRACK (Y)                | P23155                      | ENDEVCO      | 1/16/2007        |
| VEHICLE CG (X)                     | P16625                      | ENDEVCO      | 1/15/2007        |
| VEHICLE CG (Y)                     | P17237                      | ENDEVCO      | 1/15/2007        |
| VEHICLE CG (Z)                     | J32838                      | ENDEVCO      | 1/15/2007        |
| MDB CG (X)                         | C15007                      | ENDEVCO      | 1/26/2007        |
| MDB CG (Y)                         | C16416                      | ENDEVCO      | 1/26/2007        |
| MDB CG (Z)                         | C16499                      | ENDEVCO      | 1/26/2007        |
| MDB REAR FRAME MEMBER (X)          | C14948                      | ENDEVCO      | 1/26/2007        |
| MDB REAR FRAME MEMBER (Y)          | C16680                      | ENDEVCO      | 1/26/2007        |

**REMARKS:** None