

**REPORT NUMBER: 208-MGA-2010-010**

**VEHICLE SAFETY COMPLIANCE TESTING  
FOR  
FMVSS 208, OCCUPANT CRASH PROTECTION  
FMVSS 212, WINDSHIELD MOUNTING  
FMVSS 219, WINDSHIELD INTRUSION (PARTIAL)  
FMVSS 301, FUEL SYSTEM INTEGRITY**

**FORD MOTOR CO.  
2010 FORD TAURUS SE PASSENGER CAR  
NHTSA NO.: CA0217**

**PREPARED BY:  
MGA RESEARCH CORPORATION  
5000 WARREN ROAD  
BURLINGTON, WI 53105**



**TEST DATE: APRIL 28, 2010**

**FINAL REPORT DATE: JUNE 14, 2012**

**FINAL REPORT**

**PREPARED FOR:  
U.S. DEPARTMENT OF TRANSPORTATION  
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION  
OFFICE OF ENFORCEMENT  
OFFICE OF VEHICLE SAFETY COMPLIANCE  
1200 NEW JERSEY AVENUE, S.E., NVS-220  
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Safety Administration, in response to Contract Number DTNH22-08-D-00086.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: Jeff Lewandowski Date: June 14, 2012  
Jeff Lewandowski, Project Engineer

Reviewed by: David Winkelbauer Date: June 14, 2012  
David Winkelbauer, Facility Director

FINAL REPORT ACCEPTED BY OVSC:

Accepted By: 

Acceptance Date: June 14, 2012

**Technical Report Documentation Page**

1. Report No. 208-MGA-2010-010		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle Final Report of FMVSS 208 Compliance Testing of a 2010 Ford Taurus NHTSA No.: CA0217				5. Report Date June 14, 2012	
				6. Performing Organization Code MGA	
7. Author(s) Jeff Lewandowski, Project Engineer				8. Performing Organization Report No. 208-MGA-2010-010	
9. Performing Organization Name and Address MGA Research Corporation 5000 Warren Road Burlington, WI 53105				10. Work Unit No.	
				11. Contract or Grant No. DTNH22-08-D-00086	
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Office of Enforcement Office of Vehicle Safety Compliance 1200 New Jersey Avenue, S.E., NVS-220 Washington, D.C. 20590				13. Type of Report and Period Covered 4/28/10	
				14. Sponsoring Agency Code NVS-220	
15. Supplementary Notes					
16. Abstract Compliance tests were conducted on the subject 2010 Ford Taurus in accordance with the specifications of the Office of Vehicle Safety Compliance Test Procedure No.: TP208-14 for the determination of FMVSS 208 compliance. Test failures identified were as follows:  TEST FAILURES: None					
17. Key Words  Frontal Impact 40 kmph Vehicle Safety Compliance Testing FMVSS 208, "Occupant Crash Protection" FMVSS 212, "Windshield Mounting" FMVSS 219, (partial), "Windshield Zone Intrusion" FMVSS 301, "Fuel System Integrity"				18. Distribution Statement Copies of this report are available from the following: U.S. Department of Transportation National Highway Traffic Safety Administration Technical Information Services (TIS), NPO-411 1200 New Jersey Avenue, S.E. (Room E12-100) Washington, DC 20590	
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of Pages 161	22. Price

## TABLE OF CONTENTS

<u>Section</u>		<u>Page No</u>
1	Purpose of Compliance Tests	1
2	Tests Performed	2
3	Injury Result Summary for FMVSS 208 Tests	4
4	Discussion of Tests (if applicable)	5
5	Test Data Sheets	6
 <u>Data Sheet</u>		
1	COTR Vehicle Work Order	7
2	Report of Vehicle Condition	12
3	Certification Label and Tire Placard Information	14
15	H-Point Determination for 50 <sup>th</sup> Percentile Male Dummy	15
32	Vehicle Weight, Fuel Tank, and Attitude Data	25
33	Vehicle Accelerometer Locations and Measurements	28
34	Photographic Targets	31
35	Camera Locations	36
36	Dummy Positioning	38
37	Dummy Measurements	47
38	Crash Test	50
40	Accident Investigation Measurements	51
41	Windshield Mounting (FMVSS 212)	53
42	Windshield Zone Intrusion (FMVSS 219)	55
43	Fuel System Integrity (FMVSS 301)	57
 <u>Appendix</u>		
A	Crash Test Data	A-1
B	Crash Test Photographs	B-1
C	Instrumentation Calibration	C-1
D	Notice of Test Failure (If Applicable)	D-1

**SECTION 1**  
**PURPOSE OF COMPLIANCE TESTS**

This Federal Motor Vehicle Safety Standard 208 compliance test is part of a program conducted for the National Highway Traffic Safety Administration (NHTSA) by MGA Research Corporation (MGA) under Contract No.: DTNH22-08-D-00086. The purpose of this test was to determine whether the subject vehicle, a 2010 Ford Taurus, NHTSA No.: CA0217, meets certain performance requirements of FMVSS 208, "Occupant Crash Protection"; FMVSS 212, "Windshield Mounting"; FMVSS 219, "Windshield Zone Intrusion"; and FMVSS 301, "Fuel System Integrity". The compliance test was conducted in accordance with OVSC Laboratory Test Procedure No.: TP208-14 dated April 16, 2008.

**SECTION 2**  
**TESTS PERFORMED**

Test Vehicle: 2010 Ford Taurus  
Test Program: FMVSS 208 Compliance

NHTSA No.: CA0217  
Test Dates: 4/28/10

The following checked items indicate the tests that were performed:

- |                                     |     |  |
|-------------------------------------|-----|--|
| <input type="checkbox"/>            | 1.  | Rear seating position seat belts   |
| <input type="checkbox"/>            | 2.  | Air bag labels (S4.5.1)  |
| <input type="checkbox"/>            | 3.  | Readiness indicator (S4.5.2)   |
| <input type="checkbox"/>            | 4.  | Passenger air bag manual cut-off device (S4.5.4)   |
| <input type="checkbox"/>            | 5.  | Lap belt lockability (S7.1.1.5)  |
| <input type="checkbox"/>            | 6.  | Seat belt warning system (S7.3)  |
| <input type="checkbox"/>            | 7.  | Seat belt contact force (S7.4.3)   |
| <input type="checkbox"/>            | 8.  | Seat belt latch plate access (S7.4.4)  |
| <input type="checkbox"/>            | 9.  | Seat belt retraction (S7.4.5)  |
| <input type="checkbox"/>            | 10. | Seat belt guides and hardware (S7.4.6)   |
| <input type="checkbox"/>            | 11. | Air bag suppression telltale (S19.2.2)   |
| <input type="checkbox"/>            | 12. | Suppression tests with 12-month-old CRABI dummy (Part 572, Subpart R)  |
| <input type="checkbox"/>            | 13. | Suppression tests with Newborn infant (Part 572, Subpart K)  |
| <input type="checkbox"/>            | 14. | Suppression tests with 3-year-old dummy (Part 572, Subpart P)  |
| <input type="checkbox"/>            | 15. | Suppression tests with 6-year-old dummy (Part 572, Subpart N)  |
| <input type="checkbox"/>            | 16. | Test of Reactivation of the passenger air bag system with an unbelted 5 <sup>th</sup> percentile female dummy. |
| <input type="checkbox"/>            | 17. | Low risk deployment test with 12-month-old dummy (Part 572, Subpart R)   |
| <input type="checkbox"/>            | 18. | Low risk deployment test with 3-year-old dummy (Part 572, Subpart P)   |
| <input type="checkbox"/>            | 19. | Low risk deployment test with 6-year-old dummy (Part 572, Subpart N)   |
| <input type="checkbox"/>            | 20. | Low risk deployment test with 5 <sup>th</sup> female dummy (Part 572, Subpart O)                               |
| <input checked="" type="checkbox"/> | 21. | Impact Tests   |
| <input type="checkbox"/>            |     | Frontal Oblique  |
| <input type="checkbox"/>            |     | Belted 50 <sup>th</sup> male dummy driver and passenger (0 to 48 kmph) (S5.1.1(a))                             |
| <input type="checkbox"/>            |     | Unbelted 50 <sup>th</sup> male dummy driver and passenger (0 to 48 kmph) (S5.1.2(a)(1))                        |
| <input type="checkbox"/>            |     | Unbelted 50 <sup>th</sup> male dummy driver and passenger (32 to 40 kmph) (S5.1.2(a)(1) or S5.1.2(b))          |
| <input checked="" type="checkbox"/> |     | Frontal 0°   |
| <input type="checkbox"/>            |     | Belted 50 <sup>th</sup> male dummy driver (0 to 48 kmph) (S5.1.1.(b)(1) or S5.1.1(a))                          |
| <input type="checkbox"/>            |     | Belted 50 <sup>th</sup> male dummy passenger (0 to 48 kmph) (S5.1.1.(b)(1) or S5.1.1(a))                       |
| <input type="checkbox"/>            |     | Belted 5 <sup>th</sup> female dummy driver (0 to 48 kmph) (S16.1(a))   |
| <input type="checkbox"/>            |     | Belted 5 <sup>th</sup> female dummy passenger (0 to 48 kmph) (S16.1(a))  |
| <input type="checkbox"/>            |     | Belted 50 <sup>th</sup> male dummy driver and passenger (0 to 56 kmph) (S5.1.1.(b)(2))                         |
| <input type="checkbox"/>            |     | Unbelted 50 <sup>th</sup> male dummy driver and passenger (0 to 48 kmph) (S5.1.2(a) (1))                       |
| <input checked="" type="checkbox"/> |     | Unbelted 50 <sup>th</sup> male dummy driver (32 to 40 kmph) (S5.1.2.(a)(2) or S5.1.2(b))                       |
| <input checked="" type="checkbox"/> |     | Unbelted 50 <sup>th</sup> male dummy passenger (32 to 40 kmph) (S5.1.2.(a)(2) or S5.1.2(b))                    |
| <input type="checkbox"/>            |     | Unbelted 5 <sup>th</sup> female dummy driver (32 to 40 kmph) (S16.1(b))  |
| <input type="checkbox"/>            |     | Unbelted 5 <sup>th</sup> female dummy passenger (32 to 40 kmph) (S16.1(b))                                     |
| <input type="checkbox"/>            |     | 40% Offset 0° Belted 5 <sup>th</sup> female dummy driver and passenger (0 to 40 kmph) (S18.1)                  |
| <input type="checkbox"/>            | 22. | FMVSS 204 Indicant Test  |
| <input checked="" type="checkbox"/> | 23. | FMVSS 212 Test   |
| <input checked="" type="checkbox"/> | 24. | FMVSS 219 Indicant Test  |
| <input checked="" type="checkbox"/> | 25. | FMVSS 301 Frontal Test   |

For the crash test, the vehicle was instrumented with 8 accelerometers. The data from the vehicle and dummies were sampled at 10,000 samples per second and processed as specified in SAE J211/1 MAR95 and FMVSS 208, S4.13.

The dynamic tests were recorded using high-speed digital video.

The vehicle appears to meet all of the performance requirements to which it was tested.

**SECTION 3**

**INJURY RESULT SUMMARY FOR FMVSS 208 TESTS**

Test Vehicle: 2010 Ford Taurus  
 Test Program: FMVSS 208 Compliance

NHTSA No.: CA0217  
 Test Date: 4/28/10

**40 kmph Frontal Crash**

Impact Angle:	Zero degrees			
Belted Dummies:		Yes	X	No

Speed Range:		0 to 40 kmph	X	32 to 40 kmph
		0 to 48 kmph		0 to 56 kmph

Test Speed (kmph):	39.8	Test Weight (kg):	2031.3
--------------------	------	-------------------	--------

Driver Dummy:		5 <sup>th</sup> female	X	50 <sup>th</sup> male
Passenger Dummy:		5 <sup>th</sup> female	X	50 <sup>th</sup> male

**50<sup>th</sup> Percentile Male Frontal Crash Test**

**Vehicles certified to S5.1.1(b)(1), S5.1.1(b)(2), S5.1.2(a)(2), or S5.1.2(b)**

Injury Criteria	Max. Allowable Injury Assessment Values	Driver	Passenger
HIC15	700	69	75
N <sub>te</sub>	1.0	0.0	0.2
N <sub>tf</sub>	1.0	0.4	0.1
N <sub>ce</sub>	1.0	0.7	0.2
N <sub>cf</sub>	1.0	0.2	0.1
Neck Tension	4170 N	701	596
Neck Compression	4000 N	2119	504
Chest g	60 g	36	30
Chest Displacement	63 mm	24	8
Left Femur	10,000 N	4761	3958
Right Femur	10,000 N	4209	4220

**SECTION 4**  
**DISCUSSION OF TESTS**

Test Vehicle: 2010 Ford Taurus  
Test Program: FMVSS 208 Compliance

NHTSA No.: CA0217  
Test Date: 4/28/10

At the request of the COTR, only a frontal crash test was performed on the 2010 Ford Taurus, CA0217.

**SECTION 5**  
**TEST DATA SHEETS**

Test Vehicle: 2010 Ford Taurus  
Test Program: FMVSS 208 Compliance

NHTSA No.: CA0217  
Test Date: 4/28/10

**DATA SHEET 1**  
**COTR VEHICLE WORK ORDER**

Test Vehicle: 2010 Ford Taurus  
Test Program: FMVSS 208 Compliance

NHTSA No.: CA0217  
Test Date: 4/28/10

COTR Signature: Brian Smith

Test to be performed for this vehicle are checked below:

- |                          |     |  |
|--------------------------|-----|--|
| <input type="checkbox"/> | 1.  | Rear Seating Position Seat Belts   |
| <input type="checkbox"/> | 2.  | Air Bag Labels (S4.5.1)  |
| <input type="checkbox"/> | 3.  | Readiness Indicator (S4.5.2)   |
| <input type="checkbox"/> | 4.  | Passenger Air Bag Manual Cut-off Device (S4.5.4)   |
| <input type="checkbox"/> | 5.  | Lap Belt Lockability (S7.1.1.5)  |
| <input type="checkbox"/> | 6.  | Seat Belt Warning System (S7.3)  |
| <input type="checkbox"/> | 7.  | Seat Belt Contact Force (S7.4.3)   |
| <input type="checkbox"/> | 8.  | Seat Belt Latch Plate Access (S7.4.4)  |
| <input type="checkbox"/> | 9.  | Seat Belt Retraction (S7.4.5)  |
| <input type="checkbox"/> | 10. | Seat Belt Guides and Hardware (S7.4.6)   |
| <input type="checkbox"/> | 11. | Air bag suppression telltale (S19.2.2)   |
| <input type="checkbox"/> | 12. | Suppression tests with 12-month-old CRABI dummy (Part 572, Subpart R) using the following indicated child restraints (mid-height seat position): |

Section B – Rear Facing (unbelted and belted rear facing, unbelted forward facing)

<input type="checkbox"/>	Century Smart Fit 4543	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Cosco Arriva 22-013	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Evenflo Discovery Adjust Right 212	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Graco Infant 8457	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Graco Snugride	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Peg Perego	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward

Section C – Convertible (unbelted and belted rear facing, unbelted and belted forward facing)

<input type="checkbox"/>	Britax Roundabout E9L02	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Cosco High Back Booster 22-209	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Cosco Touriva 02519	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Cosco Summit Deluxe 22-262	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Evenflo Generations 352	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Evenflo Medallion 254	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Evenflo Tribute V 379	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Graco ComfortSport	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Graco Platinum Cargo	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Graco SafeSeat Step 2	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward

- |                          |     |  |
|--------------------------|-----|--|
| <input type="checkbox"/> | 13. | Suppression tests with newborn infant (Part 572, Subpart K) using the following indicated child restraints (mid-height seat position). |
|--------------------------|-----|--|

Section A – Car Bed (Belted)

<input type="checkbox"/>	Angel Guard Angel Ride	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
--------------------------	------------------------	--------------------------	---------------	--------------------------	--------------	--------------------------	--------------

- |                          |     |  |
|--------------------------|-----|--|
| <input type="checkbox"/> | 14. | Suppression tests with 3-year-old dummy (Part 572, Subpart P) using the following indicated child restraints where a child restraint is required (mid-height seat position): |
|--------------------------|-----|--|

Section C – Convertible (Belted forward-facing)

<input type="checkbox"/>	Britax Roundabout E9L02	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Cosco High Back Booster 22-209	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Cosco Touriva 02519	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Cosco Summit Deluxe 22-262	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Evenflo Generations 352	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Evenflo Medallion 254	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Evenflo Tribute V 379	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Graco ComfortSport	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Graco Platinum Cargo	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Graco SafeSeat Step 2	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward

Section D – Toddler/Belt Positioning Booster (Belted)

<input type="checkbox"/>	Britax Roadster 9004	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Cosco High Back Booster 22-209	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Evenflo Right Fit 245	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward

15. Suppression tests with representative 3-year-old child using the following indicated child restraints where a child restraint is required (mid-height position). (Appendix H, Data Sheet 19H and 20H)

Section C – Convertible (Belted forward-facing)

<input type="checkbox"/>	Britax Roundabout E9L02	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Cosco High Back Booster 22-209	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Cosco Touriva 02519	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Cosco Summit Deluxe 22-262	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Evenflo Generations 352	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Evenflo Medallion 254	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Evenflo Tribute V 379	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Graco ComfortSport	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Graco Platinum Cargo	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Graco SafeSeat Step 2	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward

Section D – Toddler/Belt Positioning Booster (Belted)

<input type="checkbox"/>	Britax Roadster 9004	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Cosco High Back Booster 22-209	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward
<input type="checkbox"/>	Evenflo Right Fit 245	<input type="checkbox"/>	Full Rearward	<input type="checkbox"/>	Mid Position	<input type="checkbox"/>	Full Forward

16. Suppression tests with 3-year-old dummy (Part 572, Subpart P) in the following positions (mid-height seat position):

<input type="checkbox"/>	Sitting on seat with back against seat back (S22.2.2.1)		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	Full Rearward	Mid Position	Full Forward
<input type="checkbox"/>	Sitting on seat with back against reclined seat back (S22.2.2.2)		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	Full Rearward	Mid Position	Full Forward
<input type="checkbox"/>	Sitting on seat with back not against seat back (S22.2.2.3)		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	Full Rearward	Mid Position	Full Forward
<input type="checkbox"/>	Sitting on seat edge, spine vertical, hands by the child's side (S22.2.2.4)		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	Full Rearward	Mid Position	Full Forward
<input type="checkbox"/>	Standing on seat, facing forward (S22.2.2.5)		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	Full Rearward	Mid Position	Full Forward
<input type="checkbox"/>	Kneeling on seat facing forward (S22.2.2.6)		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	Full Rearward	Mid Position	Full Forward
<input type="checkbox"/>	Kneeling on seat facing rearward (S22.2.2.7)		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	Full Rearward	Mid Position	Full Forward
<input type="checkbox"/>	Lying on seat (S22.2.2.8)		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	Full Rearward	Mid Position	Full Forward

17. Suppression tests with representative 3-year-old child in the following positions (mid-height seat position):

- Sitting on seat with back against seat back (S22.2.2.1)
  - Full Rearward
  - Mid Position
  - Full Forward
- Sitting on seat with back against reclined seat back (S22.2.2.2)
  - Full Rearward
  - Mid Position
  - Full Forward
- Sitting on seat with back not against seat back (S22.2.2.3)
  - Full Rearward
  - Mid Position
  - Full Forward
- Sitting on seat edge, spine vertical, hands by the child's side (S22.2.2.4)
  - Full Rearward
  - Mid Position
  - Full Forward
- Standing on seat, facing forward (S22.2.2.5)
  - Full Rearward
  - Mid Position
  - Full Forward
- Kneeling on seat facing forward (S22.2.2.6)
  - Full Rearward
  - Mid Position
  - Full Forward
- Kneeling on seat facing rearward (S22.2.2.7)
  - Full Rearward
  - Mid Position
  - Full Forward
- Lying on seat (S22.2.2.8)
  - Full Rearward
  - Mid Position
  - Full Forward

18. Suppression tests with 6-year-old dummy (Part 572, Subpart N) using the following indicated child restraints where a child restraint is required (mid-height seat position):

Section D

Britax Roadster 9004	Full Rearward	Mid Position	Full Forward
Graco Platinum Cargo	Full Rearward	Mid Position	Full Forward
Cosco High Back Booster 22-209	Full Rearward	Mid Position	Full Forward
Evenflo Right Fit 245	Full Rearward	Mid Position	Full Forward
Evenflo Generations 352	Full Rearward	Mid Position	Full Forward
Cosco Summit Deluxe 22-262	Full Rearward	Mid Position	Full Forward

19. Suppression tests with representative 6-year-old child using the following indicated child restraints where a child restraint is required (mid-height seat position):

Section D

Britax Roadster 9004	Full Rearward	Mid Position	Full Forward
Graco Platinum Cargo	Full Rearward	Mid Position	Full Forward
Cosco High Back Booster 22-209	Full Rearward	Mid Position	Full Forward
Evenflo Right Fit 245	Full Rearward	Mid Position	Full Forward
Evenflo Generations 352	Full Rearward	Mid Position	Full Forward
Cosco Summit Deluxe 22-262	Full Rearward	Mid Position	Full Forward

20. Suppression tests with 6-year-old dummy (Part 572, Subpart N) in the following positions (mid-height seat position):

- Sitting on seat with back against seat back (S22.2.2.1)
  - Full Rearward
  - Mid Position
  - Full Forward
- Sitting on seat with back against reclined seat back (S22.2.2.2)
  - Full Rearward
  - Mid Position
  - Full Forward
- Sitting on seat edge, spine vertical, hands by the child's side (S22.2.2.4)
  - Full Rearward
  - Mid Position
  - Full Forward
- Sitting back in the seat and leaning on the right front passenger door (S24.2.3)
  - Full Rearward
  - Mid Position
  - Full Forward

21. Suppression tests with representative 6-year-old child in the following positions (mid-height seat position):
- Sitting on seat with back against seat back (S22.2.2.1)
    - Full Rearward     Mid Position     Full Forward
  - Sitting on seat with back against reclined seat back (S22.2.2.2)
    - Full Rearward     Mid Position     Full Forward
  - Sitting on seat edge, spine vertical, hands by the child's side (S22.2.2.4)
    - Full Rearward     Mid Position     Full Forward
  - Sitting back in the seat and leaning on the right front passenger door (S24.2.3)
22. Test of Reactivation of the Passenger Air Bag System with an Unbelted 5<sup>th</sup> percentile female dummy (S20.3, 22.3, S24.3) (mid-height seat position). Perform this test after the following suppression tests: After each restraint.
23. Test of Reactivation of the Passenger Air Bag System with a representative 5<sup>th</sup> percentile female (S20.3, 22.3, S24.3) (mid-height seat position). Perform this test after the following suppression tests:
24. Low risk deployment test with 12-month-old dummy (Part 572, Subpart R) using the following indicated child restraints (full forward, mid-height seat position)(S20.4):
- Section B
- Century Smart Fit 4543
  - Cosco Arriva 22-013
  - Evenflo Discovery Adjust Right 212
  - Graco Infant 8457
  - Graco Snugride
  - Peg Perego
- Section C
- Britax Roundabout E9L02
  - Cosco Touriva 02519
  - Evenflo Medallion 254
  - Evenflo Tribute V 379
  - Graco ComfortSport
25. Low risk deployment test with 3-year-old dummy (Part 572, Subpart P) in the following positions:
- Position 1 (rearmost, lowest seat position)
  - Position 2 (mid-height seat position)
26. Low risk deployment test with 6-year-old dummy (Part 572, Subpart N) in the following positions:
- Position 1 (rearmost, lowest seat position)
  - Position 2 (mid-height seat position)
27. Low risk deployment test with 5<sup>th</sup> female dummy (Part 572, Subpart O) in the following positions:
- Position 1 (mid-height seat position)
  - Position 2 (mid-height seat position)
28. Impact Tests
- | <input type="checkbox"/> Frontal Oblique | Impact Angle:   | Test Speed: |
|--|---|-------------|
| <input type="checkbox"/>                 | Belted 50 <sup>th</sup> male dummy driver and passenger (0 to 48 kmph) (S5.1.1(a))                    |             |
| <input type="checkbox"/>                 | Unbelted 50 <sup>th</sup> male dummy driver and passenger (0 to 48 kmph) (S5.1.2(a)(1))               |             |
| <input type="checkbox"/>                 | Unbelted 50 <sup>th</sup> male dummy driver and passenger (32 to 40 kmph) (S5.1.2(a)(2) or S5.1.2(b)) |             |

X	Frontal 0° - Test Speed: 39.8 kmph
	Belted 50 <sup>th</sup> male dummy driver (0 to 48 kmph) (S5.1.1.(b)(1) or S5.1.1(a))
	Belted 50 <sup>th</sup> male dummy passenger (0 to 48 kmph) (S5.1.1.(b)(1) or S5.1.1(a))
	Belted 5 <sup>th</sup> female dummy driver (0 to 48 kmph) (S16.1(a)(1))
	Belted 5 <sup>th</sup> female dummy passenger (0 to 48 kmph) (S16.1(a)(1))
	Belted 5 <sup>th</sup> female dummy driver and passenger (0 to 56 kmph) (S16.1(a)(2))
	Belted 50 <sup>th</sup> male dummy driver and passenger (0 to 56 kmph) (S5.1.1.(b)(2))
	Unbelted 50 <sup>th</sup> male dummy driver and passenger (0 to 48 kmph) (S5.1.2(a) (1))
X	Unbelted 50 <sup>th</sup> male dummy driver (32 to 40 kmph) (S5.1.2.(a)(2) or S5.1.2(b))
X	Unbelted 50 <sup>th</sup> male dummy passenger (32 to 40 kmph) (S5.1.2.(a)(2) or S5.1.2(b))
	Unbelted 5 <sup>th</sup> female dummy driver (32 to 40 kmph) (S16.1(b))
	Unbelted 5 <sup>th</sup> female dummy passenger (32 to 40 kmph) (S16.1(b))
	40% Offset 0° Belted 5 <sup>th</sup> female dummy driver and passenger (0 to 40 kmph) (S18.1) Test Speed:

	29. FMVSS 204 Indicant Test
X	30. FMVSS 212 Test
X	31. FMVSS 219 Indicant Test
X	32. FMVSS 301 Frontal Test

**DATA SHEET 2**  
**REPORT OF VEHICLE CONDITION**

Test Vehicle: 2010 Ford Taurus  
Test Program: FMVSS 208 Compliance

NHTSA No.: CA0217  
Test Date: 4/28/10

CONTRACT NO.: DTNH22-08-D-00086 Date: 5/4/10  
FROM (Lab and rep name): MGA Research Corporation  
TO: NHTSA, OVSC, NVS-220

PURPOSE: (X) Initial Receipt ( ) Received via Transfer (X) Present vehicle condition

MODEL YEAR/MAKE/MODEL/BODY STYLE: 2010 Ford Taurus 4 Door  
MANUFACTURE DATE: 09/09  
NHTSA NO. CA0217 GVWR: 2386 kg (5260 lbs)  
BODY COLOR: White Suede GAWR (Fr): 1279 kg (2820 lbs)  
VIN: 1FAHP2DW7AG116528 GAWR (Rr): 1143 kg (2520 lbs)

ODOMETER READINGS: ARRIVAL (miles): 63.4 DATE: 3/30/10  
COMPLETION (miles): 64.3 DATE: 4/28/10

PURCHASE PRICE: (\$) 25,400

DEALER'S NAME: Boucher Fleet Group. – 1421 E Moreland Blvd, Waukesha, WI,  
53186

- A. All options listed on window sticker are present on the test vehicle:  
 Yes  No
- B. Tires and wheel rims are new and the same as listed:  Yes  No
- C. There are no dents or other interior or exterior flaws:  Yes  No
- D. The vehicle has been properly prepared and is in running condition:  
 Yes  No
- E. Keyless remote is available and working:  Yes  No
- F. The glove box contains an owner's manual, warranty document, consumer information, and extra set of keys:  Yes  No
- G. Proper fuel filler cap is supplied on the test vehicle:  Yes  No
- H. Using permanent marker, identify vehicle with NHTSA number and FMVSS test type(s) on roof line above driver door or for school buses, place a placard with NHTSA number inside the windshield and to the exterior front and rear side of bus:  
 Yes  No
- I. Place vehicle in storage area:  Yes  No
- J. Inspect the vehicle's interior and exterior, including all windows, seats, doors, etc. to confirm that each system is complete and functional per the manufacturer's specifications. Any damage, misadjustment, or other unusual condition that could influence the test program or test results shall be recorded. Report any abnormal condition to the NHTSA COTR before beginning any test:  
 Vehicle OK  Conditions reported below in comment section

Identify the letter above to which any of the following comments apply.

Comments: \_\_\_\_\_

**REPORT OF VEHICLE CONDITION AT THE COMPLETION OF TESTING**

LIST OF FMVSS TESTS PERFORMED BY THIS LAB: FMVSS 208, 212, 219, 301

VEHICLE: 2010 Ford Taurus

NHTSA NO.: CA0217

REMARKS:

Equipment that is no longer on the test vehicle as noted on previous page:

Right Hand Rear Tail Light, Spare Tire, Jack, Tools, Trunk Carpet, Rear Floor Mats

Explanation for equipment removal:

Components removed for instrumentation installation and to meet target weight.

Test Vehicle Condition:

25 mph frontal impact damage- front suspension & structure damaged, hood & front quarter panels damaged, radiator damaged, air bags & pretensioners deployed, Stoddard in fuel system

RECORDED BY: Jeff Lewandowski

DATE: 5/4/2010

APPROVED BY: David Winkelbauer

DATE: 5/4/2010

#####

**RELEASE OF TEST VEHICLE**

The vehicle described above is released from MGA to be delivered to:

Date:

Time:

Odometer:

Lab Rep's Signature:

Title:

Carrier/Customer Rep:

Date:

**DATA SHEET 3**

**CERTIFICATION LABEL AND TIRE PLACARD INFORMATION**

Test Vehicle: 2010 Ford Taurus  
 Test Program: FMVSS 208 Compliance  
 Test Technician: Tim Novak

NHTSA No.: CA0217  
 Test Date: 4/28/10

<b>Certification Label (Part 567)</b>	
Manufacturer:	FORD MOTOR CO.
Date of Manufacture:	09/09
VIN:	1FAHP2DW7AG116528
Vehicle Certified As (Pass. Car/MPV/Truck/Bus):	Passenger Car
Front Axle GVWR:	1279 kg (2820 lbs)
Rear Axle GVWR:	1143 kg (2520 lbs)
Total GVWR:	2386 kg (5260 lbs)

<b>Tire Placard for Motor Vehicles with GVWR of 10,000 lb or Less and Passenger Cars (571.110)</b>	
Vehicle Capacity Weight:	430 kg (950 lbs)
Designated Seating Capacity Front:	2
Designated Seating Capacity Rear:	3
Total Designated Seating Capacity:	5
Recommended Cold Tire Inflation Pressure Front:	260 kpa (38 psi)
Recommended Cold Tire Inflation Pressure Rear:	260 kpa (38 psi)
Recommended Tire Size:	P235/60R17
Tire Size on Vehicle:	P235/60R17

Signature: 

Date: 4/28/10

DATA SHEET 15

H-POINT DETERMINATION FOR 50<sup>TH</sup> PERCENTILE MALE DUMMY

Test Vehicle: 2010 Ford Taurus  
Test Program: FMVSS 208 Compliance  
Test Technician: Jordan Haynes

NHTSA No.: CA0217  
Test Date: 4/28/10

Driver Designated Seating Position       Passenger Designated Seating Position

1. Position the seat's adjustable lumbar supports so that the lumbar support is in its lowest, retracted or deflated adjustment position. (S8.1.3)  
 N/A – No lumbar adjustment
2. Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2)  
 N/A – No additional support adjustment
3. Use all the seat controls that have any affect on the fore-aft movement of the seat to move the seat cushion to the rearmost position. **Mark** this position. (8/31/95 legal interpretation to Hogan and Hartson)
4. Use all the seat controls that have any affect on the fore-aft movement of the seat to move the seat cushion to the foremost position. **Mark** this position. (8/31/95 legal interpretation to Hogan and Hartson)
5. **Mark** each fore-aft position so that there is a visual indication when the seat is at a particular position. For manual seats, **mark** each detent. For power seats, **mark** only the rearmost, middle, and foremost positions. Label three of the positions with the following: F for foremost, M for mid-position (if there is no mid-position, label the closest adjustment position to the rear of the mid-point), and R for rearmost. Determine the mid fore-aft seat position based on the foremost and rearmost positions determined in items 3 and 4. (8/31/95 legal interpretation to Hogan and Hartson)
6. Move the seat to the mid position.
7. While maintaining the mid position, move the seat to its lowest position. **Mark** the height position. For seats with adjustable seat cushions, use the manufacturer's recommended seat cushion angle for determining the lowest height position.
8. Visually **mark** the seat back angle, if adjustable, at the manufacturer's nominal design riding position for a **50th percentile adult male** in the manner specified by the manufacturer.  
 N/A – No seat back angle adjustment.  
Manufacturer's design seat back angle: 22° Seat Back Angle
9. Is the seat a bucket seat?  
 Yes, go to 10 and skip 11  
 No, go to 11 and skip 10
10. Bucket seats:  
Locate and **mark** for future reference the longitudinal centerline of the seat cushion. The intersection of the vertical longitudinal plane that passes through the SgRP and the seat cushion upper surface determines the longitudinal centerline of a bucket seat cushion. (S10.4.1.2 and S16.3.1.10)

11. Bench seats (complete ONLY the one that is applicable to the seat being marked):
- 11.1 Driver Seat  
Locate and **mark** for future reference the longitudinal line on the seat cushion that marks the intersection of the vertical longitudinal plane through the centerline of the steering wheel and the seat cushion upper surface. (S10.4.1.1)
- 11.2 Passenger Seat  
Locate and **mark** for future reference the longitudinal centerline of the passenger seat cushion. The longitudinal centerline is the same distance from the longitudinal centerline of the vehicle as the center of the steering wheel. (S10.4.1.1)  
Record the distance from the longitudinal centerline of the vehicle to the center of the steering wheel. \_\_\_\_\_  
Record the distance from the longitudinal centerline of the vehicle to the longitudinal centerline of the seat cushion. \_\_\_\_\_
12. Place a 910 mm<sup>2</sup> piece of muslin cotton cloth over the seat area. (The muslin cloth shall be comparable to 48 threads/in<sup>2</sup> and density of 2.85 lb/yd.) Tuck the muslin cloth in a sufficient amount to prevent hammocking of the material.
13. Place the seat and back assembly of the H-Point machine at the centerline of the seat as determined in item 10 or 11.
14. Install the lower leg, and foot segments.
15. Set the length of the lower leg segment at 16.3 inches and the length of the thigh bar at 15.8 inches.
16. Leg and foot placement.
- 16.1 Driver Designated Seating Position.
- 16.1.1 Insert the pin so that the foot angle is never less than 87 degrees.
- 16.1.2 Place the right foot on the undepressed accelerator pedal with the sole of the foot on the pedal and the heel as far forward as allowable. Do not place the heel on the toe board.
- 16.1.3 Adjust the left leg to be the same distance from H-point machine centerline as the right leg.
- 16.1.4 With the T-bar level, place the left foot on the toe board with the rearmost point of the heel resting on the floor pan as close as possible to the point of intersection of the planes described by the toe board and the floor pan and not on the wheel well projection. If the foot cannot be positioned on the toe board, set it on the floor pan.
- Foot on toe board  
 Foot on floor pan
- 16.2 Passenger Designated Seating Position.
- 16.2.1 Insert the pin so that the foot angle is never less than 87 degrees.
- 16.2.2 Space the lower legs 10.6 inches apart, equally spaced about the centerline of the H-point machine.

- 16.2.3 With the T-bar level, place the left foot on the toe board with the rearmost point of the heel resting on the floor pan as close as possible to the point of intersection of the planes described by the toe board and the floor pan and not on the wheel well projection. If the foot cannot be positioned on the toe board, set it on the floor pan.
- Foot on toe board.
  - Foot on floor pan.
- 16.2.4 With the T-bar level, place the right foot on the toe board with the rearmost point of the heel resting on the floor pan as close as possible to the point of intersection of the planes described by the toe board and the floor pan and not on the wheel well projection. If the foot cannot be positioned on the toe board, set it on the floor pan.
- Foot on toe board.
  - Foot on floor pan.
17. Apply the lower leg weights.
18. Apply the thigh weights.
19. Tilt the back pan forward against the forward stop and draw the H-point machine away from the seatback using the T-bar.
20. Repositioning the back pan.
- 20.1 Allow the H-point machine to slide rearward until a forward horizontal restraining load on the T-bar is no longer required due to the seat pan contacting the seat back.
- The seat pan does not slide rearward. Go to 20.2
- 20.2 Slide the H-point machine rearward by a horizontal rearward load applied at the T-bar until the seat pan contacts the seat back.
21. Apply a 10 kg load at the intersection of the hip angle quadrant and the T-bar housing along a line from the above intersection to a point just above the thigh bar housing.
22. Again apply a 10 kg load at the intersection of the hip angle quadrant and the T-bar housing along a line from the above intersection to a point just above the thigh bar housing.
23. Carefully return the back pan to the seat back.
24. Install the right and left buttock weights.
25. Install the eight torso weights alternately the installation between right and left.
26. Tilt the back pan forward until the stop is contacted.
27. Rock the H-point from side to side over a 10 degree arc (5 degrees to each side of the vertical centerline) for three complete cycles. Restrain the T-bar during rocking so that the seat pan does not change position. Minimize any inadvertent exterior loads applied in a vertical or fore-aft direction. The feet are free to move during this rocking motion.
28. Without applying a forward or lateral load lift the right foot off the floor the minimum amount necessary until no additional forward foot movement is obtained.
29. Lower the right foot until the heel is in contact with the floor pan and the ball of the foot is in contact with the floor, toe board, or undepressed accelerator pedal.

- X 30. Without applying a forward or lateral load lift the left foot off the floor the minimum amount necessary until no additional forward foot movement is obtained.
- X 31. Lower the left foot until the heel is in contact with the floor pan and the ball of the foot is in contact with the floor or toe board.
- X 32. Is the seat pan level?  
 Yes, Go to 34.  
 No, Go to 33.
33. Apply a sufficient lateral load to the top of the seatback pan to level the H-point machine seat pan on the seat.
- X 34. Holding the T-bar to prevent the H-point from sliding forward on the seat cushion, return the seatback pan to the seatback.
- X 35. Holding the T-bar to prevent the H-point from sliding forward on the seat cushion, apply sufficient rearward force perpendicular to the back angle bar just above the torso weights to increase the hip angle 3 degrees. Minimize the exterior downward or side forces applied to the H-point machine. Release the force. Repeat this step until the hip angle readout is identical. Complete as many force applications as necessary and record the results in the following table:


Force Application	Hip Angle
1	96
2	97
3	98
4	99
5	99

- X 36. Is the H-point machine level?  
 Yes, go to 37.  
 No, relevel. Go back to item 26 and repeat using a new data sheet.

X37. Record the H-point location.  
Describe and mark the measuring reference point.

Driver H-Point	
HP to Floor Z	172
HP to Hinge X	711
HP to Sill Y	264
HP to Striker X	188
HP to Dash X	496
HP to Header Z	764

H-Point Machine	
Left Knee	125
Right Knee	125
Left Foot Angle	130°
Right Foot Angle	86°
Left Leg	100
Right Leg	135
Hip Angle	99°
Back Angle	21°

  
\_\_\_\_\_

I certify that I have read and performed each instruction.

4/28/10

Date

## DATA SHEET 15

### H-POINT DETERMINATION FOR 50<sup>TH</sup> PERCENTILE MALE DUMMY

Test Vehicle: 2010 Ford Taurus  
Test Program: FMVSS 208 Compliance  
Test Technician: Jordan Haynes

NHTSA No.: CA0217  
Test Date: 4/28/10

Driver Designated Seating Position       Passenger Designated Seating Position

1. Position the seat's adjustable lumbar supports so that the lumbar support is in its lowest, retracted or deflated adjustment position. (S8.1.3)  
 N/A – No lumbar adjustment.
2. Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2)  
 N/A – No additional support adjustment.
3. Use all the seat controls that have any affect on the fore-aft movement of the seat to move the seat cushion to the rearmost position. **Mark** this position. (8/31/95 legal interpretation to Hogan and Hartson)
4. Use all the seat controls that have any affect on the fore-aft movement of the seat to move the seat cushion to the foremost position. **Mark** this position. (8/31/95 legal interpretation to Hogan and Hartson)
5. **Mark** each fore-aft position so that there is a visual indication when the seat is at a particular position. For manual seats, **mark** each detent. For power seats, **mark** only the rearmost, middle, and foremost positions. Label three of the positions with the following: F for foremost, M for mid-position (if there is no mid-position, label the closest adjustment position to the rear of the mid-point), and R for rearmost. Determine the mid fore-aft seat position based on the foremost and rearmost positions determined in items 3 and 4. (8/31/95 legal interpretation to Hogan and Hartson)
6. Move the seat to the mid position.
7. While maintaining the mid position, move the seat to its lowest position. **Mark** the height position. For seats with adjustable seat cushions, use the manufacturer's recommended seat cushion angle for determining the lowest height position.
8. Visually **mark** the seat back angle, if adjustable, at the manufacturer's nominal design riding position for a **50th percentile adult male** in the manner specified by the manufacturer.  
 N/A – No seat back angle adjustment  
Manufacturer's design seat back angle: 22° Seat Back Angle
9. Is the seat a bucket seat?  
 Yes, go to 10 and skip 11.  
 No, go to 11 and skip 10.
10. Bucket seats:  
Locate and **mark** for future reference the longitudinal centerline of the seat cushion. The intersection of the vertical longitudinal plane that passes through the SgRP and the seat cushion upper surface determines the longitudinal centerline of a bucket seat cushion. (S10.4.1.2 and S16.3.1.10)

11. Bench seats (complete ONLY the one that is applicable to the seat being marked):
- 11.1 Driver Seat  
Locate and **mark** for future reference the longitudinal line on the seat cushion that marks the intersection of the vertical longitudinal plane through the centerline of the steering wheel and the seat cushion upper surface. (S10.4.1.1)
- 11.2 Passenger Seat  
Locate and **mark** for future reference the longitudinal centerline of the passenger seat cushion. The longitudinal centerline is the same distance from the longitudinal centerline of the vehicle as the center of the steering wheel. (S10.4.1.1)  
Record the distance from the longitudinal centerline of the vehicle to the center of the steering wheel. \_\_\_\_\_  
Record the distance from the longitudinal centerline of the vehicle to the longitudinal centerline of the seat cushion. \_\_\_\_\_
12. Place a 910 mm<sup>2</sup> piece of muslin cotton cloth over the seat area. (The muslin cloth shall be comparable to 48 threads/in<sup>2</sup> and density of 2.85 lb/yd.) Tuck the muslin cloth in a sufficient amount to prevent hammocking of the material.
13. Place the seat and back assembly of the H-Point machine at the centerline of the seat as determined in item 10 or 11.
14. Install the lower leg, and foot segments.
15. Set the length of the lower leg segment at 16.3 inches and the length of the thigh bar at 15.8 inches.
16. Leg and foot placement.
- 16.1 Driver Designated Seating Position.
- 16.1.1 Insert the pin so that the foot angle is never less than 87 degrees.
- 16.1.2 Place the right foot on the undepressed accelerator pedal with the sole of the foot on the pedal and the heel as far forward as allowable. Do not place the heel on the toe board.
- 16.1.3 Adjust the left leg to be the same distance from H-point machine centerline as the right leg.
- 16.1.4 With the T-bar level, place the left foot on the toe board with the rearmost point of the heel resting on the floor pan as close as possible to the point of intersection of the planes described by the toe board and the floor pan and not on the wheel well projection. If the foot cannot be positioned on the toe board, set it on the floor pan.  
 Foot on toe board.  
 Foot on floor pan.
- 16.2 Passenger Designated Seating Position.
- 16.2.1 Insert the pin so that the foot angle is never less than 87 degrees.
- 16.2.2 Space the lower legs 10.6 inches apart, equally spaced about the centerline of the H-point machine.

- X 16.2.3 With the T-bar level, place the left foot on the toe board with the rearmost point of the heel resting on the floor pan as close as possible to the point of intersection of the planes described by the toe board and the floor pan and not on the wheel well projection. If the foot cannot be positioned on the toe board, set it on the floor pan.
- Foot on toe board.
  - Foot on floor pan.
- X 16.2.4 With the T-bar level, place the right foot on the toe board with the rearmost point of the heel resting on the floor pan as close as possible to the point of intersection of the planes described by the toe board and the floor pan and not on the wheel well projection. If the foot cannot be positioned on the toe board, set it on the floor pan.
- Foot on toe board.
  - Foot on floor pan.
- X 17. Apply the lower leg weights.
- X 18. Apply the thigh weights.
- X 19. Tilt the back pan forward against the forward stop and draw the H-point machine away from the seatback using the T-bar.
- X 20. Repositioning the back pan.
- X 20.1 Allow the H-point machine to slide rearward until a forward horizontal restraining load on the T-bar is no longer required due to the seat pan contacting the seat back.
- The seat pan does not slide rearward. Go to 20.2
- 20.2 Slide the H-point machine rearward by a horizontal rearward load applied at the T-bar until the seat pan contacts the seat back.
- X 21. Apply a 10 kg load at the intersection of the hip angle quadrant and the T-bar housing along a line from the above intersection to a point just above the thigh bar housing.
- X 22. Again apply a 10 kg load at the intersection of the hip angle quadrant and the T-bar housing along a line from the above intersection to a point just above the thigh bar housing.
- X 23. Carefully return the back pan to the seat back.
- X 24. Install the right and left buttock weights.
- X 25. Install the eight torso weights alternately the installation between right and left.
- X 26. Tilt the back pan forward until the stop is contacted.
- X 27. Rock the H-point from side to side over a 10 degree arc (5 degrees to each side of the vertical centerline) for three complete cycles. Restrain the T-bar during rocking so that the seat pan does not change position. Minimize any inadvertent exterior loads applied in a vertical or fore-aft direction. The feet are free to move during this rocking motion.
- X 28. Without applying a forward or lateral load lift the right foot off the floor the minimum amount necessary until no additional forward foot movement is obtained.
- X 29. Lower the right foot until the heel is in contact with the floor pan and the ball of the foot is in contact with the floor, toe board, or undepressed accelerator pedal.

- X 30. Without applying a forward or lateral load lift the left foot off the floor the minimum amount necessary until no additional forward foot movement is obtained.
- X 31. Lower the left foot until the heel is in contact with the floor pan and the ball of the foot is in contact with the floor or toe board.
- X 32. Is the seat pan level?  
 Yes. Go to 34  
 No. Go to 33
33. Apply a sufficient lateral load to the top of the seatback pan to level the H-point machine seat pan on the seat.
- X 34. Holding the T-bar to prevent the H-point from sliding forward on the seat cushion, return the seatback pan to the seatback.
- X 35. Holding the T-bar to prevent the H-point from sliding forward on the seat cushion, apply sufficient rearward force perpendicular to the back angle bar just above the torso weights to increase the hip angle 3 degrees. Minimize the exterior downward or side forces applied to the H-point machine. Release the force. Repeat this step until the hip angle readout is identical. Complete as many force applications as necessary and record the results in the following table:

Force Application	Hip Angle
1	94
2	96
3	96
4	
5	

- X 36. Is the H-point machine level?  
 Yes, go to 37.  
 No, relevel. Go back to item 26 and repeat using a new data sheet.

X37. Record the H-point location.  
Describe and mark the measuring reference point.

Passenger H-Point	
HP to Floor Z	167
HP to Hinge X	715
HP to Sill Y	263
HP to Striker X	186
HP to Dash X	503
HP to Header Z	773

H-Point Machine	
Left Knee	127
Right Knee	128
Left Foot Angle	114°
Right Foot Angle	119°
Left Leg	130
Right Leg	130
Hip Angle	96°
Back Angle	22°

Justin Haynes  
I certify that I have read and performed each instruction.

4/28/10

Date

**DATA SHEET 32**

**VEHICLE WEIGHT, FUEL TANK, AND ATTITUDE DATA**

Test Vehicle: 2010 Ford Taurus  
 Test Program: FMVSS 208 Compliance  
 Test Technician: Tim Novak

NHTSA No.: CA0217  
 Test Date: 4/28/10

IMPACT ANGLE:	Zero Degrees					
BELTED DUMMIES (YES/NO):	NO					
TEST SPEED:	X	32 to 40 kmph		0 to 48 kmph		0 to 56 kmph
DRIVER DUMMY:			5 <sup>th</sup> female	X		50 <sup>th</sup> male
PASSENGER DUMMY:			5 <sup>th</sup> female	X		50 <sup>th</sup> male

- X 1. Fill the transmission with transmission fluid to the satisfactory range.
- X 2. Drain fuel from vehicle.
- X 3. Run the engine until fuel remaining in the fuel delivery system is used and the engine stops.
- X 4. Record the useable fuel tank capacity supplied by the COTR.  
Useable Fuel Tank Capacity supplied by COTR: 71.9 liters (19.0 gallons)
- X 5. Record the fuel tank capacity supplied in the owner's manual.  
Useable Fuel Tank Capacity in owner's manual: 71.9 liters (19.0 gallons)
- X 6. Using purple dyed Stoddard solvent having the physical and chemical properties of Type 1 solvent or cleaning fluid, Table 1, ASTM Standard D484-71, "Standard Specifications for Hydrocarbon Dry-cleaning Solvents," or gasoline, fill the fuel tank.  
Amount Added: 71.9 liters (19.0 gallons)
- X 7. Fill the coolant system to capacity.
- X 8. Fill the engine with motor oil to the Max. mark on the dip stick.
- X 9. Fill the brake reservoir with brake fluid to its normal level.
- X 10. Fill the windshield washer reservoir to capacity.
- X 11. Inflate the tires to the tire pressure on the tire placard. If no tire placard is available, inflate the tires to the recommended pressure in the owner's manual.

Tire placard pressure:	RF:	38 psi	LF:	38 psi	RR:	38 psi	LR:	38 psi
Owner's manual pressure:	RF:	38 psi	LF:	38 psi	RR:	38 psi	LR:	38 psi
Actual inflated pressure:	RF:	38 psi	LF:	38 psi	RR:	38 psi	LR:	38 psi

- X 12. Record the vehicle weight at each wheel to determine the unloaded vehicle weight (UVW), i.e. "as delivered" weight).

Right Front (kg):	536.2	Right Rear (kg):	357.0
Left Front (kg):	542.5	Left Rear (kg):	355.2
Total Front (kg):	1078.7	Total Rear (kg):	718.2
% Total Weight:	60.2	% Total Weight:	39.8
UVW = TOTAL FRONT PLUS TOTAL REAR (KG):	1790.9		

- X 13. UVW Test Vehicle Attitude: (All dimensions in millimeters)
- X 13.1 Mark a point on the vehicle above the center of each wheel.
- X 13.2 Place the vehicle on a level surface.
- X 13.3 Measure perpendicular to the level surface to the 4 points marked on the body and record the measurements.

RF:	747	LF:	748	RR:	789	LR:	784
-----	-----	-----	-----	-----	-----	-----	-----

14. Calculate the Rated Cargo and Luggage Weight (RCLW): 90 kg
- 14.1 Does the vehicle have the vehicle capacity weight (VCW) on the certification label or tire placard?
- Yes, go to 14.3
- No, go to 14.2
- 14.2 VCW = Gross Vehicle Weight - UVW
- VCW = \_\_\_\_\_ - \_\_\_\_\_ = \_\_\_\_\_
- 14.3 VCW = 430 kg (950 lbs)
- 14.4 Does the certification or tire placard contain the Designated Seating Capacity (DSC)?
- Yes, go to 14.6
- No, go to 14.5 and skip 14.6
- 14.5 DSC = Total number of seat belt assemblies = \_\_\_\_\_
- 14.6 DSC = 5
- 14.7 RCLW = VCW - (68 kg x DSC) = 430 kg - (68 kg x 5) = 90 kg
- 14.8 Is the vehicle certified as a truck, MPV or bus (see the certification label on the door jamb)?
- Yes, if the calculated RCLW is greater than 136 kg, use 136 kg as the RCLW. (S8.1.1)
- No, use the RCLW calculated in 14.7

15. Fully Loaded Weight (100% fuel fill): 2037.6 kg
- 15.1 Place the appropriate test dummy in both front outboard seating positions.
- Driver:           5<sup>th</sup> female     50th male
- Passenger:      5<sup>th</sup> female     50th male
- 15.2 Load the vehicle with the RCLW from 14.7 or 14.8 whichever is applicable.
- 15.3 Place the RCLW in the cargo area. Center the load over the longitudinal centerline of the vehicle. (S8.1.1 (d))
- 15.4 Record the vehicle weight at each wheel to determine the Fully Loaded Weight.

Right Front (kg):	<u>571.1</u>	Right Rear (kg):	<u>445.4</u>
Left Front (kg):	<u>577.9</u>	Left Rear (kg):	<u>443.2</u>
Total Front (kg):	<u>1149.0</u>	Total Rear (kg):	<u>888.6</u>
% Total Weight:	<u>56.4</u>	% Total Weight:	<u>43.6</u>
% GVW	<u>53.6</u>	% GVW	<u>47.9</u>
(% GVW = Axle GVW divided by Vehicle GVW)			
Fully Loaded Weight = Total Front Plus Total Rear (kg):			<u>2037.6</u>

16. Fully Loaded Test Vehicle Attitude: (All dimensions in millimeters)
- 16.1 Place the vehicle on a level surface.
- 16.2 Measure perpendicular to the level surface to the 4 points marked on the body (see 13.1 above) and record the measurements.

RF:	<u>737</u>	LF:	<u>737</u>	RR:	<u>761</u>	LR:	<u>756</u>
-----	------------	-----	------------	-----	------------	-----	------------

17. Drain the fuel system.
18. Using purple dyed Stoddard solvent having the physical and chemical properties of Type 1 solvent or cleaning fluid, Table 1, ASTM Standard D484-71, "Standard Specifications for Hydrocarbon Dry-cleaning Solvents," fill the fuel tank to 92 - 94 percent of useable capacity. Fuel tank capacity x .94 = 71.9 liters (19.0 gallons) x .94 = 67.6 liters (17.9 gallons)
- Amount added: 66.6 liters (17.6 gallons) 92.6%
19. Crank the engine to fill the fuel delivery system with Stoddard solvent.
20. Calculate the test weight range.
- 20.1 Calculated Weight = UVW (see 12 above) + RCLW (see 14 above) + 2x(dummy weight)
- 2036.9 kg = 1790.9 kg + 90.0 kg + 156.0 kg
- 20.2 Test Weight Range = Calculated Weight (- 4.5 kg, - 9 kg.)
- Max. Test Weight = Calculated Test Weight - 4.5 kg = 2032.4 kg
- Min. Test Weight = Calculated Test Weight - 9 kg = 2027.9 kg

21. Remove the RCLW from the cargo area.
22. Drain transmission fluid, engine coolant, motor oil, and windshield washer fluid from the test vehicle so that Stoddard solvent leakage from the fuel system will be evident.
23. Vehicle Components Removed For Weight Reduction:  
Right Hand Rear Tail Light, Spare Tire, Jack, Tools, Trunk Carpet, Rear Floor Mats
24. Secure the equipment and ballast in the load carrying area and distribute it, as nearly as possible, to obtain the proportion of axle weight indicated by the gross axle weight ratings and center it over the longitudinal centerline of the vehicle.
25. If necessary, add ballast to achieve the actual test weight.  
 N/A  
 Weight of Ballast: 70.8 kg
26. Ballast, including test equipment, must be contained so that it will not shift during the impact event or interfere with data collection or interfere with high-speed film recordings or affect the structural integrity of the vehicle or do anything else to affect test results. Care must be taken to assure that any attachment hardware added to the vehicle is not in the vicinity of the fuel tank or lines.
27. Record the vehicle weight at each wheel to determine the actual test weight.
- |   |        |                  |        |
|---|--------|------------------|--------|
| Right Front (kg):                         | 578.8  | Right Rear (kg): | 426.4  |
| Left Front (kg):                          | 577.0  | Left Rear (kg):  | 449.1  |
| Total Front (kg):                         | 1155.8 | Total Rear (kg): | 875.5  |
| % Total Weight:                           | 57.7   | % Total Weight:  | 43.3   |
| % GVW                                     | 53.9   | % GVW            | 47.1   |
| (% GVW = Axle GVW divided by Vehicle GVW) |        |                  |        |
| TOTAL FRONT PLUS TOTAL REAR (kg):         |        |                  | 2031.3 |
28. Is the test weight between the Max. Weight and the Min. Weight (See 20.2)?  
 Yes  
 No, explain why not.
29. Test Weight Vehicle Attitude: (all dimensions in millimeters)
- 29.1 Place the vehicle on a level surface.
- 29.2 Measure perpendicular to the level surface to the 4 points marked on the body (see 13 above) and record the measurements.
- |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| RF: | 739 | LF: | 741 | RR: | 772 | LR: | 761 |
|-----|-----|-----|-----|-----|-----|-----|-----|
30. Summary of test attitude
- 30.1 AS DELIVERED:
- |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| RF: | 747 | LF: | 748 | RR: | 789 | LR: | 784 |
|-----|-----|-----|-----|-----|-----|-----|-----|
- AS TESTED:
- |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| RF: | 739 | LF: | 741 | RR: | 772 | LR: | 761 |
|-----|-----|-----|-----|-----|-----|-----|-----|
- FULLY LOADED:
- |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| RF: | 737 | LF: | 737 | RR: | 761 | LR: | 756 |
|-----|-----|-----|-----|-----|-----|-----|-----|
- 30.2 Is the "as tested" test attitude equal to or between the "fully loaded" and "as delivered" attitude?  
 Yes  
 No, explain why not.

REMARKS:

Signature: \_\_\_\_\_

*Jim Korak*

Date: 4/28/10

I certify that I have read and performed each instruction.

**DATA SHEET 33**

**VEHICLE ACCELEROMETER LOCATION AND MEASUREMENT**

Test Vehicle: 2010 Ford Taurus  
 Test Program: FMVSS 208 Compliance  
 Test Technician: Tim Novak


NHTSA No.: CA0217  
 Test Date: 4/28/10

IMPACT ANGLE:	Zero Degrees					
BELTED DUMMIES (YES/NO):	NO					
TEST SPEED:	X	32 to 40 kmph		0 to 48 kmph		0 to 56 kmph
DRIVER DUMMY:			5 <sup>th</sup> female	X		50 <sup>th</sup> male
PASSENGER DUMMY:			5 <sup>th</sup> female	X		50 <sup>th</sup> male

- 1. Find the location where the vertical plane parallel to the longitudinal centerline of the vehicle and through the center of the left front outboard seating position intersects the left rear seat cross member. Install an accelerometer at this intersection on the rear seat cross member to record x-direction accelerations. Record the location on the following chart.
- 2. Find the location where the vertical plane parallel to the longitudinal centerline of the vehicle and through the center of the right front outboard seating position intersects the right rear seat cross member. Install an accelerometer at this intersection on the rear seat cross member to record x-direction accelerations. Record the location on the following chart.
- 3. Find the location where a vertical plane through the longitudinal centerline of the vehicle and a vertical transverse plane through the center of the two wheels on opposite sides of the engine intersect at the top of the engine. Install an accelerometer at this intersection to record x-direction accelerations. Record the location on the following chart.
- 4. Find the location where a vertical plane through the longitudinal centerline of the vehicle and a vertical transverse plane through the center of the two wheels on opposite sides of the engine intersect the bottom of the engine. Install an accelerometer at this intersection to record x-direction accelerations. Record the location on the following chart.
- 5. Install an accelerometer on the right front brake caliper to record x-direction accelerations. Record the location on the following chart.
- 6. Find the location where a vertical plane through the longitudinal centerline of the vehicle intersects the top of the instrument panel. Install an accelerometer at this intersection to record x-direction accelerations. Record the location on the following chart.
- 7. Install an accelerometer on the left front brake caliper to record x-direction accelerations. Record the location on the following chart.
- 8. Find the location where a vertical plane through the longitudinal centerline of the vehicle intersects the floor of the trunk. Install an accelerometer on the trunk floor at this intersection to record z-direction accelerations. Record the location on the following chart.

REMARKS:


I certify that I have read and performed each instruction.

Signature: 

Date: 4/28/10

# VEHICLE ACCELEROMETER LOCATION AND DATA SUMMARY


CENTERLINE OF FRONT WHEELS

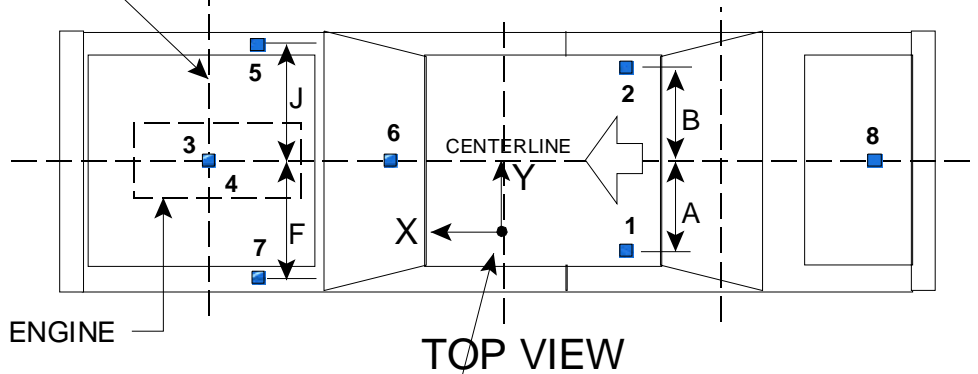

TOP VIEW

ACCELEROMETER COORDINATE SYSTEM (POSITIVE DIRECTION SHOWN)

REAR SEAT CUSHION ASSY. FRONT ATTACHMENT BRACKET SUPPORT

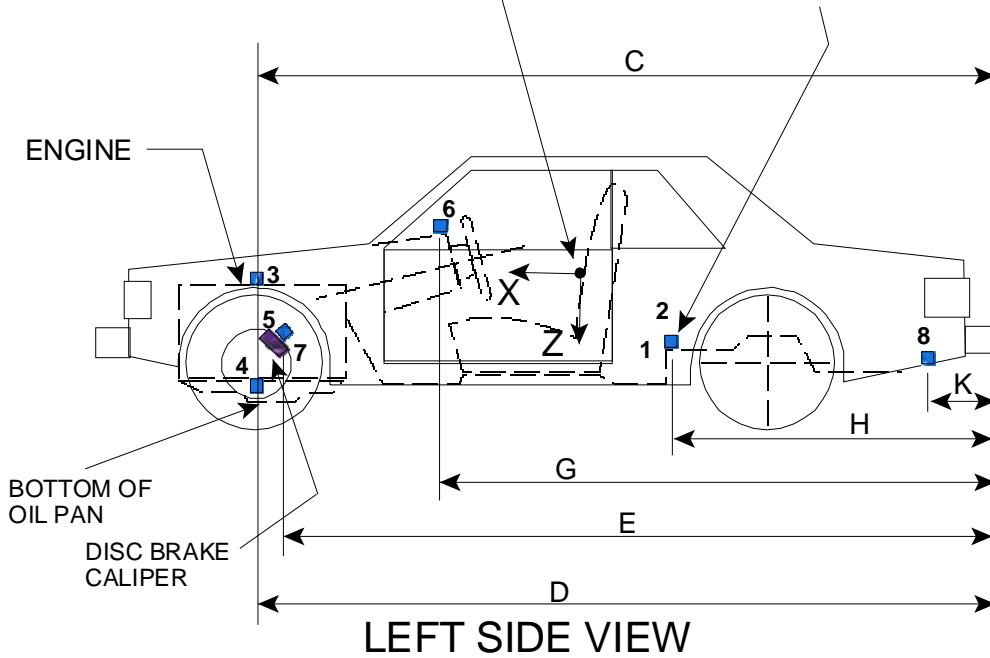

LEFT SIDE VIEW

Dimensions Corresponding To The Letters "A" Through "K" (Excluding "I") Are Recorded In The Table On The Following Page.

Accelerometers Corresponding To The Numbers 1 Through 8 Are Specified On The Preceding Page.

**VEHICLE ACCELEROMETER LOCATION AND MEASUREMENTS**

<u>DIMENSION</u>	<u>LENGTH (mm)</u>	
<u>PRETEST VALUES</u>		
<u>A</u> (LH Rear Seat Xmbr)	350	
<u>B</u> (RH Rear Seat Xmbr)	350	
<u>C</u> (Engine Top)	4214	
<u>D</u> (Engine Bottom)	4305	
<u>E</u> (Caliper)	Right Side: 4190	Left Side: 4190
<u>F</u> (Left Caliper)	723	
<u>G</u> (IP)	3520	
<u>H</u> (Seat)	2185	
<u>J</u> (Right Caliper)	723	
<u>K</u> (Trunk)	1025	
<u>POST TEST VALUES</u>		
<u>A</u> (LH Rear Seat Xmbr)	350	
<u>B</u> (RH Rear Seat Xmbr)	350	
<u>C</u> (Engine Top)	4189	
<u>D</u> (Engine Bottom)	4235	
<u>E</u> (Caliper)	Right Side: 4190	Left Side: 4190
<u>F</u> (Left Caliper)	723	
<u>G</u> (IP)	3518	
<u>H</u> (Seat)	2185	
<u>J</u> (Right Caliper)	723	
<u>K</u> (Trunk)	1025	

**DATA SHEET 34**  
**PHOTOGRAPHIC TARGETS**

Test Vehicle: 2010 Ford Taurus  
 Test Program: FMVSS 208 Compliance  
 Test Technician: Tim Novak

NHTSA No.: CA0217  
 Test Date: 4/28/10

IMPACT ANGLE:	Zero Degrees					
BELTED DUMMIES (YES/NO):	NO					
TEST SPEED:	X	32 to 40 kmph		0 to 48 kmph		0 to 56 kmph
DRIVER DUMMY:			5 <sup>th</sup> female	X		50 <sup>th</sup> male
PASSENGER DUMMY:			5 <sup>th</sup> female	X		50 <sup>th</sup> male

- 1. **FMVSS 208 vehicle targeting requirements** (See Figures 28A and 28B)
- 1.1 Targets A1 and A2 are on flat rectangular panels.
- 1.2 Three circular targets at least 90 mm in diameter and with black and yellow quadrants are mounted at the front on the outboard sides of A1 and A2. The center of each circular target is 100 mm from the one next to it.  
 Distance between targets (mm): 100 mm
- 1.3 Three circular targets at least 90 mm in diameter and with black and yellow quadrants are mounted at the back on the outboard sides of on A1 and A2. The center of each circular target is 100 mm from the one next to it.  
 Distance between targets (mm): 100 mm
- 1.4 The distance between the first circular target at the front of A1 and A2 and the last circular target at the back of A1 and A2 is at least 915 mm.  
 Distance between the first and last circular targets (mm): 915 mm
- 1.5 Firmly fix target A1 on the vehicle roof in the vertical longitudinal plane that is coincident with the midsagittal plane of the driver dummy.
- 1.6 Firmly fix target A2 on the vehicle roof in the vertical longitudinal plane that is coincident with the midsagittal plane of the passenger dummy.
- 1.7 Two circular targets (C1 and C2) at least 90 mm in diameter and with black and yellow quadrants are mounted on the outside of the driver door. The centers of each circular target are at least 610 mm apart.  
 Distance between targets (mm): 610 mm
- 1.8 Two circular targets (C1 and C2) at least 90 mm in diameter and with black and yellow quadrants are mounted on the outside of the passenger door. The centers of each circular target are at least 610 mm apart.  
 Distance between targets (mm): 610 mm
- 1.9 Place tape with squares having alternating colors on the top portion of the steering wheel.
- 1.10 Chalk the bottom portion of the steering wheel.
- 1.11 Is this an offset test?  
 **Yes, continue with this section**  
 **No, go to 2.**
- 1.12 Measure the width of the vehicle.  
 Vehicle width (mm):
- 1.13 Find the centerline of the vehicle. (½ of the vehicle width)
- 1.14 Find the line parallel to the centerline of the vehicle and 0.1 x vehicle width from the centerline of the vehicle.
- 1.15 Apply 25 mm wide tape with alternating black and yellow squares parallel to and on each side of the line found in 1.14. The edge of each tape shall be 50 mm from the line found in 1.14. The tape shall extend from the bottom of the bumper to the front edge of the windshield. (Figure 28D)

- |                                     |       |   |
|-------------------------------------|-------|---|
| <input checked="" type="checkbox"/> | 2.    | <b>Barrier Targeting</b>  |
| <input checked="" type="checkbox"/> | 2.1   | Fix two stationary targets D1 and D2 to the barrier as shown in the Figure 28A. One target is in the vertical longitudinal plane that is coincident with the midsagittal plane of the driver dummy. The other is in the vertical longitudinal plane that is coincident with the midsagittal plane of the passenger dummy. |
| <input checked="" type="checkbox"/> | 2.2   | Targets D1 and D2 are on a rectangular panel.   |
| <input checked="" type="checkbox"/> | 2.3   | Three circular targets at least 90 mm in diameter and with black and yellow quadrants are mounted on the sides of the rectangular panel away from the longitudinal centerline of the vehicle. The center of each circular target is 100 mm from the one next to it.   |
| <input checked="" type="checkbox"/> |       | Distance between circular targets on D1 (mm): <u>100 mm</u>   |
| <input checked="" type="checkbox"/> |       | Distance between circular targets on D2 (mm): <u>100 mm</u>   |
| <input checked="" type="checkbox"/> | 3.    | <b>FMVSS 208 Dummy Targeting Requirements</b>   |
| <input checked="" type="checkbox"/> | 3.1   | Place a circular target with black and yellow quadrants on both sides of the driver dummy head as close as possible to the center of gravity of the head in the x and z direction (relative to the measuring directions of the accelerometers).   |
| <input checked="" type="checkbox"/> | 3.2   | Place a circular target with black and yellow quadrants on both sides of the passenger dummy head as close as possible to the center of gravity of the head in the x and z direction (relative to the measuring directions of the accelerometers).  |
| <input checked="" type="checkbox"/> | 3.3   | Place a circular target with black and yellow quadrants on the outboard shoulder of the driver dummy. Place the target as high up on the arm as possible at the intersection of the arm and shoulder. The sleeve of the shirt on the dummy may be cut to make the target visible, but do not remove any material.         |
| <input checked="" type="checkbox"/> | 3.4   | Place a circular target with black and yellow quadrants on the outboard shoulder of the passenger dummy. Place the target as high up on the arm as possible at the intersection of the arm and shoulder. The sleeve of the shirt on the dummy may be cut to make the target visible, but do not remove any material.      |
| <input checked="" type="checkbox"/> | 4.    | <b>FMVSS 204 Targeting Requirements</b>   |
| <input checked="" type="checkbox"/> | 4.1   | Is an FMVSS 204 indicant test ordered on the "COTR Vehicle Work Order?"   |
| <input type="checkbox"/>            |       | Yes, continue with this form.   |
| <input checked="" type="checkbox"/> |       | No, this form is complete.  |
| <input type="checkbox"/>            | 4.2   | Resection panel (Figure 28C)  |
| <input type="checkbox"/>            | 4.2.1 | The panel deviates no more than 6 mm from perfect flatness when suspended vertically  |
| <input type="checkbox"/>            | 4.2.2 | The 8 targets on the panel are circular targets at least 90 mm in diameter and with black and yellow quadrants.   |
| <input type="checkbox"/>            | 4.2.3 | The center of each of the 4 outer targets are placed within 1 mm of the corners of a square measuring 914 mm on each side.  |
| <input type="checkbox"/>            | 4.2.4 | Locate another square with 228 mm sides and with the center of this square coincident with the center of the 914 mm square.   |
| <input type="checkbox"/>            | 4.2.5 | The center of the 4 inner targets are placed at the midpoints of each of the 228 mm sides.  |
| <input type="checkbox"/>            | 4.3   | Place a circular target at least 90 mm in diameter and with black and yellow quadrants on a material (cardboard, metal, etc.) that can be taped to the top of the steering column.  |
| <input type="checkbox"/>            | 4.4   | Tape the target from 4.3 to the top of the steering column in a manner that does not interfere with the movement of the steering column in a crash.   |

REMARKS:


Signature: \_\_\_\_\_

*Jim Norack*


Date: 4/28/10

I certify that I have read and performed each instruction.


# REFERENCE PHOTO TARGETS

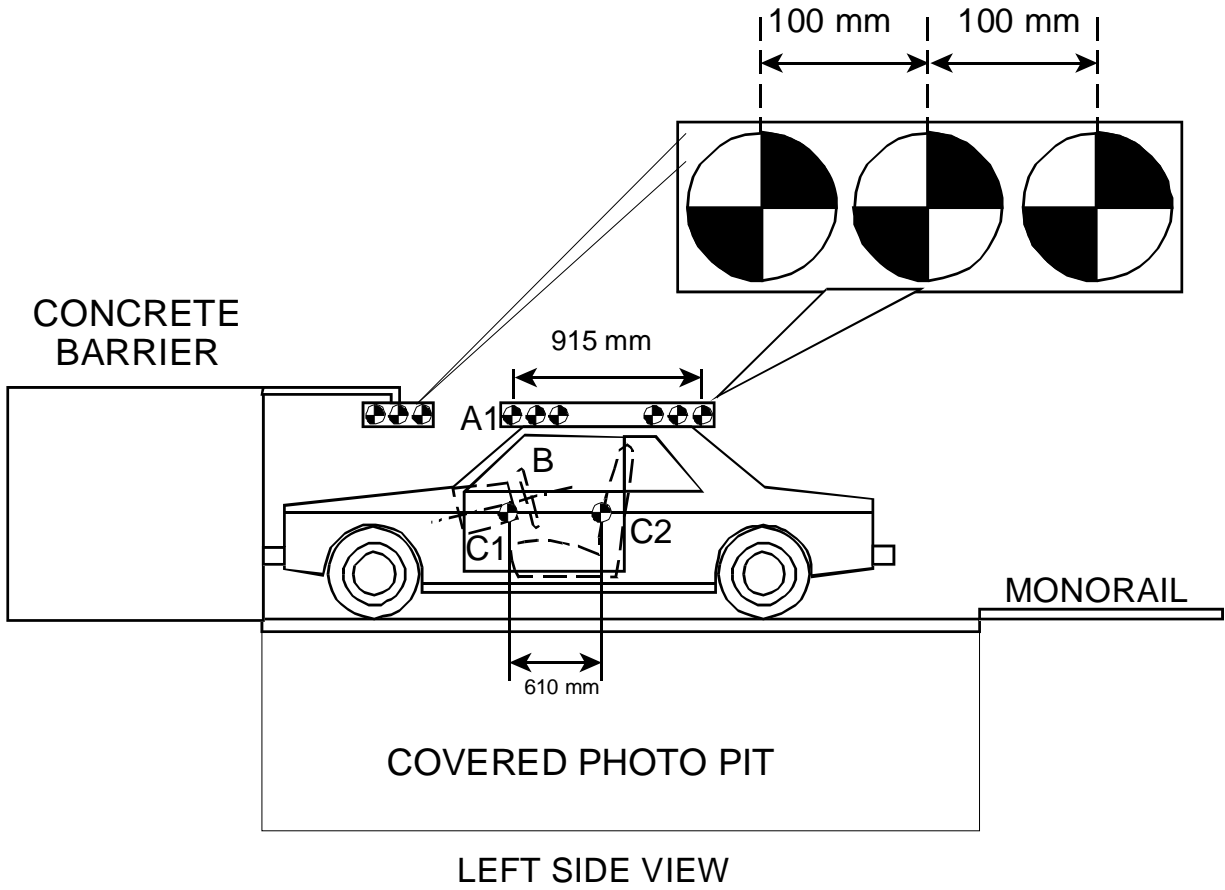


# RESECTION PANEL TARGETING ALIGNMENT

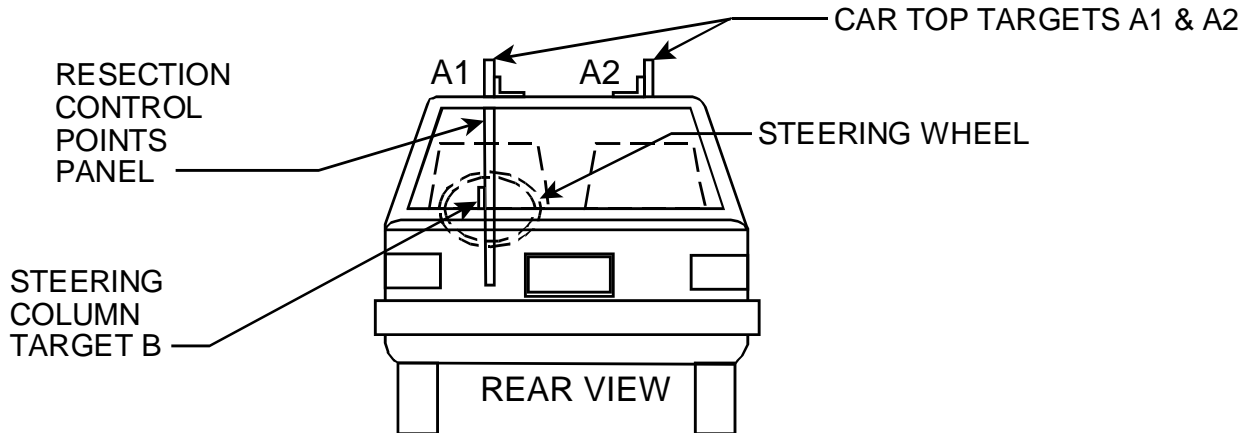

# TEST RUN STEERING COLUMN CAMERA VIEW OF TYPICAL TIME ZERO VEHICLE POSITION

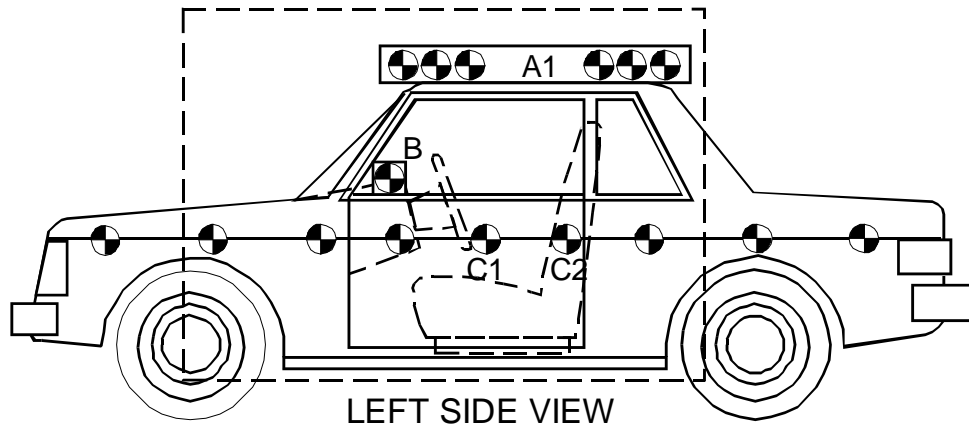

# PRE-RUN STEERING COLUMN HIGH SPEED CAMERA VIEW

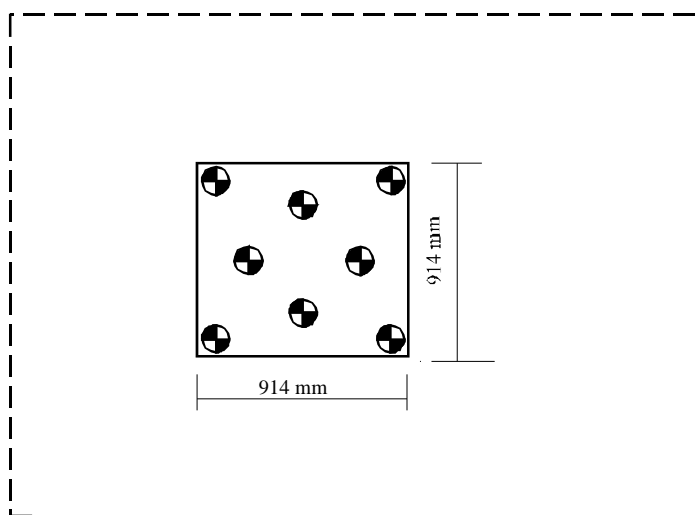

LEFT SIDE VIEW

**DATA SHEET 35**  
**CAMERA LOCATIONS**

Test Vehicle: 2010 Ford Taurus  
Test Program: FMVSS 208 Compliance


NHTSA No.: CA0217  
Test Date: 4/28/10  
Time: 10:04 am

CAMERA NO.	VIEW	CAMERA POSITIONS (mm) *			LENS (mm)	SPEED (fps)
		X	Y	Z		
1	Real Time Left Side View				13	24
2	Left Side View (Barrier face to front seat backs)	1240	-5000	1040	24	1000
3	Left Side View (Driver)	1680	-6090	1600	35	1000
4	Left Side View (B-post aimed toward center of steering wheel)	5480	-4800	1740	50	1000
5	Left Side View (Steering Column)	550	-5150	1250	25	1000
6	Left Side View (Steering Column)	520	-5130	860	25	1000
7	Right Side View (Overall)	2510	6870	1070	20	1000
8	Right Side View (Passenger)	1750	6590	1590	35	1000
9	Right Side View (Angle)	5540	4700	1740	50	1000
10	Right Side View (Front door)	1210	5080	1080	24	1000
11	Front View Windshield	-260	0	2860	24	1000
12	Front View Driver	-30	-360	2270	16	1000
13	Front View Passenger	-30	360	2270	16	1000
14	Overhead Barrier Impact View	2150	0	4910	14	1000
15	Pit Camera Engine View	1290	0	-3150	24	1000
16	Pit Camera Fuel Tank View	3210	0	-3150	24	1000

**\*COORDINATES:**

- +X - forward of impact plane
- +Y - right of monorail centerline
- +Z - above ground level

# CAMERA POSITIONS FOR FMVSS 208

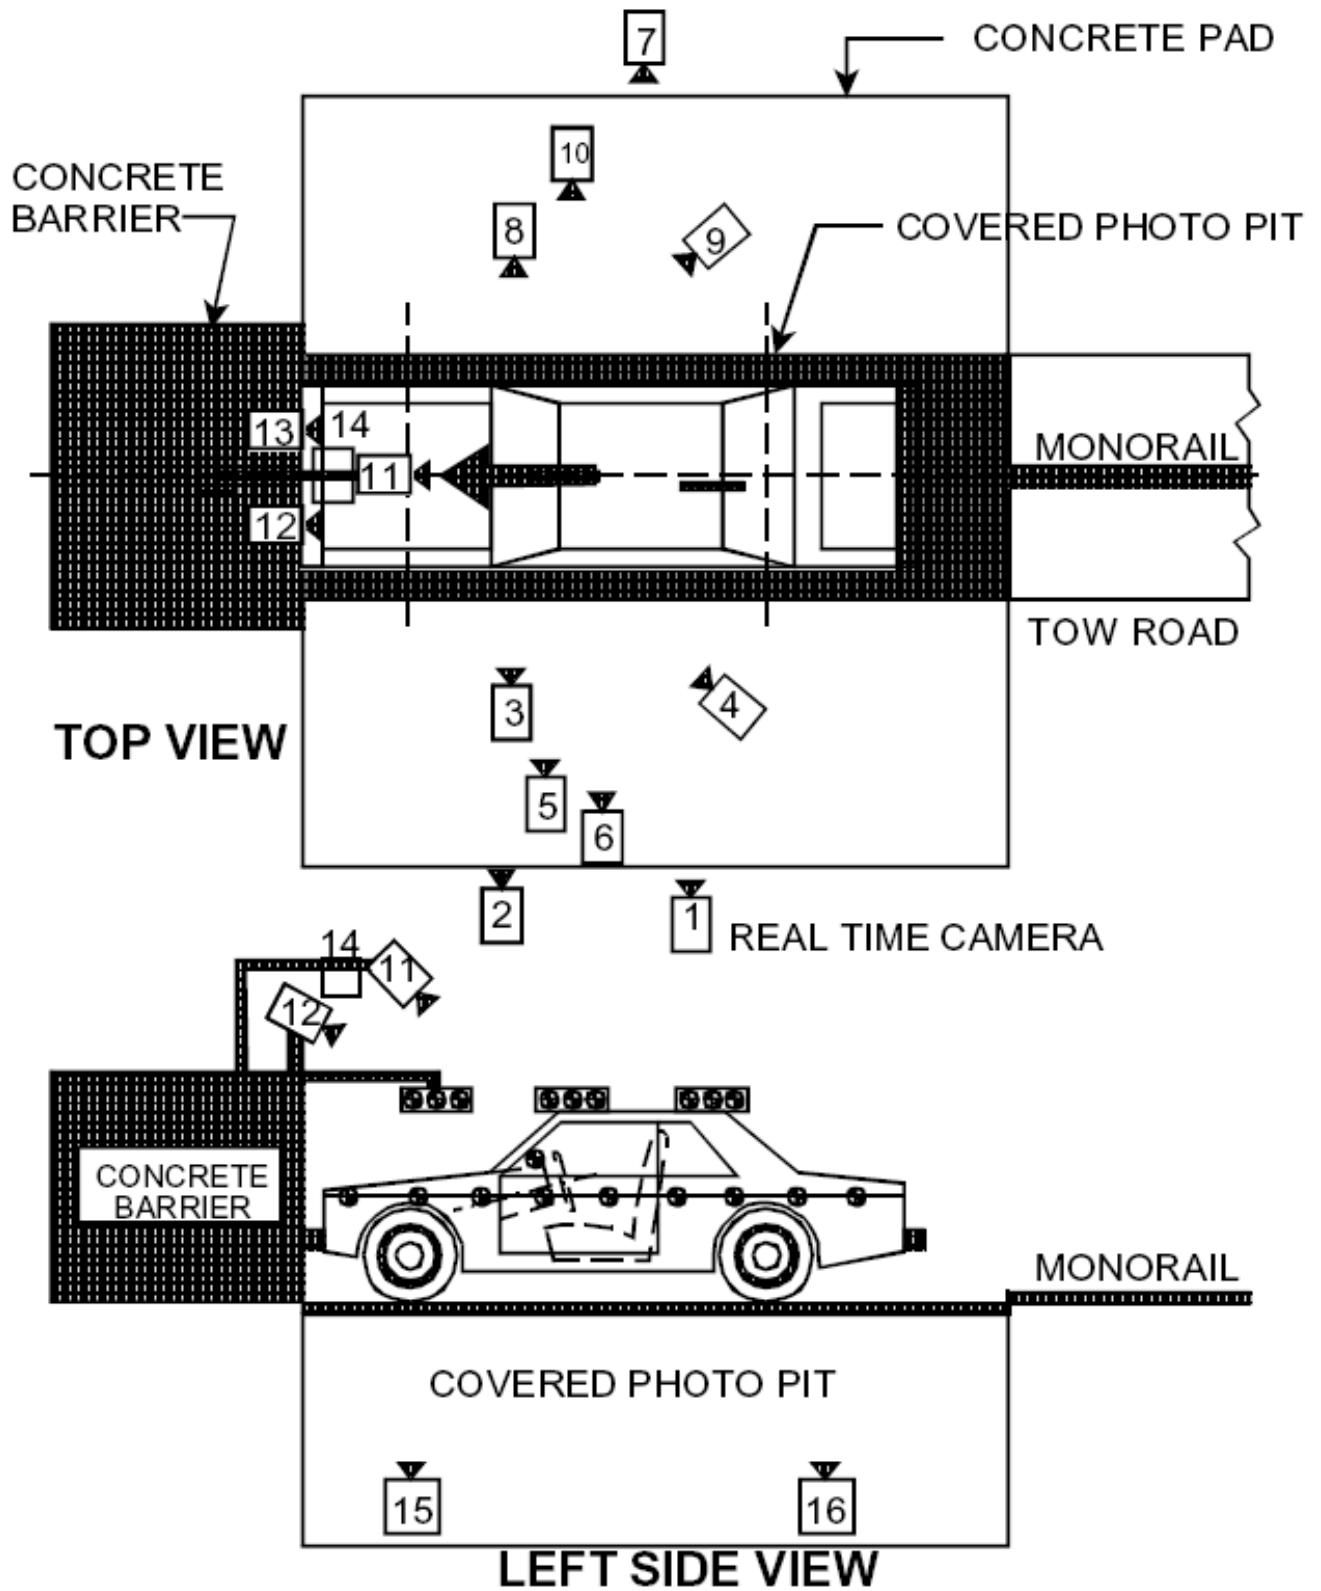

**DATA SHEET 36**

**APPENDIX F**

**DUMMY POSITIONING PROCEDURES FOR DRIVER TEST DUMMY CONFORMING TO  
SUBPART E OF PART 572**

Test Vehicle: 2010 Ford Taurus  
 Test Program: FMVSS 208 Compliance  
 Test Technician: Jordan Haynes

NHTSA No.: CA0217  
 Test Date: 4/28/10

IMPACT ANGLE:	Zero Degrees					
BELTED DUMMIES (YES/NO):	NO					
TEST SPEED:	X	32 to 40 kmph		0 to 48 kmph		0 to 56 kmph
DRIVER DUMMY:			5 <sup>th</sup> female	X		50 <sup>th</sup> male
PASSENGER DUMMY:			5 <sup>th</sup> female	X		50 <sup>th</sup> male

- X 1. Position the seat's adjustable lumbar supports so that the lumbar support is in its lowest, retracted or deflated adjustment position. (S8.1.3)  
 \_\_\_ N/A – No lumbar adjustment.
- X 2. Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2)  
X N/A – No additional support adjustment.
- X 3. Use all the seat controls that have any affect on the fore-aft movement of the seat to move the seat cushion to the rearmost position. **Mark** this position. (8/31/95 legal interpretation to Hogan and Hartson)
- X 4. Use all the seat controls that have any affect on the fore-aft movement of the seat to move the seat cushion to the foremost position. **Mark** this position. (8/31/95 legal interpretation to Hogan and Hartson)
- X 5. **Mark** each fore-aft position so that there is a visual indication when the seat is at a particular position. For manual seats, **mark** each detent. For power seats, **mark** only the rearmost, middle, and foremost positions. Label three of the positions with the following: F for foremost, M for mid-position (if there is no mid-position, label the closest adjustment position to the rear of the mid-point), and R for rearmost. Determine the mid fore-aft seat position based on the foremost and rearmost positions determined in items 3 and 4. (8/31/95 legal interpretation to Hogan and Hartson)
- X 6. Move the seat to the mid position.
- X 7. While maintaining the mid position, move the seat to its lowest position. **Mark** the height position. For seats with adjustable seat cushions, use the manufacturer's recommended seat cushion angle for determining the lowest height position.  
X N/A- No cushion angle adjustment.  
 Manufacturer's seat cushion angle: Full down  
 Tested seat cushion angle: Full down
- X 8. Visually **mark** the seat back angle, if adjustable, at the manufacturer's nominal design riding position for a **50th percentile adult male** in the manner specified by the manufacturer.  
 \_\_\_ N/A – No seat back angle adjustment.  
 Manufacturer's design seat back angle: 22° Seat Back Angle  
 Tested seat back angle: 22° Seat Back Angle

9. Is the seat a bucket seat?  
 Yes, go to 10 and skip 11.  
 No, go to 11 and skip 10.
10. Bucket seats:  
Locate and **mark** the longitudinal centerline of the seat cushion. The intersection of the vertical longitudinal plane that passes through the SgRP and the seat cushion upper surface determines the longitudinal centerline of a bucket seat cushion. (S10.4.1.2 and S16.3.1.10)
11. Bench seats:  
Locate and **mark** the longitudinal line on the seat cushion that marks the intersection of the vertical longitudinal plane through the centerline of the steering wheel and the seat cushion upper surface. (S10.4.1.1)
12. If adjustable, set the head restraint at the full up position. (S8.1.3) If there are adjustments other than vertical, adjust them as recommended by the manufacturer.  
 N/A – No head restraint adjustment.
13. Place any adjustable seat belt anchorages at the vehicle manufacturer's nominal design position for a 50th percentile adult male occupant (S8.1.3)  
 N/A – No adjustable upper seat belt anchorage  
Manufacturer's specified anchorage position: Full up  
Tested anchorage position: Full up
14. Place adjustable pedals in the full forward position.  
 N/A – the pedals are not adjustable.
15. Is the steering wheel adjustable up and down and/or in and out?  
 Yes – go to 16  
 No – go to 19
16. Find and **mark** each up and down position. Label three of the positions with the following: H for highest, M for mid-position (if there is no mid-position, label the next lowest adjustment position), and L for lowest.  
 N/A – steering wheel is not adjustable up and down.
17. Find and **mark** each in and out position. Label three of the positions with the following: F for foremost, M for mid-position (if there is no mid-position, label the next rearmost adjustment position), and R for rearmost.  
 N/A – steering wheel is not adjustable in and out.
18. Set the steering wheel hub at the geometric center of the full range of driving positions including any telescoping positions.
19. Place the dummy in the seat such that the midsagittal plane is coincident with the longitudinal seat cushion markings as determined in item 10 or 11 and the upper torso rests against the seat back. (S10.4.1.1 & S10.4.1.2)
20. Rest the thighs on the seat cushion. (S10.5)

21. Position the H-point of the dummy within 0.5 inch of the vertical dimension and 0.5 inch of the horizontal dimension of a point 0.25 inch below the H-point determined in Data Sheet 15. (S10.4.2.1) Then measure the pelvic angle with respect to the horizontal using the pelvic angle gage. Adjust the dummy position until these three measurements are within the specifications. (S10.4.2.1 and S10.4.2.2)

0.000" horizontal inches from the point 0.25 below the determined H-point (0.5" max.) (S10.4.2.1)

0.236" vertical inches from the point 0.25 below the determined H-point (0.5" max.) (S10.4.2.1)

24.1° pelvic angle (20° to 25°)

22. Is the head level within  $\pm 0.5^\circ$ ? (S10.1)

Yes, go to 23.

No, go to 22.1.

22.1 Adjust the position of the H-point. (S10.1)

22.2 Is the head level within  $\pm 0.5^\circ$ ? (S10.1)

Yes, record the following, then go to 23.  No, go to 22.3

horizontal inches from the point 0.25 below the determined H-point (0.5" max.) (S10.4.2.1)

vertical inches from the point 0.25 below the determined H-point (0.5" max.) (S10.4.2.1)

pelvic angle (20° to 25°) (S10.4.2.2)

22.3 Adjust the pelvic angle. (S10.1)

22.4 Is the head level within  $\pm 0.5^\circ$ ? (S10.1)

Yes, record the following, then go to 23.  No, go to 22.5

0.360" horizontal inches from the point 0.25 below the determined H-point (0.5" max.) (S10.4.2.1)

0.025" vertical inches from the point 0.25 below the determined H-point (0.5" max.) (S10.4.2.1)

24.5° pelvic angle (20° to 25°)

22.5 Adjust the neck bracket of the dummy the minimum amount necessary from the nonadjusted "0" setting until the head is level within  $\pm 0.5^\circ$ . (S10.1) Record the following, then go to 23.

horizontal inches from the point 0.25 below the determined H-point (0.5 inch max.) (S10.4.2.1)

vertical inches from the point 0.25 below the determined H-point (0.5 inch max.) (S10.4.2.1)

pelvic angle (20° to 25°) (S10.4.2.2)

23. Set the distance between the outboard knee clevis flange surfaces at 10.6 inches.

10.6" measured distance (10.6 inches) (S10.5)

24. Can the right foot be placed on the accelerator?

Yes, go to 24.1 and skip 24.2

No, go to 24.2

24.1. To the extent practicable keep the right thigh and the leg in a vertical plane (S10.5) while resting the foot on the undepressed accelerator pedal with the rearmost point of the heel on the floor pan in the plane of the pedal. (S10.6.1.1)

24.2 Initially set the foot perpendicular to the leg and then place it as far forward as possible in the direction of the pedal centerline with the rearmost point of the heel resting on the floor pan. (S10.6.1.1)

24.2.1 Move the adjustable pedal to its most rearward position or until the right foot is flat on the pedal, whichever occurs first. (S10.6.1.1)

N/A – the accelerator pedal is not adjustable.

25. Does the vehicle have a foot rest?

Yes, go to 25.1.

No, go to 25.2.

25.1 With the left thigh and leg in a vertical plane, place the left foot on the foot rest with the heel resting on the floor pan. (S10.6.1.2)

25.1.1 Is the left foot elevated above the right foot?

Yes, go to 25.2 and position the foot off the foot rest.

No, go to 26.

25.2 Check the ONLY one of the following that applies

The left foot reaches the toeboard without adjusting the foot or leg. To the extent practicable keep the left thigh and the leg in a vertical longitudinal plane (S10.5) and place the foot on the toeboard, skip 25.3 (S10.6.1.2).

The left foot reaches the toeboard but contacts the brake or clutch pedal and must be rotated to avoid pedal contact. To the extent practicable keep the left thigh and the leg in a vertical longitudinal plane (S10.5) and place the foot on the toeboard. The foot was rotated about the leg to avoid pedal contact, skip 25.3 (S10.6.1.2).

The left foot reaches the toeboard but contacts the brake or clutch pedal and the foot and leg must be rotated to avoid pedal contact. To the extent practicable keep the left thigh and the leg in a vertical longitudinal plane (S10.5) and place the foot on the toeboard. The foot was rotated about the leg and the leg was rotated outboard about the hip the minimum distance necessary to avoid pedal contact, skip 12.3 (S10.6.1.2).

N/A – the foot does not reach the toeboard, go to 25.3.

25.3 Check the ONLY one of the following that applies.

The left foot did not contact the brake or clutch pedal. To the extent practicable keep the left thigh and the leg in a vertical longitudinal plane (S10.5). Set the foot perpendicular to the leg and place it as far forward as possible with the heel resting on the floor pan. (S10.6.1.2)

The left foot did contact the brake or clutch pedal and the foot was rotated to avoid contact. To the extent practicable keep the left thigh and the leg in a vertical longitudinal plane (S10.5). Set the foot perpendicular to the leg and place it as far forward as possible with the heel resting on the floor pan and rotate the foot the minimum amount to avoid pedal contact. (S10.6.1.2)

The left foot did contact the brake or clutch pedal and the foot was rotated about the leg and the leg was rotated outboard about the hip the minimum distance necessary to avoid pedal contact. Set the foot perpendicular to the leg and place it as far forward as possible with the heel resting on the floor pan and rotate the foot about the leg and the thigh and leg outboard about the hip the minimum distance necessary to avoid pedal contact. (S10.6.1.2)

26. Place the right upper arm adjacent to the torso with the centerline as close to a vertical plane as possible. (S10.2.1)



**DATA SHEET 36**  
**APPENDIX F**  
**DUMMY POSITIONING PROCEDURES FOR PASSENGER TEST DUMMY**  
**CONFORMING TO SUBPART E OF PART 572**

Test Vehicle: 2010 Ford Taurus  
 Test Program: FMVSS 208 Compliance  
 Test Technician: Tim Bratz

NHTSA No.: CA0217  
 Test Date: 4/28/10

IMPACT ANGLE:	Zero Degrees					
BELTED DUMMIES (YES/NO):	NO					
TEST SPEED:	X	32 to 40 kmph		0 to 48 kmph		0 to 56 kmph
DRIVER DUMMY:			5 <sup>th</sup> female	X		50 <sup>th</sup> male
PASSENGER DUMMY:			5 <sup>th</sup> female	X		50 <sup>th</sup> male

- X 1. The seat is a bench seat for which the adjustments have already been made for the driver and there are no independent adjustments that can be made for the passenger. Go to 12.  
X N/A- the passenger seat adjusts independently of the driver seat.
- X 2. Position the seat's adjustable lumbar supports so that the lumbar support is in its lowest, retracted or deflated adjustment position. (S8.1.3)  
X N/A – No lumbar adjustment
- X 3. Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position. (S16.2.10.2)  
X N/A – No additional support adjustment
- X 4. Use all the seat controls that have any affect on the fore-aft movement of the seat to move the seat cushion to the rearmost position. **Mark** this position. (8/31/95 legal interpretation to Hogan and Hartson)
- X 5. Use all the seat controls that have any affect on the fore-aft movement of the seat to move the seat cushion to the foremost position. **Mark** this position. (8/31/95 legal interpretation to Hogan and Hartson)
- X 6. **Mark** each fore-aft position so that there is a visual indication when the seat is at a particular position. For manual seats, **mark** each detent. For power seats, **mark** only the rearmost, middle, and foremost positions. Label three of the positions with the following: F for foremost, M for mid-position (if there is no mid-position, label the closest adjustment position to the rear of the mid-point), and R for rearmost. Determine the mid fore-aft seat position based on the foremost and rearmost positions determined in items 3 and 4. (8/31/95 legal interpretation to Hogan and Hartson)
- X 7. Move the seat to the mid position.
- X 8. While maintaining the mid position, move the seat to its lowest position. **Mark** the height position. For seats with adjustable seat cushions, use the manufacturer's recommended seat cushion angle for determining the lowest height position.  
X N/A- No cushion angle adjustment  
 Manufacturers seat cushion angle: \_\_\_\_\_  
 Tested seat cushion angle: \_\_\_\_\_

9. Visually **mark** the seat back angle, if adjustable, at the manufacturer's nominal design riding position for a **50th percentile adult male** in the manner specified by the manufacturer.  
 N/A – No seat back angle adjustment  
 Manufacturer's design seat back angle: 22° Seat Back Angle
10. Is the seat a bucket seat?  
 Yes, go to 11 and skip 12.  
 No, go to 12 and skip 11.
11. Bucket seats:  
 Locate and **mark** for future reference the longitudinal centerline of the seat cushion. The intersection of the vertical longitudinal plane that passes through the SgRP and the seat cushion upper surface determines the longitudinal centerline of a bucket seat cushion. (S10.4.1.2 and S16.3.1.10)
12. Bench seats:  
 Locate and **mark** for future reference the longitudinal centerline of the passenger seat cushion. The longitudinal centerline is the same distance from the longitudinal centerline of the vehicle as the center of the steering wheel. (S10.4.1.1)  
 Record the distance from the longitudinal centerline of the vehicle to the center of the steering wheel. \_\_\_\_\_  
 Record the distance from the longitudinal centerline of the vehicle to the longitudinal centerline of the seat cushion. \_\_\_\_\_
13. If adjustable, set the head restraint at the full up position. (S8.1.3) If there are adjustments other than vertical, adjust them as recommended by the manufacturer.  
 N/A – No head restraint adjustment.
14. Place any adjustable seat belt anchorages at the vehicle manufacturer's nominal design position for a 50th percentile adult male occupant (S8.1.3)  
 N/A – No adjustable upper seat belt anchorage.  
 Manufacturer's specified anchorage position: Full up  
 Tested anchorage position: Full up
15. Place the dummy in the seat such that the midsagittal plane is coincident with the longitudinal seat cushion markings as determined in item 11 or 12 and the upper torso rests against the seat back. (S10.4.1.1 & S10.4.1.2)
16. Rest the thighs on the seat cushion. (S10.5)
17. Position the H-point of the dummy within 0.5 inch of the vertical dimension and 0.5 inch of the horizontal dimension of a point 0.25 inch below the H-point determined by using the equipment and procedures specified in SAE J826 (APR 1980). (S10.4.2.1) Then measure the pelvic angle with respect to the horizontal using the pelvic angle gage. Adjust the dummy position until these three measurements are within the specifications. (S10.4.2.1 and S10.4.2.2)  
0.108" horizontal inches from the point 0.25 below the determined H-point (0.5" max.) (S10.4.2.1)  
0.150" vertical inches from the point 0.25 below the determined H-point (0.5" max.) (S10.4.2.1)  
24.2° pelvic angle (20° to 25°)
18. Is the head level within  $\pm 0.5^\circ$ ? (S10.1)  
 Yes, go to 19.  
 No, go to 18.1.

18.1 Adjust the position of the H-point. (S10.1 and S10.4.2.1)

18.2 Is the head level within  $\pm 0.5^\circ$ ? (S10.1)

Yes, record the following, then go to 19.  No, go to 18.3

horizontal inches from the point 0.25 below the determined H-point (0.5 inch max.) (S10.4.2.1)

vertical inches from the point 0.25 below the determined H-point (0.5 inch max.) (S10.4.2.1)

pelvic angle ( $20^\circ$  to  $25^\circ$ ) (S10.4.2.2)

18.3 Adjust the pelvic angle. (S10.1)

18.4 Is the head level within  $\pm 0.5^\circ$ ? (S10.1)

Yes, record the following, then go to 19.  No, go to 18.5

horizontal inches from the point 0.25 below the determined H-point (0.5 inch max.) (S10.4.2.1)

vertical inches from the point 0.25 below the determined H-point (0.5 inch max.) (S10.4.2.1)

pelvic angle ( $20^\circ$  to  $25^\circ$ ) (S10.4.2.2)

18.5 Adjust the neck bracket of the dummy the minimum amount necessary from the nonadjusted "0" setting until the head is level within  $\pm 0.5^\circ$ . (S10.1) Record the following, then go to 19.

NECK BRACKET ADJUSTED 2 NOTCHES

0.315" horizontal inches from the point 0.25 below the determined H-point (0.5" max.) (S10.4.2.1)

0.132" vertical inches from the point 0.25 below the determined H-point (0.5" max.) (S10.4.2.1)

24.1° pelvic angle ( $20^\circ$  to  $25^\circ$ )(S10.4.2.2)

19. Set the distance between the outboard knee clevis flange surfaces at 10.6 inches.

10.6" measured distance (10.6 inches) (S10.5)

20. Check the only one of the following that applies:

To the extent practicable keep the left thigh and leg in a vertical plane and the right thigh and leg in a vertical plane, place the feet on the toeboard with the heels resting on the floor pan as close as possible to the intersection of the floor pan and toeboard.

The feet cannot be placed flat on the toeboard. To the extent practicable keep the left thigh and leg in a vertical plane and the right thigh and leg in a vertical plane, set the feet perpendicular to the legs and place them as far forward as possible with the heels resting on the floor pan.

The vehicle has a wheelhouse projection. To the extent practicable keep the left thigh and leg in a vertical plane and the right thigh and leg in a vertical plane, set the feet perpendicular to the legs and place them as far forward as possible with the heels resting on the floor pan. Do not set the feet on the wheelhouse projection.

The vehicle has a wheelhouse projection and the feet cannot be placed on the toeboard. To the extent practicable keep the left thigh and leg in a vertical plane and the right thigh and leg in a vertical plane, set the feet perpendicular to the legs and place them as far forward as possible with the heel resting on the floor pan. Do not set the feet on the wheelhouse projection.

21. Place the left upper arm in contact with the seat back and side of the torso. (S10.2.2)

22. Is the passenger seat belt used for this test?

Yes, continue

No, go to 23

22.1 Fasten the seat belt around the dummy.

22.2 Remove all slack from the lap belt portion. (S10.9)

22.3 Pull the upper torso webbing out of the retractor and allow it to retract; repeat this four times.(S10.9)

22.4 Apply a 2 to 4 pound tension load to the lap belt. (S10.9)  
\_\_\_\_\_ pound load applied

22.5 Is the belt system equipped with a tension relieving device?

Yes, continue

No, go to 23

22.6 Introduce the maximum amount of slack into the upper torso bet that is recommended by the vehicle manufacturer in the vehicle owner's manual. (S10.9). Go to 23.

23. Place the right upper arm in contact with the seat back and side of the torso. (S10.2.2)

24. Place the left hand palm in contact with the outside of the left thigh and the little finger in contact with the seat cushion. (S10.3.2)

25. Place the right hand palm in contact with the outside of the right thigh and the little finger in contact with the seat cushion. (S10.3.2)

  
\_\_\_\_\_  
I certify that I have read and performed each instruction.

4/28/10

Date


# DATA SHEET 37

## DUMMY MEASUREMENTS

Test Vehicle: 2010 Ford Taurus  
 Test Program: FMVSS 208 Compliance  
 Test Technician: Jordan Haynes

NHTSA No.: CA0217  
 Test Date: 4/28/10


### DUMMY MEASUREMENTS FOR FRONT SEAT OCCUPANTS

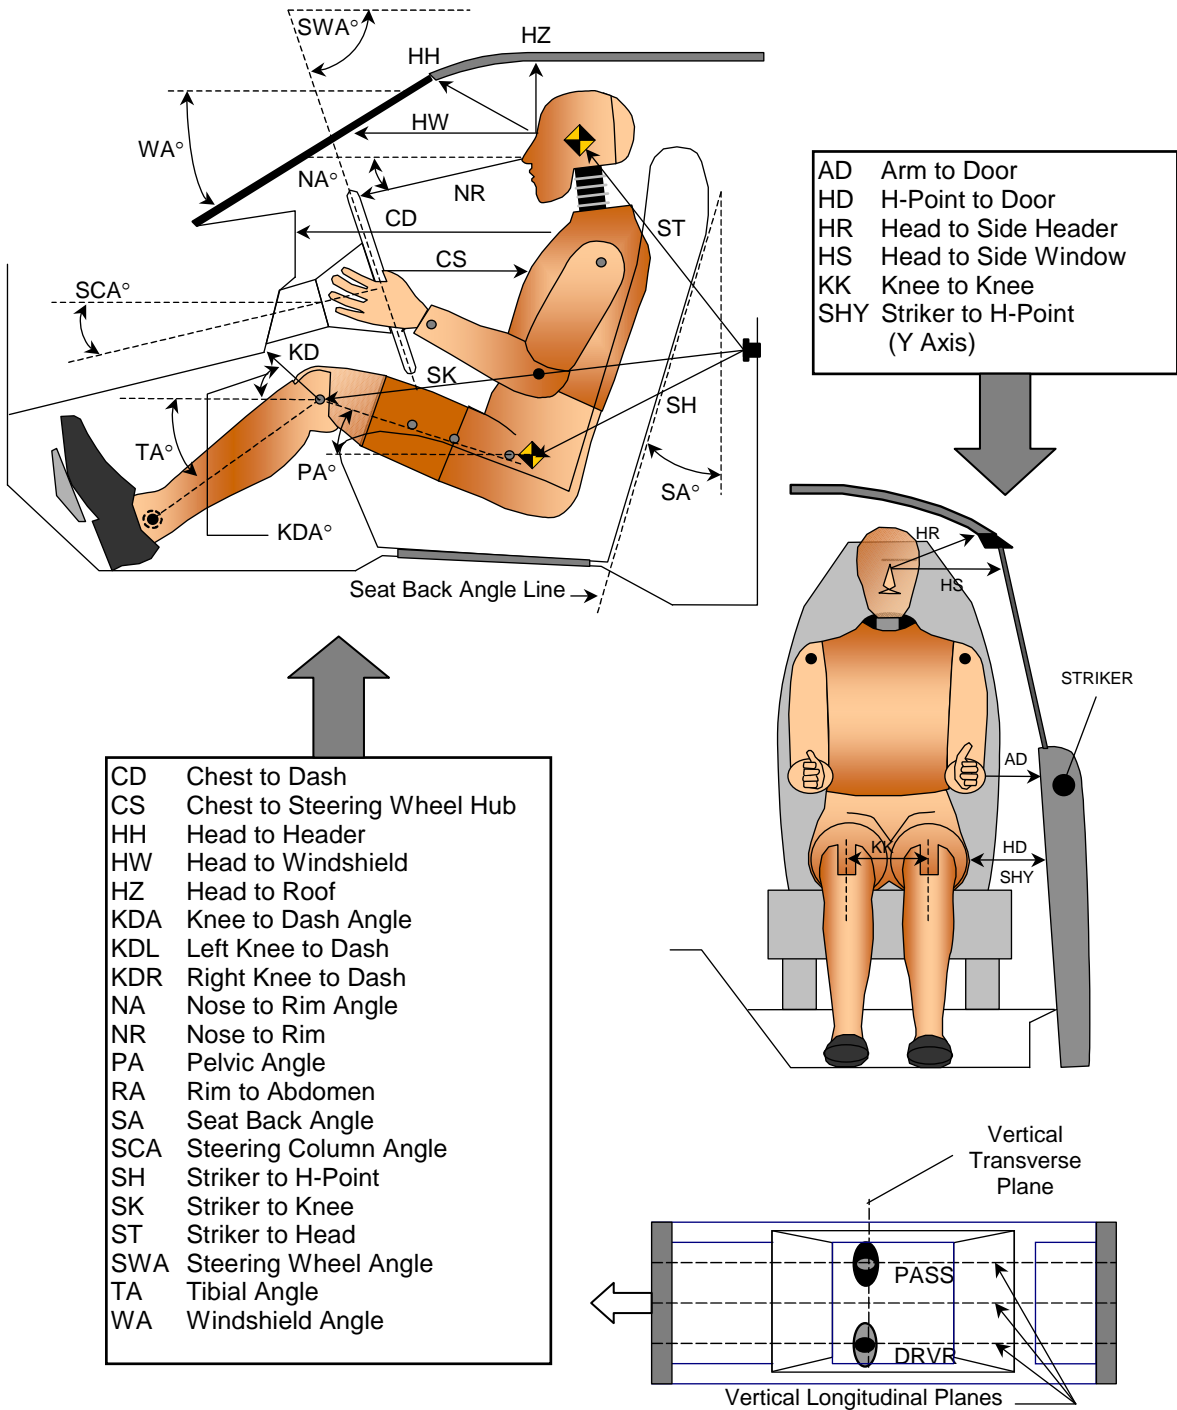

**TEST DUMMY POSITION MEASUREMENTS**

Code	Measurement Description	Driver SN 401		Passenger SN 403	
		Length (mm)	Angle (°)	Length (mm)	Angle (°)
WA	Windshield Angle		24.1		
SWA	Steering Wheel Angle		67.2		
SCA	Steering Column Angle		22.8		
SA	Seat Back Angle		21.8		22.1
HZ	Head to Roof (Z)	229		223	
HH	Head to Header	412	24.8	384	24.1
HW	Head to Windshield	724	0.0	684	0.0
HR	Head to Side Header (Y)	234		233	
NR	Nose to Rim	387	11.9		
CD	Chest to Dash	568		462	
CS	Chest to Steering Hub	324	5.7		
RA	Rim to Abdomen	89	0.0		
KDL	Left Knee to Dash	164	25.9	160	
KDR	Right Knee to Dash	150		164	31.4
PA	Pelvic Angle		24.5		24.1
TA	Tibia Angle		52.6		46.7
KK	Knee to Knee (Y)	333		272	
SK	Striker to Knee	563	93.2	568	97.7
ST	Striker to Head	496	10.0	510	8.8
SH	Striker to H-Point	253	133.1	235	130.3
SHY	Striker to H-Point (Y)	292		286	
HS	Head to Side Window	381		378	
HD	H-Point to Door (Y)	158		158	
AD	Arm to Door (Y)	140		146	
AA	Ankle to Ankle	315		233	

# SEAT BELT POSITIONING DATA

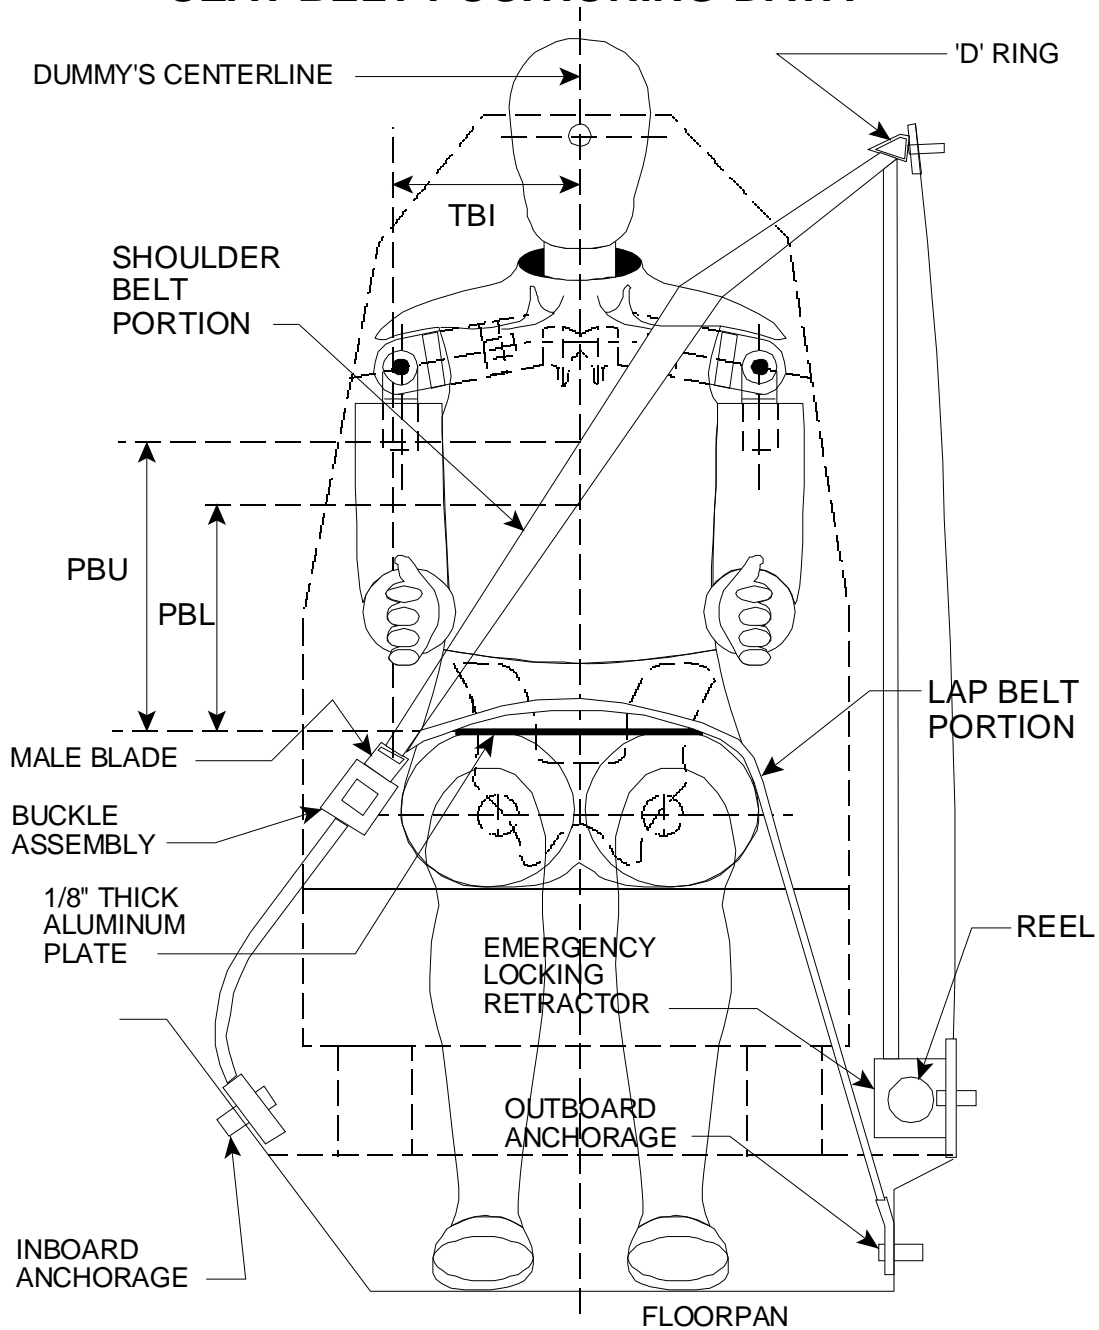

## FRONT VIEW OF DUMMY

### SEAT BELT POSITIONING MEASUREMENTS

Measurement Description	Units	Driver	Passenger
PBU - Top surface of reference to belt upper edge	mm	N/A	N/A
PBL - Top surface of reference to belt lower edge	mm	N/A	N/A

## DATA SHEET 38

### CRASH TEST

Test Vehicle: 2010 Ford Taurus  
 Test Program: FMVSS 208 Compliance  
 Test Technician: Jordan Haynes

NHTSA No.: CA0217  
 Test Date: 4/28/10

IMPACT ANGLE:	Zero Degrees			
BELTED DUMMIES (YES/NO):	NO			
TEST SPEED:	<input checked="" type="checkbox"/> 32 to 40 kmph	<input type="checkbox"/> 0 to 48 kmph	<input type="checkbox"/> 0 to 56 kmph	
DRIVER DUMMY:		5 <sup>th</sup> female	<input checked="" type="checkbox"/>	50 <sup>th</sup> male
PASSENGER DUMMY:		5 <sup>th</sup> female	<input checked="" type="checkbox"/>	50 <sup>th</sup> male

- 1. Vehicle underbody painted.
- 2. The speed measuring devices are in place and functioning.
- 3. The speed measuring devices are 1.0 m from the barrier (spec. 1.5 m) and 30 cm from the barrier (spec. is 30 cm).
- 4. Convertible top is in the closed position.
  - N/A, not a convertible.
- 5. Instrumentation and wires are placed so motion of dummies during impact is not affected.
- 6. Tires inflated to pressure on tire placard or if it does not have a tire placard because it is not a passenger car, then inflated to the tire pressure specified in the owner information.
  - 260 kpa front left tire    260 kpa specified on tire placard or in owner information
  - 260 kpa front right tire    260 kpa specified on tire placard or in owner information
  - 260 kpa rear left tire    260 kpa specified on tire placard or in owner information
  - 260 kpa rear right tire    260 kpa specified on tire placard or in owner information
- 7. Time zero contacts on barrier in place.
- 8. Pre test zero and shunt calibration adjustments performed and recorded.
- 9. Dummy temperature meets requirements of section 12.2 of the test procedure.
- 10. Vehicle hood closed and latched.
- 11. Transmission placed in neutral.
- 12. Parking brake off.
- 13. Are the heads still level?
  - Yes, go to 14
  - No, Adjust dummy so that head is at the angle recorded in the Appendix F or G data sheets and then continue.
- 14. Ignition in the ON position.
- 15. Doors closed and latched but not locked.
- 16. Post test zero and shunt calibration checks performed and recorded.
- 17. Actual test speed: 39.8 kmph
- 18. Vehicle rebound from the barrier: 492 cm
- 19. Describe whether the doors open after the test and what method is used to open the doors.
  - Left Front Door: Door remained closed and latched; Door opened without tools.
  - Right Front Door: Door remained closed and latched; Door opened without tools.
  - Left Rear Door: Door remained closed and latched; Door opened without tools.
  - Right Rear Door: Door remained closed and latched; Door opened without tools.
- 20. Describe the contact points of the dummy with the interior of the vehicle.
  - Driver Dummy: Head to Air Bag, Windshield, and Header; Chest to Air Bag; Knees to Knee Bolster.
  - Passenger Dummy: Head to Air Bag, Header, Visor, and A Pillar; Chest to Air Bag; Knees to Glove Box.

REMARKS:

Signature: *Jordan Haynes*                      Date: 4/28/10

I certify that I have read and performed each instruction.

**DATA SHEET 40**

**ACCIDENT INVESTIGATION MEASUREMENTS**

Test Vehicle: 2010 Ford Taurus  
 Test Program: FMVSS 208 Compliance  
 Test Technician: Tim Novak

NHTSA No.: CA0217  
 Test Date: 4/28/10

IMPACT ANGLE:	Zero Degrees					
BELTED DUMMIES (YES/NO):	NO					
TEST SPEED:	X	32 to 40 kmph		0 to 48 kmph		0 to 56 kmph
DRIVER DUMMY:			5 <sup>th</sup> female	X		50 <sup>th</sup> male
PASSENGER DUMMY:			5 <sup>th</sup> female	X		50 <sup>th</sup> male

Vehicle Year/Make/Model/Body Style:	2010 Ford Taurus Passenger Car
VIN:	1FAHP2DW7AG116528
Wheelbase:	2868 mm
Build Date:	9/09
Vehicle Size Category:	4
Test Weight:	2031.3 kg
Front Overhang:	1040 mm
Overall Width:	1933 mm
Overall Length Center:	5105 mm


Accelerometer Data	
Location:	As per measurements on Data Sheet 33
Linearity:	>99.9%

Integration Algorithm:	Trapezoidal
Vehicle Impact Speed:	39.8 kmph
Time of Separation:	114.7 ms
Velocity Change:	43.9 kmph

## CRUSH PROFILE

Collision Deformation Classification: 12FDEW2  
 Midpoint of Damage: Vehicle Longitudinal Centerline  
 Damage Region Length (mm): 1466  
 Impact Mode: Frontal Barrier

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
C1	Crush zone 1 at left side	mm	4897	4668	229
C2	Crush zone 2 at left side	mm	5013	4698	315
C3	Crush zone 3 at left side	mm	5075	4721	354
C4	Crush zone 4 at right side	mm	5074	4714	360
C5	Crush zone 5 at right side	mm	5010	4721	289
C6	Crush zone 6 at right side	mm	4895	4687	208

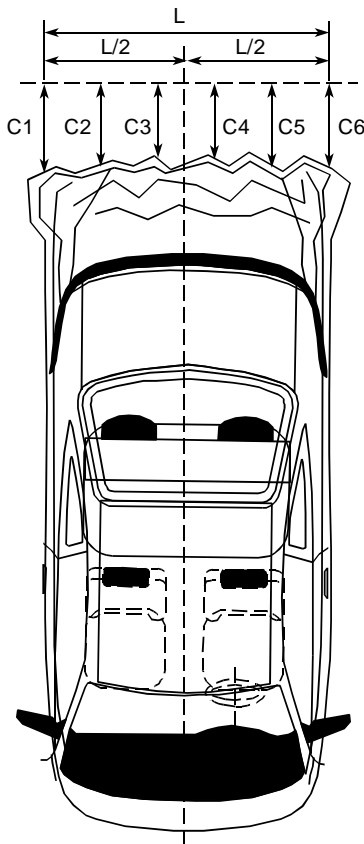

REMARKS:

Signature: *Jim Norick*

Date: 4/28/10

I certify that I have read and performed each instruction.

**DATA SHEET 41**  
**WINDSHIELD MOUNTING (FMVSS 212)**

Test Vehicle: 2010 Ford Taurus  
 Test Program: FMVSS 208 Compliance  
 Test Technician: Tim Novak

NHTSA No.: CA0217  
 Test Date: 4/28/10

IMPACT ANGLE:	Zero Degrees					
BELTED DUMMIES (YES/NO):	NO					
TEST SPEED:	<input checked="" type="checkbox"/>	32 to 40 kmph	<input type="checkbox"/>	0 to 48 kmph	<input type="checkbox"/>	0 to 56 kmph
DRIVER DUMMY:			5 <sup>th</sup> female	<input checked="" type="checkbox"/>	50 <sup>th</sup> male	
PASSENGER DUMMY:			5 <sup>th</sup> female	<input checked="" type="checkbox"/>	50 <sup>th</sup> male	

1. Pre-Crash
- 1.1 Describe from visual inspection how the windshield is mounted and describe any trim material.
- Retained with glue  
Rubber and plastic trim
- 1.2 Mark the longitudinal centerline of the windshield.
- 1.3 Measure pre-crash A, B, and C for the left side and record in the chart below.
- 1.4 Measure pre-crash C, D, and E for the right side and record in the chart below.
- 1.5 Measure from the edge of the retainer or molding to the edge of the windshield.
- Dimension G (mm): 8 mm
2. Post Crash
- 2.1 Can a single thickness of copier type paper (as small a piece as necessary) slide between the windshield and the vehicle body?
- No - Pass. Skip to the table of measurements, complete it by repeating the pre-crash measurements in the post crash column, and calculate the retention percentage, which will be 100%.
- Yes, go to 2.2
- 2.2 Visibly mark the beginning and end of the portions of the periphery where the paper slides between the windshield and the vehicle body.
- 2.3 Measure and record post-crash A, B, C, D, E, and F such that the measurements do not include any of the parts of the windshield where the paper slides between the windshield and the vehicle body.
- 2.4 Calculate and record the percent retention for the right and left side of the windshield.
- 2.5 Is total right side percent retention less than 75%?
- Yes, Fail
- No, Pass
- 2.6 Is total left side percent retention less than 75%?
- Yes, Fail
- No, Pass


### WINDSHIELD RETENTION MEASUREMENTS

	Dimension	Pre-Crash (mm)	Post-Crash (mm)	Percent Retention (Post-Test ÷ Pre-Crash)
Left Side	A	630	630	100%
	B	710	710	100%
	C	812	812	100%
	Total	2152	2152	100%
Right Side	D	630	630	100%
	E	710	710	100%
	F	812	812	100%
	Total	2152	2152	100%

Indicate area of mounting failure: NONE

### FRONT VIEW OF WINDSHIELD

INDICATE WIDTH OF MOLDING

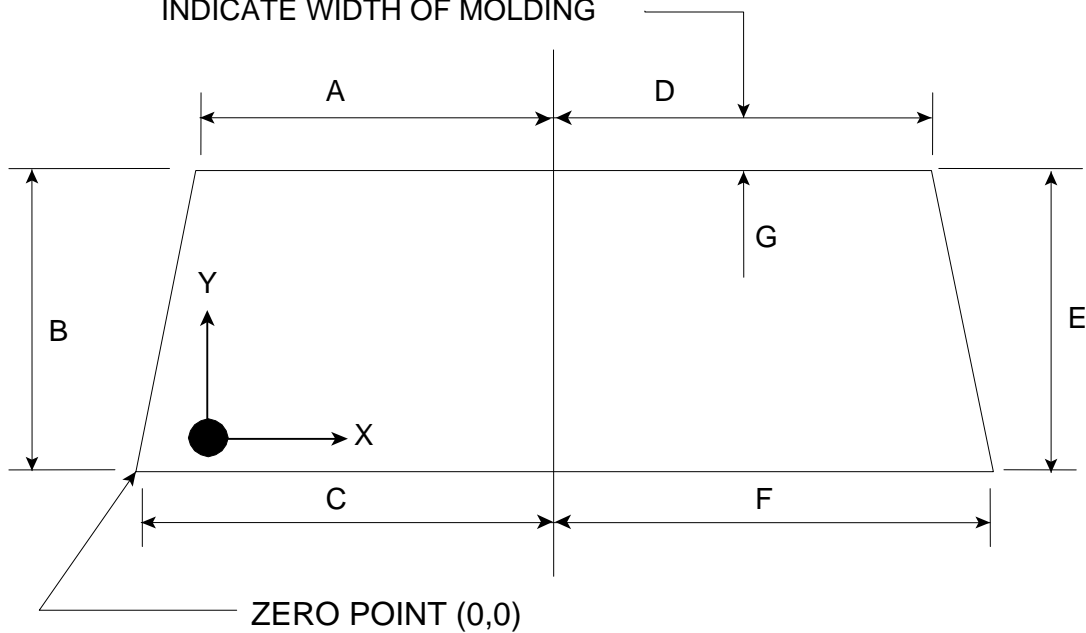

REMARKS:

Signature: *Jim Norak*

Date: 4/28/10

I certify that I have read and performed each instruction.

**DATA SHEET 42**  
**WINDSHIELD ZONE INTRUSION (FMVSS 219)**

Test Vehicle: 2010 Ford Taurus  
 Test Program: FMVSS 208 Compliance  
 Test Technician: Tim Novak


NHTSA No.: CA0217  
 Test Date: 4/28/10

IMPACT ANGLE:	Zero Degrees			
BELTED DUMMIES (YES/NO):	NO			
TEST SPEED:	X	32 to 40 kmph		0 to 56 kmph
DRIVER DUMMY:		5 <sup>th</sup> female	X	50 <sup>th</sup> male
PASSENGER DUMMY:		5 <sup>th</sup> female	X	50 <sup>th</sup> male

This standard specifies limits for the displacement of vehicle components into the windshield area during a frontal barrier impact test at any speed up to and including 48 kmph.

- X 1. Place a 165 mm diameter rigid sphere, with a mass of 6.8 kg on the instrument panel so that it is simultaneously touching the instrument panel and the windshield. (571.219 S6.1(a))
- X 2. Roll the sphere from one side of the windshield to the other while marking on the windshield where the sphere contacts the windshield. (571.219 S6.1(b))
- X 3. From the outermost contactable points on the windshield draw a horizontal line to the edges of the windshield. (571.219 S6.1(b))
- X 4. Draw a line on the inner surface of the windshield that is 13 mm below the line determined in items 2 and 3.
- X 5. After the crash test, record any points where a part of the exterior of the vehicle has marked, penetrated, or broken the windshield.

Provide all dimensions necessary to reproduce the protected area.

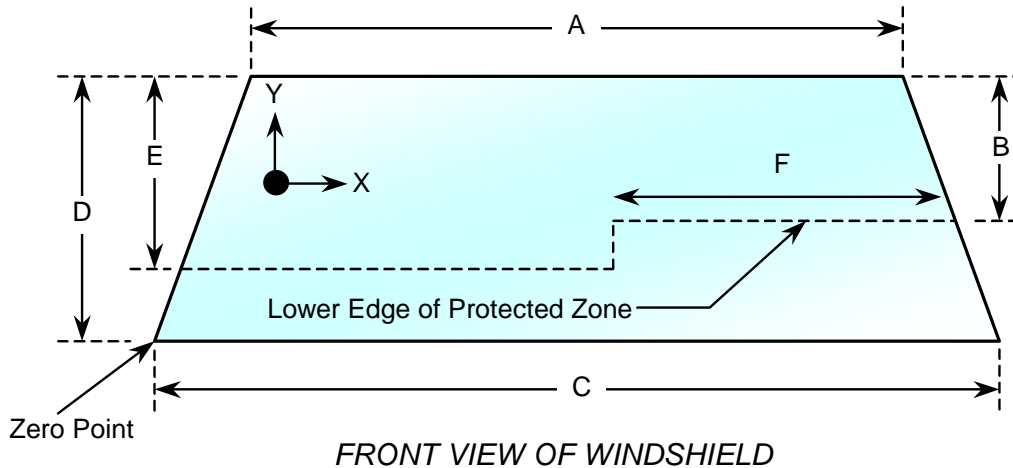

**WINDSHIELD DIMENSIONS**

Item	Units	Value
A	mm	1260
B	mm	423
C	mm	1624
D	mm	710
E	mm	420
F	mm	652

**AREA OF PROTECTED ZONE FAILURES:**

- B. Provide coordinates of the area that the protected zone was penetrated more than 0.25 inches by a vehicle component other than one which is normally in contact with the windshield.

X	Y
NONE	

- C. Provide coordinates of the area beneath the protected zone template that the inner surface of the windshield was penetrated by a vehicle component.

X	Y
NONE	

**REMARKS:**

I certify that I have read and performed each instruction.

Signature: Jim Norak

Date: 4/28/10

**DATA SHEET 43**  
**FUEL SYSTEM INTEGRITY (FMVSS 301)**

Test Vehicle: 2010 Ford Taurus  
Test Program: FMVSS 208 Compliance  
Test Technician: Jordan Haynes

NHTSA No.: CA0217  
Test Date: 4/28/10

TYPE OF IMPACT:	25 mph Unbelted Flat Frontal
-----------------	------------------------------

**Stoddard Solvent Spillage Measurements**


- A. From impact until vehicle motion ceases: 0.0 grams  
(Maximum Allowable = 28 grams)
- B. For the 5 minute period after motion ceases: 0.0 grams  
(Maximum Allowable = 142 grams)
- C. For the following 25 minutes: 0.0 grams  
(Maximum Allowable = 28 grams/minute)
- D. Spillage: NONE

REMARKS: NO SPILLAGE

## FMVSS 301 STATIC ROLLOVER DATA


Test Vehicle: 2010 Ford Taurus  
 Test Program: FMVSS 208 Compliance

NHTSA No.: CA0217  
 Test Date: 4/28/10

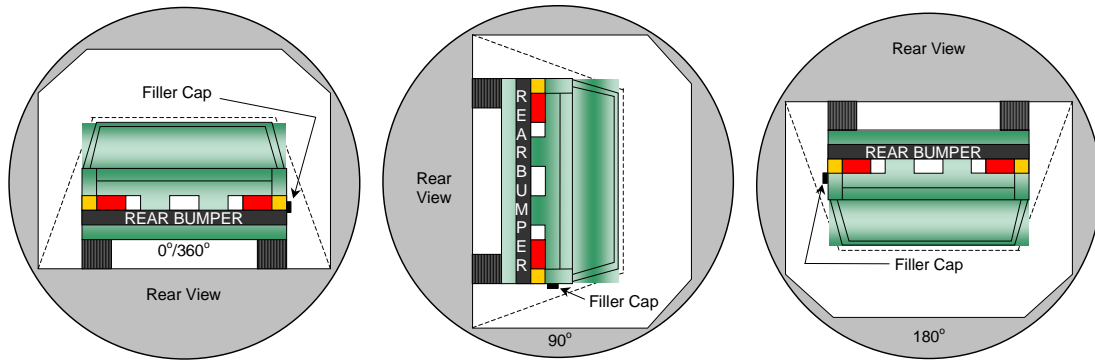

0° to 90°

90° to 180°

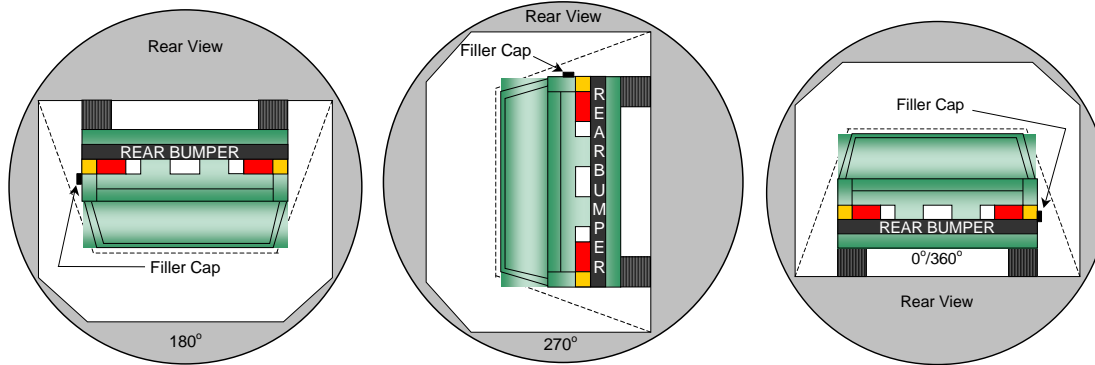

180° to 270°

270° to 360°

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.
2. The position hold time at each position is 300 seconds (minimum).
3. Details of Stoddard Solvent spillage locations: **None**





Test Phase	Rotation Time (sec.)	Hold Time (sec.)	Spillage (grams)
0° to 90°	118	300	0.0
90° to 180°	115	300	0.0
180° to 270°	114	300	0.0
270° to 360°	121	300	0.0




**APPENDIX A**  
**CRASH TEST DATA**  
**TABLE OF DATA PLOTS**





		<u>Page No.</u>
Figure No. 1.	Driver Head X Acceleration vs. Time	A-1
Figure No. 2.	Driver Head Y Acceleration vs. Time	A-1
Figure No. 3.	Driver Head Z Acceleration vs. Time	A-1
Figure No. 4.	Driver Head Resultant Acceleration vs. Time	A-1
Figure No. 5.	Driver Head X Velocity vs. Time	A-2
Figure No. 6.	Driver Head Y Velocity vs. Time	A-2
Figure No. 7.	Driver Head Z Velocity vs. Time	A-2
Figure No. 8.	Driver Neck Force X vs. Time	A-3
Figure No. 9.	Driver Neck Force Y vs. Time	A-3
Figure No. 10.	Driver Neck Force Z vs. Time	A-3
Figure No. 11.	Driver Neck Force Resultant vs. Time	A-3
Figure No. 12.	Driver Neck Moment X vs. Time	A-4
Figure No. 13.	Driver Neck Moment Y vs. Time	A-4
Figure No. 14.	Driver Neck Moment Z vs. Time	A-4
Figure No. 15.	Driver Neck Moment Resultant vs. Time	A-4
Figure No. 16.	Driver Chest X Acceleration vs. Time	A-5
Figure No. 17.	Driver Chest Y Acceleration vs. Time	A-5
Figure No. 18.	Driver Chest Z Acceleration vs. Time	A-5
Figure No. 19.	Driver Chest Resultant Acceleration vs. Time	A-5
Figure No. 20.	Driver Chest X Velocity vs. Time	A-6
Figure No. 21.	Driver Chest Y Velocity vs. Time	A-6
Figure No. 22.	Driver Chest Z Velocity vs. Time	A-6
Figure No. 23.	Driver Chest Displacement vs. Time	A-6
Figure No. 24.	Driver Left Femur Force vs. Time	A-7
Figure No. 25.	Driver Right Femur Force vs. Time	A-7
Figure No. 26.	Passenger Head X Acceleration vs. Time	A-8
Figure No. 27.	Passenger Head Y Acceleration vs. Time	A-8





	<u>Page No.</u>
Figure No. 28. Passenger Head Z Acceleration vs. Time	A-8
Figure No. 29. Passenger Head Resultant Acceleration vs. Time	A-8
Figure No. 30. Passenger Head X Velocity vs. Time	A-9
Figure No. 31. Passenger Head Y Velocity vs. Time	A-9
Figure No. 32. Passenger Head Z Velocity vs. Time	A-9
Figure No. 33. Passenger Neck Force X vs. Time	A-10
Figure No. 34. Passenger Neck Force Y vs. Time	A-10
Figure No. 35. Passenger Neck Force Z vs. Time	A-10
Figure No. 36. Passenger Neck Force Resultant vs. Time	A-10
Figure No. 37. Passenger Neck Moment X vs. Time	A-11
Figure No. 38. Passenger Neck Moment Y vs. Time	A-11
Figure No. 39. Passenger Neck Moment Z vs. Time	A-11
Figure No. 40. Passenger Neck Moment Resultant vs. Time	A-11
Figure No. 41. Passenger Chest X Acceleration vs. Time	A-12
Figure No. 42. Passenger Chest Y Acceleration vs. Time	A-12
Figure No. 43. Passenger Chest Z Acceleration vs. Time	A-12
Figure No. 44. Passenger Chest Resultant Acceleration vs. Time	A-12
Figure No. 45. Passenger Chest X Velocity vs. Time	A-13
Figure No. 46. Passenger Chest Y Velocity vs. Time	A-13
Figure No. 47. Passenger Chest Z Velocity vs. Time	A-13
Figure No. 48. Passenger Chest Displacement vs. Time	A-13
Figure No. 49. Passenger Left Femur Force vs. Time	A-14
Figure No. 50. Passenger Right Femur Force vs. Time	A-14
Figure No. 51. Driver Nij ( $N_{TF}$ ) vs. Time	A-15
Figure No. 52. Driver Nij ( $N_{TE}$ ) vs. Time	A-15
Figure No. 53. Driver Nij ( $N_{CF}$ ) vs. Time	A-15
Figure No. 54. Driver Nij ( $N_{CE}$ ) vs. Time	A-15
Figure No. 55. Passenger Nij ( $N_{TF}$ ) vs. Time	A-16
Figure No. 56. Passenger Nij ( $N_{TE}$ ) vs. Time	A-16
Figure No. 57. Passenger Nij ( $N_{CF}$ ) vs. Time	A-16





		<u>Page No.</u>
Figure No. 58.	Passenger Nij ( $N_{CE}$ ) vs. Time	A-16
Figure No. 59.	Driver Occipital Condyle Moment vs. Time	A-17
Figure No. 60.	Passenger Occipital Condyle Moment vs. Time	A-17
Figure No. 61.	Left Rear Seat Crossmember X Acceleration vs. Time	A-18
Figure No. 62.	Left Rear Seat Crossmember X Velocity vs. Time	A-18
Figure No. 63.	Right Rear Seat Crossmember X Acceleration vs. Time	A-18
Figure No. 64.	Right Rear Seat Crossmember X Velocity vs. Time	A-18
Figure No. 65.	Top of Engine X Acceleration vs. Time	A-19
Figure No. 66.	Top of Engine X Velocity vs. Time	A-19
Figure No. 67.	Bottom of Engine X Acceleration vs. Time	A-19
Figure No. 68.	Bottom of Engine X Velocity vs. Time	A-19
Figure No. 69.	Left Brake Caliper X Acceleration vs. Time	A-20
Figure No. 70.	Left Brake Caliper X Velocity vs. Time	A-20
Figure No. 71.	Right Brake Caliper X Acceleration vs. Time	A-20
Figure No. 72.	Right Brake Caliper X Velocity vs. Time	A-20
Figure No. 73.	Instrument Panel X Acceleration vs. Time	A-21
Figure No. 74.	Instrument Panel X Velocity vs. Time	A-21
Figure No. 75.	Trunk Z Acceleration vs. Time	A-21
Figure No. 76.	Trunk Z Velocity vs. Time	A-21

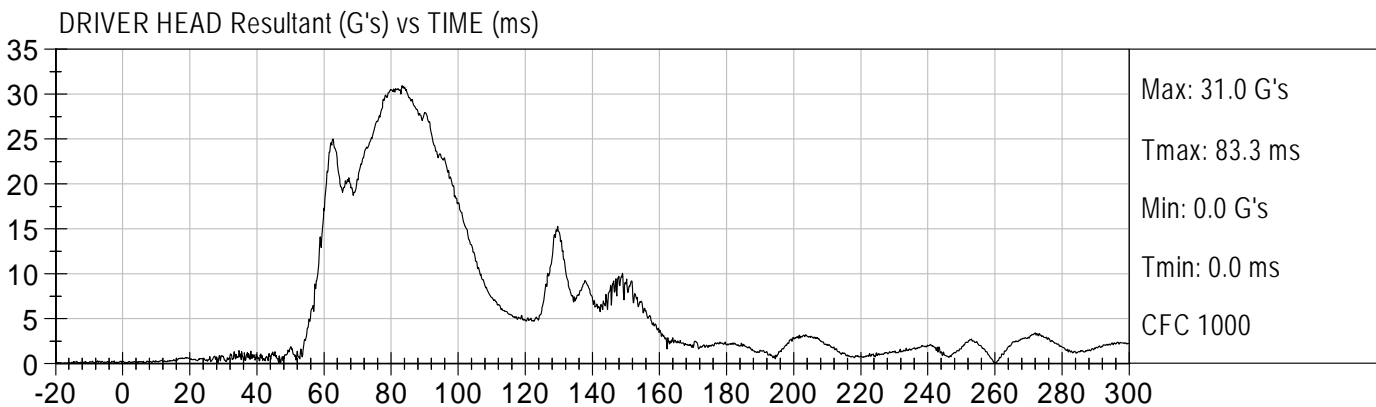
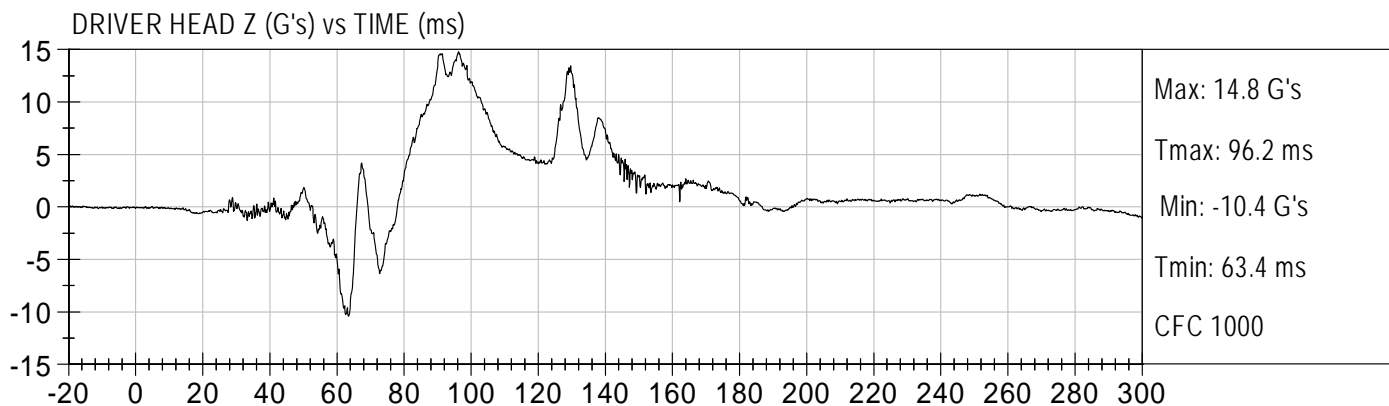
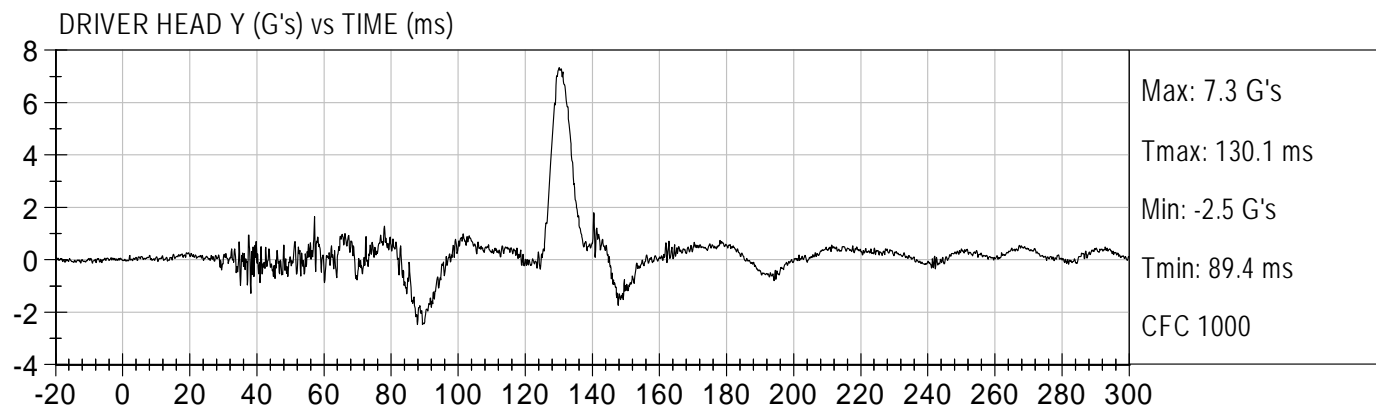
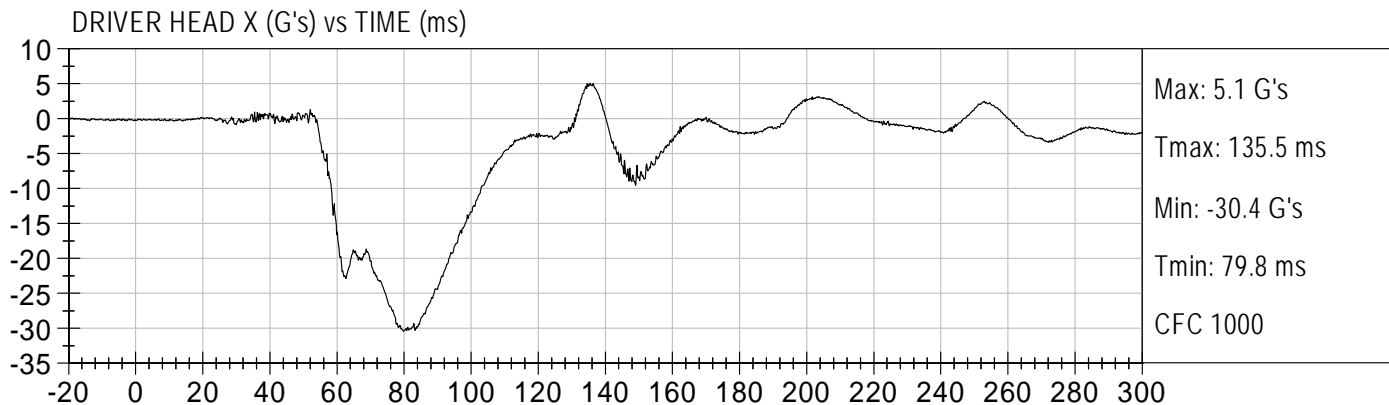


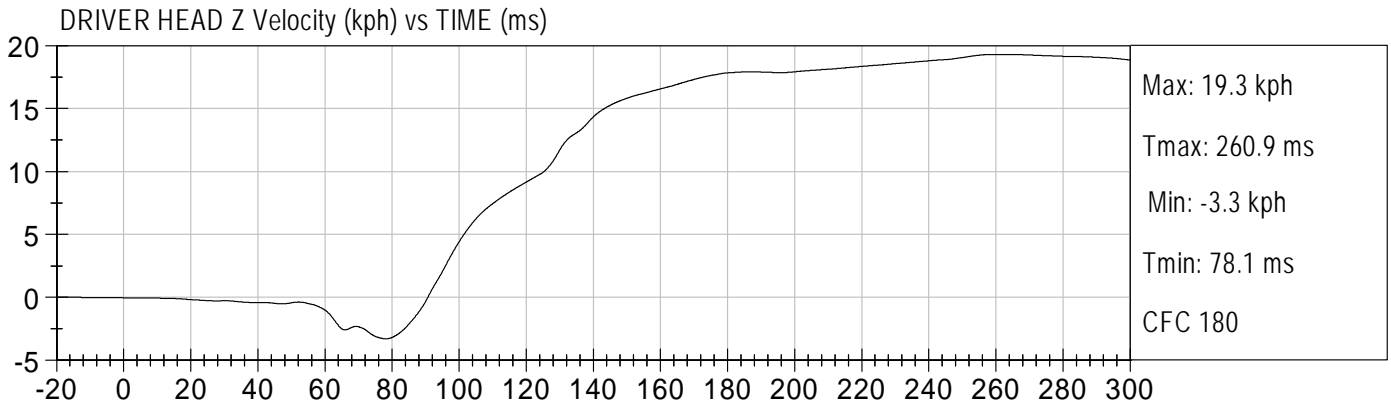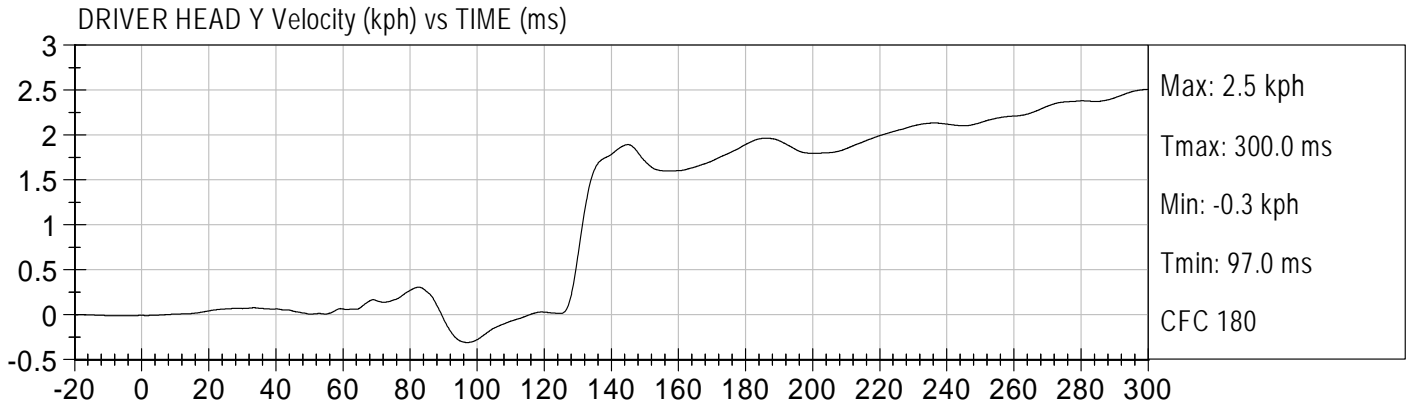
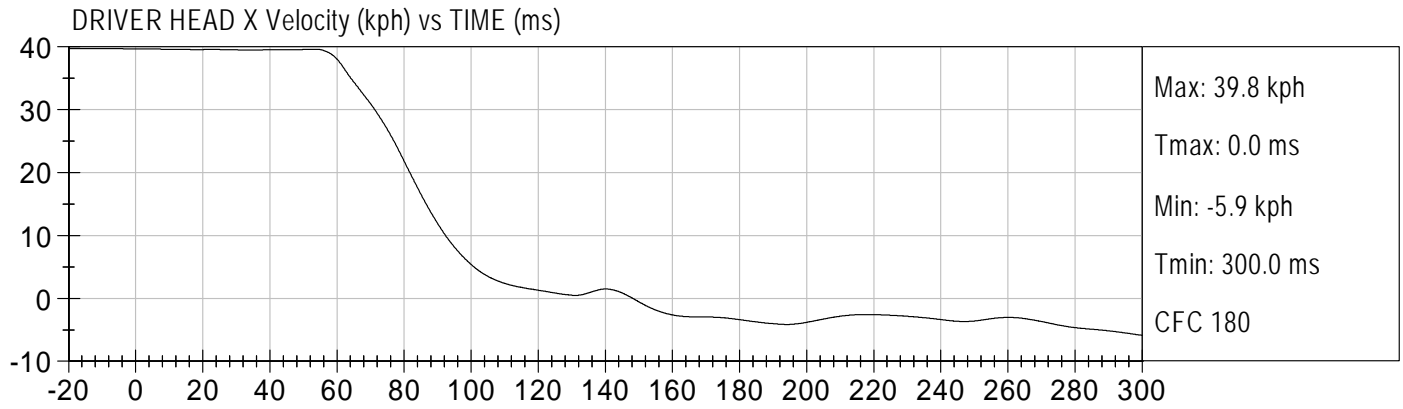


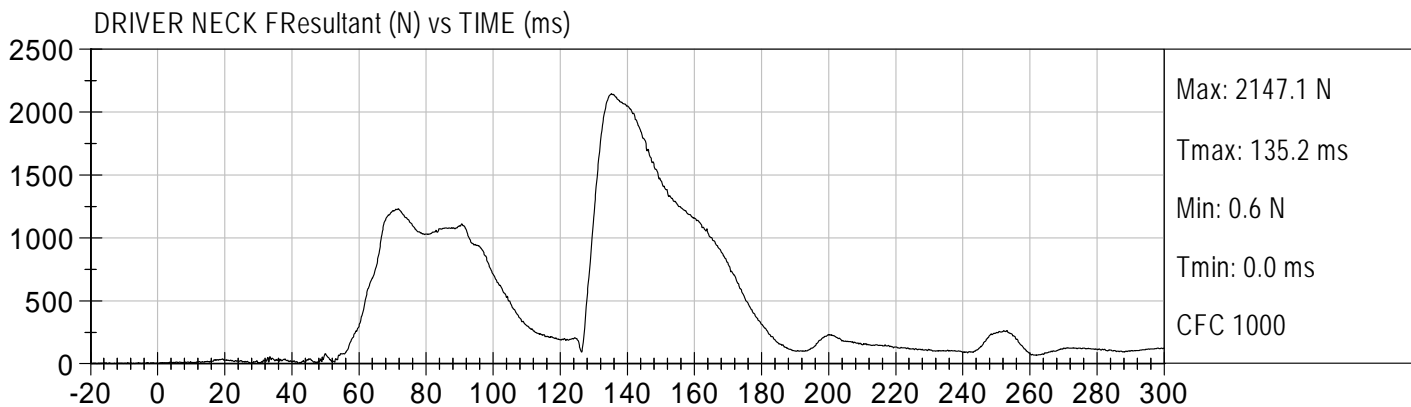
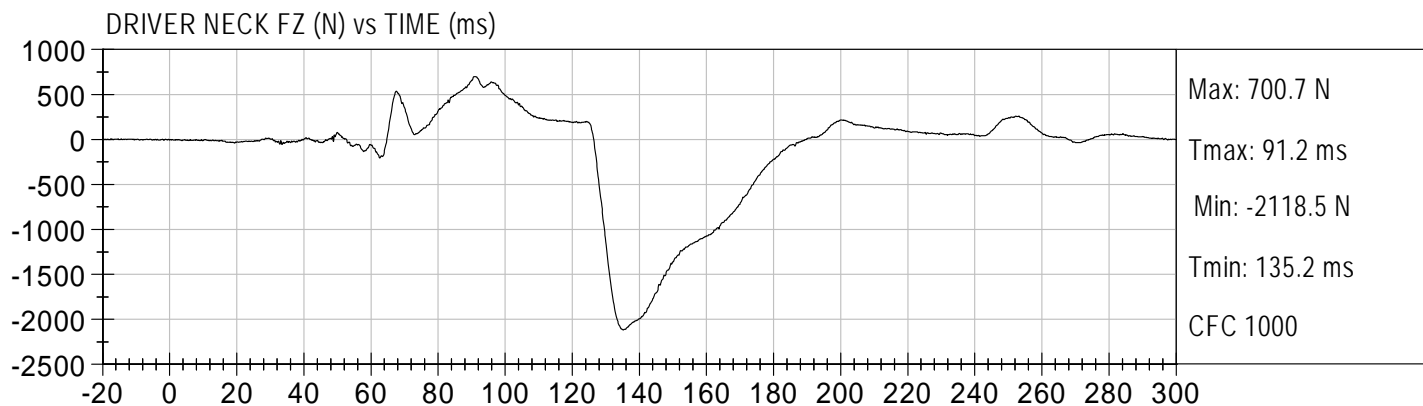
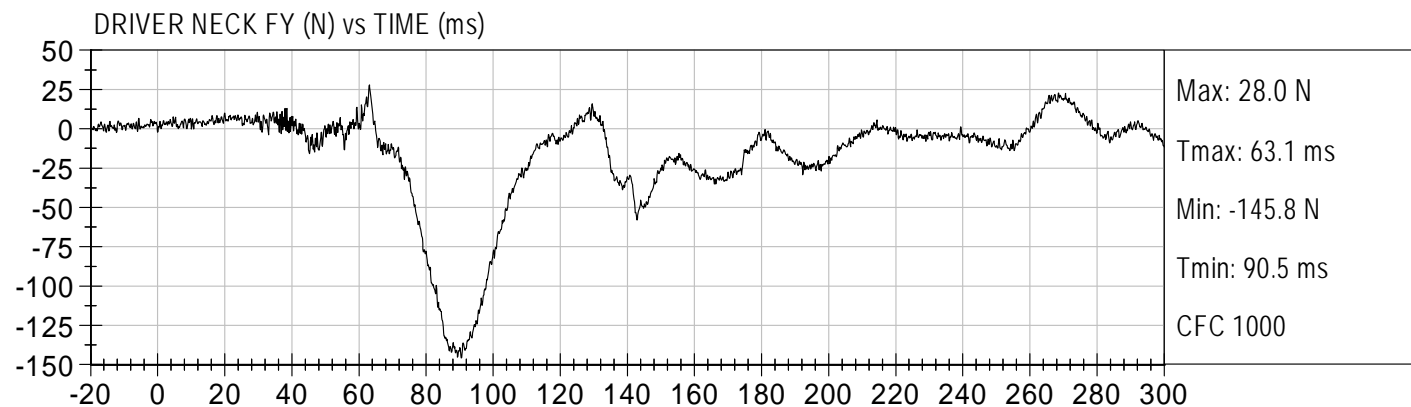
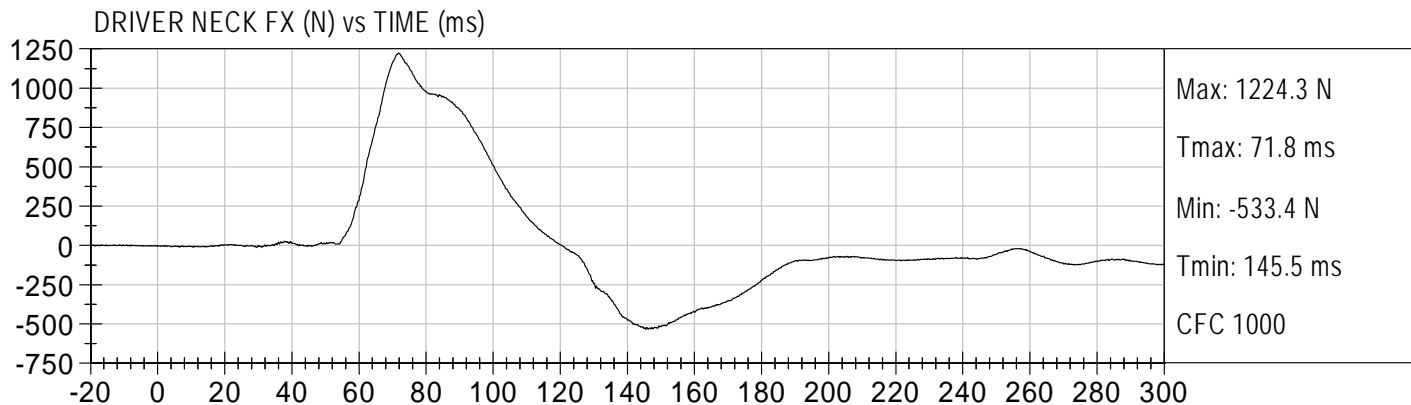


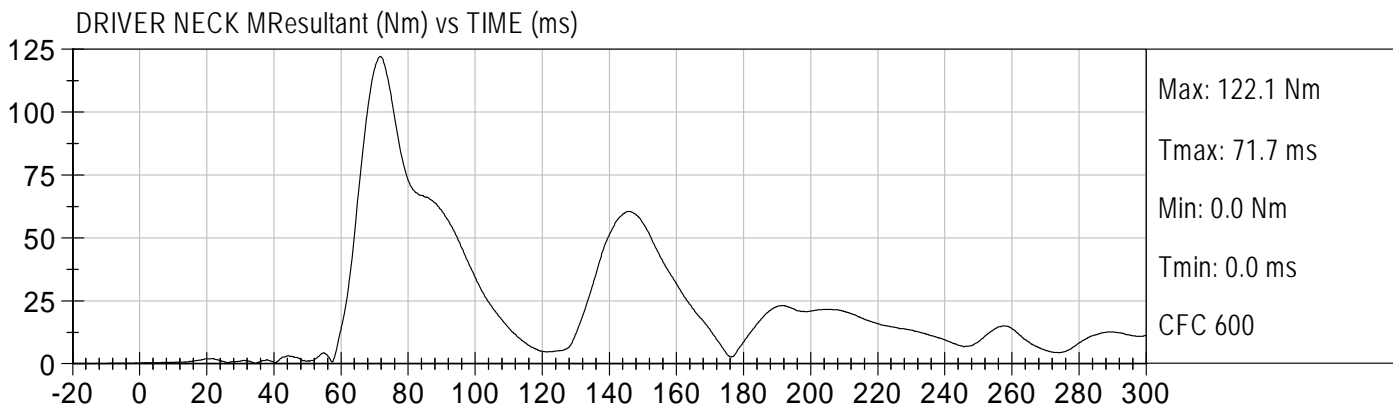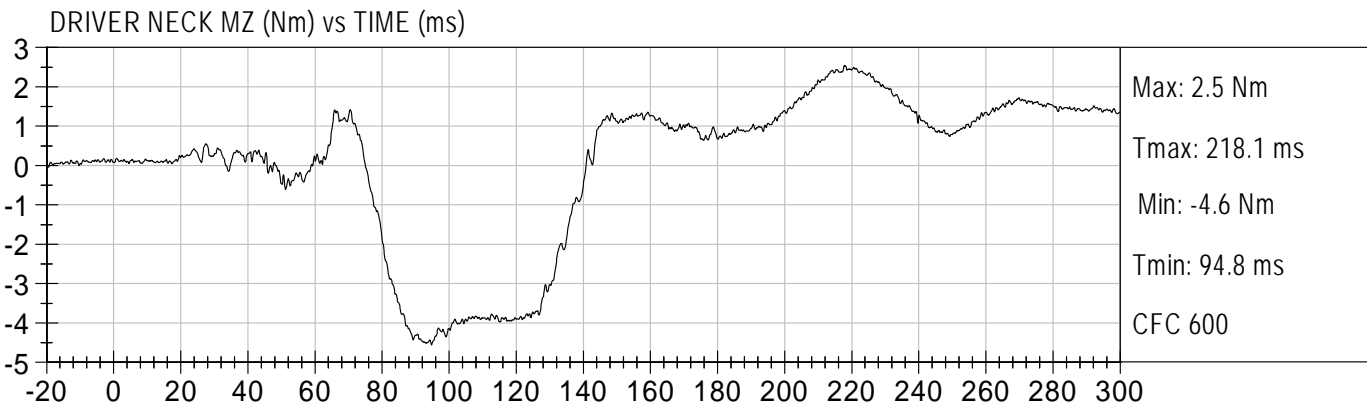
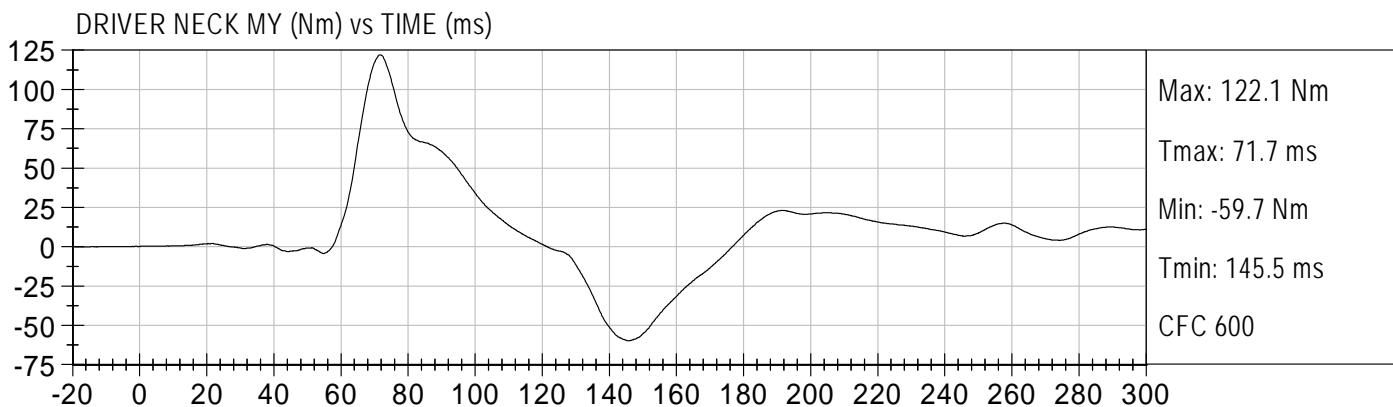
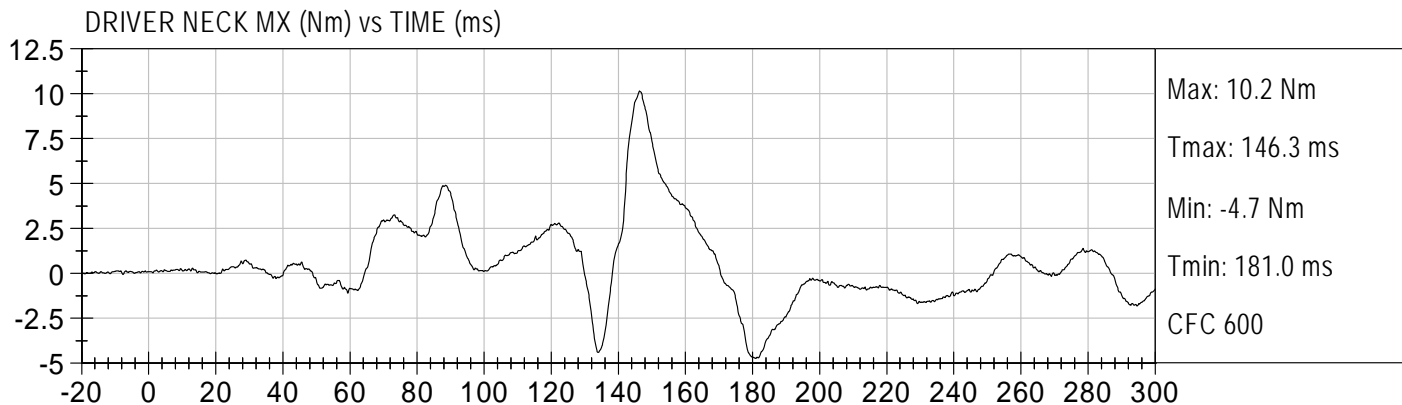


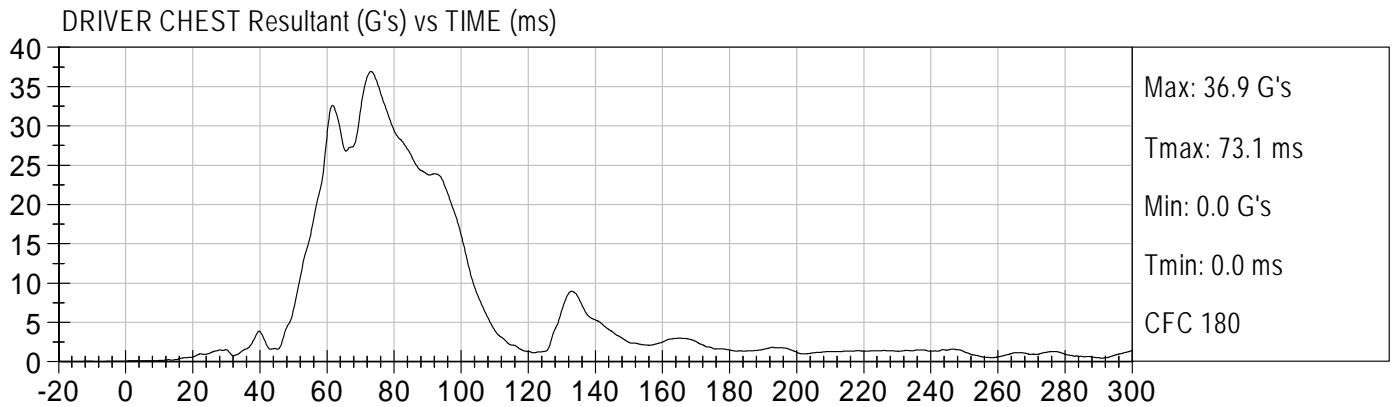
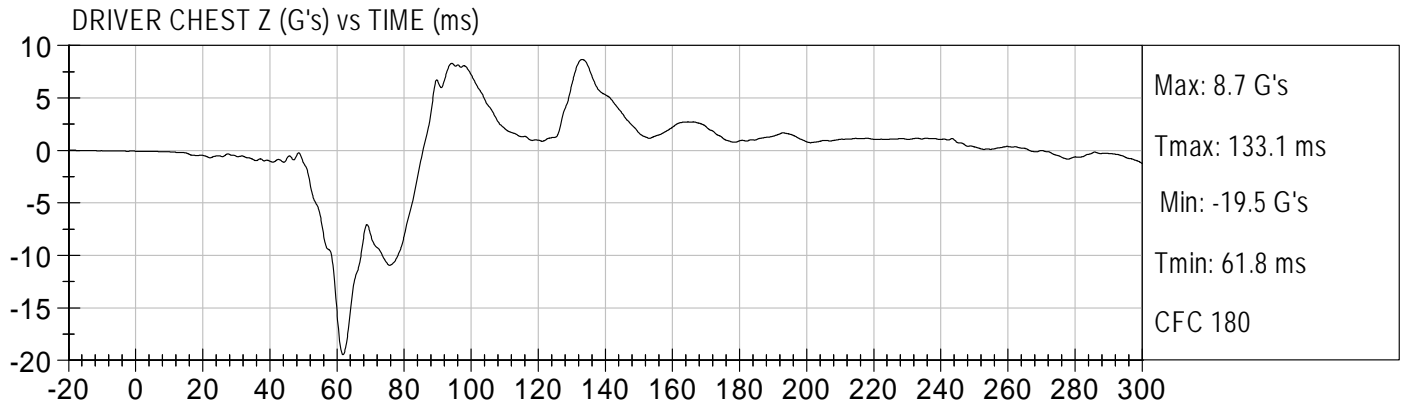
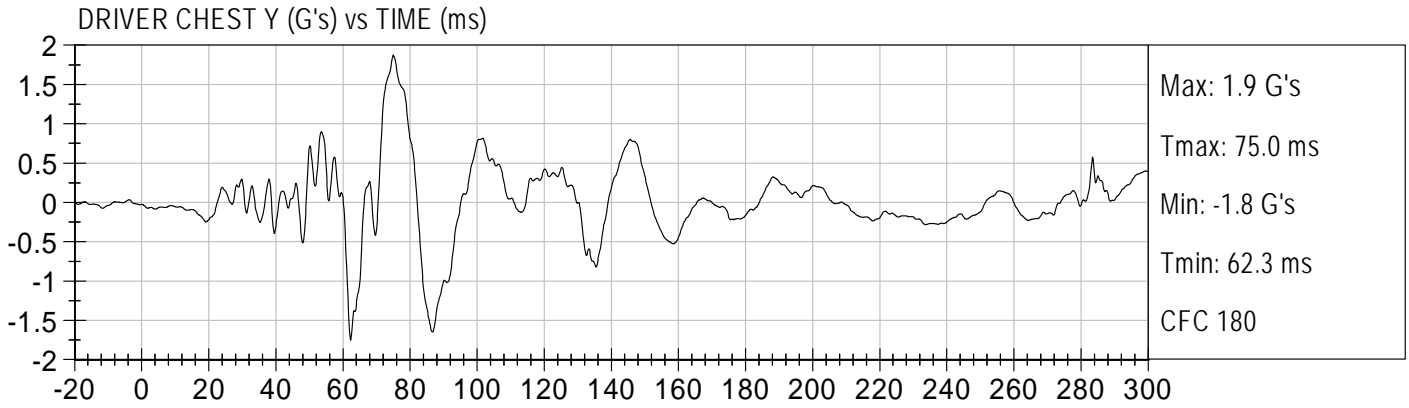
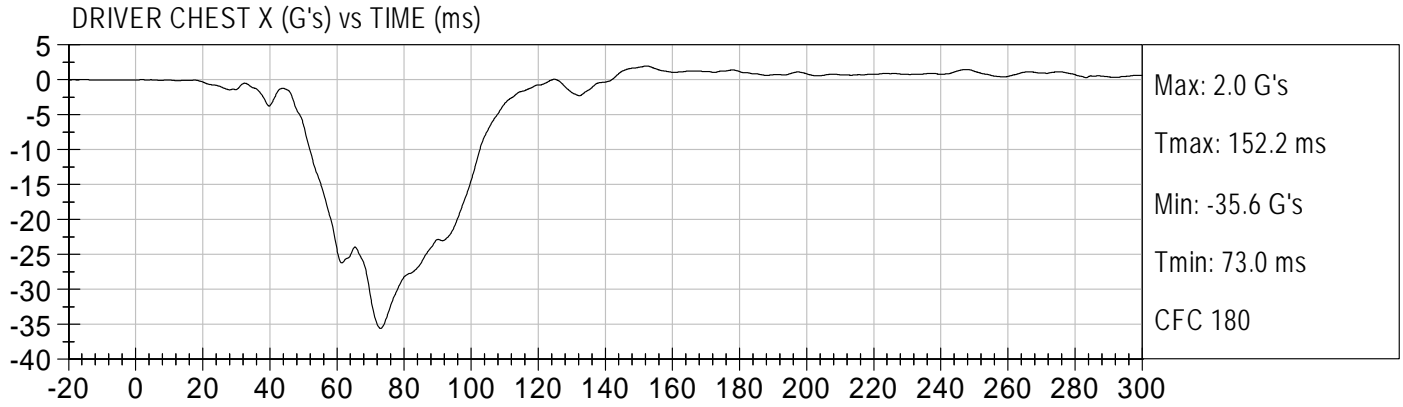


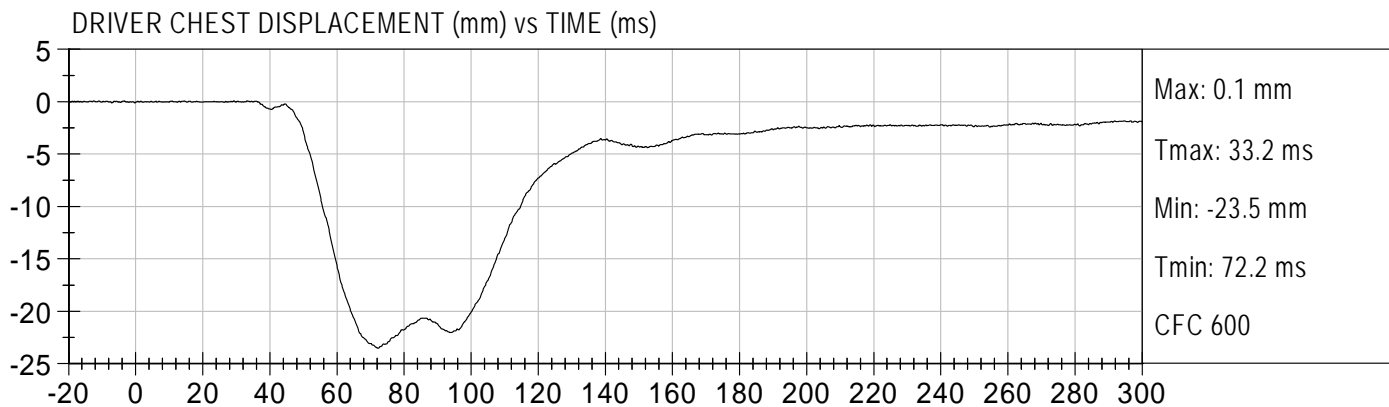
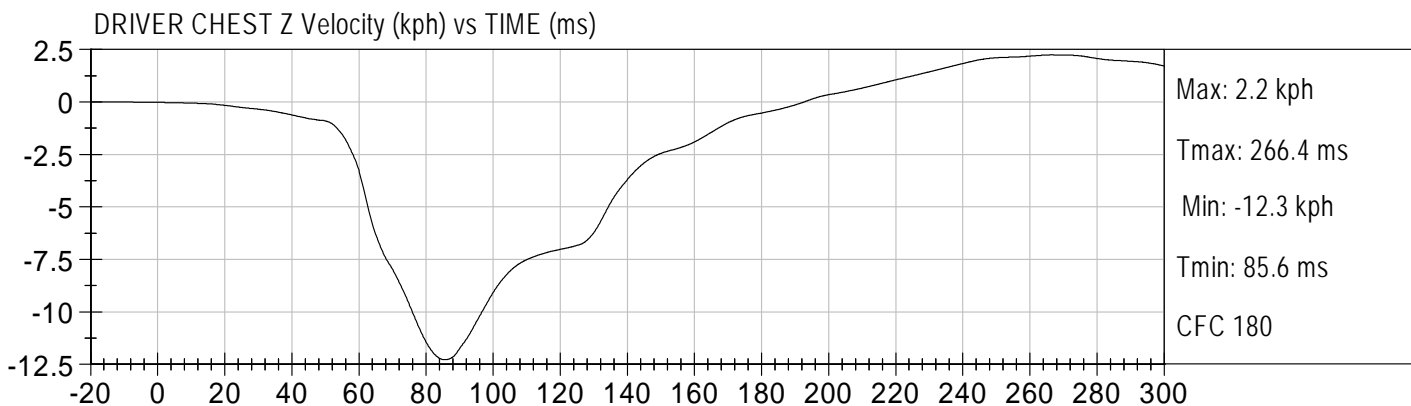
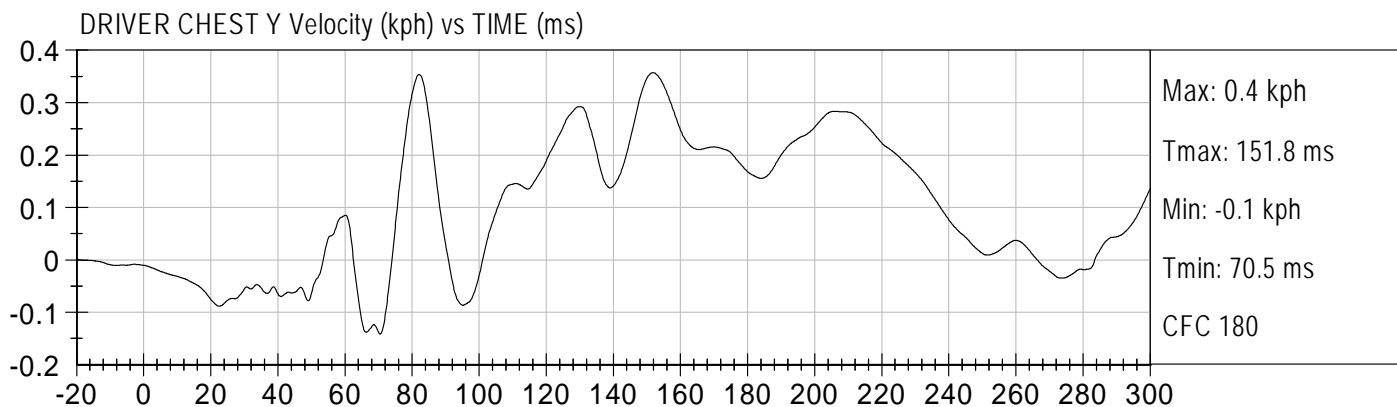
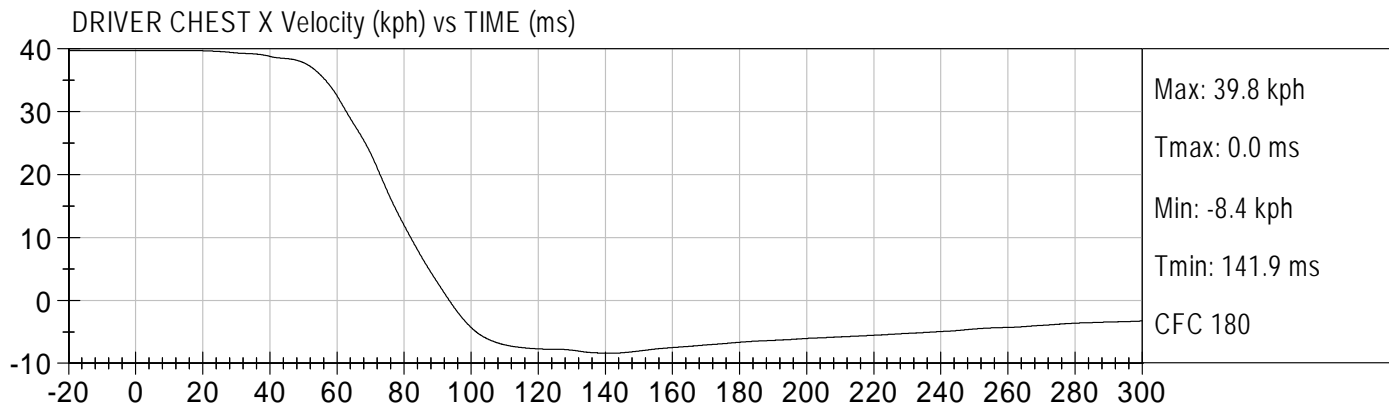




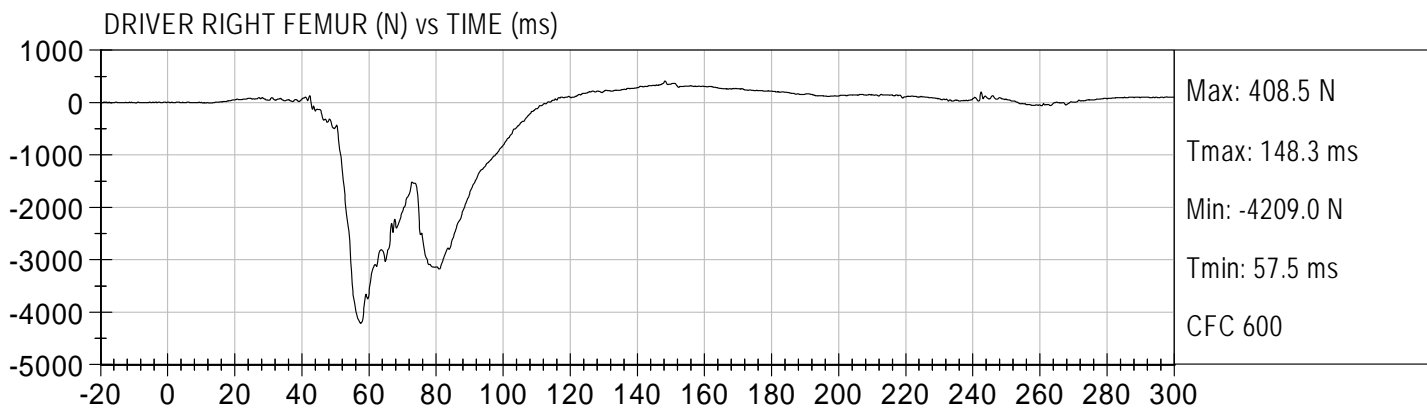
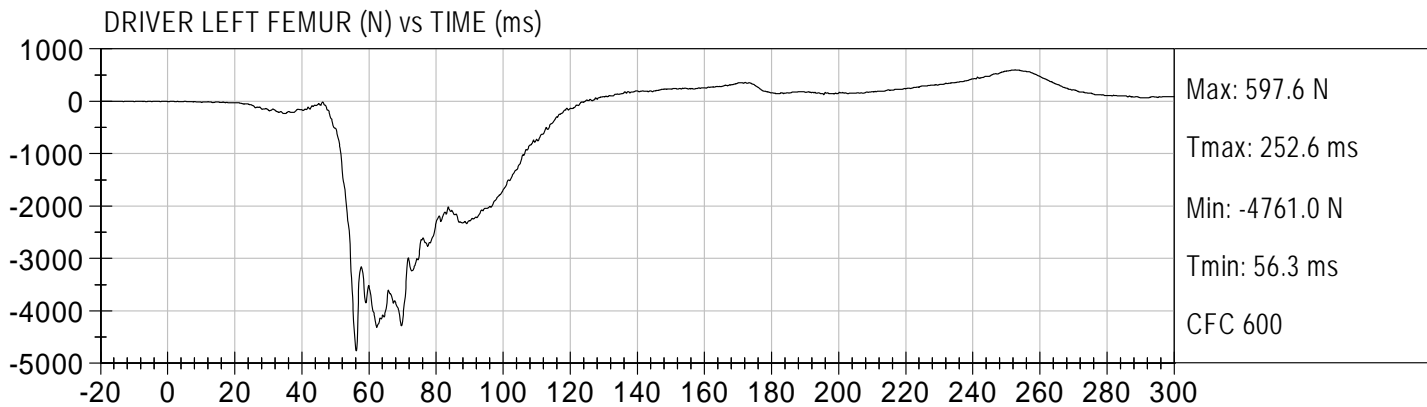


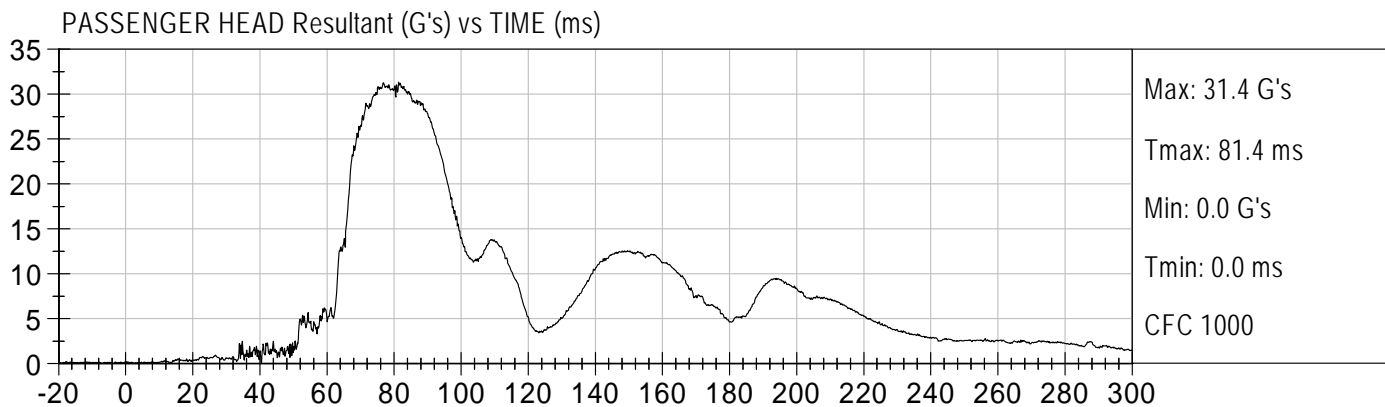
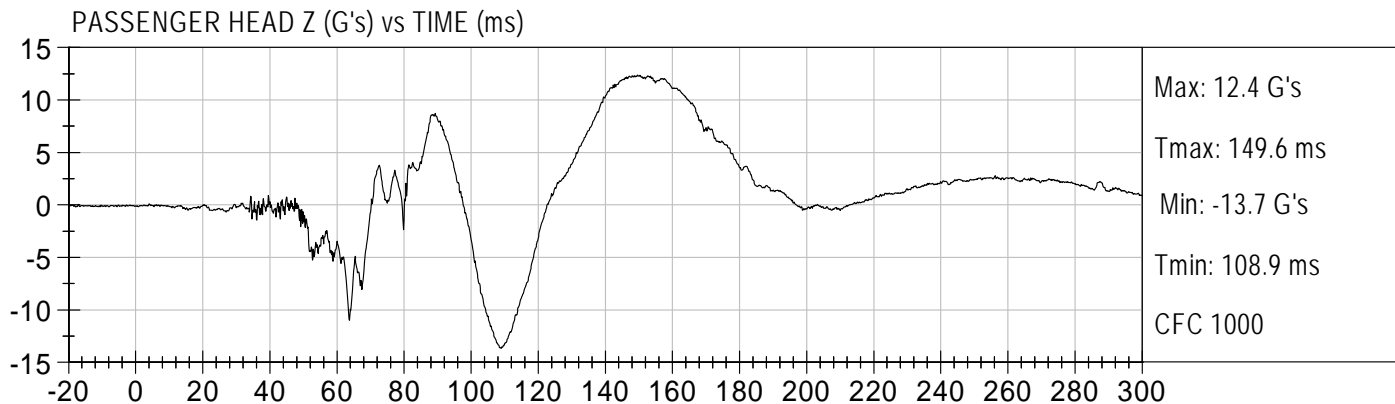
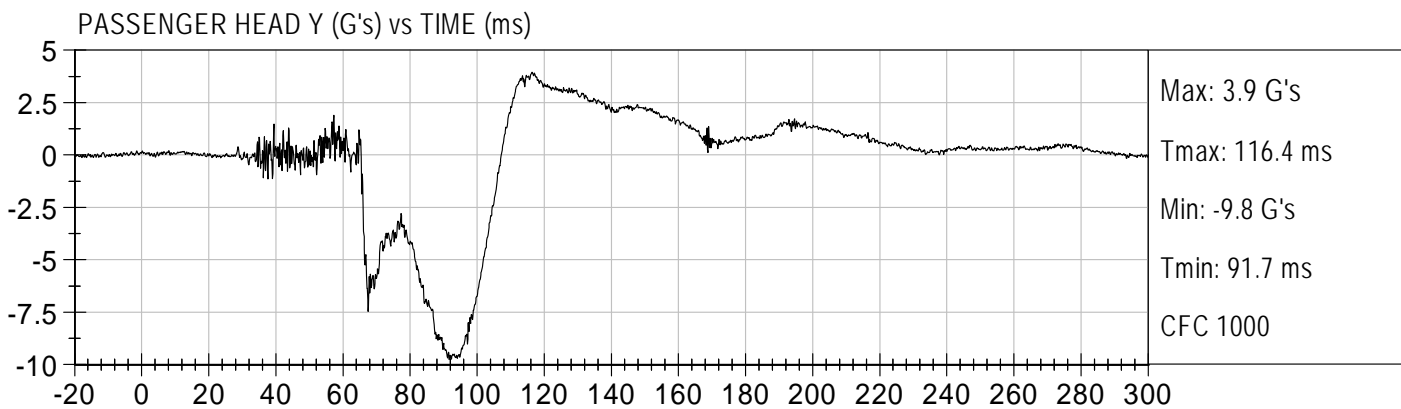
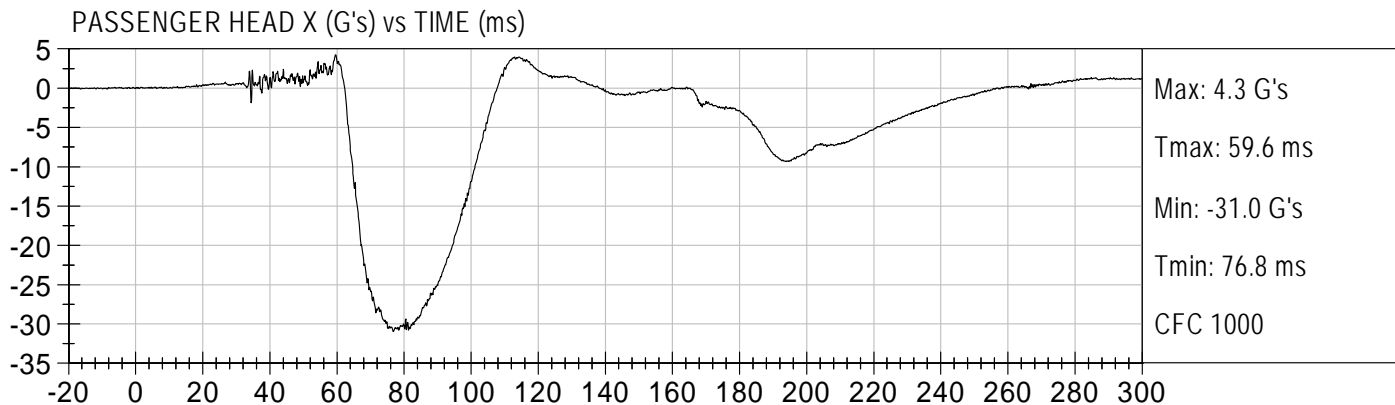


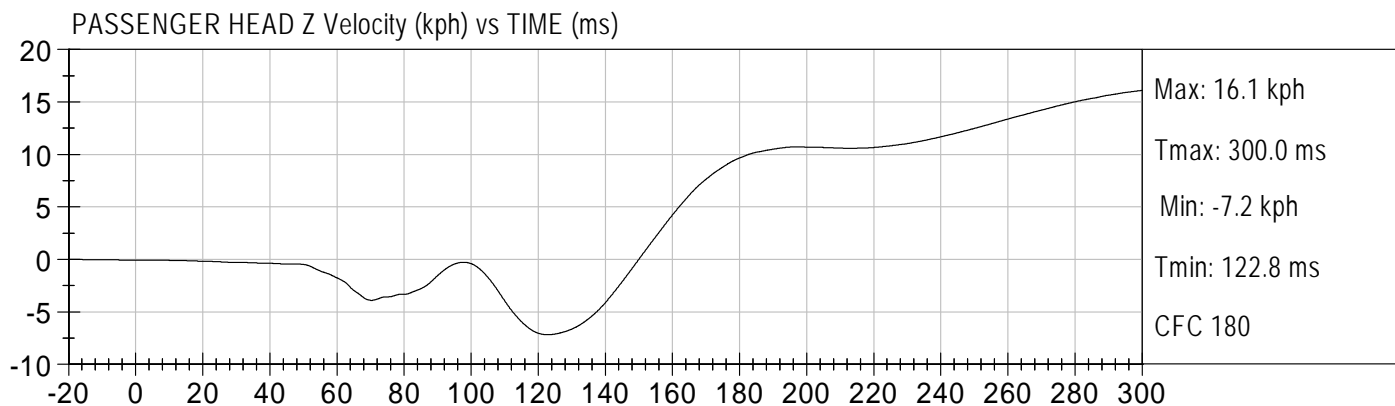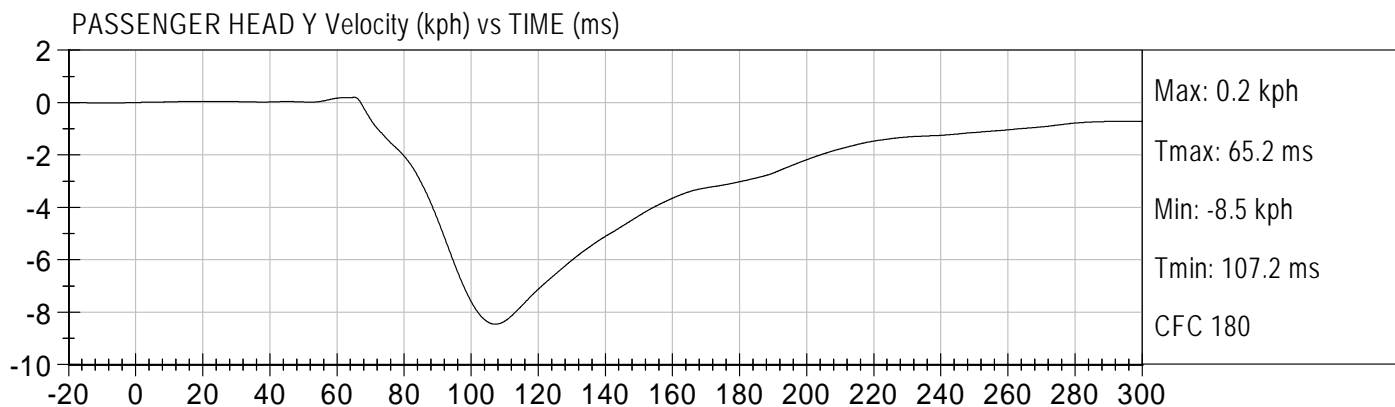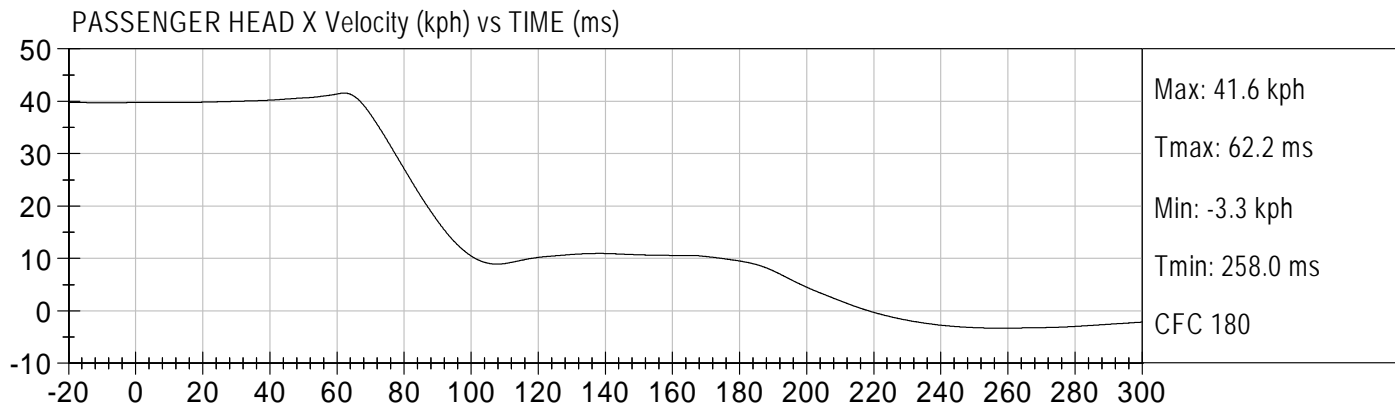

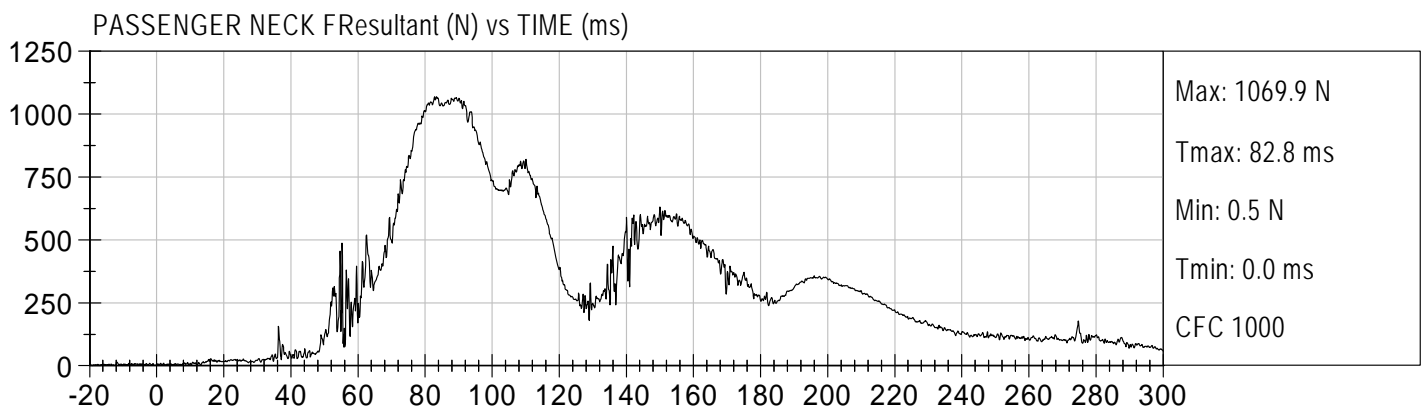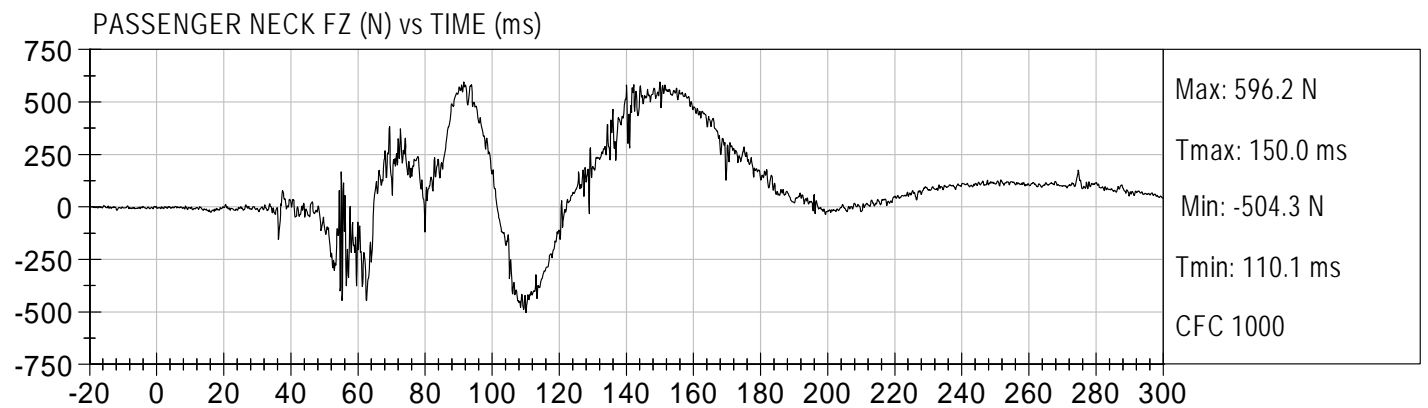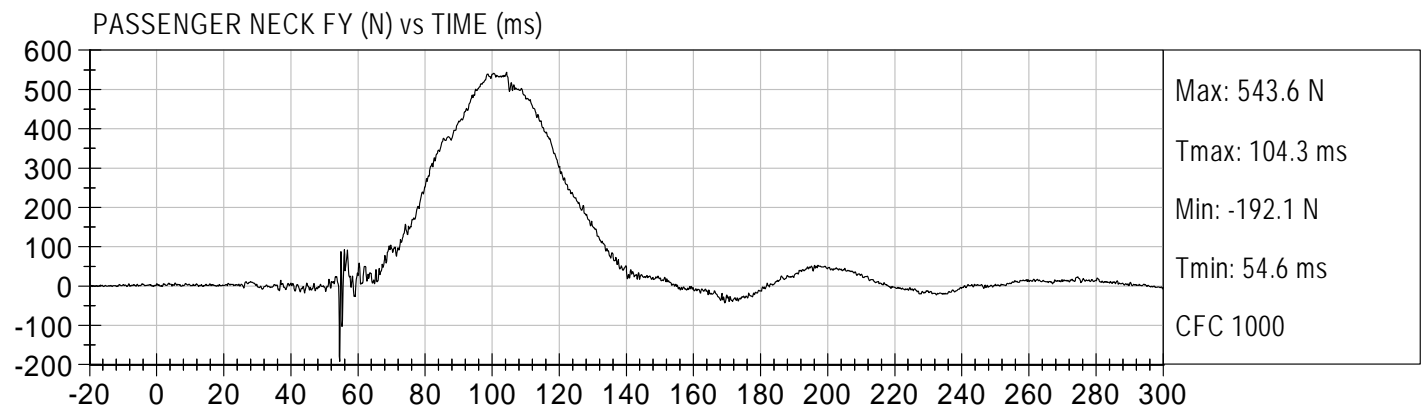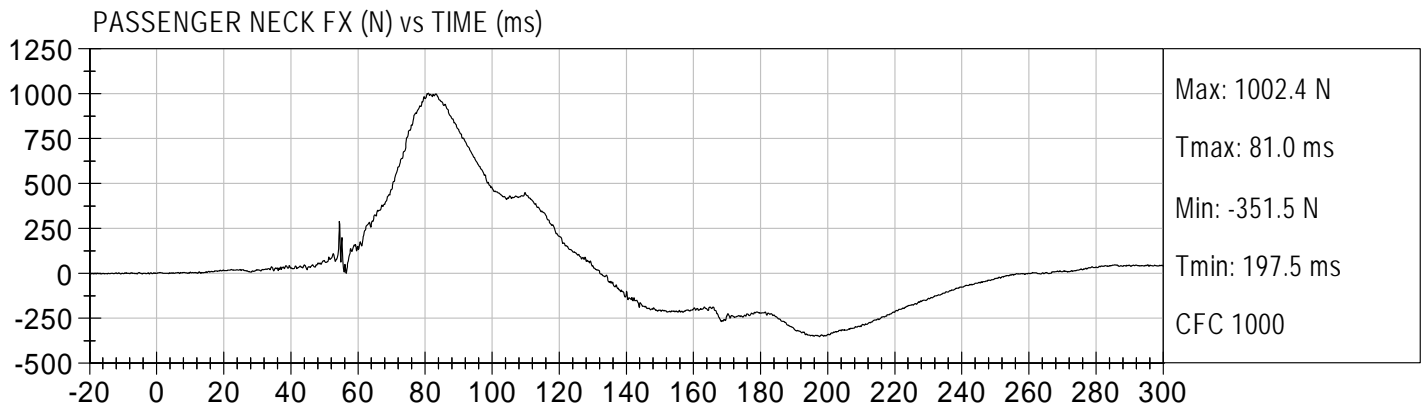

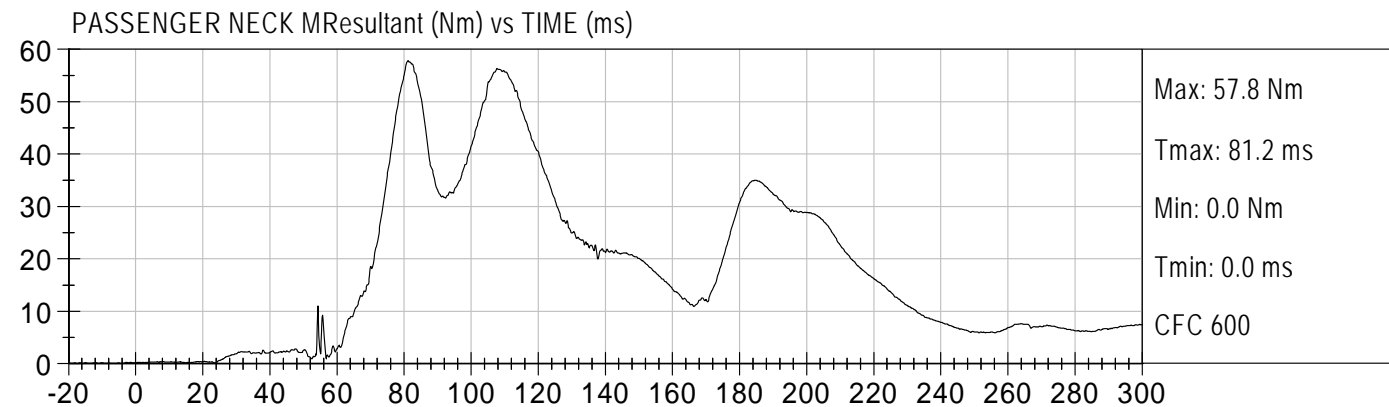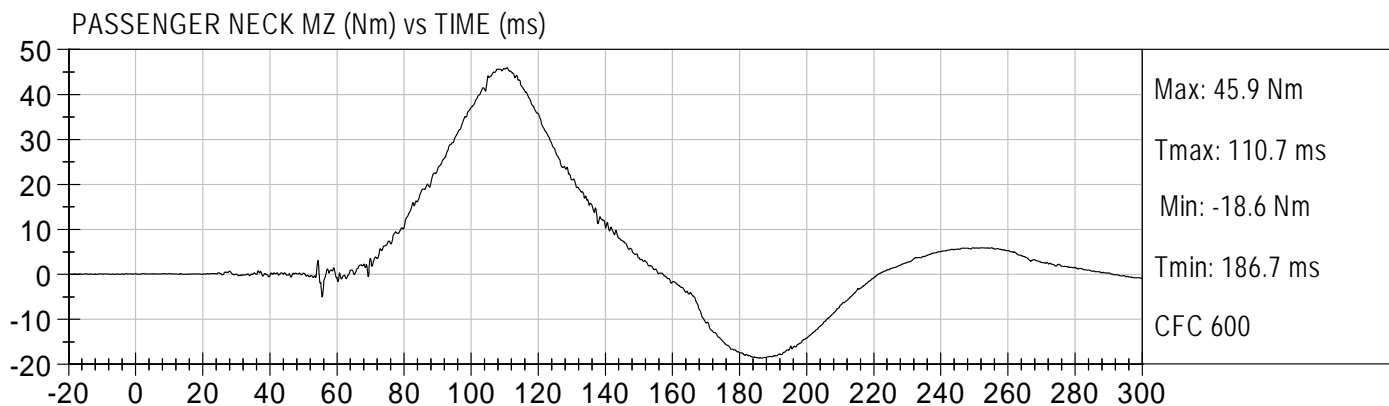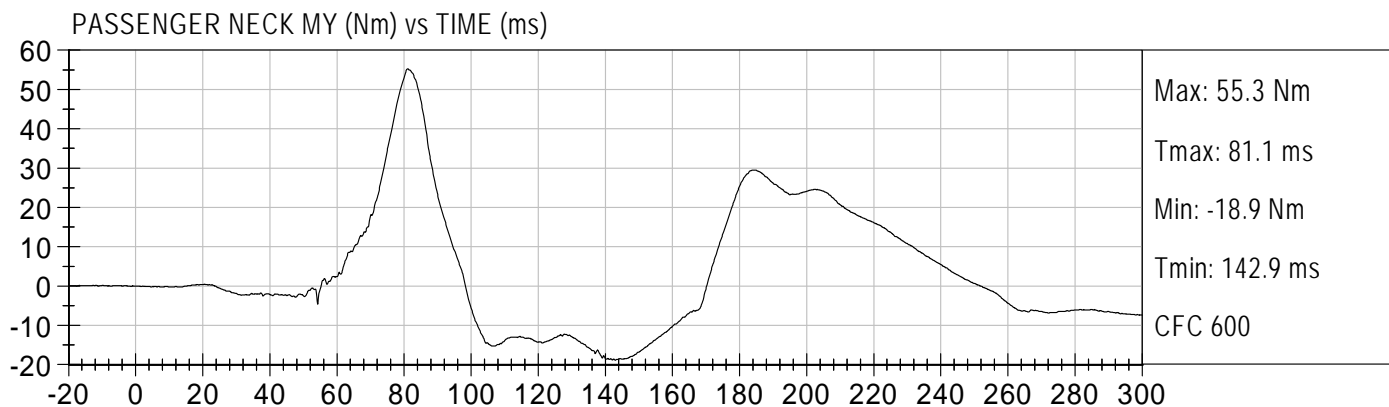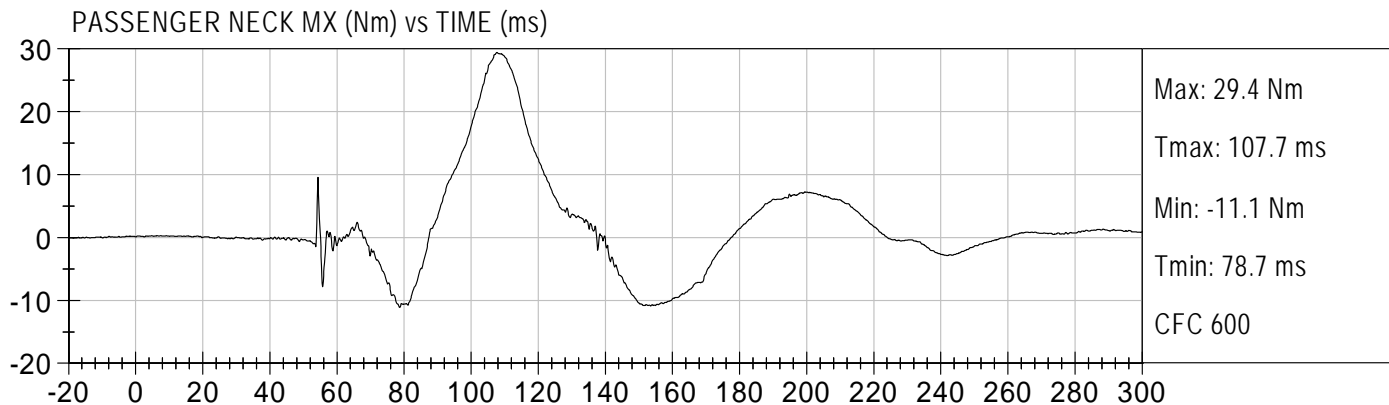

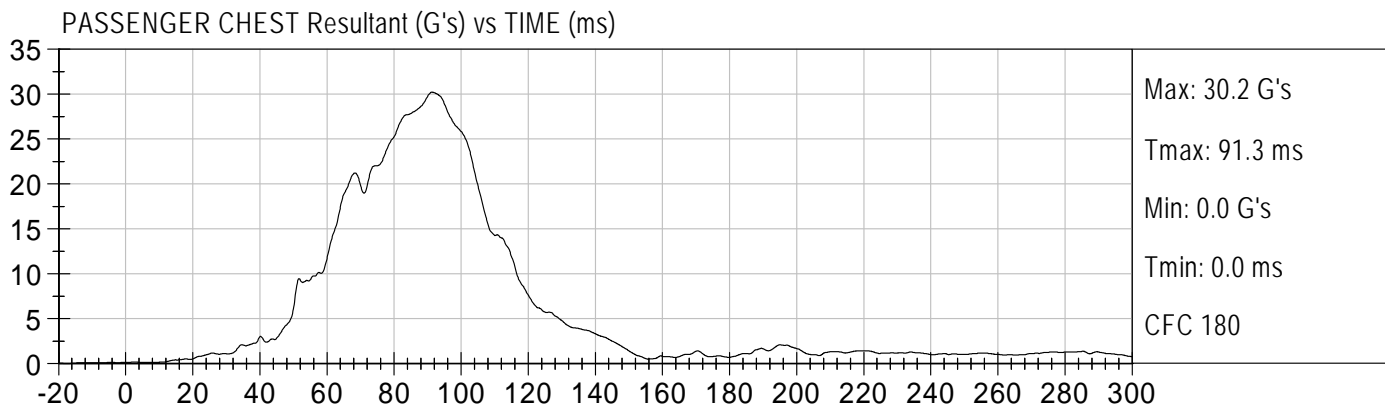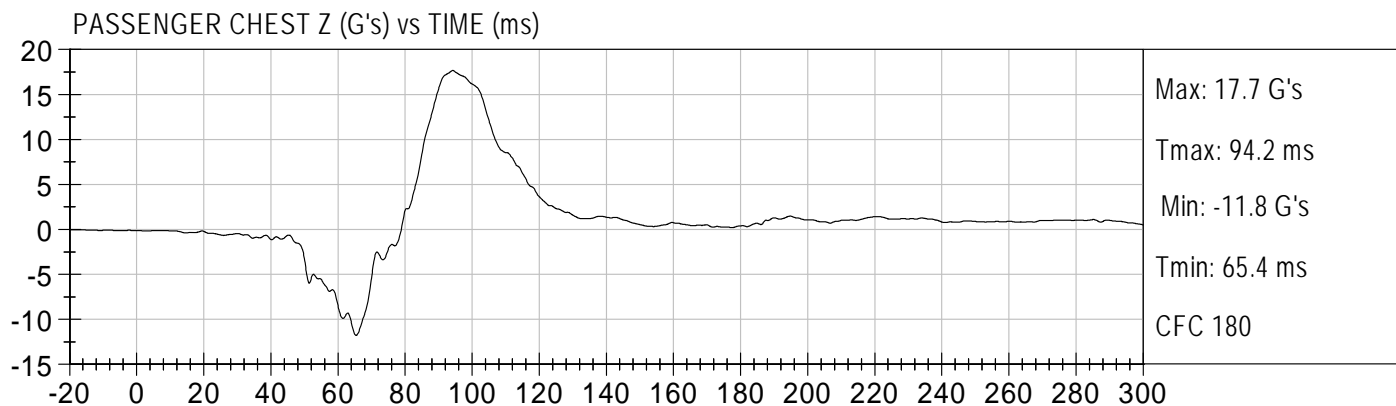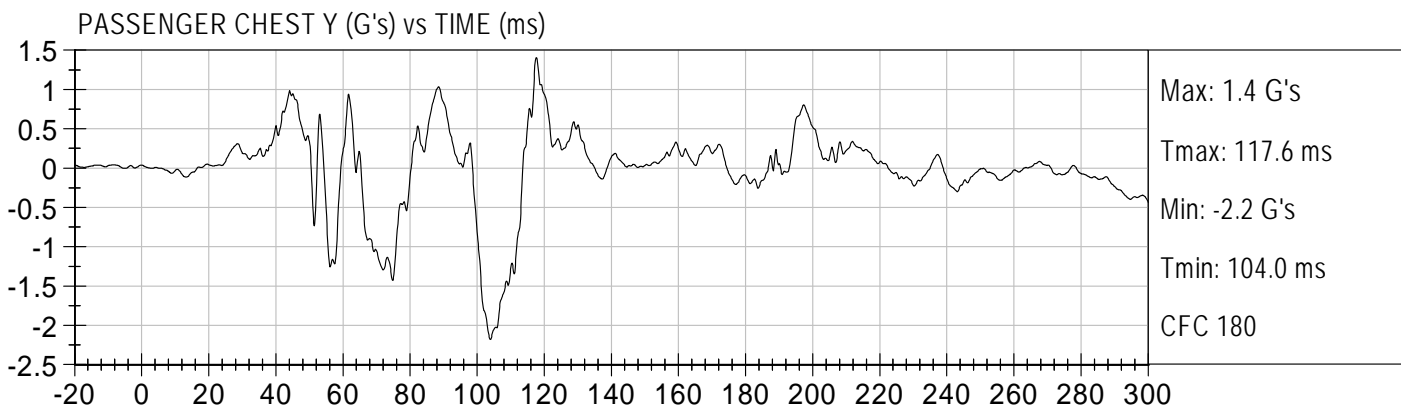
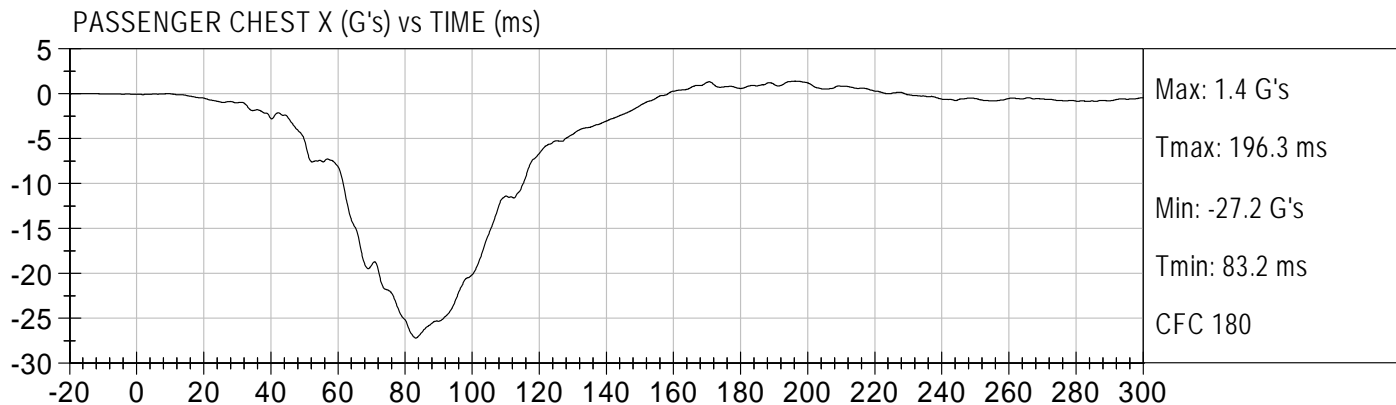


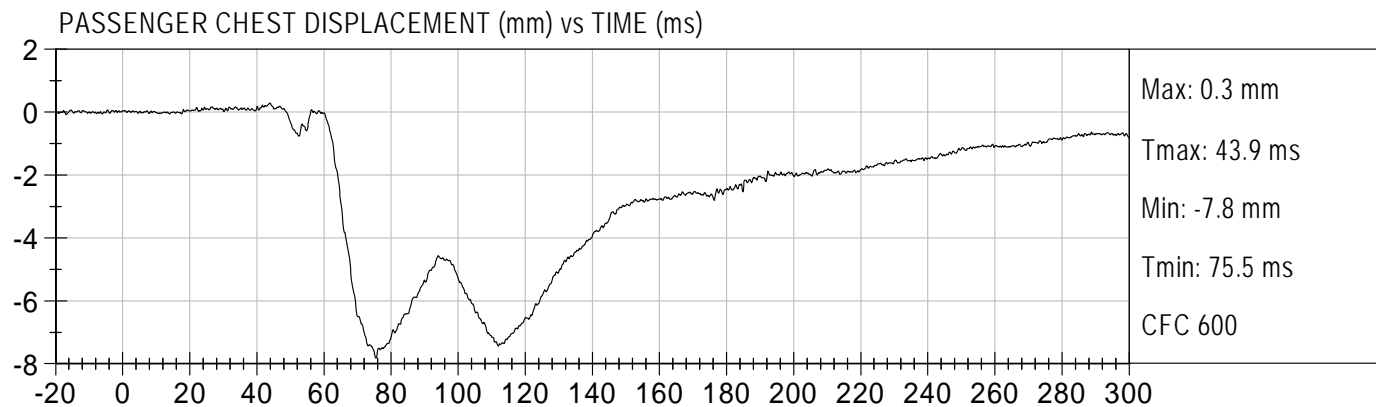
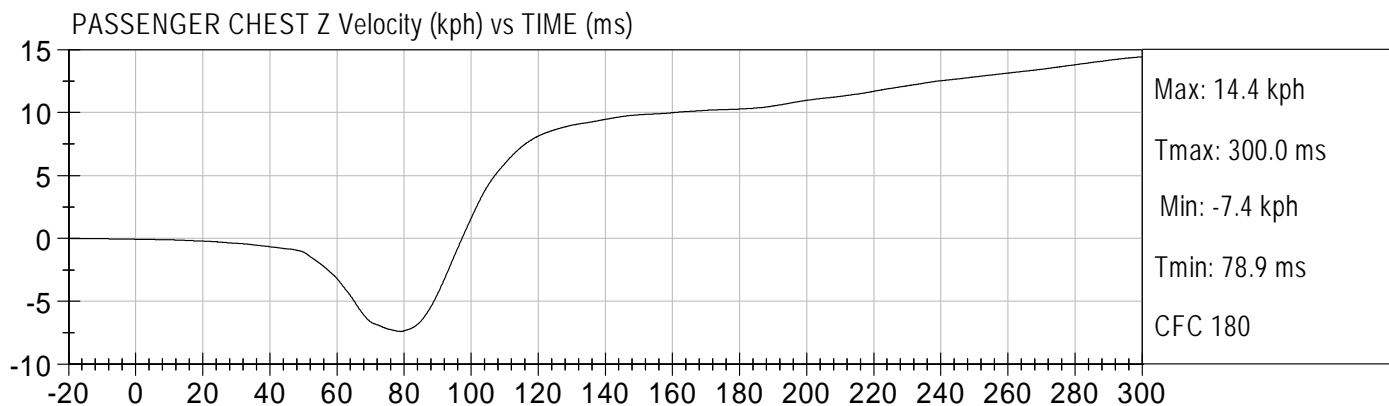
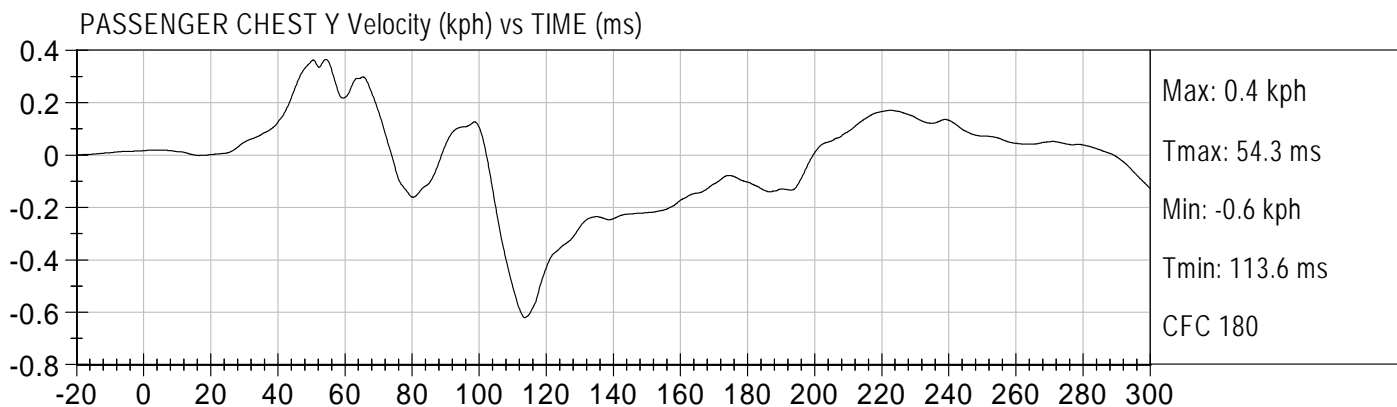
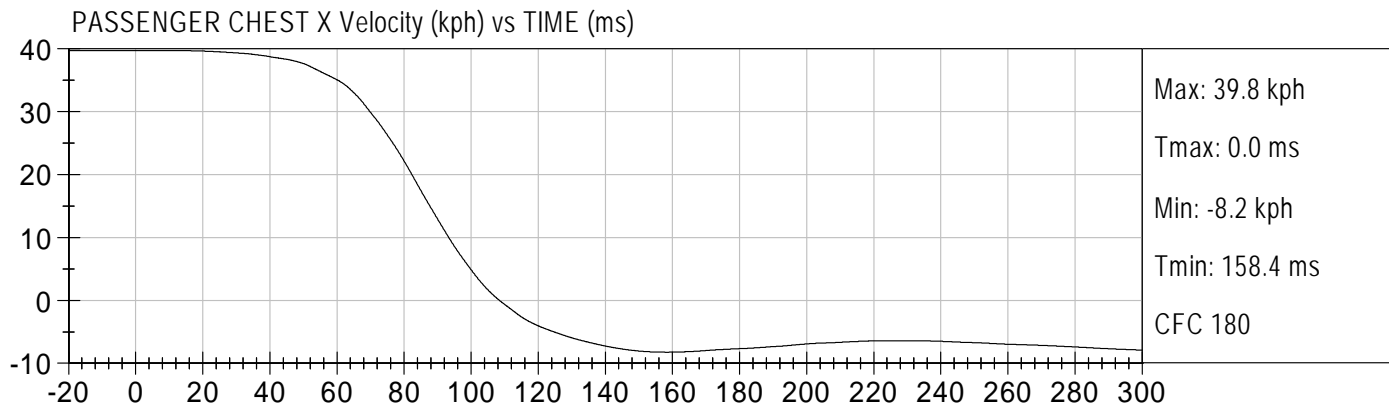










25 MPH FRONTAL UNBELTED 50THS  
2010 FORD TAURUS (CA0217)





Test Date: 04/28/2010  
Speed: 24.7 mph (39.8 km/h)



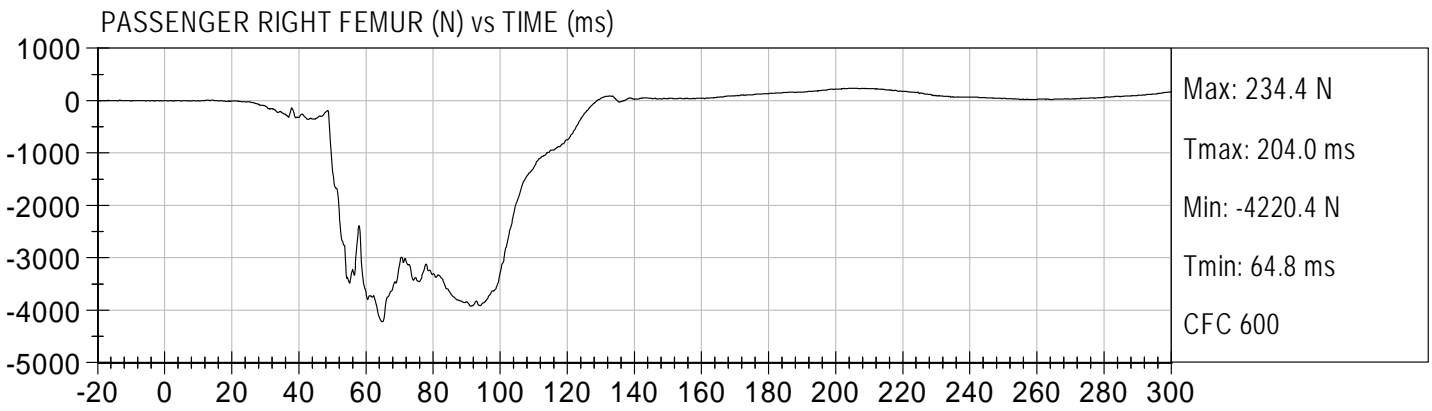
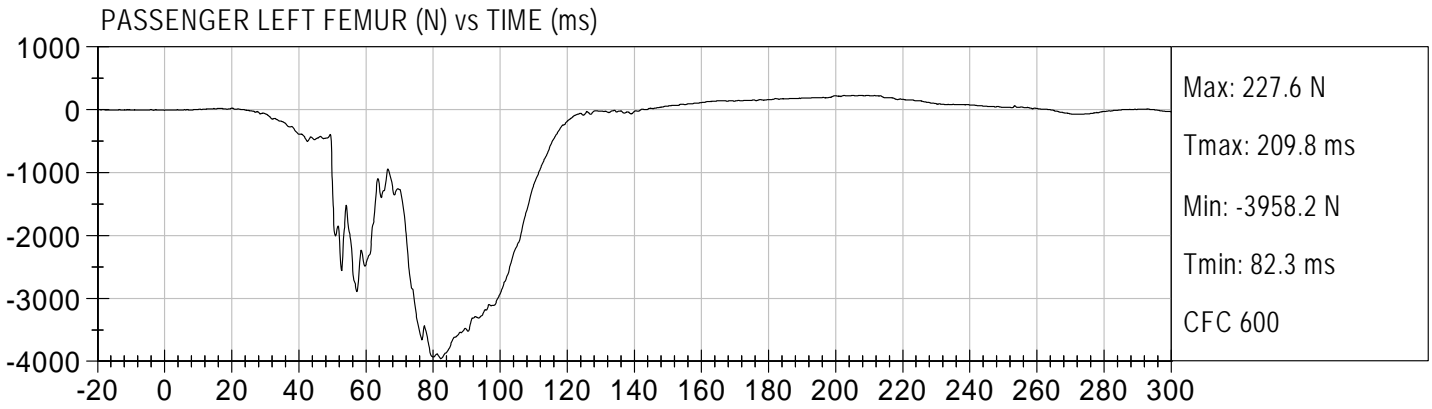


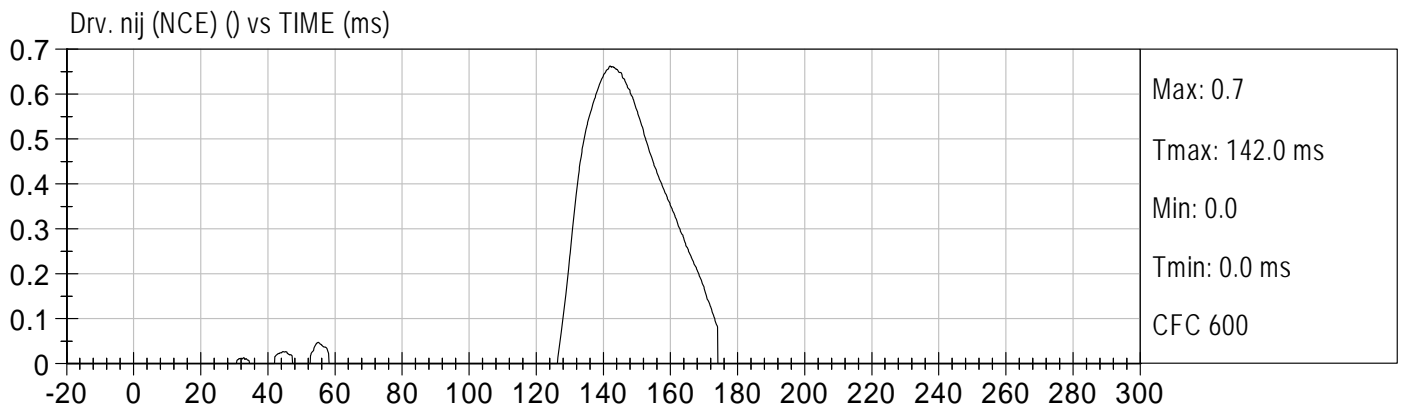
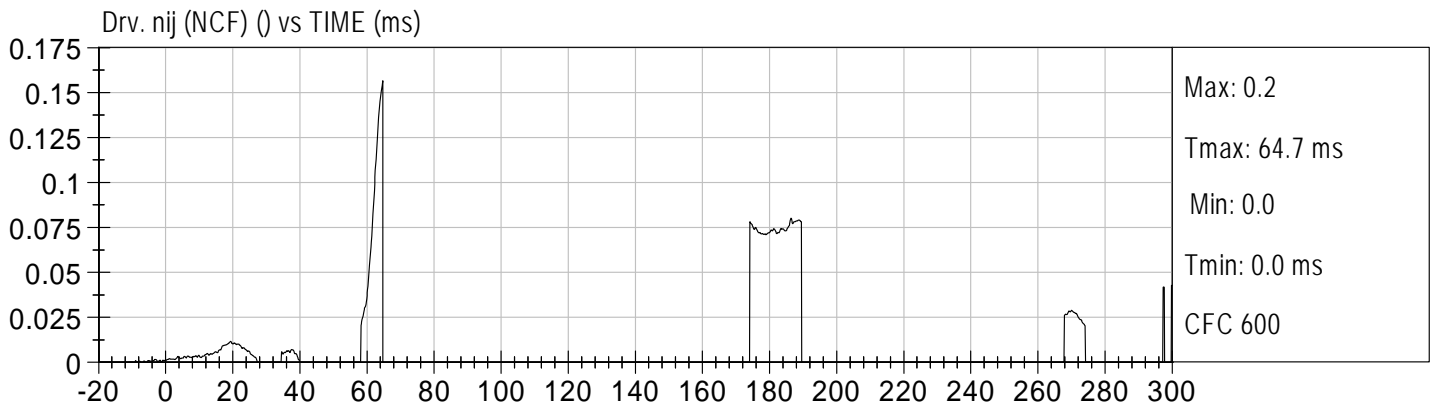
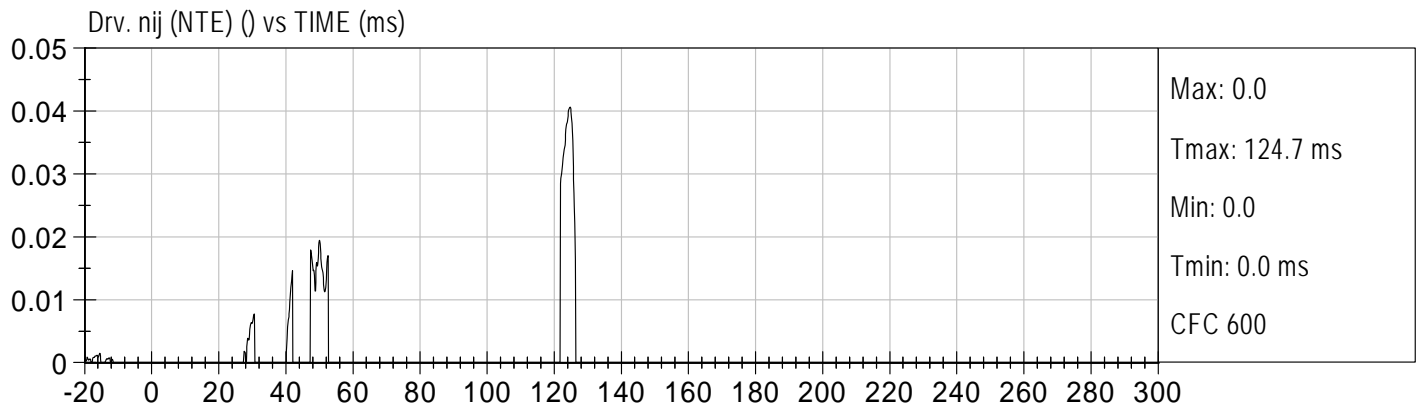
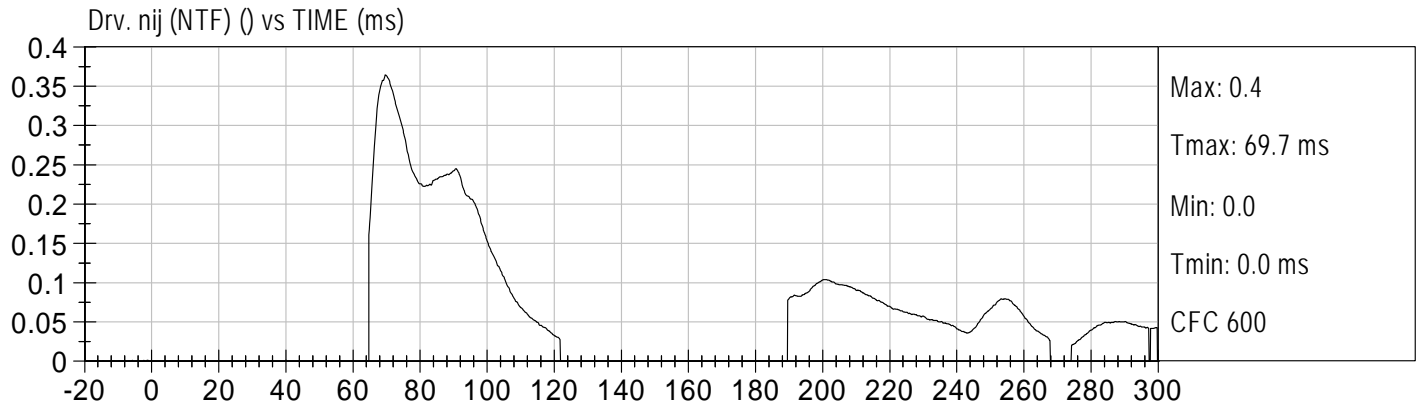


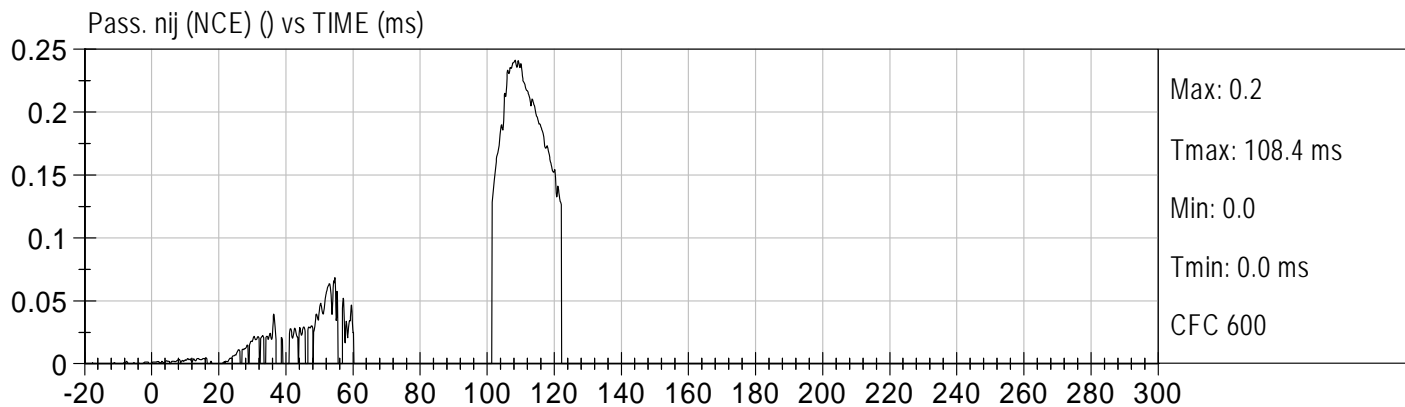
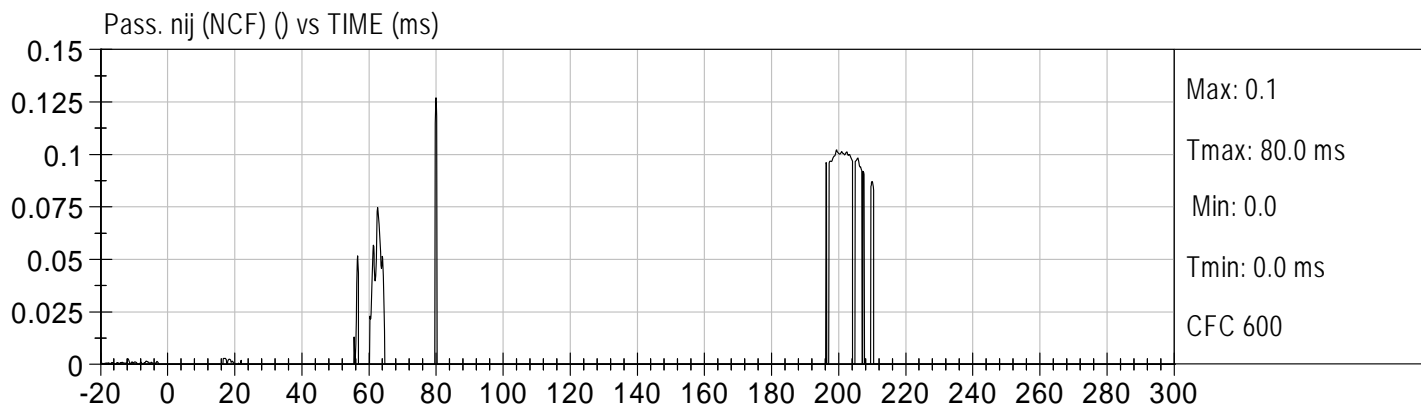
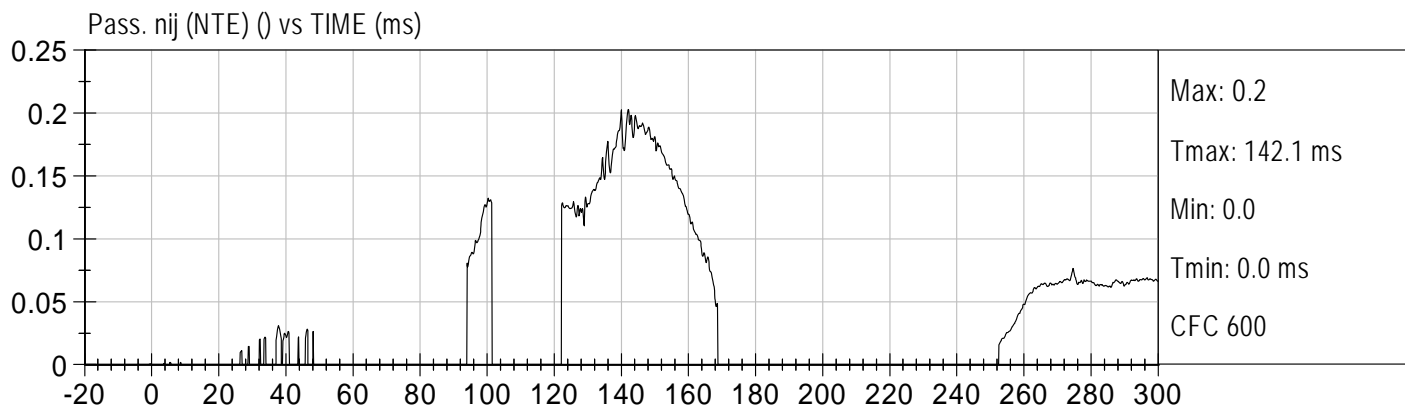
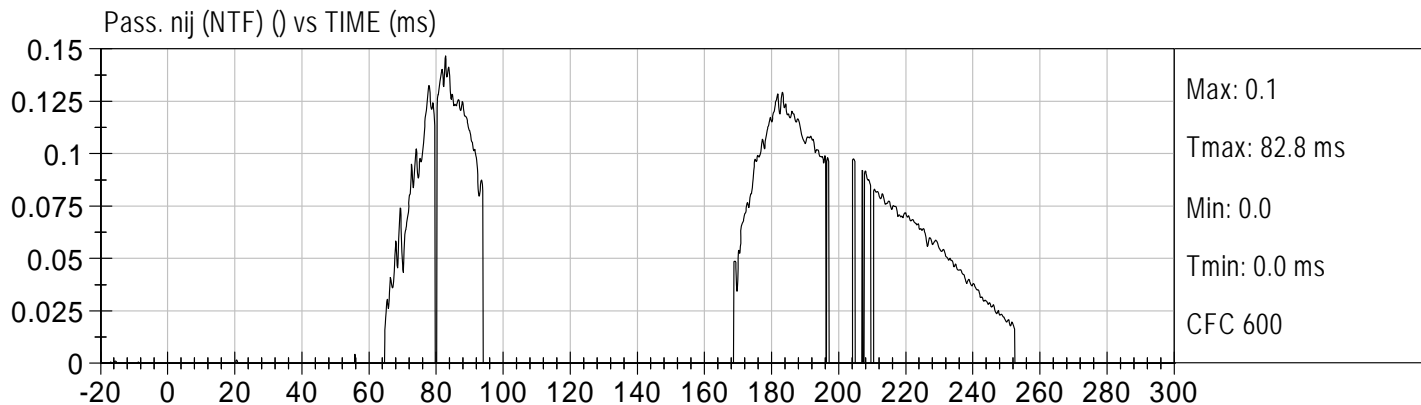


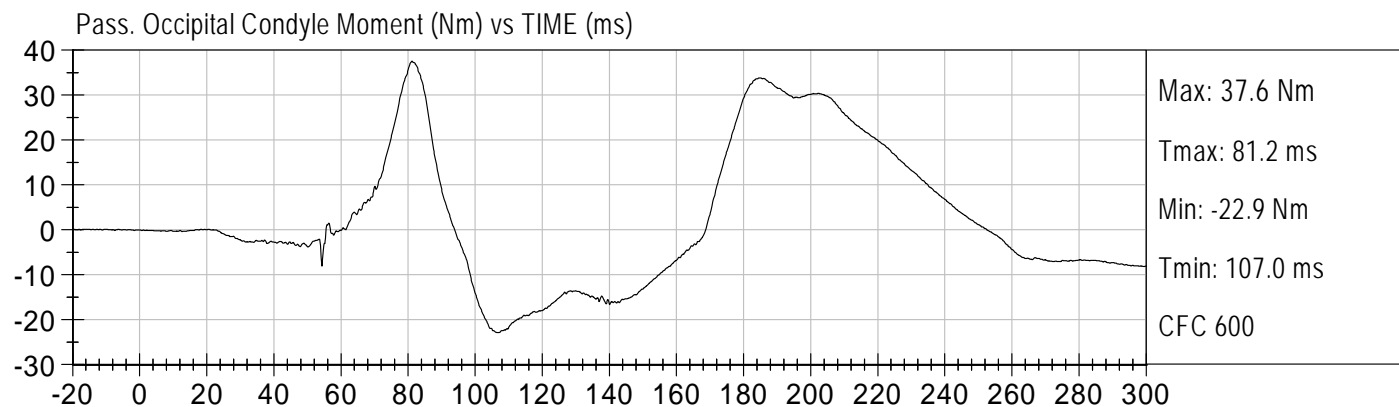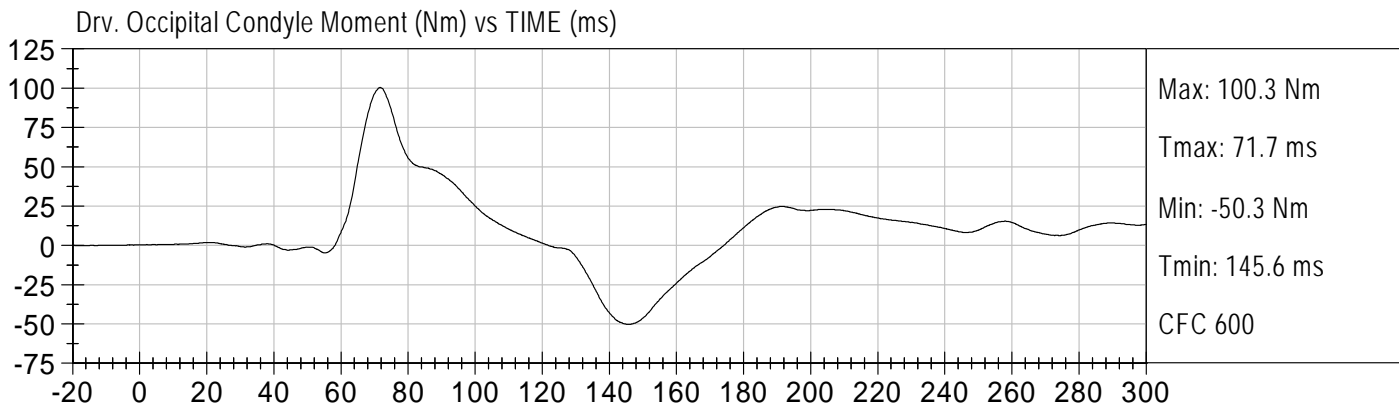

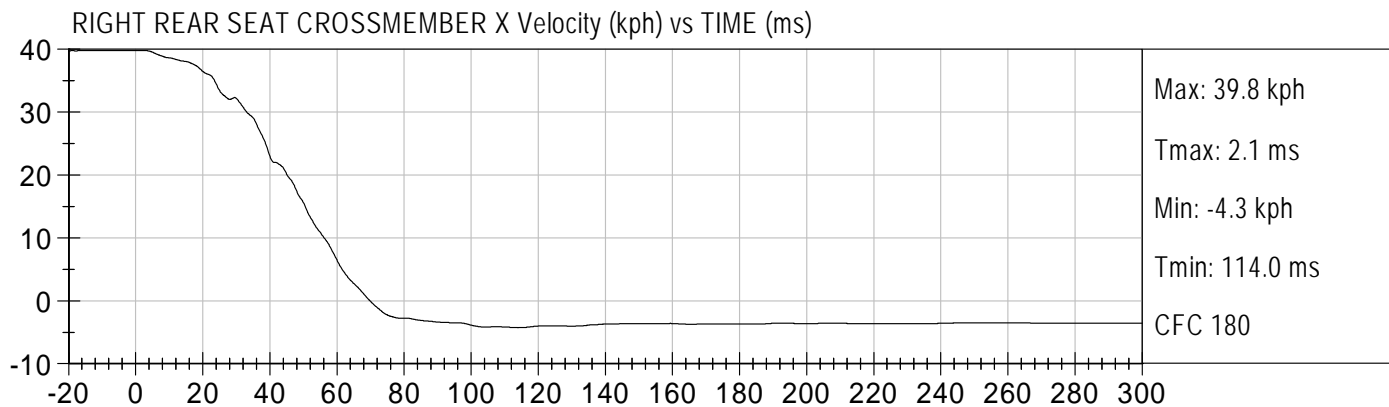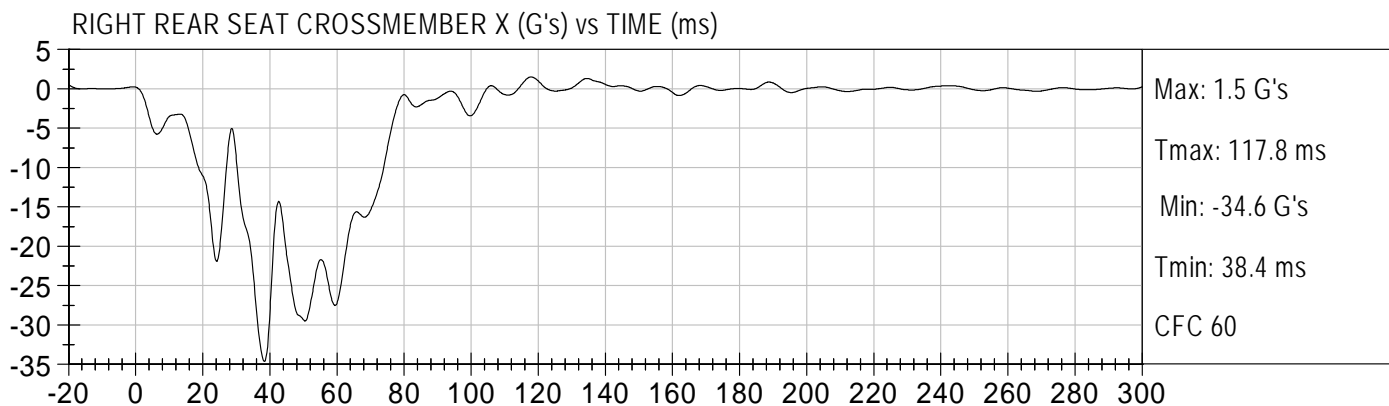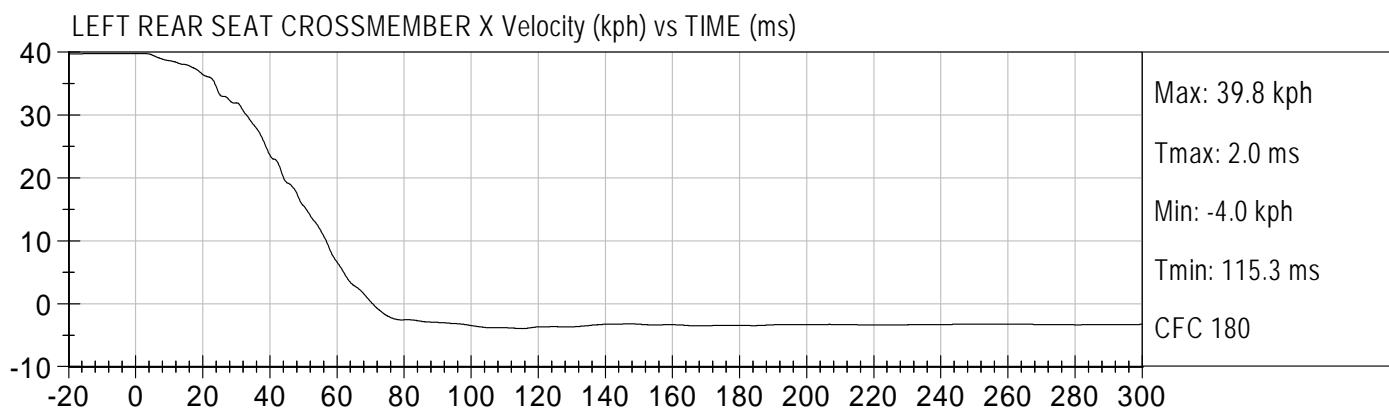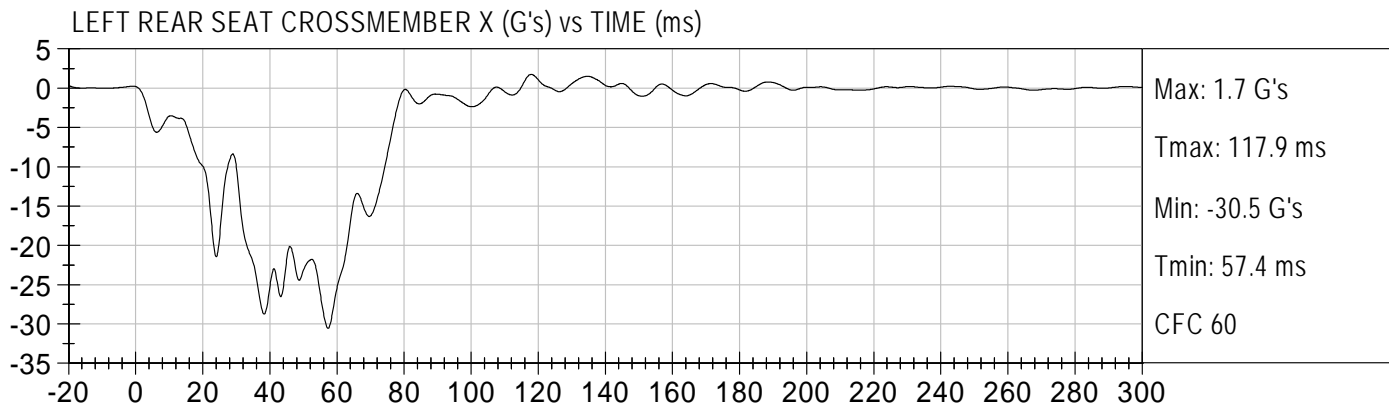

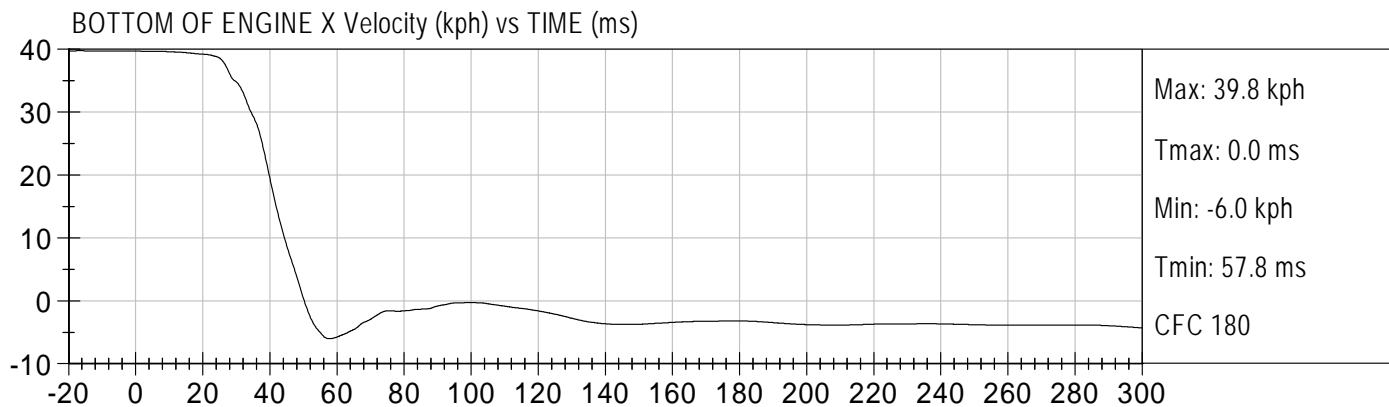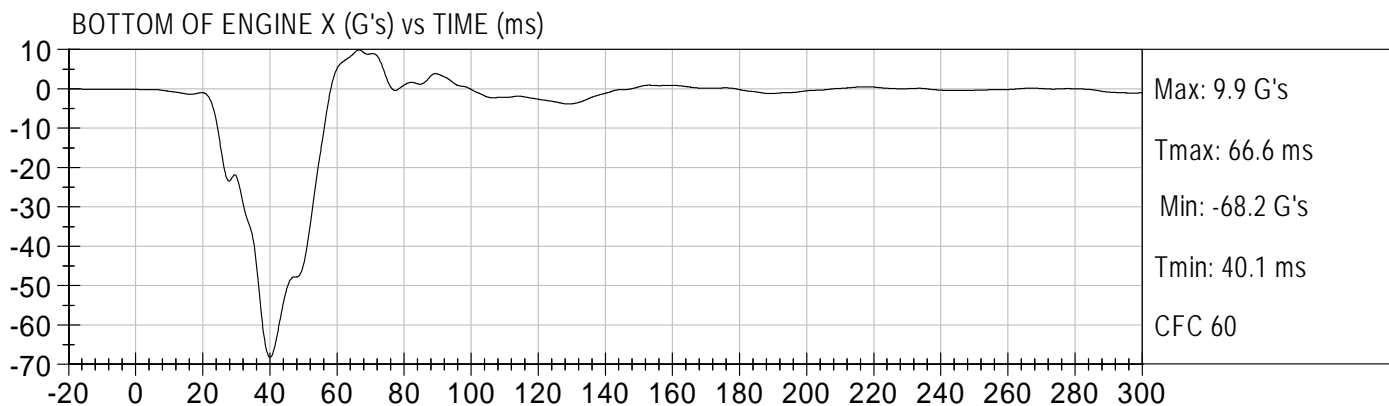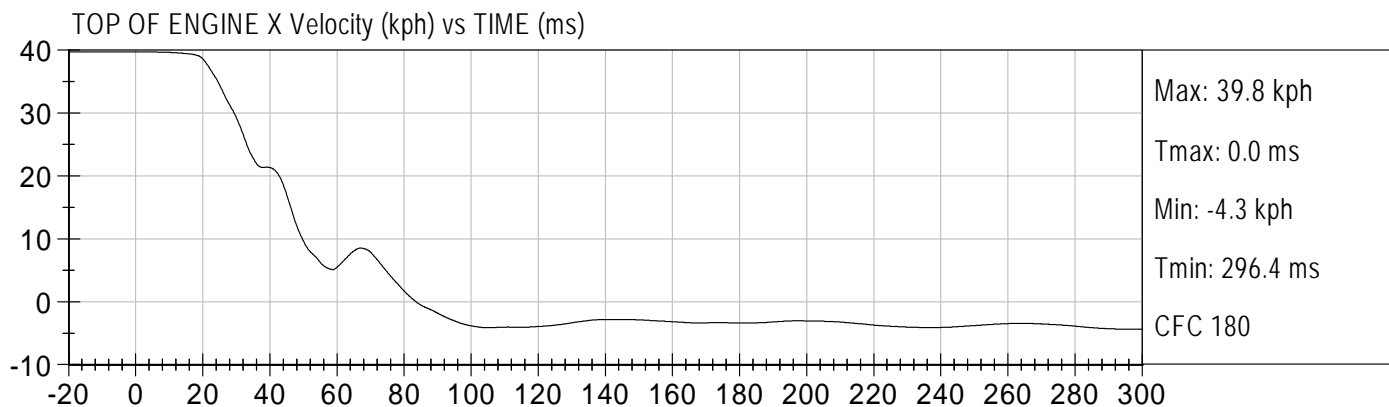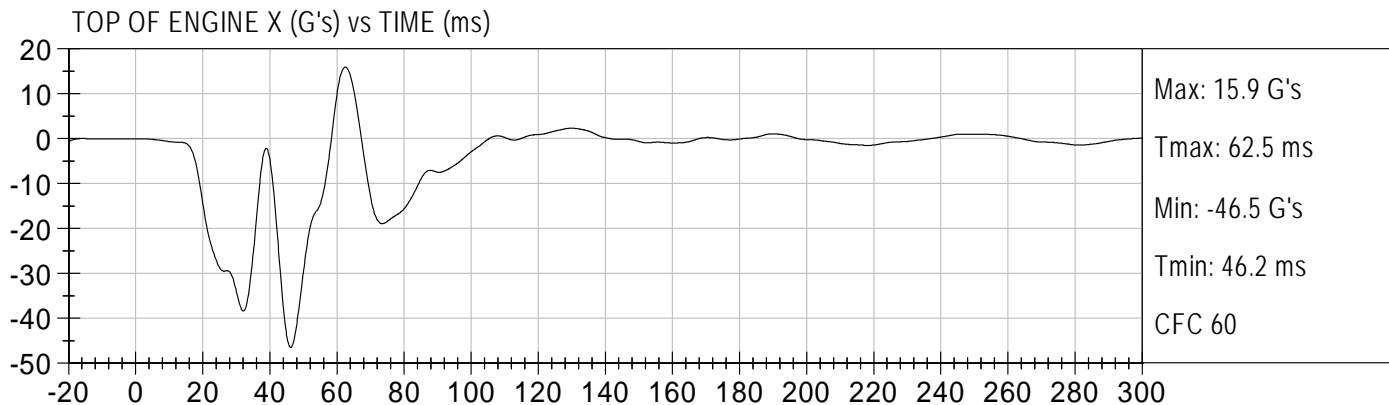

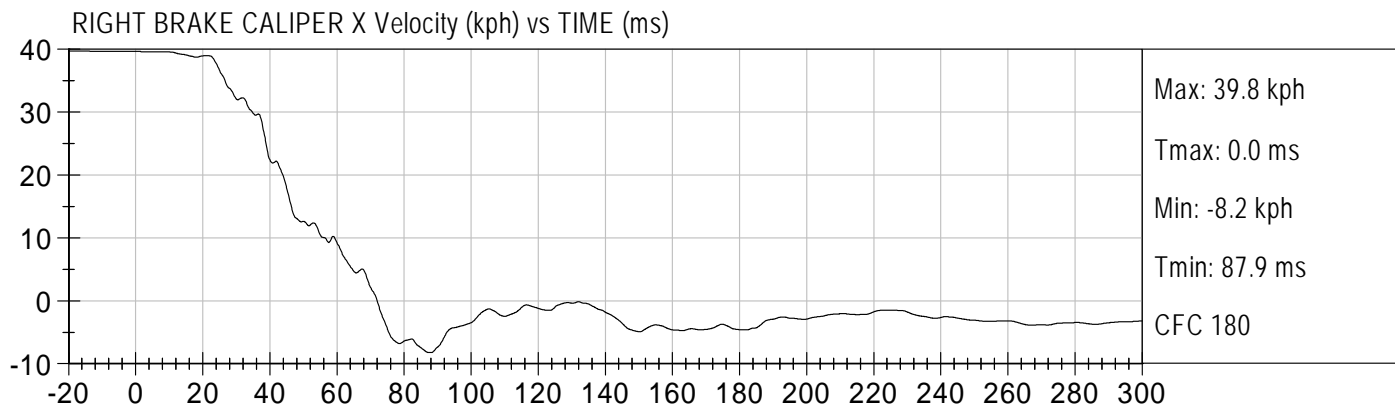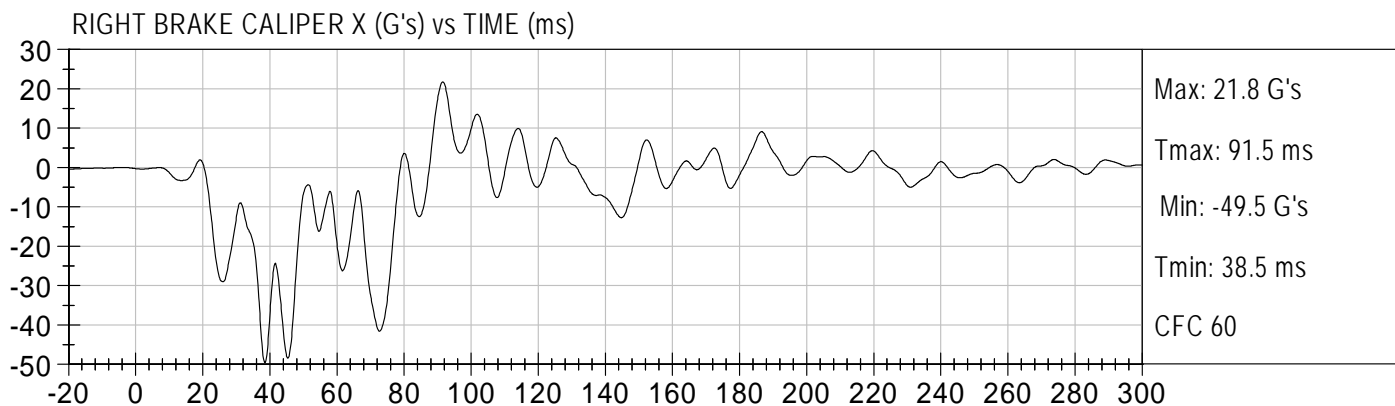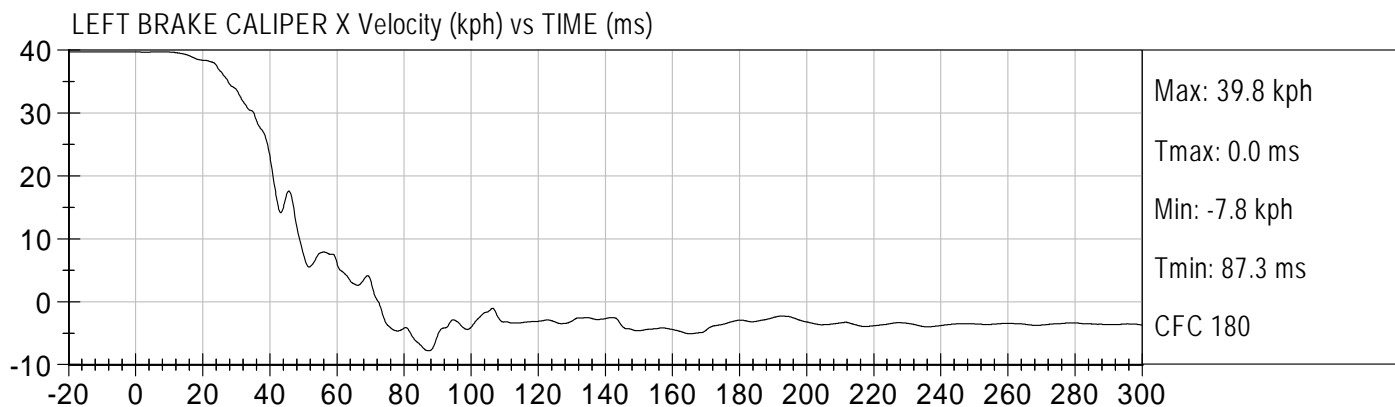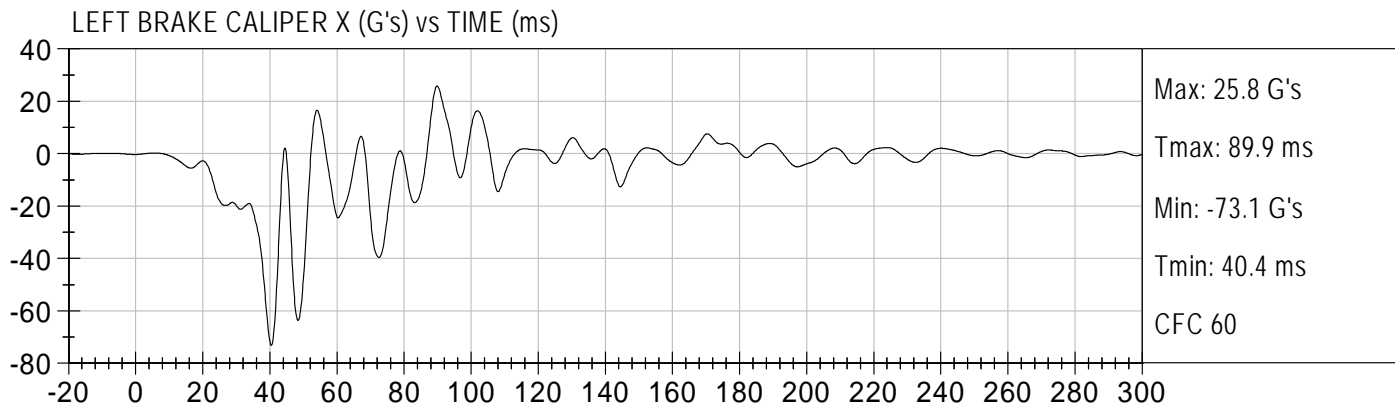

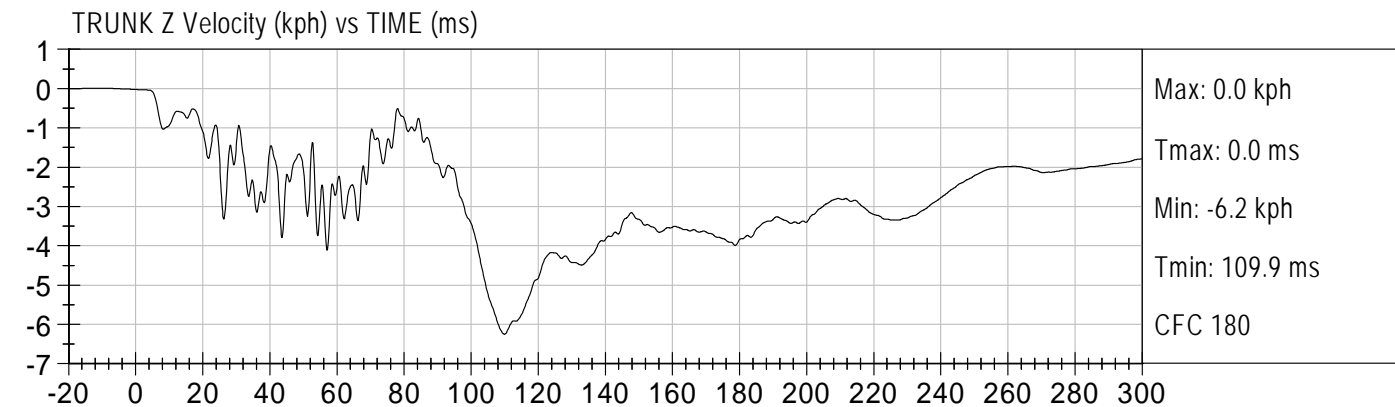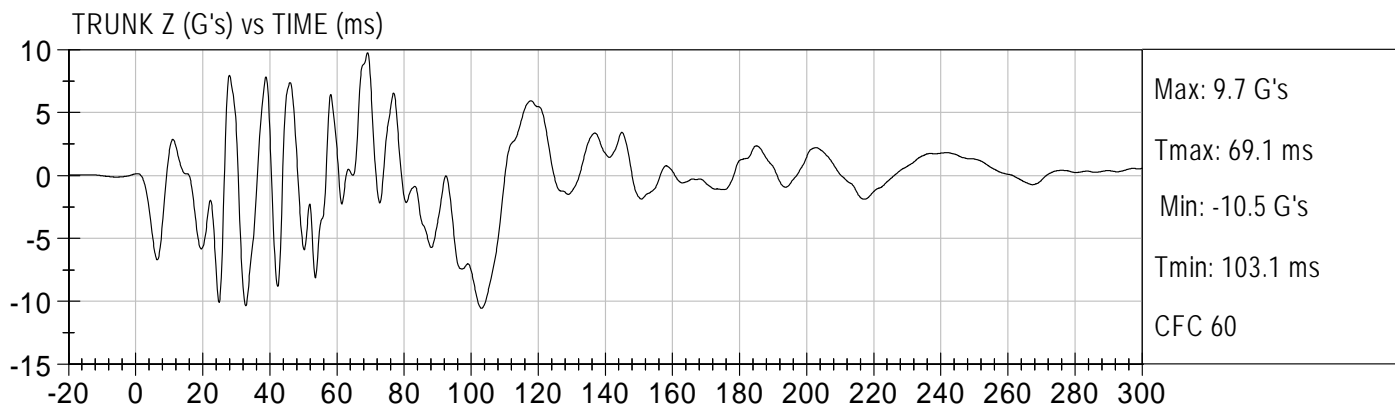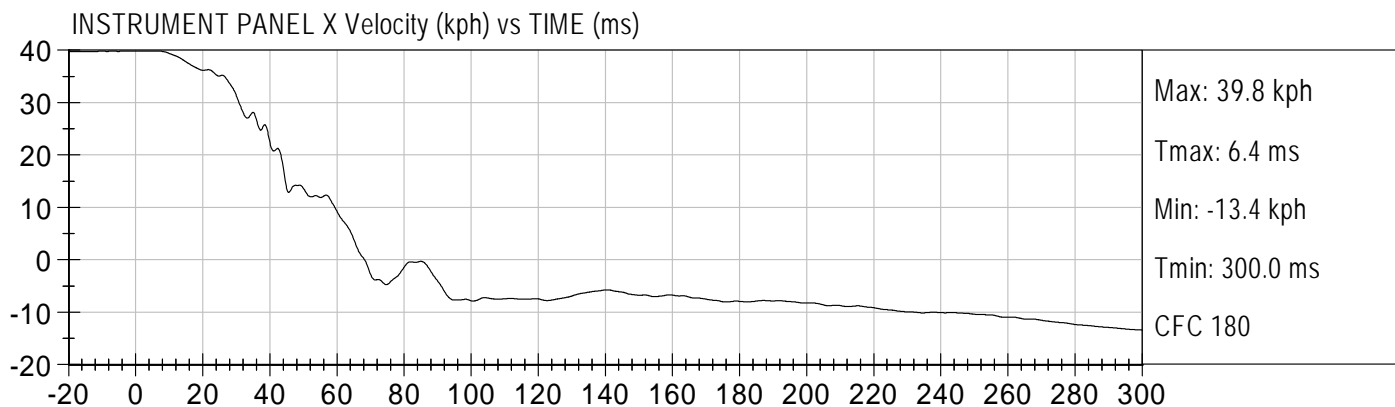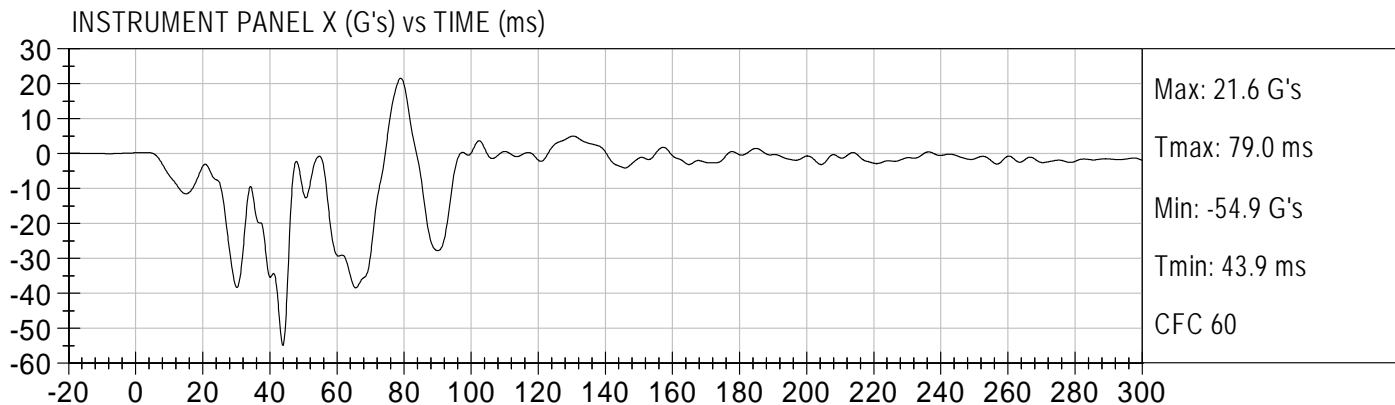

**APPENDIX B**  
**CRASH TEST PHOTOGRAPHS**  
**TABLE OF PHOTOGRAPHS**

	<u>Page No.</u>
Photo No. 1. Vehicle Certification Label	B-1
Photo No. 2. Tire Placard	B-2
Photo No. 3. Pre-Test Front View of Test Vehicle	B-3
Photo No. 4. Post-Test Front View of Test Vehicle	B-4
Photo No. 5. Pre-Test Left Side View of Test Vehicle	B-5
Photo No. 6. Post-Test Left Side View of Test Vehicle	B-6
Photo No. 7. Pre-Test Right Side View of Test Vehicle	B-7
Photo No. 8. Post-Test Right Side View of Test Vehicle	B-8
Photo No. 9. Pre-Test Left Front Three-Quarter View of Test Vehicle	B-9
Photo No. 10. Post-Test Left Front Three-Quarter View of Test Vehicle	B-10
Photo No. 11. Pre-Test Right Front Three-Quarter View of Test Vehicle	B-11
Photo No. 12. Post-Test Right Front Three-Quarter View of Test Vehicle	B-12
Photo No. 13. Pre-Test Right Rear Three-Quarter View of Test Vehicle	B-13
Photo No. 14. Post-Test Right Rear Three-Quarter View of Test Vehicle	B-14
Photo No. 15. Pre-Test Left Rear Three-Quarter View of Test Vehicle	B-15
Photo No. 16. Post-Test Left Rear Three-Quarter View of Test Vehicle	B-16
Photo No. 17. Pre-Test Rear View of Test Vehicle	B-17
Photo No. 18. Post-Test Rear View of Test Vehicle	B-18
Photo No. 19. Pre-Test Windshield View	B-19
Photo No. 20. Post-Test Windshield View	B-20
Photo No. 21. Pre-Test Engine Compartment View	B-21
Photo No. 22. Post-Test Engine Compartment View	B-22
Photo No. 23. Pre-Test Fuel Filler Cap View	B-23
Photo No. 24. Post-Test Fuel Filler Cap View	B-24

Page No.

Photo No. 25.	Pre-Test Front Underbody View	B-25
Photo No. 26.	Post-Test Front Underbody View	B-26
Photo No. 27.	Pre-Test Mid Front Underbody View	B-27
Photo No. 28.	Post-Test Mid Front Underbody View	B-28
Photo No. 29.	Pre-Test Mid Rear Underbody View	B-29
Photo No. 30.	Post-Test Mid Rear Underbody View	B-30
Photo No. 31.	Pre-Test Rear Underbody View	B-31
Photo No. 32.	Post-Test Rear Underbody View	B-32
Photo No. 33.	Pre-Test Driver Dummy Front View (head position)	B-33
Photo No. 34.	Post-Test Driver Dummy Front View (head position)	B-34
Photo No. 35.	Pre-Test Driver Dummy Position Left Side View	B-35
Photo No. 36.	Post-Test Driver Dummy Position Left Side View	B-36
Photo No. 37.	Pre-Test Driver Dummy Position Left Side View (door open)	B-37
Photo No. 38.	Post-Test Driver Dummy Position Left Side View (door open)	B-38
Photo No. 39.	Pre-Test Driver Dummy Seat Position	B-39
Photo No. 40.	Post-Test Driver Dummy Seat Position	B-40
Photo No. 41.	Pre-Test Driver Dummy Feet Position	B-41
Photo No. 42.	Post-Test Driver Dummy Feet Position	B-42
Photo No. 43.	Pre-Test Driver Side Knee Bolster View	B-43
Photo No. 44.	Post-Test Driver Side Knee Bolster View	B-44
Photo No. 45.	Post-Test Driver Dummy Airbag Contact	B-45
Photo No. 46.	Post-Test Driver Dummy Head Contact (visor)	B-46
Photo No. 47.	Post-Test Driver Dummy Head Contact (windshield)	B-47
Photo No. 48.	Post-Test Driver Dummy Head Contact (rearview mirror)	B-48
Photo No. 49.	Post-Test Driver Dummy Knee Contact	B-49
Photo No. 50.	Pre-Test Passenger Dummy Front View (head position)	B-50
Photo No. 51.	Post-Test Passenger Dummy Front View (head position)	B-51

	<u>Page No.</u>
Photo No. 52. Pre-Test Passenger Dummy Position Right Side View	B-52
Photo No. 53. Post-Test Passenger Dummy Position Right Side View	B-53
Photo No. 54. Pre-Test Passenger Dummy Position Right Side View (door open)	B-54
Photo No. 55. Post-Test Passenger Dummy Position Right Side View (door open)	B-55
Photo No. 56. Pre-Test Passenger Dummy Seat Position	B-56
Photo No. 57. Post-Test Passenger Dummy Seat Position	B-57
Photo No. 58. Pre-Test Passenger Dummy Feet Position	B-58
Photo No. 59. Post-Test Passenger Dummy Feet Position	B-59
Photo No. 60. Pre-Test Passenger Side Knee Bolster View	B-60
Photo No. 61. Post-Test Passenger Side Knee Bolster View	B-61
Photo No. 62. Post-Test Passenger Dummy Airbag Contact	B-62
Photo No. 63. Post-Test Passenger Dummy Head Contact (visor)	B-63
Photo No. 64. Post-Test Passenger Dummy Head Contact (a-pillar)	B-64
Photo No. 65. Post-Test Passenger Dummy Knee Contact	B-65
Photo No. 66. Rollover 90 Degrees	B-66
Photo No. 67. Rollover 180 Degrees	B-67
Photo No. 68. Rollover 270 Degrees	B-68
Photo No. 69. Rollover 360 Degrees	B-69
Photo No. 70. Temperature Plot	B-70

# MFD. BY FORD MOTOR CO.

DATE: 09/09

FRONT GAWR: 1279KG/2820LB

GVWR: 2386KG/5260LB

REAR GAWR: 1143KG/2520LB

THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY, BUMPER, AND THEFT PREVENTION STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.

VIN: 1FAHP2DW7AG116528

TYPE: Passenger Car

MAXIMUM LOAD = OCCUPANTS + LUGGAGE = 430KG/ 950LB  
OCCUPANTS = 5 TOTAL; 2 FRONT, 3 REAR

TIRE (FR): P235/60R17

(RR): P235/60R17

RIMS (FR): 17x7.5J

(RR): 17x7.5J


PRESSURE (FR): 260 kPa/ 38

PSI COLD

(RR): 260

kPa/ 38

PSI COLD

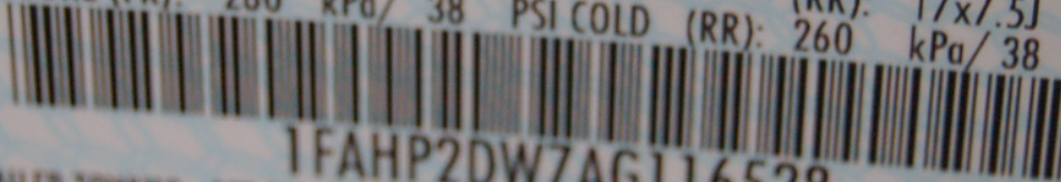

1FAHP2DW7AG116528

TRAILER TOWING - SEE OWNER GUIDE

EXT PNT: WS

INT TR

75

TOP/PS

2

TA

ARC S3

TR

SPR

ERCC

CMC

APHIN

TOA

F0126

R0126

1200MDP226299

USA 5420472-AA

B-1

Vehicle Certification Label



# TIRE AND LOADING INFORMATION

SEATING CAPACITY TOTAL : 5 FRONT: 2 REAR: 3


The combined weight of occupants and cargo should never exceed : 430 kg or 950 lbs.

5U5A-1532-AA (TLU)

TIRE	SIZE	COLD TIRE PRESSURE
FRONT	P235/60R17	260 KPA, 38 PSI
REAR	P235/60R17	260 KPA, 38 PSI
SPARE	T155/70D17	415 KPA, 60 PSI

**SEE OWNERS  
MANUAL FOR  
ADDITIONAL  
INFORMATION**

1FAHP2DW7AG116528



Tire Placard



Pre-Test Front View of Test Vehicle

B-4



Post-Test Front View of Test Vehicle

B-5



Pre-Test Left Side View of Test Vehicle

B-6



Post-Test Left Side View of Test Vehicle

B-7



Pre-Test Right Side View of Test Vehicle



Post-Test Right Side View of Test Vehicle



Pre-Test Left Front Three-Quarter View of Test Vehicle



Post-Test Left Front Three-Quarter View of Test Vehicle

B-11



Pre-Test Right Front Three-Quarter View of Test Vehicle



Post-Test Right Front Three-Quarter View of Test Vehicle



Pre-Test Right Rear Three-Quarter View of Test Vehicle



Post-Test Right Rear Three-Quarter View of Test Vehicle



Pre-Test Left Rear Three-Quarter View of Test Vehicle



Post-Test Left Rear Three-Quarter View of Test Vehicle





Post-Test Rear View of Test Vehicle



Pre-Test Windshield View

B-20



Post-Test Windshield View

B-21




Pre-Test Engine Compartment View



Post-Test Engine Compartment View

B-23

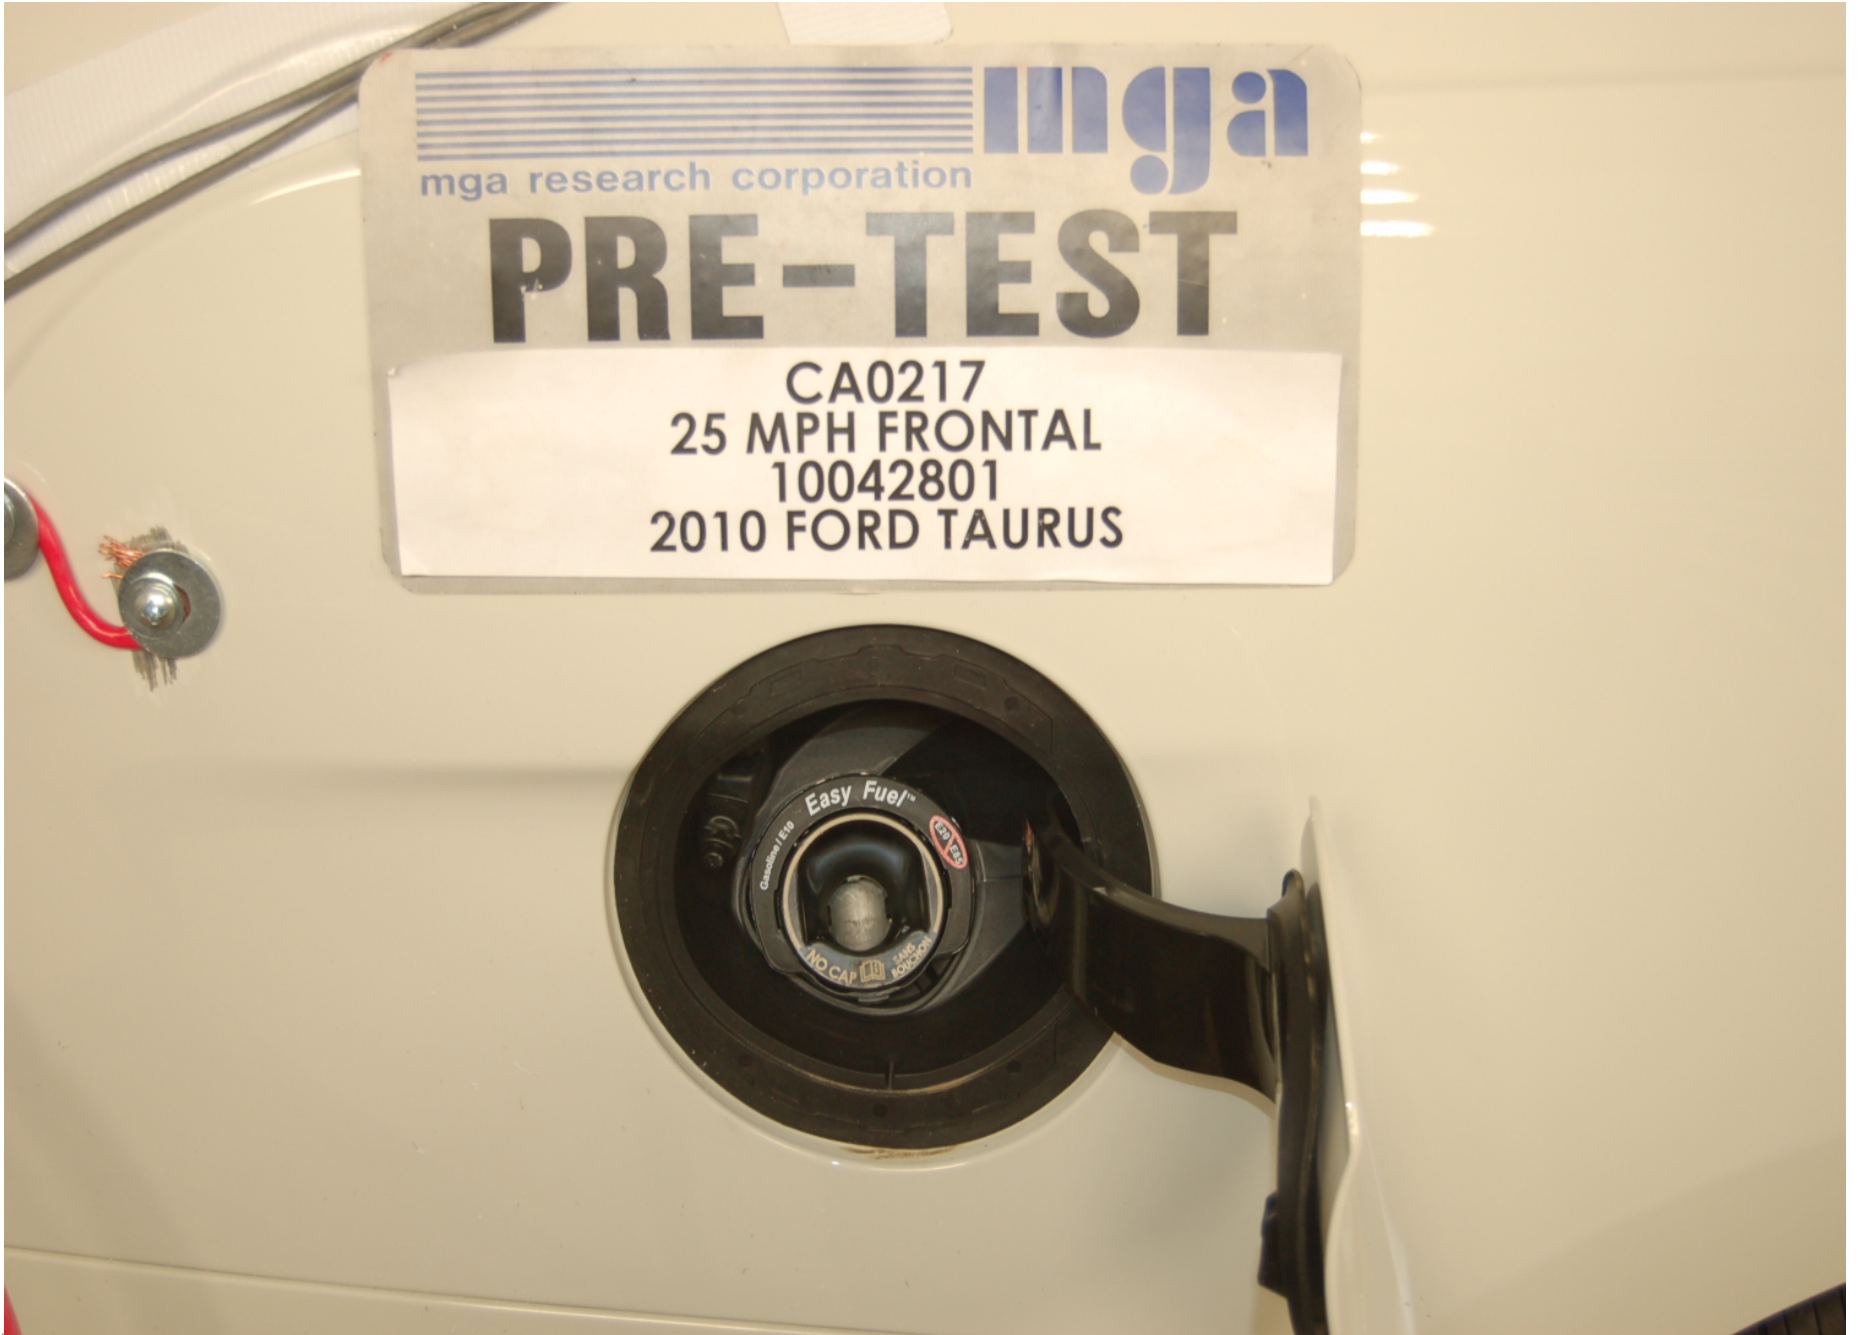


Pre-Test Fuel Filler Cap View




B-24


Post-Test Fuel Filler Cap View

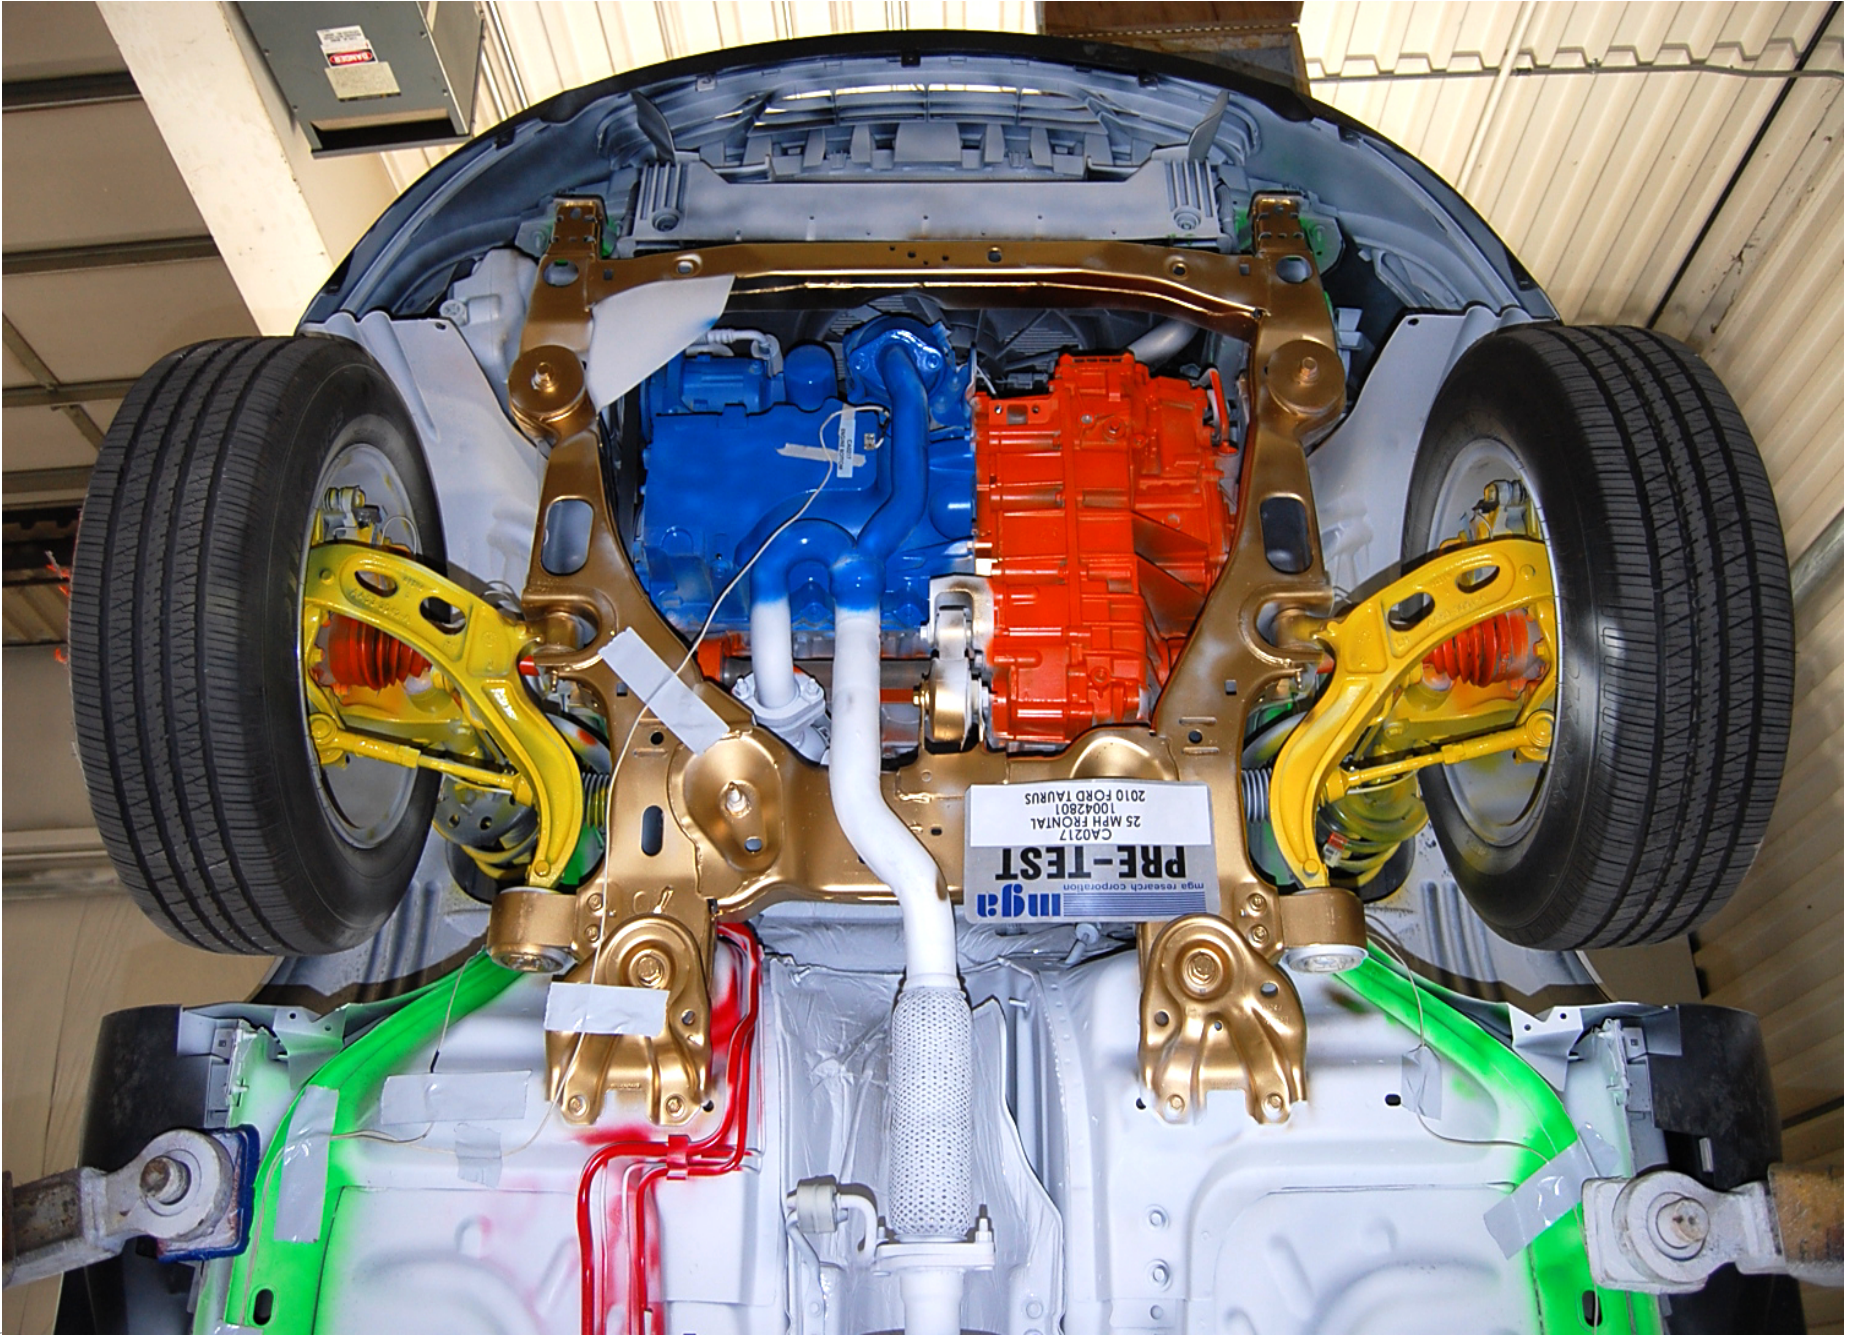


Pre-Test Front Underbody View

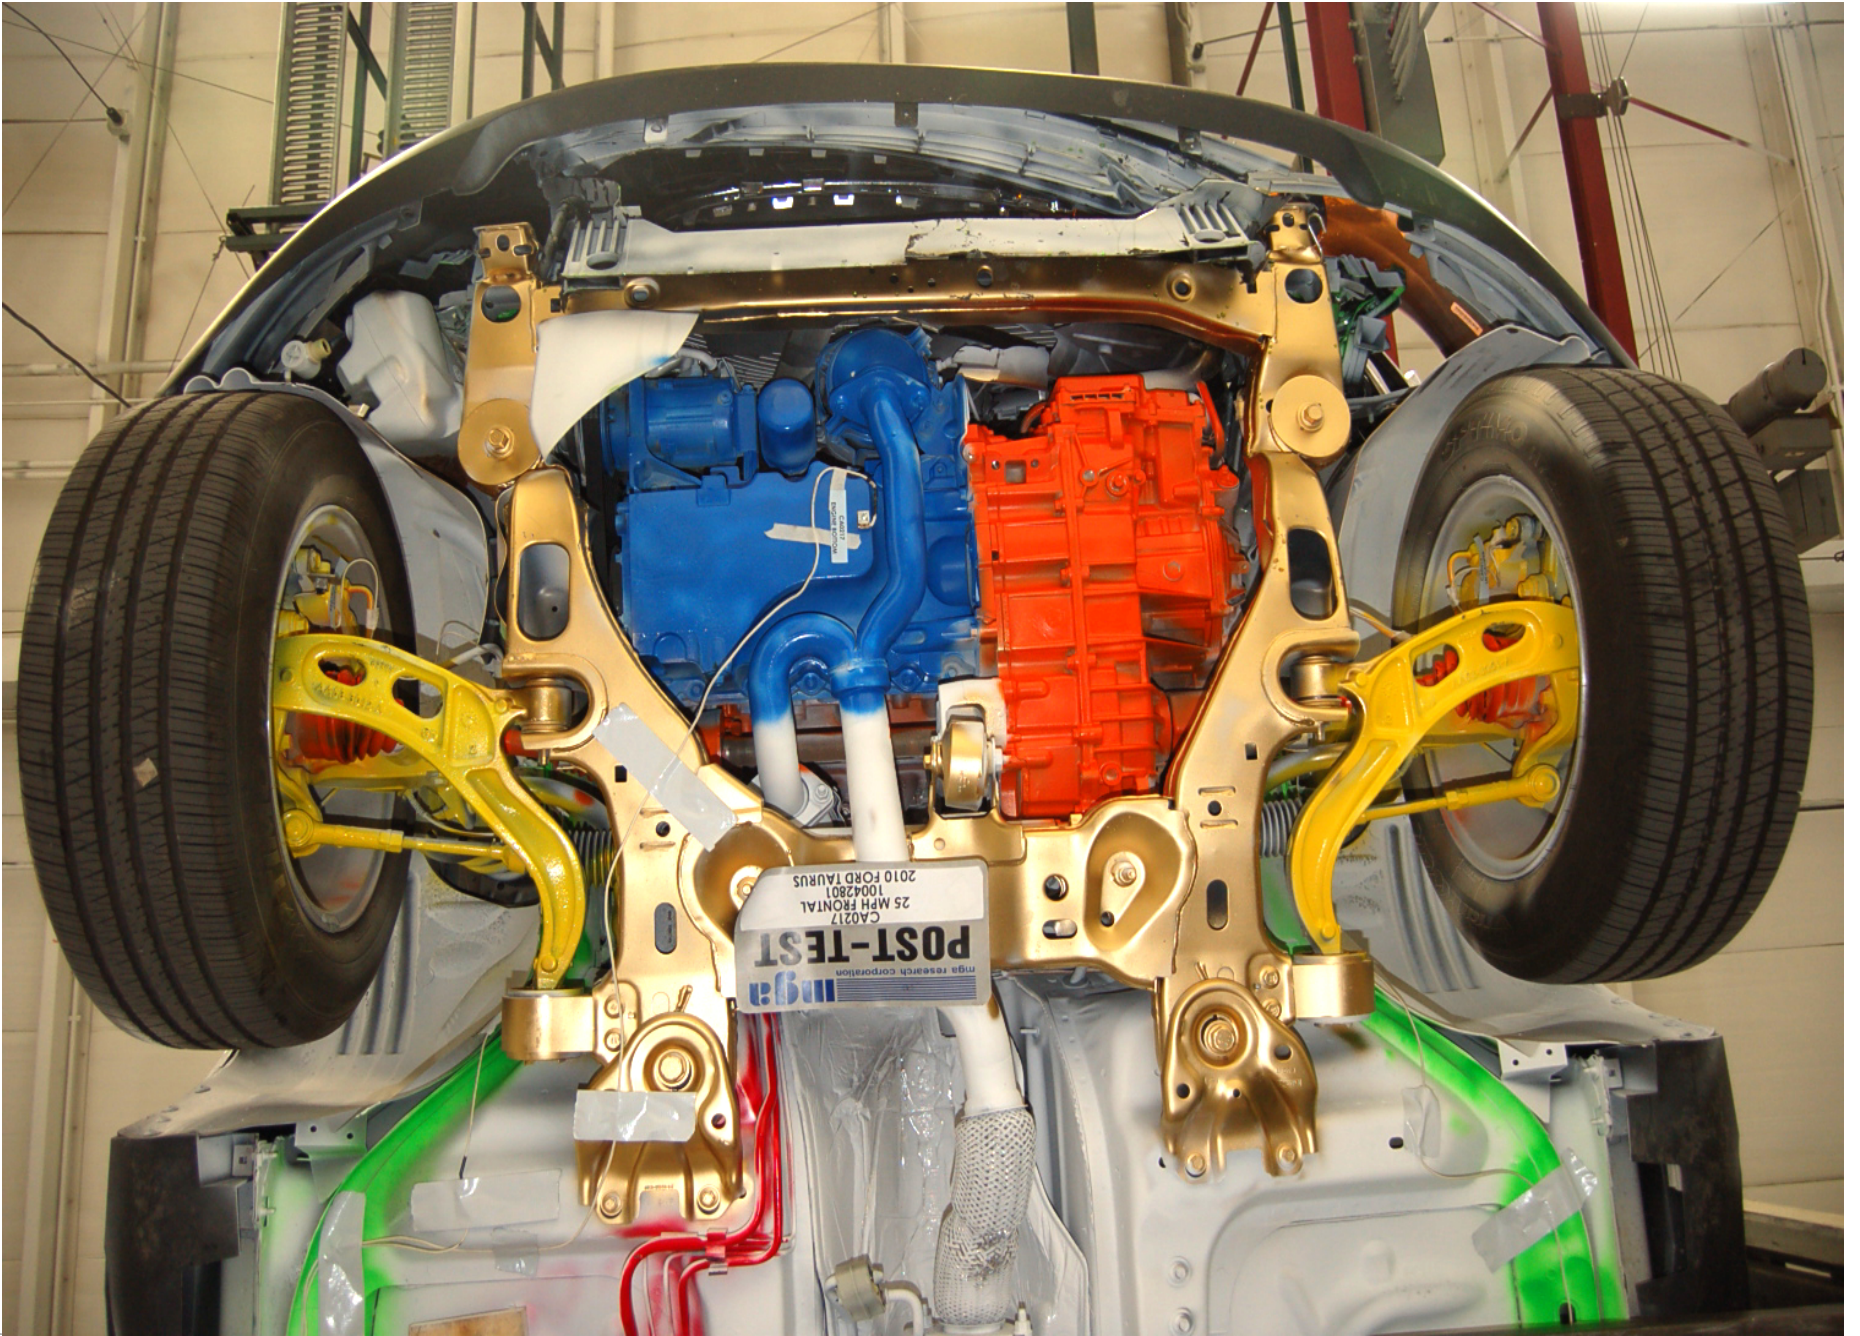

Post-Test Front Underbody View

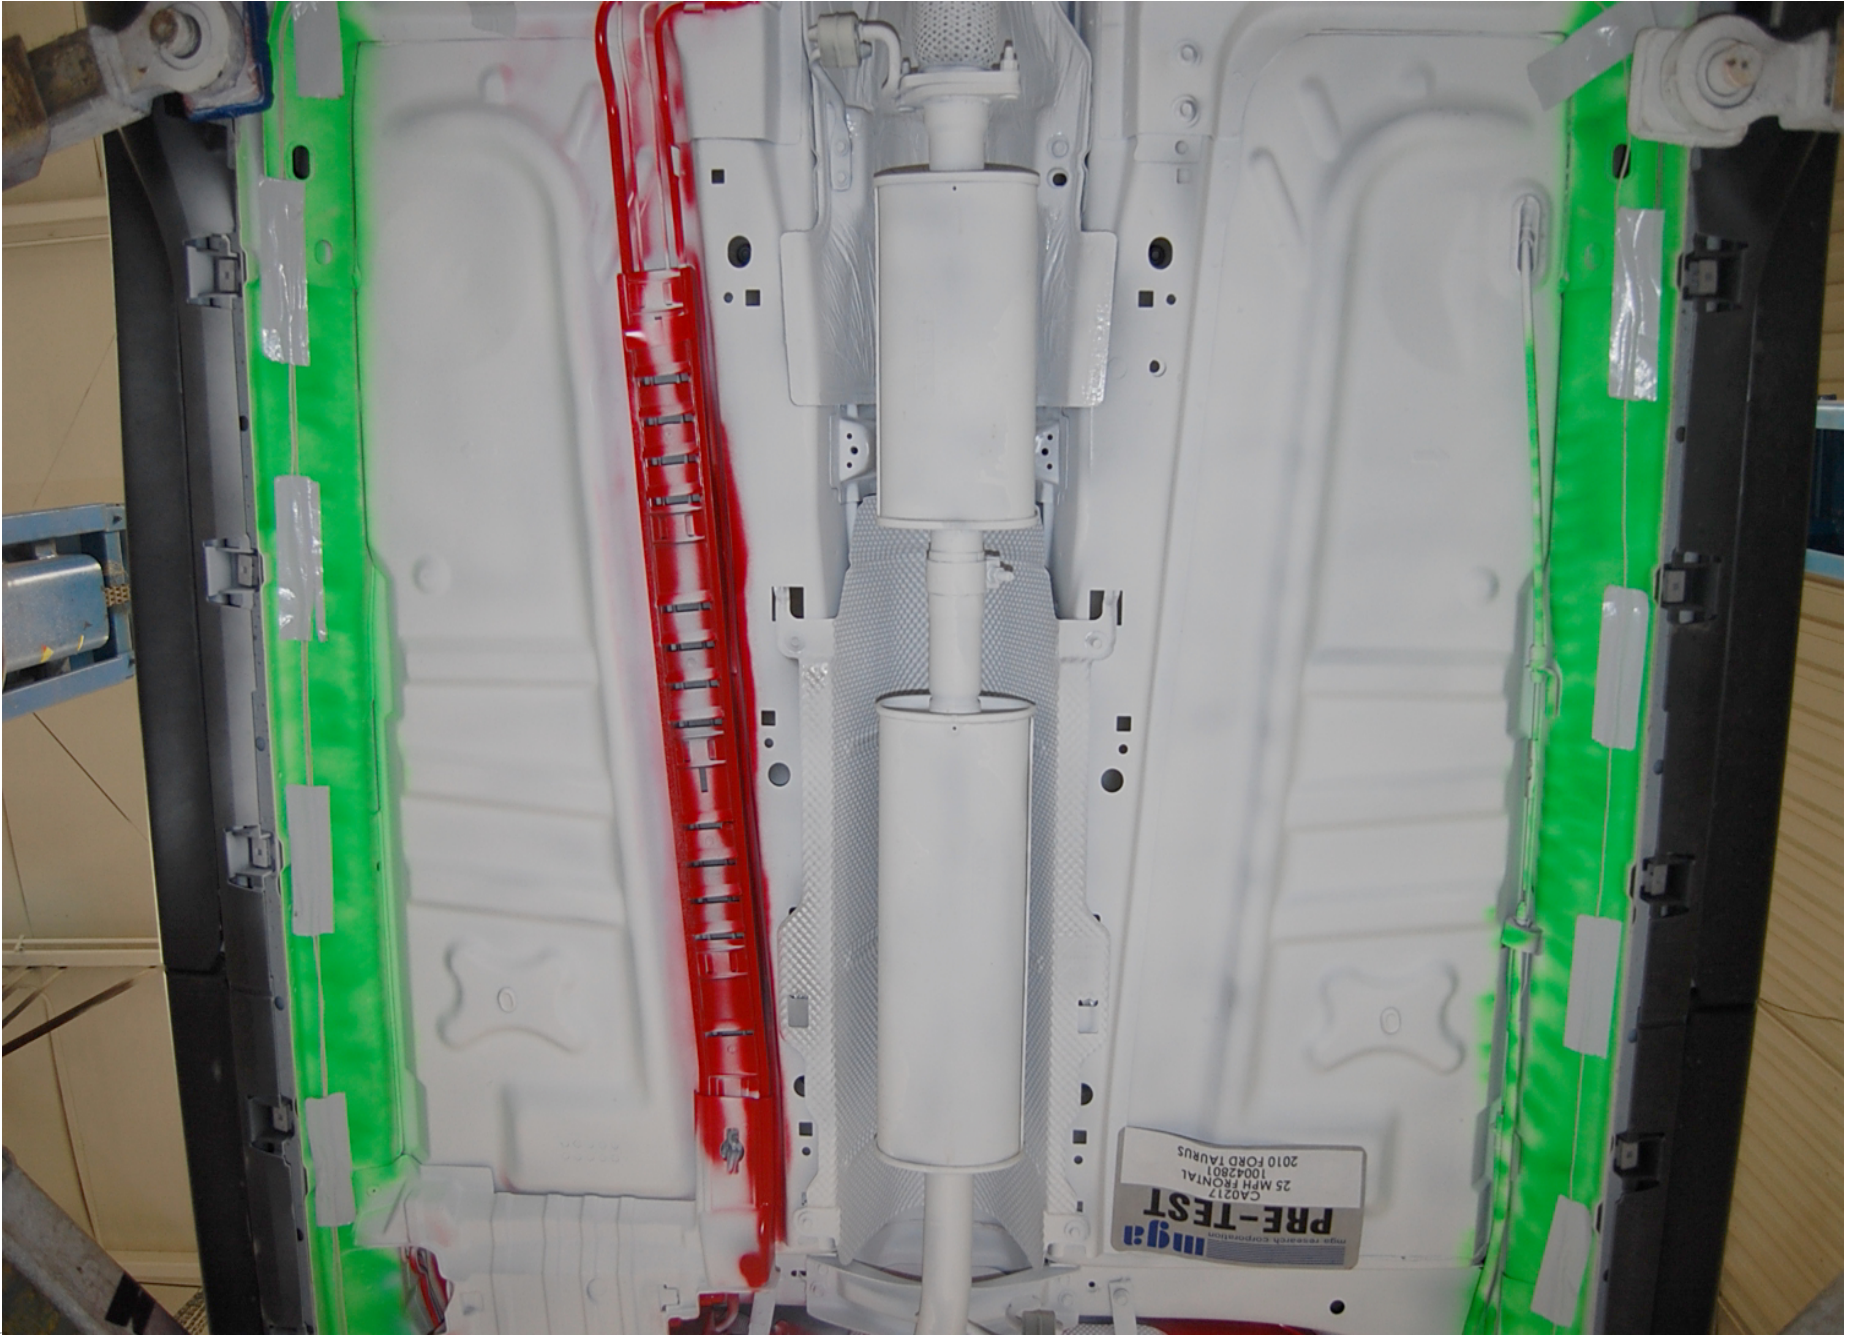


Pre-Test Mid Front Underbody View

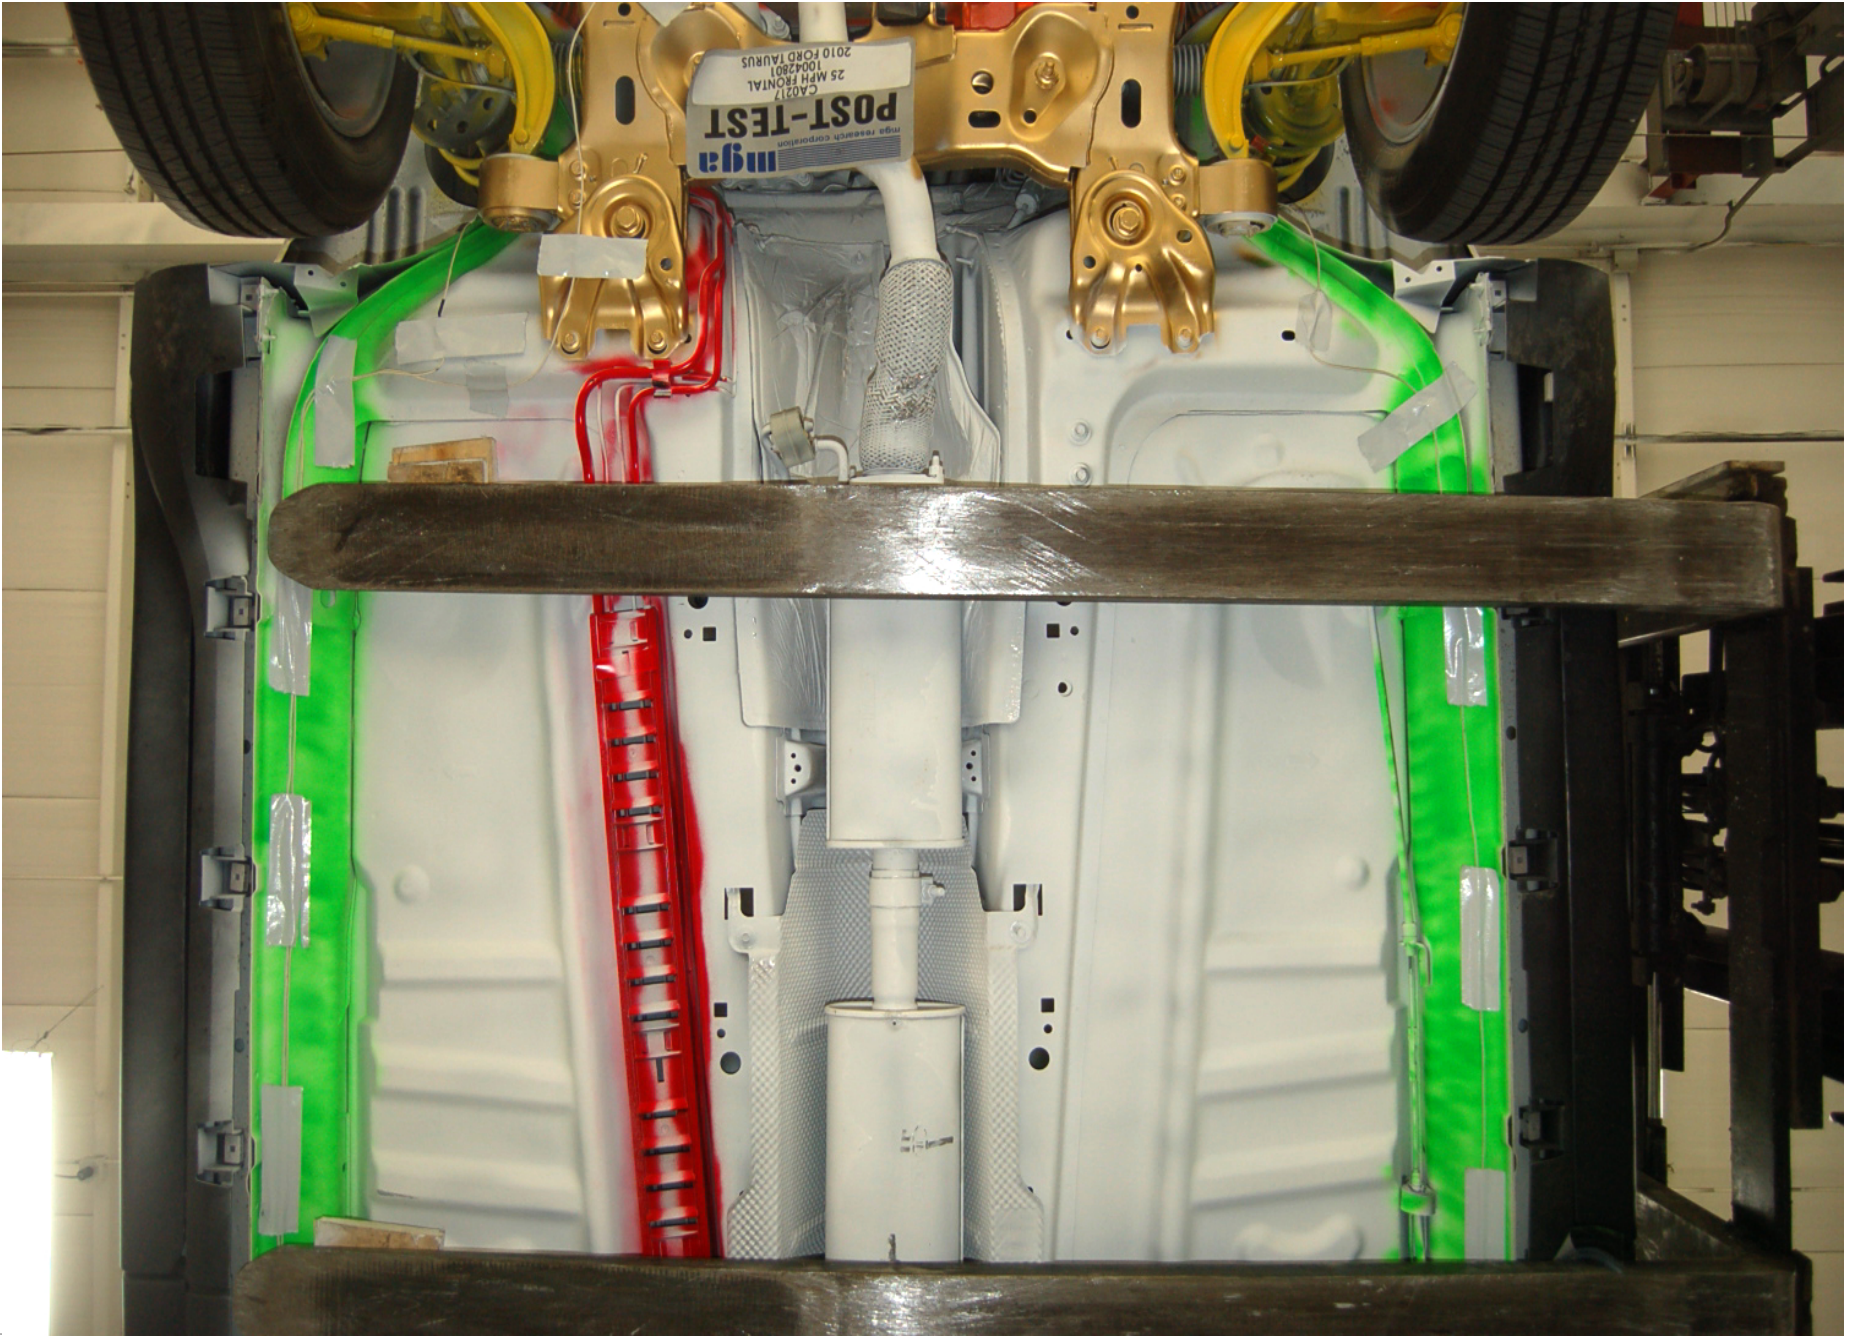

Post-Test Mid Front Underbody View




Pre-Test Mid Rear Underbody View

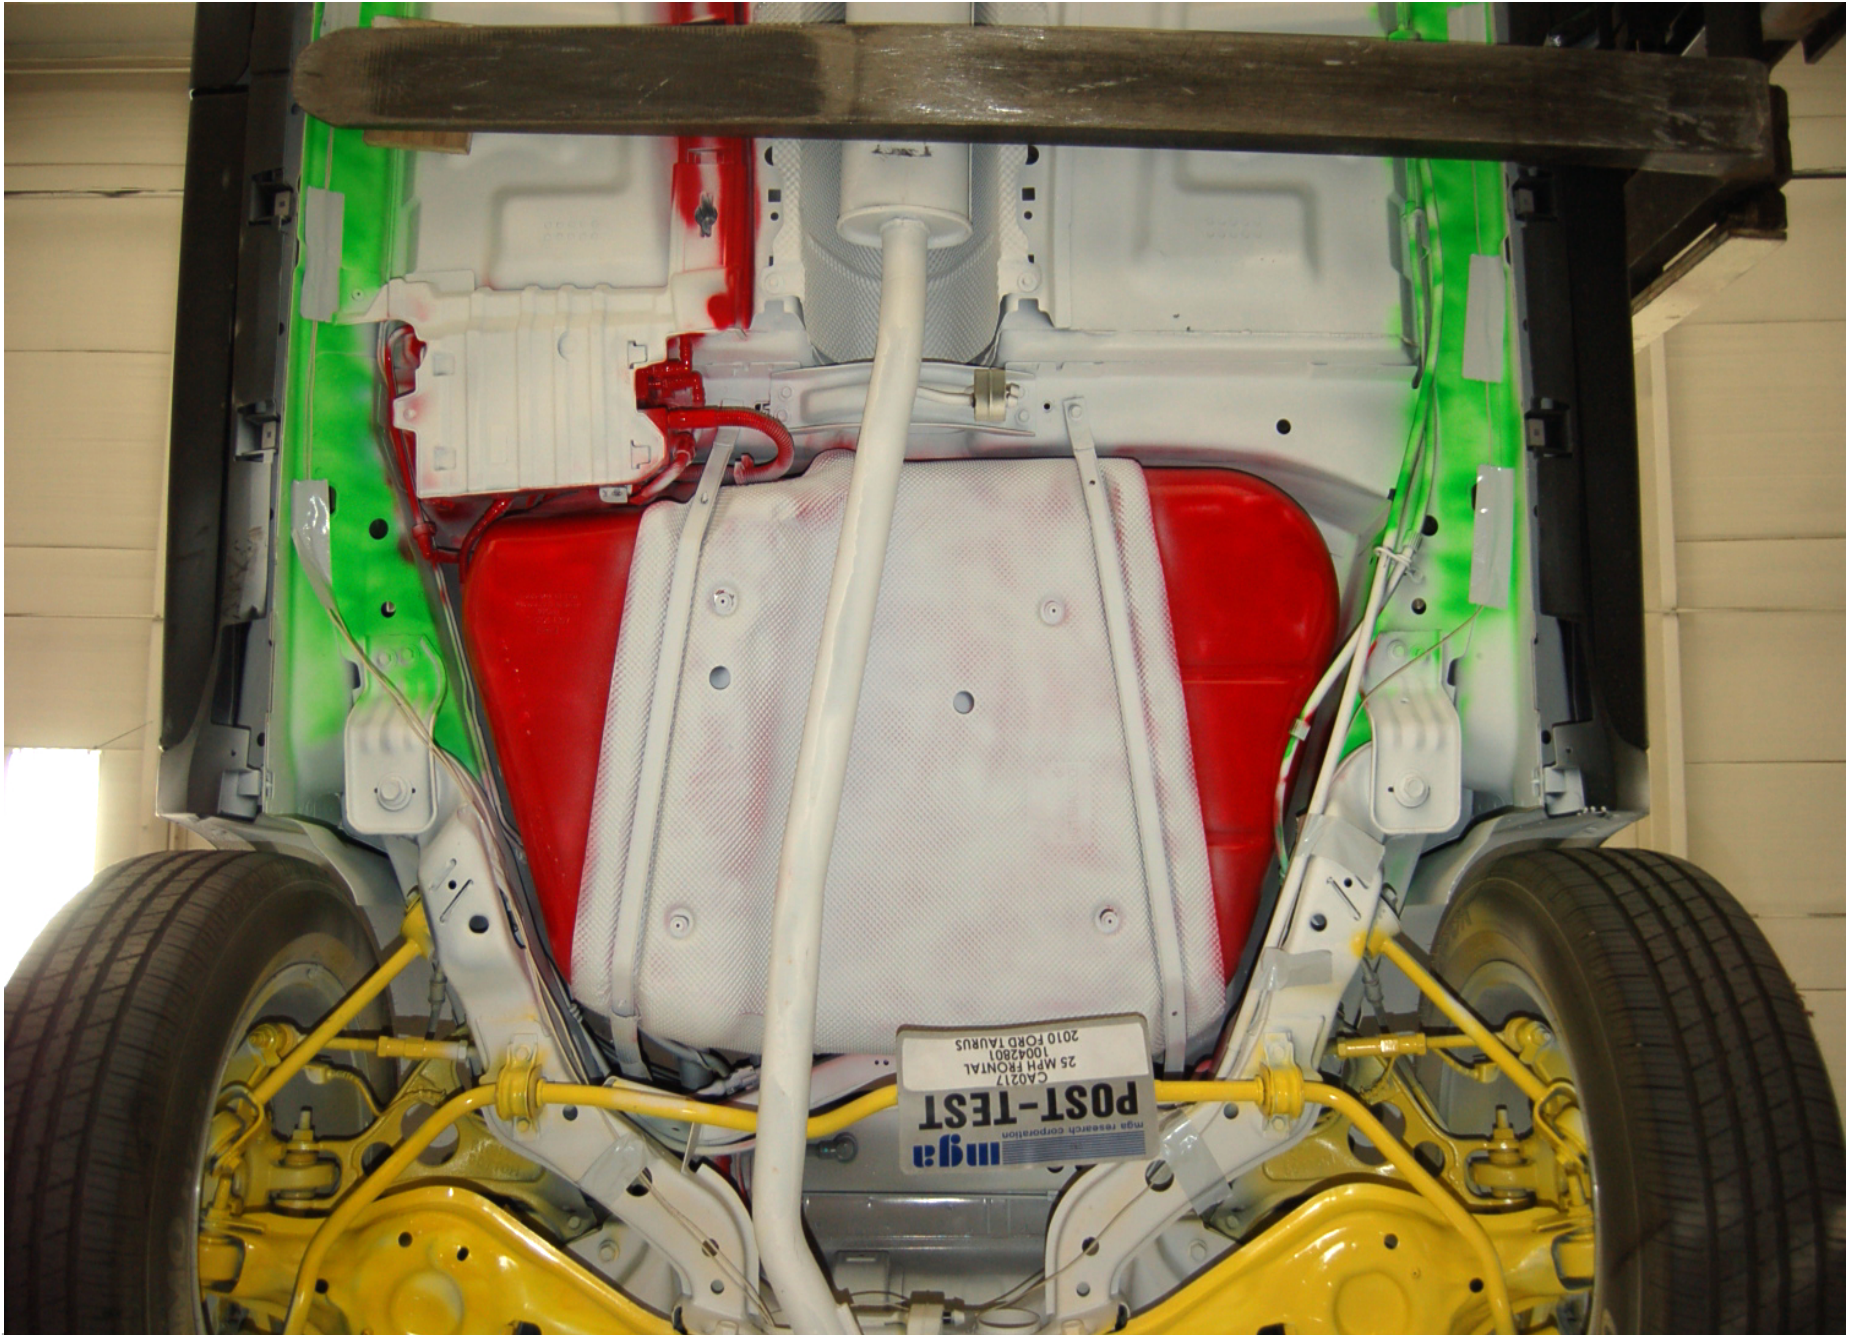

Post-Test Mid Rear Underbody View



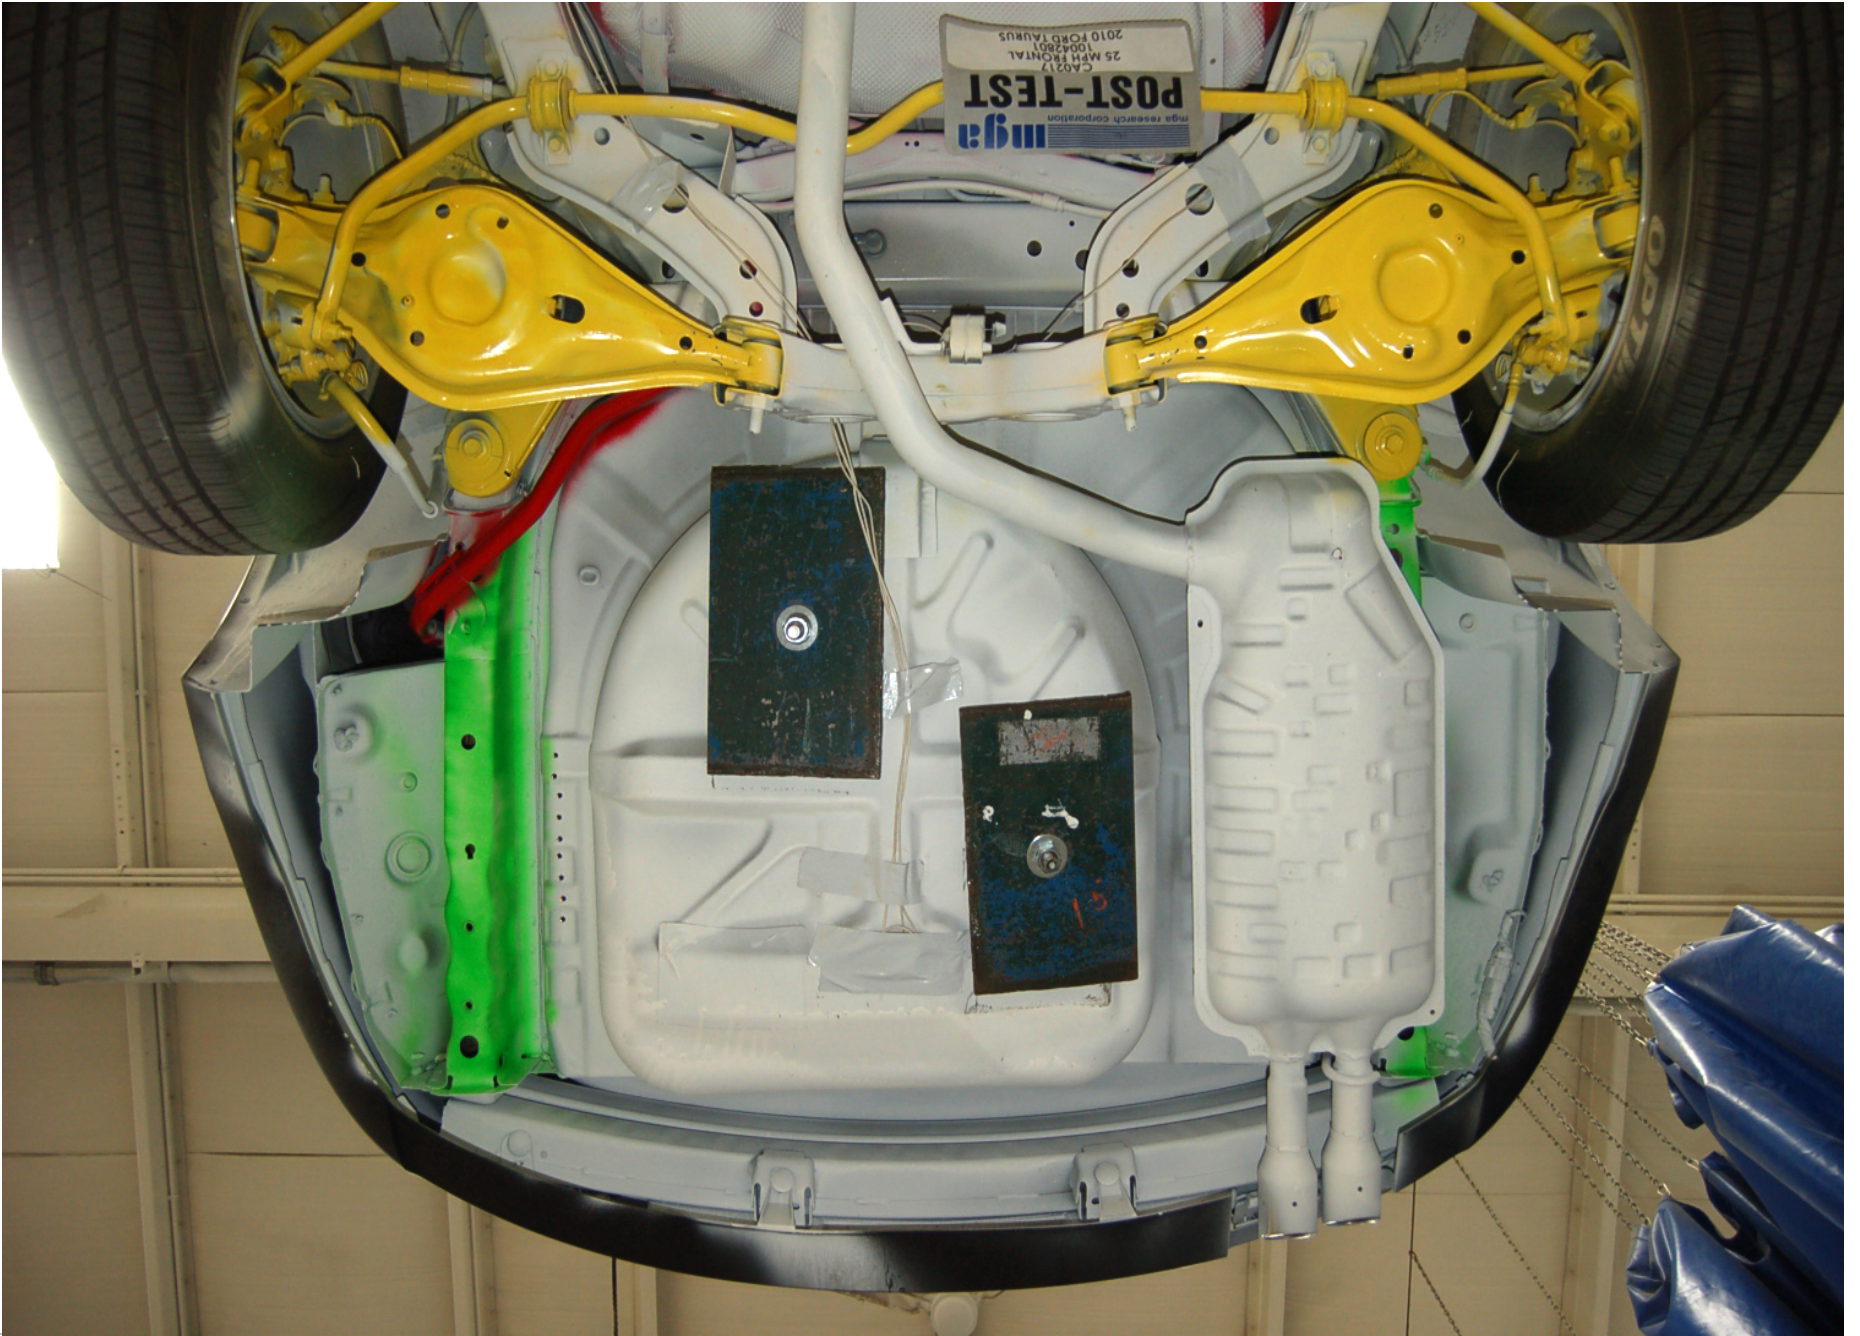

Post-Test Rear Underbody View



Pre-Test Driver Dummy Front View (head position)



Post-Test Driver Dummy Front View (head position)



Pre-Test Driver Dummy Position Left Side View



Post-Test Driver Dummy Position Left Side View



Pre-Test Driver Dummy Position Left Side View (door open)




Post-Test Driver Dummy Position Left Side View (door open)



Pre-Test Driver Dummy Seat Position



Post-Test Driver Dummy Seat Position

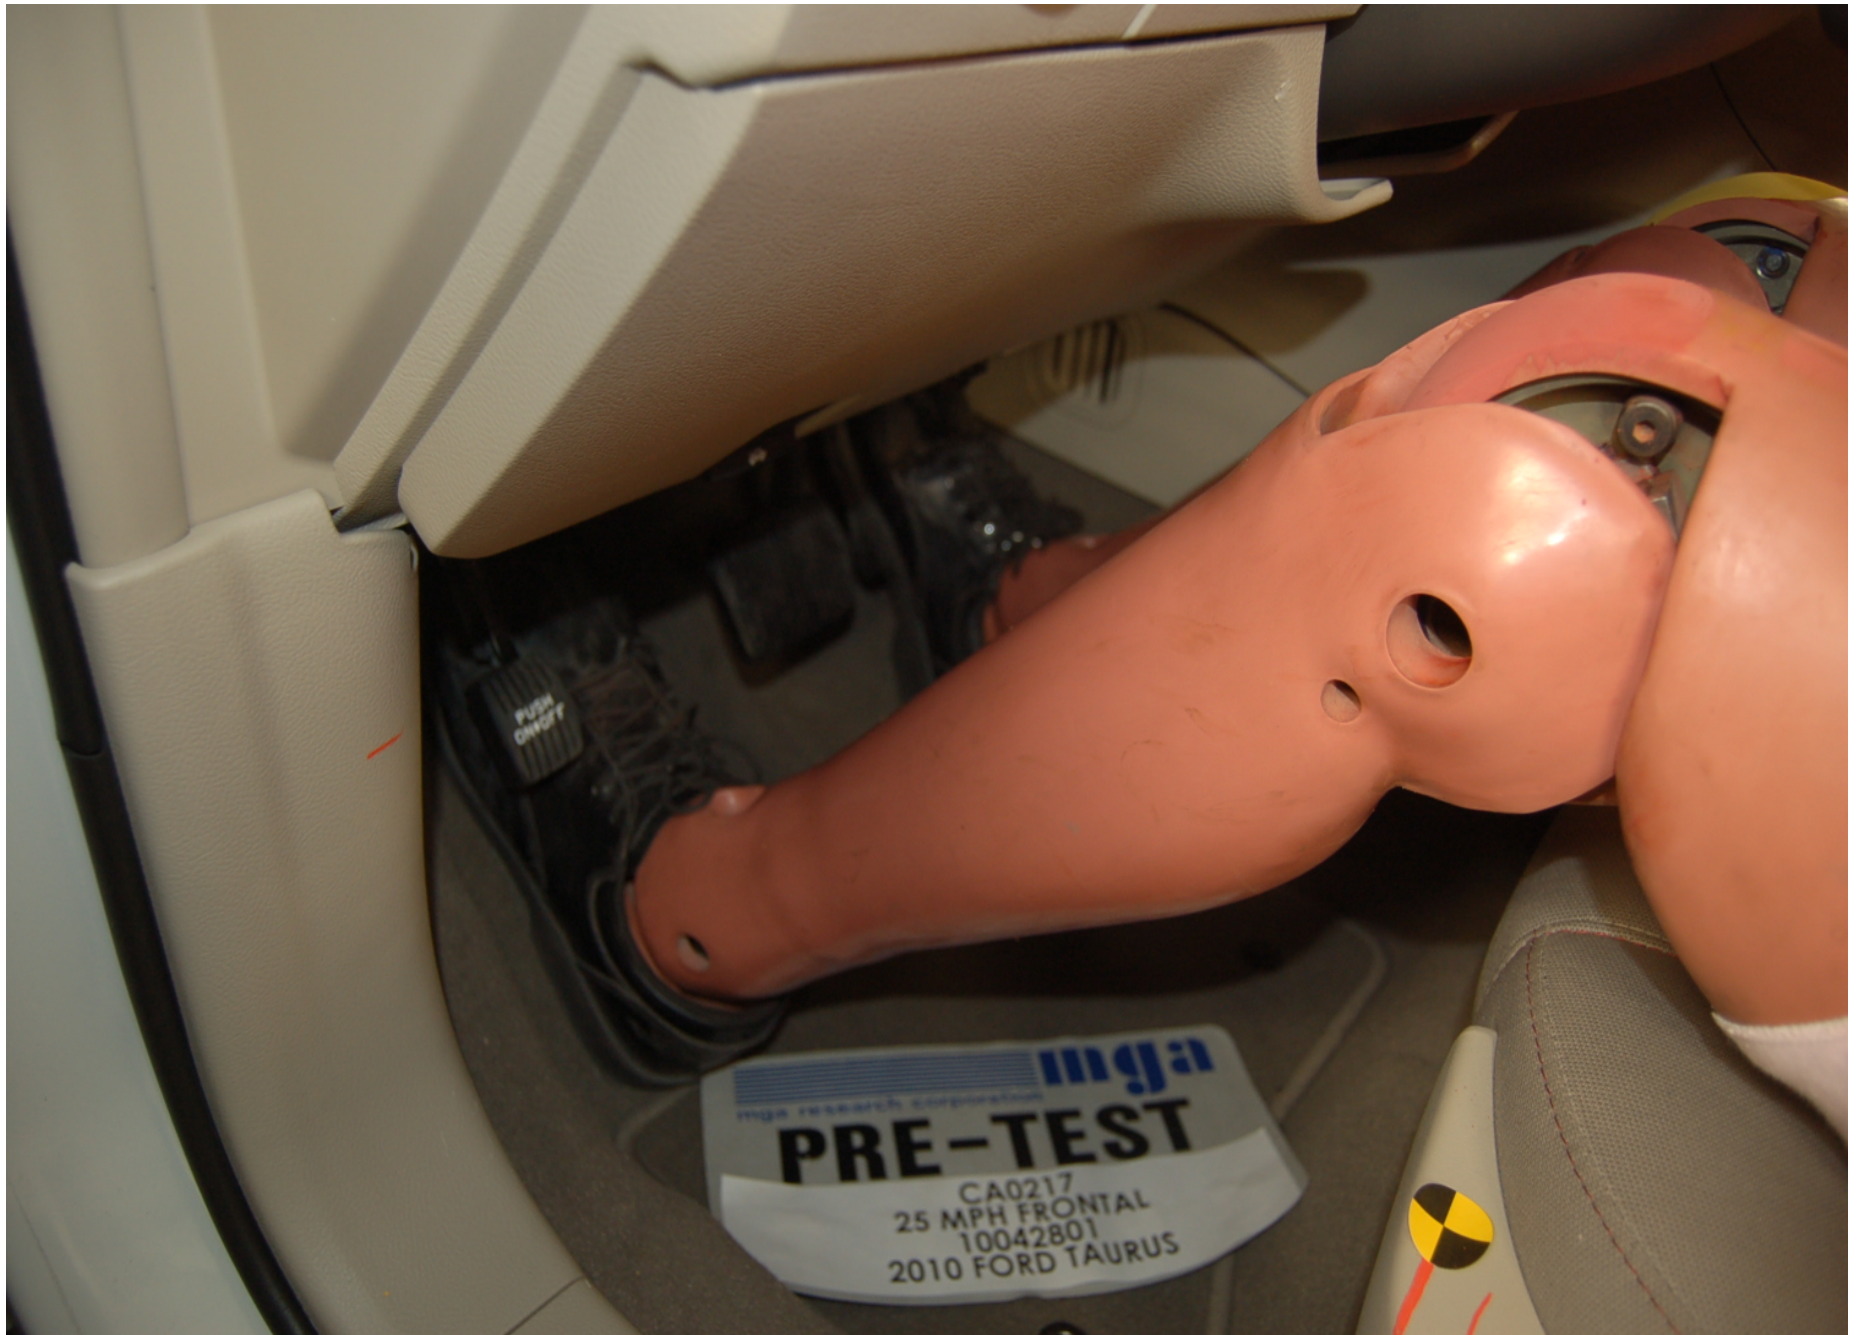

Pre-Test Driver Dummy Feet Position



Post-Test Driver Dummy Feet Position



Pre-Test Driver Side Knee Bolster View



Post-Test Driver Side Knee Bolster View


B-45



Post-Test Driver Dummy Airbag Contact



Post-Test Driver Dummy Head Contact (visor)

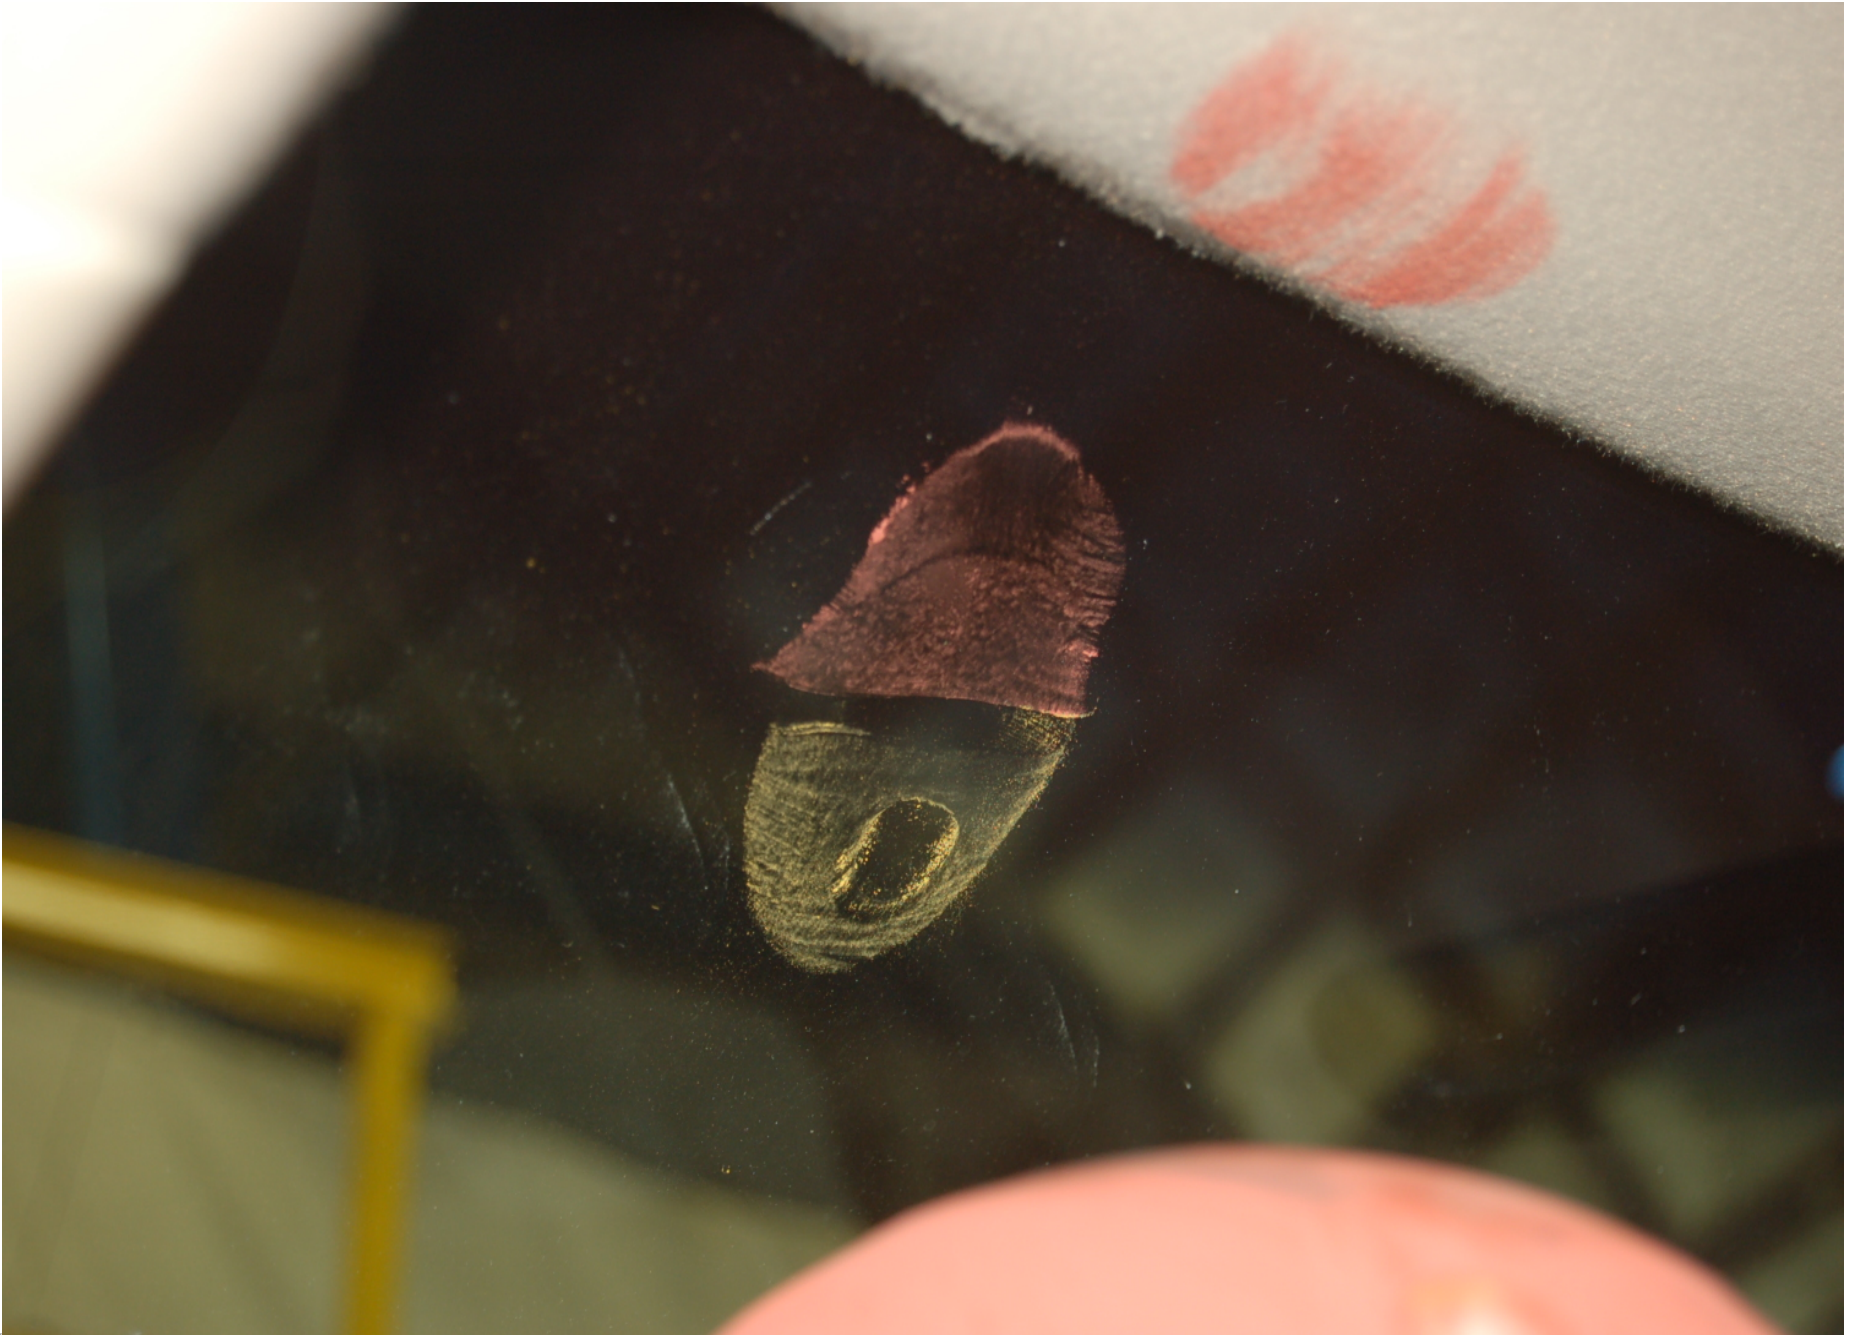

Post-Test Driver Dummy Head Contact (windshield)

B-48



Post-Test Driver Dummy Head Contact (rearview mirror)



Post-Test Driver Dummy Knee Contact



Pre-Test Passenger Dummy Front View (head position)

B-51



Post-Test Passenger Dummy Front View (head position)



Pre-Test Passenger Dummy Position Right Side View




Post-Test Passenger Dummy Position Right Side View



Pre-Test Passenger Dummy Position Right Side View (door open)



Post-Test Passenger Dummy Position Right Side View (door open)

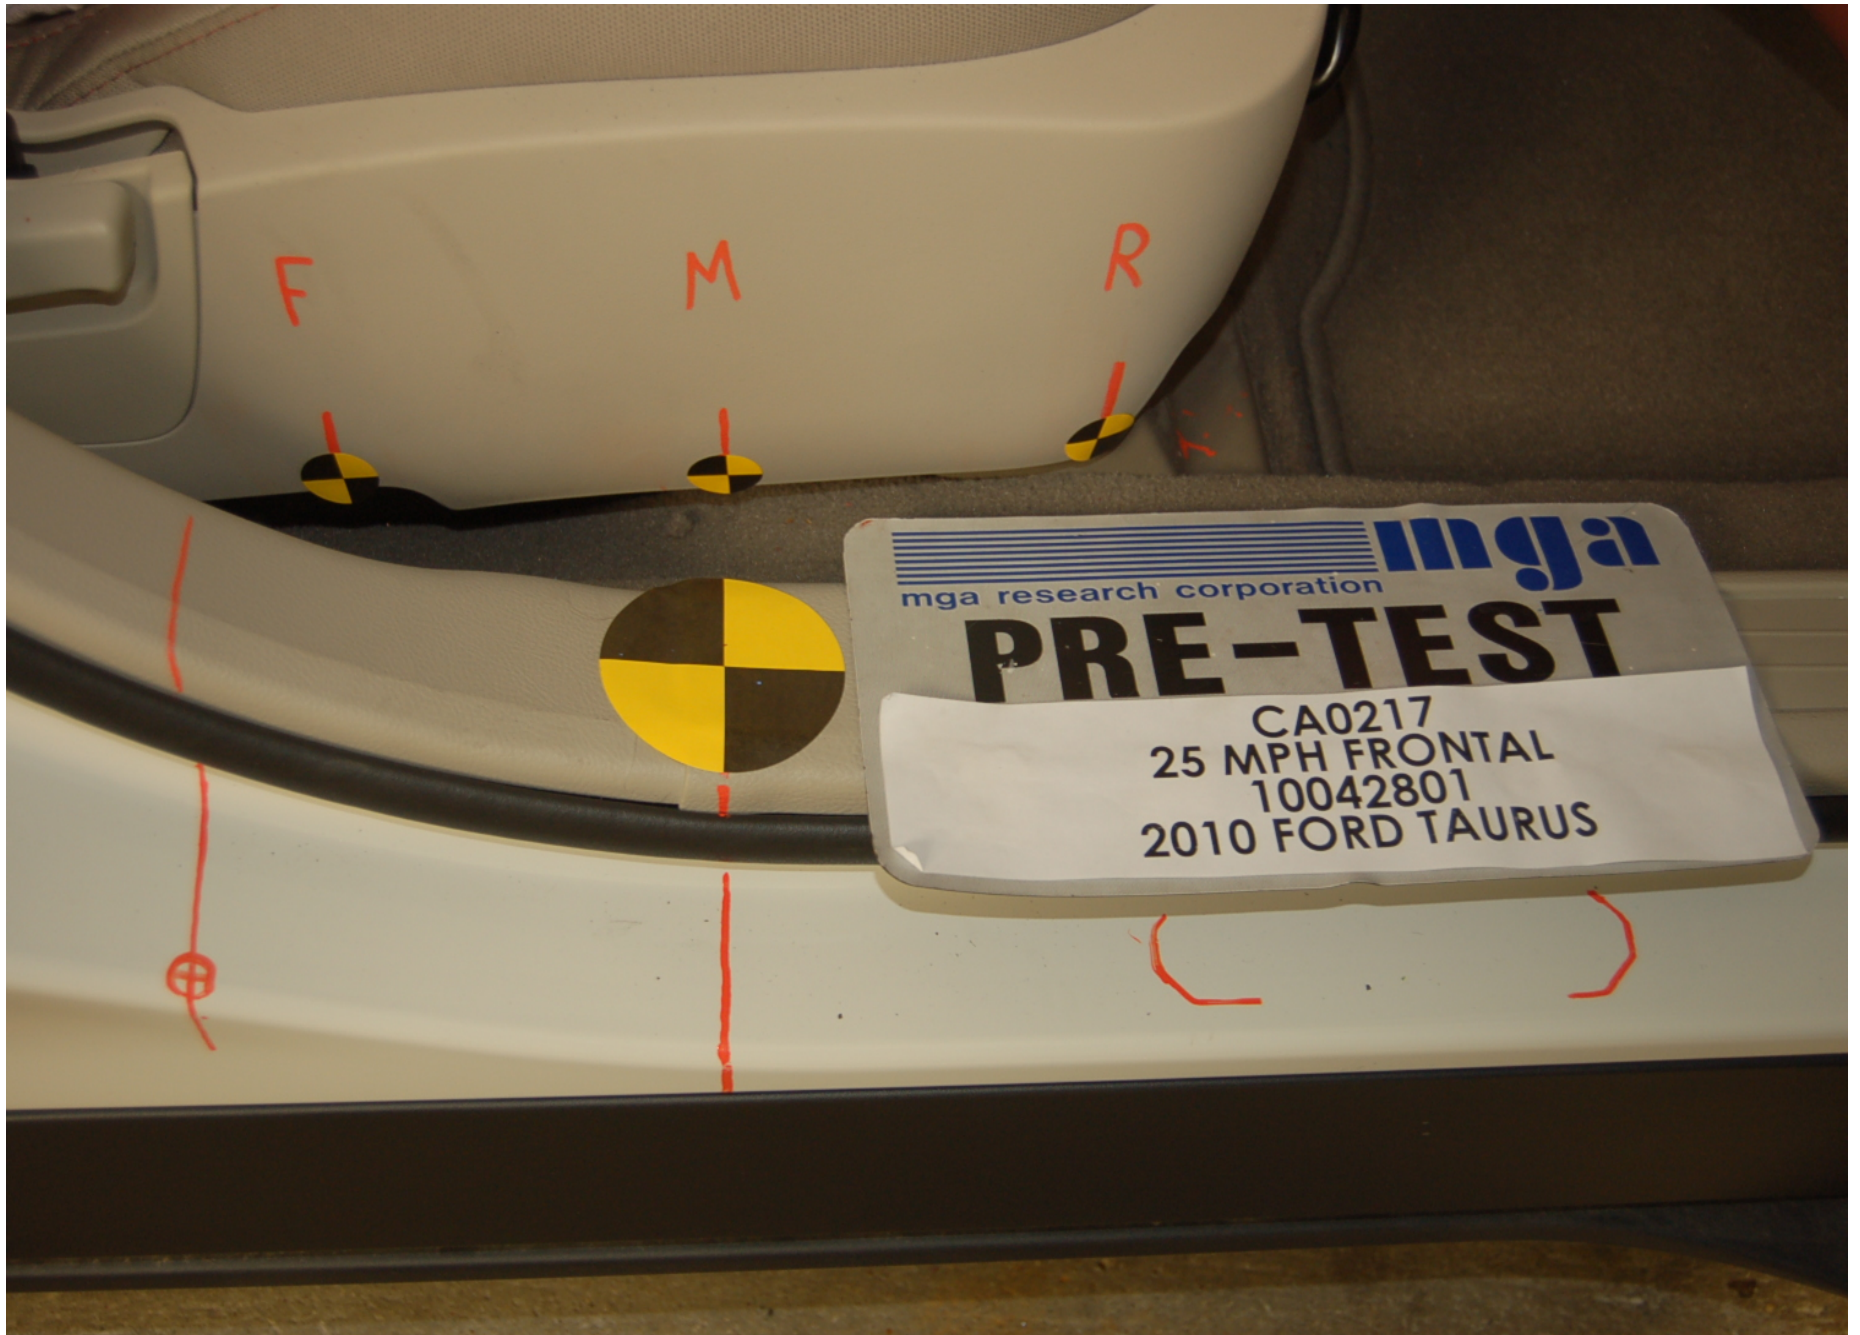

Pre-Test Passenger Dummy Seat Position



Post-Test Passenger Dummy Seat Position



Pre-Test Passenger Dummy Feet Position



Post-Test Passenger Dummy Feet Position

B-60



Pre-Test Passenger Side Knee Bolster View

B-61



Post-Test Passenger Side Knee Bolster View

B-62



Post-Test Passenger Dummy Airbag Contact

B-63



Post-Test Passenger Dummy Head Contact (visor)

B-64



Post-Test Passenger Dummy Head Contact (B-pillar)

B-65



Post-Test Passenger Dummy Knee Contact




Rollover 90 Degrees



Rollover 180 Degrees


B-68

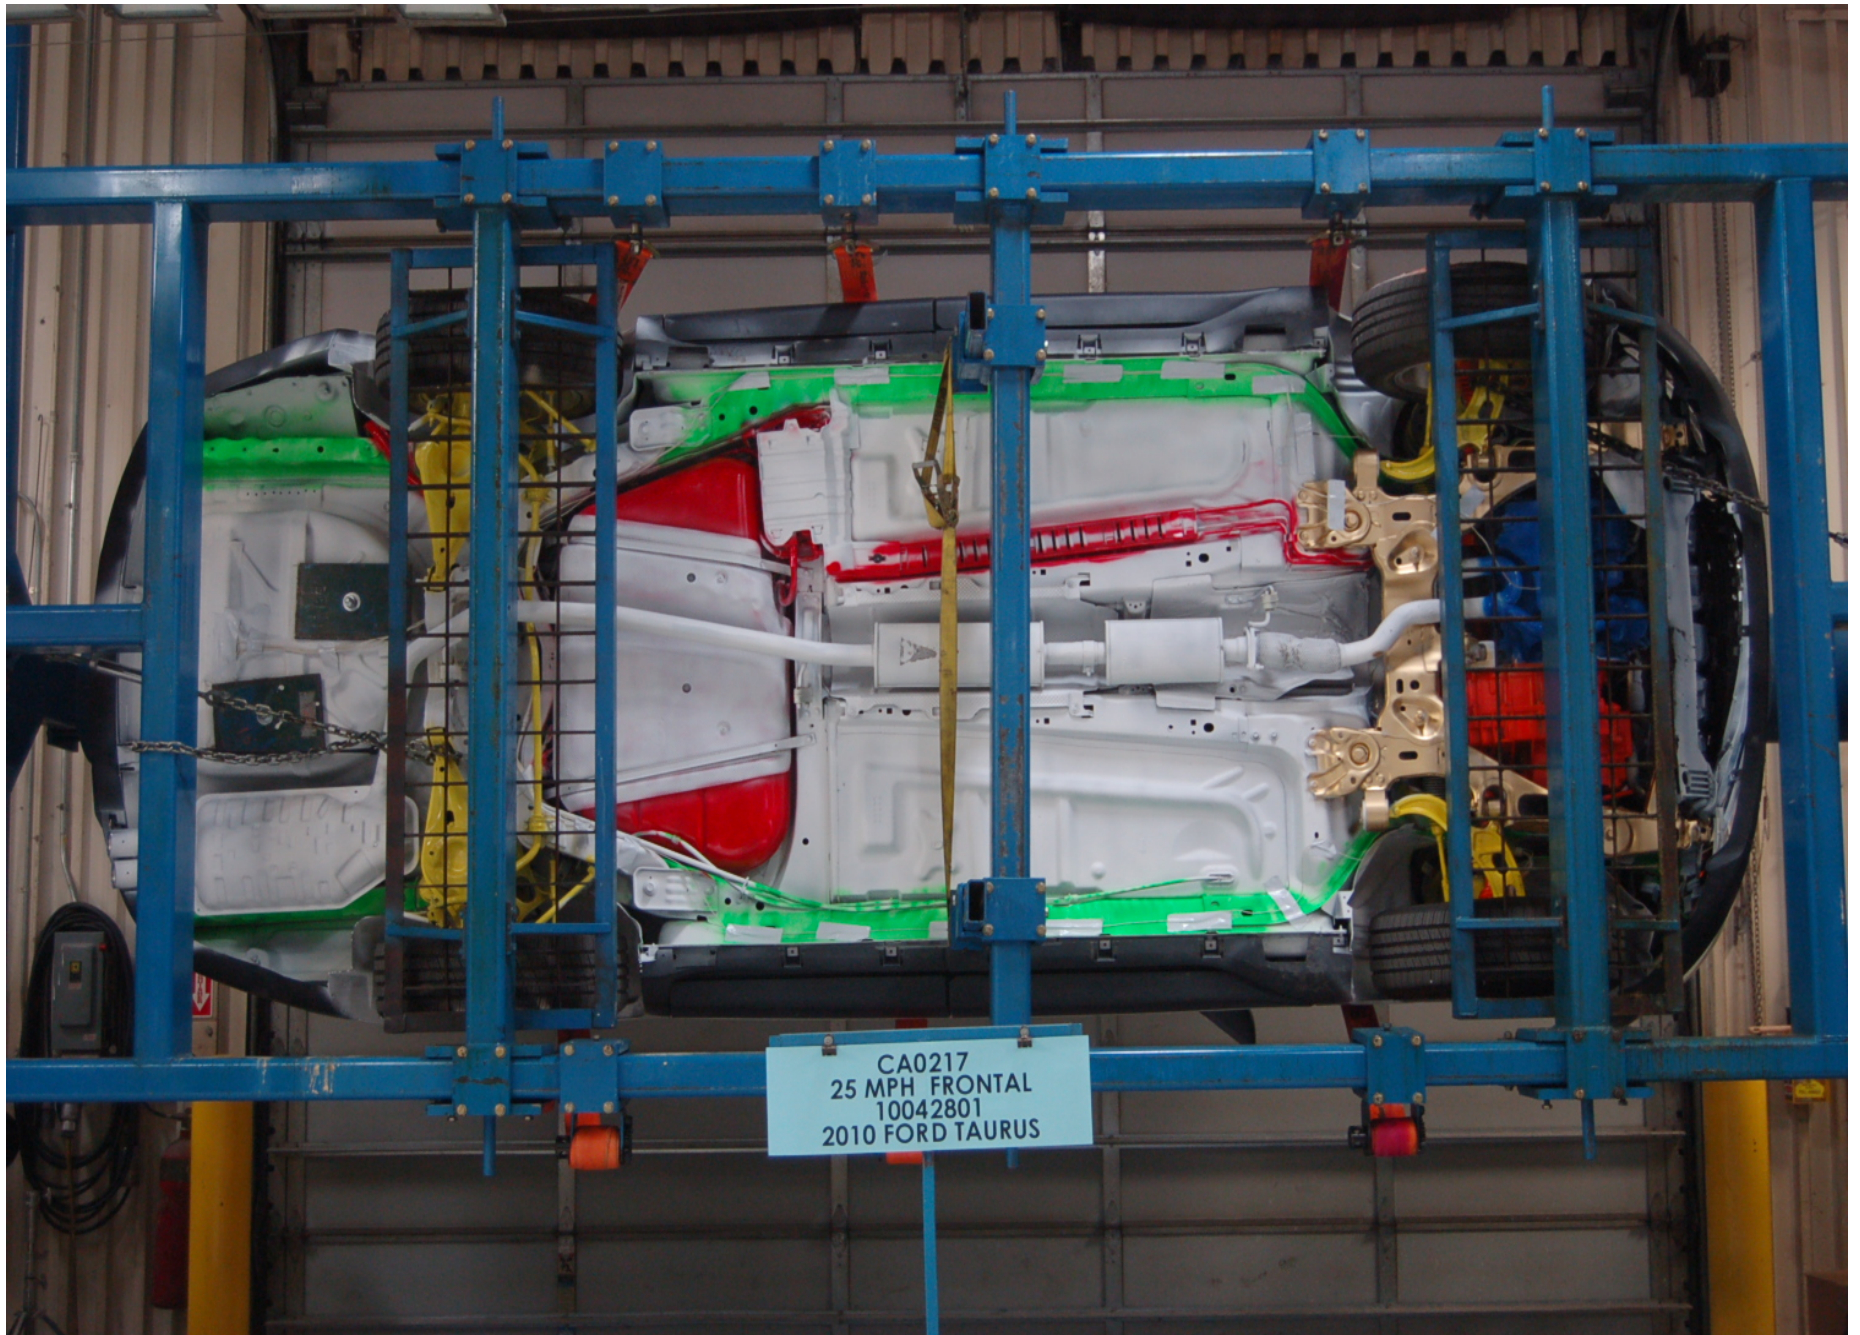

Rollover 270 Degrees



Rollover 360 Degrees

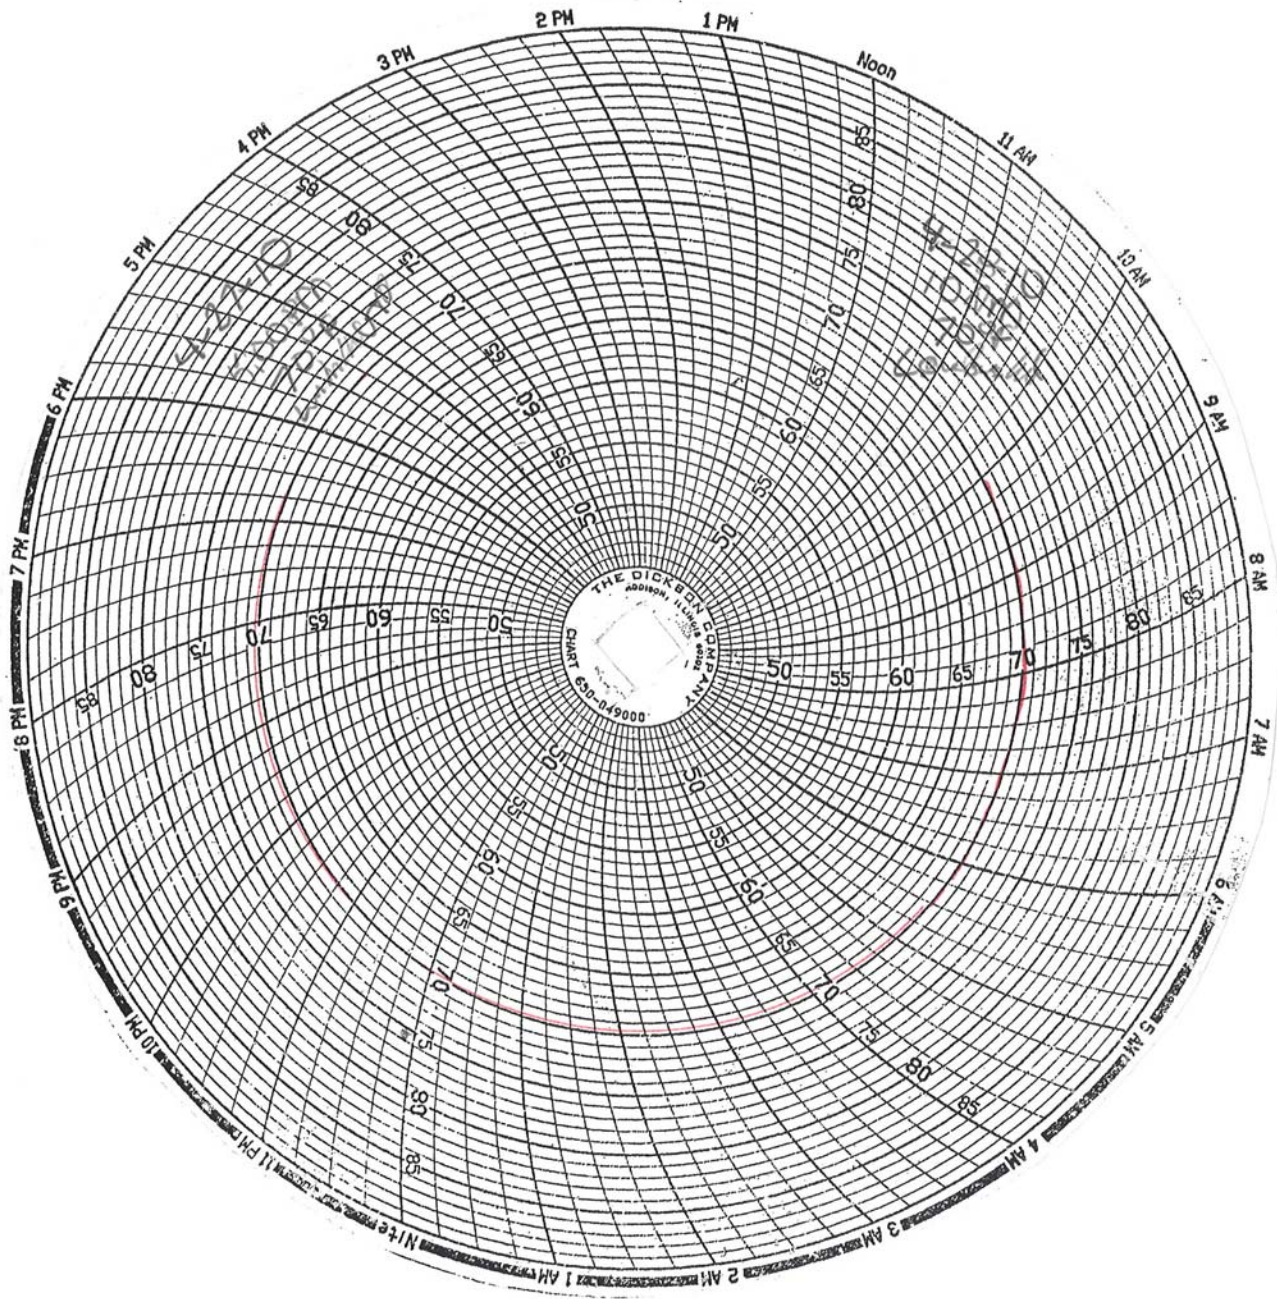

Temperature Plot

## APPENDIX C

### INSTRUMENTATION CALIBRATION

#### INSTRUMENTS FOR DRIVER DUMMY NO.: 401

	SERIAL NO.	MANUFACTURER	CALIBRATION DATE
Head X	AGH90	Endevco	02/26/10
Head Y	AH467	Endevco	02/26/10
Head Z	AH5P1	Endevco	02/26/10
Neck Load Cell	2146	Denton	03/04/10
Chest X	AH5D9	Endevco	02/26/10
Chest Y	AH5L1	Endevco	02/26/10
Chest Z	AH5N9	Endevco	02/26/10
Chest Displacement	401	Servo	03/08/10
Left Femur Load Cell	979	Denton	04/16/10
Right Femur Load Cell	186	GSE	04/16/10

#### INSTRUMENTS FOR PASSENGER DUMMY NO.: 403

	SERIAL NO.	MANUFACTURER	CALIBRATION DATE
Head X	AGH55	Endevco	02/26/10
Head Y	AGH79	Endevco	02/26/10
Head Z	AGH89	Endevco	02/26/10
Neck Load Cell	1145	Denton	11/04/09
Chest X	AGH74	Endevco	02/12/10
Chest Y	C10686	Endevco	02/12/10
Chest Z	C13046	Endevco	02/12/10
Chest Displacement	403	Servo	03/08/10
Left Femur Load Cell	84	Denton	11/13/09
Right Femur Load Cell	83	Denton	11/13/09

## VEHICLE INSTRUMENTS

	SERIAL NO.	MANUFACTURER	CALIBRATION DATE
Left Rear Seat Crossmember X	P45287	Endevco	01/20/10
Right Rear Seat Crossmember X	P47900	Endevco	12/30/09
Top of Engine X	A05-A09	Entran	01/20/10
Bottom of Engine X	D12-X25	Entran	12/30/09
Left Brake Caliper X	P47853	Endevco	03/17/10
Right Brake Caliper X	P47090	Endevco	01/20/10
Instrument Panel X	D12-X08	Entran	04/13/10
Trunk Z	G29-X39	Entran	04/13/10