

REPORT NUMBER: SPNCAP-KAR-12-042

**NEW CAR ASSESSMENT PROGRAM (NCAP)
SIDE IMPACT POLE TEST**

**NISSAN MOTOR CO., LTD.
2012 NISSAN VERSA 1.6 SV 4-DOOR SEDAN**

NHTSA No: MC5201

**PREPARED BY:
KARCO ENGINEERING, LLC.
9270 HOLLY ROAD
ADELANTO, CA 92301**



FEBRUARY 6, 2012

FINAL REPORT

**PREPARED FOR:
U.S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
OFFICE OF CRASHWORTHINESS STANDARDS
MAIL CODE: NVS-111
1200 NEW JERSEY AVE, SE, ROOM W43-410
WASHINGTON, D.C. 20590**

TECHNICAL REPORT DOCUMENTATION PAGE

1. Report No. SPNCAP-KAR-12-042	2. Government Accession No.	3. Recipient's Catalog No.																												
4. Title and Subtitle Final Report of New Car Assessment Program Side Impact Pole Testing of a 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5201		5. Report Date February 6, 2012																												
		6. Performing Organization Code KAR																												
7. Authors Mr. Steven D. Matsusaka, Project Engineer, KARCO Mr. Frank Richardson, Program Manager, KARCO		8. Performing Organization Report No. TR-P31007-01-NC																												
9. Performing Organization Name and Address KARCO Engineering, LLC. 9270 Holly Rd. Adelanto, CA 92301		10. Work Unit No.																												
		11. Contract or Grant No. DTNH22-09-D-00122																												
12. Sponsoring Agency Name and Address U. S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards (NVS-111) 1200 New Jersey Ave., SE, Room W43-410 Washington, D.C. 20590		13. Type of Report and Period Covered Final Test Report, Jan. 23 - Feb. 6, 2012																												
		14. Sponsoring Agency Code NVS-111																												
15. Supplementary Notes																														
16. Abstract A 32.2 km/h (20 mph) 75 deg. oblique impact Side NCAP Test was conducted on the subject 2012 Nissan Versa 1.6 SV 4-door sedan in accordance with the specifications of the Office of Crash Worthiness Standards Side NCAP Pole Laboratory Test Procedure for the generation of consumer information on vehicle side pole crash protection. The test was conducted at the KARCO Engineering, LLC. facility in Adelanto, California on January 23, 2012. The impact velocity was 32.0 km/h and the outside ambient temperature at the struck (driver's) side of the vehicle was 7.2 deg. C. The target vehicle's maximum post-test static crush was 427 mm located at level 3. The test vehicle's occupant performance data is as follows: <table border="1"> <thead> <tr> <th rowspan="2">Measurement Description</th> <th colspan="3">Driver ATD (ES-2re)</th> </tr> <tr> <th>Units</th> <th>Threshold</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC₃₆)</td> <td></td> <td>1000</td> <td>175.3</td> </tr> <tr> <td>Resultant Lower Spine Acceleration</td> <td>g</td> <td>82</td> <td>35.1</td> </tr> <tr> <td>Total Pelvic Force (Sum of Acetabular and Iliac Forces)</td> <td>N</td> <td>5525</td> <td>3490</td> </tr> <tr> <td>Maximum Thoracic Rib Deflection</td> <td>mm</td> <td>38</td> <td>24</td> </tr> <tr> <td>Maximum Abdominal Rib Deflection</td> <td>mm</td> <td>45</td> <td>18</td> </tr> </tbody> </table> The two doors on the struck side of the vehicle did not separate from the body at the hinges or latches. The opposite doors did not open during the side impact event.				Measurement Description	Driver ATD (ES-2re)			Units	Threshold	Result	Head Injury Criteria (HIC ₃₆)		1000	175.3	Resultant Lower Spine Acceleration	g	82	35.1	Total Pelvic Force (Sum of Acetabular and Iliac Forces)	N	5525	3490	Maximum Thoracic Rib Deflection	mm	38	24	Maximum Abdominal Rib Deflection	mm	45	18
Measurement Description	Driver ATD (ES-2re)																													
	Units	Threshold	Result																											
Head Injury Criteria (HIC ₃₆)		1000	175.3																											
Resultant Lower Spine Acceleration	g	82	35.1																											
Total Pelvic Force (Sum of Acetabular and Iliac Forces)	N	5525	3490																											
Maximum Thoracic Rib Deflection	mm	38	24																											
Maximum Abdominal Rib Deflection	mm	45	18																											
17. Key Words New Car Assessment Program (NCAP) Side Impact Pole Part 572V SID-IIs		18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Admin. Technical Reference Division 1200 New Jersey Ave., SE Room W43-410 Washington, DC 20590																												
19. Security Classification of this report UNCLASSIFIED	20. Security Classification of this page UNCLASSIFIED	21. No. of Pages 101	22. Price																											

TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
1	Test Purpose and Procedure	1
2	Summary of Test Results	2
3	Occupant and Vehicle Information	4
<u>Data Sheet</u>		<u>Page</u>
1	General Test and Vehicle Parameter Data	5
2	Seat, Seat Belt, Steering Wheel Adjustment and Fuel System Data	9
3	Dummy Longitudinal Clearance Dimensions	13
4	Dummy Lateral Clearance Dimensions	14
5	Camera and Instrumentation Data	15
6	Test Vehicle Accelerometer Locations	16
7	Rigid Pole Load Cell Data	17
8	Post-Test Observations	18
9	Test Vehicle Profile Measurements	20
10	Test Vehicle Exterior Crush Measurements	21
11	FMVSS No. 301 Static Rollover Results	24
12	Dummy/Vehicle Temperature and Humidity Stabilization	25
<u>Appendix</u>		<u>Page</u>
A	Photographs	A
B	Vehicle and Dummy Response Data Plots	B
C	Dummy Configuration and Performance Verification Data	C
D	Test Equipment and Instrumentation Calibration Data	D

SECTION 1

TEST PURPOSE AND PROCEDURE

This side impact test is part of the MY 2012 New Car Assessment Program Side Impact Test Program, sponsored by the National Highway Traffic Safety Administration (NHTSA), under contract number DTNH22-09-D-00122. The purpose of this test is to generate comparative side impact performance in a 2012 Nissan Versa 1.6 SV 4-door sedan. The side impact test was conducted in accordance with the Office of Crashworthiness Standard's Laboratory Test Procedure dated August 2011.

SECTION 2

SUMMARY OF TEST RESULTS

A rigid pole side impact test was conducted on a 2012 Nissan Versa 1.6 SV 4-door sedan. The subject vehicle was towed into the rigid pole at an angle of 74.5° and a velocity of 32.0 km/h. The test was conducted by KARCO Engineering, LLC. in Adelanto, California on January 23, 2012. Pre- and post-test photographs of the test vehicle and side impact dummy (SID-IIs) are included in Appendix A of this report.

One Part 572V (SID-IIs) dummy was placed in the driver designated seating position according to instructions specified in the OCWS Side NCAP Pole Laboratory Test Procedure, dated August 2011. Camera locations and other pertinent camera information are included in this report.

The Part 572V (SID-IIs) was instrumented accordingly:

- Head CG tri-axial accelerometers
- Thorax upper, middle and lower rib displacement potentiometers
- Abdomen upper and lower rib displacement potentiometers
- Lower spine (12) tri-axial accelerometers
- Iliac load cell
- Acetabulum load cell

Appendix B contains the vehicle and dummy response data. Dummy configuration and performance verification data can be found in Appendix C of this report.

Injury readings for the SID-IIs dummy were recorded as follows:

Measurement Description	Units	Passenger ATD (SID-IIs)	
		IARV	Result
Head Injury Criteria (HIC ₃₆)		1000	175.3
Lower Spine (T12) Resultant Acceleration	g	82	35
Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	3490
Maximum Thoracic Rib Deflection	mm	38*	24
Maximum Abdominal Rib Deflection	mm	45*	18

*Proposed IARV

Supplemental restraint information is given below:

Restraint Type	Left Front (Driver) Occupant Location 1		Left Rear (Passenger) Occupant Location 4	
	Mounted	Deployed	Mounted	Deployed
Frontal Airbag	Yes	No	No	
Knee Airbag	No		No	
Side Airbag 1 (Curtain)	Yes	Yes	Yes	Yes
Side Airbag 2 (Torso/Pelvis)	Yes	Yes	No	
Seat Belt Pretensioner	Yes	Yes	No	
Seat Belt Load Limiter	Yes	Yes	No	
Other				

GENERAL COMMENTS

Both the front and rear doors on the struck side of the vehicle remained closed and latched. There was no separation at the hinges or latches. Both doors on the non-struck side remained closed and latched. The outer roof skin separated from the driver's side roof rail. There were no ATD values that exceeded limits.

SECTION 3

OCCUPANT AND VEHICLE INFORMATION/DATA SHEETS

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5201
Test Program: NCAP Side Pole Impact Test Test Date: 01/23/12

CONVERSION FACTORS

Quantity	Typical Application	Std Units	Metric Unit	Multiply By
Mass	Vehicle Weight	lb	kg	0.4536
Linear Velocity	Impact Velocity	miles/hr	km/hr	1.609344
Length or Distance	Measurements	in	mm	25.4
Volume	Fuel Systems	gal	liter	3.785
Volume	Small Fluids	oz	mL	29.574
Pressure	Tire Pressures	lbf/in ²	kPa	6.895
Temperature	General Use	°F	°C	$=(T_f - 32)/1.8$
Force	Dynamic Forces	lbf	N	4.448
Moment	Torque	lbf-ft	N•m	1.355

DATA SHEET NO. 1

GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5201
 Test Program: NCAP Side Pole Impact Test Test Date: 01/23/12

TEST VEHICLE INFORMATION AND OPTIONS

NHTSA Number	MC5201
Model Year	2012
Make	Nissan
Model	Versa 1.6 SV
Body Style	4-Door Sedan
VIN	3N1CN7AP8CL820758
Body Color	Magnetic Gray
Odometer Reading (km / mi)	142 / 88
Engine Displacement (L)	1.6
Type / No. of Cylinders	Inline 4
Engine Placement	Transverse
Transmission Type	Automatic
Transmission Speeds	5
Overdrive	Yes
Final Drive	Front
Roof Rack	No
Sunroof / T-Top	No
Running Boards	No
Tilt Steering Wheel	Yes
Power Seats	No
Anti-Lock Brakes (ABS)	Yes
All Wheel Drive (AWD)	No

Traction Control System (TCS)	Yes
Auto-Leveling System	No
Automatic Door Locks	Yes
Power Window Auto-Reverse	Yes
Other Optional Feature	None
Driver Front Airbag	Yes
Driver Curtain Airbag	Yes
Driver Head/Torso Airbag	No
Driver Torso Airbag	No
Driver Torso/Pelvis Airbag	Yes
Driver Pelvis Airbag	No
Driver Knee Airbag	No
Rear Pass. Curtain Airbag	Yes
Rear Pass. Head/Torso Airbag	No
Rear Pass. Torso Airbag	No
Rear Pass. Torso/Pelvis Airbag	No
Rear Pass. Pelvis Airbag	No
Driver Seat Belt Pretensioner	Yes
Rear Pass. Seat Belt Pretensioner	No
Driver Load Limiter	Yes
Rear Pass. Load Limiter	No
Other Safety Restraint	None

Does Owner's Manual provide instructions to turn off automatic door locks?

No

DATA FROM CERTIFICATION LABEL

Manufactured By	Nissan Motor Co., Ltd.
Date of Manufacture	Aug-11
Vehicle Type	Passenger Car

GVWR (kg)	1552
GAWR Front (kg)	794
GAWR Rear (kg)	758

VEHICLE SEATING AND CAPACITY WEIGHT INFORMATION

Measured Parameter	Front	Rear	Third	Total	
Designated Seating Capacity	2	3		5	A
Capacity Weight (VCW) (kg)				385.0	B
DSC x 68.04 (kg)				340.2	B
Cargo Weight (RCLW) (kg)				44.8	A-B


VEHICLE SEAT TYPE

Seating Location	Type of Seat Pan				Type of Seat Back		
	Bucket	Bench	Split Bench	Contoured	Fixed	Adjustable	
						w/ Lever	w/ Knob
Front Seat	Yes					Yes	
Rear or Second Row Seat		Yes			Yes		
Third Row Seat							

DATA SHEET NO. 1 ... (CONTINUED)

GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5201
 Test Program: NCAP Side Pole Impact Test Test Date: 01/23/12

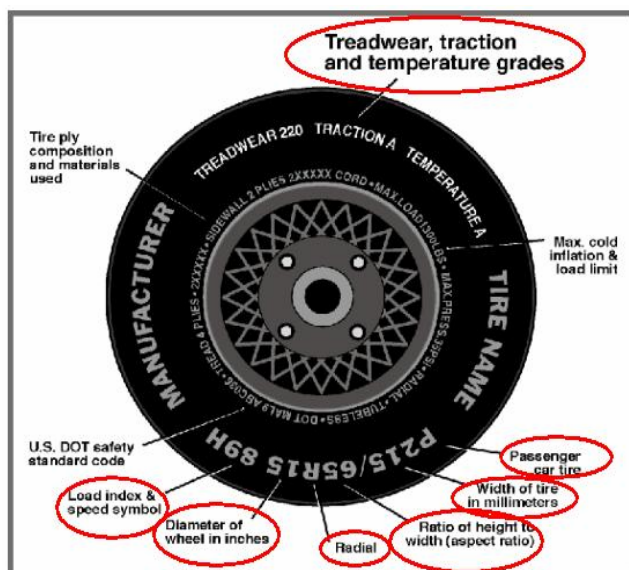

TIRE PLACARD INFORMATION

Measured Parameter	Front	Rear
Recommended Cold Tire Pressure (kPa)	230	230
Recommended Tire Size	P185/65R15	P185/65R15

VEHICLE TIRE INFORMATION

Measured Parameter	Front	Rear
Max. Tire Pressure (kpa)	300	300
Tire Size on Vehicle	P185/65R15	P185/65R15
Tire Manufacturer	Continental	Continental
Tire Name	ConitPro Contact	ContiPro Contact
Tire Type	Passenger	Passenger
Tire Width	185	185
Aspect Ratio	65	65
Radial	Yes	Yes
Wheel Diameter	15	15
Load Index/Speed Symbol	86H	86H
Treadware	400	400
Traction Grade	AA	AA
Temperature Grade	A	A
Tire Material	Polyester, Steel, Nylon	Polyester, Steel, Nylon

DATA SHEET NO. 1 ... (CONTINUED)

GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5201
 Test Program: NCAP Side Pole Impact Test Test Date: 01/23/12

TIRE PRESSURES

	Units	LF	RF	LR	RR
As Delivered	kPa	205	205	205	205
Tire Placard	kPa	230	230	230	230
Owner's Manual	kPa	230	230	230	230
As Tested	kPa	230	230	230	230

TEST VEHICLE AXLE WEIGHTS

	Units	As Delivered (UVW)			As Tested (ATW)			Fully Loaded		
		Front	Rear	Total	Front	Rear	Total	Front	Rear	Total
Left	kg	342.5	218.5		365.5	261.0		361.0	270.0	
Right	kg	310.5	233.5		313.5	251.0		310.5	257.0	
Ratio	%	59.1%	40.9%	100.0%	57.0%	43.0%	100.0%	56.0%	44.0%	100.0%
Total	kg	653.0	452.0	1105.0	679.0	512.0	1191.0	671.5	527.0	1198.5

TARGET TEST WEIGHT CALCULATION

Measured Parameter	Units	Value	
Total Delivered Weight (UVW)	kg	1105.0	A
Actual Weight of 1 P572 O ATD Used	kg	49.0	B
Rated Cargo/Luggage Wt (RCLW)	kg	44.8	C
Calculated Vehicle Target Wt (TVTW)	kg	1198.8	A+B+C

Does the measured As Tested Vehicle Weight lie within the required weight range (i.e.

Calculated Test Vehicle Target Weight -4.5 kg to -9.0 kg)? ☒ Yes ☐ No

WEIGHT OF BALLAST AND VEHICLE COMPONENTS REMOVED TO MEET TVTW

Component Description	Weight (kg)
Spare Tire and Tools	14.0
Non-struck Side Windows and Door Panels	10.5
Non-struck Side Outboard Mirror	1.0
Speakers	1.0
Trunk Soft Trim	2.0
Rear Bumper Cover	4.0
Hub Caps	1.0
Tail Lights	3.0
Ballast / Equipment Added	80.5

DATA SHEET NO. 1 ... (CONTINUED)**GENERAL TEST AND VEHICLE PARAMETER DATA**Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5201Test Program: NCAP Side Pole Impact Test Test Date: 01/23/12**TEST VEHICLE ATTITUDE AND CG**

Measurement Description	Units	As Delivered	As Tested	Fully Loaded	Meets Requirement***
Driver Door Sill Angle (front-to-rear)*	°	-0.7	-0.5	-0.3	Yes
Front Passenger Sill Angle (front-to-rear)*	°	-0.9	-0.4	-0.3	Yes
Front Bumper-Line Angle (left-to-right)**	°	-0.2	-0.2	-0.2	Yes
Rear Bumper-Line Angle (left-to-right)**	°	-0.3	-0.1	-0.1	Yes
Vehicle CG (Aft of Front Axle)	mm	1064	1119	1144	
Vehicle CG (Left (+)/Right (-) from Longitudinal Centerline)	mm	11	38	39	

*ND=Nose Down (-), NU=Nose Up (+)

**LD=Left Down (-), LU=Left Up (+)

***The "As Tested" vehicle attitude angle measurements must be within "As Delivered" and the "Fully Loaded" vehicle attitude measurements at each location. Indicate "Yes" or "No" for "Meets Requirement"

DATA SHEET NO. 2**SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA**Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5201Test Program: NCAP Side Pole Impact Test Test Date: 01/23/12**SEAT POSITIONING**

The driver's seat is set to the forward most position where the ATD will not contact any interior panels at the mid-height and mid-angle position. The front center seat (if applicable) and right front passenger's seat should be set in a similar manner as the driver's seat. The struck side rear passenger's seat, rear center seat, and non-struck side rear passenger's seats should be set to the rearmost, lowest, mid-angle position.

SCRL ANGLE RANGE

Seat	SCRL (°)		
	Max	Min	Mid
Driver Seat	2.3	0.0	1.1
Front Passenger Seat	Fixed	Fixed	Fixed
Front Center Seat	Fixed	Fixed	Fixed
Struck Side Rear Seat	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Fixed
Rear Center Seat	Fixed	Fixed	Fixed

SEAT HEIGHT AND ANGLE

Seat	As Tested SCRL Angle	As Tested SCRP Height	SCRP Height Position	SCRP Height (mm)		
				Rearmost	Mid Fore/Aft	Forwardmost
Driver Seat	1.1	564	Max	539	551	564
			Mid	539	551	564
			Min	539	551	564
Front Passenger Seat	Fixed	562	Max	536	549	562
			Mid	536	549	562
			Min	536	549	562
Front Center Seat			Max			
			Mid			
			Min			
Struck Side Rear Seat	Fixed	Fixed	Max	Fixed	Fixed	Fixed
			Mid	Fixed	Fixed	Fixed
			Min	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Max	Fixed	Fixed	Fixed
			Mid	Fixed	Fixed	Fixed
			Min	Fixed	Fixed	Fixed
Rear Center Seat	Fixed	Fixed	Max	Fixed	Fixed	Fixed
			Mid	Fixed	Fixed	Fixed
			Min	Fixed	Fixed	Fixed

DATA SHEET NO. 2 ... (CONTINUED)

SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA


Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5201
 Test Program: NCAP Side Pole Impact Test Test Date: 01/23/12

SEAT FORE/AFT POSITION

Seat	Total Fore/Aft Travel		Test Position From Forwardmost Position	
	mm	Detents*	mm	Detent*
Driver Seat	240	25	0	0
Front Passenger Seat	240	25	0	0
Front Center Seat				
Struck Side Rear Seat	Fixed	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Fixed	Fixed
Rear Center Seat	Fixed	Fixed	Fixed	Fixed

SEAT BACK ADJUSTMENT

The driver's seat back is positioned such that the dummy's head is level. The right front passenger seat back is set to the same angle as the driver's seat.

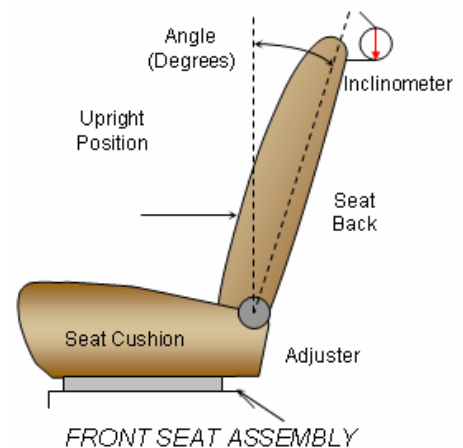

Seat	Total Seat Back Angle Range		Test Position from Most Upright	
	Degrees	Detents*	Degree	Detent*
Driver Seat w/Seated Dummy	60.2	31	8.4	3
Front Passenger Seat	59.5	31	8.4	3
Front Center Seat				
Struck Side Rear Seat w/Seated Dummy	Fixed	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Fixed	Fixed
Rear Center Seat	Fixed	Fixed	Fixed	Fixed

SEAT BELT ANCHORAGE ADJUSTMENT

Seat belt anchorages are adjusted in accordance with the information provided by the manufacturer on Form No. 1. The positions are marked H, M1, ... , L from top to bottom.

	Total No. of Positions	Placed in Position
Driver Seat	4	H

DATA SHEET NO. 2 ... (CONTINUED)**SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA**Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5201Test Program: NCAP Side Pole Impact Test Test Date: 01/23/12**HEAD RESTRAINT ADJUSTMENT**


The driver's head restraint is adjusted to the lowest and most full forward in-use position.

	Total No. of Positions	Placed in Position
Driver Seat	7	Full Down

STEERING COLUMN ADJUSTMENT

Steering wheel and column adjustments are made so that the steering wheel hub is at the center of the geometric locus it describes when it moves through its full range of motion.

	Degrees	Fore-Aft Position (mm)
Lowermost - Position 1	24.0	
Geometric Center - Position 2	26.5	
Uppermost - Position 3	29.0	
Telescoping Steering Wheel Travel		
Test Position	26.5	




DATA SHEET NO. 2 ... (CONTINUED)**SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA**Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5201Test Program: NCAP Side Pole Impact Test Test Date: 01/23/12**FUEL TANK CAPACITY**

Description	Liters
Usable Capacity of "Standard Tank" (see Form No. 1)	40.88
Usable Capacity of "Optional Tank" (see Form No. 1)	
Usable Capacity of "Standard Tank" (see Owner's Manual)	
Usable Capacity of "Optional Tank" (see Owner's Manual)	
93% of Usable Capacity	38.02
Actual amount of Solvent Used in Test	38.02
1/3 of Usable Capacity	13.63

Is the Actual Amount of Solvent Used in the test equal to $93\% \pm 1\%$ of the Usable Capacity stated in the Form No. 1? ☒ **Yes** ☐ **No**

FUEL PUMP


The vehicle is equipped with an electric fuel pump. The fuel pump will pump fuel for 1 second after the ignition is switched to the "ON" position and will continue to operate while the engine is running.

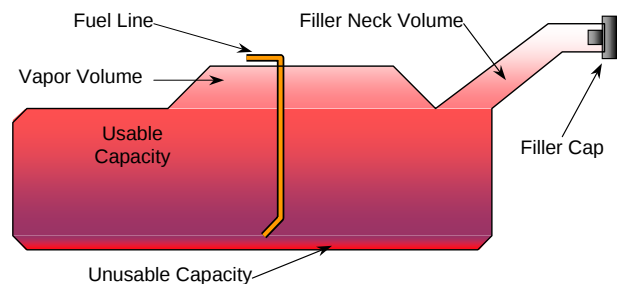**VEHICLE FUEL TANK ASSEMBLY**

DATA SHEET NO. 3

DUMMY LONGITUDINAL CLEARANCE DIMENSIONS

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5201
 Test Program: NCAP Side Pole Impact Test Test Date: 01/23/12

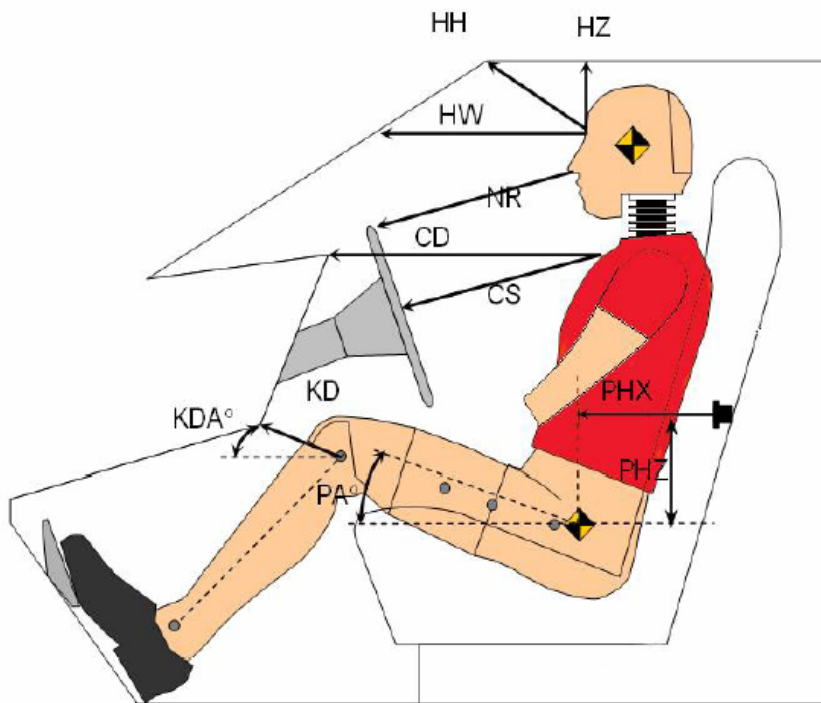


DUMMY LONGITUDINAL CLEARANCE DIMENSION INFORMATION

Driver Code	Description	Driver	
		Length (mm)	Angle (°)
HH	Head to Header	267	
HW	Head to Windshield	578	
HZ	Head to Roof	180	
NR	Nose to Rim	270	
CD	Chest to Dash	425	
CS	Chest to Steering Wheel	175	
KD(L)/KDA(L)°	Left Knee to Dash	105	38.9
KD(R)/KDA(R)°	Right Knee to Dash	100	40.4
PAX°	Pelvic Tilt Angle (x-axis)		19.0
PAY°	Pelvic Tilt Angle (y-axis)		0.4
PHX	Hip Point to Striker (x-axis)	383	
PHZ	Hip Point to Striker (z-axis)	82	

DATA SHEET NO. 4

DUMMY LATERAL CLEARANCE DIMENSIONS

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5201
Test Program: NCAP Side Pole Impact Test Test Date: 01/23/12

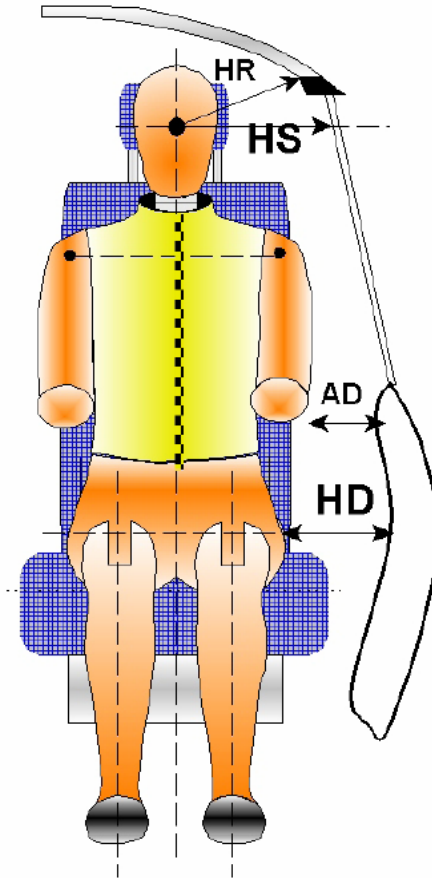


DUMMY LATERAL CLEARANCE DIMENSION INFORMATION

Code	Measurement Description	Units	Driver
HR	Head to Side Header	mm	215
HS	Head to Side Window	mm	319
AD	Arm to Door	mm	122
HD	H-Point to Door	mm	135

DATA SHEET NO. 5

CAMERA AND INSTRUMENTATION DATA

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5201
 Test Program: NCAP Side Pole Impact Test Test Date: 01/23/12

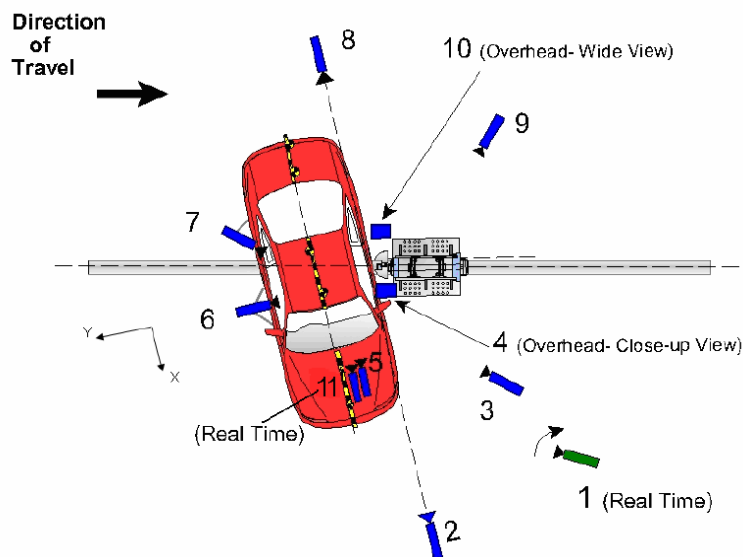

CAMERA LOCATIONS AND DATA

Camera No.	View	Coordinates (m)			Lens (mm)	Film Speed (fps)
		X*	Y*	Z*		
1	Real Time Pan View of Impact	8.89	46.57	-3.04		30
2	Front Ground Level - Impact View	8.34	-0.05	-0.93	24	1000
3	Impact Side 45° - Forward Pole View	4.10	-2.15	-1.15	8.5	1000
4	Overhead Close-Up View of Impact	0.00	0.00	-5.79	12.5	1000
5	On-Board - Dummy Front View	0.92	0.82	-1.33	35	1000
6	On-Board - Dummy Side View	-0.14	1.82	-1.16	14	1000
7	On-Board - Dummy Rear Oblique View	-1.17	1.83	-1.20	20	1000
8	Rear Ground Level - Impact View	-6.12	-6.23	-0.96	24	1000
9	Impact Side 45° - Rearward Pole View	-8.02	0.04	-1.01	35	1000
10	Overhead Wide View of Impact	-0.06	0.22	-5.79	14	1000
11	Real Time Dummy Front View	1.03	0.88	-1.32		30

Reference from Point of Impact for X and Y; from Ground for Z):

+X = Forward of Vehicle, +Y = Right of Vehicle, +Z = Down

*All measurements accurate to ± 6 mm


INSTRUMENTATION

Driver Dummy Channels	16
Vehicle Structure Accelerometers	18
Pole Load Cells	8
Total	42

DATA SHEET NO. 6

TEST VEHICLE ACCELEROMETER LOCATIONS

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5201
 Test Program: NCAP Side Pole Impact Test Test Date: 01/23/12

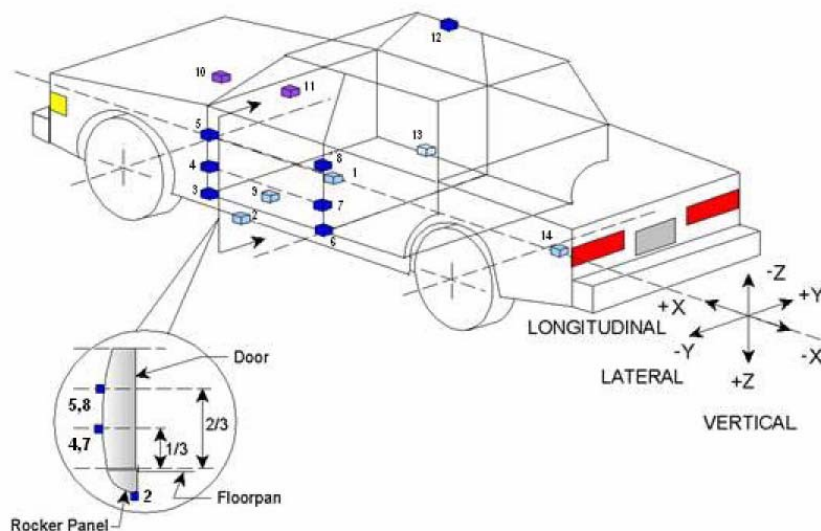

VEHICLE ACCELEROMETER PRE-TEST LOCATIONS


Loc. No.	Sensor Description	Coordinates (mm)		
		X	Y	Z
1	Vehicle CG	1920	0	-300
2	Left Floor Sill	3119	-517	-196
3	A-Pillar Sill	3245	-752	-340
4	A-Pillar Low	3245	-752	-495
5	A-Pillar Mid	3245	-752	-827
6	B-Pillar Sill	2135	-677	-322
7	B-Pillar Low	2135	-677	-530
8	B-Pillar Mid	2135	-677	-765
9	Driver Seat Track	2573	-541	-295
10	Engine Top	3810	341	-785
11	Firewall	3548	345	-880
12	Right Roof	2335	405	-1462
13	Right Floor Sill	1911	655	-295
14	Rear Floorpan	1052	490	-505

Reference: X – Rear surface of vehicle (+ forward)
 Y – Vehicle centerline (+ to right)
 Z – Ground plane (+ down)

DATA SHEET NO. 7

RIGID POLE LOAD CELL DATA

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5201
Test Program: NCAP Side Pole Impact Test Test Date: 01/23/12

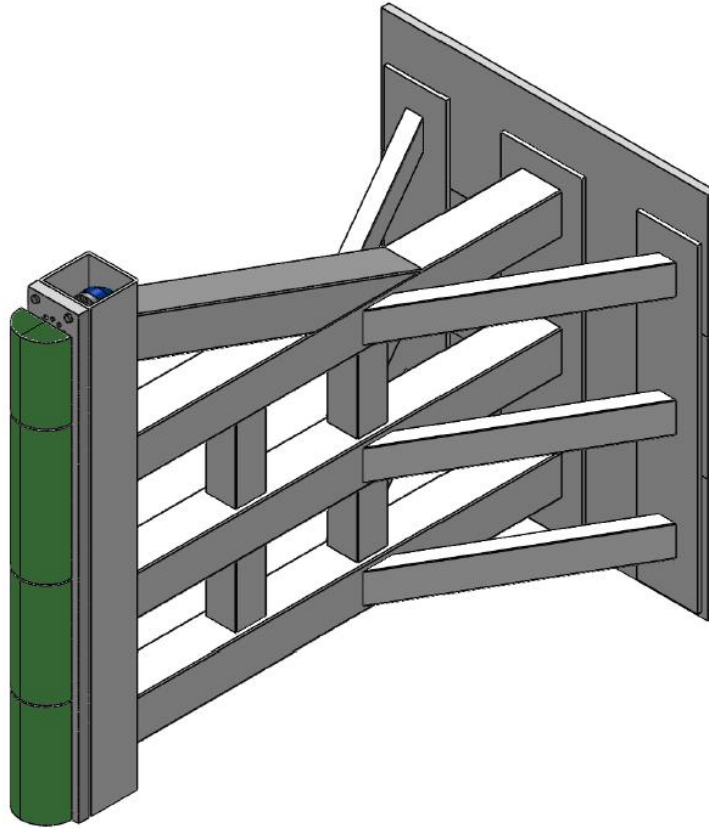

RIGID POLE LOAD CELL LOCATIONS

ID	Units	Height From Ground
1	mm	87
2	mm	468
3	mm	648
4	mm	978
5	mm	1168
6	mm	1651
7	mm	1816
8	mm	2057

DATA SHEET NO. 8**POST-TEST OBSERVATIONS**Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5201Test Program: NCAP Side Pole Impact Test Test Date: 01/23/12**TEST DUMMY INFORMATION AND CONTACT POINTS**

Dummy Body Part	Driver SID-IIs Dummy
Face	Curtain Airbag
Top of Head	Curtain Airbag
Left Side of Head	Curtain Airbag
Back of Head	Curtain Airbag, Head Restraint
Left Shoulder	Torso/Pelvis Airbag
Upper Torso	Seat
Lower Torso	Seat, Torso/Pelvis Airbag
Left Hip	Torso/Pelvis Airbag
Left Knee	Door Panel, Right Knee

POST-TEST DOOR PERFORMANCE

Description	Struck Side		Non-Struck Side		Rear Hatch/Other Door
	Front	Rear	Front	Rear	
Remained Closed and Operational	No	No	Yes	Yes	No
Total Separation from Vehicle at Hinges or Latches	No	No	No	No	No
Latch or Hinge System Pulled Out of Their Anchorages	No	No	No	No	No
Disengaged from Latched Position	No	No	No	No	Yes
Latch Separated from Striker	No	No	No	No	No
Jammed Shut	Yes	Yes	No	No	No
If Door Opened at Striker, Record Width of Opening at Striker (mm)	n/a	n/a	n/a	n/a	n/a

POST-TEST SEAT PERFORMANCE

Description	Struck Side		Non-Struck Side	
	Front	Rear	Front	Rear
Seat Movement Along Seat Track	No	No	No	No
Seat Disengagement from Floor Pan	No	No	No	No
Seat Back Movement from Initial Position	No	No	No	No
Seat Back Collapse	No	No	No	No

POST-TEST STRUCTURAL OBSERVATIONS

Critical Areas of Performance	Observations and Conclusions
Pillar Performance	No Separation
Sill Separation	No Separation
Windshield Damage	Broken
Side Window Damage	Left Front Window Broken
Other Notable Effects	Outer Roof Skin Separated from Driver Side Roof Rail

DATA SHEET NO. 8 ... (CONTINUED)**POST-TEST OBSERVATIONS**

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5201
 Test Program: NCAP Side Pole Impact Test Test Date: 01/23/12

SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION

Restraint Type	Struck Side Driver		Struck Side Rear Passenger	
	Mounted	Deployed	Mounted	Deployed
Frontal Airbag	Yes	No	No	
Knee Airbag	No		No	
Side Airbag 1 (Curtain)	Yes	Yes	Yes	Yes
Side Airbag 2 (Torso/Pelvis)	Yes	Yes	No	
Seat Belt Pretensioner	Yes	Yes	No	
Seat Belt Load Limiter	Yes	Yes	No	
Other				


IMPACT POINT LOCATION DATA

Measured Parameter	Units	Tolerance	Value
Vertical Impact Reference Line (Aft of Front Axle)(Intended Impact Point)	mm		1027
Actual Impact Point (Aft of Front Axle)	mm		1022
Horizontal Offset (+ forward / - rearward)	mm	± 38 of Intended Impact Point	5
Angle Between Vehicle's Longitudinal Centerline and Line of Forward Motion	°	75 ± 3	74.5
Trap No. 1 Velocity (Primary)	km/h	31.4 to 33.0	32.0
Trap No. 2 Velocity (Redundant)	km/h	31.4 to 33.0	31.9

DATA SHEET NO. 9

TEST VEHICLE PROFILE MEASUREMENTS

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5201
 Test Program: NCAP Side Pole Impact Test Test Date: 01/23/12

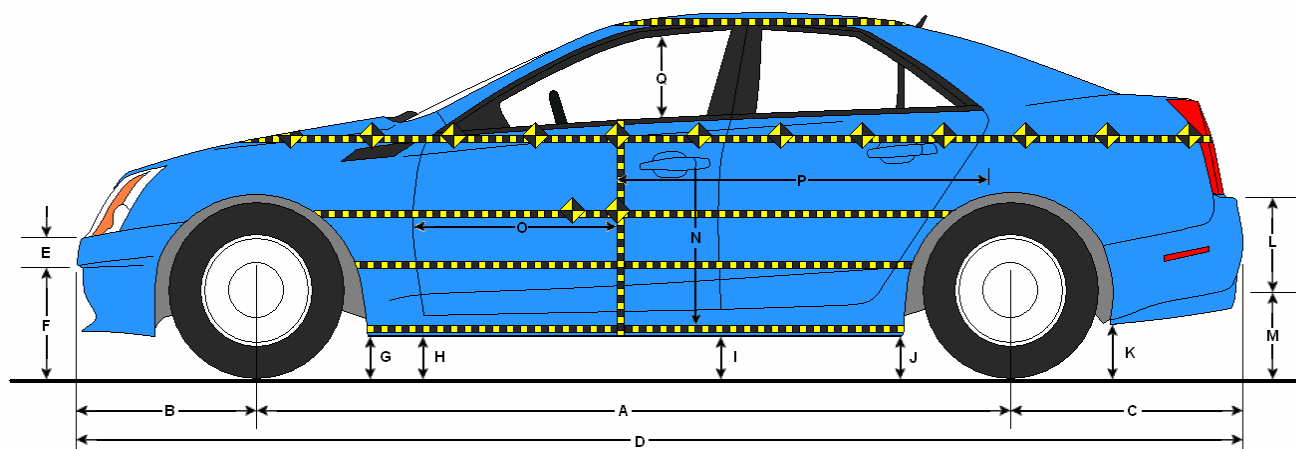

LEFT SIDE VIEW

VEHICLE PRE- AND POST-TEST MEASUREMENT INFORMATION


Code	Description	Pre-Test	Post-Test	Difference
A	Wheelbase	2602	2528	-74
B	Front Axle to FSOV	829	841	12
C	Rear Axle to RSOV	1005	1025	20
D	Total Length at Centerline	4417	4395	-22
E	Front Bumper Thickness	338	338	0
F	Front Bumper Bottom to Ground	233	253	20
G	Sill Height at Front Wheel Well	228	226	-2
H	Sill Height at Front Door Leading Edge	226	232	6
I	Sill Height at B-Pillar	250	249	-1
J1	Sill Height at Rear Wheel Well	253	262	9
J2	Pinch Weld Height at Rear Wheel Well	214	225	11
K	Sill Height Aft of Rear Wheel Well	337	353	16
L	Rear Bumper Thickness	141	138	-3
M	Rear Bumper Bottom to Ground	412	428	16
N	Sill Height to Bottom of Front Window Sill	622	771	149
O	Front Door Leading Edge to Impact CL	396	505	109
P	Rear Door Trailing Edge to Impact CL	1771	1465	-306
Q	Front Window Opening	442	462	20
R	Right Side Length	3088	3106	18
S	Left Side Length	3087	2980	-107
T	Vehicle Width at B-Pillar	1690	1602	-88

All measurements in mm with tolerance of ± 3 mm


DATA SHEET NO. 10

TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5201
 Test Program: NCAP Side Pole Impact Test Test Date: 01/23/12

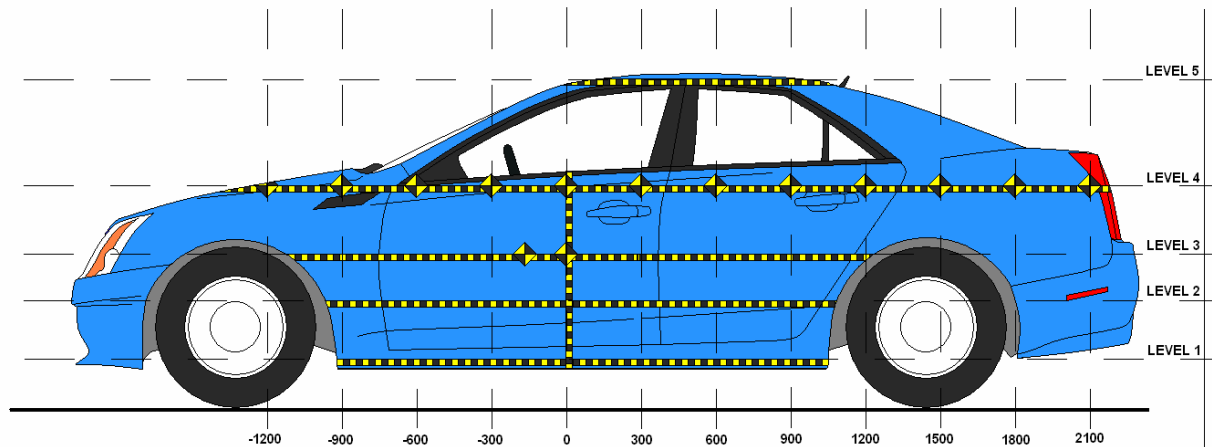

LEFT SIDE VIEW

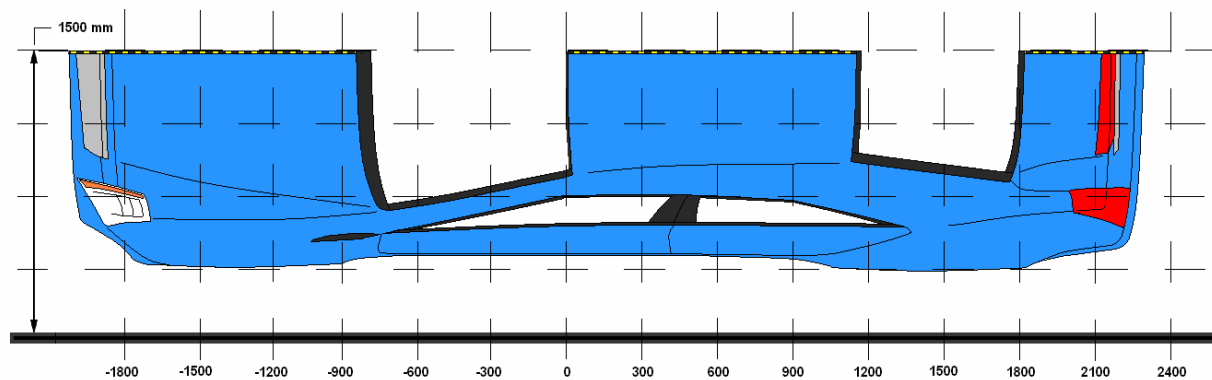

OVERHEAD VIEW

MAXIMUM EXTERIOR CRUSH MEASUREMENTS

Level	Description	Height Above Ground (mm)	Maximum Exterior Static Crush	Distance from Impact
1	Sill Top	280	366	0
2	Occupant H-Point	618	421	0
3	Mid-Door	664	427	0
4	Window Sill	935	370	0
5	Window Top	1464	194	0

DATA SHEET NO. 10 ... (CONTINUED)

TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5201

Test Program: NCAP Side Pole Impact Test Test Date: 01/23/12

EXTERIOR CRUSH MEASUREMENTS AT EACH LEVEL

	Pre-Test (mm)					Post-Test (mm)					Difference (mm)				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
-900				777					821					44	
-750		651	655	758			705	711	813			54	56	55	
-600	700	659	660	742		750	737	733	812		50	78	73	70	
-450	703	659	659	735		837	807	807	849		134	148	148	114	
-300	702	657	656	727		901	904	897	920		199	247	241	193	
-150	703	656	654	723		972	977	981	1003		269	321	327	280	
0	702	655	653	719	955	1068	1076	1080	1089	1149	366	421	427	370	194
150	702	654	652	715	954	1045	1055	1067	1074	1146	343	401	415	359	192
300	703	654	652	712	958	955	962	957	966	1105	252	308	305	254	147
450	702	655	652	710	959	900	852	849	877	1071	198	197	197	167	112
600	702	656	653	709	957	854	792	786	835	1047	152	136	133	126	90
750	709	657	655	709	959	819	771	766	813	1031	110	114	111	104	72
900	712	659	656	709	957	785	749	746	788	1018	73	90	90	79	61
1050	713	660	658	707	958	766	723	722	766	1014	53	63	64	59	56
1200	707	658	658	705	966	737	697	698	739	1013	30	39	40	34	47
1350		652	653	701	974		692	666	712	1014		40	13	11	40
1500			652	699				689	685				37	-14	
1650				701					732					31	
1800				703					729					26	
1950				711					730					19	
2100															
2250															
2400															
2550															
2700															
2850															

DATA SHEET NO. 10 ... (CONTINUED)


TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan

NHTSA No. MC5201

Test Program: NCAP Side Pole Impact Test

Test Date: 01/23/12

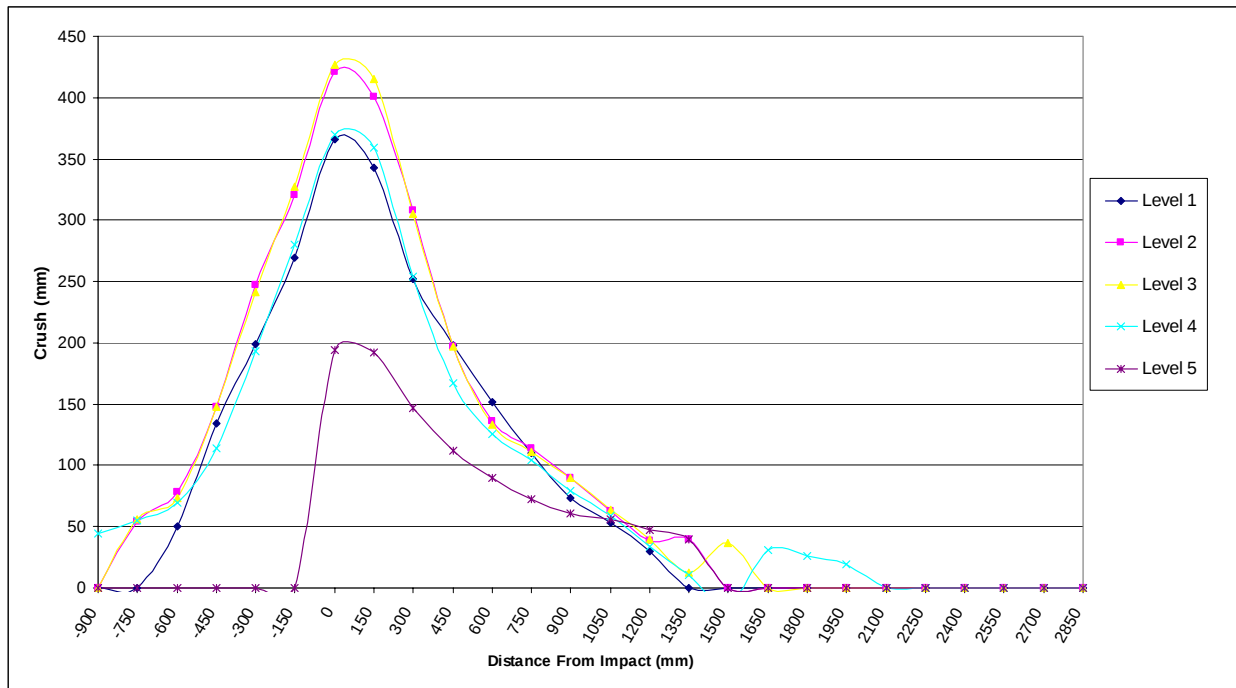


DATA SHEET NO. 11

FMVSS NO. 301 STATIC ROLLOVER RESULTS

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5201
 Test Program: NCAP Side Pole Impact Test Test Date: 01/23/12
 Temperature at Time of Impact: 7.2° C Test Time: 12:28 PM

- A. From impact until vehicle motion ceases: 0 oz.
 (Maximum allowable = 1 oz.)
- B. For the 5 minute period after motion ceases: 0 oz.
 (Maximum allowable = 5 oz.)
- C. For the following 25 minutes: 0 oz.
 (Maximum allowable = 1 oz./minute)
- D. Spillage Details: No spillage occurred

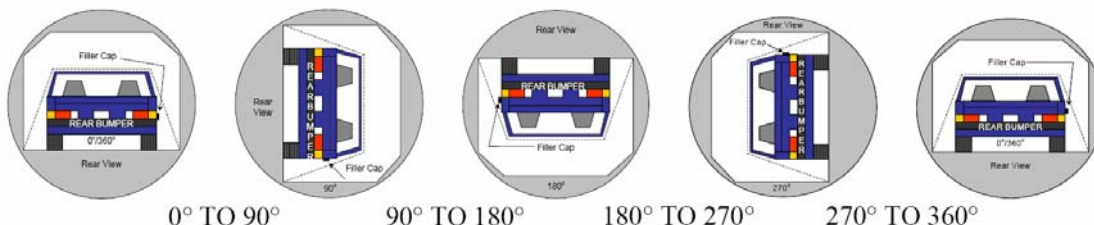

SOLVENT COLLECTION TIME TABLE IN SECONDS

Test Phase	Rotation Time	Hold Time	Total Time
0° To 90°	83	300	383
90° To 180°	84	300	384
180° To 270°	76	300	376
270° To 360°	80	300	380

FMVSS 301 SPILLAGE TABLE

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° To 90°	0			
90° To 180°	0			
180° To 270°	0			
270° To 360°	0			

SOLVENT SPILLAGE LOCATION TABLE

Test Phase	Spillage Location
0° To 90°	No Spillage Occurred
90° To 180°	No Spillage Occurred
180° To 270°	No Spillage Occurred
270° To 360°	No Spillage Occurred

DATA SHEET NO. 14


DUMMY/VEHICLE TEMPERATURE AND HUMIDITY STABILIZATION

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan

NHTSA No. MC5201

Test Program: NCAP Side Pole Impact Test

Test Date: 01/23/12

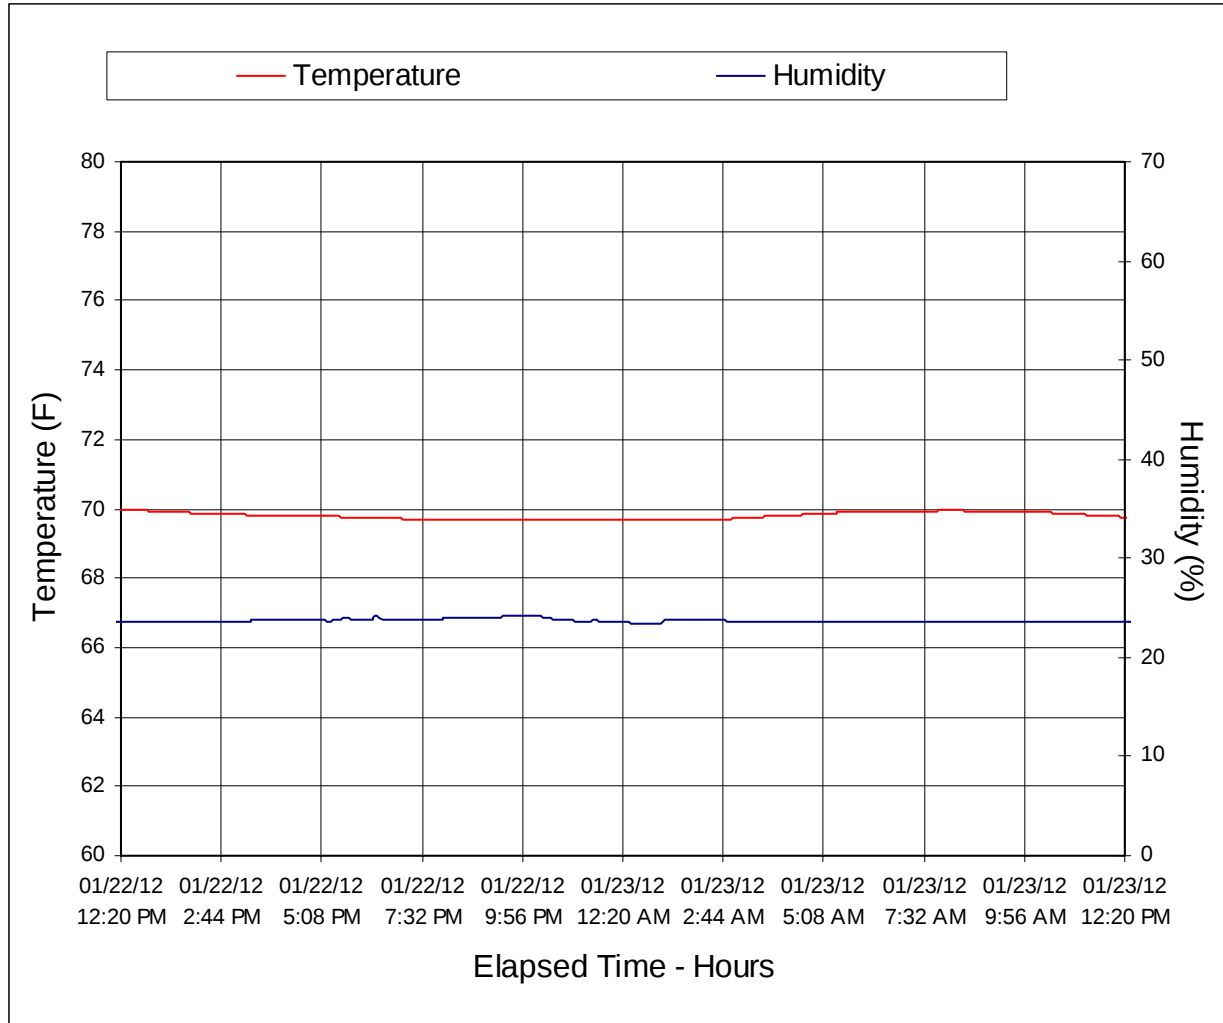

APPENDIX A
PHOTOGRAPHS

TABLE OF PHOTOGRAPHS

Figure		Page
1	As Delivered Right Front Three-Quarter View of Test Vehicle	A-1
2	As Delivered Left Rear Three-Quarter View of Test Vehicle	A-1
3	Pre-Test Frontal View of Test Vehicle	A-2
4	Post-Test Frontal View of Test Vehicle	A-2
5	Pre-Test Left Front Three-Quarter View of Test Vehicle	A-3
6	Post-Test Left Front Three-Quarter View of Test Vehicle	A-3
7	Pre-Test Left Side View of Test Vehicle	A-4
8	Post-Test Left Side View of Test Vehicle	A-4
9	Pre-Test Left Rear Three-Quarter View of Test Vehicle	A-5
10	Post-Test Left Rear Three-Quarter View of Impact Zone	A-5
11	Pre-Test Rear View of Test Vehicle	A-6
12	Post-Test Rear View of Test Vehicle	A-6
13	Pre-Test Right Side View of Test Vehicle	A-7
14	Post-Test Right Side View of Test Vehicle	A-7
15	Pre-Test Overhead View of Test Area	A-8
16	Post-Test Overhead View of Test Area	A-8
17	Pre-Test Left Side View of Pole Positioned Against Side of Test Vehicle	A-9
18	Pre-Test Right Side View of Pole Positioned Against Side of Test Vehicle	A-9
19	Pre-Test Close-Up View of Impact Point Target	A-10
20	Post-Test Close-Up View of Impact Point Target	A-10
21	Pre-Test Front Close-Up View of Dummy Head and Chest	A-11
22	Post-Test Front Close-Up View of Dummy Head and Chest	A-11
23	Pre-Test Left Side View of Dummy Showing Belt and Chalking,	A-12
24	Pre-Test Left Side View of Dummy Shoulder and Door Top View	A-12
25	Post-Test Left Side View of Dummy Shoulder and Door Top View	A-13
26	Pre-Test Frontal View of Seat Back Prior to Dummy Positioning	A-13
27	Pre-Test Frontal View of Dummy Head and Shoulders in Relation to Head Restraint	A-14
28	Pre-Test Front View of Seat Pan Prior to Dummy Positioning	A-14
29	Pre-Test Overhead View of Dummy Thighs on Seat Pan	A-15
30	Pre-Test View of Dummy's Neck Showing Position of Adjustable Neck Bracket	A-15
31	Pre-Test View of Dummy's Head Showing Dummy's Head is Level	A-16
32	Pre-Test Placement of Dummy's Feet	A-16
33	Pre-Test View of Belt Anchorage for Dummy	A-17
34	Pre-Test Left Side View of Steering Wheel	A-17
35	View of Disengaged Parking Brake	A-18

TABLE OF PHOTOGRAPHS ... (CONTINUED)

Figure		Page
36	Pre-Test View of Parking Brake	A-18
37	Pre-Test Close-Up Left Side View of Driver Seat Track	A-19
38	Pre-Test Close-Up View of Driver Seat Back	A-19
39	Pre-Test Close-Up View of Driver Seat Back or Head Restraint	A-20
40	Pre-Test Driver Dummy and Door Clearance View	A-20
41	Post-Test Driver Dummy and Door Clearance View	A-21
42	Pre-Test Right Side View of Dummy and Front Seat of Occupant Compartment	A-21
43	Post-Test Right Side View of Dummy and Front Seat of Occupant Compartment	A-22
44	Pre-Test Inner Door Panel View	A-22
45	Post-Test Inner Door Panel View Showing Dummy Contact Locations	A-23
46	Post-Test Dummy Close-Up Head Contact with Vehicle Interior View	A-23
47	Post-Test Dummy Close-Up Head Contact with Side Airbag View	A-24
47a	Post-Test Dummy Close-Up Torso Contact with Frontal Airbag View	A-24
48	Post-Test Dummy Close-Up Torso Contact with Vehicle Interior View	A-25
49	Post-Test Dummy Close-Up Torso Contact with Side Airbag View	A-25
50	Post-Test Dummy Close-Up Pelvis Contact with Vehicle Interior View	A-26
51	Post-Test Dummy Close-Up Pelvis Contact with Side Airbag View	A-26
52	Pre-Test View of Fuel Filler Cap or Fuel Filler Neck	A-27
53	Post-Test View of Fuel Filler Cap or Fuel Filler Neck	A-27
54	Close-Up View of Vehicle's Certification Label	A-28
55	Close-Up View of Vehicle's Tire Information Placard or Label	A-28
56	Pre-Test Pole Barrier Front View	A-29
57	Post-Test Pole Barrier Front View	A-29
58	Pre-Test Pole Barrier Side View	A-30
59	Post-Test Pole Barrier Side View	A-30
60	Pre-Test Ballast View	A-31
61	Post-Test Primary and Redundant Speed Trap Read-Out	A-31
62	FMVSS No. 301 Rollover 0 Degrees	A-32
63	FMVSS No. 301 Rollover 90 Degrees	A-32
64	FMVSS No. 301 Rollover 180 Degrees	A-33
65	FMVSS No. 301 Rollover 270 Degrees	A-33
66	FMVSS No. 301 Rollover 360 Degrees	A-34
67	Impact Event	A-34
68	Monroney Label	A-35
69	Head Restraint Use and Adjustment Information from Vehicle Owner's Manual	A-35



FIGURE 1. As-Delivered Right Front Three-Quarter View of Test Vehicle



FIGURE 2. As-Delivered Left Rear Three-Quarter View of Test Vehicle



FIGURE 3. Pre-Test Frontal View of Test Vehicle



FIGURE 4. Post-Test Frontal View of Test Vehicle



FIGURE 5. Pre-Test Left Front Three-Quarter View of Test Vehicle



FIGURE 6. Post-Test Left Front Three-Quarter View of Test Vehicle



FIGURE 7. Pre-Test Left Side View of Test Vehicle

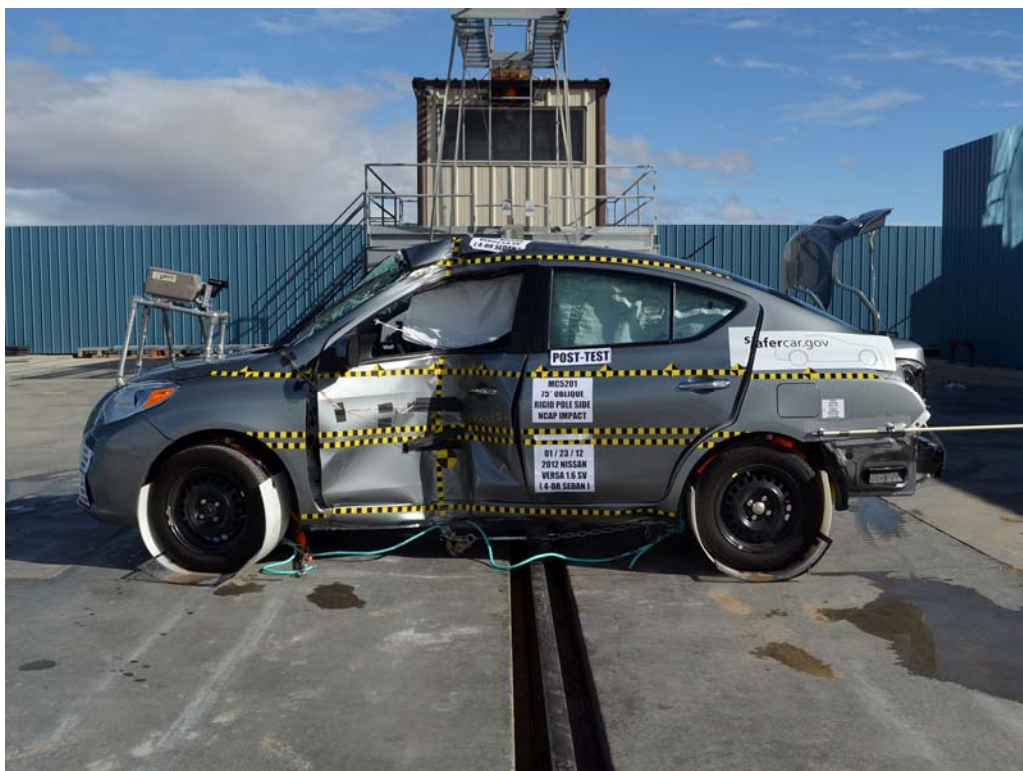


FIGURE 8. Post-Test Left Side View of Test Vehicle



FIGURE 9. Pre-Test Left Rear Three-Quarter View of Test Vehicle



FIGURE 10. Post-Test Left Rear Three-Quarter View of Test Vehicle



FIGURE 11. Pre-Test Rear View of Test Vehicle



FIGURE 12. Post-Test Rear View of Test Vehicle



FIGURE 13. Pre-Test Right Side View of Test Vehicle



FIGURE 14. Post-Test Right Side View of Test Vehicle



FIGURE 15. Pre-Test Overhead View of Test Vehicle and Pole

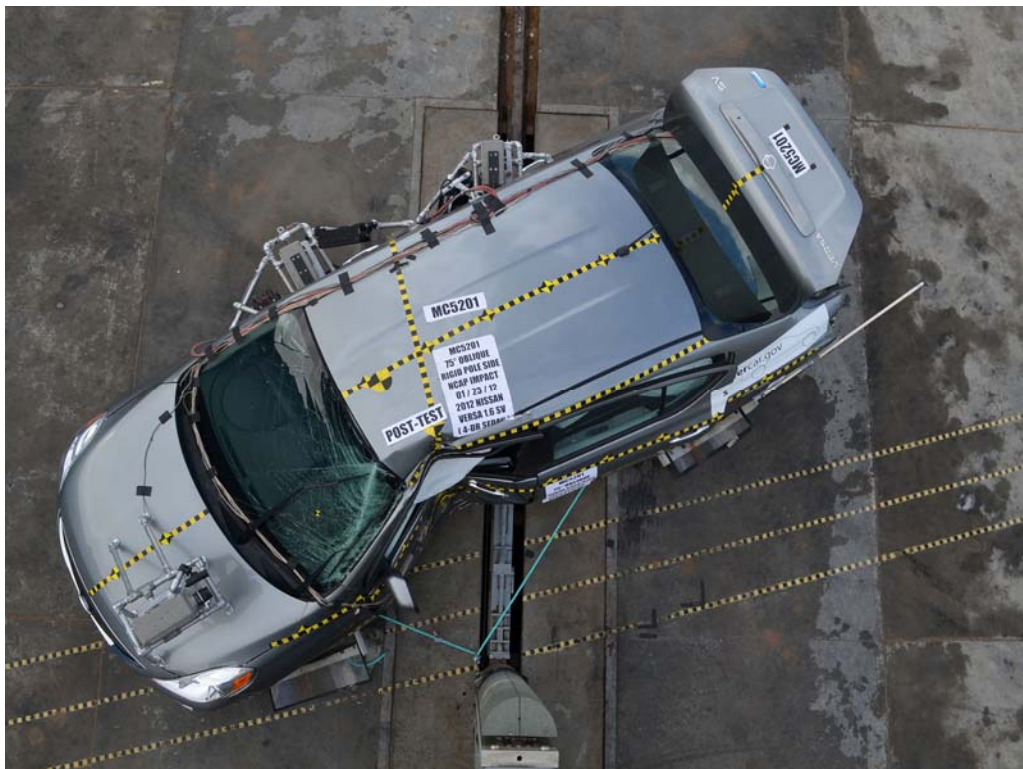


FIGURE 16. Post-Test Overhead View of Test Vehicle and Pole



FIGURE 17. Pre-Test Left Side View of Pole
Positioned Against Side of Vehicle at Impact Point



FIGURE 18. Pre-Test Right Side View of Pole
Positioned Against Side of Vehicle at Ideal Impact Point



FIGURE 19. Pre-Test Close-Up View of Impact Point Target



FIGURE 20. Post-Test Close-Up View of Impact Point Target Showing Impact Location



FIGURE 21. Pre-Test Front Close-Up View of Dummy

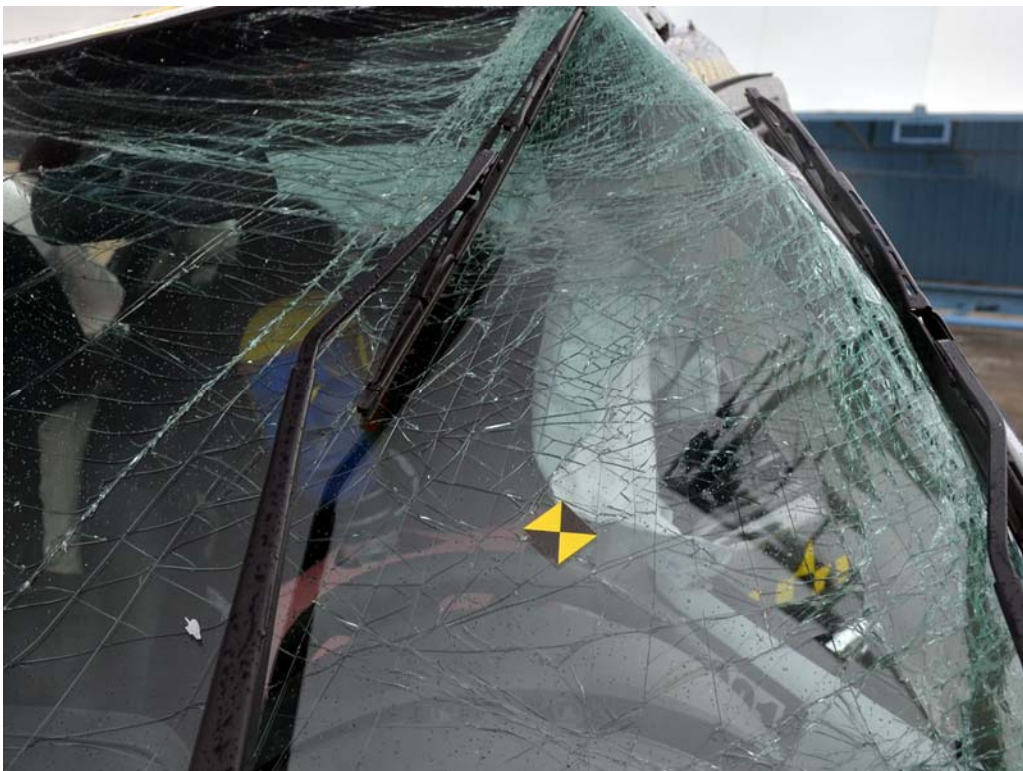


FIGURE 22. Post-Test Front Close-Up View of Dummy



FIGURE 23. Pre-Test Left Side View of Dummy Showing Belt, Chalking, and Contact Switches



FIGURE 24. Pre-Test Left Side View of Dummy Shoulder and Driver Door Top View



FIGURE 25. Post-Test Left Side View of Dummy Shoulder and Door Top View



FIGURE 26. Pre-Test Frontal View of Seat Back Prior to Dummy Positioning



FIGURE 27. Pre-Test Frontal View of Dummy Head and Shoulders
in Relation to Head Restraint



FIGURE 28. Pre-Test Frontal View of Seat Pan Prior to Dummy Positioning



FIGURE 29. Pre-Test Overhead View of Dummy Thighs on Seat Pan



FIGURE 30. Pre-Test View of Dummy's Neck Showing Position of Adjustable Neck Bracket



FIGURE 31. Pre-Test View of Dummy's Head Showing Dummy's Head Is Level



FIGURE 32. Pre-Test Placement of Dummy's Feet



FIGURE 33. Pre-Test View of Belt Anchorage for Dummy



FIGURE 34. Pre-Test Left Side View of Steering Wheel

Photograph Not Available

FIGURE 35. View of Disengaged Parking Brake

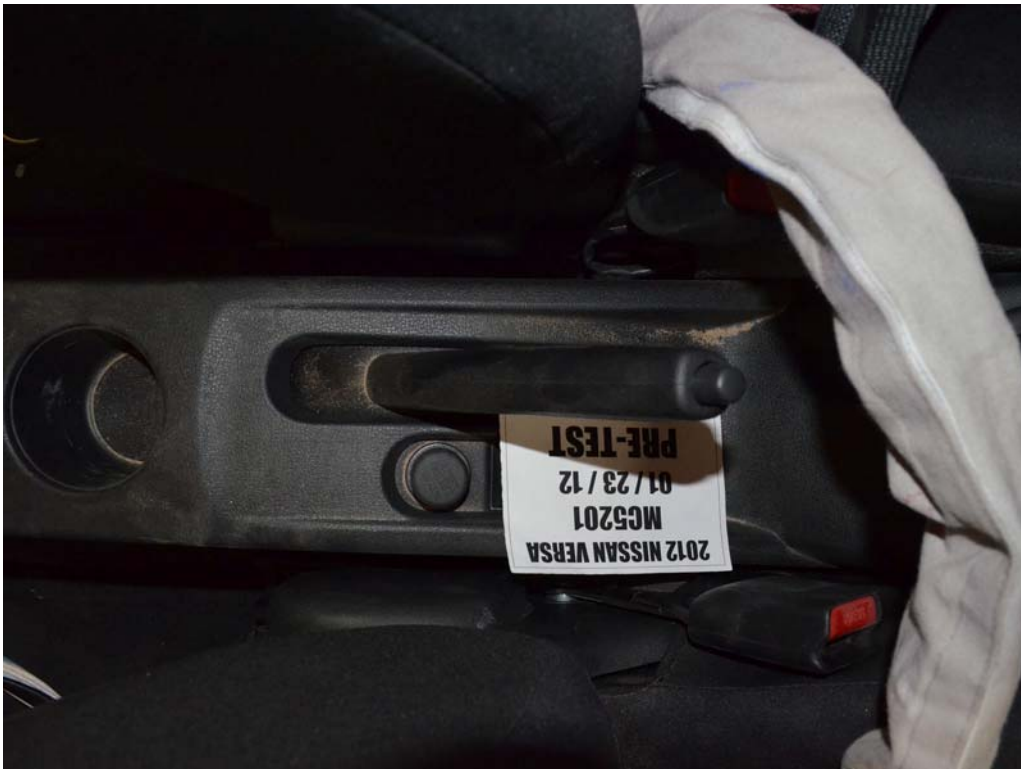


FIGURE 36. Pre-Test View of Parking Brake



FIGURE 37. Pre-Test Close-Up Left Side View of Driver Seat Track



FIGURE 38. Pre-Test Close-Up Left Side View of Driver Seat Back



FIGURE 39. Pre-Test Close-Up View of Driver Seat Back or Head Restraint



FIGURE 40. Pre-Test Driver Dummy and Door Clearance



FIGURE 41. Post-Test Driver Dummy and Door Clearance



FIGURE 42. Pre-Test Right Side View of Dummy and Front Seat Occupant Compartment



FIGURE 43. Post-Test Right Side View of Dummy and Front Seat Occupant Compartment



FIGURE 44. Pre-Test Inner Driver Door Panel View



FIGURE 45. Post-Test Inner Driver Door Panel View
Showing Dummy Contact Locations



FIGURE 46. Post-Test Dummy Close-Up Head Contact with Vehicle Interior View



FIGURE 47. Post-Test Dummy Close-Up Head Contact with Side Airbag View



FIGURE 48. Post-Test Dummy Close-Up Torso Contact with Vehicle Interior View



FIGURE 49. Post-Test Dummy Close-Up Torso Contact with Side Airbag View

Photograph Not Applicable

No Driver Dummy Pelvis
Contact With
Vehicle Interior

FIGURE 50. Post-Test Dummy Close-Up Pelvis Contact with Vehicle Interior View



FIGURE 51. Post-Test Dummy Close-Up Pelvis Contact with Side Airbag View



FIGURE 52. Pre-Test View of Fuel Filler Cap or Fuel Filler Neck



FIGURE 53. Post-Test View of Fuel Filler Cap or Fuel Filler Neck



FIGURE 54. Close-Up View of Vehicle's Certification Label



FIGURE 55. Close-Up View of Vehicle's Tire Information Placard



FIGURE 56. Pre-Test Pole Barrier Front View



FIGURE 57. Post-Test Pole Barrier Front View



FIGURE 58. Pre-Test Pole Barrier Side View



FIGURE 59. Post-Test Pole Barrier Side View



FIGURE 60. Pre-Test Ballast View



FIGURE 61. Post-Test Primary and Redundant Speed Trap Read-Out



FIGURE 62. FMVSS No. 301-305 Rollover 0 Degrees



FIGURE 63. FMVSS No. 301-305 Rollover 90 Degrees



FIGURE 64. FMVSS No. 301-305 Rollover 180 Degrees

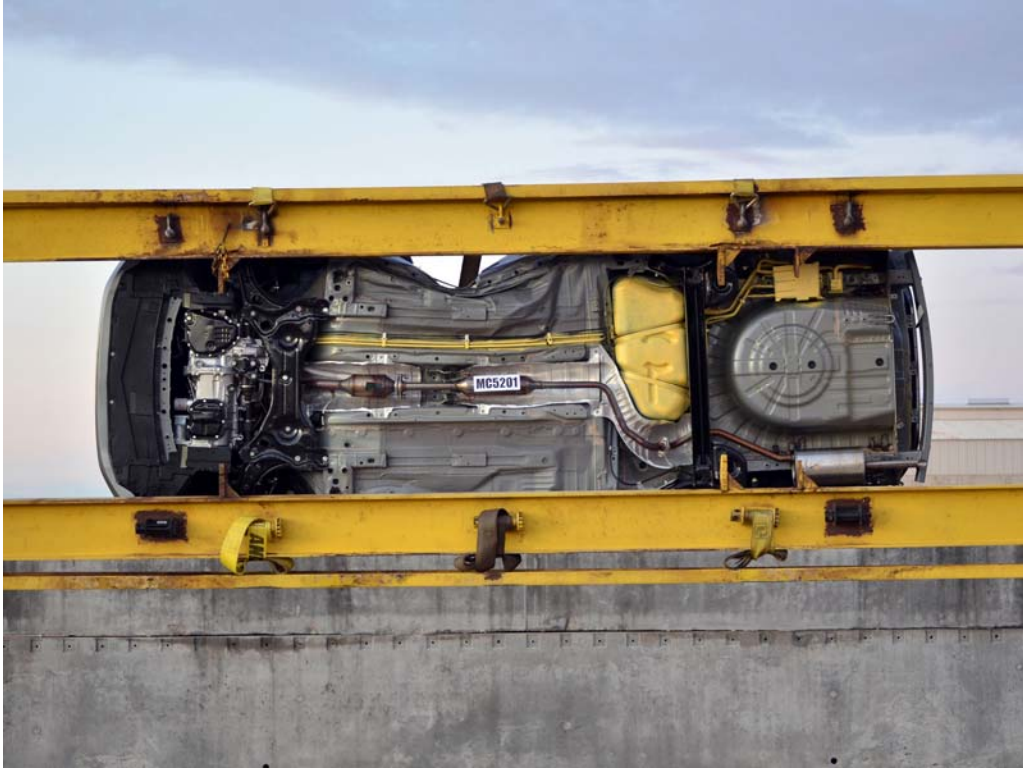


FIGURE 65. FMVSS No. 301-305 Rollover 270 Degrees

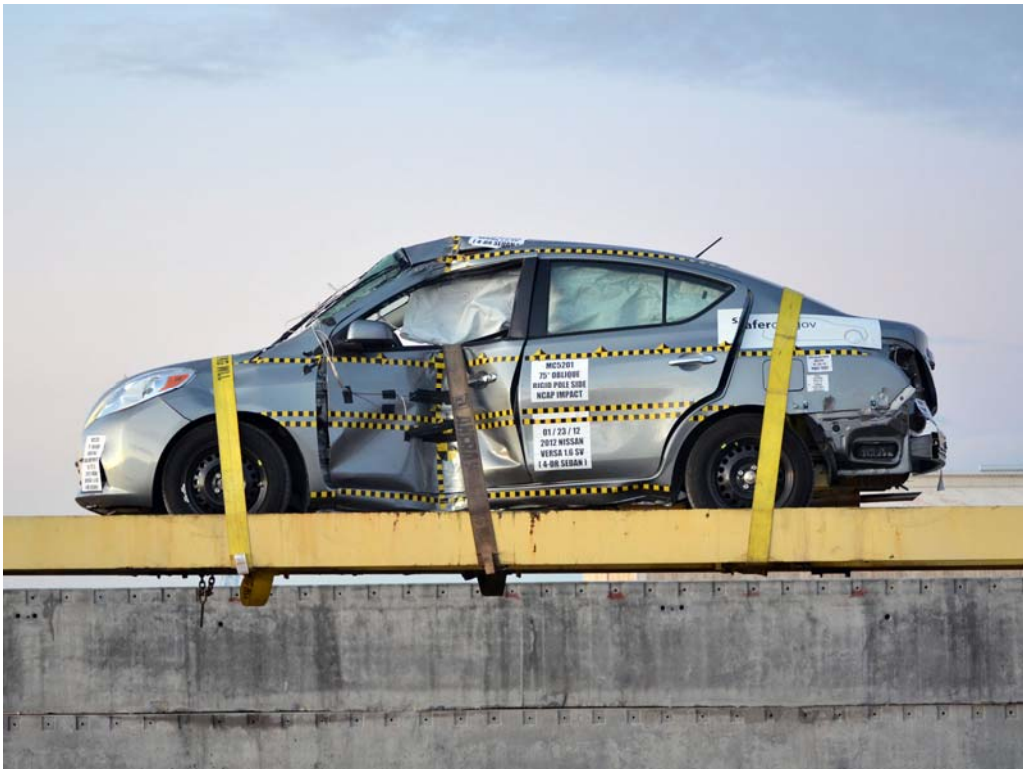


FIGURE 66. FMVSS No. 301-305 Rollover 360 Degrees



FIGURE 67. Impact Event

2012 VERSA 1.6 SV SDN

A WHOLE NEW LEVEL OF COMFORT & CONVENIENCE

MECHANICAL & PERFORMANCE
 1.6L DCHC 16-Valve 4-Cylinder Engine
 Next Generation Xtronic CVT
 Continuously Variable Transmission
 Front and Rear GearShift Bars
 Power-Assisted Ventilated Front Disc /
 Rear Drum Brakes
 17" Steel Wheels w/ Full Wheel Covers

SAFETY & SECURITY
 Nissan Advanced Air Bag System (AABS) w/
 Dual-Stage Supplemental Front Air Bags
 Front Seat Mounted Side Impact
 Supplemental Air Bags
 Roof-Mounted Curtain Side Impact
 Supplemental Air Bags
 Lateral Anchors and Tethers for Children
 (LATCH)
 ABS Brake System (ABS)
 Traction Control System (TCS)
 Vehicle Dynamic Control (VDC)
 Electronic Brake Force Distribution (EBD)
 and Brake Assist
 Tire Pressure Monitoring System (TPMS)

COMFORT & CONVENIENCE
 Air Conditioning
 6-Way Adjustable Driver's Seat
 Upgraded Cloth
 AM/FM/CD/USB in Audio System w/ 4 Speakers
 Power Windows w/ Driver's 1-Touch Auto Down
 Power Door Locks w/ Auto-Locking Feature
 Remote Keyless Entry
 Cruise Control
 Silver Trim Accents on Steering Wheel
 Dual Front and Rear Cupholders
 Remote Trunk Release and Trunk Light

EXTERIOR
 Chrome Front Grille and Door Handles
 Chrome Multi-Reflector Halogen Headlights
 Body-Color Power Sideview Mirrors
 Body-Color Front and Rear Fascias

Manufacturer's Suggested Retail Base Price: \$14,990.00
Options included by Manufacturer: CARPETED FLOOR AND TRUNK MATS 170.00
Destination Charge: 760.00
Total* \$16,920.00

*Does not include dealer installed options and accessories, local taxes or license fees. This label has been applied pursuant to federal law. Do not remove prior to delivery to the ultimate purchaser.

EPA Fuel Economy Estimates

CITY MPG
30
 Expected range for most drivers
24 to 36 MPG

Estimated Annual Fuel Cost
\$1,364
 based on 15,000 miles at \$3.00 per gallon

HIGHWAY MPG
38
 Expected range for most drivers
31 to 45 MPG

Combined Fuel Economy
33
 (14 mpg city / 41 mpg highway)

See the FREE Fuel Economy Guide at dealers or www.fueleconomy.gov

GOVERNMENT SAFETY RATINGS

Frontal Crash	Driver Passenger	To Be Rated To Be Rated
Star ratings based on the risk of injury in a frontal impact. Frontal ratings should ONLY be compared to other vehicles of similar size and weight.		
Side Crash	Front seat Rear seat	To Be Rated To Be Rated
Star ratings based on the risk of injury in a side impact.		
Rollover	To Be Rated	
Star ratings based on the risk of rollover in a single vehicle crash.		
Star ratings range from 1 to 5 stars (★ ★ ★ ★ ★), with 5 being the highest. Source: National Highway Traffic Safety Administration (NHTSA).		
www.safercar.gov or 1-888-327-4236		
This Vehicle qualifies for Nissan's Security+Plus Vehicle Protection Plan The only service agreement backed by Nissan! Ask your dealer for details, or call 1-800-NISSAN-1 for more information		
DELIVERY VEHICLE COLORS: EXT. MAGNETIC GRAY INT. CHARCOAL FINAL ASSEMBLY POINT: AGUAS/ABV JMX TRANSPORT METHOD: TRUCK DEALER: PUENTE HILLS NISSAN 17300 E GALE AVENUE CITY OF INDUSTRY CA 91748		
VIN: 3N1CN7AP6CL820758 EMS: 50 STATE EMISSIONS MDL: 11212-820758 K38-G OPT: D-C03L93		
20110916020530A55258		

FIGURE 68. Monroney Label

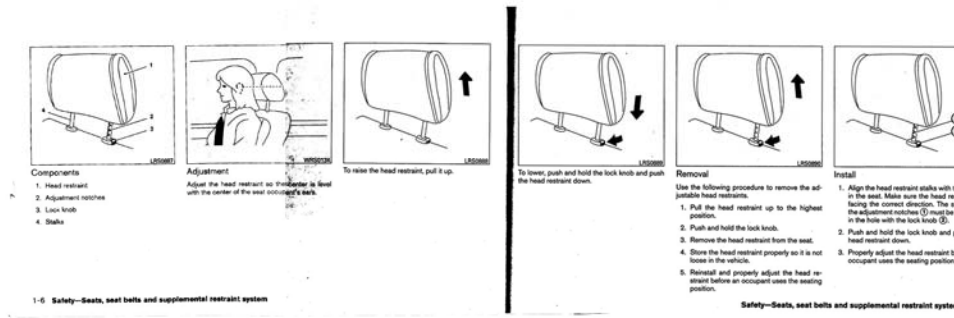


FIGURE 69. Head Restraint Use and Adjustment
Information from Vehicle Manual

APPENDIX B
DUMMY RESPONSE DATA

TABLE OF DATA PLOTS

Plot		Page
1	Driver Head Acceleration (X) Primary vs. Time	B-1
2	Driver Head Acceleration (Y) Primary vs. Time	B-1
3	Driver Head Acceleration (Z) Primary vs. Time	B-1
4	Driver Head Resultant Acceleration Primary vs. Time	B-1
5	Driver Lower Spine T12 Acceleration (X) vs. Time	B-2
6	Driver Lower Spine T12 Acceleration (Y) vs. Time	B-2
7	Driver Lower Spine T12 Acceleration (Z) vs. Time	B-2
8	Driver Lower Spine T12 Resultant Acceleration vs. Time	B-2
9	Driver Iliac Wing Force on Impact Side (Y) vs. Time	B-3
10	Driver Acetabulum Force on Impact Side (Y) vs. Time	B-3
11	Driver Total Pelvis Force on Impact Side (Y) vs. Time	B-3

The following additional data for this test can be obtained from the Research and Development section of the NHTSA website. The website can be found at

www.NHTSA.dot.gov

Additional Driver Dummy Instrumentation Data

Driver Head Acceleration Redundant (X)
Driver Head Acceleration Redundant (Y)
Driver Head Acceleration Redundant (Z)
Driver Upper Thorax Rib Deflection (Y)
Driver Middle Thorax Rib Deflection (Y)
Driver Lower Thorax Rib Deflection (Y)
Driver Upper Abdomen Rib Deflection (Y)
Driver Lower Abdomen Rib Deflection (Y)

Vehicle Instrumentation Data

Vehicle Center of Gravity Acceleration (X)
Vehicle Center of Gravity Acceleration (Y)
Vehicle Center of Gravity Acceleration (Z)
Left Floor Sill Acceleration (Y)
Left A-Pillar Sill Acceleration (Y)
Left Lower A-Pillar Acceleration (Y)
Left Mid A-Pillar Acceleration (Y)


Left B-Pillar Sill Acceleration
Left Lower B-Pillar Acceleration (Y)
Left Mid B-Pillar Acceleration (Y)
Driver Seat Track at Dummy Hip Point Acceleration (Y)
Engine Top Acceleration (X)
Engine Top Acceleration (Y)
Firewall Center Acceleration (Y)
Right Roof at Vertical Impact Reference Line Acceleration (Y)
Right Sill at Vertical Impact Reference Line Acceleration (Y)
Rear Floorpan Behind Rear Axle at Centerline Acceleration (X)
Rear Floorpan Behind Rear Axle at Centerline Acceleration (Y)

Pole Instrumentation Data


Load Cell Pole Barrier #1 Force (Y)
Load Cell Pole Barrier #2 Force (Y)
Load Cell Pole Barrier #3 Force (Y)
Load Cell Pole Barrier #4 Force (Y)
Load Cell Pole Barrier #5 Force (Y)
Load Cell Pole Barrier #6 Force (Y)
Load Cell Pole Barrier #7 Force (Y)
Load Cell Pole Barrier #8 Force (Y)

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan
 Test Program: 32 km/h (20 mph) Side Impact NCAP 75° Rigid Pole Test


Test Date: 1/23/12
 NHTSA No.: MC5201

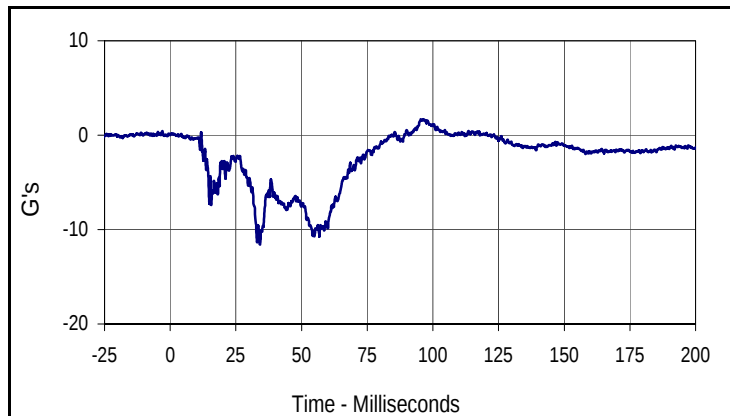


Curve Description			
Driver Head Acceleration X Primary			
Plot No.	Type	SAE Class	Units
001	FIL	1000	G's
Max	Time	Min	Time
1.7	95.4	-11.6	34.2

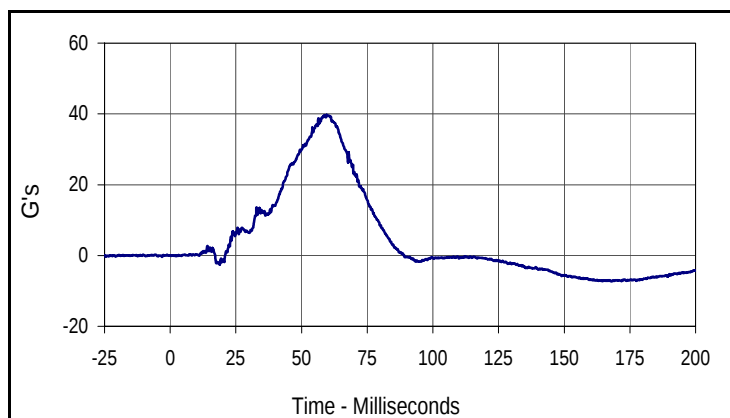

Curve Description			
Driver Head Acceleration Y Primary			
Plot No.	Type	SAE Class	Units
002	FIL	1000	G's
Max	Time	Min	Time
39.8	59.6	-7.3	167.7

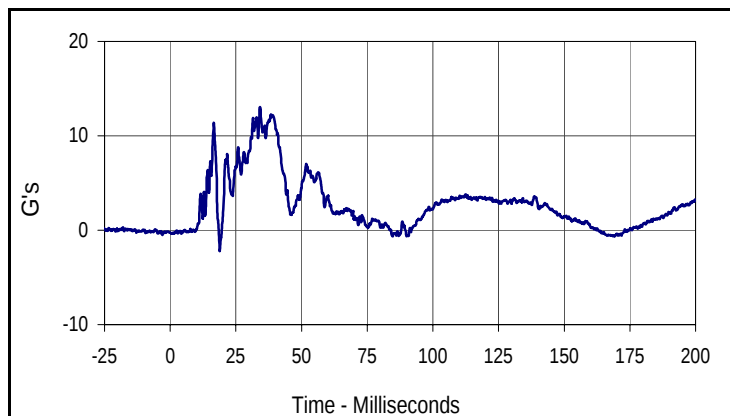


Curve Description			
Driver Head Acceleration Z Primary			
Plot No.	Type	SAE Class	Units
003	FIL	1000	G's
Max	Time	Min	Time
13.1	34.2	-2.2	18.9

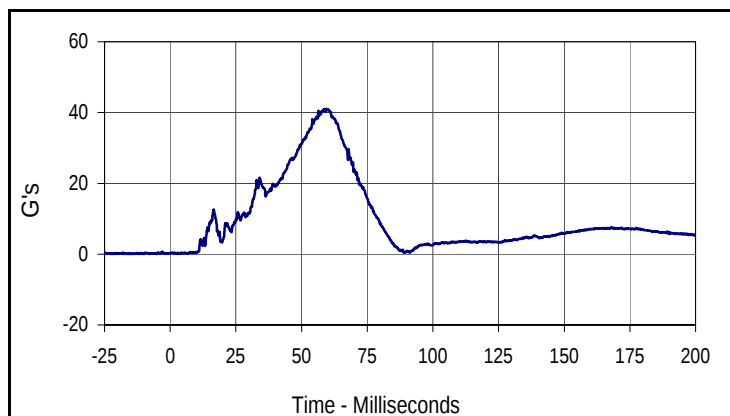


Curve Description			
Driver Head Acceleration Primary Res.			
Plot No.	Type	SAE Class	Units
004	RES	1000	G's
Max	Time	Min	Time
41.0	59.6	0.0	2.5

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan
 Test Program: 32 km/h (20 mph) Side Impact NCAP 75° Rigid Pole Test


Test Date: 1/23/12
 NHTSA No.: MC5201

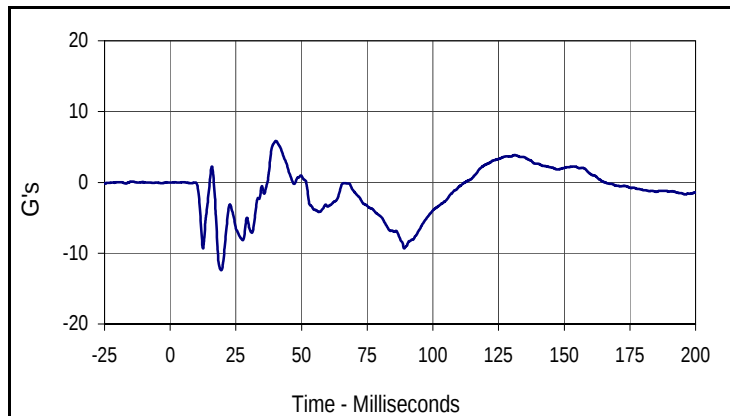


Curve Description			
Driver Lower Spine T12 Acceleration X			
Plot No.	Type	SAE Class	Units
005	FIL	180	G's
Max	Time	Min	Time
5.9	40.2	-12.4	19.4

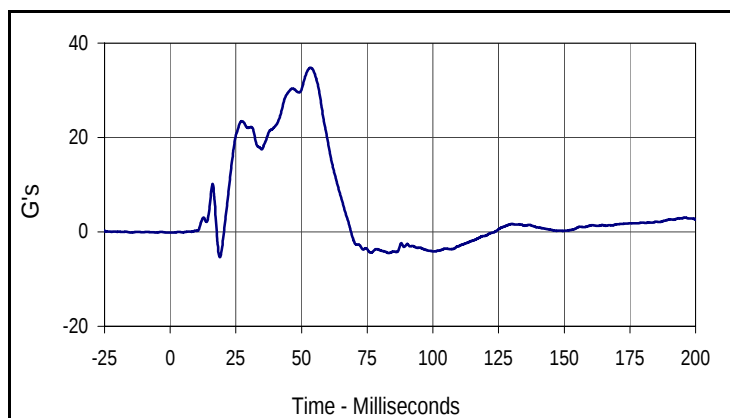

Curve Description			
Driver Lower Spine T12 Acceleration Y			
Plot No.	Type	SAE Class	Units
006	FIL	180	G's
Max	Time	Min	Time
34.8	53.4	-5.4	18.9

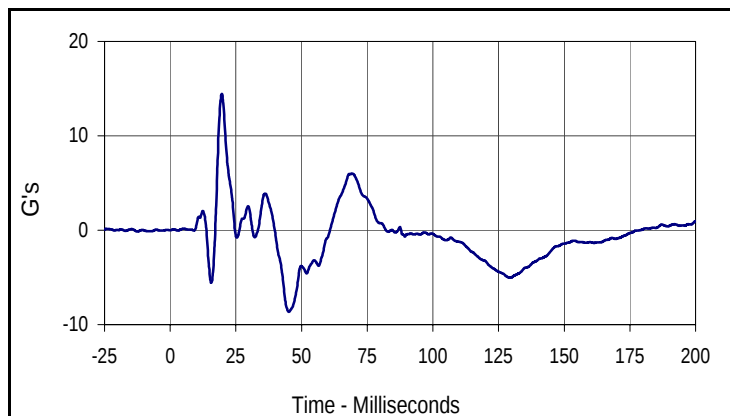


Curve Description			
Driver Lower Spine T12 Acceleration Z			
Plot No.	Type	SAE Class	Units
007	FIL	180	G's
Max	Time	Min	Time
14.4	19.7	-8.6	45.1

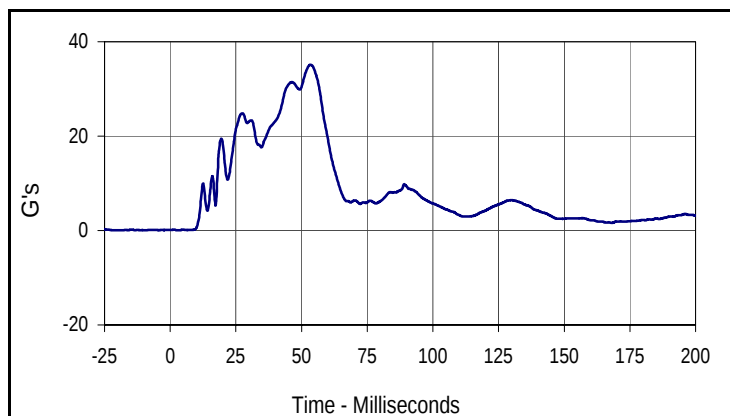


Curve Description			
Driver Lower Spine T12 Acceleration Res.			
Plot No.	Type	SAE Class	Units
008	RES	180	G's
Max	Time	Min	Time
35.1	53.4	0.0	3.5

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan
 Test Program: 32 km/h (20 mph) Side Impact NCAP 75° Rigid Pole Test


Test Date: 1/23/12
 NHTSA No.: MC5201

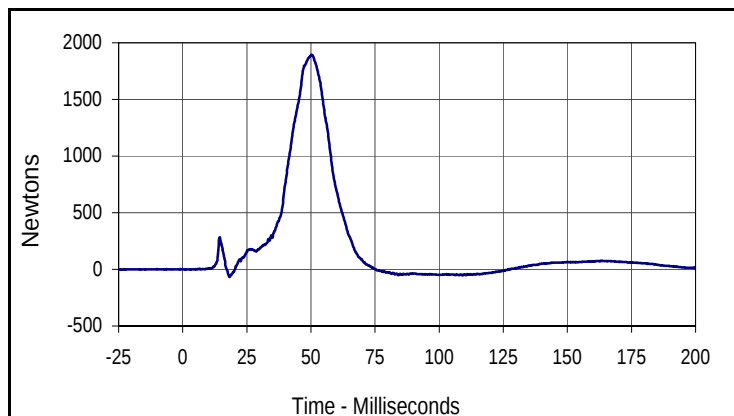

Curve Description			
Driver Iliac Wing Force on Impact Side Y			
Plot No.	Type	SAE Class	Units
009	FIL	600	Newtontons
Max	Time	Min	Time
1894.6	50.2	-69.0	18.2

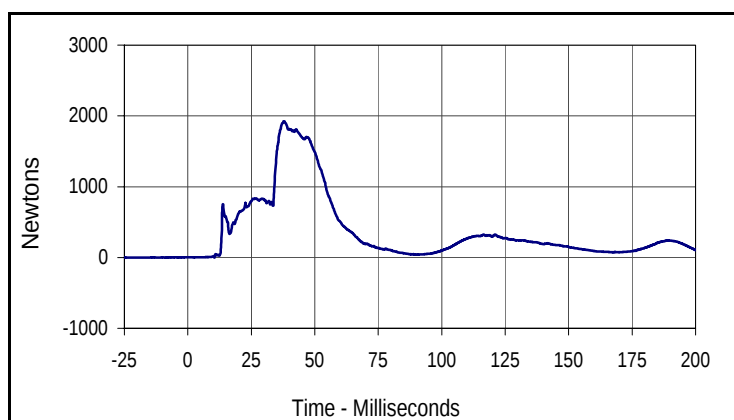

Curve Description			
Driver Acetabulum Force on Impact Side Y			
Plot No.	Type	SAE Class	Units
010	FIL	600	Newtontons
Max	Time	Min	Time
1926.3	37.9	0.4	2.4

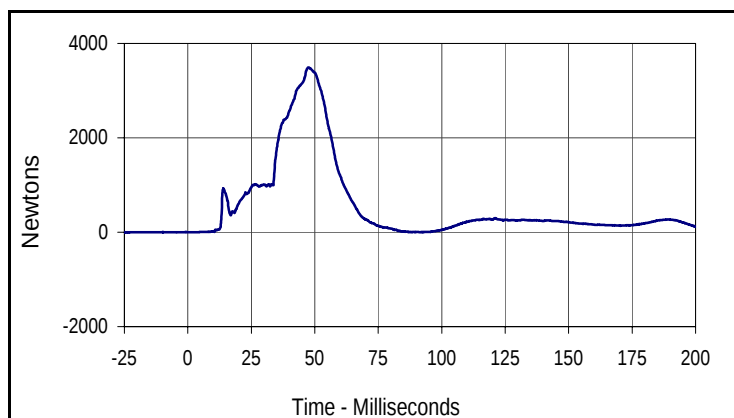

Curve Description			
Driver Total Pelvic Force on Impact Side Y			
Plot No.	Type	SAE Class	Units
011	SUM	600	Newtontons
Max	Time	Min	Time
3490.4	47.4	-0.6	88.2

APPENDIX C
DUMMY CONFIGURATION AND PERFORMANCE VERIFICATION DATA

APPENDIX C
PRE-TEST / ATD CONFIGURATION AND PERFORMANCE VERIFICATION DATA

Test Program: SID IIs External Measurements
 ATD Serial No.: 299

Test Date: 1/5/12
 Test I.D.: N/A




Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		°C	20.6 to 22.2	21.3	Pass
Laboratory Relative Humidity		%	10 to 70	31	Pass
A	Sitting Height	mm	772 - 788	777	Pass
B	Shoulder Pivot Height	mm	437 - 453	443	Pass
C	H-Point Height	mm	79 - 89	85	Pass
D	H-Point from Seatback	mm	141 - 151	146	Pass
E	Shoulder Pivot from Backline	mm	97 - 107	101	Pass
F	Thigh Clearance	mm	119 - 135	125	Pass
G	Head Breadth	mm	140 - 148	145	Pass
H	Head Back from Backline	mm	40 - 46	44	Pass
I	Head Depth	mm	178 - 188	185	Pass
J	Head Circumference	mm	541 - 551	546	Pass
K	Buttock to Knee Length	mm	514 - 540	528	Pass
L	Popliteal Height	mm	343 - 369	354	Pass
M	Knee Pivot to Floor Height	mm	392 - 409	402	Pass
N	Buttock Popliteal Length	mm	416 - 442	429	Pass
O	Chest Depth w/o Jacket	mm	195 - 211	200	Pass
P	Foot Length	mm	216 - 232	220	Pass
Q	Hip Breadth with Pelvic Plug	mm	313 - 323	318	Pass
R	Arm Length	mm	249 - 259	256	Pass
S	Knee Joint to Seatback	mm	477 - 493	485	Pass
V	Shoulder Width	mm	341 - 357	351	Pass
W	Foot Width	mm	78 - 94	92	Pass
Y	Chest Circumference with Jacket	mm	851 - 881	877	Pass
Z	Waist Circumference	mm	760 - 791	773	Pass
Overall Test Results					Pass

Test Program: SID IIs Head Drop Test
 ATD Serial No.: 299


Test Date: 1/5/12
 Test I.D.: 299HD029




Tested Parameter	Units	Specification	Result	Pass/Fail
Head Assembly Soak Time	Minutes	≥240	280	Pass
Temperature During Soak	Max	18.9 to 25.6	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	38.0	Pass
	Min		28.0	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	35.7	Pass
Peak Head Resultant Acceleration	G's	115 to 137	123.4	Pass
Peak Head X Acceleration	G's	<15	1.5	Pass
Is Acceleration Unimodal?	Yes/No	Yes	Yes	Pass
Oscillations After Main Pulse	%	<15	12.6	Pass
Overall Test Results				Pass

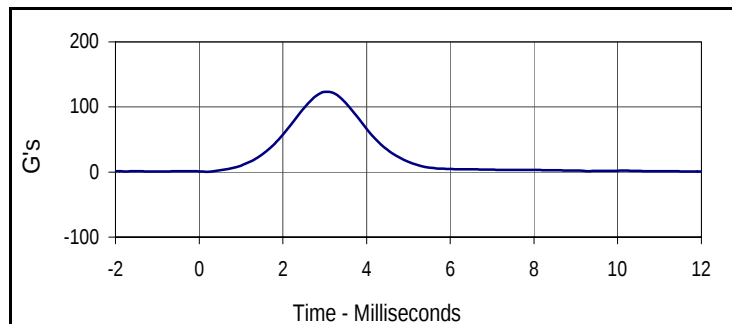


Curve Description			
Head Resultant			
Plot No.	Type	SAE Class	Units
001	RES	1000	G's
Max	Time	Min	Time
123.4	3.1	0.1	0.2

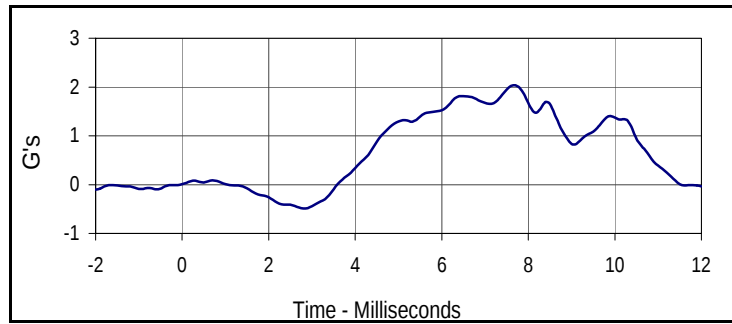

Curve Description			
Head X			
Plot No.	Type	SAE Class	Units
002	FIL	1000	G's
Max	Time	Min	Time
1.5	6.0	-0.5	2.8

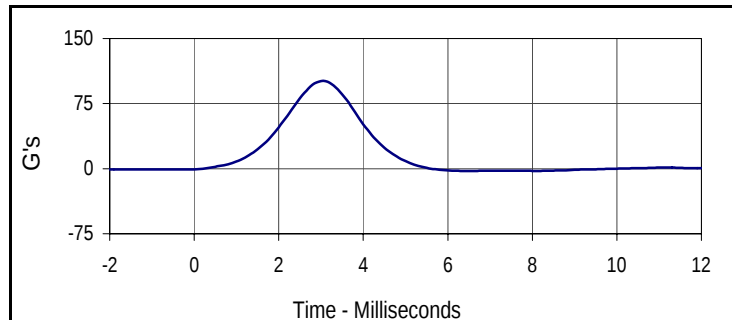

Curve Description			
Head Y			
Plot No.	Type	SAE Class	Units
003	FIL	1000	G's
Max	Time	Min	Time
101.0	3.0	-2.7	6.5

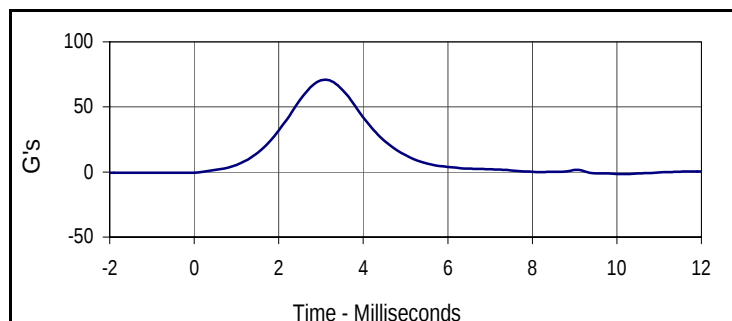


Curve Description			
Head Z			
Plot No.	Type	SAE Class	Units
004	FIL	1000	G's
Max	Time	Min	Time
71.0	3.1	-1.5	10.0

Test Program: SID IIs Neck Flexion Test
 ATD Serial No.: 299


Test Date: 1/5/12
 Test I.D.: 299NB029




Tested Parameter	Units	Specification	Result	Pass/Fail
Neck Assembly Soak Time	Minutes	≥240	310	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	38.0	Pass
	Min		29.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.5	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	34.8	Pass
Pendulum Velocity	m/s	5.51 to 5.63	5.57	Pass
Pendulum Deceleration	10 msec	-2.20 to -2.80	-2.32	Pass
	15 msec	-3.30 to -4.10	-3.54	Pass
	20 msec	-4.40 to -5.40	-4.61	Pass
	25 msec	-5.40 to -6.10	-5.42	Pass
	25-100 msec	-5.50 to -6.20	-6.05	Pass
D-Plane Rotation	Max	71 to 81	77.6	Pass
	Time	50 to 70	66.3	Pass
Peak Occipital Condyle Moment	Nm	-36 to -44	-39.4	Pass
Decaying Moment Time to Cross 0 Nm	msec	102 to 126	123.1	Pass
Overall Test Results			Pass	

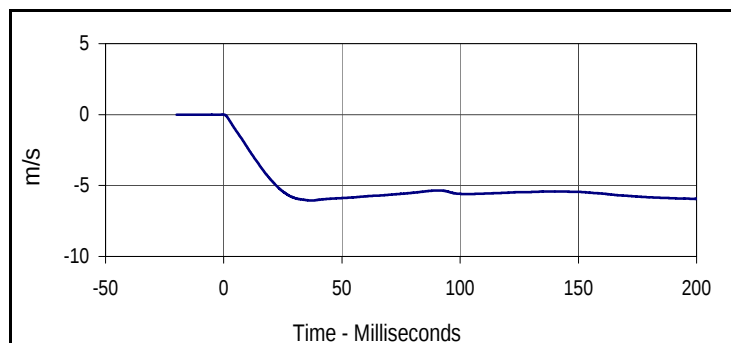

Curve Description			
Pendulum Velocity			
Plot No.	Type	SAE Class	Units
001	FIL	180	m/s
Max	Time	Min	Time
0.0	-0.5	-6.1	36.7

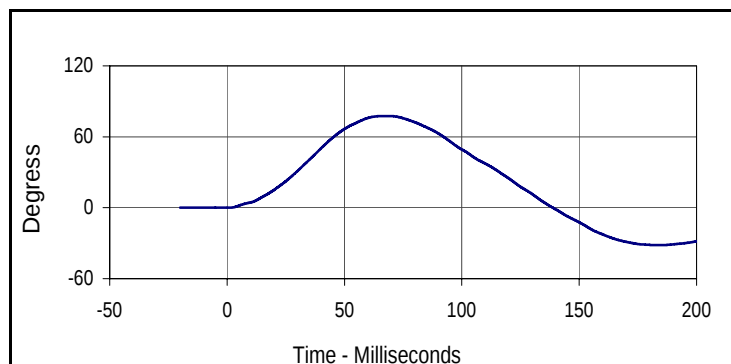

Curve Description			
Maximum Translation Rotation			
Plot No.	Type	SAE Class	Units
002	FIL	60	Degress
Max	Time	Min	Time
77.6	66.3	-31.7	183.4

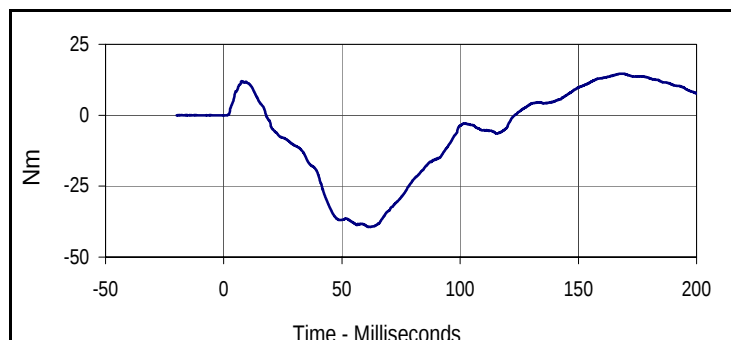


Curve Description			
Moment About Occipital Condyle			
Plot No.	Type	SAE Class	Units
003	FIL	600	Nm
Max	Time	Min	Time
14.7	168.5	-39.4	62.0

Test Program: SID IIs Shoulder Impact Test
 ATD Serial No.: 299


Test Date: 1/5/12
 Test I.D.: 299SH029




Tested Parameter		Units	Specification	Result	Pass/Fail
Dummy Soak Time		Minutes	≥180	340	Pass
Temperature During Soak	Max	°C	20.6 to 22.2	21.7	Pass
	Min	°C		20.7	Pass
Humidity During Soak	Max	%	10.0 to 70.0	38.0	Pass
	Min	%		28.0	Pass
Laboratory Temperature During Test		°C	20.6 to 22.2	21.5	Pass
Laboratory Humidity During Test		%	10.0 to 70.0	34.8	Pass
Impactor Velocity		m/s	4.20 to 4.40	4.36	Pass
Peak Shoulder Deflection		mm	28 to 37	30.3	Pass
Peak Lateral Spine Acceleration Y		G's	17 to 22	17.7	Pass
Peak Impactor Acceleration		G's	13 to 18	15.5	Pass
Overall Test Results				Pass	

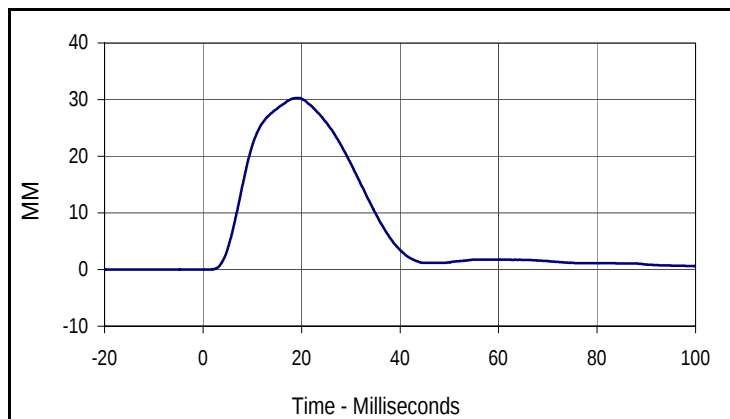

Curve Description			
Shoulder Deflection			
Plot No.	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
30.3	19.4	0.0	-7.1

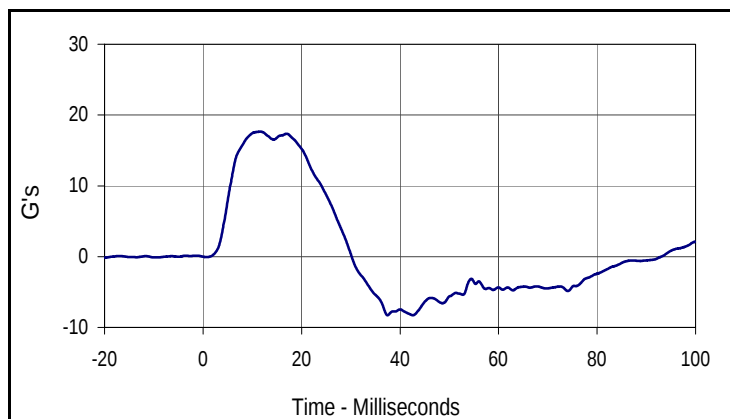

Curve Description			
Upper Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
002	FIL	180	G's
Max	Time	Min	Time
17.7	11.6	-8.3	37.5

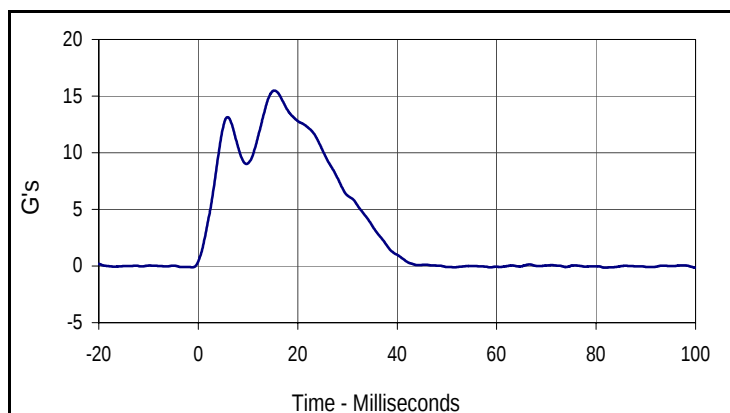


Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
15.5	15.3	-0.2	81.8

Test Program: SID IIs Thorax with Arm Impact Test
 ATD Serial No.: 299


Test Date: 1/5/12
 Test I.D.: 299TWA029




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥180	360	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	38.0	Pass
	Min		28.0	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.6	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	34.2	Pass
Impactor Velocity	m/s	6.6 to 6.8	6.7	Pass
Peak Shoulder Deflection	mm	31 to 40	36.4	Pass
Peak Upper Thorax Rib Deflection	mm	25 to 32	26.8	Pass
Peak Middle Thorax Rib Deflection	mm	30 to 36	31.0	Pass
Peak Lower Thorax Rib Deflection	mm	32 to 38	32.9	Pass
Peak Upper Spine Y Acceleration	G's	34 to 43	37.8	Pass
Peak Lower Spine Y Acceleration	G's	29 to 37	32.9	Pass
Peak Impactor Acceleration	G's	30 to 36	32.5	Pass
Overall Test Results			Pass	

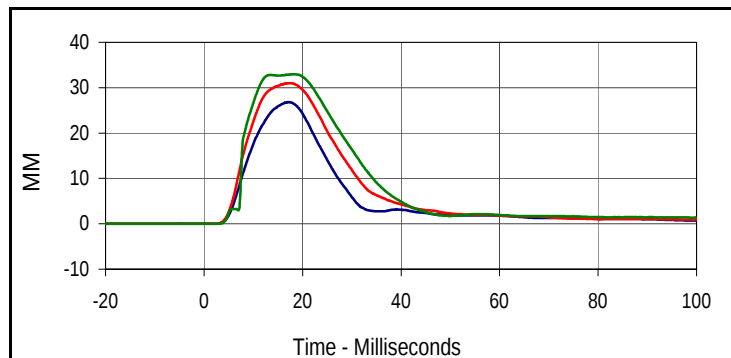

Curve Description			
Upper Thorax Deflection			
Plot No.	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
26.8	17.2	0.0	-12.8
Middle Thorax Deflection			
Max	Time	Min	Time
31.0	17.4	0.0	-3.0
Lower Thorax Deflection			
Max	Time	Min	Time
32.9	18.4	0.0	-17.7

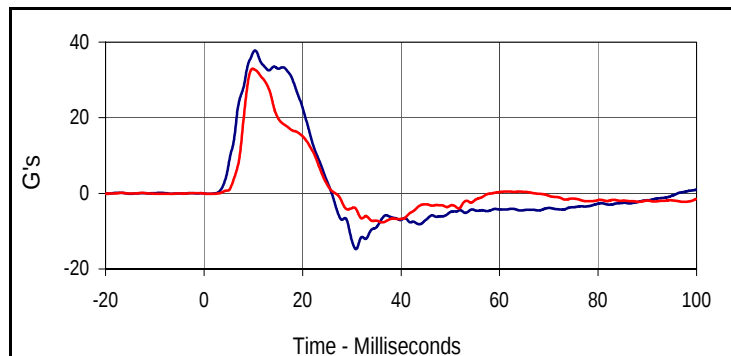


Curve Description			
Upper Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
004	FIL	180	G's
Max	Time	Min	Time
37.8	10.4	-14.8	30.8
Lower Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
005	FIL	180	G's
Max	Time	Min	Time
32.9	9.9	-7.7	36.2

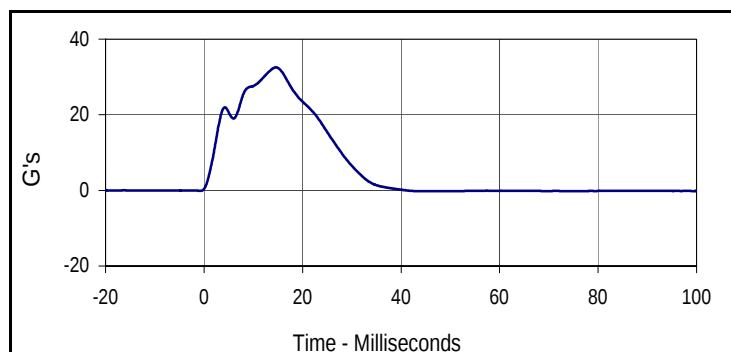

Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
006	FIL	180	G's
Max	Time	Min	Time
32.5	14.6	-0.2	50.4

Test Program: SID IIs Thorax with Arm Impact Test
 ATD Serial No.: 299

Test Date: 1/5/12
 Test I.D.: 299TWA029

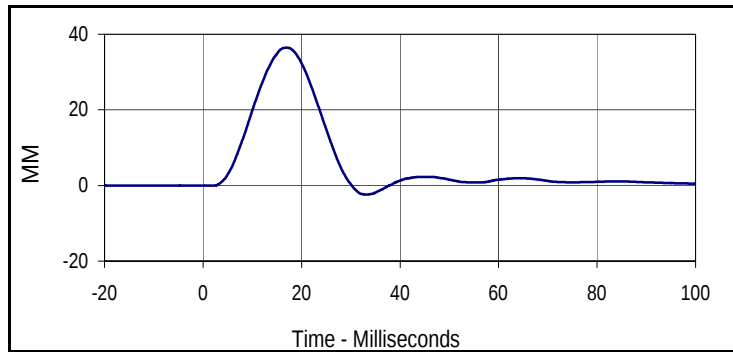


Curve Description			
Shoulder Deflection			
Plot No.	Type	SAE Class	Units
007	FIL	600	MM
Max	Time	Min	Time
36.4	16.9	-2.4	33.2

Test Program: SID IIs Thorax without Arm Impact Test
 ATD Serial No.: 299


Test Date: 1/5/12
 Test I.D.: 299TWOA029




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥180	400	Pass
Temperature During Soak	Max	18.9 to 25.6	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	38.0	Pass
	Min		28.0	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.4	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	36.8	Pass
Impactor Velocity	m/s	4.2 to 4.4	4.4	Pass
Peak Upper Thorax Rib Deflection	mm	32 to 40	34.8	Pass
Peak Middle Thorax Rib Deflection	mm	39 to 45	40.5	Pass
Peak Lower Thorax Rib Deflection	mm	35 to 43	39.2	Pass
Peak Upper Spine Y Acceleration	G's	13 to 17	14.6	Pass
Peak Lower Spine Y Acceleration	G's	7 to 11	10.9	Pass
Peak Impactor Acceleration	G's	14 to 18	17.1	Pass
Overall Test Results			Pass	

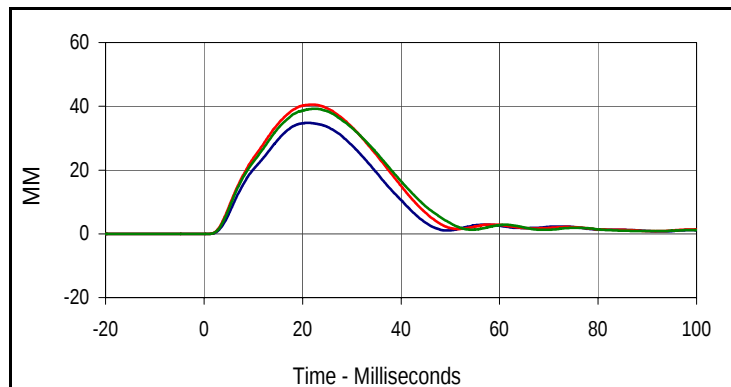

Curve Description			
Upper Thorax Deflection			
Plot No.	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
34.8	21.2	0.0	-2.4
Middle Thorax Deflection			
Max	Time	Min	Time
40.5	21.9	0.0	-6.2
Lower Thorax Deflection			
Max	Time	Min	Time
39.2	22.5	0.0	-18.7

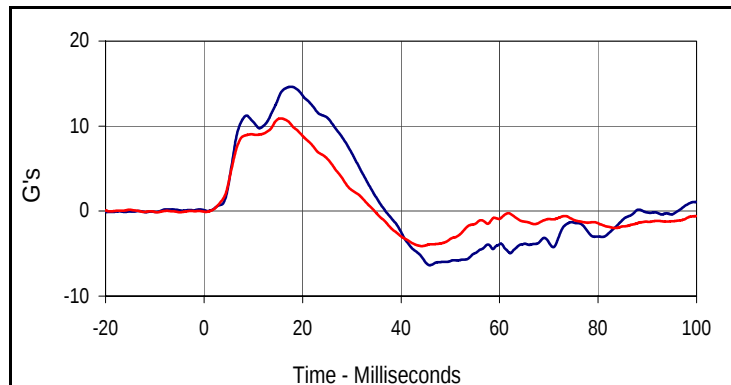

Curve Description			
Upper Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
004	FIL	180	G's
Max	Time	Min	Time
14.6	17.7	-6.4	45.8
Lower Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
005	FIL	180	G's
Max	Time	Min	Time
10.9	15.6	-4.1	44.2

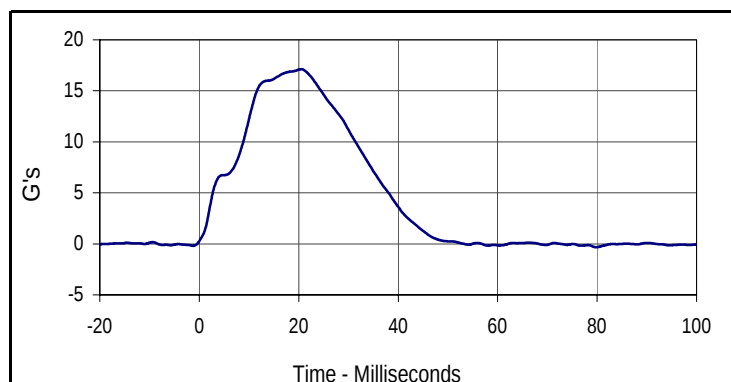


Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
006	FIL	180	G's
Max	Time	Min	Time
17.1	20.5	-0.3	79.8

Test Program: SID IIs Abdomen Impact Test
 ATD Serial No.: 299


Test Date: 1/5/12
 Test I.D.: 299ABD029




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥180	410	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	38.0	Pass
	Min		28.0	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.5	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	32.8	Pass
Impactor Velocity	m/s	4.2 to 4.4	4.3	Pass
Peak Upper Abdominal Rib Deflection	mm	36 to 47	42.0	Pass
Peak Lower Abdominal Rib Deflection	mm	33 to 44	38.8	Pass
Peak Lower Spine Y Acceleration	G's	9 to 14	11.1	Pass
Peak Impactor Acceleration	G's	12 to 16	14.9	Pass
Overall Test Results			Pass	

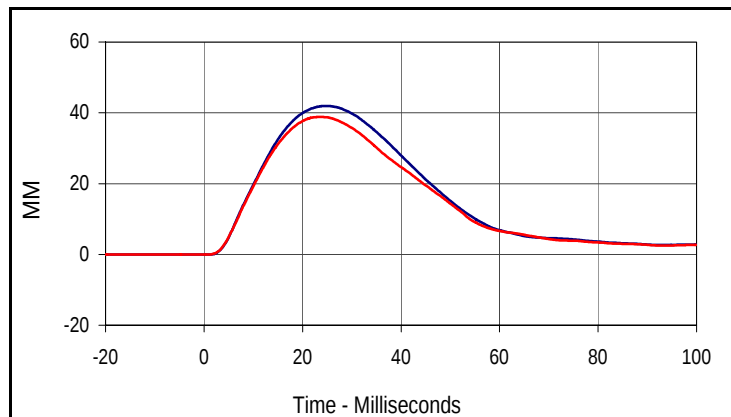

Curve Description			
Upper Abdominal Rib Deflection			
Plot No.	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
42.0	24.5	0.0	-8.4
Curve Description			
Lower Abdominal Rib Deflection			
Plot No.	Type	SAE Class	Units
002	FIL	600	MM
Max	Time	Min	Time
38.8	23.6	0.0	-10.0

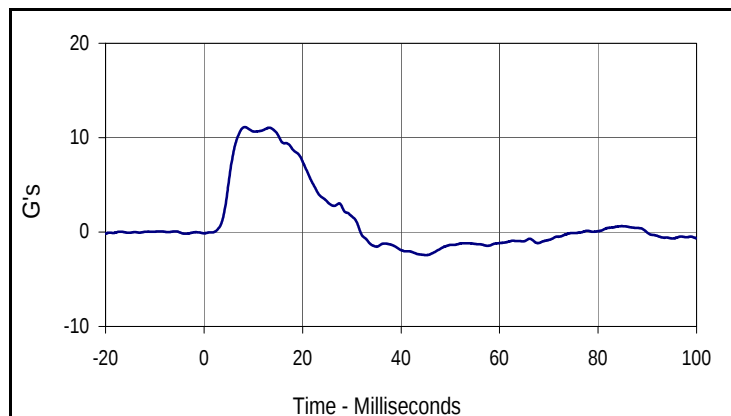


Curve Description			
Lower Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
11.1	8.2	-2.4	45.1

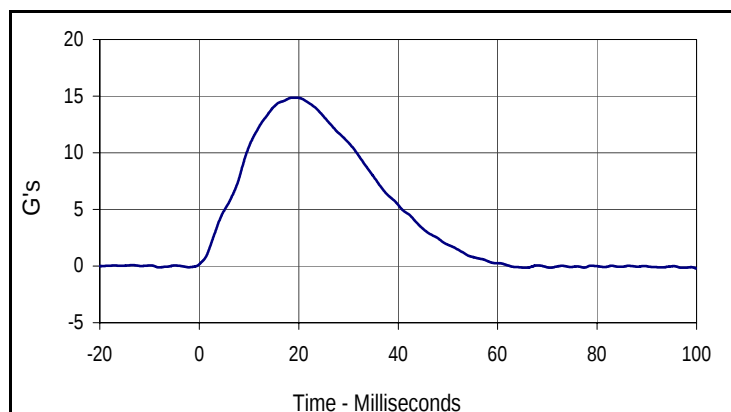

Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
004	FIL	180	G's
Max	Time	Min	Time
14.9	19.5	-0.2	99.9

Resultant Data - SIDIIs Plug Compression

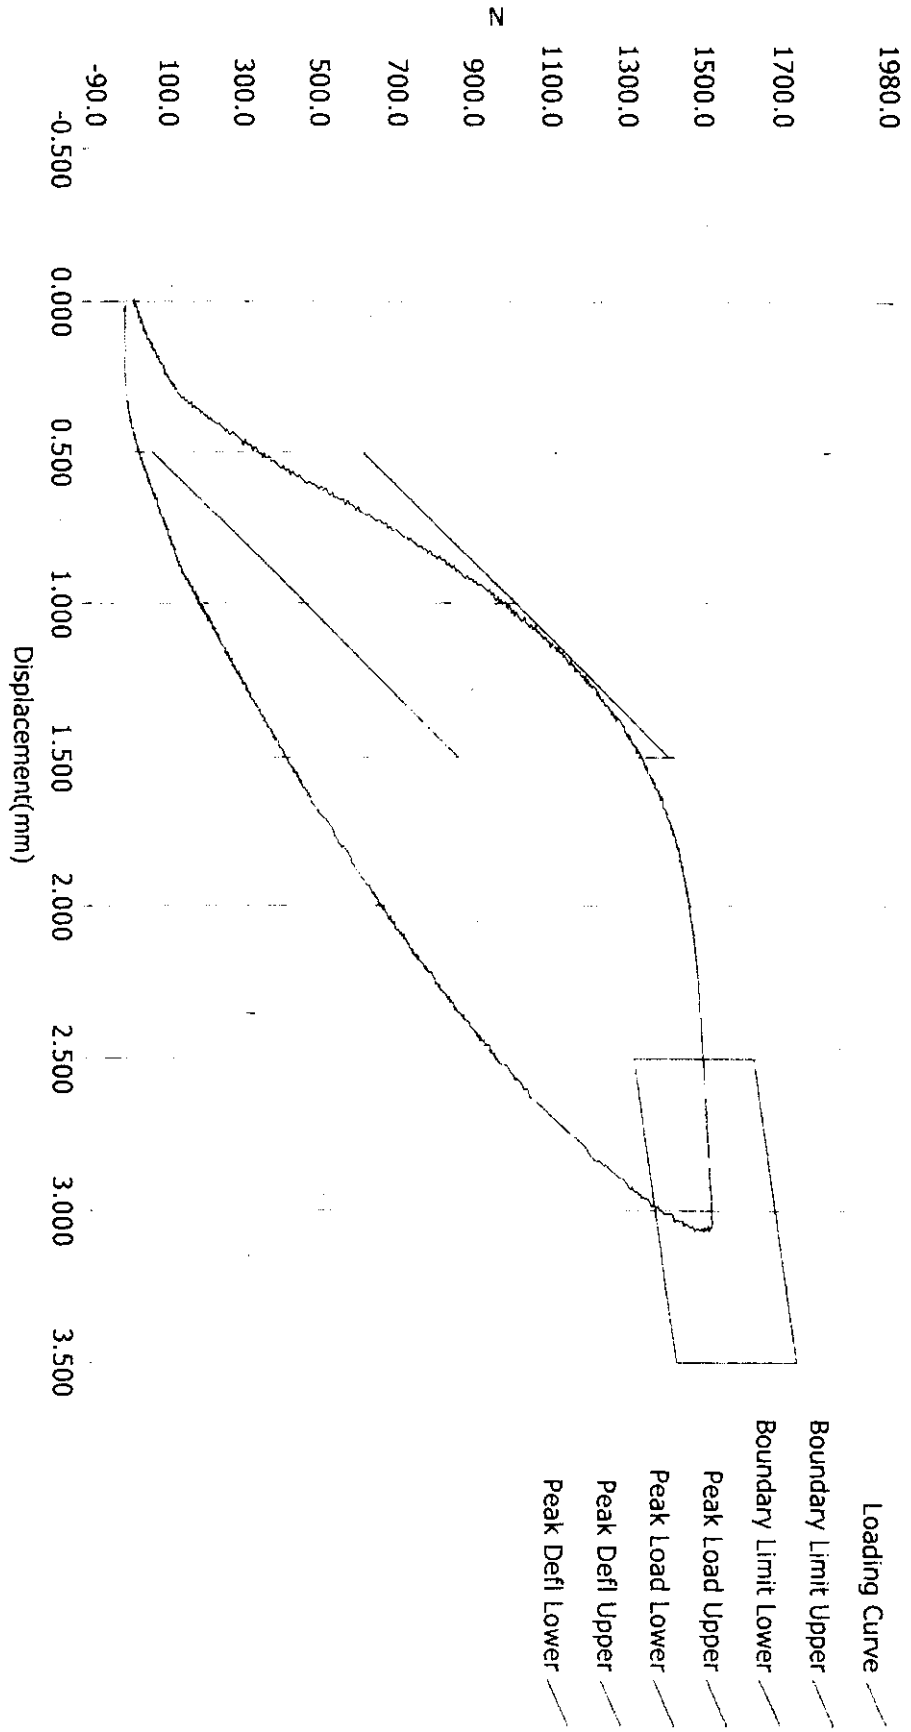

ATD Calibration Lab


<u>Test ID</u>	<u>Part Serial Number</u>	<u>Test Date</u>	<u>Test Time</u>
<u>Cert ID</u>	<u>ATD Serial Number</u>	<u>ATD Type</u>	
	36266	SIDIIs	

Test Program: SID IIs Pelvis Acetabulum Impact Test
 ATD Serial No.: 299


Test Date: 1/5/12
 Test I.D.: 299ACET029




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥180	440	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	38.0	Pass
	Min		28.0	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.6	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	31.4	Pass
Impactor Velocity	m/s	6.6 to 6.8	6.7	Pass
Peak Acetabulum Force Y	Newtons	3600 to 4300	3786.5	Pass
Peak Pelvis Y Acceleration After 6 msec.	G's	34 to 42	40.6	Pass
Peak Impactor Acceleration	G's	38 to 47	46.9	Pass
Overall Test Results			Pass	

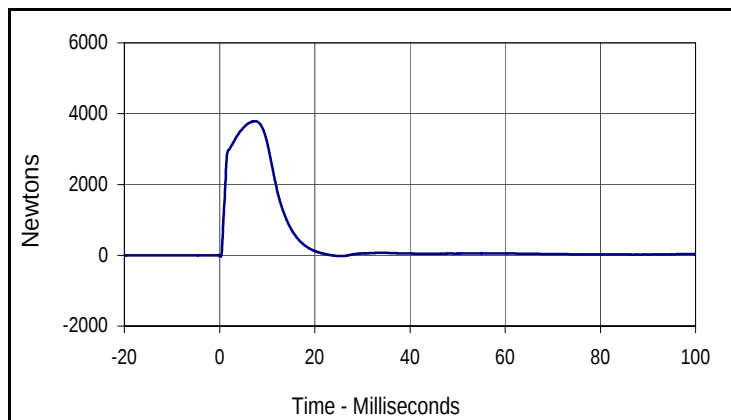

Curve Description			
Pelvis Acetabulum Force			
Plot No.	Type	SAE Class	Units
001	FIL	600	Newtons
Max	Time	Min	Time
3786.5	7.4	-36.8	0.2

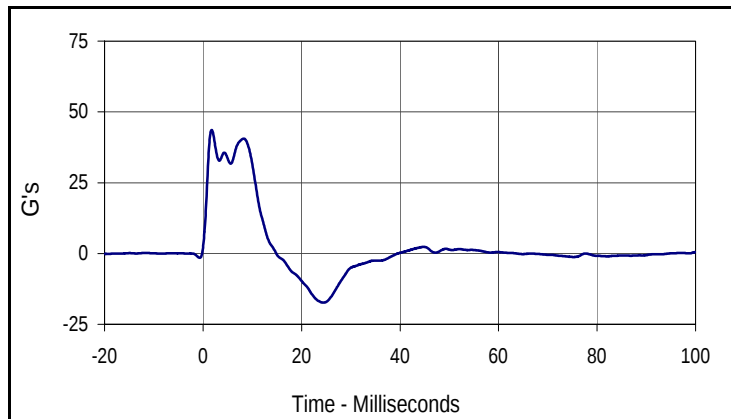

Curve Description			
Pelvis Y Acceleration			
Plot No.	Type	SAE Class	Units
002	FIL	180	G's
Max	Time	Min	Time
43.6	1.8	-17.4	24.4

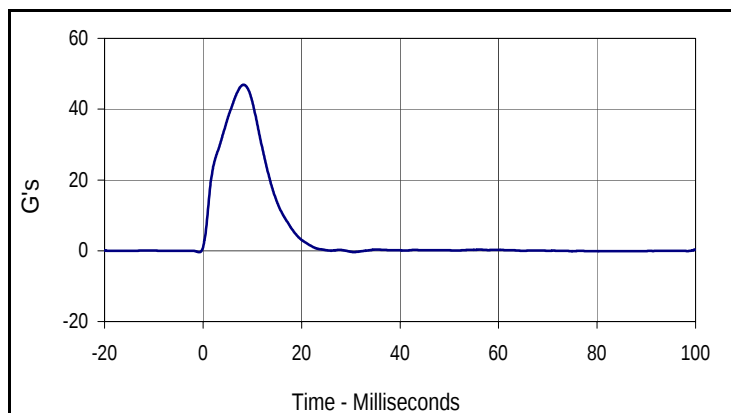


Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
46.9	8.2	-0.4	-0.7

Test Program: SID IIs Pelvis Iliac Calibration
 ATD Serial No.: 299

Test Date: 1/5/12
 Test I.D.: 299PL029




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥180	450	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	38.0	Pass
	Min		28.0	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	33.9	Pass
Impactor Velocity	m/s	4.2 to 4.4	4.3	Pass
Peak Iliac Force	Newtons	4100 to 5100	4384.7	Pass
Peak Pelvis Y Acceleration	G's	28 to 39	30.1	Pass
Peak Impactor Acceleration	G's	36 to 45	40.5	Pass
Overall Test Results			Pass	

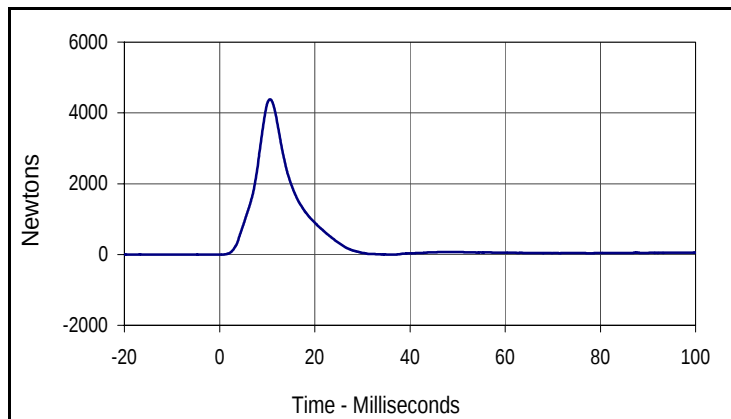

Curve Description

Pelvis Iliac Force


Plot No.	Type	SAE Class	Units
001	FIL	600	Newtons
Max	Time	Min	Time
4384.7	10.6	-4.8	36.4

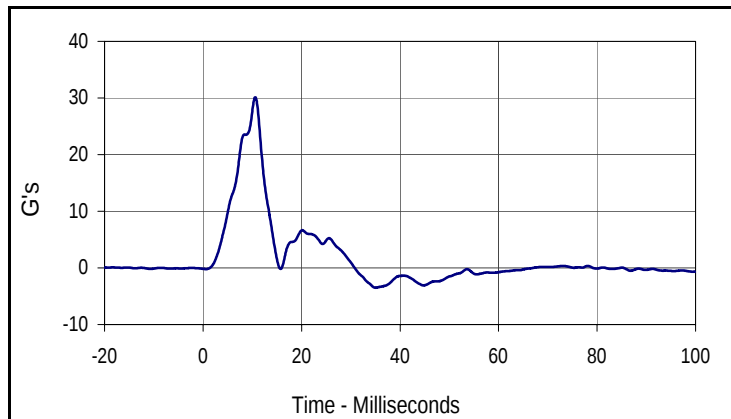

Curve Description

Pelvis Y Acceleration

Plot No.	Type	SAE Class	Units
002	FIL	180	G's
Max	Time	Min	Time
30.1	10.6	-3.5	35.0

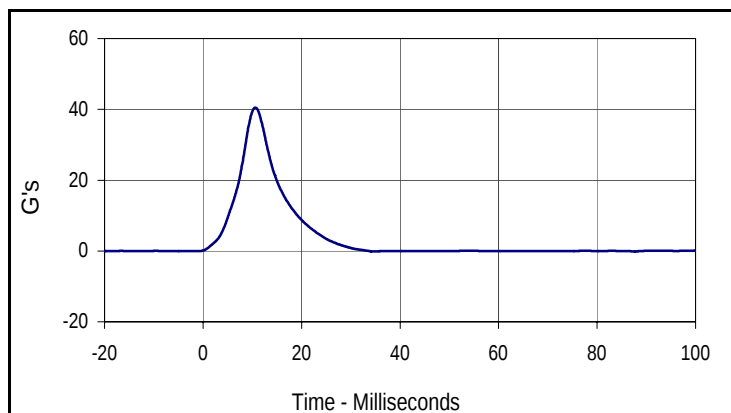

Curve Description

Impactor Acceleration

Plot No.	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
40.5	10.6	-0.2	87.6

APPENDIX C
POST-TEST / ATD CONFIGURATION AND PERFORMANCE VERIFICATION DATA

Test Program: SID IIs External Measurements
 ATD Serial No.: 299

Test Date: 1/25/12
 Test I.D.: N/A




Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		°C	20.6 to 22.2	21.2	Pass
Laboratory Relative Humidity		%	10 to 70	34	Pass
A	Sitting Height	mm	772 - 788	778	Pass
B	Shoulder Pivot Height	mm	437 - 453	445	Pass
C	H-Point Height	mm	79 - 89	84	Pass
D	H-Point from Seatback	mm	141 - 151	146	Pass
E	Shoulder Pivot from Backline	mm	97 - 107	101	Pass
F	Thigh Clearance	mm	119 - 135	126	Pass
G	Head Breadth	mm	140 - 148	145	Pass
H	Head Back from Backline	mm	40 - 46	44	Pass
I	Head Depth	mm	178 - 188	185	Pass
J	Head Circumference	mm	541 - 551	546	Pass
K	Buttock to Knee Length	mm	514 - 540	528	Pass
L	Popliteal Height	mm	343 - 369	355	Pass
M	Knee Pivot to Floor Height	mm	392 - 409	402	Pass
N	Buttock Popliteal Length	mm	416 - 442	429	Pass
O	Chest Depth w/o Jacket	mm	195 - 211	200	Pass
P	Foot Length	mm	216 - 232	220	Pass
Q	Hip Breadth with Pelvic Plug	mm	313 - 323	318	Pass
R	Arm Length	mm	249 - 259	256	Pass
S	Knee Joint to Seatback	mm	477 - 493	485	Pass
V	Shoulder Width	mm	341 - 357	351	Pass
W	Foot Width	mm	78 - 94	92	Pass
Y	Chest Circumference with Jacket	mm	851 - 881	877	Pass
Z	Waist Circumference	mm	760 - 791	773	Pass
Overall Test Results					Pass

Test Program: SID IIs Head Drop Test
 ATD Serial No.: 299


Test Date: 1/25/12
 Test I.D.: 299HD030




Tested Parameter	Units	Specification	Result	Pass/Fail
Head Assembly Soak Time	Minutes	≥240	290	Pass
Temperature During Soak	Max	18.9 to 25.6	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	35.0	Pass
	Min		29.0	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.3	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	34.5	Pass
Peak Head Resultant Acceleration	G's	115 to 137	123.2	Pass
Peak Head X Acceleration	G's	<15	2.6	Pass
Is Acceleration Unimodal?	Yes/No	Yes	Yes	Pass
Oscillations After Main Pulse	%	<15	10.4	Pass
Overall Test Results				Pass

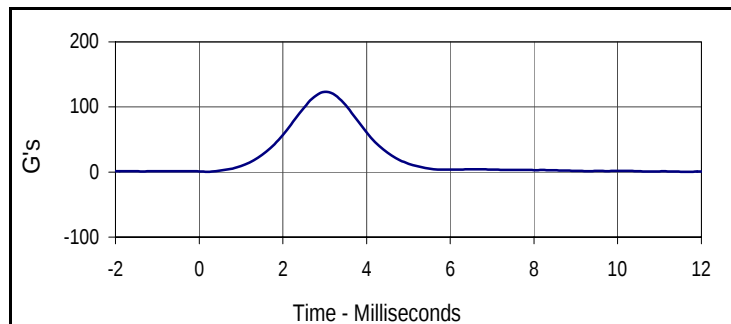


Curve Description			
Head Resultant			
Plot No.	Type	SAE Class	Units
001	RES	1000	G's
Max	Time	Min	Time
123.2	3.0	0.4	0.2

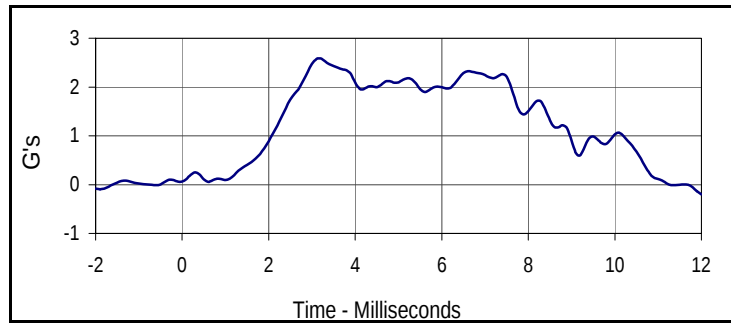

Curve Description			
Head X			
Plot No.	Type	SAE Class	Units
002	FIL	1000	G's
Max	Time	Min	Time
2.6	3.2	-0.1	-1.9

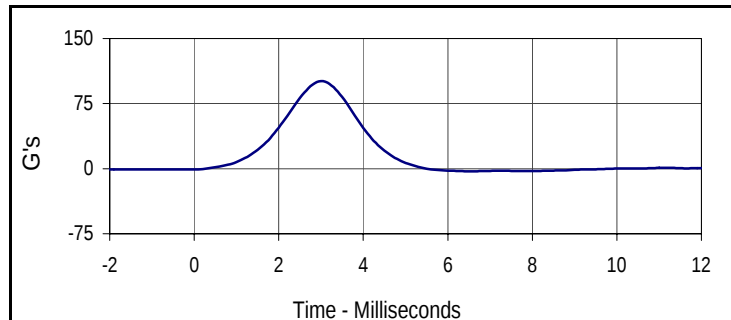

Curve Description			
Head Y			
Plot No.	Type	SAE Class	Units
003	FIL	1000	G's
Max	Time	Min	Time
100.8	3.0	-3.0	6.5

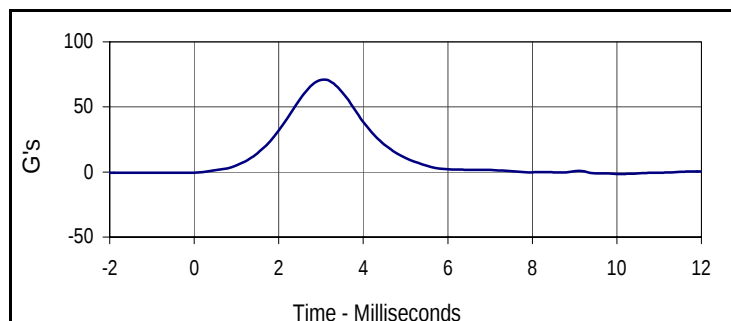


Curve Description			
Head Z			
Plot No.	Type	SAE Class	Units
004	FIL	1000	G's
Max	Time	Min	Time
70.9	3.1	-1.5	10.0

Test Program: SID IIs Neck Flexion Test
 ATD Serial No.: 299


Test Date: 1/25/12
 Test I.D.: 299NB030




Tested Parameter	Units	Specification	Result	Pass/Fail
Neck Assembly Soak Time	Minutes	≥240	320	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	35.0	Pass
	Min		29.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.4	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	32.7	Pass
Pendulum Velocity	m/s	5.51 to 5.63	5.59	Pass
Pendulum Deceleration	10 msec	-2.20 to -2.80	-2.46	Pass
	15 msec	-3.30 to -4.10	-3.65	Pass
	20 msec	-4.40 to -5.40	-4.80	Pass
	25 msec	-5.40 to -6.10	-5.61	Pass
	25-100 msec	-5.50 to -6.20	-5.91	Pass
D-Plane Rotation	Max	71 to 81	78.1	Pass
	Time	50 to 70	65.7	Pass
Peak Occipital Condyle Moment	Nm	-36 to -44	-39.3	Pass
Decaying Moment Time to Cross 0 Nm	msec	102 to 126	121.1	Pass
Overall Test Results			Pass	

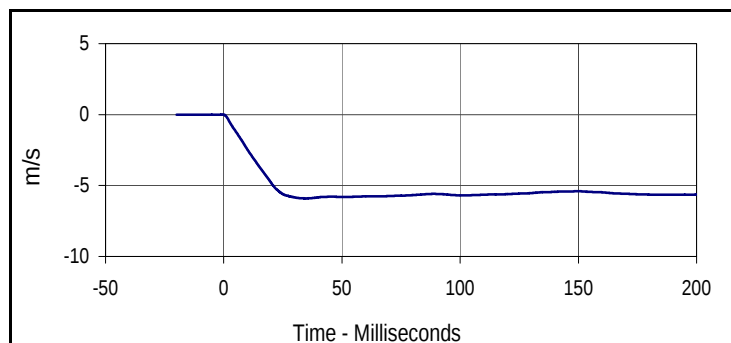

Curve Description			
Pendulum Velocity			
Plot No.	Type	SAE Class	Units
001	FIL	180	m/s
Max	Time	Min	Time
0.0	-0.6	-5.9	34.7

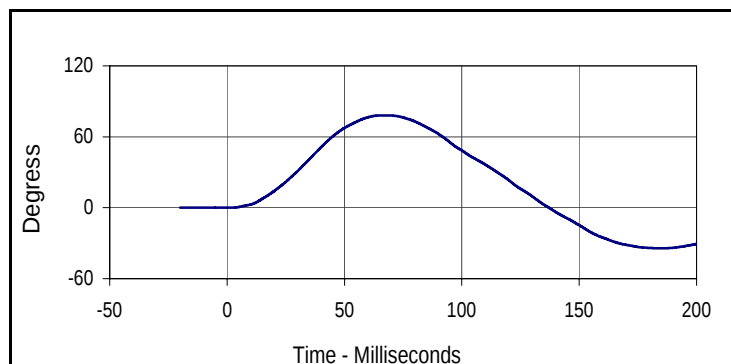

Curve Description			
Maximum Translation Rotation			
Plot No.	Type	SAE Class	Units
002	FIL	60	Degress
Max	Time	Min	Time
78.1	65.7	-34.3	184.7

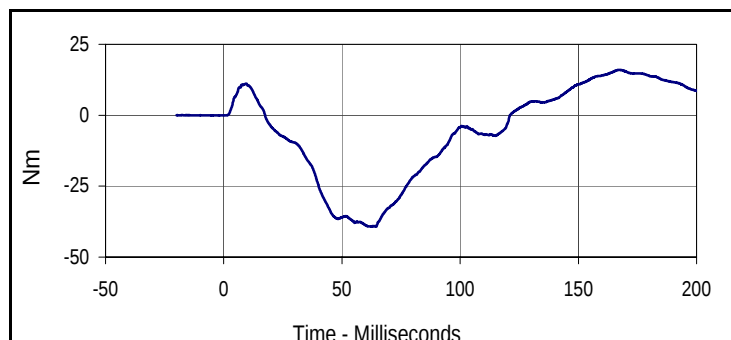


Curve Description			
Moment About Occipital Condyle			
Plot No.	Type	SAE Class	Units
003	FIL	600	Nm
Max	Time	Min	Time
16.0	167.2	-39.3	64.4

Test Program: SID IIs Shoulder Impact Test
 ATD Serial No.: 299


Test Date: 1/25/12
 Test I.D.: 299SH030




Tested Parameter		Units	Specification	Result	Pass/Fail
Dummy Soak Time		Minutes	≥180	350	Pass
Temperature During Soak	Max	°C	20.6 to 22.2	21.7	Pass
	Min	°C		20.7	Pass
Humidity During Soak	Max	%	10.0 to 70.0	35.0	Pass
	Min	%		29.0	Pass
Laboratory Temperature During Test		°C	20.6 to 22.2	21.3	Pass
Laboratory Humidity During Test		%	10.0 to 70.0	33.7	Pass
Impactor Velocity		m/s	4.20 to 4.40	4.35	Pass
Peak Shoulder Deflection		mm	28 to 37	30.9	Pass
Peak Lateral Spine Acceleration Y		G's	17 to 22	18.3	Pass
Peak Impactor Acceleration		G's	13 to 18	16.2	Pass
Overall Test Results				Pass	

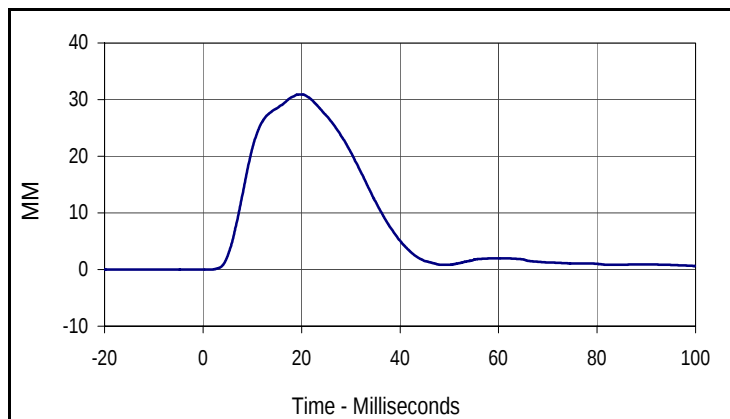

Curve Description			
Shoulder Deflection			
Plot No.	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
30.9	19.6	0.0	-2.6

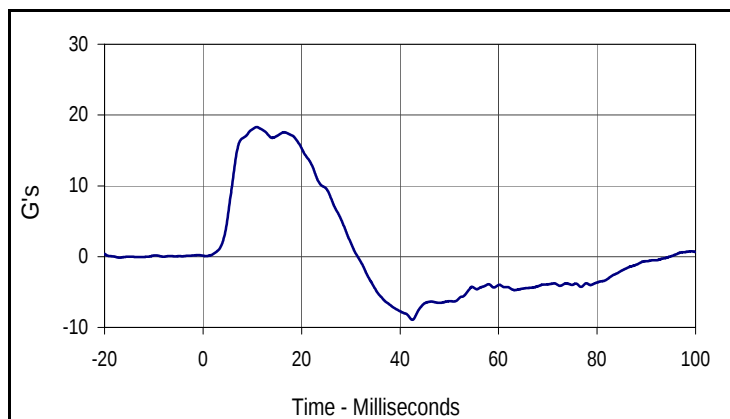

Curve Description			
Upper Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
002	FIL	180	G's
Max	Time	Min	Time
18.3	10.9	-8.9	42.5

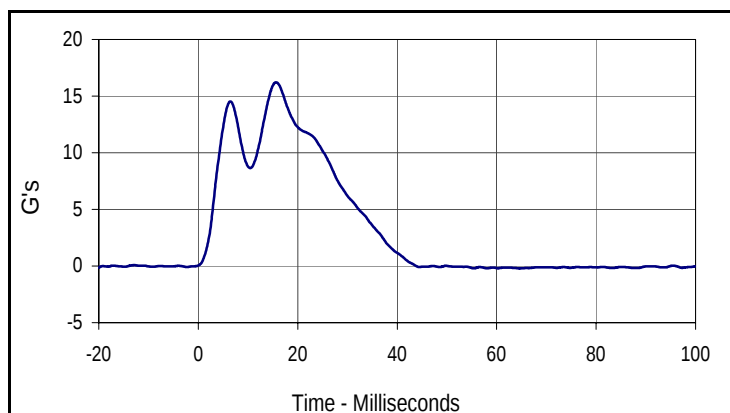


Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
16.2	15.6	-0.2	64.7

Test Program: SID IIs Thorax with Arm Impact Test
 ATD Serial No.: 299


Test Date: 1/25/12
 Test I.D.: 299TWA030




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥180	360	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	35.0	Pass
	Min		29.0	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	31.4	Pass
Impactor Velocity	m/s	6.6 to 6.8	6.7	Pass
Peak Shoulder Deflection	mm	31 to 40	36.9	Pass
Peak Upper Thorax Rib Deflection	mm	25 to 32	29.4	Pass
Peak Middle Thorax Rib Deflection	mm	30 to 36	33.1	Pass
Peak Lower Thorax Rib Deflection	mm	32 to 38	34.2	Pass
Peak Upper Spine Y Acceleration	G's	34 to 43	37.6	Pass
Peak Lower Spine Y Acceleration	G's	29 to 37	33.2	Pass
Peak Impactor Acceleration	G's	30 to 36	33.4	Pass
Overall Test Results			Pass	

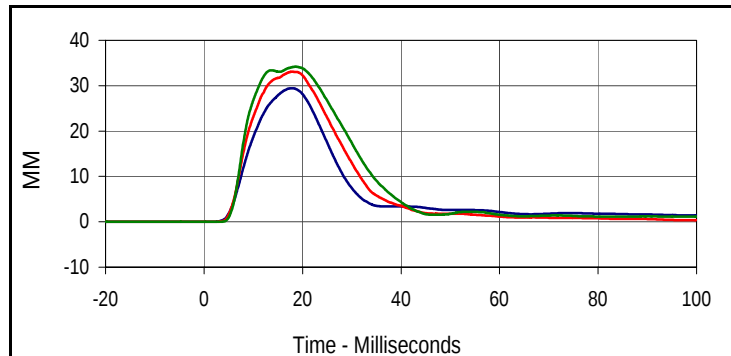

Curve Description			
Upper Thorax Deflection			
Plot No.	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
29.4	17.8	0.0	-19.0
Middle Thorax Deflection			
Max	Time	Min	Time
33.1	17.9	0.0	-14.9
Lower Thorax Deflection			
Max	Time	Min	Time
34.2	18.6	0.0	-14.3

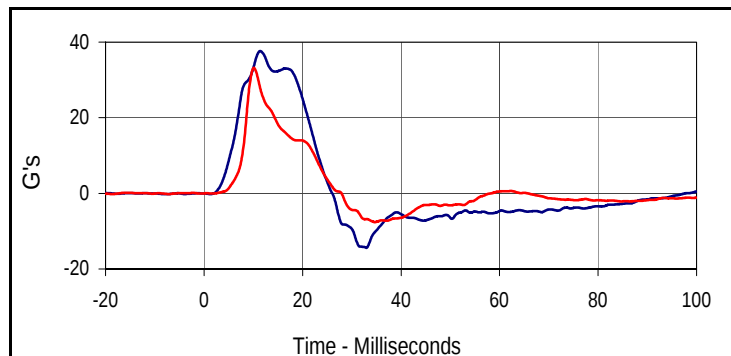


Curve Description			
Upper Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
004	FIL	180	G's
Max	Time	Min	Time
37.6	11.4	-14.4	32.9
Lower Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
005	FIL	180	G's
Max	Time	Min	Time
33.2	10.1	-7.6	34.7

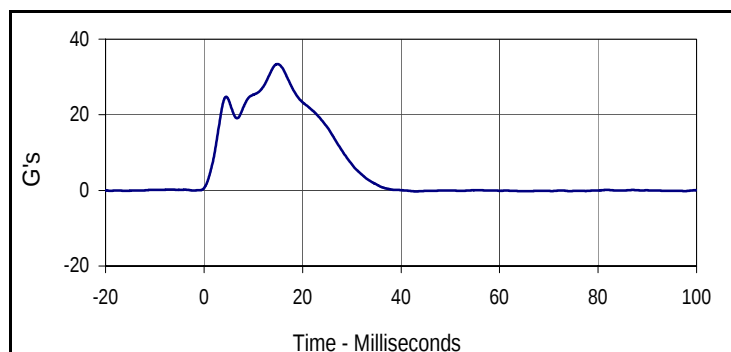

Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
006	FIL	180	G's
Max	Time	Min	Time
33.4	14.9	-0.3	43.0

Test Program: SID IIs Thorax with Arm Impact Test
 ATD Serial No.: 299

Test Date: 1/25/12
 Test I.D.: 299TWA030

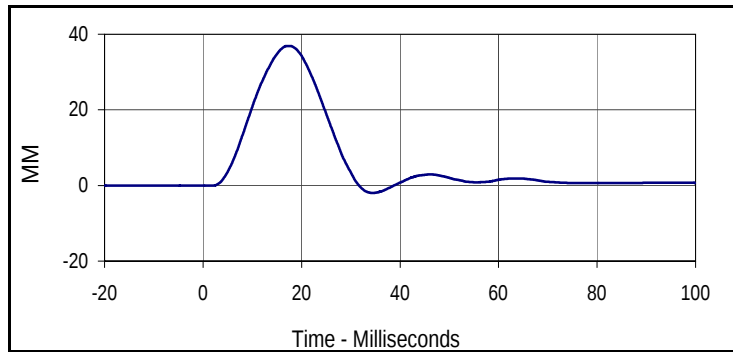


Curve Description			
Shoulder Deflection			
Plot No.	Type	SAE Class	Units
007	FIL	600	MM
Max	Time	Min	Time
36.9	17.6	-2.0	34.5

Test Program: SID IIs Thorax without Arm Impact Test
 ATD Serial No.: 299


Test Date: 1/25/12
 Test I.D.: 299TWOA030




Tested Parameter		Units	Specification	Result	Pass/Fail
Dummy Soak Time		Minutes	≥180	400	Pass
Temperature During Soak	Max	°C	18.9 to 25.6	21.7	Pass
	Min	°C		20.7	Pass
Humidity During Soak	Max	%	10.0 to 70.0	35.0	Pass
	Min	%		29.0	Pass
Laboratory Temperature During Test		°C	18.9 to 25.6	21.3	Pass
Laboratory Humidity During Test		%	10.0 to 70.0	32.9	Pass
Impactor Velocity		m/s	4.2 to 4.4	4.36	Pass
Peak Upper Thorax Rib Deflection		mm	32 to 40	35.7	Pass
Peak Middle Thorax Rib Deflection		mm	39 to 45	42.5	Pass
Peak Lower Thorax Rib Deflection		mm	35 to 43	39.9	Pass
Peak Upper Spine Y Acceleration		G's	13 to 17	15.6	Pass
Peak Lower Spine Y Acceleration		G's	7 to 11	9.4	Pass
Peak Impactor Acceleration		G's	14 to 18	16.5	Pass
Overall Test Results				Pass	

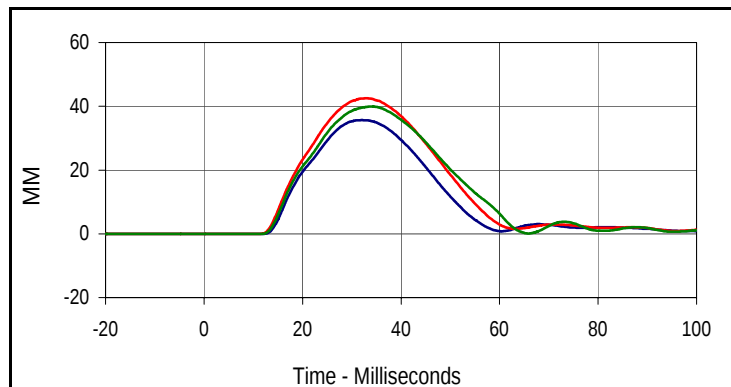

Curve Description			
Upper Thorax Deflection			
Plot No.	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
35.7	32.1	0.0	10.0
Middle Thorax Deflection			
Max	Time	Min	Time
42.5	32.9	0.0	9.6
Lower Thorax Deflection			
Max	Time	Min	Time
39.9	34.0	0.0	7.1

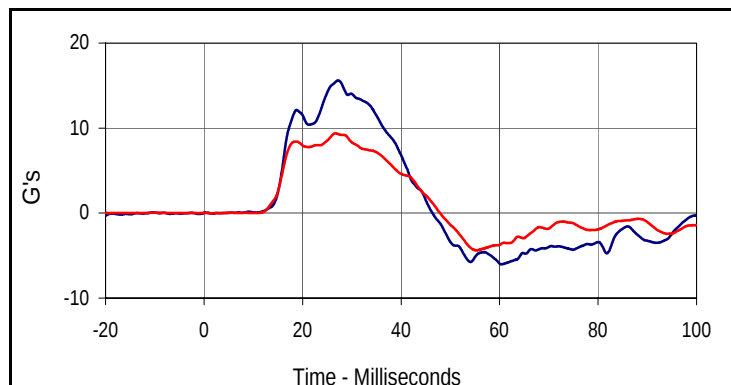

Curve Description			
Upper Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
004	FIL	180	G's
Max	Time	Min	Time
15.6	27.3	-6.0	60.4
Lower Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
005	FIL	180	G's
Max	Time	Min	Time
9.4	26.6	-4.4	55.3

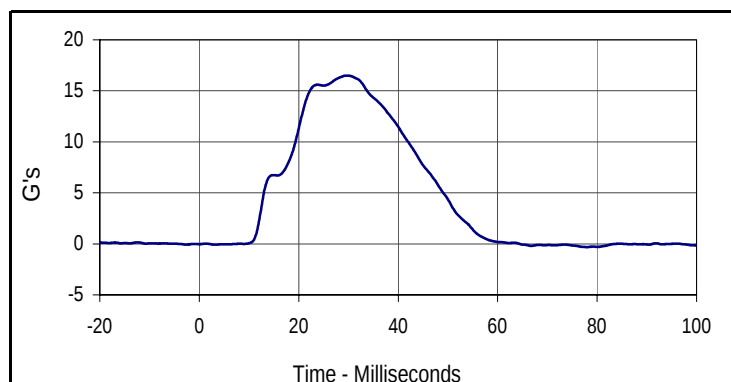


Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
006	FIL	180	G's
Max	Time	Min	Time
16.5	29.6	-0.3	77.9

Test Program: SID IIs Abdomen Impact Test
 ATD Serial No.: 299


Test Date: 1/25/12
 Test I.D.: 299ABD030




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥180	420	Pass
Temperature During Soak	Max °C	20.6 to 22.2	21.7	Pass
	Min °C		20.7	Pass
Humidity During Soak	Max %	10.0 to 70.0	35.0	Pass
	Min %		29.0	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.5	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	33.4	Pass
Impactor Velocity	m/s	4.2 to 4.4	4.3	Pass
Peak Upper Abdominal Rib Deflection	mm	36 to 47	42.2	Pass
Peak Lower Abdominal Rib Deflection	mm	33 to 44	37.3	Pass
Peak Lower Spine Y Acceleration	G's	9 to 14	11.8	Pass
Peak Impactor Acceleration	G's	12 to 16	15.5	Pass
Overall Test Results			Pass	

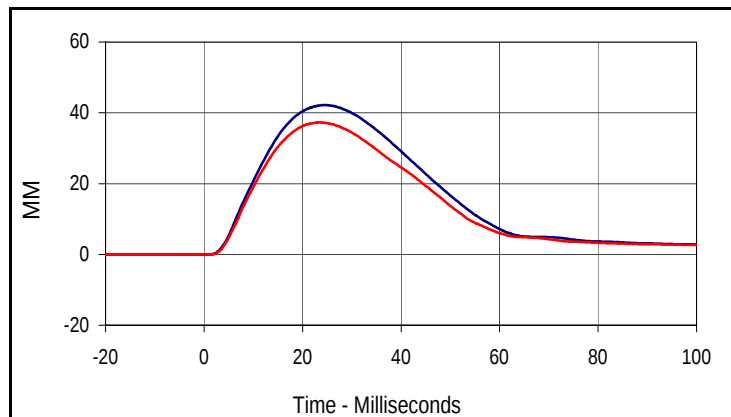

Curve Description			
Upper Abdominal Rib Deflection			
Plot No.	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
42.2	24.5	0.0	-20.0
Curve Description			
Lower Abdominal Rib Deflection			
Plot No.	Type	SAE Class	Units
002	FIL	600	MM
Max	Time	Min	Time
37.3	23.3	0.0	-18.9

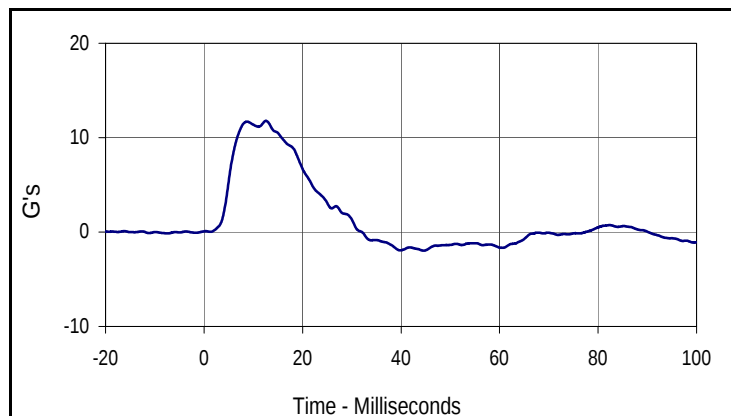


Curve Description			
Lower Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
11.8	12.6	-2.4	0.0

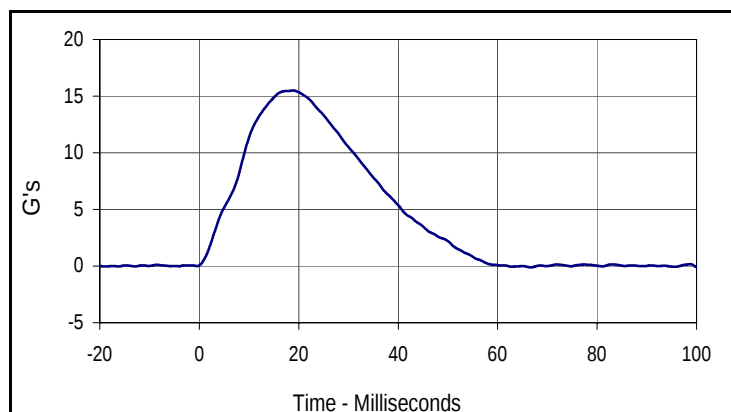

Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
004	FIL	180	G's
Max	Time	Min	Time
15.5	18.9	-0.1	66.6

MC5201 POST TEST

Resultant Data - SIDIIs Plug Compression

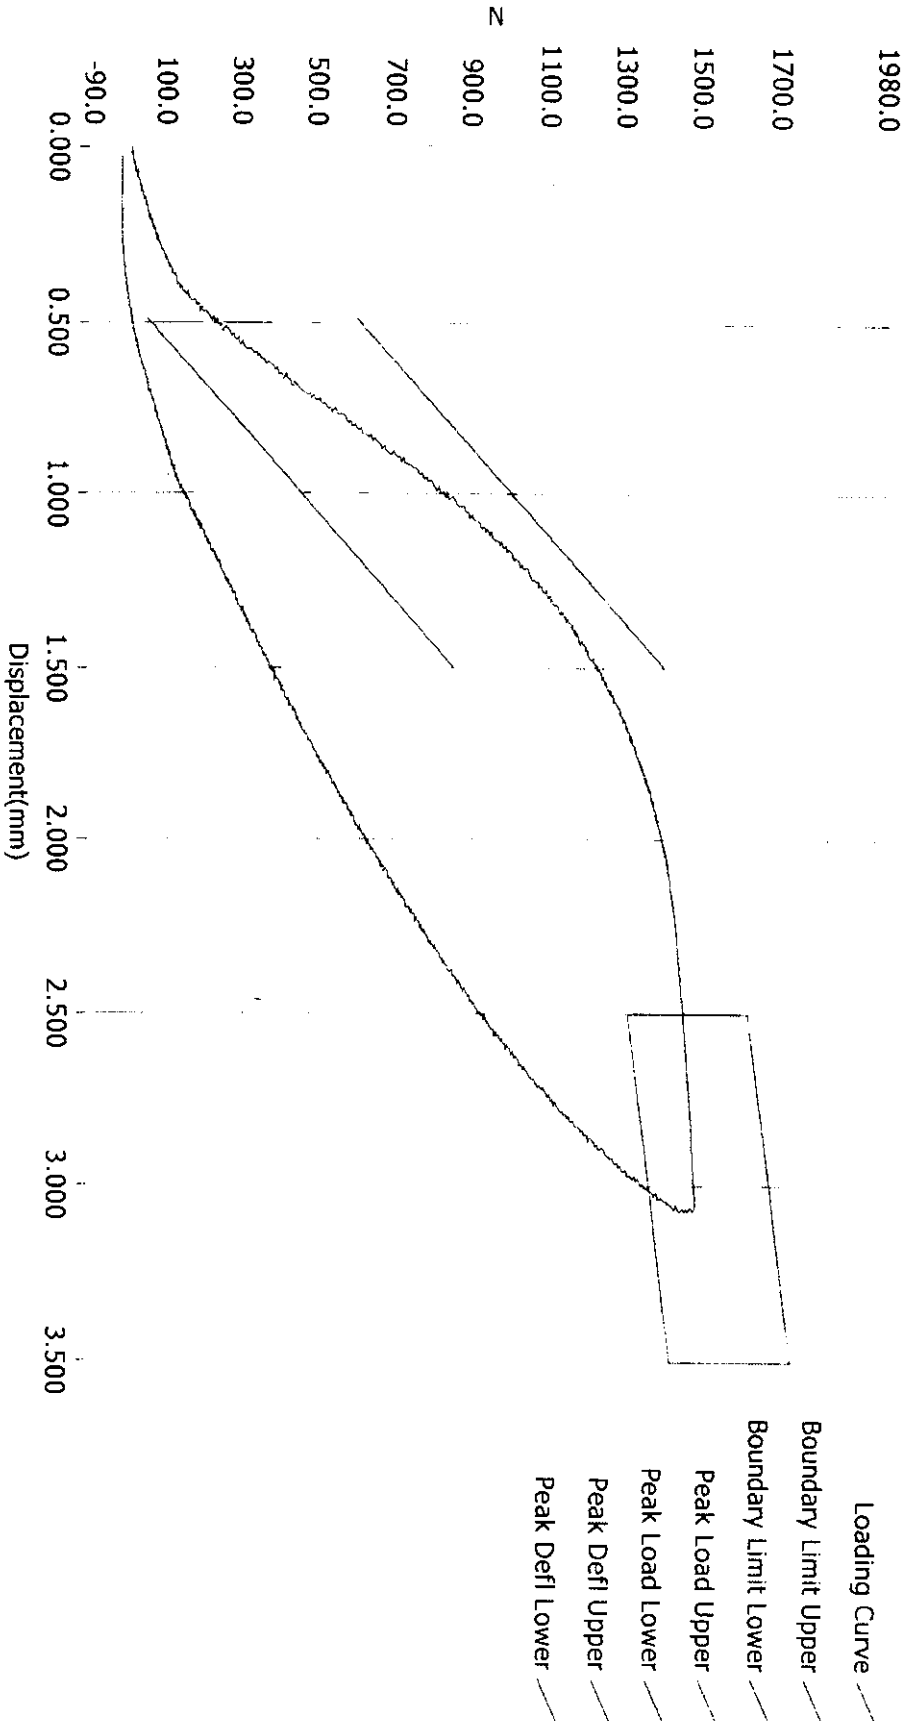

ATD Calibration Lab

<u>Test ID</u>	<u>Part Serial Number</u>	<u>Test Date</u>	<u>Test Time</u>
<u>Cert ID</u>	<u>ATD Serial Number</u>	<u>ATD Type</u>	
	36315	SIDIIs	

Current Date : 9/22/2010


Current Time : 13:04:54

Test Program: SID IIs Pelvis Acetabulum Impact Test
 ATD Serial No.: 299


Test Date: 1/25/12
 Test I.D.: 299ACET030




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥180	450	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	35.0	Pass
	Min		29.0	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.3	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	32.9	Pass
Impactor Velocity	m/s	6.6 to 6.8	6.7	Pass
Peak Acetabulum Force Y	Newtons	3600 to 4300	3809.1	Pass
Peak Pelvis Y Acceleration After 6 msec.	G's	34 to 42	37.1	Pass
Peak Impactor Acceleration	G's	38 to 47	43.4	Pass
Overall Test Results			Pass	

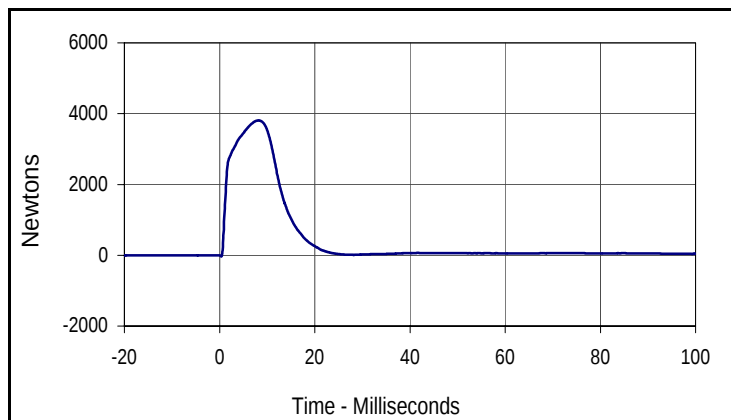

Curve Description			
Pelvis Acetabulum Force			
Plot No.	Type	SAE Class	Units
001	FIL	600	Newtons
Max	Time	Min	Time
3809.1	8.2	-33.7	0.4

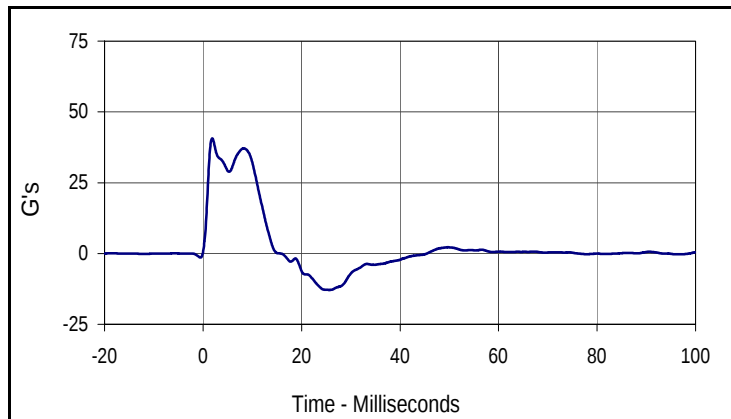

Curve Description			
Pelvis Y Acceleration			
Plot No.	Type	SAE Class	Units
002	FIL	180	G's
Max	Time	Min	Time
40.6	1.9	-12.9	25.7

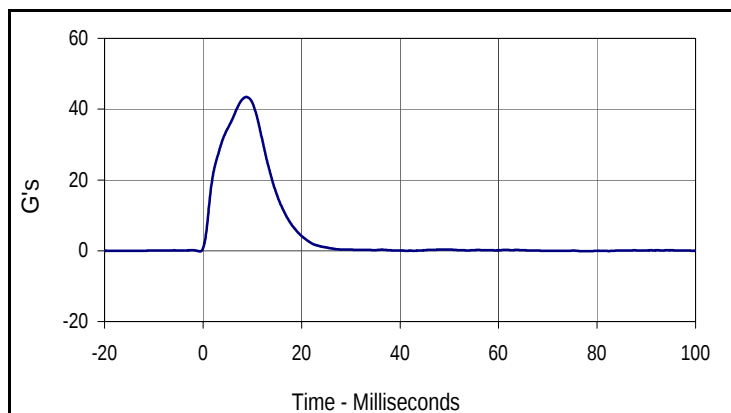


Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
43.4	8.8	-0.2	-0.6

Test Program: SID IIs Pelvis Iliac Calibration
 ATD Serial No.: 299

Test Date: 1/25/12
 Test I.D.: 299PL030




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥180	450	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	35.0	Pass
	Min		29.0	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.3	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	32.6	Pass
Impactor Velocity	m/s	4.2 to 4.4	4.3	Pass
Peak Iliac Force	Newtons	4100 to 5100	4503.5	Pass
Peak Pelvis Y Acceleration	G's	28 to 39	31.5	Pass
Peak Impactor Acceleration	G's	36 to 45	41.3	Pass
Overall Test Results			Pass	

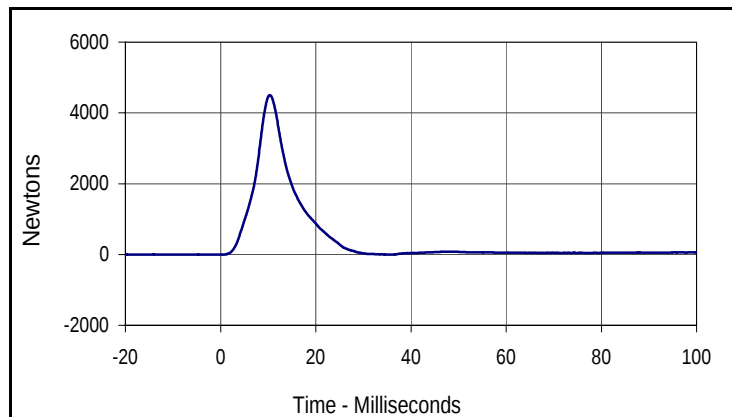

Curve Description

Pelvis Iliac Force


Plot No.	Type	SAE Class	Units
001	FIL	600	Newtons
Max	Time	Min	Time
4503.5	10.3	-2.8	35.8

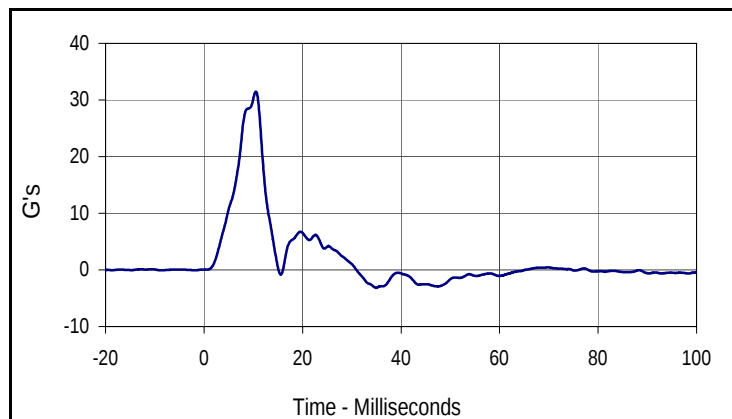

Curve Description

Pelvis Y Acceleration

Plot No.	Type	SAE Class	Units
002	FIL	180	G's
Max	Time	Min	Time
31.5	10.5	-3.2	34.9

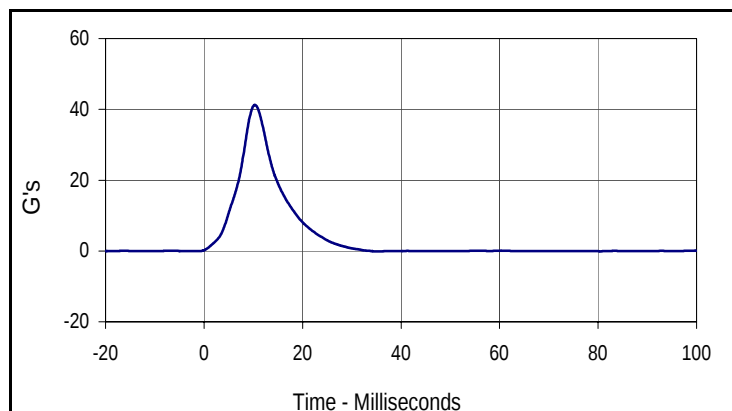

Curve Description

Impactor Acceleration

Plot No.	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
41.3	10.3	-0.1	34.9

APPENDIX D
TEST EQUIPMENT AND INSTRUMENTATION CALIBRATION DATA

TABLE 1 – Dummy Instrumentation (SID-IIs)

				SID-IIs S/N 299		
				Serial Number	Manufacturer	Calibration
Head Accelerometers			X	P51926	Endevco	8/8/11
			Y	P51929	Endevco	8/8/11
			Z	P51934	Endevco	8/8/11
Displacement Potentiometers	Shoulder		Y	1074	FTSS	8/8/11
	Thoracic Rib	Upper	Y	1143	FTSS	8/8/11
		Middle	Y	1160	FTSS	8/8/11
		Lower	Y	1213	FTSS	8/8/11
	Abdominal Rib	Upper	Y	1218	FTSS	8/8/11
		Lower	Y	1234	FTSS	8/8/11
Lower Spine Accelerometers (T12)			X	P63999	Endevco	8/5/11
			Y	P58872	Endevco	8/4/11
			Z	P58795	Endevco	8/4/11
Acetabulum Load Cell			Y	272	Denton	7/22/11
Iliac Wing Load Cell			Y	284	Denton	7/22/11
Pelvis Plug (Struck Side)				36686	FTSS	9/27/10
Pelvis Plug (Non-Struck Side)				36411	FTSS	9/23/10

TABLE 2 – Vehicle Instrumentation

Vehicle Instrumentation		Serial Number	Manufacturer	Calibration Date
Vehicle Center of Gravity	X	Ketx5a	ICSensor	6/20/11
Vehicle Center of Gravity	Y	Ketx5b	ICSensor	6/20/11
Vehicle Center of Gravity	Z	Ketx5c	ICSensor	6/20/11
Left Floor Sill	Y	EK16J	Endevco	2/3/11
A-Pillar Sill	Y	J36724	Endevco	3/30/11
A-Pillar Low	Y	BE68J	Endevco	1/6/12
A-Pillar Mid	Y	J21776	Endevco	1/11/12
B-Pillar Sill	Y	02I16-A09	Entrans	1/6/12
B-Pillar Low	Y	J36641	Endevco	4/4/11
B-Pillar Mid	Y	BF59J	Endevco	4/29/11
Driver Seat	Y	J21907	Endevco	3/30/11
Engine Top	X	BI60H	Endevco	7/22/11
Engine Top	Y	AR17	Endevco	7/22/11
Firewall	Y	BF83H	Endevco	3/31/11
Right Roof	Y	J24583	Endevco	4/1/11
Right Floor Sill	Y	BJ54H	Endevco	3/31/11
Rear Floorpan	X	Keva202x	Endevco	11/30/11
Rear Floorpan	Y	Keva202y	Endevco	11/30/11

TABLE 3 – Pole Instrumentation

	Serial Number	Manufacturer	Calibration Date
Load Cell 1	131822A	Interface	8/8/11
Load Cell 2	132304A	Interface	8/8/11
Load Cell 3	19477	Interface	8/8/11
Load Cell 4	19325	Interface	8/8/11
Load Cell 5	131827A	Interface	8/8/11
Load Cell 6	132302A	Interface	8/8/11
Load Cell 7	19267	Interface	8/8/11
Load Cell 8	19321	Interface	8/8/11