

REPORT NUMBER: SINCAP-KAR-12-043

**NEW CAR ASSESSMENT PROGRAM (NCAP)
MOVING DEFORMABLE BARRIER SIDE IMPACT TEST**

**NISSAN MOTOR CO., LTD.
2012 NISSAN VERSA 1.6 SV 4-DOOR SEDAN**

NHTSA No: MC5200

**PREPARED BY:
KARCO ENGINEERING, LLC.
9270 HOLLY ROAD
ADELANTO, CA 92301**




FEBRUARY 7, 2012


FINAL REPORT

**PREPARED FOR:
U.S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
OFFICE OF CRASHWORTHINESS STANDARDS
MAIL CODE: NVS-111
1200 NEW JERSEY AVE, SE, ROOM W43-410
WASHINGTON, D.C. 20590**

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared By: 
Mr. Kelsey A. Chiu, Engineering Department Supervisor
KARCO Engineering, LLC.

Reviewed By: 
Mr. Michael L. Dunlap, Director of Operations
KARCO Engineering, LLC.

Approved By: 
Mr. Frank D. Richardson, Program Manager
KARCO Engineering, LLC.

Approval Date: February 7, 2012

FINAL REPORT ACCEPTANCE BY OCWS:

Division Chief, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

COTR, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

TECHNICAL REPORT DOCUMENTATION PAGE

1. Report No. SINCAP-KAR-12-043	2. Government Accession No.	3. Recipient's Catalog No.
4. Title and Subtitle Final Report of New Car Assessment Program Side Impact MDB Testing of a 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5200	5. Report Date February 7, 2012	
	6. Performing Organization Code KAR	
7. Authors Mr. Kelsey A. Chiu, Engineering Department Supervisor, KARCO Mr. Frank Richardson, Program Manager, KARCO	8. Performing Organization Report No. TR-P30003-27-NC	
	10. Work Unit No.	
9. Performing Organization Name and Address KARCO Engineering, LLC. 9270 Holly Rd. Adelanto, CA 92301	11. Contract or Grant No. DTNH22-09-D-00122	
	13. Type of Report and Period Covered Final Test Report, Jan. 24, 2012 - Feb 7, 2012	
12. Sponsoring Agency Name and Address U. S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards (NVS-111) 1200 New Jersey Ave., SE, Room W43-410 Washington, D.C. 20590	14. Sponsoring Agency Code NVS-111	
	15. Supplementary Notes	

16. Abstract

A 55/28 km/h 90 deg. Moving Deformable Barrier NCAP Side Impact Test was conducted on the subject 2012 Nissan Versa 1.6 SV 4-door sedan in accordance with the specifications of the Office of Crash Worthiness Standards Test Procedure for the generation of consumer information on vehicle side crash protection. The test was conducted at the KARCO Engineering, LLC. facility in Adelanto, California on January 24, 2012.

The impact velocity of the Moving Deformable Barrier was 61.5 km/h and the outside ambient temperature at the struck (driver's) side of the vehicle was 12.2 deg. C. The target vehicle's maximum post-test static crush was 320 mm located at level 3. The test vehicle's occupant performance data is as follows:

Measurement Description	Driver ATD (ES-2re)		
	Units	IARV	Result
Head Injury Criteria (HIC ₃₆)		1000	215.6
Maximum Thorax Rib Deflection	mm	44	39
Total Abdominal Force	N	2500	980
Pubic Symphysis Force	N	6000	2474

Measurement Description	Passenger ATD (SID-IIs)		
	Units	IARV	Result
Head Injury Criteria (HIC ₃₆)		1000	686.3
Resultant Lower Spine Acceleration	g	82	64
Total Pelvic Force (Sum of Acetubular and Iliac Forces)	N	5525	3057
Maximum Thoracic Rib Deflection	mm	38*	28
Maximum Abdominal Rib Deflection	mm	45*	32

The doors on the struck side of the vehicle did not separate from the body at the hinges or latches, and the opposite doors did not open during the side impact event.

* Proposed IARV

17. Key Words New Car Assessment Program (NCAP) Side Impact Moving Deformable Barrier (MDB) ES-2re SID-IIs		18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Admin. Technical Information Services Division, NPO-411 1200 New Jersey Ave., SE, Room E12-100 Washington, DC 20590	
19. Security Classification of this report UNCLASSIFIED	20. Security Classification of this page UNCLASSIFIED	21. No. of Pages 154	22. Price

TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
1	Test Purpose and Procedure	1
2	Summary of Test Results	2
3	Occupant and Vehicle Information	4
<u>Data Sheet</u>		<u>Page</u>
1	General Test and Vehicle Parameter Data	5
2	Seat, Seat Belt, Steering Wheel Adjustment and Fuel System Data	9
3	Dummy Longitudinal Clearance Dimensions	13
4	Dummy Lateral Clearance Dimensions	14
5	Camera and Instrumentation Data	15
6	Test Vehicle Accelerometer Locations	16
7	MDB Accelerometer Locations	17
8	Post-Test Observations	18
9	MDB Summary of Results	20
10	Test Vehicle Profile Measurements	21
11	Test Vehicle Exterior Crush Measurements	22
12	MDB Exterior Static Crush Measurements	25
13	FMVSS No. 301 Static Rollover Results	26
14	Dummy/Vehicle Temperature and Humidity Stabilization	27
<u>Appendix</u>		<u>Page</u>
A	Photographs	A
B	Vehicle and Dummy Response Data Plots	B
C	Dummy Configuration and Performance Verification Data	C
D	Test Equipment and Instrumentation Calibration Data	D

SECTION 1
TEST PURPOSE AND PROCEDURE

This moving deformable barrier side impact test is part of the MY 2012 New Car Assessment Program Side Impact Test Program, sponsored by the National Highway Traffic Safety Administration (NHTSA), under contract number DTNH22-09-D-00122. The purpose of this test is to generate comparative side impact performance in a 2012 Nissan Versa 1.6 SV 4-door sedan. The side impact test was conducted in accordance with the Office of Crashworthiness Standard's Laboratory Test Procedure dated August 2011.

SECTION 2

SUMMARY OF TEST RESULTS

A 2012 Nissan Versa 1.6 SV 4-door sedan was impacted on the left (driver's) side by a Moving Deformable Barrier (MDB) which was moving forward in a 27° crabbed position to the tow road guidance system at a velocity of 61.5 km/h (38.2 mph). The target vehicle was stationary and was positioned at an angle of 63° to the line of forward motion. The side impact test was conducted by KARCO Engineering, LLC. in Adelanto, California, on January 24, 2012. Pre- and post-test photographs of the test vehicle, the MDB and the dummies (ES-2re and SID-IIs) are included in Appendix A of this report.

Dummies were placed in the driver and left rear designated seating positions according to instructions specified in the OCWS Side Impact Laboratory Test Procedure, dated August 2011. The side impact event was documented by 11 cameras. Camera locations are included in Data Sheet No. 5 of this report.

The dummies were instrumented in the following manner:

DRIVER ATD (ES-2re)

Primary and redundant head CG tri-axial accelerometers

Chest upper rib, middle rib and lower rib y-axis displacement potentiometers

Abdomen forward, middle, and rear y-axis load cells

Lower spine (12) tri-axial accelerometers

Pubic symphysis y-axis load cell

PASSENGER ATD (SID-IIs)

Primary and redundant head CG tri-axial accelerometers

Chest upper rib, middle rib and lower rib y-axis displacement potentiometers

Abdomen upper rib and lower rib y-axis displacement potentiometers

Lower spine (12) tri-axial accelerometers

Acetabulum and iliac wing y-axis load cells

Appendix B contains the vehicle and dummy response data. Dummy configuration and performance verification data can be found in Appendix C of this report.

Dummy injury readings were recorded as follows:

Measurement Description	Units	Driver ATD (ES-2re)	
		Threshold	Result
Head Injury Criteria (HIC ₃₆)		1000	215.6
Maximum Thorax Rib Deflection	mm	44	39
Combined Abdominal Force	N	2500	980
Pubic Symphysis Force	N	6000	2474

Measurement Description	Units	Passenger ATD (SID-IIs)	
		Threshold	Result
Head Injury Criteria (HIC ₃₆)		1000	686.3
Lower Spine (T12) Resultant Acceleration	g	82	64
Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	3057
Maximum Thoracic Rib Deflection	mm	38*	28
Maximum Abdominal Rib Deflection	mm	45*	32

*Proposed IARV

Supplemental restraint information is given below:

Restraint Type	Left Front (Driver) Occupant Location 1		Left Rear (Passenger) Occupant Location 4	
	Mounted	Deployed	Mounted	Deployed
Frontal Airbag	Yes	Yes	No	
Knee Airbag	No		No	
Side Airbag 1 (Curtain)	Yes	Yes	Yes	Yes
Side Airbag 2 (Torso/Pelvis)	Yes	Yes	No	
Seat Belt Pretensioner	Yes	Yes	No	
Seat Belt Load Limiter	Yes	Yes	No	
Other	No		No	

GENERAL COMMENTS

The doors on the struck side of the vehicle remained closed and latched. There was no separation at the hinges or latches. The doors on the non-struck side remained closed and latched. There were no ATD values that exceeded limits.

SECTION 3

OCCUPANT AND VEHICLE INFORMATION/DATA SHEETS

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5200
Test Program: NCAP MDB Side Impact Test Test Date: 1/24/12

CONVERSION FACTORS

Quantity	Typical Application	Std Units	Metric Unit	Multiply By
Mass	Vehicle Weight	lb	kg	0.4536
Linear Velocity	Impact Velocity	miles/hr	km/hr	1.609344
Length or Distance	Measurements	in	mm	25.4
Volume	Fuel Systems	gal	liter	3.785
Volume	Small Fluids	oz	mL	29.574
Pressure	Tire Pressures	lbf/in ²	kPa	6.895
Temperature	General Use	°F	°C	$=(T_f - 32)/1.8$
Force	Dynamic Forces	lbf	N	4.448
Moment	Torque	lbf-ft	N•m	1.355

DATA SHEET NO. 1

GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5200
 Test Program: NCAP MDB Side Impact Test Test Date: 1/24/12

TEST VEHICLE INFORMATION AND OPTIONS

NHTSA Number	MC5200
Model Year	2012
Make	Nissan
Model	Versa 1.6 SV
Body Style	4-Door Sedan
VIN	3N1CN7AP3CL812860
Body Color	Red Brick
Odometer Reading (km / mi)	256 / 159
Engine Displacement (L)	1.6
Type / No. of Cylinders	Inline 4
Engine Placement	Transverse
Transmission Type	CVT
Transmission Speeds	
Overdrive	Yes
Final Drive	Front
Roof Rack	No
Sunroof / T-Top	No
Running Boards	No
Tilt Steering Wheel	Yes
Power Seats	No
Anti-Lock Brakes (ABS)	Yes
All Wheel Drive (AWD)	No

Traction Control System (TCS)	Yes
Auto-Leveling System	No
Automatic Door Locks	Yes
Power Window Auto-Reverse	Yes
Other Optional Feature	None
Driver Front Airbag	Yes
Driver Curtain Airbag	Yes
Driver Head/Torso Airbag	No
Driver Torso Airbag	No
Driver Torso/Pelvis Airbag	Yes
Driver Pelvis Airbag	No
Driver Knee Airbag	No
Rear Pass. Curtain Airbag	Yes
Rear Pass. Head/Torso Airbag	No
Rear Pass. Torso Airbag	No
Rear Pass. Torso/Pelvis Airbag	No
Rear Pass. Pelvis Airbag	No
Driver Seat Belt Pretensioner	Yes
Rear Pass. Seat Belt Pretensioner	No
Driver Load Limiter	Yes
Rear Pass. Load Limiter	No
Other Safety Restraint	None

Does Owner's Manual provide instructions to turn off automatic door locks? No

DATA FROM CERTIFICATION LABEL

Manufactured By	Nissan Motor Co., LTD.
Date of Manufacture	Aug-11
Vehicle Type	Passenger

GVWR (kg)	1537
GAWR Front (kg)	794
GAWR Rear (kg)	758

VEHICLE SEATING AND CAPACITY WEIGHT INFORMATION

Measured Parameter	Front	Rear	Third	Total
Designated Seating Capacity	2	3		5
Capacity Weight (VCW) (kg)				385.0
DSC x 68.04 (kg)				340.2
Cargo Weight (RCLW) (kg)				44.8

A
B
A-B

VEHICLE SEAT TYPE

Seating Location	Type of Seat Pan				Type of Seat Back		
	Bucket	Bench	Split Bench	Contoured	Fixed	Adjustable	
						w/ Lever	w/ Knob
Front Seat	Yes					Yes	
Rear or Second Row Seat		Yes			Yes		
Third Row Seat							

DATA SHEET NO. 1 ... (CONTINUED)


GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan

NHTSA No. MC5200

Test Program: NCAP MDB Side Impact Test

Test Date: 1/24/12

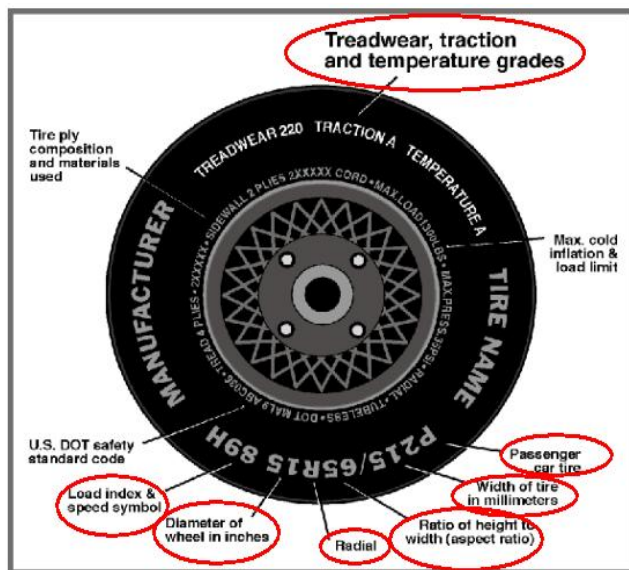

TIRE PLACARD INFORMATION

Measured Parameter	Front	Rear
Recommended Cold Tire Pressure (kPa)	230	230
Recommended Tire Size	P185/65R15	P185/65R15

VEHICLE TIRE INFORMATION

Measured Parameter	Front	Rear
Max. Tire Pressure (kpa)	300	300
Tire Size on Vehicle	P185/65R15	P185/65R15
Tire Manufacturer	Continental	Continental
Tire Name	ContiPro Contact	ContiPro Contact
Tire Type	All Season	All Season
Tire Width	185	185
Aspect Ratio	65	65
Radial	Yes	Yes
Wheel Diameter	15	15
Load Index/Speed Symbol	86H	86H
Treadware	400	400
Traction Grade	AA	AA
Temperature Grade	A	A
Tire Material	Polyester, Steel, Nylon	Polyester, Steel, Nylon

DATA SHEET NO. 1 ... (CONTINUED)

GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5200
 Test Program: NCAP MDB Side Impact Test Test Date: 1/24/12

TIRE PRESSURES

	Units	LF	RF	LR	RR
As Delivered	kPa	220	220	230	220
Tire Placard	kPa	230	230	230	230
Owner's Manual	kPa	230	230	230	230
As Tested	kPa	230	230	230	230

MDB TIRE SPECIFICATIONS

	Units	Requirement	LF	RF	LR	RR
Tire Size		P205/75R15	P205/75R15	P205/75R15	P205/75R15	P205/75R15
Tire Pressure	kPa	200 ± 21	200	200	200	200

TEST VEHICLE AXLE WEIGHTS

	Units	As Delivered (UVW)			As Tested (ATW)			Fully Loaded		
		Front	Rear	Total	Front	Rear	Total	Front	Rear	Total
Left	kg	340.0	236.5		379.5	306.0		381.5	309.0	
Right	kg	314.5	221.0		315.5	273.5		317.0	273.0	
Ratio	%	58.9%	41.1%	100.0%	54.5%	45.5%	100.0%	54.5%	45.5%	100.0%
Total	kg	654.5	457.5	1112.0	695.0	579.5	1274.5	698.5	582.0	1280.5

TARGET TEST WEIGHT CALCULATION

Measured Parameter	Units	Value	
Total Delivered Weight (UVW)	kg	1112.0	A
Actual Weight of 2 P572 ATDs Used	kg	125.0	B
Rated Cargo/Luggage Wt (RCLW)	kg	44.8	C
Calculated Vehicle Target Wt (TVT _W)	kg	1281.8	A+B+C

Does the measured As Tested Vehicle Weight lie within the required weight range (i.e. Calculated Test Vehicle Target Weight -4.5 kg to -9 kg)? Yes No

WEIGHT OF BALLAST AND VEHICLE COMPONENTS REMOVED TO MEET TVTW

Component Description	Weight (kg)
Front and Rear Bumper Fascia	10.0
Headlights	5.0
Non-Struck Side Door Panels and Windows	10.5
Spare Tire and Tools	14.0
Non-Struck Side Mirror	1.0
Other	4.0
Ballast / Equipment Added	95.1

DATA SHEET NO. 1 ... (CONTINUED)

GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5200

Test Program: NCAP MDB Side Impact Test Test Date: 1/24/12

TEST VEHICLE ATTITUDE AND CG

Measurement Description	Units	Fully Loaded	As Tested	Meets Requirement***
LF	mm	666	674	Yes
RF	mm	682	676	Yes
RR	mm	641	631	Yes
LR	mm	649	643	Yes
Vehicle CG (Aft of Front Axle)	mm	1179	1180	
Vehicle CG (Left (+)/Right (-) from Longitudinal Centerline)	mm	58	56	

***The "As Tested" vehicle attitude measurements must be equal to or within ± 10 mm of the "Fully Loaded" vehicle attitude measurements at each wheel well. Indicate "Yes" or "No" for "Meets Requirement"

DATA SHEET NO. 2

SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan

NHTSA No. MC5200

Test Program: NCAP MDB Side Impact Test

Test Date: 1/24/12

SEAT POSITIONING

The driver's seat, front center seat (if applicable), and right front passenger's seat should be set to the mid-track, lowest, mid-angle position. The struck side rear passenger's seat, rear center seat, and non-struck side rear passenger's seats should be set to the rear-most, lowest, mid-angle position.

SCRL ANGLE RANGE

Seat	SCRL (°)		
	Max	Min	Mid
Driver Seat	3.0	0.0	1.5
Front Passenger Seat	Fixed	Fixed	Fixed
Front Center Seat			
Struck Side Rear Seat	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Fixed
Rear Center Seat	Fixed	Fixed	Fixed

SEAT HEIGHT AND ANGLE

Seat	As Tested SCRL Angle	As Tested SCRP Height	SCRP Height Position	SCRP Height (mm)		
				Rearmost	Mid Fore/Aft	Forwardmost
Driver Seat	1.5	562	Max	548	562	576
			Mid	548	562	576
			Min	548	562	576
Front Passenger Seat	Fixed	561	Max	547	561	575
			Mid	547	561	575
			Min	547	561	575
Front Center Seat			Max			
			Mid			
			Min			
Struck Side Rear Seat	Fixed	Fixed	Max	Fixed	Fixed	Fixed
			Mid	Fixed	Fixed	Fixed
			Min	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Max	Fixed	Fixed	Fixed
			Mid	Fixed	Fixed	Fixed
			Min	Fixed	Fixed	Fixed
Rear Center Seat	Fixed	Fixed	Max	Fixed	Fixed	Fixed
			Mid	Fixed	Fixed	Fixed
			Min	Fixed	Fixed	Fixed

DATA SHEET NO. 2 ... (CONTINUED)

SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan

NHTSA No. MC5200

Test Program: NCAP MDB Side Impact Test


Test Date: 1/24/12

SEAT FORE/AFT POSITION

Seat	Total Fore/Aft Travel		Test Position From Forwardmost Position	
	mm	Detents*	mm	Detent*
Driver Seat	240	25	120	12
Front Passenger Seat	240	25	120	12
Front Center Seat				
Struck Side Rear Seat	Fixed	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Fixed	Fixed
Rear Center Seat	Fixed	Fixed	Fixed	Fixed

SEAT BACK ADJUSTMENT

The driver's seat back is positioned to the manufacturer's designated design angle. The front center and front passenger's seat backs are positioned in a similar manner as the driver's seat back. The struck side rear seat back is positioned such that the dummy's head is level. The rear center and non-struck side rear outboard seat backs are positioned in a similar manner as the struck side rear seat back.

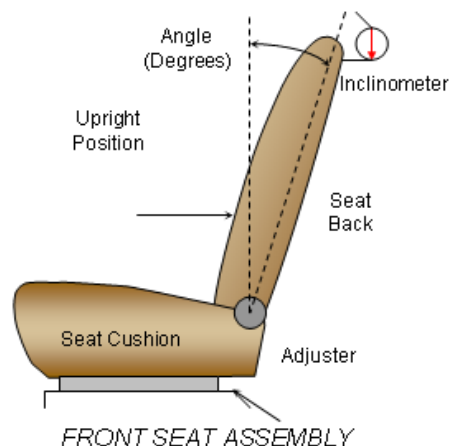

Seat	Total Seat Back Angle Range		Test Position from Most Upright	
	Degrees	Detents*	Degree	Detent*
Driver Seat w/Seated Dummy	58.6	31	0.4	6
Front Passenger Seat	59.5	31	0.4	6
Front Center Seat				
Struck Side Rear Seat w/Seated Dummy	Fixed	Fixed	3.4	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	3.4	Fixed
Rear Center Seat	Fixed	Fixed	3.4	Fixed

DATA SHEET NO. 2 ... (CONTINUED)

SEAT ADJUSTMENT, FUEL SYSTEMS, AND STEERING WHEEL DATA

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5200
 Test Program: NCAP MDB Side Impact Test Test Date: 1/24/12

SEAT BELT ANCHORAGE ADJUSTMENT

Seat belt anchorages are adjusted in accordance with the information provided by the manufacturer on Form No. 1. The positions are marked H, M1,..., L from top to bottom.

	Total No. of Positions	Placed in Position
Driver Seat	4	H
Rear Seat	Fixed	Fixed


HEAD RESTRAINT ADJUSTMENT

The driver's head restraint is adjusted to the highest and most full forward in-use position. The struck-side rear passenger's head restraint is adjusted to the lowest and most full forward in-use position.

	Total No. of Positions	Placed in Position
Driver Seat	6	Full Up
Rear Seat	1	Full Down

STEERING COLUMN ADJUSTMENT

Steering wheel and column adjustments are made so that the steering wheel hub is at the center of the geometric locus it describes when it moves through its full range of motion.



	Degrees	Fore-Aft Position (mm)
Lowermost - Position 1	24.1	
Geometric Center - Position 2	25.9	
Uppermost - Position 3	27.8	
Telescoping Steering Wheel Travel		
Test Position	25.9	

DATA SHEET NO. 2 ... (CONTINUED)

SEAT ADJUSTMENT, FUEL SYSTEMS, AND STEERING WHEEL DATA

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan

NHTSA No. MC5200

Test Program: NCAP MDB Side Impact Test

Test Date: 1/24/12


FUEL TANK CAPACITY

Description	Liters
Usable Capacity of "Standard Tank" (see Form No. 1)	40.88
Usable Capacity of "Optional Tank" (see Form No. 1)	
Usable Capacity of "Standard Tank" (see Owner's Manual)	
Usable Capacity of "Optional Tank" (see Owner's Manual)	
93% of Usable Capacity	38.02
Actual amount of Solvent Used in Test	38.02
1/3 of Usable Capacity	13.63

Is the Actual Amount of Solvent Used in the test equal to 93% ± 1% of the Usable Capacity stated in the Form No. 1? **Yes** **No**

FUEL PUMP

The vehicle is equipped with an electric fuel pump. The fuel pump will run for 1 second after the ignition is switched to on or while the engine is running.

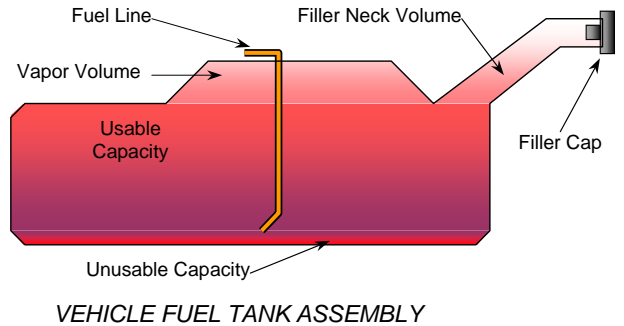

DATA SHEET NO. 3


DUMMY LONGITUDINAL CLEARANCE DIMENSIONS

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan

NHTSA No. MC5200

Test Program: NCAP MDB Side Impact Test

Test Date: 1/24/12

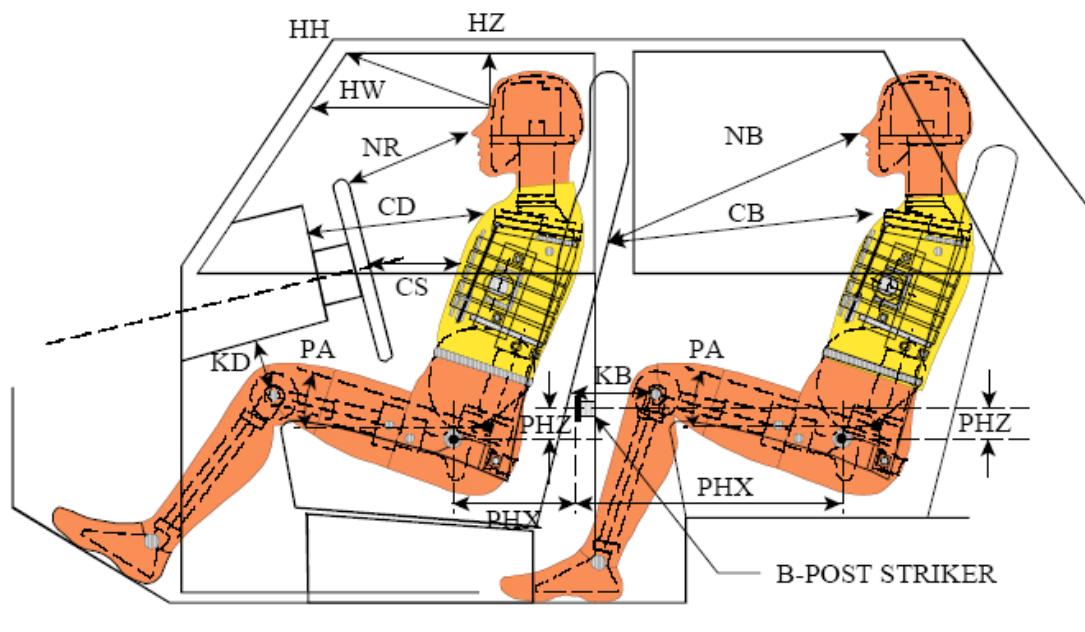

LEFT SIDE VIEW

NOTE: 2-DOOR VEHICLE SHOWN.
REAR DUMMY PHX & PHZ
MEASUREMENTS FOR A 4-DOOR
VEHICLE WOULD USE THE C-POST
STRIKER AS A REFERENCE POINT

DUMMY LONGITUDINAL CLEARANCE DIMENSION INFORMATION

Driver Code	Pass. Code	Description	Driver		Passenger	
			Length (mm)	Angle (°)	Length (mm)	Angle (°)
HH		Head to Header	392			
HW		Head to Windshield	575			
HZ	HZ	Head to Roof	150		233	
NR	NB	Nose to Rim/Seat Back	469		676	
CD	CB	Chest to Dash/Seat Back	584		662	
CS		Chest to Steering Wheel	288			
KD(L)/KDA(L)°	KB(L)/KBA(L)°	Left Knee to Dash/Seat Back	136	32.3	368	14.5
KD(R)/KDA(R)°	KB(R)/KBA(R)°	Right Knee to Dash/Seat Back	114	29.0	371	16.7
PAX°	PAX°	Pelvic Tilt Angle X		15.9		20.9
	PAY°	Pelvic Tilt Angle Y				0.3
PHX	PHX	Hip Point to Striker (x-axis)	243		212	
PHZ	PHZ	Hip Point to Striker (z-axis)	81		226	

DATA SHEET NO. 4


DUMMY LATERAL CLEARANCE DIMENSIONS

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan

NHTSA No. MC5200

Test Program: NCAP MDB Side Impact Test

Test Date: 1/24/12

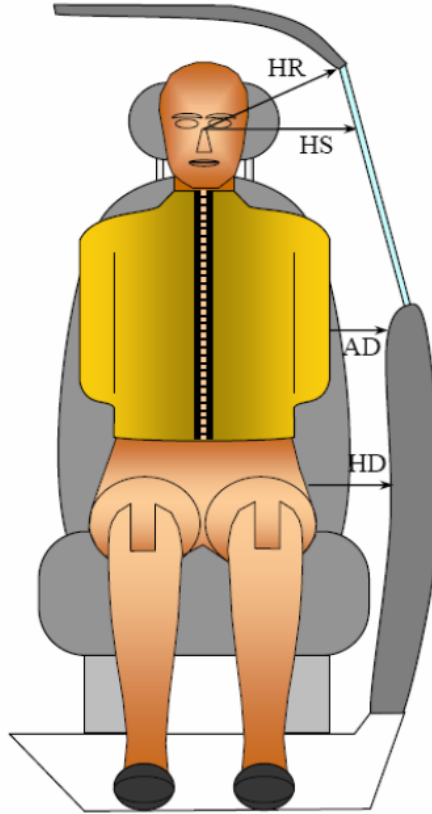

FRONT VIEW OF DUMMY

DUMMY LATERAL CLEARANCE DIMENSION INFORMATION

Code	Measurement Description	Units	Driver	Passenger
HR	Head to Side Header	mm	162	223
HS	Head to Side Window	mm	275	340
AD	Arm to Door	mm	70	131
HD	H-Point to Door	mm	115	162

DATA SHEET NO. 5


CAMERA AND INSTRUMENTATION DATA

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan

NHTSA No. MC5200

Test Program: NCAP MDB Side Impact Test

Test Date: 1/24/12

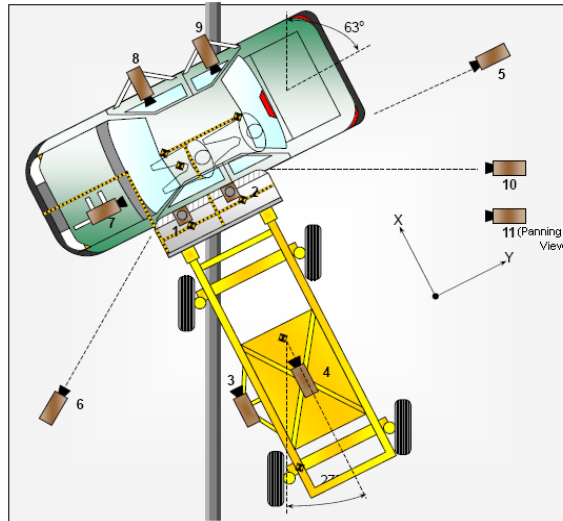

CAMERA LOCATIONS AND DATA

No.	View	Coordinates (mm)			Lens Length (mm)	Operating Frame Rate (fps)
		X	Y	Z		
1	Overhead Overall	1220	2287	-5486	14	1000
2	Overhead Close-Up	609	2287	-5102	35	1000
3	Left Impact Point (MDB)	-2134	0	-1143	25	1000
4	Side Overall (MDB)	-3912	838	-1829	12.5	1000
5	Rear	-64	2485	-1348	85	1000
6	Left Front	-2266	-3564	-1475	24	1000
7	Driver Front (On-Board)	416	-677	-679	24	1000
8	Driver Side (On-Board)	1520	654	-473	14	1000
9	Passenger Side (On-Board)	1451	1670	-515	14	1000
10	Real Time Overall				Zoom	30
11	Real Time Inrun				Zoom	30

Reference: Impact Point Projected to Ground; +X = To Front of MDB, +Y = To Right of MDB, +Z = Down

*All measurements accurate to ±6 mm

INSTRUMENTATION

Driver Dummy Channels	16
Passenger Dummy Channels	16
Vehicle Structure Accelerometers	23
MDB Accelerometers	5
Total	60

DATA SHEET NO. 6


TEST VEHICLE ACCELEROMETER LOCATIONS

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan

NHTSA No. MC5200

Test Program: NCAP MDB Side Impact Test

Test Date: 1/24/12

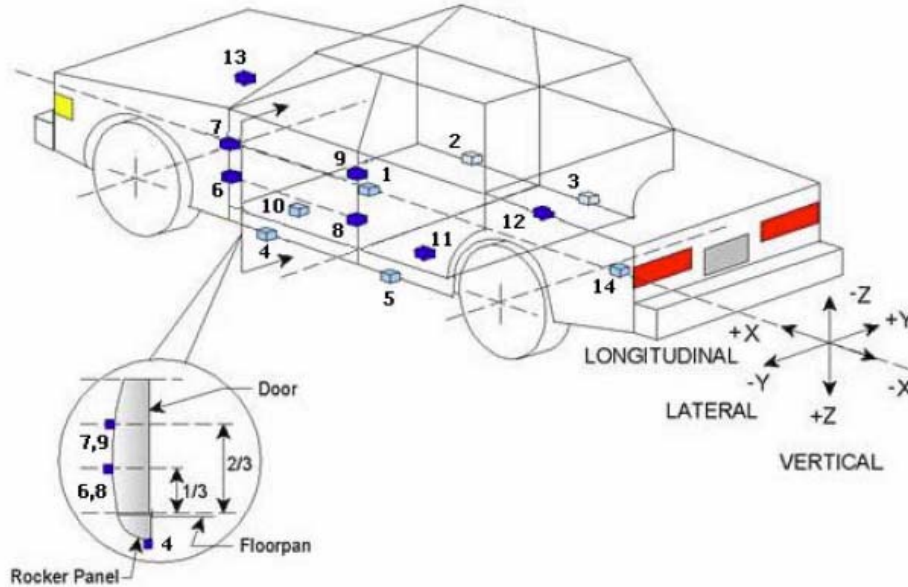

VEHICLE ACCELEROMETER PRE-TEST LOCATIONS

Loc. No.	Sensor Description	Coordinates (mm)		
		X	Y	Z
1	Vehicle CG	1872	0	-330
2	Right Sill at Front Seat	2798	462	-319
3	Right Sill at Rear Seat	1855	655	-339
4	Left Sill at Front Door	2527	-605	-164
5	Left Sill at Rear Door	1605	-610	-191
6	A-Pillar Lower	3245	-761	-717
7	A-Pillar Middle	3245	-761	-485
8	B-Pillar Lower	2125	-679	-574
9	B-Pillar Middle	2125	-679	-831
10	Front Seat Track	2345	-538	-326
11	Rear Seat Structure			
12	Right Rear Occupant Compartment	1939	356	-225
13	Engine Block	3780	344	-766
14	Rear Floorpan Above Axle	835	-454	-485

Reference: X – Rear surface of vehicle (+ forward)
 Y – Vehicle centerline (+ to right)
 Z – Ground plane (+ down)

DATA SHEET NO. 7


MDB ACCELEROMETER LOCATIONS

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan

NHTSA No. MC5200

Test Program: NCAP MDB Side Impact Test

Test Date: 1/24/12

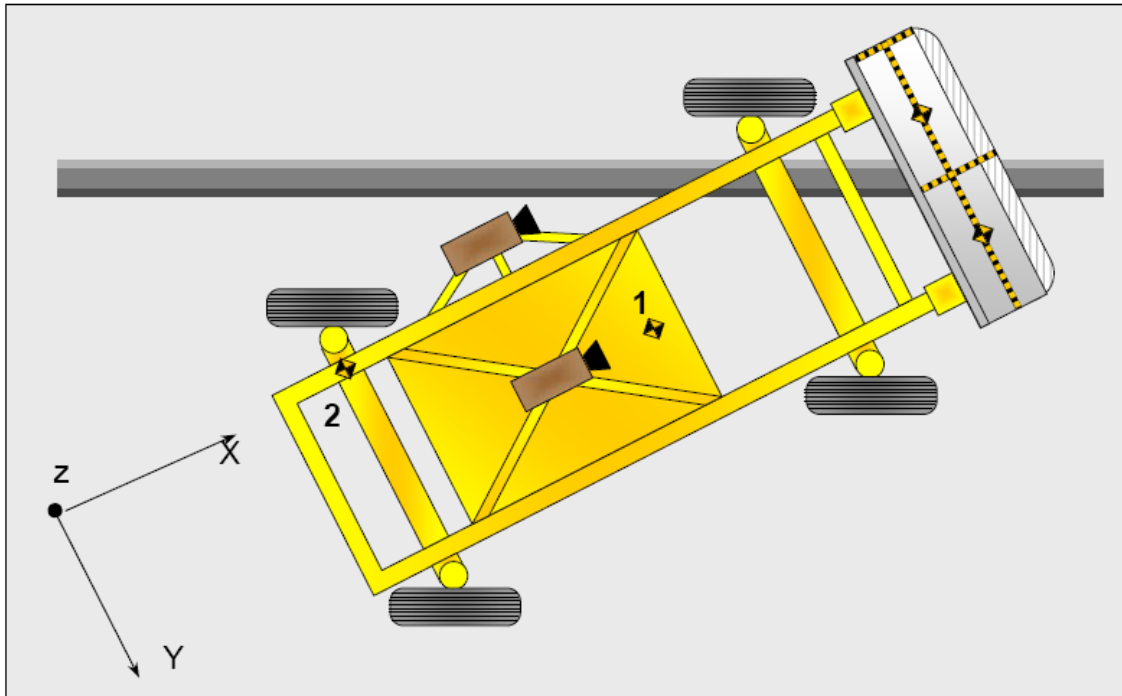

MDB ACCELEROMETER LOCATIONS

Loc. No.	Accelerometer Location	Measurement		
		X	Y	Z
1	MDB CG	-1195	0	-430
2	MDB Rear	-2642	-593	-608

Reference: X – Face of MDB (+ forward)
 Y – MDB centerline (+ to right)
 Z – Ground plane (+ down)

DATA SHEET NO. 8

POST-TEST OBSERVATIONS

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5200
 Test Program: NCAP MDB Side Impact Test Test Date: 1/24/12

TEST DUMMY INFORMATION AND CONTACT POINTS

Dummy Body Part	Front Seat Dummy (ES-2re)	Rear Seat Dummy (SID-IIs)
Face	Side Header, Curtain Airbag	Side Header, Curtain Airbag
Top of Head	Side Header	Side Header, Center Seat Back
Left Side of Head	Curtain Airbag, Side Header	Side Header, Curtain Airbag
Back of Head	Side Header, Curtain Airbag, Headrest	Side Header, Headrest, Center Seat Back
Left Shoulder	Curtain Airbag, Torso/Pelvis Airbag	Door Panel
Upper Torso	Seat, Torso/Pelvis Airbag	Seat
Lower Torso	Seat, Torso/Pelvis Airbag	Seat, Door Panel
Left Hip	Torso/Pelvis Airbag, Door Panel	Seat
Left Knee	Door Panel, Right Knee	Door Panel, Right Knee

POST-TEST DOOR PERFORMANCE

Description	Struck Side		Non-Struck Side		Rear Hatch/ Other Door
	Front	Rear	Front	Rear	
Remained Closed and Operational	No	No	Yes	Yes	Yes
Total Separation from Vehicle at Hinges or Latches	No	No	No	No	No
Latch or Hinge System Pulled Out of Their Anchorages	No	No	No	No	No
Disengaged from Latched Position	No	No	No	No	No
Latch Separated from Striker	No	No	No	No	No
Jammed Shut	Yes	Yes	No	No	No
If Door Opened at Striker, Record Width of Opening at Striker (mm)	n/a	n/a	n/a	n/a	n/a

POST-TEST SEAT PERFORMANCE

Description	Struck Side		Non-Struck Side	
	Front	Rear	Front	Rear
Seat Movement Along Seat Track	No	No	No	No
Seat Disengagement from Floor Pan	No	No	No	No
Seat Back Movement from Initial Position	No	No	No	No
Seat Back Collapse	No	No	No	No

POST-TEST STRUCTURAL OBSERVATIONS

Critical Areas of Performance	Observations and Conclusions
Pillar Performance	No Separation
Sill Separation	No Separation
Windshield Damage	None
Side Window Damage	Struck Side Windows Broken
Other Notable Effects	None

DATA SHEET NO. 8 ... (CONTINUED)

POST-TEST OBSERVATIONS

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5200
 Test Program: NCAP MDB Side Impact Test Test Date: 1/24/12

SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION

Restraint Type	Struck Side Driver		Struck Side Rear Passenger	
	Mounted	Deployed	Mounted	Deployed
Frontal Airbag	Yes	Yes	No	
Knee Airbag	No		No	
Side Airbag 1 (Curtain)	Yes	Yes	Yes	Yes
Side Airbag 1 (Torso/Pelvis)	Yes	Yes	No	
Seat Belt Pretensioner	Yes	Yes	No	
Seat Belt Load Limiter	Yes	Yes	No	
Other	No		No	

IMPACT POINT LOCATION DATA

Measured Parameter	Units	Tolerance	Value
Vehicle Wheel Base	mm		2595
Vertical Impact Reference Line (Aft of Front Axle)(Intended Impact Point)	mm		357
Actual Impact Point (Aft of Front Axle)	mm		336
Horizontal Offset (+ forward / - rearward)	mm	± 50 of Intended Impact Point	21
Vertical Offset (+ down / - up)	mm	± 20 of Intended Impact Point	0

DATA SHEET NO. 9
MDB SUMMARY OF RESULTS

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan NHTSA No. MC5200
 Test Program: NCAP MDB Side Impact Test Test Date: 1/24/12

MDB SPECIFICATIONS

Measurement Description	Length (mm)
Overall Width of Framework Carriage	1251
Overall Length including Honeycomb Face	4023
Wheel Base of Framework Carriage	2595
CG location aft of Front Axle	1118

MDB WEIGHTS

	Units	Front Axle	Rear Axle	Total
Left	kg	402	298	700
Right	kg	377	292	669
Ratio	%	56.9%	43.1%	100.0%
Totals	kg	779	590	1368

SPEED AND IMPACT DATA

Measured Parameter	Units	Requirement	Value
Trap No. 1 Velocity (Primary)	km/h	61.1 to 62.7	61.54
Trap No. 2 Velocity (Redundant)	km/h	61.1 to 62.7	61.52
MDB CL to Target Vehicle CL	degrees	88.5 to 91.5	90.5
MDB Forward Line of Motion to Target Vehicle CL	degrees	62.5 to 63.5	62.6
MDB Crabbed Angle to MDB Forward Line of Motion	degrees	26.0 to 28.0	26.9

MAXIMUM STATIC CRUSH OF HONEYCOMB FACE

Vertical Location			From Centerline		Max. Crush (mm)
Row	Description	Height (mm)	Distance (mm)	Direction	
A	Center of Bumper	432	800	Right	187
B	Top of Bumper	533	800	Right	97
C	Mid Level	686	800	Left	86
D	Top of Stack	813	800	Left	118

DATA SHEET NO. 10


TEST VEHICLE PROFILE MEASUREMENTS

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan

NHTSA No. MC5200

Test Program: NCAP MDB Side Impact Test

Test Date: 1/24/12

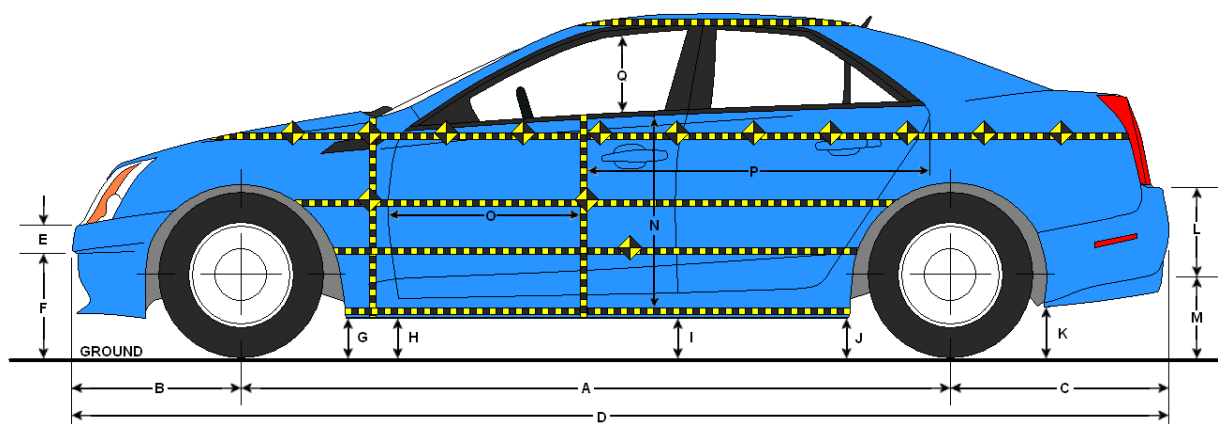

LEFT SIDE VIEW

VEHICLE PRE- AND POST-TEST MEASUREMENT INFORMATION

Code	Description	Pre-Test	Post-Test	Difference
A	Wheelbase	2595	2597	2
B	Front Axle to FSOV	710	713	3
C	Rear Axle to RSOV	1010	1002	-8
D	Total Length at Centerline	4316	4313	-3
E	Front Bumper Thickness	137	137	0
F	Front Bumper Bottom to Ground	415	416	1
G	Sill Height at Front Wheel Well	212	205	-7
H	Sill Height at Front Door Leading Edge	207	209	2
I	Sill Height at B-Pillar	231	277	46
J1	Sill Height at Rear Wheel Well	234	266	32
J2	Pinch Weld Height at Rear Wheel Well	190	183	-7
K	Sill Height Aft of Rear Wheel Well	314	288	-26
L	Rear Bumper Thickness	138	138	0
M	Rear Bumper Bottom to Ground	400	371	-29
N	Sill Height to Bottom of Front Window Sill	626	589	-37
O	Front Door Leading Edge to Impact CL	781	708	-73
P	Rear Door Trailing Edge to Impact CL	1346	1237	-109
Q	Front Window Opening	439	426	-13
R	Right Side Length	2979	2987	8
S	Left Side Length	2980	2938	-42
T	Vehicle Width at B-Pillar	1694	1490	-204

All measurements in mm with tolerance of ± 3 mm

DATA SHEET NO. 11


TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan

NHTSA No. MC5200

Test Program: NCAP MDB Side Impact Test

Test Date: 1/24/12

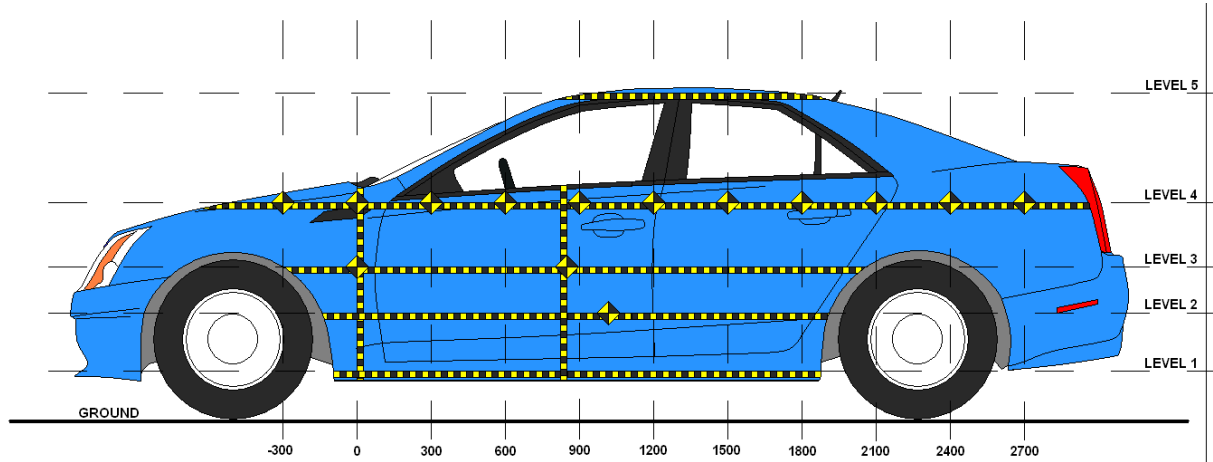

LEFT SIDE VIEW

MAXIMUM EXTERIOR CRUSH MEASUREMENTS

Level	Description	Height Above Ground (mm)	Maximum Exterior Static Crush	Distance from Impact
1	Sill Top	261	123	900
2	Occupant H-Point	593	317	1350
3	Mid-Door	645	320	1650
4	Window Sill	915	259	1650
5	Window Top	1449	51	1200

DATA SHEET NO. 11 ... (CONTINUED)

TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan

NHTSA No. MC5200

Test Program: NCAP MDB Side Impact Test

Test Date: 1/24/12

EXTERIOR CRUSH MEASUREMENTS AT EACH LEVEL

	Pre-Test (mm)					Post-Test (mm)					Difference (mm)				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
-900															
-750															
-600															
-450				816					825					9	
-300				778					790					12	
-150			647	757				669	772				22	15	
0		654	656	740			680	681	764			26	25	24	
150	705	658	656	731		805	886	870	787		100	228	214	56	
300	705	656	653	723		805	918	913	822		100	262	260	99	
450	703	654	651	718		808	912	899	854		105	258	248	136	
600	702	652	649	714	963	821	917	901	869	984	119	265	252	155	21
750	704	651	648	710	946	826	895	884	877	974	122	244	236	167	28
900	704	651	648	706	942	827	884	885	872	975	123	233	237	166	33
1050	706	652	648	704	943	826	871	884	872	983	120	219	236	168	40
1200	704	653	650	704	944	822	961	908	887	995	118	308	258	183	51
1350	709	655	650	704	948	818	972	928	920	988	109	317	278	216	40
1500	709	656	652	704	952	814	972	942	936	988	105	316	290	232	36
1650	709	658	654	704	959	804	968	974	963	993	95	310	320	259	34
1800	708	657	655	703	969	779	927	923	881	1001	71	270	268	178	32
1950		651	652	702	979		797	812	804	1010		146	160	102	31
2100			649	699	989			718	734	1018			69	35	29
2250				699					742					43	
2400				701					733					32	
2550				706					730					24	
2700				713					727					14	
2850															

DATA SHEET NO. 11 ... (CONTINUED)


TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan

NHTSA No. MC5200

Test Program: NCAP MDB Side Impact Test

Test Date: 1/24/12

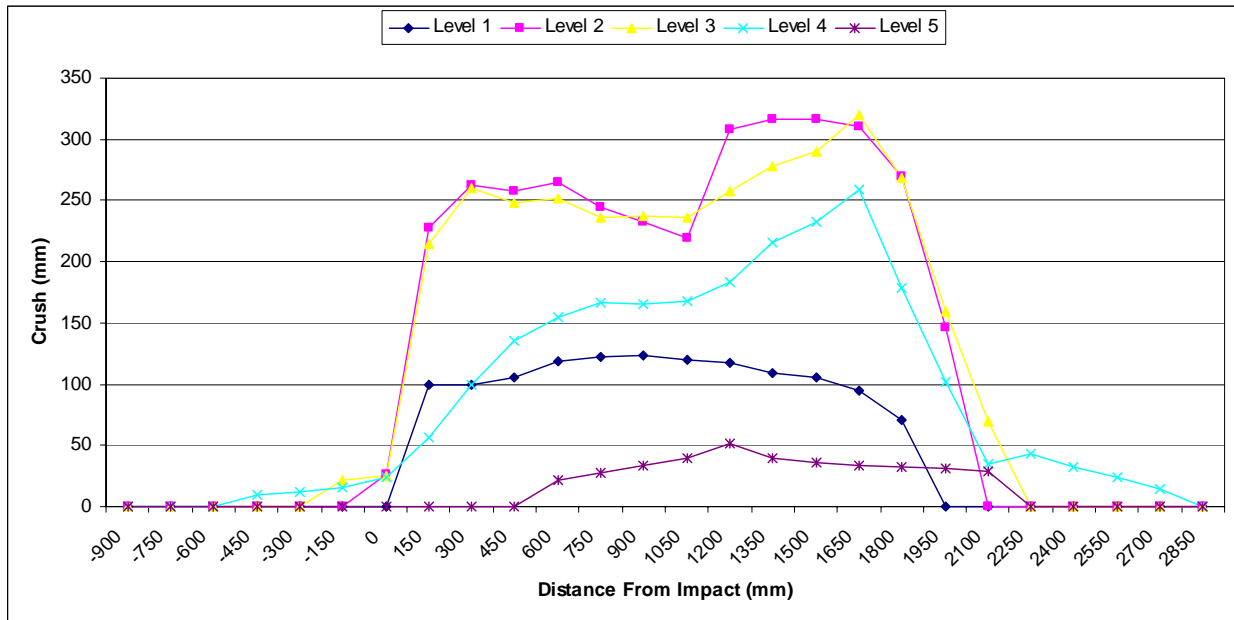

DATA SHEET NO. 12


MDB EXTERIOR STATIC CRUSH MEASUREMENTS

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan

NHTSA No. MC5200

Test Program: NCAP MDB Side Impact Test

Test Date: 1/24/12

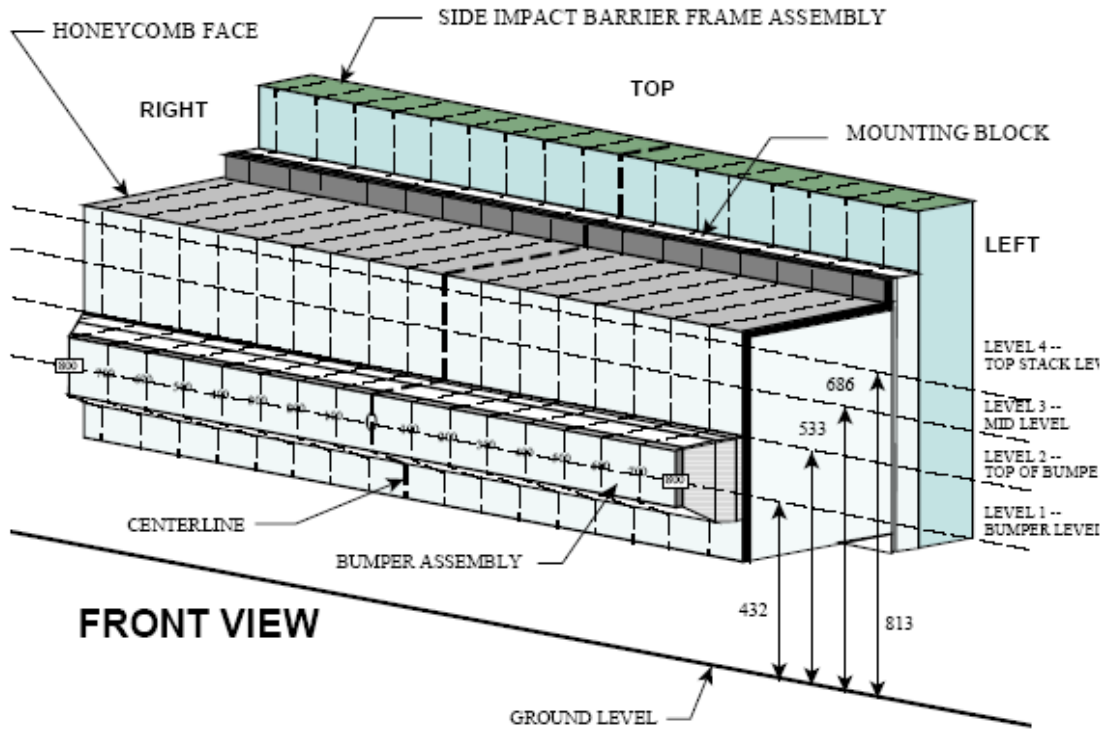

NOTE: Dimensions are shown in millimeters, mm

DEFORMABLE BARRIER STATIC CRUSH

Stack Level	Distance Right of Center								C/L	Distance Left of Center							
	800	700	600	500	400	300	200	100		100	200	300	400	500	600	700	800
1	187	153	146	141	139	133	129	124	119	116	109	106	100	97	94	93	108
2	97	87	77	64	51	47	57	60	48	43	49	52	50	49	55	48	52
3	37	2	9	17	27	57	64	44	28	24	15	15	14	17	22	32	86
4	41	0	-2	9	27	57	67	55	36	27	20	22	27	37	48	80	118

All dimensions in millimeters.

DATA SHEET NO. 13

FMVSS NO. 301 STATIC ROLLOVER RESULTS

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan

NHTSA No. MC5200

Test Program: NCAP MDB Side Impact Test

Test Date: 1/24/12

Temperature at Time of Impact: 12.2° C


Test Time: 1:44 PM

A. From impact until vehicle motion ceases: 0 oz.
(Maximum allowable = 1 oz.)

B. For the 5 minute period after motion ceases: 0 oz.
(Maximum allowable = 5 oz.)

C. For the following 25 minutes: 0 oz.
(Maximum allowable = 1 oz./minute)

D. Spillage Details: No spillage occurred

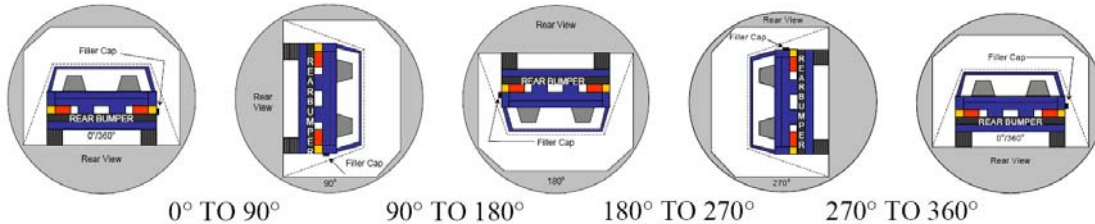

SOLVENT COLLECTION TIME TABLE IN SECONDS

Test Phase	Rotation Time	Hold Time	Total Time
0° To 90°	85	300	385
90° To 180°	82	300	382
180° To 270°	78	300	378
270° To 360°	80	300	380

FMVSS 301 SPILLAGE TABLE

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° To 90°	0			
90° To 180°	0			
180° To 270°	0			
270° To 360°	0			

SOLVENT SPILLAGE LOCATION TABLE

Test Phase	Spillage Location
0° To 90°	No Spillage Occurred
90° To 180°	No Spillage Occurred
180° To 270°	No Spillage Occurred
270° To 360°	No Spillage Occurred

DATA SHEET NO. 14


DUMMY/VEHICLE TEMPERATURE AND HUMIDITY STABILIZATION

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan

NHTSA No. MC5200

Test Program: NCAP MDB Side Impact Test

Test Date: 1/24/12

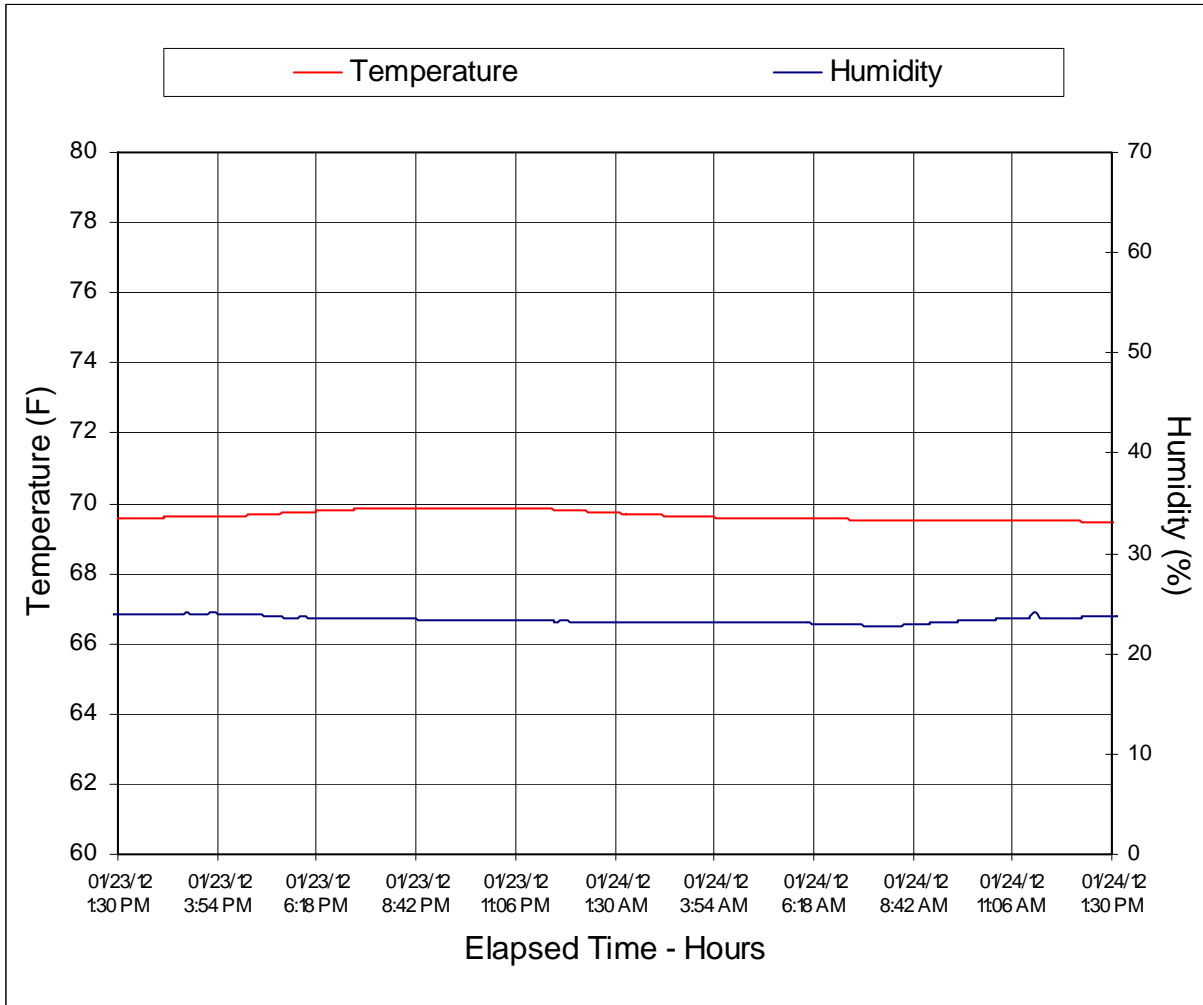

**APPENDIX A
PHOTOGRAPHS**

TABLE OF PHOTOGRAPHS

Figure		Page
1	As Delivered Right Front 3-4 View of Test Vehicle	A-1
2	As Delivered Left Rear 3-4 View of Test Vehicle	A-1
3	Pre-Test Frontal View of Test Vehicle	A-2
4	Post-Test Frontal View of Test Vehicle	A-2
5	Pre-Test Left Front 3-4 View of Test Vehicle	A-3
6	Post-Test Left Front 3-4 View of Test Vehicle	A-3
7	Pre-Test Left Side View of Test Vehicle	A-4
8	Post-Test Left Side View of Test Vehicle	A-4
9	Pre-Test Left Rear 3-4 View of Test Vehicle	A-5
10	Post-Test Left Rear 3-4 View of Impact Zone	A-5
11	Pre-Test Rear View of Test Vehicle	A-6
12	Post-Test Rear View of Test Vehicle	A-6
13	Pre-Test Right Side View of Test Vehicle	A-7
14	Post-Test Right Side View of Test Vehicle	A-7
15	Pre-Test Overhead View of Test Area	A-8
16	Post-Test Overhead View of Test Area	A-8
17	Pre-Test Left Side View of MDB Positioned Against Side of Test Vehicle	A-9
18	Pre-Test Right Side View of MDB Positioned Against Side of Test Vehicle	A-9
19	Pre-Test Close-Up View of Impact Point Target	A-10
20	Post-Test Close-Up View of Impact Point Target	A-10
21	Pre-Test Left Front Door Latch Close-Up	A-11
22	Post-Test Left Front Door Latch Close-Up	A-11
23	Pre-Test Left Rear Door Latch Close-Up	A-12
24	Post-Test Left Rear Door Latch Close-Up	A-12
25	Pre-Test Front Close-Up View of Driver Dummy	A-13
26	Post-Test Front Close-Up View of Driver Dummy	A-13
27	Pre-Test Left Side View of Driver Dummy Showing Belt and Chalking,	A-14
28	Pre-Test Left Side View of Driver Dummy Shoulder and Door Top View	A-14
29	Post-Test Left Side View of Driver Dummy Shoulder and Door Top View	A-15
30	Pre-Test Frontal View of Driver Seat Back Prior to Dummy Positioning	A-15
31	Pre-Test Frontal View of Driver Dummy Head and Shoulders in Relation to Head Restraint	A-16
32	Pre-Test Frontal View of Driver Seat Pan Prior to Dummy Positioning	A-16
33	Pre-Test Overhead View of Driver Dummy Thighs on Seat Pan	A-17
34	Pre-Test Placement of Driver Dummy's Feet	A-17
35	Pre-Test View of Belt Anchorage for Driver Dummy	A-18

TABLE OF PHOTOGRAPHS ... (CONTINUED)

Figure		Page
36	Pre-Test Left Side View of Steering Wheel	A-18
37	View of Disengaged Parking Brake	A-19
38	Pre-Test View of Parking Brake	A-19
39	Pre-Test Close-Up Left Side View of Driver Seat Track	A-20
40	Pre-Test Close-Up Left Side View of Driver Seat Back	A-20
41	Pre-Test Close-Up View of Driver Seat Back or Head Restraint	A-21
42	Pre-Test Driver Dummy and Door Clearance View	A-21
43	Post-Test Driver Dummy and Door Clearance View	A-22
44	Pre-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment	A-22
45	Post-Test Right Side View of Driver Dummy and Front Seat Occupant Compartment	A-23
46	Pre-Test Driver Inner Door Panel View	A-23
47	Post-Test Driver Inner Door Panel View	A-24
48	Post-Test Driver Dummy Close-Up Head Contact with Vehicle Interior View	A-24
49	Post-Test Driver Dummy Close-Up Head Contact with Side Airbag View	A-25
50	Post-Test Driver Dummy Close-Up Torso Contact with Vehicle Interior View	A-25
51	Post-Test Driver Dummy Close-Up Torso Contact with Side Airbag View	A-26
52	Post-Test Driver Dummy Close-Up Pelvis Contact with Vehicle Interior View	A-26
53	Post-Test Driver Dummy Close-Up Pelvis Contact with Side Airbag View	A-27
54	Pre-Test Left Side View of Rear Passenger Dummy Showing Belt, Chalking, and Contact Switches	A-27
55	Pre-Test Left Side View of Rear Passenger Dummy Shoulder and Door Top View	A-28
56	Post-Test Left Side View of Rear Passenger Dummy Shoulder and Door Top View	A-28
57	Pre-Test Frontal View of Rear Passenger Seat Back Prior to Dummy Positioning	A-29
58	Pre-Test Frontal View of Rear Passenger Dummy Head and Shoulders in Relation to Head Restraint	A-29
59	Pre-Test Overhead View of Rear Passenger Seat Pan Prior to Dummy Positioning	A-30
60	Pre-Test Overhead View of Rear Passenger Dummy Thighs on Seat Pan	A-30
61	Pre-Test View of Rear Passenger Dummy's Neck Showing Position of Adjustable Neck Bracket	A-31
62	Pre-Test View of Rear Passenger Dummy's Head Showing Dummy's Head is Level	A-31
63	Pre-Test Placement of Rear Passenger Dummy's Feet	A-32
64	Pre-Test View of Belt Anchorage for Rear Passenger Dummy	A-32
65	Pre-Test Close-Up Left Side View of Rear Passenger Seat Track	A-33
66	Pre-Test Close-Up Left Side View of Rear Passenger Seat Back	A-33
67	Pre-Test Close-Up View of Rear Passenger Seat Back or Head Restraint	A-34
68	Pre-Test Rear Passenger Dummy and Door Clearance View	A-34
69	Post-Test Rear Passenger Dummy and Door Clearance View	A-35
70	Pre-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment	A-35

TABLE OF PHOTOGRAPHS ... (CONTINUED)

Figure		Page
71	Post-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment	A-36
72	Pre-Test Rear Passenger Inner Door Panel View	A-36
73	Post-Test Rear Passenger Inner Door Panel	A-37
74	Post-Test Rear Passenger Dummy Close-Up Head Contact with Vehicle Interior View	A-37
75	Post-Test Rear Passenger Dummy Close-Up Head Contact with Side Airbag View	A-38
76	Post-Test Rear Passenger Dummy Close-Up Torso Contact with Vehicle Interior View	A-38
77	Post-Test Rear Passenger Dummy Close-Up Torso Contact with Side Airbag View	A-39
78	Post-Test Rear Passenger Dummy Close-Up Pelvis Contact with Vehicle Interior View	A-39
79	Post-Test Rear Passenger Dummy Close-Up Pelvis Contact with Side Airbag View	A-40
80	Pre-Test View of Fuel Filler Cap or Fuel Filler Neck	A-40
81	Post-Test View of Fuel Filler Cap or Fuel Filler Neck	A-41
82	Pre-Test Front View of MDB Impactor Face	A-41
83	Post-Test Front View of MDB Impactor Face	A-42
84	Pre-Test Top View of MDB Impactor Face	A-42
85	Post-Test Top View of MDB Impactor Face	A-43
86	Pre-Test Left Side View of MDB Impactor Face	A-43
87	Post-Test Left Side View of MDB Impactor Face	A-44
88	Pre-Test Right Side View of MDB Impactor Face	A-44
89	Post-Test Right Side View of MDB Impactor Face	A-45
90	Close-Up View of Vehicle's Certification Label	A-45
91	Close-Up View of Vehicle's Tire Information Placard or Label	A-46
92	Pre-Test Ballast View	A-46
93	Post-Test Primary and Redundant Speed Trap Read-Out	A-47
94	FMVSS No. 301 Rollover 0 Degrees	A-47
95	FMVSS No. 301 Rollover 90 Degrees	A-48
96	FMVSS No. 301 Rollover 180 Degrees	A-48
97	FMVSS No. 301 Rollover 270 Degrees	A-49
98	FMVSS No. 301 Rollover 360 Degrees	A-49
99	Impact Event	A-50
100	Monroney Label	A-50
101	Driver Head Restraint Use and Adjustment Information from Vehicle Owner's Manual	A-51
102	Left Rear Passenger Head Restraint Use and Adjustment Information from Vehicle Owner's Manual	A-51



FIGURE 1. As-Delivered Right Front $\frac{3}{4}$ View of Test Vehicle



FIGURE 2. As-Delivered Left Rear $\frac{3}{4}$ View of Test Vehicle



FIGURE 3. Pre-Test Frontal View of Test Vehicle



FIGURE 4. Post-Test Frontal View of Test Vehicle



FIGURE 5. Pre-Test Left Front $\frac{3}{4}$ View of Test Vehicle



FIGURE 6. Post-Test Left Front $\frac{3}{4}$ View of Test Vehicle



FIGURE 7. Pre-Test Left Side View of Test Vehicle



FIGURE 8. Post-Test Left Side View of Test Vehicle



FIGURE 9. Pre-Test Left Rear 3/4 View of Test Vehicle



FIGURE 10. Post-Test Left Rear 3/4 View of Impact Zone



FIGURE 11. Pre-Test Rear View of Test Vehicle



FIGURE 12. Post-Test Rear View of Test Vehicle



FIGURE 13. Pre-Test Right Side View of Test Vehicle



FIGURE 14. Post-Test Right Side View of Test Vehicle



FIGURE 15. Pre-Test Overhead View of Test Area

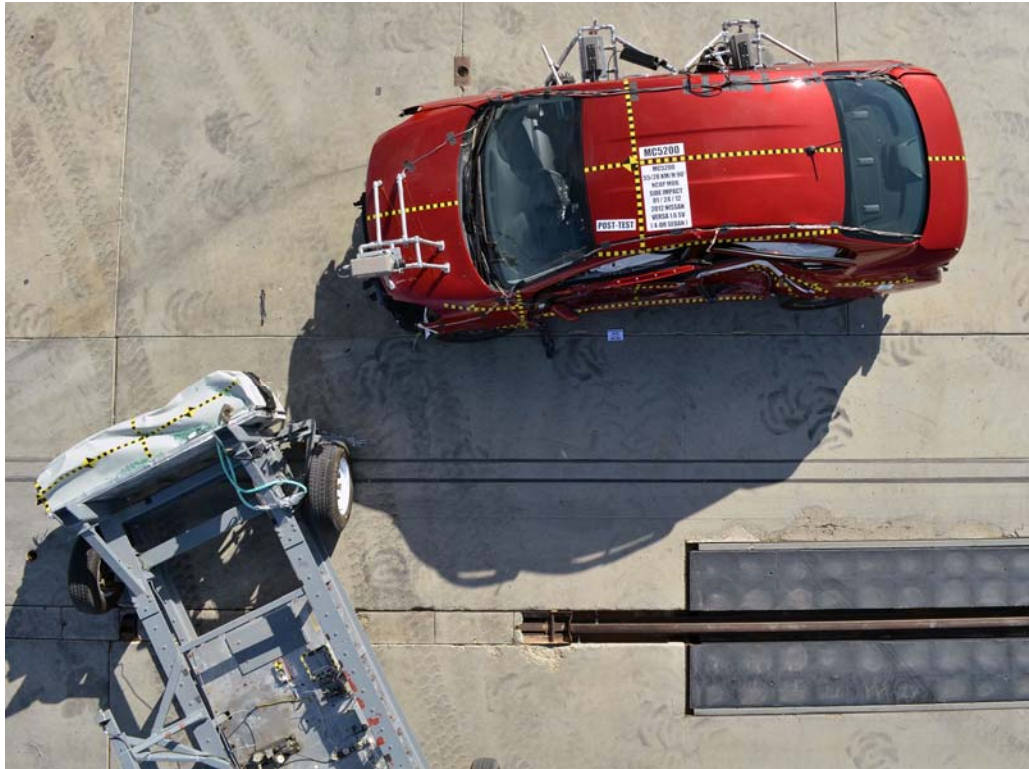


FIGURE 16. Post-Test Overhead View of Test Area



FIGURE 17. Pre-Test Left Side View of MDB Positioned
Against Side of Test Vehicle



FIGURE 18. Pre-Test Right Side View of MDB Positioned
Against Side of Test Vehicle



FIGURE 19. Pre-Test Close-Up View of Impact Point Target



FIGURE 20. Post-Test Close-Up View of Impact Point Target
Showing Impact Point Location



FIGURE 21. Pre-Test Left Front Door Latch Close-Up



FIGURE 22. Post-Test Left Front Door Latch Close-Up



FIGURE 23. Pre-Test Left Rear Door Latch Close-Up



FIGURE 24. Post-Test Left Rear Door Latch Close-Up



FIGURE 25. Pre-Test Front Close-Up View of Driver Dummy



FIGURE 26. Post-Test Front Close-Up View of Driver Dummy



FIGURE 27. Pre-Test Left Side View of Driver Dummy
Showing Belt, Chalking, and Contact Switches



FIGURE 28. Pre-Test Left Side View of Driver Dummy Shoulder and Door Top View



FIGURE 29. Post-Test Left Side View of Driver Dummy Shoulder and Door Top View

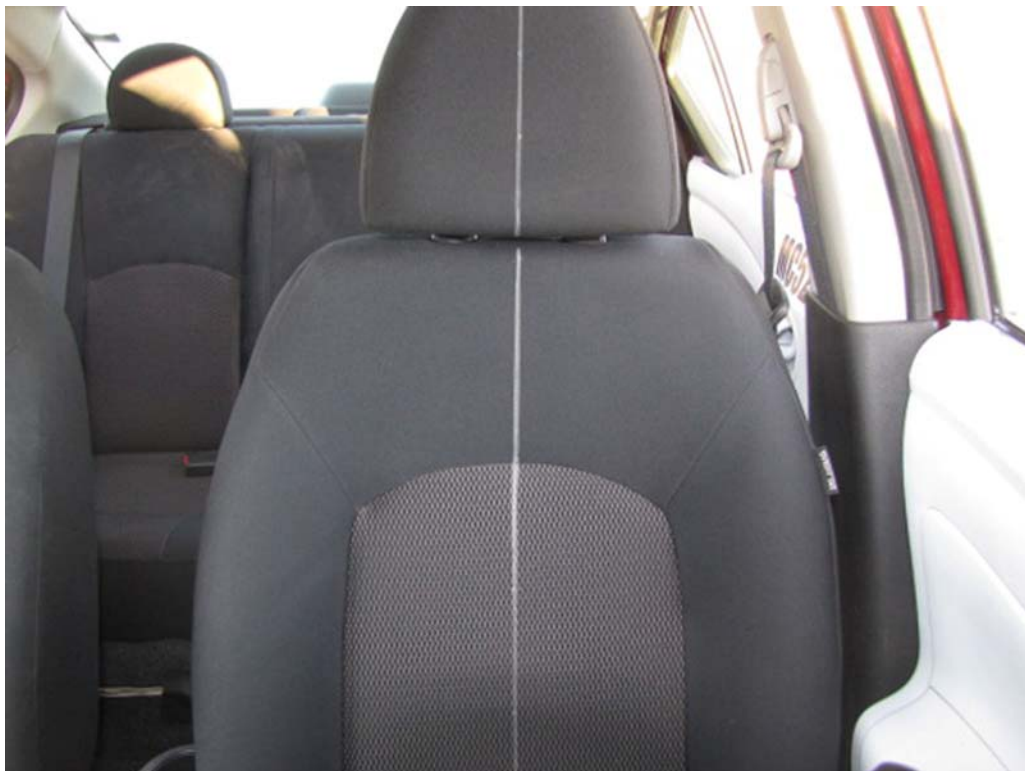


FIGURE 30. Pre-Test Frontal View of Driver Seat Back Prior to Dummy Positioning



FIGURE 31. Pre-Test Frontal View of Driver Dummy Head and Shoulders in Relation to Head Restraint



FIGURE 32. Pre-Test Frontal View of Driver Seat Pan Prior to Dummy Positioning



FIGURE 33. Pre-Test Overhead View of Driver Dummy Thighs on Seat Pan



FIGURE 34. Pre-Test Placement of Driver Dummy's Feet



FIGURE 35. Pre-Test View of Belt Anchorage for Driver Dummy



FIGURE 36. Pre-Test Left Side View of Steering Wheel

Photograph Not Available

FIGURE 37. View of Disengaged Parking Brake



FIGURE 38. Pre-Test View of Parking Brake



FIGURE 39. Pre-Test Close-Up Left Side View of Driver Seat Track



FIGURE 40. Pre-Test Close-Up Left Side View of Driver Seat Back



FIGURE 41. Pre-Test Close-Up View of Driver Seat Back or Head Restraint



FIGURE 42. Pre-Test Driver Dummy and Door Clearance View



FIGURE 43. Post-Test Driver Dummy and Door Clearance View



FIGURE 44. Pre-Test Right Side View of Driver Dummy and Front Seat Occupant Compartment



FIGURE 45. Post-Test Right Side View of Driver Dummy and Front Seat Occupant Compartment



FIGURE 46. Pre-Test Driver Inner Door Panel View



FIGURE 47. Post-Test Driver Inner Door Panel View



FIGURE 48. Post-Test Driver Dummy Close-Up Head Contact with Vehicle Interior View



FIGURE 49. Post-Test Driver Dummy Close-Up Head Contact with Side Airbag View



FIGURE 50. Post-Test Driver Dummy Close-Up Torso Contact with Vehicle Interior View



FIGURE 51. Post-Test Driver Dummy Close-Up Torso Contact with Side Airbag View



FIGURE 52. Post-Test Driver Dummy Close-Up Pelvis Contact with Vehicle Interior View



FIGURE 53. Post-Test Driver Dummy Close-Up Pelvis Contact with Side Airbag View



FIGURE 54. Pre-Test Left Side View of Rear Passenger Dummy Showing Belt, Chalking, and Contact Switches



FIGURE 55. Pre-Test Left Side View of Rear Passenger Dummy
Shoulder and Door Top View



FIGURE 56. Post-Test Left Side View of Rear Passenger Dummy
Shoulder and Door Top View



FIGURE 57. Pre-Test Frontal View of Rear Passenger Seat Back
Prior to Dummy Positioning



FIGURE 58. Pre-Test Frontal View of Rear Passenger Dummy
Head and Shoulders in Relation to Head Restraint



FIGURE 59. Pre-Test Overhead View of Rear Passenger Seat Pan Prior to Dummy Positioning



FIGURE 60. Pre-Test Overhead View of Rear Passenger Dummy Thighs on Seat Pan



FIGURE 61. Pre-Test View of Rear Passenger Dummy's Neck
Showing Position of Adjustable Neck Bracket

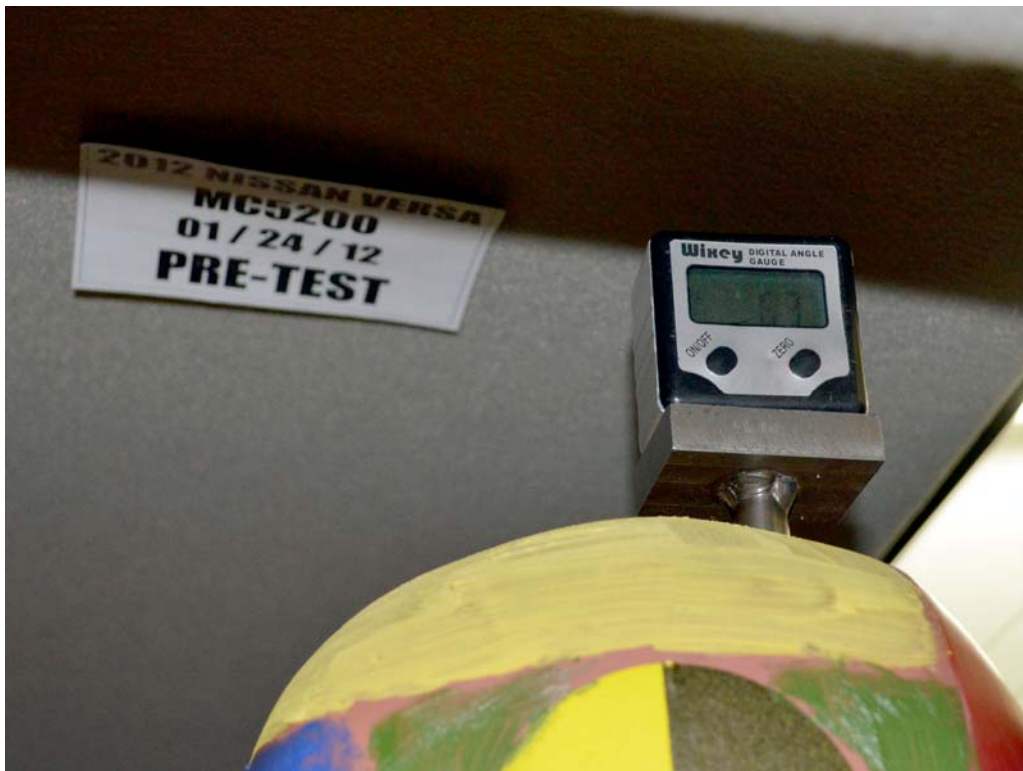


FIGURE 62. Pre-Test View of Rear Passenger Dummy's Head
Showing Dummy's Head is Level



FIGURE 63. Pre-Test Placement of Rear Passenger Dummy's Feet



FIGURE 64. Pre-Test View of Belt Anchorage for Rear Passenger Dummy



FIGURE 65. Pre-Test Close-Up Left Side View of Rear Passenger Seat Track



FIGURE 66. Pre-Test Close-Up Left Side View of Rear Passenger Seat Back



FIGURE 67. Pre-Test Close-Up View of Rear Passenger Seat Back or Head Restraint

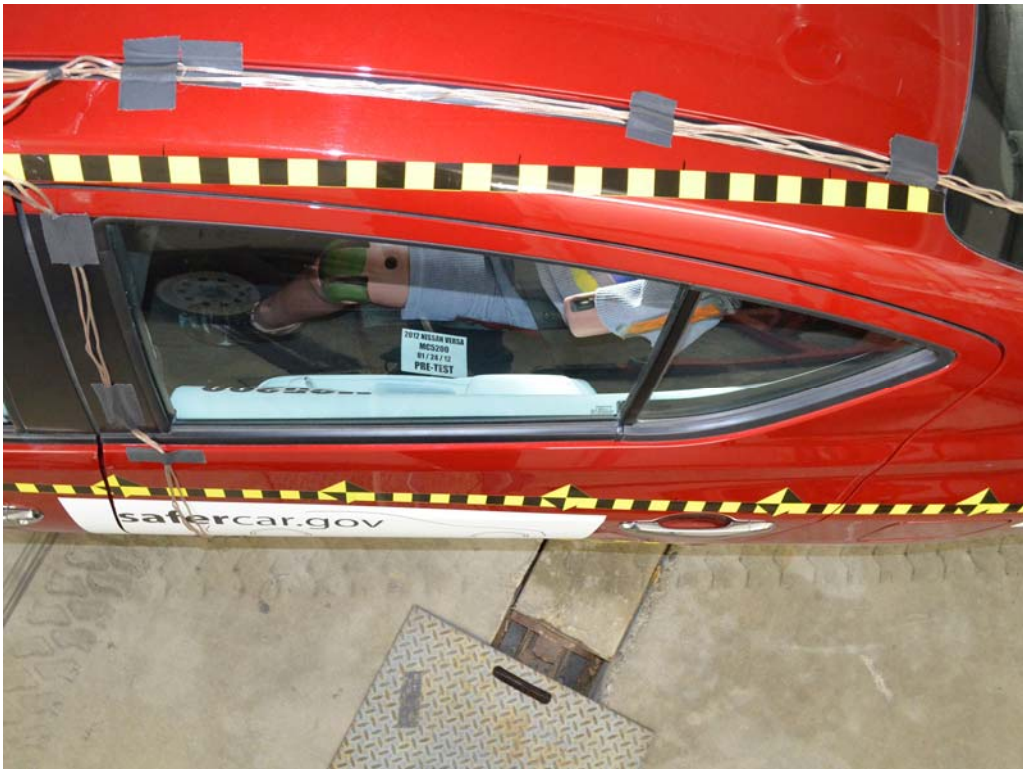


FIGURE 68. Pre-Test Rear Passenger Dummy and Door Clearance View



FIGURE 69. Post-Test Rear Passenger Dummy and Door Clearance View



FIGURE 70. Pre-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment



FIGURE 71. Post-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment



FIGURE 72. Pre-Test Rear Passenger Inner Door Panel View



FIGURE 73. Post-Test Rear Passenger Inner Door Panel View



FIGURE 74. Post-Test Rear Passenger Dummy Close-Up
Head Contact with Vehicle Interior View



FIGURE 75. Post-Test Rear Passenger Dummy Close-Up
Head Contact with Side Airbag View



FIGURE 76. Post-Test Rear Passenger Dummy Close-Up
Torso Contact with Vehicle Interior View

Photograph Not Applicable

Vehicle Not Equipped With Rear Passenger Side Airbag

FIGURE 77. Post-Test Rear Passenger Dummy Close-Up
Torso Contact with Side Airbag View



FIGURE 78. Post-Test Rear Passenger Dummy Close-Up
Pelvis Contact with Vehicle Interior View

Photograph Not Applicable

Vehicle Not Equipped With Rear Passenger Side Airbag

FIGURE 79. Post-Test Rear Passenger Dummy Close-Up
Pelvis Contact with Side Airbag View



FIGURE 80. Pre-Test View of Fuel Filler Cap



FIGURE 81. Post-Test View of Fuel Filler Cap



FIGURE 82. Pre-Test Front View of MDB Impactor Face



FIGURE 83. Post-Test Front View of MDB Impactor Face



FIGURE 84. Pre-Test Top View of MDB Impactor Face



FIGURE 85. Post-Test Top View of MDB Impactor Face



FIGURE 86. Pre-Test Left Side View of MDB Impactor Face



FIGURE 87. Post-Test Left Side View of MDB Impactor Face



FIGURE 88. Pre-Test Right Side View of MDB Impactor Face



FIGURE 89. Post-Test Right Side View of MDB Impactor Face



FIGURE 90. Close-Up View of Vehicle's Certification Label

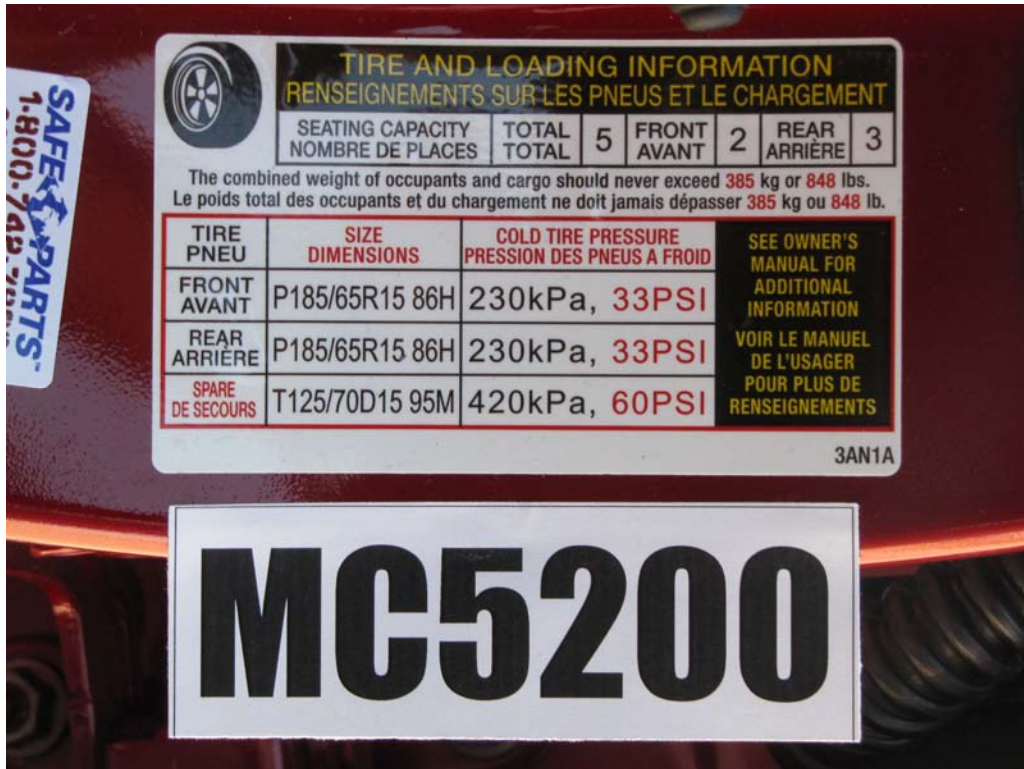


FIGURE 91. Close-Up View of Vehicle's Tire Information Placard



FIGURE 92. Pre-Test Ballast View



FIGURE 93. Post-Test Primary and Redundant Speed Trap Read-Out



FIGURE 94. FMVSS No. 301 Static Rollover 0 Degrees



FIGURE 95. FMVSS No. 301 Static Rollover 90 Degrees

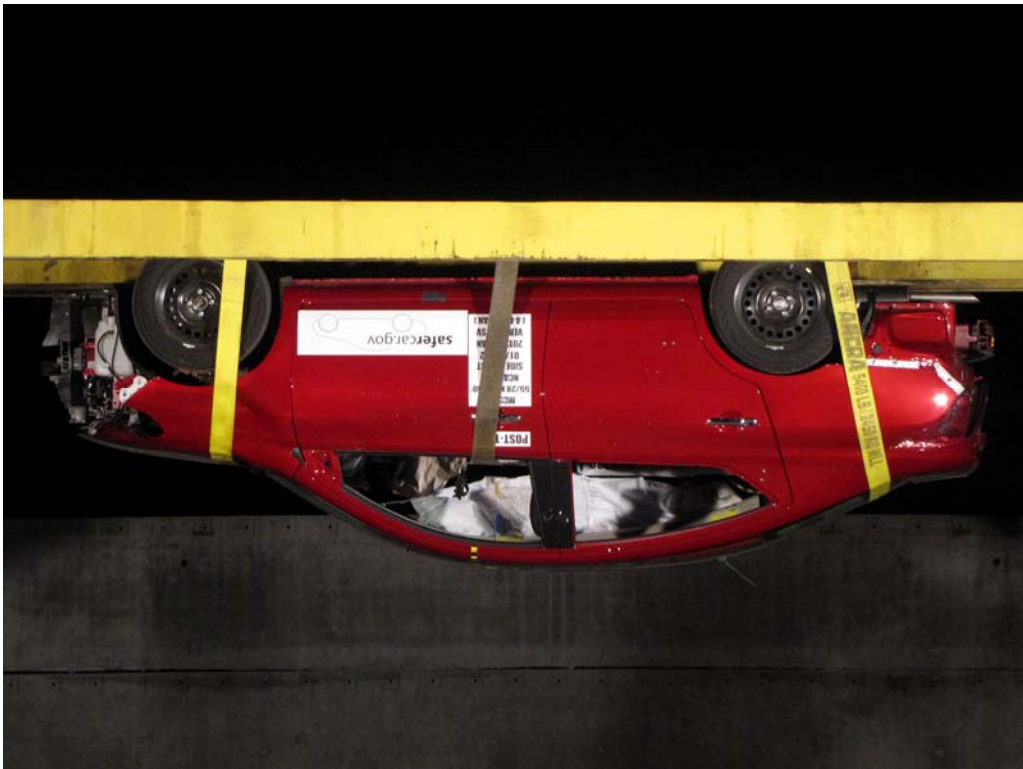


FIGURE 96. FMVSS No. 301 Static Rollover 180 Degrees

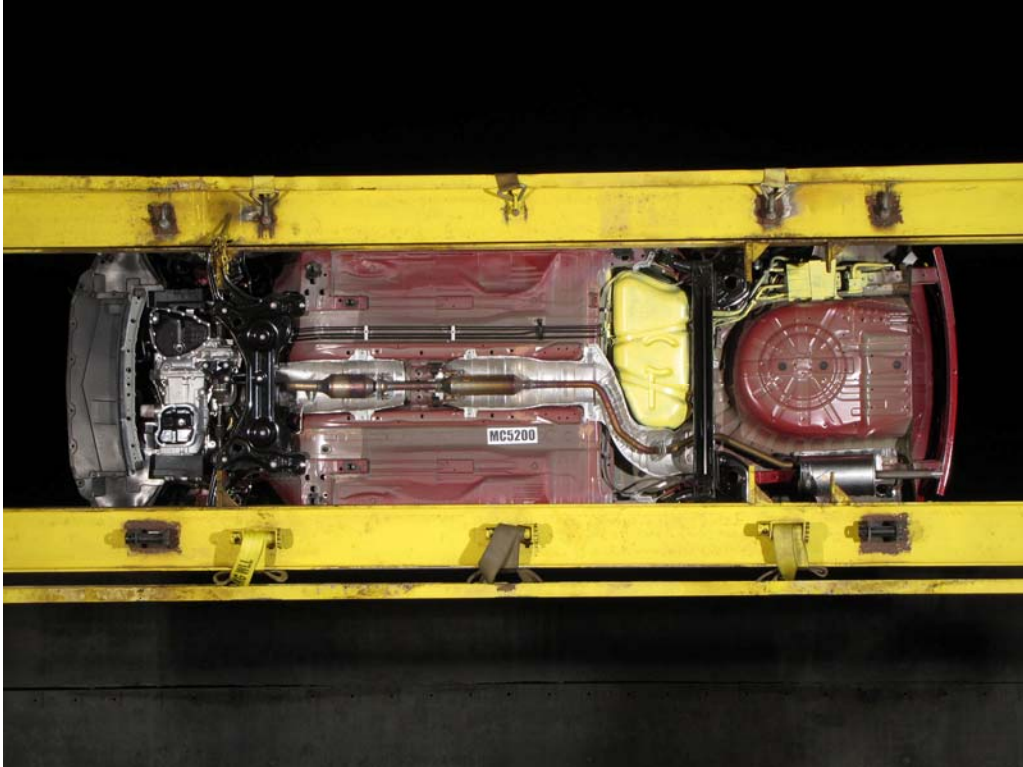


FIGURE 97. FMVSS No. 301 Static Rollover 270 Degrees

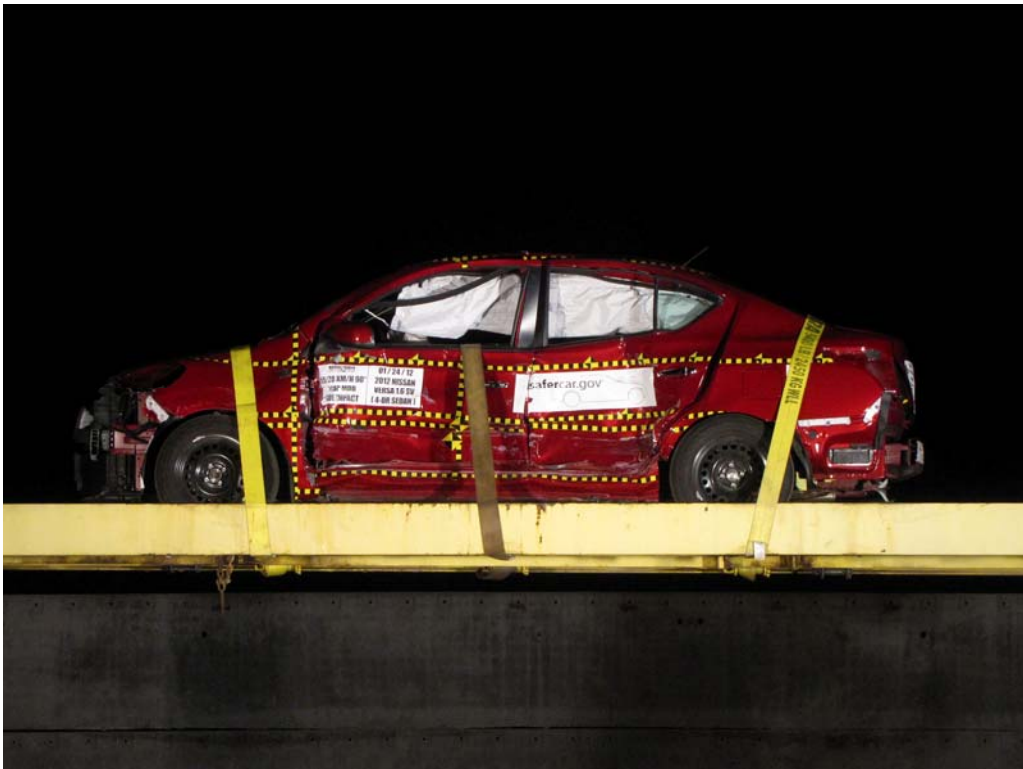



FIGURE 98. FMVSS No. 301 Static Rollover 360 Degrees



FIGURE 99. Impact Event



2012 VERSA 1.6 SV SDN

A WHOLE NEW LEVEL OF COMFORT & CONVENIENCE

Standard Equipment Included at No Extra Charge

MECHANICAL & PERFORMANCE
 1.8L DOHC 16-Valve 4-Cylinder Engine
 Next Generation Xtronic CVT®
 (Continuously Variable Transmission)
 Front and Rear Stabilizer Bars
 Power-Assisted Ventilated Front Disc /
 Rear Drum Brakes
 15" Steel Wheels w/ Full Wheel Covers

SAFETY & SECURITY
 Nissan Advanced Air Bag System (AABS) w/
 Dual Stage Supplemental Front Air Bags
 Front Seat-Mounted Side Impact
 Supplemental Air Bags
 Roof-Mounted Curtain Side Impact
 Supplemental Air Bags
 Lower Anchors and Tethers for Children
 (LATCH)
 Anti-Lock Braking System (ABS)
 Traction Control System (TCS)
 Vehicle Dynamic Control (VDC)
 Electronic Brake Force Distribution (EBD)
 and Brake Assist
 Tire Pressure Monitoring System (TPMS)

COMFORT & CONVENIENCE
 Air Conditioning
 6-Way Adjustable Driver's Seat
 Upgraded Cloth
 AM/FM/CD/Aux in Audio System w/ 4 Speakers
 Fine Vision Gauges and Trip Computer
 Power Windows w/ Driver's 1-Touch Auto-Down
 Power Door Locks w/ Auto-Locking Feature
 Remote Keyless Entry
 Cruise Control
 Seven-Ton Accents on Steering Wheel,
 Dual Front and Rear Cupholders,
 Remote Trunk Release and Trunk Light

EXTERIOR
 Chrome Front Grille and Door Handles
 Chrome Multi-Reflector Halogen Headlights
 Body-Color Power Sideview Mirrors
 Body-Color Front and Rear Fascias

Manufacturer's Suggested
 Retail Base Price: \$14,590.00
 Options Included by Manufacturer
 CARPETED FLOOR AND TRUNK MATS: 170.00
 Destination Charge: 700.00
 Total* \$15,460.00

*Does not include dealer installed options and accessories, local taxes or license fees. This label has been applied pursuant to federal law. Do not remove prior to delivery to the ultimate purchaser.

EPA Fuel Economy Estimates

CITY MPG 30 <small>Expected range for most drivers 24 to 36 MPG</small>	Estimated Annual Fuel Cost \$1,364 <small>Based on 15,000 miles @ \$3.00 per gallon</small>	HIGHWAY MPG 38 <small>Expected range for most drivers 31 to 45 MPG</small>
Combined Fuel Economy 33 <small>AT COMPACT CARS</small>		

See the FREE Fuel Economy Guide at dealers or www.fueleconomy.gov

GOVERNMENT SAFETY RATINGS		DELIVERY
Frontal Crash <small>Star ratings based on the risk of injury in a frontal impact. Partial ratings should ONLY be compared to other vehicles of similar size and weight.</small>	Driver To Be Rated Passenger To Be Rated	VEHICLE COLOR: EXT: RED DRCK INT: CHARCOAL FINAL ASSEMBLY POINT: AGLIAS/ADV JMEJX TRANSPORT METHOD: TRUCK DEALER: POWER NISSAN OF SOUTH BAY 14610 HENDRY AVE HAWTHORNE, CA 90250
Side Crash <small>Star ratings based on the risk of injury in a side impact.</small>	Front seat To Be Rated Rear seat To Be Rated	
Rollover <small>Star ratings based on the risk of rollover in a single vehicle crash.</small>	To Be Rated	

Star ratings range from 1 to 5 stars (★ ★ ★ ★ ★), with 5 being the highest. Source: National Highway Traffic Safety Administration (NHTSA).
www.safercar.gov or 1-888-327-4236

This Vehicle qualifies for Nissan's
Security+Plus Vehicle Protection Plan
The only service agreement backed by Nissan!
 Ask your dealer for details, or call 1-800-NISSAN-1 for more information.

VIN: 3N1CN7AP3CLB12860
 EMS: 60 STATE EMISSIONS
 MDL: 11212-81260 NAC-G
 OPT: C-C03J93
 20110803025617A5090A

FIGURE 100. Monroney Label

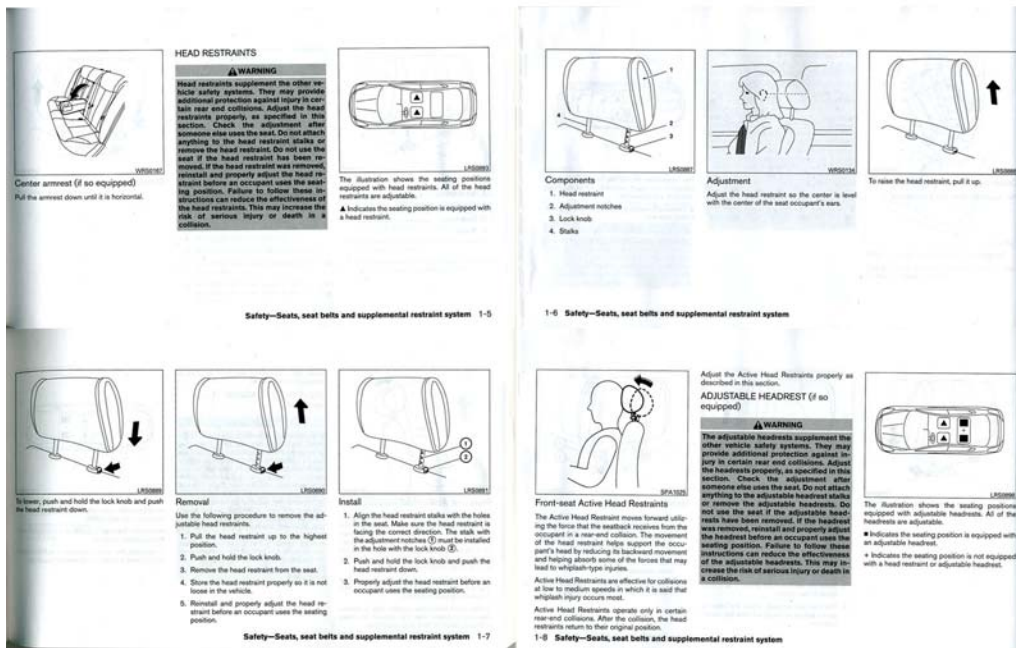


FIGURE 101. Driver Head Restraint Use and Adjustment Information from Vehicle Owner's Manual

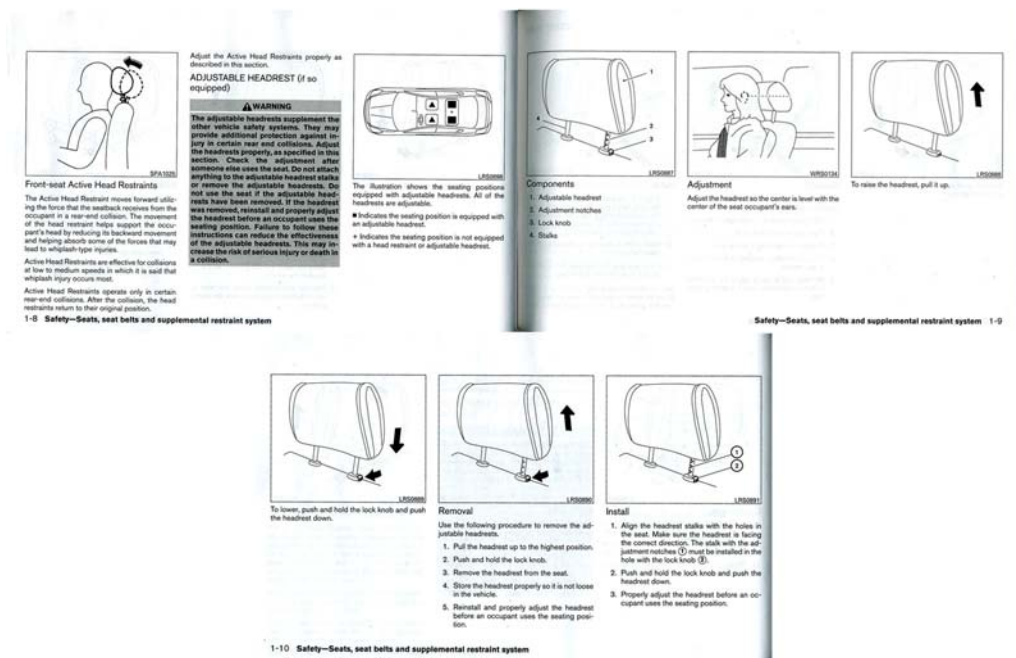


FIGURE 102. Left Rear Passenger Head Restraint Use and Adjustment Information from Vehicle Owner's Manual

APPENDIX B
DUMMY RESPONSE DATA

TABLE OF DATA PLOTS

Plot		Page
1	Driver Head Acceleration (X) Primary vs. Time	B-1
2	Driver Head Acceleration (Y) Primary vs. Time	B-1
3	Driver Head Acceleration (Z) Primary vs. Time	B-1
4	Driver Head Resultant Acceleration Primary vs. Time	B-1
5	Driver Upper Thorax Rib Deflection (Y) vs. Time	B-2
6	Driver Middle Thorax Rib Deflection (Y) vs. Time	B-2
7	Driver Lower Thorax Rib Deflection (Y) vs. Time	B-2
8	Driver Thorax Rib Deflection Maximum vs. Time	B-2
9	Driver Anterior Abdominal Force (Y) vs. Time	B-3
10	Driver Middle Abdominal Force (Y) vs. Time	B-3
11	Driver Posterior Abdominal Force (Y) vs. Time	B-3
12	Driver Total Abdominal Force (Y) vs. Time	B-3
13	Driver Pubic Symphysis Force (Y) vs. Time	B-4
14	Passenger Head Acceleration (X) vs. Time Primary	B-5
15	Passenger Head Acceleration (Y) vs. Time Primary	B-5
16	Passenger Head Acceleration (Z) vs. Time Primary	B-5
17	Passenger Head Resultant Acceleration Primary vs. Time	B-5
18	Passenger Lower Spine T12 Acceleration (X) vs. Time	B-6
19	Passenger Lower Spine T12 Acceleration (Y) vs. Time	B-6
20	Passenger Lower Spine T12 Acceleration (Z) vs. Time	B-6
21	Passenger Lower Spine T12 Resultant Acceleration vs. Time	B-6
22	Passenger Iliac Force on Impact Side (Y) vs. Time	B-7
23	Passenger Acetabulum Force on Impact Side (Y) vs. Time	B-7
24	Passenger Total Pelvic Force on Impact Side (Y) vs. Time	B-7

The following additional data for this test can be obtained from the Research and Development section of the NHTSA website (www.NHTSA.dot.gov)

Additional Driver & Passenger Dummy Instrumentation Data

Driver Lower Spine T12 Acceleration (X)
Driver Lower Spine T12 Acceleration (Y)
Driver Lower Spine T12 Acceleration (Z)
Passenger Upper Thorax Rib Deflection (Y)
Passenger Middle Thorax Rib Deflection (Y)
Passenger Lower Thorax Rib Deflection (Y)

Passenger Upper Abdomen Rib Deflection (Y)
Passenger Lower Abdomen Rib Deflection (Y)
Driver Head Acceleration Redundant (X)
Driver Head Acceleration Redundant (Y)
Driver Head Acceleration Redundant (Z)
Passenger Head Acceleration Redundant (X)
Passenger Head Acceleration Redundant (Y)
Passenger Head Acceleration Redundant (Z)

Vehicle Instrumentation Data

Vehicle Center of Gravity Acceleration (X)
Vehicle Center of Gravity Acceleration (Y)
Vehicle Center of Gravity Acceleration (Z)
Right Side Sill at Front Seat Acceleration (X)
Right Side Sill at Front Seat Acceleration (Y)
Right Side Sill at Front Seat Acceleration (Z)
Right Side Sill at Rear Seat Acceleration (X)
Right Side Sill at Rear Seat Acceleration (Y)
Right Side Sill at Rear Seat Acceleration (Z)
Left Side Sill at Front Seat Acceleration (Y)
Left Side Sill at Rear Seat Acceleration (Y)
Lower A-Post Acceleration (Y)
Middle A-Post Acceleration (Y)
Lower B-Post Acceleration (Y)
Middle B-Post Acceleration (Y)
Front Seat Track Acceleration (Y)
Rear Seat Structure Acceleration (Y)
Right Rear Occupant Compartment Acceleration (Y)
Engine Block (X)
Engine Block (Y)
Rear Floorpan Above Axle Acceleration (X)
Rear Floorpan Above Axle Acceleration (Y)
Rear Floorpan Above Axle Acceleration (Z)

MDB Instrumentation Data

MDB Center of Gravity Acceleration (X)

MDB Center of Gravity Acceleration (Y)

MDB Center of Gravity Acceleration (Z)

MDB Rear Acceleration (X)


MDB Rear Acceleration (Y)

Left MDB Contact Switch


Right MDB Contact Switch

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan
 Test Program: 61 km/h (38 mph) Side Impact NCAP 27° Moving Deformable Barrier Test


NHTSA No.: MC5200
 Test Date: 1/24/12

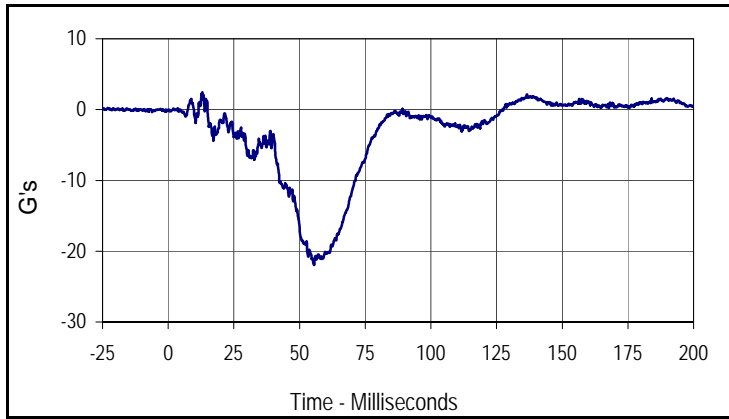


Curve Description			
Driver Head Acceleration X Primary			
Plot No.	Type	SAE Class	Units
001	FIL	1000	G's
Max	Time	Min	Time
2.5	13.0	-21.9	55.5

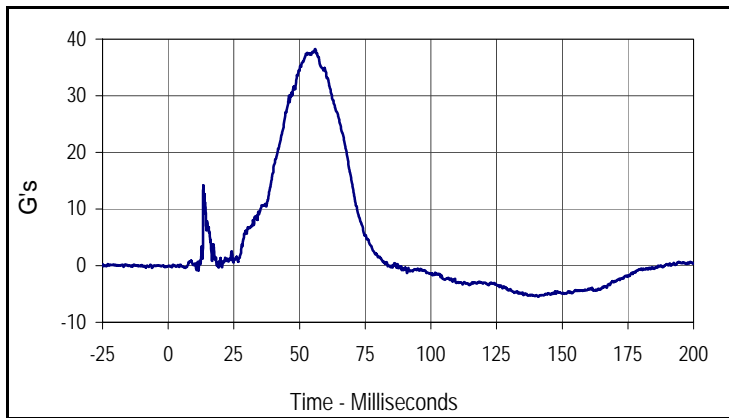

Curve Description			
Driver Head Acceleration Y Primary			
Plot No.	Type	SAE Class	Units
002	FIL	1000	G's
Max	Time	Min	Time
38.3	56.0	-5.5	140.9

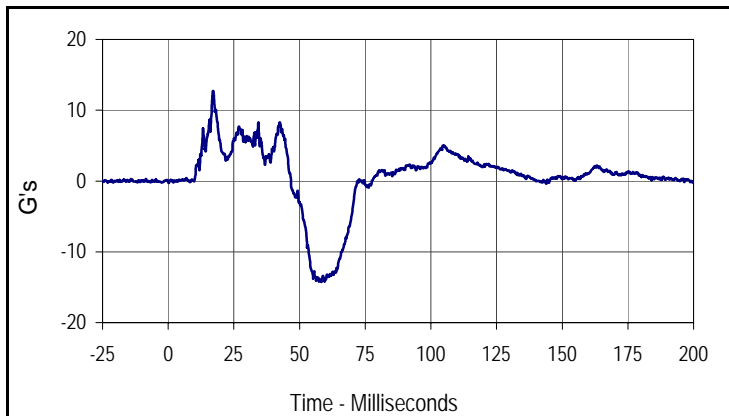


Curve Description			
Driver Head Acceleration Z Primary			
Plot No.	Type	SAE Class	Units
003	FIL	1000	G's
Max	Time	Min	Time
12.7	17.1	-14.3	58.3

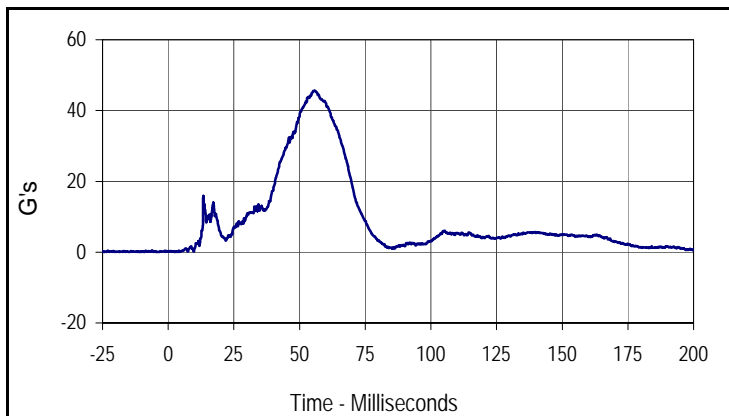


Curve Description			
Driver Head Resultant Acceleration Primary			
Plot No.	Type	SAE Class	Units
004	RES	1000	G's
Max	Time	Min	Time
45.6	55.9	0.0	3.8

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan
 Test Program: 61 km/h (38 mph) Side Impact NCAP 27° Moving Deformable Barrier Test


NHTSA No.: MC5200
 Test Date: 1/24/12

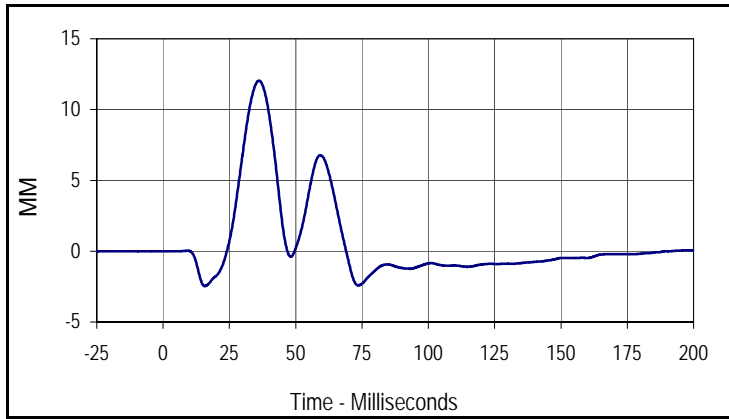


Curve Description			
Driver Upper Thorax Rib Deflection Y			
Plot No.	Type	SAE Class	Units
005	FIL	180	MM
Max	Time	Min	Time
12.0	36.2	-2.5	15.7

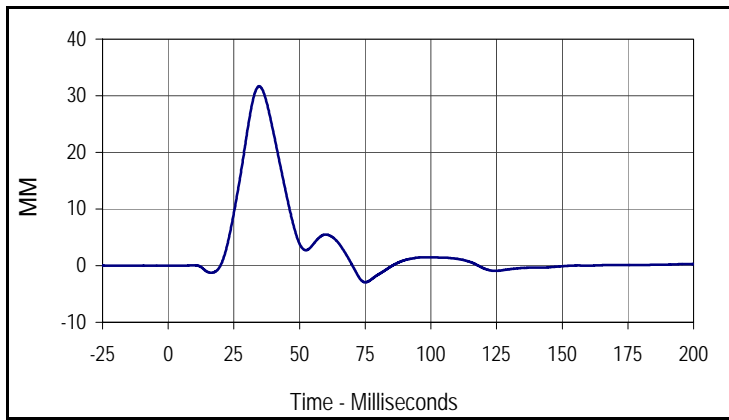

Curve Description			
Driver Middle Thorax Rib Deflection Y			
Plot No.	Type	SAE Class	Units
006	FIL	180	MM
Max	Time	Min	Time
31.7	34.6	-2.9	75.0

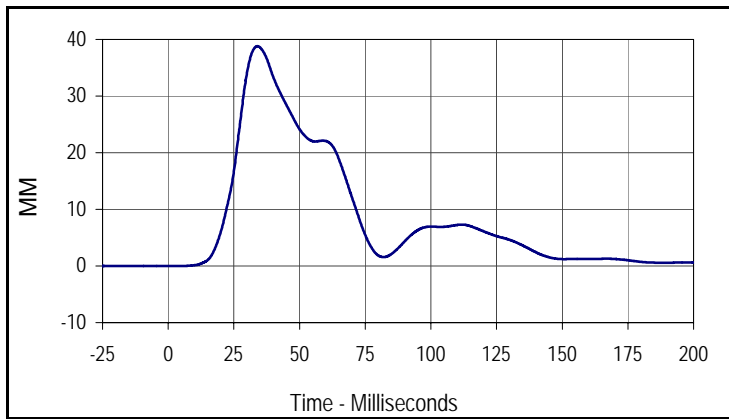


Curve Description			
Driver Lower Thorax Rib Deflection Y			
Plot No.	Type	SAE Class	Units
007	FIL	180	MM
Max	Time	Min	Time
38.8	34.0	0.0	2.8

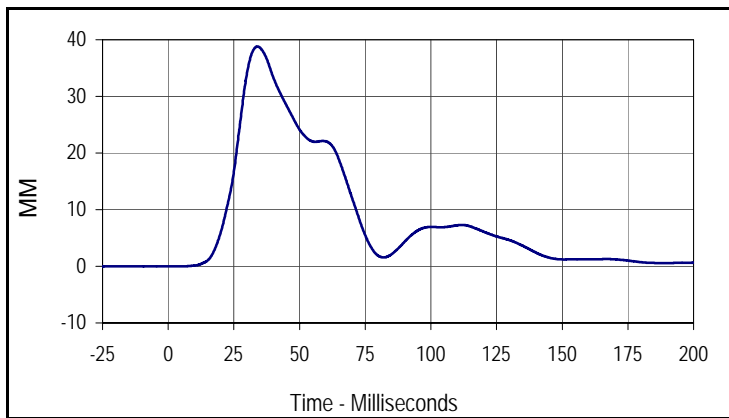


Curve Description			
Driver Thorax Rib Deflection Maximum			
Plot No.	Type	SAE Class	Units
010	FIL	180	MM
Max	Time	Min	Time
38.8	34.0	0.0	2.8

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan
 Test Program: 61 km/h (38 mph) Side Impact NCAP 27° Moving Deformable Barrier Test


NHTSA No.: MC5200
 Test Date: 1/24/12

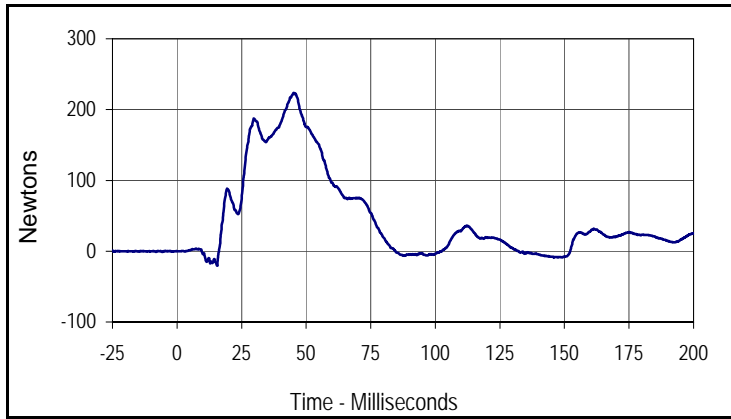


Curve Description			
Driver Anterior Abdominal Force Y			
Plot No.	Type	SAE Class	Units
008	FIL	600	Newtons
Max	Time	Min	Time
223.8	45.2	-20.6	15.5

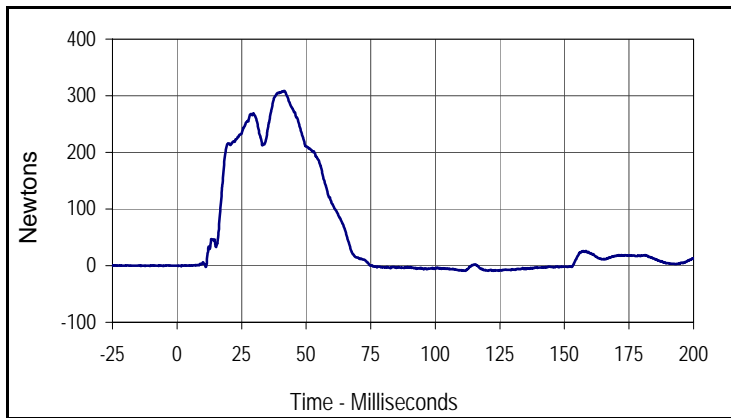

Curve Description			
Driver Middle Abdominal Force Y			
Plot No.	Type	SAE Class	Units
009	FIL	600	Newtons
Max	Time	Min	Time
308.7	41.5	-9.2	120.5

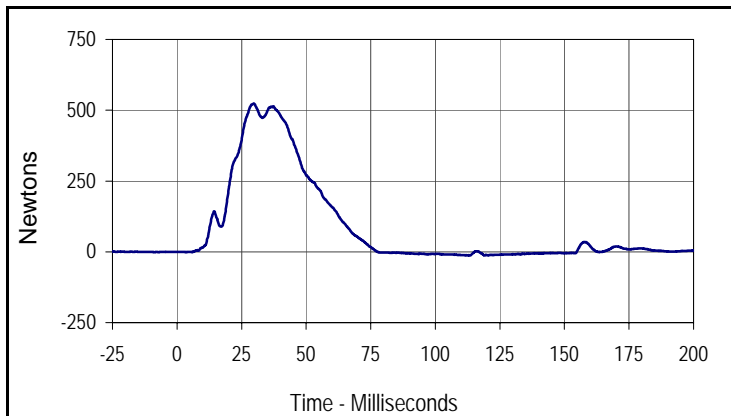


Curve Description			
Driver Posterior Abdominal Force Y			
Plot No.	Type	SAE Class	Units
011	FIL	600	Newtons
Max	Time	Min	Time
523.9	29.7	-13.3	113.4

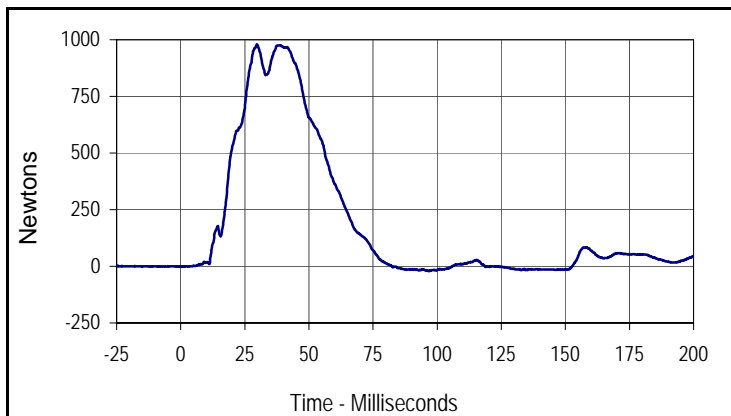

Curve Description			
Driver Total Abdominal Force			
Plot No.	Type	SAE Class	Units
012	SUM	600	Newtons
Max	Time	Min	Time
979.6	29.7	-21.0	96.8

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan
 Test Program: 61 km/h (38 mph) Side Impact NCAP 27° Moving Deformable Barrier Test


NHTSA No.: MC5200
 Test Date: 1/24/12

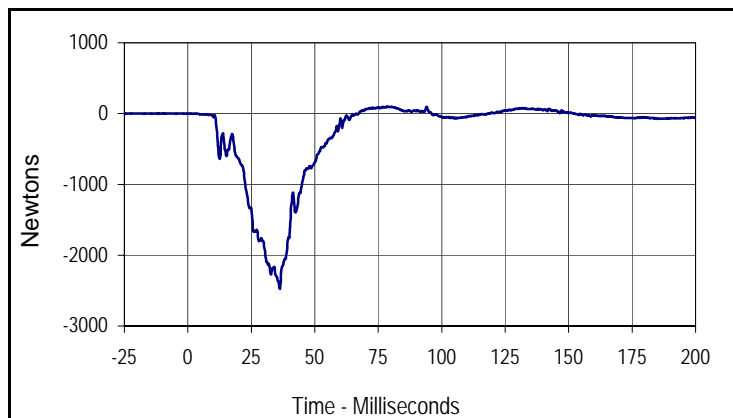


Curve Description			
Driver Pubic Symphysis Force Y			
Plot No.	Type	SAE Class	Units
013	FIL	600	Newtons
Max	Time	Min	Time
101.6	78.7	-2474.3	36.2

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan
 Test Program: 61 km/h (38 mph) Side Impact NCAP 27° Moving Deformable Barrier Test


NHTSA No.: MC5200
 Test Date: 1/24/12

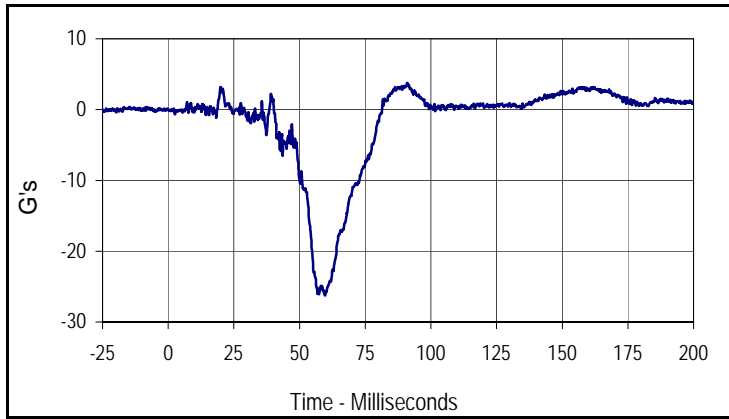


Curve Description			
Passenger Head Acceleration X Primary			
Plot No.	Type	SAE Class	Units
014	FIL	1000	G's
Max	Time	Min	Time
3.8	91.0	-26.2	59.7

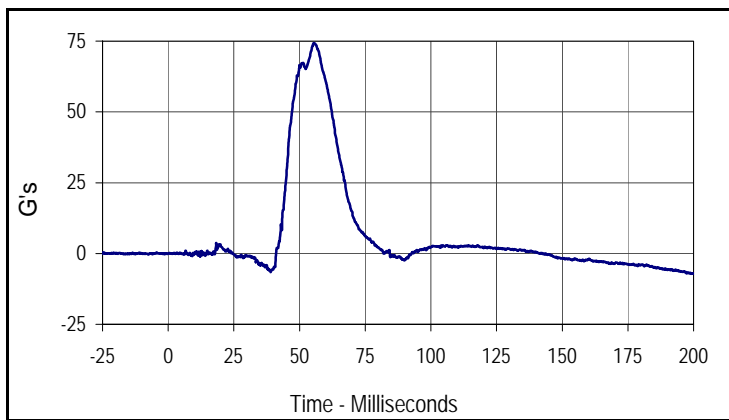

Curve Description			
Passenger Head Acceleration Y Primary			
Plot No.	Type	SAE Class	Units
015	FIL	1000	G's
Max	Time	Min	Time
74.3	55.4	-7.2	199.1

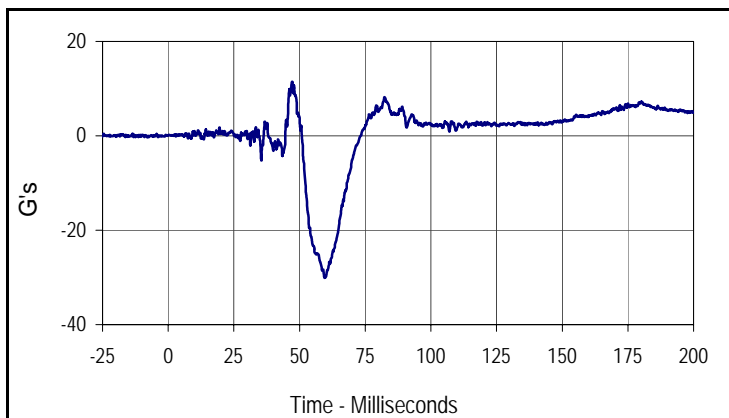


Curve Description			
Passenger Head Acceleration Z Primary			
Plot No.	Type	SAE Class	Units
016	FIL	1000	G's
Max	Time	Min	Time
11.4	47.2	-30.1	59.5

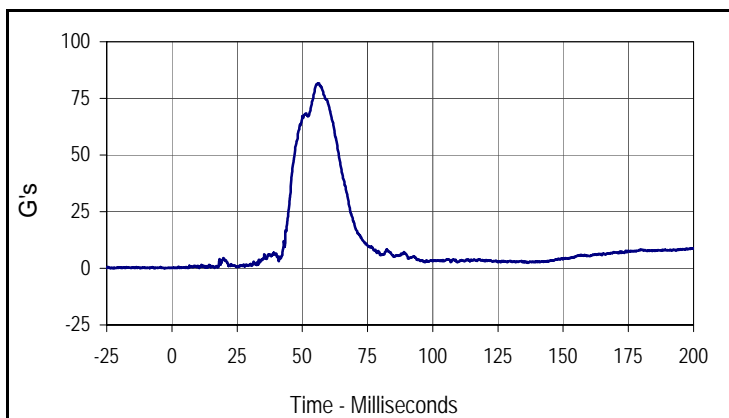


Curve Description			
Passenger Head Acceleration Resultant Primary			
Plot No.	Type	SAE Class	Units
017	RES	1000	G's
Max	Time	Min	Time
81.7	56.4	0.1	3.0

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan
 Test Program: 61 km/h (38 mph) Side Impact NCAP 27° Moving Deformable Barrier Test


NHTSA No.: MC5200
 Test Date: 1/24/12

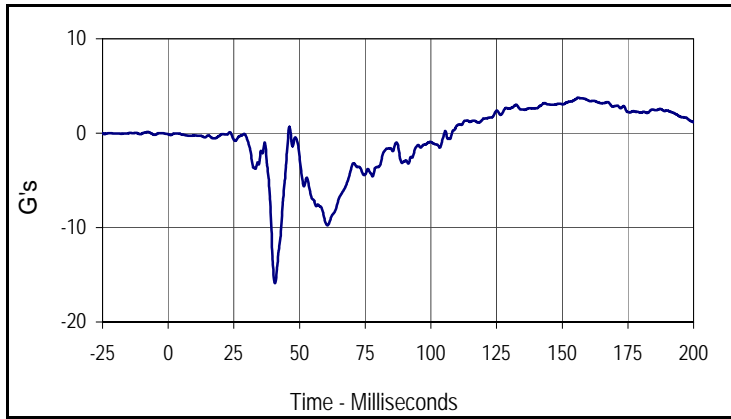


Curve Description			
Passenger Lower Spine T12 Acceleration X			
Plot No.	Type	SAE Class	Units
019	FIL	180	G's
Max	Time	Min	Time
3.8	156.1	-15.9	40.6

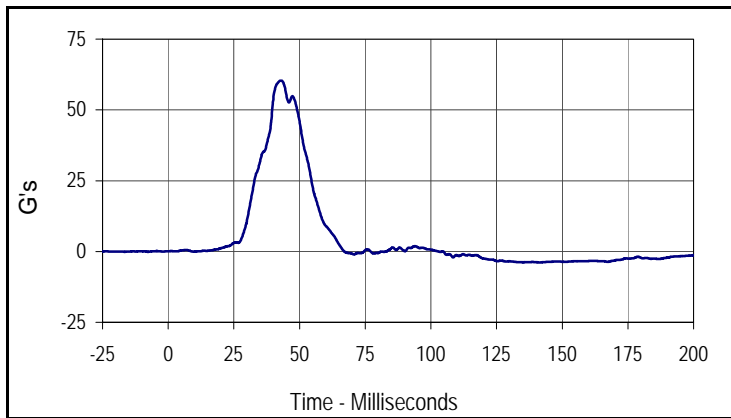

Curve Description			
Passenger Lower Spine T12 Acceleration Y			
Plot No.	Type	SAE Class	Units
020	FIL	180	G's
Max	Time	Min	Time
60.3	42.9	-3.9	141.3

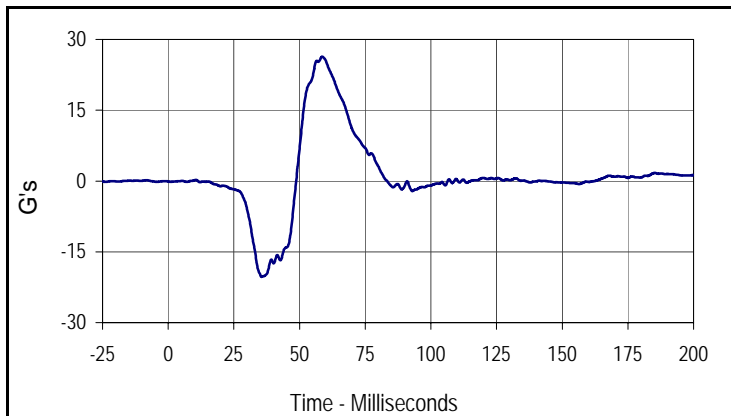


Curve Description			
Passenger Lower Spine T12 Acceleration Z			
Plot No.	Type	SAE Class	Units
021	FIL	180	G's
Max	Time	Min	Time
26.3	58.6	-20.3	35.5

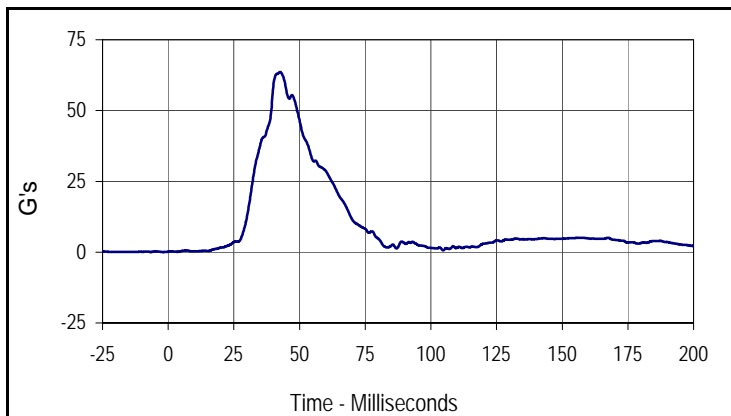


Curve Description			
Passenger Lower Spine T12 Acceleration Res.			
Plot No.	Type	SAE Class	Units
022	RES	180	G's
Max	Time	Min	Time
63.6	42.5	0.1	3.5

Test Vehicle: 2012 Nissan Versa 1.6 SV 4-Door Sedan
 Test Program: 61 km/h (38 mph) Side Impact NCAP 27° Moving Deformable Barrier Test


NHTSA No.: MC5200
 Test Date: 1/24/12

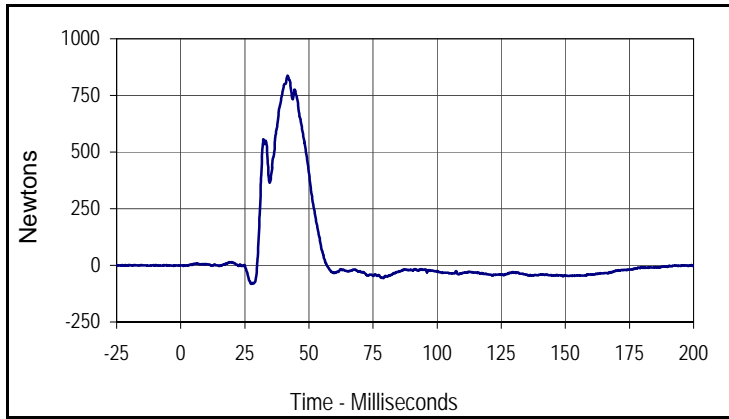

Curve Description			
Passenger Iliac Force on Impact Side Y			
Plot No.	Type	SAE Class	Units
023	FIL	600	Newtons
Max	Time	Min	Time
837.5	41.7	-82.0	27.5

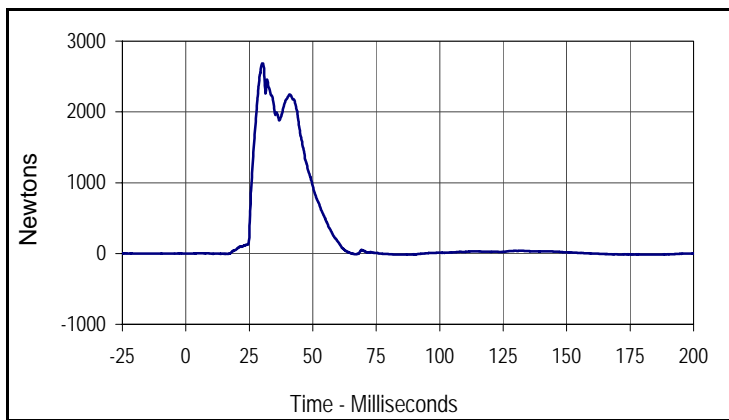

Curve Description			
Passenger Acetabulum Force on Impact Side Y			
Plot No.	Type	SAE Class	Units
024	FIL	600	Newtons
Max	Time	Min	Time
2684.9	30.3	-16.5	82.7

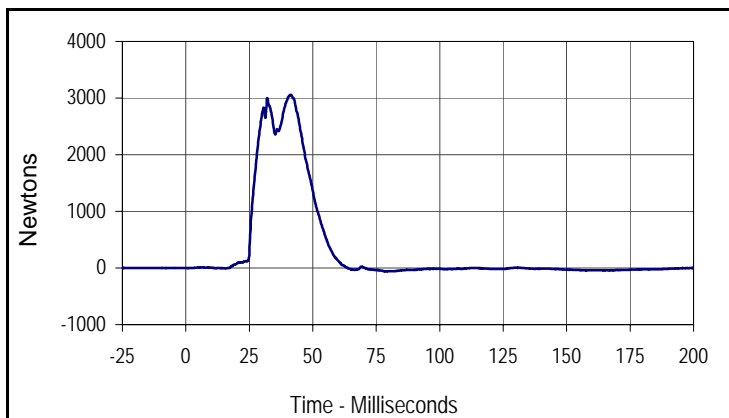

Curve Description			
Passenger Total Pelvic Force			
Plot No.	Type	SAE Class	Units
018	SUM	600	Newtons
Max	Time	Min	Time
3057.4	41.3	-62.3	79.0

APPENDIX C
DUMMY CONFIGURATION AND PERFORMANCE VERIFICATION DATA

APPENDIX C
PRE-TEST / ATD CONFIGURATION AND PERFORMANCE VERIFICATION DATA

Test Program: ES2re External Measurements

Test Date: 1/20/12

ATD Serial No.: F035

Test I.D.: N/A




Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	32	Pass
1 Sitting Height	mm	900 - 918	910	Pass
2 Seat to Shoulder Joint	mm	558 - 572	565	Pass
3 Seat to Lower Face of Thoracic Spine Box	mm	346 - 356	350	Pass
4 Seat to Hip Joint (Center of Bolt)	mm	97 - 103	100	Pass
5 Sole to Seat, Sitting	mm	333 - 451	385	Pass
6 Head Width	mm	152 - 158	156	Pass
7 Shoulder / Arm Width	mm	461 - 479	470	Pass
8 Thorax Width	mm	322 - 332	329	Pass
9 Abdomen Width	mm	273 - 287	280	Pass
10 Pelvis Lap Width	mm	359 - 373	360	Pass
11 Head Depth	mm	196 - 206	201	Pass
12 Thorax Depth	mm	262 - 272	270	Pass
13 Abdomen Width	mm	194 - 204	200	Pass
14 Pelvis Depth	mm	235 - 245	240	Pass
15 Back of Buttocks to Hip Joint (Center of Bolt)	mm	150 - 160	155	Pass
16 Back of Buttocks to Front Knee	mm	597 - 615	610	Pass
Overall Test Results				Pass

Test Program: ES2re Head Drop Test
 ATD Serial No.: F035


Test Date: 1/20/12
 Test I.D.: F035HD023




Tested Parameter	Units	Specification	Result	Pass/Fail
Head Assembly Soak Time	Minutes	≥240	260	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	38.0	Pass
	Min		30.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	34.7	Pass
Peak Head Resultant Acceleration	G's	125 to 155	139.1	Pass
Peak Head X Acceleration	G's	≤15	5.6	Pass
Is Acceleration Unimodal?	Yes/No	Yes	Yes	Pass
Oscillations After Main Pulse	%	<15	9.8	Pass
Overall Test Results				Pass

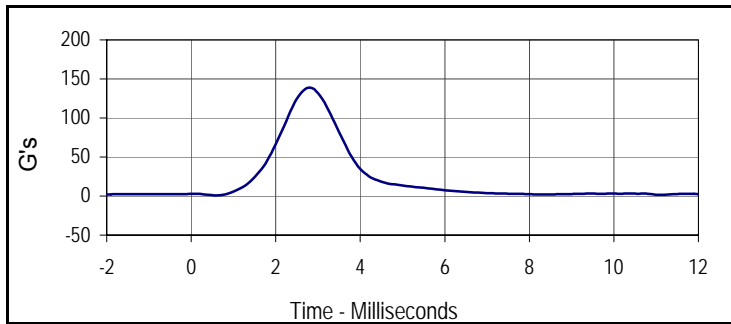


Curve Description			
Head Resultant			
Plot No.	Type	SAE Class	Units
001	RES	1000	G's
Max	Time	Min	Time
139.1	2.8	0.9	0.6

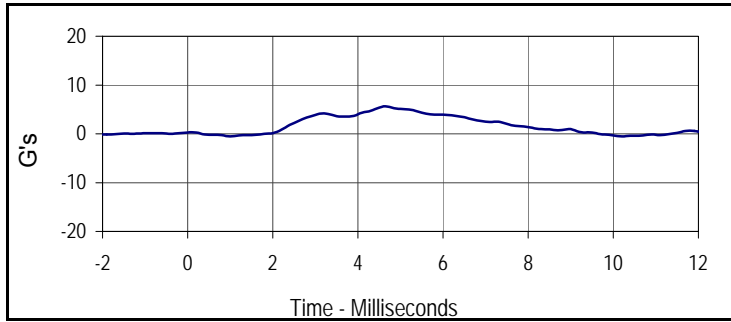

Curve Description			
Head X			
Plot No.	Type	SAE Class	Units
002	FIL	1000	G's
Max	Time	Min	Time
5.6	4.6	-0.5	1.0

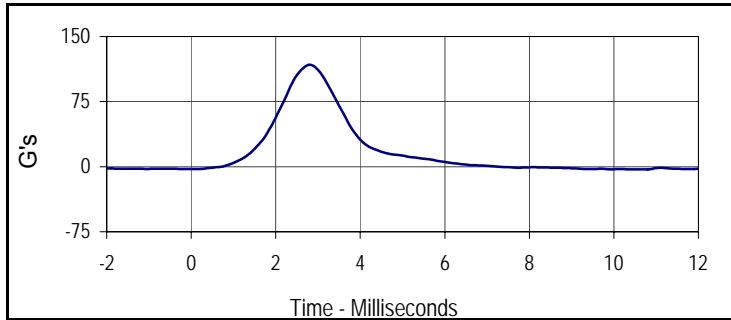

Curve Description			
Head Y			
Plot No.	Type	SAE Class	Units
003	FIL	1000	G's
Max	Time	Min	Time
117.5	2.8	-2.9	10.0

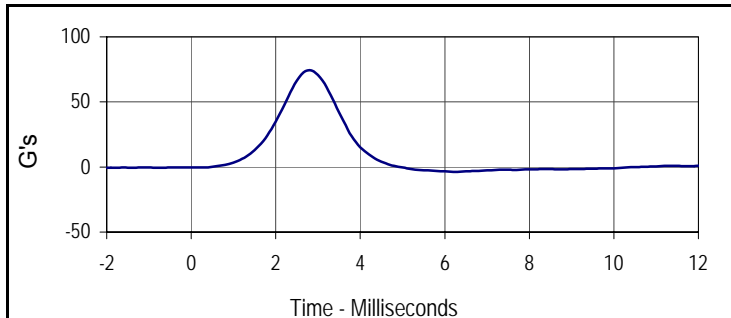


Curve Description			
Head Z			
Plot No.	Type	SAE Class	Units
004	FIL	1000	G's
Max	Time	Min	Time
74.4	2.8	-3.7	6.3

Test Program: ES2re Neck Flexion Test
 ATD Serial No.: F035


Test Date: 1/20/12
 Test I.D.: F035NB023




Tested Parameter	Units	Specification	Result	Pass/Fail
Neck Assembly Soak Time	Minutes	≥240	270	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	38.0	Pass
	Min		30.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	37.1	Pass
Pendulum Velocity	m/s	3.3 to 3.5	3.4	Pass
Headform Flexion	Max	49 to 59	53.4	Pass
	Time	54 to 66	58.3	Pass
Headform Flexion Decay (Peak to Zero)	msec	53 to 88	63.0	Pass
Overall Test Results				Pass

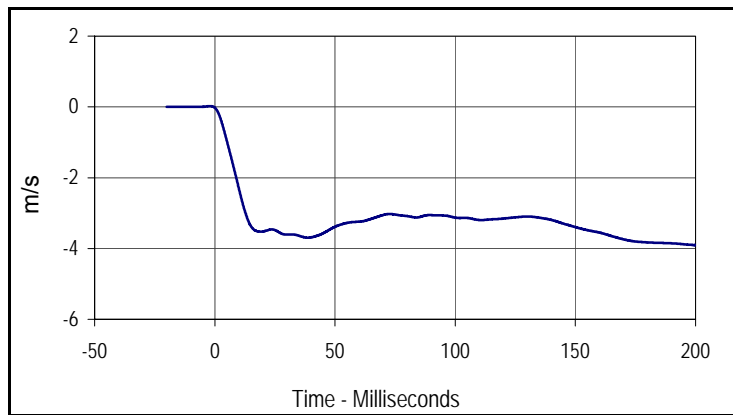

Curve Description			
Pendulum Velocity			
Plot No.	Type	SAE Class	Units
001	FIL	60	m/s
Max	Time	Min	Time
0.0	-1.9	-3.9	200.0

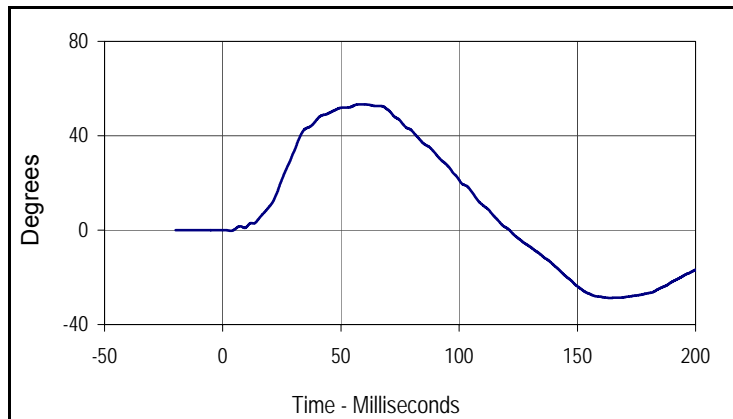

Curve Description			
Headform Rotation			
Plot No.	Type	SAE Class	Units
002	FIL	180	Degrees
Max	Time	Min	Time
53.4	58.3	-28.7	163.9

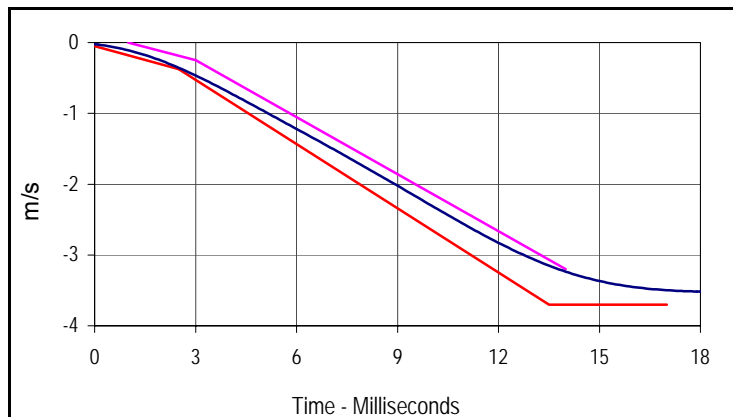


Curve Description			
Pendulum Velocity			
Plot No.	Type	SAE Class	Units
001	FIL	60	m/s
Max	Time	Min	Time
0.0	-1.9	-3.9	200.0

Velocity Corridors


Upper Boundary		Lower Boundary	
Time (msec)	Velocity (m/s)	Time (msec)	Velocity (m/s)
1.0	0.00	0.0	-0.05
3.0	-0.03	2.5	-0.375
14.0	-3.20	13.5	-3.70
		17.0	-3.70

Test Program: ES2re Neck Flexion Test
 ATD Serial No.: F035


Test Date: 1/20/12
 Test I.D.: F035NB023

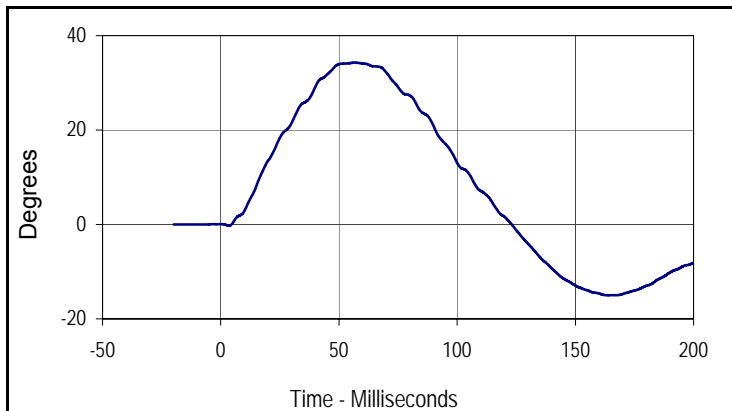

Curve Description			
Potentiometer A			
Plot No.	Type	SAE Class	Units
003	FIL	180	Degrees
Max	Time	Min	Time
34.3	56.6	-15.0	163.9

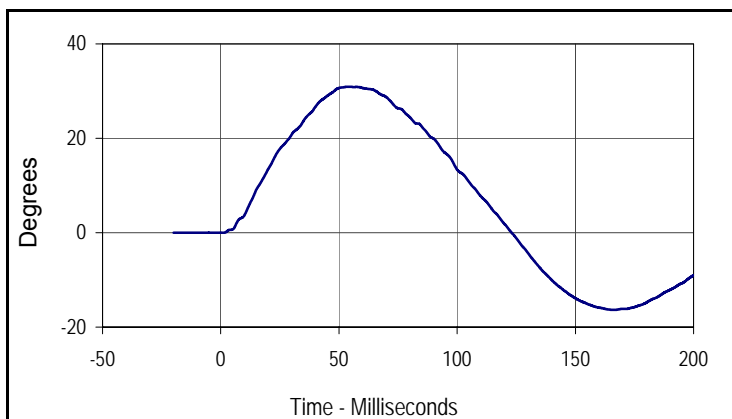

Curve Description			
Potentiometer B			
Plot No.	Type	SAE Class	Units
004	FIL	180	Degrees
Max	Time	Min	Time
30.9	54.3	-16.3	166.2

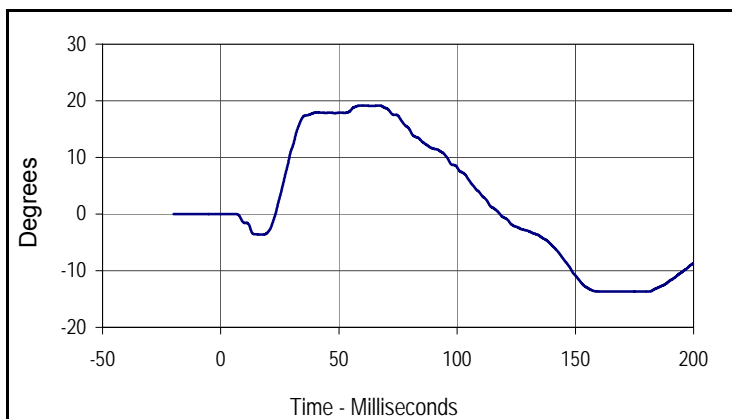


Curve Description			
Potentiometer C			
Plot No.	Type	SAE Class	Units
005	FIL	180	Degrees
Max	Time	Min	Time
19.2	67.1	-13.7	162.5

Test Program: ES2re Shoulder Impact Test
 ATD Serial No.: F035

Test Date: 1/20/12
 Test I.D.: F035SH023



Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥240	320	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	38.0	Pass
	Min		30.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.5	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	36.5	Pass
Pendulum Speed	m/s	4.2 to 4.4	4.3	Pass
Peak Impactor Acceleration	G's	7.5 to 10.5	9.4	Pass
Overall Test Results				Pass

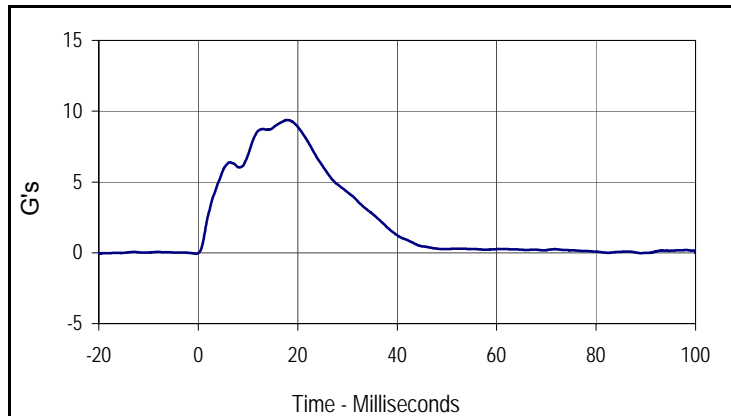


Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
001	FIL	180	G's
Max	Time	Min	Time
9.4	17.9	-0.1	-0.4

Test Program: ES2re Thorax - Rib Drop Test
 ATD Serial No.: F035 Rib #1


Test Date: 1/20/12
 Test I.D.: F035RB1023



Tested Parameter	Units	Specification	Result	Pass/Fail
Rib Module Soak Time	Minutes	≥240	350	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	38.0	Pass
	Min		30.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.4	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	37.2	Pass
Peak Rib Deflection at 459 +/- 5 mm Drop Height	mm	36 to 40	38.2	Pass
Peak Rib Deflection at 815 +/- 8 mm Drop Height	mm	46 to 51	48.6	Pass
Overall Test Results				Pass

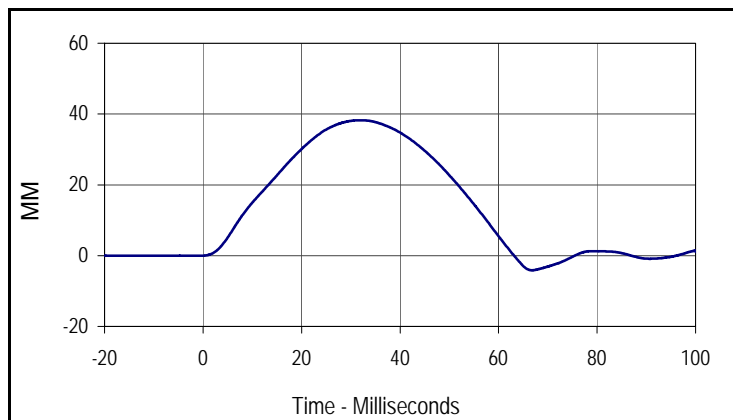

Curve Description			
Upper Rib Deflection (459 mm Drop Height)			
Plot No.	Type	SAE Class	Units
001	FIL	180	MM
Max	Time	Min	Time
38.2	32.0	-4.1	66.8

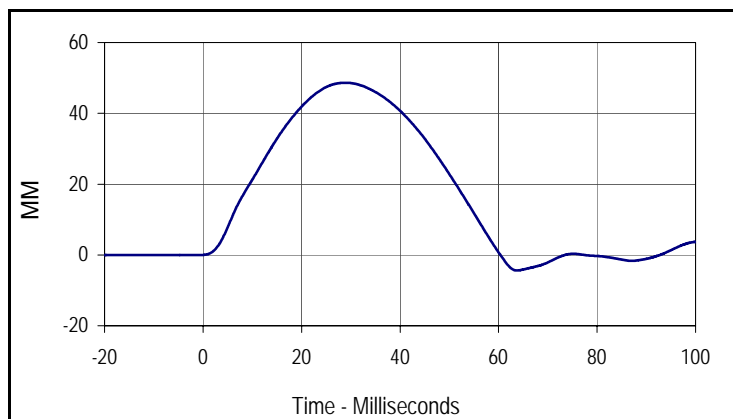


Curve Description			
Upper Rib Deflection (815 mm Drop Height)			
Plot No.	Type	SAE Class	Units
002	FIL	180	MM
Max	Time	Min	Time
48.6	28.9	-4.4	63.7

Test Program: ES2re Thorax - Rib Drop Test
 ATD Serial No.: F035 Rib #2


Test Date: 1/20/12
 Test I.D.: F035RB2023



Tested Parameter	Units	Specification	Result	Pass/Fail
Rib Module Soak Time	Minutes	≥240	380	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	38.0	Pass
	Min		30.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.6	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	36.9	Pass
Peak Rib Deflection at 459 +/- 5 mm Drop Height	mm	36 to 40	38.4	Pass
Peak Rib Deflection at 815 +/- 8 mm Drop Height	mm	46 to 51	48.8	Pass
Overall Test Results				Pass

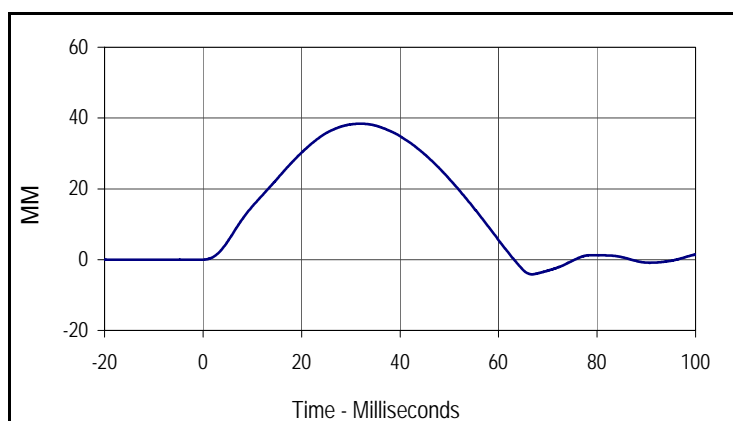

Curve Description			
Middle Rib Deflection (459 mm Drop Height)			
Plot No.	Type	SAE Class	Units
001	FIL	180	MM
Max	Time	Min	Time
38.4	32.0	-4.2	66.8

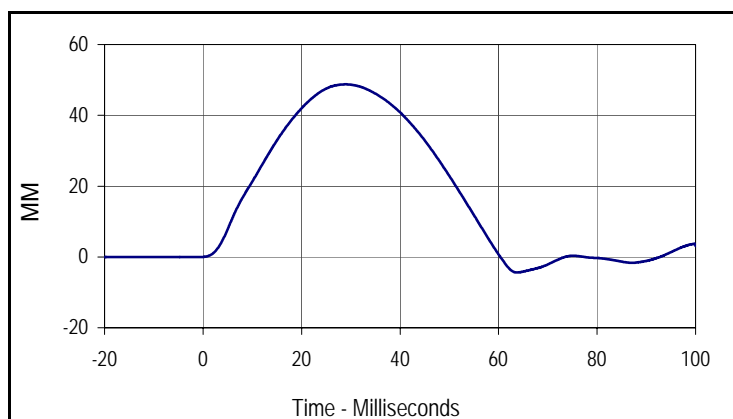


Curve Description			
Middle Rib Deflection (815 mm Drop Height)			
Plot No.	Type	SAE Class	Units
002	FIL	180	MM
Max	Time	Min	Time
48.8	28.9	-4.4	63.8

Test Program: ES2re Thorax - Rib Drop Test
 ATD Serial No.: F035 Rib # 3


Test Date: 1/20/12
 Test I.D.: F035RB3023



Tested Parameter	Units	Specification	Result	Pass/Fail
Rib Module Soak Time	Minutes	≥240	400	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	38.0	Pass
	Min		30.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.4	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	35.2	Pass
Peak Rib Deflection at 459 +/- 5 mm Drop Height	mm	36 to 40	38.7	Pass
Peak Rib Deflection at 815 +/- 8 mm Drop Height	mm	46 to 51	49.8	Pass
Overall Test Results				Pass

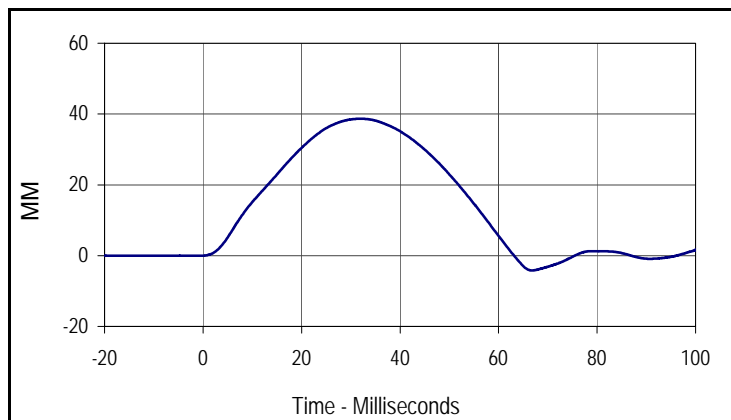

Curve Description			
Lower Rib Deflection (459 mm Drop Height)			
Plot No.	Type	SAE Class	Units
001	FIL	180	MM
Max	Time	Min	Time
38.7	32.0	-4.2	66.8

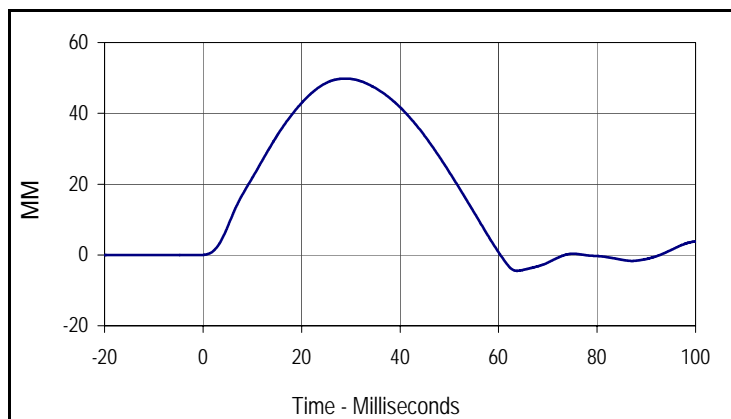


Curve Description			
Lower Rib Deflection (815 mm Drop Height)			
Plot No.	Type	SAE Class	Units
001	FIL	180	MM
Max	Time	Min	Time
49.8	28.9	-4.5	63.7

Test Program: ES2re Thorax - Full Body Impact Test
 ATD Serial No.: F035


Test Date: 1/20/12
 Test I.D.: F035TH023




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥240	420	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	38.0	Pass
	Min		30.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.3	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	31.2	Pass
Peak Impactor Velocity	m/s	5.4 to 5.6	5.5	Pass
Peak Impactor Force	N	5100 to 6200	5543.2	Pass
	msec	> 6.0 msec	9.2	Pass
Peak Upper Rib Deflection	mm	34 to 41	38.9	Pass
Peak Middle Rib Deflection	mm	37 to 45	42.5	Pass
Peak Lower Rib Deflection	mm	37 to 44	43.0	Pass
Overall Test Results				Pass

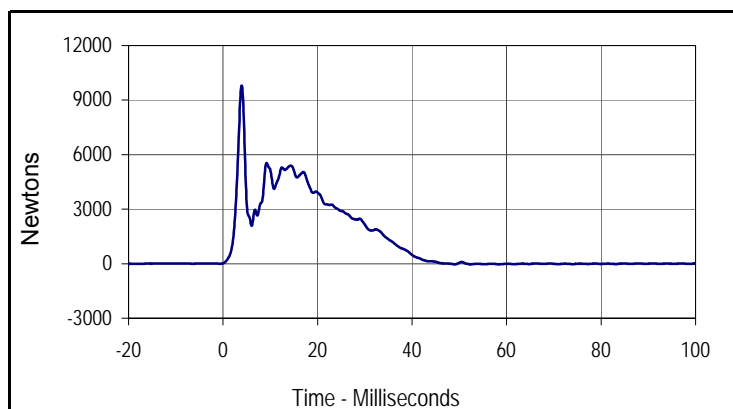

Curve Description			
Impactor Force			
Plot No.	Type	SAE Class	Units
001	FIL	180	Newtons
Max	Time	Min	Time
9800.1	4.0	-35.0	58.3

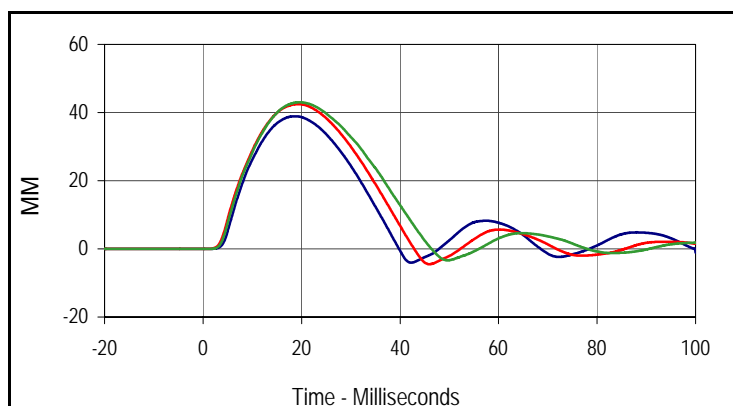

Curve Description			
Upper, Middle, Lower Rib Deflections			
Plot No.	Type	SAE Class	Units
002	FIL	180	MM
Max (Upper)	Time	Min (Upper)	Time
38.9	18.7	-4.1	42.2
Max (Middle)	Time	Min (Middle)	Time
42.5	19.4	-4.5	46.0
Max (Lower)	Time	Min (Lower)	Time
43.0	19.5	-3.4	49.7

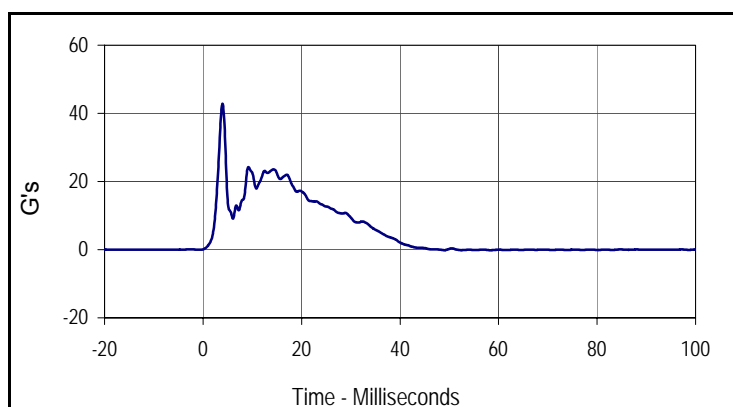


Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
42.8	4.0	-0.2	58.3

Test Program: ES2re Abdomen Impact Test
 ATD Serial No.: F035


Test Date: 1/20/12
 Test I.D.: F035ABD023



Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥240	440	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	38.0	Pass
	Min		30.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	35.1	Pass
Probe Velocity	m/s	3.9 to 4.1	4.0	Pass
Peak Impactor Force	N	4000 to 4800	4578.1	Pass
	msec	10.6 to 13.0	11.9	Pass
Sum of Abdominal Forces	N	2200 to 2700	2595.7	Pass
	msec	10.0 to 12.3	11.7	Pass
Overall Test Results				Pass

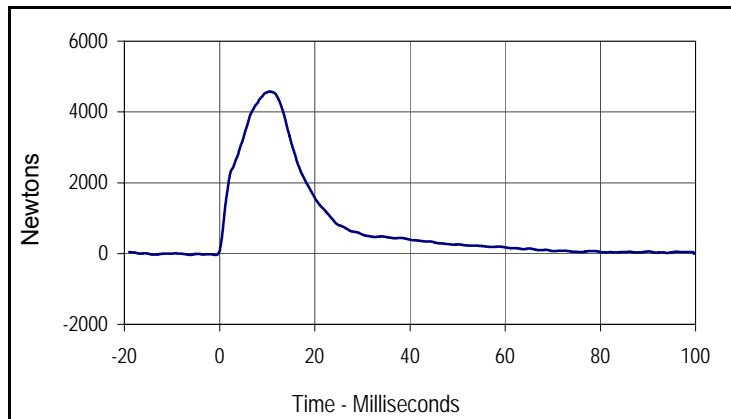


Curve Description			
Impactor Force			
Plot No.	Type	SAE Class	Units
001	FIL	180	Newtons
Max	Time	Min	Time
4578.1	11.9	-39.2	0.6

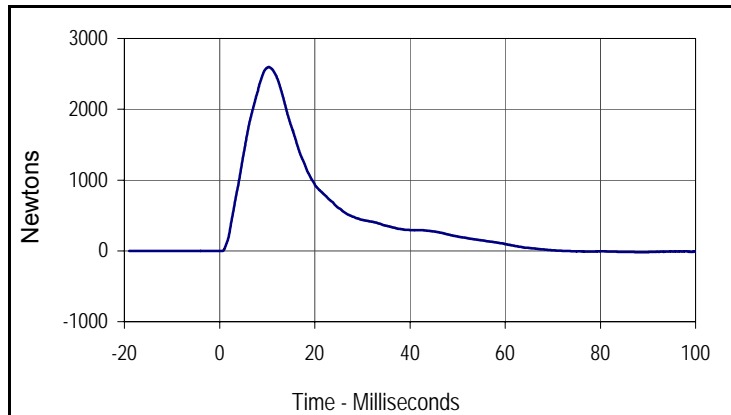


Curve Description			
Abdomen Sum Resultant			
Plot No.	Type	SAE Class	Units
002	RES	600	Newtons
Max	Time	Min	Time
2595.7	11.7	-18.2	89.5

Test Program: ES2re Abdomen Impact Test
 ATD Serial No.: F035


Test Date: 1/20/12
 Test I.D.: F035ABD023

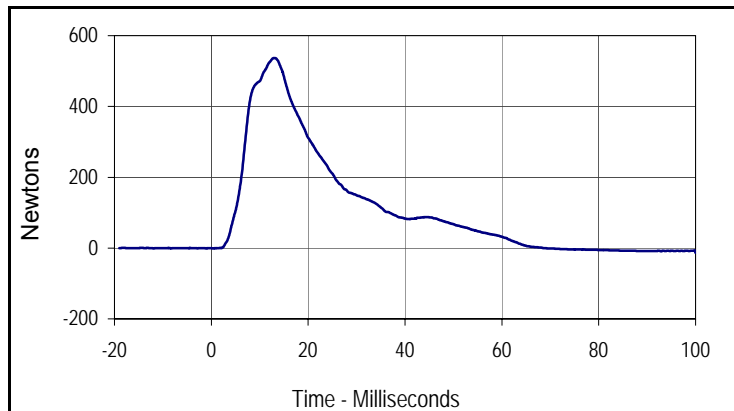

Curve Description			
Front Abdomen Force			
Plot No.	Type	SAE Class	Units
003	FIL	600	Newtons
Max	Time	Min	Time
536.9	12.9	-13.0	100.0

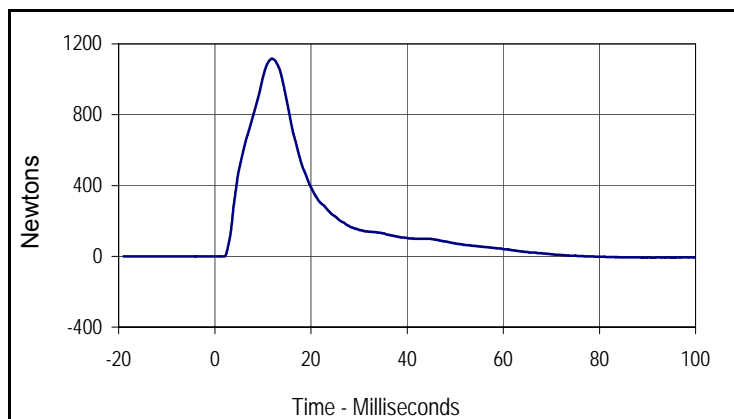

Curve Description			
Middle Abdomen Force			
Plot No.	Type	SAE Class	Units
004	FIL	600	Newtons
Max	Time	Min	Time
1116.4	11.9	-8.5	102.2

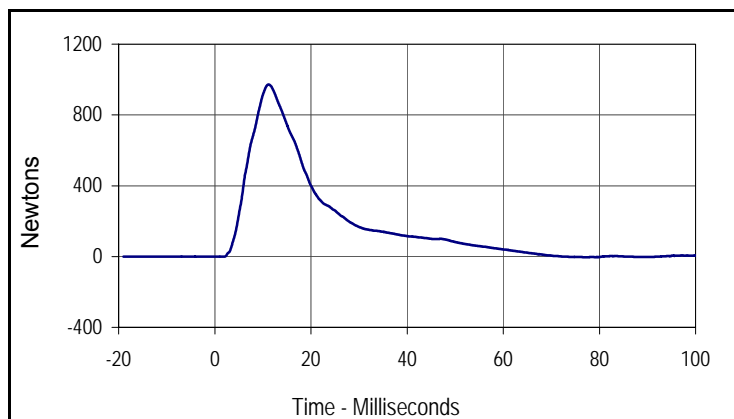


Curve Description			
Rear Abdomen Force			
Plot No.	Type	SAE Class	Units
005	FIL	600	Newtons
Max	Time	Min	Time
971.5	11.2	-8.5	102.2

Test Program: ES2re Lumbar Flexion Test
 ATD Serial No.: F035


Test Date: 1/20/12
 Test I.D.: F035LB023




Tested Parameter	Units	Specification	Result	Pass/Fail
Lumbar Spine Assembly Soak Time	Minutes	≥240	350	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	38.0	Pass
	Min		30.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.6	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	36.7	Pass
Pendulum Velocity	m/s	5.95 to 6.15	6.04	Pass
Headform Rotation	Max	45 to 55	48.9	Pass
	Time	39 to 53	40.4	Pass
Time of Decay to Zero Angle from Peak	msec	37 to 57	38.4	Pass
Overall Test Results				Pass

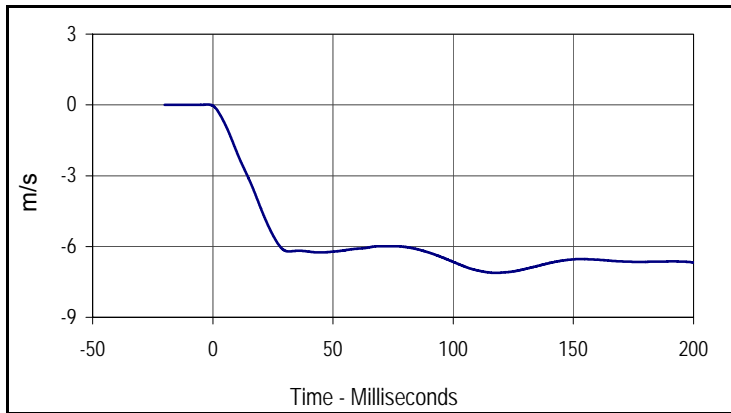

Curve Description			
Pendulum Velocity			
Plot No.	Type	SAE Class	Units
001	FIL	60	m/s
Max	Time	Min	Time
0.0	-2.2	-7.1	117.5

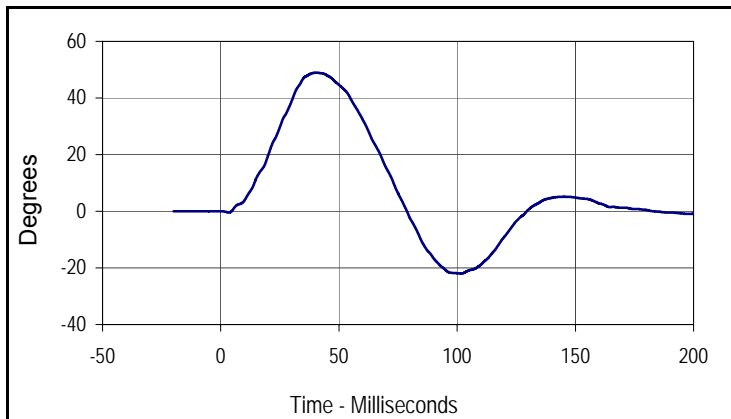

Curve Description			
Headform Rotation			
Plot No.	Type	SAE Class	Units
002	FIL	180	Degrees
Max	Time	Min	Time
48.9	40.4	-22.0	101.6

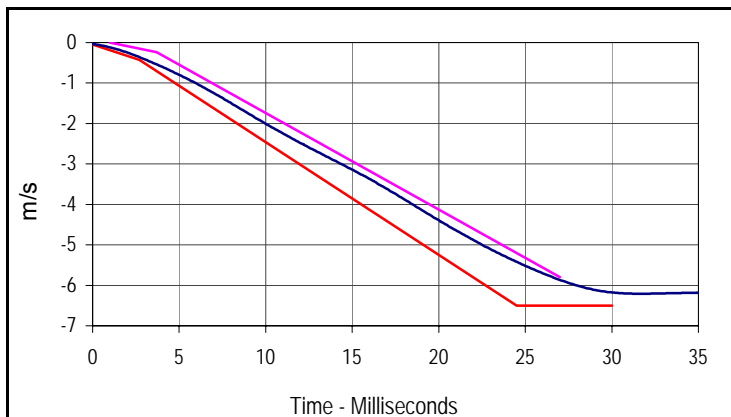


Curve Description			
Pendulum Velocity			
Plot No.	Type	SAE Class	Units
001	FIL	60	m/s
Max	Time	Min	Time
0.0	-2.2	-7.1	117.5

Velocity Corridors


Upper Boundary		Lower Boundary	
Time (msec)	Velocity (m/s)	Time (msec)	Velocity (m/s)
1.0	0.00	0.0	-0.05
3.7	-0.24	2.7	-0.425
27.0	-5.80	24.5	-6.50
		30.0	-6.50

Test Program: ES2re Lumbar Flexion Test
 ATD Serial No.: F035


Test Date: 1/20/12
 Test I.D.: F035LB023

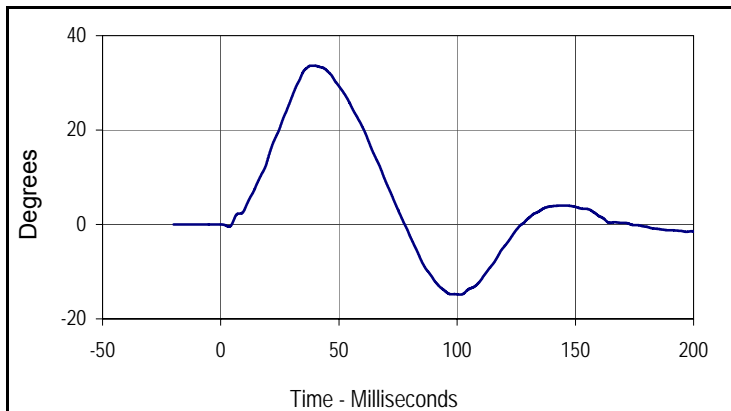

Curve Description			
Potentiometer A			
Plot No.	Type	SAE Class	Units
003	FIL	180	Degrees
Max	Time	Min	Time
33.6	38.3	-14.9	101.3

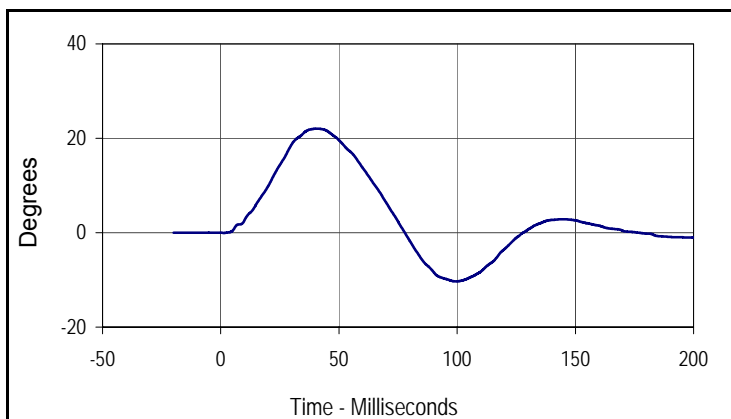

Curve Description			
Potentiometer B			
Plot No.	Type	SAE Class	Units
004	FIL	180	Degrees
Max	Time	Min	Time
22.0	40.4	-10.3	99.6

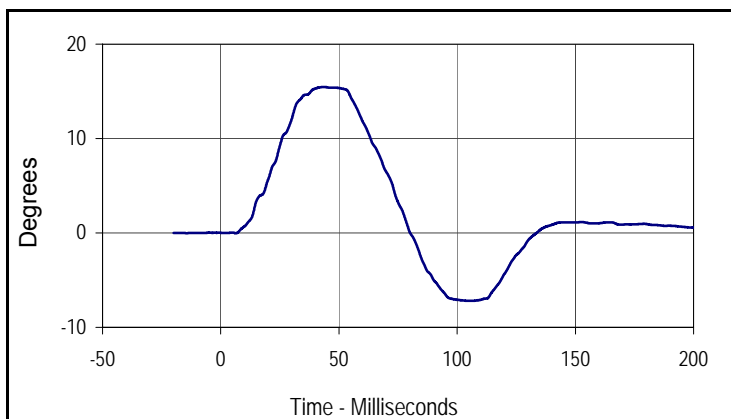


Curve Description			
Potentiometer C			
Plot No.	Type	SAE Class	Units
005	FIL	180	Degrees
Max	Time	Min	Time
15.5	43.8	-7.2	106.6

Test Program: ES2re Pelvis Impact Test
 ATD Serial No.: F035


Test Date: 1/20/12
 Test I.D.: F035PL023




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥240	500	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	38.0	Pass
	Min		30.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	30.2	Pass
Pendulum Velocity	m/s	4.2 to 4.4	4.3	Pass
Peak Impactor Force	N	4700 to 5400	5279.6	Pass
	msec	11.8 to 16.1	11.8	Pass
Peak Pubic Symphysis Load	N	-1230 to -1590	-1377.3	Pass
	msec	12.2 to 17.0	12.3	Pass
Overall Test Results				Pass

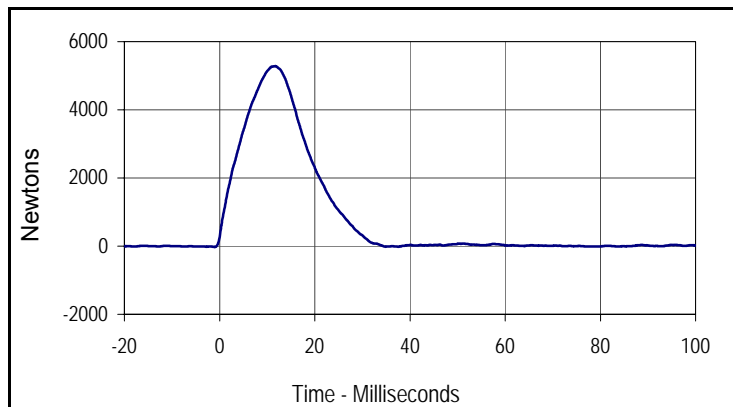

Curve Description			
Impactor Force			
Plot No.	Type	SAE Class	Units
001	FIL	180	Newtons
Max	Time	Min	Time
5281.8	11.7	-24.4	-1.0

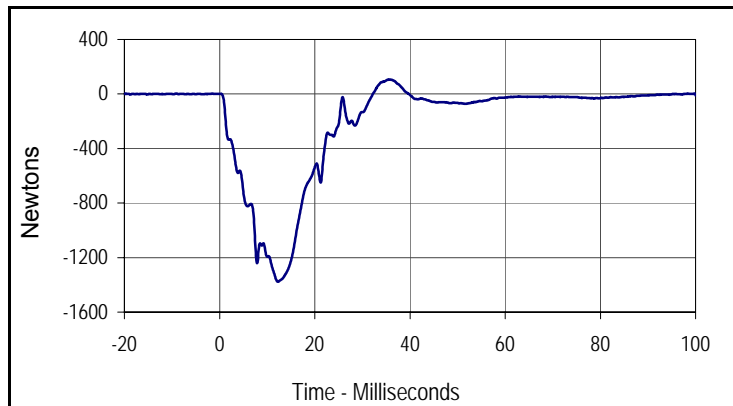

Curve Description			
Pubic Symphysis Force Y			
Plot No.	Type	SAE Class	Units
002	FIL	600	Newtons
Max	Time	Min	Time
105.8	35.7	-1377.3	12.3

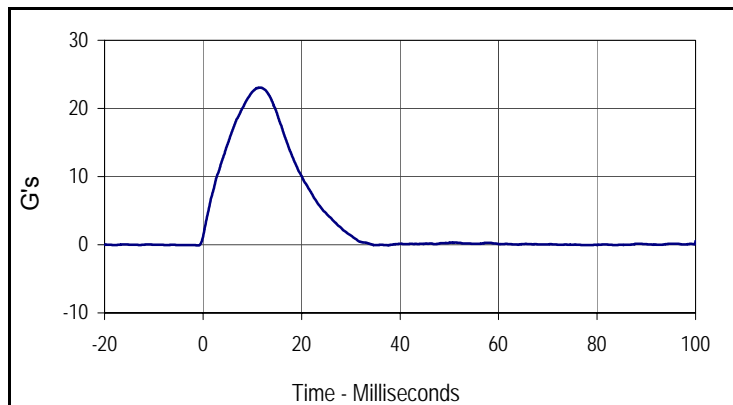

Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
23.1	11.7	-0.1	-1.0

Test Program: SID IIs External Measurements

Test Date: 1/9/12

ATD Serial No.: 307

Test I.D.: N/A




Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.5	Pass
Laboratory Relative Humidity	%	10 to 70	34	Pass
A Sitting Height	mm	772 - 788	780	Pass
B Shoulder Pivot Height	mm	437 - 453	443	Pass
C H-Point Height	mm	79 - 89	83	Pass
D H-Point from Seatback	mm	141 - 151	145	Pass
E Shoulder Pivot from Backline	mm	97 - 107	103	Pass
F Thigh Clearance	mm	119 - 135	126	Pass
G Head Breadth	mm	140 - 148	145	Pass
H Head Back from Backline	mm	40 - 46	43	Pass
I Head Depth	mm	178 - 188	182	Pass
J Head Circumference	mm	541 - 551	547	Pass
K Buttock to Knee Length	mm	514 - 540	527	Pass
L Popliteal Height	mm	343 - 369	349	Pass
M Knee Pivot to Floor Height	mm	392 - 409	400	Pass
N Buttock Popliteal Length	mm	416 - 442	430	Pass
O Chest Depth w/o Jacket	mm	195 - 211	205	Pass
P Foot Length	mm	216 - 232	221	Pass
Q Hip Breadth with Pelvic Plug	mm	313 - 323	317	Pass
R Arm Length	mm	249 - 259	252	Pass
S Knee Joint to Seatback	mm	477 - 493	480	Pass
V Shoulder Width	mm	341 - 357	351	Pass
W Foot Width	mm	78 - 94	89	Pass
Y Chest Circumference with Jacket	mm	851 - 881	875	Pass
Z Waist Circumference	mm	760 - 791	774	Pass
Overall Test Results				Pass

Test Program: SID IIs Head Drop Test
 ATD Serial No.: 307


Test Date: 1/9/12
 Test I.D.: 307HD026




Tested Parameter	Units	Specification	Result	Pass/Fail
Head Assembly Soak Time	Minutes	≥240	270	Pass
Temperature During Soak	Max	18.9 to 25.6	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	34.0	Pass
	Min		29.0	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	33.2	Pass
Peak Head Resultant Acceleration	G's	115 to 137	123.5	Pass
Peak Head X Acceleration	G's	<15	2.4	Pass
Is Acceleration Unimodal?	Yes/No	Yes	Yes	Pass
Oscillations After Main Pulse	%	<15	10.4	Pass
Overall Test Results				Pass

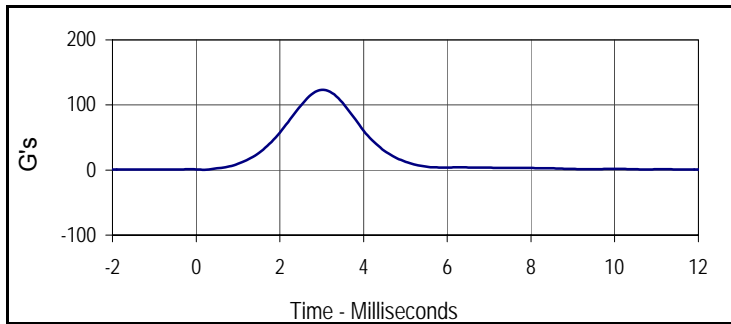


Curve Description			
Head Resultant			
Plot No.	Type	SAE Class	Units
001	RES	1000	G's
Max	Time	Min	Time
123.5	3.0	0.2	0.2

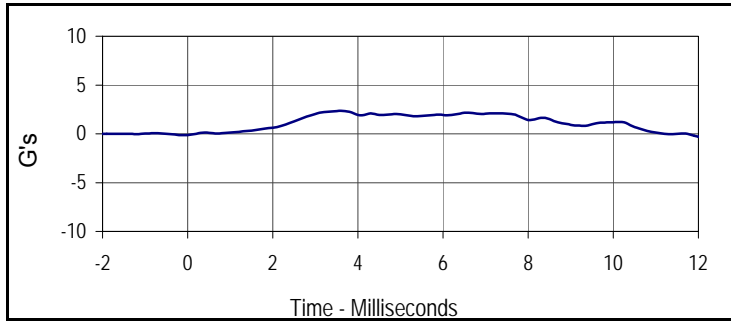

Curve Description			
Head X			
Plot No.	Type	SAE Class	Units
002	FIL	1000	G's
Max	Time	Min	Time
2.4	3.6	-0.1	-0.1

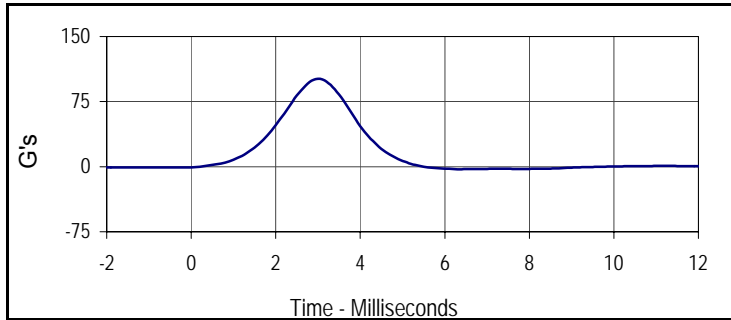

Curve Description			
Head Y			
Plot No.	Type	SAE Class	Units
003	FIL	1000	G's
Max	Time	Min	Time
101.2	3.0	-3.0	6.4

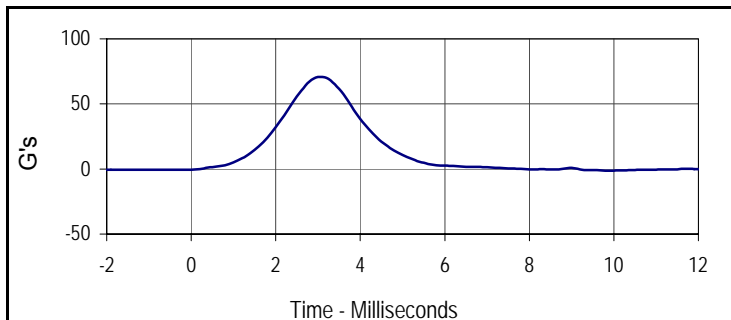


Curve Description			
Head Z			
Plot No.	Type	SAE Class	Units
004	FIL	1000	G's
Max	Time	Min	Time
70.8	3.1	-1.4	9.9

Test Program: SID IIs Neck Flexion Test
 ATD Serial No.: 307


Test Date: 1/9/12
 Test I.D.: 307NB026




Tested Parameter	Units	Specification	Result	Pass/Fail	
Neck Assembly Soak Time	Minutes	≥240	340	Pass	
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass	
	Min		20.7	Pass	
Humidity During Soak	Max	10.0 to 70.0	34.0	Pass	
	Min		28.0	Pass	
Laboratory Temperature During Test	°C	20.6 to 22.2	21.6	Pass	
Laboratory Humidity During Test	%	10.0 to 70.0	33.8	Pass	
Pendulum Velocity	m/s	5.51 to 5.63	5.57	Pass	
Pendulum Deceleration	10 msec	m/s	-2.20 to -2.80	-2.40	Pass
	15 msec	m/s	-3.30 to -4.10	-3.69	Pass
	20 msec	m/s	-4.40 to -5.40	-4.85	Pass
	25 msec	m/s	-5.40 to -6.10	-5.61	Pass
	25-100 msec	m/s	-5.50 to -6.20	-6.16	Pass
D-Plane Rotation	Max	Degrees	71 to 81	79.5	Pass
	Time	msec	50 to 70	66.7	Pass
Peak Occipital Condyle Moment	Nm	-36 to -44	-39.5	Pass	
Decaying Moment Time to Cross 0 Nm	msec	102 to 126	122.7	Pass	
Overall Test Results			Pass	Pass	

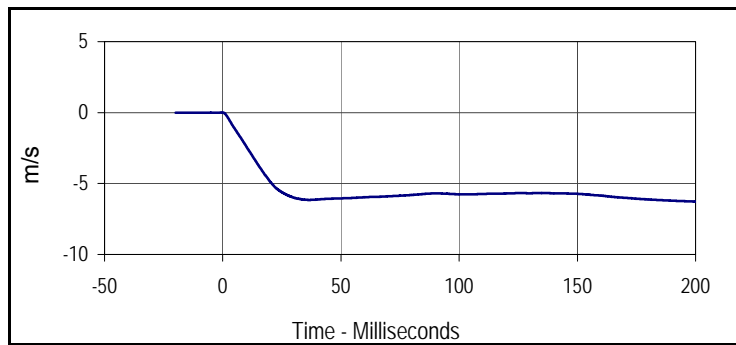

Curve Description			
Pendulum Velocity			
Plot No.	Type	SAE Class	Units
001	FIL	180	m/s
Max	Time	Min	Time
0.0	-0.5	-6.3	200.0

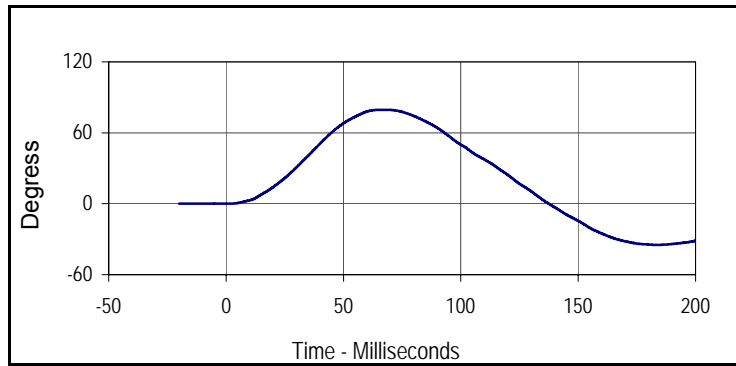

Curve Description			
Maximum Translation Rotation			
Plot No.	Type	SAE Class	Units
002	FIL	60	Degress
Max	Time	Min	Time
79.5	66.7	-34.8	183.4

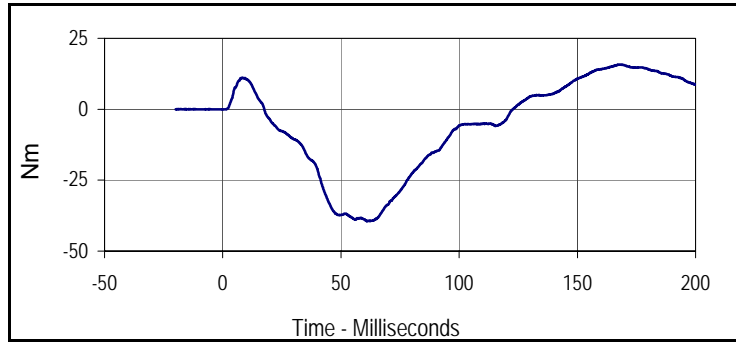


Curve Description			
Moment About Occipital Condyle			
Plot No.	Type	SAE Class	Units
003	FIL	600	Nm
Max	Time	Min	Time
15.8	168.0	-39.5	61.1

Test Program: SID IIs Shoulder Impact Test
 ATD Serial No.: 307


Test Date: 1/23/12
 Test I.D.: 307SH01A




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥180	200	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	35.0	Pass
	Min		29.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	32.5	Pass
Impactor Velocity	m/s	4.20 to 4.40	4.29	Pass
Peak Shoulder Deflection	mm	28 to 37	30.8	Pass
Peak Lateral Spine Acceleration Y	G's	17 to 22	18.1	Pass
Peak Impactor Acceleration	G's	13 to 18	15.9	Pass
Overall Test Results				Pass

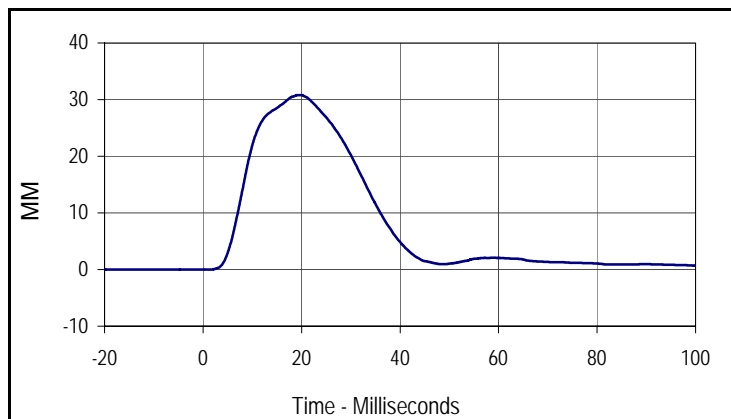

Curve Description			
Shoulder Deflection			
Plot No.	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
30.8	19.8	0.0	-9.6

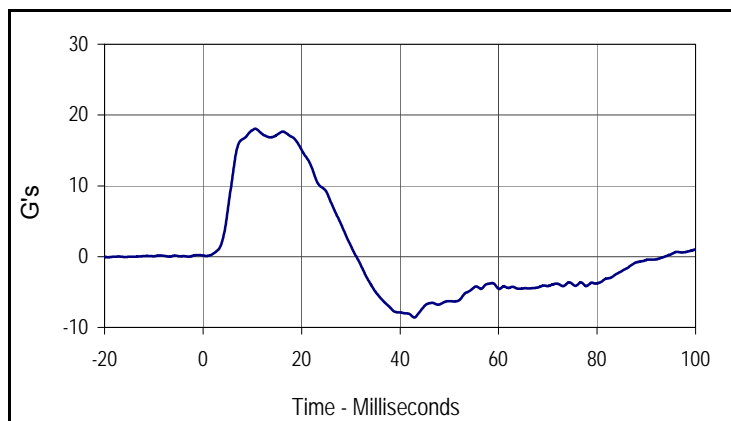

Curve Description			
Upper Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
002	FIL	180	G's
Max	Time	Min	Time
18.1	10.6	-8.6	42.9

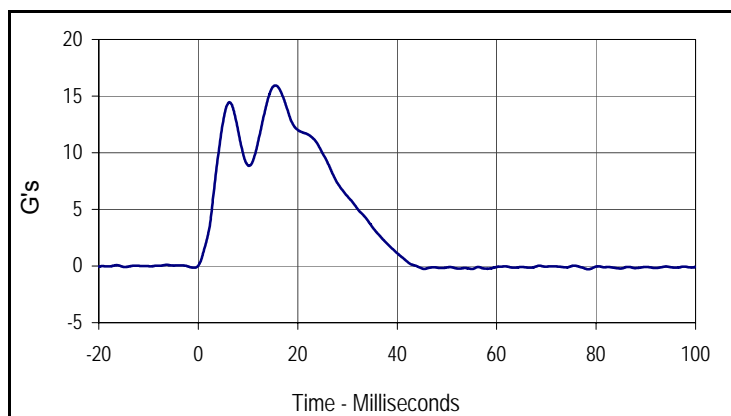


Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
15.9	15.5	-0.3	78.4

Test Program: SID IIs Thorax with Arm Impact Test
 ATD Serial No.: 307


Test Date: 1/23/12
 Test I.D.: 307TWA01A




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥180	230	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	35.0	Pass
	Min		29.0	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.6	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	31.5	Pass
Impactor Velocity	m/s	6.6 to 6.8	6.7	Pass
Peak Shoulder Deflection	mm	31 to 40	35.0	Pass
Peak Upper Thorax Rib Deflection	mm	25 to 32	28.4	Pass
Peak Middle Thorax Rib Deflection	mm	30 to 36	33.4	Pass
Peak Lower Thorax Rib Deflection	mm	32 to 38	35.7	Pass
Peak Upper Spine Y Acceleration	G's	34 to 43	36.6	Pass
Peak Lower Spine Y Acceleration	G's	29 to 37	30.6	Pass
Peak Impactor Acceleration	G's	30 to 36	33.2	Pass
Overall Test Results				Pass

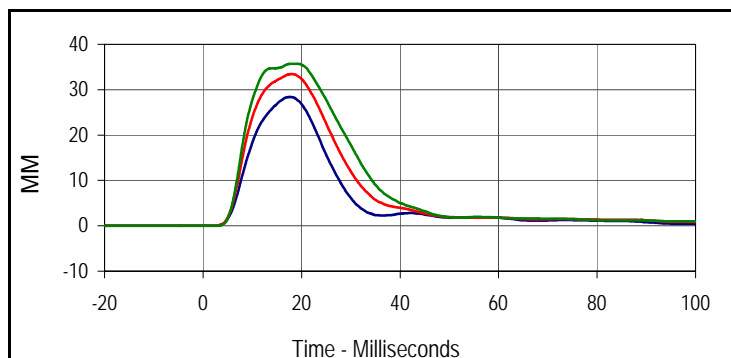

Curve Description			
Upper Thorax Deflection			
Plot No.	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
28.4	17.6	0.0	0.2
Middle Thorax Deflection			
Max	Time	Min	Time
33.4	17.9	0.0	-2.3
Lower Thorax Deflection			
Max	Time	Min	Time
35.7	18.3	0.0	-20.0

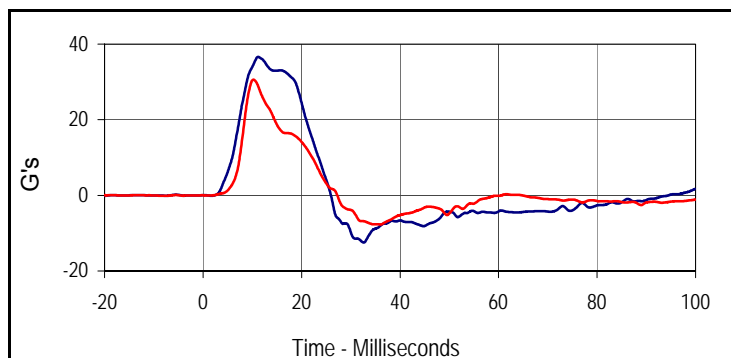


Curve Description			
Upper Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
004	FIL	180	G's
Max	Time	Min	Time
36.6	11.2	-12.5	32.6
Lower Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
005	FIL	180	G's
Max	Time	Min	Time
30.6	10.2	-7.7	36.0

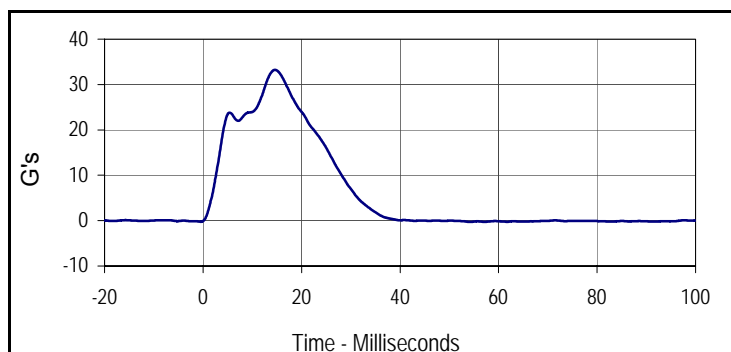

Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
006	FIL	180	G's
Max	Time	Min	Time
33.2	14.6	-0.3	54.3

Test Program: SID IIs Thorax with Arm Impact Test
 ATD Serial No.: 307

Test Date: 1/23/12
 Test I.D.: 307TWA01A

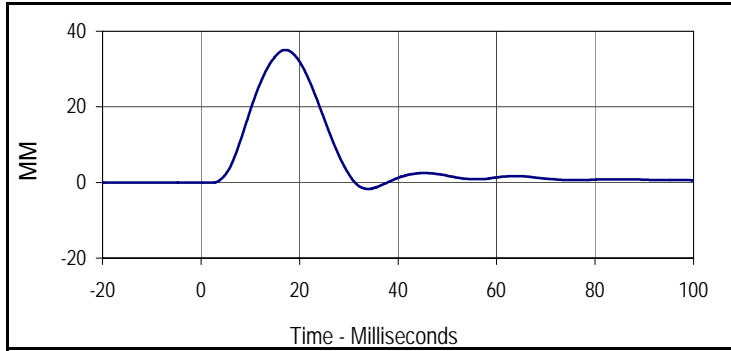


Curve Description			
Shoulder Deflection			
Plot No.	Type	SAE Class	Units
007	FIL	600	MM
Max	Time	Min	Time
35.0	16.9	-1.7	33.8

Test Program: SID IIs Thorax without Arm Impact Test
 ATD Serial No.: 307


Test Date: 1/23/12
 Test I.D.: 307TWOA01A




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥180	250	Pass
Temperature During Soak	Max	18.9 to 25.6	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	35.0	Pass
	Min		29.0	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	34.9	Pass
Impactor Velocity	m/s	4.2 to 4.4	4.3	Pass
Peak Upper Thorax Rib Deflection	mm	32 to 40	35.1	Pass
Peak Middle Thorax Rib Deflection	mm	39 to 45	41.9	Pass
Peak Lower Thorax Rib Deflection	mm	35 to 43	36.8	Pass
Peak Upper Spine Y Acceleration	G's	13 to 17	14.5	Pass
Peak Lower Spine Y Acceleration	G's	7 to 11	8.2	Pass
Peak Impactor Acceleration	G's	14 to 18	15.5	Pass
Overall Test Results				Pass

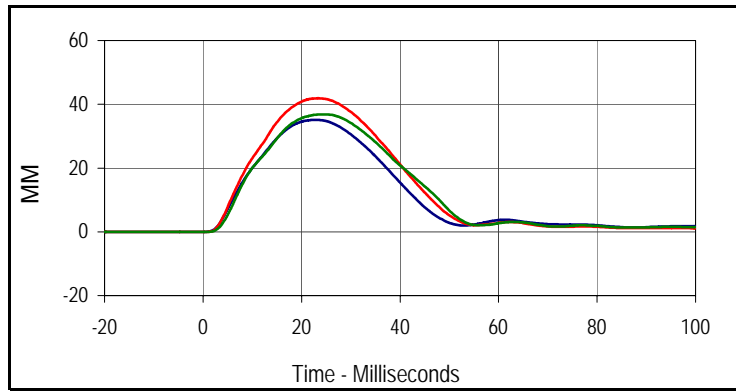

Curve Description			
Upper Thorax Deflection			
Plot No.	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
35.1	22.9	0.0	-5.6
Middle Thorax Deflection			
Max	Time	Min	Time
41.9	23.4	0.0	-3.8
Lower Thorax Deflection			
Max	Time	Min	Time
36.8	24.3	0.0	1.0

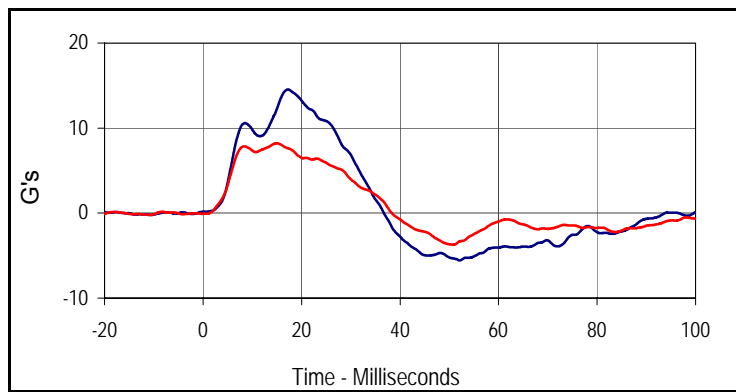

Curve Description			
Upper Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
004	FIL	180	G's
Max	Time	Min	Time
14.5	17.3	-5.6	52.1
Curve Description			
Lower Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
005	FIL	180	G's
Max	Time	Min	Time
8.2	15.0	-3.7	50.7

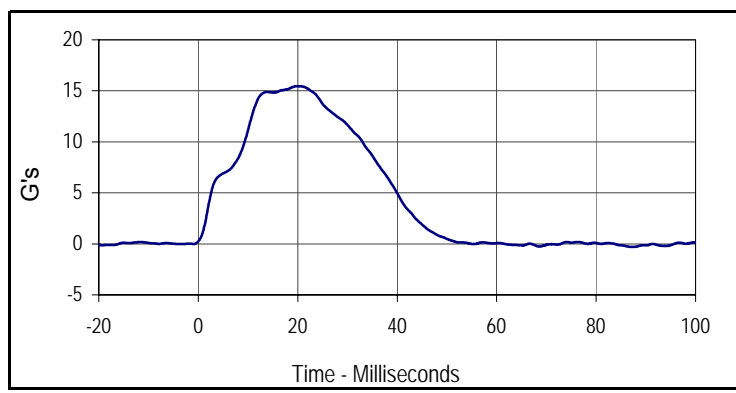


Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
006	FIL	180	G's
Max	Time	Min	Time
15.5	20.1	-0.3	87.2

Test Program: SID IIs Abdomen Impact Test
 ATD Serial No.: 307


Test Date: 1/23/12
 Test I.D.: 307ABD01A




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥180	270	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	35.0	Pass
	Min		29.0	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	31.9	Pass
Impactor Velocity	m/s	4.2 to 4.4	4.3	Pass
Peak Upper Abdominal Rib Deflection	mm	36 to 47	38.6	Pass
Peak Lower Abdominal Rib Deflection	mm	33 to 44	36.0	Pass
Peak Lower Spine Y Acceleration	G's	9 to 14	12.5	Pass
Peak Impactor Acceleration	G's	12 to 16	14.0	Pass
Overall Test Results				Pass

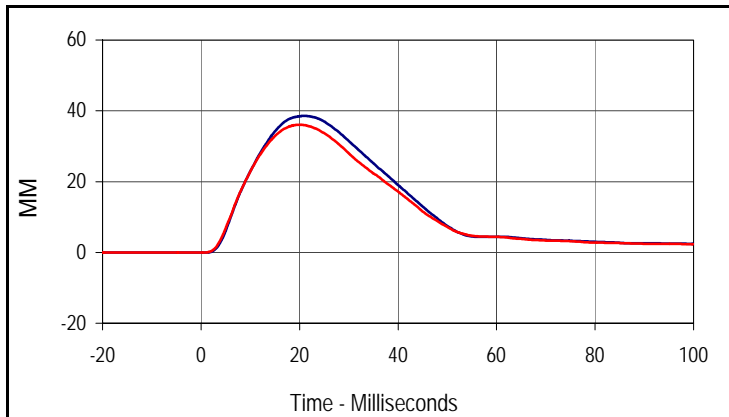

Curve Description			
Upper Abdominal Rib Deflection			
Plot No.	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
38.6	21.0	0.0	-3.0
Curve Description			
Lower Abdominal Rib Deflection			
Plot No.	Type	SAE Class	Units
002	FIL	600	MM
Max	Time	Min	Time
36.0	20.1	0.0	-2.6

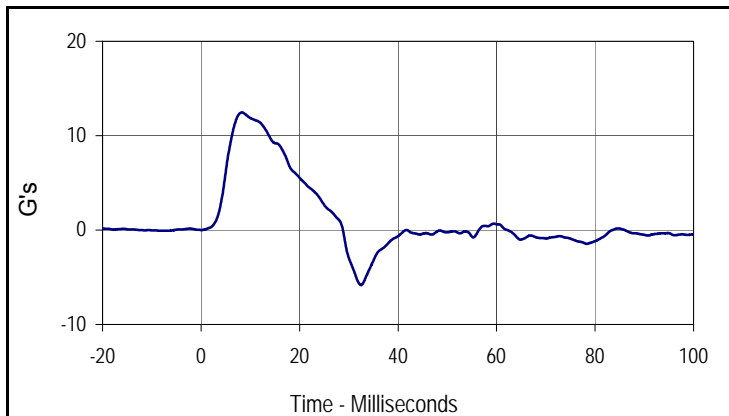


Curve Description			
Lower Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
12.5	8.3	-5.8	32.5

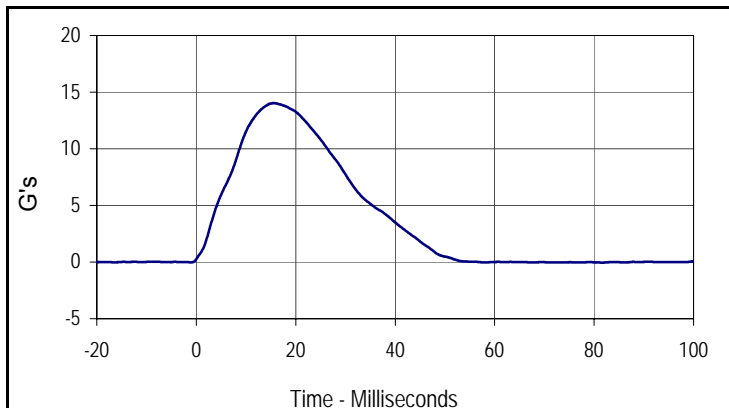

Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
004	FIL	180	G's
Max	Time	Min	Time
14.0	15.6	0.0	81.7

MIC5200 PRE TEST

Resultant Data - SIDIIs Plug Compression

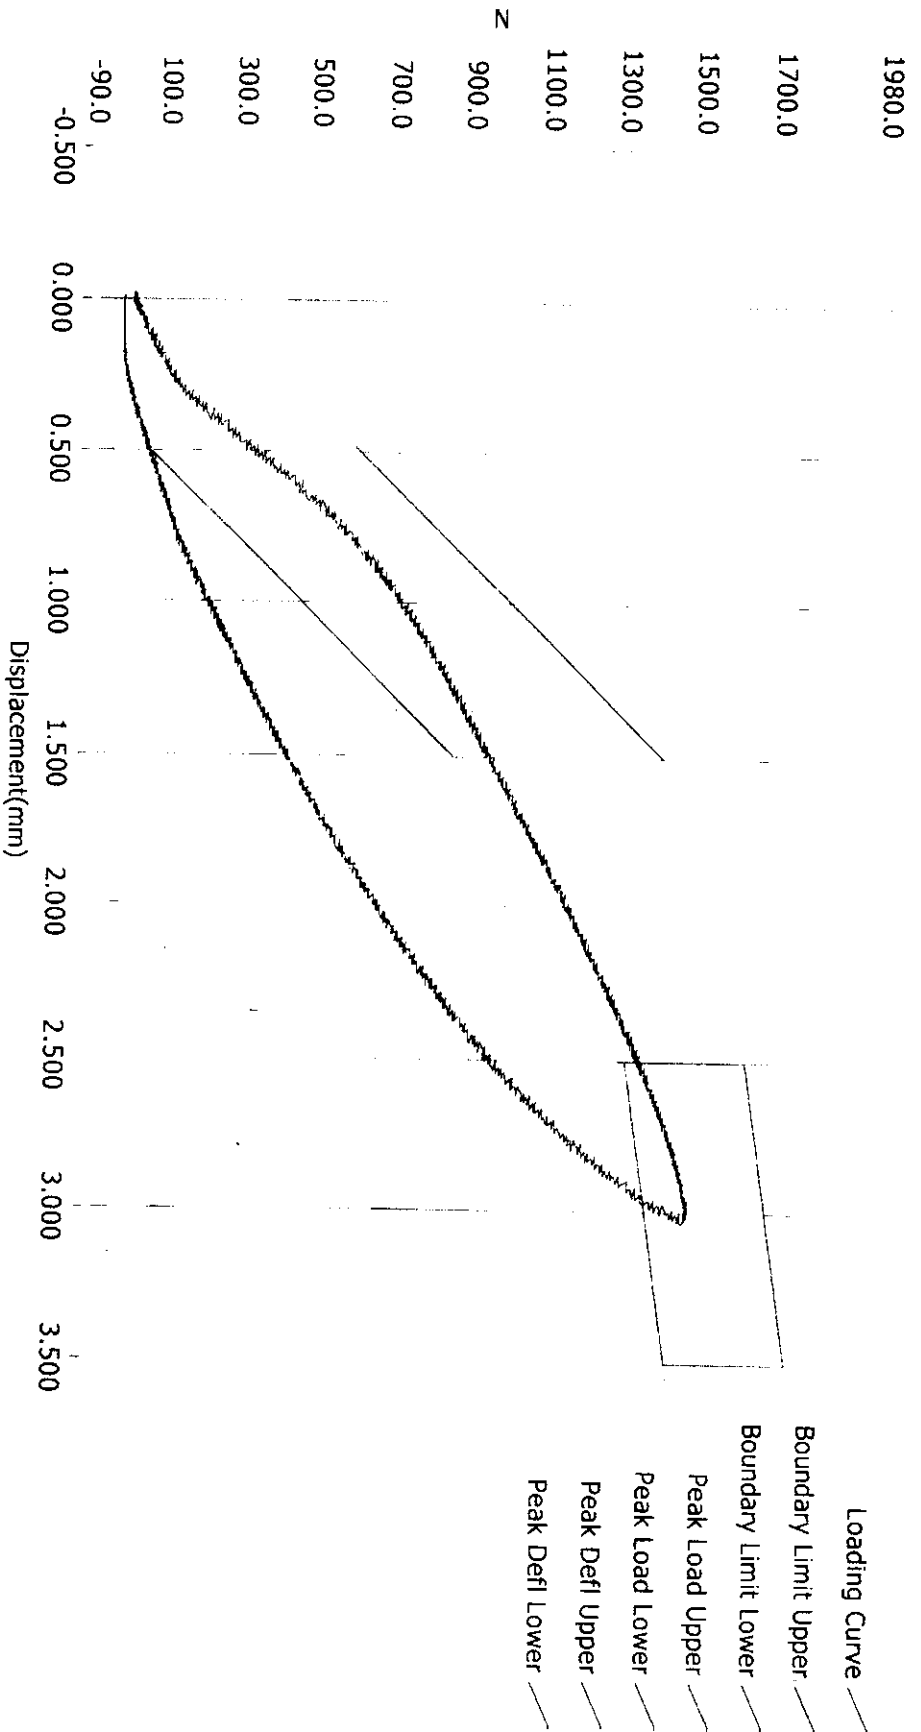

ATD Calibration Lab

<u>Test ID</u>	<u>Part Serial Number</u>	<u>Test Date</u>	<u>Test Time</u>
<u>Cert ID</u>	<u>ATD Serial Number</u>	<u>ATD Type</u>	
	36597	SIDIIs	

Current Date : 9/27/2010


Current Time : 17:13:39

Test Program: SID IIs Pelvis Acetabulum Impact Test
 ATD Serial No.: 307


Test Date: 1/9/12
 Test I.D.: 307ACET026




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥180	530	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.8	Pass
Humidity During Soak	Max	10.0 to 70.0	34.0	Pass
	Min		28.0	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.6	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	33.2	Pass
Impactor Velocity	m/s	6.6 to 6.8	6.7	Pass
Peak Acetabulum Force Y	Newtons	3600 to 4300	3994.2	Pass
Peak Pelvis Y Acceleration After 6 msec.	G's	34 to 42	36.0	Pass
Peak Impactor Acceleration	G's	38 to 47	40.1	Pass
Overall Test Results				Pass

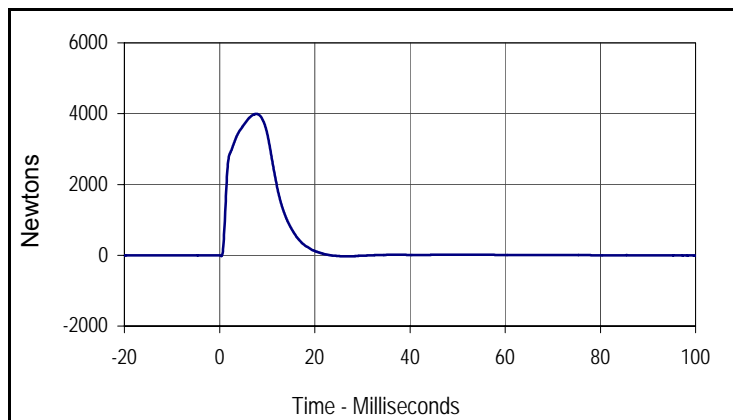

Curve Description			
Pelvis Acetabulum Force			
Plot No.	Type	SAE Class	Units
001	FIL	600	Newtons
Max	Time	Min	Time
3994.2	7.7	-33.1	27.0

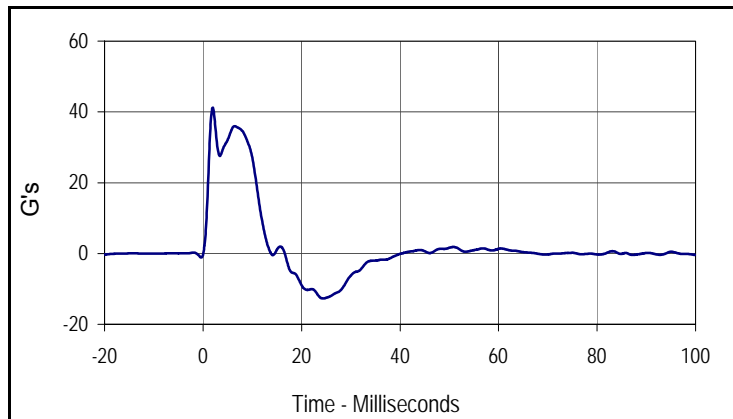

Curve Description			
Pelvis Y Acceleration			
Plot No.	Type	SAE Class	Units
002	FIL	180	G's
Max	Time	Min	Time
41.2	2.0	-12.7	24.3

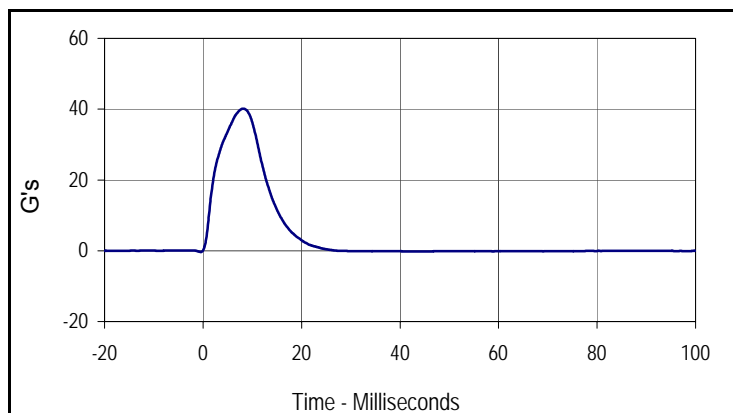


Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
40.1	8.2	-0.3	-0.5

Test Program: SID IIs Pelvis Iliac Calibration
 ATD Serial No.: 307


Test Date: 1/9/12
 Test I.D.: 307PL026




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥180	580	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	34.0	Pass
	Min		28.0	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.4	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	31.2	Pass
Impactor Velocity	m/s	4.2 to 4.4	4.3	Pass
Peak Iliac Force	Newtons	4100 to 5100	4394.5	Pass
Peak Pelvis Y Acceleration	G's	28 to 39	29.3	Pass
Peak Impactor Acceleration	G's	36 to 45	38.9	Pass
Overall Test Results				Pass

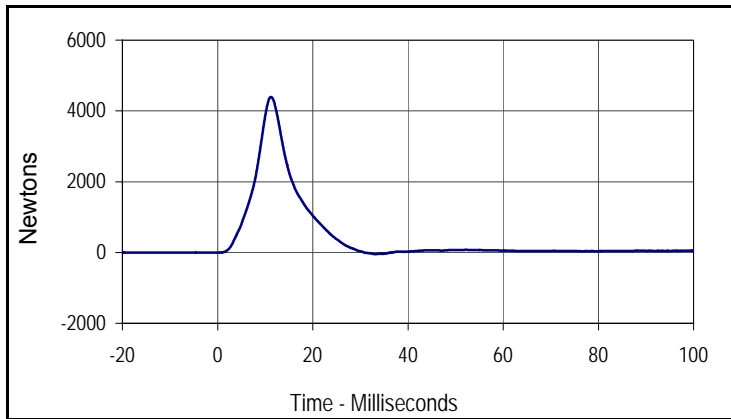

Curve Description			
Pelvis Iliac Force			
Plot No.	Type	SAE Class	Units
001	FIL	600	Newtons
Max	Time	Min	Time
4394.5	11.2	-48.6	33.2

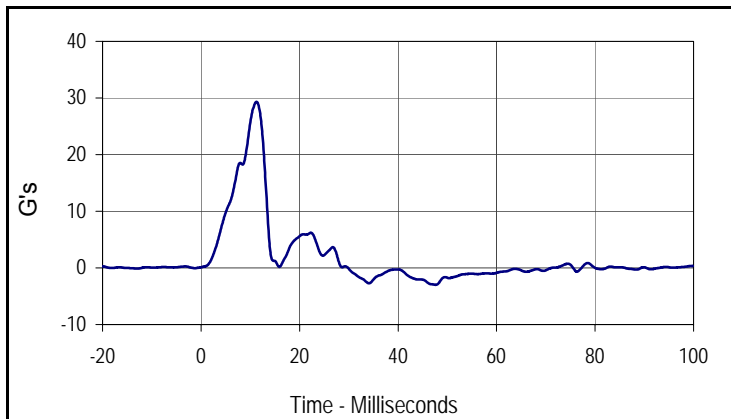

Curve Description			
Pelvis Y Acceleration			
Plot No.	Type	SAE Class	Units
002	FIL	180	G's
Max	Time	Min	Time
29.3	11.3	-3.0	47.6

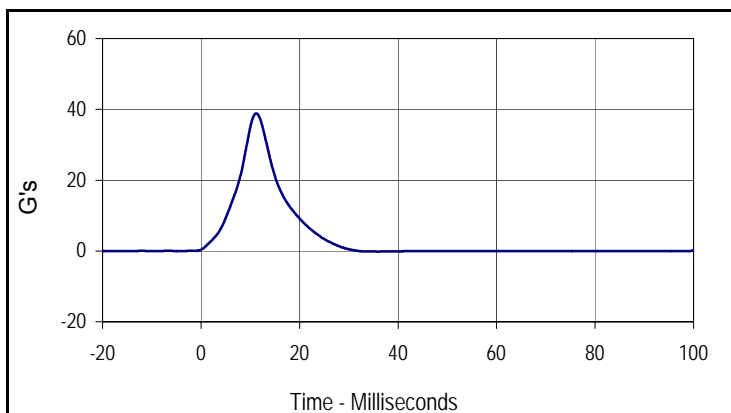

Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
38.9	11.2	-0.2	35.9

APPENDIX C
POST-TEST / ATD CONFIGURATION AND PERFORMANCE VERIFICATION DATA

Test Program: ES2re External Measurements

Test Date: 1/26/12

ATD Serial No.: F035

Test I.D.: N/A




Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	31	Pass
1 Sitting Height	mm	900 - 918	909	Pass
2 Seat to Shoulder Joint	mm	558 - 572	564	Pass
3 Seat to Lower Face of Thoracic Spine Box	mm	346 - 356	351	Pass
4 Seat to Hip Joint (Center of Bolt)	mm	97 - 103	100	Pass
5 Sole to Seat, Sitting	mm	333 - 451	382	Pass
6 Head Width	mm	152 - 158	156	Pass
7 Shoulder / Arm Width	mm	461 - 479	470	Pass
8 Thorax Width	mm	322 - 332	329	Pass
9 Abdomen Width	mm	273 - 287	280	Pass
10 Pelvis Lap Width	mm	359 - 373	361	Pass
11 Head Depth	mm	196 - 206	201	Pass
12 Thorax Depth	mm	262 - 272	270	Pass
13 Abdomen Width	mm	194 - 204	200	Pass
14 Pelvis Depth	mm	235 - 245	240	Pass
15 Back of Buttocks to Hip Joint (Center of Bolt)	mm	150 - 160	155	Pass
16 Back of Buttocks to Front Knee	mm	597 - 615	610	Pass
Overall Test Results				Pass

Test Program: ES2re Head Drop Test
 ATD Serial No.: F035


Test Date: 1/26/12
 Test I.D.: F035HD024




Tested Parameter	Units	Specification	Result	Pass/Fail
Head Assembly Soak Time	Minutes	≥240	240	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	35.0	Pass
	Min		29.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	34.7	Pass
Peak Head Resultant Acceleration	G's	125 to 155	141.1	Pass
Peak Head X Acceleration	G's	≤15	4.9	Pass
Is Acceleration Unimodal?	Yes/No	Yes	Yes	Pass
Oscillations After Main Pulse	%	<15	8.3	Pass
Overall Test Results				Pass

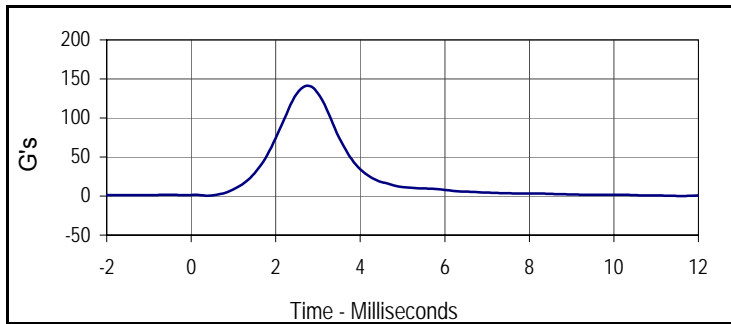


Curve Description			
Head Resultant			
Plot No.	Type	SAE Class	Units
001	RES	1000	G's
Max	Time	Min	Time
141.1	2.8	0.5	0.4

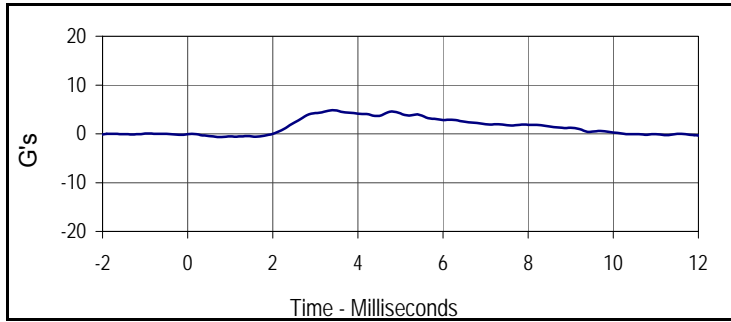

Curve Description			
Head X			
Plot No.	Type	SAE Class	Units
002	FIL	1000	G's
Max	Time	Min	Time
4.9	3.4	-0.6	0.8

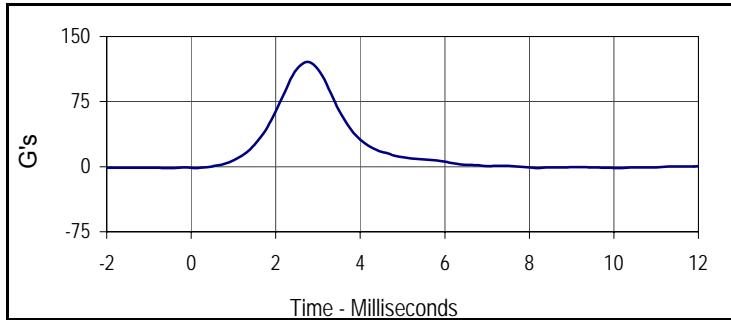

Curve Description			
Head Y			
Plot No.	Type	SAE Class	Units
003	FIL	1000	G's
Max	Time	Min	Time
120.4	2.8	-1.6	-0.5

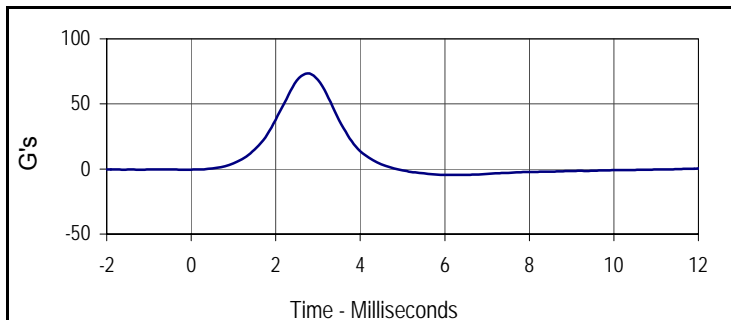


Curve Description			
Head Z			
Plot No.	Type	SAE Class	Units
004	FIL	1000	G's
Max	Time	Min	Time
73.5	2.8	-4.5	6.0

Test Program: ES2re Neck Flexion Test
 ATD Serial No.: F035


Test Date: 1/26/12
 Test I.D.: F035NB024




Tested Parameter	Units	Specification	Result	Pass/Fail
Neck Assembly Soak Time	Minutes	≥240	280	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	35.0	Pass
	Min		29.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	34.5	Pass
Pendulum Velocity	m/s	3.3 to 3.5	3.4	Pass
Headform Flexion	Max	49 to 59	49.5	Pass
	Time	54 to 66	58.3	Pass
Headform Flexion Decay (Peak to Zero)	msec	53 to 88	63.5	Pass
Overall Test Results				Pass

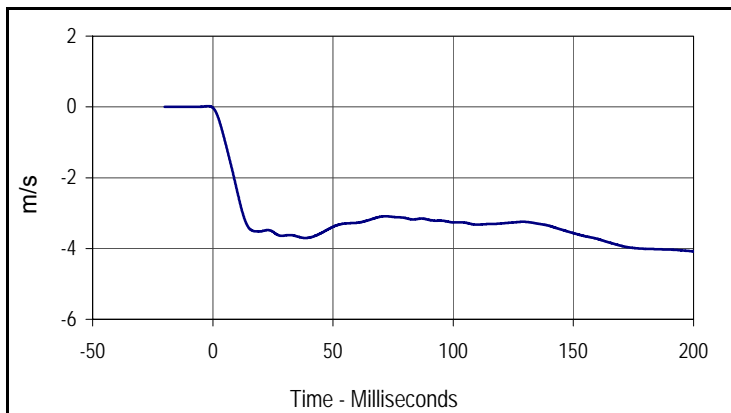

Curve Description			
Pendulum Velocity			
Plot No.	Type	SAE Class	Units
001	FIL	60	m/s
Max	Time	Min	Time
0.0	-1.9	-4.1	200.0

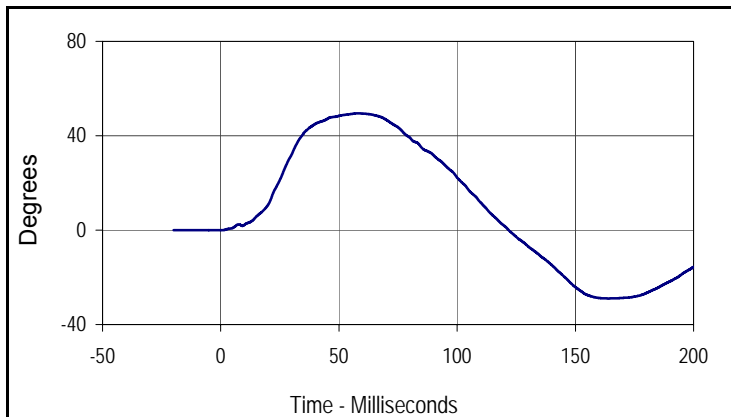

Curve Description			
Headform Rotation			
Plot No.	Type	SAE Class	Units
002	FIL	180	Degrees
Max	Time	Min	Time
49.5	58.3	-29.0	164.0

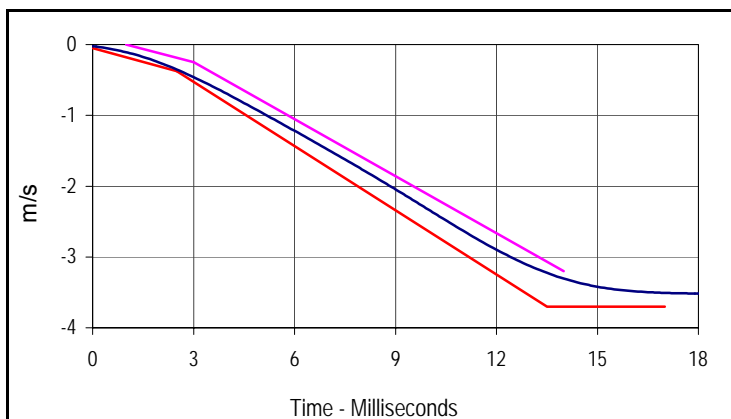


Curve Description			
Pendulum Velocity			
Plot No.	Type	SAE Class	Units
001	FIL	60	m/s
Max	Time	Min	Time
0.0	-1.9	-4.1	200.0

Velocity Corridors


Upper Boundary		Lower Boundary	
Time (msec)	Velocity (m/s)	Time (msec)	Velocity (m/s)
1.0	0.00	0.0	-0.05
3.0	-0.03	2.5	-0.375
14.0	-3.20	13.5	-3.70
		17.0	-3.70

Test Program: ES2re Neck Flexion Test
 ATD Serial No.: F035


Test Date: 1/26/12
 Test I.D.: F035NB024

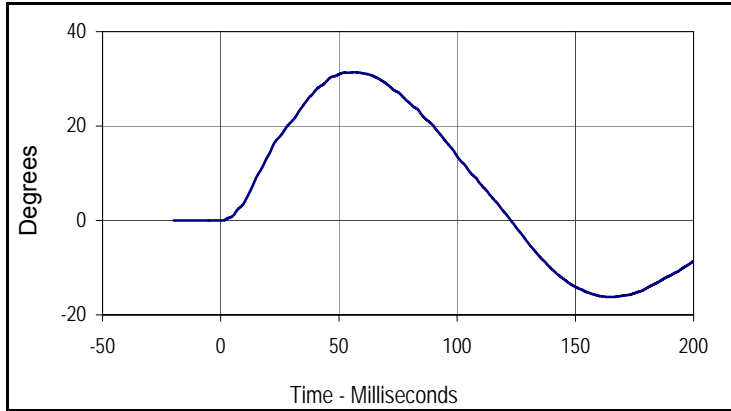

Curve Description			
Potentiometer A			
Plot No.	Type	SAE Class	Units
003	FIL	180	Degrees
Max	Time	Min	Time
31.4	56.4	-16.2	163.9

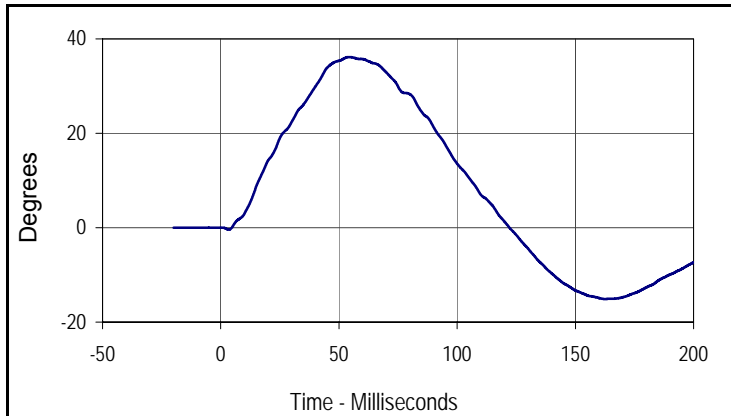

Curve Description			
Potentiometer B			
Plot No.	Type	SAE Class	Units
004	FIL	180	Degrees
Max	Time	Min	Time
36.2	54.2	-15.1	162.6

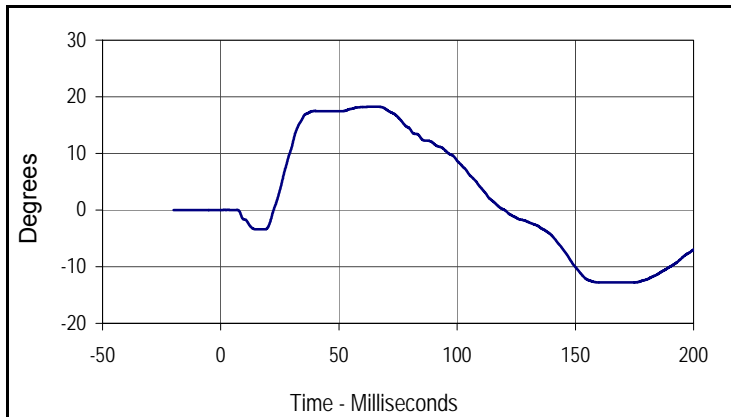


Curve Description			
Potentiometer C			
Plot No.	Type	SAE Class	Units
005	FIL	180	Degrees
Max	Time	Min	Time
18.3	63.8	-12.8	169.6

Test Program: ES2re Shoulder Impact Test
 ATD Serial No.: F035

Test Date: 1/26/12
 Test I.D.: F035SH024



Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥240	310	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	35.0	Pass
	Min		29.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.1	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	31.2	Pass
Pendulum Speed	m/s	4.2 to 4.4	4.2	Pass
Peak Impactor Acceleration	G's	7.5 to 10.5	9.7	Pass
Overall Test Results				Pass

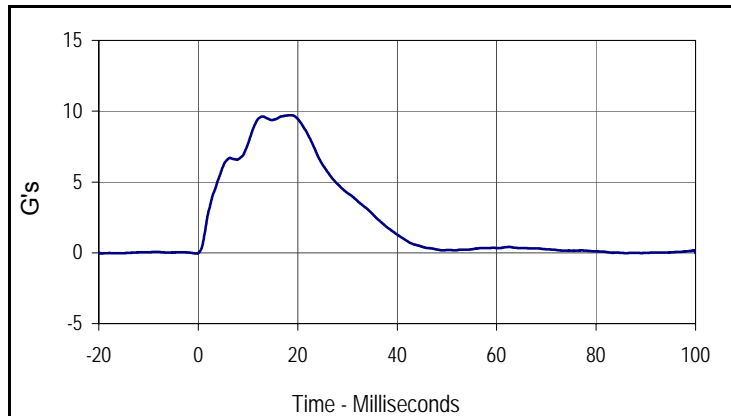


Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
001	FIL	180	G's
Max	Time	Min	Time
9.7	18.6	0.0	-0.4

Test Program: ES2re Thorax - Rib Drop Test
 ATD Serial No.: F035 Rib #1


Test Date: 1/26/12
 Test I.D.: F035RB1024



Tested Parameter	Units	Specification	Result	Pass/Fail
Rib Module Soak Time	Minutes	≥240	350	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	35.0	Pass
	Min		29.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.3	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	34.9	Pass
Peak Rib Deflection at 459 +/- 5 mm Drop Height	mm	36 to 40	37.2	Pass
Peak Rib Deflection at 815 +/- 8 mm Drop Height	mm	46 to 51	47.1	Pass
Overall Test Results				Pass

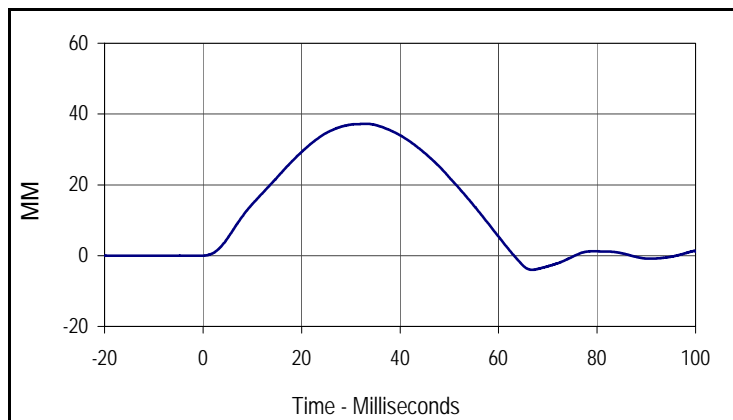

Curve Description			
Upper Rib Deflection (459 mm Drop Height)			
Plot No.	Type	SAE Class	Units
001	FIL	180	MM
Max	Time	Min	Time
37.2	33.5	-4.0	66.8

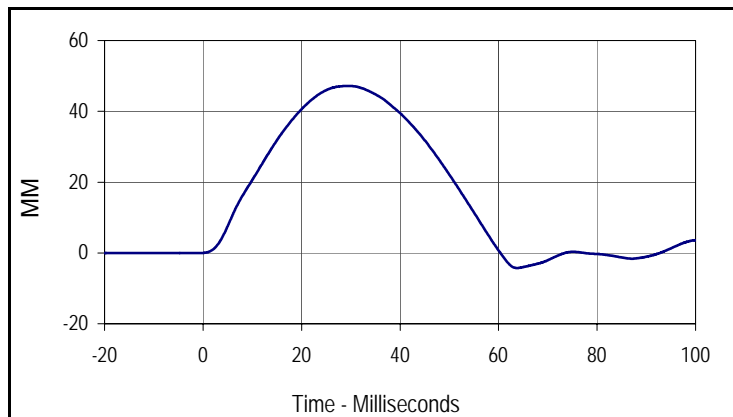


Curve Description			
Upper Rib Deflection (815 mm Drop Height)			
Plot No.	Type	SAE Class	Units
002	FIL	180	MM
Max	Time	Min	Time
47.1	29.9	-4.3	63.7

Test Program: ES2re Thorax - Rib Drop Test
 ATD Serial No.: F035 Rib #2


Test Date: 1/26/12
 Test I.D.: F035RB2024



Tested Parameter	Units	Specification	Result	Pass/Fail
Rib Module Soak Time	Minutes	≥240	390	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	35.0	Pass
	Min		29.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	32.5	Pass
Peak Rib Deflection at 459 +/- 5 mm Drop Height	mm	36 to 40	37.9	Pass
Peak Rib Deflection at 815 +/- 8 mm Drop Height	mm	46 to 51	48.0	Pass
Overall Test Results				Pass

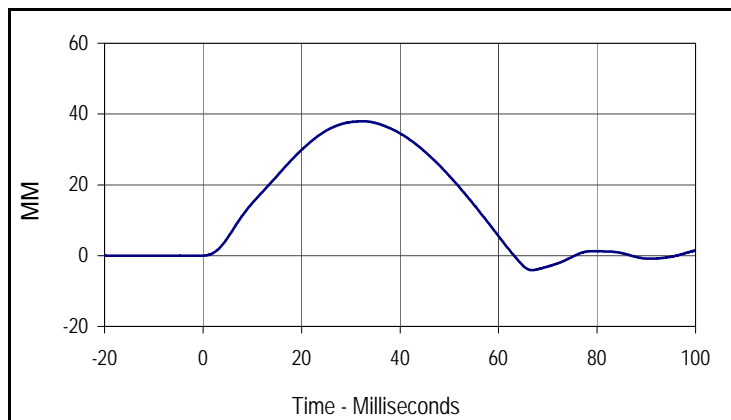

Curve Description			
Middle Rib Deflection (459 mm Drop Height)			
Plot No.	Type	SAE Class	Units
001	FIL	180	MM
Max	Time	Min	Time
37.9	32.6	-4.1	66.8

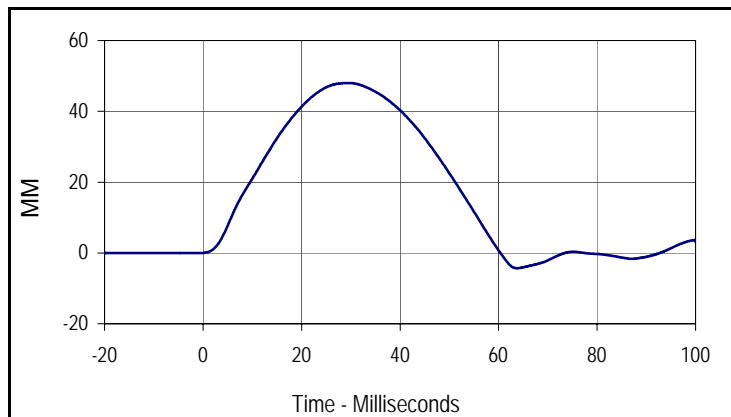


Curve Description			
Middle Rib Deflection (815 mm Drop Height)			
Plot No.	Type	SAE Class	Units
002	FIL	180	MM
Max	Time	Min	Time
48.0	29.7	-4.3	63.7

Test Program: ES2re Thorax - Rib Drop Test
 ATD Serial No.: F035 Rib # 3


Test Date: 1/26/12
 Test I.D.: F035RB3024



Tested Parameter	Units	Specification	Result	Pass/Fail
Rib Module Soak Time	Minutes	≥240	420	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	35.0	Pass
	Min		29.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.6	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	33.6	Pass
Peak Rib Deflection at 459 +/- 5 mm Drop Height	mm	36 to 40	38.8	Pass
Peak Rib Deflection at 815 +/- 8 mm Drop Height	mm	46 to 51	49.5	Pass
Overall Test Results				Pass

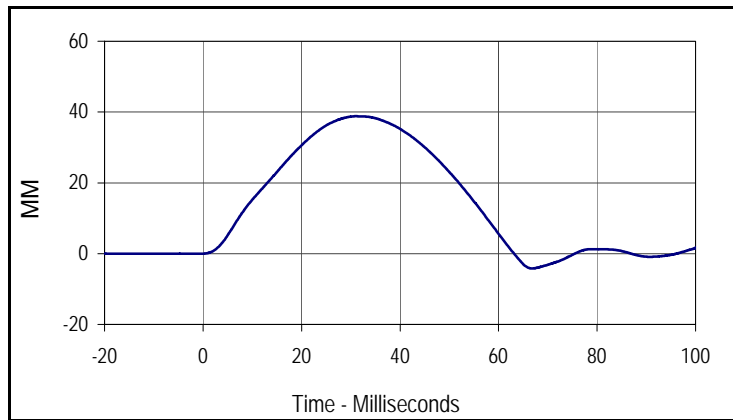

Curve Description			
Lower Rib Deflection (459 mm Drop Height)			
Plot No.	Type	SAE Class	Units
001	FIL	180	MM
Max	Time	Min	Time
38.8	31.0	-4.2	66.8

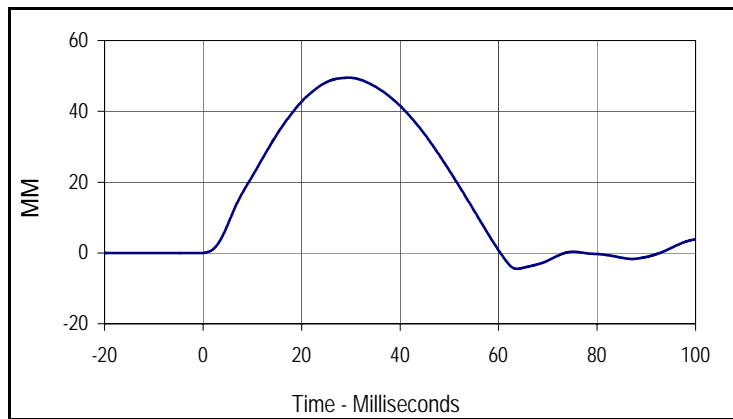


Curve Description			
Lower Rib Deflection (815 mm Drop Height)			
Plot No.	Type	SAE Class	Units
001	FIL	180	MM
Max	Time	Min	Time
49.5	29.7	-4.5	63.7

Test Program: ES2re Thorax - Full Body Impact Test
 ATD Serial No.: F035


Test Date: 1/26/12
 Test I.D.: F035TH024




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥240	440	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	35.0	Pass
	Min		29.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.1	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	34.6	Pass
Peak Impactor Velocity	m/s	5.4 to 5.6	5.5	Pass
Peak Impactor Force	N	5100 to 6200	5564.0	Pass
	msec	> 6.0 msec	12.9	Pass
Peak Upper Rib Deflection	mm	34 to 41	37.0	Pass
Peak Middle Rib Deflection	mm	37 to 45	41.8	Pass
Peak Lower Rib Deflection	mm	37 to 44	40.6	Pass
Overall Test Results				Pass

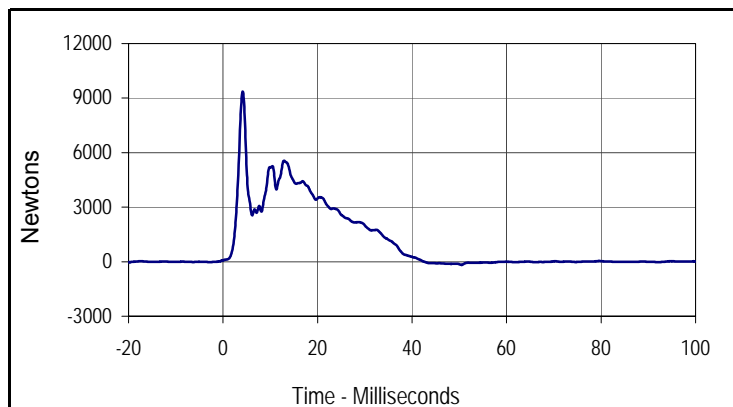

Curve Description			
Impactor Force			
Plot No.	Type	SAE Class	Units
001	FIL	180	Newtons
Max	Time	Min	Time
9364.2	4.2	-174.5	50.5

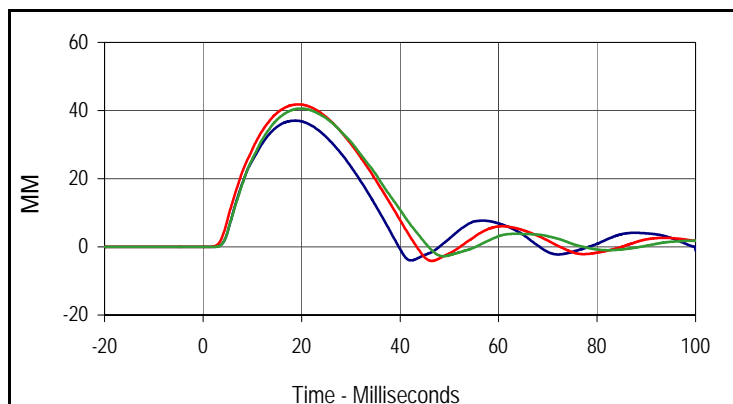

Curve Description			
Upper, Middle, Lower Rib Deflections			
Plot No.	Type	SAE Class	Units
002	FIL	180	MM
Max (Upper)	Time	Min (Upper)	Time
37.0	18.7	-4.0	42.2
Max (Middle)	Time	Min (Middle)	Time
41.8	19.4	-4.1	46.4
Max (Lower)	Time	Min (Lower)	Time
40.6	19.8	-2.8	48.8

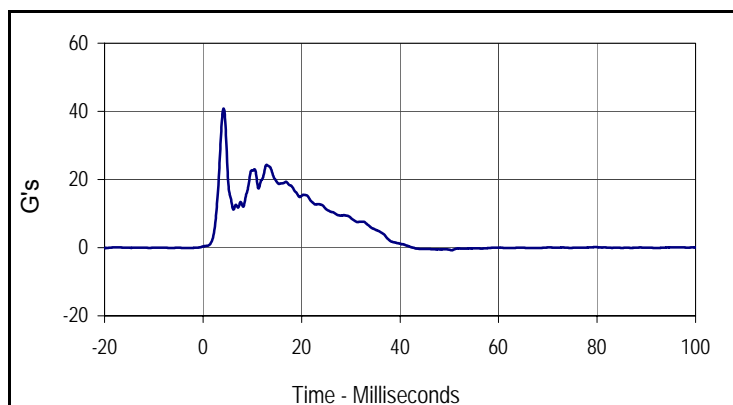


Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
40.9	4.2	-0.8	50.5

Test Program: ES2re Abdomen Impact Test
 ATD Serial No.: F035


Test Date: 1/26/12
 Test I.D.: F035ABD024



Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥240	450	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	35.0	Pass
	Min		29.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.3	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	29.9	Pass
Probe Velocity	m/s	3.9 to 4.1	4.0	Pass
Peak Impactor Force	N	4000 to 4800	4487.0	Pass
	msec	10.6 to 13.0	12.4	Pass
Sum of Abdominal Forces	N	2200 to 2700	2301.7	Pass
	msec	10.0 to 12.3	11.1	Pass
Overall Test Results				Pass

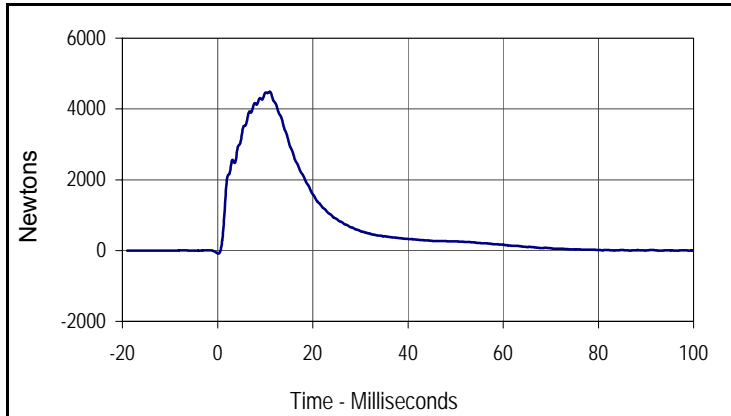


Curve Description			
Impactor Force			
Plot No.	Type	SAE Class	Units
001	FIL	180	Newtons
Max	Time	Min	Time
4487.0	12.4	-85.3	1.6

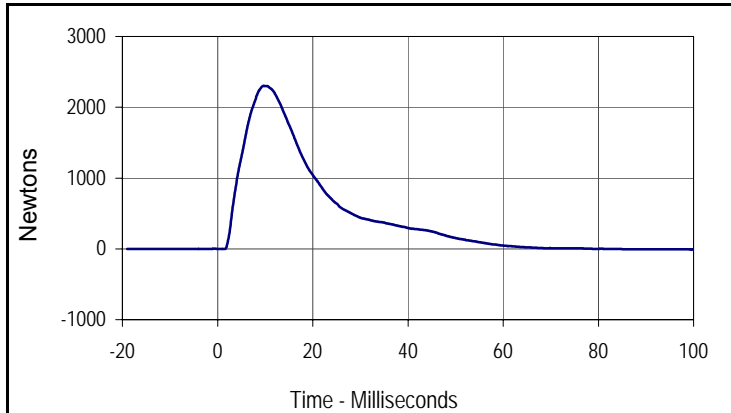


Curve Description			
Abdomen Sum Resultant			
Plot No.	Type	SAE Class	Units
002	RES	600	Newtons
Max	Time	Min	Time
2301.7	11.1	-8.5	#N/A

Test Program: ES2re Abdomen Impact Test
 ATD Serial No.: F035


Test Date: 1/26/12
 Test I.D.: F035ABD024

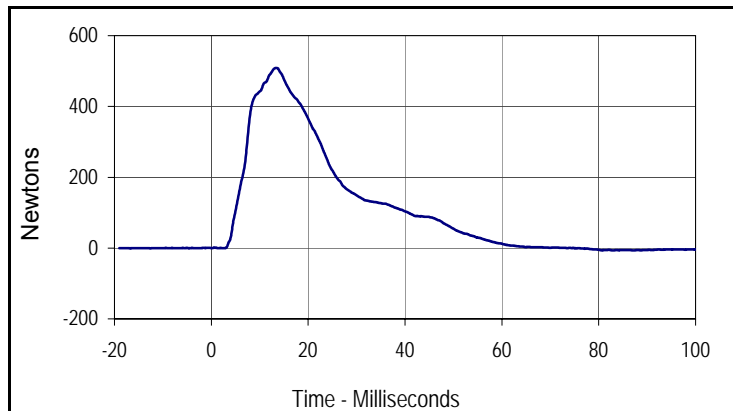

Curve Description			
Front Abdomen Force			
Plot No.	Type	SAE Class	Units
003	FIL	600	Newtons
Max	Time	Min	Time
509.0	13.5	-8.5	102.2

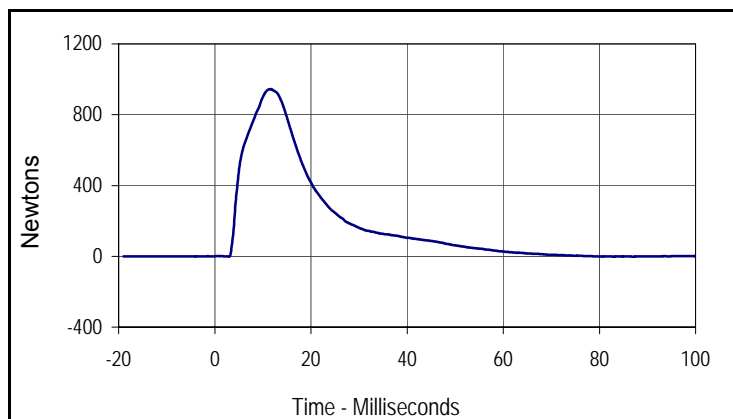

Curve Description			
Middle Abdomen Force			
Plot No.	Type	SAE Class	Units
004	FIL	600	Newtons
Max	Time	Min	Time
944.3	11.7	-8.5	102.2

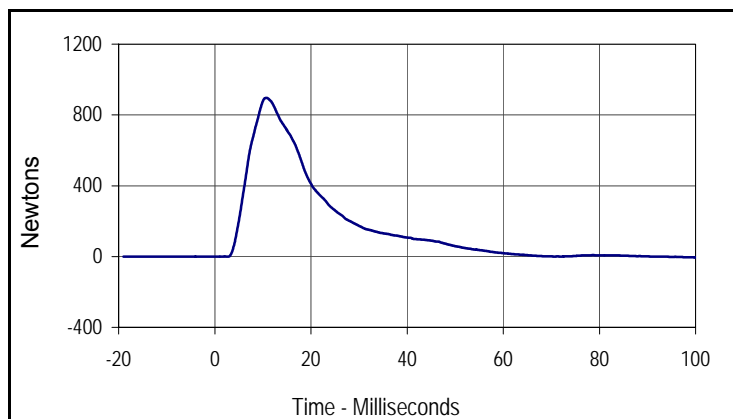


Curve Description			
Rear Abdomen Force			
Plot No.	Type	SAE Class	Units
005	FIL	600	Newtons
Max	Time	Min	Time
896.1	10.7	-8.5	102.2

Test Program: ES2re Lumbar Flexion Test
 ATD Serial No.: F035


Test Date: 1/26/12
 Test I.D.: F035LB024




Tested Parameter	Units	Specification	Result	Pass/Fail
Lumbar Spine Assembly Soak Time	Minutes	≥240	370	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	35.0	Pass
	Min		29.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	36.7	Pass
Pendulum Velocity	m/s	5.95 to 6.15	6.10	Pass
Headform Rotation	Max	45 to 55	50.1	Pass
	Time	39 to 53	42.9	Pass
Time of Decay to Zero Angle from Peak	msec	37 to 57	39.5	Pass
Overall Test Results				Pass

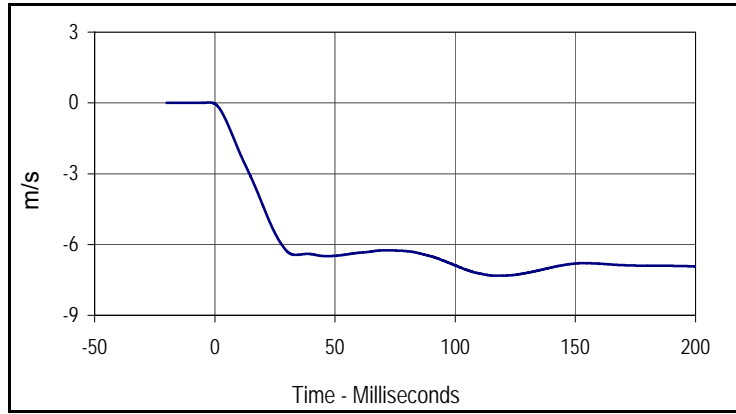

Curve Description			
Pendulum Velocity			
Plot No.	Type	SAE Class	Units
001	FIL	60	m/s
Max	Time	Min	Time
0.0	-2.2	-7.3	117.6

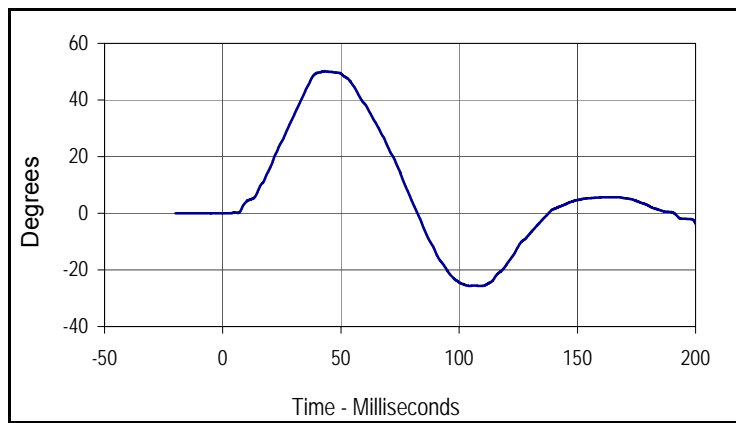

Curve Description			
Headform Rotation			
Plot No.	Type	SAE Class	Units
002	FIL	180	Degrees
Max	Time	Min	Time
50.1	42.9	-25.7	108.4

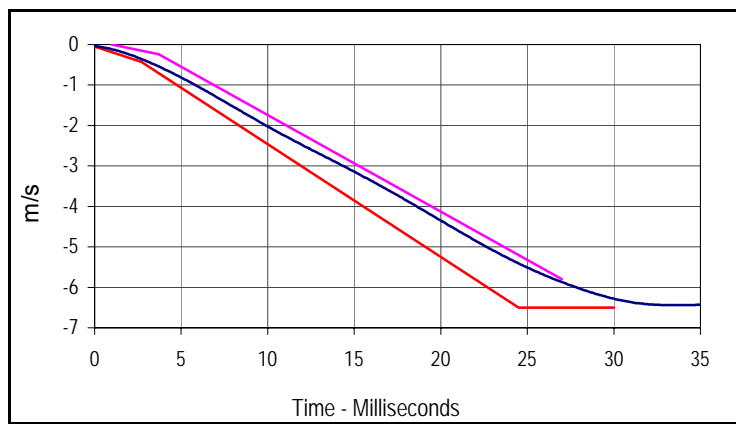


Curve Description			
Pendulum Velocity			
Plot No.	Type	SAE Class	Units
001	FIL	60	m/s
Max	Time	Min	Time
0.0	-2.2	-7.3	117.6


Upper Boundary		Lower Boundary	
Time (msec)	Velocity (m/s)	Time (msec)	Velocity (m/s)
1.0	0.00	0.0	-0.05
3.7	-0.24	2.7	-0.425
27.0	-5.80	24.5	-6.50
		30.0	-6.50

Test Program: ES2re Lumbar Flexion Test
 ATD Serial No.: F035


Test Date: 1/26/12
 Test I.D.: F035LB024

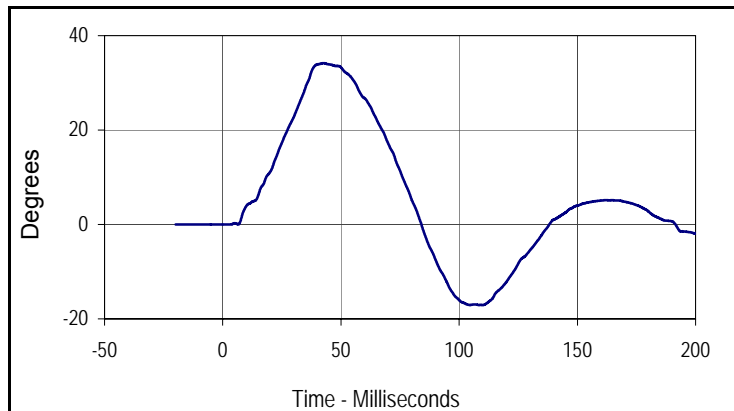

Curve Description			
Potentiometer A			
Plot No.	Type	SAE Class	Units
003	FIL	180	Degrees
Max	Time	Min	Time
34.2	42.6	-17.1	110.0

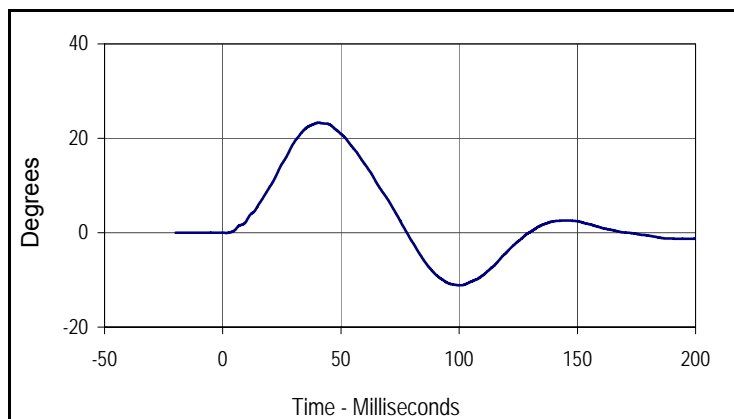

Curve Description			
Potentiometer B			
Plot No.	Type	SAE Class	Units
004	FIL	180	Degrees
Max	Time	Min	Time
23.3	40.5	-11.1	100.5

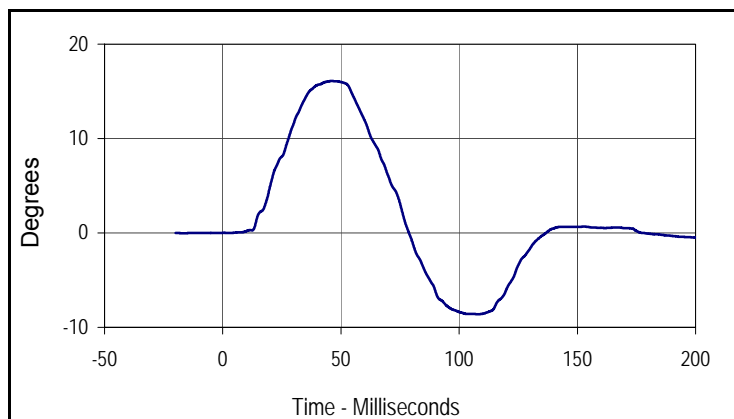


Curve Description			
Potentiometer C			
Plot No.	Type	SAE Class	Units
005	FIL	180	Degrees
Max	Time	Min	Time
16.1	46.0	-8.6	107.6

Test Program: ES2re Pelvis Impact Test
 ATD Serial No.: F035


Test Date: 1/26/12
 Test I.D.: F035PL024




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥240	480	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	35.0	Pass
	Min		29.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.3	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	31.6	Pass
Pendulum Velocity	m/s	4.2 to 4.4	4.4	Pass
Peak Impactor Force	N	4700 to 5400	5003.5	Pass
	msec	11.8 to 16.1	14.4	Pass
Peak Pubic Symphysis Load	N	-1230 to -1590	-1452.0	Pass
	msec	12.2 to 17.0	14.8	Pass
Overall Test Results				Pass

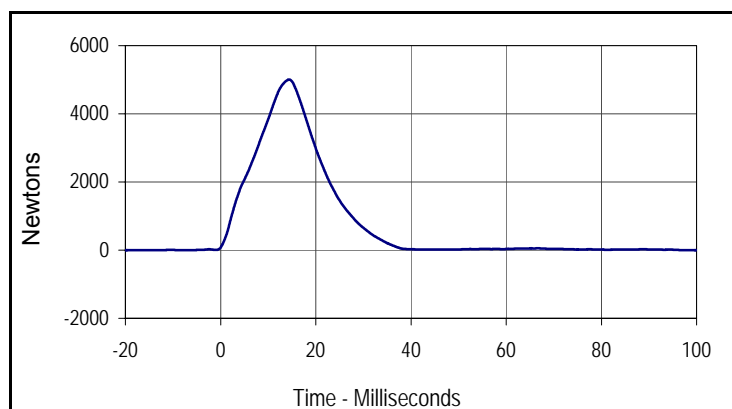

Curve Description			
Impactor Force			
Plot No.	Type	SAE Class	Units
001	FIL	180	Newtons
Max	Time	Min	Time
5003.5	14.4	-3.3	-17.5

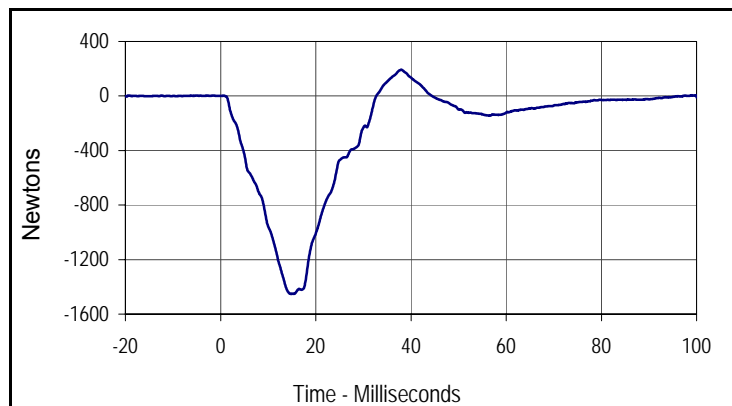

Curve Description			
Pubic Symphysis Force Y			
Plot No.	Type	SAE Class	Units
002	FIL	600	Newtons
Max	Time	Min	Time
193.2	38.0	-1452.0	14.8

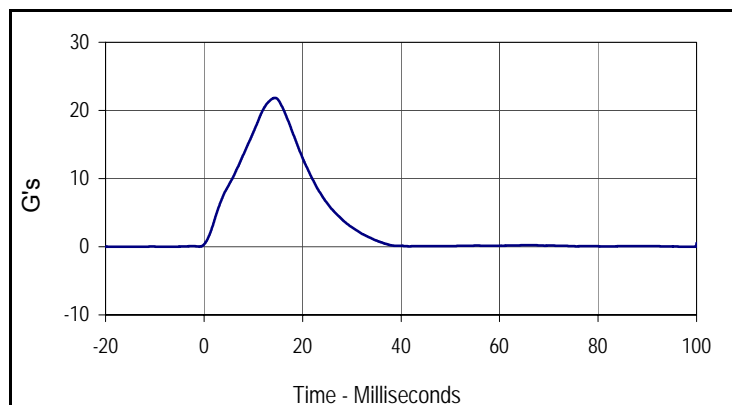

Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
21.8	14.4	0.0	-17.5

Test Program: SID IIs External Measurements
 ATD Serial No.: 307

Test Date: 1/24/12
 Test I.D.: N/A



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	33	Pass
A Sitting Height	mm	772 - 788	780	Pass
B Shoulder Pivot Height	mm	437 - 453	444	Pass
C H-Point Height	mm	79 - 89	83	Pass
D H-Point from Seatback	mm	141 - 151	145	Pass
E Shoulder Pivot from Backline	mm	97 - 107	102	Pass
F Thigh Clearance	mm	119 - 135	125	Pass
G Head Breadth	mm	140 - 148	145	Pass
H Head Back from Backline	mm	40 - 46	43	Pass
I Head Depth	mm	178 - 188	182	Pass
J Head Circumference	mm	541 - 551	547	Pass
K Buttock to Knee Length	mm	514 - 540	526	Pass
L Popliteal Height	mm	343 - 369	349	Pass
M Knee Pivot to Floor Height	mm	392 - 409	399	Pass
N Buttock Popliteal Length	mm	416 - 442	430	Pass
O Chest Depth w/o Jacket	mm	195 - 211	205	Pass
P Foot Length	mm	216 - 232	221	Pass
Q Hip Breadth with Pelvic Plug	mm	313 - 323	317	Pass
R Arm Length	mm	249 - 259	252	Pass
S Knee Joint to Seatback	mm	477 - 493	480	Pass
V Shoulder Width	mm	341 - 357	351	Pass
W Foot Width	mm	78 - 94	89	Pass
Y Chest Circumference with Jacket	mm	851 - 881	875	Pass
Z Waist Circumference	mm	760 - 791	774	Pass
Overall Test Results				Pass

Test Program: SID IIs Head Drop Test
 ATD Serial No.: 307


Test Date: 1/24/12
 Test I.D.: 307HD027




Tested Parameter	Units	Specification	Result	Pass/Fail
Head Assembly Soak Time	Minutes	≥240	250	Pass
Temperature During Soak	Max	18.9 to 25.6	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	34.0	Pass
	Min		28.0	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	28.4	Pass
Peak Head Resultant Acceleration	G's	115 to 137	123.6	Pass
Peak Head X Acceleration	G's	<15	2.5	Pass
Is Acceleration Unimodal?	Yes/No	Yes	Yes	Pass
Oscillations After Main Pulse	%	<15	11.1	Pass
Overall Test Results				Pass




Curve Description			
Head Resultant			
Plot No.	Type	SAE Class	Units
001	RES	1000	G's
Max	Time	Min	Time
123.6	3.1	0.4	0.3

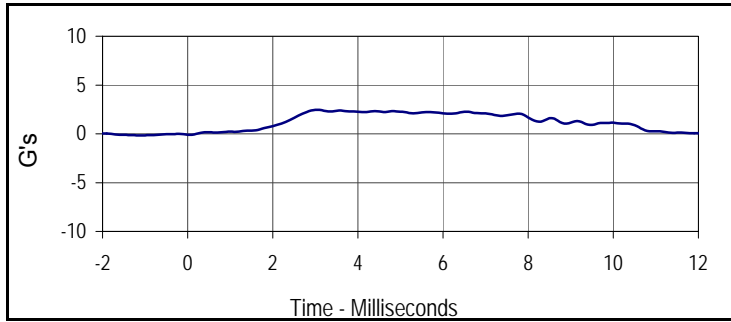

Curve Description			
Head X			
Plot No.	Type	SAE Class	Units
002	FIL	1000	G's
Max	Time	Min	Time
2.5	3.0	-0.2	-1.1

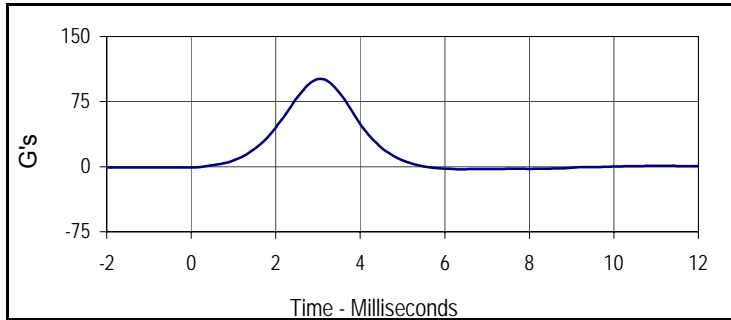

Curve Description			
Head Y			
Plot No.	Type	SAE Class	Units
003	FIL	1000	G's
Max	Time	Min	Time
101.1	3.1	-3.1	6.4

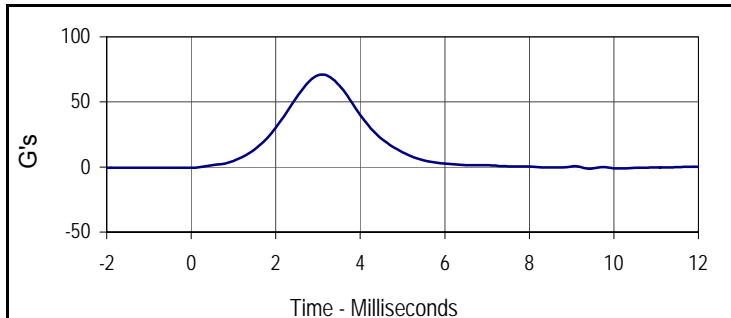


Curve Description			
Head Z			
Plot No.	Type	SAE Class	Units
004	FIL	1000	G's
Max	Time	Min	Time
71.0	3.1	-1.3	9.4

Test Program: SID IIs Neck Flexion Test
 ATD Serial No.: 307


Test Date: 1/24/12
 Test I.D.: 307NB027




Tested Parameter	Units	Specification	Result	Pass/Fail	
Neck Assembly Soak Time	Minutes	≥240	340	Pass	
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass	
	Min		20.7	Pass	
Humidity During Soak	Max	10.0 to 70.0	34.0	Pass	
	Min		28.0	Pass	
Laboratory Temperature During Test	°C	20.6 to 22.2	21.2	Pass	
Laboratory Humidity During Test	%	10.0 to 70.0	32.7	Pass	
Pendulum Velocity	m/s	5.51 to 5.63	5.58	Pass	
Pendulum Deceleration	10 msec	m/s	-2.20 to -2.80	-2.56	Pass
	15 msec	m/s	-3.30 to -4.10	-3.83	Pass
	20 msec	m/s	-4.40 to -5.40	-5.07	Pass
	25 msec	m/s	-5.40 to -6.10	-5.91	Pass
	25-100 msec	m/s	-5.50 to -6.20	-6.13	Pass
D-Plane Rotation	Max	Degrees	71 to 81	79.1	Pass
	Time	msec	50 to 70	65.6	Pass
Peak Occipital Condyle Moment	Nm	-36 to -44	-41.3	Pass	
Decaying Moment Time to Cross 0 Nm	msec	102 to 126	121.4	Pass	
Overall Test Results			Pass		

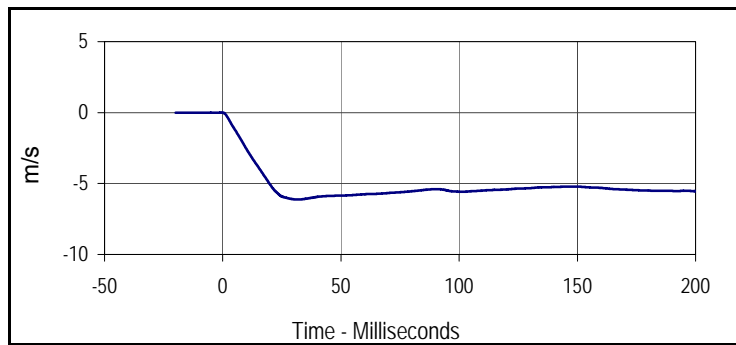

Curve Description			
Pendulum Velocity			
Plot No.	Type	SAE Class	Units
001	FIL	180	m/s
Max	Time	Min	Time
0.0	-0.6	-6.1	31.4

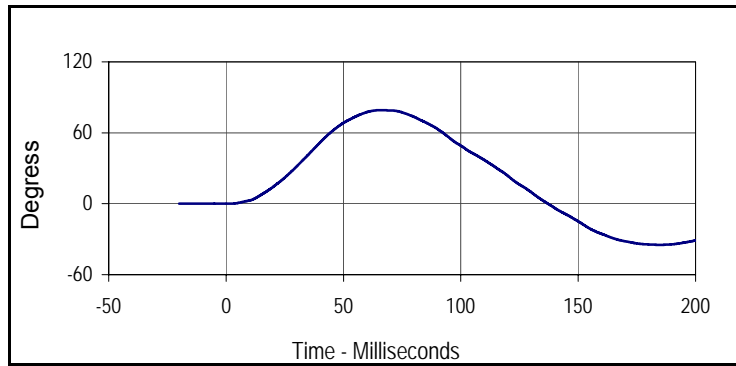

Curve Description			
Maximum Translation Rotation			
Plot No.	Type	SAE Class	Units
002	FIL	60	Degress
Max	Time	Min	Time
79.1	65.6	-34.7	184.8

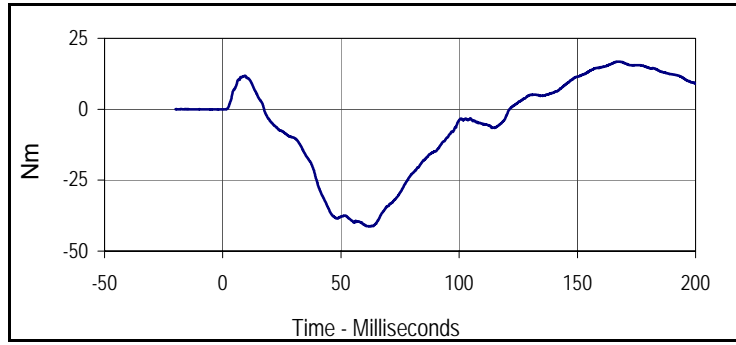


Curve Description			
Moment About Occipital Condyle			
Plot No.	Type	SAE Class	Units
003	FIL	600	Nm
Max	Time	Min	Time
16.8	167.2	-41.3	62.5

Test Program: SID IIs Shoulder Impact Test
 ATD Serial No.: 307


Test Date: 1/24/12
 Test I.D.: 307SH027




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥180	210	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	34.0	Pass
	Min		28.0	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.3	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	33.6	Pass
Impactor Velocity	m/s	4.20 to 4.40	4.33	Pass
Peak Shoulder Deflection	mm	28 to 37	28.0	Pass
Peak Lateral Spine Acceleration Y	G's	17 to 22	18.1	Pass
Peak Impactor Acceleration	G's	13 to 18	15.8	Pass
Overall Test Results			Pass	Pass

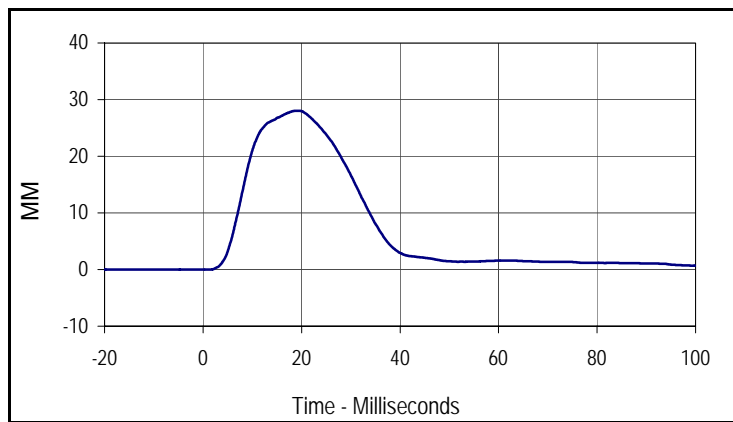

Curve Description			
Shoulder Deflection			
Plot No.	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
28.0	19.1	0.0	-5.8

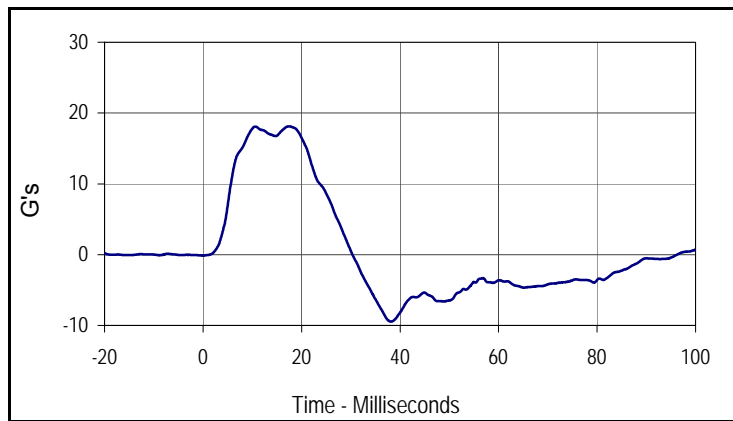

Curve Description			
Upper Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
002	FIL	180	G's
Max	Time	Min	Time
18.1	17.5	-9.4	38.1

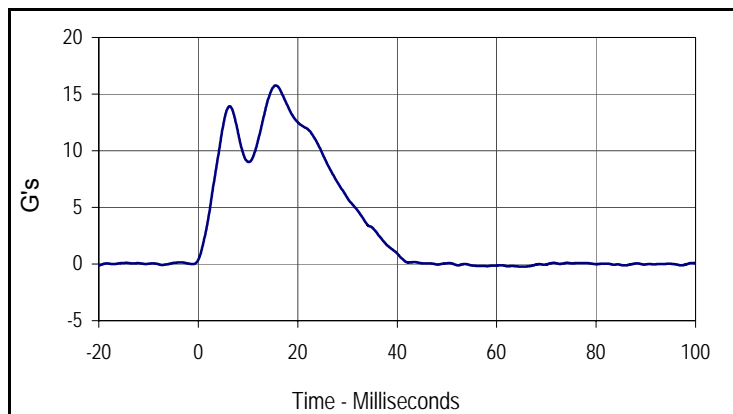


Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
15.8	15.6	-0.2	64.8

Test Program: SID IIs Thorax with Arm Impact Test
 ATD Serial No.: 307


Test Date: 1/24/12
 Test I.D.: 307TWA027




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥180	240	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	34.0	Pass
	Min		28.0	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.6	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	28.6	Pass
Impactor Velocity	m/s	6.6 to 6.8	6.7	Pass
Peak Shoulder Deflection	mm	31 to 40	36.4	Pass
Peak Upper Thorax Rib Deflection	mm	25 to 32	28.1	Pass
Peak Middle Thorax Rib Deflection	mm	30 to 36	31.1	Pass
Peak Lower Thorax Rib Deflection	mm	32 to 38	33.7	Pass
Peak Upper Spine Y Acceleration	G's	34 to 43	37.8	Pass
Peak Lower Spine Y Acceleration	G's	29 to 37	32.3	Pass
Peak Impactor Acceleration	G's	30 to 36	34.0	Pass
Overall Test Results				Pass

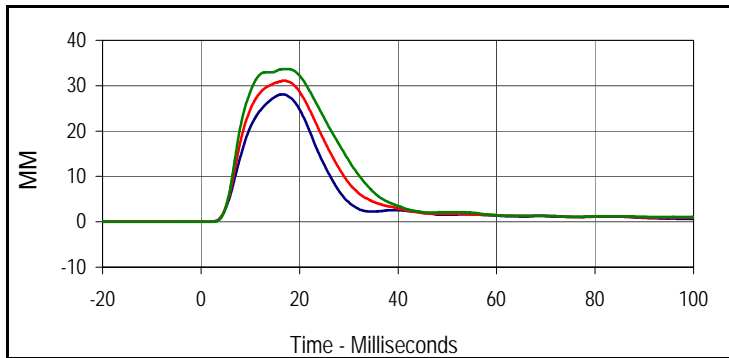

Curve Description			
Upper Thorax Deflection			
Plot No.	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
28.1	16.5	0.0	-8.8
Middle Thorax Deflection			
Max	Time	Min	Time
31.1	16.9	0.0	-15.7
Lower Thorax Deflection			
Max	Time	Min	Time
33.7	17.2	0.0	-10.7

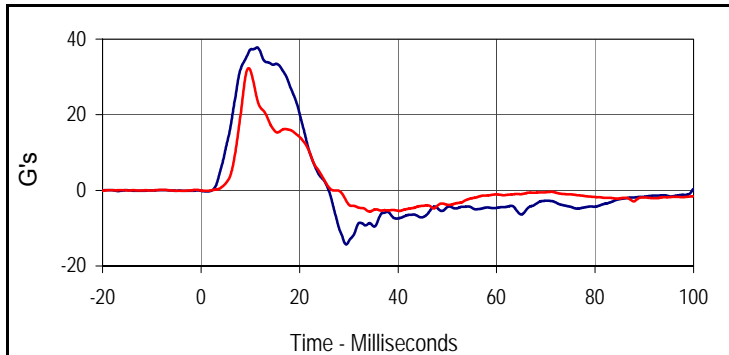


Curve Description			
Upper Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
004	FIL	180	G's
Max	Time	Min	Time
37.8	11.4	-14.3	29.5
Lower Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
005	FIL	180	G's
Max	Time	Min	Time
32.3	9.6	-5.6	34.2

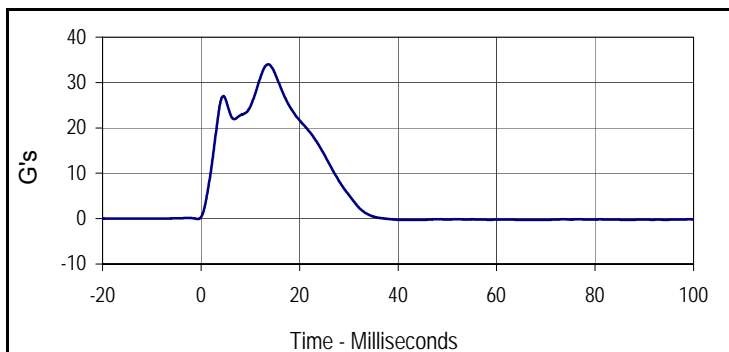

Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
006	FIL	180	G's
Max	Time	Min	Time
34.0	13.6	-0.3	40.8

Test Program: SID IIs Thorax with Arm Impact Test
ATD Serial No.: 307

Test Date: 1/24/12
Test I.D.: 307TWA027

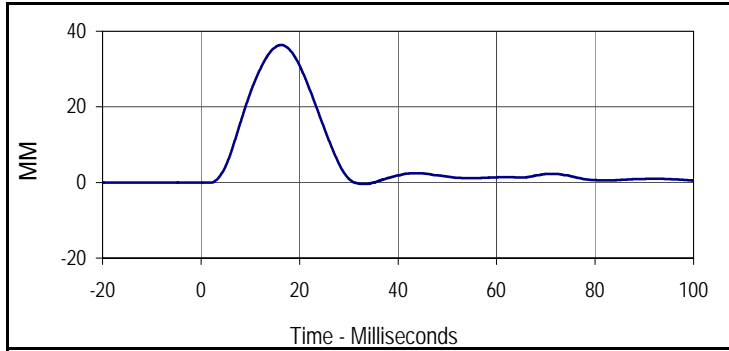


Curve Description			
Shoulder Deflection			
Plot No.	Type	SAE Class	Units
007	FIL	600	MM
Max	Time	Min	Time
36.4	16.3	-0.4	33.3

Test Program: SID IIs Thorax without Arm Impact Test
 ATD Serial No.: 307


Test Date: 1/24/12
 Test I.D.: 307TWOA027




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥180	260	Pass
Temperature During Soak	Max	18.9 to 25.6	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	34.0	Pass
	Min		28.0	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.3	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	29.2	Pass
Impactor Velocity	m/s	4.2 to 4.4	4.3	Pass
Peak Upper Thorax Rib Deflection	mm	32 to 40	33.3	Pass
Peak Middle Thorax Rib Deflection	mm	39 to 45	42.0	Pass
Peak Lower Thorax Rib Deflection	mm	35 to 43	37.2	Pass
Peak Upper Spine Y Acceleration	G's	13 to 17	14.4	Pass
Peak Lower Spine Y Acceleration	G's	7 to 11	9.3	Pass
Peak Impactor Acceleration	G's	14 to 18	15.4	Pass
Overall Test Results				Pass

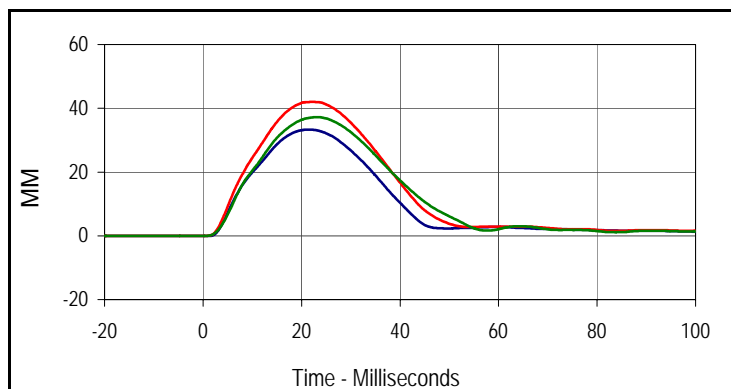

Curve Description			
Upper Thorax Deflection			
Plot No.	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
33.3	21.5	0.0	-12.8
Middle Thorax Deflection			
Max	Time	Min	Time
42.0	22.2	0.0	-18.7
Lower Thorax Deflection			
Max	Time	Min	Time
37.2	23.3	0.0	-10.8

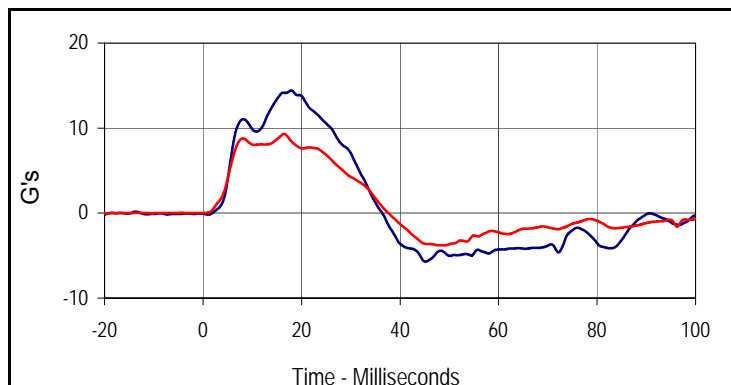

Curve Description			
Upper Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
004	FIL	180	G's
Max	Time	Min	Time
14.4	17.9	-5.7	45.2
Curve Description			
Lower Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
005	FIL	180	G's
Max	Time	Min	Time
9.3	16.4	-3.8	49.0

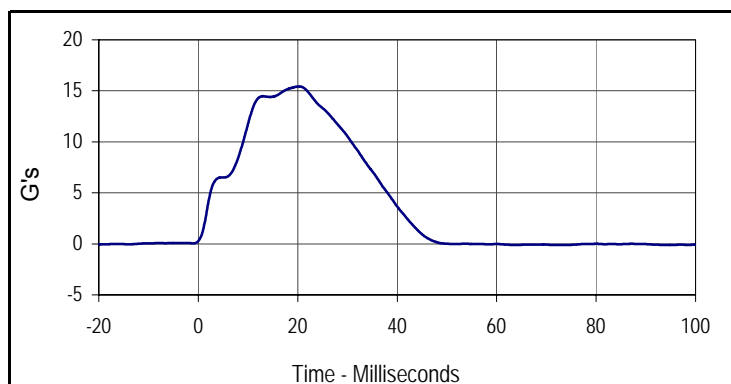


Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
006	FIL	180	G's
Max	Time	Min	Time
15.4	20.2	-0.1	94.1

Test Program: SID IIs Abdomen Impact Test
 ATD Serial No.: 307


Test Date: 1/24/12
 Test I.D.: 307ABD027




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥180	270	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	34.0	Pass
	Min		28.0	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.0	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	30.1	Pass
Impactor Velocity	m/s	4.2 to 4.4	4.3	Pass
Peak Upper Abdominal Rib Deflection	mm	36 to 47	41.8	Pass
Peak Lower Abdominal Rib Deflection	mm	33 to 44	36.6	Pass
Peak Lower Spine Y Acceleration	G's	9 to 14	11.8	Pass
Peak Impactor Acceleration	G's	12 to 16	15.3	Pass
Overall Test Results				Pass

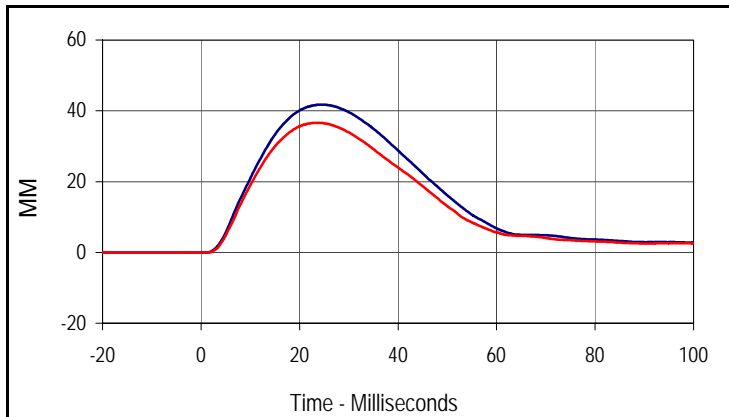

Curve Description			
Upper Abdominal Rib Deflection			
Plot No.	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
41.8	24.4	0.0	-13.8
Curve Description			
Lower Abdominal Rib Deflection			
Plot No.	Type	SAE Class	Units
002	FIL	600	MM
Max	Time	Min	Time
36.6	23.7	0.0	-3.0

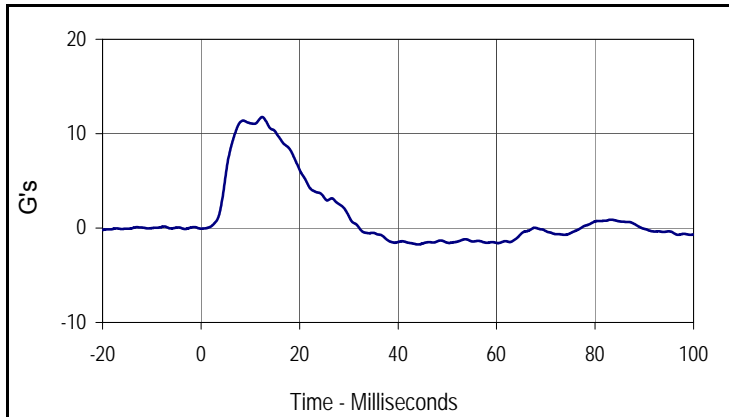


Curve Description			
Lower Spine Y Acceleration			
Plot No.	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
11.8	12.4	-1.7	44.2

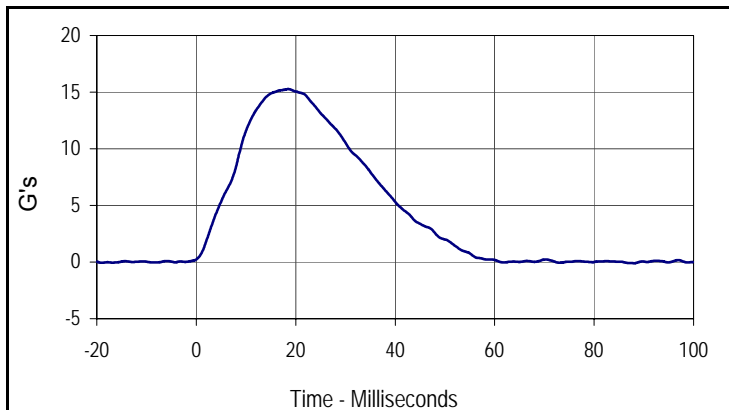

Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
004	FIL	180	G's
Max	Time	Min	Time
15.3	18.5	-0.1	88.1

MC5200 POST TEST

Resultant Data - SIDIIS Plug Compression

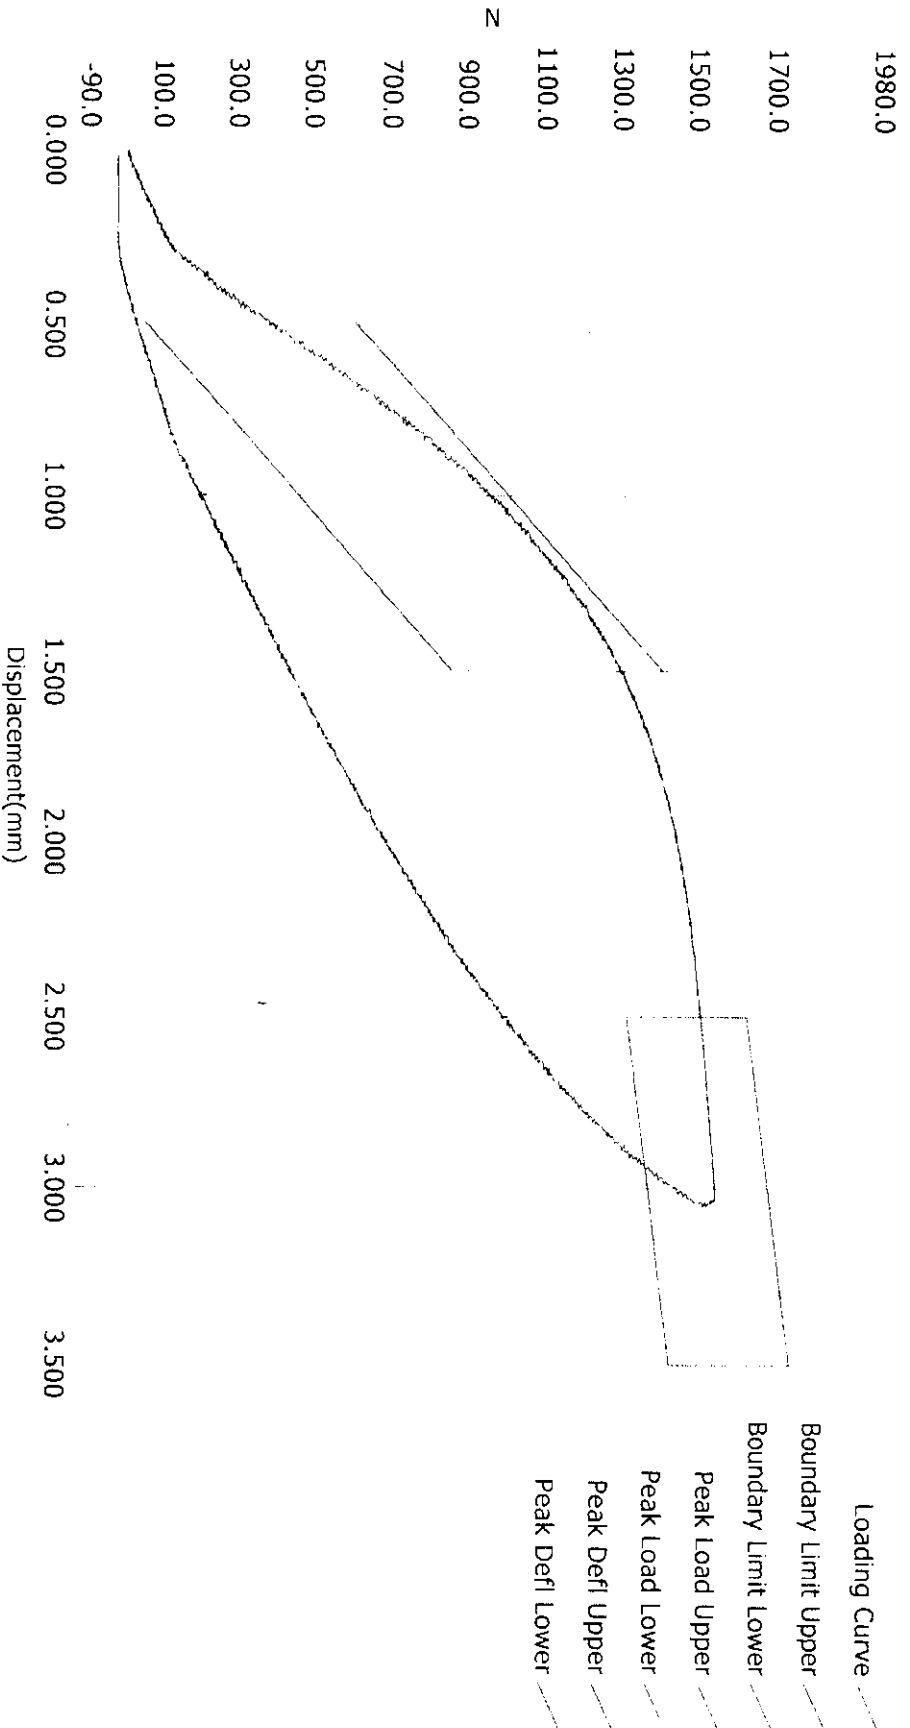

ATD Calibration Lab


<u>Test ID</u>	<u>Part Serial Number</u>	<u>Test Date</u>	<u>Test Time</u>
<u>Cert ID</u>	<u>ATD Serial Number</u>	<u>ATD Type</u>	
	36760	SIDIIS	
Current Date : 10/5/2010		Current Time : 17:24:43	

Test Program: SID IIs Pelvis Acetabulum Impact Test
 ATD Serial No.: 307


Test Date: 1/24/12
 Test I.D.: 307ACET027




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥180	300	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	34.0	Pass
	Min		28.0	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	20.9	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	31.5	Pass
Impactor Velocity	m/s	6.6 to 6.8	6.7	Pass
Peak Acetabulum Force Y	Newtons	3600 to 4300	3902.3	Pass
Peak Pelvis Y Acceleration After 6 msec.	G's	34 to 42	37.5	Pass
Peak Impactor Acceleration	G's	38 to 47	39.7	Pass
Overall Test Results				Pass

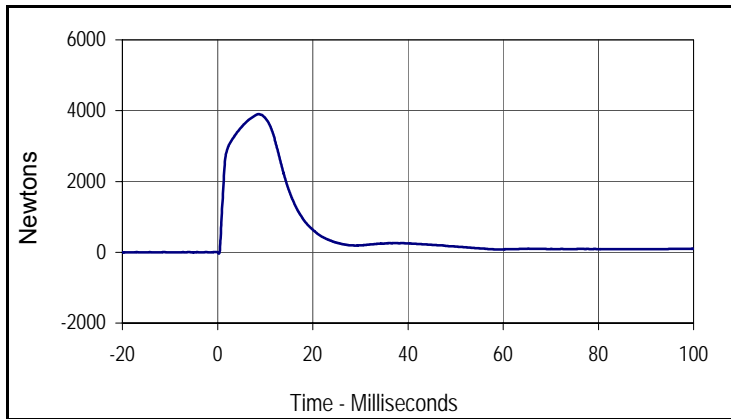

Curve Description			
Pelvis Acetabulum Force			
Plot No.	Type	SAE Class	Units
001	FIL	600	Newtons
Max	Time	Min	Time
3902.3	8.6	-34.0	0.3

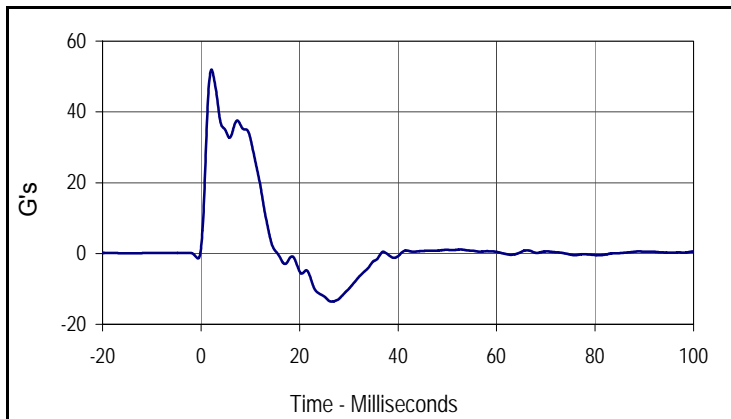

Curve Description			
Pelvis Y Acceleration			
Plot No.	Type	SAE Class	Units
002	FIL	180	G's
Max	Time	Min	Time
51.9	2.1	-13.6	26.5

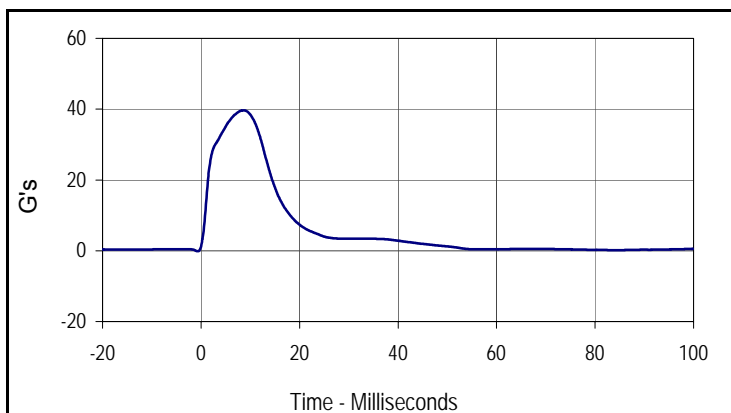


Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
39.7	8.7	-0.1	-0.7

Test Program: SID IIs Pelvis Iliac Calibration
 ATD Serial No.: 307


Test Date: 1/24/12
 Test I.D.: 307PL027




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥180	320	Pass
Temperature During Soak	Max	20.6 to 22.2	21.7	Pass
	Min		20.7	Pass
Humidity During Soak	Max	10.0 to 70.0	34.0	Pass
	Min		28.0	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.4	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	29.2	Pass
Impactor Velocity	m/s	4.2 to 4.4	4.2	Pass
Peak Iliac Force	Newtons	4100 to 5100	4420.6	Pass
Peak Pelvis Y Acceleration	G's	28 to 39	31.7	Pass
Peak Impactor Acceleration	G's	36 to 45	37.9	Pass
Overall Test Results				Pass

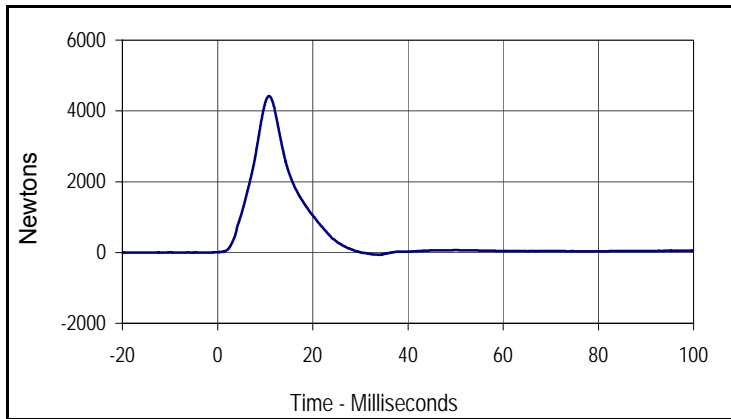

Curve Description			
Pelvis Iliac Force			
Plot No.	Type	SAE Class	Units
001	FIL	600	Newtons
Max	Time	Min	Time
4420.6	10.8	-63.2	34.1

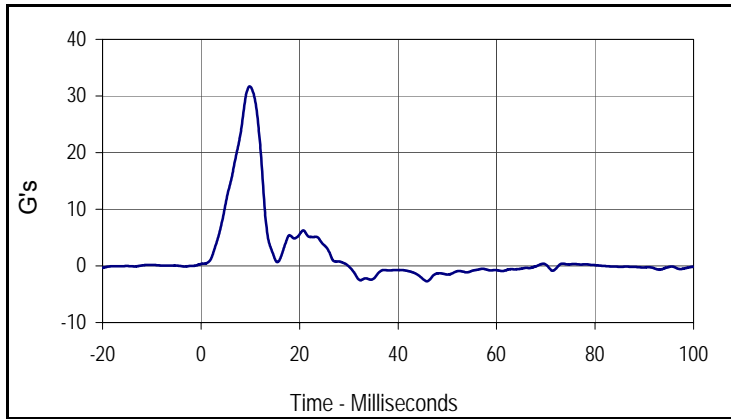

Curve Description			
Pelvis Y Acceleration			
Plot No.	Type	SAE Class	Units
002	FIL	180	G's
Max	Time	Min	Time
31.7	9.9	-2.7	45.9

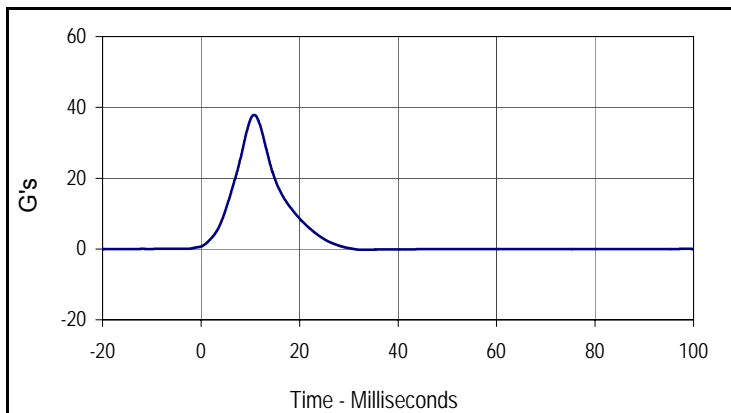

Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
37.9	10.8	-0.2	32.5

APPENDIX D
TEST EQUIPMENT AND INSTRUMENTATION CALIBRATION DATA

APPENDIX D
TEST EQUIPMENT AND INSTRUMENTATION CALIBRATION DATA

TABLE 1 – Dummy Instrumentation (ES-2re)

			ES-2re S/N F035		
			Serial Number	Manufacturer	Calibration
Head Accelerometers		X	P58760	Endevco	9/12/11
		Y	P58763	Endevco	9/12/11
		Z	P52093	Endevco	9/9/11
Thorax Rib Displacement Potentiometers		Upper	180	FTSS	7/20/11
		Middle	177	FTSS	7/20/11
		Lower	186	FTSS	7/20/11
Abdomen Load Cells		Forward	1514	Denton	7/22/11
		Middle	1510	Denton	7/22/11
		Rear	1515	Denton	7/22/11
Lower Spine Accelerometers (T12)		X	P49165	Endevco	9/12/11
		Y	P49212	Endevco	9/12/11
		Z	P52113	Endevco	9/12/11
Pubic Symphysis Load Cell		Y	506	Denton	7/22/11

TABLE 2 – Dummy Instrumentation (SID-IIs)

			SID-IIs S/N 307					
			Serial Number	Manufacturer	Calibration			
Head Accelerometers		X	P58900	Endevco	7/5/11			
		Y	P58902	Endevco	7/5/11			
		Z	P58983	Endevco	7/5/11			
Displacement Potentiometers		Shoulder		Y	1244	FTSS	7/1/11	
		Thoracic Rib		Upper	Y	1249	FTSS	7/1/11
				Middle	Y	1265	FTSS	7/1/11
				Lower	Y	1277	FTSS	7/1/11
		Abdominal Rib		Upper	Y	1286	FTSS	7/1/11
				Lower	Y	1290	FTSS	7/1/11
Lower Spine Accelerometers (T12)		X	P59007	Endevco	7/1/11			
		Y	P59015	Endevco	7/1/11			
		Z	P59016	Endevco	7/1/11			
Acetabulum Load Cell		Y	277	Denton	6/10/11			
Iliac Wing Load Cell		Y	289	Denton	6/10/11			
Pelvis Plug (Struck Side)			36687	FTSS	9/27/10			
Pelvis Plug (Non-Struck Side)			36736	FTSS	10/5/10			

TABLE 3 – Vehicle Instrumentation

Vehicle Instrumentation			Serial Number	Manufacturer	Calibration Date
1	Vehicle Center of Gravity	X	Ketx5a	ICSensor	6/20/11
	Vehicle Center of Gravity	Y	Ketx5b	ICSensor	6/20/11
	Vehicle Center of Gravity	Z	Ketx5c	ICSensor	6/20/11
2	Right Sill at Front Seat	X	Keva201X	ICSensor	11/28/11
	Right Sill at Front Seat	Y	Keva201Y	ICSensor	11/28/11
	Right Sill at Front Seat	Z	BF83H	Endevco	3/31/11
3	Right Sill at Rear Seat	X	Keva202X	ICSensor	11/28/11
	Right Sill at Rear Seat	Y	Keva202Y	ICSensor	11/28/11
	Right Sill at Rear Seat	Z	Keva202Z	ICSensor	11/28/11
4	Left Sill at Front Door	Y	EK16J	Endevco	2/3/11
5	Left Sill at Rear Door	Y	Keva508	ICSensor	8/2/11
6	Left A-Post Lower	Y	BE68J	Endevco	1/6/12
7	Left A-Post Middle	Y	J21776	Endevco	1/11/12
8	Left B-Post Lower	Y	J36641	Endevco	4/4/11
9	Left B-Post Middle	Y	BF59J	Endevco	4/29/11
10	Front Seat Track	Y	J21907	Endevco	3/30/11
11	Rear Seat Structure	Y	N/A	N/A	N/A
12	Right Rear Occ. Compartment	Y	Keva004	ICSensor	5/8/11
13	Engine Block	X	BI60H	Endevco	7/22/11
	Engine Block	Y	AR17	Endevco	7/22/11
14	Rear Floorpan Above Axle	X	Ketx12A	ICSensor	7/20/11
	Rear Floorpan Above Axle	Y	Ketx12Y	ICSensor	7/21/11
	Rear Floorpan Above Axle	Z	Ketx12Z	ICSensor	7/21/11

TABLE 4 – MDB Instrumentation

		Serial Number	Manufacturer	Calibration Date
MDB Center of Gravity	X	00L13-F37	Entrans	10/12/11
MDB Center of Gravity	Y	02I10-N16	Entrans	10/14/11
MDB Center of Gravity	Z	03J13_Z09	Entrans	10/14/11
Left Frame at Rear Axle Centerline	X	P58705	Endevco	10/12/11
Left Frame at Rear Axle Centerline	Y	05616-L03	Entrans	10/14/11