

REPORT NUMBER: NCAP305I-MGA-2012-013

**NEW CAR ASSESSMENT PROGRAM (NCAP)
FMVSS No. 305 Indicant Test**

**TOYOTA MOTOR CORPORATION
2012 Toyota Prius Plug-In Hybrid 5-Dr Hatchback
NHTSA No.: YC5103**

**MGA RESEARCH CORPORATION
5000 Warren Road
Burlington, WI 53105**



Test Date: June 18, 2012


Report Date: July 30, 2012

FINAL REPORT

**U.S. DEPARTMENT OF TRANSPORTATION
National Highway Traffic Safety Administration
Office of Crashworthiness Standards
Mail Code: NVS-111
1200 New Jersey Ave, SE
Room W43-410
Washington, DC 20590**

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof.

If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement.

Prepared by: 
Donna Janovicz, Project Manager

Approved by: 
Joe Fleck, Project Engineer

Approval Date: July 30, 2012

FINAL REPORT ACCEPTANCE BY OVSC:

Division Chief, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

COTR, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

Technical Report Documentation Page

<p>1. <i>Report No.</i> NCAP305I-MGA-2012-013</p>	<p>2. <i>Government Accession No.</i></p>	<p>3. <i>Recipient's Catalog No.</i></p>	
<p>4. <i>Title and Subtitle</i> Final Report of FMVSS 305 Compliance Testing of 2012 Toyota Prius Plug-In Hybrid 5-Dr Hatchback, NHTSA No.: YC5103</p>		<p>5. <i>Report Date</i> July 30, 2012</p>	
		<p>6. <i>Performing Organization Code</i> MGA</p>	
<p>7. <i>Author(s)</i> Donna Janovicz, Project Manager Joe Fleck, Project Engineer</p>		<p>8. <i>Performing Organization Report No.</i> NCAP305I-MGA-2012-013</p>	
<p>9. <i>Performing Organization Name and Address</i> MGA Research Corporation 5000 Warren Road Burlington, WI 53105</p>		<p>10. <i>Work Unit No.</i></p>	
		<p>11. <i>Contract or Grant No.</i> DTNH22-06-D-00028</p>	
<p>12. <i>Sponsoring Agency Name and Address</i> U.S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards (NVS-111) 1200 New Jersey Ave, SE, Room W43-410 Washington, D.C. 20590</p>		<p>13. <i>Type of Report and Period Covered</i> Final Test Report June 18 to July 30, 2012</p>	
		<p>14. <i>Sponsoring Agency Code</i> NVS-111</p>	
<p>15. <i>Supplementary Notes</i></p>			
<p>16. <i>Abstract</i></p> <p>An FMVSS No. 305 Indicant test, in conjunction with an NCAP frontal barrier impact test was conducted on the subject 2012 Toyota Prius Plug-In Hybrid 5-Dr Hatchback in accordance with the specifications of the applicable Office of Crashworthiness Standards Test Procedures for the generation of consumer information for the New Car Assessment Program (NCAP). No test failures were reported.</p>			
<p>17. <i>Key Words</i> New Car Assessment Program (NCAP) FMVSS 305 Indicant</p>		<p>18. <i>Distribution Statement</i> Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division, NPO-411 1200 New Jersey Ave, SE, Room E12-100 Washington, DC 20590 Email: tis@nhtsa.dot.gov FAX: 202-493-2833</p>	
<p>19. <i>Security Classification of Report</i> Unclassified</p>	<p>20. <i>Security Classification of Page</i> Unclassified</p>	<p>21. <i>No. of Pages</i> 44</p>	<p>22. <i>Price</i></p>

TABLE OF CONTENTS

<u>Section</u>		<u>Page No.</u>
1	Purpose of Test	1
2	Summary of Test Results	2
3	Data Sheets	3
 <u>Data Sheet</u>		 <u>Page No.</u>
1	Test Vehicle Specifications	4
2	Pre-Impact Data	6
3	Pre-Impact Electric Isolation Measurements and Calculations	7
4	Post-Impact Data	9
5	Static Rollover Test Data	11
 <u>Appendix</u>		
A	Photographs	A-1

SECTION 1 PURPOSE OF TEST

An FMVSS No. 305 Indicant test, in conjunction with an NCAP frontal barrier impact test was conducted on the subject 2012 Toyota Prius Plug-In Hybrid 5-Dr Hatchback.

The Indicant test was conducted in accordance with the Office of Crashworthiness Standards Laboratory Test Procedure, dated January 31, 2012 to determine compliance to the requirements of Federal Motor Vehicle Safety Standard (FMVSS) No. 305, "Electric-Powered Vehicles: Electrolyte Spillage and Electrical Shock Protection" for the purpose of providing consumer information.

This FMVSS No. 305 Indicant test is part of the FY12 New Car Assessment Program Test Program, sponsored by the National Highway Traffic Safety Administration (NHTSA), under contract DTNH22-06-D-00028.

SECTION 2 SUMMARY OF TEST RESULTS

A frontal barrier impact test was performed by MGA Research Corporation on a 2012 Toyota Prius Plug-In Hybrid 5-Dr Hatchback on June 18, 2012. Electrical isolation measurements were taken immediately post-impact and observations were made related to electrolyte spillage and battery retention. A static rollover was subsequently performed on the subject vehicle and electrical isolation measurements were taken at each stage of the rollover.

Based on the test results, the 2012 Toyota Prius Plug-In Hybrid 5-Dr Hatchback appears to meet the requirements for electrolyte spillage, electrical isolation, and battery retention during FMVSS No. 305 Indicant testing.

Data sheets, along with pre-test and post-test photographs of the test vehicle, are included in this report to document the test.

TEST NOTES

None

MGA does not endorse or certify products. The manufacturer's name appears solely for identification purposes.

**SECTION 3
DATA SHEETS**

**DATA SHEET NO. 1
TEST VEHICLE SPECIFICATIONS**

Test Vehicle: 2012 Toyota Prius Plug-In Hybrid 5-Dr Hatchback
 NHTSA No. YC5103

TEST VEHICLE INFORMATION

Year/Make/Model/Body Style	2012 Toyota Prius Plug-In Hybrid 5-Dr
NHTSA No.	YC5103
Color	Winter Gray Metallic
Odometer Reading	3 miles

DATA FROM CERTIFICATION LABEL

Manufactured By	TOYOTA MOTOR CORPORATION	GVWR (kg)	1842
Date of Manufacture	03/12	GAWR Front (kg)	1030
VIN:	JTDKN3DP5C3005930	GAWR Rear (kg)	987

ELECTRIC VEHICLE PROPULSION SYSTEM

Type of Electric Vehicle (Electric/Hybrid):	Gas-Electric Hybrid
Electric Energy Storage/Device:	Lithium-Ion (Li-Ion) Battery
Nominal Voltage (V):	207.2 V
Is this vehicle equipped with an Automatic Propulsion Battery Disconnect?	Yes
Physical Location of the Automatic Propulsion Battery Disconnect:	Inside of Battery Pack
Auxiliary Battery Type:	Lead-Acid Battery

ELECTRIC ENERGY STORAGE CONVERSION/DEVICE SYSTEM DATA (COTR SUPPLIED)

Electrolyte Fluid Type:	Organic Electrolyte
Electrolyte Fluid Specific Gravity:	1.225g/cm ³
Electrolyte Kinematic Viscosity (centistokes):	3.4 mPa·s@25° C
Electrolyte Fluid Color:	Clear
Electric Energy Storage/Conversion System Coolant Type, Color, Specific Gravity (if applicable):	None (Air Cooled System)
Location of Battery Modules:	<input checked="" type="checkbox"/> Inside Passenger Compartment
	<input type="checkbox"/> Outside Passenger Compartment
	Rear Cargo Area

**DATA SHEET NO. 1
TEST VEHICLE SPECIFICATIONS**

Test Vehicle: 2012 Toyota Prius Plug-In Hybrid 5-Dr Hatchback
 NHTSA No. YC5103

ELECTRIC ENERGY STORAGE CONVERSION/DEVICE STATE OF CHARGE

<i>For all battery types:</i>	
Voltage range corresponding to useable energy of the battery:	
Minimum State of Charge:	168.0 V
Maximum State of Charge:	229.6 V
95% of Maximum State of Charge:	218.1 V
Test Voltage - No less than 95% of maximum State of Charge:	219.4 V
<i>For batteries that are rechargeable ONLY by an energy source on the vehicle:</i>	
Voltage range corresponding to useable energy of the battery:	
Minimum State of Charge:	
Maximum State of Charge:	
Test Voltage – Maximum practicable State of Charge within Normal Operating Range:	

**DATA SHEET 2
PRE-IMPACT DATA**

Test Vehicle: 2012 Toyota Prius Plug-In Hybrid 5-Dr Hatchback
NHTSA No. YC5103

VEHICLE CHASSIS GROUND POINT(S) LOCATION(S)

Details of Vehicle Chassis Ground Point(s) & Location(s)	Ground stud located at right front corner of HV battery pack.
--	---

ELECTRIC ENERGY STORAGE/CONVERSION TEST POINTS

Details of Electric Energy Storage/Conversion System Test Points:	On the front side of the HV battery pack, which is located under the access panel, the test points are located on the traction side of the contactor.
---	---

**DATA SHEET 3
PRE-IMPACT ELECTRIC ISOLATION MEASUREMENTS & CALCULATIONS**

Test Vehicle: 2012 Toyota Prius Plug-In Hybrid 5-Dr Hatchback
 NHTSA No. YC5103

VOLTMETER INFORMATION

Make:	Fluke
Model:	11
Serial Number:	68541895
Internal Impedance Value (MΩ):	> 10 MΩ < 100 pF
Resolution (V):	.001 Volts
Last Calibration Date:	01/23/2012

ELECTRIC ENERGY STORAGE/CONVERSION SYSTEM VOLTAGE

Measurement shall be made with Energy Storage/Conversion System connected to the vehicle propulsion system, and the vehicle in the “ready-to-drive” (propulsion system energized) position.

If voltage measurement is not at the voltage or within the normal operating voltage range specified by the manufacturer, the battery must be charged.

Vb (V):	219.4
---------	-------

ELECTRIC ENERGY STORAGE/CONVERSION SYSTEM TO VEHICLE CHASSIS

Vehicle chassis point(s) determined and supplied to contractor by COTR.

V1 (V):	110.6
V2 (V):	106.7

**ELECTRIC ENERGY STORAGE/CONVERSION SYSTEM TO
VEHICLE CHASSIS ACROSS RESISTOR**

The known resistance Ro (in ohms) should be approximately 500 times the normal operating voltage of the vehicle (in volts) per SAE J1766.

Ro (Ω):	105100
---------	--------

V1' (V) Pre-Impact:	6.10
V2' (V) Pre-Impact:	6.17

DATA SHEET 3 (CONTINUED)
PRE-IMPACT ELECTRICAL ISOLATION MEASUREMENTS & CALCULATIONS

Test Vehicle: 2012 Toyota Prius Plug-In Hybrid 5-Dr Hatchback
 NHTSA No. YC5103

ELECTRICAL ISOLATION MEASUREMENT

Note: If measured voltage is zero and results in a division by zero, record "Zero Volts". This "zero voltage" condition is considered as being compliant.

V1' (V):	6.10
$R_{i1} = R_o (1 + V_2/V_1) [(V_1 - V_1')/V_1']$	
Ri1 (Ω):	3537478
V2' (V):	6.17
$R_{i2} = R_o (1 + V_1/V_2) [(V_2 - V_2')/V_2']$	
Ri2 (Ω):	3487454
Ri = The lesser of Ri1 and Ri2	
Ri Pre-Test ((Ω):	3487454
Ri/Vb (Ω/V):	15895
Minimum Electrical Isolation Value is 500 Ω/V	

Is the measured Electrical Isolation Value:	Yes, Pass	No, Fail
≥500 Ω/V without electrical isolation monitoring	X	
≥100 Ω/V with electrical isolation monitoring		

**DATA SHEET 4
POST-IMPACT DATA**

Test Vehicle: 2012 Toyota Prius Plug-In Hybrid 5-Dr Hatchback
 NHTSA No. YC5103

VOLTMETER INFORMATION

Make:	Fluke
Model:	11
Serial Number:	68541895
Internal Impedance Value (MΩ):	> 10 MΩ < 100 pF
Nominal Propulsion Battery Voltage (Vb) (V):	219.4

**ELECTRIC ENERGY STORAGE/CONVERSION SYSTEM
VOLTAGE LOCATION OF MEASUREMENT**

Measurement is made from the side of the automatic disconnect connected to the electric powertrain.

Vb (V):	70.0
---------	------

ELECTRIC ENERGY STORAGE/CONVERSION SYSTEM VOLTAGE

V1 =	0.0	V	Impact Time:	1	Minutes	50	s
V2 =	58.0	V	Impact Time:	1	Minutes	00	s
V1' =	0.0	V	Impact Time:	1	Minutes	12	s
V2' =	35.0	V	Impact Time:	1	Minutes	21	s

ELECTRICAL ISOLATION MEASUREMENT

Note: If measured voltage is zero and results in a division by zero, record "Zero Volts". This "zero voltage" condition is considered as being compliant.

$R_{i1} = R_o (1 + V_2/V_1) [(V_1 - V_1')/V_1']$							
Ri1 =	Zero Volts	Ω	Impact Time:	1	Minutes	12	s
$R_{i2} = R_o (1 + V_1/V_2) [(V_2 - V_2')/V_2']$							
Ri2 =	Zero Volts	Ω	Impact Time:	1	Minutes	21	s
Ri = The lesser of Ri1 and Ri2							
Ri =	Zero Volts	Ω	Impact Time:	1	Minutes	12	s
Ri/Vb = electrical Isolation Value/Nominal Battery Voltage							
Minimum Electrical Value is 500 Ω/V							
Ri/Vb =	Zero Volts	Ω/V	Impact Time:	1	Minutes	12	s

Is the measured Electrical Isolation Value:	Yes, Pass	No, Fail
≥500 Ω/V without electrical isolation monitoring	X	
≥100 Ω/V with electrical isolation monitoring		

This "zero voltage" condition is considered as being compliant.

**DATA SHEET 4 (CONTINUED)
POST-IMPACT DATA**

Test Vehicle: 2012 Toyota Prius Plug-In Hybrid 5-Dr Hatchback
 NHTSA No. YC5103

ELECTRIC ENERGY STORAGE/CONVERSION DEVICE

	Inside Passenger Compartment	Outside Passenger Compartment
Location of Electric Energy Storage/Conversion Device:	X	

	Yes, Pass	No, Fail
All Components of Electrical Energy Storage/Conversion Device remained attached to the vehicle with at least one mounting location.	X	

Describe Electric Energy Storage/Conversion Device movement within the passenger compartment [Supply photographs as appropriate]:
Not Applicable

	Yes, Fail	No, Pass
Has the Electric Energy Storage/Conversion Device moved within the passenger compartment?		X


Describe intrusion of an outside Electric Energy Storage/Conversion Device into the passenger compartment [Supply photographs as appropriate]:
No Intrusion

	Yes, Fail	No, Pass
Has an outside Electric Energy Storage/Conversion Device intruded into the passenger compartment?		X

	Yes, Fail	No, Pass
Is Electric Energy Storage/Conversion Device electrolyte spillage visible in the passenger compartment?		X

**DATA SHEET 5
STATIC ROLLOVER TEST DATA**

Test Vehicle: 2012 Toyota Prius Plug-In Hybrid 5-Dr Hatchback
 NHTSA No. YC5103

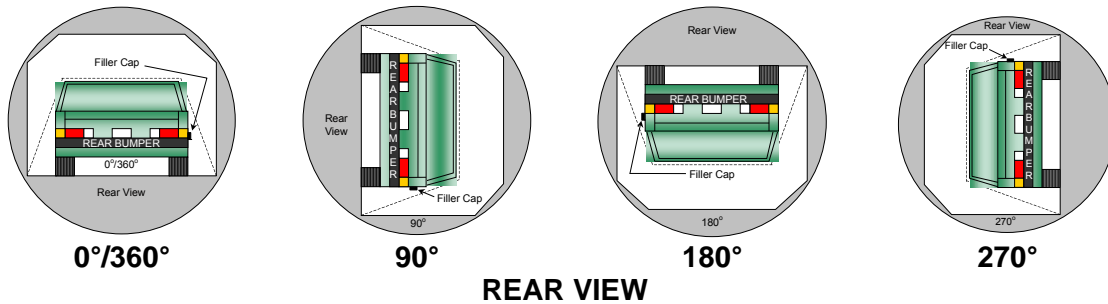

**DETERMINATION OF ELECTRIC ENERGY STORAGE/CONVERSION DEVICE
ELECTROLYTE COLLECTION TIME PERIOD**

Rollover Stage	Rotation Time (spec. 1-3 min)				FMVSS 301 Hold Time		Total Time				Next Whole Minute Interval	
0° - 90°	2	minutes	51	seconds	5	minutes	7	minutes	51	seconds	8	minutes
90° - 180°	2	minutes	30	seconds	5	minutes	7	minutes	30	seconds	8	minutes
180° - 270°	2	Minutes	18	seconds	5	minutes	7	minutes	18	seconds	8	minutes
270° - 360°	2	minutes	33	seconds	5	minutes	7	minutes	33	seconds	8	minutes

**ACTUAL TEST VEHICLE ELECTRIC ENERGY STORAGE/CONVERSION DEVICE
ELECTROLYTE SPILLAGE**

Rollover Stage	Electric Energy Storage/Conversion Device Electrolyte Spillage (L)	Spillage Location
0° to 90°	0	Not Applicable
90° to 180°	0	Not Applicable
180° to 270°	0	Not Applicable
270° to 360°	0	Not Applicable

Total Spillage: 0 L

	Yes, Fail	No, Pass
Is the total spillage of Electric Energy Storage/Conversion Device electrolyte greater than 5.0 Liters?		X
Is Electric Energy Storage/Conversion Device electrolyte spillage visible in the passenger compartment?		X

**DATA SHEET 5 (CONTINUED)
STATIC ROLLOVER TEST DATA**

Test Vehicle: 2012 Toyota Prius Plug-In Hybrid 5-Dr Hatchback
NHTSA No. YC5103

VOLTMETER INFORMATION

Make:	Fluke
Model:	11
Serial Number:	68541895
Internal Impedance Value (MΩ):	> 10 MΩ < 100 pF
Nominal Electric Energy Storage/Conversion Device Voltage (Vb) (V):	219.4
Record V1, V2, V1', V2' voltage measurements at the start of each successive increment of 90°, 180°, 270°, and 360° of the static rollover test.	

ELECTRICAL ISOLATION MEASUREMENT

V1 =	0.0	V	0°	Time:		Minutes		s
V1 =	0.0	V	90°	Time:	3	Minutes	9	s
V1 =	0.0	V	180°	Time:	3	Minutes	0	s
V1 =	0.0	V	270°	Time:	3	Minutes	30	s
V1 =	0.0	V	360°	Time:	3	Minutes	52	s
V2 =	0.03	V	0°	Time:		Minutes		s
V2 =	0.03	V	90°	Time:	3	Minutes	15	s
V2 =	0.01	V	180°	Time:	3	Minutes	10	s
V2 =	0.03	V	270°	Time:	3	Minutes	40	s
V2 =	0.03	V	360°	Time:	2	Minutes	58	s
V1' =	0.0	V	0°	Time:		Minutes		s
V1' =	0.0	V	90°	Time:	3	Minutes	48	s
V1' =	0.0	V	180°	Time:	3	Minutes	45	s
V1' =	0.0	V	270°	Time:	3	Minutes	56	s
V1' =	0.0	V	360°	Time:	3	Minutes	6	s
V2' =	0.03	V	0°	Time:		Minutes		s
V2' =	0.02	V	90°	Time:	3	Minutes	29	s
V2' =	0.01	V	180°	Time:	3	Minutes	30	s
V2' =	0.03	V	270°	Time:	3	Minutes	51	s
V2' =	0.03	V	360°	Time:	3	Minutes	12	s
Vb =	0.03	V	0°	Time:		Minutes		s
Vb =	0.03	V	90°	Time:	3	Minutes	0	s
Vb =	0.01	V	180°	Time:	3	Minutes	49	s
Vb =	0.03	V	270°	Time:	3	Minutes	21	s
Vb =	0.03	V	360°	Time:	2	Minutes	47	s

**DATA SHEET 5 (CONTINUED)
STATIC ROLLOVER TEST DATA**

Test Vehicle: 2012 Toyota Prius Plug-In Hybrid 5-Dr Hatchback
NHTSA No. YC5103

ELECTRICAL ISOLATION CALCULATION

Note: If measured voltage is zero and results in a division by zero, record "Zero Volts". This "zero voltage" condition is considered as being compliant.

$R_{i1} = R_o (1 + V_2/V_1) [(V_1 - V_1')/V_1']$								
Ri1 =	Zero Volts	Ω	0°	Time:		Minutes		s
Ri1 =	Zero Volts	Ω	90°	Time:	3	Minutes	48	s
Ri1 =	Zero Volts	Ω	180°	Time:	3	Minutes	45	s
Ri1 =	Zero Volts	Ω	270°	Time:	3	Minutes	56	s
Ri1 =	Zero Volts	Ω	360°	Time:	3	Minutes	6	s
$R_{i2} = R_o (1 + V_1/V_2) [(V_2 - V_2')/V_2']$								
Ri2 =	Zero Volts	Ω	0°	Time:		Minutes		s
Ri2 =	Zero Volts	Ω	90°	Time:	3	Minutes	29	s
Ri2 =	Zero Volts	Ω	180°	Time:	3	Minutes	30	s
Ri2 =	Zero Volts	Ω	270°	Time:	3	Minutes	51	s
Ri2 =	Zero Volts	Ω	360°	Time:	3	Minutes	12	s
Ri = The lesser of Ri1 and Ri2								
Ri =	Zero Volts	Ω	0°	Time:		Minutes		s
Ri =	Zero Volts	Ω	90°	Time:	3	Minutes	29	s
Ri =	Zero Volts	Ω	180°	Time:	3	Minutes	30	s
Ri =	Zero Volts	Ω	270°	Time:	3	Minutes	51	s
Ri =	Zero Volts	Ω	360°	Time:	3	Minutes	6	s
Ri/Vb = Electrical Isolation Value/Nominal Battery Voltage Minimum Electrical Isolation Value is 500 Ω/V								
Ri/Vb =	Zero Volts	Ω/V	0°	Time:		Minutes		s
Ri/Vb =	Zero Volts	Ω/V	90°	Time:	3	Minutes	29	s
Ri/Vb =	Zero Volts	Ω/V	180°	Time:	3	Minutes	30	s
Ri/Vb =	Zero Volts	Ω/V	270°	Time:	3	Minutes	51	s
Ri/Vb =	Zero Volts	Ω/V	360°	Time:	3	Minutes	6	s

Is the measured Electrical Isolation Value:	Yes, Pass	No, Fail
≥500 Ω/V without electrical isolation monitoring	X	
≥100 Ω/V with electrical isolation monitoring		

This "zero voltage" condition is considered as being compliant.

**APPENDIX A
PHOTOGRAPHS**

TABLE OF PHOTOGRAPHS

	<u>Page No.</u>
Auxiliary Power Module Warning Label	A-1
Power Inverter Warning Label	A-1
First Responder Warning Label	A-2
First Responder Warning Location	A-2
Other Vehicle Label(s) Related to Electrical Propulsion System	A-3
Other Vehicle Label(s) Related to Electrical Propulsion System	A-3
Other Vehicle Label(s) Related to Electrical Propulsion System	A-4
Other Vehicle Label(s) Related to Electrical Propulsion System	A-4
Other Vehicle Label(s) Related to Electrical Propulsion System	A-5
Manual High Voltage Service Disconnect in Place	A-5
Manual High Voltage Service Disconnect Removed	A-6
Manual High Voltage Service Disconnect Removed	A-6
Pre-Impact View of Propulsion Battery	A-7
Post-Impact Front View of Propulsion Battery	A-7
Post-Impact Rear View of Propulsion Battery	A-8
Pre-Impact View of Battery Box(s) or Container(s) Which Holds Individual Battery Modules	A-8
Post-Impact View of Battery Box(s) or Container(s) Which Holds Individual Battery Modules	A-9
Pre-Impact View of Propulsion Battery Module(s)	A-9
Post-Impact View of Propulsion Battery Module(s)	A-10
Pre-Impact View of Electric Propulsion Drive	A-10
Post-Impact View of Electric Propulsion Drive	A-11
Pre-Impact View of High Voltage Interconnect(s)	A-11
Pre-Impact View Propulsion Battery Venting System(s)	A-12
Pre-Impact View Propulsion Battery Venting System(s)	A-12
Pre-Impact View of Other Visible Electric Propulsion Components	A-13
Pre-Impact View of Ground Lead Attached	A-13
Pre-Impact View of High Voltage Leads Attached	A-14
Pre-Impact Close-Up View of High Voltage Leads Attached	A-14
Pre-Impact View of Installed Impact Interface Port	A-15
Post-Impact View of Installed Impact Interface Port	A-15
Pre-Impact View of Other Test Devices	A-16
Post-Impact View of Other Test Devices	A-16

	<u>Page No.</u>
FMVSS No. 305 Static Rollover at 90°	A-17
FMVSS No. 305 Static Rollover at 180°	A-17
FMVSS No. 305 Static Rollover at 270°	A-18
FMVSS No. 305 Static Rollover at 360°	A-18
Pre-Impact View of the Vehicle Passenger Compartment Adjacent to Propulsion Battery	A-19
Post-Impact View of the Vehicle Passenger Compartment Adjacent to Propulsion Battery	A-19
Post-Impact Propulsion Battery System Mounting and/or Intrusion Failure(s)	A-20
Post-Impact View of Battery Component Intrusion	A-20
Post-Impact View of Battery Module Movement or Retention Loss	A-21
Post-Impact View of Propulsion Battery Electrolyte Spillage Location	A-21
Post-Test View of Propulsion Battery Electrolyte Spillage Location	A-22
As Delivered Right Front $\frac{3}{4}$ View of Impact Vehicle	A-22
As Delivered Left Rear $\frac{3}{4}$ View of Impact Vehicle	A-23
Vehicle's Certification Label	A-23
Reduced Load Carrying Capacity Label	A-24
Vehicle's Tire Information Placard or Label	A-24

PHOTOGRAPH NOT APPLICABLE

No. 001 Auxiliary Power Module Warning Label

PHOTOGRAPH NOT APPLICABLE

No. 002 Power Inverter Warning Label

PHOTOGRAPH NOT APPLICABLE

No. 003 First Responder Warning Label

PHOTOGRAPH NOT APPLICABLE


No. 004 First Responder Warning Location



No. 005 Other Vehicle Label(s) Related to Electrical Propulsion System



No. 005a Other Vehicle Label(s) Related to Electrical Propulsion System

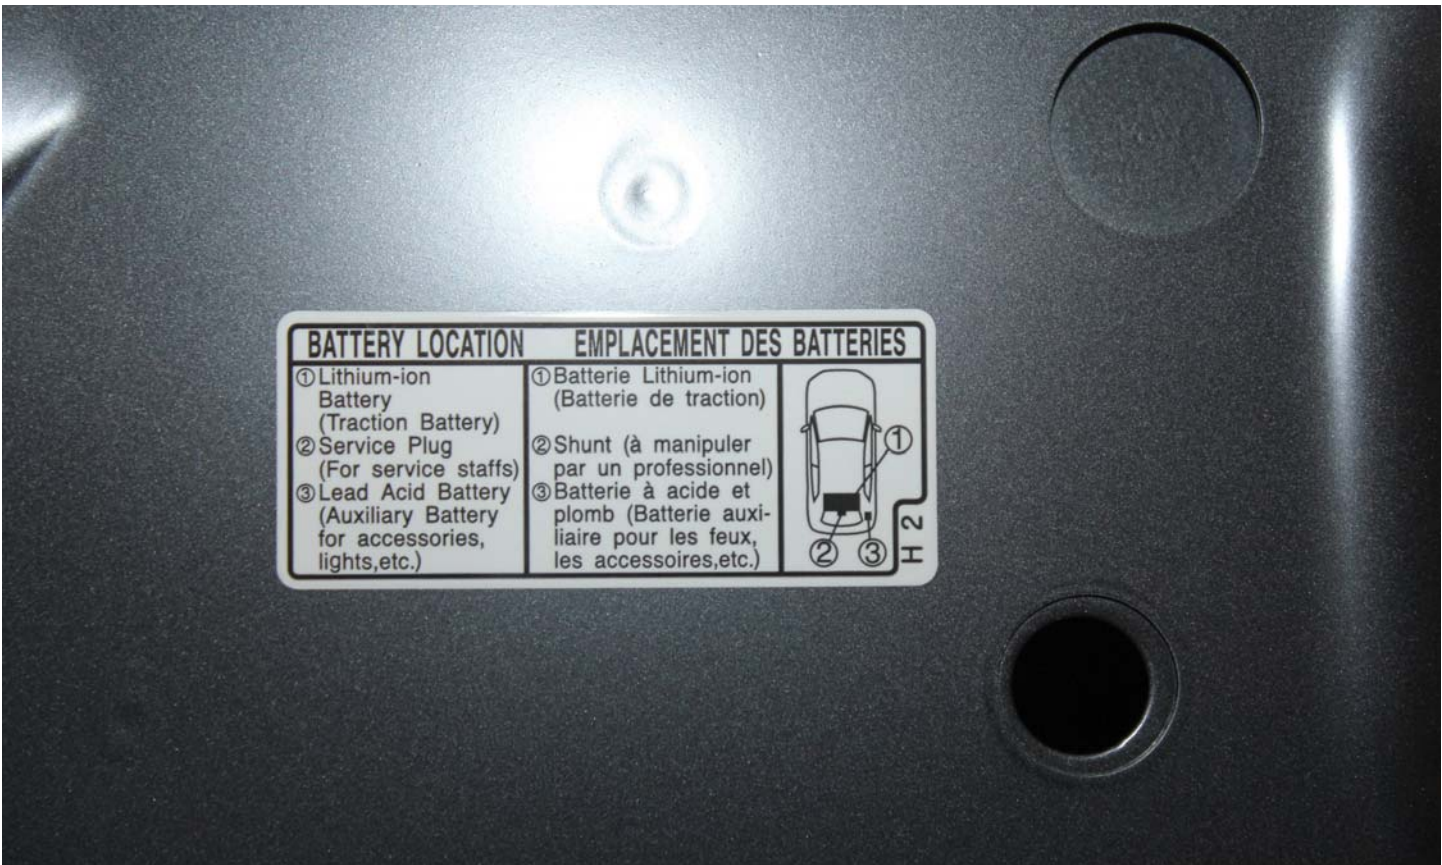

No. 005b Other Vehicle Label(s) Related to Electrical Propulsion System



No. 005c Other Vehicle Label(s) Related to Electrical Propulsion System




No. 005d Other Vehicle Label(s) Related to Electrical Propulsion System



No. 006 Manual High Voltage Service Disconnect in Place



No. 007 Manual High Voltage Service Disconnect Removed

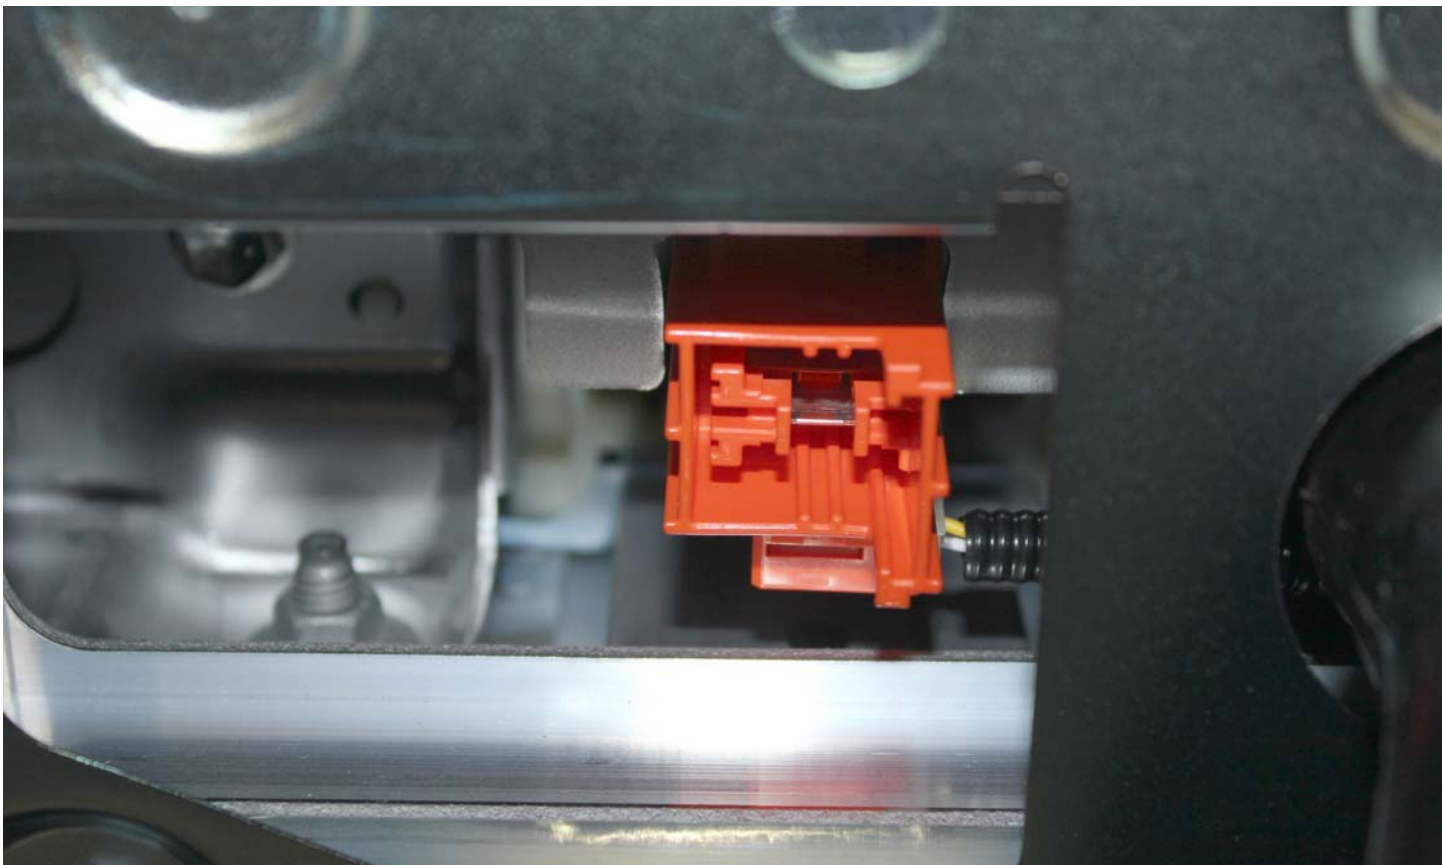

No. 008 Manual High Voltage Service Disconnect Removed



No. 009 Pre-Impact View of Propulsion Battery



No. 010 Post-Impact Front View of Propulsion Battery



No. 011 Post-Impact Rear View of Propulsion Battery



No. 012 Pre-Impact View of Battery Box(s) or Container(s) Which Holds Individual Battery Modules



No. 013 Post-Impact View of Battery Box(s) or Container(s) Which Holds Individual Battery Modules

PHOTOGRAPH NOT APPLICABLE

No. 014 Pre-Impact View of Propulsion Battery Module(s)

PHOTOGRAPH NOT APPLICABLE

No. 015 Post-Impact View of Propulsion Battery Module(s)



No. 016 Pre-Impact View of Electric Propulsion Drive



No. 017 Post-Impact View of Electric Propulsion Drive



No. 018 Pre-Impact View of High Voltage Interconnect(s)




No. 019 Pre-Impact View Propulsion Battery Venting System(s)




No. 019a Pre-Impact View Propulsion Battery Venting System(s)

PHOTOGRAPH NOT APPLICABLE


No. 020 Pre-Impact View of Other Visible Electric Propulsion Components

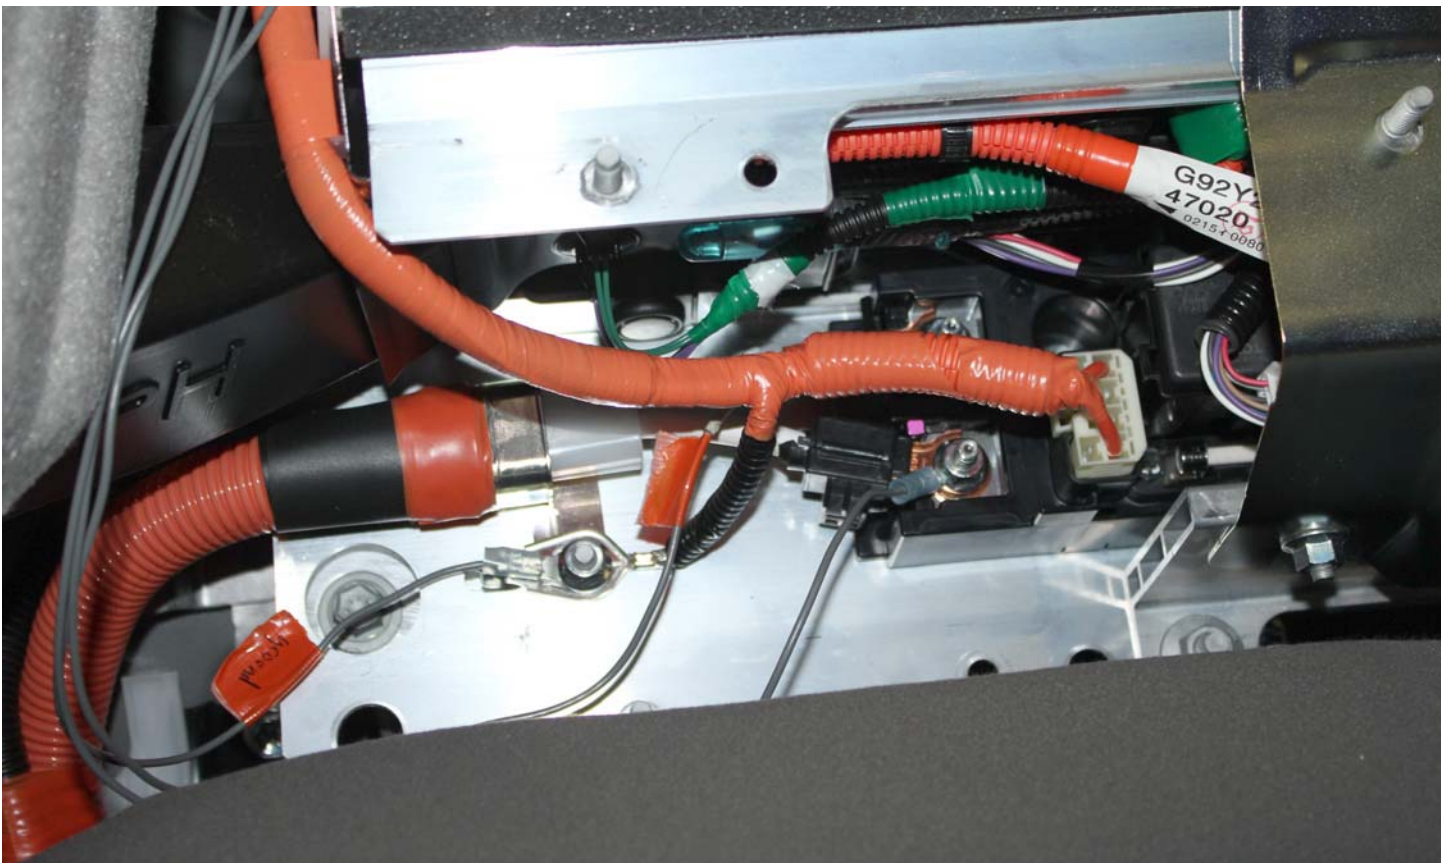

No. 021 Pre-Impact View of Ground Lead Attached

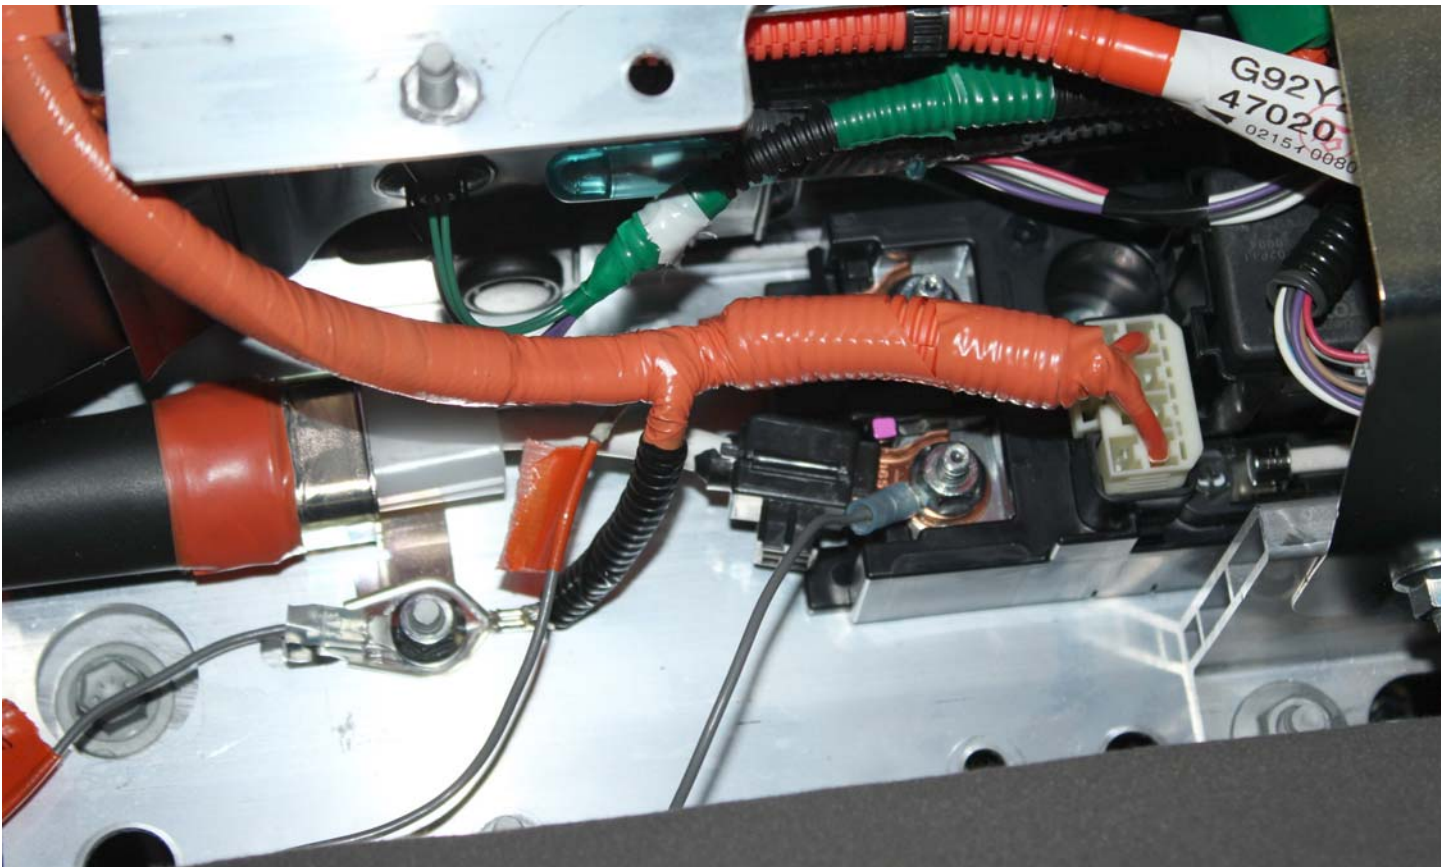


No. 022 Pre-Impact View of High Voltage Leads Attached

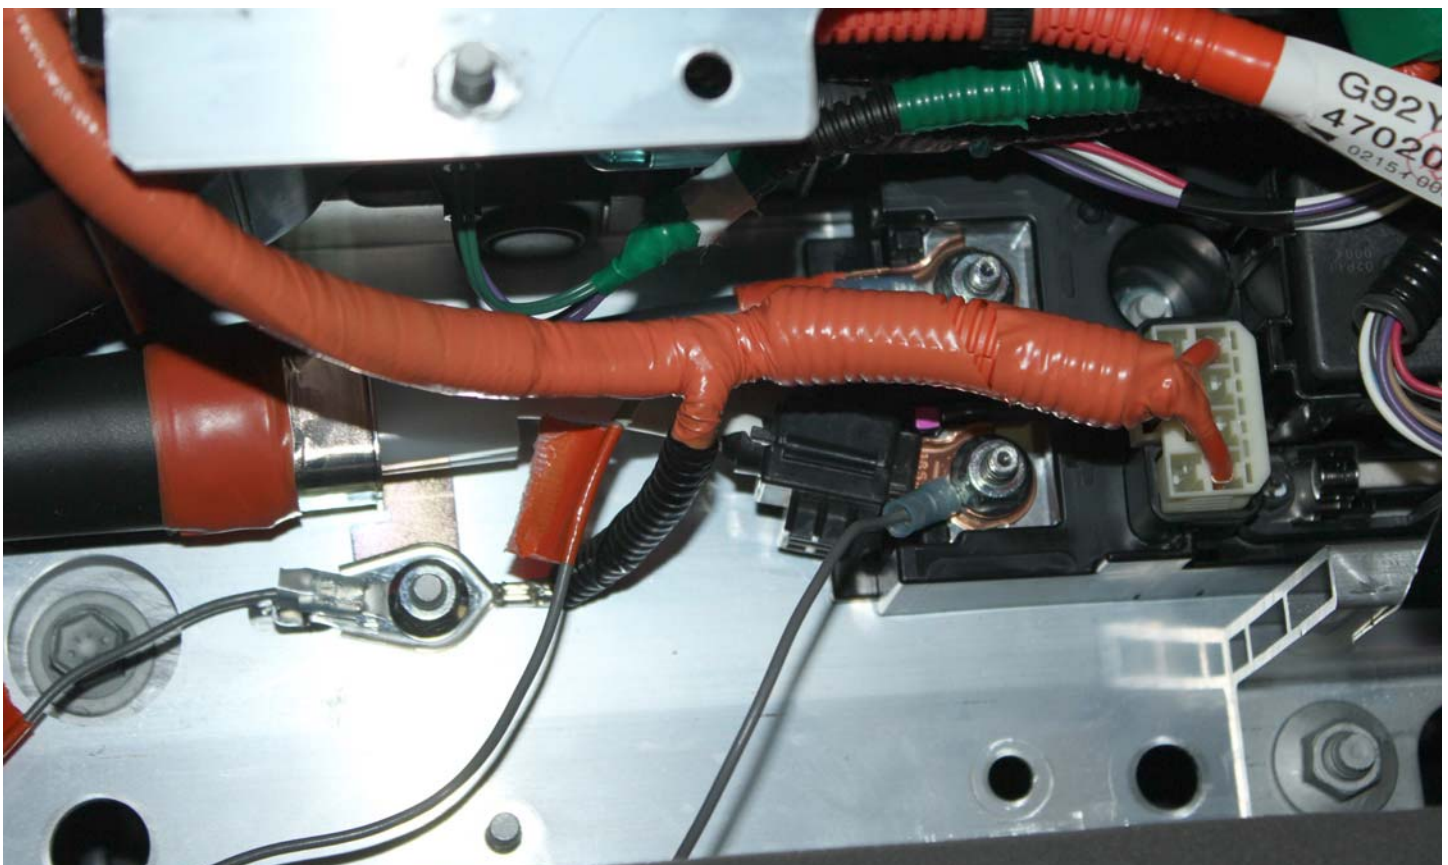

No. 023 Pre-Impact Close-Up View of High Voltage Leads Attached

PHOTOGRAPH NOT AVAILABLE

No. 024 Pre-Impact View of Installed Impact Interface Port

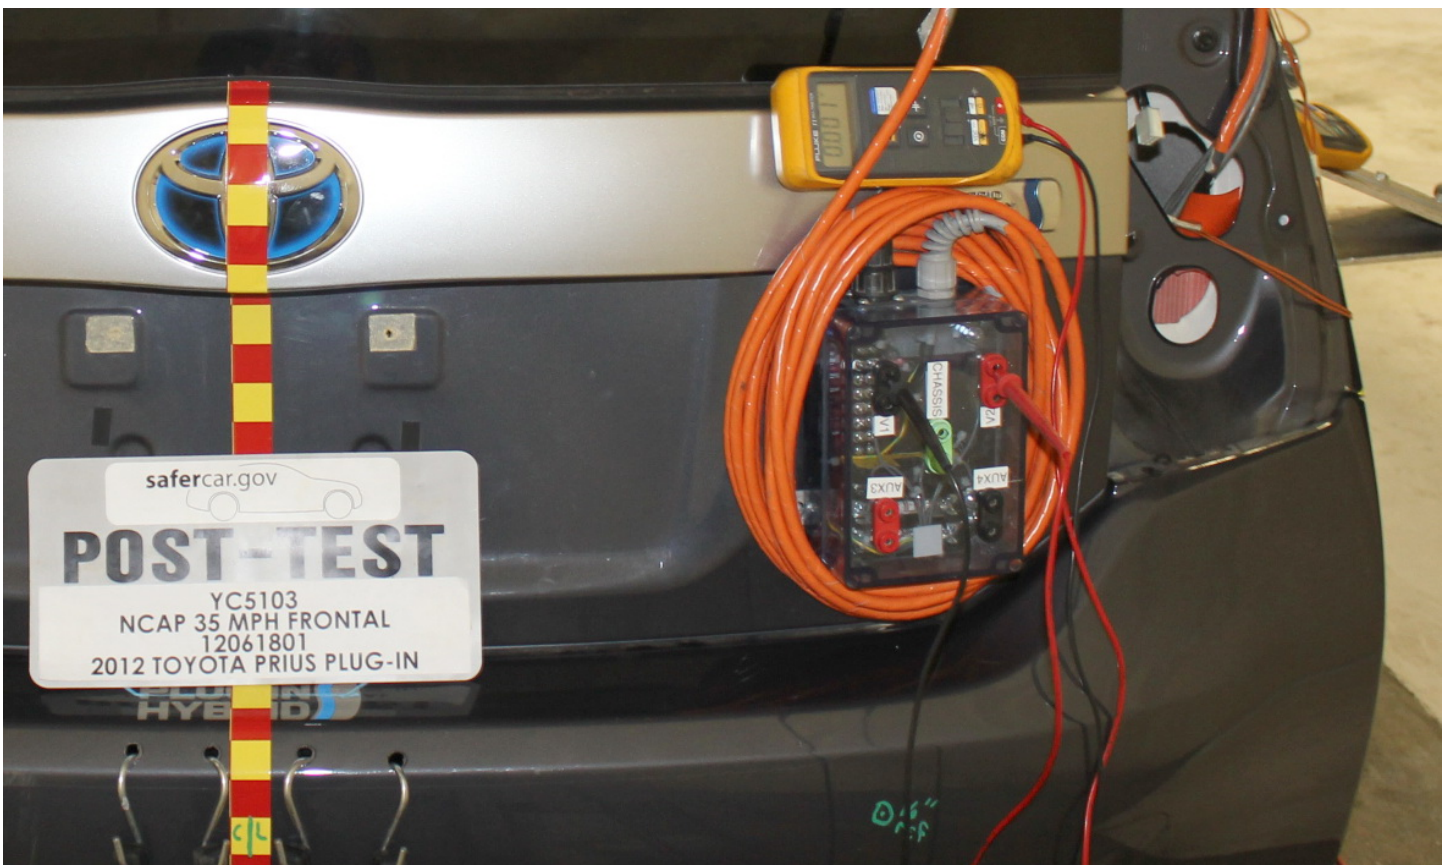

No. 025 Post-Impact View of Installed Impact Interface Port

PHOTOGRAPH NOT APPLICABLE

No. 026 Pre-Impact View of Other Test Devices

PHOTOGRAPH NOT APPLICABLE

No. 027 Post-Impact View of Other Test Devices



No. 028 FMVSS No. 305 Static Rollover at 90°



No. 029 FMVSS No. 305 Static Rollover at 180°



No. 030 FMVSS No. 305 Static Rollover at 270°



No. 031 FMVSS No. 305 Static Rollover at 360°



No. 032 Pre-Impact View of the Vehicle Passenger Compartment Adjacent to Propulsion Battery



No. 033 Post-Impact View of the Vehicle Passenger Compartment Adjacent to Propulsion Battery

PHOTOGRAPH NOT APPLICABLE

No. 034 Post-Impact Propulsion Battery System Mounting and-or Intrusion Failure(s)

PHOTOGRAPH NOT APPLICABLE

No. 035 Post-Impact View of Battery Component Intrusion

PHOTOGRAPH NOT APPLICABLE

No. 036 Post-Impact View of Battery Module Movement or Retention Loss

PHOTOGRAPH NOT APPLICABLE

No. 037 Post-Impact View of Propulsion Battery Electrolyte Spillage Location

PHOTOGRAPH NOT APPLICABLE

No. 038 Post-Test View of Propulsion Battery Electrolyte Spillage Location




No. 039 As Delivered Right Front $\frac{3}{4}$ View of Impact Vehicle



No. 040 As Delivered Left Rear ¾ View of Impact Vehicle



No. 041 Vehicle's Certification Label

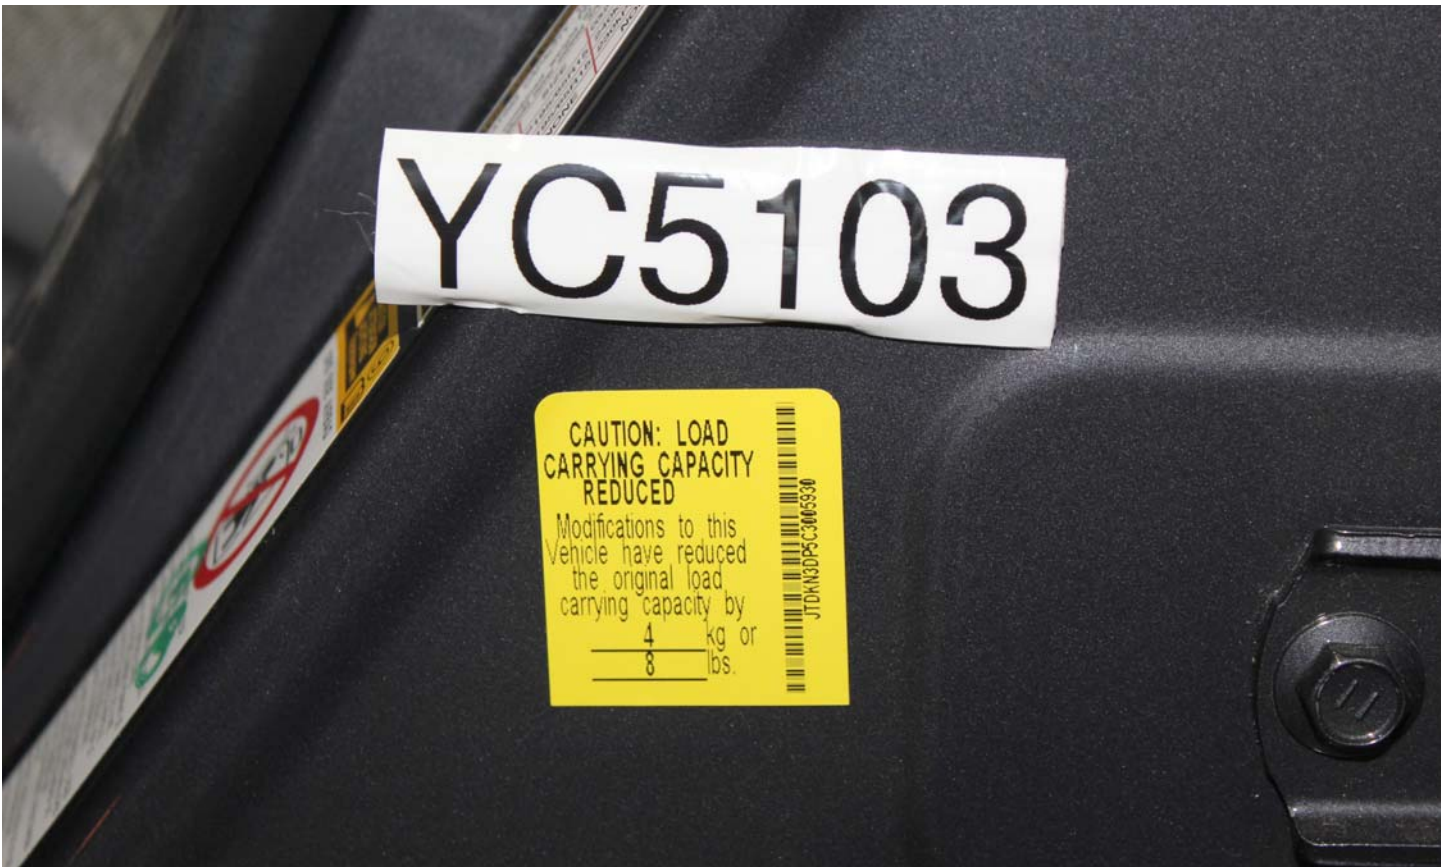

No. 042 Reduced Load Carrying Capacity Label



No. 043 Vehicle's Tire Information Placard or Label