

REPORT NUMBER: NCAP-KAR-13-045

**NEW CAR ASSESSMENT PROGRAM (NCAP)
FRONTAL BARRIER IMPACT TEST**

**TOYOTA MOTOR CORPORATION
2013 TOYOTA PRIUS C 5-DOOR HATCHBACK**

NHTSA NUMBER: MD5109

**PREPARED BY:
KARCO ENGINEERING, LLC.
9270 HOLLY ROAD
ADELANTO, CA 92301**



MARCH 7, 2013

FINAL REPORT

**U.S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
SAFETY PERFORMANCE STANDARDS
OFFICE OF CRASHWORTHINESS STANDARDS
1200 NEW JERSEY AVE, SE
ROOM W43-410
WASHINGTON, DC 20590**

TECHNICAL REPORT DOCUMENTATION PAGE

1. Report No. NCAP-KAR-13-045	2. Government Accession No.	3. Recipient's Catalog No.																																																					
4. Title and Subtitle Final Report of New Car Assessment Program Testing of a 2013 Toyota Prius C 5-Door Hatchback NHTSA No. MD5109		5. Report Date March 7, 2013																																																					
		6. Performing Organization Code KAR																																																					
7. Authors Mr. Steven D. Matsusaka, Project Engineer, KARCO Mr. Frank Richardson, Program Manager, KARCO		8. Performing Organization Report No. TR-P33001-13-NC																																																					
9. Performing Organization Name and Address KARCO Engineering, LLC. 9270 Holly Rd. Adelanto, CA 92301		10. Work Unit No.																																																					
		11. Contract or Grant No. DTNH22-12-D-00259																																																					
12. Sponsoring Agency Name and Address U. S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards 1200 New Jersey Ave., SE, Room W43-410 Washington, D.C. 20590		13. Type of Report and Period Covered Final Test Report, Feb. 21 - Mar. 7, 2013																																																					
		14. Sponsoring Agency Code NVS-111																																																					
15. Supplementary Notes																																																							
16. Abstract A 56.3 km/h NCAP Frontal Impact Test was conducted on a 2013 Toyota Prius C 5-door hatchback in accordance with the specifications of the Office of Crashworthiness Standards Frontal NCAP Laboratory Test Procedure. This test was conducted to obtain data indicant of FMVSS 208, 212, 219 (partial), 301, and footwell intrusion performance. The test was conducted at the KARCO Engineering, LLC. facility in Adelanto, California on February 21, 2013. The impact velocity of the vehicle was 55.65 km/h and the ambient temperature at the barrier face at the time of impact was 10.0 deg. C. The target vehicle's post-test maximum crush was 464 mm at DPD 4 to the right of the vehicle's centerline. The test vehicle's performance is as follows:																																																							
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Measurement Description</th> <th rowspan="2">Units</th> <th colspan="2">Driver ATD</th> <th colspan="2">Passenger ATD</th> </tr> <tr> <th>Threshold</th> <th>Result</th> <th>Threshold</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC₁₅)</td> <td>N/A</td> <td>700.0</td> <td>359.2</td> <td>700.0</td> <td>292.2</td> </tr> <tr> <td>Maximum Chest Compression</td> <td>mm</td> <td>63</td> <td>-25</td> <td>52</td> <td>-15</td> </tr> <tr> <td>Nij</td> <td>N/A</td> <td>1</td> <td>0.37</td> <td>1</td> <td>0.38</td> </tr> <tr> <td>Neck Tension</td> <td>N</td> <td>4170</td> <td>1782.8</td> <td>2620</td> <td>1201.5</td> </tr> <tr> <td>Neck Compression</td> <td>N</td> <td>4000</td> <td>-1165.8</td> <td>2520</td> <td>-163.2</td> </tr> <tr> <td>Left Femur Force</td> <td>N</td> <td>10008</td> <td>-1406.8</td> <td>6805</td> <td>-1659.4</td> </tr> <tr> <td>Right Femur Force</td> <td>N</td> <td>10008</td> <td>-2012.8</td> <td>6805</td> <td>-1550.0</td> </tr> </tbody> </table>				Measurement Description	Units	Driver ATD		Passenger ATD		Threshold	Result	Threshold	Result	Head Injury Criteria (HIC ₁₅)	N/A	700.0	359.2	700.0	292.2	Maximum Chest Compression	mm	63	-25	52	-15	Nij	N/A	1	0.37	1	0.38	Neck Tension	N	4170	1782.8	2620	1201.5	Neck Compression	N	4000	-1165.8	2520	-163.2	Left Femur Force	N	10008	-1406.8	6805	-1659.4	Right Femur Force	N	10008	-2012.8	6805	-1550.0
Measurement Description	Units	Driver ATD				Passenger ATD																																																	
		Threshold	Result	Threshold	Result																																																		
Head Injury Criteria (HIC ₁₅)	N/A	700.0	359.2	700.0	292.2																																																		
Maximum Chest Compression	mm	63	-25	52	-15																																																		
Nij	N/A	1	0.37	1	0.38																																																		
Neck Tension	N	4170	1782.8	2620	1201.5																																																		
Neck Compression	N	4000	-1165.8	2520	-163.2																																																		
Left Femur Force	N	10008	-1406.8	6805	-1659.4																																																		
Right Femur Force	N	10008	-2012.8	6805	-1550.0																																																		
17. Key Words 35 mph Frontal Barrier Impact Test New Car Assessment Program (NCAP)		18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division, NPO-411 1200 New Jersey Ave., SE Washington, DC 20590 e-mail: tis@nhtsa.dot.gov FAX: 202-493-2833																																																					
19. Security Classification of this report UNCLASSIFIED	20. Security Classification of this page UNCLASSIFIED	21. No. of Pages 135	22. Price																																																				

TABLE OF CONTENTS

<u>Section</u>		<u>Page No.</u>
1	Purpose and Summary of the Test	1
2	Occupant and Vehicle Information / Data Sheets	3
<u>Data Sheet No.</u>		<u>Page No.</u>
1	General Test and Vehicle Parameter Data	4
2	Seat Adjustment, Fuel Systems, and Steering Wheel Data	8
3	Dummy Longitudinal Clearance Dimensions	10
4	Dummy Lateral Clearance Dimensions	11
5	Seat Belt Positioning Data	12
6	High-Speed Camera Locations and Data	13
7	Vehicle Accelerometer Locations	15
8	Photographic Reference Target Locations	16
9	Load Cell Locations on Fixed Barrier	17
10	Test Vehicle Camera and Instrumentation Summary	18
11	Post-Test Observations	19
12	Vehicle Profile Measurements	20
13	Accident Investigation Division Data	22
14	Vehicle Intrusion Measurements	23
15	Summary of FMVSS 212 and FMVSS 219 (Partial) Data	28
16	FMVSS 301 Fuel Static Rollover Data	30
17	Dummy / Vehicle Temperature Stabilization	31
<u>Appendix</u>		<u>Page No.</u>
A	Photographs	A
B	Dummy Response Data Traces	B
C	Dummy Calibration and Performance Verification Data	C

SECTION 1

PURPOSE AND SUMMARY OF TEST

PURPOSE

This 56.3 km/h frontal barrier impact test is part of the Vehicle Barrier Impact Testing Program, sponsored by the National Highway Traffic Safety Administration (NHTSA) under contract number DTNH22-12-D-00259. The purpose of this test was to obtain vehicle crashworthiness and occupant restraint system performance data for consumer information purposes.

The 56.3 km/h frontal barrier impact test was conducted in accordance with the Office of Crashworthiness Standards Frontal NCAP Laboratory Test Procedure, dated September 2012.

SUMMARY

A load cell barrier consisting of 36 load cells was impacted by a 2013 Toyota Prius C 5-door hatchback at a velocity of 55.65 km/h. The test was performed at KARCO Engineering, LLC. on February 21, 2013. Pre- and post-test photographs of the vehicle and dummies can be found in Appendix A of this report.

Three (3) real-time cameras and sixteen (16) high-speed cameras were used to document the frontal barrier impact event. Camera locations and other pertinent camera information can be found in Data Sheet 6 of this report.

One Part 572E 50th percentile male anthropomorphic test device (ATD) was placed in the driver seating position and one Part 572O 5th percentile female ATD was placed in the right-front passenger seating position according to dummy placement instructions specified in the Frontal NCAP Laboratory Test Procedure.

Both ATDs were fully instrumented with head, chest and pelvis tri-axial accelerometers, chest displacement potentiometers, upper neck force transducers, right / left femur load cells, and lower leg instrumentation. Seat belt load cells were placed on the driver and passenger's lap belts to measure the dummy pelvic section loading. The driver (position 1) ATD (Serial No. 034) and the right-front passenger (position 2) ATD (Serial No. 141) were calibrated prior to this test. Certification details, along with instrumentation calibration data, are found in Appendix C of this report.

The 146 channels of data were recorded on an on-board data acquisition system. Appendix B contains the dummy response data traces.

There was 100% windshield retention and no intrusion into the protected zone of the windshield during the event. There was no Stoddard solvent leakage after the event or during any phase of the static rollover.

The maximum static crush of the test vehicle was 464 mm located at DPD 4 to the right of the vehicle's centerline. Both the driver and passenger side doors remained closed during the impact event and were operable after the impact.

The driver's visible contact points were as follows: The driver ATD's head contacted the airbag and the side header. The upper torso contacted the airbag. Both the left and right knees contacted the knee airbag.

The passenger's visible contact points were as follows: The passenger ATD's head contacted the airbag and the headrest. The upper torso contacted the airbag. Both the left and right knees contacted the glove box.

The occupant data is summarized below:

ATD Position	HIC ₁₅	T ¹	T ²	Chest Disp. (mm)	Nij	Neck Tension (N)	Neck Comp. (N)	Left Femur (N)	Right Femur (N)
Driver (50th)	359.2	91.9	106.1	-25	0.37	1782.8	-1165.8	-1406.8	-2012.8
Passenger (5th)	292.2	56.5	71.5	-15	0.38	1201.5	-163.2	-1659.4	-1550.0

SECTION 2
DATA SHEETS

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback NHTSA No.: MD5109
 Test Program: 56 km/h Frontal Impact NCAP Test Test Date: 02/21/13

CONVERSION FACTORS

Quantity	Typical Application	Std Units	Metric Unit	Multiply By
Mass	Vehicle Weight	lb	kg	0.4536
Linear Velocity	Impact Velocity	miles/hr	km/hr	1.609344
Length or Distance	Measurements	in	mm	25.4
Volume	Fuel Systems	gal	liter	3.785
Volume	Small Fluids	oz	mL	29.574
Pressure	Tire Pressures	lbf/in ²	kPa	6.895
Temperature	General Use	°F	°C	$=(T_f - 32)/1.8$
Force	Dynamic Forces	lbf	N	4.448
Moment	Torque	lbf-ft	N•m	1.355

DATA SHEET NO. 1

GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback NHTSA No.: MD5109
 Test Program: 56 km/h Frontal Impact NCAP Test Test Date: 02/21/13

TEST VEHICLE INFORMATION AND OPTIONS

NHTSA Number	MD5109
Model Year	2013
Make	Toyota
Model	Prius C
Body Style	5-Door Hatchback
VIN	JTDKDTB33D1528623
Body Color	Classic Silver Metallic
Odometer Reading (km / mi)	50 / 31
Engine Displacement (L)	1.5
Type / No. of Cylinders	Inline 4
Engine Placement	Transverse
Transmission Type	Automatic
Transmission Speeds	1
Overdrive	Yes
Final Drive	Front
Roof Rack	No
Sunroof / T-Top	No
Running Boards	No
Tilt Steering Wheel	Yes
Power Seats	No
Anti-Lock Brakes (ABS)	Yes
Automatic Door Locks (ADLs)	Yes

Traction Control System	Yes
Power Steering	Yes
Power Window Auto-Reverse	No
Driver Frontal Airbag	Yes
Driver Curtain Airbag	Yes
Driver Head/Torso Airbag	No
Driver Torso Airbag	No
Driver Torso/Pelvis Airbag	Yes
Driver Pelvis Airbag	No
Driver Knee Airbag	Yes
Front Pass. Frontal Airbag	Yes
Front Pass. Curtain Airbag	Yes
Front Pass. Head/Torso Airbag	No
Front Pass. Torso Airbag	No
Front Pass. Torso/Pelvis Airbag	Yes
Front Pass. Pelvis Airbag	No
Front Pass. Knee Airbag	No
Driver Seat Belt Pretensioner	Yes
Driver Load Limiter	Yes
Front Pass. Seat Belt Pretensioner	Yes
Front Pass. Load Limiter	Yes
Other	Seat Cushion Airbags

Does Owner's Manual provide instructions to turn off automatic door locks? Yes

DATA FROM CERTIFICATION LABEL

Manufactured By	Toyota Motor Corporation
Date of Manufacture	Dec-12

GVWR (kg)	1576
GAWR Front (kg)	830
GAWR Rear (kg)	830

VEHICLE SEATING AND CAPACITY WEIGHT INFORMATION

Measured Parameter	Front	Rear	Third	Total	
Type of Seats	Bucket	Bench			
Designated Seating Capacity	2	3		5	
Capacity Weight (VCW) (kg)				376.0	A
DSC x 68.04 (kg)				340.2	B
Cargo Weight (RCLW) (kg)				35.8	A-B

DATA SHEET NO. 1 ... (CONTINUED)

GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback NHTSA No.: MD5109
 Test Program: 56 km/h Frontal Impact NCAP Test Test Date: 02/21/13



VEHICLE TIRE INFORMATION

Measured Parameter	Front	Rear
Max. Tire Pressure (kPa)	350	350
Cold Pressure (kPa)	240	230
Recommended Tire Size	P175/65 R15	P175/65 R15
Tire Size on Vehicle	P175/65 R15	P175/65 R15
Tire Manufacturer	Goodyear	Goodyear
Tire Model	Assurance	Assurance
Treadwear	580	580
Traction	A	A
Temperature Grades	A	A
Tire Plies Sidewall	1 Polyester	1 Polyester
Tire Plies Body	1 Polyester, 1 Nylon, 2 Steel	1 Polyester, 1 Nylon, 2 Steel
Load Index / Speed Symbol	84H	84H
Tire Material	Polyester, Nylon, Steel	Polyester, Nylon, Steel
DOT Safety Code Left	EUYU 3MNR 4712	EUYU 3MNR 4712
DOT Safety Code Right	EUYU 3MNR 4712	EUYU 3MNR 4712

DATA SHEET NO. 1 ... (CONTINUED)

GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback NHTSA No.: MD5109
 Test Program: 56 km/h Frontal Impact NCAP Test Test Date: 02/21/13

TEST VEHICLE WEIGHTS

	Units	As Delivered Weights (UVW)			As Tested Weights (ATW)		
		Front Axle	Rear Axle	Total	Front Axle	Rear Axle	Total
Left	kg	357.0	224.5		393.5	280.5	
Right	kg	345.0	215.0		370.5	269.0	
Ratio	%	61.5%	38.5%	100.0%	58.2%	41.8%	100.0%
Total	kg	702.0	439.5	1141.5	764.0	549.5	1313.5

TARGET TEST WEIGHT CALCULATION

Measured Parameter	Units	Value	
Total Delivered Weight (UVW)	kg	1141.5	A
Weight of 1 P572E ATD & 1 P572O ATD	kg	141.0	B
Rated Cargo/Luggage Weight (RCLW)	kg	35.8	C
Calculated Vehicle Target Weight (TVTW)	kg	1318.3	A+B+C

TEST VEHICLE ATTITUDES

Condition	Units	LF	RF	LR	RR	CG Aft of Front Axle
As Delivered	mm	655	670	661	661	982
As Tested	mm	644	647	626	632	1067
Post-Test	mm	635	656	621	632	

GENERAL TEST VEHICLE DATA

Measurement Description	Units	Value
Total Vehicle Wheel Base	mm	2550
Total Vehicle Length at Left Side	mm	3380
Total Vehicle Length at Centerline	mm	3995
Total Vehicle Length at Right Side	mm	3379
Weight of Ballast in Cargo Area	kg	83.6
Weight of Vehicle Components Removed	kg	58.5
Amount of Stoddard Solvent in Fuel Tank	L	33.44

VEHICLE COMPONENTS REMOVED TO MEET TEST WEIGHT:

Outboard Mirrors (2.0 kg), Tail Lights (3.0 kg), Rear Seat Back (12.5 kg), Rear Bumper Assembly (9.0 kg), Rear Seat Cushion (4.5 kg), Rear Door Trim and Windows (12.0 kg), Spare Tire and Tools (15.5 kg)

DATA SHEET NO. 1 ... (CONTINUED)

GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback NHTSA No.: MD5109
Test Program: 56 km/h Frontal Impact NCAP Test Test Date: 02/21/13

TARGET VEHICLE STRUCTURAL MEASUREMENTS

No.	Description	Pre-Test
1	Total Length	3995
2	Total Width	1695
3	Bumper Top Height	660
4	Bumper Bottom Height	279
5	Longitudinal Member Top Height	500
6	Distance Between Longitudinal Members	830
7	Longitudinal Member Width	60
8	Engine Top Height	750
9	Engine Bottom Height	176
10	Engine and Gearbox Width	260
11	Front Bumper to Engine Distance	520
12	Front Shock Absorber Fixing Height	835
13	Bonnet Leading Edge Height	720
14	Front Shock Absorber Fixing Width	1100
15	Front Bumper to Front Axle Distance	803
16	Front Axle to A-Pillar Distance	425
17	A-Pillar to B-Pillar Distance	930
18	B-Pillar to Rear Axle Distance	1085
19	B-Pillar to C-Pillar Distance	955
20	Roof Sill Bottom Height	1305
21	Roof Sill Top Height	1420
22	Floor Sill Bottom Height	193
23	Floor Sill Top Height	300

All measurements in millimeters.


DATA SHEET NO. 2

SEAT ADJUSTMENT, FUEL SYSTEMS, AND STEERING WHEEL DATA

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback NHTSA No.: MD5109
 Test Program: 56 km/h Frontal Impact NCAP Test Test Date: 02/21/13

NOMINAL DESIGN RIDING POSITION

The procedure for the driver is as follows: the seat back is set to the manufacturer's designated angle. The procedure for the passenger is as follows: the seat back is set to position the transverse instrumentation platform of the dummy's head at $0^\circ \pm 0.5^\circ$. Seat back angle is measured at the headrest using a digital inclinometer.

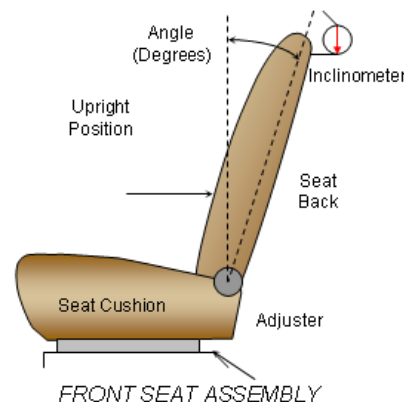


SEAT BACK ANGLE

Seating Position	Degrees
Driver Seat Back Angle	75.3
Passenger Seat Back Angle	76.7

SEAT FORE / AFT POSITIONING

The total seat travel is measured from the forward most possible position to the rear most possible position. The driver's seat is set to the middle of the fore-aft travel. The passenger's seat is set to the forward most position where the ATD will not contact any interior panels.

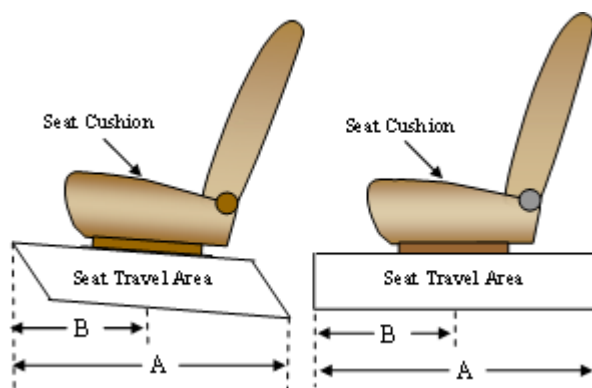

SEAT FORE/AFT POSITIONS

Seating Position	Total Fore-Aft Travel	Placed in Position
Driver Seat	240 mm	120 mm
Passenger Seat	240 mm	0 mm

SEAT BELT UPPER ANCHORAGE

The seat belt upper anchorage is positioned to the manufacturer's design position for a 50th percentile adult male ATD for the driver, and a 5th percentile adult female ATD for the passenger. Position "H" is the uppermost position, followed by position "M1". Position "L" is the lowermost position.

SEAT BELT UPPER ANCHORAGES

Seating Position	Total No. of Positions	Placed in Position
Driver Seat	Fixed	Fixed
Passenger Seat	Fixed	Fixed

DATA SHEET NO. 2 ... (CONTINUED)

SEAT ADJUSTMENT, FUEL SYSTEMS, AND STEERING WHEEL DATA


Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback NHTSA No.: MD5109
 Test Program: 56 km/h Frontal Impact NCAP Test Test Date: 02/21/13

FUEL TANK CAPACITY

Description	Liters
Usable Capacity of "Standard Tank"	35.96
Usable Capacity of "Optional Tank"	
92 - 94% of Usable Capacity	33.08 to 33.80
Actual Amount of Stoddard Solvent Used	33.44
1/3 of Usable Capacity	8.84

FUEL PUMP


The vehicle is equipped with an electric fuel pump. The fuel pump is activated when the ignition is turned on.

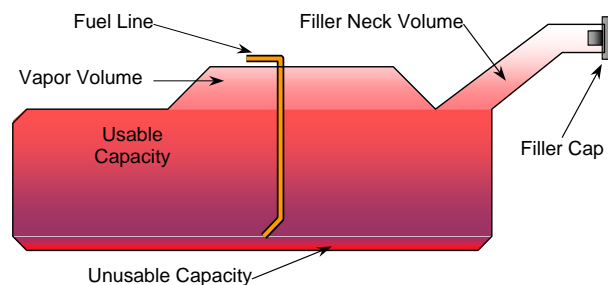

VEHICLE FUEL TANK ASSEMBLY

STEERING COLUMN ADJUSTMENT

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes when moved through its full range of motion. A digital inclinometer is used to measure a plate which is placed across the rim of the steering wheel for angular measurements. A tape measure is used to measure telescoping steering wheel travel.

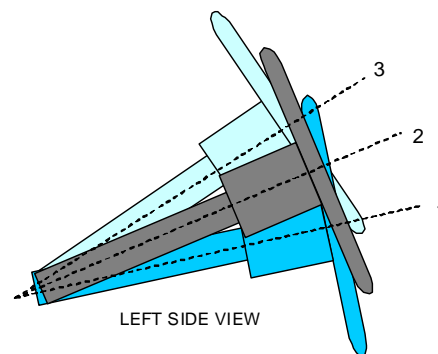

STEERING COLUMN ASSEMBLY

STEERING COLUMN POSITIONING

	Degrees	Fore-Aft Position (mm)
Lowermost Position, No. 1	22.4	124
Geometric Center Position, No. 2	23.9	133
Uppermost Position, No. 3	25.5	142
Telescoping Steering Wheel Travel		18
Test Position	23.9	133

DATA SHEET NO. 3


DUMMY LONGITUDINAL CLEARANCE DIMENSIONS

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback

NHTSA No.: MD5109

Test Program: 56 km/h Frontal Impact NCAP Test

Test Date: 02/21/13

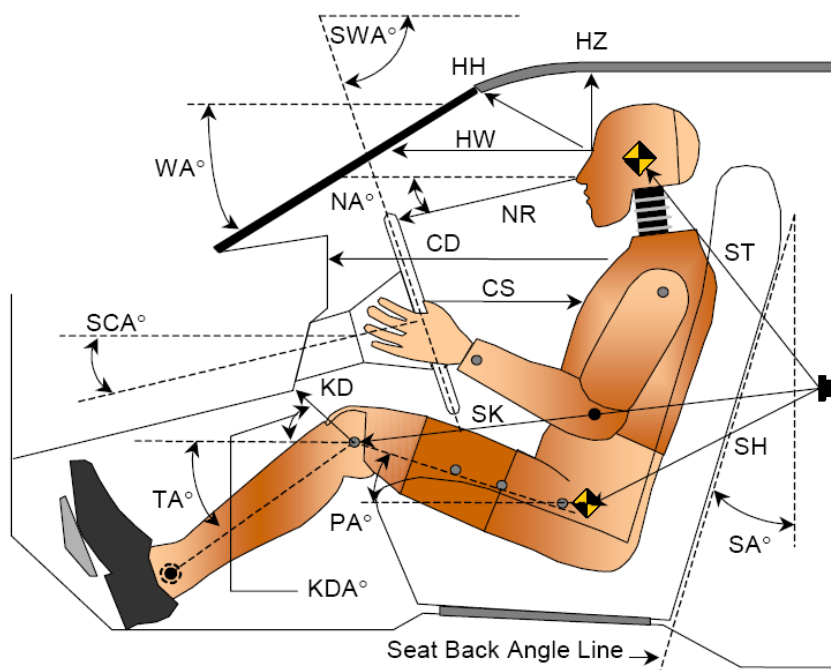


LEFT SIDE VIEW

Code	Measurement Description	Driver		Passenger	
		Length (mm)	Angle (°)	Length (mm)	Angle (°)
WA°	Windshield Angle		22.8		
SWA°	Steering Wheel Angle		66.0		
SCA°	Steering Column Angle		24.0		
SA°	Seat Back Angle (On Headrest Post)		75.3		76.7
HZ	Head to Roof	179	90.0	230	90.0
HH	Head to Header	345	28.8	311	41.5
HW	Head to Windshield	682	0.0	699	0.0
NR	Nose to Rim	386	12.2	452	21.0
CD	Chest to Dash	720		426	2.5
CS	Chest to Steering Hub	292	0.0		
RA	Rim to Abdomen	201	0.0		
KDL	Left Knee to Dash	161	38.5	67	23.0
KDR	Right Knee to Dash	180	19.3	65	21.2
PA°	Pelvic Angle		23.2		20.5
TA°	Tibia Angle		46.9		62.8
SK	Striker to Knee	569	5.0	650	9.9
ST	Striker to Head	465	80.7	436	63.2
SH	Striker to H-Point	269	44.1	373	27.3

DATA SHEET NO. 4

DUMMY LATERAL CLEARANCE DIMENSIONS

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback NHTSA No.: MD5109
 Test Program: 56 km/h Frontal Impact NCAP Test Test Date: 02/21/13

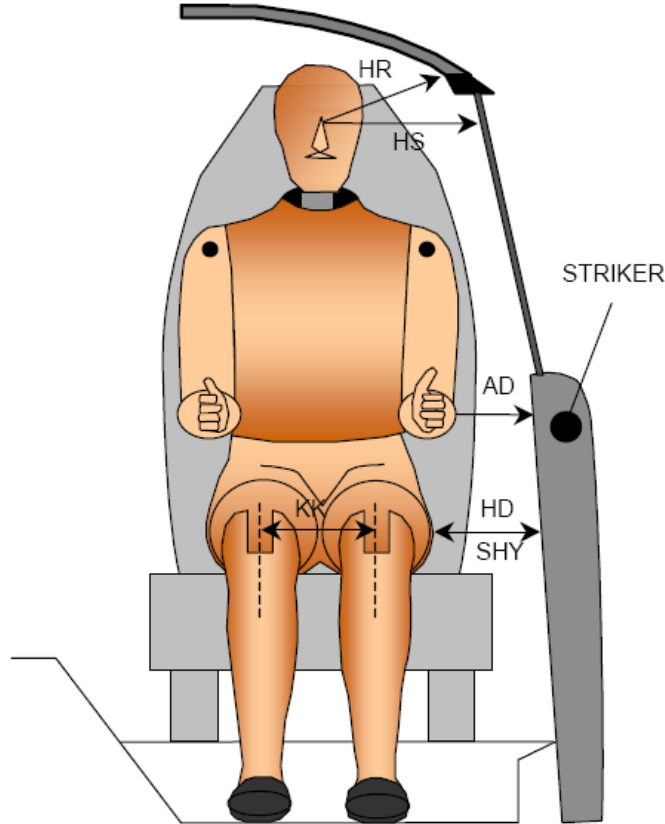

Code	Description	Driver (mm)	Passenger (mm)
AD	Arm to Door	119	77
HD	H-Point to Door	138	176
HR	Head to Side Header	203	260
HS	Head to Side Window	327	376
KK	Knee to Knee	355	220
SHY	Striker to H-Point (Y-Direction)	233	270
AA	Ankle to Ankle	360	170


DATA SHEET NO. 5
SEAT BELT POSITIONING DATA

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback

NHTSA No.: MD5109

Test Program: 56 km/h Frontal Impact NCAP Test

Test Date: 02/21/13

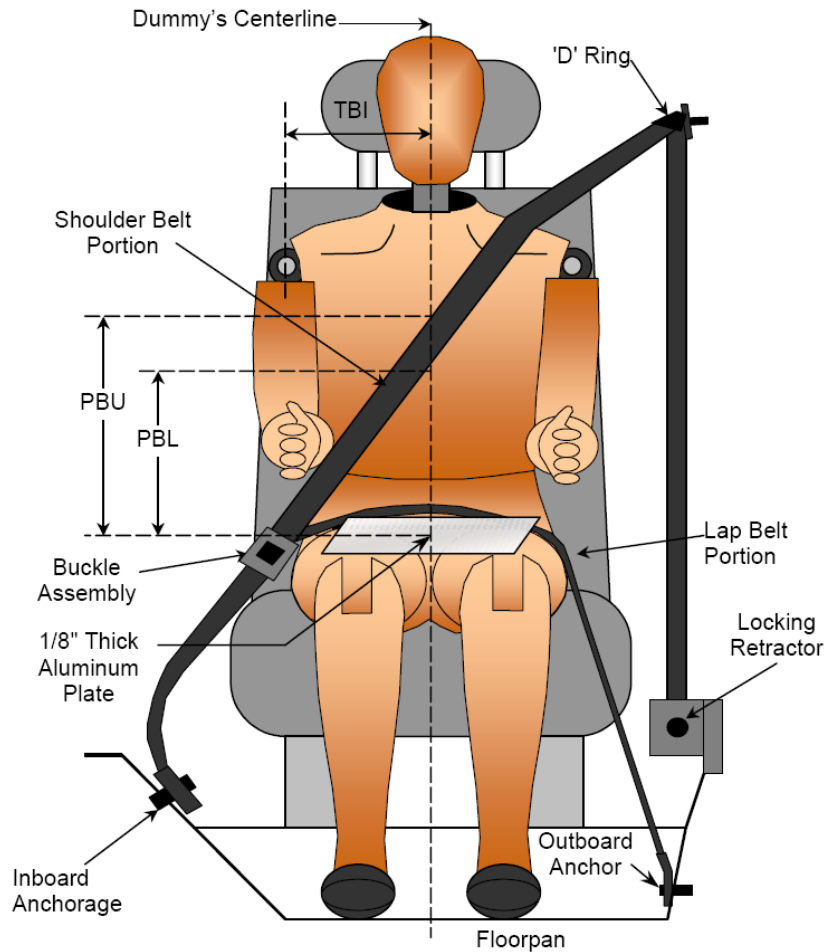

FRONT VIEW OF DUMMY

SEAT BELT POSITIONING MEASUREMENTS

Code	Measurement Description	Units	Driver	Passenger
PBU	Top Surface of Aluminum Plate to Belt Upper Edge	mm	345	275
PBL	Top Surface of Aluminum Plate to Belt Lower Edge	mm	272	195

BELT LENGTH DATA


Measurement Description	Units	Driver	Passenger
Shoulder Belt Length as Measured on ATD	mm	857	910
Lap Belt Length as Measured on ATD	mm	855	918
Remainder of Belt on Reel	mm	968	864
Total Belt Length for Continuous Webbing Systems	mm	2680	2692

DATA SHEET NO. 6

HIGH-SPEED CAMERA LOCATIONS AND DATA

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback NHTSA No.: MD5109
Test Program: 56 km/h Frontal Impact NCAP Test Test Date: 02/21/13

CAMERA POSITIONS FOR FRONTAL IMPACTS

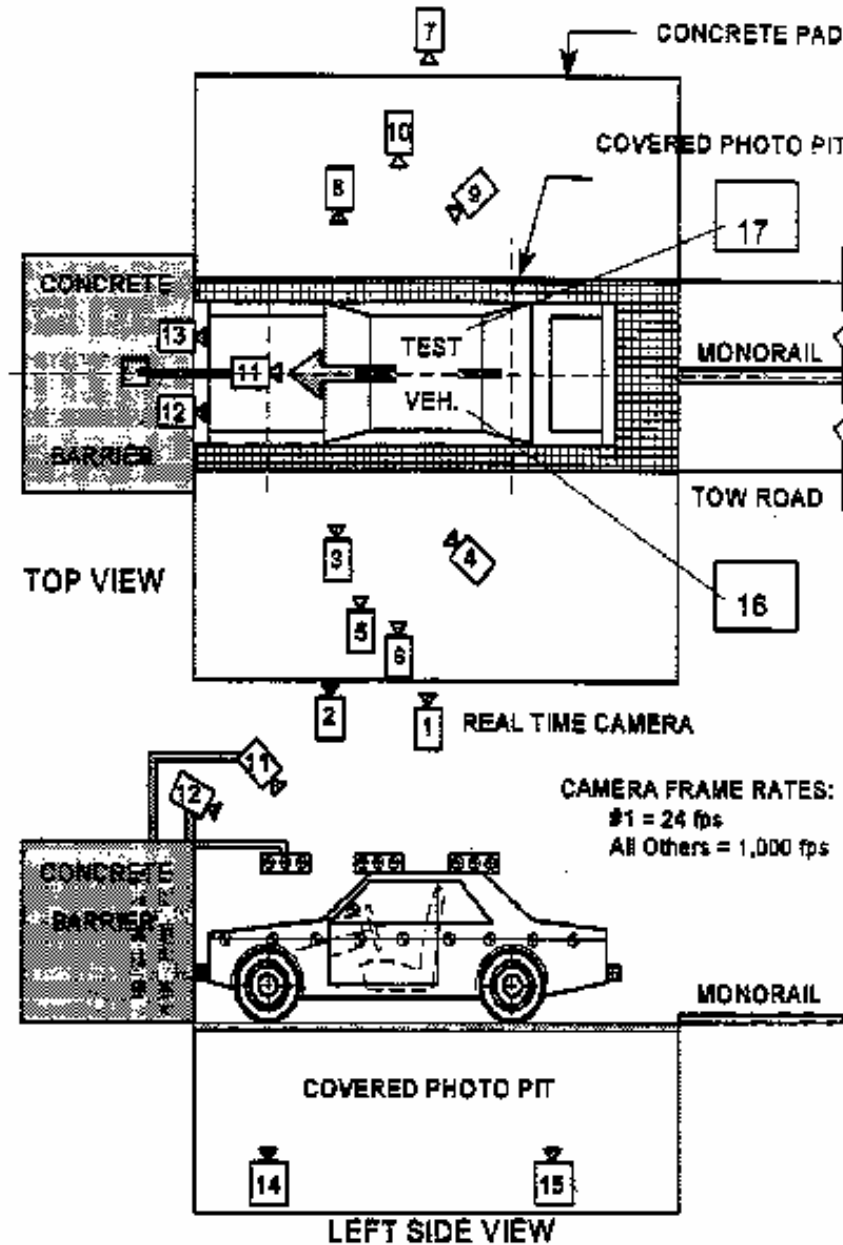

DATA SHEET NO. 6 ... (CONTINUED)

HIGH-SPEED CAMERA LOCATIONS AND DATA

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback NHTSA No.: MD5109
 Test Program: 56 km/h Frontal Impact NCAP Test Test Date: 02/21/13

CAMERA LOCATIONS


No.	Description	Location (mm)			Lens (mm)	Speed (fps)
		X	Y	Z		
1	Real-Time Left Overall	-11412	-8150	-1484		30
2	Driver Close-Up	-2590	-7950	-1371	24	1000
3	Left Front Half	-1701	-6197	-1701	50	1000
4	Left Angle	-6696	-10308	-3211	ZOOM	1000
5	Steering Column - Top	-1966	-10412	-3688	50	1000
6	Steering Column - Bottom	-1972	-10412	-3379	50	1000
7	Right Overall	-2336	7569	-1012	24	1000
8	Passenger Close-Up	-1733	7581	-1408	50	1000
9	Right Front Half	-1600	8214	-1811	ZOOM	1000
10	Right Angle	-6217	9516	-4830	ZOOM	1000
11	Windshield	-354	0	-5749	12	1000
12	Driver Windshield	297	-366	-2460	12	1000
13	Passenger Windshield	297	366	-2460	24	1000
14	Pit Front	-756	0	1495	12	1000
15	Pit Rear	-3398	0	1495	8	1000
16	Onboard Driver Airbag (Optional)	-870	230	-1270	12	1000
17	Onboard Passenger Airbag (Optional)	-870	-230	-1270	12	1000
18	Real-Time Left View of Impact					
19	Real-Time Right View of Impact					

Coordinates: +X = forward impact plane
 +Y = right of monorail center
 +Z = into ground

DATA SHEET NO. 7

VEHICLE ACCELEROMETER LOCATIONS

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback NHTSA No.: MD5109
 Test Program: 56 km/h Frontal Impact NCAP Test Test Date: 02/21/13

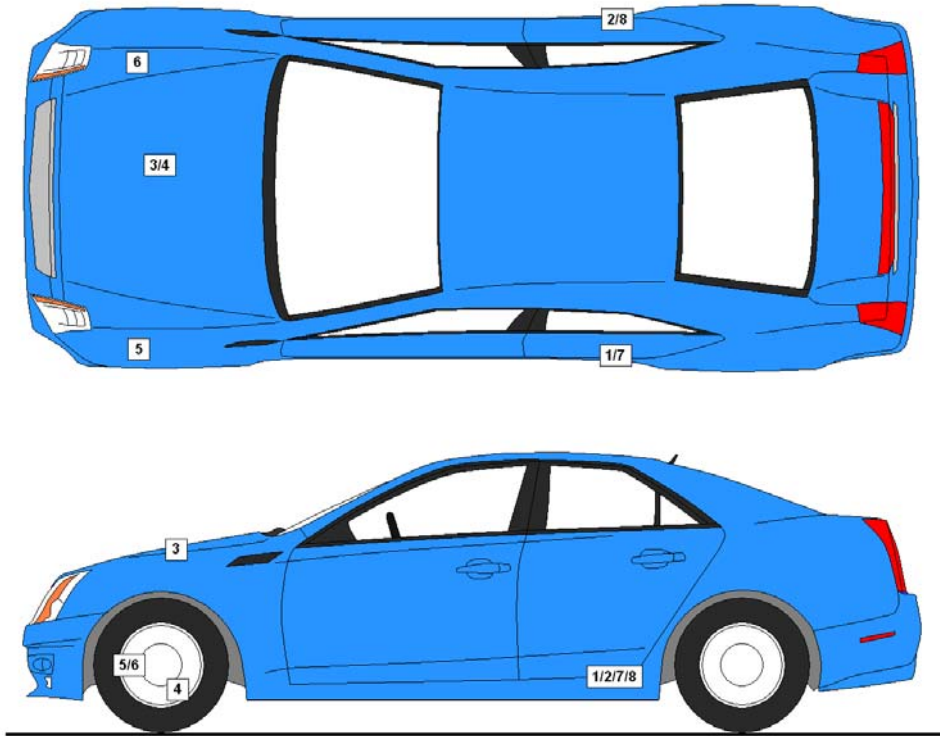

VEHICLE ACCELEROMETER PRE-TEST LOCATIONS

No.	Description	Location		
		X	Y	Z
1	Left Rear Accelerometer X-Direction	1315	-718	-293
2	Right Rear Accelerometer X-Direction	1315	718	-293
3	Engine Top X	3269	365	-798
4	Engine Bottom X	3322	253	-169
5	Left Rear Accelerometer Z-Direction	1315	-718	-293
6	Right Rear Accelerometer Z-Direction	1315	718	-293

Reference Points: X – Rear Surface of Vehicle (+ forward)
 Y – Vehicle Centerline (+ to right)
 Z – Ground Plane (+ down)


DATA SHEET NO. 8

PHOTOGRAPHIC REFERENCE TARGET LOCATIONS

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback NHTSA No.: MD5109

Test Program: 56 km/h Frontal Impact NCAP Test Test Date: 02/21/13

Item	Value
A	333
B	848
C	1965
D	610
E	1424
F	305
G	1535
H	535
I	1217
J	864
K	864
L	1044
M	563
N	1047
O	863
P	863
Q	1205

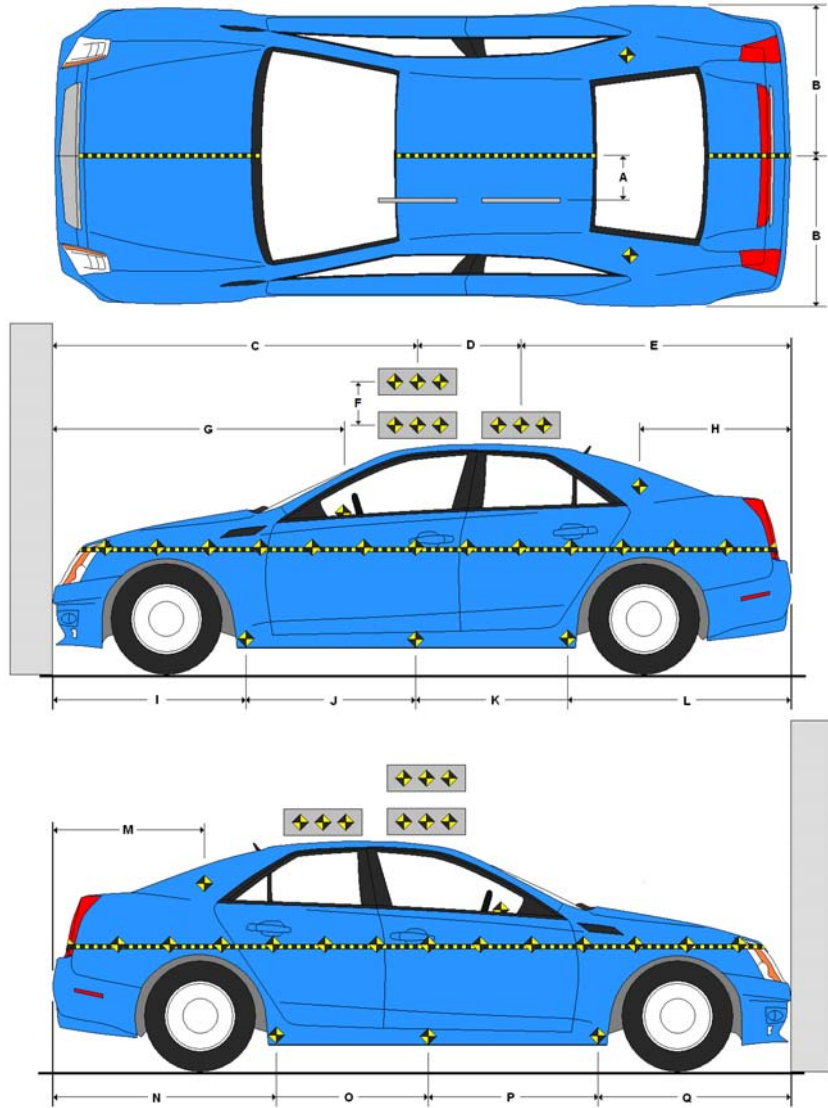

All measurements in millimeters.



DATA SHEET NO. 9

LOAD CELL LOCATIONS ON FIXED BARRIER

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback NHTSA No.: MD5109

Test Program: 56 km/h Frontal Impact NCAP Test Test Date: 02/21/13

**36 Load Cell Rigid Barrier (NHTSA Standard)
Load Cell Locations on Fixed Barrier**

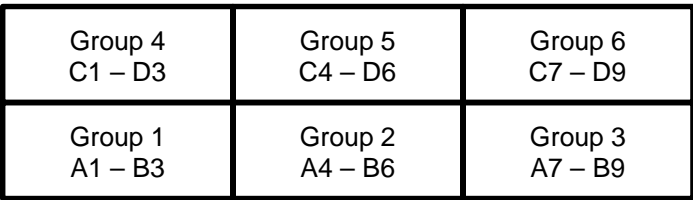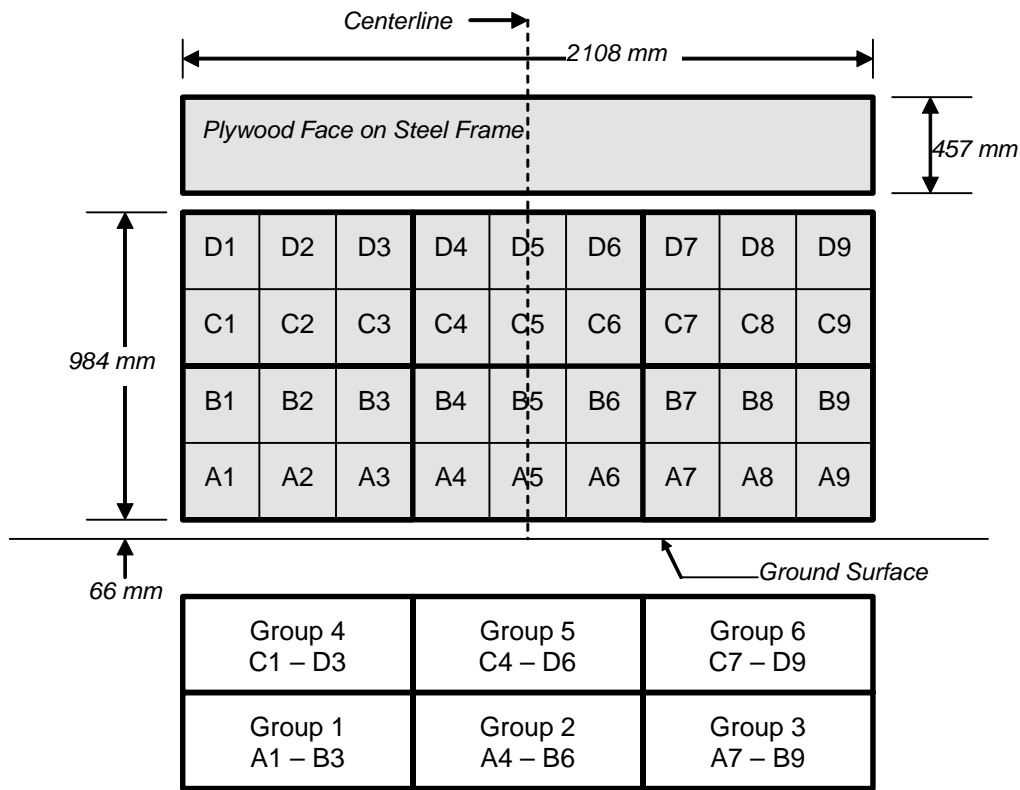

6 Groups of 6 Load Cells Each

DATA SHEET NO. 10

TEST VEHICLE CAMERA AND INSTRUMENTATION SUMMARY

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback NHTSA No.: MD5109
Test Program: 56 km/h Frontal Impact NCAP Test Test Date: 02/21/13

INSTRUMENTATION

Driver Dummy Accelerometers	50
Passenger Dummy Accelerometers	50
Vehicle Structure Accelerometers	8
Seat Belt Load Cells	2
Load Cell Barrier	36
Total	146

CAMERA COVERAGE

High-Speed Vehicle On Board	2
High-Speed Off board	14
Real Time	3
Total	19

DATA SHEET NO. 11
POST-TEST OBSERVATIONS

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback NHTSA No.: MD5109
 Test Program: 56 km/h Frontal Impact NCAP Test Test Date: 02/21/13

TEST DUMMY INFORMATION AND CONTACT

Description	Driver	Passenger
Dummy Type/Serial No.	P572E 50th Percentile Male ATD / 034	P572O 5th Percentile Female ATD / 141
Head Contact	Airbag, Side Header	Airbag, Headrest
Upper Torso Contact	Airbag	Airbag
Lower Torso Contact	None	None
Left Knee Contact	Knee Airbag	Glovebox
Right Knee Contact	Knee Airbag	Glovebox

DOOR OPENING AND SEAT TRACK INFORMATION

Description	Driver	Passenger
Locked / Unlocked Doors	Unlocked	Unlocked
Front Door Opening	Remained closed and latched, operational	Remained closed and latched, operational
Rear Door Opening	Remained closed and latched, operational	Remained closed and latched, operational
Seat Track Shift (mm)	9	-12
Seat Back Failure	None	None
Glazing Damage	None	None

POST TEST STRUCTURAL OBSERVATIONS

Critical Areas of Performance	Observations and Conclusions
Windshield Damage	Broken
Window Damage	None
Other Notable Effects	None

VEHICLE REBOUND FROM BARRIER


Measured Parameter	Units	Value
Left Side	mm	4960
Center	mm	4870
Right Side	mm	4820
Average	mm	4883

SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION

Restraint Type	Driver		Passenger	
	Installed	Operated	Installed	Operated
Front Airbag	Yes	Yes	Yes	Yes
Side Airbag 1 (Curtain)	Yes	No	Yes	No
Side Airbag 2 (Torso/Pelvis)	Yes	No	Yes	No
Knee Airbag	Yes	Yes	No	
Seat Belt Pretensioner	Yes	Yes	Yes	Yes
Seat Belt Load Limiter	Yes	Yes	Yes	Yes
Seat Cushion Airbag	Yes	Yes	Yes	Yes

DATA SHEET NO. 12
VEHICLE PROFILE MEASUREMENTS

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback NHTSA No.: MD5109
 Test Program: 56 km/h Frontal Impact NCAP Test Test Date: 02/21/13

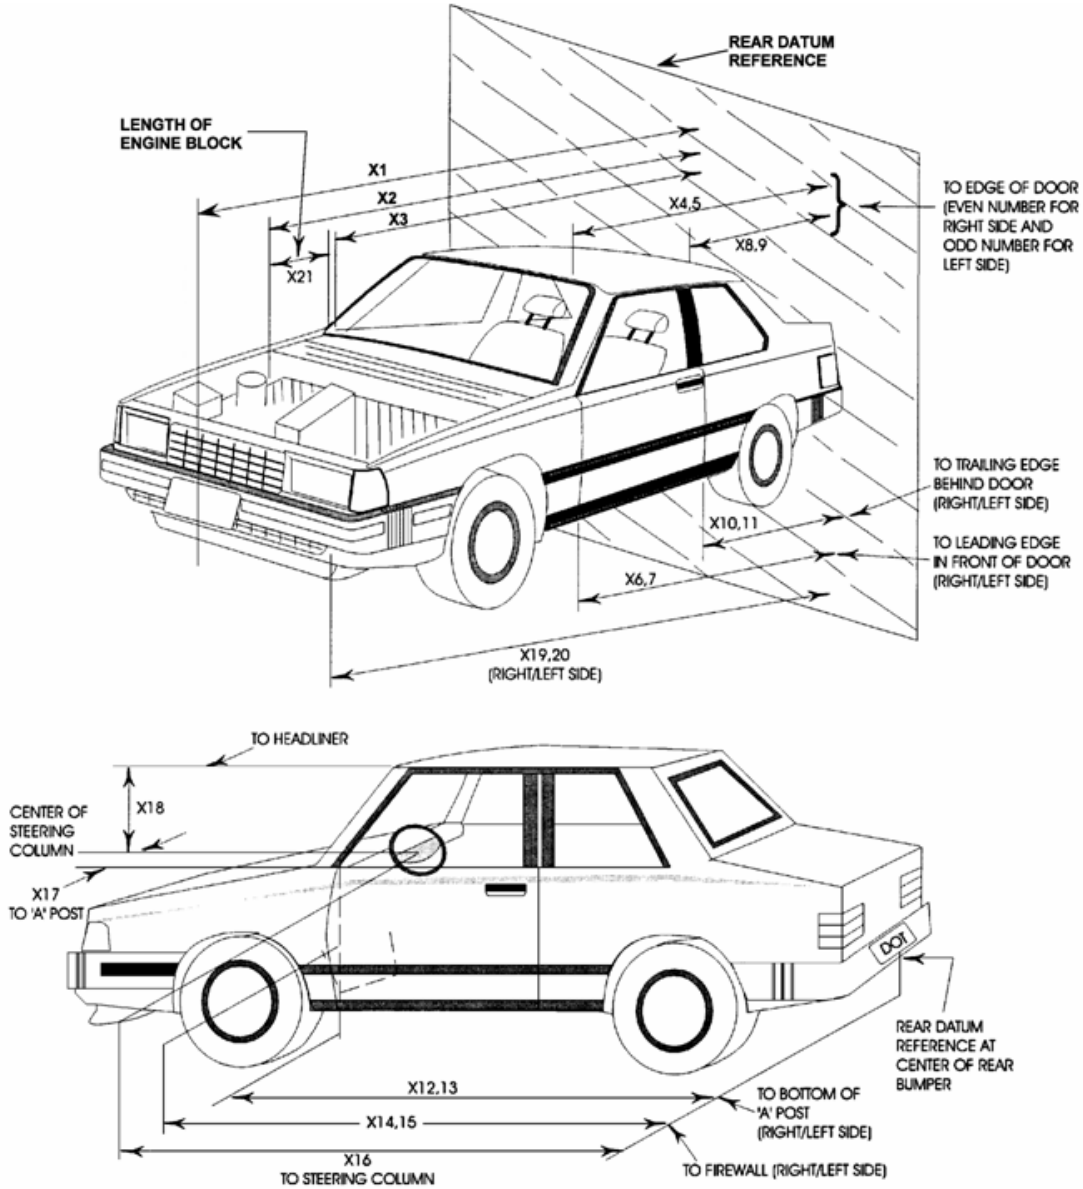

DATA SHEET NO. 12 ... (CONTINUED)

VEHICLE PROFILE MEASUREMENTS

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback NHTSA No.: MD5109
 Test Program: 56 km/h Frontal Impact NCAP Test Test Date: 02/21/13

No.	Description	Pre-Test	Post-Test	Difference
1	Total Length of Vehicle at Centerline	3995	3539	-456
2	Rear Surface of Vehicle to Front of Engine	3475	3224	-251
3	RSOV to Firewall	3015	2980	-35
4	RSOV to Upper Leading Edge of Right Door	2800	2815	15
5	RSOV to Upper Leading Edge of Left Door	2797	2821	24
6	RSOV to Lower Leading Edge of Right Door	2745	2745	0
7	RSOV to Lower Leading Edge of Left Door	2755	2757	2
8	RSOV to Upper Trailing Edge of Right Door	1695	1715	20
9	RSOV to Upper Trailing Edge of Left Door	1692	1717	25
10	RSOV to Lower Trailing Edge of Right Door	1714	1710	-4
11	RSOV to Lower Trailing Edge of Left Door	1715	1720	5
12	RSOV to Bottom of A-Pillar, Right Side	2768	2776	8
13	RSOV to Bottom of A-Pillar, Left Side	2758	2781	23
14	RSOV to Firewall, Right Side	3003	3207	204
15	RSOV to Firewall, Left Side	3003	3145	142
16	RSOV to Steering Column	2295	2360	65
17	Center of Steering Column to A-Pillar	430	400	-30
18	Center of Steering Column to Headliner	435	500	65
19	RSOV to Right Side of Front Bumper	3379	3227	-152
20	RSOV to Left Side of Front Bumper	3380	3227	-153
21	Length of Engine Block	440	440	0
RD	RSOV to Right Side of Dash Panel	2510	2500	-10
CD	RSOV to Center of Dash Panel	2455	2410	-45
LD	RSOV to Left Side of Dash Panel	2500	2505	5

All measurements in millimeters.

DATA SHEET NO. 13
ACCIDENT INVESTIGATION DATA

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback NHTSA No.: MD5109
 Test Program: 56 km/h Frontal Impact NCAP Test Test Date: 02/21/13


VEHICLE INFORMATION

VIN: JTDKDTB33D1528623 Wheelbase (mm): 2550
 Vehicle Size Category: 5-Door Hatchback Test Weight (kg): 1313.5

ACCELEROMETER DATA

Accelerometer Locations: Left Rear Crossmember
 Cal. Procedure/Interval: Drop Test / 6 months
 Integration Algorithm: NHTSA Standard
 Impact Velocity (km/h): 55.65
 Velocity Change (km/h): 65.8
 Time of Separation (msec): 59.3

Linearity: Good

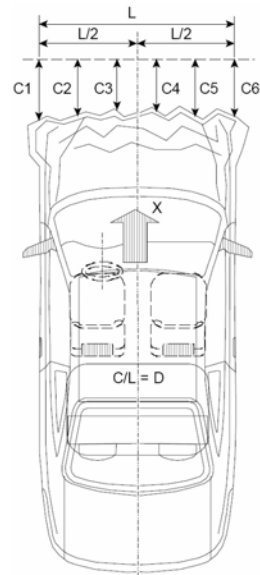

CRUSH PROFILE

Collision Deformation Classification: 12FDEW2
 Midpoint of Damage: Vehicle Centerline
 Damage Region Length (mm): 1304
 Impact Mode: Full Frontal

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
C1	Crush Zone 1 at Left Side	mm	185	463	278
C2	Crush Zone 2 at Left Side	mm	47	455	408
C3	Crush Zone 3 at Left Side	mm	6	455	449
C4	Crush Zone 4 at Right Side	mm	6	470	464
C5	Crush Zone 5 at Right Side	mm	47	500	453
C6	Crush Zone 6 at Right Side	mm	185	490	305
L	C1 to C6	mm	1304		

DATA SHEET NO. 14

VEHICLE INTRUSION MEASUREMENTS



Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback NHTSA No.: MD5109
 Test Program: 56 km/h Frontal Impact NCAP Test Test Date: 02/21/13

DOOR OPENING WIDTH

Item	Description	Units	Pre-Test	Post-Test	Difference
A	Left Side Upper	mm	1006	994	12
B	Left Side Lower	mm	901	896	5
D	Right Side Upper	mm	1001	1001	0
E	Right Side Lower	mm	881	881	0

WHEELBASE MEASUREMENTS

Item	Description	Units	Pre-Test	Post-Test	Difference
C	Left Side Wheelbase	mm	2550	2540	10
F	Right Side Wheelbase	mm	2550	2495	55

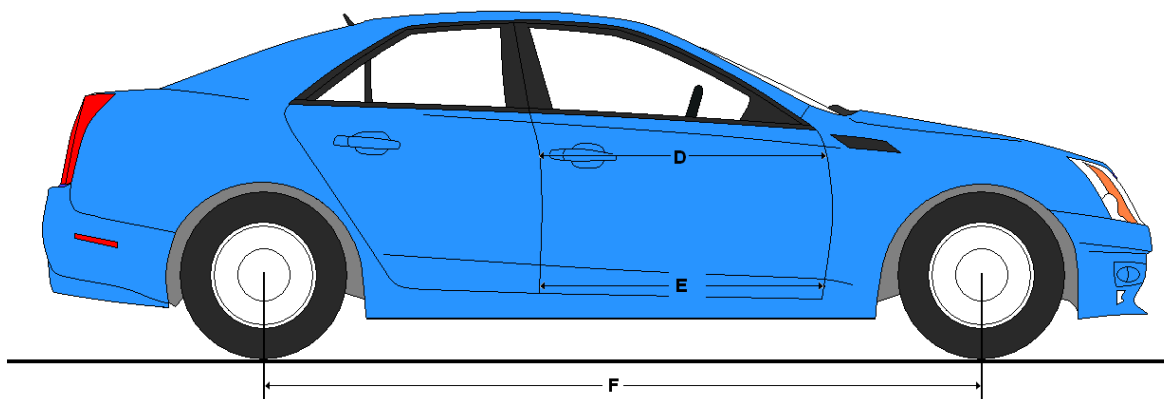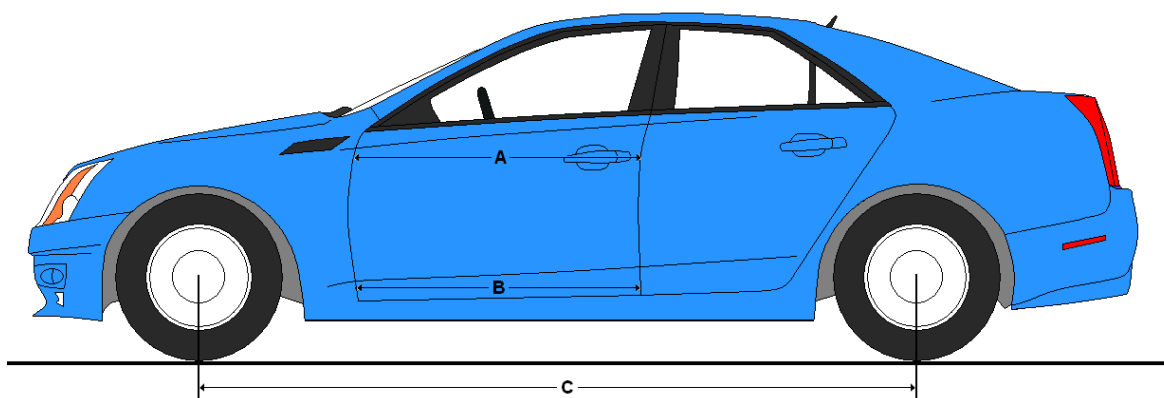


DATA SHEET NO. 14 ... (CONTINUED)
VEHICLE INTRUSION MEASUREMENTS

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback NHTSA No.: MD5109
 Test Program: 56 km/h Frontal Impact NCAP Test Test Date: 02/21/13

DRIVER COMPARTMENT INTRUSION

Item	Description	Units	Pre-Test	Post-Test	Difference
AB	Door Opening (Inside Window Jam)	mm	958	956	2
CX	Left Knee Bolster to X	mm	350	375	-25
DX	Right Knee Bolster to X	mm	370	380	-10
EX	Brake Pedal to X	mm	530	575	-45
FX	Foot Rest to X	mm	525	560	-35
GX	Center of Steering Wheel Hub to X	mm	75	130	-55

X = Front of Seat Track (Stationary)

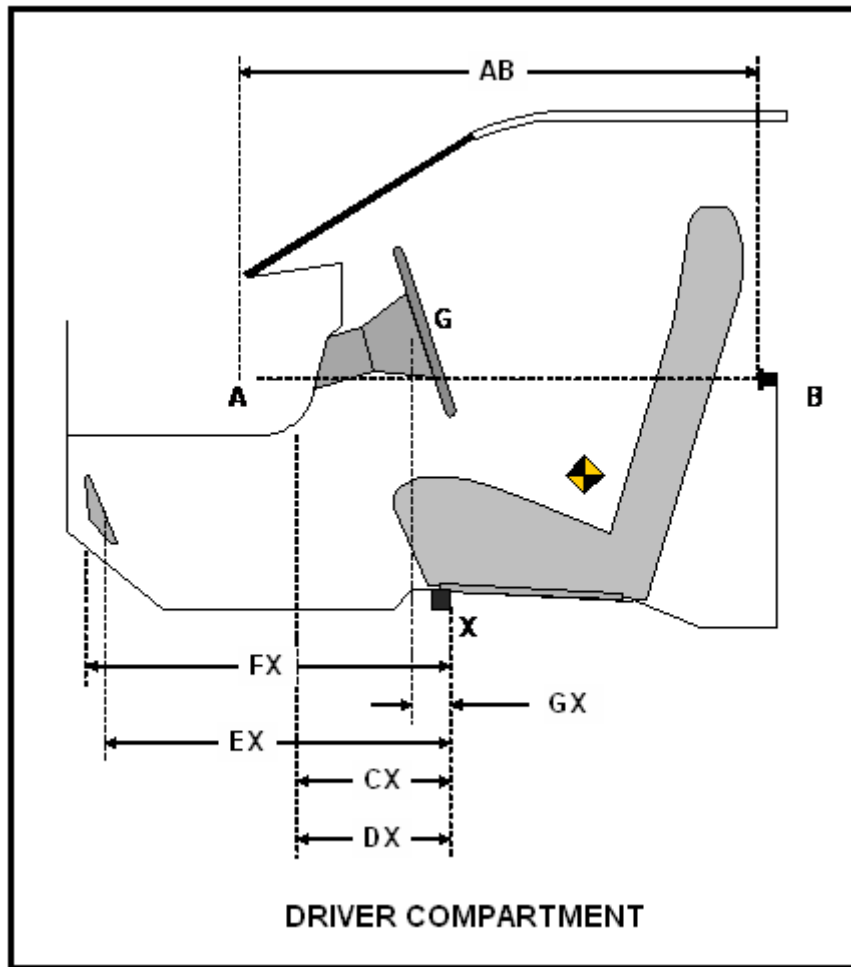

DATA SHEET NO. 15

SUMMARY OF FMVSS 212 AND 219 (PARTIAL) DATA

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback NHTSA No.: MD5109

Test Program: 56 km/h Frontal Impact NCAP Test Test Date: 02/21/13


Windshield Mounting Details: Windshield glass is secured to the vehicle frame with rubber cement.

The standard requires that the post-test retention measurement be a minimum of 75% of the pre-test total periphery measurement for vehicles not equipped with occupant passive restraints and 50% for each side of the windshield for vehicles which are equipped with occupant passive restraints.

Temperature of windshield molding during test: 21.1 ° C

WINDSHIELD PERIPHERY MEASUREMENTS

Measurement	Pre-Test (mm)	Post-Test (mm)	% Retention
Left Side	2143	2143	100.0%
Right Side	2143	2143	100.0%
Total	4286	4286	100.0%

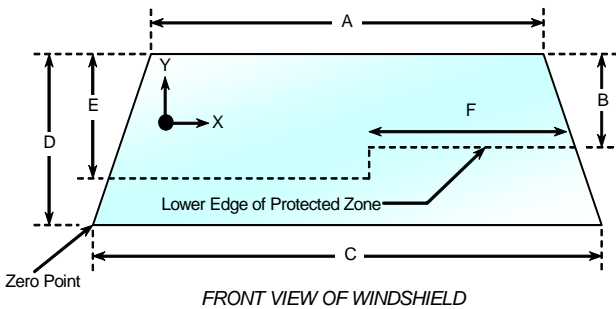

Item	Units	Value
A	mm	1090
B	mm	460
C	mm	1365
D	mm	915
E	mm	532
F	mm	553

AREAS OF PROTECTED ZONE FAILURES

A. Provide Coordinates of the area that the protected zone was penetrated more than 0.25 inches by a vehicle component other than one that is normally in contact with the windshield.

X	Y

B. Provide coordinates of the area beneath the protected zone that the inner surface of the windshield was penetrated by a vehicle component.

X	Y

DATA SHEET NO. 15 ... (CONTINUED)

SUMMARY OF FMVSS 212 AND 219 (PARTIAL) DATA

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback NHTSA No.: MD5109
Test Program: 56 km/h Frontal Impact NCAP Test Test Date: 02/21/13

FMVSS 301 FUEL SYSTEM INTEGRITY POST IMPACT DATA

Temperature at Time of Impact: 10.0° C Test Time: 1:30 PM

Stoddard Solvent Spillage Measurements

- A. From impact until vehicle motion ceases: 0 oz.
(Maximum allowable = 1 oz.)
- B. For the 5 minute period after motion ceases: 0 oz.
(Maximum allowable = 5 oz.)
- C. For the following 25 minutes: 0 oz.
(Maximum allowable = 1 oz./minute)
- D. Spillage: There was no Stoddard solvent spillage.


DATA SHEET NO. 16
FMVSS 301 STATIC ROLLOVER

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback

NHTSA No.: MD5109

Test Program: 56 km/h Frontal Impact NCAP Test

Test Date: 02/21/13

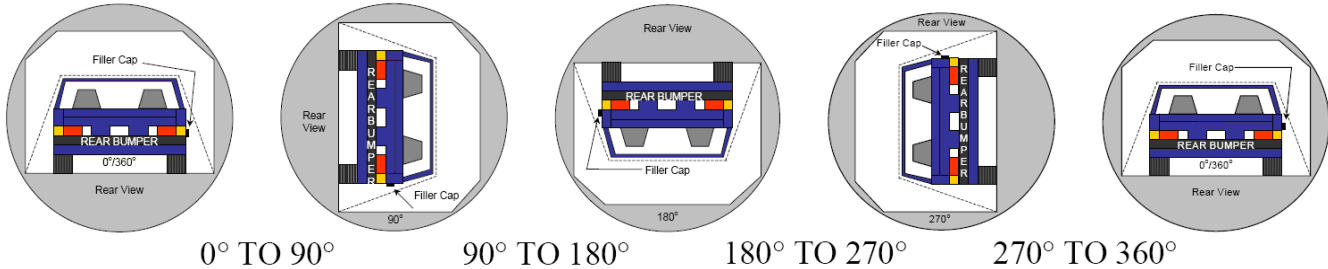

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.
2. The position hold time at each position is 300 seconds (minimum).
3. Details of Stoddard solvent spillage: There was no Stoddard solvent spillage.

SOLVENT COLLECTION TIME TABLE IN SECONDS

Test Phase	Rotation Time	Hold Time	Total Time
0° To 90°	83	300	383
90° To 180°	84	301	385
180° To 270°	78	300	378
270° To 360°	81	300	381

FMVSS 301 SPILLAGE TABLE

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° To 90°	0			
90° To 180°	0			
180° To 270°	0			
270° To 360°	0			

SOLVENT SPILLAGE LOCATION TABLE


Test Phase	Spillage Location
0° To 90°	
90° To 180°	
180° To 270°	
270° To 360°	

DATA SHEET NO. 17

DUMMY / VEHICLE TEMPERATURE STABILIZATION CHART

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback NHTSA No.: MD5109

Test Program: 56 km/h Frontal Impact NCAP Test Test Date: 02/21/13

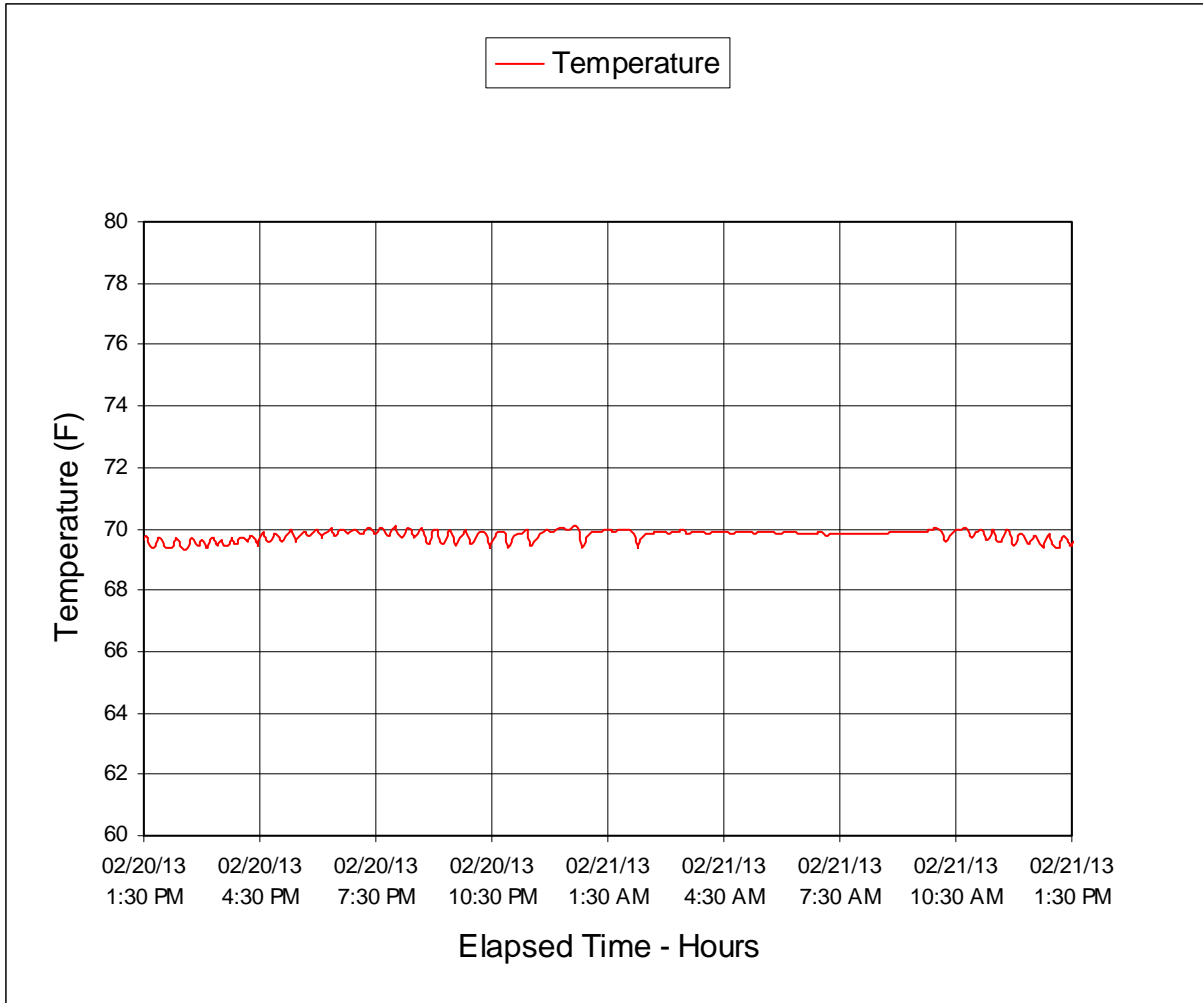

**APPENDIX A
PHOTOGRAPHS**

TABLE OF PHOTOGRAPHS

Figure		Page
1	Load Cell Location	A-1
2	Load Cell Wall	A-1
3	Manufacturer's Label	A-2
3a	Close-Up View of Vehicle's Reduced Load Carrying Capacity Label	A-2
4	Tire Placard	A-3
5	2013 Toyota Prius C Frontal as Delivered	A-3
6	Left Rear $\frac{3}{4}$ View, as Received	A-4
7	Pre-Test Front View of Test Vehicle	A-4
8	Post-Test Front View of Test Vehicle	A-5
9	Pre-Test Left View of Test Vehicle	A-5
10	Post-Test Left View of Test Vehicle	A-6
11	Pre-Test Right View of Test Vehicle	A-6
12	Post-Test Right View of Test Vehicle	A-7
13	Pre-Test Right Front $\frac{3}{4}$ View	A-7
14	Post-Test Right Front $\frac{3}{4}$ View	A-8
15	Pre-Test Left Rear $\frac{3}{4}$ View	A-8
16	Post-Test Left Rear $\frac{3}{4}$ View	A-9
17	Pre-Test Windshield View	A-9
18	Post-Test Windshield View	A-10
19	Pre-Test Engine Compartment View	A-10
20	Post-Test Engine Compartment View	A-11
21	Pre-Test Fuel Filler Cap View	A-11
22	Post-Test Fuel Filler Cap View	A-12
23	Pre-Test Front Underbody View	A-12
24	Post-Test Front Underbody View	A-13
25	Pre-Test Rear Underbody View	A-13
26	Post-Test Rear Underbody View	A-14
27	Pre-Test Dummy Cable Routing	A-14
28	Post-Test Dummy Cable Routing	A-15
29	Pre-Test Driver Dummy Front View	A-15
30	Post-Test Driver Dummy Front View	A-16
31	Pre-Test Driver Dummy Window View	A-16
32	Post-Test Driver Dummy Window View	A-17
33	Pre-Test Driver Dummy and Vehicle Interior View	A-17
34	Post-Test Driver Dummy and Vehicle Interior View	A-18

TABLE OF PHOTOGRAPHS ... (CONTINUED)

<u>Figure</u>		<u>Page</u>
35	Pre-Test Driver's Seat Fore-Aft Markings	A-18
36	Post-Test Driver's Seat Fore-Aft Markings	A-19
37	Pre-Test View of Belt Anchorage for Driver Dummy	A-19
38	Post-Test View of Belt Anchorage for Driver Dummy	A-20
39	Pre-Test Driver Dummy Feet	A-20
40	Post-Test Driver Dummy Feet	A-21
41	Pre-Test Driver's Side Knee Bolster	A-21
42	Post-Test Driver's Side Knee Bolster	A-22
43	Pre-Test Driver's Side Floorpan	A-22
44	Post-Test Driver's Side Floorpan	A-23
45	Post-Test Driver Dummy Face	A-23
46	Post-Test Driver Dummy Contact With Airbag	A-24
47	Post-Test Driver Dummy Contact With Headrest	A-24
47a	Post-Test Driver Dummy Contact With Knee Airbag	A-25
47b	Post-Test Driver Dummy Contact With Headliner	A-25
48	Pre-Test View of the Steering Wheel	A-26
49	Post-Test View of the Steering Wheel	A-26
50	Pre-Test Passenger Dummy Front View	A-27
51	Post-Test Passenger Dummy Front View	A-27
52	Pre-Test Passenger Dummy Window View	A-28
53	Post-Test Passenger Dummy Window View	A-28
54	Pre-Test Passenger Dummy and Vehicle Interior View	A-29
55	Post-Test Passenger Dummy and Vehicle Interior View	A-29
56	Pre-Test Passenger's Seat Fore-Aft Markings	A-30
57	Post-Test Passenger's Seat Fore-Aft Markings	A-30
58	Pre-Test View of Belt Anchorage for Passenger Dummy	A-31
59	Post-Test View of Belt Anchorage for Passenger Dummy	A-31
60	Pre-Test Passenger Dummy Feet	A-32
61	Post-Test Passenger Dummy Feet	A-32
62	Pre-Test Passenger's Side Knee Bolster	A-33
63	Post-Test Passenger's Side Knee Bolster	A-33
64	Pre-Test Passenger's Side Floorpan	A-34
65	Post-Test Passenger's Side Floorpan	A-34
66	Post-Test Passenger Dummy Contact With Airbag	A-35
66a	Post-Test Passenger Dummy Contact With Headrest	A-35

TABLE OF PHOTOGRAPHS ... (CONTINUED)

<u>Figure</u>		<u>Page</u>
66b	Post-Test Passenger Dummy Contact With Glovebox	A-36
67	Photograph of Ballast Installed in Vehicle	A-36
68	Post-Test Stoddard Solvent Spillage Location View	A-37
69	Post-Test Speed Trap Read-Out	A-37
70	Vehicle at 0° on Static Rollover Device	A-38
71	Vehicle at 90° on Static Rollover Device	A-38
72	Vehicle at 180° on Static Rollover Device	A-39
73	Vehicle at 270° on Static Rollover Device	A-39
74	Vehicle at 360° on Static Rollover Device	A-40
75	2013 Toyota Prius C Frontal Impact Event	A-40
76	Monroney Label Photograph	A-41



FIGURE 1. Load Cell Location



FIGURE 2. Load Cell Wall

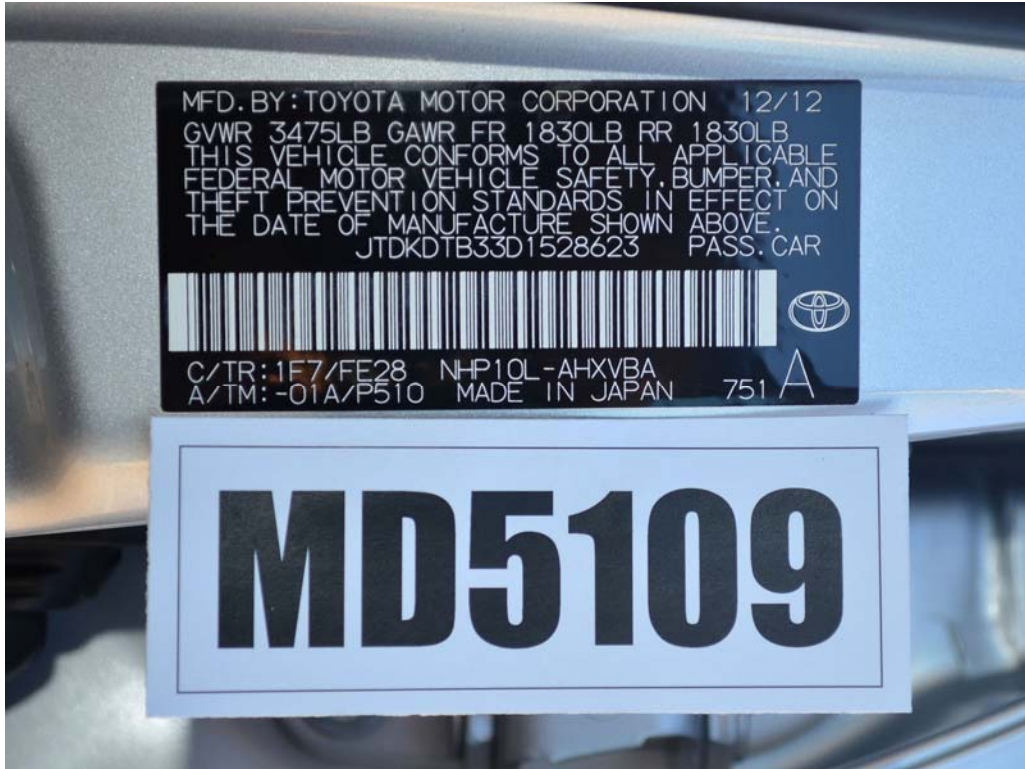


FIGURE 3. Manufacturer's Label



FIGURE 3a. Close-Up View of Vehicle's Reduced Load Carrying Capacity Label

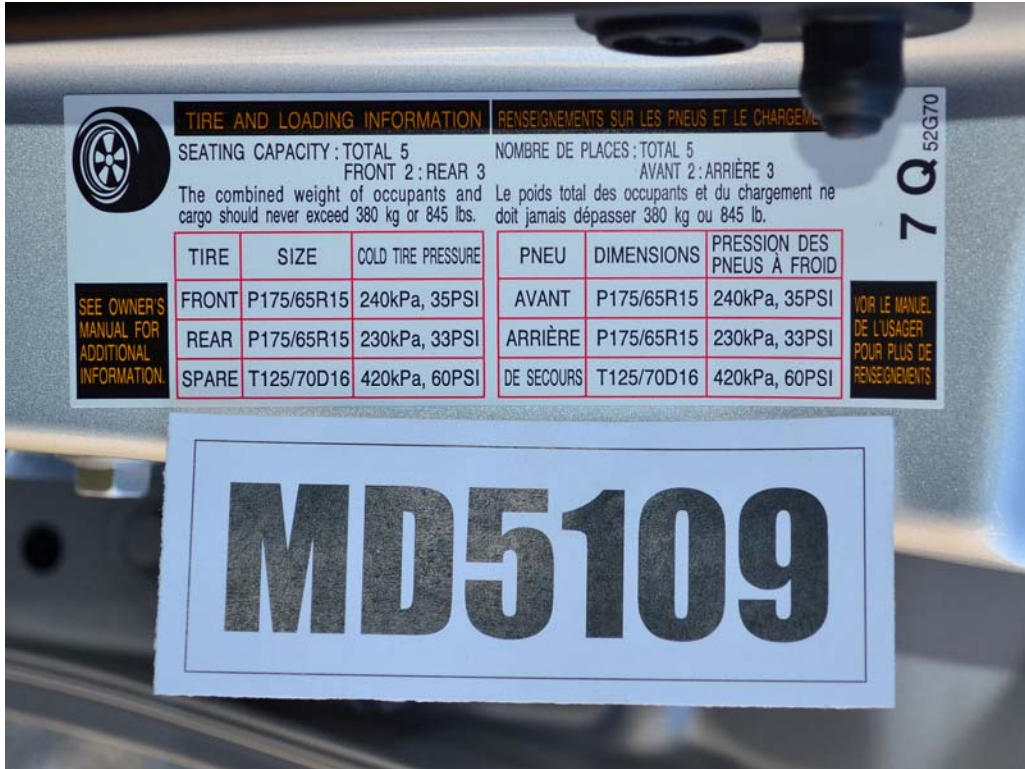


FIGURE 4. Tire Placard



FIGURE 5. 2013 Toyota Prius C Frontal As Delivered



FIGURE 6. Left Rear $\frac{3}{4}$ View, As Received



FIGURE 7. Pre-Test Front View of Test Vehicle



FIGURE 8. Post-Test Front View of Test Vehicle



FIGURE 9. Pre-Test Left View of Test Vehicle



FIGURE 10. Post-Test Left View of Test Vehicle



FIGURE 11. Pre-Test Right View of Test Vehicle



FIGURE 12. Post-Test Right View of Test Vehicle



FIGURE 13. Pre-Test Right Front ¼ View



FIGURE 14. Post-Test Right Front $\frac{3}{4}$ View



FIGURE 15. Pre-Test Left Rear $\frac{3}{4}$ View



FIGURE 16. Post-Test Left Rear $\frac{3}{4}$ View

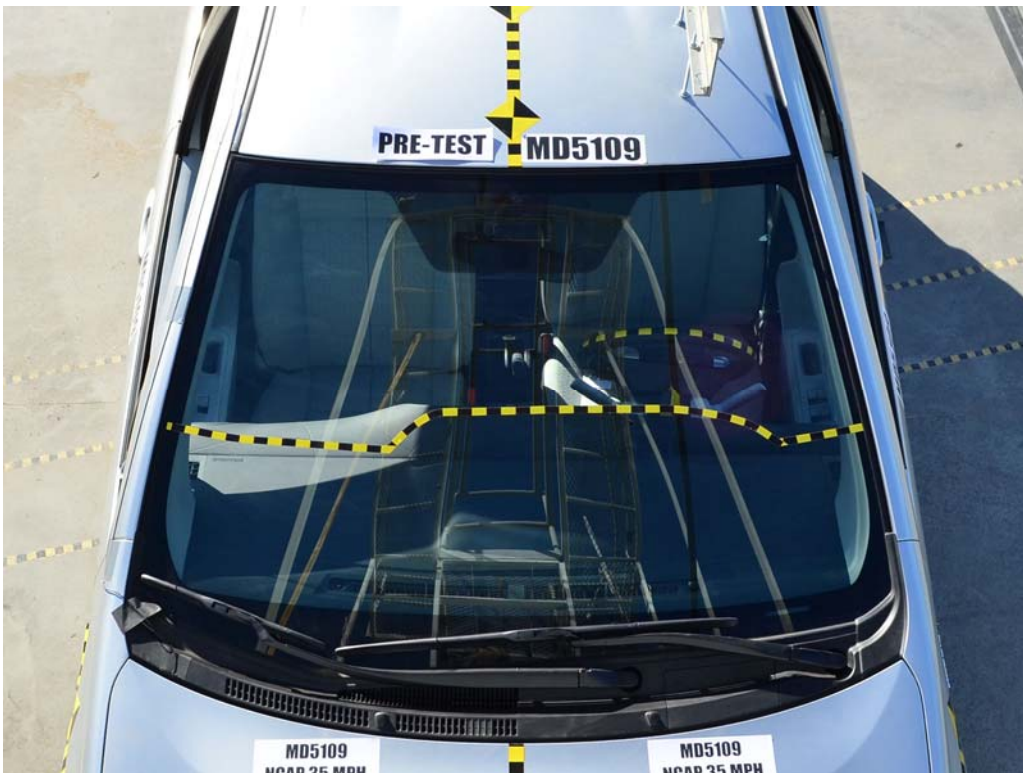


FIGURE 17. Pre-Test Windshield View



FIGURE 18. Post-Test Windshield View



FIGURE 19. Pre-Test Engine Compartment View



FIGURE 20. Post-Test Engine Compartment View



FIGURE 21. Pre-Test Fuel Filler Cap View



FIGURE 22. Post-Test Fuel Filler Cap View

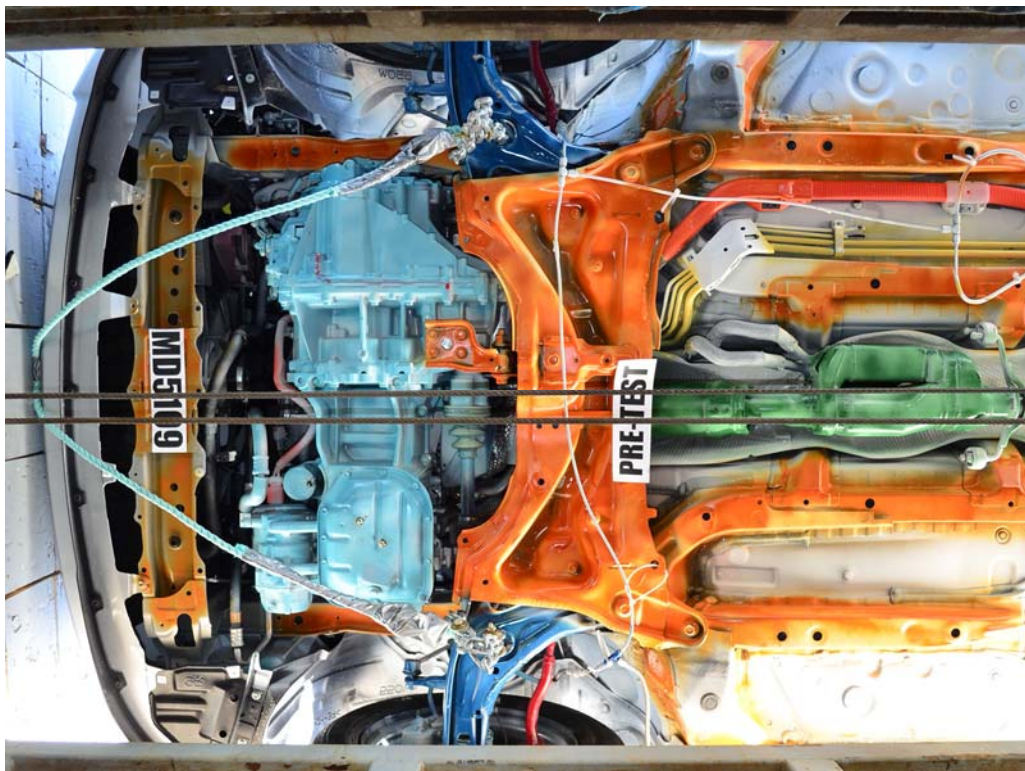


FIGURE 23. Pre-Test Front Underbody View

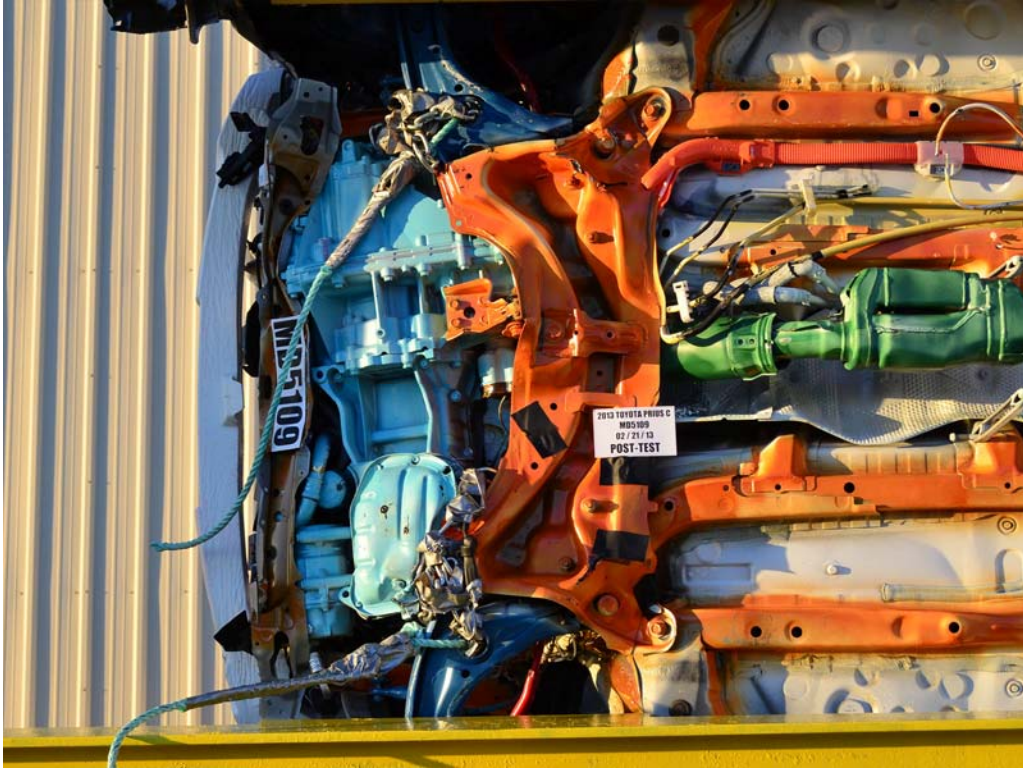


FIGURE 24. Post-Test Front Underbody View

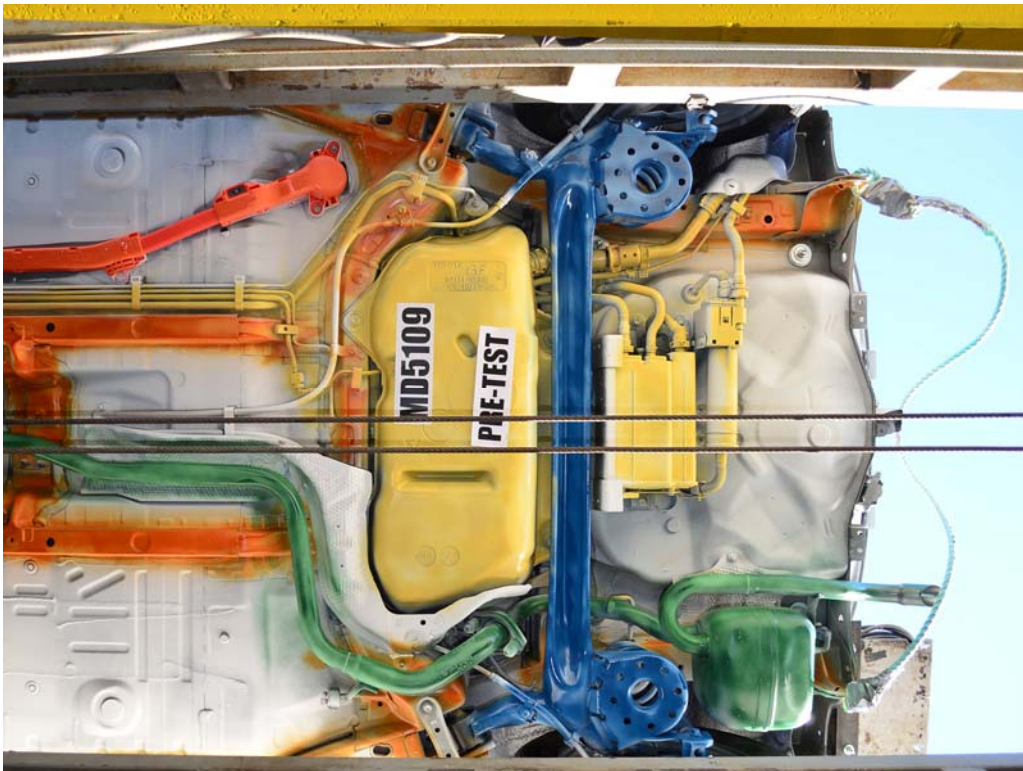


FIGURE 25. Pre-Test Rear Underbody View



FIGURE 26. Post-Test Rear Underbody View

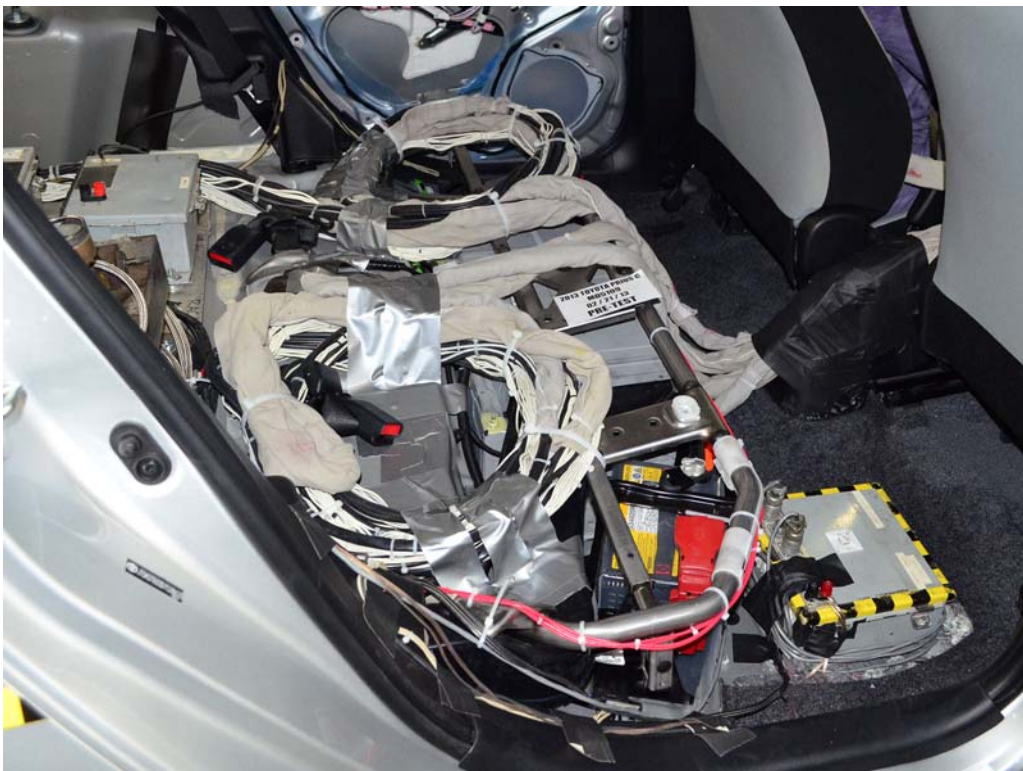


FIGURE 27. Pre-Test Dummy Cable Routing



FIGURE 28. Post-Test Dummy Cable Routing



FIGURE 29. Pre-Test Driver Dummy Front View



FIGURE 30. Post-Test Driver Dummy Front View



FIGURE 31. Pre-Test Driver Dummy Window View



FIGURE 32. Post-Test Driver Dummy Window View



FIGURE 33. Pre-Test Driver Dummy and Vehicle Interior View



FIGURE 34. Post-Test Driver Dummy and Vehicle Interior View



FIGURE 35. Pre-Test Driver's Seat Fore-Aft Markings

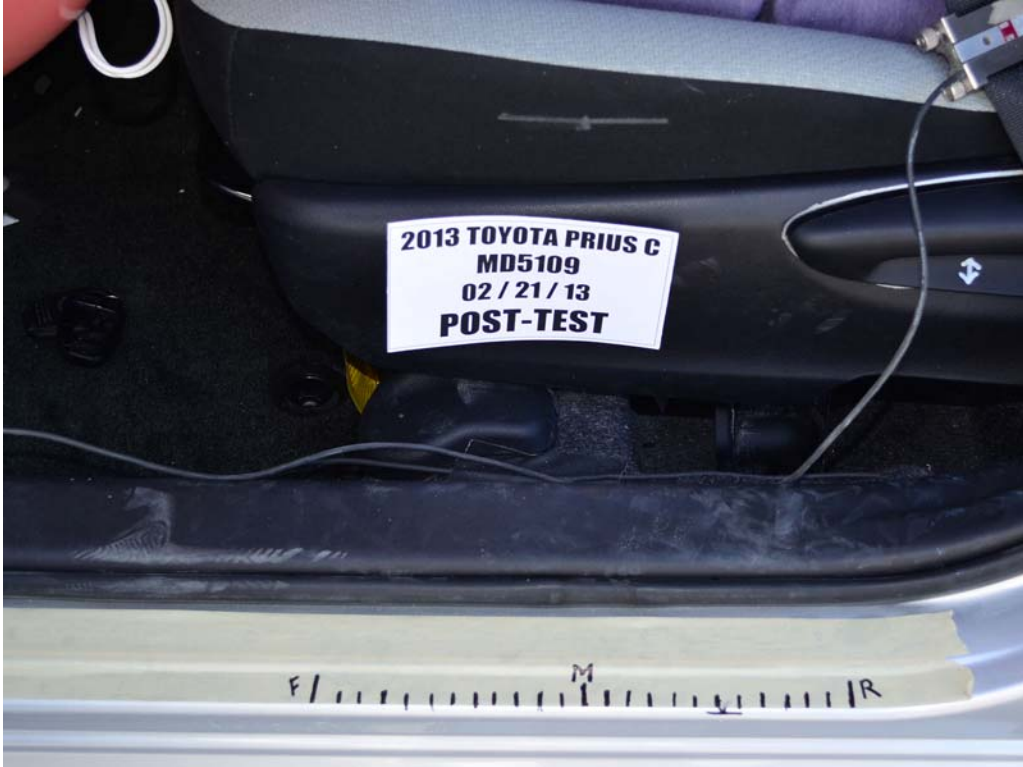


FIGURE 36. Post-Test Driver's Seat Fore-Aft Markings

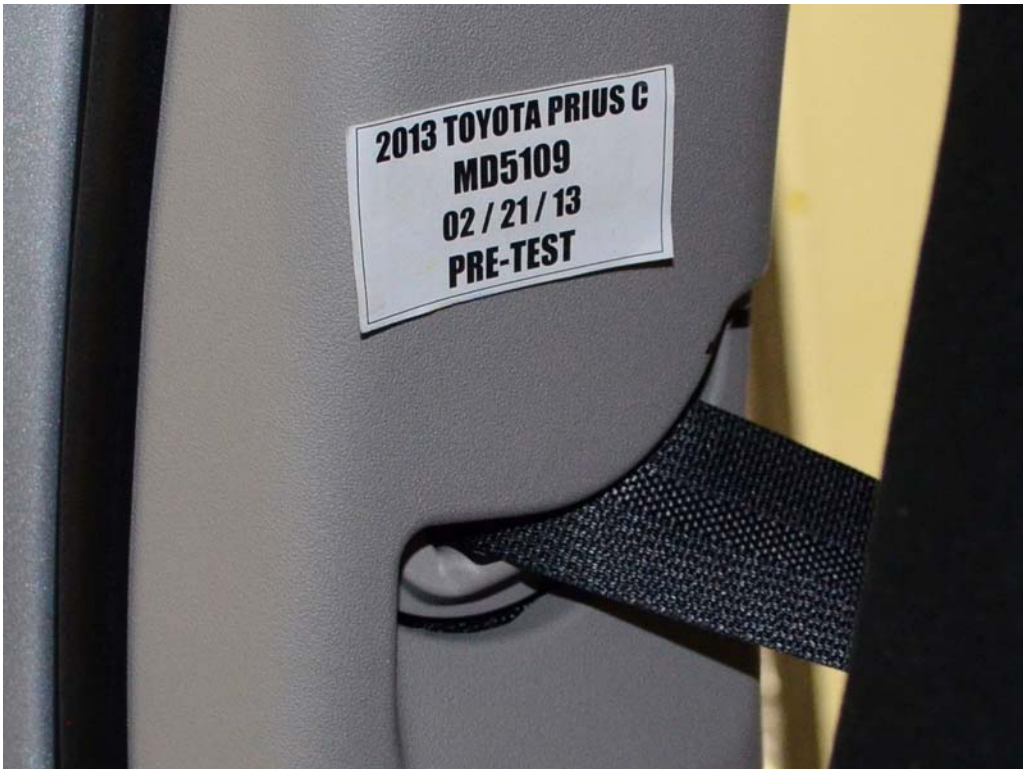


FIGURE 37. Pre-Test View of Belt Anchorage for Driver Dummy

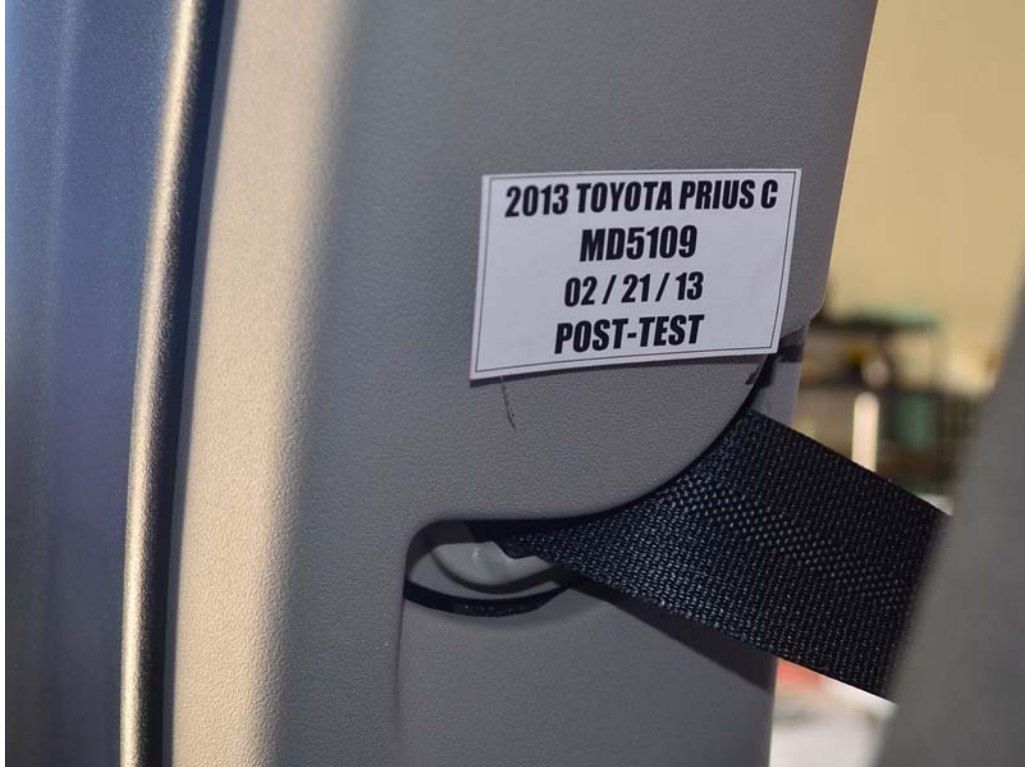


FIGURE 38. Post-Test View of Belt Anchorage for Driver Dummy



FIGURE 39. Pre-Test Driver Dummy Feet



FIGURE 40. Post-Test Driver Dummy Feet



FIGURE 41. Pre-Test Driver's Side Knee Bolster



FIGURE 42. Post-Test Driver's Side Knee Bolster



FIGURE 43. Pre-Test Driver's Side Floorpan



FIGURE 44. Post-Test Driver's Side Floorpan



FIGURE 45. Post-Test Driver Dummy Face

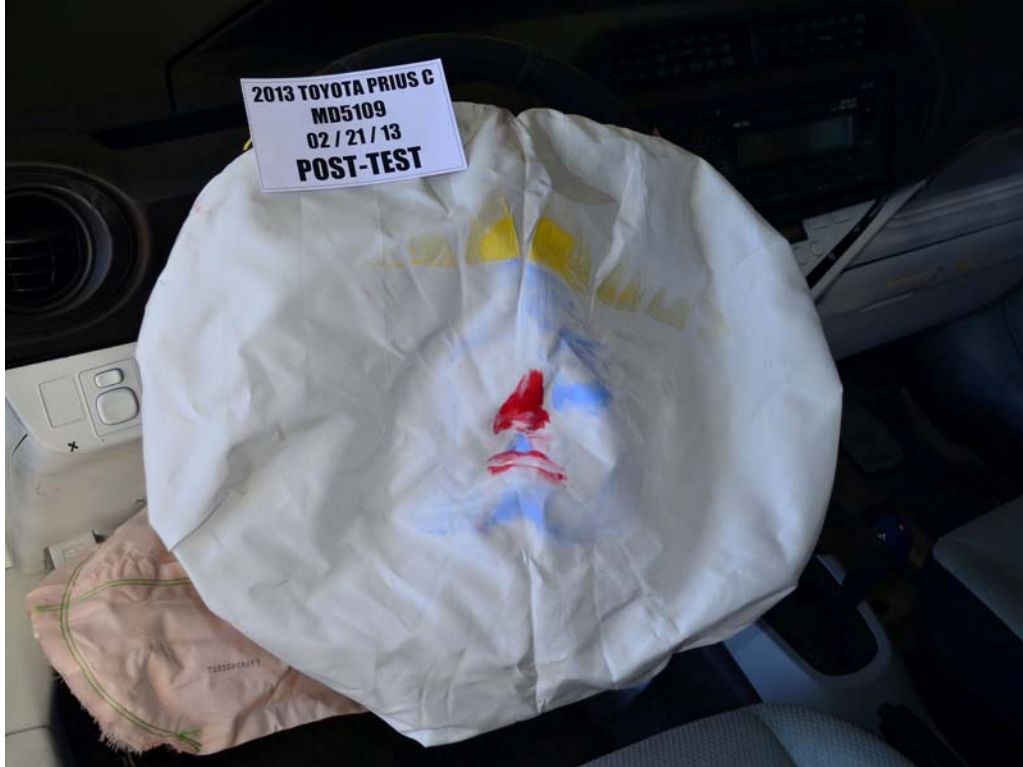


FIGURE 46. Post-Test Driver Dummy Contact With Airbag

Photograph Not Applicable

No Driver Dummy Contact
with Headrest

FIGURE 47. Post-Test Driver Dummy Contact With Headrest



FIGURE 47a. Post-Test Driver Dummy Contact With Knee Airbag



FIGURE 47b. Post-Test Driver Dummy Contact With Headliner



FIGURE 48. Pre-Test View of the Steering Wheel



FIGURE 49. Post-Test View of the Steering Wheel



FIGURE 50. Pre-Test Passenger Dummy Front View



FIGURE 51. Post-Test Passenger Dummy Front View



FIGURE 52. Pre-Test Passenger Dummy Window View



FIGURE 53. Post-Test Passenger Dummy Window View



FIGURE 54. Pre-Test Passenger Dummy and Vehicle Interior View



FIGURE 55. Post-Test Passenger Dummy and Vehicle Interior View



FIGURE 56. Pre-Test Passenger's Seat Fore-Aft Markings



FIGURE 57. Post-Test Passenger's Seat Fore-Aft Markings

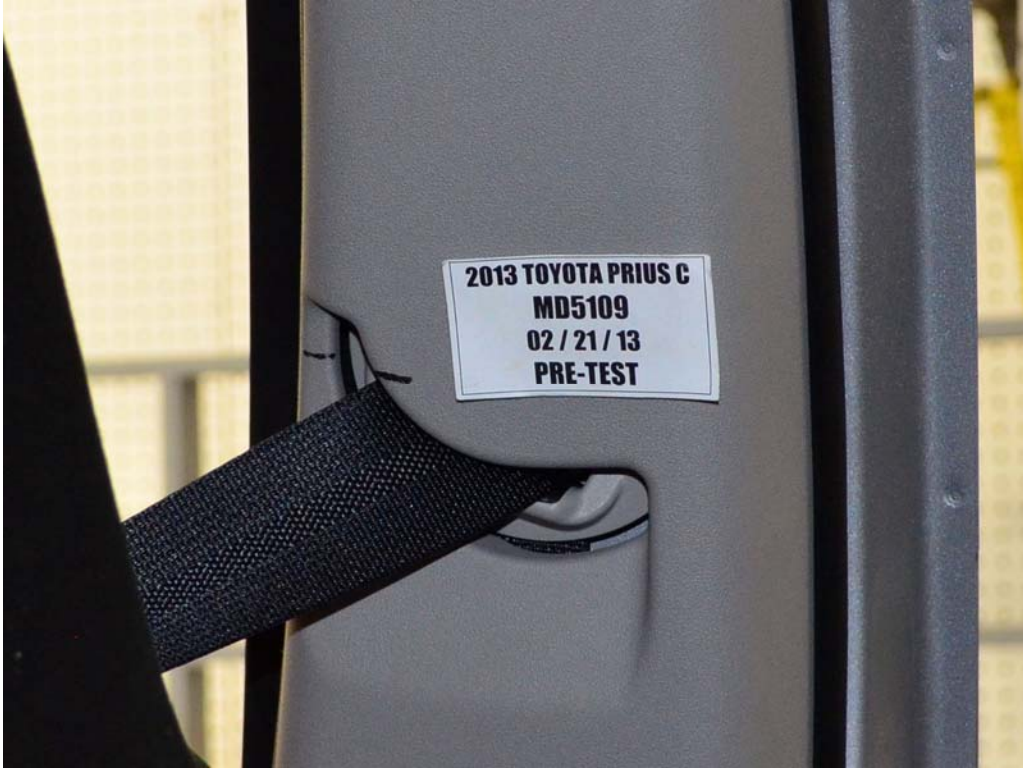


FIGURE 58. Pre-Test View of Belt Anchorage for Passenger Dummy



FIGURE 59. Post-Test View of Belt Anchorage for Passenger Dummy

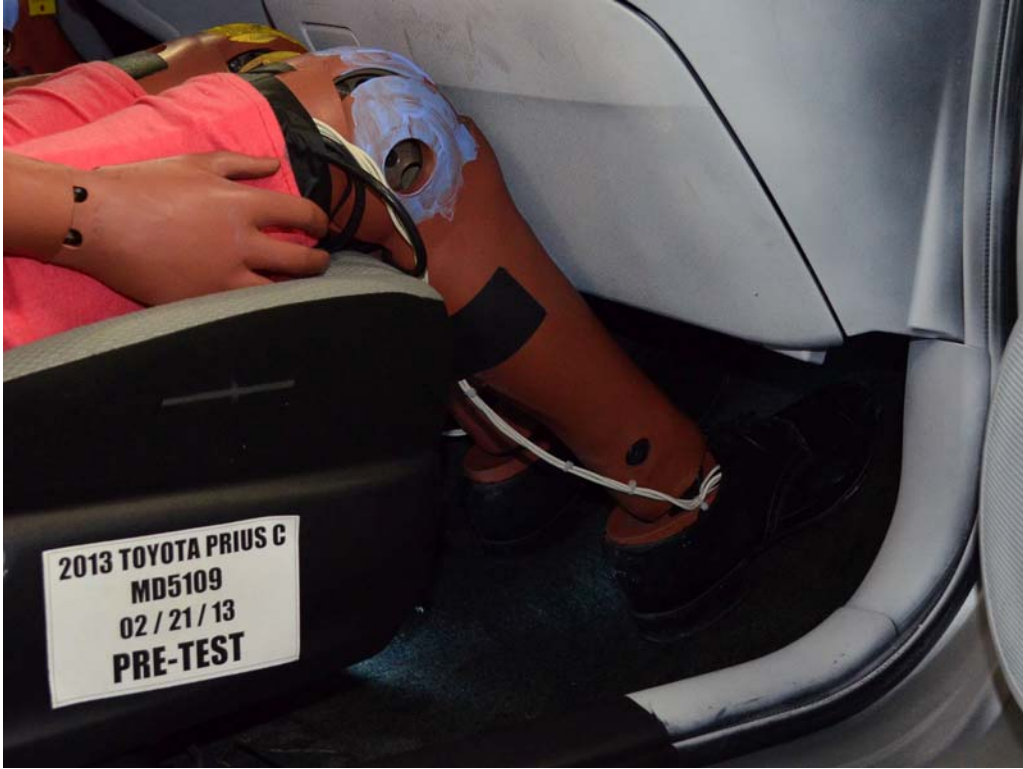


FIGURE 60. Pre-Test Passenger Dummy Feet



FIGURE 61. Post-Test Passenger Dummy Feet



FIGURE 62. Pre-Test Passenger's Side Knee Bolster



FIGURE 63. Post-Test Passenger's Side Knee Bolster



FIGURE 64. Pre-Test Passenger's Side Floorpan



FIGURE 65. Post-Test Passenger's Side Floorpan



FIGURE 66. Post-Test Passenger Dummy Contact With Airbag



FIGURE 66a. Post-Test Passenger Dummy Contact With Headrest



FIGURE 66b. Post-Test Passenger Dummy Contact With Glovebox



FIGURE 67. Photograph of Ballast Installed In Vehicle

Photograph Not Applicable

No Stoddard Solvent Leakage

FIGURE 68. Post-Test Stoddard Solvent Spillage Location View



FIGURE 69. Post-Test Speed Trap Read-Out

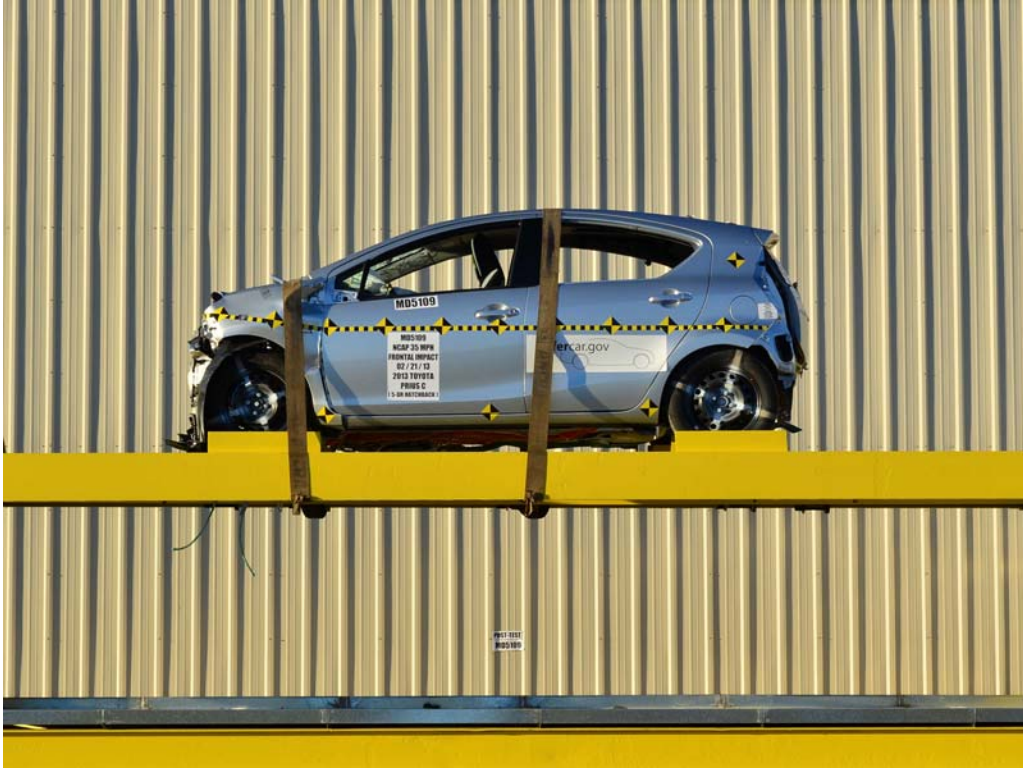


FIGURE 70. Vehicle at 0° on Static Rollover Device

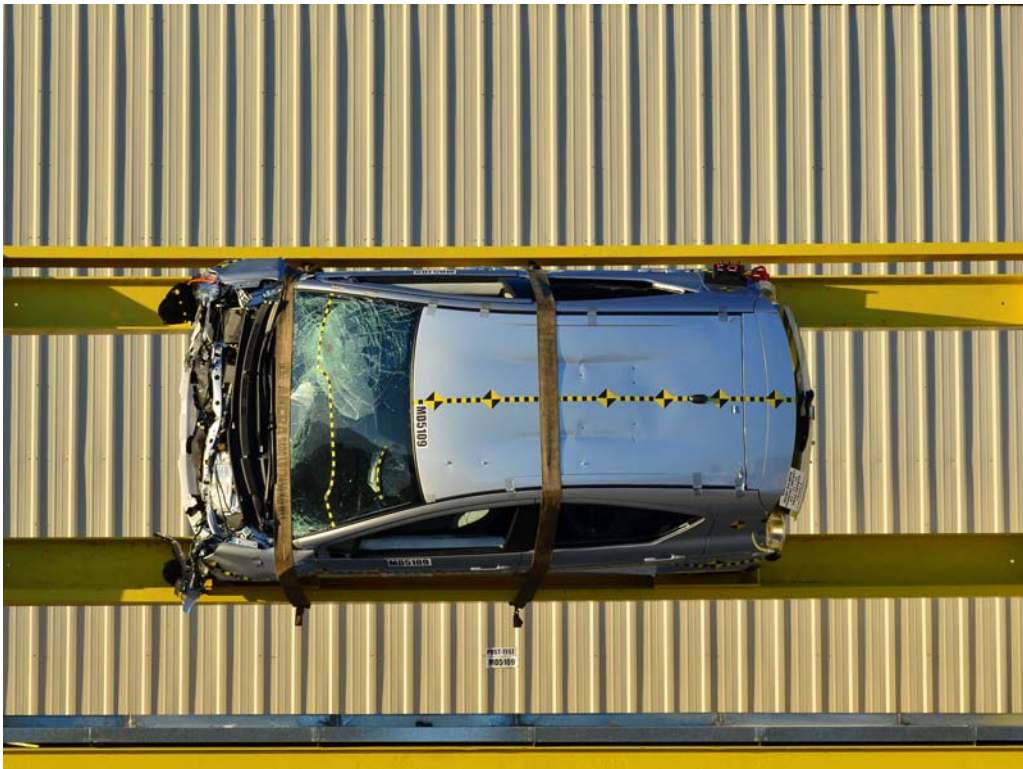


FIGURE 71. Vehicle at 90° on Static Rollover Device



FIGURE 72. Vehicle at 180° on Static Rollover Device

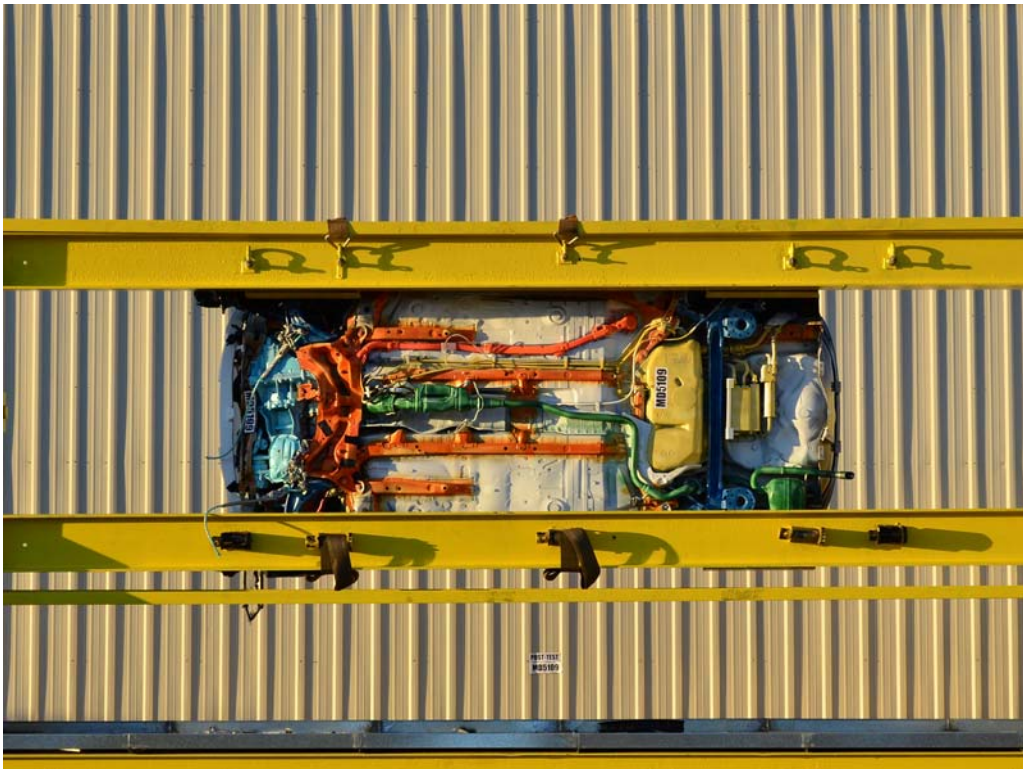


FIGURE 73. 2013 Vehicle at 270° on Static Rollover Device

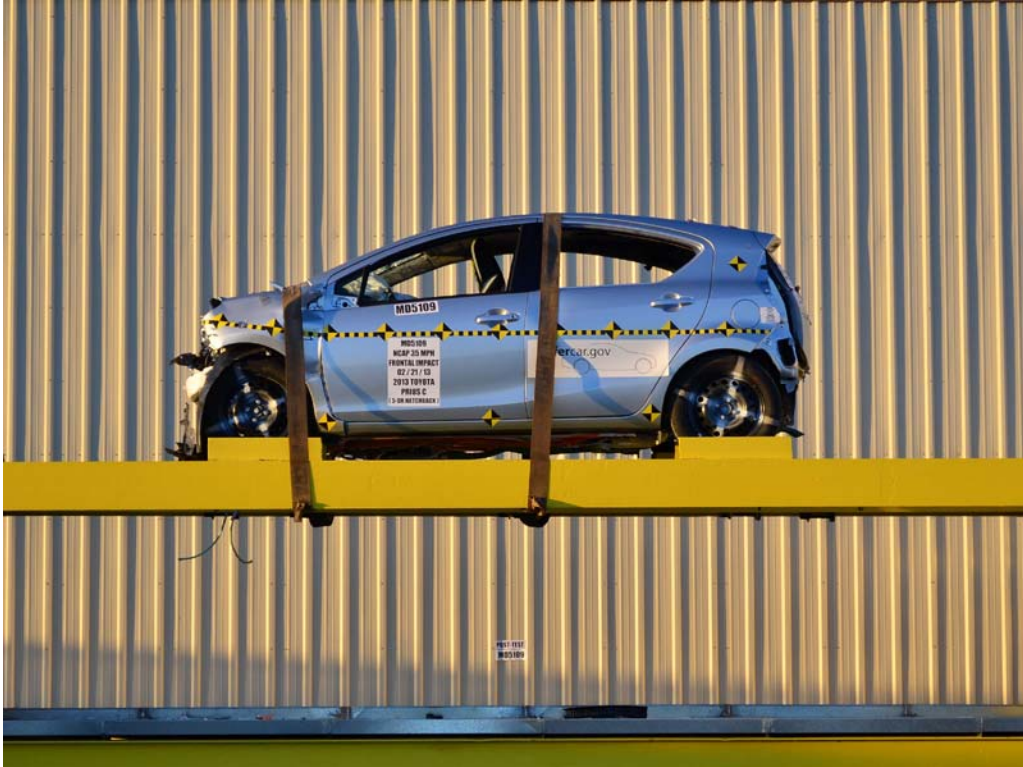


FIGURE 74. Vehicle at 360° on Static Rollover Device



FIGURE 75. 2013 Toyota Prius C Frontal Impact Event

APPENDIX B
DUMMY RESPONSE DATA TRACES

TABLE OF DATA PLOTS

<u>Plot</u>		<u>Page</u>
1	Driver Head X Acceleration vs. Time Primary	B-1
2	Driver Head Y Acceleration vs. Time Primary	B-1
3	Driver Head Z Acceleration vs. Time Primary	B-1
4	Driver Head Resultant Acceleration vs. Time Primary	B-1
5	Driver Chest X Deflection vs. Time	B-2
6	Driver Chest X Acceleration vs. Time Primary	B-3
7	Driver Chest Y Acceleration vs. Time Primary	B-3
8	Driver Chest Z Acceleration vs. Time Primary	B-3
9	Driver Chest Resultant Acceleration vs. Time Primary	B-3
10	Driver Upper Neck Force X vs. Time Primary	B-4
11	Driver Upper Neck Force Z vs. Time Primary	B-4
12	Driver Upper Neck Moment Y vs. Time Primary	B-4
13	Driver Nij vs. Time Primary	B-4
14	Driver Left Femur Force vs. Time	B-5
15	Driver Right Femur Force vs. Time	B-5
16	Passenger Head X Acceleration vs. Time Primary	B-6
17	Passenger Head Y Acceleration vs. Time Primary	B-6
18	Passenger Head Z Acceleration vs. Time Primary	B-6
19	Passenger Head Resultant Acceleration vs. Time Primary	B-6
20	Passenger Chest X Deflection vs. Time	B-7
21	Passenger Chest X Acceleration vs. Time Primary	B-8
22	Passenger Chest Y Acceleration vs. Time Primary	B-8
23	Passenger Chest Z Acceleration vs. Time Primary	B-8
24	Passenger Chest Resultant Acceleration vs. Time Primary	B-8
25	Passenger Upper Neck Force X vs. Time Primary	B-9
26	Passenger Upper Neck Force Z vs. Time Primary	B-9
27	Passenger Upper Neck Moment Y vs. Time Primary	B-9
28	Passenger Nij vs. Time Primary	B-9
29	Passenger Left Femur Force vs. Time	B-10
30	Passenger Right Femur Force vs. Time	B-10

The following additional dummy and vehicle response data can be found in the R&D section of the NHTSA website at www.nhtsa.dot.gov


Driver Head X Acceleration Redundant
Driver Head Y Acceleration Redundant
Driver Head Z Acceleration Redundant
Driver Head Front Y Acceleration
Driver Head Front Z Acceleration
Driver Head Top X Acceleration
Driver Head Top Y Acceleration
Driver Head Left X Acceleration
Driver Head Left Z Acceleration
Driver Upper Neck Force Y
Driver Upper Neck Moment X
Driver Upper Neck Moment Z
Driver Chest X Acceleration Redundant
Driver Chest Y Acceleration Redundant
Driver Chest Z Acceleration Redundant
Driver Pelvis X
Driver Pelvis Y
Driver Pelvis Z
Driver Left Femur Force Z Redundant
Driver Right Femur Force Z Redundant
Driver Shoulder Belt Force
Driver Lap Belt Force
Driver Left Upper Tibia Moment X
Driver Left Upper Tibia Moment Y
Driver Left Upper Tibia Force Z
Driver Left Lower Tibia Moment X
Driver Left Lower Tibia Moment Y
Driver Left Lower Tibia Force Z
Driver Right Upper Tibia Moment X
Driver Right Upper Tibia Moment Y
Driver Right Upper Tibia Force Z
Driver Right Lower Tibia Moment X
Driver Right Lower Tibia Moment Y

Driver Right Lower Tibia Force Z
Driver Left Foot Fore Z
Driver Left Foot Aft X
Driver Left Foot Aft Z
Driver Right Foot Fore Z
Driver Right Foot Aft X
Driver Right Foot Aft Z
Passenger Head X Acceleration Redundant
Passenger Head Y Acceleration Redundant
Passenger Head Z Acceleration Redundant
Passenger Head Front Y Acceleration
Passenger Head Front Z Acceleration
Passenger Head Top X Acceleration
Passenger Head Top Y Acceleration
Passenger Head Left X Acceleration
Passenger Head Left Z Acceleration
Passenger Upper Neck Force X
Passenger Upper Neck Force Z
Passenger Upper Neck Moment Y
Passenger Chest X Acceleration Redundant
Passenger Chest Y Acceleration Redundant
Passenger Chest Z Acceleration Redundant
Passenger Pelvis X
Passenger Pelvis Y
Passenger Pelvis Z
Passenger Left Femur Force Z Redundant
Passenger Right Femur Force Z Redundant
Passenger Shoulder Belt Force
Passenger Lap Belt Force
Passenger Left Upper Tibia Moment X
Passenger Left Upper Tibia Moment Y
Passenger Left Upper Tibia Force Z
Passenger Left Lower Tibia Moment X
Passenger Left Lower Tibia Moment Y
Passenger Left Lower Tibia Force Z
Passenger Right Upper Tibia Moment X


Passenger Right Upper Tibia Moment Y
Passenger Right Upper Tibia Force Z
Passenger Right Lower Tibia Moment X
Passenger Right Lower Tibia Moment Y
Passenger Right Lower Tibia Force Z
Passenger Left Foot Fore Z
Passenger Left Foot Aft X
Passenger Left Foot Aft Z
Passenger Right Foot Fore Z
Passenger Right Foot Aft X
Passenger Right Foot Aft Z
Left Rear Seat Crossmember X
Left Rear Seat Crossmember Z
Right Rear Seat Crossmember X
Right Rear Seat Crossmember Z
Vehicle Engine Top X
Vehicle Engine Bottom X
Vehicle Left Rear Z
Vehicle Right Rear Z
Load Cell Barrier A1-A9
Load Cell Barrier B1-B9
Load Cell Barrier C1-C9
Load Cell Barrier D1-D9

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback
 Test Program: 56 km/h Frontal Impact NCAP Test


NHTSA No.: MD5109
 Test Date: 2/21/13

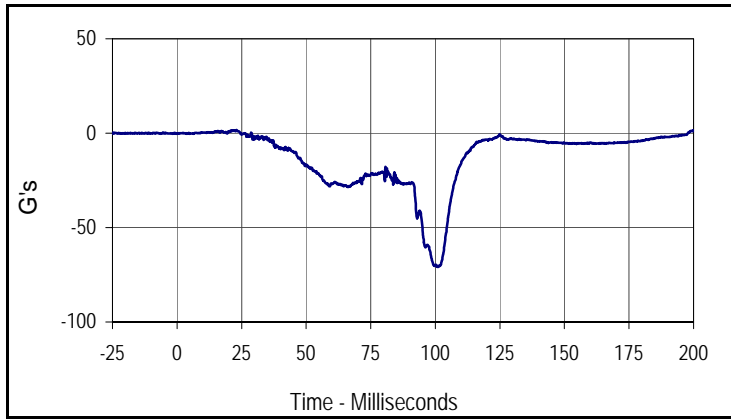


Curve Description			
Driver Head Acceleration X Primary			
Plot No.	Type	SAE Class	Units
001	FIL	1000	G's
Max	Time	Min	Time
1.7	23.1	-70.9	101.0

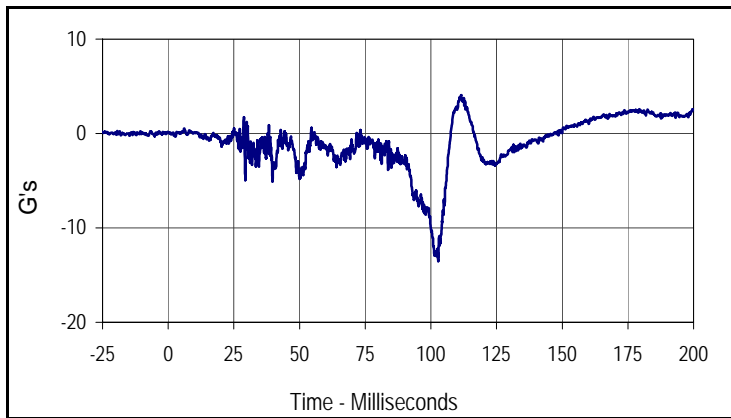

Curve Description			
Driver Head Acceleration Y Primary			
Plot No.	Type	SAE Class	Units
002	FIL	1000	G's
Max	Time	Min	Time
4.1	111.5	-13.5	102.8

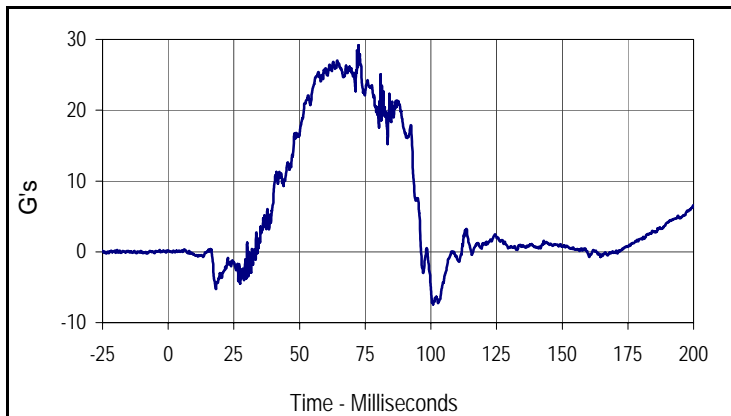


Curve Description			
Driver Head Acceleration Z Primary			
Plot No.	Type	SAE Class	Units
003	FIL	1000	G's
Max	Time	Min	Time
29.2	72.4	-7.4	100.8

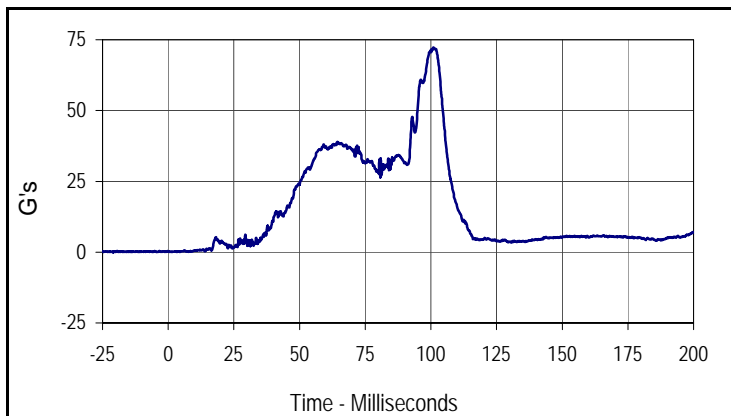

Curve Description			
Driver Head Resultant Acceleration Primary			
Plot No.	Type	SAE Class	Units
004	RES	1000	G's
Max	Time	Min	Time
72.3	101.0	0.0	1.7

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback
 Test Program: 56 km/h Frontal Impact NCAP Test


NHTSA No.: MD5109
 Test Date: 2/21/13

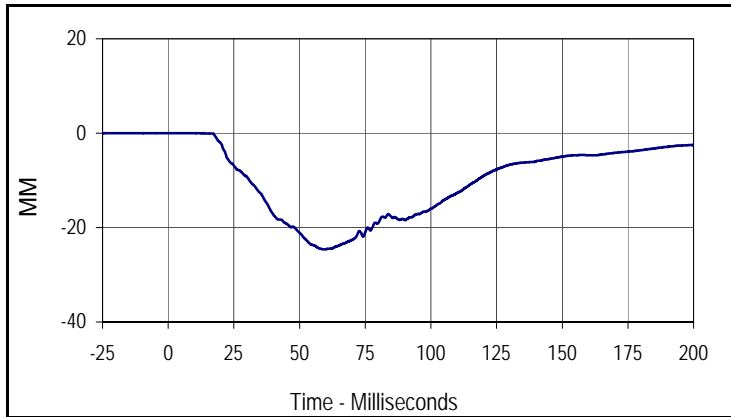


Curve Description			
Driver Chest Deflection			
Plot No.	Type	SAE Class	Units
005	FIL	600	MM
Max	Time	Min	Time
0.0	5.0	-24.6	59.5

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback
 Test Program: 56 km/h Frontal Impact NCAP Test


NHTSA No.: MD5109
 Test Date: 2/21/13

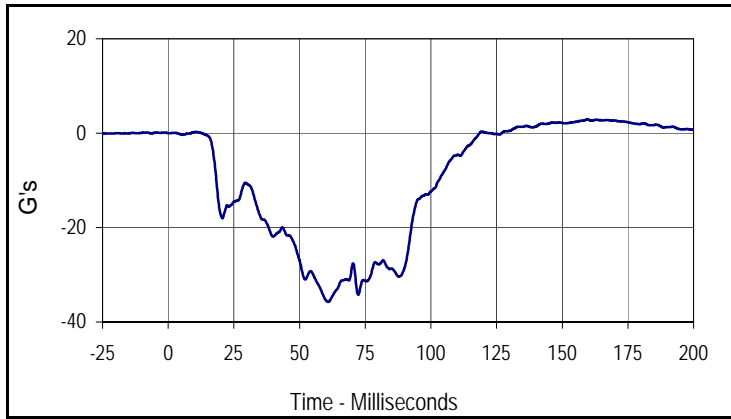


Curve Description			
Driver Chest Acceleration X Primary			
Plot No.	Type	SAE Class	Units
006	FIL	180	G's
Max	Time	Min	Time
3.0	159.7	-35.7	60.9

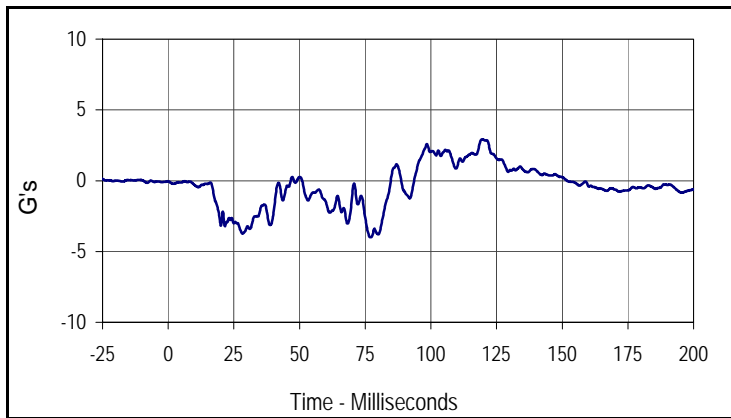

Curve Description			
Driver Chest Acceleration Y Primary			
Plot No.	Type	SAE Class	Units
007	FIL	180	G's
Max	Time	Min	Time
2.9	119.5	-4.0	76.8

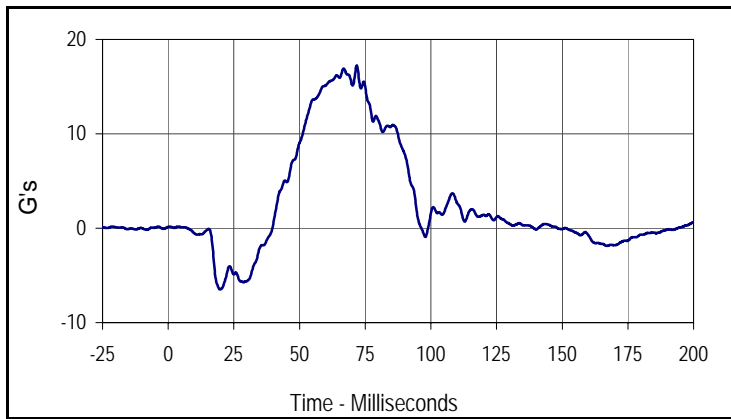


Curve Description			
Driver Chest Acceleration Z Primary			
Plot No.	Type	SAE Class	Units
008	FIL	180	G's
Max	Time	Min	Time
17.2	71.8	-6.5	19.6

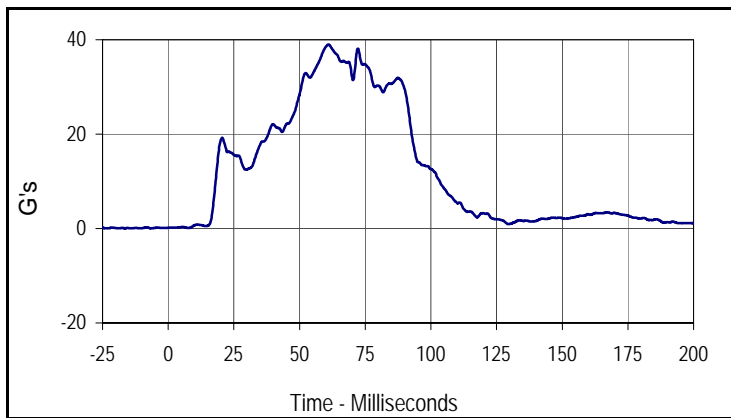


Curve Description			
Driver Chest Resultant Acceleration Primary			
Plot No.	Type	SAE Class	Units
009	RES	180	G's
Max	Time	Min	Time
39.0	61.1	0.1	7.6

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback
 Test Program: 56 km/h Frontal Impact NCAP Test


NHTSA No.: MD5109
 Test Date: 2/21/13

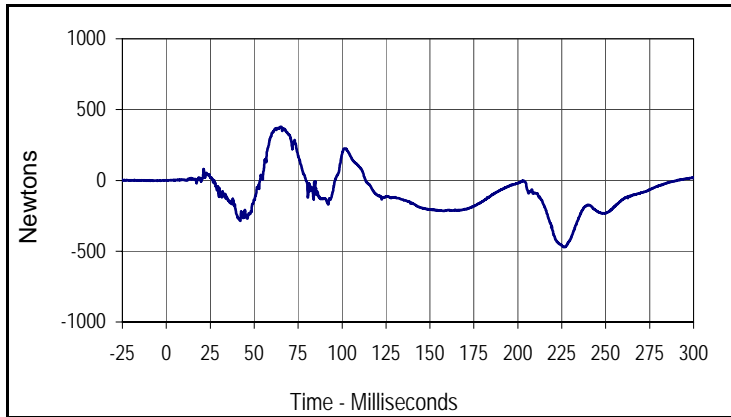


Curve Description			
Driver Upper Neck Force X			
Plot No.	Type	SAE Class	Units
010	FIL	1000	Newtons
Max	Time	Min	Time
379.6	65.3	-472.2	226.3

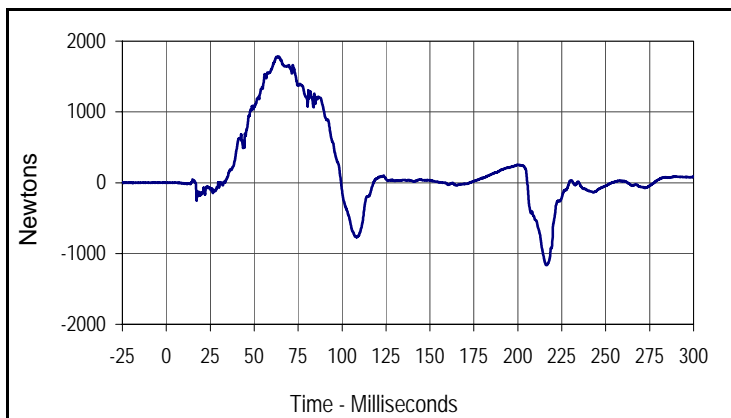

Curve Description			
Driver Upper Neck Force Z			
Plot No.	Type	SAE Class	Units
011	FIL	1000	Newtons
Max	Time	Min	Time
1782.8	63.9	-1165.8	216.5

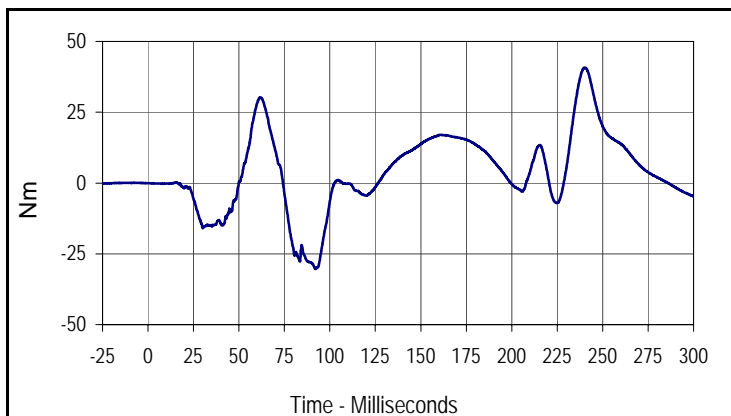


Curve Description			
Driver Upper Neck Moment Y			
Plot No.	Type	SAE Class	Units
012	FIL	600	Nm
Max	Time	Min	Time
40.7	240.0	-30.4	92.1

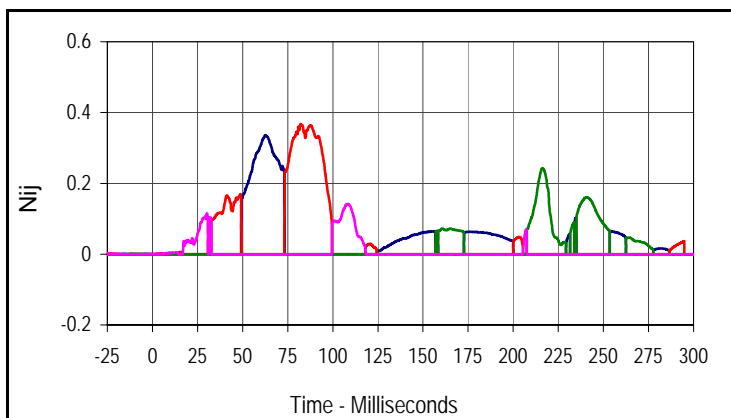


Curve Description			
Driver Nij			
Units	Type	Max	Time
Ntf	FIL	0.34	62.7
Units	Type	Max	Time
Nte	FIL	0.37	82.1
Units	Type	Max	Time
Ncf	FIL	0.24	216.3
Units	Type	Max	Time
Nce	FIL	0.14	108.3

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback
 Test Program: 56 km/h Frontal Impact NCAP Test

NHTSA No.: MD5109
 Test Date: 2/21/13

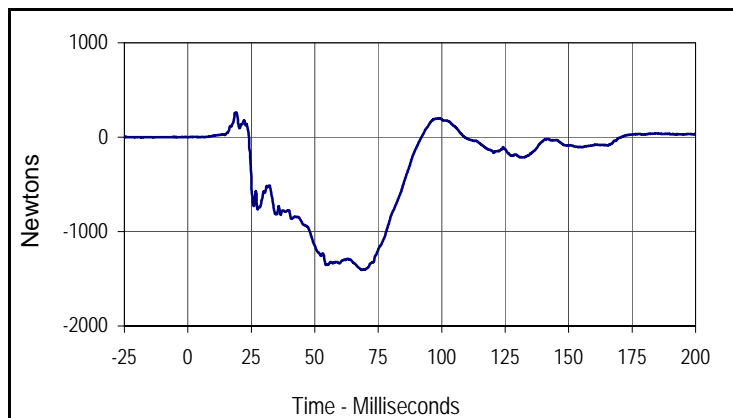


Curve Description			
Driver Left Femur Force Z			
Plot No.	Type	SAE Class	Units
013	FIL	600	Newtons
Max	Time	Min	Time
261.1	19.1	-1406.8	68.5

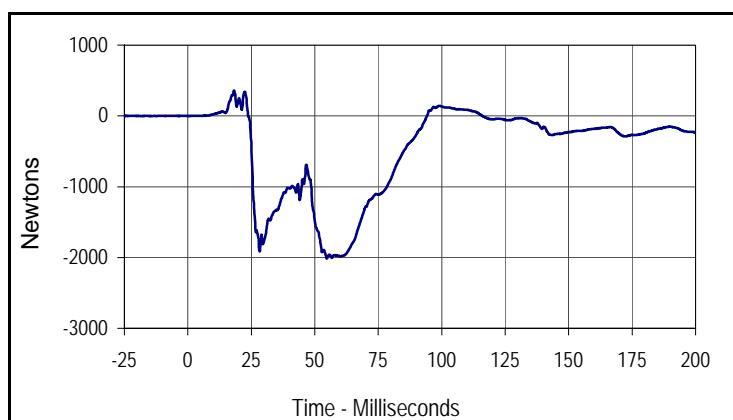


Curve Description			
Driver Right Femur Force Z			
Plot No.	Type	SAE Class	Units
014	FIL	600	Newtons
Max	Time	Min	Time
359.4	18.2	-2012.8	54.8

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback
 Test Program: 56 km/h Frontal Impact NCAP Test


NHTSA No.: MD5109
 Test Date: 2/21/13

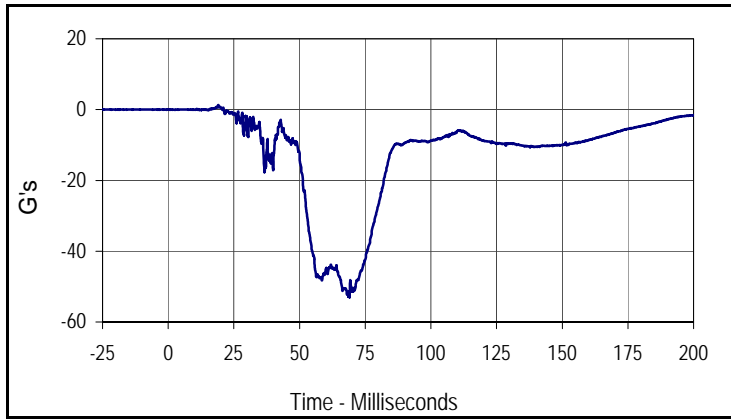


Curve Description			
Passenger Head Acceleration X Primary			
Plot No.	Type	SAE Class	Units
015	FIL	1000	G's
Max	Time	Min	Time
1.3	19.1	-53.0	69.0

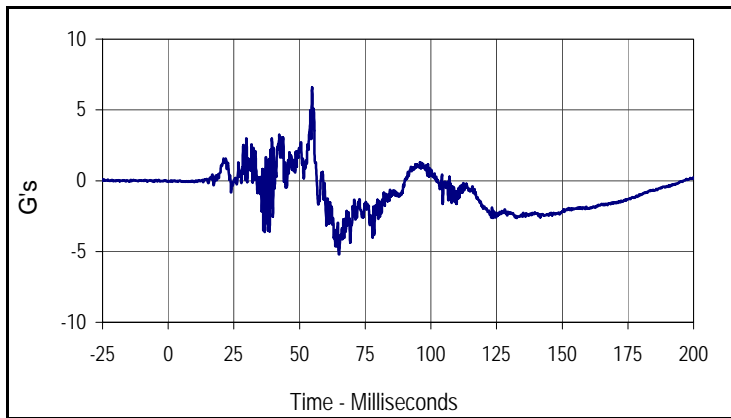

Curve Description			
Passenger Head Acceleration Y Primary			
Plot No.	Type	SAE Class	Units
016	FIL	1000	G's
Max	Time	Min	Time
6.6	54.8	-5.2	65.0

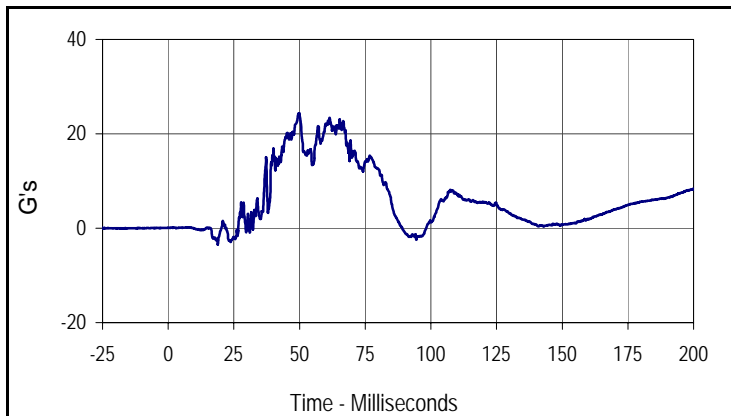


Curve Description			
Passenger Head Acceleration Z Primary			
Plot No.	Type	SAE Class	Units
017	FIL	1000	G's
Max	Time	Min	Time
24.3	50.0	-3.4	18.9

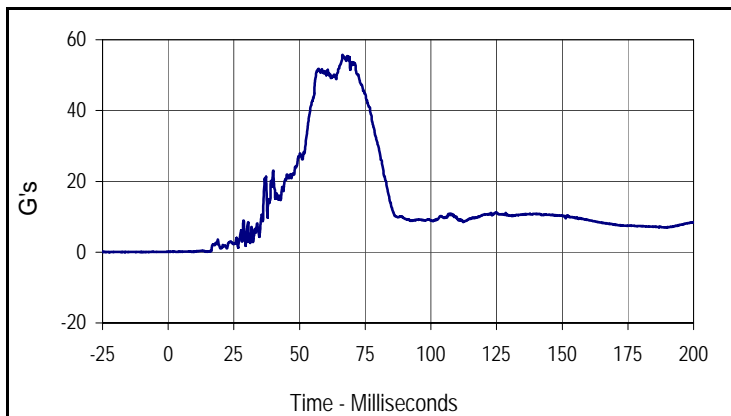

Curve Description			
Passenger Head Resultant Acceleration Primary			
Plot No.	Type	SAE Class	Units
018	RES	1000	G's
Max	Time	Min	Time
55.7	66.4	0.0	9.6

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback
 Test Program: 56 km/h Frontal Impact NCAP Test


NHTSA No.: MD5109
 Test Date: 2/21/13

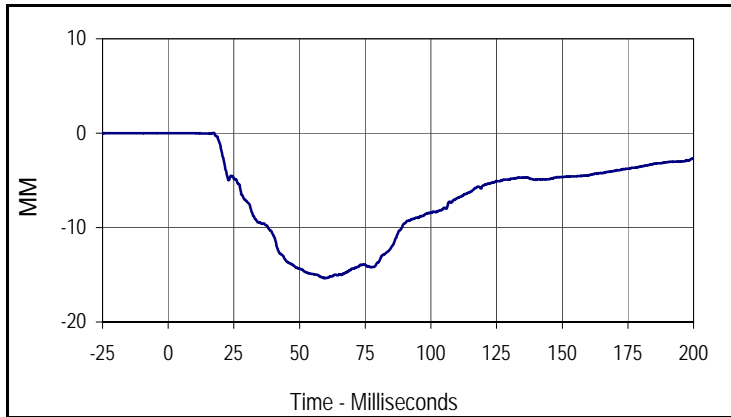


Curve Description			
Passenger Chest Deflection			
Plot No.	Type	SAE Class	Units
019	FIL	600	MM
Max	Time	Min	Time
0.0	17.3	-15.4	59.9

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback
 Test Program: 56 km/h Frontal Impact NCAP Test


NHTSA No.: MD5109
 Test Date: 2/21/13

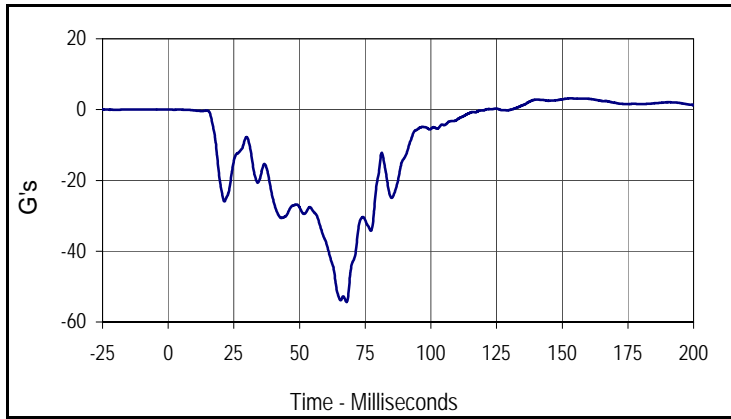


Curve Description			
Passenger Chest Acceleration X Primary			
Plot No.	Type	SAE Class	Units
020	FIL	180	G's
Max	Time	Min	Time
3.2	153.1	-54.4	67.9

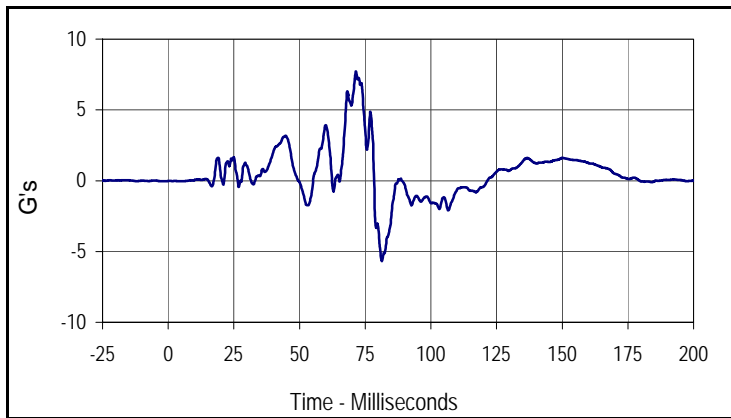

Curve Description			
Passenger Chest Acceleration Y Primary			
Plot No.	Type	SAE Class	Units
021	FIL	180	G's
Max	Time	Min	Time
7.7	71.4	-5.7	81.3

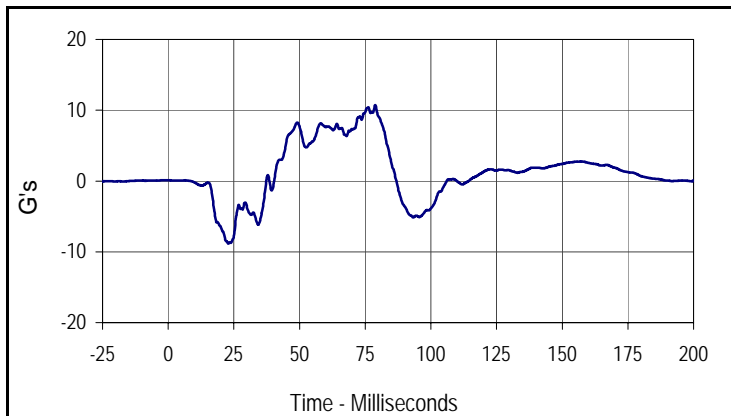


Curve Description			
Passenger Chest Acceleration Z Primary			
Plot No.	Type	SAE Class	Units
022	FIL	180	G's
Max	Time	Min	Time
10.7	78.8	-8.9	22.9

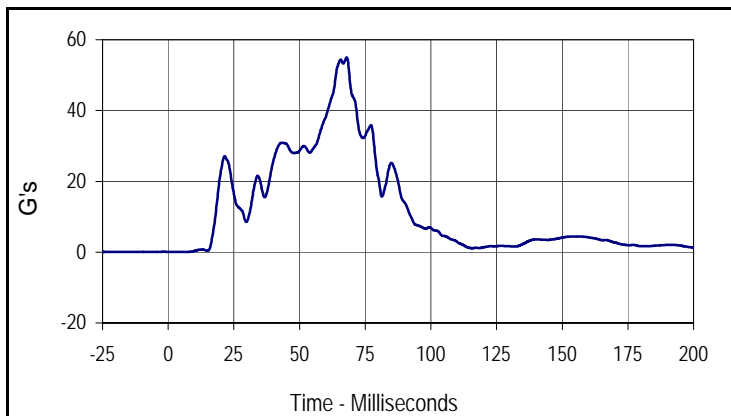


Curve Description			
Passenger Chest Resultant Acceleration Primary			
Plot No.	Type	SAE Class	Units
023	RES	180	G's
Max	Time	Min	Time
55.1	68.0	0.1	2.9

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback
 Test Program: 56 km/h Frontal Impact NCAP Test


NHTSA No.: MD5109
 Test Date: 2/21/13

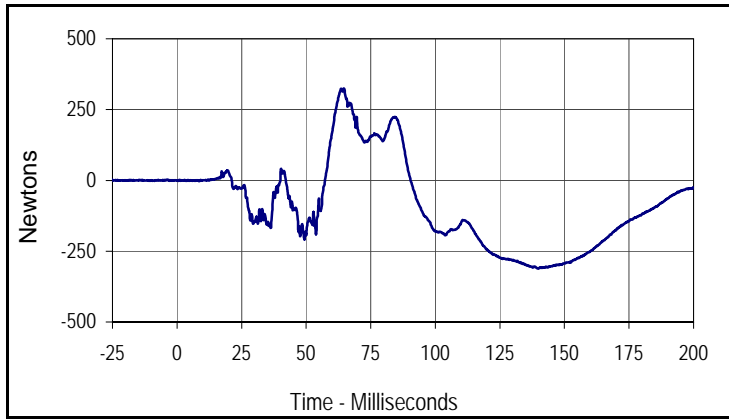


Curve Description			
Passenger Upper Neck Force X			
Plot No.	Type	SAE Class	Units
024	FIL	1000	Newtons
Max	Time	Min	Time
324.6	64.6	-311.0	139.6

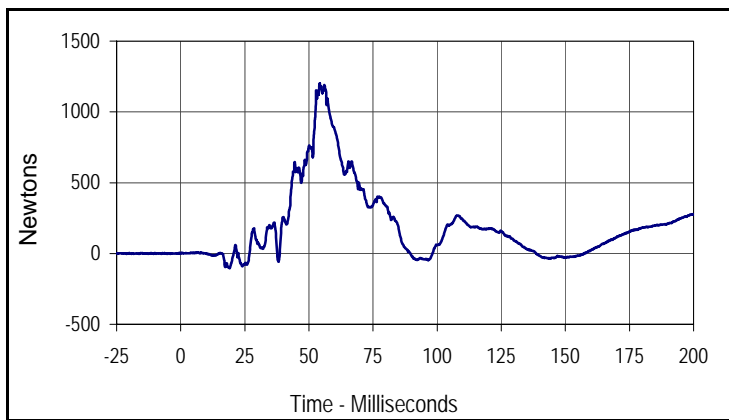

Curve Description			
Passenger Upper Neck Force Z			
Plot No.	Type	SAE Class	Units
025	FIL	1000	Newtons
Max	Time	Min	Time
1201.5	54.2	-103.5	19.1

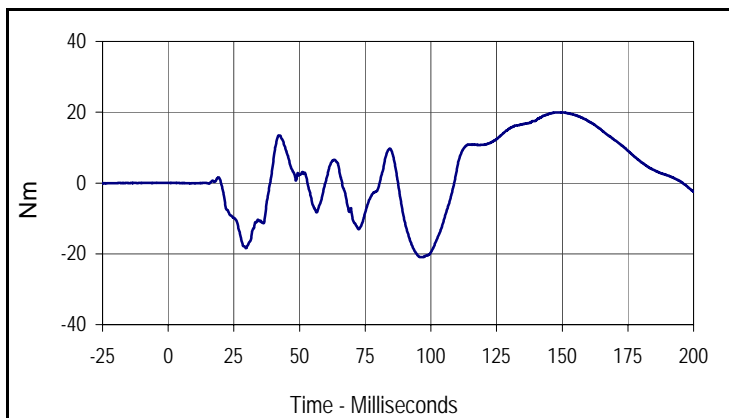


Curve Description			
Passenger Upper Neck Moment Y			
Plot No.	Type	SAE Class	Units
026	FIL	600	Nm
Max	Time	Min	Time
20.0	149.0	-21.0	96.0

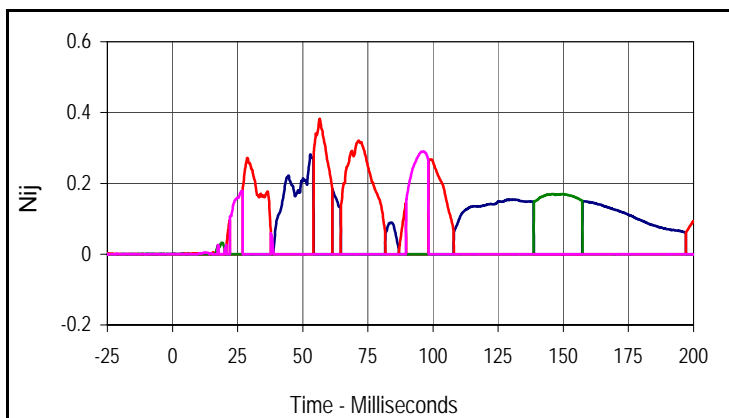


Curve Description			
Passenger Nij			
Units	Type	Max	Time
Ntf	FIL	0.28	53.0
Units	Type	Max	Time
Nte	FIL	0.38	56.5
Units	Type	Max	Time
Ncf	FIL	0.17	149.9
Units	Type	Max	Time
Nce	FIL	0.29	96.5

Test Vehicle: 2013 Toyota Prius C 5-Door Hatchback
 Test Program: 56 km/h Frontal Impact NCAP Test

NHTSA No.: MD5109
 Test Date: 2/21/13

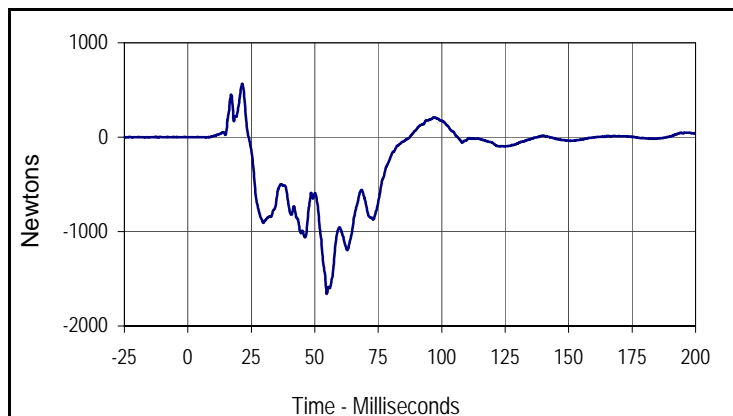

Curve Description			
Passenger Left Femur Force Z			
Plot No.	Type	SAE Class	Units
027	FIL	600	Newtons
Max	Time	Min	Time
565.6	21.4	-1659.4	54.7

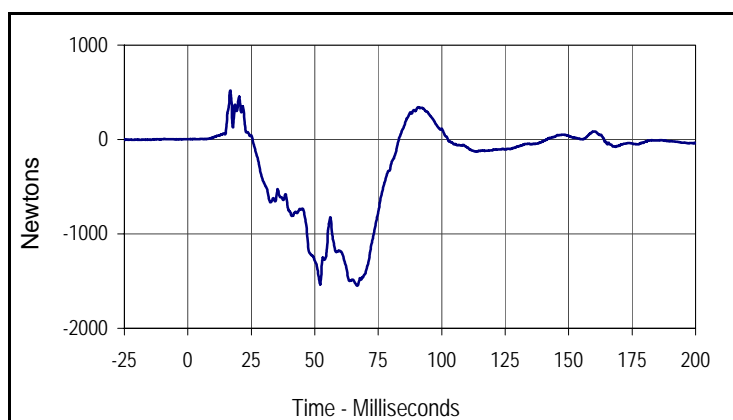

Curve Description			
Passenger Right Femur Force Z			
Plot No.	Type	SAE Class	Units
028	FIL	600	Newtons
Max	Time	Min	Time
517.4	16.7	-1550.0	66.7

APPENDIX C
DUMMY CALIBRATION AND PERFORMANCE VERIFICATION DATA

APPENDIX C
PRE-TEST / ATD CONFIGURATION AND PERFORMANCE VERIFICATION DATA

Test Program: Hybrid III 50th Percentile Male Dummy Damage Checklist

Test Date: 1/14/13



ATD Serial No.: 034

Test I.D.: N/A

Dummy Item	Inspect for	Comments	Damaged	OK
Entire Dummy	Perform general cleaning			X
Outer Skin	Gashes, rips, cracks			X
Head	Ballast secure			X
	General appearance			X
Neck	Broken or cracked rubber			X
	Upper neck bracket firmly attached to the lower neck bracket			X
	Looseness at the condyle joint			X
	Nodding blocks cracked or out of position			X
Spine	Broken or cracks in rubber			X
Ribs	Broken or bent ribs			X
	Broken or bent rib supports			X
	Damping material separated or cracked			X
	Rubber bumpers in place			X
Chest Displacement Assembly	Bent shaft			X
	Slider arm riding in track			X
Transducer Leads	Torn cables			X
Accelerometer Mountings	Head mounting secure			X
	Chest mounting secure			X
Knees	Skin condition			X
	Insert (do not remove)			X
	Casting			X
Limbs	Normal movement and adjustment			X
Knee Sliders	Wires intact			X
	Rubber returned to "at rest" position			X
Pelvis	Broken			X
Other				X

Describe the repair on repair or replacement of parts:

Test Program: Hybrid III 50th Percentile Male External Measurements

Test Date: 1/14/13

ATD Serial No.: 034

Test I.D.: N/A



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.13	Pass
Laboratory Relative Humidity	%	10 to 70	29.6	Pass
A - Total sitting height	mm	879 to 889	884	Pass
B - Shoulder pivot height	mm	505 to 521	512	Pass
C - H point height	mm	84 to 89	85	Pass
D - H point location from backline	mm	135 to 140	137	Pass
E - Shoulder pivot from backline	mm	84 to 94	89	Pass
F - Thigh clearance	mm	140 to 155	146	Pass
G - Back of elbow to wrist pivot	mm	290 to 305	297	Pass
H - Head back to backline	mm	41 to 46	43	Pass
I - Shoulder to elbow length	mm	330 to 345	336	Pass
J - Elbow rest height	mm	190 to 211	201	Pass
K - Buttock to knee length	mm	579 to 604	586	Pass
L - Popliteal length	mm	429 to 455	438	Pass
M - Knee pivot height	mm	485 to 500	493	Pass
N - Buttock popliteal length	mm	452 to 477	472	Pass
O - Chest depth without jacket	mm	213 to 229	225	Pass
P - Foot length	mm	251 to 267	260	Pass
V - Shoulder breadth	mm	422 to 437	433	Pass
W - Foot breadth	mm	91 to 107	99	Pass
Y - Chest circumference (with chest jacket)	mm	970 to 1001	981	Pass
Z - Waist circumference	mm	836 to 866	864	Pass
AA - Location for chest circumference	mm	429 to 434	429	Pass
BB - Location for waist circumference	mm	226 to 231	230	Pass
Overall Test Results			Pass	

Test Program: Hybrid III 50th Percentile Male Head Drop Test


Test Date: 1/14/13




ATD Serial No.: 034

Test I.D.: M034HD040


Tested Parameter	Units	Specification	Result	Pass/Fail
Head Assembly Soak Time	Minutes	≥240	340	Pass
Temperature During Soak	Max	18.9 to 25.6	21.9	Pass
	Min		21.0	Pass
Humidity During Soak	Max	10.0 to 70.0	31.1	Pass
	Min		25.3	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.1	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	29.6	Pass
Peak Resultant Acceleration	G's	225.0 to 275.0	267.0	Pass
Peak Lateral Acceleration	G's	≤15.0	2.6	Pass
Oscillations After Main Pulse	%	<10% of peak Res. Acceleration	4.8	Pass
Is Acceleration Unimodal?	Yes/No	Yes	Yes	Pass
Overall Test Results				Pass

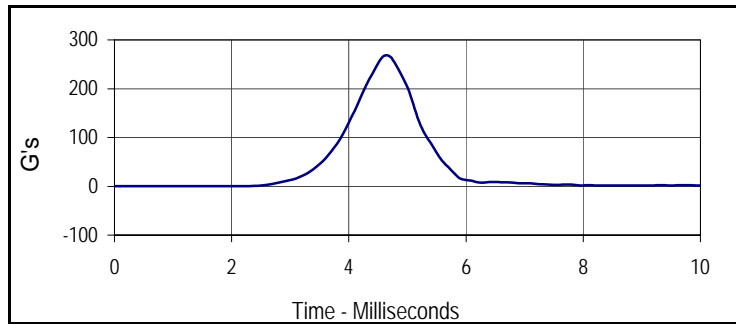


Curve Description			
Head Resultant			
Plot No.	Type	SAE Class	Units
001	RES	1000	G's
Max	Time	Min	Time
267.0	4.6	0.1	0.0

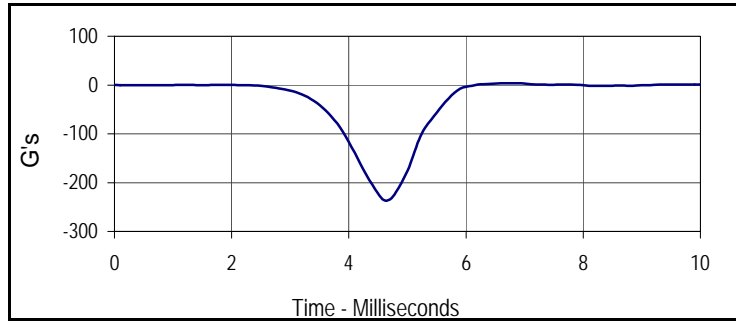

Curve Description			
Head X			
Plot No.	Type	SAE Class	Units
002	FIL	1000	G's
Max	Time	Min	Time
3.9	6.6	-235.6	4.6

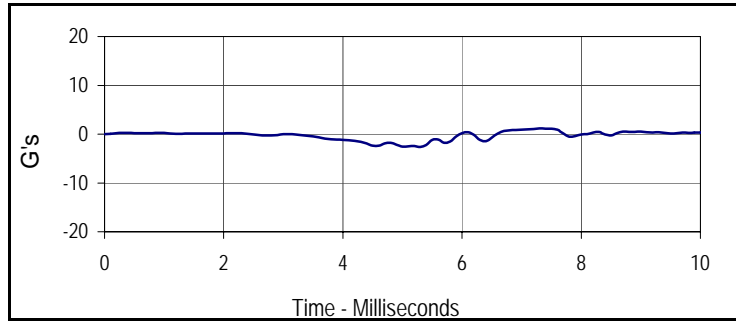

Curve Description			
Head Y			
Plot No.	Type	SAE Class	Units
003	FIL	1000	G's
Max	Time	Min	Time
1.2	7.3	-2.6	5.3

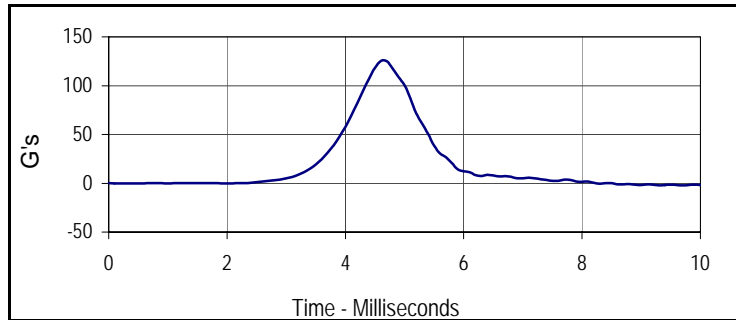

Curve Description			
Head Z			
Plot No.	Type	SAE Class	Units
004	FIL	1000	G's
Max	Time	Min	Time
125.5	4.6	-0.1	0.2

Test Program: Hybrid III 50th Percentile Male Neck Flexion Test


Test Date: 1/14/13




ATD Serial No.: 034

Test I.D.: M034NF040


Tested Parameter	Units	Specification	Result	Pass/Fail	
Neck Assembly Soak Time	Minutes	≥240	390	Pass	
Temperature During Soak	Max	20.6 to 22.2	21.9	Pass	
	Min		21.0	Pass	
Humidity During Soak	Max	10.0 to 70.0	31.1	Pass	
	Min		25.3	Pass	
Laboratory Temperature During Test	°C	20.6 to 22.2	21.1	Pass	
Laboratory Humidity During Test	%	10.0 to 70.0	29.6	Pass	
Pendulum Velocity	m/s	6.89 to 7.13	6.94	Pass	
Pendulum Deceleration	10 Msec.	G's	22.5 to 27.5	23.2	Pass
	20 Msec.	G's	17.6 to 22.6	20.7	Pass
	30 Msec.	G's	12.5 to 18.5	16.3	Pass
Peak Pendulum Decel. after 30 Msec.	G's	≤ 29.0	16.3	Pass	
Deceleration Decay, Time to Cross 5 G's	Msec.	34.0 to 42.0	39.9	Pass	
Maximum "D" Plane Rotation	Max	Degrees	64.0 to 78.0	71.1	Pass
	Time	Msec.	57.0 to 64.0	57.4	Pass
"D" Plane Rotation Decay, Time To Zero Crossing	Msec.	113.0 to 128.0	116.4	Pass	
Moment About Occ. Condyle	Max	Nm	88.1 to 108.5	95.0	Pass
	Time	Msec.	47.0 to 58.0	53.1	Pass
Positive Moment Decay, Time To Zero Crossing	Msec.	97.0 to 107.0	98.7	Pass	
Overall Test Results				Pass	

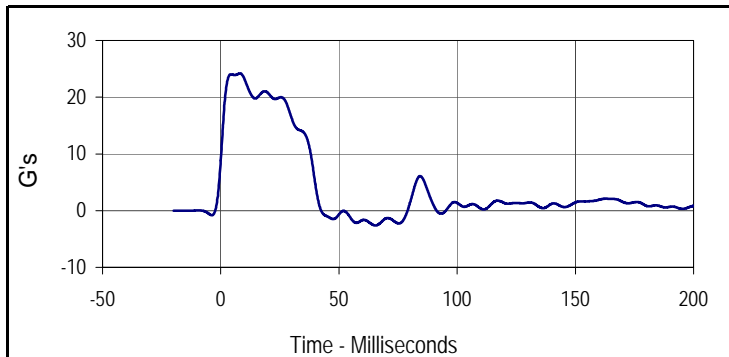

Curve Description			
Pendulum Deceleration			
Plot No.	Type	SAE Class	Units
001	FIL	60	G's
Max	Time	Min	Time
24.2	8.1	-2.6	65.4

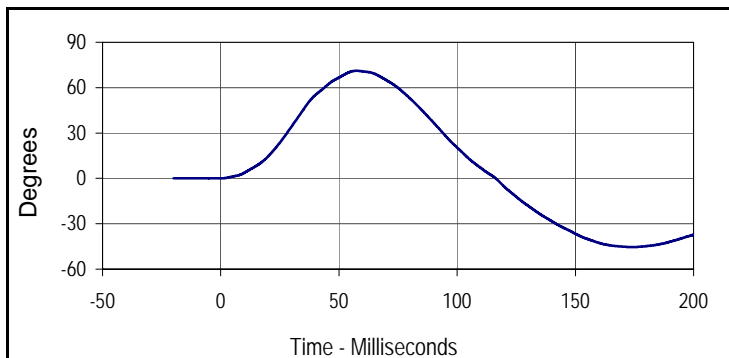

Curve Description			
"D" Plane Rotation			
Plot No.	Type	SAE Class	Units
002	FIL	60	Degrees
Max	Time	Min	Time
71.1	57.4	-45.4	173.9

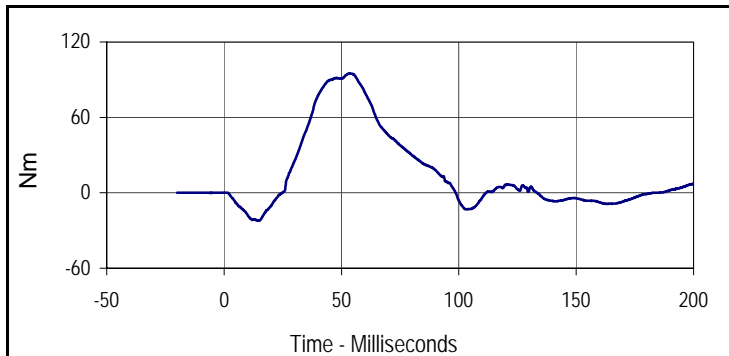

Curve Description			
Moment About Occipital Condyle			
Plot No.	Type	SAE Class	Units
003	FIL	600	Nm
Max	Time	Min	Time
95.0	53.1	-22.0	14.1


Test Program: Hybrid III 50th Percentile Male Neck Flexion Test

Test Date: 1/14/13




ATD Serial No.: 034

Test I.D.: M034NF040

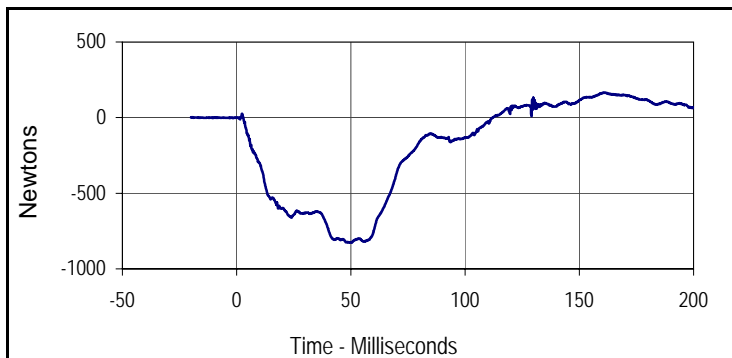

Curve Description			
Neck Force X			
Plot No.	Type	SAE Class	Units
004	FIL	1000	Newtons
Max	Time	Min	Time
165.3	160.8	-826.9	49.7

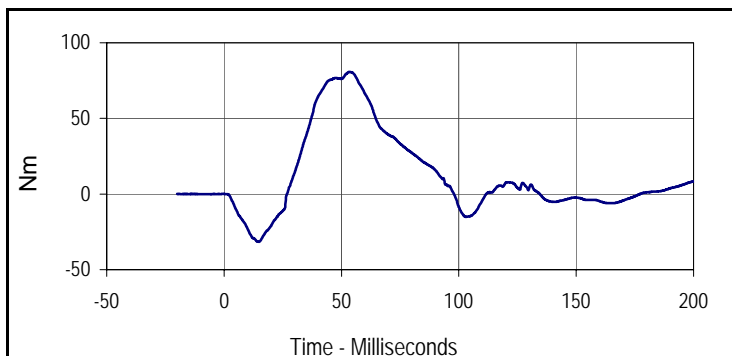

Curve Description			
Neck Moment Y			
Plot No.	Type	SAE Class	Units
005	FIL	600	Nm
Max	Time	Min	Time
80.8	53.2	-31.6	14.9

Test Program: Hybrid III 50th Percentile Male Neck Extension Test


Test Date: 1/14/13




ATD Serial No.: 034

Test I.D.: M034NE040


Tested Parameter	Units	Specification	Result	Pass/Fail	
Neck Assembly Soak Time	Minutes	≥240	425	Pass	
Temperature During Soak	Max	20.6 to 22.2	21.9	Pass	
	Min		21.0	Pass	
Humidity During Soak	Max	10.0 to 70.0	31.1	Pass	
	Min		25.3	Pass	
Laboratory Temperature During Test	°C	20.6 to 22.2	21.2	Pass	
Laboratory Humidity During Test	%	10.0 to 70.0	29.5	Pass	
Pendulum Velocity	m/s	5.94 to 6.19	5.95	Pass	
Pendulum Deceleration	10 Msec.	G's	17.2 to 21.2	21.2	Pass
	20 Msec.	G's	14.0 to 19.0	18.1	Pass
	30 Msec.	G's	11.0 to 16.0	14.3	Pass
Peak Pendulum Decel. after 30 Msec.	G's	≤ 22.0	14.3	Pass	
Deceleration Decay, Time to Cross 5 G's	Msec.	38.0 to 46.0	41.1	Pass	
Maximum "D" Plane Rotation	Max	Degrees	81.0 to 106.0	93.9	Pass
	Time	Msec.	72.0 to 82.0	72.1	Pass
"D" Plane Rotation Decay, Time To Zero Crossing	Msec.	147.0 to 174.0	149.8	Pass	
Moment About Occ. Condyle	Max	Nm	-52.9 to -79.9	-68.5	Pass
	Time	Msec.	65.0 to 79.0	65.7	Pass
Positive Moment Decay, Time To Zero Crossing	Msec.	120.0 to 148.0	132.7	Pass	
Overall Test Results				Pass	

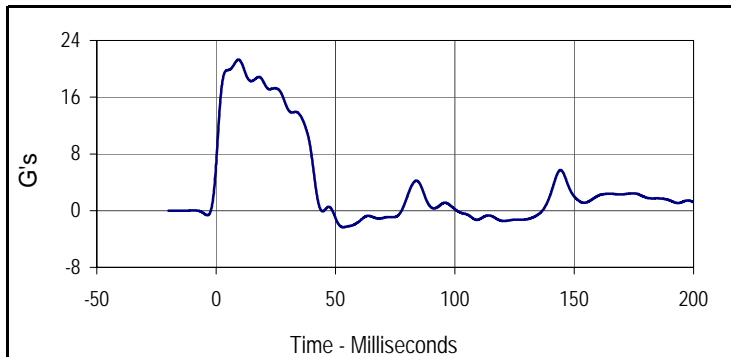

Curve Description			
Pendulum Deceleration			
Plot No.	Type	SAE Class	Units
001	FIL	60	G's
Max	Time	Min	Time
21.3	9.3	-2.3	53.2

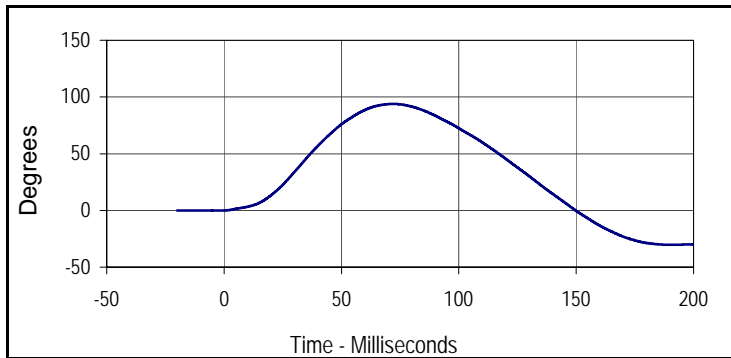

Curve Description			
"D" Plane Rotation			
Plot No.	Type	SAE Class	Units
002	FIL	60	Degrees
Max	Time	Min	Time
93.9	72.1	-30.3	190.0

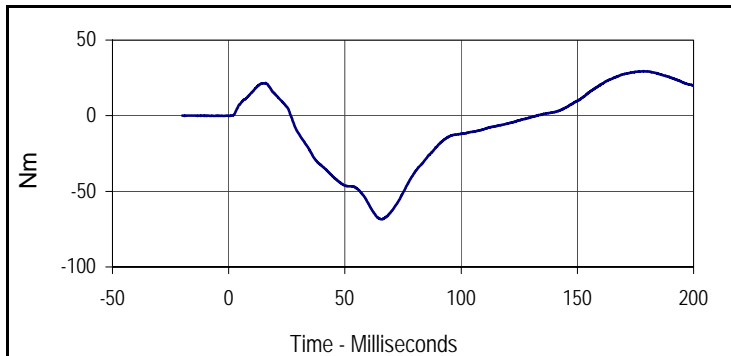

Curve Description			
Moment About Occipital Condyle			
Plot No.	Type	SAE Class	Units
003	FIL	600	Nm
Max	Time	Min	Time
29.4	178.4	-68.5	65.7


Test Program: Hybrid III 50th Percentile Male Neck Extension Test

Test Date: 1/14/13




ATD Serial No.: 034

Test I.D.: M034NE040

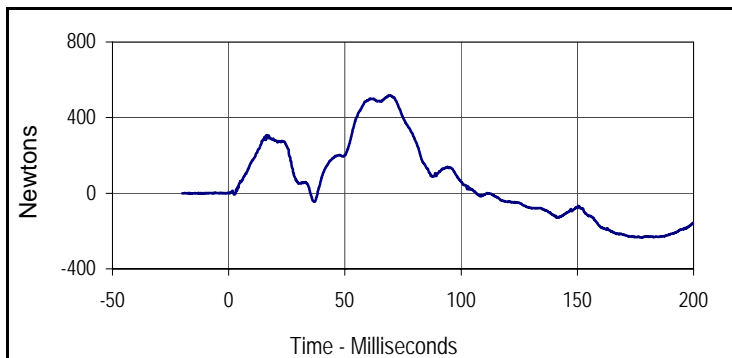

Curve Description			
Neck Force X			
Plot No.	Type	SAE Class	Units
004	FIL	1000	Newtons
Max	Time	Min	Time
517.6	69.1	-233.9	177.1

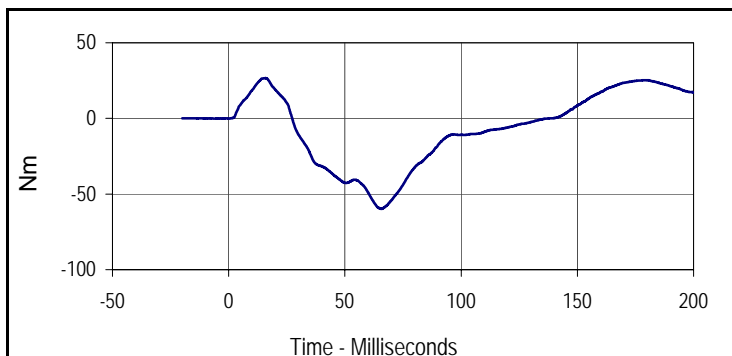

Curve Description			
Neck Moment Y			
Plot No.	Type	SAE Class	Units
005	FIL	600	Nm
Max	Time	Min	Time
26.7	15.9	-59.8	65.8

Test Program: Hybrid III 50th Percentile Male Thorax Impact Test


Test Date: 1/14/13




ATD Serial No.: 034

Test I.D.: M034CH040


Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥240	475	Pass
Temperature During Soak	Max	20.6 to 22.2	21.9	Pass
	Min		21.0	Pass
Humidity During Soak	Max	10.0 to 70.0	31.1	Pass
	Min		25.3	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	29.6	Pass
Probe Velocity	m/s	6.58 to 6.82	6.71	Pass
Peak Probe Force	Newtons	5159 to 5893	5563	Pass
Peak Sternum Deflection	CM	6.35 to 7.26	6.86	Pass
Internal Hysteresis	%	69 to 85	69.8	Pass
Overall Test Results				Pass

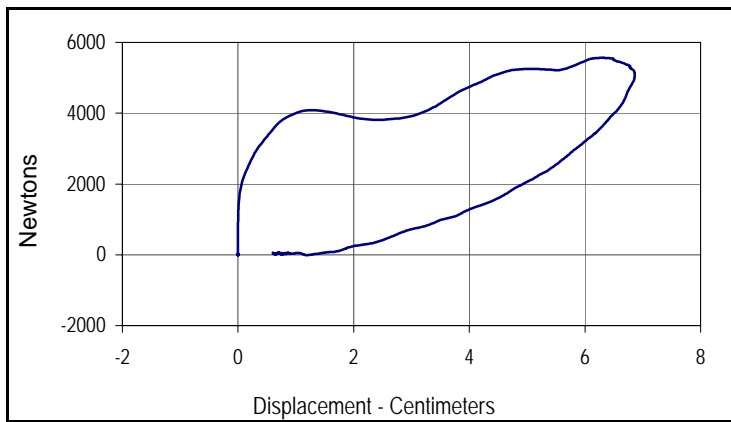

Curve Description			
Probe Force vs. Chest Deflection			
Plot No.	Type	SAE Class	Hysteresis
001	FIL	600	69.8
Peak Probe Force		Peak Chest Deflection	
5563		6.86	

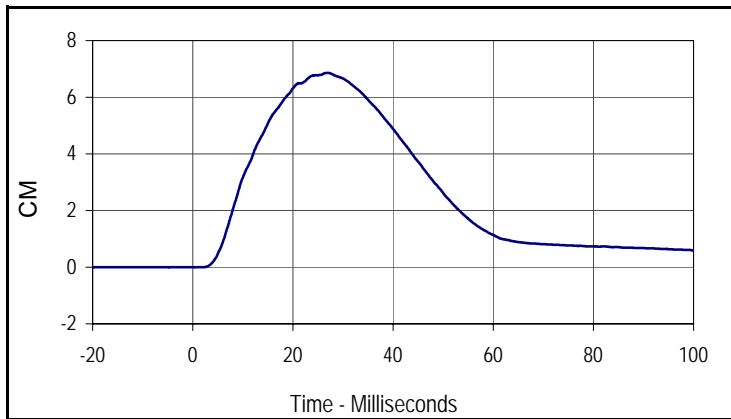

Curve Description			
Chest Deflection			
Plot No.	Type	SAE Class	Units
002	FIL	600	CM
Max	Time	Min	Time
6.9	26.9	0.0	0.1

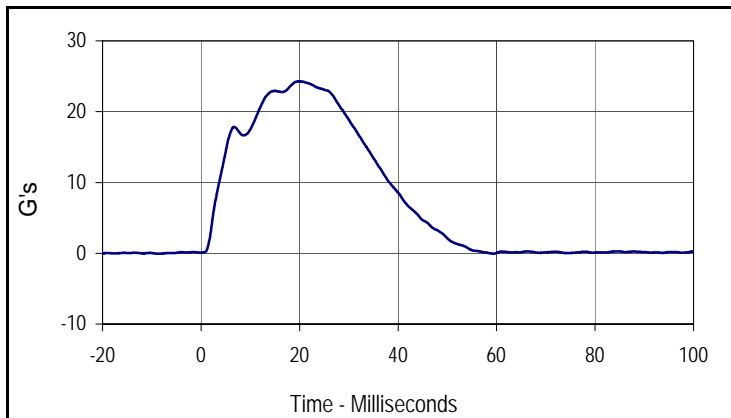

Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
003	FIL	600	G's
Max	Time	Min	Time
24.3	19.9	-0.1	-20.0




Left Knee


Tested Parameter	Units	Specification	Result	Pass/Fail
Knee Assembly Soak Time	Minutes	≥240	510	Pass
Temperature During Soak	Max	18.9 to 25.6	21.9	Pass
	Min		21.0	Pass
Humidity During Soak	Max	10.0 to 70.0	31.1	Pass
	Min		25.3	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.1	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	29.6	Pass
Pendulum Velocity at T=0	m/sec	2.07 to 2.13	2.09	Pass
Peak Probe Force	Newtons	4715 to 5782	4955	Pass
Overall Test Results				Pass

Right Knee


Pendulum Velocity at T=0	m/sec	2.07 to 2.13	2.10	Pass
Peak Probe Force	Newtons	4715 to 5782	4965	Pass
Overall Test Results				Pass

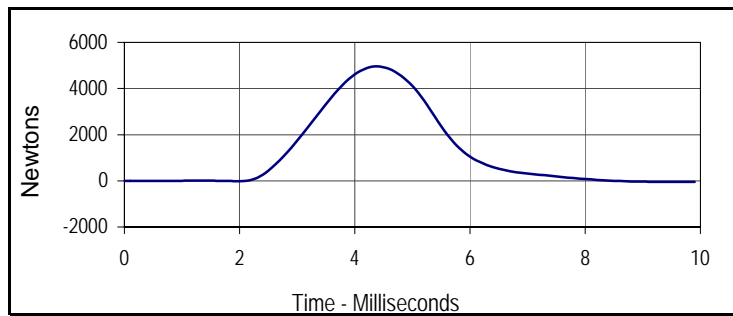


Curve Description			
Left Knee Probe Force			
Plot No.	Type	SAE Class	Units
001	FIL	600	Newtons
Max	Time	Min	Time
4954.7	4.4	-43.4	9.8

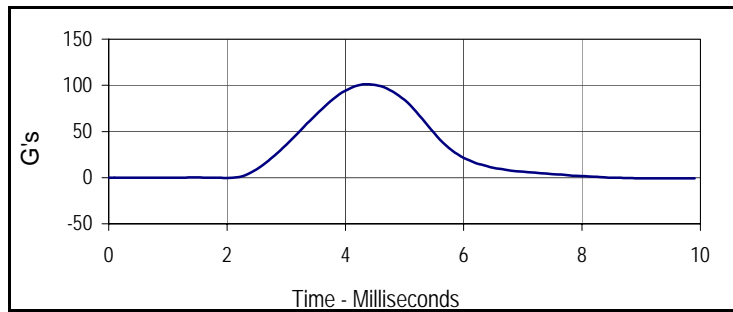

Curve Description			
Left Knee Acceleration			
Plot No.	Type	SAE Class	Units
002	FIL	600	G's
Max	Time	Min	Time
101.3	4.4	-0.9	9.8

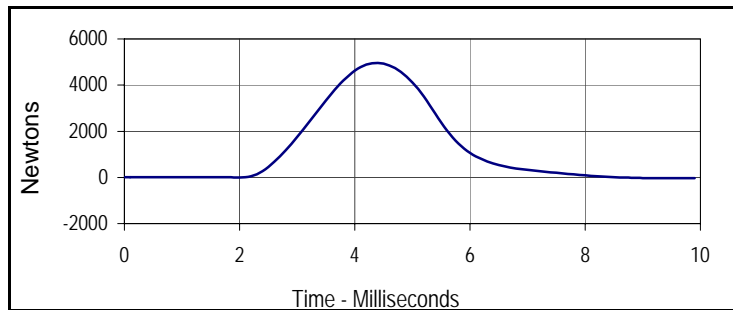

Curve Description			
Right Knee Probe Force			
Plot No.	Type	SAE Class	Units
003	FIL	600	Newtons
Max	Time	Min	Time
4965.3	4.4	-31.1	9.8

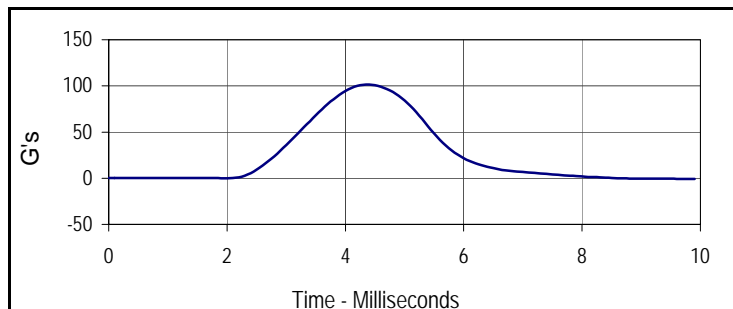

Curve Description			
Right Knee Acceleration			
Plot No.	Type	SAE Class	Units
004	FIL	600	G's
Max	Time	Min	Time
101.5	4.4	-0.6	9.8

Test Program: Hybrid III 50th Percentile Male Hip Joint-Femur Flexion Test

Test Date: 1/14/13



ATD Serial No.: 034


Test I.D.: M034LF040, M034RF040

Left Hip Joint-Femur Results


Tested Parameter	Units	Specification	Result	Pass/Fail
Hip Joint-Femur Assembly Soak Time	Minutes	≥240	560	Pass
Temperature During Soak	Max	18.9 to 25.6	21.9	Pass
	Min		21.0	Pass
Humidity During Soak	Max	10.0 to 70.0	31.1	Pass
	Min		25.3	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.1	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	29.6	Pass
Rotation Rate	deg/sec	5 to 10	7.7	Pass
Femur Torque at 30°	Nm	≤ 95	92.4	Pass
Rotation at 203 Nm	Degrees	40.0 to 50.0	49.2	Pass
Overall Test Results				Pass

Right Hip Joint-Femur Results


Rotation Rate	deg/sec	5 to 10	7.9	Pass
Femur Torque at 30°	Nm	≤ 95	90.1	Pass
Rotation at 203 Nm	Degrees	40.0 to 50.0	49.6	Pass
Overall Test Results				Pass

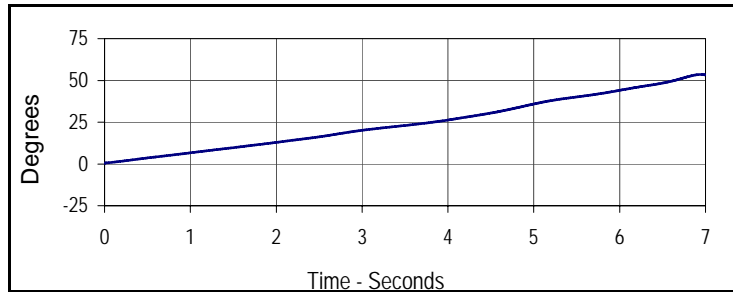


Curve Description			
Left Hip-Femur Rotation			
Plot No.	Type	SAE Class	Units
001	FIL	60	Degrees
Max	Time	Min	Time
53.6	6.9	0.5	0.0

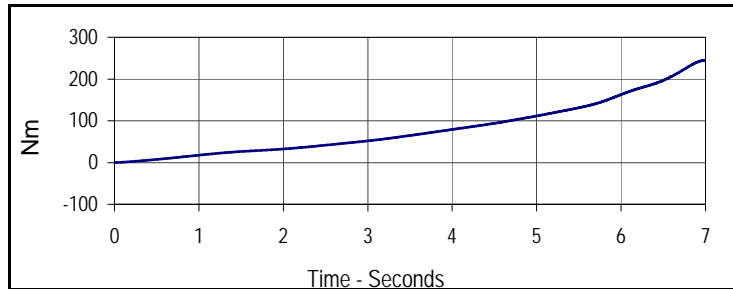

Curve Description			
Left Femur Torque			
Plot No.	Type	SAE Class	Units
002	FIL	600	Nm
Max	Time	Min	Time
245.8	7.0	-0.3	0.0

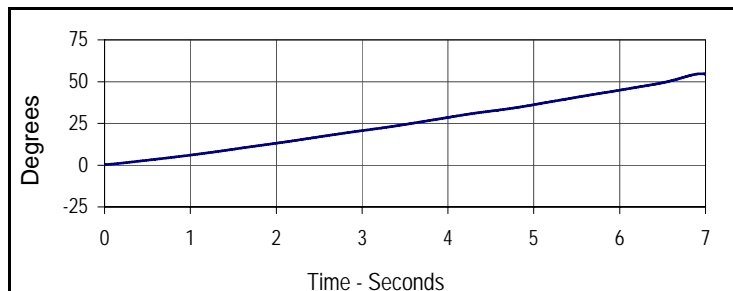

Curve Description			
Right Hip-Femur Rotation			
Plot No.	Type	SAE Class	Units
003	FIL	60	Degrees
Max	Time	Min	Time
54.7	7.0	0.3	0.0

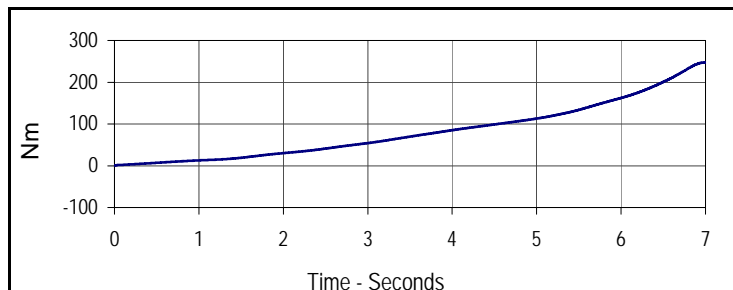

Curve Description			
Right Femur Torque			
Plot No.	Type	SAE Class	Units
004	FIL	600	Nm
Max	Time	Min	Time
247.1	7.0	1.2	0.0

Test Program: Hybrid III 5th Percentile Female Dummy Damage Checklist

Test Date: 1/17/13



ATD Serial No.: 141

Test I.D.: N/A

Dummy Item	Inspect for	Comments	Damaged	OK
Entire Dummy	Perform general cleaning			X
Outer Skin	Gashes, rips, cracks			X
Head	Ballast secure			X
	General appearance			X
Neck	Broken or cracked rubber			X
	Upper neck bracket firmly attached to the lower neck bracket			X
	Looseness at the condyle joint			X
	Nodding blocks cracked or out of position			X
Spine	Broken or cracks in rubber			X
Ribs	Broken or bent ribs			X
	Broken or bent rib supports			X
	Damping material separated or cracked			X
	Rubber bumpers in place			X
Chest Displacement Assembly	Bent shaft			X
	Slider arm riding in track			X
Transducer Leads	Torn cables			X
Accelerometer Mountings	Head mounting secure			X
	Chest mounting secure			X
Knees	Skin condition			X
	Insert (do not remove)			X
	Casting			X
Limbs	Normal movement and adjustment			X
Knee Sliders	Wires intact			X
	Rubber returned to "at rest" position			X
Pelvis	Broken			X
Other				X

Describe the repair on repair or replacement of parts:

Test Program: Hybrid III 5th Percentile Female External Measurements

Test Date: 1/17/13

ATD Serial No.: 141

Test I.D.: N/A



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	29.7	Pass
A - Total sitting height	mm	774.7 to 800.1	784	Pass
B - Shoulder pivot height	mm	431.8 to 457.2	450	Pass
C - H point height	mm	81.3 to 86.3	85	Pass
D - H point location from backline	mm	144.8 to 149.8	146	Pass
E - Shoulder pivot from backline	mm	68.6 to 83.8	77	Pass
F - Thigh clearance	mm	119.4 to 134.6	126	Pass
G - Back of elbow to wrist pivot	mm	243.9 to 259.1	250	Pass
H - Head back to backline	mm	40.7 to 45.7	44	Pass
I - Shoulder to elbow length	mm	276.8 to 297.2	285	Pass
J - Elbow rest height	mm	182.8 to 203.2	197	Pass
K - Buttock to knee length	mm	520.7 to 546.1	531	Pass
L - Popliteal length	mm	355.6 to 376.0	371	Pass
M - Knee pivot height	mm	393.7 to 419.1	401	Pass
N - Buttock popliteal length	mm	414.0 to 439.4	420	Pass
O - Chest depth without jacket	mm	175.3 to 190.5	185	Pass
P - Foot length	mm	218.5 to 233.7	221	Pass
R - Buttock to Knee Pivot Length	mm	457.2 to 482.6	473	Pass
S - Head Breadth	mm	137.1 to 147.3	144	Pass
T - Head Depth	mm	177.8 to 188.0	180	Pass
U - Hip Breadth	mm	299.7 to 314.9	302	Pass
V - Shoulder breadth	mm	350.5 to 365.7	359	Pass
W - Foot breadth	mm	78.8 to 94.0	90	Pass
X - Head circumference	mm	528.3 to 548.7	541	Pass
Y - Chest circumference (with chest jacket)	mm	850.8 to 881.3	864	Pass
Z - Waist circumference	mm	759.5 to 789.9	768	Pass
AA - Location for chest circumference	mm	299.7 to 309.9	300	Pass
BB - Location for waist circumference	mm	160.1 to 170.2	165	Pass
Overall Test Results				Pass

Test Program: Hybrid III 5th Percentile Female Head Drop Test


Test Date: 1/17/13




ATD Serial No.: 141

Test I.D.: F141HD053


Tested Parameter	Units	Specification	Result	Pass/Fail
Head Assembly Soak Time	Minutes	≥240	320	Pass
Temperature During Soak	Max	18.9 to 25.6	21.8	Pass
	Min		20.6	Pass
Humidity During Soak	Max	10.0 to 70.0	30.2	Pass
	Min		24.2	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	29.7	Pass
Peak Resultant Acceleration	G's	250.0 to 300.0	261.5	Pass
Peak Lateral Acceleration	G's	≤15.0	6.2	Pass
Oscillations After Main Pulse	%	<10% of peak Res. Acceleration	1.8	Pass
Is Acceleration Unimodal?	Yes/No	Yes	Yes	Pass
Overall Test Results				Pass

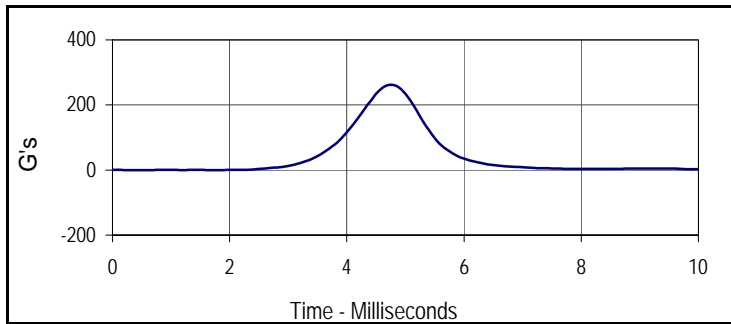


Curve Description			
Head Resultant			
Plot No.	Type	SAE Class	Units
001	RES	1000	G's
Max	Time	Min	Time
261.5	4.8	0.1	0.6

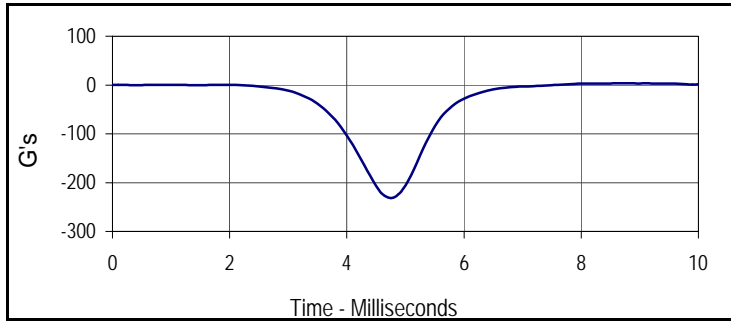

Curve Description			
Head X			
Plot No.	Type	SAE Class	Units
002	FIL	1000	G's
Max	Time	Min	Time
2.7	8.0	-230.4	4.7

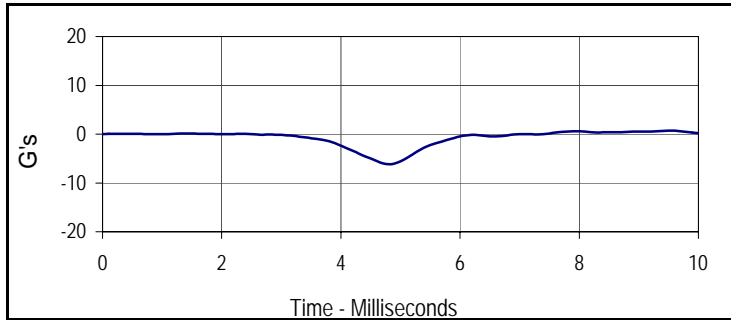

Curve Description			
Head Y			
Plot No.	Type	SAE Class	Units
003	FIL	1000	G's
Max	Time	Min	Time
0.6	8.0	-6.2	4.8

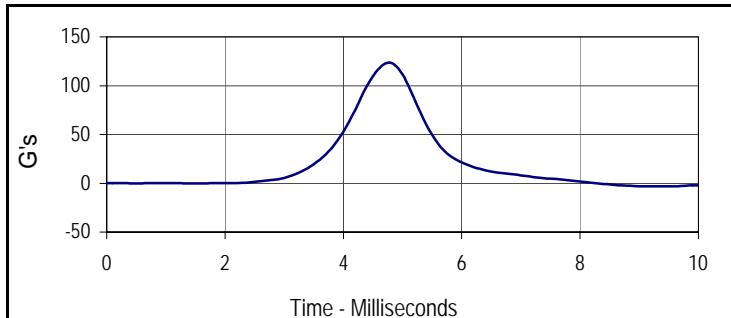

Curve Description			
Head Z			
Plot No.	Type	SAE Class	Units
004	FIL	1000	G's
Max	Time	Min	Time
123.5	4.8	-0.2	1.4

Test Program: Hybrid III 5th Percentile Female Neck Flexion Test


Test Date: 1/17/13




ATD Serial No.: 141

Test I.D.: F141NF053


Tested Parameter	Units	Specification	Result	Pass/Fail	
Neck Assembly Soak Time	Minutes	≥240	375	Pass	
Temperature During Soak	Max	20.6 to 22.2	21.8	Pass	
	Min		20.6	Pass	
Humidity During Soak	Max	10.0 to 70.0	30.2	Pass	
	Min		24.2	Pass	
Laboratory Temperature During Test	°C	20.6 to 22.2	21.2	Pass	
Laboratory Humidity During Test	%	10.0 to 70.0	29.7	Pass	
Pendulum Velocity	m/s	6.89 to 7.13	6.98	Pass	
Pendulum Deceleration	10 Msec.	m/s	2.1 to 2.5	2.5	Pass
	20 Msec.	m/s	4.0 to 5.0	4.8	Pass
	30 Msec.	m/s	5.8 to 7.0	6.8	Pass
"D" Plane Rotation	Max	Degrees	77.0 to 91.0	82.5	Pass
Peak Moment in Rotation	Max	Nm	69.0 to 83.0	82.1	Pass
Positive Moment Decay, Time To 10 Nm	Msec.	80.0 to 100.0	83.6	Pass	
Overall Test Results				Pass	

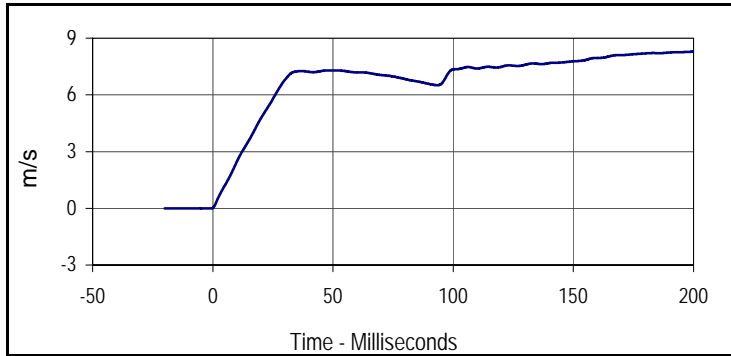

Curve Description			
Pendulum Velocity			
Plot No.	Type	SAE Class	Units
001	FIL	180	m/s
Max	Time	Min	Time
8.3	200.0	0.0	-0.8

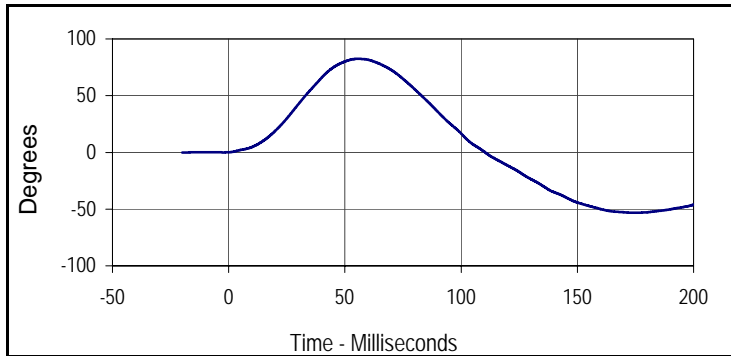

Curve Description			
"D" Plane Rotation			
Plot No.	Type	SAE Class	Units
002	FIL	60	Degrees
Max	Time	Min	Time
82.5	55.7	-53.2	174.1

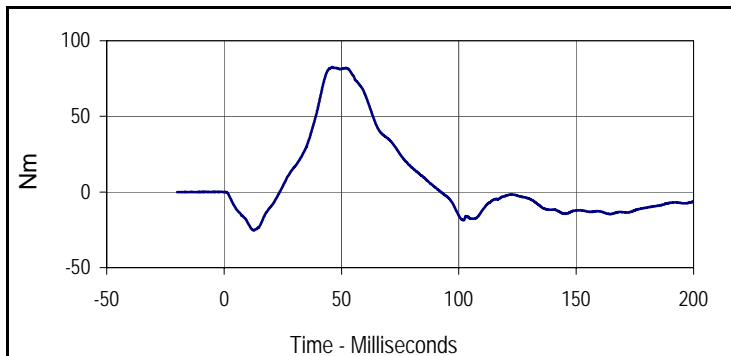

Curve Description			
Moment About Occipital Condyle			
Plot No.	Type	SAE Class	Units
003	FIL	600	Nm
Max	Time	Min	Time
82.6	46.0	-25.6	12.7


Test Program: Hybrid III 5th Percentile Female Neck Flexion Test

Test Date: 1/17/13




ATD Serial No.: 141

Test I.D.: F141NF053

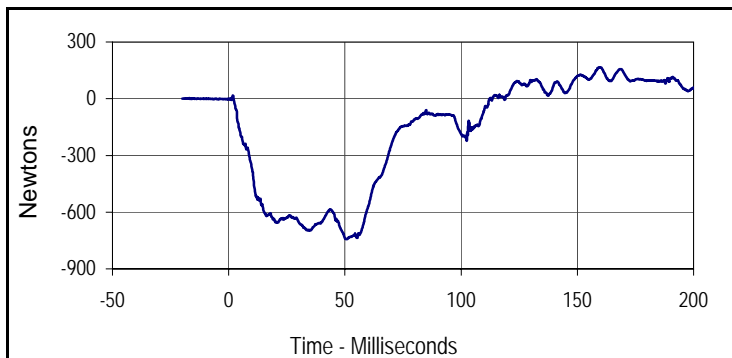

Curve Description			
Upper Neck Force X			
Plot No.	Type	SAE Class	Units
004	FIL	1000	Newtons
Max	Time	Min	Time
166.3	159.5	-742.4	50.7

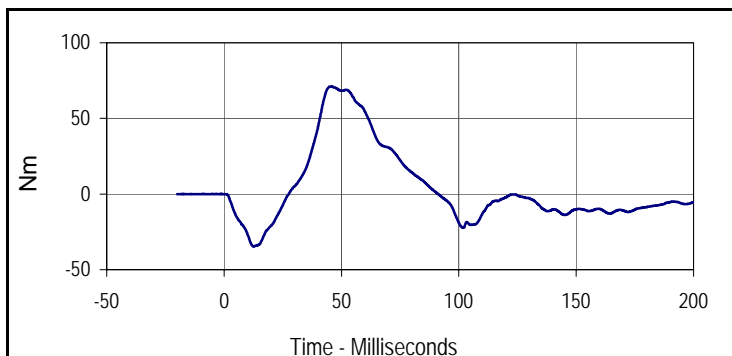


Curve Description			
Neck Moment Y			
Plot No.	Type	SAE Class	Units
005	FIL	600	Nm
Max	Time	Min	Time
71.2	46.0	-34.9	12.8

Test Program: Hybrid III 5th Percentile Female Neck Extension Test
 ATD Serial No.: 141


Test Date: 1/17/13
 Test I.D.: F141NE053




Tested Parameter	Units	Specification	Result	Pass/Fail	
Neck Assembly Soak Time	Minutes	≥240	410	Pass	
Temperature During Soak	Max	20.6 to 22.2	21.8	Pass	
	Min		20.6	Pass	
Humidity During Soak	Max	10.0 to 70.0	30.2	Pass	
	Min		24.2	Pass	
Laboratory Temperature During Test	°C	20.6 to 22.2	21.2	Pass	
Laboratory Humidity During Test	%	10.0 to 70.0	29.6	Pass	
Pendulum Velocity	m/s	5.95 to 6.19	6.09	Pass	
Pendulum Deceleration	10 Msec.	m/s	1.5 to 1.9	1.9	Pass
	20 Msec.	m/s	3.1 to 3.9	3.7	Pass
	30 Msec.	m/s	4.6 to 5.6	5.4	Pass
"D" Plane Rotation	Max	Degrees	99.0 to 114.0	105.2	Pass
Peak Moment in Rotation	Max	Nm	-53.0 to -65.0	-54.7	Pass
Positive Moment Decay, Time To -10 Nm	Msec.	94.0 to 114.0	96.7	Pass	
Overall Test Results				Pass	

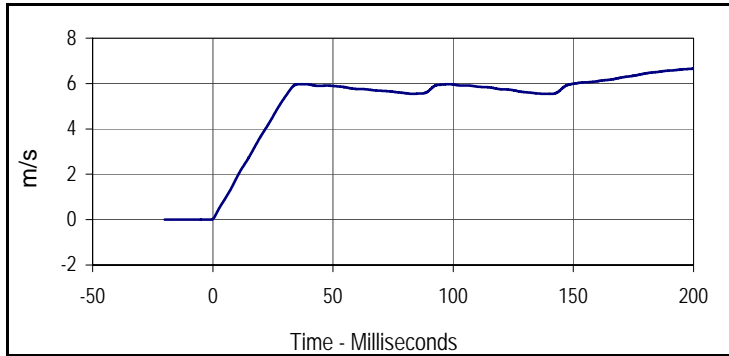

Curve Description			
Pendulum Velocity			
Plot No.	Type	SAE Class	Units
001	FIL	180	m/s
Max	Time	Min	Time
6.7	200.0	0.0	-1.0

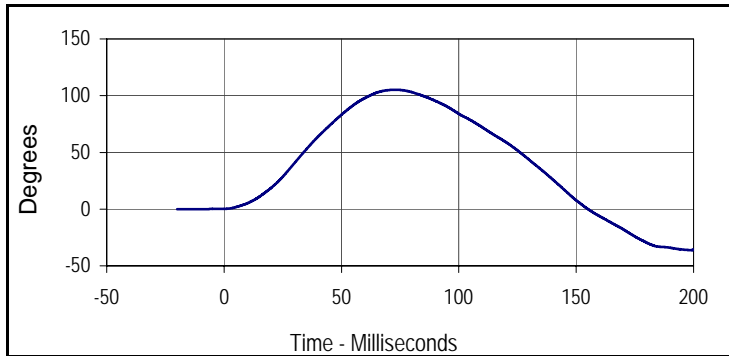

Curve Description			
"D" Plane Rotation			
Plot No.	Type	SAE Class	Units
002	FIL	60	Degrees
Max	Time	Min	Time
105.2	73.0	-36.1	198.5

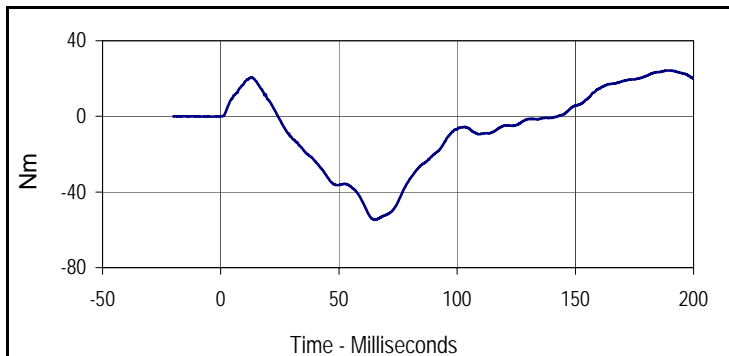

Curve Description			
Moment About Occipital Condyle			
Plot No.	Type	SAE Class	Units
003	FIL	600	Nm
Max	Time	Min	Time
24.3	190.2	-54.7	65.2


Test Program: Hybrid III 5th Percentile Female Neck Extension Test

Test Date: 1/17/13




ATD Serial No.: 141

Test I.D.: F141NE053

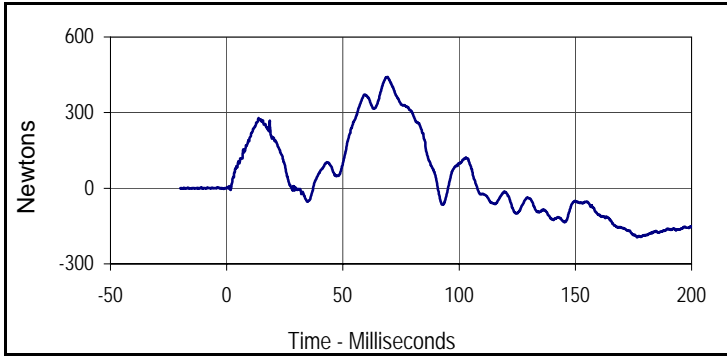

Curve Description			
Upper Neck Force X			
Plot No.	Type	SAE Class	Units
004	FIL	1000	Newtons
Max	Time	Min	Time
441.4	69.2	-194.9	176.6

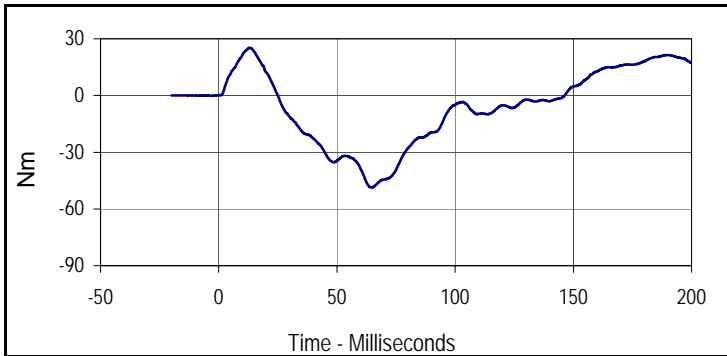

Curve Description			
Neck Moment Y			
Plot No.	Type	SAE Class	Units
005	FIL	600	Nm
Max	Time	Min	Time
25.3	12.9	-48.7	64.8

Test Program: Hybrid III 5th Percentile Female Thorax Impact Test


Test Date: 1/17/13




ATD Serial No.: 141

Test I.D.: F141CH053


Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥240	460	Pass
Temperature During Soak	Max	20.6 to 22.2	21.8	Pass
	Min		20.6	Pass
Humidity During Soak	Max	10.0 to 70.0	30.2	Pass
	Min		24.2	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	29.7	Pass
Probe Velocity	m/s	6.59 to 6.83	6.68	Pass
Peak Chest Deflection	mm	50.0 to 58.0	54.4	Pass
Peak Force Between 50 and 58 MM	Newtons	3900 to 4400	4044	Pass
Peak Force Between 18 and 50 MM	Newtons	≤4600	4056	Pass
Internal Hysteresis	%	69 to 85	73.4	Pass
Overall Test Results				Pass

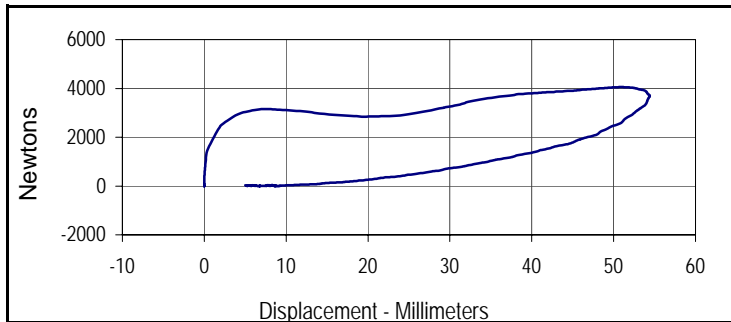


Curve Description			
Probe Force vs. Chest Deflection			
Plot No.	Type	SAE Class	Hysteresis
001	FIL	180	73.4
Peak Probe Force		Peak Chest Deflection	
4055.8		54.4	

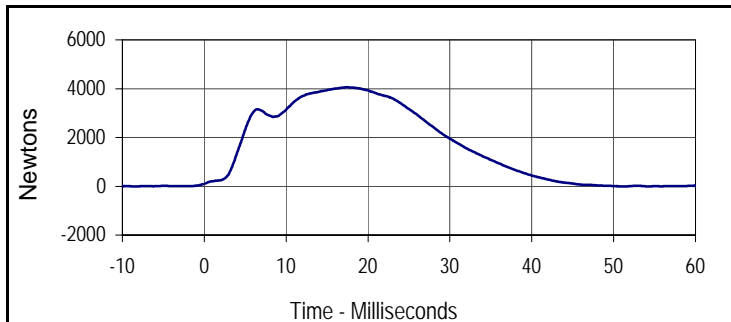

Curve Description			
Probe Force			
Plot No.	Type	SAE Class	Units
002	FIL	180	Newtons
Max	Time	Min	Time
4055.8	17.4	-5.1	51.3

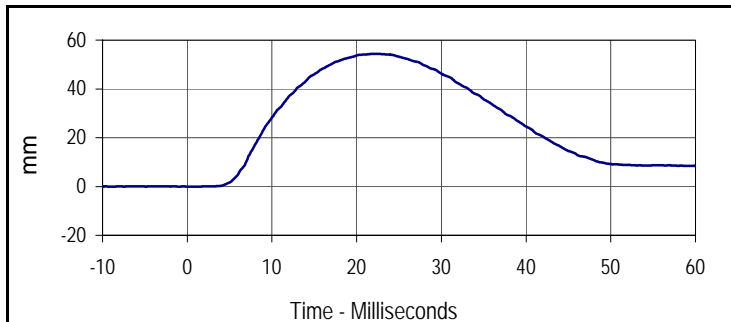

Curve Description			
Chest Deflection			
Plot No.	Type	SAE Class	Units
003	FIL	600	mm
Max	Time	Min	Time
54.4	22.2	0.0	1.3

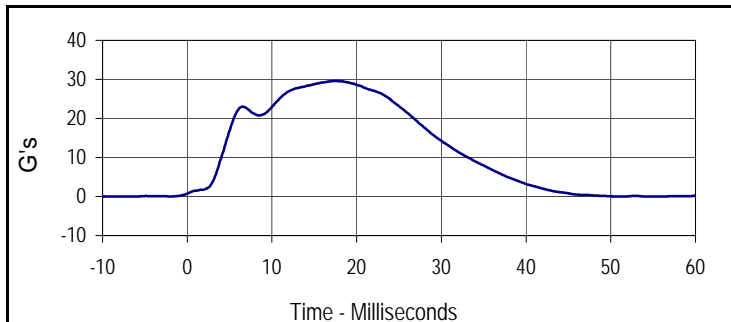

Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
004	FIL	180	G's
Max	Time	Min	Time
29.6	17.4	0.0	51.3

Test Program: Hybrid III 5th Percentile Female Knee Impact Test

Test Date: 1/17/13



ATD Serial No.: 141


Test I.D.: F141LK053, F141RK053

Left Knee


Tested Parameter	Units	Specification	Result	Pass/Fail
Knee Assembly Soak Time	Minutes	≥240	490	Pass
Temperature During Soak	Max	18.9 to 25.6	21.8	Pass
	Min		20.6	Pass
Humidity During Soak	Max	10.0 to 70.0	30.2	Pass
	Min		24.2	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	29.7	Pass
Pendulum Velocity at T=0	m/sec	2.07 to 2.13	2.10	Pass
Peak Probe Force	Newtons	3450 to 4060	3980	Pass
Overall Test Results				Pass

Right Knee


Pendulum Velocity at T=0	m/sec	2.07 to 2.13	2.11	Pass
Peak Probe Force	Newtons	3450 to 4060	3733	Pass
Overall Test Results				Pass

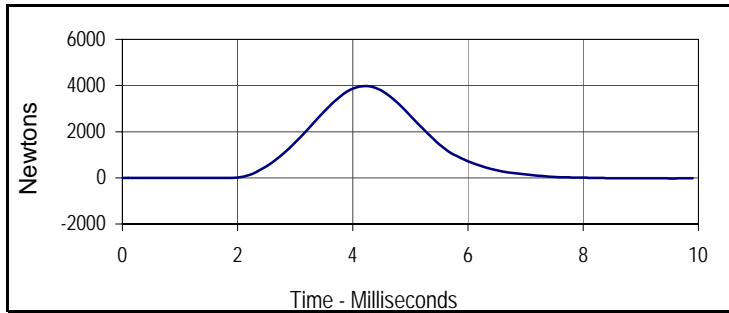


Curve Description			
Left Knee Probe Force			
Plot No.	Type	SAE Class	Units
001	FIL	600	Newtons
Max	Time	Min	Time
3979.6	4.2	-24.7	9.6

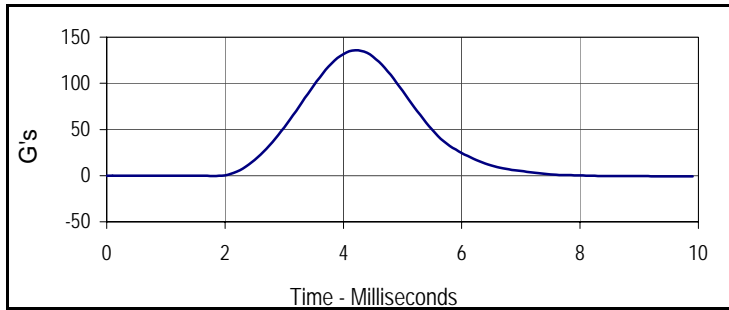

Curve Description			
Left Knee Acceleration			
Plot No.	Type	SAE Class	Units
002	FIL	600	G's
Max	Time	Min	Time
135.8	4.2	-0.8	9.6

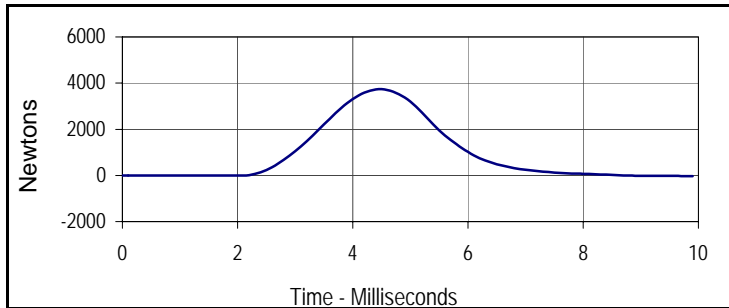

Curve Description			
Right Knee Probe Force			
Plot No.	Type	SAE Class	Units
003	FIL	600	Newtons
Max	Time	Min	Time
3733.3	4.5	-36.1	9.9

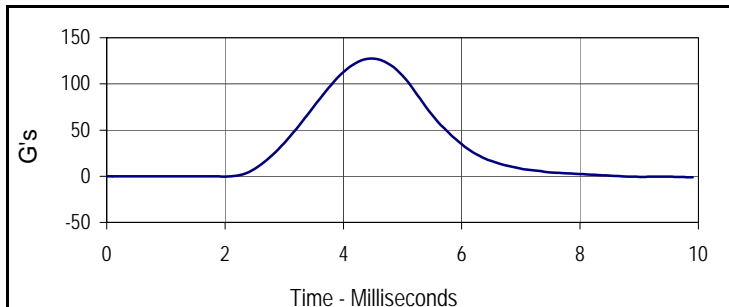

Curve Description			
Right Knee Acceleration			
Plot No.	Type	SAE Class	Units
004	FIL	600	G's
Max	Time	Min	Time
127.4	4.5	-1.2	9.9

Test Program: Hybrid III 5th Percentile Female Torso Flexion Test

Test Date: 1/17/13



ATD Serial No.: 141

Test I.D.: F141TF053

Left Hip Joint-Femur Results

Tested Parameter		Units	Specification	Result	Pass/Fail
Dummy Soak Time		Minutes	≥240	515	Pass
Temperature During Soak	Max	°C	18.9 to 25.6	21.8	Pass
	Min	°C		20.6	Pass
Humidity During Soak	Max	%	10.0 to 70.0	30.2	Pass
	Min	%		24.2	Pass
Laboratory Temperature During Test		°C	18.9 to 25.6	21.2	Pass
Laboratory Humidity During Test		%	10.0 to 70.0	29.7	Pass
Initial Reference Plane Angle		Degrees	≤ 20	4.1	Pass
Peak Force at 45° +/-0.5°		Newtons	320.0 to 390.0	345.1	Pass
Torso Rotation Rate		deg/sec	0.5 to 1.5	1.0	Pass
Final Reference Plane Angle		Degrees	+/-8	3.4	Pass
Overall Test Results					Pass

APPENDIX C
POST-TEST / ATD CONFIGURATION AND PERFORMANCE VERIFICATION DATA

Test Program: Hybrid III 50th Percentile Male Dummy Damage Checklist

Test Date: 2/22/13



ATD Serial No.: 034

Test I.D.: N/A

Dummy Item	Inspect for	Comments	Damaged	OK
Entire Dummy	Perform general cleaning			X
Outer Skin	Gashes, rips, cracks			X
Head	Ballast secure			X
	General appearance			X
Neck	Broken or cracked rubber			X
	Upper neck bracket firmly attached to the lower neck bracket			X
	Looseness at the condyle joint			X
	Nodding blocks cracked or out of position			X
Spine	Broken or cracks in rubber			X
Ribs	Broken or bent ribs			X
	Broken or bent rib supports			X
	Damping material separated or cracked			X
	Rubber bumpers in place			X
Chest Displacement Assembly	Bent shaft			X
	Slider arm riding in track			X
Transducer Leads	Torn cables			X
Accelerometer Mountings	Head mounting secure			X
	Chest mounting secure			X
Knees	Skin condition			X
	Insert (do not remove)			X
	Casting			X
Limbs	Normal movement and adjustment			X
Knee Sliders	Wires intact			X
	Rubber returned to "at rest" position			X
Pelvis	Broken			X
Other				X

Describe the repair on repair or replacement of parts:

Test Program: Hybrid III 50th Percentile Male External Measurements

Test Date: 2/22/13



ATD Serial No.: 034

Test I.D.: N/A

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.13	Pass
Laboratory Relative Humidity	%	10 to 70	29.6	Pass
A - Total sitting height	mm	879 to 889	884	Pass
B - Shoulder pivot height	mm	505 to 521	512	Pass
C - H point height	mm	84 to 89	85	Pass
D - H point location from backline	mm	135 to 140	137	Pass
E - Shoulder pivot from backline	mm	84 to 94	89	Pass
F - Thigh clearance	mm	140 to 155	146	Pass
G - Back of elbow to wrist pivot	mm	290 to 305	297	Pass
H - Head back to backline	mm	41 to 46	43	Pass
I - Shoulder to elbow length	mm	330 to 345	336	Pass
J - Elbow rest height	mm	190 to 211	201	Pass
K - Buttock to knee length	mm	579 to 604	586	Pass
L - Popliteal length	mm	429 to 455	438	Pass
M - Knee pivot height	mm	485 to 500	493	Pass
N - Buttock popliteal length	mm	452 to 477	472	Pass
O - Chest depth without jacket	mm	213 to 229	225	Pass
P - Foot length	mm	251 to 267	260	Pass
V - Shoulder breadth	mm	422 to 437	433	Pass
W - Foot breadth	mm	91 to 107	99	Pass
Y - Chest circumference (with chest jacket)	mm	970 to 1001	981	Pass
Z - Waist circumference	mm	836 to 866	864	Pass
AA - Location for chest circumference	mm	429 to 434	429	Pass
BB - Location for waist circumference	mm	226 to 231	230	Pass
Overall Test Results				Pass

Test Program: Hybrid III 50th Percentile Male Head Drop Test


Test Date: 2/22/13




ATD Serial No.: 034

Test I.D.: M034HD041


Tested Parameter	Units	Specification	Result	Pass/Fail
Head Assembly Soak Time	Minutes	≥240	340	Pass
Temperature During Soak	Max	18.9 to 25.6	21.9	Pass
	Min		20.8	Pass
Humidity During Soak	Max	10.0 to 70.0	30.5	Pass
	Min		27.3	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.1	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	29.6	Pass
Peak Resultant Acceleration	G's	225.0 to 275.0	270.1	Pass
Peak Lateral Acceleration	G's	≤15.0	5.0	Pass
Oscillations After Main Pulse	%	<10% of peak Res. Acceleration	4.2	Pass
Is Acceleration Unimodal?	Yes/No	Yes	Yes	Pass
Overall Test Results				Pass

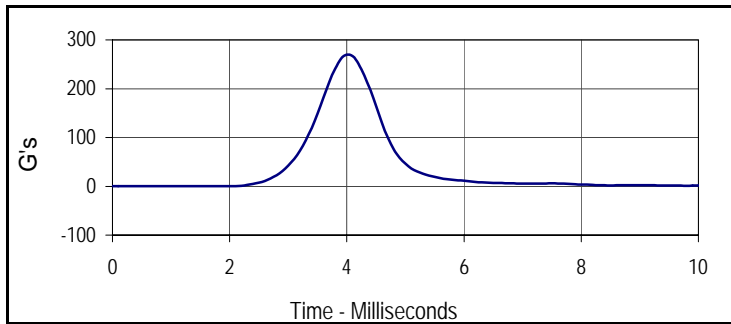


Curve Description			
Head Resultant			
Plot No.	Type	SAE Class	Units
001	RES	1000	G's
Max	Time	Min	Time
270.1	4.0	0.4	0.3

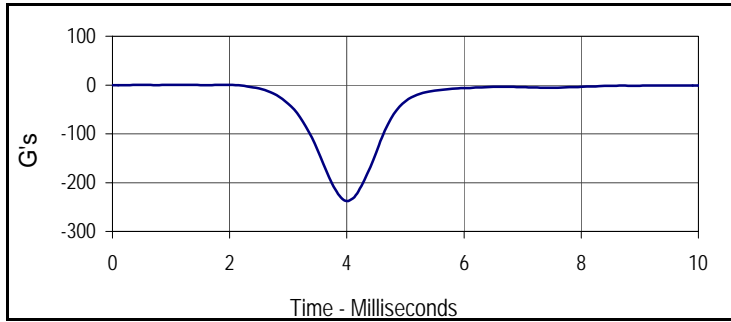

Curve Description			
Head X			
Plot No.	Type	SAE Class	Units
002	FIL	1000	G's
Max	Time	Min	Time
0.1	1.2	-237.6	4.0

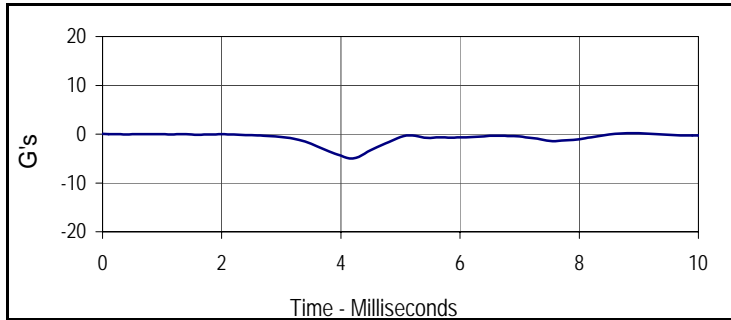

Curve Description			
Head Y			
Plot No.	Type	SAE Class	Units
003	FIL	1000	G's
Max	Time	Min	Time
0.0	0.0	-5.0	4.2

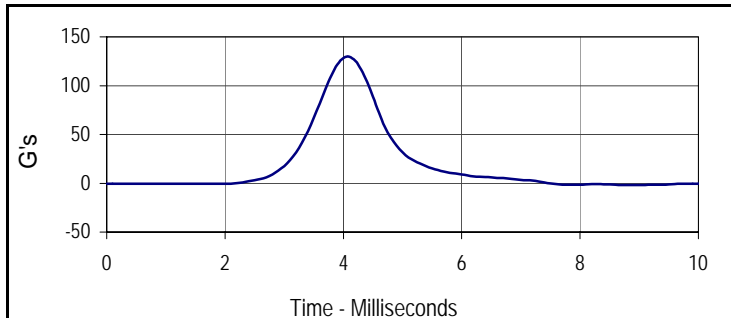

Curve Description			
Head Z			
Plot No.	Type	SAE Class	Units
004	FIL	1000	G's
Max	Time	Min	Time
129.5	4.1	-1.4	7.8

Test Program: Hybrid III 50th Percentile Male Neck Flexion Test


Test Date: 2/22/13




ATD Serial No.: 034

Test I.D.: M034NF041


Tested Parameter	Units	Specification	Result	Pass/Fail	
Neck Assembly Soak Time	Minutes	≥240	390	Pass	
Temperature During Soak	Max	20.6 to 22.2	21.9	Pass	
	Min		20.8	Pass	
Humidity During Soak	Max	10.0 to 70.0	30.5	Pass	
	Min		27.3	Pass	
Laboratory Temperature During Test	°C	20.6 to 22.2	21.1	Pass	
Laboratory Humidity During Test	%	10.0 to 70.0	29.6	Pass	
Pendulum Velocity	m/s	6.89 to 7.13	6.93	Pass	
Pendulum Deceleration	10 Msec.	G's	22.5 to 27.5	23.5	Pass
	20 Msec.	G's	17.6 to 22.6	19.8	Pass
	30 Msec.	G's	12.5 to 18.5	17.5	Pass
Peak Pendulum Decel. after 30 Msec.	G's	≤ 29.0	17.5	Pass	
Deceleration Decay, Time to Cross 5 G's	Msec.	34.0 to 42.0	36.6	Pass	
Maximum "D" Plane Rotation	Max	Degrees	64.0 to 78.0	71.4	Pass
	Time	Msec.	57.0 to 64.0	62.8	Pass
"D" Plane Rotation Decay, Time To Zero Crossing	Msec.	113.0 to 128.0	123.7	Pass	
Moment About Occ. Condyle	Max	Nm	88.1 to 108.5	88.7	Pass
	Time	Msec.	47.0 to 58.0	53.9	Pass
Positive Moment Decay, Time To Zero Crossing	Msec.	97.0 to 107.0	98.7	Pass	
Overall Test Results				Pass	

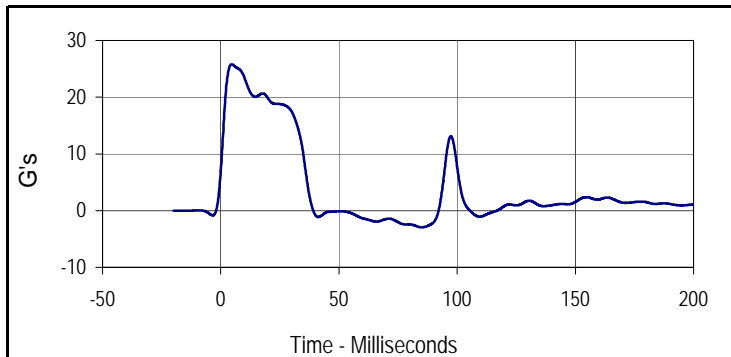

Curve Description			
Pendulum Deceleration			
Plot No.	Type	SAE Class	Units
001	FIL	60	G's
Max	Time	Min	Time
25.8	4.6	-2.9	84.9

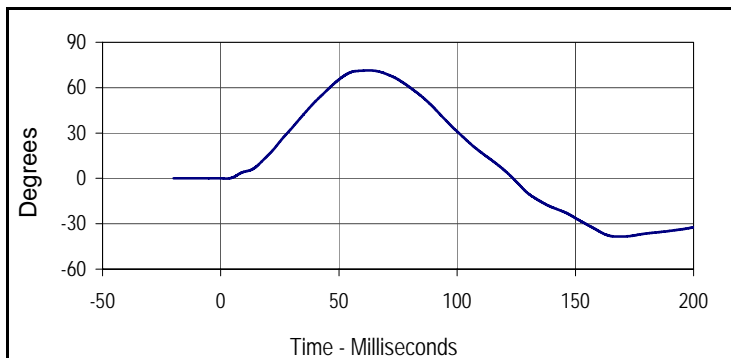

Curve Description			
"D" Plane Rotation			
Plot No.	Type	SAE Class	Units
002	FIL	60	Degrees
Max	Time	Min	Time
71.4	62.8	-38.5	168.6

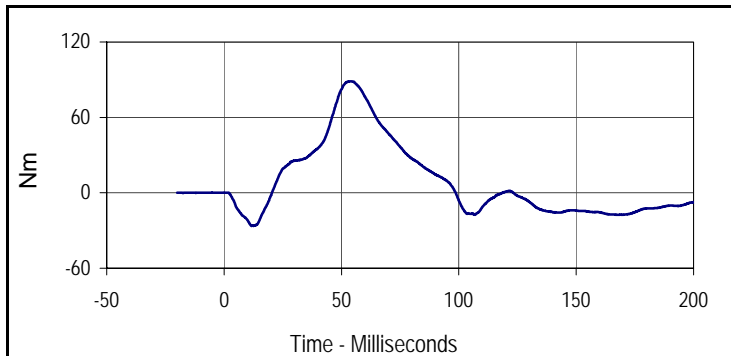

Curve Description			
Moment About Occipital Condyle			
Plot No.	Type	SAE Class	Units
003	FIL	600	Nm
Max	Time	Min	Time
88.7	53.9	-26.5	12.5


Test Program: Hybrid III 50th Percentile Male Neck Flexion Test

Test Date: 2/22/13




ATD Serial No.: 034

Test I.D.: M034NF041

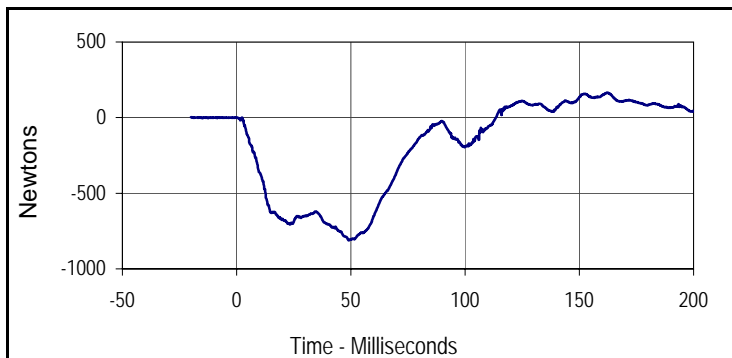

Curve Description			
Neck Force X			
Plot No.	Type	SAE Class	Units
004	FIL	1000	Newtons
Max	Time	Min	Time
164.7	162.2	-812.4	49.1

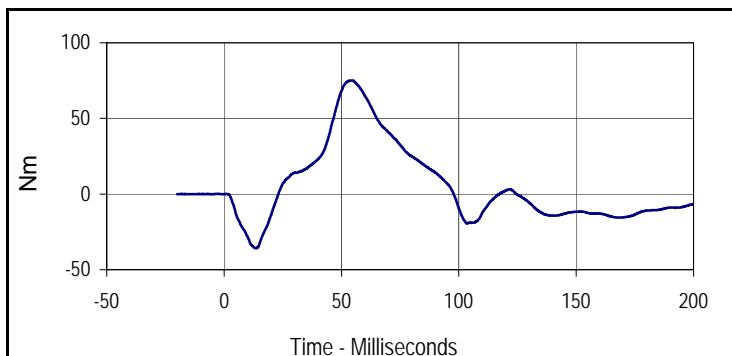

Curve Description			
Neck Moment Y			
Plot No.	Type	SAE Class	Units
005	FIL	600	Nm
Max	Time	Min	Time
75.1	54.4	-35.8	13.5

Test Program: Hybrid III 50th Percentile Male Neck Extension Test


Test Date: 2/22/13




ATD Serial No.: 034

Test I.D.: M034NE041


Tested Parameter	Units	Specification	Result	Pass/Fail	
Neck Assembly Soak Time	Minutes	≥240	425	Pass	
Temperature During Soak	Max	20.6 to 22.2	21.9	Pass	
	Min		20.8	Pass	
Humidity During Soak	Max	10.0 to 70.0	30.5	Pass	
	Min		27.3	Pass	
Laboratory Temperature During Test	°C	20.6 to 22.2	21.2	Pass	
Laboratory Humidity During Test	%	10.0 to 70.0	29.5	Pass	
Pendulum Velocity	m/s	5.94 to 6.19	6.00	Pass	
Pendulum Deceleration	10 Msec.	G's	17.2 to 21.2	20.4	Pass
	20 Msec.	G's	14.0 to 19.0	18.0	Pass
	30 Msec.	G's	11.0 to 16.0	15.8	Pass
Peak Pendulum Decel. after 30 Msec.	G's	≤ 22.0	15.8	Pass	
Deceleration Decay, Time to Cross 5 G's	Msec.	38.0 to 46.0	41.1	Pass	
Maximum "D" Plane Rotation	Max	Degrees	81.0 to 106.0	94.7	Pass
	Time	Msec.	72.0 to 82.0	78.6	Pass
"D" Plane Rotation Decay, Time To Zero Crossing	Msec.	147.0 to 174.0	158.8	Pass	
Moment About Occ. Condyle	Max	Nm	-52.9 to -79.9	-77.5	Pass
	Time	Msec.	65.0 to 79.0	66.4	Pass
Positive Moment Decay, Time To Zero Crossing	Msec.	120.0 to 148.0	134.8	Pass	
Overall Test Results				Pass	

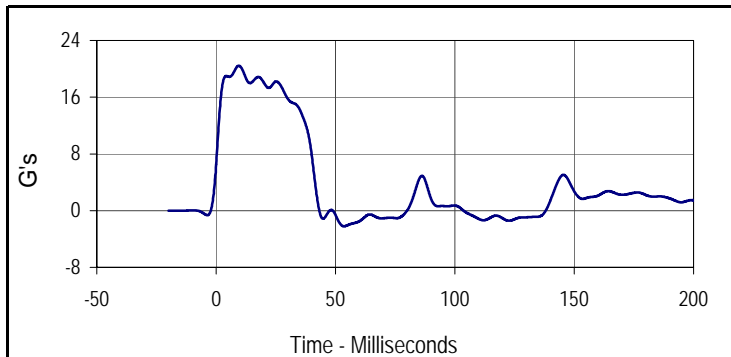

Curve Description			
Pendulum Deceleration			
Plot No.	Type	SAE Class	Units
001	FIL	60	G's
Max	Time	Min	Time
20.4	9.5	-2.2	53.6

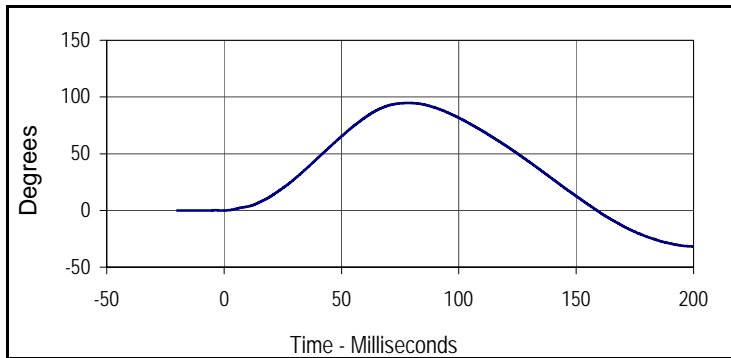

Curve Description			
"D" Plane Rotation			
Plot No.	Type	SAE Class	Units
002	FIL	60	Degrees
Max	Time	Min	Time
94.7	78.6	-31.8	200.0

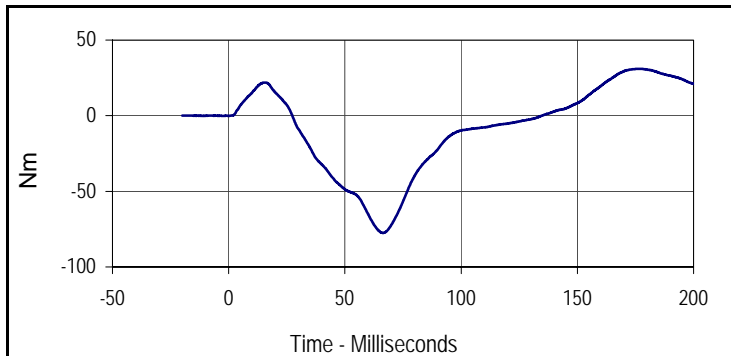

Curve Description			
Moment About Occipital Condyle			
Plot No.	Type	SAE Class	Units
003	FIL	600	Nm
Max	Time	Min	Time
31.0	177.2	-77.5	66.4


Test Program: Hybrid III 50th Percentile Male Neck Extension Test

Test Date: 2/22/13




ATD Serial No.: 034

Test I.D.: M034NE041

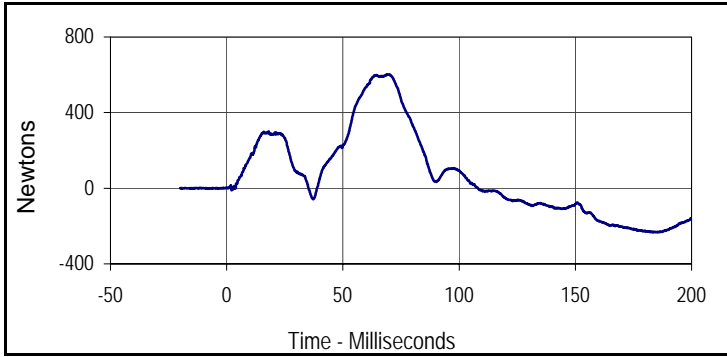


Curve Description			
Neck Force X			
Plot No.	Type	SAE Class	Units
004	FIL	1000	Newtons
Max	Time	Min	Time
602.5	69.6	-232.9	184.6

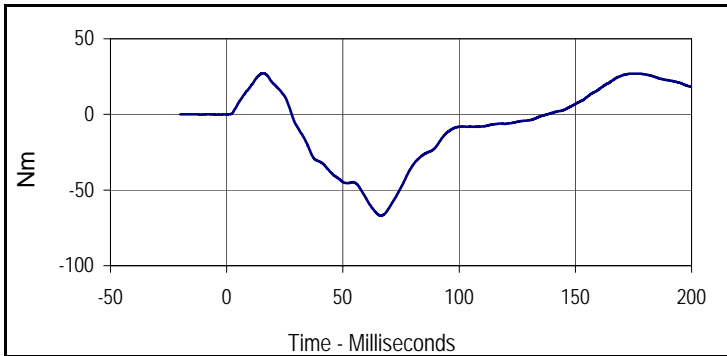


Curve Description			
Neck Moment Y			
Plot No.	Type	SAE Class	Units
005	FIL	600	Nm
Max	Time	Min	Time
27.1	15.3	-67.0	66.4




Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥240	475	Pass
Temperature During Soak	Max	20.6 to 22.2	21.9	Pass
	Min		20.8	Pass
Humidity During Soak	Max	10.0 to 70.0	30.5	Pass
	Min		27.3	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	29.6	Pass
Probe Velocity	m/s	6.58 to 6.82	6.69	Pass
Peak Probe Force	Newtons	5159 to 5893	5451	Pass
Peak Sternum Deflection	CM	6.35 to 7.26	6.83	Pass
Internal Hysteresis	%	69 to 85	70.3	Pass
Overall Test Results				Pass

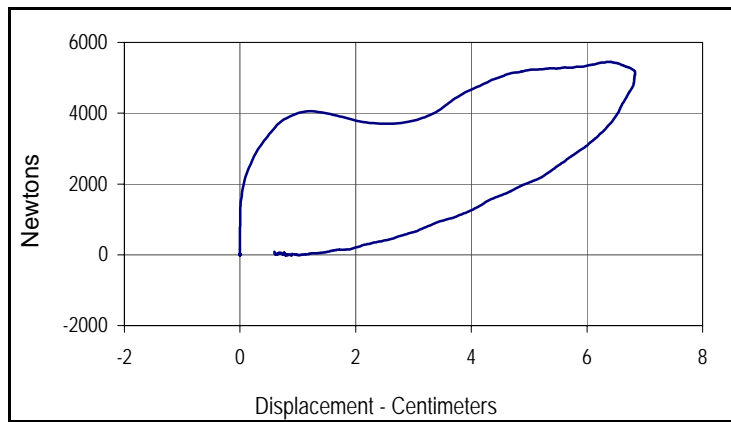

Curve Description			
Probe Force vs. Chest Deflection			
Plot No.	Type	SAE Class	Hysteresis
001	FIL	600	70.3
Peak Probe Force		Peak Chest Deflection	
5451		6.83	

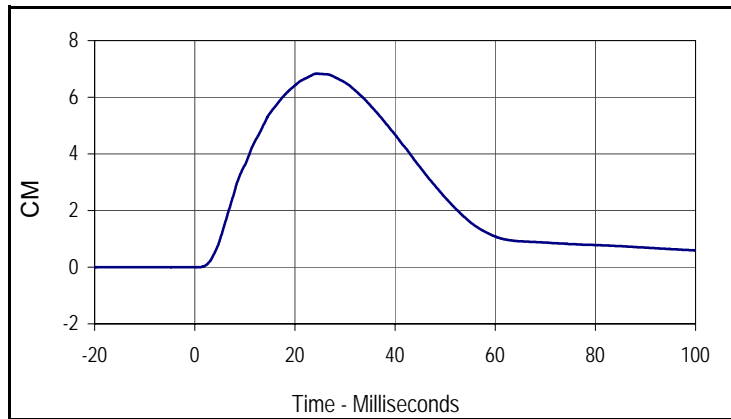

Curve Description			
Chest Deflection			
Plot No.	Type	SAE Class	Units
002	FIL	600	CM
Max	Time	Min	Time
6.8	24.5	0.0	-2.7

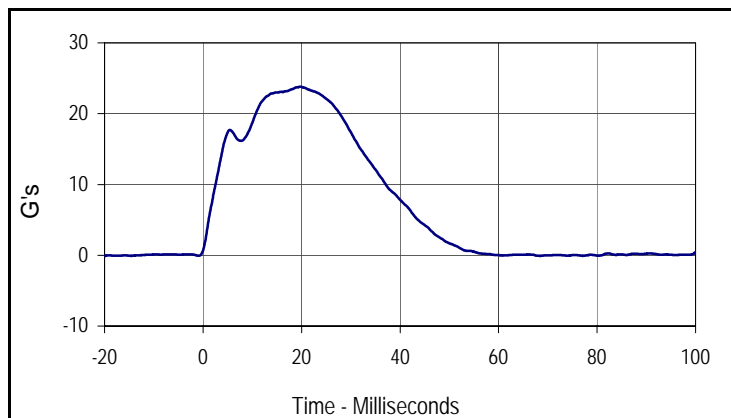

Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
003	FIL	600	G's
Max	Time	Min	Time
23.8	19.7	-0.1	-20.0

Test Program: Hybrid III 50th Percentile Male Knee Impact Test

Test Date: 2/22/13



ATD Serial No.: 034


Test I.D.: M034LK041, M034RK041

Left Knee

Tested Parameter	Units	Specification	Result	Pass/Fail
Knee Assembly Soak Time	Minutes	≥240	510	Pass
Temperature During Soak	Max	18.9 to 25.6	21.9	Pass
	Min		20.8	Pass
Humidity During Soak	Max	10.0 to 70.0	30.5	Pass
	Min		27.3	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.1	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	29.6	Pass
Pendulum Velocity at T=0	m/sec	2.07 to 2.13	2.10	Pass
Peak Probe Force	Newtons	4715 to 5782	5388	Pass
Overall Test Results				Pass

Right Knee

Pendulum Velocity at T=0	m/sec	2.07 to 2.13	2.11	Pass
Peak Probe Force	Newtons	4715 to 5782	5460	Pass
Overall Test Results				Pass

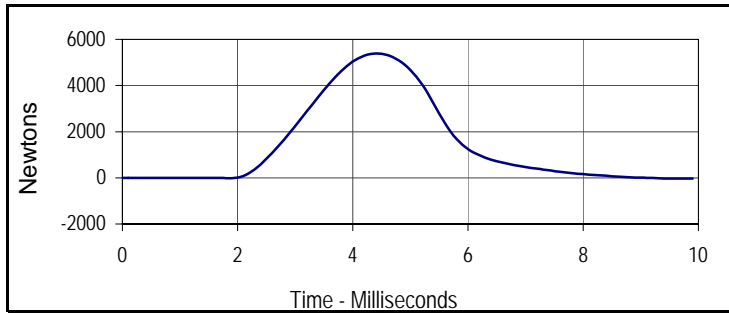


Curve Description			
Left Knee Probe Force			
Plot No.	Type	SAE Class	Units
001	FIL	600	Newtons
Max	Time	Min	Time
5388.4	4.4	-36.6	9.9



Curve Description			
Left Knee Acceleration			
Plot No.	Type	SAE Class	Units
002	FIL	600	G's
Max	Time	Min	Time
110.1	4.4	-0.7	9.9



Curve Description			
Right Knee Probe Force			
Plot No.	Type	SAE Class	Units
003	FIL	600	Newtons
Max	Time	Min	Time
5459.6	4.6	-43.9	9.9

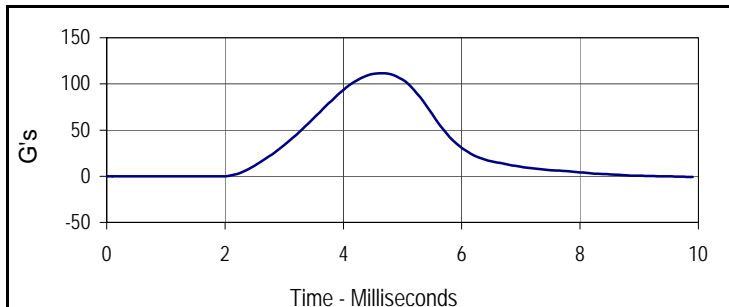

Curve Description			
Right Knee Acceleration			
Plot No.	Type	SAE Class	Units
004	FIL	600	G's
Max	Time	Min	Time
111.6	4.6	-0.9	9.9




Left Hip Joint-Femur Results


Tested Parameter	Units	Specification	Result	Pass/Fail
Hip Joint-Femur Assembly Soak Time	Minutes	≥240	560	Pass
Temperature During Soak	Max	18.9 to 25.6	21.9	Pass
	Min		20.8	Pass
Humidity During Soak	Max	10.0 to 70.0	30.5	Pass
	Min		27.3	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.1	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	29.6	Pass
Rotation Rate	deg/sec	5 to 10	7.6	Pass
Femur Torque at 30°	Nm	≤ 95	89.8	Pass
Rotation at 203 Nm	Degrees	40.0 to 50.0	48.4	Pass
Overall Test Results				Pass

Right Hip Joint-Femur Results


Rotation Rate	deg/sec	5 to 10	7.5	Pass
Femur Torque at 30°	Nm	≤ 95	87.3	Pass
Rotation at 203 Nm	Degrees	40.0 to 50.0	48.4	Pass
Overall Test Results				Pass

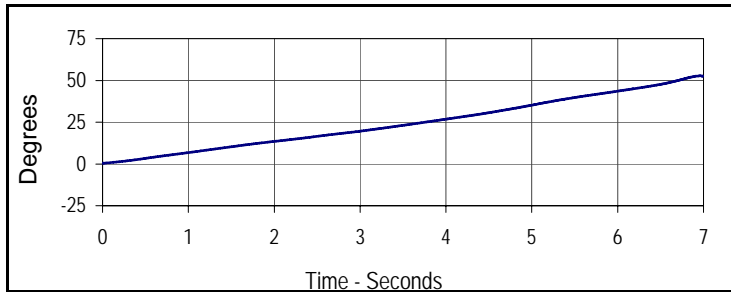


Curve Description			
Left Hip-Femur Rotation			
Plot No.	Type	SAE Class	Units
001	FIL	60	Degrees
Max	Time	Min	Time
52.7	7.0	0.4	0.0

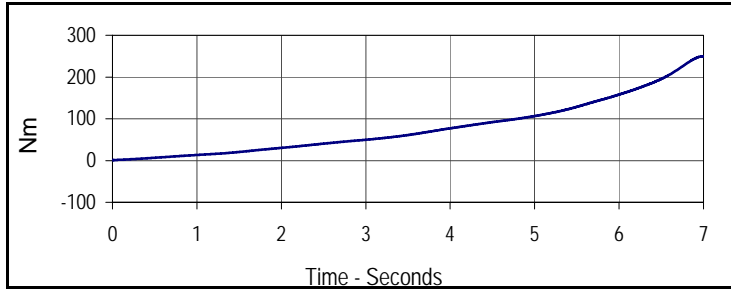

Curve Description			
Left Femur Torque			
Plot No.	Type	SAE Class	Units
002	FIL	600	Nm
Max	Time	Min	Time
249.4	7.0	1.0	0.0

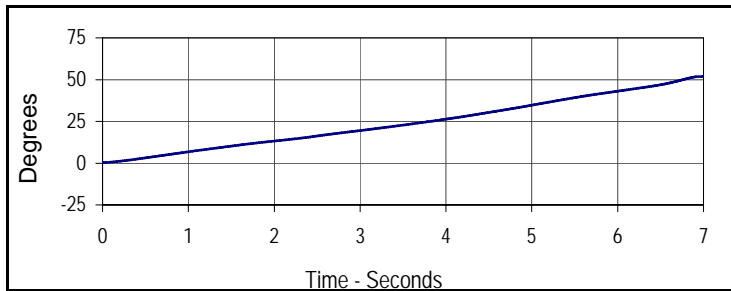

Curve Description			
Right Hip-Femur Rotation			
Plot No.	Type	SAE Class	Units
003	FIL	60	Degrees
Max	Time	Min	Time
51.9	7.0	0.2	0.0

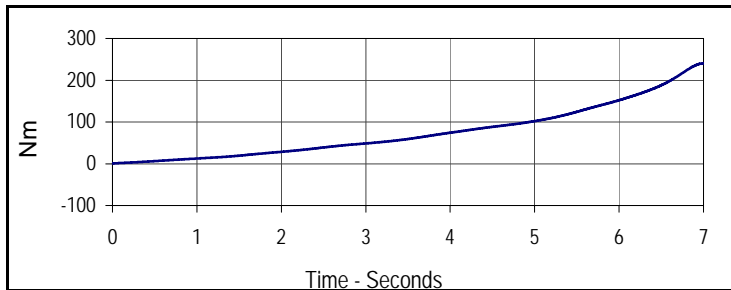

Curve Description			
Right Femur Torque			
Plot No.	Type	SAE Class	Units
004	FIL	600	Nm
Max	Time	Min	Time
240.0	7.0	1.0	0.0

Test Program: Hybrid III 5th Percentile Female Dummy Damage Checklist

Test Date: 2/25/13



ATD Serial No.: 141

Test I.D.: N/A

Dummy Item	Inspect for	Comments	Damaged	OK
Entire Dummy	Perform general cleaning			X
Outer Skin	Gashes, rips, cracks			X
Head	Ballast secure			X
	General appearance			X
Neck	Broken or cracked rubber			X
	Upper neck bracket firmly attached to the lower neck bracket			X
	Looseness at the condyle joint			X
	Nodding blocks cracked or out of position			X
Spine	Broken or cracks in rubber			X
Ribs	Broken or bent ribs			X
	Broken or bent rib supports			X
	Damping material separated or cracked			X
	Rubber bumpers in place			X
Chest Displacement Assembly	Bent shaft			X
	Slider arm riding in track			X
Transducer Leads	Torn cables			X
Accelerometer Mountings	Head mounting secure			X
	Chest mounting secure			X
Knees	Skin condition			X
	Insert (do not remove)			X
	Casting			X
Limbs	Normal movement and adjustment			X
Knee Sliders	Wires intact			X
	Rubber returned to "at rest" position			X
Pelvis	Broken			X
Other				X

Describe the repair on repair or replacement of parts:

Test Program: Hybrid III 5th Percentile Female External Measurements

Test Date: 2/25/13



ATD Serial No.: 141

Test I.D.: N/A

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	29.7	Pass
A - Total sitting height	mm	774.7 to 800.1	784	Pass
B - Shoulder pivot height	mm	431.8 to 457.2	450	Pass
C - H point height	mm	81.3 to 86.3	85	Pass
D - H point location from backline	mm	144.8 to 149.8	146	Pass
E - Shoulder pivot from backline	mm	68.6 to 83.8	77	Pass
F - Thigh clearance	mm	119.4 to 134.6	126	Pass
G - Back of elbow to wrist pivot	mm	243.9 to 259.1	250	Pass
H - Head back to backline	mm	40.7 to 45.7	44	Pass
I - Shoulder to elbow length	mm	276.8 to 297.2	285	Pass
J - Elbow rest height	mm	182.8 to 203.2	197	Pass
K - Buttock to knee length	mm	520.7 to 546.1	531	Pass
L - Popliteal length	mm	355.6 to 376.0	371	Pass
M - Knee pivot height	mm	393.7 to 419.1	401	Pass
N - Buttock popliteal length	mm	414.0 to 439.4	420	Pass
O - Chest depth without jacket	mm	175.3 to 190.5	185	Pass
P - Foot length	mm	218.5 to 233.7	221	Pass
R - Buttock to Knee Pivot Length	mm	457.2 to 482.6	473	Pass
S - Head Breadth	mm	137.1 to 147.3	144	Pass
T - Head Depth	mm	177.8 to 188.0	180	Pass
U - Hip Breadth	mm	299.7 to 314.9	302	Pass
V - Shoulder breadth	mm	350.5 to 365.7	359	Pass
W - Foot breadth	mm	78.8 to 94.0	90	Pass
X - Head circumference	mm	528.3 to 548.7	541	Pass
Y - Chest circumference (with chest jacket)	mm	850.8 to 881.3	864	Pass
Z - Waist circumference	mm	759.5 to 789.9	768	Pass
AA - Location for chest circumference	mm	299.7 to 309.9	300	Pass
BB - Location for waist circumference	mm	160.1 to 170.2	165	Pass
Overall Test Results				Pass

Test Program: Hybrid III 5th Percentile Female Head Drop Test


Test Date: 2/25/13




ATD Serial No.: 141

Test I.D.: F141HD054


Tested Parameter	Units	Specification	Result	Pass/Fail
Head Assembly Soak Time	Minutes	≥240	320	Pass
Temperature During Soak	Max	18.9 to 25.6	21.8	Pass
	Min		20.8	Pass
Humidity During Soak	Max	10.0 to 70.0	30.3	Pass
	Min		28.5	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	29.7	Pass
Peak Resultant Acceleration	G's	250.0 to 300.0	277.9	Pass
Peak Lateral Acceleration	G's	≤15.0	3.1	Pass
Oscillations After Main Pulse	%	<10% of peak Res. Acceleration	1.9	Pass
Is Acceleration Unimodal?	Yes/No	Yes	Yes	Pass
Overall Test Results				Pass

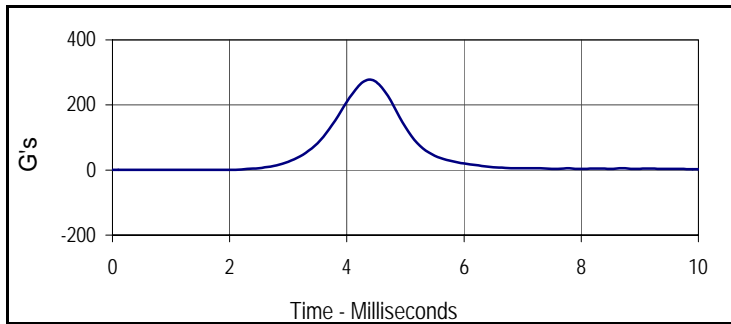


Curve Description			
Head Resultant			
Plot No.	Type	SAE Class	Units
001	RES	1000	G's
Max	Time	Min	Time
277.9	4.4	0.5	0.7

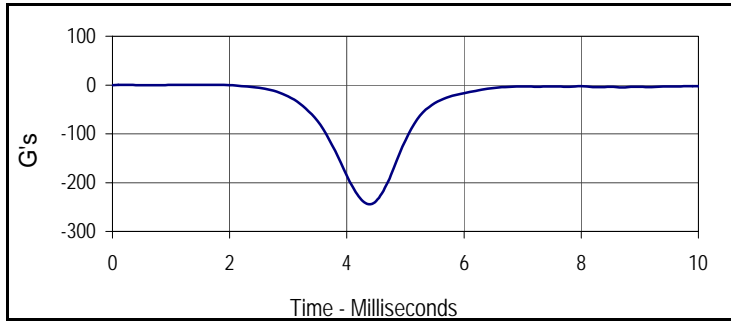

Curve Description			
Head X			
Plot No.	Type	SAE Class	Units
002	FIL	1000	G's
Max	Time	Min	Time
0.1	1.8	-243.9	4.4

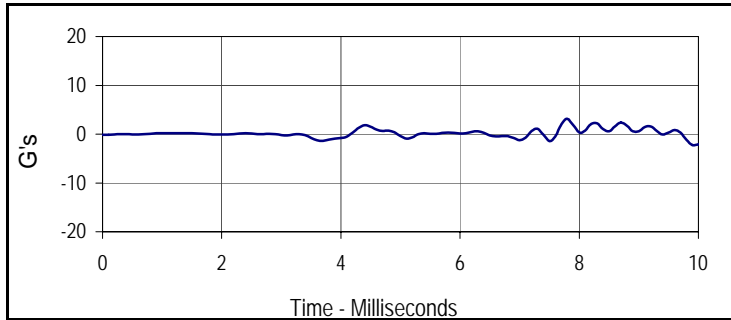

Curve Description			
Head Y			
Plot No.	Type	SAE Class	Units
003	FIL	1000	G's
Max	Time	Min	Time
3.1	7.8	-1.4	7.5

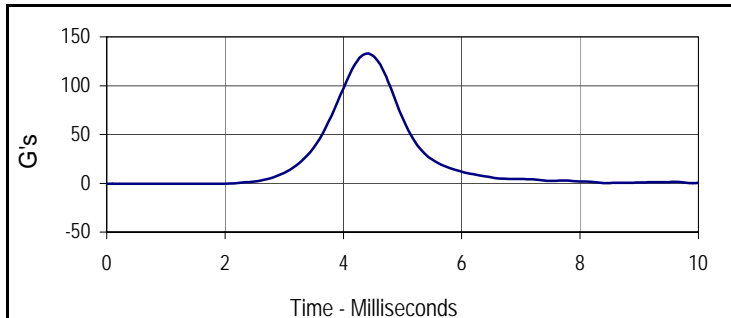

Curve Description			
Head Z			
Plot No.	Type	SAE Class	Units
004	FIL	1000	G's
Max	Time	Min	Time
133.0	4.4	-0.6	1.0

Test Program: Hybrid III 5th Percentile Female Neck Flexion Test


Test Date: 2/25/13




ATD Serial No.: 141

Test I.D.: F141NF054


Tested Parameter	Units	Specification	Result	Pass/Fail	
Neck Assembly Soak Time	Minutes	≥240	375	Pass	
Temperature During Soak	Max	20.6 to 22.2	21.8	Pass	
	Min		20.8	Pass	
Humidity During Soak	Max	10.0 to 70.0	30.3	Pass	
	Min		28.5	Pass	
Laboratory Temperature During Test	°C	20.6 to 22.2	21.2	Pass	
Laboratory Humidity During Test	%	10.0 to 70.0	29.7	Pass	
Pendulum Velocity	m/s	6.89 to 7.13	6.97	Pass	
Pendulum Deceleration	10 Msec.	m/s	2.1 to 2.5	2.5	Pass
	20 Msec.	m/s	4.0 to 5.0	4.8	Pass
	30 Msec.	m/s	5.8 to 7.0	6.9	Pass
"D" Plane Rotation	Max	Degrees	77.0 to 91.0	82.6	Pass
Peak Moment in Rotation	Max	Nm	69.0 to 83.0	82.4	Pass
Positive Moment Decay, Time To 10 Nm	Msec.	80.0 to 100.0	83.0	Pass	
Overall Test Results				Pass	

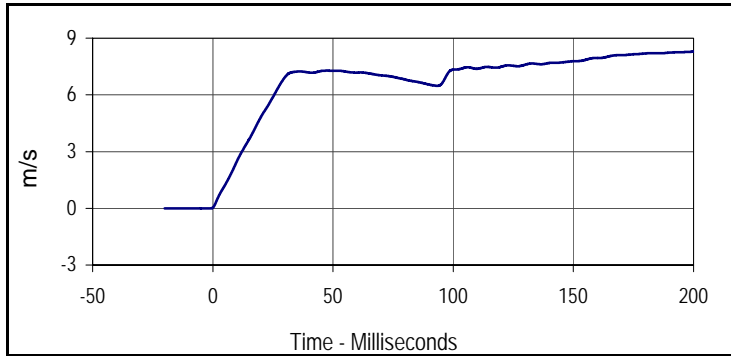

Curve Description			
Pendulum Velocity			
Plot No.	Type	SAE Class	Units
001	FIL	180	m/s
Max	Time	Min	Time
8.3	200.0	0.0	-0.9

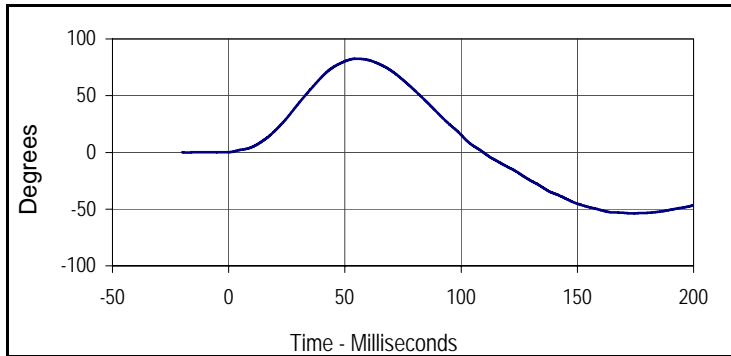

Curve Description			
"D" Plane Rotation			
Plot No.	Type	SAE Class	Units
002	FIL	60	Degrees
Max	Time	Min	Time
82.6	55.1	-53.7	173.4

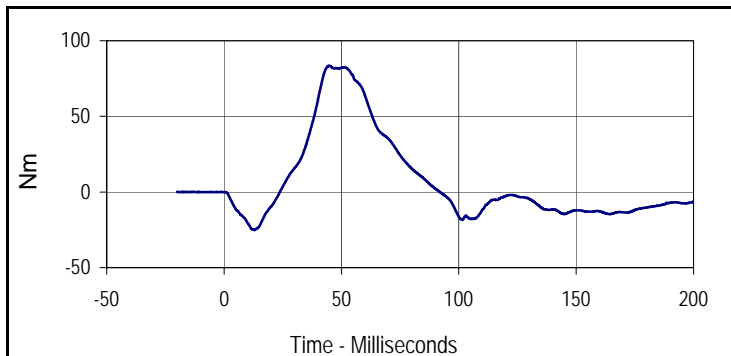

Curve Description			
Moment About Occipital Condyle			
Plot No.	Type	SAE Class	Units
003	FIL	600	Nm
Max	Time	Min	Time
83.4	44.6	-25.2	13.0


Test Program: Hybrid III 5th Percentile Female Neck Flexion Test

Test Date: 2/25/13




ATD Serial No.: 141

Test I.D.: F141NF054

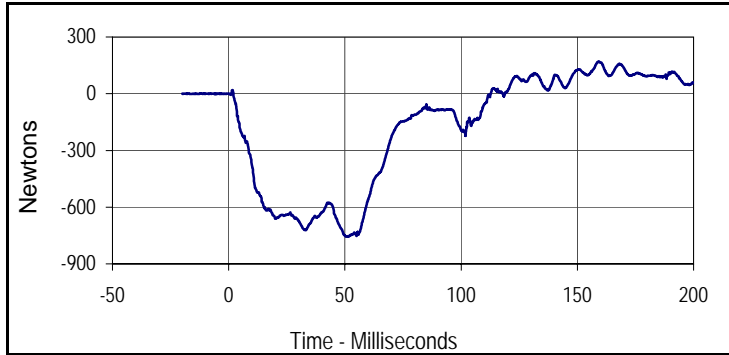

Curve Description			
Upper Neck Force X			
Plot No.	Type	SAE Class	Units
004	FIL	1000	Newtons
Max	Time	Min	Time
171.1	159.2	-756.9	50.6

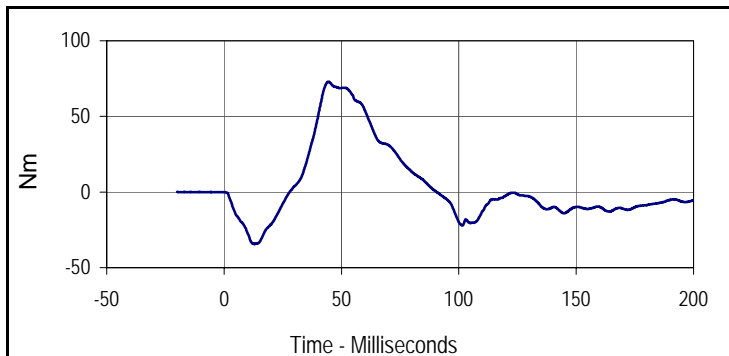


Curve Description			
Neck Moment Y			
Plot No.	Type	SAE Class	Units
005	FIL	600	Nm
Max	Time	Min	Time
72.9	44.4	-34.5	13.0

Test Program: Hybrid III 5th Percentile Female Neck Extension Test
 ATD Serial No.: 141


Test Date: 2/25/13
 Test I.D.: F141NE054




Tested Parameter	Units	Specification	Result	Pass/Fail	
Neck Assembly Soak Time	Minutes	≥240	410	Pass	
Temperature During Soak	Max	20.6 to 22.2	21.8	Pass	
	Min		20.8	Pass	
Humidity During Soak	Max	10.0 to 70.0	30.3	Pass	
	Min		28.5	Pass	
Laboratory Temperature During Test	°C	20.6 to 22.2	21.2	Pass	
Laboratory Humidity During Test	%	10.0 to 70.0	29.6	Pass	
Pendulum Velocity	m/s	5.95 to 6.19	6.15	Pass	
Pendulum Deceleration	10 Msec.	m/s	1.5 to 1.9	1.9	Pass
	20 Msec.	m/s	3.1 to 3.9	3.8	Pass
	30 Msec.	m/s	4.6 to 5.6	5.6	Pass
"D" Plane Rotation	Max	Degrees	99.0 to 114.0	108.1	Pass
Peak Moment in Rotation	Max	Nm	-53.0 to -65.0	-59.2	Pass
Positive Moment Decay, Time To -10 Nm	Msec.	94.0 to 114.0	96.5	Pass	
Overall Test Results				Pass	

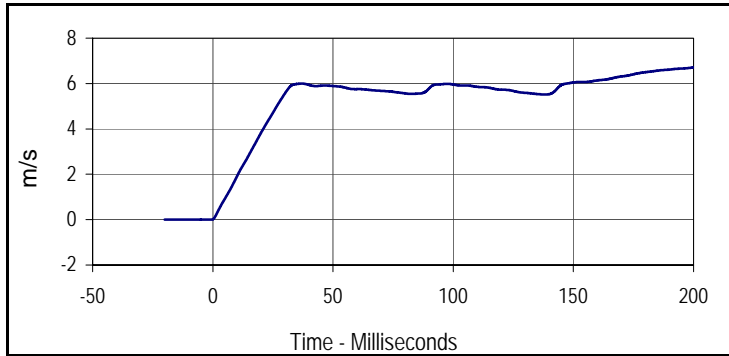

Curve Description			
Pendulum Velocity			
Plot No.	Type	SAE Class	Units
001	FIL	180	m/s
Max	Time	Min	Time
6.7	200.0	0.0	-0.9

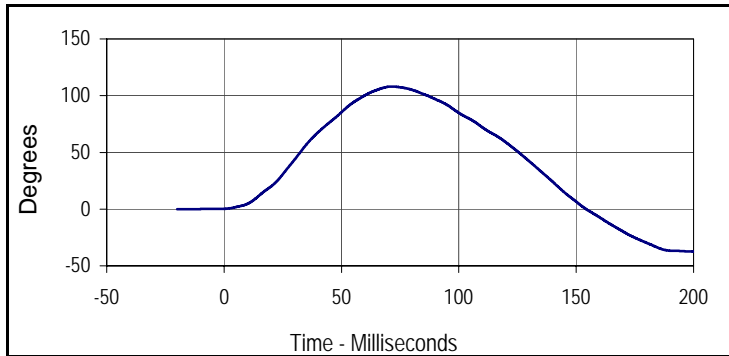

Curve Description			
"D" Plane Rotation			
Plot No.	Type	SAE Class	Units
002	FIL	60	Degrees
Max	Time	Min	Time
108.1	71.3	-37.2	198.3

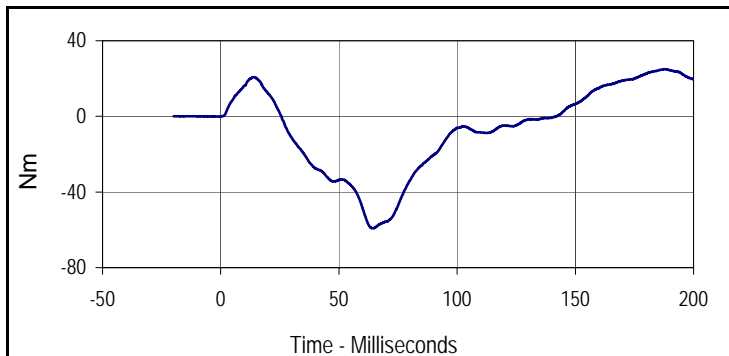

Curve Description			
Moment About Occipital Condyle			
Plot No.	Type	SAE Class	Units
003	FIL	600	Nm
Max	Time	Min	Time
25.0	188.5	-59.2	64.3


Test Program: Hybrid III 5th Percentile Female Neck Extension Test

Test Date: 2/25/13




ATD Serial No.: 141

Test I.D.: F141NE054

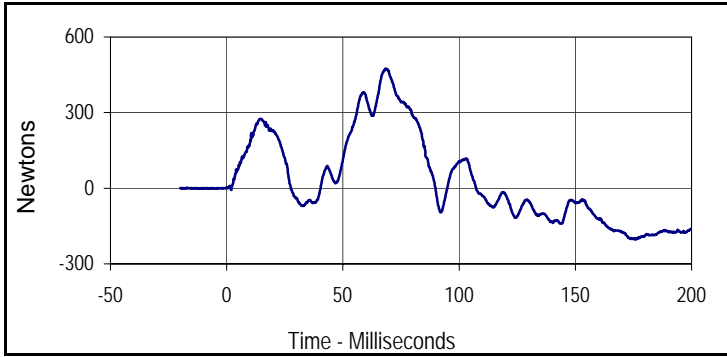

Curve Description			
Upper Neck Force X			
Plot No.	Type	SAE Class	Units
004	FIL	1000	Newtons
Max	Time	Min	Time
474.5	68.4	-203.6	175.9

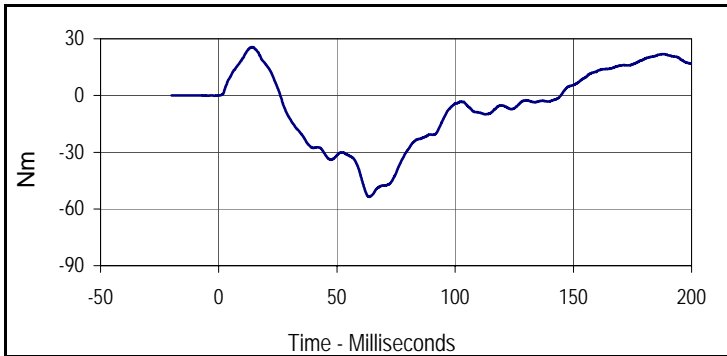

Curve Description			
Neck Moment Y			
Plot No.	Type	SAE Class	Units
005	FIL	600	Nm
Max	Time	Min	Time
25.6	14.2	-53.6	63.5

Test Program: Hybrid III 5th Percentile Female Thorax Impact Test


Test Date: 2/25/13




ATD Serial No.: 141

Test I.D.: F141CH054


Tested Parameter	Units	Specification	Result	Pass/Fail
Dummy Soak Time	Minutes	≥240	460	Pass
Temperature During Soak	Max	20.6 to 22.2	21.8	Pass
	Min		20.8	Pass
Humidity During Soak	Max	10.0 to 70.0	30.3	Pass
	Min		28.5	Pass
Laboratory Temperature During Test	°C	20.6 to 22.2	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	29.7	Pass
Probe Velocity	m/s	6.59 to 6.83	6.67	Pass
Peak Chest Deflection	mm	50.0 to 58.0	55.3	Pass
Peak Force Between 50 and 58 MM	Newtons	3900 to 4400	3941	Pass
Peak Force Between 18 and 50 MM	Newtons	≤4600	3966	Pass
Internal Hysteresis	%	69 to 85	72.8	Pass
Overall Test Results				Pass

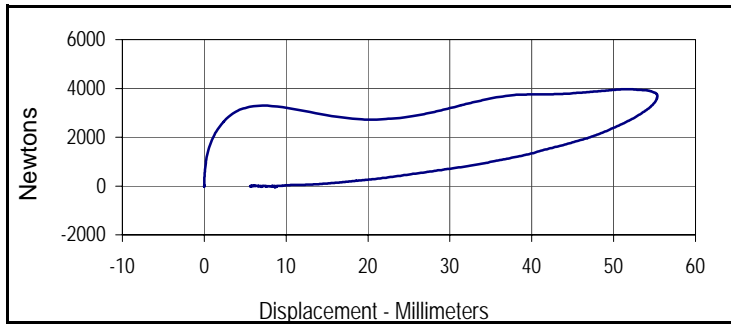


Curve Description			
Probe Force vs. Chest Deflection			
Plot No.	Type	SAE Class	Hysteresis
001	FIL	180	72.8
Peak Probe Force		Peak Chest Deflection	
3966.4		55.3	

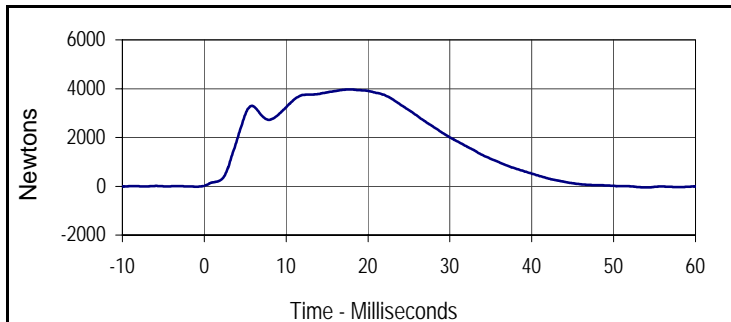

Curve Description			
Probe Force			
Plot No.	Type	SAE Class	Units
002	FIL	180	Newtons
Max	Time	Min	Time
3966.4	17.6	-48.5	54.0

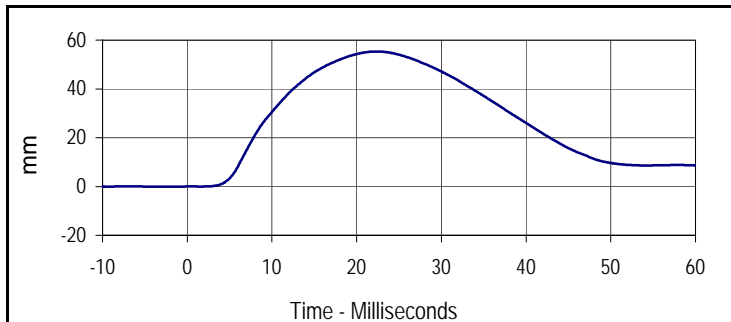

Curve Description			
Chest Deflection			
Plot No.	Type	SAE Class	Units
003	FIL	180	mm
Max	Time	Min	Time
55.3	22.4	0.0	-1.6

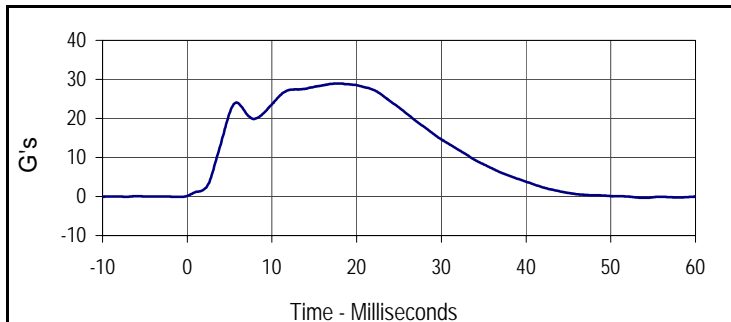

Curve Description			
Impactor Acceleration			
Plot No.	Type	SAE Class	Units
004	FIL	180	G's
Max	Time	Min	Time
29.0	17.6	-0.4	54.0

Test Program: Hybrid III 5th Percentile Female Knee Impact Test

Test Date: 2/25/13



ATD Serial No.: 141

Test I.D.: F141LK054, F141RK054

Left Knee


Tested Parameter	Units	Specification	Result	Pass/Fail
Knee Assembly Soak Time	Minutes	≥240	490	Pass
Temperature During Soak	Max	18.9 to 25.6	21.8	Pass
	Min		20.8	Pass
Humidity During Soak	Max	10.0 to 70.0	30.3	Pass
	Min		28.5	Pass
Laboratory Temperature During Test	°C	18.9 to 25.6	21.2	Pass
Laboratory Humidity During Test	%	10.0 to 70.0	29.7	Pass
Pendulum Velocity at T=0	m/sec	2.07 to 2.13	2.11	Pass
Peak Probe Force	Newtons	3450 to 4060	3930	Pass
Overall Test Results				Pass

Right Knee


Pendulum Velocity at T=0	m/sec	2.07 to 2.13	2.10	Pass
Peak Probe Force	Newtons	3450 to 4060	3741	Pass
Overall Test Results				Pass




Curve Description			
Left Knee Probe Force			
Plot No.	Type	SAE Class	Units
001	FIL	600	Newtons
Max	Time	Min	Time
3929.9	4.3	-26.4	9.9

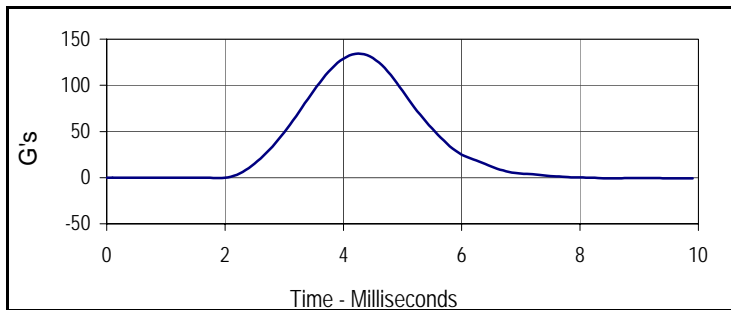

Curve Description			
Left Knee Acceleration			
Plot No.	Type	SAE Class	Units
002	FIL	600	G's
Max	Time	Min	Time
134.1	4.3	-1.4	0.0

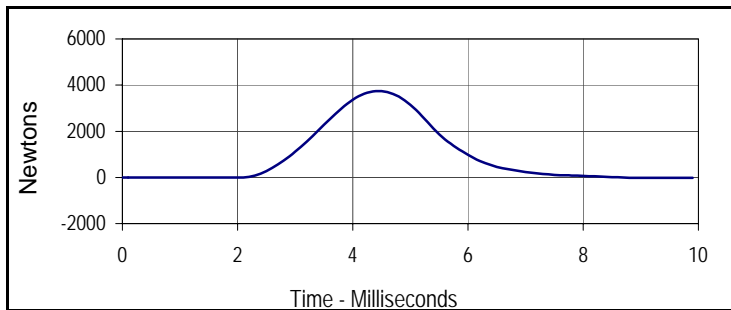

Curve Description			
Right Knee Probe Force			
Plot No.	Type	SAE Class	Units
003	FIL	600	Newtons
Max	Time	Min	Time
3740.7	4.4	-19.2	9.9

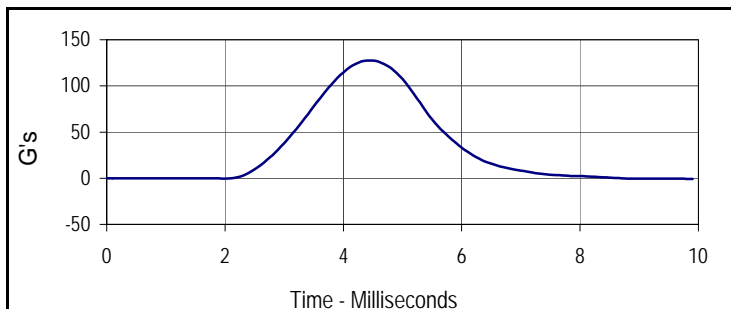

Curve Description			
Right Knee Acceleration			
Plot No.	Type	SAE Class	Units
004	FIL	600	G's
Max	Time	Min	Time
127.6	4.4	-1.3	0.0

Test Program: Hybrid III 5th Percentile Female Torso Flexion Test

Test Date: 2/25/13

ATD Serial No.: 141

Test I.D.: F141TF054



Left Hip Joint-Femur Results

Tested Parameter		Units	Specification	Result	Pass/Fail
Dummy Soak Time		Minutes	≥240	515	Pass
Temperature During Soak	Max	°C	18.9 to 25.6	21.8	Pass
	Min	°C		20.8	Pass
Humidity During Soak	Max	%	10.0 to 70.0	30.3	Pass
	Min	%		28.5	Pass
Laboratory Temperature During Test		°C	18.9 to 25.6	21.2	Pass
Laboratory Humidity During Test		%	10.0 to 70.0	29.7	Pass
Initial Reference Plane Angle		Degrees	≤ 20	3.8	Pass
Peak Force at 45° +/-0.5°		Newtons	320.0 to 390.0	352.1	Pass
Torso Rotation Rate		deg/sec	0.5 to 1.5	1.1	Pass
Final Reference Plane Angle		Degrees	+/-8	3.7	Pass
Overall Test Results					Pass