


**REPORT NUMBER: NCAP305I-MGA-2013-014**

**NEW CAR ASSESSMENT PROGRAM (NCAP)  
FMVSS No. 305 Indicant Test**

**FORD MOTOR COMPANY  
2013 Ford Fusion SE Energi 4-Dr Sedan  
NHTSA NUMBER: MD0221**

**MGA RESEARCH CORPORATION  
5000 Warren Road  
Burlington, WI 53105**

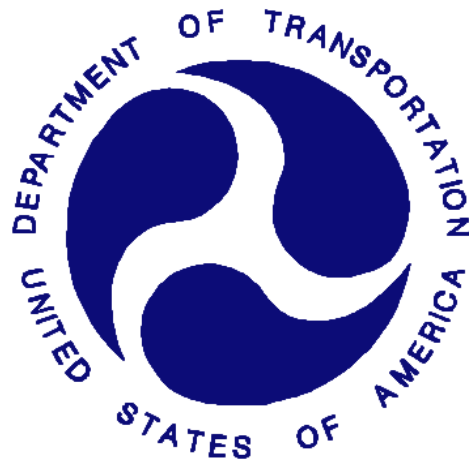

**Test Date: April 16, 2013**


**Report Date: May 9, 2013**

**FINAL REPORT**

**U.S. DEPARTMENT OF TRANSPORTATION  
National Highway Traffic Safety Administration  
Office of Crashworthiness Standards  
Mail Code: NVS-111  
1200 New Jersey Ave, SE  
Room W43-410  
Washington, DC 20590**

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof.

If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement.

Prepared by:   
Donna Janovicz, Project Manager

Approved by:   
Joe Fleck, Project Engineer

Approval Date: May 9, 2013

FINAL REPORT ACCEPTANCE BY OVSC:

\_\_\_\_\_  
Division Chief, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date: \_\_\_\_\_

\_\_\_\_\_  
COTR, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date: \_\_\_\_\_

### Technical Report Documentation Page

<p>1. <i>Report No.</i> NCAP305I-MGA-2013-014</p>	<p>2. <i>Government Accession No.</i></p>	<p>3. <i>Recipient's Catalog No.</i></p>	
<p>4. <i>Title and Subtitle</i> Final Report of FMVSS 305 Compliance Testing of 2013 Ford Fusion SE Energi 4-Dr Sedan, NHTSA No.: MD0221</p>		<p>5. <i>Report Date</i> May 9, 2013</p>	
		<p>6. <i>Performing Organization Code</i> MGA</p>	
<p>7. <i>Author(s)</i> Donna Janovicz, Project Manager Joe Fleck, Project Engineer</p>		<p>8. <i>Performing Organization Report No.</i> NCAP305I-MGA-2013-014</p>	
		<p>10. <i>Work Unit No.</i></p>	
<p>9. <i>Performing Organization Name and Address</i> MGA Research Corporation 5000 Warren Road Burlington, WI 53105</p>		<p>11. <i>Contract or Grant No.</i> DTNH22-09-D-00124</p>	
		<p>13. <i>Type of Report and Period Covered</i> Final Test Report April 16, 2013 to May 9, 2013</p>	
<p>12. <i>Sponsoring Agency Name and Address</i> U.S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards (NVS-111) 1200 New Jersey Ave, SE, Room W43-410 Washington, D.C. 20590</p>		<p>14. <i>Sponsoring Agency Code</i> NVS-111</p>	
		<p>15. <i>Supplementary Notes</i></p>	
<p>16. <i>Abstract</i></p> <p>An FMVSS No. 305 Indicant test, in conjunction with an NCAP side pole barrier impact test was conducted on the subject 2013 Ford Fusion SE Energi 4-Dr Sedan in accordance with the specifications of the applicable Office of Crashworthiness Standards Test Procedures for the generation of consumer information for the New Car Assessment Program (NCAP). No test failures were reported.</p>			
<p>17. <i>Key Words</i> New Car Assessment Program (NCAP) FMVSS 305 Indicant</p>		<p>18. <i>Distribution Statement</i> Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division, NPO-411 1200 New Jersey Ave, SE, Room E12-100 Washington, DC 20590 Email: <a href="mailto:tis@nhtsa.dot.gov">tis@nhtsa.dot.gov</a> FAX: 202-493-2833</p>	
<p>19. <i>Security Classification of Report</i> Unclassified</p>	<p>20. <i>Security Classification of Page</i> Unclassified</p>	<p>21. <i>No. of Pages</i> 42</p>	<p>22. <i>Price</i></p>

## TABLE OF CONTENTS

<u>Section</u>		<u>Page No.</u>
1	Purpose of Test	1
2	Summary of Test Results	2
3	Data Sheets	3
 <u>Data Sheet</u>		 <u>Page No.</u>
1	Test Vehicle Specifications	4
2	Pre-Impact Data	6
3	Pre-Impact Electric Isolation Measurements and Calculations	7
4	Post-Impact Data	9
5	Static Rollover Test Data	11
 <u>Appendix</u>		
A	Photographs	A-1

**SECTION 1**  
**PURPOSE OF TEST**

An FMVSS No. 305 Indicant test, in conjunction with an NCAP side pole barrier impact test was conducted on the subject 2013 Ford Fusion SE Energi 4-Dr Sedan.

The Indicant test was conducted in accordance with the Office of Crashworthiness Standards Laboratory Test Procedure, dated January 31, 2012 to determine compliance to the requirements of Federal Motor Vehicle Safety Standard (FMVSS) No. 305, "Electric-Powered Vehicles: Electrolyte Spillage and Electrical Shock Protection" for the purpose of providing consumer information.

This FMVSS No. 305 Indicant test is part of the FY13 New Car Assessment Program Test Program, sponsored by the National Highway Traffic Safety Administration (NHTSA), under contract DTNH22-09-D-00124.

## **SECTION 2 SUMMARY OF TEST RESULTS**

A NCAP side pole barrier impact test was performed by MGA Research Corporation on a 2013 Ford Fusion SE Energi 4-Dr Sedan on April 16, 2013. Electrical isolation measurements were taken immediately post-impact and observations were made related to electrolyte spillage and battery retention. A static rollover was subsequently performed on the subject vehicle and electrical isolation measurements were taken at each stage of the rollover.

Based on the test results, the 2013 Ford Fusion SE Energi 4-Dr Sedan appears to meet the requirements for electrolyte spillage, electrical isolation, and battery retention during FMVSS No. 305 Indicant testing.

Data sheets, along with pre-test and post-test photographs of the test vehicle, are included in this report to document the test.

### **TEST NOTES**

None

MGA does not endorse or certify products. The manufacturer's name appears solely for identification purposes.

**SECTION 3  
DATA SHEETS**

**DATA SHEET 1  
TEST VEHICLE SPECIFICATIONS**

Test Vehicle: 2013 Ford Fusion SE Energi 4-Dr Sedan

NHTSA No. MD0221

**TEST VEHICLE INFORMATION**

Year/Make/Model/Body Style	2013 Ford Fusion SE Energi 4-Dr Sedan
NHTSA No.	MD0221
Color	Deep Impact Blue
Odometer Reading	16 miles

**DATA FROM CERTIFICATION LABEL**

Manufactured By	FORD MOTOR COMPANY	GVWR (kg)	2227
Date of Manufacture	02/13	GAWR Front (kg)	1105
VIN:	3FA6P0PU2DR252083	GAWR Rear (kg)	1127

**ELECTRIC VEHICLE PROPULSION SYSTEM**

Type of Electric Vehicle (Electric/Hybrid):	Gas-Plug-In Electric Hybrid
Electric Energy Storage/Device:	Lithium-Ion
Nominal Voltage (V):	300 V
Is this vehicle equipped with an Automatic Propulsion Battery Disconnect?	Yes
Physical Location of the Automatic Propulsion Battery Disconnect:	The two contactors are located inside the battery pack in the electronics side (passenger side).
Auxiliary Battery Type:	12 V Lead Acid Battery

**DATA SHEET 1 (CONTINUED)  
TEST VEHICLE SPECIFICATIONS**

Test Vehicle: 2013 Ford Fusion SE Energi 4-Dr Sedan

NHTSA No. MD0221

**ELECTRIC ENERGY STORAGE CONVERSION/DEVICE SYSTEM DATA (COTR SUPPLIED)**

Electrolyte Fluid Type:	Non-Aqueous Electrolyte	
Electrolyte Fluid Specific Gravity:	1.23 (g/cc)	
Electrolyte Kinematic Viscosity (centistokes):	3.4 (mPa·s) 25° C	
Electrolyte Fluid Color:	Clear Liquid (APHA ≤ 80)	
Electric Energy Storage/Conversion System Coolant Type, Color, Specific Gravity (if applicable):	Air Cooled System	
Location of Battery Modules:	<input type="checkbox"/>	Inside Passenger Compartment
	<input checked="" type="checkbox"/>	Outside Passenger Compartment
	The high voltage battery is mounted behind the rear seat.	

**ELECTRIC ENERGY STORAGE CONVERSION/DEVICE STATE OF CHARGE**

<i>For all battery types:</i>	
Voltage range corresponding to <b>useable energy</b> of the battery:	
Minimum State of Charge:	
Maximum State of Charge:	345.0 V
95% of Maximum State of Charge:	327.8 V
Test Voltage - No less than 95% of maximum State of Charge:	338.5 V
<i>For batteries that are rechargeable ONLY by an energy source on the vehicle:</i>	
Voltage range corresponding to <b>useable energy</b> of the battery:	
Minimum State of Charge:	
Maximum State of Charge:	
Test Voltage – Maximum practicable State of Charge within Normal Operating Range:	

**DATA SHEET 2  
PRE-IMPACT DATA**

Test Vehicle: 2013 Ford Fusion SE Energi 4-Dr Sedan

NHTSA No. MD0221

**VEHICLE CHASSIS GROUND POINT(S) LOCATION(S)**

Details of Vehicle Chassis Ground Point(s) & Location(s)	Right Rear Side of Vehicle Body  Paint was removed before ground was attached.
--	--

**ELECTRIC ENERGY STORAGE/CONVERSION TEST POINTS**

Details of Electric Energy Storage/Conversion System Test Points:	+ and – Terminal Used at Terminal Ends of DCDC Converter
---	--

**DATA SHEET 3**  
**PRE-IMPACT ELECTRIC ISOLATION MEASUREMENTS & CALCULATIONS**

Test Vehicle: 2013 Ford Fusion SE Energi 4-Dr Sedan

NHTSA No. MD0221

**VOLTMETER INFORMATION**

Make:	Fluke
Model:	177
Serial Number:	17210161
Internal Impedance Value (MΩ):	> 10 MΩ < 100 pF
Resolution (V):	.001 Volts
Last Calibration Date:	04/12/2013

**ELECTRIC ENERGY STORAGE/CONVERSION SYSTEM VOLTAGE**

Measurement shall be made with Energy Storage/Conversion System connected to the vehicle propulsion system, and the vehicle in the “ready-to-drive” (propulsion system energized) position.

If voltage measurement is not at the voltage or within the normal operating voltage range specified by the manufacturer, the battery must be charged.

Vb (V):	338.5
---------	-------

**ELECTRIC ENERGY STORAGE/CONVERSION SYSTEM TO VEHICLE CHASSIS**

Vehicle chassis point(s) determined and supplied to contractor by COTR.

V1 (V):	282.3
V2 (V):	277.0

**ELECTRIC ENERGY STORAGE/CONVERSION SYSTEM TO VEHICLE CHASSIS ACROSS RESISTOR**

The known resistance Ro (in ohms) should be approximately 500 times the normal operating voltage of the vehicle (in volts) per SAE J1766.

Ro (Ω):	173300
---------	--------

V1' (V) Pre-Impact:	83.6
V2' (V) Pre-Impact:	83.7

**DATA SHEET 3 (CONTINUED)**  
**PRE-IMPACT ELECTRICAL ISOLATION MEASUREMENTS & CALCULATIONS**

Test Vehicle: 2013 Ford Fusion SE Energi 4-Dr Sedan

NHTSA No. MD0221

**ELECTRICAL ISOLATION MEASUREMENT**

Note: If measured voltage is zero and results in a division by zero, record "Zero Volts". This "zero voltage" condition is considered as being compliant.

V1' (V):	83.6
$R_{i1} = R_o (1 + V_2/V_1) [(V_1 - V_1')/V_1']$	
Ri1 (Ω):	816064
V2' (V):	83.7
$R_{i2} = R_o (1 + V_1/V_2) [(V_2 - V_2')/V_2']$	
Ri2 (Ω):	808109
Ri = The lesser of Ri1 and Ri2	
Ri Pre-Test (Ω):	808109
Ri/Vb (Ω/V):	2387
Minimum Electrical Isolation Value is 500 Ω/V	

Is the measured Electrical Isolation Value:	Yes, Pass	No, Fail
≥500 Ω/V without electrical isolation monitoring	X	
≥100 Ω/V with electrical isolation monitoring		

**DATA SHEET 4  
POST-IMPACT DATA**

Test Vehicle: 2013 Ford Fusion SE Energi 4-Dr Sedan

NHTSA No. MD0221

**VOLTMETER INFORMATION**

Make:	Fluke
Model:	177
Serial Number:	17210161
Internal Impedance Value (MΩ):	> 10 MΩ < 100 pF
Nominal Propulsion Battery Voltage (Vb) (V):	338.5

**ELECTRIC ENERGY STORAGE/CONVERSION SYSTEM  
VOLTAGE LOCATION OF MEASUREMENT**

Measurement is made from the side of the automatic disconnect connected to the electric powertrain.

Vb (V):	2.3
---------	-----

**ELECTRIC ENERGY STORAGE/CONVERSION SYSTEM VOLTAGE**

V1 =	2.1	V	Impact Time:	1	Minutes	6	s
V2 =	0.1	V	Impact Time:	1	Minutes	13	s
V1' =	0.0	V	Impact Time:	1	Minutes	23	s
V2' =	0.0	V	Impact Time:	1	Minutes	28	s

**ELECTRICAL ISOLATION MEASUREMENT**

Note: If measured voltage is zero and results in a division by zero, record "Zero Volts". This "zero voltage" condition is considered as being compliant.

$Ri1 = Ro (1 + V2/V1) [(V1-V1')/V1']$							
Ri1 =	Zero Voltage	Ω	Impact Time:	1	Minutes	6	s
$Ri2 = Ro (1 + V1/V2) [(V2-V2')/V2']$							
Ri2 =	Zero Voltage	Ω	Impact Time:	1	Minutes	13	s
Ri = The lesser of Ri1 and Ri2							
Ri =	Zero Voltage	Ω	Impact Time:	1	Minutes	6	s
Ri/Vb = electrical Isolation Value/Nominal Battery Voltage							
Minimum Electrical Value is 500 Ω/V							
Ri/Vb =	Zero Voltage	Ω/V	Impact Time:	1	Minutes	6	s

Is the measured Electrical Isolation Value:	Yes, Pass	No, Fail
≥500 Ω/V without electrical isolation monitoring	X	
≥100 Ω/V with electrical isolation monitoring		

**DATA SHEET 4 (CONTINUED)  
POST-IMPACT DATA**

Test Vehicle: 2013 Ford Fusion SE Energi 4-Dr Sedan

NHTSA No. MD0221

**ELECTRIC ENERGY STORAGE/CONVERSION DEVICE**

	Inside Passenger Compartment	Outside Passenger Compartment
Location of Electric Energy Storage/Conversion Device:		X

	Yes, Pass	No, Fail
All Components of Electrical Energy Storage/Conversion Device remained attached to the vehicle with at least one mounting location.	X	

Describe Electric Energy Storage/Conversion Device movement within the passenger compartment [Supply photographs as appropriate]:
Not Applicable

	Yes, Fail	No, Pass
Has the Electric Energy Storage/Conversion Device moved within the passenger compartment?		X

Describe intrusion of an outside Electric Energy Storage/Conversion Device into the passenger compartment [Supply photographs as appropriate]:
No Intrusion


	Yes, Fail	No, Pass
Has an outside Electric Energy Storage/Conversion Device intruded into the passenger compartment?		X

	Yes, Fail	No, Pass
Is Electric Energy Storage/Conversion Device electrolyte spillage visible in the passenger compartment?		X

**DATA SHEET 5  
STATIC ROLLOVER TEST DATA**

Test Vehicle: 2013 Ford Fusion SE Energi 4-Dr Sedan

NHTSA No. MD0221

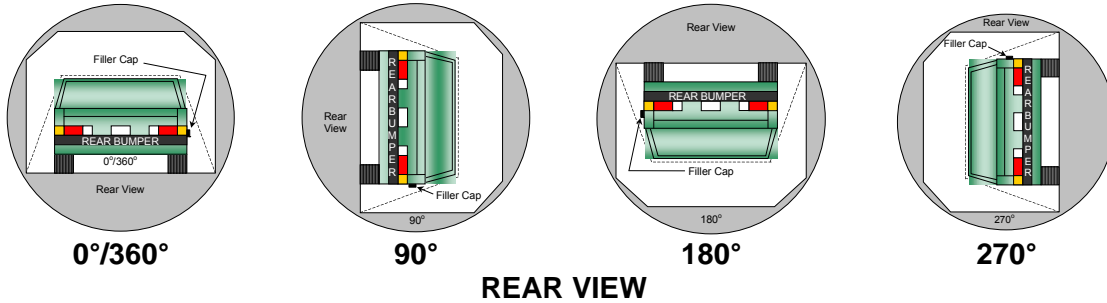

**DETERMINATION OF ELECTRIC ENERGY STORAGE/CONVERSION DEVICE  
ELECTROLYTE COLLECTION TIME PERIOD**

Rollover Stage	Rotation Time (spec. 1-3 min)				FMVSS 301 Hold Time		Total Time				Next Whole Minute Interval	
0° - 90°	1	minutes	52	seconds	5	minutes	6	Minutes	52	seconds	7	minutes
90° - 180°	1	minutes	52	seconds	5	minutes	6	minutes	52	seconds	7	minutes
180° - 270°	1	Minutes	47	seconds	5	minutes	6	minutes	47	seconds	7	minutes
270° - 360°	1	minutes	54	seconds	5	minutes	6	minutes	54	seconds	7	minutes

**ACTUAL TEST VEHICLE ELECTRIC ENERGY STORAGE/CONVERSION DEVICE  
ELECTROLYTE SPILLAGE**

Rollover Stage	Electric Energy Storage/Conversion Device Electrolyte Spillage (L)	Spillage Location
0° to 90°	0	Not Applicable
90° to 180°	0	Not Applicable
180° to 270°	0	Not Applicable
270° to 360°	0	Not Applicable

Total Spillage:  0  L

	Yes, Fail	No, Pass
Is the total spillage of Electric Energy Storage/Conversion Device electrolyte greater than 5.0 Liters?		X
Is Electric Energy Storage/Conversion Device electrolyte spillage visible in the passenger compartment?		X

**DATA SHEET 5 (CONTINUED)  
STATIC ROLLOVER TEST DATA**

Test Vehicle: 2013 Ford Fusion SE Energi 4-Dr Sedan

NHTSA No. MD0221

**VOLTMETER INFORMATION**

Make:	Fluke
Model:	177
Serial Number:	17210161
Internal Impedance Value (MΩ):	> 10 MΩ < 100 pF
Nominal Electric Energy Storage/Conversion Device Voltage (Vb) (V):	338.5
Record V1, V2, V1', V2' voltage measurements at the start of each successive increment of 90°, 180°, 270°, and 360° of the static rollover test.	

**ELECTRICAL ISOLATION MEASUREMENT**

V1 =	0.0	V	0°	Time:		Minutes		s
V1 =	0.0	V	90°	Time:	3	Minutes	12	s
V1 =	0.0	V	180°	Time:	2	Minutes	39	s
V1 =	0.0	V	270°	Time:	4	Minutes	42	s
V1 =	0.0	V	360°	Time:	2	Minutes	48	s
V2 =	0.0	V	0°	Time:		Minutes		s
V2 =	0.0	V	90°	Time:	3	Minutes	16	s
V2 =	0.0	V	180°	Time:	2	Minutes	43	s
V2 =	0.0	V	270°	Time:	4	Minutes	46	s
V2 =	0.0	V	360°	Time:	2	Minutes	52	s
V1' =	0.0	V	0°	Time:		Minutes		s
V1' =	0.0	V	90°	Time:	3	Minutes	21	s
V1' =	0.0	V	180°	Time:	2	Minutes	51	s
V1' =	0.0	V	270°	Time:	4	Minutes	53	s
V1' =	0.0	V	360°	Time:	2	Minutes	57	s
V2' =	0.0	V	0°	Time:		Minutes		s
V2' =	0.0	V	90°	Time:	3	Minutes	26	s
V2' =	0.0	V	180°	Time:	2	Minutes	57	s
V2' =	0.0	V	270°	Time:	4	Minutes	59	s
V2' =	0.0	V	360°	Time:	3	Minutes	2	s
Vb =	0.0	V	0°	Time:		Minutes		s
Vb =	0.0	V	90°	Time:	3	Minutes	8	s
Vb =	0.0	V	180°	Time:	2	Minutes	35	s
Vb =	0.0	V	270°	Time:	4	Minutes	38	s
Vb =	0.0	V	360°	Time:	2	Minutes	45	s

**DATA SHEET 5 (CONTINUED)  
STATIC ROLLOVER TEST DATA**

Test Vehicle: 2013 Ford Fusion SE Energi 4-Dr Sedan

NHTSA No. MD0221

**ELECTRICAL ISOLATION CALCULATION**

Note: If measured voltage is zero and results in a division by zero, record "Zero Volts". This "zero voltage" condition is considered as being compliant.

$R_{i1} = R_o (1 + V_2/V_1) [(V_1 - V_1')/V_1']$								
R <sub>i1</sub> =	Zero Voltage	Ω	0°	Time:		Minutes		s
R <sub>i1</sub> =	Zero Voltage	Ω	90°	Time:	3	Minutes	12	s
R <sub>i1</sub> =	Zero Voltage	Ω	180°	Time:	2	Minutes	39	s
R <sub>i1</sub> =	Zero Voltage	Ω	270°	Time:	4	Minutes	42	s
R <sub>i1</sub> =	Zero Voltage	Ω	360°	Time:	2	Minutes	48	s
$R_{i2} = R_o (1 + V_1/V_2) [(V_2 - V_2')/V_2']$								
R <sub>i2</sub> =	Zero Voltage	Ω	0°	Time:		Minutes		s
R <sub>i2</sub> =	Zero Voltage	Ω	90°	Time:	3	Minutes	16	s
R <sub>i2</sub> =	Zero Voltage	Ω	180°	Time:	2	Minutes	43	s
R <sub>i2</sub> =	Zero Voltage	Ω	270°	Time:	4	Minutes	46	s
R <sub>i2</sub> =	Zero Voltage	Ω	360°	Time:	2	Minutes	52	s
R <sub>i</sub> = The lesser of R <sub>i1</sub> and R <sub>i2</sub>								
R <sub>i</sub> =	Zero Voltage	Ω	0°	Time:		Minutes		s
R <sub>i</sub> =	Zero Voltage	Ω	90°	Time:	3	Minutes	12	s
R <sub>i</sub> =	Zero Voltage	Ω	180°	Time:	2	Minutes	39	s
R <sub>i</sub> =	Zero Voltage	Ω	270°	Time:	4	Minutes	42	s
R <sub>i</sub> =	Zero Voltage	Ω	360°	Time:	2	Minutes	48	s
R <sub>i</sub> /V <sub>b</sub> = Electrical Isolation Value/Nominal Battery Voltage Minimum Electrical Isolation Value is 500 Ω /V								
R <sub>i</sub> /V <sub>b</sub> =	Zero Voltage	Ω/V	0°	Time:		Minutes		s
R <sub>i</sub> /V <sub>b</sub> =	Zero Voltage	Ω/V	90°	Time:	3	Minutes	12	s
R <sub>i</sub> /V <sub>b</sub> =	Zero Voltage	Ω/V	180°	Time:	2	Minutes	39	s
R <sub>i</sub> /V <sub>b</sub> =	Zero Voltage	Ω/V	270°	Time:	4	Minutes	42	s
R <sub>i</sub> /V <sub>b</sub> =	Zero Voltage	Ω/V	360°	Time:	2	Minutes	48	s

Is the measured Electrical Isolation Value:	Yes, Pass	No, Fail
≥500 Ω/V without electrical isolation monitoring	X	
≥100 Ω/V with electrical isolation monitoring		

**APPENDIX A  
PHOTOGRAPHS**

## TABLE OF PHOTOGRAPHS

	<u>Page No.</u>
Auxiliary Power Module Warning Label	A-1
Power Inverter Warning Label	A-1
First Responder Warning Label	A-2
First Responder Warning Location	A-2
Other Vehicle Label(s) Related to Electrical Propulsion System	A-3
Manual High Voltage Service Disconnect in Place	A-3
Manual High Voltage Service Disconnect Removed	A-4
Manual High Voltage Service Disconnect Removed	A-4
Pre-Impact View of Propulsion Battery	A-5
Post-Impact Front View of Propulsion Battery	A-5
Post-Impact Rear View of Propulsion Battery	A-6
Pre-Impact View of Battery Box(s) or Container(s) Which Holds Individual Battery Modules	A-6
Post-Impact View of Battery Box(s) or Container(s) Which Holds Individual Battery Modules	A-7
Pre-Impact View of Propulsion Battery Module(s)	A-7
Post-Impact View of Propulsion Battery Module(s)	A-8
Pre-Impact View of Electric Propulsion Drive	A-8
Pre-Impact View of Electric Propulsion Drive	A-9
Post-Impact View of Electric Propulsion Drive	A-9
Post-Impact View of Electric Propulsion Drive	A-10
Pre-Impact View of High Voltage Interconnect(s)	A-10
Pre-Impact View Propulsion Battery Venting System(s)	A-11
Pre-Impact View of Other Visible Electric Propulsion Components	A-11
Pre-Impact View of Ground Lead Attached	A-12
Pre-Impact View of High Voltage Leads Attached	A-12
Pre-Impact Close-Up View of High Voltage Leads Attached	A-13
Pre-Impact View of Installed Impact Interface Port	A-13
Post-Impact View of Installed Impact Interface Port	A-14
Pre-Impact View of Other Test Devices	A-14
Post-Impact View of Other Test Devices	A-15
FMVSS No. 305 Static Rollover at 90°	A-15
FMVSS No. 305 Static Rollover at 180°	A-16
FMVSS No. 305 Static Rollover at 270°	A-16
FMVSS No. 305 Static Rollover at 360°	A-17

	<u>Page No.</u>
Pre-Impact View of the Vehicle Passenger Compartment Adjacent to Propulsion Battery	A-17
Post-Impact View of the Vehicle Passenger Compartment Adjacent to Propulsion Battery	A-18
Post-Impact Propulsion Battery System Mounting and/or Intrusion Failure(s)	A-18
Post-Impact View of Battery Component Intrusion	A-19
Post-Impact View of Battery Module Movement or Retention Loss	A-19
Post-Impact View of Propulsion Battery Electrolyte Spillage Location	A-20
Post-Test View of Propulsion Battery Electrolyte Spillage Location	A-20
As Delivered Right Front $\frac{3}{4}$ View of Impact Vehicle	A-21
As Delivered Left Rear $\frac{3}{4}$ View of Impact Vehicle	A-21
Vehicle's Certification Label	A-22
Vehicle's Tire Information Placard or Label	A-22

**PHOTOGRAPH NOT APPLICABLE**

No. 001 Auxiliary Power Module Warning Label



No. 002 Power Inverter Warning Label

**PHOTOGRAPH NOT APPLICABLE**

No. 003 First Responder Warning Label

**PHOTOGRAPH NOT APPLICABLE**

No. 004 First Responder Warning Location



No. 005 Other Vehicle Label(s) Related to Electrical Propulsion System



No. 006 Manual High Voltage Service Disconnect in Place



No. 007 Manual High Voltage Service Disconnect Removed



No. 008 Manual High Voltage Service Disconnect Removed



No. 009 Pre-Impact View of Propulsion Battery



No. 010 Post-Impact Front View of Propulsion Battery



No. 011 Post-Impact Rear View of Propulsion Battery



No. 012 Pre-Impact View of Battery Box(s) or Container(s) Which Holds Individual Battery Modules



No. 013 Post-Impact View of Battery Box(s) or Container(s) Which Holds Individual Battery Modules

**PHOTOGRAPH NOT APPLICABLE**

No. 014 Pre-Impact View of Propulsion Battery Module(s)

**PHOTOGRAPH NOT APPLICABLE**

No. 015 Post-Impact View of Propulsion Battery Module(s)



No. 016 Pre-Impact View of Electric Propulsion Drive




No. 016a Pre-Impact View of Electric Propulsion Drive



No. 017 Post-Impact View of Electric Propulsion Drive



No. 017a Post-Impact View of Electric Propulsion Drive

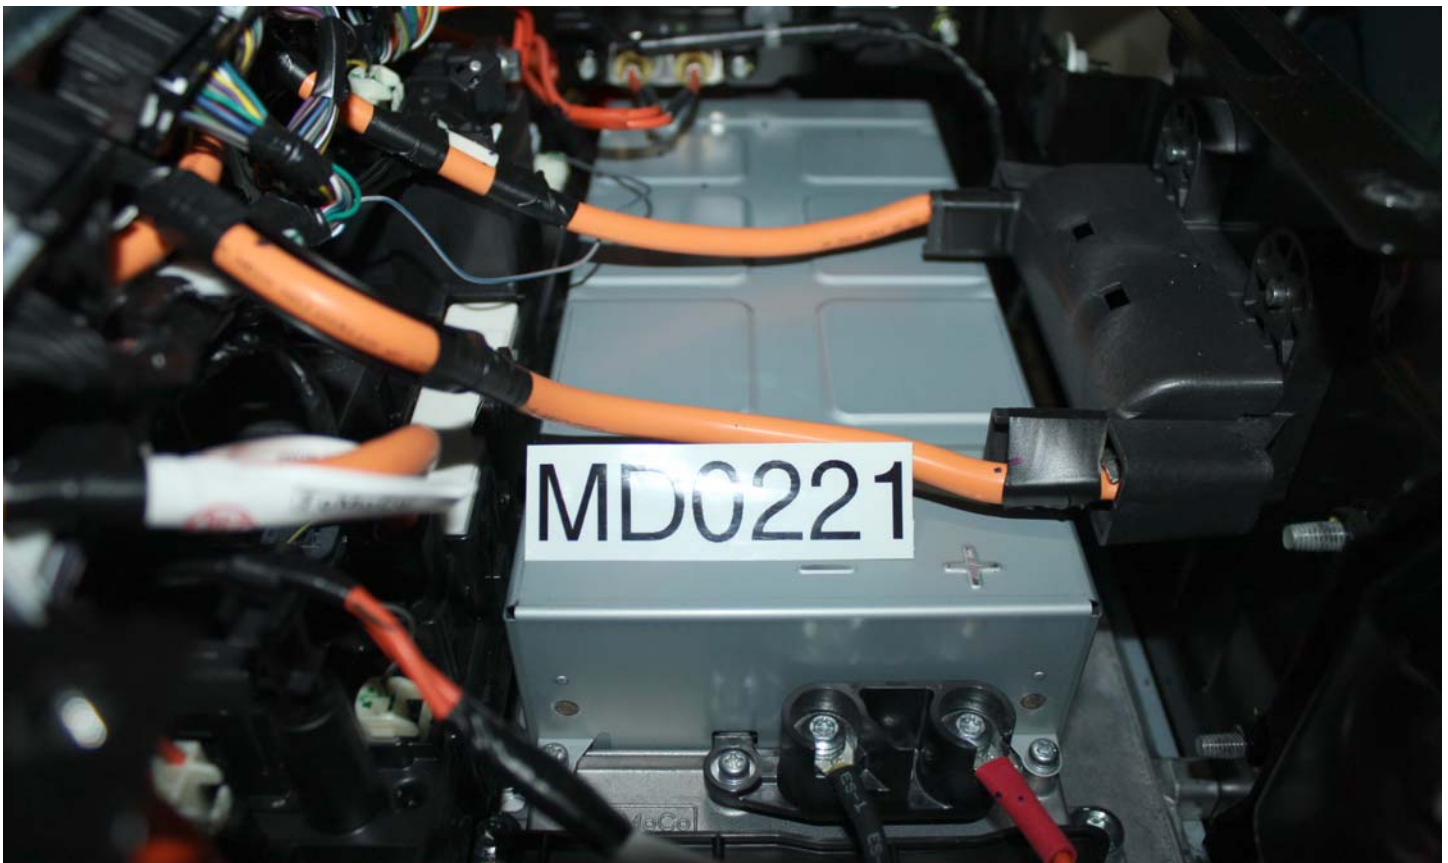

No. 018 Pre-Impact View of High Voltage Interconnect(s)

**PHOTOGRAPH NOT APPLICABLE**


No. 019 Pre-Impact View Propulsion Battery Venting System(s)

**PHOTOGRAPH NOT APPLICABLE**


No. 020 Pre-Impact View of Other Visible Electric Propulsion Components



No. 021 Pre-Impact View of Ground Lead Attached

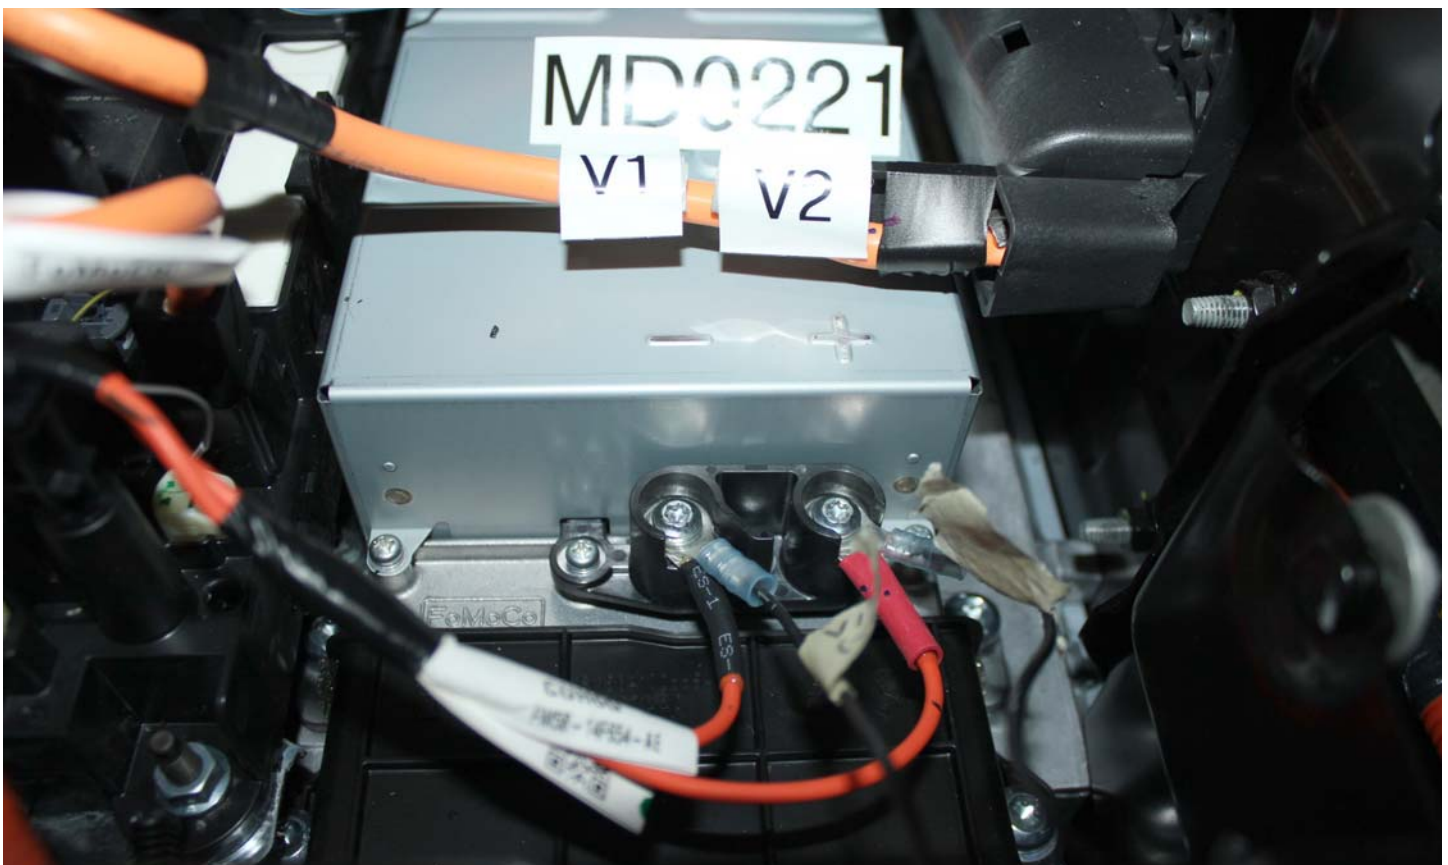


No. 022 Pre-Impact View of High Voltage Leads Attached

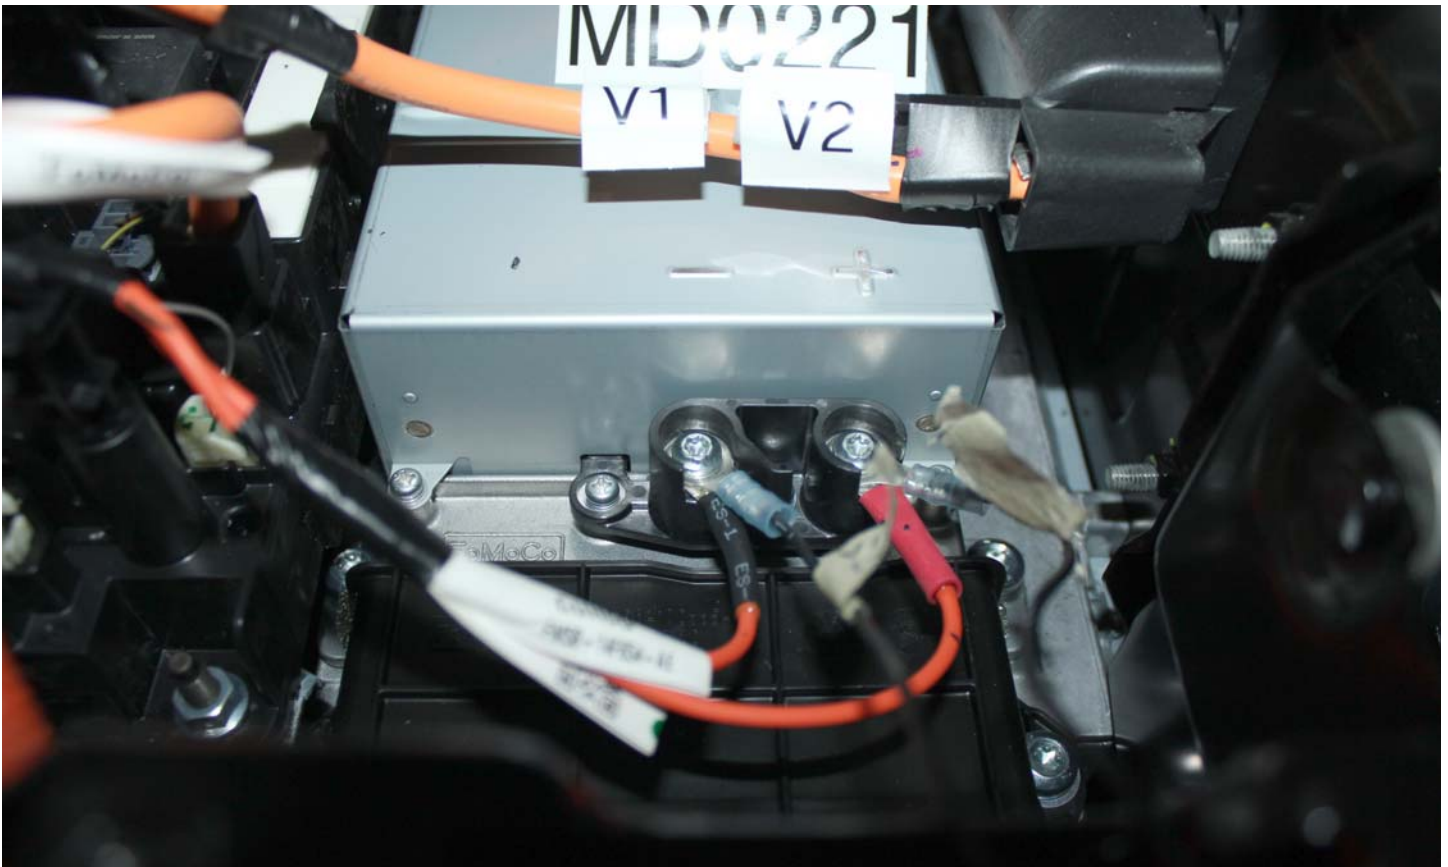

No. 023 Pre-Impact Close-Up View of High Voltage Leads Attached



No. 024 Pre-Impact View of Installed Impact Interface Port

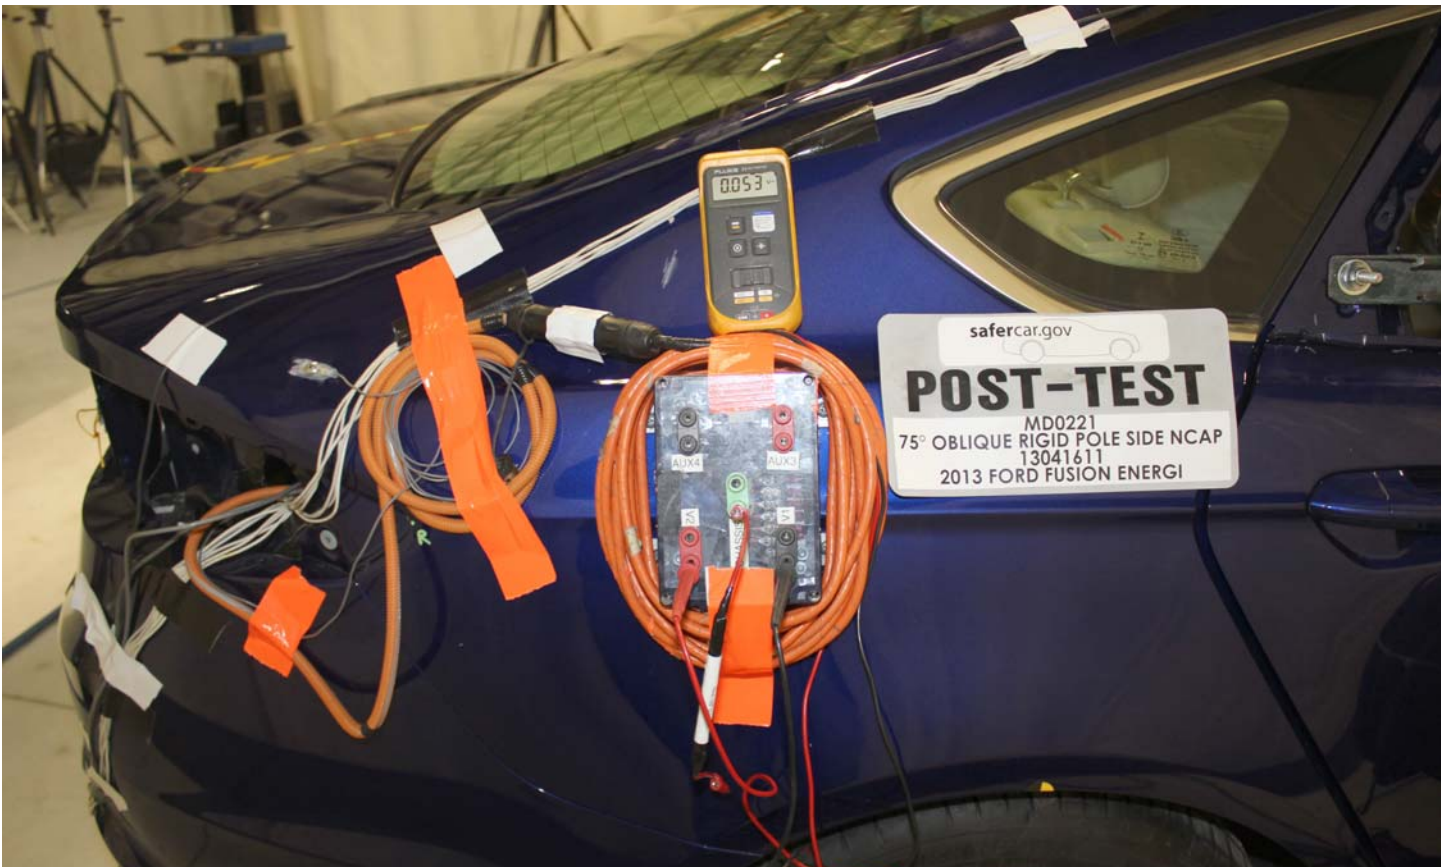

No. 025 Post-Impact View of Installed Impact Interface Port

**PHOTOGRAPH NOT APPLICABLE**

No. 026 Pre-Impact View of Other Test Devices

**PHOTOGRAPH NOT APPLICABLE**

No. 027 Post-Impact View of Other Test Devices



No. 028 FMVSS No. 305 Static Rollover at 90°



No. 029 FMVSS No. 305 Static Rollover at 180°



No. 030 FMVSS No. 305 Static Rollover at 270°



No. 031 FMVSS No. 305 Static Rollover at 360°



No. 032 Pre-Impact View of the Vehicle Passenger Compartment Adjacent to Propulsion Battery



No. 033 Post-Impact View of the Vehicle Passenger Compartment Adjacent to Propulsion Battery

**PHOTOGRAPH NOT APPLICABLE**

No. 034 Post-Impact Propulsion Battery System Mounting and-or Intrusion Failure(s)

**PHOTOGRAPH NOT APPLICABLE**

No. 035 Post-Impact View of Battery Component Intrusion

**PHOTOGRAPH NOT APPLICABLE**

No. 036 Post-Impact View of Battery Module Movement or Retention Loss

**PHOTOGRAPH NOT APPLICABLE**

No. 037 Post-Impact View of Propulsion Battery Electrolyte Spillage Location

**PHOTOGRAPH NOT APPLICABLE**

No. 038 Post-Test View of Propulsion Battery Electrolyte Spillage Location



No. 039 As Delivered Right Front  $\frac{3}{4}$  View of Impact Vehicle



No. 040 As Delivered Left Rear  $\frac{3}{4}$  View of Impact Vehicle



No. 041 Vehicle's Certification Label



No. 042 Vehicle's Tire Information Placard