

REPORT NUMBER: SINCAP-MCW-14-001

**NEW CAR ASSESSMENT PROGRAM (NCAP)
MOVING DEFORMABLE BARRIER SIDE IMPACT TEST**

**CHRYSLER GROUP, LLC
2014 JEEP PATRIOT 5-DOOR SUV
NHTSA NUMBER: M20140308**

**PREPARED BY:
MEDICAL COLLEGE OF WISCONSIN
5000 WEST NATIONAL AVENUE
RESEARCH 151
MILWAUKEE, WISCONSIN 53295**



TEST DATE: 13 NOVEMBER 2013

REPORT DATE: 10 DECEMBER 2013

FINAL REPORT

**PREPARED FOR:
U.S. DEPARTMENT OF TRANSPORTATION
National Highway Traffic Safety Administration
Office of Crashworthiness Standards
Mail Code: NVS-111
1200 New Jersey Ave, SE, Room W43-410
Washington, DC 20590**

Test Vehicle: 2014 Jeep Patriot 5-Door SUV
Test Program: SINCAP

NHTSA Number: M20140308
Test Date: November 13, 2013

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement.

Prepared by: Mark Miller

Date: 3/19/14

Approved by: Brian D Stemper

Date: March 18, 2014

FINAL REPORT ACCEPTANCE BY OCWS:

Division Chief, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

COTR, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

Technical Report Documentation Page

1. Report No. SINCAP-MCW-14-001	2. Government Accession No.	3. Recipient's Catalog No.																																												
4. Title and Subtitle Final report of New Car Assessment Program Side Impact MDB Test of a 2014 Jeep Patriot 5-Door SUV NHTSA No. M20140308		5. Report Date December 10, 2013																																												
		6. Performing Organization Code MCW																																												
7. Author(s) Brian D. Stemper, Ph. D, Project Manager Mark Meyer, Project Engineer		8. Performing Organization Report No. MCW-DOT-2014-001																																												
9. Performing Organization Name and Address Medical College of Wisconsin 5000 W. National Ave. Research 151 Milwaukee, WI 53295		10. Work Unit No.																																												
		11. Contract or Grant No. DTNH22-09-D-00123																																												
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards (NVS-111) 1200 New Jersey Ave, SE, Room W43-410 Washington, D.C. 20590		13. Type of Report and Period Covered: Final Test Report November 13 to December 10, 2013																																												
		14. Sponsoring Agency Code NVS-111																																												
15. Supplementary Notes																																														
<p>16. Abstract</p> <p>A 55/28 km/h 90° Moving Deformable Barrier NCAP Side Impact Test was conducted on the subject 2014 Jeep Patriot 5-Door SUV in accordance with the specifications of the Office of Crashworthiness Standards Test Procedure for the generation of consumer information on vehicle side crash protection. The test was conducted at the Medical College of Wisconsin (MCW) facility in Milwaukee, Wisconsin on 13 November 2013.</p> <p>The impact velocity of the Moving Deformable Barrier (MDB) was 62.25 km/h, and the ambient temperature at the struck (driver's) side of the target vehicle at the time of impact was 21°C. The target vehicle's post test maximum static crush was 176 mm at level 3. The test vehicle's performance is as follows:</p> <table border="1" data-bbox="162 1197 1380 1386"> <thead> <tr> <th></th> <th><u>Units</u></th> <th><u>IARV</u></th> <th><u>DRIVER ATD (ES-2re)</u></th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC₃₆)</td> <td>N/a</td> <td>1000</td> <td>57</td> </tr> <tr> <td>Maximum Thoracic Rib Deflection</td> <td>mm</td> <td>44</td> <td>28</td> </tr> <tr> <td>Total Abdominal Force</td> <td>N</td> <td>2500</td> <td>383</td> </tr> <tr> <td>Pubic Symphysis Force</td> <td>N</td> <td>6000</td> <td>1894</td> </tr> </tbody> </table> <table border="1" data-bbox="162 1417 1380 1669"> <thead> <tr> <th></th> <th><u>Units</u></th> <th><u>IARV</u></th> <th><u>Pass. ATD (SID-IIIs)</u></th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC₃₆)</td> <td>N/a</td> <td>1000</td> <td>238</td> </tr> <tr> <td>Lower Spine Resultant Acceleration</td> <td>G</td> <td>82</td> <td>58</td> </tr> <tr> <td>Total Pelvic Force (sum of acetabular and iliac forces)</td> <td>N</td> <td>5525</td> <td>3357</td> </tr> <tr> <td>Maximum Thoracic Rib Deflection</td> <td>mm</td> <td>38*</td> <td>28</td> </tr> <tr> <td>Maximum Abdominal Rib Deflection</td> <td>mm</td> <td>45*</td> <td>23</td> </tr> </tbody> </table> <p>The two doors on the struck side of the vehicle did not separate from the body at the hinges or latches and the opposite doors did not open during the side impact event.</p>				<u>Units</u>	<u>IARV</u>	<u>DRIVER ATD (ES-2re)</u>	Head Injury Criteria (HIC ₃₆)	N/a	1000	57	Maximum Thoracic Rib Deflection	mm	44	28	Total Abdominal Force	N	2500	383	Pubic Symphysis Force	N	6000	1894		<u>Units</u>	<u>IARV</u>	<u>Pass. ATD (SID-IIIs)</u>	Head Injury Criteria (HIC ₃₆)	N/a	1000	238	Lower Spine Resultant Acceleration	G	82	58	Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	3357	Maximum Thoracic Rib Deflection	mm	38*	28	Maximum Abdominal Rib Deflection	mm	45*	23
	<u>Units</u>	<u>IARV</u>	<u>DRIVER ATD (ES-2re)</u>																																											
Head Injury Criteria (HIC ₃₆)	N/a	1000	57																																											
Maximum Thoracic Rib Deflection	mm	44	28																																											
Total Abdominal Force	N	2500	383																																											
Pubic Symphysis Force	N	6000	1894																																											
	<u>Units</u>	<u>IARV</u>	<u>Pass. ATD (SID-IIIs)</u>																																											
Head Injury Criteria (HIC ₃₆)	N/a	1000	238																																											
Lower Spine Resultant Acceleration	G	82	58																																											
Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	3357																																											
Maximum Thoracic Rib Deflection	mm	38*	28																																											
Maximum Abdominal Rib Deflection	mm	45*	23																																											

Technical Report Documentation Page (CONTINUED)

<i>17. Key Words</i> New Car Assessment Program (NCAP) Side Impact MDB ES-2re SID-IIs		<i>18. Distribution Statement</i> Copies of this report are available from : National Highway Traffic Safety Administration Technical Information Service Division, NPO-411 1200 New Jersey Ave, SE Washington, D.C. 20590 e-mail: tis@nhtsa.dot.gov FAX: 202-493-2833	
<i>19. Security Classif. (of this report)</i> Unclassified	<i>20. Security Classif. (of this page)</i> Unclassified	<i>21. No. of Pages</i> 164	<i>22. Price</i>

Form DOT F1700.7 (8-72)

TABLE OF CONTENTS

<u>Section</u>		<u>Page No.</u>
1	Test Purpose and Procedure	1
2	Summary of Test Results	2
3	Occupant and Vehicle Information	4
<u>Data Sheet No.</u>		<u>Page No.</u>
1	General Test and Vehicle Parameter Data	5
2	Seat, Seat Belt, Steering Wheel Adjustment and Fuel System Data	10
3	Dummy Longitudinal Clearance Dimensions	14
4	Dummy Lateral Clearance Dimensions	15
5	Camera and Instrumentation Data	16
6	Test Vehicle Accelerometer Locations	18
7	MDB Accelerometer Locations	19
8	Post-Test Observations	20
9	MDB Summary of Results	22
10	Test Vehicle Profile Measurements	23
11	Vehicle Exterior Crush Measurements	24
12	MDB Exterior Static Crush Measurements	27
13	FMVSS No. 301 Static Rollover Results	28
14	Dummy/Vehicle Temperature and Humidity Stabilization Data	30
<u>Appendix</u>		
A	Photographs	A
B	Vehicle and Dummy Response Data Plots	B
C	Dummy Configuration and Performance Verification Data	C
D	Test Equipment and Instrumentation Calibration Data	D

Test Vehicle: 2014 Jeep Patriot 5-Door SUV
Test Program: SINCAP

NHTSA Number: M20140308
Test Date: November 13, 2013

SECTION 1
TEST PURPOSE AND PROCEDURE

This moving deformable barrier side impact test is part of the MY 2014 New Car Assessment Program Side Impact Test Program, sponsored by the National Highway Traffic Safety Administration (NHTSA), under contract number DTNH22-09-D-00123. The purpose of this test is to generate comparative side impact performance in a 2014 Jeep Patriot 5-Door SUV. The side impact test was conducted in accordance with the Office of Crashworthiness Standard's Laboratory Test Procedure dated September 2013.

SECTION 2 SUMMARY OF TEST RESULTS

A 2014 Jeep Patriot 5-Door SUV was impacted on the left (driver's) side by a Moving Deformable Barrier (MDB) which was moving forward in a 27° crabbed position to the tow road guidance system at a velocity of 62.25 km/h. The target vehicle was stationary and was positioned at an angle of 63° to the line of forward motion. The side impact test was conducted by The Medical College of Wisconsin in Milwaukee, Wisconsin, on November 13, 2014. Pre-test and post-test photographs of the test vehicle, the MDB, and the dummies (ES-2re and SID-IIs) are included in this report.

Dummies were placed in the driver and left rear designated seating positions according to instructions specified in the OCWS Side Impact Laboratory Test Procedure, dated September 2013. The side impact event was documented by 11 cameras. Camera locations are included in this report.

The dummies were instrumented in the following manner:

DRIVER ATD (ES-2re)

- Primary and Redundant Head CG Tri-Axial Accelerometers
- Chest, Upper Rib, Middle Rib, and Lower Rib Y-Axis Displacement Potentiometers
- Abdomen Forward, Middle, and Rear Y-Axis Load Cells
- Lower Spine (T₁₂) Tri-Axial Accelerometers
- Pubic Symphysis Y-Axis Load Cell

PASSENGER ATD (SID-IIs)

- Primary and Redundant Head CG Tri-Axial Accelerometers
- Chest, Upper Rib, Middle Rib, and Lower Rib Y-Axis Displacement Potentiometers
- Abdomen Upper Rib and Lower Rib Y-Axis Displacement Potentiometers
- Lower Spine (T₁₂) Tri-Axial Accelerometers
- Acetabulum and Iliac Wing Y-Axis Load Cells

APPENDIX B contains the vehicle and dummy response data. Dummy configuration and performance verification data can be found in APPENDIX C of this report. APPENDIX D of this report contains the test equipment and instrumentation calibration data.

**SECTION 2
 SUMMARY OF TEST RESULTS (CONTINUED)**

Dummy injury values were recorded as follows:

DRIVER DUMMY INJURY VALUES			
Measurement Description	Driver ATD (ES-2re)		
	Units	Threshold	Result
Head Injury Criteria (HIC ₃₆)	N/a	1000	57
Maximum Thorax Rib Deflection	mm	44	28
Combined Abdominal Force	N	2500	383
Pubic Symphysis Force	N	6000	1894

PASSENGER DUMMY INJURY VALUES			
Measurement Description	Passenger ATD (SID-IIs)		
	Units	Threshold	Result
Head Injury Criteria (HIC ₃₆)	N/a	1000	238
Lower Spine (T ₁₂) Resultant Acceleration	G's	82	58
Total Pelvic Force (Sum of Acetabular and Iliac Forces)	N	5525	3357
Maximum Thoracic Rib Deflection	mm	38*	28
Maximum Abdominal Rib Deflection	mm	45*	23

**Proposed IARV*

Supplemental restraint information is given below:

SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION				
Restraint type	Left Front (Driver) Occupant Location 1		Left Rear (Passenger) Occupant Location 4	
	Mounted	Deployed	Mounted	Deployed
Frontal Airbag	Yes	Did Not Deploy	No	N/a
Knee Airbag	No	N/a	No	N/a
Side Curtain Airbag	Yes	Deployed	Yes	Deployed
Side Torso Airbag	Yes	Deployed	No	N/a
Seat Belt Pretensioner	Yes	Deployed	Yes	Deployed
Seat Belt Load Limiter	Yes	N/a	No	N/a
Other	N/a	N/a	N/a	N/a

GENERAL COMMENTS

SECTION 3 OCCUPANT AND VEHICLE INFORMATION

PRE TEST

- Data Sheet No. 1 – General Test and Vehicle Parameter Data
- Data Sheet No. 2 – Seat, Seat Belt, Steering Wheel Adjustment and Fuel System Data
- Data Sheet No. 3 – Dummy Longitudinal Clearance Dimensions
- Data Sheet No. 4 – Dummy Lateral Clearance Dimensions
- Data Sheet No. 5 – Camera and Instrumentation Data
- Data Sheet No. 6 – Test Vehicle Accelerometer Locations
- Data Sheet No. 7 – MDB Accelerometer Locations

POST TEST

- Data Sheet No. 8 – Post-Test Observations
- Data Sheet No. 9 – MDB Summary of Results
- Data Sheet No. 10 – Test Vehicle Profile Measurements
- Data Sheet No. 11 – Test Vehicle Exterior Crush Measurements
- Data Sheet No. 12 – MDB Exterior Static Crush Measurements
- Data Sheet No. 13 – Vehicle and MDB Damage Profile Distances
- Data Sheet No. 14 – FMVSS No. 301 Static Rollover Results
- Data Sheet No. 15 – Dummy/Vehicle Temperature and Humidity Stabilization Data

**DATA SHEET NO. 1
 GENERAL TEST AND VEHICLE PARAMETER DATA**

VEHICLE INFORMATION	
NHTSA No.	M20140308
Model Year	2014
Make	Jeep
Model	Patriot
Body Style	SUV
VIN	1C4NJPBA4ED559911
Body Color	Gray Metallic
Odometer Reading (km/mi)	14 mi
Engine Displacement (L)	2.0
Type/No. of Cylinders	4
Engine Placement	Lateral
Transmission Type	5-Speed Manual
Transmission Speeds	5
Overdrive	Yes
Final Drive	FWD
Roof Rack	Yes
Sunroof/T-Top	No
Running Boards	No
Tilt Steering Wheel	Yes
Power Seats	No
Anti-Lock Brakes (ABS)	Yes

VEHICLE OPTIONS	
Traction Control System (TCS)	Yes
Auto-Leveling System	No
Automatic Door Locks (ADL)	No
Power Window Auto-Reverse	No
Other Optional Features	Yes
Driver Front Airbag	Yes
Driver Curtain Airbag	Yes
Driver Head/Torso Airbag	No
Driver Torso Airbag	Yes
Driver Torso/Pelvis Airbag	No
Driver Pelvis Airbag	No
Driver Knee Airbag	No
Rear Pass. Curtain Airbag	Yes
Rear Pass. Head/Torso Airbag	No
Rear Pass. Torso Airbag	No
Rear Pass. Torso/Pelvis Airbag	No
Rear Pass. Pelvis Airbag	No
Driver Seat Belt Pretensioner	Yes
Rear Pass. Seat Belt Pretensioner	No
Driver Load Limiter	Yes
Rear Pass. Load Limiter	No
Other Safety Restraint	None Noted

Does owner's manual provide instructions to turn off automatic door locks?

No

DATA FROM CERTIFICATION LABEL			
Manufactured By	Chrysler Group, LLC	GVWR (kg)	2012
Date of Manufacture	August 2013	GAWR Front(kg)	1080
Vehicle Type	Sport Utility Vehicle	GAWR Rear (kg)	1044


VEHICLE SEATING AND CAPACITY WEIGHT INFORMATION				
	Front	Rear	Third	Total
Designated Seating Capacity (DSC)	2	3	0	5
Capacity Weight (VCW) (kg)				419.6
DSC X 68.04 (kg)				340.2
Cargo Weight (RCLW) (kg)				79.4

(A)
 (B)
 (A-B)

**DATA SHEET NO. 1
 GENERAL TEST AND VEHICLE PARAMETER DATA (CONTINUED)**

VEHICLE SEAT TYPE							
Seating Location	Type of Seat Pan				Type of Seat Back		
	Bucket	Bench	Split Bench	Contoured	Fixed	Adjustable	
						W/ Lever	W/ Knob
Front Seat	X					X	
Rear or Second Row Seat			X	X	X	N/a	
Third Row Seat							

DATA SHEET NO. 1
GENERAL TEST AND VEHICLE PARAMETER DATA (CONTINUED)

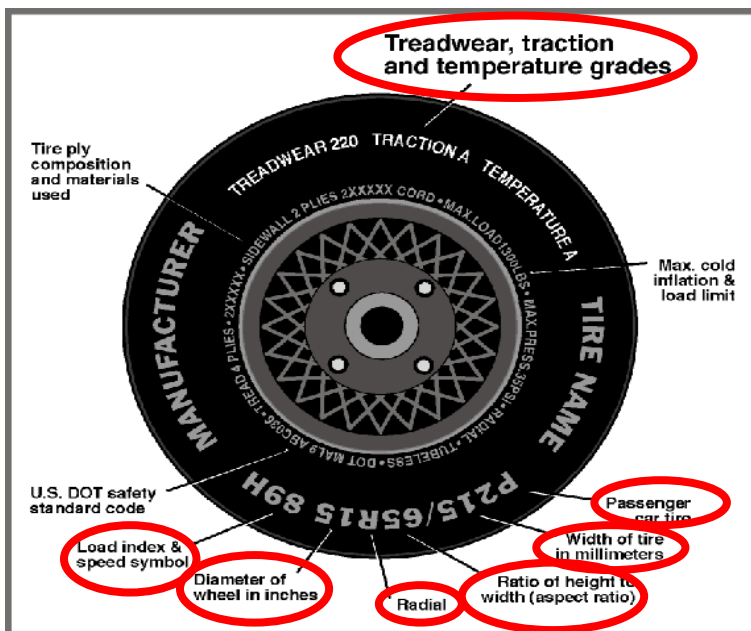

VEHICLE TIRE INFORMATION		
Measured Parameter	Front	Rear
Max. Tire Pressure (kPa)	300	300
Cold Pressure (kPa)	241.3	241.3
Recommended Tire Size	P205/70R16	P205/70R16
Tire Size on Vehicle	P205/70R16	P205/70R16
Tire Manufacturer	Goodyear	Goodyear
Tire Model	Eagle LS	Eagle LS
Treadwear	400	400
Traction	A	A
Temperature Grades	B	B
Tire Plies Sidewall	2	2
Tire Plies Body	4	4
Load Index/Speed Symbol	96T	96T
Tire Material	Polyester & Steel	Polyester & Steel
DOT Safety Code Left	M60W CUER 3113	M60W CUER 3113
DOT Safety Code Right	M60W CUER 3113	M60W CUER 3113

**DATA SHEET NO. 1
 GENERAL TEST AND VEHICLE PARAMETER DATA (CONTINUED)**

TIRE PRESSURES					
	Units	LF	RF	LR	RR
As Delivered	kPa	241.3	241.3	241.3	241.3
Tire Placard	kPa	241.3	241.3	241.3	241.3
Owner's Manual	kPa	241.3	241.3	241.3	241.3
As Tested	kPa	241.3	241.3	241.3	241.3

MDB TIRE SPECIFICATIONS						
	Units	Requirement	LF	RF	LR	RR
Tire Size		205/75R15	P205/75R15	P205/75R15	P205/75R15	P205/75R15
Tire Pressure	kPa	200 +/- 21	200	200	200	200

TEST VEHICLE WEIGHTS										
	Units	As Delivered (UVW)			As Tested (ATW)			Fully Loaded		
		Front Axle	Rear Axle	Total	Front Axle	Rear Axle	Total	Front Axle	Rear Axle	Total
Left	kg	411.0	299.4		454.0	380.1		459.1	384.8	
Right	kg	394.6	301.6		381.9	388.3		388.8	378.5	
Ratio	%	57.3	42.7		52.1	47.9		52.6	47.4	
Totals	kg	805.6	601.0	1406.6	835.9	768.4	1604.3	847.9	763.3	1611.2

TARGET TEST WEIGHT CALCULATION		
	Units	
Total Delivered Weight (UVW)	kg	1406.6
Sum of Actual Weight of 2 P572 ATDs used	kg	125.2
Rated Cargo/Luggage Weight (RCLW)	kg	79.4
Calculated Target Vehicle Test Weight (TVT _W)	kg	1611.2

(A)
(B)
(C)
(A + B + C)

Does the measured As Tested Vehicle Weight lie within the required weight range (i.e. Calculated Test Vehicle Target Weight – 4.5 kg to 9 kg)?

Yes

**DATA SHEET NO. 1
 GENERAL TEST AND VEHICLE PARAMETER DATA (CONTINUED)**

TEST VEHICLE ATTITUDE AND CG				
Measurement description	Units	Fully Loaded	As Tested	Meets Requirement***
LF	mm	806	809	Yes
RF	mm	811	810	Yes
RR	mm	787	791	Yes
LR	mm	795	795	Yes
Vehicle CG (Aft of Front Axle)	mm	1248.3	1262.1	
Vehicle CG (Left(+))/Right(-) from Longitudinal Centerline)	mm	42.0	35.2	

***The "As Tested" vehicle attitude measurements must be equal to or within +/- 10 mm of the "Fully Loaded" vehicle attitude measurements at each wheel well. "Yes" or "No" is indicated.

WEIGHT OF BALLAST AND VEHICLE COMPONENTS REMOVED TO MEET TVTW	
Ballast	Weight (kg)
Removed spare tire & floor cover, plastic cover under engine, and jack to achieve calculated "As Tested" weight.	28.6

DATA SHEET NO. 2
SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA

SCRL ANGLE RANGE			
Seat	SCRL (°)		
	Max	Min	Mid
Driver Seat	Fixed	Fixed	Set at 0° for test
Front Passenger Seat	Fixed	Fixed	Set at 0° for test
Front Center Seat*			
Struck Side Rear Seat	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Fixed
Rear Center Seat*			

*If applicable

SCRL ANGLE RANGE						
Seat	As Tested SCRL Angle (Mid) (°)	As Tested SCR Height (mm)	SCR Height Position	SCR Height (mm)		
				Rearmost	Mid-Fore/Aft	Forward- Most
Driver's Seat	N/a**	N/a**	Max	N/a**	N/a**	N/a**
	0.0	40	Mid	51	40	30
	N/a**	N/a**	Min	N/a**	N/a**	N/a**
Front Passenger Seat	N/a**	N/a**	Max	N/a**	N/a**	N/a**
	0.0	32	Mid	44	33	23
	N/a**	N/a**	Min	N/a**	N/a**	N/a**
Front Center Seat*			Max			
			Mid			
			Min			
Struck Side Rear Seat	Fixed	Fixed	Max	Fixed	Fixed	Fixed
	Fixed	Fixed	Mid	Fixed	Fixed	Fixed
	Fixed	Fixed	Min	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Max	Fixed	Fixed	Fixed
	Fixed	Fixed	Mid	Fixed	Fixed	Fixed
	Fixed	Fixed	Min	Fixed	Fixed	Fixed
Rear Center Seat*			Max			
			Mid			
			Min			

*If applicable


DATA SHEET NO. 2
SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA (CONTINUED)

SEAT FORE/AFT POSITION				
Seat	Total Fore/Aft Travel		Test Position from Forwardmost Position	
	mm	Detent*	mm	Detent*
Driver Seat	260	38	130	19
Front Passenger Seat	260	38	130	19
Front Center Seat*				
Struck Side Rear Seat	Fixed	N/a	Fixed	N/a
Non-Struck Side Rear Seat	Fixed	N/a	Fixed	N/a
Rear Center Seat*				

*If applicable

Seat Back Angle Adjustment

The driver's seat back is positioned to the manufacturer's designated design angle. The front center and front passenger's seat backs are positioned in a similar manner as the driver's seat back. The struck side rear seat back is positioned such that the dummy's head is level. The rear center and non-struck side rear outboard seat backs are positioned in a similar manner as the struck-side rear seat back.

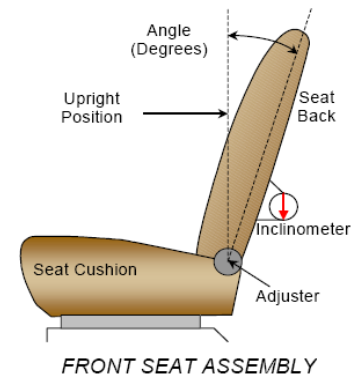

SEAT BACK ANGLE ADJUSTMENT				
Seat	Total Seat Back Angle Range		Test Position from Most Upright	
	Degrees	Detents*	Degrees	Detents*
Driver Seat w/ Seated Dummy	60.0	41	12.7	5
Front Passenger Seat	60.0	39	12.4	5
Front Center Seat*				
Struck Side Rear Seat	Fixed	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Fixed	Fixed
Rear Center Seat*				

*If applicable

DATA SHEET NO. 2
SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA (CONTINUED)

Seat Belt Anchorage Adjustment

Seat belt anchorages are adjusted in accordance with the information provided by the manufacturer on Form No. 1.

SEAT BELT ANCHORAGE ADJUSTMENT		
	Total # of Positions	Placed in Position #
Driver Seat	4	H
Rear Seat	Fixed	As Positioned


Head Restraint Adjustment

The driver's head restraint is adjusted to the highest and most forward in-use position. The struck-side rear passenger's head restraint is adjusted to the lowest and most full forward in-use position.

HEAD RESTRAINT ADJUSTMENT		
	Total # of Positions	Placed in Position #
Driver Seat	5	Highest Position
Rear Seat	1	Lowest Detent

Steering Column Adjustment

Steering wheel and column adjustments are made so that the steering wheel hub is at the center of its geometric locus it describes when it moves through its full range of motion.

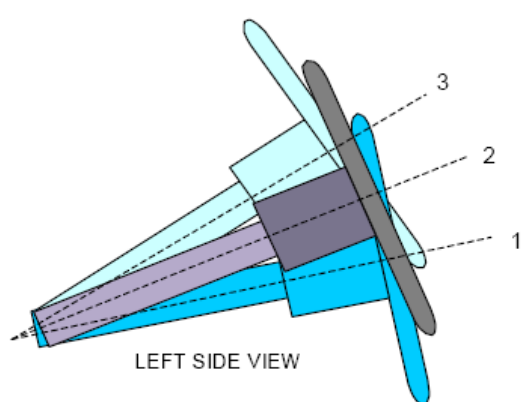STEERING COLUMN ADJUSTMENT			
	Degrees	Fore/Aft Position (mm)	 <p align="center">LEFT SIDE VIEW STEERING COLUMN ASSEMBLY</p>
Lowermost, Pos. No. 1	62.0	N/a	
Geometric Center, Pos. No. 2	65.3	N/a	
Uppermost, Pos. No. 3	68.6	N/a	
Telescoping Steering Wheel Travel	Non-telescoping	N/a	
Test Position	65.3	N/a	

DATA SHEET NO. 2
SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA (CONTINUED)

FUEL TANK CAPACITY DATA			
Description	Units	Value	
Usable Capacity of "Standard Tank"	L	51.5	<p align="center">VEHICLE FUEL TANK ASSEMBLY</p>
Usable Capacity of "Optional Tank"	L	51.1	
Usable Capacity of Standard Tank	L	51.5	
Usable Capacity of Optional Tank	L	51.1	
93% of Usable Capacity	%	47.9	
Actual Amount of Solvent Used in Test	L	48.4	
1/3 of Usable Capacity			


Fuel Pump

The vehicle is equipped with an electronic fuel pump. Key is "ON" position. The fuel pump is on the left side.

Is the Actual Amount of Solvent Used in the test equal to 93% +/- 1% of the Usable Capacity stated in on Form No. 1?


Yes

**DATA SHEET NUMBER 3
 DUMMY LONGITUDINAL CLEARANCE DIMENSIONS**

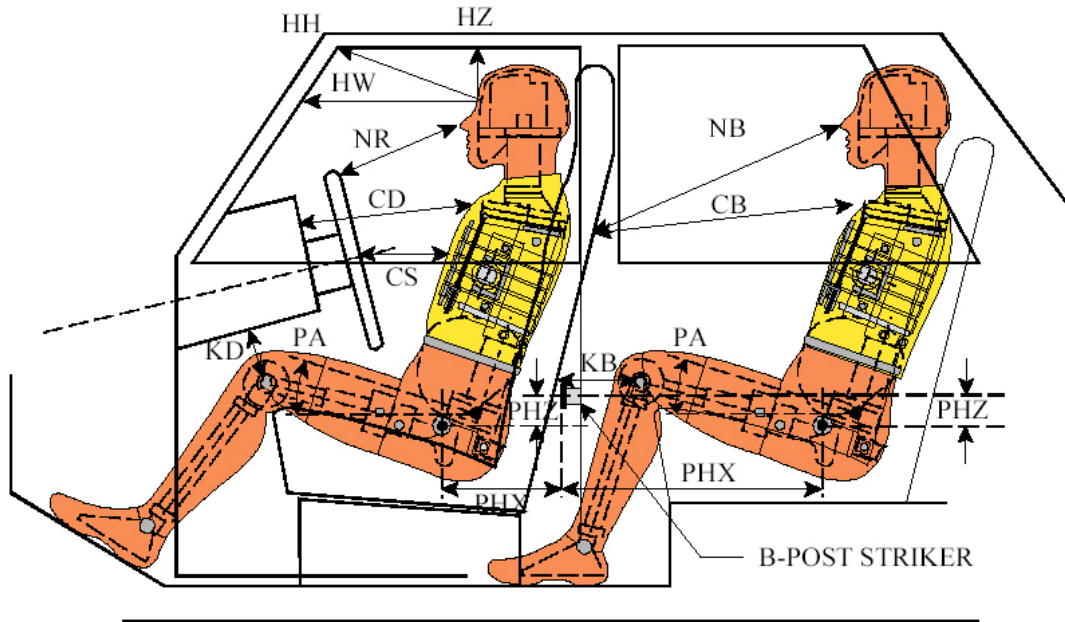


DUMMY LONGITUDINAL CLEARANCE DIMENSION INFORMATION						
Driver Code	Pass. Code	Measurement Description	Driver		Passenger	
			Length (mm)	Angle	Length (mm)	Angle
HH		Header to Header	586			
HW		Header to Windshield	804			
HZ	HZ	Head to Roof Liner	212		334	
NR	NB	Nose to Rim/Seat Back	453		555	
CD	CB	Chest to Dash/Seat Back	610		546	
CS		Chest to Steering Wheel	61			
KD(L)/KDA(L) [°]	KB(L)/KBA(L) [°]	Left Knee to Dash/Seat Back	157	15.0	324	9.7
KD(R)/KDA(R) [°]	KB(R)/KBA(R) [°]	Right Knee to Dash/Seat Back	136	18.3	327	10.1
PAX [°]	PAX [°]	Pelvic Tilt Angle X		0.0		0.0
	PAY [°]	Pelvic Tilt Angle Y		18.7		18.4
PHX	PHX	Hip Point to Striker (X-Axis)	199		139	
PHZ	PHZ	Hip Point to Striker (Z-Axis)	118		286	

**DATA SHEET NUMBER 4
 DUMMY LATERAL CLEARANCE DIMENSIONS**

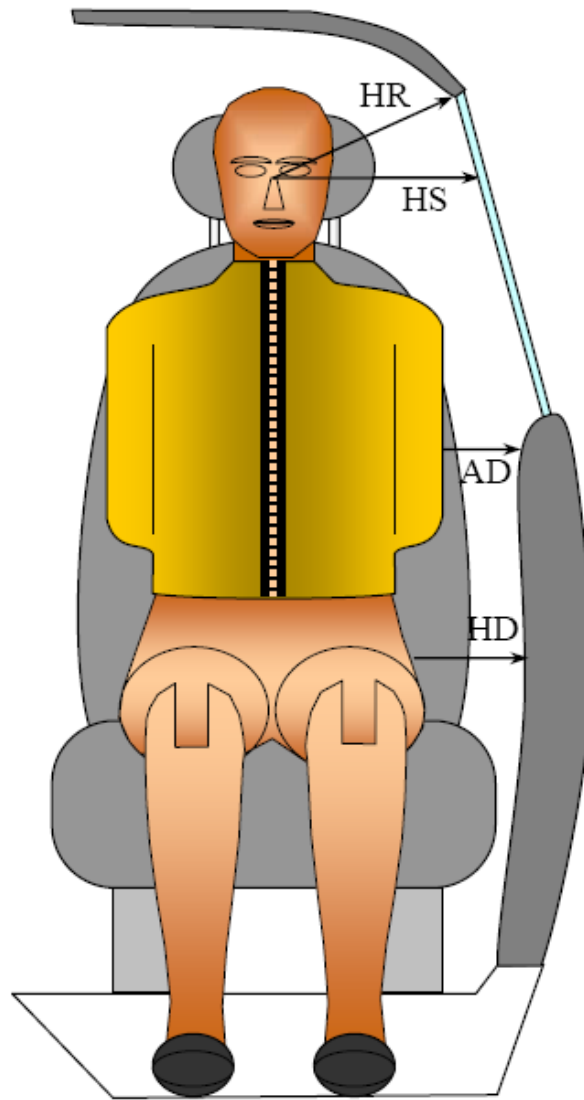

DUMMY LATERAL CLEARANCE DIMENSION INFORMATION				
Code	Description	Units	Driver	Passenger
HR	Head to Side Header	mm	218	286
HS	Head to Side Window	mm	371	394
AD	Arm to Door	mm	197	205
HD	Hip Point to Door	mm	164	158

**DATA SHEET 5
 CAMERA AND INSTRUMENTATION DATA**

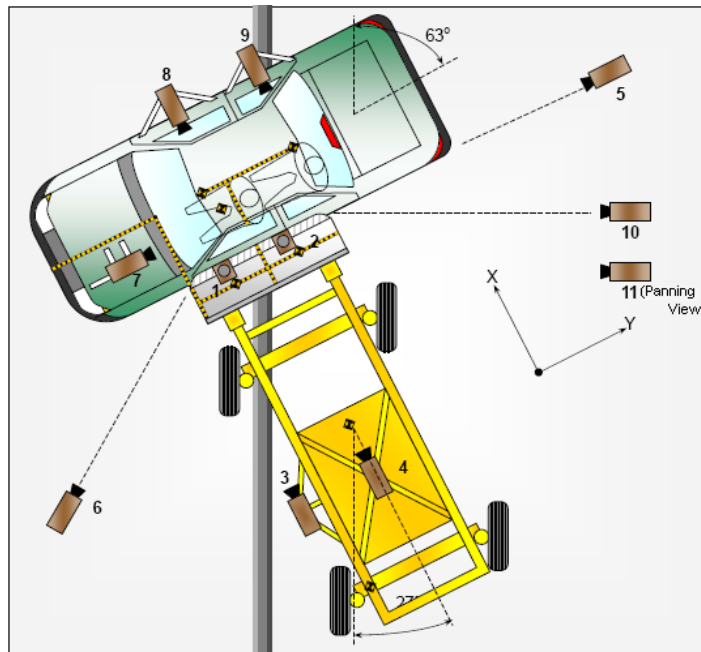

	View	Coordinates †			Lens Length	Operating Frame Rate
		X	Y	Z		
		mm	mm	mm	mm	fps
1	Overhead Overall	1802	2275	-5964	10	1000
2	Overhead Close-up	989	767	-5924	25	1000
3	Left Impact Point (MDB)	-2287	-162	-784	25	1000
4	Side Overall (MDB)	-2166	938	-1287	12.5	1000
5	Rear	-1354	7868	-1396	35	1000
6	Left Front	-3112	-7726	-1408	25	1000
7	Driver Front (OB)				12.5	1000
8	Driver Side (OB)				12.5	1000
9	Passenger Side (OB)				12.5	1000
10	Real-time Left Rear				N/a	30
11	Real – Time Inrun				N/a	30

Origin		Orientation	
X	Impact Point	X	+(X) To Front of MDB
Y	Impact Point	Y	+(Y) To Right of MDB
Z	Ground	Z	+(Z) Down


*All measurements accurate to +/- 6 mm

DATA SHEET 5
CAMERA AND INSTRUMENTATION DATA (CONTINUED)

Why did the cameras not operate?

INSTRUMENTATION	
Driver Dummy Channels	16
Passenger Dummy Channels	16
Vehicle Structure Accelerometers	23
MDB Accelerometers	5
Total	60

DATA SHEET 6
TEST VEHICLE ACCELEROMETER LOCATIONS

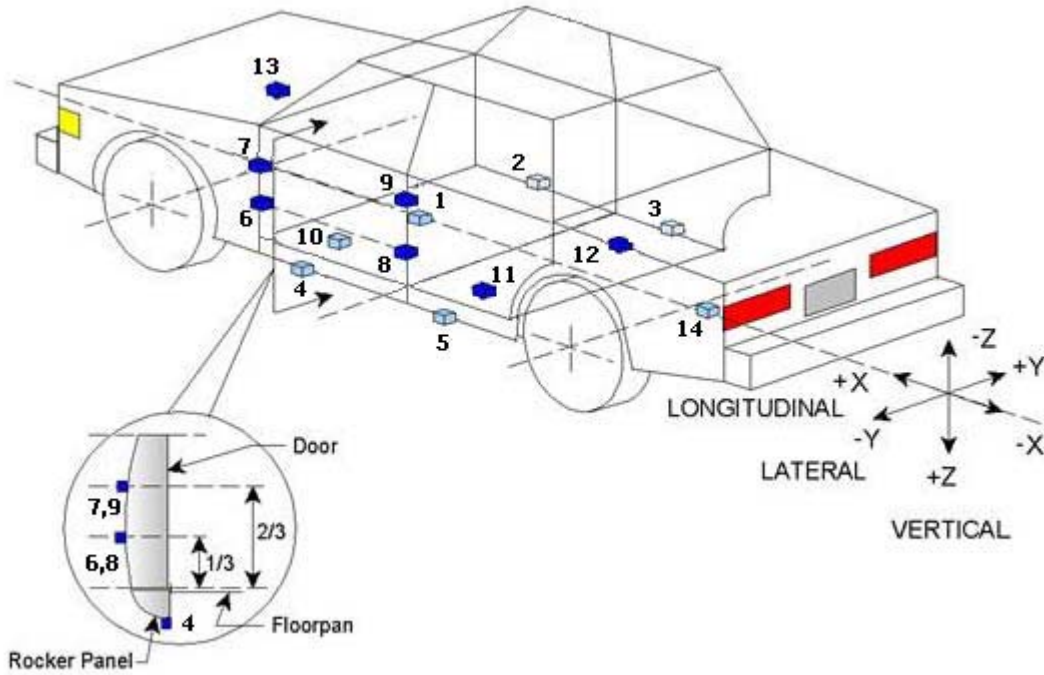


TEST VEHICLE ACCELEROMETER LOCATIONS				
Loc. No.	Accelerometer Location	Measurements (mm)		
		X	Y	Z
1	Vehicle CG	2614.9	87.3	200.0
2	Right Sill at Front Seat	2514.0	707.0	415.8
3	Right Sill at Rear Seat	1581.8	707.5	400.5
4	Left Sill at Front Door	2505.4	-713.0	416.3
5	Left Sill at Rear Door	1572.1	-713.4	412.1
6	A-Post Lower	2958.9	-784.9	72.3
7	A-Post Middle	2975.1	-775.2	-163.0
8	B-Post Lower	1975.9	-794.7	11.3
9	B-Post Middle	1969.1	-792.5	-223.7
10	Front Seat Track	2287.4	-535.4	220.0
11	Rear Seat Structure	1665.5	-346.7	255.4
12	Rt. Rear Occ. Compartment	1132.0	511.3	67.9
13	Engine Block	3721.8	151.3	-179.5
14	Rear Above Axle	832.6	6.02	178.6

Reference:

- X - Rear surface of vehicle (+ forward)*
- Y - Vehicle centerline (+ right)*
- Z - Ground plane (+ down)*

DATA SHEET 7
MDB ACCELEROMETER LOCATIONS

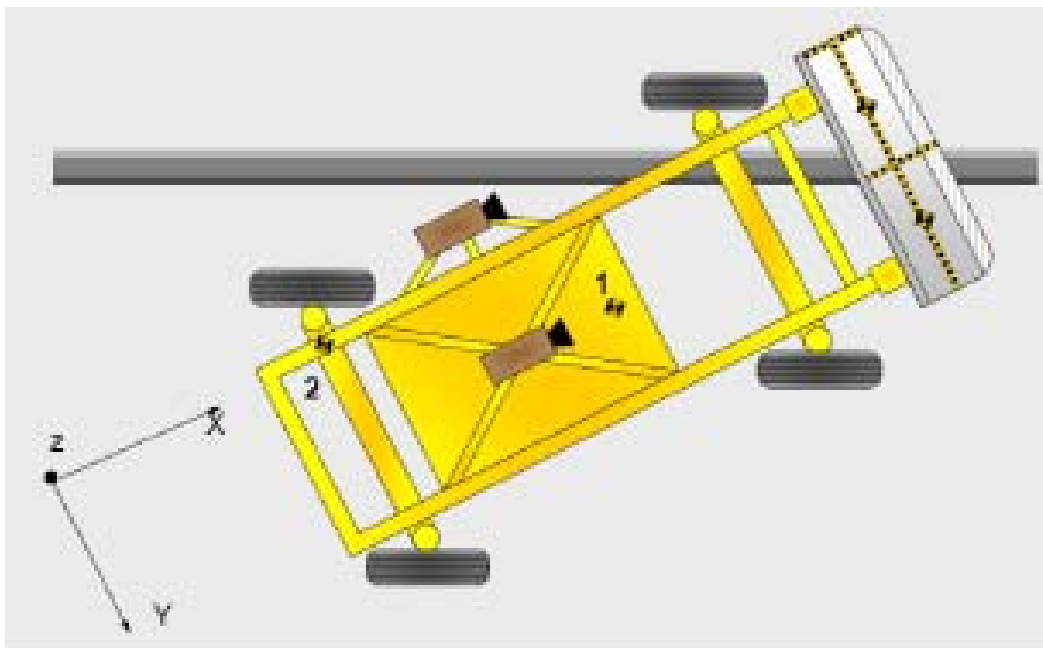

MDB ACCELEROMETER LOCATIONS				
Loc No.	Accelerometer Locations	Coordinates (mm)		
		X	Y	Z
1	MDB CG	1113	-1	311
2	MDB Rear	2812	-614	585

Reference

- X - Face of MDB (+ forward)*
- Y - MDB centerline (+ to right)*
- Z - Ground plane (+ down)*

**DATA SHEET NUMBER 8
 POST-TEST OBSERVATIONS**

TEST DUMMY INFORMATION AND CONTACT POINTS		
Dummy Body Part	Front Seat Dummy (ES-2re)	Rear Seat Dummy (SID-IIs)
Face	To Side Curtain Airbag	To Side Curtain Airbag
Top of Head	To Side Curtain Airbag & Roof Rail	To Side Curtain Airbag & Roof Rail
Left Side of Head	To Side Curtain Airbag	To Side Curtain Airbag
Back of Head	Along Head Rest to the Side Curtain Airbag	Rebounds Into Head Rest
Left Shoulder	To Side Curtain Airbag	To Interior Door Panel
Upper Torso	To Seat Mounted Side Airbag	To Interior Door Panel
Lower Torso	To Seat Mounted Side Airbag and Interior Door Panel	To Interior Door Panel
Left Hip	To Interior Door Panel	To Interior Door Panel
Left Knee	To Interior Door Panel	To Interior Door Panel

POST-TEST DOOR PERFORMANCE					
Description	Struck Side		Non-Struck Side		Rear Hatch/ Other Door
	Front	Rear	Front	Rear	
Remained Closed and Operational	No	No	Yes	Yes	Yes
Total Separation from Vehicle at Hinges of Latches	No	No	No	No	No
Latch of Hinge Systems Pulled Out of Their Anchorages	No	No	No	No	No
Disengaged from Latched Position	No	No	No	No	No
Latch Separated from Striker	No	No	No	No	No
Jammed Shut	Yes	Yes	No	No	No
If Door Opened at Striker, Record Width of Opening at Striker (mm)	N/a	N/a	N/a	N/a	N/a

POST-TEST SEAT PERFORMANCE				
Description	Struck Side		Non-Struck Side	
	Front	Rear	Front	Rear
Seat Movement Along Seat Track	No	No	No	No
Seat Disengagement from Floor Pan	No	No	No	No
Seat Back Movement from Initial Position	Yes	No	No	No
Seat Back Collapse	No	No	No	No

**DATA SHEET NUMBER 8
 POST-TEST OBSERVATIONS (CONTINUED)**

POST TEST STRUCTURAL OBSERVATIONS	
Critical Areas of Performance	Observations/Conclusions
Pillar Performance	No Damage
Sill Separation	Max Sill Separation of 90 mm at 1950 Line
Windshield Damage	No Damage
Window Damage	No Damage
Other Notable Effects	None Noted

SUPPLEMENTAL RESTRAINT INFORMATION				
Restraint Type	Struck Side Driver		Struck Side Rear Passenger	
	Mounted	Deployed	Mounted	Deployed
Frontal Airbag	Yes – Steering Wheel	Did Not Deploy		
Knee Airbag	No	N/a		
Side Curtain Airbag	Yes – Side Header	Deployed Properly	Yes – Side Header	Deployed Properly
Side Torso Airbag	Yes – Seat Back	Deployed Properly	No	N/a
Seat Belt Pretensioner	Yes	Deployed Properly	No	N/a
Seat Belt Load Limiter	Yes	N/a	No	N/a
Other	No	N/a	No	N/a

IMPACT POINT LOCATION DATA			
Measured Parameter	Units	Tolerance	Value
Vehicle Wheel Base	mm		2635
Vertical Impact Reference Line (Aft of Front Axle)(Intended Impact Point)	mm		378
Actual Impact Point (Aft of Front Axle)	mm		376
Horizontal Offset (+ forward / - rear)	mm	+/- 50 of Intended Impact Point	2
Vertical Offset (+ down / - up)	mm	+/- 20 of Intended Impact Point	0

**DATA SHEET NUMBER 9
 MDB SUMMARY OF RESULTS**


MDB SPECIFICATIONS	
Measurement Description	Length (mm)
Overall Width of Framework Carriage	1250
Overall Length Including Honeycomb Frame	4116
Wheel Base of Framework Carriage	2578
CG Location of Front Axle	1112

MDB WEIGHTS				
	Units	Front Axle	Rear Axle	Total
Left	kg	446.3	235.9	682.2
Right	kg	312.5	366.0	678.5
Ratio	%	55.8	44.2	100.0
Totals	kg	758.8	601.9	1360.9

SPEED AND ANGLE AT IMPACT DATA			
Measured parameter	Units	Requirement	Value
Trap No. 1 Velocity (Primary)	km/h	61.1 to 62.7	62.25
Trap No. 2 Velocity (Secondary)	km/h	61.1 to 62.7	62.20
MDB CL to Target Vehicle CL	degrees	88.5 to 91.5	90
MDB Forward Line of Motion to Target Vehicle	degrees	62.5 to 63.5	63.0
MDB Crabbed Angle to MDB Forward Line of Motion	degrees	26 to 28	27.0


MAXIMUM STATIC CRUSH OF HONEYCOMB IMPACT FACE					
Vertical Location			From Centerline		Maximum Crush
Row	Description	Height	Distance	Direction	
A	Center of Bumper	432	700	Right	252
B	Top of Bumper	533	700 & 800	Right	186
C	Mid-Level	686	800	Left	161
D	Top of Stack	813	800	Left	192

**DATA SHEET NUMBER 10
 TEST VEHICLE PROFILE MEASUREMENTS**

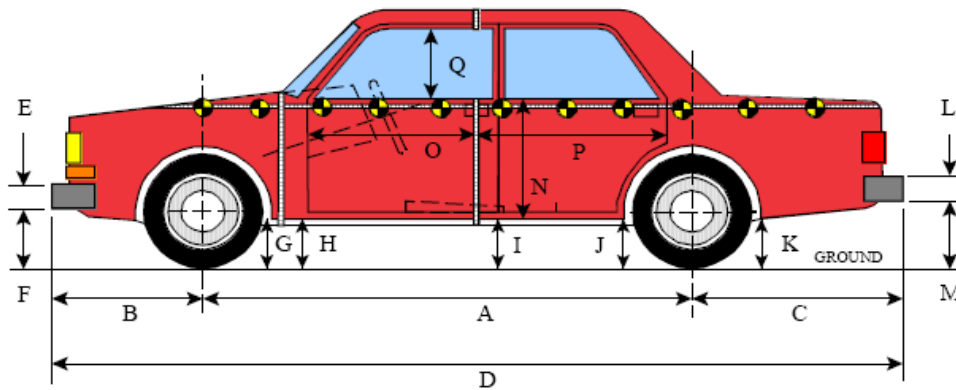

VEHICLE PRE - AND POST - TEST MEASUREMENT INFORMATION				
Code	Description	Pre test	Post test	Difference
		mm	mm	mm
A	Wheelbase	2635	2630	-5
B	Front Axle to FSOV	712	700	-12
C	Rear Axle to RSOV	757	762	5
D	Total Length at Centerline	4415	4412	-3
E	Front Bumper Thickness	185	185	0
F	Front Bumper Bottom to Ground	433	442	9
G	Sill Height at Front Wheel Well	260	262	2
H	Sill Height at Front Door Leading Edge	297	298	1
I	Sill Height at B-Pillar	301	306	5
J1	Sill Height at Rear Wheel Well	265	249	-16
J2	Pinch Weld Height at Rear Wheel Well	270	257	-13
K	Sill Height Aft of Rear Wheel Well	364	340	-24
L	Rear Bumper Thickness	170	170	0
M	Rear Bumper Bottom to Ground	523	500	-23
N	Sill Height to Bottom of Front Window Sill	760	748	-12
O	Front Door Leading Edge to Impact C/L	1038	1057	19
P	Rear Door Trailing Edge to Impact C/L	867	835	-32
Q	Front Window Opening	408	406	-2
R	Right Side Length	4104	4110	6
S	Left Side Length	4104	4092	-12
T	Maximum Vehicle Width	1765	1653	-112

**DATA SHEET NUMBER 11
 VEHICLE EXTERIOR CRUSH MEASUREMENTS**

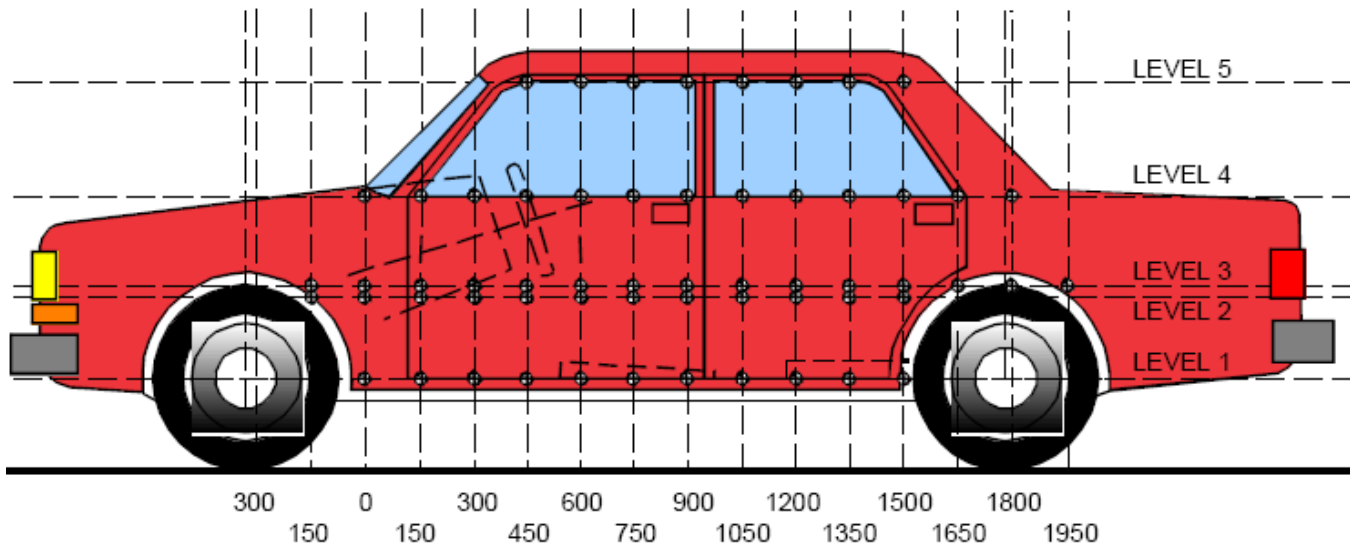


LEFT SIDE VIEW

MAXIMUM EXTERIOR CRUSH MEASUREMENTS				
Level	Measurement Description	Height Above Ground	Maximum Exterior Static Crush	Distance from Impact
1	Sill Top	319	55	600
2	Occupant Hip Point	704	175	900
3	Mid-Door	712	176	1500
4	Window Sill	1067	58	1350
5	Window Top	1540	13	1200


DATA SHEET NUMBER 11
TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS (CONTINUED)

EXTERIOR CRUSH MEASUREMENTS AT EACH LEVEL																
Level	1			2			3			4			5			
	Pre	Post	Crush	Pre	Post	Crush	Pre	Post	Crush	Pre	Post	Crush	Pre	Post	Crush	
DISTANCE IN MILLIMETERS (mm) FROM IMPACT POINT	-1050															
	-900															
	-750				298	302	4	300	302	2	467	471	4			
	-600										448	453	5			
	-450										429	435	6			
	-300										412	418	6			
	-150										398	404	6			
	0				279	314	35	278	314	36	387	393	6			
	150	334	384	50	297	374	77	297	370	73	372	385	13			
	300	332	383	51	295	413	118	295	410	115	361	386	25			
	450	330	382	52	295	435	140	294	434	140	365	382	17			
	600	329	384	55	293	453	160	293	453	160	359	379	20	531	541	10
	750	329	380	51	292	466	174	291	465	174	358	377	19	535	537	2
	900	330	382	52	290	465	175	290	461	171	356	377	21	524	535	11
	1050	330	379	49	288	438	150	288	434	146	354	377	23	525	536	11
	1200	331	379	48	289	407	118	289	404	115	352	405	53	524	537	13
	1350	332	379	47	290	460	170	291	457	166	353	411	58	527	538	11
	1500	334	373	39	293	467	174	293	469	176	353	403	50	530	538	8
	1650	337	367	30	295	451	156	294	455	161	353	395	42	530	539	9
	1800	340	360	20	290	427	137	292	430	138	352	385	33	533	541	8
	1950				272	297	25	271	297	26	351	376	25	535	545	10
	2100										353	383	30	540	545	5
	2250										353	376	23	544	548	4
	2400										358	372	14	550	552	2
2550							284	291	7	366	375	9	557	557	0	
2700				320	323	3	321	325	4	377	382	5	567	566	-1	
2850																
3000																
3150																
3330																

DATA SHEET NUMBER 11
TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS (CONTINUED)

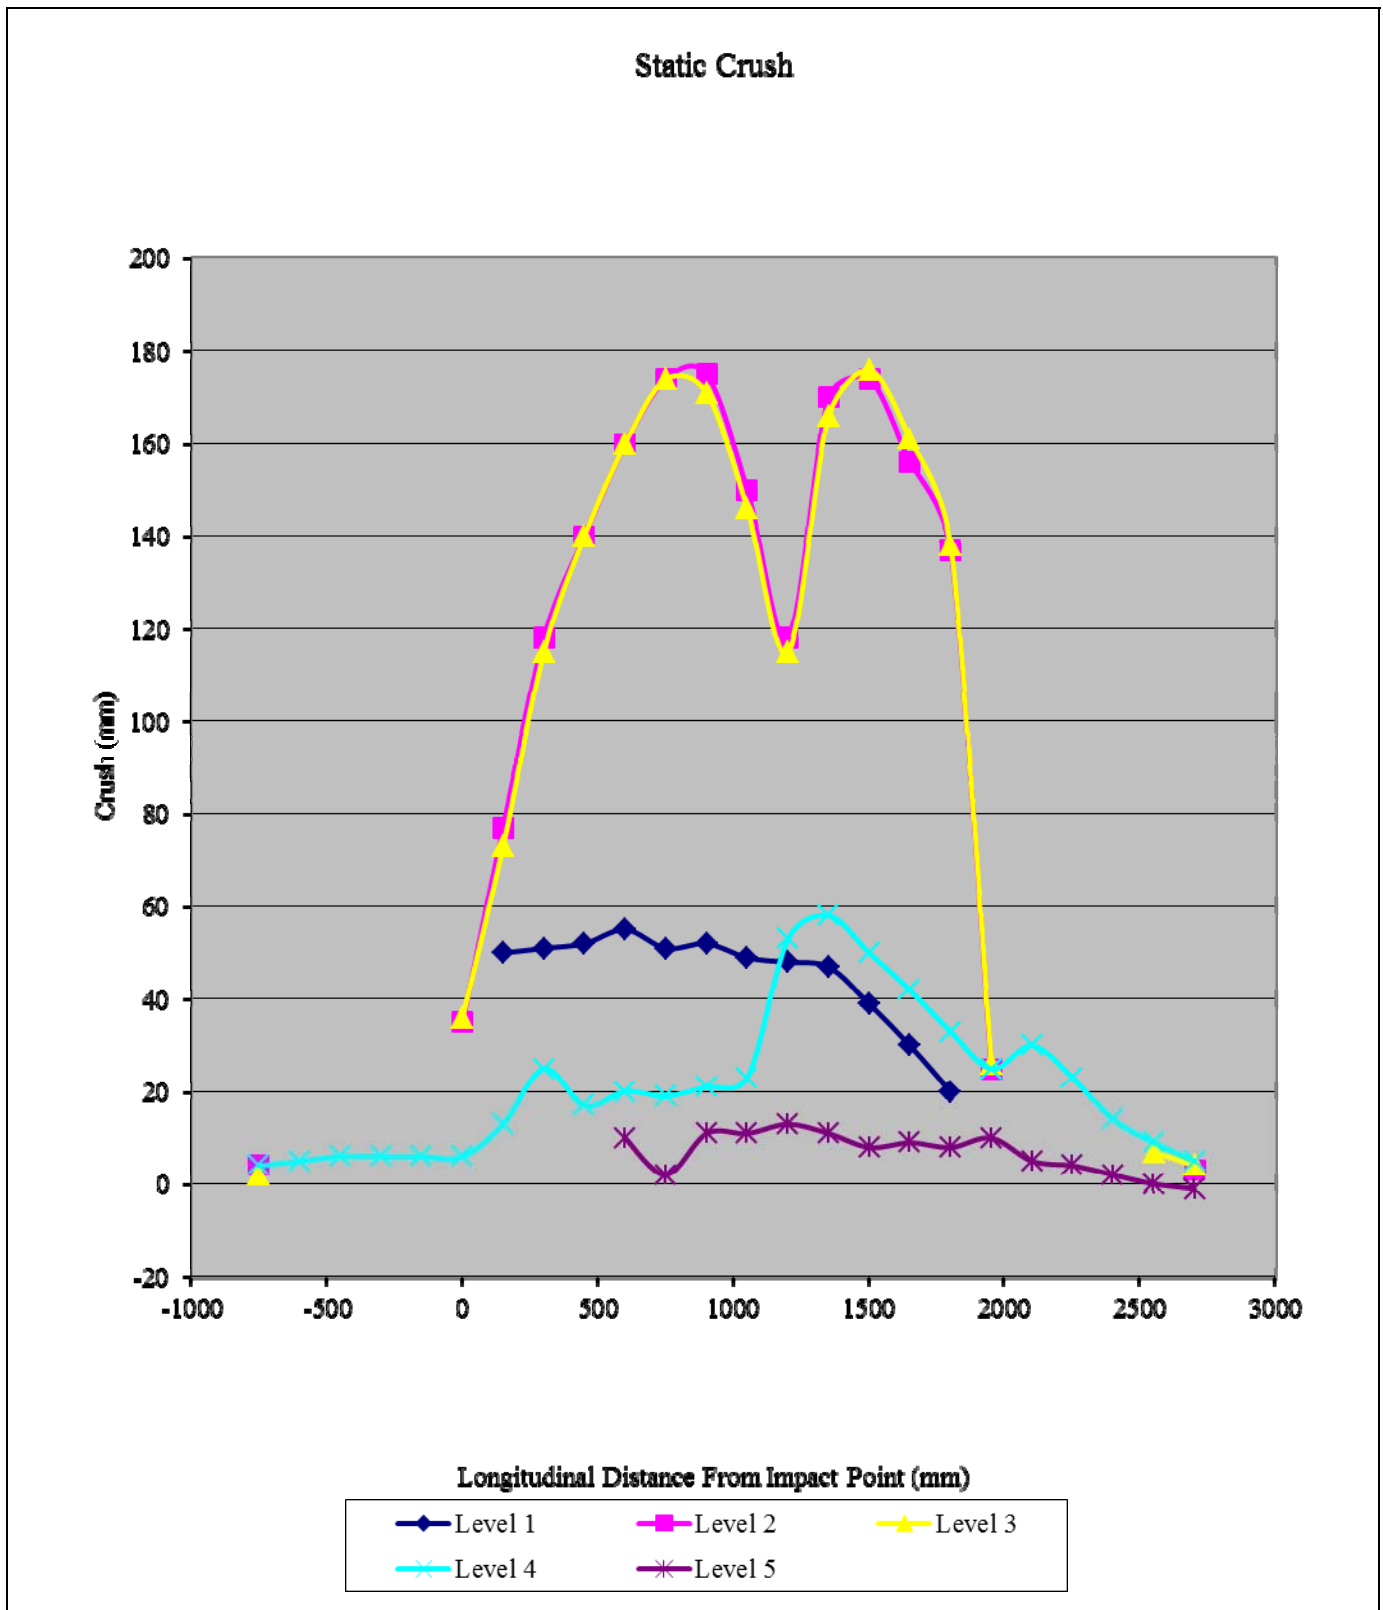

DATA SHEET NUMBER 12
MDB EXTERIOR STATIC CRUSH MEASUREMENTS

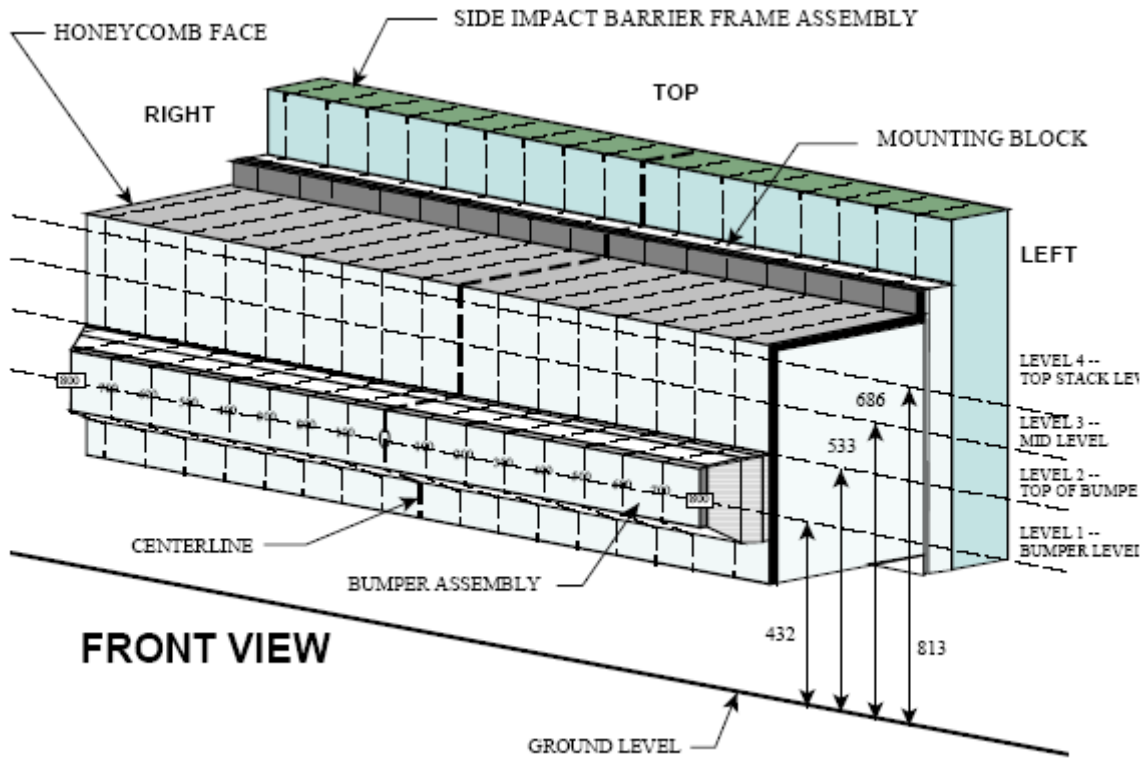

NOTE: Dimensions are shown in millimeters, mm


DEFORMABLE BARRIER STATIC CRUSH																	
	Distance Left of Center								C _L	Distance Right of Center							
	800	700	600	500	400	300	200	100	0	100	200	300	400	500	600	700	800
1	185	184	182	183	186	185	188	190	191	194	198	199	204	216	224	252	248
2	156	140	139	139	140	142	142	139	126	111	111	111	125	139	164	186	186
3	161	126	90	77	73	65	59	66	79	102	131	116	91	80	82	96	107
4	192	147	112	100	88	79	80	80	81	123	141	125	92	77	72	82	93

DATA SHEET NO. 14
FMVSS 301 STATIC ROLLOVER RESULTS

Temperature at Time of Impact: 21° C Test Time: 2:25 pm

STODDARD SOLVENT SPILLAGE MEASUREMENTS				
Period	Description	Maximum Allowable Spillage	Spillage	
			Amount	Location
A	From Impact Until Vehicle Motion Ceases	1 oz	0	N/a
B	5 Minutes After Vehicle Motion Ceases	5 oz	0	N/a
C	Next 25 Minutes	1 oz/minute	0	N/a
D	Spillage Details:			

FMVSS 301 STATIC ROLLOVER

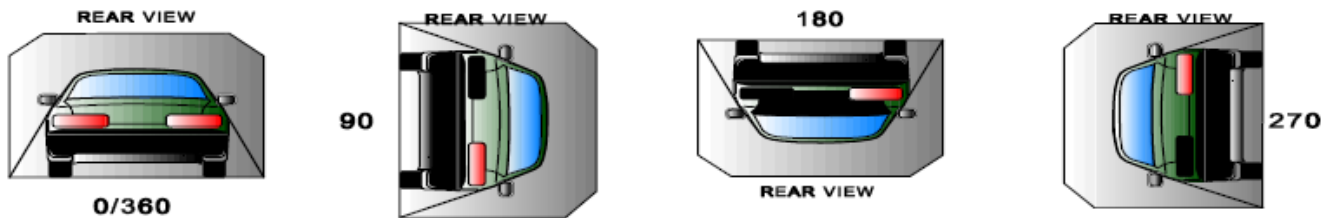

ROLLOVER SOLVENT COLLECTION TIME TABLE IN SECONDS			
Test Phase	Rotation Time	Hold Time	Total Time
0° to 90°	66	300	366
90° to 180°	65	300	365
180° to 270°	66	300	366
270° to 360°	66	300	366


DATA SHEET NO. 14
FMVSS 301 STATIC ROLLOVER RESULTS (CONTINUED)

FMVSS No. 301 ROLLOVER SPILLAGE TABLE				
	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° to 90°	0	0	0	N/a
90° to 180°	0	0	0	N/a
180° to 270°	0	0	0	N/a
270° to 360°	0	0	0	N/a

FMVSS No. 301 STATIC ROLLOVER - SPILLAGE				
	First five minutes (oz)	Sixth minute (oz)	Seventh minute (oz)	Eighth minute (oz)
Max allowable leakage	5.0	1.0	1.0	1.0
0° to 90°	0	0	0	N/a
90° to 180°	0	0	0	N/a
180° to 270°	0	0	0	N/a
270° to 360°	0	0	0	N/a

ROLLOVER SOLVENT SPILLAGE LOCATION TABLE	
Test Phase	Spillage Location
0° to 90°	N/a
90° to 180°	N/a
180° to 270°	N/a
270° to 360°	N/a

DATA SHEET 15
DUMMY/VEHICLE TEMPERATURE AND HUMIDITY STABILIZATION DATA

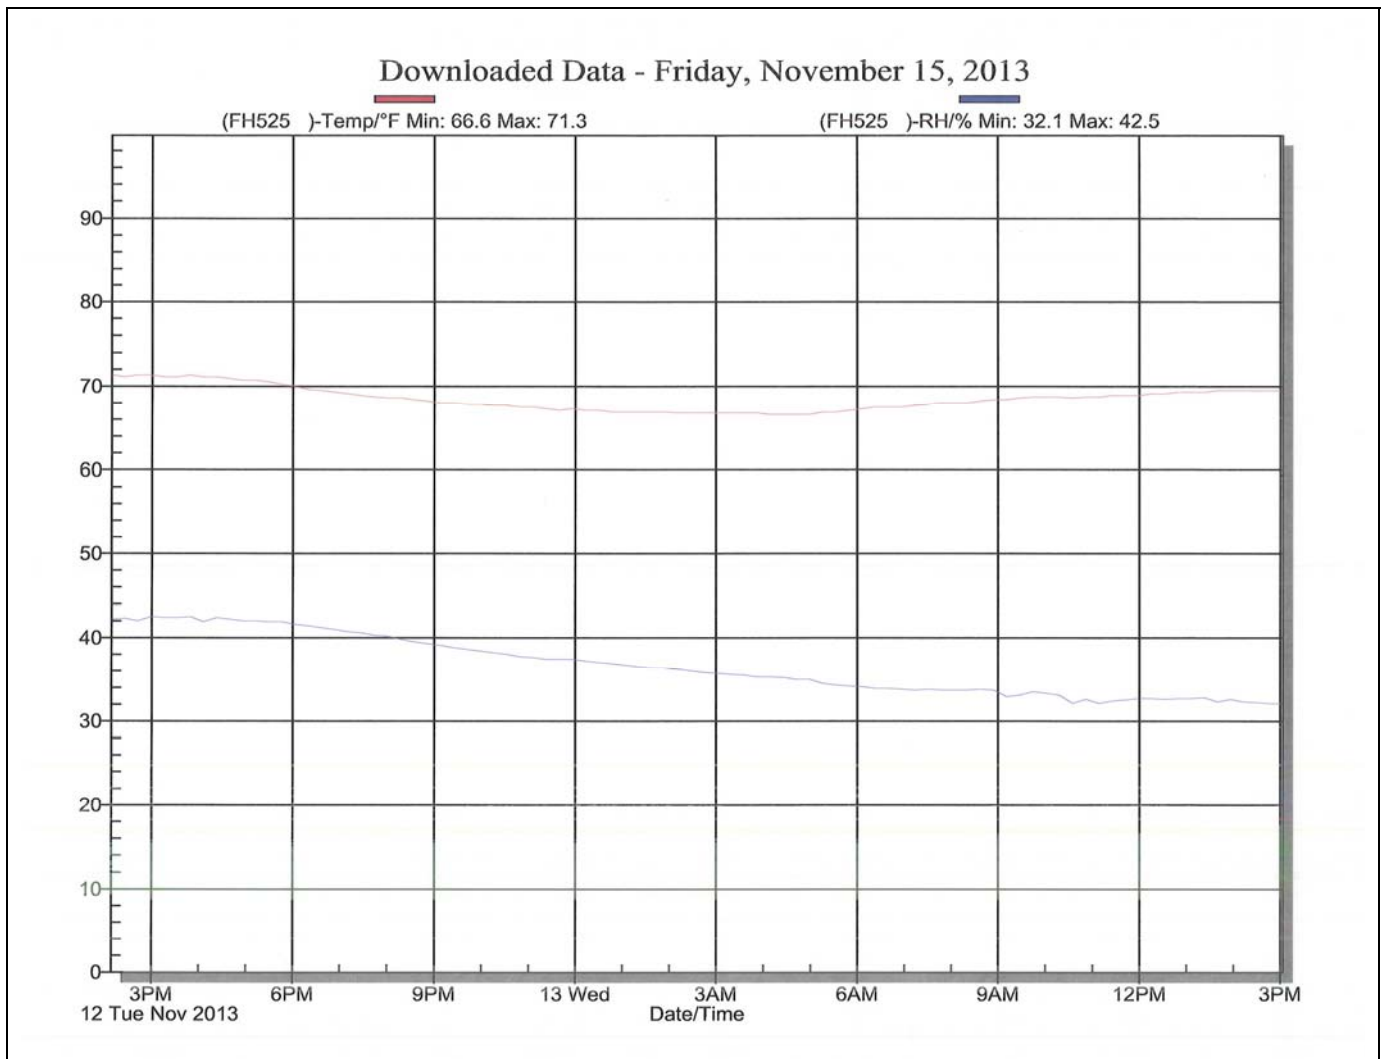

Test Vehicle: 2014 Jeep Patriot 5-Dr. SUV
Test Program: SINCAP

NHTSA Number: M20140308
Test Date: November 13, 2013

**APPENDIX A
PHOTOGRAPHS**

LIST OF PHOTOGRAPHS

Figure	Photograph Description	Page
No. 001	As-Delivered Right Front ¾ View of Test Vehicle	A-5
No. 002	As-Delivered Left Rear ¾ View of Test Vehicle	A-5
No. 003	Pre-Test Frontal View of Test Vehicle	A-6
No. 004	Post-Test Frontal View of Test Vehicle	A-6
No. 005	Pre-Test Left Front ¾ View of Test Vehicle	A-7
No. 006	Post-Test Left Front ¾ View of Test Vehicle	A-7
No. 007	Pre-Test Left Side View of Test Vehicle	A-8
No. 008	Post-Test Left Side View of Test Vehicle	A-8
No. 009	Pre-Test Left Rear ¾ View of Test Vehicle	A-9
No. 010	Post-Test Left Rear ¾ View of Test Vehicle	A-9
No. 011	Pre-Test Rear View of Test Vehicle	A-10
No. 012	Post-Test Rear View of Test Vehicle	A-10
No. 013	Pre-Test Right Side View of Test Vehicle	A-11
No. 014	Post-Test Right Side View of Test Vehicle	A-11
No. 015	Pre-Test Overhead View of Test Area	A-12
No. 016	Post-Test Overhead View of Test Area	A-12
No. 017	Pre-Test Left Side View of MDB Positioned Against Side of Test Vehicle	A-13
No. 018	Pre-Test Right Side View of MDB Positioned Against Side of Test Vehicle	A-13
No. 019	Pre-Test Close-Up View of Impact Point Target	A-14
No. 020	Post-Test Close-Up View of Impact Point Target	A-14
No. 021	Pre-Test Left Front Door Latch Close-Up	A-15
No. 022	Post-Test Left Front Door Latch Close-Up	A-15
No. 023	Pre-Test Left Rear Door Latch Close-Up	A-16
No. 024	Post-Test Left Rear Door Latch Close-Up	A-16
No. 025	Pre-Test Front Close-Up View of Driver Dummy	A-17
No. 026	Post-Test Front Close-Up View of Driver Dummy	A-17
No. 027	Pre-Test Left Side View of Driver Dummy Showing Belt and Chalking	A-18
No. 028	Pre-Test Left Side View of Driver Dummy Shoulder and Door Top View	A-18
No. 029	Post-Test Left Side View of Driver Dummy Shoulder and Door Top View	A-19
No. 030	Pre-Test Frontal View of Driver Seat Back Prior to Dummy Positioning	A-19
No. 031	Pre-Test Frontal View of Driver Dummy Head and Shoulders in Relation to Head Restraint	A-20
No. 032	Pre-Test Frontal View of Driver Seat Pan Prior to Dummy Positioning	A-20
No. 033	Pre-Test Overhead View of Driver Dummy Thighs on Seat Pan	A-21
No. 034	Pre-Test Placement of Driver Dummy's Feet	A-21
No. 035	Pre-Test View of Belt Anchorage for Driver Dummy	A-22
No. 036	Pre-Test Left Side View of Steering Wheel	A-22
No. 037	View of Disengaged Parking Brake	A-23
No. 038	Pre-Test View of Parking Brake	A-23
No. 039	Pre-Test Close-Up Left Side View of Driver Seat Track	A-24
No. 040	Pre-Test Close-Up Left Side View of Driver Seat Back	A-24
No. 041	Pre-Test Close-Up View of Driver Seat Back or Head Restraint	A-25
No. 042	Pre-Test Driver Dummy and Door Clearance View	A-25
No. 043	Post-Test Driver Dummy and Door Clearance View	A-26
No. 044	Pre-Test Right Side View of Driver Dummy and Front Seat Occupant Compartment	A-26
No. 045	Post-Test Right Side View of Driver Dummy and Front Seat Occupant Compartment	A-27
No. 046	Pre-Test Driver Inner Door Panel View	A-27
No. 047	Post-Test Driver Inner Door Panel View Showing Driver Dummy Contact Locations	A-28
No. 048	Post-Test Driver Dummy Close-Up Head Contact with Vehicle View	A-28
No. 049	Post-Test Driver Dummy Close-Up Head Contact with Side Airbag View	A-29
No. 050	Post-Test Driver Dummy Close-Up Torso Contact with Vehicle Interior View	A-29
No. 051	Post-Test Driver Dummy Close-Up Torso Contact with Side Airbag View	A-30
No. 052	Post-Test Driver Dummy Close-Up Pelvis Contact View	A-30
No. 053	Post-Test Driver Dummy Close-Up Pelvis Contact with Side Airbag View	A-31

Figure	Photograph Description	Page
No. 055	Pre-Test Left Side View of Rear Passenger Dummy Showing Belt and Chalking	A-32
No. 056	Pre-Test Left Side View of Passenger Dummy Shoulder and Door Top View	A-32
No. 057	Post-Test Left Side View of Passenger Dummy Shoulder and Door Top View	A-33
No. 058	Pre-Test Frontal View of Rear Passenger Seat Back Prior to Dummy Positioning	A-33
No. 059	Pre-Test Frontal View of Rear Passenger Dummy Head and Shoulders in Relation to Head Restraint	A-34
No. 060	Pre-Test Overhead View of Rear Passenger Seat Pan Prior to Dummy Positioning	A-34
No. 061	Pre-Test Overhead View of Rear Passenger Dummy Thighs on Seat Pan	A-35
No. 062	Pre-Test View of Rear Passenger Dummy's Neck Showing Position of Adjustable Neck Bracket	A-35
No. 063	Pre-Test View of Rear Passenger Dummy's Head Showing Dummy's Head is Level	A-36
No. 064	Pre-test Placement of Rear Passenger Dummy's Feet	A-36
No. 065	Pre-Test View of Belt Anchorage for Rear Passenger Dummy	A-37
No. 066	Pre-Test Close-Up Left Side View of Rear Passenger Seat Track	A-37
No. 067	Pre-Test Close-Up Left Side View of Rear Passenger Seat Back	A-38
No. 068	Pre-Test Close-Up View of Rear Passenger Seat Back or Head Restraint	A-38
No. 074	Post-Test Rear Passenger Inner Door Panel View Showing Rear Passenger Dummy Contact Locations	A-41
No. 075	Post-Test Rear Passenger Dummy Close-Up Head Contact with Vehicle View	A-42
No. 076	Post-Test Rear Passenger Dummy Close-Up Head Contact with Side Airbag View	A-42
No. 077	Post-Test Rear Passenger Dummy Close-Up Torso Contact with Vehicle Interior View	A-43
No. 078	Post-Test Rear Passenger Dummy Close-Up Torso Contact with Side Airbag View	A-43
No. 079	Post-Test Rear Passenger Dummy Close-Up Pelvis Contact View	A-44
No. 080	Post-Test Rear Passenger Dummy Close-Up Pelvis Contact with Side Airbag View	A-44
No. 081	Post-Test Rear Passenger Dummy Close-Up Knee Contact View	A-45
No. 082	Pre-Test View of Fuel Filler Cap or Fuel Filler Neck	A-45
No. 083	Post-Test View of Fuel Filler Cap or Fuel Filler Neck	A-46
No. 084	Pre-Test Front View of MDB Impactor Face	A-46
No. 085	Post-Test Front View of MDB Impactor Face	A-47
No. 086	Pre-Test Top View of MDB Impactor Face	A-47
No. 087	Post-Test Top View of MDB Impactor Face	A-48
No. 088	Pre-Test Left Side View of MDB Impactor Face	A-48
No. 089	Post-Test Left Side View of MDB Impactor Face	A-49
No. 090	Pre-Test Right Side View of MDB Impactor Face	A-49
No. 091	Post-Test Right Side View of MDB Impactor Face	A-50
No. 092	Close-Up View of Vehicle's Certification Label	A-50
No. 093	Close-Up View of Vehicle's Tire Information Placard or Label	A-51
No. 094	Pre-Test Ballast View	A-51
No. 095	Post-Test Primary and Redundant Speed Trap Read-Out	A-52
No. 096	FMVSS No. 301 Static Rollover 0°	A-52
No. 097	FMVSS No. 301 Static Rollover 90°	A-53
No. 098	FMVSS No. 301 Static Rollover 180°	A-53
No. 099	FMVSS No. 301 Static Rollover 270°	A-54
No. 100	FMVSS No. 301 Static Rollover 360°	A-54
No. 101	Impact Event	A-55
No. 102	Monroney Label	A-55
No. 103	Driver Head Restraint Use and Adjustment Information from Vehicle Owner's Manual	A-56
No. 104	Left Rear Passenger Head Restraint Use and Adjustment Information from Vehicle Owner's Manual	A-56



Figure A-1: As-Delivered Right Front 3-4 View of Test Vehicle



Figure A-2: As-Delivered Left Rear 3-4 View of Test Vehicle



M20140308

Figure A-3: Pre-Test Frontal View of the Test Vehicle



M20140308

Figure A-4: Post-Test Frontal View of Test Vehicle



M20140308

Figure A-5: Pre-Test Left Front 3-4 View of Test Vehicle



M20140308

Figure A-6: Post-Test Left Front 3-4 View of Test Vehicle



M20140308

Figure A-7: Pre-Test Left Side View of Test Vehicle



M20140308

Figure A-8: Post-Test Left Side View of Test Vehicle



M20140308

Figure A-9: Pre-Test Left Rear 3-4 View of Test Vehicle



M20140308

Figure A-10: Post-Test Left Rear 3-4 View of Test Vehicle



Figure A-11: Pre-Test Rear View of Test Vehicle



Figure A-12: Post-Test Rear View of Test Vehicle



M20140308

Figure A-13: Pre-Test Right Side View of Test Vehicle



M20140308

Figure A-14: Post-Test Right Side View of Test Vehicle



Figure A-15: Pre-Test Overhead View of Test Area



Figure A-16: Post-Test Overhead View of Test Area



Figure A-17: Pre-Test Left Side View of MDB Positioned Against Side of Test Vehicle



Figure A-18: Pre-Test Right Side View of MDB Positioned Against Side of Test Vehicle



Figure A-19: Pre-Test Close-Up View of Impact Point Target



Figure A-20: Post-Test Close-Up View of Impact Point Target



Figure A-21: Pre-Test Left Front Door Latch Close-Up



Figure A-22: Post-Test Left Front Door Latch Close-Up



Figure A-23: Pre-Test Left Rear Door Latch Close-Up



Figure A-24: Post-Test Left Rear Door Latch Close-Up



Figure A-25: Pre-Test Front Close-Up View of Driver Dummy



Figure A-26: Post-Test Front Close-Up View of Driver Dummy



Figure A-27: Pre-Test Left Side View of Driver Dummy Showing Belt and Chalking



Figure A-28: Pre-Test Left Side View of Driver Dummy Shoulder and Door Top View



Figure A-29: Post-Test Left Side View of Driver Dummy Shoulder and Door Top View



Figure A-30: Pre-Test Frontal View of Driver Seat Back Prior to Dummy Positioning



M20140308

Figure A-31: Pre-Test Frontal View of Driver Dummy Head and Shoulders in Relation to Head Restraint



M20140308

Figure A-32: Pre-Test Frontal View of Driver Seat Pan Prior to Dummy Positioning



Figure A-33: Pre-Test Overhead View of Driver Dummy Thighs on Seat Pan

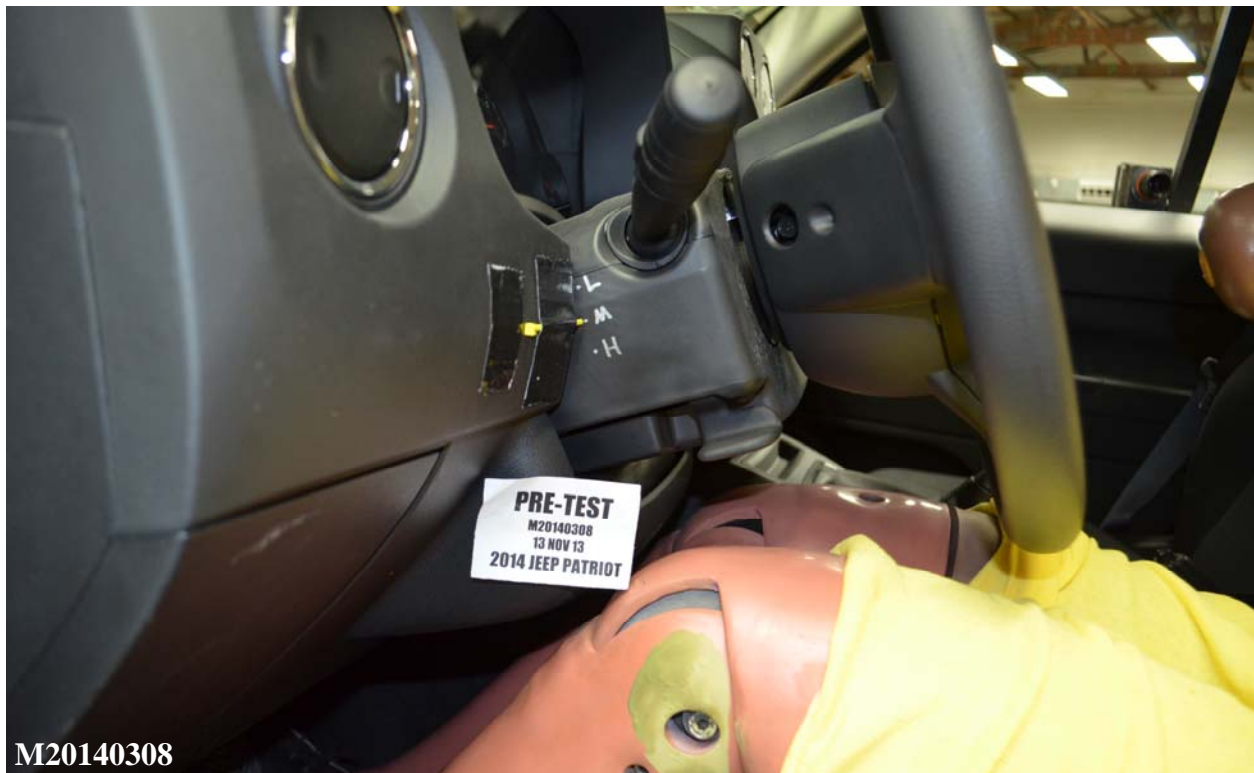


Figure A-34: Pre-Test Placement of Driver Dummy's Feet



M20140308

Figure A-35: Pre-Test View of Belt Anchorage for Driver Dummy



M20140308

Figure A-36: Pre-Test Left Side View of Steering Wheel



Figure A-37: View of Disengaged Parking Brake



Figure A-38: Pre-Test View of Parking Brake



Figure A-39: Pre-Test Close-Up Left Side View of Driver Seat Track



Figure A-40: Pre-Test Close-Up Left Side View of Driver Seat Back

Not Taken

M20140308

Figure A-41: Pre-Test Close-Up View of Driver Seat Back or Head Restraint



Figure A-42: Pre-Test Driver Dummy and Door Clearance View



Figure A-43: Post-Test Driver Dummy and Door Clearance View



Figure A-44: Pre-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment



Figure A-45: Post-Test Right Side View of Driver Dummy and Front Seat Occupant Compartment



Figure A-46: Pre-Test Driver Inner Door Panel View



Figure A-47: Post-Test Driver Inner Door Panel View Showing Driver Dummy Contact Locations



Figure A-48: Post-Test Driver Dummy Close-Up Head Contact With Vehicle Interior View



Figure A-49: Post-Test Driver Dummy Close-Up Head Contact with Side Airbag View

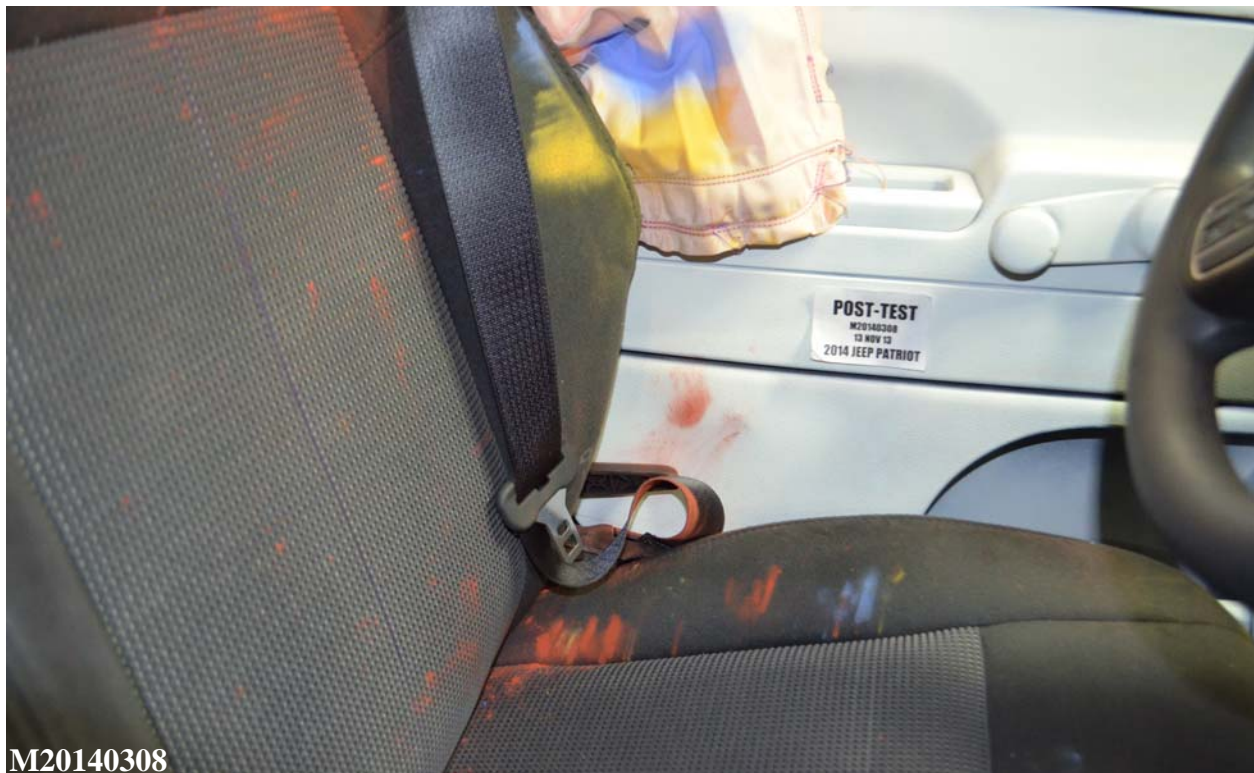


Figure A-50: Post-Test Driver Dummy Close-Up Torso Contact with Vehicle Interior View



M20140308

Figure A-51: Post-Test Driver Dummy Close-Up Torso Contact with Side Air Bag View



M20140308

Figure A-52: Post-Test Driver Dummy Close-Up Pelvis Contact With Vehicle Interior View

Not Applicable

M20140308

Figure A-53: Post-Test Driver Dummy Close-Up Pelvis Contact with Side Airbag View



M20140308

Figure A-54: Post-Test Driver Dummy Close-Up Knee Contact View



Figure A-55: Pre-Test Left Side View of Rear Passenger Dummy Showing Belt and Chalking



Figure A-56: Pre-Test Left Side View of Rear Passenger Dummy Shoulder and Door Top View



Figure A-57: Post-Test Left Side View of Rear Passenger Dummy Shoulder and Door Top View



Figure A-58: Pre-Test Frontal View of Rear Passenger Seat Back Prior to Dummy Positioning



Figure A-59 - Pre-Test Frontal View of Rear Passenger Dummy Head and Shoulders in Relation to Head Restraint



Figure A-60: Pre-Test Overhead View of Rear Passenger Seat Pan Prior to Dummy Positioning



M20140308

Figure A-61: Pre-Test Overhead View of Rear Passenger Dummy Thighs on Seat Pan



M20140308

Figure A-62: Pre-Test View of Rear Passenger Dummy's Neck Showing Position of Adjustable Neck Bracket



Figure A-63: Pre-Test View of Rear Passenger Dummy's Head Showing Dummy's Head is Level



Figure A-64: Pre-Test Placement of Rear Passenger Dummy's Feet



Figure A-65: Pre-Test View of Belt Anchorage for Rear Passenger Dummy



Figure A-66: Pre-Test Close-Up Left Side View of Rear Passenger Seat Track



M20140308

Figure A-67: Pre-Test Close-Up Left Side View of Rear Passenger Seat Back



M20140308

Figure A-68: Pre-Test Close-Up View of Rear Passenger Seat Back or Head Restraint



Figure A-69: Pre-Test Rear Passenger Dummy and Door Clearance View



Figure A-70: Post-Test Rear Passenger Dummy and Door Clearance View



M20140308

Figure A-71: Pre-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment



M20140308

Figure A-72: Post-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment



Figure A-73: Pre-Test Rear Passenger Inner Door Panel View



Figure A-74: Post-Test Rear Passenger Inner Door Panel View Showing Dummy Contact Locations

Not Applicable

M20140308

Figure A-75: Post-Test Rear Passenger Dummy Close-Up Head Contact with Vehicle Interior View



M20140308

Figure A-76: Post-Test Rear Passenger Dummy Close-Up Head Contact with Side Airbag View



Figure A-77: Post-Test Rear Passenger Dummy Close-Up Torso Contact with Vehicle Interior View

Not Applicable

M20140308

Figure A-78: Post-Test Rear Passenger Dummy Close-Up Torso Contact with Side Airbag View



Figure A-79: Post-Test Rear Passenger Dummy Close-Up Pelvis Contact with Vehicle Interior View

Not Applicable


M20140308

Figure A-80: Post-Test Rear Passenger Dummy Close-Up Pelvis Contact with Side Airbag View



M20140308

Figure A-81: Post-Test Rear Passenger Dummy Close-Up Knee Contact View

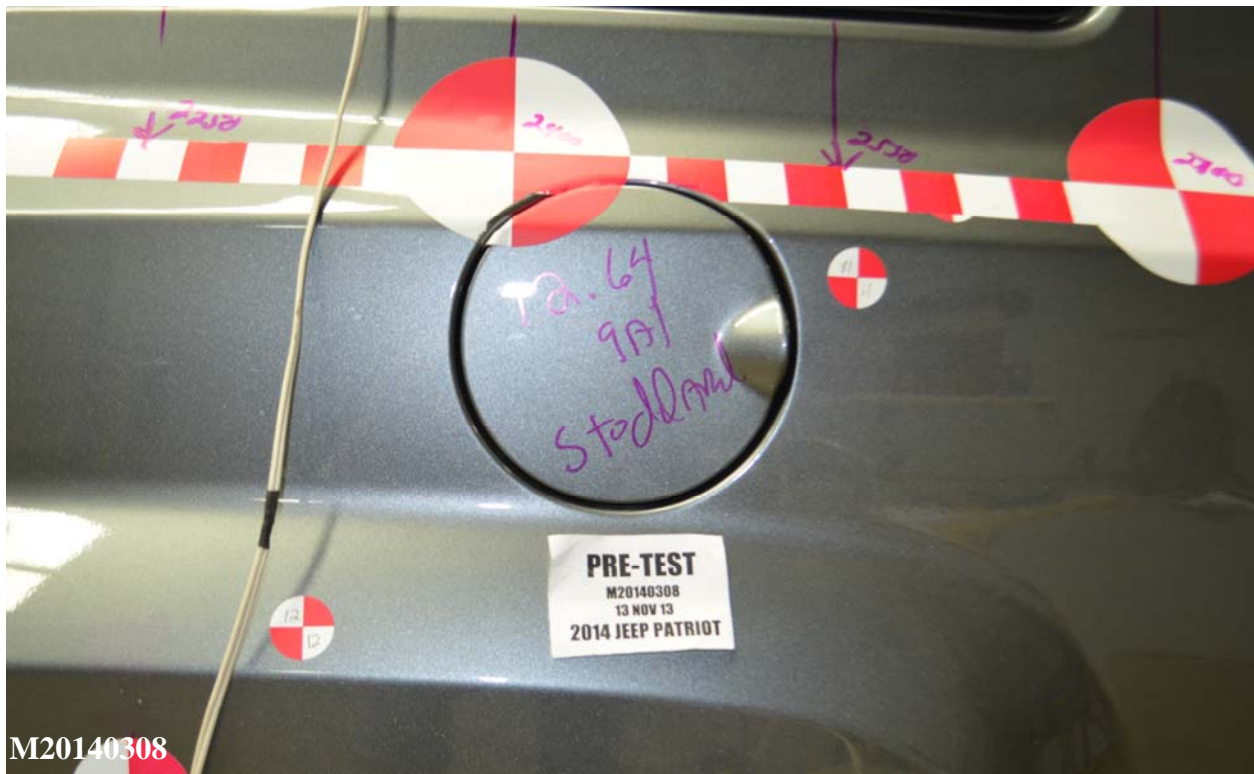


M20140308

Figure A-82: Pre-Test View of Fuel Filler Cap or Fuel Filler Neck



M20140308

Figure A-83: Post-Test View of Fuel Filler Cap or Fuel Filler Neck

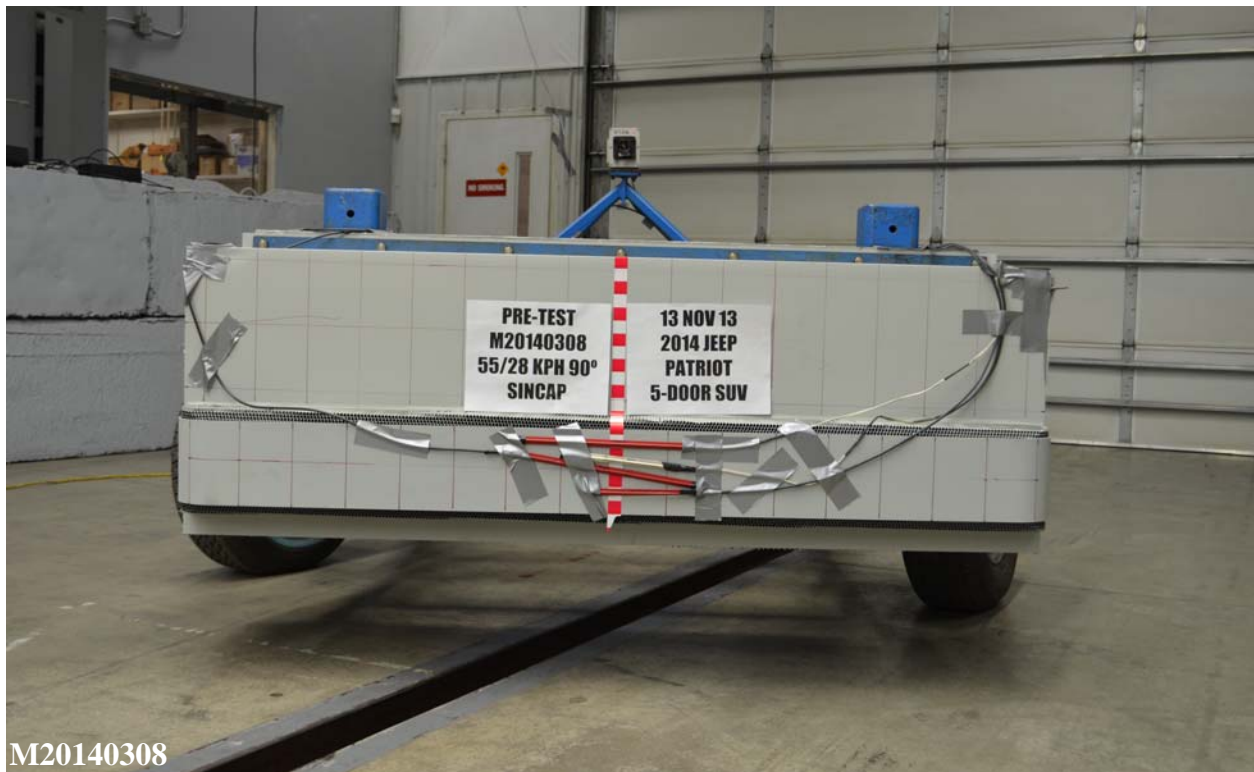

M20140308

Figure A-84: Pre-Test Front View of MDB Impactor Face



Figure A-85: Post-Test Front View of MDB Impactor Face



Figure A-86: Pre-Test Top View of MDB Impactor Face



M20140308

Figure A-87: Post-Test Top View of MDB Impactor Face



M20140308

Figure A-88: Pre-Test Left Side View of MDB Impactor Face



M20140308

Figure A-89: Post-Test Left Side View of MDB Impactor Face



M20140308

Figure A-90: Pre-Test Right Side View of MDB Impactor Face



M20140308

Figure A-91: Post-Test Right Side View of MDB Impactor Face



M20140308

Figure A-92: Close-Up View of Vehicle's Certification Label



M20140308

Figure A-93: Close-Up View of Vehicle's Tire Information Placard or Label



M20140308


Figure A-94: Pre-Test Ballast View



Figure A-95: Post-Test Primary and Redundant Speed Trap Read-Out



Figure A-96: FMVSS No. 301 Static Rollover 0 Degrees

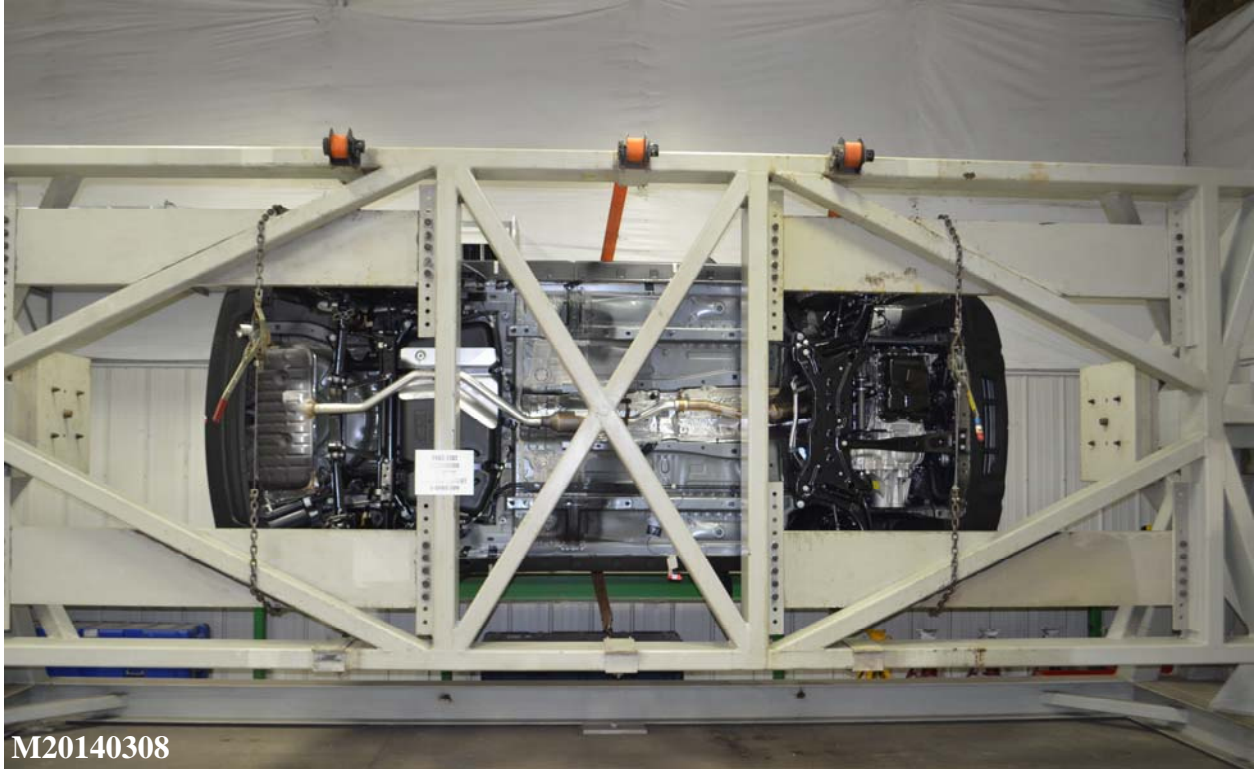

M20140308

Figure A-97: FMVSS No. 301 Static Rollover 90 Degrees



M20140308

Figure A-98: FMVSS No. 301 Static Rollover 180 Degrees



M20140308

Figure A-99: FMVSS No. 301 Static Rollover 270 Degrees



M20140308

Figure A-100: FMVSS No. 301 Static Rollover 360 Degrees



M20140308

Figure A-101: Impact Event

Jeep 2014 MODEL YEAR **PATRIOT SPORT FWD**

THIS VEHICLE IS MANUFACTURED TO MEET SPECIFIC UNITED STATES REQUIREMENTS. THIS VEHICLE IS NOT MANUFACTURED FOR SALE OR REGISTRATION OUTSIDE OF THE UNITED STATES.

MANUFACTURER'S SUGGESTED RETAIL PRICE OF THIS MODEL INCLUDING DEALER PREPARATION
 Base Price: **\$15,995**

JEOP PATRIOT SPORT FWD
 Exterior Color: Mineral Gray Metallic Clay Coat Exterior Paint
 Interior Color: Dark Slate Gray Trim and Seat Color
 Interior: Premium Cloth Bucket Seats
 Engine: 2.0-Liter I4 DOHC, 16-Valve Dual VVT Engine
 Transmission: 5-Speed Manual Transmission

STANDARD EQUIPMENT (UNLESS REPLACED BY OPTIONAL EQUIPMENT)
 FUNCTIONAL/SAFETY FEATURES
 Advanced Multistage Front Airbags
 Supplemental Side-Curtain Front and Rear Airbags
 Supplemental Front Seat-Mounted Side Airbags
 Active Head Restraints
 Electronic Stability Control
 Electronic Roll Mitigation
 Anti-Lock Front Disc / Rear Drum Brakes
 Hill Start Assist
 Brake Assist
 Speed Control
 Sentry Key® Theft Deterrent System
 Interior Removable / Rechargeable Lamp
 Rear Window Defroster
 Rear Window Wiper / Washer
 Tire Pressure Monitor with Warning Lamp
 12-Volt Auxiliary Power Outlet
 Power Accessory Delay
 Height-Adjustable Front Shoulder Belts
 120-Amp Alternator
 525-Amp Maintenance Free Battery
 INTERIOR FEATURES
 Uconnect® 130 AM/FM/CD/MP3
 Audio Jack Input for Mobile Devices
 4 Speakers
 Full-Length Floor Console
 Tilt Steering Column
 Rear 60 / 40 Folding Seat
 Luxury Front and Rear Floor Mats
 Variable Intermittent Windshield Wipers
 Illuminated Cup Holders
 Map / Dome Reading Lamps

Folding Flat Load Floor Storage
 Instrument Cluster with Tachometer
 Rearview Day / Night Mirror
 Outside Temperature Display in Odometer
 Sliding Sun Viscors with Mirrors
 Sliding Armrest
 Passenger Assist Handles
 EXTERIOR FEATURES
 16-Inch x 6.5-Inch Styled Steel Wheels
 P205/70R16 BSW All Season Tires
 Compact Spare Tire
 Deep Tint Sunscreen Glass
 Halogen Headlamps
 Fog Lamps
 Black Side Roof Rails
 Manual Fold-Away Mirrors
 Body-Color Grille
 Lower Body Side Accent Cladding

OPTIONAL EQUIPMENT
 Customer Preferred Package 28A
 Uconnect® 230 6CD/DVD/MP3 \$425
 DESTINATION CHARGE \$95

TOTAL PRICE: * \$17,415

WARRANTY COVERAGE
 5-year or 100,000-mile Powertrain Limited Warranty,
 3-year or 36,000-mile Basic Limited Warranty,
 5-year or 100,000-mile Roadside Assistance; certain restrictions apply.
 Ask Dealer for a copy of the limited warranties or see your owner's manual for details.

5 YEAR/100,000 MILE POWERTRAIN WARRANTY

Assembly Point/Port of Entry: BELVIDERE, ILLINOIS, U.S.A.
 VIN: 1C4JLPA44ED-659911 L11111 0045

SHIP TO: 44676 33
 VISION DODGE CHEVROLET JEEP
 800 MONROE TRL, SOUTH
 ROCHESTER NY 14620-2300
 800 MONROE TRL, SOUTH
 ROCHESTER NY 14620-2300

THIS LABEL IS ADDED TO THIS VEHICLE TO COMPLY WITH FEDERAL LAW. THE LABEL CANNOT BE REMOVED OR ALTERED PRIOR TO DELIVERY TO THE ULTIMATE PURCHASER.
 * EXcludes freight, taxes, title, license and dealer supplied and installed options and accessories and is not included in this price. DISCOUNT, IF ANY, IS BASED ON PRICE OF OPTION AS PRICED ON SOFTWARE.

M20140308

For more information visit: www.jeep.com or call 1-877-IAM-JEEP Chrysler Group LLC

EPA DOT Fuel Economy and Environment Gasoline Vehicle

Fuel Economy
26 MPG combined city/hwy
 23 city 30 highway
 3.8 gallons per 100 miles

Small SUV 2WD range from 16 to 30 MPG. The best vehicle rates 121 MPG.

You save \$1,500 in fuel costs over 5 years compared to the average new vehicle.

Annual fuel Cost \$2,000

Fuel Economy & Greenhouse Gas Rating (multiple entry) Smog Rating (multiple entry)

This vehicle emits 346 grams CO2 per mile. The best emits 0 grams per mile (tailpipe only). Producing and distributing fuel also creates emissions. Learn more at fuelconomy.gov

fuelconomy.gov
 Calculate personalized estimates and compare vehicles.

Smartphone QR Code

GOVERNMENT 5-STAR SAFETY RATINGS

Overall Vehicle Score Not Rated
 Based on the combined ratings of frontal, side, and rollover. Should ONLY be compared to other vehicles of similar size and weight.

Frontal Crash	Driver Passenger	★★★★
Side Crash	Front seat Rear seat	Not Rated Not Rated
Rollover		★★★

Star ratings range from 1 to 5 stars (***** with 5 being the highest).
 Source: National Highway Traffic Safety Administration (NHTSA)
www.safercar.gov or 1-888-327-4236

The safety ratings above are based on Federal Government tests of particular vehicles equipped with certain features and options. The performance of this vehicle may differ.


PARTS CONTENT INFORMATION
 FOR VEHICLES IN THIS CARLINE:
 U.S./CANADIAN PARTS CONTENT: 72 %
 NOTE: PARTS CONTENT DOES NOT INCLUDE FINAL ASSEMBLY, DISTRIBUTION, OR OTHER NON-PARTS COSTS.
 FOR THIS VEHICLE:
 FINAL ASSEMBLY POINT:
 BELVIDERE, ILLINOIS, U.S.A.
 COUNTRY OF ORIGIN:
 ENGINE: UNITED STATES
 TRANSMISSION: UNITED STATES

Figure A-102: Monroney Label

THINGS TO KNOW BEFORE STARTING YOUR VEHICLE 57

CAUTION!

All occupants, including the driver, should not operate a vehicle or sit in a vehicle's seat until the head restraints are placed in their proper positions in order to minimize the risk of neck injury in the event of a collision.

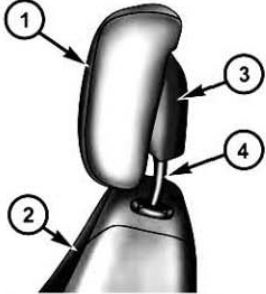

Active Head Restraint (AHR) Components

1 — Head Restraint Front Half (Soft Foam and Trim) 2 — Seatback	3 — Head Restraint Back Half (Decorative Plastic Rear Cover) 4 — Head Restraint Guide Tubes
--------------------------------------------------------------------	------------------------------------------------------------------------------------------------

NOTE: For more information on properly adjusting and positioning the head restraint, refer to "Adjusting Active Head Restraints" in "Understanding The Features Of Your Vehicle".

Resetting Active Head Restraints (AHR)


If the Active Head Restraints are triggered in a collision, you must reset the head restraint on the driver's and front passenger seat. You can recognize when the Active Head Restraint has been triggered by the fact that they have moved forward (as shown in step three of the resetting procedure).

M20140308


Figure A-103: Driver Head Restraint Use and Adjustment Information from Vehicle Owner's Manual

58 THINGS TO KNOW BEFORE STARTING YOUR VEHICLE

1. Grasp the deployed AHR from the rear seat.
2. Position the hands on the top of the deployed AHR at a comfortable position.
3. Pull down then rearward towards the rear of the vehicle then down to engage the locking mechanism.



Hand Positioning Points On AHR

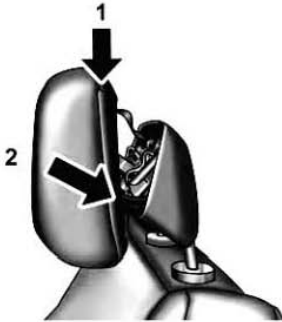

1 — Downward Movement
2 — Rearward Movement

M20140308

Figure A-104: Left Rear Passenger Head Restraint Use and Adjustment Information from Vehicle Owner's Manual

Test Vehicle: 2014 Jeep Patriot 5-Door SUV
Test Program: SINCAP

NHTSA Number: M20140308
Test Date: November 13, 2013

APPENDIX B
DRIVER & PASSENGER DUMMY INSTRUMENTATION PLOTS

The following plots are provided in the test report

Data Plot	Description	Page
1	Driver Head Acceleration (X) Primary vs. Time	B-4
2	Driver Head Acceleration (Y) Primary vs. Time	B-5
3	Driver Head Acceleration (Z) Primary vs. Time	B-6
4	Driver Head Resultant Acceleration Primary vs. Time	B-7
5	Driver Upper Thorax Rib Deflection (Y) vs. Time	B-8
6	Driver Middle Thorax Rib Deflection (Y) vs. Time	B-9
7	Driver Lower Thorax Rib Deflection (Y) vs. Time	B-10
8	Driver Thorax Rib Deflection Maximum vs. Time	B-11
9	Driver Anterior Abdominal Force (Y) vs. Time	B-12
10	Driver Middle Abdominal Force (Y) vs. Time	B-13
11	Driver Posterior Abdominal Force (Y) vs. Time	B-14
12	Driver Total Abdominal Force (Y) vs. Time	B-15
13	Driver Pubic Symphysis Force (Y) vs. Time	B-16
14	Passenger Head Acceleration (X) Primary vs. Time	B-17
15	Passenger Head Acceleration (Y) Primary vs. Time	B-18
16	Passenger Head Acceleration (Z) Primary vs. Time	B-19
17	Passenger Head Resultant Acceleration Primary vs. Time	B-20
18	Passenger Lower Spine T ₁₂ Acceleration (X) vs. Time	B-21
19	Passenger Lower Spine T ₁₂ Acceleration (Y) vs. Time	B-22
20	Passenger Lower Spine T ₁₂ Acceleration (Z) vs. Time	B-23
21	Passenger Lower Spine T ₁₂ Resultant Acceleration vs. Time	B-24
22	Passenger Iliac Force on Impact Side (Y) vs. Time	B-25
23	Passenger Acetabulum Force on Impact Side (Y) vs. Time	B-26
24	Passenger Total Pelvic Force on Impact Side (Y) vs. Time	B-27

The following additional data for this test can be obtained from the Research and Development section of the NHTSA website. The website can be found at www.NHTSA.dot.gov.

Additional Driver & Passenger Dummy Instrumentation Data

-
- Driver Lower Spine T₁₂ Acceleration (X)
 - Driver Lower Spine T₁₂ Acceleration (Y)
 - Driver Lower Spine T₁₂ Acceleration (Z)
 - Passenger Upper Thorax Rib Deflection (Y)
 - Passenger Middle Thorax Rib Deflection (Y)
 - Passenger Lower Thorax Rib Deflection (Y)
 - Passenger Upper Abdomen Rib Deflection (Y)
 - Passenger Lower Abdomen Rib Deflection (Y)
 - Driver Head Acceleration Redundant (X)
 - Driver Head Acceleration Redundant (Y)
 - Driver Head Acceleration Redundant (Z)
 - Passenger Head Acceleration Redundant (X)
 - Passenger Head Acceleration Redundant (Y)
 - Passenger Head Acceleration Redundant (Z)

Vehicle Instrumentation Data

Vehicle Center of Gravity Acceleration (X)
Vehicle Center of Gravity Acceleration (Y)
Vehicle Center of Gravity Acceleration (Z)
Right Side Sill at Front Seat Acceleration (X)
Right Side Sill at Front Seat Acceleration (Y)
Right Side Sill at Front Seat Acceleration (Z)
Right Side Sill at Rear Seat Acceleration (X)
Right Side Sill at Rear Seat Acceleration (Y)
Right Side Sill at Rear Seat Acceleration (Z)
Left Side Sill at Front Seat Acceleration (Y)
Left Side Sill at Rear Seat Acceleration (Y)
Lower A-Post Acceleration (Y)
Middle A-Post Acceleration (Y)
Lower B-Post Acceleration (Y)
Middle B-Post Acceleration (Y)
Front Seat Track Acceleration (Y)
Rear Seat Structure Acceleration (Y)
Right Rear Occupant Compartment Acceleration (Y)
Engine Block (X)
Engine Block (Y)
Rear Floorpan Above Axle Acceleration (X)
Rear Floorpan Above Axle Acceleration (Y)
Rear Floorpan Above Axle Acceleration (Z)

MDB Instrumentation Data


MDB Center of Gravity Acceleration (X)
MDB Center of Gravity Acceleration (Y)
MDB Center of Gravity Acceleration (Z)
MDB Rear Acceleration (X)
MDB Rear Acceleration (Y)
Left MDB Contact Switch
Right MDB Contact Switch

Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC1000
Plot number	001
Units	G'S

Max	3.85	G'S
	20.72	msec
Min	-18.65	G'S
	34.32	msec



Driver Head Acceleration (X) Primary vs. Time

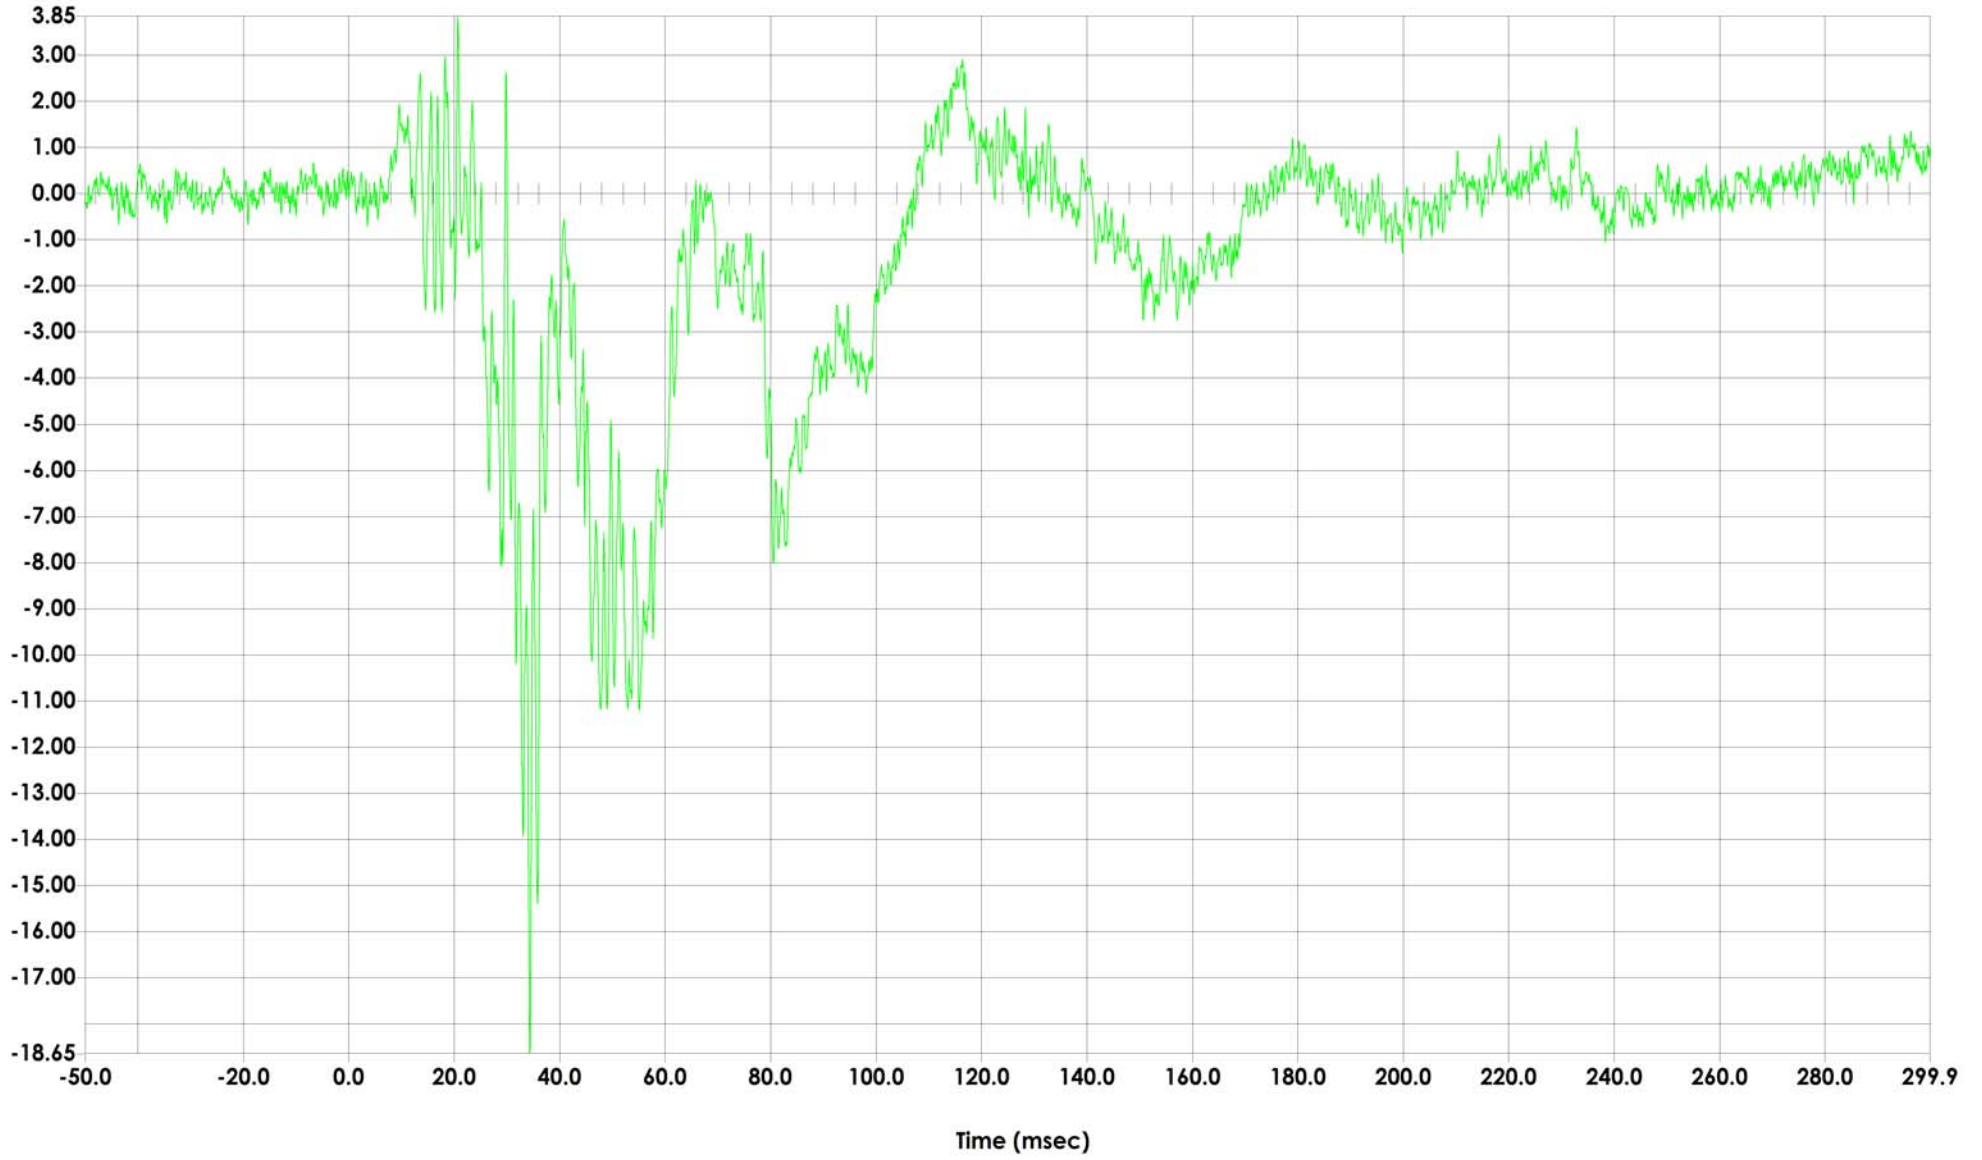


Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC1000
Plot number	002
Units	G'S

Max	22.57	G'S
	33.60	msec
Min	-6.11	G'S
	75.76	msec



Driver Head Acceleration (Y) Primary vs. Time

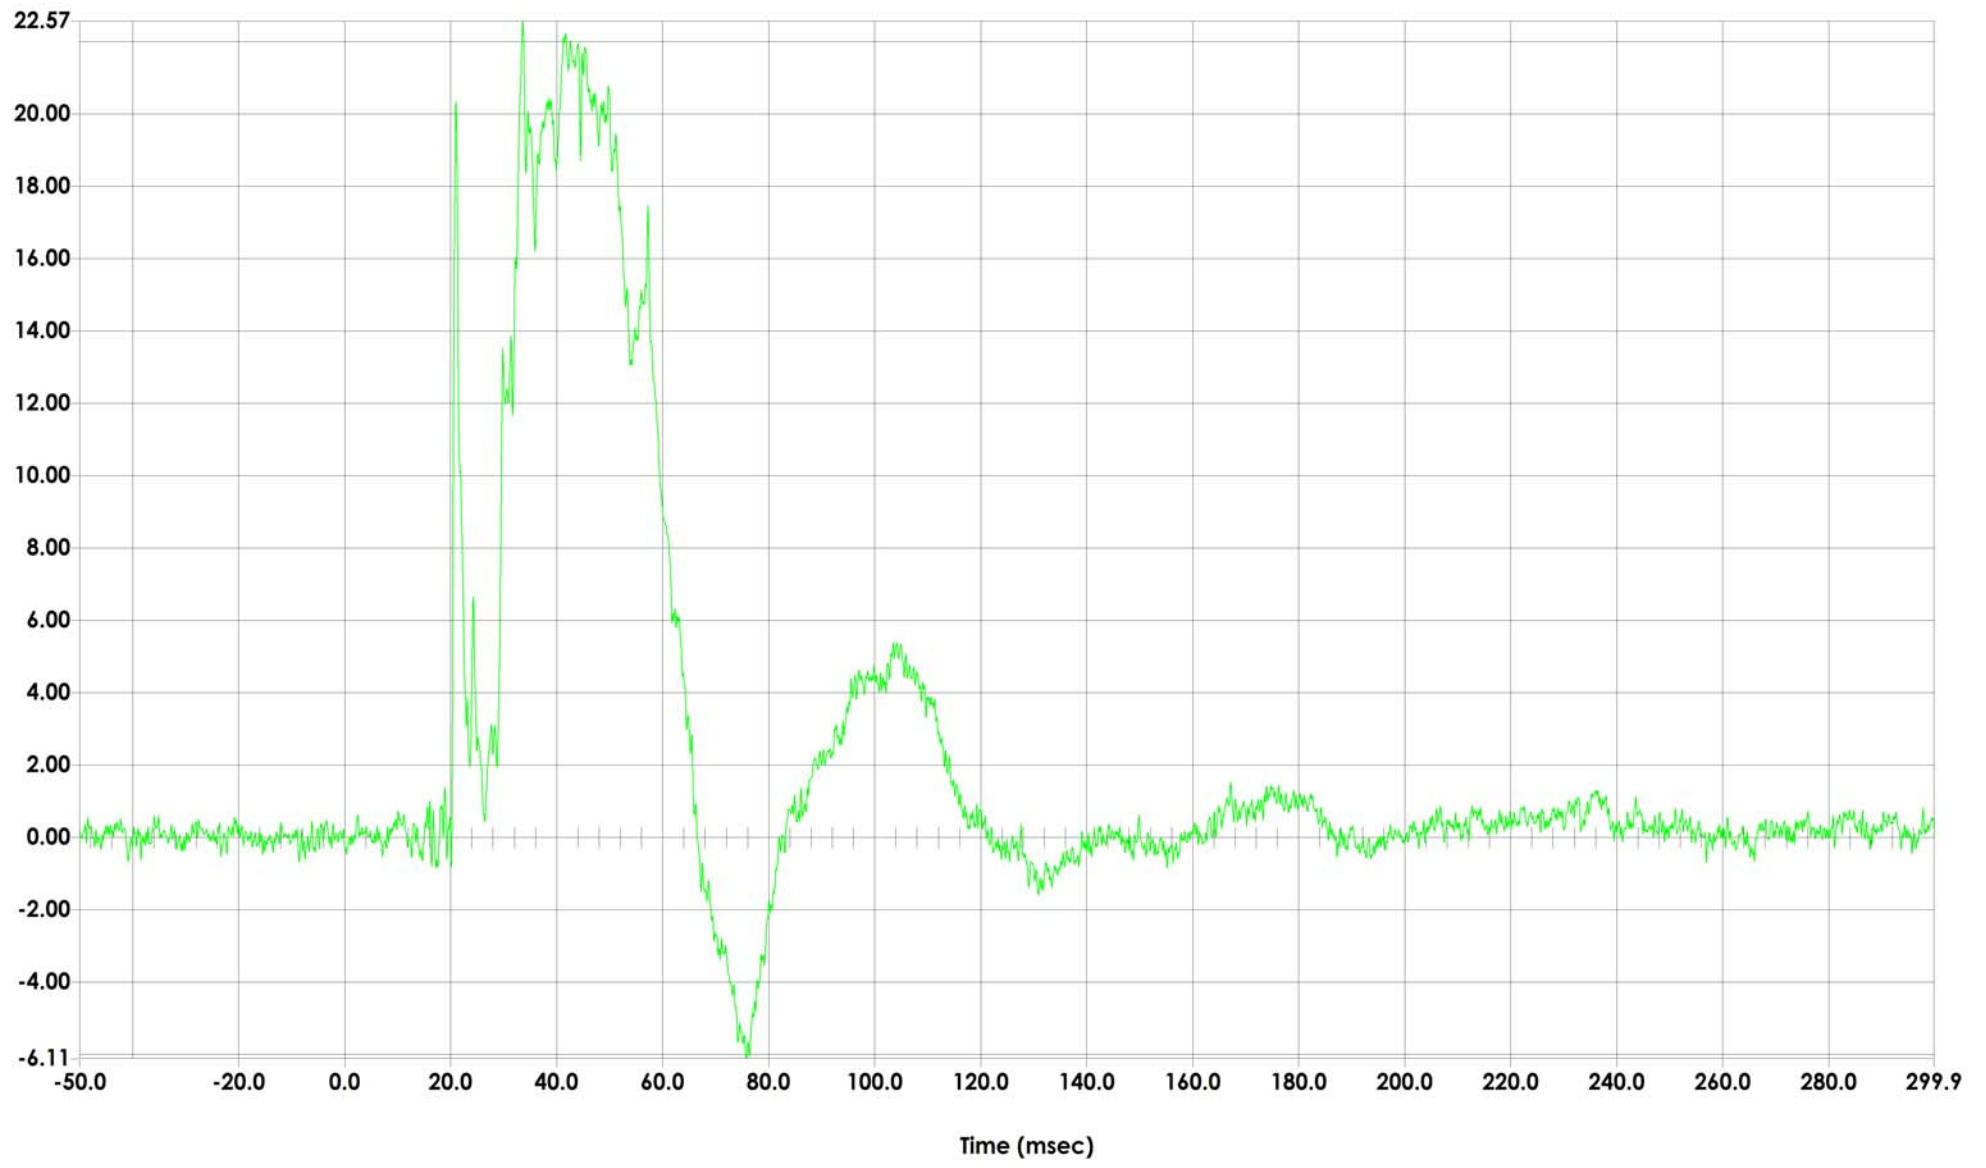


Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC1000
Plot number	003
Units	G'S

Max	14.02	G'S
	58.64	msec
Min	-10.98	G'S
	67.60	msec



Driver Head Acceleration (Z) Primary vs. Time

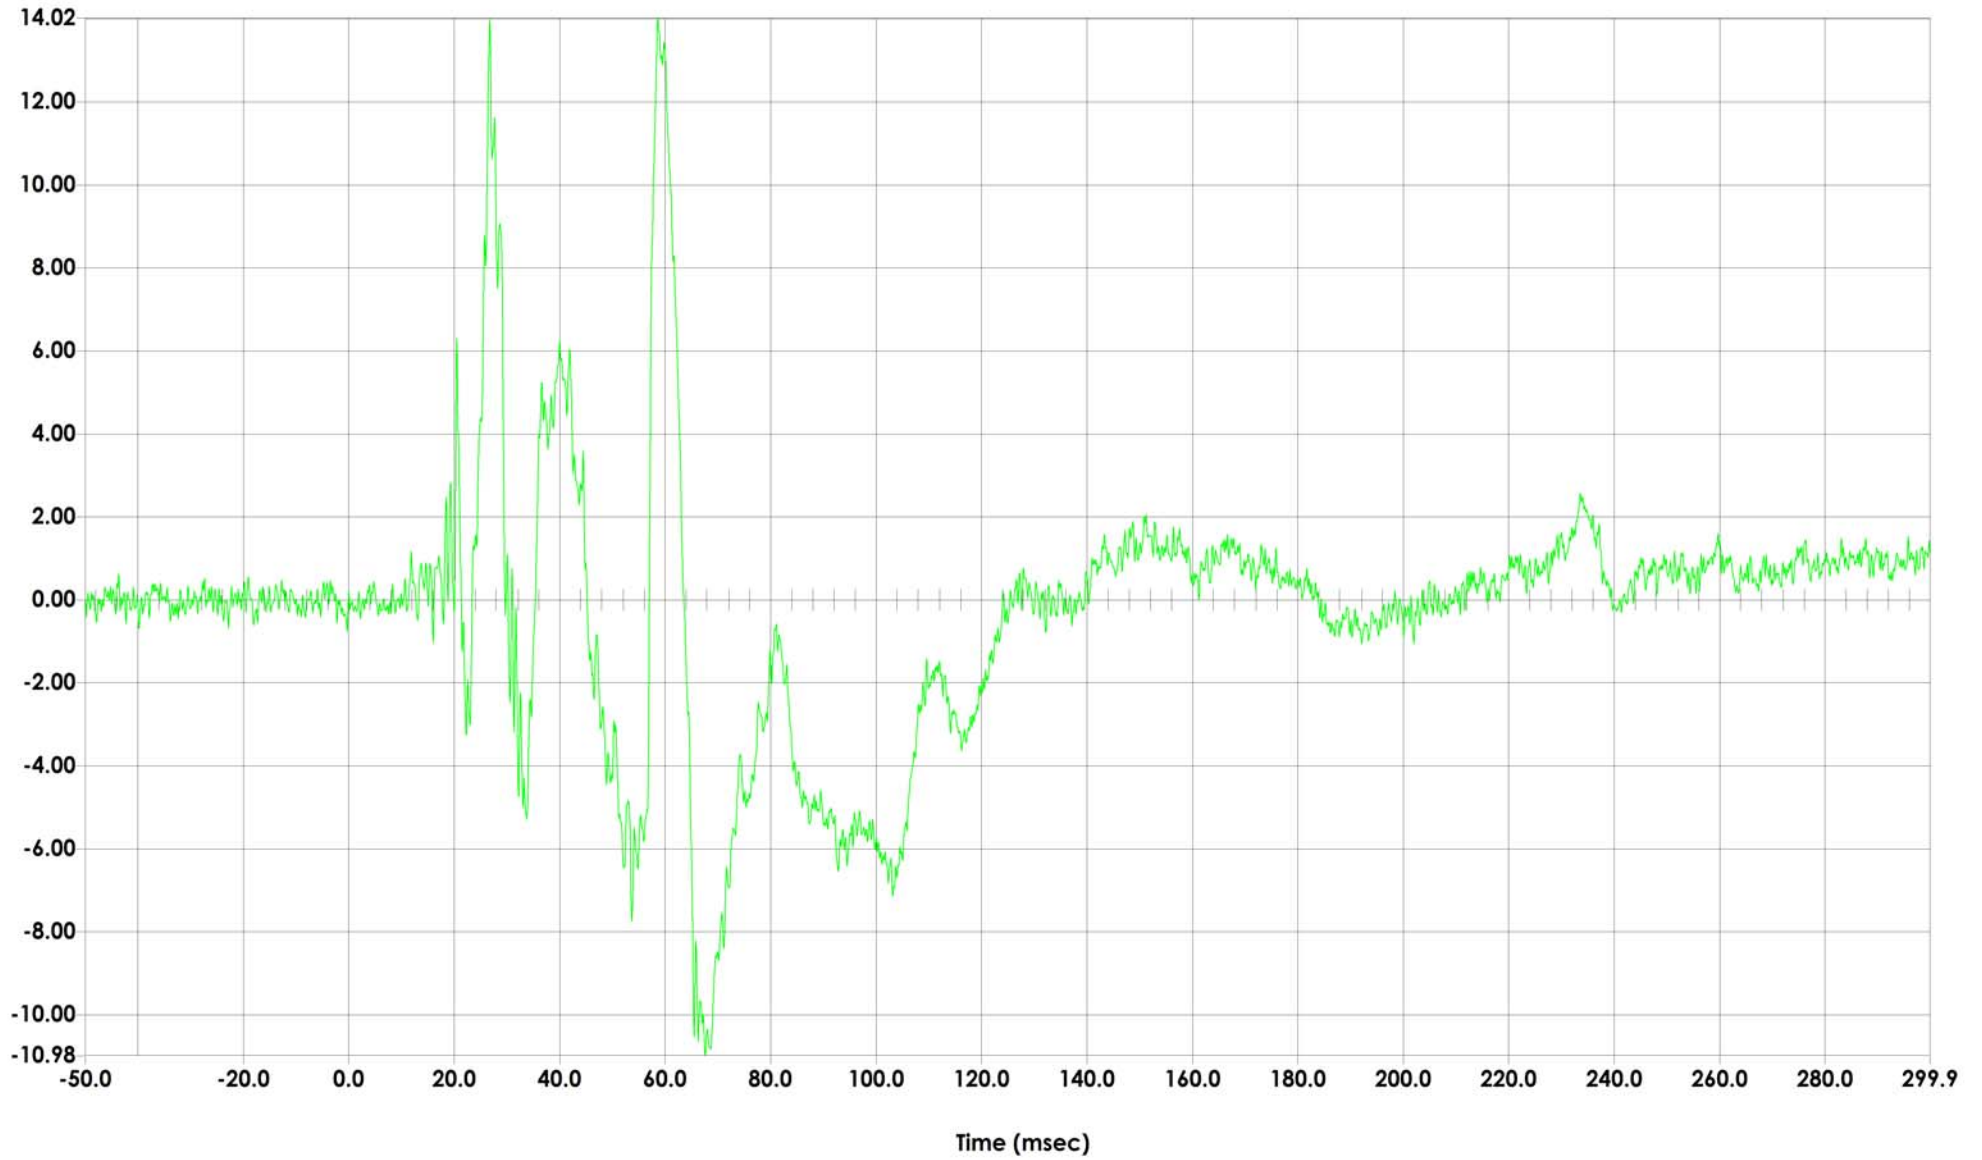


Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC1000
Plot number	056
Units	G'S

Max	26.82	G'S
	34.40	msec
Min	0.03	G'S
	-47.44	msec



Driver Head Resultant Acceleration Primary vs. Time

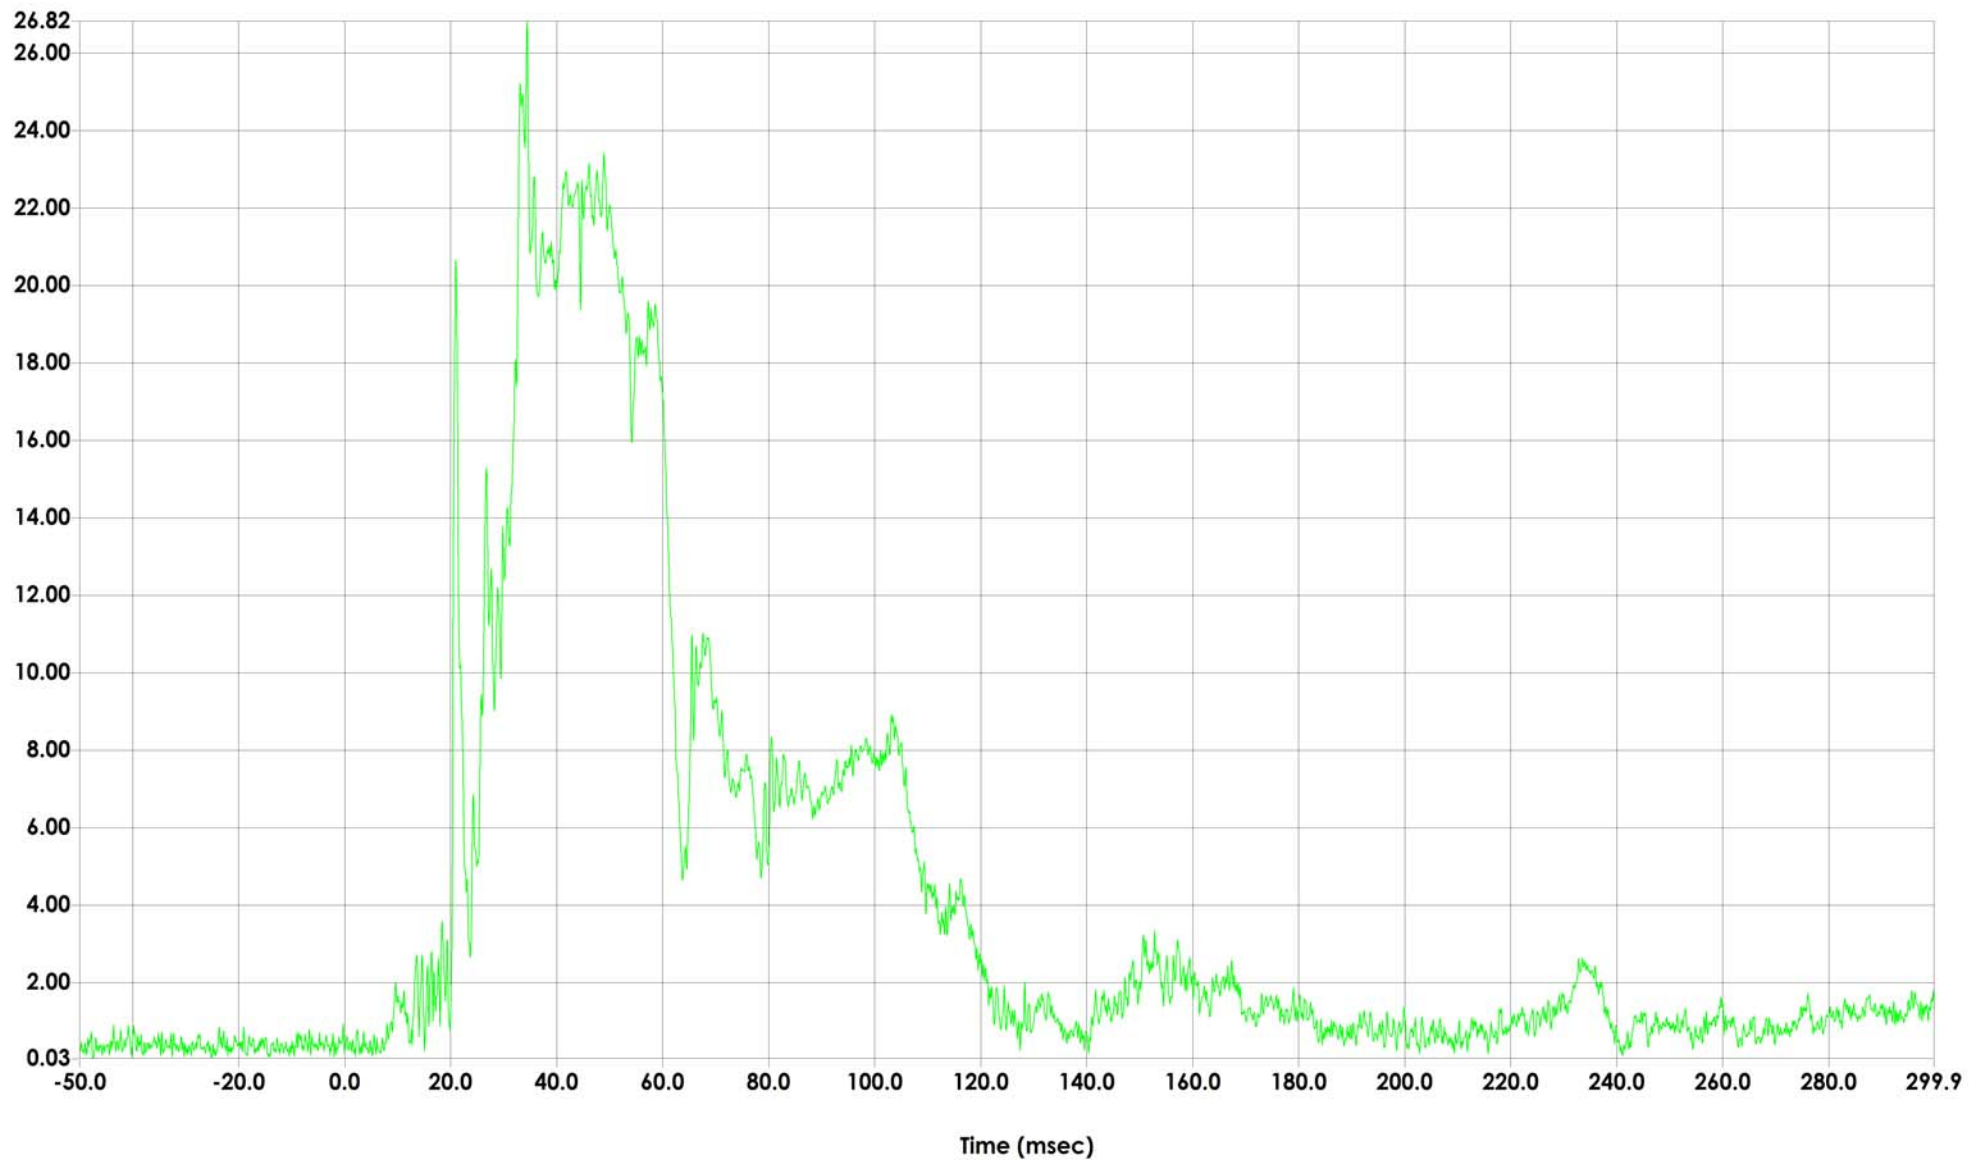


Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC180
Plot number	007
Units	MM

Max	27.85	MM
	46.64	msec
Min	-1.82	MM
	87.12	msec



Driver Upper Thorax Rib Deflection (Y) vs. Time

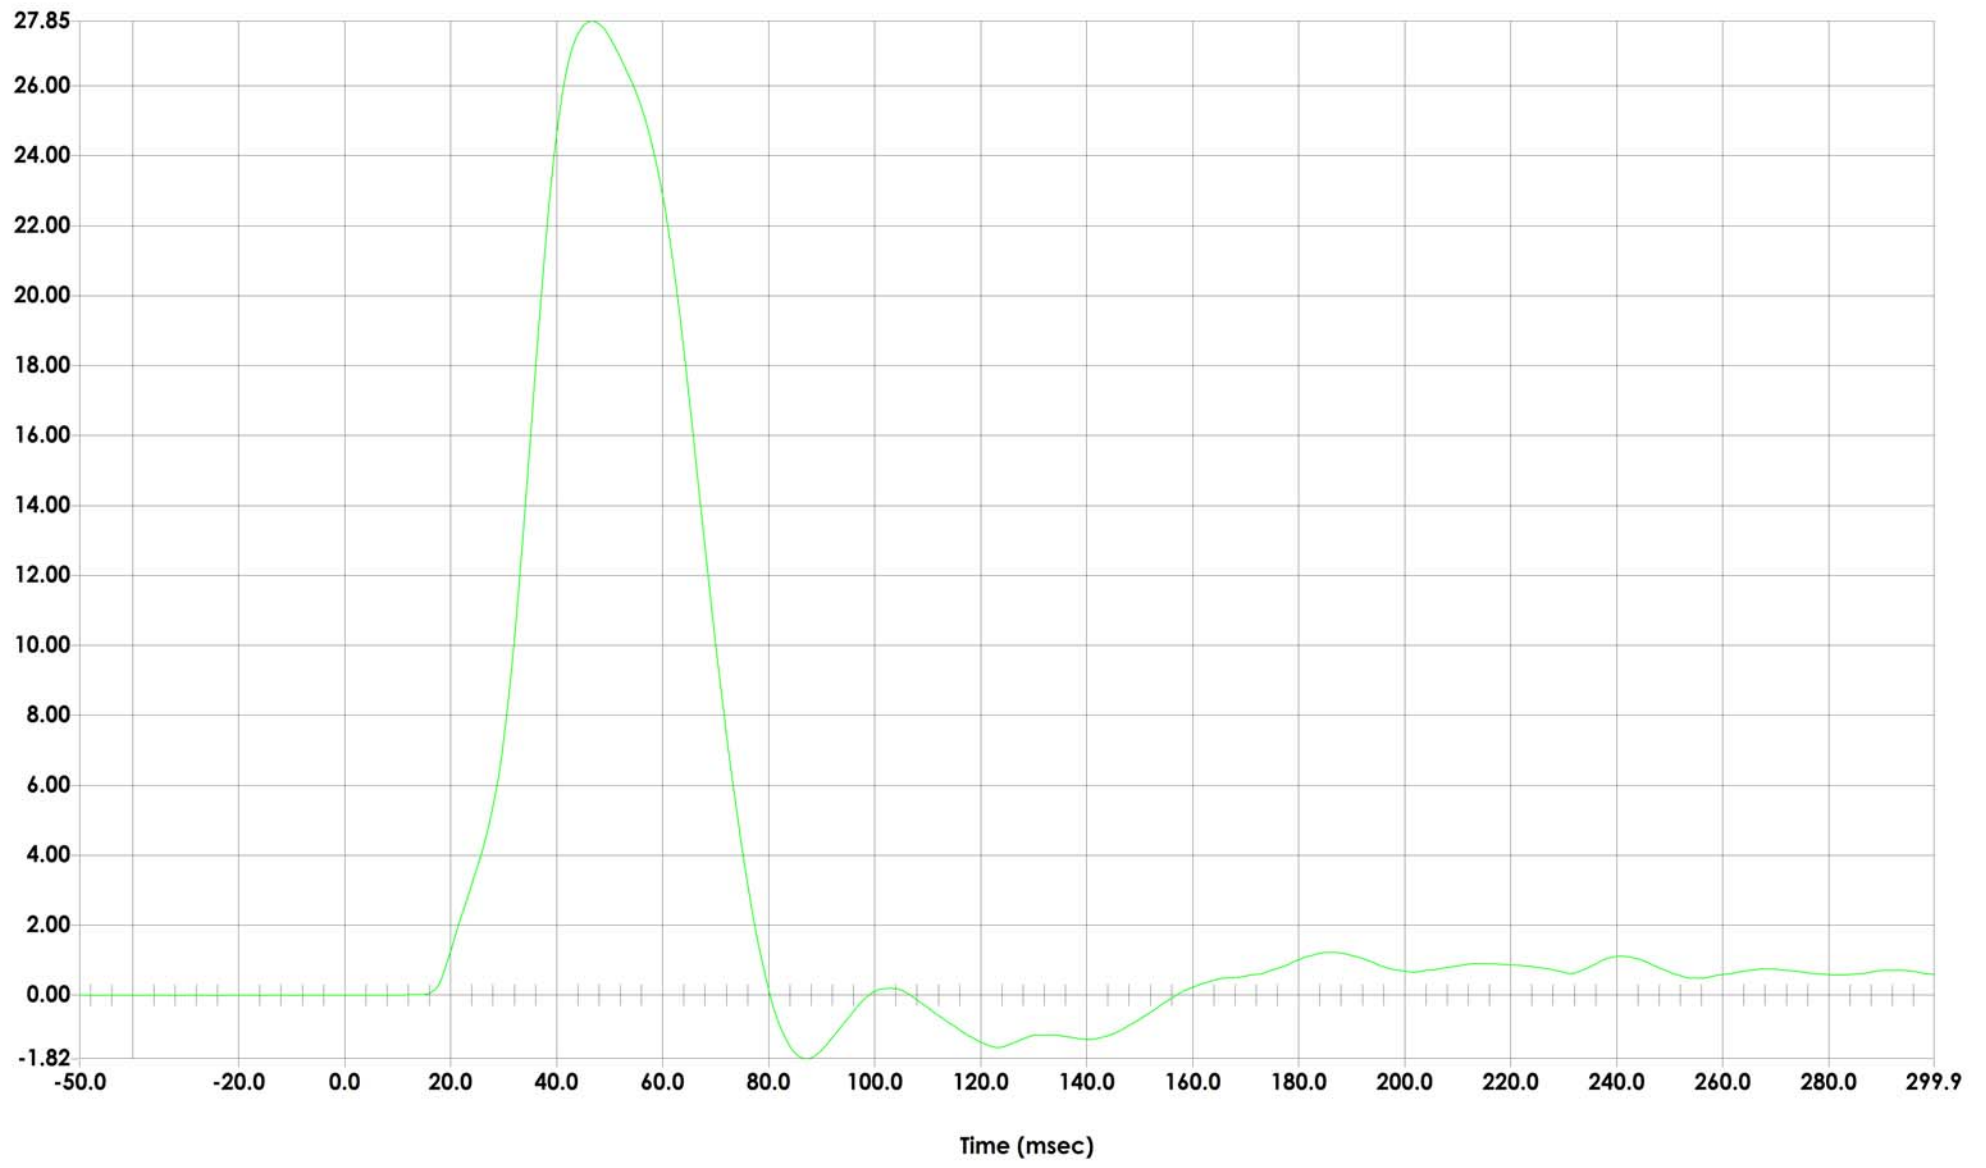


Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC180
Plot number	008
Units	MM

Max	26.90	MM
	48.16	msec
Min	-2.07	MM
	84.48	msec



Driver Middle Thorax Rib Deflection (Y) vs. Time

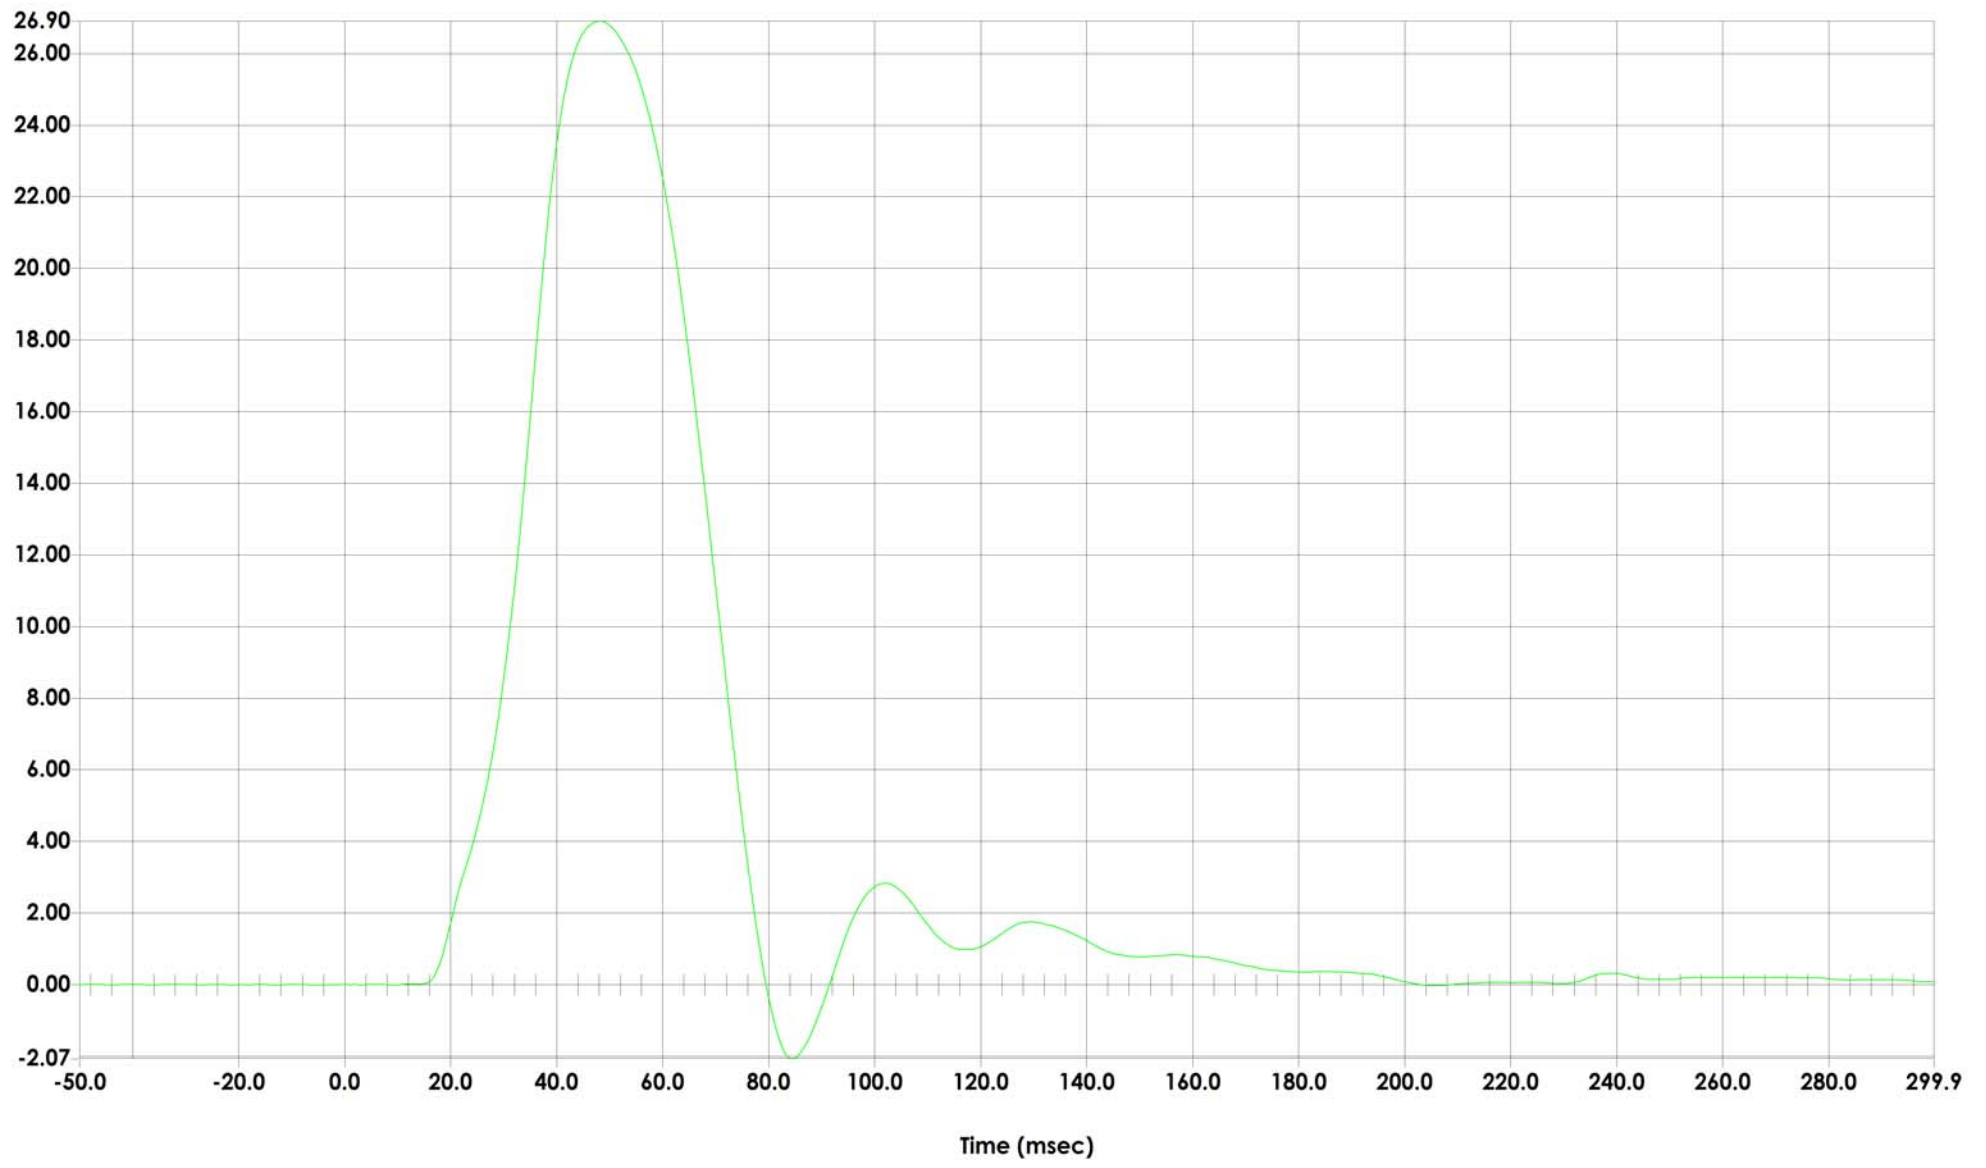


Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC180
Plot number	009
Units	MM

Max	27.87	MM
	49.44	msec
Min	-1.89	MM
	83.76	msec



Driver Lower Thorax Rib Deflection (Y) vs. Time

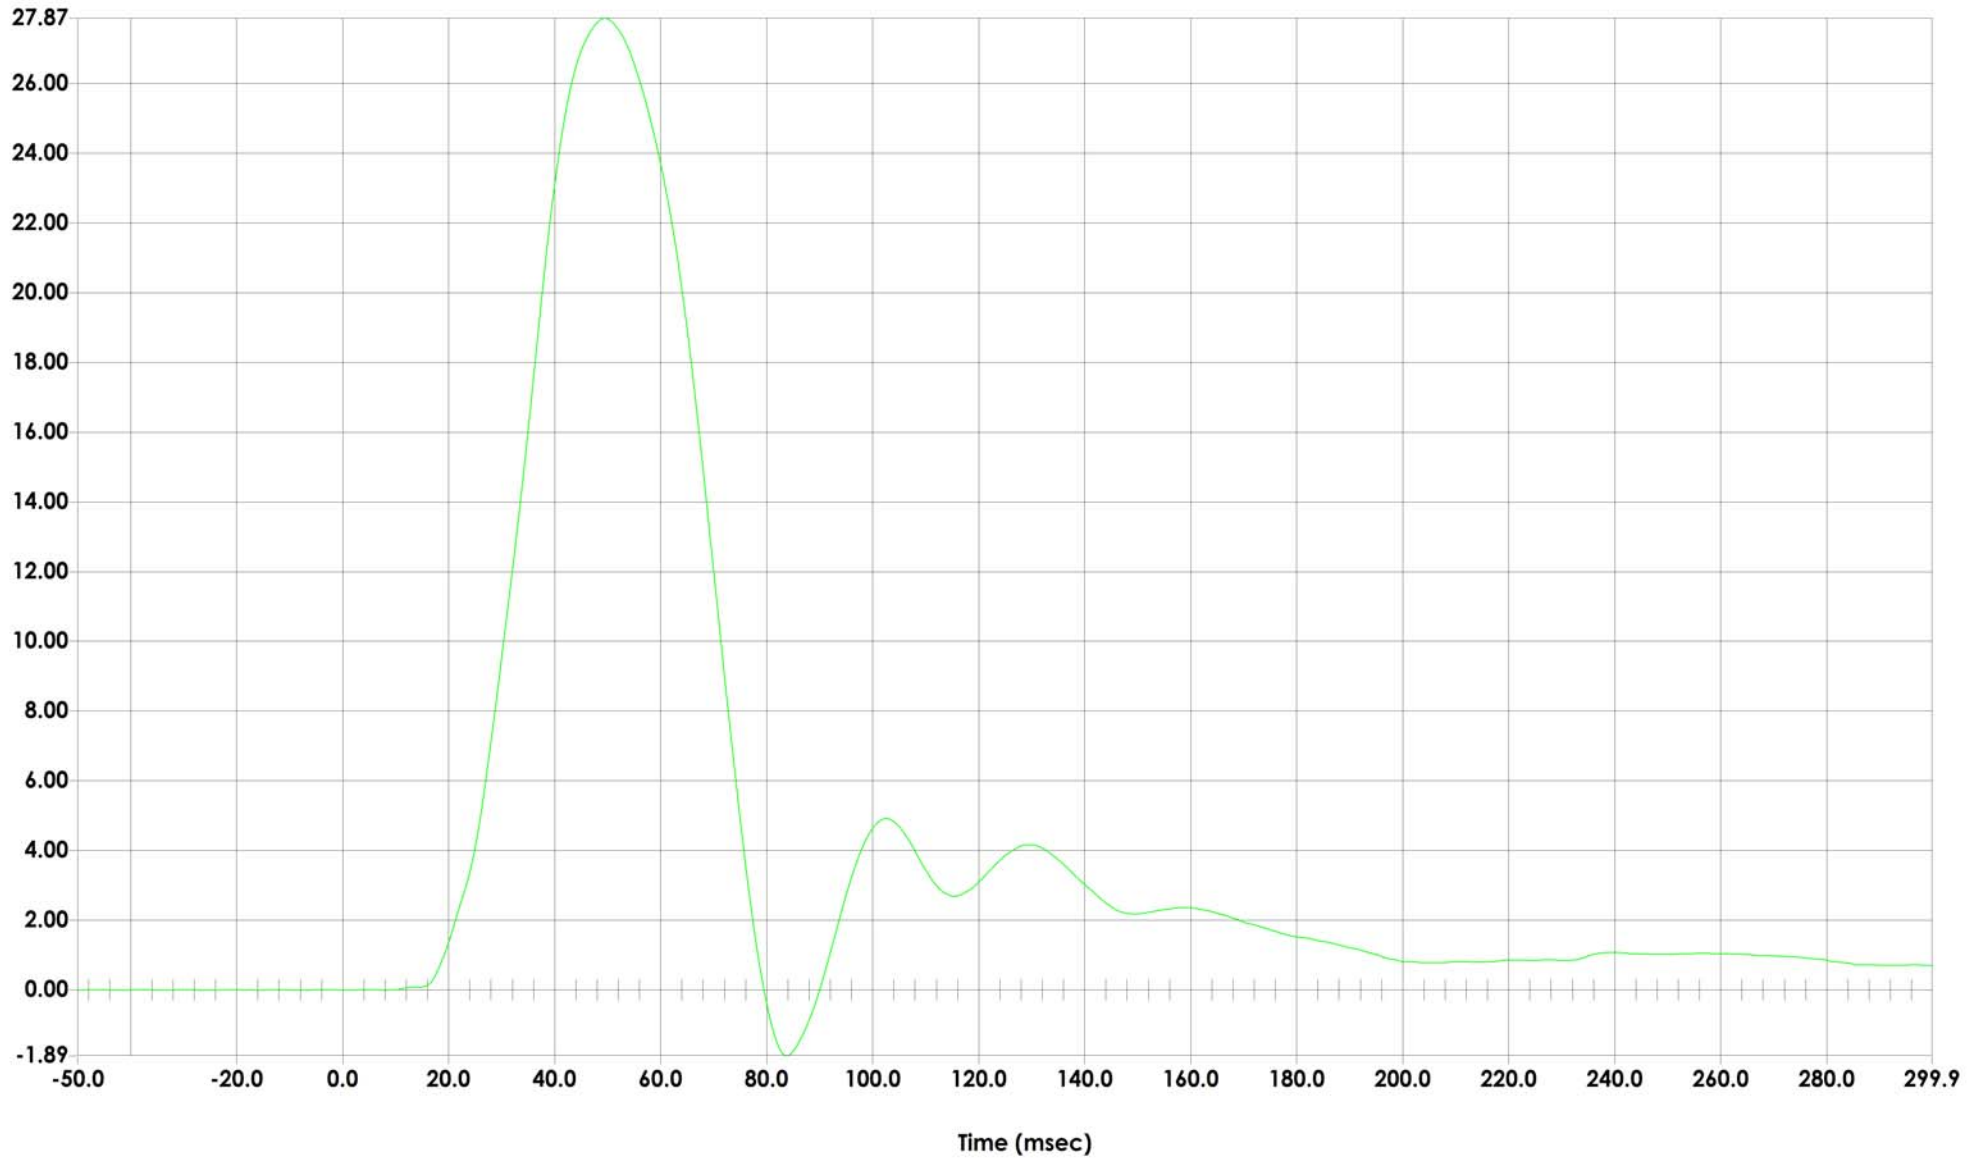


Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC180
Plot number	009
Units	MM

Max	27.87	MM
	49.44	msec
Min	-1.89	MM
	83.76	msec



Driver Rib Deflection Maximum vs. Time

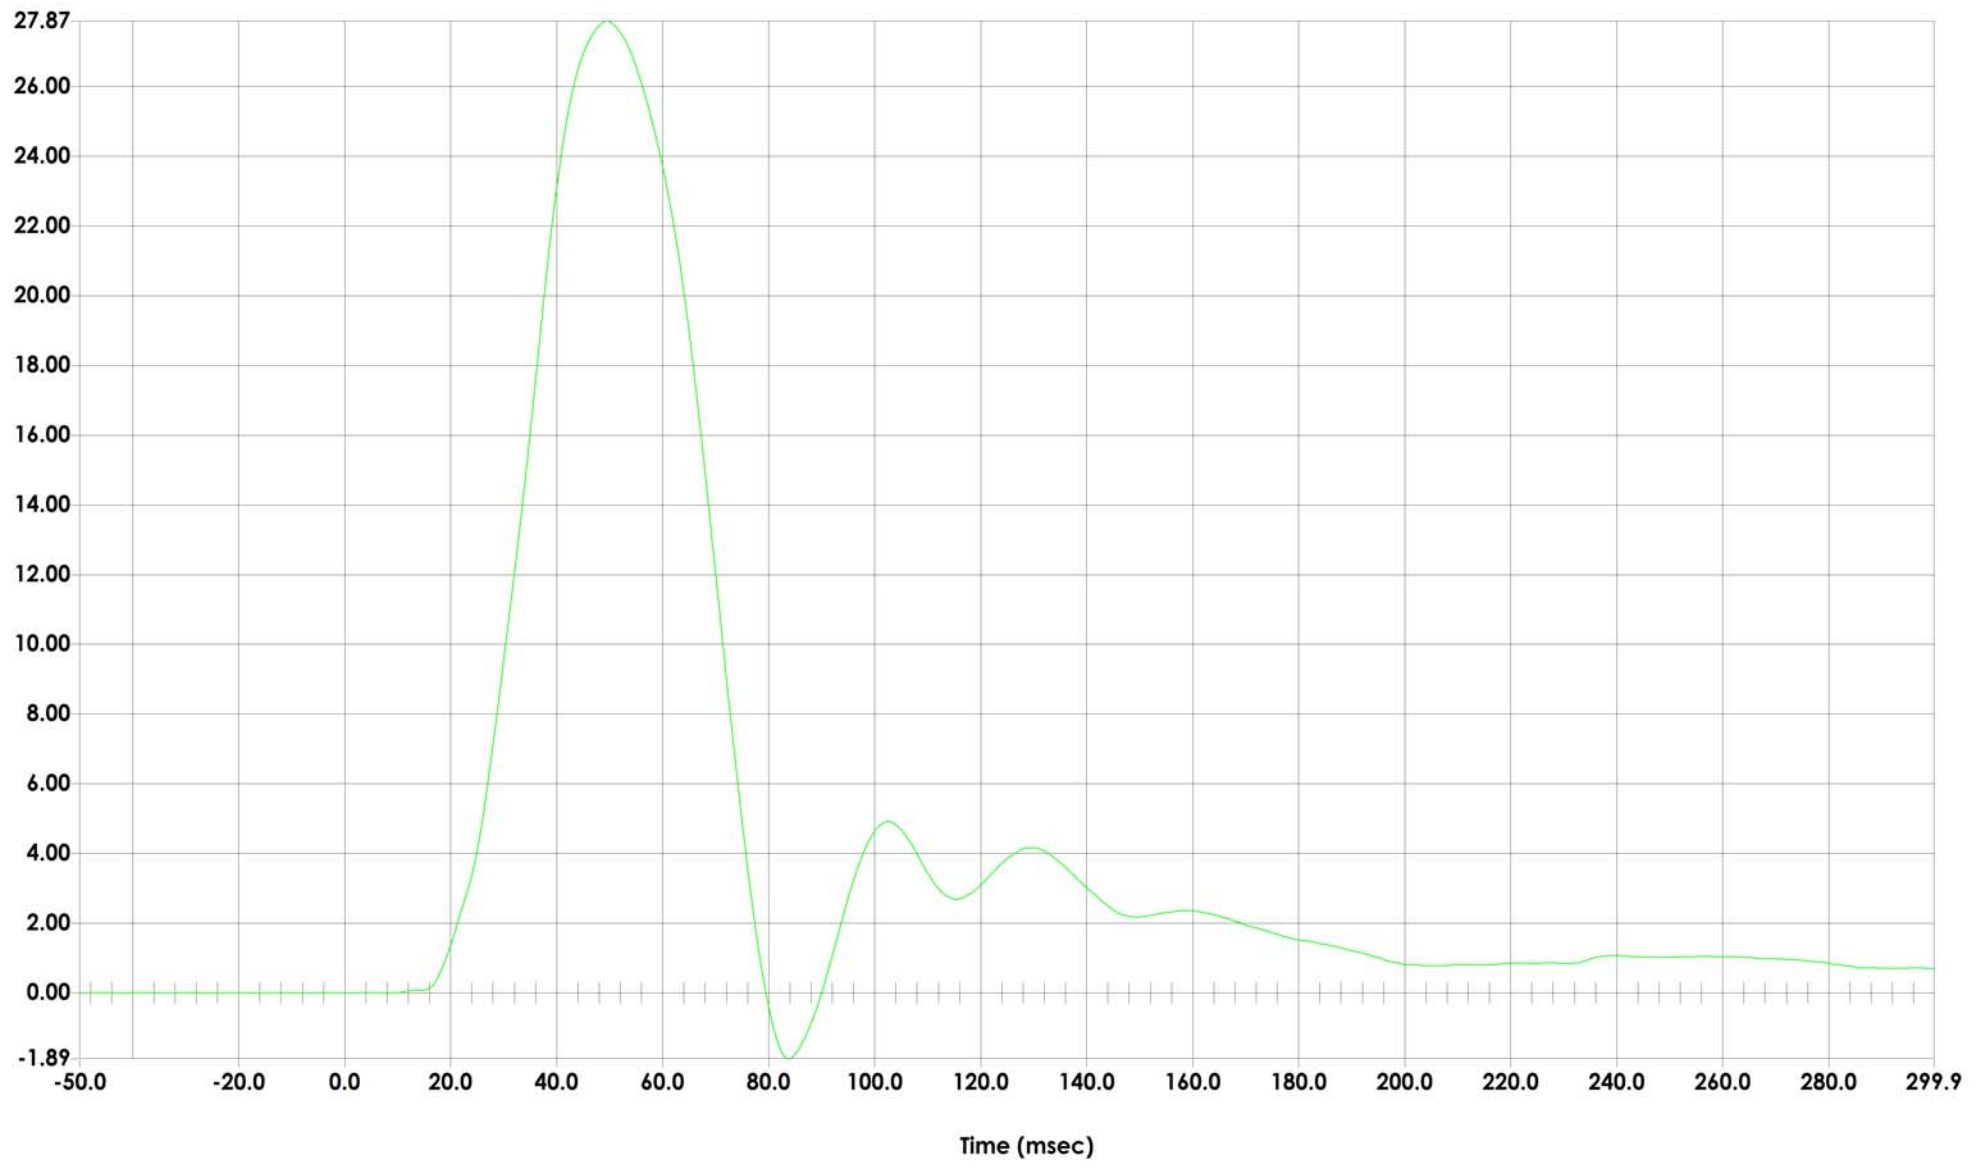


Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC600
Plot number	010
Units	NWT

Max	76.54	NWT
	60.72	msec
Min	-20.97	NWT
	31.76	msec



Driver Anterior Abdominal Force (Y) vs. Time

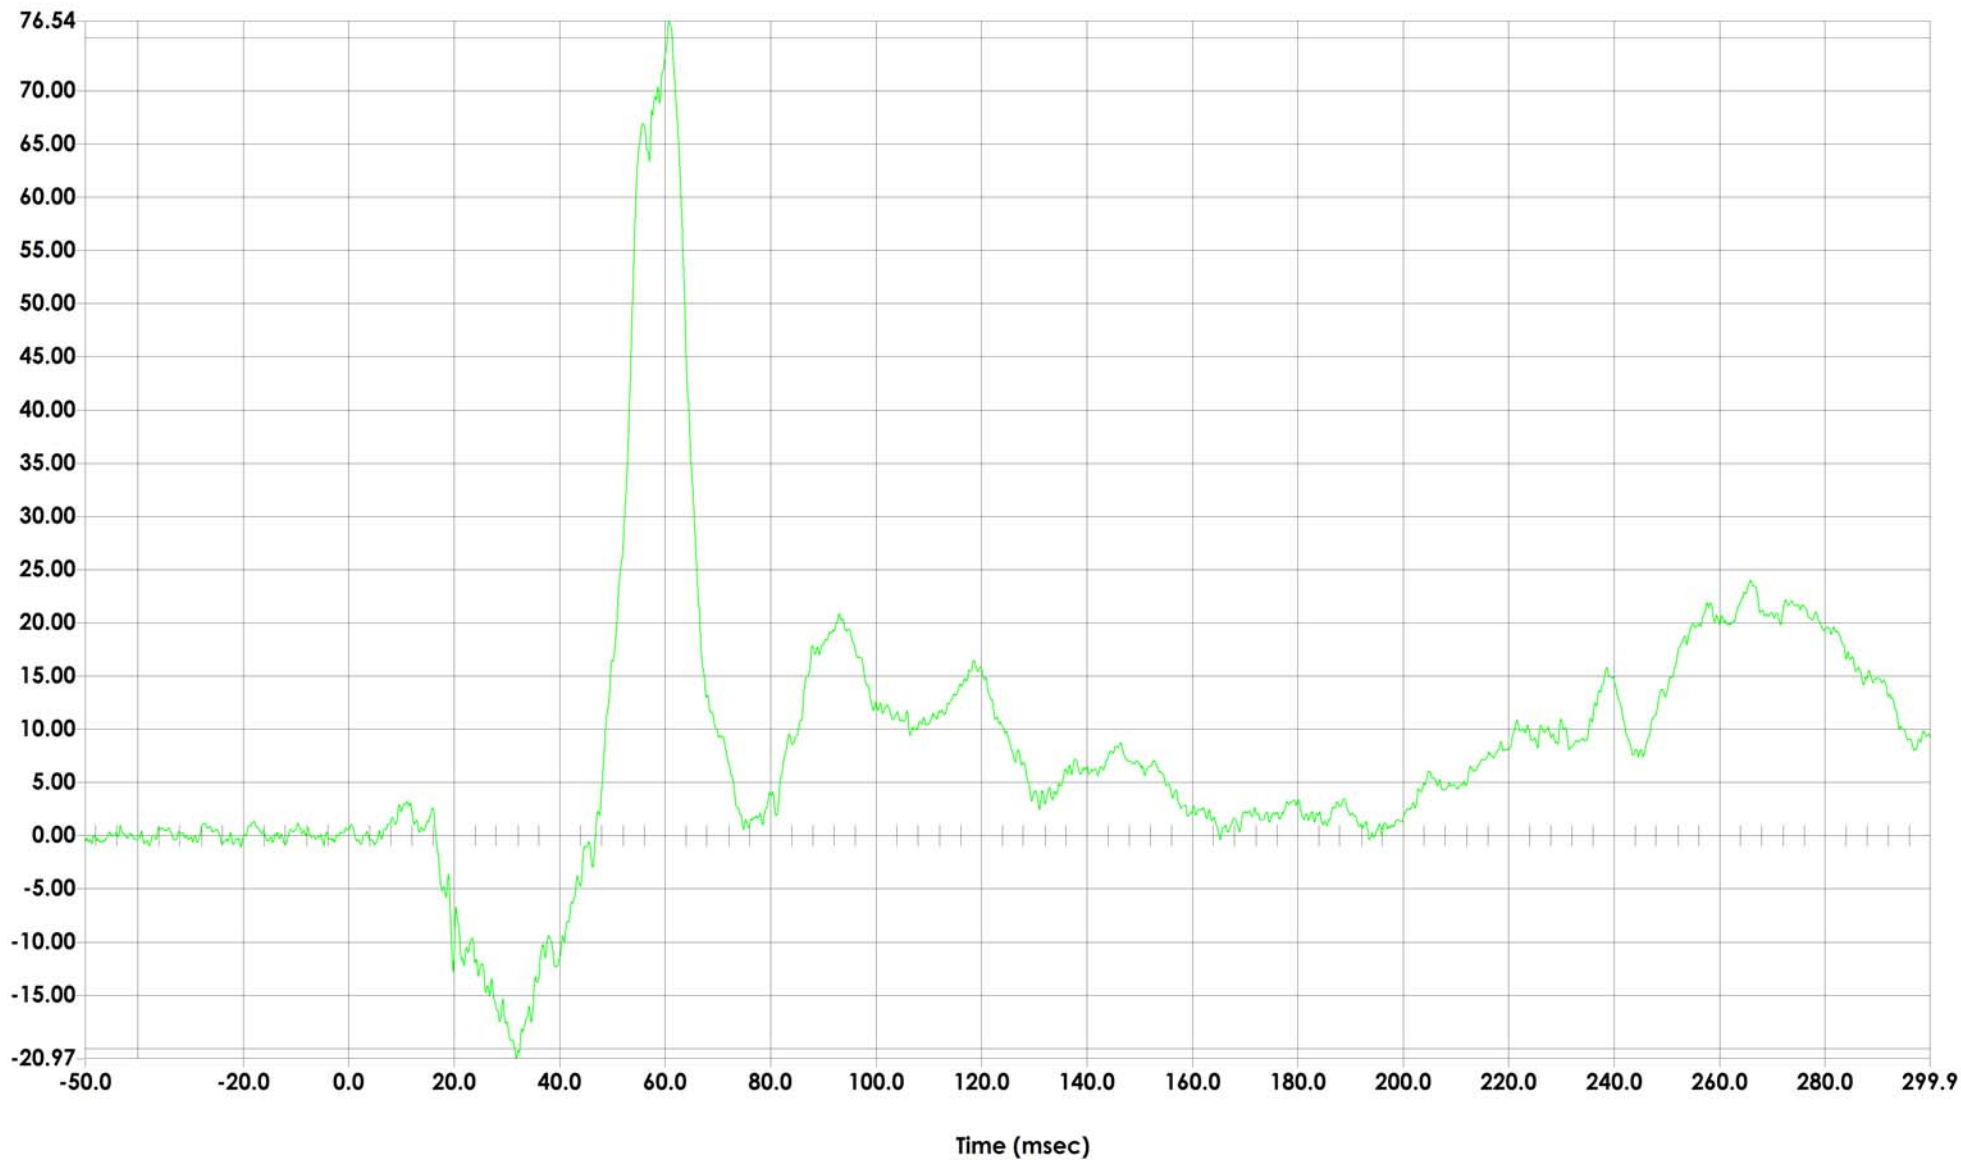


Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC600
Plot number	011
Units	NWT

Max	153.37	NWT
	55.52	msec
Min	-32.61	NWT
	46.00	msec



Driver Middle Abdominal Force (Y) vs. Time

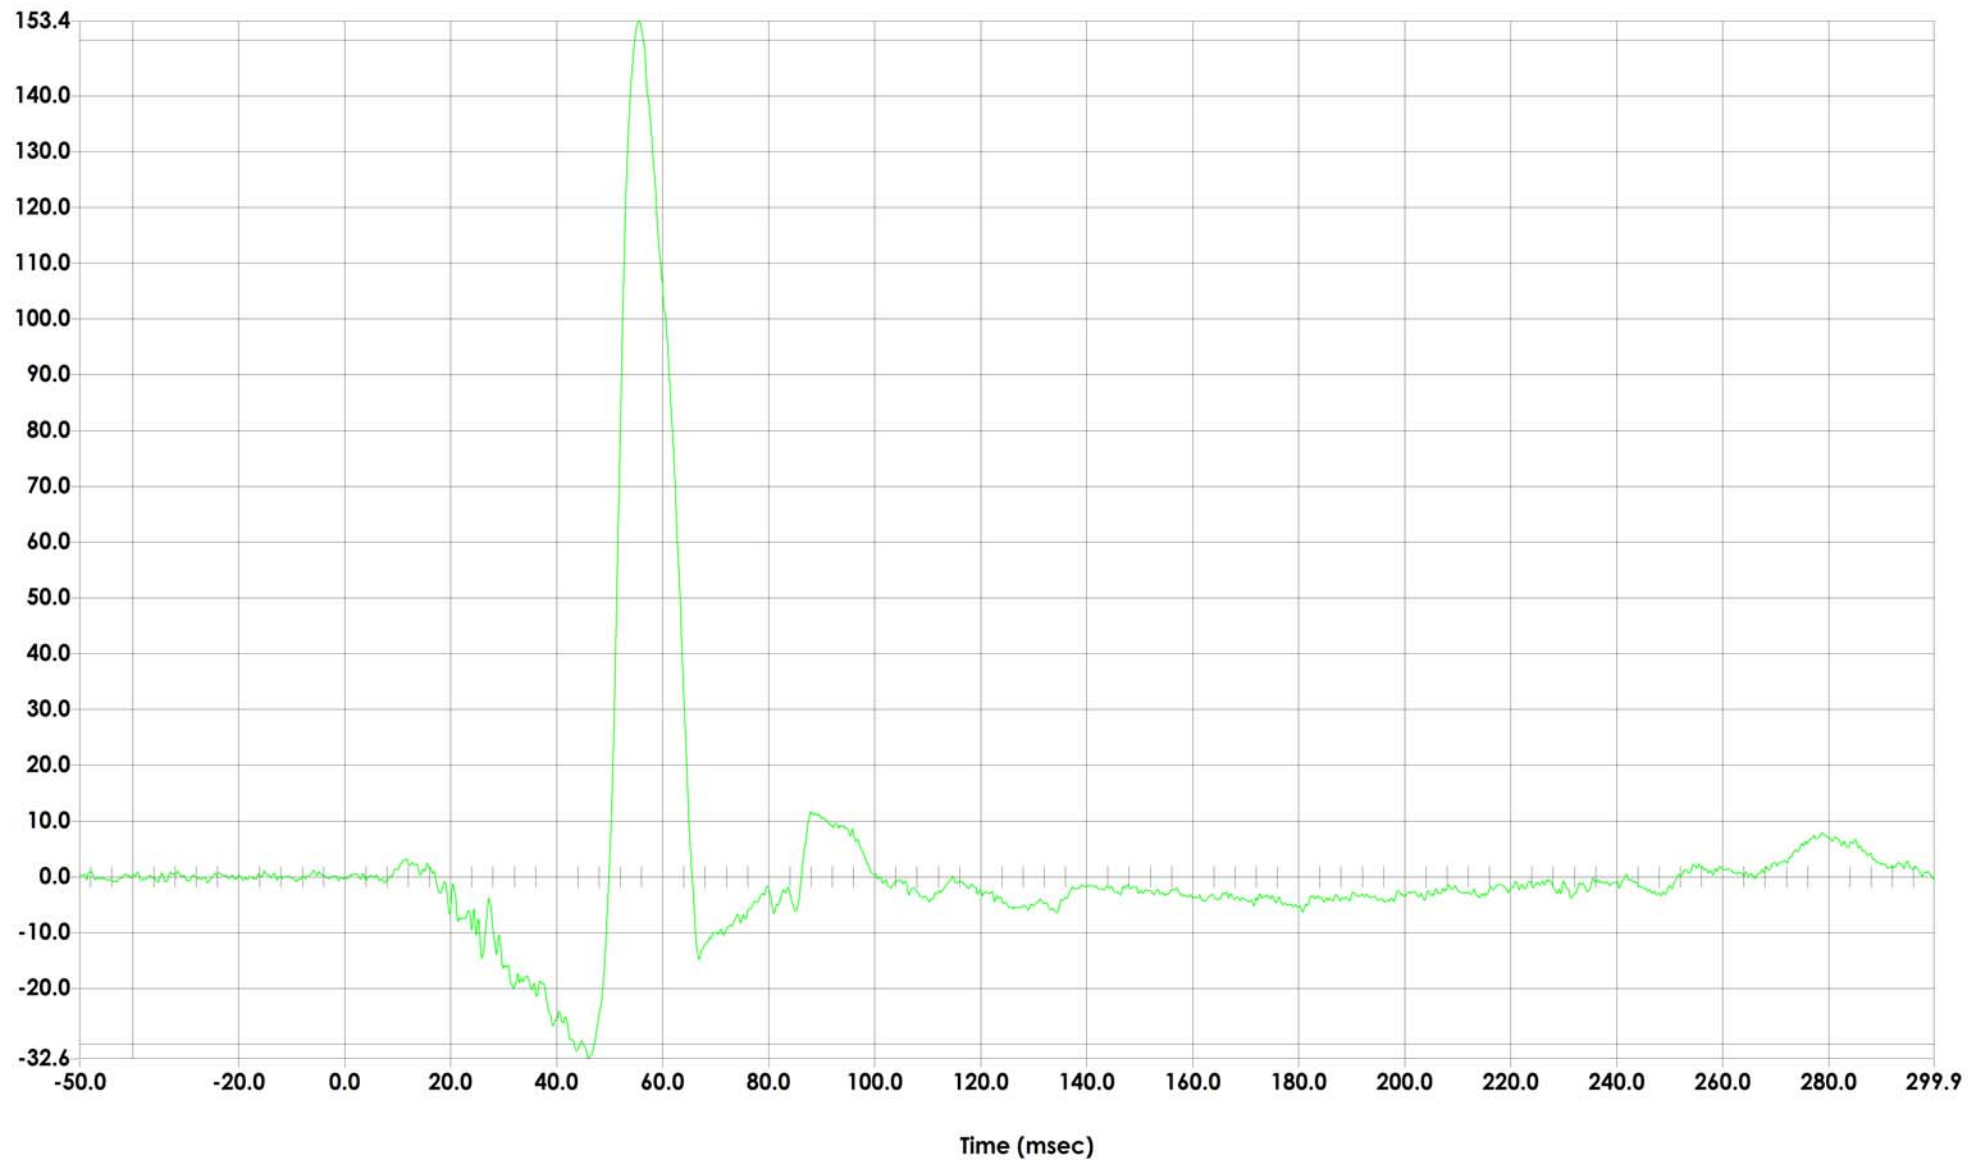


Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC600
Plot number	012
Units	NWT

Max	168.44	NWT
	56.72	msec
Min	-11.46	NWT
	26.00	msec



Driver Posterior Abdominal Force (Y) vs. Time

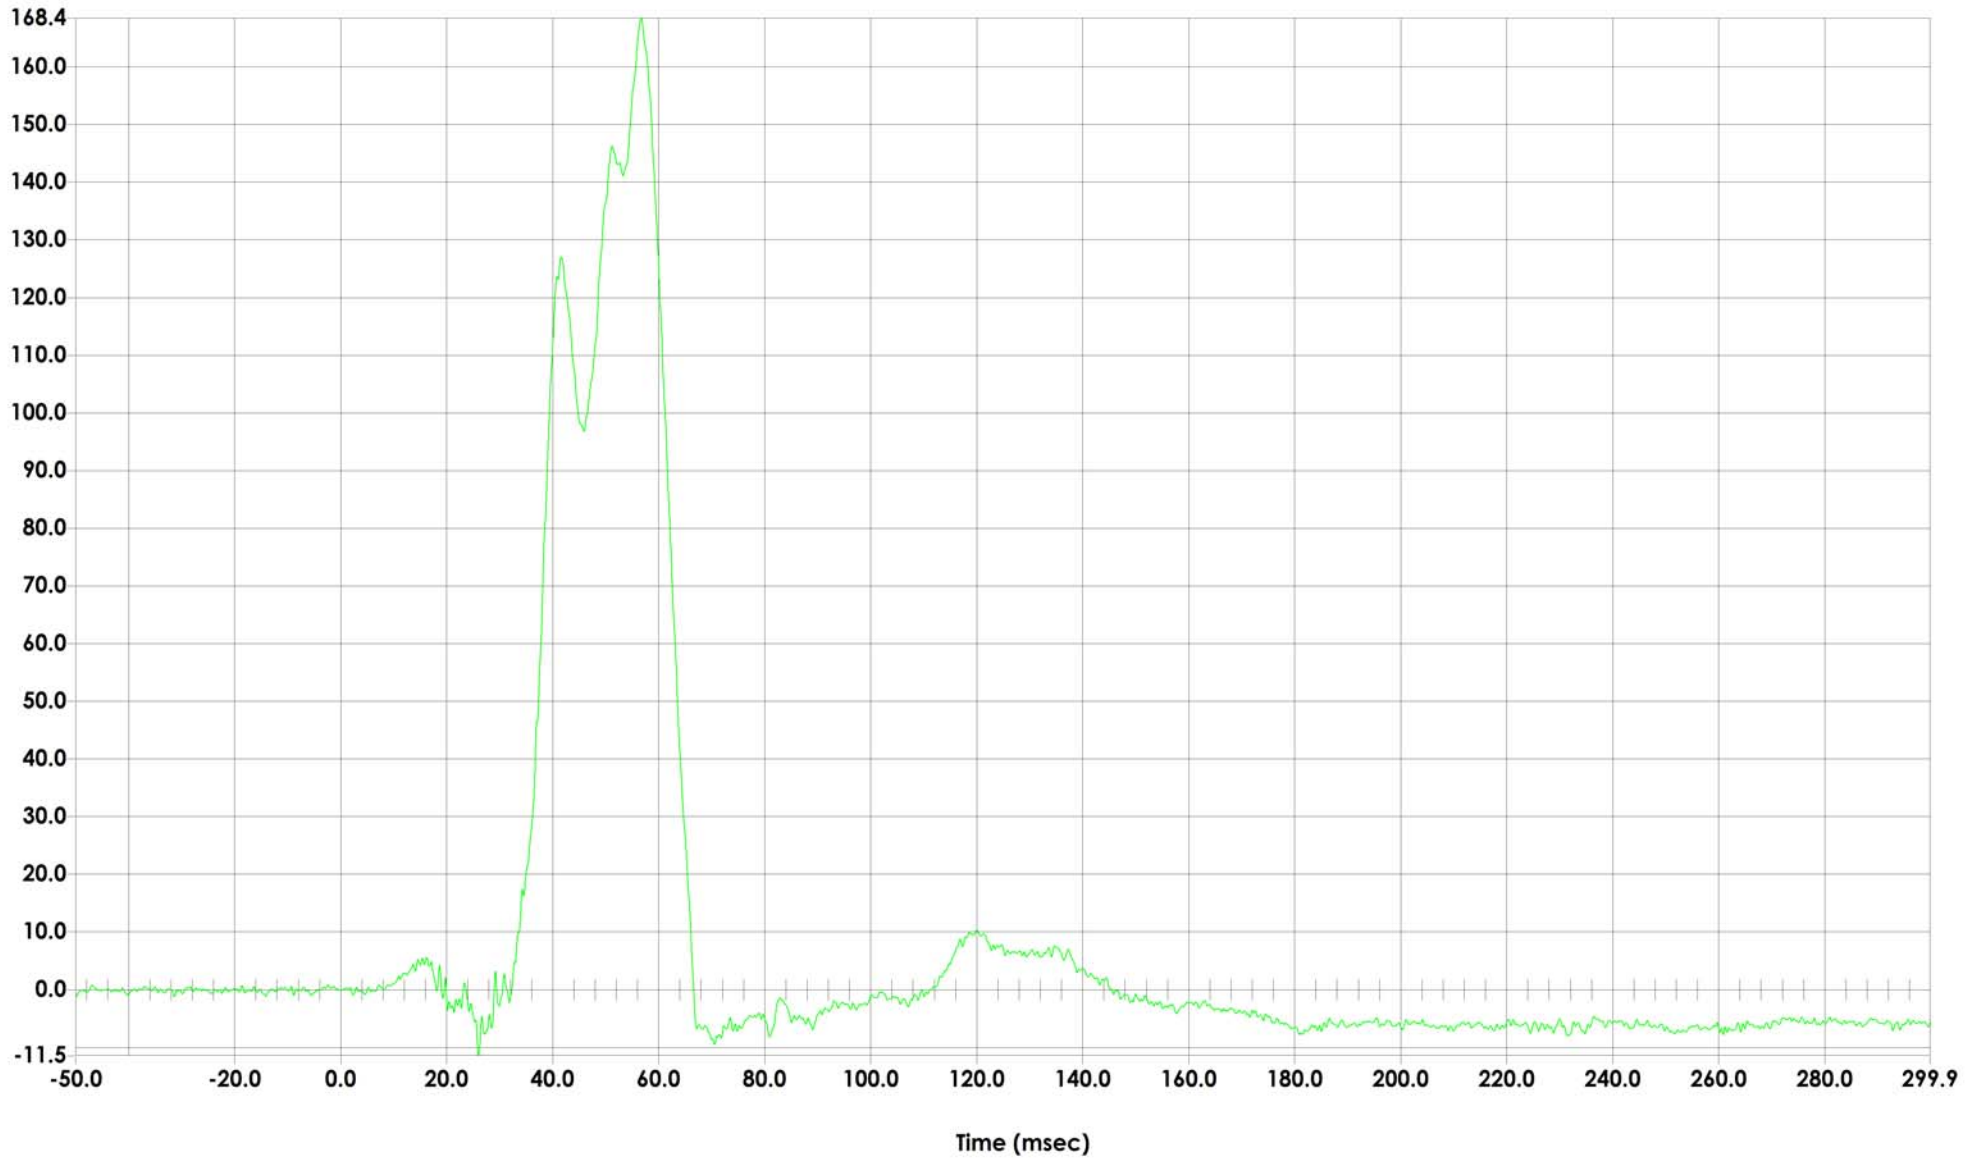


Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC600
Plot number	057
Units	NWT

Max	383.40	NWT
	56.08	msec
Min	-43.24	NWT
	31.84	msec



Driver Total Abdominal Force (Y) vs. Time

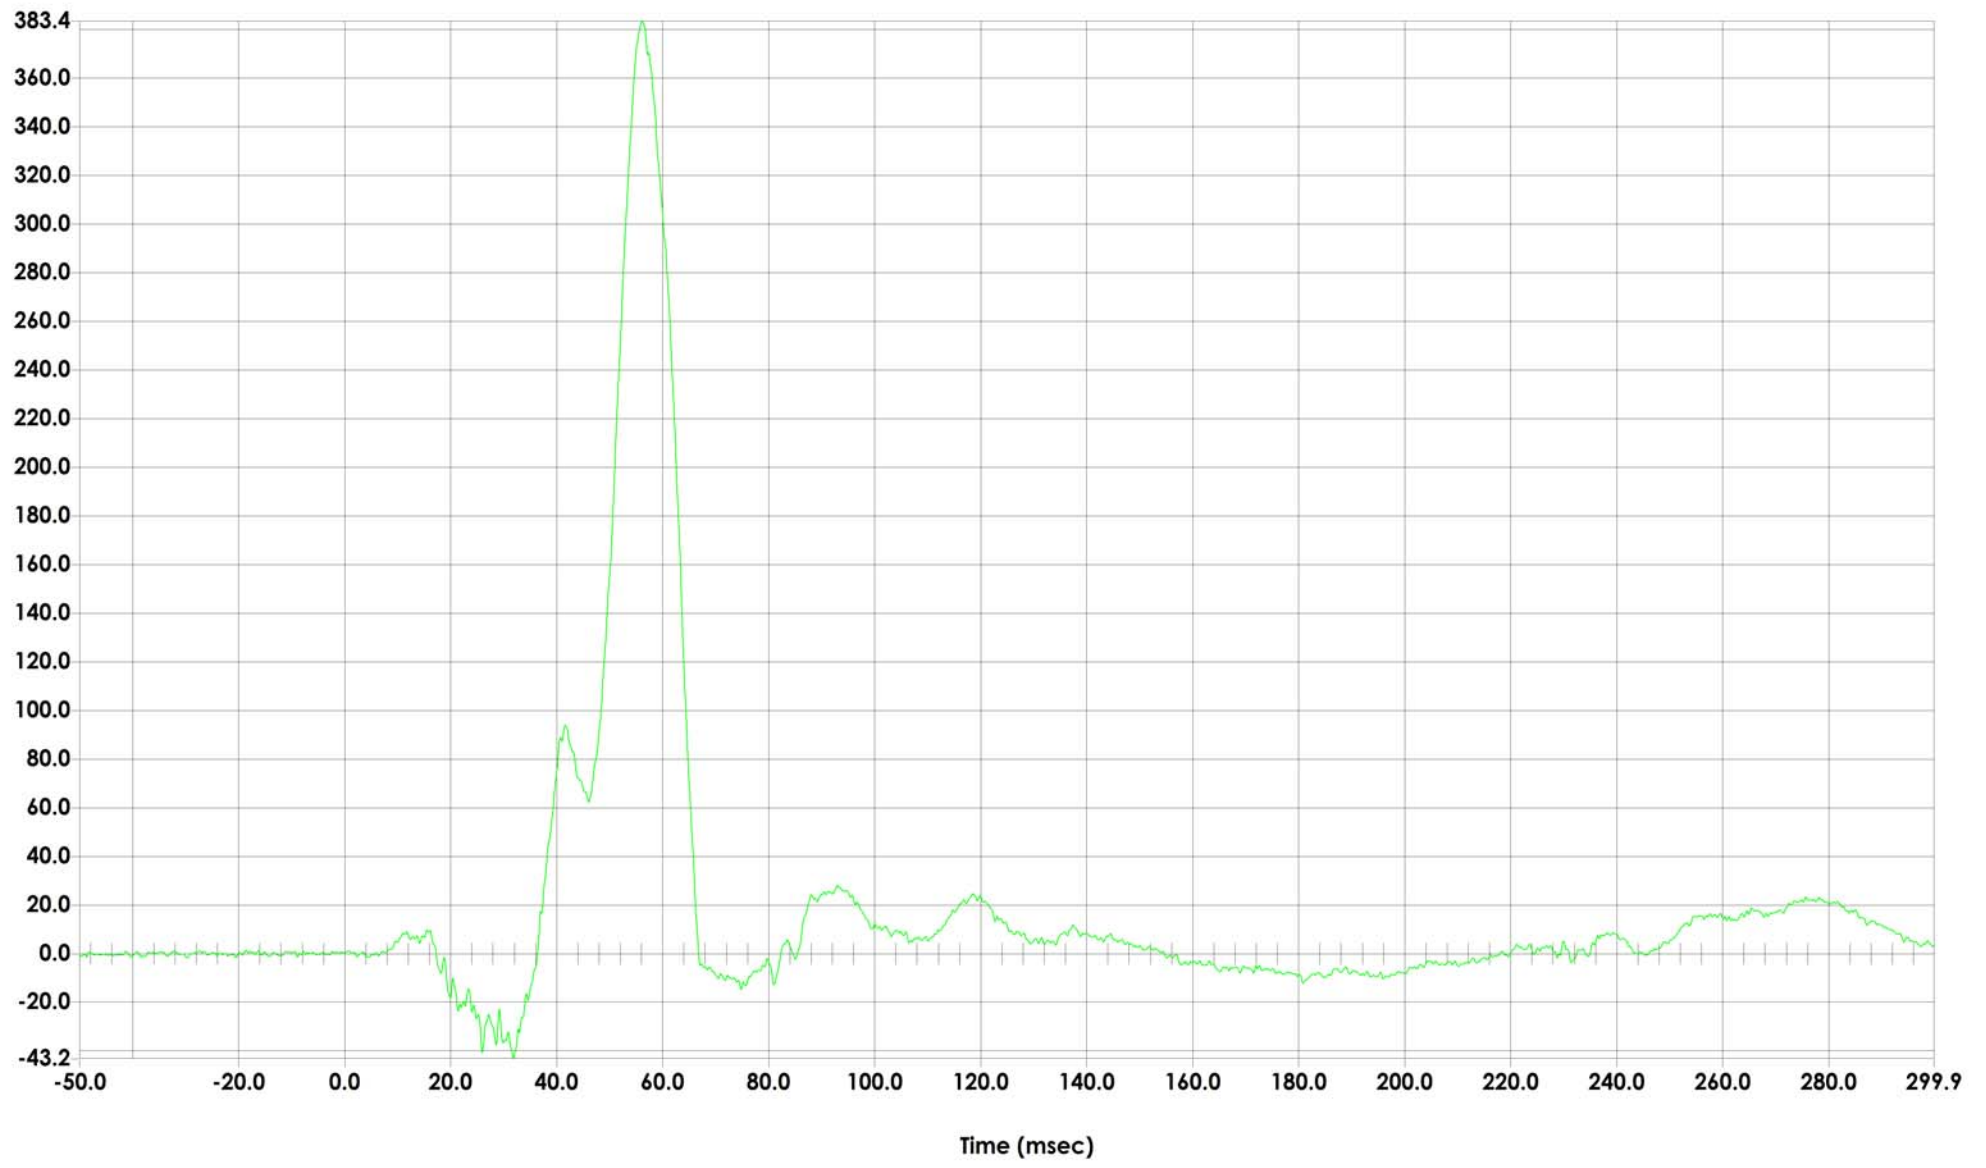


Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC600
Plot number	016
Units	NWT

Max	39.86	NWT
	92.64	msec
Min	-1894.10	NWT
	50.80	msec



Driver Pubic Symphysis Force (Y) vs. Time

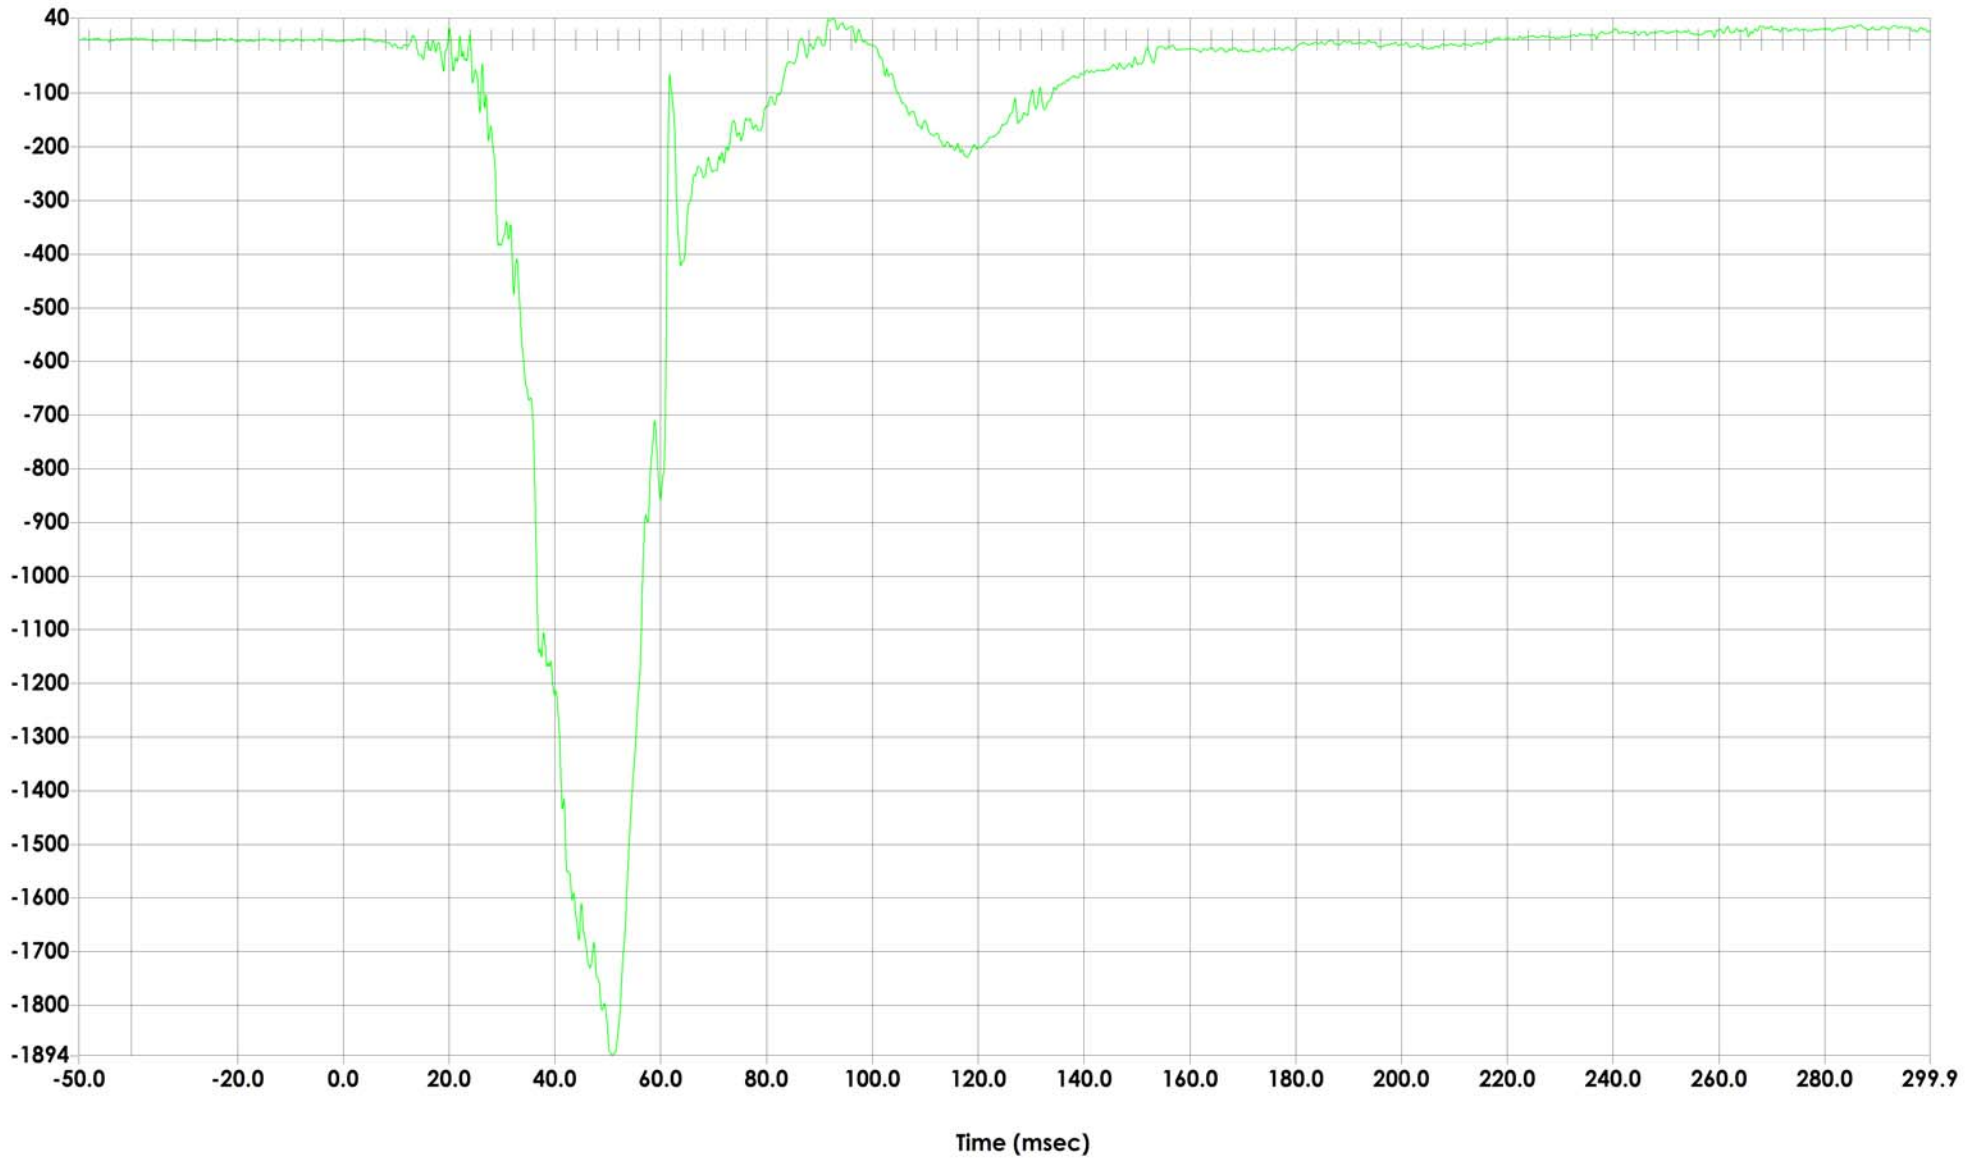


Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC1000
Plot number	017
Units	G'S

Max	11.41	G'S
	249.68	msec
Min	-23.17	G'S
	69.20	msec



Passenger Head Acceleration (X) Primary vs. Time

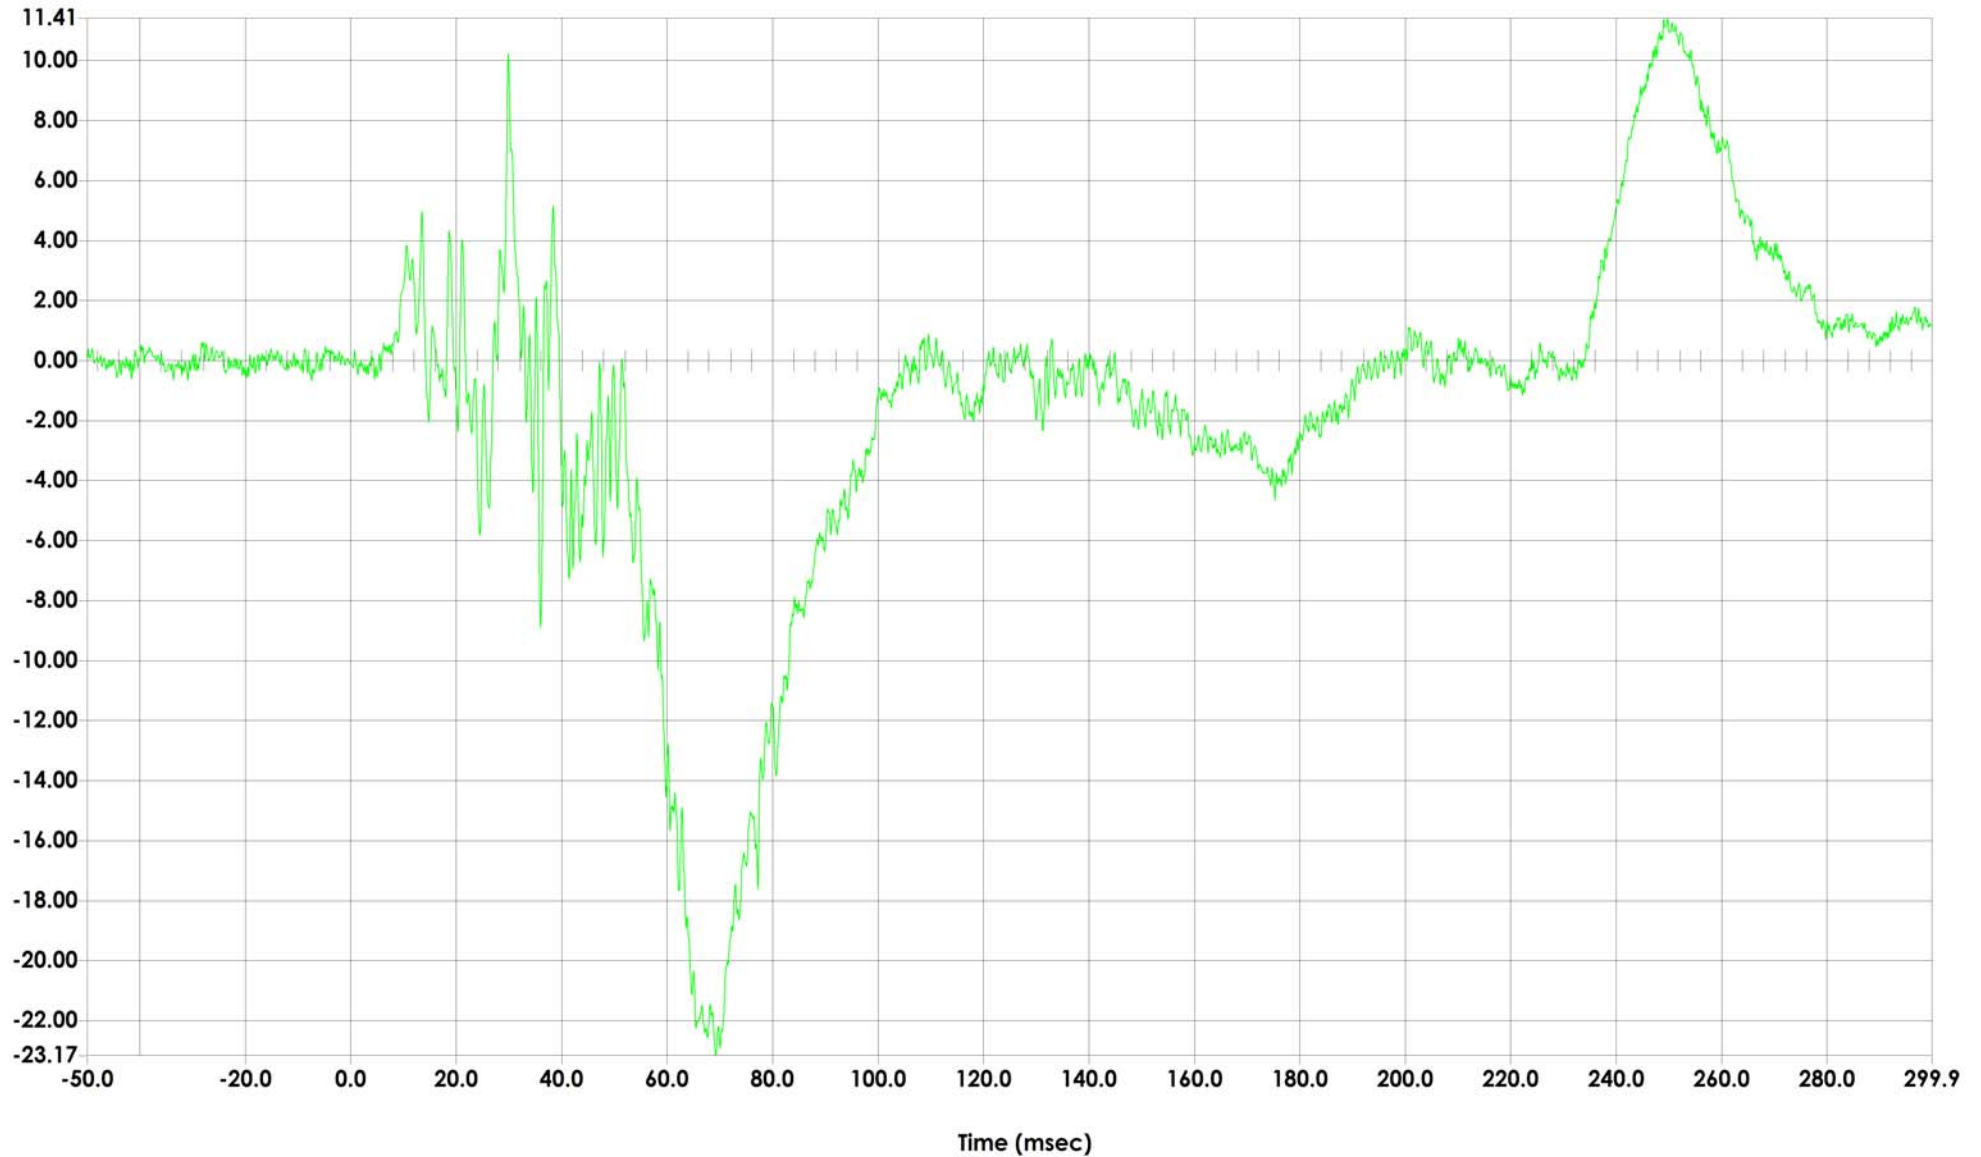


Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC1000
Plot number	018
Units	G'S

Max	44.34	G'S
	66.88	msec
Min	-8.51	G'S
	250.96	msec



Passenger Head Acceleration (Y) Primary vs. Time

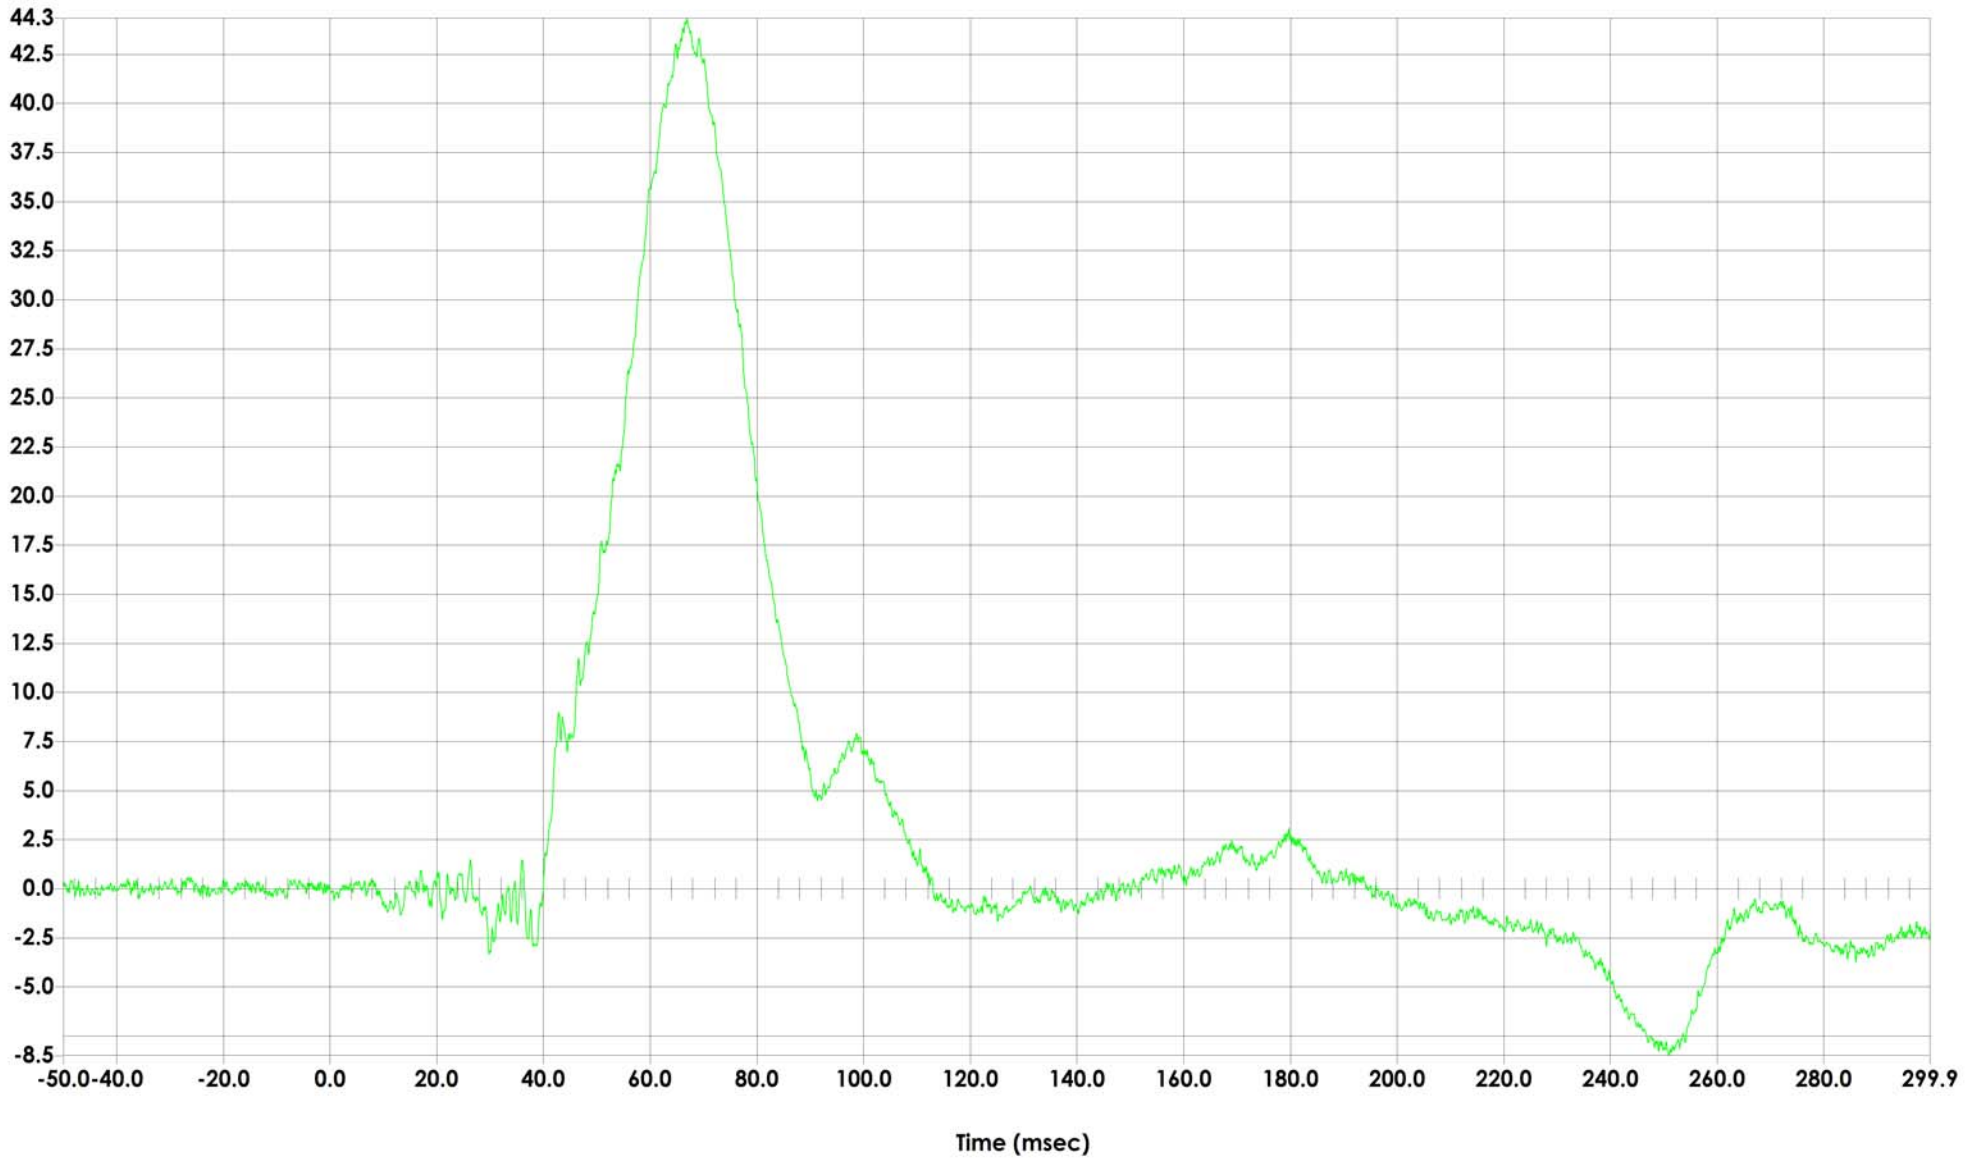


Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC1000
Plot number	019
Units	G'S

Max	11.88	G'S
	226.56	msec
Min	-5.81	G'S
	47.68	msec



Passenger Head Acceleration (Z) Primary vs. Time

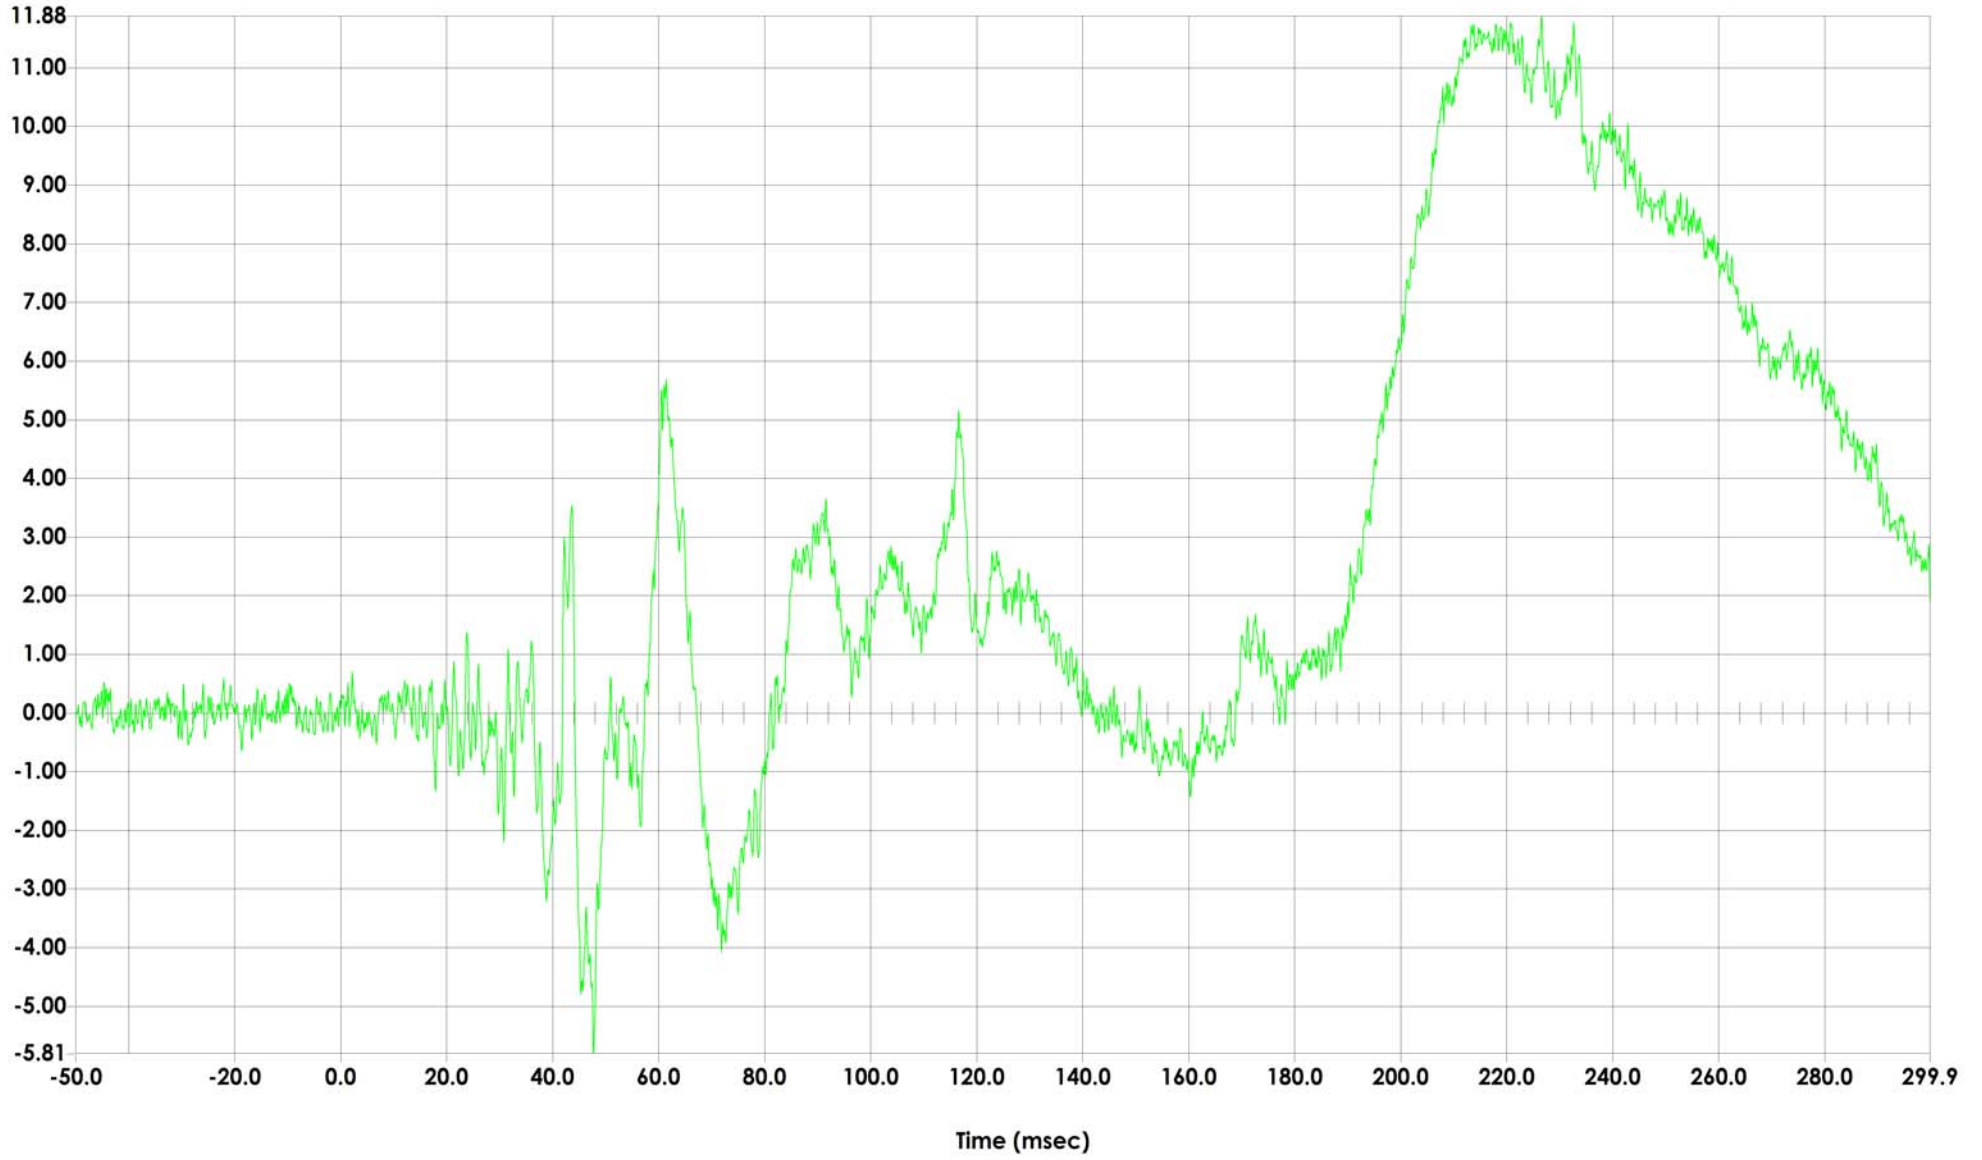


Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC1000
Plot number	060
Units	G'S

Max	49.55	G'S
	66.96	msec
Min	0.05	G'S
	4.08	msec



Passenger Head Resultant Acceleration Primary vs. Time

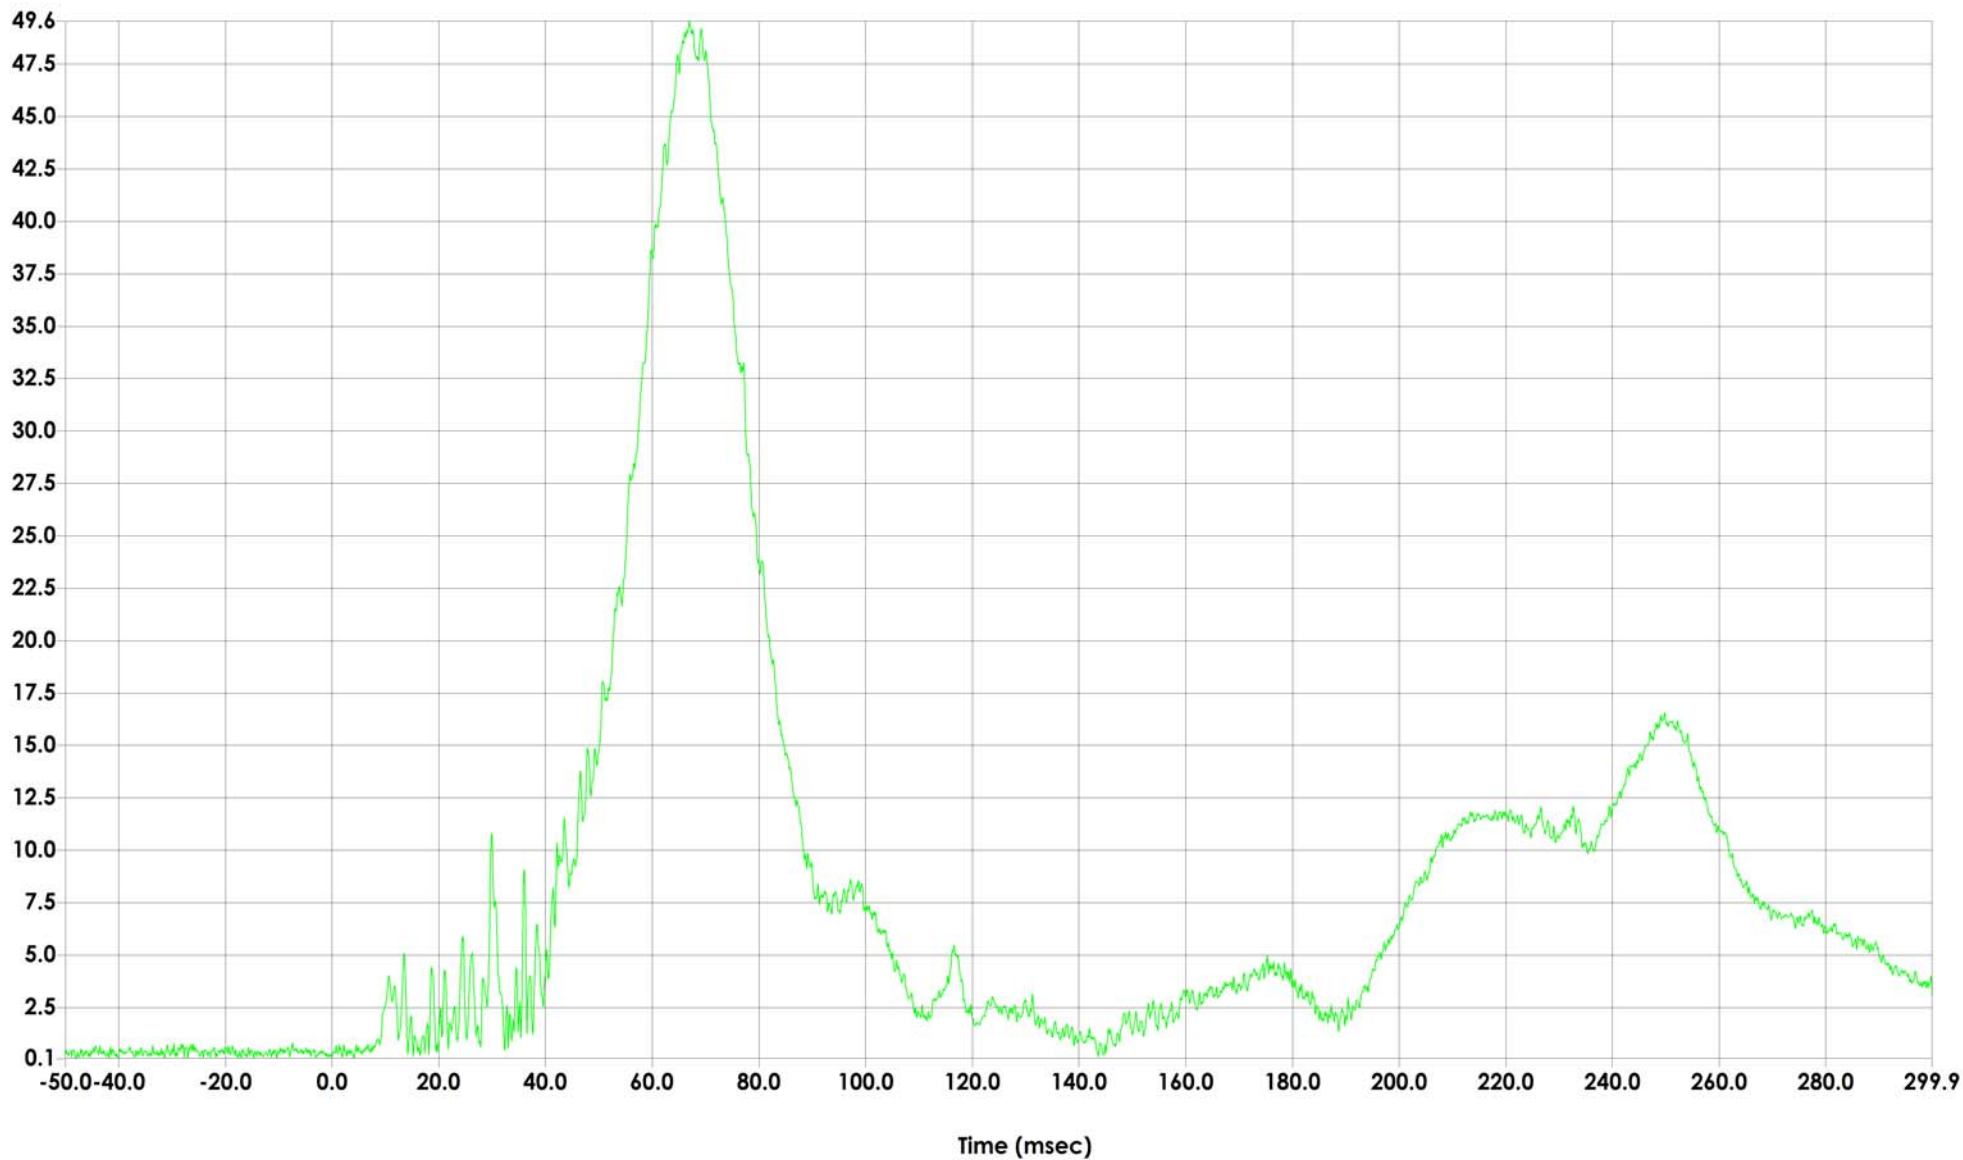


Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC180
Plot number	028
Units	G'S

Max	17.52	G'S
	75.04	msec
Min	-15.04	G'S
	52.88	msec



Passenger Lower Spine T12 Acceleration (X) vs. Time

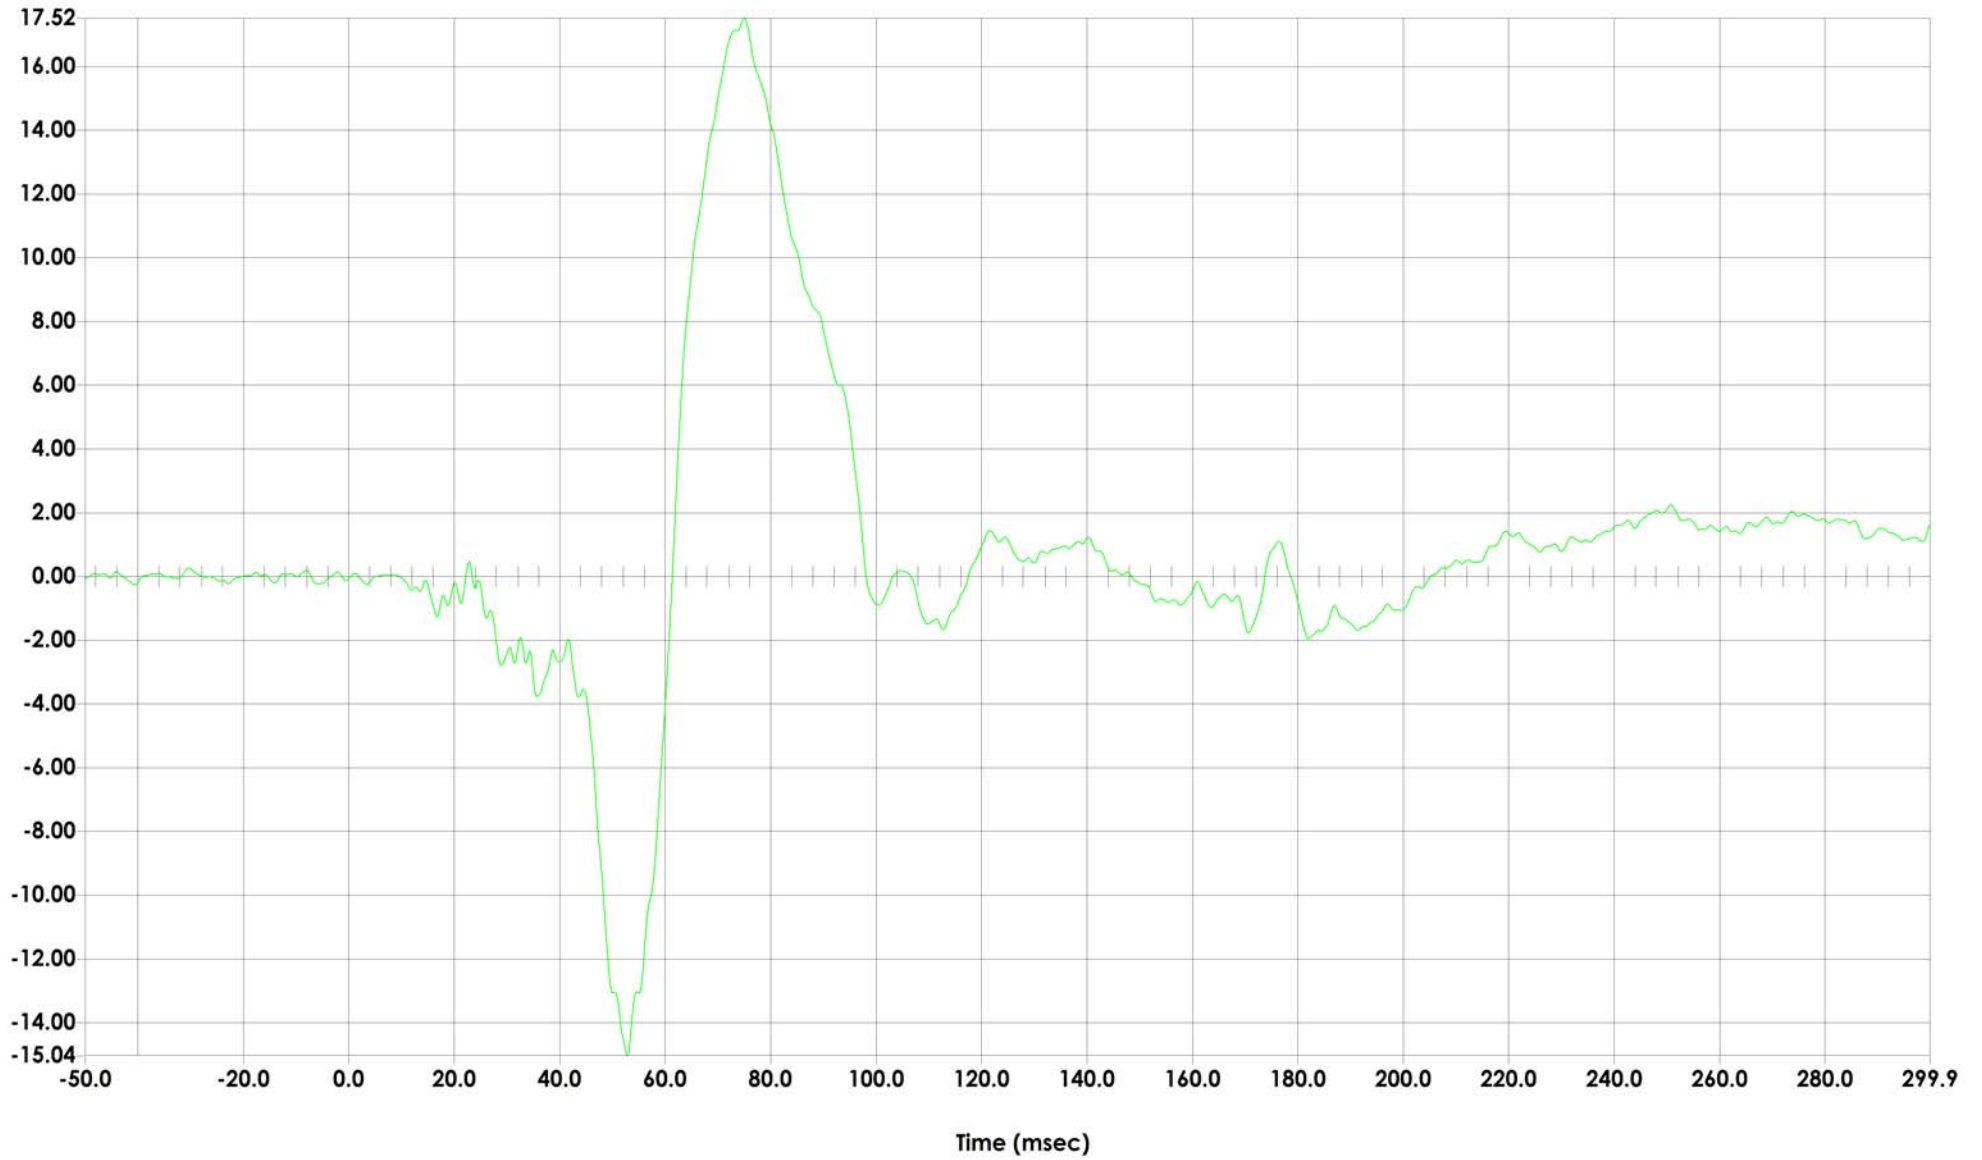


Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC180
Plot number	029
Units	G'S

Max	55.93	G'S
	57.76	msec
Min	-5.52	G'S
	172.88	msec



Passenger Lower Spine T12 Acceleration (Y) vs. Time

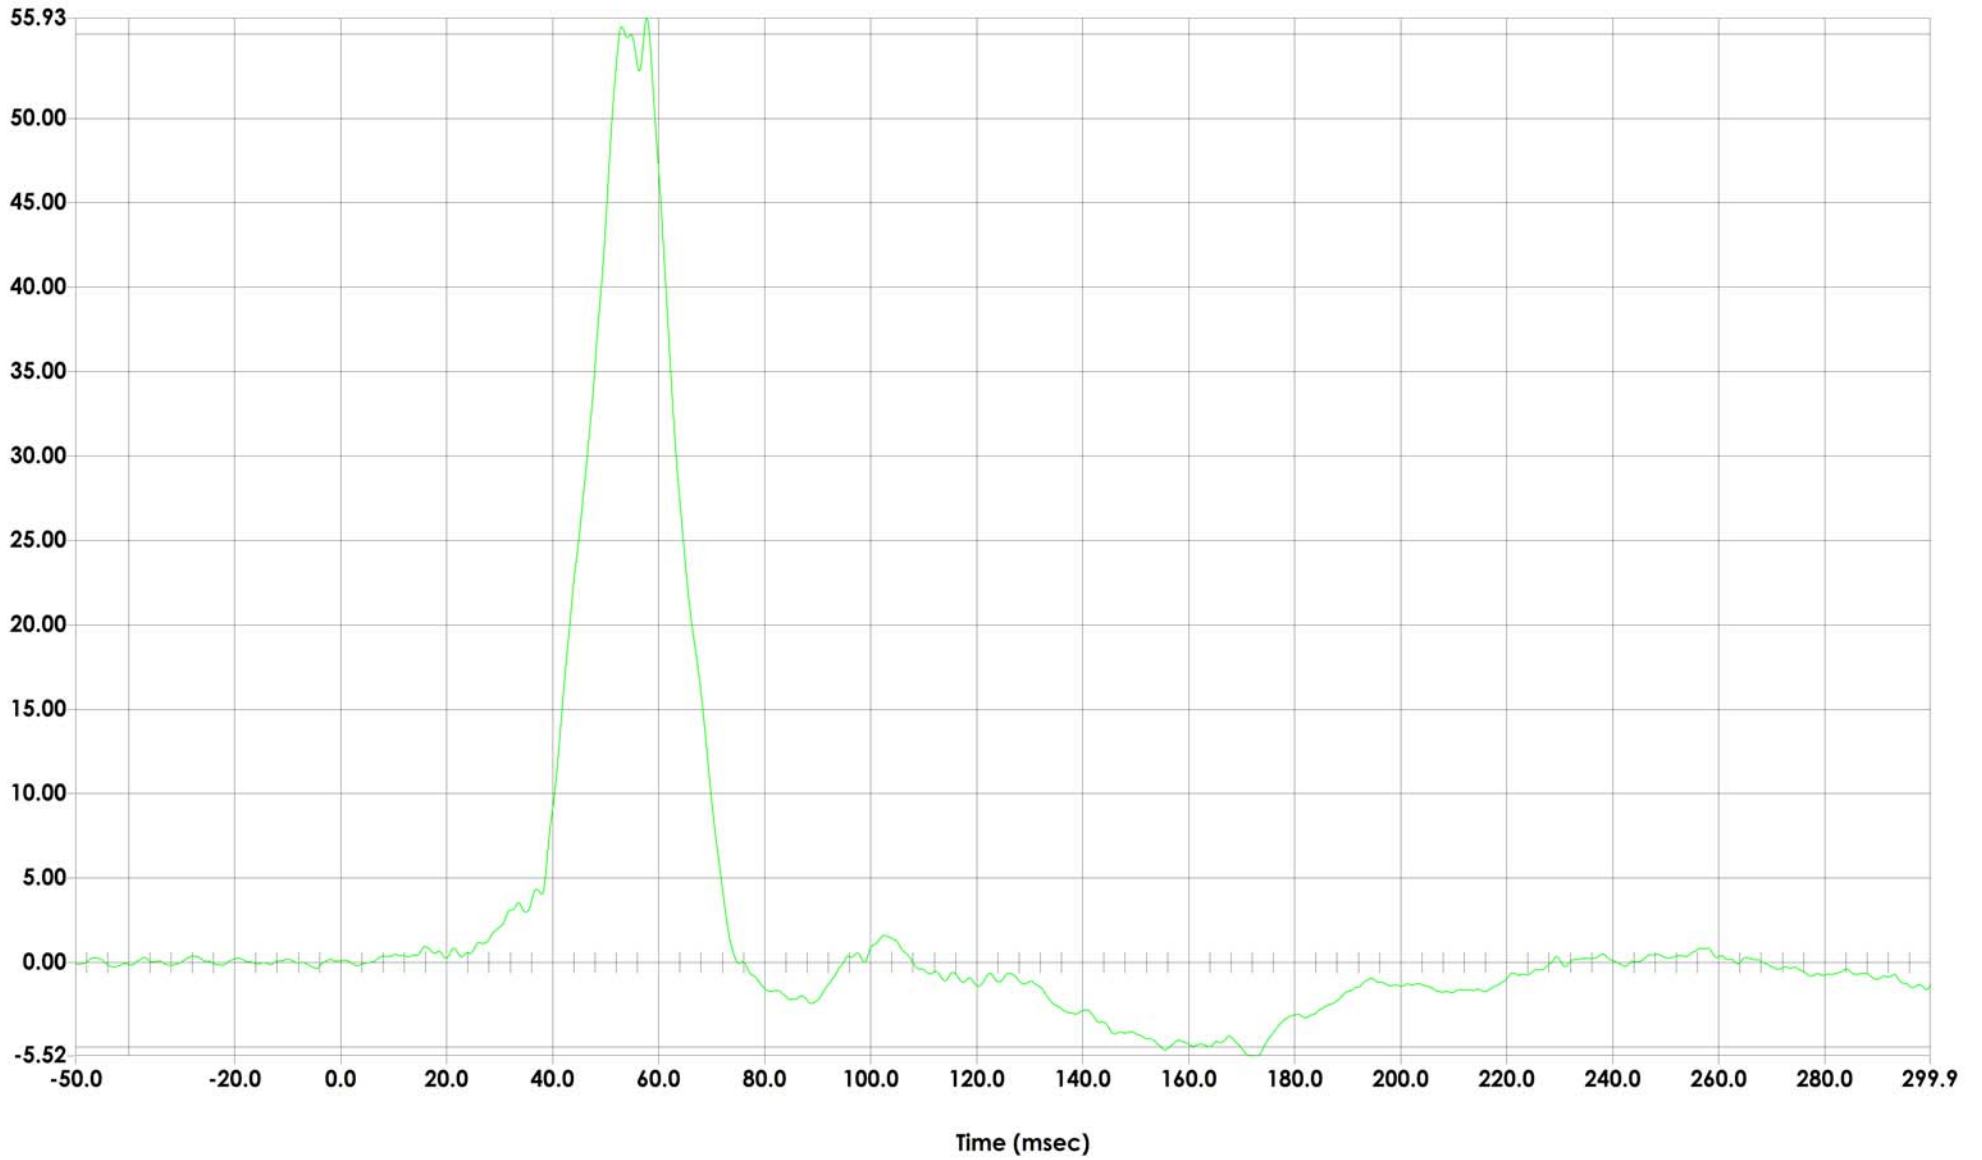


Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC180
Plot number	030
Units	G'S

Max	6.99	G'S
	171.60	msec
Min	-10.16	G'S
	47.76	msec



Passenger Lower Spine T12 Acceleration (Z) vs. Time

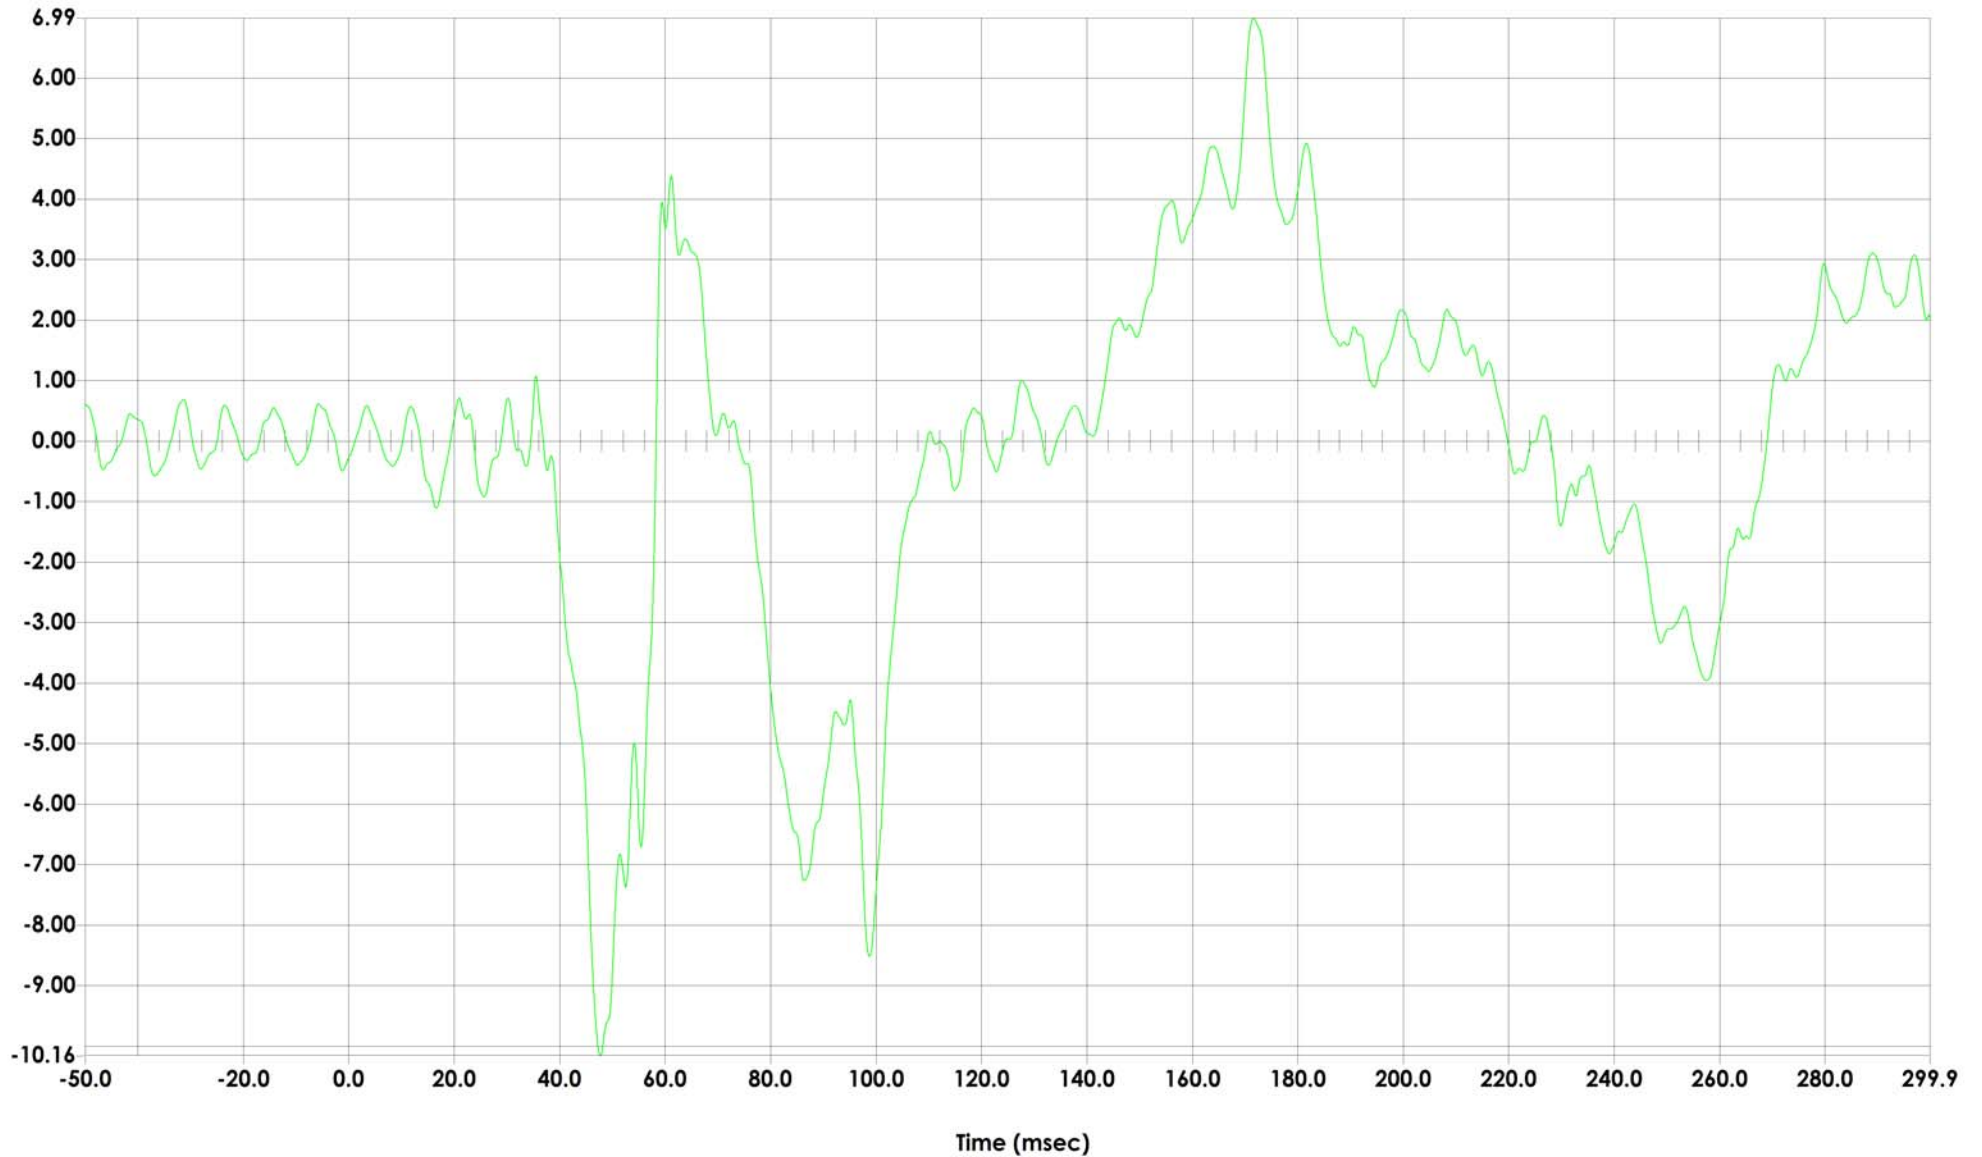


Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC180
Plot number	058
Units	G'S

Max	57.83	G'S
	52.96	msec
Min	0.04	G'S
	-33.68	msec



Passenger Lower Spine T12 Resultant Acceleration vs. Time

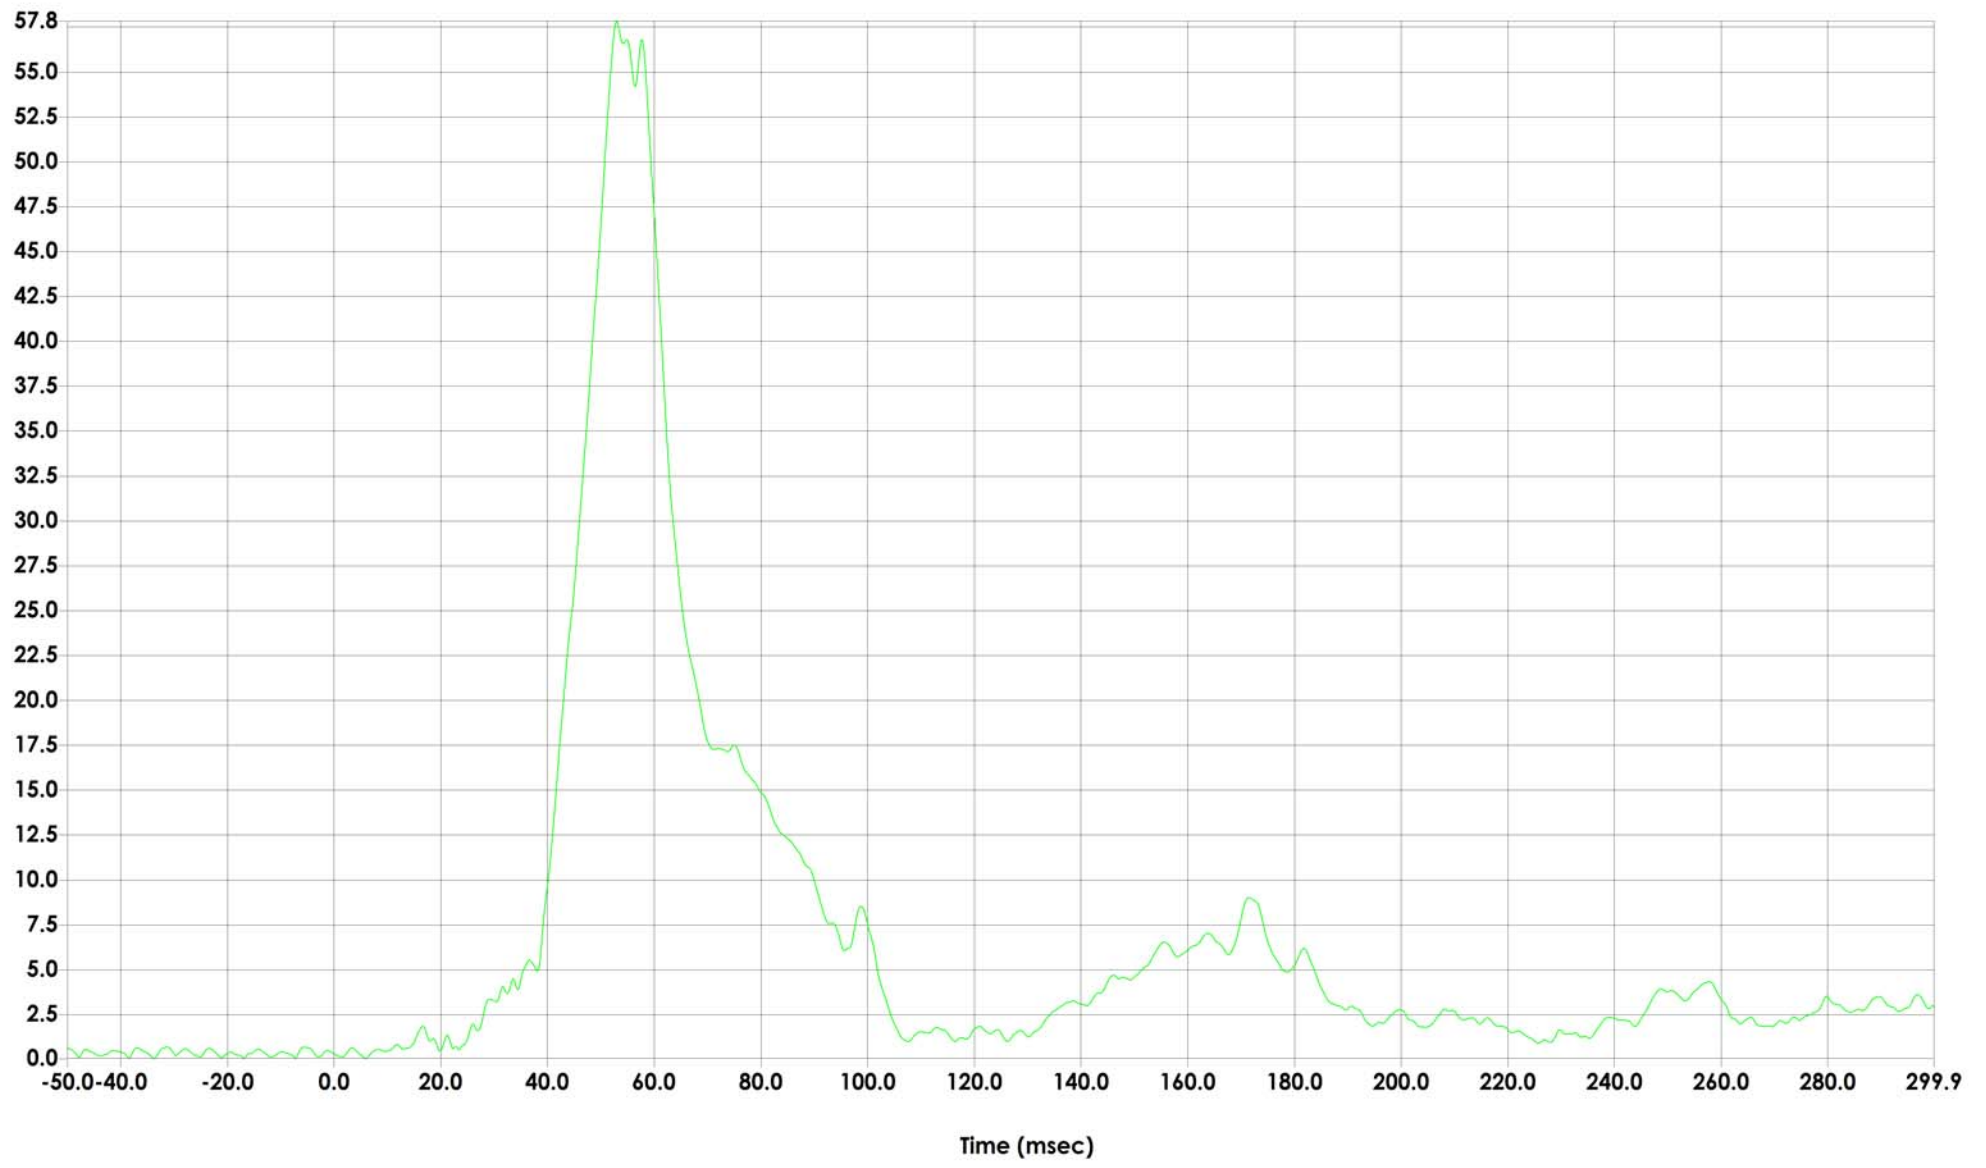


Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC600
Plot number	031
Units	NWT

Max	941.48	NWT
	56.96	msec
Min	-170.93	NWT
	70.16	msec



Passenger Iliac Wing Force on Impact Side vs. Time

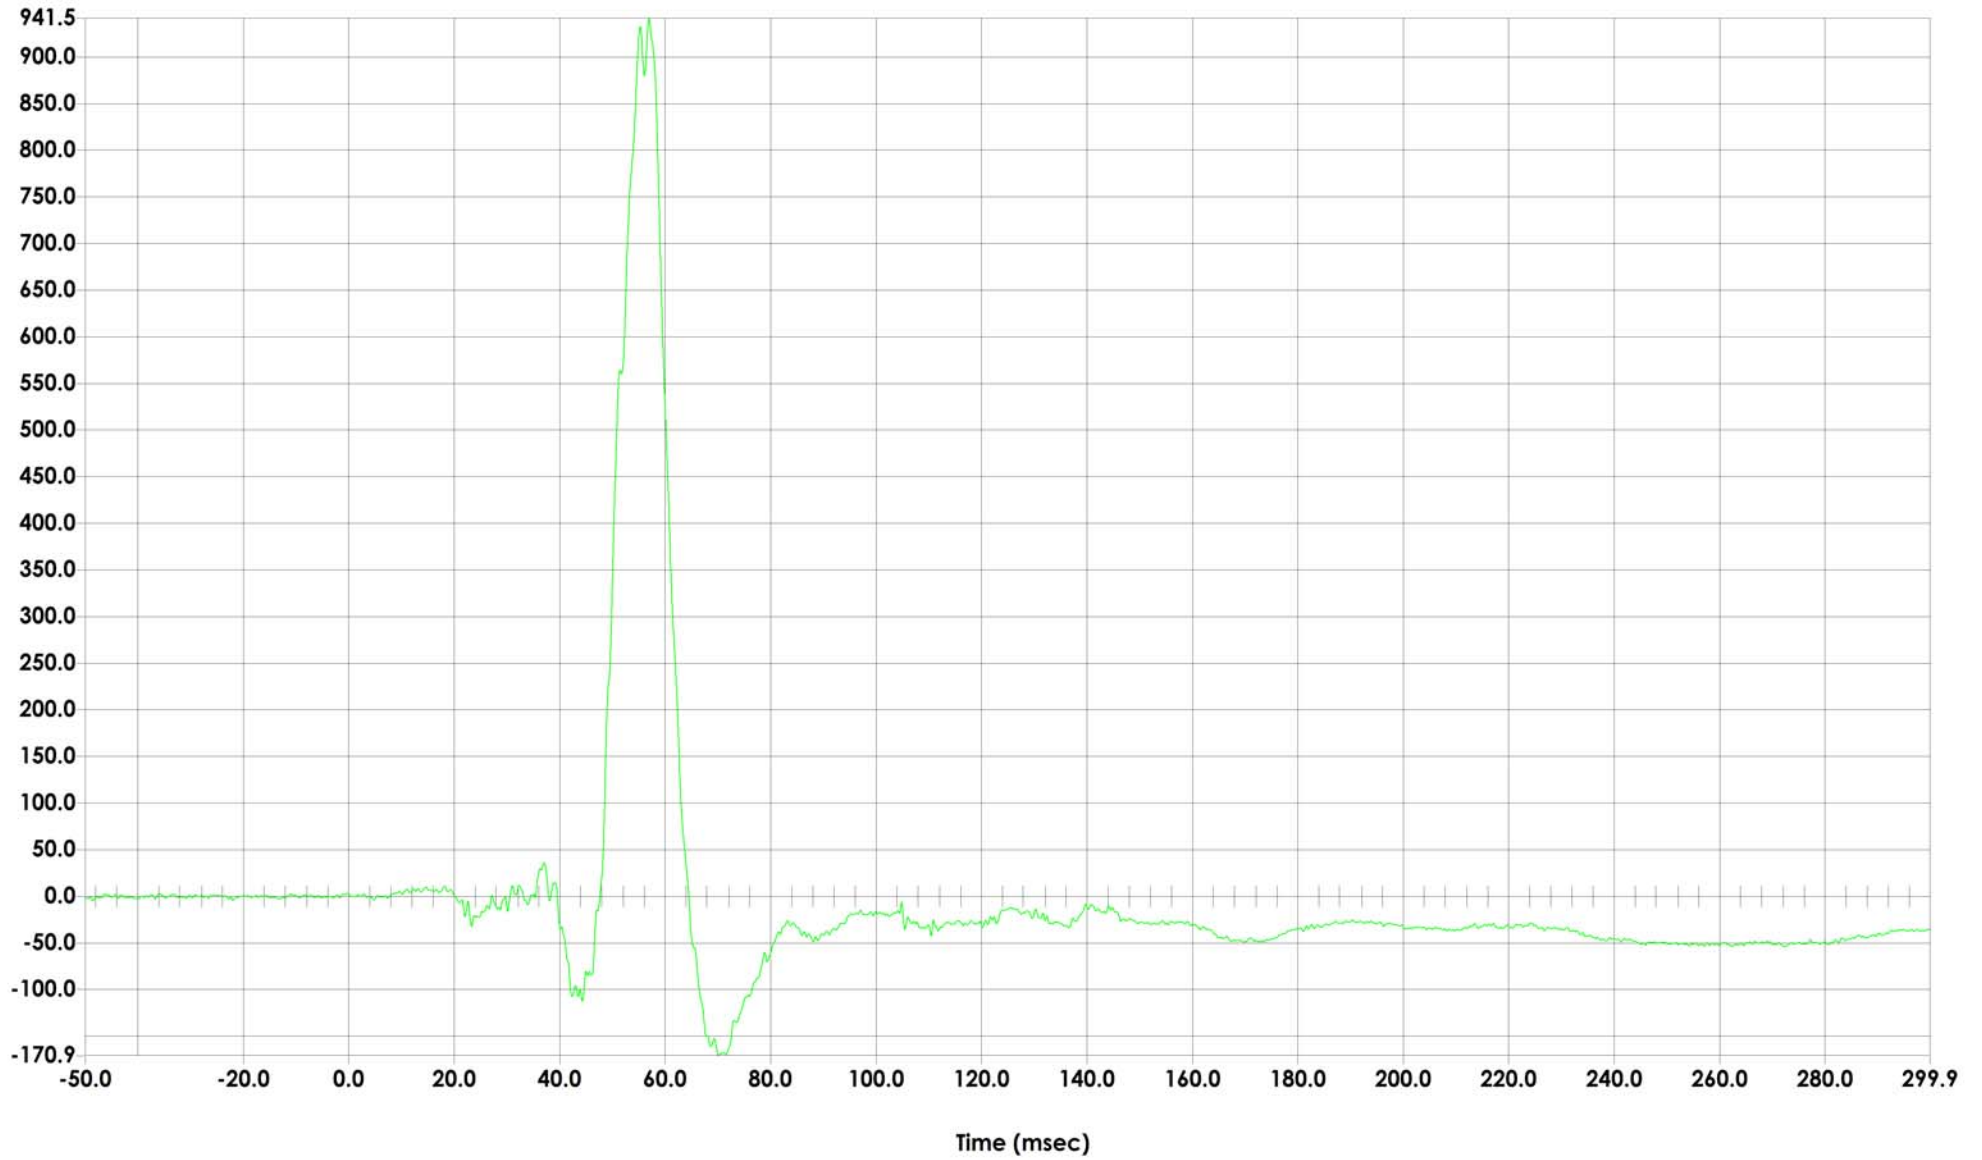


Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC600
Plot number	032
Units	NWT

Max	2879.12	NWT
	49.28	msec
Min	-10.88	NWT
	146.80	msec



Passenger Acetabulum Force on Impact Side vs. Time

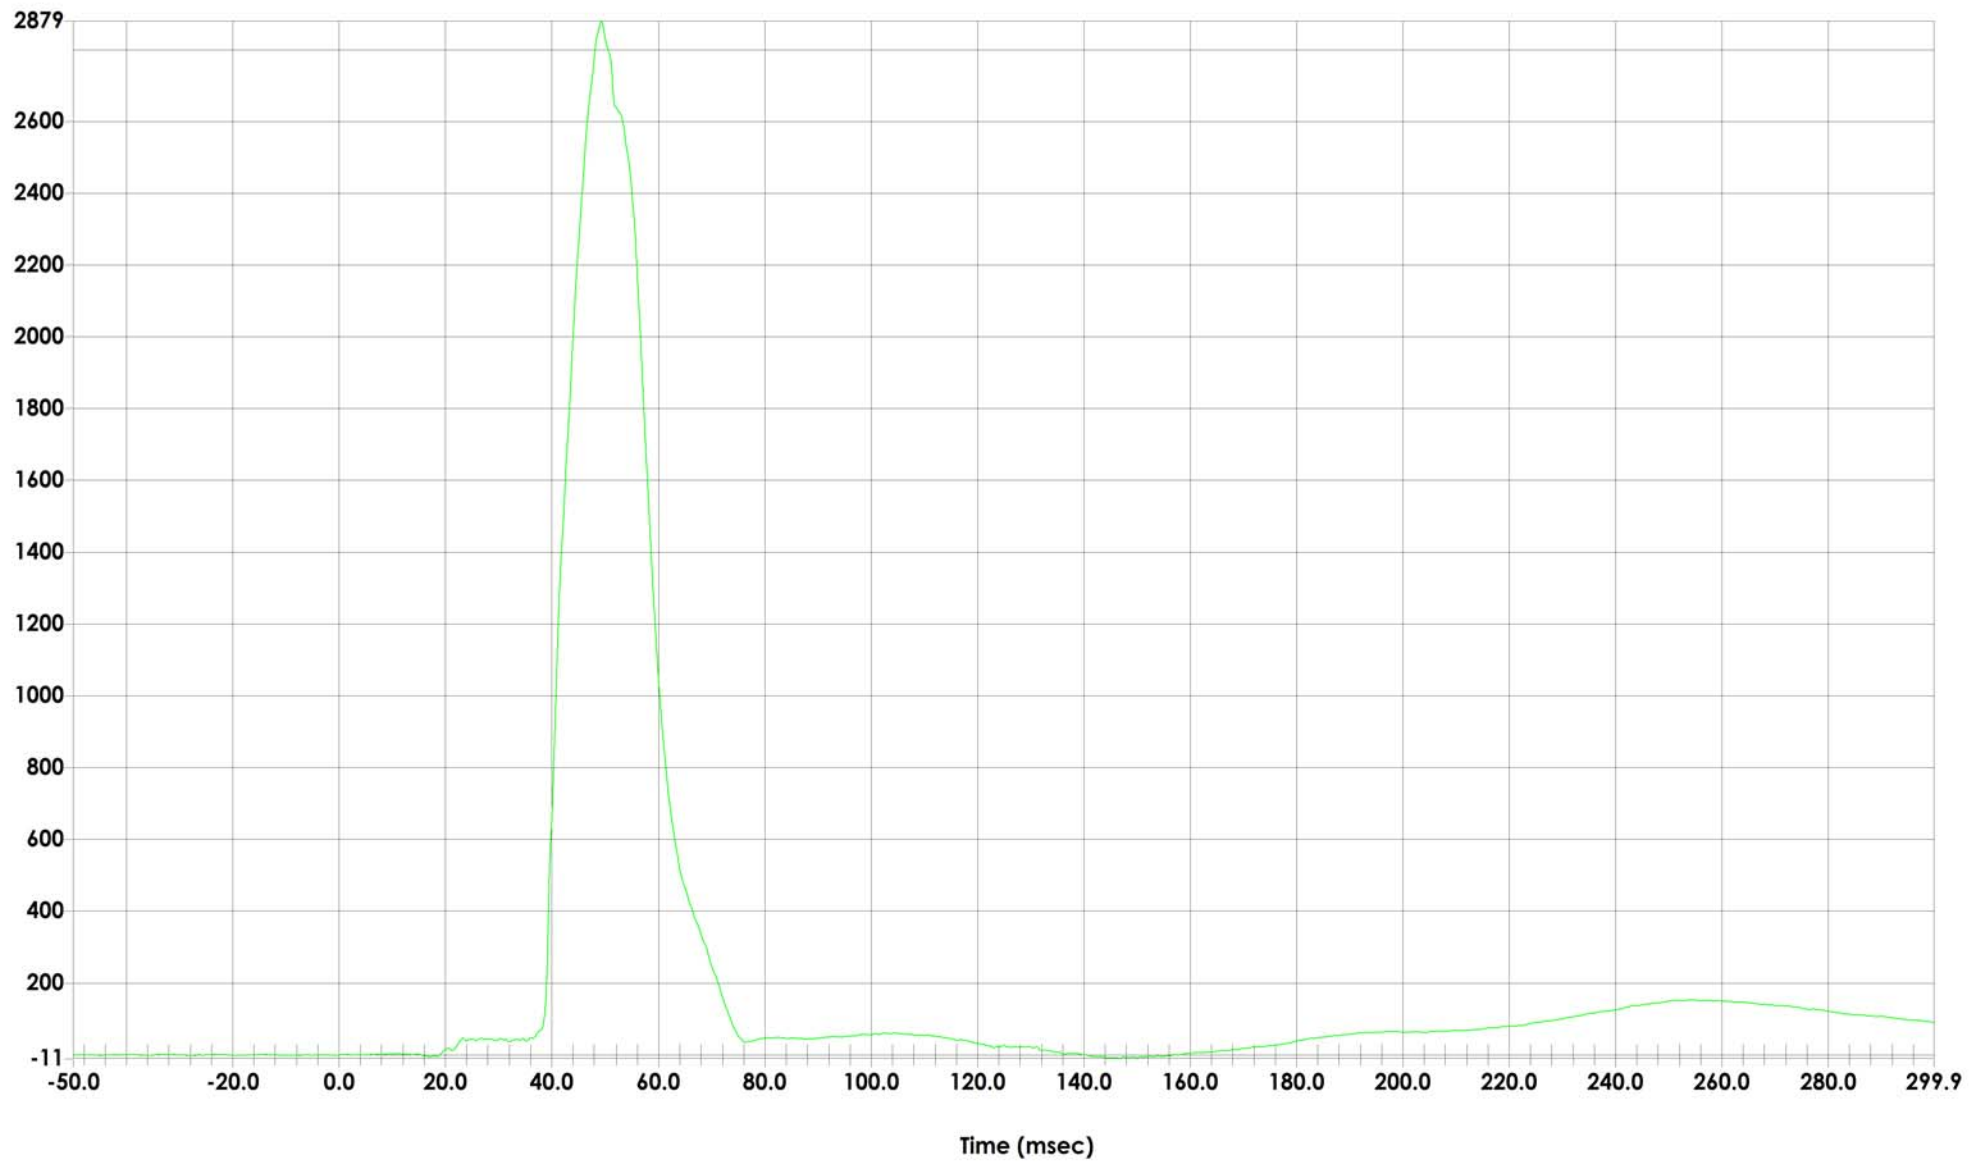


Test ID	M20140308
Sampling Rate (Hz)	12500
Filter	CFC600
Plot number	059
Units	NWT

Max	3357.28	NWT
	53.36	msec
Min	-70.71	NWT
	76.08	msec



Passenger Total Pelvic Force on Impact Side (Y) vs. Time

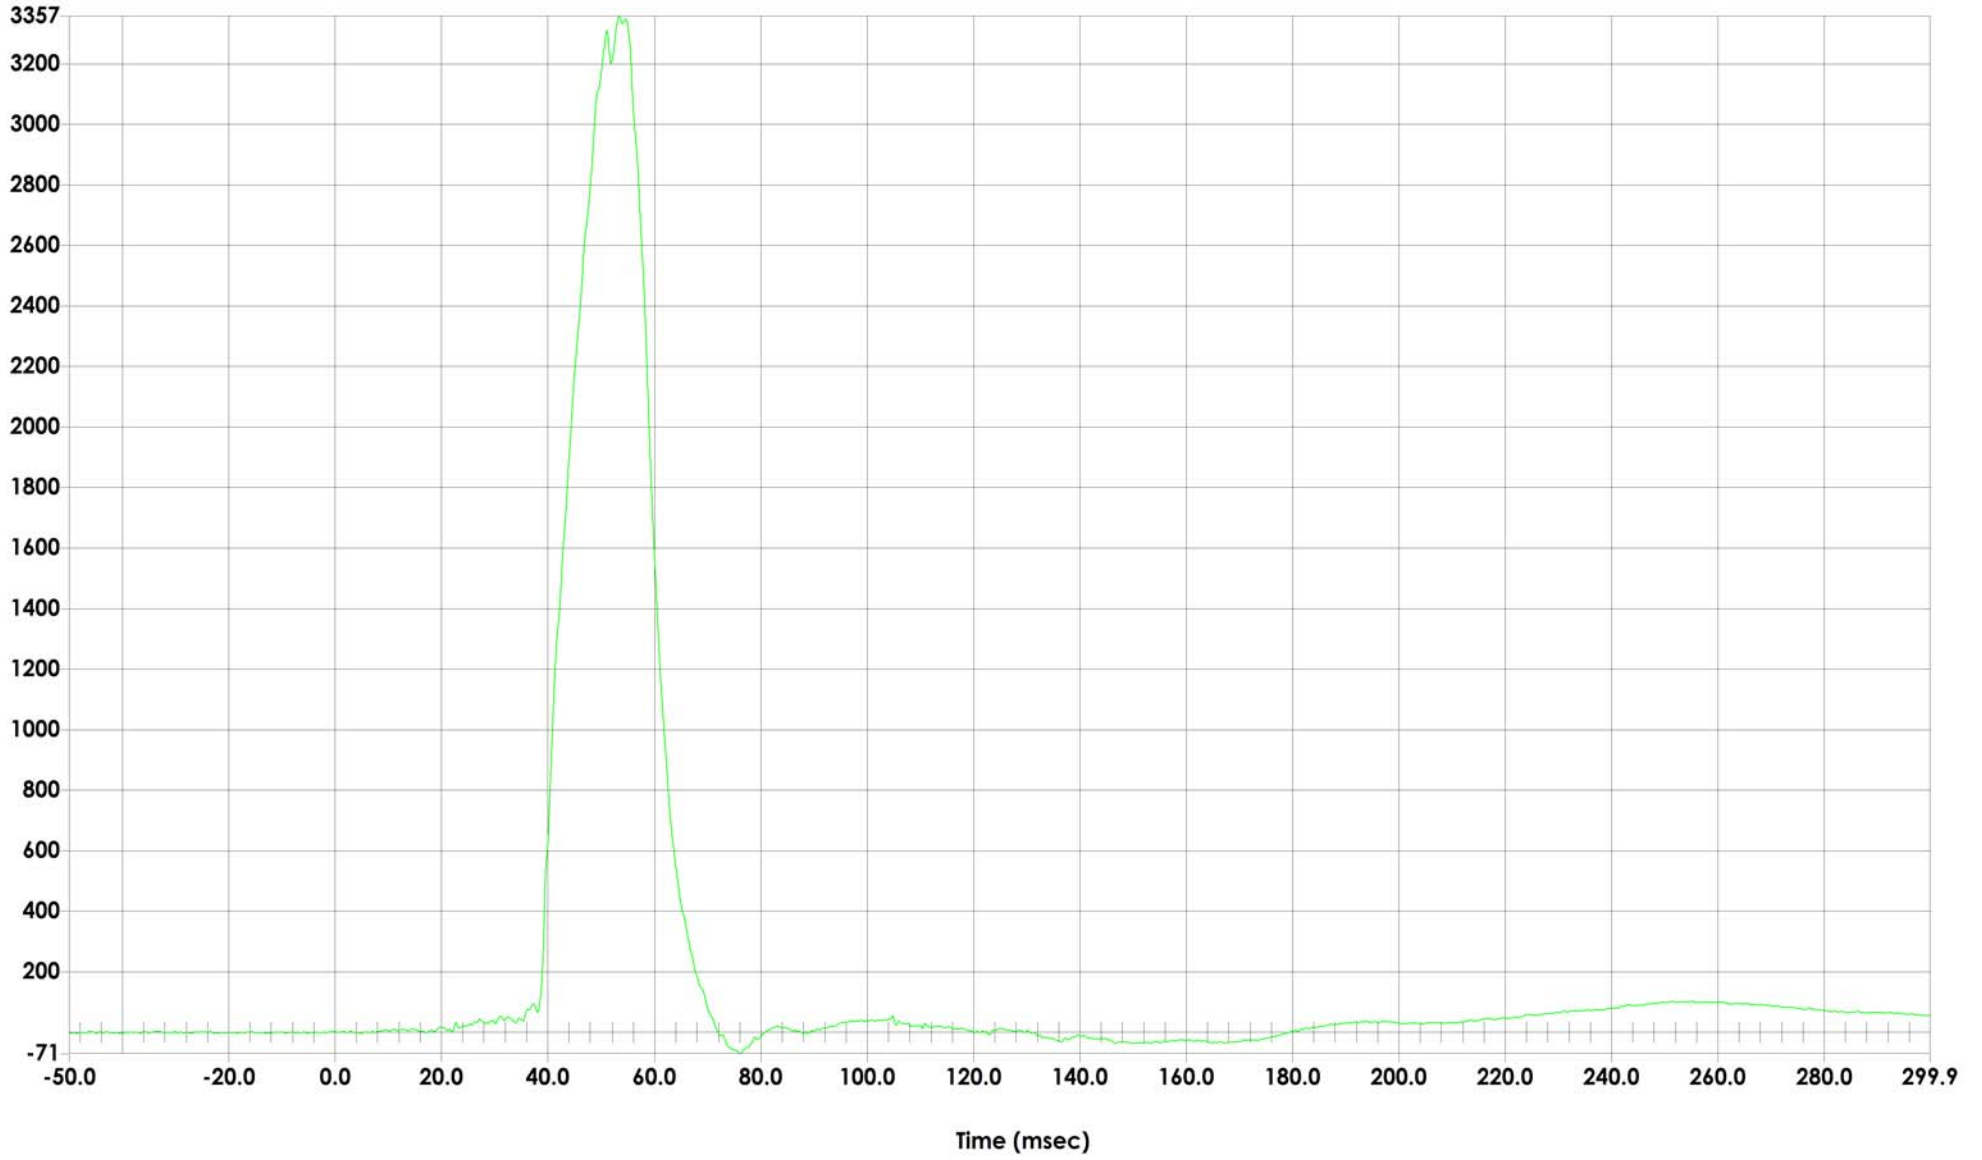

Test Vehicle: 2014 Jeep Patriot 5-Door SUV
Test Program: SINCAP

NHTSA Number: M20140308
Test Date: November 13, 2013

APPENDIX C
DUMMY CONFIGURATION AND PERFORMANCE DATA

TABLE 1
EXTERNAL MEASUREMENTS (ES-IIre)

ES-IIre Serial Number F038 Test Sequences 1 & 2

TEST PARAMETER	SPEC.	PRE		POST	
Date	-	11-11-13		11-18-13	
Sequential Test Number	-	1		2	
		Result	Pass/Fail	Result	Pass/Fail
Temperature (°C)	20.6-22.2	21.1	Pass	21.0	Pass
Relative Humidity (%)	10-70	31.2	Pass	33.2	Pass
Sitting Height	900 - 918	913	Pass	912	Pass
Seat to Shoulder Joint	558 -572	563	Pass	564	Pass
Seat to Lower Face of Thoracic Spine Box	346 -356	353	Pass	355	Pass
Seat to Hip Joint (Center of Bolt)	97 - 103	100	Pass	100	Pass
Sole to Seat, Sitting	433 - 451	440	Pass	440	Pass
Head Width	152 -158	156	Pass	155	Pass
Shoulder/Arm Width	461 - 479	474	Pass	476	Pass
Thorax Width	322 - 332	325	Pass	323	Pass
Abdomen Width	273 - 287	281	Pass	281	Pass
Pelvis/Lap Width	359 - 373	363	Pass	364	Pass
Head Depth	196 - 206	200	Pass	201	Pass
Thorax Depth	262 - 272	270	Pass	270	Pass
Abdomen Depth	194 - 204	201	Pass	201	Pass
Pelvis Depth	235 - 245	238	Pass	242	Pass
Back of Buttocks to Hip Joint (Center of Bolt)	150 - 160	156	Pass	154	Pass
Back of Buttocks to Front Knee	597 - 615	607	Pass	610	Pass


TABLE 2
HEAD DROP TEST (ES-IIre)

ES-IIre Serial Number F038 Test Sequences 1 & 2

TEST PARAMETER	SPEC.	PRE		POST	
Date	-	11-8-13		11-16-13	
Sequential Test Number	-	1		2	
		Result	Pass/Fail	Result	Pass/Fail
Head Assembly Soak Time (min)	≥ 240	240	Pass	240	Pass
Temperature (°C) – During Soak	20.6-22.2	Max	20.8	21.1	Pass
		Min	20.7	20.7	Pass
Humidity (%) – During Soak	10.0-70.0	Max	32.6	30.2	Pass
		Min	31.1	29.1	Pass
Temperature – During Test (°C)	20.6-22.2	20.8	Pass	21.1	Pass
Humidity – During Test (%)	10-70	32.6	Pass	30.2	Pass
Peak Head Resultant Acceleration (G)	125-155	145	Pass	152.3	Pass
Peak Head X Acceleration (G)	<15	4.6	Pass	5.3	Pass
Unimodal (Oscillation) (Yes/No)	<15%	Yes	Pass	Yes	Pass

TABLE 2
HEAD DROP TEST (ES-IIre) (CONTINUED)

PRE-TEST

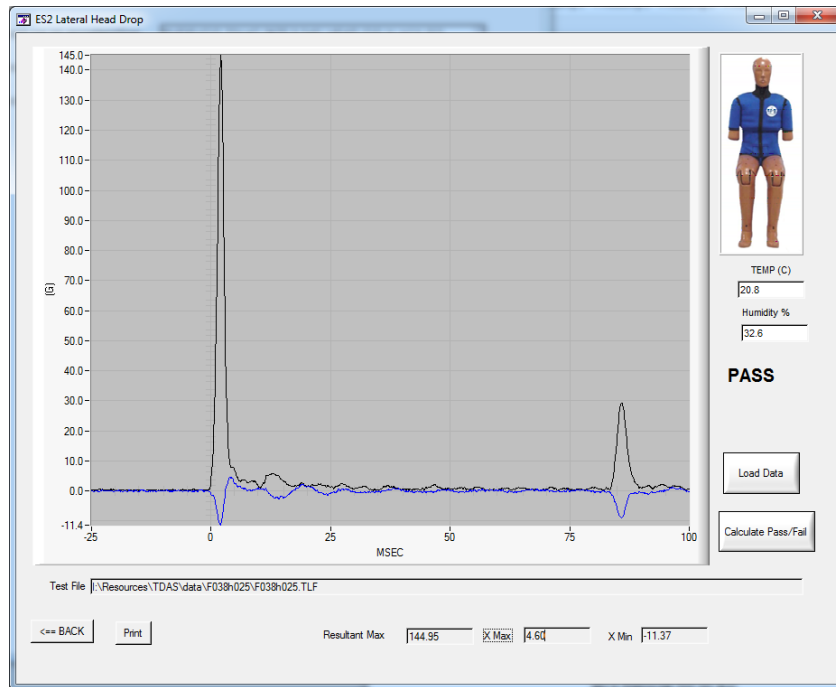

POST-TEST

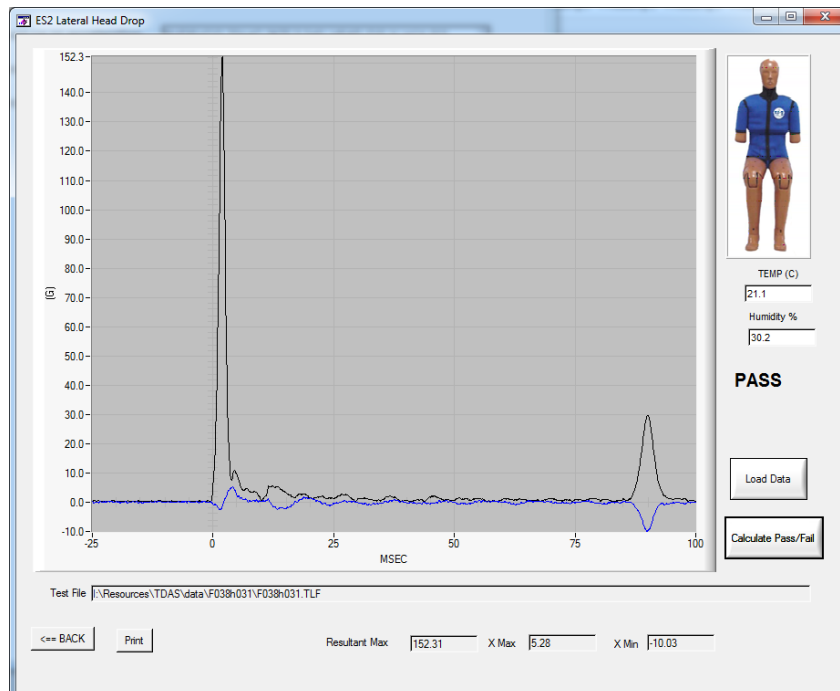



TABLE 3
NECK PENDULUM TEST (ES-IIre)

ES-IIre Serial Number F038 Test Sequences 1 & 2

TEST PARAMETER		SPEC.	PRE		POST	
Date		-	11-4-13		11-16-13	
Sequential Test Number		-	1		2	
			Result	Pass/Fail	Result	Pass/Fail
Neck Assembly Soak Time (min)		≥ 240	240	Pass	240	Pass
Temperature (°C) – During Soak	Max	20.6-22.2	21.5	Pass	21.9	Pass
	Min		20.8	Pass	20.8	Pass
Humidity (%) – During Soak	Max	10.0-70.0	37.4	Pass	32.6	Pass
	Min		31.0	Pass	32.0	Pass
Temperature – During Test (°C)		20.6-22.2	21.5	Pass	21.9	Pass
Humidity – During Test (%)		10-70	37.4	Pass	32.6	Pass
Pendulum Velocity (m/s)		3.3-3.5	3.45	Pass	3.45	Pass
Pendulum Velocity Corridors (m/s)	0-1.0 ms	(-0.05)-0.00	-0.05	Pass	-0.05	Pass
	2.5-3.0 ms	(-0.375) - (-0.25)	-0.34	Pass	-0.34	Pass
	13.5-14.0 ms	(-3.7) - (-3.20)	-3.5	Pass	-3.5	Pass
	Max > 17 ms	-3.7	-3.7	Pass	-3.7	Pass
Max D-Plane rotation (deg)		49-59	54.9	Pass	53.1	Pass
Time of Max D-Plane Rotation (ms)		54-66	59.3	Pass	59.0	Pass
Time of Moment Decay from Peak to 0 Nm (ms)		53-88	58.9	Pass	58.4	Pass

TABLE 3
NECK PENDULUM TEST (ES-IIre) (CONTINUED)

PRE-TEST

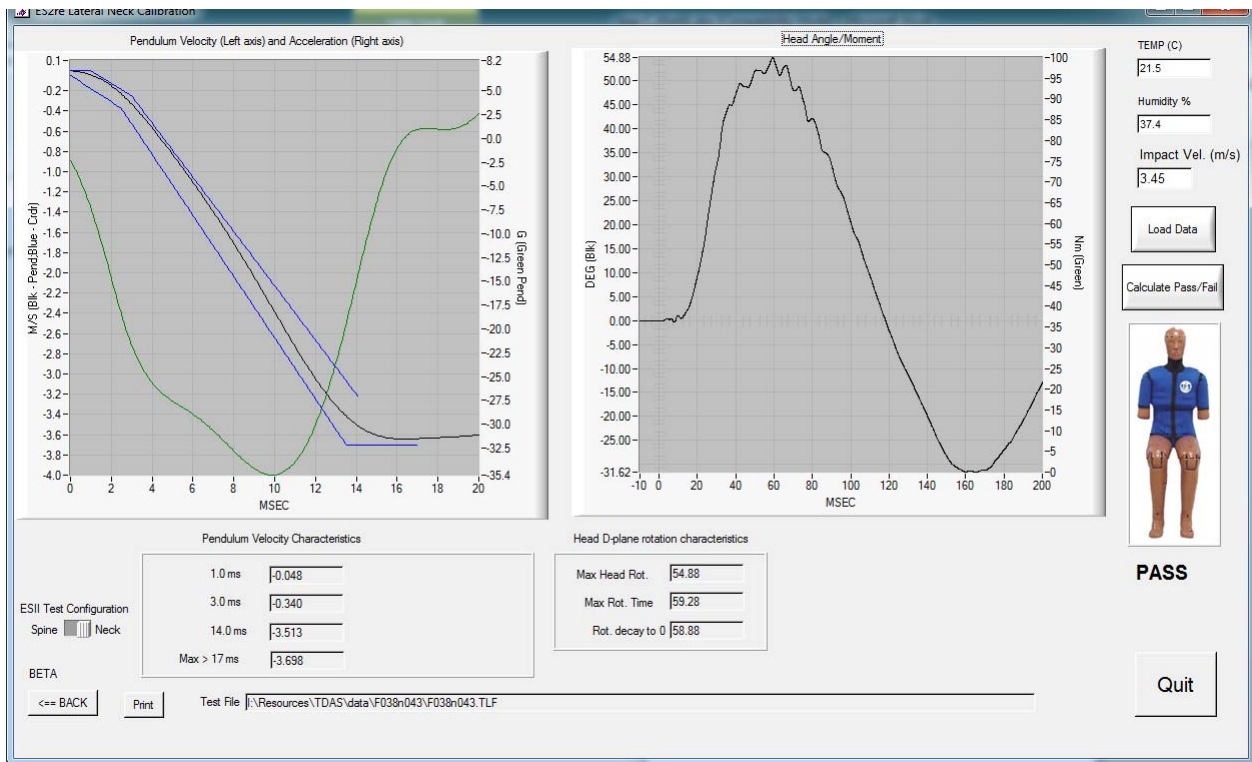

POST-TEST

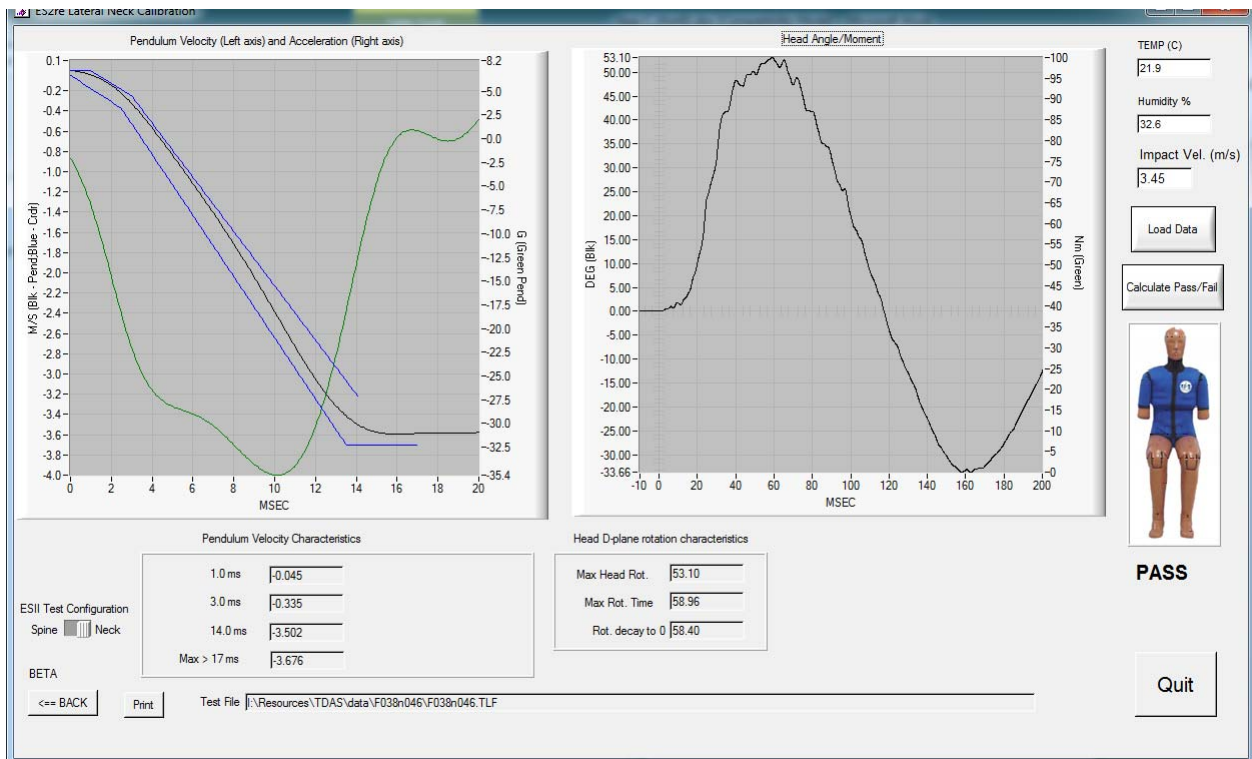



TABLE 4
SHOULDER IMPACT TEST (ES-IIre)

ES-IIre Serial Number F038 Test Sequences 1 & 2

TEST PARAMETER		SPEC.	PRE		POST	
Date		-	11-9-13		11-18-13	
Sequential Test Number		-	1		2	
			Result	Pass/Fail	Result	Pass/Fail
Dummy Soak Time (min)		≥ 240	240	Pass	240	Pass
Temperature (°C) – During Soak	Max	20.6-22.2	20.8	Pass	21.0	Pass
	Min		20.6	Pass	20.7	Pass
Humidity (%) – During Soak	Max	10.0-70.0	32.6	Pass	33.5	Pass
	Min		30.4	Pass	29.1	Pass
Temperature – During Test (°C)		20.6-22.2	20.8	Pass	21.0	Pass
Humidity – During Test (%)		10-70	32.6	Pass	33.5	Pass
Pendulum Velocity (m/s)		4.2-4.4	4.31	Pass	4.31	Pass
Peak Impactor Acceleration (G)		7.5-10.5	7.8	Pass	7.9	Pass

TABLE 4
SHOULDER IMPACT TEST (ES-IIre) (CONTINUED)

PRE-TEST

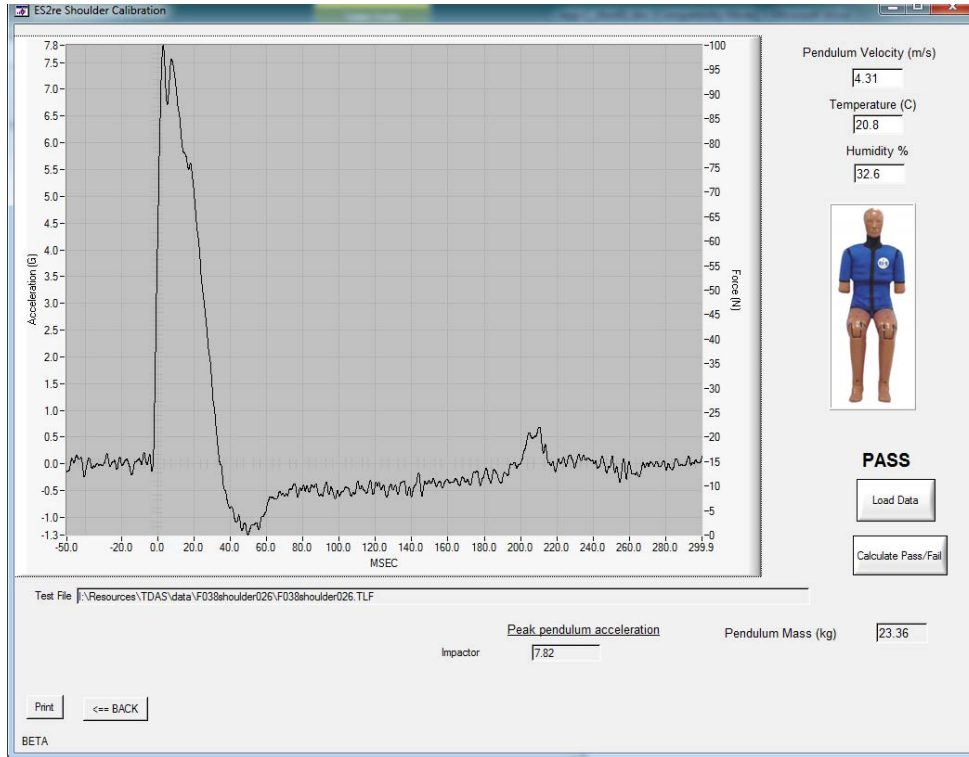

POST-TEST

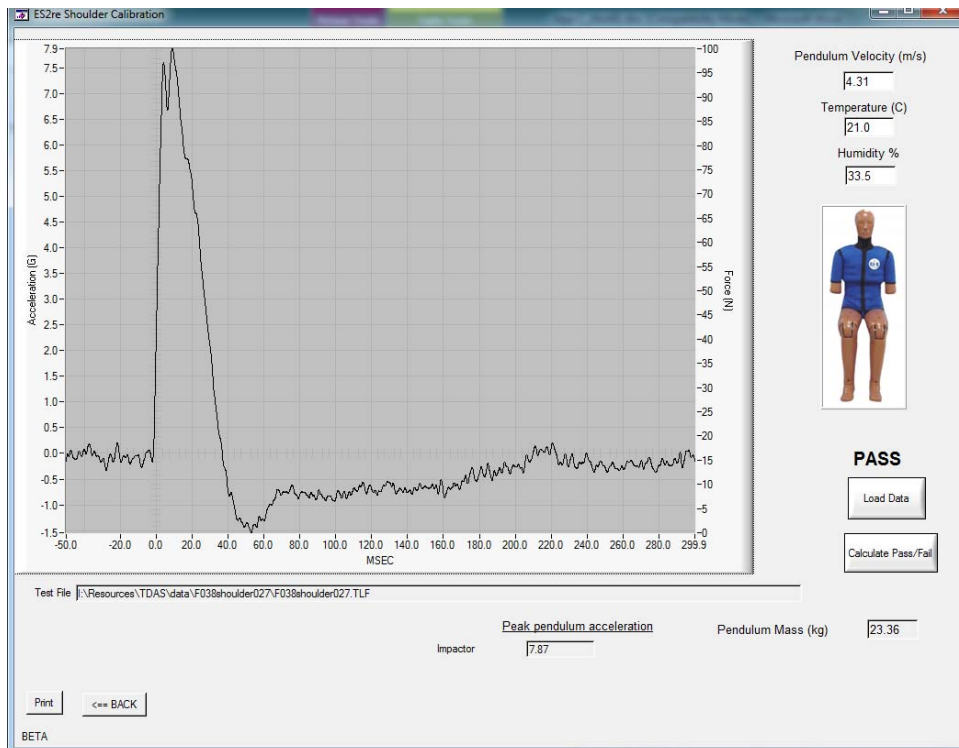



TABLE 5
THORAX – UPPER RIB DROP TEST (ES-IIre)

ES-IIre Serial Number F038 Test Sequences 1 & 2

TEST PARAMETER	SPEC.	PRE		POST	
Date	-	11-4-13		11-16-13	
Sequential Test Number	-	1		2	
		Result	Pass/Fail	Result	Pass/Fail
Upper Rib Drop Module Soak Time (min)	≥ 240	240	Pass	240	Pass
Temperature (°C) – During Soak	20.6-22.2	Max	21.0	22.0	Pass
		Min	20.8	20.9	Pass
Humidity (%) – During Soak	10.0-70.0	Max	29.6	30.7	Pass
		Min	28.5	28.1	Pass
Temperature – During Test (°C)	20.6-22.2	21.0	Pass	22.0	Pass
Humidity – During Test (%)	10-70	29.6	Pass	30.7	Pass
1 st Test - Drop Height 459 ± 5 mm	36-40	37.8	Pass	37.8	Pass
2 nd Test - Drop Height 815 ± 5 mm	46-51	49.1	Pass	49.2	Pass

TABLE 5
THORAX – UPPER RIB DROP TEST (ES-IIre) (CONTINUED)
3.00 m/s

PRE-TEST

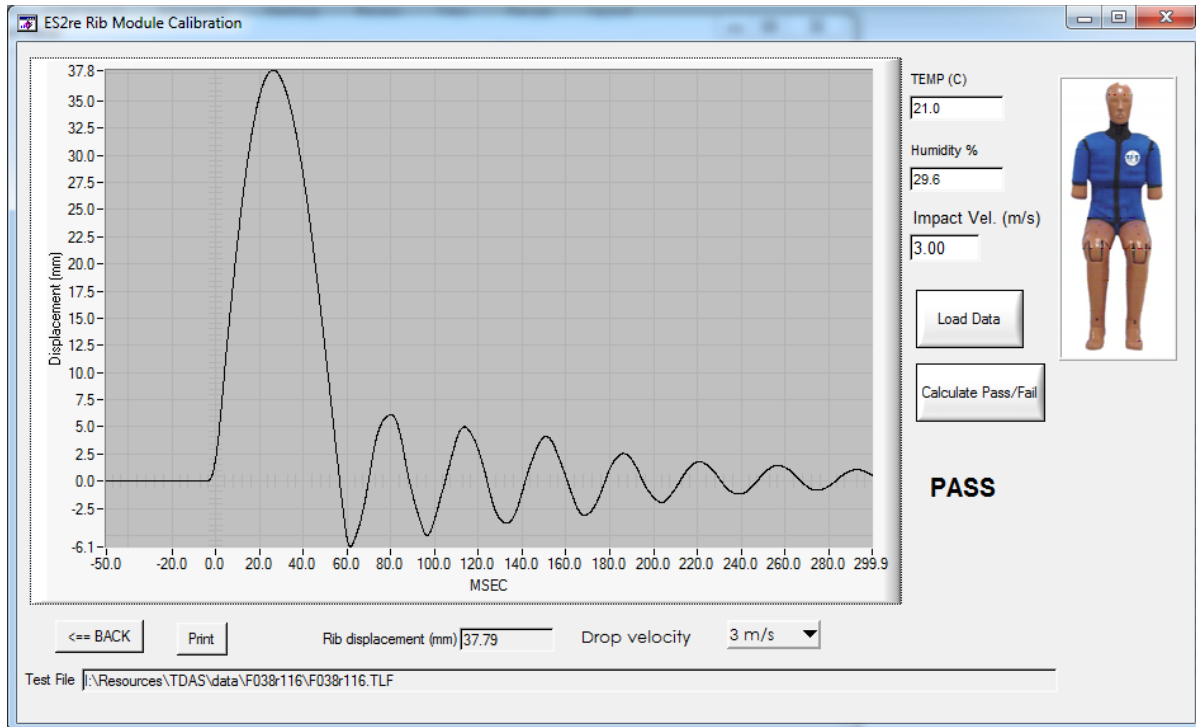

POST-TEST


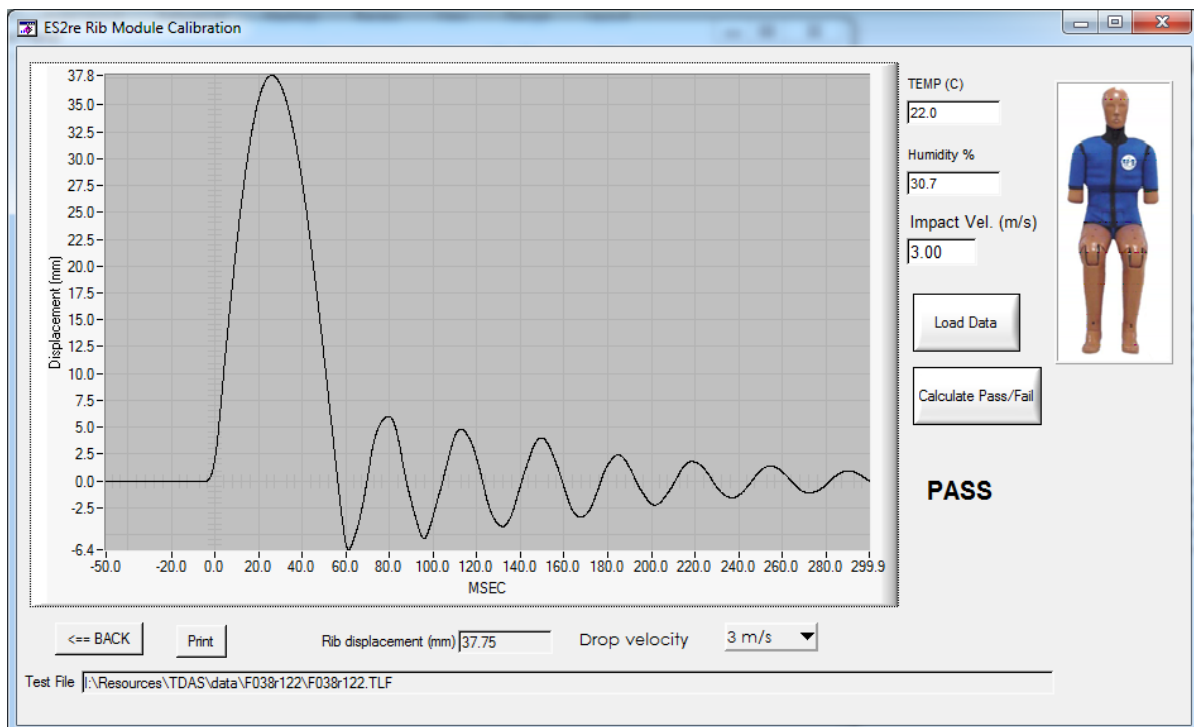


TABLE 5
THORAX – UPPER RIB DROP TEST (ES-IIre) (CONTINUED)
4.00 m/s

PRE-TEST

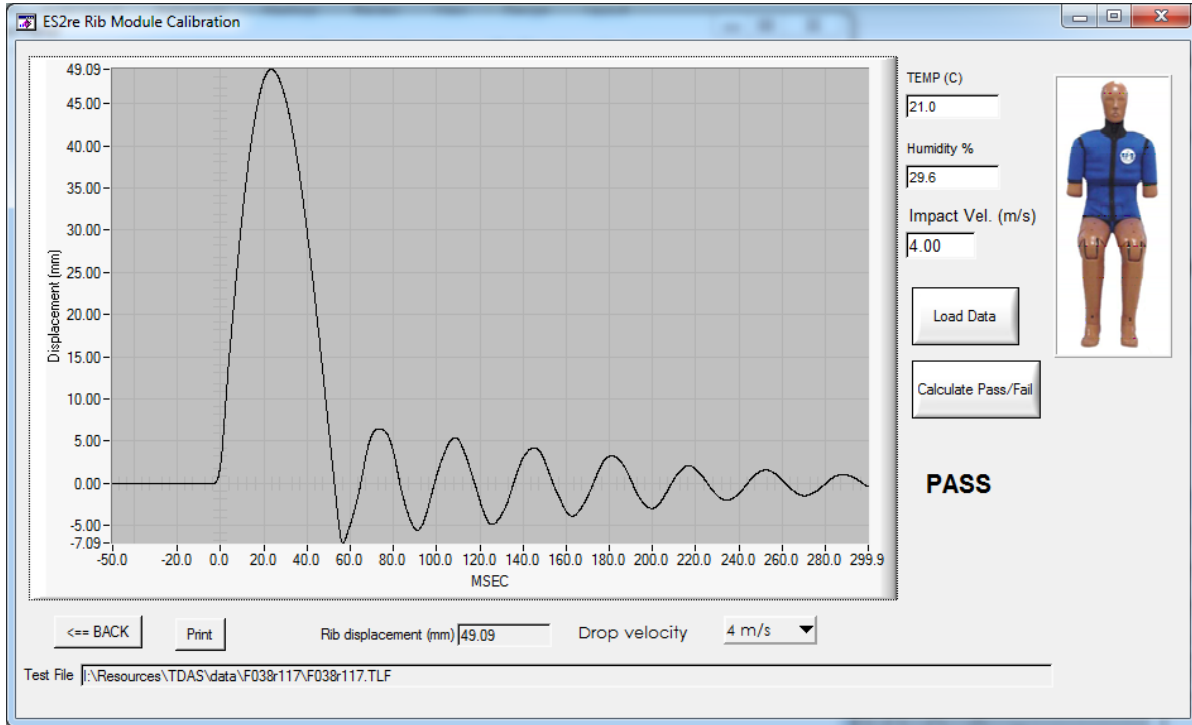

POST-TEST

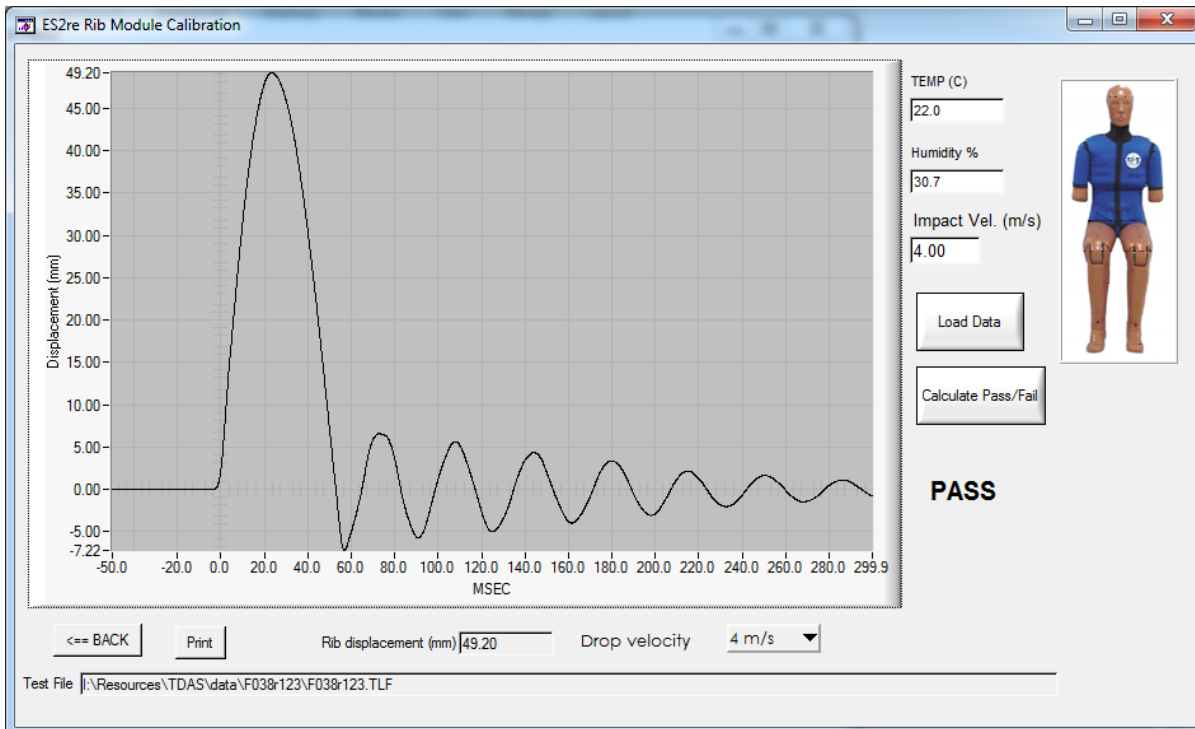



TABLE 6
THORAX – MIDDLE RIB DROP TEST (ES-IIre)

ES-IIre Serial Number F038 Test Sequences 1 & 2

TEST PARAMETER		SPEC.	PRE		POST	
Date		-	11-4-13		11-16-13	
Sequential Test Number		-	1		2	
			Result	Pass/Fail	Result	Pass/Fail
Middle Rib Drop Module Soak Time (min)		≥ 240	240	Pass	240	Pass
Temperature (°C) – During Soak	Max	20.6-22.2	21.0	Pass	22.0	Pass
	Min		20.8	Pass	20.9	Pass
Humidity (%) – During Soak	Max	10.0-70.0	29.6	Pass	30.7	Pass
	Min		28.5	Pass	28.1	Pass
Temperature – During Test (°C)		20.6-22.2	21.0	Pass	22.0	Pass
Humidity – During Test (%)		10-70	29.6	Pass	30.7	Pass
1 st Test - Drop Height 459 ± 5 mm		36-40	37.0	Pass	37.1	Pass
2 nd Test - Drop Height 815 ± 5 mm		46-51	48.9	Pass	48.7	Pass

TABLE 6
THORAX – MIDDLE RIB DROP TEST (ES-IIre) (CONTINUED)
3.00 m/s

PRE-TEST

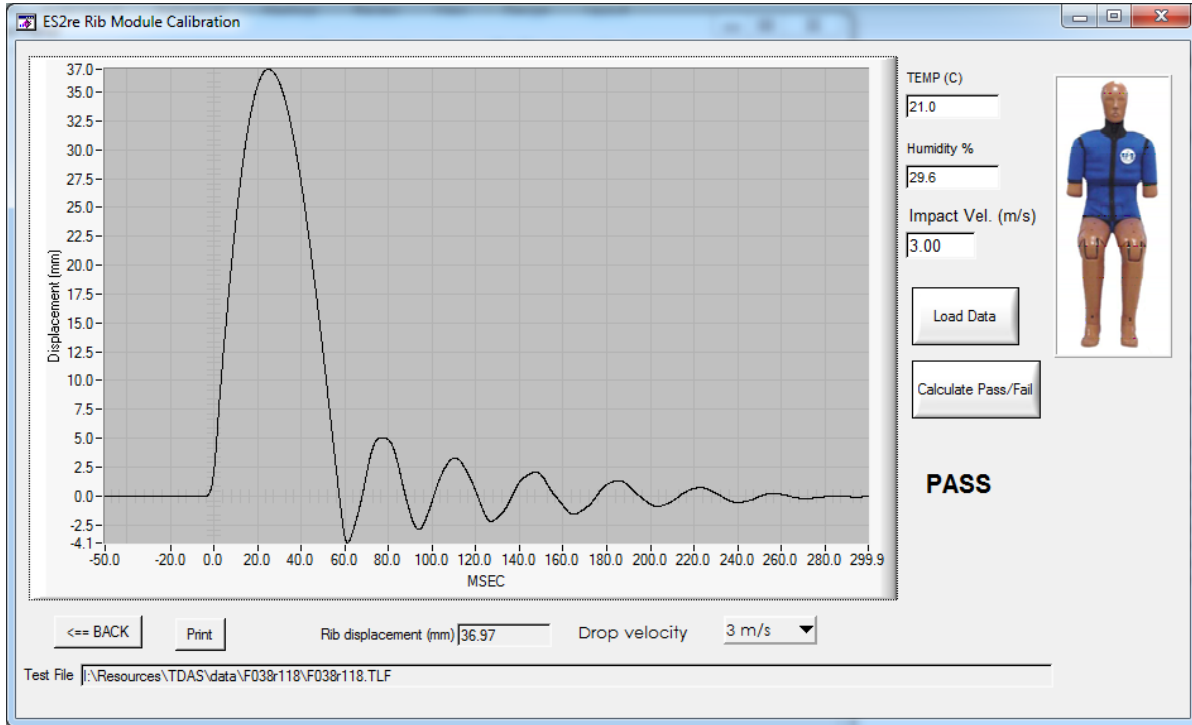

POST-TEST


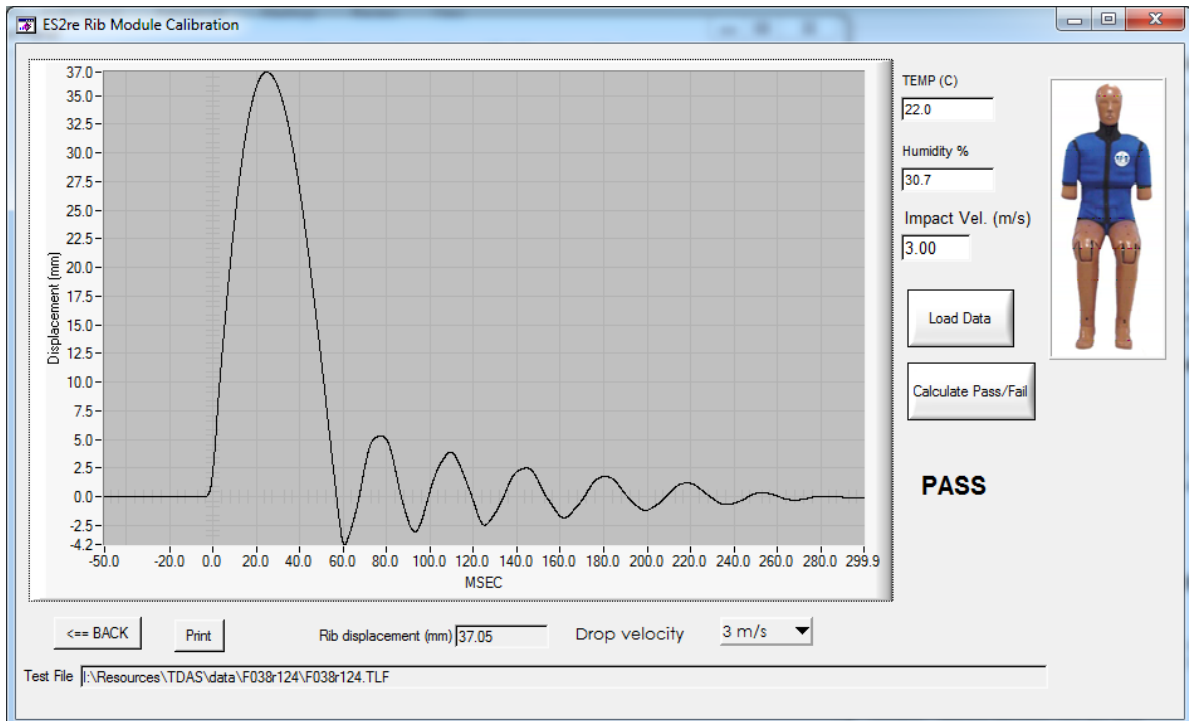


TABLE 6
THORAX – MIDDLE RIB DROP TEST (ES-IIre) (CONTINUED)
4.00 m/s

PRE-TEST

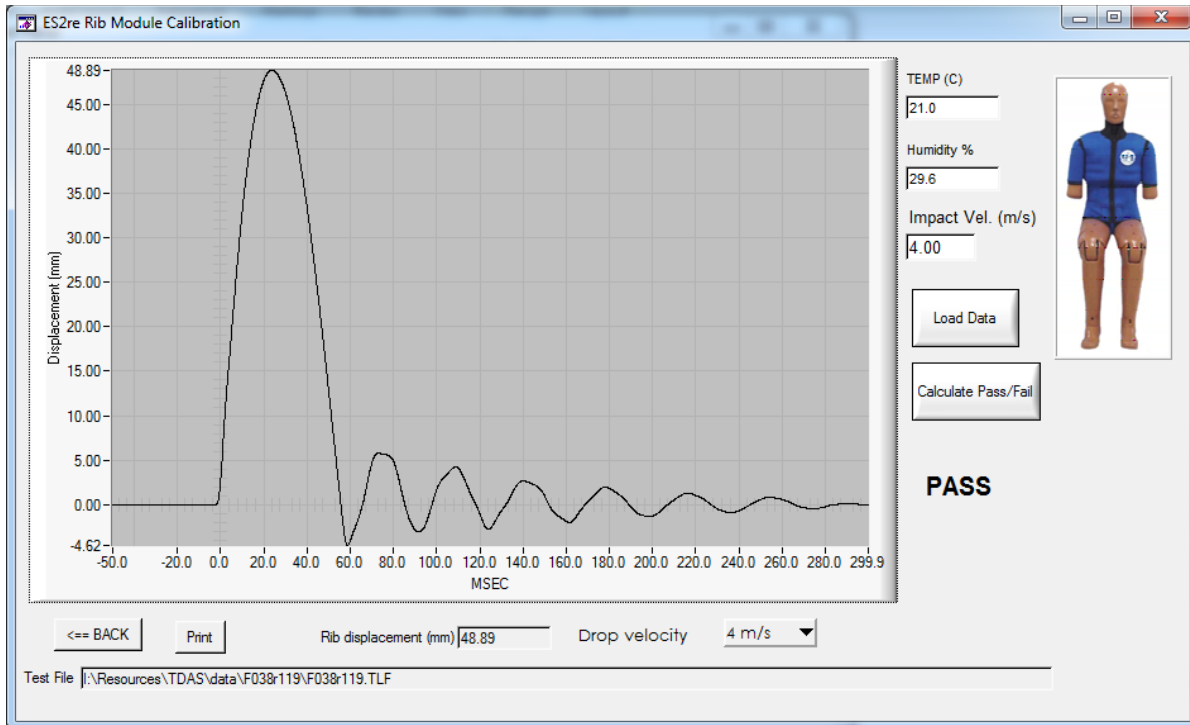

POST-TEST

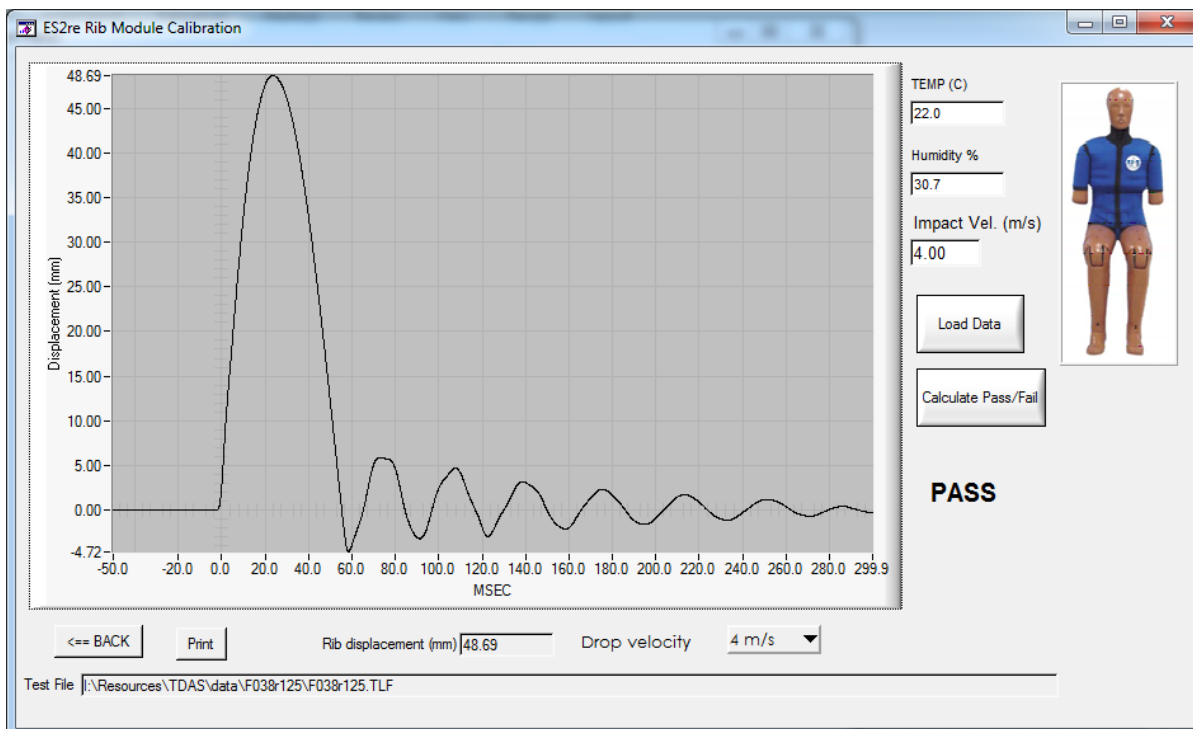



TABLE 7
THORAX – LOWER RIB DROP TEST (ES-IIre)

ES-IIre Serial Number F038 Test Sequences 1 & 2

TEST PARAMETER		SPEC.	PRE		POST	
Date		-	11-4-13		11-16-13	
Sequential Test Number		-	1		2	
			Result	Pass/Fail	Result	Pass/Fail
Lower Rib Drop Module Soak Time (min)		≥ 240	240	Pass	240	Pass
Temperature (°C) – During Soak	Max	20.6-22.2	21.0	Pass	22.0	Pass
	Min		20.8	Pass	20.9	Pass
Humidity (%) – During Soak	Max	10.0-70.0	29.6	Pass	30.7	Pass
	Min		28.5	Pass	28.1	Pass
Temperature – During Test (°C)		20.6-22.2	21.0	Pass	22.0	Pass
Humidity – During Test (%)		10-70	29.6	Pass	30.7	Pass
1 st Test - Drop Height 459 ± 5 mm		36-40	39.4	Pass	38.8	Pass
2nd Test - Drop Height 815 ± 5 mm		46-51	49.8	Pass	49.3	Pass

TABLE 7
THORAX – LOWER RIB DROP TEST (ES-IIre) (CONTINUED)
3.00 m/s

PRE-TEST

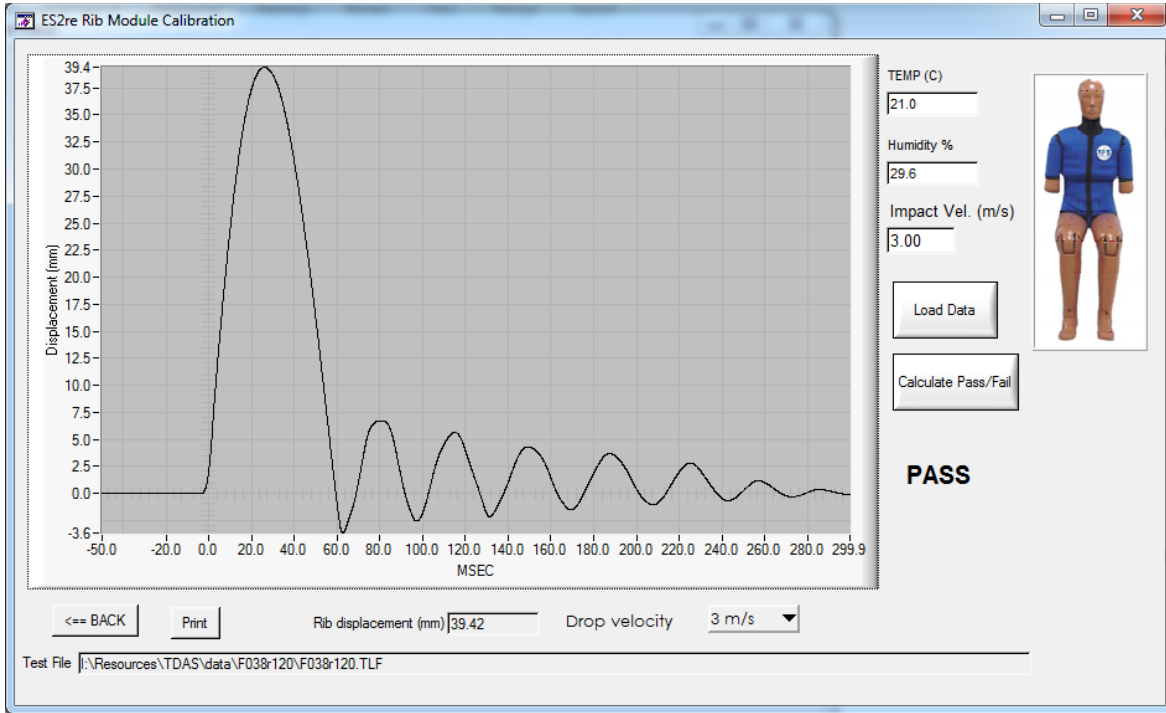

POST-TEST


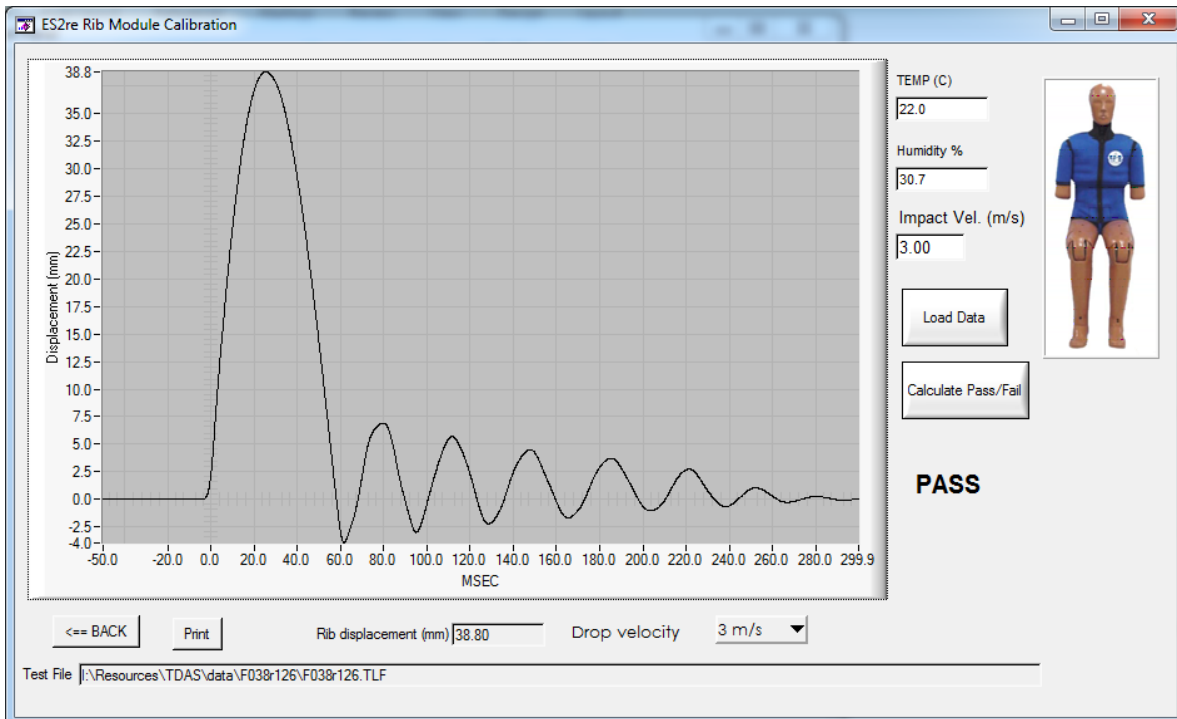


TABLE 7
THORAX – LOWER RIB DROP TEST (ES-IIre) (CONTINUED)
4.00 m/s

PRE-TEST

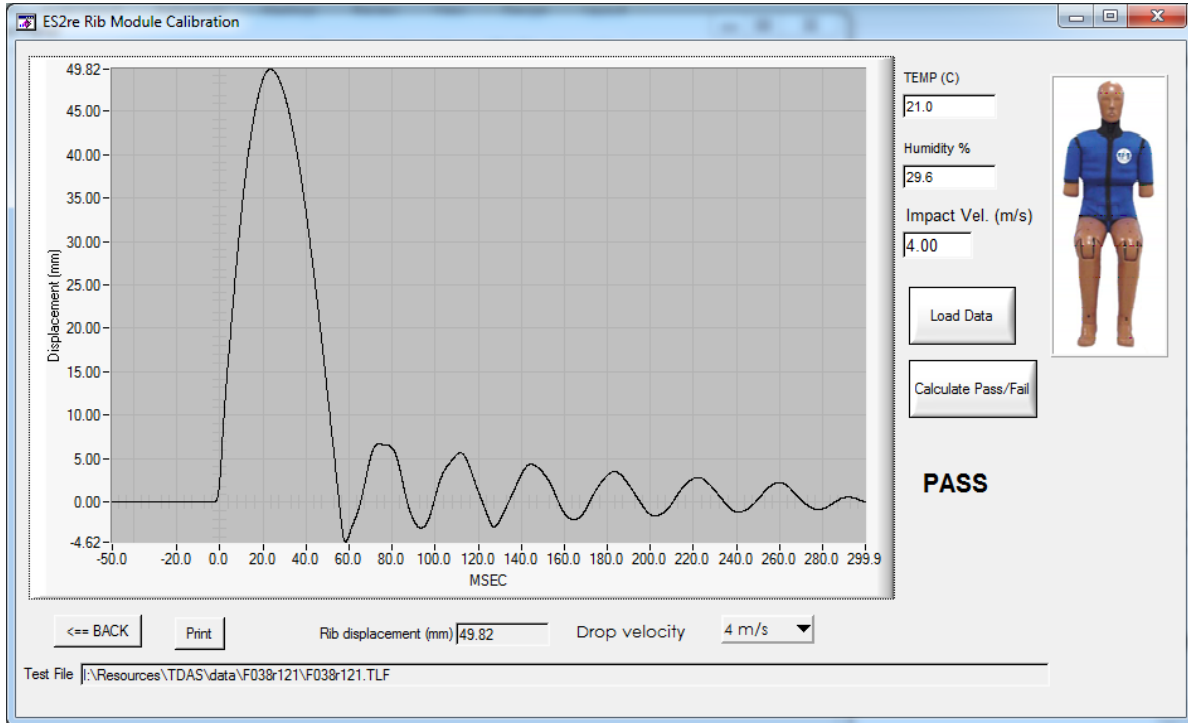

POST-TEST

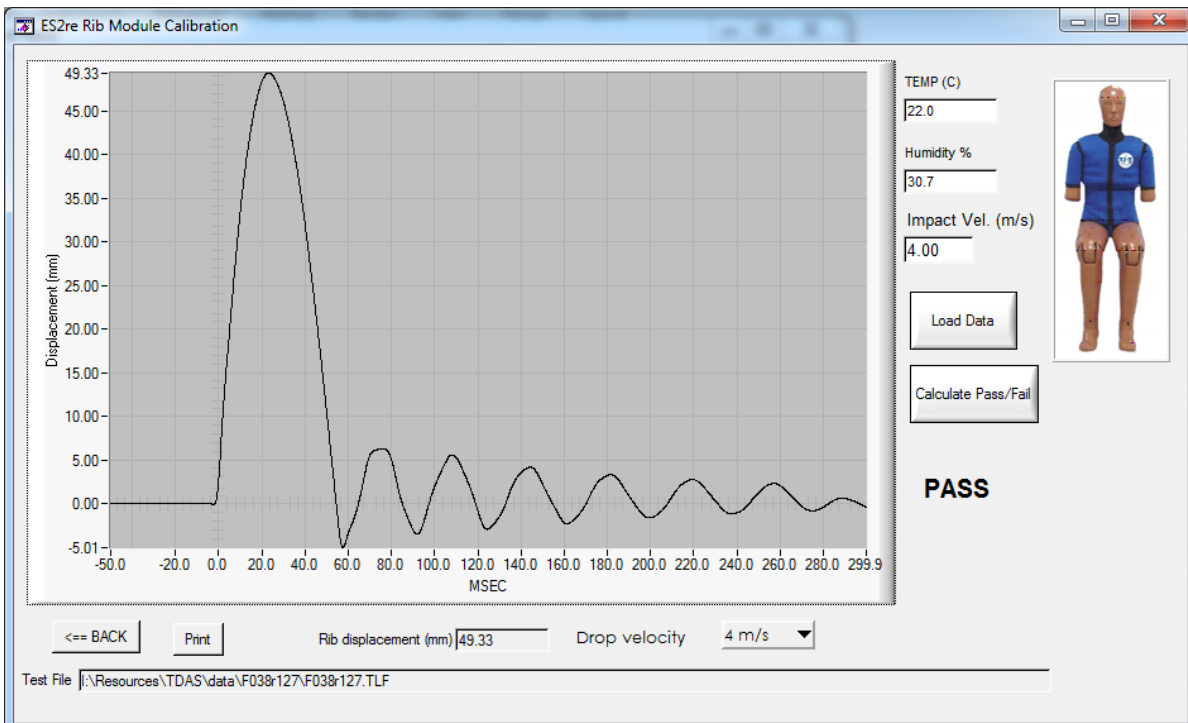



TABLE 8
THORAX – FULL BODY IMPACT TEST (ES-IIre)

ES-IIre Serial Number F038 Test Sequences 1 & 2

TEST PARAMETER		SPEC.	PRE		POST	
Date		-	11-9-13		11-18-13	
Sequential Test Number		-	1		2	
			Result	Pass/Fail	Result	Pass/Fail
Dummy Soak Time (min)		≥ 240	240	Pass	240	Pass
Temperature (°C) – During Soak	Max	20.6-22.2	21.2	Pass	21.1	Pass
	Min		20.7	Pass	20.8	Pass
Humidity (%) – During Soak	Max	10.0-70.0	30.4	Pass	33.3	Pass
	Min		29.1	Pass	30.6	Pass
Temperature – During Test (°C)		20.6-22.2	21.2	Pass	21.1	Pass
Humidity – During Test (%)		10-70	30.4	Pass	33.3	Pass
Peak Impactor Velocity (m/s)		5.4-5.6	5.46	Pass	5.46	Pass
Peak Upper Rib Deflection (mm)		34-41	37.3	Pass	37.0	Pass
Peak Middle Rib Deflection (mm)		37-45	41.6	Pass	41.6	Pass
Peak Lower Rib Deflection (mm)		37-44	41.4	Pass	41.5	Pass
Peak Impactor Force (>6ms) (kN)		5.1-6.2	5.3	Pass	5.4	Pass

TABLE 8
THORAX – FULL BODY IMPACT TEST (ES-IIre)

PRE-TEST

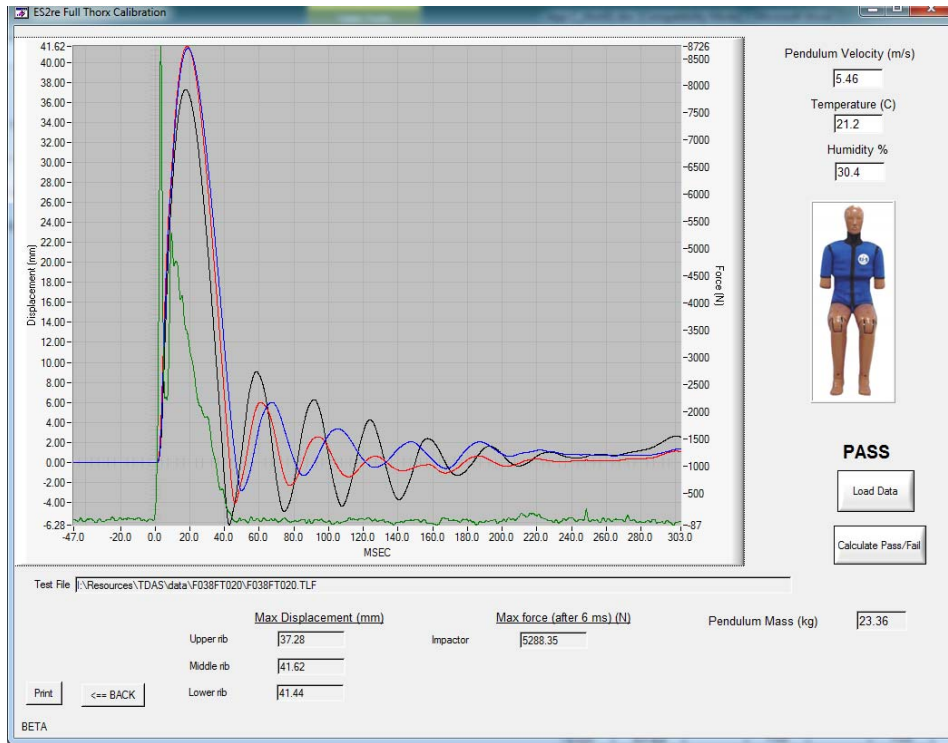

POST-TEST

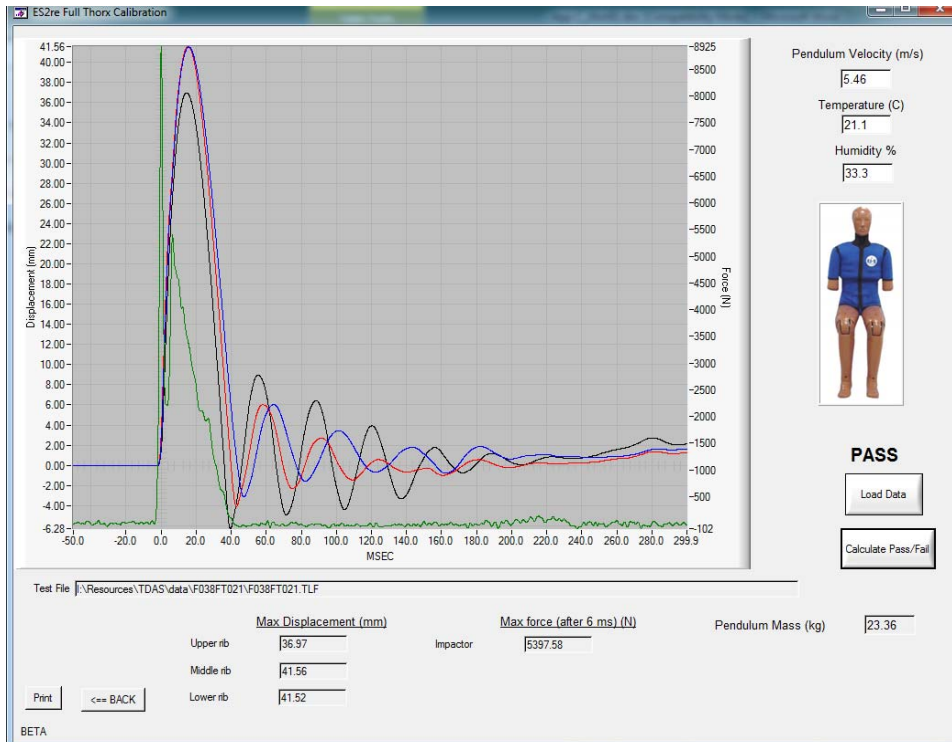



TABLE 9
ABDOMEN IMPACT TEST (ES-IIre)

ES-IIre Serial Number F038 Test Sequences 1 & 2

TEST PARAMETER		SPEC.	PRE		POST	
Date		-	11-9-13		11-18-13	
Sequential Test Number		-	1		2	
			Result	Pass/Fail	Result	Pass/Fail
Dummy Soak Time (min)		≥ 240	240	Pass	240	Pass
Temperature (°C) – During Soak	Max	20.6-22.2	21.5	Pass	21.0	Pass
	Min		20.8	Pass	20.9	Pass
Humidity (%) – During Soak	Max	10.0-70.0	30.2	Pass	33.3	Pass
	Min		28.6	Pass	31.2	Pass
Temperature – During Test (°C)		20.6-22.2	21.5	Pass	21.0	Pass
Humidity – During Test (%)		10-70	30.2	Pass	33.3	Pass
Peak Impactor Velocity (m/s)		3.9-4.1	4.1	Pass	4.1	Pass
Sum of Abdominal Forces (kN)		2.2-2.7	2.6	Pass	2.6	Pass
Time of Abdominal Forces (ms)		10-12.3	10.2	Pass	10.2	Pass
Peak Impactor Force (kN)		4.0-4.8	4.5	Pass	4.3	Pass
Time of Peak Impactor Force (ms)		10.6-13.0	11.0	Pass	10.9	Pass

TABLE 9
ABDOMEN IMPACT TEST (ES-IIre) (CONTINUED)

PRE-TEST

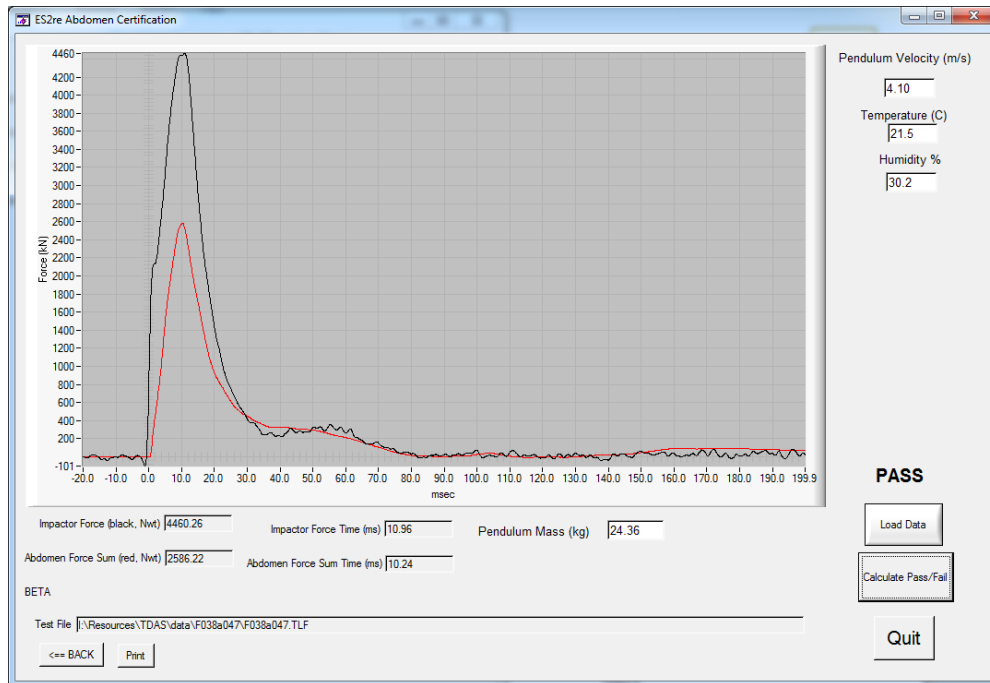

POST-TEST

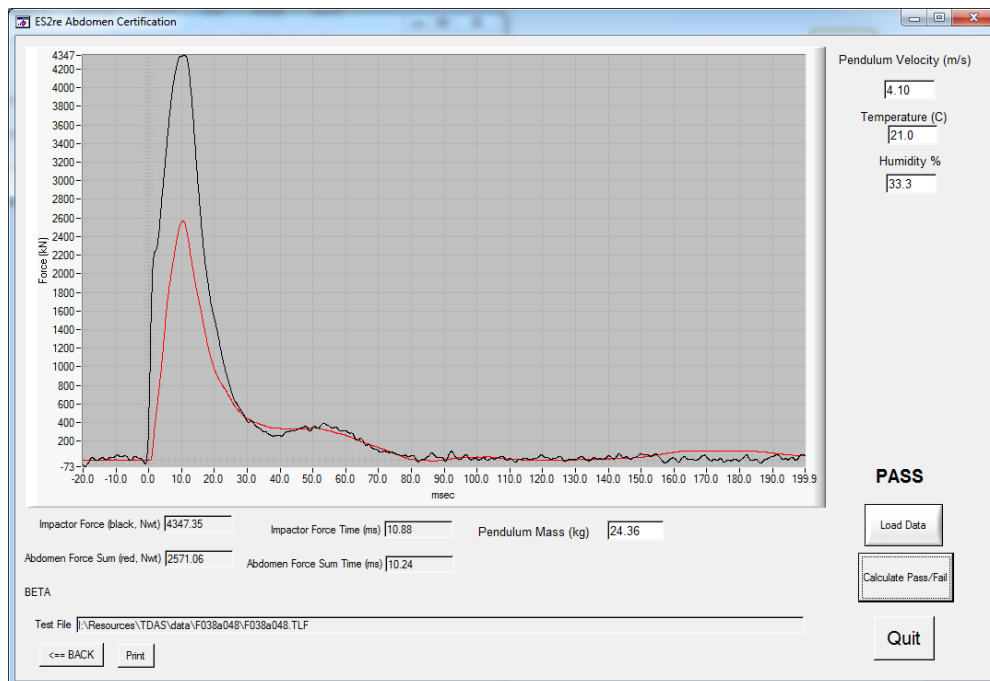



TABLE 10
LUMBAR SPINE FLEXION TEST (ES-IIre)

ES-IIre Serial Number F038 Test Sequences 1 & 2


TEST PARAMETER		SPEC.	PRE		POST	
Date		-	11-7-13		11-16-13	
Sequential Test Number		-	1		2	
			Result	Pass/Fail	Result	Pass/Fail
Lumbar Spine Assembly Soak Time (min)		≥ 240	240	Pass	240	Pass
Temperature (°C) – During Soak	Max	20.6-22.2	20.8	Pass	20.9	Pass
	Min		20.6	Pass	20.6	Pass
Humidity (%) – During Soak	Max	10.0-70.0	32.6	Pass	30.5	Pass
	Min		31.0	Pass	28.7	Pass
Temperature – During Test (°C)		20.6-22.2	20.8	Pass	20.9	Pass
Humidity – During Test (%)		10-70	32.6	Pass	30.5	Pass
Pendulum Velocity (m/s)		5.95-6.15	6.1	Pass	6.1	Pass
Pendulum Velocity Corridors (m/s)	0-1.0 ms	(-0.05)-0.00	-0.04	Pass	-0.04	Pass
	2.7-3.7 ms	(-0.425) - (-0.24)	-0.46	Pass	-0.46	Pass
	24.5-27.0 ms	(-6.50) - (-5.80)	-6.0	Pass	-5.9	Pass
	Max after 30 ms	-6.50	-6.4	Pass	-6.4	Pass
Maximum Headform Flexion Angle (deg)		45-55	45.2	Pass	45.5	Pass
Time at Maximum Flexion Angel (ms)		39-53	44.5	Pass	44.2	Pass
Time of Decay to Zero Angle from Peak (ms)		37-57	38.5	Pass	39.8	Pass

TABLE 10
LUMBAR SPINE FLEXION TEST (ES-IIre) (CONTINUED)

PRE-TEST

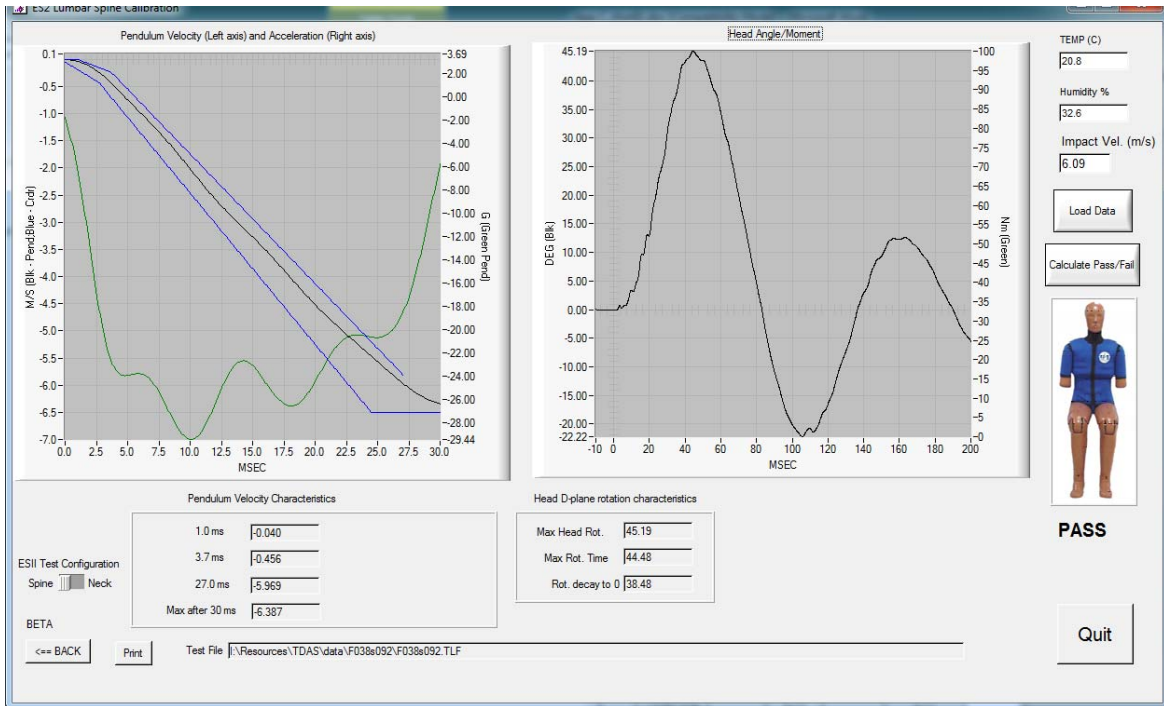

POST-TEST

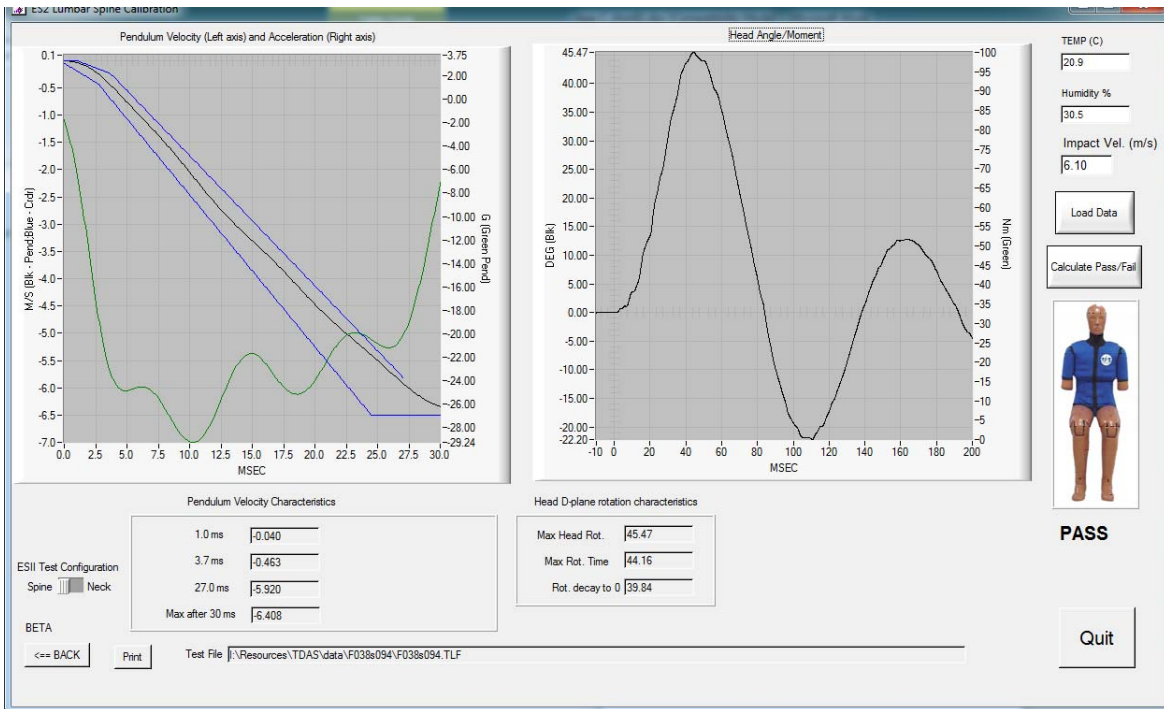


**TABLE 11
 PELVIS IMPACT TEST (ES-IIre)**

ES-IIre Serial Number F038 Test Sequences 1 & 2

TEST PARAMETER		SPEC.	PRE		POST	
Date		-	11-9-13		11-18-13	
Sequential Test Number		-	1		2	
			Result	Pass/Fail	Result	Pass/Fail
Dummy Soak Time (min)		≥ 240	240	Pass	240	Pass
Temperature (°C) – During Soak	Max	20.6-22.2	21.1	Pass	21.0	Pass
	Min		20.7	Pass	20.7	Pass
Humidity (%) – During Soak	Max	10.0-70.0	29.8	Pass	33.7	Pass
	Min		28.4	Pass	30.2	Pass
Temperature – During Test (°C)		20.6-22.2	21.1	Pass	21.0	Pass
Humidity – During Test (%)		10-70	29.8	Pass	33.7	Pass
Pendulum Velocity (m/s)		4.2-4.4	4.4	Pass	4.4	Pass
Peak Impactor Force (kN)		4.7 – 5.4	4.8	Pass	5.0	Pass
Time at Peak Force (ms)		11.8-16.1	12.8	Pass	11.9	Pass
Peak Pubic Symphysis Force (kN)		1.23-1.59	1.4	Pass	1.6	Pass
Time at Peak Force (ms)		12.2-17.0	12.6	Pass	13.4	Pass

TABLE 11
PELVIS IMPACT TEST (ES-IIre) (CONTINUED)

PRE-TEST

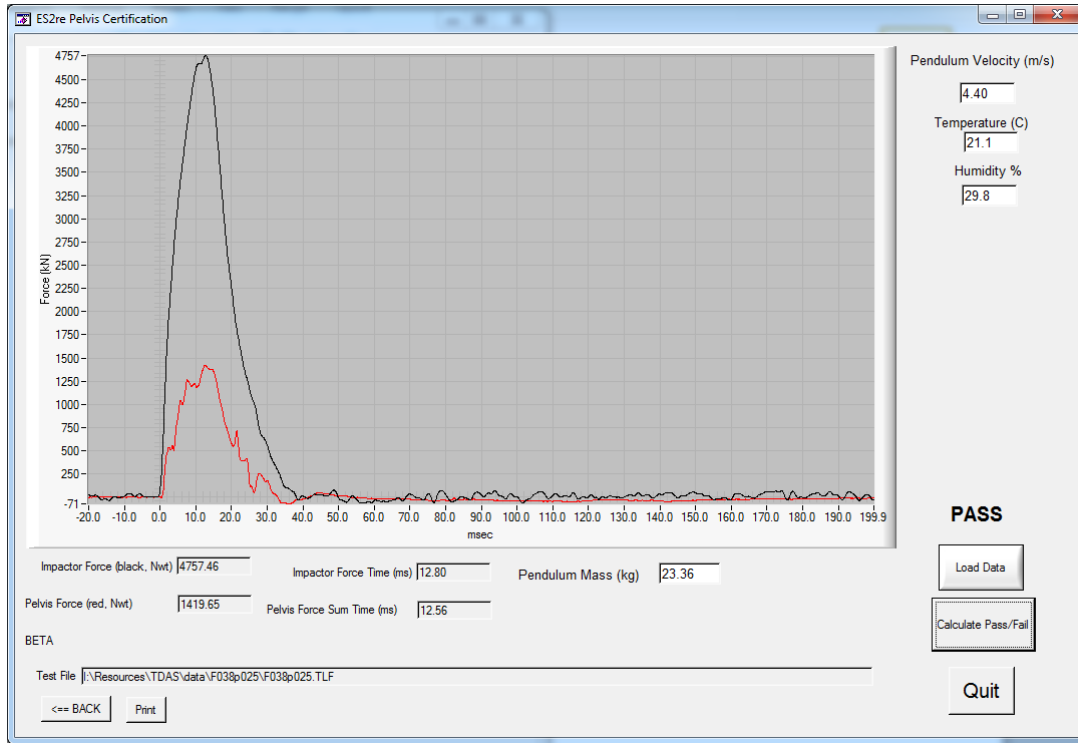

POST-TEST

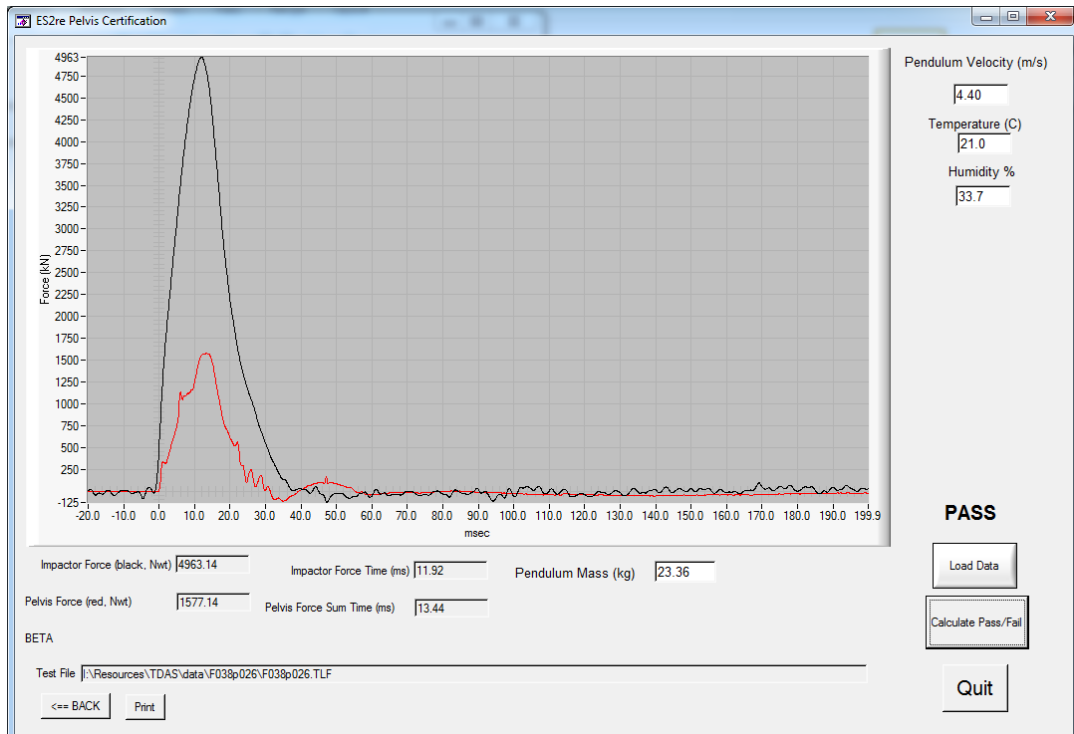


TABLE 1
EXTERNAL MEASUREMENTS (SID-IIs)

SIDIIs Serial Number 298 Test Sequences 1 & 2

TEST PARAMETER	SPEC.	PRE		POST	
Date	-	11-11-13		11-18-13	
Sequential Test Number	-	1		2	
		Result	Pass/Fail	Result	Pass/Fail
Temperature (°C)	20.6-22.2	20.9	Pass	21.1	Pass
Relative Humidity (%)	10-70	32.8	Pass	34.1	Pass
Sitting Height	772 – 788	774	Pass	775	Pass
Shoulder Pivot Height	437 – 453	451	Pass	448	Pass
H-Point Height	79 – 89	87	Pass	86	Pass
H-Point from Seat Back	141 – 151	146	Pass	146	Pass
Shoulder Pivot from Backline	97 – 107	100	Pass	102	Pass
Thigh Clearance	119 – 135	128	Pass	125	Pass
Head Breadth	140 – 148	146	Pass	143	Pass
Head Back from Backline	40 – 46	45	Pass	42	Pass
Head Depth	178 – 188	181	Pass	182	Pass
Head Circumference	541 – 551	543	Pass	542	Pass
Buttock to Knee Length	514 – 540	520	Pass	525	Pass
Popliteal Height	343 – 369	353	Pass	356	Pass
Knee Pivot to Floor Height	392 – 409	407	Pass	405	Pass
Buttock Popliteal Length	416 – 442	434	Pass	431	Pass
Chest Depth w/o Jacket	195 – 211	208	Pass	207	Pass
Foot Length	216 – 232	224	Pass	225	Pass
Hip Breadth	313 – 323	319	Pass	318	Pass
Arm Length	249 – 259	253	Pass	255	Pass
Knee Joint to Seat Back	477 – 493	486	Pass	485	Pass
Shoulder Width	341 – 357	347	Pass	351	Pass
Foot Width	78 – 94	86	Pass	87	Pass
Chest Circumference w/Jacket	851 – 881	872	Pass	874	Pass
Waist Circumference	761 – 791	774	Pass	775	Pass


TABLE 2
HEAD DROP TEST (SID-IIs)

SIDIIs Serial Number 298 Test Sequences 1 & 2

TEST PARAMETER		SPEC.	PRE		POST	
Date		-	11-9-13		11-16-13	
Sequential Test Number		-	1		2	
			Result	Pass/Fail	Result	Pass/Fail
Head Soak Time (min)		≥ 240	240	Pass	240	Pass
Temperature(°C) – During Soak	Max	20.6-22.2	21.0	Pass	22.0	Pass
	Min		20.7	Pass	21.3	Pass
Humidity(%) – During Soak	Max	10.0-70.0	28.7	Pass	32.5	Pass
	Min		27.3	Pass	30.1	Pass
Temperature – During Test (°C)		20.6-22.2	21.0	Pass	22.0	Pass
Humidity – During Test (%)		10-70	28.7	Pass	32.5	Pass
Peak Head Resultant Acceleration (G)		115-137	121.3	Pass	120.2	Pass
Peak Head X Acceleration (G)		<15	1.3	Pass	3	Pass
Unimodal (Oscillation) (Yes/No)		<15%	Yes	Pass	Yes	Pass

TABLE 2
HEAD DROP TEST (SID-II_s) (CONTINUED)

PRE-TEST

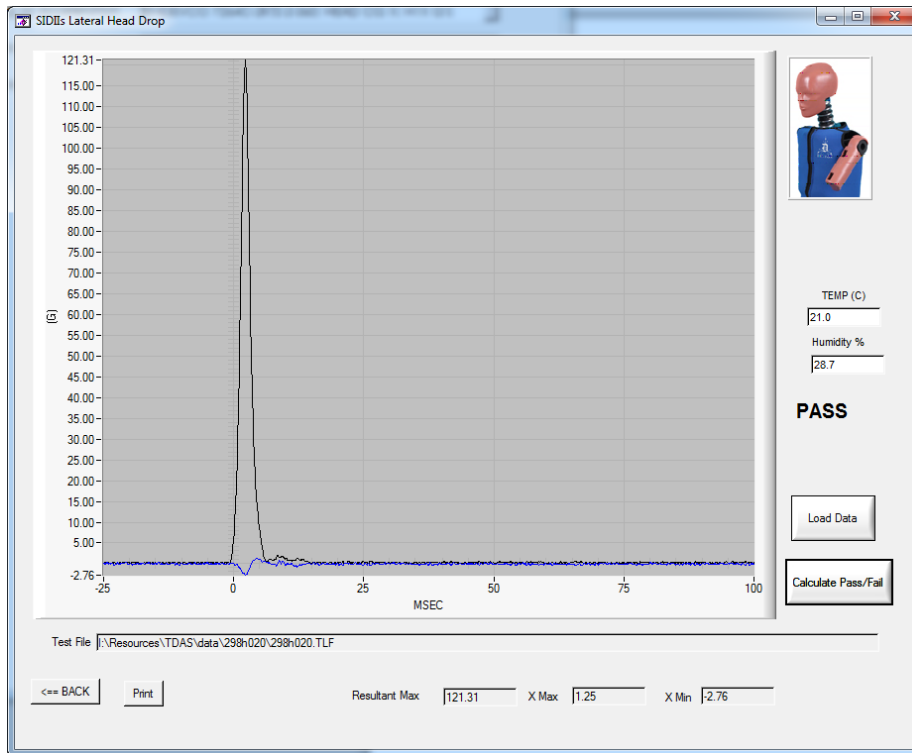

POST-TEST

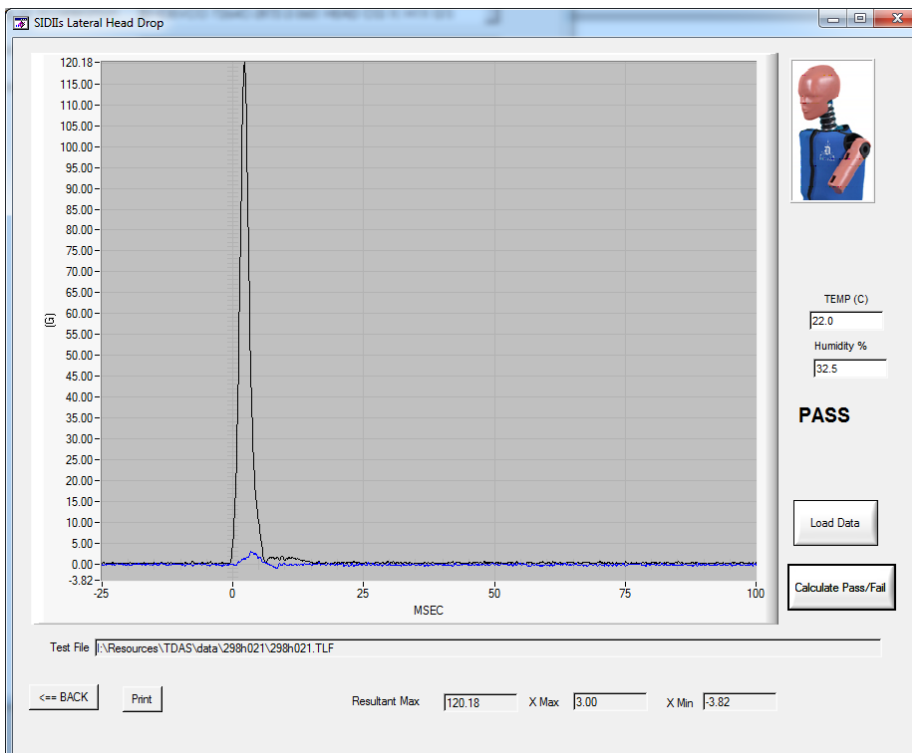



TABLE 3
LATERAL NECK PENDULUM TEST (SID-II)s

SIDIIs Serial Number 298 Test Sequences 1 & 2

TEST PARAMETER		SPEC.	PRE		POST	
Date		-	11-4-13		11-18-13	
Sequential Test Number		-	1		2	
			Result	Pass/Fail	Result	Pass/Fail
Neck Assembly Soak Time (min)		≥ 240	240	Pass	240	Pass
Temperature(°C) – During Soak	Max	20.6-22.2	20.9	Pass	20.8	Pass
	Min		20.6	Pass	20.6	Pass
Humidity(%) – During Soak	Max	10.0-70.0	37.3	Pass	34.8	Pass
	Min		36.0	Pass	31.1	Pass
Temperature – During Test (°C)		20.6-22.2	20.9	Pass	20.8	Pass
Humidity – During Test (%)		10-70	37.3	Pass	34.8	Pass
Pendulum Velocity (m/s)		5.51-5.63	5.55	Pass	5.58	Pass
Pendulum Deceleration (G)	10 ms	2.20-2.80	2.6	Pass	2.3	Pass
	15 ms	3.30-4.10	3.8	Pass	3.5	Pass
	20 ms	4.40-5.40	5.1	Pass	4.8	Pass
	25 ms	5.40-6.10	5.9	Pass	5.8	Pass
	25-100 ms	5.50-6.20	5.9	Pass	6.0	Pass
Maximum D-Plane rotation (deg)		71-81	77.5	Pass	74.8	Pass
Time of Maximum D-Plane Rotation (ms)		50-70	65.0	Pass	56.6	Pass
Peak Occ. Condyle Moment (Nm)		36-44	40.0	Pass	42.0	Pass
Time of Moment Decay (ms)		102-126	125.7	Pass	115.4	Pass

**TABLE 3
 LATERAL NECK PENDULUM TEST (SID-II_s) (CONTINUED)**

PRE-TEST

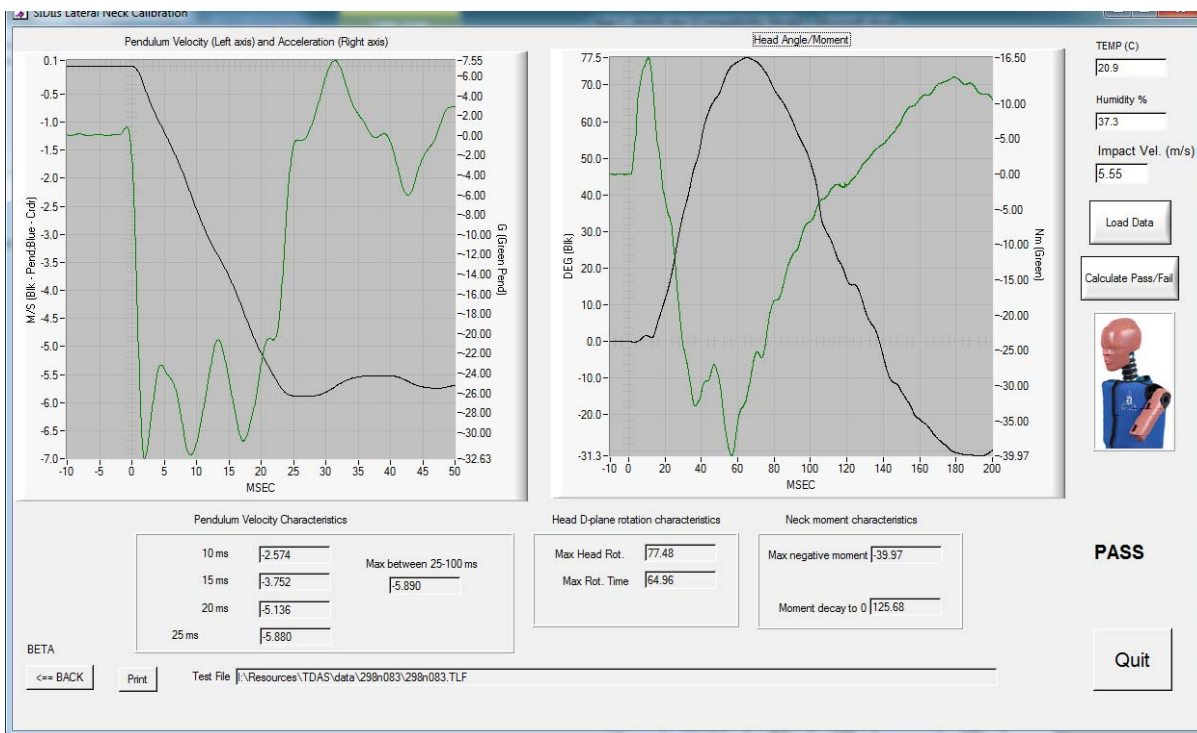

POST-TEST

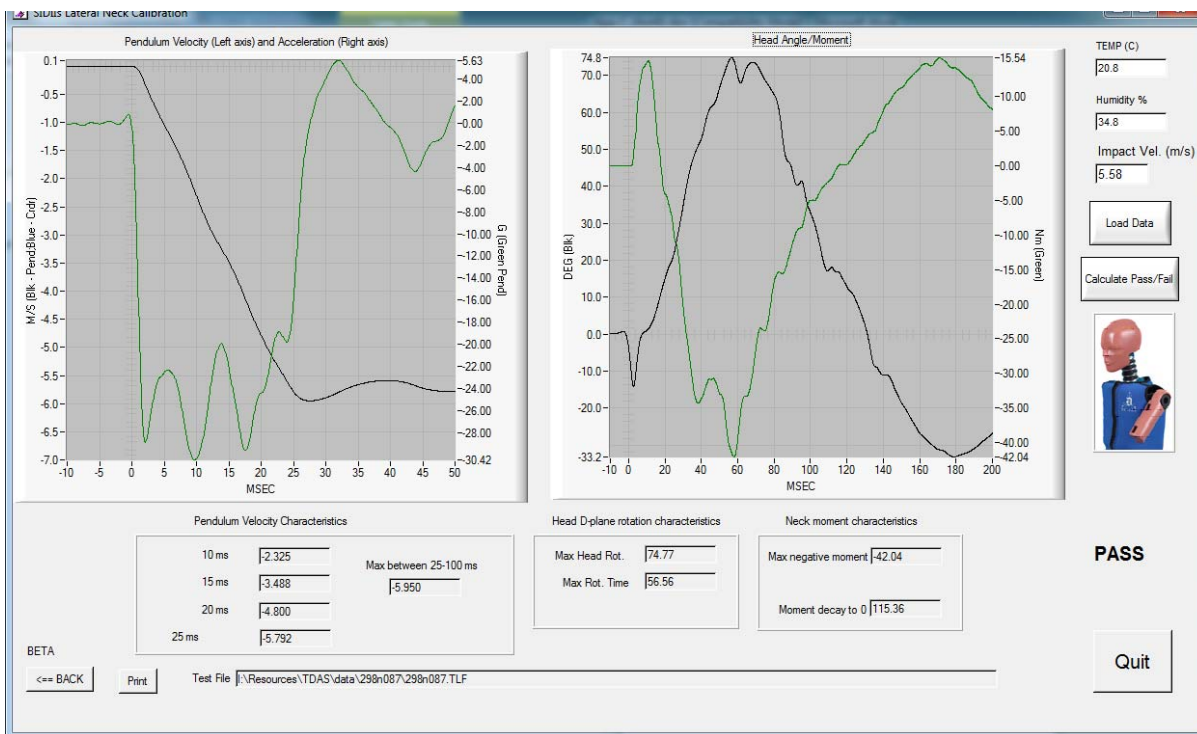



TABLE 4
SHOULDER IMPACT TEST (SID-IIs)

SIDIIs Serial Number 298 Test Sequences 1 & 2

TEST PARAMETER		SPEC.	PRE		POST	
Date		-	11-9-13		11-18-13	
Sequential Test Number		-	1		2	
			Result	Pass/Fail	Result	Pass/Fail
Dummy Soak Time (min)		≥ 180	180	Pass	180	Pass
Temperature(°C) – During Soak	Max	20.6-22.2	20.9	Pass	20.8	Pass
	Min		20.6	Pass	20.6	Pass
Humidity(%) – During Soak	Max	10.0-70.0	29.3	Pass	34.8	Pass
	Min		28.4	Pass	31.2	Pass
Temperature – During Test (°C)		20.6-22.2	20.9	Pass	20.8	Pass
Relative Humidity – During Test (%)		10-70	29.3	Pass	34.8	Pass
Impactor Velocity (m/s)		4.2-4.4	4.3	Pass	4.3	Pass
Peak Shoulder Deflection (mm)		28-37	31.1	Pass	28.6	Pass
Peak Lateral Spine (T1) Acceleration Y (G)		17-22	20.8	Pass	20.6	Pass
Peak Impactor Acceleration (G)		13-18	17.6	Pass	15.8	Pass

TABLE 4
SHOULDER IMPACT TEST (SID-II)s (CONTINUED)

PRE-TEST

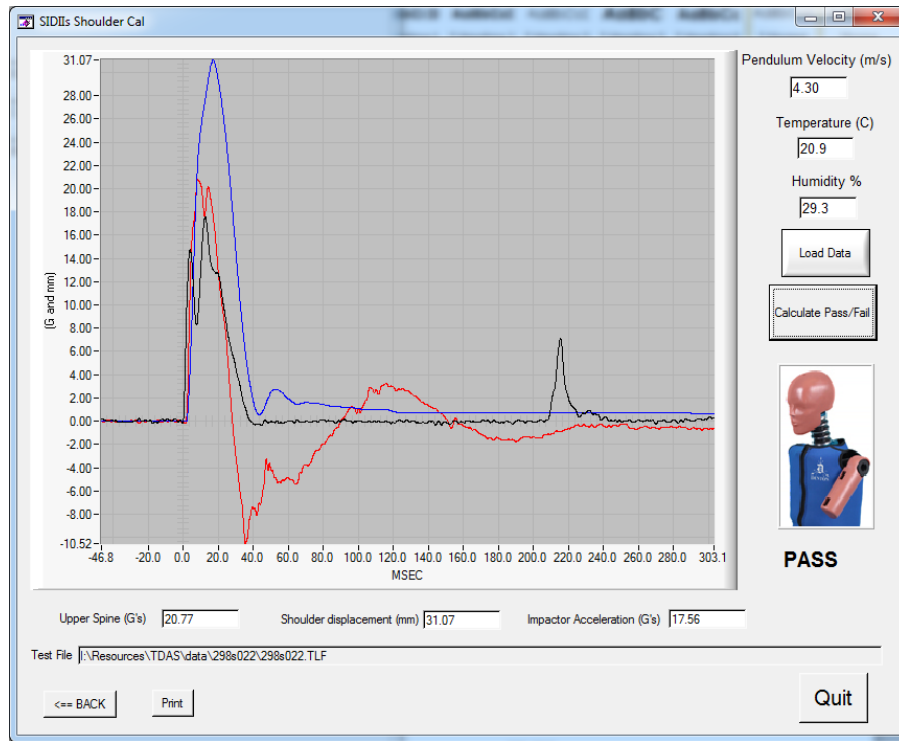

POST-TEST

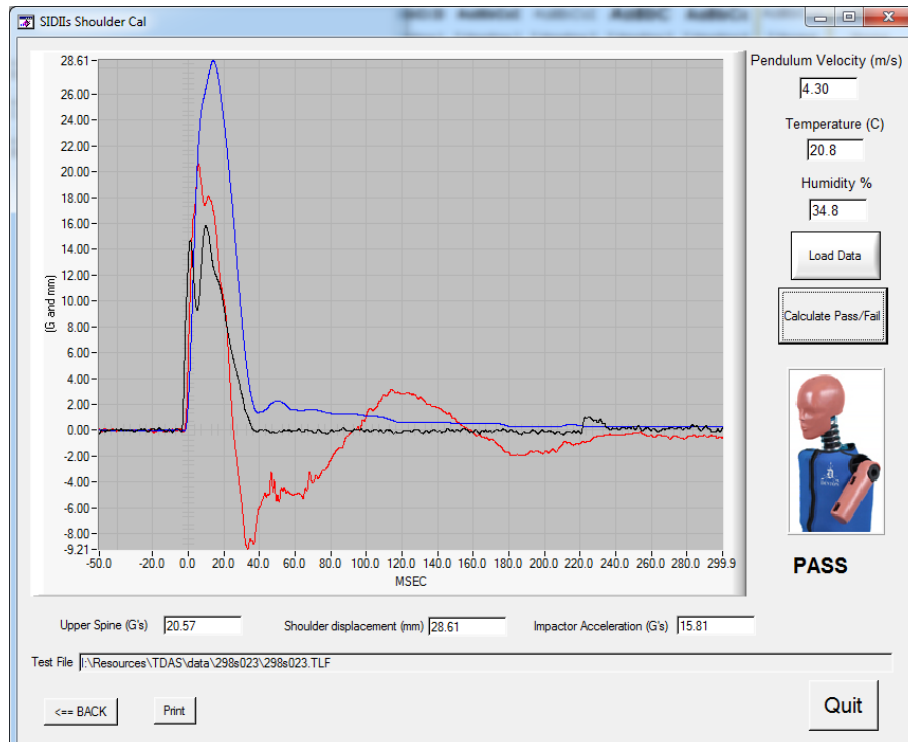



TABLE 5
THORAX (WITH ARM) IMPACT TEST (SID-II)s

SIDIIs Serial Number 298 Test Sequences 1 & 2

TEST PARAMETER		SPEC.	PRE		POST	
Date		-	11-9-13		11-18-13	
Sequential Test Number		-	1		2	
			Result	Pass/Fail	Result	Pass/Fail
Dummy Soak Time (min)		≥ 180	180	Pass	180	Pass
Temperature(°C) – During Soak	Max	20.6-22.2	21.5	Pass	20.9	Pass
	Min		20.8	Pass	20.6	Pass
Humidity(%) – During Soak	Max	10.0-70.0	30.3	Pass	34.2	Pass
	Min		28.7	Pass	33.1	Pass
Temperature – During Test (°C)		20.6-22.2	21.5	Pass	20.9	Pass
Relative Humidity – During Test (%)		10-70	30.3	Pass	34.2	Pass
Impactor Velocity (m/s)		6.6-6.8	6.73	Pass	6.73	Pass
Peak Shoulder Deflection (mm)		31-40	35.9	Pass	35.0	Pass
Peak Upper Rib Deflection (mm)		25-32	28.9	Pass	28.3	Pass
Peak Middle Rib Deflection (mm)		30-36	31.1	Pass	31.8	Pass
Peak Lower Rib Deflection (mm)		32-38	32.1	Pass	33.6	Pass
Peak Upper Spine (T1) Acceleration Y (G)		34-43	41.3	Pass	38.2	Pass
Peak Lower Spine (T12) Acceleration Y (G)		29-37	35.9	Pass	35.0	Pass
Peak Impactor Acceleration (G)		30-36	35.3	Pass	33.5	Pass

TABLE 5
THORAX (WITH ARM) IMPACT TEST (SID-II_s) (CONTINUED)

PRE-TEST

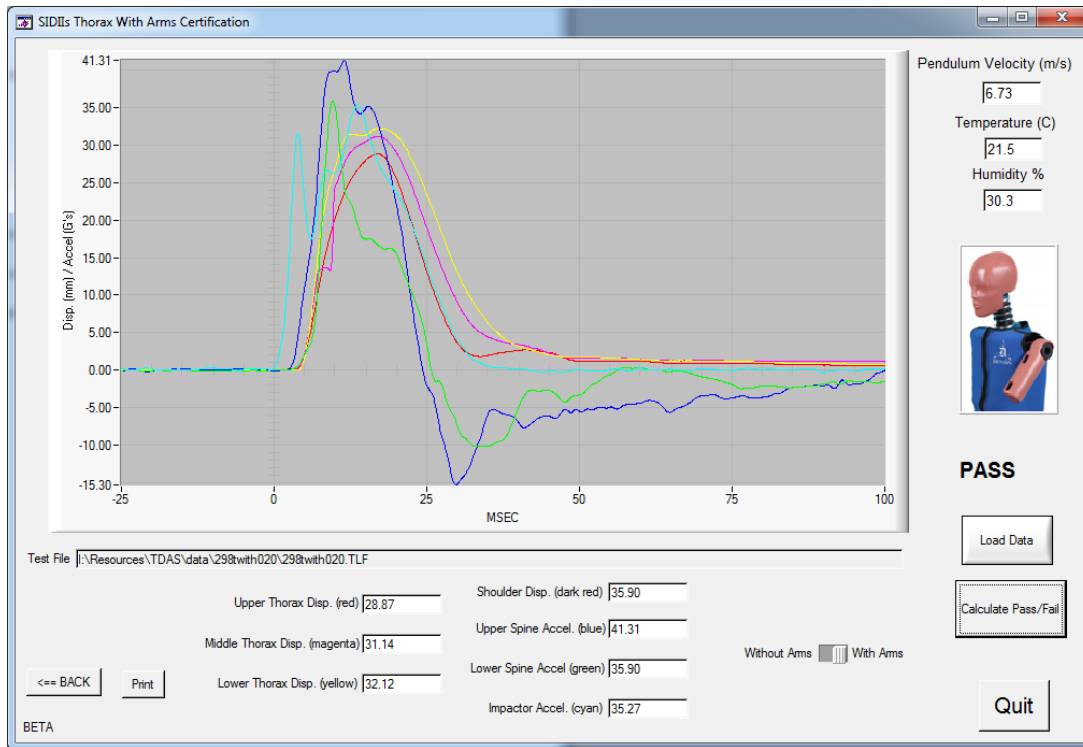

POST-TEST

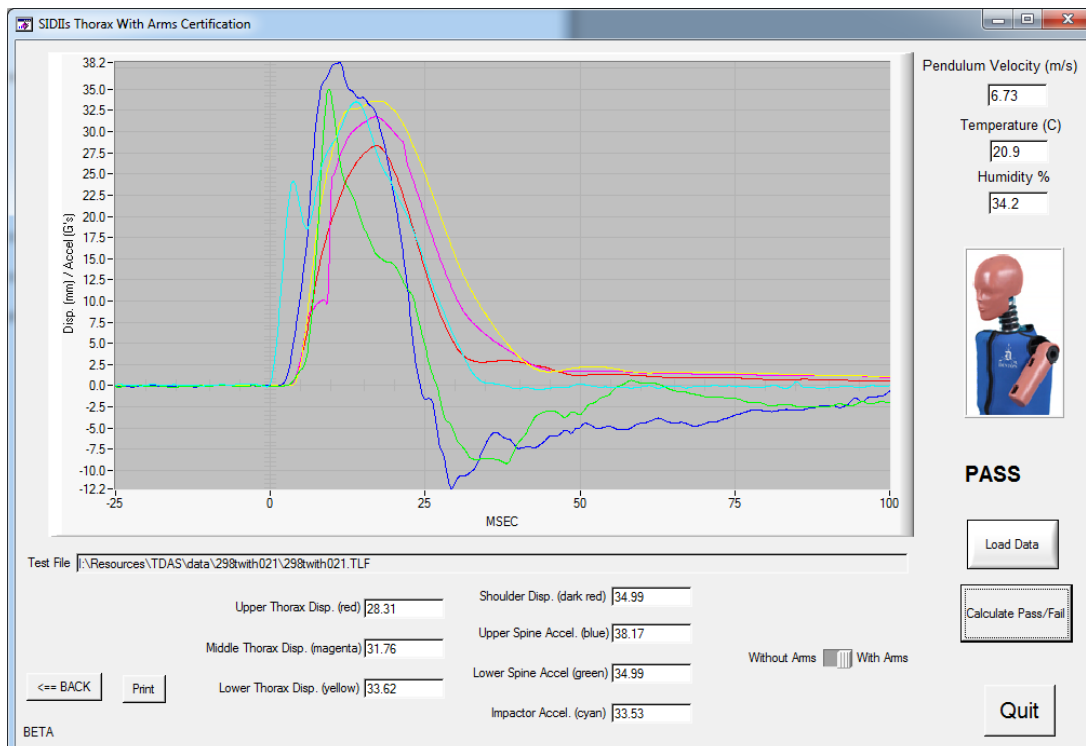



TABLE 6
THORAX (WITHOUT ARM) IMPACT TEST (SID-II)s

SIDIIs Serial Number 298 Test Sequences 1 & 2

TEST PARAMETER		SPEC.	PRE		POST	
Date		-	11-9-13		11-18-13	
Sequential Test Number		-	1		2	
			Result	Pass/Fail	Result	Pass/Fail
Dummy Soak Time (min)		≥ 180	180	Pass	180	Pass
Temperature(°C) – During Soak	Max	20.6-22.2	20.9	Pass	20.9	Pass
	Min		20.6	Pass	20.6	Pass
Humidity(%) – During Soak	Max	10.0-70.0	31.0	Pass	34.2	Pass
	Min		28.6	Pass	31.3	Pass
Temperature – During Test (°C)		20.6-22.2	20.9	Pass	20.9	Pass
Relative Humidity – During Test (%)		10-70	31.0	Pass	34.2	Pass
Impactor Velocity (m/s)		4.2-4.4	4.30	Pass	4.3	Pass
Peak Upper Rib Deflection (mm)		32-40	36.0	Pass	36.0	Pass
Peak Middle Rib Deflection (mm)		39-45	40.1	Pass	40.0	Pass
Peak Lower Rib Deflection (mm)		35-43	37.3	Pass	37.4	Pass
Peak Upper Spine (T1) Acceleration Y (G)		13-17	16.0	Pass	15.4	Pass
Peak Lower Spine (T12) Acceleration Y (G)		7-11	9.2	Pass	10.1	Pass
Peak Impactor Acceleration (G)		14-18	16.6	Pass	16.6	Pass

TABLE 6
THORAX (WITHOUT ARM) IMPACT TEST (SID-II)s (CONTINUED)

PRE-TEST

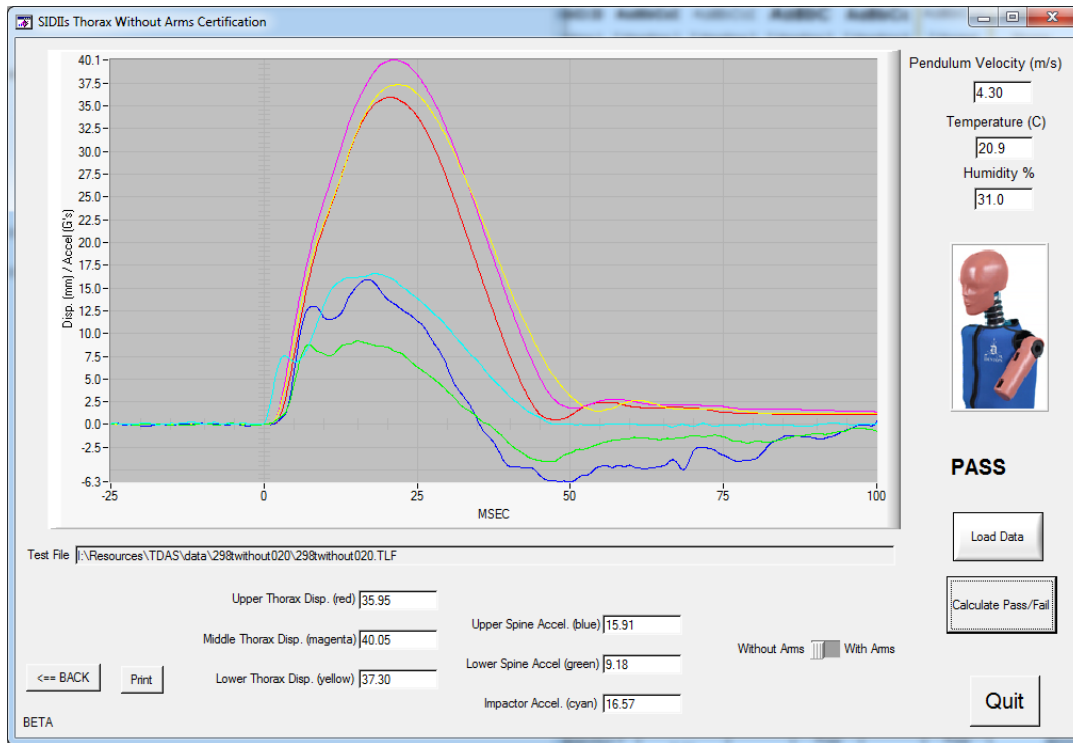

POST-TEST

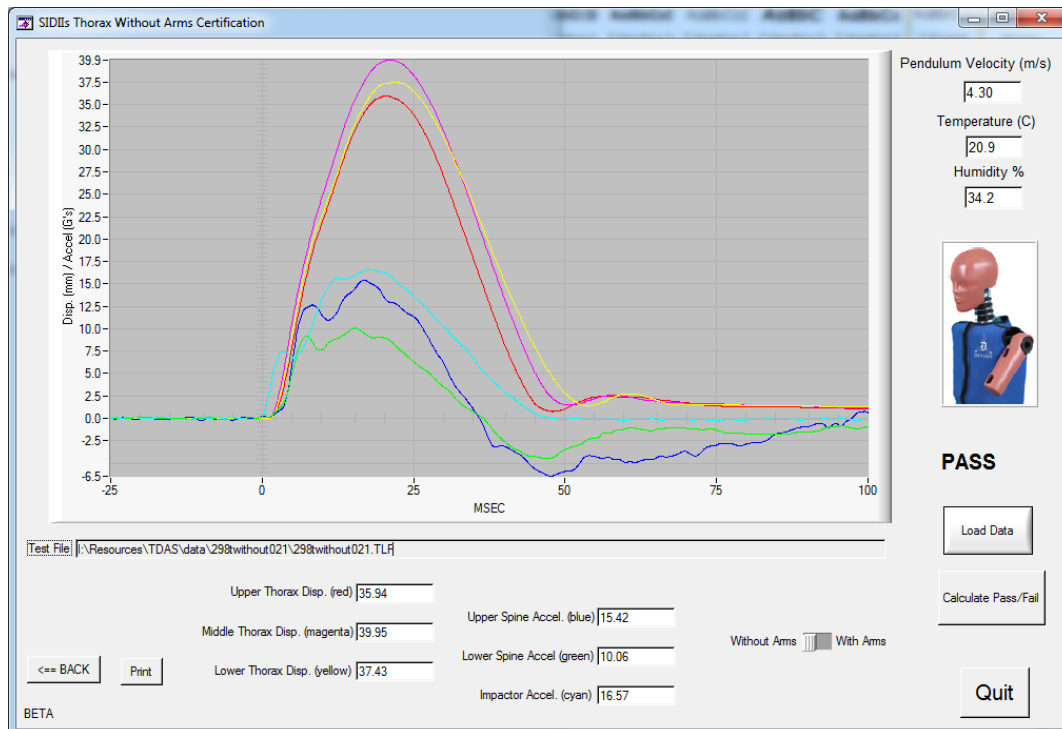



TABLE 7
ABDOMEN IMPACT TEST (SID-IIs)

SIDIIs Serial Number 298 Test Sequences 1 & 2

TEST PARAMETER		SPEC.	PRE		POST	
Date		-	11-9-13		11-18-13	
Sequential Test Number		-	1		2	
			Result	Pass/Fail	Result	Pass/Fail
Dummy Soak Time (min)		≥ 180	180	Pass	180	Pass
Temperature(°C) – During Soak	Max	20.6-22.2	21.0	Pass	21.0	Pass
	Min		20.7	Pass	20.7	Pass
Humidity(%) – During Soak	Max	10.0-70.0	31.4	Pass	34.8	Pass
	Min		28.6	Pass	32.6	Pass
Temperature – During Test (°C)		20.6-22.2	21.0	Pass	21.0	Pass
Relative Humidity – During Test (%)		10-70	31.4	Pass	34.8	Pass
Impactor Velocity (m/s)		4.2-4.4	4.25	Pass	4.25	Pass
Peak Upper Abdominal Rib Deflection (mm)		36-47	37.8	Pass	38.8	Pass
Peak Lower Abdominal Rib Deflection (mm)		33-44	38.1	Pass	37.0	Pass
Peak Lower Spine (T12) Acceleration Y (G)		9-14	12.0	Pass	12.3	Pass
Peak Impactor Acceleration (G)		12-16	15.2	Pass	15.3	Pass

**TABLE 7
 ABDOMEN IMPACT TEST (SID-IIIs) (CONTINUED)**

PRE-TEST

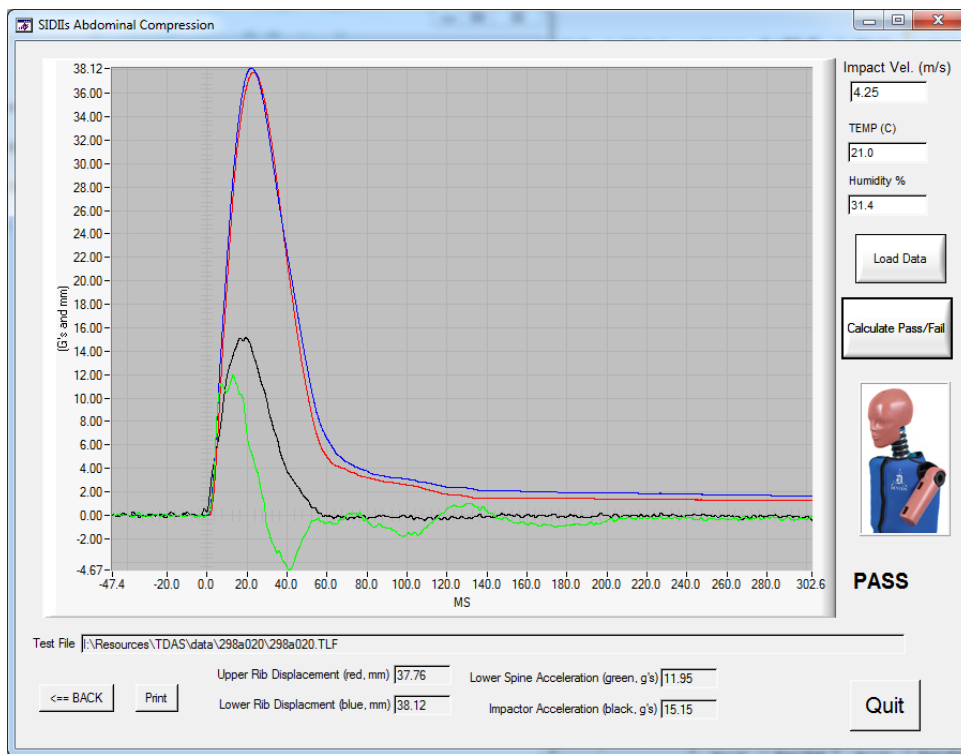

POST-TEST



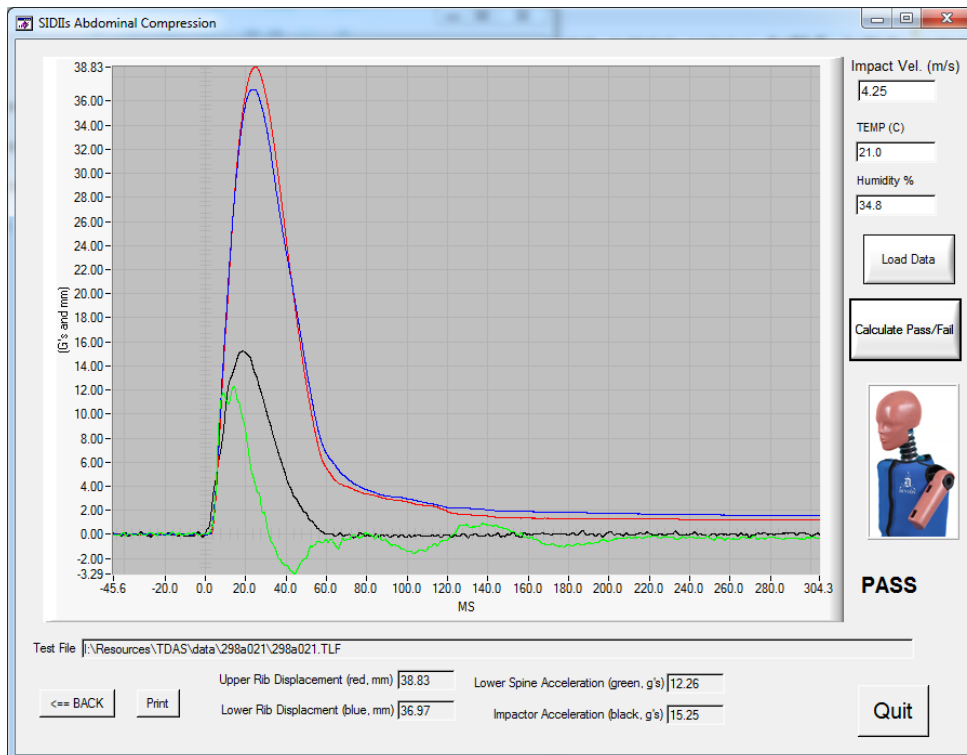


TABLE 8
PELVIS PLUG QUASI-STATIC TEST (SID-II)s

PRE-Test

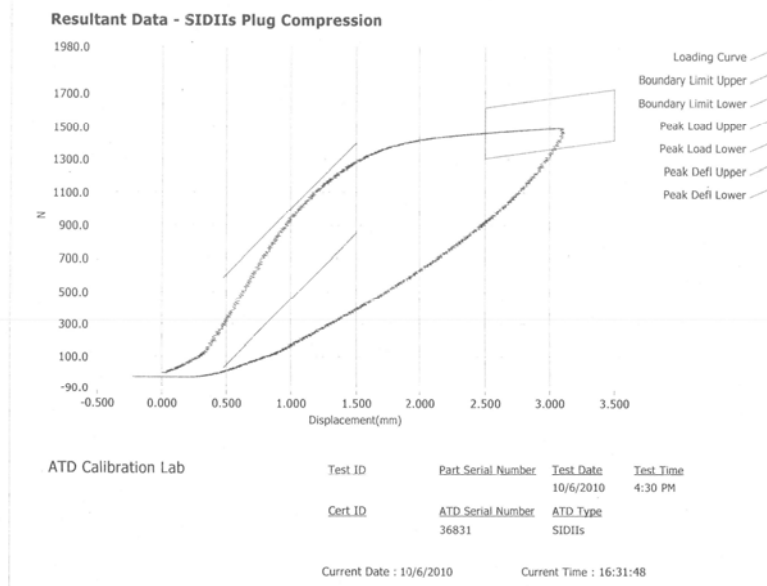

POST-TEST

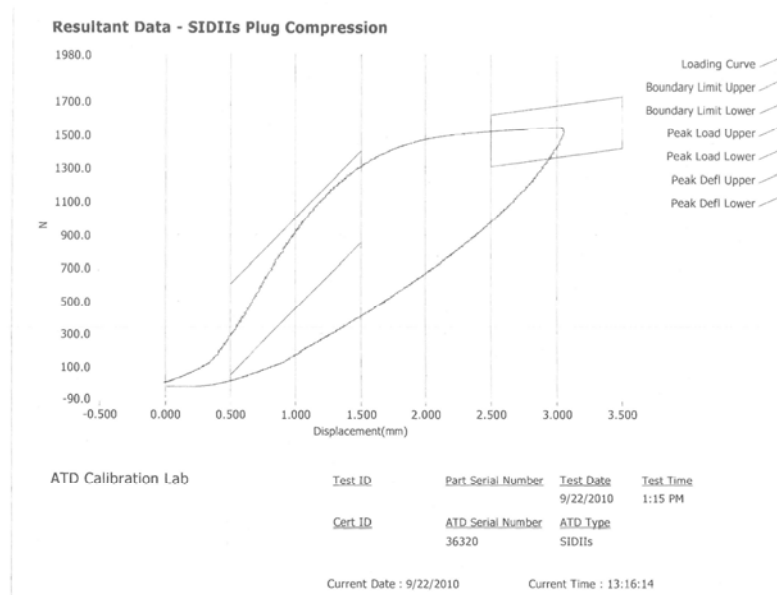


**TABLE 9
 PELVIS ACETABULUM IMPACT TEST (SID-IIs)**

SIDIIs Serial Number 298 Test Sequences 1 & 2

TEST PARAMETER		SPEC.	PRE		POST	
Date		-	11-11-13		11-18-13	
Sequential Test Number		-	1		2	
			Result	Pass/Fail	Results	Pass/Fail
Dummy Soak Time (min)		≥ 180	180	Pass	180	Pass
Temperature(°C) – During Soak	Max	20.6-22.2	22.0	Pass	21.0	Pass
	Min		20.9	Pass	20.6	Pass
Humidity(%) – During Soak	Max	10.0-70.0	30.1	Pass	34.9	Pass
	Min		28.4	Pass	33.2	Pass
Temperature – During Test (°C)		20.6-22.2	22.0	Pass	21.0	Pass
Humidity – During Test (%)		10-70	30.1	Pass	34.9	Pass
Impactor Velocity (m/s)		6.6-6.8	6.67	Pass	6.67	Pass
Peak Impactor Acceleration (G)		38-47	44.6	Pass	44.7	Pass
Pelvis Acceleration Y after 6ms (G)		34-42	41.1	Pass	40.7	Pass
Peak Acetabulum Force (kN)		3.60-4.30	3.8	Pass	3.9	Pass
Pelvis Plug Serial No. 36831 (Pre) No. 36320 (Post)						

TABLE 9
PELVIS ACETABULUM IMPACT TEST (SID-IIs) (CONTINUED)

PRE-TEST

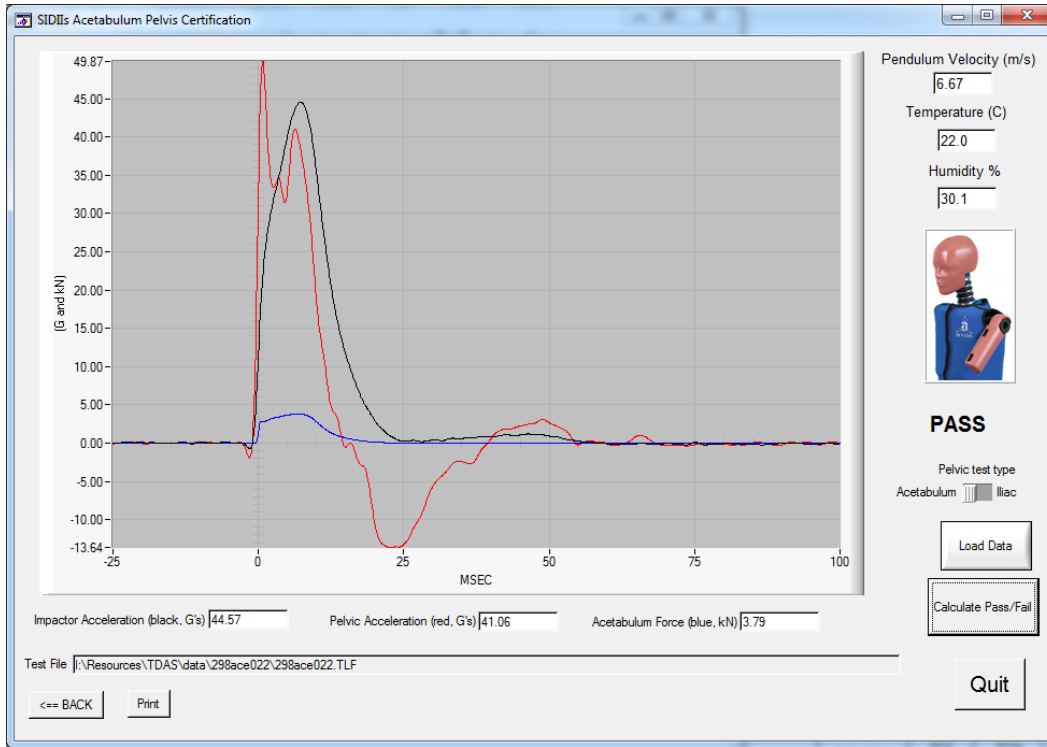

POST-TEST

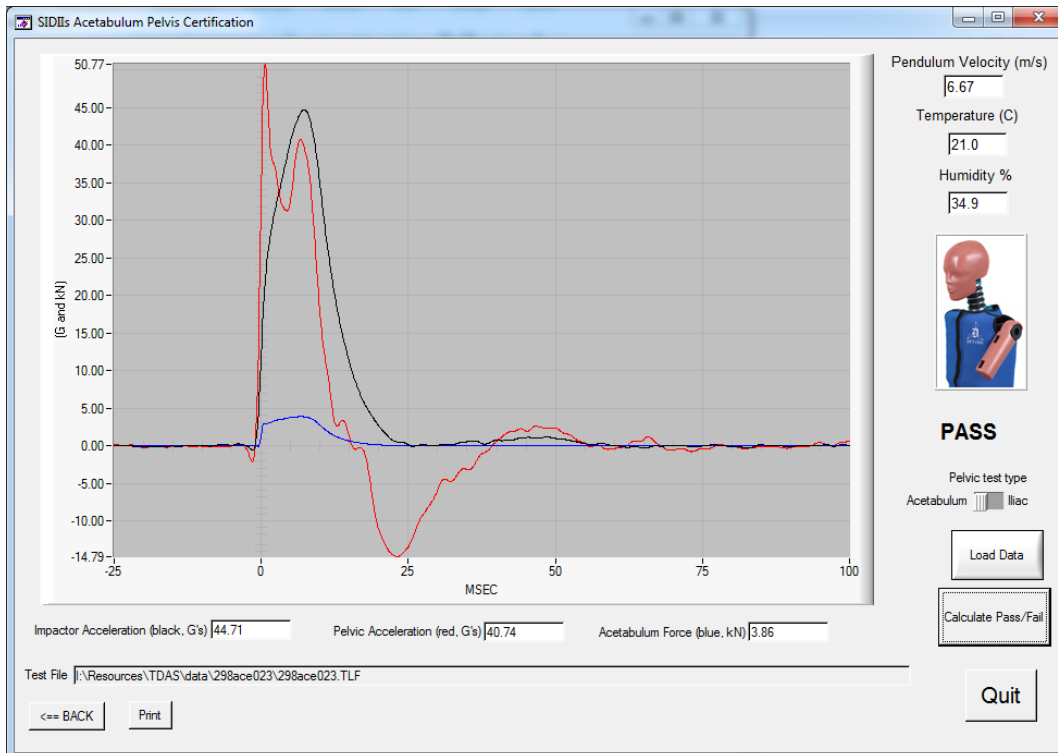



TABLE 10
PELVIS ILIAC IMPACT TEST (SID-IIs)

SIDIIs Serial Number 298 Test Sequences 1 & 2


TEST PARAMETER		SPEC.	PRE		POST	
Date		-	11-11-13		11-18-13	
Sequential Test Number		-	1		2	
			Result	Pass/Fail	Result	Pass/Fail
Dummy Soak Time (min)		≥ 180	180	Pass	180	Pass
Temperature(°C) – During Soak	Max	20.6-22.2	22.1	Pass	21.0	Pass
	Min		20.8	Pass	20.7	Pass
Humidity(%) – During Soak	Max	10.0-70.0	31.3	Pass	34.9	Pass
	Min		29.8	Pass	30.9	Pass
Temperature – During Test (°C)		20.6-22.2	22.1	Pass	21.0	Pass
Humidity – During Test (%)		10-70	31.3	Pass	34.9	Pass
Pendulum Velocity (m/s)		4.2-4.4	4.23	Pass	4.23	Pass
Peak Impactor Acceleration (G)		36-45	41.0	Pass	38.6	Pass
Pelvis Acceleration Y (G)		28-39	33.7	Pass	31.1	Pass
Peak Iliac Force Y (N)		4.10-5.10	4.7	Pass	4.4	Pass
Pelvis Plug Serial No. 36831 (Pre) No. 36320 (Post)						

TABLE 10
PELVIS ILIAC IMPACT TEST (SID-II_s) (CONTINUED)

PRE-TEST

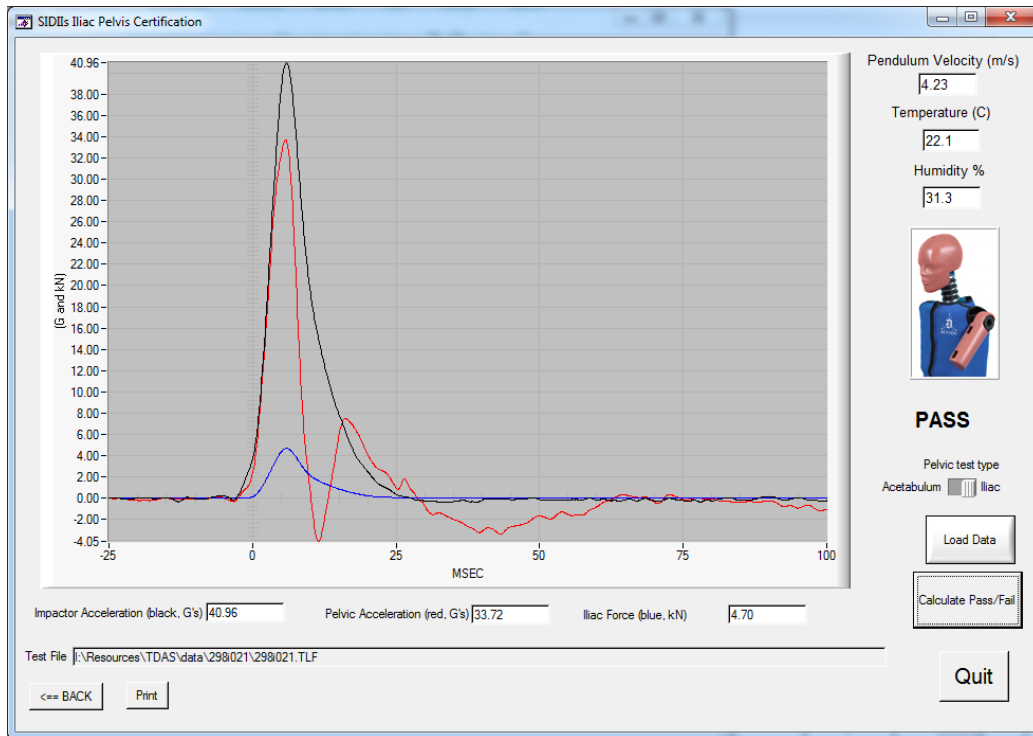

POST-TEST

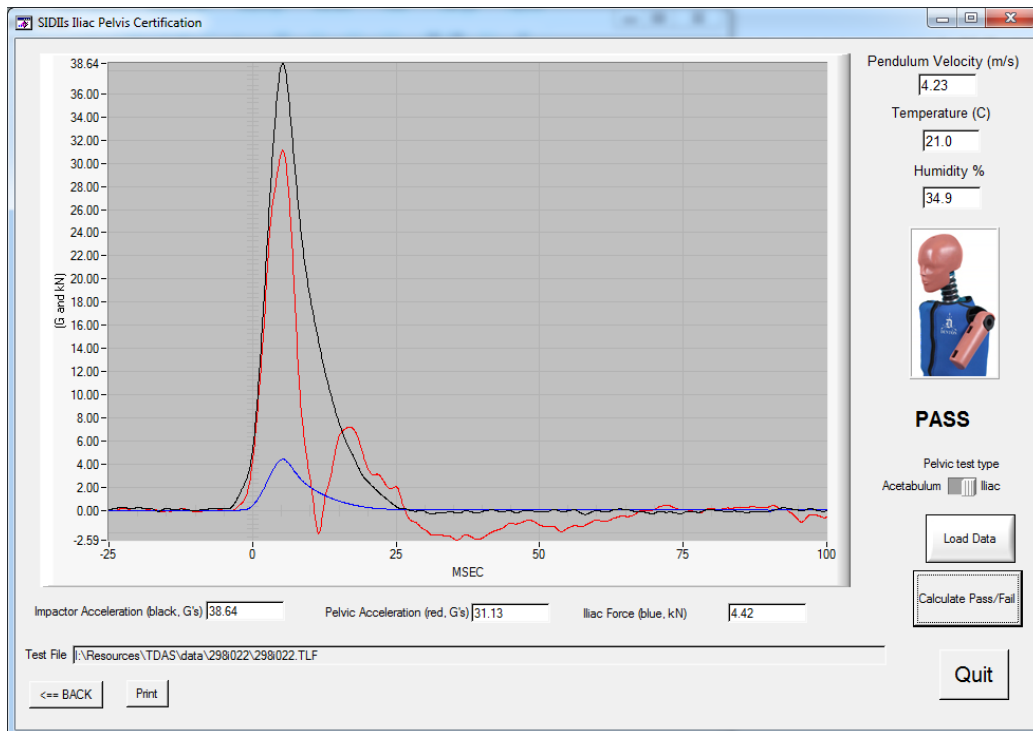

Test Vehicle: 2014 Jeep Patriot 5-Door SUV
Test Program: SINCAP

NHTSA Number: M20140308
Test Date: November 13, 2013

APPENDIX D
TEST EQUIPMENT AND INSTRUMENTATION CALIBRATION DATA

TABLE 1 - DUMMY INSTRUMENTATION – ES-IIRE					
		ES-IIre S/N: F038			
		Serial Number	Manufacturer	Calibration Date	
Head Accelerometers		X	P24165	Endevco	28/Nov/2013
		Y	P25036	Endevco	15/June/2013
		Z	P21704	Endevco	15/June/2013
		X _R	12120	Endevco	15/June/2013
		Y _R	12093	Endevco	06/Aug/2013
		Z _R	12097	Endevco	15/June/2013
Thoracic Rib Displacement Potentiometers	Upper	Y	224	Honeywell	02/May/2013
	Middle	Y	193	Honeywell	02/May/2013
	Lower	Y	191	Honeywell	02/May/2013
Abdomen Load Cells	Forward	Y	1502	Denton	07/May/2013
	Middle	Y	1511	Denton	07/May/2013
	Rear	Y	1537	Denton	07/May/2013
Lower Spine Accelerometers (T ₁₂)		X	P19287	Endevco	15/June/2013
		Y	P21575	Endevco	25/Aug/2013
		Z	P21732	Endevco	15/June/2013
Pubic Symphosis Load Cell		Y	460	Denton	07/May/2013

TABLE 2 - DUMMY INSTRUMENTATION – SID-IIS								
			SID-IIs S/N: 298					
			Serial Number	Manufacturer	Calibration Date			
Head Accelerometers			X	P59221	Endevco	15/Oct/2013		
			Y	P22311	Endevco	25/Aug/2013		
			Z	P23582	Endevco	25/Aug/2013		
			X _R	12099	Endevco	15/June/2013		
			Y _R	12103	Endevco	28/May/2013		
			Z _R	12108	Endevco	15/June/2013		
Displacement Potentiometers		Shoulder		Y				
		Thoracic Rib		Upper	Y	1181	FTSS	02/May/2013
				Middle	Y	1203	FTSS	02/May/2013
				Lower	Y	1215	FTSS	03/May/2013
		Abdominal Rib		Upper	Y	717	FTSS	03/May/2013
				Lower	Y	486	FTSS	03/May/2013
Lower Spine Accelerometers (T ₁₂)			X	P21586	Endevco	25/Aug/2013		
			Y	P21673	Endevco	25/Aug/2013		
			Z	P24682	Endevco	25/Aug/2013		
Acetabulum Load Cell			Y	114	FTSS	07/May/2013		
Iliac Wing Load Cell			Y	283	Denton	22/Aug/2013		
Pelvis Plug (Struck-Side)					FTSS			
Pelvis Plug (Non-Struck-Side)					FTSS			

TABLE 3 - VEHICLE INSTRUMENTATION					
			Serial Number	Manufacturer	Calibration Date
1	Vehicle Center of Gravity	X	P25041	Endevco	15/Oct/2013
	Vehicle Center of Gravity	Y	P21689	Endevco	15/Oct/2013
	Vehicle Center of Gravity	Z	P24138	Endevco	15/Oct/2013
2	Right Sill at Front Seat	X	A011321	MSI	15/Oct/2013
	Right Sill at Front Seat	Y	A011331	MSI	15/Oct/2013
	Right Sill at Front Seat	Z	A011312	MSI	15/Oct/2013
3	Right Sill at Rear Seat	X	P22993	Endevco	15/Oct/2013
	Right Sill at Rear Seat	Y	P23020	Endevco	15/Oct/2013
	Right Sill at Rear Seat	Z	P22965	Endevco	15/Oct/2013
4	Left Sill at Front Door	Y	A086967	MSI	22/Sept/2013
5	Left Sill at Rear Door	Y	A119063	MSI	24/Sept/2013
6	Left A-Post Lower	Y	A086968	MSI	15/Oct/2013
7	Left A-Post Middle	Y	A119065	MSI	24/Sept/2013
8	Left B-Post Lower	Y	98H98H14-F53	Entran	13/May/2013
9	Left B-Post Middle	Y	P24089	Endevco	13/May/2013
10	Front Seat Track	Y	J44021	Endevco	28/May/2013
11	Rear Seat Track or Structure	Y	A007267	MSI	15/Oct/2013
12	Right Rear Occ. Compartment	Y	J43513	Endevco	15/Oct/2013
13	Engine Block	X	12110	Endevco	15/Oct/2013
	Engine Block	Y	A011334	MSI	15/Oct/2013
14	Rear Floorpan Above Axle	X	98G98E11-K02	Endevco	15/Oct/2013
	Rear Floorpan Above Axle	Y	98L98H31-Z05	Endevco	15/Oct/2013
	Rear Floorpan Above Axle	Z	98G98D22-Z15	Endevco	15/Oct/2013

TABLE 4 - MDB INSTRUMENTATION					
			Serial Number	Manufacturer	Calibration Date
MDB Center of Gravity	X		12115	Endevco	22/Oct/2013
MDB Center of Gravity	Y		12149	Endevco	22/Oct/2013
MDB Center of Gravity	Z		P21898	Endevco	22/Oct/2013
Left Frame at Rear Axle Centerline	X		P22339	Endevco	22/Oct/2013
Left Frame at Rear Axle Centerline	Y		P22539	Endevco	22/Oct/2013