


REPORT NUMBER: NCAP-MGA-2016-029

**NEW CAR ASSESSMENT PROGRAM (NCAP)
Frontal Barrier Impact Test**

**FCA ITALY S.p.A.
2016 Jeep Renegade Sport 4x4 5-Dr. SUV
NHTSA No.: M20160310**

**MGA RESEARCH CORPORATION
5000 Warren Road
Burlington, WI 53105**

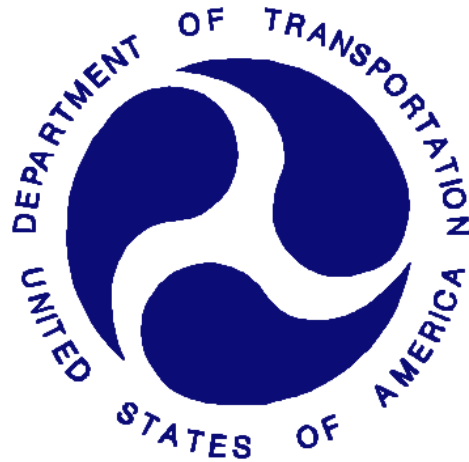

Test Date: January 5, 2016


Final Report Date: January 12, 2016

FINAL REPORT

**U.S. DEPARTMENT OF TRANSPORTATION
National Highway Traffic Safety Administration
Office of Crashworthiness Standards
Mail Code: NRM-110
1200 New Jersey Ave, SE
Room W43-410
Washington, DC 20590**

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: 
Ben Fischer, Project Engineer

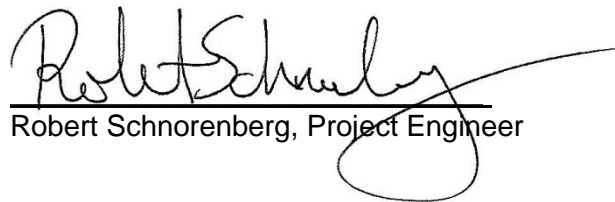Approved by: 
Robert Schnorenberg, Project Engineer

Approval Date: February 17, 2016

FINAL REPORT ACCEPTANCE BY OCWS:

Division Chief, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

COTR, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

Technical Report Documentation Page

1. Report No. NCAP-MGA-2016-029	2. Government Accession No.	3. Recipient's Catalog No.																																																					
4. Title and Subtitle Final Report of New Car Assessment Program Frontal Impact Testing of a 2016 Jeep Renegade Sport 4x4 5-Dr. SUV, NHTSA No.: M20160310		5. Report Date January 12, 2016																																																					
		6. Performing Organization Code MGA																																																					
7. Author(s) Ben Fischer, Project Engineer		8. Performing Organization Report No. NCAP-MGA-2016-029																																																					
9. Performing Organization Name and Address MGA Research Corporation 5000 Warren Road Burlington, WI 53105		10. Work Unit No.																																																					
		11. Contract or Grant No. DTNH22-12-D-00258																																																					
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards (NRM-110) 1200 New Jersey Ave, SE, Room W43-410 Washington, D.C. 20590		13. Type of Report and Period Covered Final Test Report January 5, 2016 to January 12, 2016																																																					
		14. Sponsoring Agency Code NRM-110																																																					
15. Supplementary Notes																																																							
<p>16. Abstract</p> <p>A 56.3 km/h NCAP Frontal Impact Test was conducted on a 2016 Jeep Renegade Sport 4x4 5-Dr. SUV in accordance with the specifications of the Office of Crashworthiness Standards Frontal NCAP Laboratory Test Procedure. This test was conducted to obtain data indicant of FMVSS 208, 212, 219 (partial), and 301 performance. The test was conducted at MGA Research Corporation in Burlington, Wisconsin on January 5, 2016.</p> <p>The impact velocity of the vehicle was 56.30 km/h and the ambient temperature at the barrier face at the time of impact was 21.8°C. The target vehicle post-test maximum crush was 287mm located to the right of the vehicle's centerline. The test vehicle's performance was as follows:</p>																																																							
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Measurement Description</th> <th rowspan="2">Units</th> <th colspan="2">Driver ATD</th> <th colspan="2">Passenger ATD</th> </tr> <tr> <th>Threshold</th> <th>Result</th> <th>Threshold</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC₁₅)</td> <td>N/A</td> <td>700</td> <td style="background-color: yellow;">207</td> <td>700</td> <td style="background-color: yellow;">363</td> </tr> <tr> <td>Maximum Chest</td> <td>mm</td> <td>63</td> <td style="background-color: yellow;">28</td> <td>52</td> <td style="background-color: yellow;">19</td> </tr> <tr> <td>Nij</td> <td>N/A</td> <td>1</td> <td style="background-color: yellow;">0.26</td> <td>1</td> <td style="background-color: yellow;">0.35</td> </tr> <tr> <td>Neck Tension</td> <td>N</td> <td>4170</td> <td style="background-color: yellow;">1475</td> <td>2620</td> <td style="background-color: yellow;">982</td> </tr> <tr> <td>Neck Compression</td> <td>N</td> <td>4000</td> <td style="background-color: yellow;">80</td> <td>2520</td> <td style="background-color: yellow;">208</td> </tr> <tr> <td>Left Femur Force</td> <td>N</td> <td>10008</td> <td style="background-color: yellow;">1524</td> <td>6805</td> <td style="background-color: yellow;">1292</td> </tr> <tr> <td>Right Femur Force</td> <td>N</td> <td>10008</td> <td style="background-color: yellow;">1629</td> <td>6805</td> <td style="background-color: yellow;">1431</td> </tr> </tbody> </table>				Measurement Description	Units	Driver ATD		Passenger ATD		Threshold	Result	Threshold	Result	Head Injury Criteria (HIC ₁₅)	N/A	700	207	700	363	Maximum Chest	mm	63	28	52	19	Nij	N/A	1	0.26	1	0.35	Neck Tension	N	4170	1475	2620	982	Neck Compression	N	4000	80	2520	208	Left Femur Force	N	10008	1524	6805	1292	Right Femur Force	N	10008	1629	6805	1431
Measurement Description	Units	Driver ATD				Passenger ATD																																																	
		Threshold	Result	Threshold	Result																																																		
Head Injury Criteria (HIC ₁₅)	N/A	700	207	700	363																																																		
Maximum Chest	mm	63	28	52	19																																																		
Nij	N/A	1	0.26	1	0.35																																																		
Neck Tension	N	4170	1475	2620	982																																																		
Neck Compression	N	4000	80	2520	208																																																		
Left Femur Force	N	10008	1524	6805	1292																																																		
Right Femur Force	N	10008	1629	6805	1431																																																		
17. Key Words 35 mph Frontal Barrier Impact Test New Car Assessment Program (NCAP)		18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division, NPO-411 1200 New Jersey Ave, SE Washington, DC 20590 Email: tis@nhtsa.dot.gov FAX: 202-493-2833																																																					
19. Security Classification of Report Unclassified	20. Security Classification of Page Unclassified	21. No. of Pages 167	22. Price																																																				

TABLE OF CONTENTS

<u>Section</u>		<u>Page No.</u>
1	Purpose and Summary of Test	1
2	Occupant and Vehicle Information / Data Sheets	3

<u>Data Sheet No.</u>		<u>Page No.</u>
1	General Test and Vehicle Parameter Data	4
2	Seat Adjustment, Fuel System, and Steering Wheel Data	8
3	Dummy Longitudinal Clearance Dimensions	10
4	Dummy Lateral Clearance Dimensions	11
5	Seat Belt Positioning Data	12
6	High-Speed Camera Locations and Data	13
7	Vehicle Accelerometer Locations	15
8	Photographic Reference Target Locations	16
9	Load Cell Locations on Fixed Barrier	17
10	Test Vehicle Summary of Results	18
11	Post-Test Observations	19
12	Vehicle Profile Measurements	20
13	Accident Investigation Division Data	22
14	Vehicle Intrusion Measurements	23
15	Summary of FMVSS 212, FMVSS 219 (Partial) Data, and 301 Data	25
16	FMVSS 301 Static Rollover Results	27
17	Dummy/Vehicle Temperature Stabilization Data	28

<u>Appendix</u>		
A	Photographs	A
B	Dummy Response Data Traces	B
C	Dummy Calibration and Performance Verification Data	C

SECTION 1 PURPOSE AND SUMMARY OF TEST

PURPOSE

This 56.3 km/h frontal barrier impact test is part of the Vehicle Barrier Impact Testing Program sponsored by the National Highway Traffic Safety Administration (NHTSA) under contract number DTNH22-12-D-00258. The purpose of this test was to obtain vehicle crashworthiness and occupant restraint system performance data for consumer information purposes.

The 56.3 km/h frontal barrier impact was conducted in accordance with the Office of Crashworthiness Standards Frontal NCAP Laboratory Test Procedure.

SUMMARY

A load cell barrier consisting of 176 load cells was impacted by a 2016 Jeep Renegade Sport 4x4 5-Dr. SUV at a velocity of 56.30 km/h. The test was performed at MGA Research Corporation on January 5, 2016. Pre-test and post-test photographs of the vehicle and dummies can be found in Appendix A.

Two (2) real-time cameras and fourteen (14) high-speed cameras were used to document the frontal barrier impact event. Camera locations and other pertinent camera information can be found in this report.

One Part 572E 50th percentile male anthropomorphic test device (ATD), was placed in the driver seating position and one Part 572O 5th percentile female test device (ATD) was placed in the right-front passenger seating position according to dummy placement instructions specified in the Frontal NCAP Laboratory Test Procedure.

Both ATDs were fully instrumented with head, chest and pelvis tri-axial accelerometers, chest displacement potentiometers, upper neck transducers, right/left femur load cells, and lower leg instrumentation. Seat belt load cells were also installed on the driver's shoulder belt, driver's lap belt, passenger's shoulder belt, and passenger's lap belt to measure dummy torso section loading.

The driver (position 1) ATD (Serial No. 351) and the right-front passenger (position 2) ATD (Serial No. 634) were calibrated previous to this test. Certification details, along with instrumentation calibration data, are found in Appendix C of this report.

The 634 channels of data were recorded on a data acquisition system. Appendix B contains the dummy response data traces.

There was 100 percent windshield retention and no intrusion into the protected zone of the windshield during the event. There was no Stoddard Solvent leakage after the event or during any phase of the static rollover.

The maximum static crush of the vehicle was 287 mm to the right of the vehicle centerline and both the driver and passenger side doors remained closed during the impact event and were operable after the impact.

The driver's visible contact points were as follows: The driver's head contacted the airbag. The driver's head also contacted the headrest. The driver's knees contacted the knee airbag. The passenger's visible contact points were as follows: The passenger's head contacted the airbag. The passenger's head also contacted the headrest. The passenger's knees contacted the glove box.

The occupant data is summarized below:

ATD position	HIC ₁₅	Nij	Neck Tension (N)	Neck Comp. (N)	3ms Chest Clip (Gs)	Chest Disp. (mm)	Left Femur (N)	Right Femur (N)
Driver (50 th)	207	0.26	1475	80	34	28	1524	1629
Passenger (5 th)	363	0.35	982	208	40	19	1292	1431

The test data can be found on the NHTSA website at www.nhtsa.dot.gov.

TEST NOTES

Barrier K-16 My has no valid data.
 Barrier C-04 Fx has no valid data.
 Barrier C-04 My has no valid data.
 Barrier C-04 Mz has no valid data.

MGA does not endorse or certify products. The manufacturer's name appears solely for identification purposes.

SECTION 2
OCCUPANT AND VEHICLE INFORMATION / DATA SHEETS

**DATA SHEET NO. 1
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
 Test Date: 1/5/2016

TEST VEHICLE INFORMATION AND OPTIONS

NHTSA No.	M20160310	Traction Control System (TCS)	Yes
Model Year	2016	Power Steering	Yes
Make	Jeep	Power Window Auto-Reverse	No
Model	Renegade	Driver Frontal Airbag	Yes
Body Style	5-Door SUV	Driver Curtain Airbag	Yes
VIN	ZACCJBAWXGPC45322	Driver Head/Torso Airbag	No
Body Color	Colorado Red	Driver Torso Airbag	No
Odometer (km/mi)	240km / 149mi	Driver Torso/Pelvis Airbag	Yes
Engine Displacement (L)	1.4	Driver Pelvis Airbag	No
Type/No. Cylinders	4	Driver Knee Airbag	Yes
Engine Placement	Lateral	Front Pass. Frontal Airbag	Yes
Transmission Type	Manual	Front Pass. Curtain Airbag	Yes
Transmission Speeds	6	Front Pass. Head/Torso Airbag	No
Overdrive	Yes	Front Pass. Torso Airbag	No
Final Drive	AWD	Front Pass. Torso/Pelvis Airbag	Yes
Roof Rack	No	Front Pass. Pelvis Airbag	No
Sunroof/T-Top	No	Front Pass. Knee Airbag	No
Running Boards	No	Driver Pretensioner	Yes
Tilt Steering Wheel	Yes	Driver Load Limiter	Yes
Power Seats	No	Front Pass. Pretensioner	Yes
Anti-Lock Brakes (ABS)	Yes	Front Pass. Load Limiter	Yes
Automatic Door Locks (ADLs)	Yes	Other	N/A

Does owner's manual provide instructions to turn off automatic door locks?	No
--	----

DATA FROM CERTIFICATION LABEL

Manufactured By	FCA ITALY S.p.A.	GVWR (kg)	2080
Date of Manufacture	09/15	GAWR Front (kg)	1150
		GAWR Rear (kg)	1000

VEHICLE SEATING AND WEIGHT CAPACITY DATA


Measured Parameter	Front	Rear	Third	Total
Type of Seats	Bucket	Contoured		
Designated Seating Capacity (DSC)	2	3		5
Capacity Weight (VCW) (kg)				512
Cargo Weight (RCLW) (kg)				136

**DATA SHEET NO. 1 (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
 Test Date: 1/5/2016

VEHICLE TIRE INFORMATION

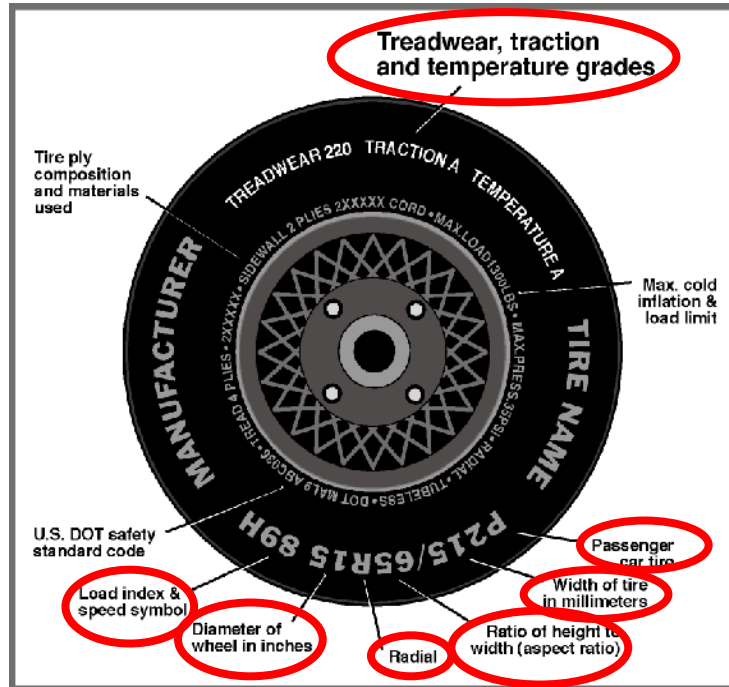

Measured Parameter	Front	Rear
Max. Tire Pressure (kPa)	275	275
Cold Pressure (kPa)	240	240
Recommended Tire Size	215/65R16	215/65R16
Tire Size on Vehicle	215/65R16	215/65R16
Tire Manufacturer	Continental	Continental
Tire Model	Cross Contact	Cross Contact
Treadwear	480	480
Traction	A	A
Temperature Grade	A	A
Tire Plies Sidewall	1 Rayon	1 Rayon
Tire Plies Body	1 Rayon, 2 Steel, 2 Polyamide	1 Rayon, 2 Steel, 2 Polyamide
Load Index/Speed Symbol	98H	98H
Tire Material	Rubber	Rubber
DOT Safety Code Left	HW6V D3PA 3515	HW6V D3PA 3415
DOT Safety Code Right	HW6V D3PA 3415	HW6V D3PA 3515

**DATA SHEET NO. 1 (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
 Test Date: 1/5/2016

TEST VEHICLE WEIGHTS

	Units	As Delivered (UVW)			As Tested (ATW)		
		Front	Rear	Total	Front	Rear	Total
Left	kg	431.5	313.5		466.5	418.5	
Right	kg	421.5	294.5		453.0	392.0	
Ratio	%	58.4	41.6		53.2	46.8	
Totals	kg	853.0	608.0	1461.0	919.5	810.5	1730.0

TARGET TEST WEIGHT CALCULATION

Measured Parameter	Units	Value
Total Delivered Weight (UVW)	kg	1461.0
Weight of 1 P572E ATD & 1 P572O ATD	kg	141
Rated Cargo/Luggage Weight (RCLW)	kg	136
Calculated Test Vehicle Target Weight (TVTW)	kg	1738.0

TEST VEHICLE ATTITUDES AND CG

	Units	LF	RF	LR	RR	CG (aft of front axle)
As Delivered	mm	789	785	770	782	1067
As Tested	mm	782	784	730	737	1201
Post Test	mm	685	810	688	780	

GENERAL TEST VEHICLE DATA

Measurement Description	Units	Value
Total Vehicle Wheel Base	mm	2564
Total Vehicle Length at Left Side	mm	4043
Total Vehicle Length at Centerline	mm	4232
Total Vehicle Length at Right Side	mm	4043
Weight of Ballast in Cargo Area	kg	46
Weight of Vehicle Components Removed	kg	9
Amount of Stoddard Solvent in Fuel Tank	L	44.7

List of components removed to meet test weight: None.

List of components removed for instrumentation, data box, and equipment installation: Cargo area carpet and trim, LR and RR floor mat, RR tail light, repair kit and compressor.

**DATA SHEET NO. 1 (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
 Test Date: 1/5/2016

TARGET VEHICLE STRUCTURAL MEASUREMENT

	Elements	Pre-Test (mm)
1	Total Length	4232
2	Total Width	1766
3	Bumper Top Height	648
4	Bumper Bottom Height	515
5	Longitudinal Member Top Height	636
6	Distance between Longitudinal Members	945
7	Longitudinal Member Width	70
8	Engine Top Height	885
9	Engine Bottom Height	272
10	Engine and Gearbox Width	765
11	Front Bumper-Engine Distance	302
12	Front Shock Absorber Fixing Height	1010
13	Bonnet Leading Edge Height	1021
14	Front Shock Absorber Fixing Width	65
15	Front Bumper – Front Axle Distance	871
16	Front Axle – A-Pillar Distance	440
17	A-Pillar – B-Pillar Distance	1025
18	B-Pillar – Rear Axle Distance	1090
19	B-Pillar – C-Pillar Distance	655
20	Roof Sill Bottom Height	1566
21	Roof Sill Top Height	1625
22	Floor Sill Bottom Height	332
23	Floor Sill Top Height	440


**DATA SHEET NO. 2
SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA**

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
 Test Date: 1/5/2016

NOMINAL DESIGN RIDING POSITION

The driver seat back is positioned as close as possible to the manufacturer’s design angle. For the passenger seat back, seat back is adjusted following Appendix F, “Driver & Passenger Dummy Seating & Positioning Procedures” in the NCAP Test Procedure dated October 2015.

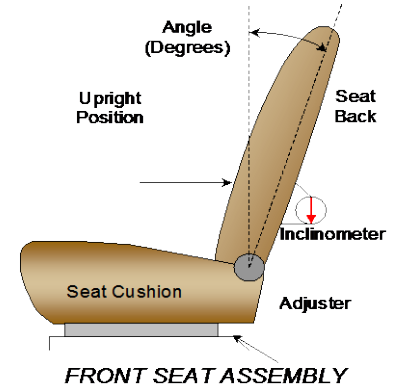

	Degrees
Driver Seat Back Angle	0.2° on headrest post
Passenger Seat Back Angle	-2.9° on headrest post

SEAT FORE/AFT POSITIONS


The driver and passenger seat fore/aft positions are adjusted following Appendix F, “Driver & Passenger Dummy Seating & Positioning Procedures” in the NCAP Test Procedure dated October 2015.

	Total Fore/Aft Travel	Placed in Position #
Driver Seat	290 mm / 24 detents (1 st as 1)	150 mm / 9 th detent (1 st as 0)
Passenger Seat	260 mm / 27 detents (1 st as 1)	0 mm / 0 th detent (1 st as 0)

SEAT BELT UPPER ANCHORAGES

The seat belt upper anchorages are positioning following the manufacturer’s specified position as listed in Form 1.

	Total # of Positions	Placed in Position #
Driver Seat	5 (1 st as 1)	1 (1 st as 0)
Passenger Seat	5 (1 st as 1)	2 (1 st as 0)

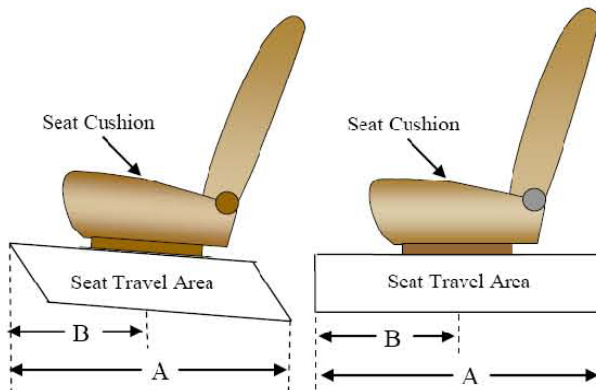

DATA SHEET NO. 2 (CONTINUED)
SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
 Test Date: 1/5/2016


FUEL TANK CAPACITY DATA

	Liters
Usable Capacity of "Standard Tank"	48.1
Usable Capacity of "Optional Tank"	
92-94% of Usable Capacity	44.3 to 45.0
Actual Amount of Solvent used	44.7
1/3 of Usable Capacity	16.0

FUEL PUMP

Describe the fuel pump type, its behavior, and the location of the fuel filler pipe.


The filler neck is located on the driver's side.

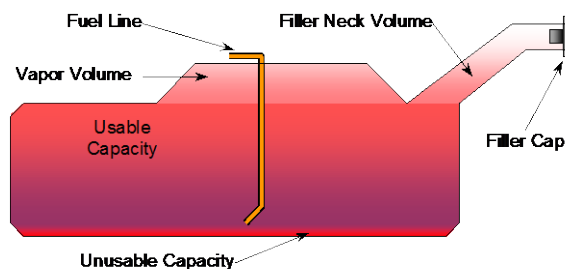

VEHICLE FUEL TANK ASSEMBLY

STEERING COLUMN ADJUSTMENT

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes when moved through its full range of motion. An aluminum plate is placed across the rim of the steering wheel, an inclinometer is placed on the plate and the angle is measured.

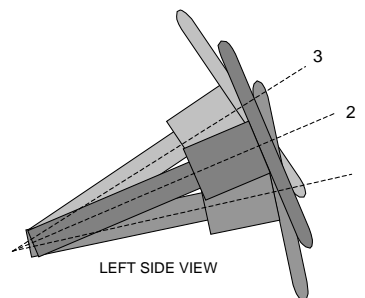

STEERING COLUMN ASSEMBLY


STEERING COLUMN POSITION

	Degrees	Fore/Aft
Lowermost Position 1	67.5	249
Geometric Center	65.0	274
Uppermost Position 3	62.5	299
Telescoping Steering		50
Test Position	65.0	274

**DATA SHEET NO. 3
DUMMY LONGITUDINAL CLEARANCE DIMENSIONS**

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
 Test Date: 1/5/2016

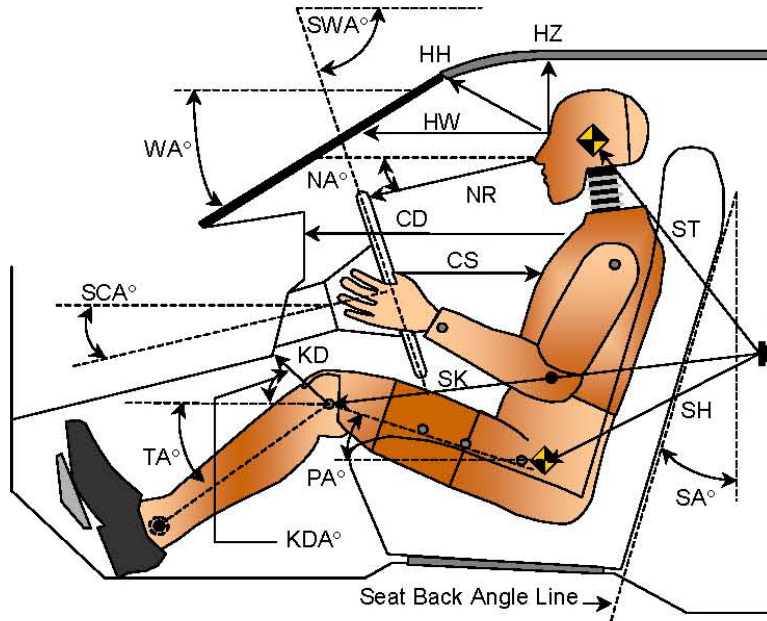


LEFT SIDE VIEW

Code	Measurement Description	Driver		Passenger	
		Length (mm)	Angle (°)	Length (mm)	Angle (°)
WA°	Windshield Angle		33.9		
SWA°	Steering Wheel Angle		65.0		
SCA°	Steering Column Angle		25.0		
SA°	Seat Back Angle (on headrest post)		0.2		-2.9
HZ	Head to Roof (Z)	280	90	314	90
HH	Head to Header	523	23.9	445	31.9
HW	Head to Windshield	808	0	744	0
NR	Nose to Rim	393	3.2		
CD	Chest to Dash	556		372	
CS	Chest to Steering Hub	311	2.4		
RA	Rim to Abdomen	202	0		
KDL	Left Knee to Dash	185	28.8	91	39.9
KDR	Right Knee to Dash	191	29.2	94	39.0
PA°	Pelvic Angle		22.8		21.1
TA°	Tibia Angle		45.6		55.0
SK	Striker to Knee	509	91.6	650	92.7
ST	Striker to Head	520	6.7	497	23.7
SH	Striker to H-Point	195	139.0	328	106.0

**DATA SHEET NO. 4
DUMMY LATERAL CLEARANCE DIMENSIONS**

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
 Test Date: 1/5/2016

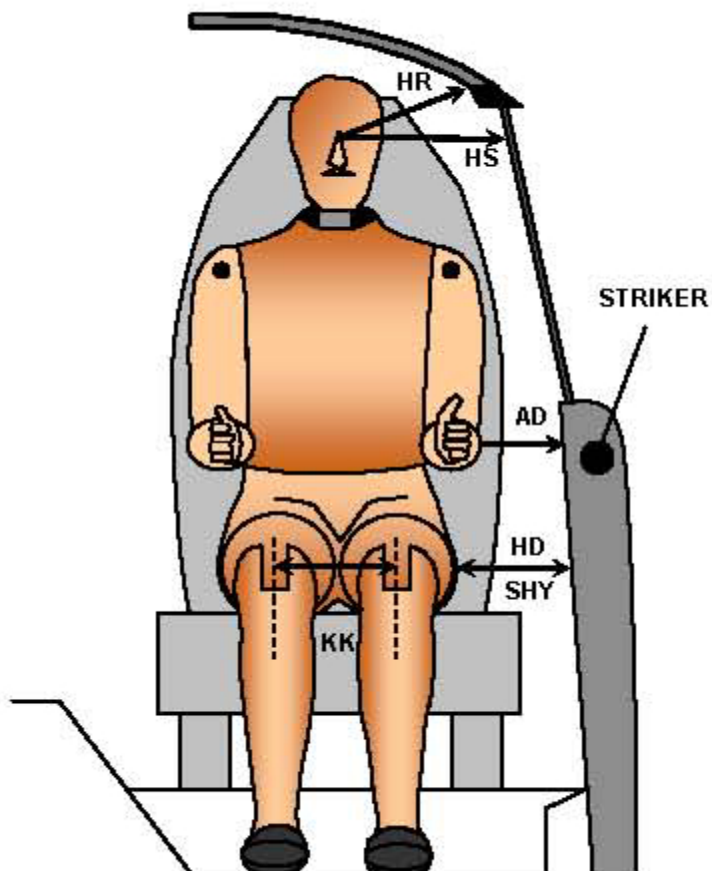


FRONT VIEW OF DUMMY

Code	Measurement Description	Driver	Passenger
		Length (mm)	
AD	Arm to Door	147	113
HD	H-Point to Door	153	178
HR	Head to Side Header	280	303
HS	Head to Side Window	378	392
KK	Knee to Knee	340	226
SHY	Striker to H-Point (Y Direction)	300	328
AA	Ankle to Ankle	299	154

**DATA SHEET NO. 5
SEAT BELT POSITIONING DATA**

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
 Test Date: 1/5/2016

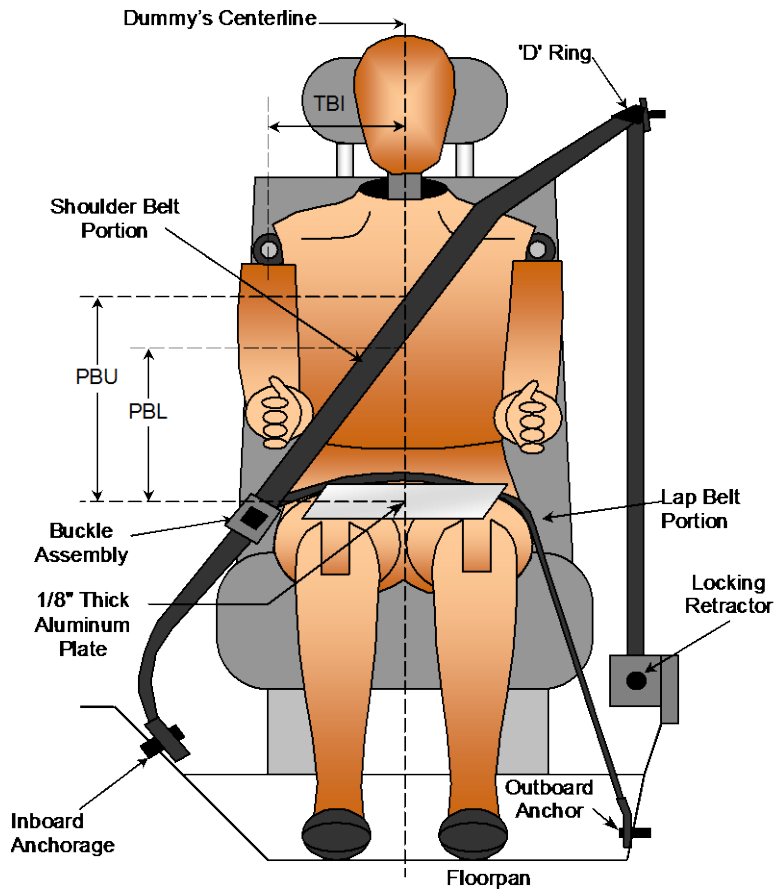

FRONT VIEW OF DUMMY

SEAT BELT POSITIONING MEASUREMENTS

Measurement Description	Units	Driver	Passenger
PBU - Top surface of reference to belt upper edge	mm	335	320
PBL - Top surface of reference to belt lower edge	mm	260	235

BELT LENGTH DATA


Measurement Description	Units	Driver	Passenger
Shoulder Belt Length as measured on ATD	mm	870	945
Lap Belt Length as measured on ATD	mm	690	815
Remainder of belt on reel	mm	890	690
Total Belt Length for Continuous Webbing Systems	mm	3200	3200

**DATA SHEET NO. 6
HIGH-SPEED CAMERA LOCATIONS AND DATA**

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
Test Date: 1/5/2016

CAMERA POSITIONS FOR FRONTAL IMPACTS

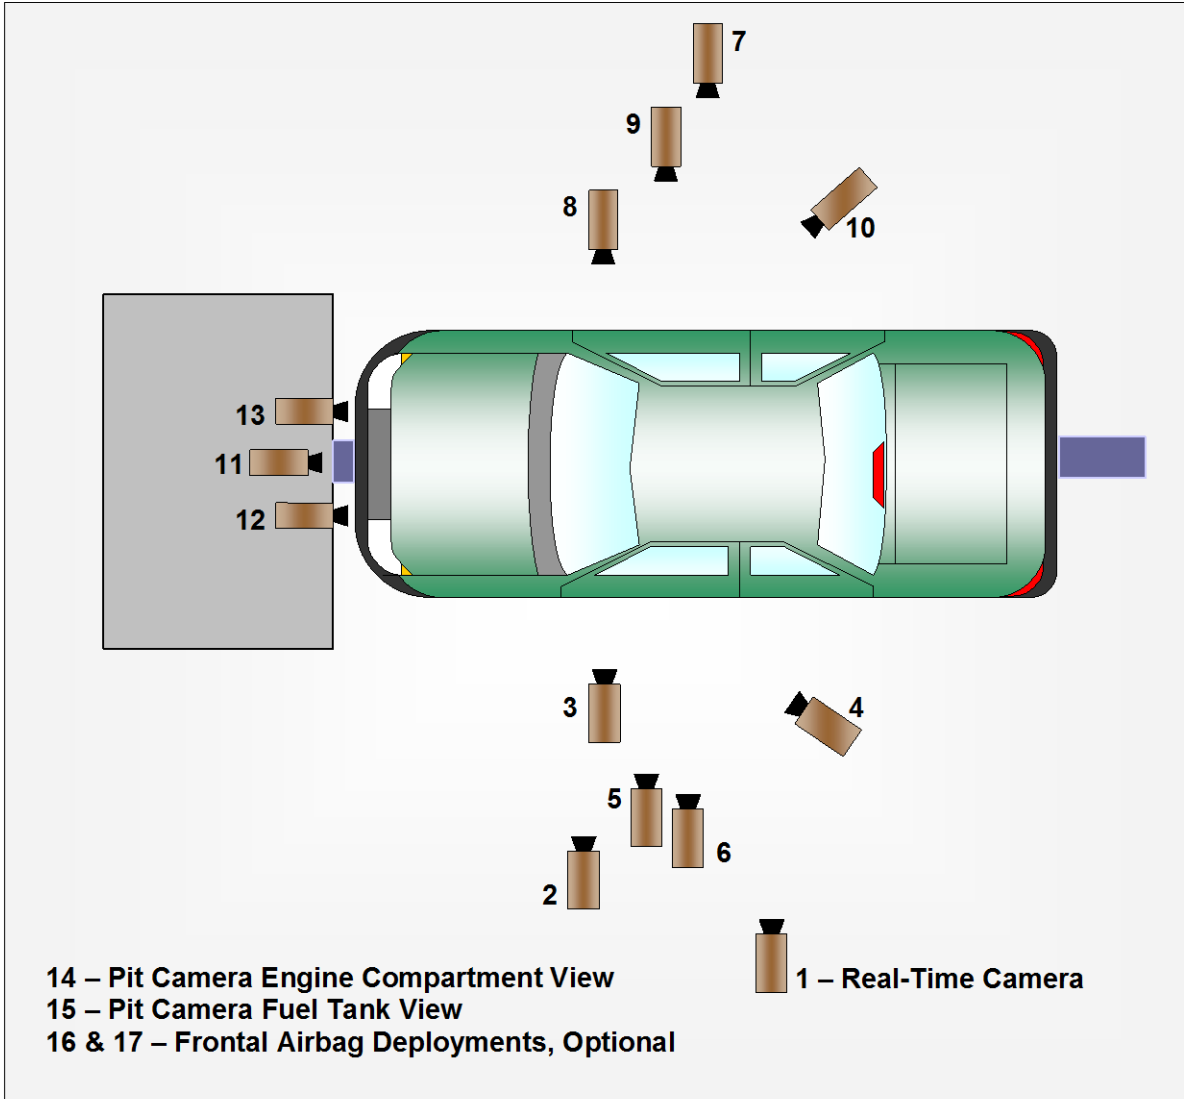

**DATA SHEET NO. 6 (CONTINUED)
CAMERA LOCATIONS AND DATA**

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
 Test Date: 1/5/2016

CAMERA LOCATIONS

No.	Camera View	Coordinates (mm)			Lens (mm)	Speed (fps)
		X*	Y*	Z*		
1	Real-Time Left Overall					30
2	Driver Close-Up	-1260	-6270	-1950	35	1000
3	Left Front Half	-820	-5320	-1220	24	1000
4	Left Angle	-6000	-5070	-1940	50	1000
5	Steering Column - Top					
6	Steering Column - Bottom					
7	Right Overall	-2060	6370	-1230	20	1000
8	Passenger Close-Up	-1510	6190	-1990	35	1000
9	Right Front Half	-1120	5320	-1220	24	1000
10	Right Angle	-5990	5020	-1970	50	1000
11	Windshield	430	0	-2810	20	1000
12	Driver Windshield	30	-450	-2030	8.5	1000
13	Passenger Windshield	30	450	-2030	8.5	1000
14	Pit Front	-1060	0	3150	24	1000
15	Pit Rear	-3110	0	3150	24	1000
16	Onboard Driver Side				12	1000
17	Onboard Passenger Side				12	1000
18	Real-Time Pan View					30

***COORDINATES:**



- +X = forward of impact plane
- +Y = right of monorail centerline
- +Z = below ground level

Cameras 5 & 6 were not used for this test.

**DATA SHEET NO. 7
VEHICLE ACCELEROMETER LOCATIONS**

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
 Test Date: 1/5/2016

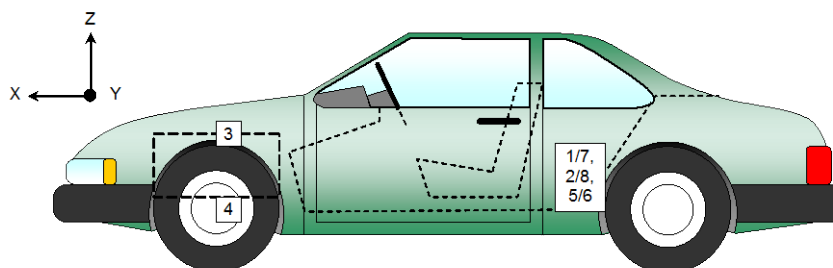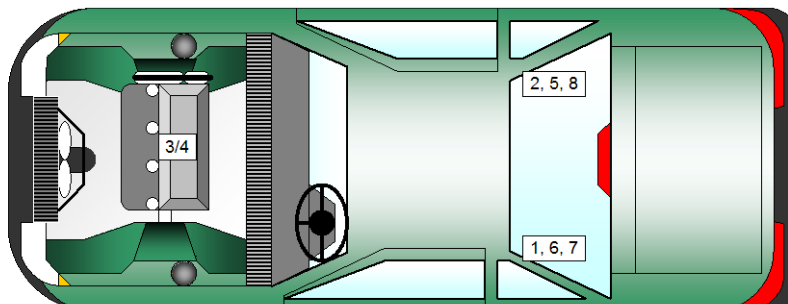

VEHICLE ACCELEROMETER PRE-TEST LOCATIONS

No.	Accelerometer Location	Measurements (mm)		
		X	Y	Z
1	Left Rear Crossmember Accelerometer – X Direction	1574	-363	-312
2	Right Rear Crossmember Accelerometer – X Direction	1574	363	-328
3	Engine Top X	3554	0	-883
4	Engine Bottom X	3472	129	-261
5	Left Rear Crossmember Accelerometer – Z Direction	1574	-363	-312
6	Right Rear Crossmember Accelerometer – Z Direction	1574	363	-328
7	Left Rear Crossmember Accelerometer Redundant – X Direction	1624	-363	-312
8	Right Rear Crossmember Accelerometer Redundant – X Direction	1624	363	-328




Reference Points: X - Rear Surface of Vehicle (+ forward)
 Y - Vehicle Centerline (+ to right)
 Z - Ground Plane (+ down)

DATA SHEET NO. 8
PHOTOGRAPHIC REFERENCE TARGET LOCATIONS

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
 Test Date: 1/5/2016

Item	Value (mm)
A	340
B	883
C	2285
D	612
E	1335
F	100
G	
H	987
I	1327
J	845
K	845
L	1228
M	987
N	1228
O	845
P	845
Q	1327

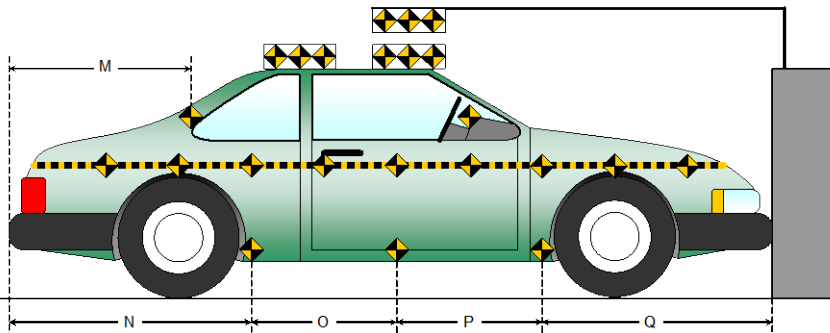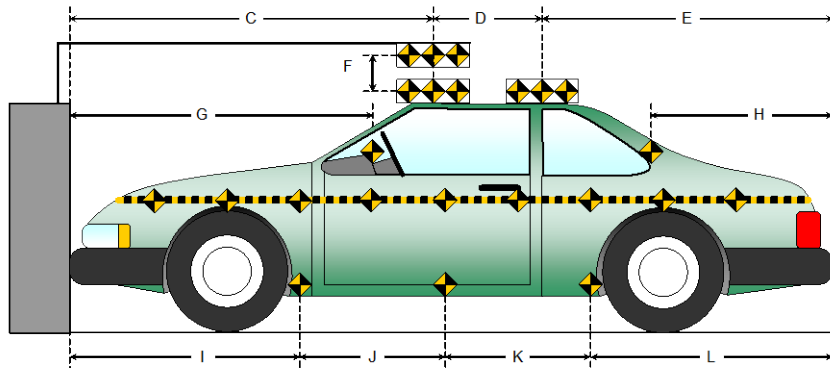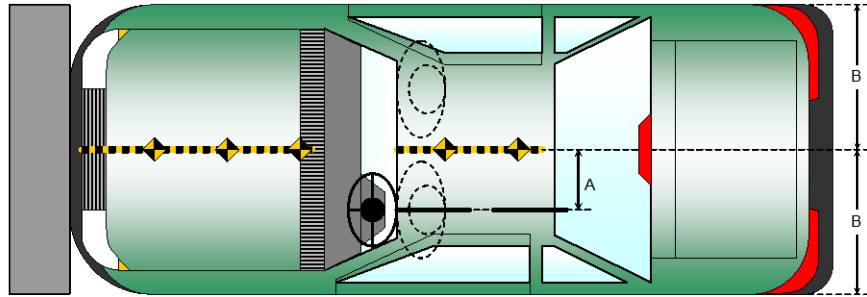

**DATA SHEET NO. 9
LOAD CELL LOCATIONS ON FIXED BARRIER**

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
 Test Date: 1/5/2016

Advanced Research Load Cell Barrier

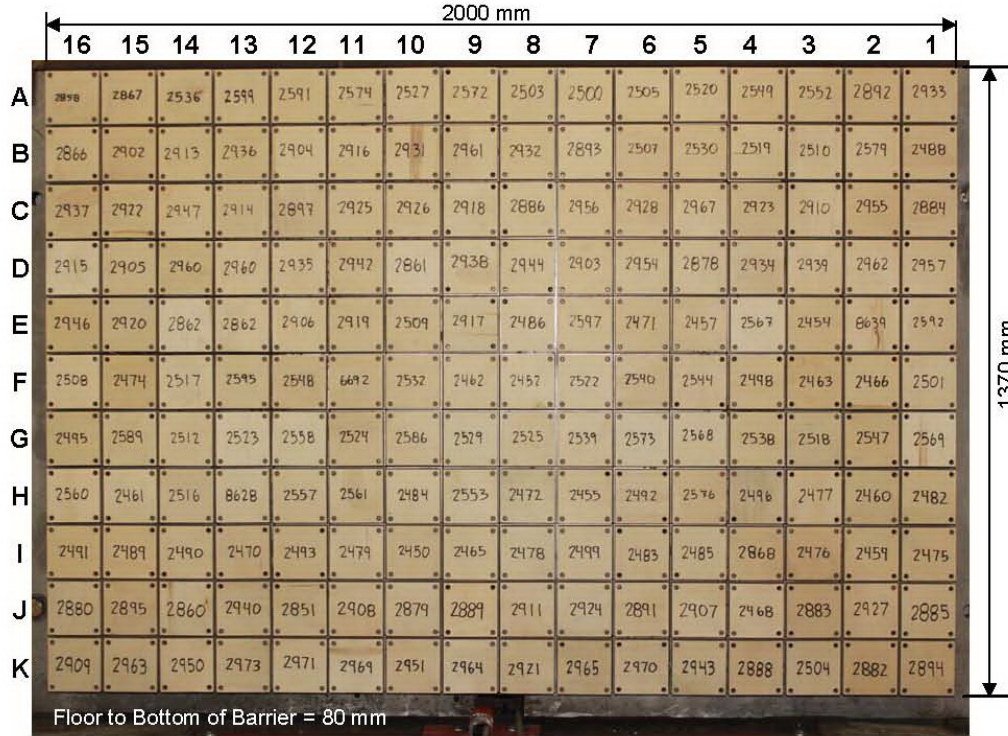


Photo for Reference Only

Centerline															
A-16	A-15	A-14	A-13	A-12	A-11	A-10	A-09	A-08	A-07	A-06	A-05	A-04	A-03	A-02	A-01
B-16	B-15	B-14	B-13	B-12	B-11	B-10	B-09	B-08	B-07	B-06	B-05	B-04	B-03	B-02	B-01
C-16	C-15	C-14	C-13	C-12	C-11	C-10	C-09	C-08	C-07	C-06	C-05	C-04	C-03	C-02	C-01
D-16	D-15	D-14	D-13	D-12	D-11	D-10	D-09	D-08	D-07	D-06	D-05	D-04	D-03	D-02	D-01
E-16	E-15	E-14	E-13	E-12	E-11	E-10	E-09	E-08	E-07	E-06	E-05	E-04	E-03	E-02	E-01
F-16	F-15	F-14	F-13	F-12	F-11	F-10	F-09	F-08	F-07	F-06	F-05	F-04	F-03	F-02	F-01
G-16	G-15	G-14	G-13	G-12	G-11	G-10	G-09	G-08	G-07	G-06	G-05	G-04	G-03	G-02	G-01
H-16	H-15	H-14	H-13	H-12	H-11	H-10	H-09	H-08	H-07	H-06	H-05	H-04	H-03	H-02	H-01
I-16	I-15	I-14	I-13	I-12	I-11	I-10	I-09	I-08	I-07	I-06	I-05	I-04	I-03	I-02	I-01
J-16	J-15	J-14	J-13	J-12	J-11	J-10	J-09	J-08	J-07	J-06	J-05	J-04	J-03	J-02	J-01
K-16	K-15	K-14	K-13	K-12	K-11	K-10	K-09	K-08	K-07	K-06	K-05	K-04	K-03	K-02	K-01

Load Cells are 121 mm x 121 mm with a 7 mm gap in between each load cell.

DATA SHEET NO. 10
TEST VEHICLE SUMMARY OF RESULTS

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
Test Date: 1/5/2016

INSTRUMENTATION

Driver Dummy Data Channels	49
Passenger Dummy Data Channels	49
Vehicle Structure Accelerometers	8
Barrier Channels	528
Total	634

CAMERA COVERAGE

High-Speed Vehicle Onboard	2
High-Speed Offboard	12
Real-Time	2
Total	16

**DATA SHEET NO. 11
POST-TEST OBSERVATIONS**

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
 Test Date: 1/5/2016

TEST DUMMY INFORMATION AND CONTACT LOCATIONS

Description	Driver	Passenger
Dummy Type / Serial No.	HIII 50% / 351	HIII 5% / 634
Head Contact	Airbag, Headrest	Airbag, Headrest
Upper Torso Contact	Airbag	Airbag
Lower Torso Contact	None	None
Left Knee Contact	Knee Airbag	Glove Box
Right Knee Contact	Knee Airbag	Glove Box

DOOR OPENING AND SEAT TRACK INFORMATION

Description	Driver	Passenger
Locked/Unlocked Doors	Doors were locked	Doors were locked
Front Door Opening	Door remained closed and latched; Door opened without tools	Door remained closed and latched; Door opened without tools
Rear Door Opening	Door remained closed and latched; Door opened without tools	Door remained closed and latched; Door opened without tools
Seat Track Shift (mm)	0	0
Seat Back Failure	None	None

POST TEST STRUCTURAL OBSERVATIONS

Critical Areas of Performance	Observations and Conclusions
Windshield Damage	Cracked
Window Damage	None
Other Notable Effects	None

VEHICLE REBOUND FROM BARRIER

Measured Parameter	Units	Value
Left Side	mm	1135
Center	mm	1040
Right Side	mm	1100
Average	mm	1092


SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION

Restraint Type	Driver (Occupant 1)		Passenger (Occupant 2)	
	Mounted	Deployed	Mounted	Deployed
Frontal Airbag	Yes	Yes	Yes	Yes
Curtain Side Airbag	Yes	No	Yes	No
Torso/Pelvis Side Airbag	Yes	No	Yes	No
Knee Airbag	Yes	Yes	No	
Seat Belt Pretensioner	Yes	Yes	Yes	Yes
Seat Belt Load Limiter	Yes		Yes	

DATA SHEET NO. 12 VEHICLE PROFILE MEASUREMENTS

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
 Test Date: 1/5/2016

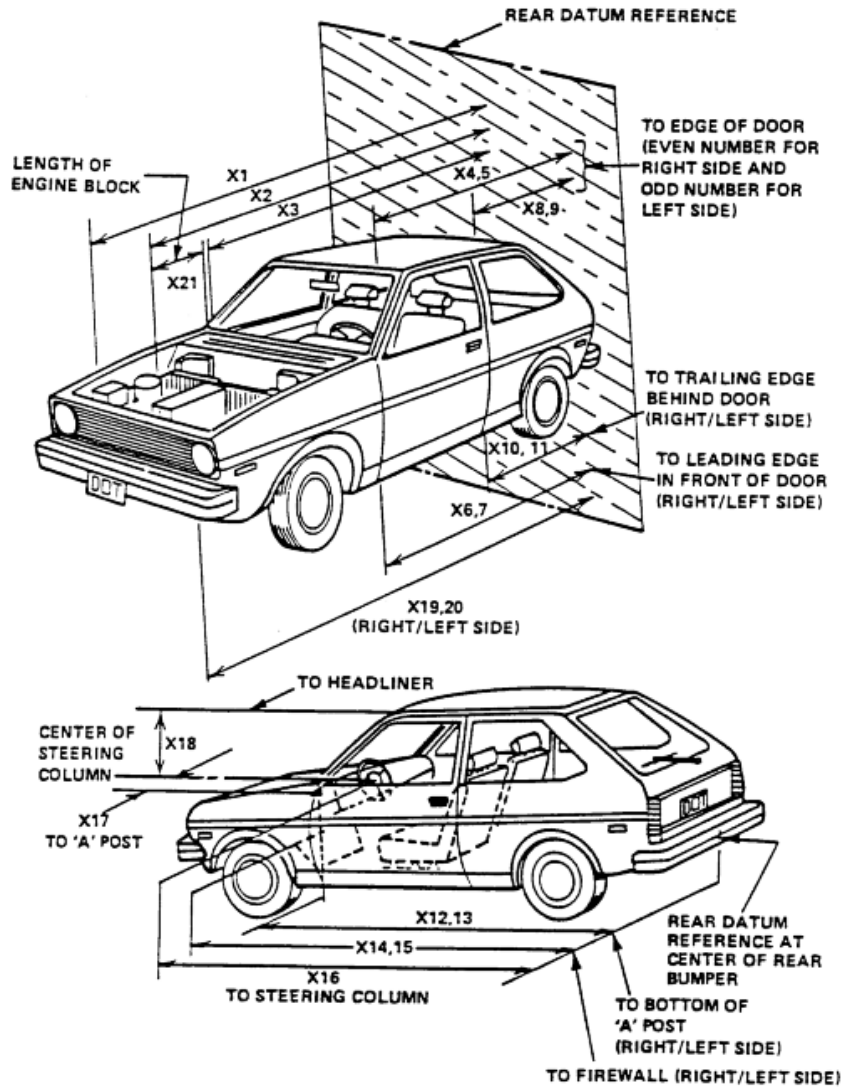

**DATA SHEET NO. 12 (CONTINUED)
VEHICLE PROFILE MEASUREMENTS**

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
Test Date: 1/5/2016

RSOV (Rear Surface of Vehicle)

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
1	Total Length of Vehicle at Centerline	mm	4232	3947	285
2	RSOV to Front of Engine	mm	3810	3626	184
3	RSOV to Firewall	mm	3358	3229	129
4	RSOV to Upper Leading Edge of Right Door	mm	2814	2820	-6
5	RSOV to Upper Leading Edge of Left Door	mm	2814	2814	0
6	RSOV to Lower Leading Edge of Right Door	mm	2830	2820	10
7	RSOV to Lower Leading Edge of Left Door	mm	2830	2818	12
8	RSOV to Upper Trailing Edge of Right Door	mm	1805	1824	-19
9	RSOV to Upper Trailing Edge of Left Door	mm	1805	1819	-14
10	RSOV to Lower Trailing Edge of Right Door	mm	1865	1870	-5
11	RSOV to Lower Trailing Edge of Left Door	mm	1865	1852	13
12	RSOV to Bottom of "A" Post of Right Side	mm	2855	2843	12
13	RSOV to Bottom of "A" Post of Left Side	mm	2855	2852	3
14	RSOV to Firewall, Right Side	mm	3425	3347	78
15	RSOV to Firewall, Left Side	mm	3418	3335	83
16	RSOV to Steering Column	mm	2392	2454	-62
17	Center of Steering Column to "A" Post	mm	425	422	3
18	Center of Steering Column to Headliner	mm	500	511	-11
19	RSOV to Right Side of Front Bumper	mm	4043	3885	158
20	RSOV to Left Side of Front Bumper	mm	4043	3791	252
21	Length of Engine Block	mm	320	320	0
RD	RSOV to Right Side of Dash Panel	mm	2568	2598	-30
CD	RSOV to Center of Dash Panel	mm	2570	2590	-20
LD	RSOV to Left Side of Dash Panel	mm	2611	2599	12

DATA SHEET NO. 13
ACCIDENT INVESTIGATION DIVISION DATA

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
Test Date: 1/5/2016

VEHICLE INFORMATION

VIN: ZACCJBAWXGPC45322 Wheelbase (mm): 2564
Vehicle Size Category: MPV Test Weight (kg): 1730.0

ACCELEROMETER DATA

Accelerometer Locations: As per measurements on Page 15

Cal. Procedure/Interval: MGA procedure / 6 month

Integration Algorithm: Trapezoidal

Linearity: > 99%

Impact Velocity (km/h): 56.30

Velocity Change (km/h): 62.2

Time of Separation (msec): 98


CRUSH PROFILE

Collision Deformation Classification: Frontal

Midpoint of Damage: Centerline

Damage Region Length (mm): 1464

Impact Mode: Frontal

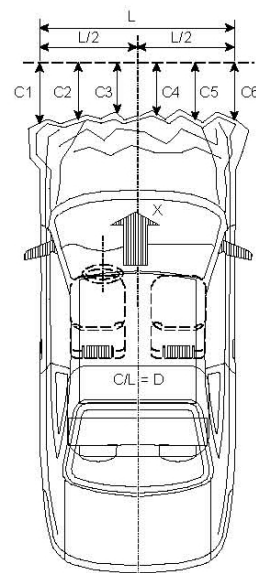

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
C1	Crush zone 1 at left side	mm	4043	3791	252
C2	Crush zone 2 at left side	mm	4157	3905	252
C3	Crush zone 3 at left side	mm	4206	3922	284
C4	Crush zone 4 at right side	mm	4206	3919	287
C5	Crush zone 5 at right side	mm	4157	3877	280
C6	Crush zone 6 at right side	mm	4043	3885	158
L	C1 TO C6	mm	1464	1430	34

**DATA SHEET NO. 14
VEHICLE INTRUSION MEASUREMENTS**

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
 Test Program: NCAP Frontal Barrier Impact Test



NHTSA No.: M20160310
 Test Date: 1/5/2016

DOOR OPENING WIDTH

Item	Description	Units	Pre-Test	Post-Test	Difference
A	Left Side Upper	mm	912	912	0
B	Left Side Lower	mm	819	819	0
D	Right Side Upper	mm	914	914	0
E	Right Side Lower	mm	824	824	0

WHEELBASE MEASUREMENTS

Item	Description	Units	Pre-Test	Post-Test	Difference
C	Left Side Wheelbase	mm	2564	2531	33
F	Right Side Wheelbase	mm	2564	2556	8

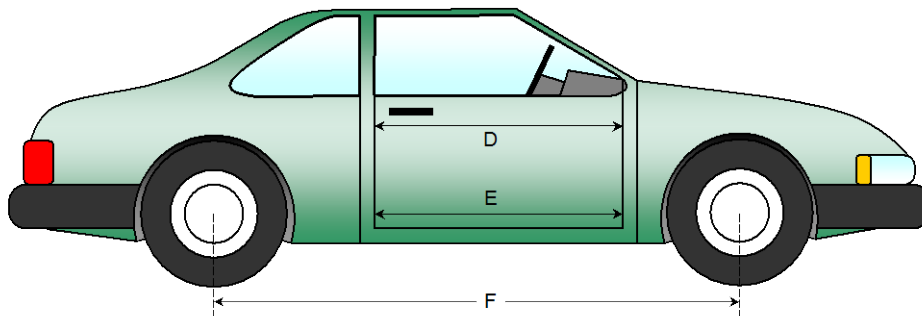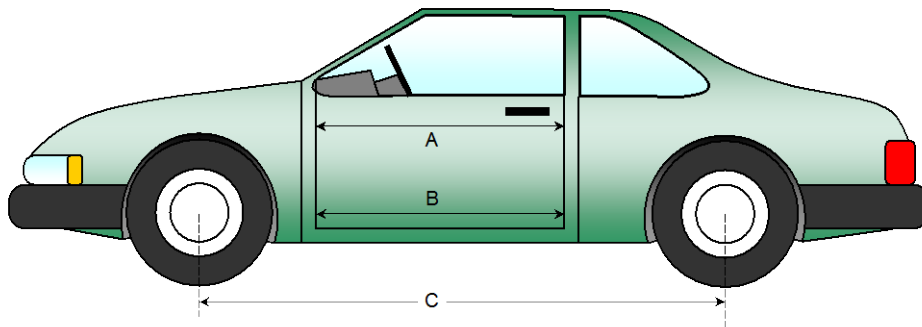

**DATA SHEET NO. 14 (CONTINUED)
VEHICLE INTRUSION MEASUREMENTS**


Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
 Test Date: 1/5/2016

DRIVER COMPARTMENT INTRUSION

Item	Description	Units	Pre-Test	Post-Test	Difference
AB	Door Opening (Inside Window Jam)	mm	687	687	0
CX	Left Knee Bolster to X	mm	402	400	2
DX	Right Knee Bolster to X	mm	405	403	2
EX	Brake Pedal to X	mm	460	689	-229
FX	Foot Rest to X	mm	589	561	28
GX	Center of Steering Column Wheel Hub to X	mm	98	149	-51

X = Front of Seat Track (stationary)

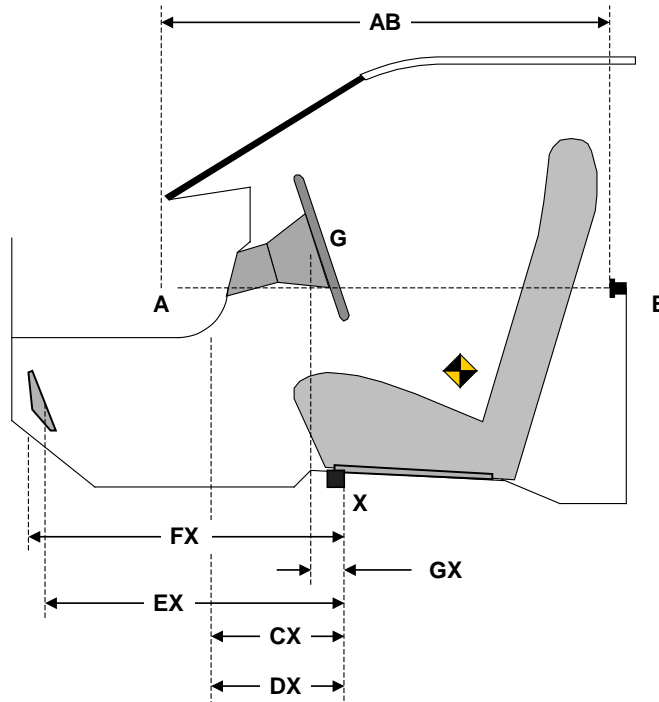

DRIVER COMPARTMENT

DATA SHEET NO. 15
SUMMARY OF FMVSS 212, FMVSS 219 (PARTIAL) DATA, AND 301 DATA

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
 Test Date: 1/5/2016

Windshield Mounting Details:


Windshield glass is secured to the vehicle frame with a rubber trim and glue.

The standard requires that the post-test retention measurement be a minimum of 75 percent of the pre-test total periphery measurement for vehicles not equipped with occupant passive restraints and 50 percent for each side of the windshield for vehicles which are equipped with occupant passive restraints.

Temperature of windshield molding during test: 21.4° C.

WINDSHIELD PERIPHERY MEASUREMENTS

Measurement	Pre-Test (mm)	Post-Test (mm)	% of Retention
Left Side	1788	1788	100
Right Side	1788	1788	100
Total	3576	3576	100

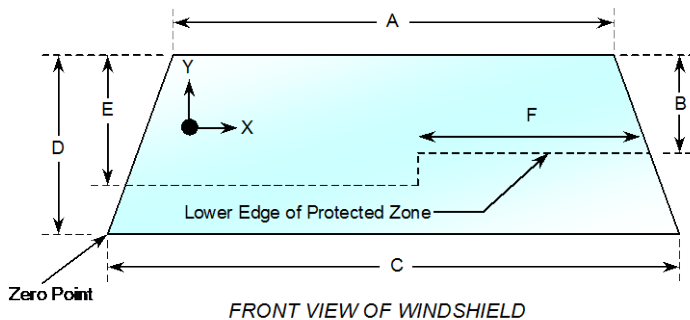

Item	Units	Value
A	mm	1219
B	mm	440
C	mm	1551
D	mm	807
E	mm	403
F	mm	545

AREA OF PROTECTED ZONE FAILURES - NONE

A. Provide coordinates of the area that the protected zone was penetrated more than 0.25 inches by a vehicle component other than one that is normally in contact with the windshield. **None**

X	Y

B. Provide coordinates of the area beneath the protected zone that the inner surface of the windshield was penetrated by a vehicle component. **None**

X	Y

DATA SHEET NO. 15 (CONTINUED)
SUMMARY OF FMVSS 212, FMVSS 219 (PARTIAL), AND 301 DATA

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
Test Date: 1/5/2016

FMVSS 301 FUEL SYSTEM INTEGRITY POST IMPACT DATA

Temperature at Time of Impact: 21.4°C Test Time: 10:59 a.m.


- A. From impact until vehicle motion ceases: 0 oz.
(Maximum allowable = 1 oz.)
- B. For the 5 minute period after motion ceases: 0 oz.
(Maximum allowable = 5 oz.)
- C. For the following 25 minutes: 0 oz.
(Maximum allowable = 1 oz./minute)
- D. Spillage: None

**DATA SHEET NO. 16
FMVSS 301 STATIC ROLLOVER RESULTS**

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
 Test Date: 1/5/2016

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.
2. The position hold time at each position is 300 seconds (minimum).
3. Details of Stoddard Solvent spillage: **None**

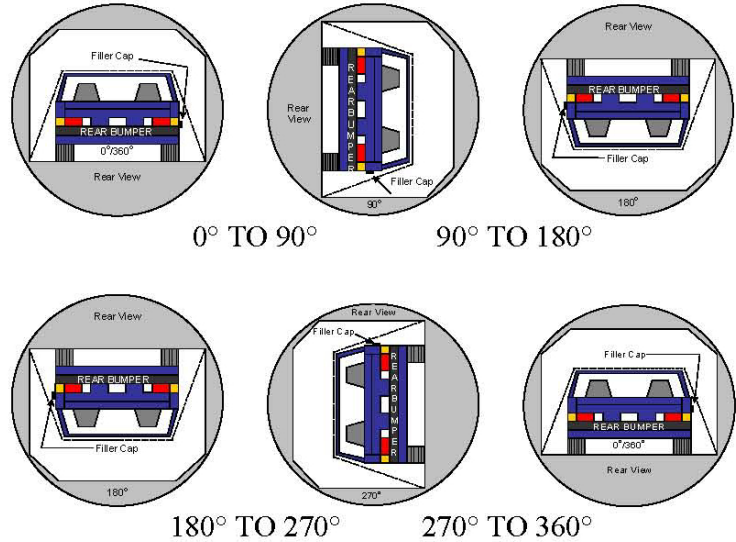

SOLVENT COLLECTION TIME TABLE IN SECONDS

Test Phase	Rotation Time	Hold Time	Total Time
0° to 90°	113	300	413
90° to 180°	110	300	410
180° to 270°	108	300	408
270° to 360°	112	300	412

FMVSS 301 SPILLAGE TABLE (units in ounces)

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eight Minute
0° to 90°	0	0	0	0
90° to 180°	0	0	0	0
180° to 270°	0	0	0	0
270° to 360°	0	0	0	0


SOLVENT SPILLAGE LOCATION TABLE

Test Phase	Spillage Location
0° to 90°	
90° to 180°	
180° to 270°	
270° to 360°	

DATA SHEET NO. 17
DUMMY/VEHICLE TEMPERATURE STABILIZATION DATA

Test Vehicle: 2016 Jeep Renegade Sport 4x4 5-Dr. SUV
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20160310
 Test Date: 1/5/2016

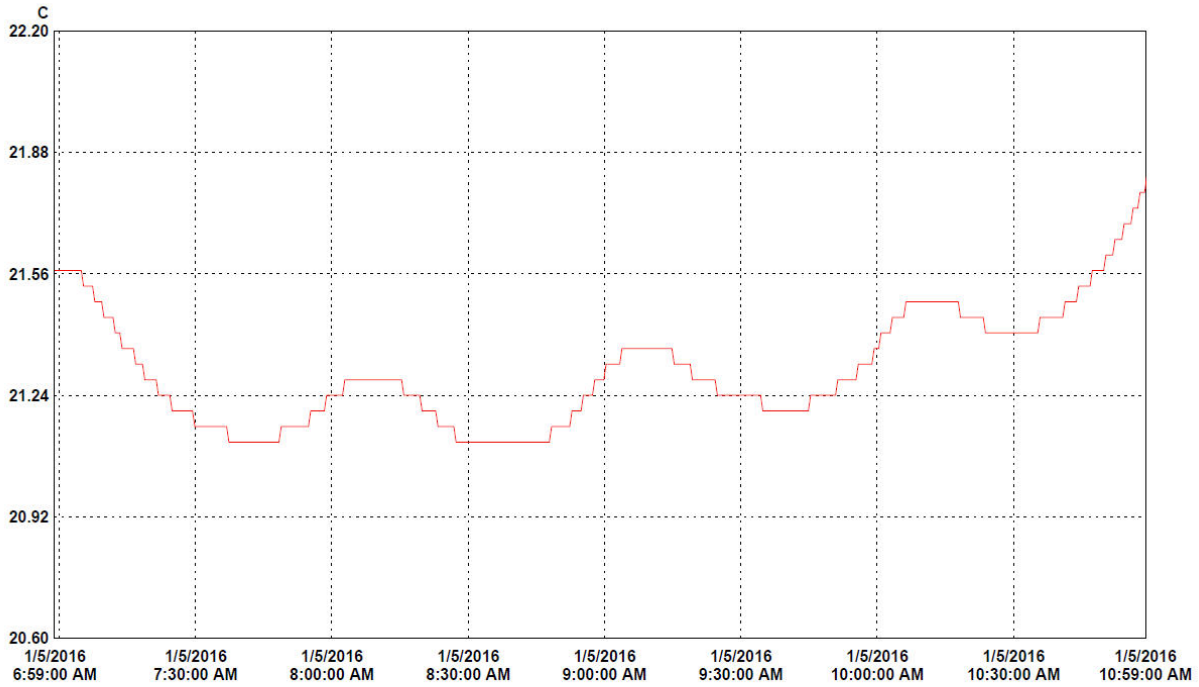

30 minutes/div 4 hours (M/d/yyyy h:mm:ss tt) Central Time Graph file (truncated): M20160310 2016 Jeep Renegade Sport 4x4 5-Dr SUV NCAP.spg

LN	Serial #	Description	CH	Value	Maximum	Average	Minimum	Units	CH description	Logger file
1	12032257	CrashPrep1	1	21.77	21.77	21.31	21.12	C	Temperature	12032257_CrashPrep1.spl

**APPENDIX A
PHOTOGRAPHS**

TABLE OF PHOTOGRAPHS

		<u>Page No.</u>
Photo No. 001	Load Cell Location	A-1
Photo No. 002	Pre-Test Load Cell Wall	A-1
Photo No. 003	Post-Test Load Cell Wall	A-2
Photo No. 004	Manufacturer's Label	A-2
Photo No. 005	Tire Placard	A-3
Photo No. 006	2016 Jeep Renegade Sport 4x4 Frontal As Delivered	A-3
Photo No. 007	Left Rear 3-4 View, As Received	A-4
Photo No. 008	Pre-Test Front View of Test Vehicle	A-4
Photo No. 009	Post-Test Front View of Test Vehicle	A-5
Photo No. 010	Pre-Test Left View of Test Vehicle	A-5
Photo No. 011	Post-Test Left View of Test Vehicle	A-6
Photo No. 012	Pre-Test Right View of Test Vehicle	A-6
Photo No. 013	Post-Test Right View of Test Vehicle	A-7
Photo No. 014	Pre-Test Right Front 3-4 View	A-7
Photo No. 015	Post-Test Right Front 3-4 View	A-8
Photo No. 016	Pre-Test Left Rear 3-4 View	A-8
Photo No. 017	Post-Test Left Rear 3-4 View	A-9
Photo No. 018	Pre-Test Windshield View	A-9
Photo No. 019	Post-Test Windshield View	A-10
Photo No. 020	Pre-Test Engine Compartment View	A-10
Photo No. 021	Post-Test Engine Compartment View	A-11
Photo No. 022	Pre-Test Fuel Filler Cap View	A-11
Photo No. 023	Post-Test Fuel Filler Cap View	A-12
Photo No. 024	Pre-Test Front Underbody View	A-12
Photo No. 025	Post-Test Front Underbody View	A-13
Photo No. 026	Pre-Test Rear Underbody View	A-13
Photo No. 027	Post-Test Rear Underbody View	A-14
Photo No. 028	Pre-Test Dummy Cable Routing	A-14
Photo No. 029	Post-Test Dummy Cable Routing	A-15
Photo No. 030	Pre-Test Driver Dummy Front View	A-15

		<u>Page No.</u>
Photo No. 031	Post-Test Driver Dummy Front View	A-16
Photo No. 032	Pre-Test Driver Dummy Window View	A-16
Photo No. 033	Post-Test Driver Dummy Window View	A-17
Photo No. 034	Pre-Test Driver Dummy and Vehicle Interior (Door Open)	A-17
Photo No. 035	Post-Test Driver Dummy and Vehicle Interior (Door Open)	A-18
Photo No. 036	Pre-Test Driver's Seat Fore-Aft Markings	A-18
Photo No. 037	Post-Test Driver's Seat Fore-Aft Markings	A-19
Photo No. 038	Pre-Test View of Belt Anchorage for Driver Dummy	A-19
Photo No. 039	Post-Test View of Belt Anchorage for Driver Dummy	A-20
Photo No. 040	Pre-Test Driver Dummy Feet	A-20
Photo No. 041	Post-Test Driver Dummy Feet	A-21
Photo No. 042	Pre-Test Driver's Side Knee Bolster (without dummy)	A-21
Photo No. 043	Post-Test Driver's Side Knee Bolster (without dummy)	A-22
Photo No. 044	Pre-Test Driver's Side Floorpan	A-22
Photo No. 045	Post-Test Driver's Side Floorpan	A-23
Photo No. 046	Post-Test Driver Dummy Face	A-23
Photo No. 047	Post-Test Driver Dummy Contact with Airbag	A-24
Photo No. 048	Post-Test Driver Dummy Contact with Headrest	A-24
Photo No. 049	Pre-Test View of the Steering Wheel	A-25
Photo No. 050	Post-Test View of the Steering Wheel	A-25
Photo No. 051	Pre-Test Passenger Dummy Front View	A-26
Photo No. 052	Post-Test Passenger Dummy Front View	A-26
Photo No. 053	Pre-Test Passenger Dummy Window View	A-27
Photo No. 054	Post-Test Passenger Dummy Window View	A-27
Photo No. 055	Pre-Test Passenger Dummy and Vehicle Interior (Door Open)	A-28
Photo No. 056	Post-Test Passenger Dummy and Vehicle Interior (Door Open)	A-28
Photo No. 057	Pre-Test Passenger's Seat Fore-Aft Markings	A-29
Photo No. 058	Post-Test Passenger's Seat Fore-Aft Markings	A-29
Photo No. 059	Pre-Test View of Belt Anchorage for Passenger Dummy	A-30
Photo No. 060	Post-Test View of Belt Anchorage for Passenger Dummy	A-30

		<u>Page No.</u>
Photo No. 061	Pre-Test Passenger Dummy Feet	A-31
Photo No. 062	Post-Test Passenger Dummy Feet	A-31
Photo No. 063	Pre-Test Passenger's Side Knee Bolster (without dummy)	A-32
Photo No. 064	Post-Test Passenger's Side Knee Bolster (without dummy)	A-32
Photo No. 065	Pre-Test Passenger's Side Floorpan	A-33
Photo No. 066	Post-Test Passenger's Side Floorpan	A-33
Photo No. 067	Post-Test Passenger Dummy Face	A-34
Photo No. 068	Post-Test Passenger Dummy Contact with Airbag	A-34
Photo No. 069	Post-Test Passenger Dummy Contact with Headrest	A-35
Photo No. 070	Ballast Installed in Vehicle	A-35
Photo No. 071	Post-Test Stoddard Solvent Spillage Location View	A-36
Photo No. 072	Post-Test Speed Trap Read-Out	A-36
Photo No. 073	Vehicle at 0 Degree on Static Rollover Device	A-37
Photo No. 074	Vehicle at 90 Degrees on Static Rollover Device	A-37
Photo No. 075	Vehicle at 180 Degrees on Static Rollover Device	A-38
Photo No. 076	Vehicle at 270 Degrees on Static Rollover Device	A-38
Photo No. 077	Vehicle at 360 Degrees on Static Rollover Device	A-39
Photo No. 078	2016 Jeep Renegade Sport 4x4 Frontal Impact Event	A-39
Photo No. 079	Monroney Label Photograph	A-40



Photo No. 001 - Load Cell Location

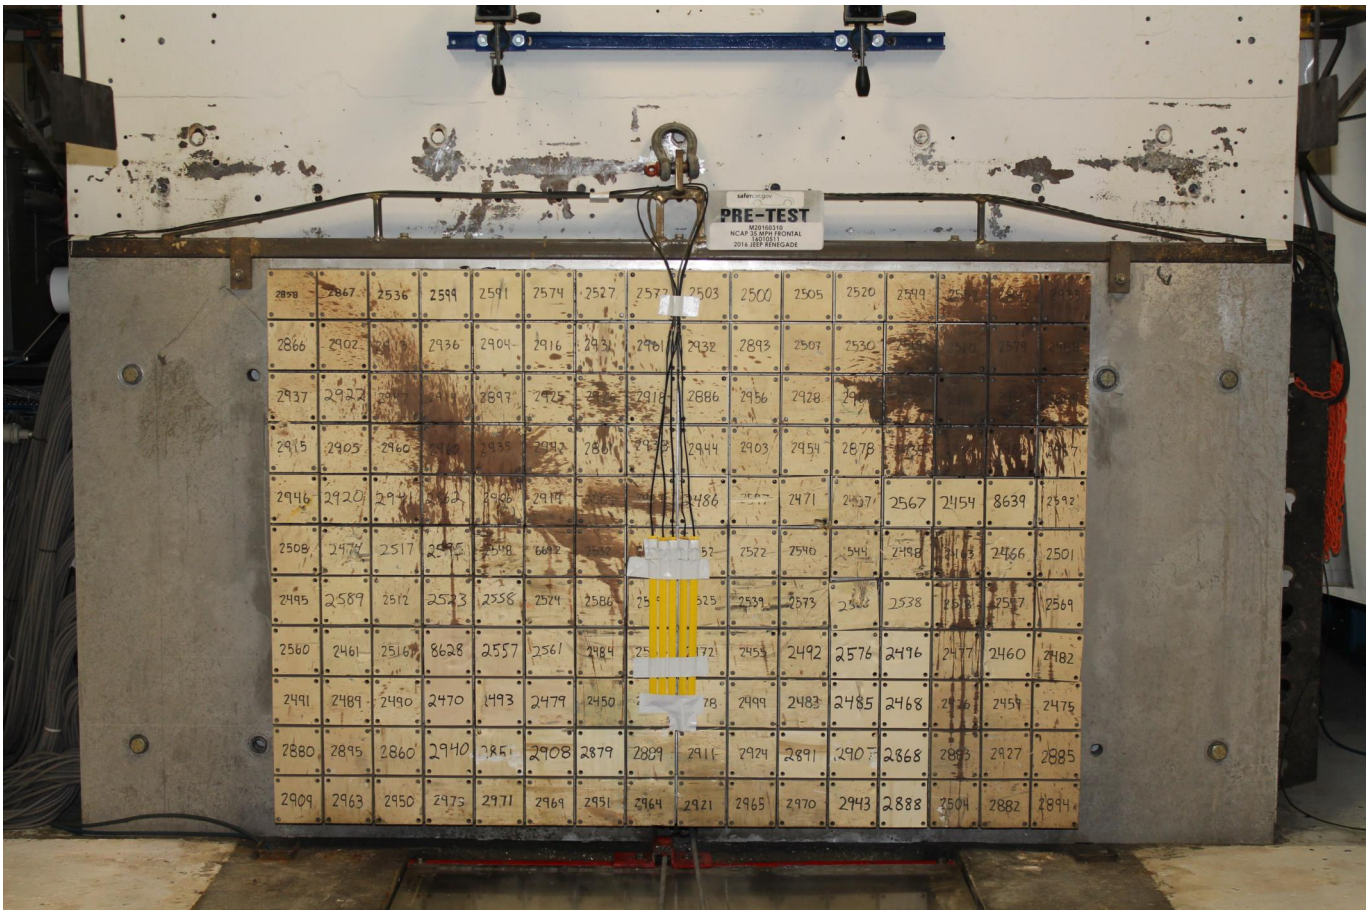


Photo No. 002 - Pre-Test Load Cell Wall

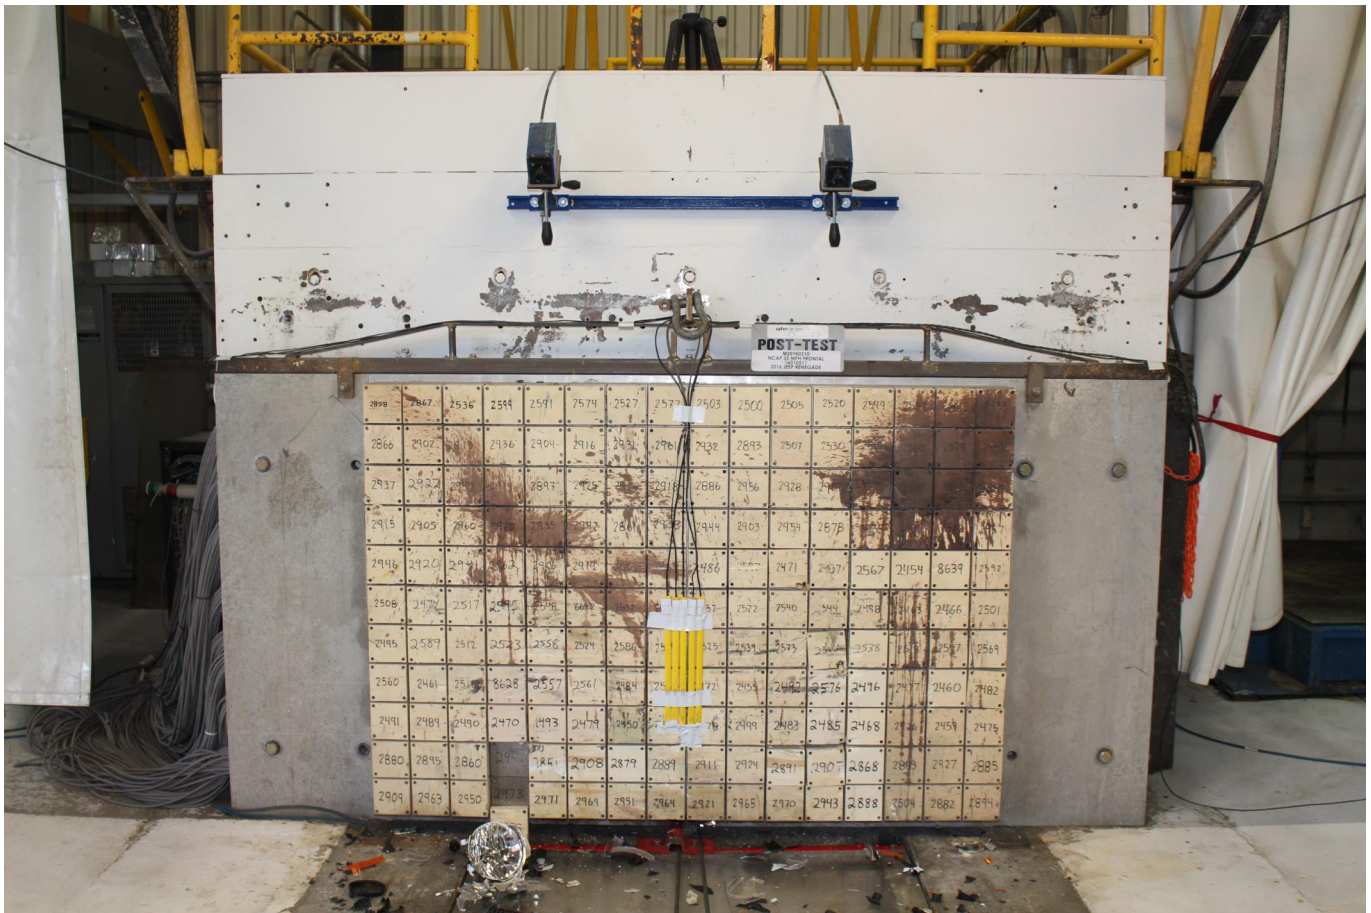


Photo No. 003 - Post-Test Load Cell Wall



Photo No. 004 - Manufacturer's Label



Photo No. 005 - Tire Placard



Photo No. 006 - 2016 Jeep Renegade Sport 4x4 Frontal As Delivered



Photo No. 007 - Left Rear 3-4 View, As Received



Photo No. 008 - Pre-Test Front View of Test Vehicle



Photo No. 009 - Post-Test Front View of Test Vehicle



Photo No. 010 - Pre-Test Left View of Test Vehicle



Photo No. 011 - Post-Test Left View of Test Vehicle



Photo No. 012 - Pre-Test Right View of Test Vehicle



Photo No. 013 - Post-Test Right View of Test Vehicle



Photo No. 014 - Pre-Test Right Front 3-4 View



Photo No. 015 - Post-Test Right Front 3-4 View



Photo No. 016 - Pre-Test Left Rear 3-4 View



Photo No. 017 - Post-Test Left Rear 3-4 View



Photo No. 018 - Pre-Test Windshield View



Photo No. 019 - Post-Test Windshield View



Photo No. 020 - Pre-Test Engine Compartment View



Photo No. 021 - Post-Test Engine Compartment View



Photo No. 022 - Pre-Test Fuel Filler Cap View



Photo No. 023 - Post-Test Fuel Filler Cap View

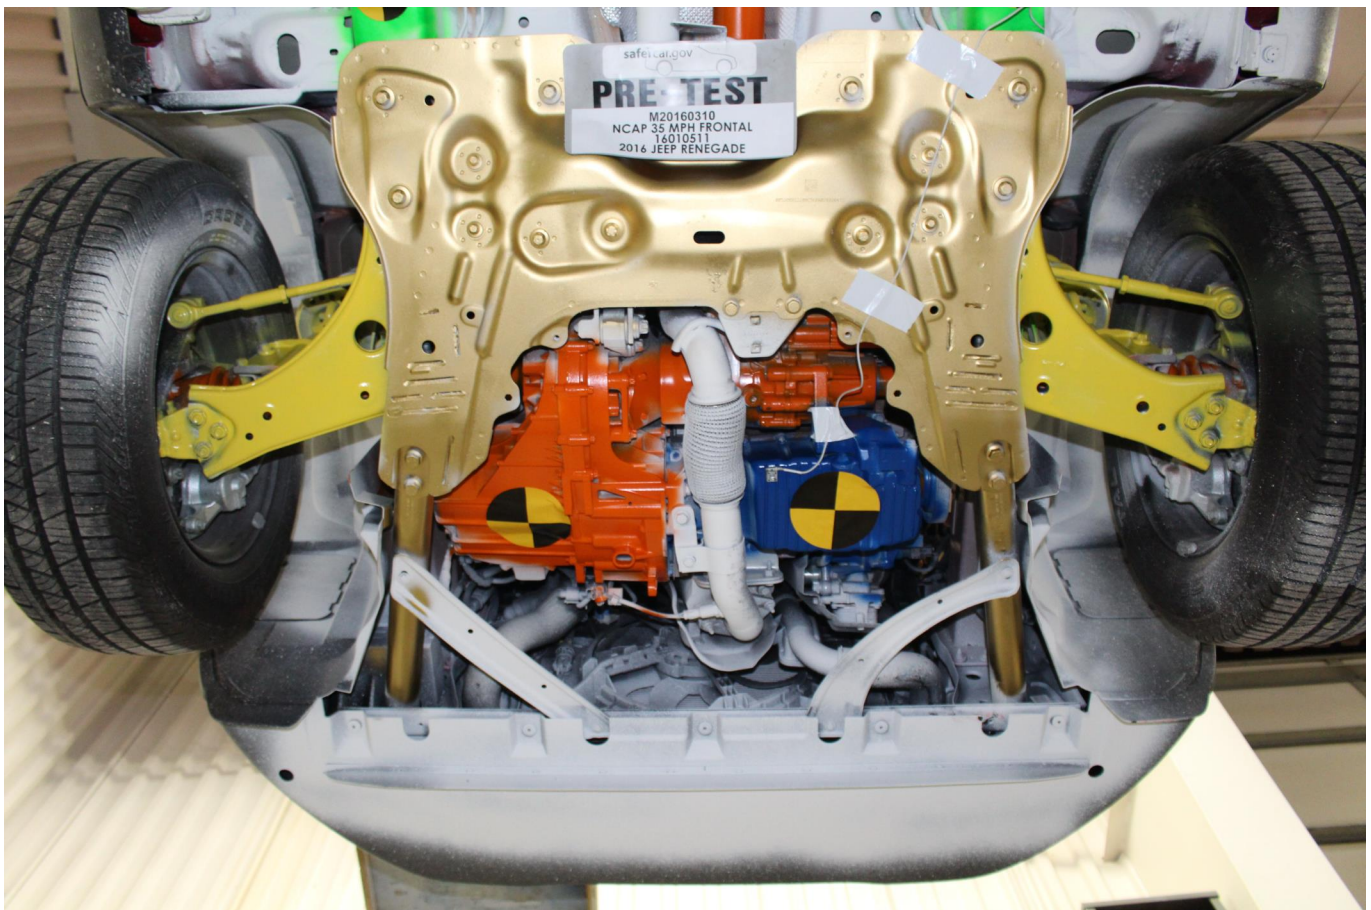


Photo No. 024 - Pre-Test Front Underbody View

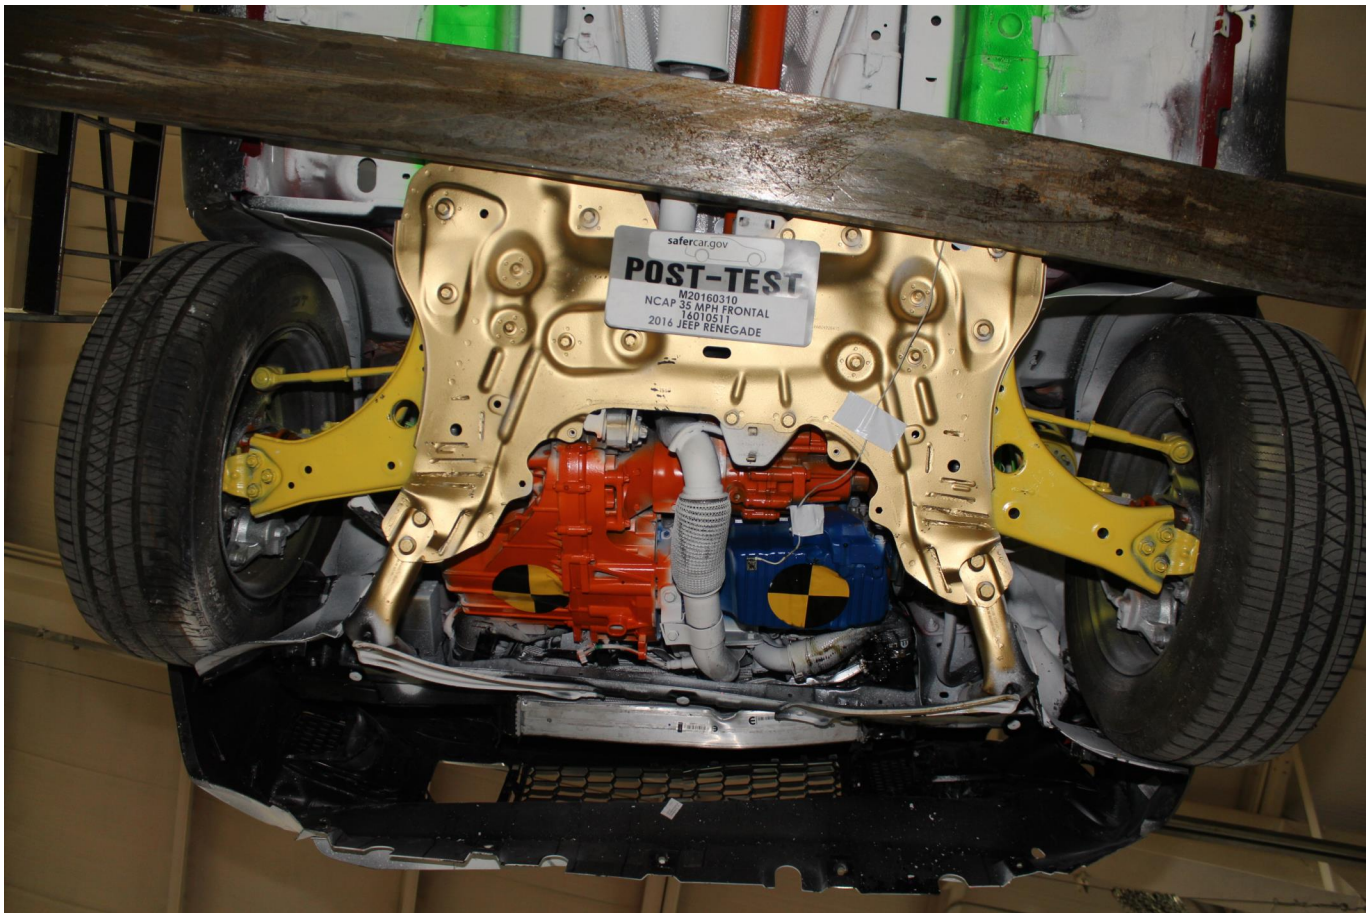


Photo No. 025 - Post-Test Front Underbody View



Photo No. 026 - Pre-Test Rear Underbody View

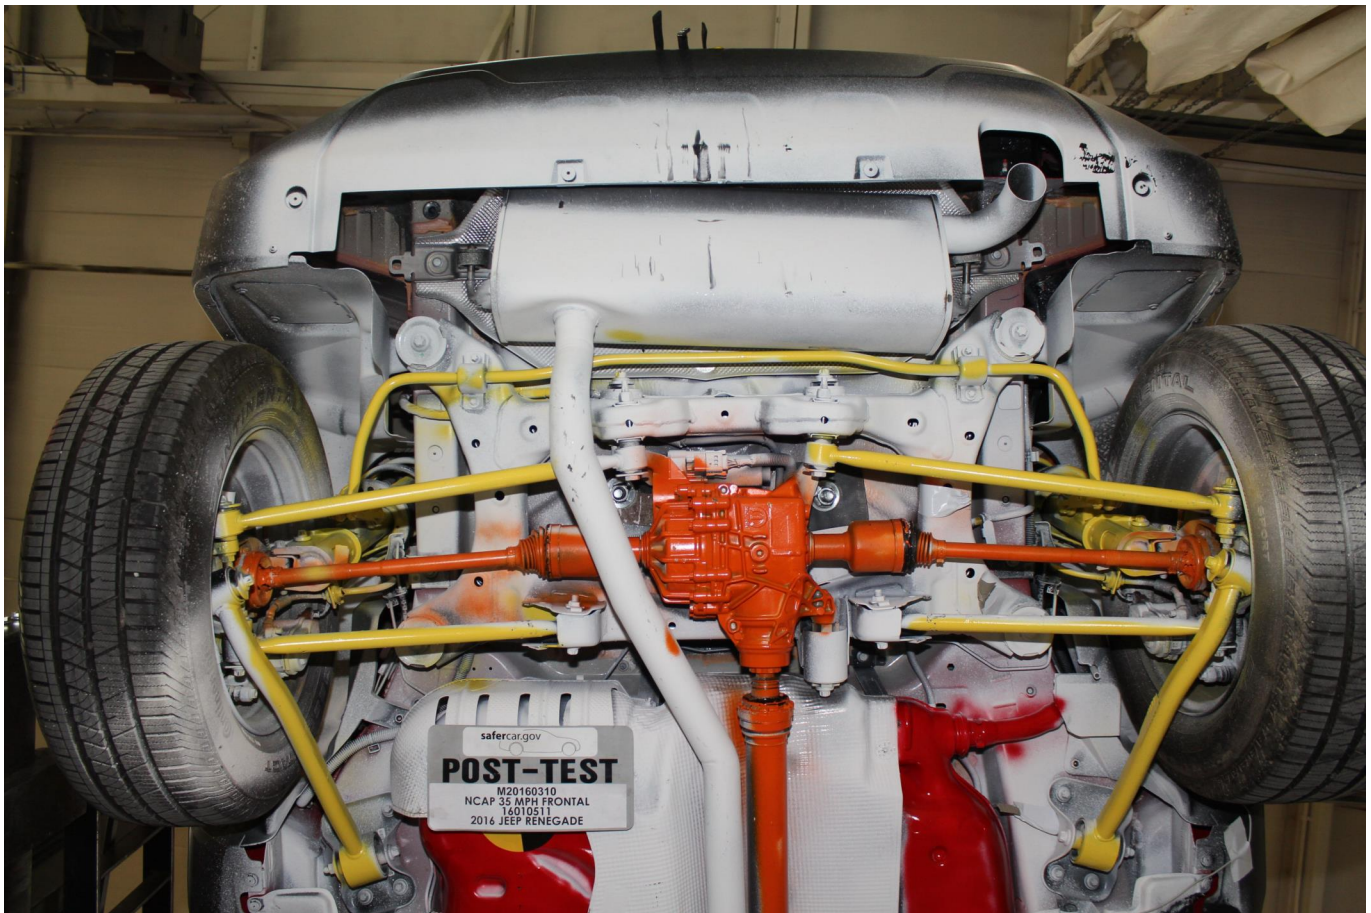


Photo No. 027 - Post-Test Rear Underbody View



Photo No. 028 - Pre-Test Dummy Cable Routing



Photo No. 029 - Post-Test Dummy Cable Routing



Photo No. 030 - Pre-Test Driver Dummy Front View



Photo No. 031 - Post-Test Driver Dummy Front View



Photo No. 032 - Pre-Test Driver Dummy Window View



Photo No. 033 - Post-Test Driver Dummy Window View



Photo No. 034 - Pre-Test Driver Dummy and Vehicle Interior (Door Open)



Photo No. 035 - Post-Test Driver Dummy and Vehicle Interior (Door Open)



Photo No. 036 - Pre-Test Driver's Seat Fore-Aft Markings

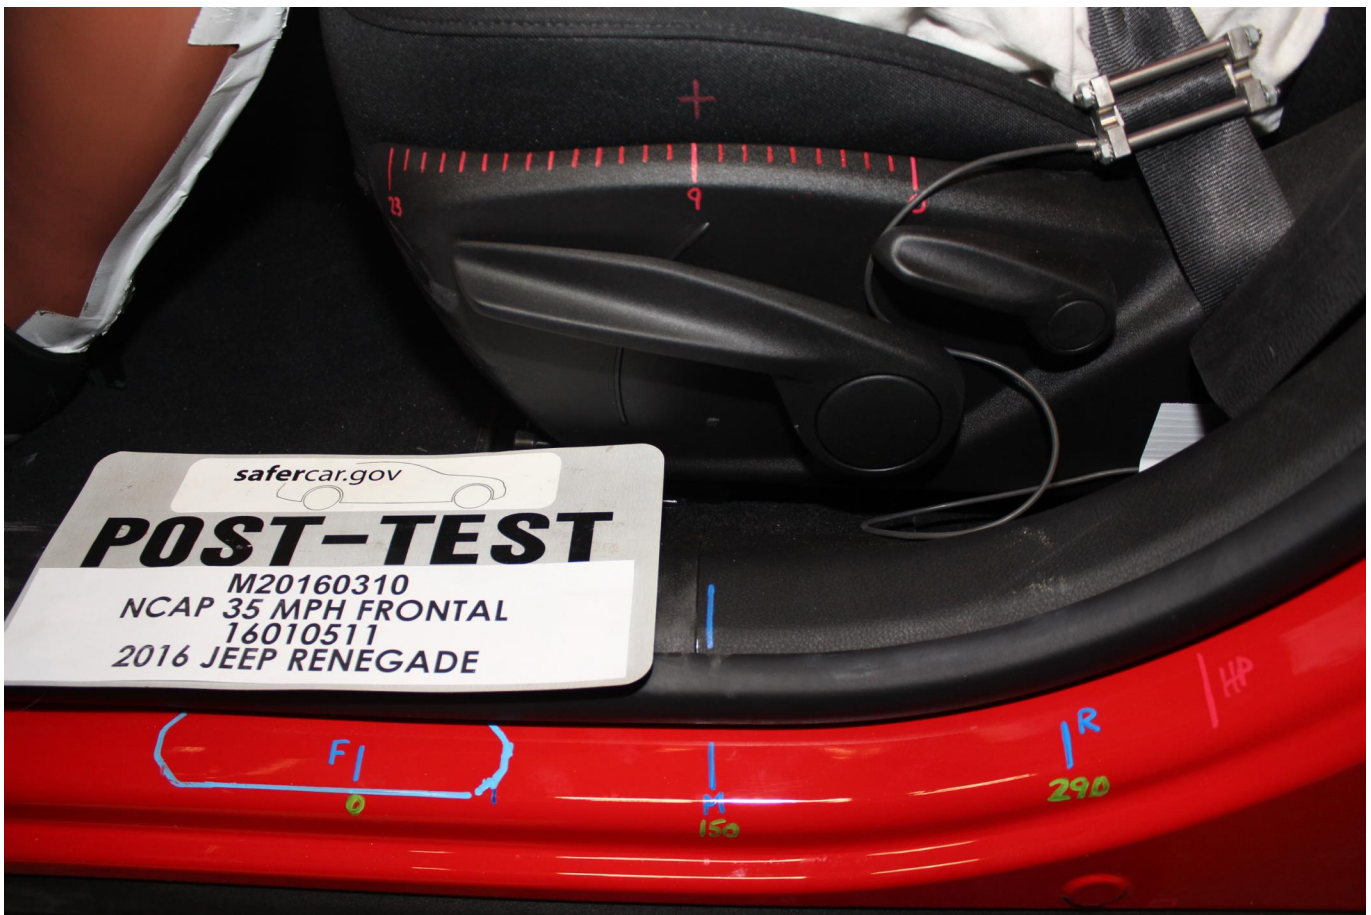


Photo No. 037 - Post-Test Driver's Seat Fore-Aft Markings



Photo No. 038 - Pre-Test View of Belt Anchorage for Driver Dummy



Photo No. 039 - Post-Test View of Belt Anchorage for Driver Dummy



Photo No. 040 - Pre-Test Driver Dummy Feet



Photo No. 041 - Post-Test Driver Dummy Feet



Photo No. 042 - Pre-Test Driver's Side Knee Bolster (without dummy)



Photo No. 043 - Post-Test Driver's Side Knee Bolster (without dummy)



Photo No. 044 - Pre-Test Driver's Side Floorpan



Photo No. 045 - Post-Test Driver's Side Floorpan



Photo No. 046 - Post-Test Driver Dummy Face



Photo No. 047 - Post-Test Driver Dummy Contact with Airbag



Photo No. 048 - Post-Test Driver Dummy Contact with Headrest



Photo No. 049 - Pre-Test View of the Steering Wheel

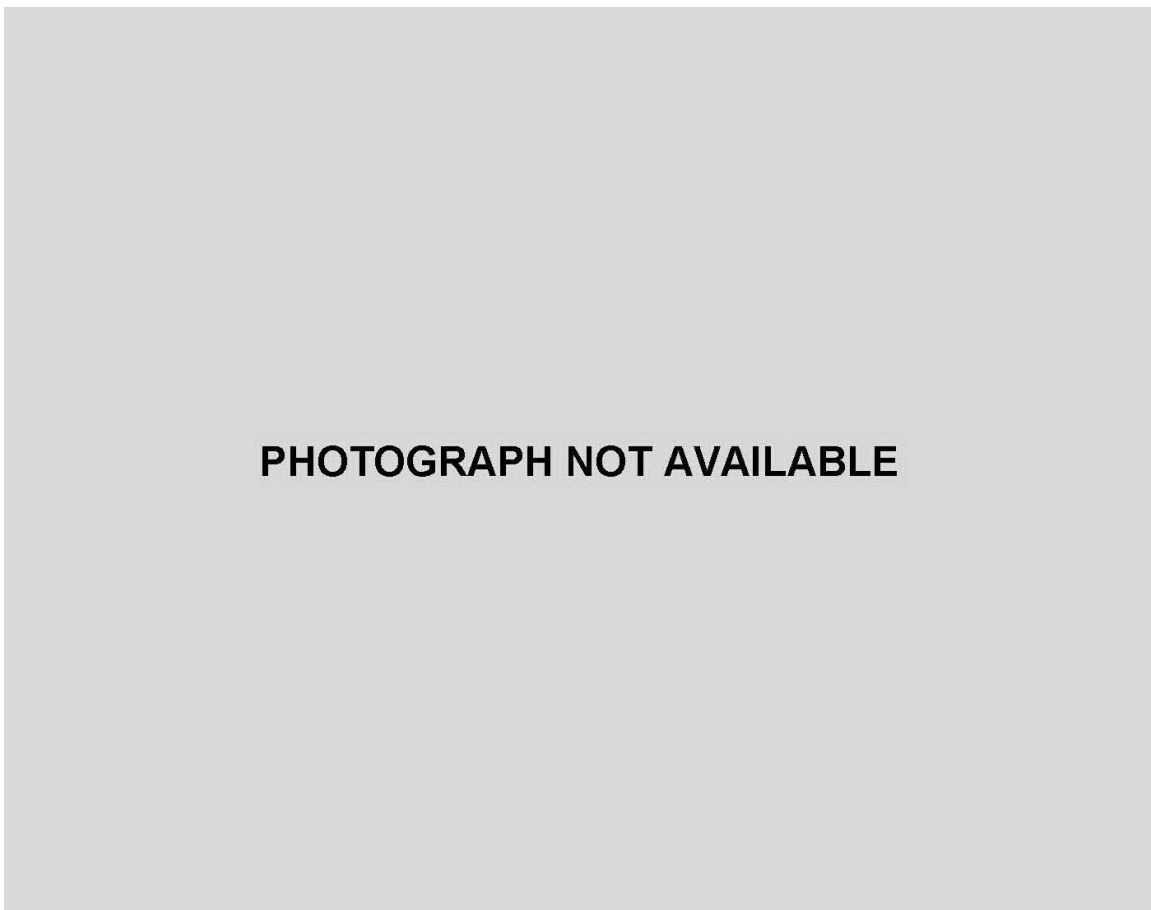


Photo No. 050 - Post-Test View of the Steering Wheel



Photo No. 051 - Pre-Test Passenger Dummy Front View



Photo No. 052 - Post-Test Passenger Dummy Front View



Photo No. 053 - Pre-Test Passenger Dummy Window View



Photo No. 054 - Post-Test Passenger Dummy Window View



Photo No. 055 - Pre-Test Passenger Dummy and Vehicle Interior (Door Open)



Photo No. 056 - Post-Test Passenger Dummy and Vehicle Interior (Door Open)



Photo No. 057 - Pre-Test Passenger's Seat Fore-Aft Markings



Photo No. 058 - Post-Test Passenger's Seat Fore-Aft Markings



Photo No. 059 - Pre-Test View of Belt Anchorage for Passenger Dummy

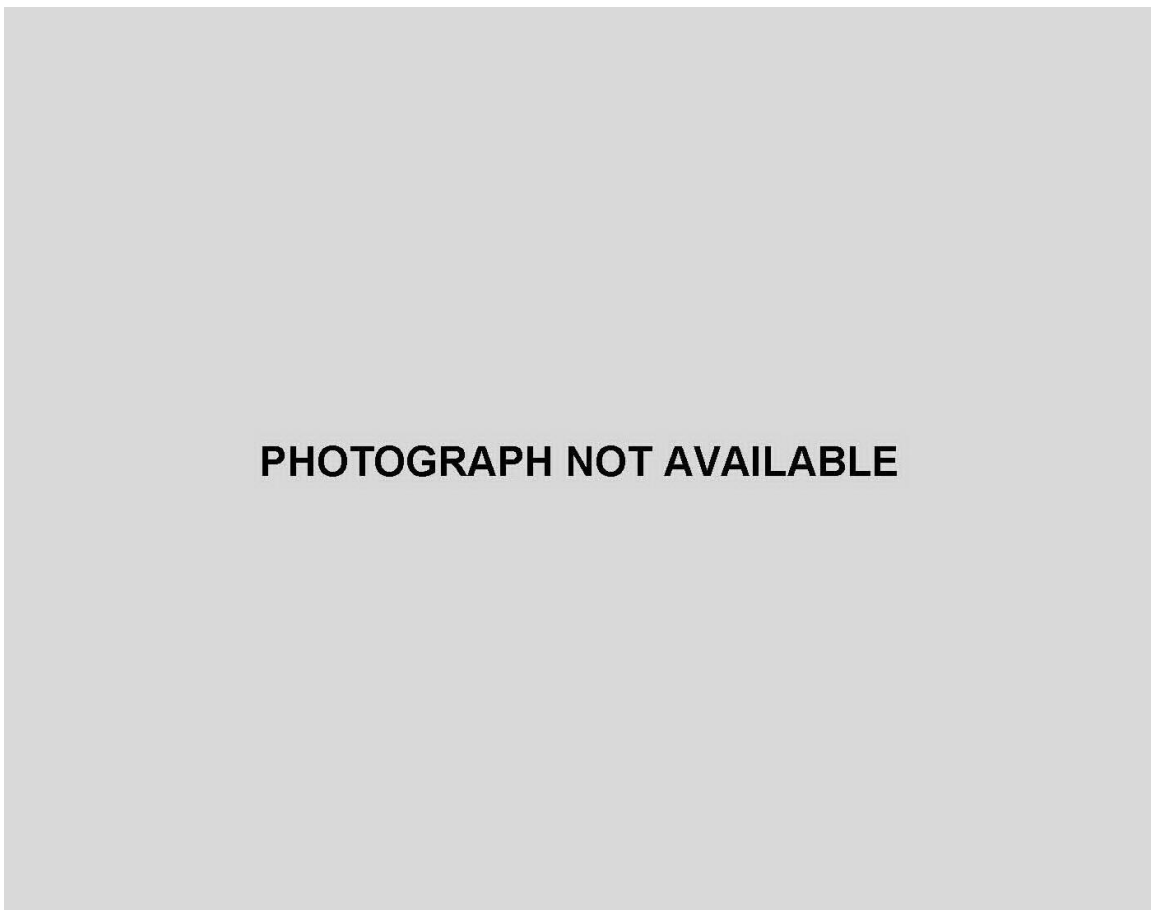


Photo No. 060 - Post-Test View of Belt Anchorage for Passenger Dummy



Photo No. 061 - Pre-Test Passenger Dummy Feet



Photo No. 062 - Post-Test Passenger Dummy Feet



Photo No. 063 - Pre-Test Passenger Side Knee Bolster (without dummy)



Photo No. 064 - Post-Test Passenger Side Knee Bolster (without dummy)



Photo No. 065 - Pre-Test Passenger Side Floorpan



Photo No. 066 - Post-Test Passenger Side Floorpan



Photo No. 067 - Post-Test Passenger Dummy Face



Photo No. 068 - Post-Test Passenger Dummy Contact with Airbag



Photo No. 069 - Post-Test Passenger Dummy Contact with Headrest



Photo No. 070 - Ballast Installed in Vehicle

PHOTOGRAPH NOT APPLICABLE

Photo No. 071 - Post-Test Stoddard Solvent Spillage Location View



Photo No. 072 - Post-Test Speed Trap Read-Out



Photo No. 073 - Vehicle at 0 Degree on Static Rollover Device



Photo No. 074 - Vehicle at 90 Degrees on Static Rollover Device



Photo No. 075 - Vehicle at 180 Degrees on Static Rollover Device

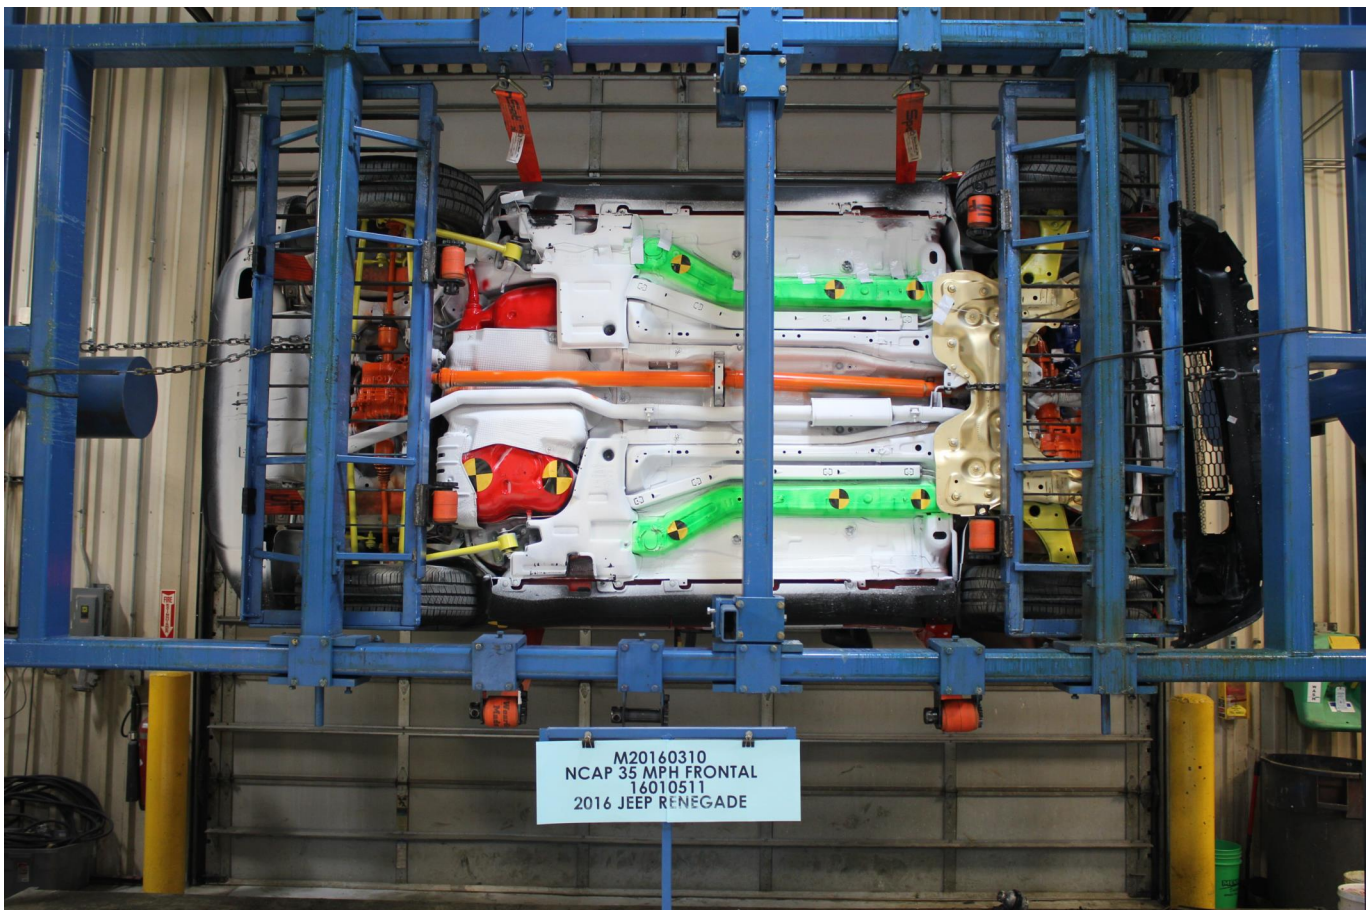


Photo No. 076 - Vehicle at 270 Degrees on Static Rollover Device



Photo No. 077 - Vehicle at 360 Degrees on Static Rollover Device



Photo No. 078 - 2016 Jeep Renegade Sport 4x4 Frontal Impact Event

Jeep 2016 MODEL YEAR **RENEGADE SPORT 4X4**

For more information visit: www.jeep.com
or call 1-877-IAM-JEEP

FCA US LLC

9-15

THIS VEHICLE IS MANUFACTURED TO MEET SPECIFIC UNITED STATES REQUIREMENTS. THIS VEHICLE IS NOT MANUFACTURED FOR SALE OR REGISTRATION OUTSIDE OF THE UNITED STATES.

MANUFACTURER'S SUGGESTED RETAIL PRICE OF THIS MODEL INCLUDING DEALER PREPARATION

Base Price: \$19,995

JEEP RENEGADE SPORT 4X4
Exterior Color: Colorado Red Exterior Paint
Interior Color: Black Interior Color
Interior: Cloth Low-Back Bucket Seats
Engine: 1.4-Liter 4 MultiAir Turbo Engine
Transmission: 5-Speed 6055 Manual Transmission

STANDARD EQUIPMENT (UNLESS REPLACED BY OPTIONAL EQUIPMENT)

- FUNCTIONAL SAFETY FEATURES**
Advanced Multistage Front Airbags
Supplemental Side-Curtain Front and Rear Airbags
Supplemental Front Seat-Mounted Side Airbags
Driver Inflatable Knee-Bolster Airbag
LATCH Ready Child Seat Anchor System
Anti-Lock 4-Wheel Disc Brakes
Electric Park Brake
Electronic Stability Control
Remote Keyless Entry
Electronic Roll Mitigation
Select-Terrain™ System
All-Speed Traction Control
Capless Fuel Fill
Daytime Running Lamp System
Hill Start Assist
Cluster 3.5-inch TFT Monochrome Display
Tire Pressure Monitoring Display
Outside Temperature Display
12-Volt Auxiliary Power Outlet
Auxiliary 12-Volt Rear Power Outlet
Center Rear 3-Point Seat Belt
- INTERIOR FEATURES**
Radio 3.0
4 Speakers
Steering Wheel Mounted Audio Controls
Tilt / Telescope Steering Column
Silver Shift Knob
Media Hub (USB, Aux)
Heater with Instrument Panel Ventilation
Manual 5-Way Driver Seat and 4-Way Pass Seat
Front-Passenger Fold Forward Seat with Soft Back
Rear 60 / 40 Folding Seat
Height Adjustable Rear Cargo Floor

- Power Front Windows w/ 1-Touch Up and Down Feature
EXTERIOR FEATURES
16-inch x 6.5-inch Styled Steel Wheels
215/55R16 LBL All Season Tires
Tire Service Kit
Variable Intermittent Windshield Wipers
Rear Window Wiper / Washer
Halogen Headlamps

- OPTIONAL EQUIPMENT (May Replace Standard Equipment)**
Customer Preferred Package 21A
SiriusXM Satellite Radio Sound Group \$195
Remote USB Port - Charge-Only
SiriusXM® Sat. Radio W/1-Yr. Radio Subscription
For More Information, Call 800-643-2112
Uconnect® 5.0 Radio with Back-up Camera \$695
Integrated Voice Command with Bluetooth®
GPS Antenna Input
Uconnect® 5.0
8 Speakers
5.0-inch Touchscreen Display
ParkView™ Rear Back-Up Camera
Power and Air Group \$1,450
Power Heated Mirror
Air Conditioning
Speed Control

DESTINATION CHARGE \$995

TOTAL PRICE: * \$23,375

WARRANTY COVERAGE
5-year or 60,000-mile Powertrain Limited Warranty,
3-year or 36,000-mile Basic Limited Warranty,
Ask Dealer for a copy of the limited warranties or
see your owner's manual for details.

**5 YEAR / 60,000 MILE
POWERTRAIN WARRANTY**

Assembly Plant/Port of Entry: BALTIMORE, MARYLAND, U.S.A.
VIN: ZAC-CJBAWXG6-C45222

SHIP TO: MODEL: 4X
DEALERSHIP: CHRYSLER JEEP H INC
100 E ROUTE 34
PLANO, IL 60545-9771

SHIPPED BY: MODEL: 4X
DEALERSHIP: CHRYSLER JEEP H INC
100 E ROUTE 34
PLANO, IL 60545-9771

THIS LABEL IS ADDED TO THIS VEHICLE TO COMPLY WITH FEDERAL LAW. THE LABEL CANNOT BE REMOVED OR A THIRD PARTY TO DELIVER TO THE US MARKET. PLEASE
STATE AND/OR LOCAL TAXES IF ANY, LICENSE AND TITLE FEES AND DEALER SUPPLIES AND
OPTIONAL EQUIPMENT AND ACCESSORIES ARE NOT INCLUDED IN THIS PRICE. IF YOU BUY
A BUNDLE OR PACKAGE OF OPTIONS, THEY WILL BE LISTED SEPARATELY.

EPA DOT Fuel Economy and Environment

Gasoline Vehicle

Fuel Economy
27 MPG
combined city/hwy
3.7 gallons per 100 miles

Small SUV 4WD range from 17 to 33 MPG.
The best vehicle rates 119 MPG.

You spend \$250
more in fuel costs
over 5 years
compared to the
average new vehicle.

Annual fuel cost \$1,850

Fuel Economy & Greenhouse Gas Rating (tailpipe only)



Smog Rating (tailpipe only)



Actual mileage may vary for many reasons. Fuel economy ratings are estimates and do not represent actual mileage. The average new vehicle gets 26 MPG and costs \$1,850 in fuel over 5 years. Cost estimates are based on 15,000 miles per year at \$3.30 per gallon. MPG is miles per gallon. Gallon equivalent. Vehicle emissions are a significant source of climate change and smog.

fuel economy.gov
Calculate personalized emissions and compare vehicles



GOVERNMENT 5-STAR SAFETY RATINGS

This vehicle has not been rated by the government for frontal crash, side crash or rollover risk.

Source: National Highway Traffic Safety Administration (NHTSA)
www.safercar.gov or 1-888-327-4236

PARTS CONTENT INFORMATION

FOR VEHICLES IN THIS CARLINE:
U.S./CANADIAN PARTS CONTENT: 22%
MAJOR SOURCES OF FOREIGN PARTS CONTENT:
ITALY: 62%
NOTE: PARTS CONTENT DOES NOT INCLUDE FINAL ASSEMBLY, DISTRIBUTION, OR OTHER NON-PARTS COSTS.
FOR THIS VEHICLE:
FINAL ASSEMBLY POINT:
MELFI, ITALY
COUNTRY OF ORIGIN:
ENGINE: ITALY
TRANSMISSION: ITALY

Photo No. 079 - Monroney Label Photograph

APPENDIX B
DUMMY RESPONSE DATA TRACES

TABLE OF DATA PLOTS

Page No.

List of Data Plots Provided in the Test Report

Figure No. 1.	Driver Head X Acceleration vs. Time	B-1
Figure No. 2.	Driver Head Y Acceleration vs. Time	B-1
Figure No. 3.	Driver Head Z Acceleration vs. Time	B-1
Figure No. 4.	Driver Head Resultant Acceleration vs. Time	B-1
Figure No. 5.	Driver Chest Displacement vs. Time	B-2
Figure No. 6.	Driver Chest X Acceleration vs. Time	B-3
Figure No. 7.	Driver Chest Y Acceleration vs. Time	B-3
Figure No. 8.	Driver Chest Z Acceleration vs. Time	B-3
Figure No. 9.	Driver Chest Resultant Acceleration vs. Time	B-3
Figure No. 10.	Driver Neck Force X vs. Time	B-4
Figure No. 11.	Driver Neck Force Z vs. Time	B-4
Figure No. 12.	Driver Neck Moment Y vs. Time	B-4
Figure No. 13.	Driver Nij (NTF) vs. Time	B-5
Figure No. 14.	Driver Nij (NTE) vs. Time	B-5
Figure No. 15.	Driver Nij (NCF) vs. Time	B-5
Figure No. 16.	Driver Nij (NCE) vs. Time	B-5
Figure No. 17.	Driver Left Femur Force vs. Time	B-6
Figure No. 18.	Driver Right Femur Force vs. Time	B-6
Figure No. 19.	Passenger Head X Acceleration vs. Time	B-7
Figure No. 20.	Passenger Head Y Acceleration vs. Time	B-7
Figure No. 21.	Passenger Head Z Acceleration vs. Time	B-7
Figure No. 22.	Passenger Head Resultant Acceleration vs. Time	B-7
Figure No. 23.	Passenger Chest Displacement vs. Time	B-8
Figure No. 24.	Passenger Chest X Acceleration vs. Time	B-9
Figure No. 25.	Passenger Chest Y Acceleration vs. Time	B-9
Figure No. 26.	Passenger Chest Z Acceleration vs. Time	B-9
Figure No. 27.	Passenger Chest Resultant Z Acceleration vs. Time	B-9




	<u>Page No.</u>
Figure No. 28. Passenger Neck Force X vs. Time	B-10
Figure No. 29. Passenger Neck Force Z vs. Time	B-10
Figure No. 30. Passenger Neck Moment Y vs. Time	B-10
Figure No. 31. Passenger Nij (NTF) vs. Time	B-11
Figure No. 32. Passenger Nij (NTE) vs. Time	B-11
Figure No. 33. Passenger Nij (NCF) vs. Time	B-11
Figure No. 34. Passenger Nij (NCE) vs. Time	B-11
Figure No. 35. Passenger Left Femur Force vs. Time	B-12
Figure No. 36. Passenger Right Femur Force vs. Time	B-12


The following additional dummy and vehicle response data can be found in the R&D section of the NHTSA website at www.nhtsa.dot.gov



Driver Head X Redundant
Driver Head Y Redundant
Driver Head Z Redundant
Driver Head Angular Velocity X
Driver Head Angular Velocity Y
Driver Head Angular Velocity Z
Driver Upper Neck Force Y
Driver Upper Neck Moment X
Driver Upper Neck Moment Z
Driver Chest X Redundant
Driver Chest Y Redundant
Driver Chest Z Redundant
Driver Pelvis X
Driver Pelvis Y
Driver Pelvis Z
Driver Left Femur Redundant
Driver Right Femur Redundant
Driver Left Upper Tibia Moment X
Driver Left Upper Tibia Moment Y



Driver Left Upper Tibia Force Z
Driver Left Lower Tibia Moment X
Driver Left Lower Tibia Moment Y
Driver Left Lower Tibia Force Z
Driver Right Upper Tibia Moment X
Driver Right Upper Tibia Moment Y
Driver Right Upper Tibia Force Z
Driver Right Lower Tibia Moment X
Driver Right Lower Tibia Moment Y
Driver Right Lower Tibia Force Z
Driver Left Foot Fore Z
Driver Left Foot Aft X
Driver Left Foot Aft Z
Driver Right Foot Fore Z
Driver Right Foot Aft X
Driver Right Foot Aft Z
Driver Lap Belt Force
Driver Shoulder Belt Force
Passenger Head X Redundant
Passenger Head Y Redundant
Passenger Head Z Redundant
Passenger Head Angular Velocity X
Passenger Head Angular Velocity Y
Passenger Head Angular Velocity Z
Passenger Upper Neck Force Y
Passenger Upper Neck Moment X
Passenger Upper Neck Moment Z
Passenger Chest X Redundant
Passenger Chest Y Redundant
Passenger Chest Z Redundant
Passenger Pelvis X
Passenger Pelvis Y





Passenger Pelvis Z
Passenger Left Femur Redundant
Passenger Right Femur Redundant
Passenger Left Upper Tibia Moment X
Passenger Left Upper Tibia Moment Y
Passenger Left Upper Tibia Force Z
Passenger Left Lower Tibia Moment X
Passenger Left Lower Tibia Moment Y
Passenger Left Lower Tibia Force Z
Passenger Right Upper Tibia Moment X
Passenger Right Upper Tibia Moment Y
Passenger Right Upper Tibia Force Z
Passenger Right Lower Tibia Moment X
Passenger Right Lower Tibia Moment Y
Passenger Right Lower Tibia Force Z
Passenger Left Foot Fore Z
Passenger Left Foot Aft X
Passenger Left Foot Aft Z
Passenger Right Foot Fore Z
Passenger Right Foot Aft X
Passenger Right Foot Aft Z
Passenger Lap Belt Force
Passenger Shoulder Belt Force
Left Rear Seat Crossmember X
Right Rear Seat Crossmember X
Vehicle Engine Top X
Vehicle Engine Bottom X
Left Rear Seat Crossmember Z
Right Rear Seat Crossmember Z
Left Rear Seat Crossmember Xr
Right Rear Seat Crossmember Xr
Advanced Research Load Cell Barrier – 528 channels

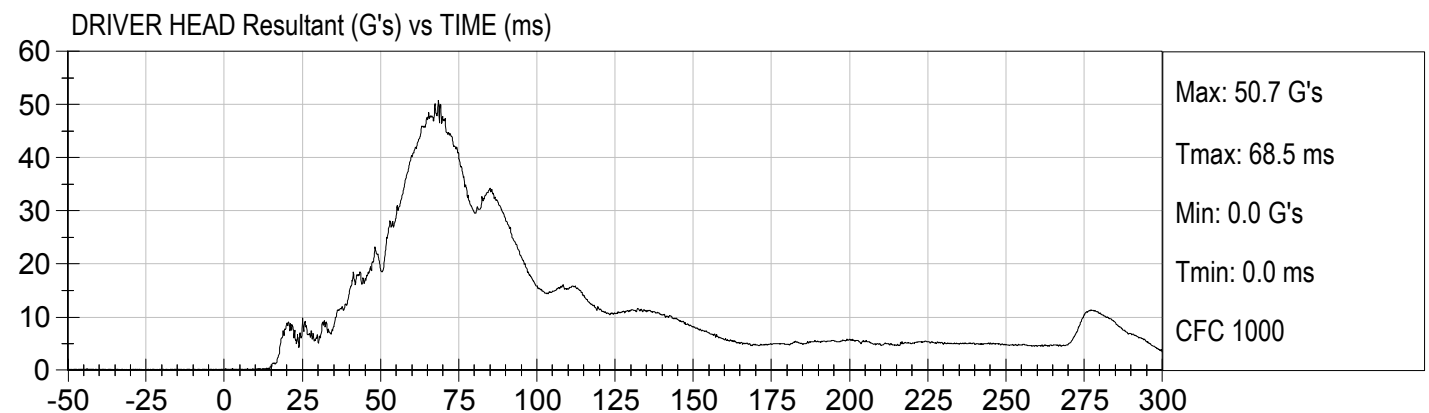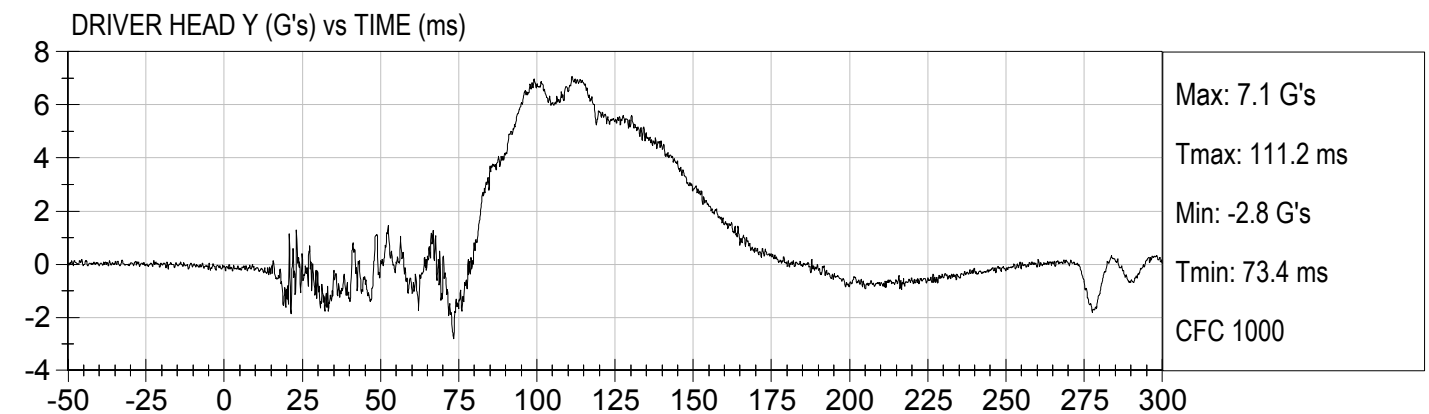
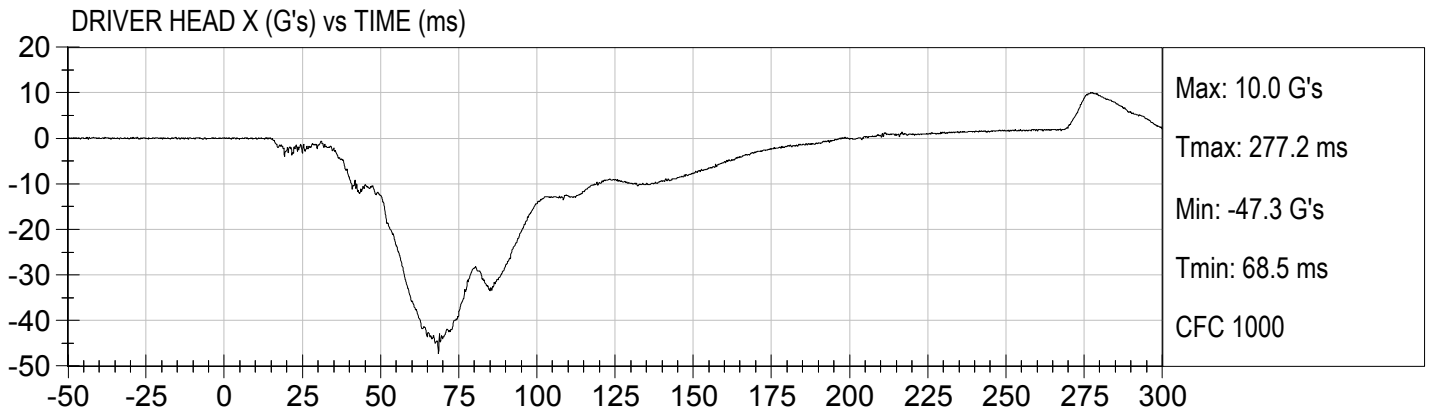





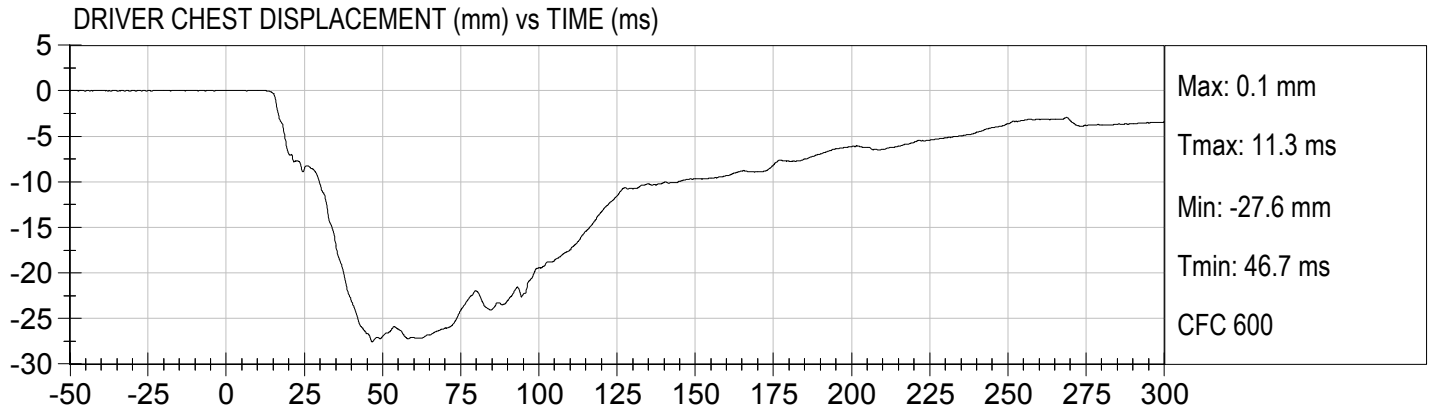


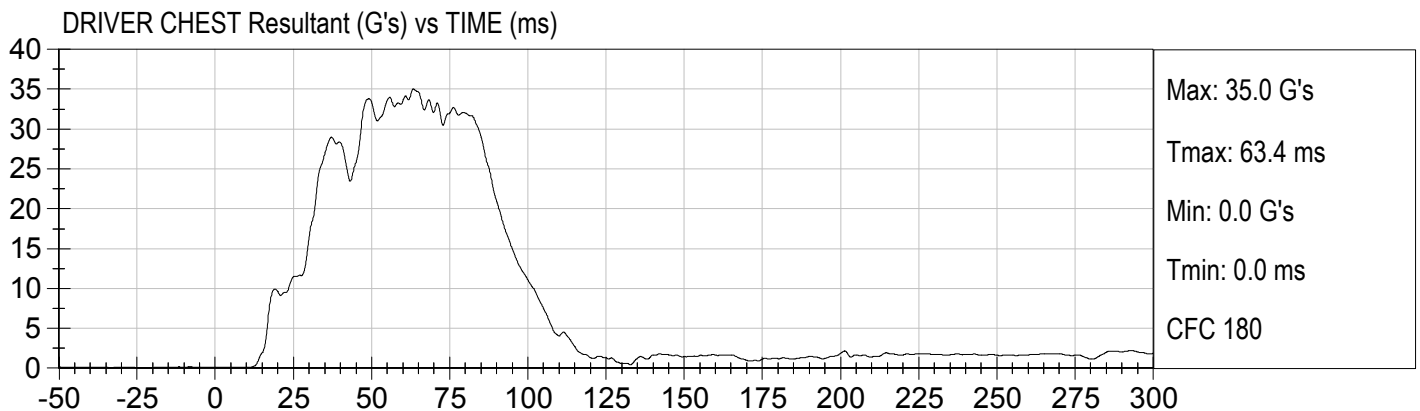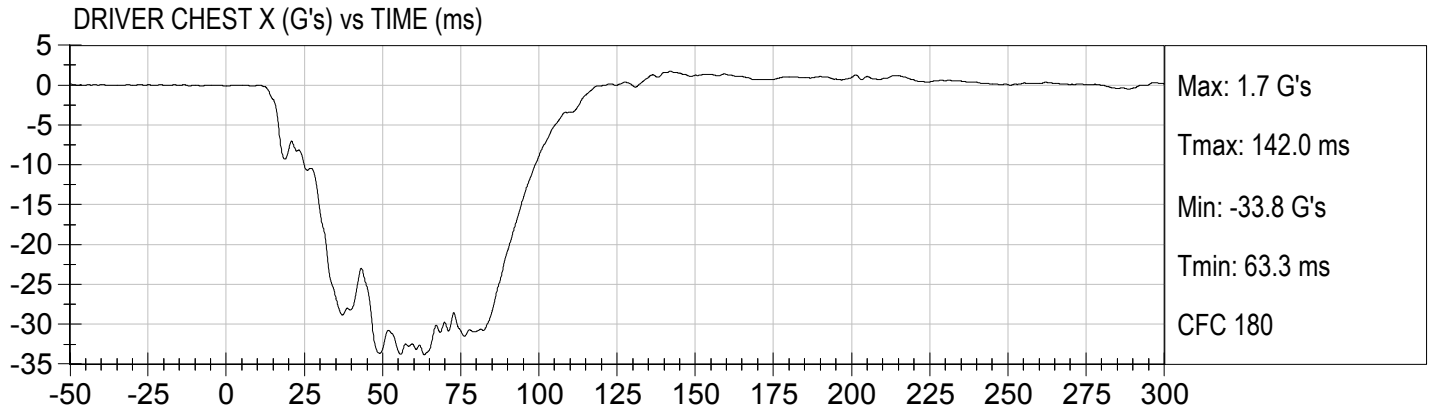




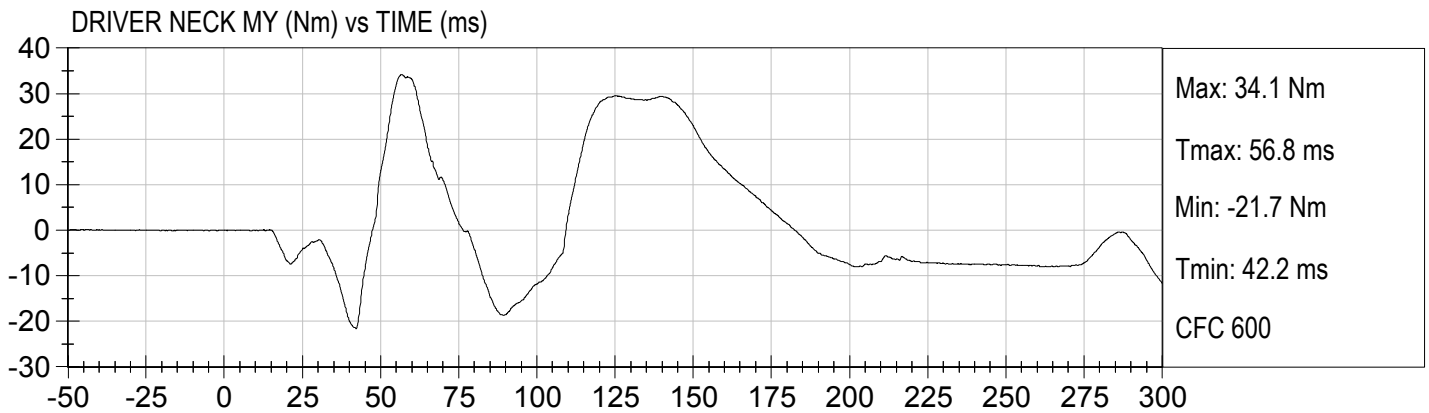
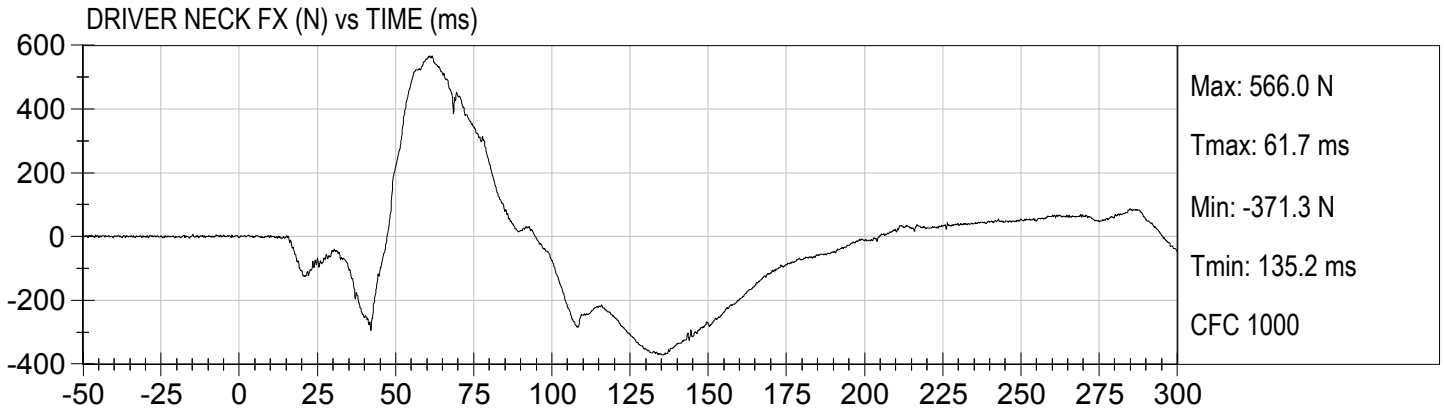


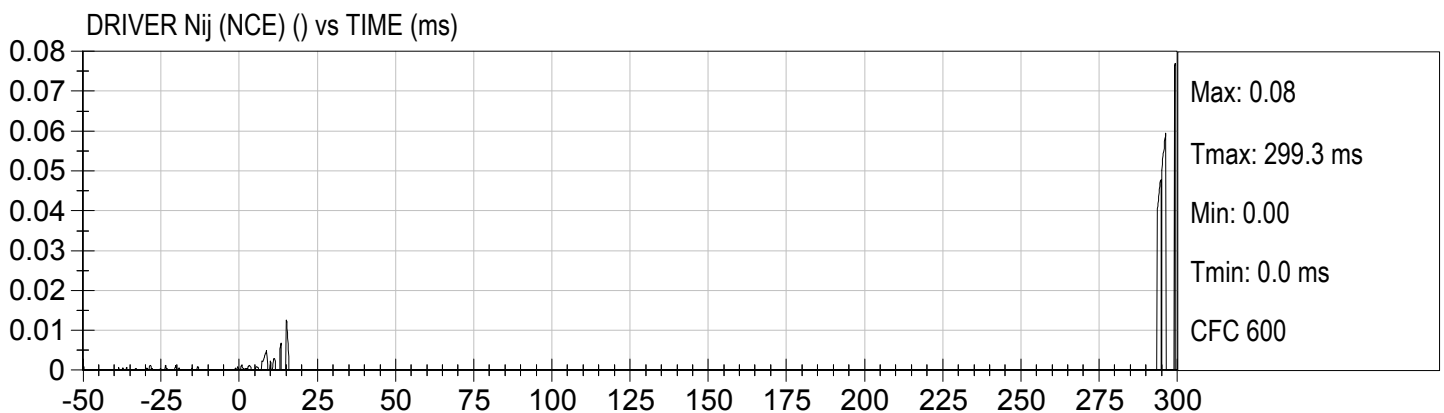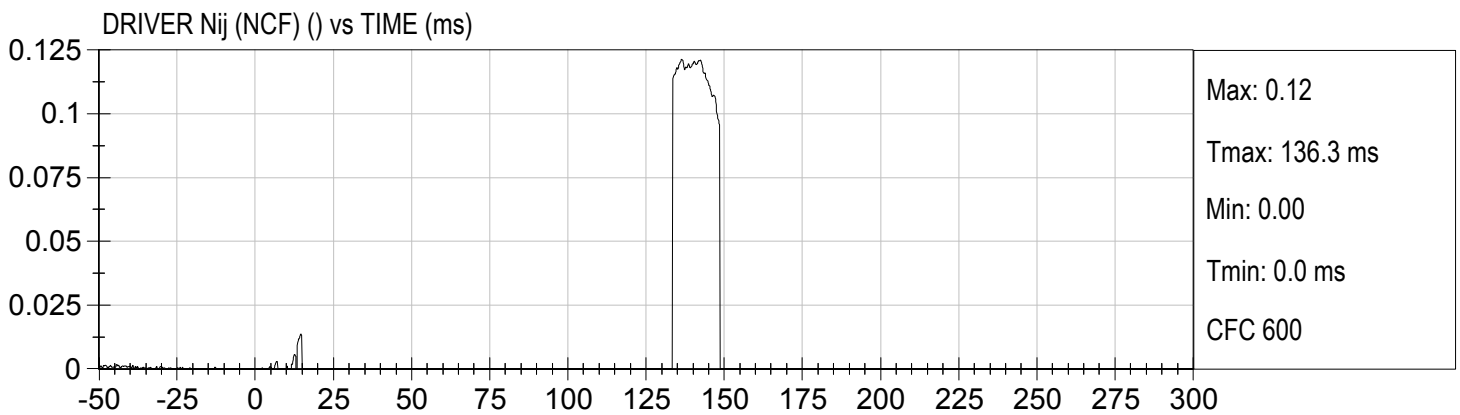
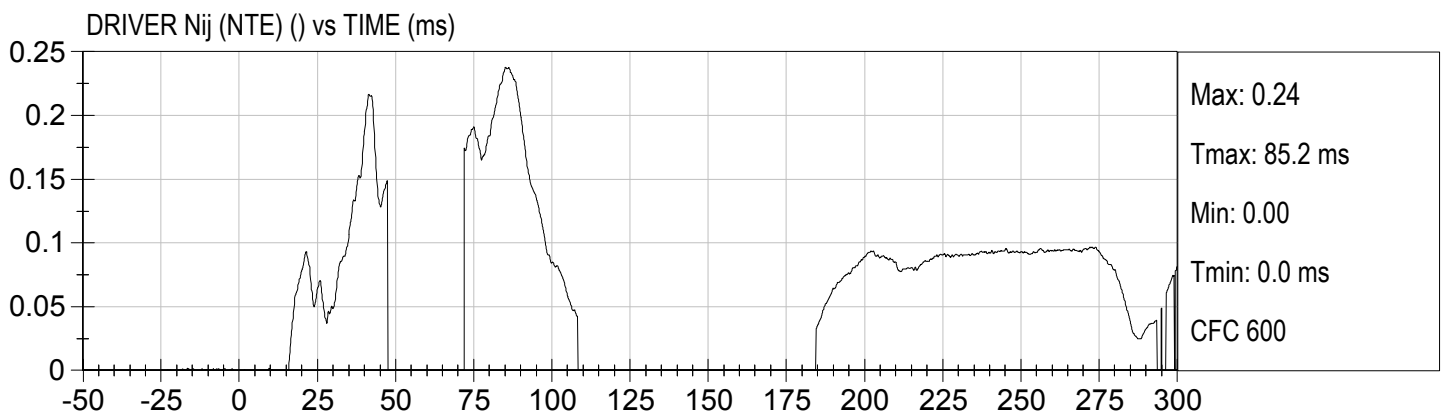
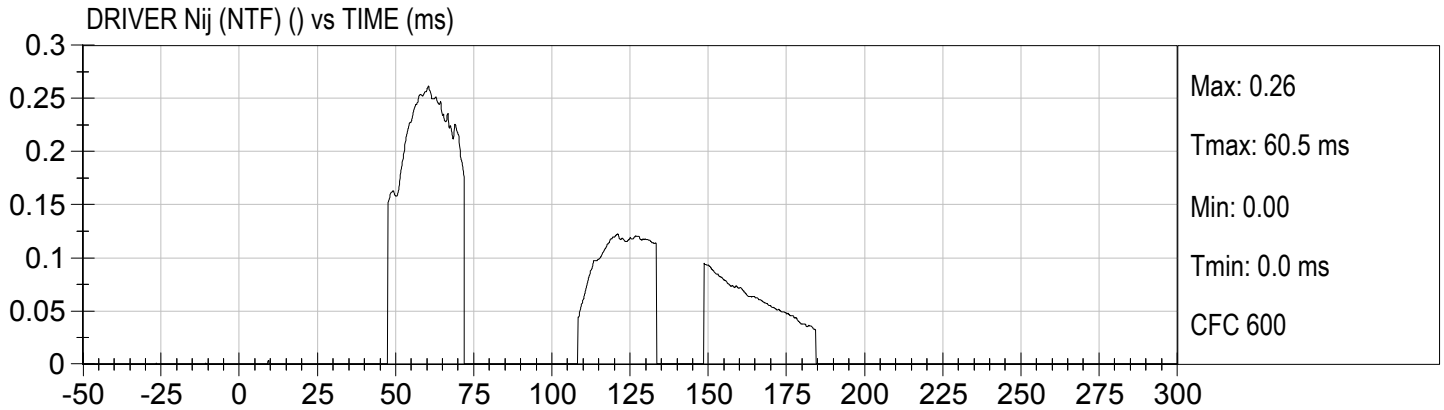




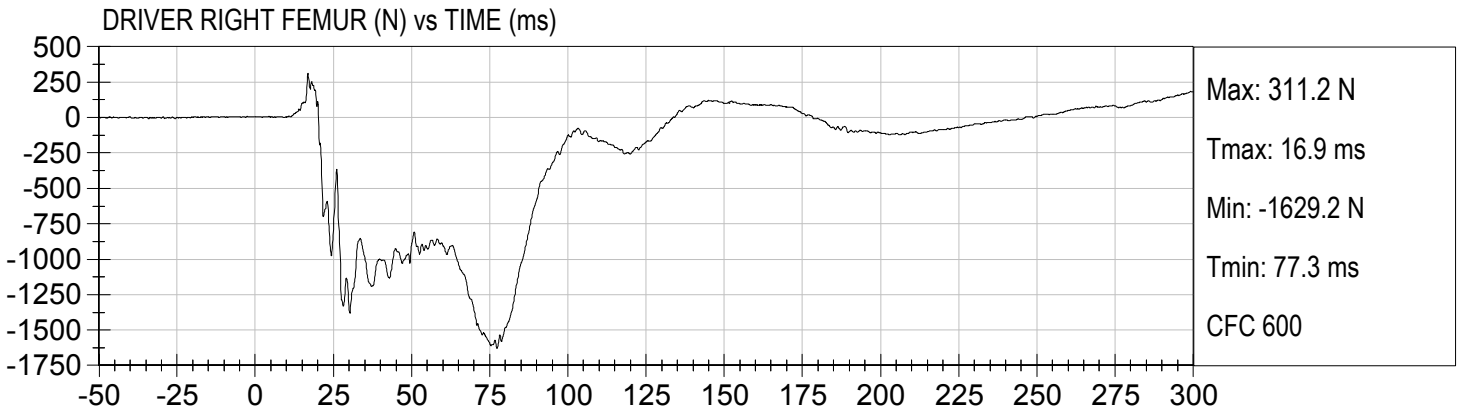
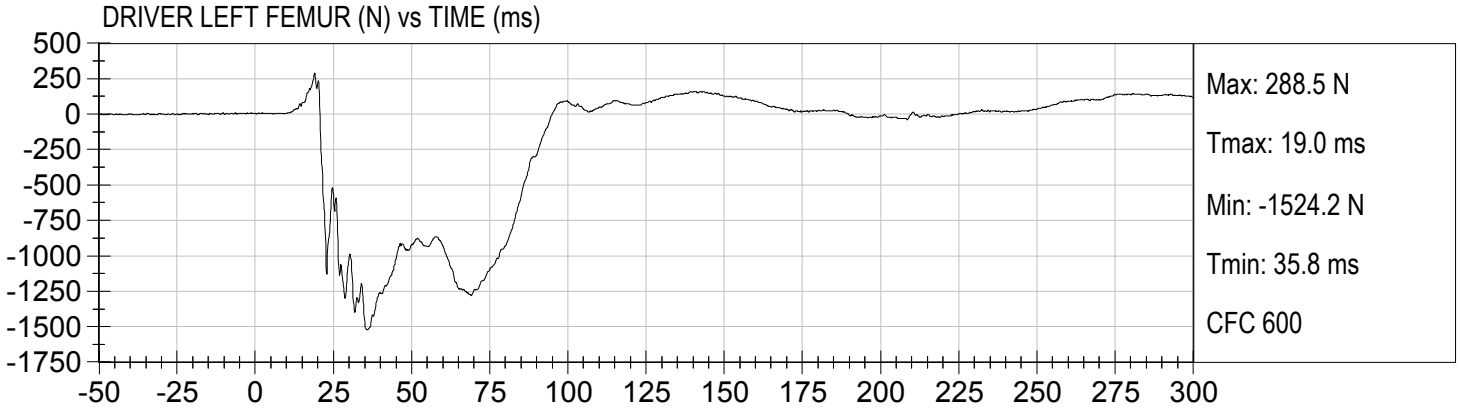


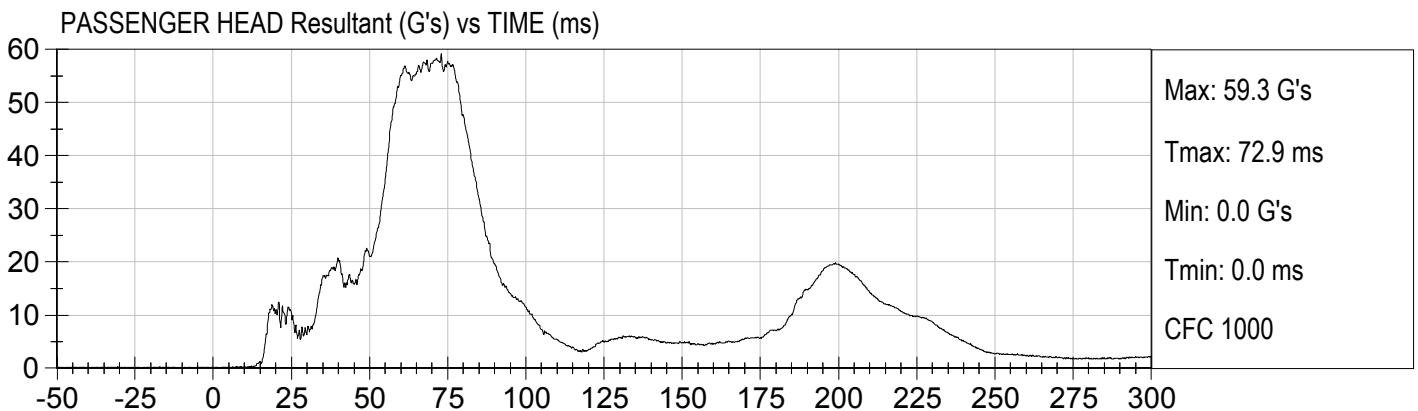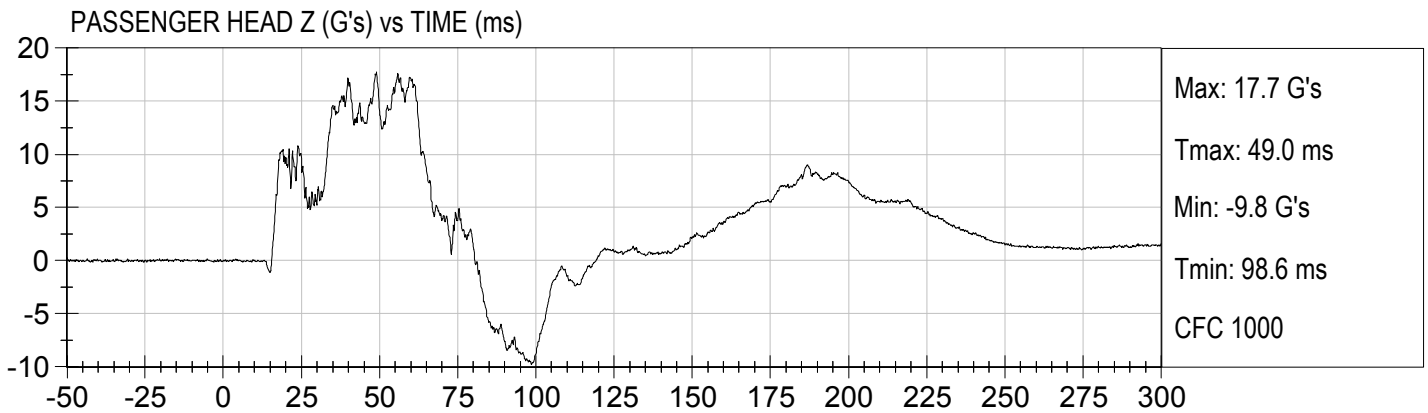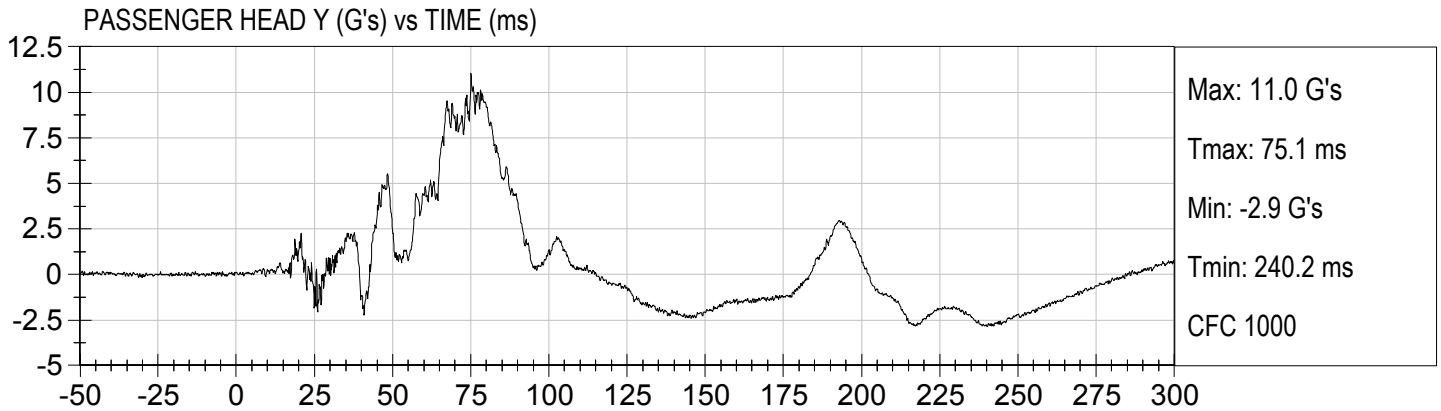
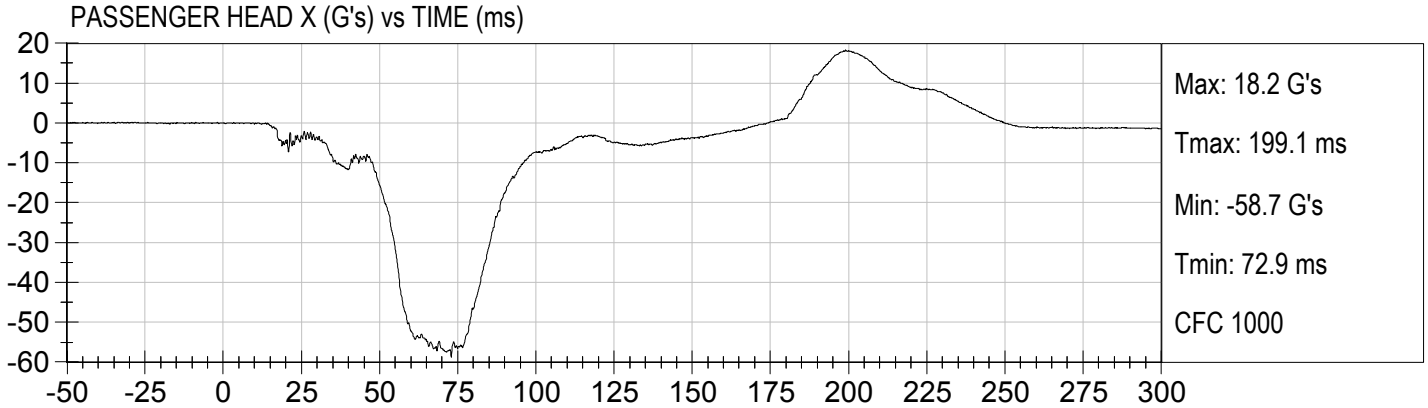


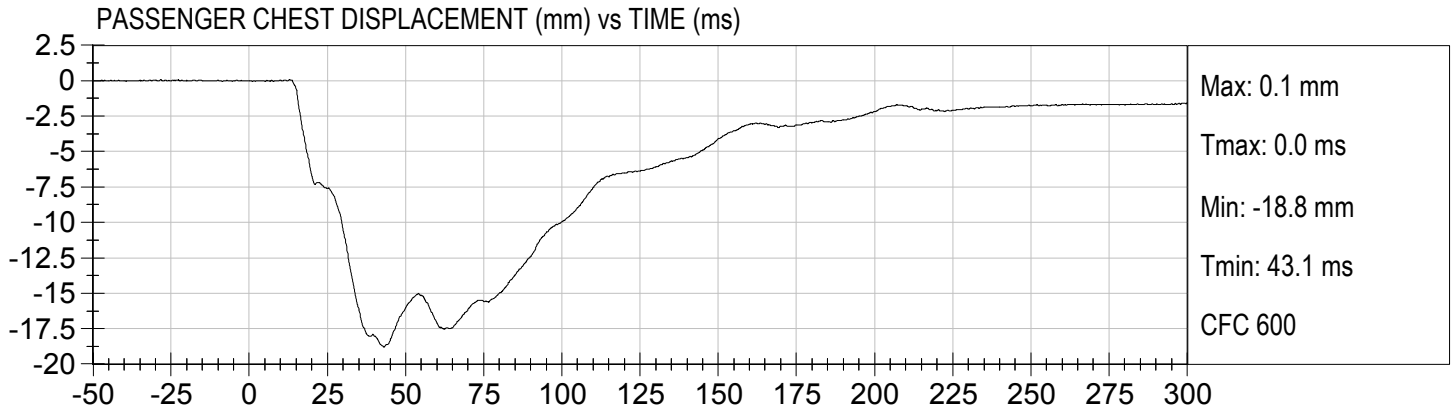

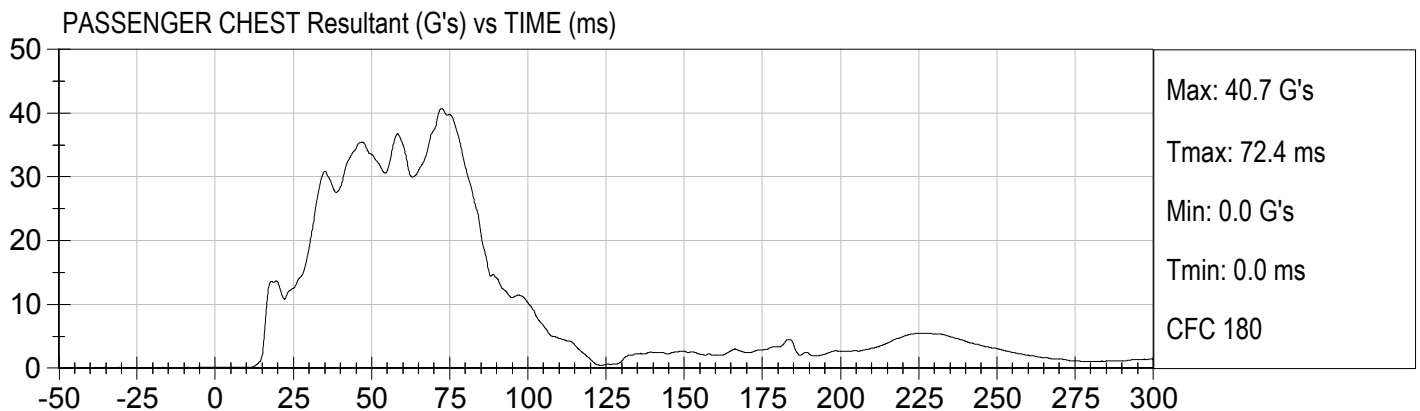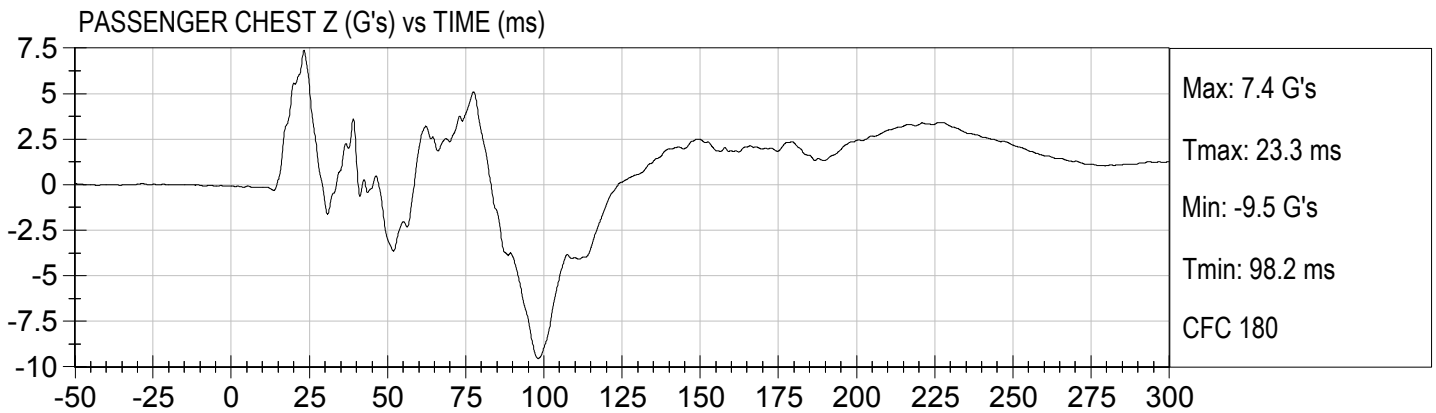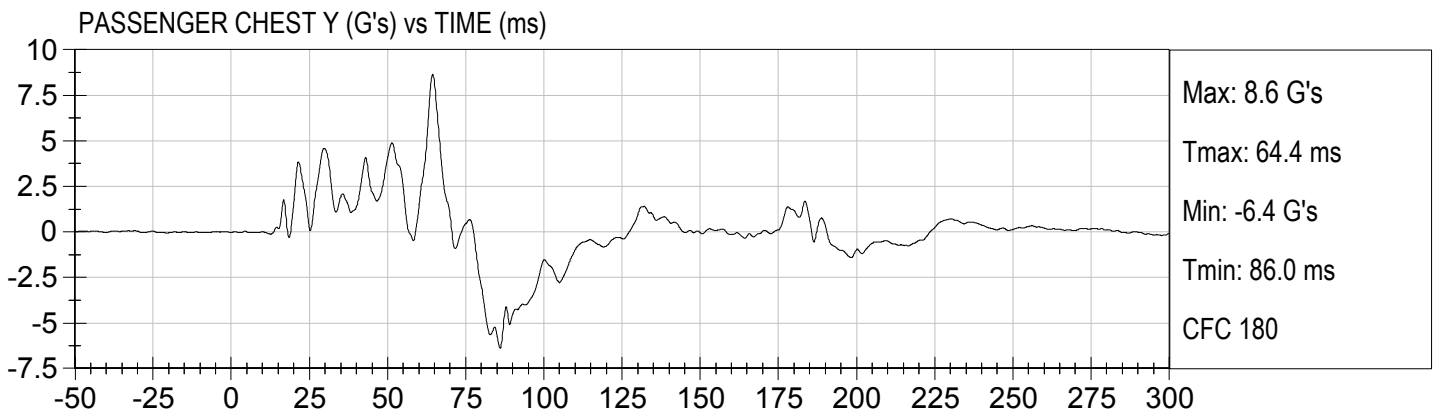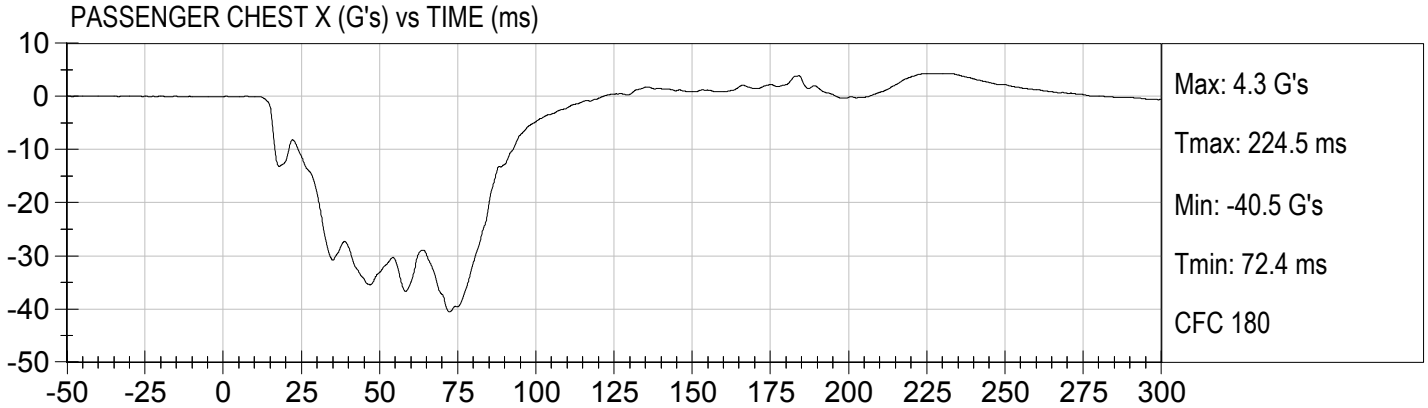

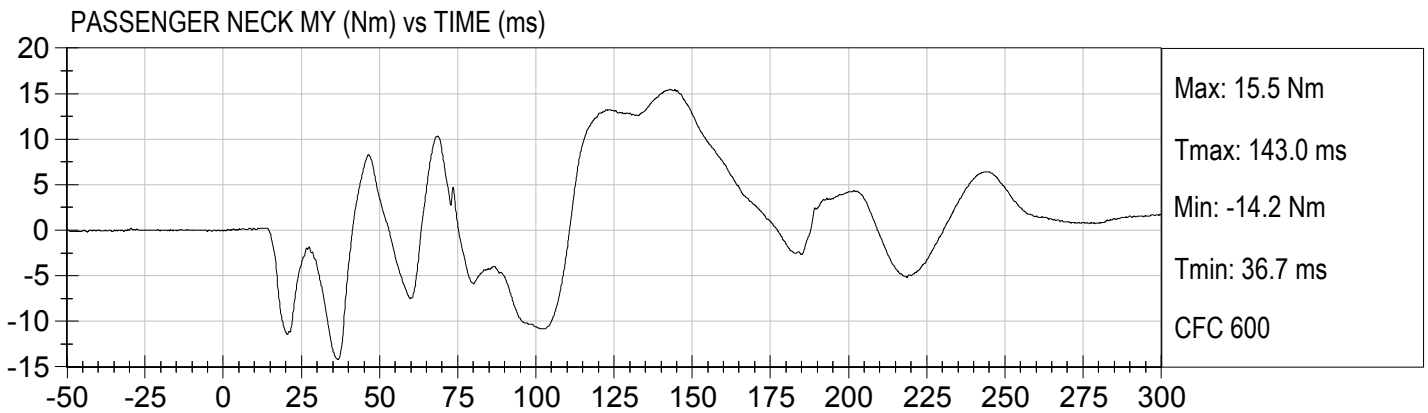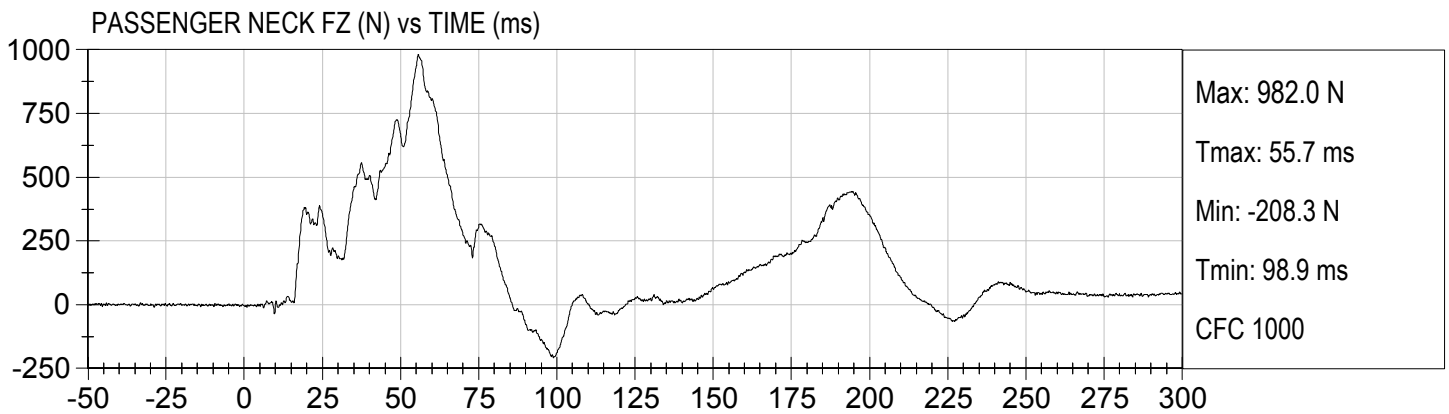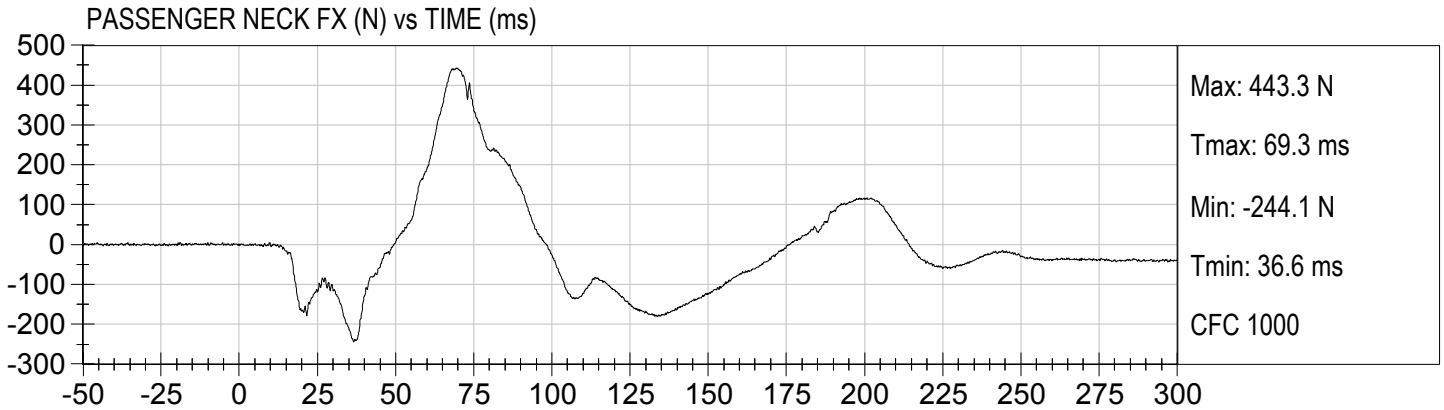

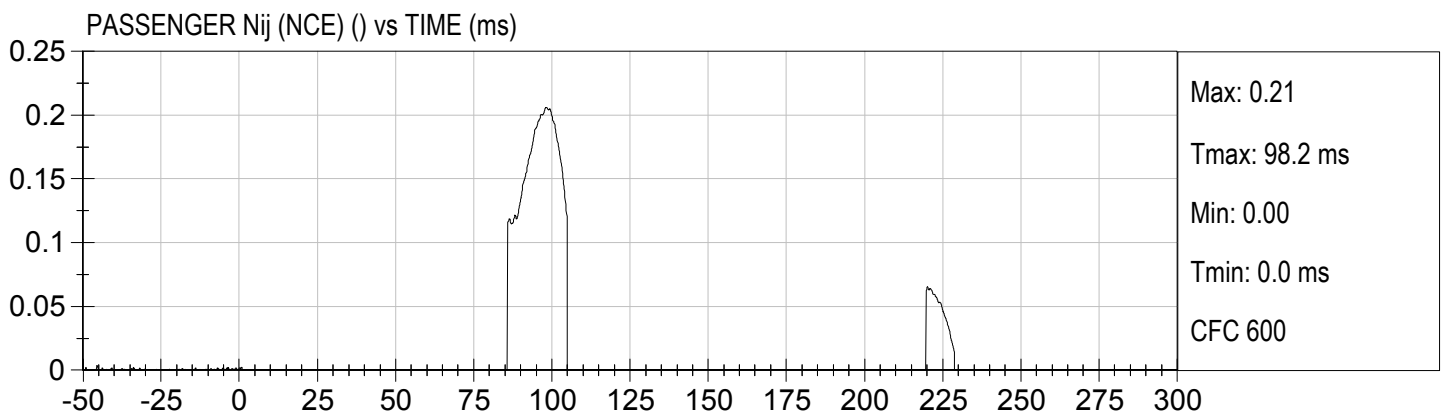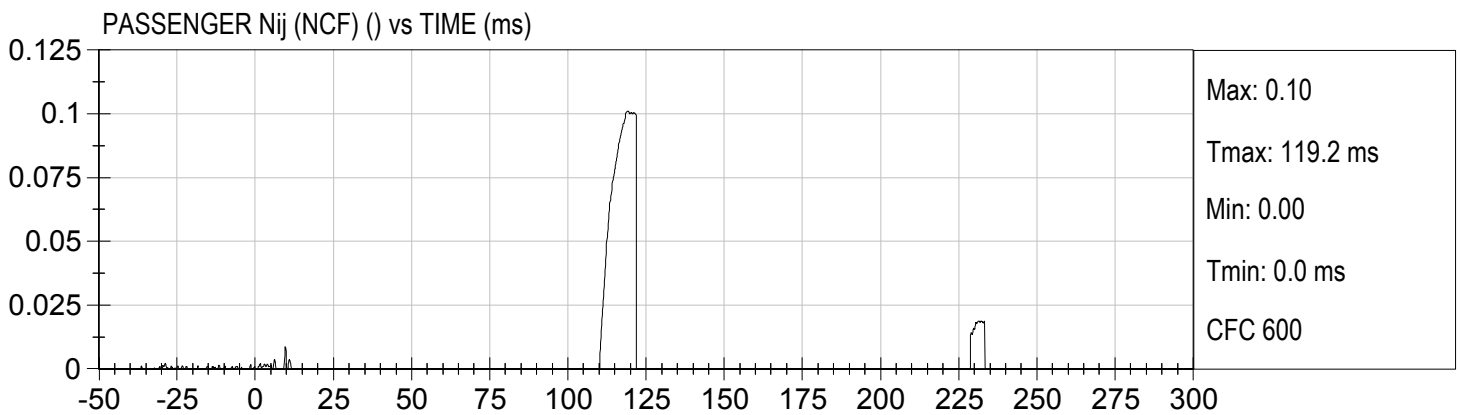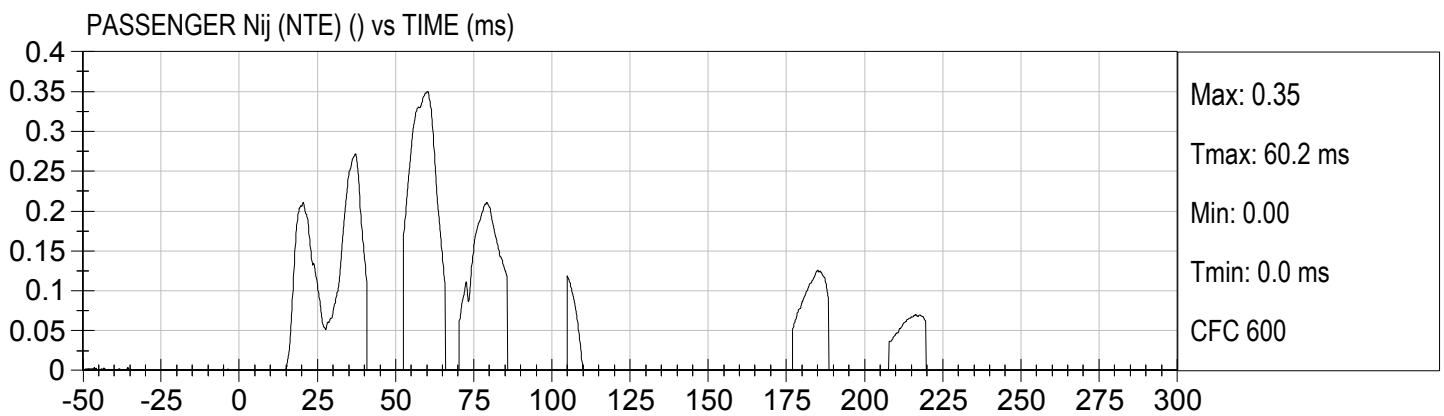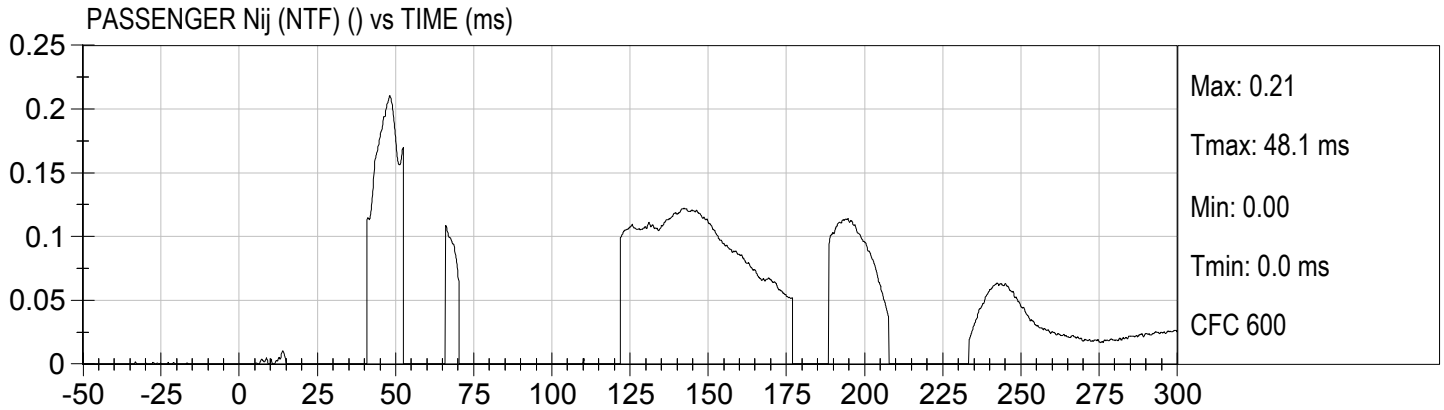

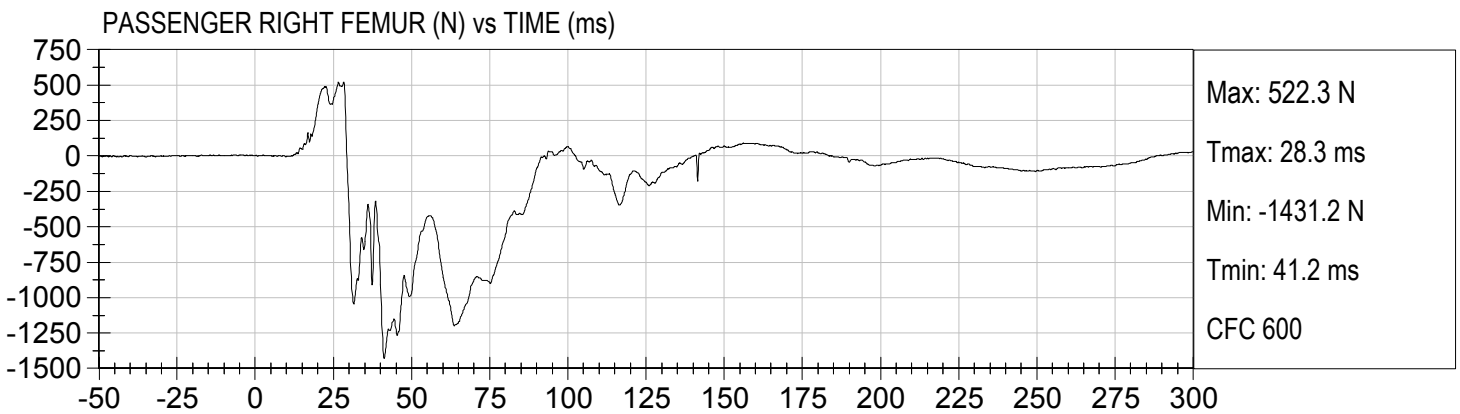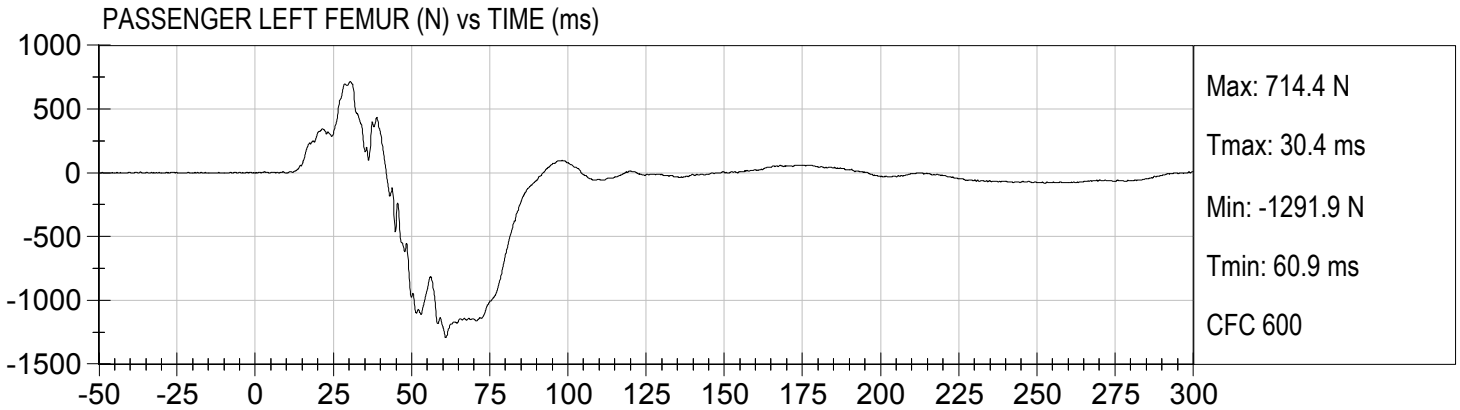

APPENDIX C
DUMMY CALIBRATION AND PERFORMANCE VERIFICATION DATA

**Hybrid III, 50th External Measurements
SN: 351**

HYBRID III, PART 572, SUBPART E EXTERNAL DIMENSIONS				
DIMENSION	DESCRIPTION	DETAILS	ASSEMBLY DIMENSION (inches)	ACTUAL MEASUREMENT
A	TOTAL SITTING HEIGHT	Seat surface to highest point on top of the head.	34.6–35.0	34.8
B	SHOULDER PIVOT HEIGHT	Centerline of shoulder pivot bolt to the seat surface.	19.9-20.5	20.0
C	H-POINT HEIGHT	Reference	3.3-3.5	3.4
D	H-POINT LOCATION FROM BACKLINE	Reference	5.3-5.5	5.5
E	SHOULDER PIVOT FROM BACKLINE	Center of the shoulder clevis to the rear vertical surface of the fixture.	3.3-3.7	3.5
F	THIGH CLEARANCE	Measured at the highest point on the upper femur segment.	5.5-6.1	6.0
G	BACK OF ELBOW TO WRIST PIVOT	back of the elbow flesh to the wrist pivot in line with the elbow and wrist pivots	11.4-12.0	11.8
H	HEAD BACK TO BACKLINE	Back of Skull cap skin to seat rear vertical surface (Reference)	1.6-1.8	1.7
I	SHOULDER TO- ELBOW LENGTH	Measure from the highest point on top of the shoulder clevis to the lowest part of the flesh on the elbow in line with the elbow pivot bolt.	13.0-13.6	13.3
J	ELBOW REST HEIGHT	Measure from the flesh below the elbow pivot bolt to the seat surface.	7.5-8.3	7.8
K	BUTTOCK TO KNEE LENGTH	The forward most part of the knee flesh to the rear vertical surface of the fixture.	22.8-23.8	23.8
L	POPLITEAL HEIGHT	Seat surface to the plane of the horizontal plane of the bottom of the feet.	16.9-17.9	17.0
M	KNEE PIVOT HEIGHT	Centerline of knee pivot bolt to the horizontal plane of the bottom of the feet.	19.1-19.7	19.5
N	BUTTOCK POPLITEAL LENGTH	The rearmost surface of the lower leg to the same point on the rear surface of the buttocks used for dim. "K".	17.8-18.8	18.8

HYBRID III, SUBPART E EXTERIOR DIMENSIONS, continued

DIMENSION	DESCRIPTION	DETAILS		ACTUAL MEASUREMENT
O	CHEST DEPTH WITHOUT JACKET	Measured 16.9-17.1 in. above seat surface	8.4-9.0	8.5
P	FOOT LENGTH	Tip of toe to rear of heel	9.9-10.5	10.3
V	SHOULDER BREADTH	Outside edges of right and left shoulder clevises	16.3-17.2	16.5
W	FOOT BREADTH	The widest part of the foot	3.6-4.2	4.0
Y	CHEST CIRCUMFERENCE (WITH CHEST JACKET)	Measured 16.9-17.1 in. above seat surface	38.2-39.4	39.2
Z	WAIST CIRCUMFERENCE	Measured 8.9-9.1 in. above seat surface	32.9-34.1	33.7
AA	REFERENCE LOCATION FOR MEASUREMENT OF CHEST CIRCUMFERENCE	Reference	16.9-17.1	17.0
BB	REFERENCE LOCATION FOR MEASUREMENT OF WAIST CIRCUMFERENCE	Reference	8.9-9.1	9.0

NOTE: THE H-POINT IS LOCATED 1.83 INCHES FORWARD AND 2.57 INCHES DOWN FROM THE CENTER OF THE PELVIS ANGLE REFERENCE HOLE.

**MGA RESEARCH CORPORATION
HEAD DROP TEST
HYBRID III 50TH PERCENTILE MALE**

ATD Serial No: 351

Test ID: D154041

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Peak Resultant Acceleration	G's	225 to 275	266	Pass
Peak Lateral Acceleration	G's	<= +/- 15.0	2.0	Pass
Unimodal	N/A	Yes	Yes	Pass
Oscillations	N/A	within 10% of peak	Yes	Pass
Overall Test Results				Pass

David Schoedel



 Laboratory Technician



12/07/2015

 Test Date

Jessica Hall

 Approved By

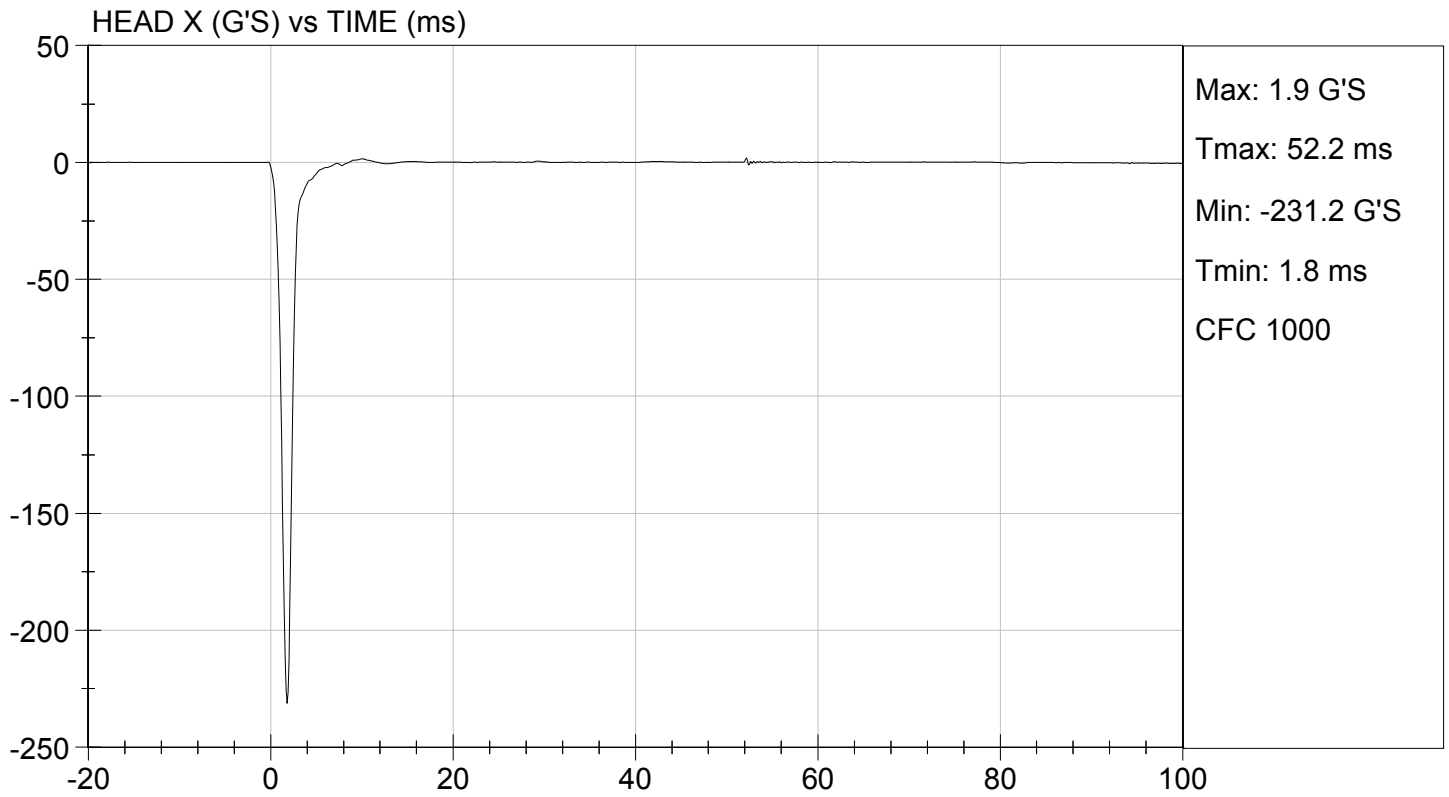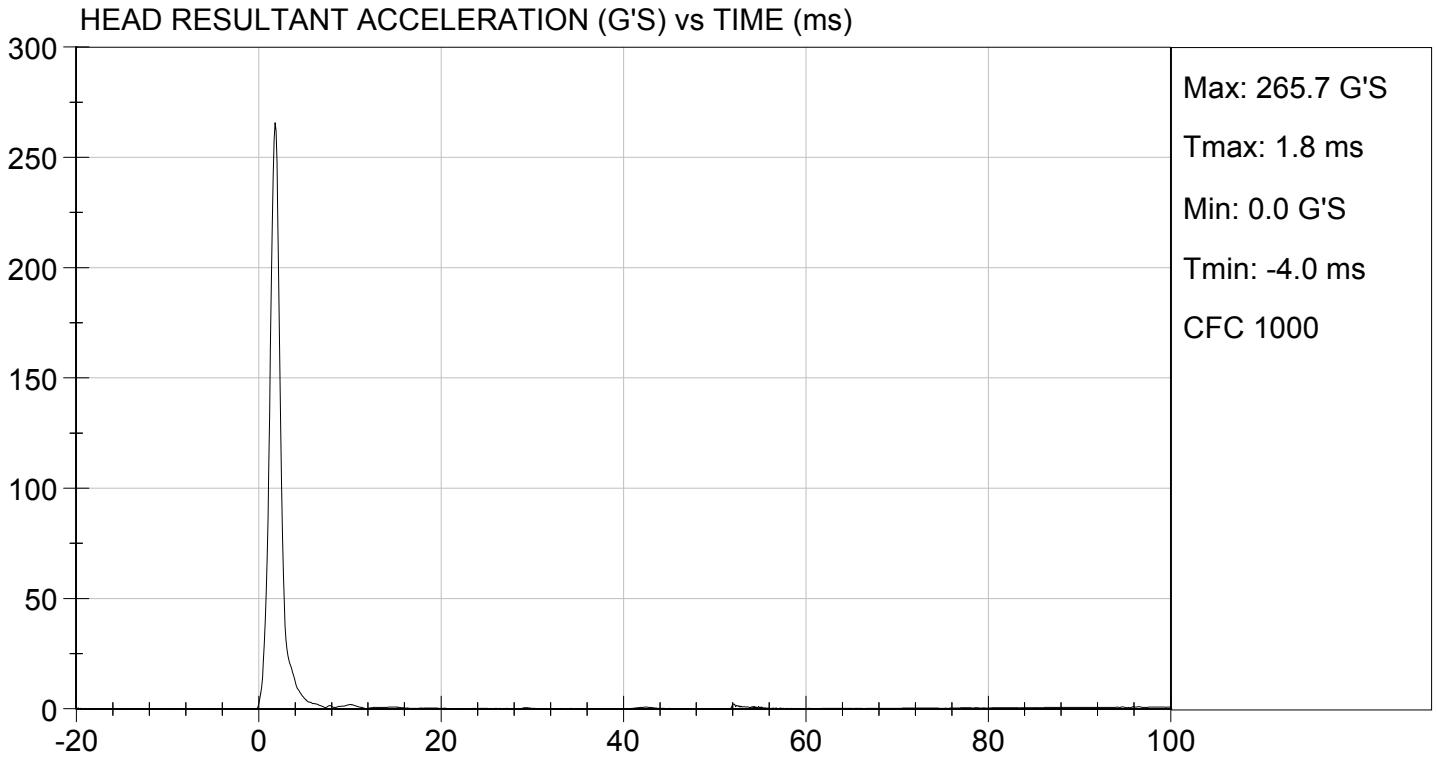

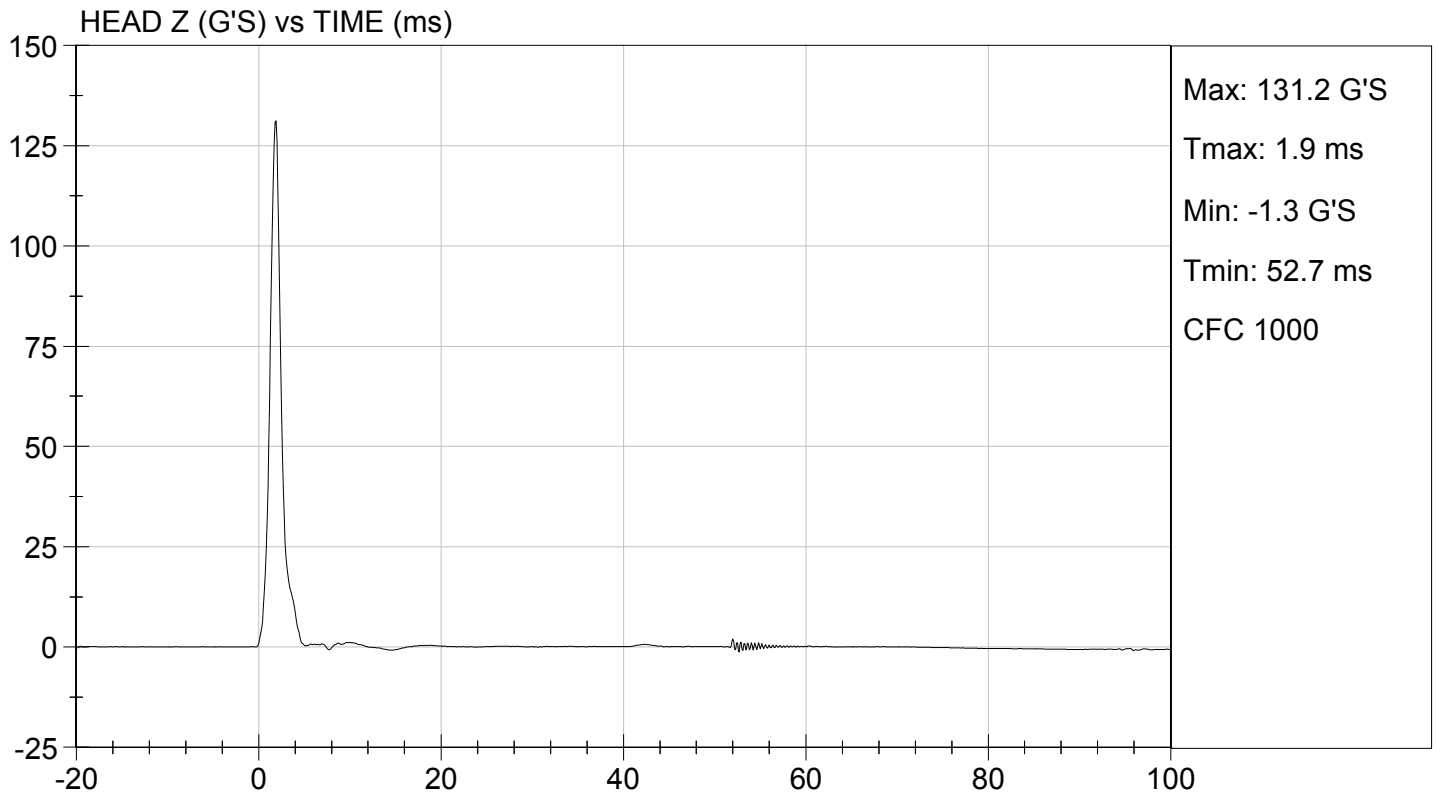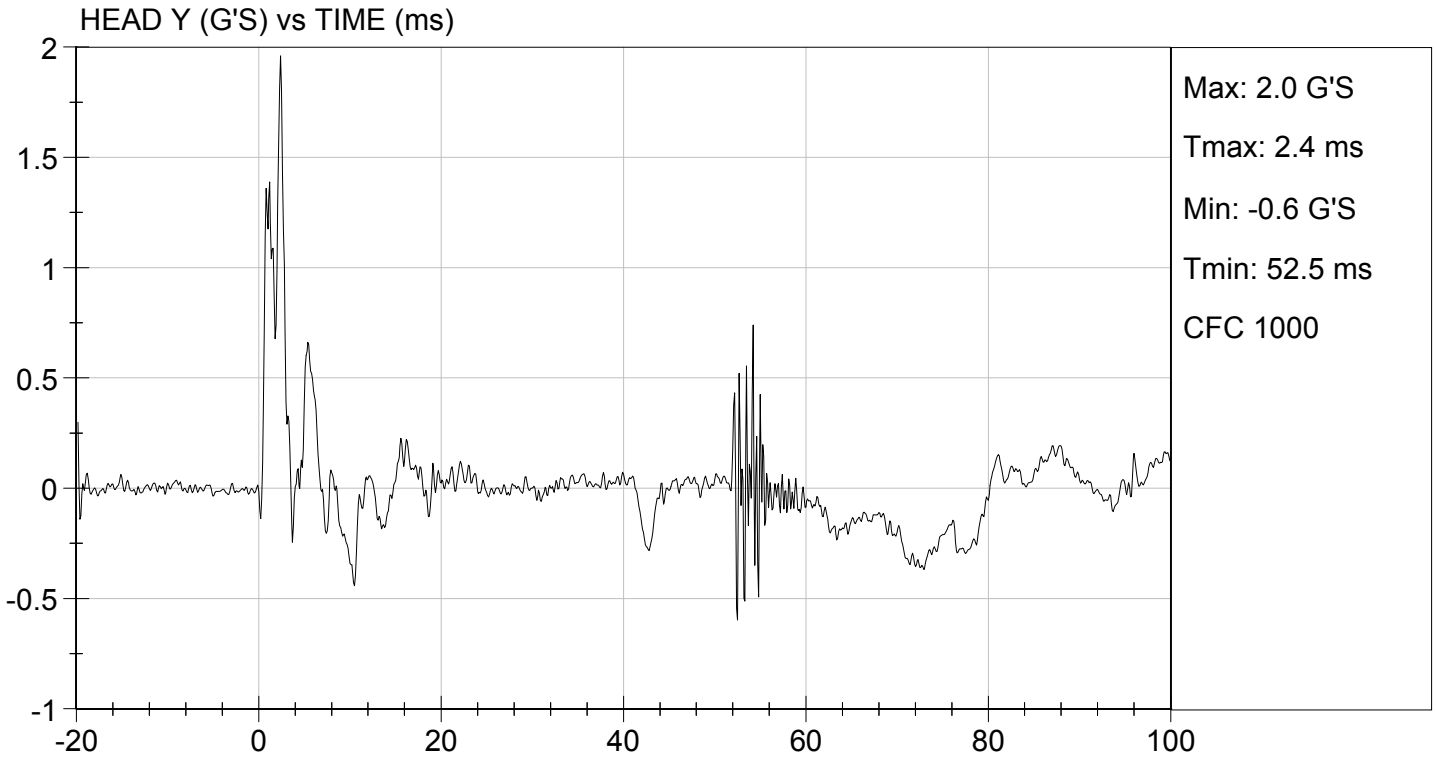

MGA RESEARCH CORPORATION
NECK FLEXION TEST
HYBRID III 50TH PERCENTILE MALE

ATD Serial No: 351



Test I.D: D154042


Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.4	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Velocity		m/s	6.89 to 7.13	7.06	Pass
Pendulum Deceleration	10 ms	G's	22.50 to 27.50	24.03	Pass
	20 ms	G's	17.60 to 22.60	19.72	Pass
	30 ms	G's	12.50 to 18.50	15.89	Pass
Peak Pendulum Deceleration After 30 ms		G's	<= 29.0	15.8	Pass
Deceleration Decay Time to Cross 5 G's		ms	34.0 to 42.0	36.8	Pass
Maximum "D" Plane Rotation	Maximum	Deg	64.0 to 78.0	69.9	Pass
	Time	ms	57.0 to 64.0	57.7	Pass
"D" Plane Rotation Decay Time To Zero Crossing		ms	113.0 to 128.0	116.0	Pass
Moment About Occipital Condyle	Maximum	Nm	88.1 to 108.5	88.5	Pass
	Time	ms	47.0 to 58.0	49.7	Pass
Positive Moment Decay Time To Zero Crossing		ms	97.0 to 107.0	103.4	Pass
Overall Test Results					Pass

David Schoedel
 Laboratory Technician

12/07/2015
 Test Date

Jessica Hall
 Approved By

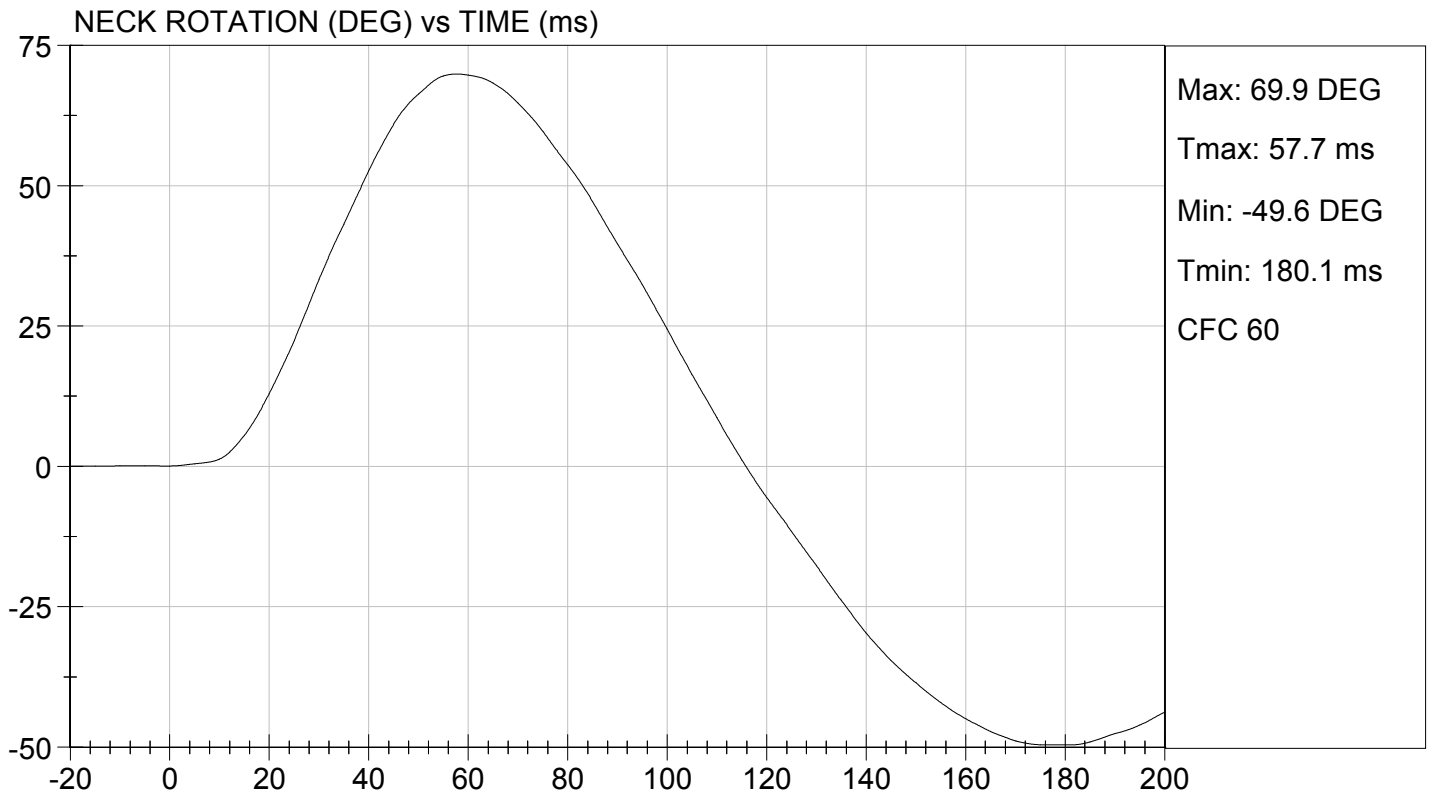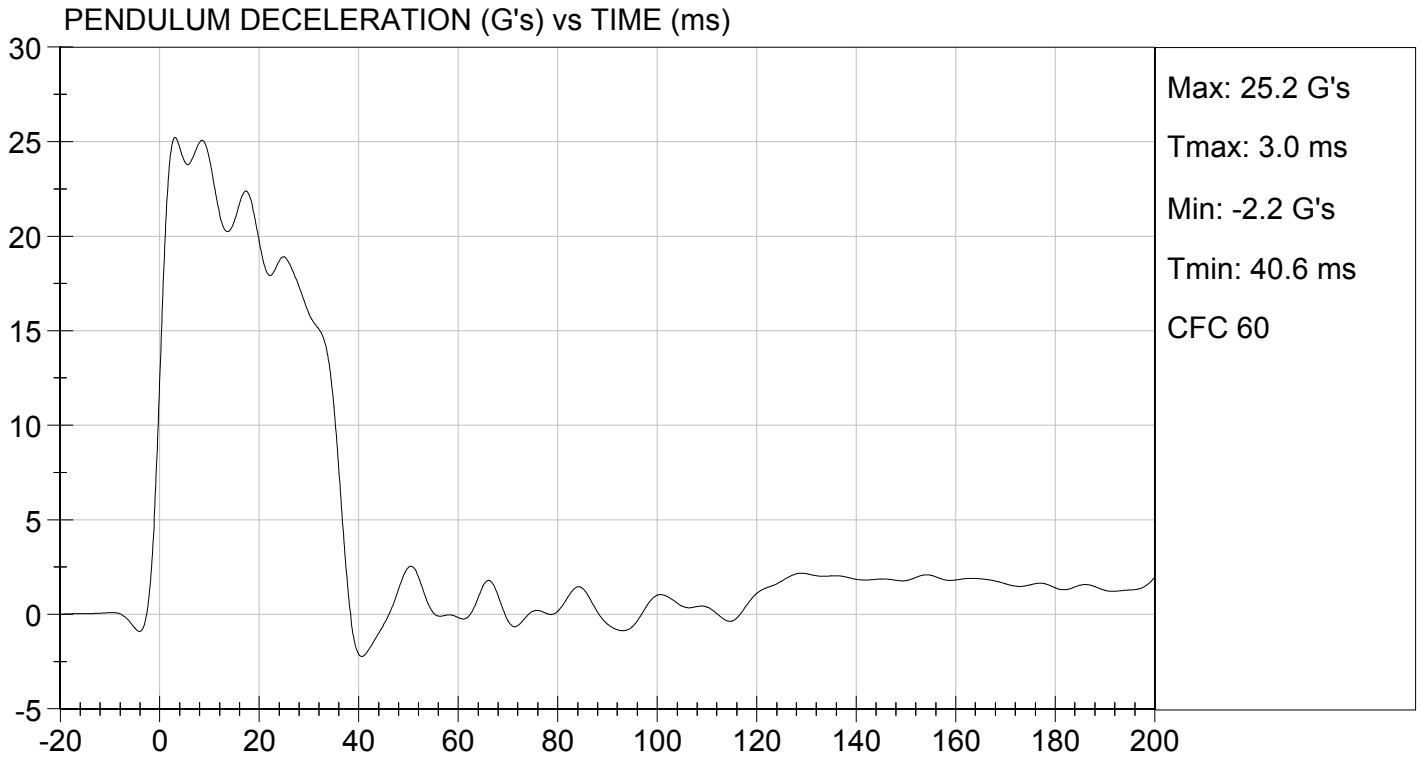

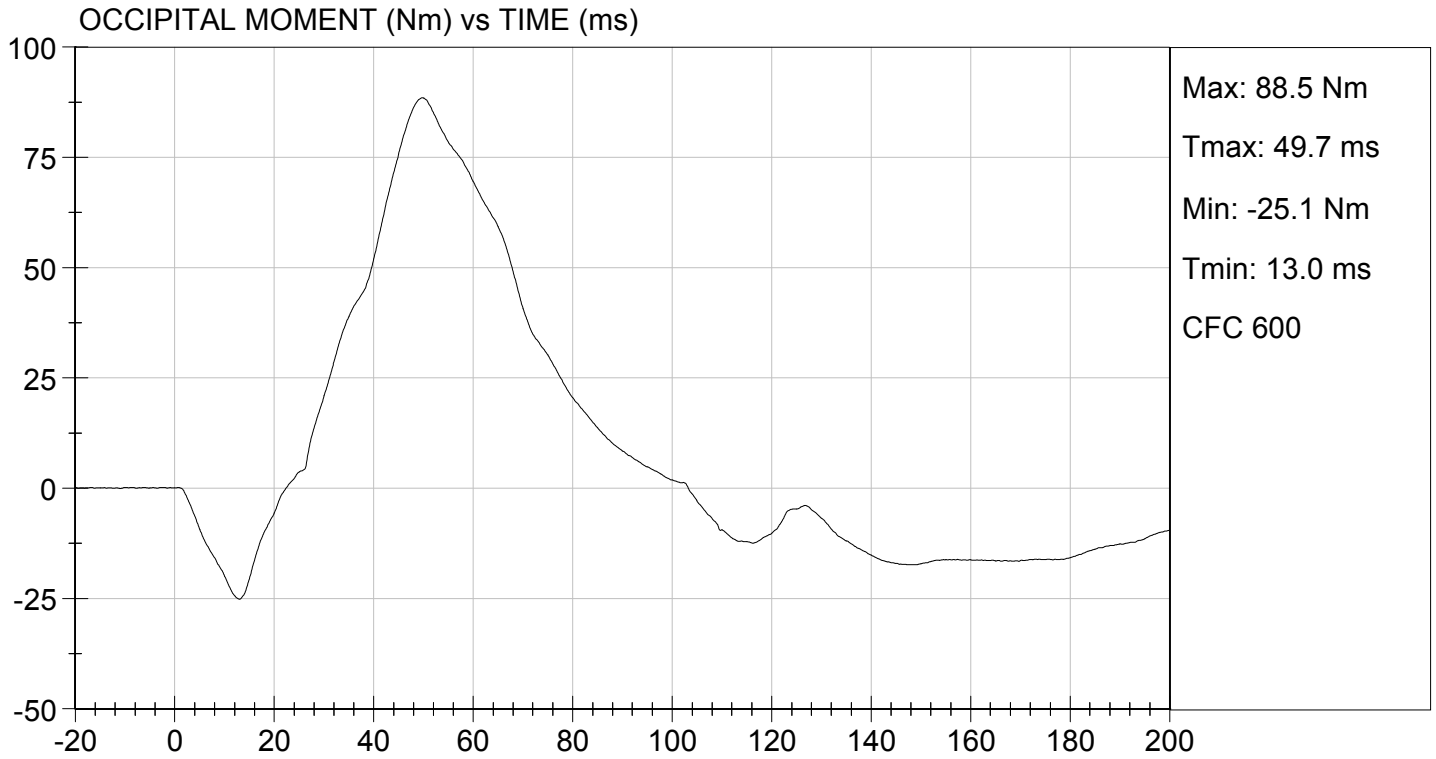

MGA RESEARCH CORPORATION
NECK EXTENSION TEST
HYBRID III 50TH PERCENTILE MALE

ATD Serial No: 351



Test I.D.: D154043


Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.4	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Velocity		m/s	5.95 to 6.19	6.05	Pass
Pendulum Deceleration	10 ms	G's	17.20 to 21.20	17.72	Pass
	20 ms	G's	14.00 to 19.00	16.58	Pass
	30 ms	G's	11.00 to 16.00	12.73	Pass
Peak Pendulum Deceleration After 30 ms		G's	<= 22.0	12.7	Pass
Deceleration Decay Time to Cross 5 G's		ms	38.0 to 46.0	43.7	Pass
Maximum "D" Plane Rotation	Maximum	Degrees	81.0 to 106.0	96.3	Pass
	Time	ms	72.0 to 82.0	80.4	Pass
"D" Plane Rotation Decay Time To Zero Crossing		ms	147.0 to 174.0	167.7	Pass
Moment About Occipital Condyle	Maximum	Nm	-52.9 to -79.9	-53.4	Pass
	Time	ms	65.0 to 79.0	74.4	Pass
Negative Moment Decay Time To Zero Crossing		ms	120.0 to 148.0	146.1	Pass
Overall Test Results					Pass

David Schoedel
 Laboratory Technician

12/07/2015
 Test Date

Jessica Hall
 Approved By

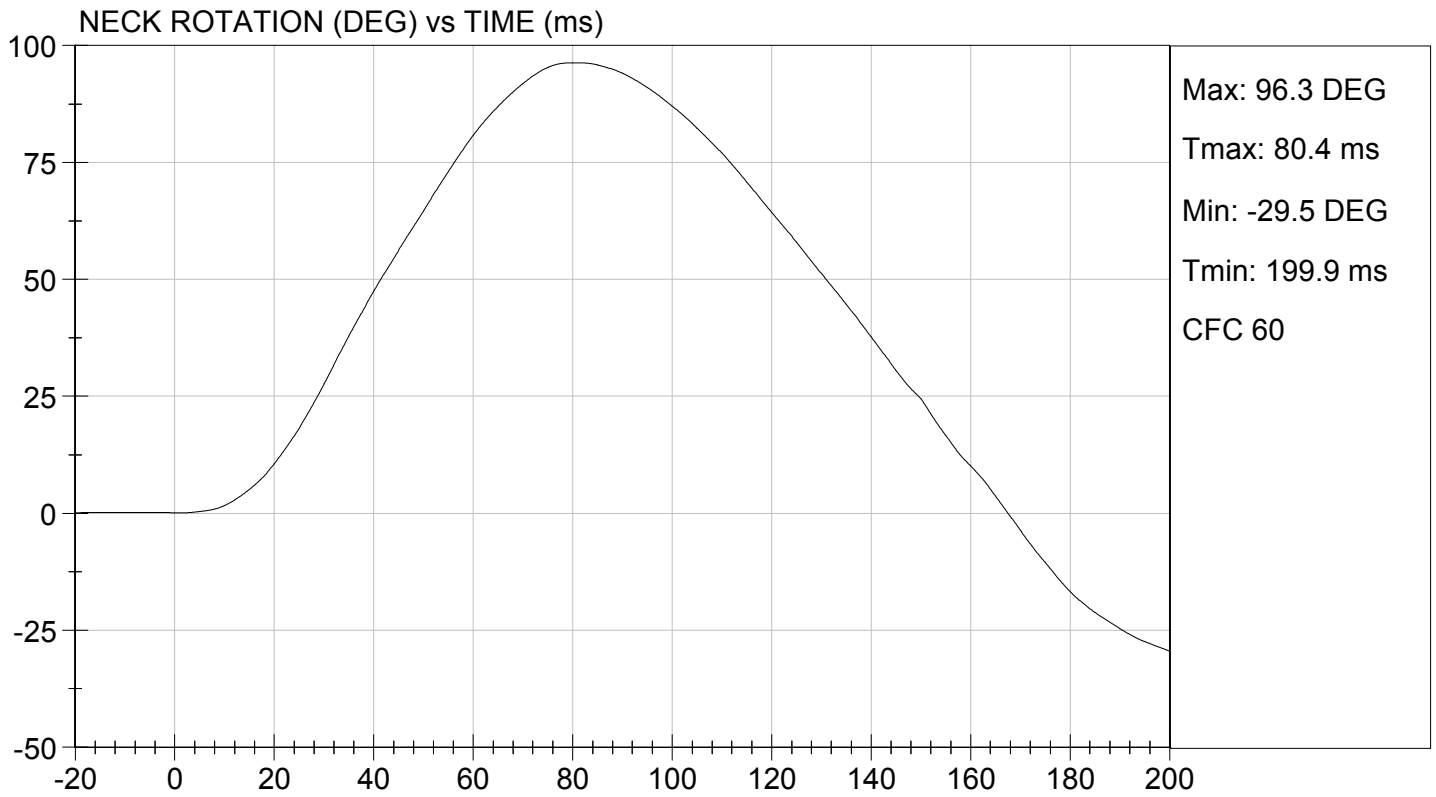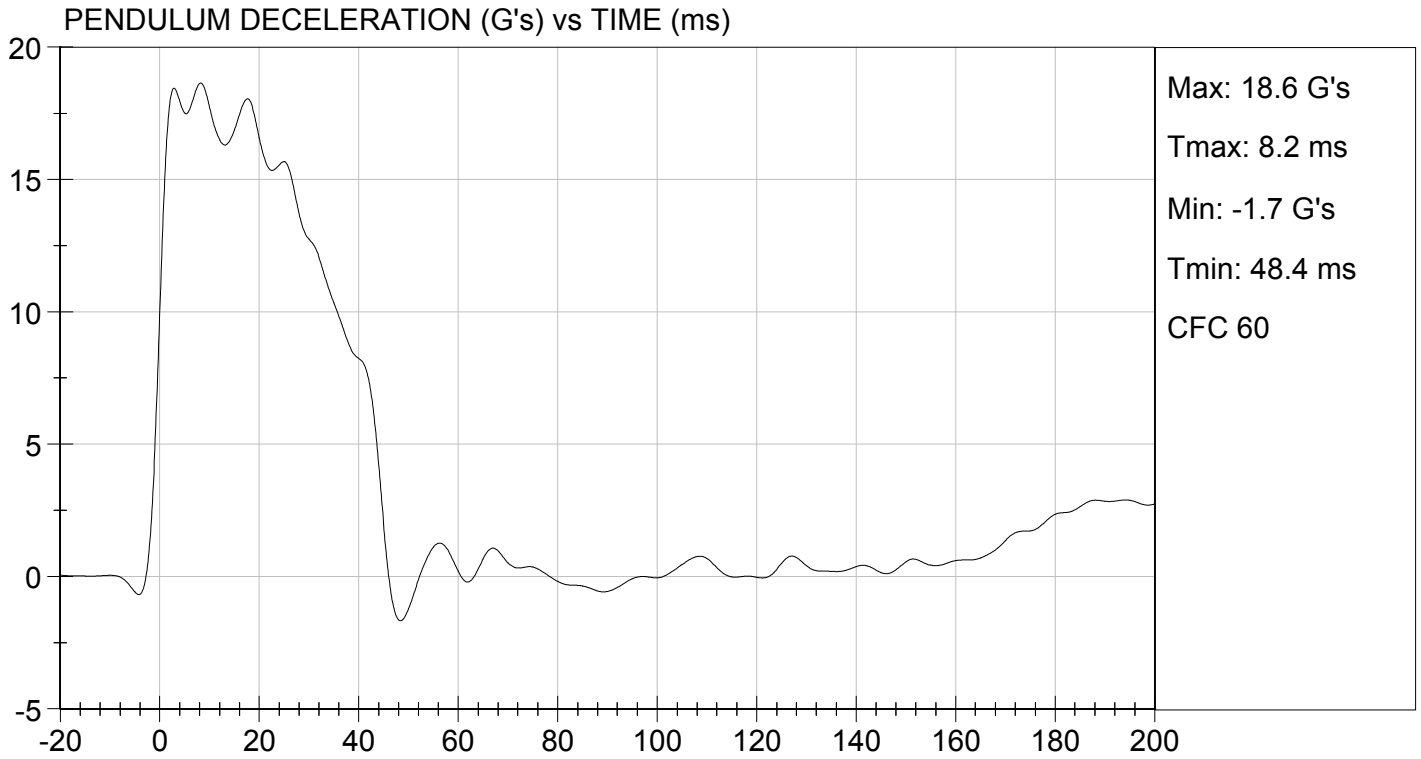

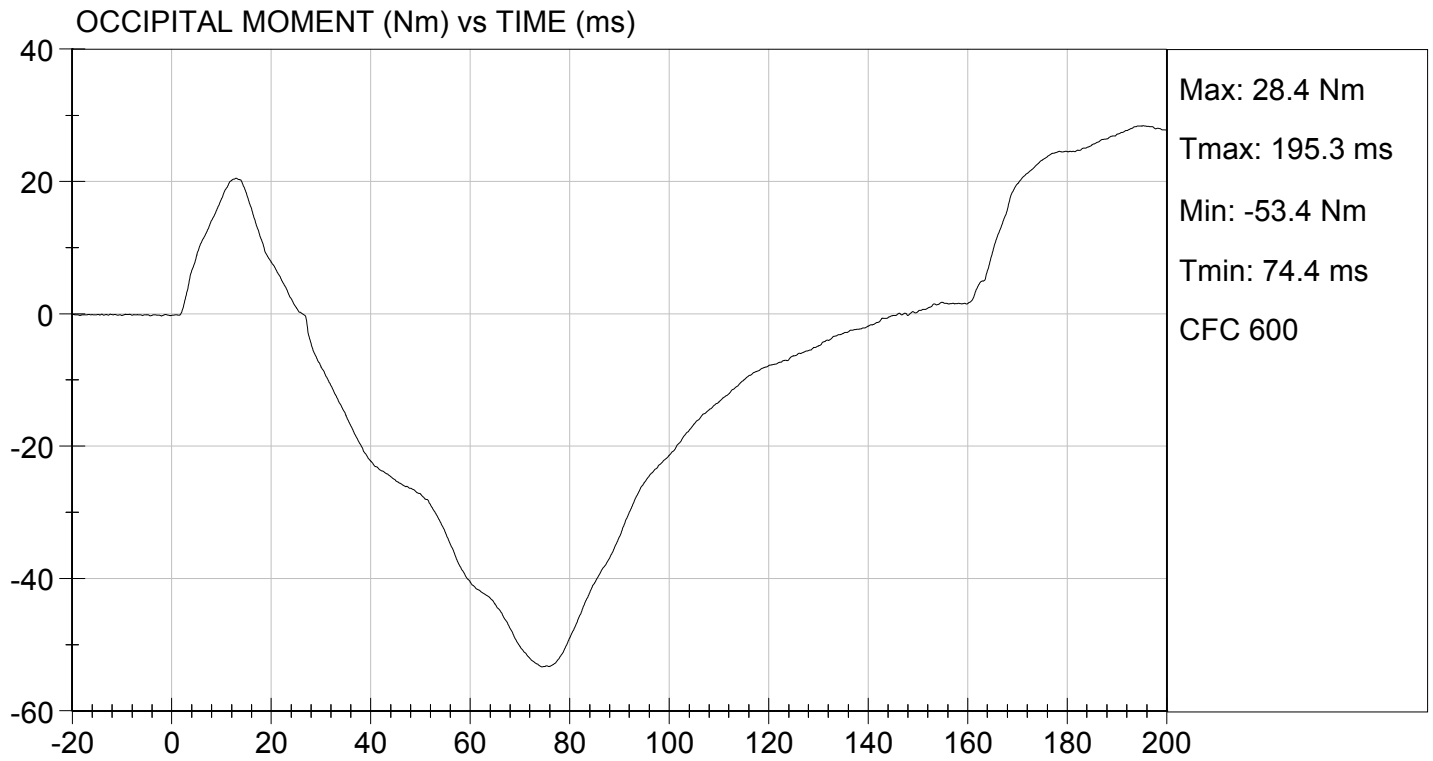

**MGA RESEARCH CORPORATION
THORAX IMPACT
HYBRID III 50TH PERCENTILE MALE**

ATD Serial No: 351

Test I.D.: D154044

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	20.6 to 22.2	21.5	Pass
Laboratory Relative Humidity	%	10 to 70	31	Pass
Probe Velocity	m/s	6.58 to 6.82	6.68	Pass
Peak Probe Force	N	5159 to 5893	5,437	Pass
Peak Sternum Displacement	cm	6.35 to 7.26	7.13	Pass
Internal Hysteresis	%	69 to 85	72	Pass
Overall Test Results				Pass

David Schoedel


 Laboratory Technician

12/07/2015

 Test Date

Jessica Hall

 Approved By

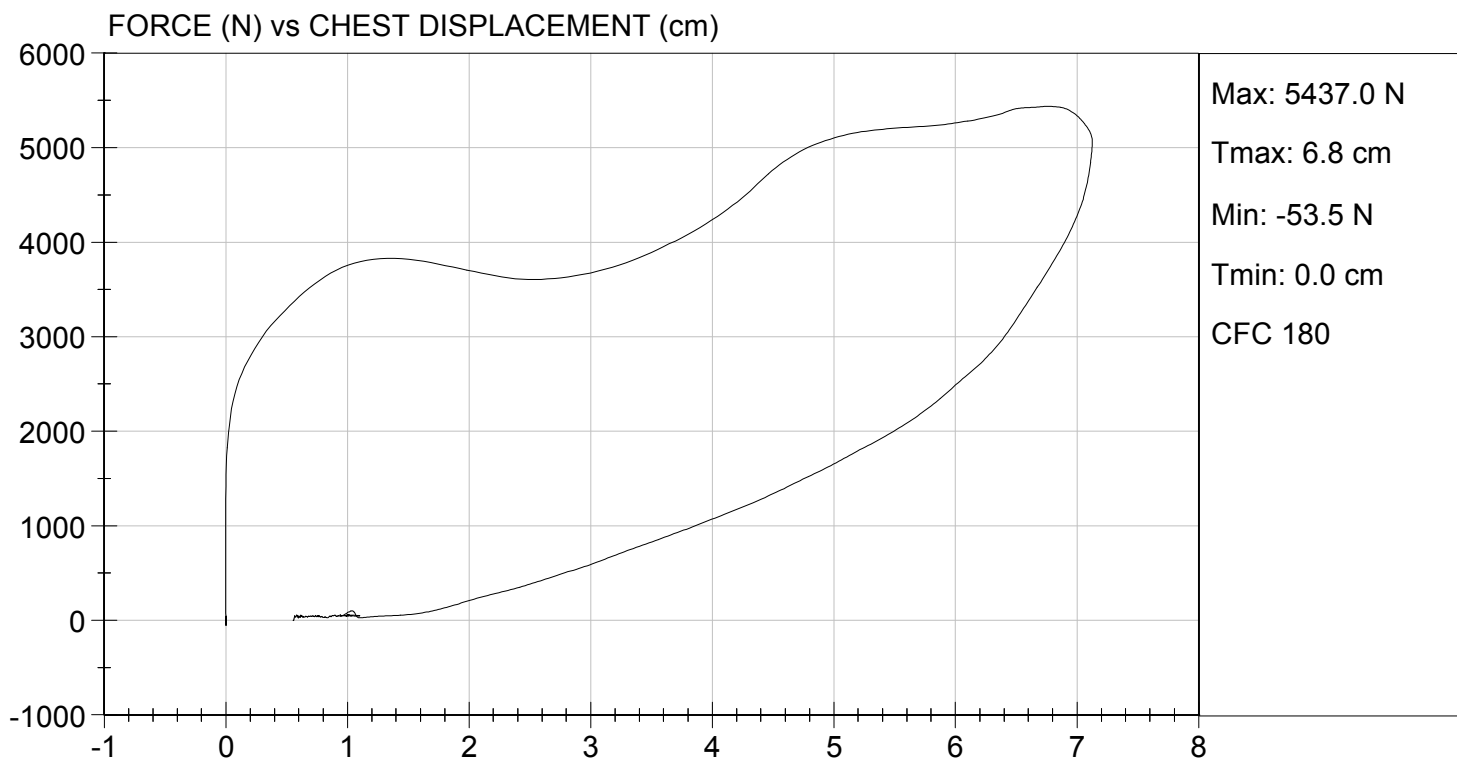

MGA RESEARCH CORPORATION
RIGHT KNEE IMPACT TEST
HYBRID III 50TH PERCENTILE MALE

ATD Serial No: 351

Test I.D: D154045

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	2.07 to 2.13	2.12	Pass
Peak Probe Force	N	4715 to 5782	5,322	Pass
Overall Test Results				Pass

David Schoedel
 Laboratory Technician


12/07/2015
 Test Date

Jessica Hall
 Approved By



TEST DESC: RIGHT KNEE
VELOCITY: 6.97 ft/s, 2.12 m/s

TEST DATE: 12/07/2015
TEST #: D154045

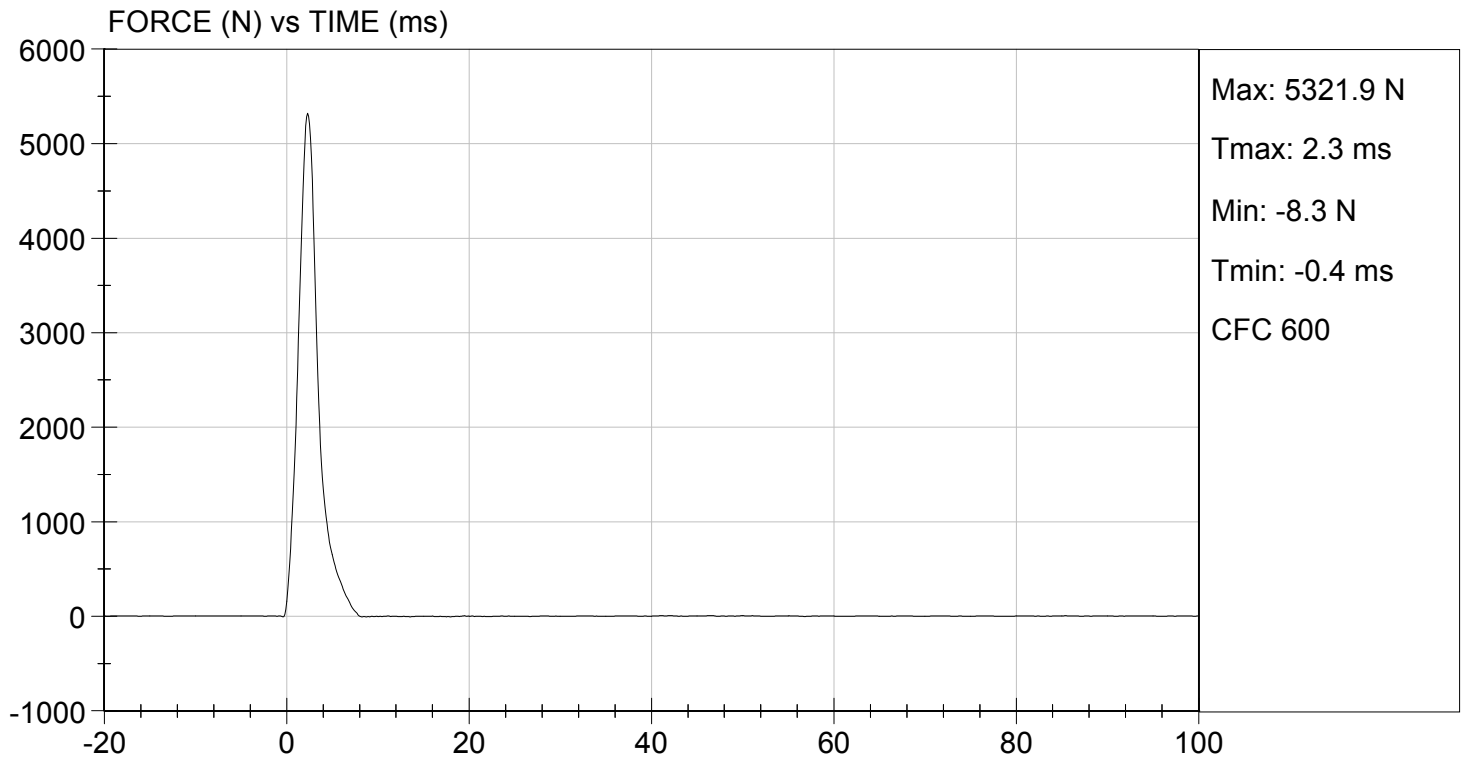

MGA RESEARCH CORPORATION
LEFT KNEE IMPACT TEST
HYBRID III 50TH PERCENTILE MALE

ATD Serial No: 351

Test I.D: D154046

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	2.07 to 2.13	2.11	Pass
Peak Probe Force	N	4715 to 5782	5,320	Pass
Overall Test Results				Pass

David Schoedel
 Laboratory Technician


12/07/2015
 Test Date

Jessica Hall
 Approved By



TEST DESC: LEFT KNEE
VELOCITY: 6.92 ft/s, 2.11 m/s

TEST DATE: 12/07/2015
TEST #: D154046

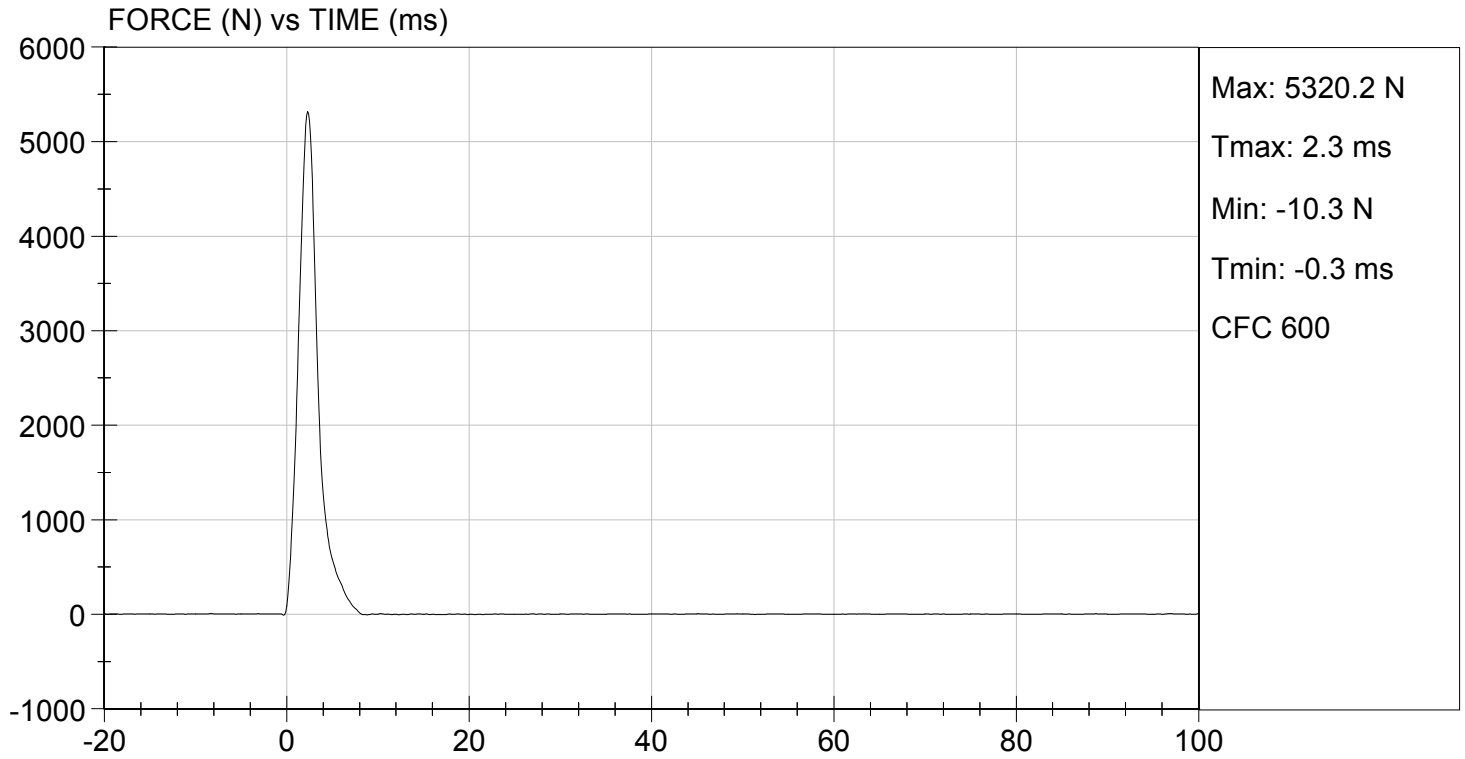

MGA RESEARCH CORPORATION
HIP-FEMUR FLEXION TEST
HYBRID III 50TH PERCENTILE MALE

ATD Serial No: 351


Test I.D: D154040


Tested Parameter	Units	Specification	Result		Pass/Fail
			Right	Left	
Laboratory Temperature	deg C	18.9 to 25.6	21.4	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	30	30	Pass
Rotation Rate	deg/s	5.0 to 10.0	6.1	6.2	Pass
30 Degrees	Nm	94.9 Nm Max	74.8	77.5	Pass
150 ft-lbf / 203.4 Nm	Deg	40.0 to 50.0 Degree Max Rotation	43.5	43.0	Pass
Overall Test Results					Pass

David Schoedel
 Laboratory Technician

12/07/2015
 Test Date

Jessica Hall
 Approved By

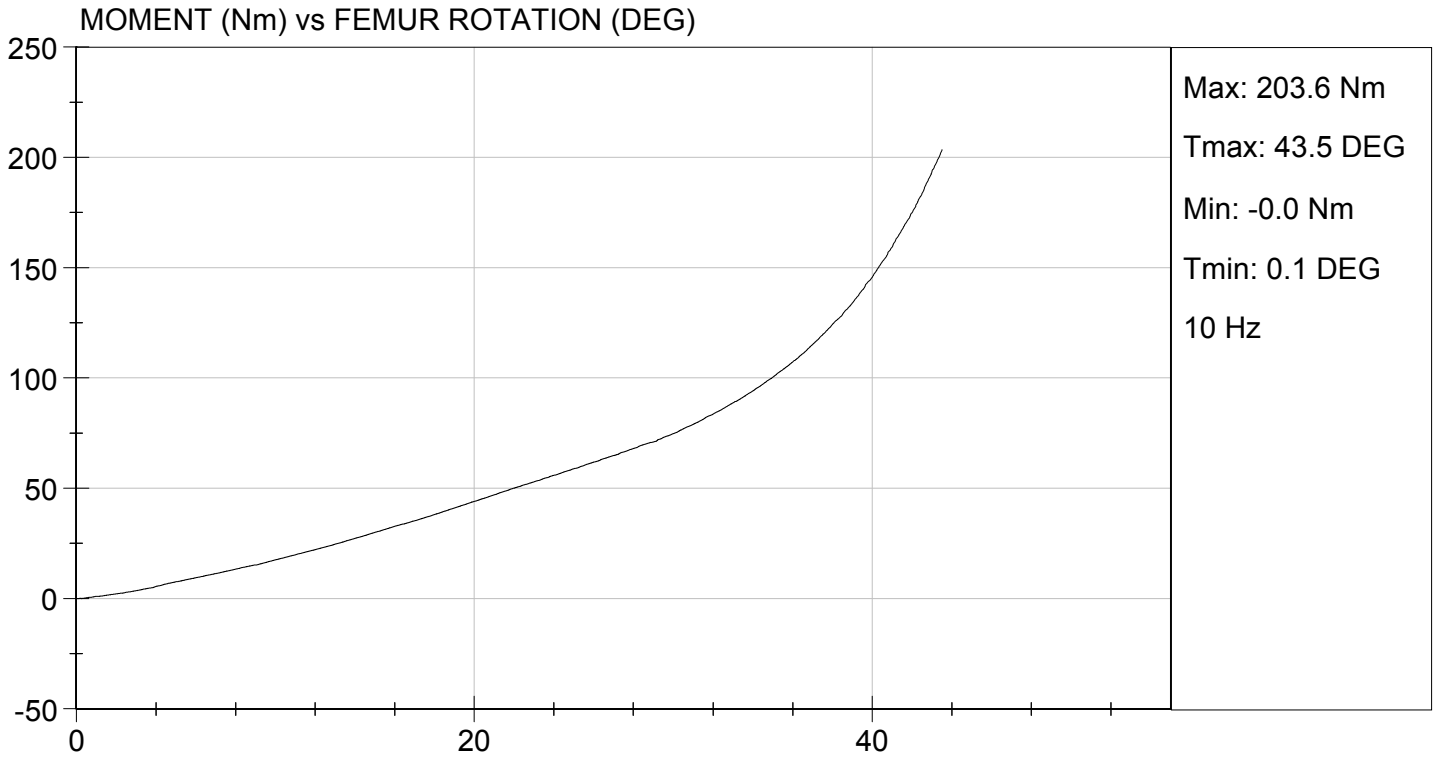

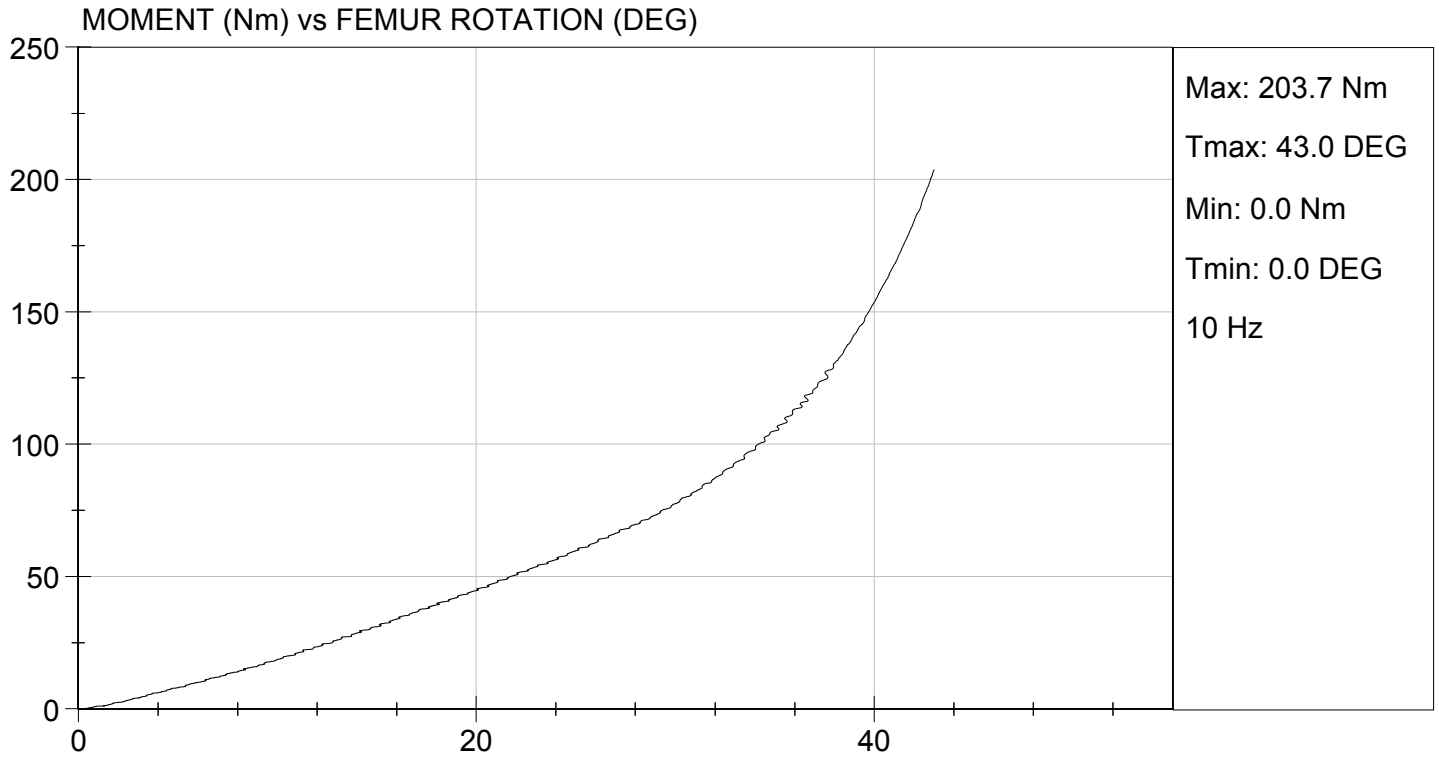

MGA RESEARCH CORPORATION
HEAD DROP TEST
HYBRID III 50TH PERCENTILE MALE

ATD Serial No: 351



Test ID: D16021



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	18	Pass
Peak Resultant Acceleration	G's	225 to 275	265	Pass
Peak Lateral Acceleration	G's	<= +/- 15.0	2.0	Pass
Unimodal	N/A	Yes	Yes	Pass
Oscillations	N/A	within 10% of peak	Yes	Pass
Overall Test Results				Pass

David Schoedel
 Laboratory Technician

01/05/2016
 Test Date

Jessica Hall
 Approved By

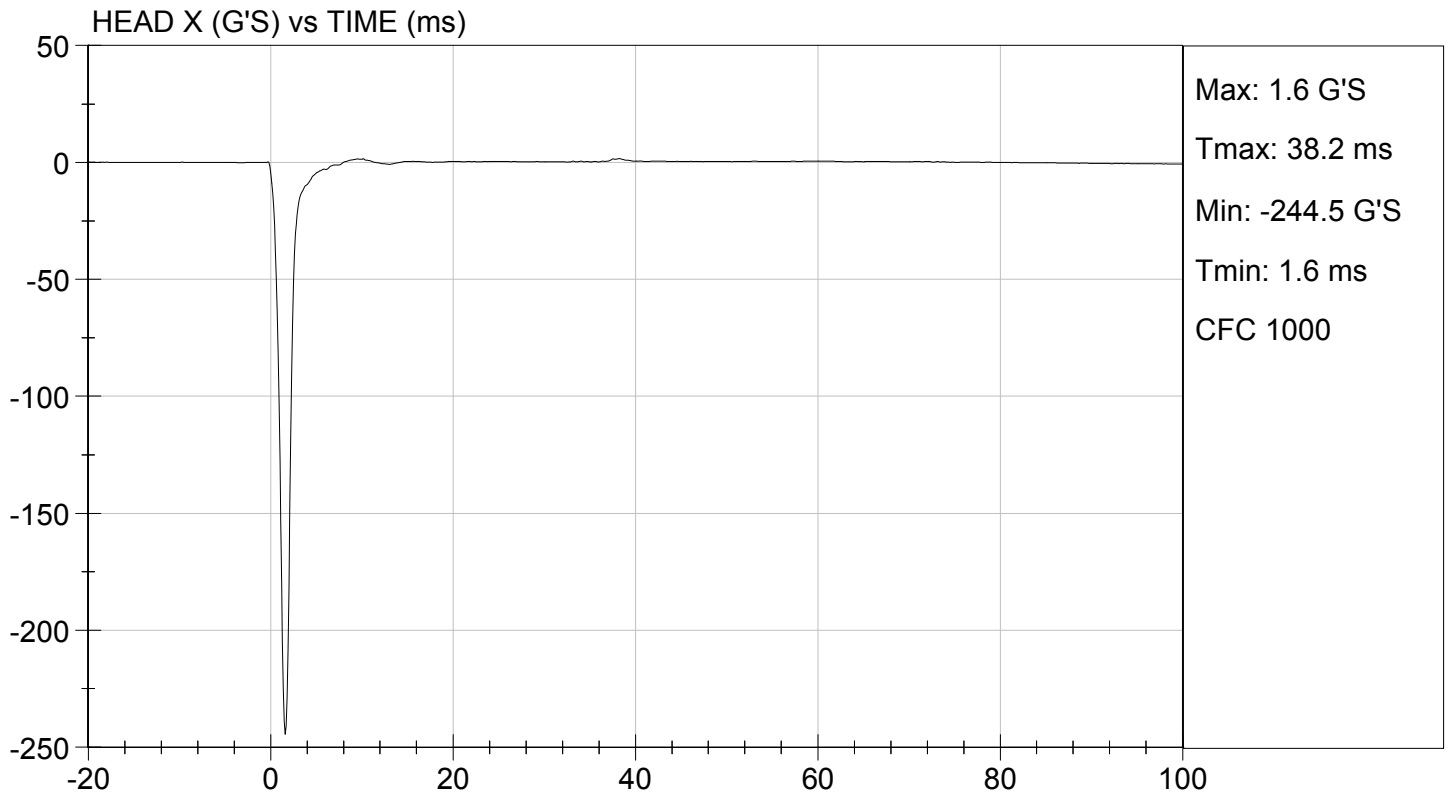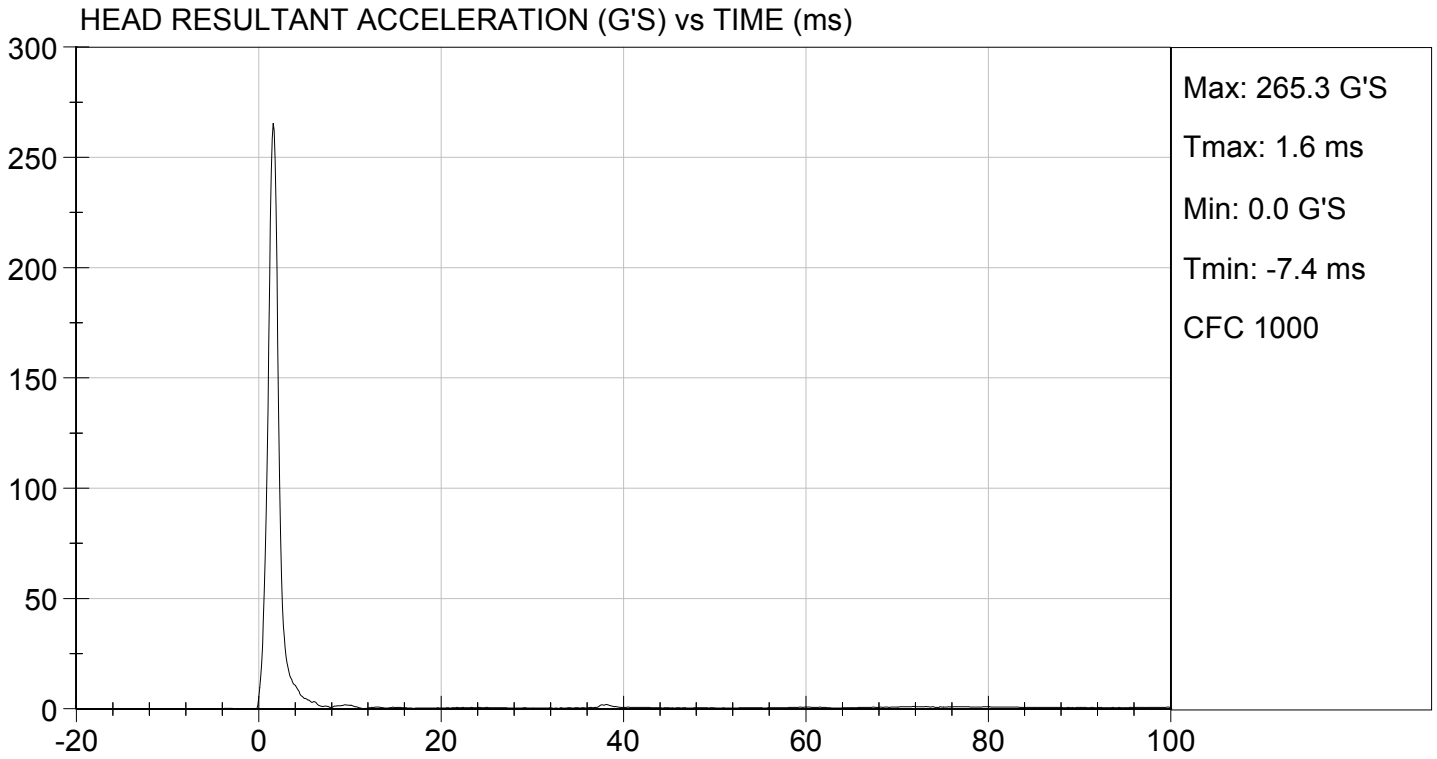

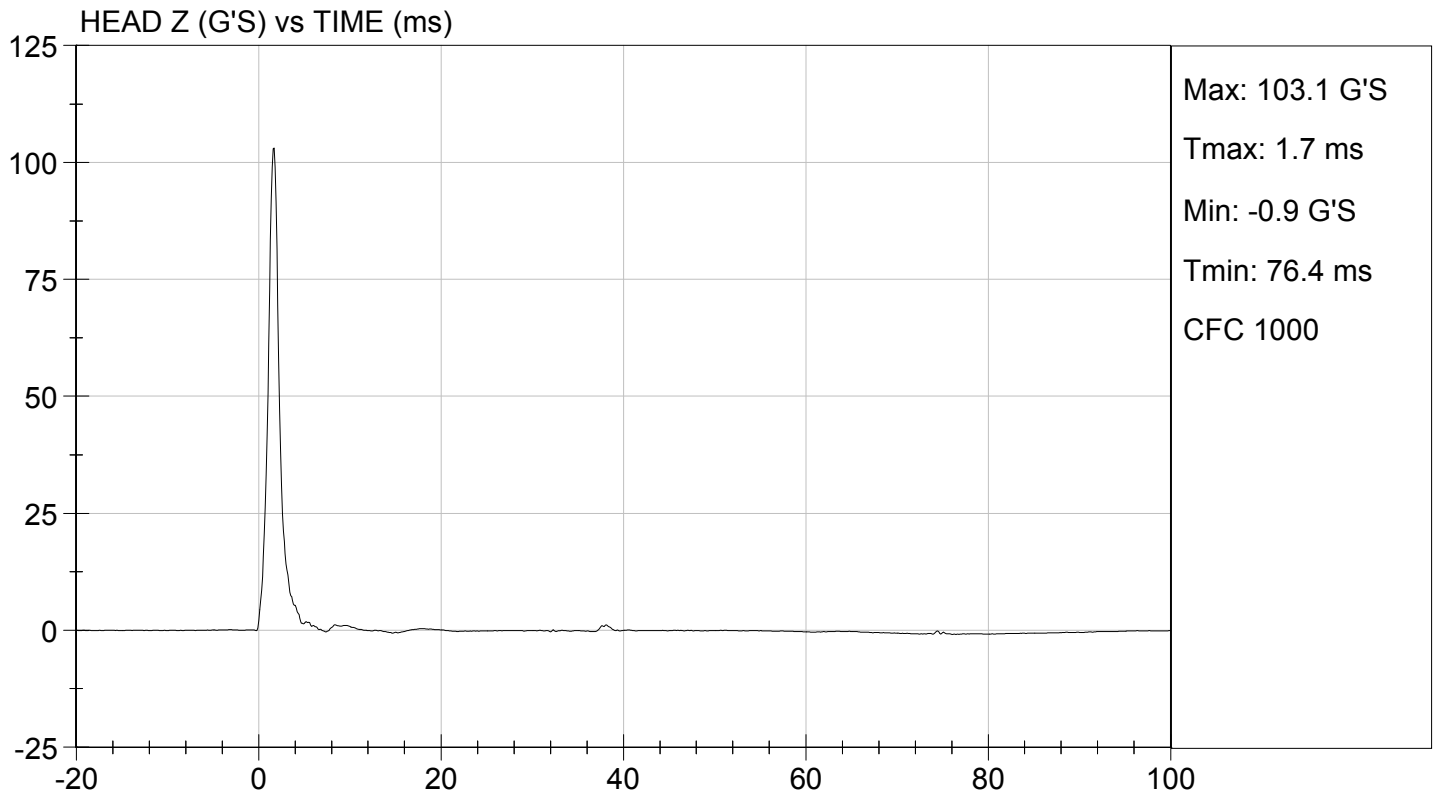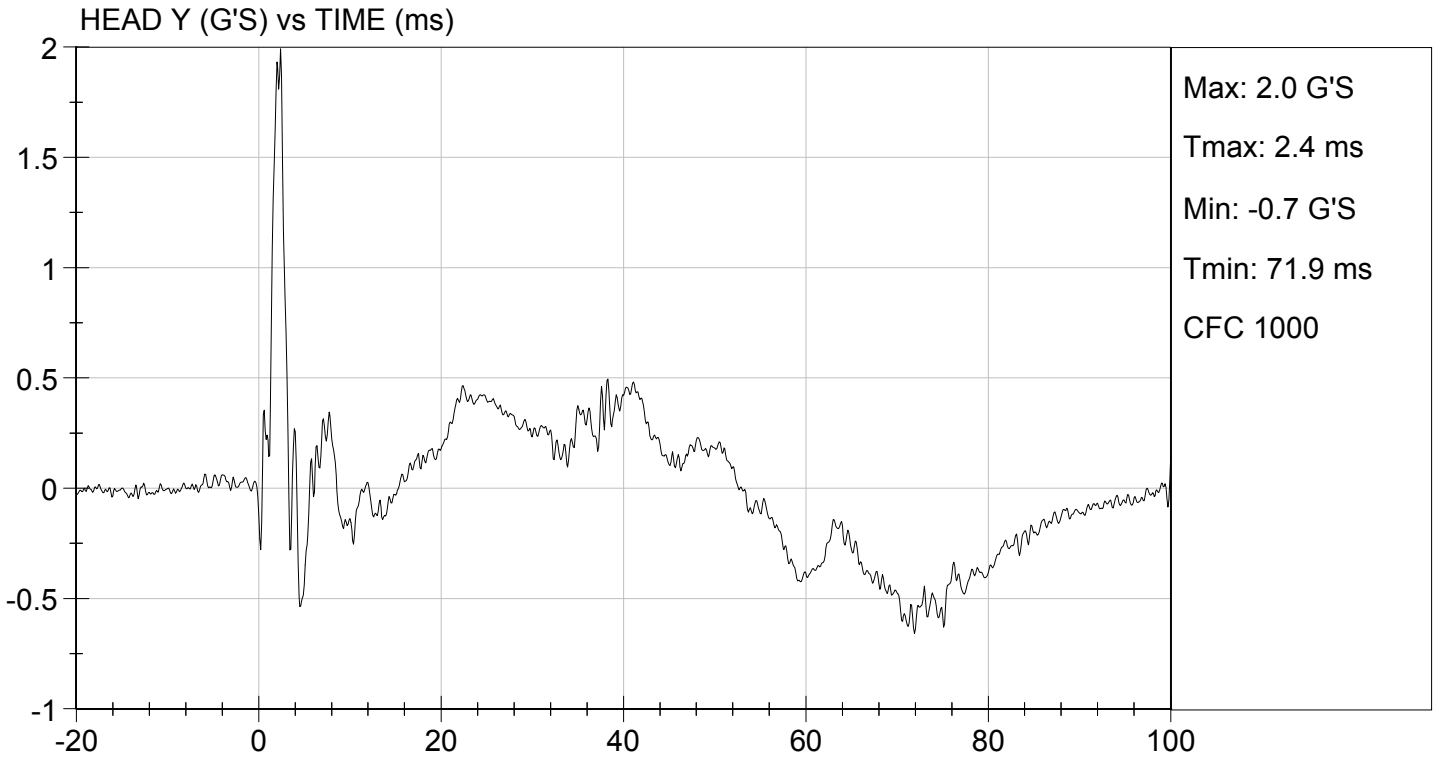

MGA RESEARCH CORPORATION
NECK FLEXION TEST
HYBRID III 50TH PERCENTILE MALE

ATD Serial No: 351

Test I.D: D16022

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.4	Pass
Laboratory Relative Humidity		%	10 to 70	20	Pass
Pendulum Velocity		m/s	6.89 to 7.13	7.06	Pass
Pendulum Deceleration	10 ms	G's	22.50 to 27.50	22.92	Pass
	20 ms	G's	17.60 to 22.60	20.28	Pass
	30 ms	G's	12.50 to 18.50	12.95	Pass
Peak Pendulum Deceleration After 30 ms		G's	<= 29.0	13.0	Pass
Deceleration Decay Time to Cross 5 G's		ms	34.0 to 42.0	40.4	Pass
Maximum "D" Plane Rotation	Maximum	Deg	64.0 to 78.0	69.7	Pass
	Time	ms	57.0 to 64.0	58.1	Pass
"D" Plane Rotation Decay Time To Zero Crossing		ms	113.0 to 128.0	117.4	Pass
Moment About Occipital Condyle	Maximum	Nm	88.1 to 108.5	89.5	Pass
	Time	ms	47.0 to 58.0	53.3	Pass
Positive Moment Decay Time To Zero Crossing		ms	97.0 to 107.0	102.9	Pass
Overall Test Results					Pass

David Schoedel



Laboratory Technician


01/05/2016

Test Date

Jessica Hall

Approved By

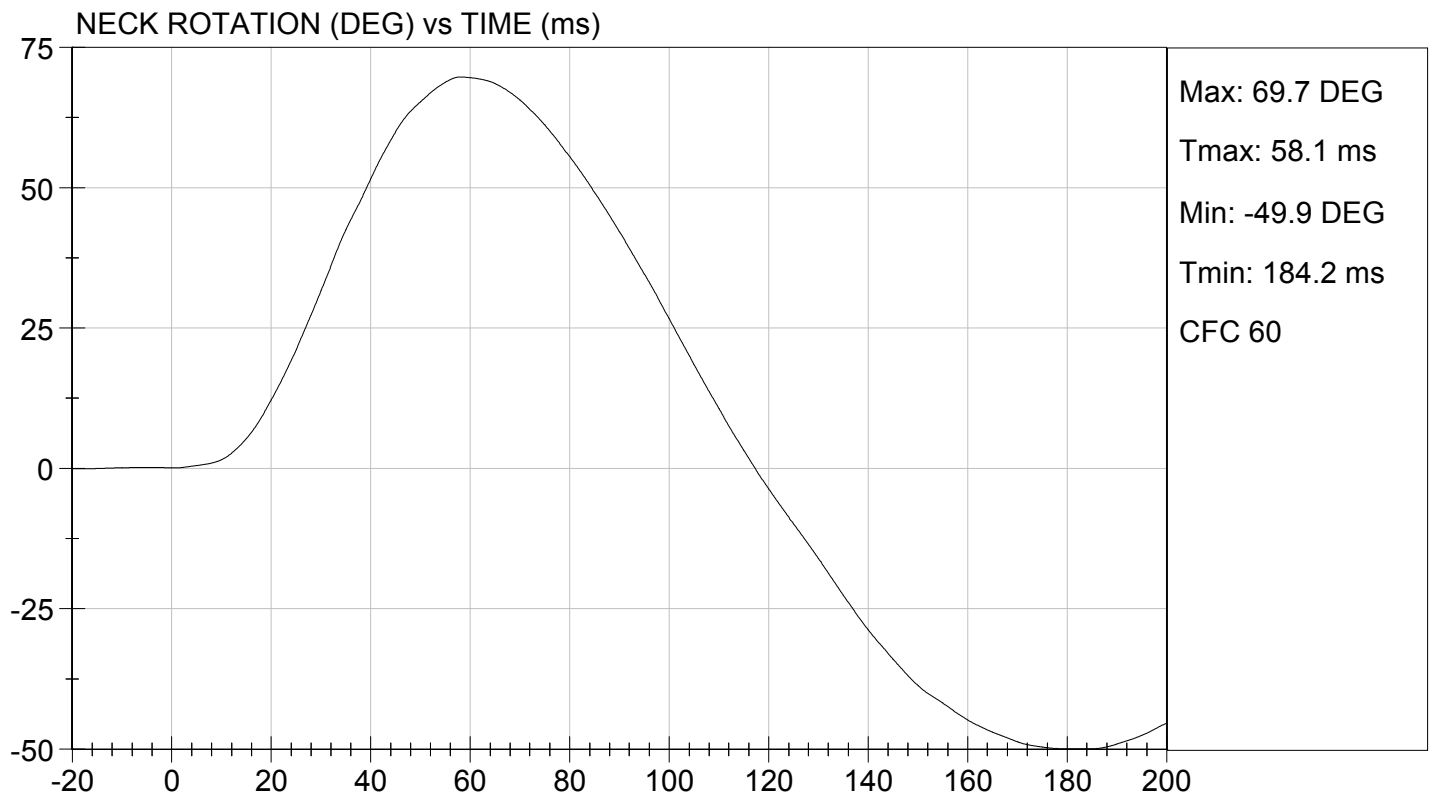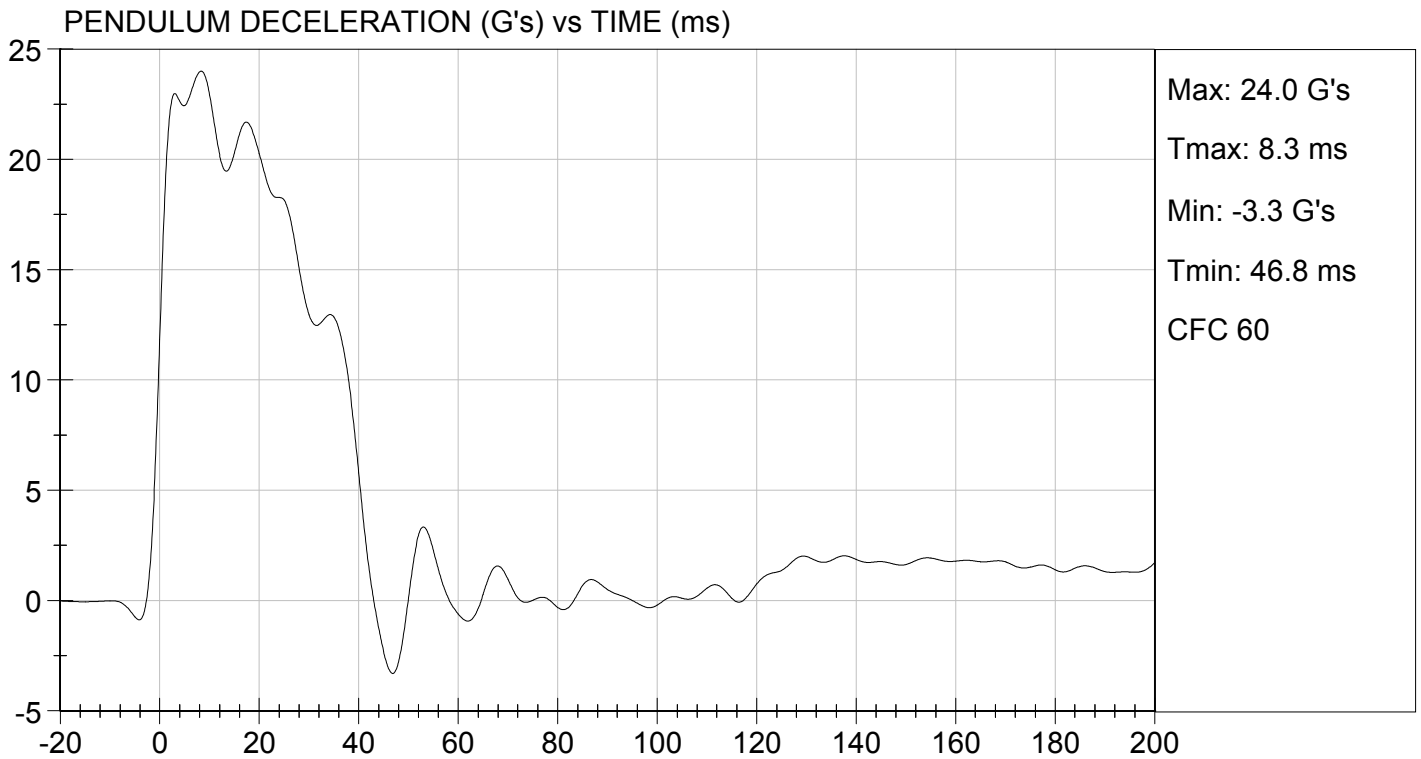

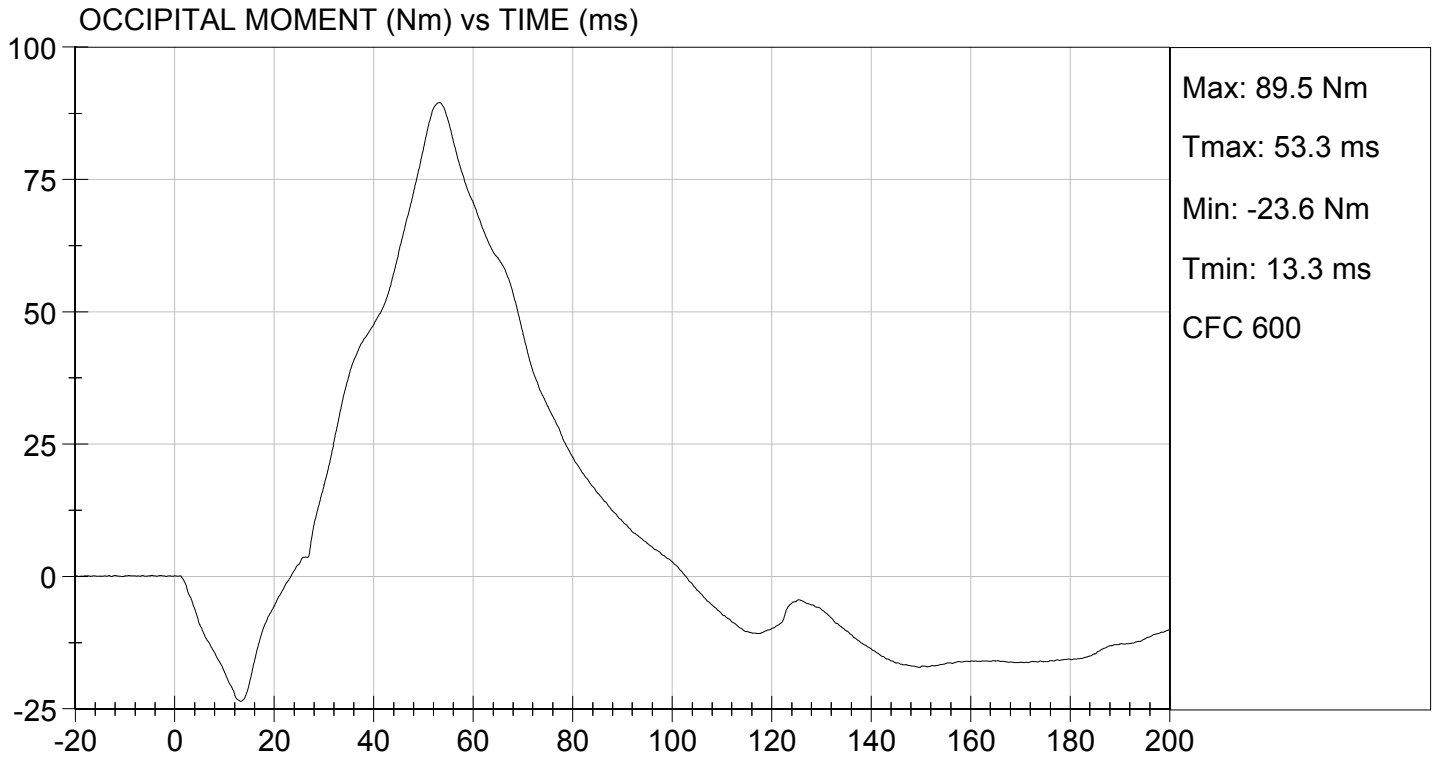

MGA RESEARCH CORPORATION
NECK EXTENSION TEST
HYBRID III 50TH PERCENTILE MALE

ATD Serial No: 351



Test I.D: D16023


Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.4	Pass
Laboratory Relative Humidity		%	10 to 70	20	Pass
Pendulum Velocity		m/s	5.95 to 6.19	6.12	Pass
Pendulum Deceleration	10 ms	G's	17.20 to 21.20	18.69	Pass
	20 ms	G's	14.00 to 19.00	16.68	Pass
	30 ms	G's	11.00 to 16.00	12.76	Pass
Peak Pendulum Deceleration After 30 ms		G's	<= 22.0	13.2	Pass
Deceleration Decay Time to Cross 5 G's		ms	38.0 to 46.0	41.2	Pass
Maximum "D" Plane Rotation	Maximum	Degrees	81.0 to 106.0	101.7	Pass
	Time	ms	72.0 to 82.0	79.3	Pass
"D" Plane Rotation Decay Time To Zero Crossing		ms	147.0 to 174.0	166.2	Pass
Moment About Occipital Condyle	Maximum	Nm	-52.9 to -79.9	-58.9	Pass
	Time	ms	65.0 to 79.0	72.8	Pass
Negative Moment Decay Time To Zero Crossing		ms	120.0 to 148.0	147.6	Pass
Overall Test Results					Pass

David Schoedel
Laboratory Technician

01/05/2016
Test Date

Jessica Hall
Approved By

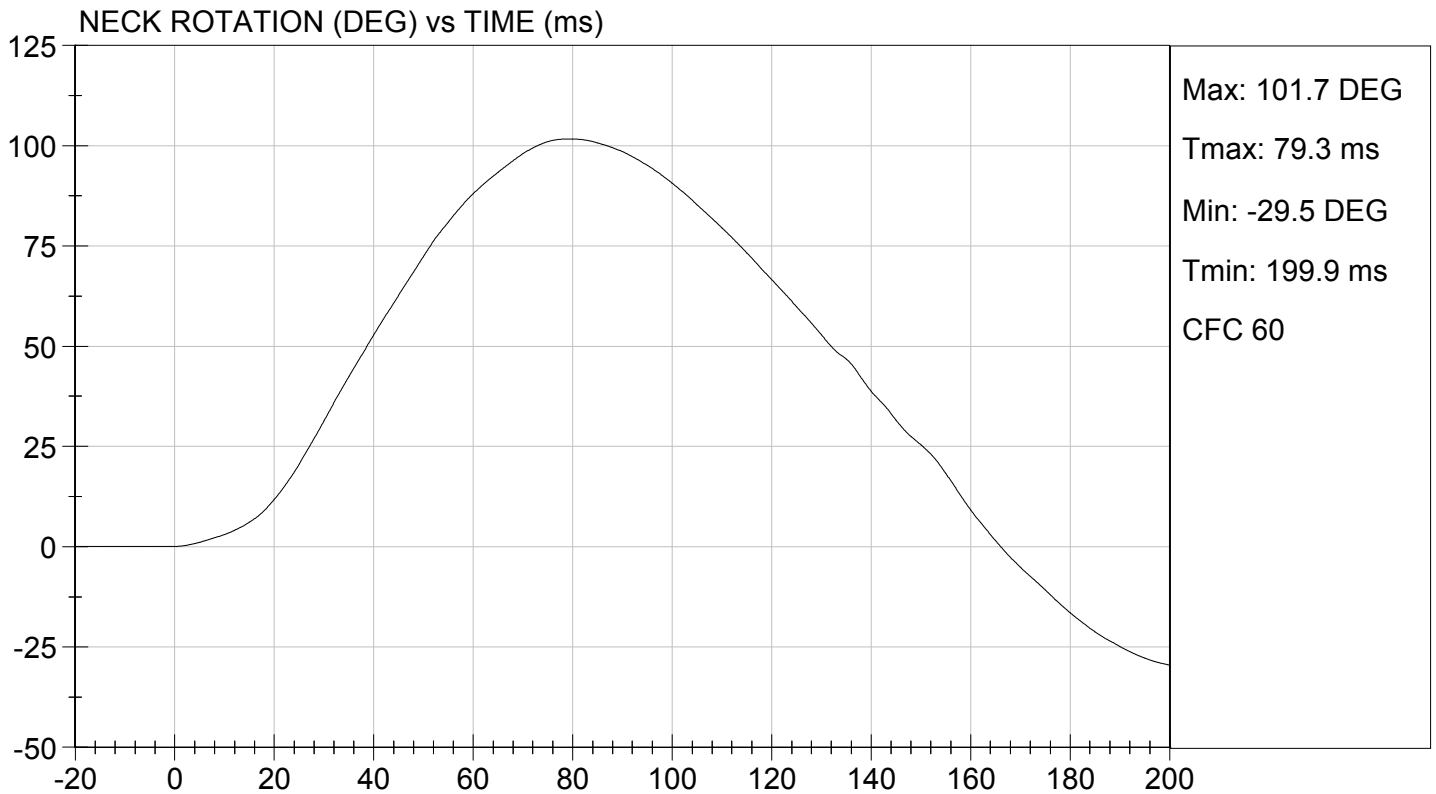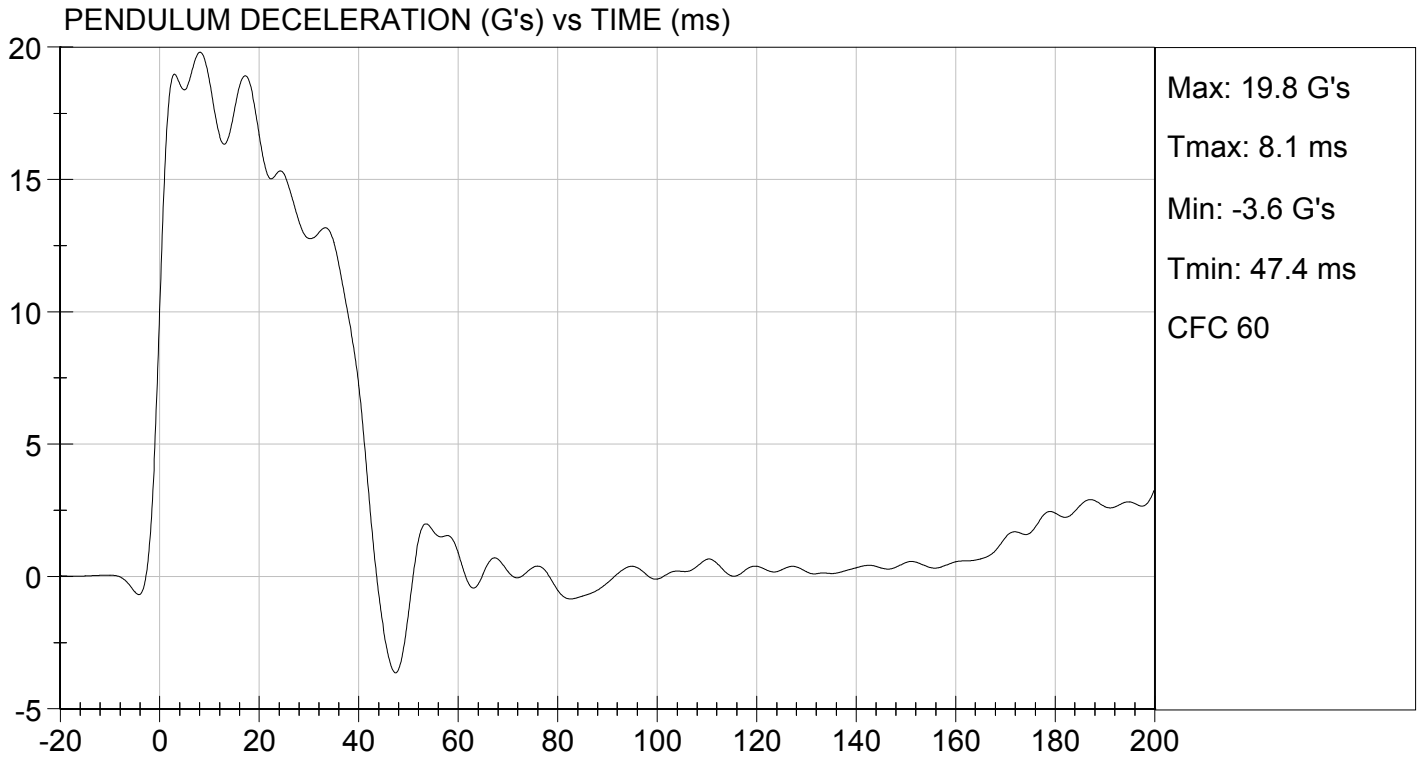

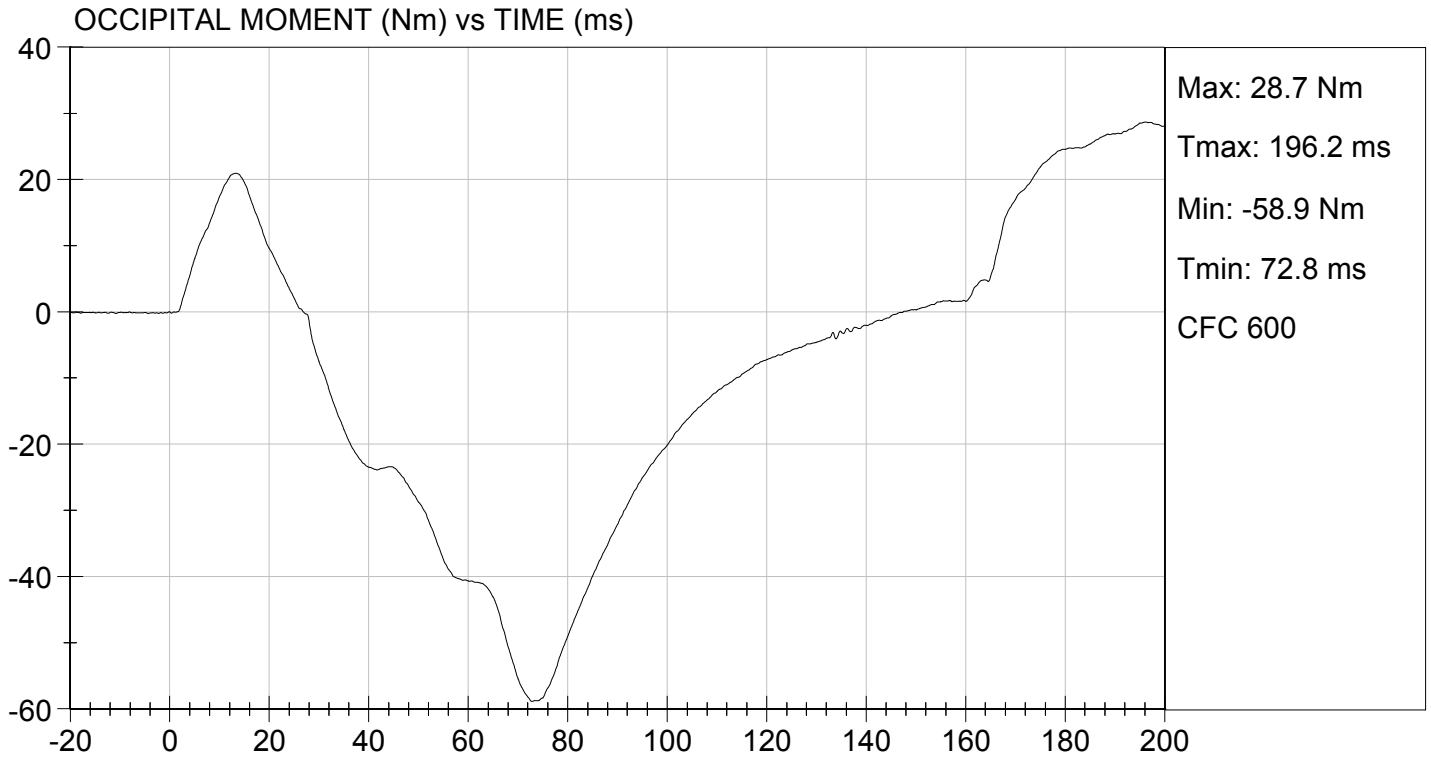

**MGA RESEARCH CORPORATION
THORAX IMPACT
HYBRID III 50TH PERCENTILE MALE**

ATD Serial No: 351

Test I.D.: D16024

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	17	Pass
Probe Velocity	m/s	6.58 to 6.82	6.77	Pass
Peak Probe Force	N	5159 to 5893	5,495	Pass
Peak Sternum Displacement	cm	6.35 to 7.26	7.22	Pass
Internal Hysteresis	%	69 to 85	72	Pass
Overall Test Results				Pass

David Schoedel


Laboratory Technician

01/06/2016

Test Date

Jessica Hall

Approved By

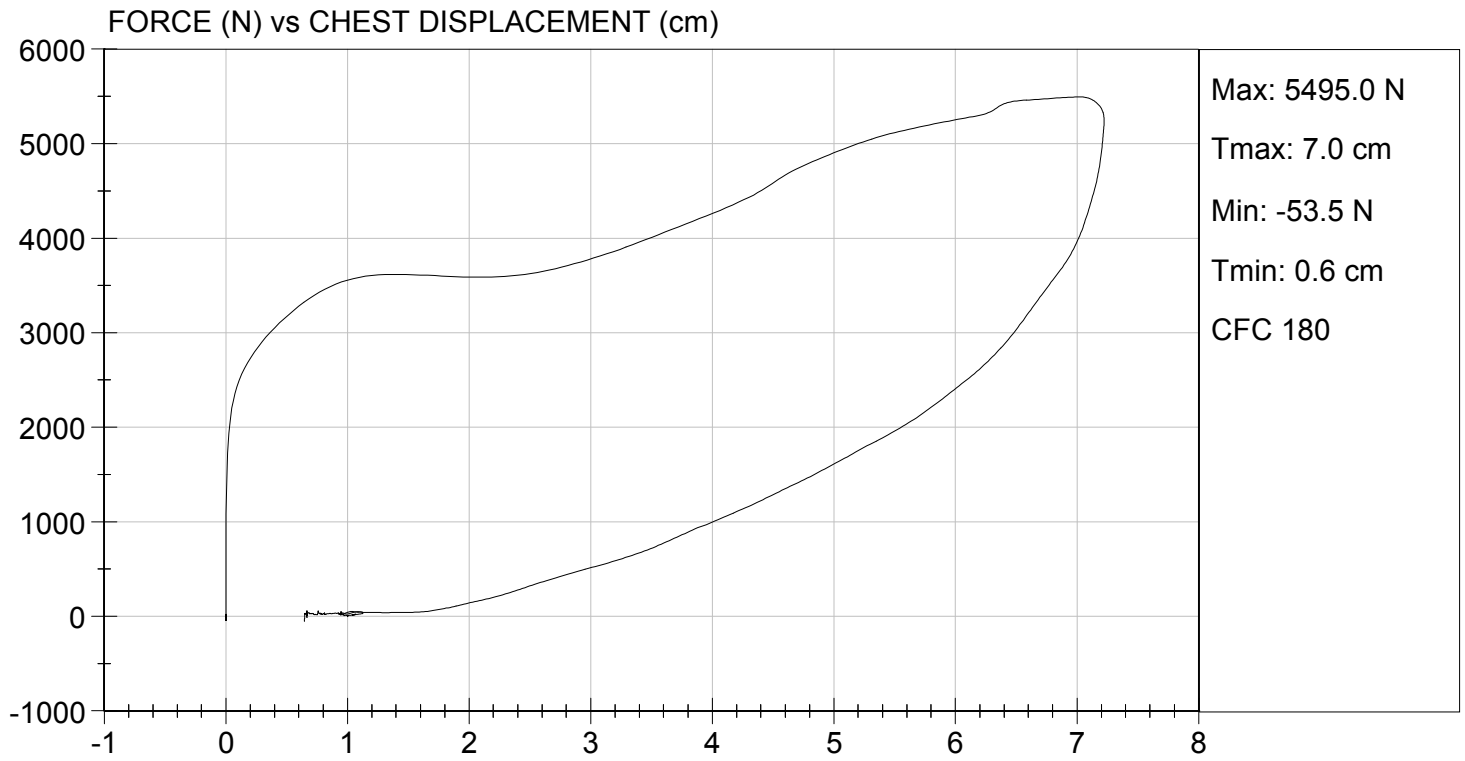

MGA RESEARCH CORPORATION
RIGHT KNEE IMPACT TEST
HYBRID III 50TH PERCENTILE MALE

ATD Serial No: 351

Test I.D: D16025

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.5	Pass
Laboratory Relative Humidity	%	10 to 70	16	Pass
Probe Velocity	m/s	2.07 to 2.13	2.12	Pass
Peak Probe Force	N	4715 to 5782	4,783	Pass
Overall Test Results				Pass

David Schoedel

Laboratory Technician

01/05/2016

Test Date


Jessica Hall

Approved By



TEST DESC: RIGHT KNEE
VELOCITY: 6.97 ft/s, 2.12 m/s

TEST DATE: 01/05/2016
TEST #: D16025

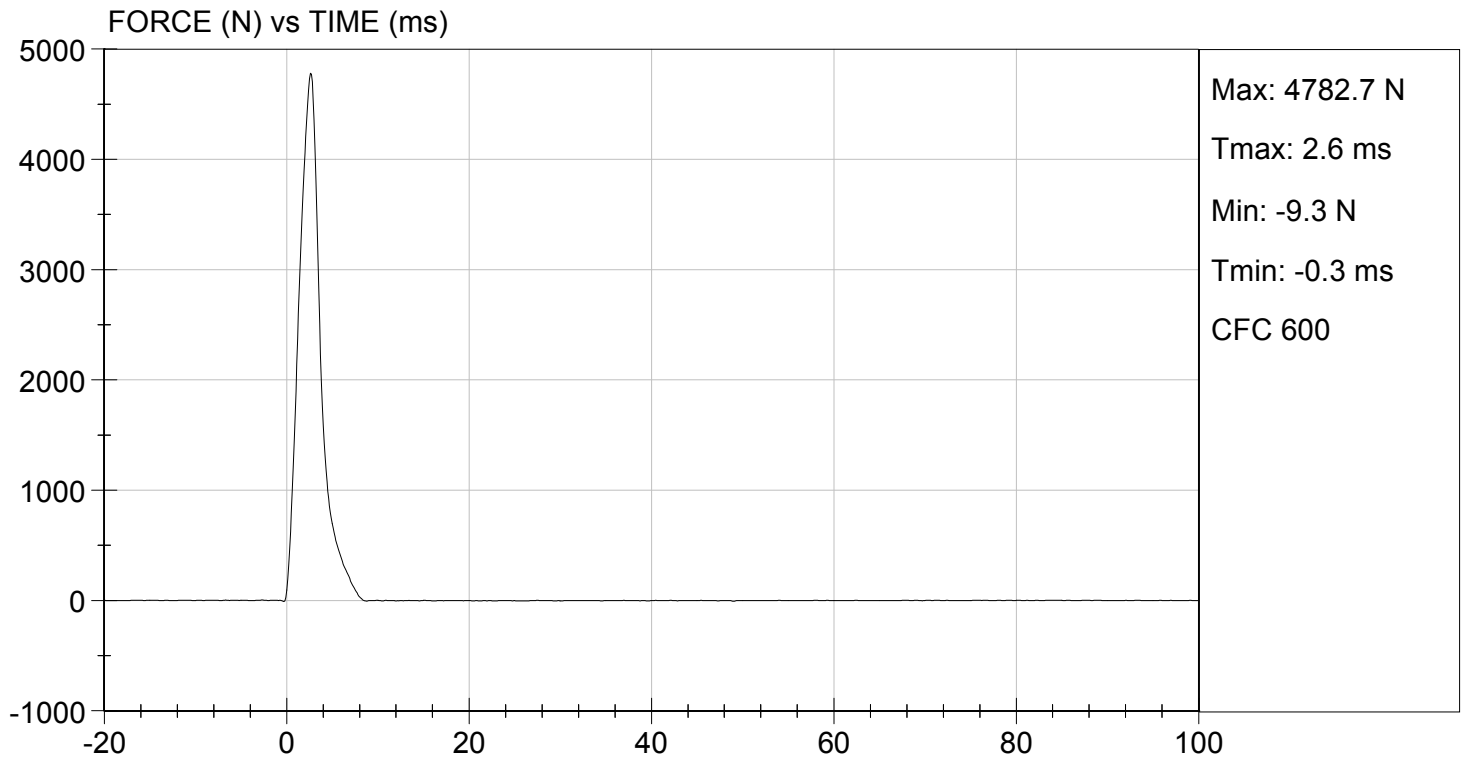

MGA RESEARCH CORPORATION
LEFT KNEE IMPACT TEST
HYBRID III 50TH PERCENTILE MALE

ATD Serial No: 351

Test I.D: D16026

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.5	Pass
Laboratory Relative Humidity	%	10 to 70	16	Pass
Probe Velocity	m/s	2.07 to 2.13	2.12	Pass
Peak Probe Force	N	4715 to 5782	4,973	Pass
Overall Test Results				Pass

David Schoedel
 Laboratory Technician


01/05/2016
 Test Date

Jessica Hall
 Approved By



TEST DESC: LEFT KNEE
VELOCITY: 6.97 ft/s, 2.12 m/s

TEST DATE: 01/05/2016
TEST #: D16026

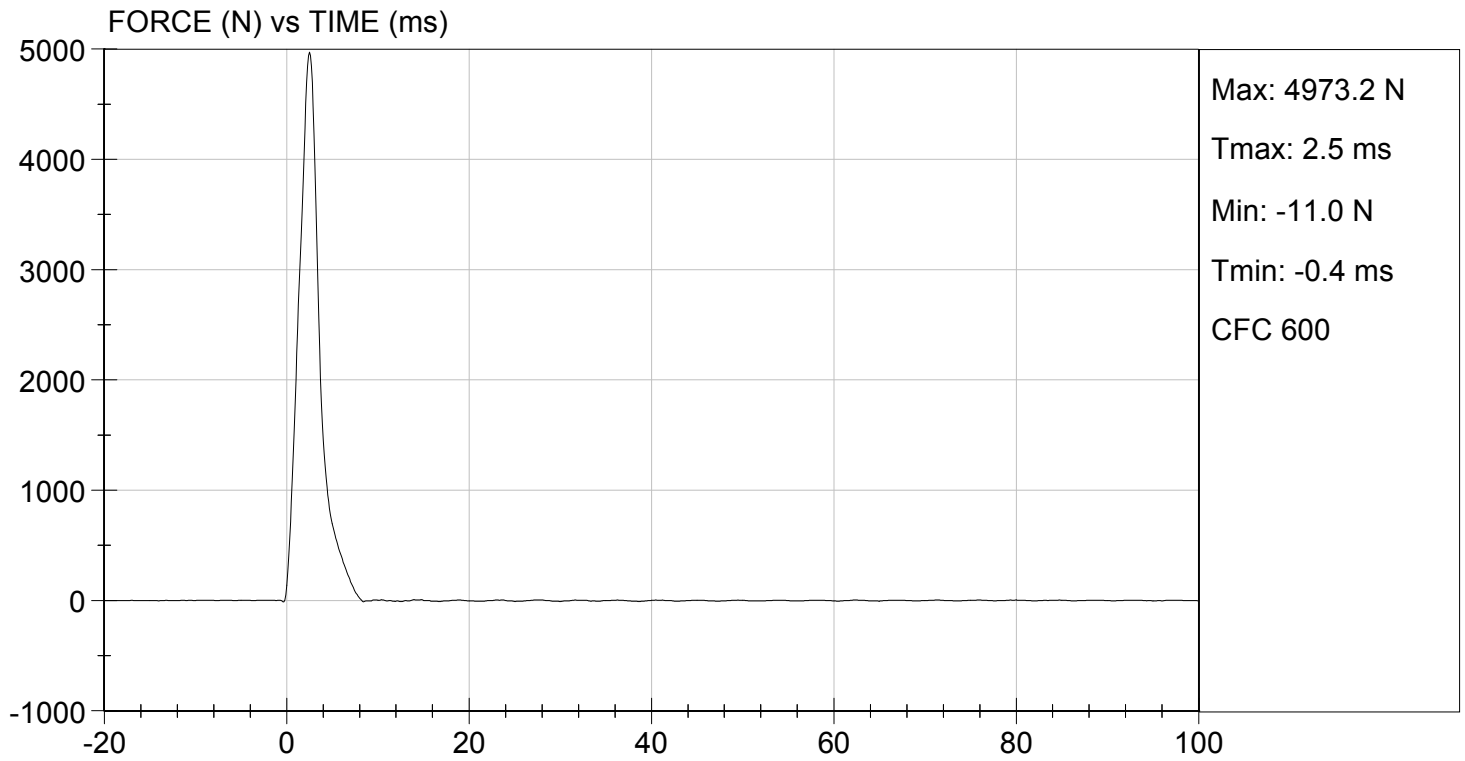

MGA RESEARCH CORPORATION
HIP-FEMUR FLEXION TEST
HYBRID III 50TH PERCENTILE MALE

ATD Serial No: 351


Test I.D: D16020


Tested Parameter	Units	Specification	Result		Pass/Fail
			Right	Left	
Laboratory Temperature	deg C	18.9 to 25.6	21.4	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	18	18	Pass
Rotation Rate	deg/s	5.0 to 10.0	6.2	6.3	Pass
30 Degrees	Nm	94.9 Nm Max	71.1	76.8	Pass
150 ft-lbf / 203.4 Nm	Deg	40.0 to 50.0 Degree Max Rotation	44.3	43.7	Pass
Overall Test Results					Pass

David Schoedel
 Laboratory Technician

01/05/2016
 Test Date

Jessica Hall
 Approved By

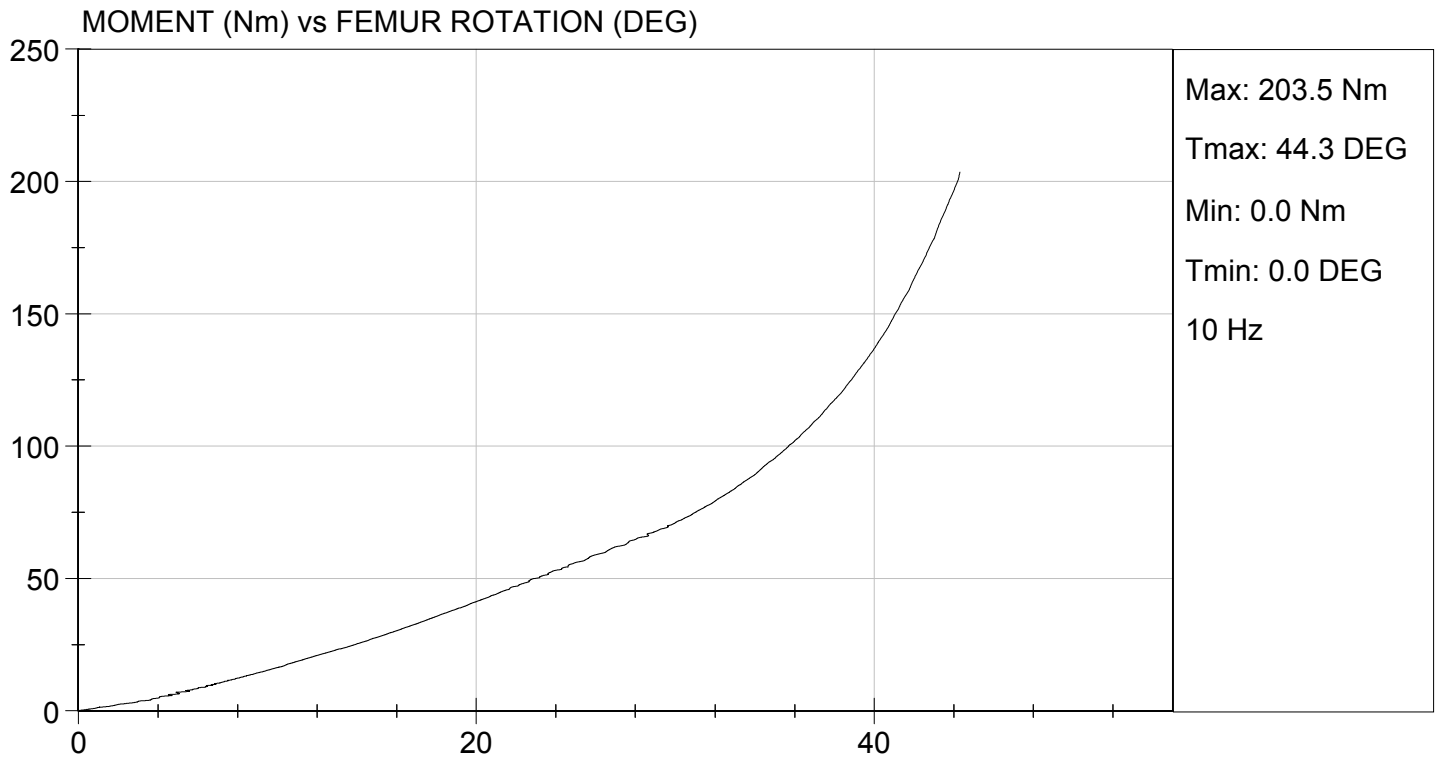

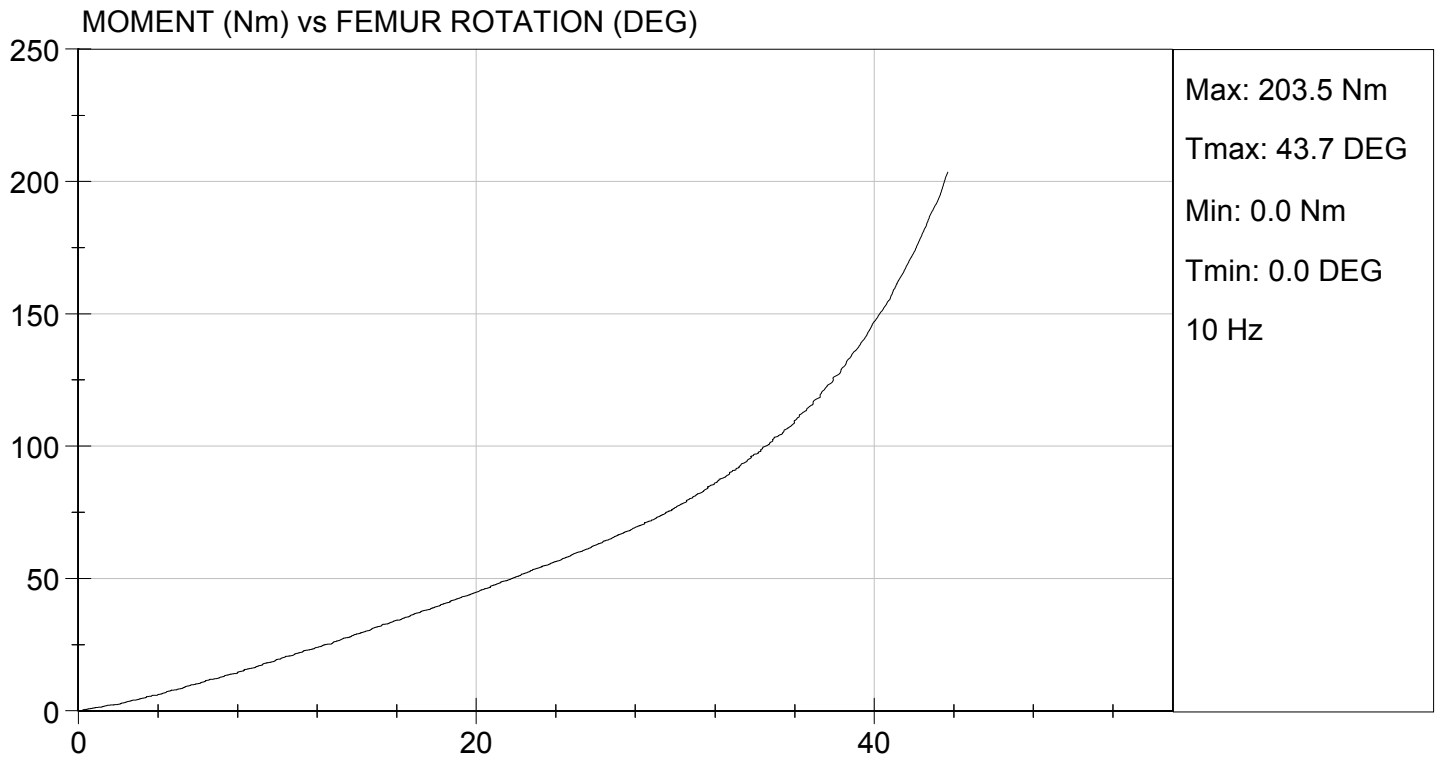

**Hybrid III, 5th External Measurements
SN: 634**

HYBRID III, PART 572, SUBPART O EXTERNAL DIMENSIONS				
DIMENSION	DESCRIPTION	DETAILS	ASSEMBLY DIMENSION (mm)	ACTUAL MEASUREMENT
A	TOTAL SITTING HEIGHT	Seat surface to highest point on top of the head.	774.7-800.1	784.6
B	SHOULDER PIVOT HEIGHT	Centerline of shoulder pivot bolt to the seat surface.	431.8-457.2	449.0
C	H-POINT HEIGHT	Reference	81.3-86.3	85.0
D	H-POINT LOCATION FROM BACKLINE	Reference	144.8-149.8	145.0
E	SHOULDER PIVOT FROM BACKLINE	Center of the shoulder clevis to the rear vertical surface of the fixture.	68.6-83.8	79.2
F	THIGH CLEARANCE	Measured at the highest point on the upper femur segment.	119.4-134.6	125.6
G	BACK OF ELBOW TO WRIST PIVOT	back of the elbow flesh to the wrist pivot in line with the elbow and wrist pivots	243.9-259.1	253.4
H	HEAD BACK TO BACKLINE	Back of Skull cap skin to seat rear vertical surface (Reference)	43.2-48.2	45.0
I	SHOULDER TO- ELBOW LENGTH	Measure from the highest point on top of the shoulder clevis to the lowest part of the flesh on the elbow in line with the elbow pivot bolt.	276.8-297.2	277.8
J	ELBOW REST HEIGHT	Measure from the flesh below the elbow pivot bolt to the seat surface.	182.8-203.2	197.5
K	BUTTOCK TO KNEE LENGTH	The forward most part of the knee flesh to the rear vertical surface of the fixture.	520.7-546.1	541.4
L	POPLITEAL HEIGHT	Seat surface to the plane of the horizontal plane of the bottom of the feet.	355.6-376.0	362.1
M	KNEE PIVOT HEIGHT	Centerline of knee pivot bolt to the horizontal plane of the bottom of the feet.	393.7-419.1	400.4
N	BUTTOCK POPLITEAL LENGTH	The rearmost surface of the lower leg to the same point on the rear surface of the buttocks used for dim. "K".	414-439.4	428.6

HYBRID III, SUBPART O EXTERNAL DIMENSIONS, continued				
DIMENSION	DESCRIPTION	DETAILS	ASSEMBLY DIMENSION (mm)	ACTUAL MEASUREMENT
O	CHEST DEPTH WITHOUT JACKET	Measured 304.8 ± 5.1 mm above seat surface	175.3-190.5	181.6
P	FOOT LENGTH	Tip of toe to rear of heel	218.5-233.7	224.7
Q	STANDING HEIGHT	(THEORETICAL)	1501.1	N/A
R	BUTTOCK TO KNEE PIVOT LENGTH	The rear surface of the buttocks to the knee pivot bolt	457.2-482.6	482.0
S	HEAD BREADTH	The widest part of the head	137.1-147.3	139.6
T	HEAD DEPTH	Back of the head to the forehead	177.8-188.0	179.2
U	HIP BREADTH	The widest part of the hip	299.7-314.9	306.1
V	SHOULDER BREADTH	Outside edges of right and left shoulder clevises	350.5-365.7	355.5
W	FOOT BREADTH	The widest part of the foot	78.8-94.0	90.0
X	HEAD CIRCUMFERENCE	Measured at the point as in dim. "T"	528.3-548.7	540.6
Y	CHEST CIRCUMFERENCE (WITH CHEST JACKET)	Measured 345.4 ± 12.7 mm above seat surface	850.9-881.3	868.7
Z	WAIST CIRCUMFERENCE	Measured 165.1 ± 5.1 mm above seat surface	759.5-789.9	786.8
AA	REFERENCE LOCATION FOR MEASUREMENT OF CHEST CIRCUMFERENCE	Reference	332.7-358.1	345.4
BB	REFERENCE LOCATION FOR MEASUREMENT OF WAIST CIRCUMFERENCE	Reference	160.1-170.2	165.1

**MGA RESEARCH CORPORATION
HEAD DROP TEST
HYBRID III 5TH PERCENTILE**

ATD Serial No: 634



Test ID: D154051



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Peak Resultant Acceleration	G's	250 to 300	282	Pass
Peak Lateral Acceleration	G's	<= +/- 15.0	3.2	Pass
Unimodal	N/A	Yes	Yes	Pass
Oscillations	N/A	within 10% of peak	Yes	Pass
Overall Test Results				Pass

David Schoedel
Laboratory Technician

12/07/2015
Test Date

Jessica Hall
Approved By

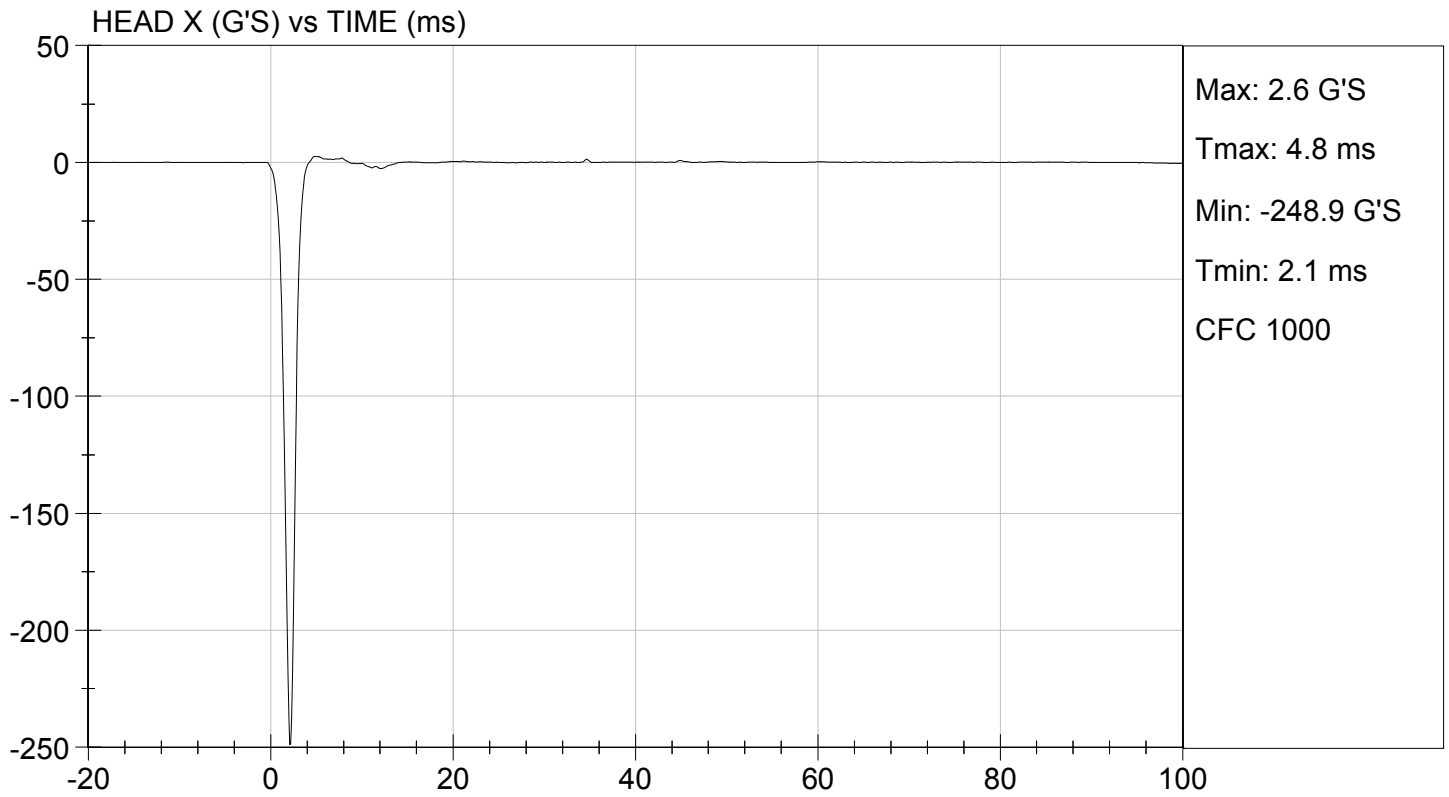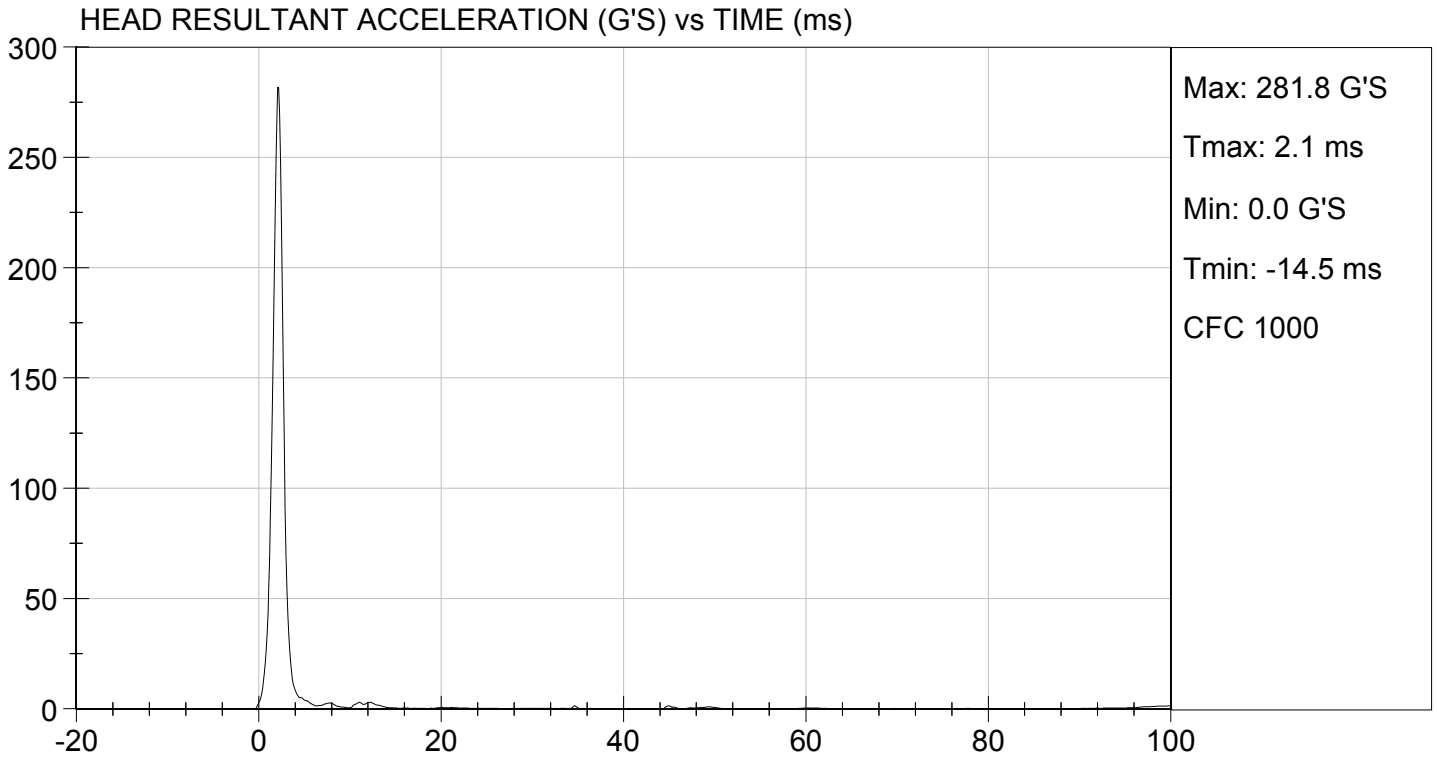

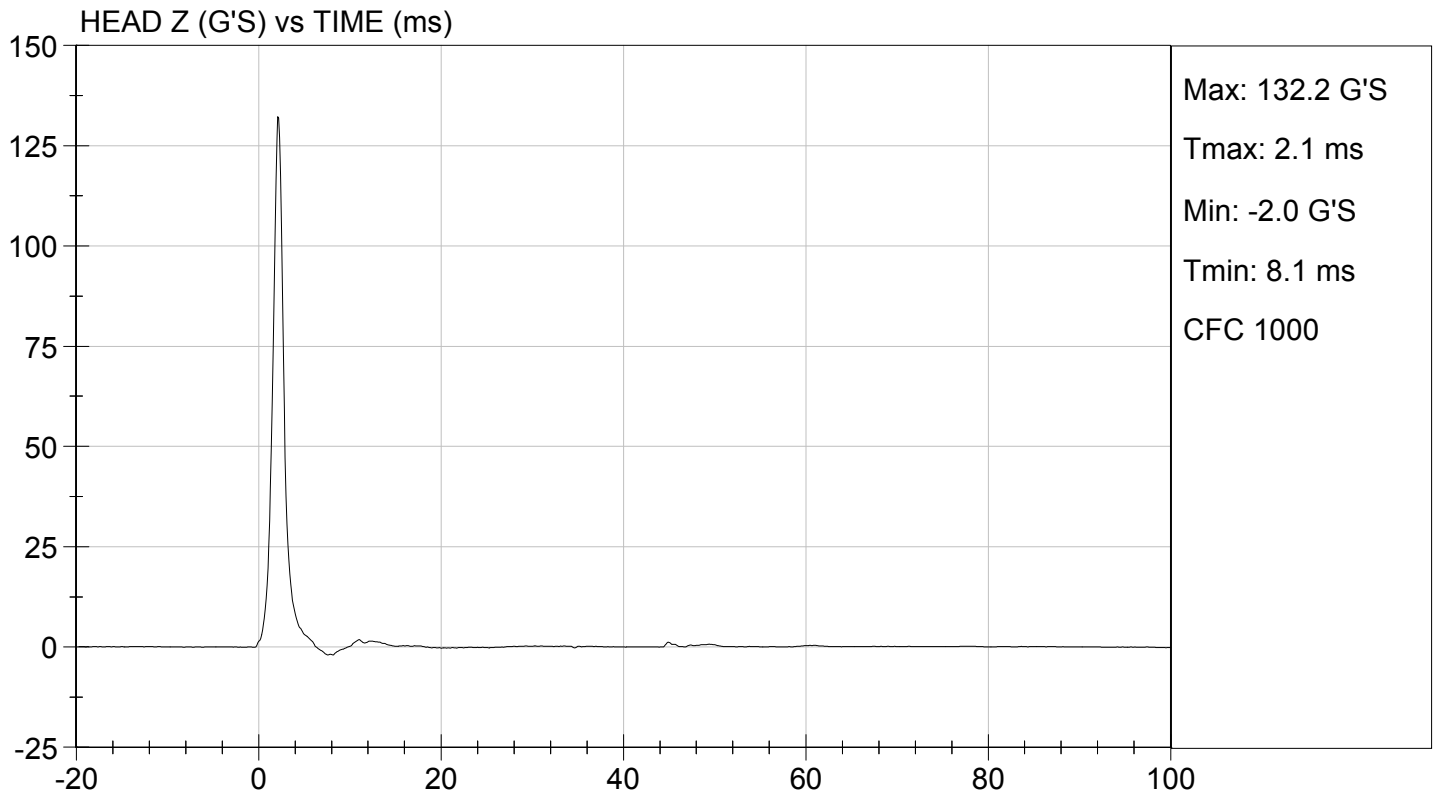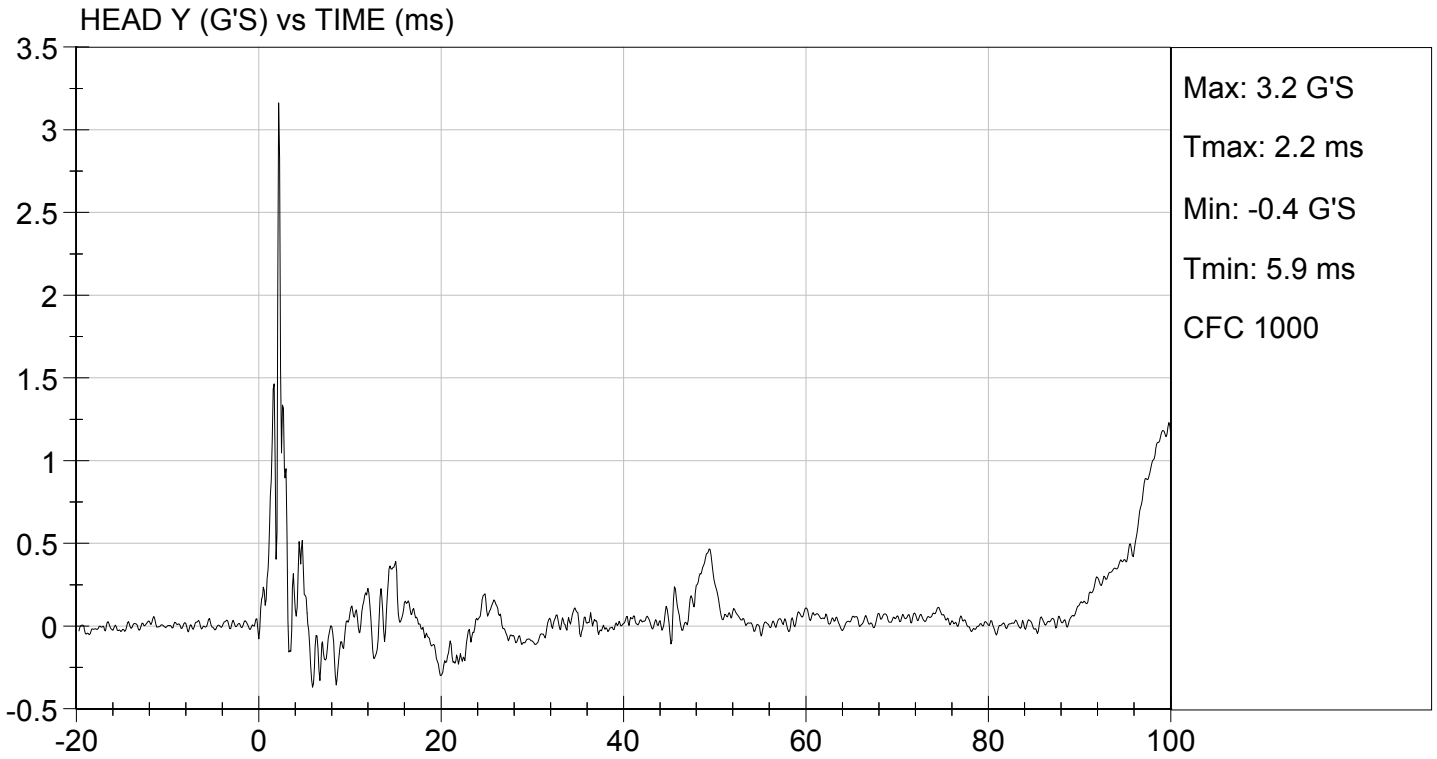

MGA RESEARCH CORPORATION

NECK FLEXION TEST

HYBRID III 5TH PERCENTILE

ATD Serial No: 634



Test I.D.: D154052


Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.0	Pass
Laboratory Relative Humidity		%	10 to 70	31	Pass
Pendulum Speed		m/s	6.89 to 7.13	7.06	Pass
Pendulum Velocity	10 ms	m/s	2.1 to 2.5	2.5	Pass
	20 ms	m/s	4.0 to 5.0	4.8	Pass
	30 ms	m/s	5.8 to 7.0	6.5	Pass
D Plane Rotation	Max	deg	77 to 91	80	Pass
Occipital Condyle Moment within Rotation Corridor		Nm	69 to 83	75	Pass
Positive Moment Time Curve Decay to 10 Nm		ms	80 to 100	83	Pass
Overall Results					Pass

Jack Coleman
Laboratory Technician

12/08/2015
Test Date

Jessica Hall
Approved By

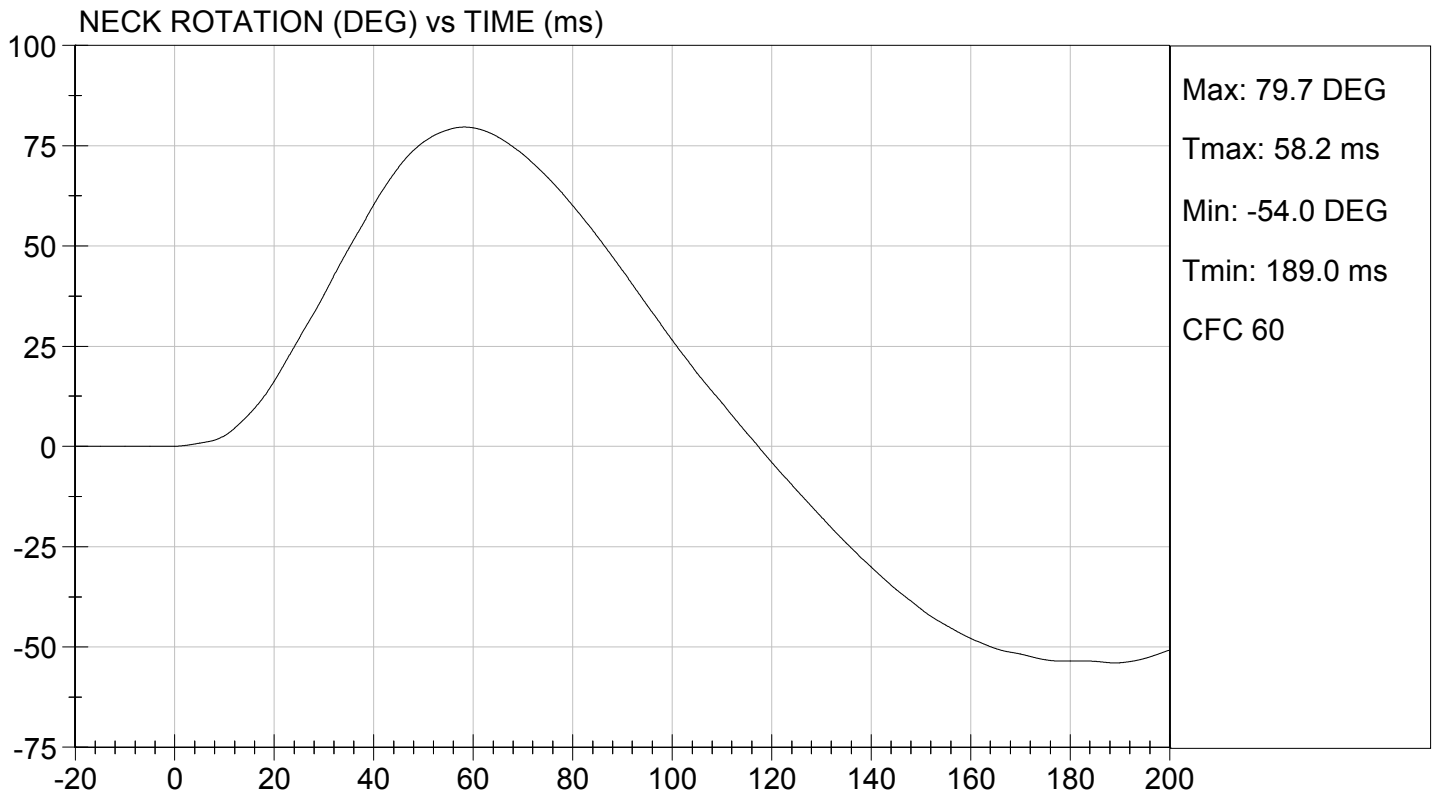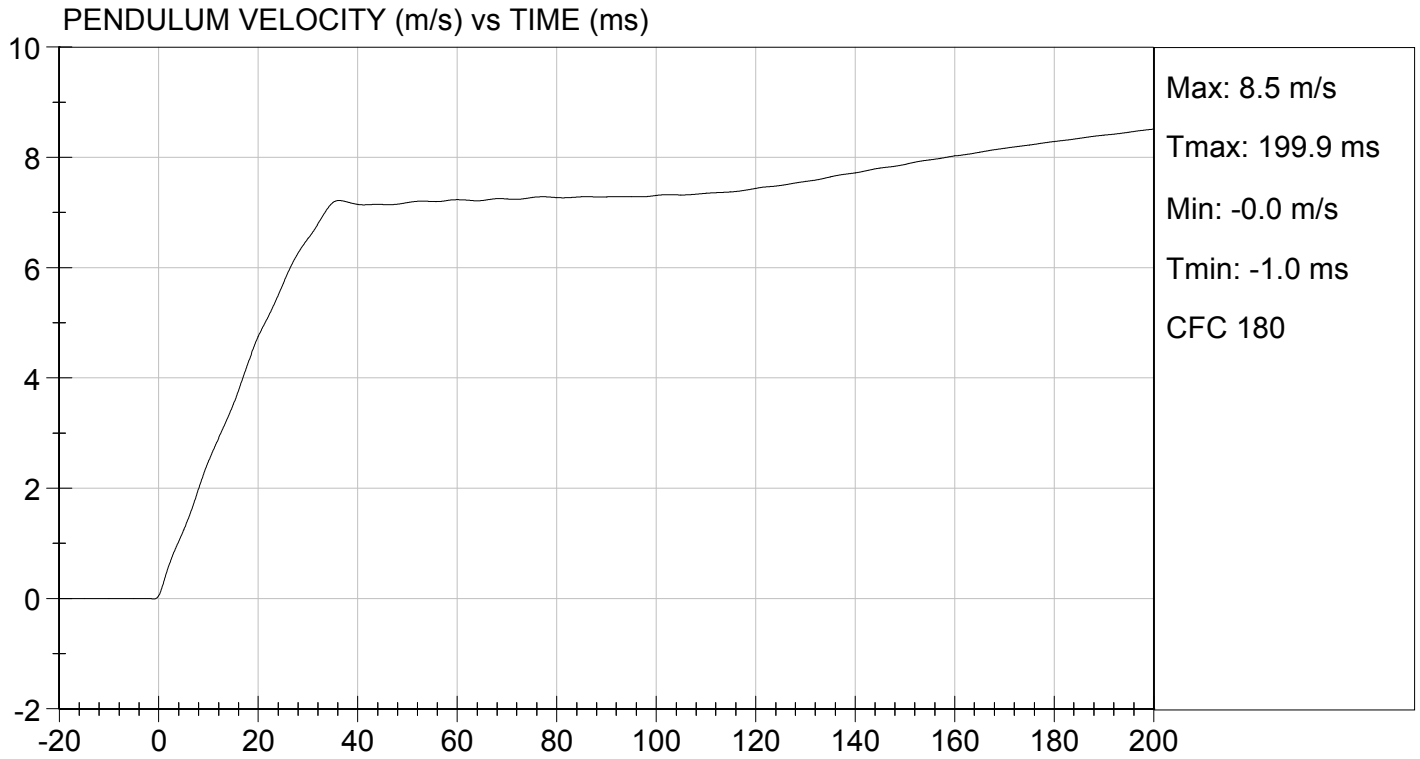

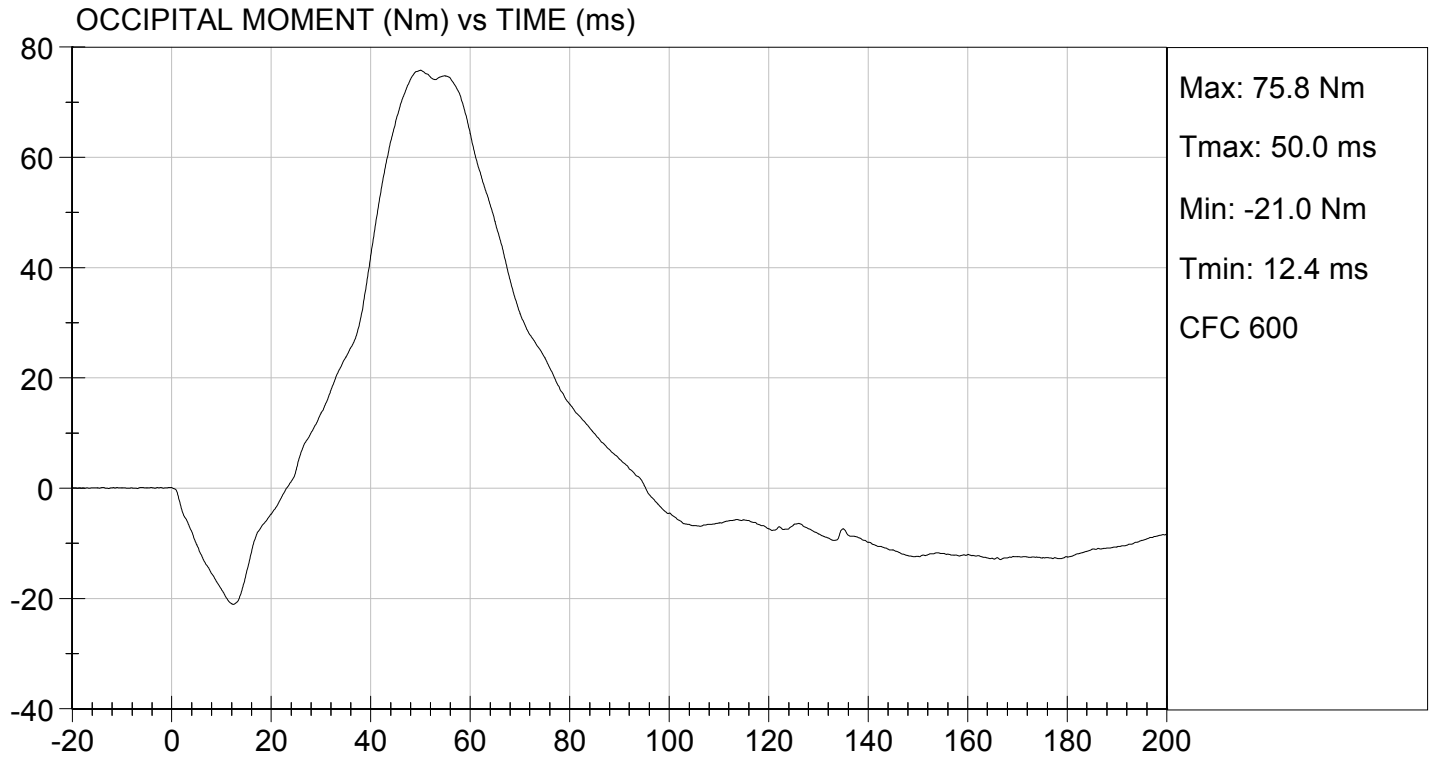

MGA RESEARCH CORPORATION
NECK EXTENSION TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: 634



Test I.D: D154053


Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.0	Pass
Laboratory Relative Humidity		%	10 to 70	31	Pass
Pendulum Speed		m/s	5.95 to 6.19	6.05	Pass
Pendulum Velocity	10 ms	m/s	1.5 to 1.9	1.7	Pass
	20 ms	m/s	3.1 to 3.9	3.7	Pass
	30 ms	m/s	4.6 to 5.6	5.4	Pass
D Plane Rotation	Max	deg	99 to 114	104	Pass
Occipital Condyle Moment within Rotation Corridor		Nm	-65 to -53	-57	Pass
Negative Moment Time Curve Decay to -10 Nm		ms	94 to 114	101	Pass
Overall Results					Pass

Jack Coleman
 Laboratory Technician

12/08/2015
 Test Date

Jessica Hall
 Approved By

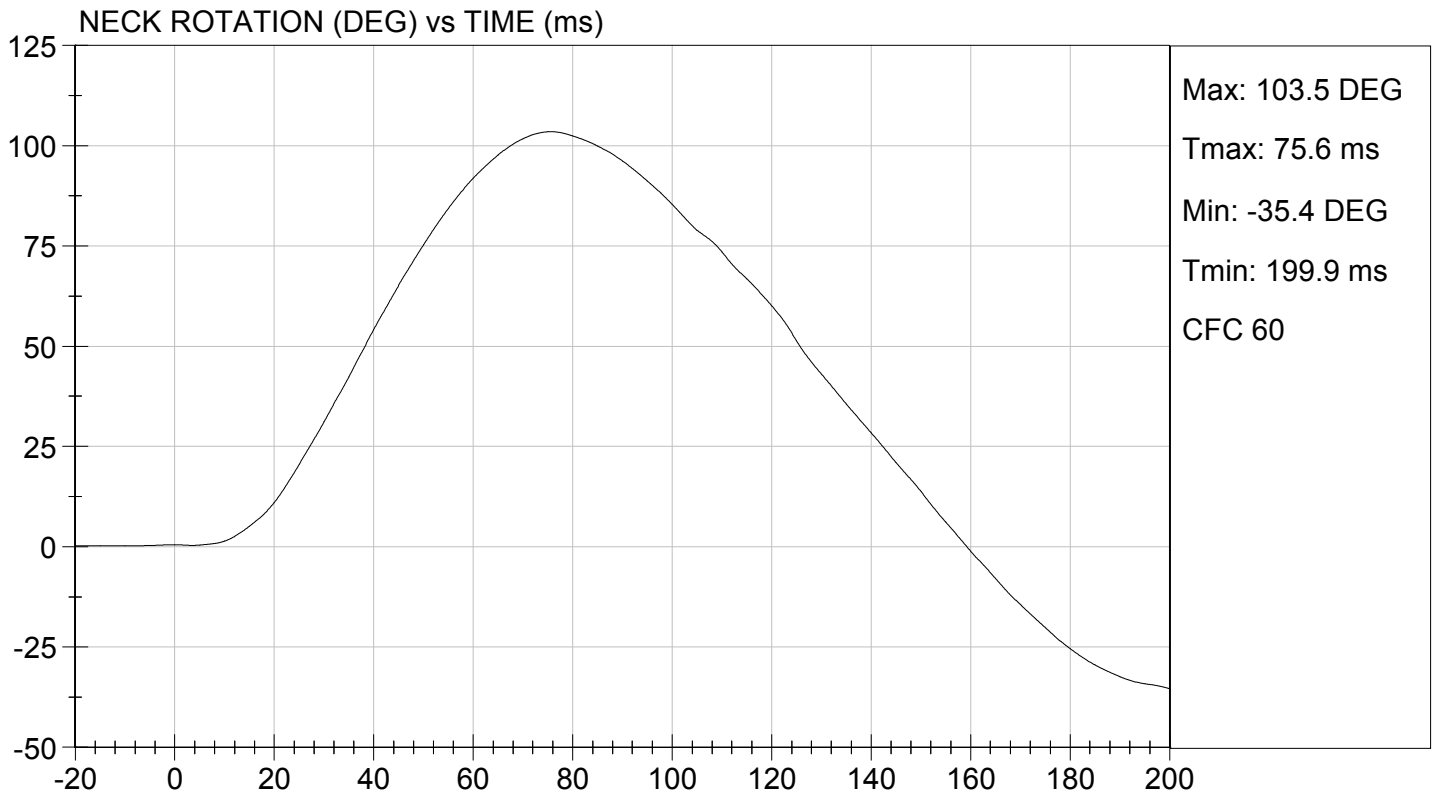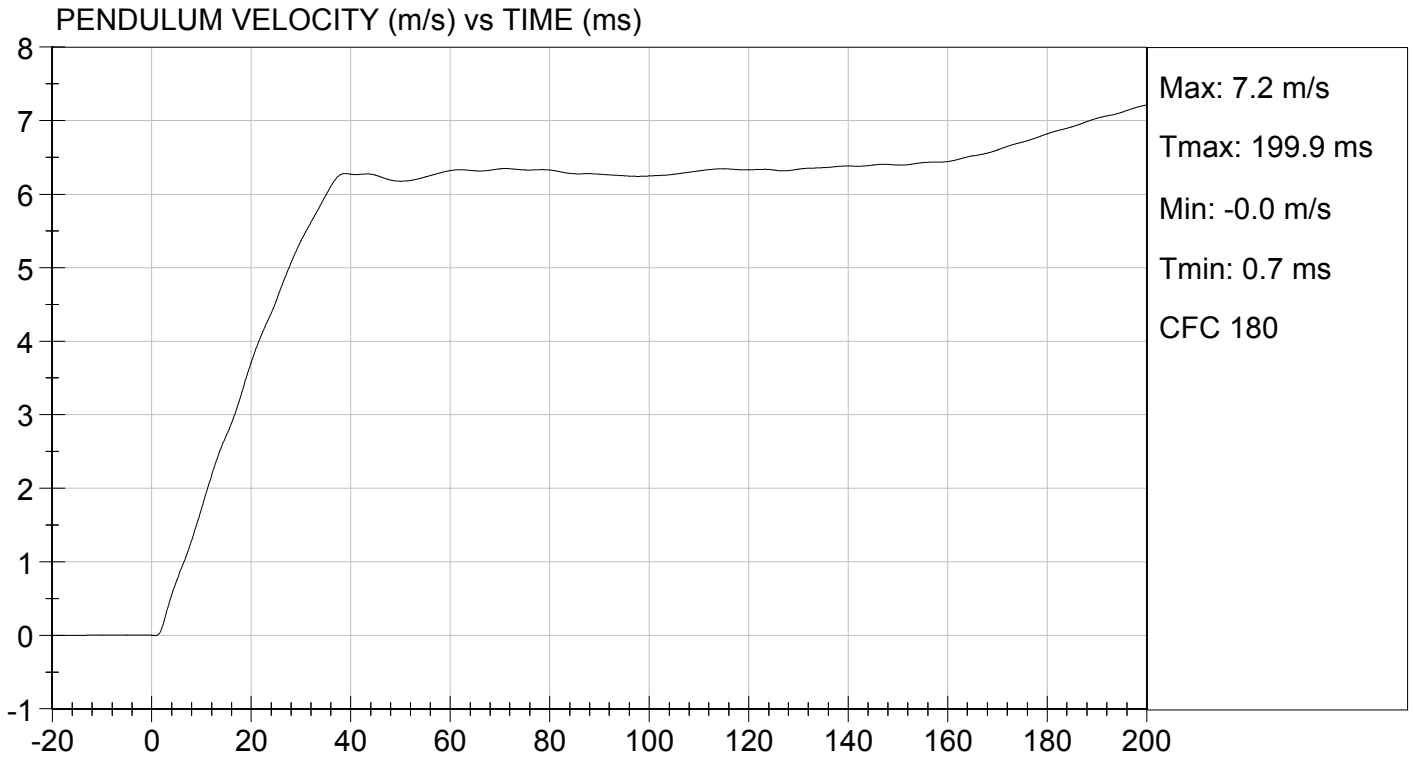

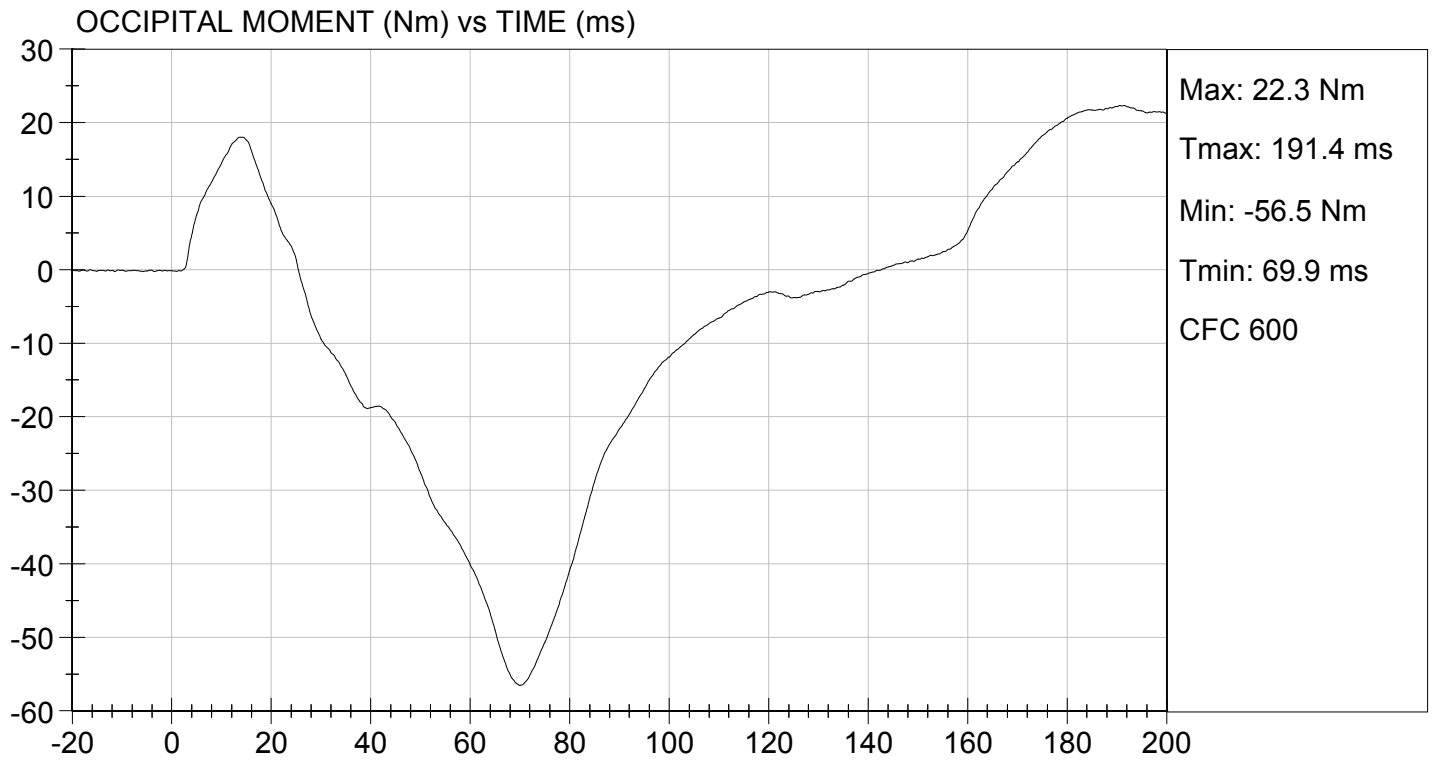

MGA RESEARCH CORPORATION
THORAX IMPACT
HYBRID III 5TH PERCENTILE

ATD Serial No: 634


Test I.D: D154054

Tested Parameter	Units	Specification	Result	Pass/Fail
Temperature	deg C	20.6 to 22.2	21.3	Pass
Relative Humidity	%	10 to 70	34	Pass
Probe Speed	m/s	6.59 to 6.83	6.68	Pass
Peak Deflection	mm	50 to 58	53	Pass
Peak Resistive Force w/in Deflection Corridor	N	3900 to 4400	4259	Pass
Internal Hysteresis	%	69 to 85	72	Pass
Peak Force 18 mm - 50 mm	N	<= 4600	4256	Pass
Overall Test Results				Pass

Jack Coleman
 Laboratory Technician

12/08/2015
 Test Date

Jessica Hall
 Approved By

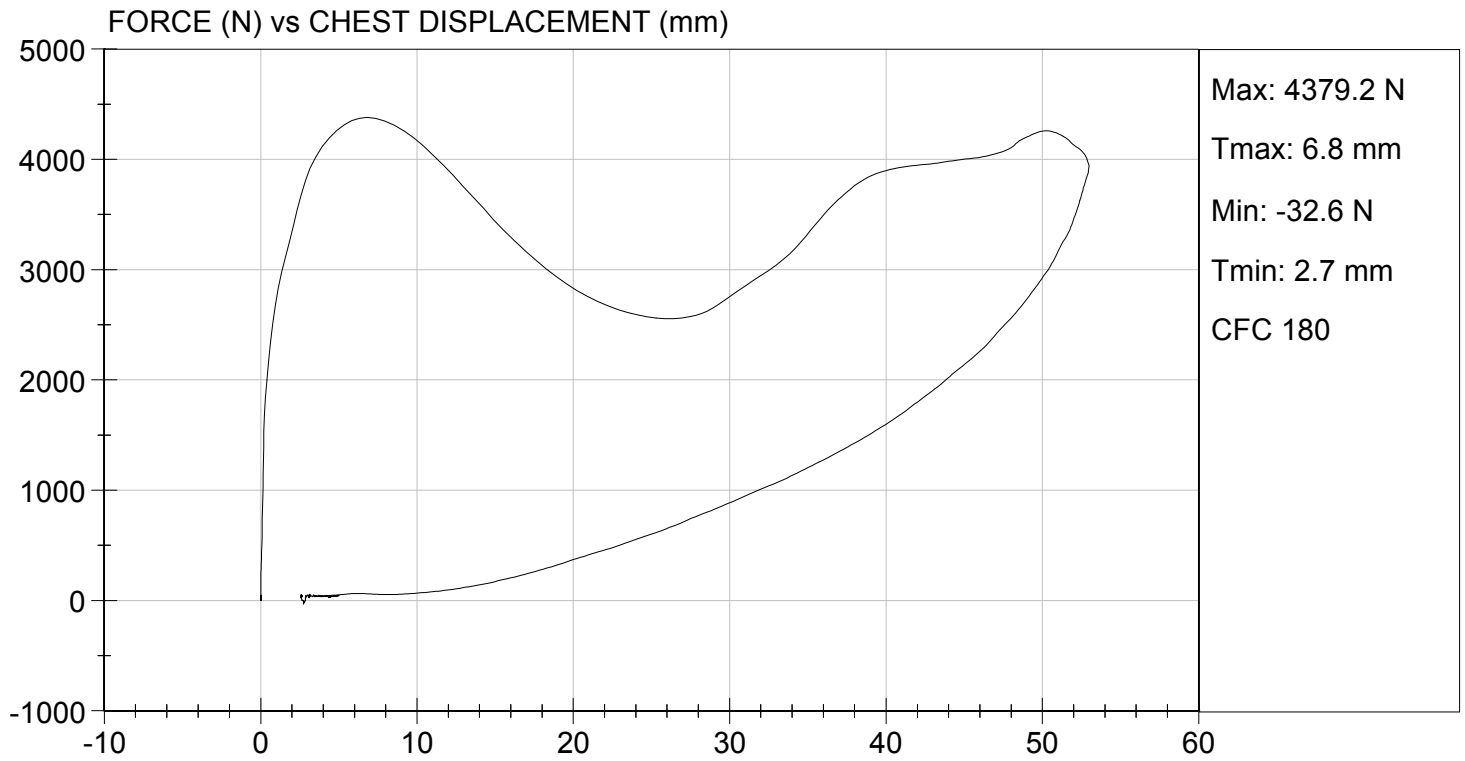

MGA RESEARCH CORPORATION
RIGHT KNEE IMPACT TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: 634

Test I.D: D154055

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.5	Pass
Laboratory Relative Humidity	%	10 to 70	31	Pass
Probe Speed	m/s	2.07 to 2.13	2.10	Pass
Maximum Force	N	3450 to 4060	3516	Pass
Overall Test Results				Pass

Tom A. Hill

Laboratory Technician

12/07/2015

Test Date


Jessica Hall

Approved By



TEST DESC: RIGHT KNEE
VELOCITY: 6.89 ft/s, 2.10 m/s

TEST DATE: 12/07/2015
TEST #: D154055

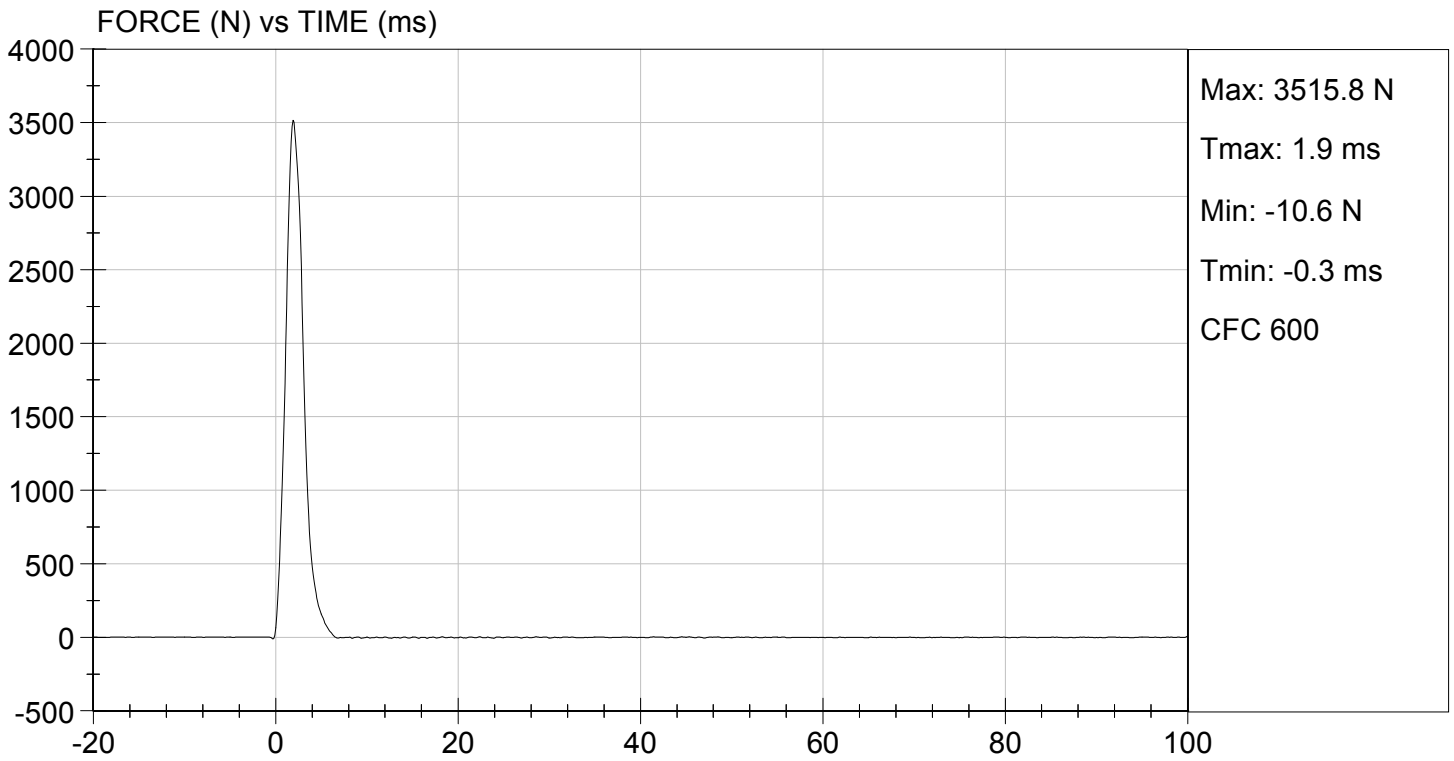

MGA RESEARCH CORPORATION

LEFT KNEE IMPACT TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: 634

Test I.D: D154056

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.5	Pass
Laboratory Relative Humidity	%	10 to 70	31	Pass
Probe Speed	m/s	2.07 to 2.13	2.10	Pass
Maximum Force	N	3450 to 4060	3875	Pass
Overall Test Results				Pass



Laboratory Technician

12/07/2015

Test Date




Approved By



TEST DESC: LEFT KNEE
VELOCITY: 6.89 ft/s, 2.10 m/s

TEST DATE: 12/07/2015
TEST #: D154056

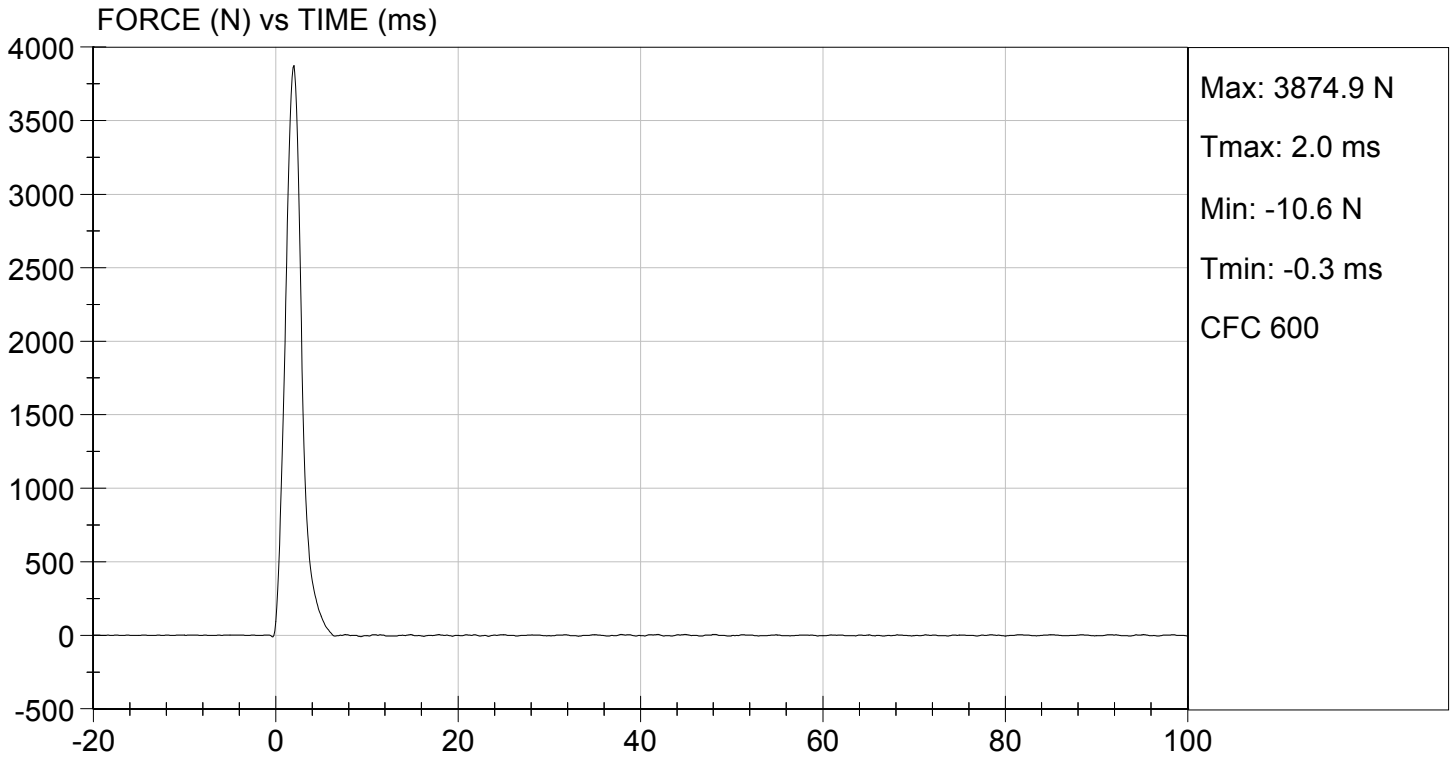

MGA RESEARCH CORPORATION
TORSO FLEXION TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: 634

Test I.D: D154057

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	29	Pass
Initial Angle	deg	0 to 20	12	Pass
Return Angle	deg	+/- 8	5	Pass
Force at 45 deg	N	320 to 390	329	Pass
Upper Torso Deflection Rate	deg/s	0.5 to 1.5	0.9	Pass
Overall Result				Pass

Jack Coleman
 Laboratory Technician

12/08/2015

Test Date

Jessica Hall
 Approved By

**MGA RESEARCH CORPORATION
HEAD DROP TEST
HYBRID III 5TH PERCENTILE**

ATD Serial No: 634

Test ID: D16031

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	18	Pass
Peak Resultant Acceleration	G's	250 to 300	283	Pass
Peak Lateral Acceleration	G's	<= +/- 15.0	8.7	Pass
Unimodal	N/A	Yes	Yes	Pass
Oscillations	N/A	within 10% of peak	Yes	Pass
Overall Test Results				Pass





 Laboratory Technician



01/05/2016

 Test Date



 Approved By

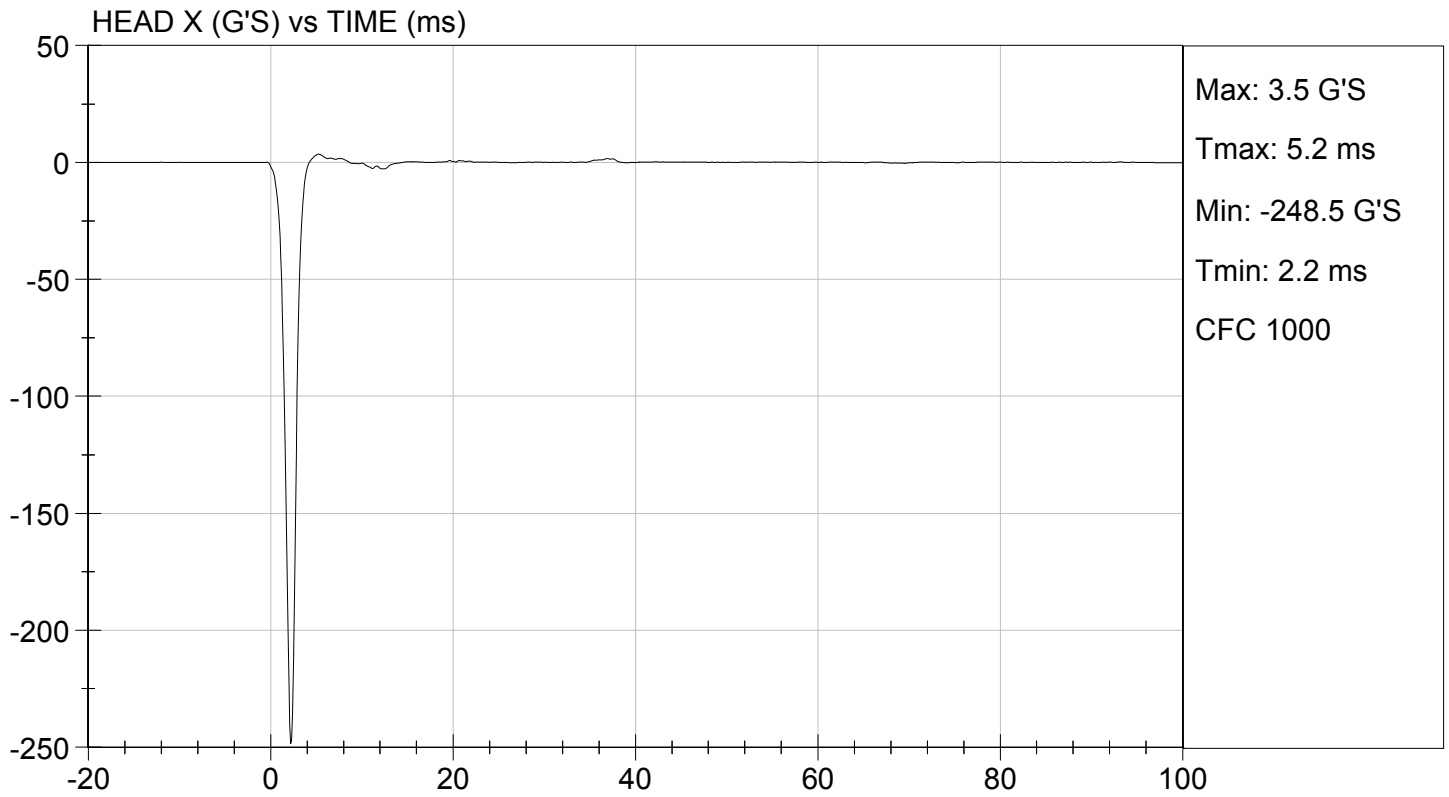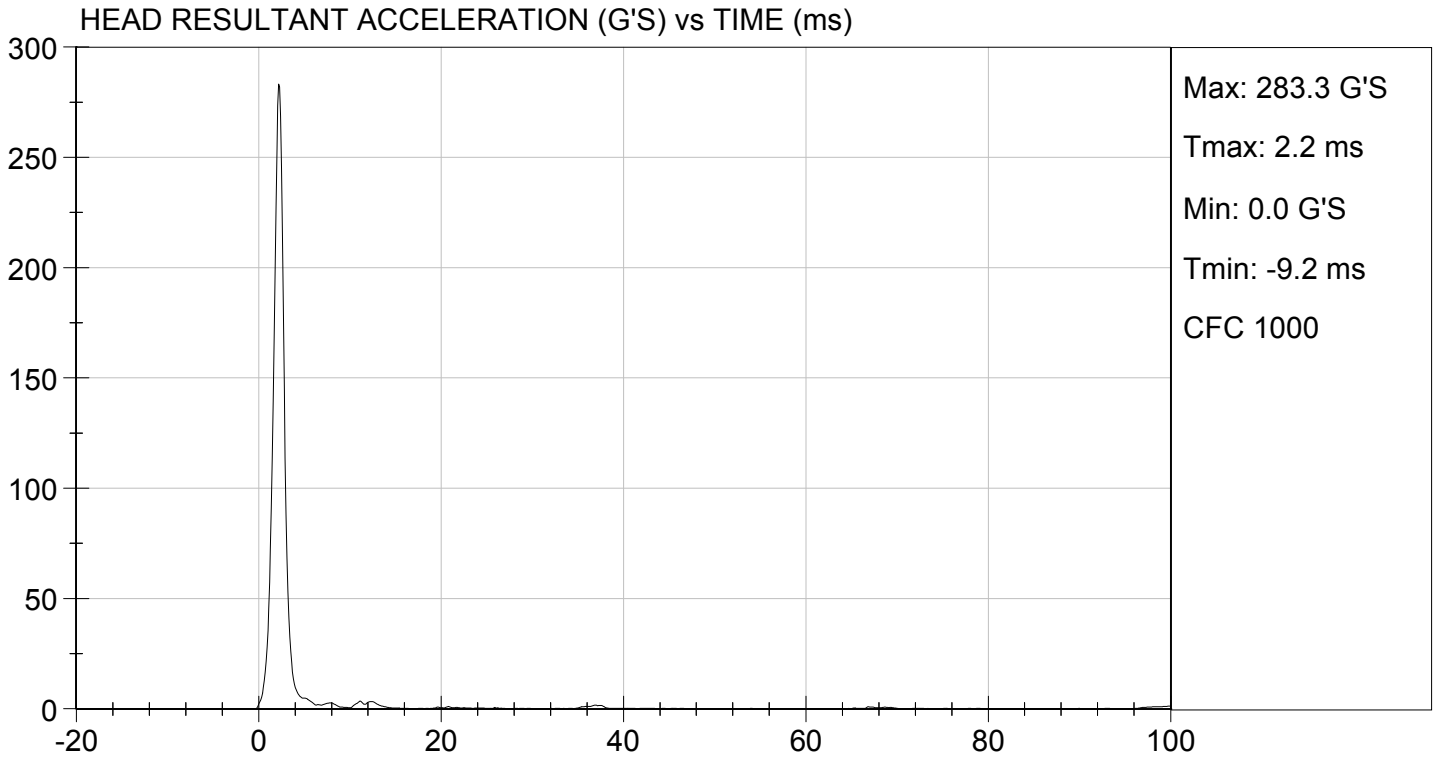

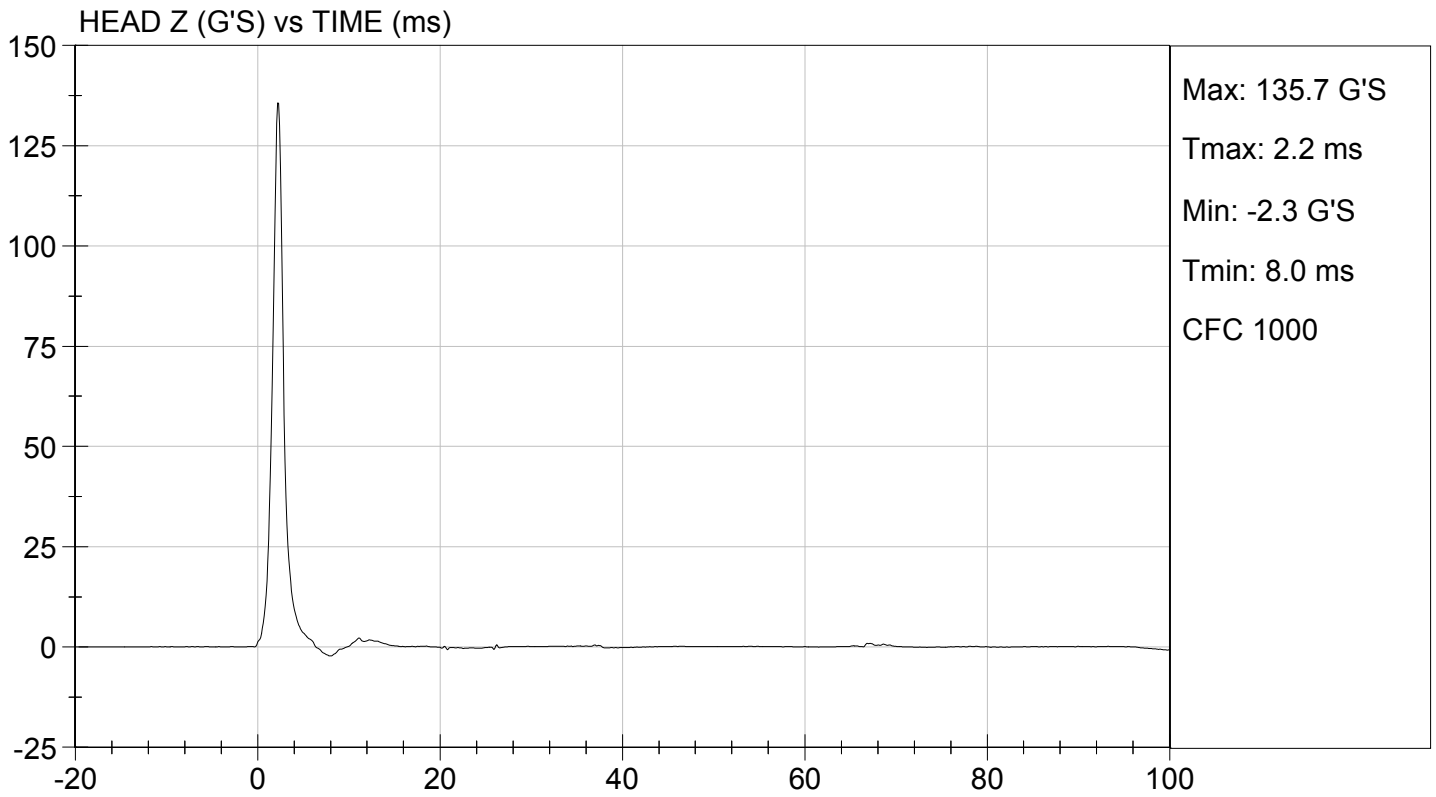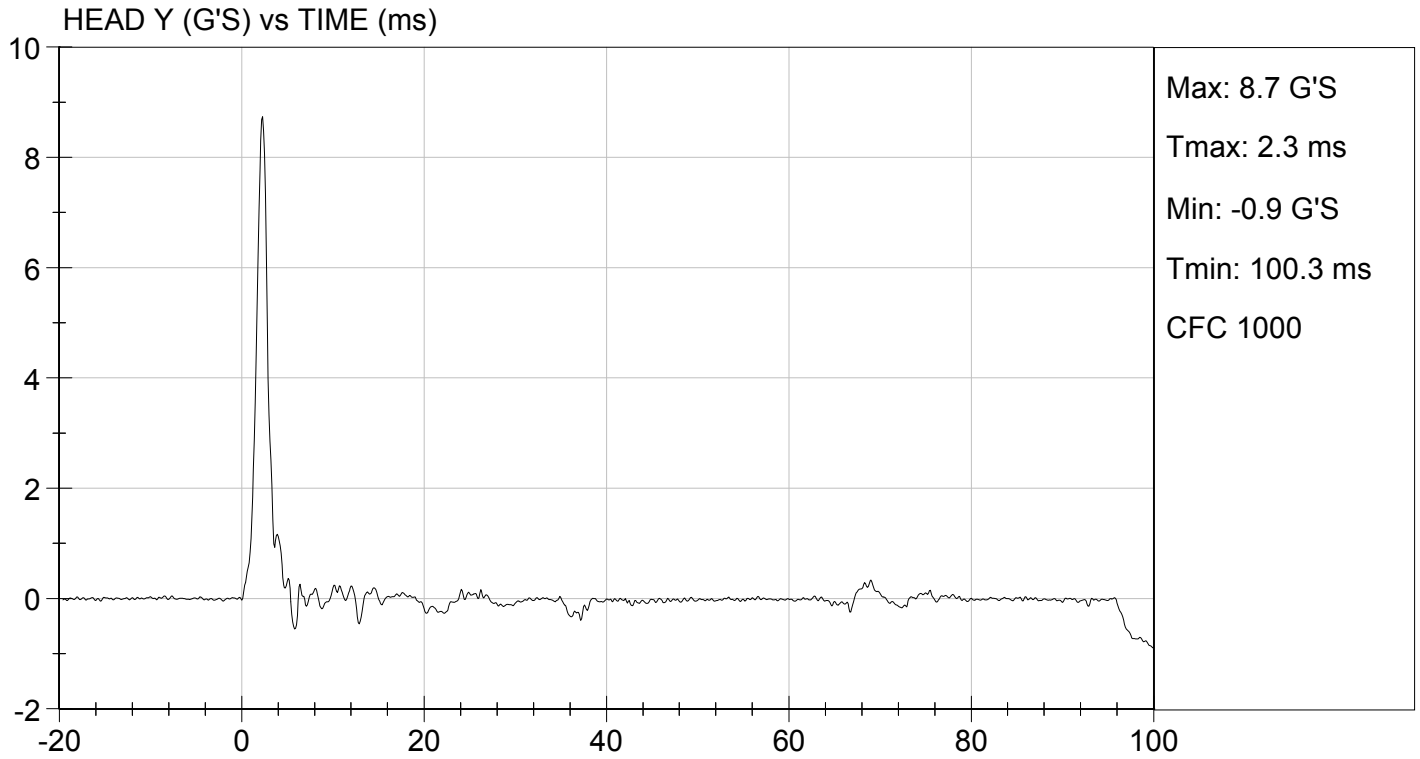

MGA RESEARCH CORPORATION


NECK FLEXION TEST

HYBRID III 5TH PERCENTILE

ATD Serial No: 634

Test I.D.: D16032

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.4	Pass
Laboratory Relative Humidity		%	10 to 70	20	Pass
Pendulum Speed		m/s	6.89 to 7.13	7.06	Pass
Pendulum Velocity	10 ms	m/s	2.1 to 2.5	2.5	Pass
	20 ms	m/s	4.0 to 5.0	4.7	Pass
	30 ms	m/s	5.8 to 7.0	6.7	Pass
D Plane Rotation	Max	deg	77 to 91	79	Pass
Occipital Condyle Moment within Rotation Corridor		Nm	69 to 83	72	Pass
Positive Moment Time Curve Decay to 10 Nm		ms	80 to 100	90	Pass
Overall Results					Pass

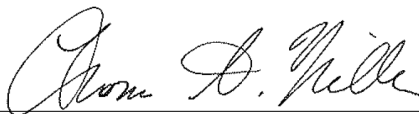



Laboratory Technician


01/05/2016

Test Date



Approved By

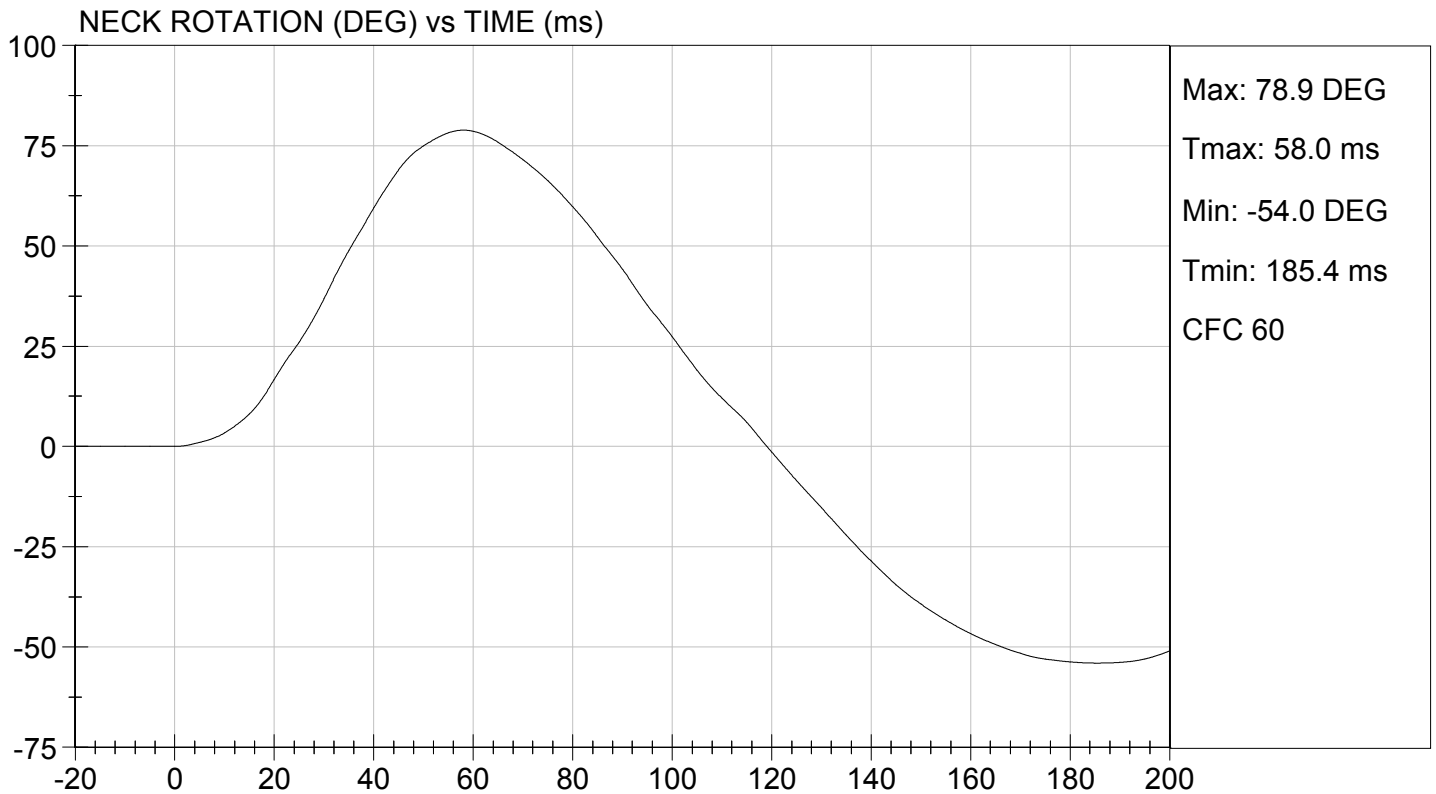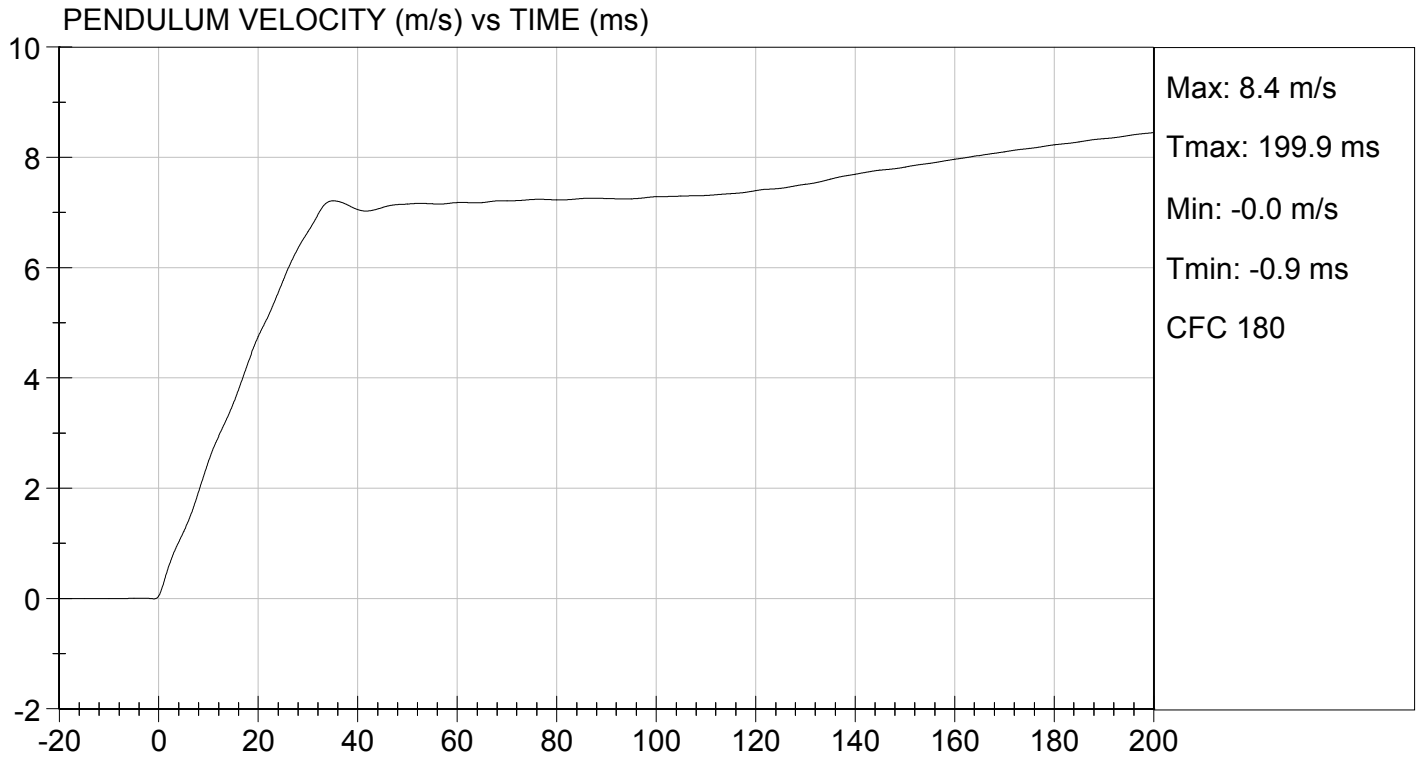

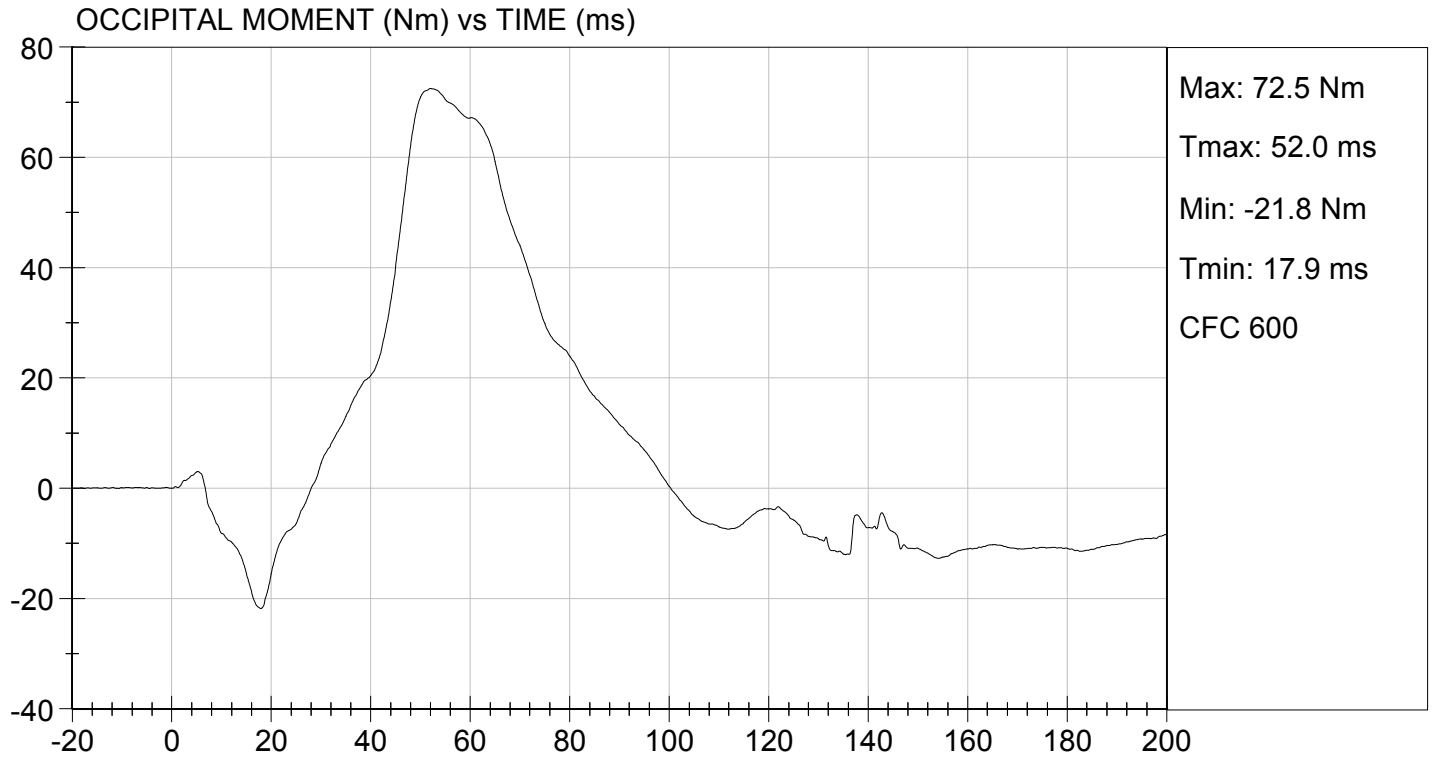

MGA RESEARCH CORPORATION
NECK EXTENSION TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: 634



Test I.D: D16033


Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.4	Pass
Laboratory Relative Humidity		%	10 to 70	18	Pass
Pendulum Speed		m/s	5.95 to 6.19	6.12	Pass
Pendulum Velocity	10 ms	m/s	1.5 to 1.9	1.8	Pass
	20 ms	m/s	3.1 to 3.9	3.8	Pass
	30 ms	m/s	4.6 to 5.6	5.6	Pass
D Plane Rotation	Max	deg	99 to 114	110	Pass
Occipital Condyle Moment within Rotation Corridor		Nm	-65 to -53	-55	Pass
Negative Moment Time Curve Decay to -10 Nm		ms	94 to 114	103	Pass
Overall Results					Pass


 Laboratory Technician

01/05/2016
 Test Date


 Approved By

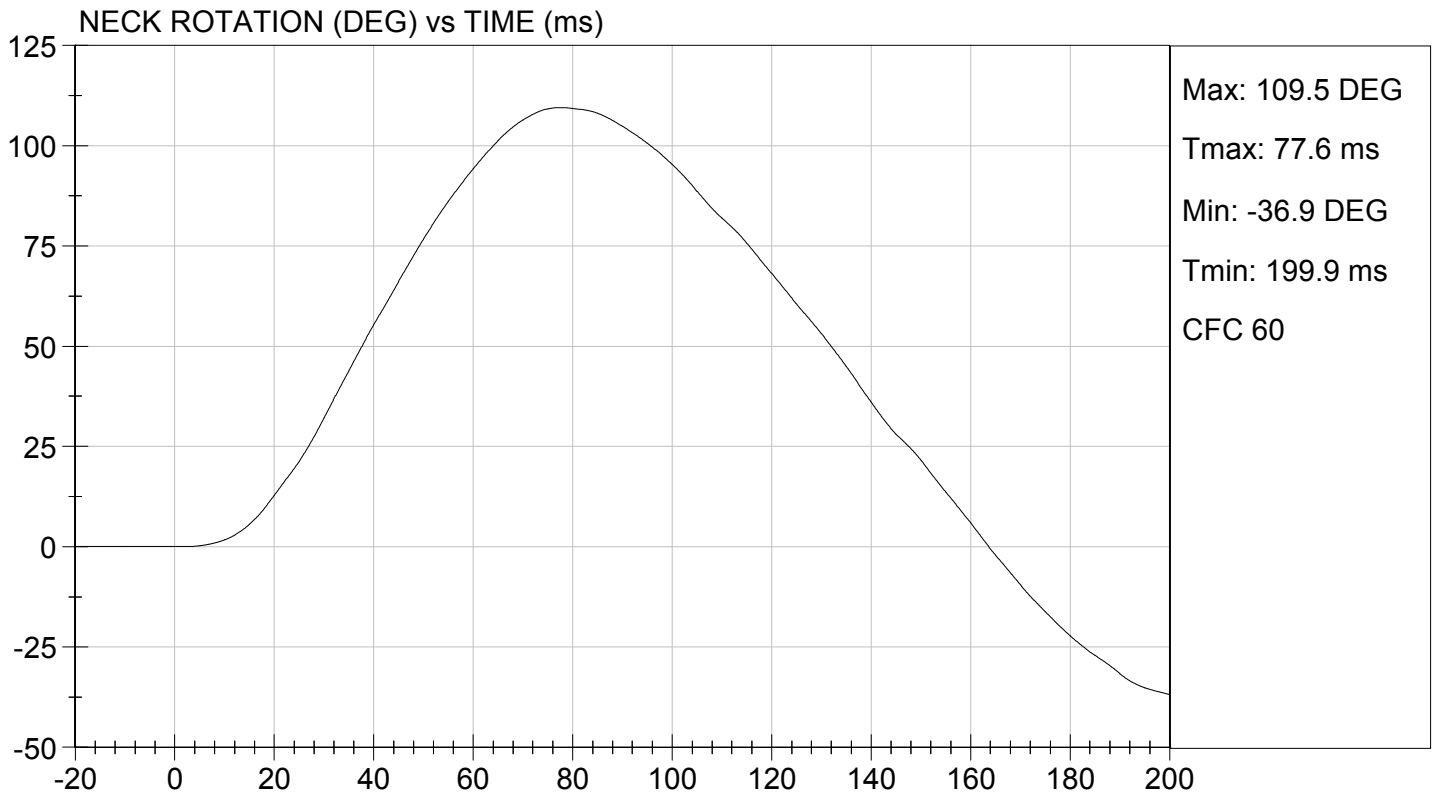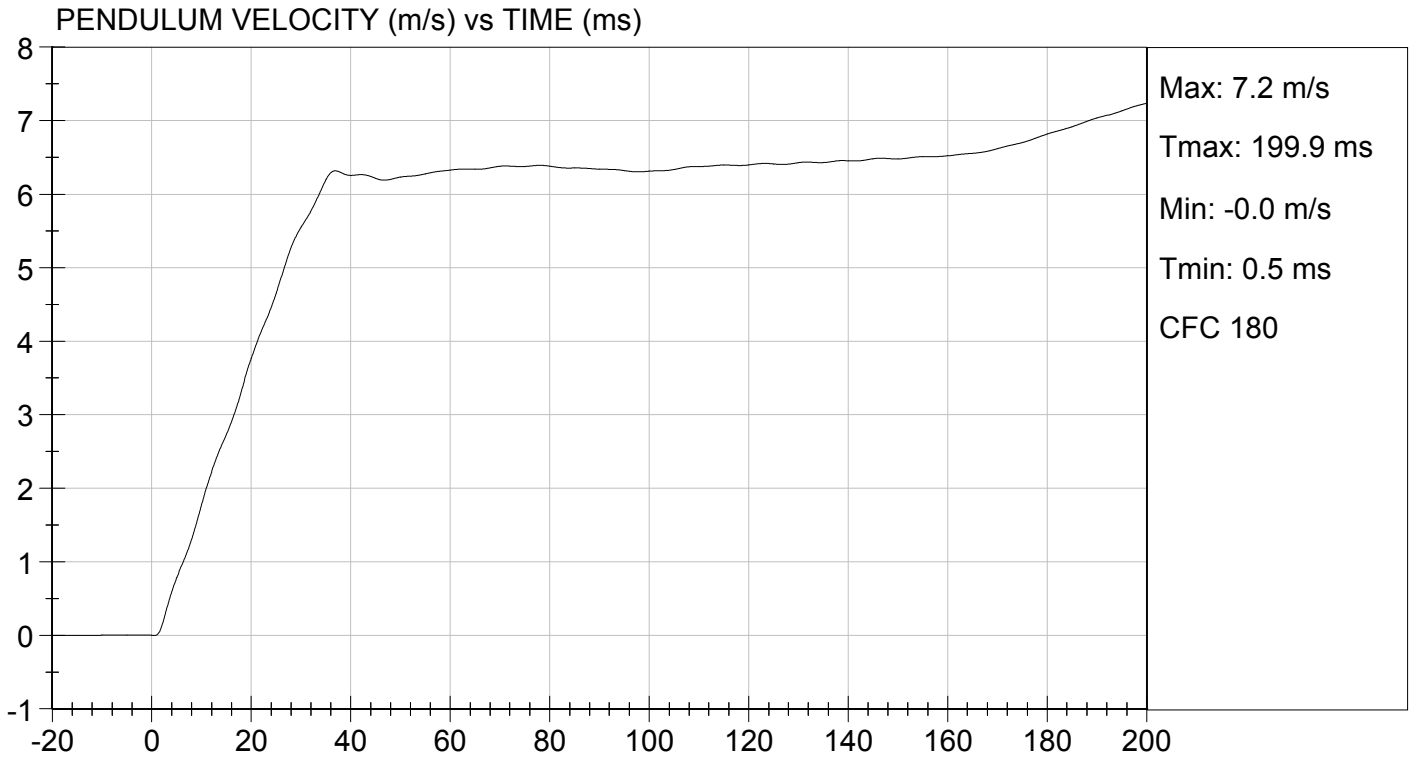

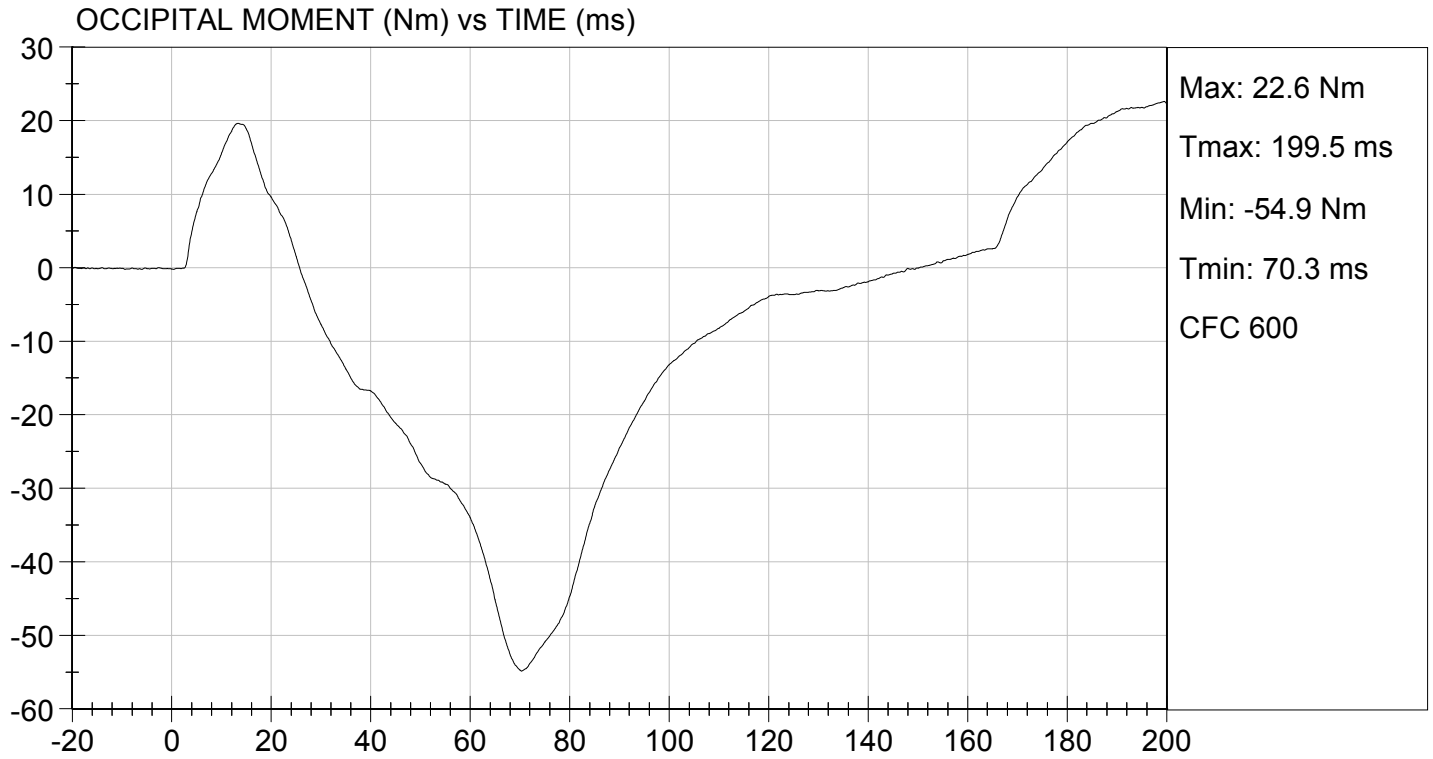


MGA RESEARCH CORPORATION
THORAX IMPACT
HYBRID III 5TH PERCENTILE

ATD Serial No: 634

Test I.D: D16034

Tested Parameter	Units	Specification	Result	Pass/Fail
Temperature	deg C	20.6 to 22.2	21.1	Pass
Relative Humidity	%	10 to 70	17	Pass
Probe Speed	m/s	6.59 to 6.83	6.77	Pass
Peak Deflection	mm	50 to 58	56	Pass
Peak Resistive Force w/in Deflection Corridor	N	3900 to 4400	4162	Pass
Internal Hysteresis	%	69 to 85	76	Pass
Peak Force 18 mm - 50 mm	N	<= 4600	4160	Pass
Overall Test Results				Pass

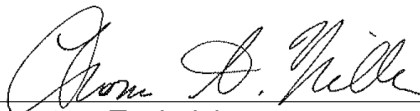


Laboratory Technician

01/06/2016

Test Date



Approved By

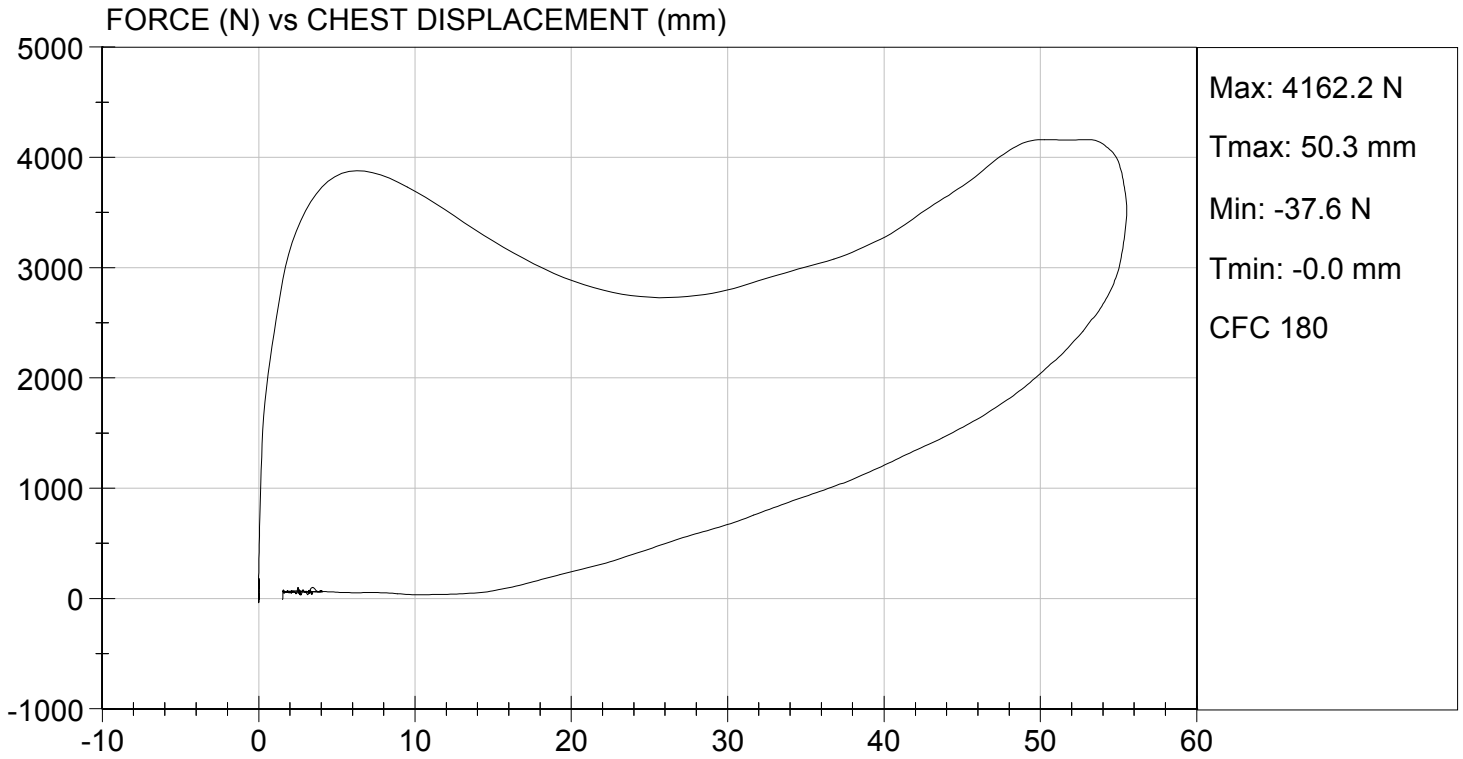


MGA RESEARCH CORPORATION
RIGHT KNEE IMPACT TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: 634

Test I.D: D16035

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	18	Pass
Probe Speed	m/s	2.07 to 2.13	2.11	Pass
Maximum Force	N	3450 to 4060	3809	Pass
Overall Test Results				Pass

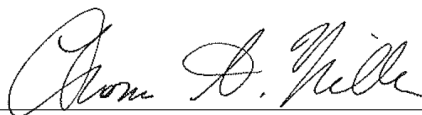

Laboratory Technician

01/05/2016

Test Date




Approved By



TEST DESC: RIGHT KNEE
VELOCITY: 6.92 ft/s, 2.11 m/s

TEST DATE: 01/05/2016
TEST #: D16035

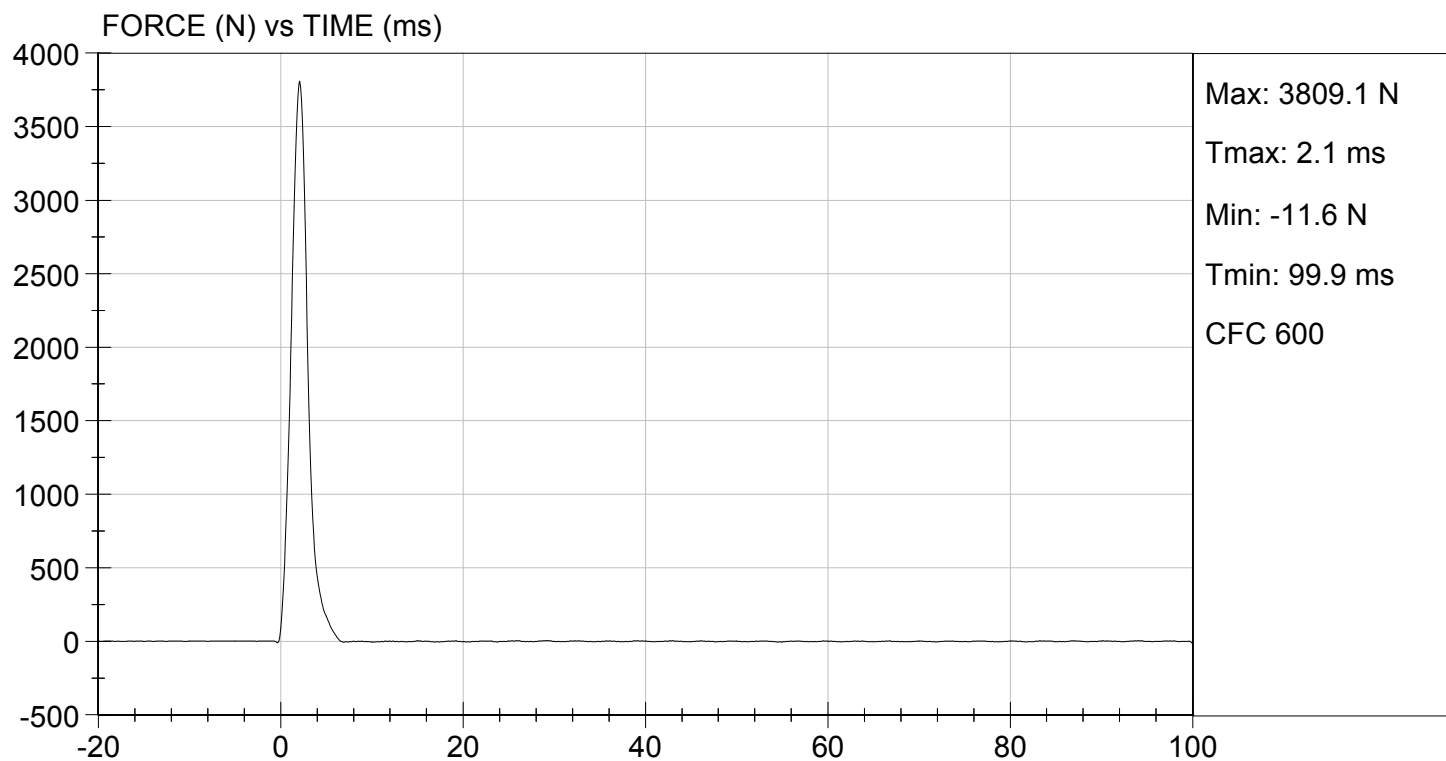

MGA RESEARCH CORPORATION

LEFT KNEE IMPACT TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: 634

Test I.D: D16036

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	18	Pass
Probe Speed	m/s	2.07 to 2.13	2.11	Pass
Maximum Force	N	3450 to 4060	3709	Pass
Overall Test Results				Pass



Laboratory Technician

01/05/2016

Test Date




Approved By



TEST DESC: LEFT KNEE
VELOCITY: 6.92 ft/s, 2.11 m/s

TEST DATE: 01/05/2016
TEST #: D16036

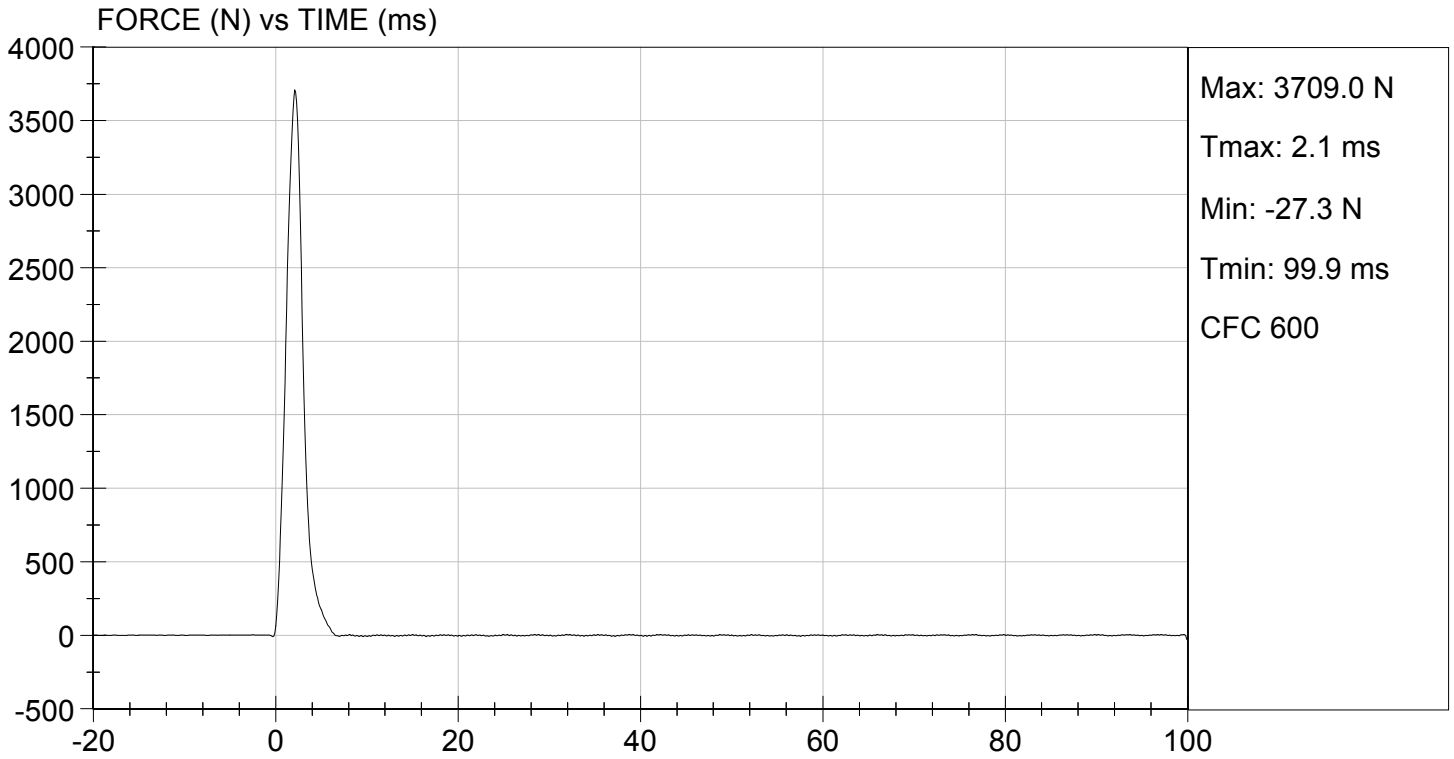

MGA RESEARCH CORPORATION

TORSO FLEXION TEST

HYBRID III 5TH PERCENTILE


ATD Serial No: 634

Test I.D: D16037

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	20	Pass
Initial Angle	deg	0 to 20	20	Pass
Return Angle	deg	+/- 8	4	Pass
Force at 45 deg	N	320 to 390	386	Pass
Upper Torso Deflection Rate	deg/s	0.5 to 1.5	0.9	Pass
Overall Result				Pass


Laboratory Technician

01/05/2016
Test Date

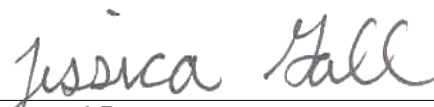
Approved By

