


REPORT NUMBER: 301-CAL-10-5

**SAFETY COMPLIANCE TESTING FOR FMVSS 301
FUEL SYSTEM INTEGRITY – REAR IMPACT**

Toyota Motor Corporation
2010 Lexus HS250h
Sedan

NHTSA NUMBER: CA5111

CALSPAN
TRANSPORTATION SCIENCES CENTER
P.O. BOX 400
BUFFALO, NEW YORK 14225

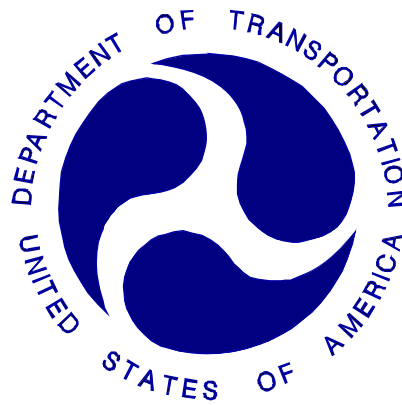

October 12, 2010

FINAL REPORT


U. S. DEPARTMENT OF TRANSPORTATION
National Highway Traffic Safety Administration
Enforcement
Office of Vehicle Safety Compliance (NVS-224)
1200 New Jersey Avenue, SE
Washington, DC 20590

This Final Test Report was prepared for the U.S. Department of Transportation, National Highway Traffic Safety Administration, under Contract No. DTNH22-06-C-00031. This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufactures' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.


Prepared By:


Ed Dutton, Project Engineer

Approved By:

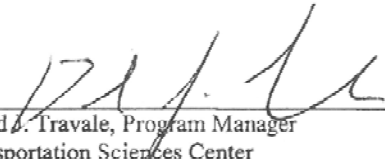
David A. Travale, Program Manager
Transportation Sciences Center

Approval Date:



FINAL REPORT ACCEPTANCE BY:

Accepted By:

Edward E. Chan

Digitally signed by Edward E. Chan
DN: cn=Edward E. Chan, o=National Highway Traffic
Safety Administration, ou=Office of Vehicle Safety
Compliance, email=ed.chan@dot.gov, c=US
Date: 2010.12.22 15:51:56 -05'00'

Acceptance Date:

TECHNICAL REPORT STANDARD TITLE PAGE

1. Report No. 301-CAL-10-5		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle Final Report of FMVSS 301 Compliance Rear Impact Testing of a 2010 Lexus HS250h Sedan NHTSA No.: CA5111				5. Report Date October 12, 2010	
				6. Performing Organization Code CAL	
7. Author(s) Ed Dutton, Project Engineer David J. Travale, Program Manager				8. Performing Organization Report No. tr2496	
9. Performing Organization Name and Address Calspan Corporation Transportation Sciences Center P.O. Box 400 Buffalo, New York 14225				10. Work Unit No.	
				11. Contract or Grant No. DTNH22-06-C-00031	
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Office of Vehicle Safety Compliance- Enforcement 1200 New Jersey Avenue, SE Room W43-503 Washington, D.C. 20590				13. Type of Report and Period Covered Final Report, October 2010	
				14. Sponsoring Agency Code NVS-220	
15. Supplementary Notes					
16. Abstract Compliance tests were conducted on the subject 2010 Lexus HS250h Sedan in accordance with the specifications of the Office of Vehicle Safety Compliance Test Procedure No. TP-301R-02 for the determination of FMVSS 301 compliance. Test failures identified were as follows: None					
17. Key Words Compliance Testing Safety Engineering FMVSS 301				18. Distribution Statement <u>Copies of this report are available from:</u> National Highway Traffic Safety Administration Technical Reference Division (TIS) (NPO-230) 1200 New Jersey Avenue, SE Washington, D.C. 20590 Telephone No. (202) 366-4946	
19. Security Classification of Report UNCLASSIFIED		20. Security Classification of Page UNCLASSIFIED		21. No. of Pages 38	
22. Price					

TABLE OF CONTENTS

<u>Section</u>		<u>Page No.</u>
1	PURPOSE AND TEST PROCEDURE	1-1
2	COMPLIANCE TEST RESULTS SUMMARY	2-1
3	SUMMARY OF TEST RESULTS	3-1
	Data Sheet 1 - Test Vehicle Specifications	3-2
	Data Sheet 2 – Pre-Test Data	3-3
	Data Sheet 3 - Moving Deformable Barrier (MDB) Data	3-5
	Data Sheet 4 - High Speed Camera Locations and Data Summary	3-6
	Data Sheet 5 – Post-Test Data	3-7
	Data Sheet 6 – FMVSS 301 Rollover Data	3-9
APPENDIX A	PHOTOGRAPHS	A-1

SECTION 1

PURPOSE AND TEST PROCEDURE

This rear impact test is part of the FMVSS 301 Compliance Test Program sponsored by the National Highway Traffic Safety Administration (NHTSA) under Contract No. DTNH22-06-C-00031. The purpose of this test was to determine if the subject vehicle, a 2010 Lexus HS250h Sedan, meets the performance requirements of FMVSS No. 301R-02 “Fuel System Integrity – Rear Impact.” The test was conducted in accordance with the Office of Vehicle Safety Compliance's Laboratory Test Procedure (TP-301R-02, dated January 17, 2007).

SECTION 2

COMPLIANCE TEST RESULTS SUMMARY

A kg 2010 Lexus HS250h Sedan was impacted from the rear by an 1357.0 kg moving barrier at a velocity of 79.5 kph (49.4 mph). The test was performed by Calspan Corporation on October 12, 2010.

The test vehicle was equipped with a 55 liter fuel tank which was filled to 93 percent capacity with stoddard fluid prior to impact. Additional ballast (22 kg) was secured in the vehicle rear seat area. Two ballast Part 572E 50th percentile male Anthropomorphic Test Device (ATD) were placed in the front occupant seating positions.

The crash event was recorded by three high-speed cameras and one real-time camera. High-speed camera locations and other pertinent camera information are found on page 3-6 of this report. Pre- and post-test photographs of the vehicle can be found in Appendix A.

Based on this test, the vehicle as tested appears to comply with all the requirements of FMVSS No. 301 "Fuel System Integrity." The average vehicle longitudinal crush was 587 millimeters.

SECTION 3

SUMMARY OF TEST RESULTS

DATA SHEET 1

TEST VEHICLE SPECIFICATIONS

TEST VEHICLE INFORMATION:

Year/Make/Model/Body Style: 2010 Lexus HS250h Sedan

Vehicle Body Color: Obsidian NHTSA Number: CA5111

Engine Data: 4 Cylinders; CID; 2.4 Liters; cc

Transmission: ECVT Speed; Manual; x Automatic; Overdrive

Final Drive: Rear Wheel Drive; x Front Wheel Drive; Four Wheel Drive

MAJOR TEST VEHICLE OPTIONS:

x AC; x Pwr Steering; x Power Brakes; x Power Locks; x Power Seats
x ABS; x Tilt Wheel; Stab Control Traction Control x Anti-Theft

DEALER AND DELIVERY INFORMATION:

Date Received: Sept. 8, 2010 ; Odometer Reading 12.9 km

Selling Dealer: Classic Lexus
2551 Som Center Rd; Willoughby, OH 44094

DATA FROM VEHICLE'S CERTIFICATION LABEL:

Vehicle Manufacturer: Toyota Motor Corporation

Vehicle Build Date: 1/10

VIN: JTHBB1BA6A2026282

GVWR: 2125 kg; GAWR: 1161 kg FRONT; 1000 kg REAR

DATA FROM VEHICLE'S TIRE LABEL AND SIDEWALL:

Location of Tire Placard: Driver door sill

Type of Spare Tire: T145/70D17

Maximum Tire Pressure (sidewall - kPa)

Cold Pressure (tire placard - kPa) – test pressure

Recommended Tire Size (tire placard)

Vehicle Tire Size with load index & speed symbol

Tire Manufacturer

Tire Name

Treadwear, Traction, Temperature

<u>Front</u>	<u>Rear</u>
300	300
230	230
P215/55R17	P215/55R17
P215/55R17	P215/55R17
Michelin	Michelin
Energy MXV4 S8	Energy MXV4 S8
440, A, A	440, A, A

VEHICLE CAPACITY DATA:

Type of Front Seats: Bench; x Bucket; Split Bench

Number of Occupants: 2 Front; 3 Rear; 5 Total

Vehicle Capacity Weight (VCW) = 375 kg

No. of Occupants x 68.04 kg = 340.2 kg

Rated Cargo/Luggage Weight (RCLW) = 34.8 kg

DATA SHEET 2

PRE-TEST DATA

WEIGHT OF TEST VEHICLE AS RECEIVED FROM DEALER (with maximum fluids)= UDW:

	Left Side (kg)	Right Side (kg)	Ratio (%)	Total (kg)
Front =	514.5	489	60.3	1003.5
Rear =	333.5	327	39.7	660.5
Total Delivered Weight (UDW) =				1664

CALCULATION OF VEHICLE'S TARGET TEST WEIGHT:

Total Delivered Weight (UDW) =	1664	kg
Rated Cargo/Luggage Weight (RCLW) =	34.8	kg
Weight of 2 p.572E Dummies @ 78 each =	148	kg
TARGET TEST WEIGHT =	1846.8	kg

WEIGHT OF TEST VEHICLE WITH TWO DUMMIES AND 22 KG OF CARGO WEIGHT:

	Left Side (kg)	Right Side (kg)	Ratio (%)	Total (kg)
Front =	564	531	59.6	1095
Rear =	371	372	40.4	743
Total Vehicle Test Weight (ATW) =				1838

Weight of Ballast Secured in Vehicle¹ = 22 kg Ballast Type Lead shot

Method of securing Ballast: Rear footwell

Components Removed for Weight Reduction: None

VEHICLE ATTITUDE (all dimension in millimeters):

	Left Front	Right Front	Left Rear	Right Rear	CG ²
AS DELIVERED:	720	733	726	721	1074
AS TESTED:	707	716	708	707	1094

Vehicle's Wheel Base: 2706 mm

¹Ballast weight does not include the weight of instrumentation, on-board cameras and data acquisition system

²Rearward of the front axle centerline.

VEHICLE PRE-TEST WIDTH AND IMPACT OFFSET MEASUREMENT:

Vehicle Width at Widest Point: 1792 mm

Location: Front wheel fender

Centerline offset for impact line: 358 mm

Filler neck side (left/right) left


DATA SHEET 2 (continued)

PRE-TEST DATA

Vehicle: 2010 Lexus HS250h Sedan

NHTSA No. CA5111

Nominal Design Riding Position for adjustable driver and passenger seat backs. Please describe how to position the inclinometer to measure the seat back angle. Include description of the location of the adjustment latch detent, if applicable.



Seat back angle for driver's seat: See below

Measurement instructions: Headrest post set at 89 degrees with level sill.

Seat back angle for passenger's seat: Same as driver

Measurement instructions: Headrest post set at 89 degrees with level sill.

2. SEAT FORE AND AFT POSITIONING:

Positioning of the driver's seat: Full range of travel 290 mm. Seat was set full down mid at 145

Positioning of the passenger's seat: Mid position

3. FUEL TANK CAPACITY DATA:

3.1 A. "Usable Capacity" of the standard equipment fuel tank is 55.0 liters

B. "Usable Capacity" of the optional equipment fuel tank is n/a liters

C. "Usable Capacity" of the vehicle(s) used for certification testing to requirements of FMVSS 301 = 50.6 to 51.7 liters

3.2 Actual Amount of Stoddard solvent added to vehicle for test = 51.1 liters

Stoddard Fluid: specific gravity: 0.764; kinematic viscosity: 0.96 centistokes; color: Purple

3.3 Is vehicle equipped with electric fuel pump? Yes- x; No-

If YES, explain the vehicle operating conditions under which the fuel pump will pump fuel.

Hybrid vehicle. Fuel pump starts when vehicle ignition is on and gasoline engine is operating.

4. STEERING COLUMN ADJUSTMENTS:

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes when it is moved through its full range of driving positions. If the tested vehicle has any of these adjustments, does your company use any specific procedures to determine the geometric center.

Operational Instructions: Centered at geometric center of tilt. Telescope wheel centered at mid range of Travel.

5. SEAT BELT UPPER ANCHORAGE:

Nominal design riding position:

Full up

6. COMMENTS:

None

DATA SHEET 3

MOVING DEFORMABLE BARRIER (MDB) DATA

Vehicle: 2010 Lexus HS250h Sedan

NHTSA No. CA5111

MDB FACE MANUFACTURER AND SERIAL NUMBER:

Plascore serial number A0810004

MDB DETAILS:

Overall Width of Framework Carriage	=	<u>1250</u>	millimeters
Overall Length of MDB (incl. honeycomb impact face)	=	<u>4120</u>	millimeters
Wheelbase of Framework Carriage	=	<u>2591</u>	millimeters
Tread of Framework Carriage (Front & Rear)	=	<u>1875</u>	millimeters
C.G. Location Rearward of Front Axle	=	<u>1136</u>	millimeters

MDB WEIGHT:

Left Front	=	<u>358.0</u>	kg	Left Rear	=	<u>322.0</u>	kg
Right Front	=	<u>404.0</u>	kg	Right Rear	=	<u>273.0</u>	kg
TOTAL FRONT =		<u>762.0</u>	kg	TOTAL REAR =		<u>595.0</u>	kg
TOTAL MDB WEIGHT =		<u>1357.0</u>	kg				
Tires (Mfr, line, size):		<u>Dunlop Radial Rover AT P205/75R15</u>					

TIRE PRESSURE:

Left Front	=	<u>207</u>	kPa	Left Rear	=	<u>207</u>	kPa
Right Front	=	<u>207</u>	kPa	Right Rear	=	<u>207</u>	kPa

Brake Abort System? (Yes/No) Yes


Date of Last Calibration: 5/15/2010

DATA SHEET 4

HIGH SPEED CAMERA LOCATIONS AND DATA SUMMARY

Vehicle: 2010 Lexus HS250h Sedan

NHTSA No. CA5111

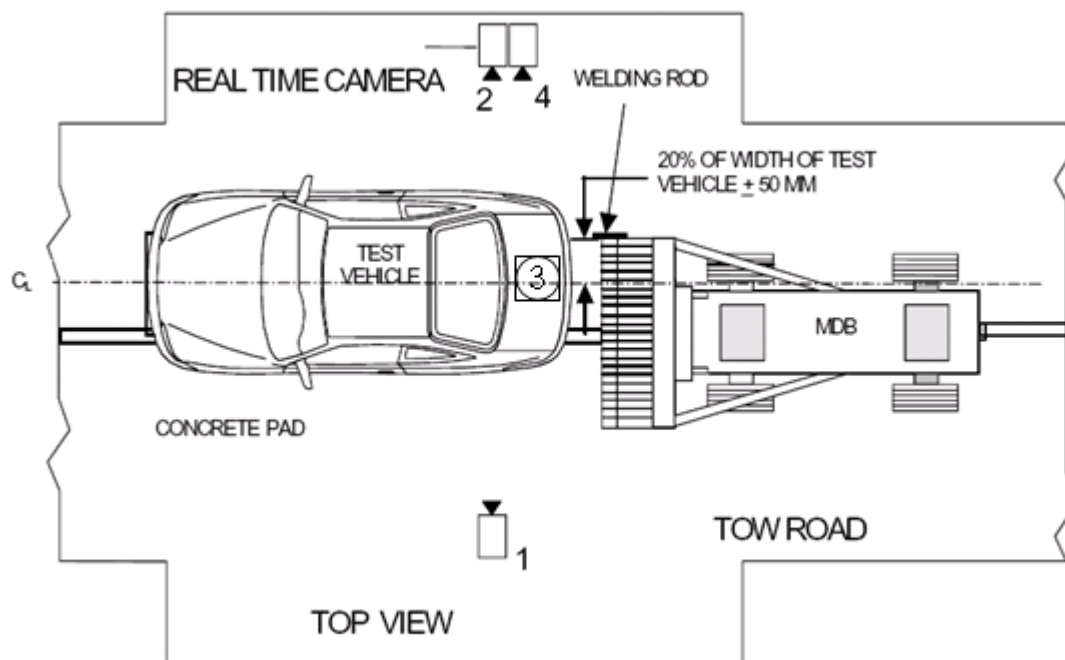

Camera No.	View	Coordinates (millimeters)			Angle (deg.)	Lens (mm)	Film Speed (fps)
		X*	Y*	Z*			
1	Left Side View	7040	1190	925	-1.6	24	1000
2	Real-Time Camera	-	-	-	-	-	30
3	Overhead View	0	780	4900	-90	20	1000
4	Right Side View	7460	1550	945	-0.4	24	1000

* Reference (from point of impact); all measurements accurate to within ± 6 mm.

X = (Impact Point) + Forward

Y = (Impact Point) + To Right

Z = (Ground Level) + Down

DATA SHEET 5

POST-TEST DATA

Vehicle: 2010 Lexus HS250h Sedan

NHTSA No. CA5111

REQUIRED IMPACT VELOCITY RANGE:: 78.5 to 80.1 km/h

ACTUAL IMPACT VELOCITY WITHIN 1.5 M OF IMPACT PLANE:

Trap No. 1 = 79.5 km/h Trap No. 2 = 79.6 km/h

Average Impact Speed = 79.55 km/h

WELDING ROD IMPACT POINT:

-24 Vertical distance from target center (+ is above) Tolerance: ± 40 mm

12 to right Horizontal distance from target center (+ is right) Tolerance: ± 50 mm

STODDARD SOLVENT SPILLAGE MEASUREMENT:

A. Front impact until vehicle motion ceases -

Actual = 0 g Maximum Allowable = 28 g

B. For 5 minute period after vehicle motion ceases -

Actual = 0 g Maximum Allowable = 28 g

C. For next 25 minutes -

Actual = 0 g/minute Maximum Allowable = 28 g/minute

D. Provide Spillage Details:

None

DATA SHEET 5**POST-TEST DATA (Continued)**Vehicle: 2010 Lexus HS250h SedanNHTSA No. CA5111**POST TEST SEAT DATA**

LOCATION	SEAT MOVEMENT (mm)	SEAT BACK FAILURE
P1 (Left Front)	0.0	Seat slightly bent
P2 (Right Front)	0.0	Seat slightly bent

POST TEST ATD CONTACT DATA

LOCATION	Position 1 (Driver)	Position 2 (Passenger)
Head	Head rest	Head rest
Chest	-	-
Abdomen	-	-
Left Knee	-	-
Right Knee	-	-

VEHICLE DIMENSIONS:

Vehicle length (mm.):

	Left Side	Centerline	Right Side
Pre-Test	4623	4698	4624
Post-Test	3935	4096	4154
Crush	688	602	470

Vehicle Wheel Base(mm.):

	Left Side	Right Side
Pre-Test	2706	2701
Post-Test	2568	2730
Crush	138	-29


Comments: None

DATA SHEET 6

FMVSS 301 ROLLOVER DATA

Vehicle: 2010 Lexus HS250h Sedan

NHTSA No.: CA5111

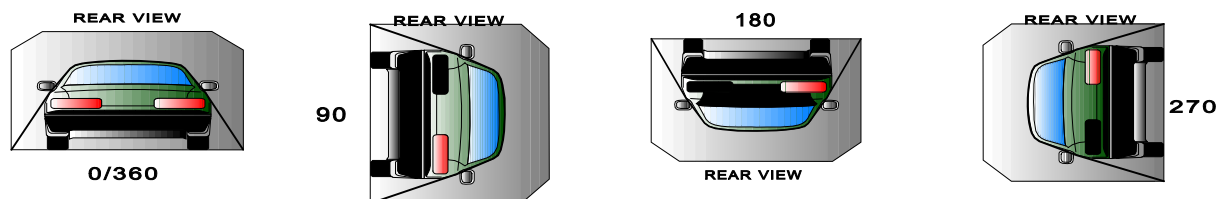

I. DETERMINATION OF SOLVENT COLLECTION TIME PERIOD:

Rollover Stage	Rotation Time (spec. 1 -3 min)				FMVSS 301 Hold Time		Total Time				Next Whole Minute Interval	
0° - 90°	1	minutes	12	seconds	5	minutes	6	minutes	12	seconds	7	minutes
90° - 180°	1	minutes	12	seconds	5	minutes	6	minutes	12	seconds	7	minutes
180°-270°	1	minutes	12	seconds	5	minutes	6	minutes	12	seconds	7	minutes
270°-360°	1	minutes	11	seconds	5	minutes	6	minutes	11	seconds	7	minutes

II. FMVSS 301 REQUIREMENTS: (Maximum allowable solvent spillage):

First 5 minutes from onset of rotation	6th min.	7th min.	8th min. (if required)
142 g	28 g	28 g	28 g

III. ACTUAL TEST VEHICLE SOLVENT SPILLAGE:

Rollover Stage	First 5 minutes from onset of rotation (g)	6th min. (g)	7th min. (g)	8th min. (if required) (g)
0° - 90°	0	0	0	n/a
90° - 180°	0	0	0	n/a
180°-270°	0	0	0	n/a
270°-360°	0	0	0	n/a

Note: Record spillage for whole minute intervals only as determined above.

IV. SOLVENT SPILLAGE LOCATION(S):

Rollover Stage	Spillage Location
0° - 90°	None
90° - 180°	None
180°-270°	None
270°-360°	None

APPENDIX A

PHOTOGRAPHS

NOTE: NHTSA number was not available at test time,
correct NHTSA number is CA5111

TABLE OF PHOTOGRAPHS

Figure #	Photograph Title	Page
Figure A- 1	VEHICLE PLACARD	A- 3
Figure A- 2	TIRE PLACARD	A- 3
Figure A- 3	PRE-TEST FRONT VIEW	A- 4
Figure A- 4	POST-TEST FRONT VIEW	A- 4
Figure A- 5	PRE-TEST LEFT SIDE VIEW	A- 5
Figure A- 6	POST-TEST LEFT SIDE VIEW	A- 5
Figure A- 7	PRE-TEST RIGHT SIDE VIEW	A- 6
Figure A- 8	POST-TEST RIGHT SIDE VIEW	A- 6
Figure A- 9	PRE-TEST LEFT FRONT THREE-QUARTER VIEW	A- 7
Figure A- 10	POST-TEST LEFT FRONT THREE-QUARTER VIEW	A- 7
Figure A- 11	PRE-TEST RIGHT FRONT THREE-QUARTER VIEW	A- 8
Figure A- 12	POST-TEST RIGHT FRONT THREE-QUARTER VIEW	A- 8
Figure A- 13	PRE-TEST LEFT REAR THREE-QUARTER VIEW	A- 9
Figure A- 14	POST-TEST LEFT REAR THREE-QUARTER VIEW	A- 9
Figure A- 15	PRE-TEST RIGHT REAR THREE-QUARTER VIEW	A- 10
Figure A- 16	POST-TEST RIGHT REAR THREE-QUARTER VIEW	A- 10
Figure A- 17	PRE-TEST REAR VIEW	A- 11
Figure A- 18	POST-TEST REAR VIEW	A- 11
Figure A- 19	PRE-TEST MDB FRONT VIEW	A- 12
Figure A- 20	POST-TEST MDB FRONT VIEW	A- 12
Figure A- 21	PRE-TEST MDB LEFT SIDE VIEW	A- 13
Figure A- 22	POST-TEST MDB LEFT SIDE VIEW	A- 13
Figure A- 23	PRE-TEST MDB RIGHT SIDE VIEW	A- 14
Figure A- 24	POST-TEST MDB RIGHT SIDE VIEW	A- 14
Figure A- 25	PRE-TEST MDB TOP VIEW	A- 15
Figure A- 26	POST-TEST MDB TOP VIEW	A- 15
Figure A- 27	PRE-TEST OVERHEAD VEHICLE AND MDB VIEW	A- 16
Figure A- 28	POST-TEST IMPACT TARGET VIEW	A- 16
Figure A- 29	PRE-TEST FRONT UNDERBODY VIEW	A- 17
Figure A- 30	POST-TEST FRONT UNDERBODY VIEW	A- 17
Figure A- 31	PRE-TEST MID UNDERBODY VIEW	A- 18
Figure A- 32	POST-TEST MID UNDERBODY VIEW	A- 18
Figure A- 33	PRE-TEST REAR UNDERBODY VIEW	A- 19
Figure A- 34	POST-TEST REAR UNDERBODY VIEW	A- 19
Figure A- 35	PRE-TEST FUEL FILLER CAP VIEW	A- 20
Figure A- 36	POST-TEST FUEL FILLER CAP VIEW	A- 20
Figure A- 37	IMPACT VIEW	A- 21
Figure A- 38	SPEED TRAP	A- 21
Figure A- 39	ROLLOVER 90° VIEW	A- 22
Figure A- 40	ROLLOVER 180° VIEW	A- 22
Figure A- 41	ROLLOVER 270° VIEW	A- 23
Figure A- 42	ROLLOVER 360° VIEW	A- 23



Figure A-1: Vehicle Certification Placard



Figure A-2: Vehicle Tire Placard

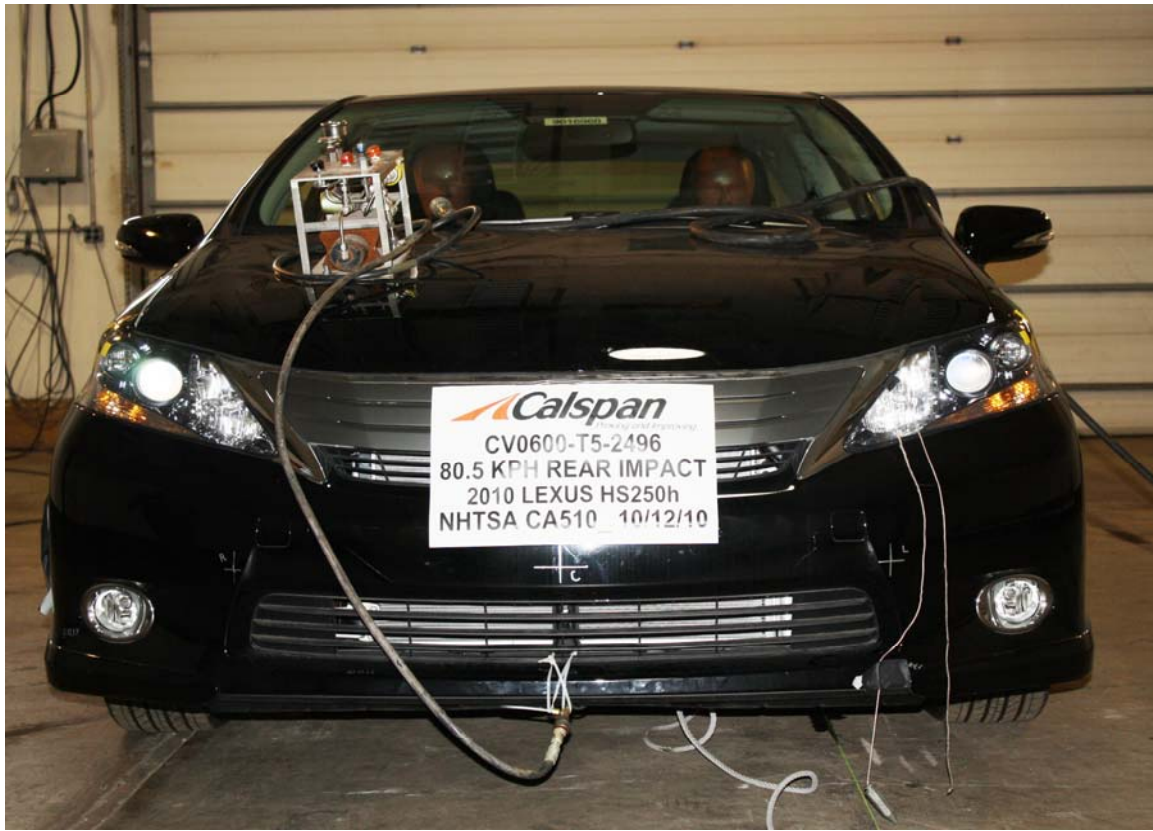


Figure A-3: Pre-Test Front View



Figure A-4: Post-Test Front View



Figure A-5: Pre-Test Left Side View



Figure A-6: Post-Test Left Side View



Figure A-7: Pre-Test Right Side View



Figure A-8: Post-Test Right Side View



Figure A-9: Pre-Test Left Front Three-Quarter View



Figure A-10: Post-Test Left Front Three-Quarter View



Figure A-11: Pre-Test Right Front Three-Quarter View

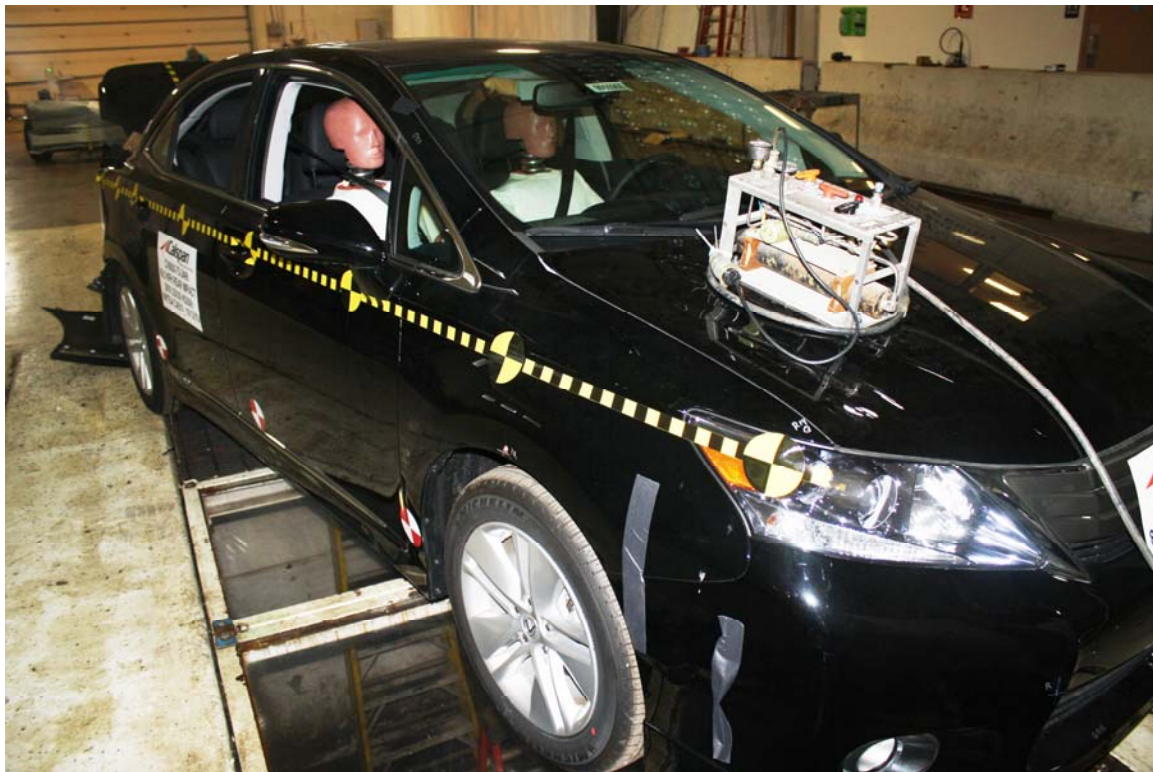


Figure A-12: Post-Test Right Front Three-Quarter View



Figure A-13: Pre-Test Left Rear Three-Quarter View



Figure A-14: Post-Test Left Rear Three-Quarter View



Figure A-15: Pre-Test Right Rear Three-Quarter View



Figure A-16: Post-Test Right Rear Three-Quarter View



Figure A-17: Pre-Test Rear View



Figure A-18: Post-Test Rear View



Figure A-19: Pre-Test MDB Front View



Figure A-20: Post-Test MDB Front View



Figure A-21: Pre-Test MDB Left Side View



Figure A-22: Post-Test MDB Left Side View



Figure A-23: Pre-Test MDB Right Side View



Figure A-24: Post-Test MDB Right Side View



Figure A-25: Pre-Test MDB Top View



Figure A-26: Post-Test MDB Top View



Figure A-27: Pre-Test Overhead Vehicle and MDB View



Figure A-28: Post-Test Impact Target View

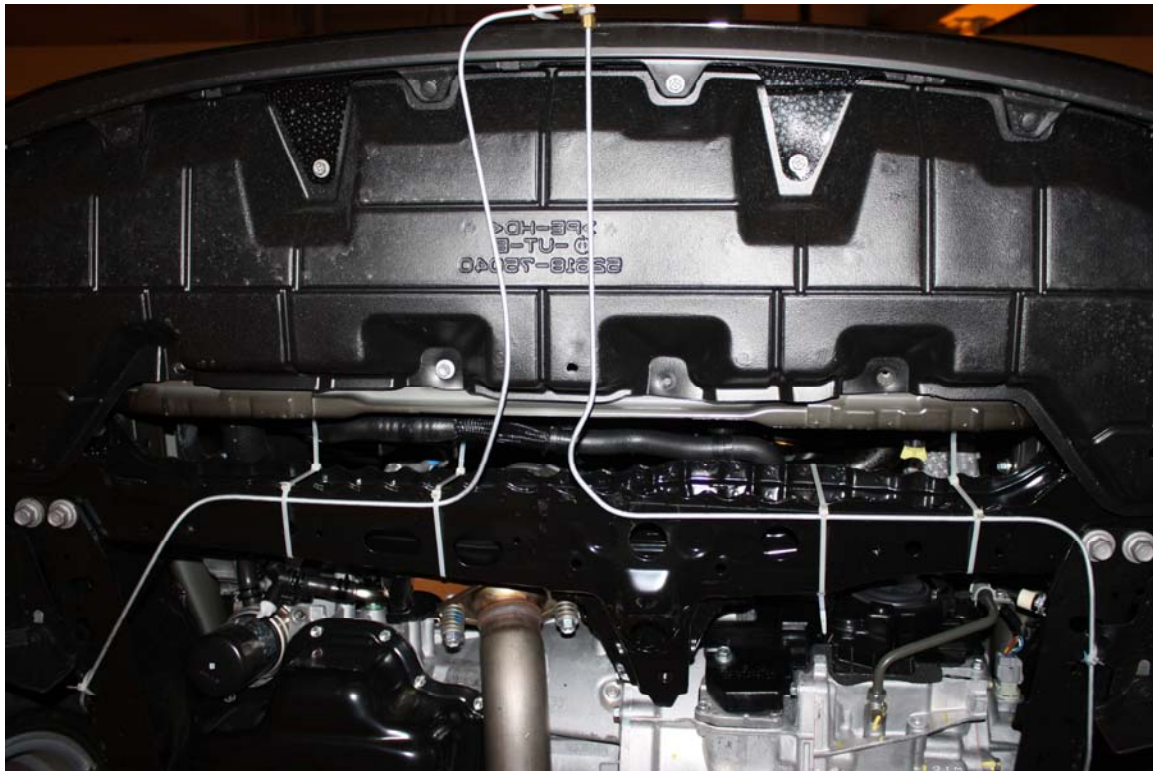


Figure A-29: Pre-Test Front Underbody View

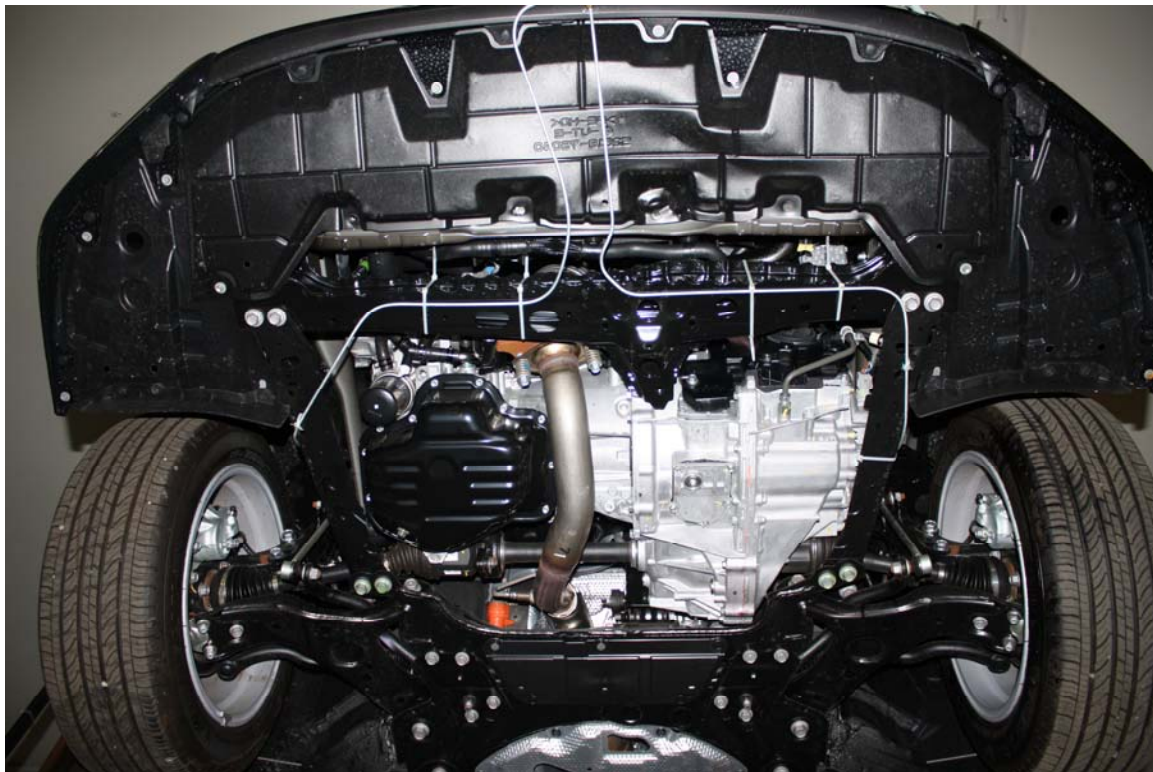


Figure A-30: Post-Test Front Underbody View



Figure A-31: Pre-Test Mid Underbody View

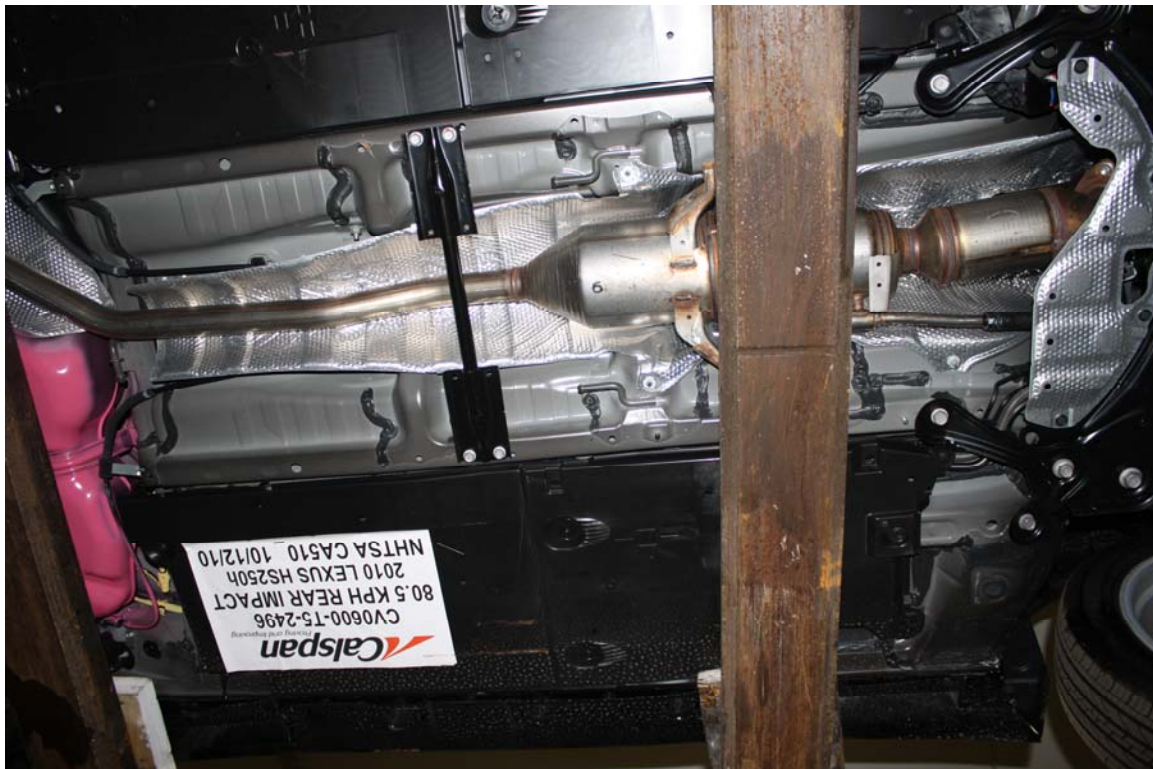


Figure A-32: Post-Test Mid Underbody View



Figure A-33:Pre-Test Rear Underbody View

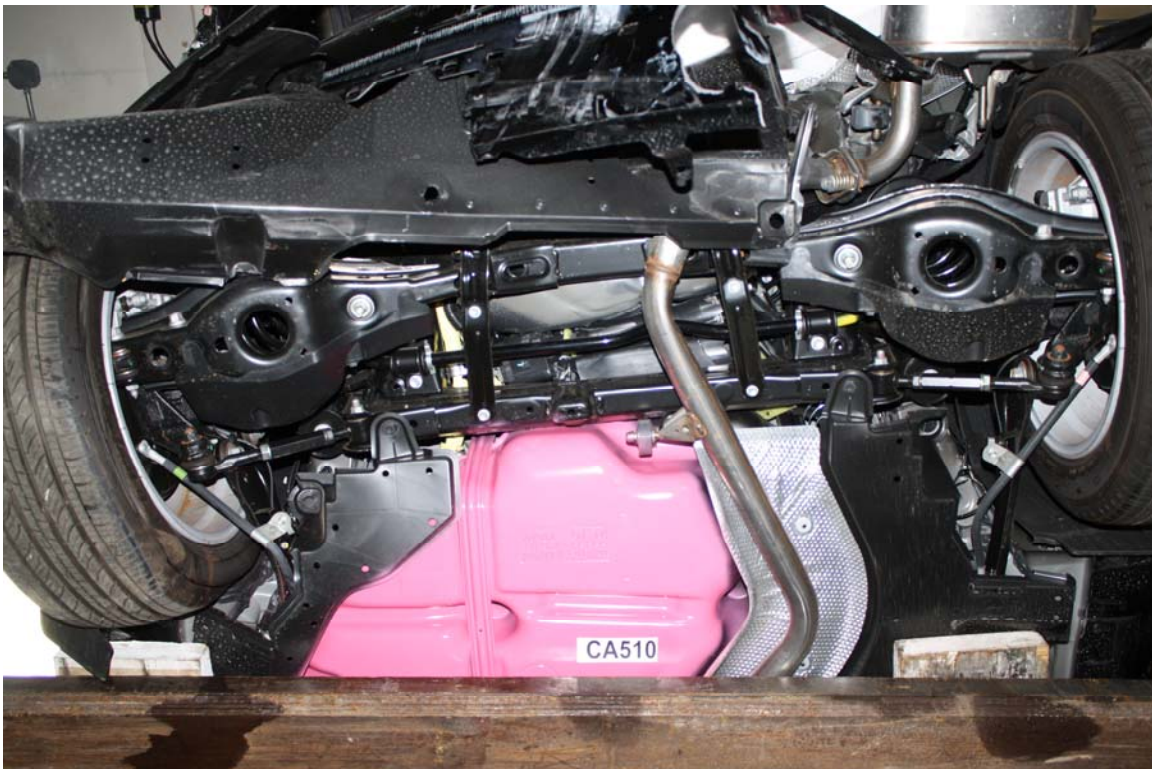


Figure A-34: Post-Test Rear Underbody View



Figure A-35: Pre-Test Fuel Filler Cap View



Figure A-36: Post-Test Fuel Filler Cap View



Figure A-37: Impact View



Figure A-38: Speed Trap Photo



Figure A-38: Rollover 90° View



Figure A-39: Rollover 180° View

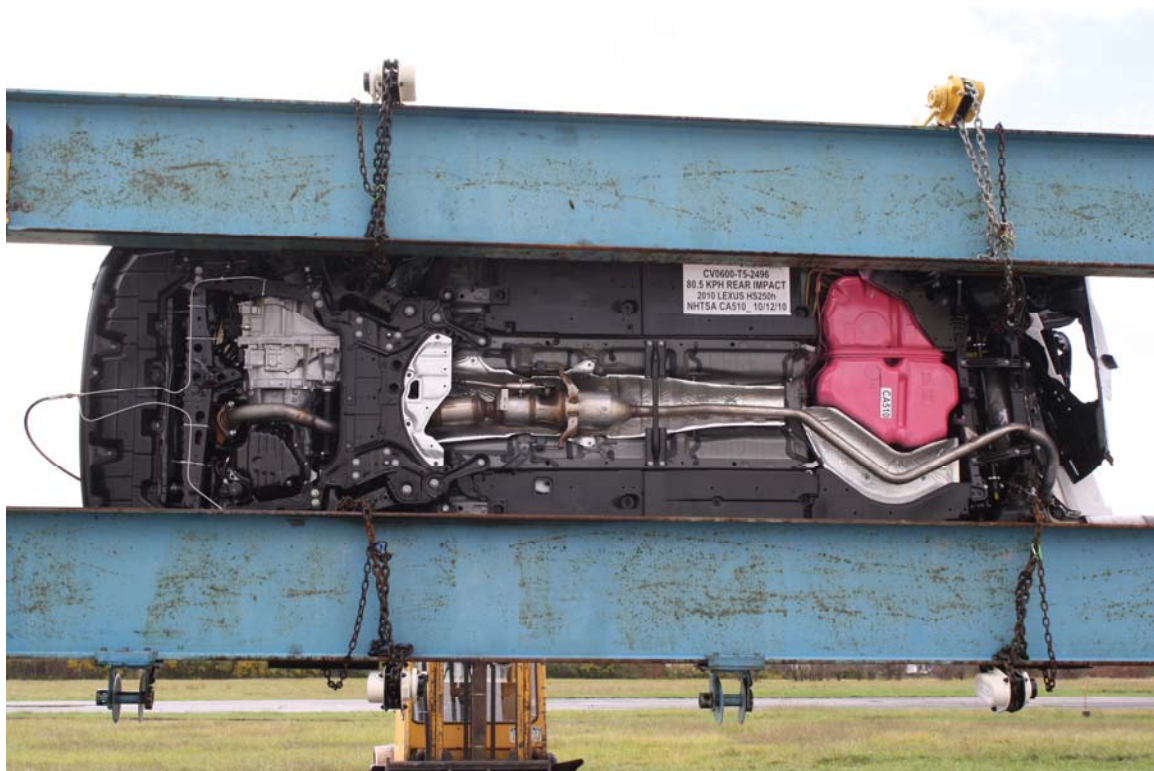


Figure A-40: Rollover 270° View



Figure A-41: Rollover 360° View