

REPORT NUMBER: 301-MGA-2010-003

**SAFETY COMPLIANCE TESTING FOR FMVSS 301R
FUEL SYSTEM INTEGRITY – REAR IMPACT**

**SUZUKI MOTOR CORPORATION
2010 SUZUKI KIZASHI SE
NHTSA NUMBER: CA0510**

**PREPARED BY:
MGA RESEARCH CORPORATION
5000 WARREN ROAD
BURLINGTON, WI 53105**



Test Date: July 8, 2010

Final Report Date: July 23, 2010

FINAL REPORT

**PREPARED FOR:
U.S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
ENFORCEMENT
OFFICE OF VEHICLE SAFETY COMPLIANCE
1200 NEW JERSEY AVENUE, S.E., NVS-220
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Safety Administration, in response to Contract Number DTNH22-06-C-00030.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: 
Joe Fleck, Project Engineer

Date: 7/21/2010

Reviewed by: 
David Winkelbauer, Facility Director

Date: 7/21/2010

FINAL REPORT ACCEPTED BY:

Edward E. Chan

Digitally signed by Edward E. Chan
DN: cn=Edward E. Chan, o=National Highway Traffic
Safety Administration, ou=Office of Vehicle Safety
Compliance, email=ed.chan@dot.gov, c=US
Date: 2010.07.23 15:10:56 -04'00'

COTR, Rear Impact

7/23/2010

Date of Acceptance

Technical Report Documentation Page

1. Report No. 301-MGA-2010-003	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle Final Report for Fuel System Integrity Test of a 2010 Suzuki Kizashi SE NHTSA No.: CA0510		5. Report Date July 21, 2010	
		6. Performing Organization Code MGA	
7. Author(s) Joe Fleck, Project Engineer		8. Performing Organization Report No. 301-MGA-2010-003	
9. Performing Organization Name and Address MGA Research Corporation 5000 Warren Road Burlington, WI 53105		10. Work Unit No.	
		11. Contract or Grant No. DTNH22-06-C-00030	
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Enforcement, Office of Vehicle Safety Compliance 1200 New Jersey Avenue, S.E., NVS-220 Washington, D.C. 20590		13. Type of Report and Period Covered Final Report 7/8/2009 – 7/23/2010	
		14. Sponsoring Agency Code NVS-220	
15. Supplementary Notes			
16. Abstract A rear impact was conducted on a 2010 Suzuki Kizashi SE at MGA Research Corporation on July 8, 2010. This test was conducted to obtain data indicant of FMVSS 301R. The impact velocity was 79.2 km/h. The ambient temperature at the time of impact was 28 degrees Celsius.			
17. Key Words Fuel System Integrity Test 2010 Suzuki Kizashi SE NHTSA No: CA0510		18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Admin., Technical Ref. Division, 1200 New Jersey Avenue, SE Washington, D.C. 20590	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 57	22. Price

TABLE OF CONTENTS

<u>Section</u>		<u>Page No</u>
1	Purpose and Summary of Test	1
2	Data Sheets	2
<u>Data Sheet No.</u>		<u>Page No.</u>
1	Test Vehicle Specifications	2
2	Pre-Test Data	4
3	Moving Barrier Data	6
4	Post-Test Data	7
5	Static Rollover Test Data	8
<u>Form No.</u>		
1	Test Vehicle Information	10
<u>Appendix</u>		
A	Photographs	A

SECTION 1

PURPOSE AND SUMMARY OF TEST

PURPOSE

This rear impact test is sponsored by the National Highway Traffic Safety Administration (NHTSA) under contract number DTNH22-06-C-00030. The purpose of this test is to reduce deaths and injuries occurring from fires that result from fuel spillage during and after motor vehicle crashes and resulting from ingestion of fuels during siphoning.

SUMMARY

A 2010 Suzuki Kizashi was impacted by a Moving Deformable Barrier (MDB) at a velocity of 79.2 km/h. The test was performed at MGA Research Corporation on July 8, 2010. Pre-and post-test photographs of the vehicle and dummies can be found in Appendix A.

One real-time camera and four high-speed cameras were used to document the impact event.

- Left Rear Half 1000 fps
- Right Rear Half 1000 fps
- Overhead Overall 1000 fps
- Left Overall 1000 fps
- Real Time Pan 30 fps

Two ballast Part 572E, 50th percentile male anthropomorphic test devices (ATDs) were placed in the driver and right-front passenger seating positions according to dummy placement instructions specified in the Laboratory Indicant Test Procedure.

There was no Stoddard Solvent leakage after the event or during any phase of the static rollover.

The vehicle appeared to comply with all the requirements of FMVSS No. 301 "Fuel System Integrity."

SECTION 2
DATA SHEETS

DATA SHEET NO. 1
TEST VEHICLE SPECIFICATIONS

Test Vehicle: 2010 Suzuki Kizashi NHTSA No.: CA0510
Test Program: FMVSS 301 Fuel System Integrity Test Date: 7/8/2010

TEST VEHICLE INFORMATION

Manufacturer	Suzuki Motor Corporation
Model	Kizashi
Body Style	Passenger Car
Major Options	None
NHTSA No.	CA0510
VIN	JS2RF9A39A6100007
Color	Deep Sea Blue Metallic
Delivery Date	6/17/2010
Odometer Reading (mile)	195
Dealer	West-Herr Suzuki
Transmission	Automatic
Final Drive	Four Wheel Drive
Number of Cylinders	4
Engine Displacement (L)	2.4
Engine Placement	Lateral

DATA FROM VEHICLE'S CERTIFICATION LABEL

Manufactured By	Suzuki Motor Corporation
Date of Manufacture	10/09

GVWR (kg)	2030
GAWR Front (kg)	1200
GAWR Rear (kg)	1100

VEHICLE CAPACITY DATA

Measured Parameter	Front	Rear	Third	Total
Type of Seats	Bucket	Bench		
Number of Occupants	2	3		5
Capacity Wt. (VCW) (kg)				400
Number of Occupants x 68 kg.				340
Cargo Wt. (RCLW) (kg)				60

DATA SHEET NO. 1 (continued)
TEST VEHICLE SPECIFICATIONS

Test Vehicle:	<u>2010 Suzuki Kizashi</u>	NHTSA No.:	<u>CA0510</u>
Test Program:	<u>FMVSS 301 Fuel System Integrity</u>	Test Date:	<u>7/8/2010</u>

DATA FROM VEHICLE'S TIRE PLACARD

Measured Parameter	Front	Rear
Maximum Tire Pressure (kPa)	350	350
Cold Pressure (kPa)	260	260
Recommended Tire Size	P215/55R17	P215/55R17
Recommended Load Range	93V	93V
Tire Size on Vehicle	P215/55R17	P215/55R17
Tire Manufacturer	Dunlop	Dunlop
Location of Placard of Vehicle	Door Sill	
Type of Spare Tire (full size/space saver)	Space Saver	

DATA SHEET NO. 2**PRE-TEST DATA**Test Vehicle: 2010 Suzuki KizashiNHTSA No.: CA0510Test Program: FMVSS 301 Fuel System IntegrityTest Date: 7/8/2010**WEIGHT OF TEST VEHICLE**

	Units	As Delivered (UVW) (Axle)			As Tested (ATW) (Axle)		
		Front	Rear	Total	Front	Rear	Total
Left	kg	476.3	324.3		521.2	381.9	
Right	kg	465.8	321.5		510.3	366.5	
Ratio	%	59.3	40.7		58.0	42.0	
Totals	kg	942.1	645.8	1587.9	1031.5	748.4	1779.9

CALCULATION OF TARGET TEST WEIGHT (TTW)

Measured Parameter	Units	Value
Total Delivered Weight (UVW)	kg	1587.9
Rated Cargo/Luggage Weight (RCLW)	kg	60
Weight of 2 P572E ATDs	kg	148
Calculated Vehicle Target Weight (TVTW)	kg	1795.9

Vehicle Wheelbase	2700 mm
Vehicle Width	1822 mm
Weight of Ballast Secured in Cargo Area	34.0 kg
Method of Securing Ballast	Ratchet Straps
Vehicle Components Removed for Weight Reduction	None

VEHICLE ATTITUDES

	Units	LF	RF	LR	RR
As Delivered	mm	703	711	713	706
As Tested	mm	691	692	690	699

DATA SHEET NO. 2 (continued)**PRE-TEST DATA**Test Vehicle: 2010 Suzuki KizashiNHTSA No.: CA0510Test Program: FMVSS 301 Fuel System IntegrityTest Date: 7/8/2010**FUEL SYSTEM DATA**

	Units: Liters
Usable Capacity of "Standard Tank" (Owner's Manual)	62.8
Usable Capacity Figure Furnished by COTR	62.8
Usable Capacity of "Optional" Tank	
92-94% of Usable Capacity	57.8 to 59.0
Actual Test Volume (entire fuel system filled)	58.4

Test Fluid Type	Stoddard Solvent
Test Fluid Kinematic Viscosity (centistokes)	2.1 cSt @ 20° C
Test Fluid Color	Purple
Type of Vehicle Fuel Pump	Electrical
Activate Electric Fuel Pump Operation with Ignition Switch ON, but Engine OFF	Yes

Comments (noticeable attributes of fuel system components, capacity, etc.)	None
--	------

DATA SHEET NO. 3
MOVING BARRIER DATA

Test Vehicle: 2010 Suzuki Kizashi NHTSA No.: CA0510
 Test Program: FMVSS 301 Fuel System Integrity Test Date: 7/8/2010

MOVING BARRIER'S TEST WEIGHT

	Units	Front	Rear	Total
Left	kg	374.2	308.8	
Right	kg	389.5	291.2	
Ratio	%	56.0	44.0	
Totals	kg	763.7	600.0	1363.7

Tires (Mfr, line, size)	Yokohama
Tire Pressure (kPa)	207
Brake Abort System (Yes/No)?	Yes
Date of Last Calibration	8/6/2008

DATA SHEET NO. 4**POST-TEST DATA**Test Vehicle: 2010 Suzuki KizashiNHTSA No.: CA0510Test Program: FMVSS 301 Fuel System IntegrityTest Date: 7/8/2010**IMPACT VELOCITY**

	Units: km/h
Required Impact Velocity	80.0
Actual Impact Velocity (Trap No. 1)	79.2
Actual Impact Velocity (Trap No. 2)	79.2
Average Impact Speed	79.2

Temperature at Time of Impact (°C)	28
Test Time	4:10 pm

WELDING ROD IMPACT POINT

	Units: mm
Vertical distance from target center (+ above target / - below target)	4 up
Horizontal distance from target center (+ to the right / - to the left)	9 left

DATA SHEET NO. 5


STATIC ROLLOVER TEST DATA

Test Vehicle: 2010 Suzuki Kizashi NHTSA No.: CA0510
 Test Program: FMVSS 301 Fuel System Integrity Test Date: 7/8/2010

STODDARD SOLVENT SPILLAGE MEASUREMENT

- A. From impact until vehicle motion ceases: 0 g
 (Maximum Allowable = 28 grams)
- B. For the 5 minute period after motion ceases: 0 g
 (Maximum Allowable = 28 grams)
- C. For the following 25 minutes: 0 g
 (Maximum Allowable = 28 grams/minute)
- D. Spillage: None

FMVSS 301 STATIC ROLLOVER DATA

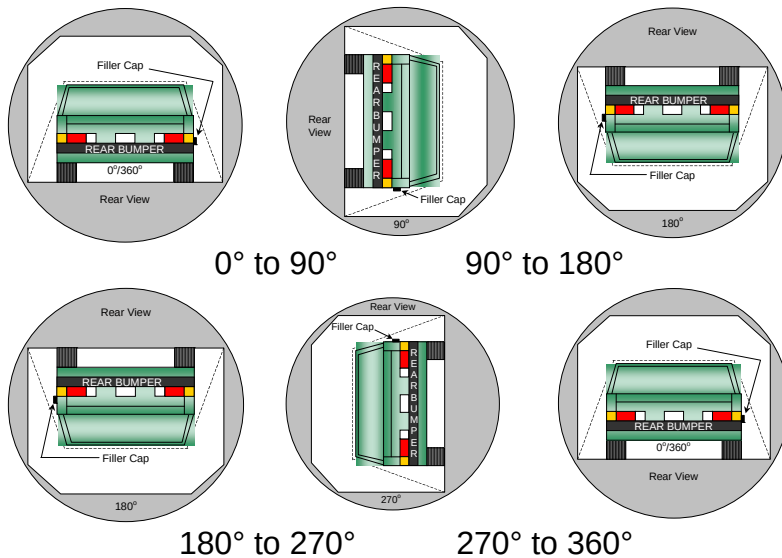

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.

2. The position hold time at each position is 300 seconds (minimum).

3. Details of Stoddard Solvent spillage locations: **Not Applicable**

DATA SHEET NO. 5 (continued)

STATIC ROLLOVER TEST DATA

Test Vehicle: 2010 Suzuki Kizashi

NHTSA No.: CA0510

Test Program: FMVSS 301 Fuel System Integrity

Test Date: 7/8/2010

STODDARD SOLVENT SPILLAGE MEASUREMENT

Hold Time = 5 minutes at all intervals

0° TO 90° Rotation Time (sec) = 116 sec

Test Phase	Spillage (g)	Spillage Details
First 5 minutes from onset of rotation	0	
Sixth minute from onset of rotation	0	
Seventh minute from onset of rotation	0	
Eight minute if required	N/A	

90° TO 180° Rotation Time (sec) = 110 sec

Test Phase	Spillage (g)	Spillage Details
First 5 minutes from onset of rotation	0	
Sixth minute from onset of rotation	0	
Seventh minute from onset of rotation	0	
Eight minute if required	N/A	

180° TO 270° Rotation Time (sec) = 106 sec

Test Phase	Spillage (g)	Spillage Details
First 5 minutes from onset of rotation	0	
Sixth minute from onset of rotation	0	
Seventh minute from onset of rotation	0	
Eight minute if required	N/A	

270° TO 360° Rotation Time (sec) = 109 sec

Test Phase	Spillage (g)	Spillage Details
First 5 minutes from onset of rotation	0	
Sixth minute from onset of rotation	0	
Seventh minute from onset of rotation	0	
Eight minute if required	N/A	


FORM 1
TEST VEHICLE INFORMATION

Test Vehicle: 2010 Suzuki Kizashi
Test Program: FMVSS 301 Fuel System Integrity

NHTSA No.: CA0510
Test Date: 7/8/2010

NORMAL DESIGN RIDING POSITION

The seatback angle for the driver seat at the test position is 3.0 degrees. The seat back angle for the passenger seat at the test position is 2.0 degrees.

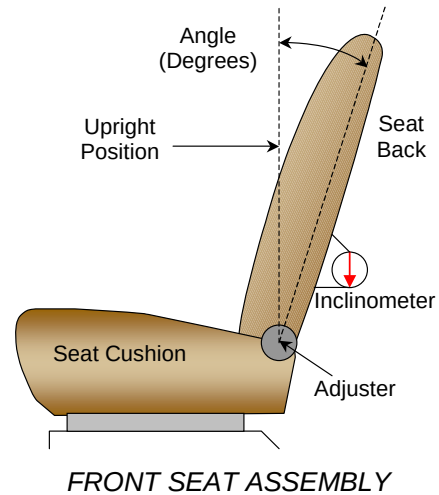

Driver Seat Back Angle	3.0° at headrest post
Passenger Seat Back Angle	3.0° at headrest post

SEAT FORE/AFT POSITIONING

	Total Fore/Aft Travel	Placed in Position #
Driver Seat	280 mm	140 mm
Passenger Seat	240 mm	120 mm

D-RING ADJUSTMENT

The driver and passenger D-rings were placed in the 1st position of 3, top as 0.

STEERING COLUMN ADJUSTMENT

The steering column was placed in the mid position.

APPENDIX A
PHOTOGRAPHS

TABLE OF PHOTOGRAPHS

	<u>Page No.</u>
Photo No. 1. Vehicle's Certification Label	A-1
Photo No. 2. Vehicle's Tire Placard	A-2
Photo No. 3. Pre-Test Front View of Vehicle	A-3
Photo No. 4. Post-Test Front View of Vehicle	A-4
Photo No. 5. Pre-Test Left Side View of Vehicle	A-5
Photo No. 6. Post-Test Left Side View of Vehicle	A-6
Photo No. 7. Pre-Test Left Rear Close-up View of Vehicle	A-7
Photo No. 8. Post-Test Left Rear Close-up View of Vehicle	A-8
Photo No. 9. Pre-Test Right Side View of Vehicle	A-9
Photo No. 10. Post-Test Right Side View of Vehicle	A-10
Photo No. 11. Pre-Test Right Rear Close-up View of Vehicle	A-11
Photo No. 12. Post-Test Right Rear Close-up View of Vehicle	A-12
Photo No. 13. Pre-Test Rear View of Vehicle	A-13
Photo No. 14. Post-Test Rear View of Vehicle	A-14
Photo No. 15. Pre-Test $\frac{3}{4}$ Frontal View From Right Side of Vehicle	A-15
Photo No. 16. Post-Test $\frac{3}{4}$ Frontal View From Right Side of Vehicle	A-16
Photo No. 17. Pre-Test $\frac{3}{4}$ Rear View From Right Side of Vehicle	A-17
Photo No. 18. Post-Test $\frac{3}{4}$ Rear View From Right Side of Vehicle	A-18
Photo No. 19. Pre-Test $\frac{3}{4}$ Rear View From Left Side of Vehicle	A-19
Photo No. 20. Post-Test $\frac{3}{4}$ Rear View From Left Side of Vehicle	A-20
Photo No. 21. Pre-Test Impact Point	A-21
Photo No. 22. Post-Test Impact Point	A-22
Photo No. 23. Pre-Test Underbody View 1	A-23
Photo No. 24. Post-Test Underbody View 1	A-24
Photo No. 25. Pre-Test Underbody View 2	A-25
Photo No. 26. Post-Test Underbody View 2	A-26
Photo No. 27. Pre-Test Underbody View 3	A-27

Page No.

Photo No. 28.	Post-Test Underbody View 3	A-28
Photo No. 29.	Pre-Test Front View of MDB	A-29
Photo No. 30.	Post-Test Front View of MDB	A-30
Photo No. 31.	Pre-Test $\frac{3}{4}$ Right Side View of MDB	A-31
Photo No. 32.	Post-Test $\frac{3}{4}$ Right Side View of MDB	A-32
Photo No. 33.	Pre-Test $\frac{3}{4}$ Left Side View of MDB	A-33
Photo No. 34.	Post-Test $\frac{3}{4}$ Left Side View of MDB	A-34
Photo No. 35.	Pre-Test Top View of MDB	A-35
Photo No. 36.	Post-Test Top View of MDB	A-36
Photo No. 37.	Static Rollover at 90 Degrees	A-37
Photo No. 38.	Static Rollover at 180 Degrees	A-38
Photo No. 39.	Static Rollover at 270 Degrees	A-39
Photo No. 40.	Static Rollover at 360 Degrees	A-40

MFD BY SUZUKI MOTOR CORPORATION JAPAN

DATE	GVWR	GAWR FRT	GAWR RR
	4475LB	2646LB	2425LB
10/09	2030KG	1200KG	1100KG

THIS VEHICLE CONFORMS TO ALL
APPLICABLE FEDERAL MOTOR
VEHICLE SAFETY, BUMPER AND
THEFT PREVENTION STANDARDS
IN EFFECT ON THE DATE OF
MANUFACTURE SHOWN ABOVE.

JS2RF9A39A6100007 PASS CAR
2.4L 4WD US

Vehicle's Certification Label



TIRE AND LOADING INFORMATION

SEATING CAPACITY, TOTAL 5, FRONT 2, REAR 3

The combined weight of occupants and cargo should never exceed 400 kg or 882 lbs.

TIRE	ORIGINAL TIRE SIZE	COLD TIRE PRESSURE
FRONT	P215/55R17	260 KPA, 38 PSI
REAR	P215/55R17	260 KPA, 38 PSI
SPARE	T145/90D16	420 KPA, 60 PSI

**SEE OWNER'S
MANUAL FOR
ADDITIONAL
INFORMATION**

79161-57LB

Vehicle's Tire Placard



Pre-Test Front View of Vehicle

A-4.



Post-Test Front View of Vehicle



Pre-Test Left Side View of Vehicle



Post-Test Left Side View of Vehicle



Pre-Test Left Rear Close-up View of Vehicle



Post-Test Left Rear Close-up View of Vehicle



Pre-Test Right Side View of Vehicle

A-10.



Post-Test Right Side View of Vehicle



Pre-Test Right Rear Close-up View of Vehicle



Post-Test Right Rear Close-up View of Vehicle

A-13.



Pre-Test Rear View of Vehicle



Post-Test Rear View of Vehicle



Pre-Test ¾ Frontal View From Right Side of Vehicle



Post-Test $\frac{3}{4}$ Frontal View From Right Side of Vehicle



Pre-Test ¾ Rear View From Right Side of Vehicle



Post-Test $\frac{3}{4}$ Rear View From Right Side of Vehicle



Pre-Test $\frac{3}{4}$ Rear View From Left Side of Vehicle




Post-Test ¾ Rear View From Left Side of Vehicle




Pre-Test Impact Point



Post-Test Impact Point

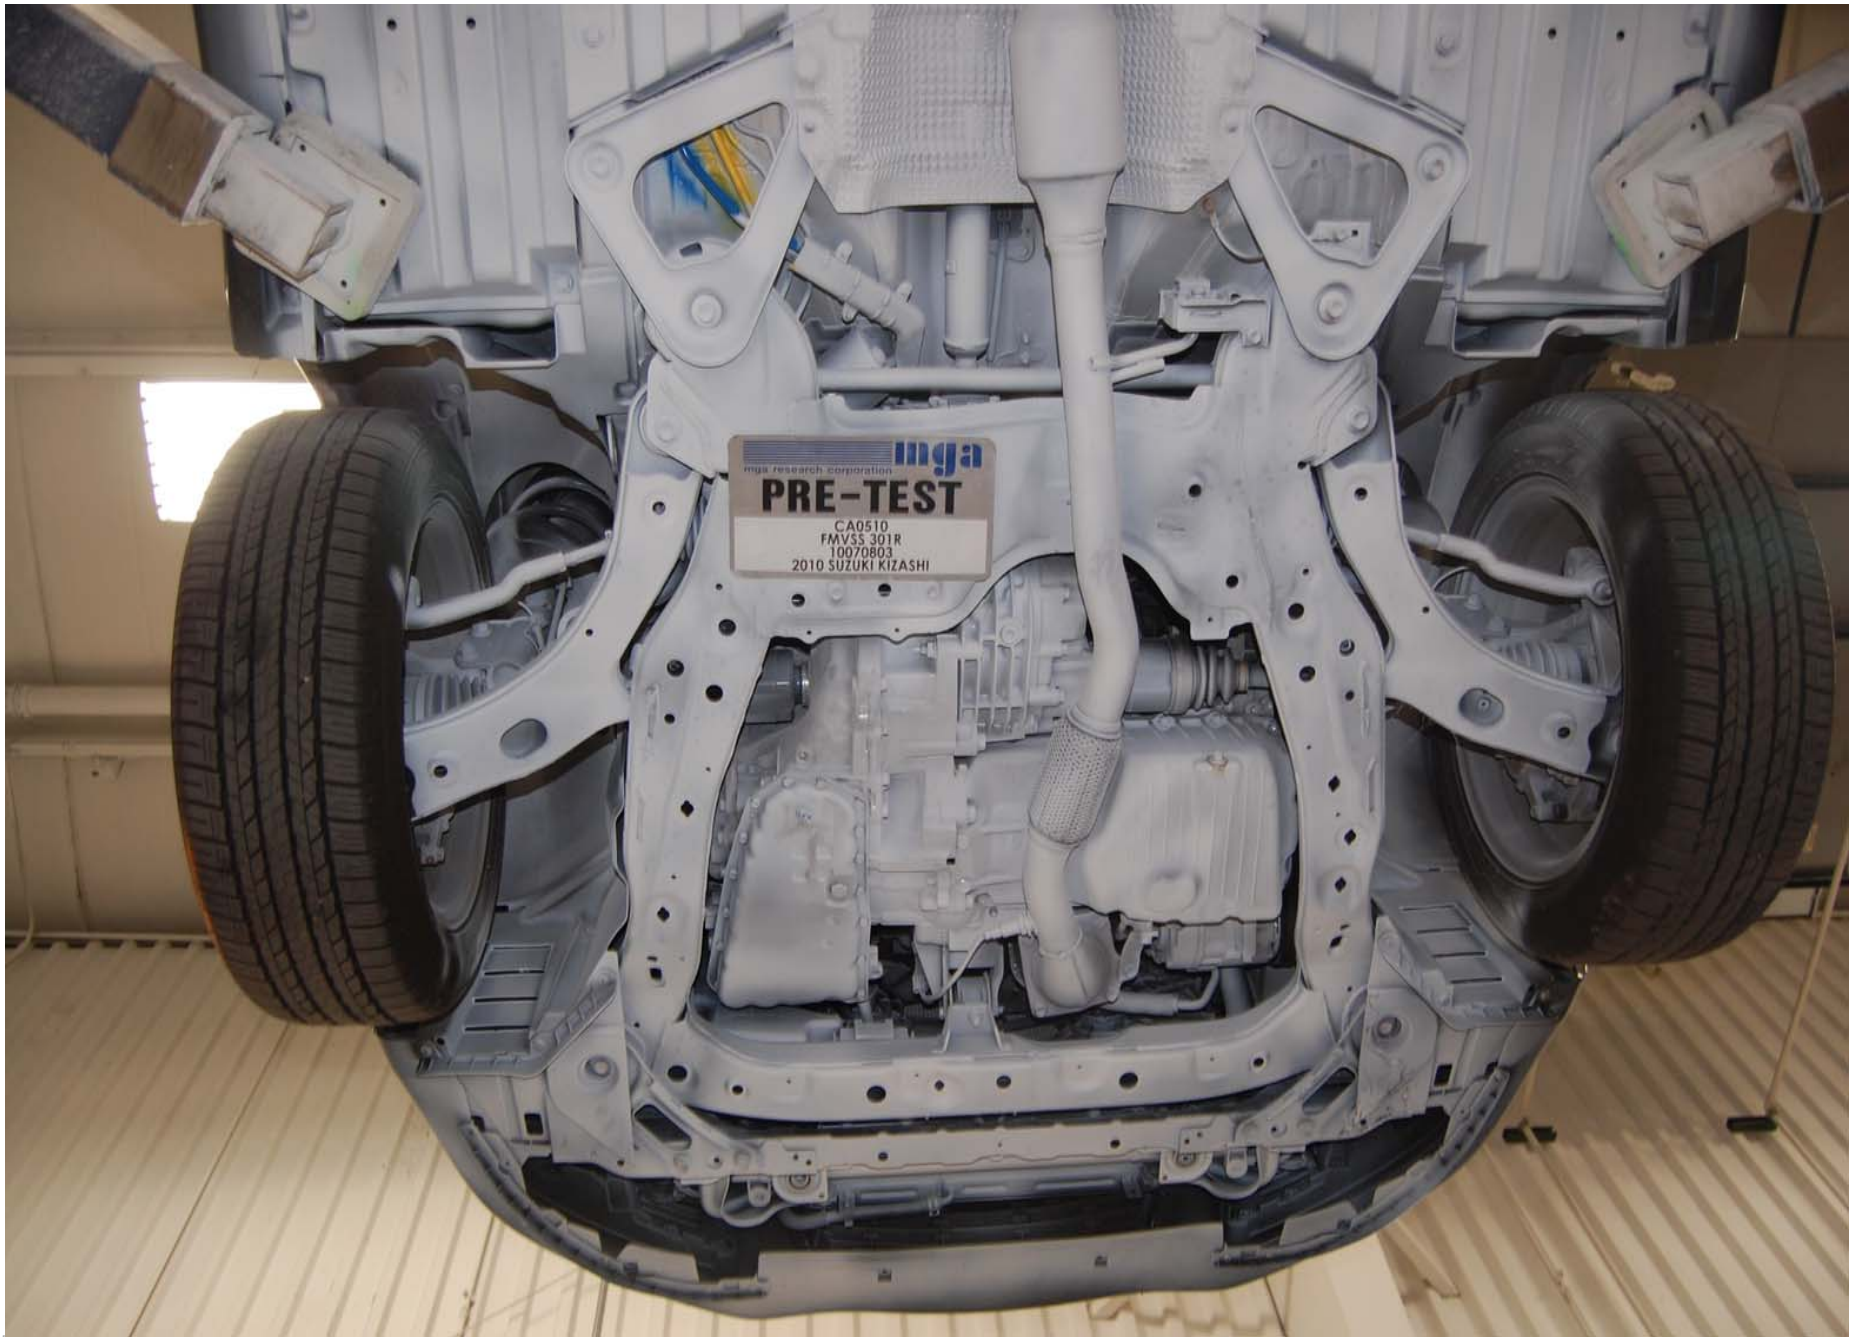

Pre-Test Underbody View 1

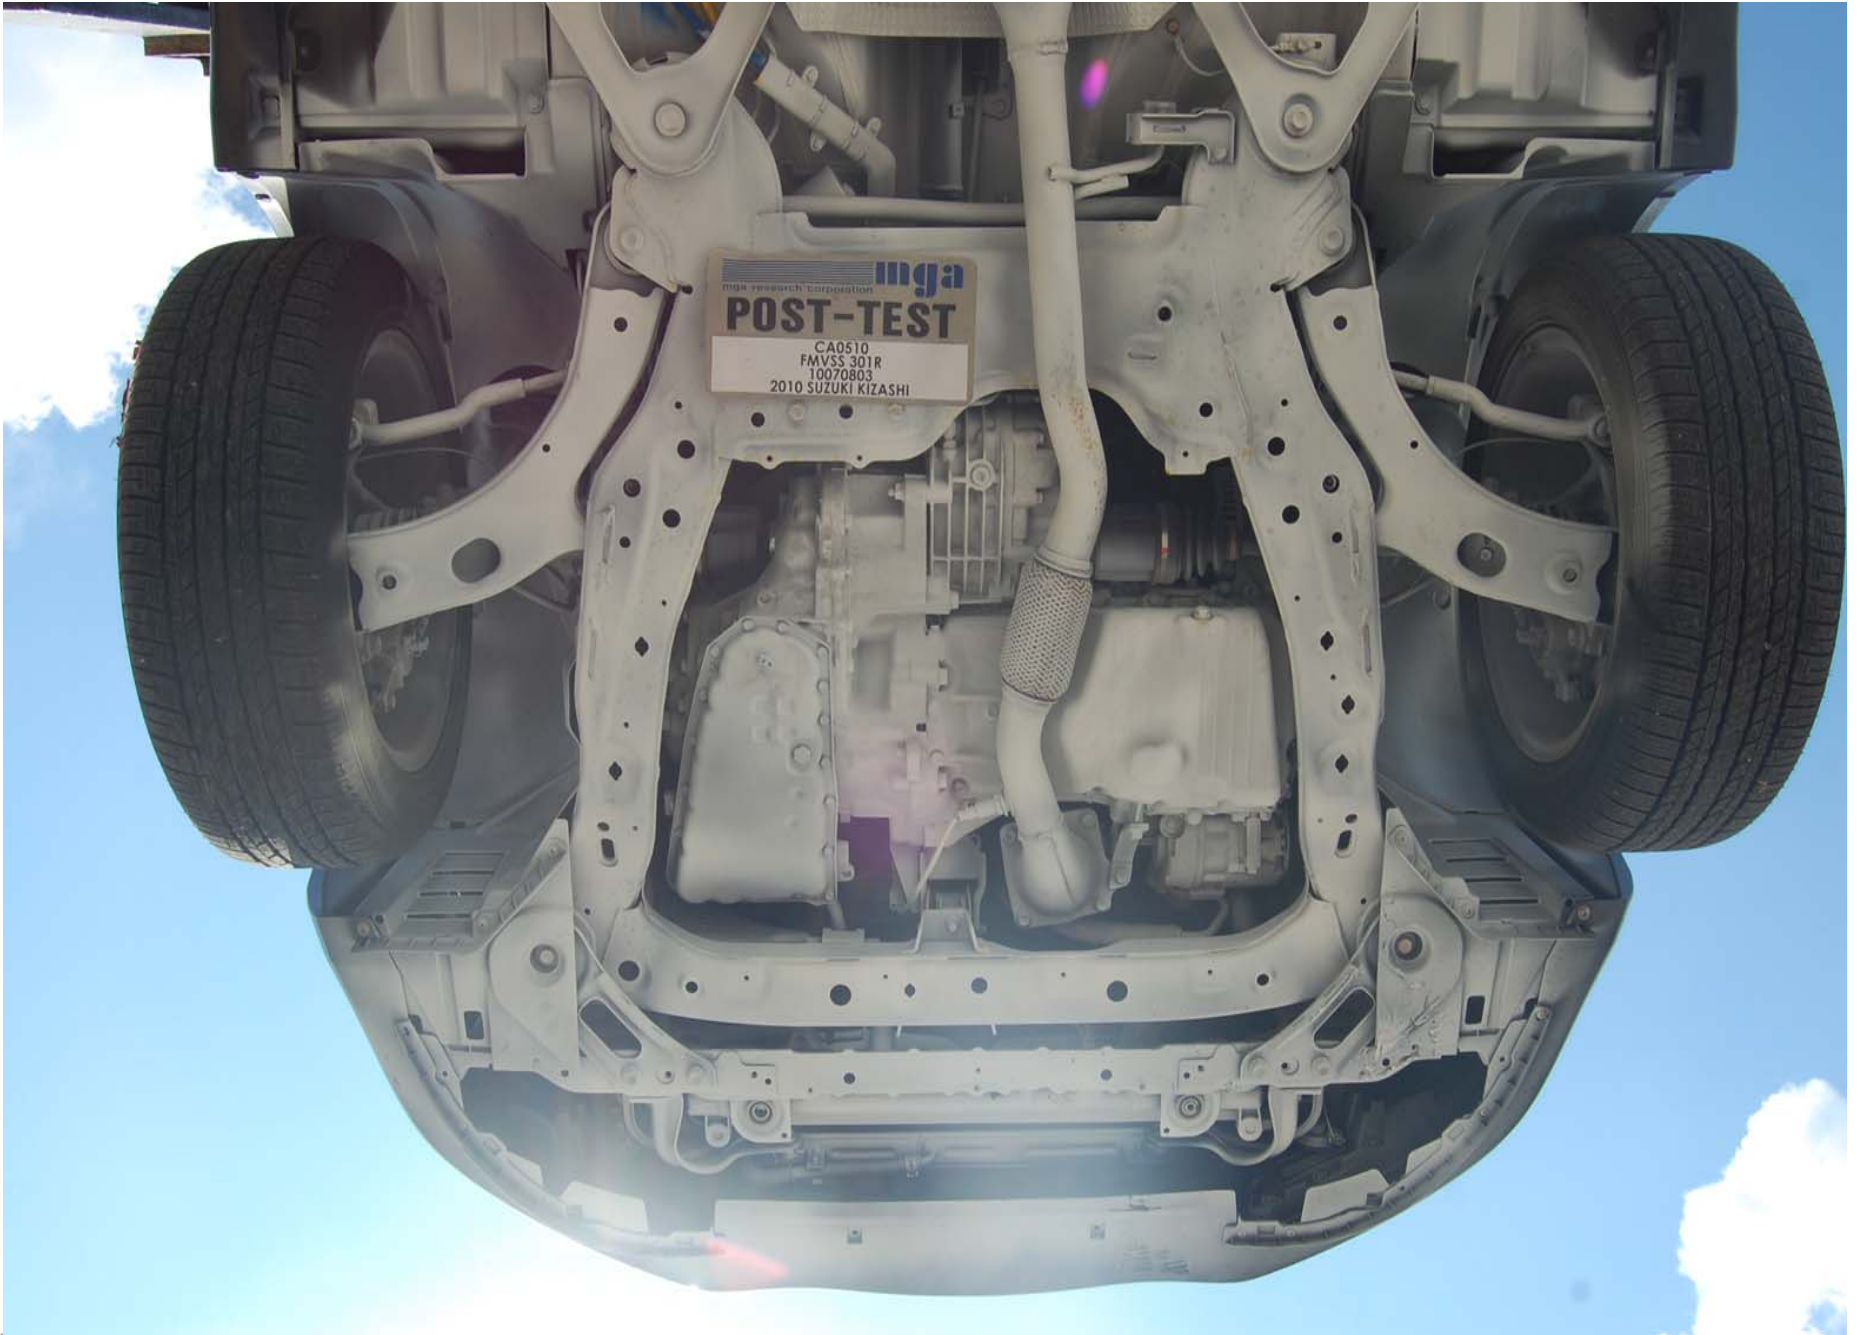

Post-Test Underbody View 1



Pre-Test Underbody View 2

A-26.



Post-Test Underbody View 2




Pre-Test Underbody View 3



Post-Test Underbody View 3



Pre-Test Front View of MDB

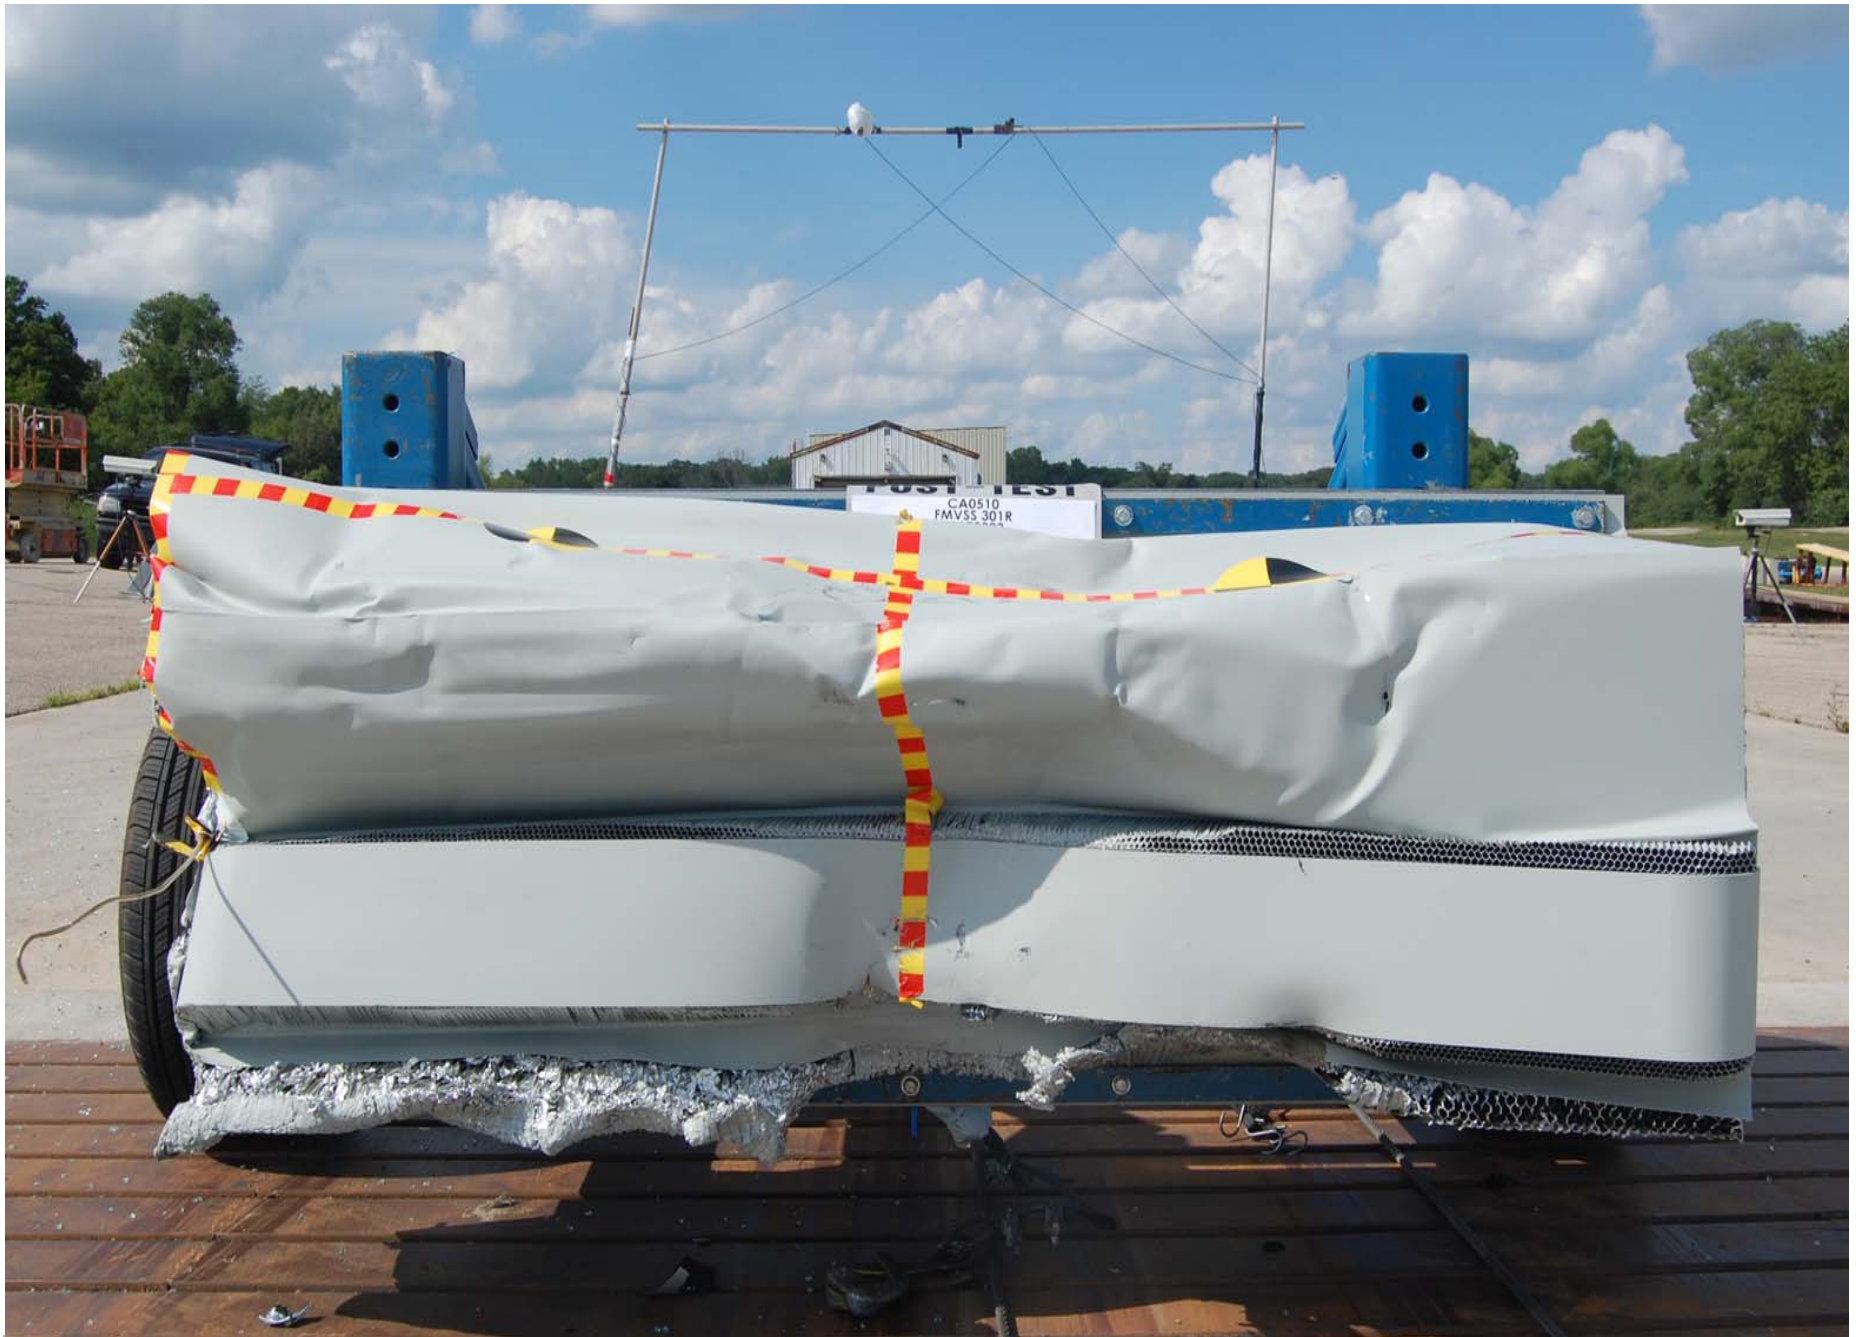

Post-Test Front View of MDB



Pre-Test $\frac{3}{4}$ Right Side View of MDB



Post-Test $\frac{3}{4}$ Right Side View of MDB



Pre-Test ¾ Left Side View of MDB




Post-Test $\frac{3}{4}$ Left Side View of MDB



Pre-Test Top View of MDB



Post-Test Top View of MDB

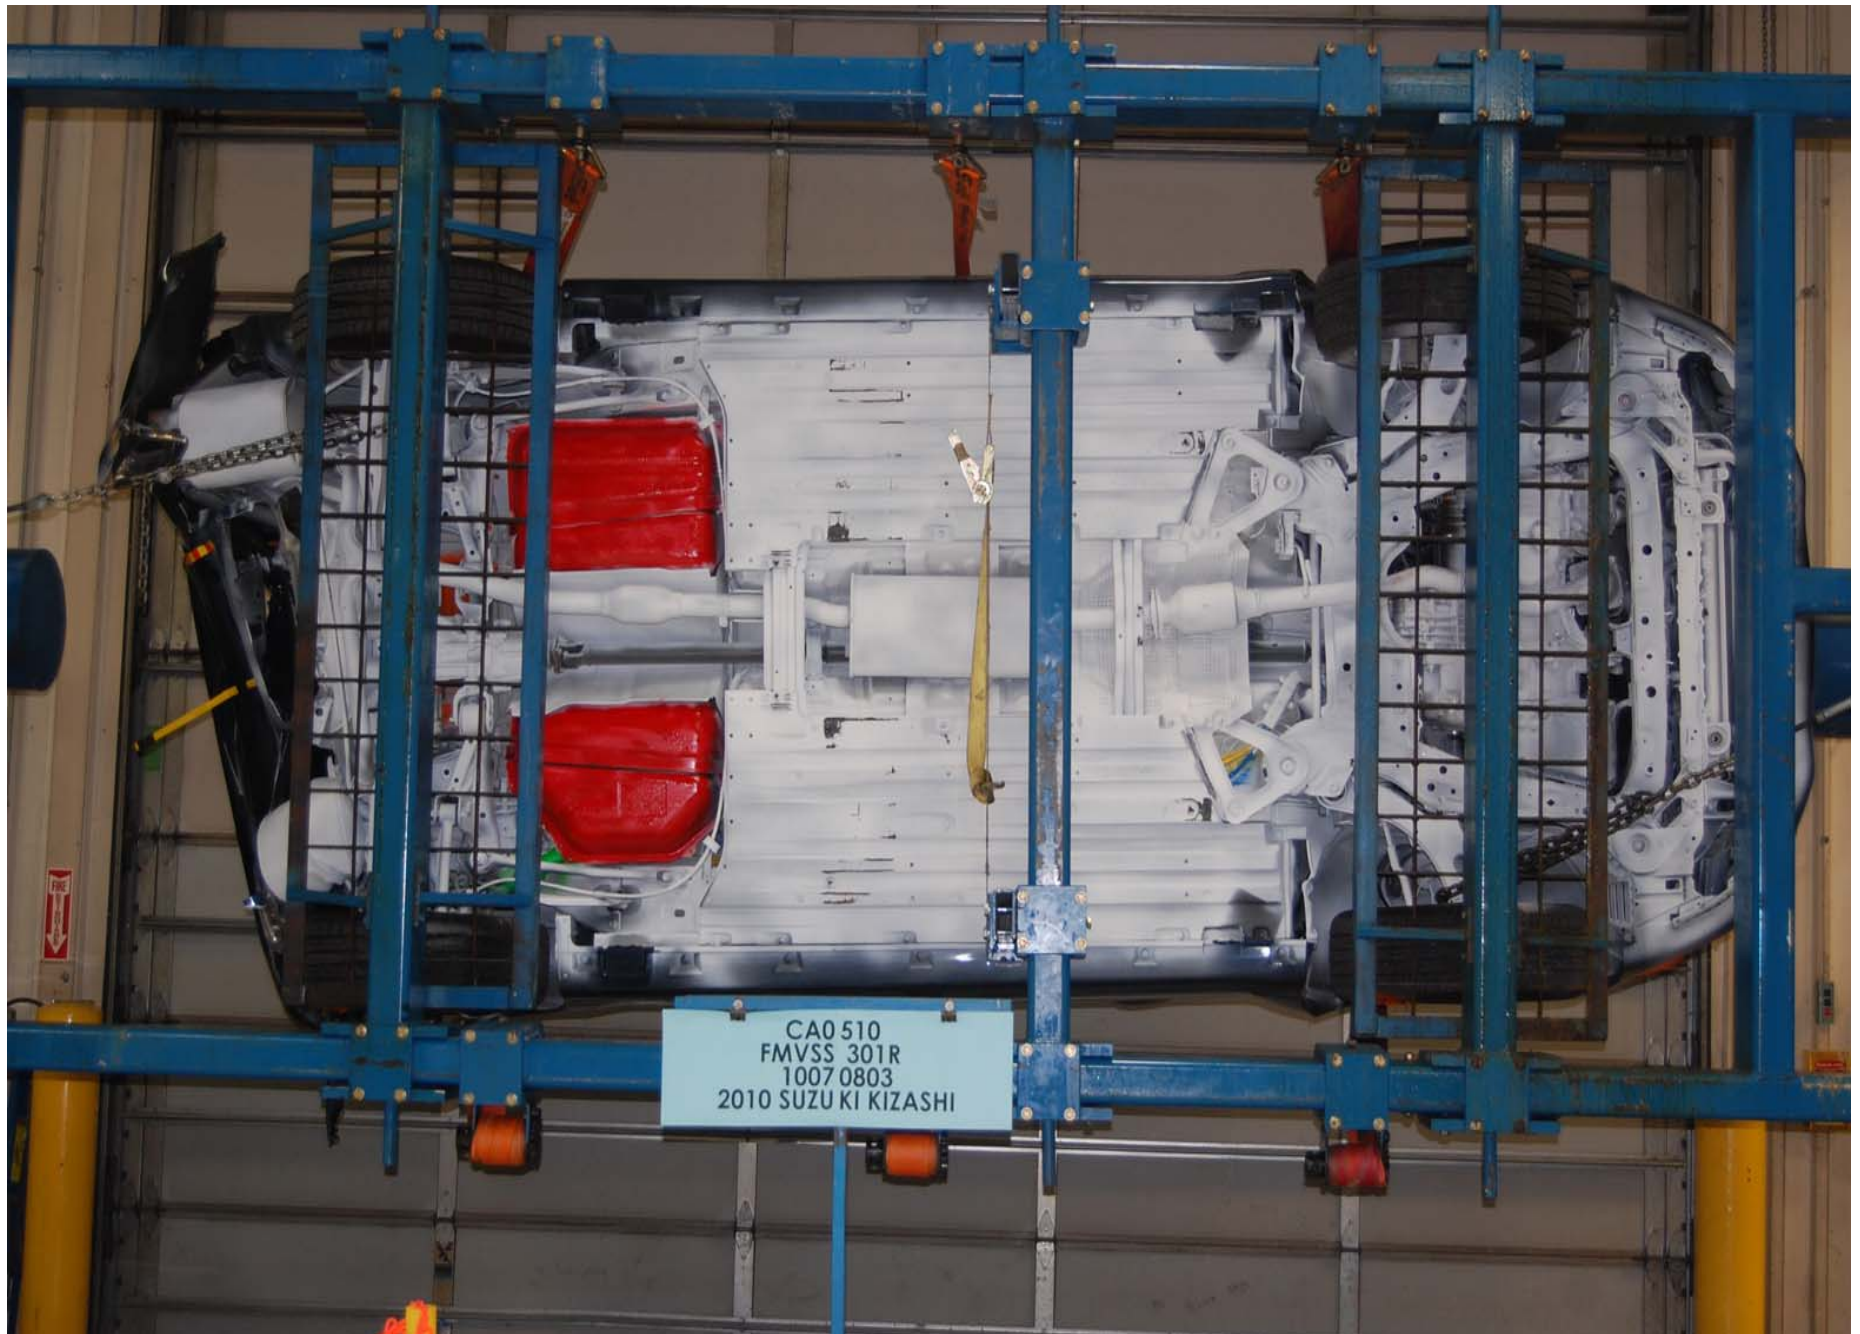

Static Rollover at 90 Degrees



Static Rollover at 180 Degrees



Static Rollover at 270 Degrees



Static Rollover at 360 Degrees