

**REPORT NUMBER: SINCAP-CAL-17-003**

**NEW CAR ASSESSMENT PROGRAM (NCAP)  
MOVING DEFORMABLE BARRIER SIDE IMPACT TEST**

**Mazda Motor Manufacturing de Mexico S.A. de C.V.  
2017 Toyota Yaris iA  
Four Door Sedan**

**NHTSA No: M20175109**

**PREPARED BY:  
CALSPAN CORPORATION  
P.O. BOX 400  
BUFFALO, NEW YORK 14225**



**January 3, 2017**

**FINAL REPORT**

**PREPARED FOR:  
U.S. DEPARTMENT OF TRANSPORTATION  
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION  
OFFICE OF CRASHWORTHINESS STANDARDS  
MAIL CODE: NRM-110  
1200 NEW JERSEY AVE SE, ROOM W43-410  
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Administration, in response to Contract Number DTNH22-14-D-00352.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof.

If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: Vanessa Hansen  
Vanessa Hansen, Project Engineer

Date: January 3, 2017

Approved by: Edward Dutton  
Edward Dutton, Test Engineer  
Transportation Test Operations

Date: January 3, 2017

**FINAL REPORT ACCEPTANCE BY OCWS:**

\_\_\_\_\_  
Division Chief, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date: \_\_\_\_\_

\_\_\_\_\_  
COTR, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date: \_\_\_\_\_

## TECHNICAL REPORT DOCUMENTATION PAGE

<b>1. Report No.</b> SINCAP-CAL-17-003	<b>2. Government Accession No.</b>	<b>3. Recipient's Catalog No.</b>																												
<b>4. Title and Subtitle</b> Final Report of New Car Assessment Program Side Impact MDB Testing of a 2017 Toyota Yaris iA four door sedan NHTSA No.: M20175109		<b>5. Report Date</b> January 3, 2017																												
		<b>6. Performing Organization Code</b> CAL																												
Vanessa Hansen, Test Engineer Edward Dutton, Senior Test Engineer		<b>8. Performing Organization Report No.</b> CAL-DOT-2017-003																												
<b>9. Performing Organization Name and Address</b> Calspan Corporation Transportation Test Operations P.O. Box 400 Buffalo, New York 14225		<b>10. Work Unit No.</b>																												
		<b>11. Contract or Grant No.</b> DTNH22-14-D-00352																												
<b>12. Sponsoring Agency Name and Address</b> U.S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards (NRM-110) 1200 New Jersey Ave., SE, Room W43-410 Washington, D.C. 20590		<b>13. Type of Report and Period Covered:</b> Final Test Report November 10, 2016 - January 3, 2017																												
		<b>14. Sponsoring Agency Code</b> NRM-110																												
<b>15. Supplementary Notes</b>																														
<b>16. Abstract</b> <p>A 55/28, (61.90kph / 38.5 mph), 90° Moving Deformable Barrier NCAP Side Impact Test was conducted on the subject 2017 Toyota Yaris iA four door sedan in accordance with the specifications of the Office of Crashworthiness Standards Test Procedure for the generation of consumer information on vehicle side crash protection. This test was conducted at Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on November 10, 2016.</p> <p>The impact velocity of the Moving Deformable Barrier (MDB) was 62.07 km/h, and the ambient temperature at the struck (driver's) side of the target vehicle at the time of impact was 21°C. The target vehicle's maximum post-test static crush was 123 mm located at level 2. The test vehicle's occupant performance data is as follows:</p>																														
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2" style="width: 55%;">Measurement Description</th> <th colspan="3" style="text-align: center;">Driver ATD (ES-2re)</th> </tr> <tr> <th style="width: 10%;">Units</th> <th style="width: 10%;">IARV</th> <th style="width: 10%;">Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC<sub>36</sub>)</td> <td>N/A</td> <td>1000</td> <td style="background-color: yellow;">247.226</td> </tr> <tr> <td>Maximum Thoracic Rib Deflection</td> <td>mm</td> <td>44</td> <td style="background-color: yellow;">25.955</td> </tr> <tr> <td>Total Abdominal Force</td> <td>N</td> <td>2500</td> <td style="background-color: yellow;">1089.460</td> </tr> <tr> <td>Pubic Symphysis Force</td> <td>N</td> <td>6000</td> <td style="background-color: yellow;">1705.034</td> </tr> </tbody> </table>				Measurement Description	Driver ATD (ES-2re)			Units	IARV	Result	Head Injury Criteria (HIC <sub>36</sub> )	N/A	1000	247.226	Maximum Thoracic Rib Deflection	mm	44	25.955	Total Abdominal Force	N	2500	1089.460	Pubic Symphysis Force	N	6000	1705.034				
Measurement Description	Driver ATD (ES-2re)																													
	Units	IARV	Result																											
Head Injury Criteria (HIC <sub>36</sub> )	N/A	1000	247.226																											
Maximum Thoracic Rib Deflection	mm	44	25.955																											
Total Abdominal Force	N	2500	1089.460																											
Pubic Symphysis Force	N	6000	1705.034																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2" style="width: 55%;">Measurement Description</th> <th colspan="3" style="text-align: center;">Passenger ATD (SID-IIs)</th> </tr> <tr> <th style="width: 10%;">Units</th> <th style="width: 10%;">IARV</th> <th style="width: 10%;">Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC<sub>36</sub>)</td> <td>N/A</td> <td>1000</td> <td style="background-color: yellow;">394.354</td> </tr> <tr> <td>Lower Spine Resultant Acceleration</td> <td>G</td> <td>82</td> <td style="background-color: yellow;">74.804</td> </tr> <tr> <td>Total Pelvic Force (sum of acetabular and iliac forces)</td> <td>N</td> <td>5525</td> <td style="background-color: yellow;">2756.315</td> </tr> <tr> <td>Maximum Thoracic Rib Deflection</td> <td>mm</td> <td>38*</td> <td style="background-color: yellow;">36.525</td> </tr> <tr> <td>Maximum Abdominal Rib Deflection</td> <td>mm</td> <td>45*</td> <td style="background-color: yellow;">36.776</td> </tr> </tbody> </table>				Measurement Description	Passenger ATD (SID-IIs)			Units	IARV	Result	Head Injury Criteria (HIC <sub>36</sub> )	N/A	1000	394.354	Lower Spine Resultant Acceleration	G	82	74.804	Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	2756.315	Maximum Thoracic Rib Deflection	mm	38*	36.525	Maximum Abdominal Rib Deflection	mm	45*	36.776
Measurement Description	Passenger ATD (SID-IIs)																													
	Units	IARV	Result																											
Head Injury Criteria (HIC <sub>36</sub> )	N/A	1000	394.354																											
Lower Spine Resultant Acceleration	G	82	74.804																											
Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	2756.315																											
Maximum Thoracic Rib Deflection	mm	38*	36.525																											
Maximum Abdominal Rib Deflection	mm	45*	36.776																											
<p>* Proposed IARV</p> <p>The two doors on the struck side of the vehicle did not separate from the body at the hinges or latches and the opposite doors did not open during the side impact event.</p>																														
<b>17. Key Words</b> New Car Assessment Program (NCAP) Side Impact MDB ES-2re SID-IIs		<b>18. Distribution Statement</b> <u>Copies of this report are available from:</u> National Highway Traffic Safety Administration Technical Information Services Division, NPO-411 1200 New Jersey Ave. SE Washington, D.C. 20590 e-mail: <a href="mailto:tis@nhtsa.dot.gov">tis@nhtsa.dot.gov</a> FAX: 202-493-2833																												
<b>19. Security Class. (of this report)</b>  UNCLASSIFIED	<b>20. Security Class. (of this page)</b>  UNCLASSIFIED	<b>21. No. of Pages</b>  188	<b>22. Price</b>																											

## TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
1	Test Purpose and Procedure	1-1
2	Summary of Test Results	2-1
3	Occupant and Vehicle Information	3-1
 <u>Data Sheet</u>		 <u>Page</u>
1	General Test and Vehicle Parameter Data	3-2
2	Seat, Seat Belt, Steering Wheel Adjustment and Fuel System Data	3-6
3	Dummy Longitudinal Clearance Dimensions	3-11
4	Dummy Lateral Clearance Dimensions	3-12
5	Camera and Instrumentation Data	3-13
6	Test Vehicle Accelerometer Locations	3-14
7	MDB Accelerometer Locations	3-15
8	Post-Test Observations	3-16
9	MDB Summary of Results	3-18
10	Test Vehicle Profile Measurements	3-19
11	Test Vehicle Exterior Crush Measurements	3-20
12	MDB Exterior Static Crush Measurements	3-23
13	FMVSS No. 301 Static Rollover Results	3-24
14	Dummy/Vehicle Temperature and Humidity Stabilization Data	3-25
 <u>Appendix</u>		 <u>Page</u>
A	Photographs	A-1
B	Vehicle and Dummy Response Data Plots	B-1
C	Dummy Configuration and Performance Verification Data	C-1
D	Test Equipment and Instrumentation Calibration Data	D-1

## **SECTION 1**

### **TEST PURPOSE AND PROCEDURE**

This moving deformable barrier side impact test is part of the MY 2017 New Car Assessment Program Side Impact Test Program, sponsored by the National Highway Traffic Safety Administration (NHTSA), under contract number DTNH22-14-D-00352. The purpose of this test is to generate comparative side impact performance in a 2017 Toyota Yaris iA four door sedan. The side impact test was conducted in accordance with the Office of Crashworthiness Standard's Laboratory Test Procedure dated October 2015.

## SECTION 2

### SUMMARY OF TEST RESULTS

A 2017 Toyota Yaris iA four door sedan was impacted on the left (driver's) side by a Moving Deformable Barrier (MDB) which was moving forward in a 27° crabbed position to the tow road guidance system at a velocity of 62.07 km/h. The target vehicle was stationary and was positioned at an angle of 63° to the line of forward motion. The side impact test was conducted by the Calspan Corporation's Transportation Test Operations Center in Buffalo, New York on November 10, 2016. Pre-test and post-test photographs of the test vehicle, the MDB and the dummies (ES-2re and SID-IIs) are included in this report.

Dummies were placed in the driver and left rear designated seating positions according to instructions specified in the OCWS Side Impact Laboratory Test Procedure, dated October 2015. The side impact event was documented by 9 high-speed and 2 real-time cameras. Camera locations are included in this report.

The Dummies were instrumented in the following manner:

#### DRIVER ATD (ES-2re)

Primary and redundant head CG tri-axial accelerometers

Chest upper rib, middle rib, and lower rib y-axis displacement potentiometers

Abdomen forward, middle, and rear y-axis load cells

Lower spine (T12) tri-axial accelerometers

Public symphysis y-axis load cell

#### PASSENGER ATD (SID-IIs)

Primary and redundant head CG tri-axial accelerometers

Chest upper rib, middle rib, and lower rib y-axis displacement potentiometers

Abdomen upper rib and lower rib y-axis displacement potentiometers

Lower spine (T12) tri-axial accelerometers

Acetabulum and iliac wing y-axis load cells

Appendix B contains the vehicle and dummy response data. Dummy configuration and performance verification data can be found in APPENDIX C of this report. Appendix D of this report contains the test equipment and instrumentation calibration data.

### DUMMY INJURY VALUES

Measurement Description	Driver ATD (ES-2re)		
	Units	Threshold	Result
Head Injury Criteria (HIC36)		1000	247.226
Maximum Thorax Rib Deflection	mm	44	25.955
Combined Abdominal Force	N	2500	1089.460
Pubic Symphysis Force	N	6000	1705.034

Measurement Description	Passenger ATD (SID-IIs)		
	Units	Threshold	Result
Head Injury Criteria (HIC36)		1000	394.354
Lower Spine (T12) Resultant Acceleration	G	82	74.804
Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	2756.315
Maximum Thoracic Rib Deflection	mm	38*	36.525
Maximum Abdominal Rib Deflection	mm	45*	36.776

\*Proposed IARV

### SUPPLEMENTAL RESTRAINT INFORMATION

Restraint Type	Left Front (Driver) Occupant Location 1		Left Rear (Passenger) Occupant Location 4	
	Mounted	Deployed	Mounted	Deployed
Frontal Airbag	Yes	No		
Knee Airbag	No	N/A		
Side Airbag 1 - Curtain	Yes	Yes	Yes	Yes
Side Airbag 2 – Torso/Pelvis Airbag	Yes	Yes	No	N/A
Seat Belt Pretensioner	Yes	Yes	No	N/A
Seat Belt Load Limiter	Yes	Yes	No	N/A
Other				

#### GENERAL COMMENTS:

1. P1 serial number – F034
2. P4 serial number – DG8012

#### Data Anomalies:

The following channel was questionable for

- Left B-Pillar Lower Y Acceleration, Questionable spikes 2.5ms to 12ms
- Left B-Pillar Middle Y Acceleration, Questionable spike 8.1ms

**SECTION 3**  
**OCCUPANT AND VEHICLE INFORMATION**

This section contains information reporting for the following Data Sheets:

Data Sheet No. 1 - General Test and Vehicle Parameter Data

Data Sheet No. 2 – Seat, Seat Belt, Steering Wheel Adjustment and Fuel System Data

Data Sheet No. 3 – Dummy Longitudinal Clearance Dimensions

Data Sheet No. 4 – Dummy Lateral Clearance Dimensions

Data Sheet No. 5 – Camera and Instrumentation Data

Data Sheet No. 6 – Test Vehicle Accelerometer Locations

Data Sheet No. 7 – MDB Accelerometer Locations

Data Sheet No. 8 – Post-Test Observations

Data Sheet No. 9 – MDB Summary of Results

Data Sheet No. 10 – Test Vehicle Profile Measurements

Data Sheet No. 11 – Test Vehicle Exterior Crush Measurements

Data Sheet No. 12 – MDB Exterior Static Crush Measurements

Data Sheet No. 13 – Vehicle and MDB Damage Profile Distances

Data Sheet No. 14 – FMVSS No. 301 Static Rollover Results

Data Sheet No. 15 – Dummy/Vehicle Temperature and Humidity Stabilization Data

**DATA SHEET NO. 1  
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2017 Toyota Yaris iA four door sedan  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20175109  
 Test Date: 11/10/2016

**TEST VEHICLE INFORMATION AND OPTIONS**

NHTSA No.	M20175109
Model Year	2017
Make	Toyota
Model	Yaris iA
Body Style	Four Door Sedan
VIN	3MYDLBYV7HY147259
Body Color	Blue
Odometer Reading (km/mi)	35.4 km / 22 mi
Engine Displacement (L)	1.5
Type/No. Cylinders	I4
Engine Placement	Transverse
Transmission Type	Automatic
Transmission Speeds	6-Speed
Overdrive	Yes
Final Drive	FWD
Roof Rack	No
Sunroof/T-Top	No
Running Boards	No
Tilt Steering Wheel	Yes
Power Seats	No
Anti-Lock Brakes (ABS)	Yes

Traction Control System (TCS)	Yes
Auto-Leveling System	No
Automatic Door Locks (ADL)	Yes
Power Window Auto-Reverse	No
Other Optional Feature	-
Driver Front Airbag	Yes
Driver Curtain Airbag	Yes
Driver Head/Torso Airbag	No
Driver Torso Airbag	No
Driver Torso/Pelvis Airbag	Yes
Driver Pelvis Airbag	No
Driver Knee Airbag	No
Rear Pass. Curtain Airbag	Yes
Rear Pass. Head/Torso Airbag	No
Rear Pass. Torso Airbag	No
Rear Pass. Torso/Pelvis Airbag	No
Rear Pass. Pelvis Airbag	No
Driver Seat Belt Pretensioners	Yes
Rear Pass. Seat Belt Pretensioners	No
Driver Load Limiter	Yes
Rear Pass. Load Limiter	No
Other Safety Restraint	-

Does owner's manual provide instructions to turn off automatic door locks? Yes

**DATA FROM CERTIFICATION LABEL**

Manufactured By	Mazda Motor Manufacturing de Mexico S.A. de C.V.
Date of Manufacture	08/16
Vehicle Type	Passenger

GVWR (kg)	1539
GAWR Front (kg)	814
GAWR Rear (kg)	738

**VEHICLE SEATING AND WEIGHT CAPACITY DATA**

Measured Parameter	Front	Rear	Third	Total	
Designated Seating Capacity (DSC)	2	3	-	5	
Capacity Weight (VCW) (kg)				385	(A)
DSC X 68.04 kg				340.2	(B)
Cargo Weight (RCLW) (kg)				44.8	(A-B)

**VEHICLE SEAT TYPE**

Seating Location	Type of Seat Pan				Type of Seat Back		
	Bucket	Bench	Split Bench	Contoured	Fixed	Adjustable	
						W/ Lever	W/ Knob
Front Seat	X						X
Rear or Second Row Seat			X		X		
Third Row seat							


**DATA SHEET NO. 1 ... (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2017 Toyota Yaris iA four door sedan  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20175109  
 Test Date: 11/10/2016

**VEHICLE TIRE INFORMATION**

*Collected for year, make, model, & VIN, all items circled in red, tire manufacturer and tire name.*

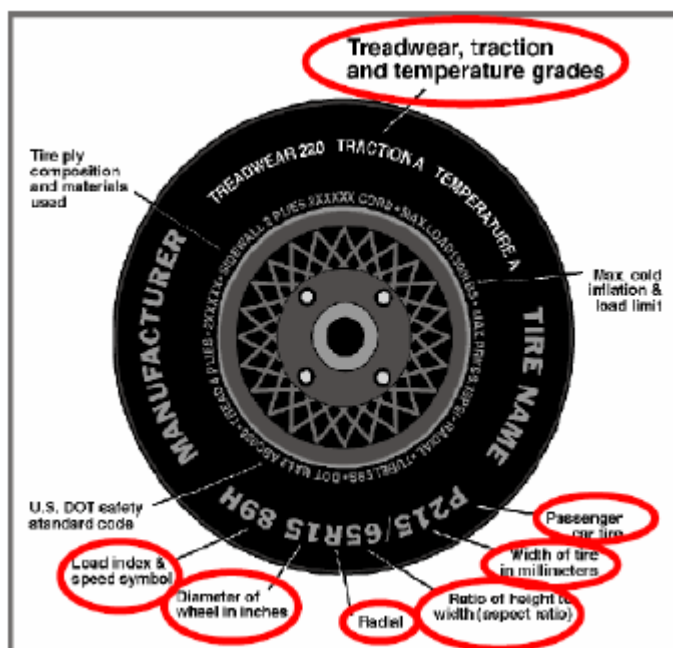

**TIRE SIDEWALL INFORMATION**

Measured Parameter	Front	Rear
Maximum Tire Pressure (kPa)	350	350
Cold Pressure (kPa)	250	230
Recommended Tire Size	P185/60R16	P185/60R16
Tire Size on Vehicle	P185/60R16	P185/60R16
Tire Manufacturer	Toyo	Toyo
Tire Model	Poxes A27	Poxes A27
Treadwear	240	240
Traction	A	A
Temperature Grade	A	A
Tire Plies Sidewall	1 Polyester	1 Polyester
Tire Plies Body	2 Steel, 1 Polyester, 1 Nylon	2 Steel, 1 Polyester, 1 Nylon
Load Index/Speed Symbol	86H	86H
Tire Material	Rubber	Rubber
DOT Safety Code Left	N3ELV570716	N3ELV570716
DOT Safety Code Right	N3ELV570716	N3ELV570716

**DATA SHEET NO. 1 ... (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2017 Toyota Yaris iA four door sedan  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20175109  
 Test Date: 11/10/2016

**TIRE PRESSURES**

	Units	LF	RF	LR	RR
As Delivered	kPa	292	300	302	280
Tire Placard	kPa	250	250	230	230
Owner's Manual	kPa	250	250	230	230
As Tested	kPa	250	250	230	230

**MDB TIRE SPECIFICATIONS**

	Units	Requirement	LF	RF	LR	RR
Tire Size		P205/75R15	P205/75R15	P205/75R15	P205/75R15	P205/75R15
Tire Pressure	kPa	200 ± 21	207	207	207	207

**TEST VEHICLE WEIGHTS**

	Units	As Delivered (UVW)			As Tested (ATW)			Fully Loaded		
		Front	Rear	Total	Front	Rear	Total	Front	Rear	Total
Left	kg	340	228		380	292		373	314	
Right	kg	335	206		340	263		337	257	
Ratio	%	60	40		56	44		55	45	
Totals	kg	675	434	1109	720	555	1275	710	571	1281

**TARGET TEST WEIGHT CALCULATION**

Measured Parameter	Units	Value	
Total Delivered Weight (UVW)	kg	1109	(A)
Sum of Actual Weight of 1 ES2re and 1 P572 ATD (SID-IIs)	kg	127	(B)
Rated Cargo / Luggage Weight (RCLW)	kg	44.8	(C)
Calculated Target Vehicle Test Weight (TVTW)	kg	1280.8	(A+B+C)

Does the measured As Test Vehicle Weight lie within the required weight range  
 (i.e. Calculated Test Vehicle Target Weight – 4.5 kg to – 9 kg)?  Yes  No

**TEST VEHICLE ATTITUDES AND CG**

Measurement Description	Units	Fully Loaded	As Tested	Meets Requirement**
LF	mm	671	671	Yes
RF	mm	683	678	Yes
RR	mm	675	672	Yes
LR	mm	656	657	Yes
Vehicle CG (Aft of Front Axle)	mm	1143	1116	
Vehicle CG (Left+)/Right(-) from Longitudinal Centerline)	mm	54	40	

\*\*\* The "As Tested" vehicle attitude measurements must be equal to or within ± 10mm of the "Fully Loaded" vehicle attitude measurements at each wheel well. Indicate "Yes" or "No" for "Meets Requirements".

Test height adjustable suspension setting, if applicable: N/A

**DATA SHEET NO. 1 ... (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2017 Toyota Yaris iA four door sedan NHTSA No.: M20175109  
Test Program: NCAP Side MDB Impact Test Test Date: 11/10/2016

**WEIGHT OF BALLAST AND VEHICLE COMPONENTS REMOVED TO MEET TVTW**

Component Description	Weight (kg)
Trunk Carpeting	4
Spare Tire & Jack	13
Tail Light	1
Passenger Side Door Internals	9
Ballast / Equipment Added	0

**DATA SHEET NO. 2**  
**SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA**

Test Vehicle: 2017 Toyota Yaris iA four door sedan  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20175109  
 Test Date: 11/10/2016

**SEAT POSITIONING**

*The driver's seat, front center seat (if applicable), and right front passenger's seat should be set to the mid-track, lowest, mid-angle position. The struck-side rear passenger's seat, rear center seat, and non-struck side rear passengers' seats should be set to the rear-most, lowest, mid-angle position.*

**SCRL ANGLE RANGE**

Seat	SCRL (°)		
	Max	Min	Mid
Driver Seat	13.6	17.1	15.35
Front Passenger Seat	Not Adjustable		
Front Center Seat*			
Struck Side Rear Seat	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Fixed
Rear Center Seat*	Fixed	Fixed	Fixed

*\*if applicable*

**SEAT HEIGHT AND ANGLE**

Seat	As Tested SCRL Angle (Mid) (°)	As Tested SCRP Height (mm)	SCRP Height Position	SCRP Height (mm)		
				Rearmost	Mid-Fore/Aft	Forward-Most
Driver Seat	15.35	25	Max	35	43	50
			Mid	17	25	33
			Min	0	8	17
Front Passenger Seat	Not Adjustable		Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Front Center Seat*	N/A	N/A	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Struck Side Rear Seat	Fixed	Fixed	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Non-Struck Side Rear Seat	Fixed	Fixed	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Rear Center Seat*	Fixed	Fixed	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-

*\*if applicable*

**DATA SHEET NO. 2 ... (CONTINUED)**  
**SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA**

Test Vehicle: 2017 Toyota Yaris iA four door sedan  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20175109  
 Test Date: 11/10/2016


**SEAT FORE / AFT POSITION**

Seat	Total Fore / Aft Travel		Test Position from Forwardmost Position	
	mm	Detents*	mm	Detent*
Driver Seat	260	27 (0-26)	130	13
Front Passenger Seat	260	27 (0-26)	130	13
Front Center Seat*	N/A	N/A	N/A	N/A
Struck Side Rear Seat	FIXED	FIXED	FIXED	FIXED
Non-Struck Side Rear Seat	FIXED	FIXED	FIXED	FIXED
Rear Center Seat*	FIXED	FIXED	FIXED	FIXED

*\*if applicable*

**SEAT BACK ANGLE ADJUSTMENT**

*The driver's seat back is positioned to the manufacturer's designated design angle. The front center and front passenger's seat backs are positioned in a similar manner as the driver's seat back. The struck side rear seat back is positioned such that the dummy's head is level. The rear center and non-struck side rear outboard seat backs are positioned in a similar manner as the struck-side rear seat back.*

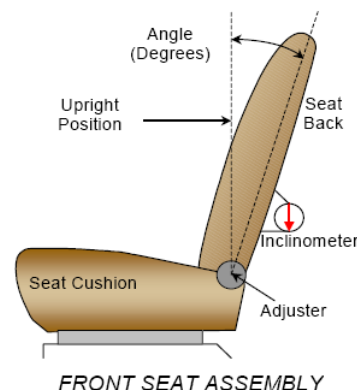

Seat	Total Seat Back Angle Range		Test Position from Most Upright	
	Degrees	Detents*	Degrees	Detents*
Driver Seat w/ Seated Dummy	-9.4 to 56.4	N/A	2	N/A
Front Passenger Seat	-10.2 to 57.3	N/A	1.8	N/A
Front Center Seat*	N/A	N/A	N/A	N/A
Struck Side Rear Seat w/ Seated Dummy	FIXED	FIXED	FIXED	FIXED
Non-Struck Side Rear Seat	FIXED	FIXED	FIXED	FIXED
Rear Center Seat*	FIXED	FIXED	FIXED	FIXED

*\*if applicable*

**DATA SHEET NO. 2 ... (CONTINUED)**  
**SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA**

Test Vehicle: 2017 Toyota Yaris iA four door sedan  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20175109  
 Test Date: 11/10/2016

**SEAT BELT ANCHORAGE ADJUSTMENT**

*Seat belt anchorages are adjusted in accordance with the information provided by the manufacturer on Form No. 1. For this test zero is defined as the uppermost position.*

	Total # of Positions	Placed in Position #
Driver Seat	3	0
Rear Seat	FIXED	FIXED

**HEAD RESTRAINT ADJUSTMENT**


*The driver's head restraint is adjusted to the highest and most full forward in-use position. The struck-side rear passenger's head restraint is adjusted to the lowest and most full forward in-use position.*

	Total # of Positions	Placed in Position #
Driver Seat	4	0 - Uppermost
Rear Seat	1	1

**STEERING COLUMN ADJUSTMENT**

*Steering wheel and column adjustments are made so that the steering wheel hub is at the center of its geometric locus it describes when it moves through its full range of motion.*


	Degrees	Fore/Aft Position (mm)
Lowermost – Position 1	22.3	
Geometric Center – Position 2	24.5	
Uppermost – Position 3	26.8	
Telescoping Steering Wheel Travel		50
Test Position	24.5	25



**FUEL PUMP**

*Describe the fuel pump type, details about how it operates, and the location of the fuel filler neck.*

The vehicle is equipped with an electric fuel pump. The fuel filler neck is on the left side of the vehicle. The pump creates positive pressure in the fuel lines, pushing the gasoline to the engine. See form 1 for more information.

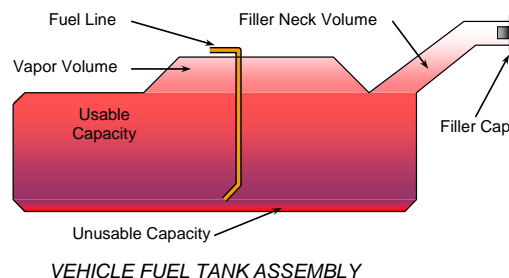

**DATA SHEET NO. 2 ... (CONTINUED)**  
**SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA**

Test Vehicle: 2017 Toyota Yaris iA four door sedan  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20175109  
 Test Date: 11/10/2016

**FUEL TANK CAPACITY**


	<b>Liters</b>
Usable Capacity of "Standard Tank" (see Form No. 1)	44
Usable Capacity of "Optional Tank" (see Form No. 1)	N/A
Usable Capacity of Standard Tank (see Owner's Manual)	44
Usable Capacity of Optional Tank (see Owner's Manual)	N/A
93% of Usable Capacity	40.9
Actual Amount of Solvent Used in Test	40.9
1/3 of Usable Capacity	14.6

Is the Actual Amount of Solvent Used in the test equal to 93% ± 1% of the Usable Capacity stated in Form No. 1?     **Yes**             **No**

**DATA SHEET NO. 3  
DUMMY LONGITUDINAL CLEARANCE DIMENSIONS**

Test Vehicle: 2017 Toyota Yaris iA four door sedan  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20175109  
 Test Date: 11/10/2016

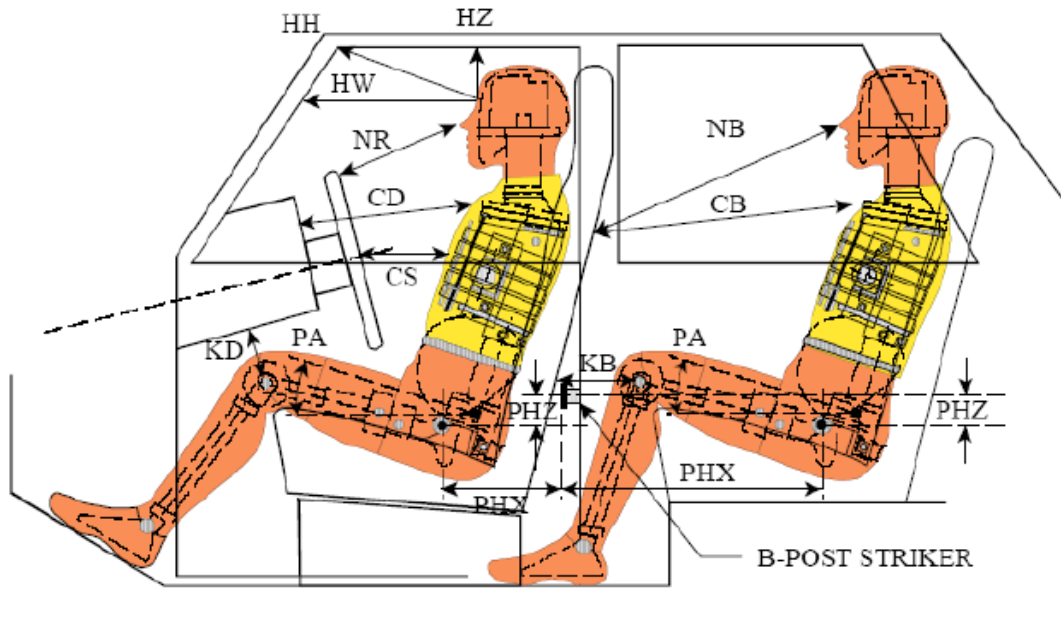

**LEFT SIDE VIEW**

NOTE: 2-DOOR VEHICLE SHOWN.  
 REAR DUMMY PHX & PHZ  
 MEASUREMENTS FOR A 4-DOOR  
 VEHICLE WOULD USE THE C-POST  
 STRIKER AS A REFERENCE POINT


**DUMMY LONGITUDINAL CLEARANCE DIMENSION INFORMATION**

Driver Code	Pass. Code	Description	Driver (Serial No. F034)		Passenger (Serial No. DG8012)	
			Length (mm)	Angle	Length (mm)	Angle
HH		Header to Header	335			
HW		Header to Windshield	607			
HZ	HZ	Head to Roof Liner	138		256	
NR	NB	Nose to Rim/Seat Back	410		437	
CD	CB	Chest to Dash/Seat Back	512		466	
CS		Chest to Steering Wheel	300			
KD(L)/KDA(L)°	KB(L)/KBA(L)°	Left Knee to Dash/Seat Back	135	27.1	238	20.1
KD(R)/KDA(R)°	KB(R)/KBA(R)°	Right Knee to Dash/Seat Back	152	9.2	236	15.8
PAX°	PAX°	Pelvic Tilt Angle X		21.8		19.6
	PAY°	Pelvic Tilt Angle Y				0.2
PHX	PHX	Hip Point to Striker (X-Axis)	175		245	
PHZ	PHZ	Hip Point to Striker (Z-Axis)	169		295	

**DATA SHEET NO. 4  
DUMMY LATERAL CLEARANCE DIMENSIONS**

Test Vehicle: 2017 Toyota Yaris iA four door sedan  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20175109  
 Test Date: 11/10/2016

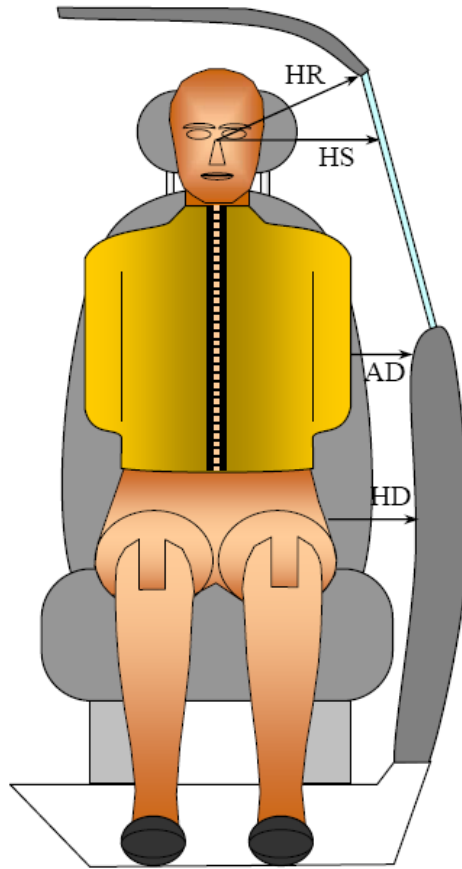

*FRONT VIEW OF DUMMY*


**DUMMY LATERAL CLEARANCE DIMENSION INFORMATION**

Code	Measurement Description	Units	Driver (Serial No. F034)	Passenger (Serial No. DG8012)
HR	Head to Side Header	mm	156	229
HS	Head to Side Window	mm	290	342
AD	Arm to Door	mm	75	113
HD	Hip Point to Door	mm	143	158

**DATA SHEET NO. 5  
CAMERA AND INSTRUMENTATION DATA**

Test Vehicle: 2017 Toyota Yaris iA four door sedan  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20175109  
 Test Date: 11/10/2016

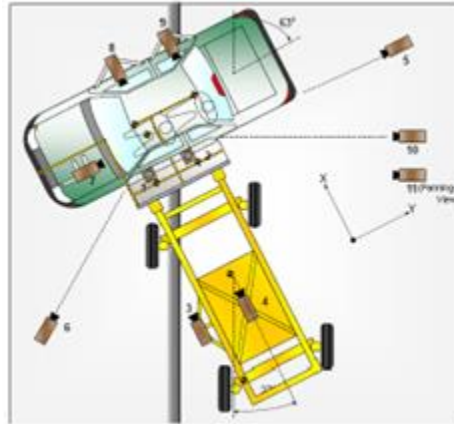

**CAMERA LOCATIONS AND DATA**

No.	Camera View	Coordinates (mm)			Lens Length (mm)	Operating Frame Rate (fps)
		X	Y	Z		
1	Overhead Overall	315	1085	-5305	14	1000
2	Overhead Close-up	0	1450	-5305	28	1000
3	Left Impact Point (MDB)	-1470	0	-847	25	1000
4	Side Overall (MDB)	-1140	838	-1587	12.5	1000
5	Rear	0	9621	-1191	24	1000
6	Left Front	-2713	-3724	-1188	20	1000
7	Driver Front (OB)				25	1000
8	Driver Side (OB)				12.5	1000
9	Passenger Side (OB)				12.5	1000
10	Real-time Left Rear				Zoom	60
11	Real-time In run				Zoom	60

Notes: Reference: Impact Point projected to Ground  
 +X = To Front of MDB, +Y = To Right of MDB, +Z = Down  
 \*All measurements accurate to ± 6 mm.

If applicable, explain why camera(s) did not operate as intended: All cameras operated normally


**INSTRUMENTATION**

Driver Dummy Channels	16
Passenger Dummy Channels	16
Vehicle Structure Accelerometers	23
MDB Accelerometers	7
<b>Total</b>	<b>62</b>

**DATA SHEET NO. 6**  
**TEST VEHICLE ACCELEROMETER LOCATIONS**

Test Vehicle: 2017 Toyota Yaris iA four door sedan  
Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20175109  
Test Date: 11/10/2016

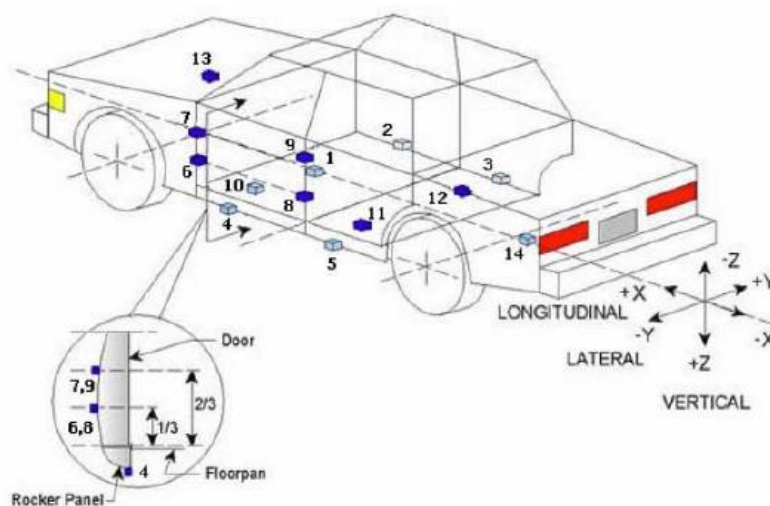

**TEST VEHICLE ACCELEROMETER LOCATIONS**


No.	Accelerometer Location	Coordinates (mm)		
		X	Y	Z
1	Vehicle CG	2567	105	-258
2	Right Sill at Front Seat	2578	627	-371
3	Right Sill at Rear Seat	1811	684	-301
4	Left Sill at Front Door	2626	-627	-368
5	Left Sill at Rear Door	1822	-692	-311
6	A-Post Lower	2981	-598	-74
7	A-Post Middle	2889	-580	380
8	B-Post Lower	1980	-691	-143
9	B-Post Middle	1923	-676	189
10	Front Seat Track	2167	-523	-330
11	Rear Seat Structure	2022	-520	-380
12	Rt. Rear Occ. Compartment	1845	395	-438
13	Engine Block	3620	124	100
14	Rear Above Axle	1083	128	-152

Reference: X – Rear surface of vehicle (+ forward)  
Y – Vehicle centerline (+ to right)  
Z – Ground plane (+ down)

**DATA SHEET NO. 7**  
**MDB ACCELEROMETER LOCATIONS**

Test Vehicle: 2017 Toyota Yaris iA four door sedan  
Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20175109  
Test Date: 11/10/2016

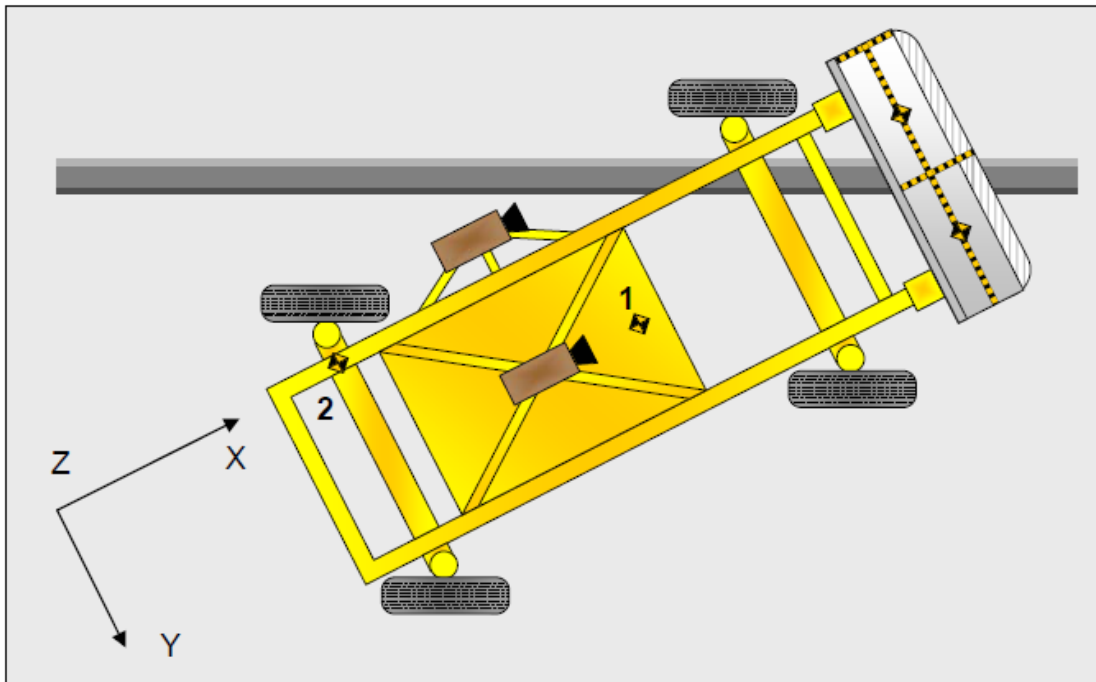

**MDB ACCELEROMETER LOCATIONS**

No.	Accelerometer Location	Coordinates (mm)		
		X	Y	Z
1	MDB CG	1859	0	-330
2	MDB Rear	386	-660	-660

*Reference: X – Face of MDB (+ forward)  
Y – MDB centerline (+ to right)  
Z – Ground plane (+ down)*

**DATA SHEET NO. 8  
POST-TEST OBSERVATIONS**

Test Vehicle: 2017 Toyota Yaris iA four door sedan  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20175109  
 Test Date: 11/10/2016

**TEST DUMMY INFORMATION AND CONTACT POINTS**

Dummy Body Part	Front Seat Dummy (ES-2re)	Rear Seat Dummy (SID-IIs)
Face	Side Header & Curtain Airbag	Curtain Airbag
Top of Head	Side Header	Side Header & Curtain Airbag
Left Side of Head	Side Header & Curtain Airbag	Curtain Airbag
Back of Head	Side Header & Headrest	Side Header & Center Headrest
Left Shoulder	Driver Door	Passenger Door
Upper Torso	Seatback & Torso/Pelvis Airbag	Passenger Door
Lower Torso	Seatback & Torso/Pelvis Airbag	Passenger Door
Left Hip	Seatback & Torso/Pelvis Airbag	Seat Pan & Passenger Door
Left Knee	Driver Door	Passenger Door

**POST-TEST DOOR PERFORMANCE**

Description	Struck Side		Non-Struck Side		Rear Hatch/ Other*
	Front	Rear	Front	Rear	
Remained Closed and Operational	No	No	Yes	Yes	Yes
Total Separation from Vehicle at Hinges or Latches	No	No	No	No	No
Latch or Hinge Systems Pulled Out of Their Anchorages	No	No	No	No	No
Disengaged from Latched Position	No	No	No	No	No
Latch Separated from Striker	No	No	No	No	No
Jammed Shut	Yes	Yes	No	No	No
If Door Opened at Striker, Width of Opening at Striker (mm)	0	0	0	0	0

\*Tailgate opened during impact but is still operational.

**POST-TEST SEAT PERFORMANCE**

Description	Struck Side		Non-Struck Side	
	Front	Rear	Front	Rear
Seat Movement Along Seat Track	No	No	No	No
Seat Disengagement from Floor Pan	No	No	No	No
Seat Back Movement from Initial Position	No	No	No	No
Seat Back Collapse	No	No	No	No

**POST-TEST STRUCTURAL OBSERVATIONS**

Critical Areas of Performance	Observations and Conclusions
Pillar Performance	B-Pillar & C-Pillar Buckled
Sill Separation	None
Windshield Damage	None
Side Window Damage	Rear Passenger Window Shattered
Other Notable Effects	None

**DATA SHEET NO. 8 ... (CONTINUED)  
POST-TEST OBSERVATIONS**

Test Vehicle: 2017 Toyota Yaris iA four door sedan  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20175109  
 Test Date: 11/10/2016

**SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION**

Restraint Type	Struck Side Driver		Struck Side Rear Passenger	
	Mounted	Deployed	Mounted	Deployed
Frontal Airbag	Yes	No		
Knee Airbag	N/A	No		
Side Airbag 1 - Curtain	Yes	Yes	Yes	Yes
Side Airbag 2 - Torso/Pelvis Airbag	Yes	Yes	No	N/A
Seat Belt Pretensioner	Yes	Yes	No	N/A
Seat Belt Load Limiter	Yes	Yes	No	N/A
Other				

**IMPACT POINT LOCATION DATA**

Measured Parameter	Units	Tolerance	Value
Vehicle Wheel Base	mm		2565
Vertical Impact Reference Line (Aft of Front Axle - Intended Impact Point)	mm		342
Actual Impact Point (Aft of Frontal Axle)	mm		348
Horizontal Offset (+ forward / - rearward)	mm	+/- 50 of Intended Impact Point	-6
Vertical Offset (+ down / - up)	mm	+/- 20 of Intended Impact Point	-2

**DATA SHEET NO. 9  
MDB SUMMARY OF RESULTS**

Test Vehicle: 2017 Toyota Yaris iA four door sedan  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20175109  
 Test Date: 11/10/2016

**MDB SPECIFICATIONS**

Measurement Description	Length (mm)
Overall Width of Framework Carriage	1,250
Overall Length Including Honeycomb Frame	4,120
Wheelbase of Framework Carriage	2,600
CG Location of Front Axle	1,120

**MDB WEIGHTS**

	Units	Front Axle	Rear Axle	Total
Left	kg	392.5	297.5	690.0
Right	kg	386.0	291.5	677.5
Ratio	%	57.4%	42.6%	100.0%
Totals	kg	778.5	589.0	1367.5

**SPEED AND ANGLE AT IMPACT DATA**

Measured Parameter	Units	Requirement	Value
Trap No. 1 Velocity (Primary)	km/h	61.10 to 62.70	62.07
Trap No. 2 Velocity (Redundant)	km/h	61.10 to 62.70	62.13
MDB CL to Target Vehicle CL	degrees	88.5 to 91.5	90.0
MDB Forward Line of Motion to Target Vehicle CL	degrees	62.5 to 63.5	63.0
MDB Crabbed angle to MDB Forward Line of Motion	degrees	26.0 to 28.0	27.0


**MAXIMUM STATIC CRUSH OF HONEYCOMB IMPACT FACE**

Vertical Location			From Centerline		Maximum Crush (mm)
Row	Description	Height (mm)	Distance (mm)	Direction	
A	Center of Bumper	432	800	Left	212
B	Top of Bumper	533	800	Left	123
C	Mid-Level	686	800	Left	100
D	Top of Stack	813	800	Left	133

**DATA SHEET NO. 10  
TEST VEHICLE PROFILE MEASUREMENTS**

Test Vehicle: 2017 Toyota Yaris iA four door sedan  
Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20175109  
Test Date: 11/10/2016

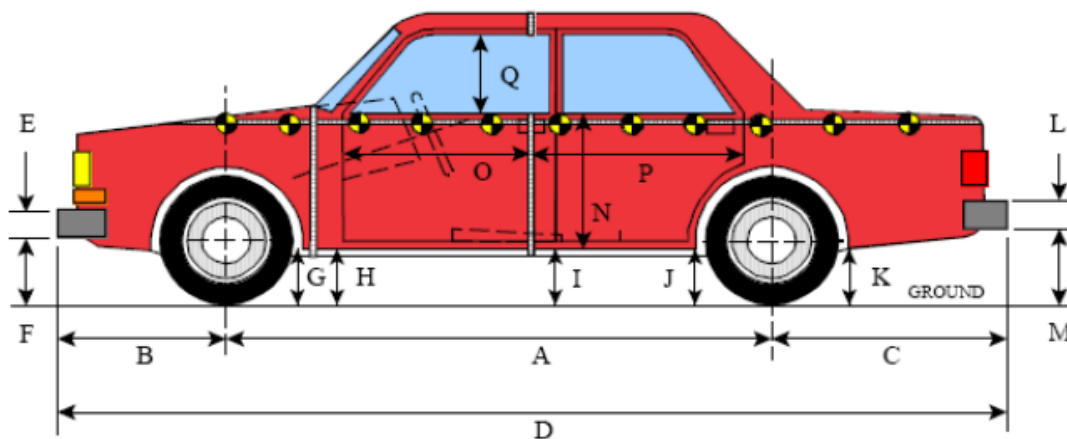

**LEFT SIDE VIEW**

All MEASUREMENTS IN (mm) WITH TOLERANCE OF  $\pm 3$ mm


**VEHICLE PRE- AND POST-TEST MEASUREMENT INFORMATION**

Code	Description	Pre-Test	Post-Test	Difference
A	Wheelbase	2565	2554	-11
B	Front Axle to FSOV	856	850	-6
C	Rear Axle to RSOV	942	969	27
D	Total Length at Centerline	4363	4370	8
E	Front Bumper Thickness	110	110	0
F	Front Bumper Bottom to Ground	413	412	-1
G	Sill Height at Front Wheel Well	185	205	20
H	Sill Height at Front Door Leading Edge	186	205	19
I	Sill Height at B Pillar	188	211	23
J1	Sill Height at Rear Wheel Well	183	182	-1
J2	Pinch Weld Height at Rear Wheel Well	155	152	-3
K	Sill Height Aft of Rear Wheel Well	235	230	-5
L	Rear Bumper Thickness	170	170	0
M	Rear Bumper Bottom to Ground	453	441	-12
N	Sill Height to Window Bottom of Front Window Sill	800	777	-23
O	Front Door Leading Edge to Impact CL	664	662	-2
P	Rear Door Trailing Edge to Impact CL	1332	1295	-37
Q	Front Window Opening	435	434	-1
R	Right Side Length	4202	4252	49
S	Left Side Length	4200	4195	-5
T	Maximum Vehicle Width	1696	1646	-50

**DATA SHEET NO. 11**  
**TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS**

Test Vehicle: 2017 Toyota Yaris iA four door sedan  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20175109  
 Test Date: 11/10/2016

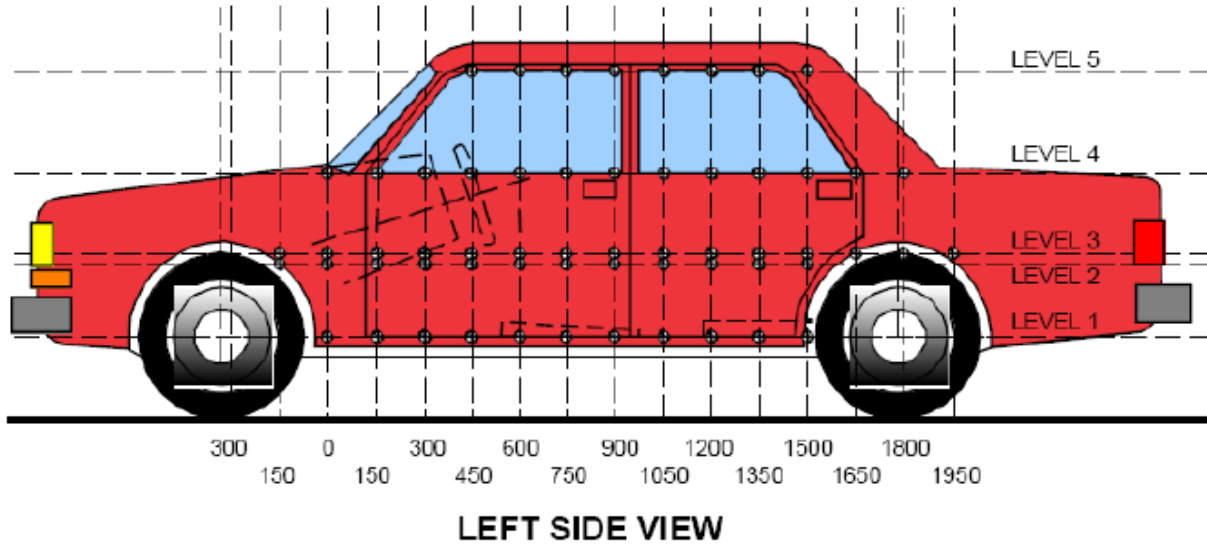

**MAXIMUM EXTERIOR CRUSH MEASUREMENTS**

Level	Measurement Description	Units	Height Above Ground	Maximum Exterior Static Crush	Distance from Impact
1	Sill Top	mm	236	-37	300
2	Driver Hip Point	mm	530	123	300
3	Mid-Door	mm	636	98	150
4	Window Sill	mm	931	33	1500
5	Window Top	mm	1424	-27	900

\*window top level bent outward from original position

**NOTE:** The above measurements should be taken along the vertical impact reference line. Vehicle measurements forward of the vertical impact reference line are negative.

**DATA SHEET NO. 11 ... (CONTINUED)**  
**TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS**

Test Vehicle: 2017 Toyota Yaris iA four door sedan  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20175109  
 Test Date: 11/10/2016

**EXTERIOR CRUSH MEASUREMENTS AT EACH LEVEL**


	Pre-Test					Post-Test					Difference				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
-900															
-750															
-600															
-450															
-300															
-150			846					841					5		
0		845	845	738			810	808	737			35	37	1	
150	808	842	842	753		850	731	744	750		-42	111	98	3	
300	802	841	845	765		839	718	761	745		-37	123	84	20	
450	799	840	846			842	717	751			-43	123	95		
600	797	840	847	777		845	734	759	767		-48	106	88	10	
750	795	839	847	783		855	763	764	779		-60	76	83	4	
900	794	837	845	789	475	863	762	772	788	502	-69	75	73	1	-27
1050	793	835	843	793	551	871	753	773	794	585	-78	82	70	-1	-34
1200	794	831	839	796	560	876	771	789	788	598	-82	60	50	8	-38
1350	795	828	835	797	561	888	766	788	789	601	-93	62	47	8	-40
1500	798	827	832	797	557	902	774	799	764	606	-104	53	33	33	-49
1650	805	830	832	797	551	917	783	807	774	606	-112	47	25	23	-55
1800	814	841	837	796	534	941	845	822	770	598	-127	-4	15	26	-64
1950			847	777				892	821				-45	-44	
2100				798					905					-107	
2250				785					899					-114	
2400				773					910					-137	
2550															
2700															
2850															
3000															

**NOTE:** Pre-test measurements are taken when the vehicle is in the "As Tested" weight condition.  
 Vehicle measurements forward of the vertical impact reference line are negative.  
 The crush profile grid is established prior to test based on an estimated impact point.

**DATA SHEET NO. 11 (CONTINUED)**  
**TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS**

Test Vehicle: 2017 Toyota Yaris iA four door sedan  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20175109  
 Test Date: 11/10/2016

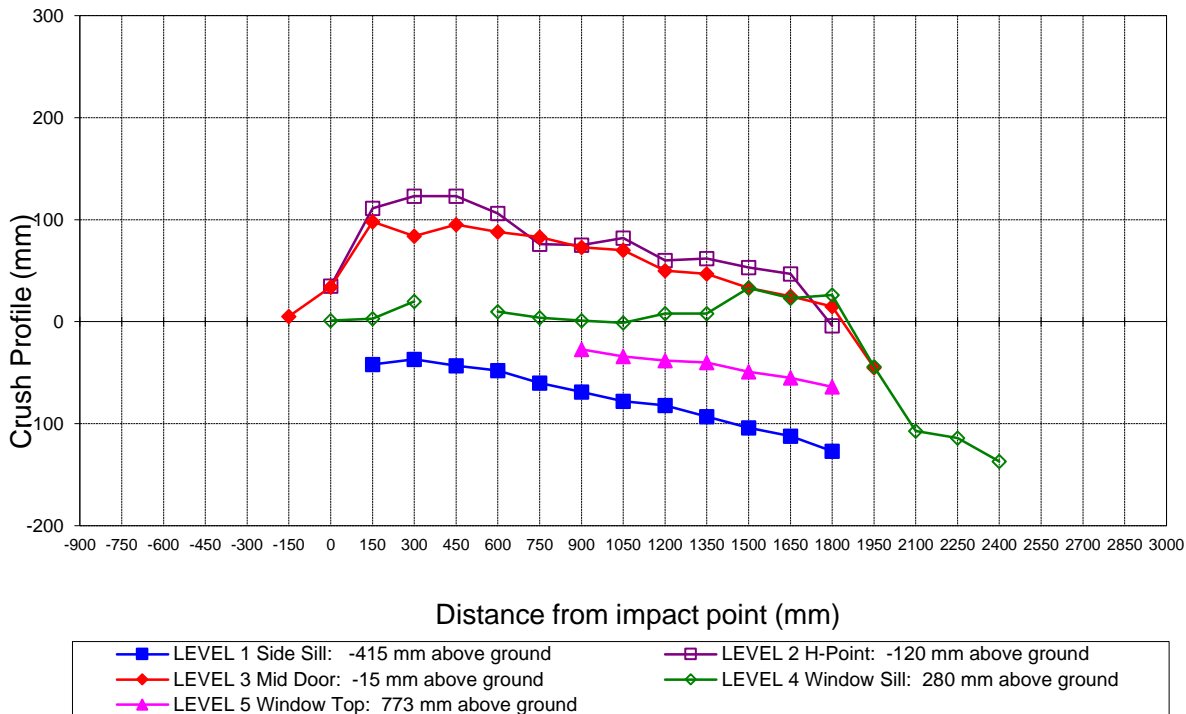


**Vehicle Exterior Crush Measurements - Visual Representation**

**DATA SHEET NO. 12**  
**MDB EXTERIOR STATIC CRUSH MEASUREMENTS**

Test Vehicle: 2017 Toyota Yaris iA four door sedan  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20175109  
 Test Date: 11/10/2016

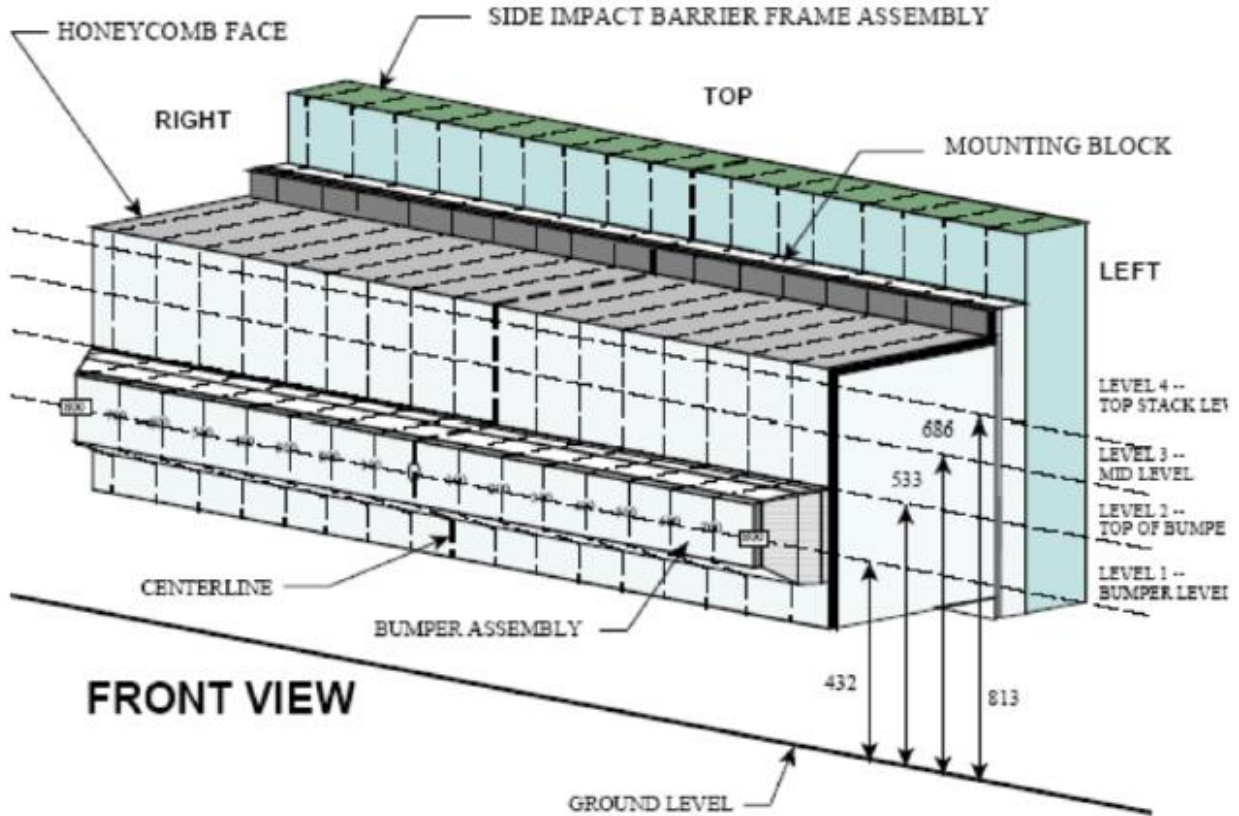

NOTE: Dimensions are shown in millimeters, mm

**DEFORMABLE BARRIER STATIC CRUSH**


Stack Level	Distance Right of Center								C/L	Distance Left of Center							
	800	700	600	500	400	300	200	100		0	100	200	300	400	500	600	700
1	151	147	147	147	147	148	147	146	143	142	142	141	142	142	149	178	212
2	88	91	89	90	90	90	88	88	87	84	83	84	85	84	87	111	123
3	9	8	12	18	36	63	56	34	27	24	25	29	36	48	66	81	100
4	-2	-3	3	19	46	78	81	62	35	40	48	53	57	71	86	111	133

**DATA SHEET NO. 13**  
**MDB EXTERIOR STATIC CRUSH MEASUREMENTS**

Test Vehicle: 2017 Toyota Yaris iA four door sedan  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20175109  
 Test Date: 11/10/2016

For guidance regarding damage profile distance measurements, please refer to the latest version of the *NHTSA Test Reference Guide, Volume 1: Vehicle Tests*.

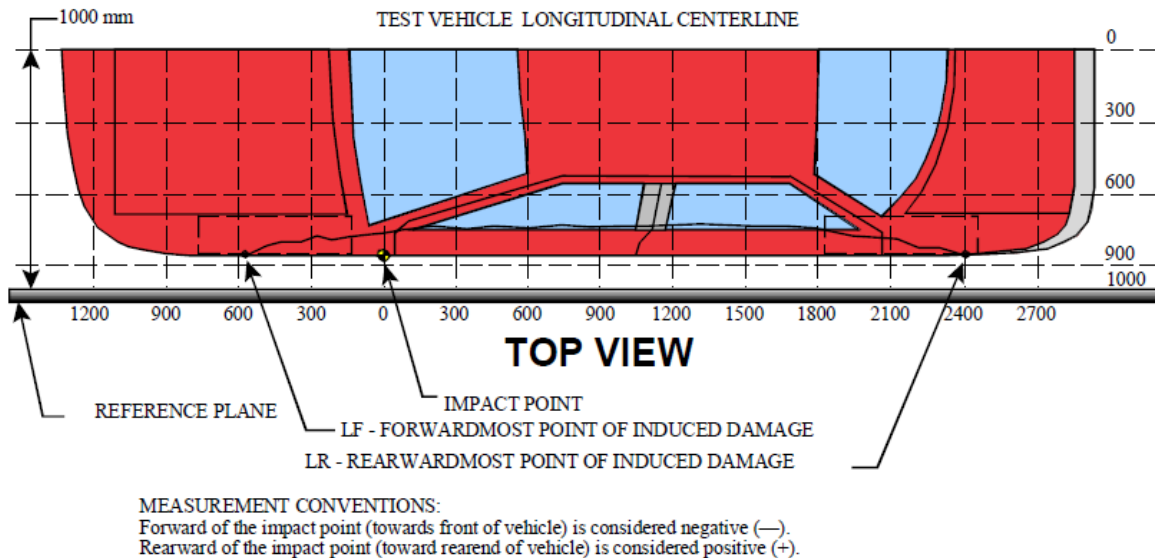

**VEHICLE DAMAGE PROFILE DISTANCES**

DPD	Distance From Impact Point (mm)	Level	Post-Test (mm)	Pre-Test (mm)	Crush (mm)
1	-150	3	159	154	5
2	270	3	242	156	86
3	690	3	238	153	85
4	1110	3	221	159	62
5	1530	3	199	168	31
6	1950	3	108	153	-45

**MDB DAMAGE PROFILE DISTANCES**

DPD	Distance From Center of MDB	Level	Post-Test (mm)*
1	800 mm left of center	1	212
2	480 mm left of center	1	142
3	160 mm left of center	1	142
4	160 mm right of center	1	147
5	480 mm right of center	1	147
6	800 mm right of center	1	151

**DATA SHEET NO. 14  
FMVSS NO. 301 STATIC ROLLOVER RESULTS**

Test Vehicle:	<u>2017 Toyota Yaris iA four door sedan</u>	NHTSA No.:	<u>M20175109</u>
Test Program:	<u>NCAP Side MDB Impact Test</u>	Test Date:	<u>11/10/2016</u>
Test Time:	<u>11:55 AM</u>	Temperature:	<u>21°C</u>

- |   |                             |     |
|---|-----------------------------|-----|
| A. From impact until vehicle motion ceases:<br>(Maximum allowable is 1 oz.)     | <u>0</u>                    | oz. |
| B. For the 5-minute period after motion ceases:<br>(Maximum allowable is 5 oz.) | <u>0</u>                    | oz. |
| C. For the following 25 minutes:<br>(Maximum allowable is 1 oz./minute)         | <u>0</u>                    | oz. |
| D. Spillage Details:  | <u>No Spillage Occurred</u> |     |

**FMVSS NO. 301 STATIC ROLLOVER DATA**



**ROLLOVER SOLVENT COLLECTION TIME TABLE IN SECONDS**

Test Phase	Rotation Time	Hold Time	Total Time
0° to 90°	72	300	372
90° to 180°	60	300	360
180° to 270°	60	300	360
270° to 360°	70	300	370

**FMVSS NO. 301 ROLLOVER SPILLAGE TABLE**

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° to 90°	0	0	0	
90° to 180°	0	0	0	
180° to 270°	0	0	0	
270° to 360°	0	0	0	


**ROLLOVER SOLVENT SPILLAGE LOCATION TABLE**

Test Phase	Spillage Location
0° to 90°	None
90° to 180°	None
180° to 270°	None
270° to 360°	None

**DATA SHEET NO. 15  
DUMMY/VEHICLE TEMPERATURE AND HUMIDITY STABILIZATION DATA**

Test Vehicle: 2017 Toyota Yaris iA four door sedan  
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20175109  
 Test Date: 11/10/2016

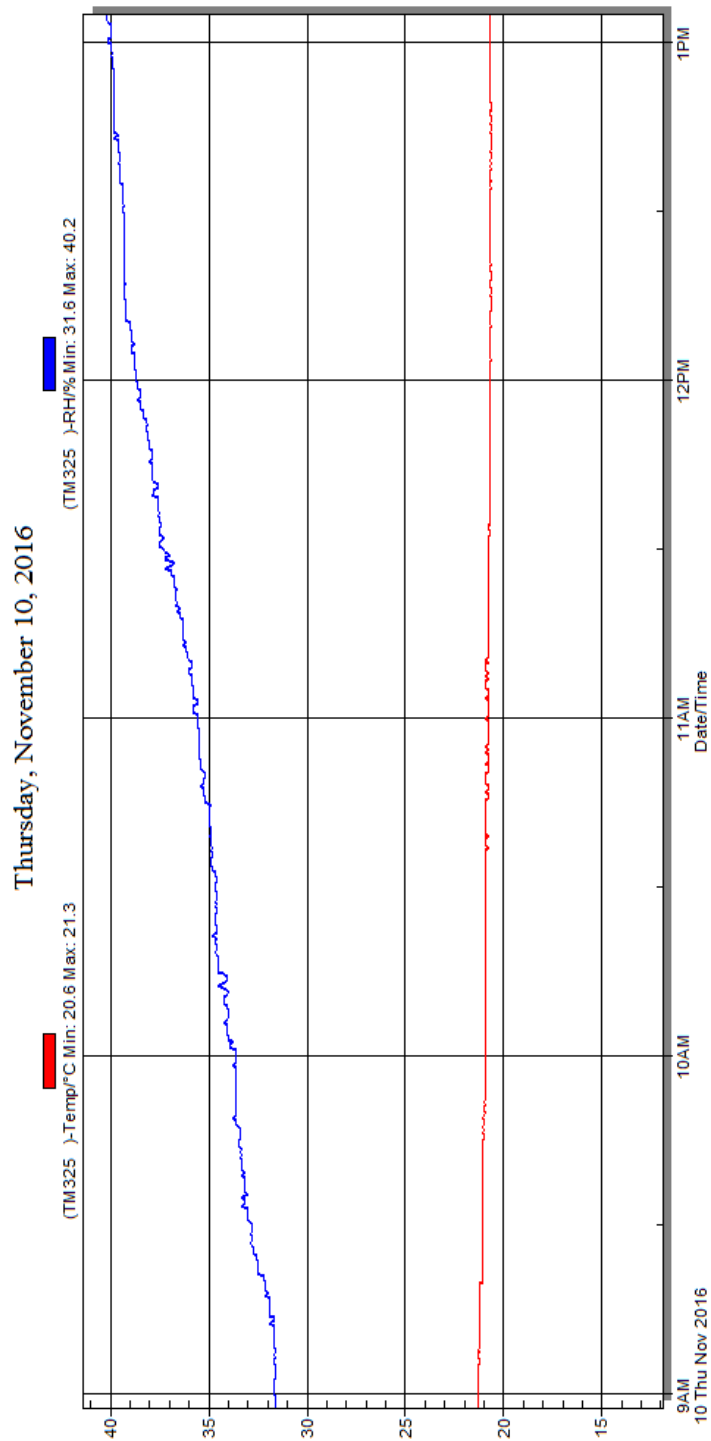

**Temperature and Humidity Stabilization Chart/Data for Dummies and Test Vehicle**

**APPENDIX A**  
**PHOTOGRAPHS**

## TABLE OF PHOTOGRAPHS

Fig.	Description	Page
1	As-Delivered Right Front 3/4 View of Test Vehicle	A-5
2	As-Delivered Left Rear 3/4 View of Test Vehicle	A-5
3	Pre-Test Frontal View of Test Vehicle	A-6
4	Post-Test Frontal View of Test Vehicle	A-6
5	Pre-Test Left Front 3/4 View of Test Vehicle	A-7
6	Post-Test Left Front 3/4 View of Test Vehicle	A-7
7	Pre-Test Left Side View of Test Vehicle	A-8
8	Post-Test Left Side View of Test Vehicle	A-8
9	Pre-Test Left Rear 3/4 View of Test Vehicle	A-9
10	Post-Test Left Rear 3/4 View of Test Vehicle	A-9
11	Pre-Test Rear View of Test Vehicle	A-10
12	Post-Test Rear Side View of Test Vehicle	A-10
13	Pre-Test Right Side View of Test Vehicle	A-11
14	Post-Test Right Side View of Test Vehicle	A-11
15	Pre-Test Overhead View of Test Area	A-12
16	Post-Test Overhead View of Test Area	A-12
17	Pre-Test Left Side View of MDB Positioned Against Side of Test Vehicle	A-13
18	Pre-Test Right Side View of MDB Positioned Against Side of Test Vehicle	A-13
19	Pre-Test Close-Up View of Impact Point Target	A-14
20	Post-Test Close-up View of Impact Point Target	A-14
21	Pre-Test Left Front Door Latch Close-Up	A-15
22	Post-Test Left Front Door Latch Close-Up	A-15
23	Pre-Test Left Rear Door Latch Close-Up	A-16
24	Post-Test Left Rear Door Latch Close-Up	A-16
25	Pre-Test Front Close-up View of Driver Dummy	A-17
26	Post-Test Front Close-up View of Driver Dummy	A-17
27	Pre-Test Left Side View of Driver Dummy Showing Belt and Chalking	A-18
28	Pre-Test Left Side View of Driver Dummy Shoulder and Door Top View	A-18
29	Post-Test Left Side View of Driver Dummy Shoulder and Door Top View	A-19
30	Pre-Test Frontal View of Driver Seat Back Prior to Dummy Positioning	A-19
31	Pre-Test Frontal View of Driver Dummy Head and Shoulders in Relation to Head Restraint	A-20
32	Pre-Test Frontal View of Driver Seat Pan Prior to Dummy Positioning	A-20
33	Pre-Test Overhead View of Driver Dummy Thighs on Seat Pan	A-21
34	Pre-Test Placement of Driver Dummy's Feet	A-21

<b>Fig.</b>	<b>Description</b>	<b>Page</b>
35	Pre-Test View of Belt Anchorage for Driver Dummy	A-22
36	Pre-Test Left Side View of Steering Wheel	A-22
37	View of Disengaged Parking Brake	A-23
38	Pre-Test View of Parking Brake	A-23
39	Pre-Test Close-Up Left Side View of Driver Seat Track	A-24
40	Pre-Test Close-Up Left Side View of Driver Seat Back	A-24
41	Pre-Test Close-Up View of Driver Seat Back or Head Restraint	A-25
42	Pre-Test Driver Dummy and Door Clearance View	A-25
43	Post-Test Driver Dummy and Door Clearance View	A-26
44	Pre-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment	A-26
45	Post-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment	A-27
46	Pre-Test Driver Inner Door Panel View	A-27
47	Post-Test Driver Inner Door Panel View	A-28
48	Post-Test Driver Dummy Close-Up Head Contact with Vehicle View	A-28
49	Post-Test Driver Dummy Close-Up Head Contact with Side Airbag View	A-29
50	Post-Test Driver Dummy Close-Up Torso Contact with Vehicle Interior View	A-29
51	Post-Test Driver Dummy Close-Up Torso Contact with Side Airbag View	A-30
52	Post-Test Driver Dummy Close-Up Pelvis Contact View	A-30
53	Post-Test Driver Dummy Close-Up Pelvis Contact with Side Airbag View	A-31
54	Post-Test Driver Dummy Close-Up Knee Contact View	A-31
55	Pre-Test Left Side View of Passenger Dummy Showing Belt and Chalking	A-32
56	Pre-Test Left Side View of Passenger Dummy Shoulder and Door Top View	A-32
57	Post-Test Left Side View of Passenger Dummy Shoulder and Door Top View	A-33
58	Pre-Test Frontal View of Rear Passenger Seat Back Prior to Dummy Positioning	A-33
59	Pre-Test Frontal View of Rear Passenger Dummy Head and Shoulders in Relation to Head Restraint	A-34
60	Pre-Test Overhead View of Rear Passenger Seat Pan Prior to Dummy Positioning	A-34
61	Pre-Test Overhead View of Rear Passenger Dummy Thighs on Seat Pan	A-35
62	Pre-Test View of Rear Passenger Dummy's Neck Showing Position of Adjustable Neck Bracket	A-35
63	Pre-Test View of Rear Passenger Dummy's Head Showing Dummy's Head is Level	A-36
64	Pre-Test Placement of Rear Passenger Dummy's Feet	A-36
65	Pre-Test View of Belt Anchorage for Rear Passenger Dummy	A-37
66	Pre-Test Close-Up Left Side View of Rear Passenger Seat Track	A-37
67	Pre-test Close-Up Left Side View of Rear Passenger Seat Back	A-38
68	Pre-Test Close-Up View of Rear Passenger Seat Back or Head Restraint	A-38

<b>Fig.</b>	<b>Description</b>	<b>Page</b>
69	Pre-Test Passenger Dummy and Door Clearance View	A-39
70	Post-Test Passenger Dummy and Door Clearance View	A-39
71	Pre-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment	A-40
72	Post-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment	A-40
73	Pre-Test Passenger Inner Door Panel View	A-41
74	Post-Test Passenger Inner Door Panel View	A-41
75	Post-Test Rear Passenger Dummy Close-Up Head Contact with Vehicle View	A-42
76	Post-Test Rear Passenger Dummy Close-Up Head Contact with Side Airbag View	A-42
77	Post-Test Rear Passenger Dummy Close-Up Torso Contact with Vehicle Interior View	A-43
78	Post-Test Rear Passenger Dummy Close-Up Torso Contact with Side Airbag View	A-43
79	Post-Test Rear Passenger Dummy Close-Up Pelvis Contact View	A-44
80	Post-Test Rear Passenger Dummy Close-Up Pelvis Contact with Side Airbag View	A-44
81	Post-Test Rear Passenger Dummy Close-Up Knee Contact View	A-45
82	Pre-Test View of Fuel Filler Cap or Fuel Filler Neck	A-45
83	Post-Test View of Fuel Filler Cap or Fuel Filler Neck	A-46
84	Pre-Test Front View of MDB Impactor Face	A-46
85	Post-Test Front View of MDB Impactor Face	A-47
86	Pre-Test Top View of MDB Impactor Face	A-47
87	Post-Test Top View of MDB Impactor Face	A-48
88	Pre-Test Left Side View of MDB Impactor Face	A-48
89	Post-Test Left Side View of MDB Impactor Face	A-49
90	Pre-Test Right Side View of MDB Impactor Face	A-49
91	Post-Test Right Side View of MDB Impactor Face	A-50
92	Close-Up View of Vehicle's Certification Label	A-50
93	Close-Up View of Vehicle's Tire Information Placard or Label	A-51
94	Pre-Test Ballast View	A-51
95	Post-Test Primary and Redundant Speed Trap Read-Out	A-52
96	FMVSS No. 301 Static Rollover 0 Degrees	A-52
97	FMVSS No. 301 Static Rollover 90 Degrees	A-53
98	FMVSS No. 301 Static Rollover 180 Degrees	A-53
99	FMVSS No. 301 Static Rollover 270 Degrees	A-54
100	FMVSS No. 301 Static Rollover 360 Degrees	A-54
101	Impact Event	A-55
102	Monroney Label	A-55
103	Driver Head Restraint Use and Adjustment Information from Vehicle Owner's Manual	A-56
104	Left Rear Passenger Head Restraint Use and Adjustment Information from Vehicle Owner's Manual	A-56



**Figure A-1: As-Delivered Right Front 3/4 View of Test Vehicle**



**Figure A-2: As-Delivered Left Rear 3/4 View of Test Vehicle**



**Figure A-3: Pre-Test Frontal View of Test Vehicle**



**Figure A-4: Post-Test Frontal View of Test Vehicle**



**Figure A-5: Pre-Test Left Front  $\frac{3}{4}$  View of Test Vehicle**



**Figure A-6: Post-Test Left Front  $\frac{3}{4}$  View of Test Vehicle**



**Figure A-7: Pre-Test Left Side View of Test Vehicle**



**Figure A-8: Post-Test Left Side View of Test Vehicle**



**Figure A-9: Pre-Test Left Rear 3/4 View of Test Vehicle**



**Figure A-10: Post-Test Left Rear 3/4 View of Test Vehicle**



**Figure A-11: Pre-Test Rear View of Test Vehicle**



**Figure A-12: Post-Test Rear Side View of Test Vehicle**




**Figure A-13: Pre-Test Right Side View of Test Vehicle**



**Figure A-14: Post-Test Right Side View of Test Vehicle**




**Figure A-15: Pre-Test Overhead View of the Test Area**

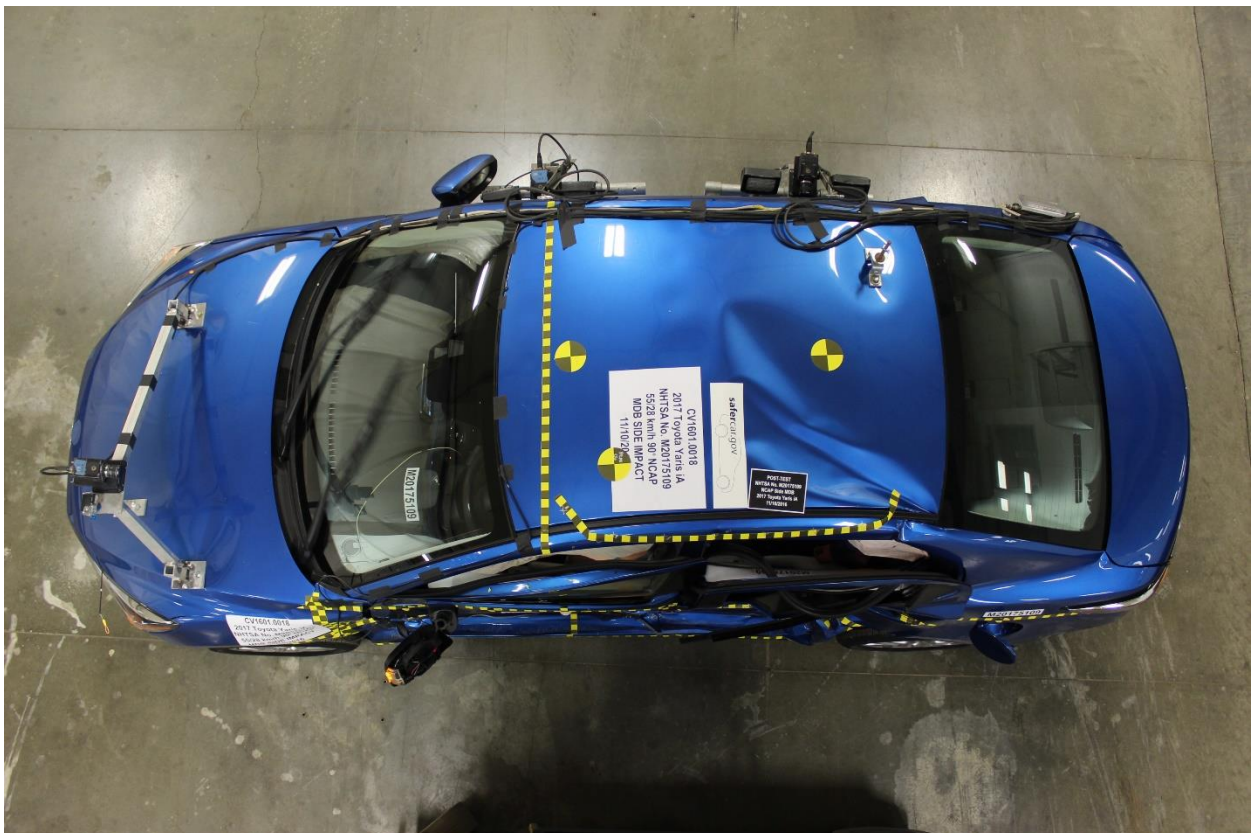

**Figure A-16: Post-Test Overhead View of Test Area**



**Figure A-17: Pre-Test Left Side View of MDB Positioned Against Side of Test Vehicle**

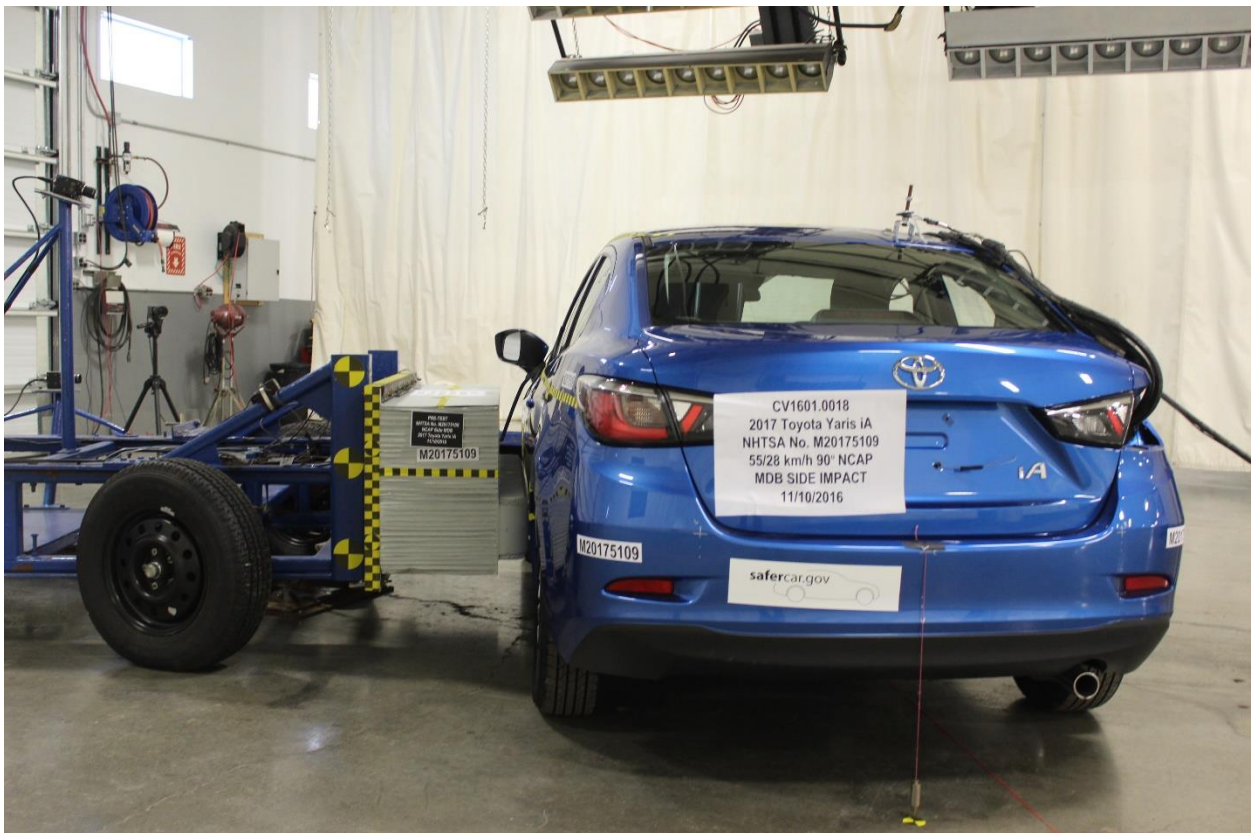

**Figure A-18: Pre-Test Right Side View of MDB Positioned Against Side of Test Vehicle**



Figure A-19: Pre-Test Close-up View of Impact Point Target



Figure A-20: Post-Test Close-up View of Impact Point Target



Figure A-21: Pre-Test Left Front Door Latch Close-Up



Figure A-22: Post-Test Left Front Door Latch Close-Up



Figure A-23: Pre-Test Left Rear Door Latch Close-Up

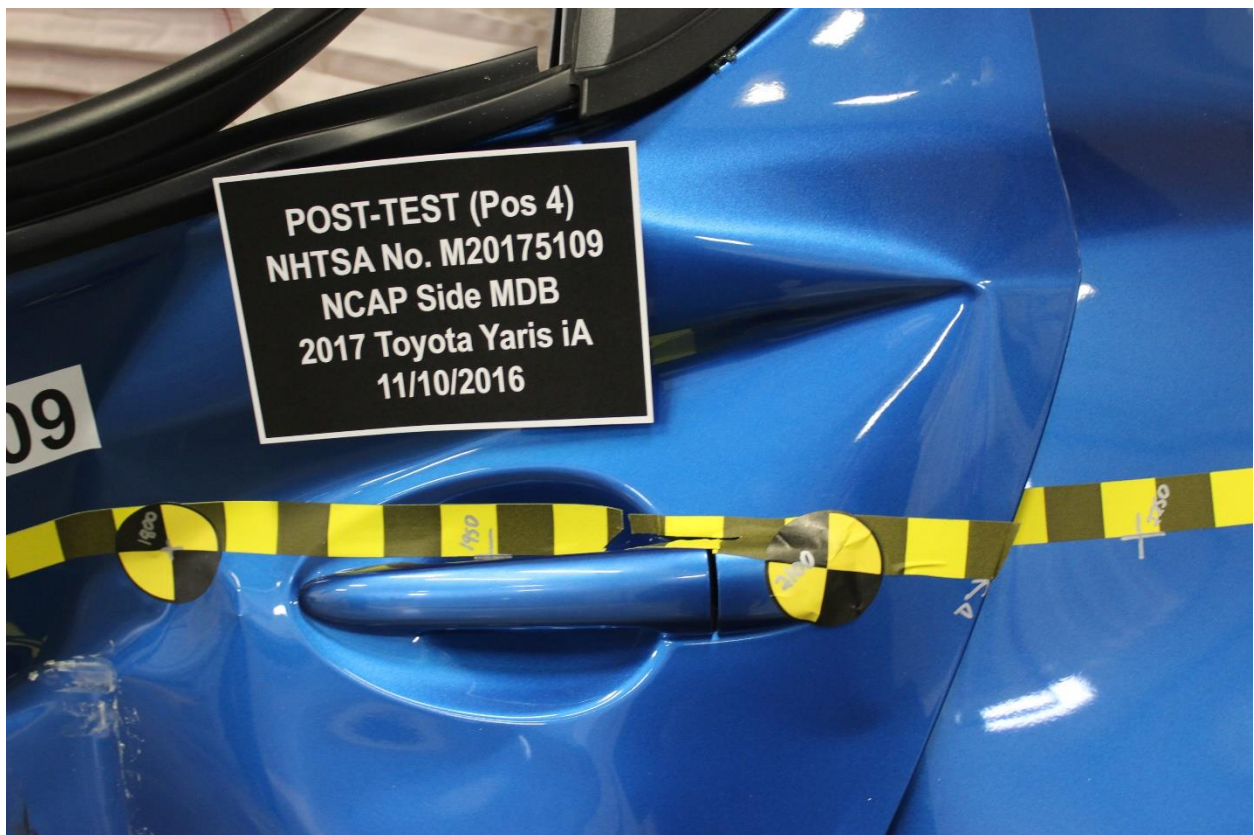


Figure A-24: Post-Test Left Rear Door Latch Close-Up



**Figure A-25: Pre-Test Front Close-up View of Driver Dummy**



**Figure A-26: Post-Test Front Close-up View of Driver Dummy**



**Figure A-27: Pre-Test Left Side View of Driver Dummy Showing Belt and Chalking**



**Figure A-28: Pre-Test Left Side View of Driver Dummy Shoulder and Door Top View**



**Figure A-29: Post-Test Left Side View of Driver Dummy Shoulder and Door Top View**



**Figure A-30: Pre-Test Frontal View of Driver Seat Back Prior to Dummy Positioning**



**Figure A-31: Pre-Test Frontal View of Driver Dummy Head and Shoulders in Relation to Head Restraint**




**Figure A-32: Pre-Test Frontal View of Driver Seat Pan Prior to Dummy Positioning**



Figure A-33: Pre-Test Overhead View of Driver Dummy Thighs on Seat Pan



Figure A-34: Pre-Test Placement of Driver Dummy's Feet

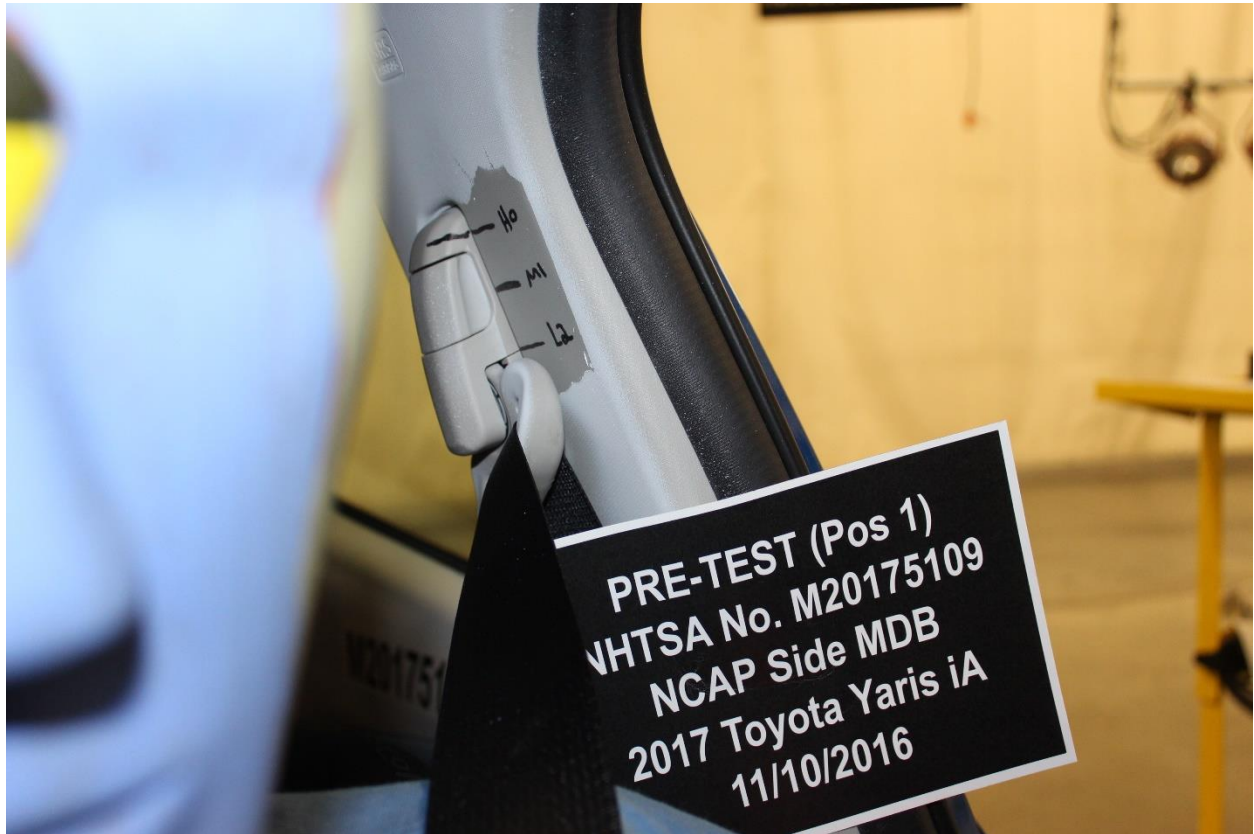

**Figure A-35: Pre-Test View of Belt Anchorage for Driver Dummy**



**Figure A-36: Pre-Test Left Side View of Steering Wheel**



**Figure A-37: View of Disengaged Parking Brake**



**Figure A-38: Pre-Test View of Parking Brake**



Figure A-39: Pre-test Close-Up Left Side View of Driver Seat Track



Figure A-40: Pre-Test Close-Up Left Side View of Driver Seat Back



Figure A-41: Pre-Test Close-Up View of Driver Seat Back or Head Restraint



Figure A-42: Pre-Test Driver Dummy and Door Clearance View



**Figure A-43: Post-Test Driver Dummy and Door Clearance View**



**Figure A-44: Pre-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment**



**Figure A-45: Post-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment**



**Figure A-46: Pre-Test Driver Inner Door Panel View**



**Figure A-47: Post-Test Driver Inner Door Panel View**




**Figure A-48: Post-Test Driver Dummy Close-Up Head Contact with Vehicle View**



**Figure A-49: Post-Test Driver Dummy Close-Up Head Contact with Side Airbag View**



**Figure A-50: Post-Test Driver Dummy Close-Up Torso Contact with Vehicle Interior View**

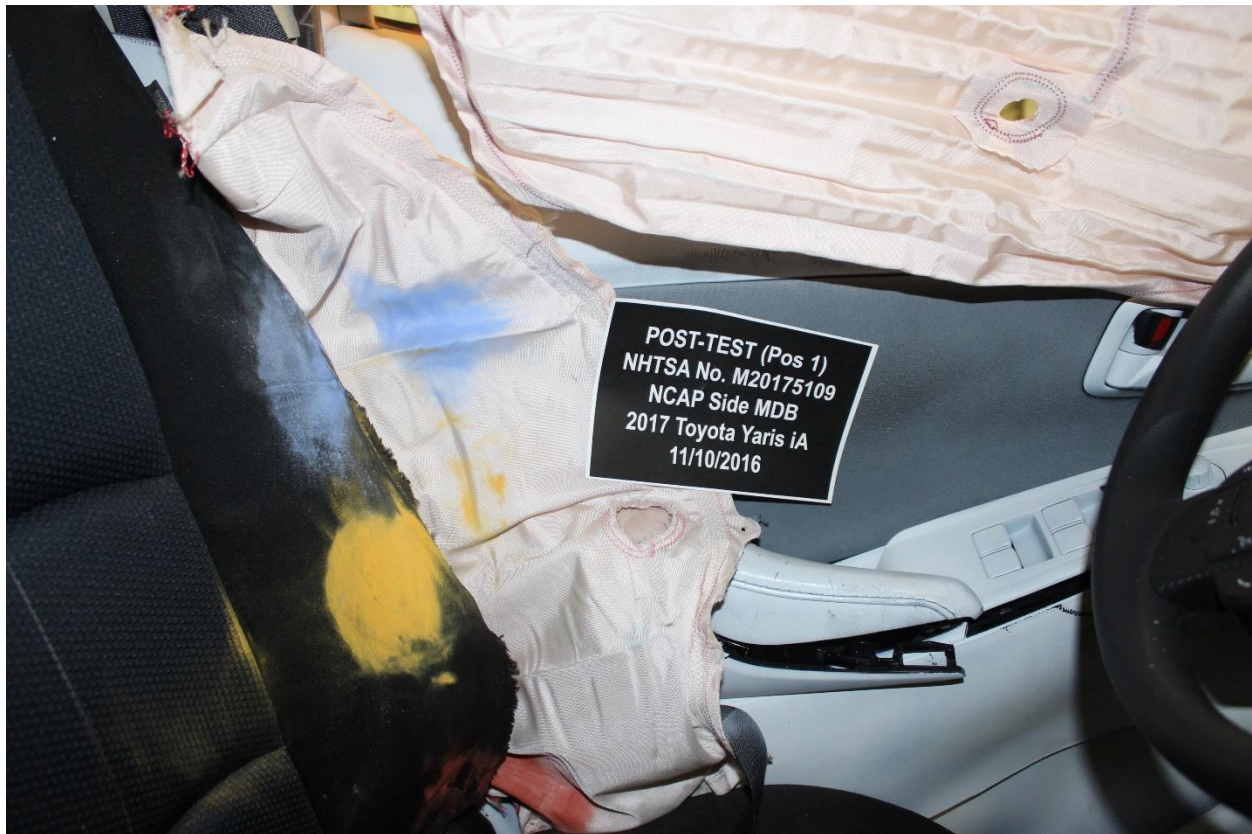

**Figure A-51: Post-Test Driver Dummy Close-Up Torso Contact with Side Airbag View**



**Figure A-52: Post-Test Driver Dummy Close-Up Pelvis Contact View**



**Figure A-53: Post-Test Driver Dummy Close-Up Pelvis Contact with Side Airbag View**



**Figure A-54: Post-Test Driver Dummy Close-Up Knee Contact View**



Figure A-55: Pre-Test Left Side View of Passenger Dummy Showing Belt and Chalking



Figure A-56: Pre-Test Left Side View of Passenger Dummy Shoulder and Door Top View



**Figure A-57: Post-Test Left Side View of Passenger Dummy Shoulder and Door Top View**




**Figure A-58: Pre-Test Frontal View of Rear Passenger Seat Back Prior to Dummy Positioning**



**Figure A-59: Pre-Test Frontal View of Rear Passenger Dummy Head and Shoulders in Relation to Head Restraint**



**Figure A-60: Pre-Test Overhead View of Rear Passenger Seat Pan Prior to Dummy Positioning**

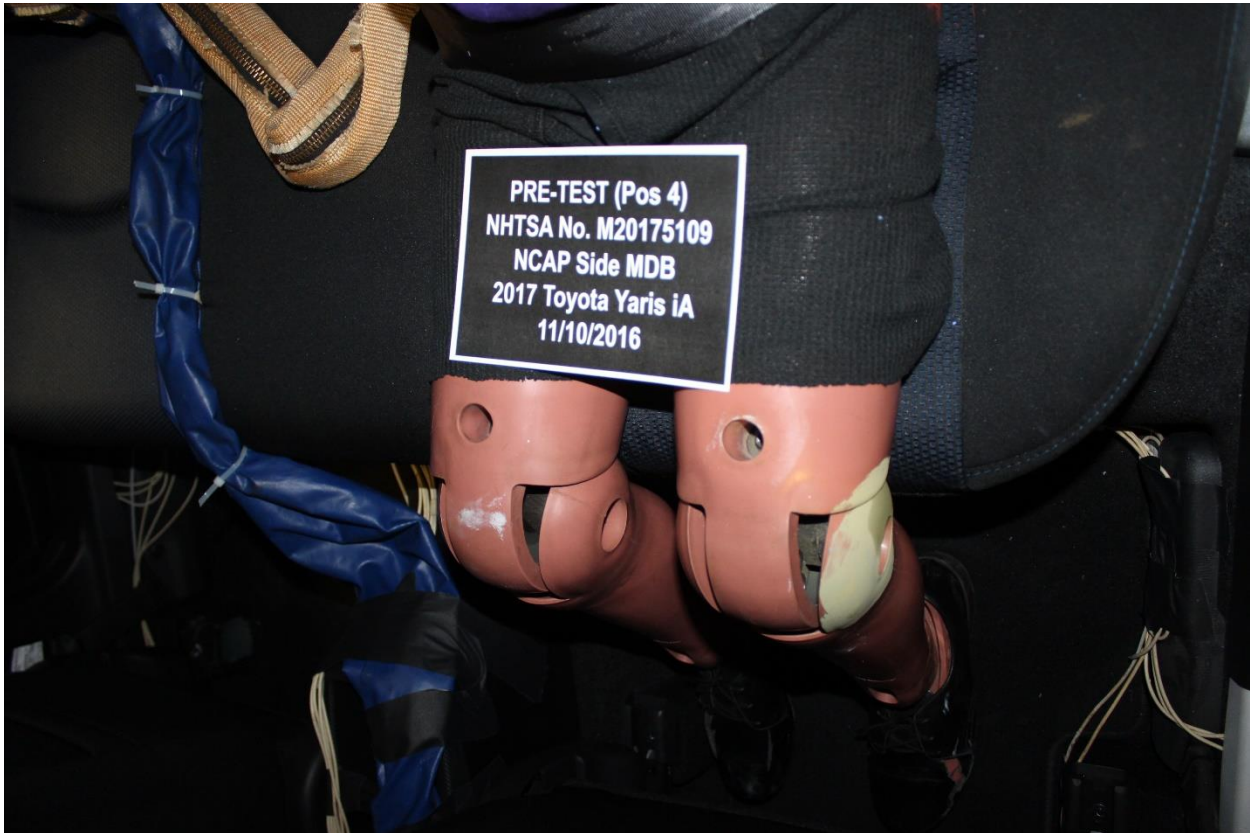

**Figure A-61: Pre-Test Overhead View of Rear Passenger Dummy Thighs on Seat Pan**



**Figure A-62: Pre-Test View of Rear Passenger Dummy's Neck Showing Position of Adjustable Neck Bracket**



PRE-TEST (Pos 4)  
NHTSA No. M20175109  
NCAP Side MDB  
2017 Toyota Yaris iA  
11/10/2016

Figure A-63: Pre-Test View of Rear Passenger Dummy's Head Showing Dummy's Head is Level



PRE-TEST (Pos 4)  
NHTSA No. M20175109  
NCAP Side MDB  
2017 Toyota Yaris iA  
11/10/2016

Figure A-64: Pre-Test Placement of Rear Passenger Dummy's Feet



**Figure A-65: Pre-Test View of Belt Anchorage for Rear Passenger Dummy**



**Figure A-66: Pre-Test Close-Up Left Side View of Rear Passenger Seat Track**



Figure A-67: Pre-Test Close-Up Left Side View of Rear Passenger Seat Back

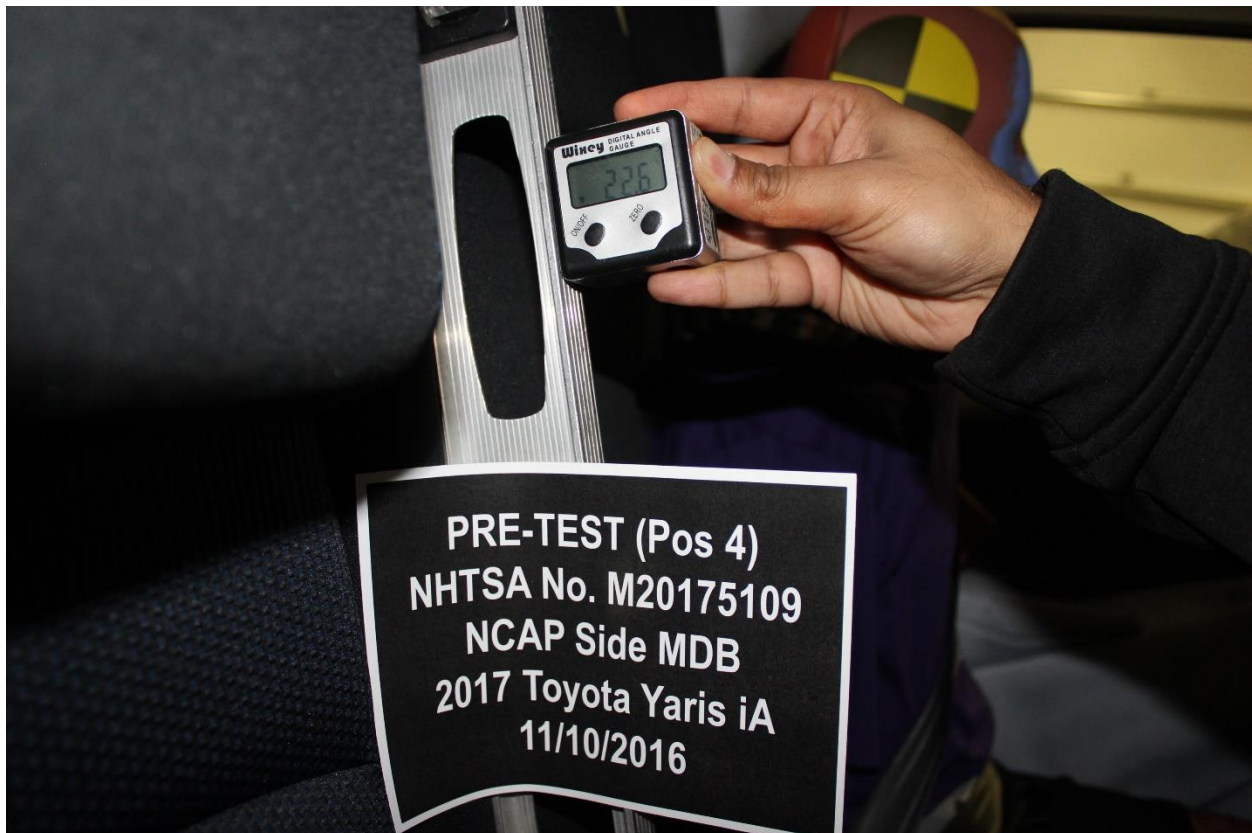


Figure A-68: Pre-Test Close-Up View of Rear Passenger Seat Back or Head Restraint



**Figure A-69: Pre-Test Passenger Dummy and Door Clearance View**



**Figure A-70: Post-Test Passenger Dummy and Door Clearance View**



**Figure A-71: Pre-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment**



**Figure A-72: Post-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment**



**Figure A-73: Pre-Test Passenger Inner Door Panel View**



**Figure A-74: Post-Test Passenger Inner Door Panel View**



**Figure A-75: Post-Test Rear Passenger Dummy Close-Up Head Contact with Vehicle View**



**Figure A-76: Post-Test Rear Passenger Dummy Close-Up Head Contact with Side Airbag View**



**Figure A-77: Post-Test Rear Passenger Dummy Close-Up Torso Contact with Vehicle Interior View**

# Photo Not Applicable

**Figure A-78: Post-Test Rear Passenger Dummy Close-Up Torso Contact with Side Airbag View**



**Figure A-79: Post-Test Rear Passenger Dummy Close-Up Pelvis Contact View**

# Photo Not Applicable

**Figure A-80: Post-Test Rear Passenger Dummy Close-Up Pelvis Contact with Side Airbag View**



Figure A-81: Post-Test Rear Passenger Dummy Close-Up Knee Contact View



Figure A-82: Pre-Test View of Fuel Filler Cap or Fuel Filler Neck



Figure A-83: Post-Test View of Fuel Filler Cap or Fuel Filler Neck



Figure A-84: Pre-Test Front View of MDB Impactor Face



**Figure A-85: Post-Test Front View of MDB Impactor Face**




**Figure A-86: Pre-Test Top View of MDB Impactor Face**



**Figure A-87: Post-Test Top View of MDB Impactor Face**



**Figure A-88: Pre-Test Left Side View of MDB Impactor Face**

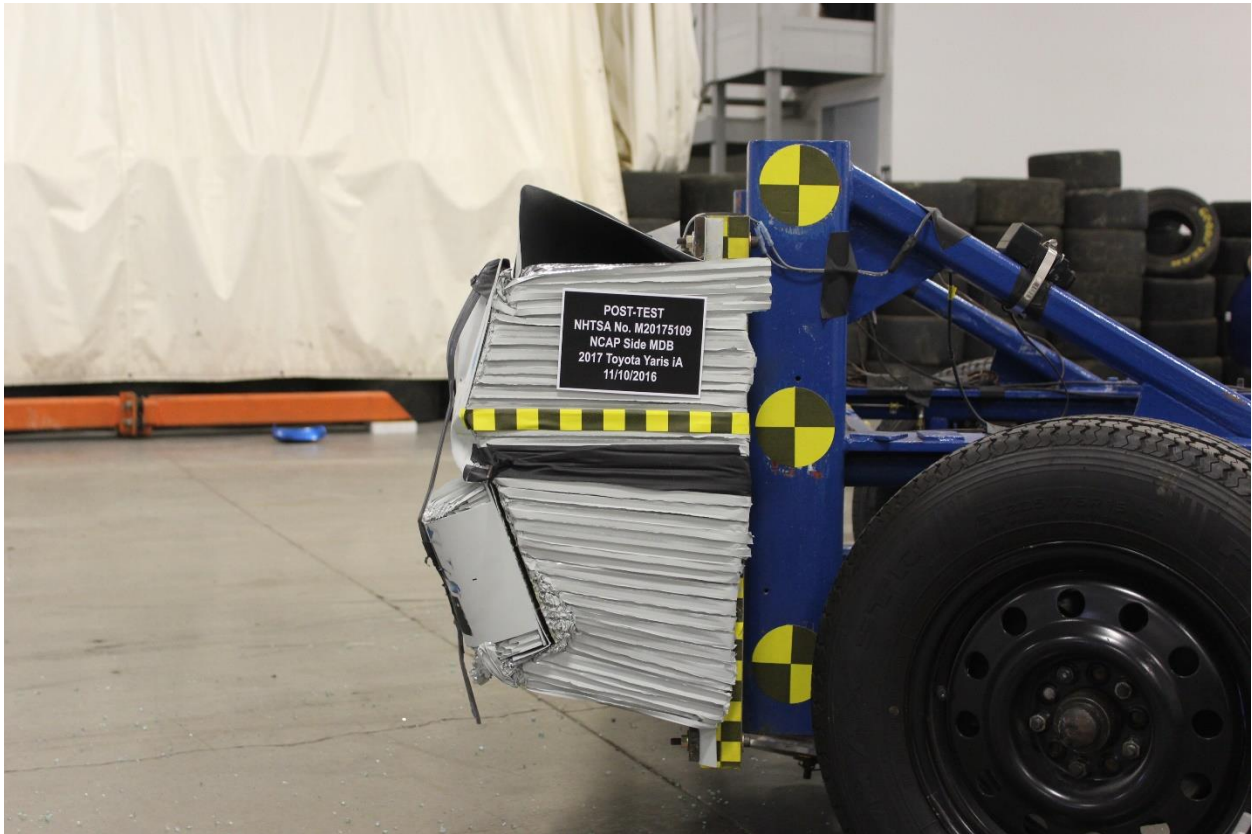

**Figure A-89: Post-Test Left Side View of MDB Impactor Face**



**Figure A-90: Pre-Test Right Side View of MDB Impactor Face**

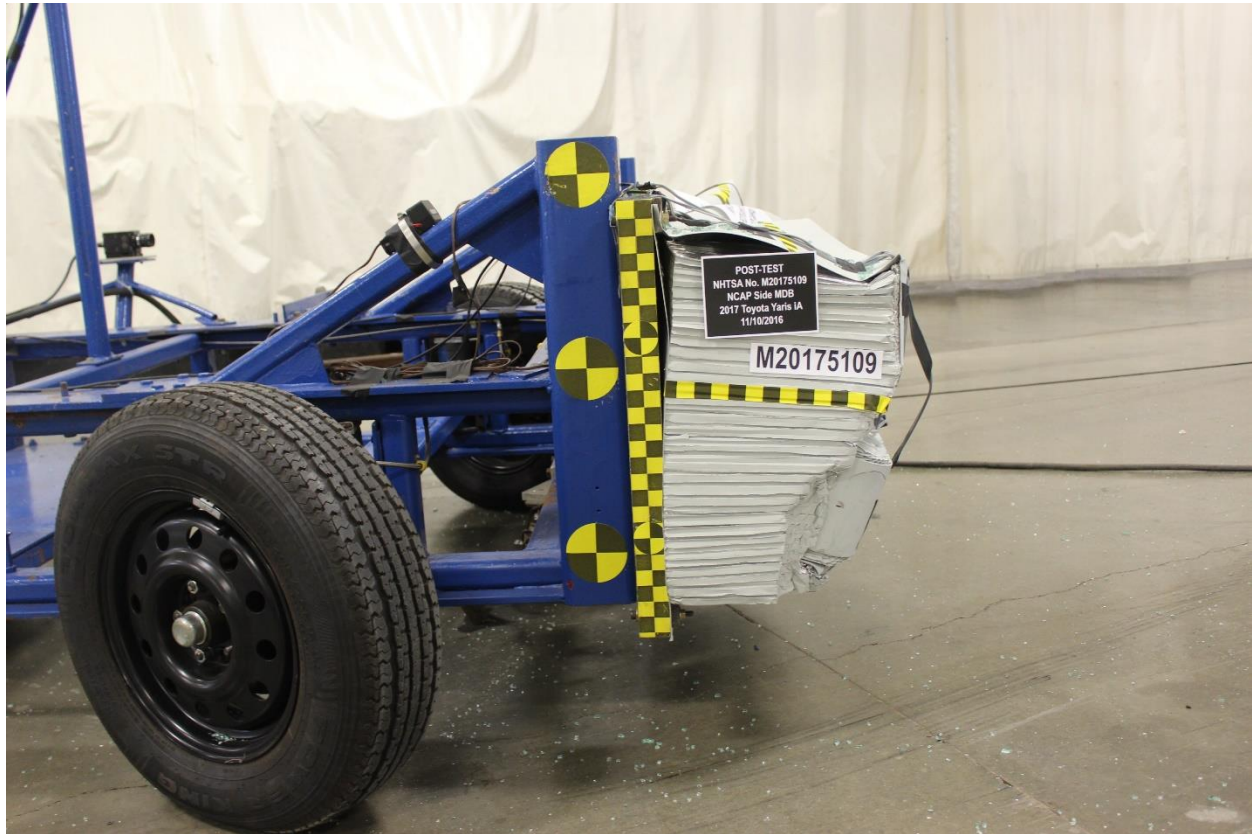


Figure A-91: Post-Test Right Side View of MDB Impactor Face

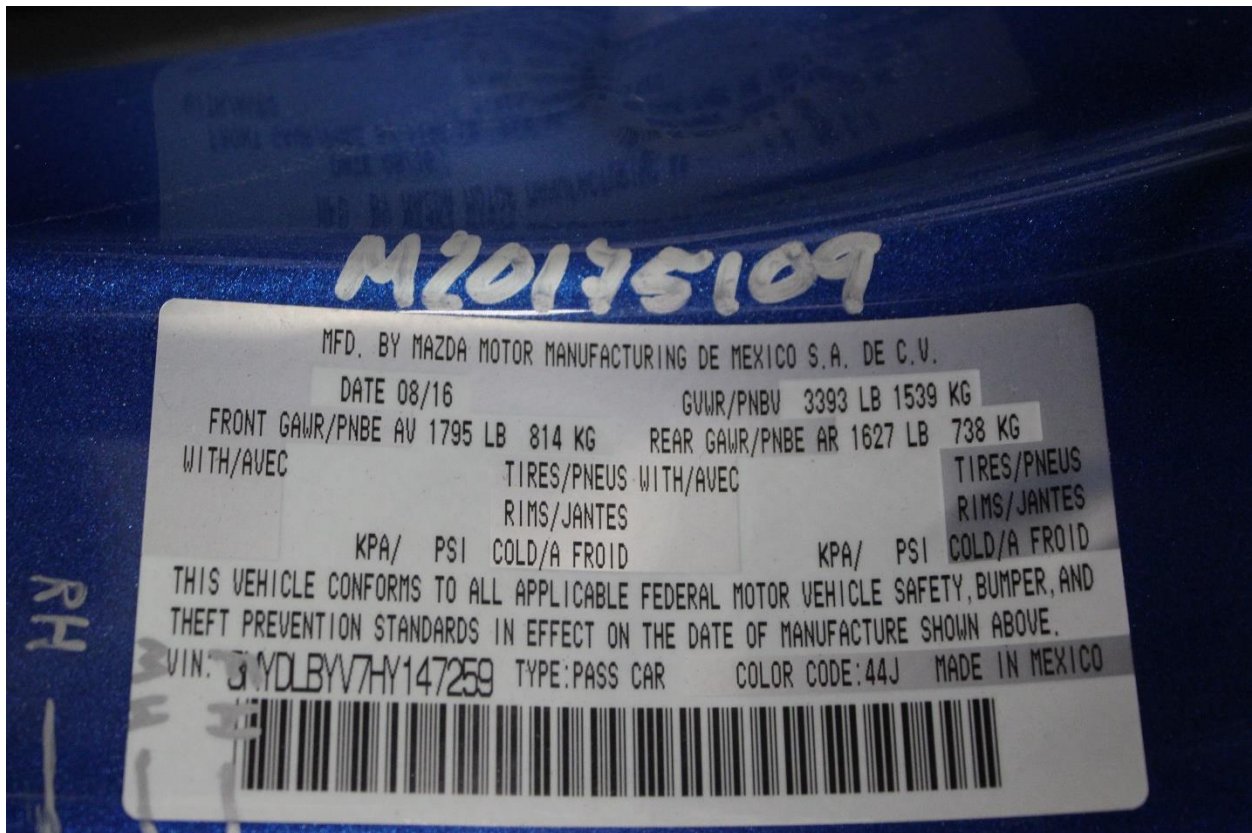


Figure A-92: Close-Up View of Vehicle's Certification Label



Figure A-93: Close-Up View of Vehicle's Tire Information Placard or Label

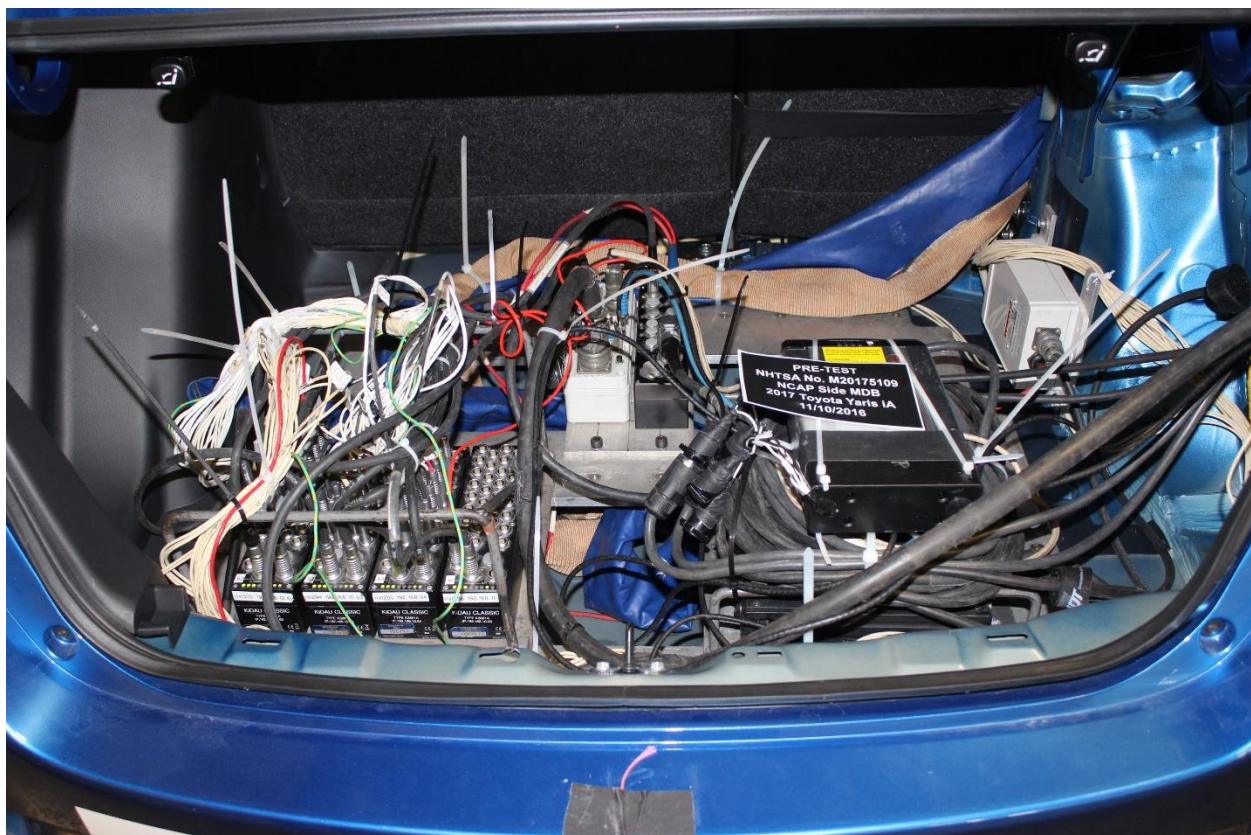


Figure A-94: Pre-Test Ballast View



**Figure A-95: Post-Test Primary and Redundant Speed Trap Read-Out**



**Figure A-96: FMVSS No. 301 Static Rollover 0 Degrees**



**Figure A-97: FMVSS No. 301 Static Rollover 90 Degrees**



**Figure A-98: FMVSS No. 301 Static Rollover 180 Degrees**



**Figure A-99: FMVSS No. 301 Static Rollover 270 Degrees**



**Figure A-100: FMVSS No. 301 Static Rollover 360 Degrees**



Figure A-101: Impact Event

<p><b>TOYOTA</b> Let's Go Places</p> <p>DESC: <b>YARIS iA</b> 4-DOOR SEDAN VIN: <b>3MYDLBYV7HY147259</b> YR/MDL: 2017/6262A CLR: SAPPHIRE/AZ70 (044J/70) FINAL ASSEMBLY POINT: SALAMANCA, MEXICO</p>		<p><b>STANDARD EQUIPMENT</b></p> <p><b>MECHANICAL AND PERFORMANCE</b></p> <ul style="list-style-type: none"> <li>- 1.5L 4-Cyl DOHC 16-Valve 108HP</li> <li>- 6-Speed Automatic Transmission</li> <li>- Sport Drive Mode</li> <li>- Front Wheel Drive, Direct Injection System</li> <li>- Ind MacPherson Strut Front Suspension</li> <li>- Torsion Beam Rear Suspension</li> <li>- 18" Alloy Wheels with 165/60R16 Tires</li> </ul> <p><b>SAFETY AND CONVENIENCE</b></p> <ul style="list-style-type: none"> <li>- Low Speed Pre-Collision System</li> <li>- Dynamic Stability Control (DSC), Trac Control Syst (TCS), Anti-Lock Brake Syst (ABS), Electronic Brake Force Dist (EBD), Brake Assist (BA)</li> <li>- Dr &amp; Fr Side Airbag Syst, Dr &amp; Fr Side Curtain Airbags</li> <li>- LATCH Lower Anchor &amp; Tether for Children</li> <li>- Integrated Rear-View Backup Camera Syst</li> <li>- Tire Pressure Monitoring System (TPMS)</li> </ul> <p><b>EXTERIOR</b></p> <ul style="list-style-type: none"> <li>- Halogen Headlights &amp; Daytime Running Lts</li> <li>- Var Intermittent Front Windshield Wipers</li> <li>- Color-Keyed Power Exterior Mirrors w/LED Turn Signal Ind; Chrome-Tipped Exhaust</li> </ul> <p><b>INTERIOR</b></p> <ul style="list-style-type: none"> <li>- Fabric-Trimmed 6-Way Adj, Drivers Seat</li> <li>- 4-Way Adjustable Front Passenger Seat</li> <li>- 7" Color Touch-Screen Display Audio, Multi-Function Commander Control, AM/FM/HD Radio, 8 Speakers, AUX/2 USB Ports w/iPod Connect, Hands Free Phone &amp; Music Streaming via Bluetooth, Voice Recog, Connected Service Suite w/Pandora, Aha &amp; Stitcher Audio</li> <li>- Remote Keyless Entry w/Push Button Start</li> <li>- Cruise Control</li> <li>- Pwr Door Locks, Pwr Windows w/Dr Side One-Touch Auto Up/Down w/Liam Projection</li> <li>- 11.7" Telescopic Steer Whl w/Audio Cntrlr</li> <li>- Speedometer &amp; Digital Tachometer</li> <li>- Air Conditioning, Rear Window Defogger</li> <li>- 100% Spill Proof-Fuel Door Cap</li> <li>- ***Full Tank of Gas***</li> </ul>	<p><b>MANUFACTURER'S SUGGESTED RETAIL PRICE \$17,050.00</b></p> <p><b>OPTIONAL EQUIPMENT</b></p> <p>FE 50 State Emissions</p>
<p><b>GOVERNMENT 5-STAR SAFETY RATINGS</b></p> <p>This vehicle has not been rated by the government for overall vehicle score, frontal crash, side crash or rollover risk.</p> <p>Star ratings range from 1 to 5 stars (★ ★ ★ ★ ★) with 5 being the highest. Source: National Highway Traffic Safety Administration (NHTSA) <a href="http://www.safercar.gov">www.safercar.gov</a> or 1-888-327-4236</p>		<p><b>DELIVERY PROCESSING AND HANDLING FEE 865.00</b></p>	
<p><b>EPA DOT Fuel Economy and Environment</b> Gasoline Vehicle</p> <p><b>Fuel Economy</b></p> <p><b>35 MPG</b> Subcompact range from 15 to 113 MPG. The best vehicles earn 113 MPG.</p> <p><b>32</b> <b>40</b> combined city/hwy city highway</p> <p><b>2.9</b> gallons per 100 miles</p>		<p><b>You save \$1,750 in fuel costs over 5 years compared to the average new vehicle.</b></p>	
<p><b>Annual fuel cost \$1,050</b></p> <p>Fuel Economy &amp; Greenhouse Gas Rating (EPA est.)</p> <p>1 8 10 10 Best</p> <p>The vehicle emits 240 grams CO2 per mile. The best emits 0 grams per mile (EPA est.). Producing and distributing fuel also emits CO2.</p>		<p><b>Smog Rating (EPA est.)</b></p> <p>6 10 Best</p>	
<p><b>fuel economy.gov</b> Calculate personalized estimates and compare vehicles</p>		<p><b>QR Code</b></p> <p><b>Scanphone QR Code</b></p>	
<p><b>fuel economy.gov</b> Calculate personalized estimates and compare vehicles</p>		<p><b>TOTAL \$17,915.00</b></p> <p>The new Toyota Yaris iA Sedan provides 200/28/35 mpg (city/hwy/combined) and 3-year/50,000-mile powertrain coverage, plus 5-year/100,000-mile corrosion performance coverage. See Warranty and Maintenance Guide for details. An adequate service contract may be available for the vehicle.</p> <p>Ask dealer for detailed retail price including manufacturer's recommended pre-delivery service. Gasoline, license and title fees, applicable taxes and title fees and dealer and distributor installed options and accessories are not included in the manufacturer's suggested retail price.</p> <p>ToyotaCare, which covers normal factory scheduled maintenance for two years or 25,000 miles, whichever occurs first, is included as part of the sales price of the vehicle for every five years. See participating dealer for complete coverage details.</p> <p>Delivered by Truck to: 31088 NORTH TOWN TOYOTA 1135 MILLERSPORT HIGHWAY AMHERST NY 14226</p>	

Figure A-102: Monroney Label

### Head Restraints


Your vehicle is equipped with head restraints on all outboard seats and the rear center seat. The head restraints are intended to help protect you and the passengers from neck injury.

#### WARNING

Always drive with the head restraints installed when seats are being used and make sure they are properly adjusted. In addition, always raise the head restraints on all rear seats when they are being used. Driving with the head restraints adjusted too low or removed is dangerous. With no support behind your head, your neck could be seriously injured in a collision.

#### Height Adjustment


Adjust the head restraint so that the center is even with the top of the passenger's ears.



IN11Z2006


To raise a head restraint, pull it up to the desired position. To lower the head restraint, press the stop-catch release, then push the head restraint down.

#### Front outboard seat



IN11Z2007

Figure A-103: Driver Head Restraint Use and Adjustment Information from Vehicle Owner's Manual

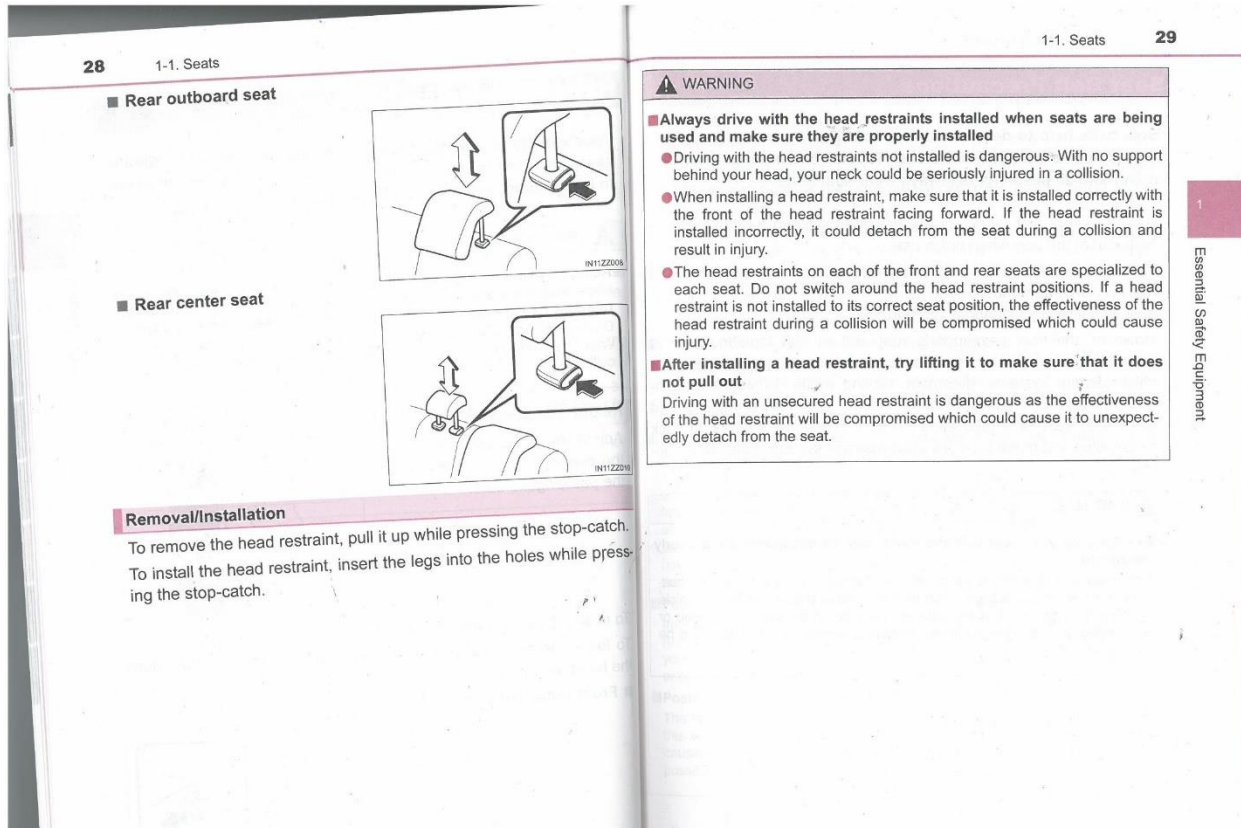

#### Removal/Installation

To remove the head restraint, pull it up while pressing the stop-catch. To install the head restraint, insert the legs into the holes while pressing the stop-catch.

#### WARNING

- Always drive with the head restraints installed when seats are being used and make sure they are properly installed
- Driving with the head restraints not installed is dangerous. With no support behind your head, your neck could be seriously injured in a collision.
- When installing a head restraint, make sure that it is installed correctly with the front of the head restraint facing forward. If the head restraint is installed incorrectly, it could detach from the seat during a collision and result in injury.
- The head restraints on each of the front and rear seats are specialized to each seat. Do not switch around the head restraint positions. If a head restraint is not installed to its correct seat position, the effectiveness of the head restraint during a collision will be compromised which could cause injury.
- After installing a head restraint, try lifting it to make sure that it does not pull out. Driving with an unsecured head restraint is dangerous as the effectiveness of the head restraint will be compromised which could cause it to unexpectedly detach from the seat.

Figure A-104: Left Rear Passenger Head Restraint Use and Adjustment Information from Vehicle Owner's Manual-Rear Restraints Not Adjustable

## **APPENDIX B**

### VEHICLE AND DUMMY RESPONSE DATA PLOTS

## TABLE OF DATA PLOTS

### Driver & Passenger Dummy Instrumentation Plots

<b>Fig.</b>	<b>Description</b>	<b>Page</b>
1	Driver Head Acceleration (X) Primary vs. Time	B-5
2	Driver Head Acceleration (Y) Primary vs. Time	B-5
3	Driver Head Acceleration (Z) Primary vs. Time	B-5
4	Driver Head Resultant Acceleration Primary vs. Time	B-5
5	Driver Upper Thorax Rib Deflection (Y) vs. Time	B-6
6	Driver Middle Thorax Rib Deflection (Y) vs. Time	B-6
7	Driver Lower Thorax Rib Deflection (Y) vs. Time	B-6
8	Driver Thorax Rib Deflection Maximum vs. Time	B-6
9	Driver Anterior Abdominal Force (Y) vs. Time	B-7
10	Driver Middle Abdominal Force (Y) vs. Time	B-7
11	Driver Posterior Abdominal Force (Y) vs. Time	B-7
12	Driver Total Abdominal Force (Y) vs. Time	B-7
13	Driver Pubic Symphysis Force (Y) vs. Time	B-8
14	Passenger Head Acceleration (X) vs. Time Primary	B-8
15	Passenger Head Acceleration (Y) vs. Time Primary	B-8
16	Passenger Head Acceleration (Z) vs. Time Primary	B-8
17	Passenger Head Resultant Acceleration Primary vs. Time	B-9
18	Passenger Lower Spine T12 Acceleration (X) vs. Time	B-9
19	Passenger Lower Spine T12 Acceleration (Y) vs. Time	B-9
20	Passenger Lower Spine T12 Acceleration (Z) vs. Time	B-9
21	Passenger Lower Spine T12 Resultant Acceleration vs. Time	B-10
22	Passenger Iliac Force on Impact Side (Y) vs. Time	B-10
23	Passenger Acetabulum Force on Impact Side (Y) vs. Time	B-10
24	Passenger Total Pelvic Force on Impact Side (Y) vs. Time	B-10

The following additional data for this test can be obtained from the Research and Development section of the NHTSA website. The website can be found at [www.NHTSA.dot.gov](http://www.NHTSA.dot.gov).

#### **Additional Driver & Passenger Dummy Instrumentation Data**





Driver Lower Spine T12 Acceleration (X)  
Driver Lower Spine T12 Acceleration (Y)  
Driver Lower Spine T12 Acceleration (Z)  
Passenger Upper Thorax Rib Deflection (Y)  
Passenger Middle Thorax Rib Deflection (Y)  
Passenger Lower Thorax Rib Deflection (Y)  
Passenger Upper Abdomen Rib Deflection (Y)  
Passenger Lower Abdomen Rib Deflection (Y)  
Driver Head Acceleration Redundant (X)  
Driver Head Acceleration Redundant (Y)  
Driver Head Acceleration Redundant (Z)  
Passenger Head Acceleration Redundant (X)  
Passenger Head Acceleration Redundant (Y)  
Passenger Head Acceleration Redundant (Z)





#### **Vehicle Instrumentation Data**





Vehicle Center of Gravity Acceleration (X)  
Vehicle Center of Gravity Acceleration (Y)  
Vehicle Center of Gravity Acceleration (Z)  
Right Side Sill at Front Seat Acceleration (X)  
Right Side Sill at Front Seat Acceleration (Y)  
Right Side Sill at Front Seat Acceleration (Z)  
Right Side Sill at Rear Seat Acceleration (X)  
Right Side Sill at Rear Seat Acceleration (Y)  
Right Side Sill at Rear Seat Acceleration (Z)  
Left Side Sill at Front Seat Acceleration (Y)  
Left Side Sill at Rear Seat Acceleration (Y)  
Lower A-Post Acceleration (Y)  
Middle A-Post Acceleration (Y)  
Lower B-Post Acceleration (Y)  
Middle B-Post Acceleration (Y)  
Front Seat Track Acceleration (Y)  
Rear Seat Structure Acceleration (Y)  
Right Rear Occupant Compartment Acceleration (Y)  
Engine Block (X)  
Engine Block (Y)  
Rear Floorpan Above Axle Acceleration (X)  
Rear Floorpan Above Axle Acceleration (Y)  
Rear Floorpan Above Axle Acceleration (Z)





## **MDB Instrumentation Data**

MDB Center of Gravity Acceleration (X)  
MDB Center of Gravity Acceleration (Y)  
MDB Center of Gravity Acceleration (Z)  
MDB Rear Acceleration (X)  
MDB Rear Acceleration (Y)  
Left MDB Contact Switch  
Right MDB Contact Switch

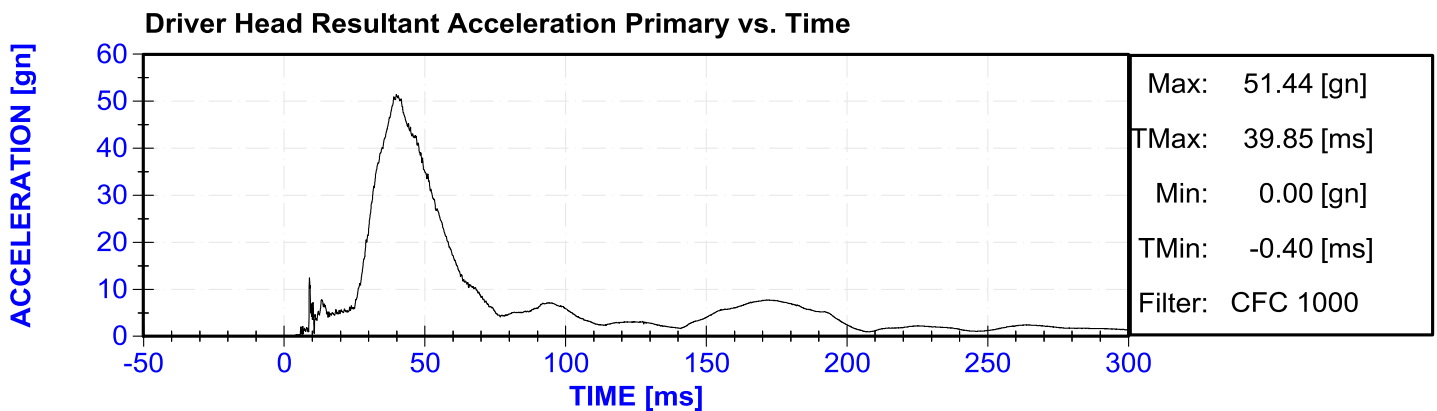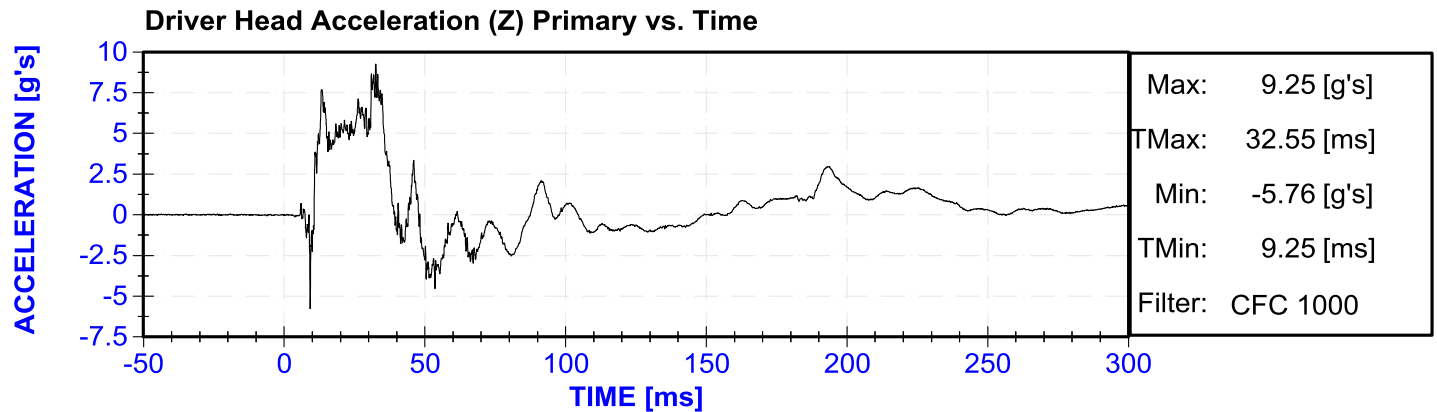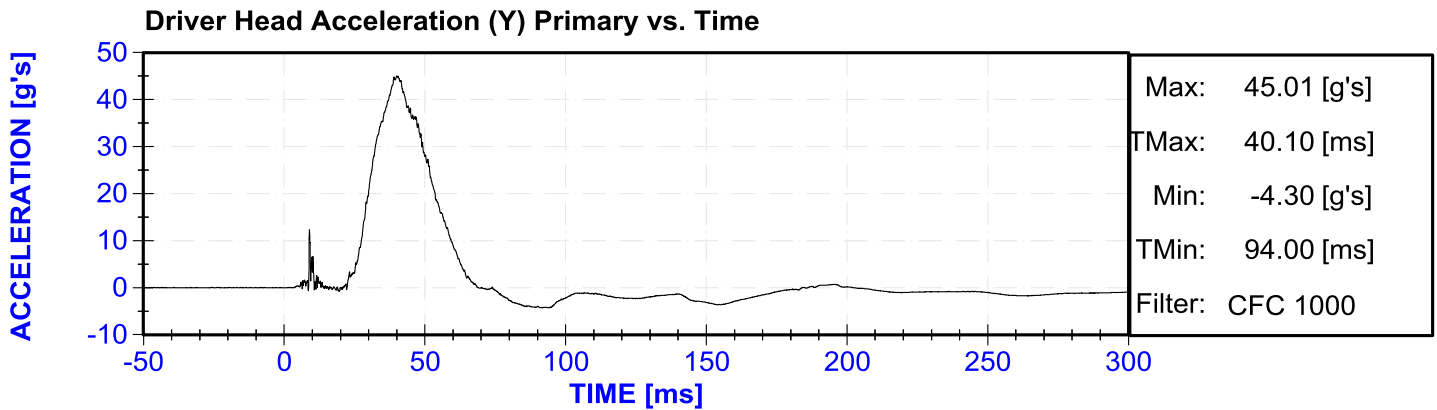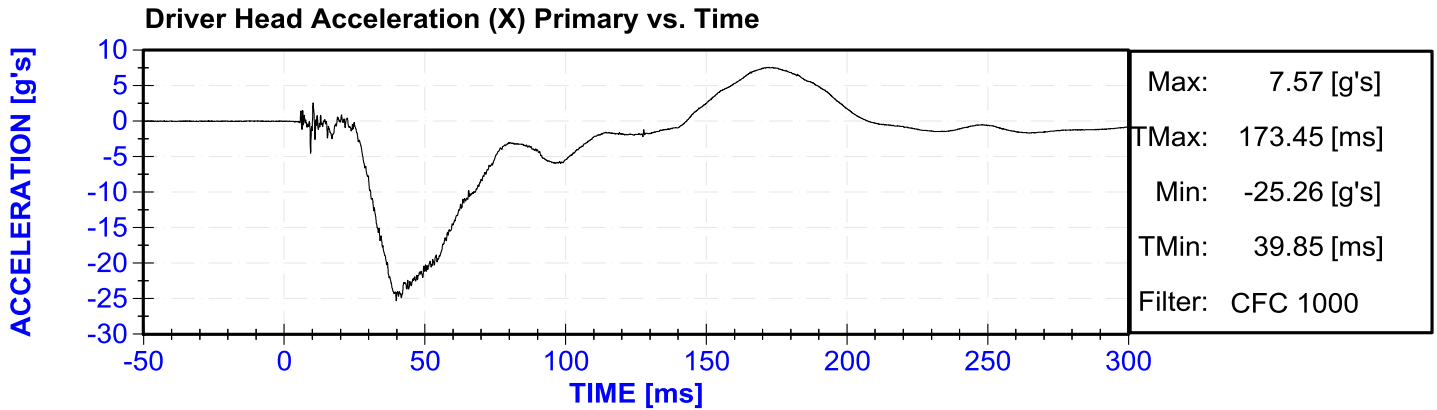


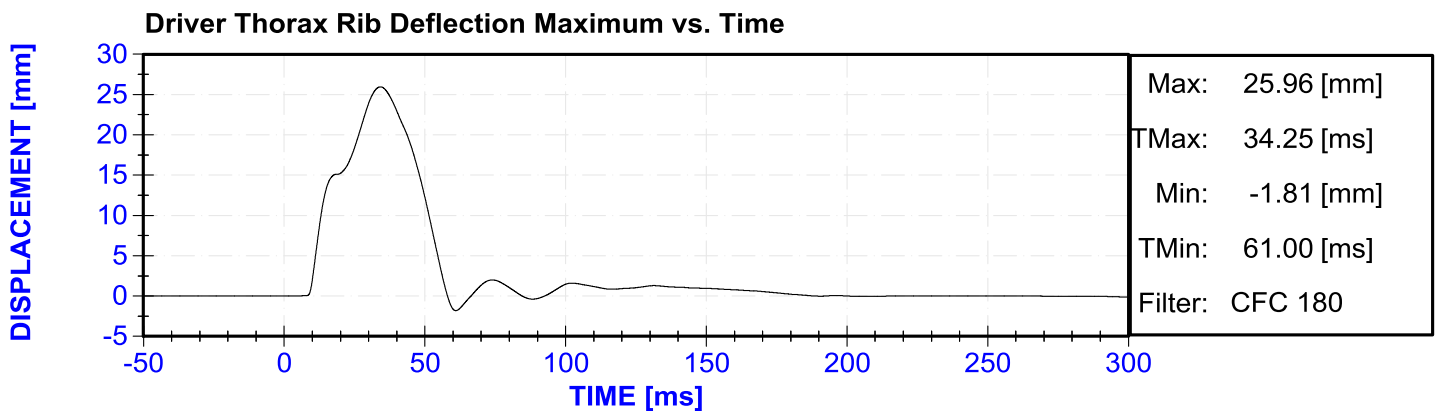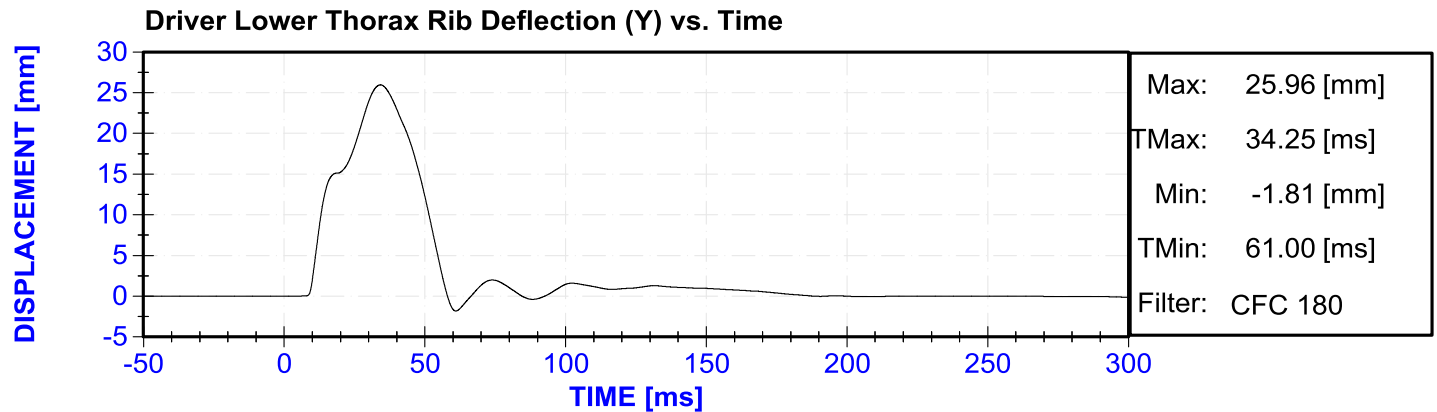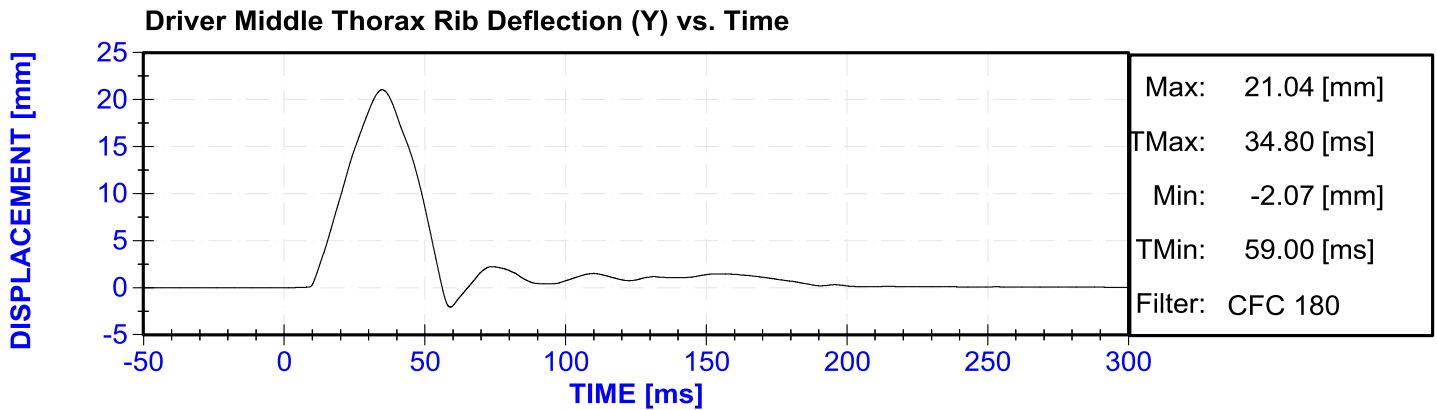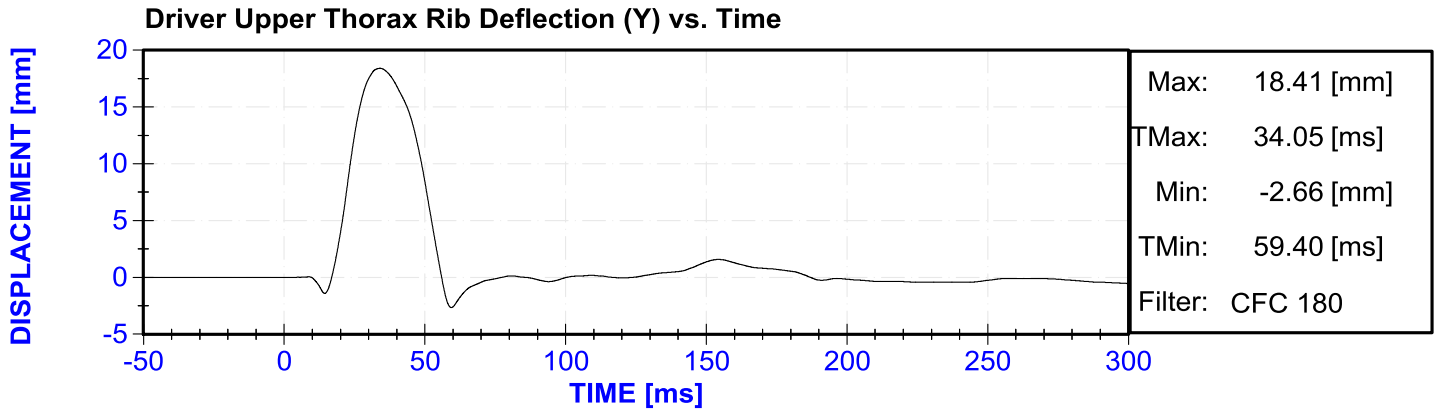

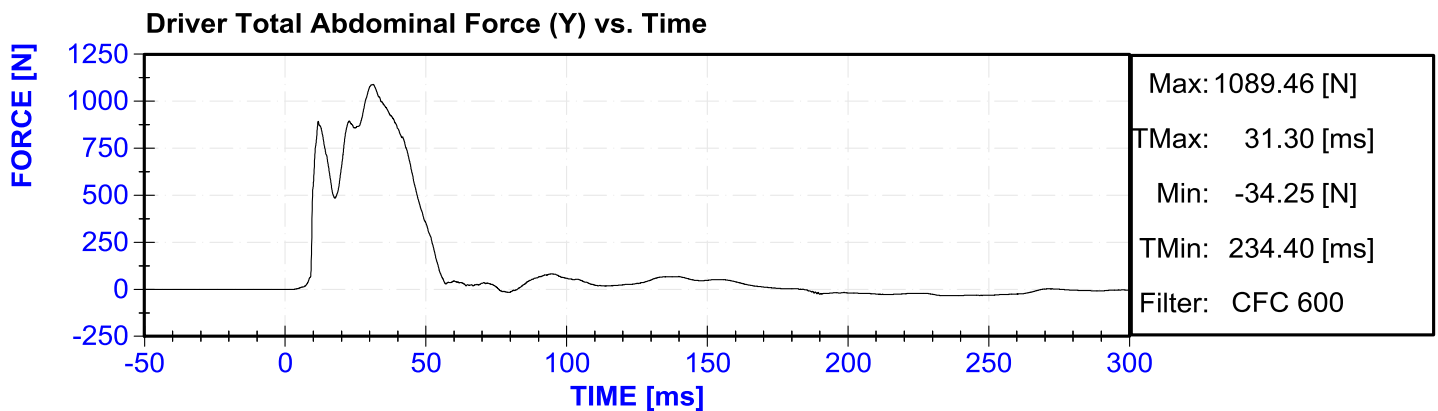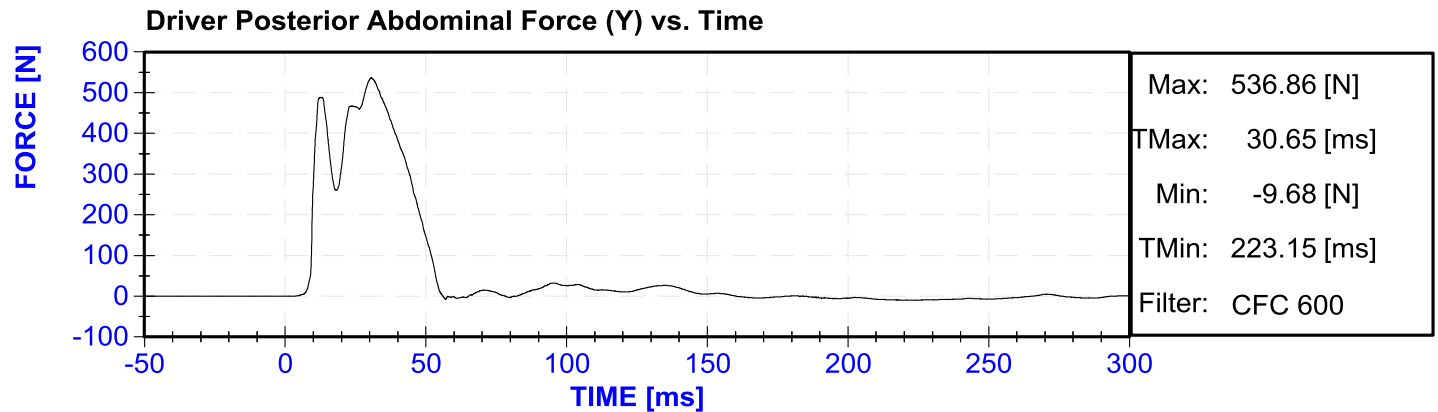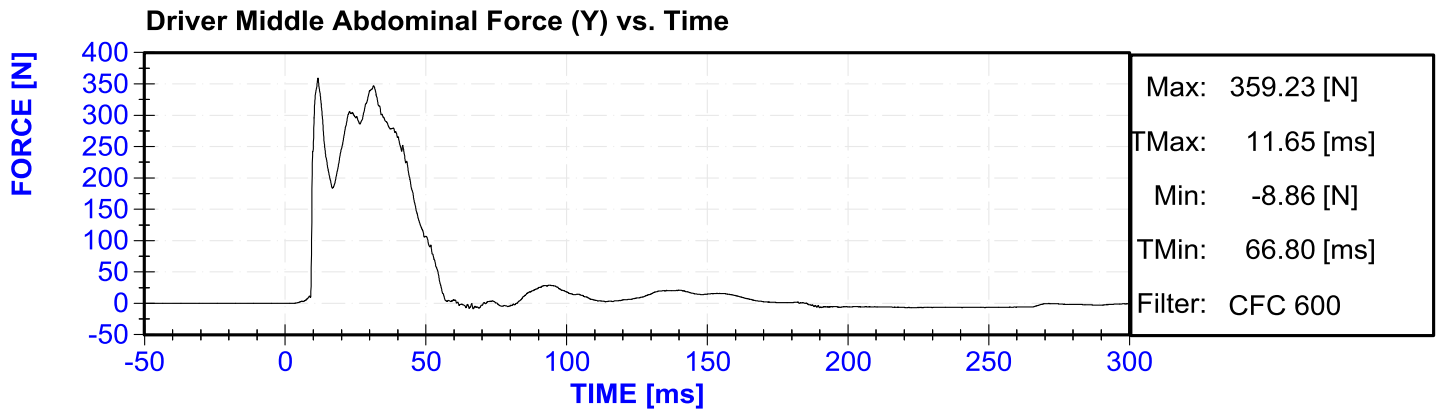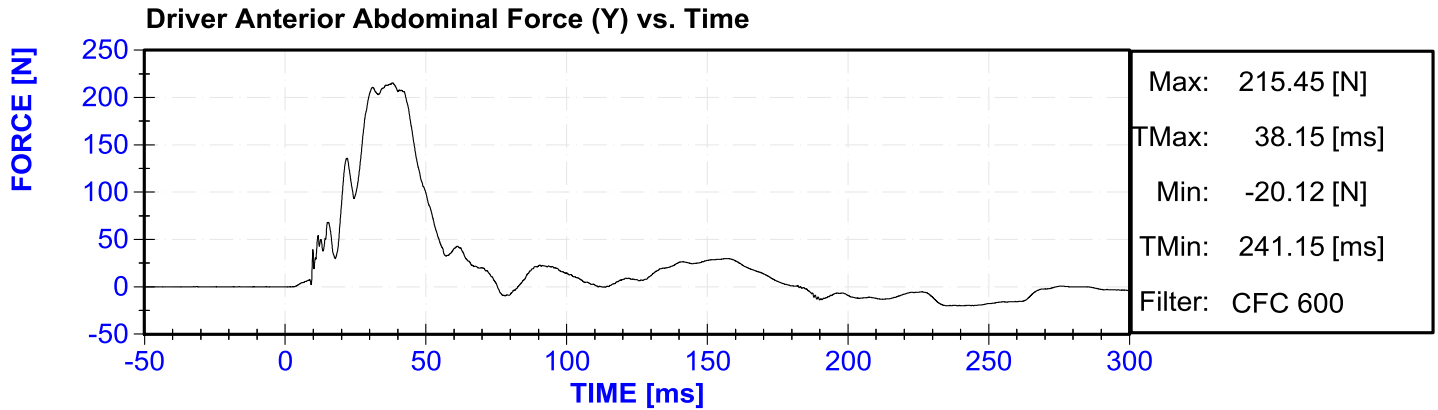


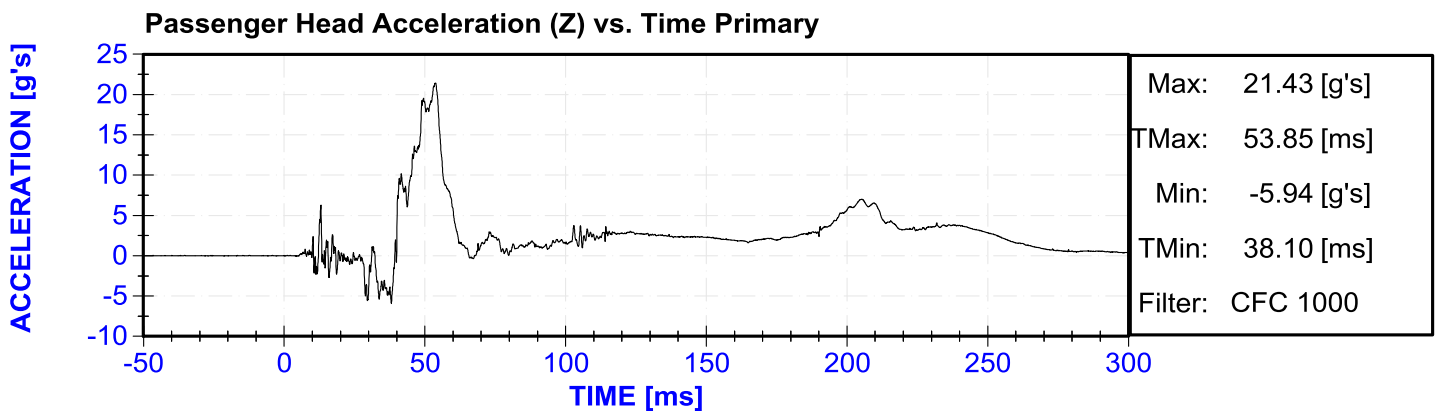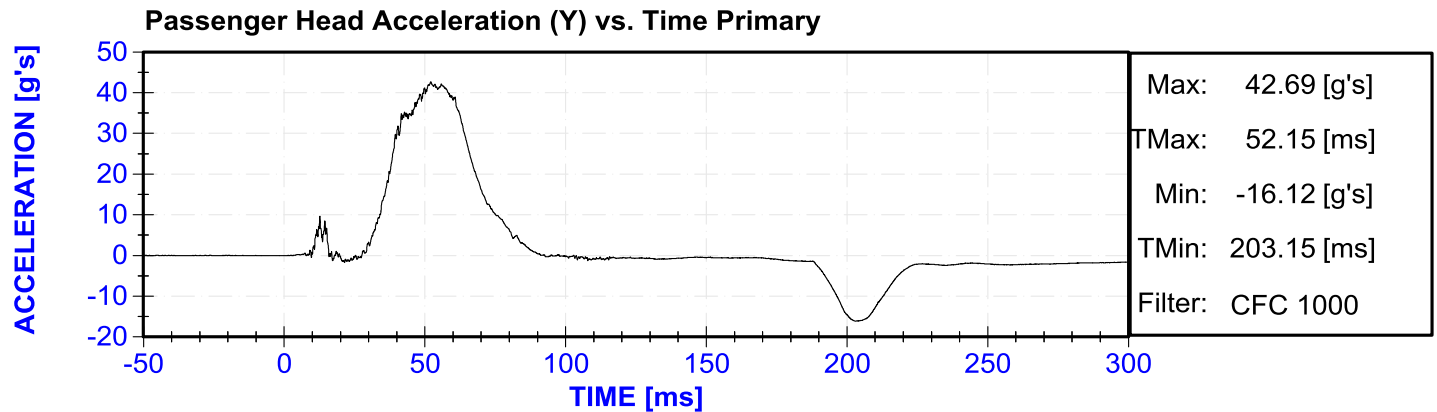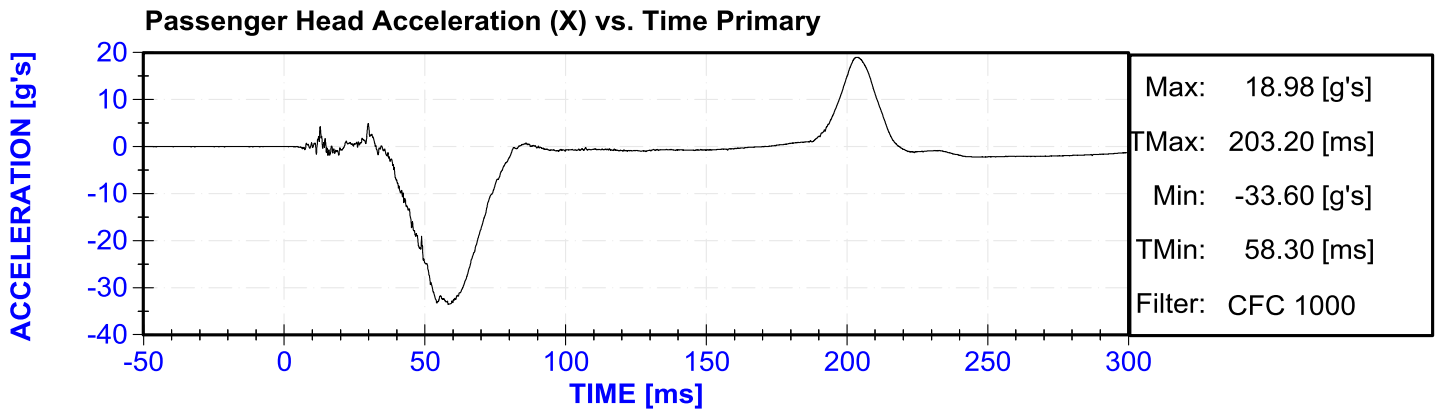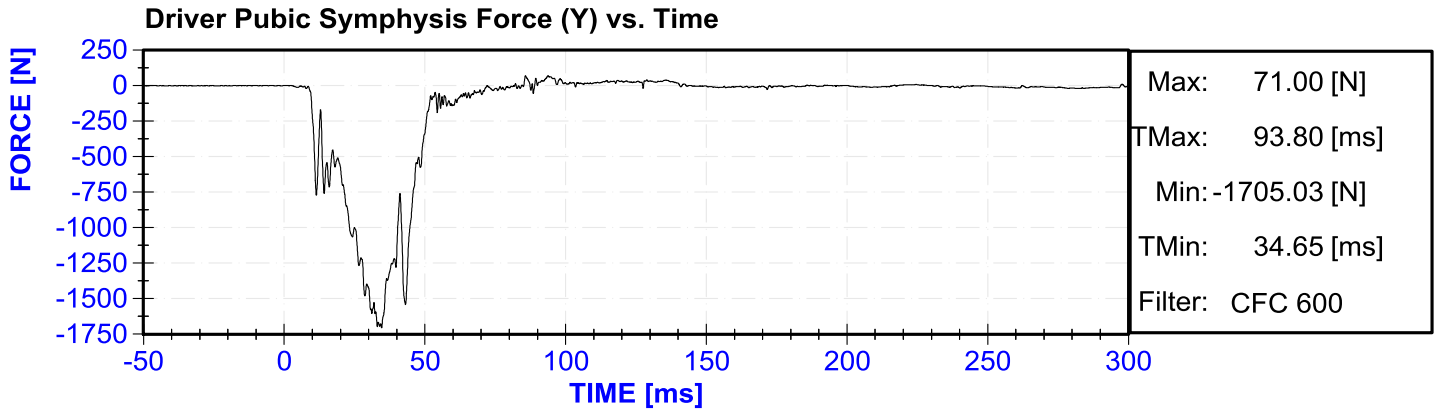


Passenger Head Resultant Acceleration Primary vs. Time

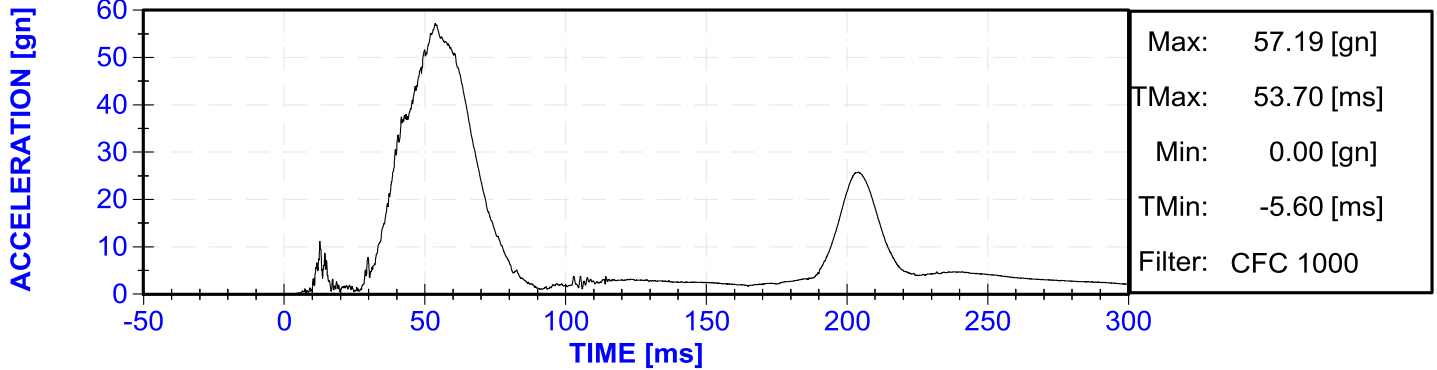


Passenger Lower Spine T12 Acceleration (X) vs. Time




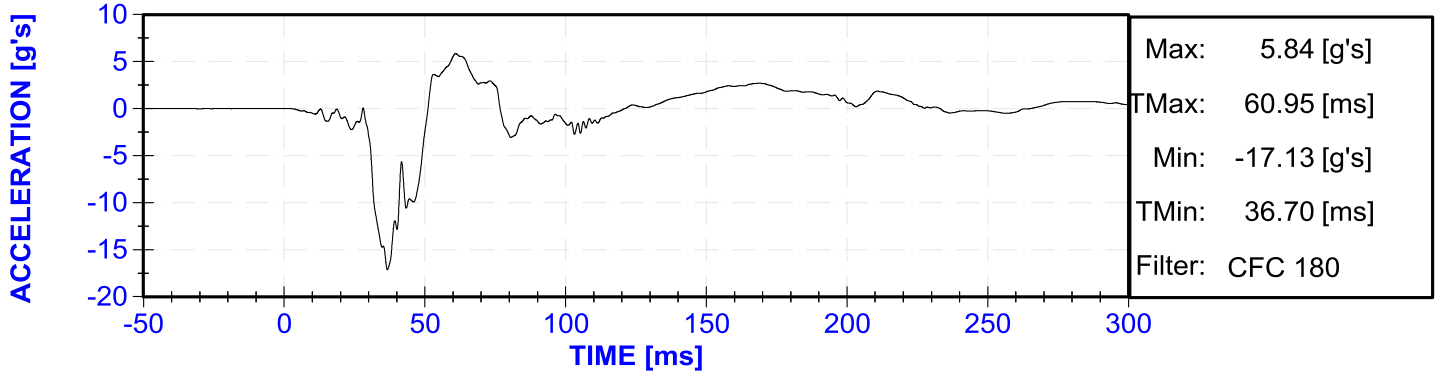


Passenger Lower Spine T12 Acceleration (Y) vs. Time

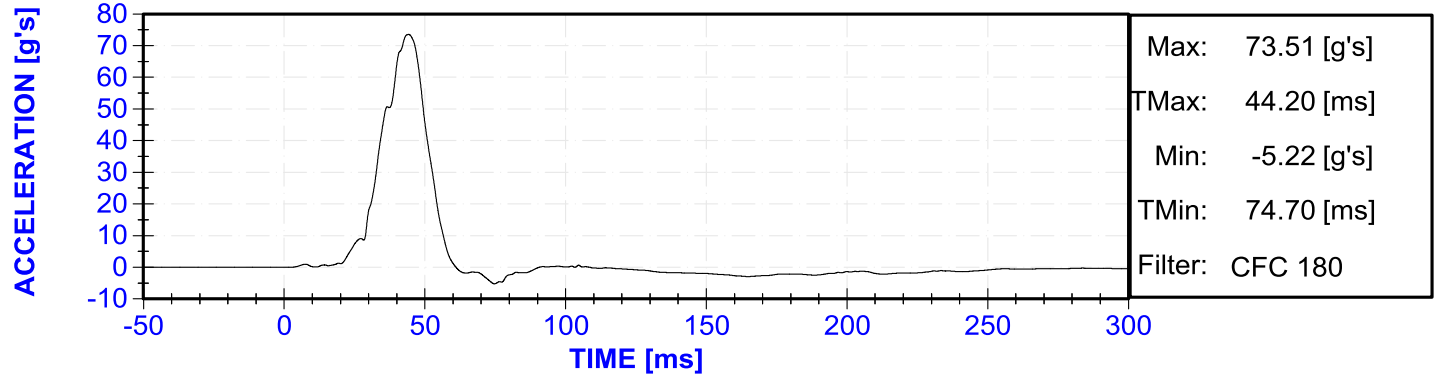

Passenger Lower Spine T12 Acceleration (Z) vs. Time

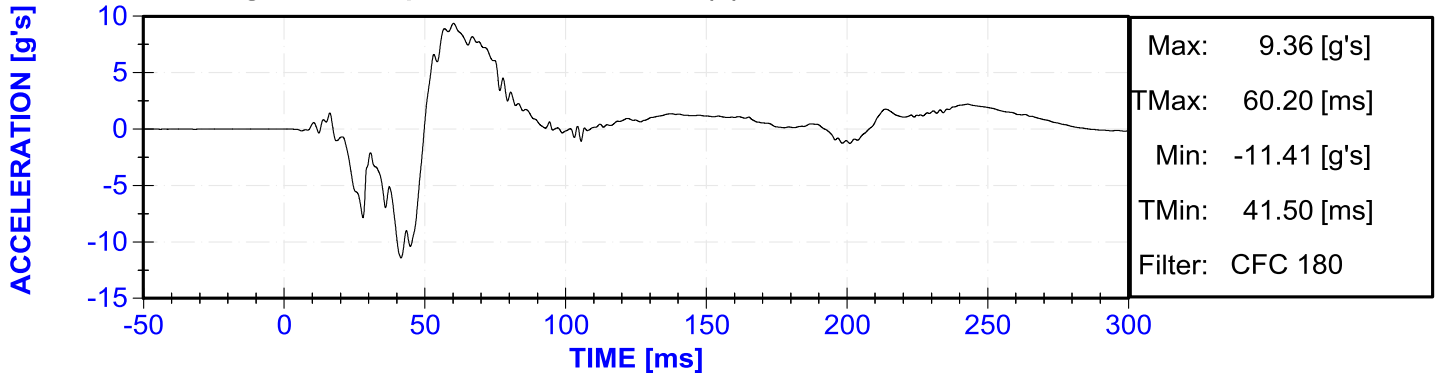

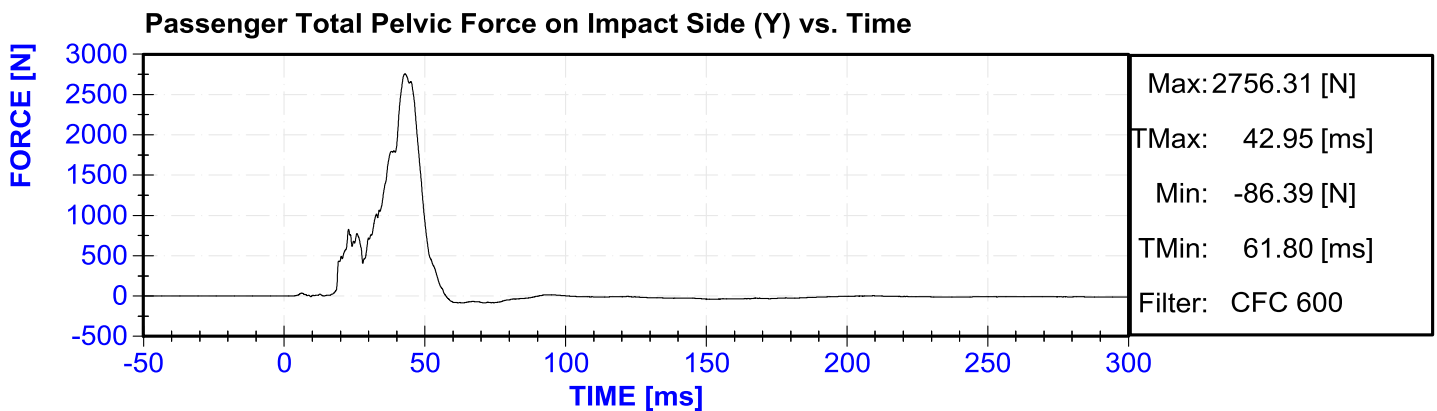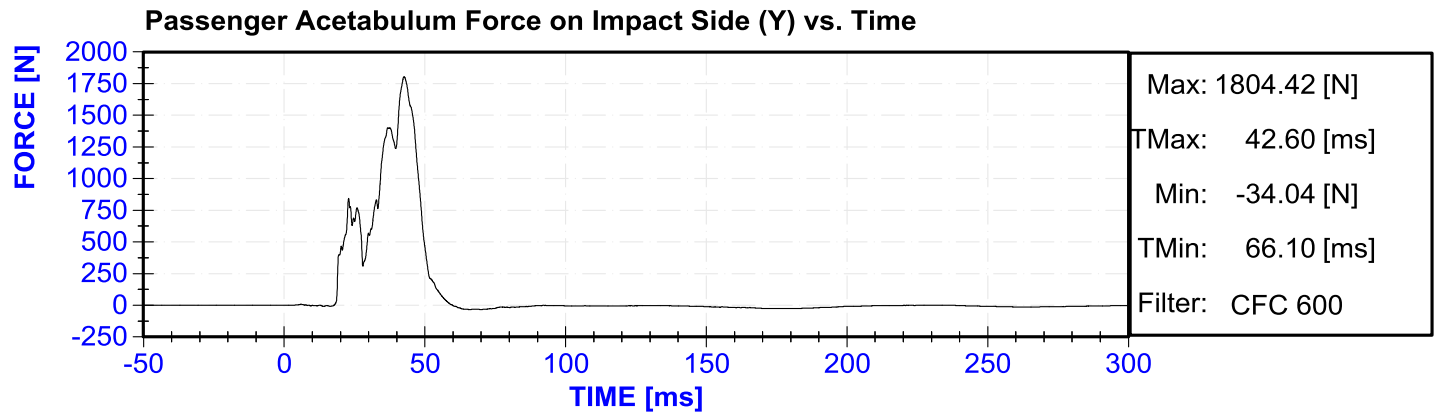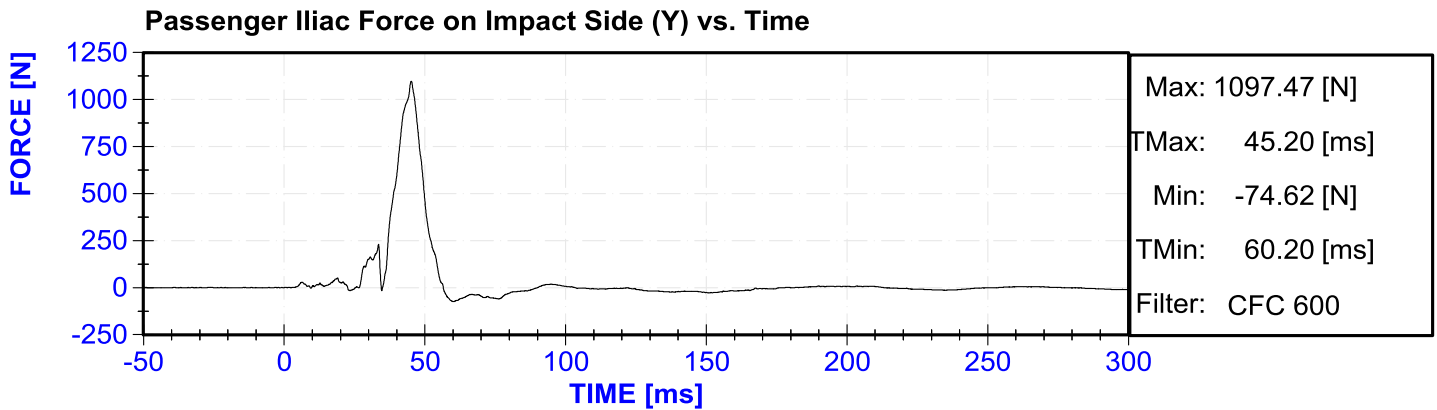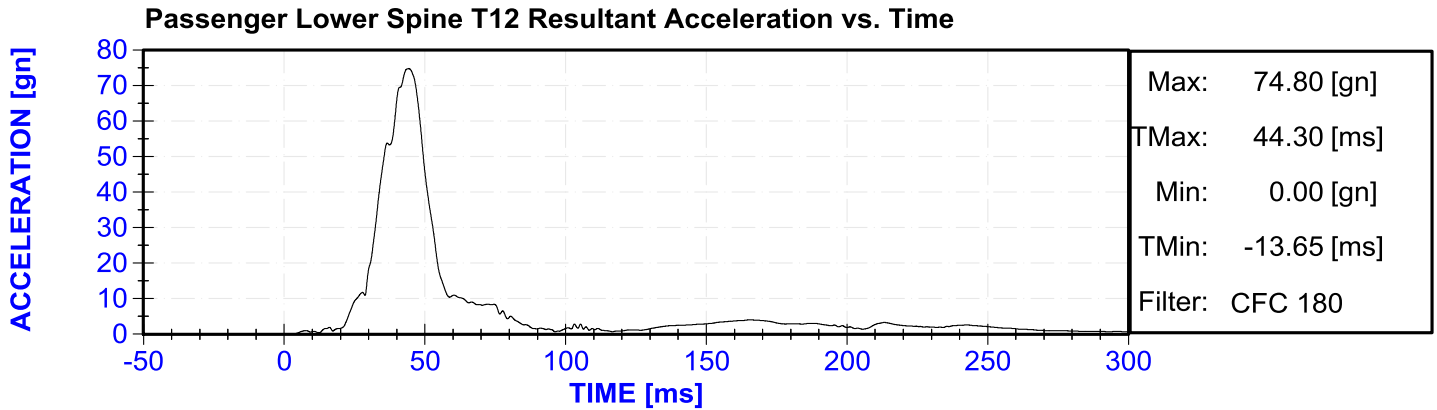

## APPENDIX C

### DUMMY PERFORMANCE CALIBRATION TEST DATA

**CALIBRATION TEST RESULTS**

**PRE-TEST**

**EUROSID 2 (ES-2RE) MALE – DRIVER ATD**

**SERIAL NO: F034**

**(CONFIGURED FOR LEFT SIDE IMPACT)**




External Measurements - EuroSID-2re


Technician: M.Hartung

Date: 10/14/2016

Dummy Serial Number: F034

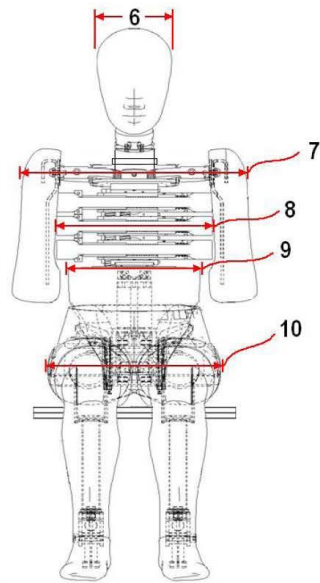

FRONT VIEW

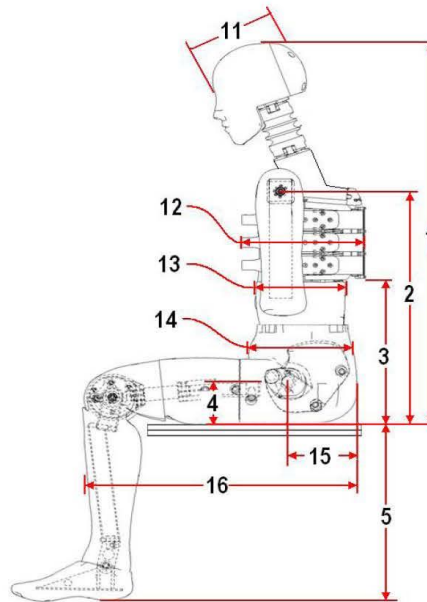

SIDE VIEW

Dim. No.	Description	Specification (mm)		Result (mm)	Pass/Fail
1	Sitting Height	900	918	910	Pass
2	Seat to Shoulder Joint	558	572	565	Pass
3	Seat to Lower Face of Thoracic Spine Box	346	356	350	Pass
4	Seat to Hip Joint (center of bolt)	97	103	102	Pass
5	Sole to Seat, Sitting	333	451	422	Pass
6	Head Width	152	158	153	Pass
7	Shoulder/Arm Width	461	479	471	Pass
8	Thorax Width	322	332	329	Pass
9	Abdomen Width	273	287	279	Pass
10	Pelvis Lap Width	359	373	367	Pass
11	Head Depth	196	206	202	Pass
12	Thorax Depth	262	272	268	Pass
13	Abdomen Depth	194	204	200	Pass
14	Pelvis Depth	235	245	239	Pass
15	Back of Buttocks to Hip Joint (center of bolt)	150	160	152	Pass
16	Back of Buttocks to Front Knee	597	615	606	Pass


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	31.3	Pass
Resultant Acceleration	125	155	g's	137.4	Pass
Oscillation	0	15	%	5.29	Pass
Fore-Aft Acceleration	-15	15	g's	10.0	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P58904	6/20/2016	12/19/2016
Y Accelerometer	ENDEVCO 7264CT	AC-P58911	6/20/2016	12/19/2016
Z Accelerometer	ENDEVCO 7264CT	AC-P58776	6/20/2016	12/19/2016

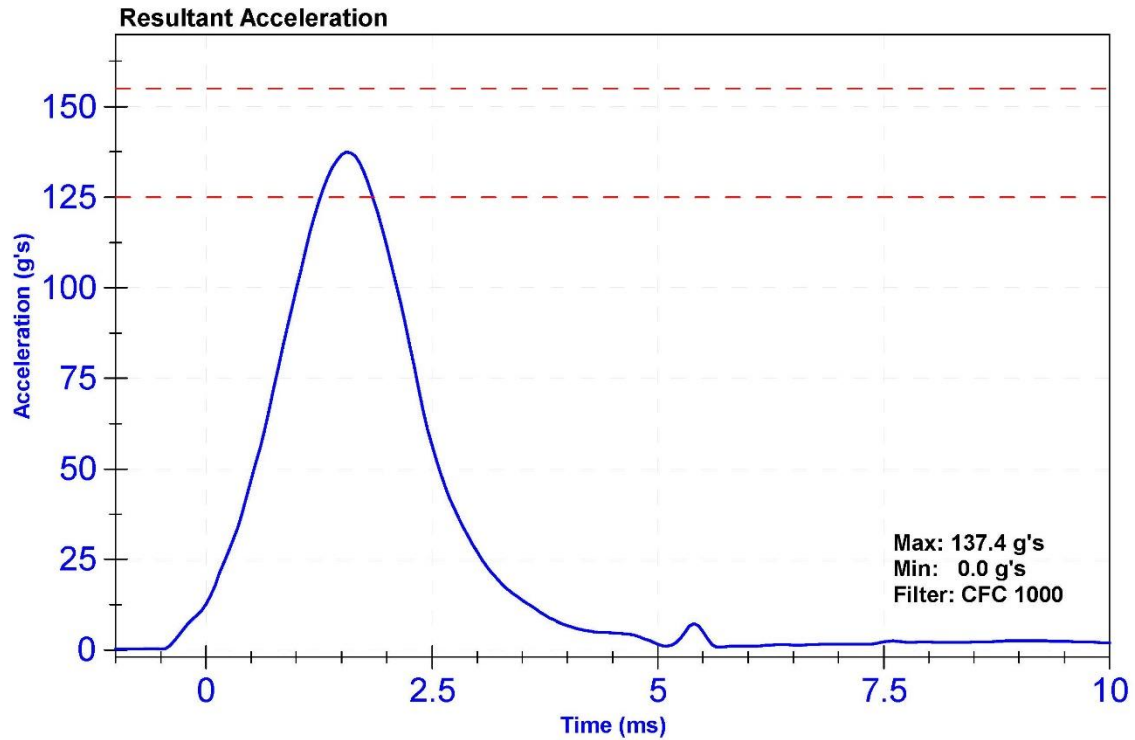

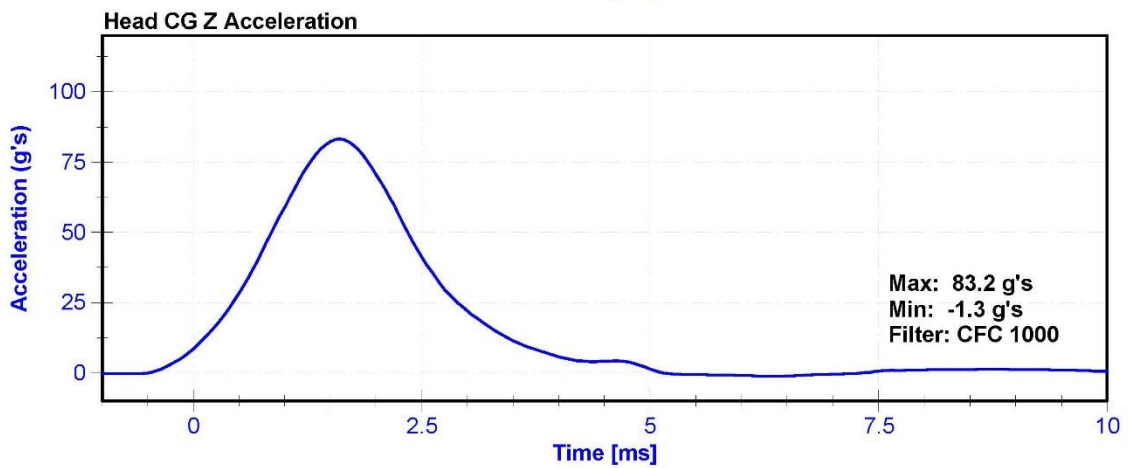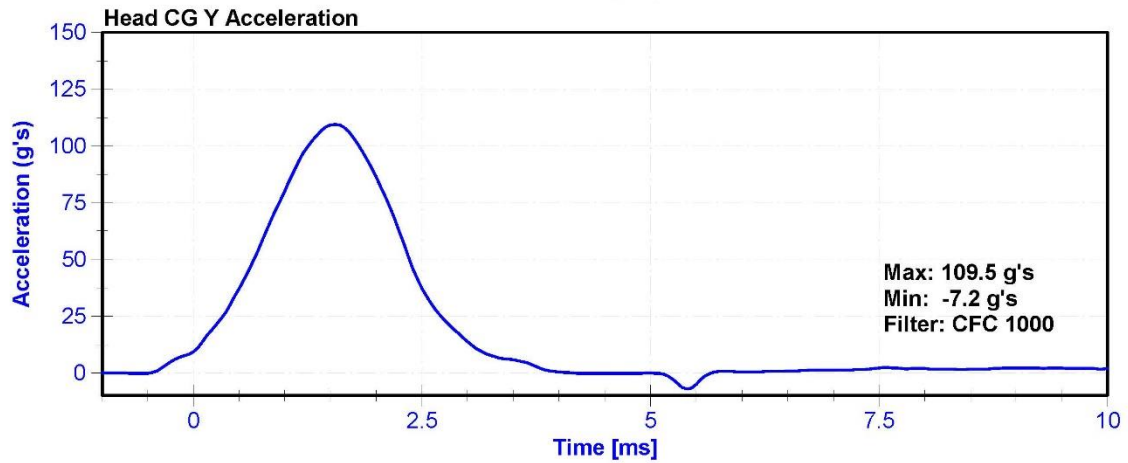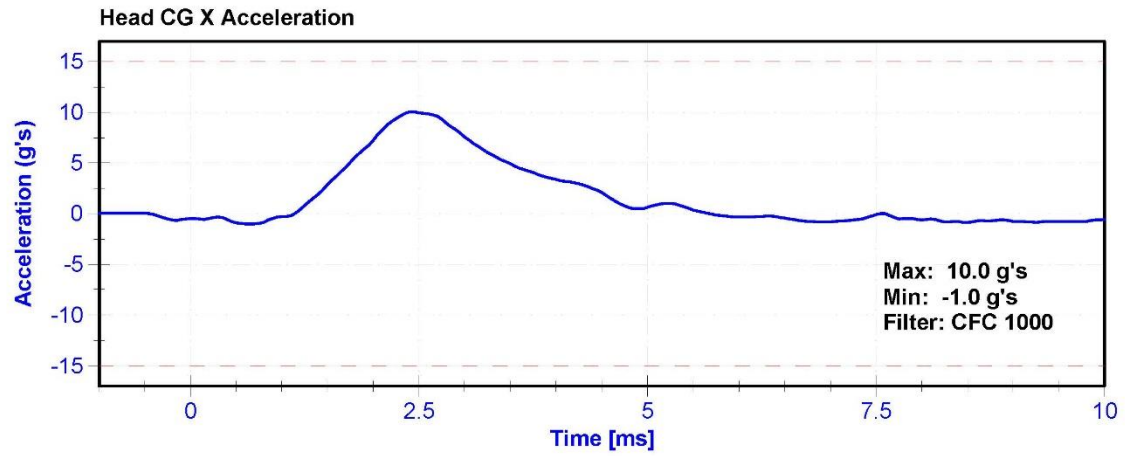


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21	Pass
Humidity	10	70	%	36.7	Pass
Velocity	3.3	3.5	m/s	3.43	Pass
Lateral Neck Rotation	49	59	deg	51.8	Pass
Time at Maximum Rotation	54	66	ms	58.6	Pass
Time of Rotation Decay from Maximum	53	88	ms	55.5	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5F3	5/10/2016	5/10/2017
Front Pendulum Potentiometer	SP22G	DS-094	10/11/2016	10/11/2017
Headform Potentiometer	SP22G	DS-095	10/11/2016	10/11/2017

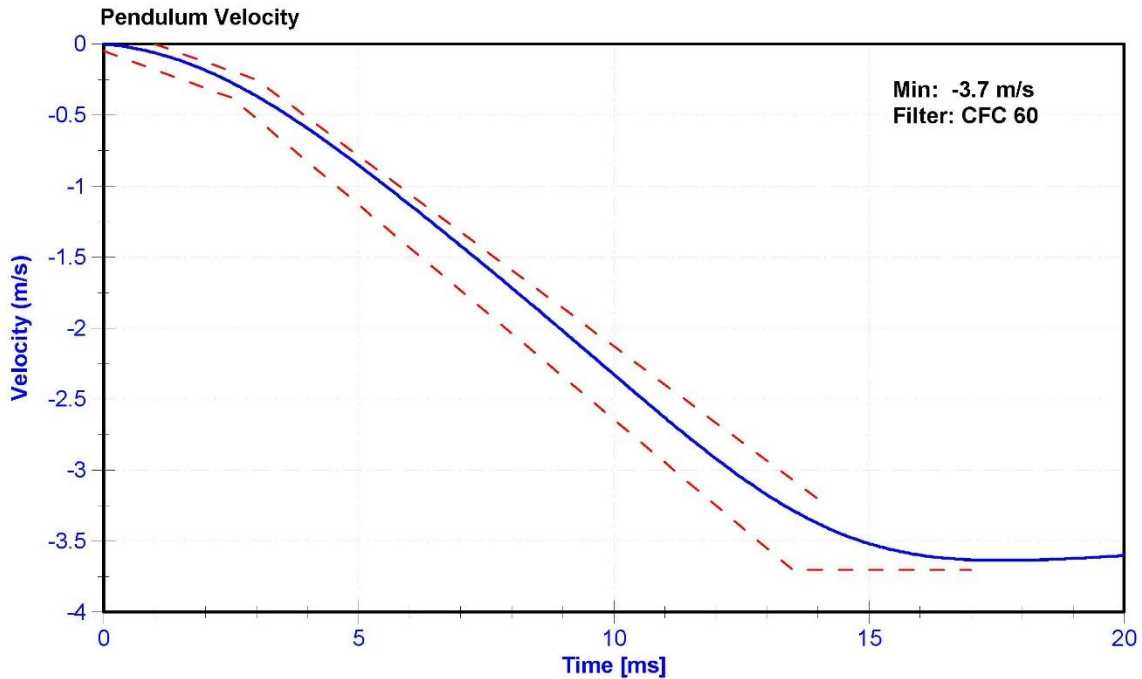

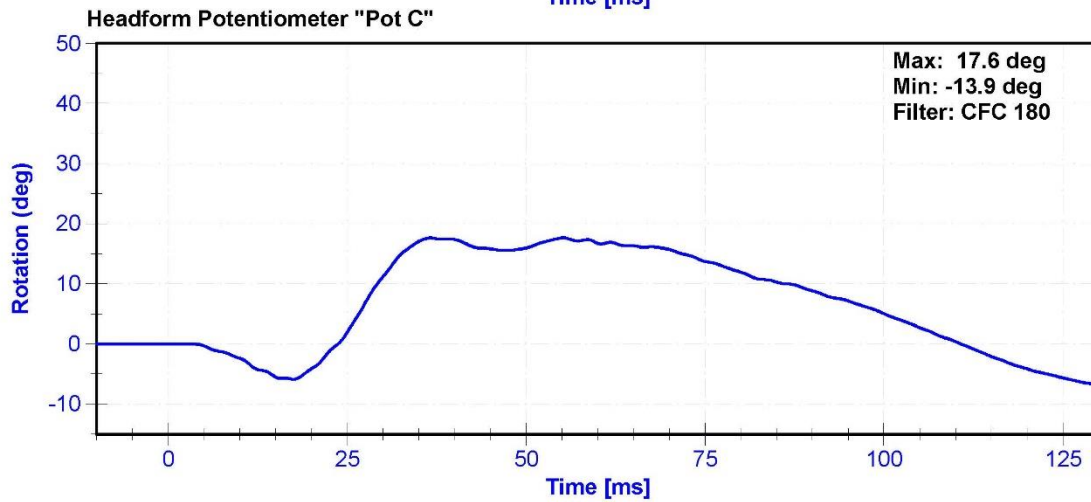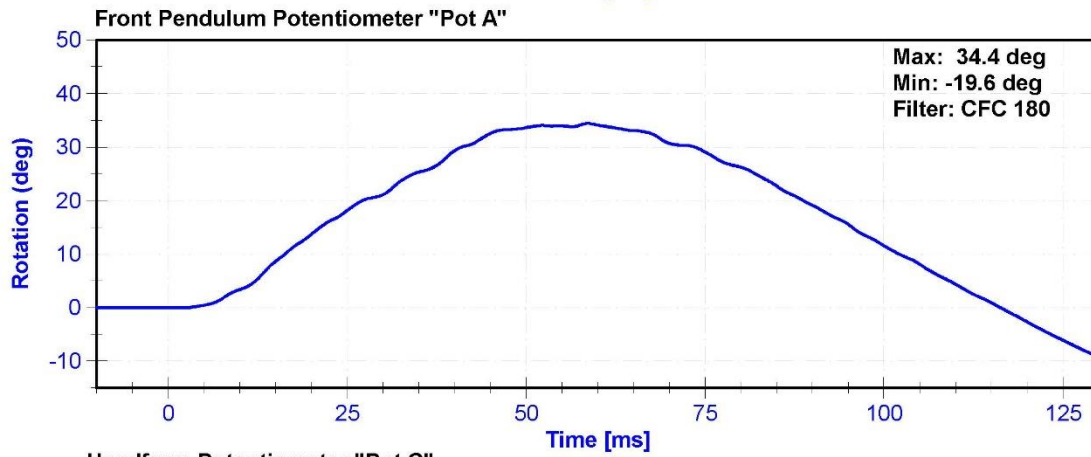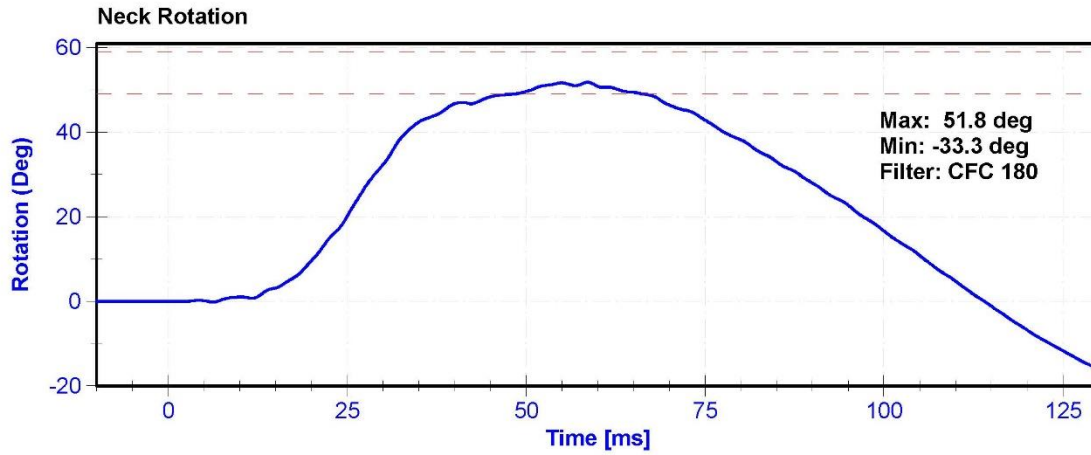


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.0	Pass
Humidity	10	70	%	44.0	Pass
Velocity	4.2	4.4	m/s	4.20	Pass
Probe Acceleration	7.5	10.5	g's	8.54	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	ENDEVCO 7264CT	AC-P16593	4/1/2016	4/1/2017

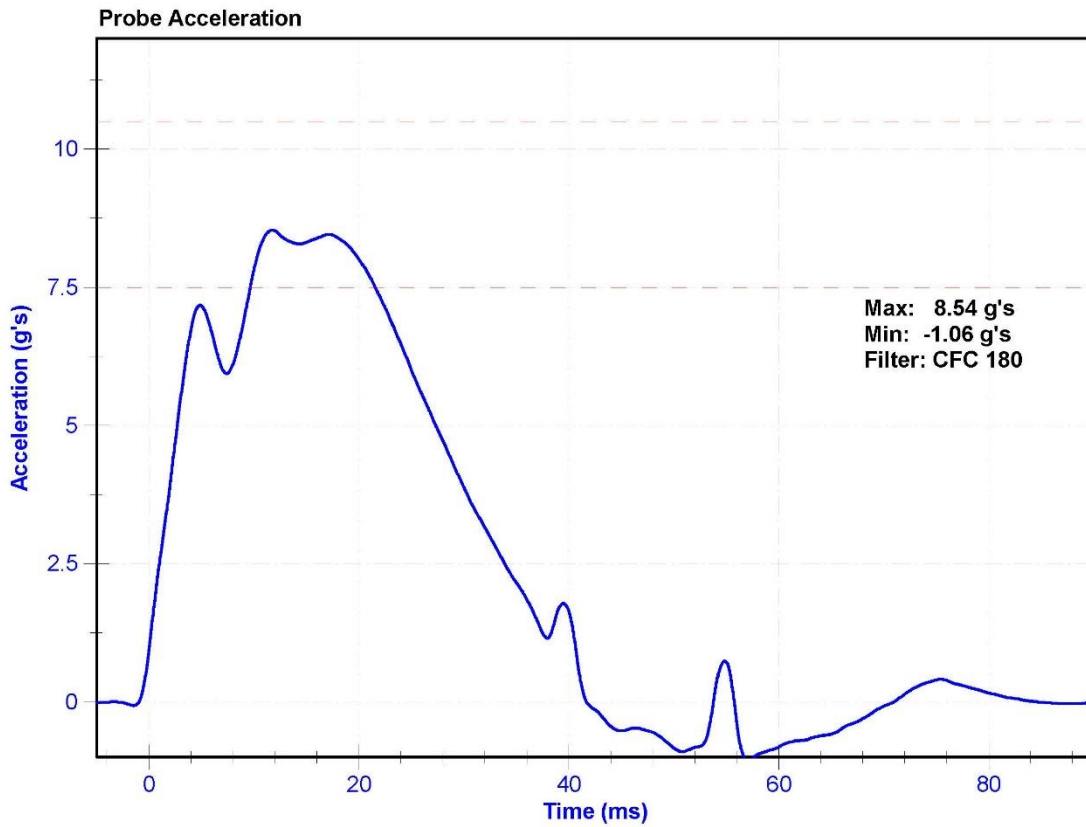


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	39.3	Pass
Rib Displacement	36	40	mm	36.1	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-183GFE	6/20/2016	6/20/2017

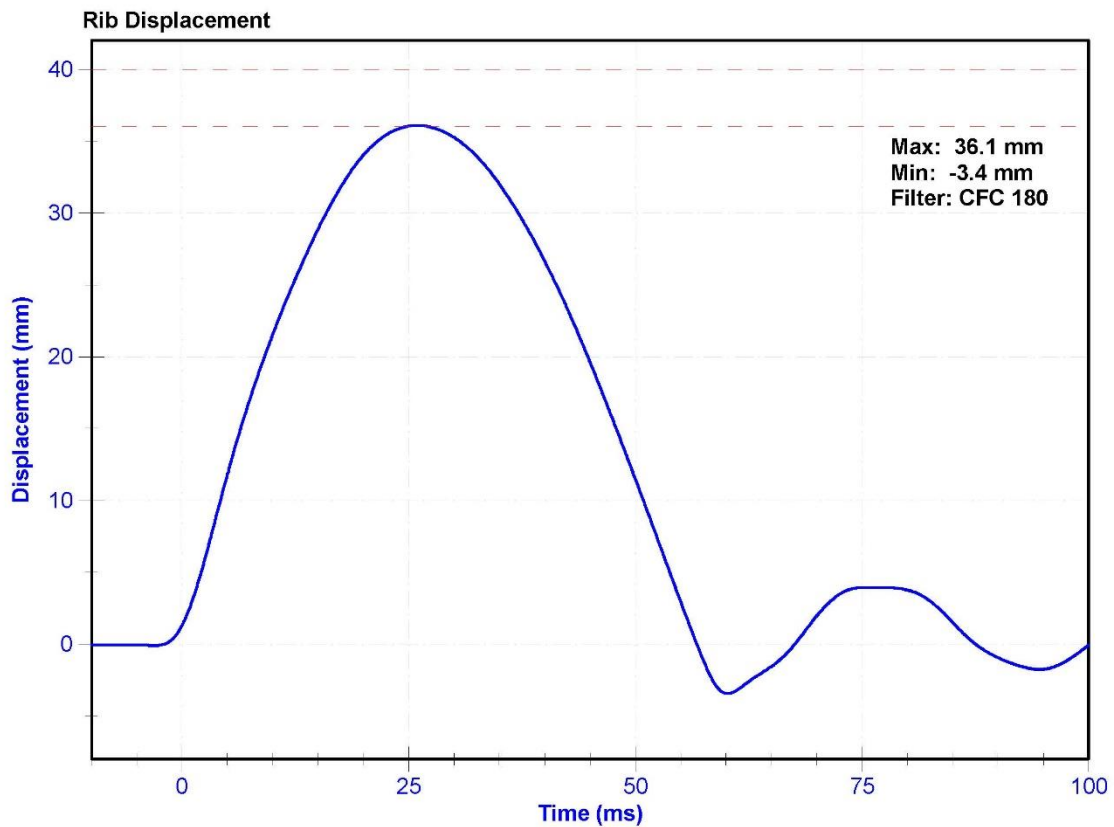


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	39.3	Pass
Rib Displacement	46	51	mm	47.0	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-183GFE	6/20/2016	6/20/2017

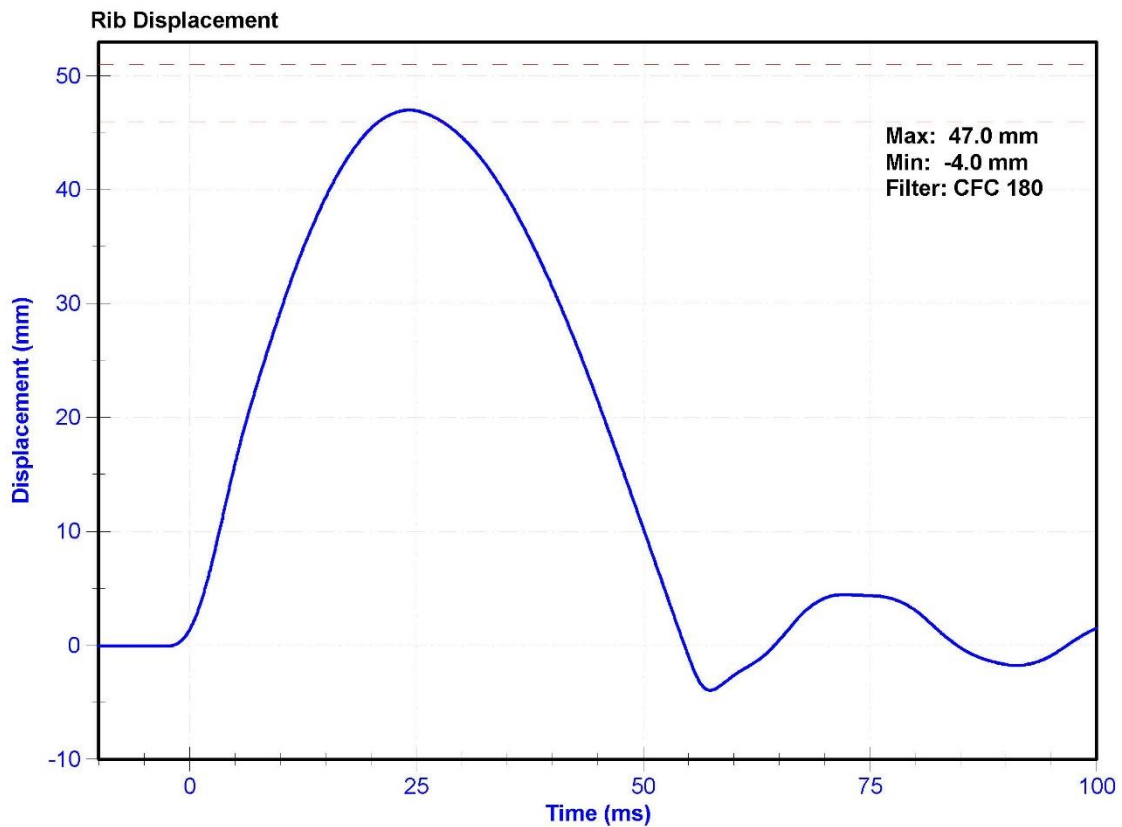


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	39.3	Pass
Rib Displacement	36	40	mm	37.1	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-184GFE	6/20/2016	6/20/2017

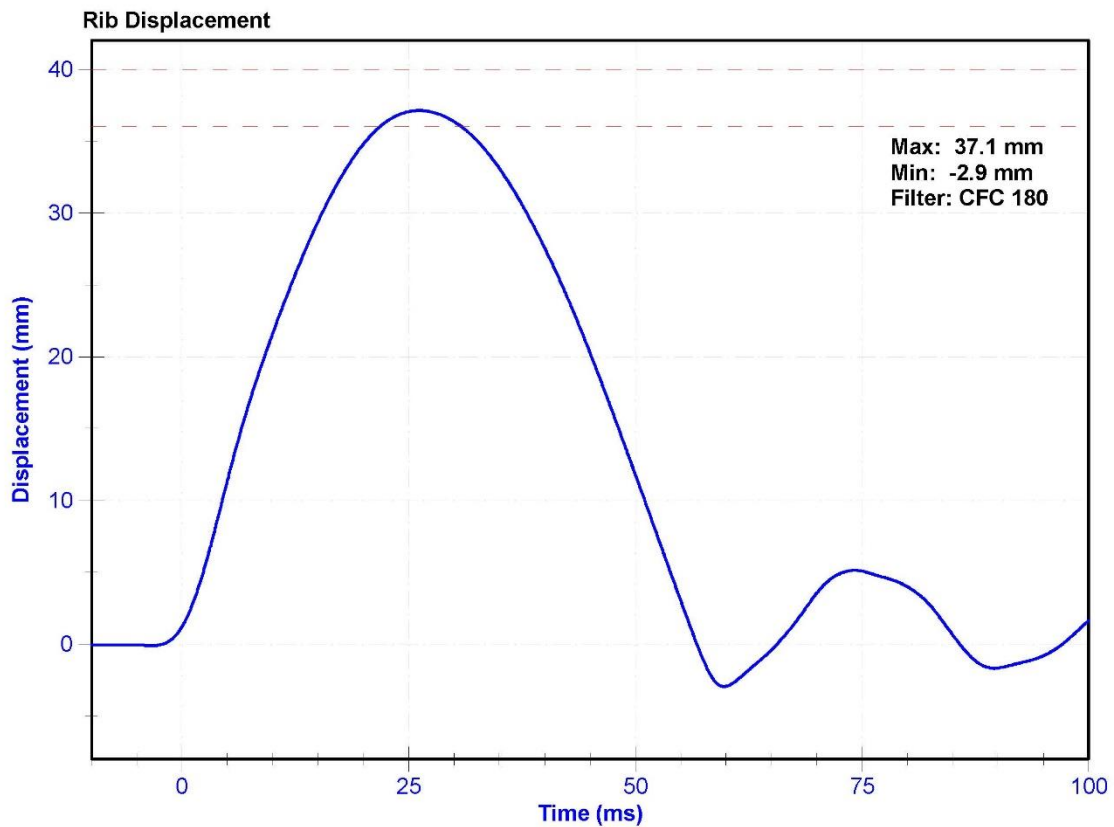


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	39.3	Pass
Rib Displacement	46	51	mm	47.9	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-184GFE	6/20/2016	6/20/2017

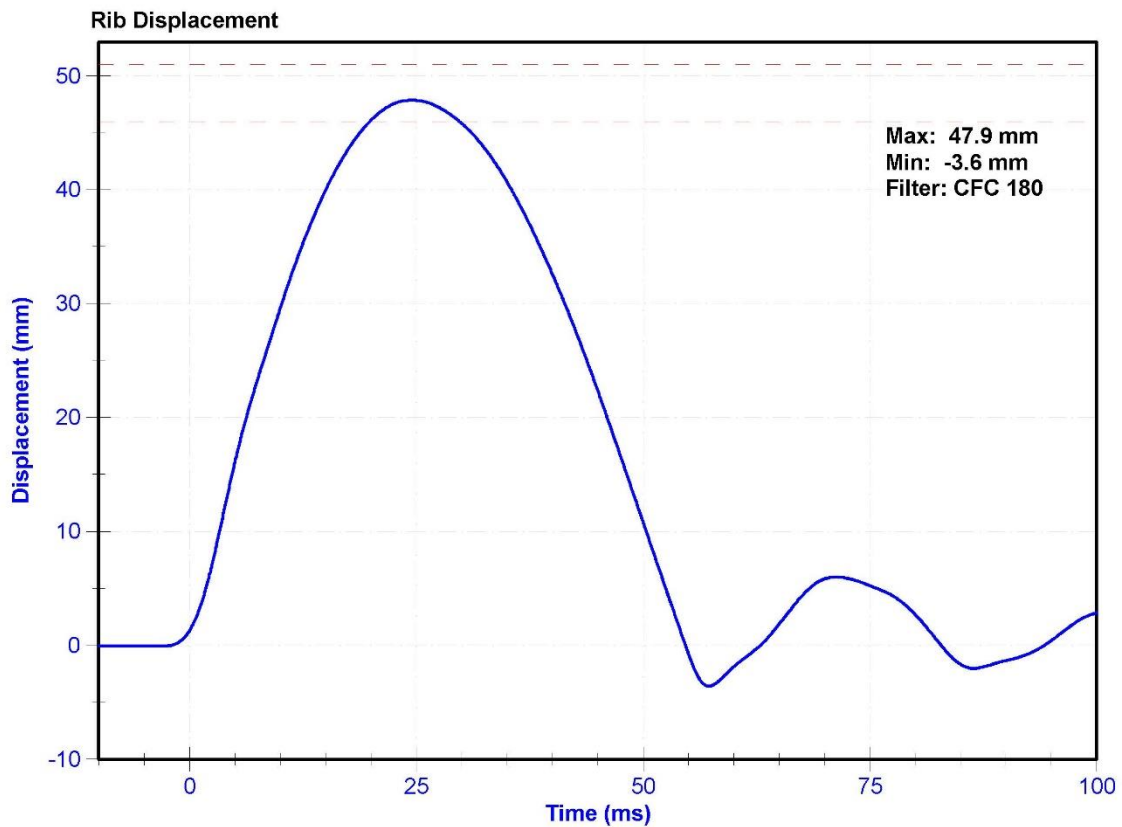


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	39.3	Pass
Rib Displacement	36	40	mm	37.3	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-182GFE	6/20/2016	6/20/2017

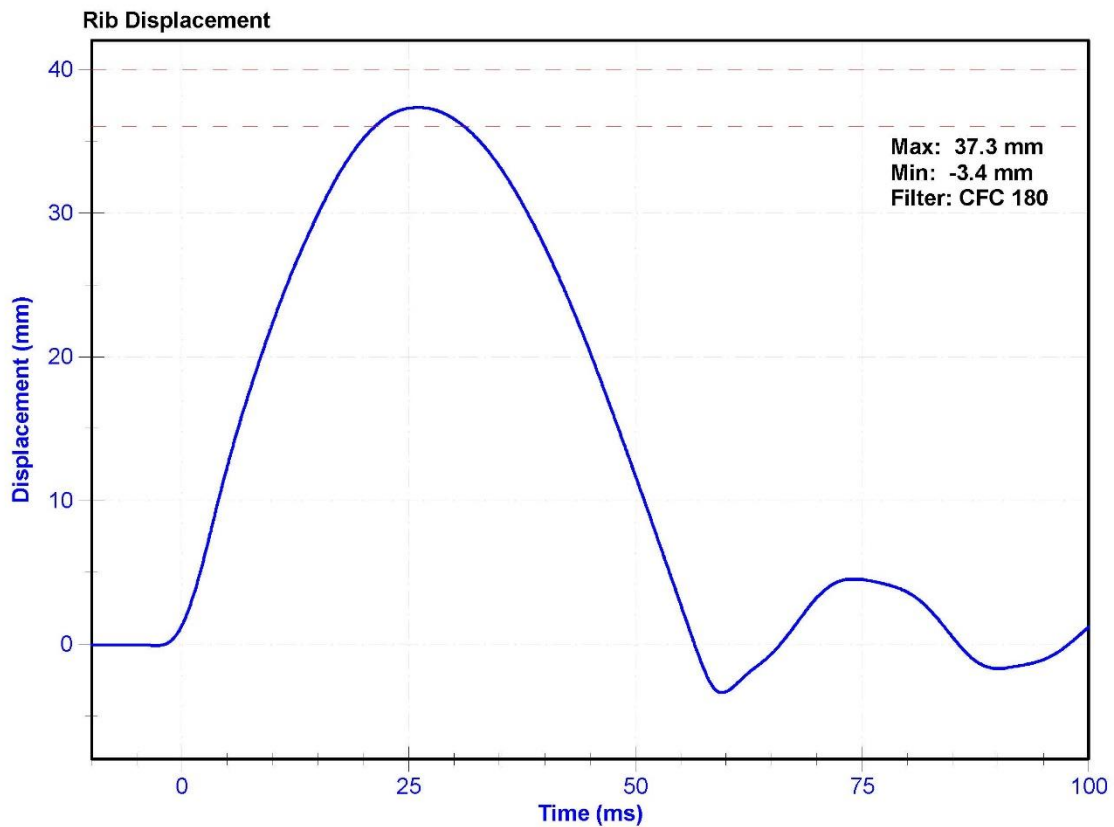


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	39.3	Pass
Rib Displacement	46	51	mm	48.4	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-182GFE	6/20/2016	6/20/2017

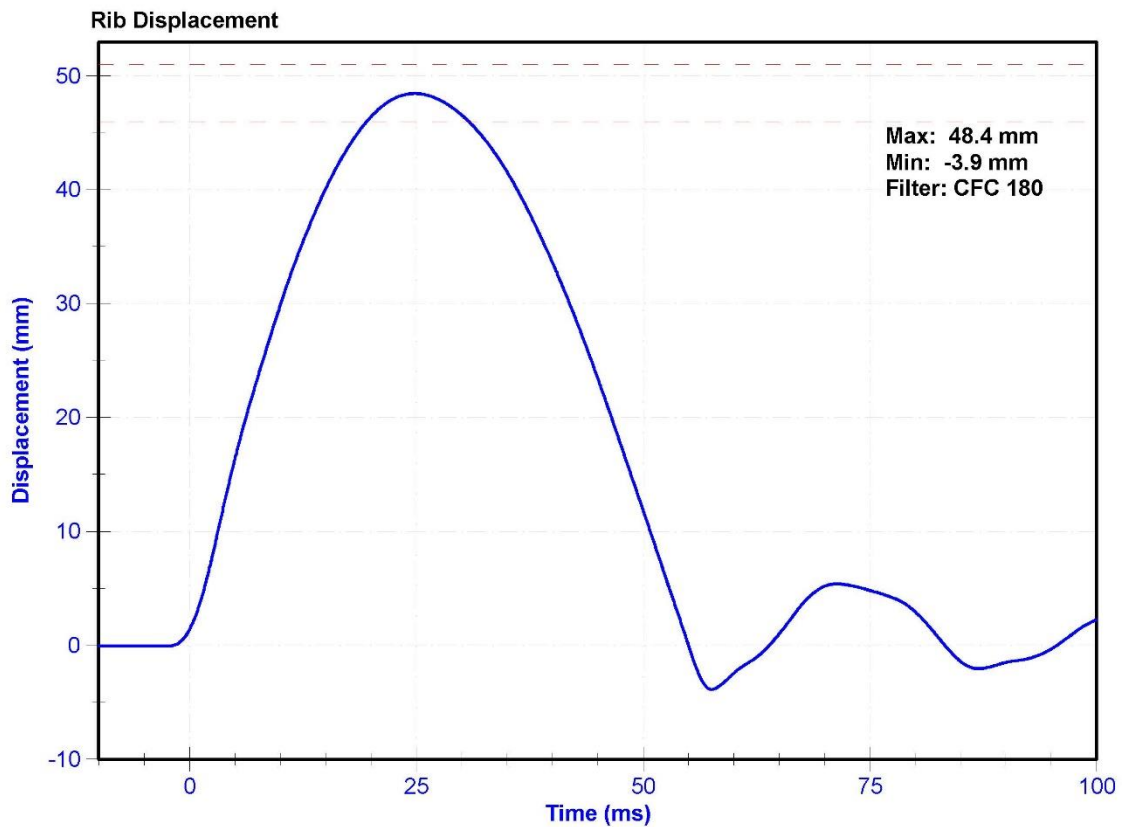


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle





**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.0	Pass
Humidity	10	70	%	39.5	Pass
Velocity	5.4	5.6	m/s	5.49	Pass
Resistive Force after 6ms	5100	6200	N	5843.0	Pass
Upper Thorax Rib Deflection	34	41	mm	37.5	Pass
Mid Thorax Rib Deflection	37	45	mm	41.3	Pass
Lower Thorax Rib Deflection	37	44	mm	40.7	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	ENDEVCO 7264CT	AC-P16593	4/1/2016	4/1/2017
Upper Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-183GFE	6/20/2016	6/20/2017
Middle Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-184GFE	6/20/2016	6/20/2017
Lower Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-182GFE	6/20/2016	6/20/2017

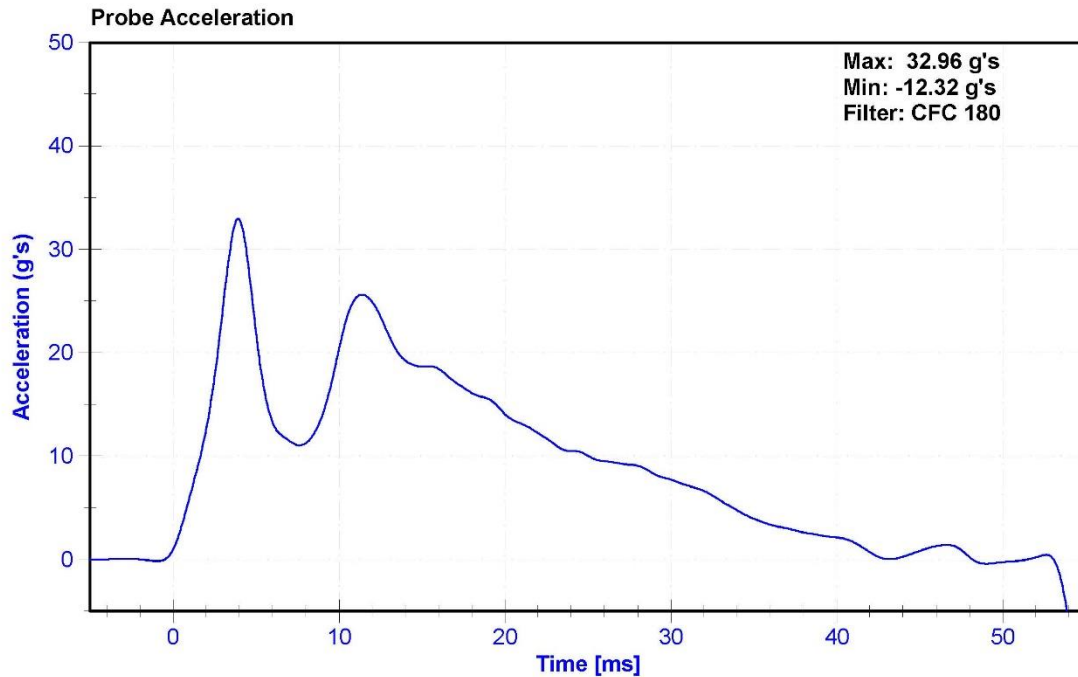

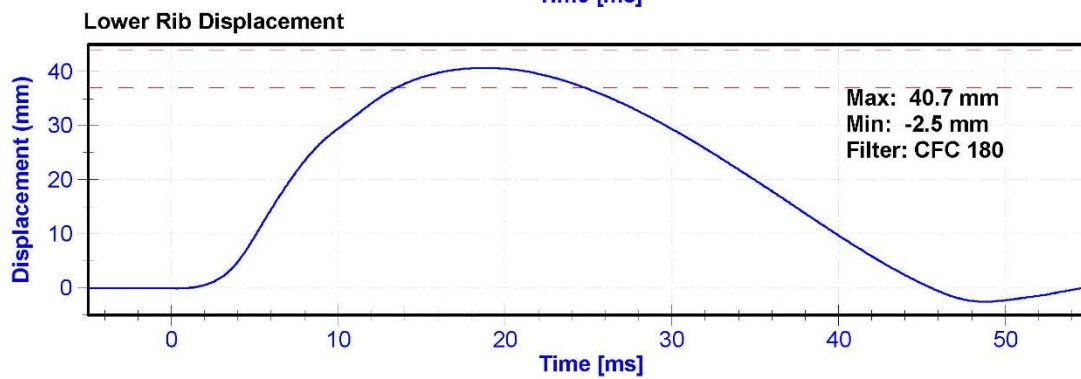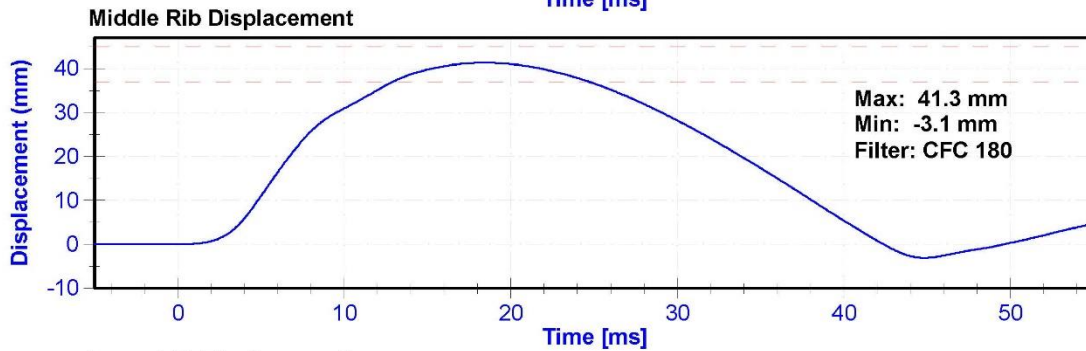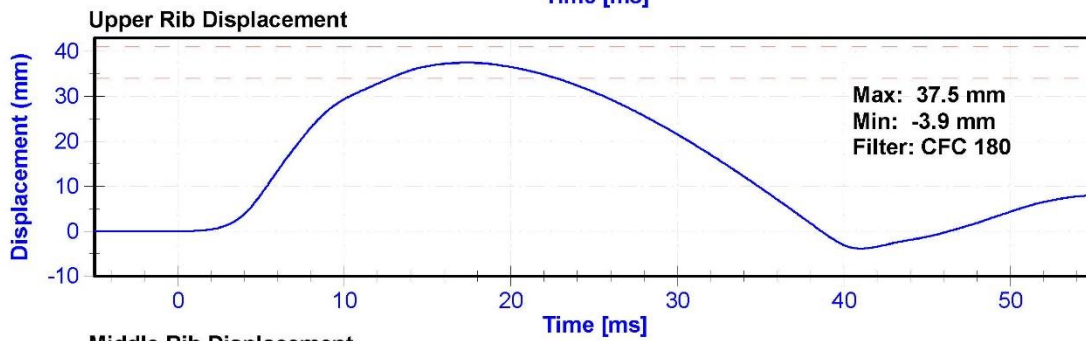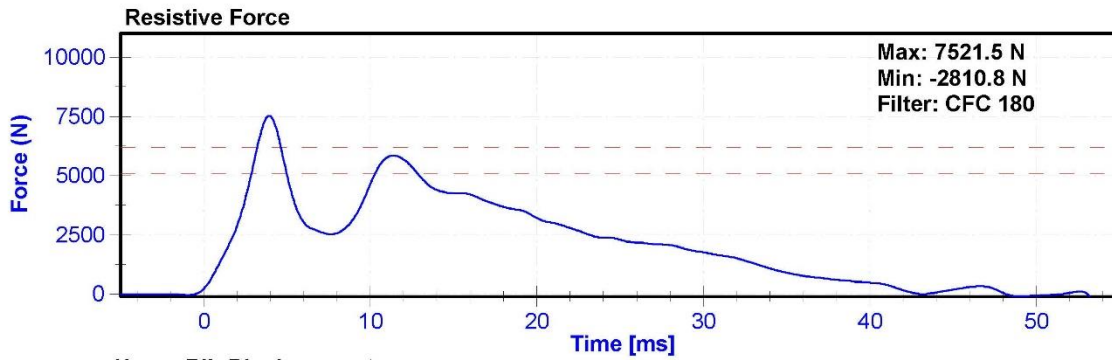


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle





**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.6	Pass
Humidity	10	70	%	40.1	Pass
Velocity	3.9	4.1	m/s	4.02	Pass
Combined Abdomen Force	2200	2700	N	2514.1	Pass
Time at Peak Abdomen Force	10.0	12.3	ms	10.80	Pass
Resistive Probe Force	4000	4800	N	4557.9	Pass
Time at Peak Resistive Force	10.6	13.0	ms	11.50	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P16593	4/1/2016	4/1/2017
Front Abdomen Load Cell	DENTON 2631	LC-1512	5/24/2016	5/24/2017
Middle Abdomen Load Cell	DENTON 2631	LC-1526	5/24/2016	5/24/2017
Rear Abdomen Load Cell	DENTON 2631	LC-1516	5/24/2016	5/24/2017

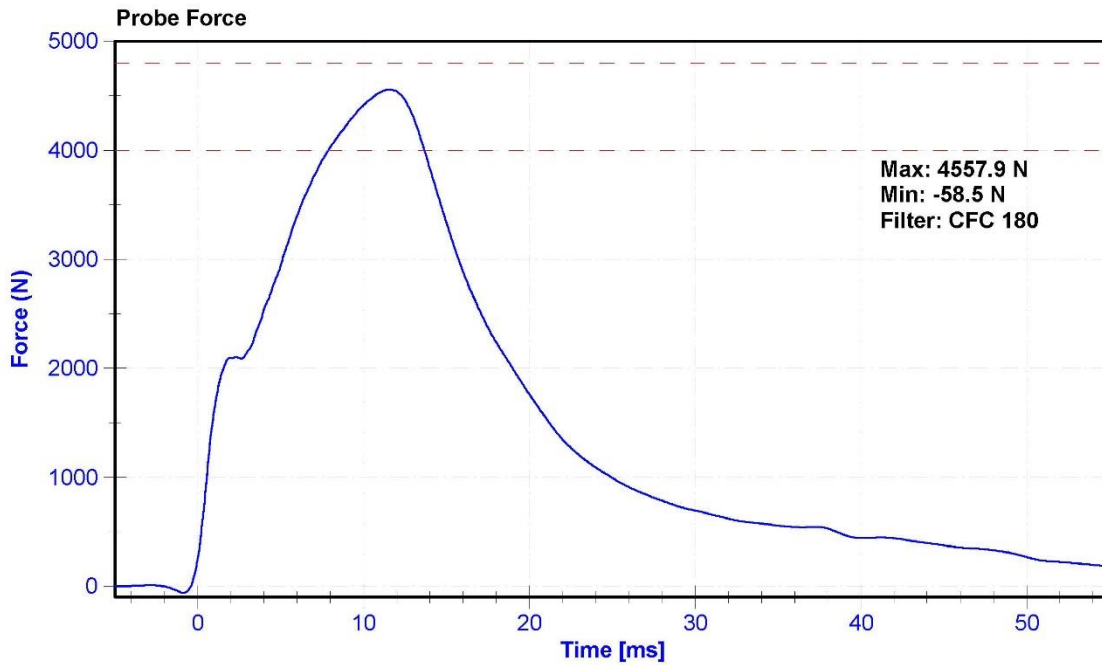

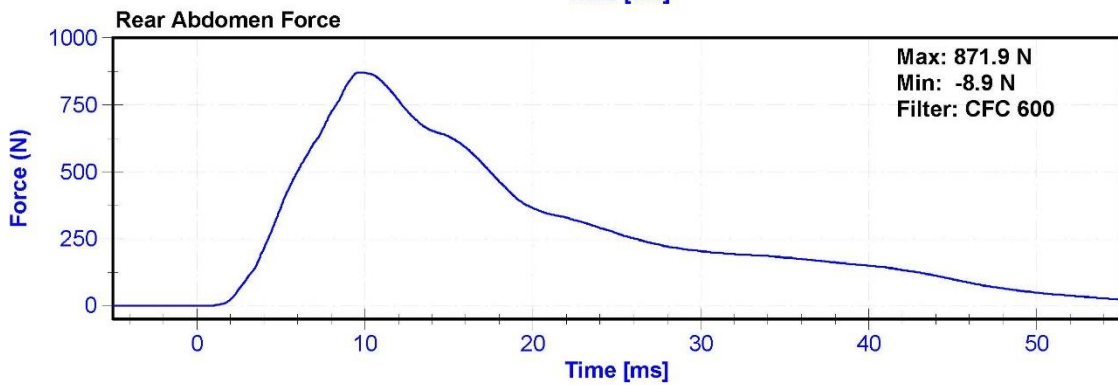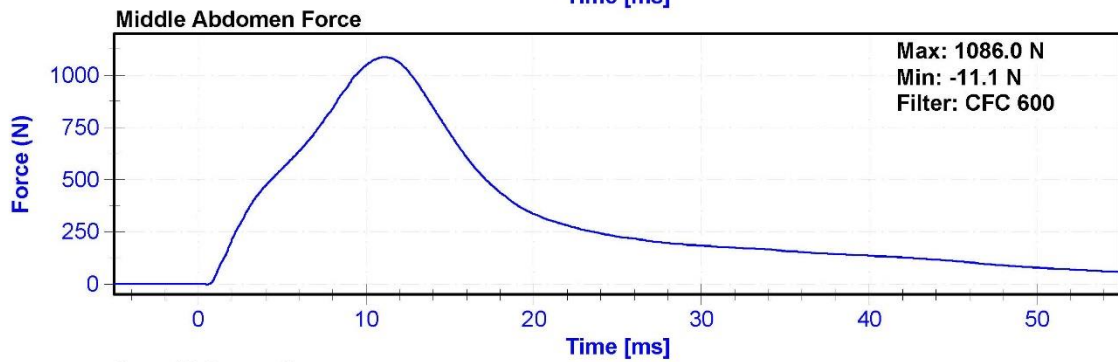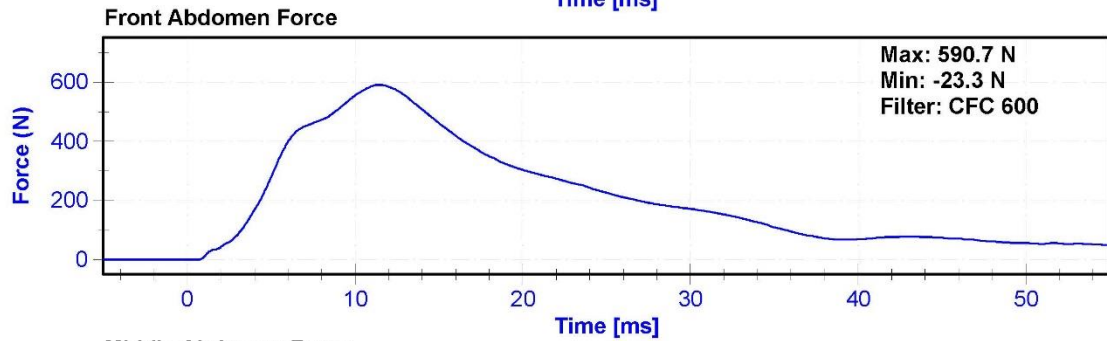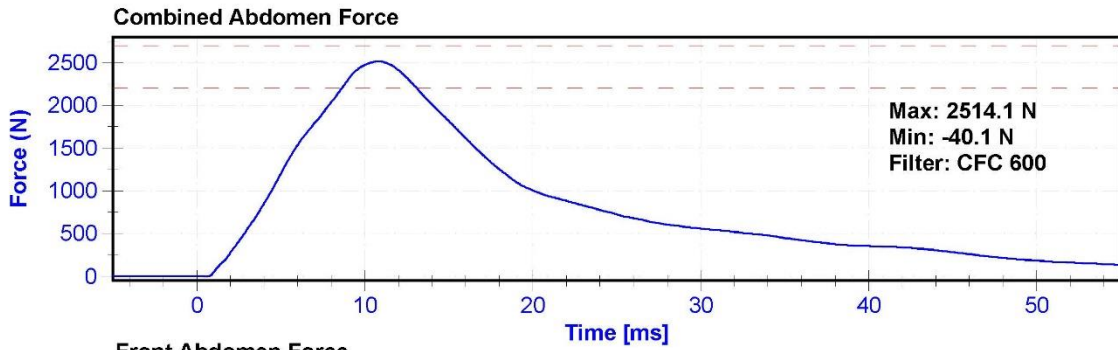



ATD Manufacturer	FTSS	Test Technician	M.Goehle
ATD Serial Number	F034	Laboratory Supervisor	M.Hartung



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	35.6	Pass
Velocity	5.95	6.15	m/s	6.113	Pass
Lateral Spine Rotation	45	55	deg	46.9	Pass
Time at Maximum Rotation	39	53	ms	43.7	Pass
Time of Decay to Zero Degrees	37	57	ms	37.1	Pass
Pulse within Corridor?	-	-	-		

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5F3	5/10/2016	5/10/2017
Pendulum "A" Potentiometer	SP22G	DS-094	10/11/2016	10/11/2017
Condyle "B" Potentiometer	SP22G	DS-095	10/11/2016	10/11/2017

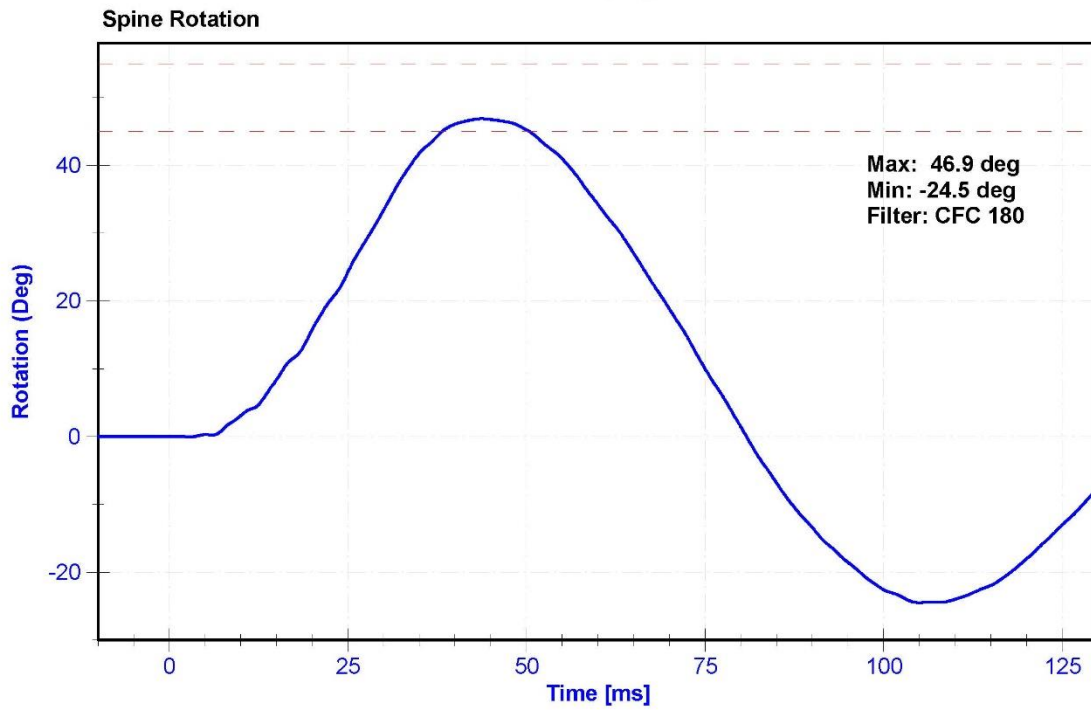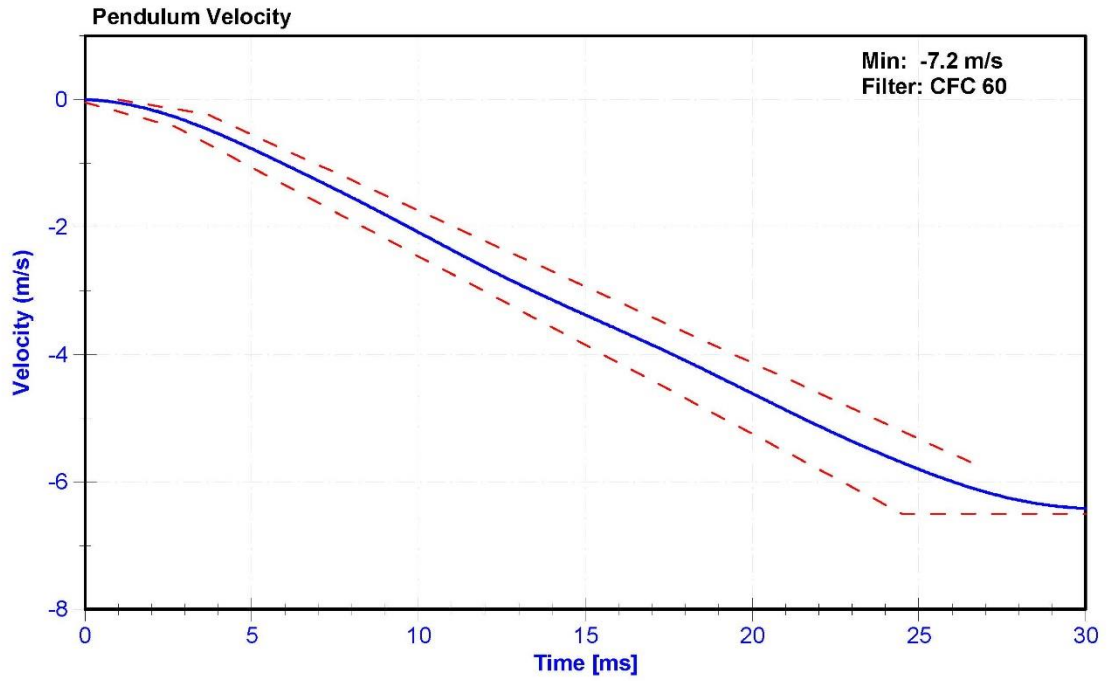

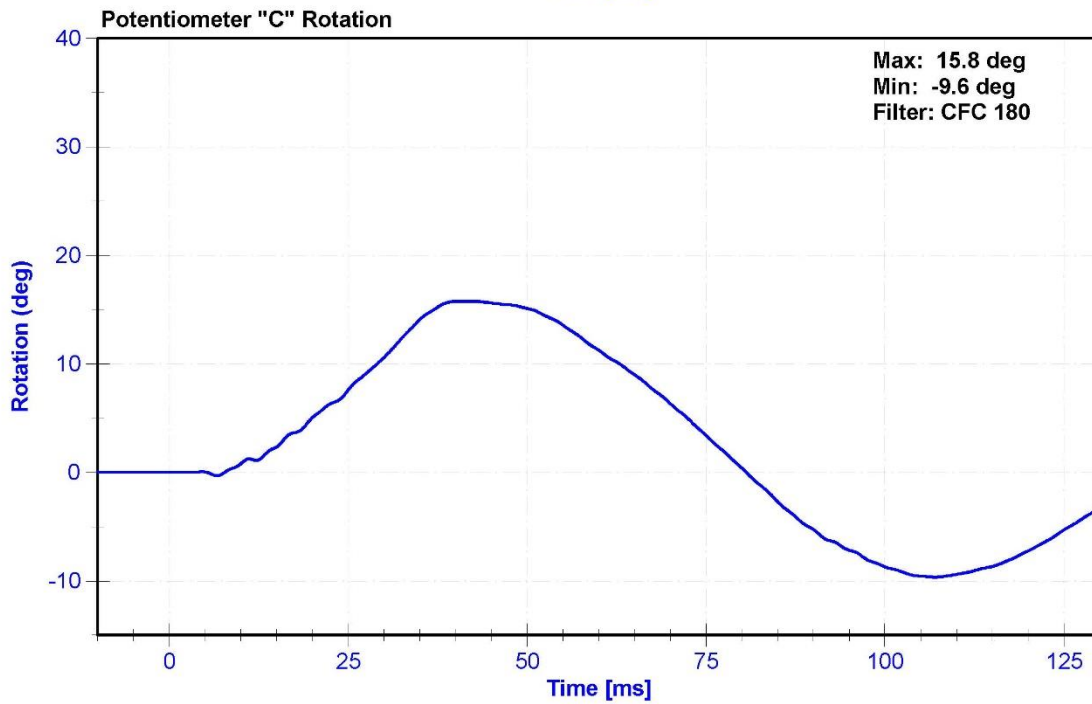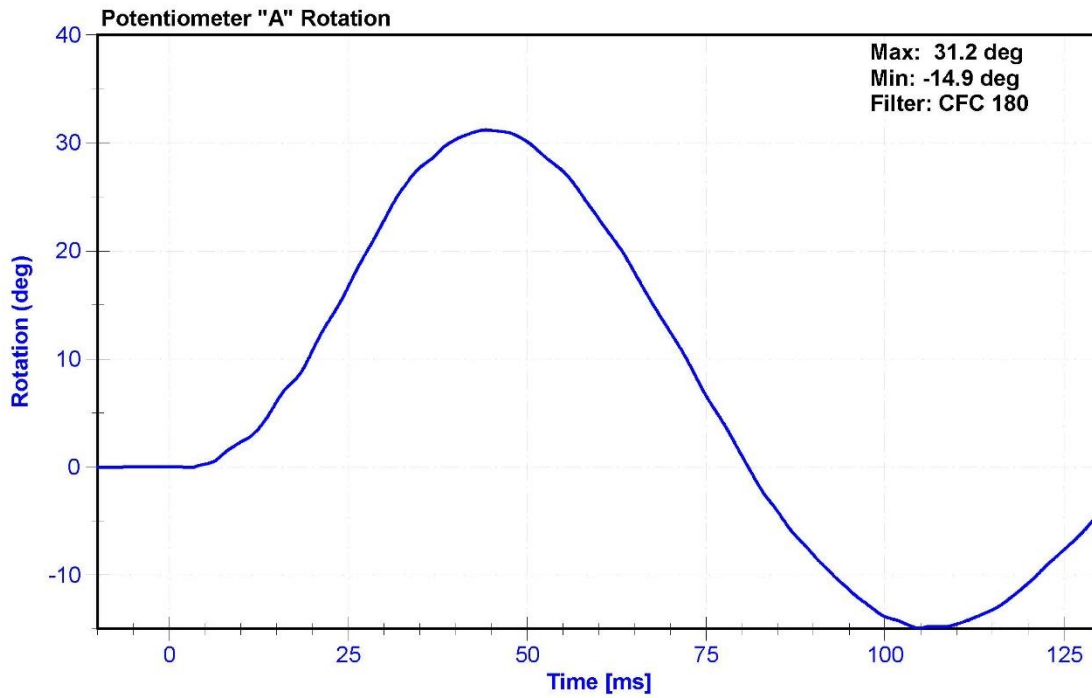


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.0	Pass
Humidity	10	70	%	41.0	Pass
Velocity	4.2	4.4	m/s	4.31	Pass
Resistive Force	4700	5400	N	4924.5	Pass
Time at Peak Resistive Force	11.8	16.1	ms	13.25	Pass
Pubic Force	-1590	-1230	N	-1333.2	Pass
Time at Peak Pubic Force	12.2	17.0	ms	14.35	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P16593	4/1/2016	4/1/2017
Pubic Load Cell	Denton 3096JFL	LC-465Fy	5/24/2016	5/24/2017

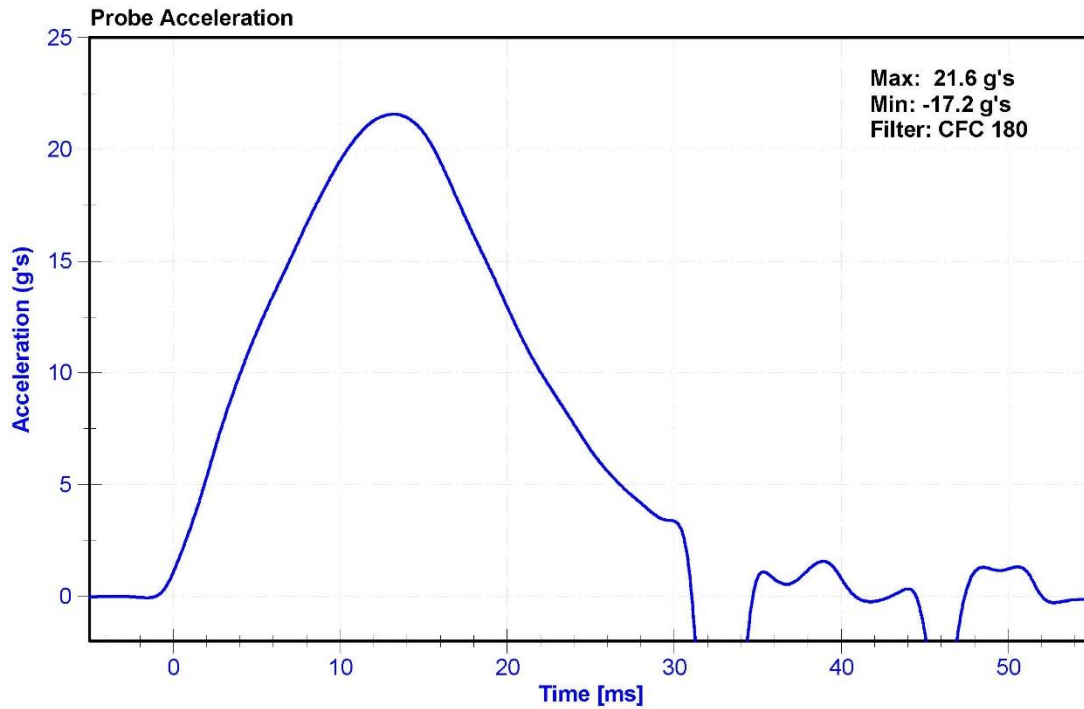

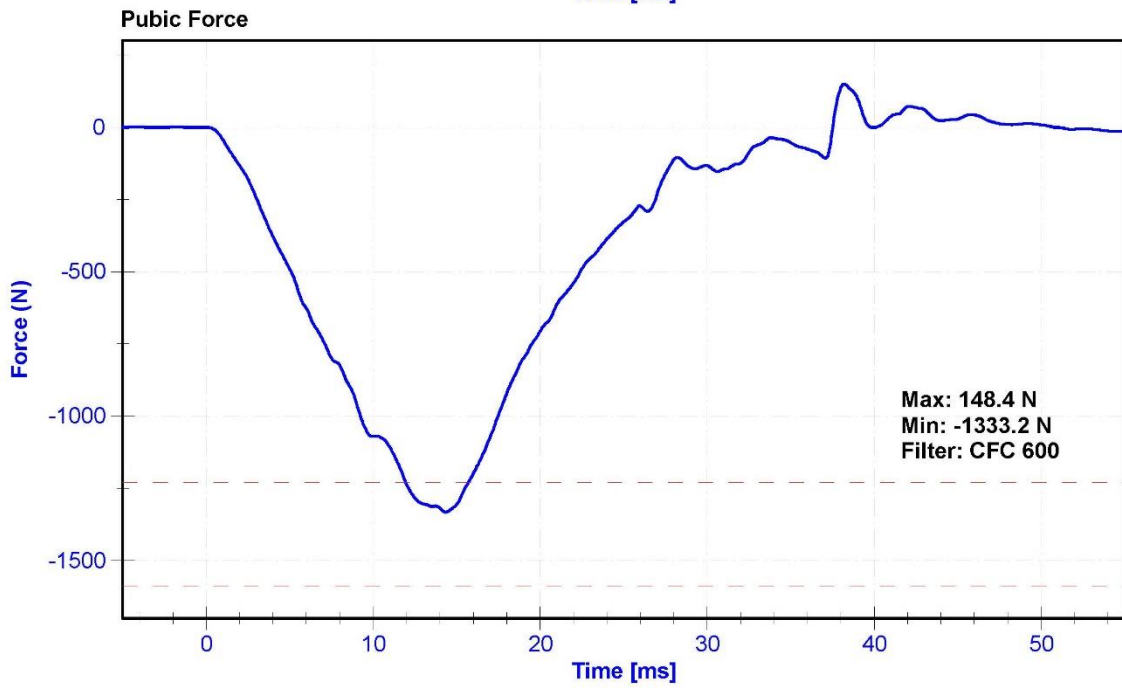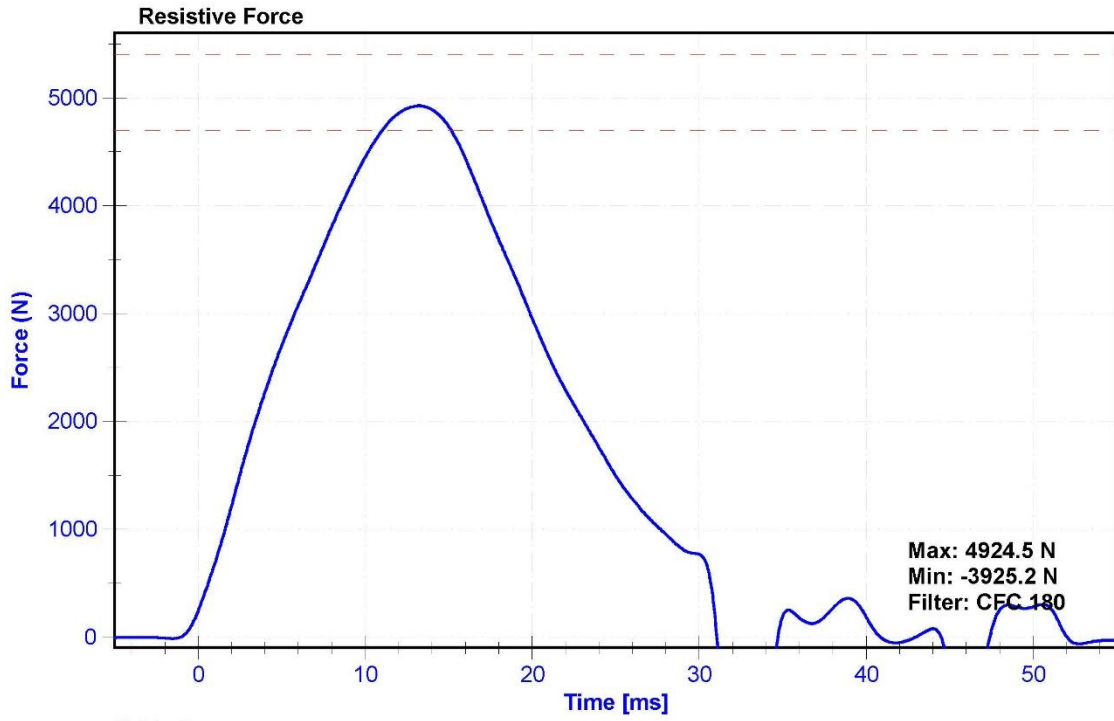

**CALIBRATION TEST RESULTS**

**PRE-TEST**

**SID-IIS 5<sup>TH</sup> PERCENTILE FEMALE - PASSENGER ATD**

**SERIAL No: DG8012**

**(CONFIGURED FOR LEFT SIDE IMPACT)**




External Measurements - SID-IIs

Technician: M. Geesey

Date: 10/13/2016

Dummy Serial Number: DG8012

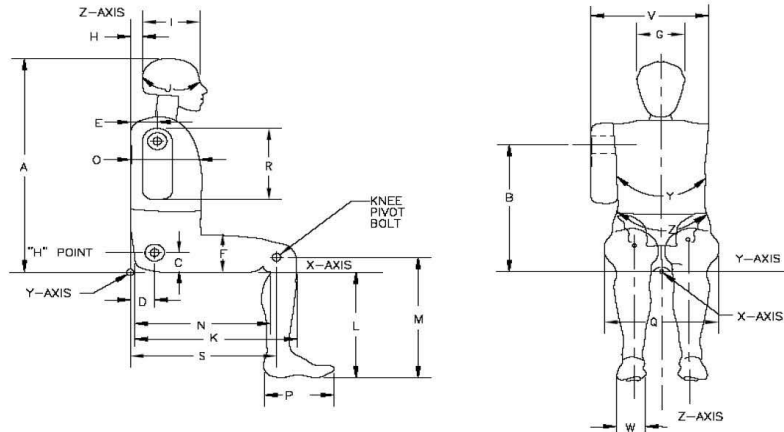

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	772	788	780	Pass
B	Shoulder Pivot Height	437	453	445	Pass
C	H-point Height	79	89	86	Pass
D	H-point from seatback	141	151	147	Pass
E	Shoulder Pivot from Backline	97	107	102	Pass
F	Thigh Clearance	119	135	128	Pass
G	Head Breadth	140	148	144	Pass
H	Head Back from Backline	40	46	43	Pass
I	Head Depth	178	188	183	Pass
J	Head Circumference	541	551	546	Pass
K	Buttock to Knee Length	514	540	531	Pass
L	Popliteal Height	343	369	351	Pass
M	Knee Pivot to floor height	392	409	400	Pass
N	Buttock Popliteal Length	416	442	429	Pass
O	Chest Depth w/o jacket	195	211	203	Pass
P	Foot Length	216	232	220	Pass
Q	Hip Breadth (w/pelvic plugs)	313	323	318	Pass
R	Arm Length	249	259	254	Pass
S	Knee Joint to seatback	477	493	485	Pass
V	Shoulder Width	341	357	349	Pass
W	Foot Width	78	94	86	Pass
Y	Chest Circumference w/jacket	851	881	862	Pass
Z	Waist Circumference	761	791	772	Pass


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	DG8012	Laboratory Supervisor	M. Goehle




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.3	Pass
Humidity	10	70	%	41.9	Pass
Resultant Acceleration	115	137	g's	118.1	Pass
Oscillation	0	15	%	6.6	Pass
Fore-Aft Acceleration	-15	15	g's	-2.6	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P51685	9/30/2016	3/31/2017
Y Accelerometer	ENDEVCO 7264CT	AC-P51682	9/30/2016	3/31/2017
Z Accelerometer	ENDEVCO 7264CT	AC-P51699	9/30/2016	3/31/2017

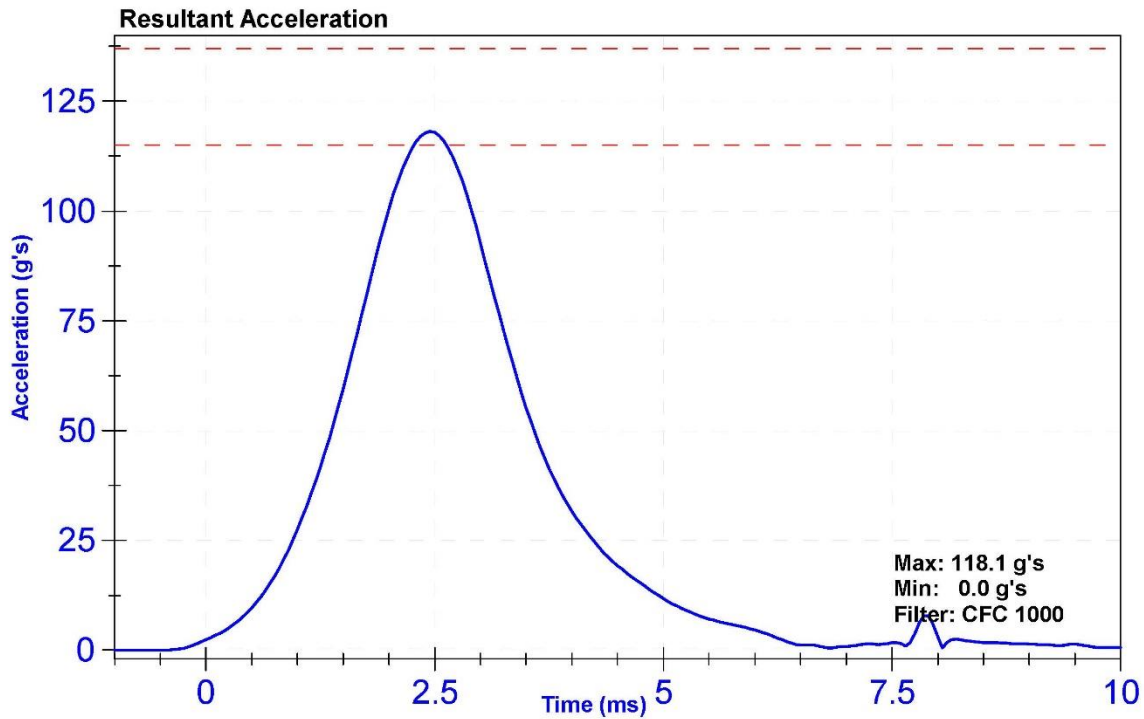

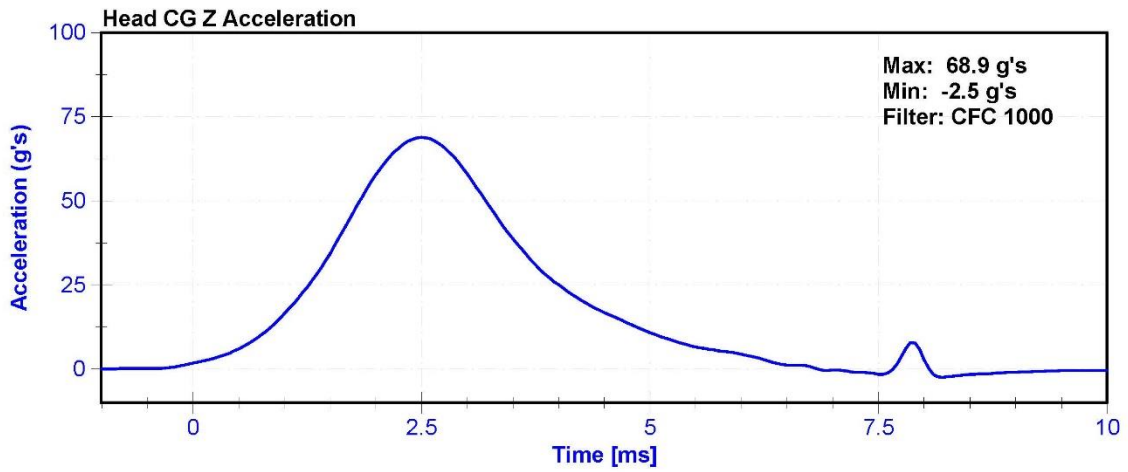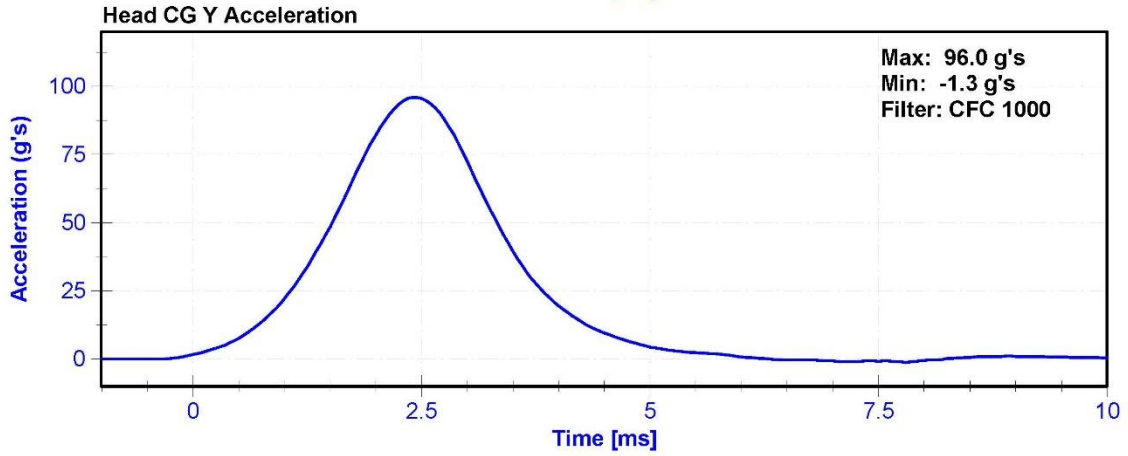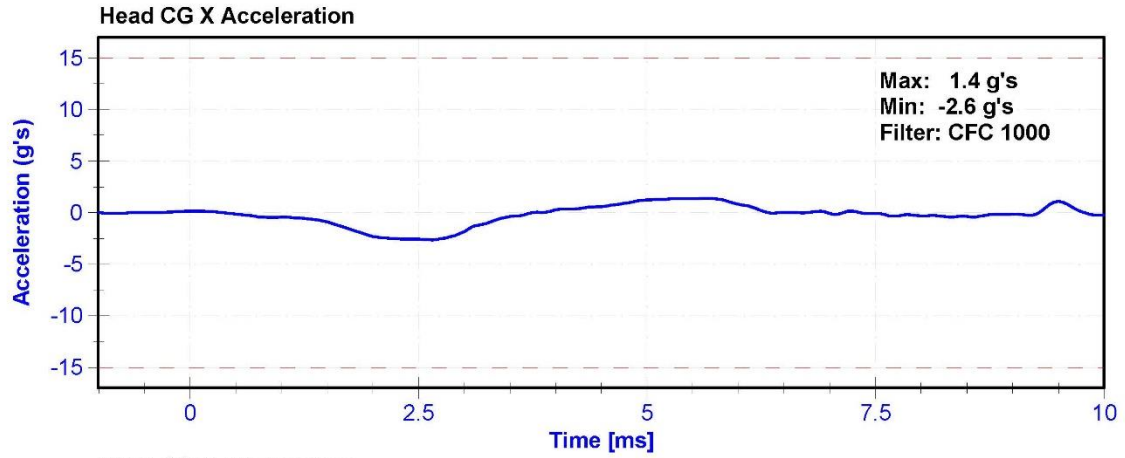


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	DG8012	Laboratory Supervisor	M. Goehle



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.6	Pass
Humidity	10	70	%	46.1	Pass
Velocity	5.51	5.63	m/s	5.620	Pass
Pendulum Impulse at 10ms	2.2	2.8	m/s	2.44	Pass
Pendulum Impulse at 15ms	3.3	4.1	m/s	3.61	Pass
Pendulum Impulse at 20ms	4.4	5.4	m/s	4.86	Pass
Pendulum Impulse at 25ms	5.4	6.1	m/s	5.77	Pass
Pendulum Impulse from 25 to 100ms	5.5	6.2	m/s	5.89	Pass
Neck Rotation	71	81	deg	74.6	Pass
Time at Maximum Rotation	50	70	ms	59.4	Pass
Moment about the OC	36	44	Nm	41.7	Pass
Moment Decay to 0 Nm	102	126	ms	111.9	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5F3	5/10/2016	5/10/2017
Pendulum Potentiometer	Denton 78051-342	DS-184Pend	10/12/2016	10/12/2017
Condyle Potentiometer	Denton 78051-342	DS-185Pend	10/12/2016	10/12/2017
Upper Neck Load Cell	DENTON 1716A	LC-1629Fy	5/24/2016	5/24/2017

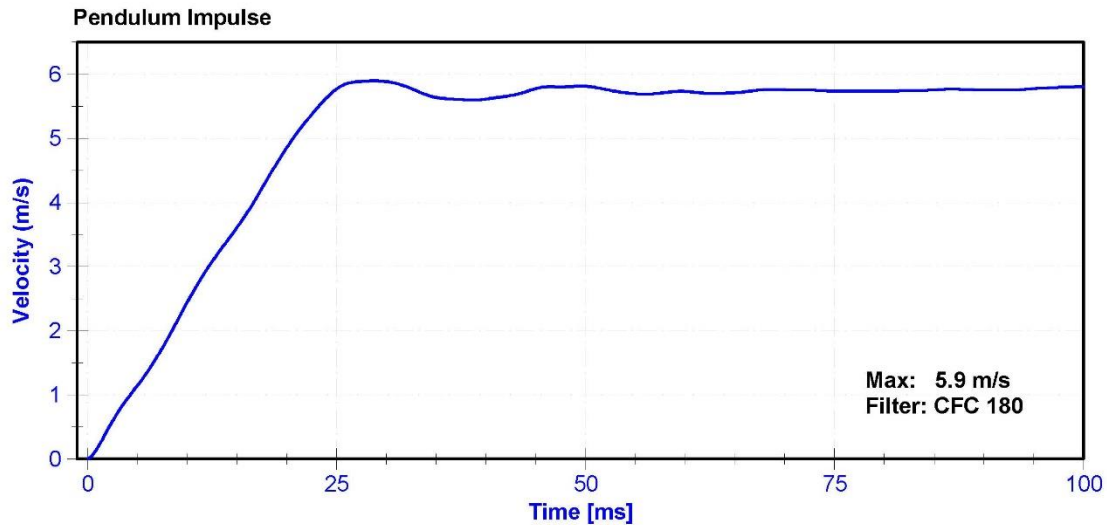

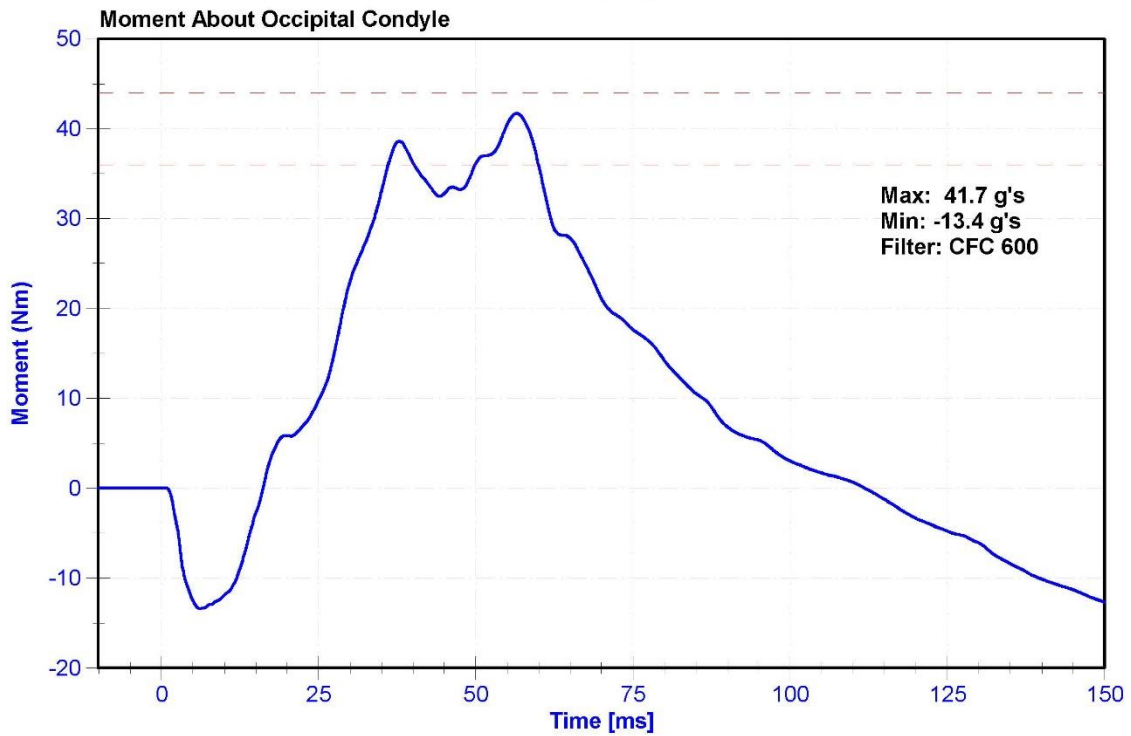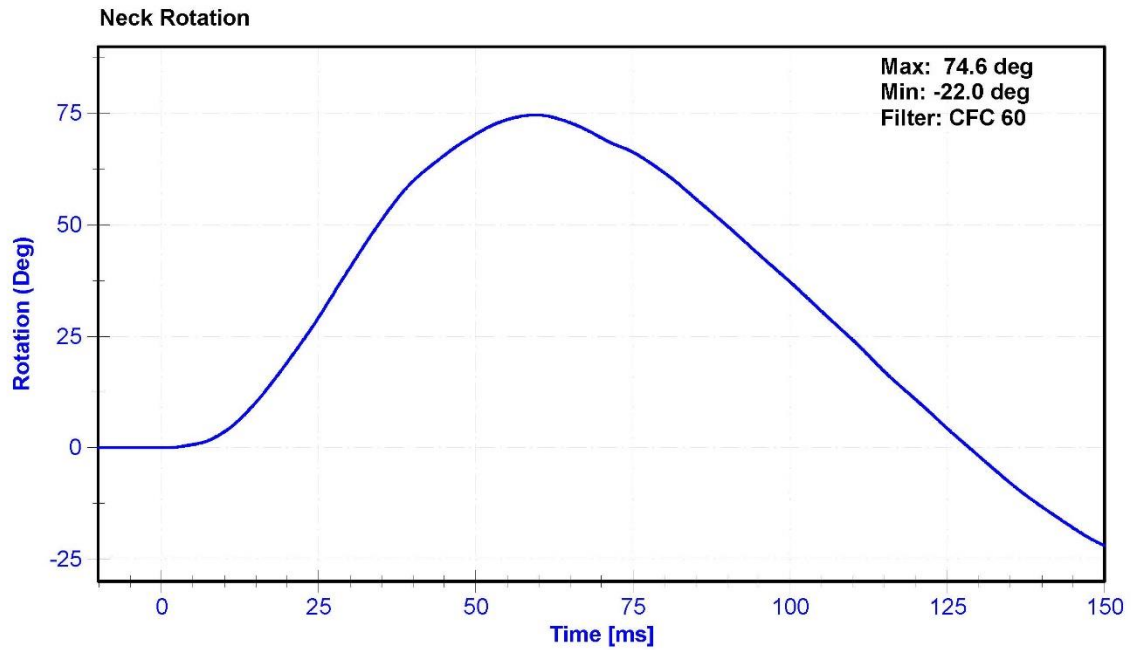


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	DG8012	Laboratory Supervisor	M. Goehle



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.2	Pass
Humidity	10	70	%	36.8	Pass
Velocity	4.2	4.4	m/s	4.31	Pass
Probe Acceleration	13	18	g's	15.8	Pass
Shoulder Deflection	28	37	mm	29.0	Pass
Lateral Upper Spine Acceleration	17	22	g's	20.3	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P16593	4/1/2016	4/1/2017
Shoulder Potentiometer	Servo 08TC1-3745	DS-1845GFE	6/15/2016	6/15/2017
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P51875	10/4/2016	4/4/2017

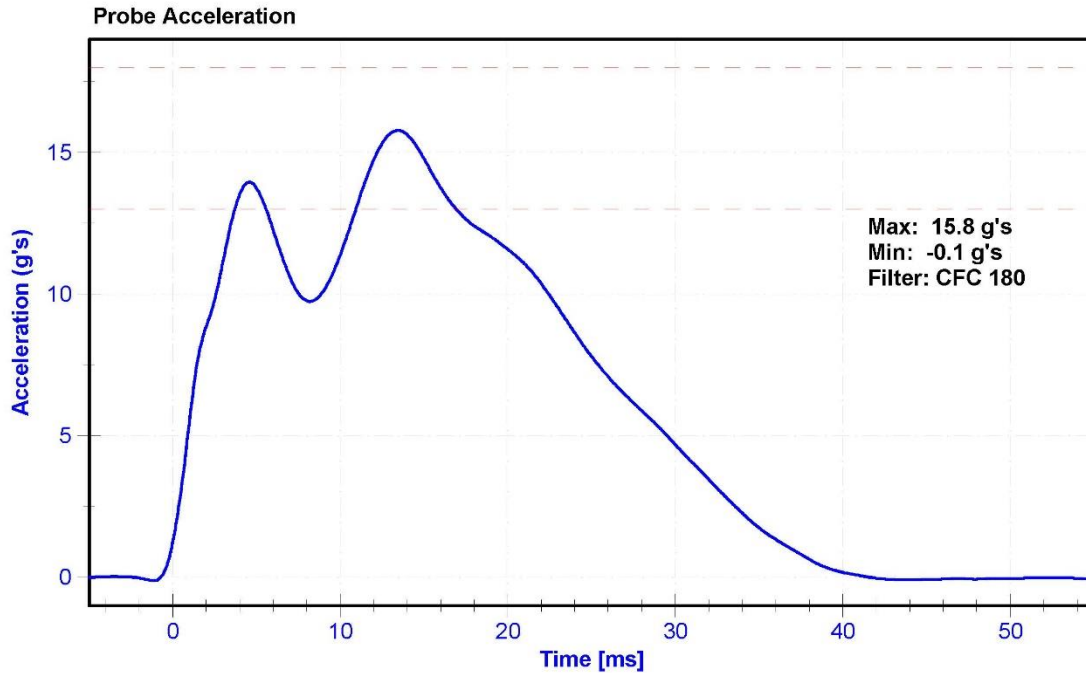

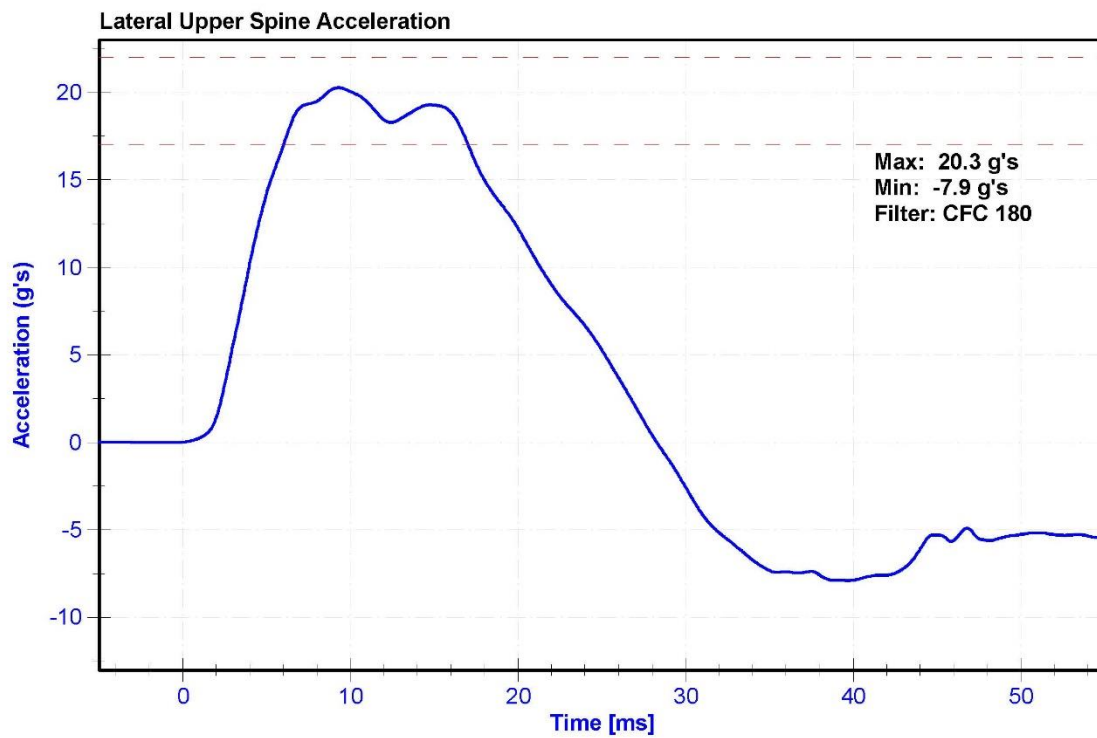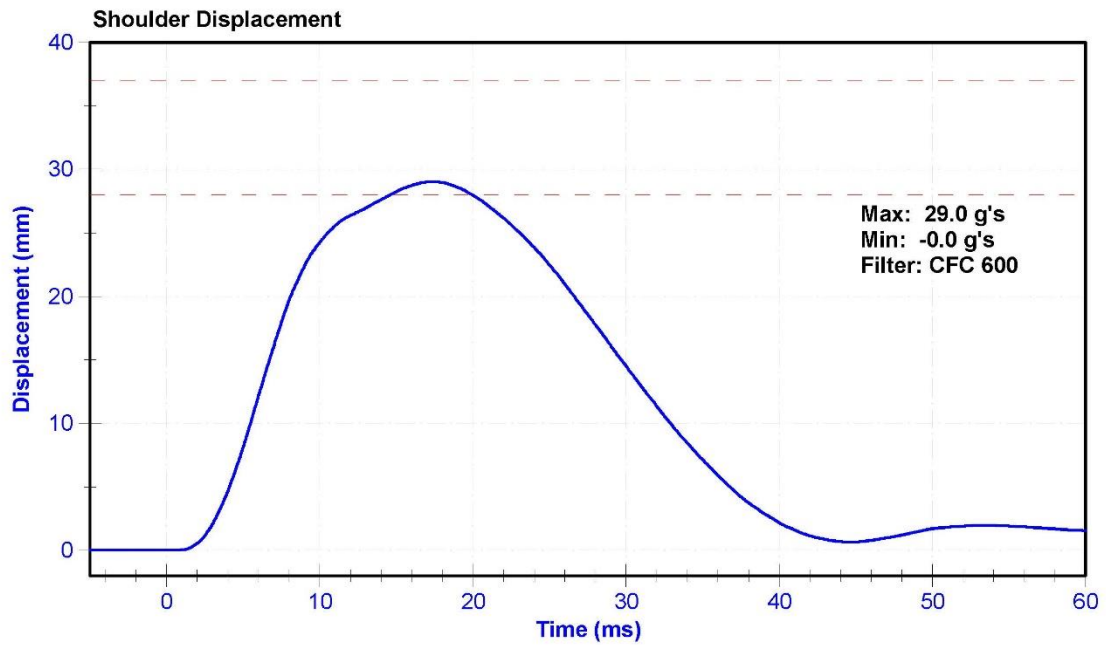


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	DG8012	Laboratory Supervisor	M. Goehle


**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.2	Pass
Humidity	10	70	%	38.1	Pass
Velocity	6.6	6.8	m/s	6.68	Pass
Probe Acceleration after 5 ms	30	36	g's	32.7	Pass
Lateral Upper Spine Acceleration	34	43	g's	38.4	Pass
Lateral Lower Spine Acceleration	29	37	g's	33.7	Pass
Shoulder Deflection	31	40	mm	32.7	Pass
Upper Thorax Rib Deflection	25	32	mm	28.0	Pass
Mid Thorax Rib Deflection	30	36	mm	32.6	Pass
Lower Thorax Rib Deflection	32	38	mm	34.3	Pass


**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P16593	4/1/2016	4/1/2017
Upper Spine T1 Y Accelerometer	ENDEVCO 7264CT	AC-P51875	10/4/2016	4/4/2017
Upper Spine T12 Y Accelerometer	ENDEVCO 7264	AC-P83319	10/4/2016	4/4/2017
Shoulder Potentiometer	Servo 08TC1-3745	DS-1845GFE	6/15/2016	6/15/2017
Upper Thorax Rib Potentiometer	Servo 08TC1-3621	DS-808GFE	6/15/2016	6/15/2017
Middle Thorax Rib Potentiometer	Servo 08TC1-3745	DS-1514GFE	6/15/2016	6/15/2017
Lower Thorax Rib Potentiometer	Servo 08TC1-3787	DS-011GFE	6/15/2016	6/15/2017

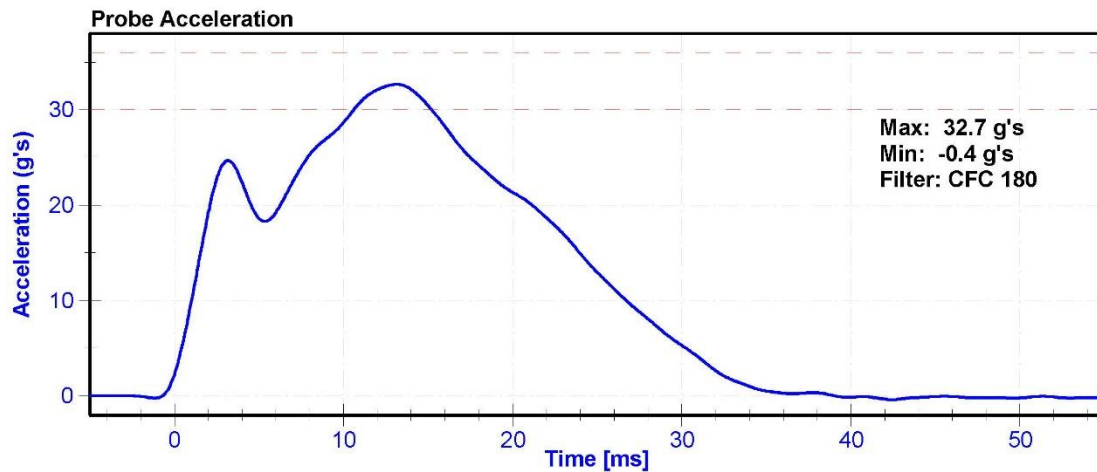


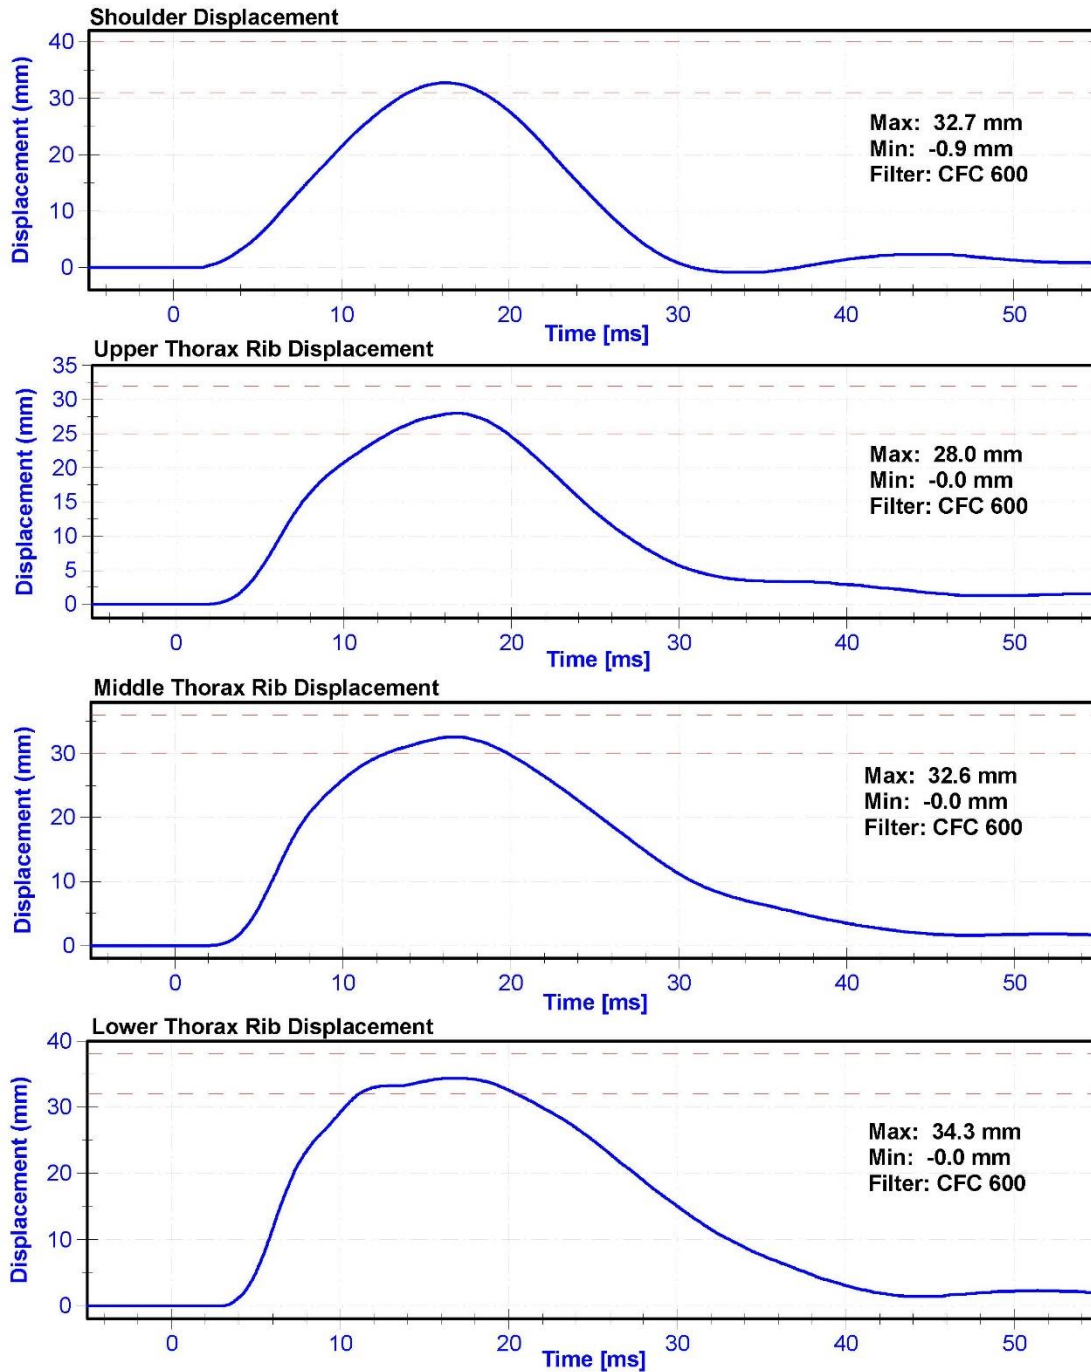

Lateral Upper Spine Acceleration

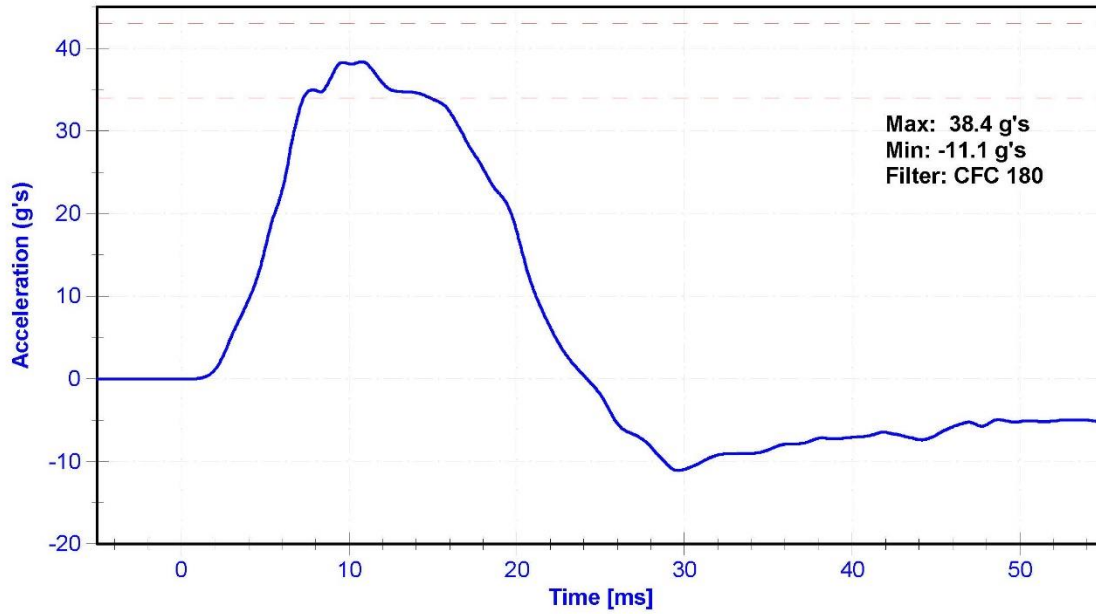

Lateral Lower Spine Acceleration

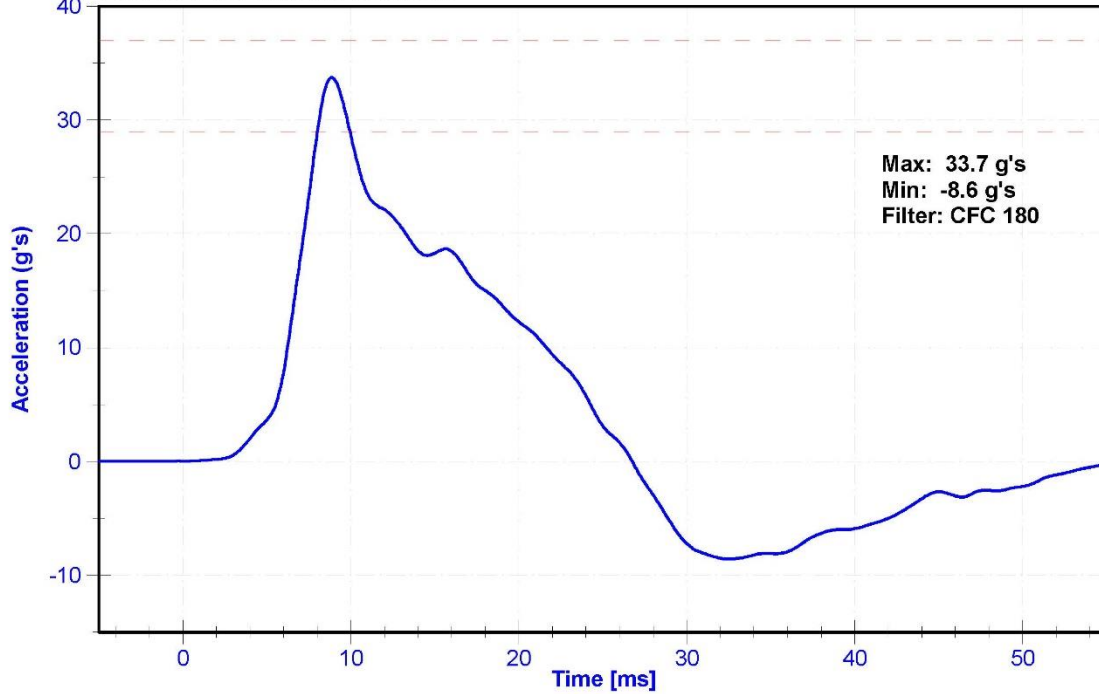


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	DG8012	Laboratory Supervisor	M. Goehle




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.2	Pass
Humidity	10	70	%	42.3	Pass
Velocity	4.2	4.4	m/s	4.31	Pass
Probe Acceleration	14	18	g's	16.1	Pass
Lateral Upper Spine Acceleration	13	17	g's	15.9	Pass
Lateral Lower Spine Acceleration	7	11	g's	9.8	Pass
Upper Thorax Rib Deflection	32	40	mm	38.1	Pass
Middle Thorax Rib Deflection	39	45	mm	41.9	Pass
Lower Thorax Rib Deflection	35	43	mm	36.5	Pass


**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P16593	4/1/2016	4/1/2017
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P51875	10/4/2016	4/4/2017
Lower Spine Y Accelerometer	ENDEVCO 7264	AC-P83319	10/4/2016	4/4/2017
Upper Thorax Rib Potentiometer	Servo 08TC1-3621	DS-808GFE	6/15/2016	6/15/2017
Middle Thorax Rib Potentiometer	Servo 08TC1-3745	DS-1514GFE	6/15/2016	6/15/2017
Lower Thorax Rib Potentiometer	Servo 08TC1-3787	DS-011GFE	6/15/2016	6/15/2017

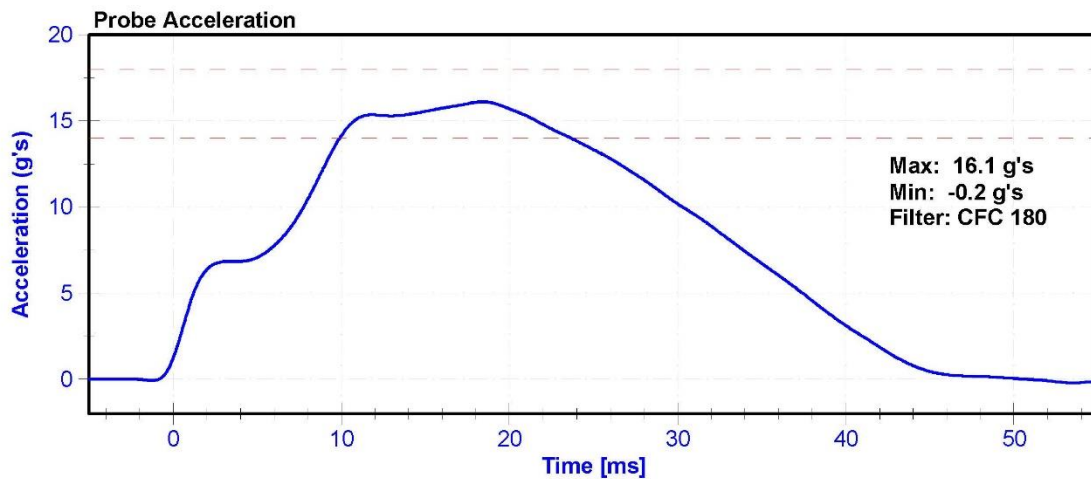


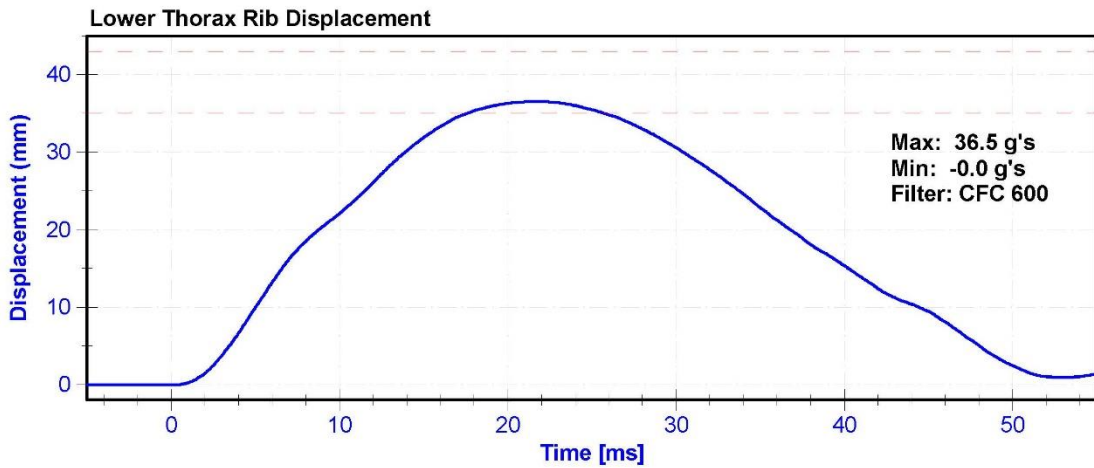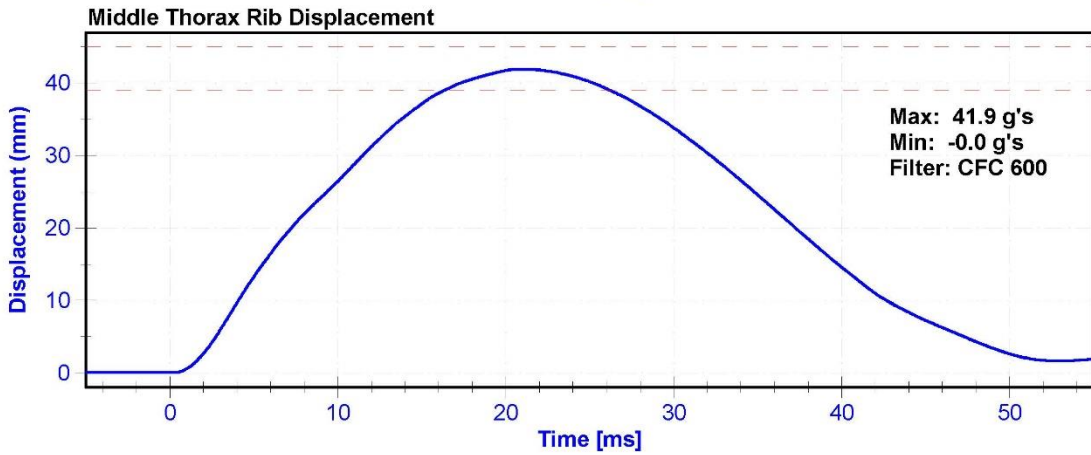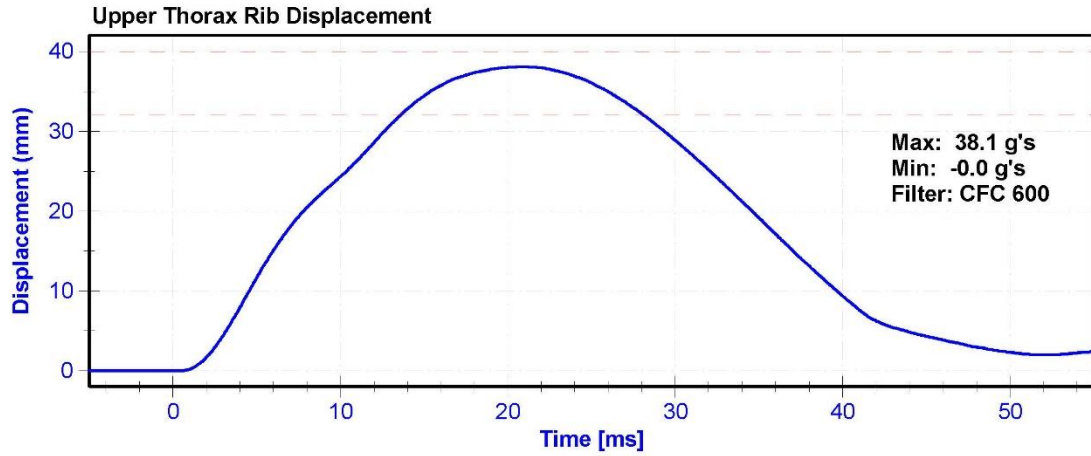

Lateral Upper Spine Acceleration

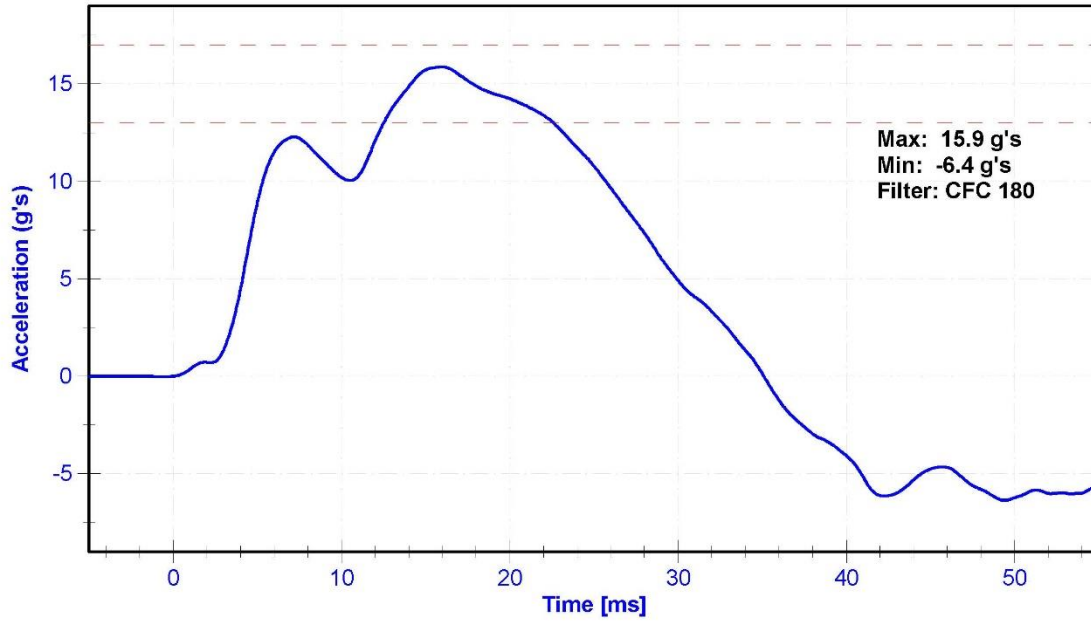

Lateral Lower Spine Acceleration

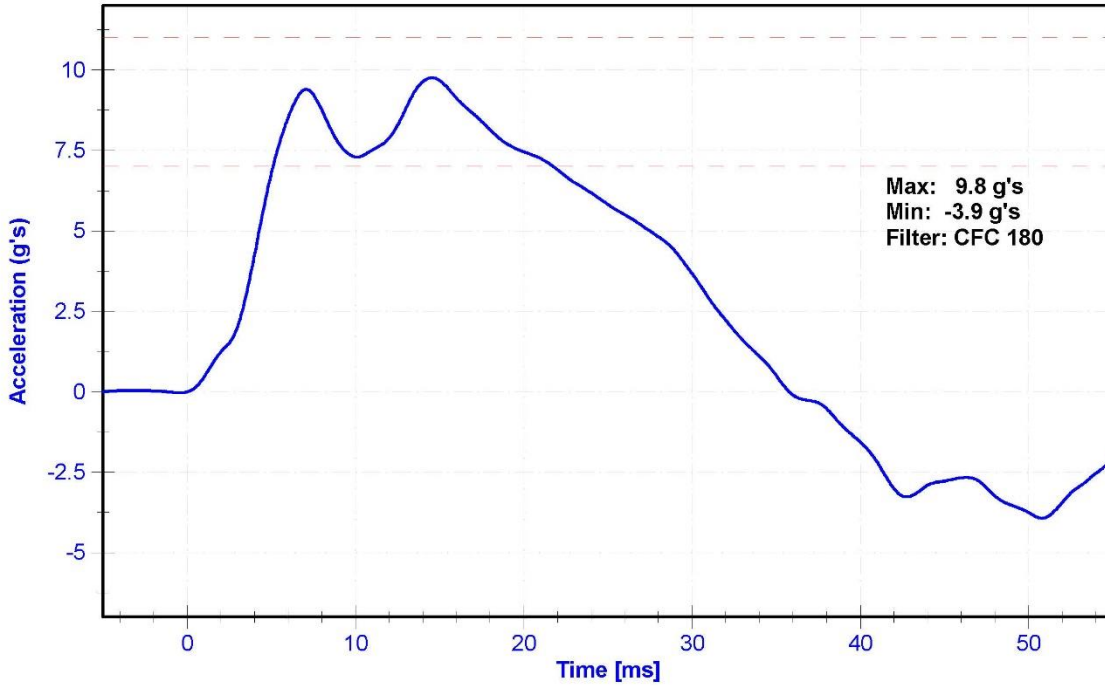


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	DG8012	Laboratory Supervisor	M. Goehle



**Results**


Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.2	Pass
Humidity	10	70	%	40.6	Pass
Velocity	4.2	4.4	m/s	4.32	Pass
Probe Acceleration	12	16	g's	13.7	Pass
Lateral Lower Spine Acceleration	9	14	g's	10.0	Pass
Upper Abdomen Rib Deflection	36	47	mm	45.3	Pass
Lower Abdomen Rib Deflection	33	44	mm	40.5	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	ENDEVCO 7264CT	AC-P16593	4/1/2016	4/1/2017
Lower Spine Y Accelerometer	ENDEVCO 7264	AC-P83319	10/4/2016	4/4/2017
Upper Abdomen Rib Potentiometer	Servo 08TC1-3787	DS-015GFE	6/15/2016	6/15/2017
Lower Abdomen Rib Potentiometer	Servo 08TC1-3745	DS-1774GFE	6/15/2016	6/15/2017

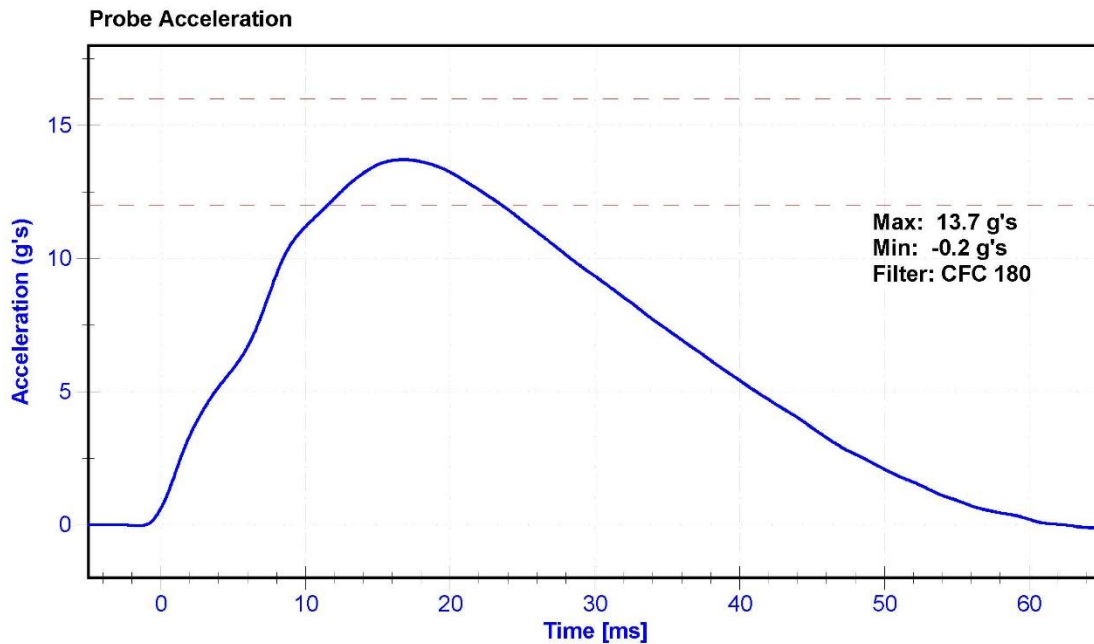

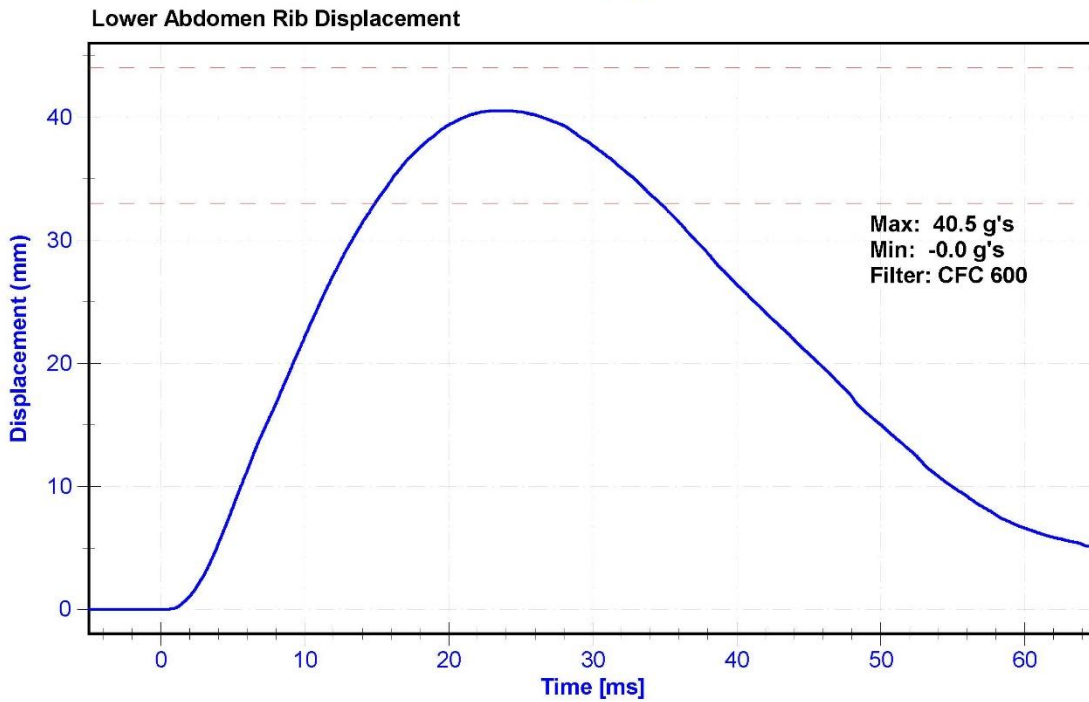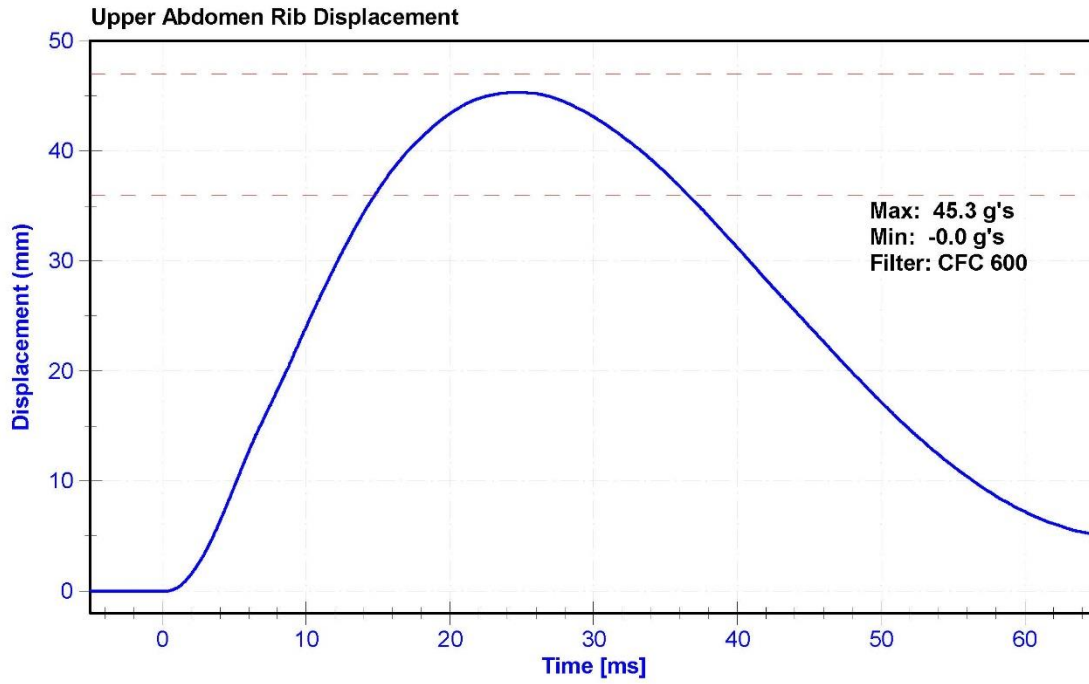

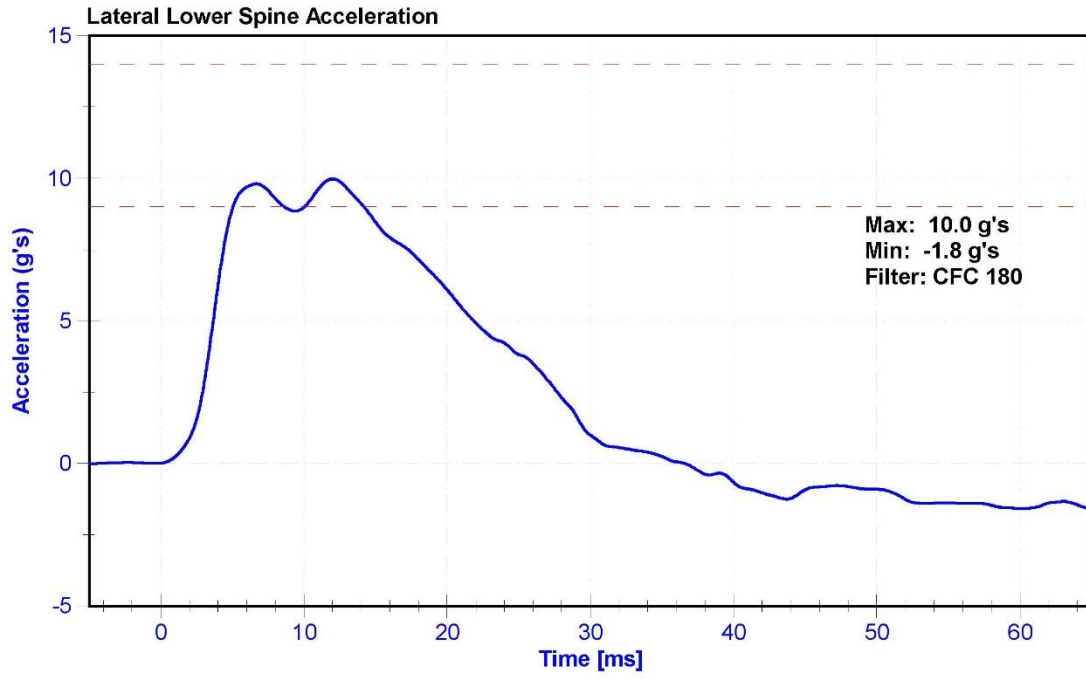


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	DG8012	Laboratory Supervisor	M. Goehle



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	39.5	Pass
Velocity	6.6	6.8	m/s	6.66	Pass
Probe Acceleration	38	47	g's	44.2	Pass
Lateral Pelvis Acceleration after 6ms	34	42	g's	40.4	Pass
Acetabulum Force	3600	4300	N	4044.1	Pass


**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P16593	4/1/2016	4/1/2017
Pelvis Y Accelerometer	ENDEVCO 7264CT	AC-P63561	10/3/2016	4/3/2017
Acetabulum Load Cell	Denton 3249J	LC-267Fy	5/24/2016	5/24/2017
Certification Plug	Humanetics	79515	11/05/2014	N/A
Crash Test Plug	Humanetics	79582	11/05/2014	N/A

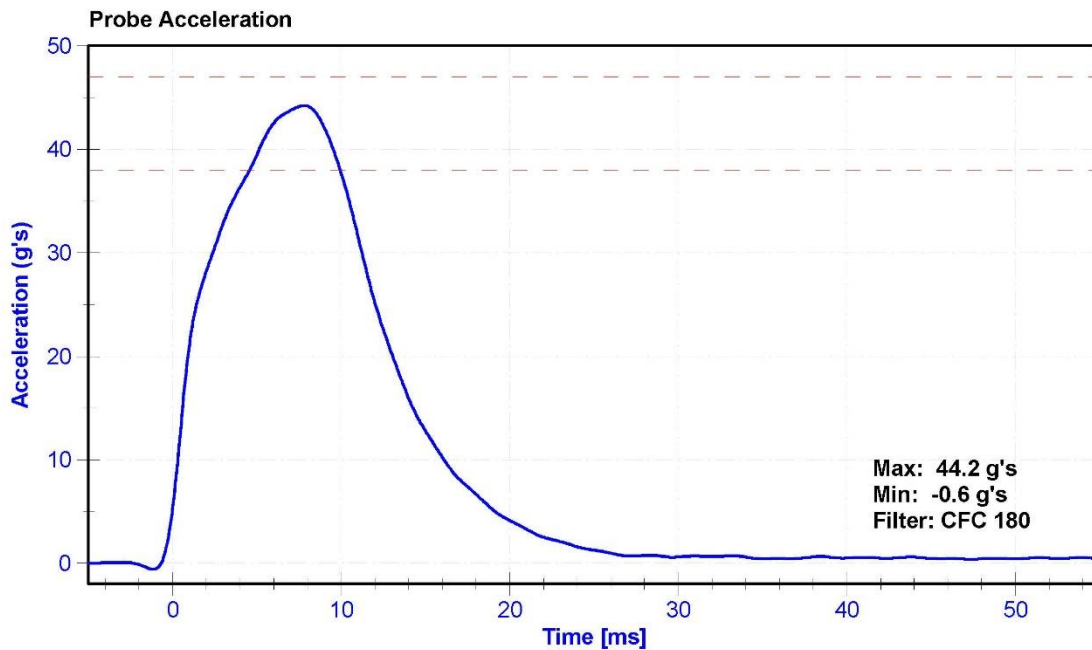

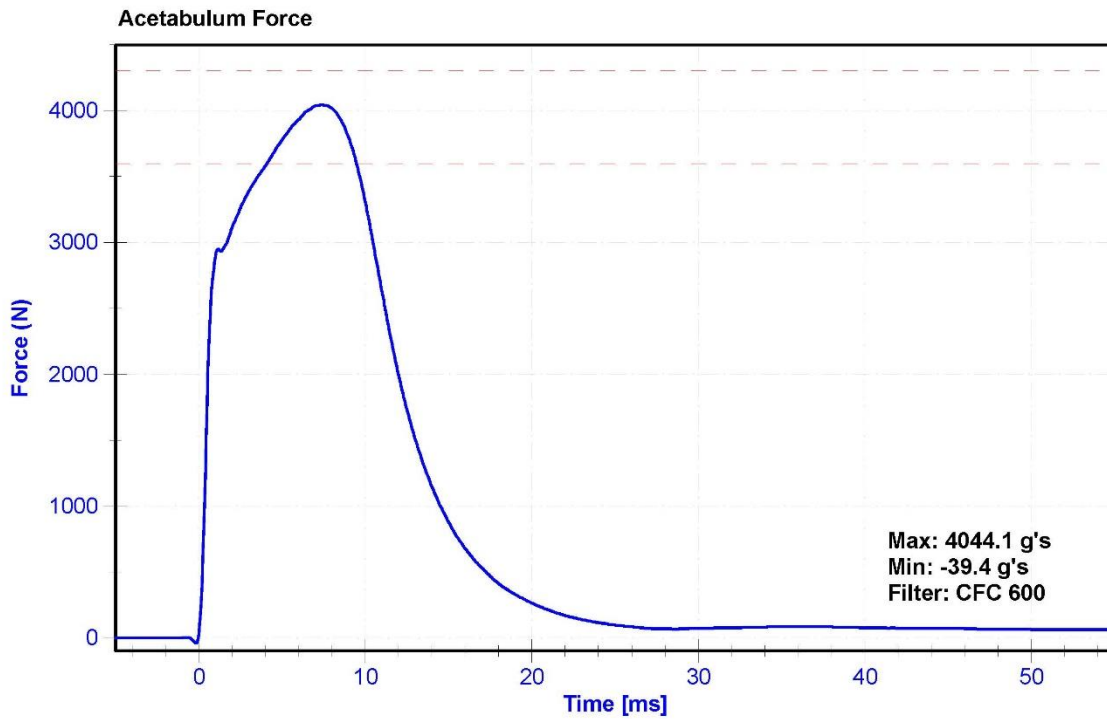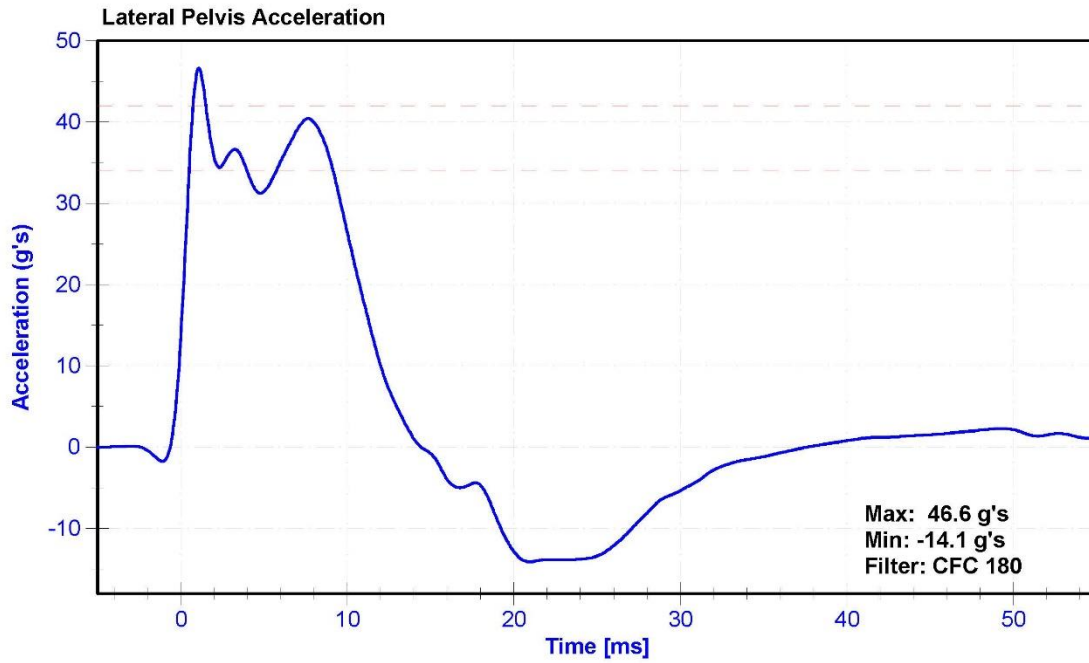

**Resultant Data - SIDIIs Plug Compression**

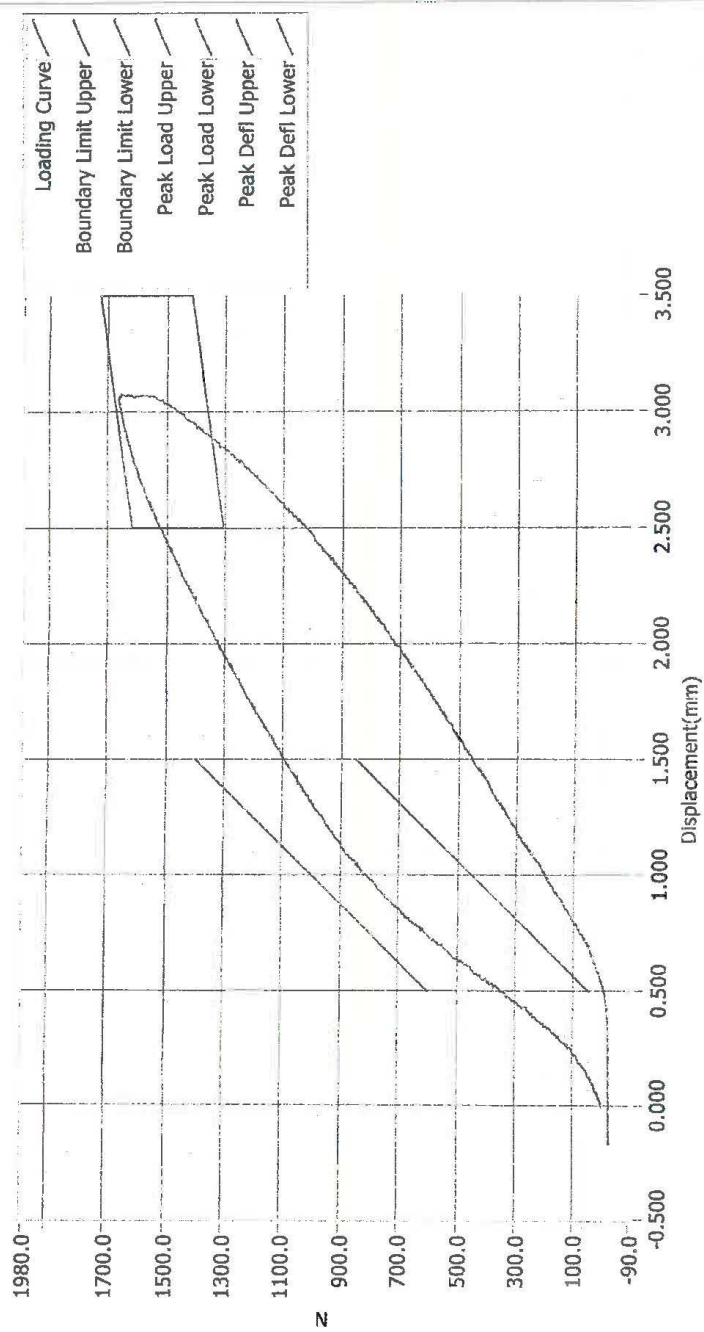


ATD Calibration Lab  
 CERTIFICATION  
 1655N  
 10/12/16 MKG

Test ID	Part Serial Number	Test Date	Test Time
	79515	11/5/2014	5:37 PM

Cert ID	ATD Serial Number	ATD Type
	N/A	SIDIIs

Current Date : 11/5/2014      Current Time : 17:42:29

### Resultant Data - SIDIIs Plug Compression

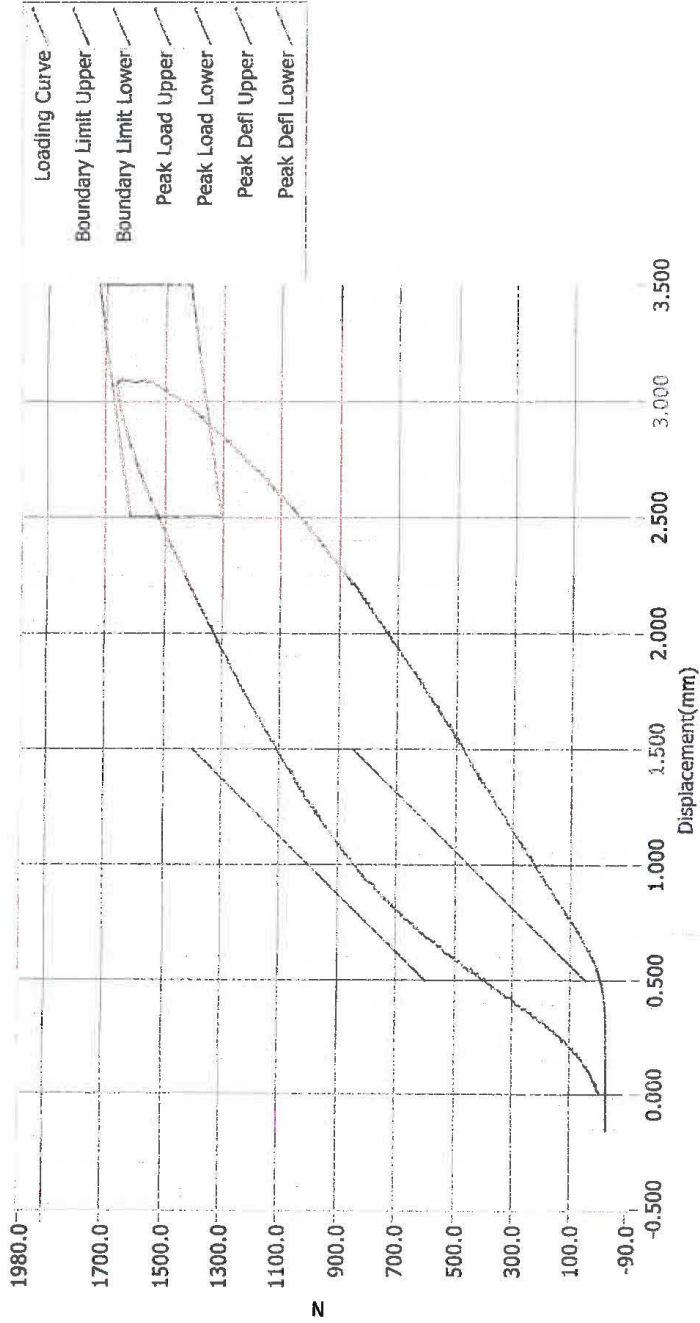

### ATD Calibration Lab

C:RAS H  
1/655N  
10/1-2/16 MKG

Test ID	Part Serial Number	Test Date	Test Time
	79582	11/5/2014	8:56 PM
Cert ID	ATD Serial Number	ATD Type	
	N/A	SIDIIs	

Current Date : 11/5/2014      Current Time : 20:58:14


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	DG8012	Laboratory Supervisor	M. Goehle



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.1	Pass
Humidity	10	70	%	42.9	Pass
Velocity	4.2	4.4	m/s	4.31	Pass
Probe Acceleration	36	45	g's	41.6	Pass
Lateral Pelvis Acceleration	28	39	g's	34.6	Pass
Iliac Force	4100	5100	N	4751.4	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P16593	4/1/2016	4/1/2017
Pelvis Y Accelerometer	ENDEVCO 7264CT	AC-P63561	10/3/2016	4/3/2017
Iliac Load Cell	DENTON 3228J	LC-281Fy	5/24/2016	5/24/2017

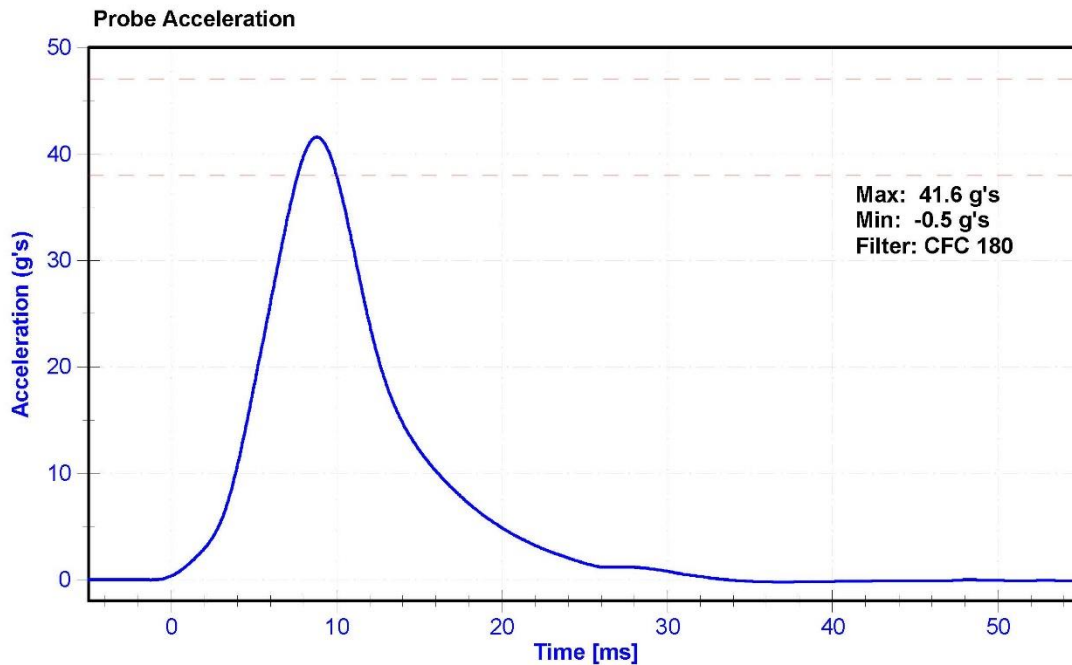

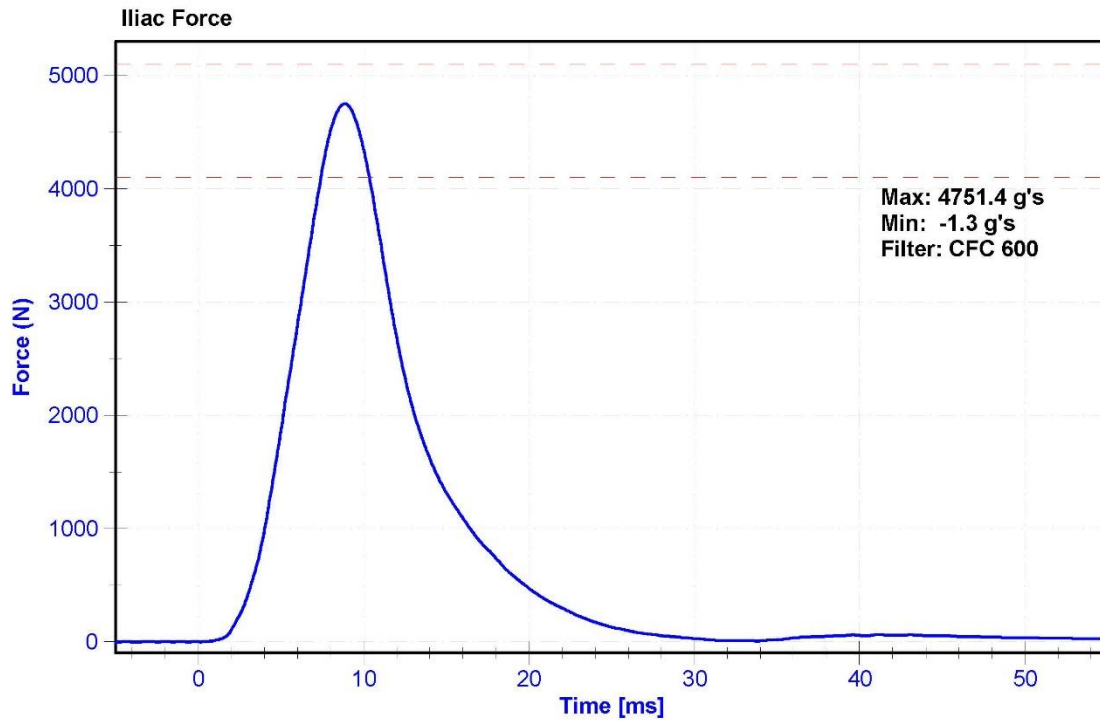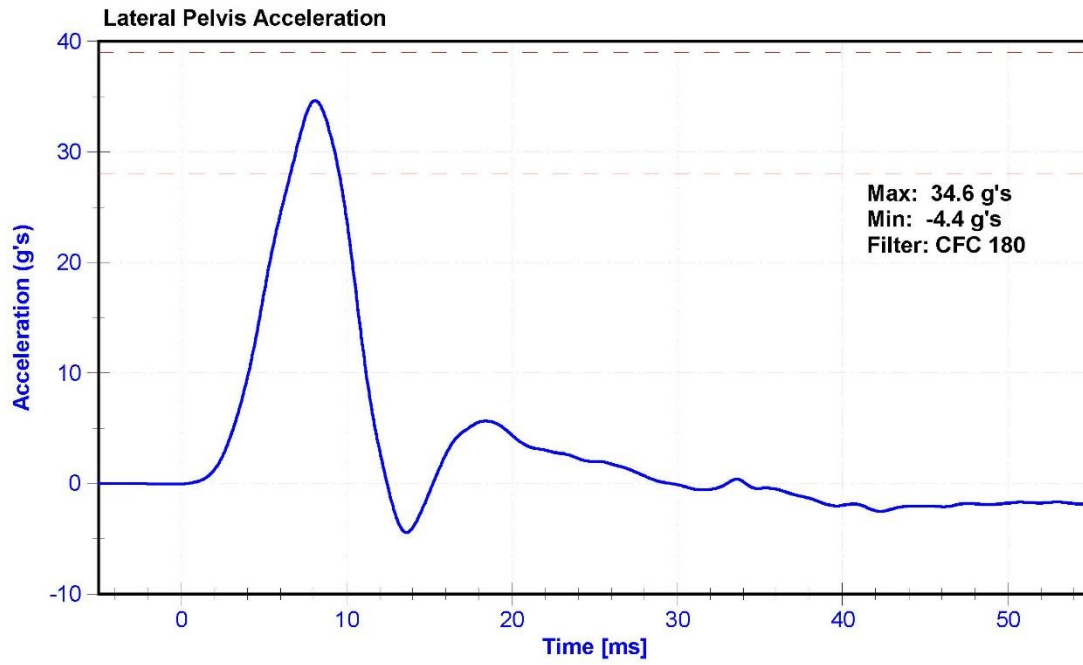

**CALIBRATION TEST RESULTS**

**POST-TEST**

**EUROSID 2 (ES-2RE) MALE – DRIVER ATD**

**SERIAL NO: F034**

**(CONFIGURED FOR LEFT SIDE IMPACT)**




External Measurements - EuroSID-2re


Technician: M.Hartung

Date: 11/14/2016

Dummy Serial Number: F034

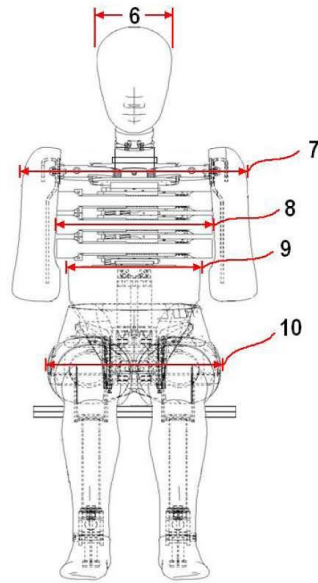

FRONT VIEW

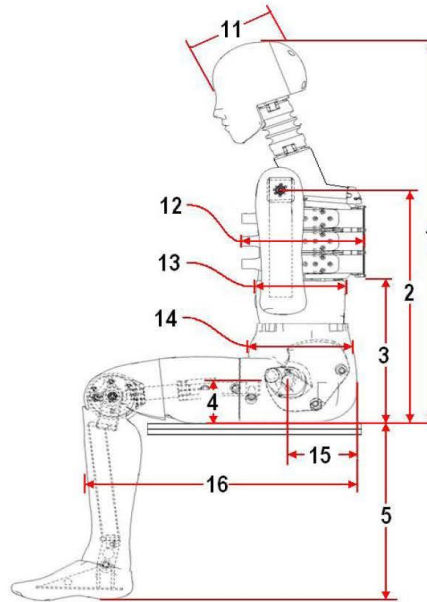

SIDE VIEW

Dim. No.	Description	Specification (mm)		Result (mm)	Pass/Fail
1	Sitting Height	900	918	909	Pass
2	Seat to Shoulder Joint	558	572	568	Pass
3	Seat to Lower Face of Thoracic Spine Box	346	356	349	Pass
4	Seat to Hip Joint (center of bolt)	97	103	102	Pass
5	Sole to Seat, Sitting	333	451	419	Pass
6	Head Width	152	158	154	Pass
7	Shoulder/Arm Width	461	479	470	Pass
8	Thorax Width	322	332	330	Pass
9	Abdomen Width	273	287	280	Pass
10	Pelvis Lap Width	359	373	366	Pass
11	Head Depth	196	206	202	Pass
12	Thorax Depth	262	272	269	Pass
13	Abdomen Depth	194	204	201	Pass
14	Pelvis Depth	235	245	238	Pass
15	Back of Buttocks to Hip Joint (center of bolt)	150	160	153	Pass
16	Back of Buttocks to Front Knee	597	615	606	Pass


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	34.0	Pass
Resultant Acceleration	125	155	g's	137.5	Pass
Oscillation	0	15	%	2.66	Pass
Fore-Aft Acceleration	-15	15	g's	9.1	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P58904	6/20/2016	12/19/2016
Y Accelerometer	ENDEVCO 7264CT	AC-P58911	6/20/2016	12/19/2016
Z Accelerometer	ENDEVCO 7264CT	AC-P58776	6/20/2016	12/19/2016

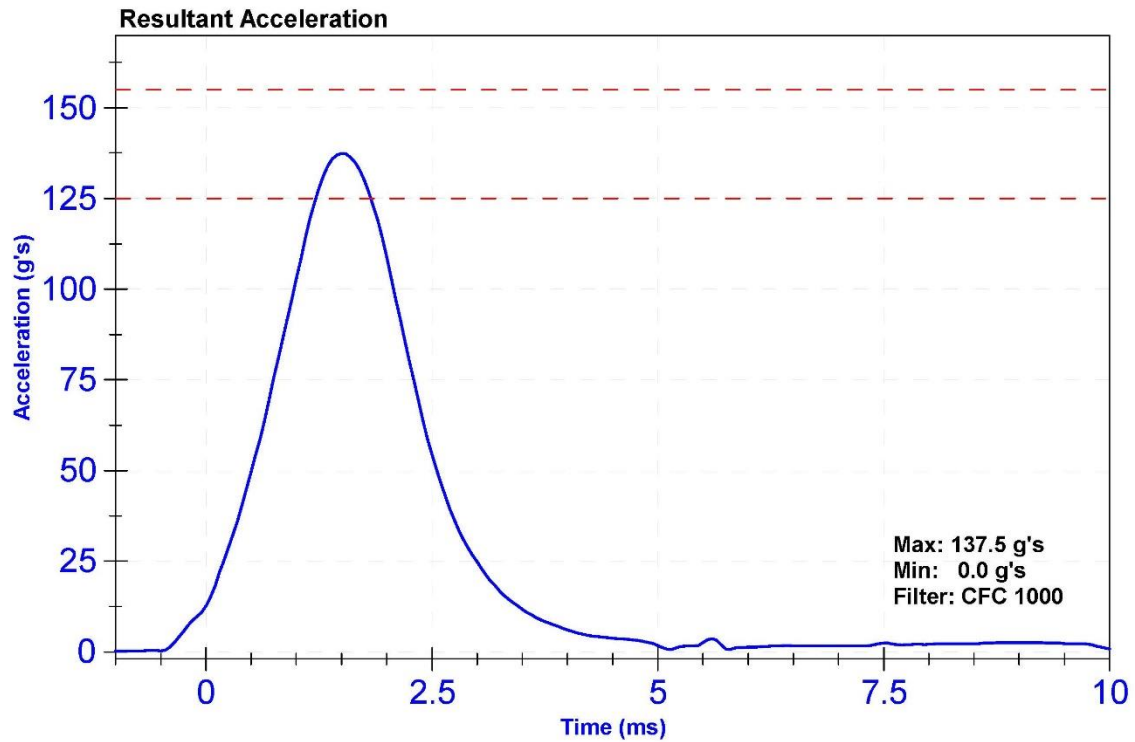

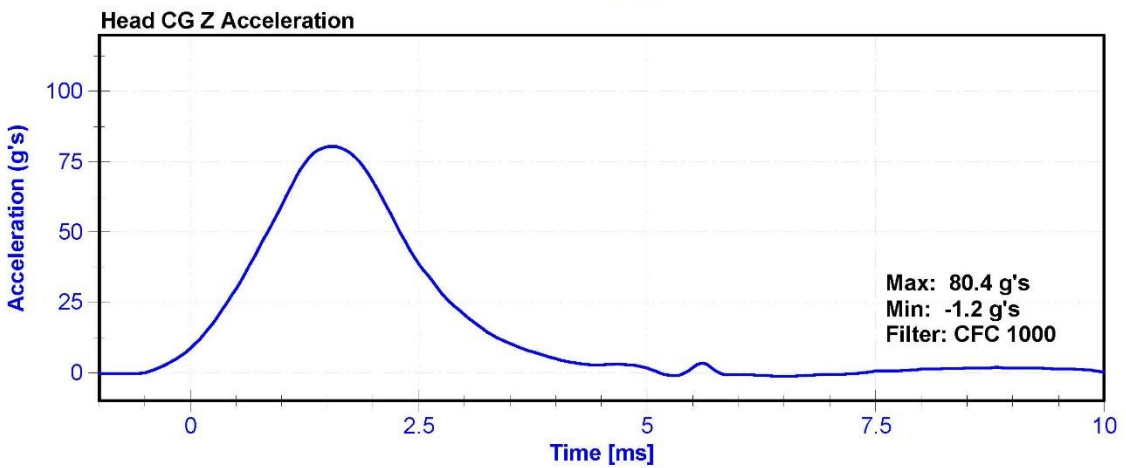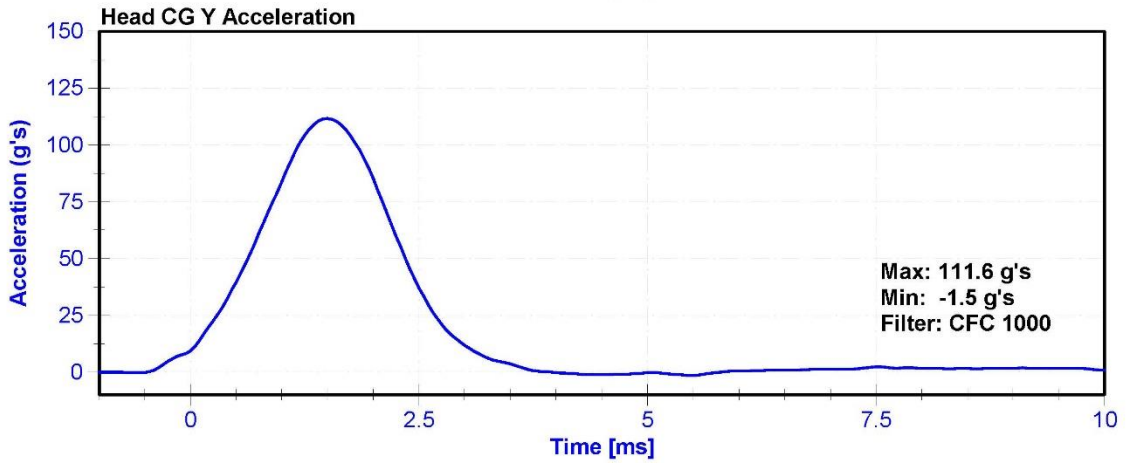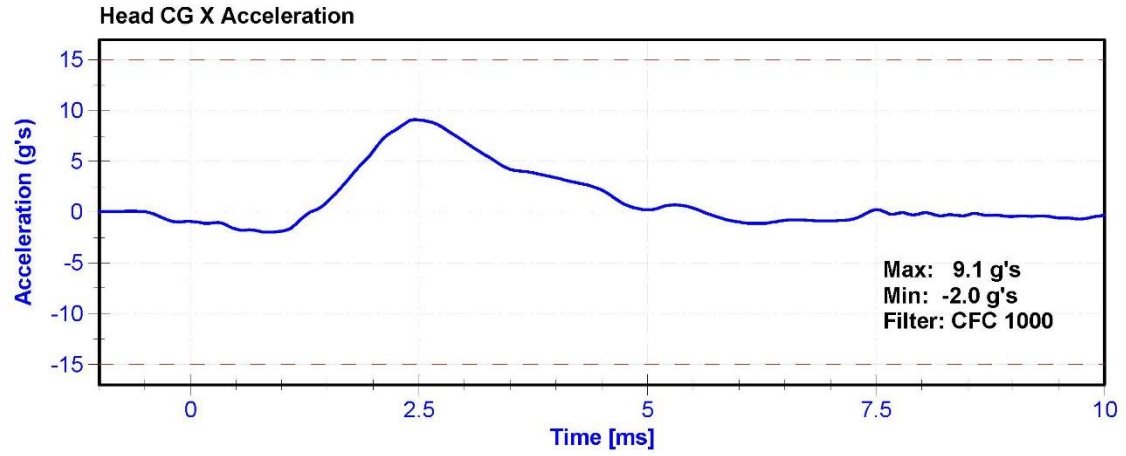


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.7	Pass
Humidity	10	70	%	29.2	Pass
Velocity	3.3	3.5	m/s	3.45	Pass
Lateral Neck Rotation	49	59	deg	53.0	Pass
Time at Maximum Rotation	54	66	ms	55.3	Pass
Time of Rotation Decay from Maximum	53	88	ms	60.3	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5F3	5/10/2016	5/10/2017
Front Pendulum Potentiometer	SP22G	DS-094	10/11/2016	10/11/2017
Headform Potentiometer	SP22G	DS-095	10/11/2016	10/11/2017

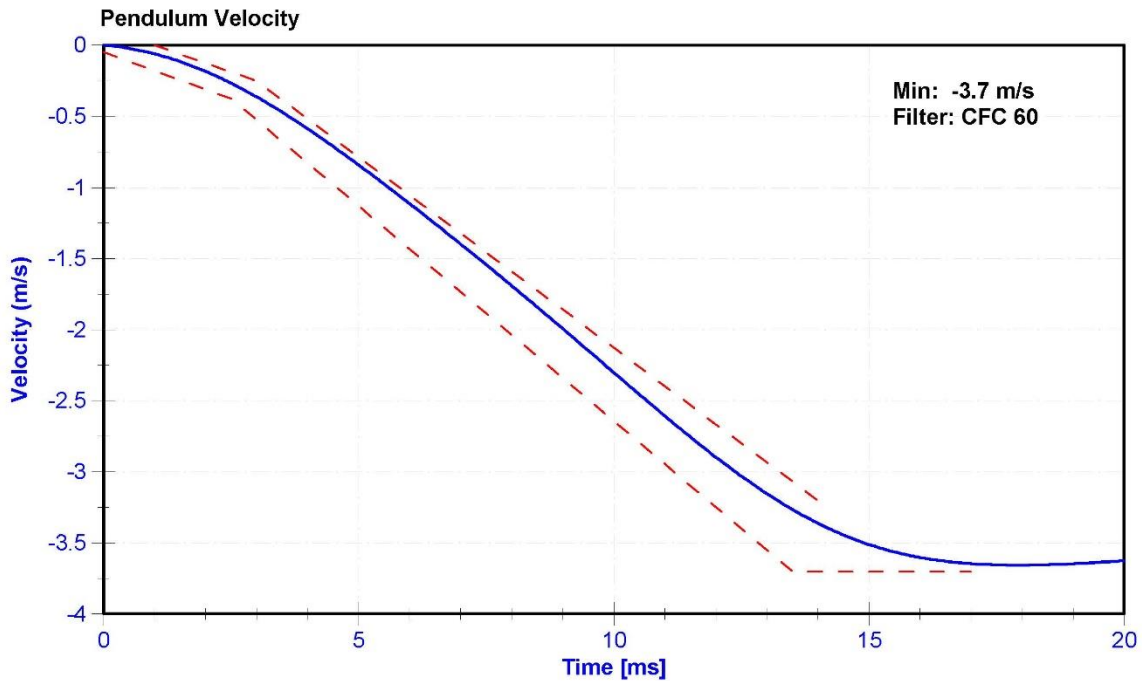

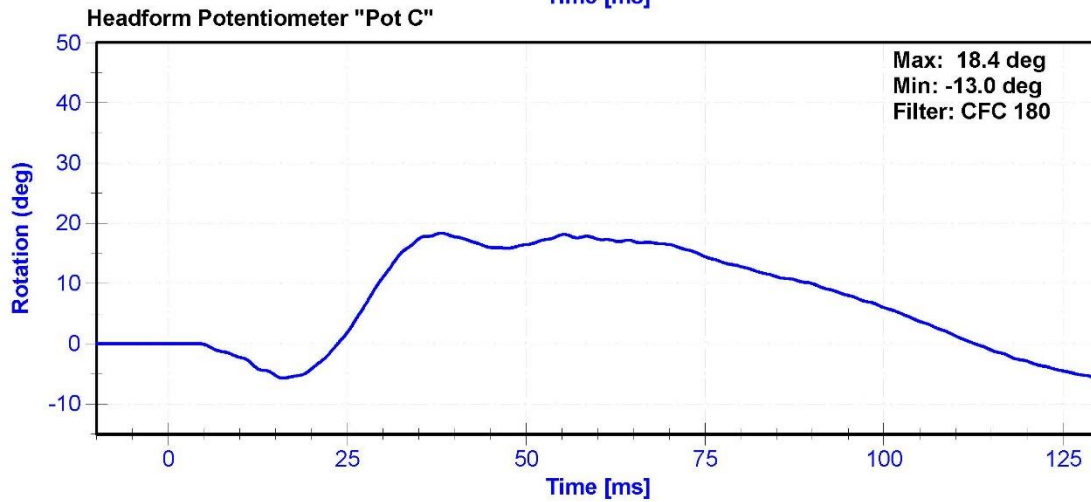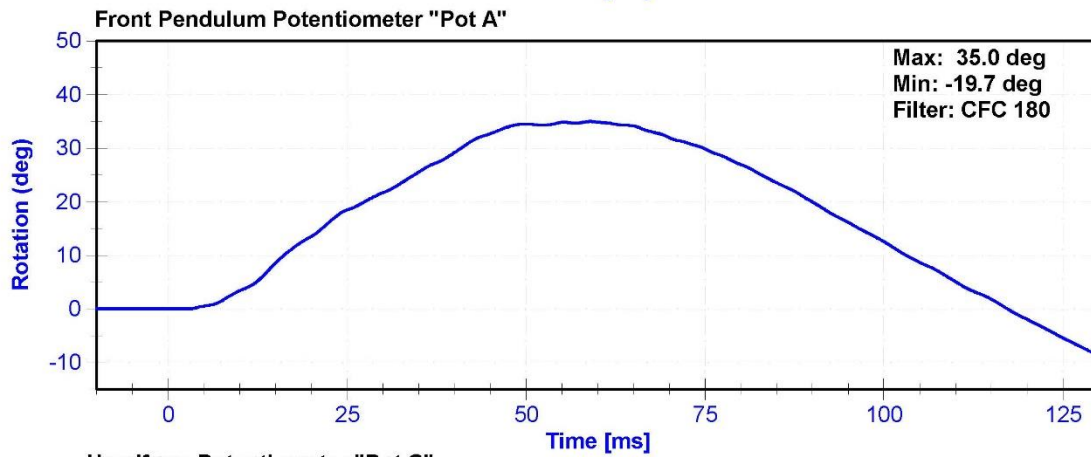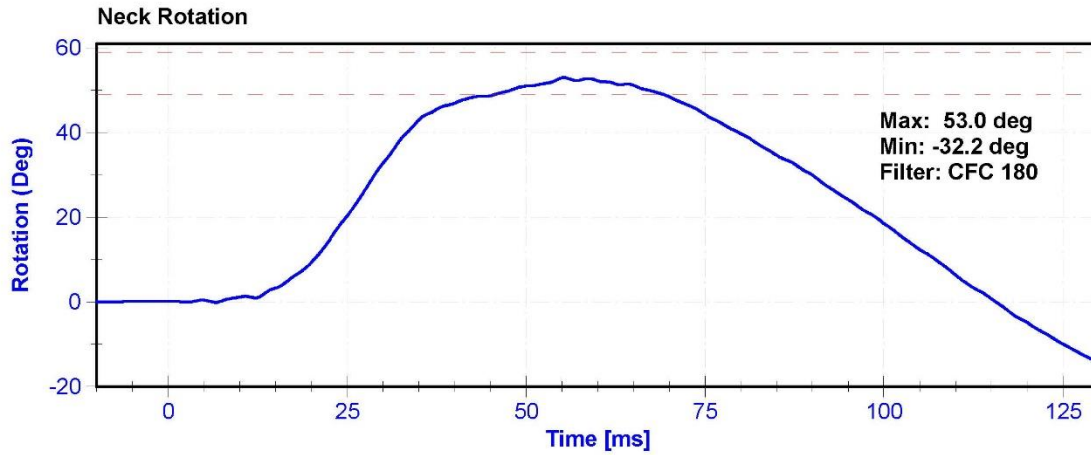


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.1	Pass
Humidity	10	70	%	33.2	Pass
Velocity	4.2	4.4	m/s	4.22	Pass
Probe Acceleration	7.5	10.5	g's	8.78	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	ENDEVCO 7264CT	AC-P21393	5/27/2016	11/25/2016

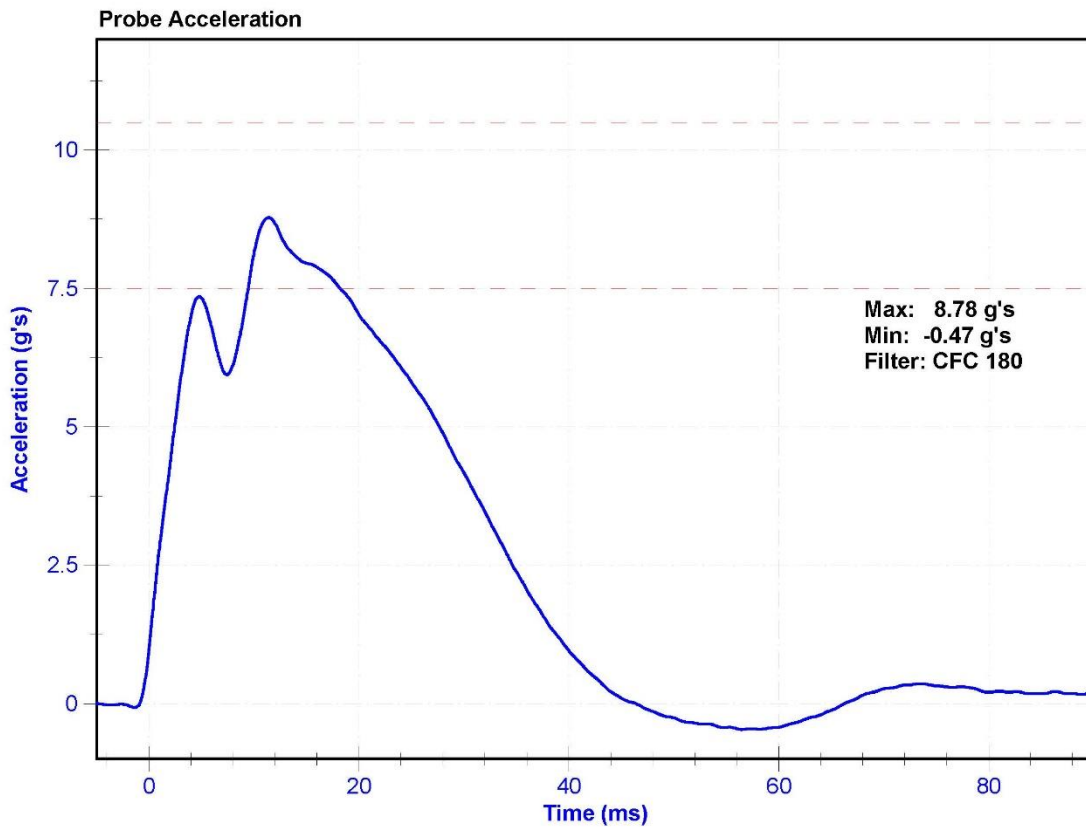


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.6	Pass
Humidity	10	70	%	30.0	Pass
Rib Displacement	36	40	mm	36.2	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-183GFE	6/20/2016	6/20/2017

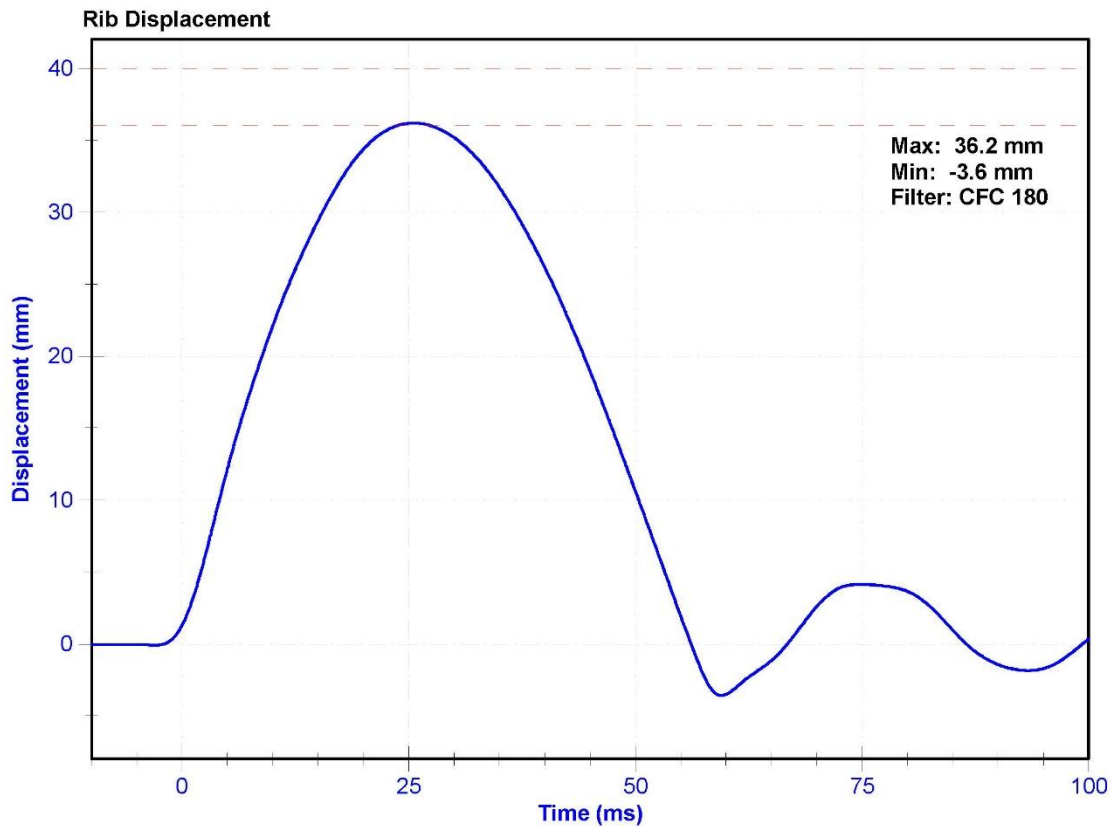


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.6	Pass
Humidity	10	70	%	30.0	Pass
Rib Displacement	46	51	mm	46.6	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-183GFE	6/20/2016	6/20/2017

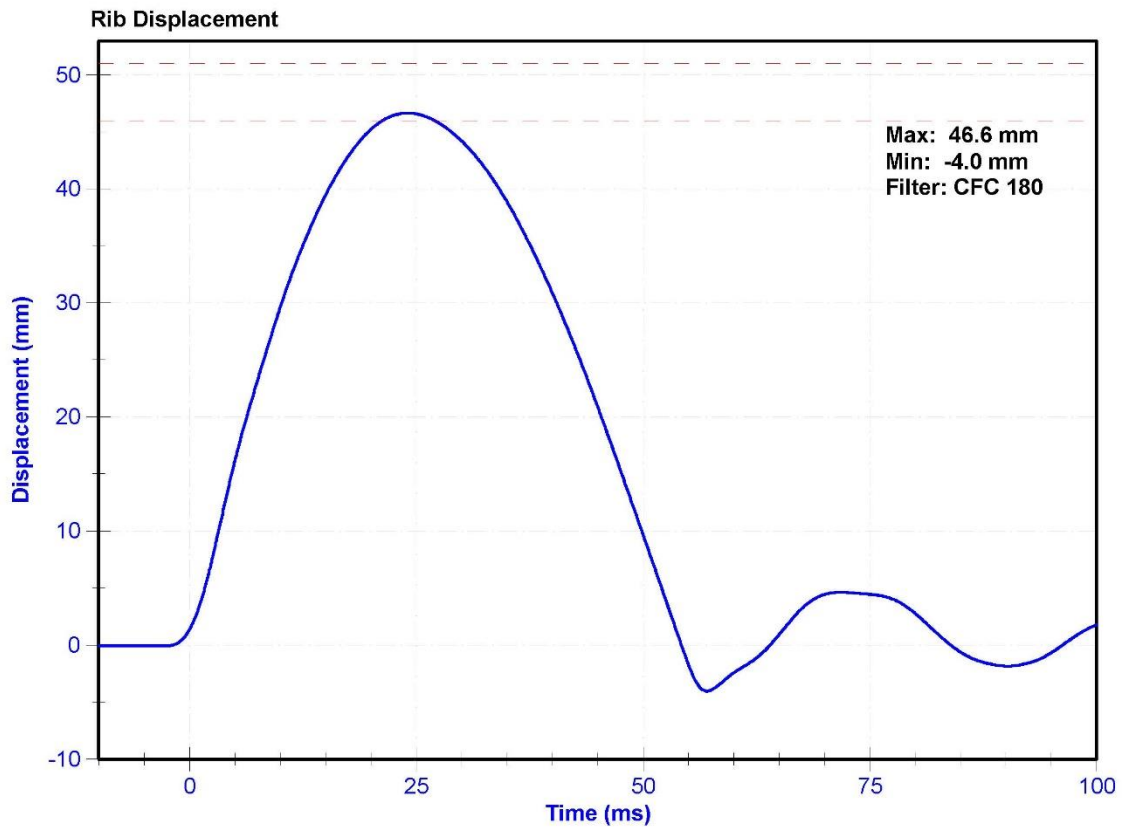


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.6	Pass
Humidity	10	70	%	30.0	Pass
Rib Displacement	36	40	mm	36.9	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-184GFE	6/20/2016	6/20/2017

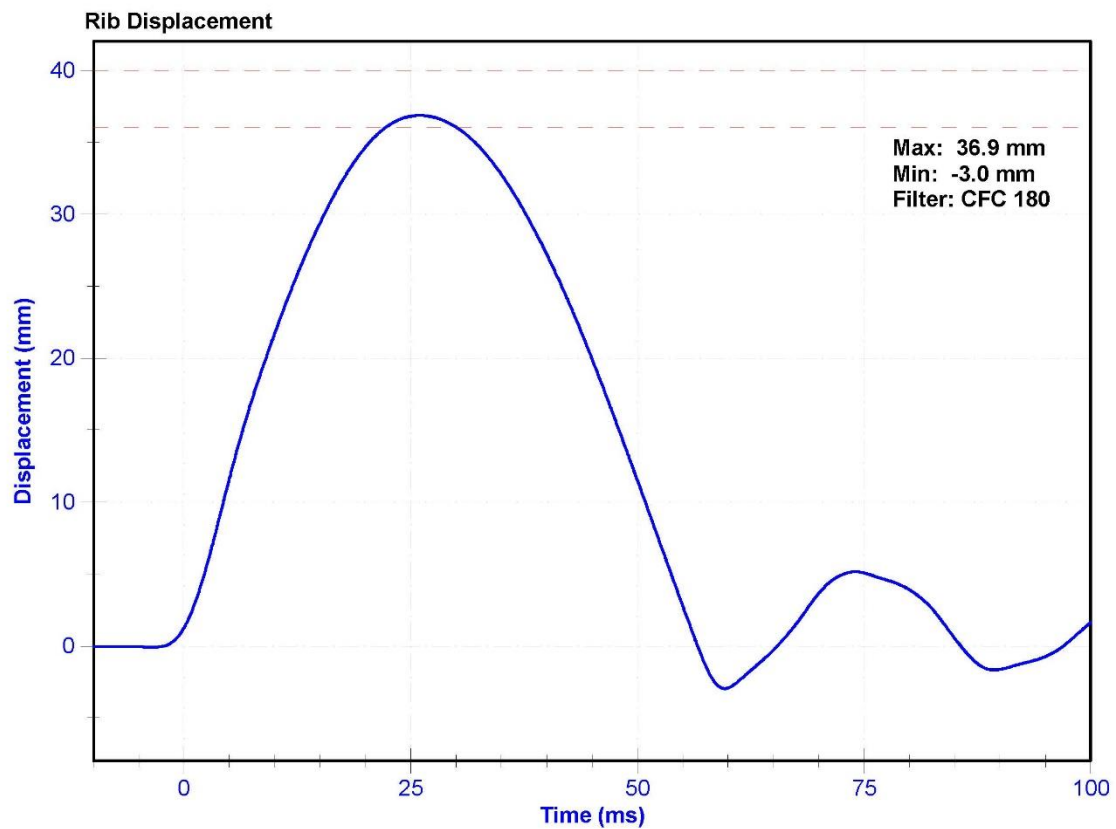


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.6	Pass
Humidity	10	70	%	30.0	Pass
Rib Displacement	46	51	mm	47.4	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-184GFE	6/20/2016	6/20/2017

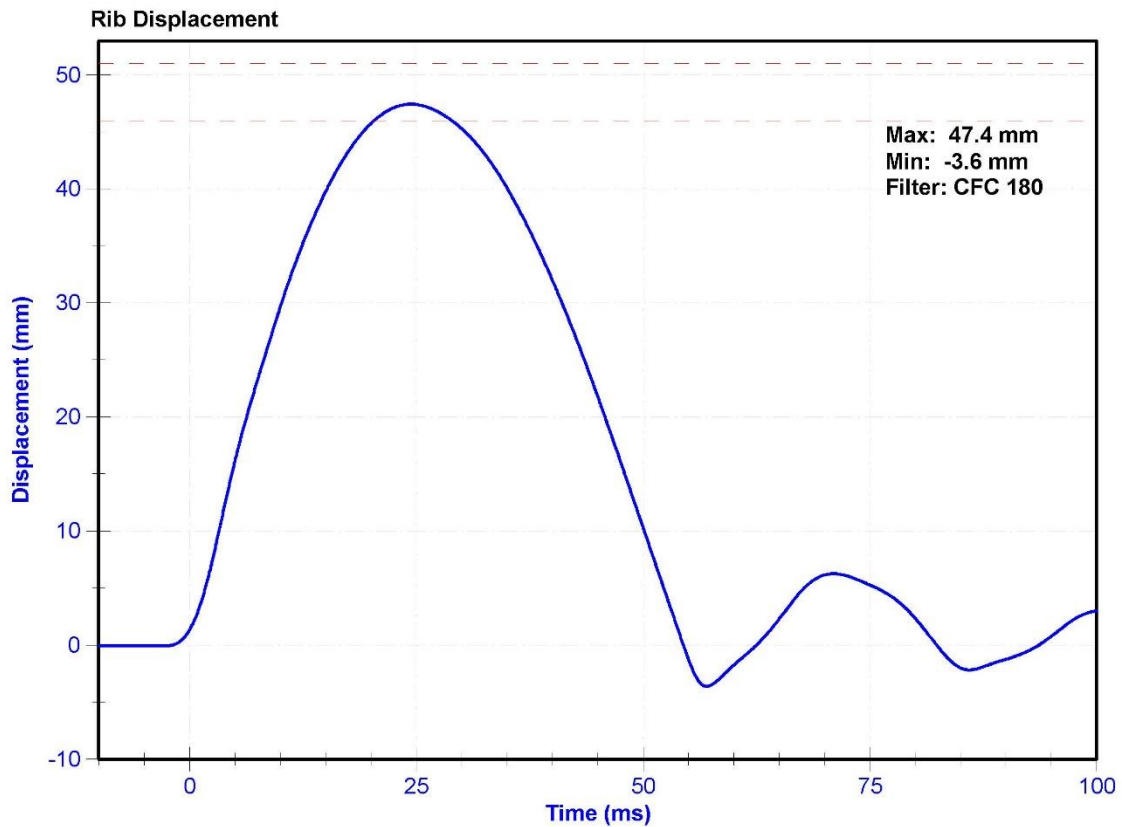


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.7	Pass
Humidity	10	70	%	28.7	Pass
Rib Displacement	36	40	mm	37.5	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-182GFE	6/20/2016	6/20/2017

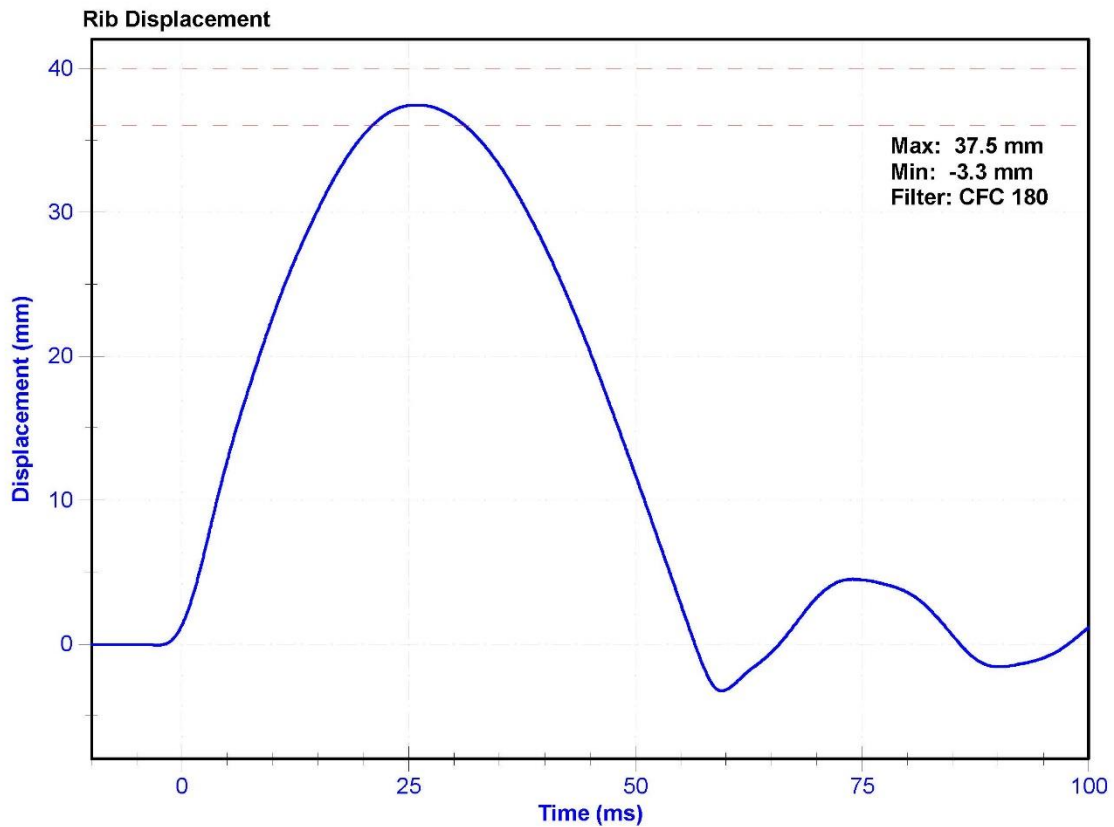


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.7	Pass
Humidity	10	70	%	28.7	Pass
Rib Displacement	46	51	mm	48.8	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-182GFE	6/20/2016	6/20/2017

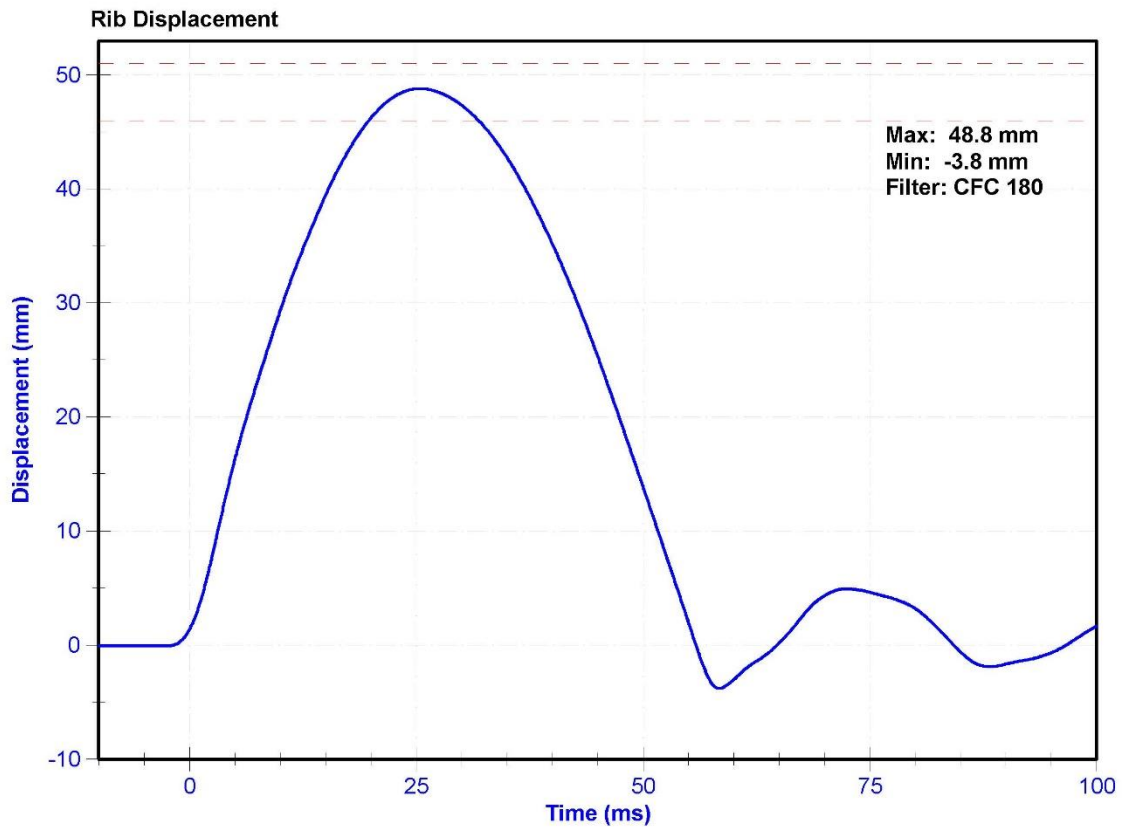


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle





**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.4	Pass
Humidity	10	70	%	32.4	Pass
Velocity	5.4	5.6	m/s	5.51	Pass
Resistive Force after 6ms	5100	6200	N	5770.3	Pass
Upper Thorax Rib Deflection	34	41	mm	35.7	Pass
Mid Thorax Rib Deflection	37	45	mm	40.0	Pass
Lower Thorax Rib Deflection	37	44	mm	40.4	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	ENDEVCO 7264CT	AC-P21393	5/27/2016	11/25/2016
Upper Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-183GFE	6/20/2016	6/20/2017
Middle Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-184GFE	6/20/2016	6/20/2017
Lower Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-182GFE	6/20/2016	6/20/2017

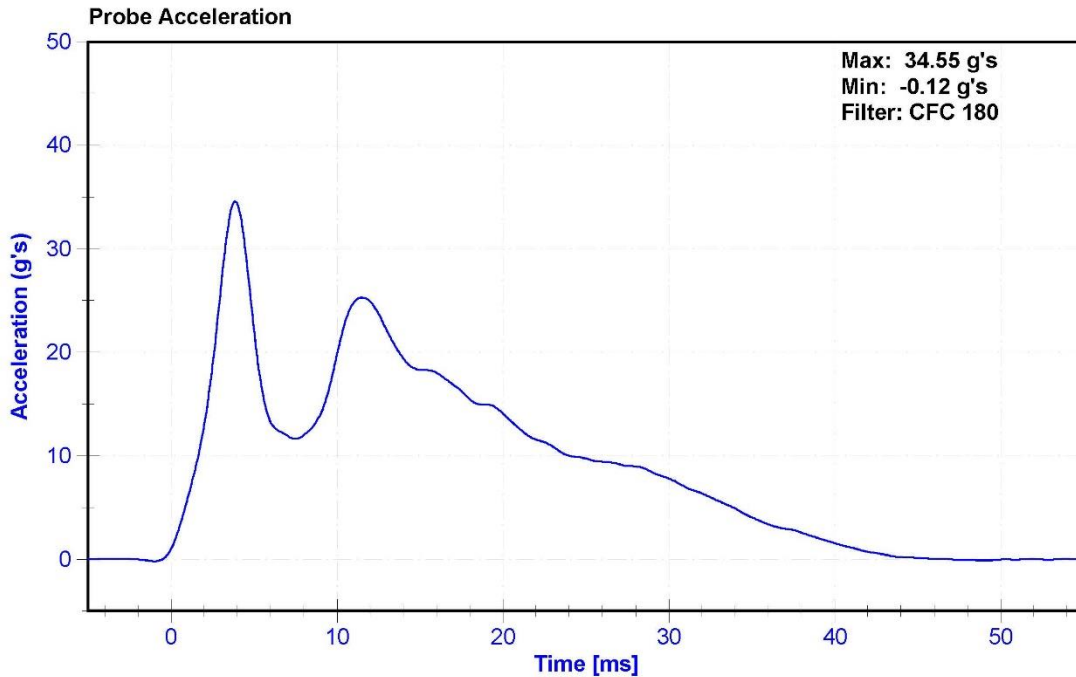

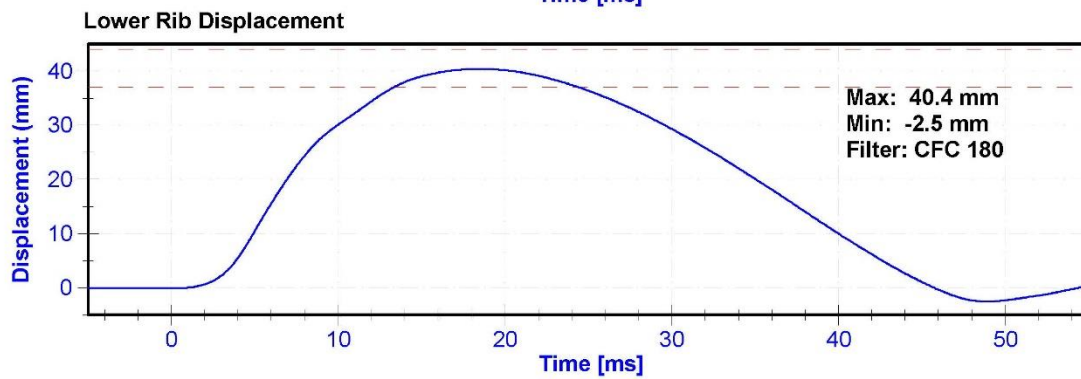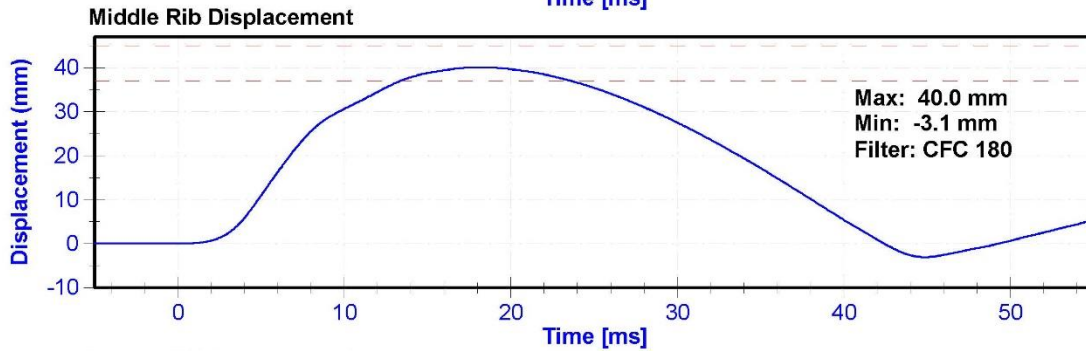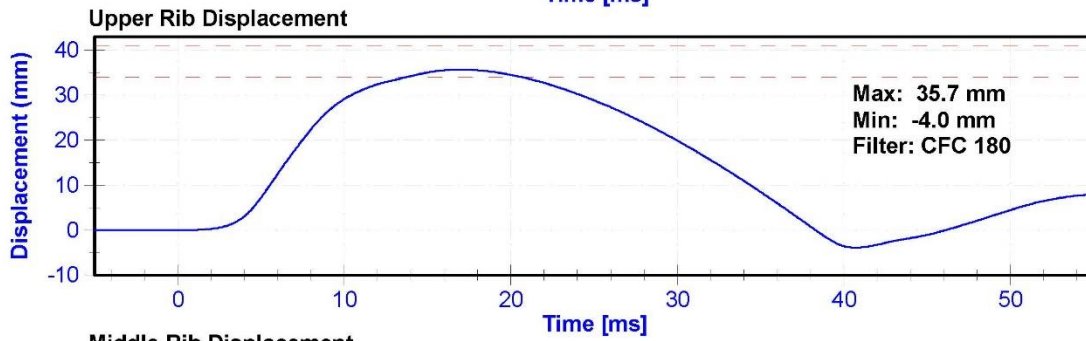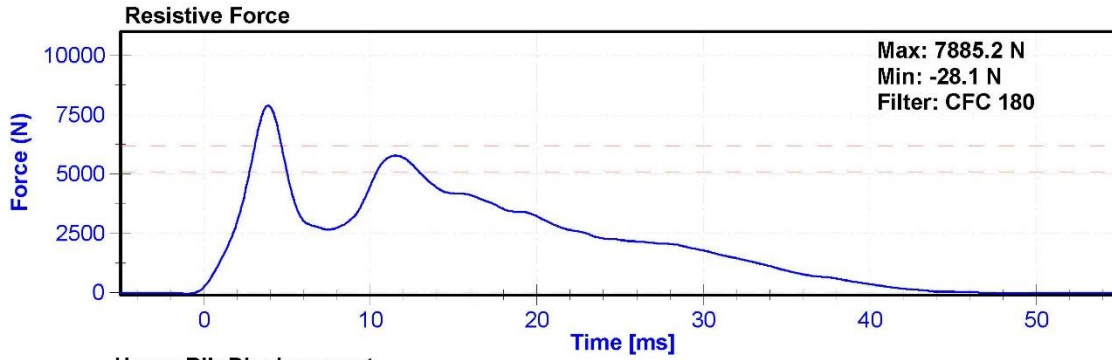


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

**Results**


Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.5	Pass
Humidity	10	70	%	31.5	Pass
Velocity	3.9	4.1	m/s	4.02	Pass
Combined Abdomen Force	2200	2700	N	2516.8	Pass
Time at Peak Abdomen Force	10.0	12.3	ms	10.95	Pass
Resistive Probe Force	4000	4800	N	4527.7	Pass
Time at Peak Resistive Force	10.6	13.0	ms	11.35	Pass

**Transducer Calibrations**


Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P21393	5/27/2016	11/25/2016
Front Abdomen Load Cell	DENTON 2631	LC-1512	5/24/2016	5/24/2017
Middle Abdomen Load Cell	DENTON 2631	LC-1526	5/24/2016	5/24/2017
Rear Abdomen Load Cell	DENTON 2631	LC-1516	5/24/2016	5/24/2017

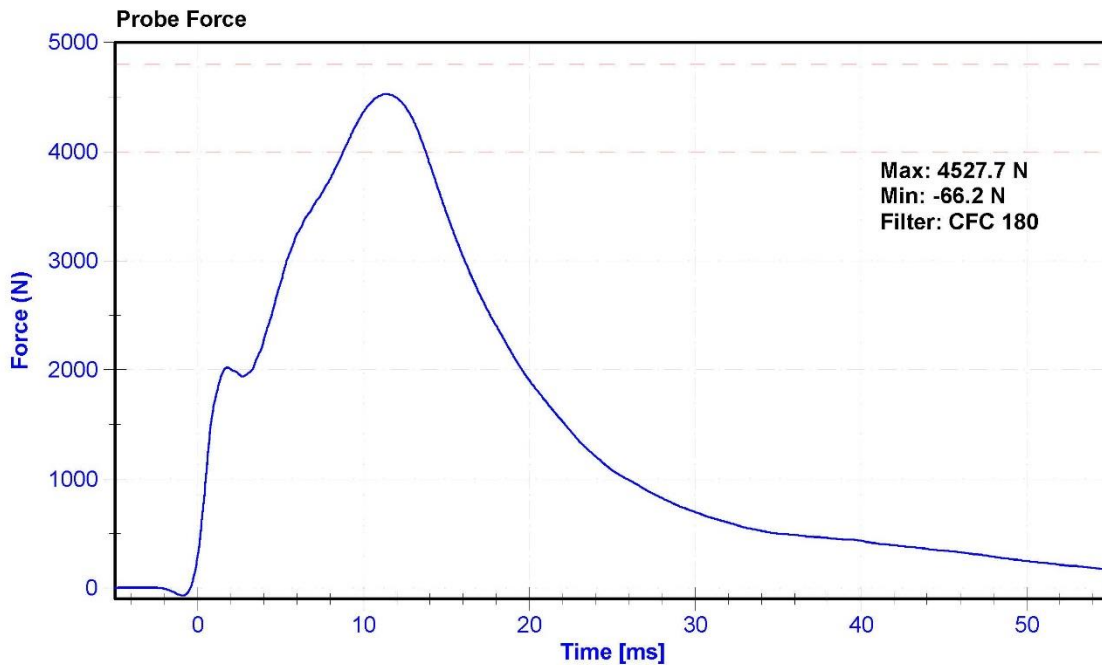


**Combined Abdomen Force**

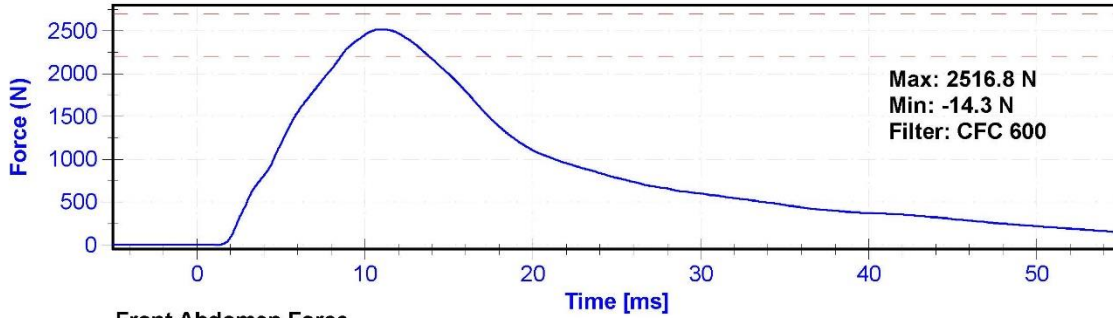


**Front Abdomen Force**

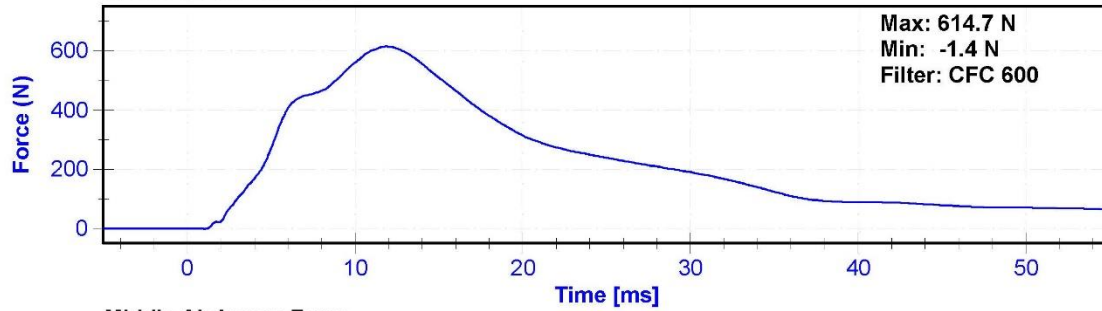

**Middle Abdomen Force**

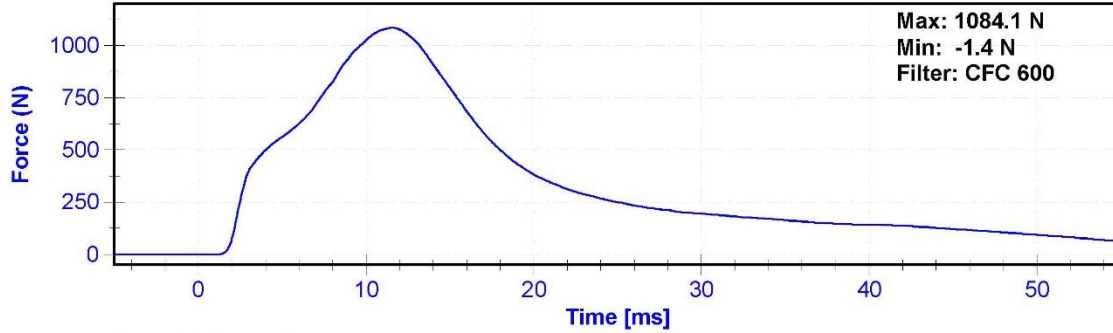

**Rear Abdomen Force**

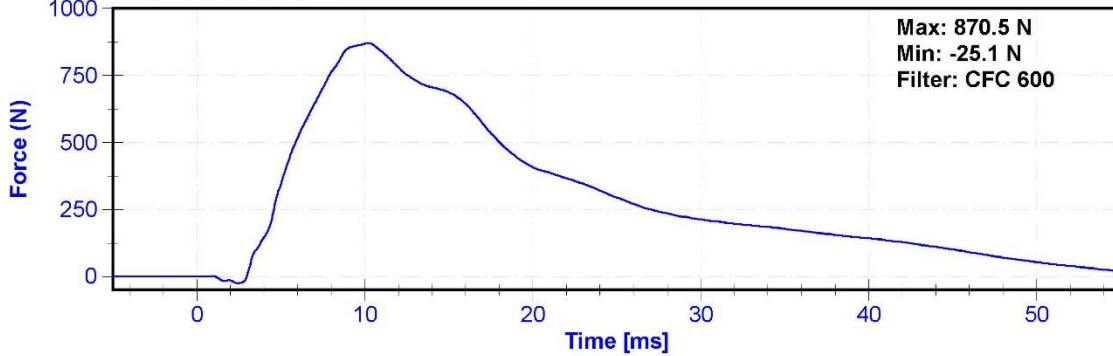

ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

**Results**



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.0	Pass
Humidity	10	70	%	29.2	Pass
Velocity	5.95	6.15	m/s	6.113	Pass
Lateral Spine Rotation	45	55	deg	48.5	Pass
Time at Maximum Rotation	39	53	ms	44.4	Pass
Time of Decay to Zero Degrees	37	57	ms	37.4	Pass
Pulse within Corridor?	-	-	-		

**Transducer Calibrations**



Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5F3	5/10/2016	5/10/2017
Pendulum "A" Potentiometer	SP22G	DS-094	10/11/2016	10/11/2017
Condyle "B" Potentiometer	SP22G	DS-095	10/11/2016	10/11/2017

**Lumbar Spine Broke During Certification Test**

**Lumbar Spine Broke During Certification Test**

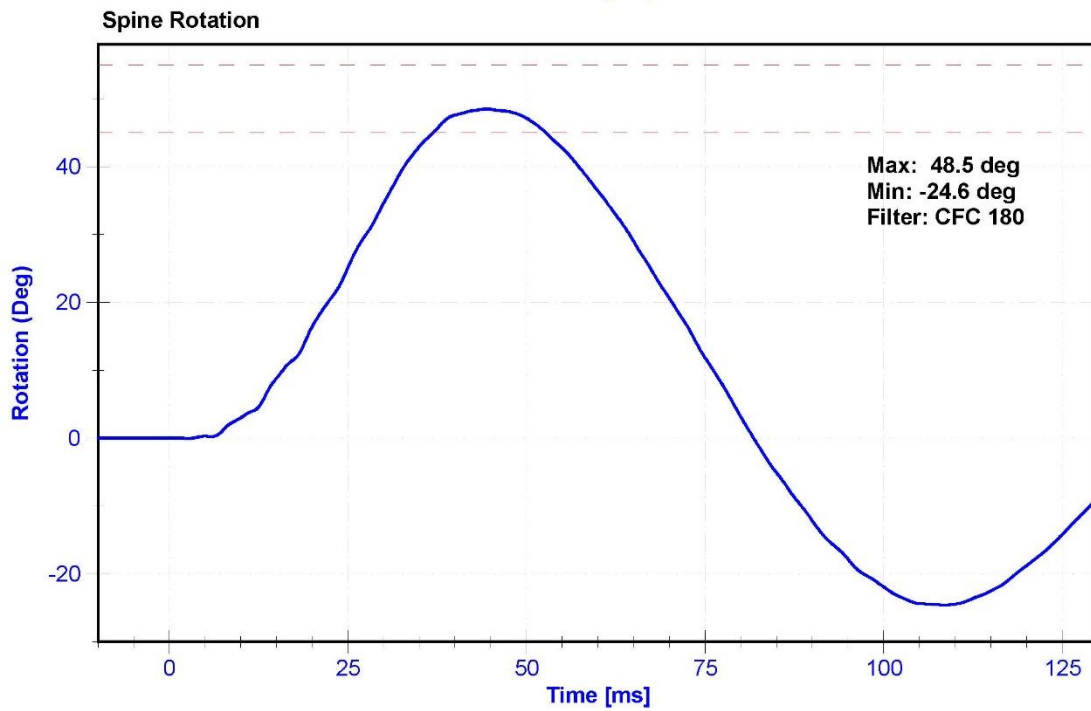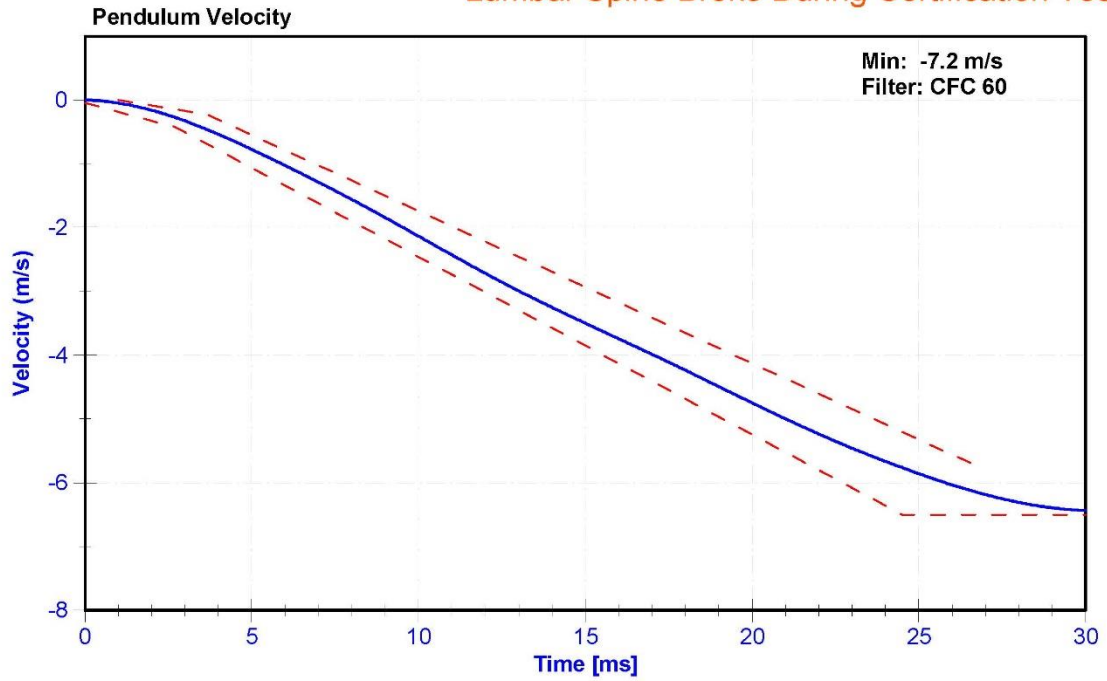

Lumbar Spine Broke During Certification Test

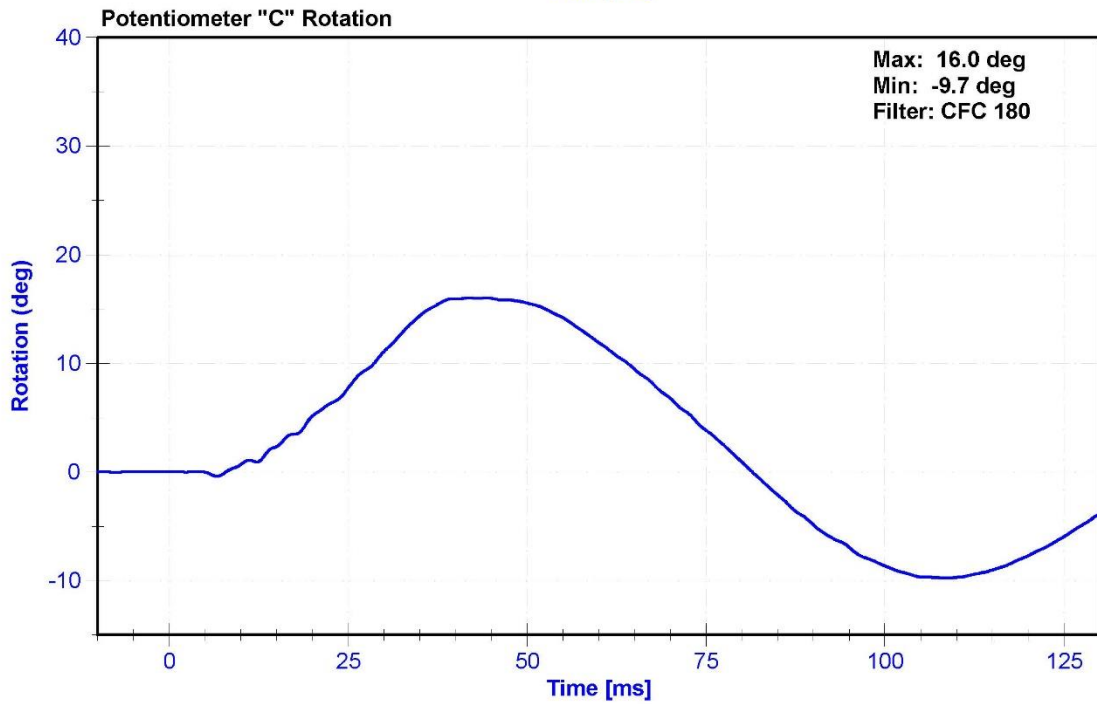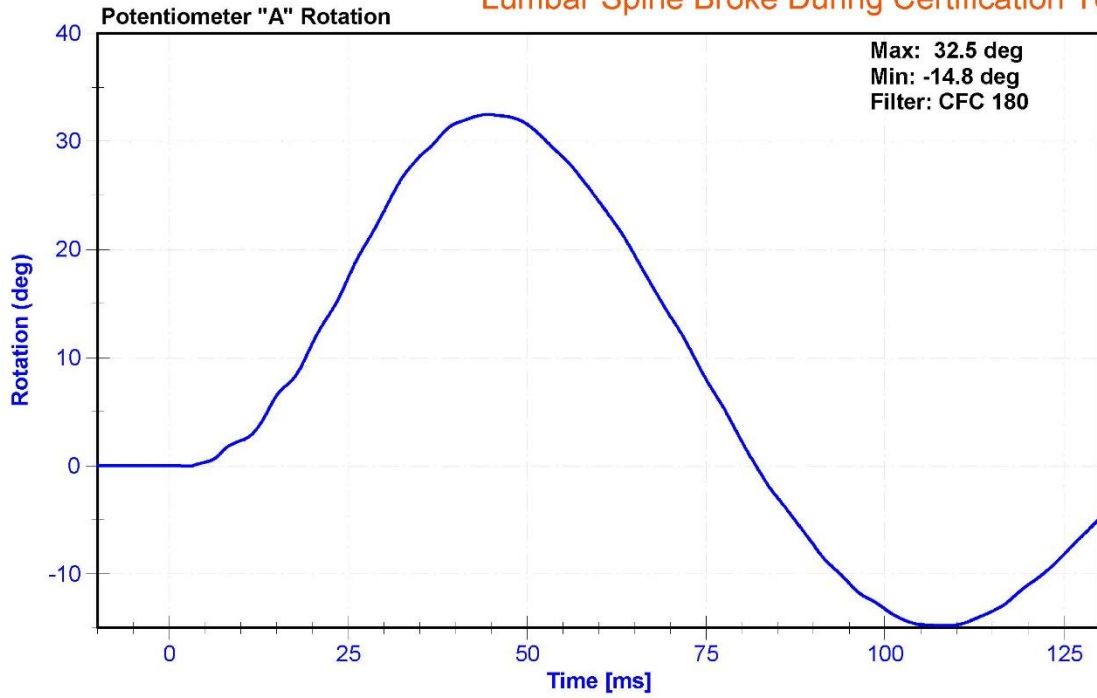

ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

**Results**



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	29.2	Pass
Velocity	5.95	6.15	m/s	6.113	Pass
Lateral Spine Rotation	45	55	deg	45.8	Pass
Time at Maximum Rotation	39	53	ms	42.8	Pass
Time of Decay to Zero Degrees	37	57	ms	38.3	Pass
Pulse within Corridor?	-	-	-		

**Transducer Calibrations**



Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5F3	5/10/2016	5/10/2017
Pendulum "A" Potentiometer	SP22G	DS-094	10/11/2016	10/11/2017
Condyle "B" Potentiometer	SP22G	DS-095	10/11/2016	10/11/2017

Replacement Spine Installed

Replacement Spine Installed

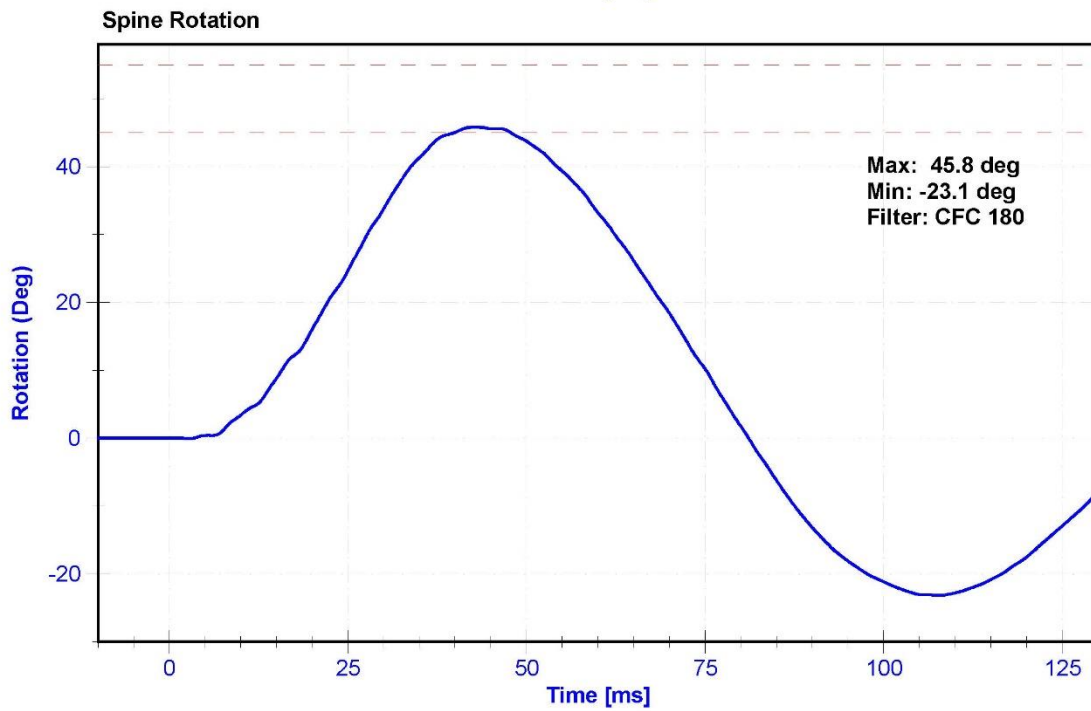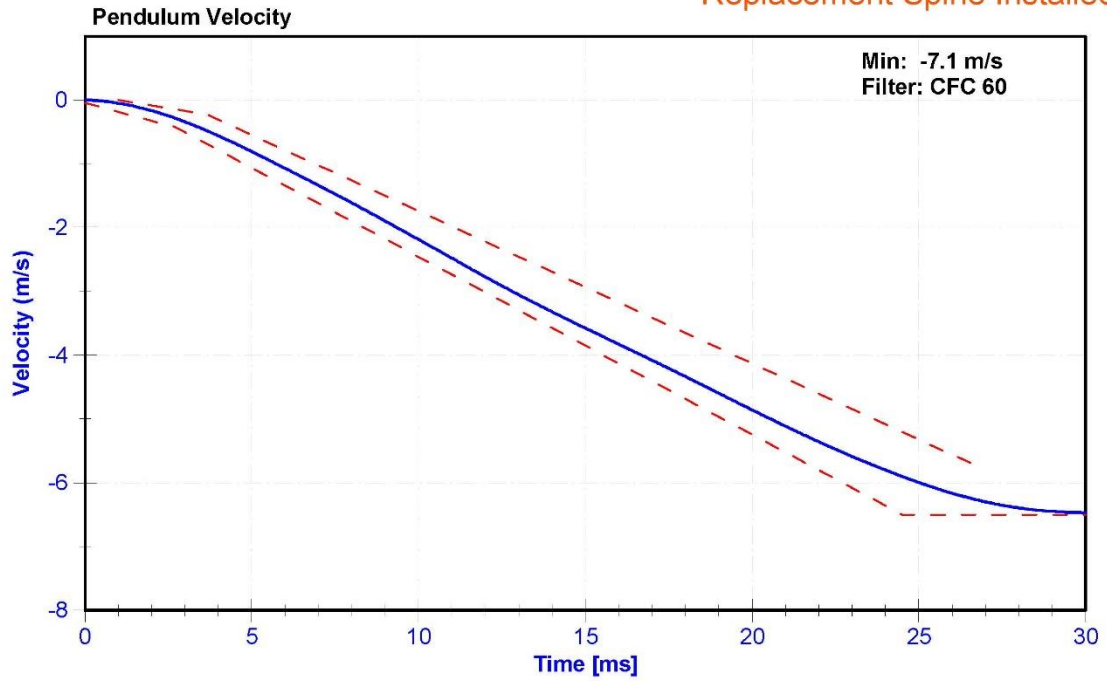

Replacement Spine Installed

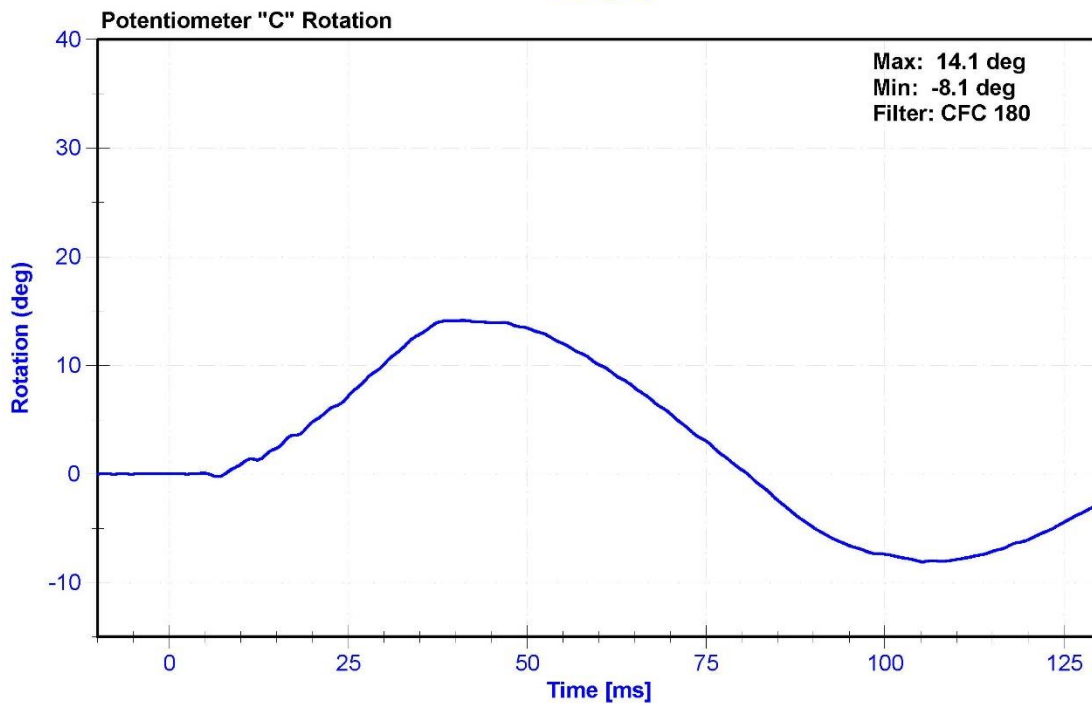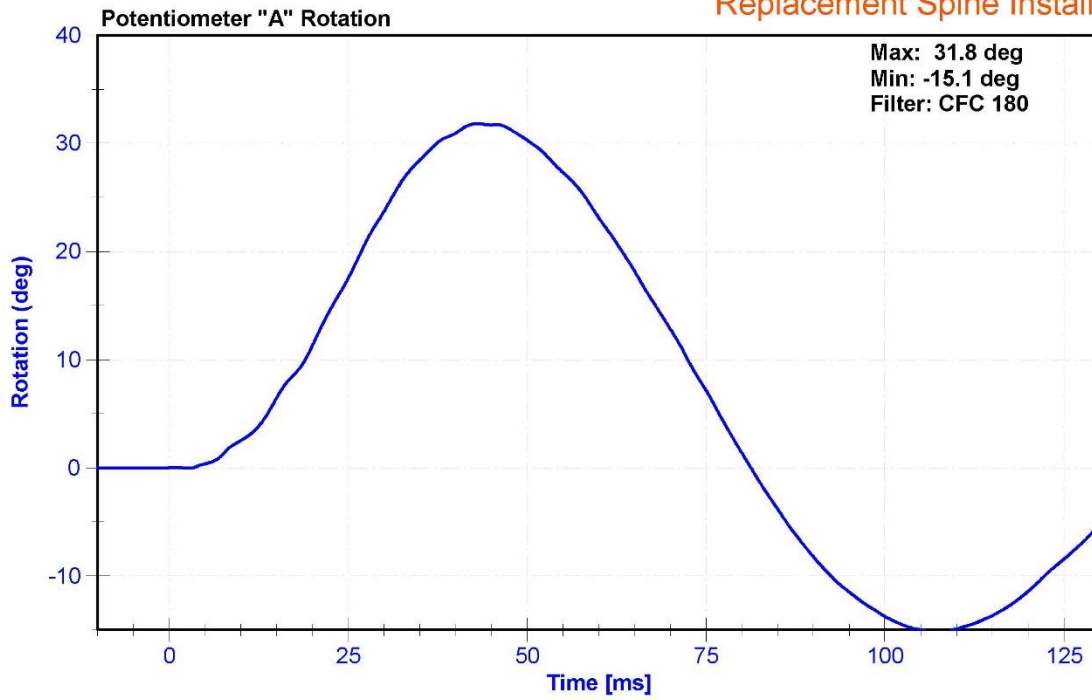


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.5	Pass
Humidity	10	70	%	31.1	Pass
Velocity	4.2	4.4	m/s	4.32	Pass
Resistive Force	4700	5400	N	4976.4	Pass
Time at Peak Resistive Force	11.8	16.1	ms	12.50	Pass
Pubic Force	-1590	-1230	N	-1359.7	Pass
Time at Peak Pubic Force	12.2	17.0	ms	13.30	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P21393	5/27/2016	11/25/2016
Pubic Load Cell	Denton 3096JFL	LC-465Fy	5/24/2016	5/24/2017

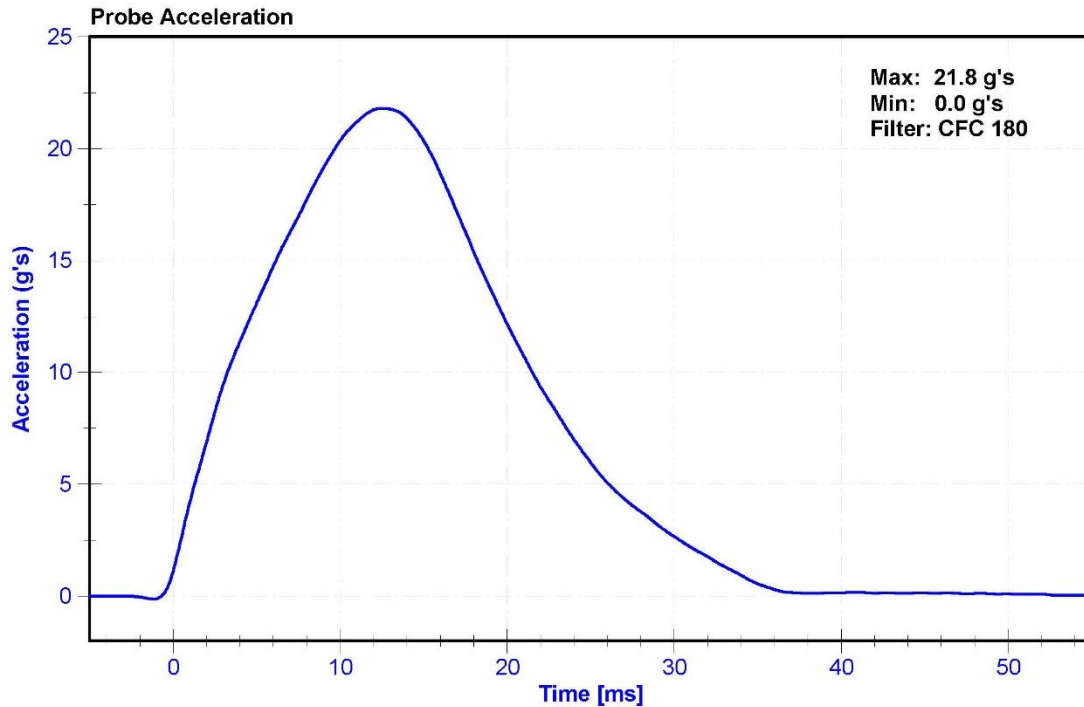

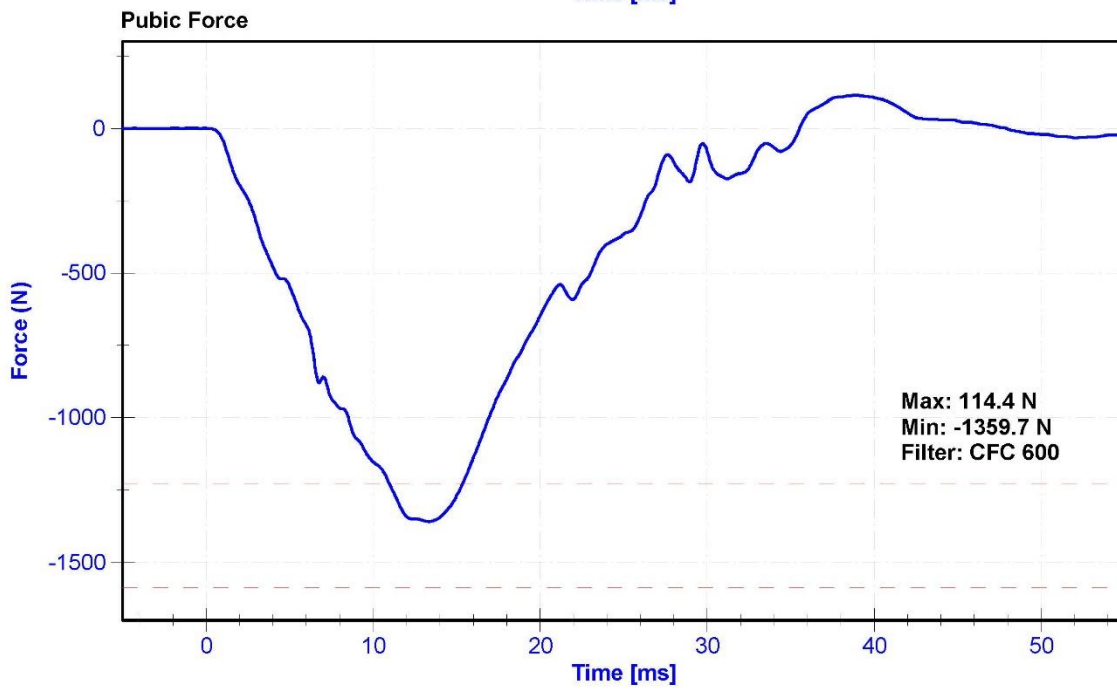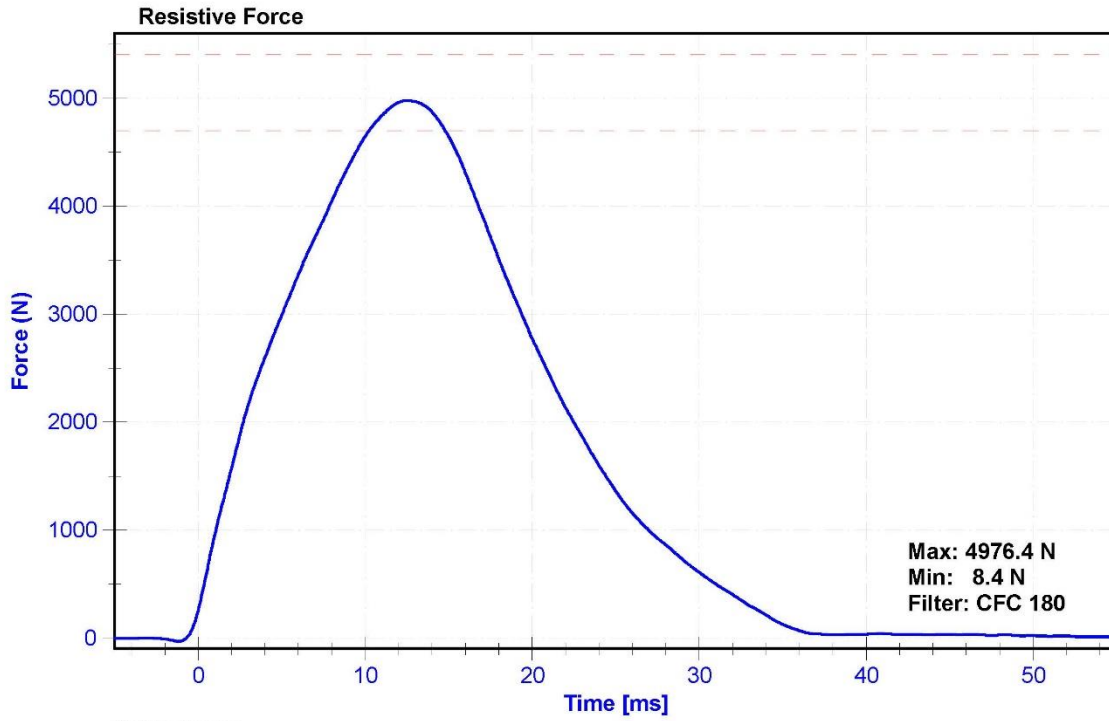

**CALIBRATION TEST RESULTS**

**POST-TEST**

**SID-IIS 5<sup>TH</sup> PERCENTILE FEMALE - PASSENGER ATD**

**SERIAL No: 300**




External Measurements - SID-IIs

Technician: MKG

Date: 11/14/2016

Dummy Serial Number: DG8012

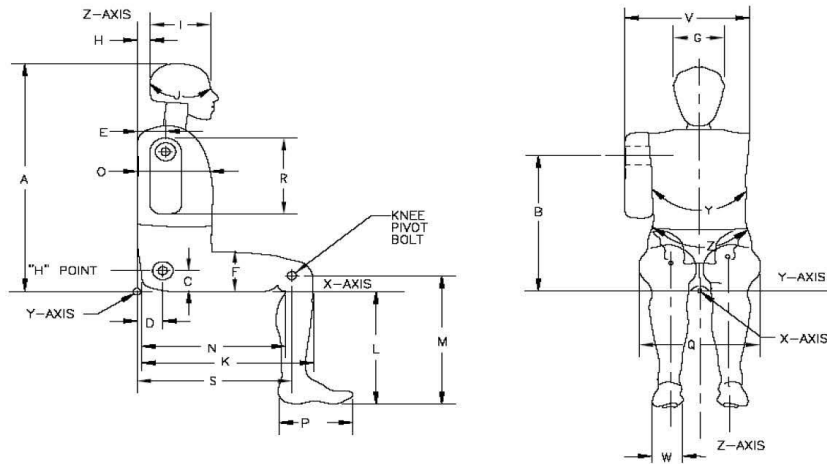

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	772	788	781	Pass
B	Shoulder Pivot Height	437	453	445	Pass
C	H-point Height	79	89	86	Pass
D	H-point from seatback	141	151	146	Pass
E	Shoulder Pivot from Backline	97	107	102	Pass
F	Thigh Clearance	119	135	129	Pass
G	Head Breadth	140	148	144	Pass
H	Head Back from Backline	40	46	43	Pass
I	Head Depth	178	188	182	Pass
J	Head Circumference	541	551	546	Pass
K	Buttock to Knee Length	514	540	530	Pass
L	Popliteal Height	343	369	351	Pass
M	Knee Pivot to floor height	392	409	400	Pass
N	Buttock Popliteal Length	416	442	430	Pass
O	Chest Depth w/o jacket	195	211	203	Pass
P	Foot Length	216	232	220	Pass
Q	Hip Breadth (w/pelvic plugs)	313	323	319	Pass
R	Arm Length	249	259	254	Pass
S	Knee Joint to seatback	477	493	485	Pass
V	Shoulder Width	341	357	348	Pass
W	Foot Width	78	94	86	Pass
Y	Chest Circumference w/jacket	851	881	861	Pass
Z	Waist Circumference	761	791	771	Pass


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	DG8012	Laboratory Supervisor	M. Goehle




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	31.7	Pass
Resultant Acceleration	115	137	g's	117.9	Pass
Oscillation	0	15	%	6.7	Pass
Fore-Aft Acceleration	-15	15	g's	-6.4	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P51685	9/30/2016	3/31/2017
Y Accelerometer	ENDEVCO 7264CT	AC-P51682	9/30/2016	3/31/2017
Z Accelerometer	ENDEVCO 7264CT	AC-P51699	9/30/2016	3/31/2017

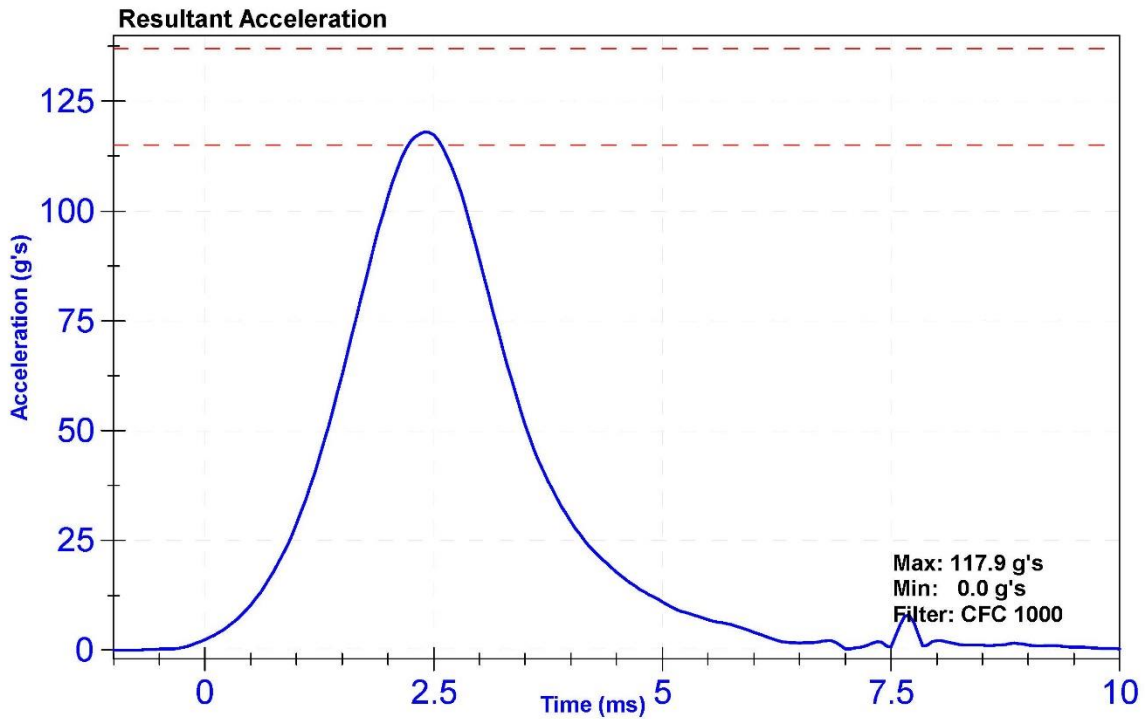

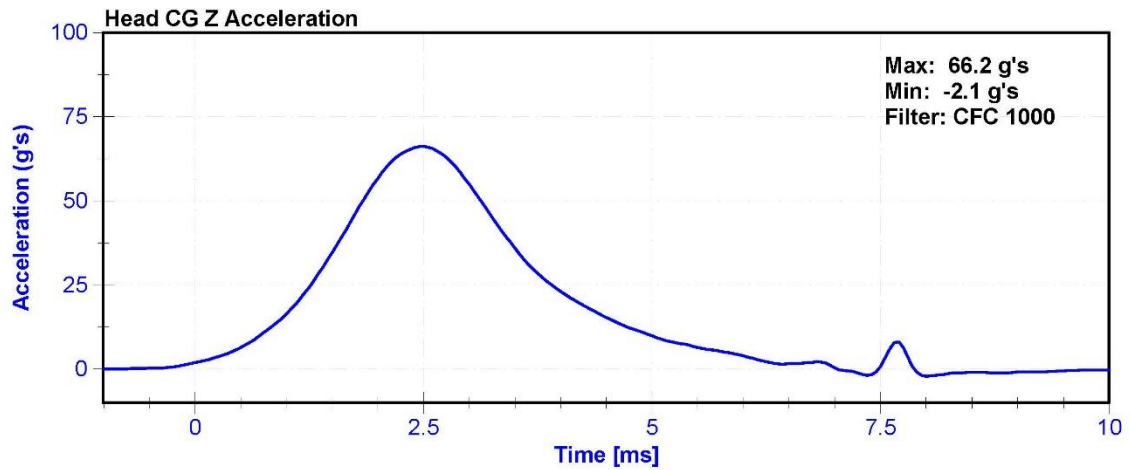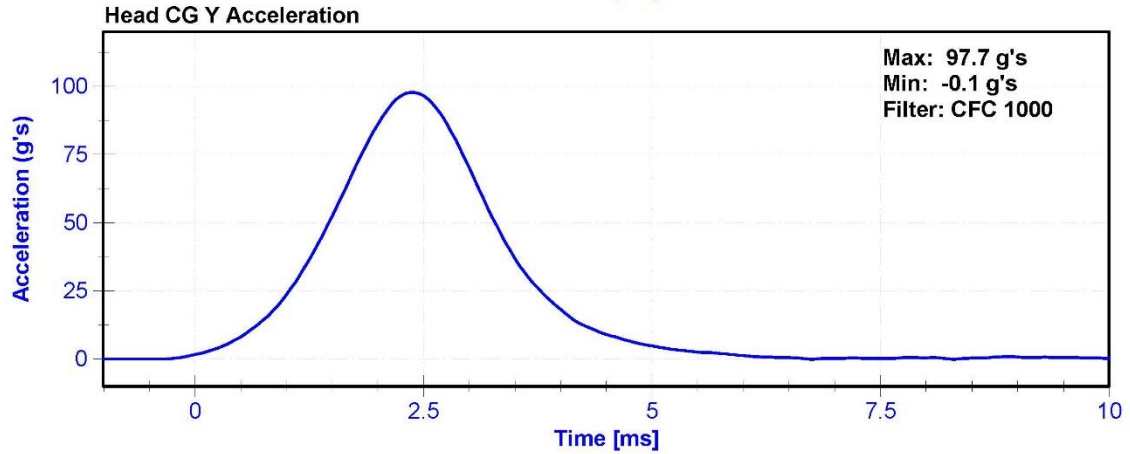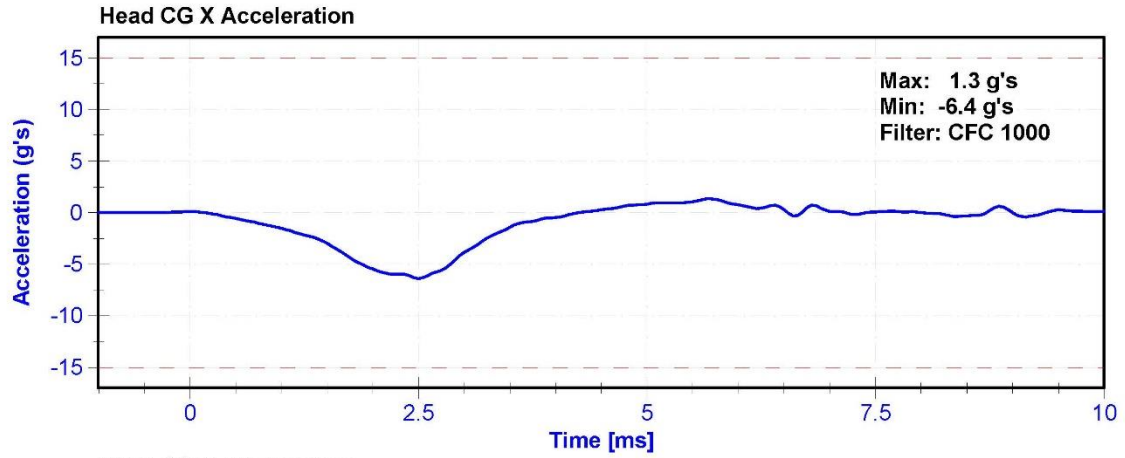


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	DG8012	Laboratory Supervisor	M. Goehle

**Results**


Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	31.8	Pass
Velocity	5.51	5.63	m/s	5.620	Pass
Pendulum Impulse at 10ms	2.2	2.8	m/s	2.33	Pass
Pendulum Impulse at 15ms	3.3	4.1	m/s	3.51	Pass
Pendulum Impulse at 20ms	4.4	5.4	m/s	4.78	Pass
Pendulum Impulse at 25ms	5.4	6.1	m/s	5.73	Pass
Pendulum Impulse from 25 to 100ms	5.5	6.2	m/s	5.91	Pass
Neck Rotation	71	81	deg	76.3	Pass
Time at Maximum Rotation	50	70	ms	60.3	Pass
Moment about the OC	36	44	Nm	41.1	Pass
Moment Decay to 0 Nm	102	126	ms	113.4	Pass

**Transducer Calibrations**


Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5F3	5/10/2016	5/10/2017
Pendulum Potentiometer	Denton 78051-342	DS-184Pend	10/12/2016	10/12/2017
Condyle Potentiometer	Denton 78051-342	DS-185Pend	10/12/2016	10/12/2017
Upper Neck Load Cell	Denton 1716A	LC-440Fy	5/24/2016	5/24/2017

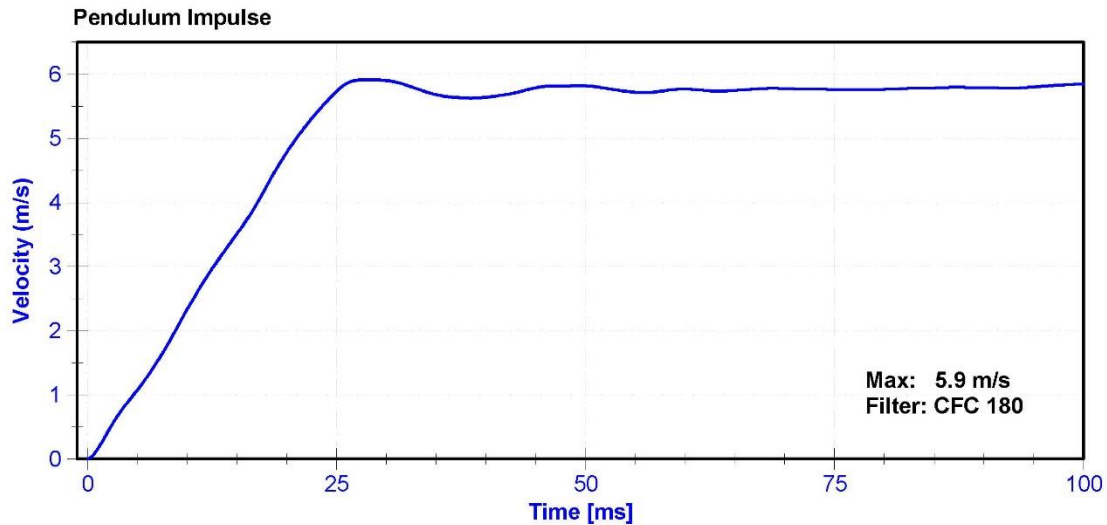

Neck Rotation

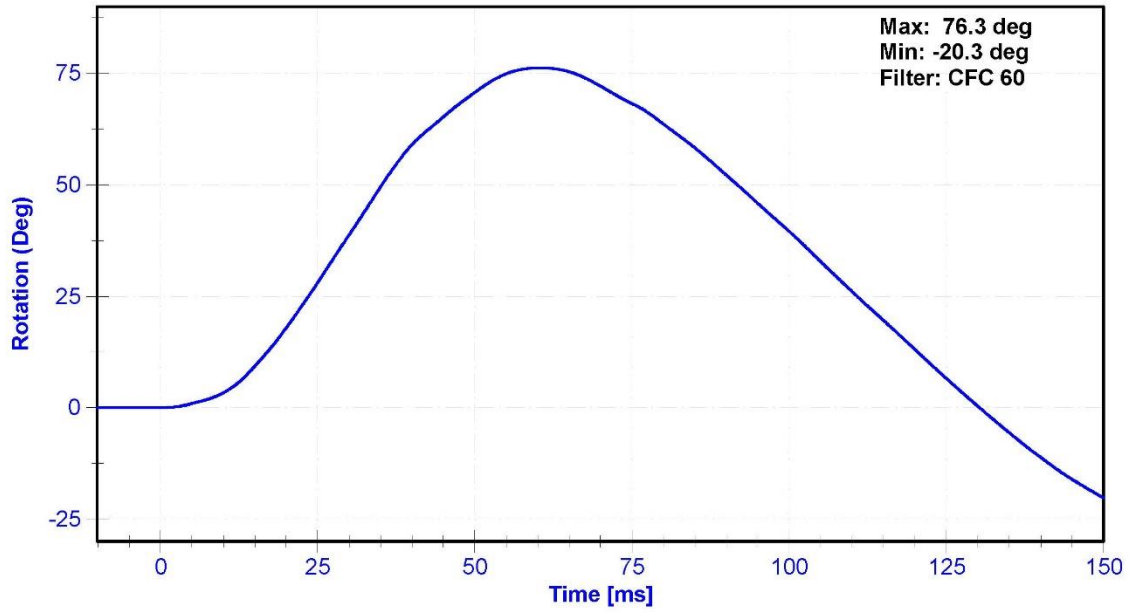

Moment About Occipital Condyle

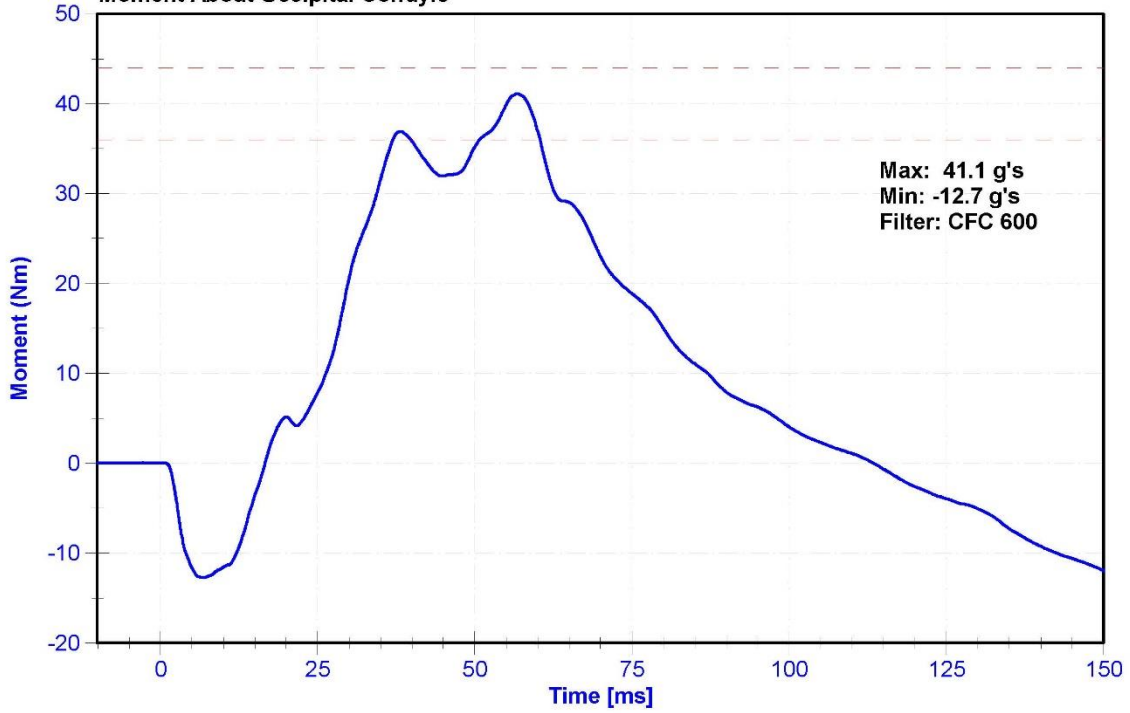


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	DG8012	Laboratory Supervisor	M. Goehle



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	34	Pass
Velocity	4.2	4.4	m/s	4.28	Pass
Probe Acceleration	13	18	g's	15.3	Pass
Shoulder Deflection	28	37	mm	29.1	Pass
Lateral Upper Spine Acceleration	17	22	g's	20.1	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P21393	5/27/2016	11/25/2016
Shoulder Potentiometer	Servo 08TC1-3745	DS-1845GFE	6/15/2016	6/15/2017
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P51875	10/4/2016	4/4/2017

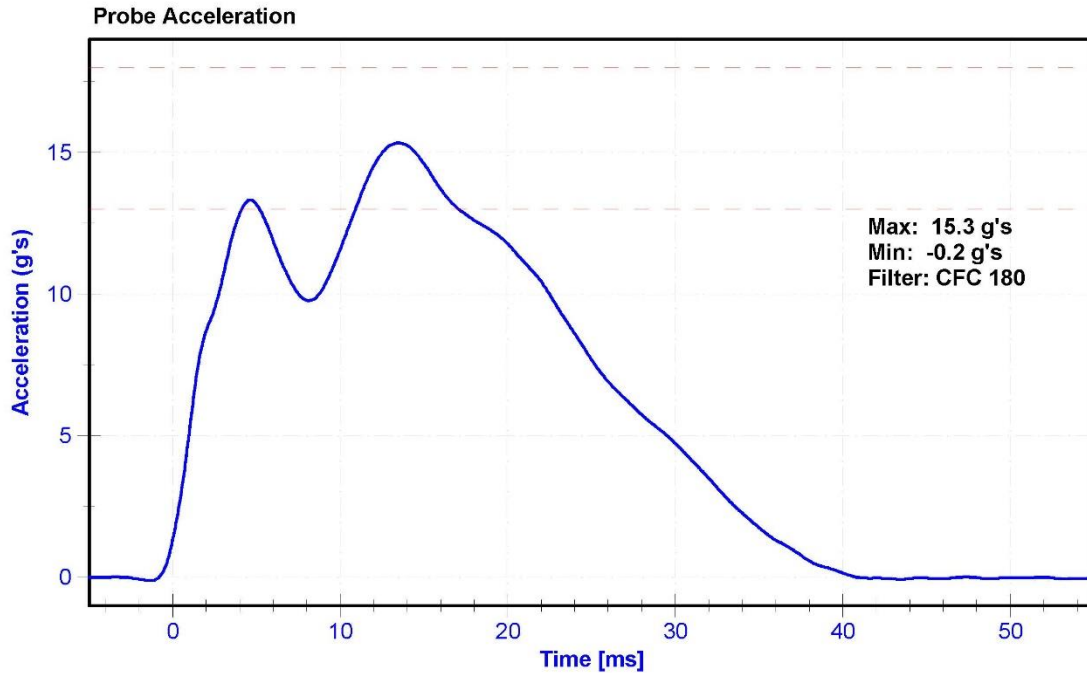

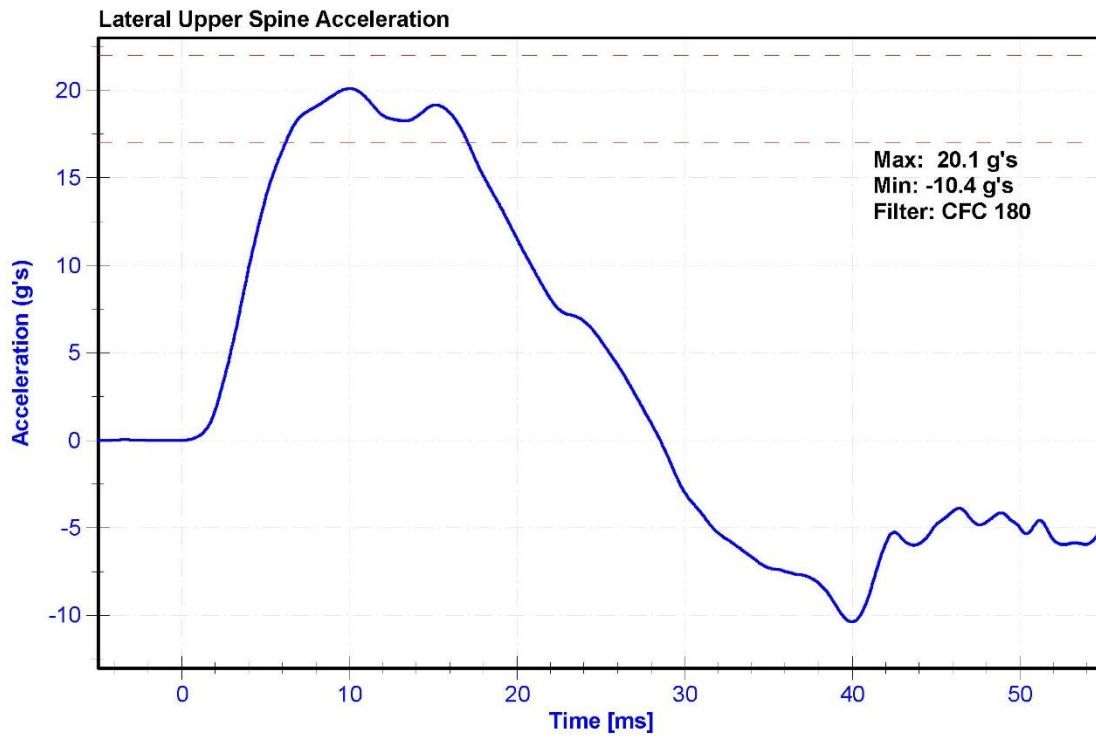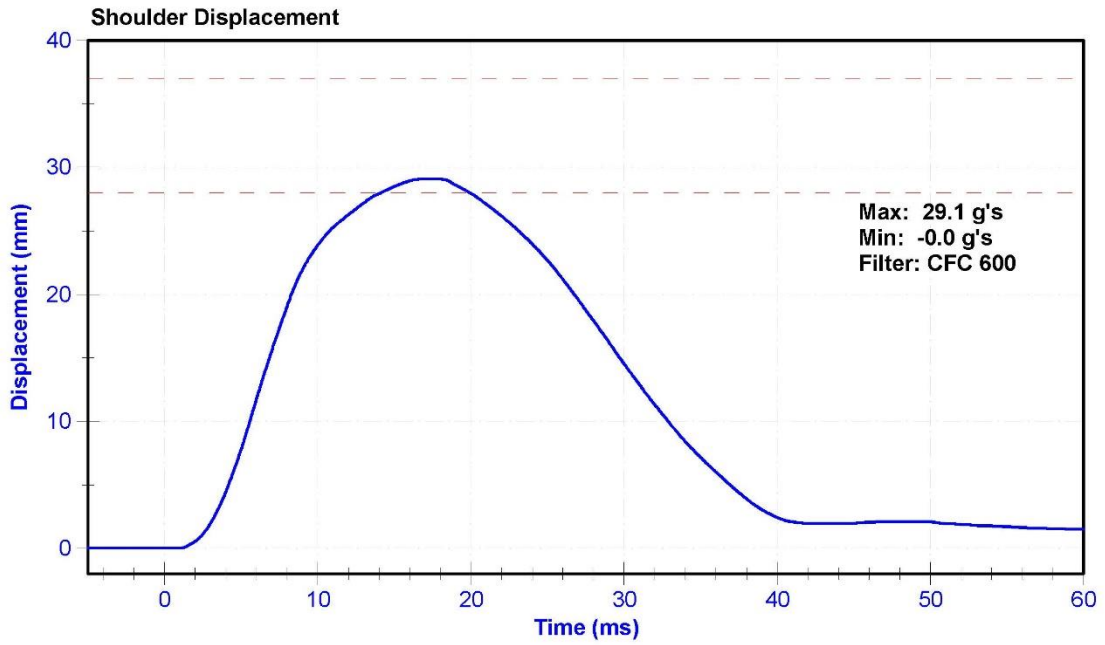


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	DG8012	Laboratory Supervisor	M. Goehle


**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	34.4	Pass
Velocity	6.6	6.8	m/s	6.68	Pass
Probe Acceleration after 5 ms	30	36	g's	32.1	Pass
Lateral Upper Spine Acceleration	34	43	g's	38.3	Pass
Lateral Lower Spine Acceleration	29	37	g's	33.0	Pass
Shoulder Deflection	31	40	mm	32.3	Pass
Upper Thorax Rib Deflection	25	32	mm	27.9	Pass
Mid Thorax Rib Deflection	30	36	mm	32.6	Pass
Lower Thorax Rib Deflection	32	38	mm	34.3	Pass


**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P21393	5/27/2016	11/25/2016
Upper Spine T1 Y Accelerometer	ENDEVCO 7264CT	AC-P51875	10/4/2016	4/4/2017
Upper Spine T12 Y Accelerometer	ENDEVCO 7264	AC-P83319	10/4/2016	4/4/2017
Shoulder Potentiometer	Servo 08TC1-3745	DS-1845GFE	6/15/2016	6/15/2017
Upper Thorax Rib Potentiometer	Servo 08TC1-3621	DS-808GFE	6/15/2016	6/15/2017
Middle Thorax Rib Potentiometer	Servo 08TC1-3745	DS-1514GFE	6/15/2016	6/15/2017
Lower Thorax Rib Potentiometer	Servo 08TC1-3787	DS-011GFE	6/15/2016	6/15/2017

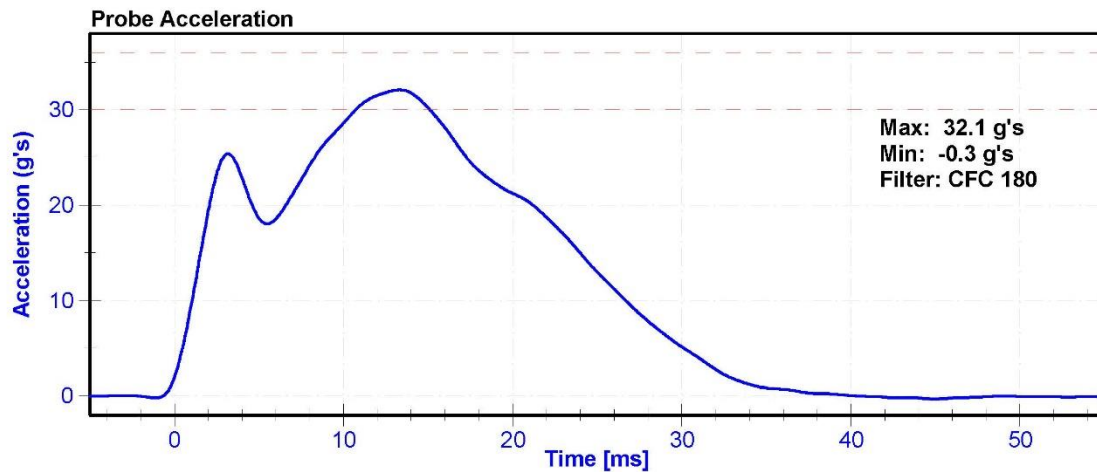


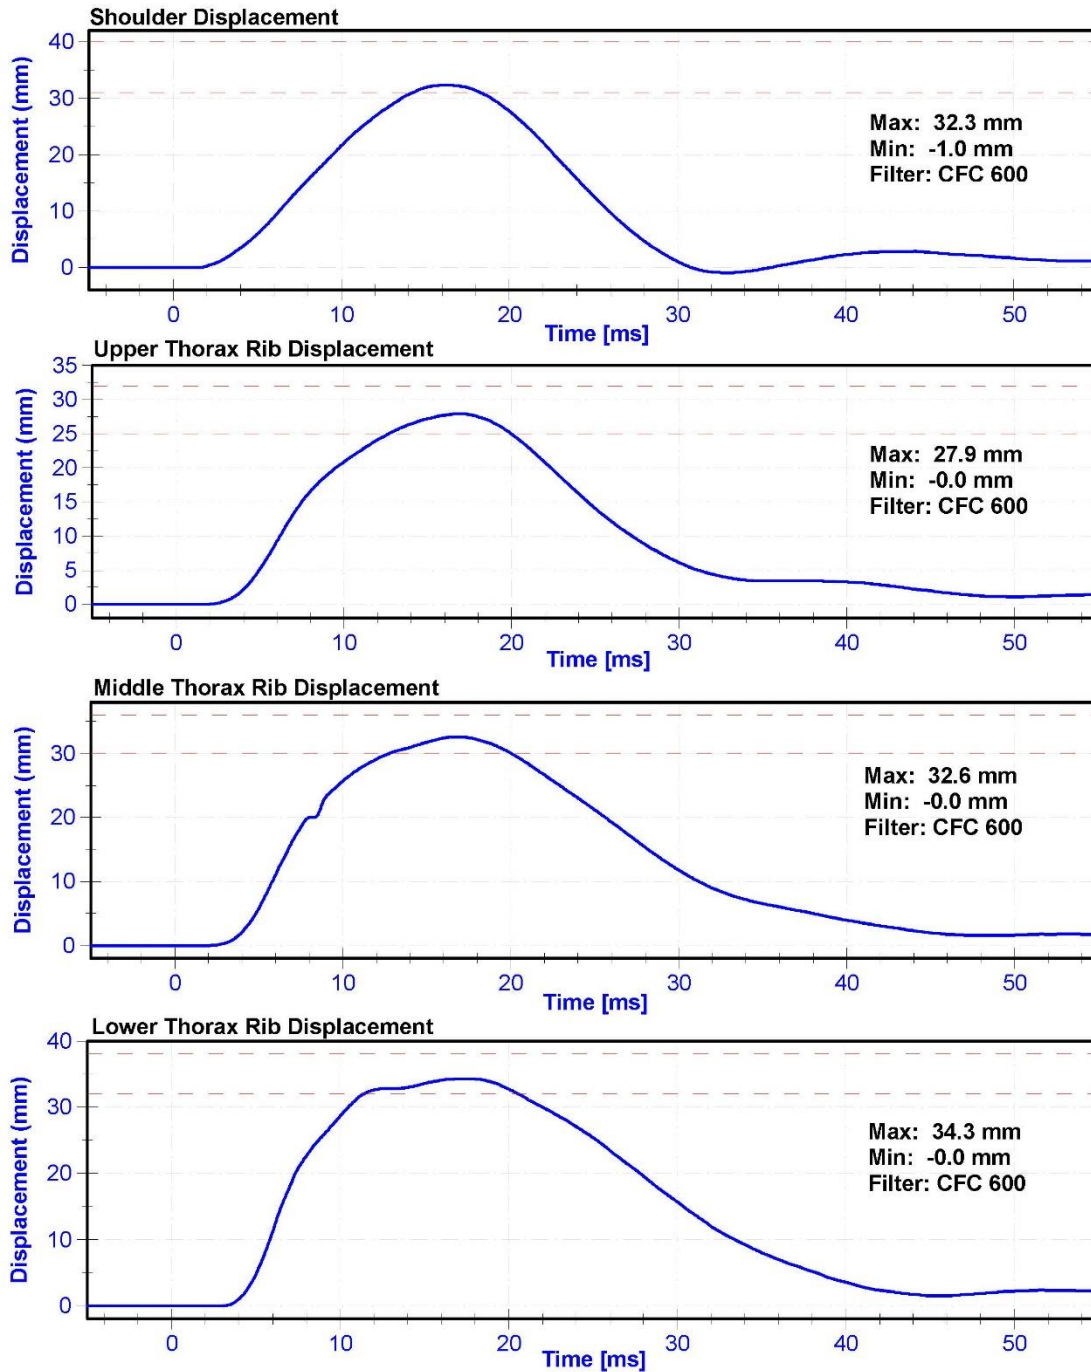

Lateral Upper Spine Acceleration

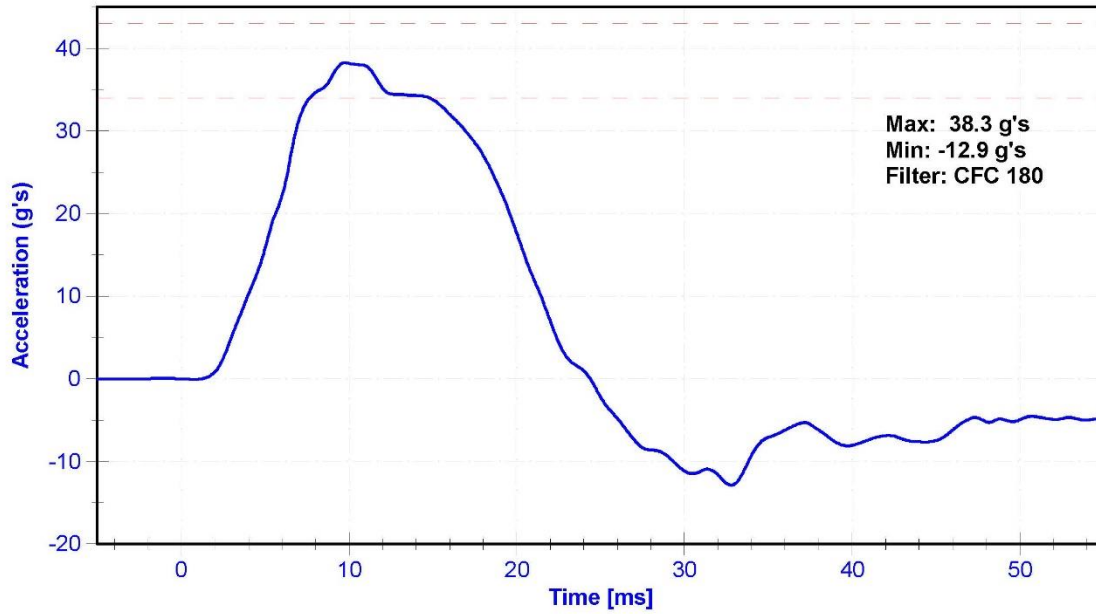

Lateral Lower Spine Acceleration

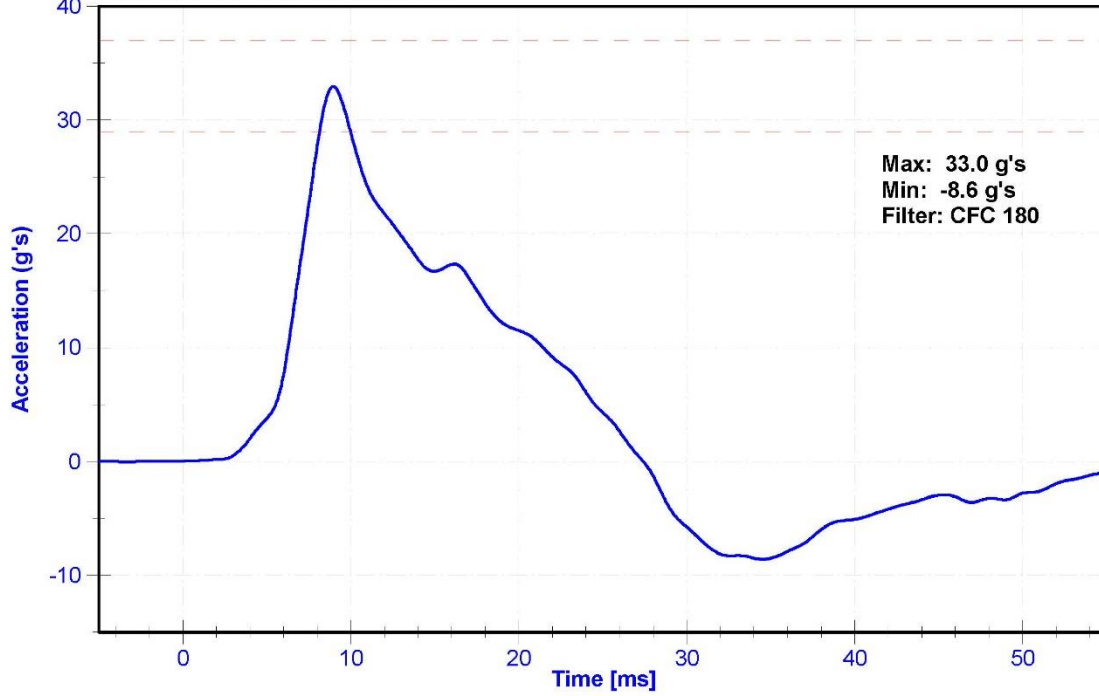


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	DG8012	Laboratory Supervisor	M. Goehle




**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	34.3	Pass
Velocity	4.2	4.4	m/s	4.30	Pass
Probe Acceleration	14	18	g's	15.8	Pass
Lateral Upper Spine Acceleration	13	17	g's	15.3	Pass
Lateral Lower Spine Acceleration	7	11	g's	9.5	Pass
Upper Thorax Rib Deflection	32	40	mm	37.4	Pass
Middle Thorax Rib Deflection	39	45	mm	42.0	Pass
Lower Thorax Rib Deflection	35	43	mm	37.2	Pass


**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P21393	5/27/2016	11/25/2016
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P51875	10/4/2016	4/4/2017
Lower Spine Y Accelerometer	ENDEVCO 7264	AC-P83319	10/4/2016	4/4/2017
Upper Thorax Rib Potentiometer	Servo 08TC1-3621	DS-808GFE	6/15/2016	6/15/2017
Middle Thorax Rib Potentiometer	Servo 08TC1-3745	DS-1514GFE	6/15/2016	6/15/2017
Lower Thorax Rib Potentiometer	Servo 08TC1-3787	DS-011GFE	6/15/2016	6/15/2017

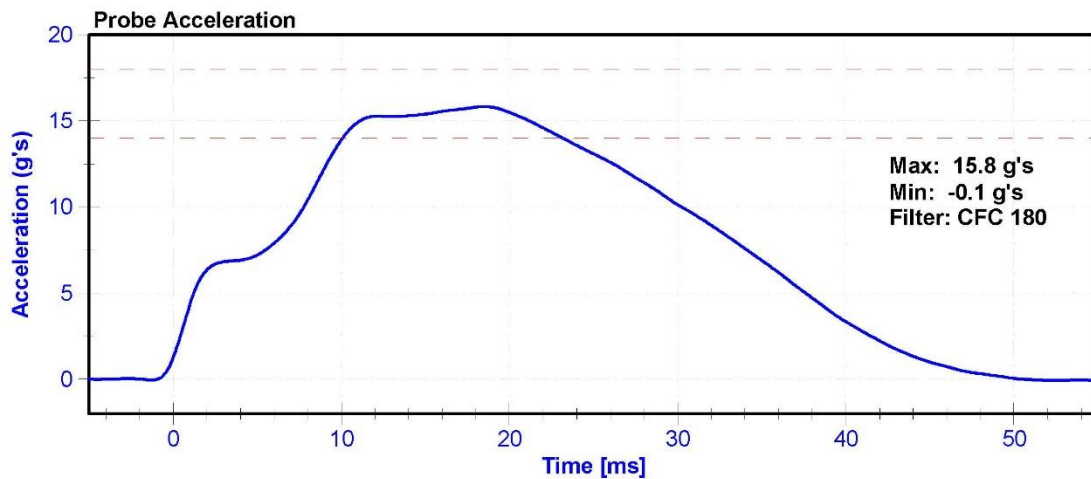


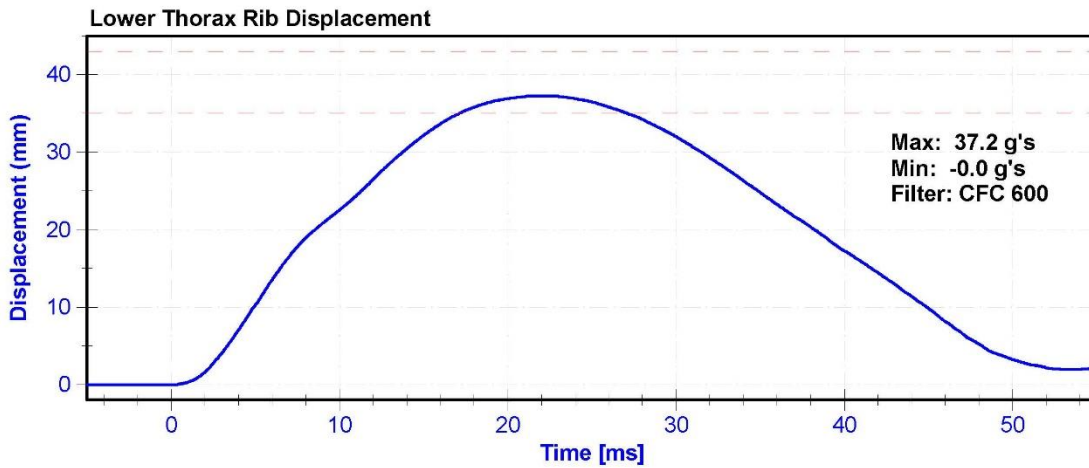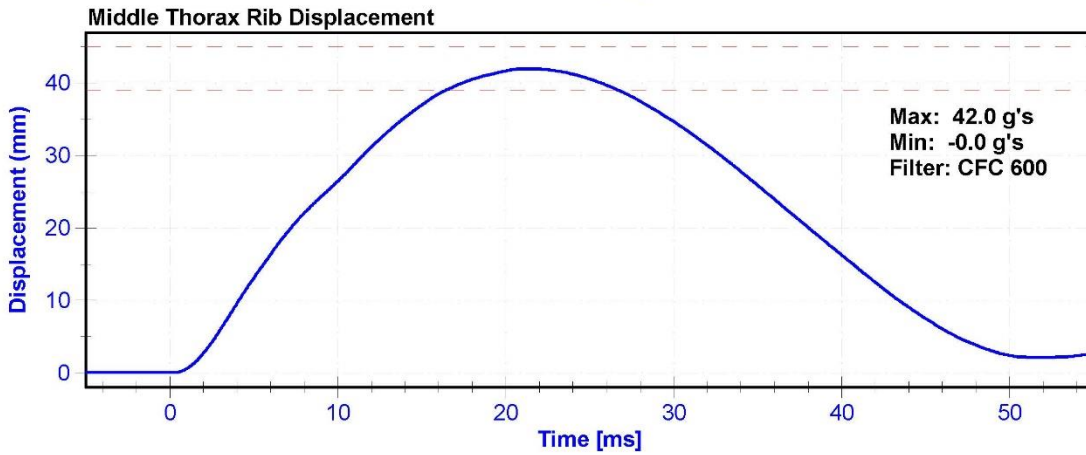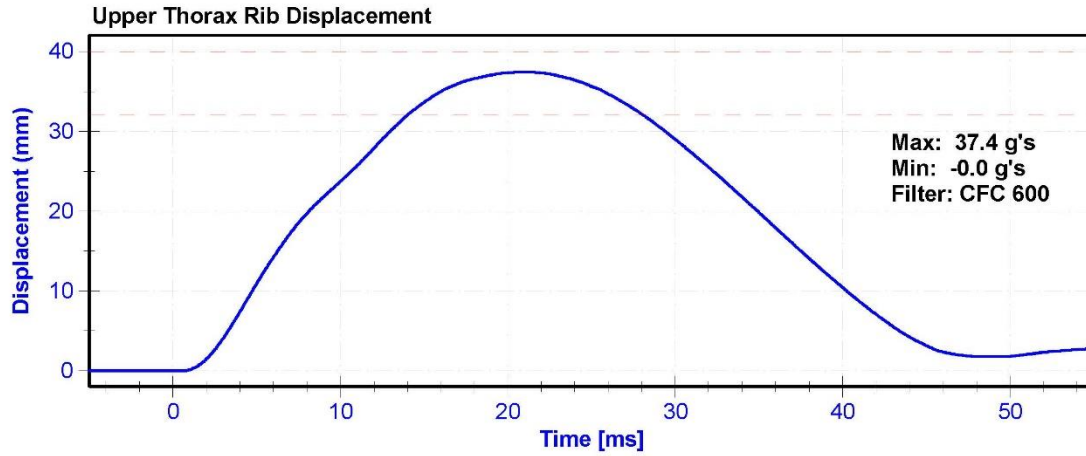

Lateral Upper Spine Acceleration

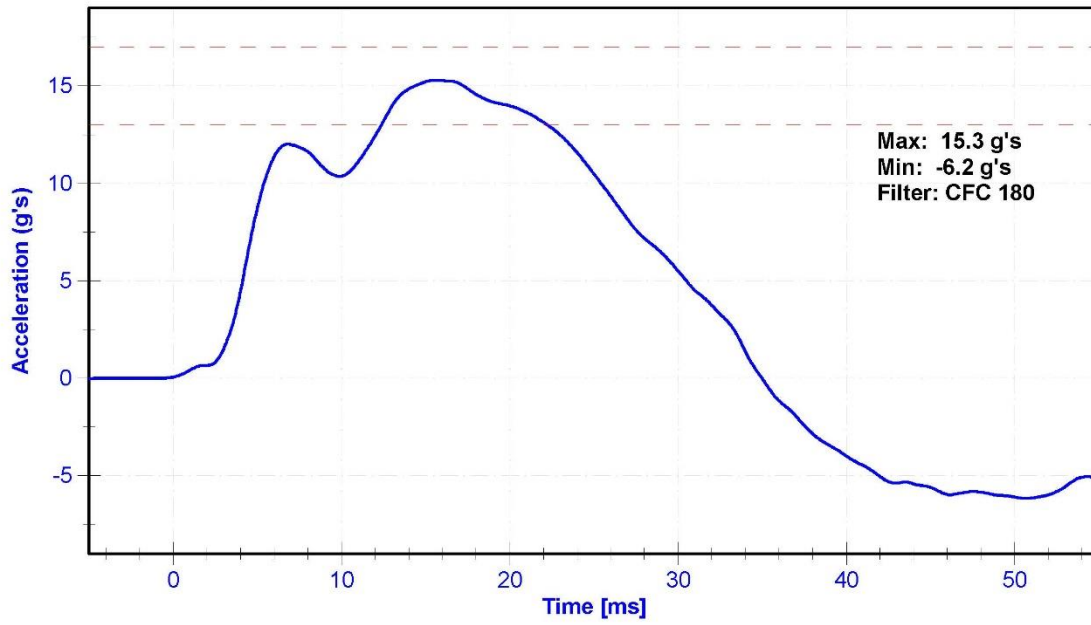

Lateral Lower Spine Acceleration

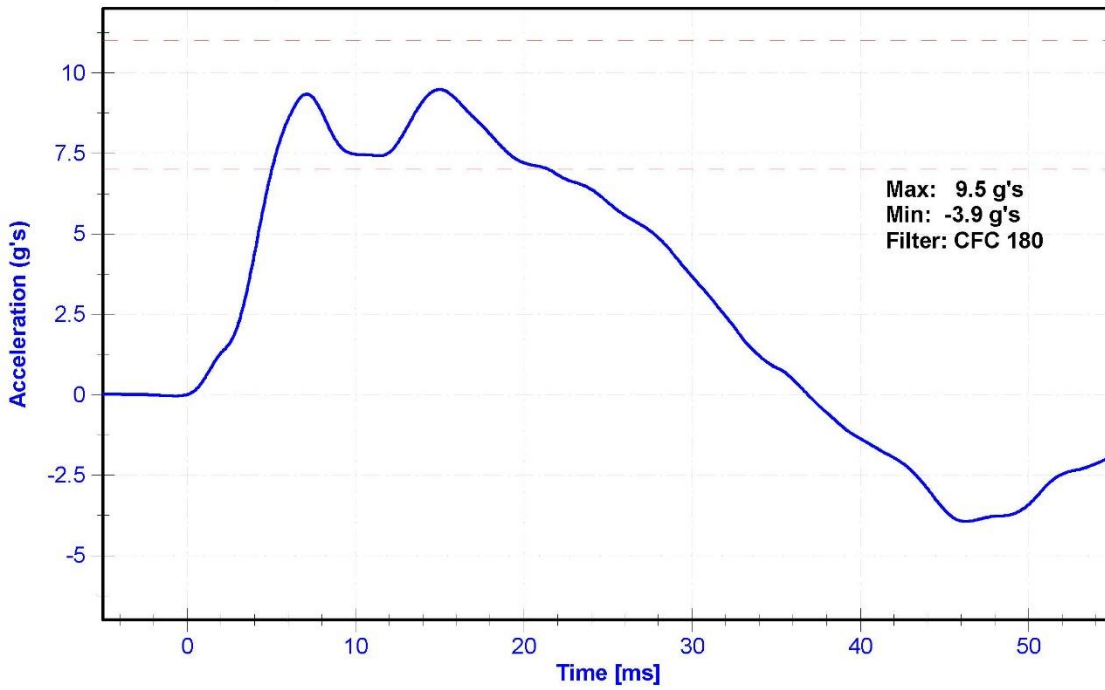


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	DG8012	Laboratory Supervisor	M. Goehle



**Results**


Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.2	Pass
Humidity	10	70	%	30.8	Pass
Velocity	4.2	4.4	m/s	4.30	Pass
Probe Acceleration	12	16	g's	13.6	Pass
Lateral Lower Spine Acceleration	9	14	g's	10.1	Pass
Upper Abdomen Rib Deflection	36	47	mm	45.6	Pass
Lower Abdomen Rib Deflection	33	44	mm	42.3	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	ENDEVCO 7264CT	AC-P21393	5/27/2016	11/25/2016
Lower Spine Y Accelerometer	ENDEVCO 7264	AC-P83319	10/4/2016	4/4/2017
Upper Abdomen Rib Potentiometer	Servo 08TC1-3787	DS-015GFE	6/15/2016	6/15/2017
Lower Abdomen Rib Potentiometer	Servo 08TC1-3745	DS-1774GFE	6/15/2016	6/15/2017

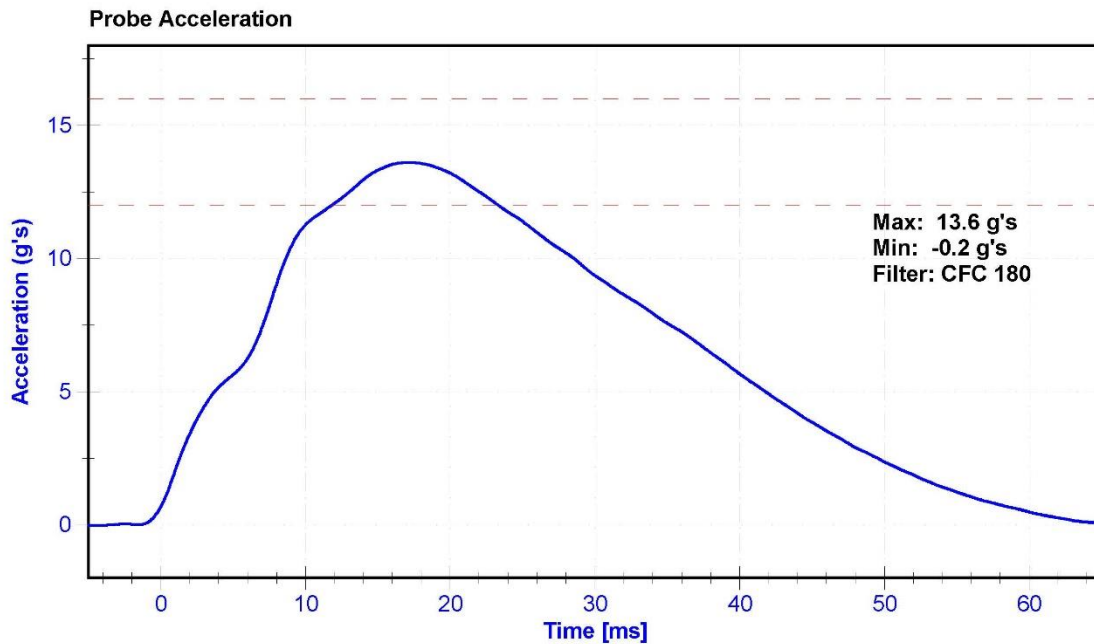

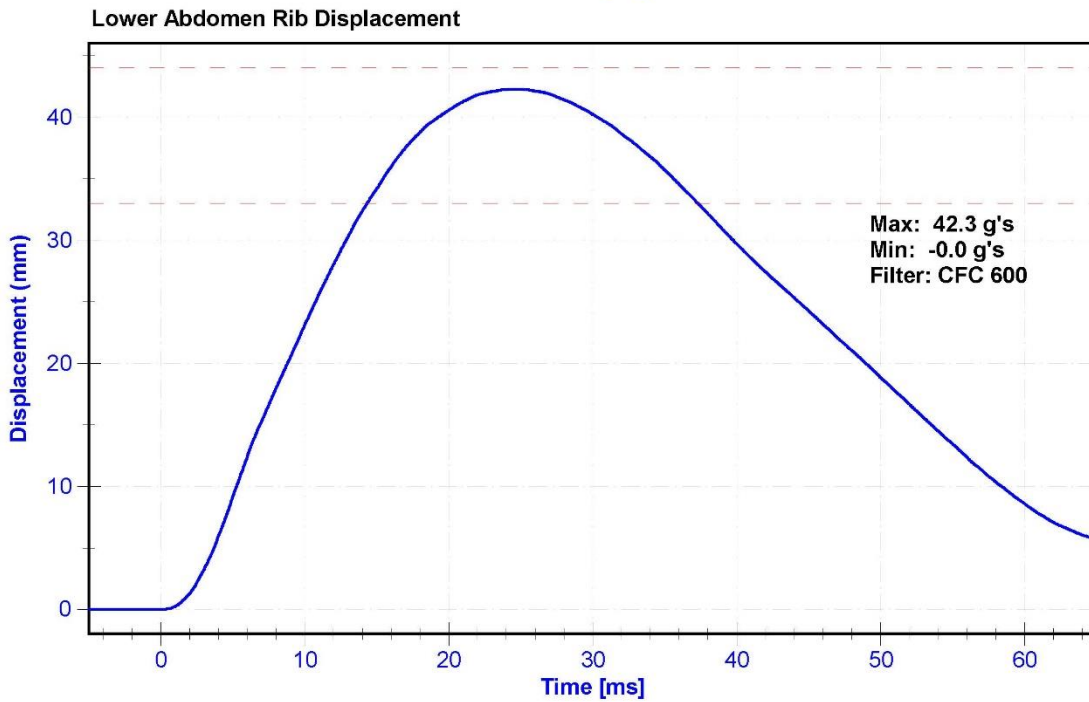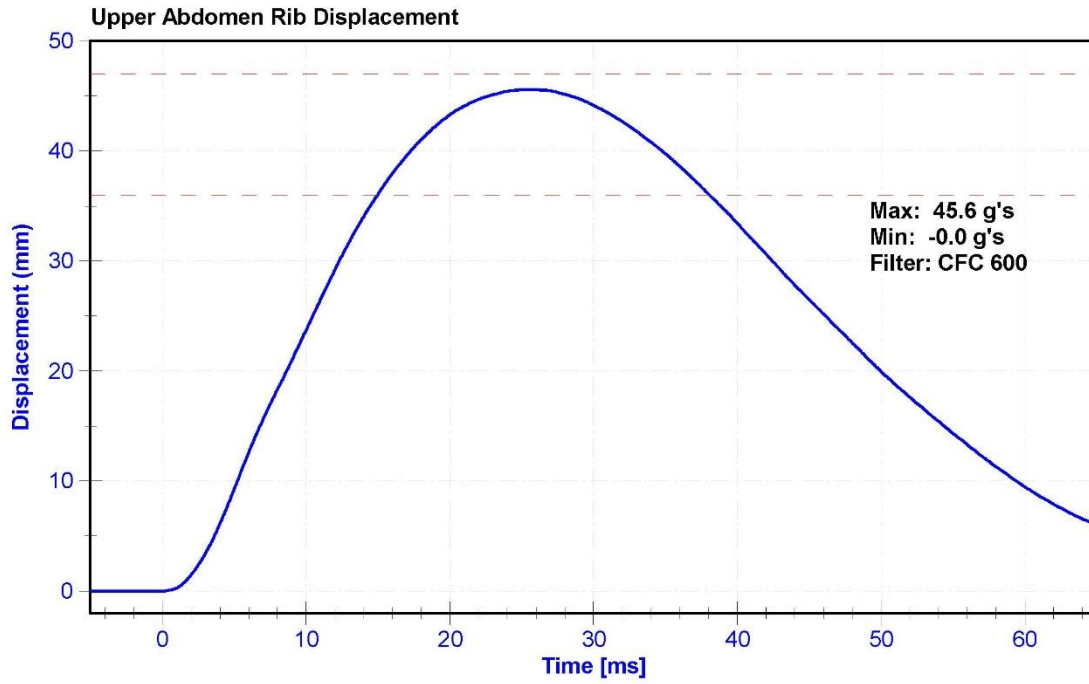

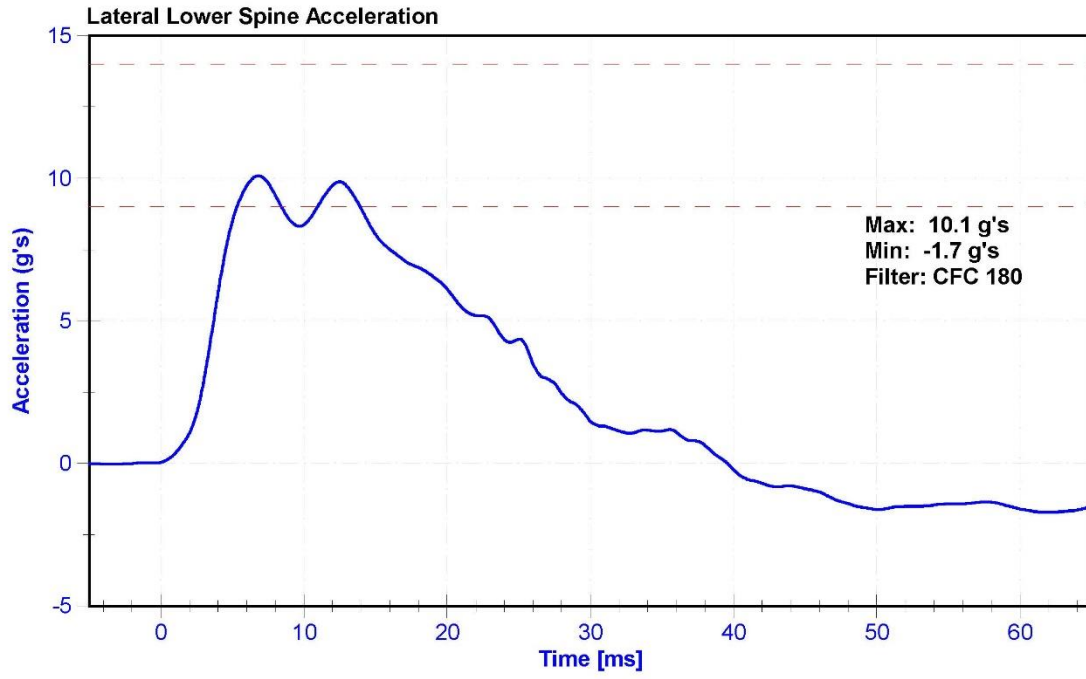


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	DG8012	Laboratory Supervisor	M. Goehle



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.9	Pass
Humidity	10	70	%	30.2	Pass
Velocity	6.6	6.8	m/s	6.66	Pass
Probe Acceleration	38	47	g's	43.4	Pass
Lateral Pelvis Acceleration after 6ms	34	42	g's	36.2	Pass
Acetabulum Force	3600	4300	N	4023.6	Pass


**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P21393	5/27/2016	11/25/2016
Pelvis Y Accelerometer	ENDEVCO 7264CT	AC-P63561	10/3/2016	4/3/2017
Acetabulum Load Cell	Denton 3249J	LC-267Fy	5/24/2016	5/24/2017
Certification Plug	Humanetics	81143	12/04/2014	N/A
Crash Test Plug	Humanetics	81134	12/04/2014	N/A

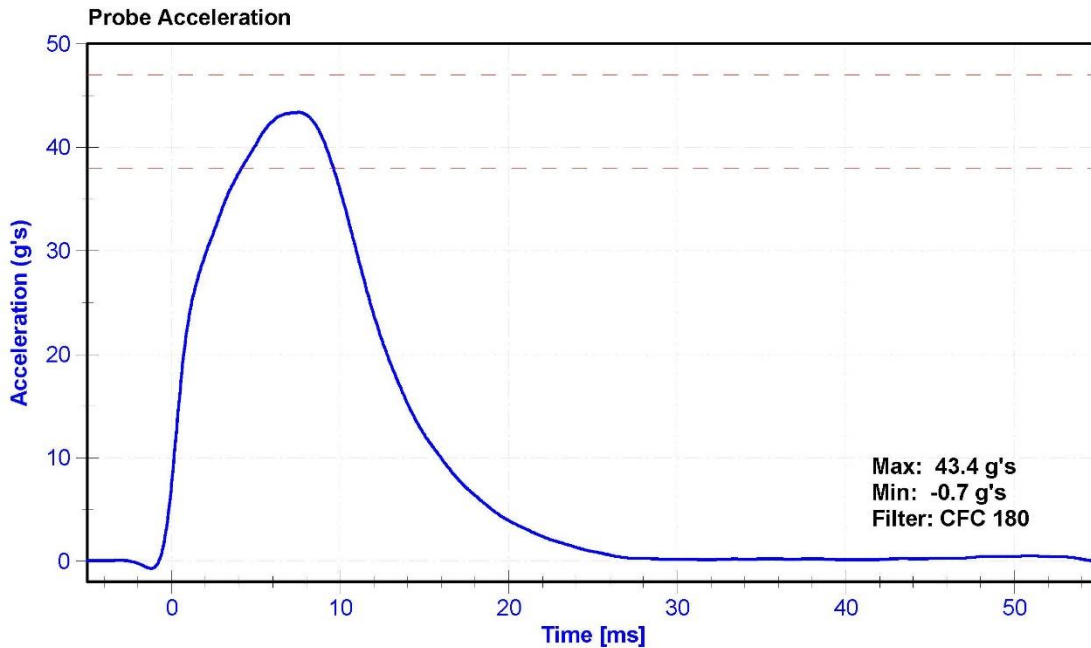

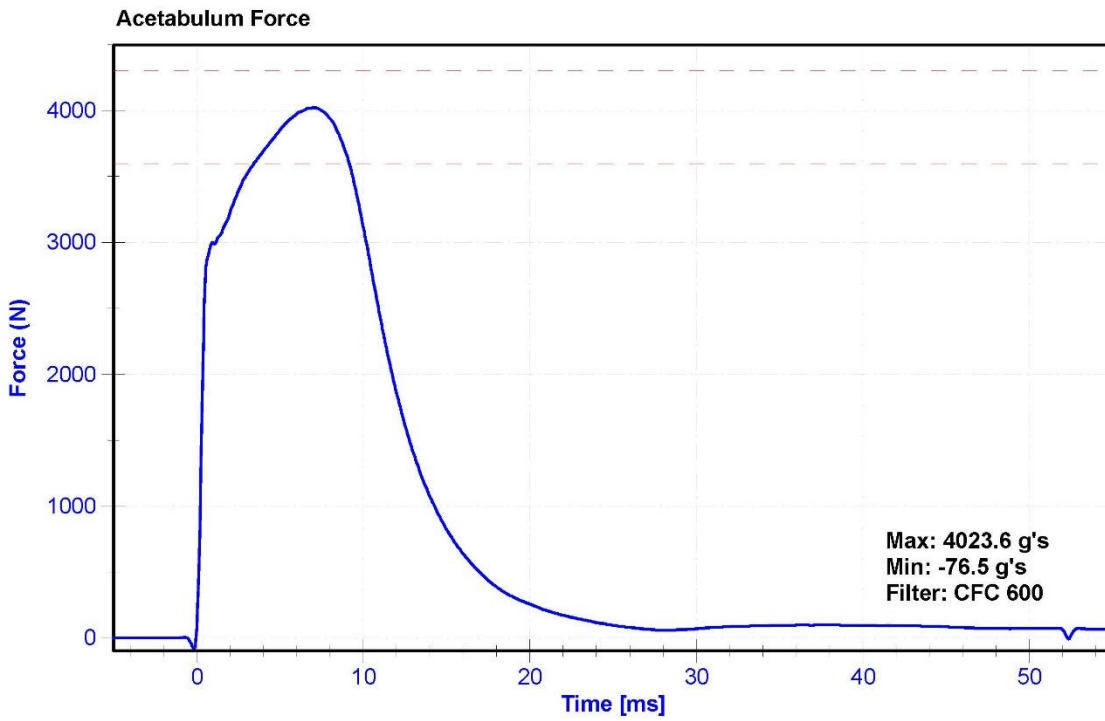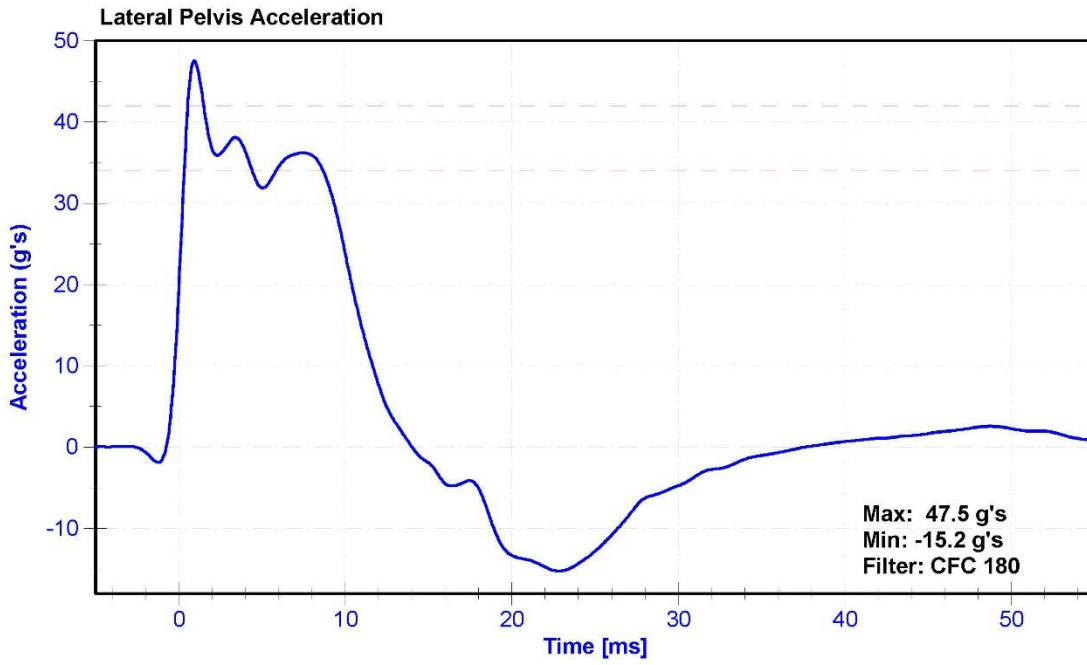

**Resultant Data - SIDIIs Plug Compression**

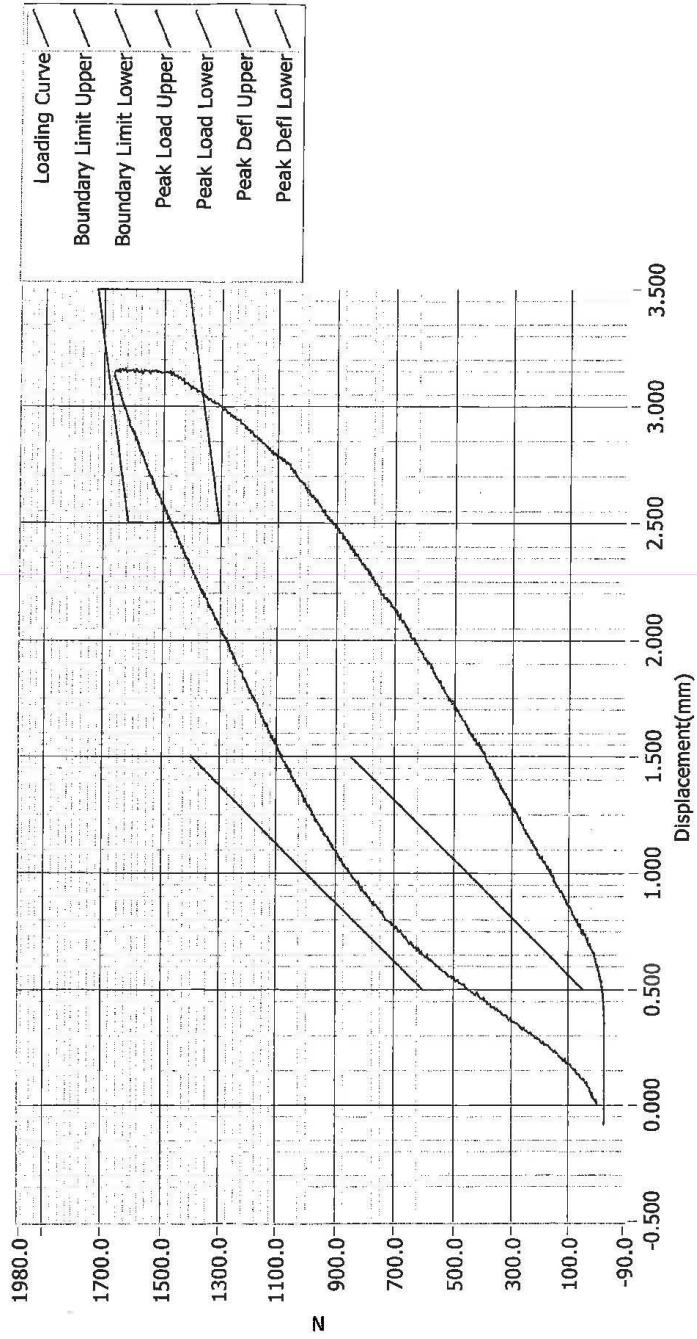


ATD Calibration Lab

CERT. LOG  
11114116  
MKG

Test ID	Part Serial Number	Test Date	Test Time
Cert ID	ATD Serial Number	ATD Type	
	N/A	SIDIIs	
	81143	12/4/2014	11:53 PM

Current Date : 12/4/2014      Current Time : 23:54:43

**Resultant Data - SIDIIs Plug Compression**

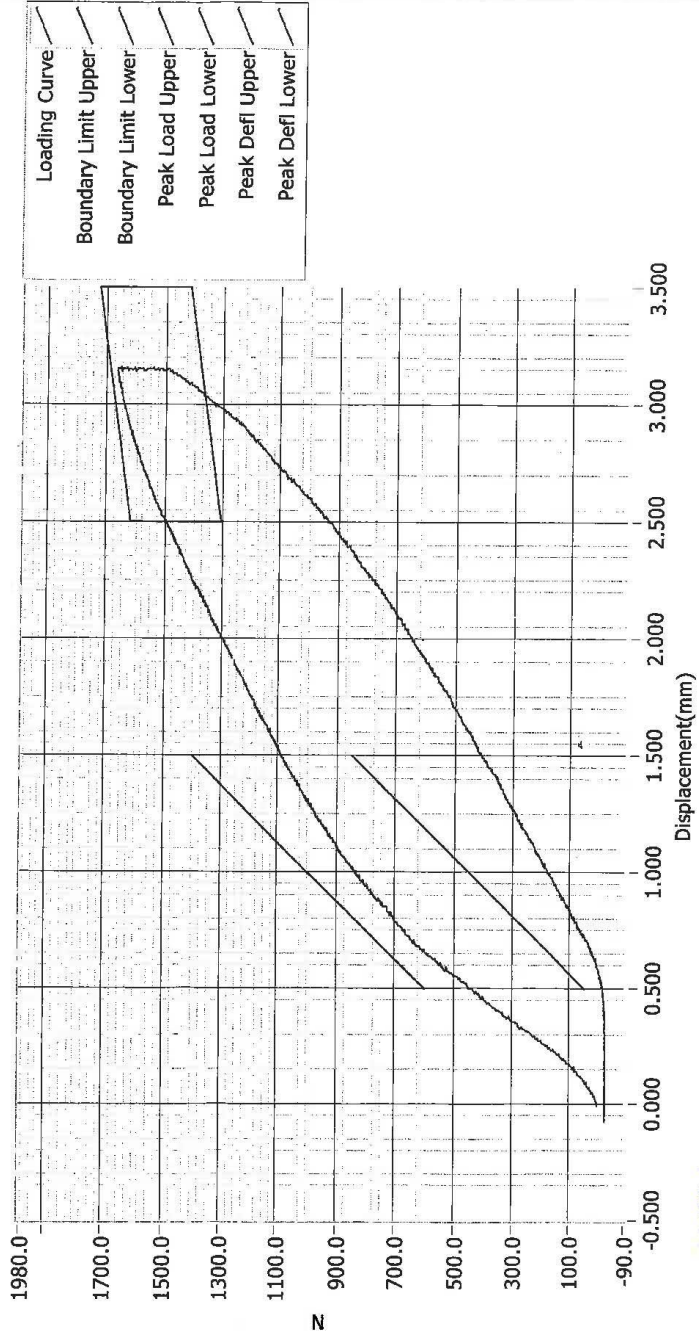

1644N

ATD Calibration Lab

CRASH PLUG

11/14/16

MKG

Test ID	Part Serial Number	Test Date	Test Time
	81134	12/4/2014	11:30 PM
Cert ID	ATD Serial Number	ATD Type	SIDIIs
	N/A		

Current Date : 12/4/2014      Current Time : 23:31:34


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	DG8012	Laboratory Supervisor	M. Goehle



**Results**

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	29.7	Pass
Velocity	4.2	4.4	m/s	4.31	Pass
Probe Acceleration	36	45	g's	41.4	Pass
Lateral Pelvis Acceleration	28	39	g's	33.9	Pass
Iliac Force	4100	5100	N	4832.0	Pass

**Transducer Calibrations**

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P21393	5/27/2016	11/25/2016
Pelvis Y Accelerometer	ENDEVCO 7264CT	AC-P63561	10/3/2016	4/3/2017
Iliac Load Cell	DENTON 3228J	LC-281Fy	5/24/2016	5/24/2017

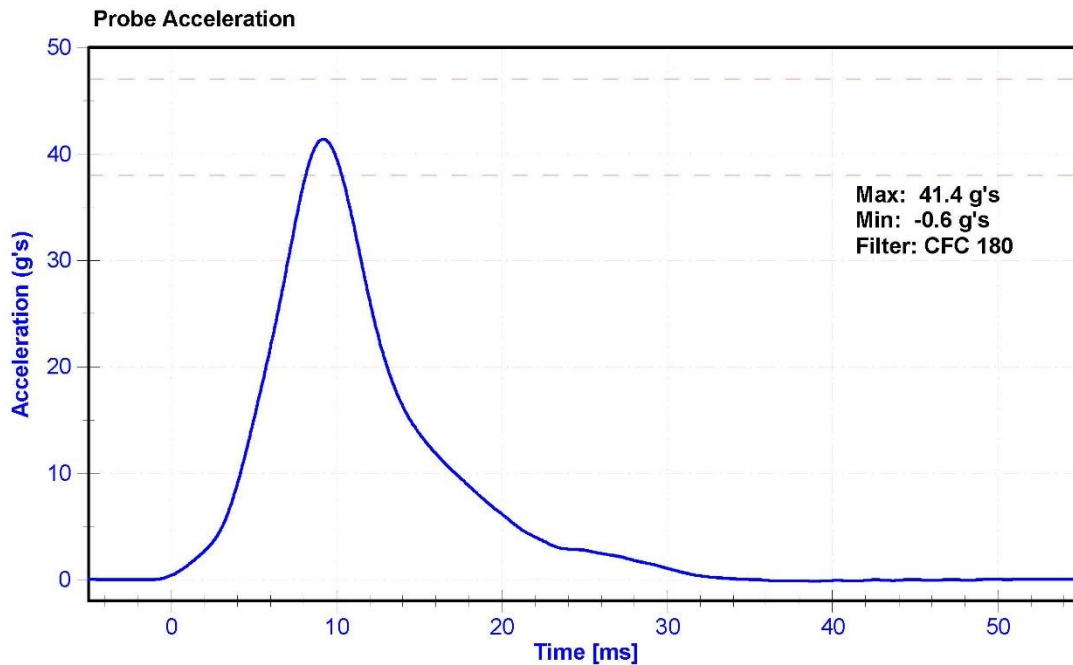

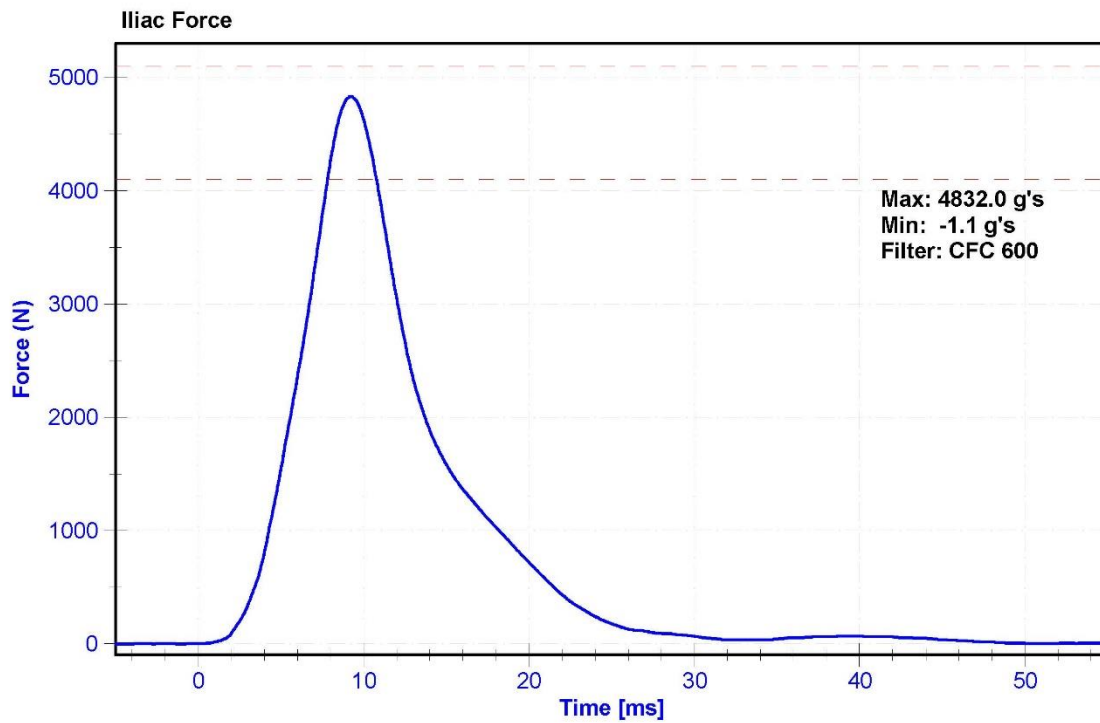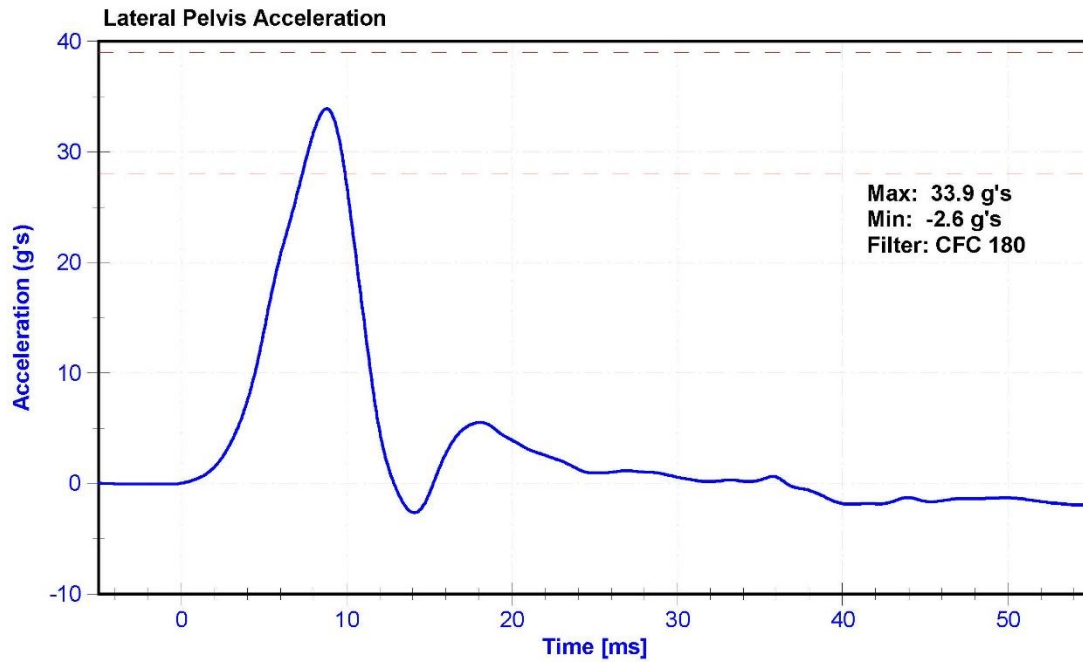

**APPENDIX D**

**TEST EQUIPMENT AND INSTRUMENTATION CALIBRATION DATA**

**Table 1 – Dummy Instrumentation (ES-2re)**

			ES-2re S/N: F034		
			Serial Number	Manufacturer	Calibration Date
Head Accelerometers	Primary	X	AC-P58904	ENDEVCO	6/20/2016
		Y	AC-P58911	ENDEVCO	6/20/2016
		Z	AC-P58776	ENDEVCO	6/20/2016
	Redundant	X	AC-P58887	ENDEVCO	6/20/2016
		Y	AC-P58888	ENDEVCO	6/20/2016
		Z	AC-P51734	ENDEVCO	6/20/2016
Thorax Rib Displacement Potentiometers	Upper	Y	DS-183GFE	HONEYWELL	6/20/2016
	Middle	Y	DS-184GFE	HONEYWELL	6/20/2016
	Lower	Y	DS-182GFE	HONEYWELL	6/20/2016
Abdomen Load Cells	Forward	Y	LC-1512	DENTON	5/24/2016
	Middle	Y	LC-1526	DENTON	5/24/2016
	Rear	Y	LC-1516	DENTON	5/24/2016
Lower Spine Accelerometers (T12)		X	AC-P52079	ENDEVCO	6/20/2016
		Y	AC-P51948	ENDEVCO	6/20/2016
		Z	AC-P51269	ENDEVCO	6/20/2016
Pubic Symphysis Load Cell		Y	LC-465Fy	DENTON	5/24/2016

**Table 2 – Dummy Instrumentation (SID-IIs)**

			SID-IIs S/N: DG8012			
			Serial Number	Manufacturer	Calibration Date	
Head Accelerometers	Primary	X	AC-P51685	ENDEVCO	9/30/2016	
		Y	AC-P51682	ENDEVCO	9/30/2016	
		Z	AC-P51699	ENDEVCO	9/30/2016	
	Redundant	X	AC-P51701	ENDEVCO	9/30/2016	
		Y	AC-P45019	ENDEVCO	9/30/2016	
		Z	AC-P51690	ENDEVCO	9/30/2016	
Displacement Potentiometers	Thoracic Rib	Upper	Y	DS-808GFE	SERVO	6/15/2016
		Middle	Y	DS-1514GFE	SERVO	6/15/2016
		Lower	Y	DS-011GFE	SERVO	6/15/2016
	Abdominal Rib	Upper	Y	DS-015GFE	SERVO	6/15/2016
		Lower	Y	DS-1774GFE	SERVO	6/15/2016
Lower Spine Accelerometers (T12)		X	AC-P74788	ENDEVCO	10/4/2016	
		Y	AC-P83319	ENDEVCO	10/4/2016	
		Z	AC-P83432	ENDEVCO	10/4/2016	
Acetabulum Load Cell		Y	LC-267Fy	DENTON	5/24/2016	
Iliac Wing Load Cell		Y	LC-281Fy	DENTON	5/24/2016	
Pelvis Plug (struck side)			81134	HUMANETICS	12/04/2014	
Pelvis Plug (non-struck side)			-	-	-	

**Table 3 – Vehicle Instrumentation**

Vehicle Instrumentation			Serial Number	Manufacturer	Calibration Date
1	Vehicle Center of Gravity	X	AC-A192205	Measurement Specialties 1201-1000	10/12/2016
	Vehicle Center of Gravity	Y	AC-A192210	Measurement Specialties 1201-1000	10/12/2016
	Vehicle Center of Gravity	Z	AC-A196991	MSI 1201-1000	5/17/2016
2	Right Sill at Front Seat	X	AC-A192215	Measurement Specialties 1201-1000	10/12/2016
	Right Sill at Front Seat	Y	AC-A192219	Measurement Specialties 1201-1000	10/12/2016
	Right Sill at Front Seat	Z	AC-A192227	Measurement Specialties 1201-1000	10/12/2016
3	Right Sill at Rear Seat	X	AC-A196989	MSI 1201-1000	5/17/2016
	Right Sill at Rear Seat	Y	AC-A196992	MSI 1201-1000	5/17/2016
	Right Sill at Rear Seat	Z	AC-A196997	MSI 1201-1000	5/17/2016
4	Left Sill at Front Door	Y	AC-A192232	Measurement Specialties 1201-1000	10/19/2016
5	Left Sill at Rear Door	Y	AC-A192229	Measurement Specialties 1201-1000	10/19/2016
6	Left A-Post Lower	Y	AC-A192225	Measurement Specialties 1201-1000	10/19/2016
7	Left A-Post Middle	Y	AC-A192213	Measurement Specialties 1201-1000	10/19/2016
8	Left B-Post Lower	Y	AC-A192209	Measurement Specialties 1201-1000	10/19/2016
9	Left B-Post Middle	Y	AC-A192221	Measurement Specialties 1201-1000	10/19/2016
10	Front Seat Track	Y	AC-A156947	MSI 1201	10/17/2016
11	Rear Seat Track or Structure	Y	AC-A156940	MSI 1201	10/19/2016
12	Right Rear Occ. Compartment	Y	AC-A197045	MSI 1201-1000	5/17/2016
13	Engine Block	X	AC-A192218	Measurement Specialties 1201-1000	10/14/2016
	Engine Block	Y	AC-A197061	MSI 1201-1000	5/13/2016
14	Rear Floorpan Above Axle	X	AC-A192200	Measurement Specialties 1201-1000	10/19/2016
	Rear Floorpan Above Axle	Y	AC-A192204	Measurement Specialties 1201-1000	10/19/2016
	Rear Floorpan Above Axle	Z	AC-A192224	Measurement Specialties 1201-1000	10/19/2016

**TABLE 4 – MDB Instrumentation**

<b>MDB Instrumentation</b>		<b>Serial Number</b>	<b>Manufacturer</b>	<b>Calibration Date</b>
MDB Center of Gravity	X	AC-C14901	ENDEVCO	10/7/2016
MDB Center of Gravity	Y	AC-CP30	ENDEVCO	10/7/2016
MDB Center of Gravity	Z	AC-C16680	ENDEVCO	10/7/2016
Left Frame at Rear Axle Centerline	X	AC-AH5M8	ENDEVCO	10/7/2016
Left Frame at Rear Axle Centerline	Y	AC-C16499	ENDEVCO	10/7/2016