

**REPORT NUMBER: NCAP305I-KAR-18-022**

**NEW CAR ASSESSMENT PROGRAM (NCAP)  
FMVSS NO. 305 INDICANT TEST**

**TESLA, INC.**

**2018 TESLA MODEL 3 LONG RANGE RWD 4-DOOR SEDAN**

**NHTSA NUMBER: O20185001**

**PREPARED BY:**

**APPLUS IDIADA KARCO ENGINEERING, LLC.**

**9270 HOLLY ROAD**

**ADELANTO, CA 92301**



**SEPTEMBER 6, 2018**

**FINAL REPORT**

**U.S. DEPARTMENT OF TRANSPORTATION  
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION  
OFFICE OF RULEMAKING  
MAIL CODE: NRM-110  
1200 NEW JERSEY AVE, SE  
ROOM W43-410  
WASHINGTON, DC 20590**

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared By: \_\_\_\_\_  
  
Mr. Robert S. Ramos, Program Manager  
Applus IDIADA KARCO Engineering, LLC.

Reviewed By: \_\_\_\_\_  
  
Mr. Michael L. Dunlap, Director of Operations  
Applus IDIADA KARCO Engineering, LLC.

Approved By: \_\_\_\_\_  
  
Mr. Steven D. Matsusaka, Engineering Manager  
Applus IDIADA KARCO Engineering, LLC.

Approval Date: \_\_\_\_\_ September 6, 2018 \_\_\_\_\_

FINAL REPORT ACCEPTANCE BY OCWS:

\_\_\_\_\_  
Division Chief, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date: \_\_\_\_\_

\_\_\_\_\_  
COTR, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date: \_\_\_\_\_

## TECHNICAL REPORT DOCUMENTATION PAGE

<b>1. Report No.</b> NCAP305I-KAR-18-022	<b>2. Government Accession No.</b>	<b>3. Recipient's Catalog No.</b>	
<b>4. Title and Subtitle</b> Final Report of New Car Assessment Program FMVSS 305 Indicant Testing of a 2018 Tesla Model 3 Long Range RWD 4-Door Sedan NHTSA No. O20185001		<b>5. Report Date</b> September 6, 2018	
		<b>6. Performing Organization Code</b> KAR	
<b>7. Authors</b> Mr. Robert S. Ramos, Program Manager, Applus IDIADA KARCO Mr. Steven D. Matsusaka, Engineering Manager, Applus IDIADA KARCO		<b>8. Performing Organization Report No.</b> TR-P38235-01E-NC	
		<b>10. Work Unit No.</b>	
<b>9. Performing Organization Name and Address</b> Applus IDIADA KARCO Engineering, LLC. 9270 Holly Rd. Adelanto, CA 92301		<b>11. Contract or Grant No.</b> DTNH22-13-D-00311L	
		<b>13. Type of Report and Period Covered</b> Final Test Report, August 22 - September 6, 2018	
<b>12. Sponsoring Agency Name and Address</b> U. S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards Mail Code: NRM-110 1200 New Jersey Ave., SE, Room W43-410 Washington, D.C. 20590		<b>14. Sponsoring Agency Code</b> NRM-110	
		<b>15. Supplementary Notes</b>	
<b>16. Abstract</b> An FMVSS No. 305 Indicant test, in conjunction with an oblique rigid pole side NCAP impact test was conducted on the subject 2018 Tesla Model 3 Long Range RWD 4-door sedan in accordance with the specifications of the applicable Office of Crashworthiness Standards Test Procedure for the generation of consumer information for the New Car Assessment Program (NCAP). No test failures were reported.			
<b>17. Key Words</b> New Car Assessment Program (NCAP) FMVSS 305 Indicant		<b>18. Distribution Statement</b> Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division, NPO-411 1200 New Jersey Ave., SE Washington, DC 20590 e-mail: tis@nhtsa.dot.gov FAX: 202-493-2833	
<b>19. Security Classification of this report</b> UNCLASSIFIED	<b>20. Security Classification of this page</b> UNCLASSIFIED	<b>21. No. of Pages</b> 40	<b>22. Price</b>

## TABLE OF CONTENTS

<u>Section</u>		<u>Page No.</u>
1	Test Purpose and Procedure	1
2	Summary of Test Results	2
3	Data Sheets	3
<u>Data Sheet No.</u>		<u>Page No.</u>
1	Test Vehicle Information	4
2	Pre-Impact Data	6
3	Pre-Impact Electrical Isolation Measurements and Calculations	7
4	Post-Impact Data	8
5	Static Rollover Test Data	9
<u>Appendix</u>		<u>Page No.</u>
A	Photographs	A

**SECTION 1**  
**TEST PURPOSE AND PROCEDURE**

An FMVSS No. 305 Indicant test, in conjunction with an oblique rigid pole side NCAP impact test was conducted on the subject 2018 Tesla Model 3 Long Range RWD 4-door sedan.

The indicant test was conducted in accordance with the Office of Crashworthiness Standards Laboratory Test Procedure, dated September 2012, to determine compliance to the requirements of Federal Motor Vehicle Safety Standard (FMVSS) No. 305, 'Electric-Powered Vehicles: Electrolyte Spillage and Electrical Shock Protection' for the purpose of providing consumer information.

This FMVSS No. 305 Indicant test is part of the MY 2018 New Car Assessment Program Test Program, sponsored by the National Highway Traffic Safety Administration (NHTSA), under contract no. DTNH22-13-D-00311L.

## **SECTION 2**

### **SUMMARY OF TEST RESULTS**

An oblique rigid pole side NCAP impact test was performed by Applus IDIADA KARCO Engineering, LLC. on a 2018 Tesla Model 3 Long Range RWD 4-door sedan on August 22, 2018. Electrical isolation measurements were taken immediately post-impact and observations were made relating to electrolyte spillage and battery retention. A static rollover was subsequently performed on the subject vehicle and electrical isolation measurements were taken at each stage of the rollover.

Based on the test results, the 2018 Tesla Model 3 Long Range RWD 4-door sedan appears to meet the requirements for electrolyte spillage, electrical isolation, and battery retention during FMVSS No. 305 indicant testing.

Data sheets, along with pre-test and post-test photographs of the test vehicle, are included in this report to document the test.

The NHTSA number in the placards used in Appendix A of this report are listed incorrectly with the first character as the numeral zero "0" instead of the letter "O".

**SECTION 3  
DATA SHEETS**

Test Vehicle: 2018 Tesla Model 3 Long Range RWD 4-Door Sedan NHTSA No.: O20185001  
 Test Program: FMVSS No. 305 Indicant Test Test Date: 08/22/18

**CONVERSION FACTORS**

Quantity	Typical Application	Std Units	Metric Unit	Multiply By
Mass	Vehicle Weight	lb	kg	0.4536
Linear Velocity	Impact Velocity	miles/hr	km/hr	1.609344
Length or Distance	Measurements	in	mm	25.4
Volume	Fuel Systems	gal	liter	3.785
Volume	Small Fluids	oz	mL	29.574
Pressure	Tire Pressures	lbf/in <sup>2</sup>	kPa	6.895
Temperature	General Use	°F	°C	$=(T_f - 32)/1.8$
Force	Dynamic Forces	lbf	N	4.448
Moment	Torque	lbf-ft	N•m	1.355

**ELECTRICAL CODES**

Code	Units	Description
$V_b$	V	Propulsion Battery Voltage
$V_1$	V	Propulsion Battery Negative to Chassis
$V_2$	V	Propulsion Battery Positive to Chassis
$R_o$	$\Omega$	Resistance of Grounding Circuit
$V_1'$	V	Propulsion Battery Negative to Chassis with $R_o$ installed
$V_2'$	V	Propulsion Battery Positive to Chassis with $R_o$ installed
$R_{i1}$	$\Omega$	Electrical Isolation Value of Propulsion Battery Negative to Chassis Ground
$R_{i2}$	$\Omega$	Electrical Isolation Value of Propulsion Battery Positive to Chassis Ground
$R_i$	$\Omega$	Electrical Isolation Value of Propulsion Battery - The Minimum of $R_{i1}$ and $R_{i2}$
$R_i/V_b$	$\Omega/v$	Electrical Isolation per Volt of Propulsion Battery

**DATA SHEET NO. 1**

**TEST VEHICLE INFORMATION**

Test Vehicle: 2018 Tesla Model 3 Long Range RWD 4-Door Sedan NHTSA No.: O20185001

Test Program: FMVSS No. 305 Indicant Test Test Date: 08/22/18

**TEST VEHICLE INFORMATION**

NHTSA Number	O20185001
Model Year	2018
Make	Tesla
Model	Model 3 Long Range RWD
Body Style	4-Door Sedan
Body Color	Black
Odometer Reading (km / mi)	117 / 73

**DATA FROM VEHICLE'S CERTIFICATION LABEL**

Manufactured By	Tesla, Inc.
Date of Manufacture	Jul-18
VIN	5YJ3E1EAXJF061252
GVWR (kg)	2180

**ELECTRIC VEHICLE PROPULSION SYSTEM**

Type of Electrical Vehicle	Electric
Propulsion Battery Type	Lithium-Ion
Nominal Voltage (V)	350
Automatic Propulsion Battery Disconnect	Yes
Physical Location of Automatic Propulsion Battery Disconnect	Internal to HV Battery
Auxiliary Battery Type	12 Volt Lead Acid

**PROPULSION BATTERY SYSTEM DATA**

Electrolyte Fluid Type	Organic Electrolyte
Electrolyte Fluid Specific Gravity (g/cc)	1.2
Electrolyte Fluid Dynamic Viscosity (mPa s)	2.6
Electrolyte Fluid Color	Clear
Propulsion Battery Coolant Type	G48 Ethylene Glycol
Propulsion Battery Coolant Color	Light Blue
Propulsion Battery Coolant Specific Gravity	1.122 / 1.0

**LOCATION OF BATTERY MODULES**

Location	Beneath the occupant compartment underneath the vehicle; floor-mounted HV battery
----------	---

**DATA SHEET NO. 1 ... (CONTINUED)**

**TEST VEHICLE INFORMATION**

Test Vehicle: 2018 Tesla Model 3 Long Range RWD 4-Door Sedan NHTSA No.: O20185001

Test Program: FMVSS No. 305 Indicant Test Test Date: 08/22/18

*For all battery types:*

<b>Description</b>	<b>Volts</b>
Minimum Operating Voltage	240.0
Maximum Operating Voltage	403.2
95% of Maximum Operating Voltage	383.0
Test Voltage (no less than 95% of Maximum)	402.3

*For batteries that are rechargeable ONLY by an energy source on the vehicle:*

<b>Description</b>	<b>Volts</b>
Minimum Operating Voltage	
Maximum Operating Voltage	
Test Voltage (Maximum practicable state of charge within normal operating range)	

**DATA SHEET NO. 2**

**PRE-IMPACT DATA**

Test Vehicle: 2018 Tesla Model 3 Long Range RWD 4-Door Sedan NHTSA No.: O20185001

Test Program: FMVSS No. 305 Indicant Test Test Date: 08/22/18

**VEHICLE CHASSIS GROUND POINT(S) LOCATION(S)**

DETAILS OF VEHICLE CHASSIS GROUND POINT(S) AND LOCATION(S):

The chassis ground used for the electrical isolation measurements was a pre-existing chassis ground point located under the rear seat cushion next to the battery penthouse cover.

---

**PROPULSION BATTERY SYSTEM**

DETAILS OF PROPULSION BATTERY COMPONENTS:

The electrical propulsion system utilizes one Lithium-Ion (Li-Ion) battery and a traction motor to propel the vehicle. The propulsion battery is located on the underside of the vehicle between the axles. The battery is equipped with an automatic disconnect located within the battery enclosure. The first responder disconnect is located in the front trunk area, near the base of the windshield on the left side of the vehicle. Another first responder disconnect is located in the C-Pillar of the vehicle on the passenger's side.

---

### DATA SHEET NO. 3

#### PRE-IMPACT ELECTRICAL ISOLATION MEASUREMENTS AND CALCULATIONS

Test Vehicle: 2018 Tesla Model 3 Long Range RWD 4-Door Sedan NHTSA No.: O20185001

Test Program: FMVSS No. 305 Indicant Test Test Date: 08/22/18

#### VOLTMETER INFORMATION

Make	Fluke
Model	16
Serial No.	82810107
Internal Impedence Value	10 M $\Omega$
Resolution	0.001

#### HV BATTERY ELECTRICAL ISOLATION DATA

Code	Units	Threshold	Pre-Test
V <sub>b</sub>	V		402.30
V <sub>1</sub>	V		175.10
V <sub>2</sub>	V		192.50
R <sub>o</sub>	$\Omega$		219,400
V <sub>1</sub> '	V		65.30
V <sub>2</sub> '	V		56.10
R <sub>i1</sub>	$\Omega$		774,489
R <sub>i2</sub>	$\Omega$		1,018,669
R <sub>i</sub>	$\Omega$		774,489
R <sub>i</sub> /V <sub>b</sub>	$\Omega/V$	500	1,925


Is the Measured Electrical Isolation Value $\geq$ 500 $\Omega/V$ ?	Yes
--	-----



**DATA SHEET NO. 5**  
**STATIC ROLLOVER TEST DATA**

Test Vehicle: 2018 Tesla Model 3 Long Range RWD 4-Door Sedan NHTSA No.: O20185001

Test Program: FMVSS No. 305 Indicant Test Test Date: 08/22/18

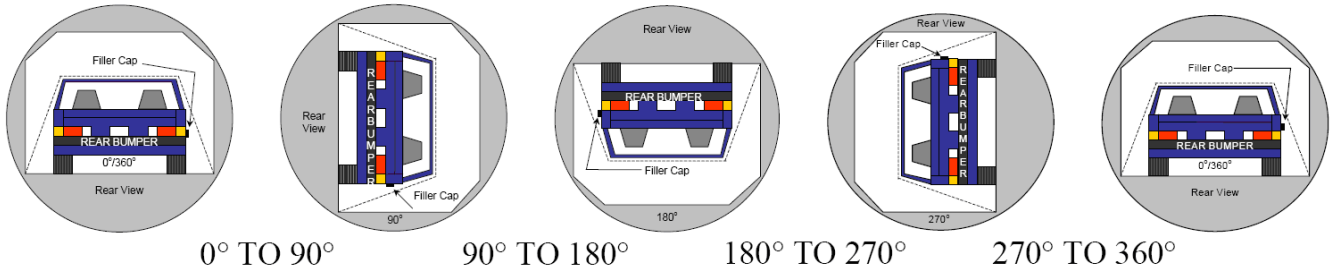

**PROPULSION BATTERY ELECTROLYTE COLLECTION TIME PERIOD**

Test Phase	Rotation Time	Hold Time	Total Time
0° To 90°	79	300	379
90° To 180°	82	300	382
180° To 270°	82	300	382
270° To 360°	80	300	380

**TEST VEHICLE PROPULSION BATTERY ELECTROLYTE SPILLAGE**

Test Phase	Propulsion Battery Electrolyte Spillage (L)	Spillage Location
0° To 90°	0.0	N/A
90° To 180°	0.0	N/A
180° To 270°	0.0	N/A
270° To 360°	0.0	N/A

Is the Total Propulsion Battery Electrolyte Spillage Greater Than 5.0 Liters?	No spillage occurred
Is the Propulsion Battery Electrolyte Spillage Visible in the Passenger Compartment?	N/A

**DATA SHEET NO. 5 ... (CONTINUED)**

**STATIC ROLLOVER TEST DATA**

Test Vehicle: 2018 Tesla Model 3 Long Range RWD 4-Door Sedan NHTSA No.: O20185001

Test Program: FMVSS No. 305 Indicant Test Test Date: 08/22/18

**VOLTMETER INFORMATION**

Make	Fluke
Model	16
Serial No.	82810107
Internal Impedance Value	10 MΩ
Resolution	0.001

**HV BATTERY ELECTRICAL ISOLATION MEASUREMENTS AND CALCULATIONS**

Code	Units	Threshold	0°	90°	180°	270°	360°
V <sub>b</sub>	V		8.66	8.66	8.66	8.67	8.67
V <sub>1</sub>	V		3.93	3.93	3.93	3.94	3.95
V <sub>2</sub>	V		4.26	4.27	4.27	4.27	4.27
R <sub>o</sub>	Ω		219,400	219,400	219,400	219,400	219,400
V <sub>1</sub> '	V		1.07	1.07	1.07	1.07	1.07
V <sub>2</sub> '	V		1.16	1.16	1.16	1.16	1.16
R <sub>i1</sub>	Ω		1,217,415	1,217,340	1,223,602	1,226,258	1,228,910
R <sub>i2</sub>	Ω		1,127,235	1,125,600	1,129,601	1,130,978	1,132,356
R <sub>i</sub>	Ω		1,127,235	1,125,600	1,129,601	1,130,978	1,132,356
R <sub>i</sub> /V <sub>b</sub>	Ω/V	500	130,166	129,977	130,439	130,447	130,606

Is the Measured Electrical Isolation Value ≥ 500 Ω/V?	Yes
---	-----

**APPENDIX A  
PHOTOGRAPHS**

## TABLE OF PHOTOGRAPHS

Figure		Page
1	Auxiliary Power Module Warning Label	A-1
2	Power Inverter Warning Label	A-1
2a	Power Inverter Warning Label	A-2
2b	Power Inverter Warning Label	A-2
3	First Responder Warning Label	A-3
4	First Responder Warning Location	A-3
5	Other Vehicle Label(s) Related to Electrical Propulsion System	A-4
6	Manual High Voltage Service Disconnect in Place	A-4
7	Manual High Voltage Service Disconnect Removed	A-5
8	Pre-Impact View of Propulsion Battery	A-5
9	Pre-Impact Front View of Propulsion Battery	A-6
10	Post-Impact Front View of Propulsion Battery	A-6
11	Pre-Impact Rear View of Propulsion Battery	A-7
12	Post-Impact Rear View of Propulsion Battery	A-7
13	Pre-Impact View of Battery Box(s) or Container(s) Which Holds Individual Battery Modules	A-8
14	Post-Impact View of Battery Box(s) or Container(s) Which Holds Individual Battery Modules	A-8
15	Pre-Impact View of Propulsion Battery Module(s)	A-9
16	Post-Impact View of Propulsion Battery Module(s)	A-9
17	Pre-Impact View of Electric Propulsion Drive	A-10
18	Post-Impact View of Electric Propulsion Drive	A-10
19	Pre-Impact View of High Voltage Interconnect(s)	A-11
19a	Pre-Impact View of High Voltage Interconnect(s)	A-11
20	Pre-Impact View Propulsion Battery Venting System(s)	A-12
20a	Pre-Impact View Propulsion Battery Venting System(s)	A-12
20b	Pre-Impact View Propulsion Battery Venting System(s)	A-13
21	Pre-Impact View of Other Visible Electric Propulsion Components	A-13
22	Pre-Impact View of Ground Lead Attached	A-14
23	Pre-Impact View of High Voltage Leads Attached	A-14
24	Pre-Impact Close-Up View of High Voltage Leads Attached	A-15
24a	Pre-Impact Close-Up View of High Voltage Leads Attached	A-15
25	Pre-Impact View of Installed Test Interface Port	A-16
26	Post-Impact View of Installed Test Interface Port	A-16
27	Pre-Impact View of Other Test Devices	A-17
28	Post-Impact View of Other Test Devices	A-17

## TABLE OF PHOTOGRAPHS ... (CONTINUED)

<u>Figure</u>		<u>Page</u>
29	FMVSS No. 305 Static Rollover at 0°	A-18
30	FMVSS No. 305 Static Rollover at 90°	A-18
31	FMVSS No. 305 Static Rollover at 180°	A-19
32	FMVSS No. 305 Static Rollover at 270°	A-19
33	FMVSS No. 305 Static Rollover at 360°	A-20
34	Pre-Impact View of the Vehicle Passenger Compartment Adjacent to Propulsion Battery	A-20
35	Post-Impact View of the Vehicle Passenger Compartment Adjacent to Propulsion Battery	A-21
36	Post-Impact Propulsion Battery System Mounting and/or Intrusion Failure(s)	A-21
37	Post-Impact View of Battery Component Intrusion	A-22
38	Post-Impact View of Propulsion Battery Module Movement or Retention Loss	A-22
39	Post-Impact View of Propulsion Battery Electrolyte Spillage Location	A-23
40	Post-Test View of Propulsion Battery Electrolyte Spillage Location	A-23

Photograph Not Applicable

No Auxiliary Power Module  
Warning Label

FIGURE 1. Auxiliary Power Module Warning Label



FIGURE 2. Power Inverter Warning Label



FIGURE 2a. Power Inverter Warning Label



FIGURE 2b. Power Inverter Warning Label

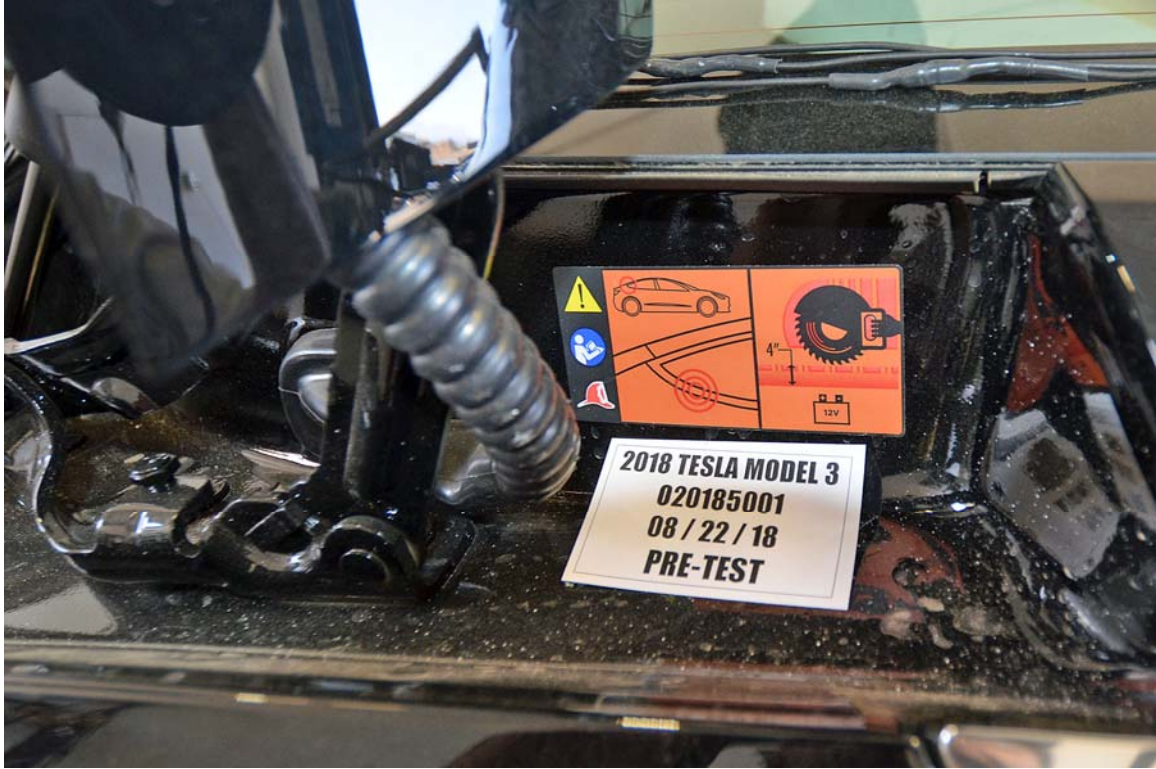


FIGURE 3. First Responder Warning Label



FIGURE 4. First Responder Warning Location

**Photograph Not Applicable**

**No Other Vehicle Label  
Related to Electric  
Propulsion System**

FIGURE 5. Other Vehicle Label(s) Related to Electrical Propulsion System

**Photograph Not Applicable**

**Vehicle Not Equipped with  
Manual High Voltage  
Service Disconnect**

FIGURE 6. Manual High Voltage Service Disconnect In Place

Photograph Not Applicable

Vehicle Not Equipped with  
Manual High Voltage  
Service Disconnect

FIGURE 7. Manual High Voltage Service Disconnect Removed



FIGURE 8. Pre-Impact View of Propulsion Battery

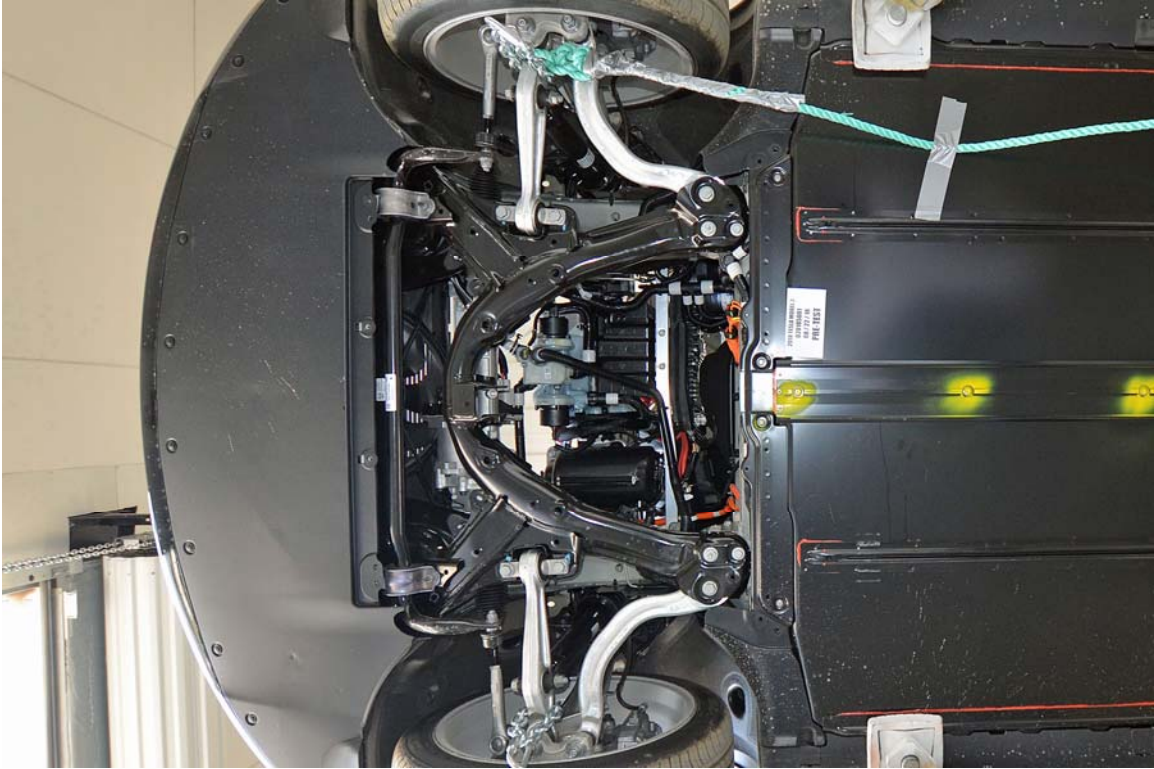


FIGURE 9. Pre-Impact Front View of Propulsion Battery

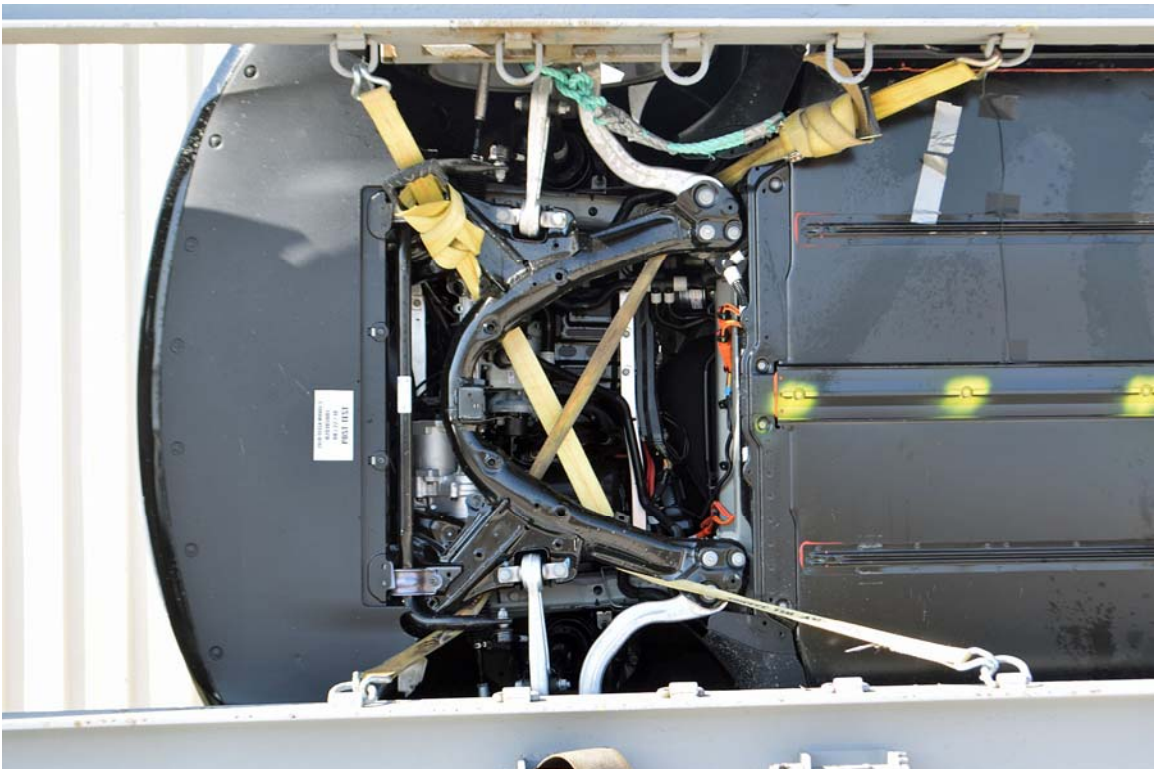


FIGURE 10. Post-Impact Front View of Propulsion Battery



FIGURE 11. Pre-Impact Rear View of Propulsion Battery



FIGURE 12. Post-Impact Rear View of Propulsion Battery

**Photograph Not Applicable**

**Battery Not Removed  
From Vehicle**

FIGURE 13. Pre-Impact View of Battery Box(s) or Container(s)  
Which Holds Individual Battery Modules

**Photograph Not Applicable**

**Battery Not Removed  
From Vehicle**

FIGURE 14. Post-Impact View of Battery Box(s) or Container(s)  
Which Holds Individual Battery Modules

Photograph Not Applicable

Battery Not Removed  
From Vehicle

FIGURE 15. Pre-Impact View of Propulsion Battery Module(s)

Photograph Not Applicable

Battery Not Removed  
From Vehicle

FIGURE 16. Post-Impact View of Propulsion Battery Module(s)

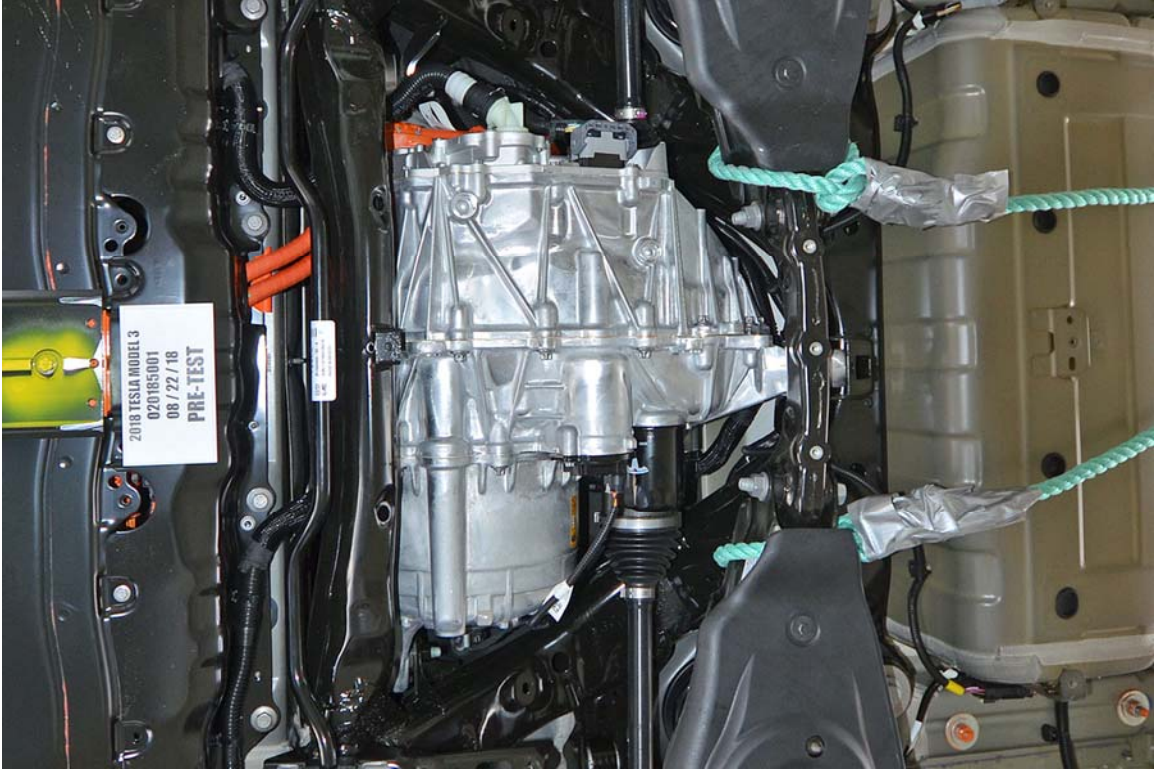


FIGURE 17. Pre-Impact View of Electric Propulsion Drive

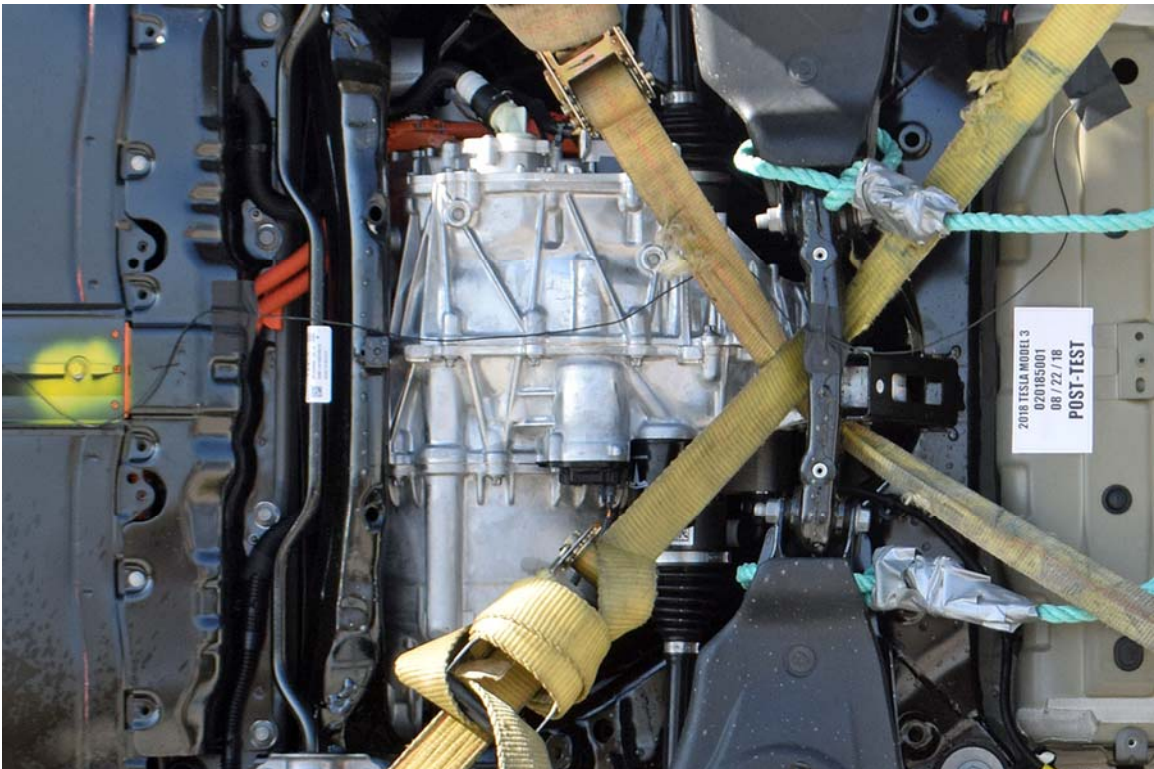


FIGURE 18. Post-Impact View of Electric Propulsion Drive



FIGURE 19. Pre-Impact View of High Voltage Interconnect(s)



FIGURE 19a. Pre-Impact View of High Voltage Interconnect(s)



FIGURE 20. Pre-Impact View of Propulsion Battery Venting System(s)



FIGURE 20a. Pre-Impact View of Propulsion Battery Venting System(s)

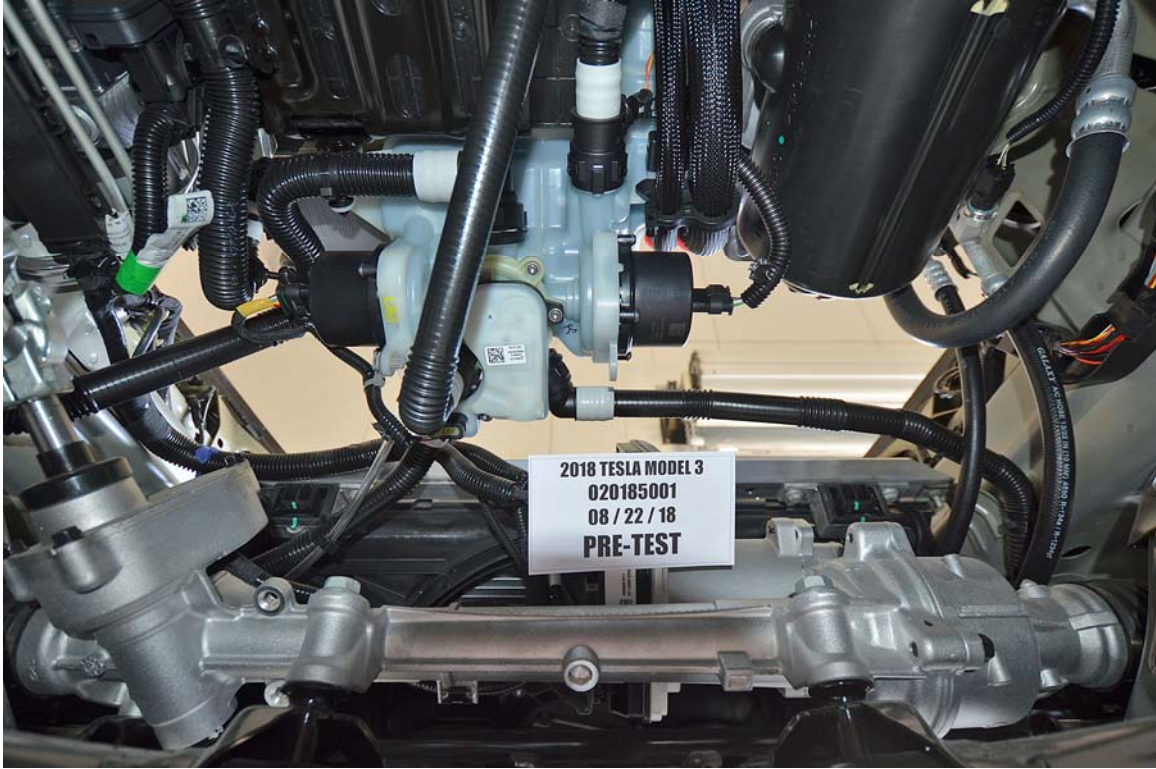


FIGURE 20b. Pre-Impact View of Propulsion Battery Venting System(s)

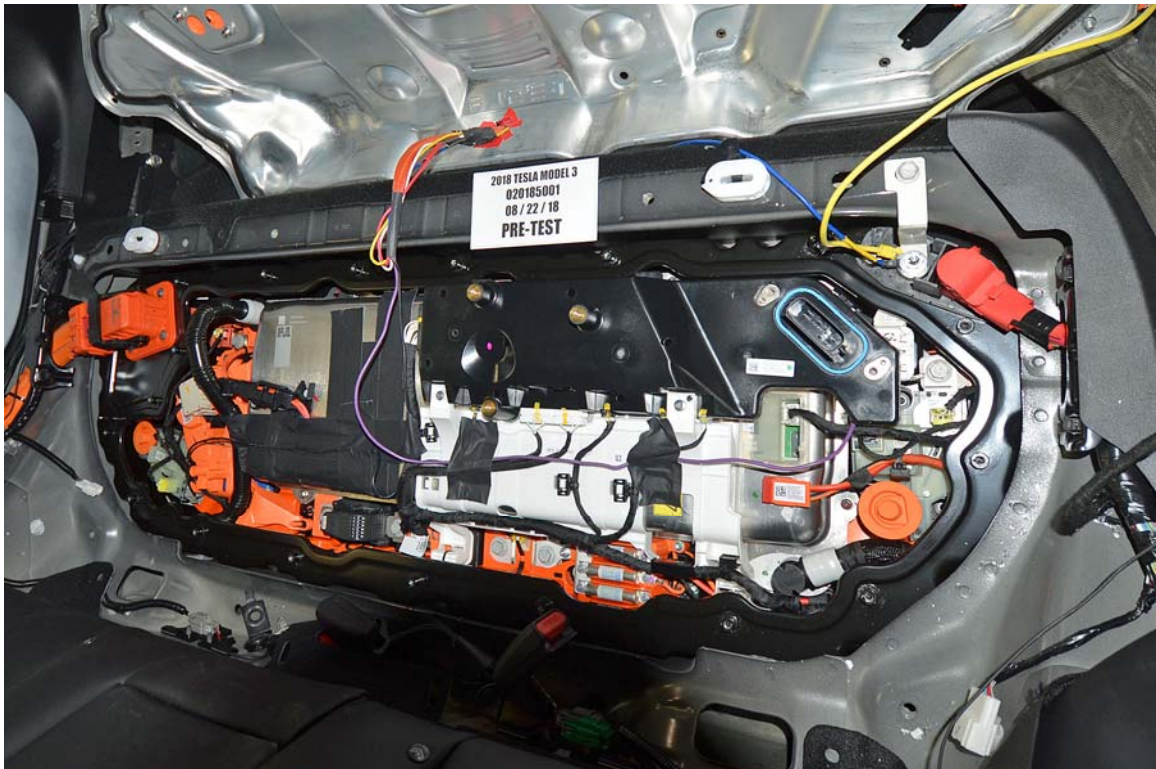


FIGURE 21. Pre-Impact View of Other Visible Electric Propulsion Components



FIGURE 22. Pre-Impact View of Ground Lead Attached



FIGURE 23. Pre-Impact View of High Voltage Leads Attached



FIGURE 24. Pre-Impact Close-Up View of High Voltage Leads Attached



FIGURE 24a. Pre-Impact Close-Up View of High Voltage Leads Attached



FIGURE 25. Pre-Impact View of Installed Test Interface Port



FIGURE 26. Post-Impact View of Installed Test Interface Port



FIGURE 27. Pre-Impact View of Other Test Devices

Photograph Not Available

FIGURE 28. Post-Impact View of Other Test Devices



FIGURE 29. FMVSS No. 305 Static Rollover at 0°

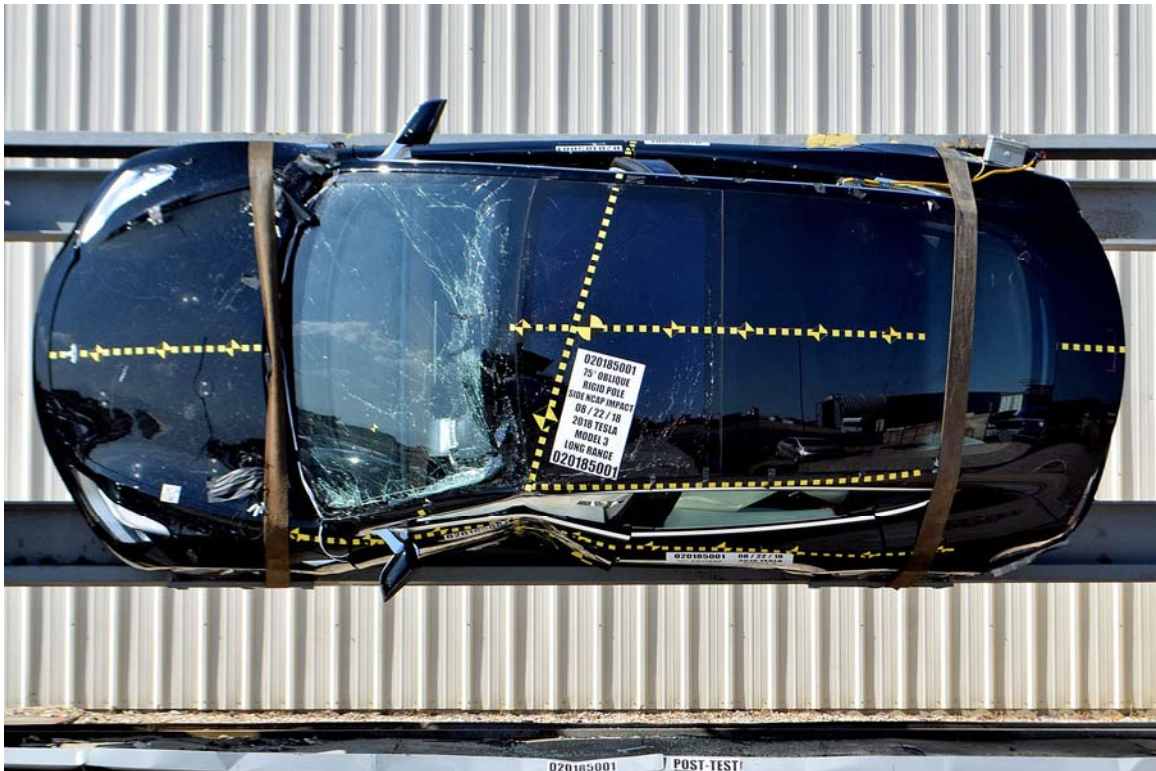


FIGURE 30. FMVSS No. 305 Static Rollover at 90°





FIGURE 33. FMVSS No. 305 Static Rollover at 360°

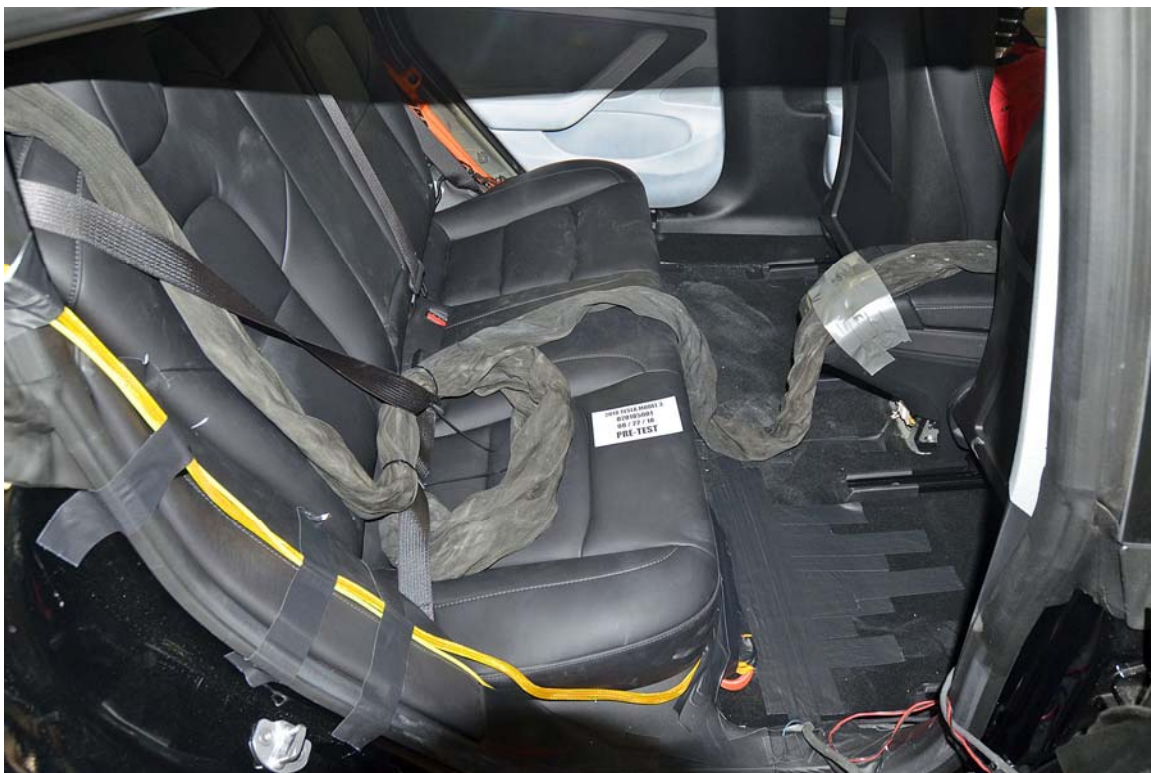


FIGURE 34. Pre-Impact View of the Vehicle Passenger Compartment Adjacent to Propulsion Battery



FIGURE 35. Post-Impact View of the Vehicle Passenger Compartment Adjacent to Propulsion Battery

**Photograph Not Applicable**

**No Propulsion Battery  
Mounting and/or  
Intrusion Failure**

FIGURE 36. Post-Impact View of Propulsion Battery System Mounting and/or Intrusion Failure(s)

**Photograph Not Applicable**

**No Battery Component  
Intrusion**

FIGURE 37. Post-Impact View of Propulsion Battery Component Intrusion

**Photograph Not Applicable**

**No Propulsion  
Battery Movement or  
Retention loss**

FIGURE 38. Post-Impact View of Propulsion Battery Module  
Movement or Retention Loss

Photograph Not Applicable

No Propulsion Battery  
Electrolyte Spillage

FIGURE 39. Post-Impact View of Propulsion Battery Electrolyte Spillage Location

Photograph Not Applicable

No Propulsion Battery  
Electrolyte Spillage

FIGURE 40. Post-Test View of Propulsion Battery Electrolyte Spillage Location