

REPORT NUMBER: NCAP-CAL-19-009

**NEW CAR ASSESSMENT PROGRAM (NCAP)
FRONTAL BARRIER IMPACT TEST**

**General Motors LLC
2019 Chevrolet Silverado 2500 Crew Cab
Truck**

NHTSA No: M20190114

**PREPARED BY:
CALSPAN CORPORATION
P.O. BOX 400
BUFFALO, NEW YORK 104625**



September 27, 2019

FINAL REPORT

**PREPARED FOR:
U. S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
OFFICE OF CRASHWORTHINESS STANDARDS
1200 NEW JERSEY AVE SE, ROOM W43-410
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Administration, in response to Contract Number DTNH22-12-D-00260.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof.

If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by:	 _____ Vince Paolini, Program Engineer	Date:	<u>September 27, 2019</u>
Approved by:	 _____ Vanessa Hansen, Operations Manager	Date:	<u>September 27, 2019</u>

FINAL REPORT ACCEPTANCE BY OCWS:

Division Chief, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

COTR, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

TECHNICAL REPORT DOCUMENTATION PAGE

1. Report No. NCAP-CAL-19-009		2. Government Accession No.		3. Recipient's Catalog No.																																																					
4. Title and Subtitle Final Report of New Car Assessment Program Frontal Impact Testing of a 2019 Chevrolet Silverado 2500 Crew Cab Truck NHTSA No.: M20190114				5. Report Date September 27, 2019																																																					
				6. Performing Organization Code CAL																																																					
7. Author(s) Vince Paolini, Project Engineer Vanessa Hansen, Operations Manager				8. Performing Organization Report No. CAL-DOT-2019-009																																																					
9. Performing Organization Name and Address Calspan Corporation Transportation Test Operations P.O. Box 400 Buffalo, New York 104625				10. Work Unit No.																																																					
				11. Contract or Grant No. DTNH22-12-D-00260																																																					
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards (NRM-110) 1200 New Jersey Ave., SE, Room W43-410 Washington, D.C. 20590				13. Type of Report and Period Covered: Final Test Report July 18, 2019 - September 27, 2019																																																					
				14. Sponsoring Agency Code NRM-110																																																					
15. Supplementary Notes																																																									
16. Abstract A 56.30 km/h (35 mph), NCAP Frontal Impact Test was conducted on a 2019 Chevrolet Silverado 2500 Crew Cab Truck in accordance with the specifications of the Office of Crashworthiness Standards Frontal NCAP Laboratory Test Procedure. This test was conducted to obtain data indicant of FMVSS 208, 212, 219 (partial), 301, and foot well intrusion performance. The test was conducted at Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on July 18, 2019. The impact velocity of the vehicle was 56.34 km/h, and the ambient temperature at the barrier face at the time of impact was 21°C. The target vehicle's maximum post-test static crush was 675 mm at the vehicles centerline of the front bumper. The test vehicle's occupant performance data is as follows: <table border="1"> <thead> <tr> <th rowspan="2">Measurement Description</th> <th rowspan="2">Units</th> <th colspan="2">Driver ATD (Serial No. 142)</th> <th colspan="2">Passenger ATD (Serial No. 288)</th> </tr> <tr> <th>Threshold</th> <th>Result</th> <th>Threshold</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC₁₅)</td> <td></td> <td>700</td> <td>424.881</td> <td>700</td> <td>495.256</td> </tr> <tr> <td>Maximum Chest Compression</td> <td>mm</td> <td>63</td> <td>-25.551</td> <td>52</td> <td>-15.695</td> </tr> <tr> <td>Nij</td> <td></td> <td>1</td> <td>0.259</td> <td>1</td> <td>0.461</td> </tr> <tr> <td>Neck Tension</td> <td>N</td> <td>4,170</td> <td>1640.199</td> <td>2,620</td> <td>848.885</td> </tr> <tr> <td>Neck Compression</td> <td>N</td> <td>4,000</td> <td>-603.050</td> <td>2,520</td> <td>-685.788</td> </tr> <tr> <td>Left Femur Force</td> <td>N</td> <td>10,008</td> <td>-1674.484</td> <td>6,805</td> <td>-1286.794</td> </tr> <tr> <td>Right Femur Force</td> <td>N</td> <td>10,008</td> <td>-2495.485</td> <td>6,805</td> <td>-2097.458</td> </tr> </tbody> </table>						Measurement Description	Units	Driver ATD (Serial No. 142)		Passenger ATD (Serial No. 288)		Threshold	Result	Threshold	Result	Head Injury Criteria (HIC ₁₅)		700	424.881	700	495.256	Maximum Chest Compression	mm	63	-25.551	52	-15.695	Nij		1	0.259	1	0.461	Neck Tension	N	4,170	1640.199	2,620	848.885	Neck Compression	N	4,000	-603.050	2,520	-685.788	Left Femur Force	N	10,008	-1674.484	6,805	-1286.794	Right Femur Force	N	10,008	-2495.485	6,805	-2097.458
Measurement Description	Units	Driver ATD (Serial No. 142)		Passenger ATD (Serial No. 288)																																																					
		Threshold	Result	Threshold	Result																																																				
Head Injury Criteria (HIC ₁₅)		700	424.881	700	495.256																																																				
Maximum Chest Compression	mm	63	-25.551	52	-15.695																																																				
Nij		1	0.259	1	0.461																																																				
Neck Tension	N	4,170	1640.199	2,620	848.885																																																				
Neck Compression	N	4,000	-603.050	2,520	-685.788																																																				
Left Femur Force	N	10,008	-1674.484	6,805	-1286.794																																																				
Right Femur Force	N	10,008	-2495.485	6,805	-2097.458																																																				
17. Key Words 35 mph Frontal Barrier Impact Test New Car Assessment Program (NCAP)				18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division, NPO-411 1200 New Jersey Ave, SE Washington, DC 20590																																																					
19. Security Class. (of this report) UNCLASSIFIED		20. Security Class. (of this page) UNCLASSIFIED		21. No. of Pages 161	22. Price																																																				

Form DOT F1700.7 (8-69)

TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
1	Purpose and Summary of the Test	1-1
2	Occupant and Vehicle Information / Data Sheets	2-1
<u>Data Sheet</u>		<u>Page</u>
1	General Test and Vehicle Parameter Data	2-2
2	Seat Adjustment, Fuel System, and Steering Wheel Data	2-6
3	Dummy Longitudinal Clearance Dimensions	2-8
4	Dummy Lateral Clearance Dimensions	2-9
5	Seat Belt Positioning Data	2-10
6	High-Speed Camera Locations and Data	2-11
7	Vehicle Accelerometer Locations	2-13
8	Photographic Reference Target Locations	2-14
9	Load Cell Locations on Fixed Barrier	2-15
10	Test Vehicle Summary of Results	2-16
11	Post-Test Observations	2-17
12	Vehicle Profile Measurements	2-18
13	Accident Investigation Division Data	2-20
14	Vehicle Intrusion Measurements	2-21
15	Summary of FMVSS 212, 219 (Partial), and 301 Data	2-23
16	FMVSS 301 Static Rollover Results	2-25
17	Dummy/Vehicle Temperature Stabilization Chart	2-26
<u>Appendix</u>		<u>Page</u>
A	Photographs	A-1
B	Dummy Response Data Traces	B-1
C	Dummy Calibration and Performance Verification Data	C-1

SECTION 1

PURPOSE AND SUMMARY OF TEST

PURPOSE

This 56.3 km/h frontal barrier impact test is part of the Vehicle Barrier Impact Testing Program sponsored by the National Highway Traffic Safety Administration (NHTSA) under Contract No. DTNH22-12-D-00260. The purpose of this test was to obtain vehicle crashworthiness and occupant restraint system performance data for consumer information purposes.

The 56.3 km/h frontal barrier impact test was conducted in accordance with the Office of Crashworthiness Standards Frontal NCAP Laboratory Test procedure, dated October 2015.

SUMMARY

A ridged fixed barrier was impacted by a 2019 Chevrolet Silverado 2500 Crew Cab Truck at a velocity of 56.34 km/h. The test was performed at Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on July 18, 2019. Pre- and post-test photographs of the vehicle and dummies to document the test can be found in Appendix A. One real-time camera and 14 high-speed cameras were used to document the frontal barrier impact event. Camera locations and other pertinent camera information can be found in Data Sheet 6 of this report.

One Part 572E, 50th percentile male anthropomorphic test device (ATD), was placed in the driver seating position and one Part 572O 5th percentile female ATD was placed in the right-front passenger seating position according to dummy placement instructions specified in the Frontal NCAP Laboratory Test Procedure. Both ATDs were fully instrumented with head, chest and pelvis tri-axial accelerometers, chest displacement potentiometers, upper neck transducers, right / left femur load cells, and lower leg instrumentation. The driver (position 1) ATD (Serial No. 142) and the right-front passenger (position 2) ATD (Serial No. 288) were calibrated previous to this test. Certification details, along with instrumentation calibration data, can be found in Appendix C of this report.

The 100 channels of data were recorded on an on-board data acquisition system. Please refer to Appendix B for the dummy response data traces.

There was 100 percent windshield retention and no intrusion into the protected zone of the windshield during the event. There was a total of 0.0 grams of stoddard solvent leakage after the event and including all phases of the static rollover. The maximum static crush of the test vehicle was 675 mm at the vehicles centerline. During and after the impact event, the driver's and passenger's side doors were closed and operational.

The driver's visible contact points were as follows: The driver's head contacted the frontal airbag and then the head restraint. The upper torso contacted the frontal airbag. Both knees contacted the knee bolster.

The passenger's visible contact points were as follows: The passenger's head contacted the frontal airbag and then the head restraint. The upper torso contacted the frontal airbag. Both knees contacted the glove box.

The occupant data is summarized below.

ATD Position	HIC ₁₅	Nij	Neck Tension (N)	Neck Comp. (N)	3ms Chest Clip (Gs)	Chest Disp. (mm)	Left Femur (N)	Right Femur (N)
Driver (50 th)	424.881	0.259	1640.199	-603.050	42.932	-25.551	-1674.484	-2495.485
Passenger (5 th)	495.256	0.461	848.885	-685.788	38.849	-15.695	-1286.794	-2097.458

GENERAL COMMENTS:

1. P1 (Driver) serial number - 142
2. P2 (Passenger) serial number - 288

Data Anomalies:

- Driver Right Lower Tibia Z Force, Questionable data after 13.8ms
- Driver Right Lower Tibia X Moment, Questionable data after 13.8ms
- Driver Right Lower Tibia Y Moment, Questionable data after 13.8ms

SECTION 2

OCCUPANT AND VEHICLE INFORMATION / DATA SHEETS

This section contains information reporting for the following Data Sheets:

Data Sheet No. 1 – General Test and Vehicle Parameter Data

Data Sheet No. 2 – Seat Adjustment, Fuel System, and Steering Wheel Data

Data Sheet No. 3 – Dummy Longitudinal Clearance Dimensions

Data Sheet No. 4 – Dummy Lateral Clearance Dimensions

Data Sheet No. 5 – Seat Belt Positioning Data

Data Sheet No. 6 – High-Speed Camera Locations and Data

Data Sheet No. 7 – Vehicle Accelerometer Locations

Data Sheet No. 8 – Photographic Reference Target Locations

Data Sheet No. 9 – Load Cell Locations on Fixed Barrier

Data Sheet No. 10 – Test Vehicle Summary of Results

Data Sheet No. 11 – Post-Test Observations

Data Sheet No. 12 – Vehicle Profile Measurements

Data Sheet No. 13 – Accident Investigation Division Data

Data Sheet No. 14 – Vehicle Intrusion Measurements

Data Sheet No. 15 – Summary of FMVSS 212, 219 (Partial), and 301 Data

Data Sheet No. 16 – FMVSS 301 Static Rollover Results

Data Sheet No. 17 – Dummy/Vehicle Temperature Stabilization Chart

DATA SHEET NO. 1
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190114
 Test Date: 7/18/2019

TEST VEHICLE INFORMATION AND OPTIONS

NHTSA No.	M20190114	Traction Control System (TCS)	Yes
Model Year	2019	Power Steering	Yes
Make	Chevrolet	Power Window Auto-Reverse	No
Model	Silverado 2500	Driver Frontal Airbag	Yes
Body Style	Crew Cab Truck	Driver Curtain Airbag	Yes
VIN	1GC1KSEG3KF272168	Driver Head/Torso Airbag	No
Body Color	Silver	Driver Torso Airbag	No
Odometer Reading (km /mi)	84 miles	Driver Torso/Pelvis Airbag	Yes
Engine Displacement (L)	6.0	Driver Pelvis Airbag	No
Type / No. Cylinders	V8	Driver Knee Airbag	No
Engine Placement	Inline	Front Pass. Frontal Airbag	Yes
Transmission Type	Automatic	Front Pass. Curtain Airbag	Yes
Transmission Speeds	6-Speed	Front Pass. Head/Torso Airbag	No
Overdrive	Yes	Front Pass. Torso Airbag	No
Final Drive	4x4	Front Pass. Torso/Pelvis Airbag	Yes
Roof Rack	No	Front Pass. Pelvis Airbag	No
Sunroof / T-Top	No	Front Pass. Knee Airbag	No
Running Boards	Yes	Driver Pretensioner	Yes
Tilt Steering Wheel	Yes	Driver Load Limiter	Yes
Power Seats	Yes	Front Pass. Pretensioner	Yes
Anti-Lock Brakes (ABS)	Yes	Front Pass. Load Limiter	Yes
Automatic Door Locks (ADLs)	Yes	Other	No

Does owner's manual provide instructions to turn off automatic door locks?

No

DATA FROM CERTIFICATION LABEL

Manufactured By	General Motors LLC	GVWR (kg)	4491
Date of Manufacture	04/19	GAWR Front (kg)	2540
		GAWR Rear (kg)	2812

VEHICLE SEATING AND WEIGHT CAPACITY DATA


Measured Parameter	Front	Rear	Third	Total
Type of Seats	Bucket	Bench	N/A	
Number of Occupants	3	3	N/A	6
Capacity Wt. (VCW) (kg)				1319
Cargo Wt. (RCLW) (kg)				136

DATA SHEET NO. 1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190114
Test Date: 7/18/2019

Collect items circled in red, tire manufacturer, and tire name.

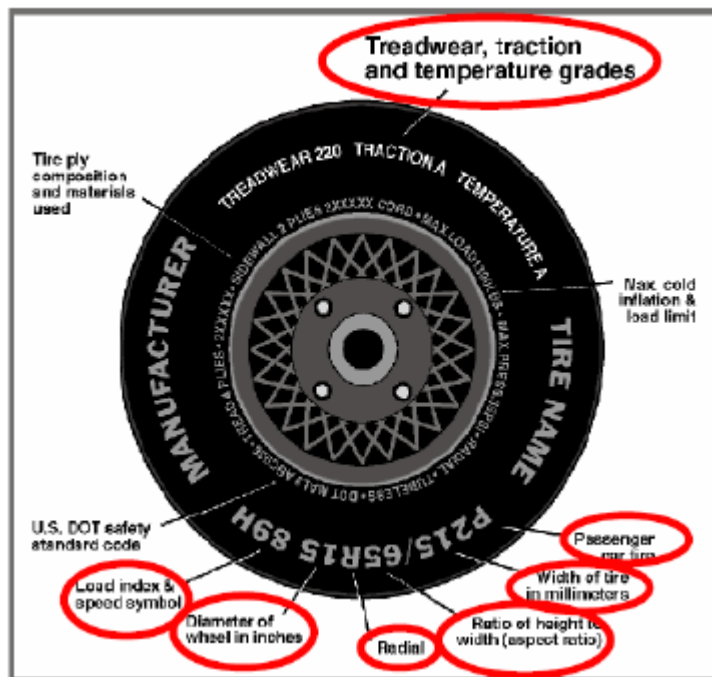

VEHICLE TIRE INFORMATION

Measured Parameter	Front	Rear
Maximum Tire Pressure (kPa)	550	550
Cold Pressure (kPa)	420	480
Recommended Tire Size	LT265/70R18ER	LT265/70R18ER
Tire Size on Vehicle	LT265/70R18	LT265/70R18
Tire Manufacturer	Michelin	Michelin
Tire Model	LTX	LTX
Treadwear	N/A	N/A
Traction	N/A	N/A
Temperature Grades	N/A	N/A
Tire Plies Sidewall	2 Polyester	2 Polyester
Tire Plies Body	2 Polyester, 1 Polyamide, 2 Steel	2 Polyester, 1 Polyamide, 2 Steel
Load Index / Speed Symbol	124/121R	LT265/70R18
Tire Material	Rubber	Rubber
DOT Safety Code Left	B3AC00JX1319	B3AC00JX1519
DOT Safety Code Right	B3AC00JX1319	B3AC00JX1519

DATA SHEET NO. 1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190114
 Test Date: 7/18/2019

TEST VEHICLE WEIGHTS

	Units	As Delivered Weights (UVW)			As Tested Weights (ATW)		
		Front Axle	Rear Axle	Total	Front Axle	Rear Axle	Total
Left	kg	932	659		994	729	
Right	kg	876	676		943	748	
Ratio	%	57.5	42.5		57	43	
Totals	kg	1808	1335	3143	1937	1477	3414

TARGET TEST WEIGHT CALCULATION

Measured Parameter	Units	Value	
Total Delivered Weight (UVW)	kg	3143	(A)
Weight of 1 P572E ATD & 1 P572O ATD	kg	142	(B)
Rated Cargo / Luggage Weight (RCLW)	kg	136	(C)
Calculated Vehicle Target Weight (TVTW)	kg	3421	(A+B+C)

TEST VEHICLE ATTITUDES AND CG

Condition	Units	LF	RF	LR	RR	CG (aft of front axle)
As Delivered	mm	1031	1029	1111	1106	1812
As Tested	mm	1024	1021	1100	1090	1845
Post-Test	mm	990	1025	1088	1115	

GENERAL TEST VEHICLE DATA

Measurement Description	Units	Value
Total Vehicle Wheel Base	mm	4265
Total Vehicle Length at Left Side	mm	6517
Total Vehicle Length at Centerline	mm	6552
Total Vehicle Length at Right Side	mm	6517
Weight of Ballast in Cargo Area	kg	63
Weight of Vehicle Components Removed	kg	0
Amount of Stoddard Solvent in Fuel Tank	L	126.8

LIST OF COMPONENTS REMOVED TO MEET TEST WEIGHT:

None

DATA SHEET NO.1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190114
 Test Date: 7/18/2019

TARGET VEHICLE STRUCTURAL MEASUREMENT

No.	Description	Pre-Test
1	Total Length	6552
2	Total Width	2001
3*	Bumper Top Height	803
4*	Bumper Bottom Height	533
5*	Longitudinal Member Top Height	677
6	Distance Between Longitudinal Members	932
7	Longitudinal Member Width	60
8*	Engine Top Height	1193
9*	Engine Bottom Height	365
10	Engine and Gearbox Width	511
11	Front Bumper-Engine Distance	885
12*	Front Shock Absorber Fixing Height	795
13*	Bonnet Leading Edge Height	1270
14	Front Shock Absorber Fixing Width	997
15	Front Bumper – Front Axle Distance	991
16	Front Axle – A Pillar Distance	581
17	A-Pillar – B-Pillar Distance	1140
18	B-Pillar – Rear Axle Distance	2543
19	B-Pillar – C-Pillar Distance	1007
20*	Roof Sill Bottom Height	1839
21*	Roof Sill Top Height	1912
22*	Floor Sill Bottom Height	650
23*	Floor Sill Top Height	656

*Height Measurements are taken from the ground
 Note: All measurements are in millimeters


DATA SHEET NO. 2 SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190114
Test Date: 7/18/2019

NOMINAL DESIGN RIDING POSITION

The driver's seat back was set to the manufacturer's designated angle. The passenger's seat back was positioned in a similar manner as the driver's seat back. Seat back angles are measured at the headrest post bezel using a digital inclinometer.

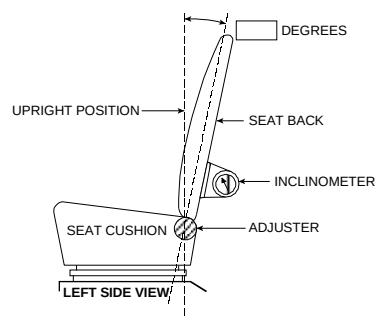

FRONT SEAT ASSEMBLY

SEAT FORE / AFT POSITIONS


The driver's seat was positioned at the mid-point of fore/aft travel at its lowest position. The passenger's seat was positioned at the most forward position of fore/aft travel. Zero is defined as the forward most position.

Seating Position	Total Fore / Aft Travel	Placed in Position #
Driver Seat	338	169
Passenger Seat	22 (0-21)	0

SEAT BELT UPPER ANCHORAGE

The driver's seat belt anchorage was positioned according to the manufacturer's designated positioning for a 50th percentile adult male ATD. The passenger's seat belt anchorage was positioned according to the manufacturer's designated positioning for a 5th percentile adult female ATD. For this test zero is defined as the uppermost position.

Seating Position	Total # of Positions	Placed in Position #
Driver Seat	5	Uppermost
Passenger Seat	5	Uppermost

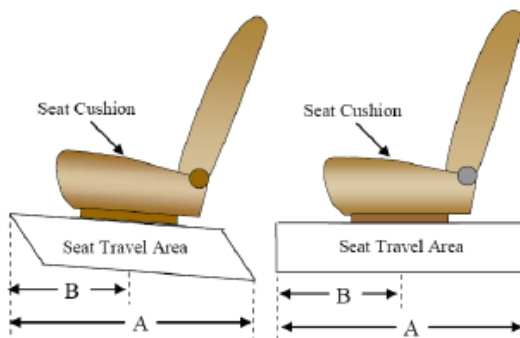

DATA SHEET NO. 2 ... (CONTINUED)
SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
 Test Program: NCAP Frontal Barrier Impact Test


NHTSA No.: M20190114
 Test Date: 7/18/2019

FUEL TANK CAPACITY

Description	Liters
Usable Capacity of "Standard Tank"	136.3
Usable Capacity of "Optional Tank"	N/A
92%-94% of Usable Capacity	125.4 – 128.1
Actual Amount of Solvent Used	126.8
1/3 of Usable Capacity	45.4


FUEL PUMP

The vehicle is equipped with an electric fuel pump. The fuel filler neck is on the left side of the vehicle. The pump creates positive pressure in the fuel lines, pushing the gasoline to the engine. See form 1 for more information.

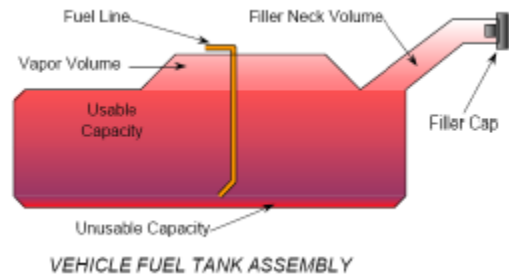

STEERING COLUMN ADJUSTMENT

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes when moved through its full range of motion. For angular measurements, a digital inclinometer was used to measure a plate which was placed across the steering wheel rim. A tape measure was used to measure the telescoping steering wheel travel.

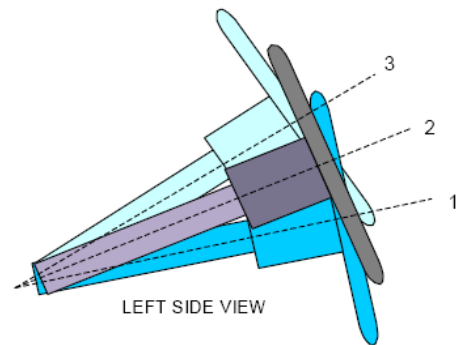


STEERING COLUMN POSITIONS

Description	Degrees	Fore / Aft Position (mm)
Lowermost position No. 1	11.0	
Geometric center position No. 2	20.8	
Uppermost position No. 3	33.4	
Telescoping Steering Wheel Travel		42
Test Position	20.8	21

DATA SHEET NO. 3
DUMMY LONGITUDINAL CLEARANCE DIMENSIONS

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190114
 Test Date: 7/18/2019

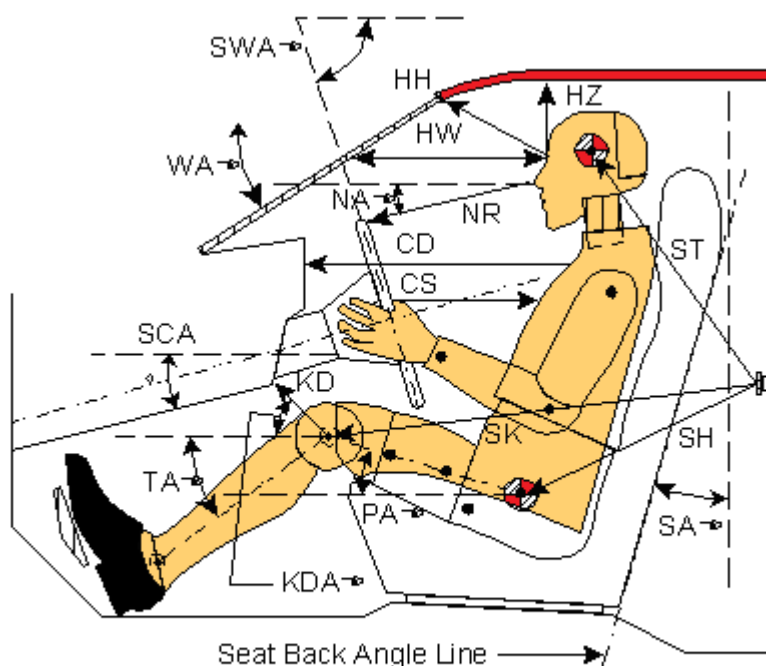


Left Side View

Code	Measurement Description	Driver (SN: 142)		Passenger (SN: 288)	
		Length (mm)	Angle (°)	Length (mm)	Angle (°)
WA°	Windshield Angle		33.9		
SWA°	Steering Wheel Angle		21.9		
SCA°	Steering Column Angle		68.1		
SA°	Seat Back Angle (on headrest post)		4.0		5.5
HZ	Head to Roof (Z)	310	90	352	90
HH	Head to Header	495	22.8	466	31.7
HW	Head to Windshield	816	0	778	0
NR	Nose to Rim	397	2.3	493	22.3
CD	Chest to Dash	572		445	
CS	Chest to Steering Hub	320	4.2		
RA	Rim to Abdomen	215	8.2		
KDL	Left Knee to Dash	185	20.9	152	34.6
KDR	Right Knee to Dash	187	24.3	150	34.8
PA°	Pelvic Angle		22.8		19.9
TA°	Tibia Angle		30.6		54.2
SK	Striker to Knee	584	5.0	642	2.0
ST	Striker to Head	581	78.3	492	73.7
SH	Striker to H-Point	257	4.3	322	2.7

DATA SHEET NO. 4
DUMMY LATERAL CLEARANCE DIMENSIONS

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190114
 Test Date: 7/18/2019

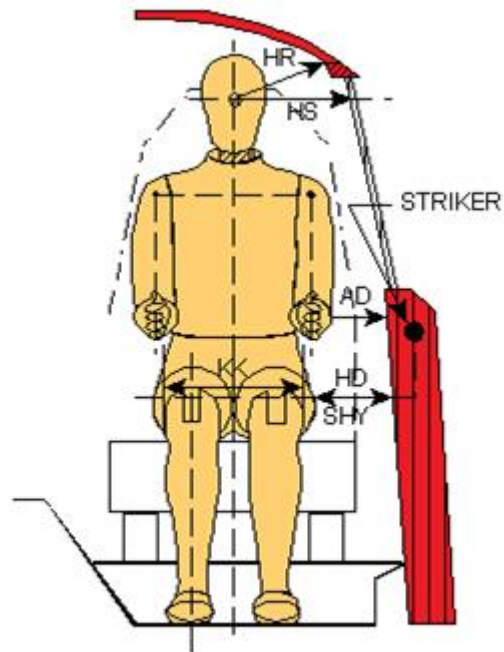


Front View

Code	Description	Driver (mm)	Passenger (mm)
AD	Arm to Door	80	89
HD	H-Point to Door	154	162
HR	Head to Side Header	292	348
HS	Head to Side Window	347	360
KK	Knee to Knee	375	232
SHY	Striker to H-Point (Y Direction)	245	287
AA	Ankle to Ankle	365	163

DATA SHEET NO. 5
SEAT BELT POSITIONING DATA

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190114
Test Date: 7/18/2019

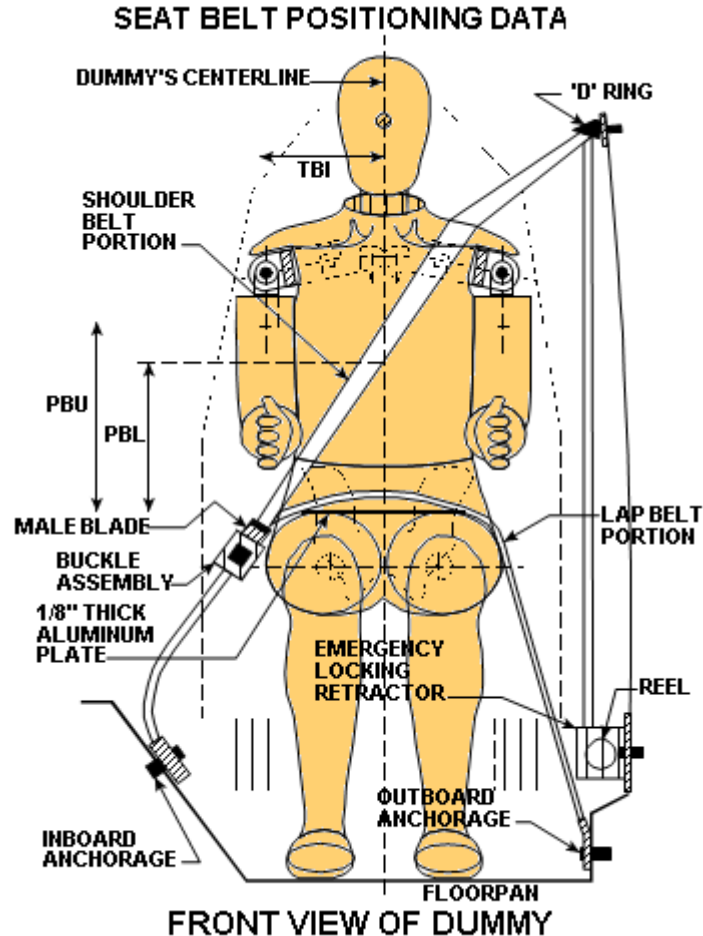

SEAT BELT POSITIONING MEASUREMENTS

Measurement Description	Units	Driver	Passenger
PBU — Top surface of reference to belt upper edge	mm	308	261
PBL — Top surface of reference to belt lower edge	mm	205	156

BELT LENGTH DATA


Measurement Description	Units	Driver	Passenger
Shoulder belt length as measured on ATD	mm	840	837
Lap Belt Length as measured on ATD	mm	538	515
Remainder of belt on reel	mm	1022	1088
Total belt length for continuous webbing systems	mm	2400	2440

DATA SHEET NO. 6
HIGH-SPEED CAMERA LOCATIONS AND DATA

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190114
Test Date: 7/18/2019

CAMERA POSITIONS FOR FRONTAL IMPACTS

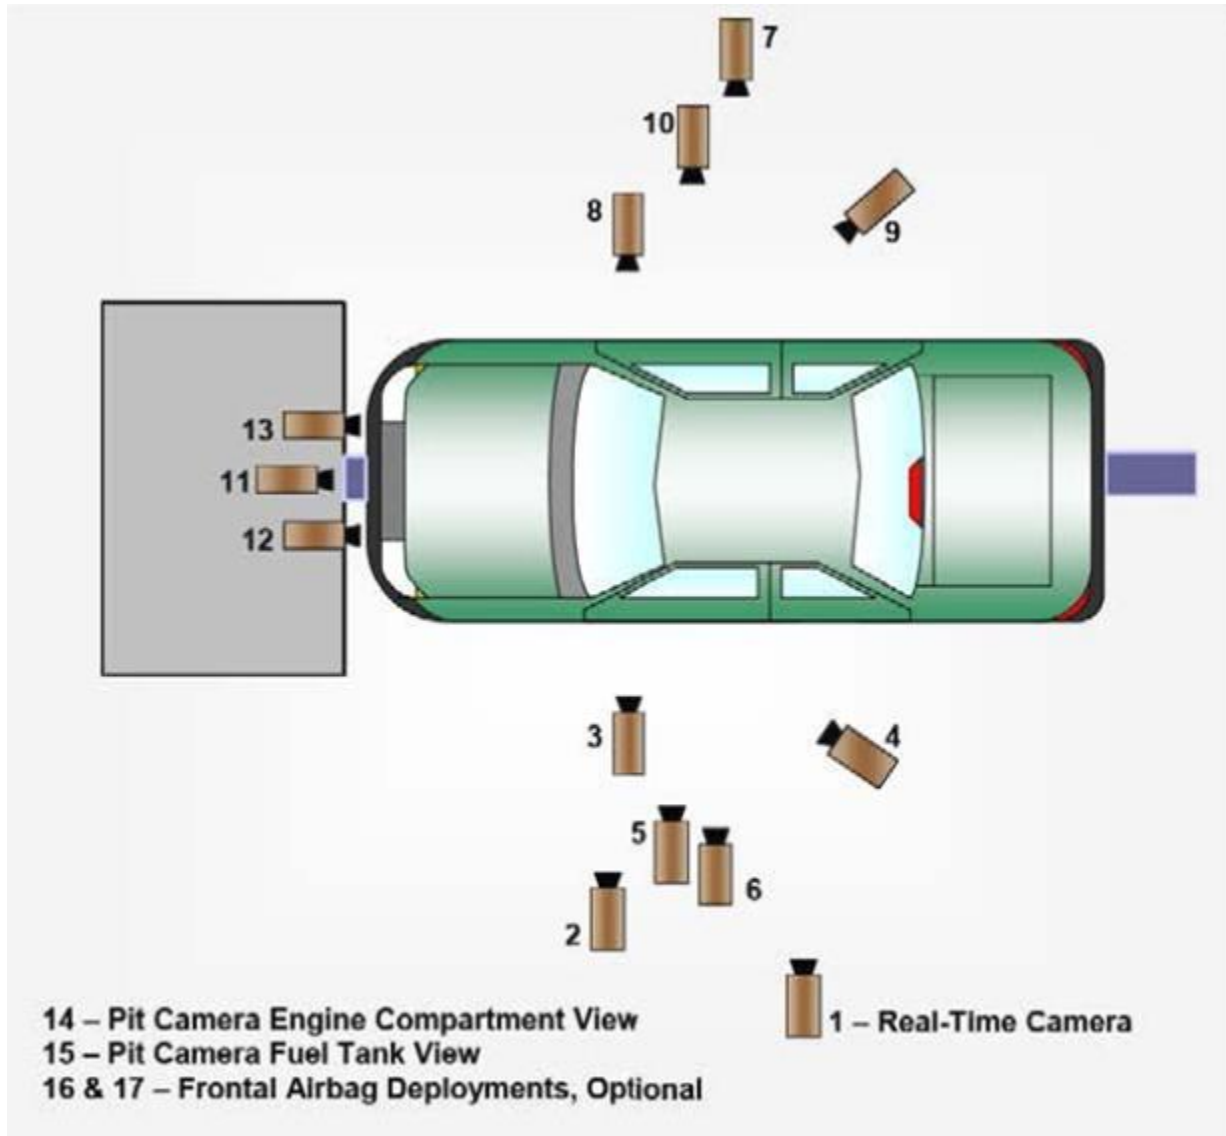

Top View

DATA SHEET NO. 6 ... (CONTINUED)
HIGH-SPEED CAMERA LOCATIONS AND DATA

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190114
 Test Date: 7/18/2019

CAMERA LOCATIONS


No.	Camera View	Location (mm)			Lens (mm)	Speed (fps)
		X	Y	Z		
1	Real-Time Left Overall	-	-	-		60
2	Driver Close-Up	-1901	-7103	-1562	50	1000
3	Left Front Half	-1535	-7131	-1331	28	1000
4	Left Angle	-3738	-4814	-2179	28	1000
5	Steering Column - Top					
6	Steering Column - Bottom					
7	Right Overall	-3116	9442	-1233	24	1000
8	Passenger Close-Up	-2046	7333	-1559	50	1000
9	Right Front Half	-1483	7342	-1411	28	1000
10	Right Angle	-3595	4740	-2228	28	1000
11	Windshield	200	0	-3471	12.5	1000
12	Driver Windshield	-250	-370	-2236	12.5	1000
13	Passenger Windshield	-250	370	-2236	12.5	1000
14	Pit Front	-1119	0	2473	12.5	1000
15	Pit Rear	-3594	0	2393	12.5	1000
16	Onboard Driver Airbag (Optional)				8	1000
17	Onboard Passenger Airbag (Optional)				8	1000

* COORDINATES: +X = forward of impact plane
 +Y = right of monorail center
 +Z = into ground

DATA SHEET NO. 7 **VEHICLE ACCELEROMETER LOCATIONS**

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190114
 Test Date: 7/18/2019

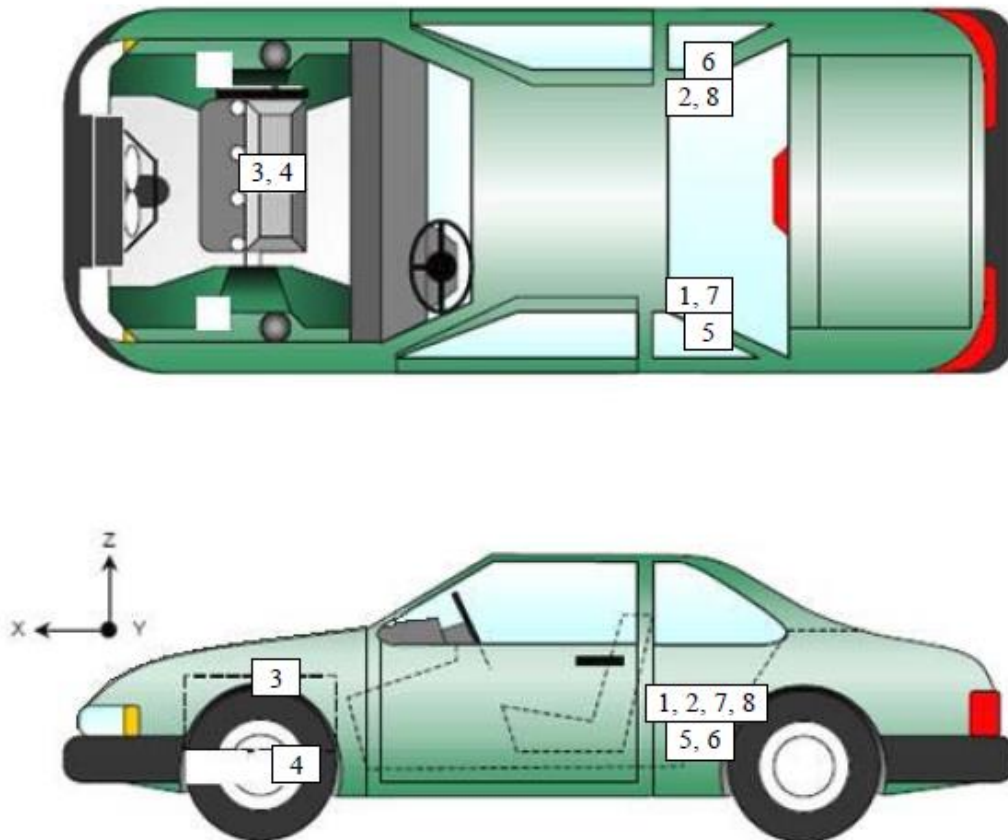

VEHICLE ACCELEROMETER PRE-TEST LOCATIONS

No.	Accelerometer Location	Measurements (mm)		
		X	Y	Z
1	Left Rear Accelerometer – X Direction	3441	-428	-55
2	Right Rear Accelerometer – X Direction	3418	393	-53
3	Engine Top X	5697	64	-528
4	Engine Bottom X	5668	47	125
5	Left Rear Accelerometer – Z Direction	3441	-428	-55
6	Right Rear Accelerometer – Z Direction	3418	393	-53
7	Left Rear Accelerometer – X Direction Redundant	3432	-427	-55
8	Right Rear Accelerometer – X Direction Redundant	3417	383	-53

Reference Points: *X – Rear Surface of Vehicle (+ forward)*
 Y – Vehicle Centerline (+ to right)
 Z – Ground Plane (+ down)


DATA SHEET NO. 8
PHOTOGRAPHIC REFERENCE TARGET LOCATIONS

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190114
 Test Date: 7/18/2019

Item	Value
A	453
B	1001
C	2850
D	611
E	3091
F	199
G	1888
H	2846
I	1566
J	1055
K	1063
L	2868
M	2847
N	2856
O	1066
P	1066
Q	1564

All units in millimeters

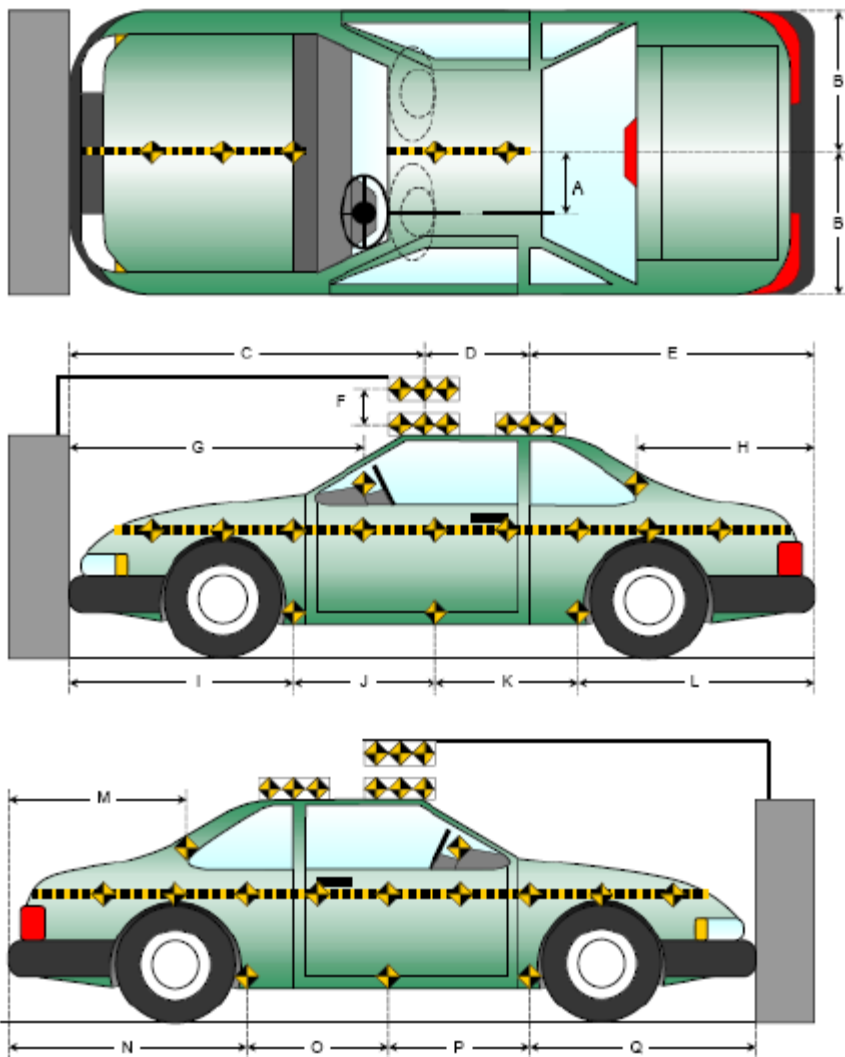

DATA SHEET NO. 9
LOAD CELL LOCATIONS ON FIXED BARRIER

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190114
Test Date: 7/18/2019

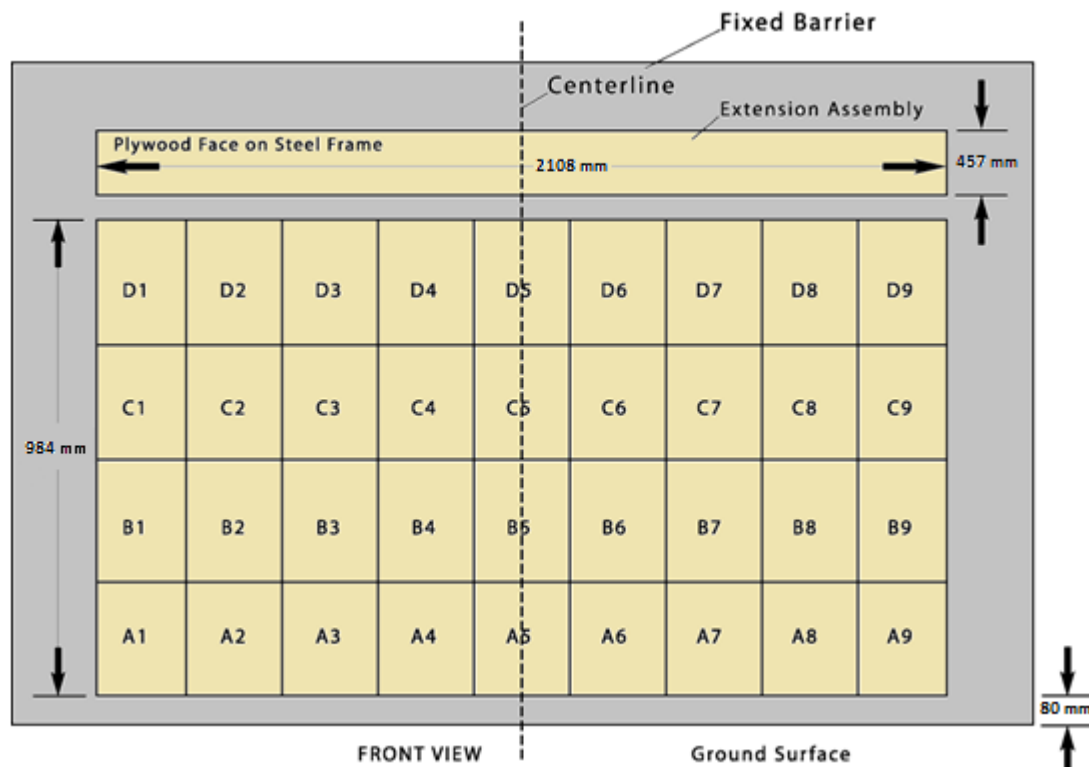


Figure 1 - * Load Cell Wall Not Used For Test

DATA SHEET NO. 10
TEST VEHICLE SUMMARY OF RESULTS

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190114
Test Date: 7/18/2019

INSTRUMENTATION

Instrumentation	Number of Channels Collected
Driver Dummy Accelerometers	46
Passenger Dummy Accelerometers	46
Vehicle Structure Accelerometers	8
Barrier	0
Total	100

CAMERA COVERAGE

Type of Camera	Number Used in this Test
High-Speed Vehicle Onboard	2
High-Speed Offboard	12
Real-Time Panning	1
Total	15

**DATA SHEET NO. 11
POST-TEST OBSERVATIONS**

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190114
Test Date: 7/18/2019

TEST DUMMY INFORMATION AND CONTACT LOCATIONS

Description	Driver	Passenger
Dummy Type / Serial No.	P572E 50 th Male / 142	P5720 5 th Female / 288
Head Contact	Front Airbag & Headrest	Front Airbag & Headrest
Upper Torso Contact	Front Airbag	Front Airbag
Lower Torso Contact	None	None
Left Knee Contact	Knee Bolster	Glove Box
Right Knee Contact	Knee Bolster	Glove Box

DOOR OPENING AND SEAT TRACK INFORMATION

Description	Driver	Passenger
Locked / Unlocked Doors	Unlocked	Unlocked
Front Door Opening	Closed & Operational	Closed & Operational
Rear Door Opening	Closed & Operational	Closed & Operational
Seat Track Shift (mm)	0	0
Seat Back Failure	No	No
Glazing Damage	None	None

POST-TEST STRUCTURAL OBSERVATIONS

Critical Areas of Performance	Observations and Conclusions
Windshield Damage	None
Window Damage	None
Other Notable Effects	None

VEHICLE REBOUND FROM BARRIER

Measured Parameter	Units	Value
Left Side	mm	495
Center	mm	496
Right Side	mm	488
Average	mm	493


SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION

Restraint Type	Driver		Passenger	
	Installed	Deployed	Installed	Deployed
Front Airbag	Yes	Yes	Yes	Yes
Side Airbag 1 - Curtain	Yes	Yes	Yes	Yes
Side Airbag 2 - Torso/Pelvis Airbag	Yes	No	Yes	No
Knee Airbag	No	N/A	No	N/A
Seat Belt Pretensioner	Yes	Yes	Yes	Yes
Seat Belt Load Limiter	Yes	Yes	Yes	Yes
Other				

DATA SHEET NO. 12
VEHICLE PROFILE MEASUREMENTS

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190114
Test Date: 7/18/2019

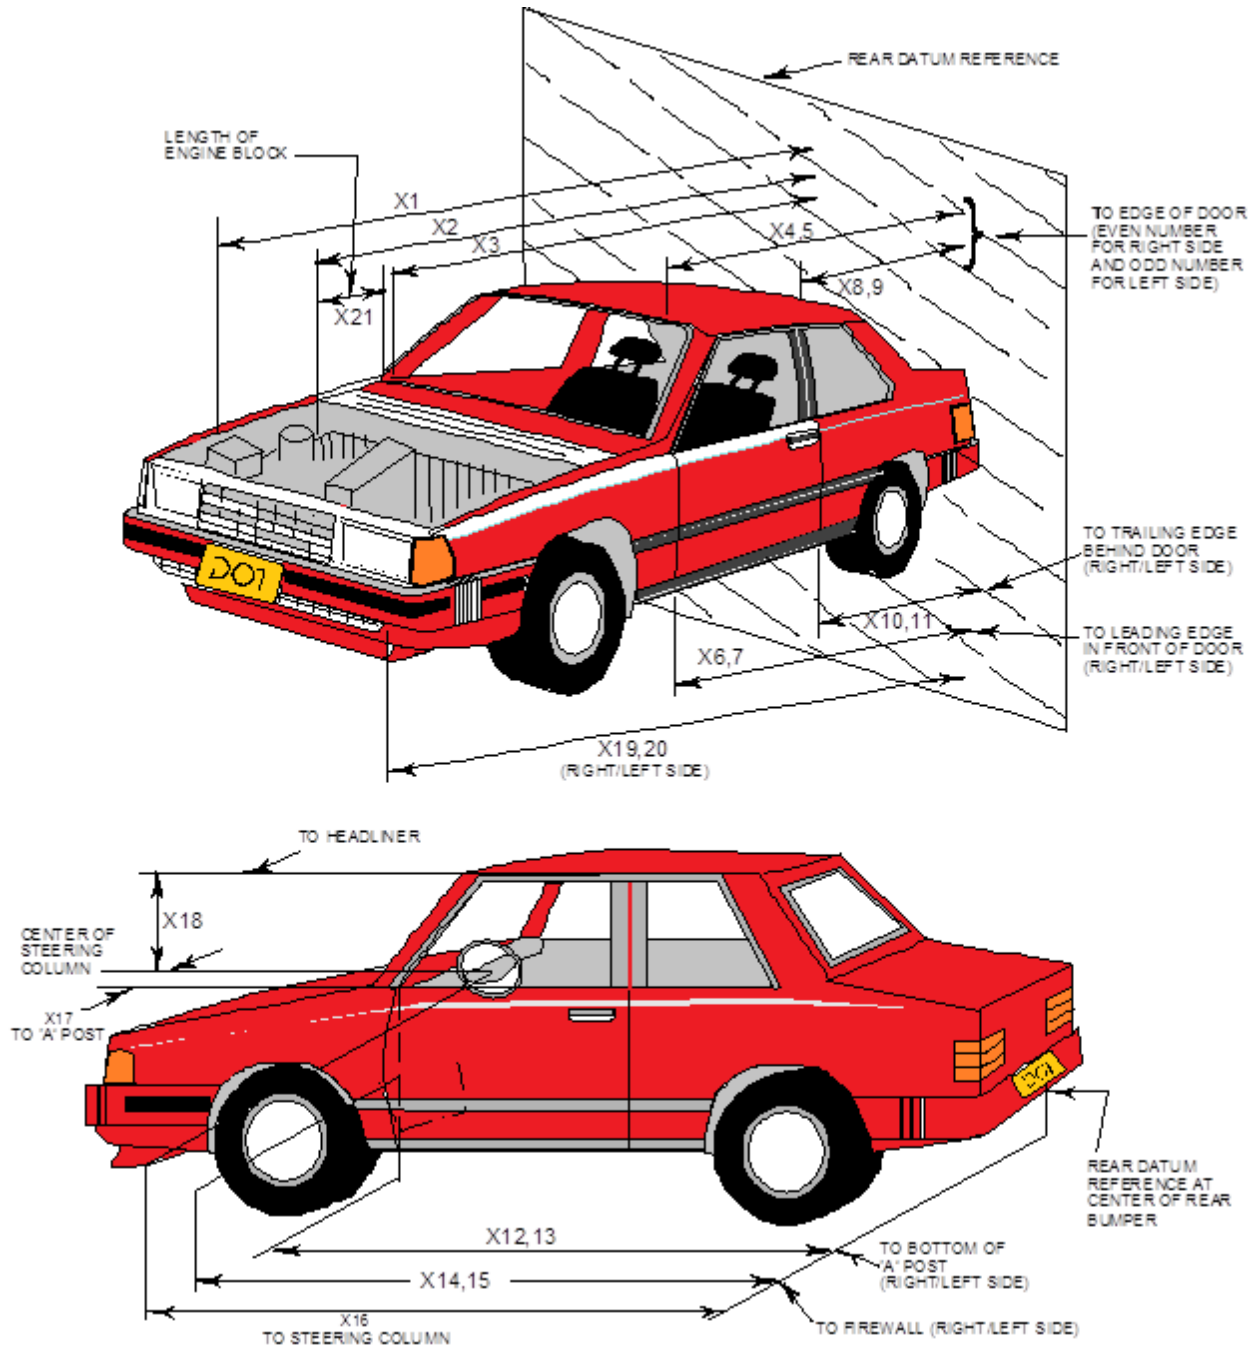

DATA SHEET NO. 12 ... (CONTINUED)
VEHICLE PROFILE MEASUREMENTS

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190114
 Test Date: 7/18/2019

No.	Measurement Description	Pre-Test	Post-Test	Difference
1	Total Length of Vehicle at Centerline	6552	5877	-675
2	Rear Surface of Vehicle (RSOV) to Front of Engine	5667	5511	-156
3	RSOV to Firewall	5352	5304	-48
4	RSOV to Upper Leading Edge of Right Door	4990	4964	-26
5	RSOV to Upper Leading Edge of Left Door	4989	4961	-28
6	RSOV to Lower Leading Edge of Right Door	4924	4908	-16
7	RSOV to Lower Leading Edge of Left Door	4922	4896	-26
8	RSOV to Upper Trailing Edge of Right Door	3841	3814	-27
9	RSOV to Upper Trailing Edge of Left Door	3842	3813	-29
10	RSOV to Lower Trailing Edge of Right Door	3810	3804	-6
11	RSOV to Lower Trailing Edge of Left Door	3811	3797	-14
12	RSOV to Bottom of "A" Post of Right Side	5043	5021	-22
13	RSOV to Bottom of "A" Post of Left Side	5041	5014	-27
14	RSOV to Firewall, Right Side	5307	5251	-56
15	RSOV to Firewall, Left Side	5303	5267	-36
16	RSOV to Steering Column	4460	4450	-10
17	Center of Steering Column to "A" Post	301	302	1
18	Center of Steering Column to Headliner	437	461	24
19	RSOV to Right Side of Front Bumper	6505	5924	-581
20	RSOV to Left Side of Front Bumper	6506	5915	-591
21	Length of Engine Block	371	371	0
RD	RSOV to Right Side of Dash Panel	4630	4607	-23
CD	RSOV to Center of Dash Panel	4619	4588	-31
LD	RSOV to Left Side of Dash Panel	4630	4607	-23

*UR= Unrecoverable data point
 All Dimensions in mm

DATA SHEET NO. 13
ACCIDENT INVESTIGATION DIVISION DATA

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190114
Test Date: 7/18/2019


VEHICLE INFORMATION

VIN: 1GC1KSEG3KF272168
Vehicle Size Category: Truck

Wheelbase (mm): 4,265
Test Weight (kg): 3,414

ACCELEROMETER DATA

Accelerometer Locations: Please See Data Sheet No. 7
Cal. Procedure / Interval: Calspan Procedure / 6 month
Integration Algorithm: Trapezoidal
Linearity: > 99%
Impact Velocity (km/h): 56.34
Velocity Change (km/h): 64.43
Time of Separation (ms): 169

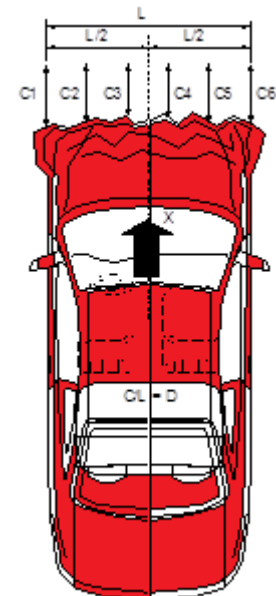

CRUSH PROFILE

Collision Deformation Classification: 12FDEW3
Midpoint of Damage: C3
Damage Region Length (mm): 1611
Impact Mode: Frontal

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
C1	Crush Zone 1 at Left Side	mm	6413	5895	518
C2	Crush Zone 2 at Left Side	mm	6507	5915	592
C3	Crush Zone 3 at Left Side	mm	6542	5897	645
C4	Crush Zone 4 at Right Side	mm	6543	5900	643
C5	Crush Zone 5 at Right Side	mm	6508	5922	586
C6	Crush Zone 6 at Right Side	mm	6412	5909	503
L	C1 to C6	mm	1611	1625	-14

DATA SHEET NO. 14
VEHICLE INTRUSION MEASUREMENTS

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
Test Program: NCAP Frontal Barrier Impact Test


NHTSA No.: M20190114
Test Date: 7/18/2019

DOOR OPENING WIDTH

Item	Description	Units	Pre-Test	Post-Test	Difference
A	Left Side Upper	mm	1034	1033	-1
B	Left Side Lower	mm	948	947	-1
D	Right Side Upper	mm	1035	1034	-1
E	Right Side Lower	mm	951	951	0

WHEELBASE MEASUREMENTS

Item	Description	Units	Pre-Test	Post-Test	Difference
C	Left Side Wheelbase	mm	4265	4129	-136
F	Right Side Wheelbase	mm	4265	4142	-123

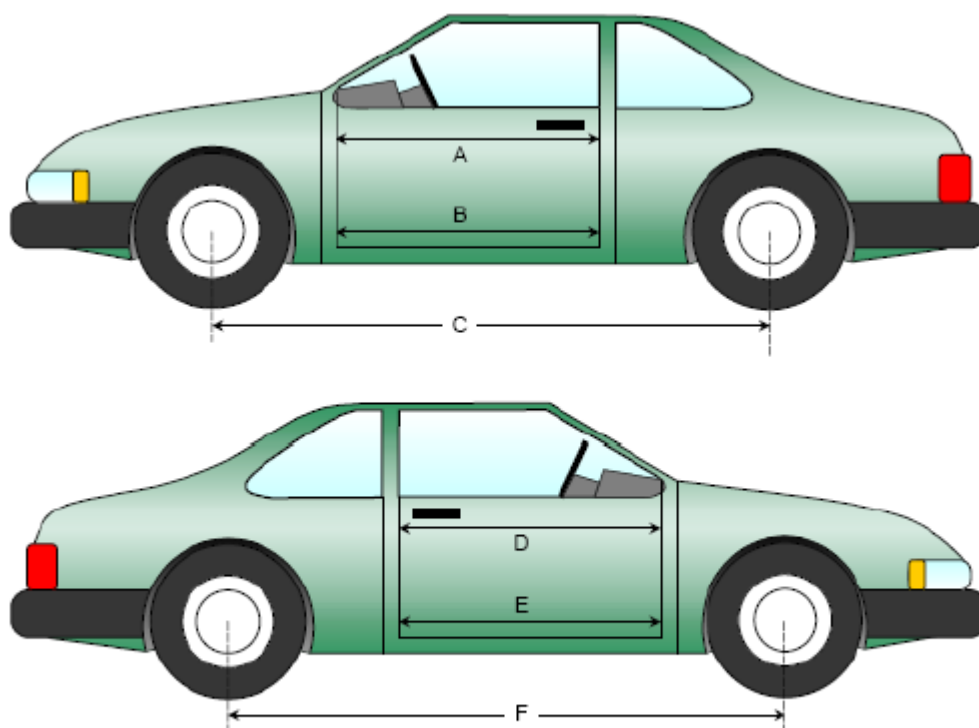

Left & Right Side Views

DATA SHEET NO.14 ... (CONTINUED)
VEHICLE INTRUSION MEASUREMENTS


Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190114
 Test Date: 7/18/2019

DRIVER COMPARTMENT INTRUSION

Item	Description	Units	Pre-Test	Post-Test	Difference
AB	Door Opening (Inside Window Jam)	mm	734	735	1
CX	Left Knee Bolster to X	mm	334	284	-50
DX	Right Knee Bolster to X	mm	333	268	-65
EX	Brake Pedal to X	mm	551	584	33
FX	Foot Rest to X	mm	545	507	-38
GX	Center of Steering Column Wheel Hub to X	mm	82	51	-31

X = Front of Seat Track (Stationary)

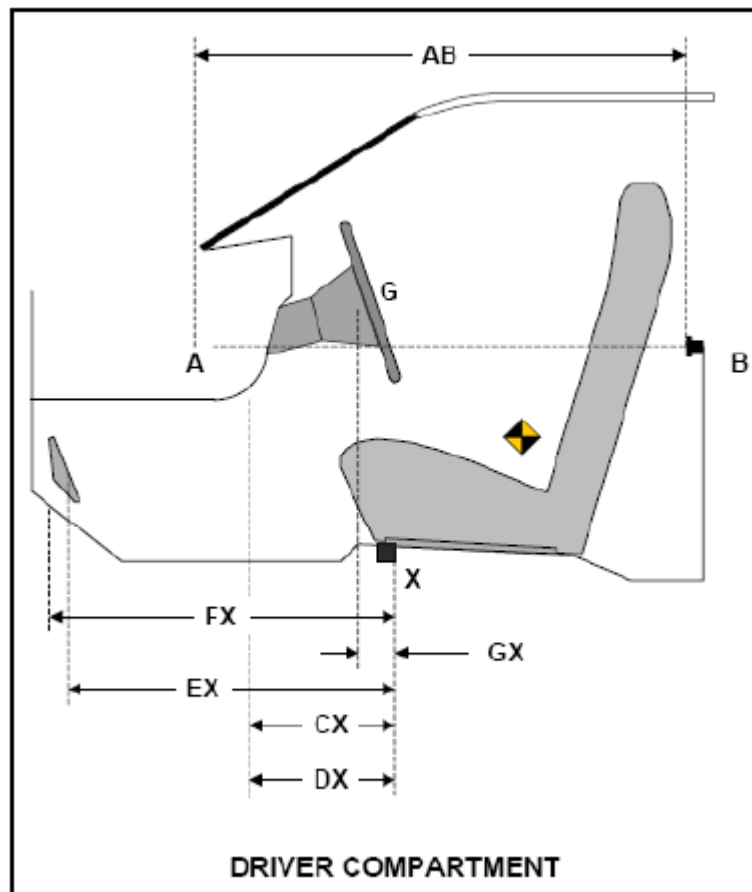

DATA SHEET NO. 15
SUMMARY OF FMVSS 212, 219 (PARTIAL), AND 301 DATA

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190114
 Test Date: 7/18/2019


Windshield Mounting Details: A 0.8 mm trim surrounds the top and side of windshield while a plastic shroud is on the bottom.

The standard requires that the post-test retention measurement be a minimum of 75% of the pre-test total periphery measurement for vehicles not equipped with occupant passive restraints and 50% for each side of the windshield for vehicles which are equipped with occupant passive restraints.

Temperature of windshield molding during test: 21° C

WINDSHIELD PERIPHERY MEASUREMENTS

Measurement	Pre-Test (mm)	Post-Test (mm)	% Retention
Left Side	2272	2272	100
Right Side	2272	2272	100
Total	4544	4544	100

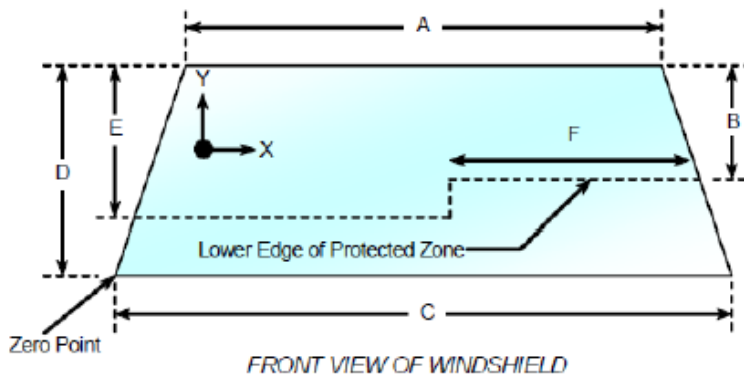

Item	Units	Value
A	mm	1382
B	mm	385
C	mm	1635
D	mm	765
E	mm	415
F	mm	645

AREAS OF PROTECTED ZONE FAILURES

A. *Provide coordinates of the area that the protected zone was penetrated more than .25 inches by a vehicle component other than one that is normally in contact with the windshield.*

- No Penetration

X	Y

B. *Provide coordinates of the area beneath the protected zone that the inner surface of the windshield was penetrated by a vehicle component.*

- No Penetration

X	Y

DATA SHEET NO. 15 ... (CONTINUED)
SUMMARY OF FMVSS 212, 219 (PARTIAL), AND 301 DATA

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190114
Test Date: 7/18/2019

FMVSS 301 FUEL SYSTEM INTEGRITY POST IMPACT DATA

Temperature at Time of Impact: 21 ° C

Test Time: 11:40 AM


STODDARD SOLVENT SPILLAGE MEASUREMENTS

- A. From impact until vehicle motion ceases: 0 oz.
(Maximum allowable is 1 oz.)
- B. For the 5-minute period after motion ceases: 0 oz.
(Maximum allowable is 5 oz.)
- C. For the following 25 minutes: 0 oz.
(Maximum allowable is 1 oz./minute)
- D. Spillage: No Spillage Occurred

DATA SHEET NO. 16
FMVSS 301 STATIC ROLLOVER RESULTS

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190114
 Test Date: 7/18/2019

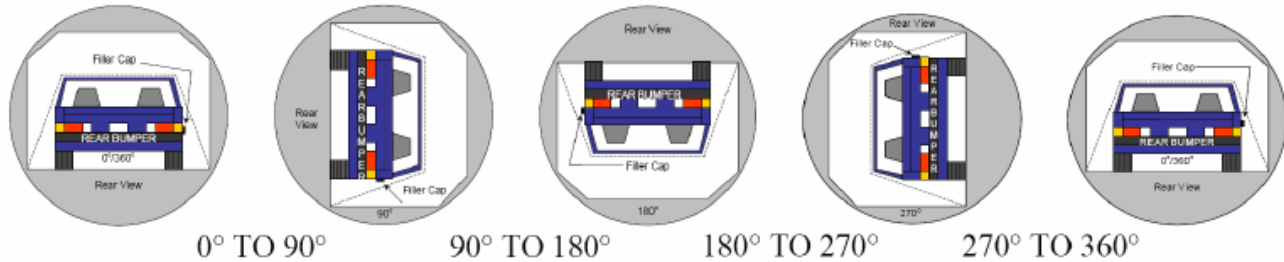

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.
2. The position hold time at each position is 300 seconds (minimum).
3. Details of Stoddard Solvent Spillage: No Spillage Occurred

SOLVENT COLLECTION TIME TABLE IN SECONDS

Test Phase	Rotation Time	Hold Time	Total Time
0° to 90°	68	300	368
90° to 180°	63	300	363
180° to 270°	66	300	366
270° to 360°	66	300	366

FMVSS 301 SPILLAGE TABLE

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° to 90°	0	0	0	
90° to 180°	0	0	0	
180° to 270°	0	0	0	
270° to 360°	0	0	0	


SOLVENT SPILLAGE LOCATION TABLE

Test Phase	Spillage Location
0° to 90°	None
90° to 180°	None
180° to 270°	None
270° to 360°	None

DATA SHEET NO. 17
DUMMY / VEHICLE TEMPERATURE STABILIZATION CHART

Test Vehicle: 2019 Chevrolet Silverado 2500 Crew Cab Truck
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20190114
Test Date: 7/18/2019

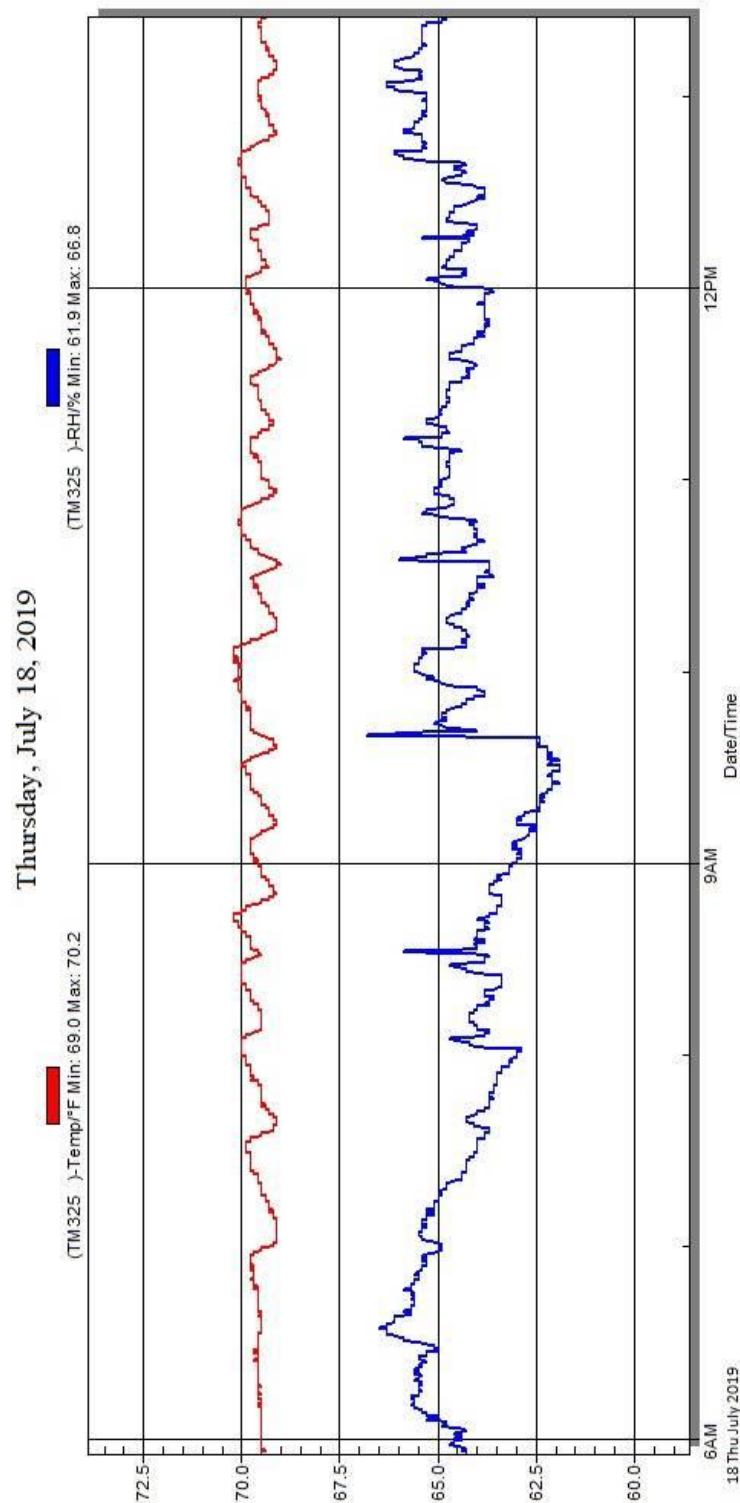

Temperature and Humidity Stabilization Chart/Data for Dummies and Test Vehicle

APPENDIX A
PHOTOGRAPHS

TABLE OF PHOTOGRAPHS

Fig.	Description	Page
1	Load Cell Location	A-5
2	Pre-Test Load Cell Wall	A-5
3	Post-Test Load Cell Wall	A-6
4	Manufacturer's Label	A-6
5	Tire Placard	A-7
6	2019 Chevrolet Silverado 2500 Frontal As Delivered	A-7
7	Left Rear 3-4 View, as Received	A-8
8	Pre-Test Front View of Test Vehicle	A-8
9	Post-Test Front View of Test Vehicle	A-9
10	Pre-Test Left View of Test Vehicle	A-9
11	Post-Test Left View of Test Vehicle	A-10
12	Pre-Test Right View of Test Vehicle	A-10
13	Post-Test Right View of Test Vehicle	A-11
14	Pre-Test Right Front 3-4 View	A-11
15	Post-Test Right Front 3-4 View	A-12
16	Pre-Test Left Rear 3-4 View	A-12
17	Post-Test Left Rear 3-4 View	A-13
18	Pre-Test Windshield View	A-13
19	Post-Test Windshield View	A-14
20	Pre-Test Engine Compartment View	A-14
21	Post-Test Engine Compartment View	A-15
22	Pre-Test Fuel Filler Cap View	A-15
23	Post-Test Fuel Filler Cap View	A-16
24	Pre-Test Front Underbody View ¹	A-16
25	Post-Test Front Underbody View ¹	A-17
26	Pre-Test Rear Underbody View ¹	A-17
27	Post-Test Rear Underbody View ¹	A-18
28	Pre-Test Dummy Cable Routing	A-18
29	Post-Test Dummy Cable Routing	A-19
30	Pre-Test Driver Dummy Front View	A-19
31	Post-Test Driver Dummy Front View	A-20
32	Pre-Test Driver Dummy Window View	A-20
33	Post-Test Driver Dummy Window View	A-21
34	Pre-Test Driver Dummy and Vehicle Interior View	A-21
35	Post-Test Driver Dummy and Vehicle Interior View	A-22

Fig.	Description	Page
36	Pre-Test Driver's Seat Fore-Aft Markings	A-22
37	Post-Test Driver's Seat Fore-Aft Markings	A-23
38	Pre-Test View of Belt Anchorage for Driver Dummy	A-23
39	Post-Test View of Belt Anchorage for Driver Dummy	A-24
40	Pre-Test Driver Dummy Feet	A-24
41	Post-Test Driver Dummy Feet	A-25
42	Pre-Test Driver's Side Knee Bolster	A-25
43	Post-Test Driver's Side Knee Bolster	A-26
44	Pre-Test Driver's Side Floorpan	A-26
45	Post-Test Driver's Side Floorpan	A-27
46	Post-Test Driver Dummy Face	A-27
47	Post-Test Driver Dummy Contact With Airbag	A-28
48	Post-Test Driver Dummy Contact With Headrest	A-28
49	Pre-Test View of the Steering Wheel	A-29
50	Post-Test View of the Steering Wheel	A-29
51	Pre-Test Passenger Dummy Front View	A-30
52	Post-Test Passenger Dummy Front View	A-30
53	Pre-Test Passenger Dummy Window View	A-31
54	Post-Test Passenger Dummy Window View	A-31
55	Pre-Test Passenger Dummy and Vehicle Interior View	A-32
56	Post-Test Passenger Dummy and Vehicle Interior View	A-32
57	Pre-Test Passenger's Seat Fore-Aft Markings	A-33
58	Post-Test Passenger's Seat Fore-Aft Markings	A-33
59	Pre-Test View of Belt Anchorage for Passenger Dummy	A-34
60	Post-Test View of Belt Anchorage for Passenger Dummy	A-34
61	Pre-Test Passenger Dummy Feet	A-35
62	Post-Test Passenger Dummy Feet	A-35
63	Pre-Test Passenger's Side Knee Bolster	A-36
64	Post-Test Passenger's Side Knee Bolster	A-36
65	Pre-Test Passenger's Side Floorpan	A-37
66	Post-Test Passenger's Side Floorpan	A-37
67	Post-Test Passenger Dummy Face	A-38
68	Post-Test Passenger Dummy Contact With Airbag	A-38
69	Post-Test Passenger Dummy Contact With Headrest	A-39

Fig.	Description	Page
70	Photograph of Ballast Installed in Vehicle	A-39
71	Post-Test Stoddard Solvent Spillage Location View, if Required	A-40
72	Post-Test Speed Trap Read-Out	A-40
73	Vehicle at 0° on Static Rollover Device	A-41
74	Vehicle at 90° on Static Rollover Device	A-41
75	Vehicle at 180° on Static Rollover Device	A-42
76	Vehicle at 270° on Static Rollover Device	A-42
77	Vehicle at 360° on Static Rollover Device	A-43
78	2019 Chevrolet Silverado 2500 Frontal Impact Event	A-43
79	Monroney Label Photograph	A-44

¹**NOTE:** *The underbody views should include the following vehicle components: fuel pump, fuel lines, sender unit, fuel tank filler pipe and any other visible system components.*



Figure A-1: Load Cell Location

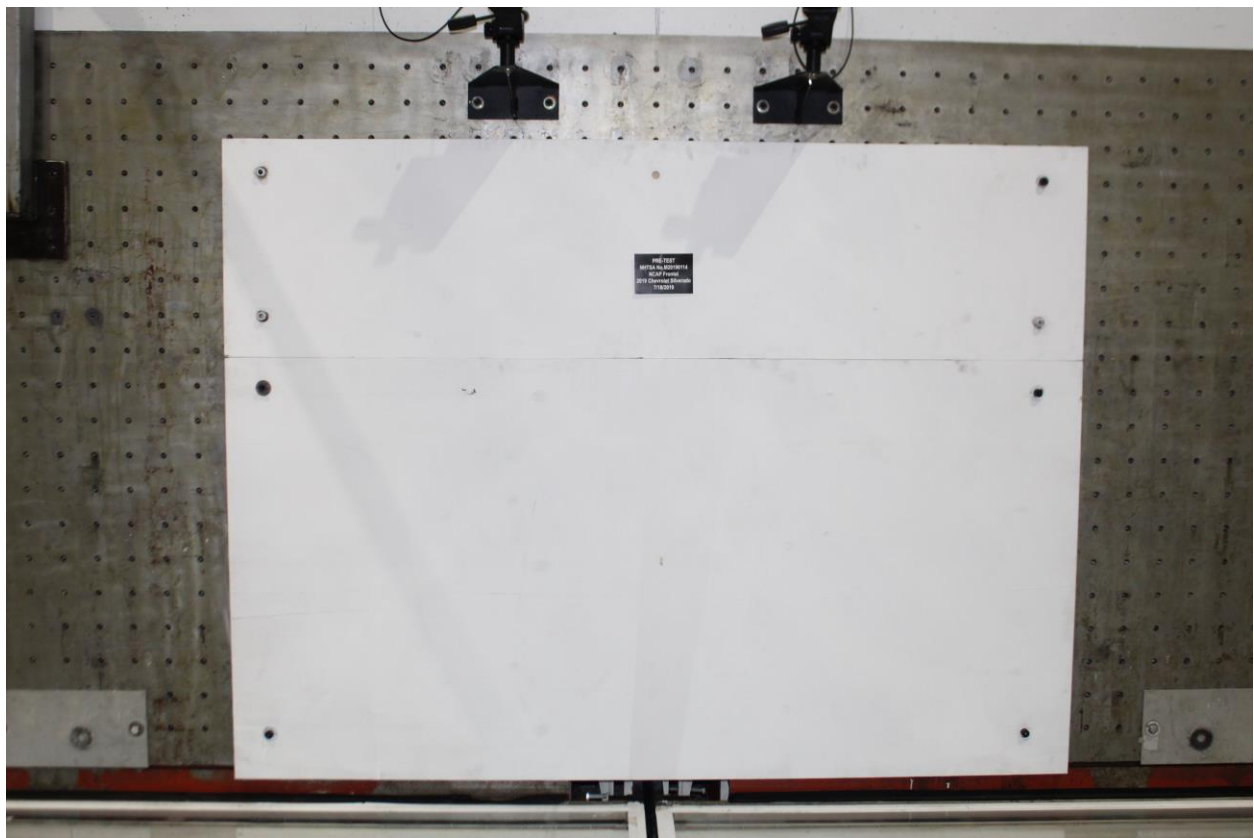


Figure A-2: Pre-Test Load Cell Wall



Figure A-3: Post-Test Load Cell Wall

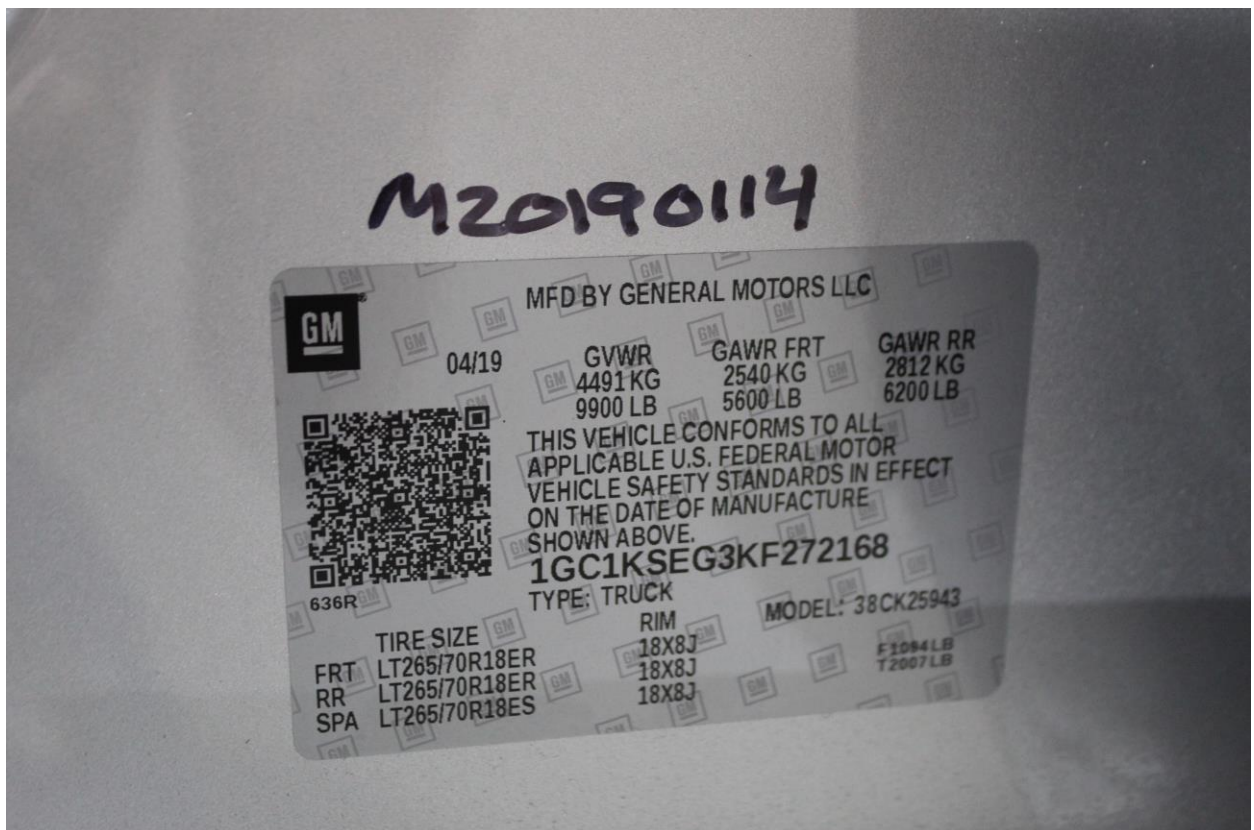


Figure A-4: Manufacturer's Label



Figure A-5: Tire Placard



M20190114

Figure A-6: 2019 Chevrolet Silverado 2500 Frontal As Delivered



M20190114

Figure A-7: Left Rear 3-4 View, As Received

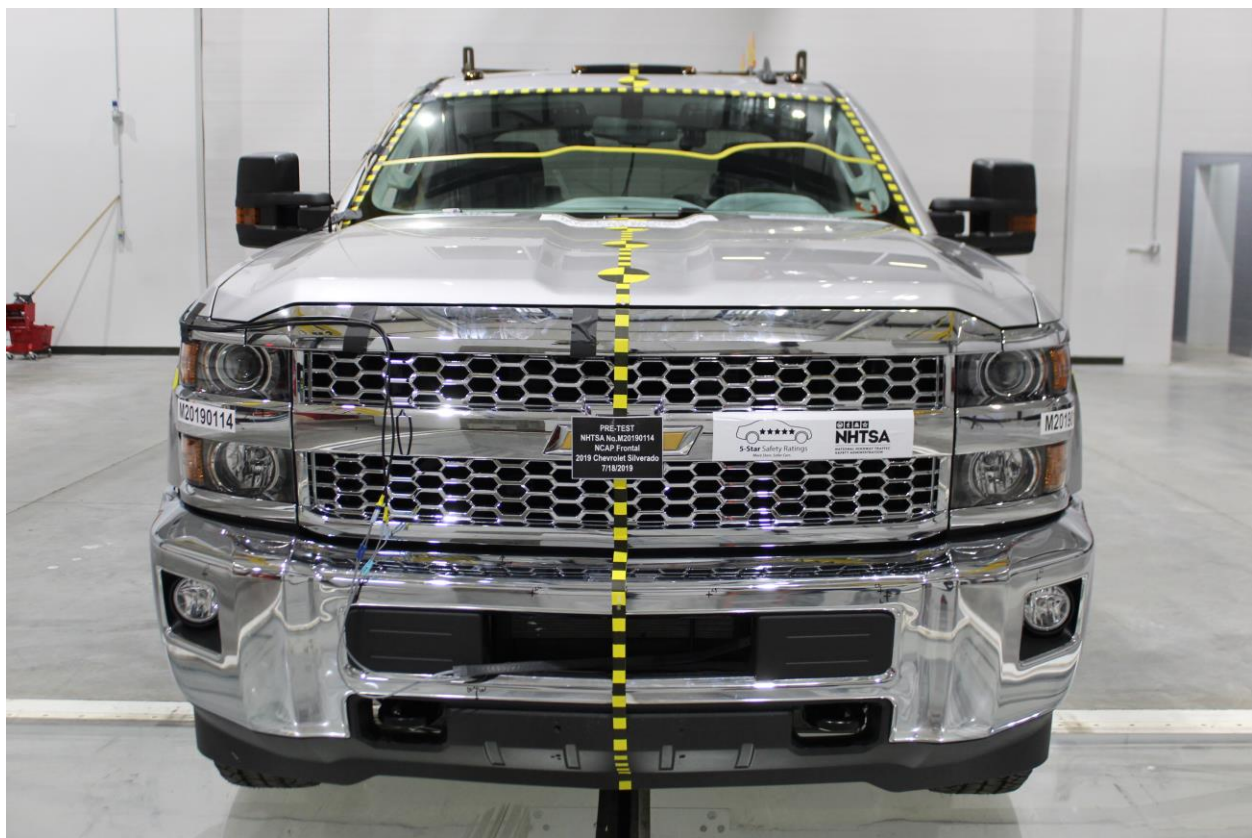


Figure A-8: Pre-Test Front View of Test Vehicle



Figure A-9: Post-Test Front View of Test Vehicle



Figure A-10: Pre-Test Left View of Test Vehicle



Figure A-11: Post-Test Left View of Test Vehicle



Figure A-12: Pre-Test Right View of Test Vehicle



Figure A-13: Post-Test Right View of Test Vehicle



Figure A-14: Pre-Test Right Front 3-4 View



Figure A-15: Post-Test Right Front 3-4 View



Figure A-16: Pre-Test Left Rear 3-4 View



Figure A-17: Post-Test Left Rear 3-4 View



Figure A-18: Pre-Test Windshield View



Figure A-19: Post-Test Windshield View



Figure A-20: Pre-Test Engine Compartment View



Figure A-21: Post-Test Engine Compartment View



Figure A-22: Pre-Test Fuel Filler Cap View



Figure A-23: Post-Test Fuel Filler Cap View

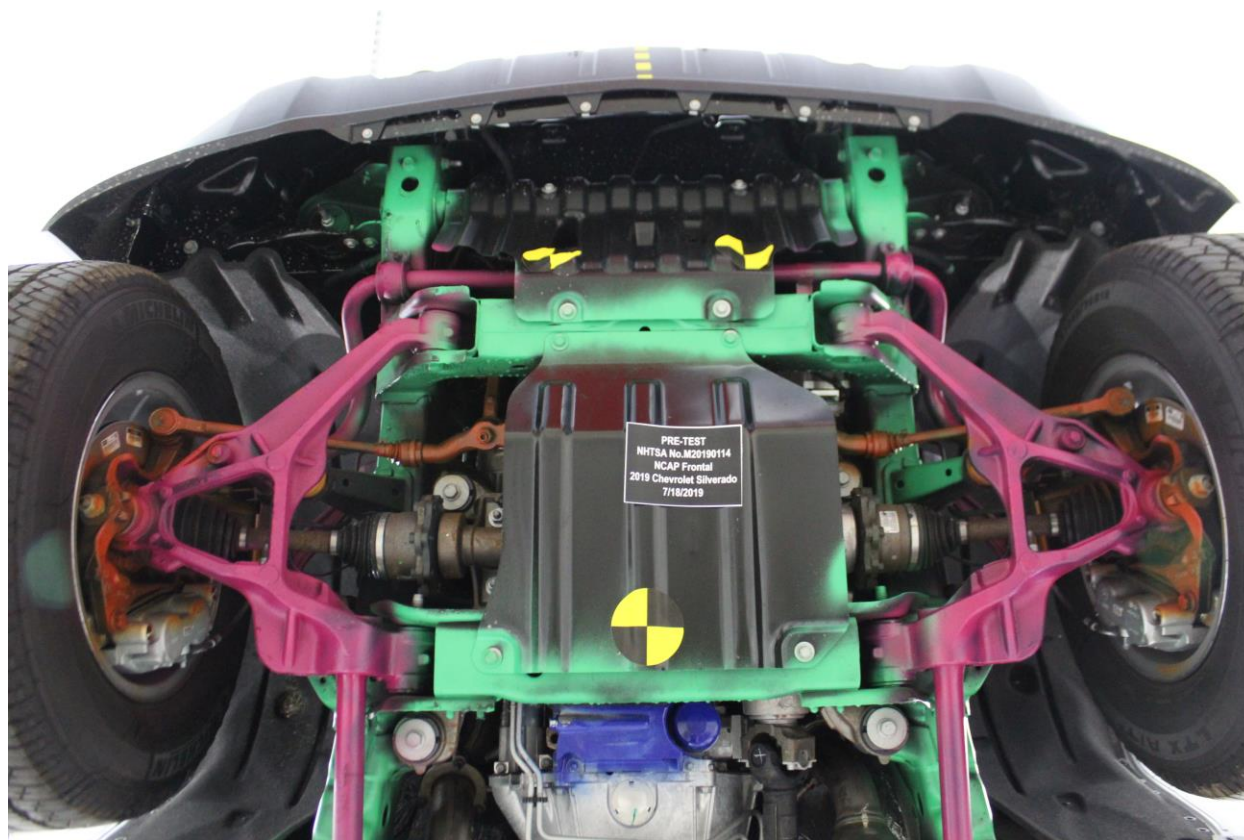


Figure A-24: Pre-Test Front Underbody View



Figure A-25: Post-Test Front Underbody View

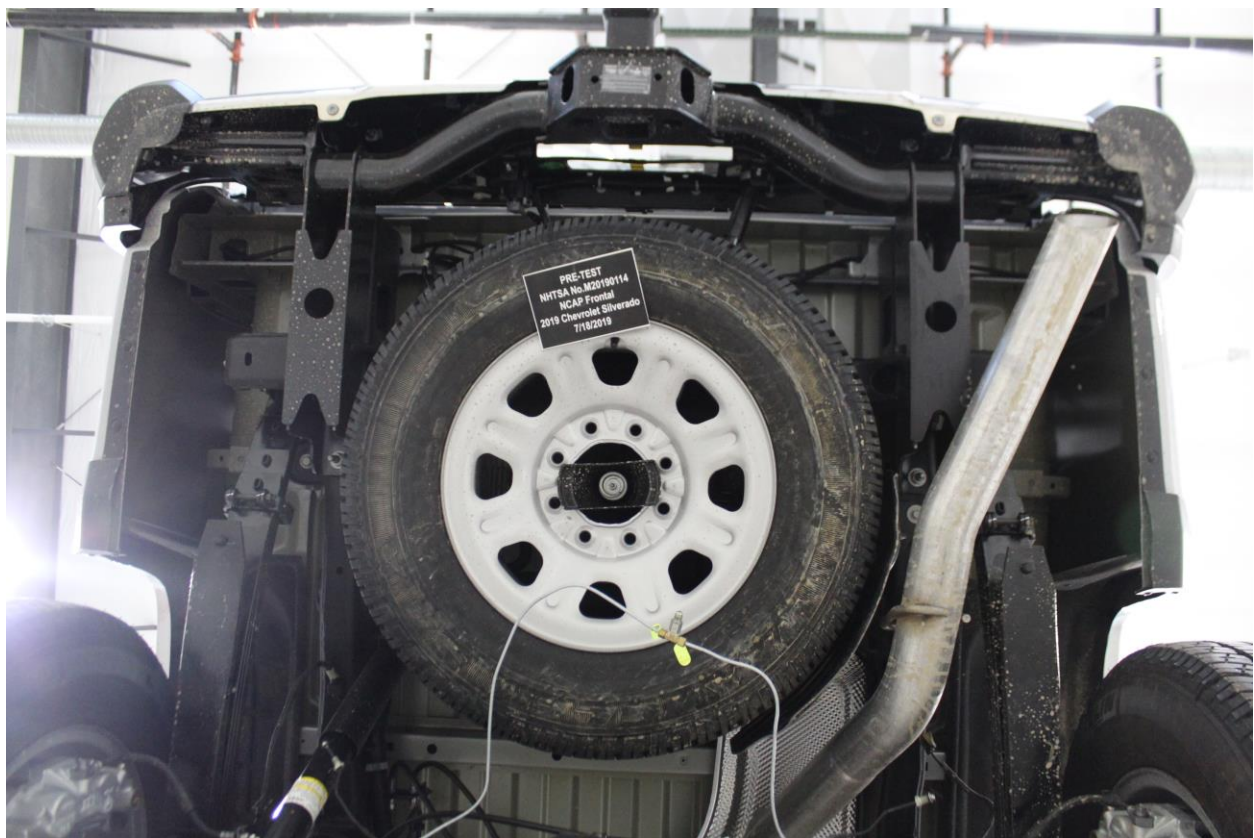


Figure A-26: Pre-Test Rear Underbody View

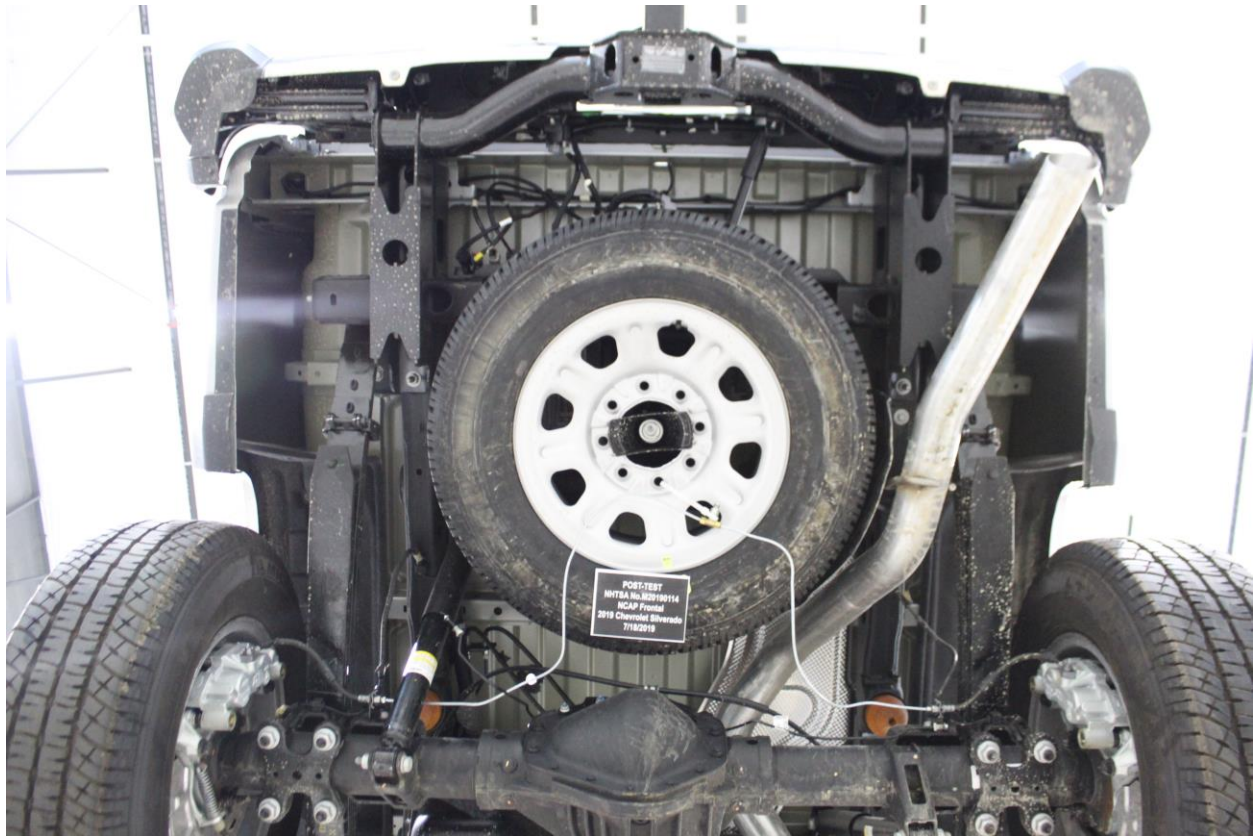


Figure A-27: Post-Test Rear Underbody View

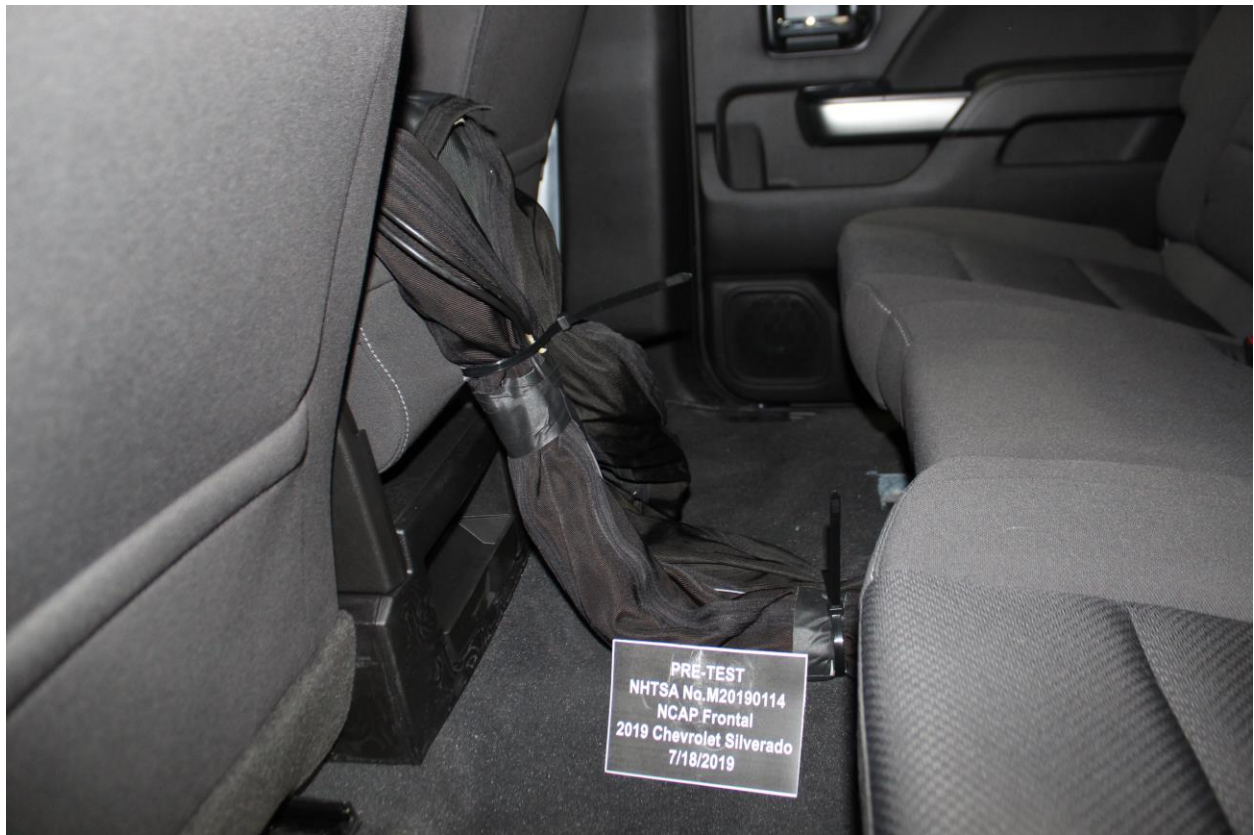


Figure A-28: Pre-Test Dummy Cable Routing



Figure A-29: Post-Test Dummy Cable Routing



Figure A-30: Pre-Test Driver Dummy Front View



Figure A-31: Post-Test Driver Dummy Front View



Figure A-32: Pre-Test Driver Dummy Window View

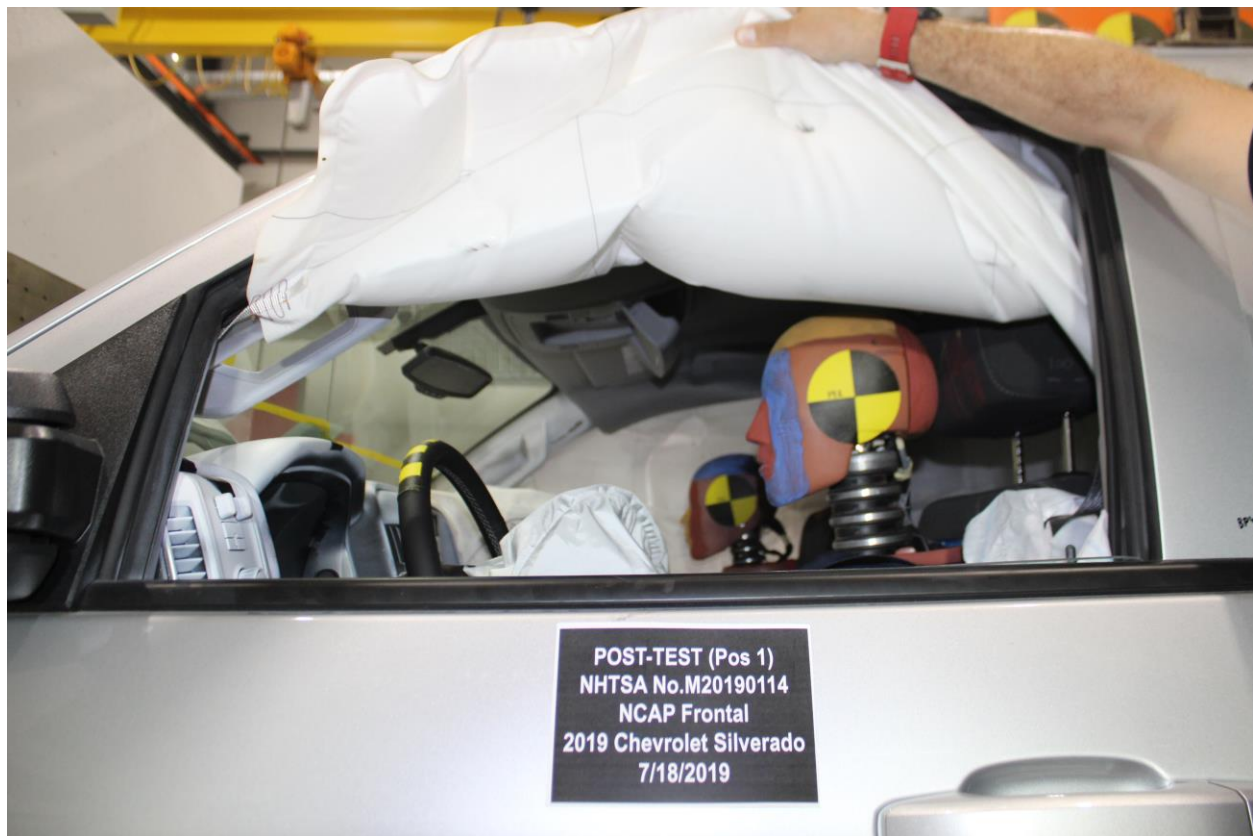


Figure A-33: Post-Test Driver Dummy Window View



Figure A-34: Pre-Test Driver Dummy and Vehicle Interior View



Figure A-35: Post-Test Driver Dummy and Vehicle Interior View



Figure A-36: Pre-Test Driver's Seat Fore-Aft Markings



Figure A-37: Post-Test Driver's Seat Fore-Aft Markings



Figure A-38: Pre-Test View of Belt Anchorage for Driver Dummy

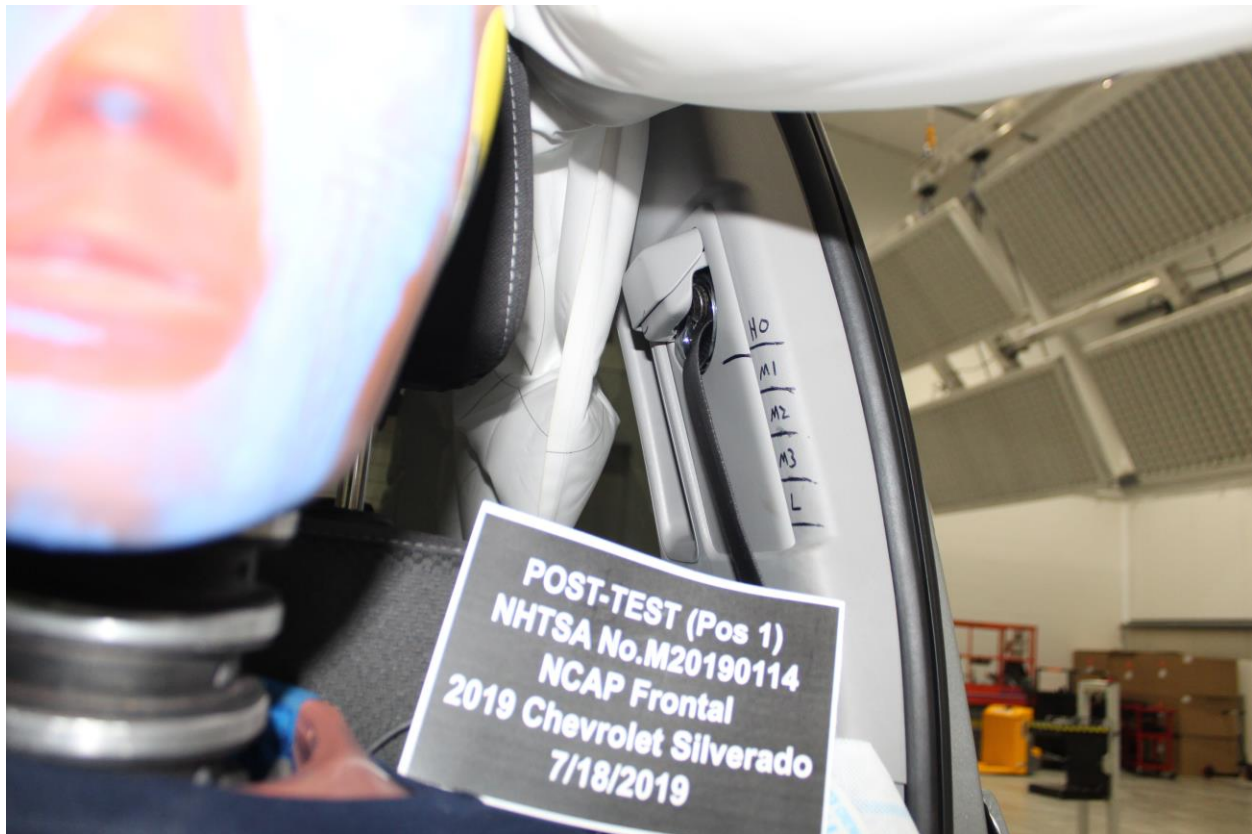


Figure A-39: Post-Test View of Belt Anchorage for Driver Dummy



Figure A-40: Pre-Test Driver Dummy Feet



Figure A-41: Post-Test Driver Dummy Feet



Figure A-42: Pre-Test Driver's Side Knee Bolster



Figure A-43: Post-Test Driver's Side Knee Bolster



Figure A-44: Pre-Test Driver's Side Floorpan



Figure A-45: Post-Test Driver's Side Floorpan



Figure A-46: Post-Test Driver Dummy Face



Figure A-47: Post-Test Driver Dummy Contact With Airbag



Figure A-48: Post-Test Driver Dummy Contact With Headrest



Figure A-49: Pre-Test View of the Steering Wheel



Figure A-50: Post-Test View of the Steering Wheel



Figure A-51: Pre-Test Passenger Dummy Front View

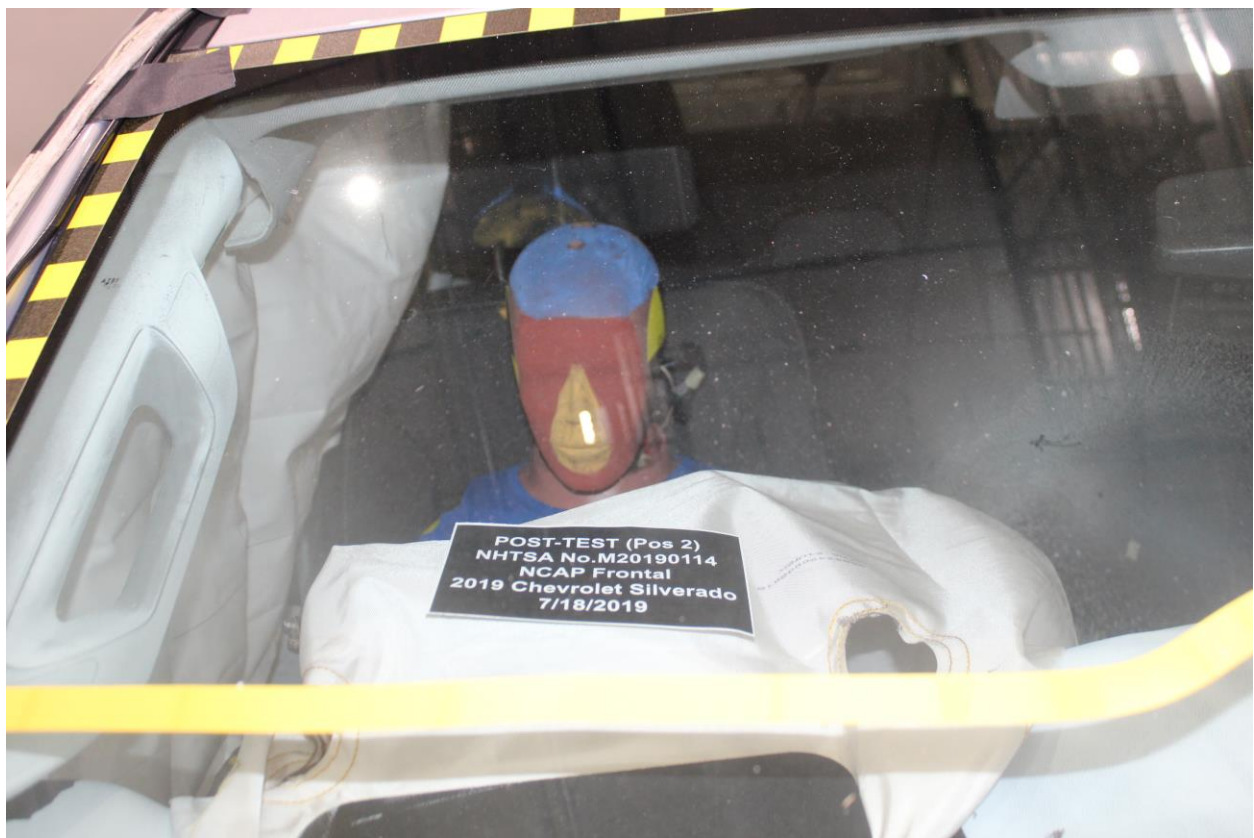


Figure A-52: Post-Test Passenger Dummy Front View



Figure A-53: Pre-Test Passenger Dummy Window View



Figure A-54: Post-Test Passenger Dummy Window View



Figure A-55: Pre-Test Passenger Dummy and Vehicle Interior View



Figure A-56: Post-Test Passenger Dummy and Vehicle Interior View



Figure A-57: Pre-Test Passenger's Seat Fore-Aft Markings



Figure A-58: Post-Test Passenger's Seat Fore-Aft Markings



Figure A-59: Pre-Test View of Belt Anchorage for Passenger Dummy



Figure A-60: Post-Test View of Belt Anchorage for Passenger Dummy



Figure A-61: Pre-Test Passenger Dummy Feet



Figure A-62: Post-Test Passenger Dummy Feet



Figure A-63: Pre-Test Passenger's Side Knee Bolster



Figure A-64: Post-Test Passenger's Side Knee Bolster



Figure A-65: Pre-Test Passenger's Side Floorpan



Figure A-66: Post-Test Passenger's Side Floorpan



Figure A-67: Post-Test Passenger Dummy Face

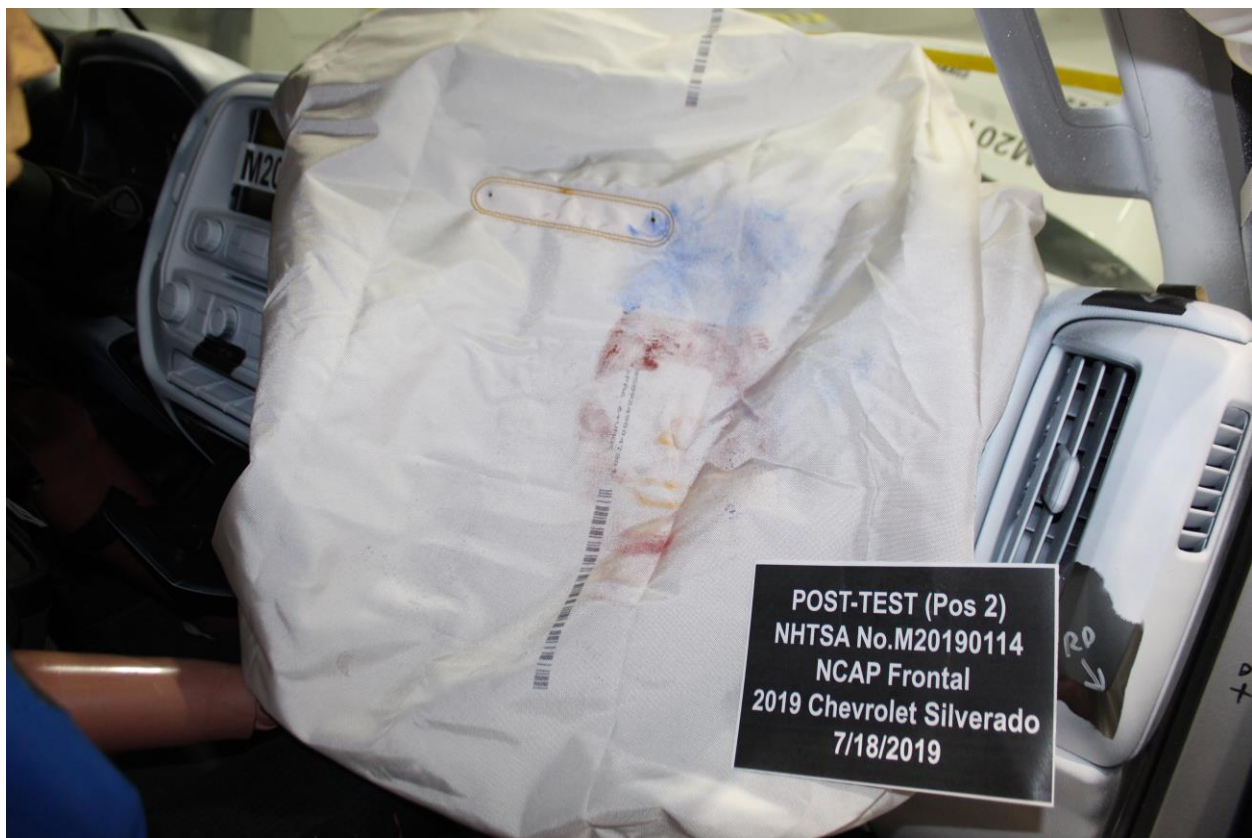


Figure A-68: Post-Test Passenger Dummy Contact With Airbag

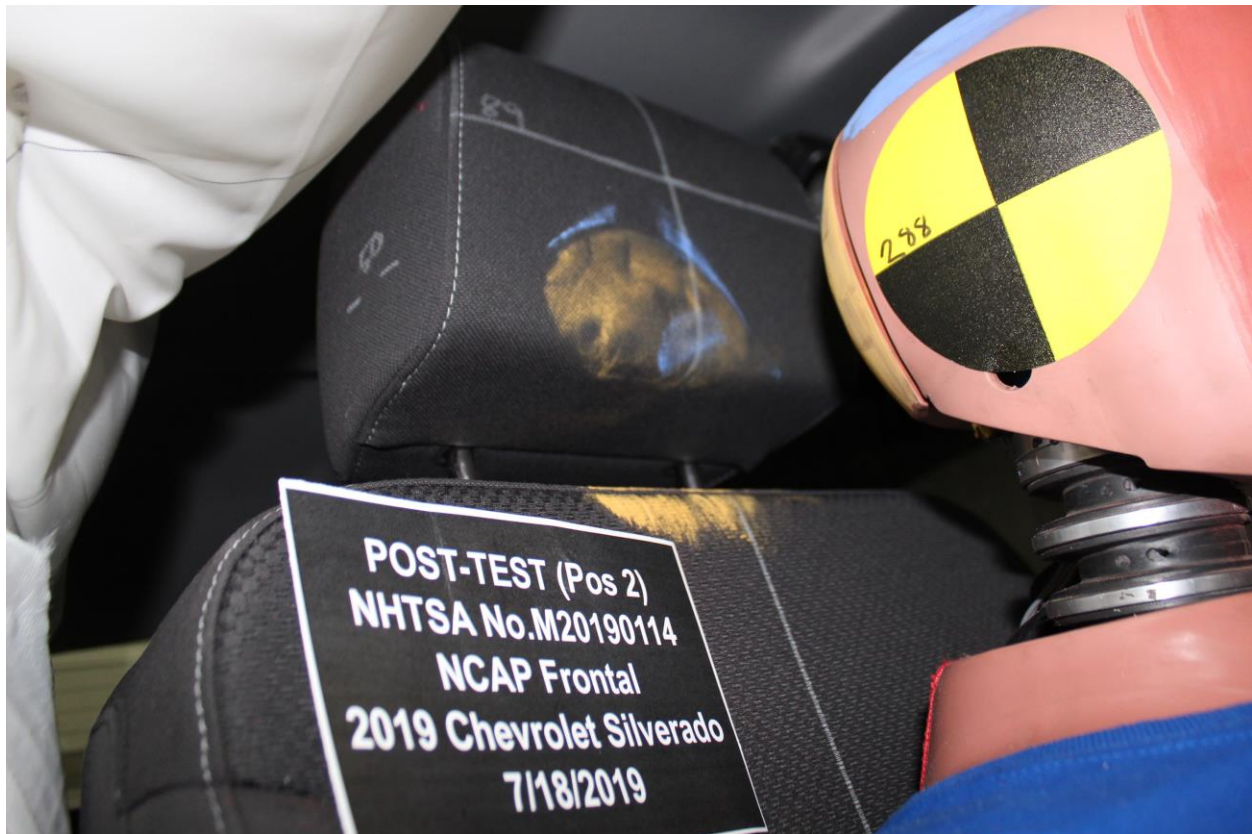


Figure A-69: Post-Test Passenger Dummy Contact With Headrest

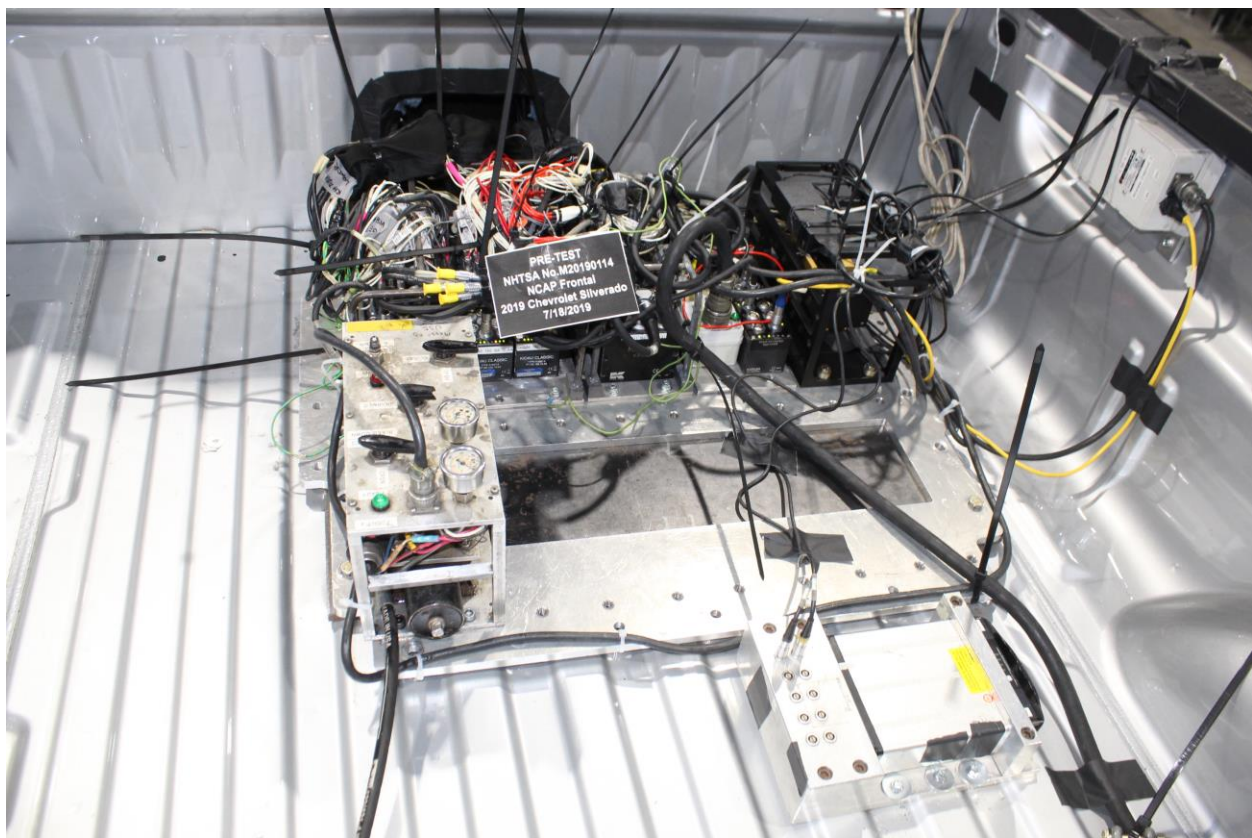


Figure A-70: Photograph of Ballast Installed in Vehicle

Photo Not Applicable

Figure A-71: Post-Test Stoddard Solvent Spillage Location View, If Required



Figure A-72: Post-Test Speed Trap Read-Out



Figure A-73: Vehicle at 0° on Static Rollover Device

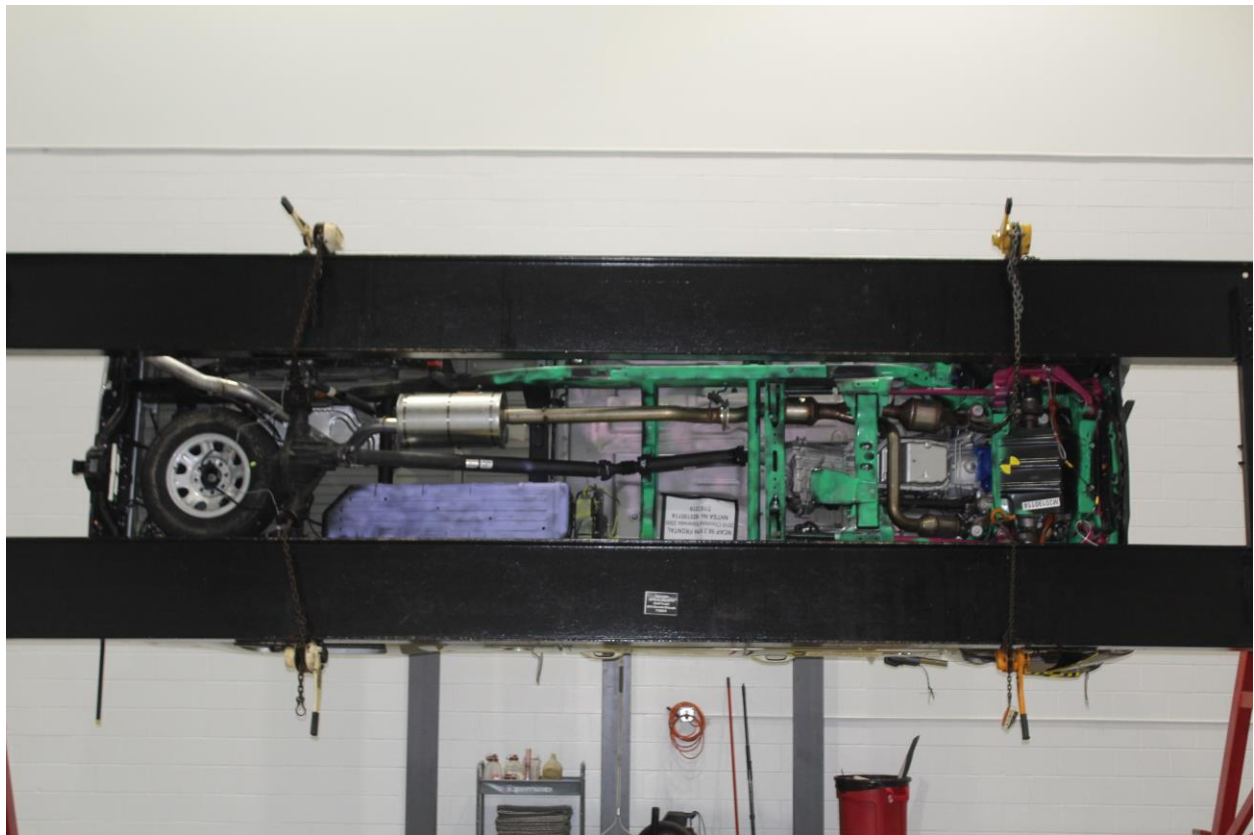


Figure A-74: Vehicle at 90° on Static Rollover Device



Figure A-75: Vehicle at 180° on Static Rollover Device

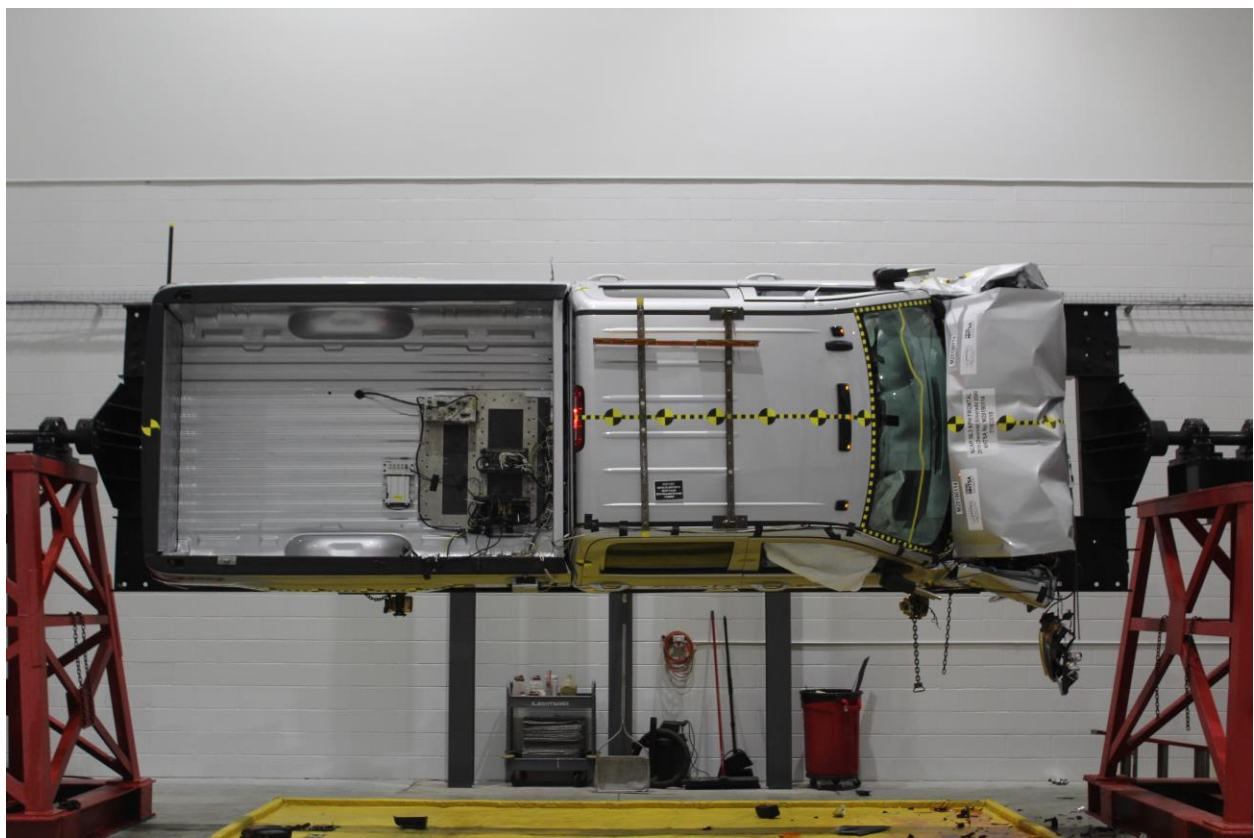


Figure A-76: Vehicle at 270° on Static Rollover Device



Figure A-77: Vehicle at 360° on Static Rollover Device

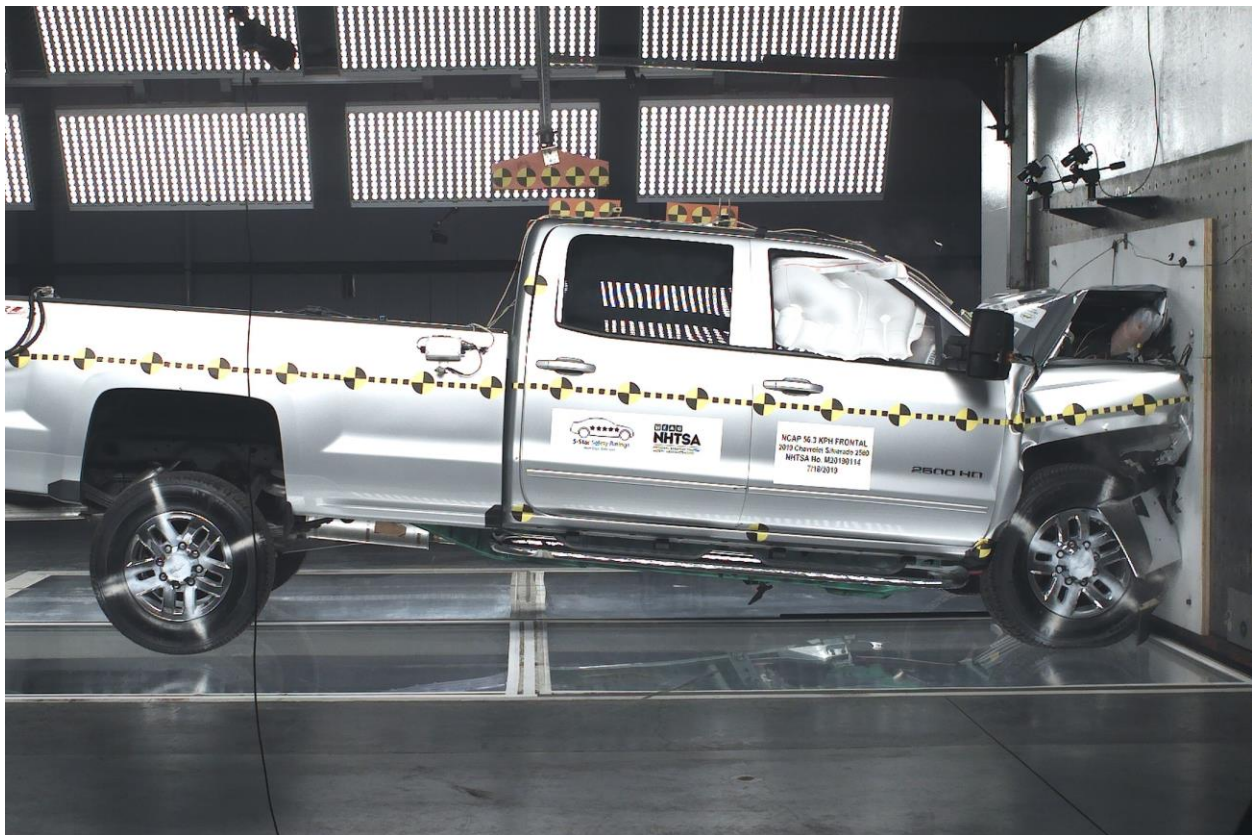


Figure A-78: 2019 Chevrolet Silverado 2500 Frontal Impact Event

2019 SILVERADO 2500 4WD LT CREW CAB

EXTERIOR: SILVER ICE METALLIC

INTERIOR: JET BLACK

VORTEC 6.0L V8 SFI GAS ENGINE
6-SPEED AUTOMATIC TRANSMISSION

Visit us at www.chevy.com

STANDARD EQUIPMENT

ITEMS LISTED BELOW ARE INCLUDED AT NO EXTRA CHARGE IN THE STANDARD VEHICLE PRICE (\$39,000).

• FIRST MAINTENANCE VISIT

OIL CHANGE

TIRE ROTATION & MULTI-POINT VEHICLE INSPECTION

SEE WWW.CHEVY.COM OR DEALER FOR DETAILS

• 3 YEAR/50,000 MILES BUMPER-TO-BUMPER WARRANTY

• 5 YEAR/100,000 MILES POWERTRAIN LIMITED WARRANTY

• ROADSIDE ASSISTANCE

• COURTESY TRANSPORTATION

MECHANICAL

• CAPLESS FUEL FILL

• VORTEC 6.0L V8 ENGINE

• 6-SPEED HD AUTO TRANSMISSION

• TRANSFER CASE, ELECTRONIC

• AUTO LOCKING RR DIFFERENTIAL

• 150 AMP ALTERNATOR

• AIR CLEANER, HIGH CAPACITY

SAFETY & SECURITY

• TORSION BAR FRONT SUSPENSION

• MULTI-LEAF REAR SPRING SUSP

• DIGITAL STEERING ASSIST

• STABILITRAK STABILITY CONTROL WITH TRAILER SWAY CONTROL AND HILL START ASSIST

• ANTILOCK BRAKES, 4 WHEEL DISC WITH DUAL-LEAF ROTORS (TM)

• TIRE PRESSURE MONITOR SYSTEM W/TIRE FILL ALERT-EXCL. SPARE

• ONSTAR (R) SERVICES CAPABLE (SUBJECT TO TERMS SEE ONSTAR.COM)

• REAR VISION CAMERA

EXTERIOR

• REMOTE LOCKING TAILGATE

• GLASS, DEEP-TINTED

• WHEELHOUSE LINERS, REAR

• POWER HEATED OUTSIDE MIRRORS

• HEADLAMP, PROJECTOR

• WHEELS, 17" MACHINED ALUMINUM

• TIRES, ALL SEASON

• SPARE TIRE LOCK

• RECOVERY HOOPS, FRONT

• FRONT BUMPER, CHROME

• REAR BUMPER, CHROME

• CORNERSTEP, REAR BUMPER

• BED RAIL PROTECTORS

INTERIOR

• SEATS, FRONT 40/20/40 BENCH

• SEAT 60/40 REAR FOLDING BENCH

• REMOTE KEYLESS ENTRY

• POWER WINDOWS, DRIVER EXPRESS

• POWER DOOR LOCKS

• COLOR KEYED CARPET

• AIR CONDITIONING

• CRUISE CONTROL

• VISORS, DRIVER AND FRONT PASSENGER, LIGHTED

• DRIVER INFO - COLOR DISPLAY

• STEERING WHEEL AUDIO CONTROLS

• LEATHER WRAP STEERING WHEEL

• STEERING COLUMN, TILT

• CHEVROLET INFOTAINMENT SYSTEM

• 8" DIAGONAL COLOR TOUCHSCREEN

VOICE RECOGNITION

BLUE TOOTH AUDIO STREAMING

APPLE CARPLAY & ANDROID AUTO CAPABLE, IN-VEHICLE APP CAPABLE

• SIRIUSXM ALL ACCESS + SERVICE SUBSCRIPTION SOLD SEPARATELY BY SIRIUSXM AFTER 3 MTHS (SUBJECT TO TERMS SEE ONSTAR.COM)

• HD RADIO

• SINGLE-SLOT CD/MP3 PLAYER

• USB PORTS

• BLUETOOTH FOR PHONE

OPTIONS & PRICING

MANUFACTURER'S SUGGESTED RETAIL PRICE

STANDARD VEHICLE PRICE \$47,200.00

OPTIONAL EQUIPMENT INSTALLED BY THE MANUFACTURER (MAY REPLACE STANDARD EQUIPMENT (SOME))

LT PLUS PACKAGE 415.00

• REAR PARK ASSIST

• POWER ADJUSTABLE PEDALS

HD ALL STAR EDITION 2,685.00

• TRAILERING EQUIPMENT PKG

• TRAILER BRAKE CONTROLLER

• PWR SEAT ADJUSTER, DRIVER

• FRONT FOG LAMPS

• AIR CONDITIONING, DUAL ZONE CLIMATE CONTROL

• STEERING COLUMN, TILT & TELESCOPING

• REMOTE VEHICLE START

• REAR WINDOW DEFROSTER

• POWER OUTLET, 110-VOLT AC

• 6" TUBULAR CHROME ASSIST STEPS (DEALER INSTALLED)

• 18" CHROME ALUM WHEELS

• SNOW PLOW PREP PACKAGE

• POWER FEED FOR BACKUP AND ROOF EMERGENCY LIGHT

• ALTERNATOR, 220 AMPS

• FORWARD LAMP WIRING HARNESS

• PROVISIONS-ROOF MOUNTED LAMP

• UNDERBODY SHIELDS

POWER OUTSIDE CAMPER MIRRORS WITH HEAT AND TURN SIGNAL (REPLACES STD/OPT MIRRORS)

18" ALL-TERRAIN BLACKWALL TIRES

LED LIGHTING, CARGO BOX

ROOF-MARKER LAMPS

CAMPER/5TH WHEEL TRAILER WIRING

PROVISIONS

GVW RATING - 9,900 LBS

REAR AXLE, 4.10 RATIO

TOTAL OPTIONS \$5,505.00

TOTAL VEHICLE & OPTIONS \$52,705.00

DESTINATION CHARGE 1,495.00

TOTAL BEFORE SAVINGS \$54,200.00

HD ALL STAR EDITION PACKAGE -750.00

DISCOUNT

TOTAL VEHICLE PRICE* \$53,450.00

EPA DOT Fuel Economy and Environment

NOT APPLICABLE TO THIS VEHICLE

fueleconomy.gov

Calculate personalized estimates and compare vehicles

GOVERNMENT 5-STAR SAFETY RATINGS

Overall Vehicle Score Not Rated

Based on the combined ratings of frontal, side and rollover. Should ONLY be compared to other vehicles of similar size and weight.

Frontal Crash Driver Passenger Not Rated Not Rated

Based on the risk of injury in a frontal impact. Should ONLY be compared to other vehicles of similar size and weight.

Side Crash Front seat Rear seat ★★★★★ ★★★★★

Based on the risk of injury in a side impact.

Rollover ★★★★★

Based on the risk of rollover in a single-vehicle crash.

Star ratings range from 1 to 5 stars (★★★★★) with 5 being the highest. Source: National Highway Traffic Safety Administration (NHTSA) www.safercar.gov or 1-888-327-4236

Equipped with the safety and security of OnStar.

Visit onstar.com for details.

onstar.com/onstar

ORDER NO. WTD04R SALES CODE E

SALES MODEL CODE C00000

DEALER NO. 13445

PLANT ADDRESSES

PLANT NO. 13445

VIN 1GCK5K5G3KF272168

DEALER TO WHOM DELIVERED

TRADITION CHEVROLET BUICK GMC

PO BOX 228

NEWARK, NY 14513-0362

FF

2GA2947676

Figure A-79: Monroney Label Photograph


A-44

APPENDIX B
VEHICLE & DUMMY RESPONSE DATA TRACES


Table of Data Plots

No.	Description	Page
Plot 1	Driver Head X Acceleration vs. Time Primary	B-3
Plot 2	Driver Head Y Acceleration vs. Time Primary	B-3
Plot 3	Driver Head Z Acceleration vs. Time Primary	B-3
Plot 4	Driver Head Resultant Acceleration vs. Time Primary	B-3
Plot 5	Driver Chest X Deflection vs. Time	B-4
Plot 6	Driver Chest X Acceleration vs. Time Primary	B-4
Plot 7	Driver Chest Y Acceleration vs. Time Primary	B-4
Plot 8	Driver Chest Z Acceleration vs. Time Primary	B-4
Plot 9	Driver Chest Resultant Acceleration vs. Time Primary	B-5
Plot 10	Driver Upper Neck Force X vs. Time Primary	B-5
Plot 11	Driver Upper Neck Force Z vs. Time Primary	B-5
Plot 12	Driver Upper Neck Moment Y vs. Time Primary	B-5
Plot 13	Driver Nij vs. Time Primary	B-6
Plot 14	Driver Left Femur Force vs. Time	B-6
Plot 15	Driver Right Femur Force vs. Time	B-6
Plot 16	Passenger Head X Acceleration vs. Time Primary	B-6
Plot 17	Passenger Head Y Acceleration vs. Time Primary	B-7
Plot 18	Passenger Head Z Acceleration vs. Time Primary	B-7
Plot 19	Passenger Head Resultant Acceleration vs. Time Primary	B-7
Plot 20	Passenger Chest X Deflection vs. Time	B-7
Plot 21	Passenger Chest X Acceleration vs. Time Primary	B-8
Plot 22	Passenger Chest Y Acceleration vs. Time Primary	B-8
Plot 23	Passenger Chest Z Acceleration vs. Time Primary	B-8
Plot 24	Passenger Chest Resultant Acceleration vs. Time Primary	B-8
Plot 25	Passenger Upper Neck Force X vs. Time Primary	B-9
Plot 26	Passenger Upper Neck Force Z vs. Time Primary	B-9
Plot 27	Passenger Upper Neck Moment Y vs. Time Primary	B-9
Plot 28	Passenger Nij vs. Time Primary	B-9
Plot 29	Passenger Left Femur Force vs. Time	B-10
Plot 30	Passenger Right Femur Force vs. Time	B-10


Driver Head X Acceleration vs. Time Primary

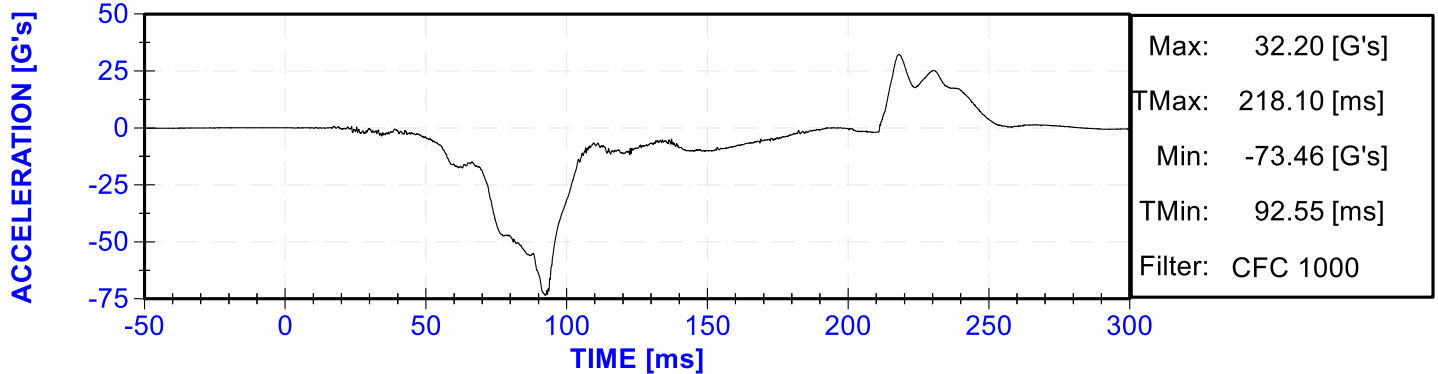


Driver Head Y Acceleration vs. Time Primary




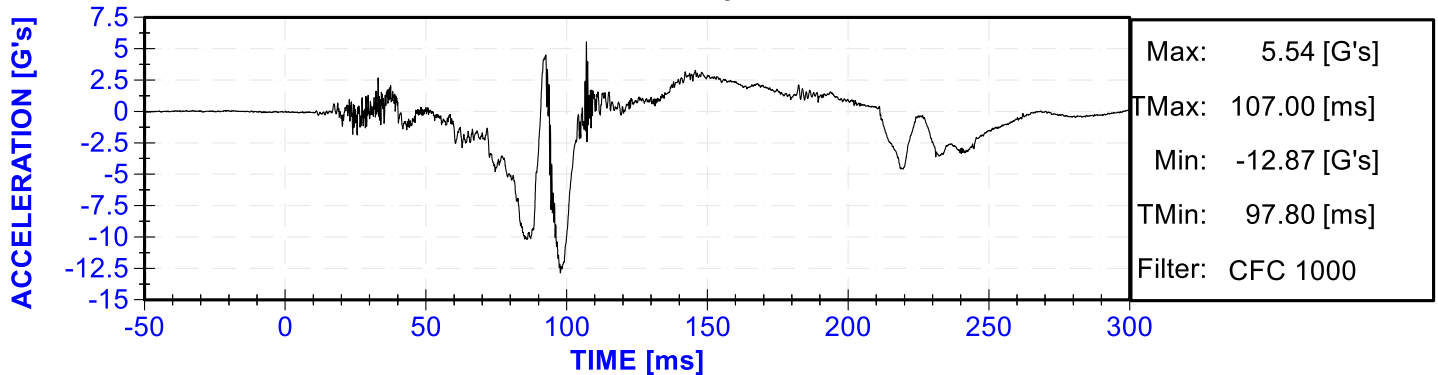


Driver Head Z Acceleration vs. Time Primary

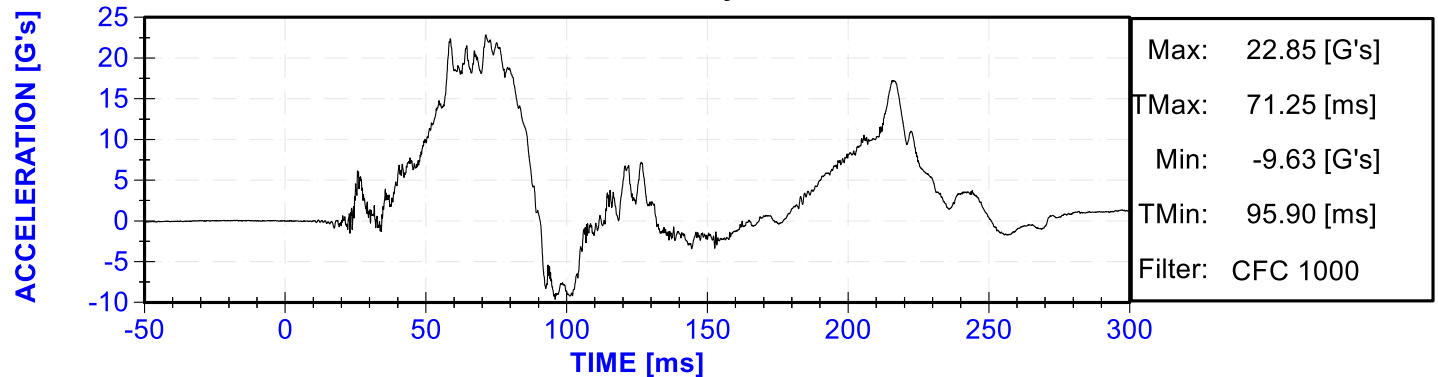


Driver Head Resultant Acceleration vs. Time Primary

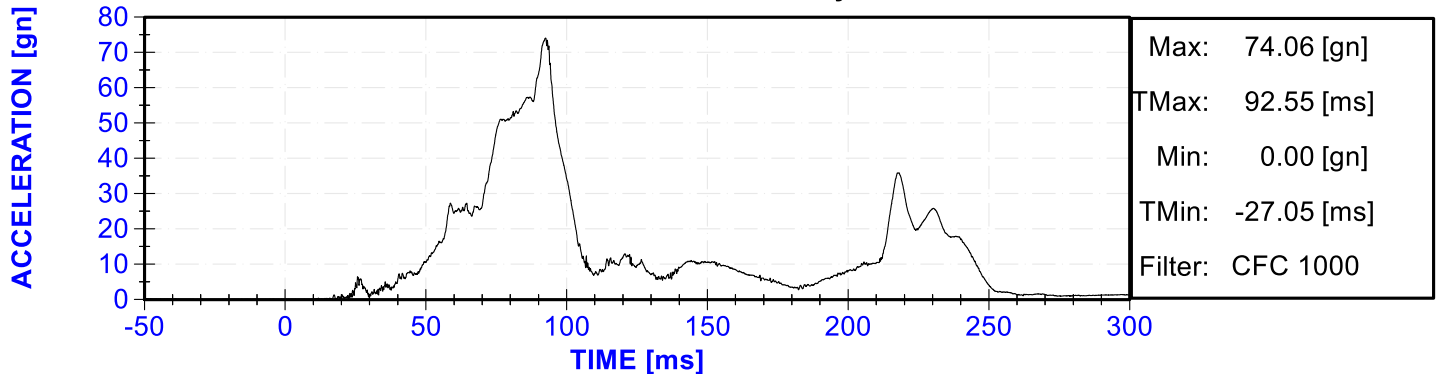


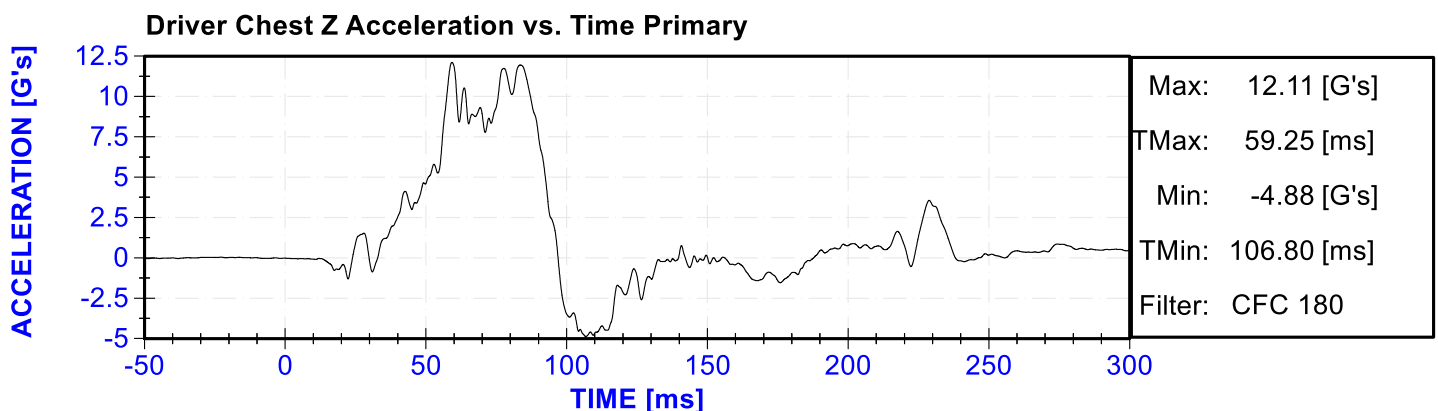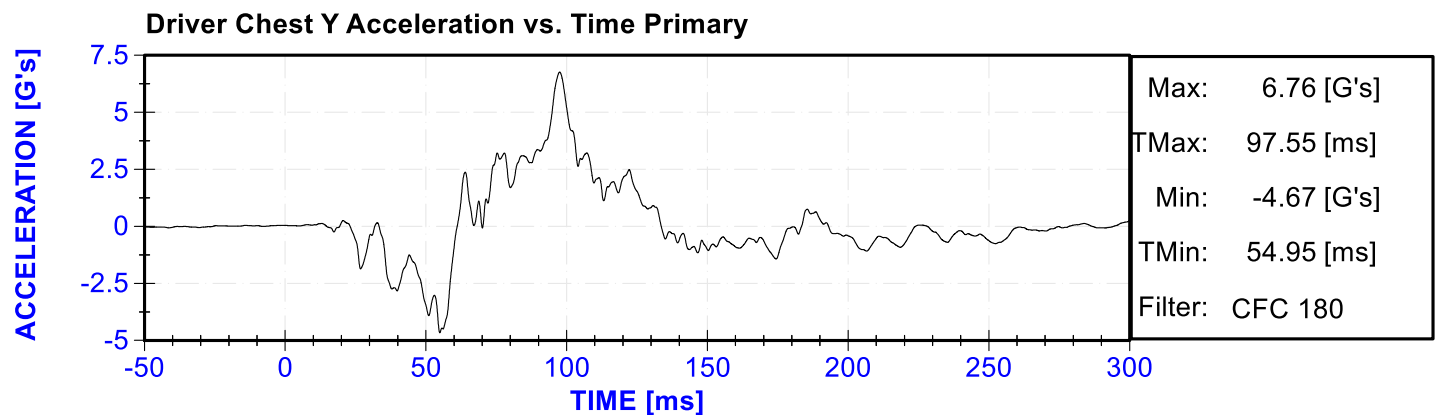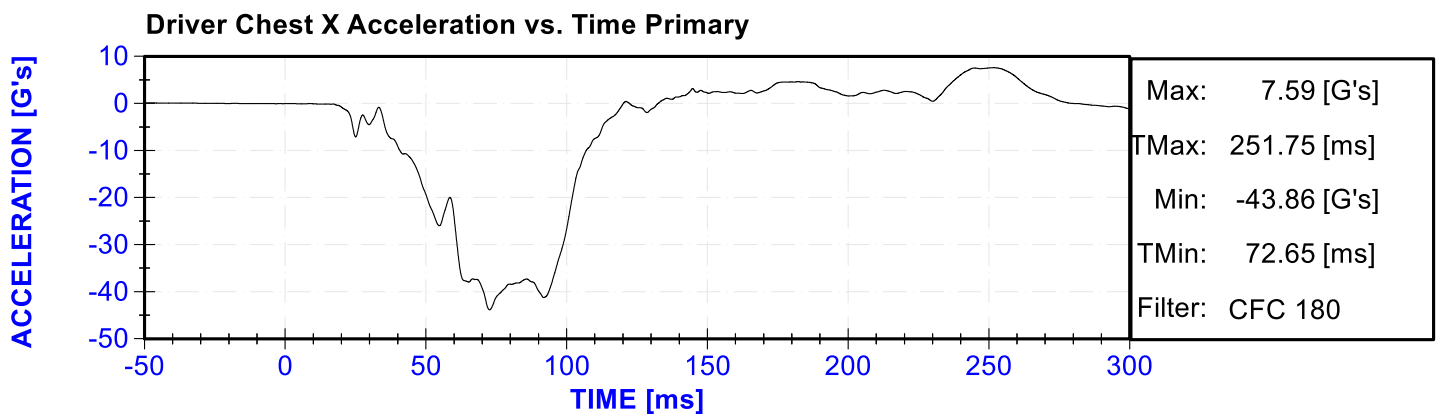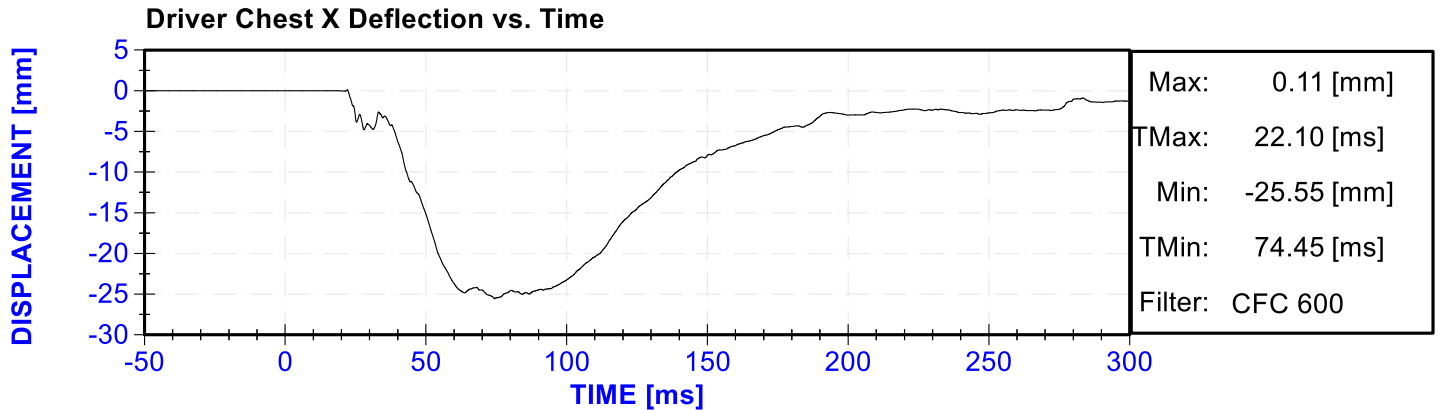


Driver Chest Resultant Acceleration vs. Time Primary

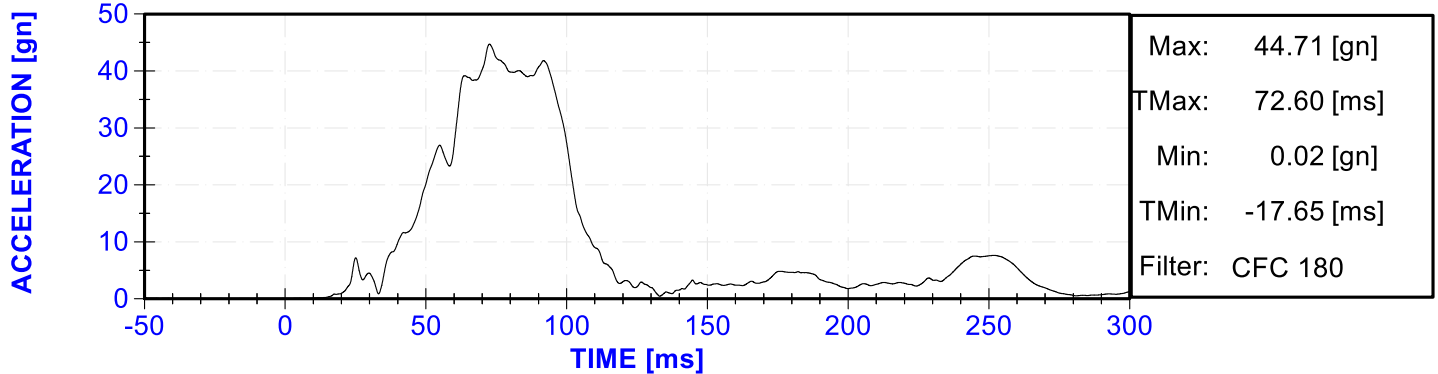


Driver Upper Neck Force X vs. Time Primary




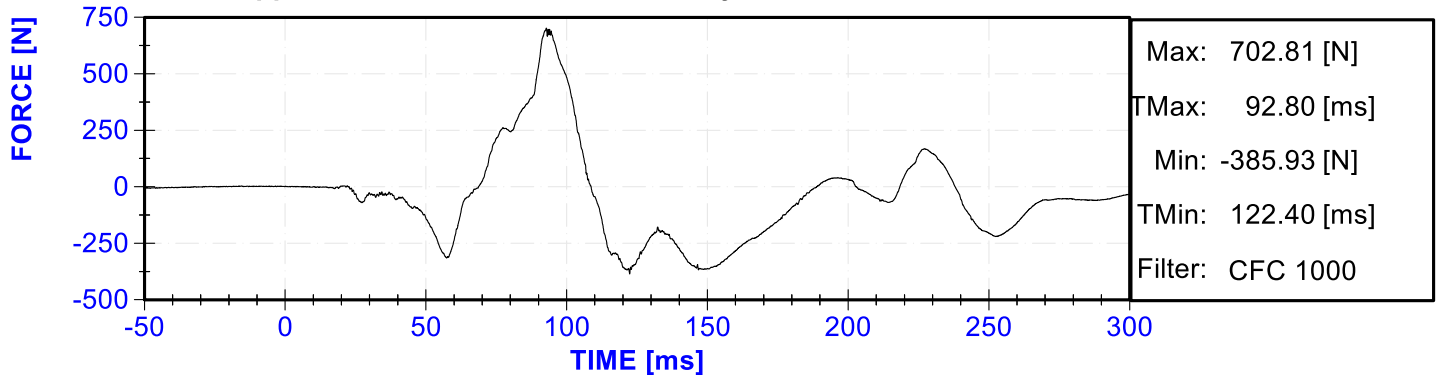


Driver Upper Neck Force Z vs. Time Primary

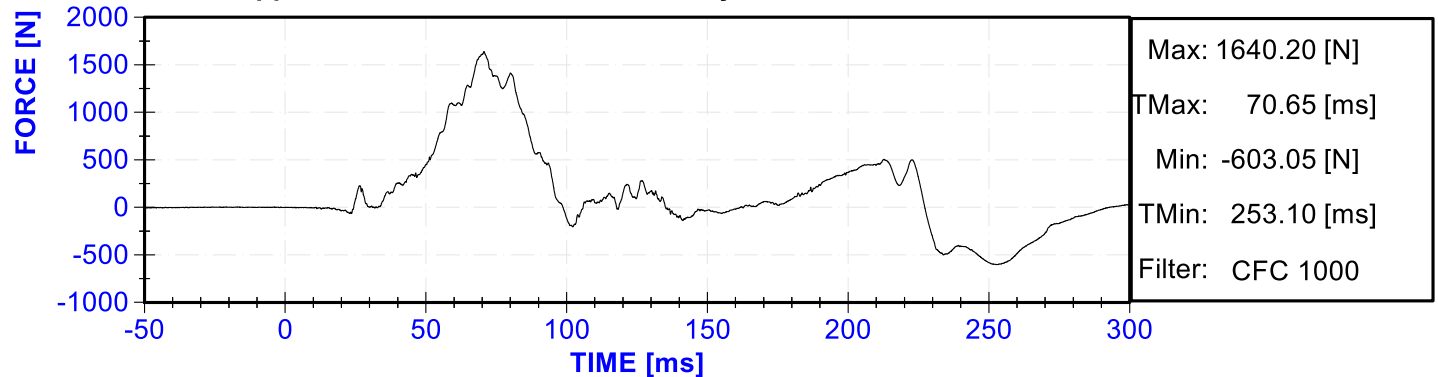


Driver Upper Neck Moment Y vs. Time Primary

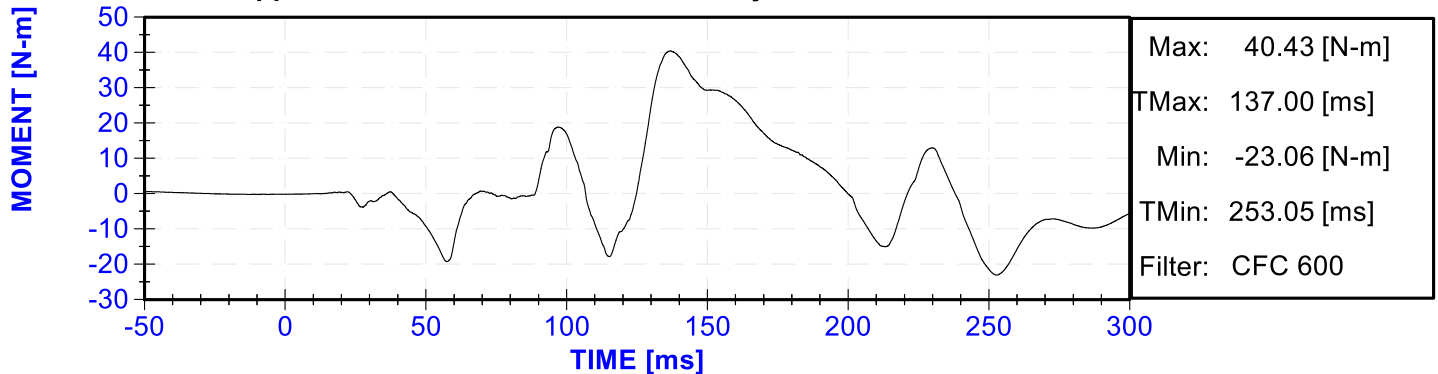


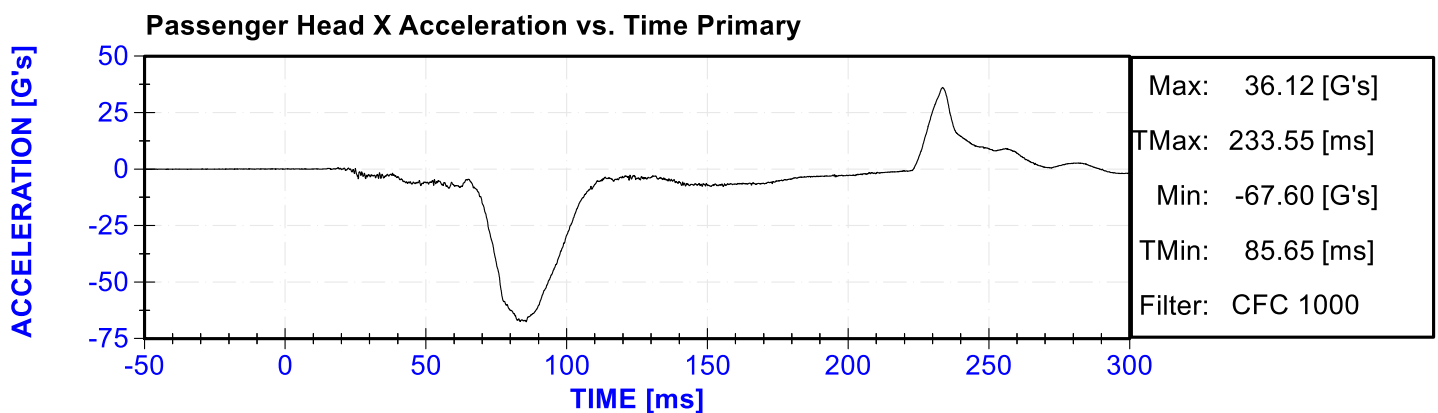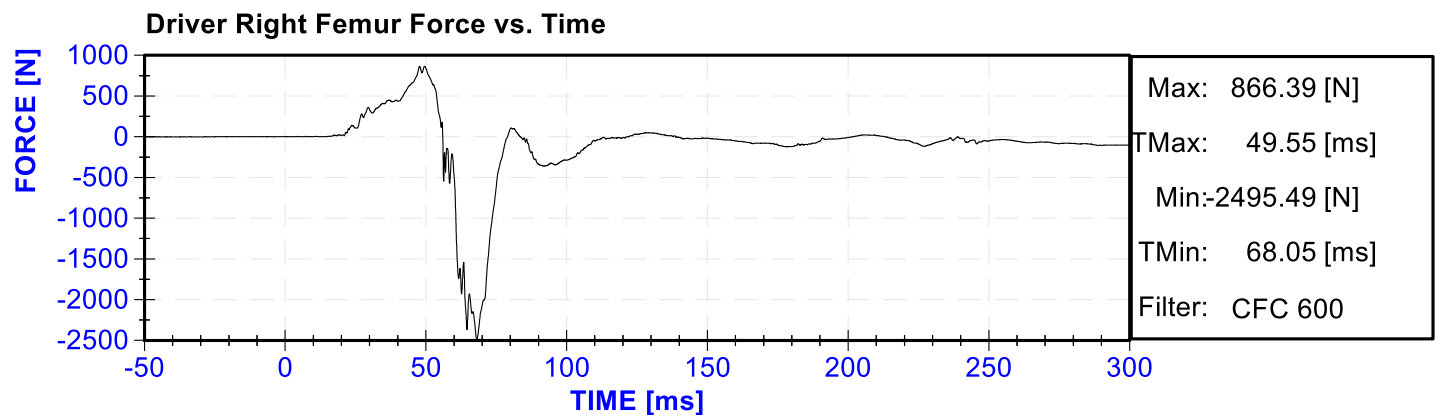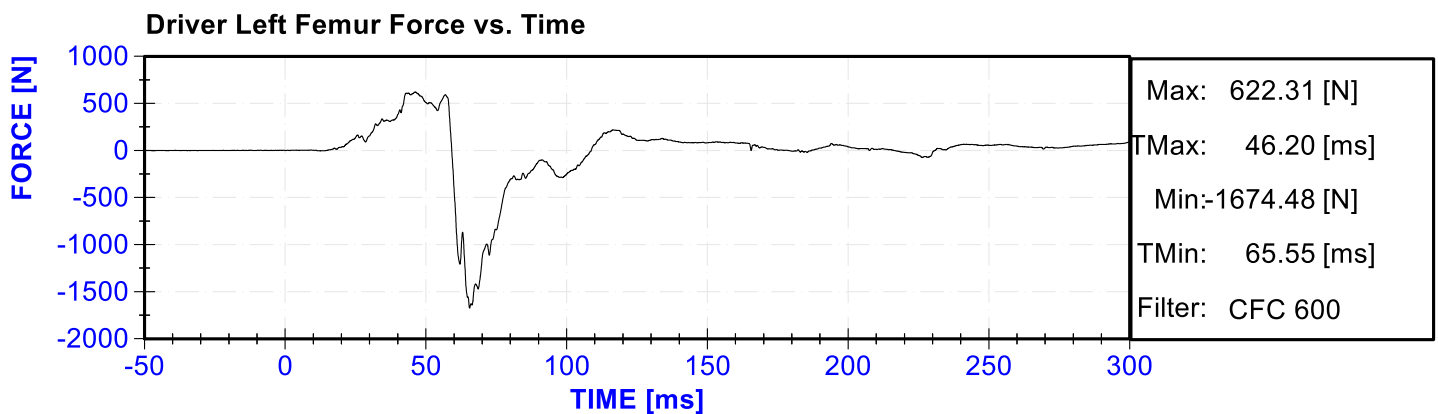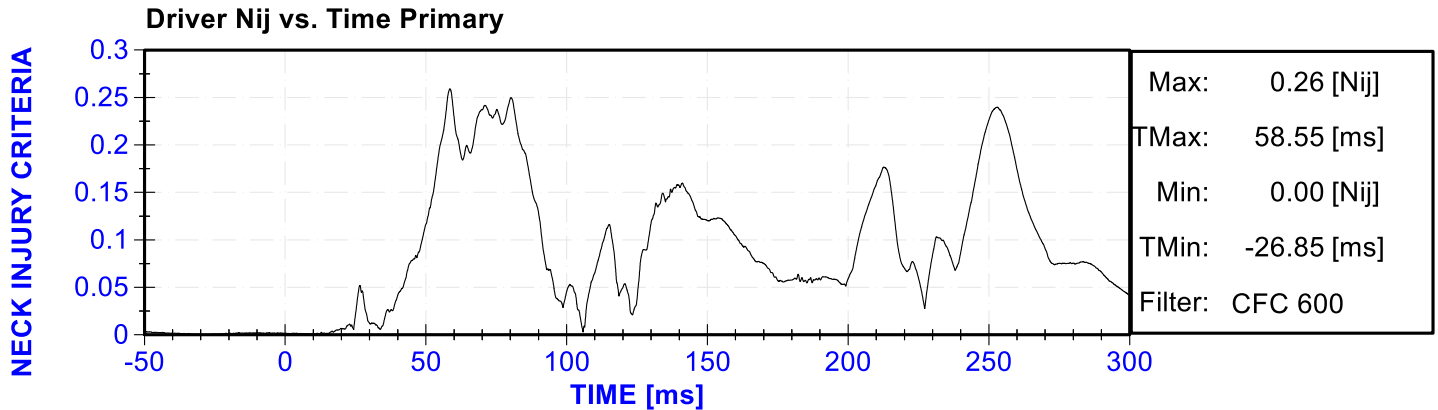


Passenger Head Y Acceleration vs. Time Primary

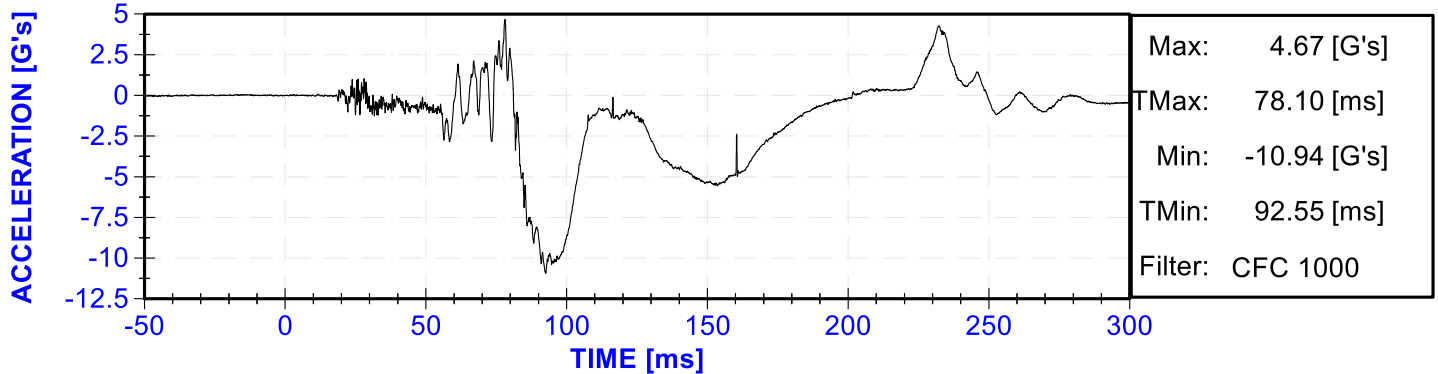


Passenger Head Z Acceleration vs. Time Primary




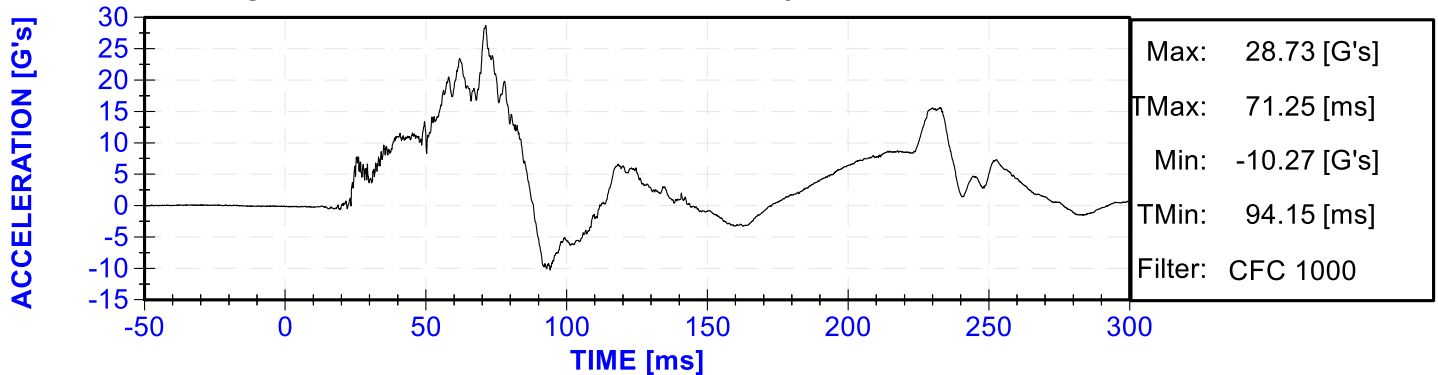






Passenger Head Resultant Acceleration vs. Time Primary

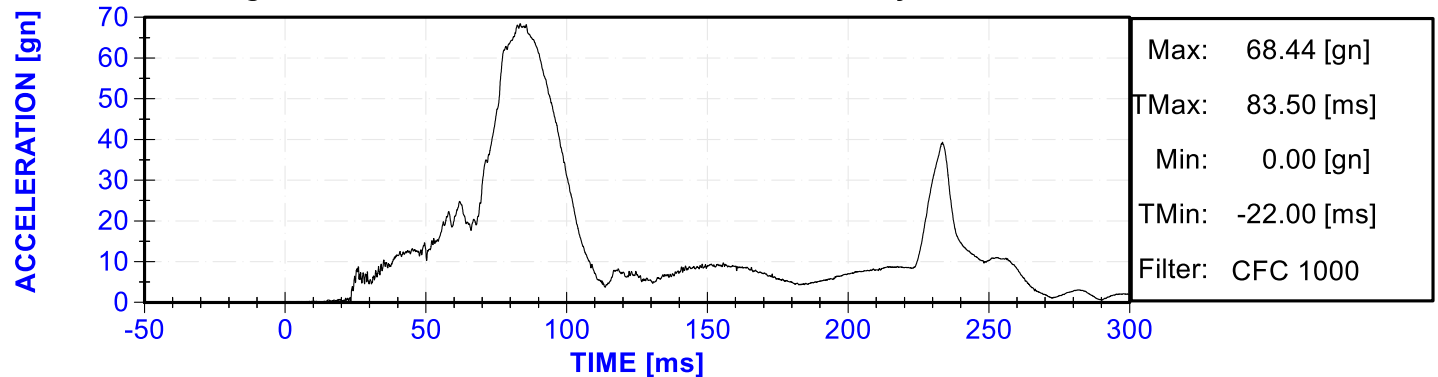


Passenger Chest X Deflection vs. Time

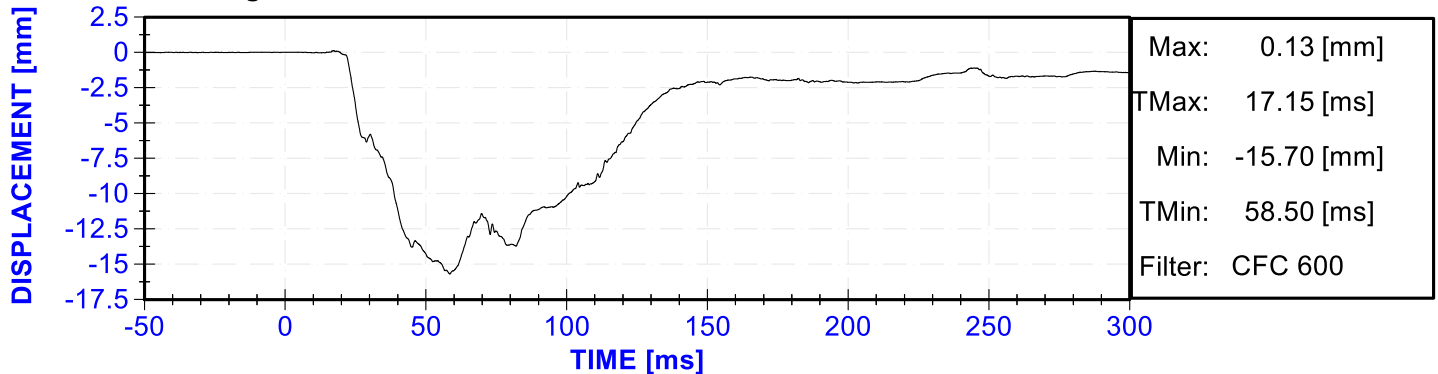

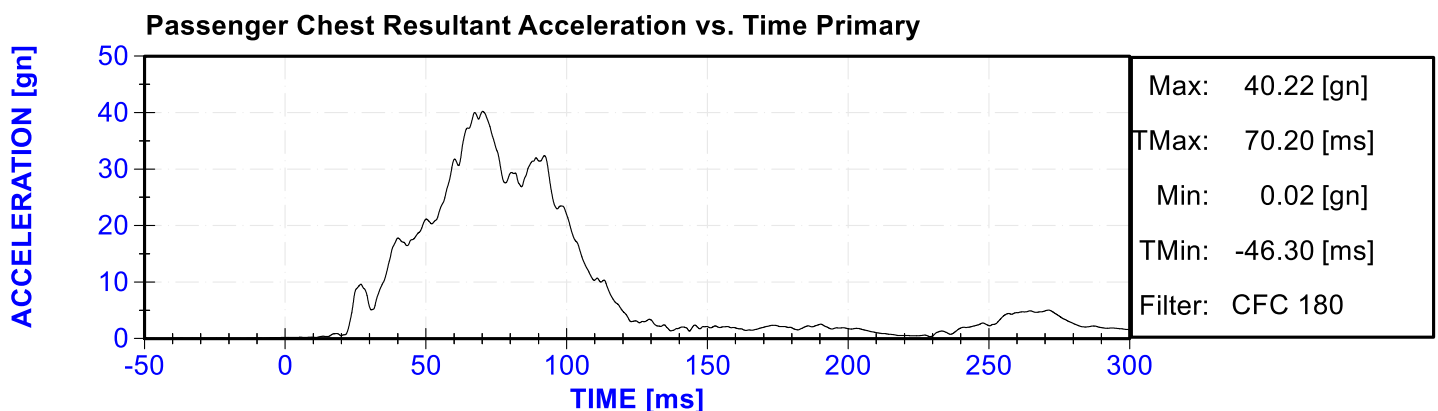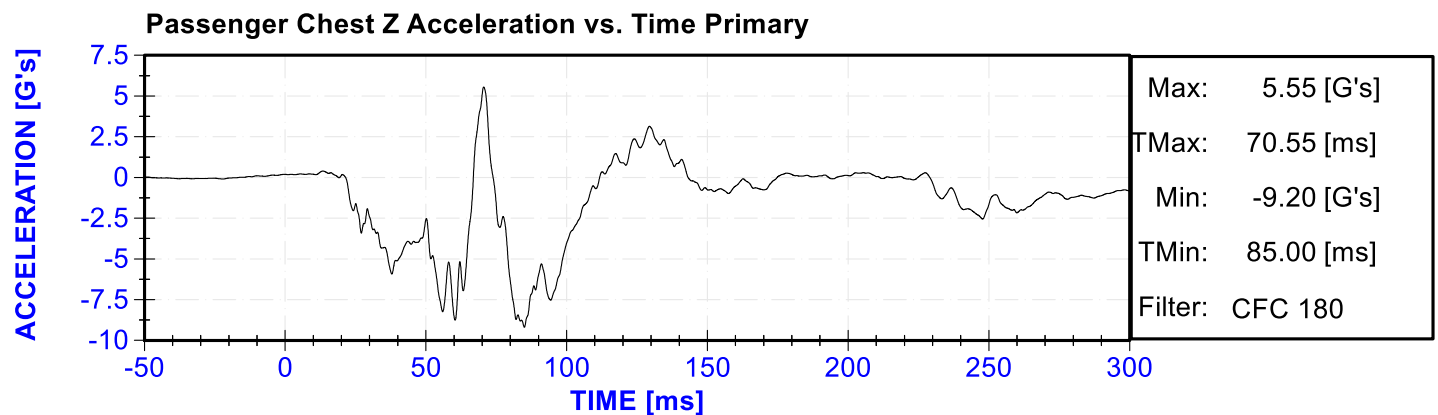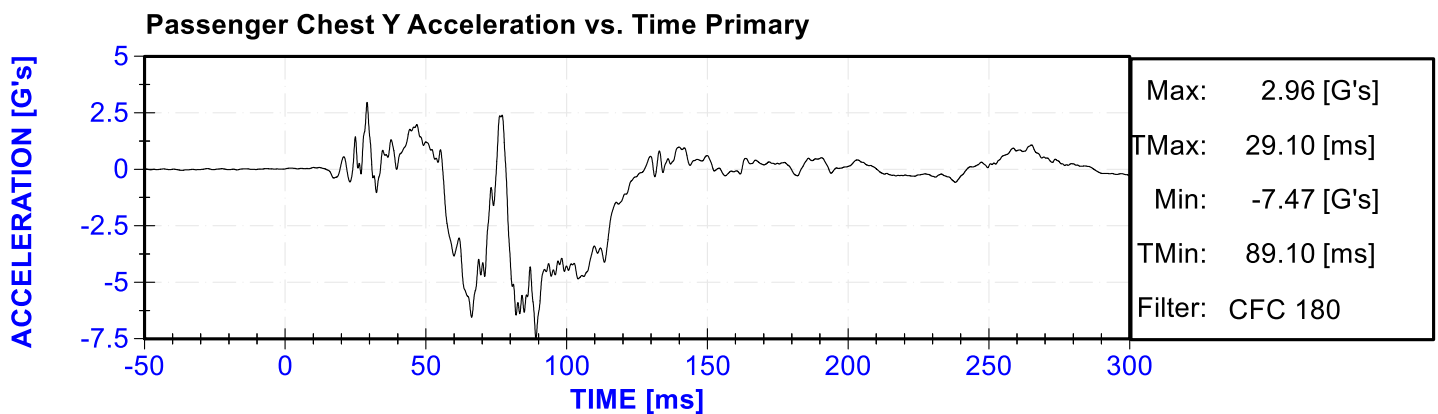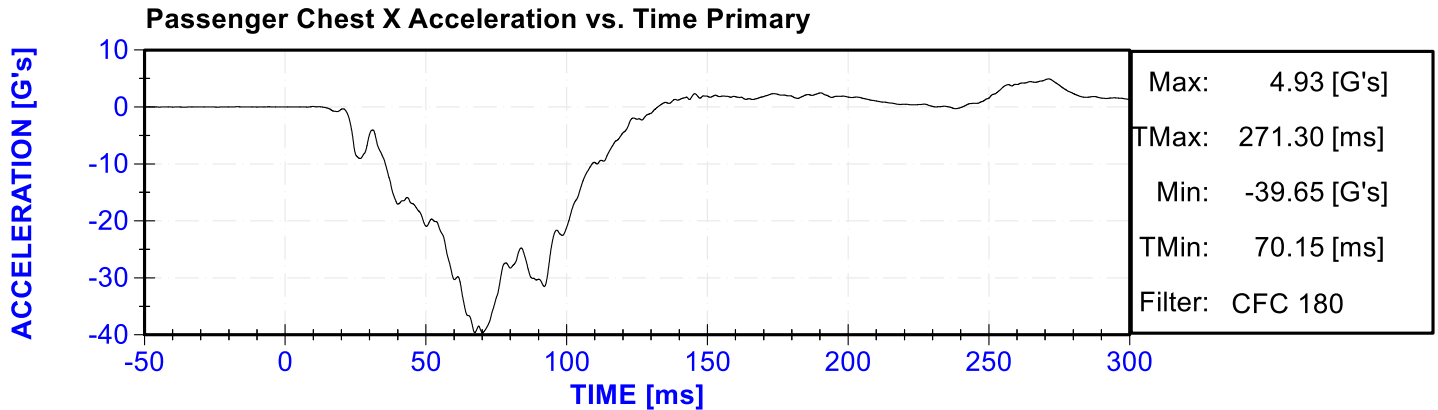


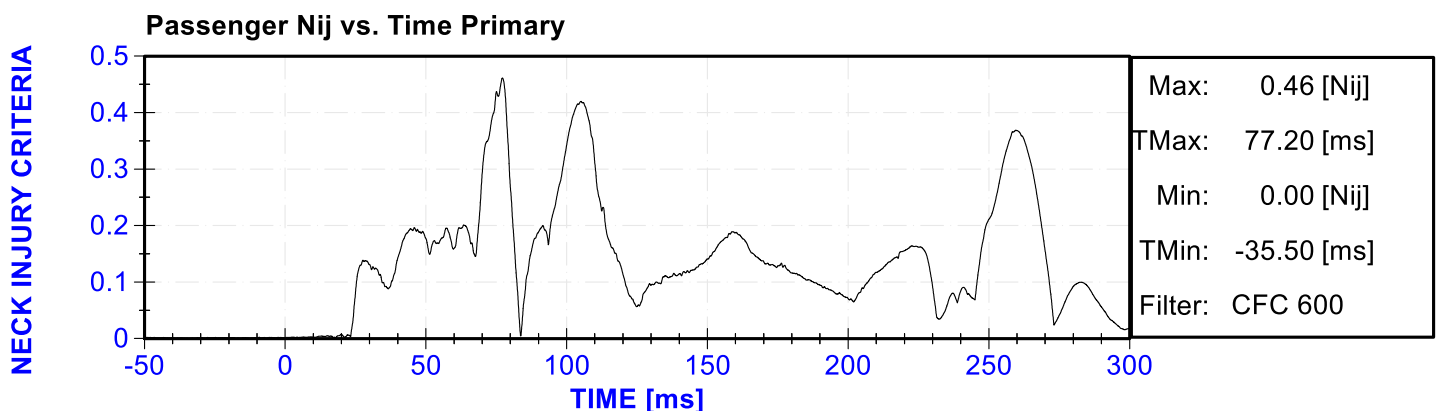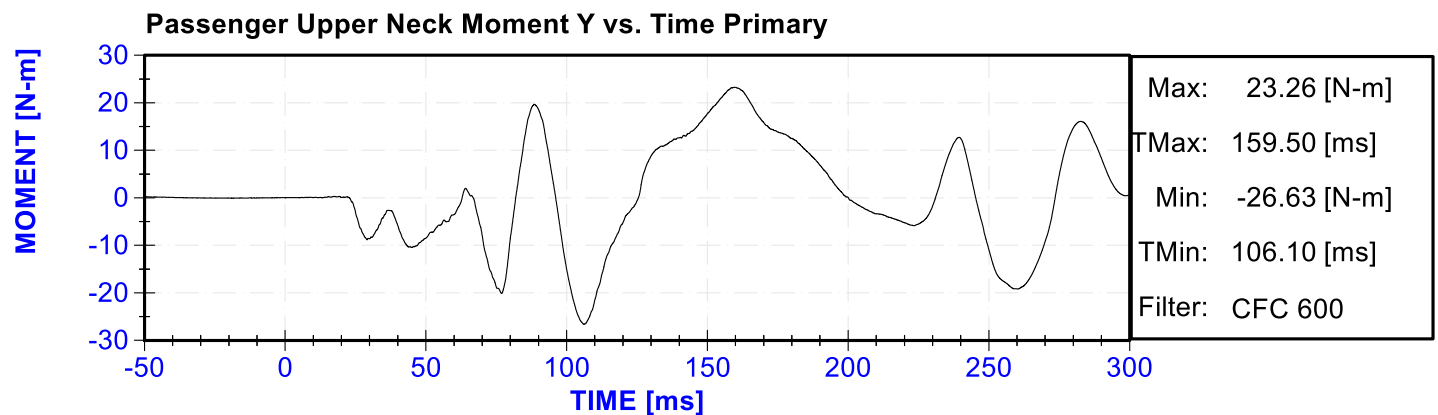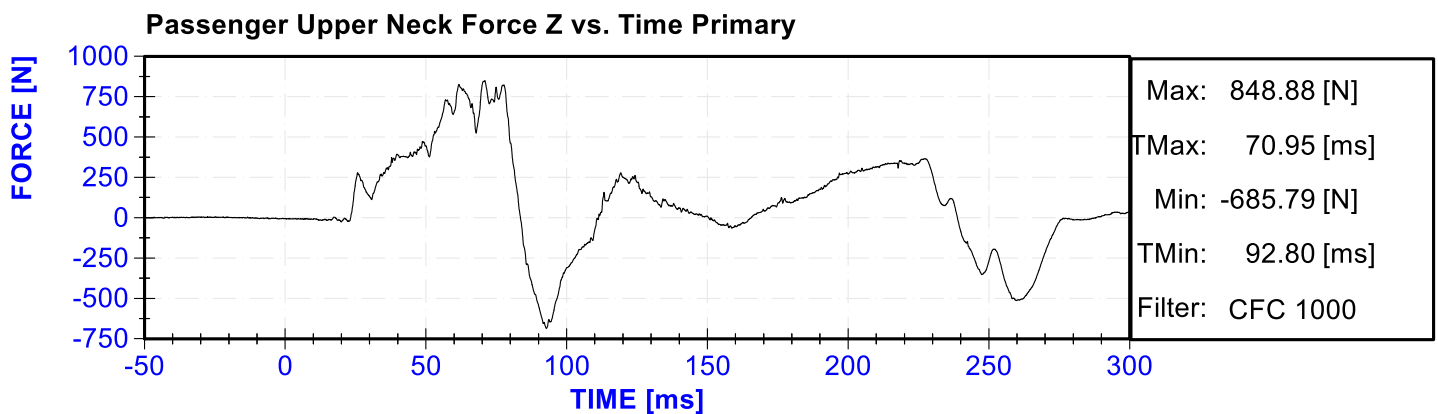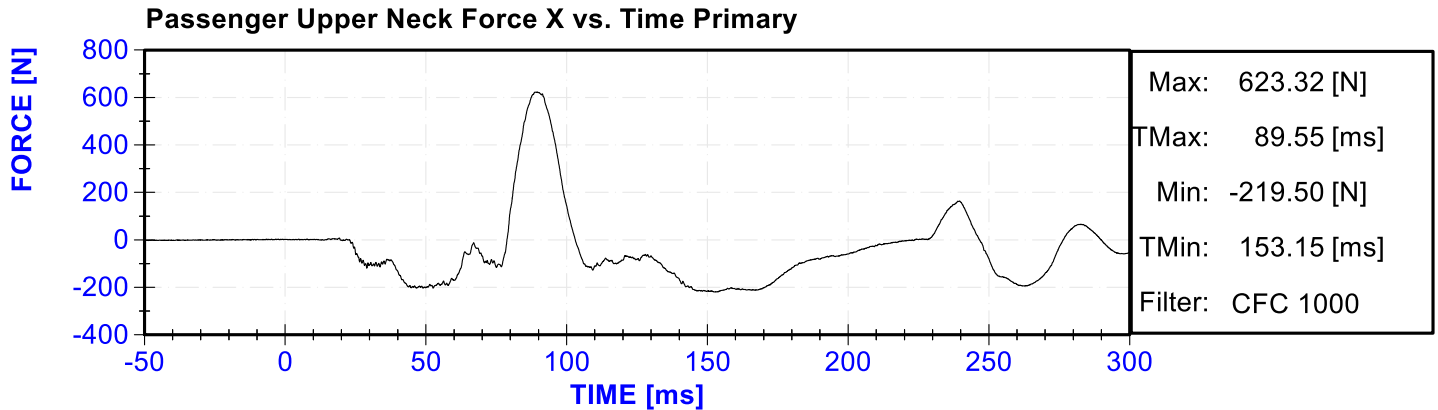

Passenger Left Femur Force vs. Time

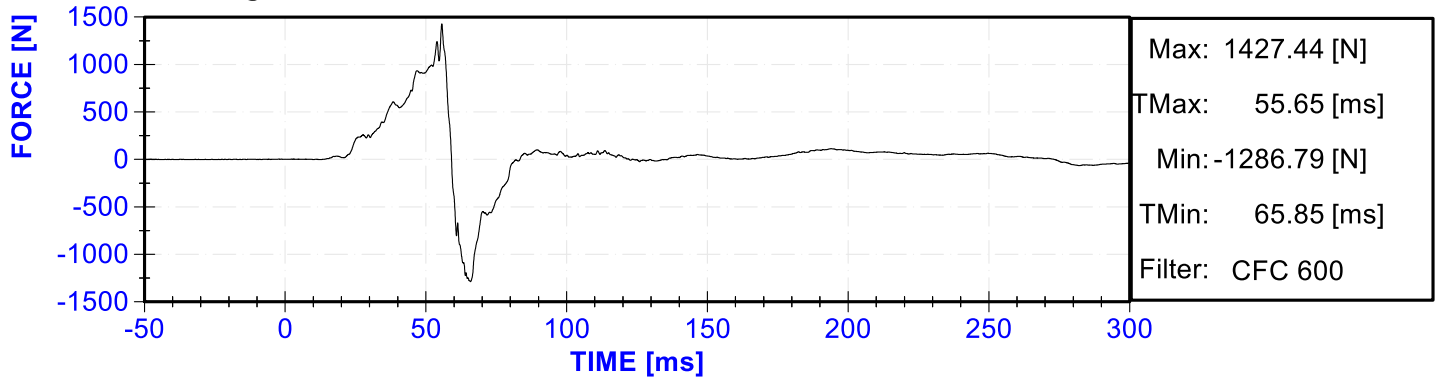

Passenger Right Femur Force vs. Time

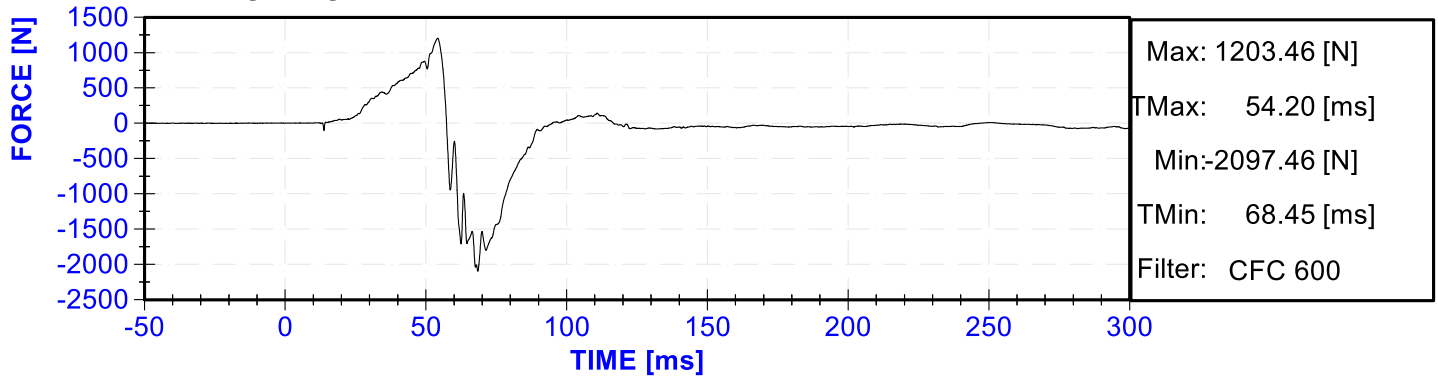

APPENDIX C

DUMMY CALIBRATION AND PERFORMANCE VERIFICATION DATA

CALIBRATION TEST RESULTS

PRE-TEST

HYBRID III 50TH PERCENTILE MALE - DRIVER ATD

SERIAL NO: 142




External Measurements - Hybrid 3 - 50th Male

Technician: K. Dutton

Date: 07/11/2019

Dummy Serial Number: 142

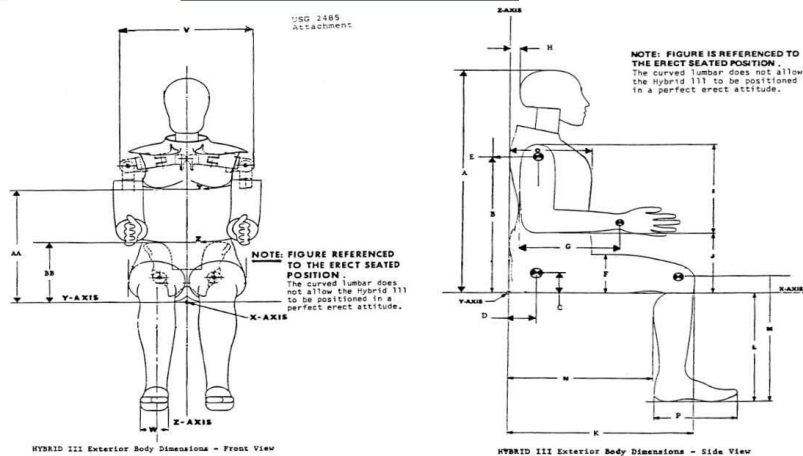

Symbol	Description	Specification (in)		Result (in)	Pass/Fail
A	Sitting Height	34.6	35.0	34.8	Pass
B	Shoulder Pivot Height	19.9	20.5	20.3	Pass
C	H-Point Height	3.3	3.5	3.4	Pass
D	H-Point from Backline	5.3	5.5	5.4	Pass
E	Shoulder Pivot from Backline	3.3	3.7	3.5	Pass
F	Thigh Clearance	5.5	6.1	5.8	Pass
G	Back of Elbow to Wrist Pivot	11.4	12.0	11.6	Pass
H	Head Back to Backline	1.6	1.8	1.7	Pass
I	Shoulder to Elbow Length	13.0	13.6	13.4	Pass
J	Elbow Rest Height	7.5	8.3	8.0	Pass
K	Buttock to Knee Length	22.8	23.8	23.4	Pass
L	Popliteal Height	16.9	17.9	17.4	Pass
M	Knee Pivot Height	19.1	19.7	19.4	Pass
N	Buttock Popliteal Length	17.8	18.8	18.4	Pass
O	Chest Depth without Jacket	8.4	9.0	8.7	Pass
P	Foot Length (right)	9.9	10.5	10.3	Pass
V	Shoulder Breadth	16.3	17.2	16.7	Pass
W	Foot Breadth	3.6	4.2	3.9	Pass
Y	Chest Circumference with Jacket	38.2	39.4	38.9	Pass
Z	Waist Circumference	32.9	34.1	33.7	Pass
AA	Reference Location (Chest Circumference)	16.9	17.1	17.0	Pass
BB	Reference Location (Waist Circumference)	8.9	9.1	9.0	Pass


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K.Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.0	Pass
Humidity	10	70	%	57.0	Pass
Resultant Acceleration	225	275	g's	264.8	Pass
Oscillation	0	10	%	3.7	Pass
Lateral Acceleration	-15	15	g's	4.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P58998	4/19/2019	10/18/2019
Y Accelerometer	ENDEVCO 7264CT	AC-P51722	4/19/2019	10/18/2019
Z Accelerometer	ENDEVCO 7264CT	AC-P58997	4/19/2019	10/18/2019

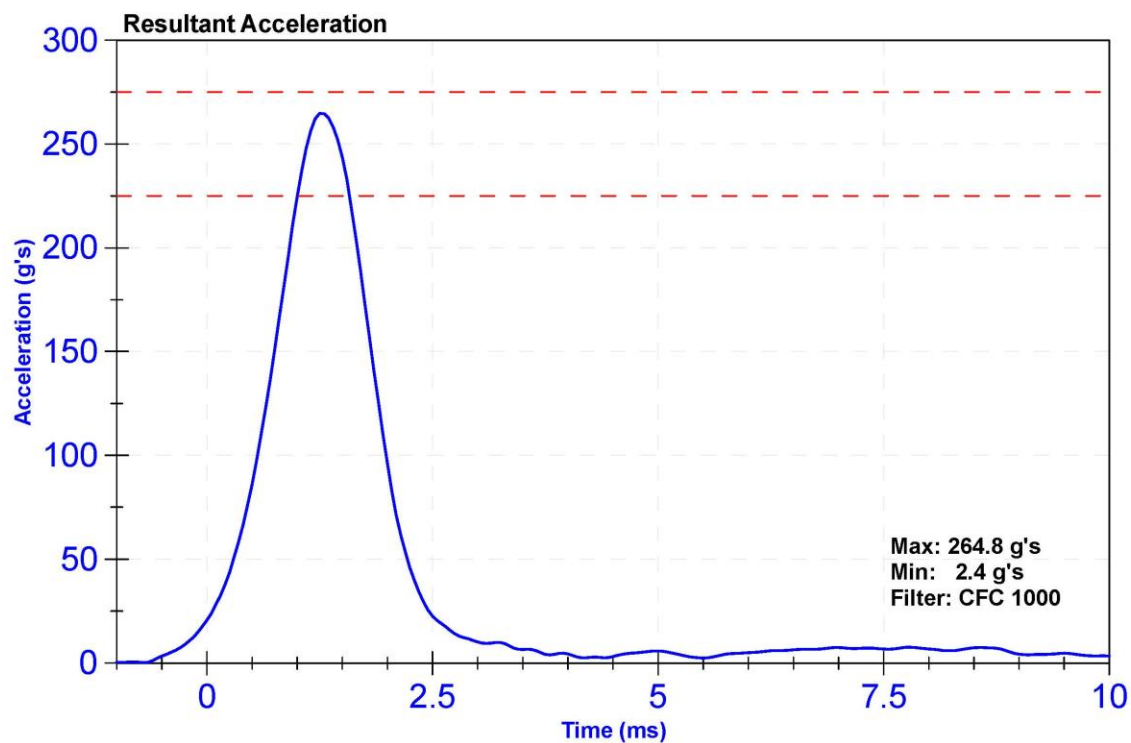

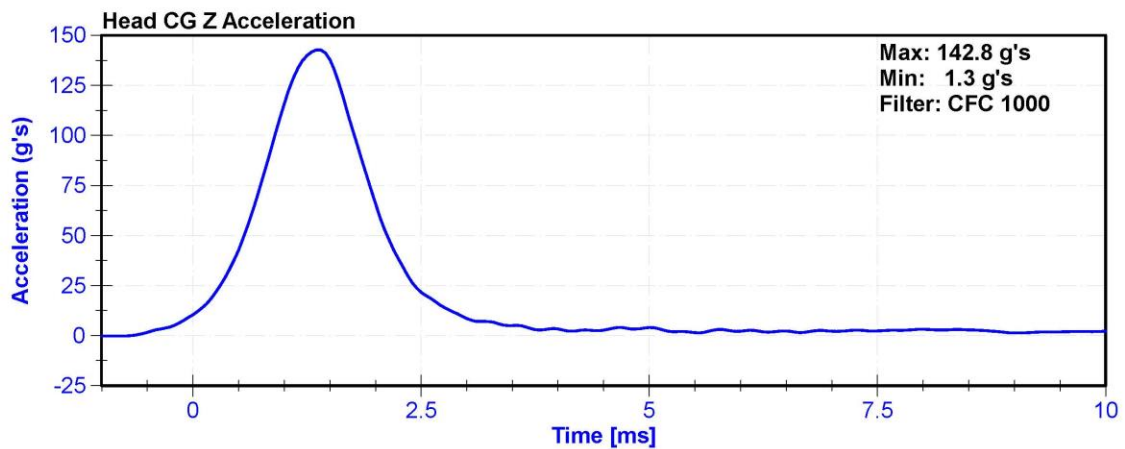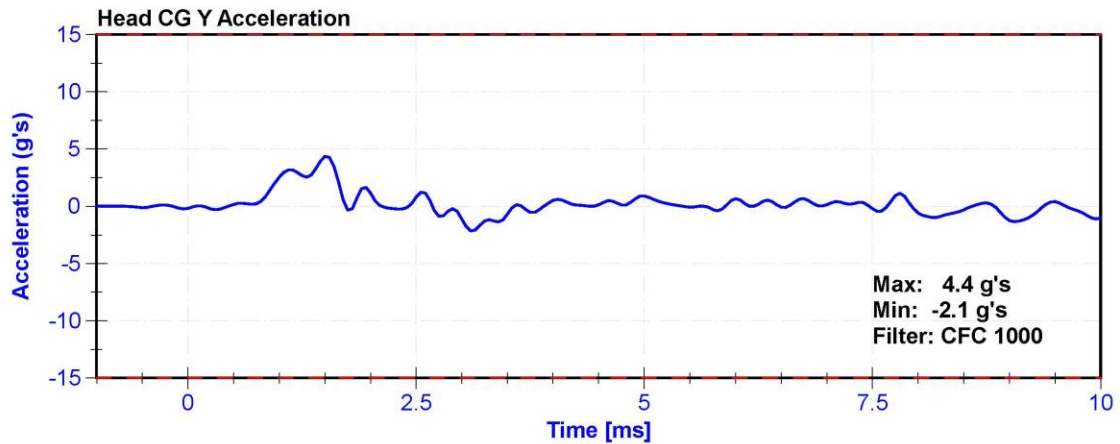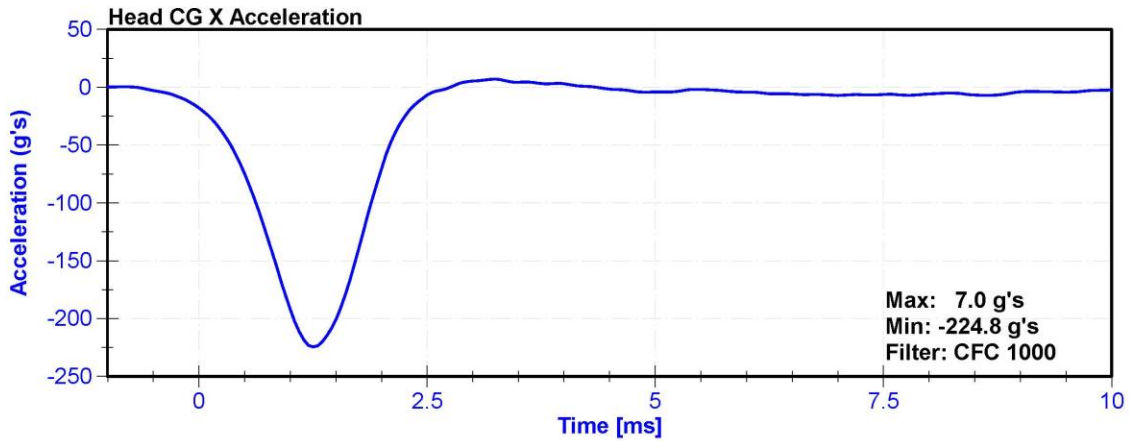



ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K.Brogan


Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	57.0	Pass
Velocity	6.89	7.13	m/s	6.903	Pass
Pendulum Deceleration at 10ms	22.5	27.5	g's	22.79	Pass
Pendulum Deceleration at 20ms	17.6	22.6	g's	22.40	Pass
Pendulum Deceleration at 30ms	12.5	18.5	g's	13.35	Pass
Max. Pendulum Deceleration After 30ms	0	29	g's	23.1	Pass
Pendulum Deceleration Time to 5 g's	34	42	ms	40.2	Pass
Maximum D Plane Rotation	64	78	deg	66.2	Pass
Time to Maximum Rotation	57	64	ms	62.9	Pass
Rotation Decay to Zero	113	127	ms	122.3	Pass
Moment About Occipital Condyle	88.1	108.4	Nm	91.95	Pass
Time to Maximum Moment	47	58	ms	53.0	Pass
Moment Decay to Zero	97	107	ms	104.3	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	11/15/2018	11/15/2019
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	11/15/2018	11/15/2019
Upper Neck Load Cell	FTSS IF-205	LC-161Fx	9/28/2018	9/28/2019

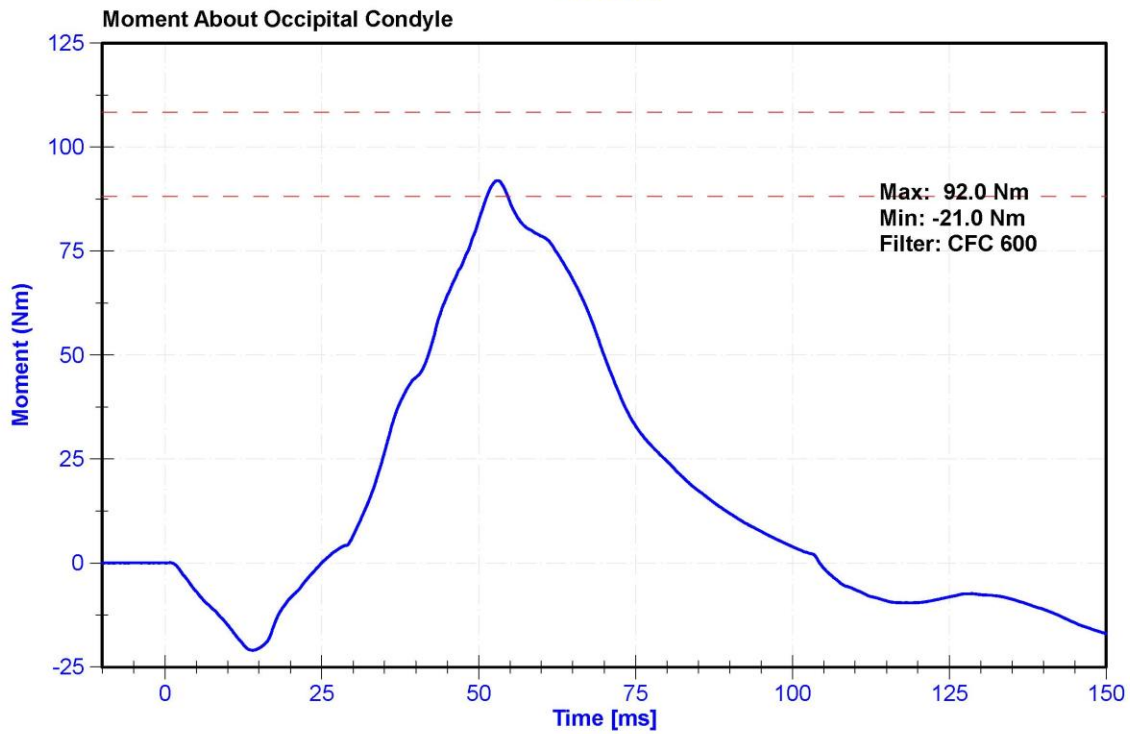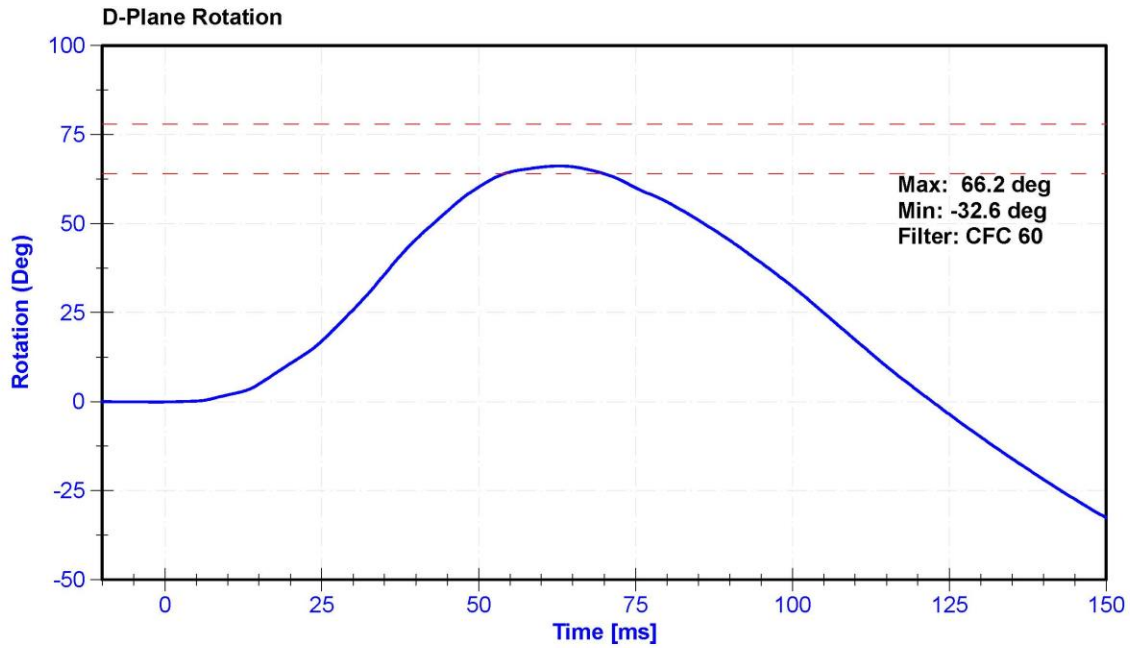

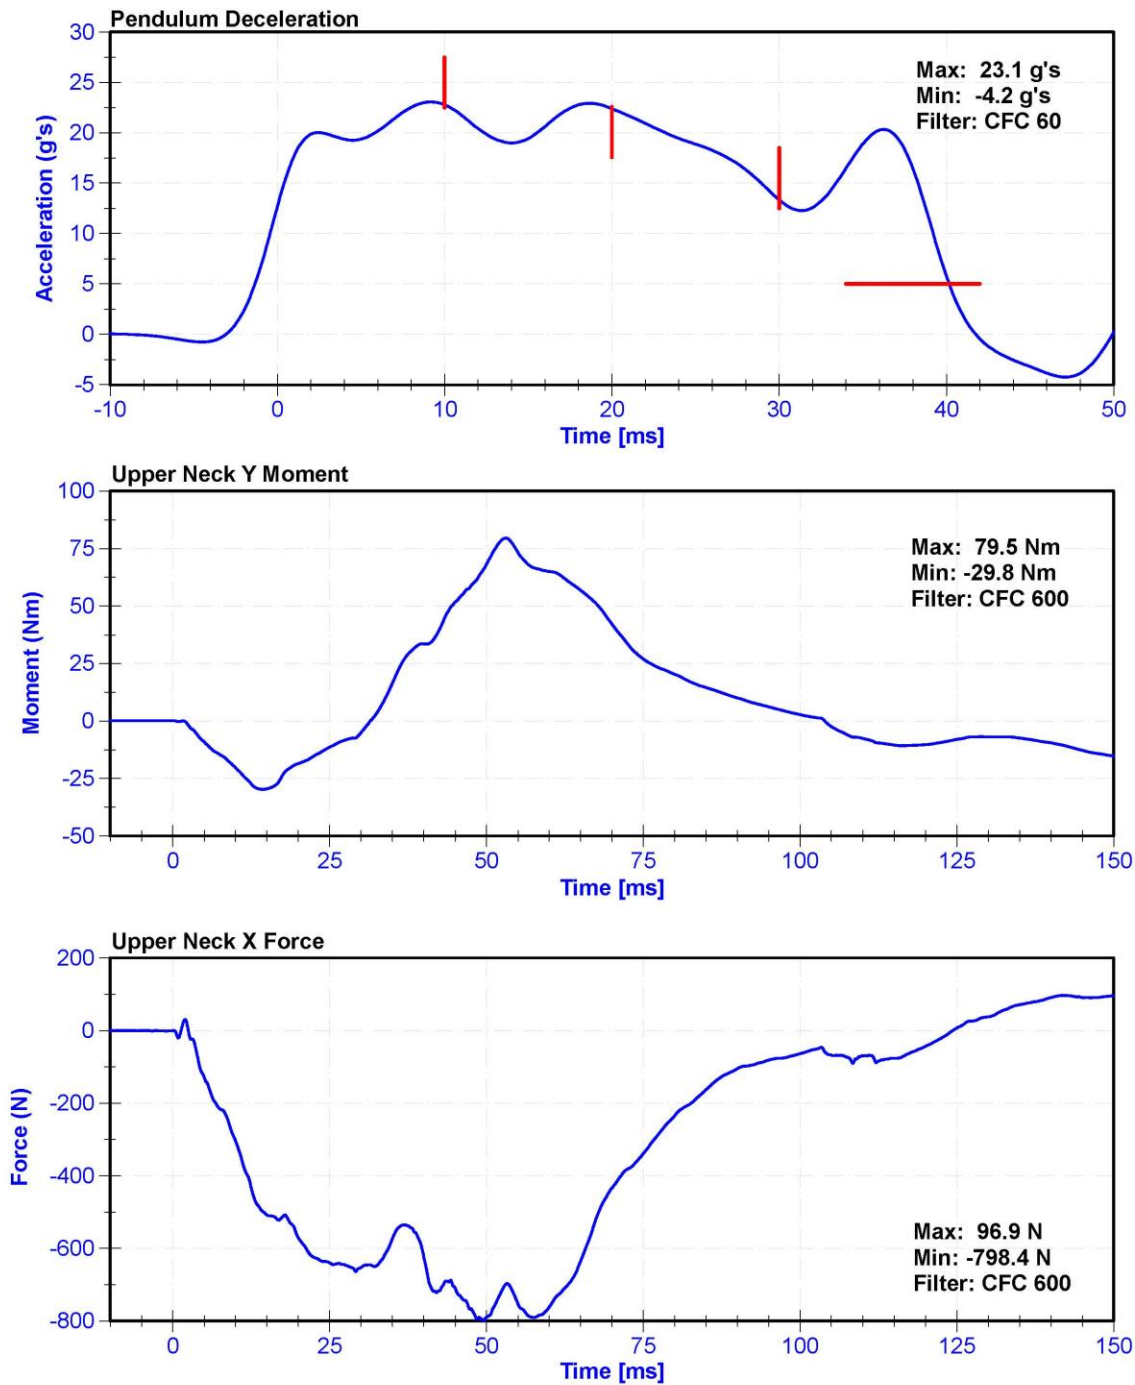



ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K.Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.2	Pass
Humidity	10	70	%	50	Pass
Velocity	5.94	6.19	m/s	5.964	Pass
Pendulum Deceleration at 10ms	17.2	21.2	g's	20.09	Pass
Pendulum Deceleration at 20ms	14	19	g's	17.7	Pass
Pendulum Deceleration at 30ms	11	16	g's	14.3	Pass
Max. Pendulum Deceleration After 30ms	0	22	g's	20.2	Pass
Pendulum Deceleration Time to 5 g's	38	46	ms	43.7	Pass
Maximum D Plane Rotation	81	106	deg	87.6	Pass
Time to Maximum Rotation	72	82	ms	77.4	Pass
Rotation Decay to Zero	147	174	ms	160.3	Pass
Minimum Moment About OC	-80	-52.9	Nm	-67.01	Pass
Time to Minimum Moment	65	79	ms	68.9	Pass
Moment Decay to Zero	120	148	ms	139.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	11/15/2018	11/15/2019
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	11/15/2018	11/15/2019
Upper Neck Load Cell	FTSS IF-205	LC-161Fx	9/28/2018	9/28/2019

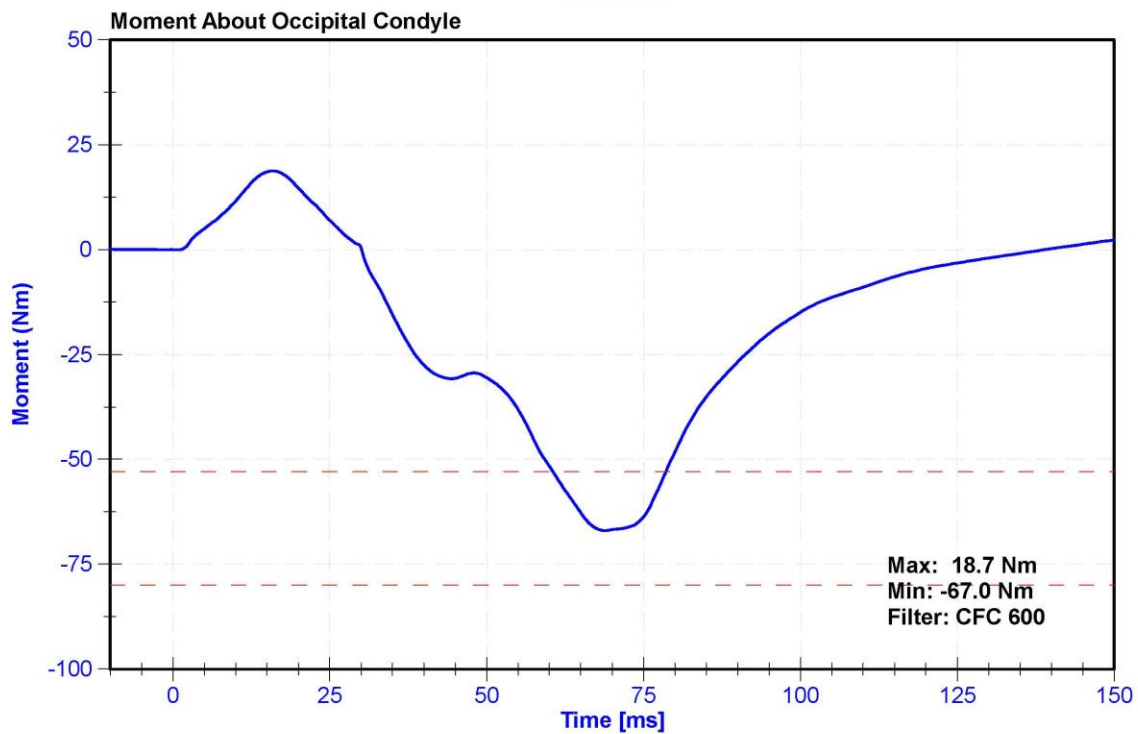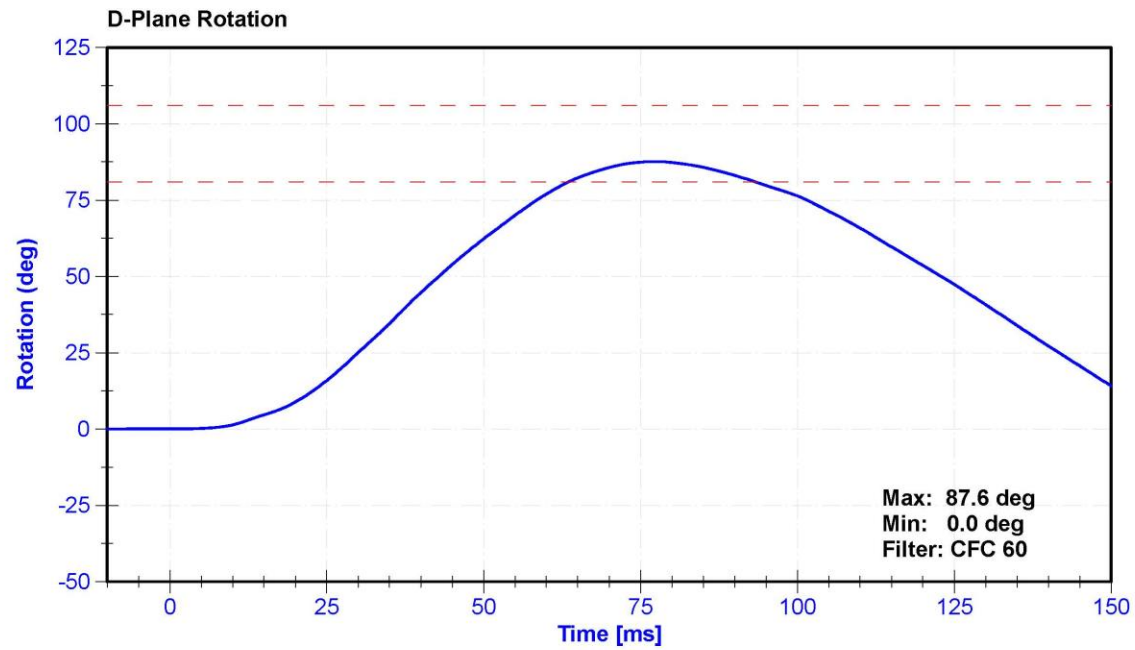

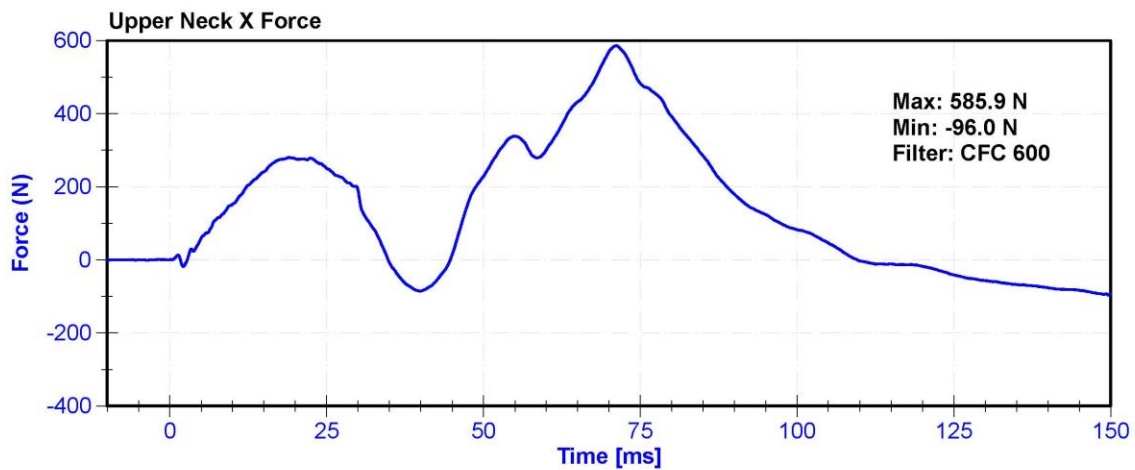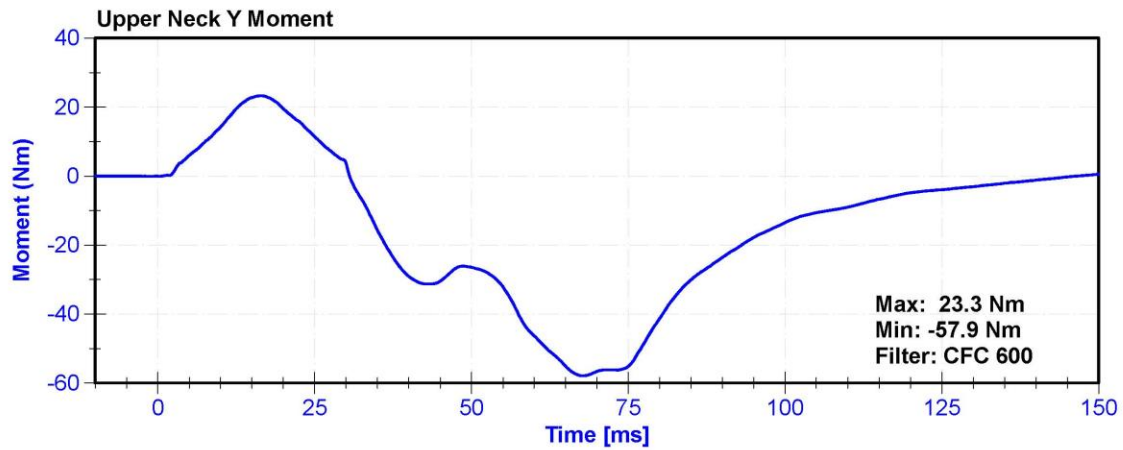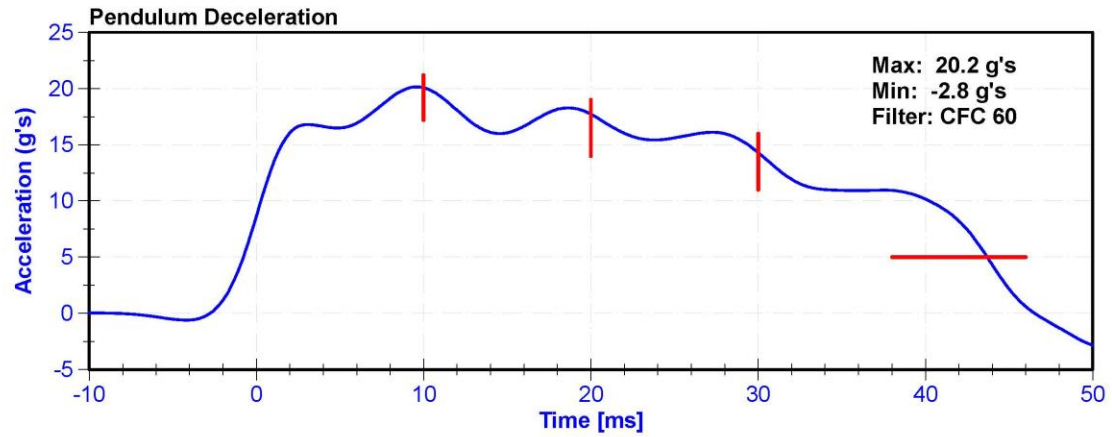


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K.Brogan



Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.9	Pass
Humidity	10	70	%	59	Pass
Velocity	6.59	6.83	m/s	6.597	Pass
Chest Displacement	-72.6	-63.5	mm	-67.86	Pass
Resistive Force	5160	5894	N	5466.9	Pass
Hysteresis	65	85	%	71.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P71278	12/14/2018	12/14/2019
Chest Potentiometer	JDK 6209-2038	DS-142	10/22/2018	10/22/2019

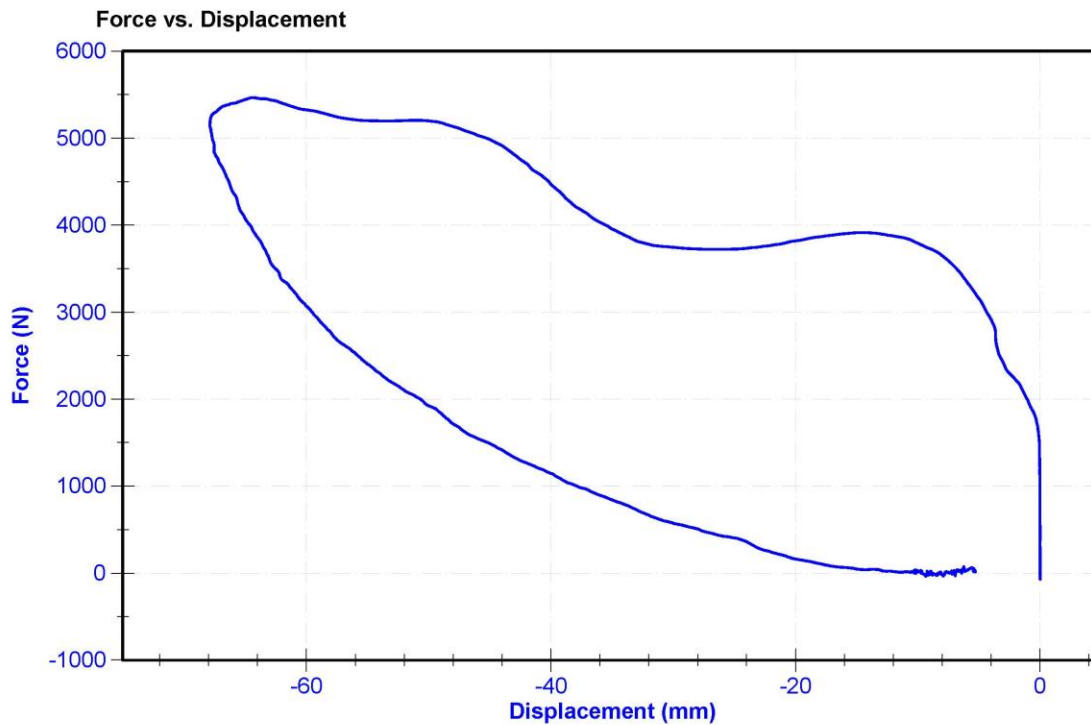

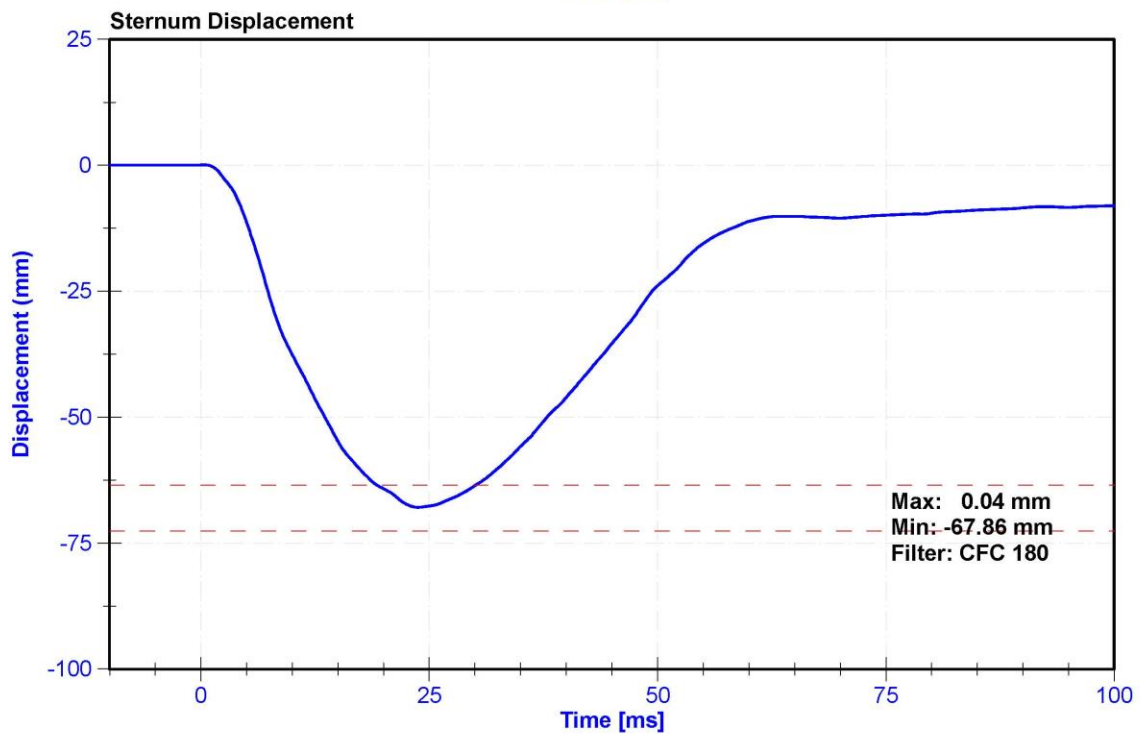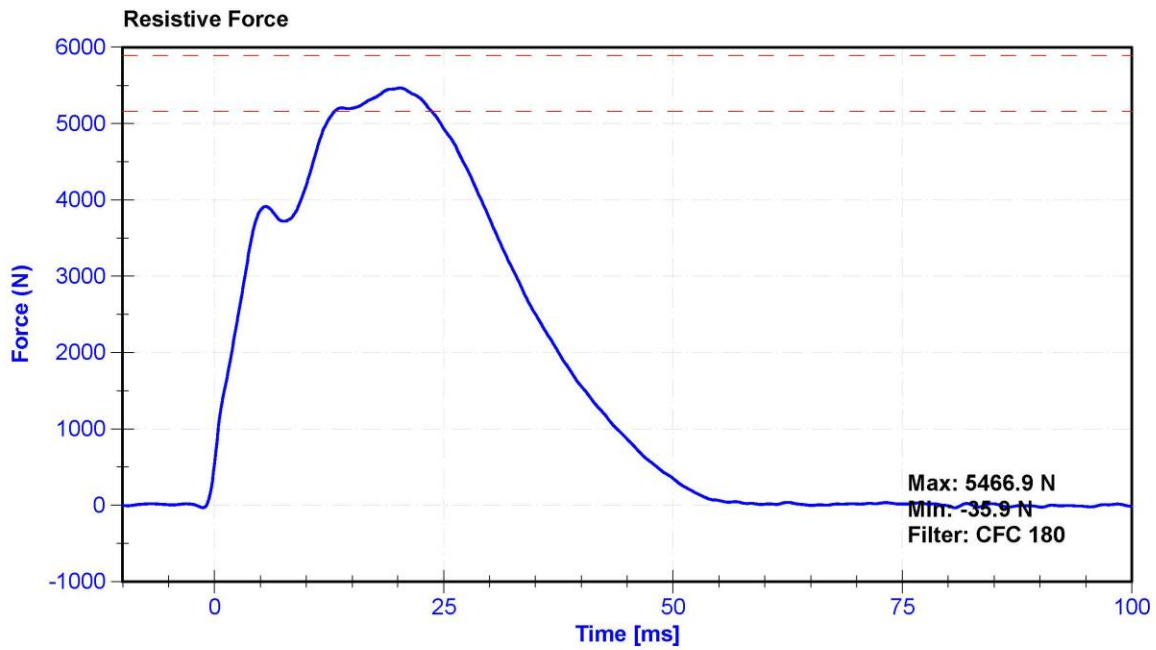

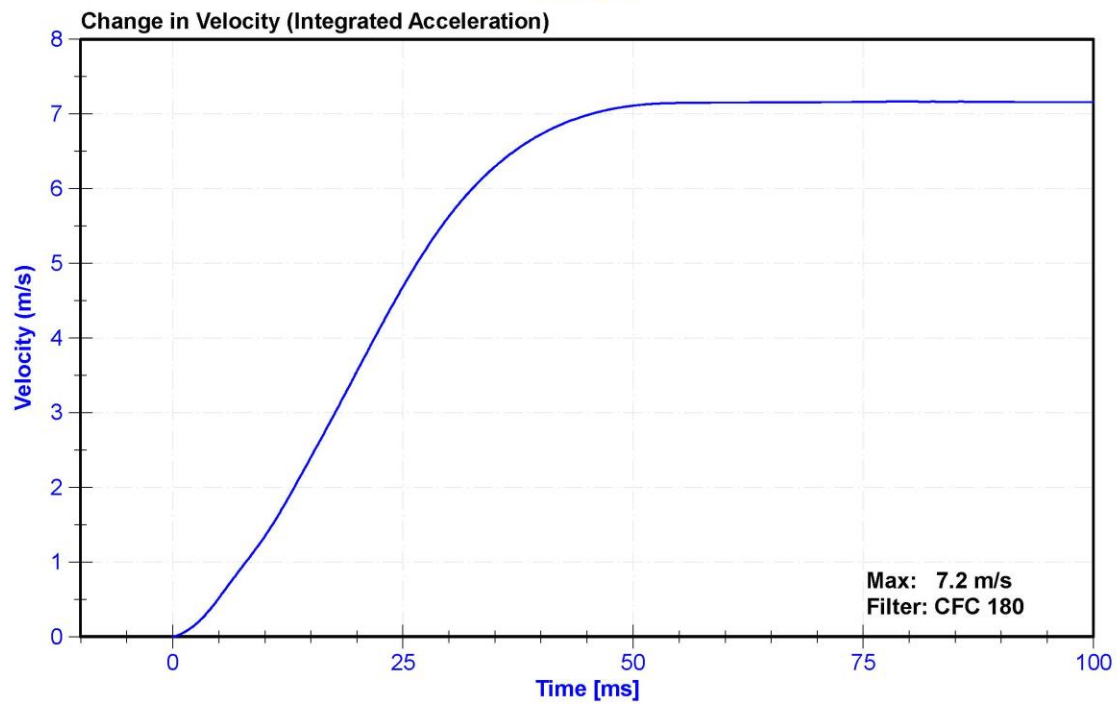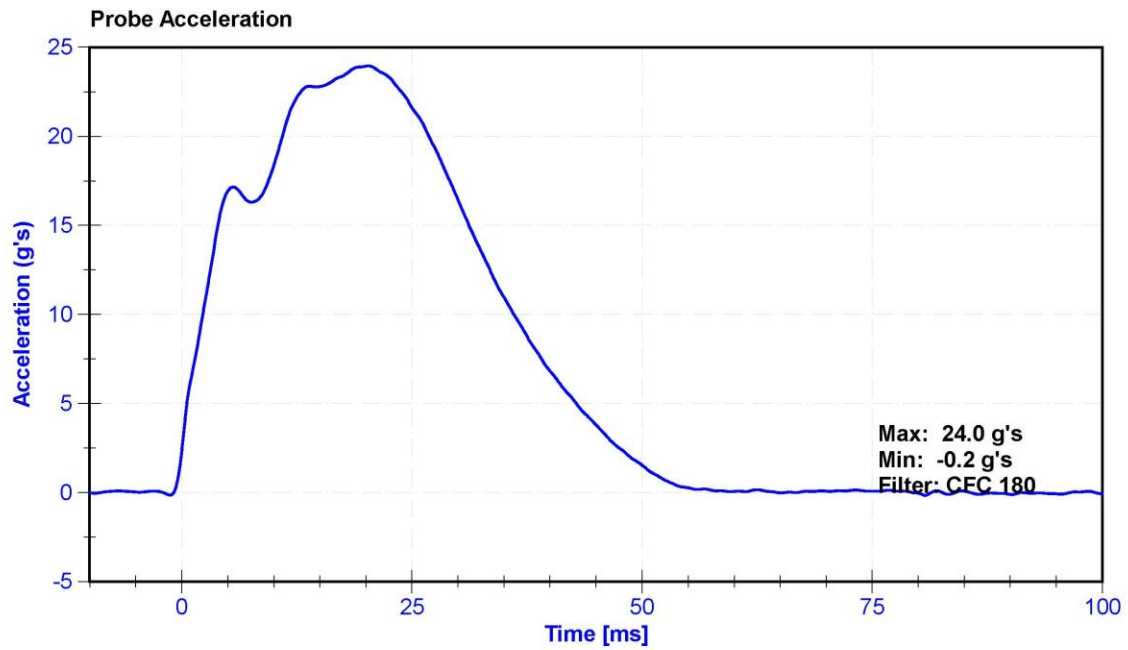


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	22.1	Pass
Humidity	10	70	%	58.0	Pass
Average Velocity	5	10	deg/s	7.5	Pass
Angle at 203Nm	40	50	deg	44.8	Pass
Moment at 30 degrees	0	94.9	Nm	80.3	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	2018-09-18	2019-09-18
Load Cell	Key Trans 2301-02	LC-115 My	2018-09-06	2019-09-06

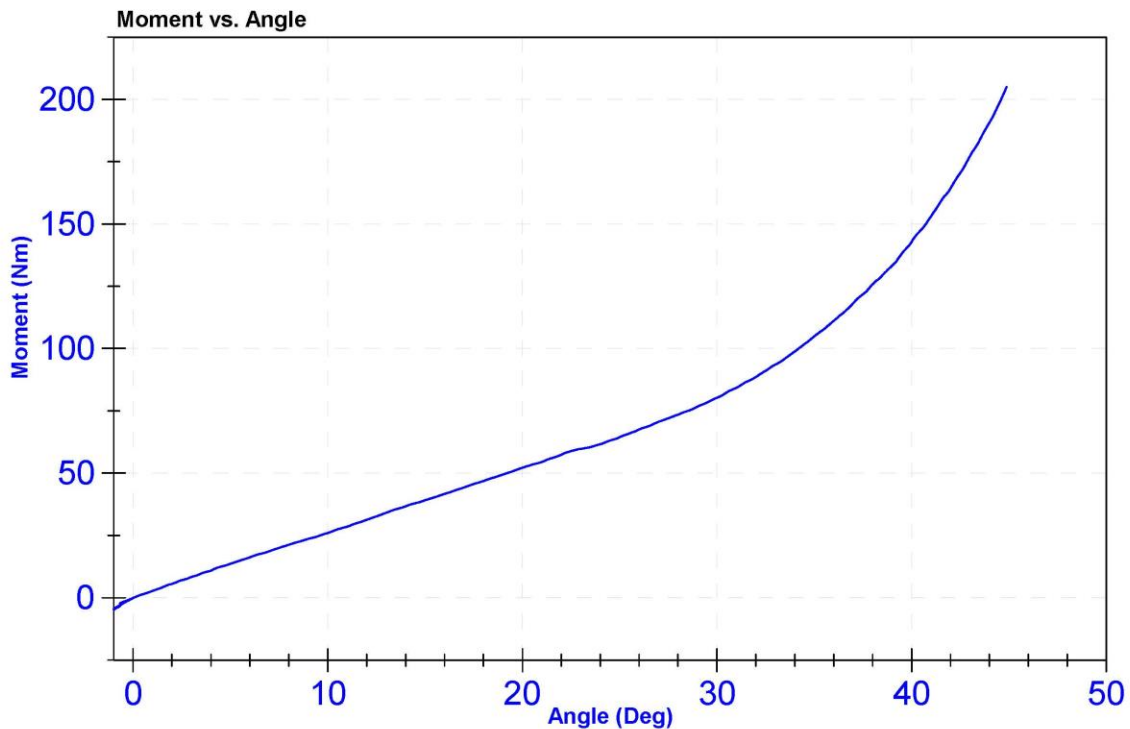


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.6	Pass
Humidity	10	70	%	58.0	Pass
Average Velocity	5	10	deg/s	7.4	Pass
Angle at 203Nm	40	50	deg	46.6	Pass
Moment at 30 degrees	0	94.9	Nm	84.6	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	2018-09-18	2019-09-18
Load Cell	Key Trans 2301-02	LC-115 My	2018-09-06	2019-09-06

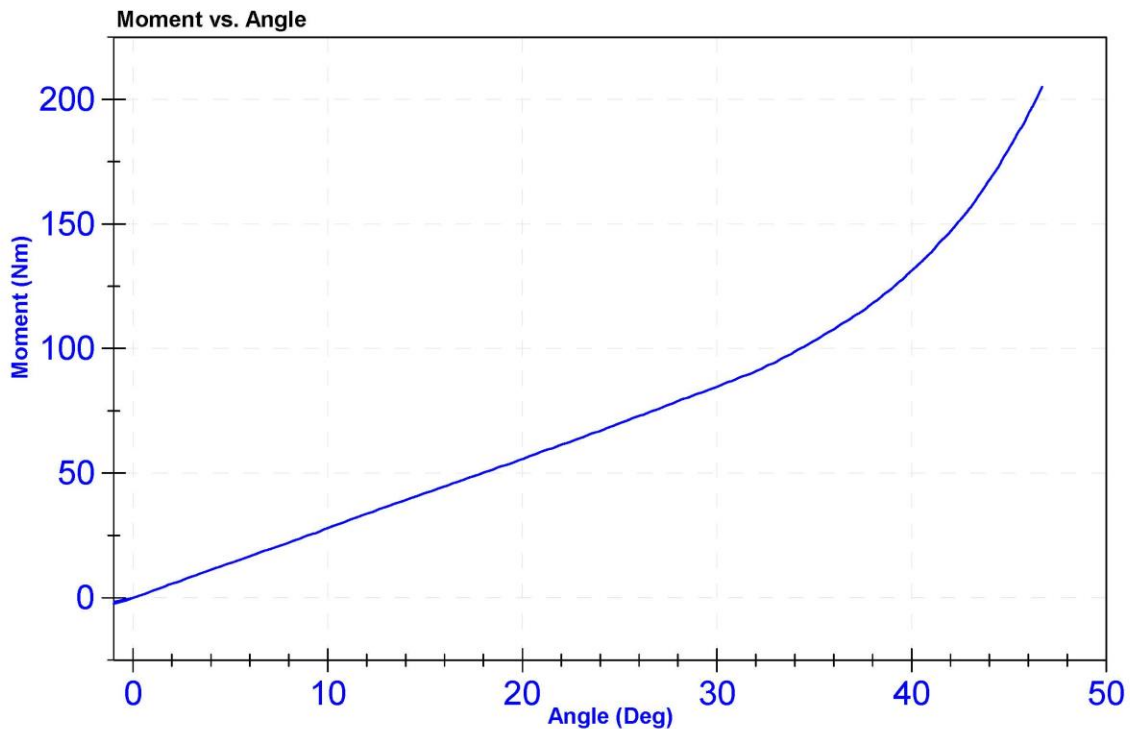


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K.Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.8	Pass
Humidity	10	70	%	60	Pass
Velocity	2.07	2.13	m/s	2.121	Pass
Maximum Resistive Force	4720	5780	N	5768.2	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	2/21/2019	8/22/2019

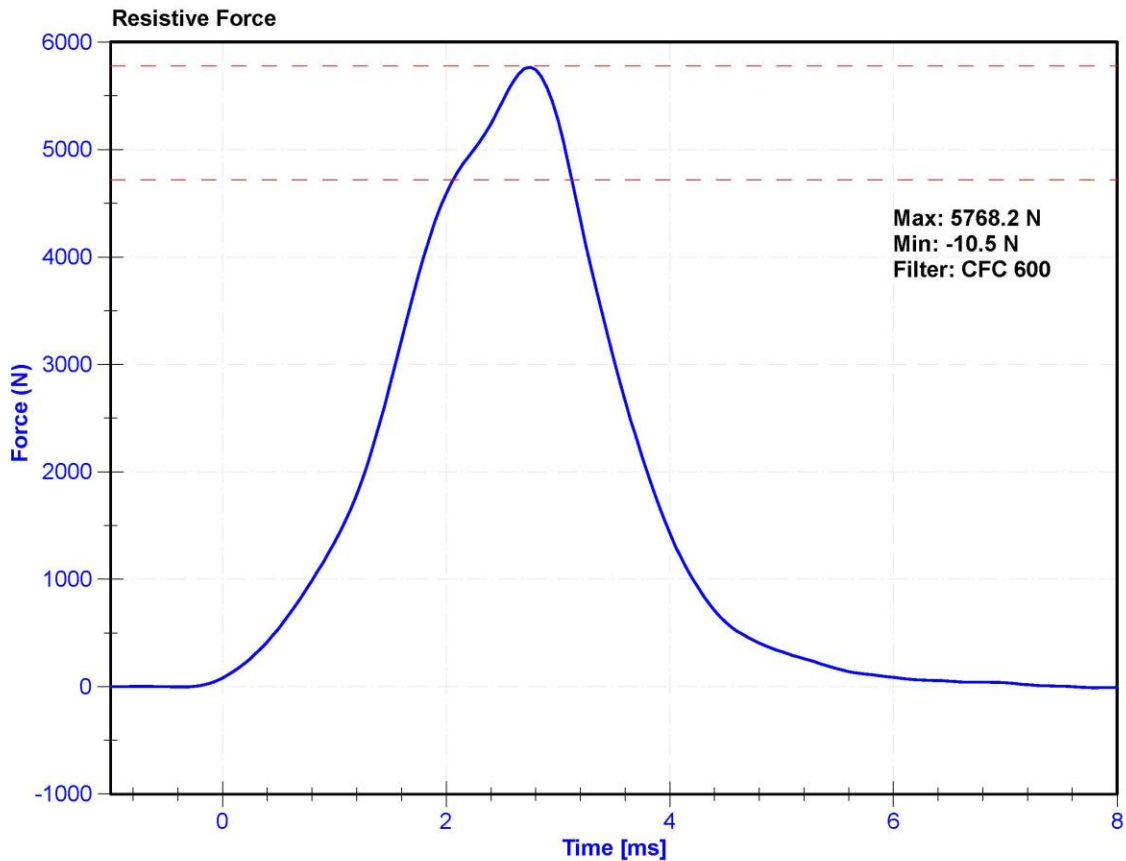

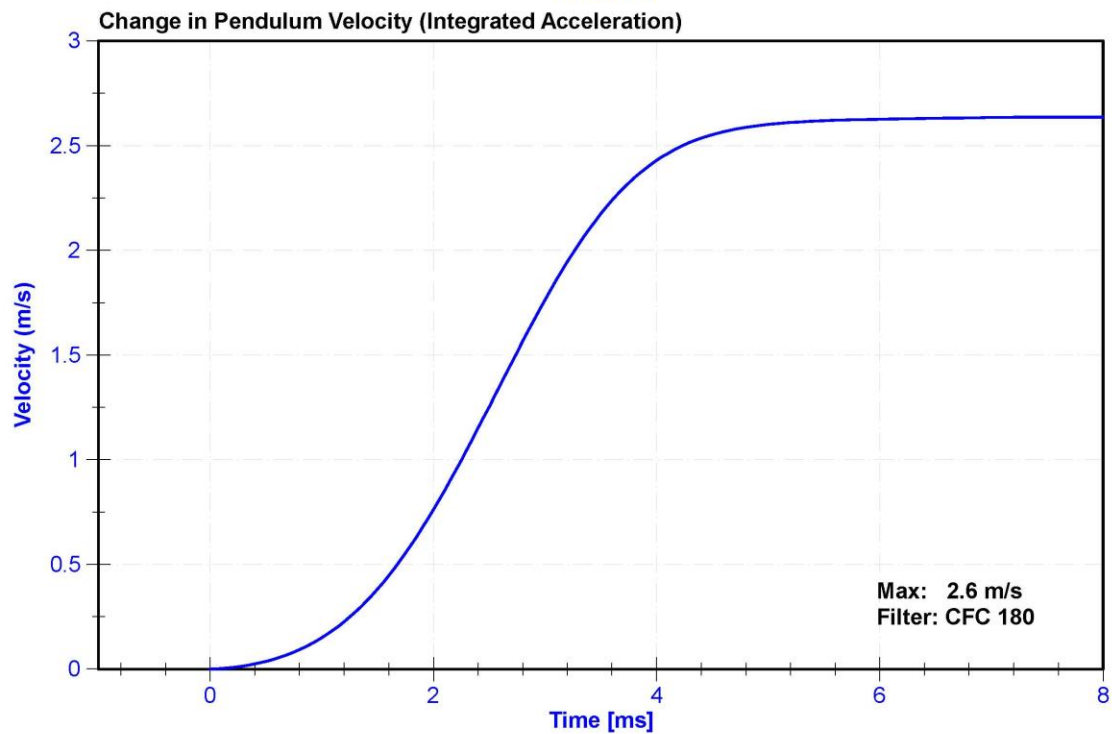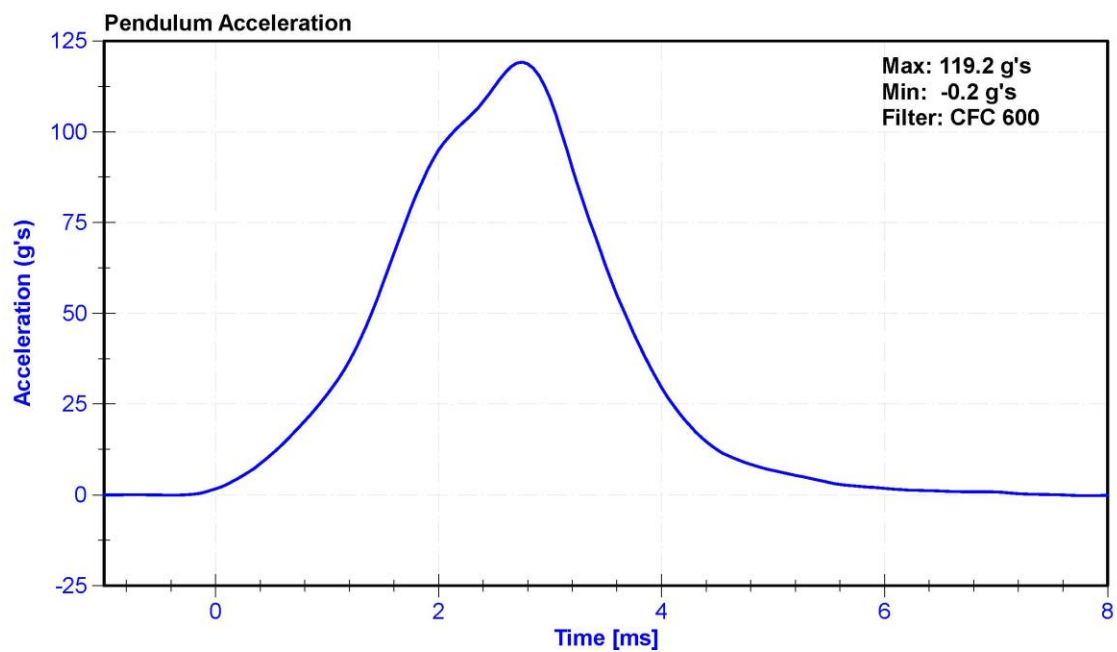


ATD Manufacturer	Humanetics	Test Technician	C. Mantell
ATD Serial Number	142	Laboratory Supervisor	K.Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.8	Pass
Humidity	10	70	%	50	Pass
Velocity	2.07	2.13	m/s	2.121	Pass
Maximum Resistive Force	4720	5780	N	5407.2	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	2/21/2019	8/22/2019

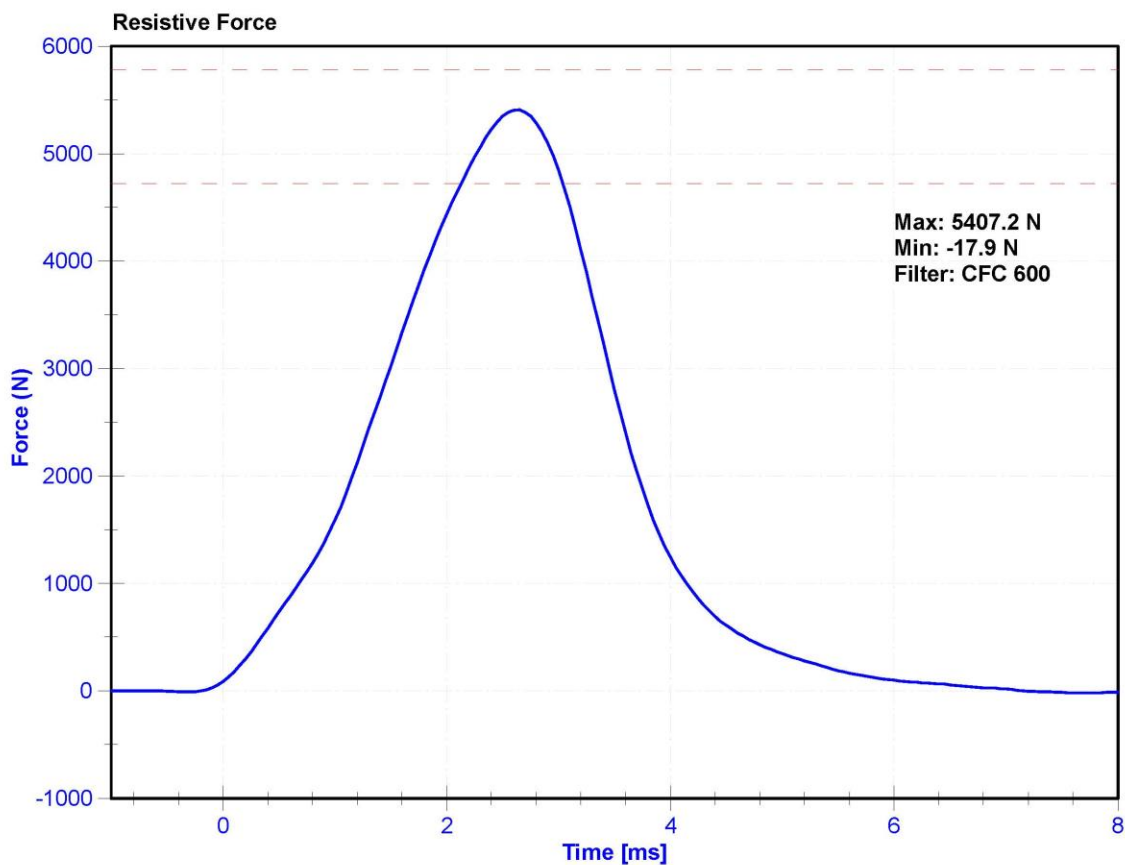

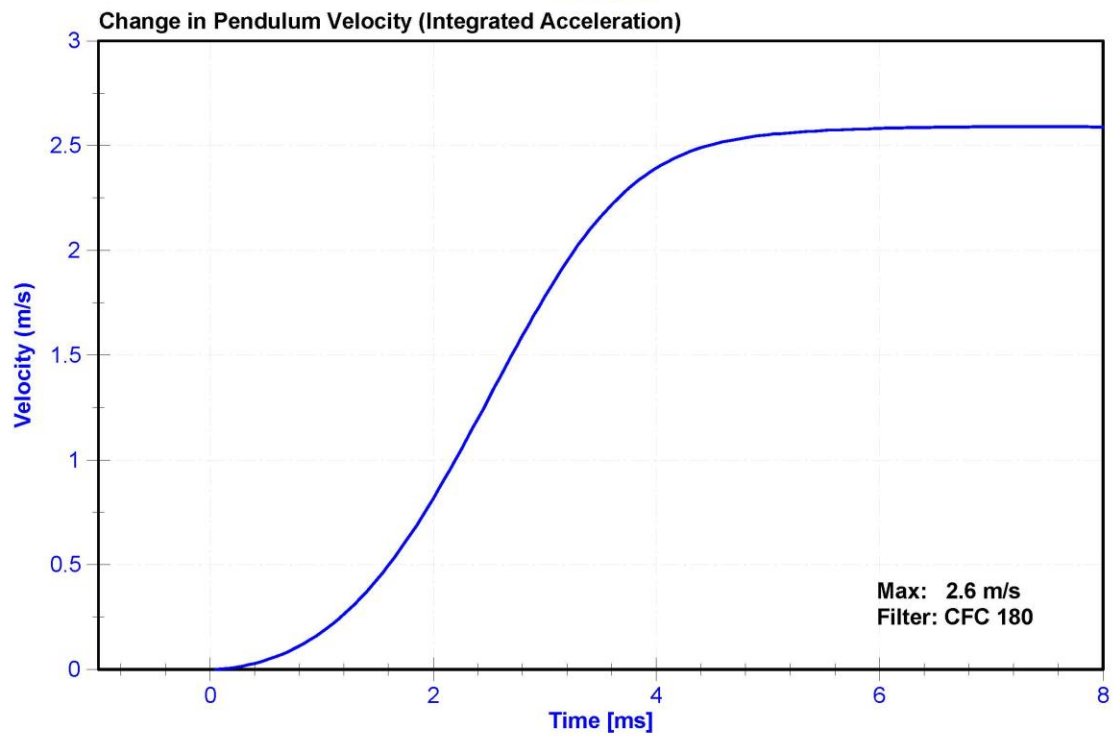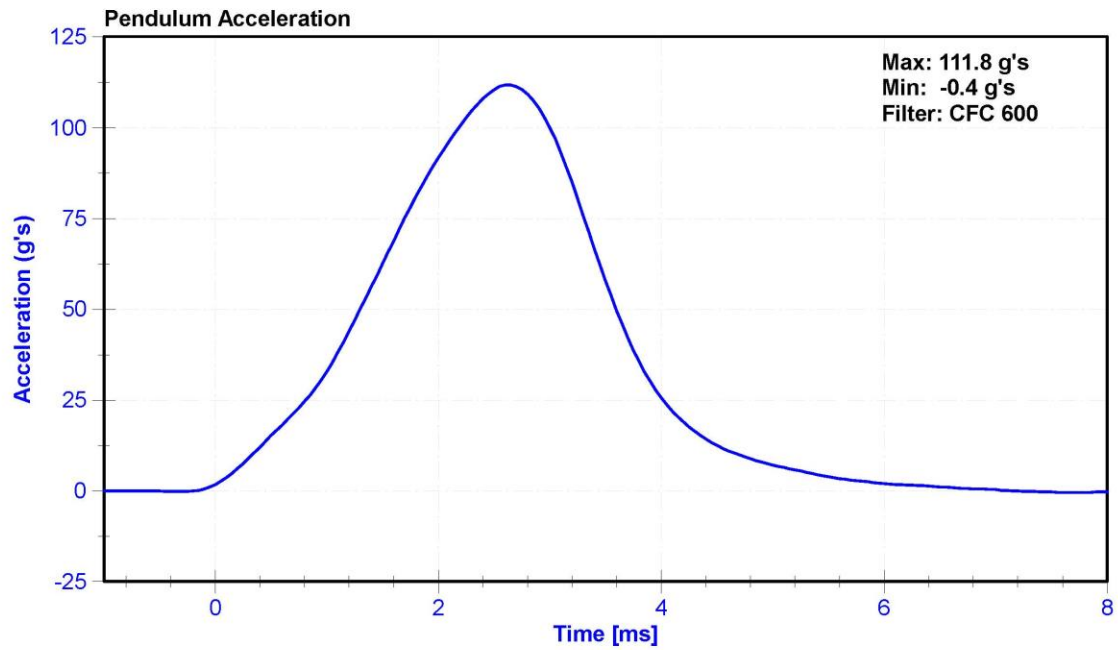

CALIBRATION TEST RESULTS

PRE-TEST

HYBRID III 5TH PERCENTILE - PASSENGER ATD

SERIAL NO: 288





External Measurements - Hybrid 3 - 5th Female

Technician: K. Dutton

Date: 07/09/2019

Dummy Serial Number: 288

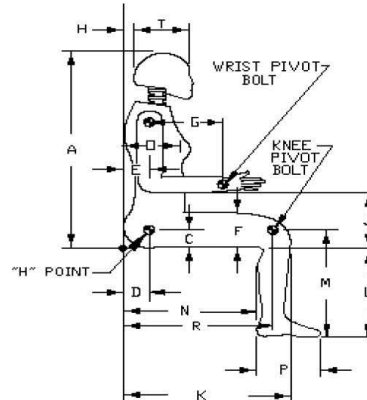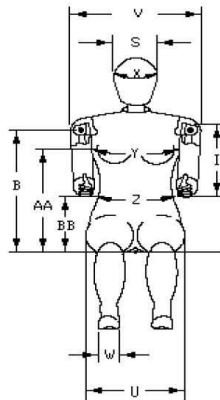

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	775	800	787	Pass
B	Shoulder Pivot Height	432	457	450	Pass
C	H-Point Height	81	86	84	Pass
D	H-Point from Backline	145	150	147	Pass
E	Shoulder Pivot from Backline	69	84	77	Pass
F	Thigh Clearance	119	135	126	Pass
G	Back of Elbow to Wrist Pivot	244	259	255	Pass
H	Head Back to Backline	43	48	45	Pass
I	Shoulder to Elbow Length	277	297	284	Pass
J	Elbow Rest Height	183	203	190	Pass
K	Buttock to Knee Length	521	546	538	Pass
L	Popliteal Height	356	376	365	Pass
M	Knee Pivot Height	394	419	405	Pass
N	Buttock Popliteal Length	414	439	430	Pass
O	Chest Depth without Jacket	175	191	180	Pass
P	Foot Length (right)	219	234	221	Pass
R	Buttock To Knee Pivot Length	457	483	465	Pass
S	Head Breadth	137	147	142	Pass
T	Head Depth	178	188	183	Pass
U	Hip Breadth	300	315	310	Pass
V	Shoulder Breadth	351	366	361	Pass
W	Foot Breadth	79	94	85	Pass
X	Head Circumference	528	549	537	Pass
Y	Chest Circumference with Jacket	851	881	865	Pass
Z	Waist Circumference	460	790	777	Pass
AA	Reference Location (Chest Circumference)	333	358	345	Pass
BB	Reference Location (Waist Circumference)	160	170	164	Pass


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	288	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.8	Pass
Humidity	10	70	%	56	Pass
Resultant Acceleration	250	300	g's	270.6	Pass
Oscillation	0	10	%	2.2	Pass
Lateral Acceleration	-15	15	g's	6.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P52133	4/9/2019	10/8/2019
Y Accelerometer	ENDEVCO 7264	AC-P12359	4/9/2019	10/8/2019
Z Accelerometer	ENDEVCO 7264CT	AC-P58871	4/9/2019	10/8/2019

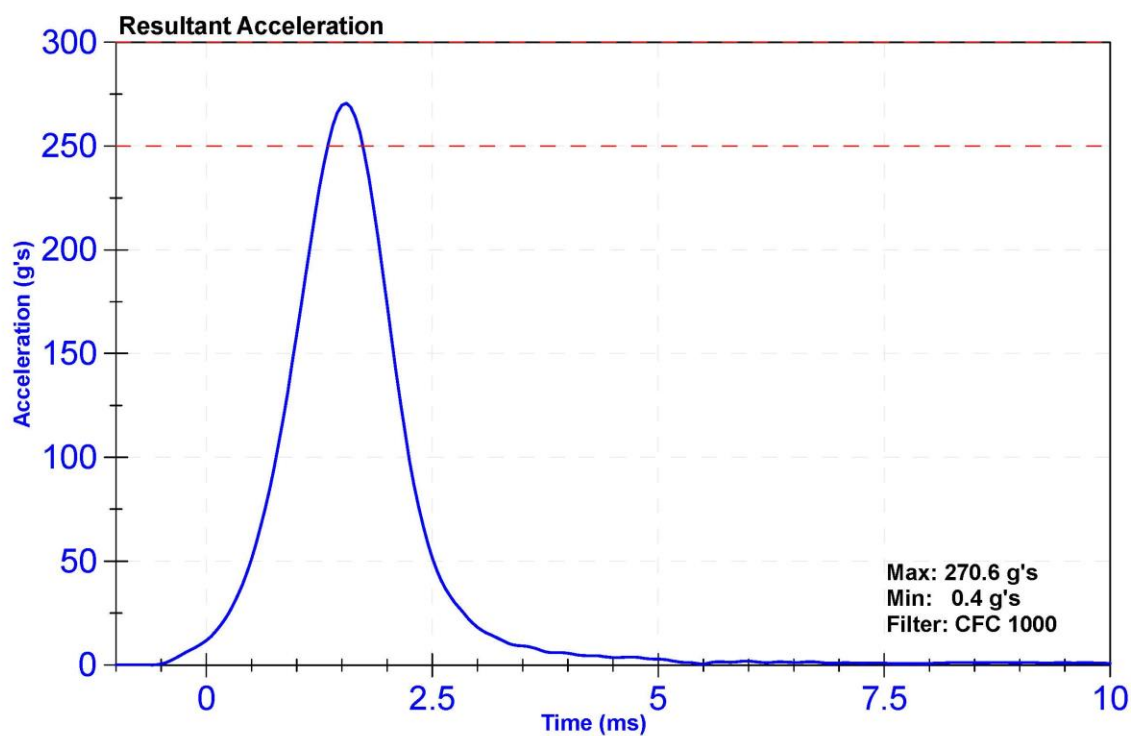

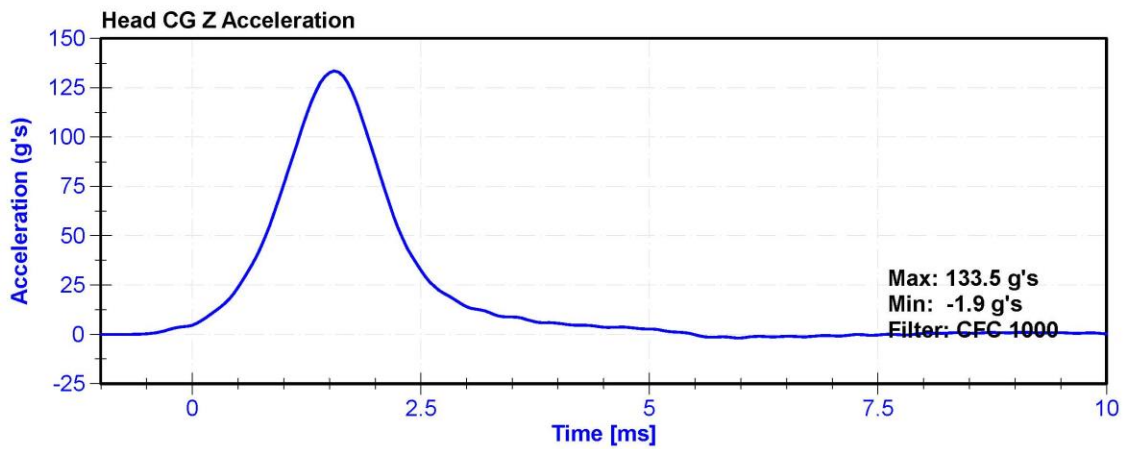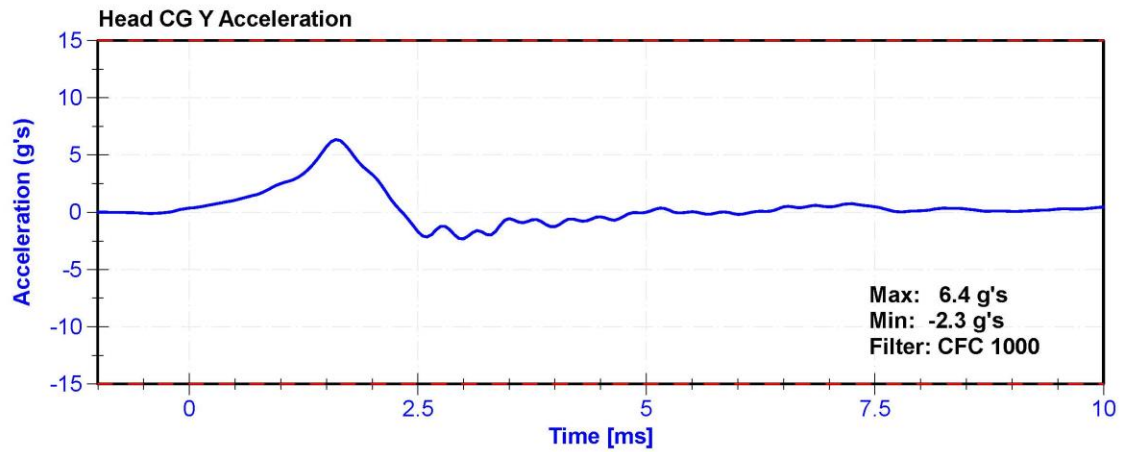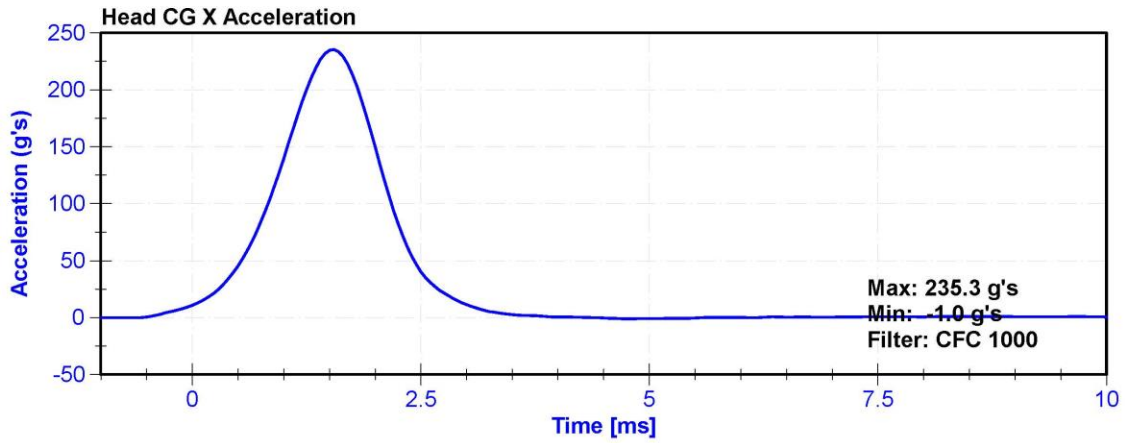


ATD Manufacturer	FTSS	Test Technician	C. Mantell
ATD Serial Number	288	Laboratory Supervisor	K. Brogan



Results


Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	48.5	Pass
Velocity	6.89	7.13	m/s	6.903	Pass
Pendulum Impulse at 10ms	2.1	2.5	m/s	2.35	Pass
Pendulum Impulse at 20ms	4.0	5.0	m/s	4.74	Pass
Pendulum Impulse at 30ms	5.8	7.0	m/s	6.71	Pass
Max D Plane Rotation	77	91	deg	81.6	Pass
Max Moment During Rotation Interval	69	83	Nm	75.0	Pass
Moment Decay to 10.0 Nm	80	100	ms	85.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	11/15/2018	11/15/2019
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	11/15/2018	11/15/2019
Upper Neck Load Cell	DENTON 1716A	LC-1591Fx	9/28/2018	9/28/2019

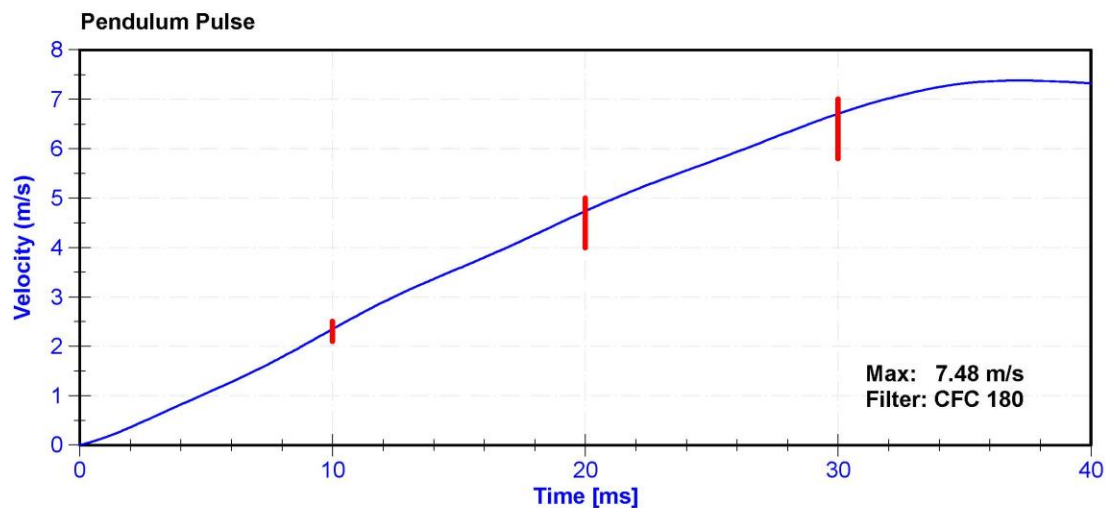

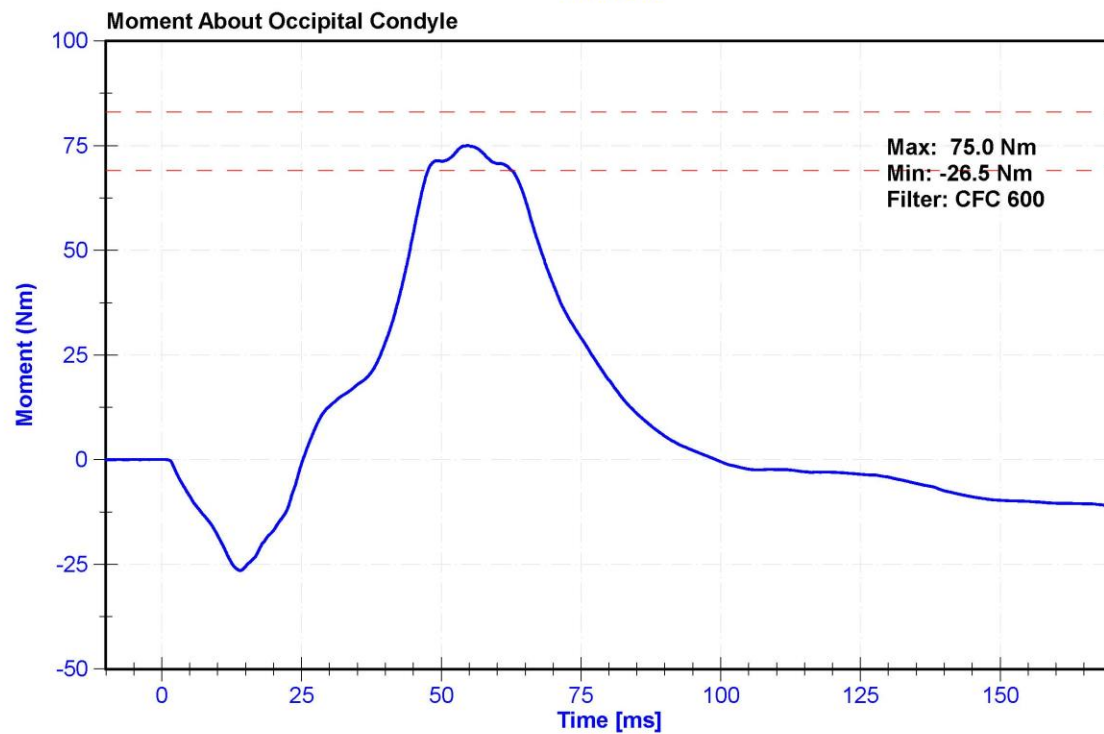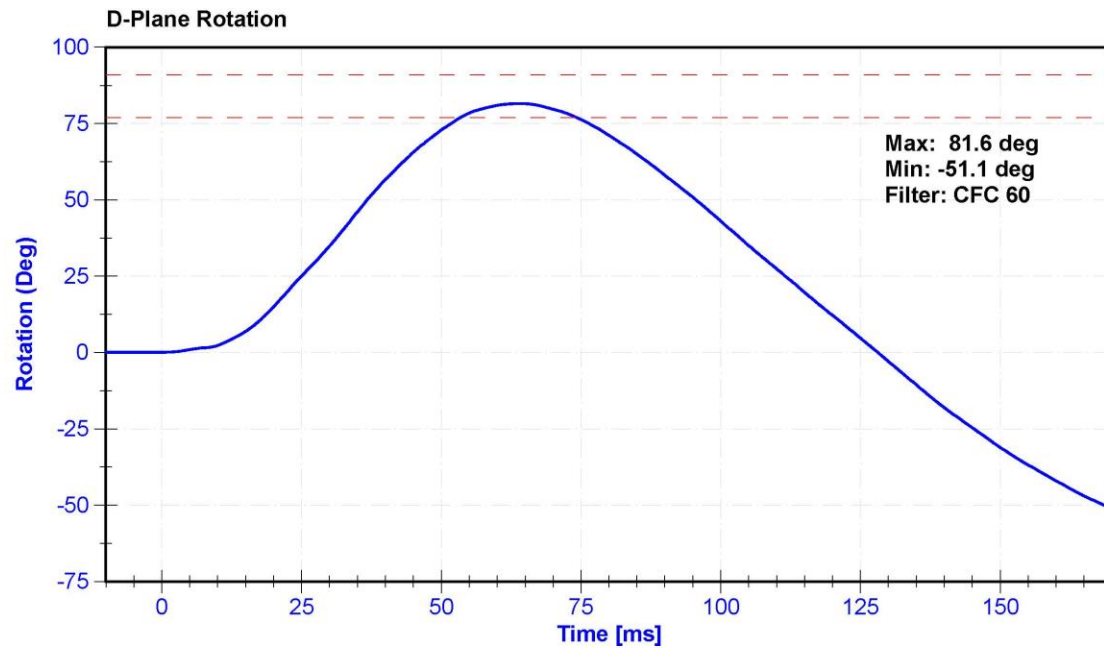

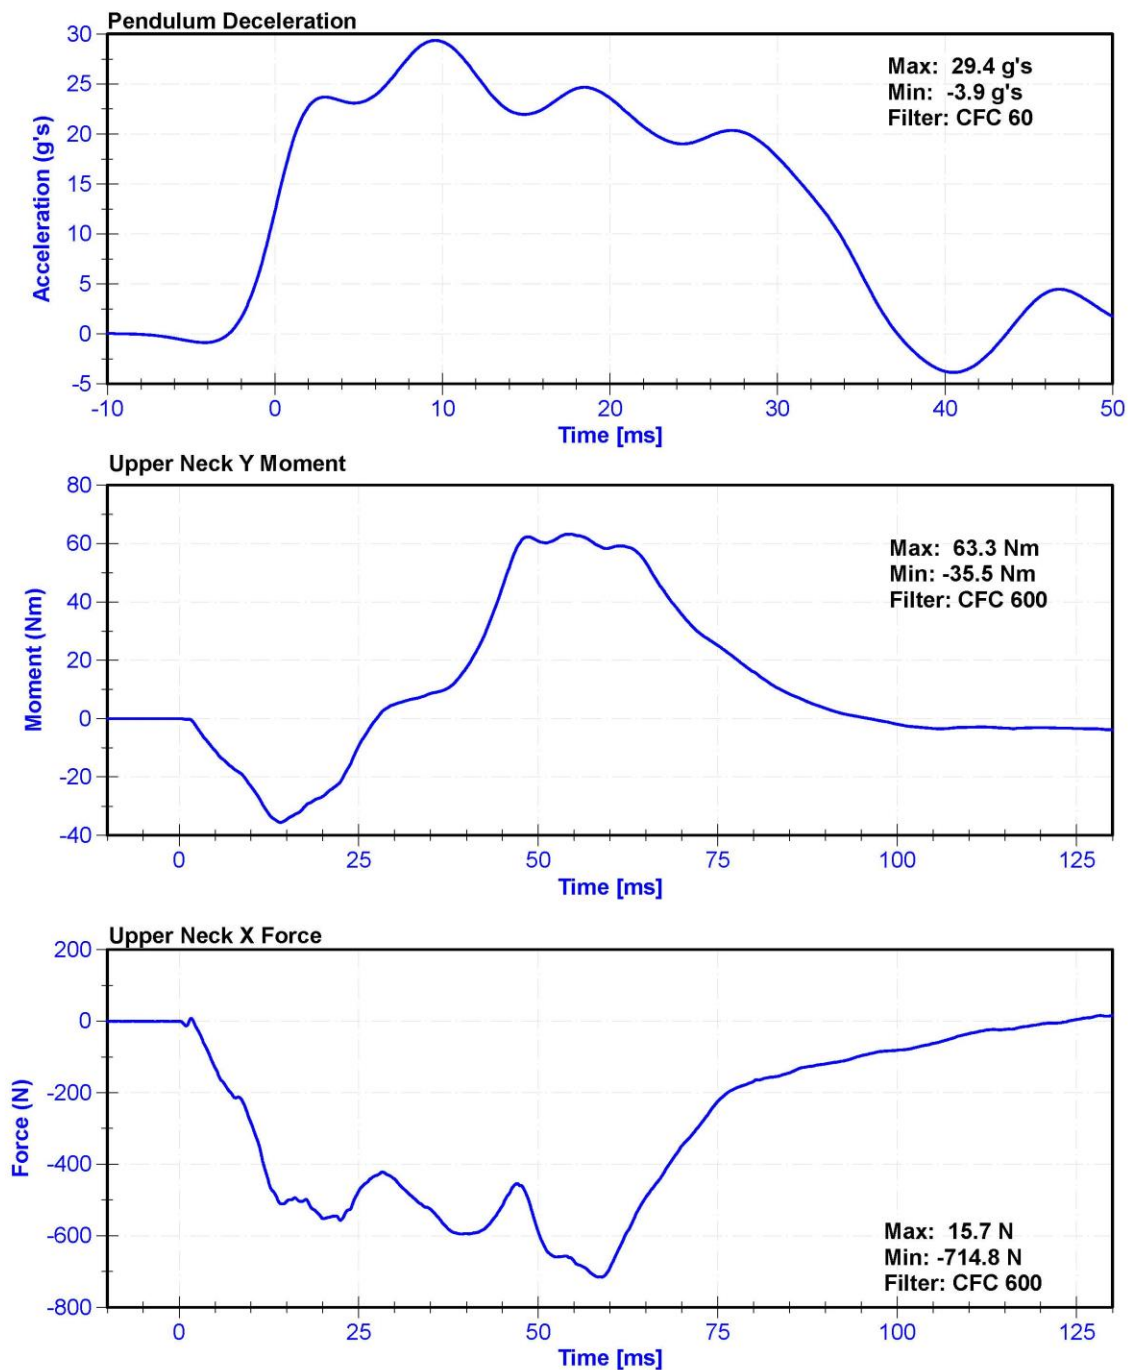


ATD Manufacturer	FTSS	Test Technician	C. Mantell
ATD Serial Number	288	Laboratory Supervisor	K. Brogan



Results


Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	54.8	Pass
Velocity	5.95	6.19	m/s	6.046	Pass
Pendulum Impulse at 10ms	1.5	1.9	m/s	1.72	Pass
Pendulum Impulse at 20ms	3.1	3.9	m/s	3.49	Pass
Pendulum Impulse at 30ms	4.6	5.6	m/s	5.17	Pass
D Plane Rotation	99	114	deg	107.3	Pass
Moment During Rotation Interval	-65	-53	Nm	-58.9	Pass
Moment Decay to -10Nm	94	114	ms	102.6	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	11/15/2018	11/15/2019
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	11/15/2018	11/15/2019
Upper Neck Load Cell	DENTON 1716A	LC-1591Fx	9/28/2018	9/28/2019

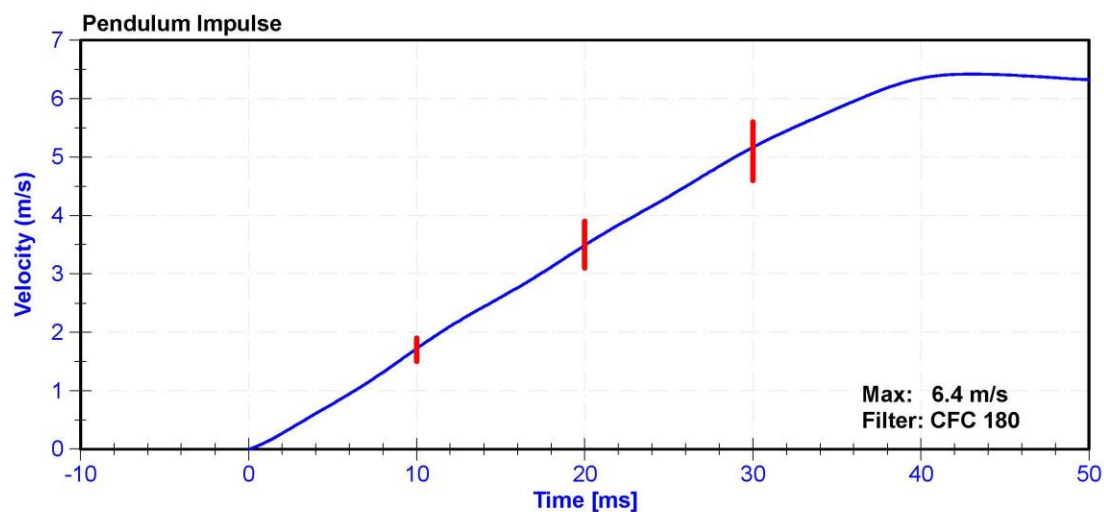

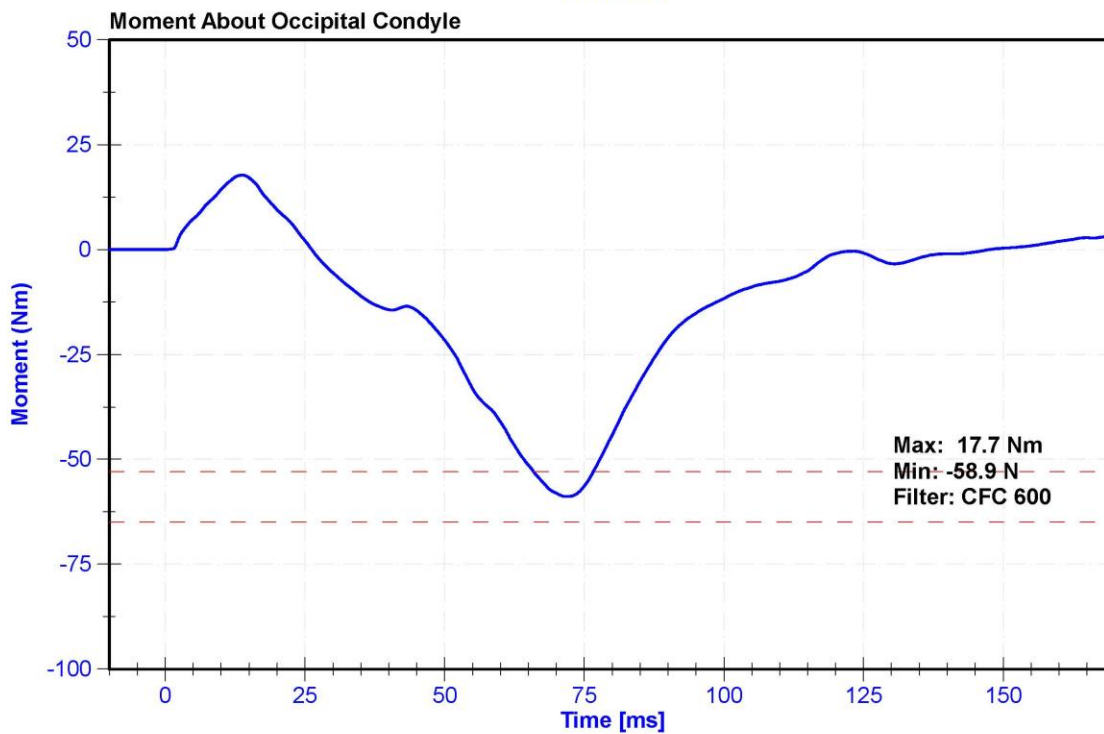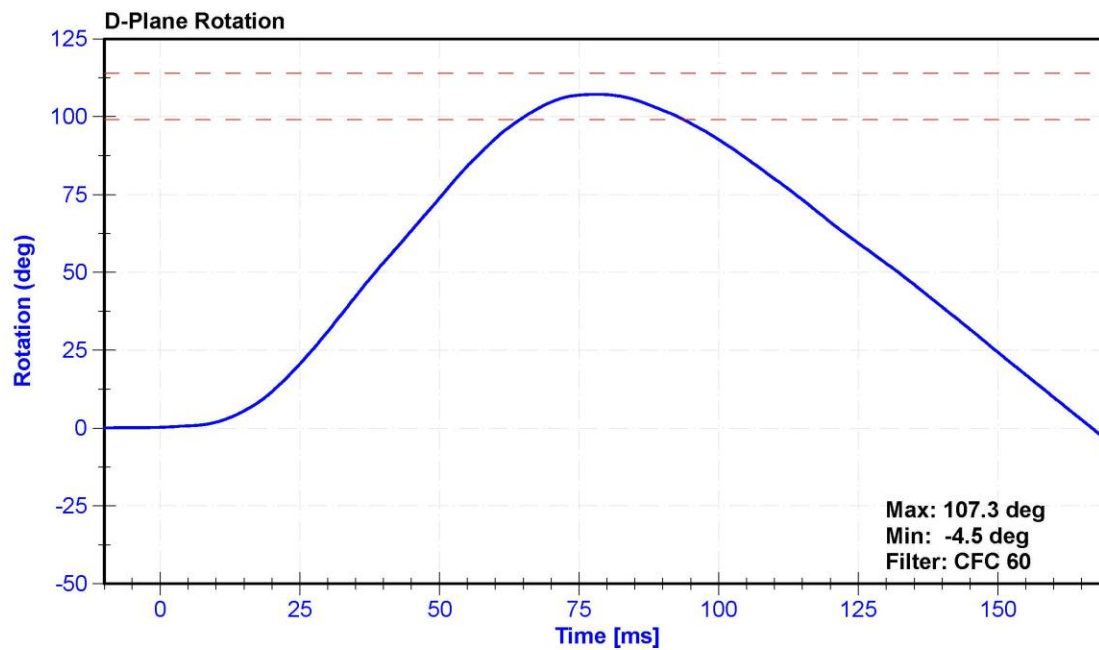

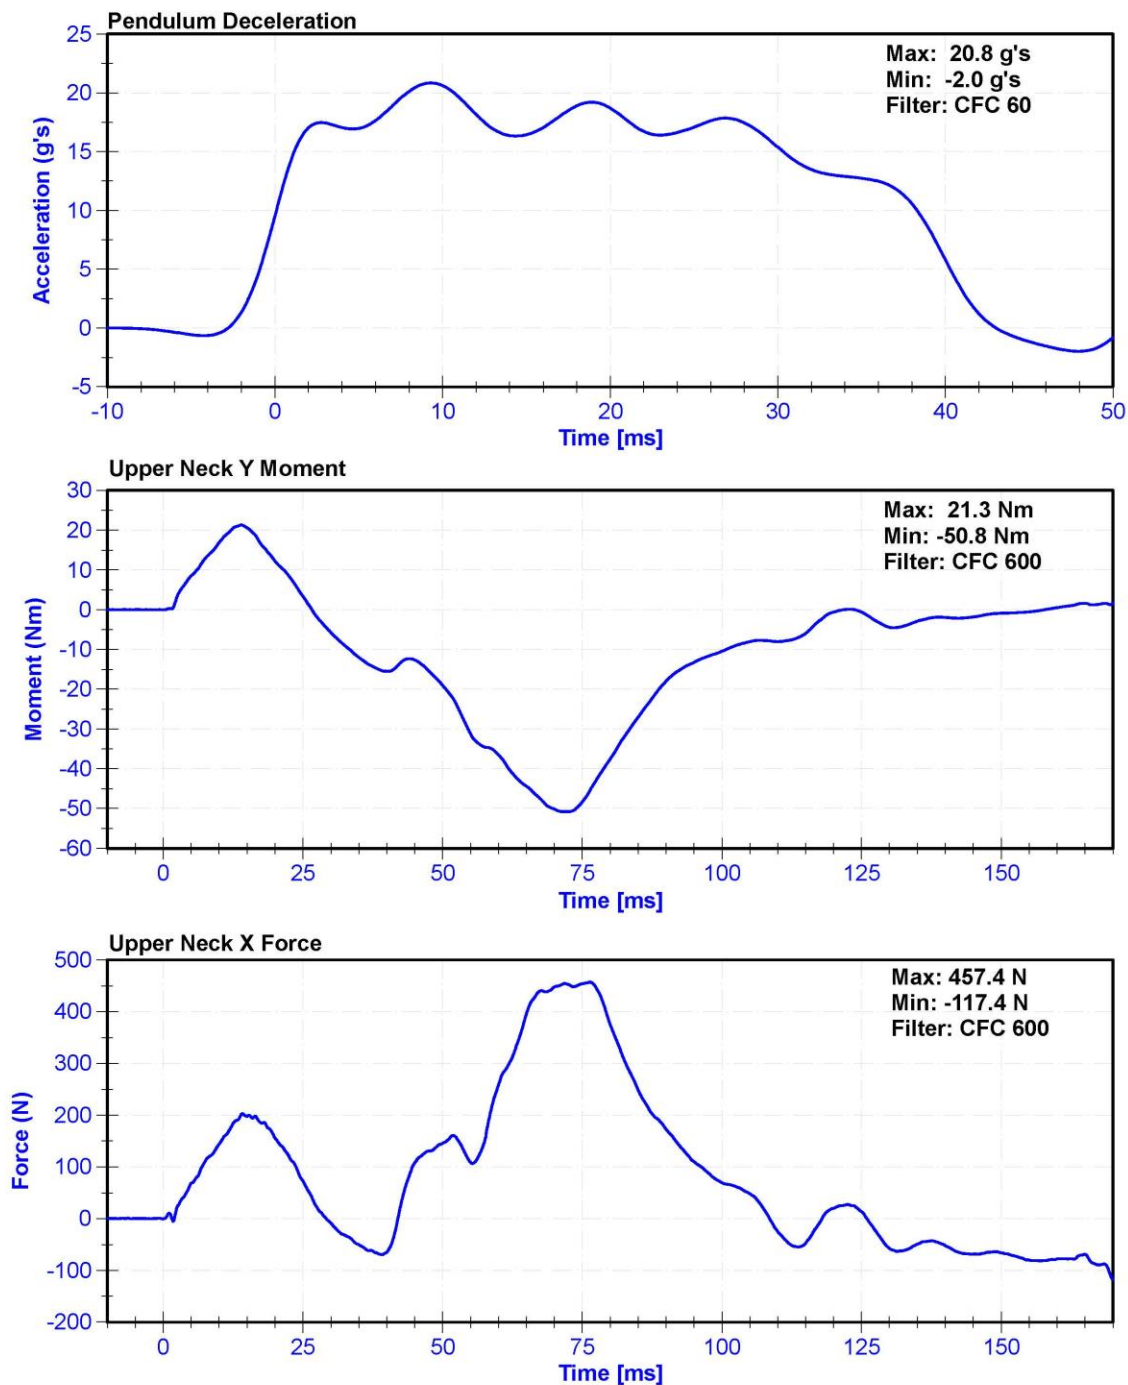


ATD Manufacturer	FTSS	Test Technician	K. Dutton
ATD Serial Number	288	Laboratory Supervisor	K. Brogan



Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	58	Pass
Velocity	6.59	6.83	m/s	6.655	Pass
Chest Deflection	-58	-50	mm	-52.3	Pass
Maximum Resistive Force (50 to 58mm)	3900	4400	N	4190.2	Pass
Maximum Resistive Force (18 to 50mm)	0	4600	N	4179.3	Pass
Hysteresis	69	85	%	73.5	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P71278	12/14/2018	12/14/2019
Chest Potentiometer	SERVO 14CBI-3615	DS-140GFE	6/21/2019	6/20/2020

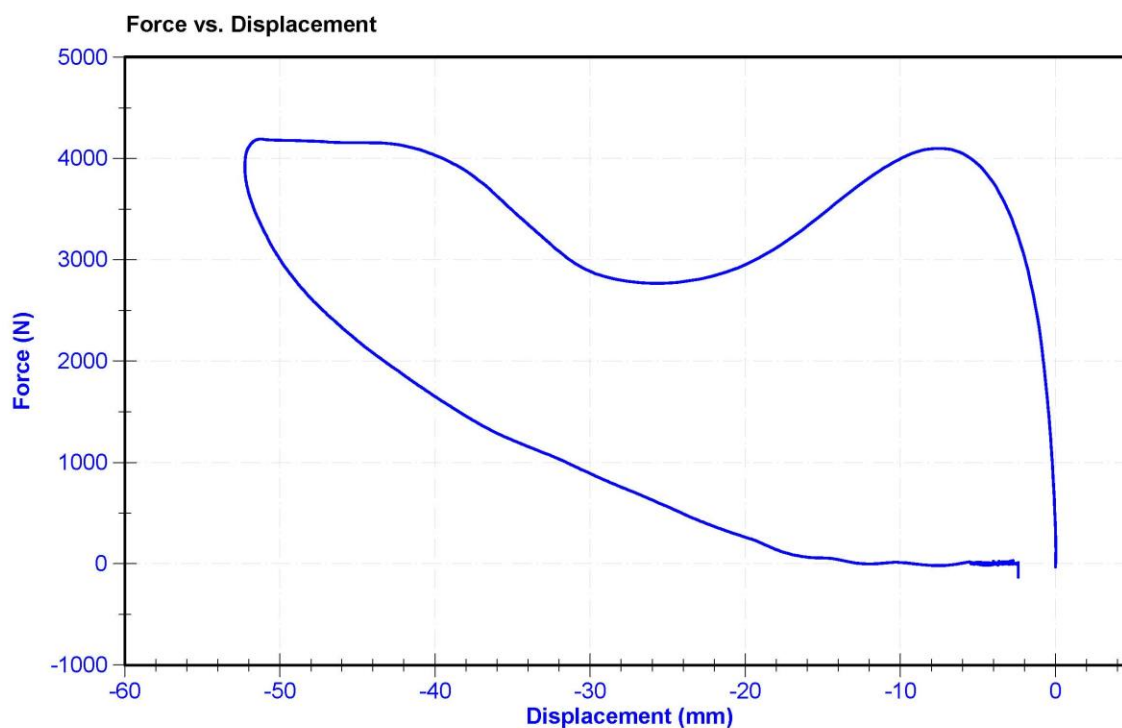

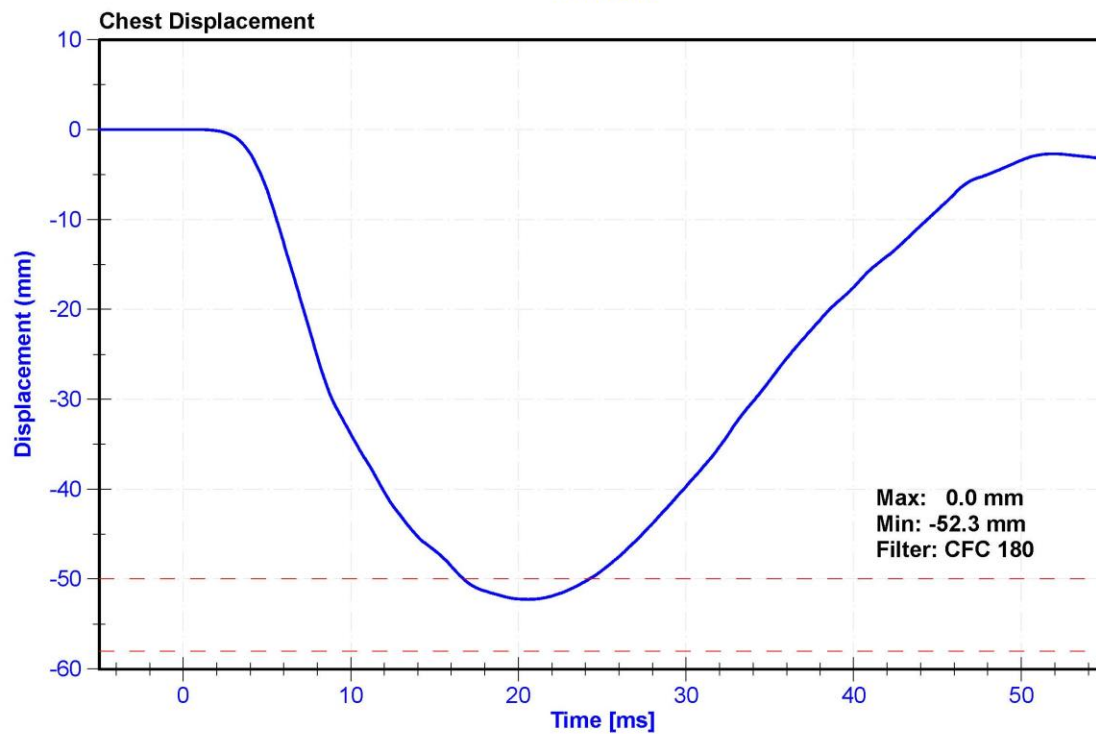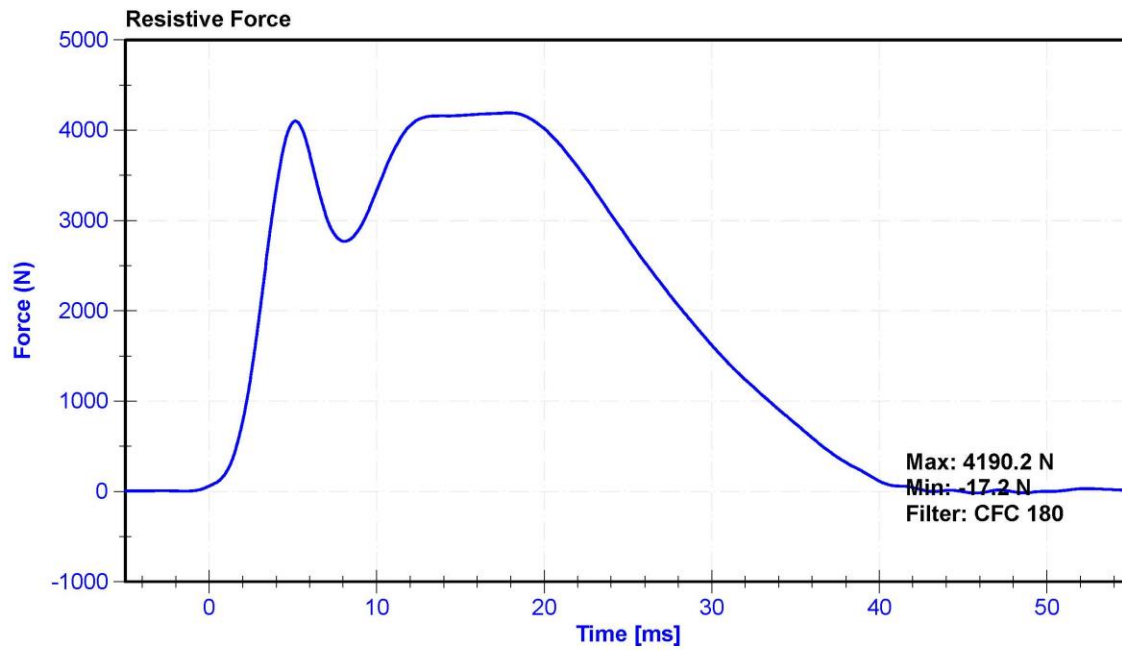

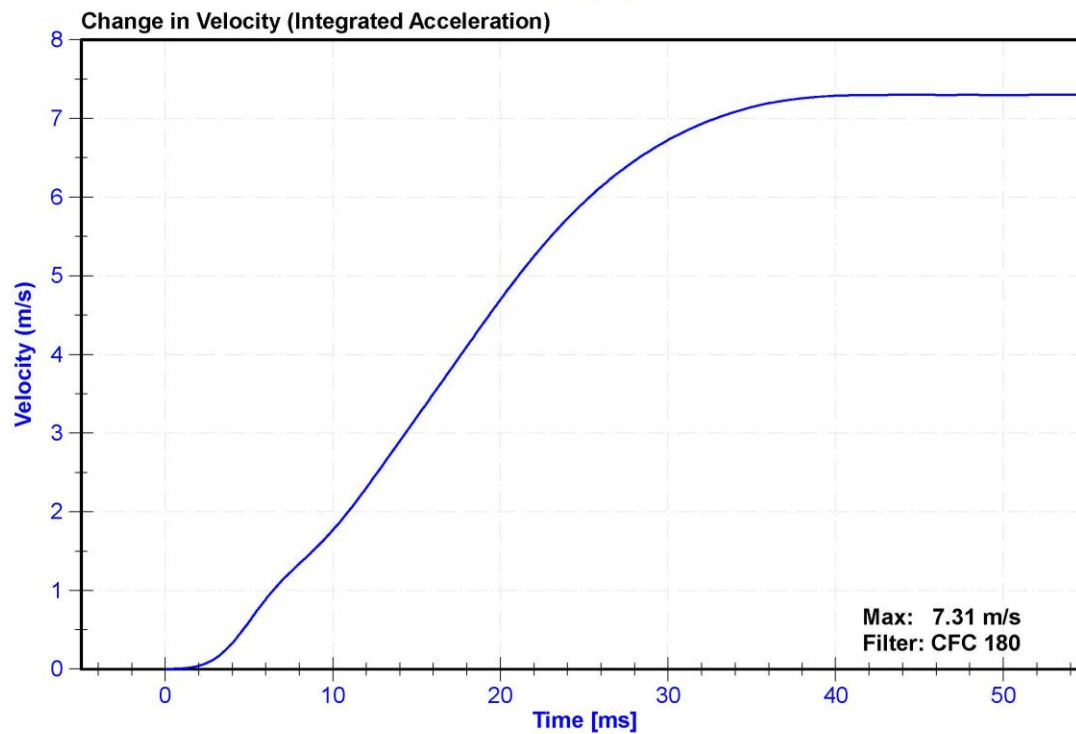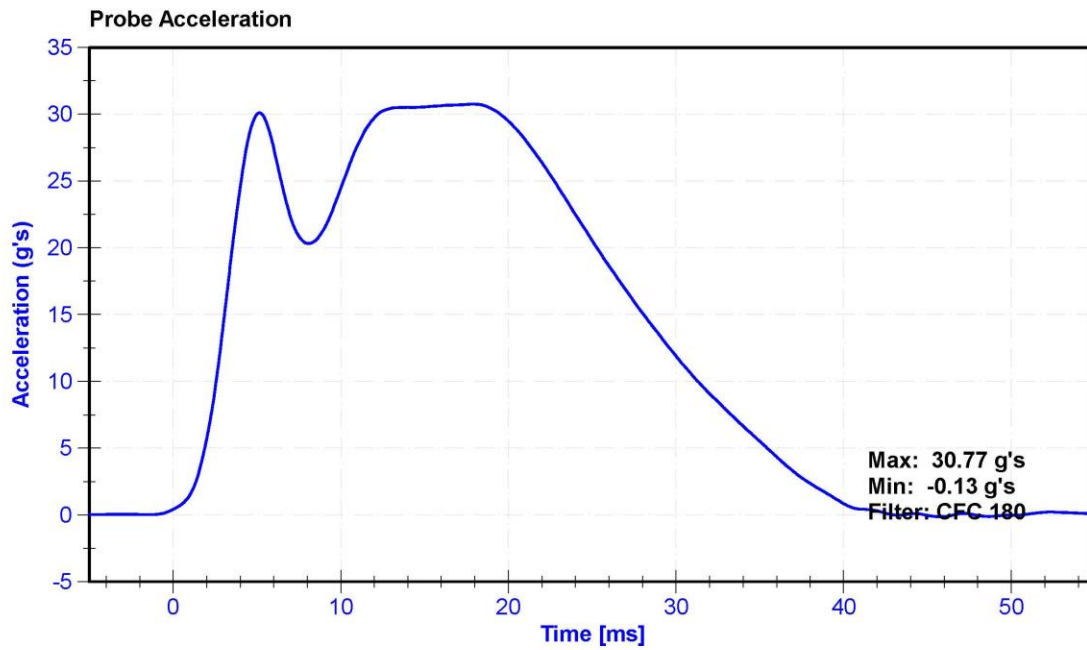


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	288	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.6	25.6	°C	21.5	Pass
Humidity	10	70	%	56	Pass
Initial Angle	0	20	deg	15.8	Pass
Force at 45 Degrees	320	390	N	325.2	Pass
Return Angle Relative to Initial	0	8	deg	2.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	Rieker N4C-1	DS-13051548	2018-10-25	2019-10-25
Load Cell	Interface SML-200	LC-493319	2018-10-25	2019-10-25

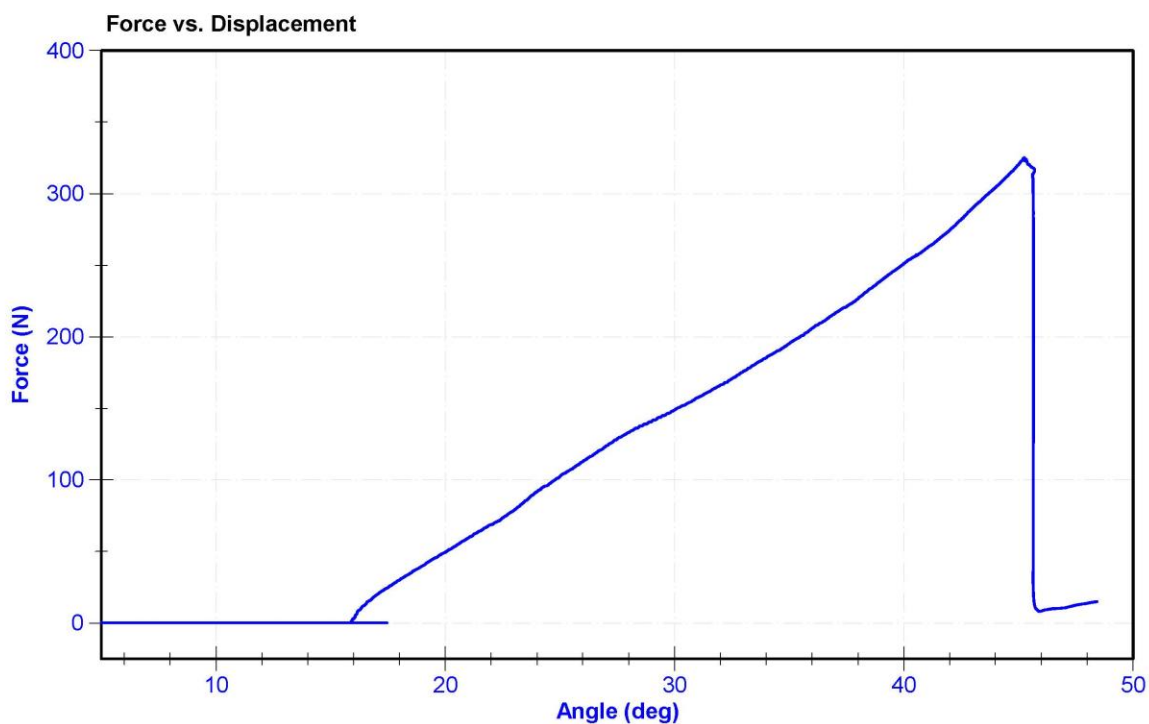


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	288	Laboratory Supervisor	K.Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	54.0	Pass
Velocity	2.07	2.13	m/s	2.101	Pass
Resistive Force	3450	4060	N	3789.2	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	2/21/2019	8/22/2019

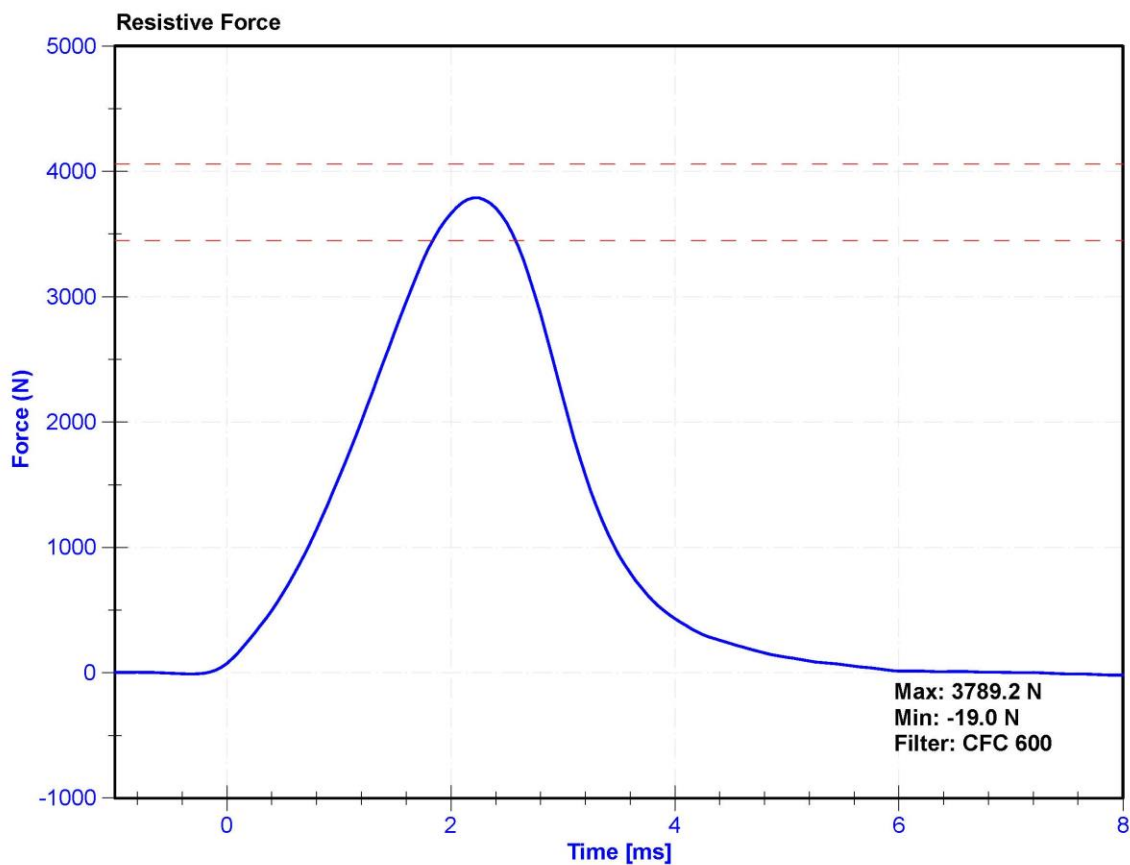

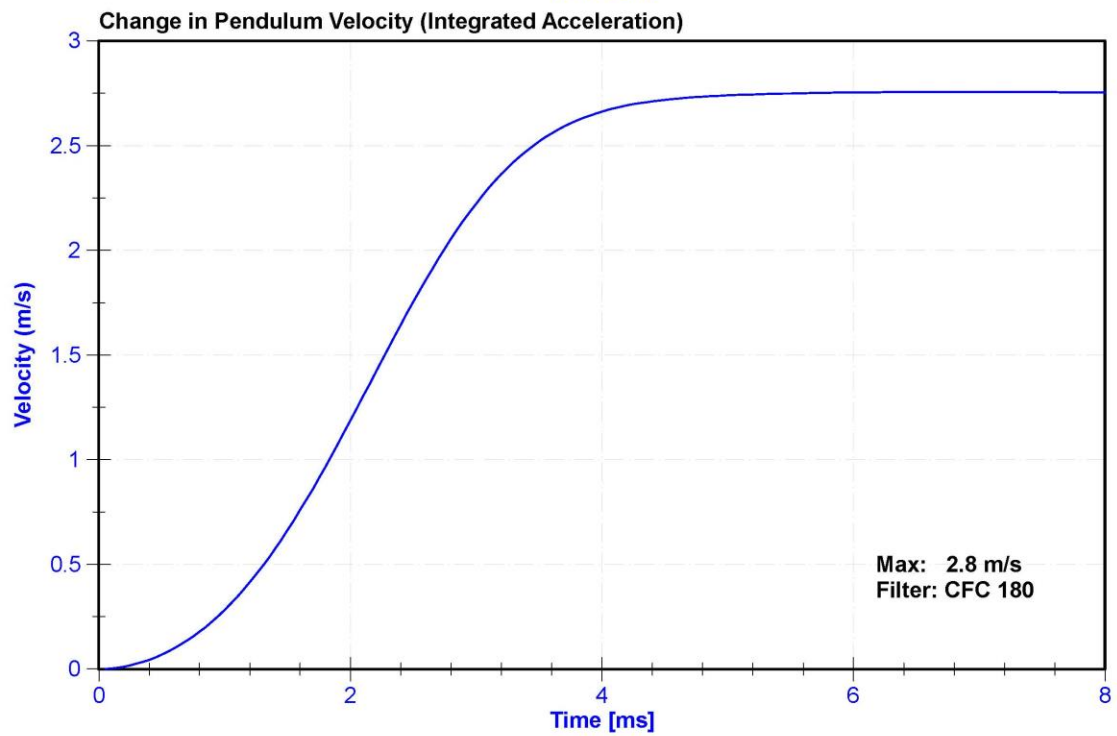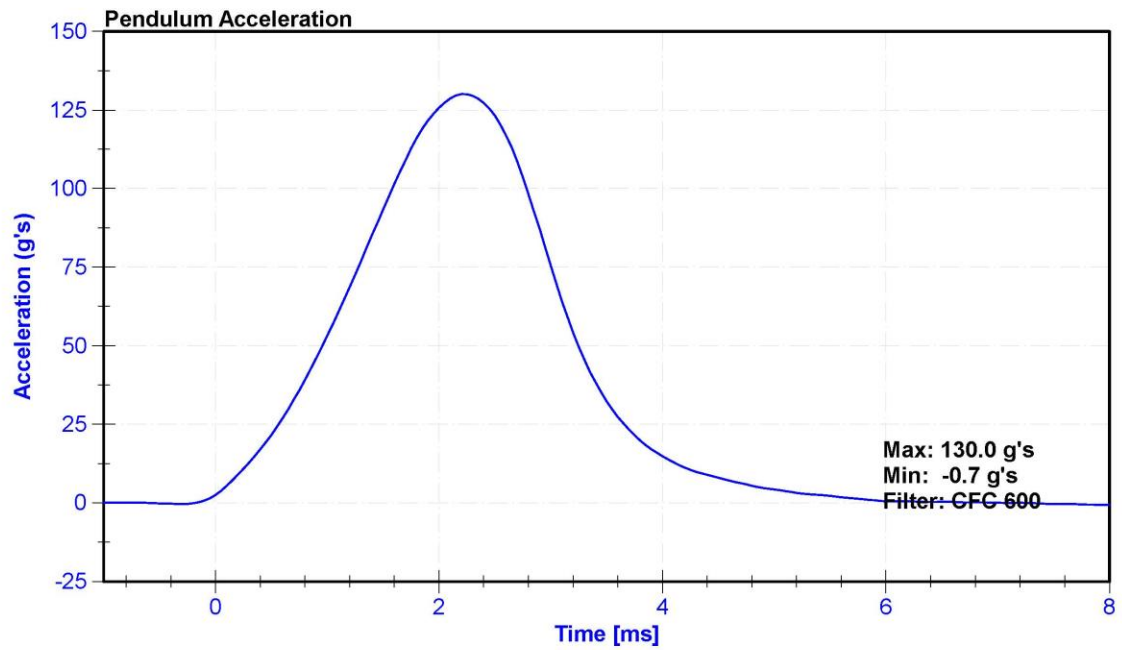


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	288	Laboratory Supervisor	K.Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.1	Pass
Humidity	10	70	%	56.0	Pass
Velocity	2.07	2.13	m/s	2.099	Pass
Resistive Force	3450	4060	N	3650.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	2/21/2019	8/22/2019

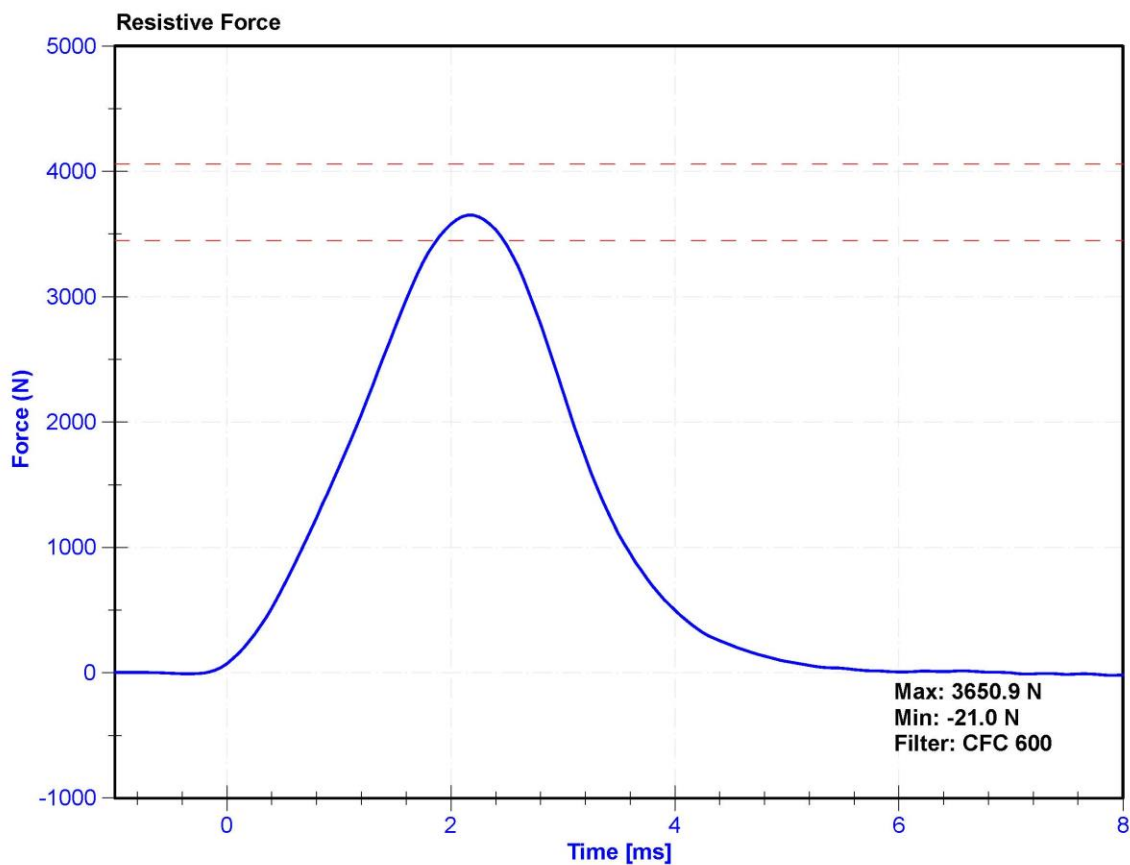

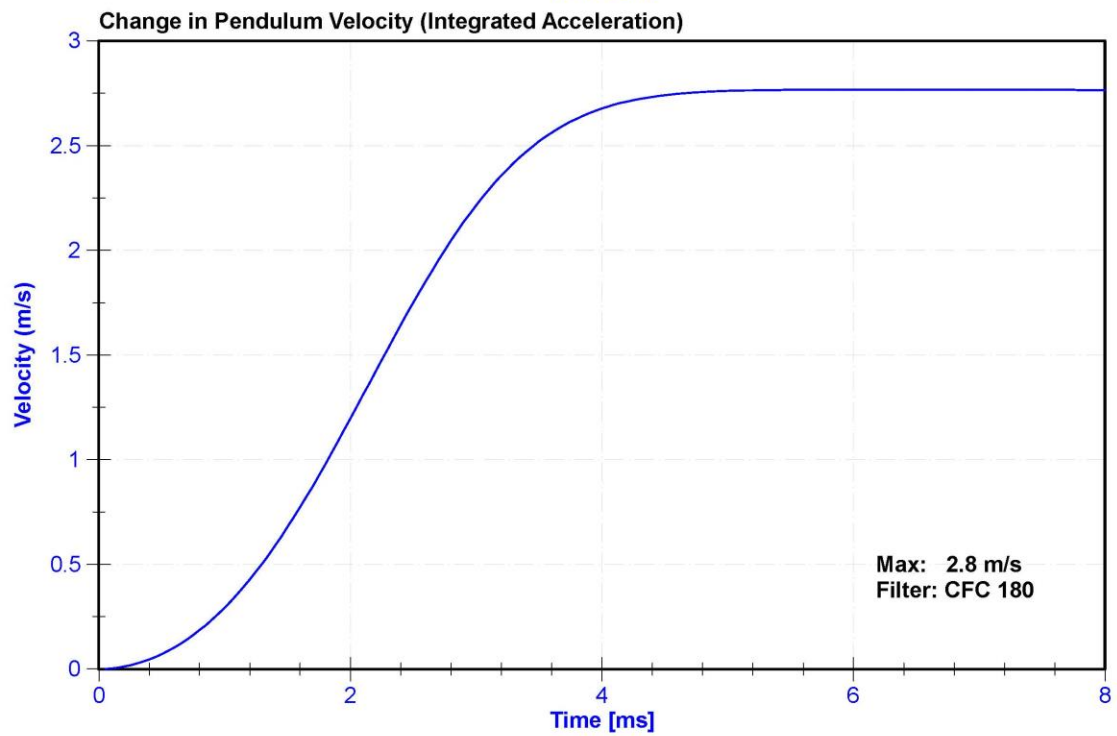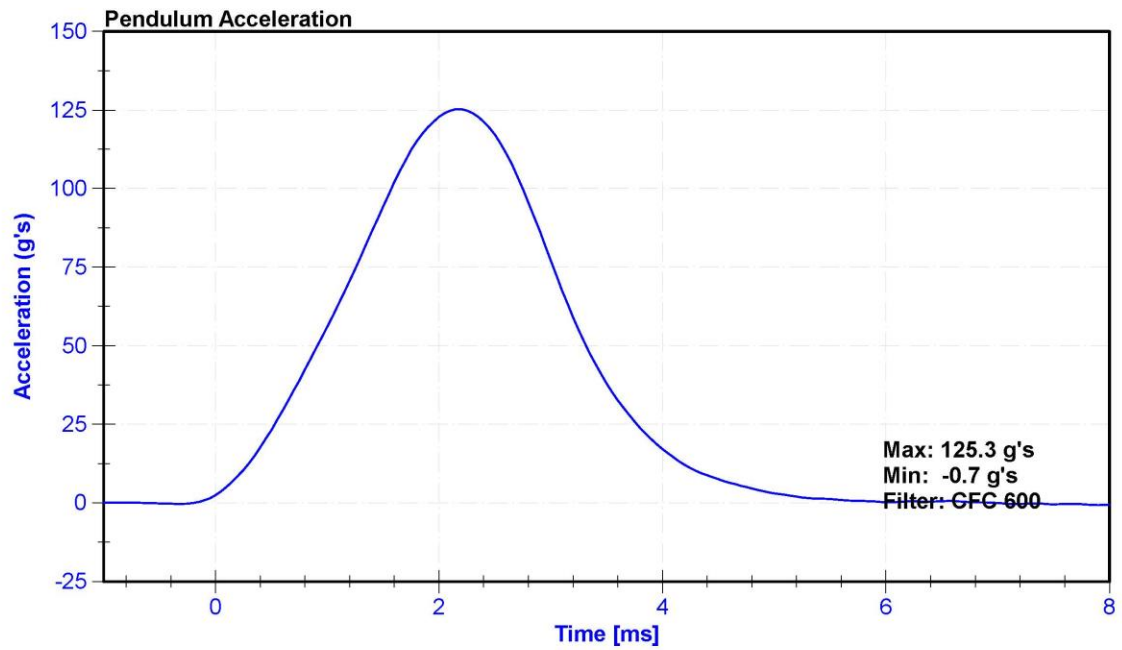

CALIBRATION TEST RESULTS

POST-TEST

HYBRID III 50TH PERCENTILE MALE - DRIVER ATD

SERIAL NO: 142




External Measurements - Hybrid 3 - 50th Male

Technician: K. Dutton

Date: 07/19/2019

Dummy Serial Number: 142

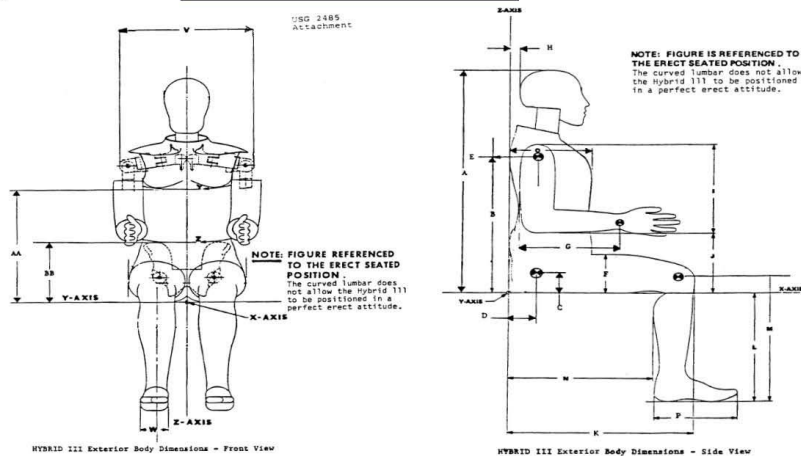

Symbol	Description	Specification (in)		Result (in)	Pass/Fail
A	Sitting Height	34.6	35.0	34.8	Pass
B	Shoulder Pivot Height	19.9	20.5	20.2	Pass
C	H-Point Height	3.3	3.5	3.4	Pass
D	H-Point from Backline	5.3	5.5	5.4	Pass
E	Shoulder Pivot from Backline	3.3	3.7	3.5	Pass
F	Thigh Clearance	5.5	6.1	5.8	Pass
G	Back of Elbow to Wrist Pivot	11.4	12.0	11.6	Pass
H	Head Back to Backline	1.6	1.8	1.7	Pass
I	Shoulder to Elbow Length	13.0	13.6	13.5	Pass
J	Elbow Rest Height	7.5	8.3	8.1	Pass
K	Buttock to Knee Length	22.8	23.8	23.4	Pass
L	Popliteal Height	16.9	17.9	17.4	Pass
M	Knee Pivot Height	19.1	19.7	19.4	Pass
N	Buttock Popliteal Length	17.8	18.8	18.4	Pass
O	Chest Depth without Jacket	8.4	9.0	8.7	Pass
P	Foot Length (right)	9.9	10.5	10.3	Pass
V	Shoulder Breadth	16.3	17.2	16.8	Pass
W	Foot Breadth	3.6	4.2	3.9	Pass
Y	Chest Circumference with Jacket	38.2	39.4	38.9	Pass
Z	Waist Circumference	32.9	34.1	33.7	Pass
AA	Reference Location (Chest Circumference)	16.9	17.1	17.0	Pass
BB	Reference Location (Waist Circumference)	8.9	9.1	9.0	Pass


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.4	Pass
Humidity	10	70	%	56.8	Pass
Resultant Acceleration	225	275	g's	263.9	Pass
Oscillation	0	10	%	4.2	Pass
Lateral Acceleration	-15	15	g's	-2.5	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	P58998	4/19/2019	4/18/2020
Y Accelerometer	ENDEVCO 7264CT	P51722	4/19/2019	4/18/2020
Z Accelerometer	ENDEVCO 7264CT	P58997	4/19/2019	4/18/2020

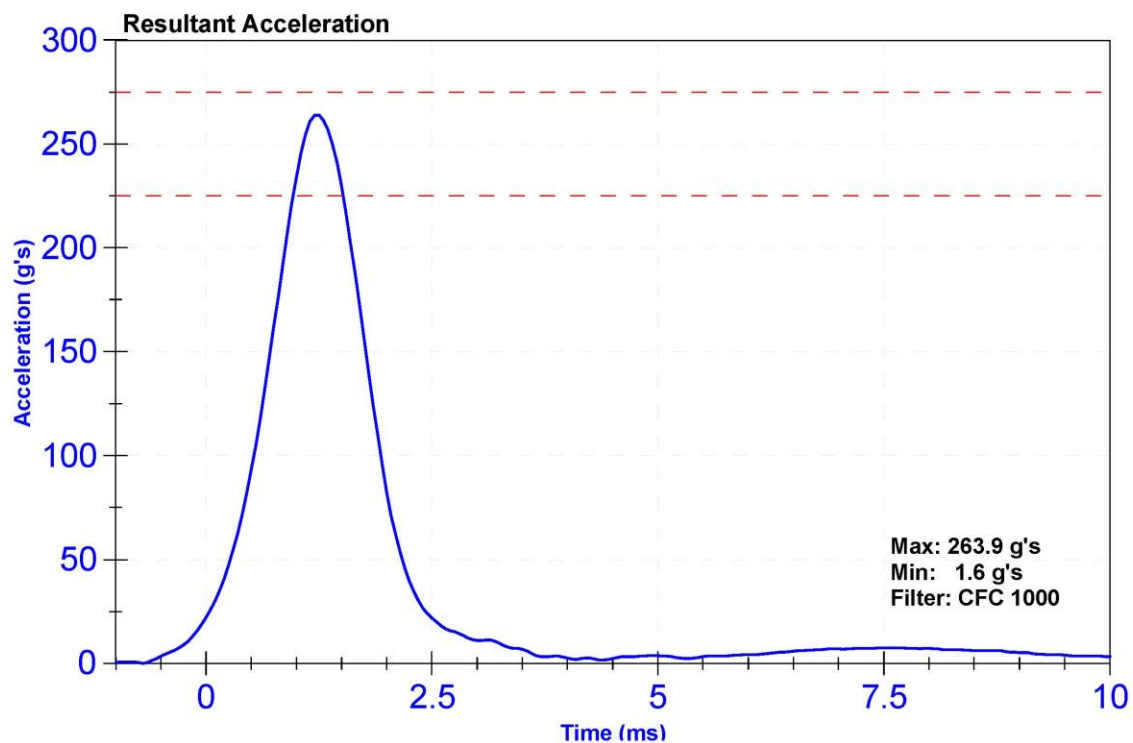

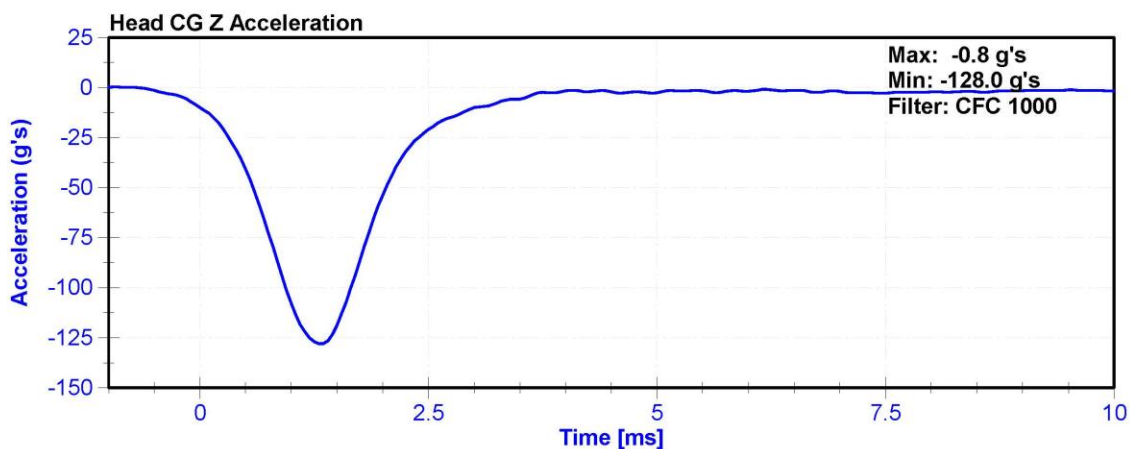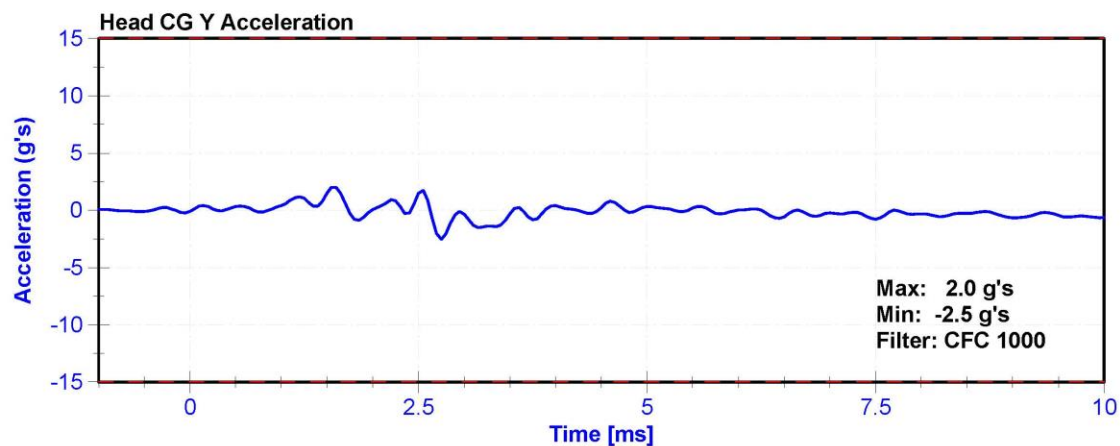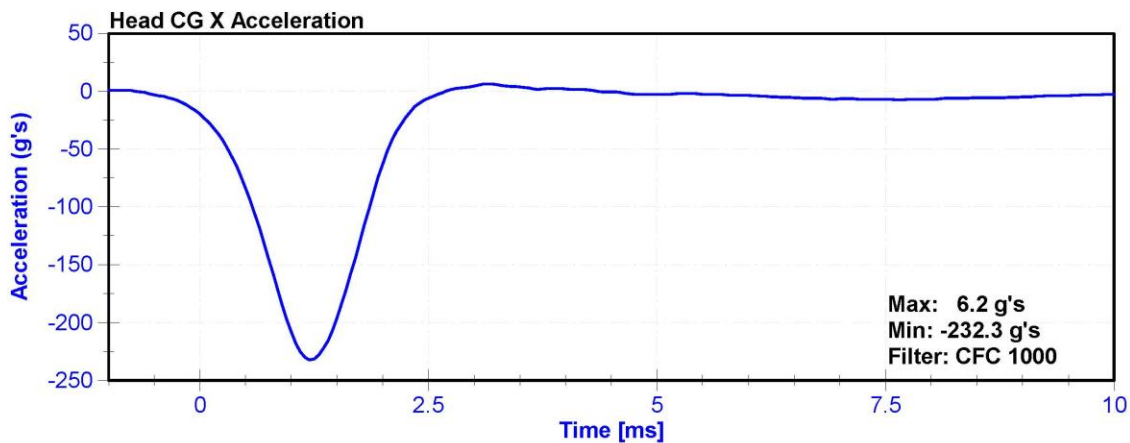



ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K.Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.8	Pass
Humidity	10	70	%	49.8	Pass
Velocity	6.89	7.13	m/s	6.903	Pass
Pendulum Deceleration at 10ms	22.5	27.5	g's	23.99	Pass
Pendulum Deceleration at 20ms	17.6	22.6	g's	22.04	Pass
Pendulum Deceleration at 30ms	12.5	18.5	g's	16.87	Pass
Max. Pendulum Deceleration After 30ms	0	29	g's	24.3	Pass
Pendulum Deceleration Time to 5 g's	34	42	ms	40.4	Pass
Maximum D Plane Rotation	64	78	deg	66.5	Pass
Time to Maximum Rotation	57	64	ms	61.7	Pass
Rotation Decay to Zero	113	127	ms	118.7	Pass
Moment About Occipital Condyle	88.1	108.4	Nm	91.41	Pass
Time to Maximum Moment	47	58	ms	53.5	Pass
Moment Decay to Zero	97	107	ms	102.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	11/15/2018	11/15/2019
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	11/15/2018	11/15/2019
Upper Neck Load Cell	FTSS IF-205	LC-161Fx	9/28/2018	9/28/2019

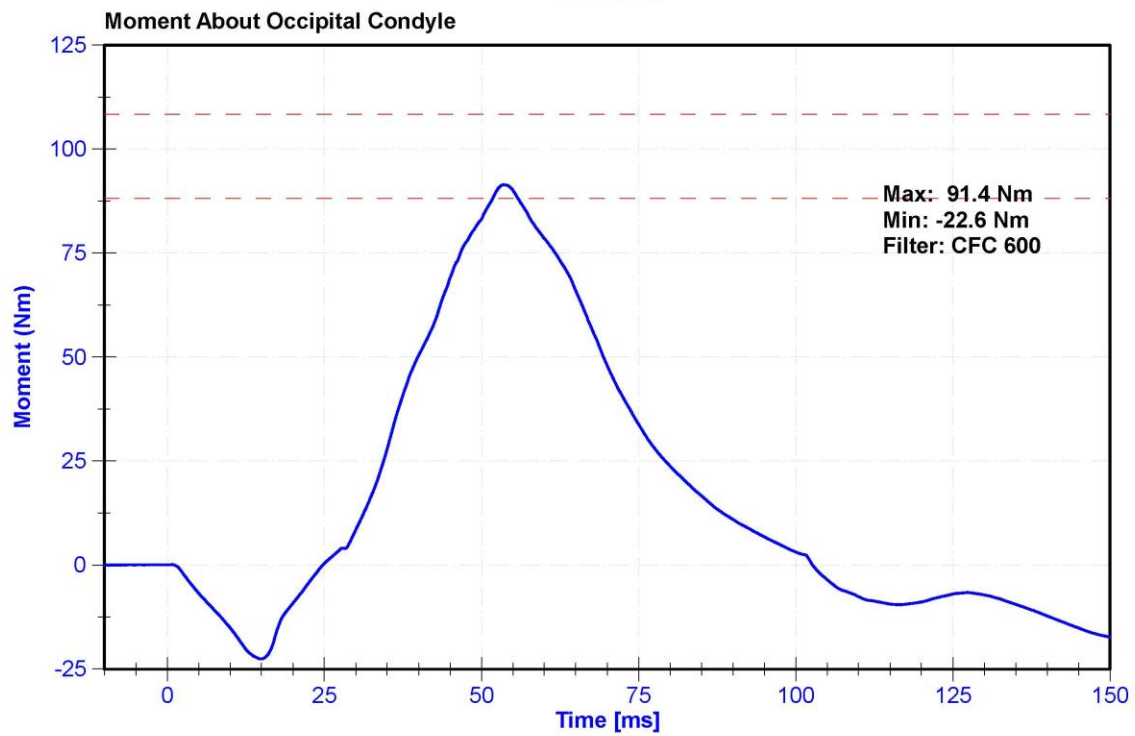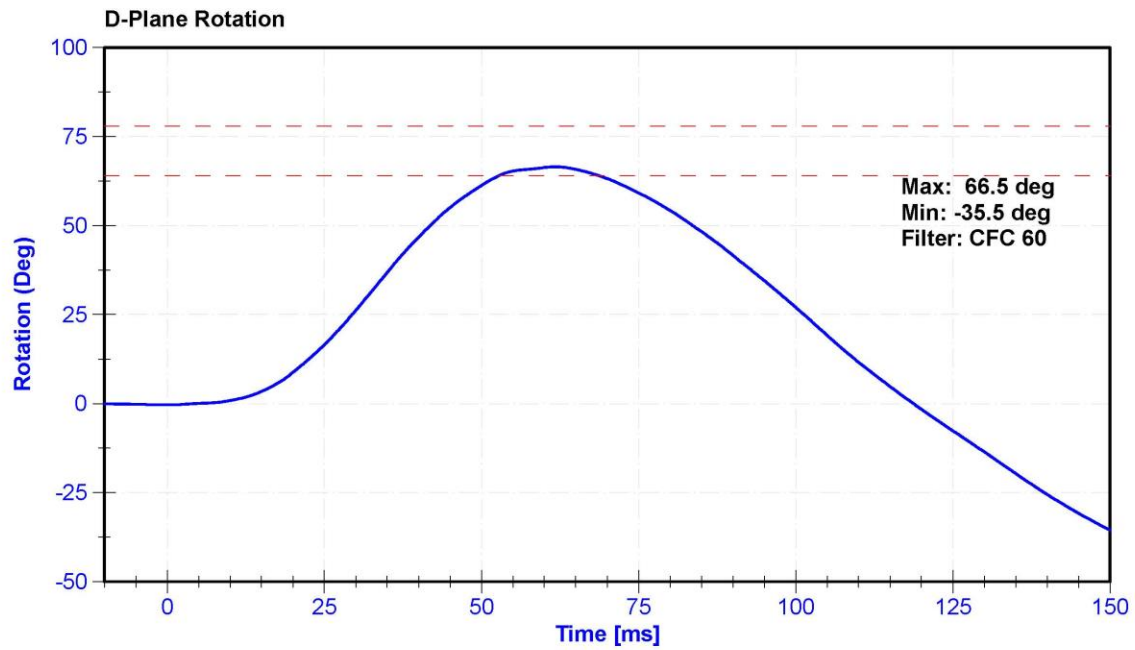

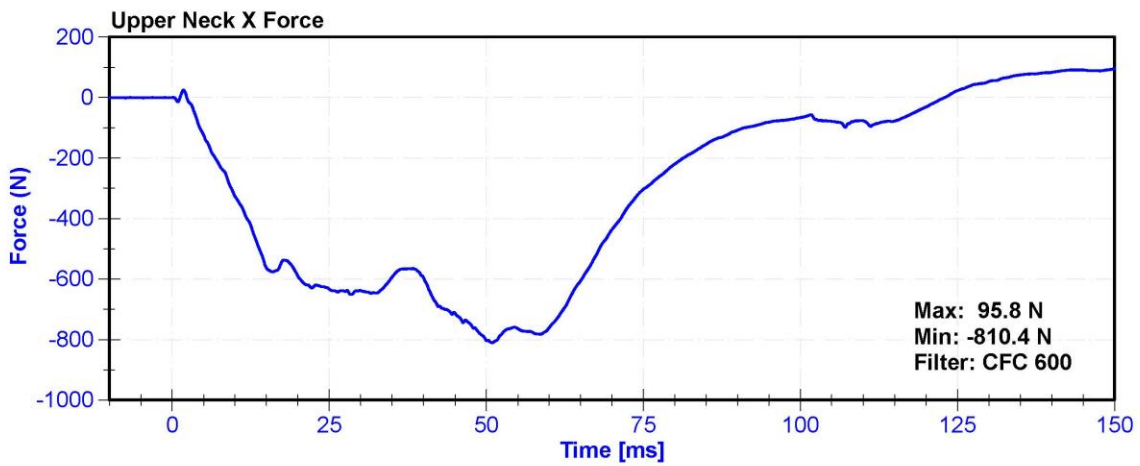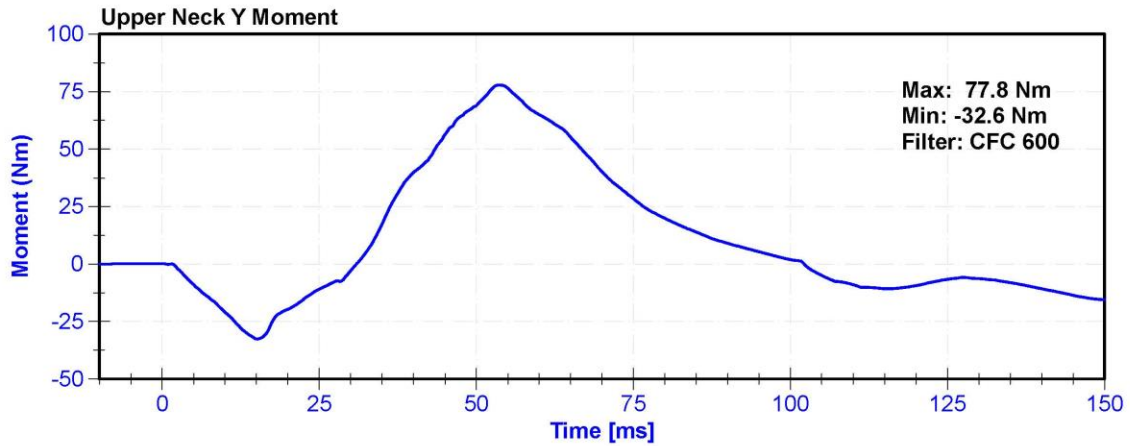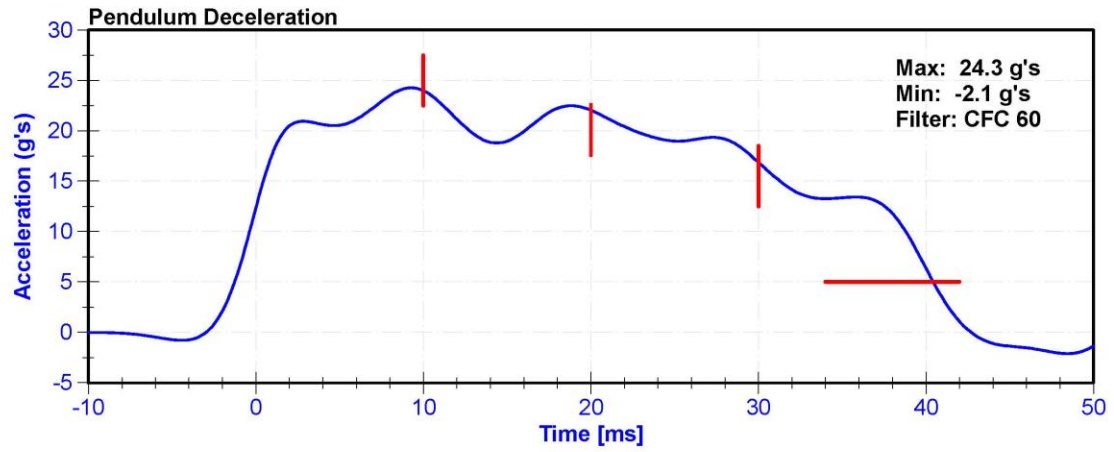



ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K.Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22	Pass
Humidity	10	70	%	50.8	Pass
Velocity	5.94	6.19	m/s	5.964	Pass
Pendulum Deceleration at 10ms	17.2	21.2	g's	21.06	Pass
Pendulum Deceleration at 20ms	14	19	g's	18.9	Pass
Pendulum Deceleration at 30ms	11	16	g's	14.6	Pass
Max. Pendulum Deceleration After 30ms	0	22	g's	21.2	Pass
Pendulum Deceleration Time to 5 g's	38	46	ms	40.9	Pass
Maximum D Plane Rotation	81	106	deg	88.4	Pass
Time to Maximum Rotation	72	82	ms	79.2	Pass
Rotation Decay to Zero	147	174	ms	157.1	Pass
Minimum Moment About OC	-80	-52.9	Nm	-66.71	Pass
Time to Minimum Moment	65	79	ms	70.4	Pass
Moment Decay to Zero	120	148	ms	138.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	11/15/2018	11/15/2019
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	11/15/2018	11/15/2019
Upper Neck Load Cell	FTSS IF-205	LC-161Fx	9/28/2018	9/28/2019

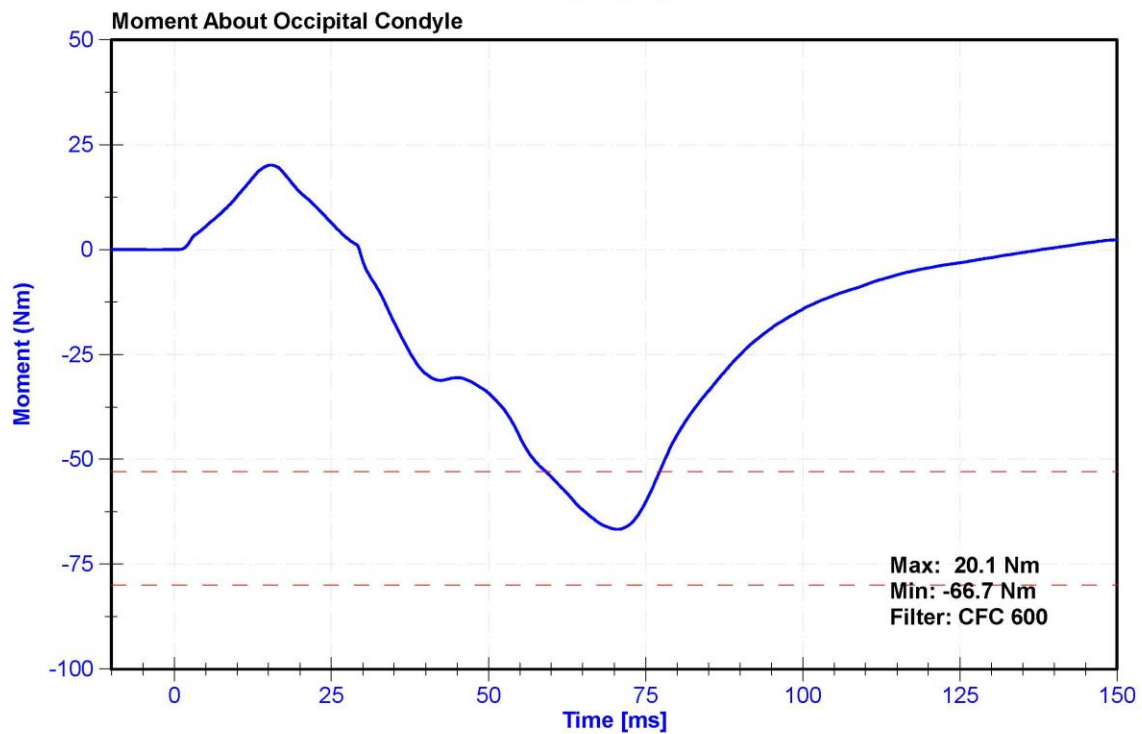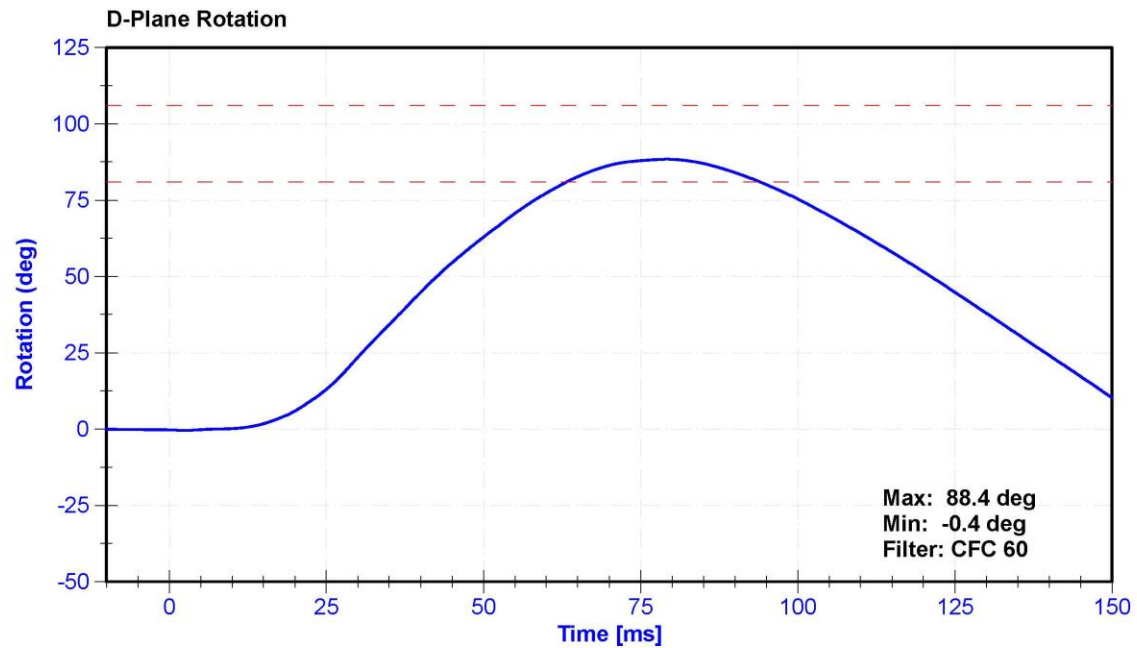

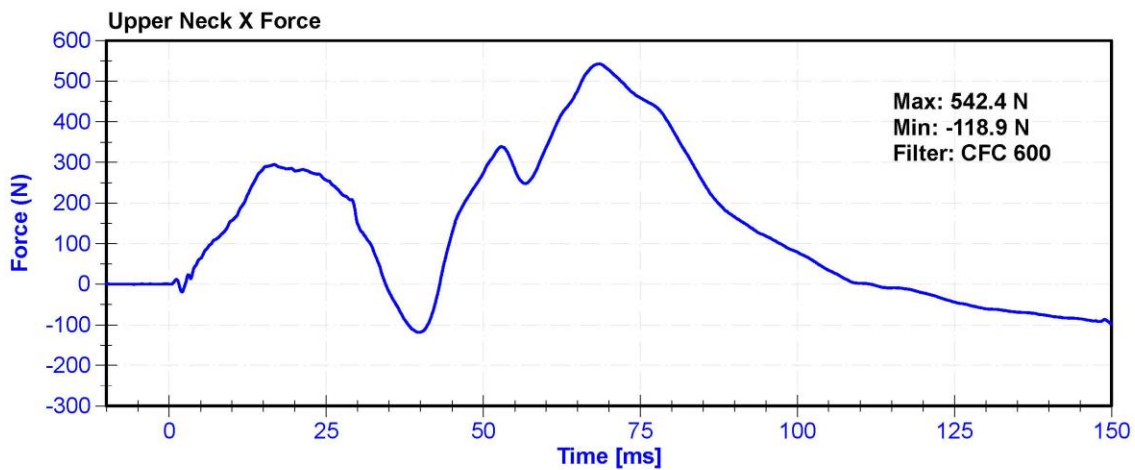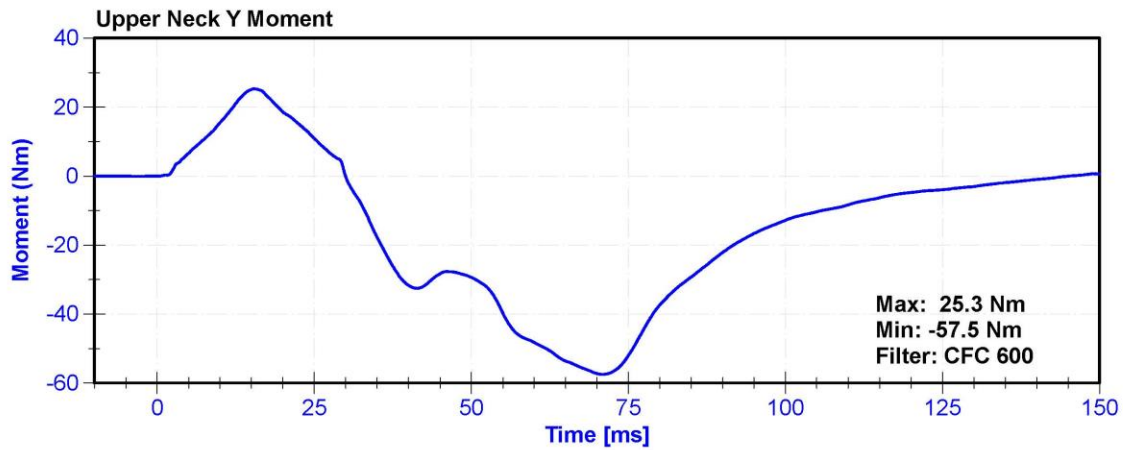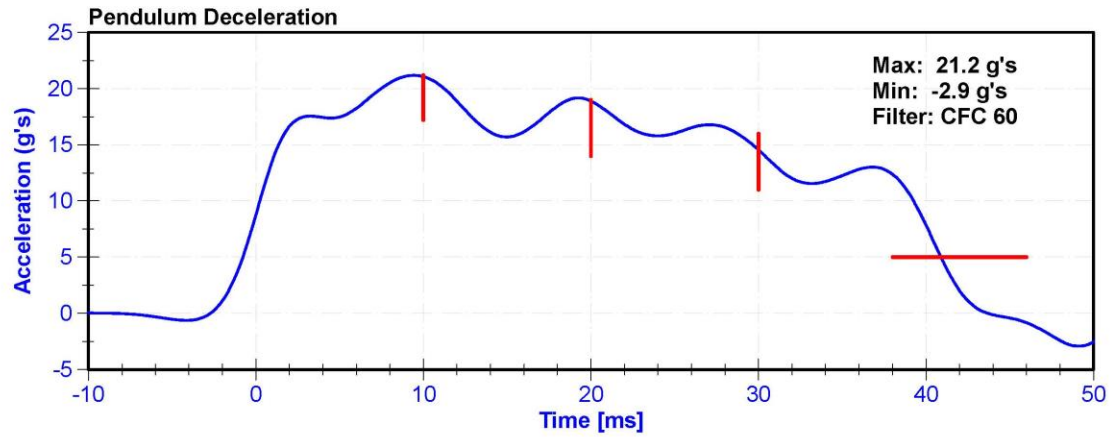


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K.Brogan



Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22	Pass
Humidity	10	70	%	59	Pass
Velocity	6.59	6.83	m/s	6.612	Pass
Chest Displacement	-72.6	-63.5	mm	-67.93	Pass
Resistive Force	5160	5894	N	5593.4	Pass
Hysteresis	65	85	%	72.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7264CT	AC-P71278	12/14/2018	12/14/2019
Chest Potentiometer	JDK 6209-2038	DS-142	10/22/2018	10/22/2019

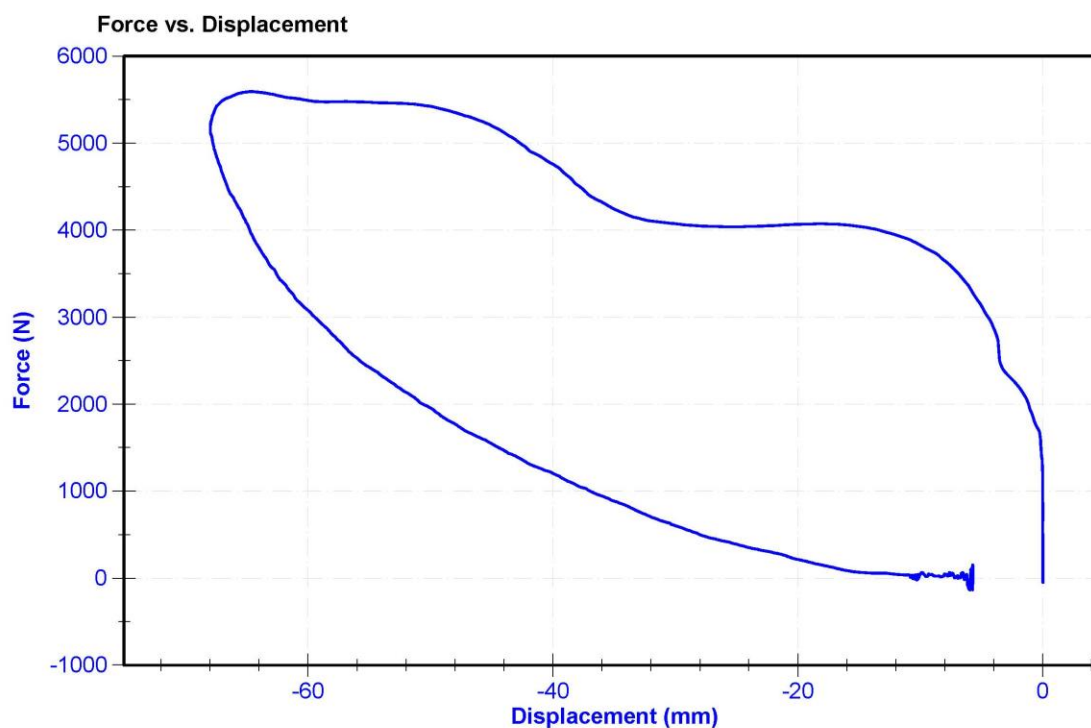

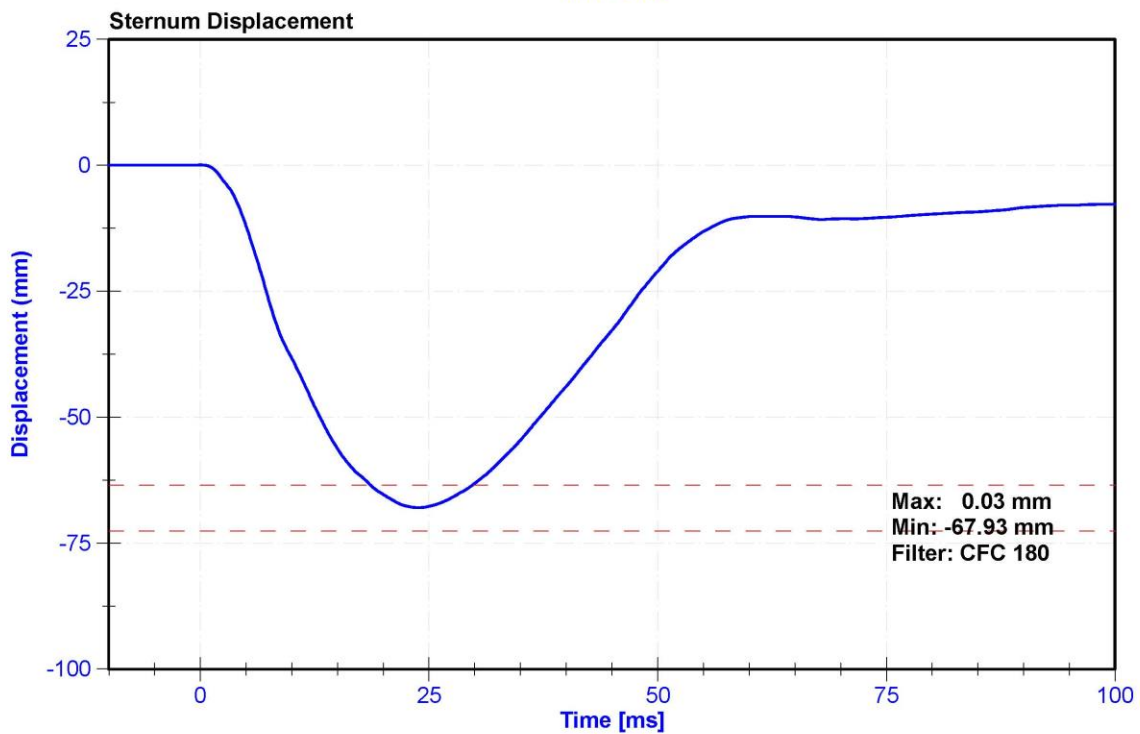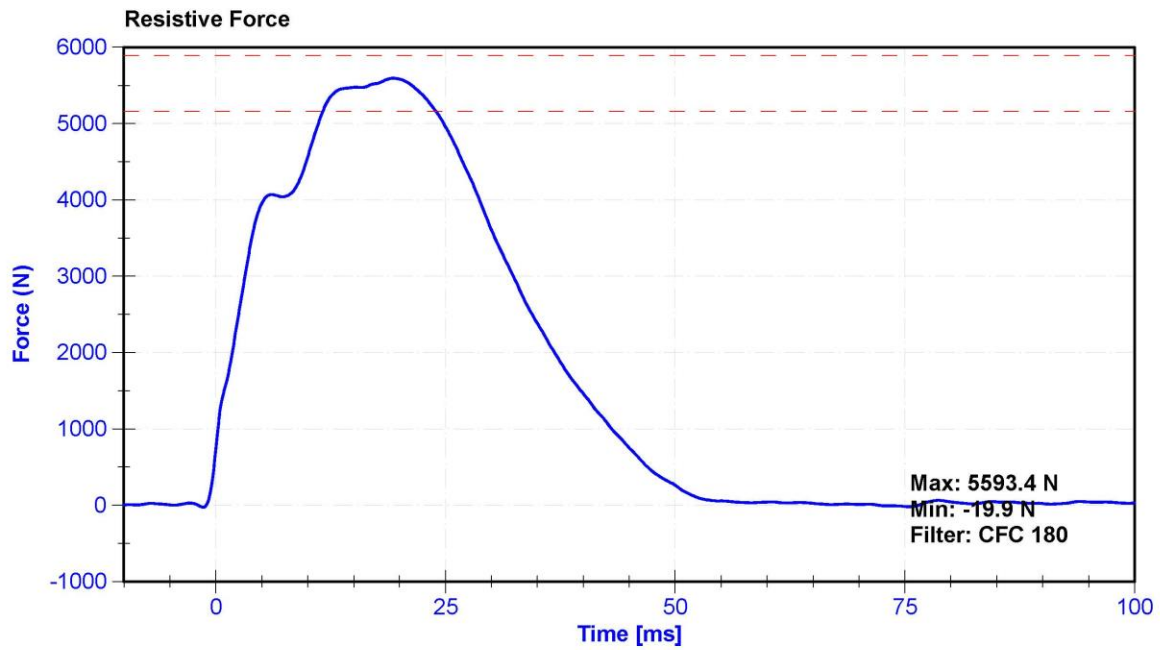

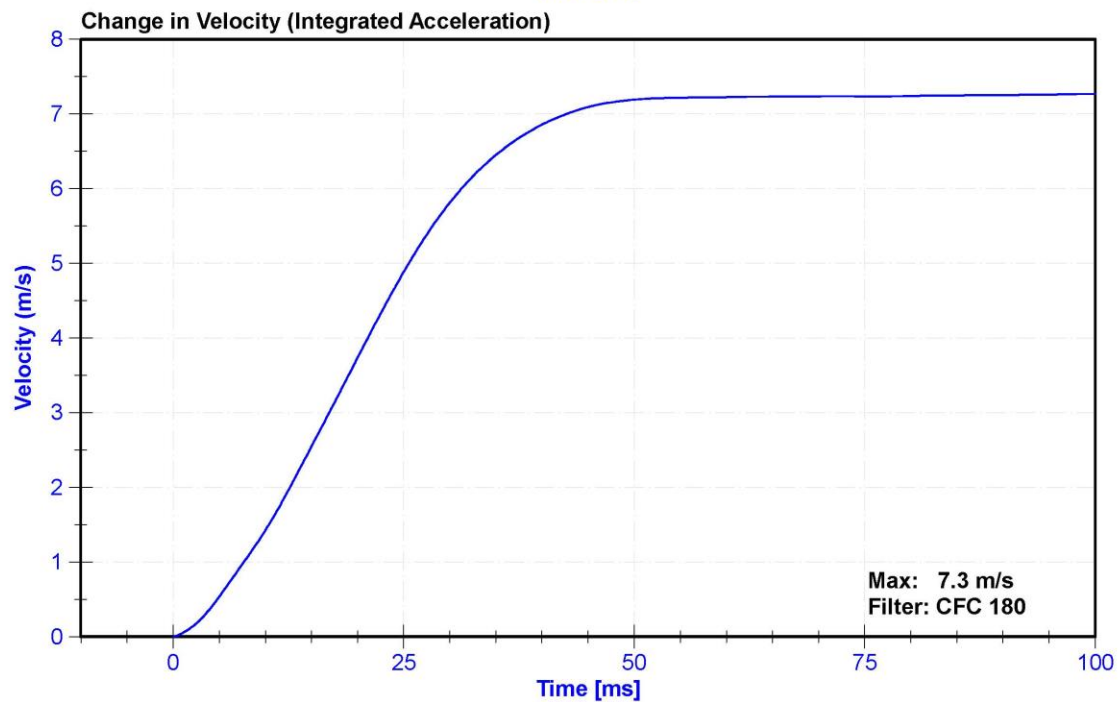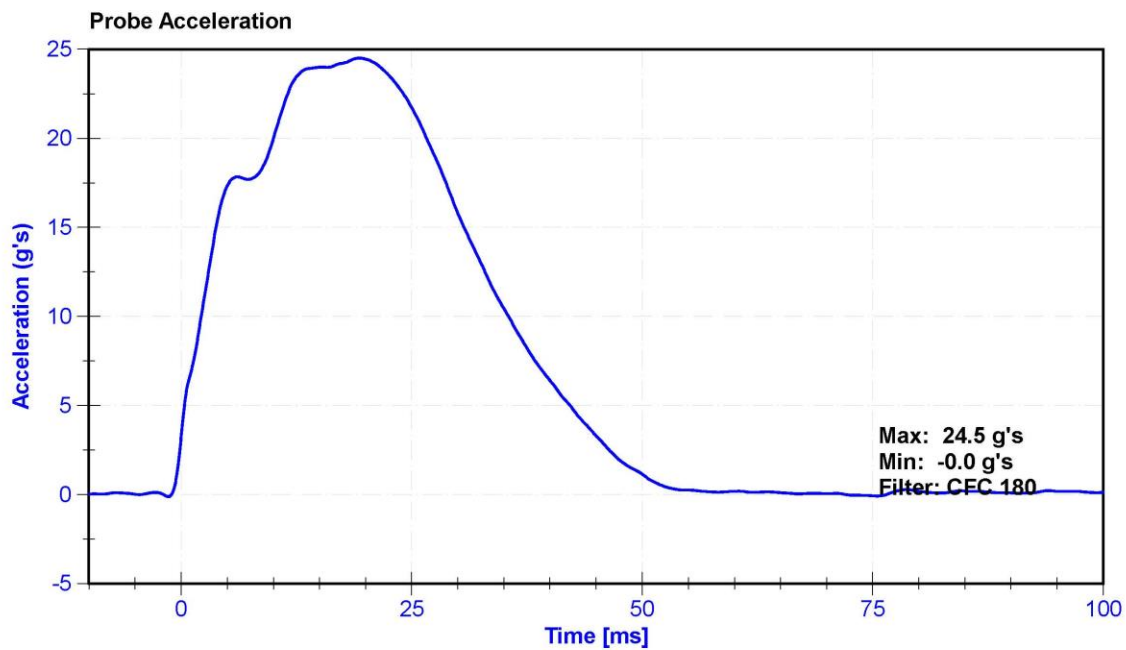


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.9	Pass
Humidity	10	70	%	45.9	Pass
Average Velocity	5	10	deg/s	7.4	Pass
Angle at 203Nm	40	50	deg	43.4	Pass
Moment at 30 degrees	0	94.9	Nm	86.6	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	9/18/2018	9/18/2019
Load Cell	Key Trans 2301-02	LC-115 My	9/6/2018	9/6/2019

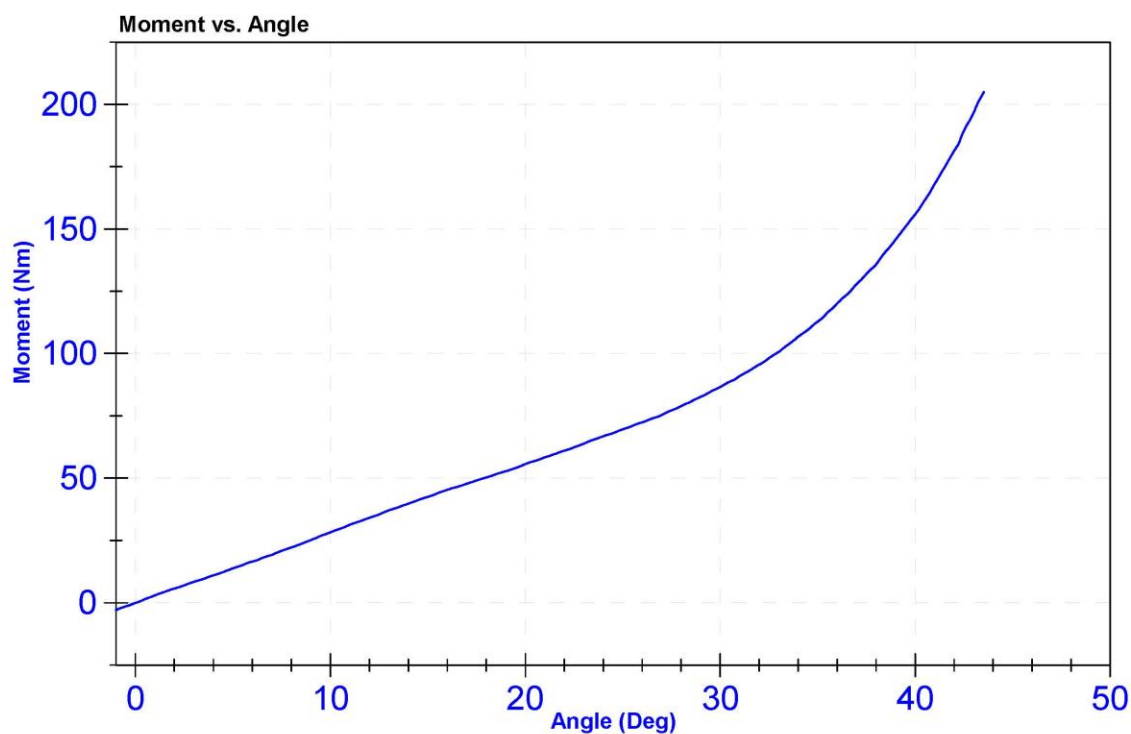


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.0	Pass
Humidity	10	70	%	43.9	Pass
Average Velocity	5	10	deg/s	7.5	Pass
Angle at 203Nm	40	50	deg	46.0	Pass
Moment at 30 degrees	0	94.9	Nm	87.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	9/18/2018	9/18/2019
Load Cell	Key Trans 2301-02	LC-115 My	9/6/2018	9/6/2019

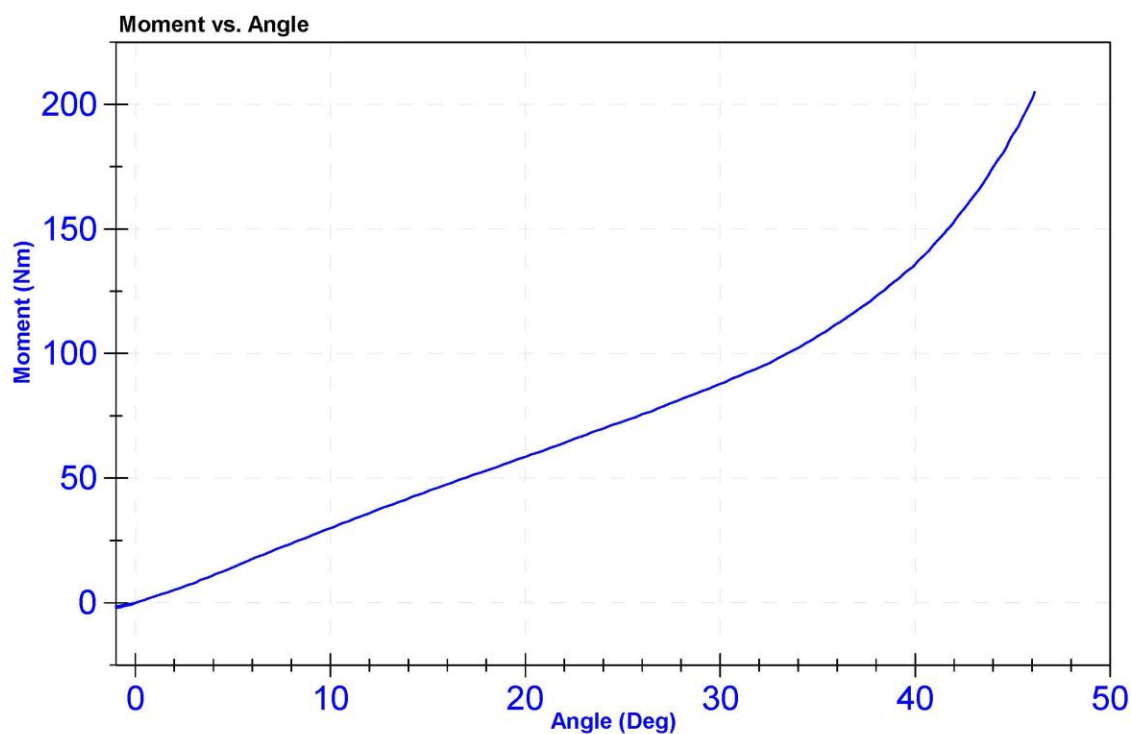


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K.Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.1	Pass
Humidity	10	70	%	61	Pass
Velocity	2.07	2.13	m/s	2.102	Pass
Maximum Resistive Force	4720	5780	N	5495.2	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	2/21/2019	8/22/2019

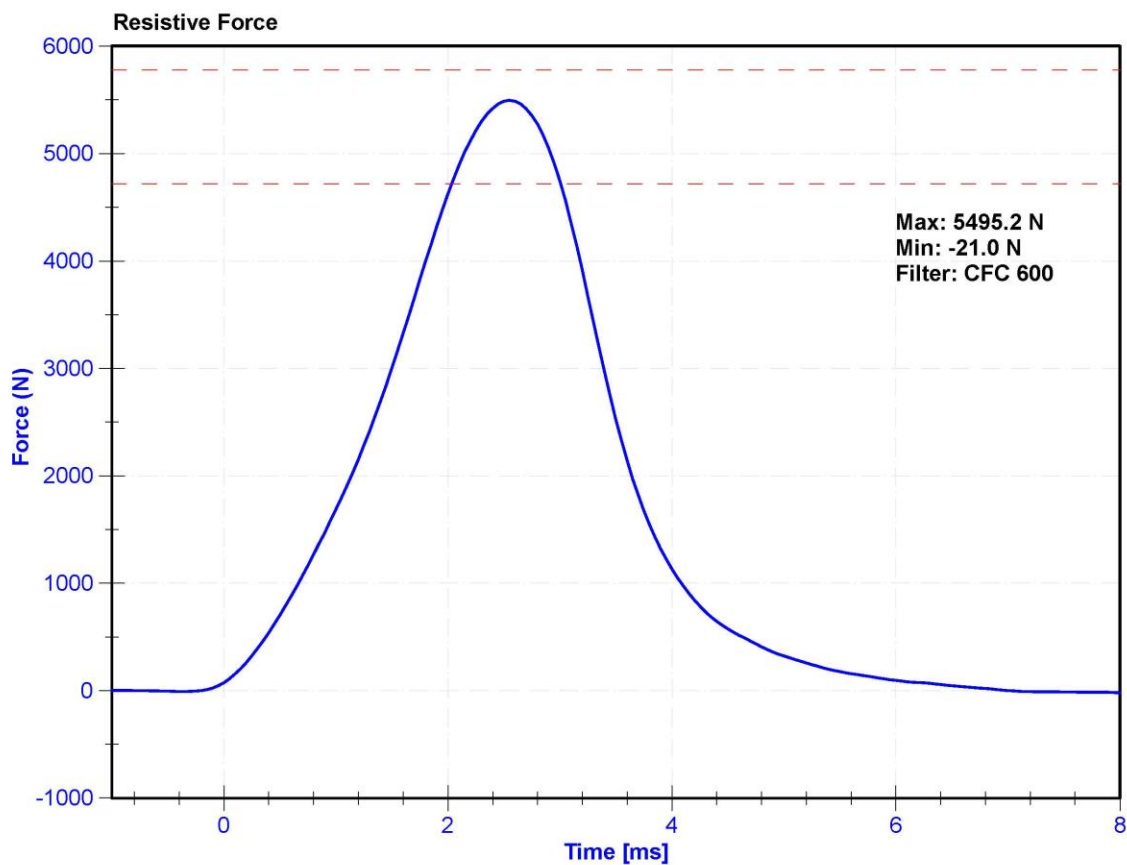

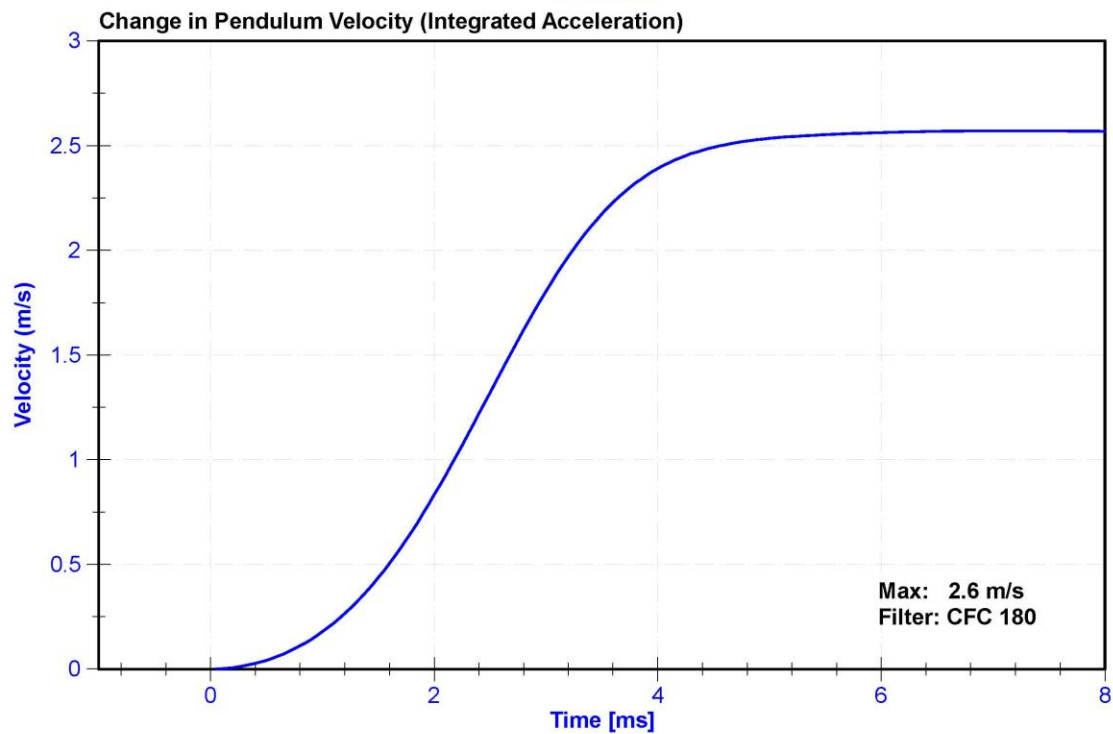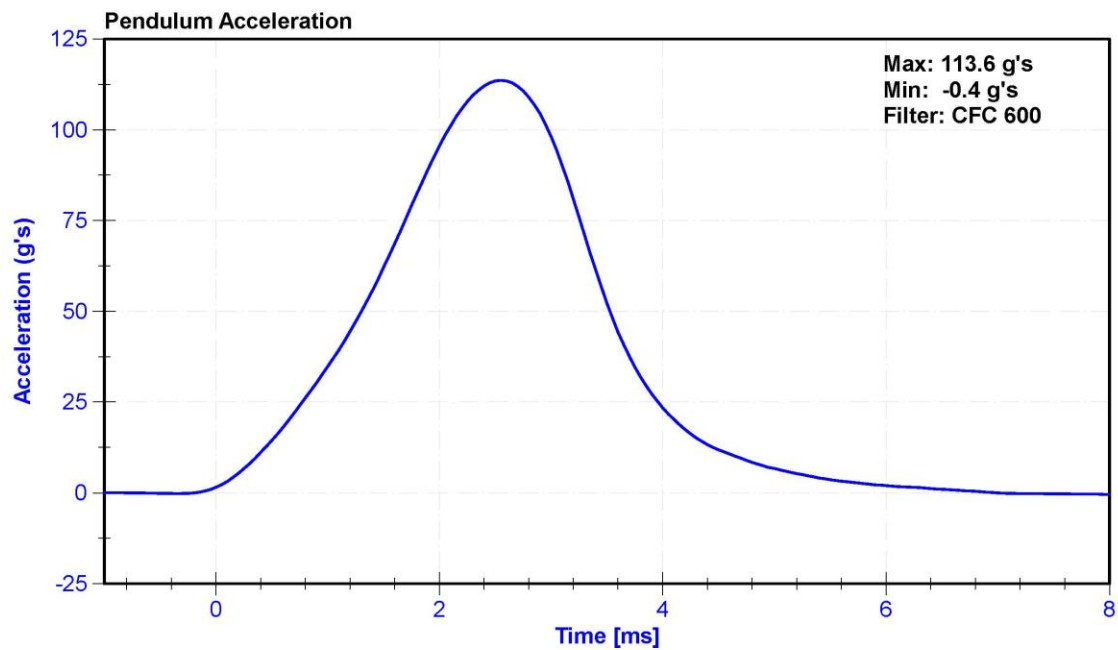


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K.Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.1	Pass
Humidity	10	70	%	57.5	Pass
Velocity	2.07	2.13	m/s	2.102	Pass
Maximum Resistive Force	4720	5780	N	5737.6	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	2/21/2019	8/22/2019

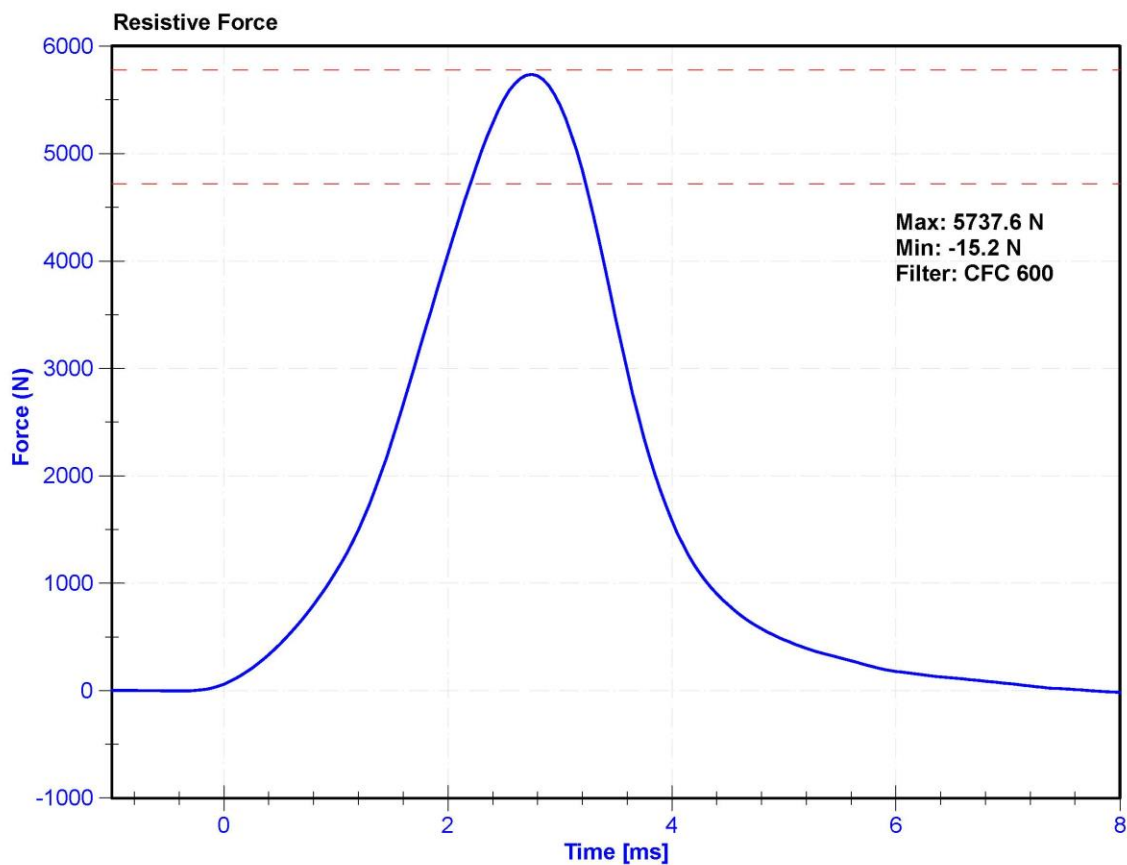

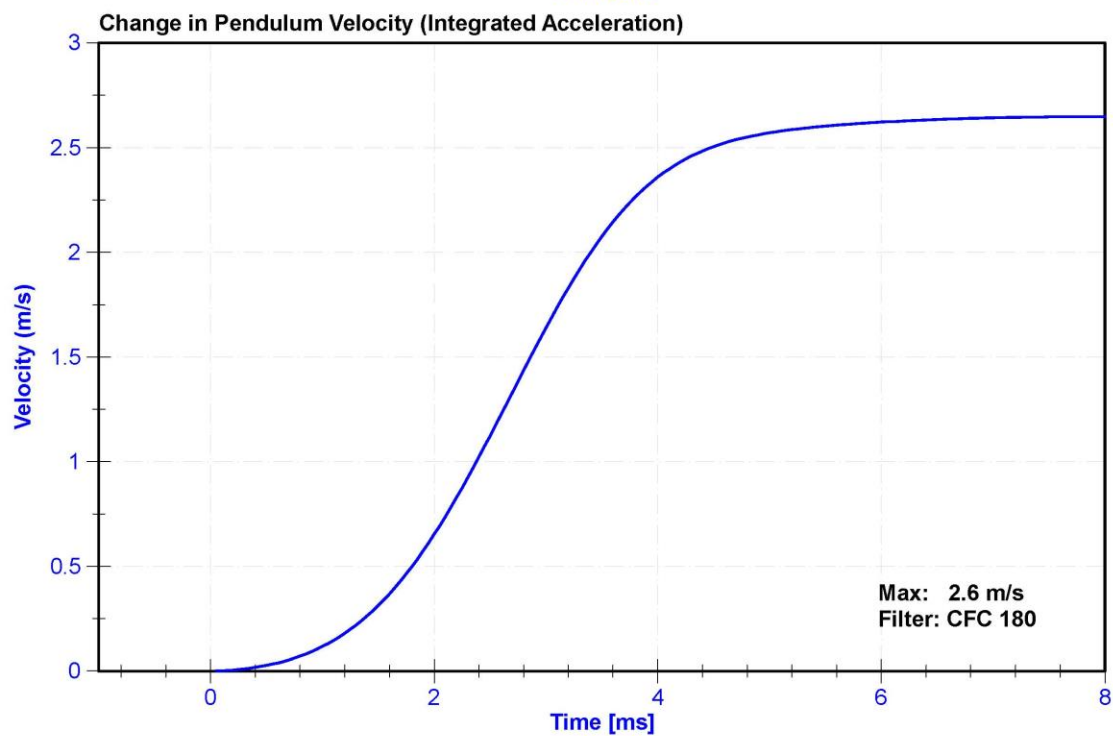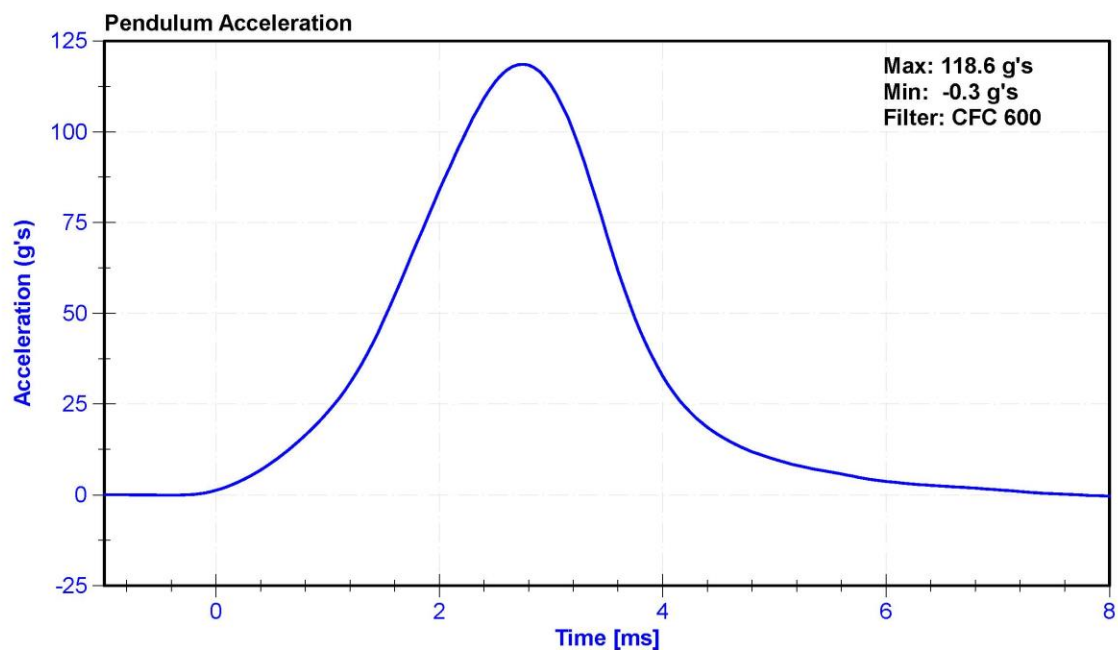

CALIBRATION TEST RESULTS

POST-TEST

HYBRID III 5TH PERCENTILE FEMALE - PASSENGER ATD

SERIAL NO: 288





External Measurements - Hybrid 3 - 5th Female

Technician: K. Dutton

Date: 07/19/2019

Dummy Serial Number: 288

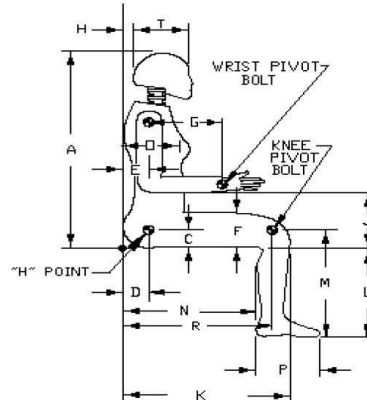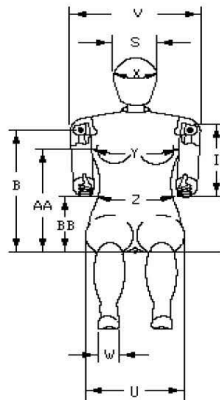

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	775	800	787	Pass
B	Shoulder Pivot Height	432	457	450	Pass
C	H-Point Height	81	86	84	Pass
D	H-Point from Backline	145	150	148	Pass
E	Shoulder Pivot from Backline	69	84	77	Pass
F	Thigh Clearance	119	135	126	Pass
G	Back of Elbow to Wrist Pivot	244	259	256	Pass
H	Head Back to Backline	43	48	45	Pass
I	Shoulder to Elbow Length	277	297	284	Pass
J	Elbow Rest Height	183	203	192	Pass
K	Buttock to Knee Length	521	546	538	Pass
L	Popliteal Height	356	376	365	Pass
M	Knee Pivot Height	394	419	407	Pass
N	Buttock Popliteal Length	414	439	429	Pass
O	Chest Depth without Jacket	175	191	180	Pass
P	Foot Length (right)	219	234	221	Pass
R	Buttock To Knee Pivot Length	457	483	465	Pass
S	Head Breadth	137	147	142	Pass
T	Head Depth	178	188	183	Pass
U	Hip Breadth	300	315	310	Pass
V	Shoulder Breadth	351	366	361	Pass
W	Foot Breadth	79	94	85	Pass
X	Head Circumference	528	549	537	Pass
Y	Chest Circumference with Jacket	851	881	865	Pass
Z	Waist Circumference	460	790	777	Pass
AA	Reference Location (Chest Circumference)	333	358	345	Pass
BB	Reference Location (Waist Circumference)	160	170	164	Pass


ATD Manufacturer	FTSS	Test Technician	K. Dutton
ATD Serial Number	288	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.9	Pass
Humidity	10	70	%	50.5	Pass
Resultant Acceleration	250	300	g's	254.8	Pass
Oscillation	0	10	%	1.1	Pass
Lateral Acceleration	-15	15	g's	-3.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P52133	4/9/2019	10/8/2019
Y Accelerometer	ENDEVCO 7264	AC-P12359	4/9/2019	10/8/2019
Z Accelerometer	ENDEVCO 7264CT	AC-P58871	4/9/2019	10/8/2019

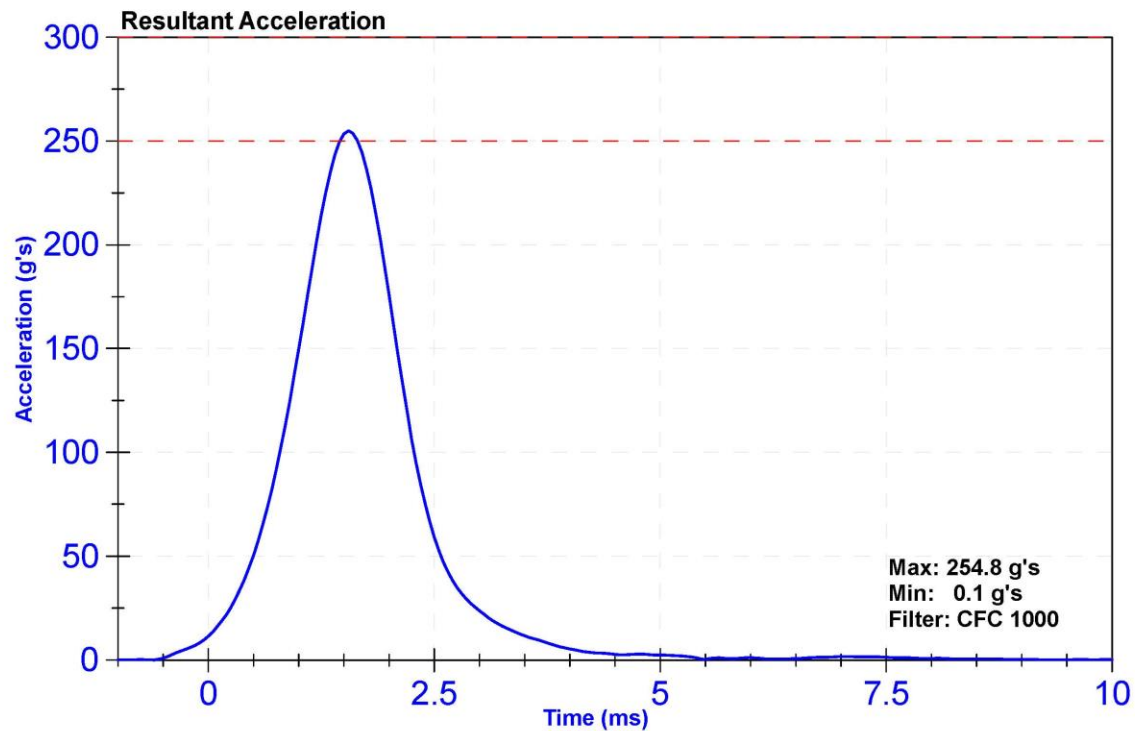

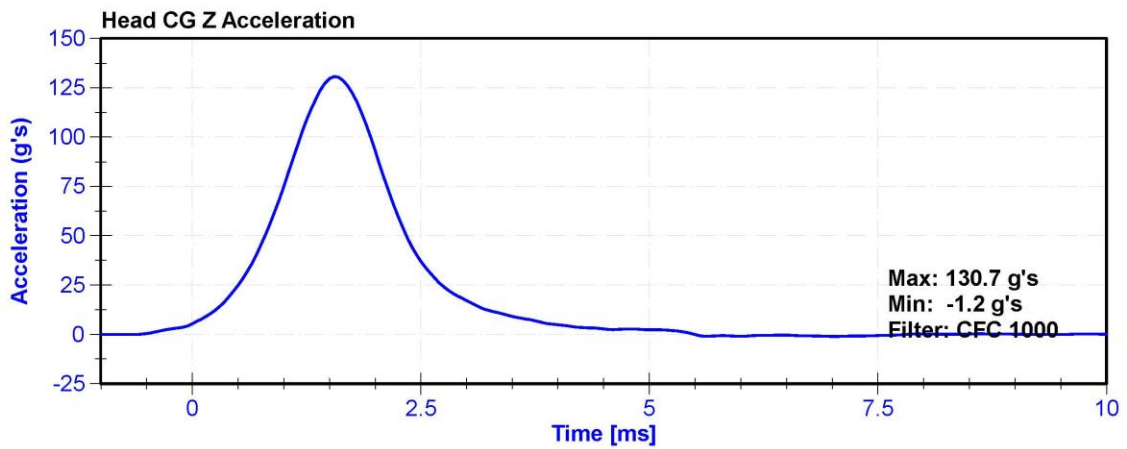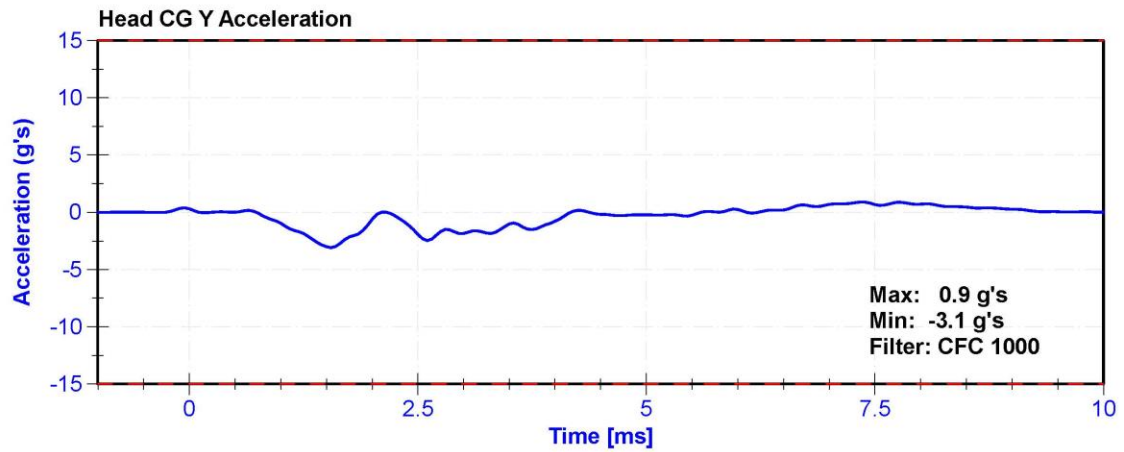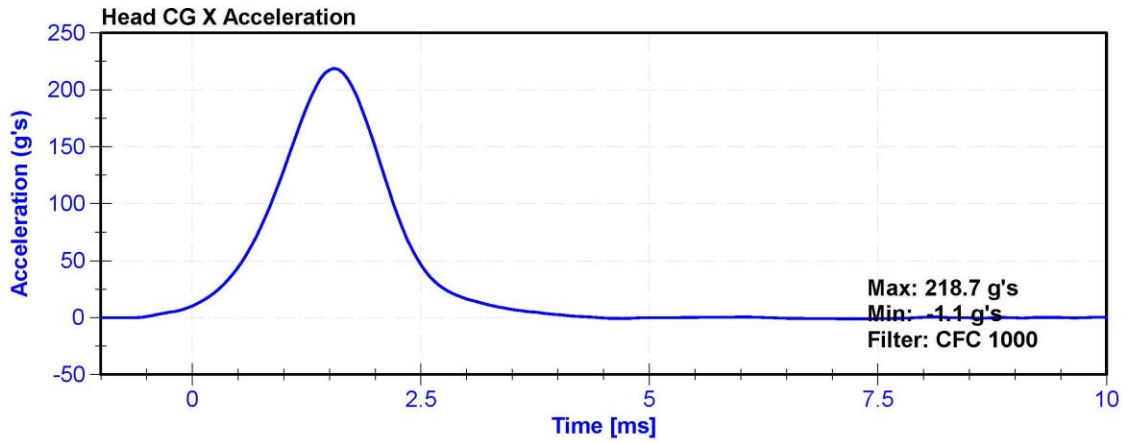


ATD Manufacturer	FTSS	Test Technician	C. Mantell
ATD Serial Number	288	Laboratory Supervisor	K. Brogan



Results


Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	48.5	Pass
Velocity	6.89	7.13	m/s	6.958	Pass
Pendulum Impulse at 10ms	2.1	2.5	m/s	2.29	Pass
Pendulum Impulse at 20ms	4.0	5.0	m/s	4.53	Pass
Pendulum Impulse at 30ms	5.8	7.0	m/s	6.51	Pass
Max D Plane Rotation	77	91	deg	80.8	Pass
Max Moment During Rotation Interval	69	83	Nm	74.0	Pass
Moment Decay to 10.0 Nm	80	100	ms	88.2	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	11/15/2018	11/15/2019
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	11/15/2018	11/15/2019
Upper Neck Load Cell	DENTON 1716A	LC-1591Fx	9/28/2018	9/28/2019

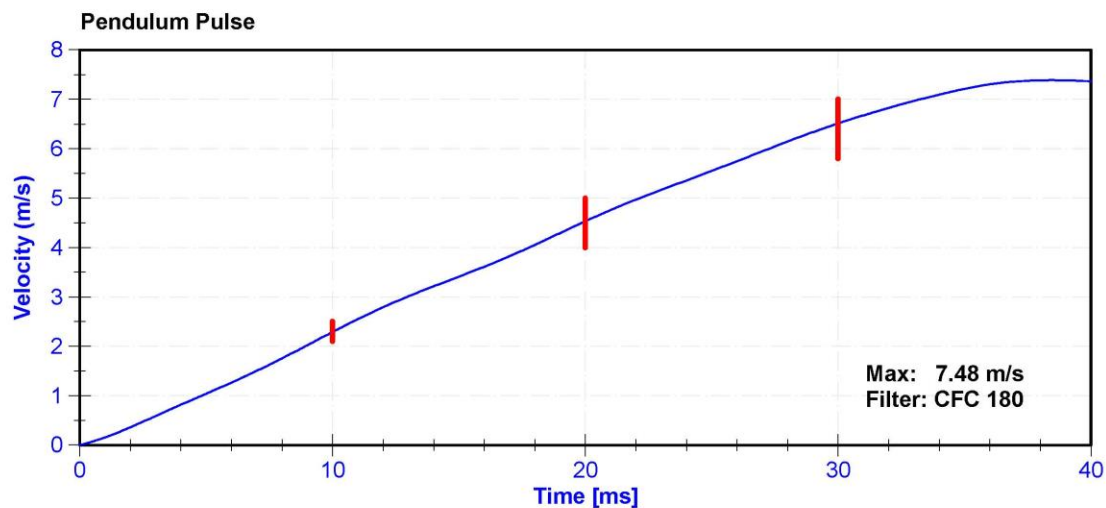

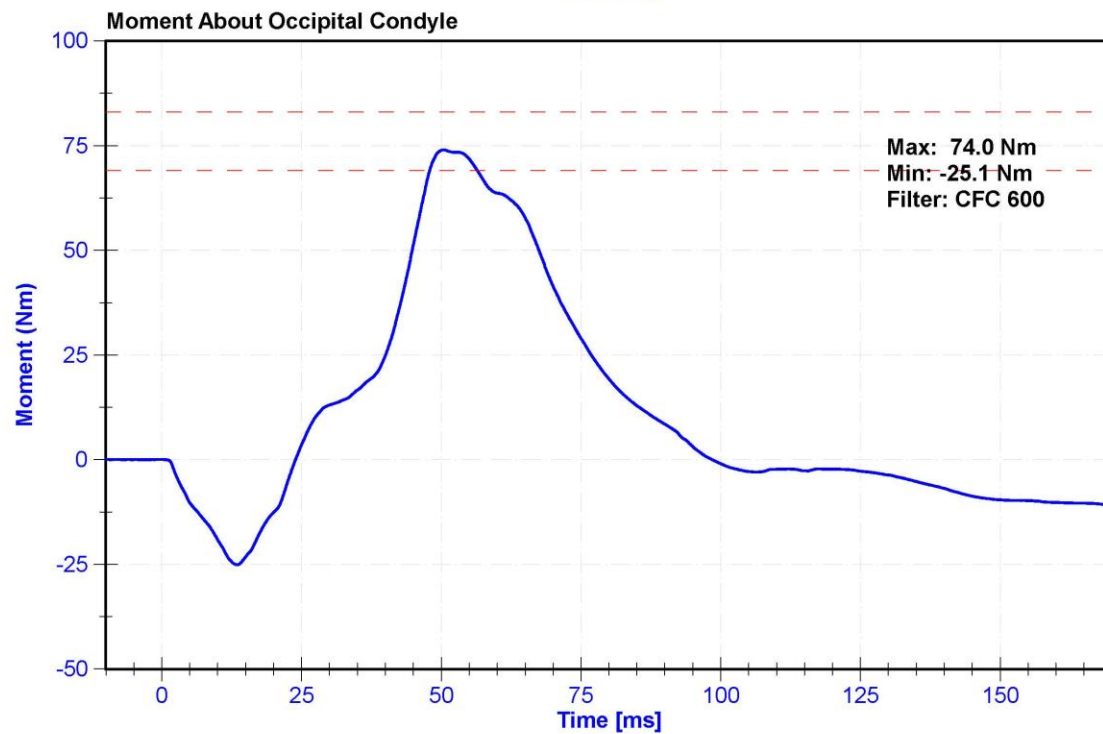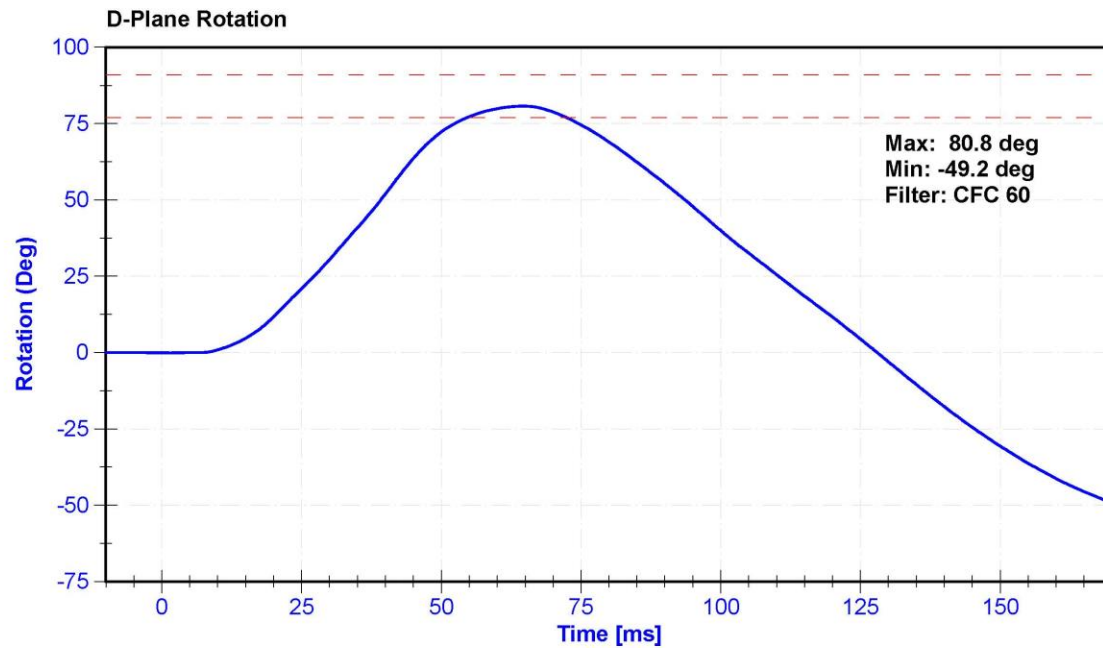

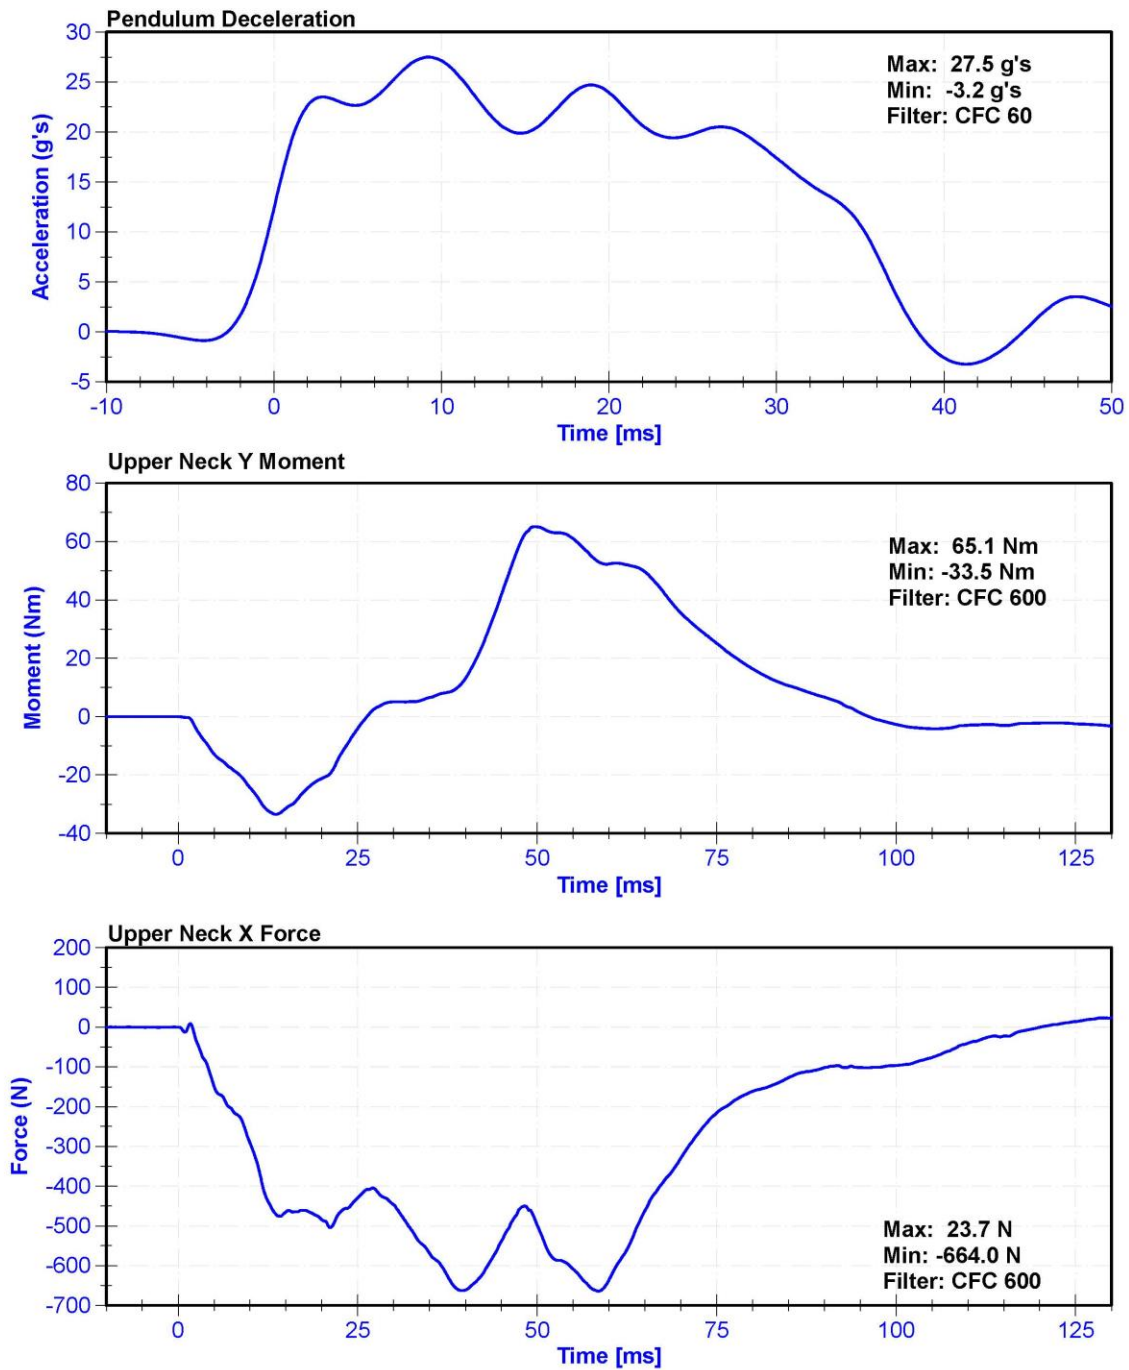


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	288	Laboratory Supervisor	K. Brogan



Results




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.2	Pass
Humidity	10	70	%	62.9	Pass
Velocity	5.95	6.19	m/s	6.005	Pass
Pendulum Impulse at 10ms	1.5	1.9	m/s	1.75	Pass
Pendulum Impulse at 20ms	3.1	3.9	m/s	3.73	Pass
Pendulum Impulse at 30ms	4.6	5.6	m/s	5.59	Pass
D Plane Rotation	99	114	deg	105.1	Pass
Moment During Rotation Interval	-65	-53	Nm	-63.3	Pass
Moment Decay to -10Nm	94	114	ms	100.2	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	11/15/2018	11/15/2019
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	11/15/2018	11/15/2019
Upper Neck Load Cell	DENTON 1716A	LC-1591Fx	9/28/2018	9/28/2019

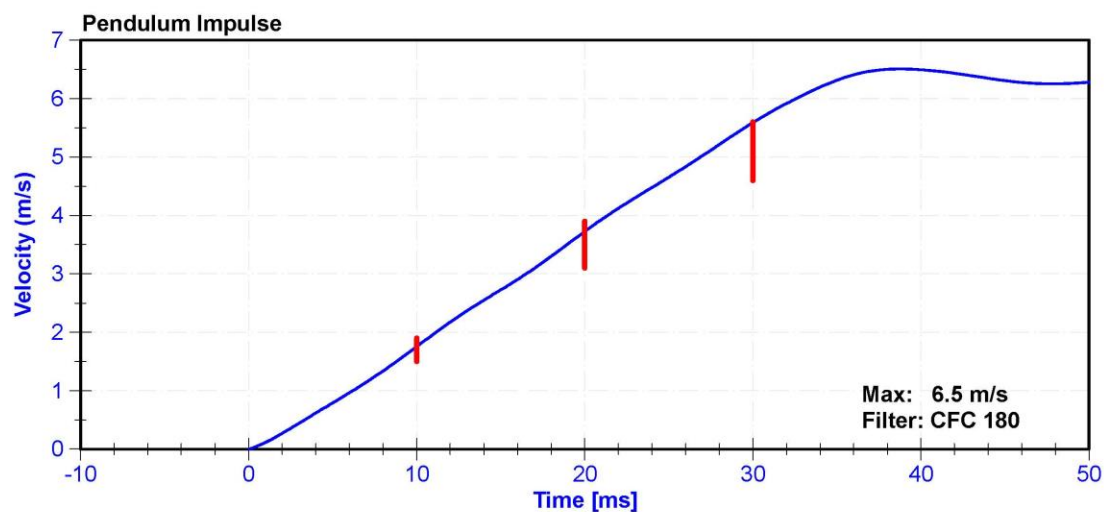

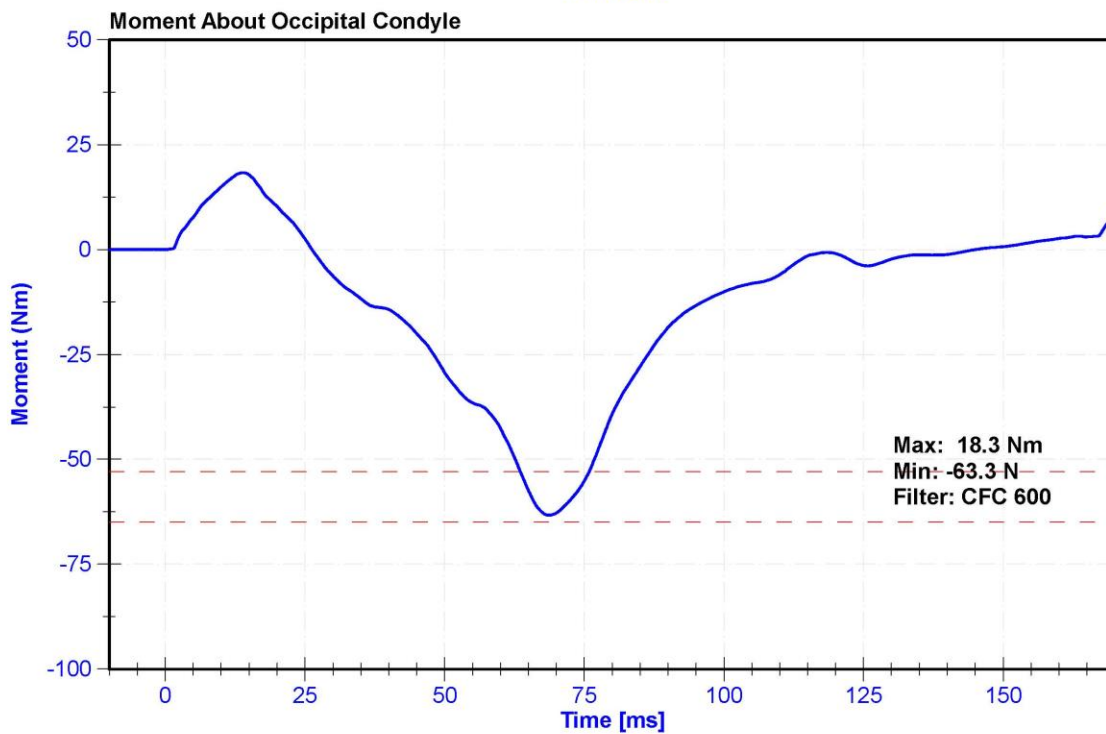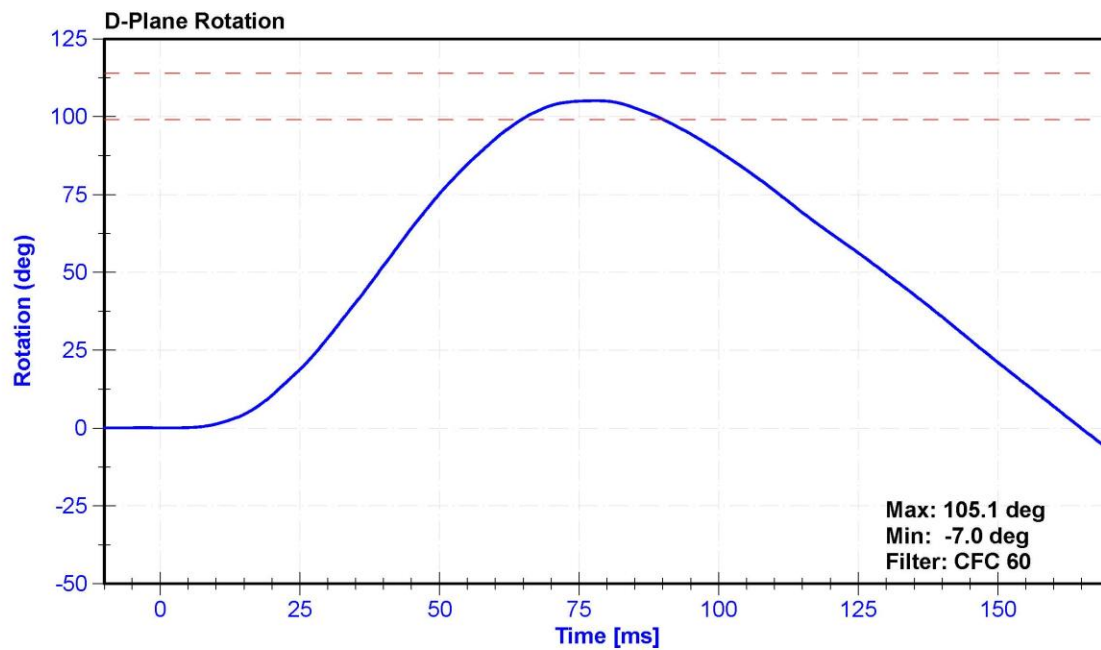

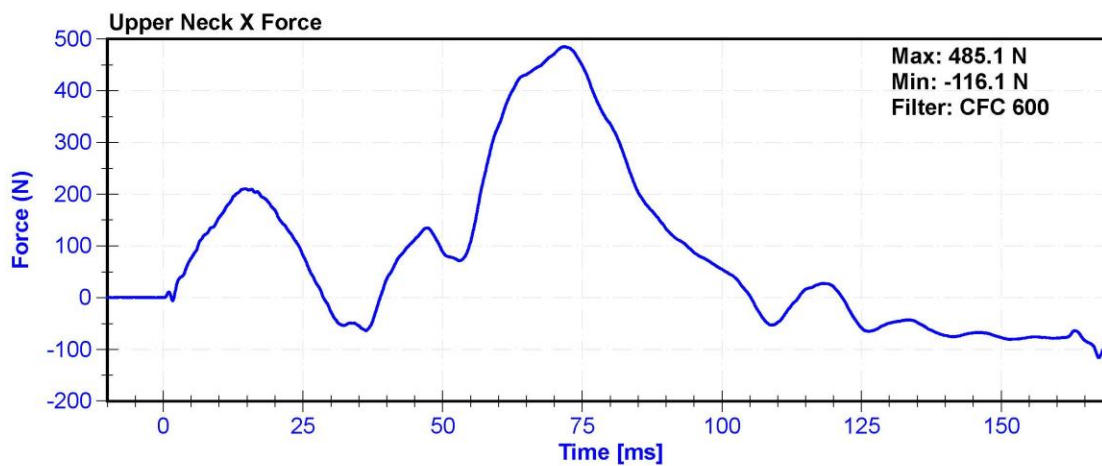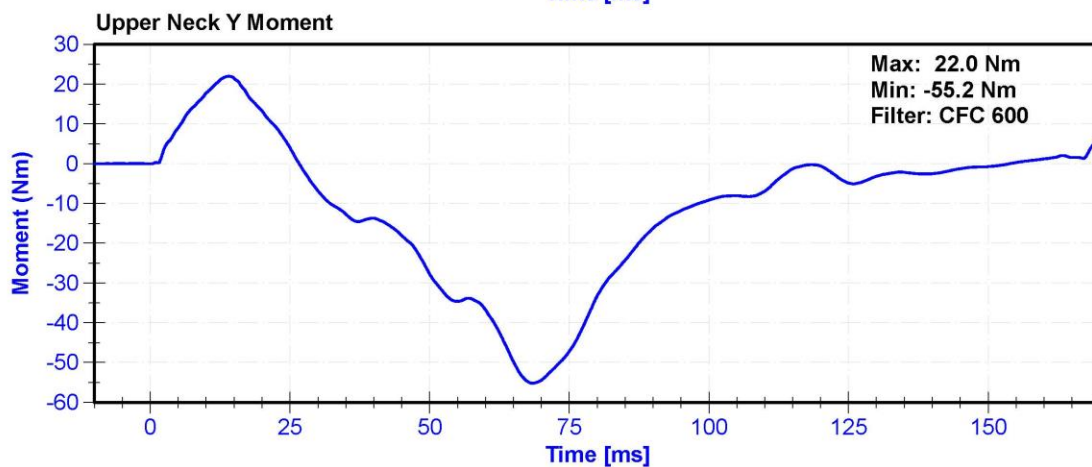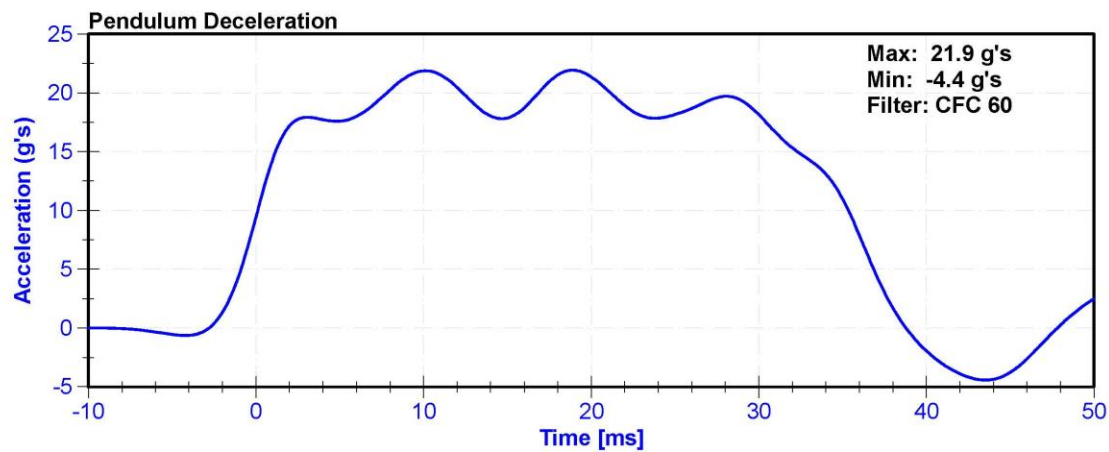


ATD Manufacturer	FTSS	Test Technician	K. Dutton
ATD Serial Number	288	Laboratory Supervisor	K. Brogan



Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.3	Pass
Humidity	10	70	%	64.3	Pass
Velocity	6.59	6.83	m/s	6.626	Pass
Chest Deflection	-58	-50	mm	-51.7	Pass
Maximum Resistive Force (50 to 58mm)	3900	4400	N	4347.2	Pass
Maximum Resistive Force (18 to 50mm)	0	4600	N	4347.2	Pass
Hysteresis	69	85	%	71.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	2/21/2019	8/22/2019
Chest Potentiometer	SERVO 14CBI-3615	DS-140GFE	6/21/2019	6/20/2020

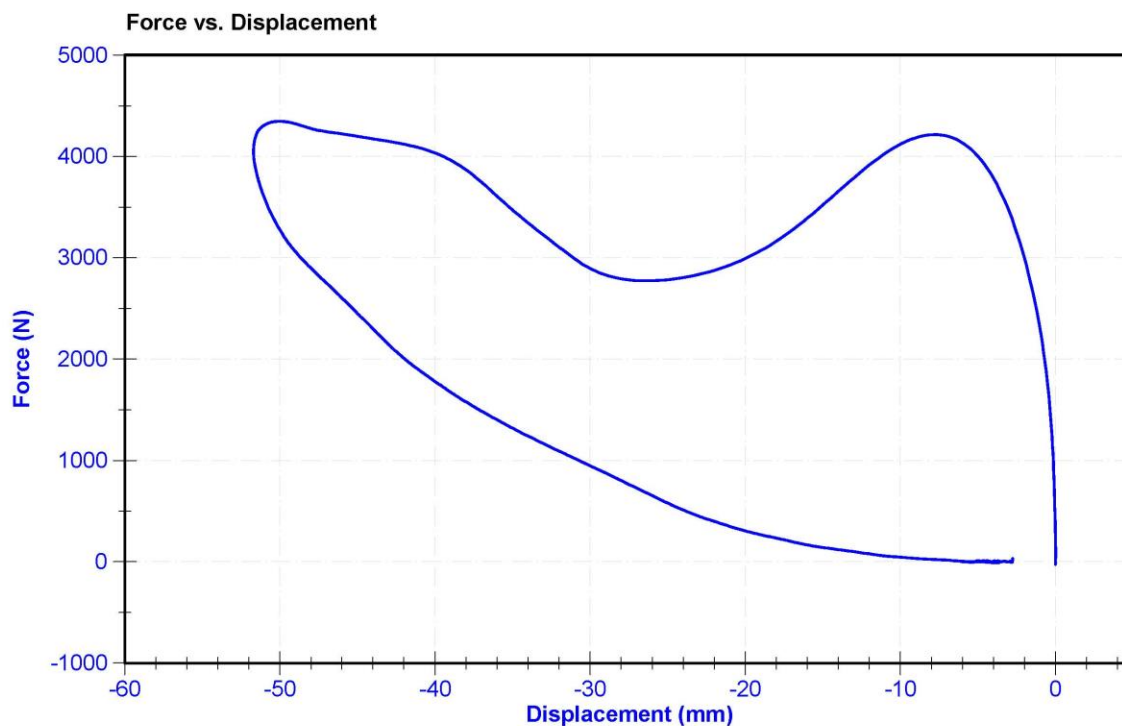

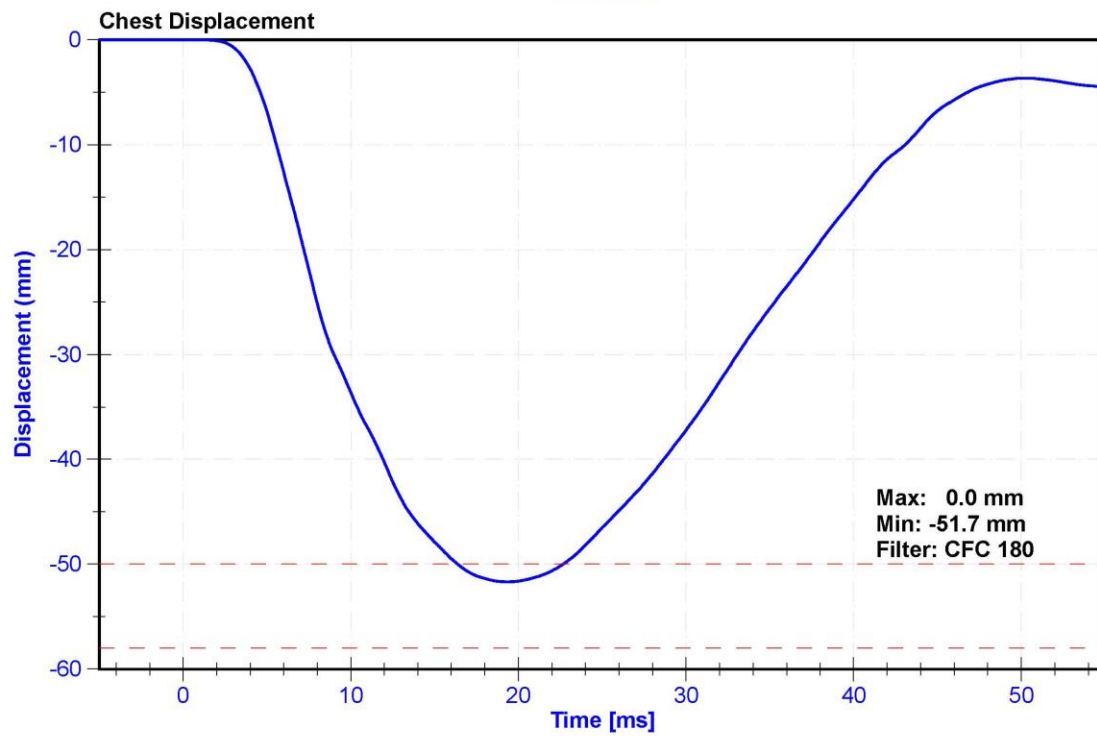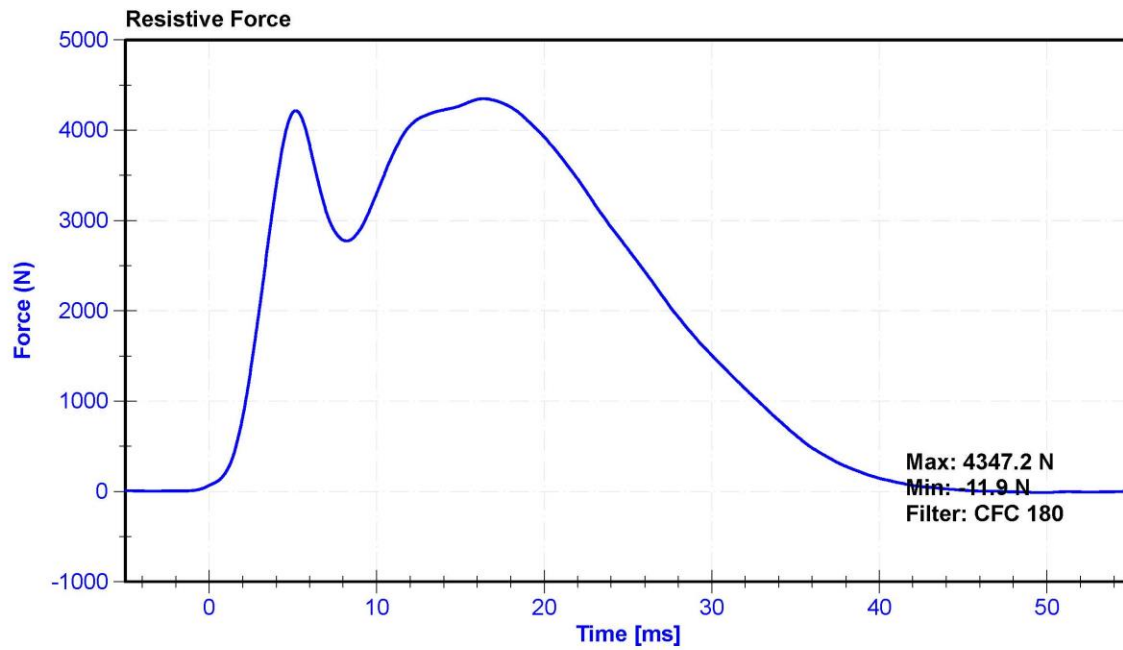

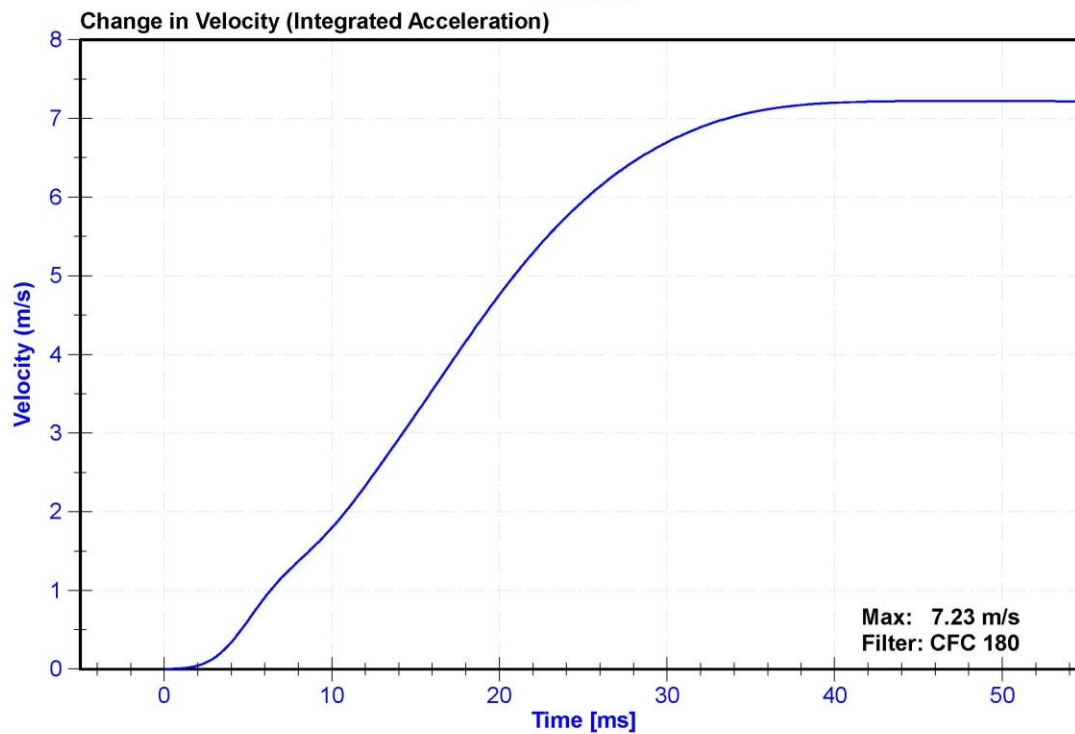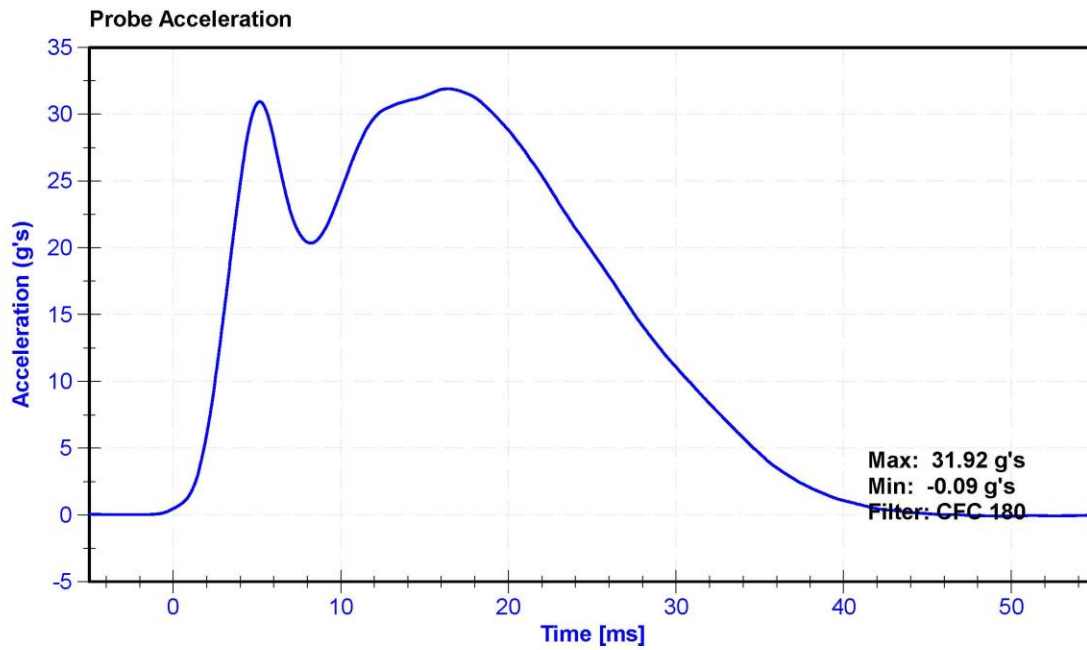


ATD Manufacturer	FTSS	Test Technician	K. Dutton
ATD Serial Number	288	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.6	25.6	°C	20.9	Pass
Humidity	10	70	%	59.9	Pass
Initial Angle	0	20	deg	14.7	Pass
Force at 45 Degrees	320	390	N	320.9	Pass
Return Angle Relative to Initial	0	8	deg	2.6	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	Rieker N4C-1	DS-13051548	10/25/2018	10/25/2019
Load Cell	Interface SML-200	LC-493319	10/25/2018	10/25/2019

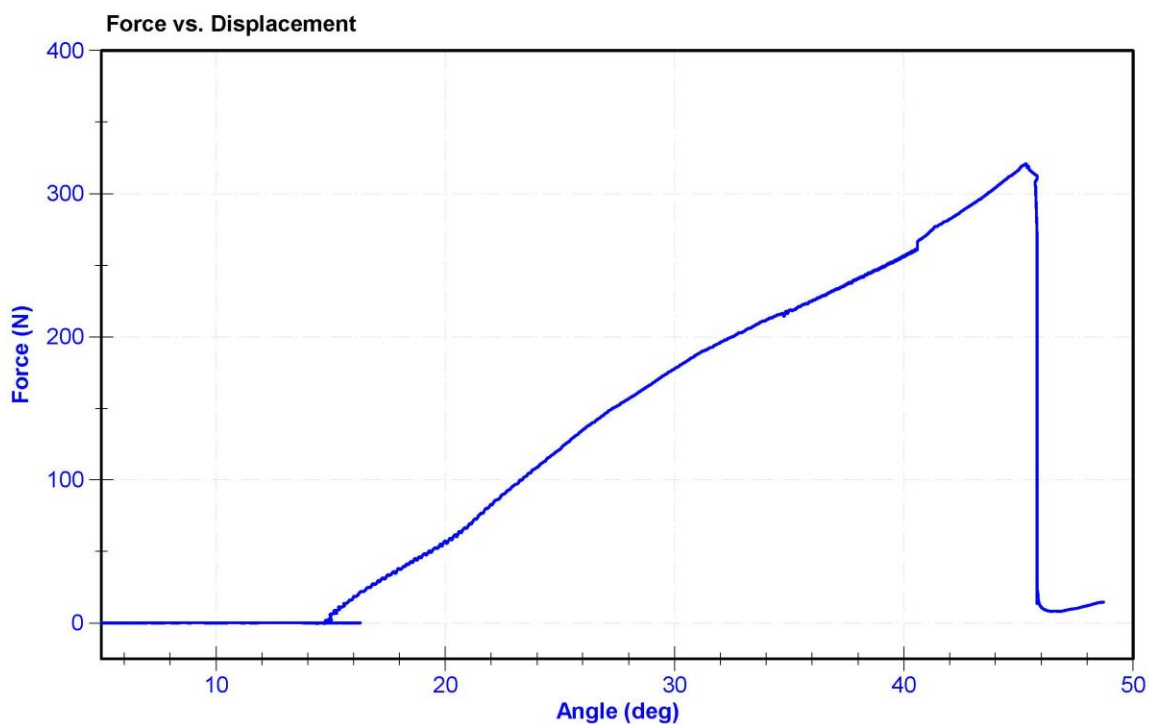


ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	288	Laboratory Supervisor	K.Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.2	Pass
Humidity	10	70	%	51.1	Pass
Velocity	2.07	2.13	m/s	2.096	Pass
Resistive Force	3450	4060	N	3839.5	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	2/21/2019	8/22/2019

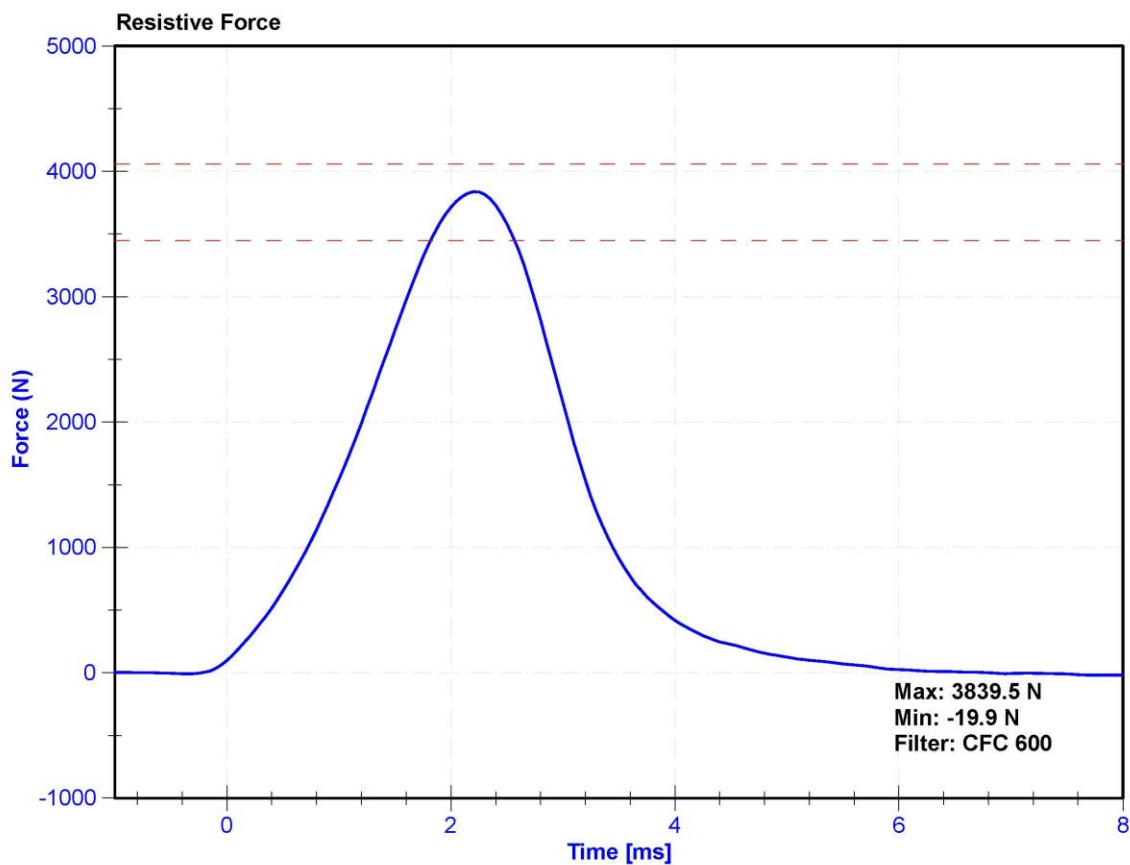

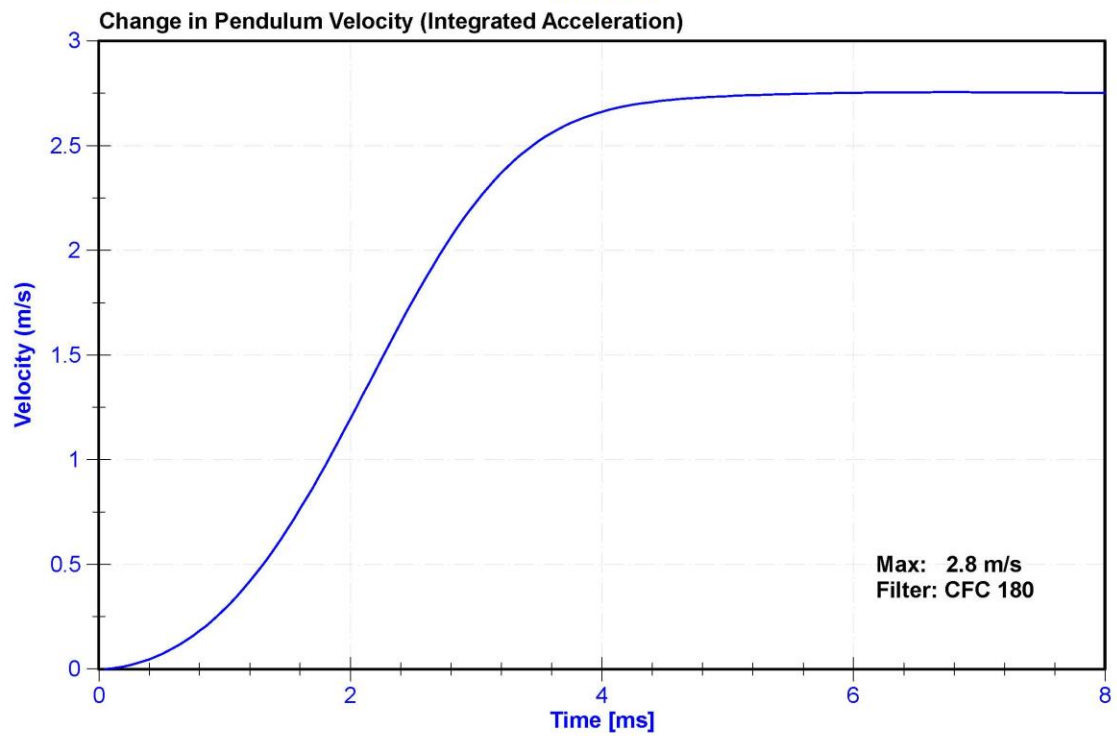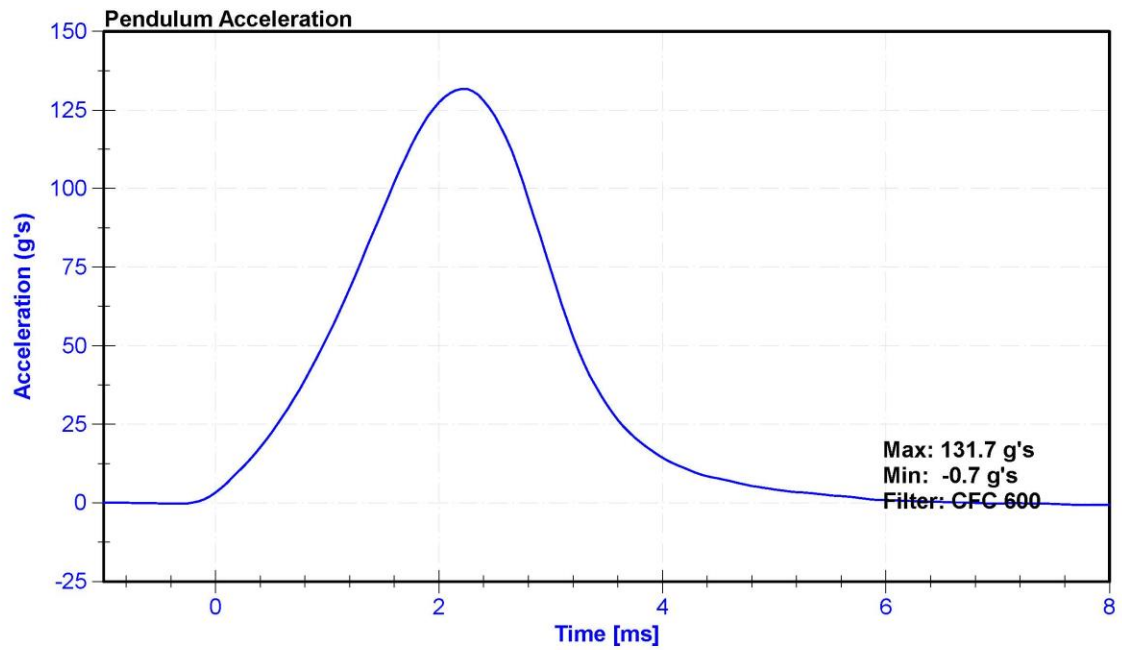

ATD Manufacturer	FTSS	Test Technician	D.Reinhard
ATD Serial Number	288	Laboratory Supervisor	K.Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.8	Pass
Humidity	10	70	%	58.9	Pass
Velocity	2.07	2.13	m/s	2.093	Pass
Resistive Force	3450	4060	N	3786.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260487	2/21/2019	8/22/2019

