

REPORT NUMBER: NCAP-CAL-20-013

**NEW CAR ASSESSMENT PROGRAM (NCAP)
FRONTAL BARRIER IMPACT TEST**

**KIA Motors Corporation
2020 KIA Stinger GT-Line
Four Door Sedan**

NHTSA No: M20204215

**PREPARED BY:
CALSPAN CORPORATION
P.O. BOX 400
BUFFALO, NEW YORK 104625**



June 16, 2020

FINAL REPORT

**PREPARED FOR:
U. S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
OFFICE OF CRASHWORTHINESS STANDARDS
1200 NEW JERSEY AVE SE, ROOM W43-410
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Administration, in response to Contract Number 693JJ919D000005.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof.

If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: Matthew Pronko
Matthew Pronko, Test Engineer

Date: June 16, 2020

Approved by: Vanessa Hansen
Vanessa Hansen, Operations Manager

Date: June 16, 2020

FINAL REPORT ACCEPTANCE BY OCWS:

Division Chief, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

COTR, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

TECHNICAL REPORT DOCUMENTATION PAGE

1. Report No. NCAP-CAL-20-013		2. Government Accession No.		3. Recipient's Catalog No.																																																					
4. Title and Subtitle Final Report of New Car Assessment Program Frontal Impact Testing of a 2020 KIA Stinger GT-Line four door sedan NHTSA No.: M20204215				5. Report Date June 16, 2020																																																					
				6. Performing Organization Code CAL																																																					
7. Author(s) Matthew Pronko, Test Engineer Vanessa Hansen, Operations Manager				8. Performing Organization Report No. CAL-DOT-2020-013																																																					
9. Performing Organization Name and Address Calspan Corporation Transportation Test Operations P.O. Box 400 Buffalo, New York 104625				10. Work Unit No.																																																					
				11. Contract or Grant No. 693JJ919D000005																																																					
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards 1200 New Jersey Ave., SE, Room W43-410 Washington, D.C. 20590				13. Type of Report and Period Covered: Final Test Report April 21, 2020 - June 16, 2020																																																					
				14. Sponsoring Agency Code NRM-110																																																					
15. Supplementary Notes																																																									
16. Abstract A 56.30 km/h (35 mph), NCAP frontal rigid barrier impact test was conducted on a 2020 KIA Stinger GT-Line four door sedan in accordance with the specifications of the Office of Crashworthiness Standards Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing. This test was conducted to obtain data related to FMVSS Nos. 208, 212, 219 (partial), 301, and 305 performance. The test was conducted at Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on April 21, 2020. The impact velocity of the vehicle was 56.26 km/h, and the ambient temperature at the barrier face at the time of impact was 21°C. The target vehicle post-test maximum crush was 583 mm at C3 to the left side of the front bumper. The test vehicle's occupant performance data is as follows: <table border="1"> <thead> <tr> <th rowspan="2">Measurement Description</th> <th rowspan="2">Units</th> <th colspan="2">Driver ATD (Serial No. 142)</th> <th colspan="2">Passenger ATD (Serial No. 139)</th> </tr> <tr> <th>Threshold</th> <th>Result</th> <th>Threshold</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC₁₅)</td> <td></td> <td>700</td> <td>161.228</td> <td>700</td> <td>219.871</td> </tr> <tr> <td>Maximum Chest Compression</td> <td>mm</td> <td>63</td> <td>-25.450</td> <td>52</td> <td>-23.415</td> </tr> <tr> <td>Nij</td> <td></td> <td>1</td> <td>0.183</td> <td>1</td> <td>0.366</td> </tr> <tr> <td>Neck Tension</td> <td>N</td> <td>4,170</td> <td>608.859</td> <td>2,620</td> <td>769.876</td> </tr> <tr> <td>Neck Compression</td> <td>N</td> <td>4,000</td> <td>-277.376</td> <td>2,520</td> <td>-144.071</td> </tr> <tr> <td>Left Femur Force</td> <td>N</td> <td>10,008</td> <td>-431.661</td> <td>6,805</td> <td>-236.461</td> </tr> <tr> <td>Right Femur Force</td> <td>N</td> <td>10,008</td> <td>-1577.749</td> <td>6,805</td> <td>-113.217</td> </tr> </tbody> </table>						Measurement Description	Units	Driver ATD (Serial No. 142)		Passenger ATD (Serial No. 139)		Threshold	Result	Threshold	Result	Head Injury Criteria (HIC ₁₅)		700	161.228	700	219.871	Maximum Chest Compression	mm	63	-25.450	52	-23.415	Nij		1	0.183	1	0.366	Neck Tension	N	4,170	608.859	2,620	769.876	Neck Compression	N	4,000	-277.376	2,520	-144.071	Left Femur Force	N	10,008	-431.661	6,805	-236.461	Right Femur Force	N	10,008	-1577.749	6,805	-113.217
Measurement Description	Units	Driver ATD (Serial No. 142)		Passenger ATD (Serial No. 139)																																																					
		Threshold	Result	Threshold	Result																																																				
Head Injury Criteria (HIC ₁₅)		700	161.228	700	219.871																																																				
Maximum Chest Compression	mm	63	-25.450	52	-23.415																																																				
Nij		1	0.183	1	0.366																																																				
Neck Tension	N	4,170	608.859	2,620	769.876																																																				
Neck Compression	N	4,000	-277.376	2,520	-144.071																																																				
Left Femur Force	N	10,008	-431.661	6,805	-236.461																																																				
Right Femur Force	N	10,008	-1577.749	6,805	-113.217																																																				
17. Key Words 56.3 km/h (35 mph) Full Frontal Rigid Barrier Impact Test New Car Assessment Program (NCAP)				18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division 1200 New Jersey Ave, SE Washington, DC 20590																																																					
19. Security Class. (of this report) UNCLASSIFIED		20. Security Class. (of this page) UNCLASSIFIED		21. No. of Pages 169	22. Price																																																				

Form DOT F1700.7 (8-69)

TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
1	Purpose and Summary of the Test	1-1
2	Occupant and Vehicle Information / Data Sheets	2-1
<u>Data Sheet</u>		<u>Page</u>
1	General Test and Vehicle Parameter Data	2-2
2	Seat Adjustment, Fuel System, and Steering Wheel Data	2-6
3	Dummy Longitudinal Clearance Dimensions	2-8
4	Dummy Lateral Clearance Dimensions	2-9
5	Seat Belt Positioning Data	2-10
6	High-Speed Camera Locations and Data	2-11
7	Vehicle Accelerometer Locations	2-13
8	Photographic Reference Target Locations	2-14
9	Load Cell Locations on Fixed Barrier	2-15
10	Test Vehicle Summary of Results	2-16
11	Post-Test Observations	2-17
12	Vehicle Profile Measurements	2-18
13	Accident Investigation Division Data	2-20
14	Vehicle Intrusion Measurements	2-21
15	Summary of Indicant FMVSS No.212 and FMVSS No.219 (Partial) Data	2-23
16	FMVSS 301 Barrier Impact & Static Rollover Results	2-25
17	Dummy/Vehicle Temperature Stabilization Chart	2-26
<u>Appendix</u>		<u>Page</u>
A	Photographs	A-1
B	Dummy Response Data Traces	B-1
C	Dummy Calibration and Performance Verification Data	C-1
D	Test Equipment and Instrumentation Calibration	D-1

SECTION 1

PURPOSE AND SUMMARY OF TEST

PURPOSE

This 56.3 km/h frontal barrier impact test is part of the Vehicle Barrier Impact Testing Program sponsored by the National Highway Traffic Safety Administration (NHTSA) under Contract No. 693JJ919D000005. The purpose of this test was to obtain vehicle crashworthiness and occupant restraint system performance data for consumer information purposes.

The 56.3 km/h frontal barrier impact test was conducted in accordance with the Office of Crashworthiness Standards Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing.

SUMMARY

A load cell barrier consisting of 128 load cells was impacted by a 2020 KIA Stinger GT-Line four door sedan at a velocity of 56.26 km/h. The test was performed at Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on April 21, 2020. Pre- and post-test photographs of the vehicle and dummies to document the test can be found in Appendix A. One real-time camera and 16 high-speed cameras were used to document the frontal barrier impact event. Camera locations and other pertinent camera information can be found in Data Sheet 6 of this report.

One Part 572E, 50th percentile male anthropomorphic test device (ATD), was placed in the driver seating position and one Part 572O 5th percentile female ATD was placed in the right-front passenger seating position according to dummy placement instructions specified in the Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing. Both ATDs were fully instrumented with head, chest and pelvis tri-axial accelerometers, chest displacement potentiometers, upper neck transducers, femur load cells, and lower leg instrumentation. Seat belt load cells were installed on the driver's shoulder belt to measure dummy torso section loading. The driver (position 1) ATD (Serial No. 142) and the right-front passenger (position 2) ATD (Serial No. 139) were qualified prior to this test. Certification details, along with instrumentation calibration data, can be found in Appendix C of this report.

The 486 channels of data were recorded on an on-board data acquisition system. Appendix B contains the vehicle, load cell barrier and dummy response data traces.

There was 100 percent windshield retention and no intrusion into the protected zone of the windshield during the event. There was a total of 0.0 grams of stoddard solvent leakage after the event or during any phase of the static rollover. The maximum static crush of the vehicle was 583 mm and both driver and passenger side doors remained closed during the impact event and were operable after the impact.

The driver's visible contact points were as follows: The driver's head contacted the frontal airbag and then the head restraint. The upper torso contacted the frontal airbag. Both knees contacted the knee air bag.

The passenger's visible contact points were as follows: The passenger's head contacted the frontal airbag and then the head restraint. The upper torso contacted the frontal airbag.

The occupant data is summarized below.

ATD Position	HIC ₁₅	Nij	Neck Tension (N)	Neck Comp. (N)	3ms Chest Clip (Gs)	Chest Disp. (mm)	Left Femur (N)	Right Femur (N)
Driver (50 th)	161.228	0.183	608.859	-277.376	43.308	-25.450	-431.661	-1577.749
Passenger (5 th)	219.871	0.366	769.876	-144.071	43.762	-23.415	-236.461	-113.217

GENERAL COMMENTS:

1. P1 (Driver) serial number - 142
2. P2 (Passenger) serial number – 139
3. No seatbelt load cells were placed on Passenger belt per OEM specification.
4. Driver lap belt load cell was not used per OEM specification
5. Vehicle body design is considered a four door sedan however the vehicle's rear compartment functions like a hatchback

Data Anomalies:

- None

SECTION 2

OCCUPANT AND VEHICLE INFORMATION / DATA SHEETS

This section contains information reporting for the following Data Sheets:

Data Sheet No. 1 – General Test and Vehicle Parameter Data

Data Sheet No. 2 – Seat Adjustment, Fuel System, and Steering Wheel Data

Data Sheet No. 3 – Dummy Longitudinal Clearance Dimensions

Data Sheet No. 4 – Dummy Lateral Clearance Dimensions

Data Sheet No. 5 – Seat Belt Positioning Data

Data Sheet No. 6 – High-Speed Camera Locations and Data

Data Sheet No. 7 – Vehicle Accelerometer Locations

Data Sheet No. 8 – Photographic Reference Target Locations

Data Sheet No. 9 – Load Cell Locations on Fixed Barrier

Data Sheet No. 10 – Test Vehicle Summary of Results

Data Sheet No. 11 – Post-Test Observations

Data Sheet No. 12 – Vehicle Profile Measurements

Data Sheet No. 13 – Accident Investigation Division Data

Data Sheet No. 14 – Vehicle Intrusion Measurements

Data Sheet No. 15 – Summary of Indicant FMVSS No. 212 and FMVSS No. 219 (Partial)

Data Sheet No. 16 – FMVSS 301 Barrier Impact and Static Rollover Results

Data Sheet No. 17 – Dummy/Vehicle Temperature Stabilization Chart

DATA SHEET NO. 1
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20204215
 Test Date: 4/21/2020

TEST VEHICLE INFORMATION AND OPTIONS

NHTSA No.	M20204215	Traction Control System (TCS)	Yes
Model Year	2020	Power Steering	Yes
Make	KIA	Power Window Auto-Reverse	No
Model	Stinger GT-Line	Driver Frontal Airbag	Yes
Body Style	Five Door Hatchback	Driver Curtain Airbag	Yes
VIN	KNAE15LA7L6074115	Driver Head/Torso Airbag	No
Body Color	Black	Driver Torso Airbag	No
Odometer Reading (km /mi)	46 mi	Driver Torso/Pelvis Airbag	Yes
Engine Displacement (L)	2.0	Driver Pelvis Airbag	No
Type / No. Cylinders	I4	Driver Knee Airbag	Yes
Engine Placement	Inline	Front Pass. Frontal Airbag	Yes
Transmission Type	Automatic	Front Pass. Curtain Airbag	Yes
Transmission Speeds	8-Speed	Front Pass. Head/Torso Airbag	No
Overdrive	Yes	Front Pass. Torso Airbag	No
Final Drive	All Wheel Drive	Front Pass. Torso/Pelvis Airbag	Yes
Roof Rack	No	Front Pass. Pelvis Airbag	No
Sunroof / T-Top	Yes	Front Pass. Knee Airbag	No
Running Boards	No	Driver Pretensioner	Yes
Tilt Steering Wheel	Yes	Driver Load Limiter	Yes
Power Seats	Yes	Front Pass. Pretensioner	Yes
Anti-Lock Brakes (ABS)	Yes	Front Pass. Load Limiter	Yes
Automatic Door Locks (ADLs)	Yes	Other –	-

Does owner's manual provide instructions to turn off automatic door locks?

No

DATA FROM CERTIFICATION LABEL

Manufactured By	KIA Motors Corporation	GVWR (kg)	2235
Date of Manufacture	08/19	GAWR Front (kg)	1115
		GAWR Rear (kg)	1230

VEHICLE SEATING AND WEIGHT CAPACITY DATA


Measured Parameter	Front	Rear	Third	Total
Type of Seats	Bucket	Bench	N/A	
Number of Occupants	2	3	N/A	5
Capacity Wt. (VCW) (kg)				410
Cargo Wt. (RCLW) (kg)				69.8

DATA SHEET NO. 1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20204215
 Test Date: 4/21/2020

Collect items circled in red, tire manufacturer, and tire name.

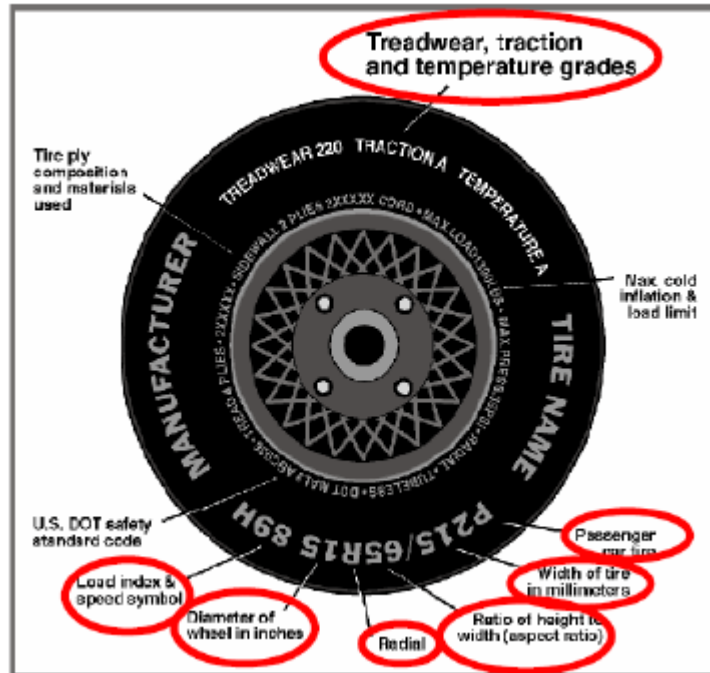

VEHICLE TIRE INFORMATION

Measured Parameter	Front	Rear
Maximum Tire Pressure (kPa)	340	340
Cold Pressure (kPa)	250	270
Recommended Tire Size	225/45R18	225/45R18
Tire Size on Vehicle	225/45R18	225/45R18
Tire Manufacturer	Bridgestone	Bridgestone
Tire Model	Potenza	Potenza
Treadwear	400	400
Traction	A	A
Temperature Grades	A	A
Tire Plies Sidewall	2 Polyester	2 Polyester
Tire Plies Body	1 Polyester, 2 Steel, 1 Nylon	1 Polyester, 2 Steel, 1 Nylon
Load Index / Speed Symbol	95V	95V
Tire Material	Rubber	Rubber
DOT Safety Code Left	EJJ7DAA4218	EJJ7DAA4318
DOT Safety Code Right	EJJ7DAA4318	EJJ7DAA4318

DATA SHEET NO. 1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20204215
 Test Date: 4/21/2020

TEST VEHICLE WEIGHTS

	Units	As Delivered Weights (UVW)			As Tested Weights (ATW)		
		Front Axle	Rear Axle	Total	Front Axle	Rear Axle	Total
Left	kg	459	427		494	504	
Right	kg	463	423		478	501	
Ratio	%	52	48		49.2	50.8	
Totals	kg	922	850	1772	972	1005	1977

TARGET TEST WEIGHT CALCULATION

Measured Parameter	Units	Value	
Total Delivered Weight (UVW)	kg	1772	(A)
Weight of 1 P572E ATD & 1 P572O ATD	kg	142	(B)
Rated Cargo / Luggage Weight (RCLW)	kg	69.8	(C)
Calculated Vehicle Target Weight (TVTW)	kg	1983.8	(A+B+C)

TEST VEHICLE ATTITUDES AND CG

Condition	Units	LF	RF	LR	RR	CG (aft of front axle)
As Delivered	mm	715	714	704	706	1394
As Tested	mm	704	706	684	686	1478
Post-Test	mm	742	741	689	687	

GENERAL TEST VEHICLE DATA

Measurement Description	Units	Value
Total Vehicle Wheel Base	mm	2907
Total Vehicle Length at Left Side	mm	4732
Total Vehicle Length at Centerline	mm	4830
Total Vehicle Length at Right Side	mm	4732
Weight of Ballast in Cargo Area	kg	40
Weight of Vehicle Components Removed	kg	30.5
Amount of Stoddard Solvent in Fuel Tank	L	55.8

LIST OF COMPONENTS REMOVED TO MEET TEST WEIGHT:

Trunk carpeting, spare tire, jack

DATA SHEET NO.1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20204215
 Test Date: 4/21/2020

TARGET VEHICLE STRUCTURAL MEASUREMENT

No.	Description	Pre-Test
1	Total Length	4830
2	Total Width	1815
3*	Bumper Top Height	507
4*	Bumper Bottom Height	434
5*	Longitudinal Member Top Height	529
6	Distance Between Longitudinal Members	960
7	Longitudinal Member Width	85
8*	Engine Top Height	826
9*	Engine Bottom Height	166
10	Engine and Gearbox Width	352
11	Front Bumper-Engine Distance	651
12*	Front Shock Absorber Fixing Height	853
13*	Bonnet Leading Edge Height	741
14	Front Shock Absorber Fixing Width	1187
15	Front Bumper – Front Axle Distance	824
16	Front Axle – A Pillar Distance	810
17	A-Pillar – B-Pillar Distance	1008
18	B-Pillar – Rear Axle Distance	1088
19	B-Pillar – C-Pillar Distance	1100
20*	Roof Sill Bottom Height	1281
21*	Roof Sill Top Height	1361
22*	Floor Sill Bottom Height	275
23*	Floor Sill Top Height	372

*Height Measurements are taken from the ground
 Note: All measurements are in millimeters


DATA SHEET NO. 2 SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20204215
Test Date: 4/21/2020

NOMINAL DESIGN RIDING POSITION

The driver's seat back was set to the manufacturer's designated angle. The passenger's seat back was positioned in a similar manner as the driver's seat back. Seat back angles are measured at the headrest post bezel using a digital inclinometer.

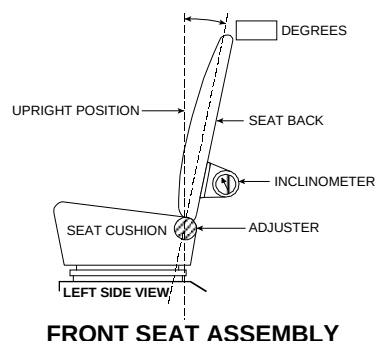

Seating Position	Degrees
Driver Seat Back Angle	2.6
Passenger Seat Back Angle	0.7

SEAT FORE / AFT POSITIONS


The driver's seat was positioned at the mid-point of fore/aft travel at its lowest position. The passenger's seat was positioned at the most forward position of fore/aft travel. Zero is defined as the forward most position.

Seating Position	Total Fore / Aft Travel	Placed in Position #
Driver Seat	290	145
Passenger Seat	240	0

SEAT BELT UPPER ANCHORAGE

The driver's seat belt anchorage was positioned according to the manufacturer's designated positioning for a 50th percentile adult male ATD. The passenger's seat belt anchorage was positioned according to the manufacturer's designated positioning for a 5th percentile adult female ATD. For this test zero is defined as the uppermost position.

Seating Position	Total # of Positions	Placed in Position #
Driver Seat	4 (0-3)	0
Passenger Seat	4 (0-3)	0

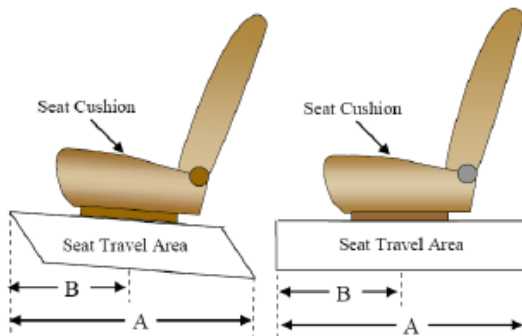

DATA SHEET NO. 2 ... (CONTINUED)
SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
 Test Program: NCAP Frontal Barrier Impact Test


NHTSA No.: M20204215
 Test Date: 4/21/2020

FUEL TANK CAPACITY

Description	Liters
Usable Capacity of "Standard Tank"	60
Usable Capacity of "Optional Tank"	N/A
92%-94% of Usable Capacity	55.2 – 56.4
Actual Amount of Solvent Used	55.8
1/3 of Usable Capacity	20


FUEL PUMP

The vehicle is equipped with an electric fuel pump. The fuel filler neck is on the left side of the vehicle. The pump creates positive pressure in the fuel lines, pushing the gasoline to the engine. See form 1 for more information.

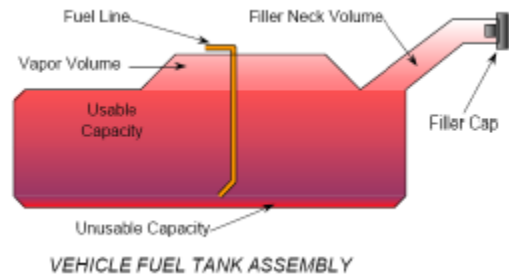

STEERING COLUMN ADJUSTMENT

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes when moved through its full range of motion. For angular measurements, a digital inclinometer was used to measure a plate which was placed across the steering wheel rim. A tape measure was used to measure the telescoping steering wheel travel.

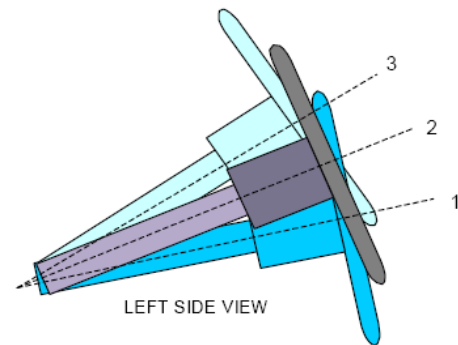

STEERING COLUMN ASSEMBLY


STEERING COLUMN POSITIONS

Description	Degrees	Fore / Aft Position (mm)
Lowermost position No. 1	17.0	
Geometric center position No. 2	19.4	
Uppermost position No. 3	22.2	
Telescoping Steering Wheel Travel		50
Test Position	19.4	25

DATA SHEET NO. 3
DUMMY LONGITUDINAL CLEARANCE DIMENSIONS

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20204215
 Test Date: 4/21/2020

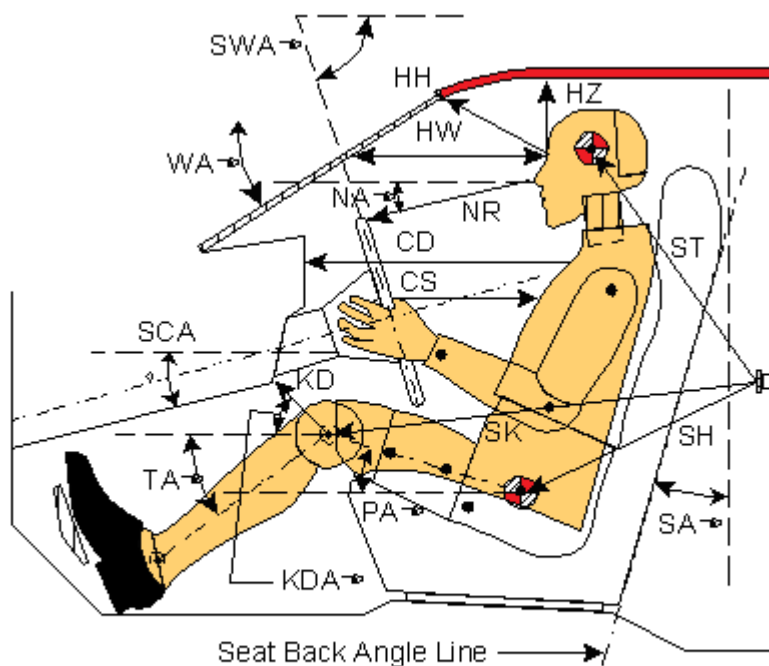


Left Side View

Code	Measurement Description	Driver (SN: 142)		Passenger (SN: 139)	
		Length (mm)	Angle (°)	Length (mm)	Angle (°)
WA°	Windshield Angle		27.1		
SWA°	Steering Wheel Angle		19.6		
SCA°	Steering Column Angle		70.4		
SA°	Seat Back Angle (on headrest post)		2.6		0.7
HZ	Head to Roof (Z)	155	90	182	90
HH	Head to Header	335	23.4	290	42.5
HW	Head to Windshield	608	0	621	0
NR	Nose to Rim / Dash	367	5.8	463	12.8
CD	Chest to Dash	511		416	
CS	Chest to Steering Hub	295	1.9		
RA	Rim to Abdomen	214	0		
KDL	Left Knee to Dash	230	29.9	140	32.5
KDR	Right Knee to Dash	218	28.8	149	33.7
PA°	Pelvic Angle		22.8		20.7
TA°	Tibia Angle		19.3		28.7
SK	Striker to Knee	574	18.7	672	14.7
ST	Striker to Head	383	78.5	378	60.2
SH	Striker to H-Point	332	57.6	423	34.4

DATA SHEET NO. 4
DUMMY LATERAL CLEARANCE DIMENSIONS

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20204215
 Test Date: 4/21/2020

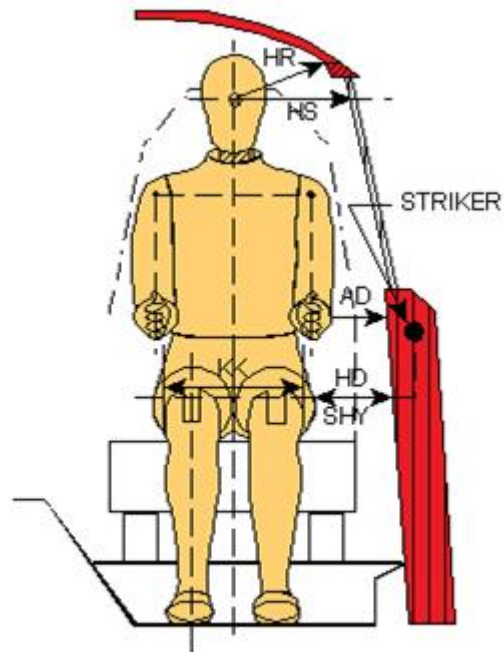


Front View

Code	Description	Driver (mm)	Passenger (mm)
AD	Arm to Door	131	78
HD	H-Point to Door	162	190
HR	Head to Side Header	188	224
HS	Head to Side Window	327	354
KK	Knee to Knee	330	210
SHY	Striker to H-Point (Y Direction)	240	245
AA	Ankle to Ankle	335	168

DATA SHEET NO. 5 SEAT BELT POSITIONING DATA

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20204215
 Test Date: 4/21/2020

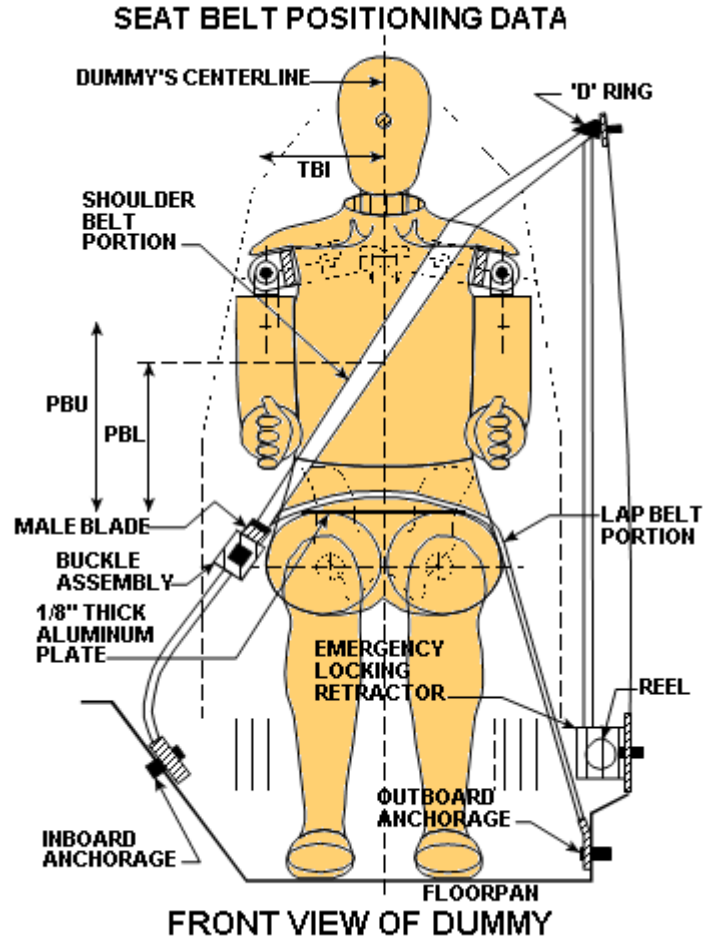

SEAT BELT POSITIONING MEASUREMENTS

Measurement Description	Units	Driver	Passenger
PBU — Top surface of reference to belt upper edge	mm	395	295
PBL — Top surface of reference to belt lower edge	mm	320	220

BELT LENGTH DATA


Measurement Description	Units	Driver	Passenger
Shoulder belt length as measured on ATD	mm	825	890
Lap Belt Length as measured on ATD	mm	585	675
Remainder of belt on reel	mm	990	835
Total belt length for continuous webbing systems	mm	2400	2400

DATA SHEET NO. 6
HIGH-SPEED CAMERA LOCATIONS AND DATA

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20204215
Test Date: 4/21/2020

CAMERA POSITIONS FOR FRONTAL IMPACTS

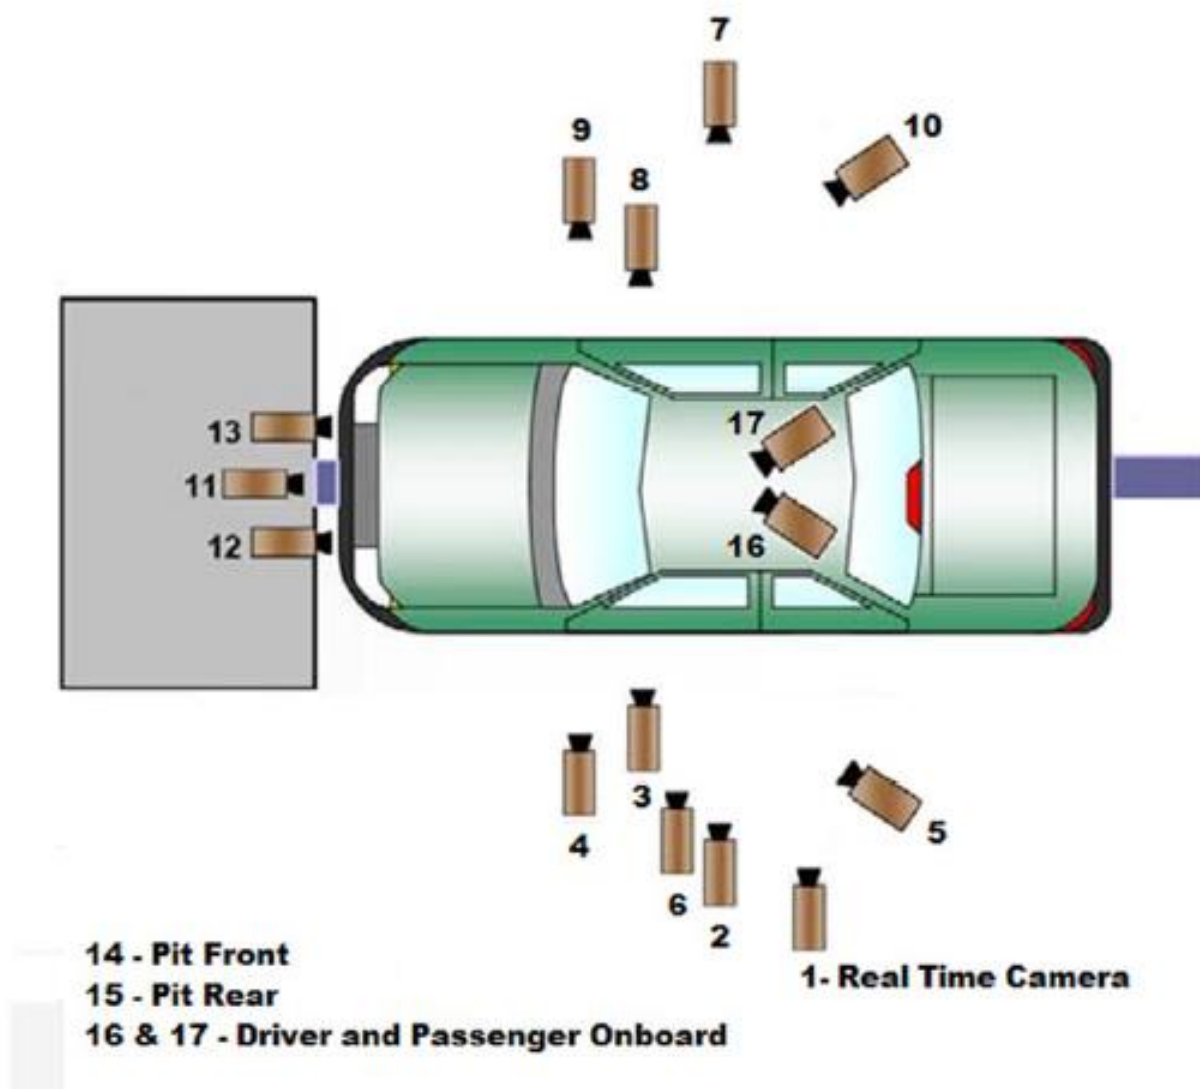

DATA SHEET NO. 6 ... (CONTINUED)
HIGH-SPEED CAMERA LOCATIONS AND DATA

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20204215
 Test Date: 4/21/2020

CAMERA LOCATIONS


No.	Camera View	Location (mm)			Lens (mm)	Speed (fps)
		X	Y	Z		
1	Real-Time Left Overall	-	-	-		60
2	Left Overall	-2216	-7291	-1335	24	1000
3	Driver Close-Up	-1517	-6621	-1430	50	1000
4	Left Front Half	-852	-6178	-1284	28	1000
5	Left Angle	-4804	-5322	-2590	50	1000
6	Steering Column	-1520	-7432	-2153	50	1000
7	Right Overall	-2132	7211	-1286	24	1000
8	Passenger Close-Up	-1490	6931	-1443	50	1000
9	Right Front Half	-1176	6441	-1284	28	1000
10	Right Angle	-4632	4904	-2537	50	1000
11	Windshield	1163	0	-3471	25	1000
12	Driver Windshield	823	-400	-2340	25	1000
13	Passenger Windshield	823	400	-2340	25	1000
14	Pit Front	-1080	0	2247	12.5	1000
15	Pit Rear	-2485	0	2404	12.5	1000
16	Onboard Driver Airbag (Optional)				8	1000
17	Onboard Passenger Airbag (Optional)				8	1000

* COORDINATES: +X = forward of impact plane
 +Y = right of monorail center
 +Z = into ground

DATA SHEET NO. 7 **VEHICLE ACCELEROMETER LOCATIONS**

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20204215
 Test Date: 4/21/2020

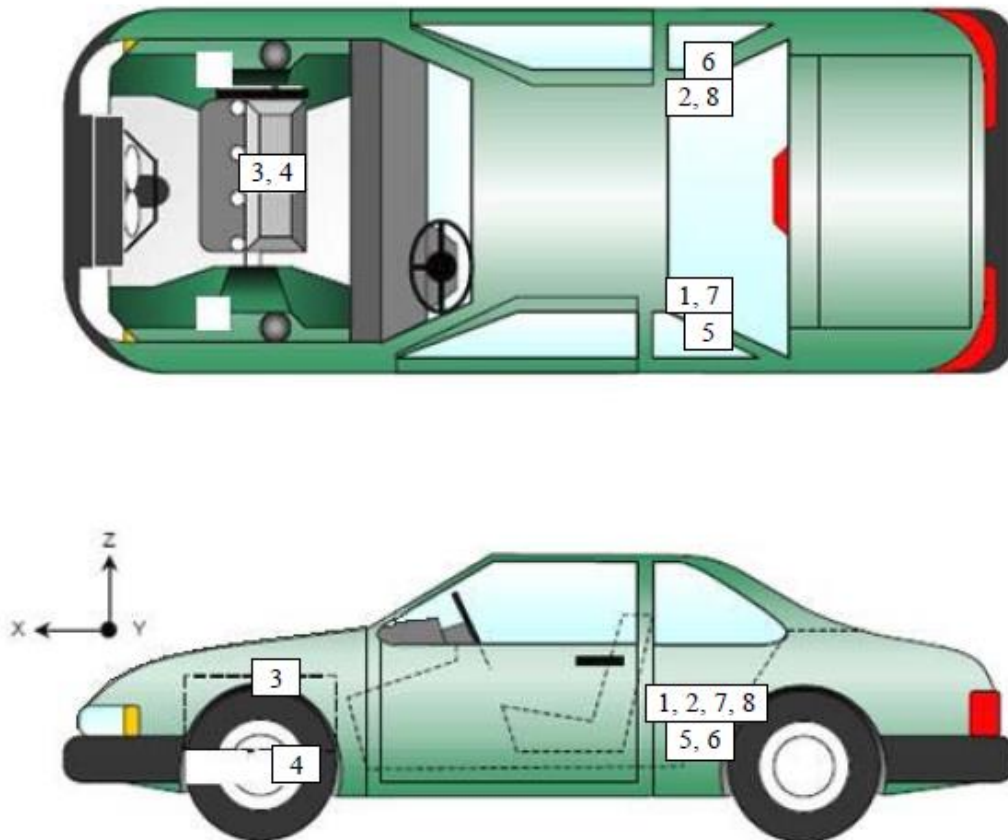

VEHICLE ACCELEROMETER PRE-TEST LOCATIONS

No.	Accelerometer Location	Measurements (mm)		
		X	Y	Z
1	Left Rear Accelerometer – X Direction	1946	-382	118
2	Right Rear Accelerometer – X Direction	1945	329	115
3	Engine Top X	4031	68	-400
4	Engine Bottom X	3927	-20	310
5	Left Rear Accelerometer – Z Direction	1946	-382	118
6	Right Rear Accelerometer – Z Direction	1945	329	115
7	Left Rear Accelerometer – X Direction Redundant	1946	-385	119
8	Right Rear Accelerometer – X Direction Redundant	1945	329	118

Reference Points: *X – Rear Surface of Vehicle (+ forward)*
 Y – Vehicle Centerline (+ to right)
 Z – Ground Plane (+ down)


DATA SHEET NO. 8
PHOTOGRAPHIC REFERENCE TARGET LOCATIONS

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20204215
 Test Date: 4/21/2020

Item	Value
A	378
B	908
C	2491
D	610
E	1729
F	180
G	1847
H	1109
I	1467
J	876
K	878
L	1609
M	1110
N	1612
O	877
P	874
Q	1467

All units in millimeters

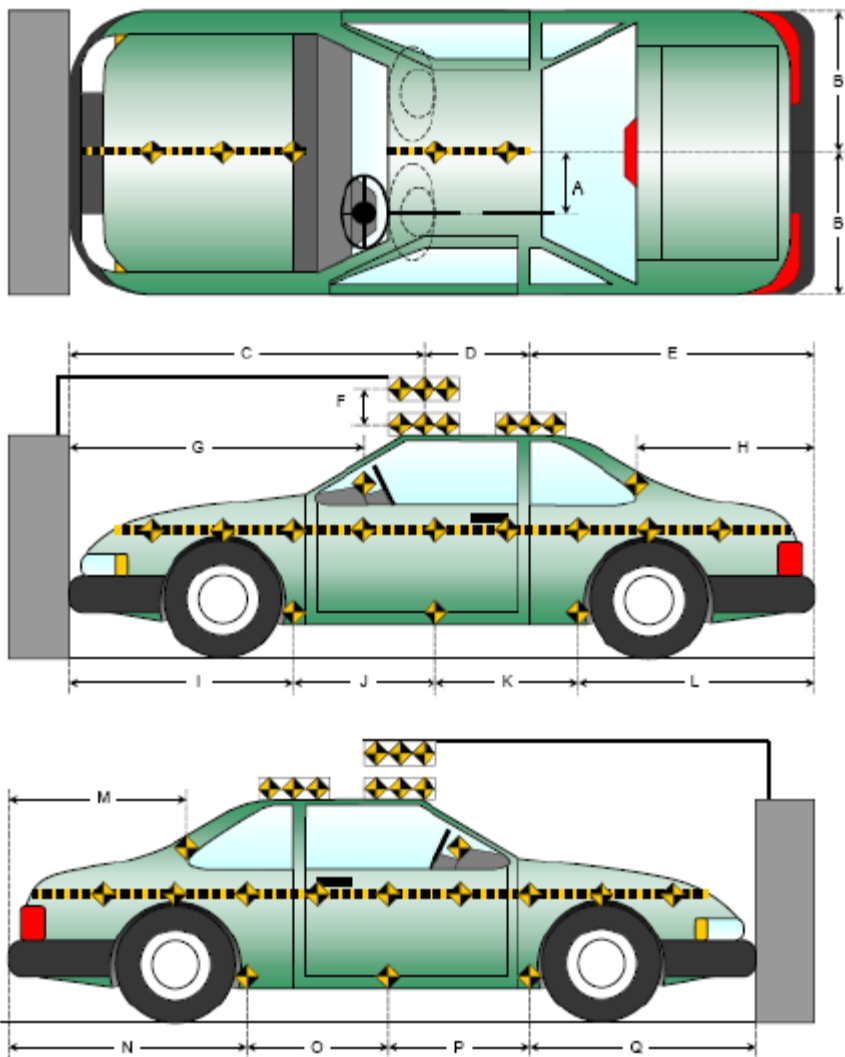

DATA SHEET NO. 9
LOAD CELL LOCATIONS ON FIXED BARRIER

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20204215
Test Date: 4/21/2020

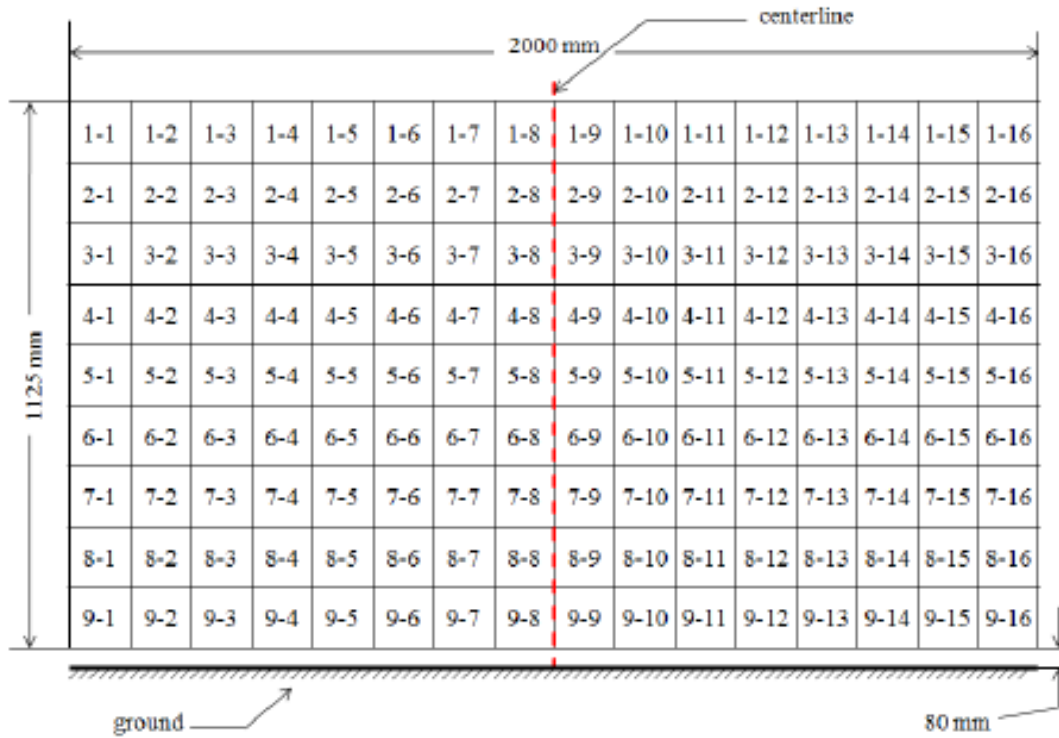


Figure 1 - Load Cell Locations on a 128-Load Cell Barrier with Plywood Height Extension*
Please note above diagram is not actual representation of load cell barrier used.

DATA SHEET NO. 10
TEST VEHICLE SUMMARY OF RESULTS

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20204215
 Test Date: 4/21/2020

INSTRUMENTATION

Instrumentation	Number of Channels Collected
Driver Dummy Accelerometers	47
Passenger Dummy Accelerometers	47
Vehicle Structure Accelerometers	8
Load Cell Barrier	384
Total	486

CAMERA COVERAGE

Type of Camera	Number Used in this Test
High-Speed Vehicle Onboard	2
High-Speed Offboard	14
Real-Time Panning	1
Total	17

**DATA SHEET NO. 11
POST-TEST OBSERVATIONS**

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20204215
Test Date: 4/21/2020

TEST DUMMY INFORMATION AND CONTACT LOCATIONS

Description	Driver	Passenger
Dummy Type / Serial No.	P572E 50 th Male / 142	P5720 5 th Female / 139
Head Contact	Frontal Airbag & Headrest	Frontal Airbag & Headrest
Upper Torso Contact	Frontal Airbag	Frontal Airbag
Lower Torso Contact	None	None
Left Knee Contact	Knee Airbag	None
Right Knee Contact	Knee Airbag	None

DOOR OPENING AND SEAT TRACK INFORMATION

Description	Driver	Passenger	Other
Locked / Unlocked Doors	Unlocked	Unlocked	
Front Door Opening	Closed & Operational	Closed & Operational	
Rear Door Opening	Closed & Operational	Closed & Operational	
Trunk/Hatch/Tailgate Opening			Operational
Seat Track Shift (mm)	0	0	
Seat Back Movement from Initial Position	No	No	

POST-TEST STRUCTURAL OBSERVATIONS

Critical Areas of Performance	Observations and Conclusions
Windshield Damage	Minor cracks along passenger side
Window Damage	None
Other	None

VEHICLE REBOUND FROM BARRIER

Measured Parameter	Units	Value
Left Side	mm	1005
Center	mm	980
Right Side	mm	1017
Average	mm	1001


SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION

Restraint Type	Driver		Passenger	
	Installed	Deployed	Installed	Deployed
Front Airbag	Yes	Yes	Yes	Yes
Side Airbag 1 - Curtain	Yes	No	Yes	No
Side Airbag 2 - Torso/Pelvis Airbag	Yes	No	Yes	No
Knee Airbag	Yes	Yes	No	N/A
Seat Belt Pretensioner	Yes	Yes	Yes	Yes
Seat Belt Load Limiter	Yes	Yes	Yes	Yes
Other				

DATA SHEET NO. 12
VEHICLE PROFILE MEASUREMENTS

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20204215
 Test Date: 4/21/2020

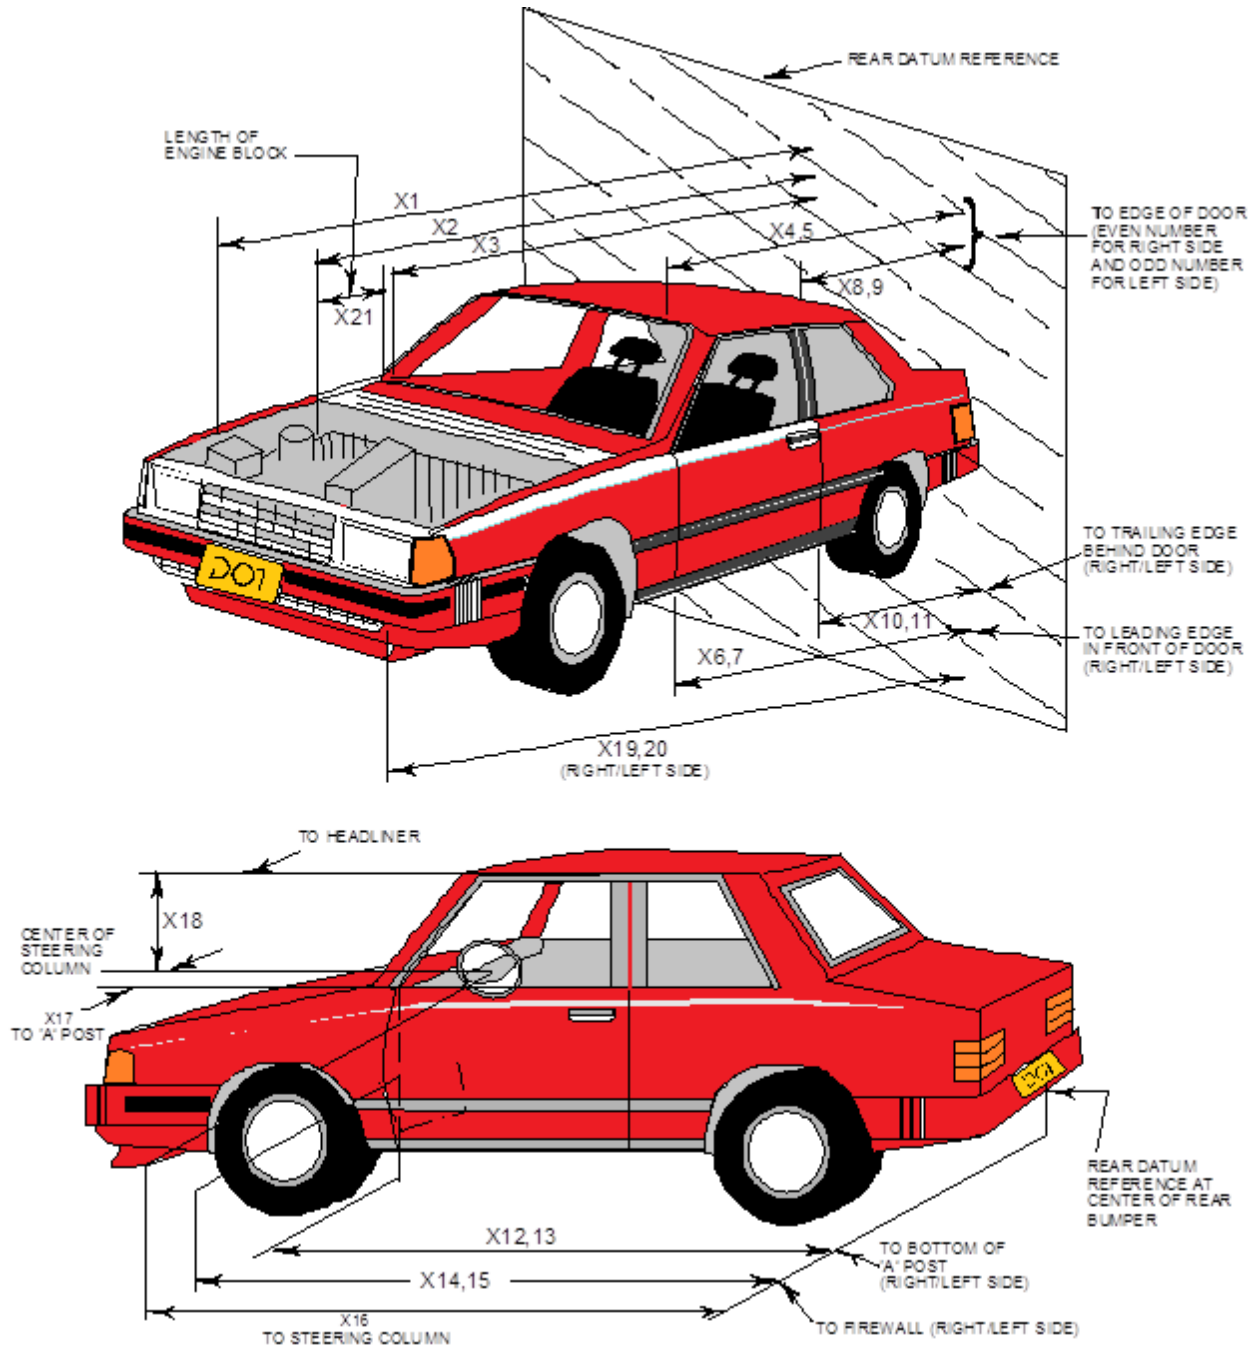

DATA SHEET NO. 12 ... (CONTINUED)
VEHICLE PROFILE MEASUREMENTS

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20204215
 Test Date: 4/21/2020

No.	Measurement Description	Pre-Test	Post-Test	Difference
1	Total Length of Vehicle at Centerline	4830	4290	-540
2	Rear Surface of Vehicle (RSOV) to Front of Engine	4179	4098	-81
3	RSOV to Firewall	3672	3668	-4
4	RSOV to Upper Leading Edge of Right Door	3217	3217	0
5	RSOV to Upper Leading Edge of Left Door	3215	3214	-1
6	RSOV to Lower Leading Edge of Right Door	3310	3307	-3
7	RSOV to Lower Leading Edge of Left Door	3309	3305	-4
8	RSOV to Upper Trailing Edge of Right Door	2199	2200	1
9	RSOV to Upper Trailing Edge of Left Door	2198	2198	0
10	RSOV to Lower Trailing Edge of Right Door	2239	2239	0
11	RSOV to Lower Trailing Edge of Left Door	2238	2239	1
12	RSOV to Bottom of "A" Post of Right Side	3270	3269	-1
13	RSOV to Bottom of "A" Post of Left Side	3267	3265	-2
14	RSOV to Firewall, Right Side	3674	3676	2
15	RSOV to Firewall, Left Side	3677	3677	0
16	RSOV to Steering Column	2790	2826	36
17	Center of Steering Column to "A" Post	272	274	2
18	Center of Steering Column to Headliner	370	462	92
19	RSOV to Right Side of Front Bumper	4779	4246	-533
20	RSOV to Left Side of Front Bumper	4778	4257	-521
21	Length of Engine Block	412	412	0
RD	RSOV to Right Side of Dash Panel	2992	2991	-1
CD	RSOV to Center of Dash Panel	2934	2932	-2
LD	RSOV to Left Side of Dash Panel	3000	3001	1

All Dimensions in mm

DATA SHEET NO. 13
ACCIDENT INVESTIGATION DIVISION DATA

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20204215
Test Date: 4/21/2020


VEHICLE INFORMATION

VIN: KNAE15LA7L6074115
Vehicle Size Category: Passenger Car

Wheelbase (mm): 2907
Test Weight (kg): 1,977

ACCELEROMETER DATA

Accelerometer Locations: Please See Data Sheet No. 7
Cal. Procedure / Interval: Calspan Procedure / 6 month
Integration Algorithm: Trapezoidal
Linearity: > 99%
Impact Velocity (km/h): 56.26
Velocity Change (km/h): 65.55
Time of Separation (ms): 131

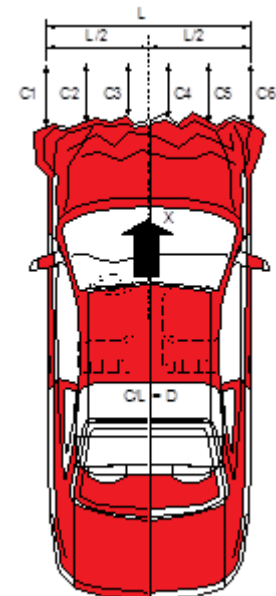

CRUSH PROFILE

Collision Deformation Classification: 12FDEW3
Midpoint of Damage: C3
Damage Region Length (mm): 1436
Impact Mode: Frontal

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
C1	Crush Zone 1 at Left Side	mm	4584	4196	388
C2	Crush Zone 2 at Left Side	mm	4777	4247	530
C3	Crush Zone 3 at Left Side	mm	4825	4242	583
C4	Crush Zone 4 at Right Side	mm	4825	4245	580
C5	Crush Zone 5 at Right Side	mm	4780	4247	533
C6	Crush Zone 6 at Right Side	mm	4586	4245	341
L	C1 to C6	mm	1436	1280	156

DATA SHEET NO. 14
VEHICLE INTRUSION MEASUREMENTS

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
Test Program: NCAP Frontal Barrier Impact Test


NHTSA No.: M20204215
Test Date: 4/21/2020

DOOR OPENING WIDTH

Item	Description	Units	Pre-Test	Post-Test	Difference
A	Left Side Upper	mm	972	971	-1
B	Left Side Lower	mm	902	901	-1
D	Right Side Upper	mm	972	973	1
E	Right Side Lower	mm	904	904	0

WHEELBASE MEASUREMENTS

Item	Description	Units	Pre-Test	Post-Test	Difference
C	Left Side Wheelbase	mm	2907	2843	-64
F	Right Side Wheelbase	mm	2907	2856	-51

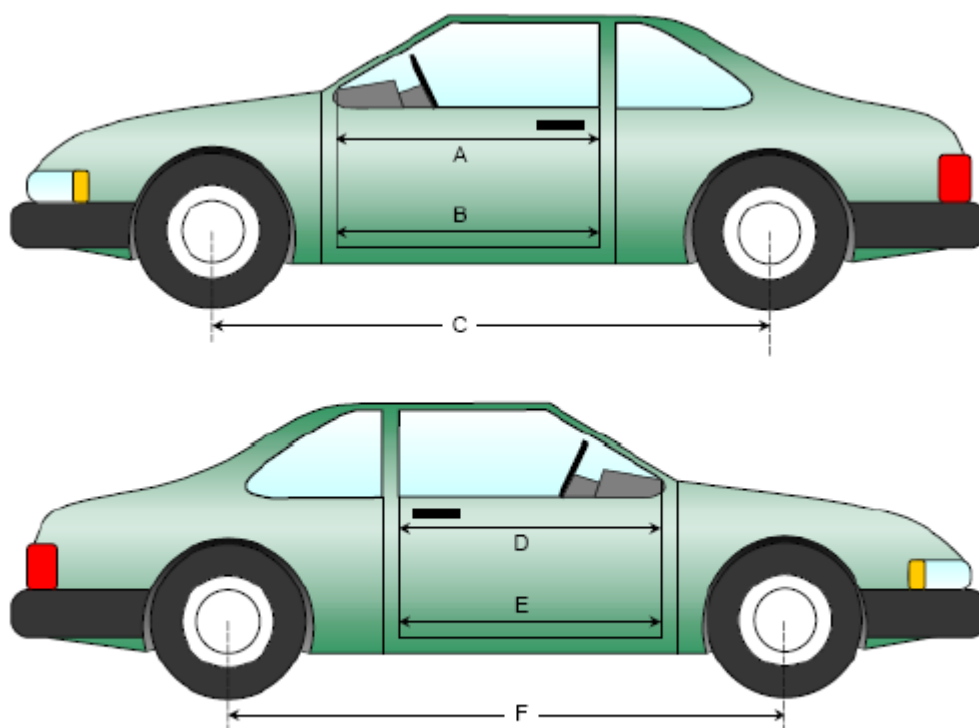

Left & Right Side Views

DATA SHEET NO.14 ... (CONTINUED)
VEHICLE INTRUSION MEASUREMENTS


Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20204215
 Test Date: 4/21/2020

DRIVER COMPARTMENT INTRUSION

Item	Description	Units	Pre-Test	Post-Test	Difference
AB	Door Opening (Inside Window Jam)	mm	717	715	-2
CX	Left Knee Bolster to X	mm	288	286	-2
DX	Right Knee Bolster to X	mm	272	270	-2
EX	Brake Pedal to X	mm	593	579	-14
FX	Foot Rest to X	mm	610	608	-2
GX	Center of Steering Column Wheel Hub to X	mm	39	77	38

X = Front of Seat Track (Stationary)

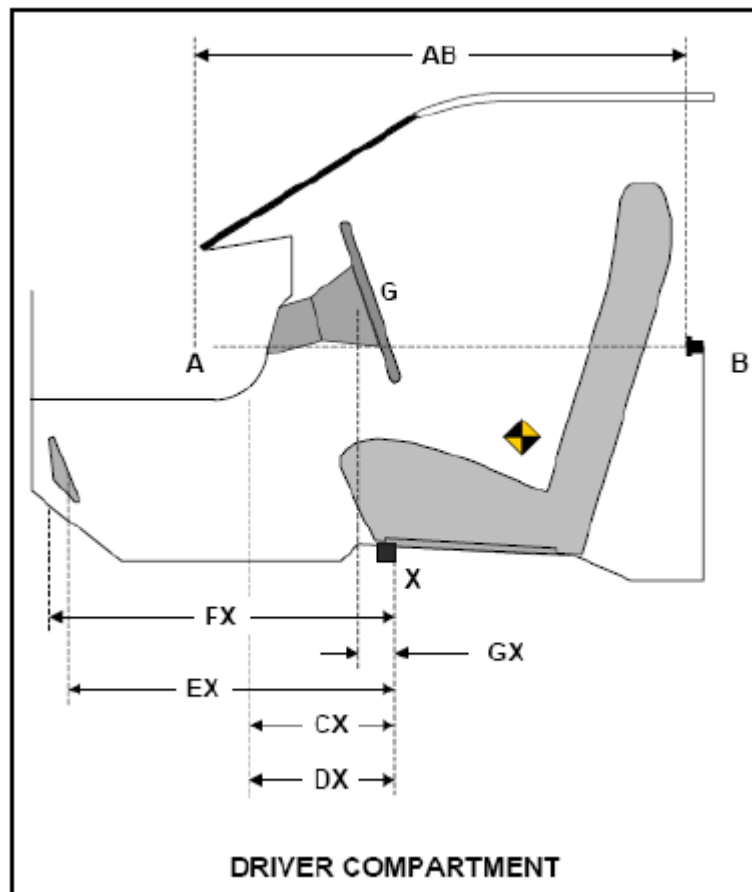

DATA SHEET NO. 15
SUMMARY OF FMVSS 212, 219 (PARTIAL), AND 301 DATA

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20204215
 Test Date: 4/21/2020


Windshield Mounting Details: A 0.8 mm trim surrounds the top and side of windshield while a plastic shroud is on the bottom.

The standard requires that the post-test retention measurement be a minimum of 75% of the pre-test total periphery measurement for vehicles not equipped with occupant passive restraints and 50% for each side of the windshield for vehicles which are equipped with occupant passive restraints.

Temperature of windshield molding during test: 21° C

WINDSHIELD PERIPHERY MEASUREMENTS

Measurement	Pre-Test (mm)	Post-Test (mm)	% Retention
Left Side	2186.5	2186.5	100
Right Side	2186.5	2186.5	100
Total	4373	4373	100

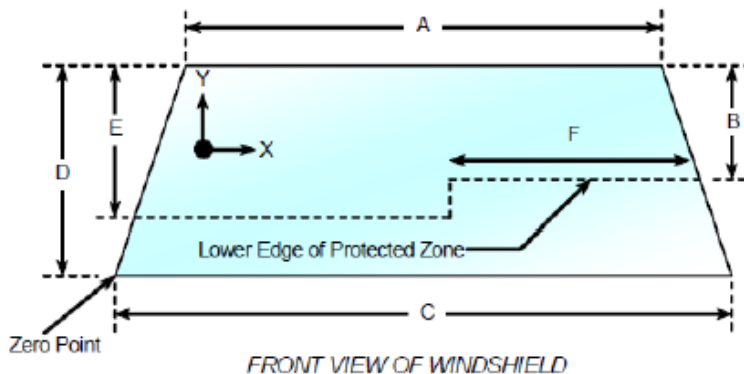

Item	Units	Value
A	mm	1233
B	mm	458
C	mm	1500
D	mm	820
E	mm	491
F	mm	545

AREAS OF PROTECTED ZONE FAILURES

A. *Provide coordinates of the area that the protected zone was penetrated more than .25 inches by a vehicle component other than one that is normally in contact with the windshield.*

- No Penetration

X	Y

B. *Provide coordinates of the area beneath the protected zone that the inner surface of the windshield was penetrated by a vehicle component.*

- No Penetration

X	Y

DATA SHEET NO. 15 ... (CONTINUED)
SUMMARY OF FMVSS 212, 219 (PARTIAL), AND 301 DATA

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20204215
Test Date: 4/21/2020

FMVSS 301 FUEL SYSTEM INTEGRITY POST IMPACT DATA

Temperature at Time of Impact: 21 ° C

Test Time: 10:00 AM


STODDARD SOLVENT SPILLAGE MEASUREMENTS

- A. From impact until vehicle motion ceases: 0 oz.
(Maximum allowable is 1 oz.)
- B. For the 5-minute period after motion ceases: 0 oz.
(Maximum allowable is 5 oz.)
- C. For the following 25 minutes: 0 oz.
(Maximum allowable is 1 oz./minute)
- D. Spillage: No Spillage Occurred

DATA SHEET NO. 16
FMVSS 301 STATIC ROLLOVER RESULTS

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20204215
 Test Date: 4/21/2020

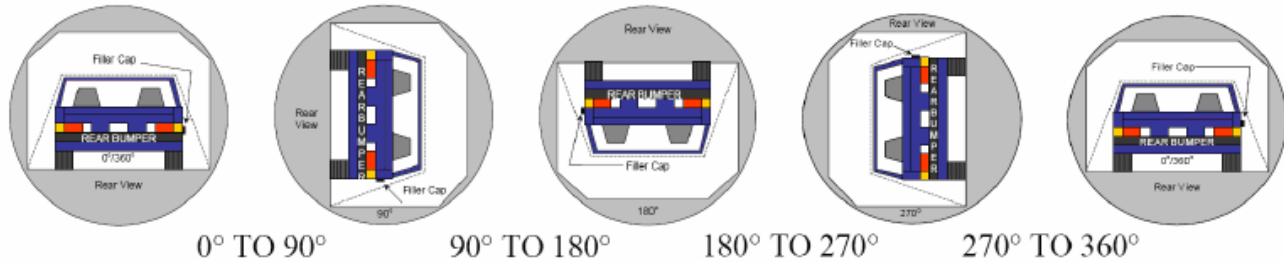

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.
2. The position hold time at each position is 300 seconds (minimum).
3. Details of Stoddard Solvent Spillage: No Spillage Occurred

SOLVENT COLLECTION TIME TABLE IN SECONDS

Test Phase	Rotation Time	Hold Time	Total Time
0° to 90°	69	300	369
90° to 180°	65	300	365
180° to 270°	63	300	363
270° to 360°	65	300	365

FMVSS 301 SPILLAGE TABLE

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° to 90°	0	0	0	
90° to 180°	0	0	0	
180° to 270°	0	0	0	
270° to 360°	0	0	0	


SOLVENT SPILLAGE LOCATION TABLE

Test Phase	Spillage Location
0° to 90°	None
90° to 180°	None
180° to 270°	None
270° to 360°	None

DATA SHEET NO. 17
DUMMY / VEHICLE TEMPERATURE STABILIZATION CHART

Test Vehicle: 2020 KIA Stinger GT-Line four door sedan
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20204215
 Test Date: 4/21/2020

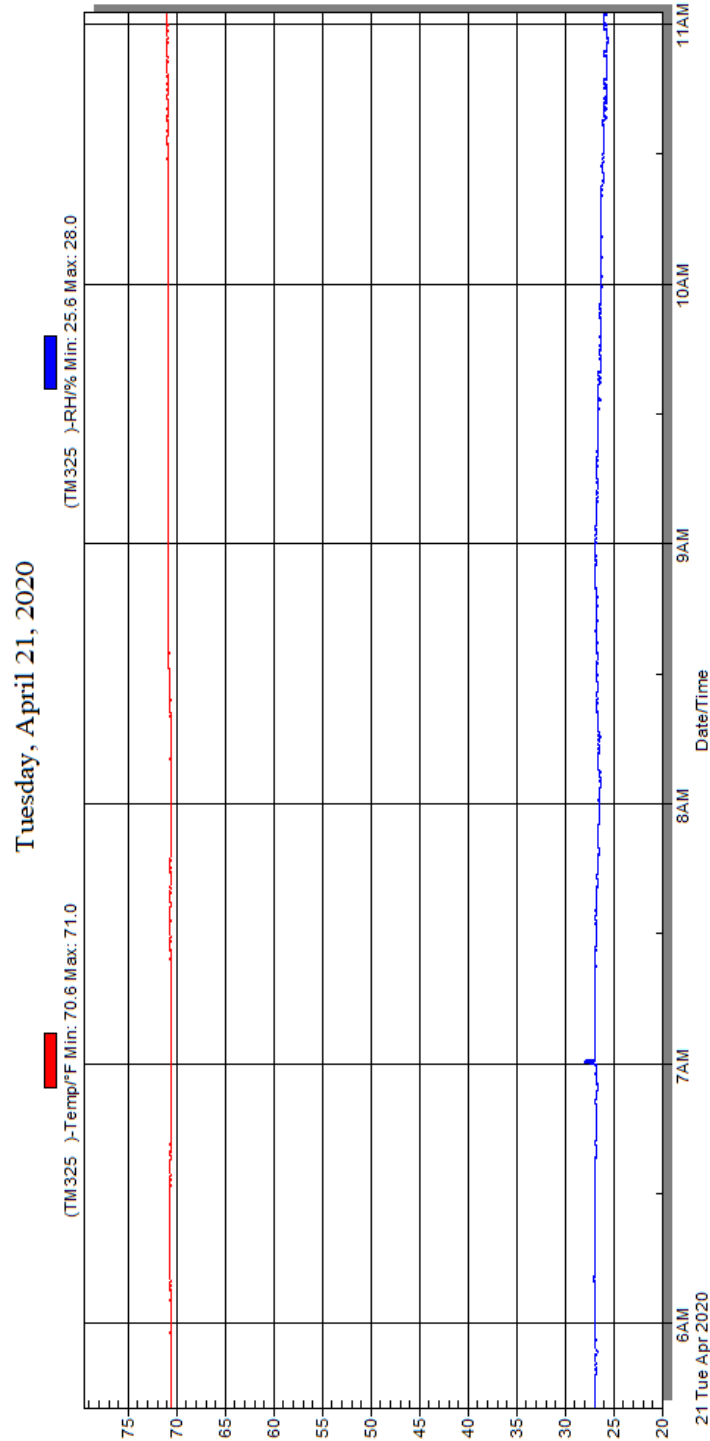

Temperature and Humidity Stabilization Chart/Data for Dummies and Test Vehicle

APPENDIX A
PHOTOGRAPHS

TABLE OF PHOTOGRAPHS

Fig.	Description	Page
1	Load Cell Location	A-5
2	Pre-Test Load Cell Wall	A-5
3	Post-Test Load Cell Wall	A-6
4	Manufacturer's Label	A-6
5	Tire Placard	A-7
6	2020 KIA Stinger Frontal As Delivered	A-7
7	Left Rear 3-4 View, as Received	A-8
8	Pre-Test Front View of Test Vehicle	A-8
9	Post-Test Front View of Test Vehicle	A-9
10	Pre-Test Left View of Test Vehicle	A-9
11	Post-Test Left View of Test Vehicle	A-10
12	Pre-Test Right View of Test Vehicle	A-10
13	Post-Test Right View of Test Vehicle	A-11
14	Pre-Test Right Front 3-4 View	A-11
15	Post-Test Right Front 3-4 View	A-12
16	Pre-Test Left Rear 3-4 View	A-12
17	Post-Test Left Rear 3-4 View	A-13
18	Pre-Test Windshield View	A-13
19	Post-Test Windshield View	A-14
20	Pre-Test Engine Compartment View	A-14
21	Post-Test Engine Compartment View	A-15
22	Pre-Test Fuel Filler Cap View	A-15
23	Post-Test Fuel Filler Cap View	A-16
24	Pre-Test Front Underbody View ¹	A-16
25	Post-Test Front Underbody View ¹	A-17
26	Pre-Test Rear Underbody View ¹	A-17
27	Post-Test Rear Underbody View ¹	A-18
28	Pre-Test Dummy Cable Routing	A-18
29	Post-Test Dummy Cable Routing	A-19
30	Pre-Test Driver Dummy Front View	A-19
31	Post-Test Driver Dummy Front View	A-20
32	Pre-Test Driver Dummy Window View	A-20
33	Post-Test Driver Dummy Window View	A-21
34	Pre-Test Driver Dummy and Vehicle Interior View	A-21
35	Post-Test Driver Dummy and Vehicle Interior View	A-22

Fig.	Description	Page
36	Pre-Test Driver's Seat Fore-Aft Markings	A-22
37	Post-Test Driver's Seat Fore-Aft Markings	A-23
38	Pre-Test View of Belt Anchorage for Driver Dummy	A-23
39	Post-Test View of Belt Anchorage for Driver Dummy	A-24
40	Pre-Test View of Belt Buckle and Latch Plate for Driver Dummy	A-24
41	Post-Test View of Belt Buckle and Latch Plate for Driver Dummy	A-25
42	Pre-Test Driver Dummy Feet	A-25
43	Post-Test Driver Dummy Feet	A-26
44	Pre-Test Driver's Side Knee Bolster	A-26
45	Post-Test Driver's Side Knee Bolster	A-27
46	Pre-Test Driver's Side Floorpan	A-27
47	Post-Test Driver's Side Floorpan	A-28
48	Post-Test Driver Dummy Face	A-28
49	Post-Test Driver Dummy Contact With Airbag	A-29
50	Post-Test Driver Dummy Contact With Headrest	A-29
51	Pre-Test View of the Steering Wheel	A-30
52	Post-Test View of the Steering Wheel	A-30
53	Pre-Test Passenger Dummy Front View	A-31
54	Post-Test Passenger Dummy Front View	A-31
55	Pre-Test Passenger Dummy Window View	A-32
56	Post-Test Passenger Dummy Window View	A-32
57	Pre-Test Passenger Dummy and Vehicle Interior View	A-33
58	Post-Test Passenger Dummy and Vehicle Interior View	A-33
59	Pre-Test Passenger's Seat Fore-Aft Markings	A-34
60	Post-Test Passenger's Seat Fore-Aft Markings	A-34
61	Pre-Test View of Belt Anchorage for Passenger Dummy	A-35
62	Post-Test View of Belt Anchorage for Passenger Dummy	A-35
63	Pre-Test View of Belt Buckle and Latch Plate for Passenger Dummy	A-36
64	Post-Test View of Belt Buckle and Latch Plate for Passenger Dummy	A-36
65	Pre-Test Passenger Dummy Feet	A-37
66	Post-Test Passenger Dummy Feet	A-37
67	Pre-Test Passenger's Side Knee Bolster	A-38
68	Post-Test Passenger's Side Knee Bolster	A-38
69	Pre-Test Passenger's Side Floorpan	A-39
70	Post-Test Passenger's Side Floorpan	A-39
71	Post-Test Passenger Dummy Face	A-40

Fig.	Description	Page
72	Post-Test Passenger Dummy Contact With Airbag	A-40
73	Post-Test Passenger Dummy Contact With Headrest	A-41
74	Photograph of Ballast Installed in Vehicle	A-41
75	Post-Test Stoddard Solvent Spillage Location View, if Required	A-42
76	Post-Test Speed Trap Read-Out	A-42
77	Vehicle at 0° on Static Rollover Device	A-43
78	Vehicle at 90° on Static Rollover Device	A-43
79	Vehicle at 180° on Static Rollover Device	A-44
80	Vehicle at 270° on Static Rollover Device	A-44
81	Vehicle at 360° on Static Rollover Device	A-45
82	2020 KIA Stinger Frontal Impact Event	A-45
83	Monroney Label Photograph	A-46

¹**NOTE:** *The underbody views should include the following vehicle components: fuel pump, fuel lines, sender unit, fuel tank filler pipe and any other visible system components.*

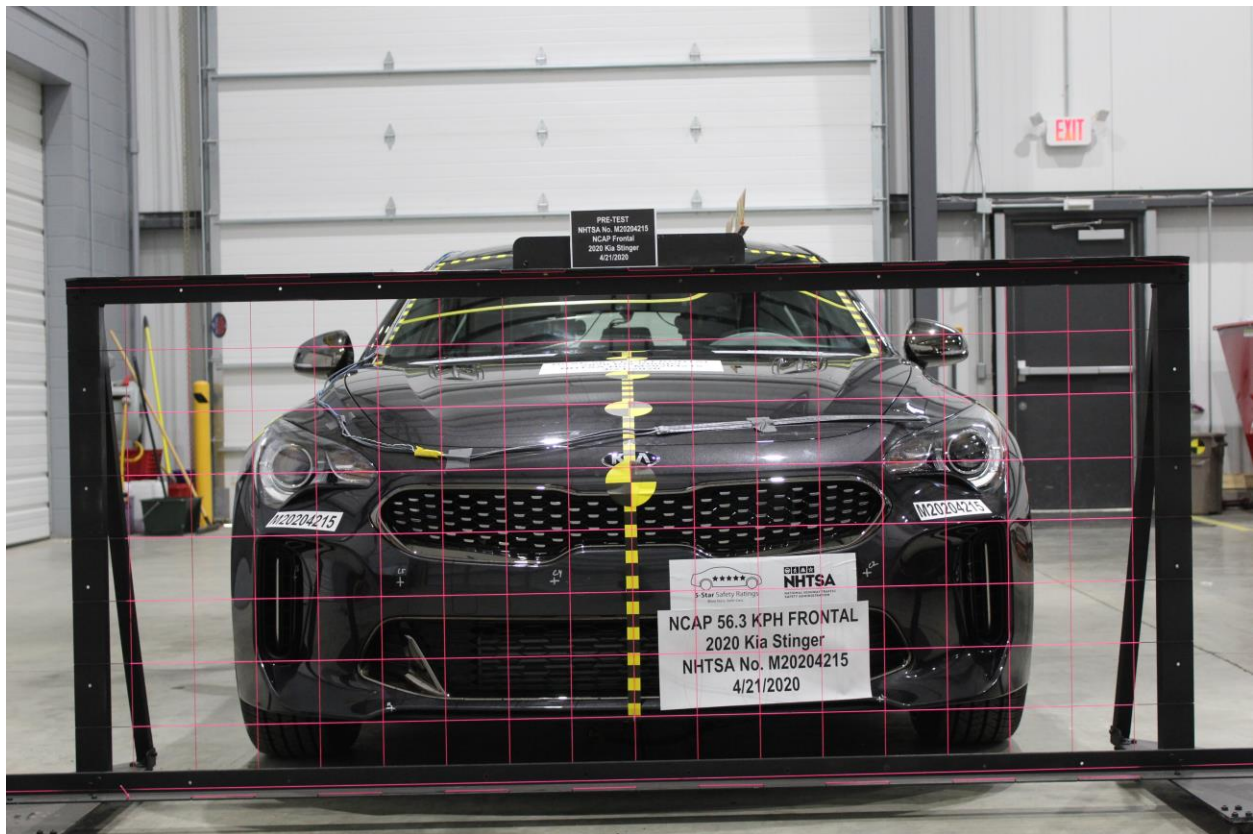


Figure A-1: Load Cell Location



Figure A-2: Pre-Test Load Cell Wall



Figure A-3: Post-Test Load Cell Wall



Figure A-4: Manufacturer's Label



Figure A-5: Tire Placard



Figure A-6: 2020 KIA Stinger Frontal As Delivered



M20204215

Figure A-7: Left Rear 3-4 View, As Received

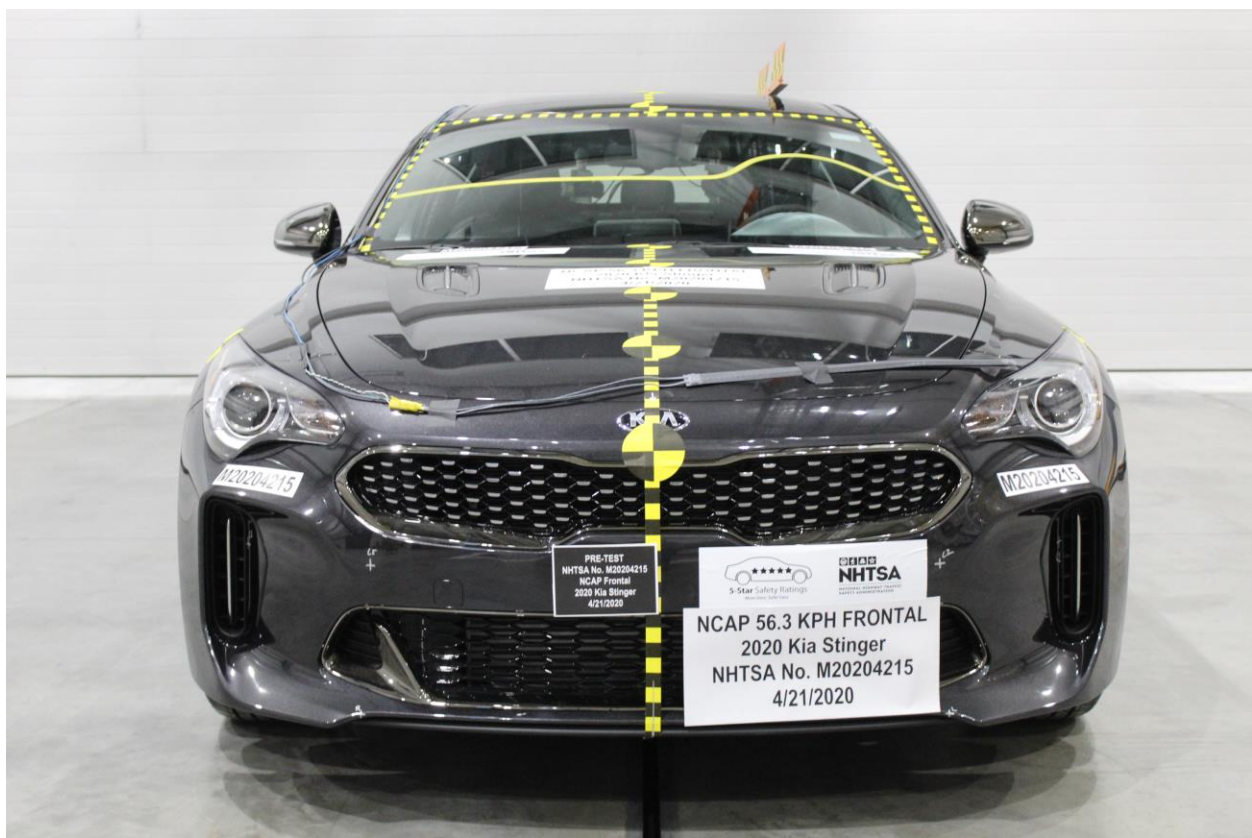


Figure A-8: Pre-Test Front View of Test Vehicle

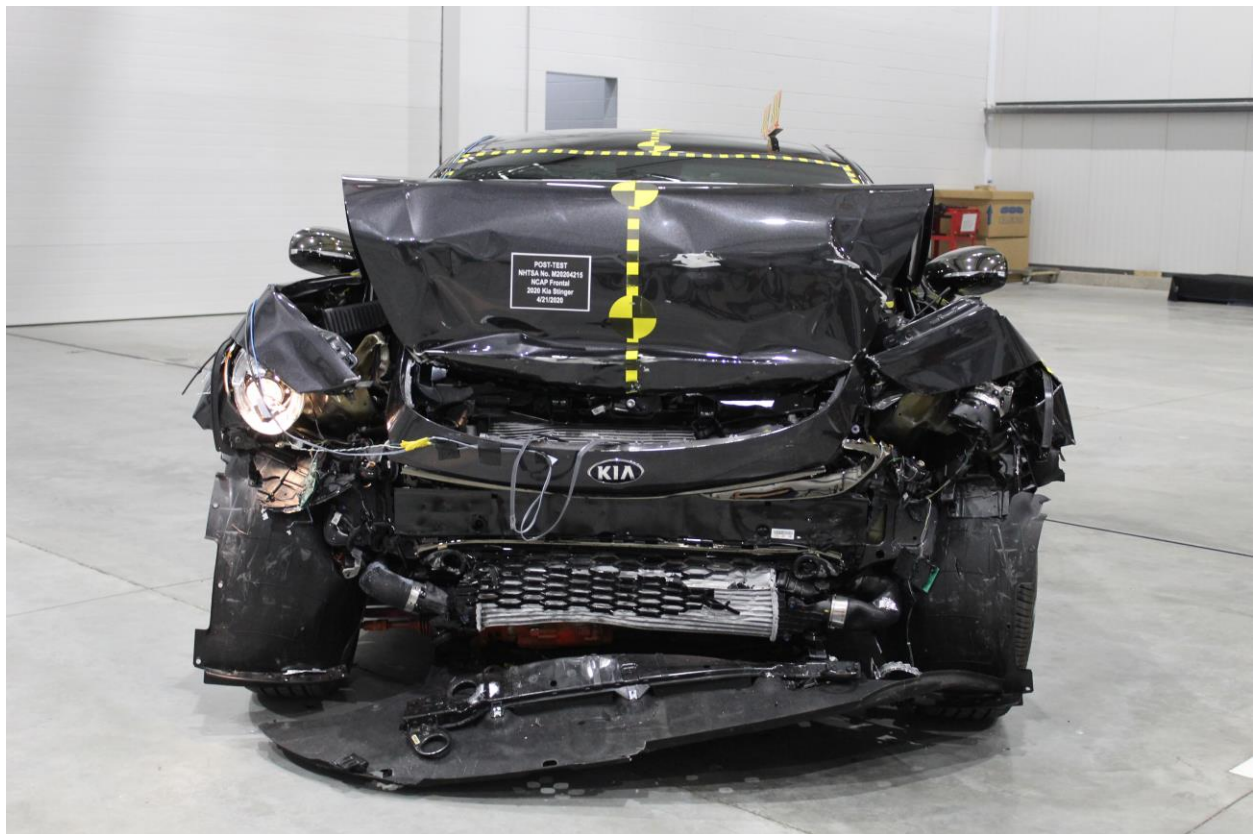


Figure A-9: Post-Test Front View of Test Vehicle



Figure A-10: Pre-Test Left View of Test Vehicle

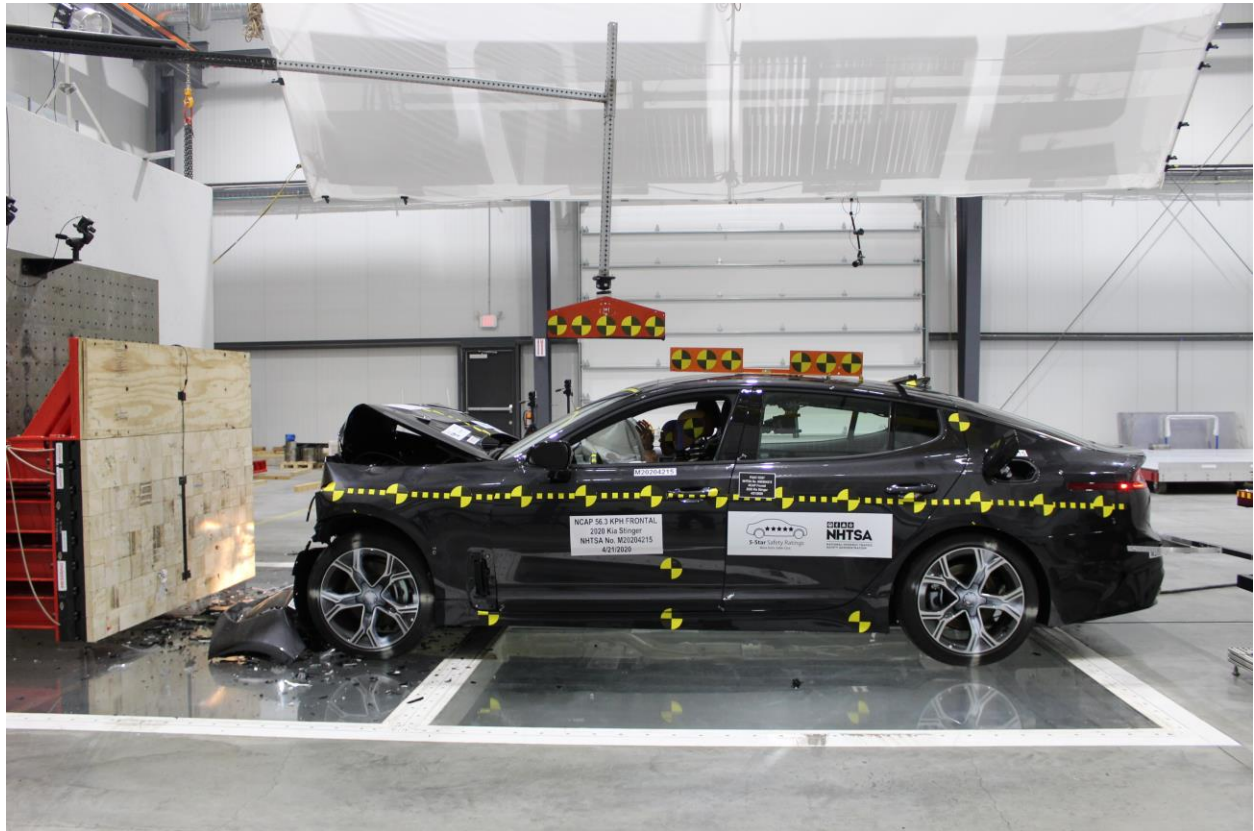


Figure A-11: Post-Test Left View of Test Vehicle



Figure A-12: Pre-Test Right View of Test Vehicle



Figure A-13: Post-Test Right View of Test Vehicle



Figure A-14: Pre-Test Right Front 3-4 View



Figure A-15: Post-Test Right Front 3-4 View



Figure A-16: Pre-Test Left Rear 3-4 View



Figure A-17: Post-Test Left Rear 3-4 View



Figure A-18: Pre-Test Windshield View



Figure A-19: Post-Test Windshield View



Figure A-20: Pre-Test Engine Compartment View

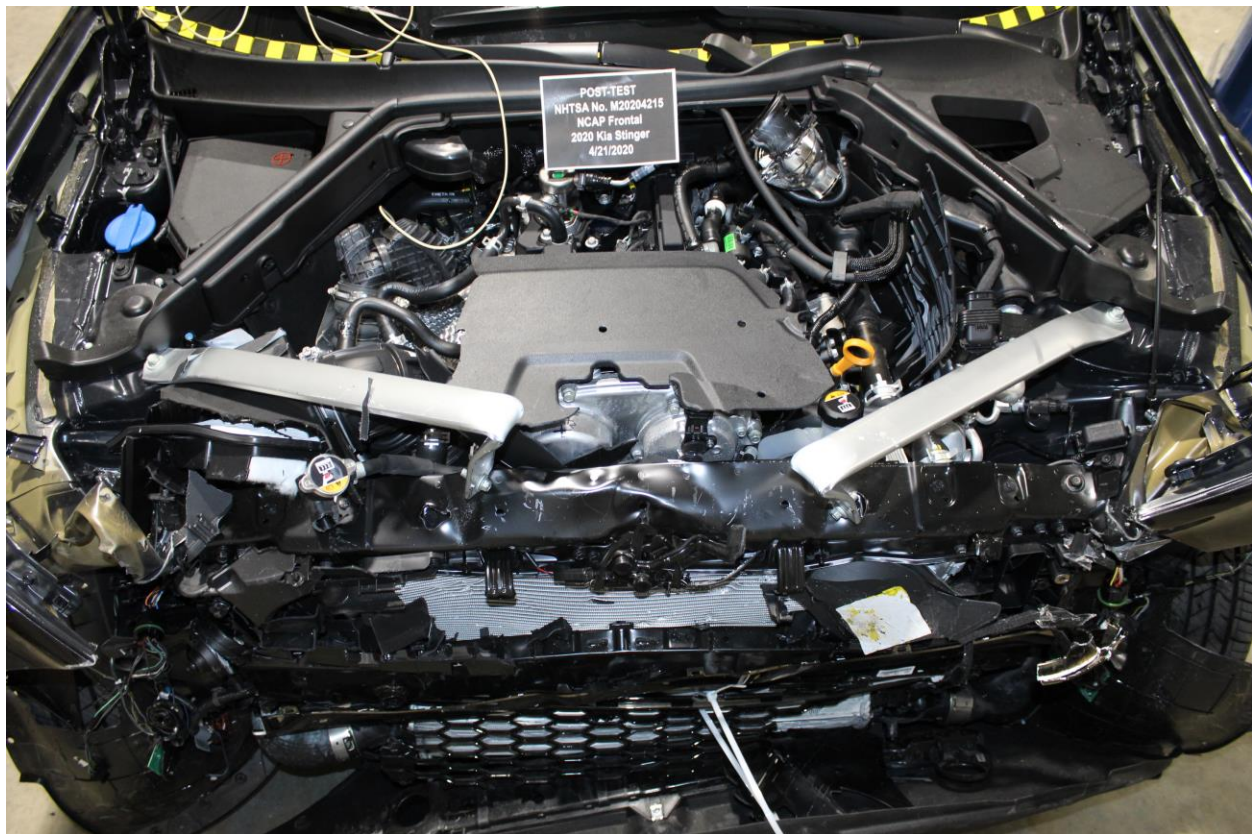


Figure A-21: Post-Test Engine Compartment View



Figure A-22: Pre-Test Fuel Filler Cap View



Figure A-23: Post-Test Fuel Filler Cap View

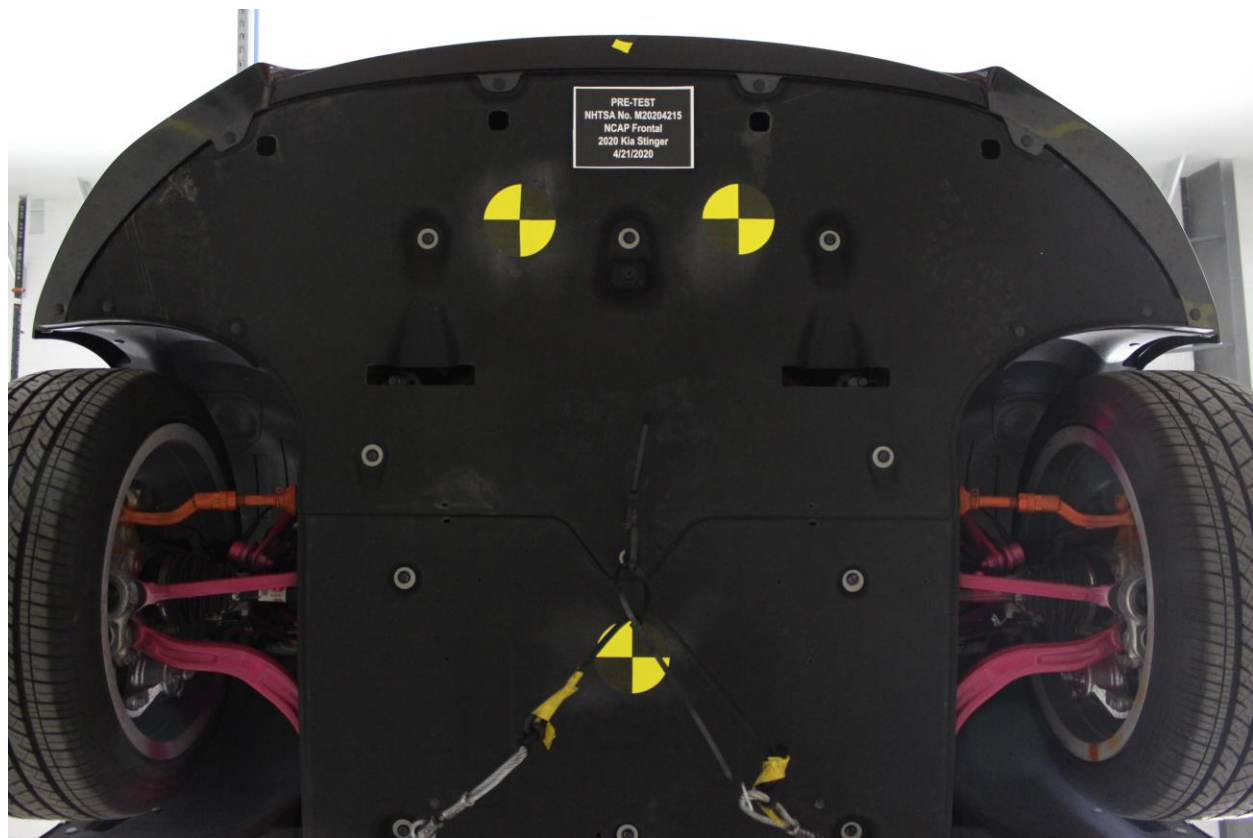


Figure A-24: Pre-Test Front Underbody View

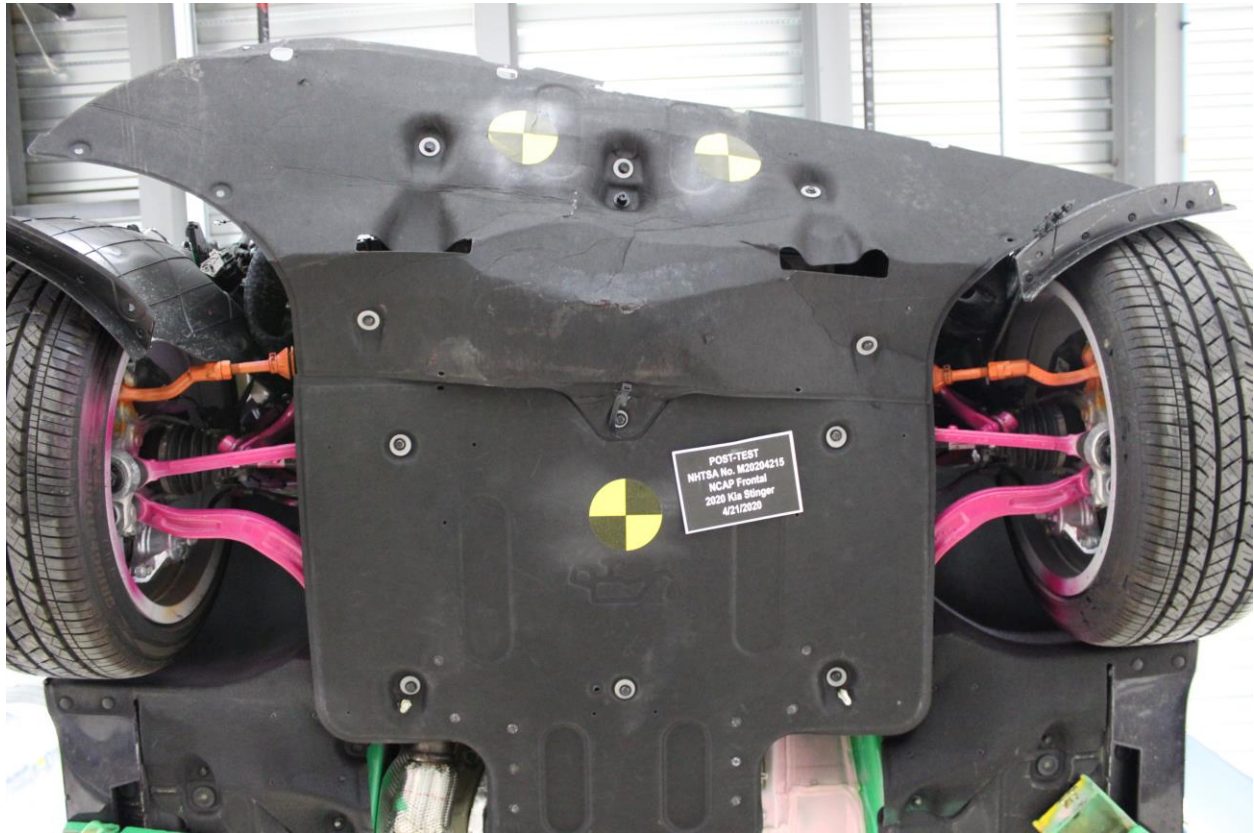


Figure A-25: Post-Test Front Underbody View

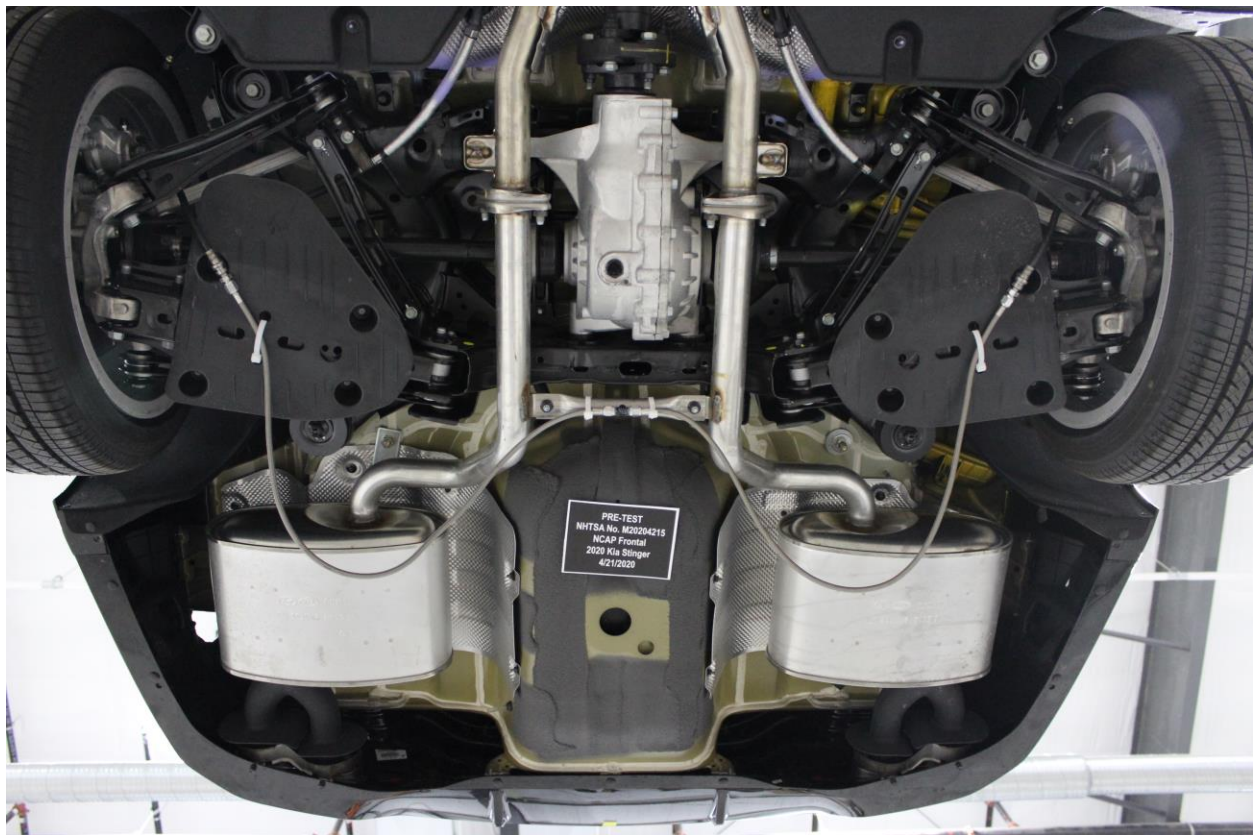


Figure A-26: Pre-Test Rear Underbody View

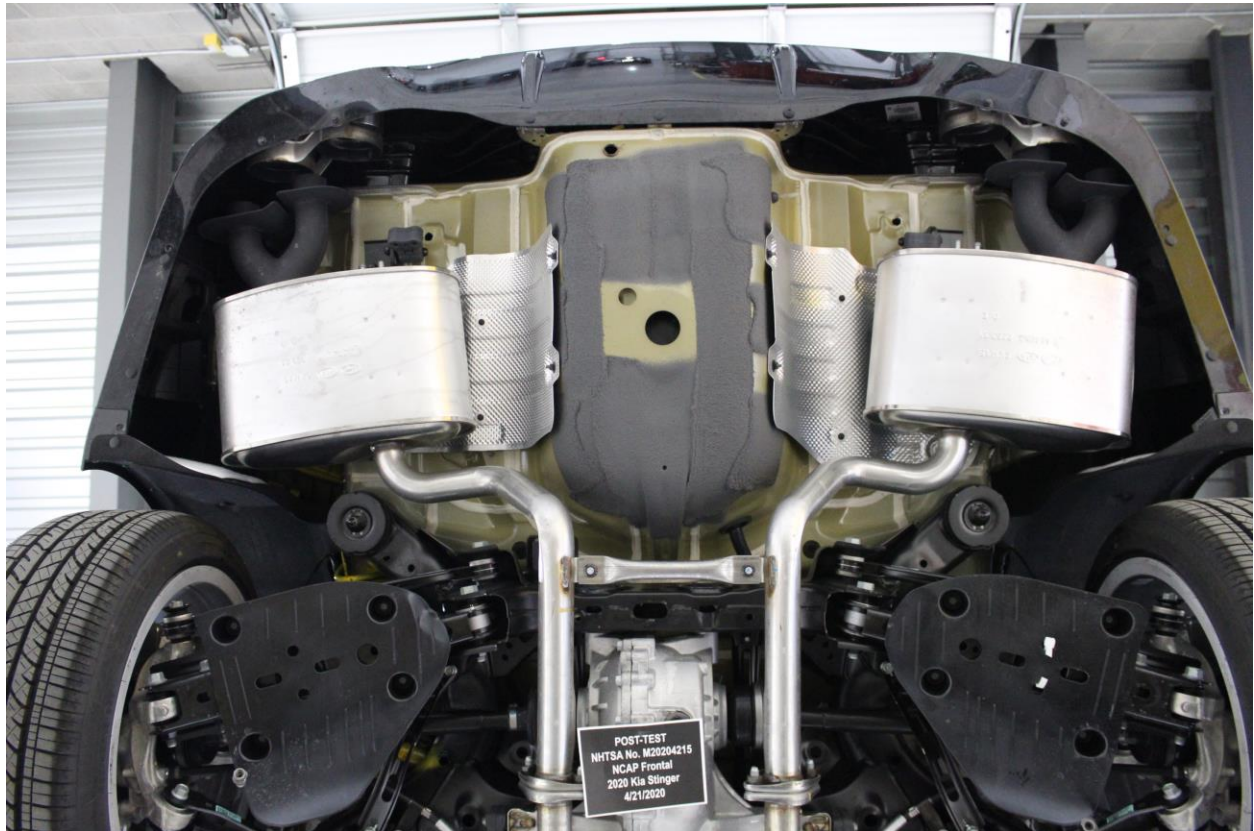


Figure A-27: Post-Test Rear Underbody View

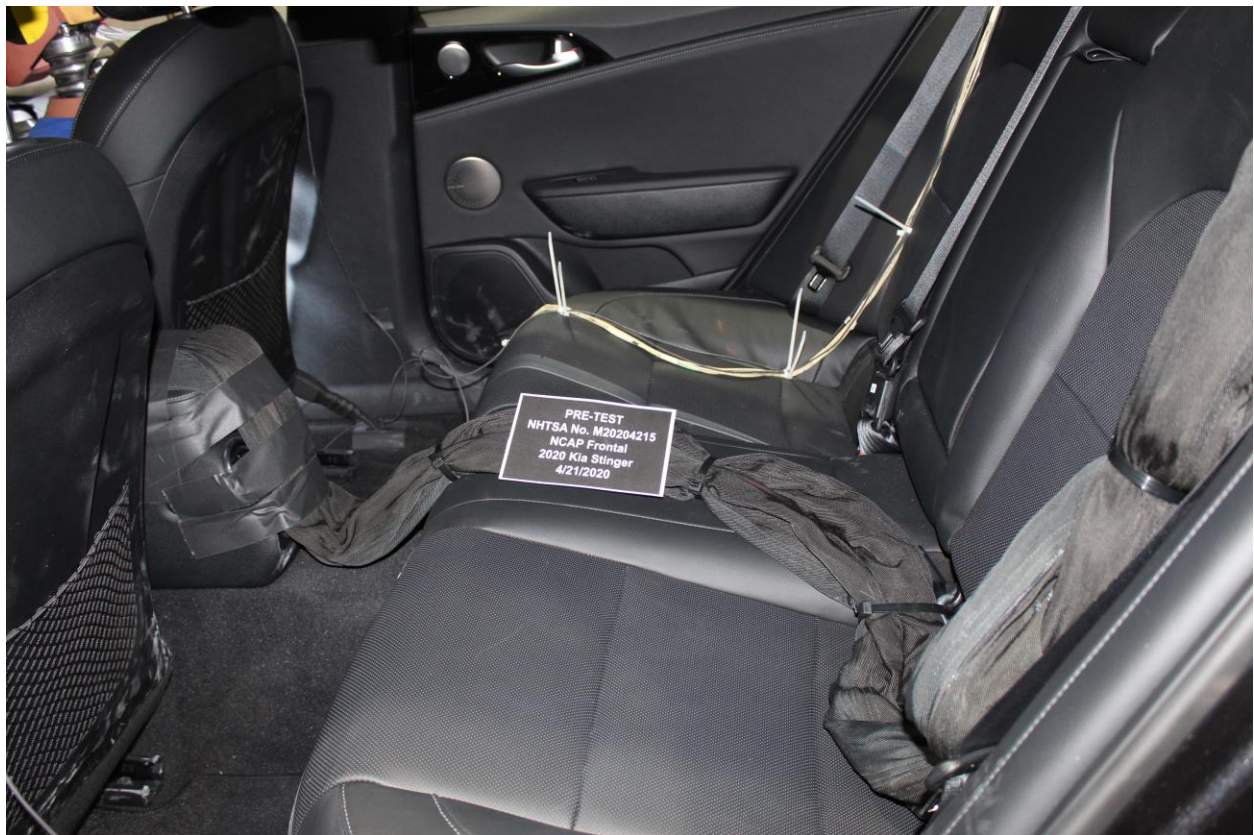


Figure A-28: Pre-Test Dummy Cable Routing



Figure A-29: Post-Test Dummy Cable Routing

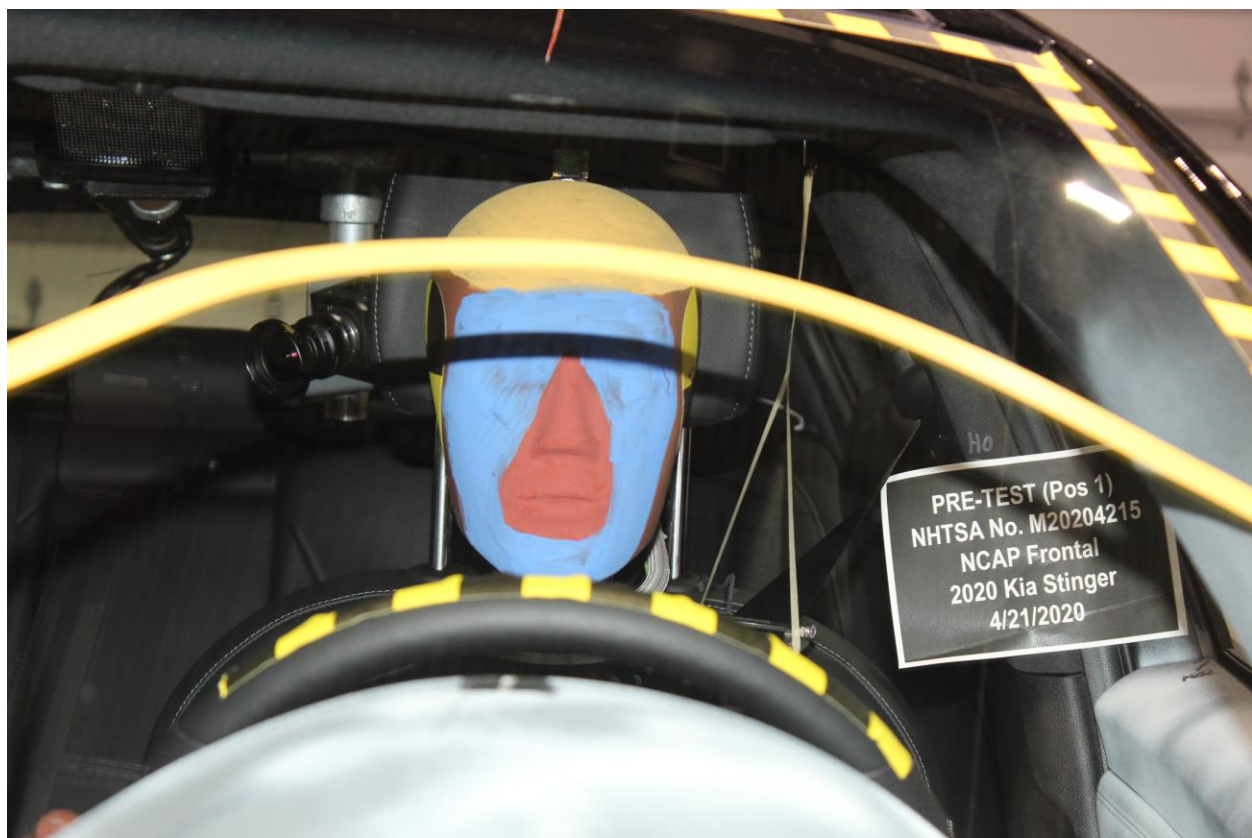


Figure A-30: Pre-Test Driver Dummy Front View

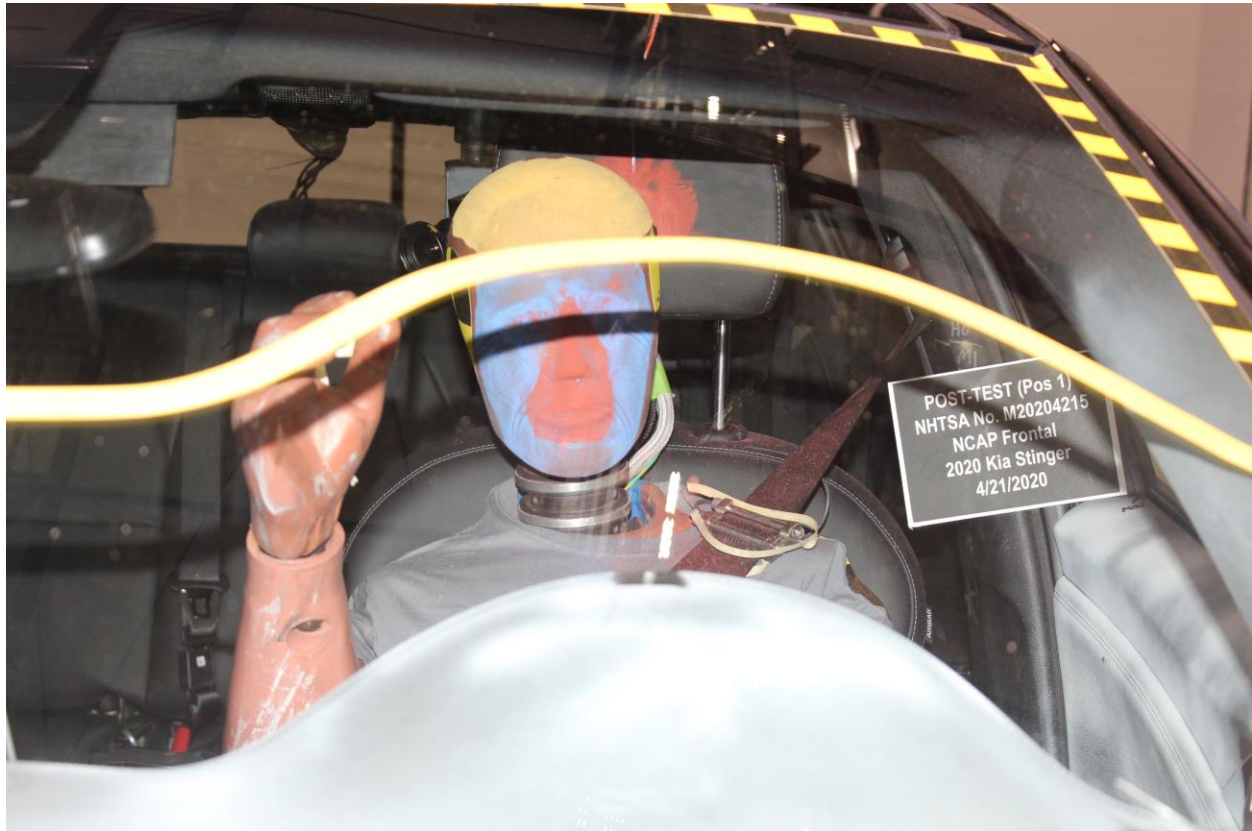


Figure A-31: Post-Test Driver Dummy Front View



Figure A-32: Pre-Test Driver Dummy Window View



Figure A-33: Post-Test Driver Dummy Window View



Figure A-34: Pre-Test Driver Dummy and Vehicle Interior View



Figure A-35: Post-Test Driver Dummy and Vehicle Interior View



Figure A-36: Pre-Test Driver's Seat Fore-Aft Markings



Figure A-37: Post-Test Driver's Seat Fore-Aft Markings



Figure A-38: Pre-Test View of Belt Anchorage for Driver Dummy



Figure A-39: Post-Test View of Belt Anchorage for Driver Dummy



Figure A-40: Pre-Test View of Belt Buckle and Latch Plate for Driver Dummy



Figure A-41: Post-Test View of Belt Buckle and Latch Plate for Driver Dummy



Figure A-42: Pre-Test Driver Dummy Feet

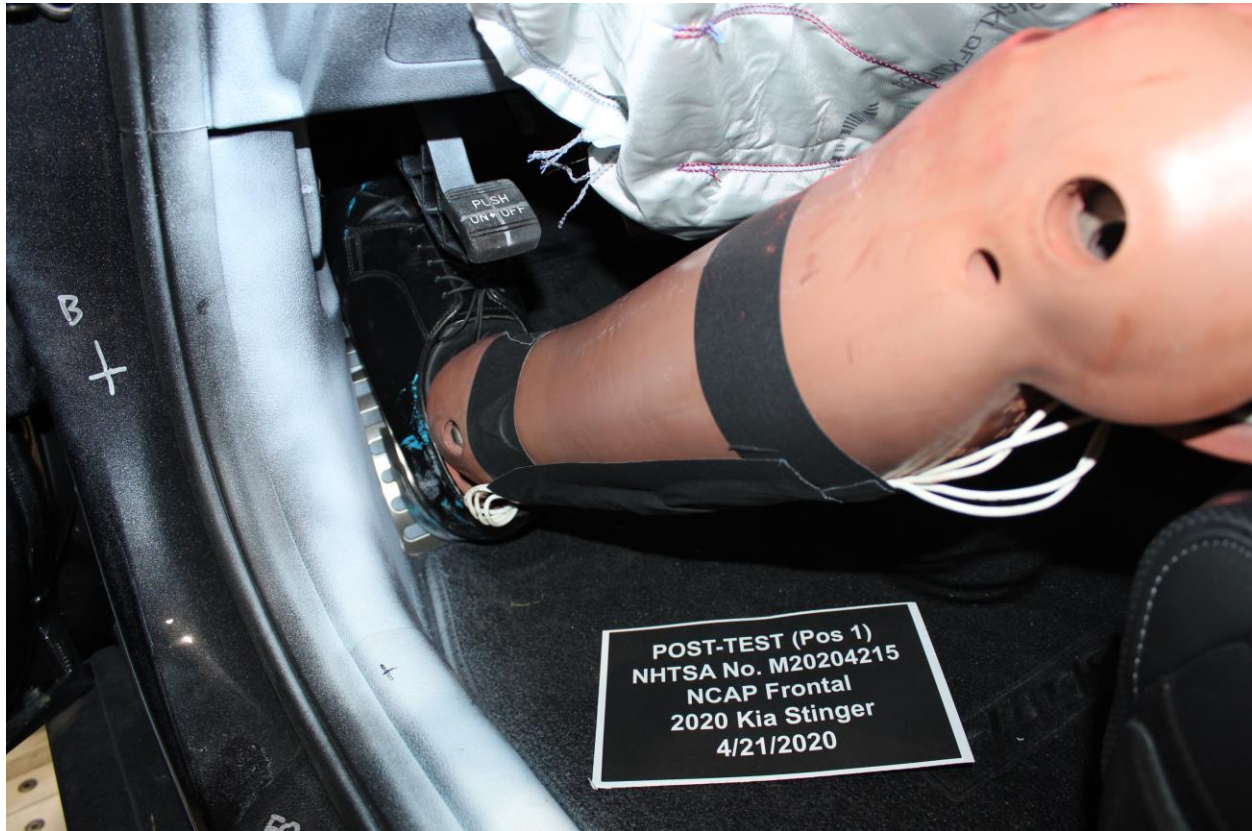


Figure A-43: Post-Test Driver Dummy Feet



Figure A-44: Pre-Test Driver's Side Knee Bolster



Figure A-45: Post-Test Driver's Side Knee Bolster



Figure A-46: Pre-Test Driver's Side Floorpan



Figure A-47: Post-Test Driver's Side Floorpan



Figure A-48: Post-Test Driver Dummy Face



Figure A-49: Post-Test Driver Dummy Contact With Airbag



Figure A-50: Post-Test Driver Dummy Contact With Headrest



Figure A-51: Pre-Test View of the Steering Wheel



Figure A-52: Post-Test View of the Steering Wheel



Figure A-53: Pre-Test Passenger Dummy Front View



Figure A-54: Post-Test Passenger Dummy Front View

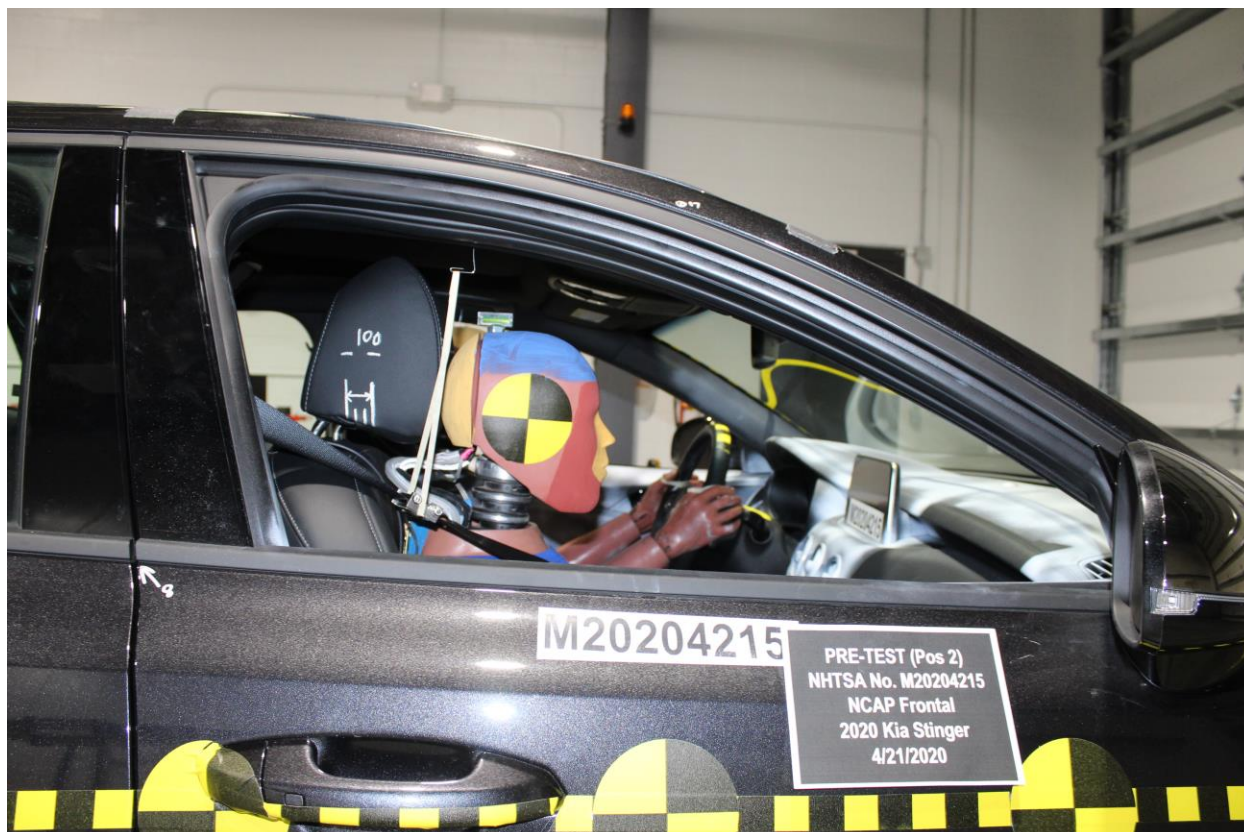


Figure A-55: Pre-Test Passenger Dummy Window View



Figure A-56: Post-Test Passenger Dummy Window View



Figure A-57: Pre-Test Passenger Dummy and Vehicle Interior View



Figure A-58: Post-Test Passenger Dummy and Vehicle Interior View



Figure A-59: Pre-Test Passenger's Seat Fore-Aft Markings



Figure A-60: Post-Test Passenger's Seat Fore-Aft Markings



Figure A-61: Pre-Test View of Belt Anchorage for Passenger Dummy



Figure A-62: Post-Test View of Belt Anchorage for Passenger Dummy



Figure A-63: Pre-Test View of Belt Buckle and Latch Plate for Passenger Dummy



Figure A-64: Post-Test View of Belt Buckle and Latch Plate for Passenger Dummy



Figure A-65: Pre-Test Passenger Dummy Feet



Figure A-66: Post-Test Passenger Dummy Feet



Figure A-67: Pre-Test Passenger's Side Knee Bolster



Figure A-68: Post-Test Passenger's Side Knee Bolster



Figure A-69: Pre-Test Passenger's Side Floorpan



Figure A-70: Post-Test Passenger's Side Floorpan



Figure A-71: Post-Test Passenger Dummy Face



Figure A-72: Post-Test Passenger Dummy Contact With Airbag



Figure A-73: Post-Test Passenger Dummy Contact With Headrest

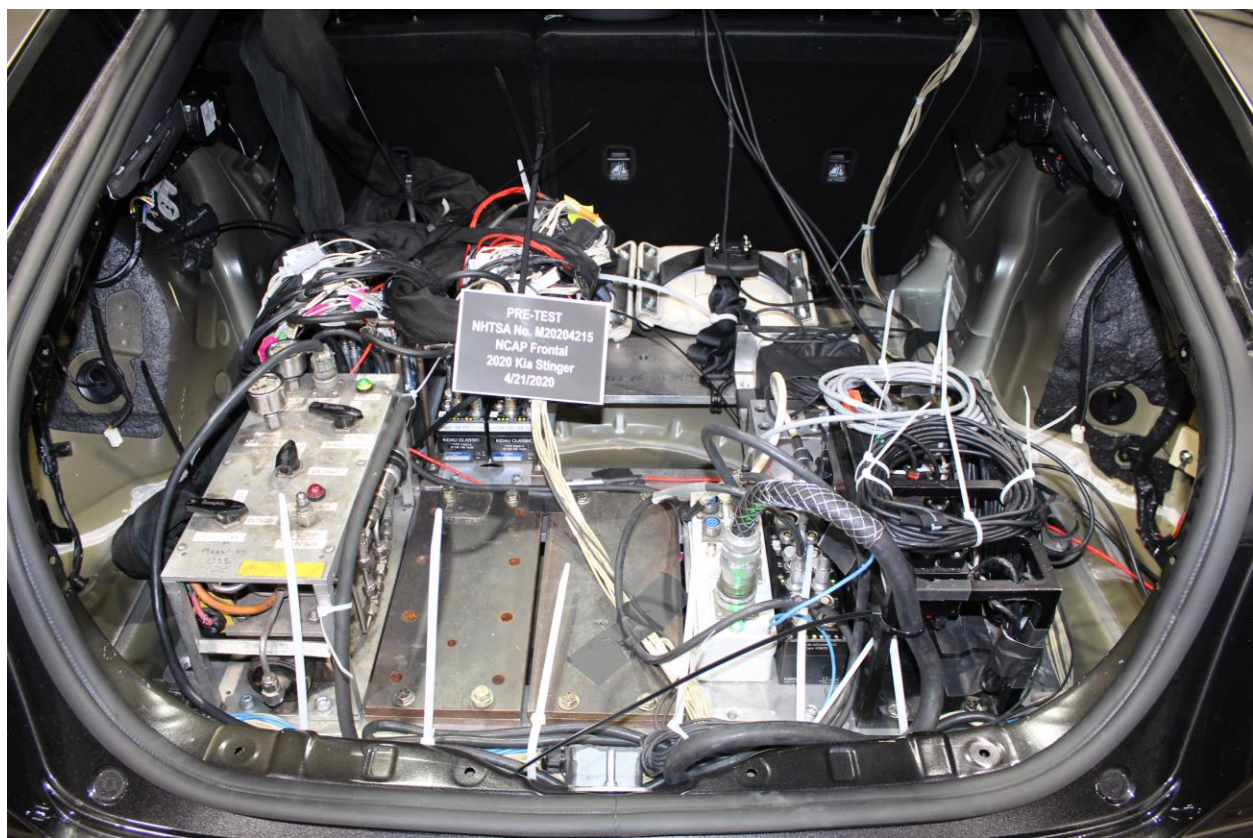


Figure A-74: Photograph of Ballast Installed in Vehicle

Photo Not Applicable

Figure A-75: Post-Test Stoddard Solvent Spillage Location View, If Required



Figure A-76: Post-Test Speed Trap Read-Out



Figure A-77: Vehicle at 0° on Static Rollover Device



Figure A-78: Vehicle at 90° on Static Rollover Device



Figure A-79: Vehicle at 180° on Static Rollover Device

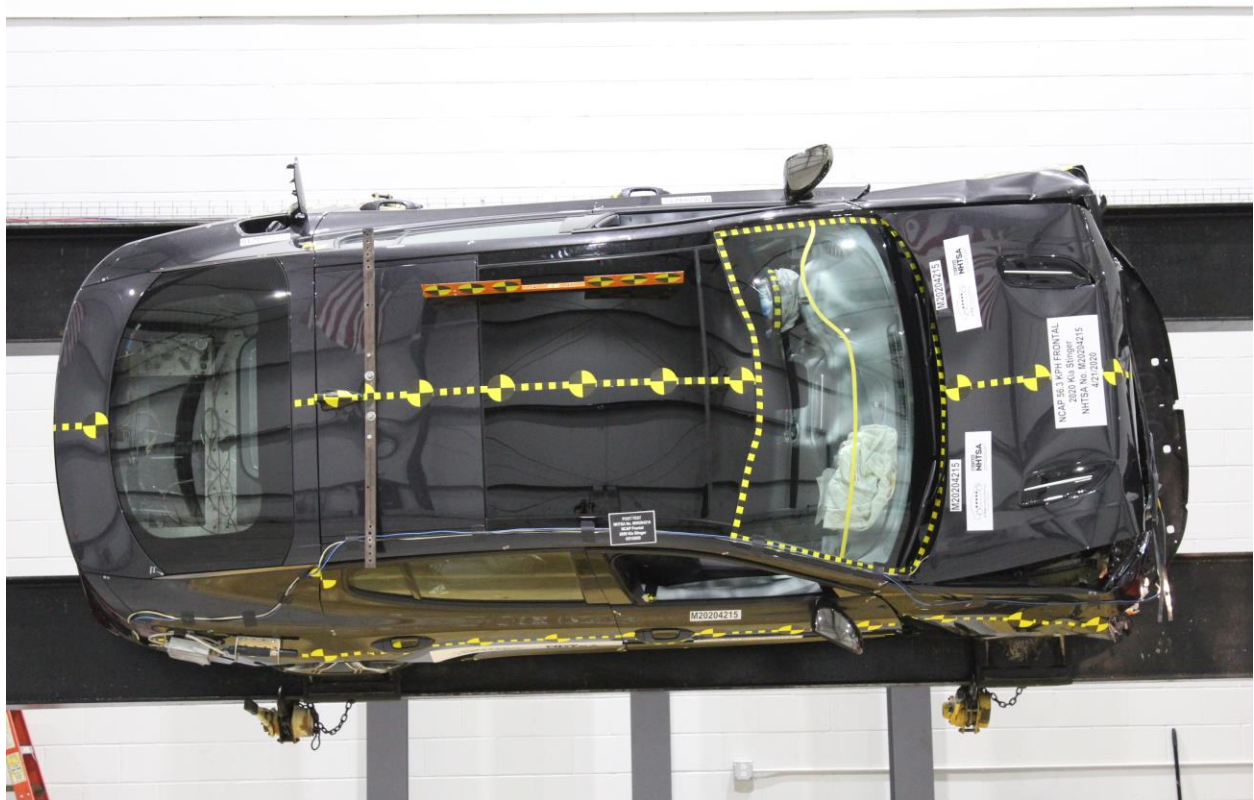


Figure A-80: Vehicle at 270° on Static Rollover Device



Figure A-81: Vehicle at 360° on Static Rollover Device



Figure A-82: 2020 KIA Stinger Frontal Impact Event

2020 STINGER GT-LINE AWD		Sold To: W0006 Frank Boucher Kia 9801 WASHINGTON AVE. RACINE WI 53406		Ship To: W0006		
MODEL/OPT CODE: H5412 / 015 EXTERIOR COLOR: PANTHERA METAL INTERIOR COLOR: BLACK VEHICLE ID NUMBER: KNAE1SLA7L6074115 PORT OF ENTRY: TACOMA						
STANDARD FEATURES		MANUFACTURER'S SUGGESTED RETAIL PRICE ▶		\$ 35,290.00		
MECHANICAL 2.0L Twin Scroll Turbo 4-Cyl Engine 8-Speed Automatic Transmission w/Paddle Shifters All-Wheel Drive (AWD) Drive Modes (Eco, Smart, Comfort, Sport, Custom) 4-Wheel Disc Brakes		ADDITIONAL INSTALLED EQUIPMENT: (In addition to or in place of standard features) Sun and Sound Package - Power Sunroof with Sunshade - Navigation System w/ 8" Touchscreen - Harman/Kardon Surround Sound Audio - UVO eServices (5 yr trial; see owners.kia.com for details) - Power Adj. Passenger's Seat Carpeted Floor Mats for AWD Only Wheel Locks		\$2,900.00 \$150.00 \$60.00		
KIA DRIVEWISE DRIVER-ASSIST TECHNOLOGY Blind-Spot Collision Warning (BCW) Rear Cross-Traffic Collision Warning (RCCW) Parking Distance Warning-Reverse (PDW-R)						
SAFETY Dual Front Advanced Airbags & Driver's Knee Airbag Dual Front Seat-Mounted Side & Full-Length Curtain Airbags Anti-Lock Braking System (ABS) Electronic Stability Control (ESC) Tire Pressure Monitoring System (TPMS)						
INTERIOR, COMFORT & CONVENIENCE Leather Seat Trim w/ Heated Front Seats 7" Touchscreen w/ Android Auto & Apple CarPlay Rear Camera with Dynamic Guidelines Dual Zone - Full Automatic Temperature Control SIRIUSXM™ wireless 3-mo. subscription* Bluetooth® Wireless Technology, USB Input Wireless Phone Charger Power Adj. Driver's Seat w/ Power Lumbar Support Steering Wheel Controls (Bluetooth/Audio/Cruise) Heated Steering Wheel Smart Key with Push Button Start Auto-Dimming Rearview Mirror Rear Seat Temperature-Adjustable Vents						
EXTERIOR 18" Alloy Wheels Auto-On/Off Projector Headlights LED Taillights Acoustic Front Side Windows Front Door Handle Pocket Illumination Heated Outside Mirrors						
WARRANTY 10 Year/100,000 Mile Limited Powertrain Warranty 5 Year/60,000 Mile Limited Basic Warranty 5 Year/60,000 Mile Roadside Assistance *Ask dealer for details		MSRP INCLUDING OPTIONS INLAND FREIGHT AND HANDLING		\$ 38,400.00 \$ 995.00		
		TOTAL MANUFACTURER'S SUGGESTED RETAIL PRICE ▶		\$ 39,395.00		
TOTAL ADDITIONAL WEIGHT: 9.4						

Figure A-83: Monroney Label Photograph

APPENDIX B
VEHICLE & DUMMY RESPONSE DATA TRACES

Table of Data Plots





No.	Description	Page
Plot 1	Driver Head X Acceleration vs. Time Primary	B-5
Plot 2	Driver Head Y Acceleration vs. Time Primary	B-5
Plot 3	Driver Head Z Acceleration vs. Time Primary	B-5
Plot 4	Driver Head Resultant Acceleration vs. Time Primary	B-5
Plot 5	Driver Chest X Deflection vs. Time	B-6
Plot 6	Driver Chest X Acceleration vs. Time Primary	B-6
Plot 7	Driver Chest Y Acceleration vs. Time Primary	B-6
Plot 8	Driver Chest Z Acceleration vs. Time Primary	B-6
Plot 9	Driver Chest Resultant Acceleration vs. Time Primary	B-7
Plot 10	Driver Upper Neck Force X vs. Time Primary	B-7
Plot 11	Driver Upper Neck Force Z vs. Time Primary	B-7
Plot 12	Driver Upper Neck Moment Y vs. Time Primary	B-7
Plot 13	Driver Nij vs. Time Primary	B-8
Plot 14	Driver Left Femur Force vs. Time	B-8
Plot 15	Driver Right Femur Force vs. Time	B-8
Plot 16	Passenger Head X Acceleration vs. Time Primary	B-8
Plot 17	Passenger Head Y Acceleration vs. Time Primary	B-9
Plot 18	Passenger Head Z Acceleration vs. Time Primary	B-9
Plot 19	Passenger Head Resultant Acceleration vs. Time Primary	B-9
Plot 20	Passenger Chest X Deflection vs. Time	B-9
Plot 21	Passenger Chest X Acceleration vs. Time Primary	B-10
Plot 22	Passenger Chest Y Acceleration vs. Time Primary	B-10
Plot 23	Passenger Chest Z Acceleration vs. Time Primary	B-10
Plot 24	Passenger Chest Resultant Acceleration vs. Time Primary	B-10
Plot 25	Passenger Upper Neck Force X vs. Time Primary	B-11
Plot 26	Passenger Upper Neck Force Z vs. Time Primary	B-11
Plot 27	Passenger Upper Neck Moment Y vs. Time Primary	B-11
Plot 28	Passenger Nij vs. Time Primary	B-11
Plot 29	Passenger Left Femur Force vs. Time	B-12
Plot 30	Passenger Right Femur Force vs. Time	B-12





The following additional dummy and vehicle response data can be found in the R&D section of the NHTSA website at www.NHTSA.gov





Driver Head X Acceleration Redundant
 Driver Head Y Acceleration Redundant
 Driver Head Z Acceleration Redundant
 Driver Upper Neck Force Y
 Driver Upper Neck Moment X
 Driver Upper Neck Moment Z
 Driver Chest X Acceleration Redundant
 Driver Chest Y Acceleration Redundant
 Driver Chest Z Acceleration Redundant
 Driver Pelvis X
 Driver Pelvis Y
 Driver Pelvis Z
 Driver Left Femur Redundant
 Driver Right Femur Redundant
 Driver Left Upper Tibia Moment X
 Driver Left Upper Tibia Moment Y





Driver Left Upper Tibia Force Z
Driver Left Lower Tibia Moment X
Driver Left Lower Tibia Moment Y
Driver Left Lower Tibia Force Z
Driver Right Upper Tibia Moment X
Driver Right Upper Tibia Moment Y
Driver Right Upper Tibia Force Z
Driver Right Lower Tibia Moment X
Driver Right Lower Tibia Moment Y
Driver Right Lower Tibia Force Z
Driver Left Foot Fore Z
Driver Left Foot Aft X
Driver Left Foot Aft Z
Driver Right Foot Fore Z
Driver Right Foot Aft X
Driver Right Foot Aft Z
Driver Shoulder Belt Force
Driver Lap Belt Force
Driver Head Angular Velocity X
Driver Head Angular Velocity Y
Driver Head Angular Velocity Z
Passenger Head X Acceleration Redundant
Passenger Head Y Acceleration Redundant
Passenger Head Z Acceleration Redundant
Passenger Upper Neck Force X
Passenger Upper Neck Force Z
Passenger Upper Neck Moment Y
Passenger Chest X Acceleration Redundant
Passenger Chest Y Acceleration Redundant
Passenger Chest Z Acceleration Redundant
Passenger Pelvis X
Passenger Pelvis Y
Passenger Pelvis Z
Passenger Left Femur Redundant
Passenger Right Femur Redundant
Passenger Left Upper Tibia Moment X
Passenger Left Upper Tibia Moment Y
Passenger Left Upper Tibia Force Z
Passenger Left Lower Tibia Moment X
Passenger Left Lower Tibia Moment Y
Passenger Left Lower Tibia Force Z
Passenger Right Upper Tibia Moment X
Passenger Right Upper Tibia Moment Y
Passenger Right Upper Tibia Force Z
Passenger Right Lower Tibia Moment X
Passenger Right Lower Tibia Moment Y
Passenger Right Lower Tibia Force Z
Passenger Left Foot Fore Z
Passenger Left Foot Aft X
Passenger Left Foot Aft Z





Passenger Right Foot Fore Z
Passenger Right Foot Aft X
Passenger Right Foot Aft Z
Passenger Shoulder Belt Force
Passenger Lap Belt Force
Passenger Head Angular Velocity X
Passenger Head Angular Velocity Y
Passenger Head Angular Velocity Z
Left Rear Seat Crossmember X
Left Rear Seat Crossmember Z
Right Rear Seat Crossmember X
Right Rear Seat Crossmember Z
Left Rear Seat Crossmember X Redundant
Right Rear Seat Crossmember X Redundant
Vehicle Engine Top X
Vehicle Engine Bottom X
Load Cell Barrier Forces and Moments

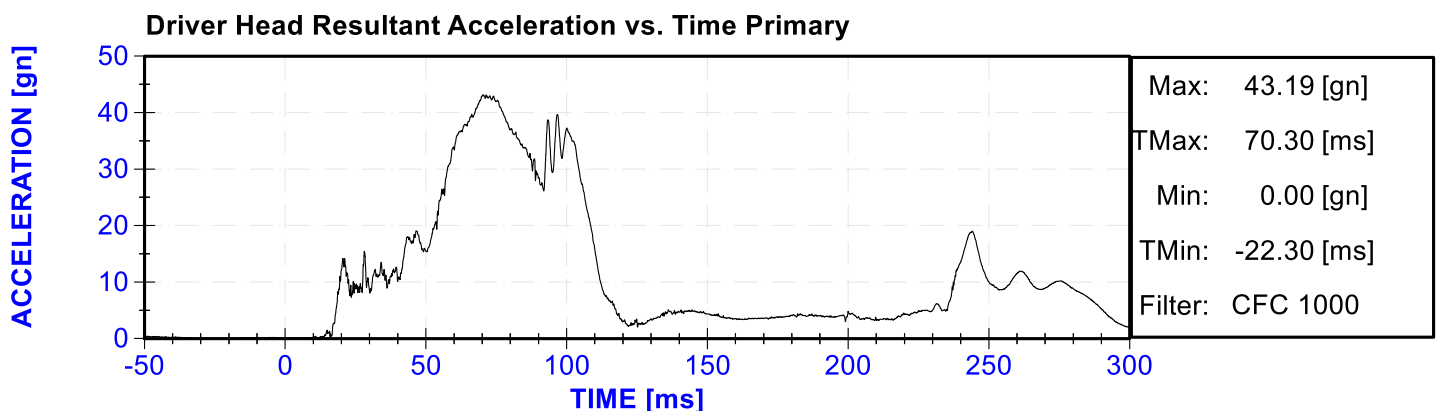
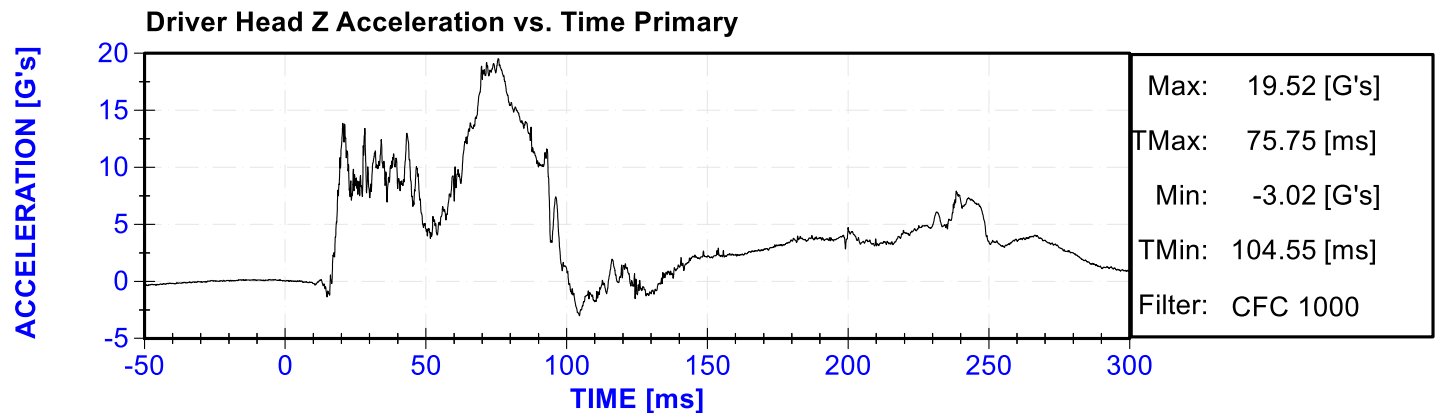
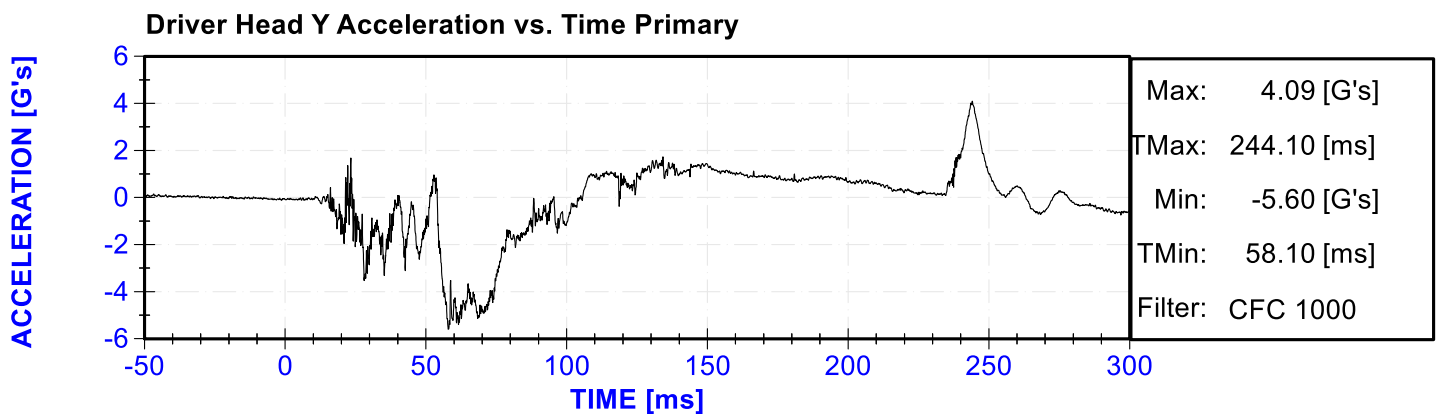
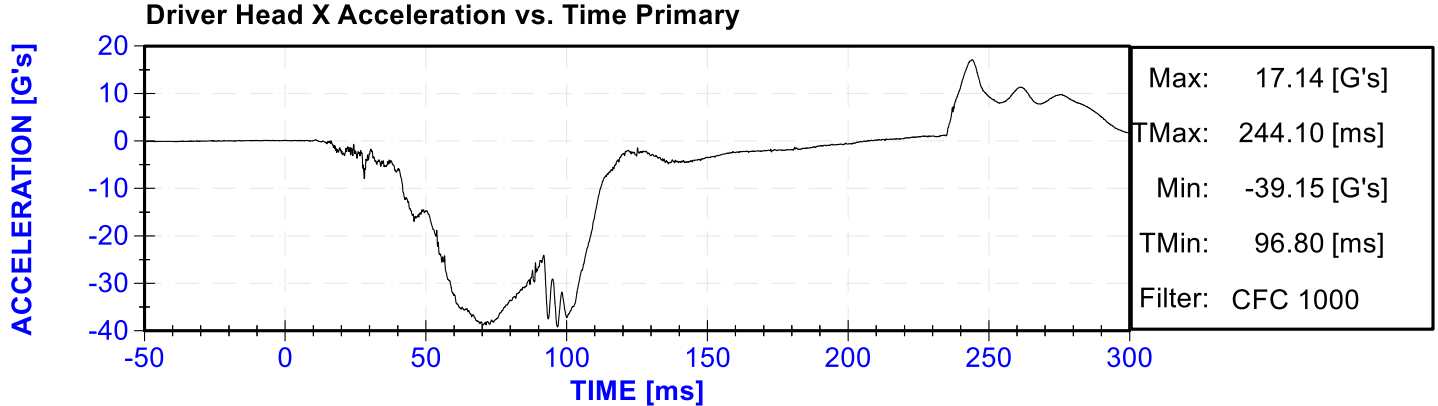


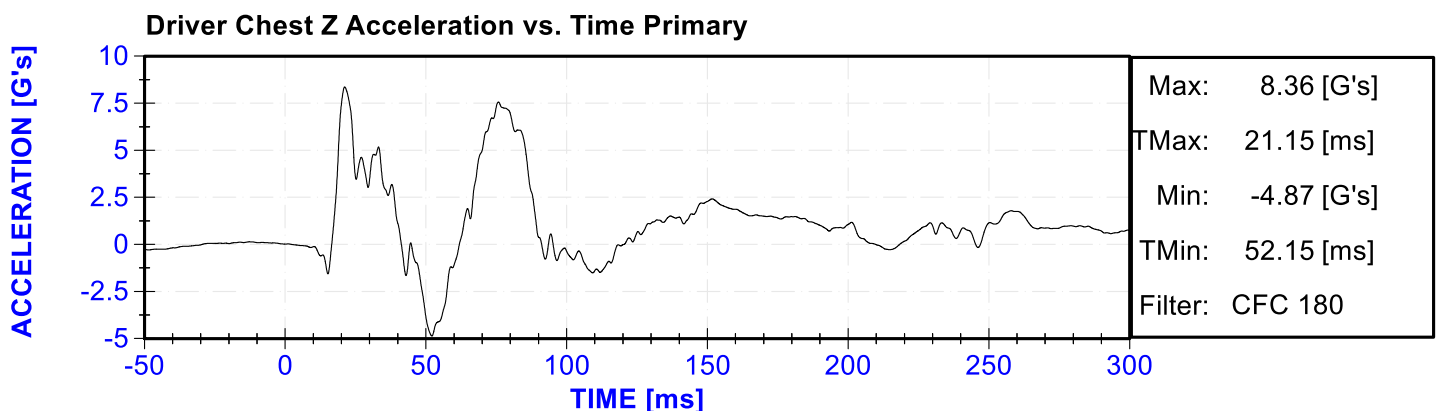
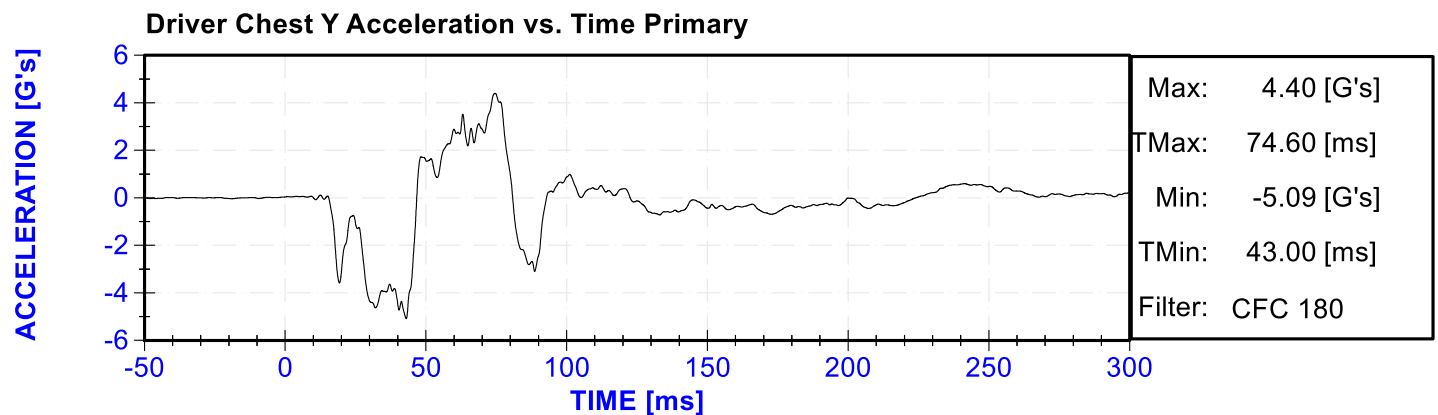
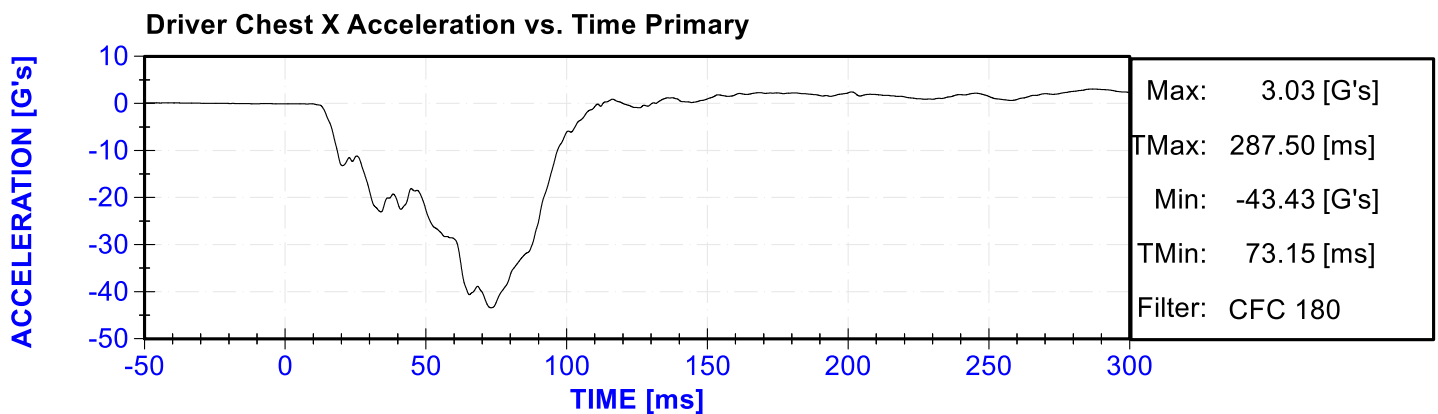
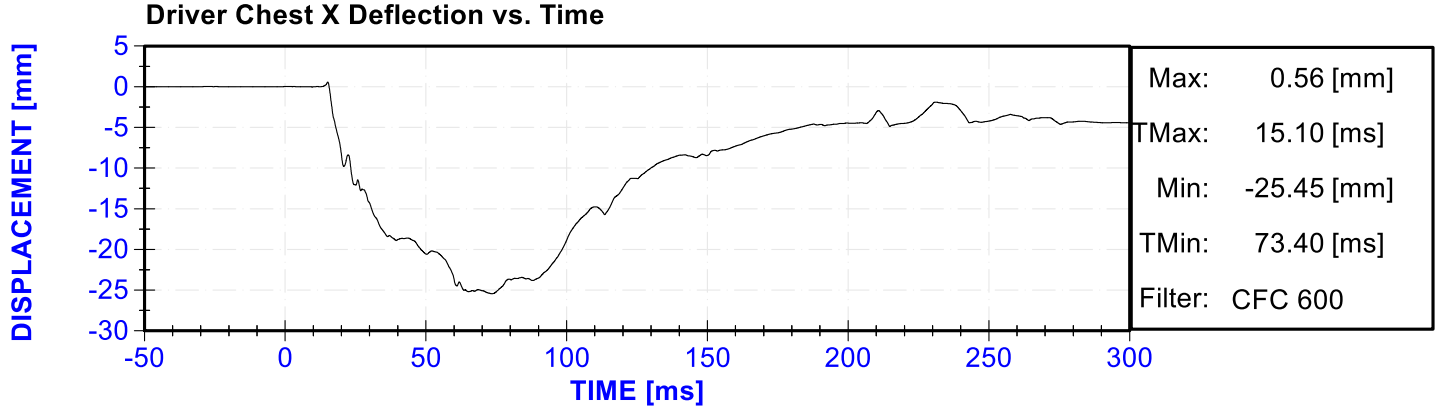


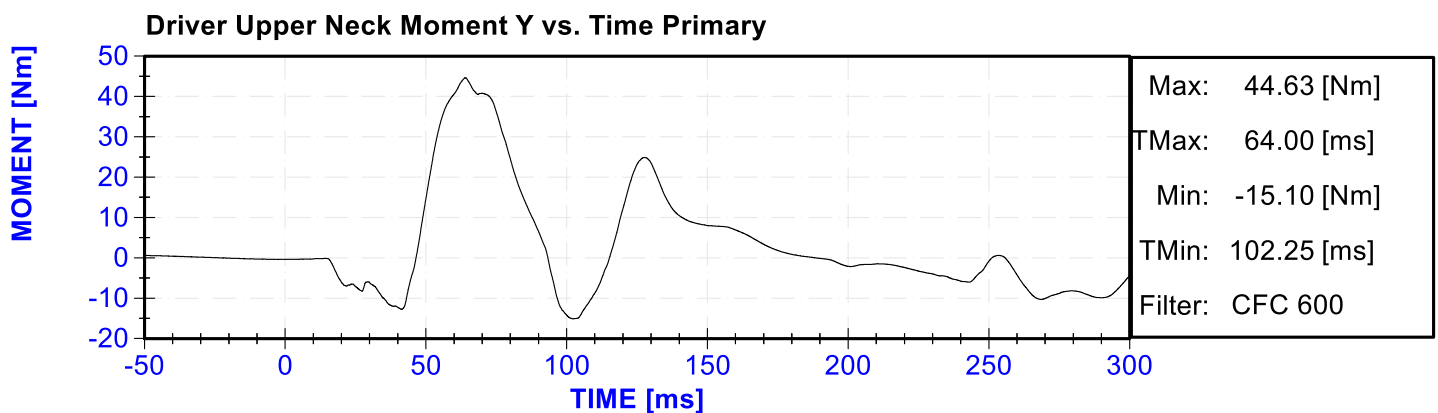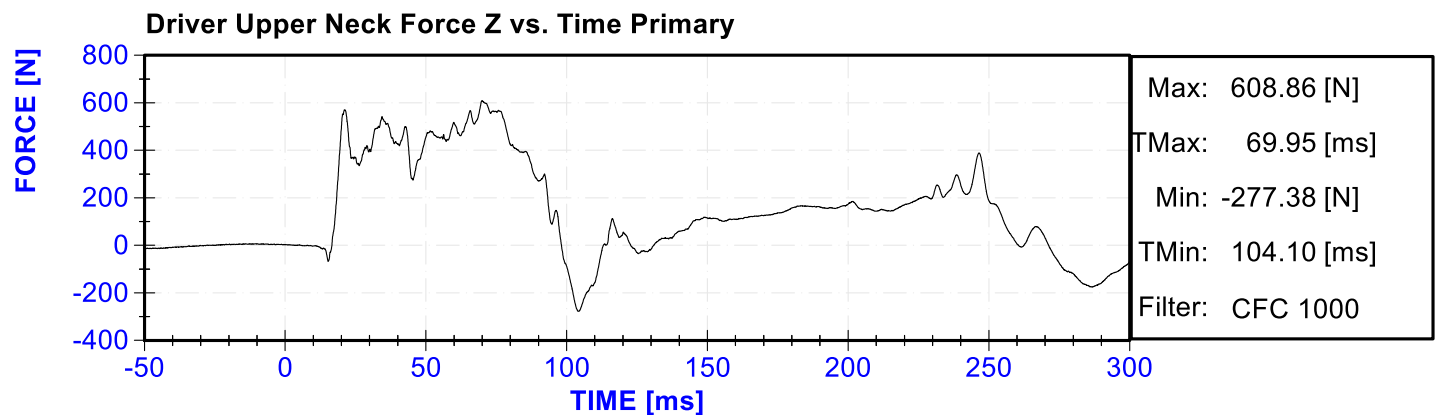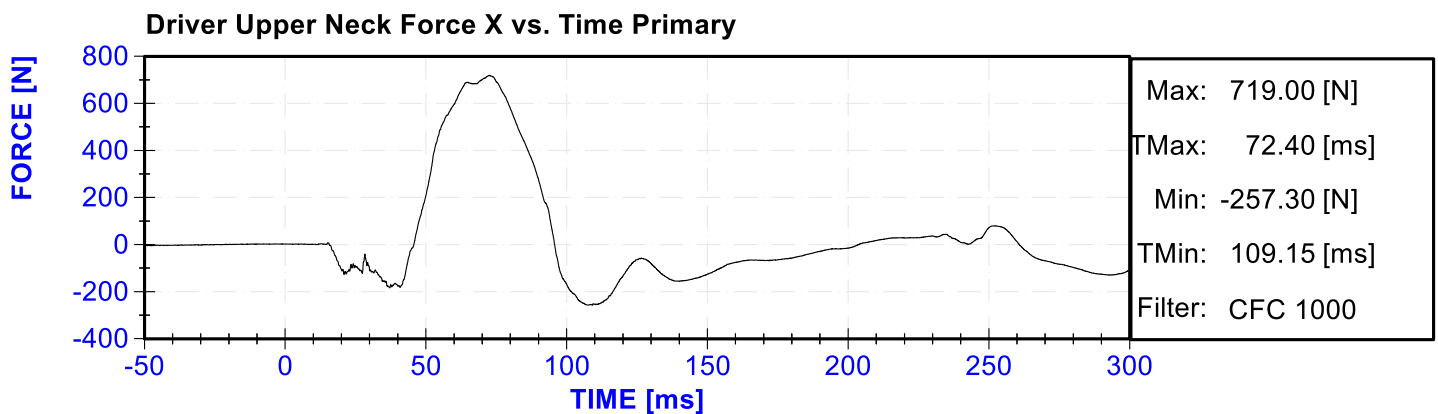
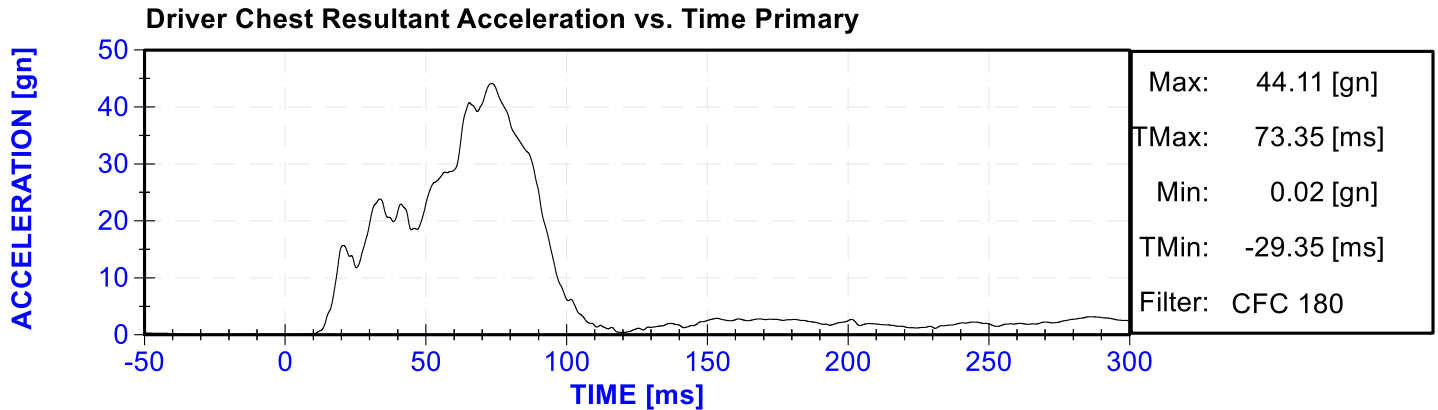


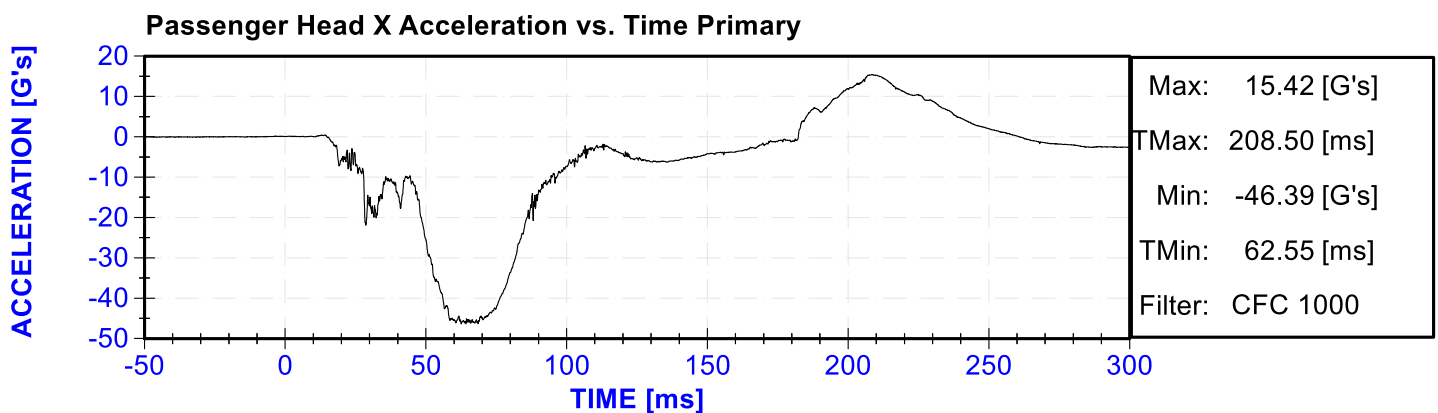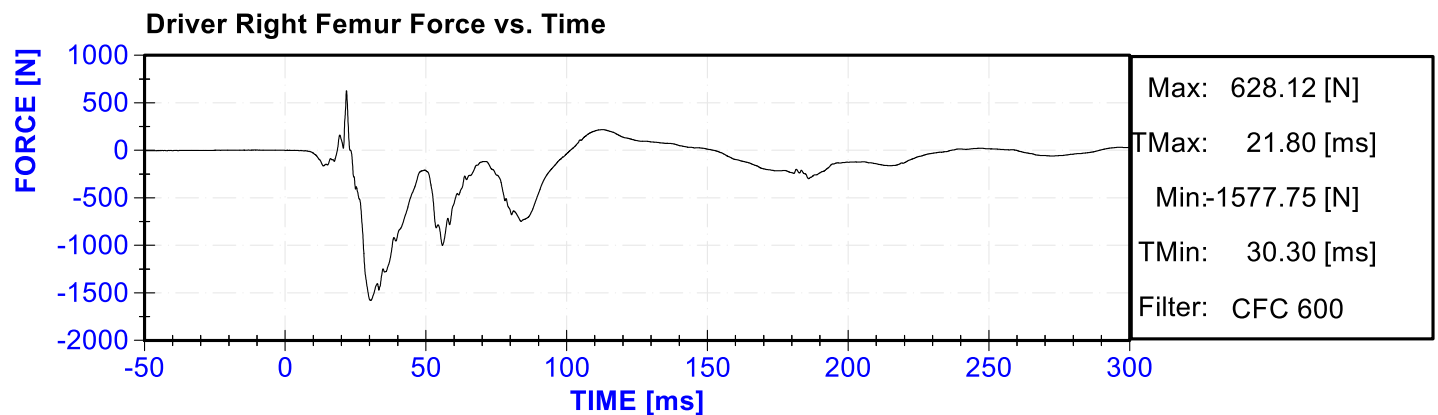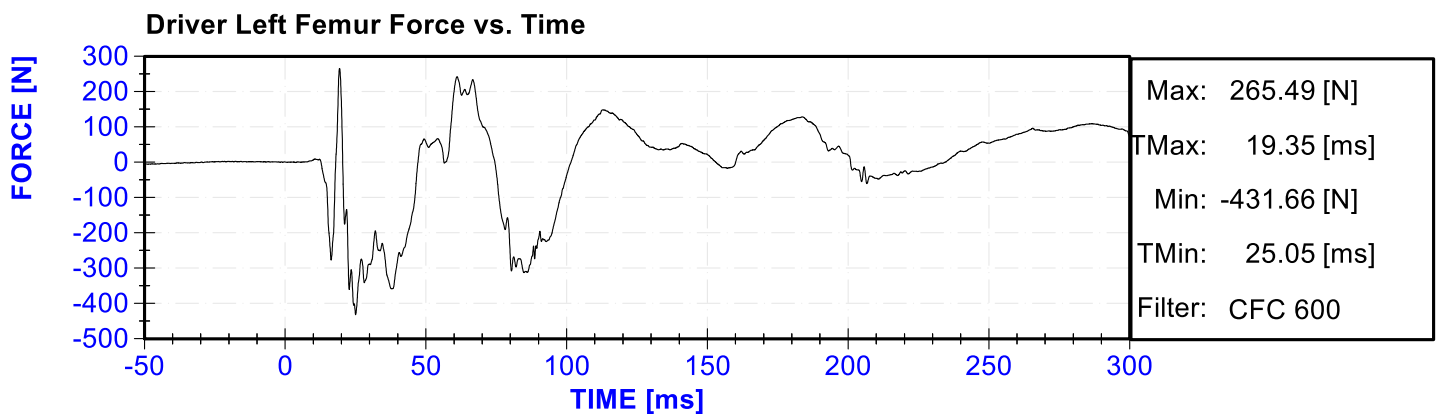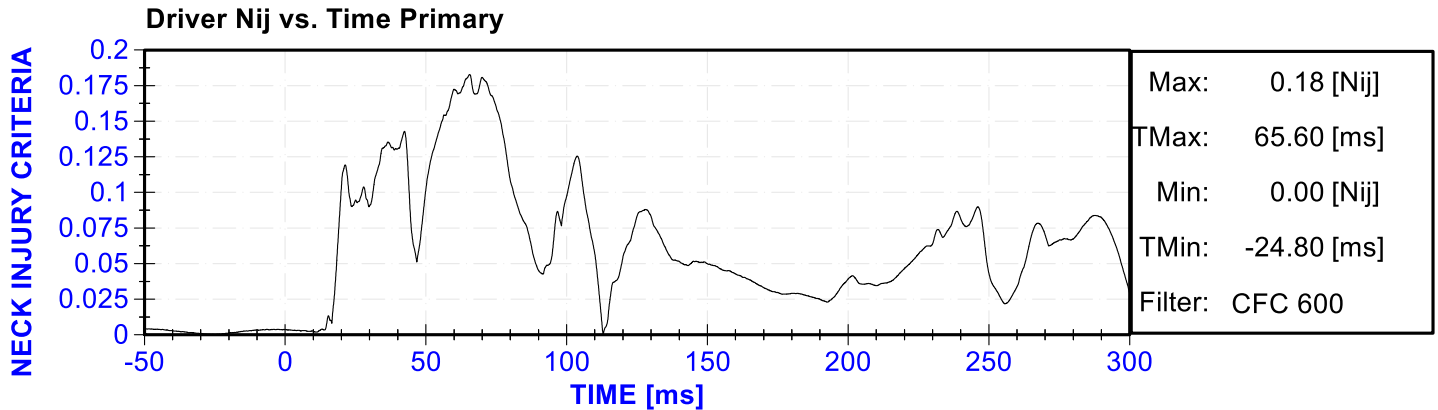

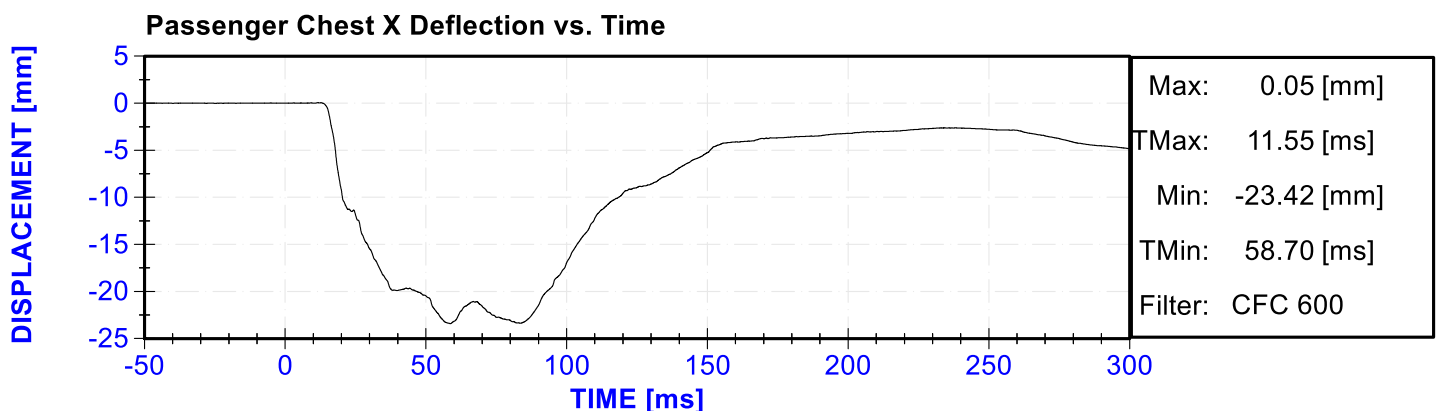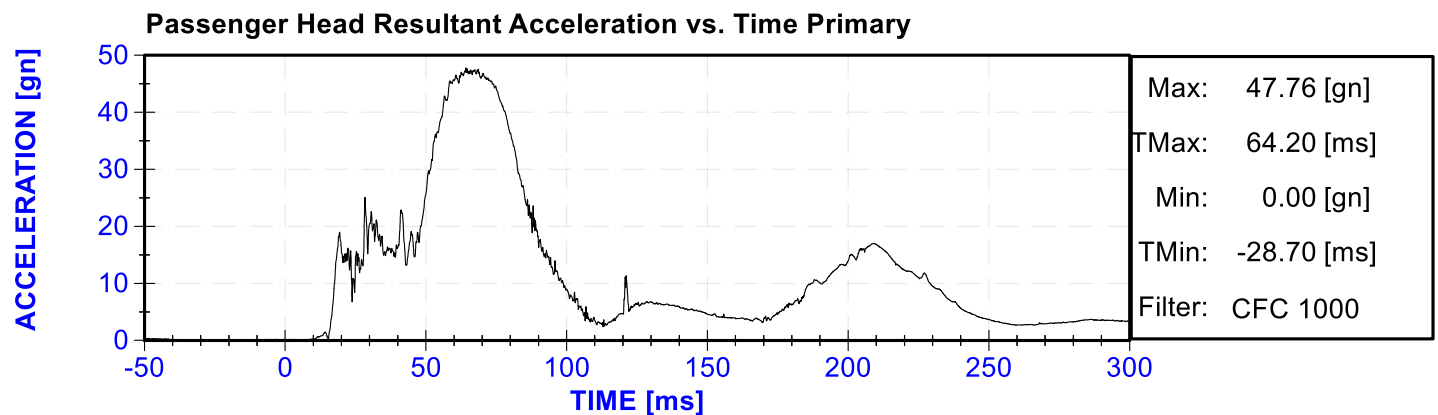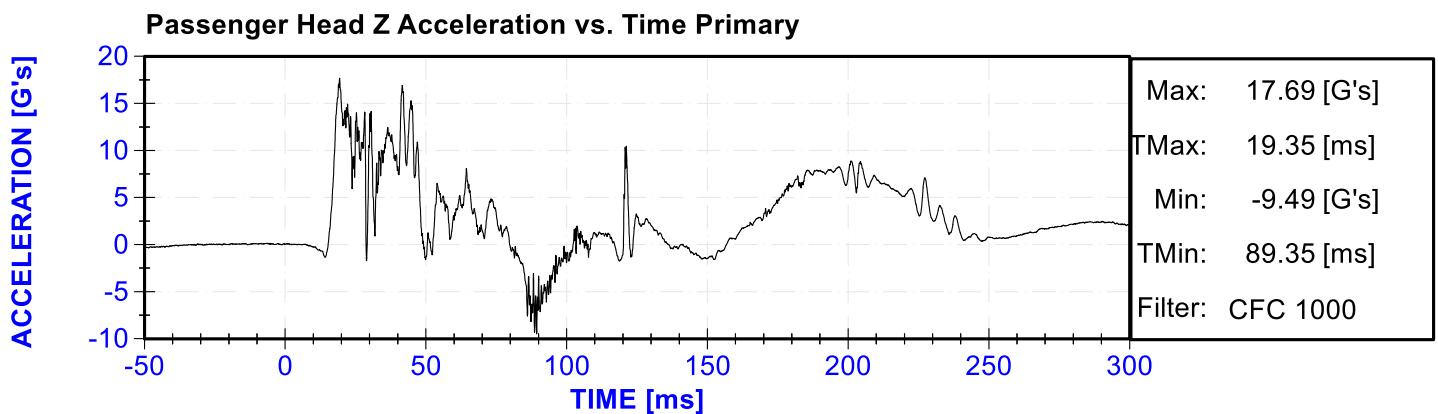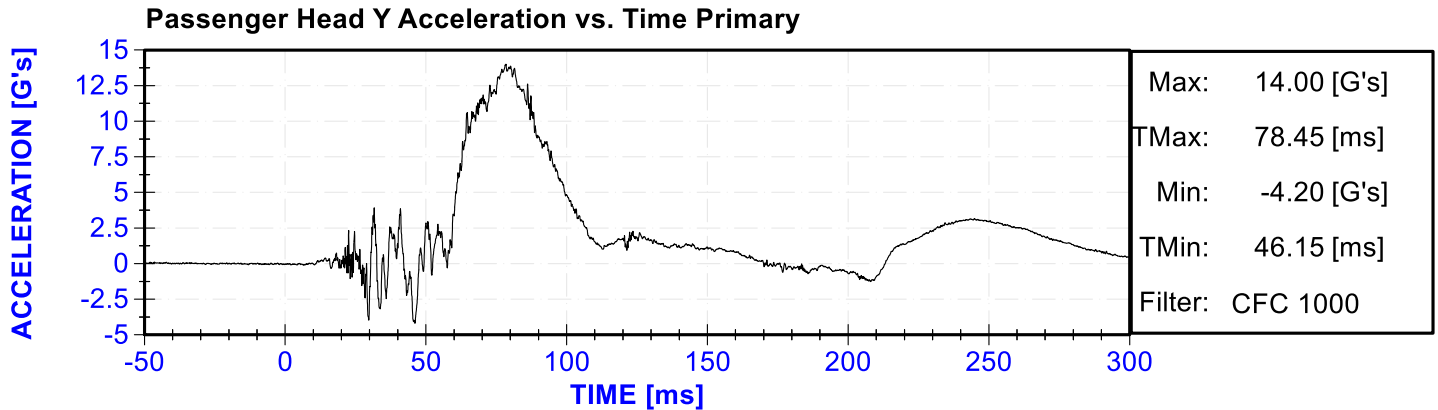

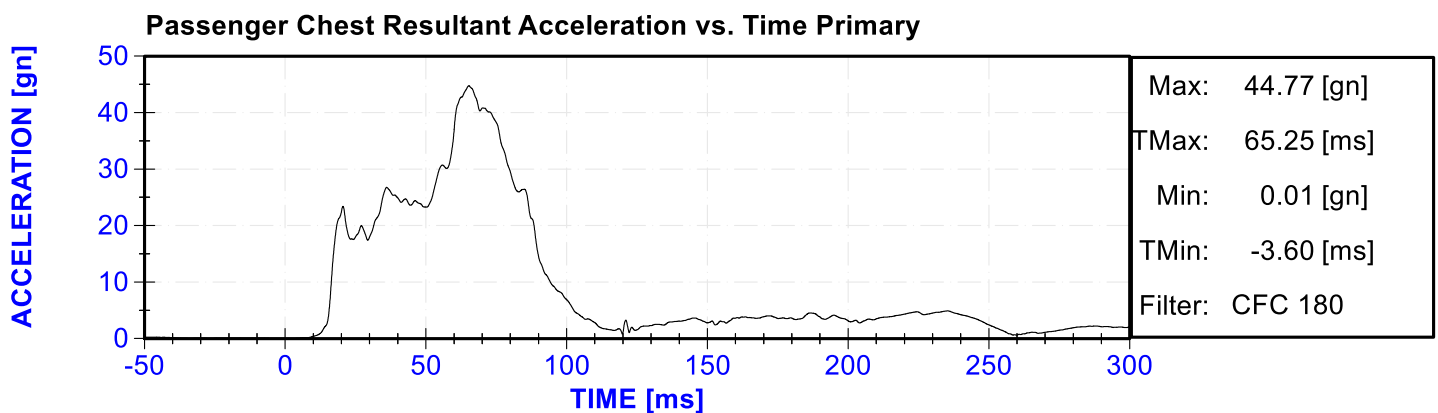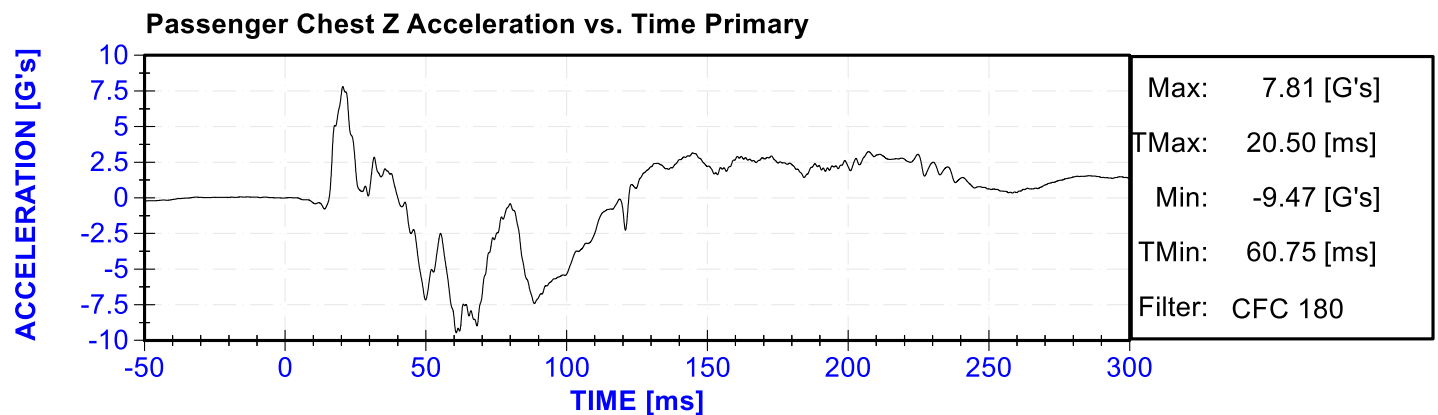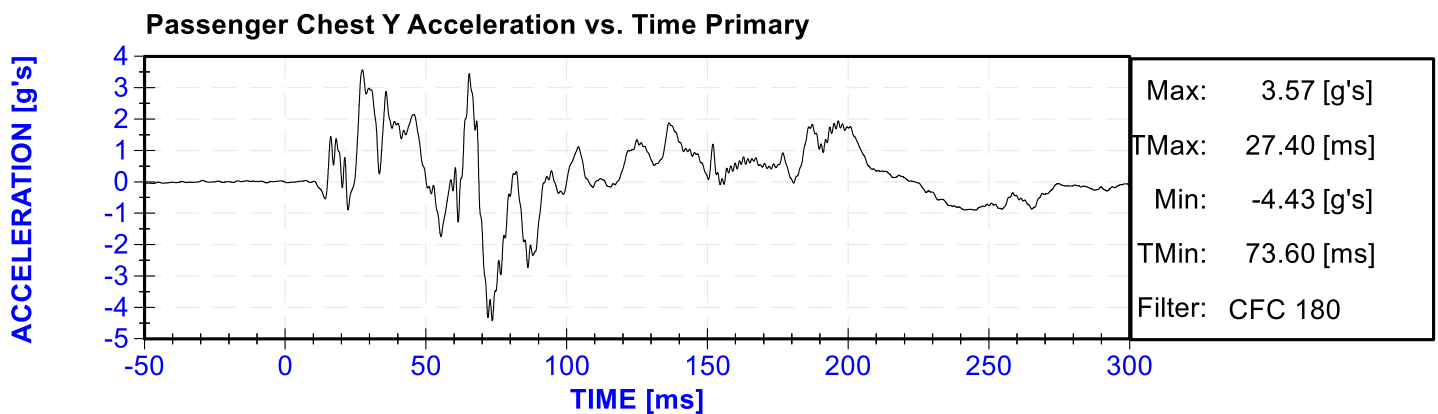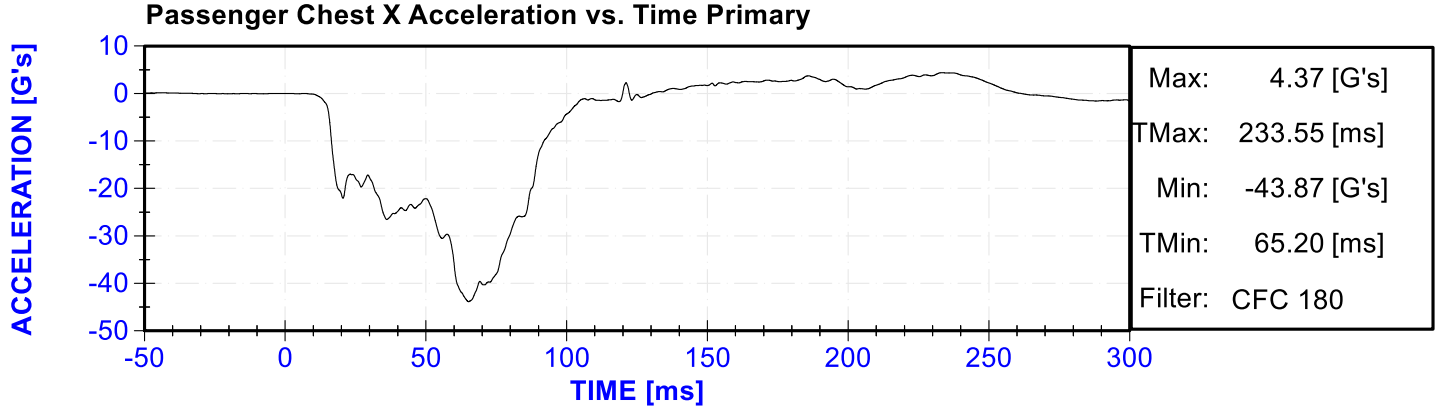

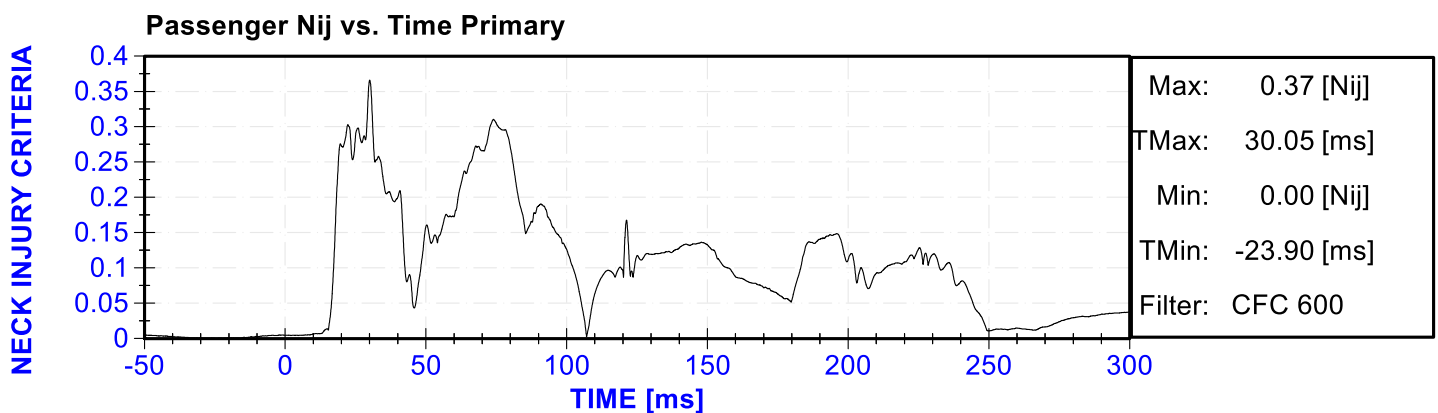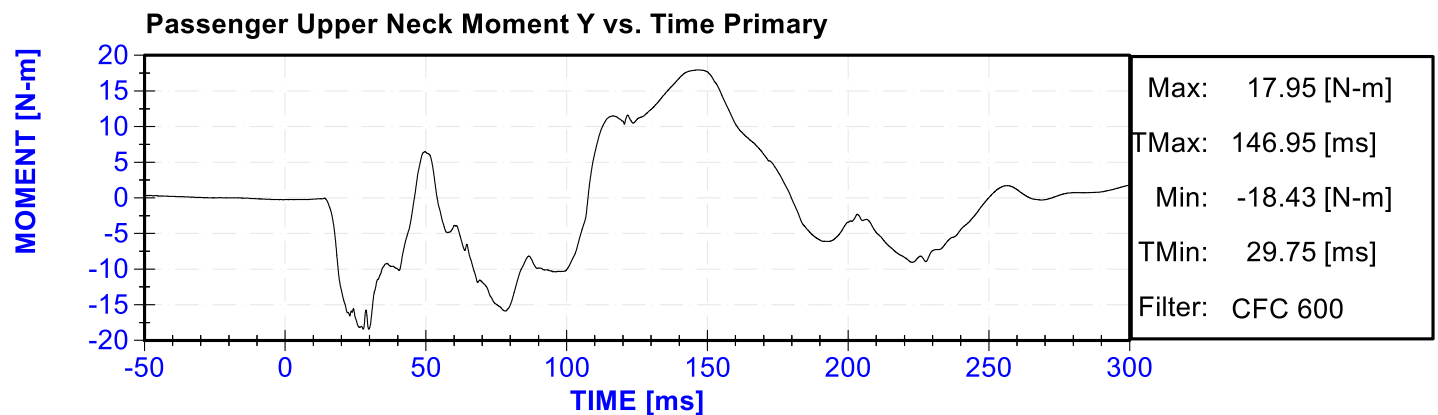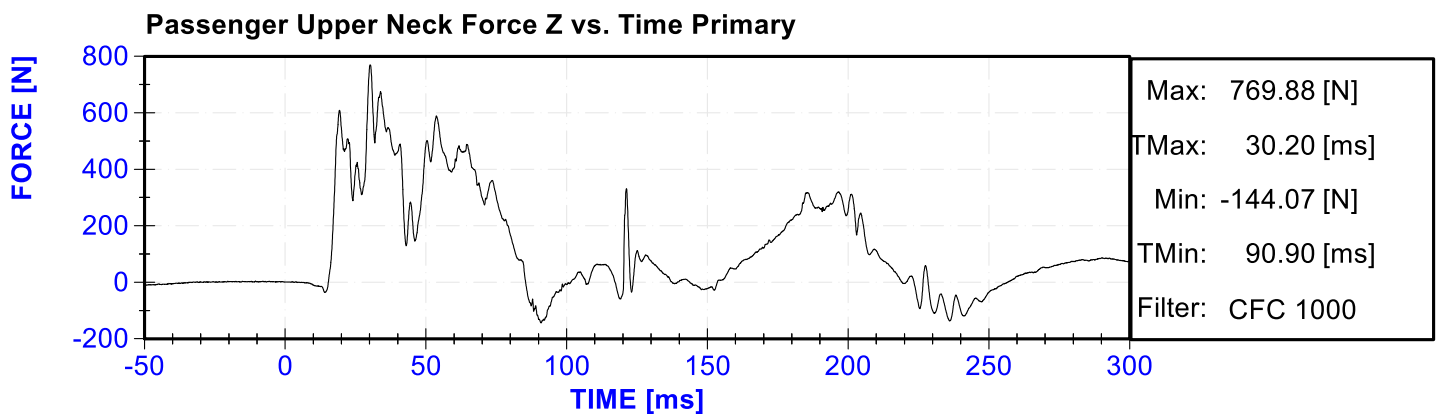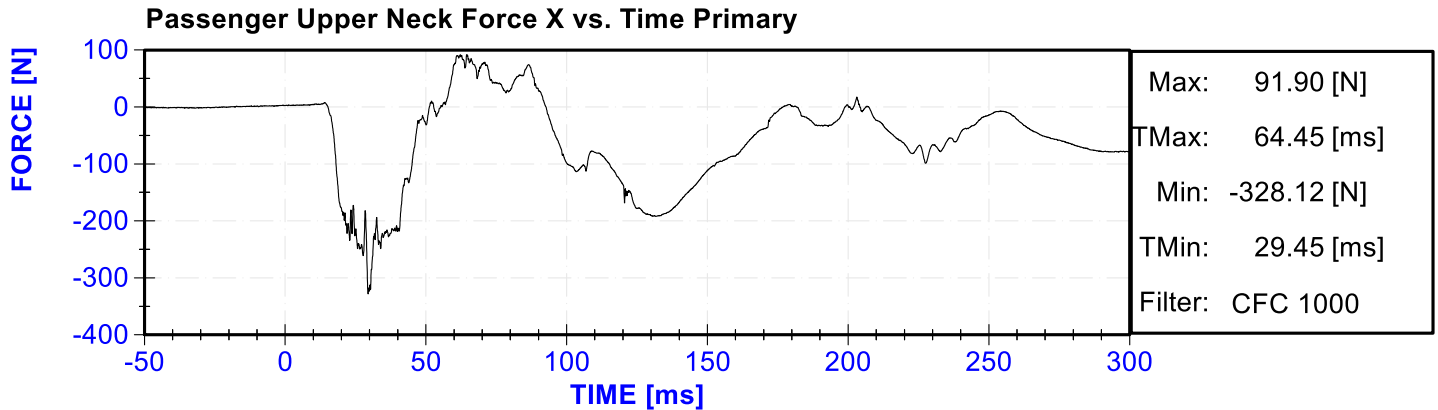

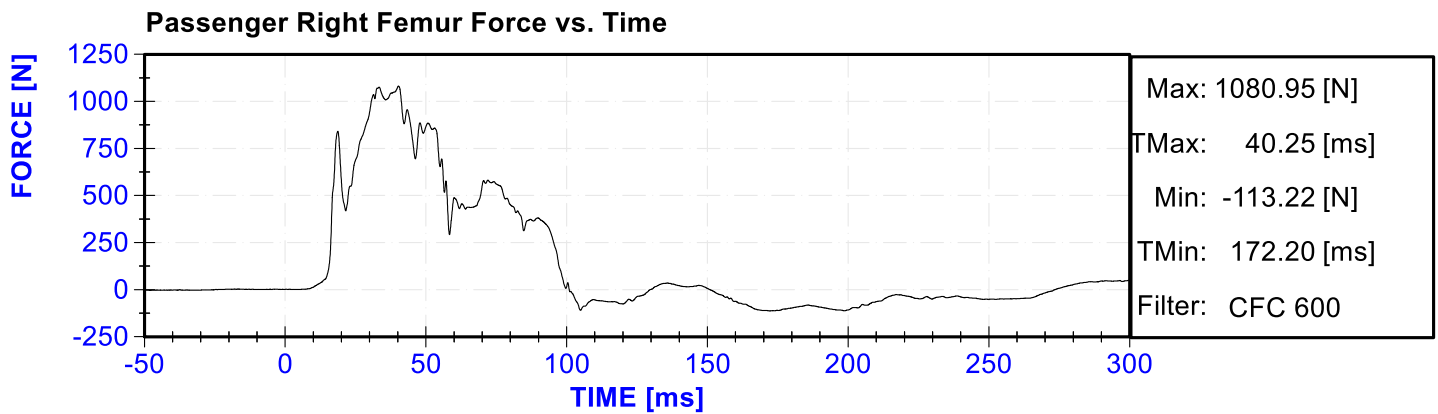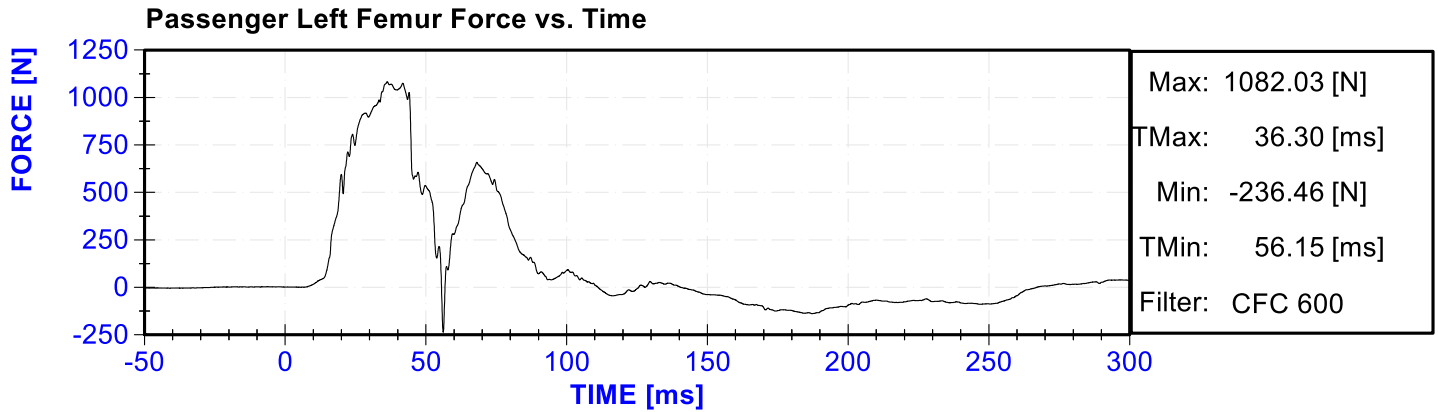

APPENDIX C

DUMMY CALIBRATION AND PERFORMANCE VERIFICATION DATA

CALIBRATION TEST RESULTS

PRE-TEST

HYBRID III 50TH PERCENTILE MALE - DRIVER ATD

SERIAL NO: 142




External Measurements - Hybrid 3 - 50th Male

Technician: K. Dutton

Date: 04/09/2020

Dummy Serial Number: 142

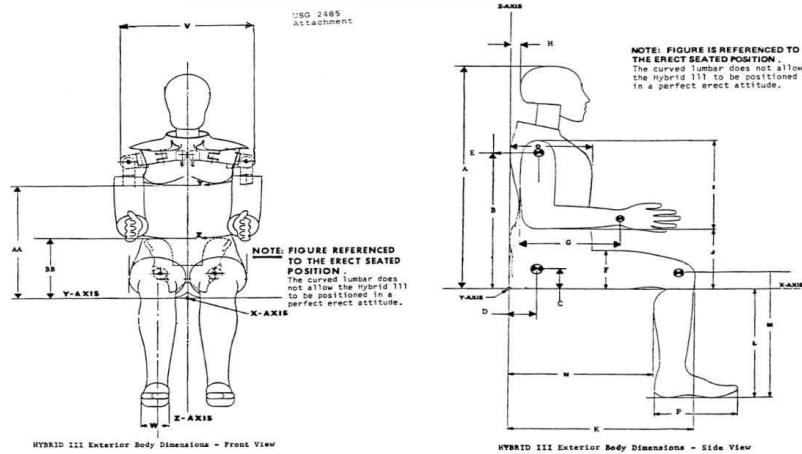

Symbol	Description	Specification (in)		Result (in)	Pass/Fail
A	Sitting Height	34.6	35.0	34.8	Pass
B	Shoulder Pivot Height	19.9	20.5	20.2	Pass
C	H-Point Height	3.3	3.5	3.4	Pass
D	H-Point from Backline	5.3	5.5	5.4	Pass
E	Shoulder Pivot from Backline	3.3	3.7	3.6	Pass
F	Thigh Clearance	5.5	6.1	5.9	Pass
G	Back of Elbow to Wrist Pivot	11.4	12.0	11.6	Pass
H	Head Back to Backline	1.6	1.8	1.7	Pass
I	Shoulder to Elbow Length	13.0	13.6	13.4	Pass
J	Elbow Rest Height	7.5	8.3	8.0	Pass
K	Buttock to Knee Length	22.8	23.8	23.5	Pass
L	Popliteal Height	16.9	17.9	17.4	Pass
M	Knee Pivot Height	19.1	19.7	19.6	Pass
N	Buttock Popliteal Length	17.8	18.8	18.5	Pass
O	Chest Depth without Jacket	8.4	9.0	8.7	Pass
P	Foot Length (right)	9.9	10.5	10.3	Pass
Q	Shoulder Breadth	16.3	17.2	16.9	Pass
R	Foot Breadth	3.6	4.2	3.8	Pass
S	Chest Circumference with Jacket	38.2	39.4	38.8	Pass
T	Waist Circumference	32.9	34.1	33.7	Pass
AA	Reference Location (Chest Circumference)	16.9	17.1	17.0	Pass
BB	Reference Location (Waist Circumference)	8.9	9.1	9.0	Pass


ATD Manufacturer	Humanetics	Test Technician	M. Dudek
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.6	Pass
Humidity	10	70	%	24.9	Pass
Resultant Acceleration	225	275	g's	274.7	Pass
Oscillation	0	10	%	2.5	Pass
Lateral Acceleration	-15	15	g's	-4.6	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264	P51681	4/16/2020	10/15/2020
Y Accelerometer	ENDEVCO 7264	P64151	4/16/2020	10/15/2020
Z Accelerometer	ENDEVCO 7264	P52114	4/16/2020	10/15/2020

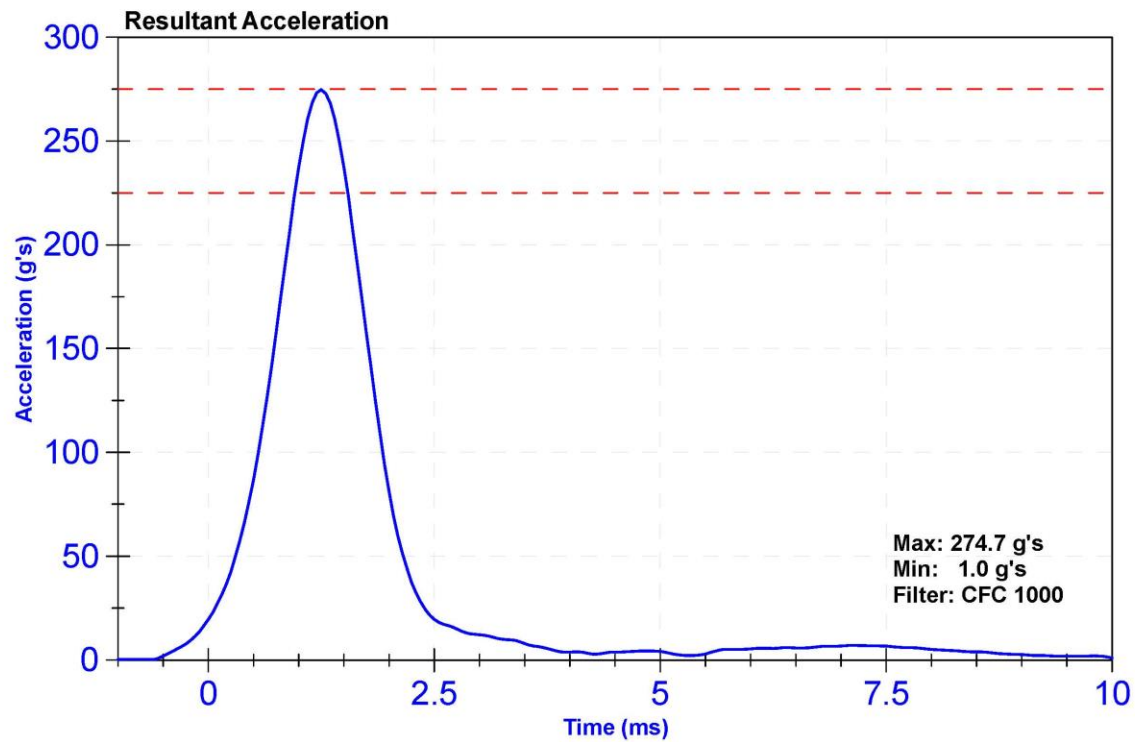

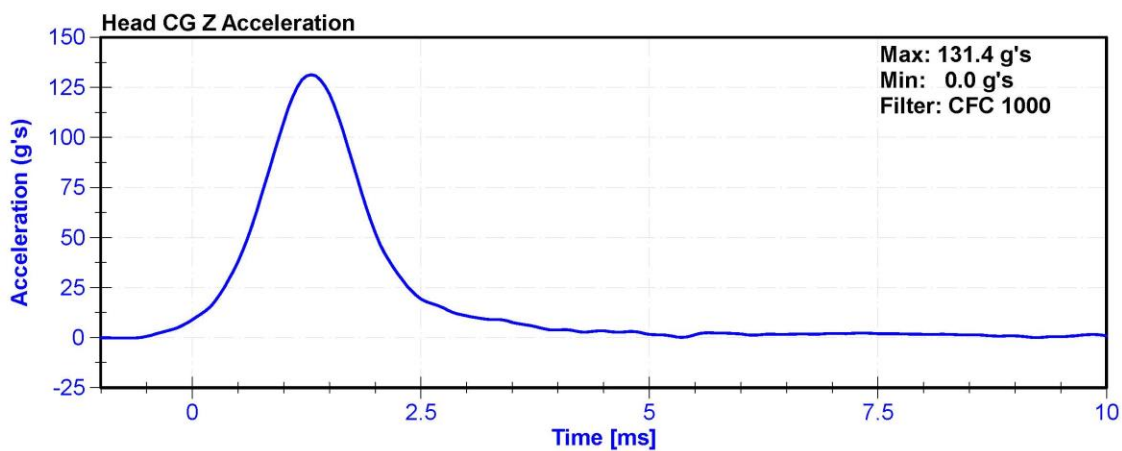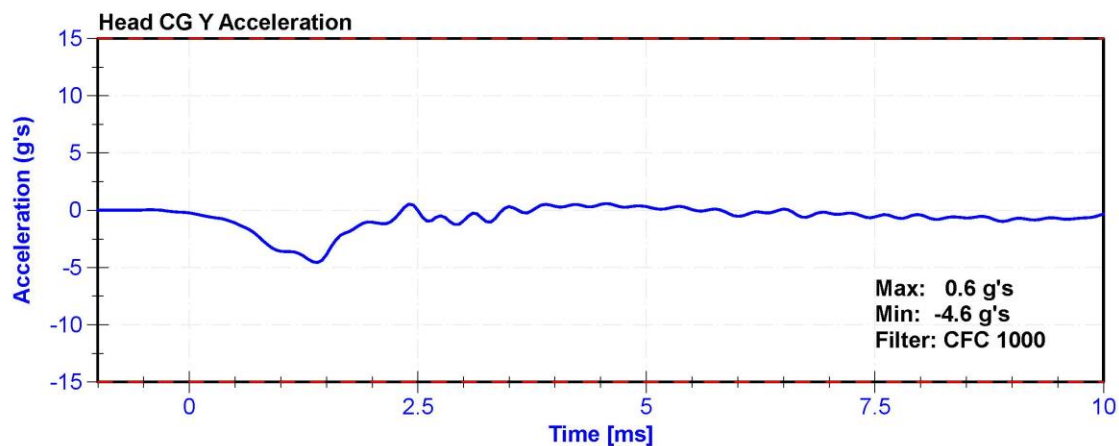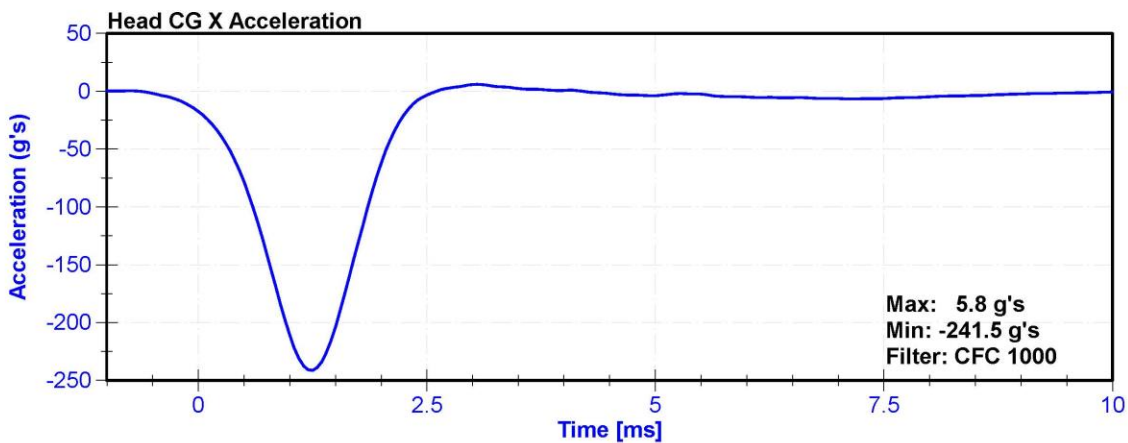



ATD Manufacturer	Humanetics	Test Technician	M. Dudek
ATD Serial Number	142	Laboratory Supervisor	K. Brogan


Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.2	Pass
Humidity	10	70	%	46.5	Pass
Velocity	6.89	7.13	m/s	6.958	Pass
Pendulum Deceleration at 10ms	22.5	27.5	g's	25.12	Pass
Pendulum Deceleration at 20ms	17.6	22.6	g's	22.09	Pass
Pendulum Deceleration at 30ms	12.5	18.5	g's	15.48	Pass
Max. Pendulum Deceleration After 30ms	0	29	g's	25.2	Pass
Pendulum Deceleration Time to 5 g's	34	42	ms	41.8	Pass
Maximum D Plane Rotation	64	78	deg	74.9	Pass
Time to Maximum Rotation	57	64	ms	62.7	Pass
Rotation Decay to Zero	113	127	ms	120.2	Pass
Moment About Occipital Condyle	88.1	108.4	Nm	92.46	Pass
Time to Maximum Moment	47	58	ms	55.2	Pass
Moment Decay to Zero	97	107	ms	104.3	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/6/2020	2/5/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	Denton IF-205	LC-280FxGFE	10/3/2019	10/2/2020

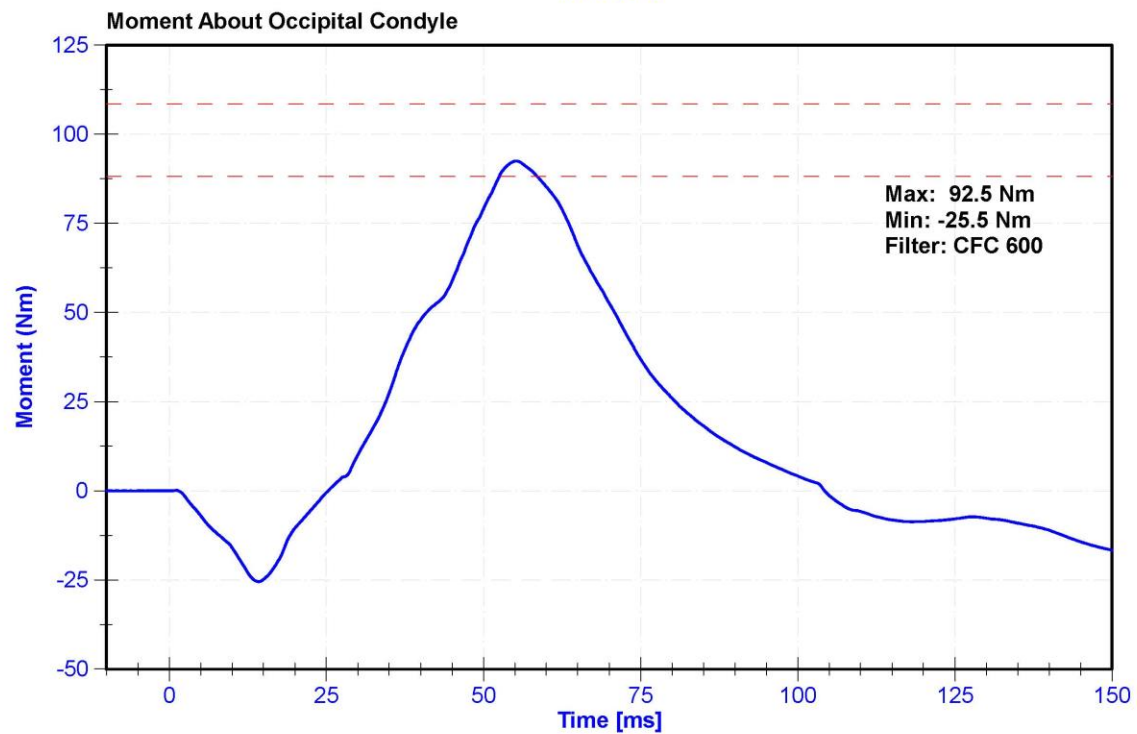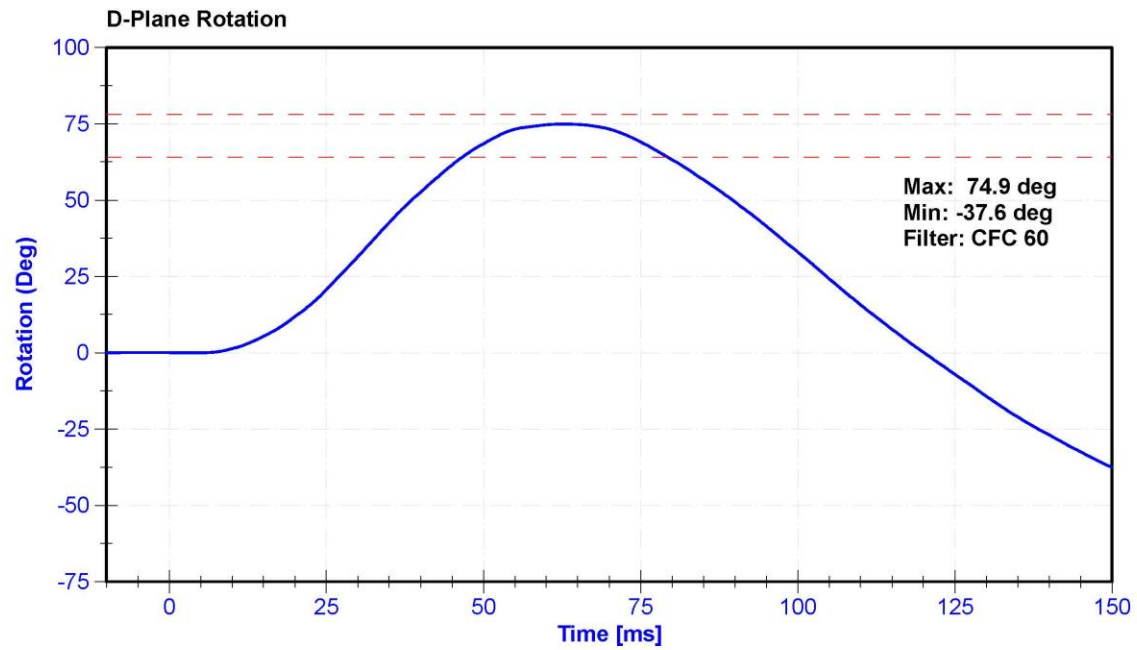

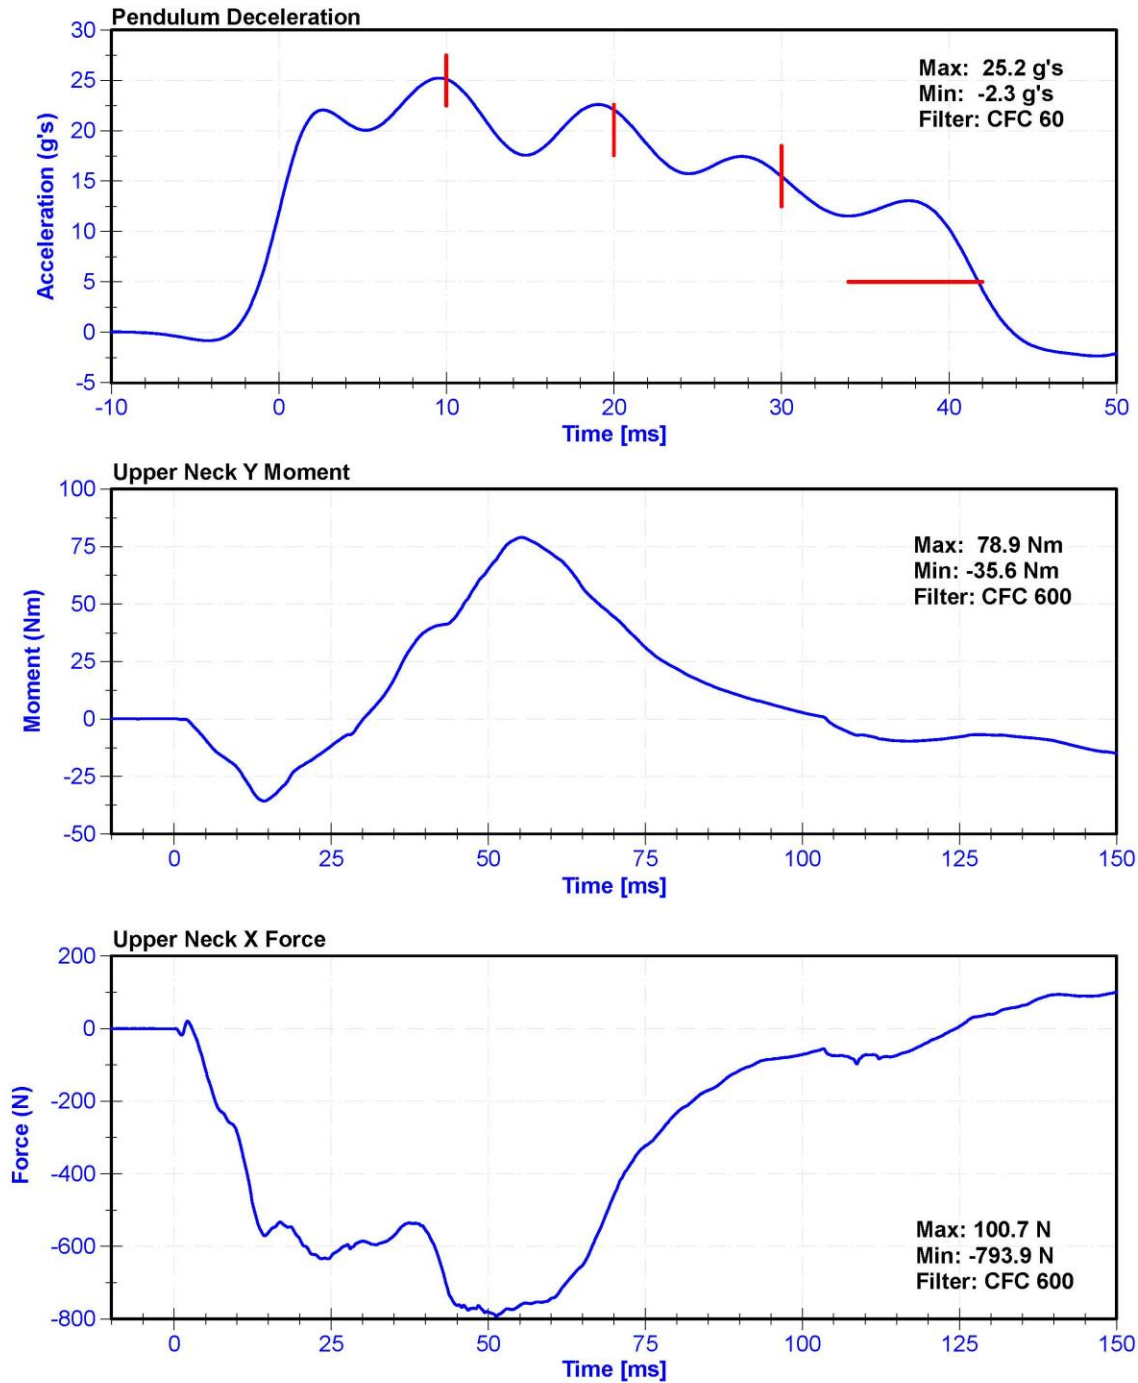



ATD Manufacturer	Humanetics	Test Technician	M. Dudek
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.2	Pass
Humidity	10	70	%	46.5	Pass
Velocity	5.94	6.19	m/s	6.005	Pass
Pendulum Deceleration at 10ms	17.2	21.2	g's	20.58	Pass
Pendulum Deceleration at 20ms	14	19	g's	18.5	Pass
Pendulum Deceleration at 30ms	11	16	g's	14.9	Pass
Max. Pendulum Deceleration After 30ms	0	22	g's	20.6	Pass
Pendulum Deceleration Time to 5 g's	38	46	ms	42.0	Pass
Maximum D Plane Rotation	81	106	deg	98.6	Pass
Time to Maximum Rotation	72	82	ms	77.2	Pass
Rotation Decay to Zero	147	174	ms	157.3	Pass
Minimum Moment About OC	-80	-52.9	Nm	-69.41	Pass
Time to Minimum Moment	65	79	ms	71.5	Pass
Moment Decay to Zero	120	148	ms	140.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C16503 Striker	2/6/2020	2/5/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	Denton IF-205	LC-280FxGFE	10/3/2019	10/2/2020

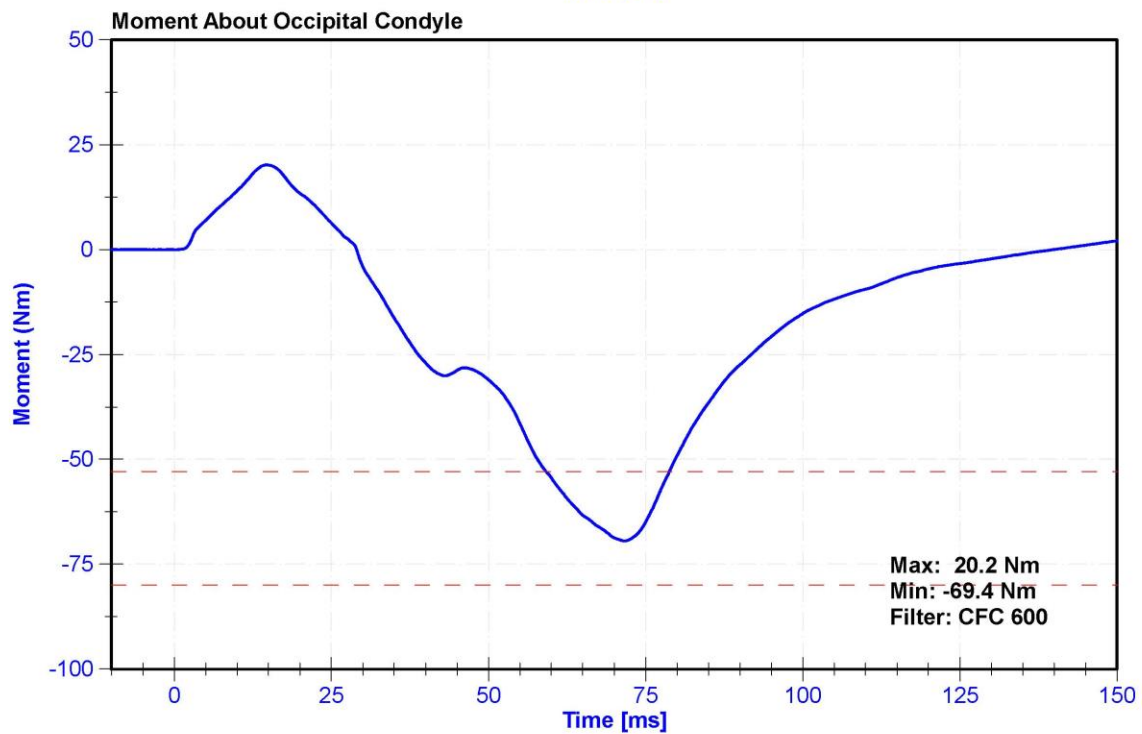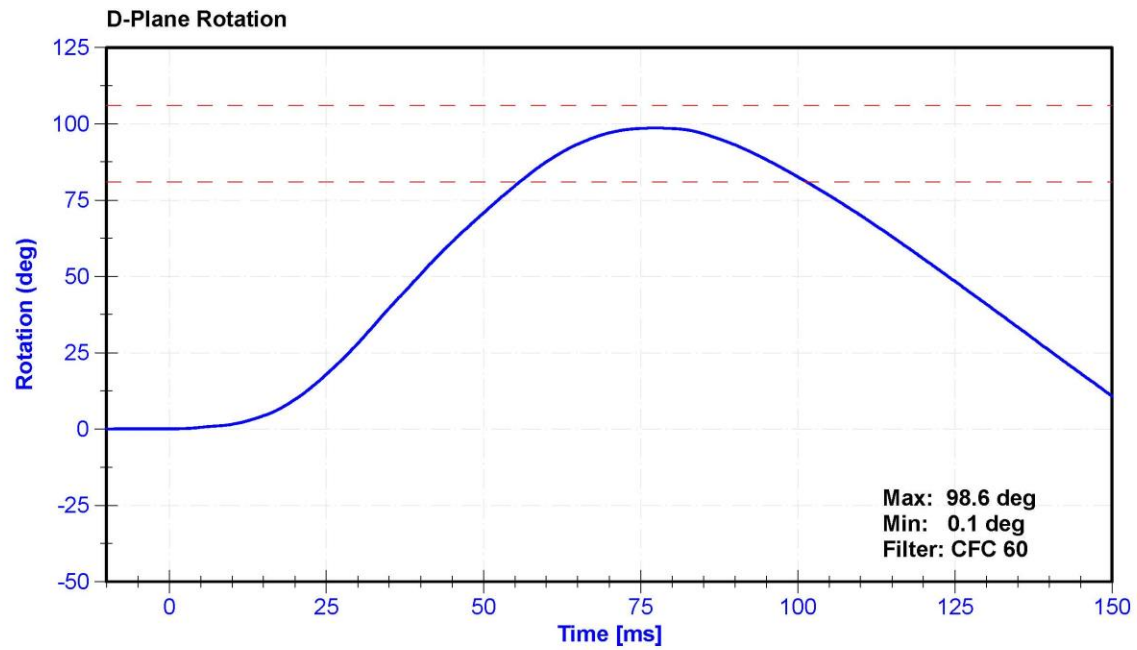

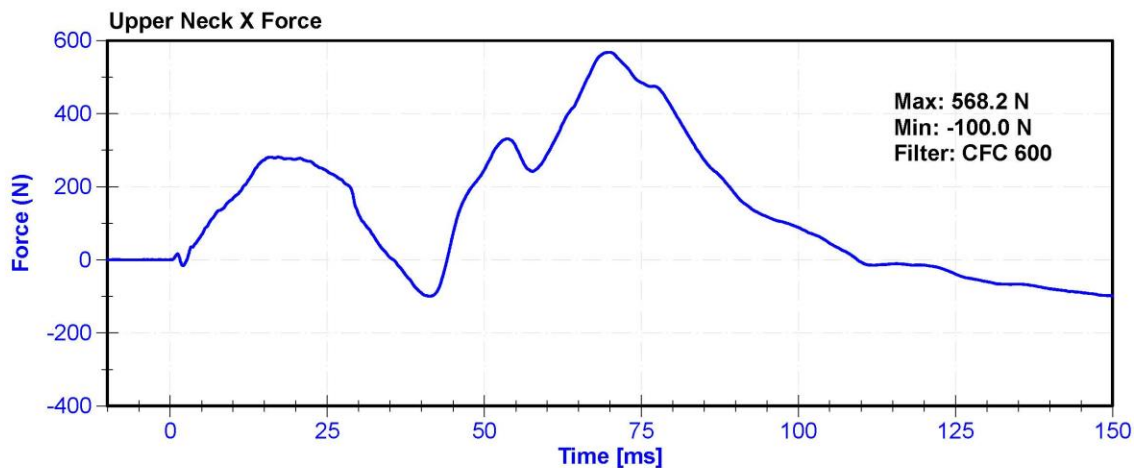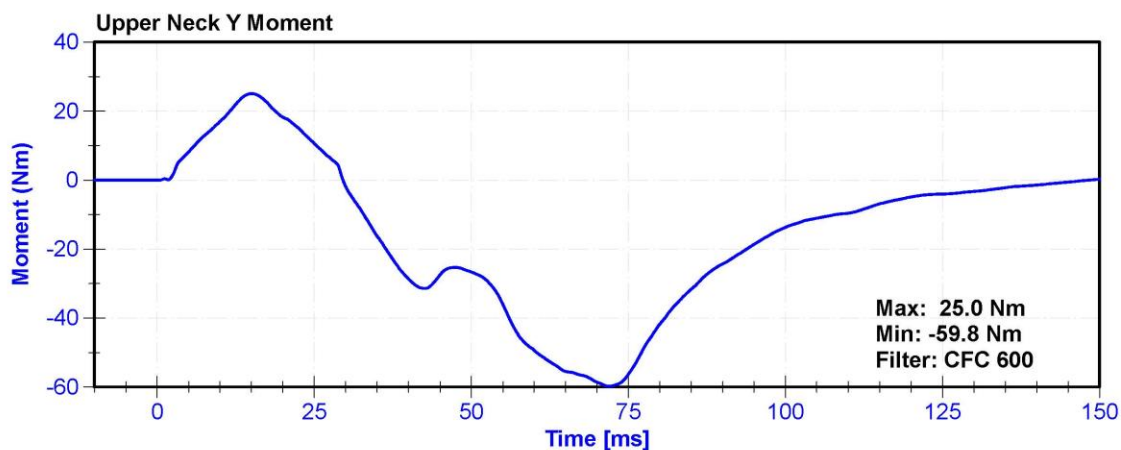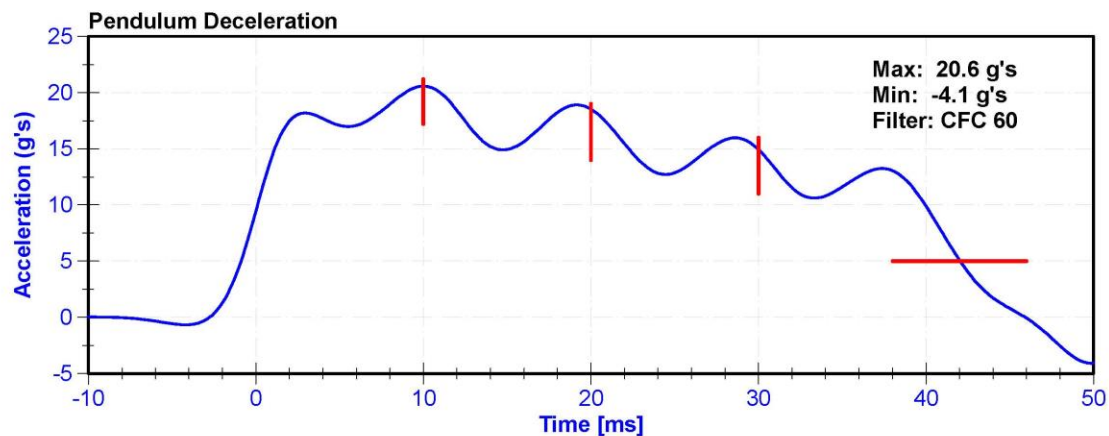


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.6	Pass
Humidity	10	70	%	46.6	Pass
Velocity	6.59	6.83	m/s	6.597	Pass
Chest Displacement	-72.6	-63.5	mm	-70.05	Pass
Resistive Force	5160	5894	N	5619.0	Pass
Hysteresis	65	85	%	69.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	1/29/2020	7/29/2020
Chest Potentiometer	Servo 6209-2038	DS-142	3/27/2020	9/25/2020

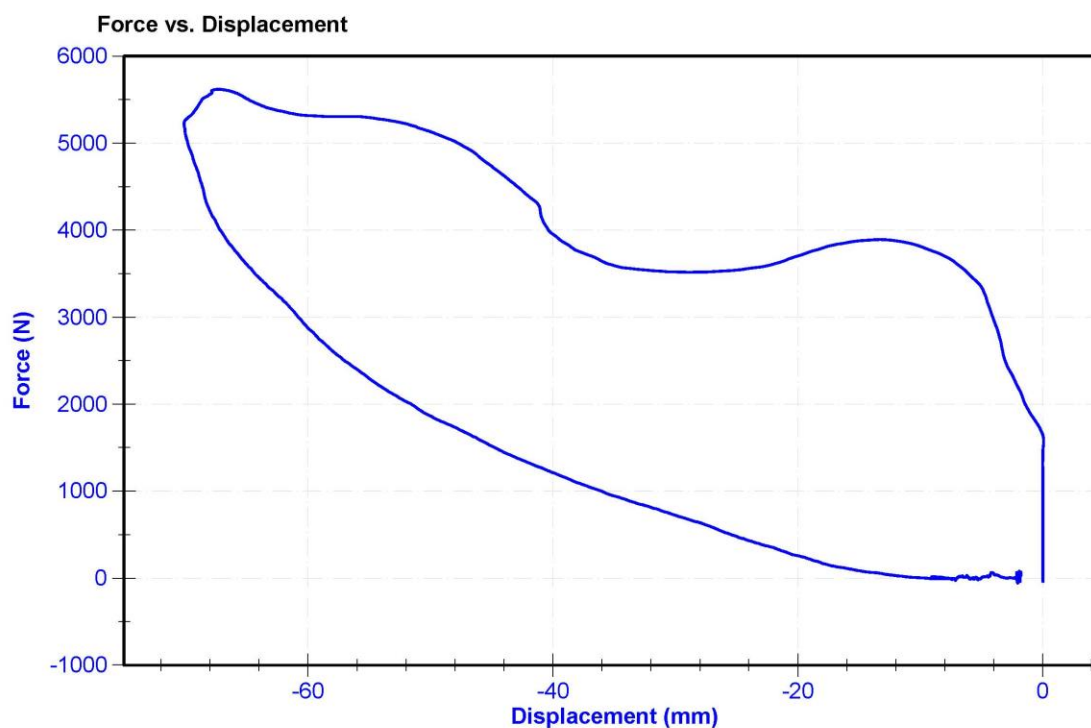

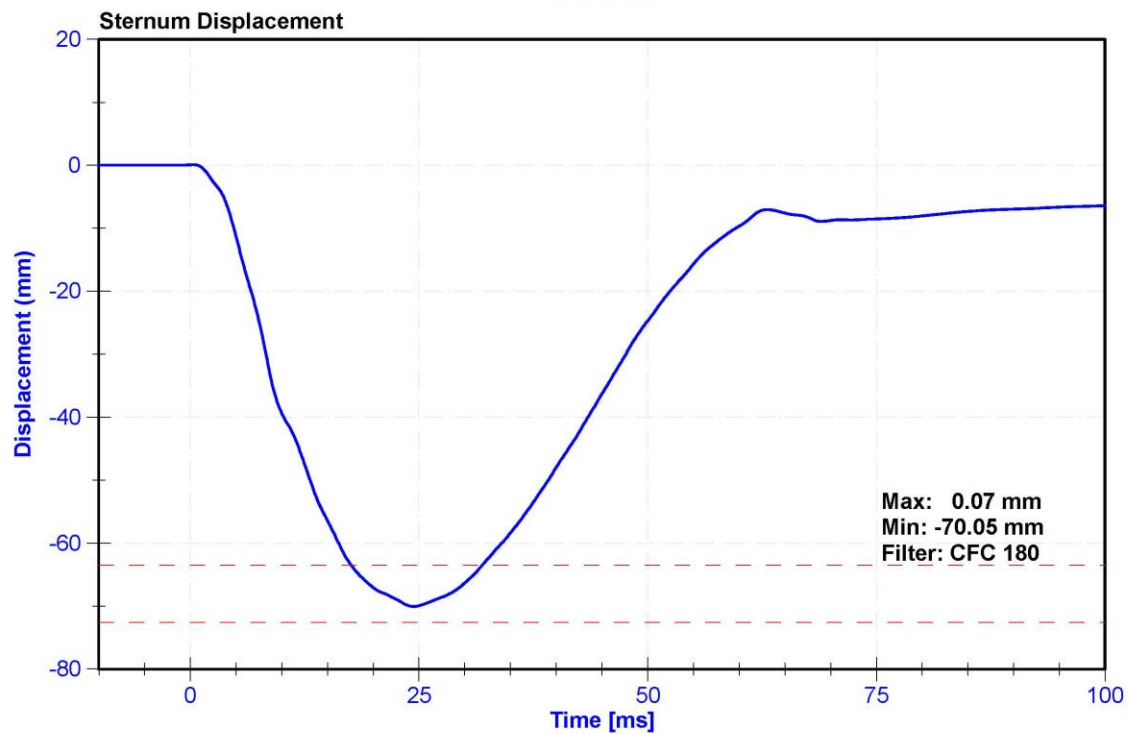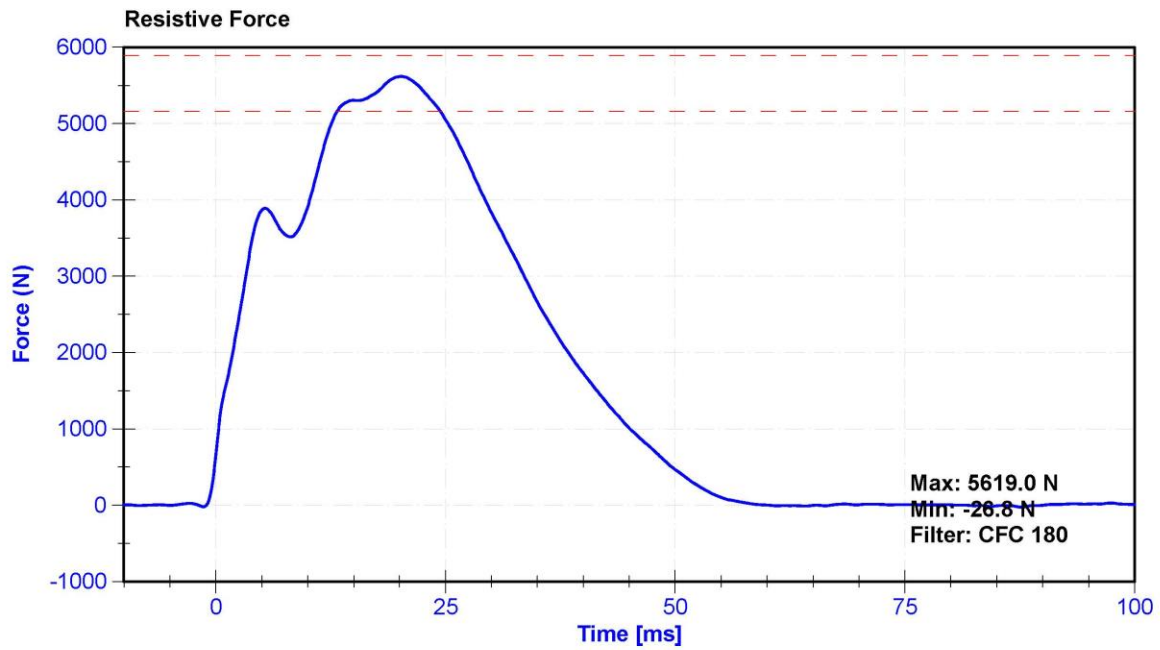

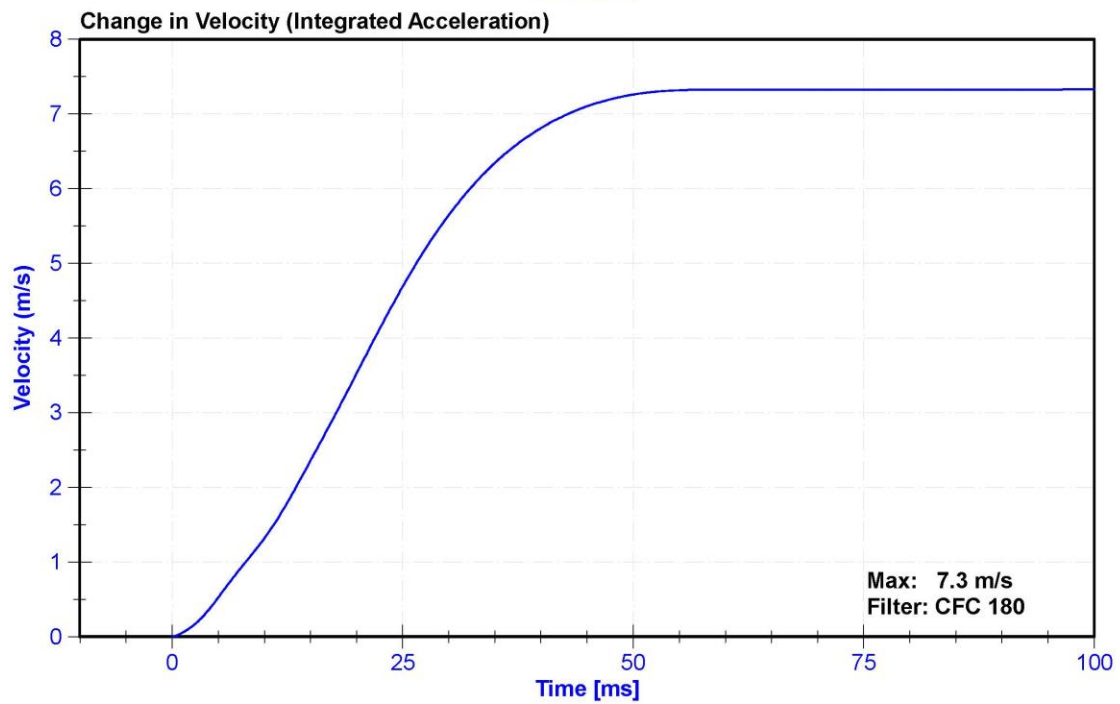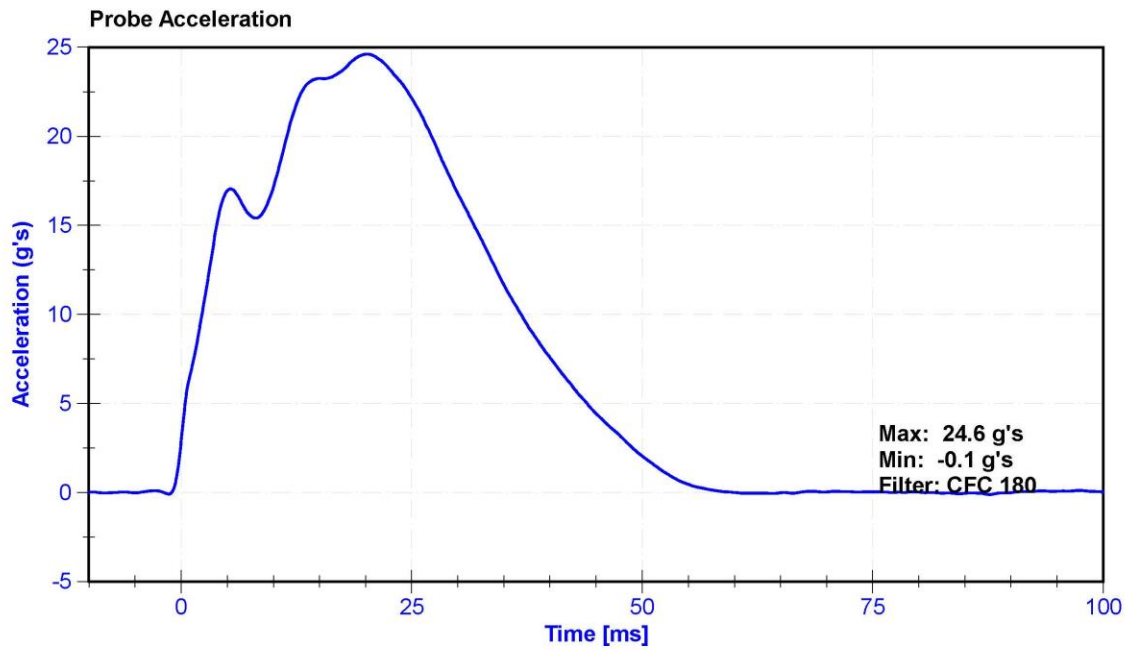


ATD Manufacturer	Humanetics	Test Technician	M. Dudek
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.4	Pass
Humidity	10	70	%	29.2	Pass
Average Velocity	5	10	deg/s	7.0	Pass
Angle at 203Nm	40	50	deg	47.9	Pass
Moment at 30 degrees	0	94.9	Nm	82.8	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	9/18/2019	9/17/2020
Load Cell	Key Trans 2301-02	LC-115 My	9/12/2019	9/11/2020

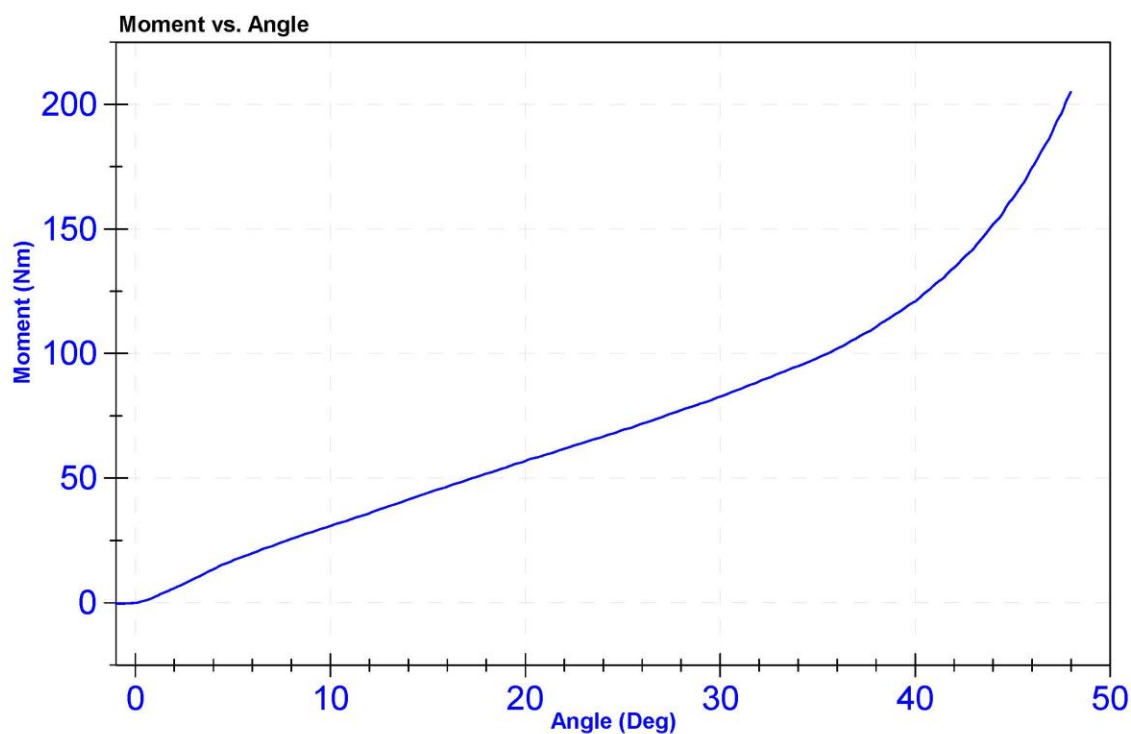


ATD Manufacturer	Humanetics	Test Technician	M. Dudek
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.4	Pass
Humidity	10	70	%	29.2	Pass
Average Velocity	5	10	deg/s	7.0	Pass
Angle at 203Nm	40	50	deg	47.0	Pass
Moment at 30 degrees	0	94.9	Nm	85.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	9/18/2019	9/17/2020
Load Cell	Key Trans 2301-02	LC-115 My	9/12/2019	9/11/2020

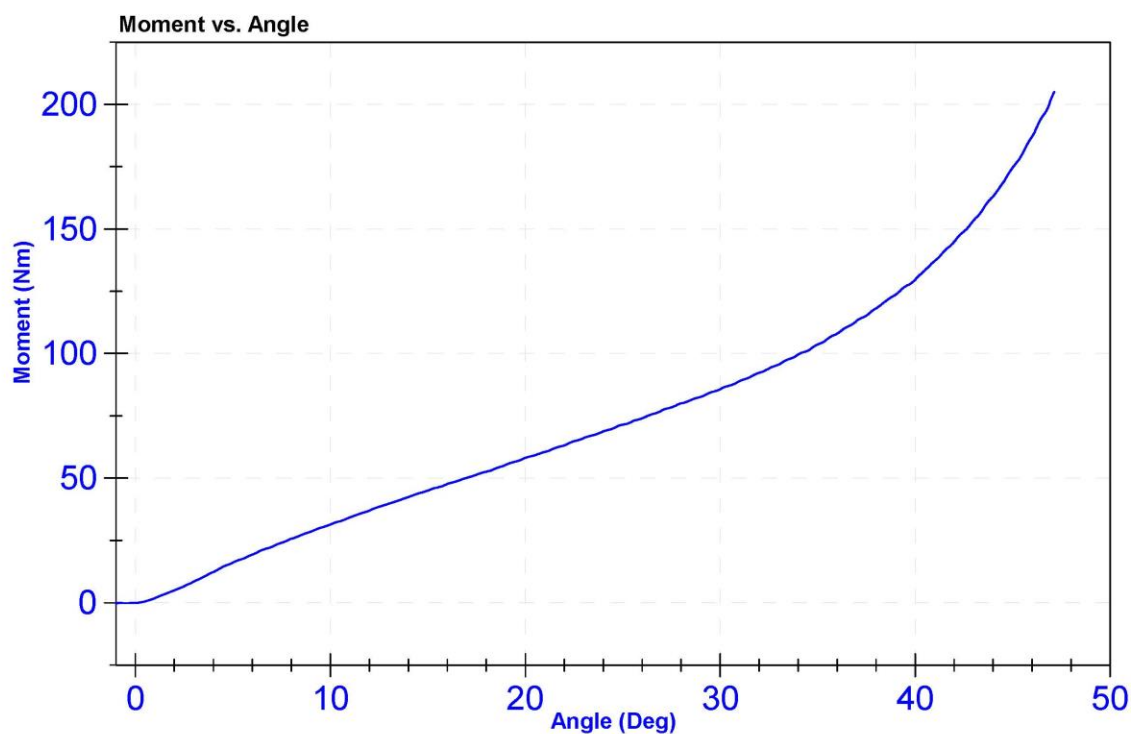


ATD Manufacturer	Humanetics	Test Technician	M. Dudek
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.2	Pass
Humidity	10	70	%	31.3	Pass
Velocity	2.07	2.13	m/s	2.081	Pass
Maximum Resistive Force	4720	5780	N	5494.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	1/29/2020	7/29/2020

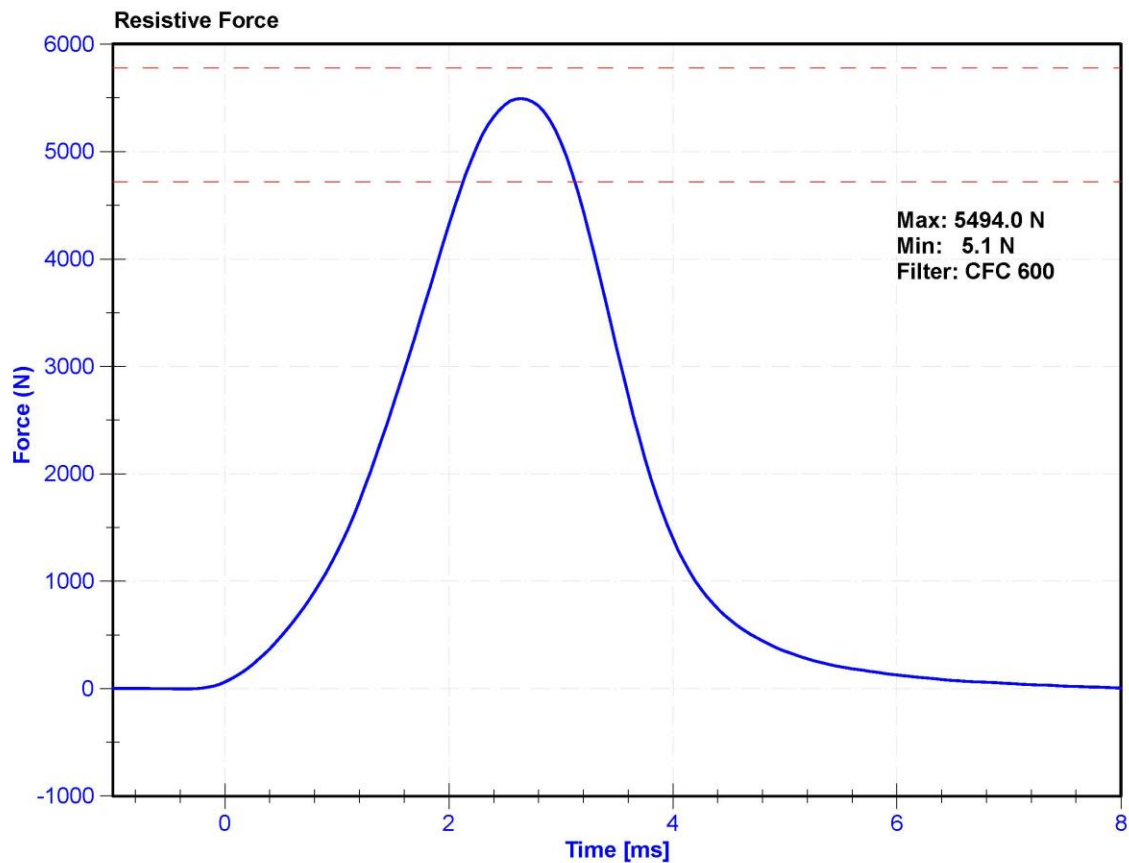

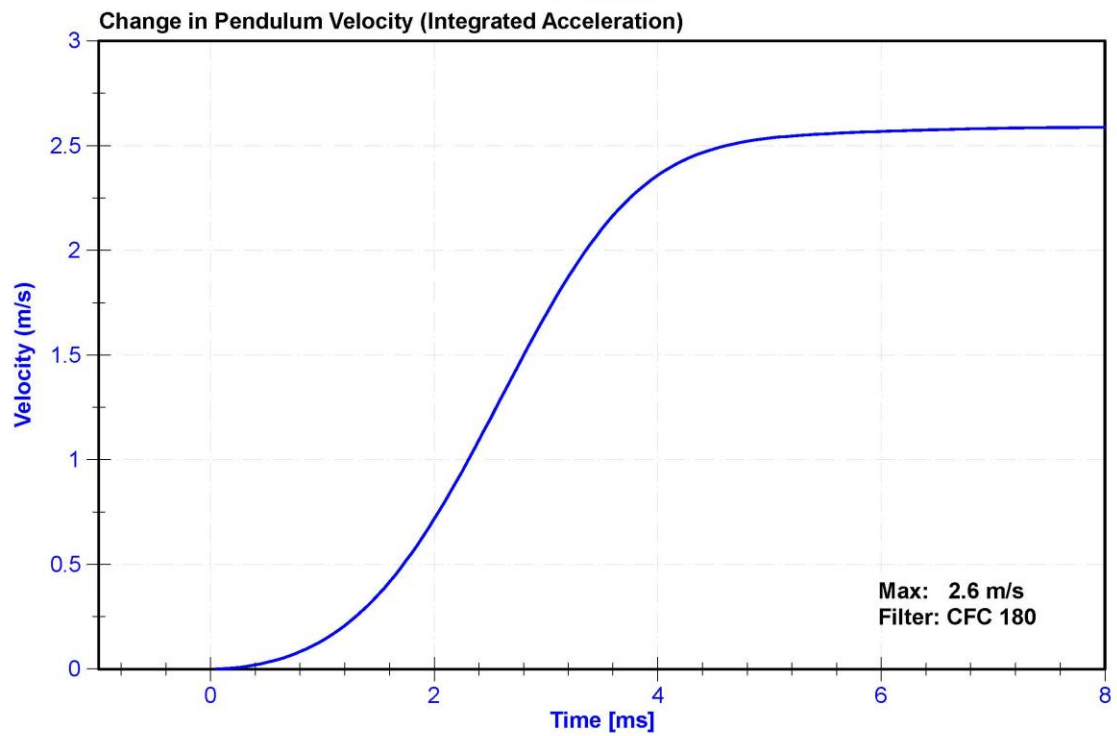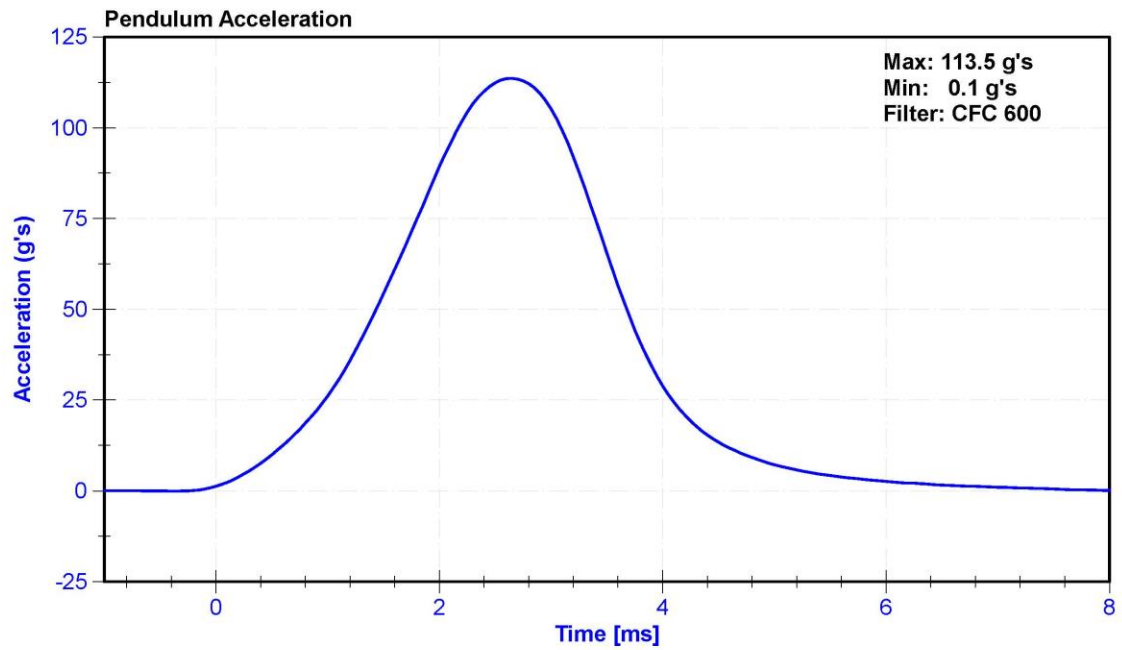


ATD Manufacturer	Humanetics	Test Technician	M. Dudek
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.1	Pass
Humidity	10	70	%	31.3	Pass
Velocity	2.07	2.13	m/s	2.078	Pass
Maximum Resistive Force	4720	5780	N	5259.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	1/29/2020	7/29/2020

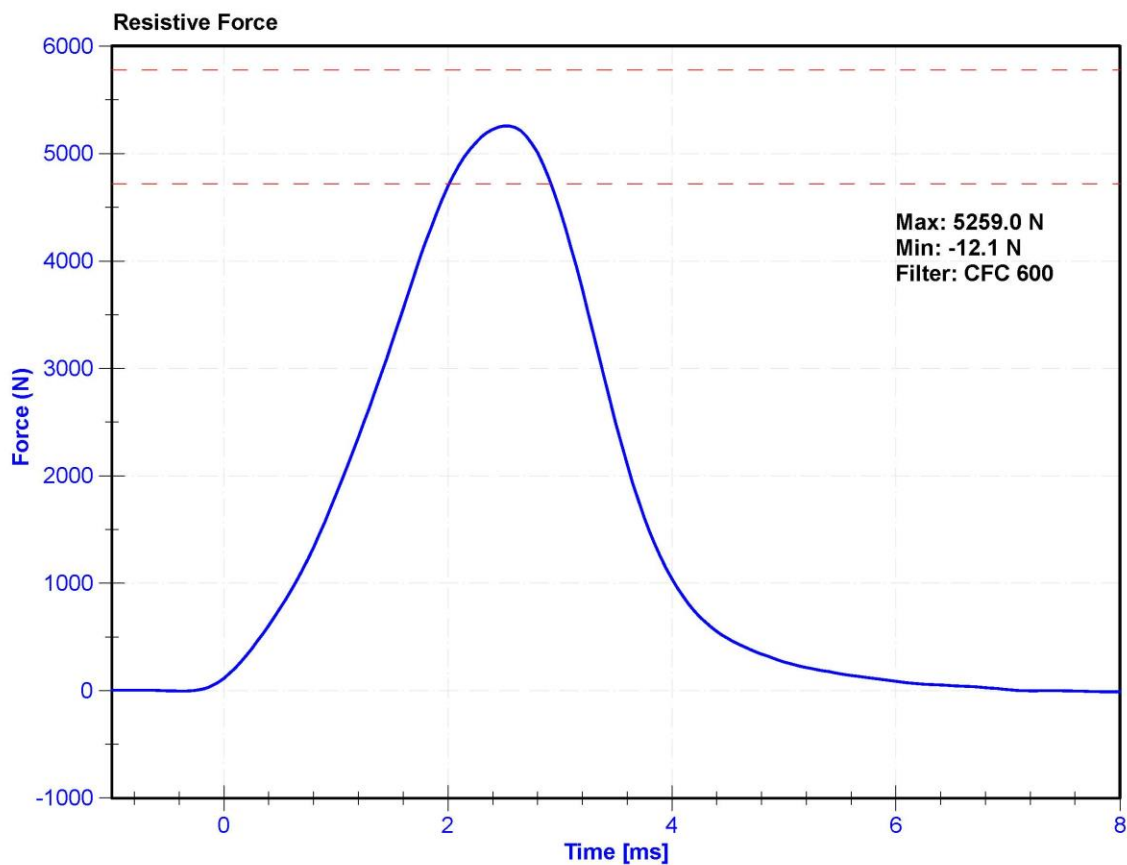

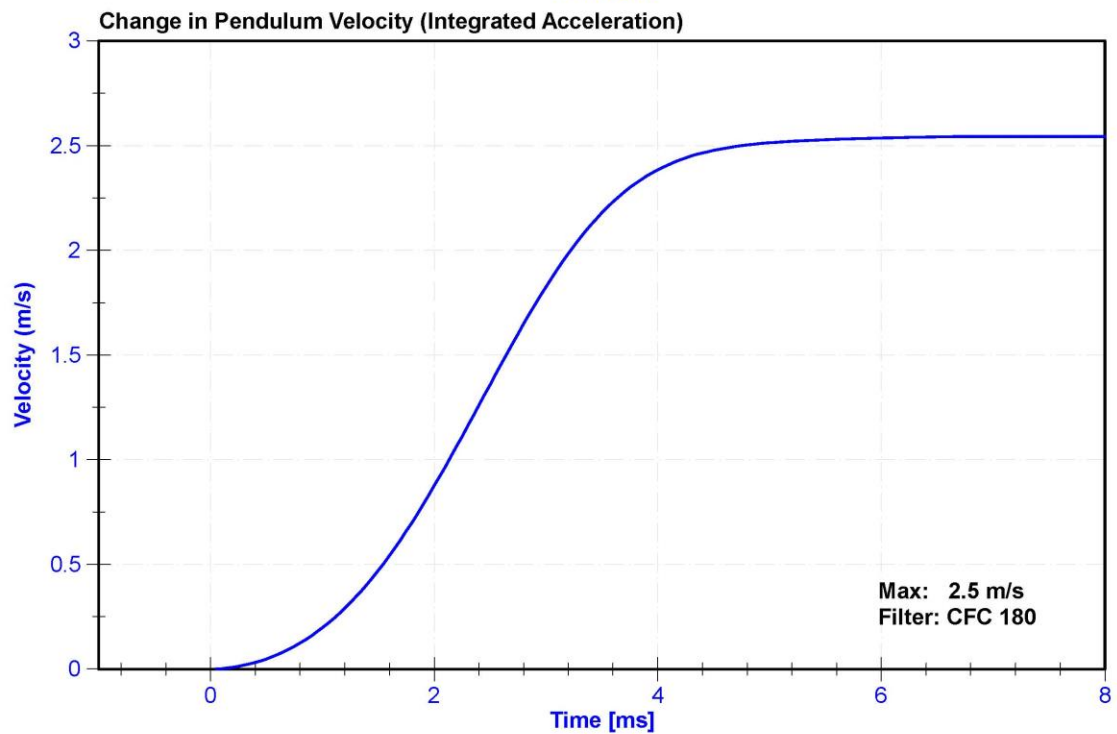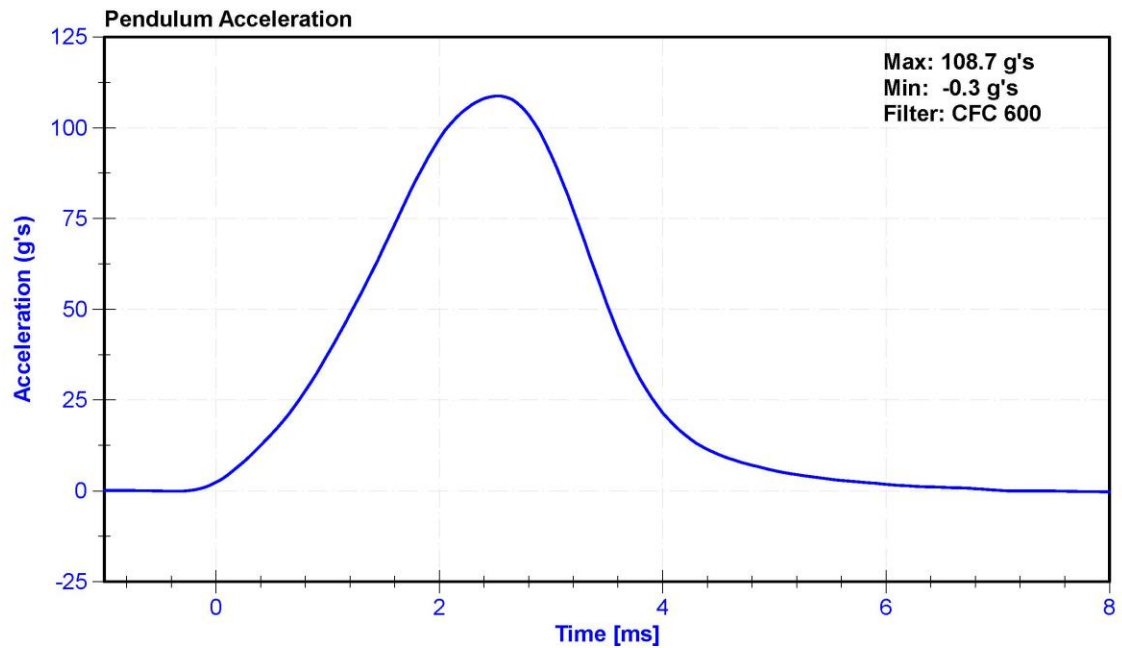

CALIBRATION TEST RESULTS

PRE-TEST

HYBRID III 5TH PERCENTILE - PASSENGER ATD

SERIAL NO: 139





External Measurements - Hybrid 3 - 5th Female

Technician: K. Brogan

Date: 04/17/2020

Dummy Serial Number: 139

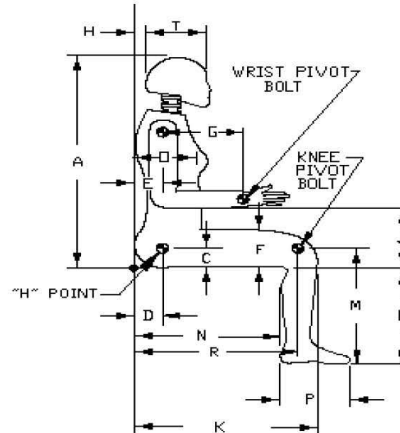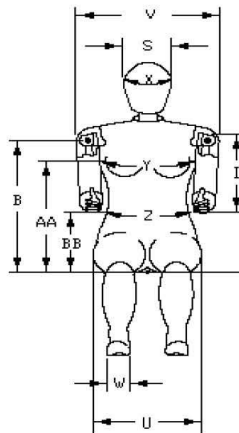

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	775	800	791	Pass
B	Shoulder Pivot Height	432	457	447	Pass
C	H-Point Height	81	86	84	Pass
D	H-Point from Backline	145	150	146	Pass
E	Shoulder Pivot from Backline	69	84	78	Pass
F	Thigh Clearance	119	135	125	Pass
G	Back of Elbow to Wrist Pivot	244	259	254	Pass
H	Head Back to Backline	43	48	45	Pass
I	Shoulder to Elbow Length	277	297	289	Pass
J	Elbow Rest Height	183	203	190	Pass
K	Buttock to Knee Length	521	546	541	Pass
L	Popliteal Height	356	376	363	Pass
M	Knee Pivot Height	394	419	402	Pass
N	Buttock Popliteal Length	414	439	426	Pass
O	Chest Depth without Jacket	175	191	185	Pass
P	Foot Length (right)	219	234	225	Pass
R	Buttock To Knee Pivot Length	457	483	473	Pass
S	Head Breadth	137	147	143	Pass
T	Head Depth	178	188	182	Pass
U	Hip Breadth	300	315	310	Pass
V	Shoulder Breadth	351	366	362	Pass
W	Foot Breadth	79	94	87	Pass
X	Head Circumference	528	549	535	Pass
Y	Chest Circumference with Jacket	851	881	861	Pass
Z	Waist Circumference	460	790	773	Pass
AA	Reference Location (Chest Circumference)	333	358	345	Pass
BB	Reference Location (Waist Circumference)	160	170	165	Pass


ATD Manufacturer	Denton	Test Technician	M. Dudek
ATD Serial Number	139	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.6	Pass
Humidity	10	70	%	23.8	Pass
Resultant Acceleration	250	300	g's	258.4	Pass
Oscillation	0	10	%	2.7	Pass
Lateral Acceleration	-15	15	g's	8.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P58998	4/17/2020	10/16/2020
Y Accelerometer	ENDEVCO 7264	AC-P83320	4/17/2020	10/16/2020
Z Accelerometer	ENDEVCO 7264CT	AC-P58997	4/17/2020	10/16/2020

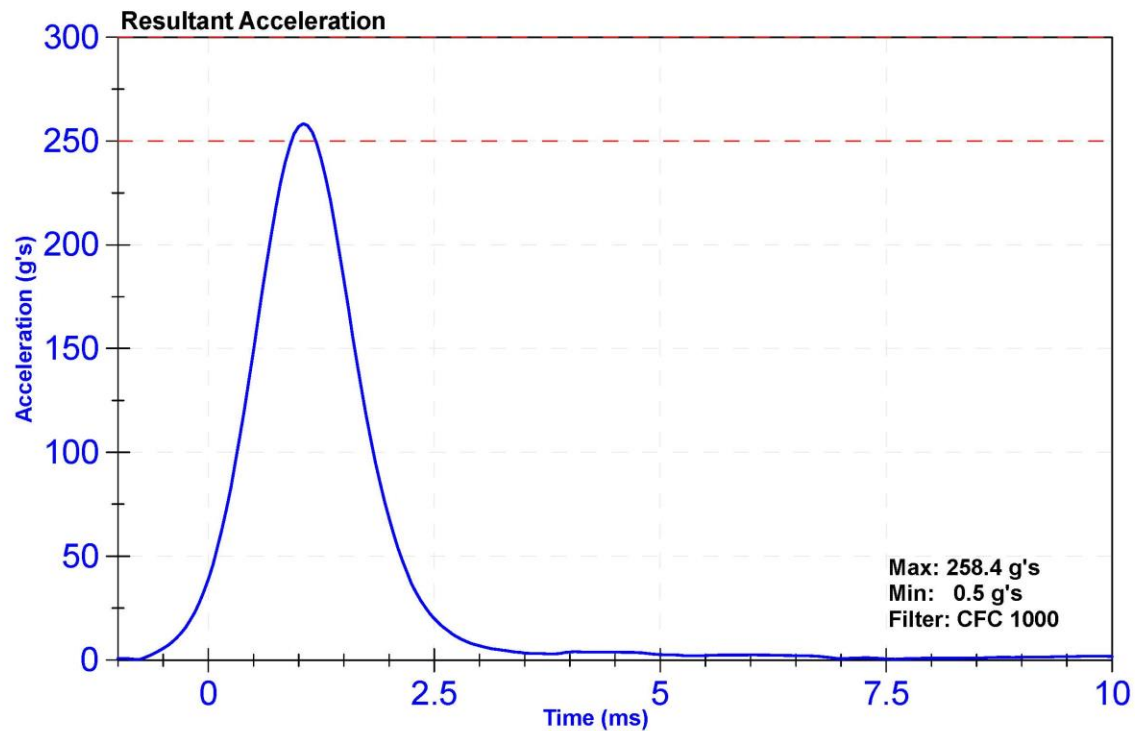

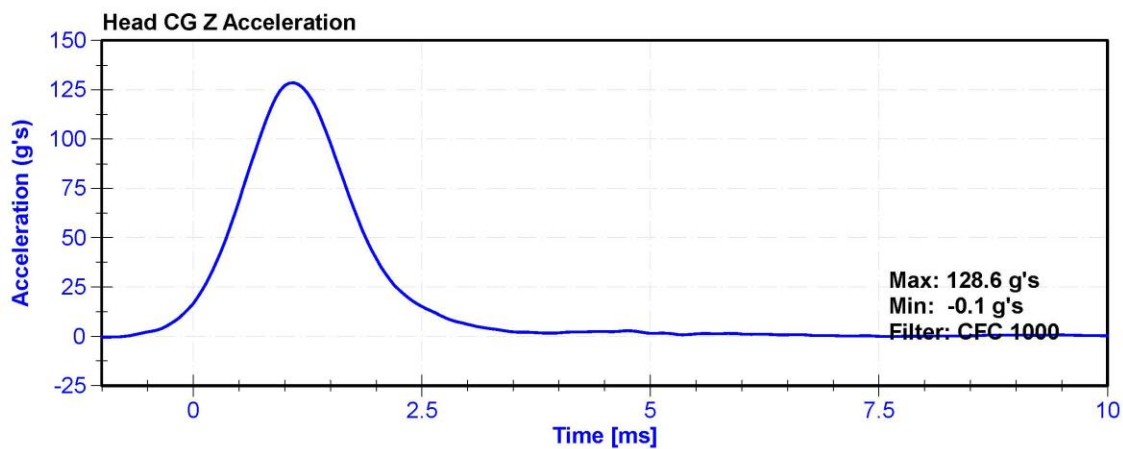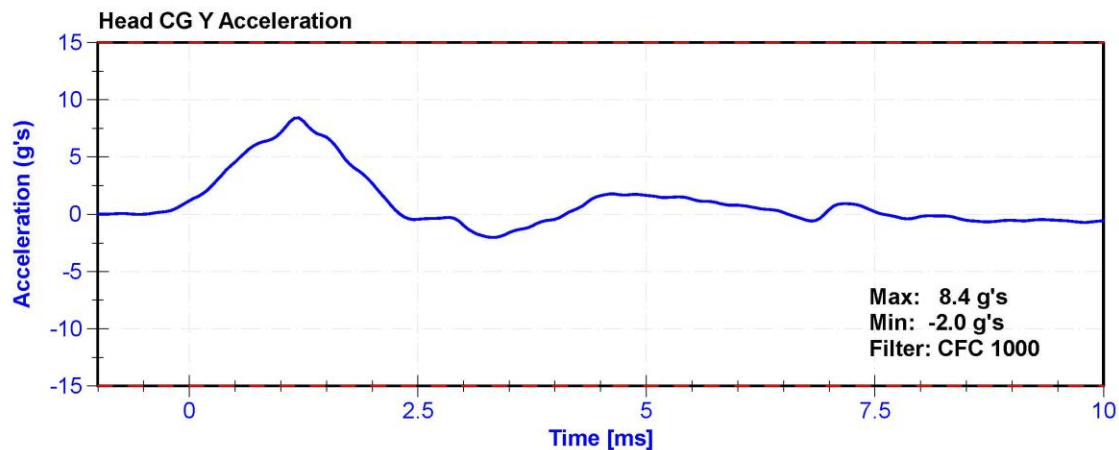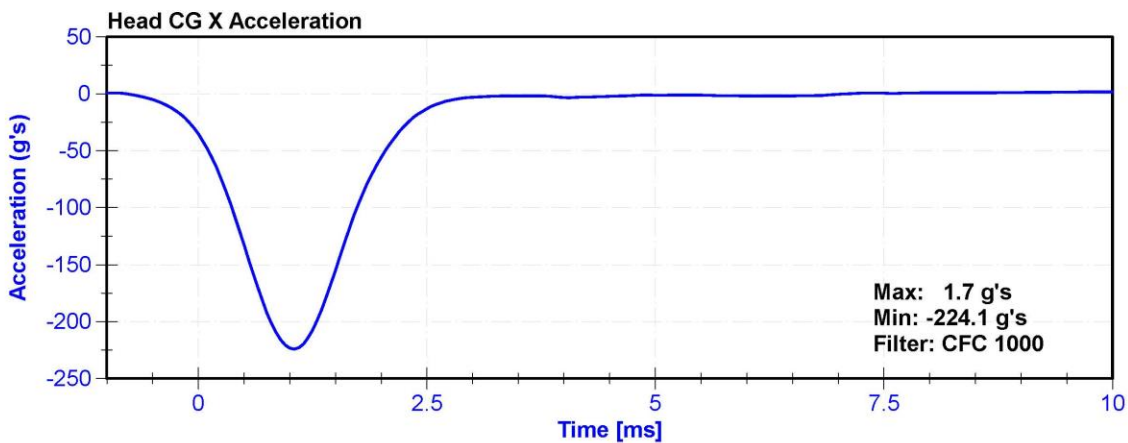


ATD Manufacturer	Denton	Test Technician	C. Mantell
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



Results




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.0	Pass
Humidity	10	70	%	33.0	Pass
Velocity	6.89	7.13	m/s	6.903	Pass
Pendulum Impulse at 10ms	2.1	2.5	m/s	2.31	Pass
Pendulum Impulse at 20ms	4.0	5.0	m/s	4.64	Pass
Pendulum Impulse at 30ms	5.8	7.0	m/s	6.61	Pass
Max D Plane Rotation	77	91	deg	87.6	Pass
Max Moment During Rotation Interval	69	83	Nm	73.4	Pass
Moment Decay to 10.0 Nm	80	100	ms	84.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/30/2020	1/29/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	Denton 1716A	LC-1916Fx	10/3/2019	10/2/2020

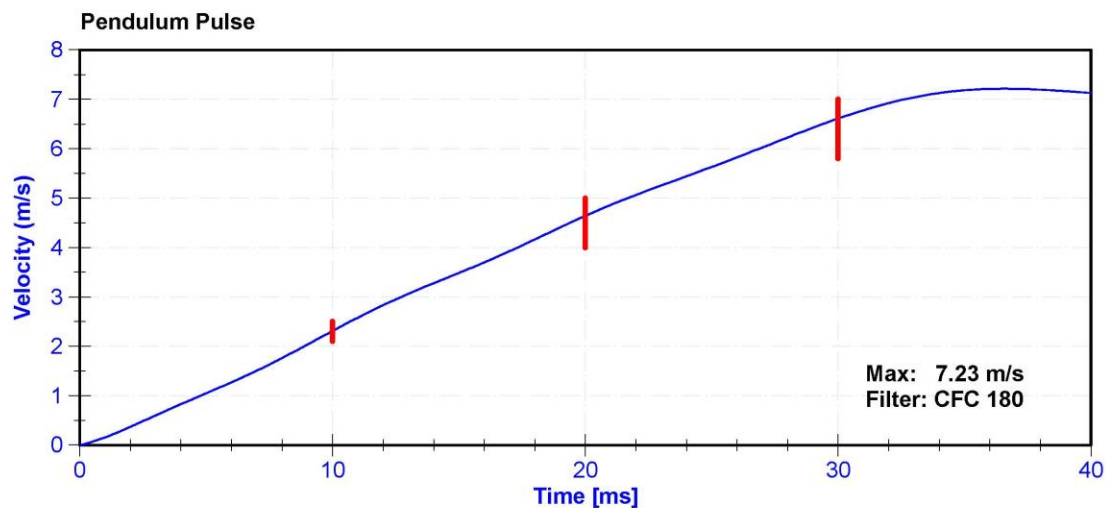

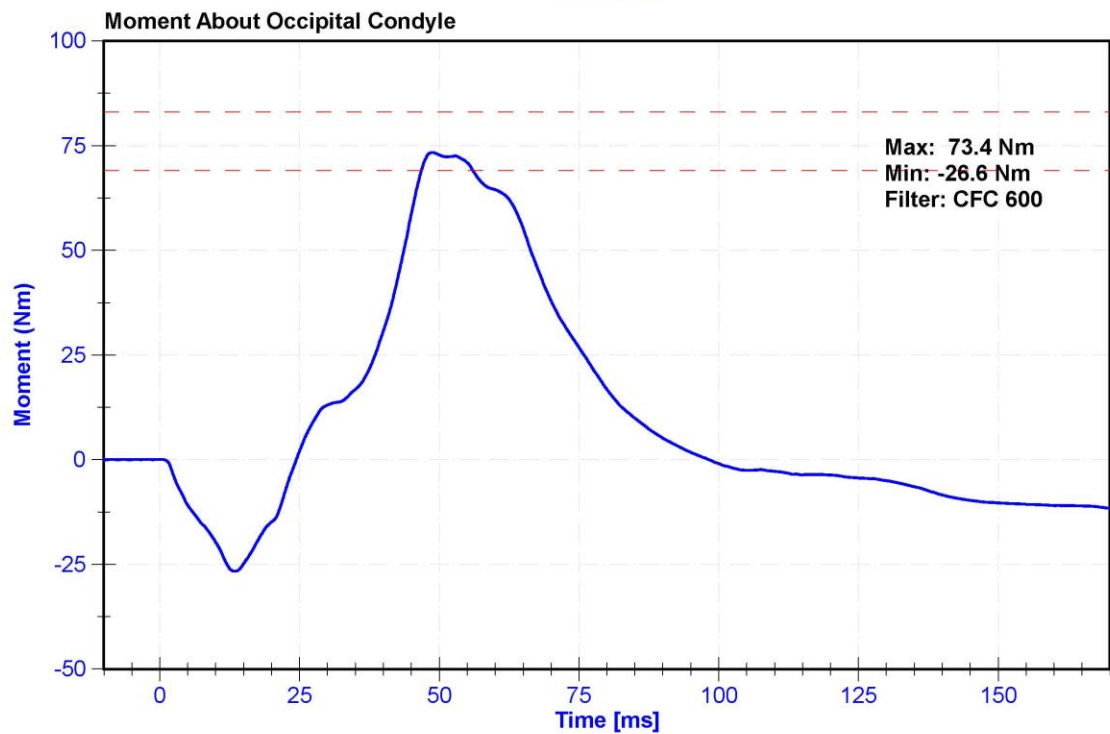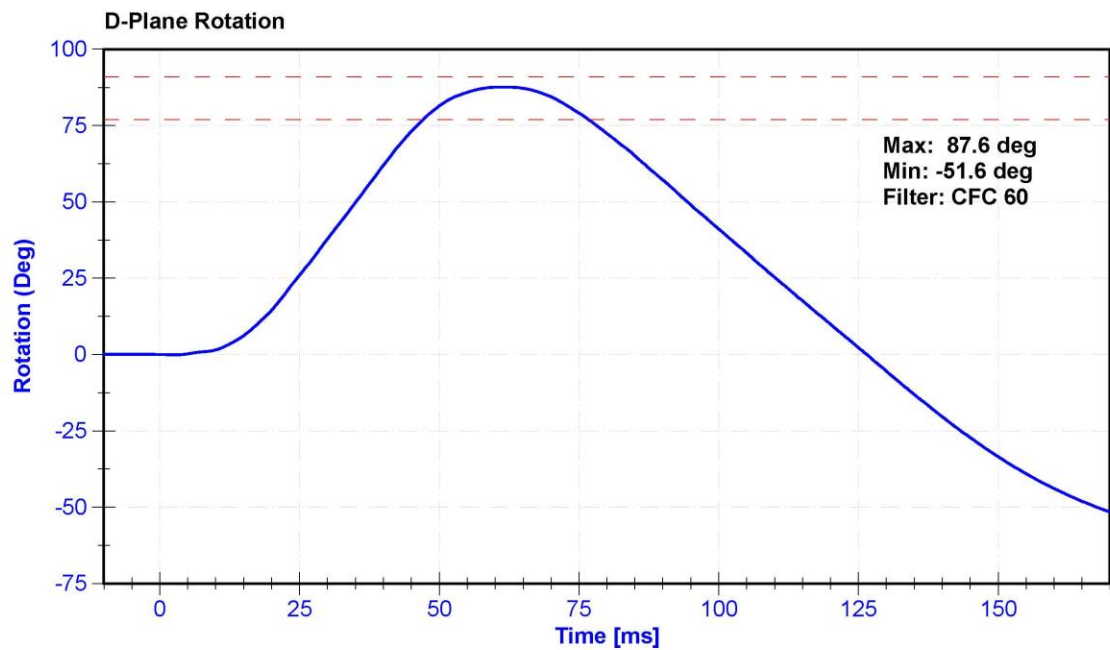

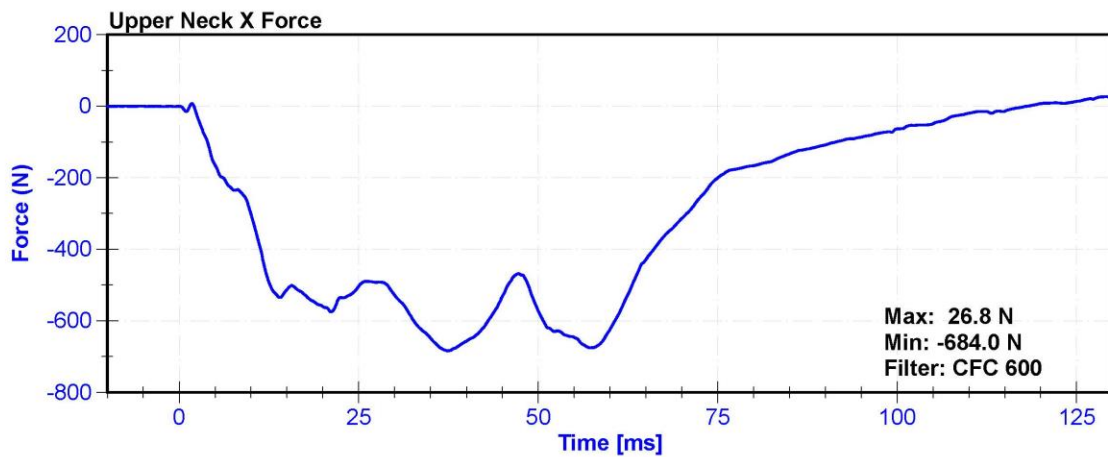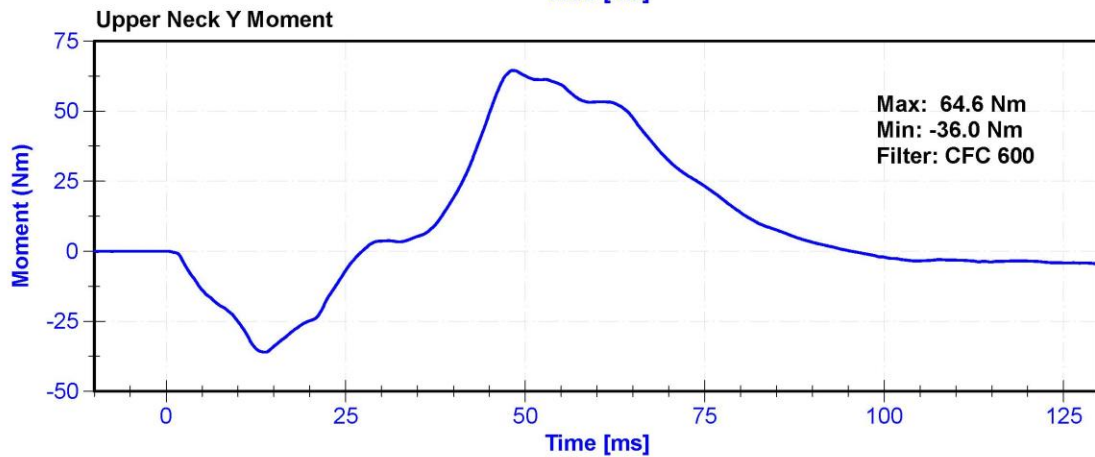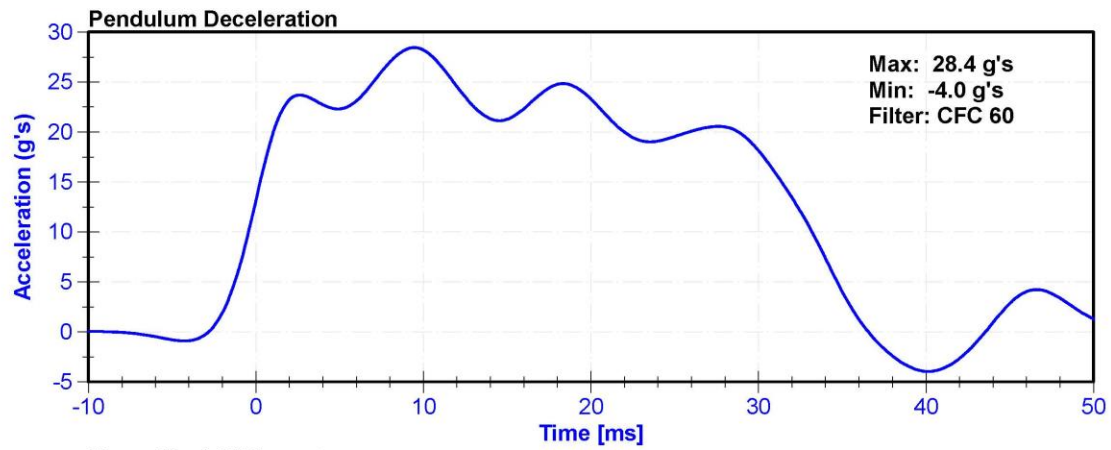


ATD Manufacturer	Denton	Test Technician	C. Mantell
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



Results


Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.9	Pass
Humidity	10	70	%	32.8	Pass
Velocity	5.95	6.19	m/s	6.046	Pass
Pendulum Impulse at 10ms	1.5	1.9	m/s	1.59	Pass
Pendulum Impulse at 20ms	3.1	3.9	m/s	3.30	Pass
Pendulum Impulse at 30ms	4.6	5.6	m/s	4.94	Pass
D Plane Rotation	99	114	deg	110.0	Pass
Moment During Rotation Interval	-65	-53	Nm	-59.8	Pass
Moment Decay to -10Nm	94	114	ms	102.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/30/2020	1/29/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	Denton 1716A	LC-1916Fx	10/3/2019	10/2/2020

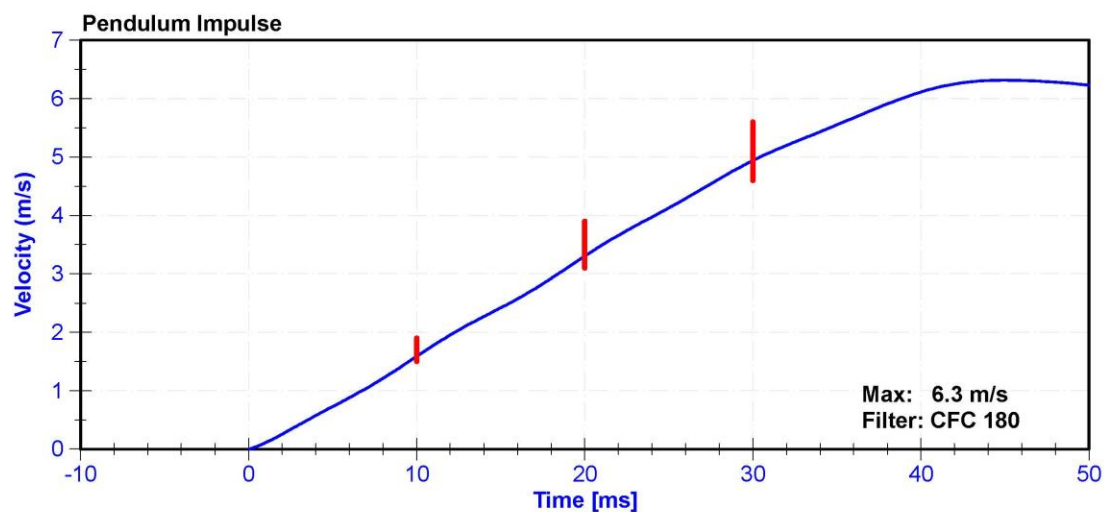

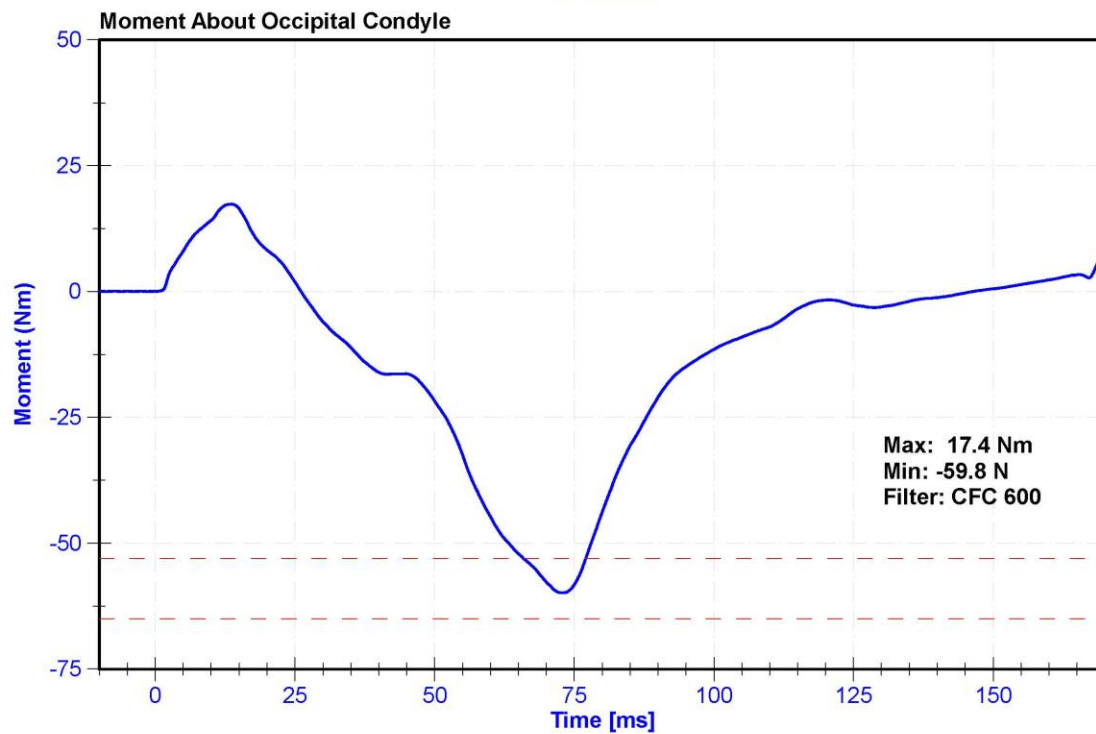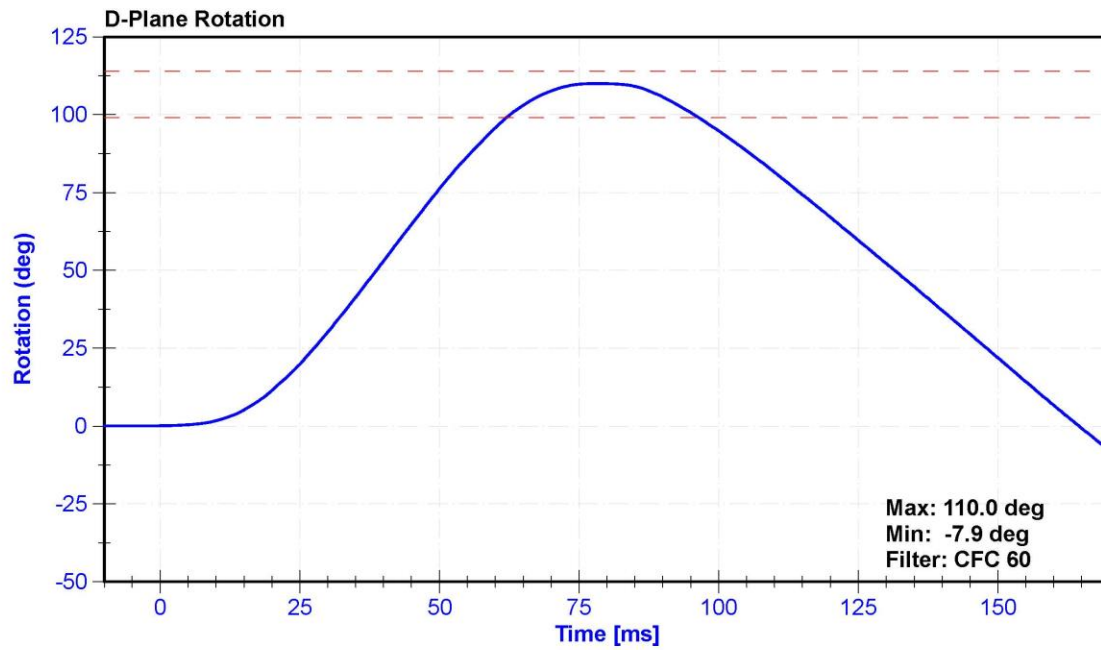

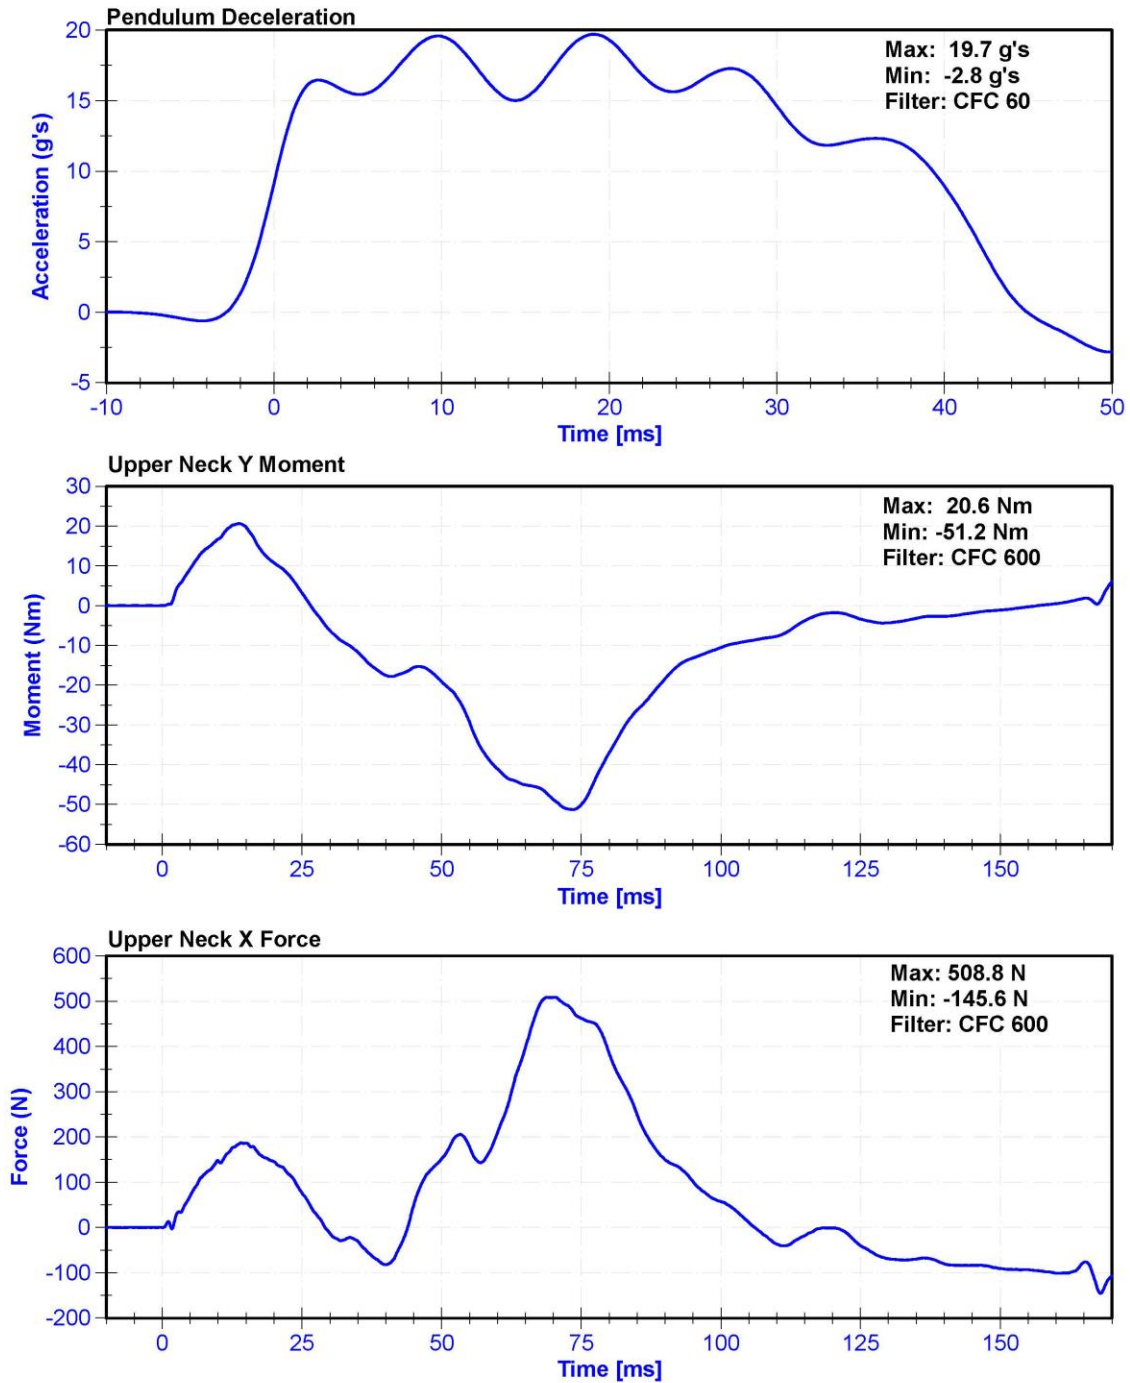


ATD Manufacturer	Denton	Test Technician	D.Reinhard
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	28.2	Pass
Velocity	6.59	6.83	m/s	6.804	Pass
Chest Deflection	-58	-50	mm	-56.0	Pass
Maximum Resistive Force (50 to 58mm)	3900	4400	N	4396.7	Pass
Maximum Resistive Force (18 to 50mm)	0	4600	N	4124.1	Pass
Hysteresis	69	85	%	69.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	1/29/2020	7/29/2020
Chest Potentiometer	SERVO 14CB1-2897	DS-288GFE	4/17/2020	10/16/2020

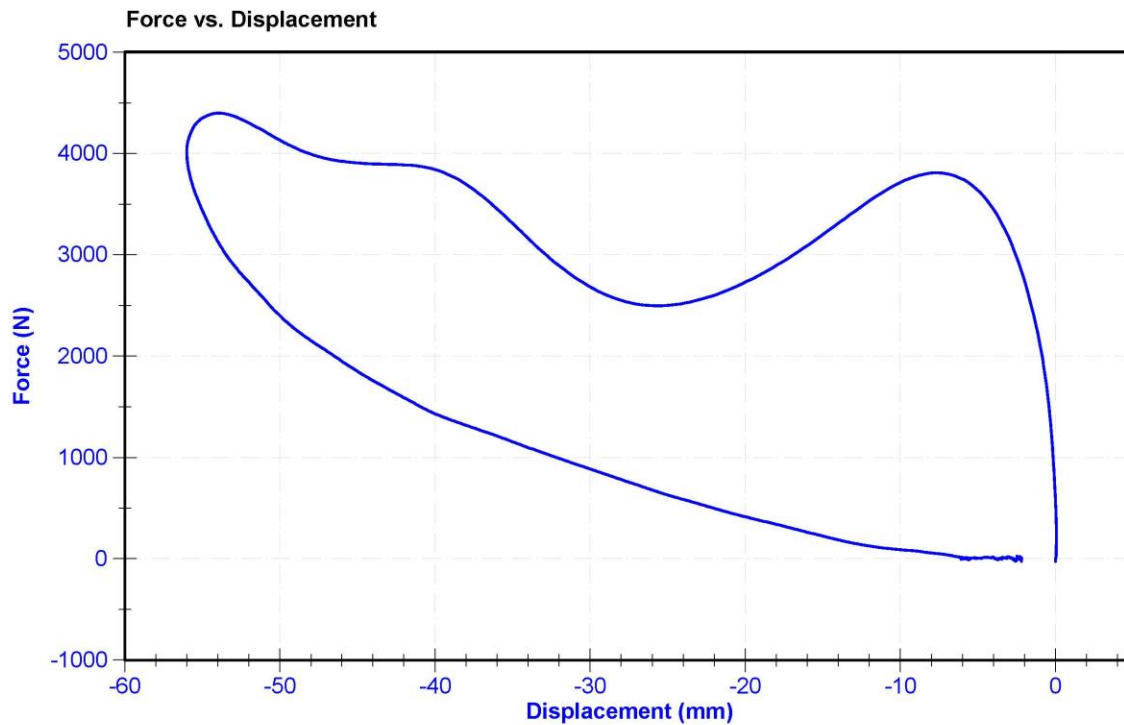

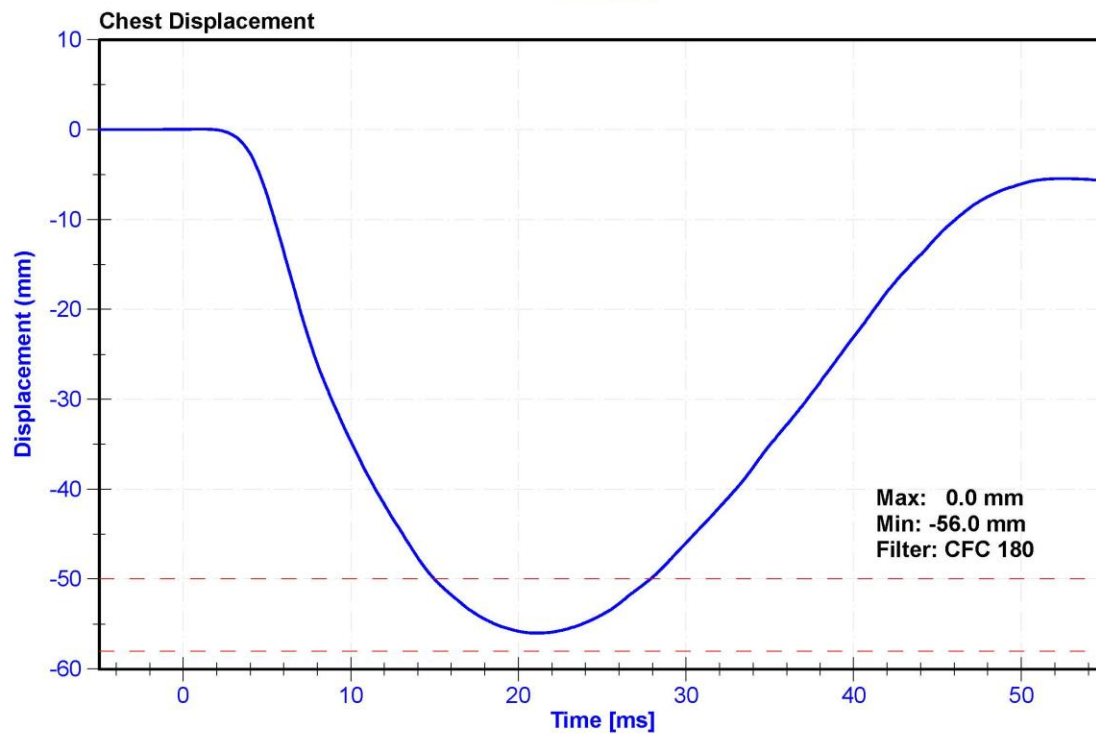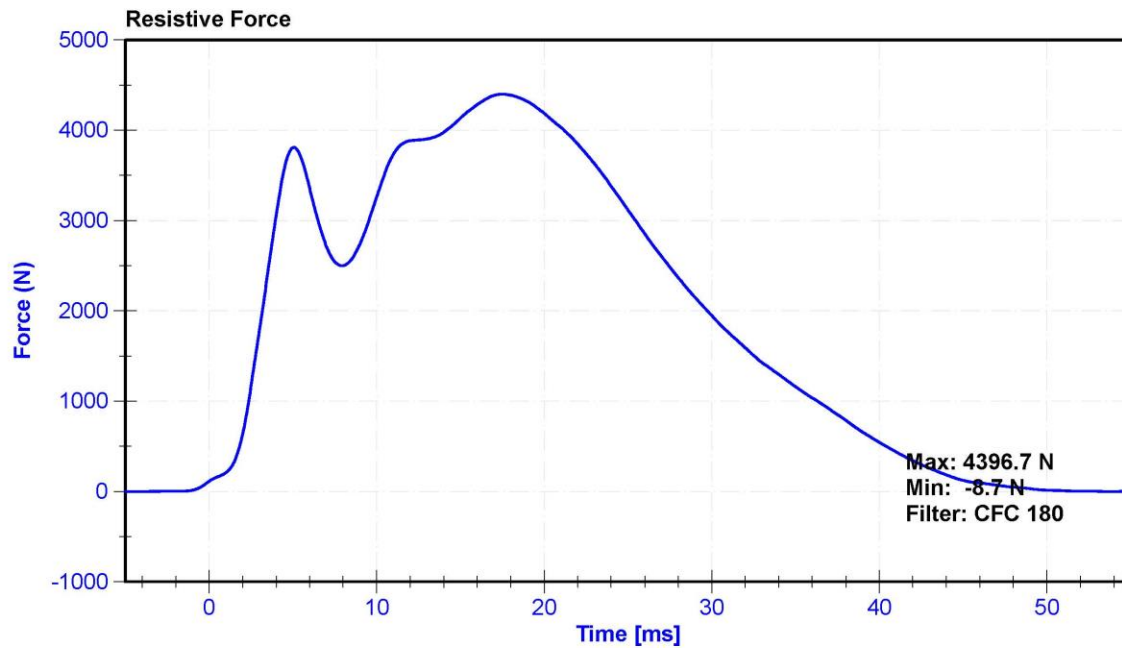

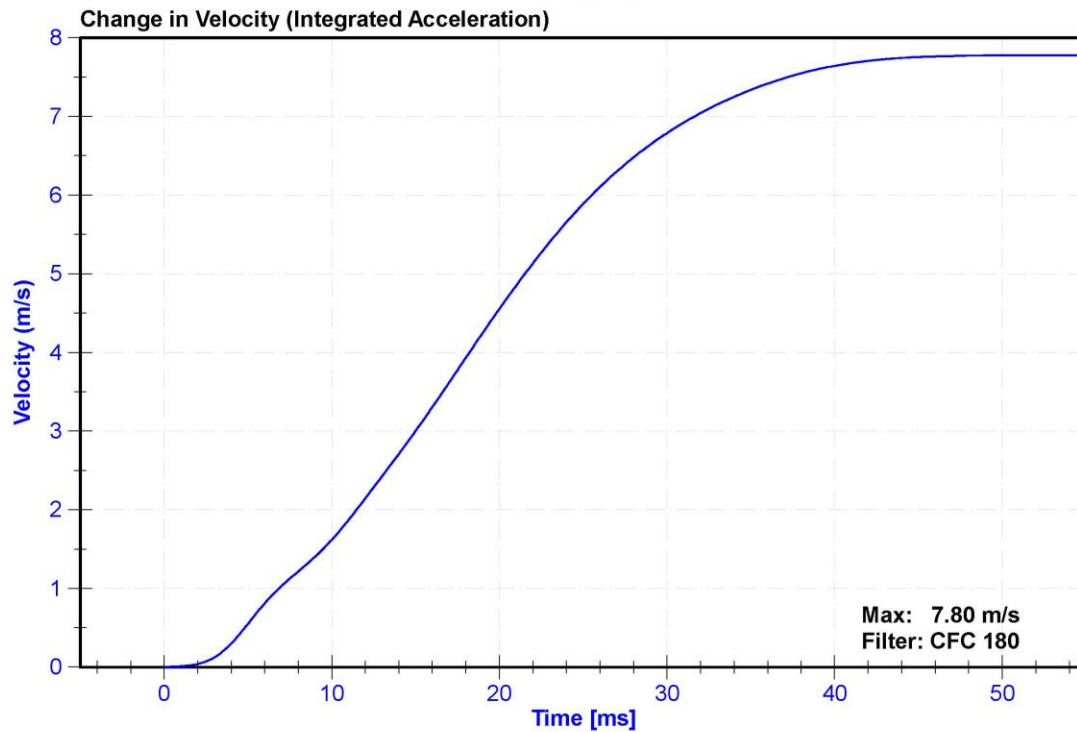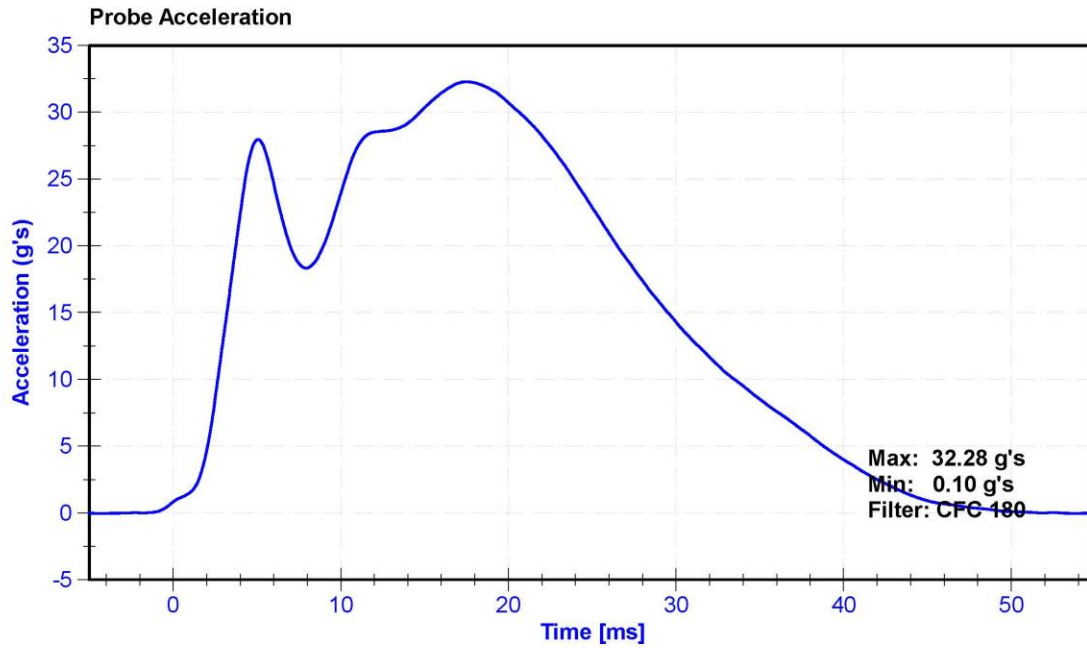


ATD Manufacturer	Denton	Test Technician	D.Reinhard
ATD Serial Number	139	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.6	25.6	°C	21	Pass
Humidity	10	70	%	23	Pass
Initial Angle	0	20	deg	15.6	Pass
Force at 45 Degrees	320	390	N	374.8	Pass
Return Angle Relative to Initial	0	8	deg	0.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	Rieker N4C-1	DS-13051548	2019-12-09	2020-12-08
Load Cell	Interface SML-200	LC-493319	2020-01-10	2021-01-09

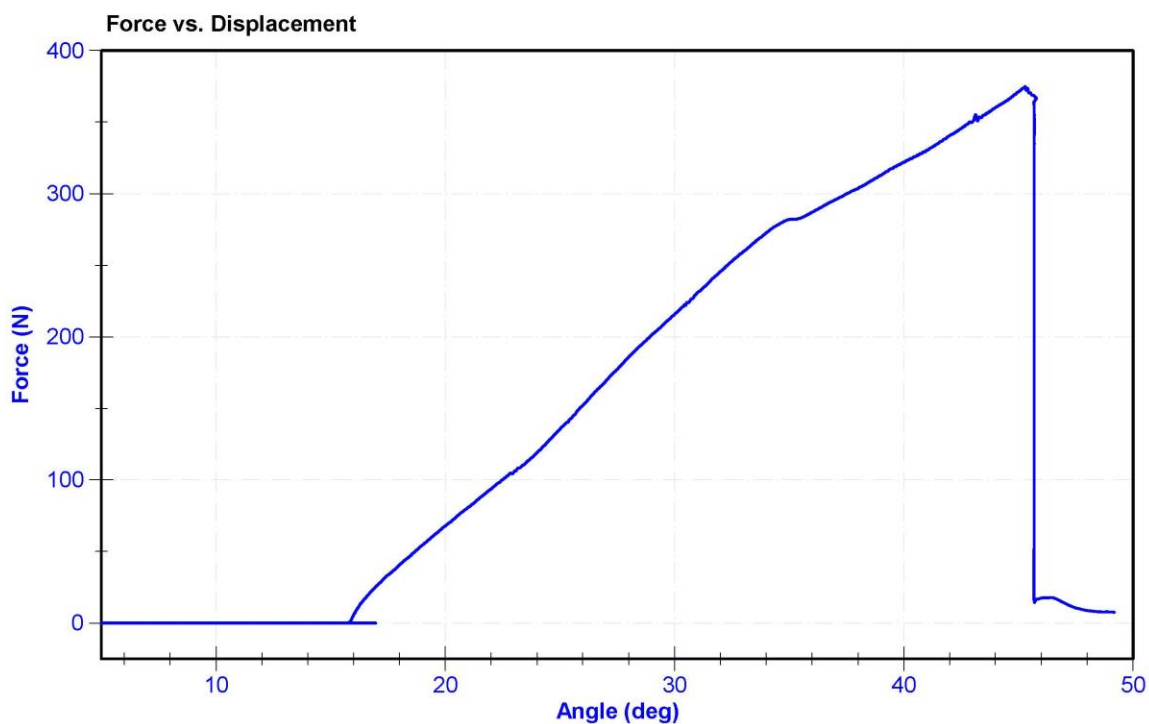


ATD Manufacturer	Denton	Test Technician	E. Helenbrook
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.3	Pass
Humidity	10	70	%	32.2	Pass
Velocity	2.07	2.13	m/s	2.109	Pass
Resistive Force	3450	4060	N	3732.2	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	1/29/2020	1/28/2021

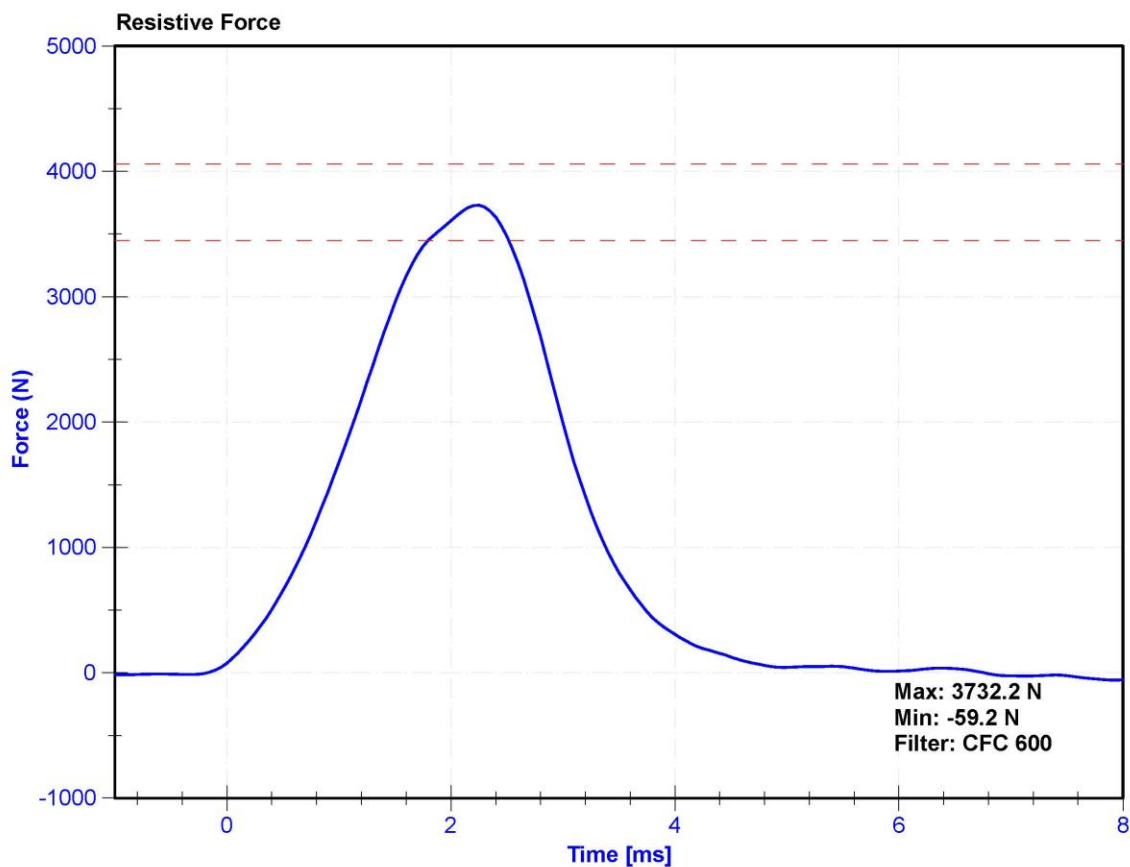

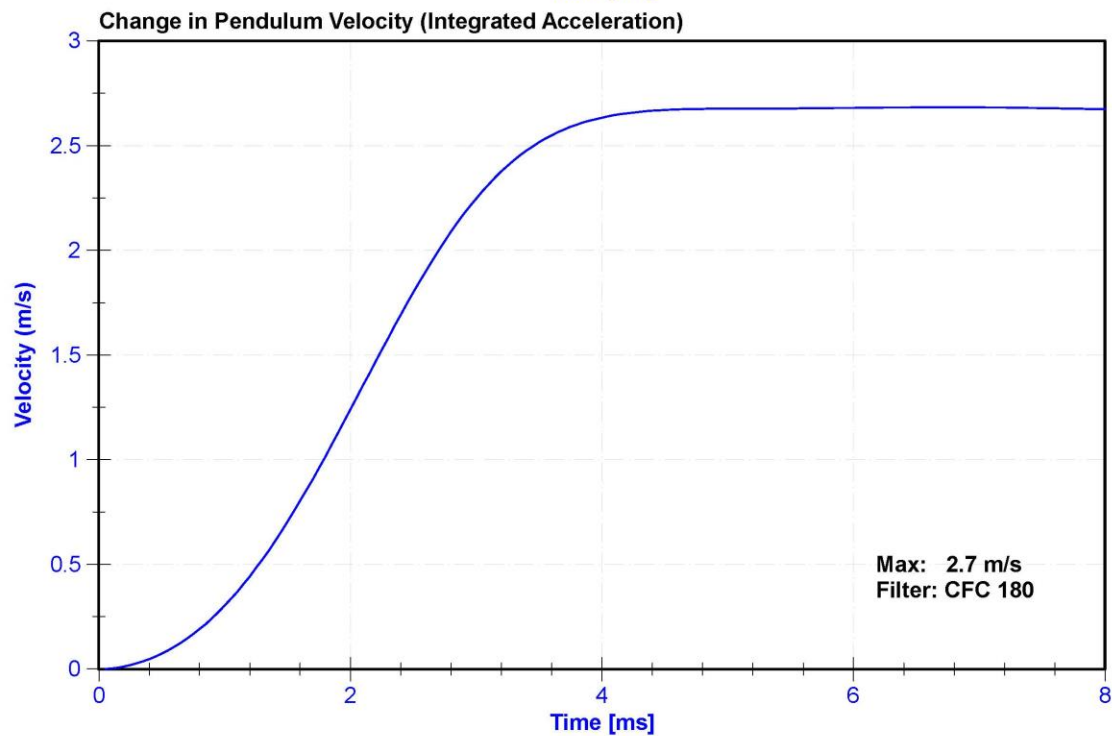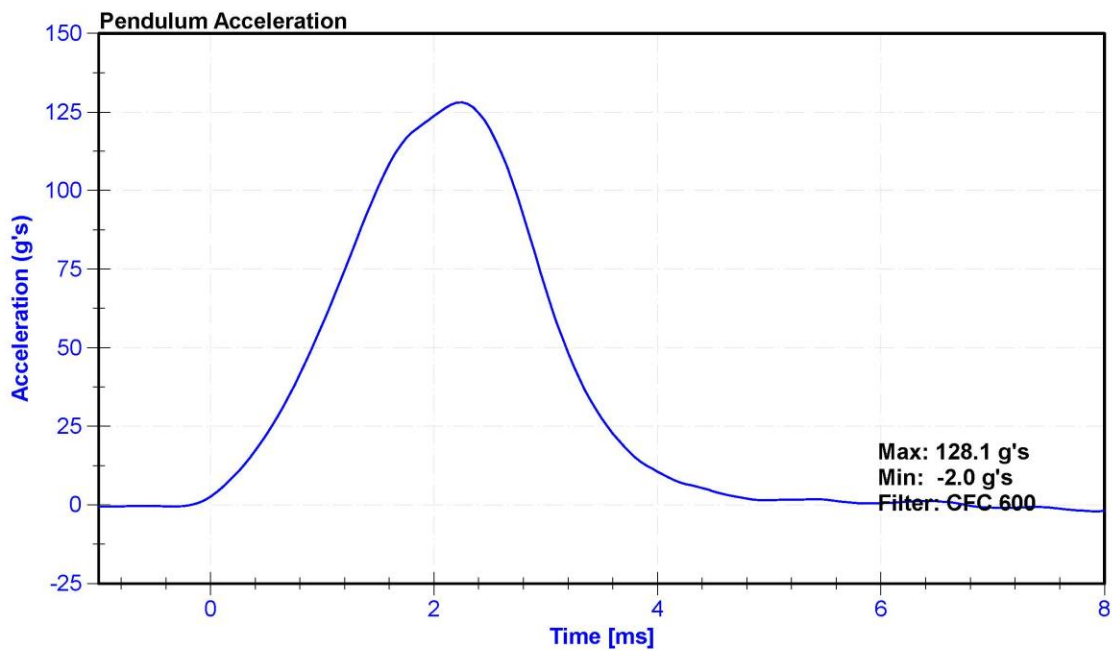


ATD Manufacturer	Denton	Test Technician	E. Helenbrook
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.3	Pass
Humidity	10	70	%	32.3	Pass
Velocity	2.07	2.13	m/s	2.105	Pass
Resistive Force	3450	4060	N	3999.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	1/29/2020	1/28/2021

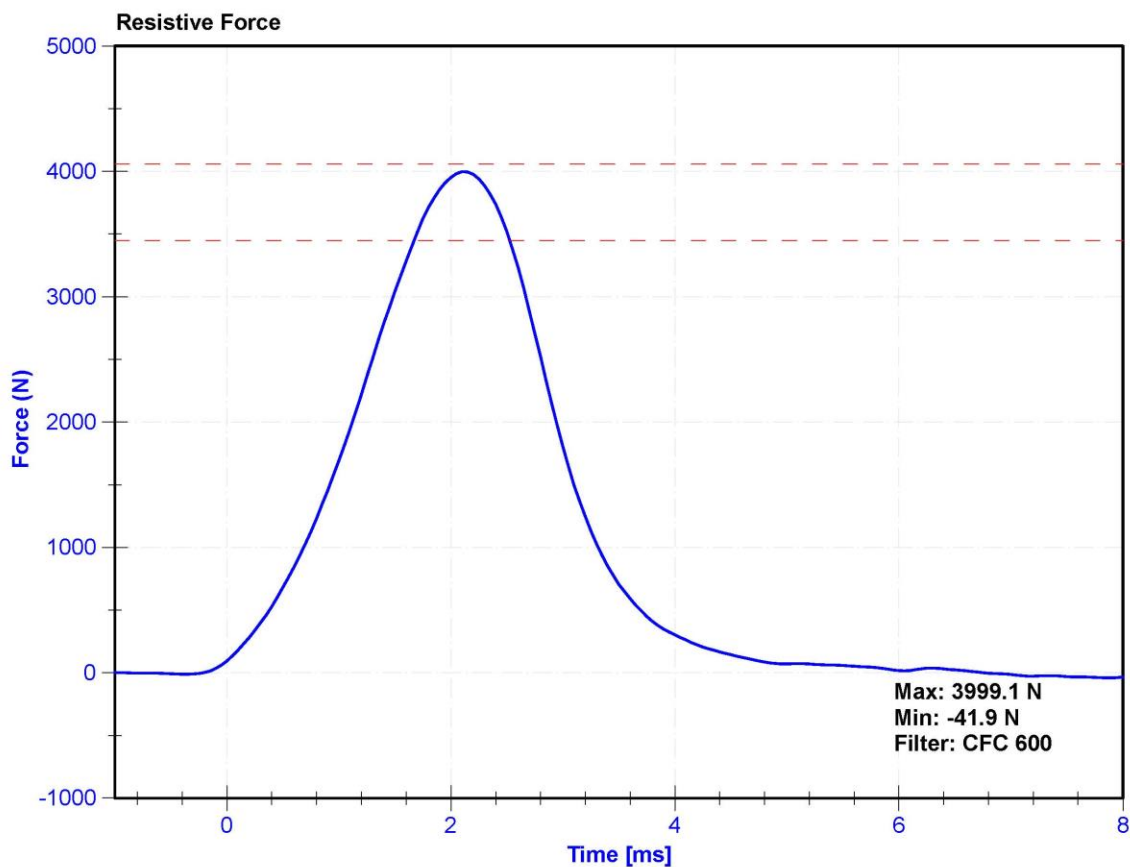

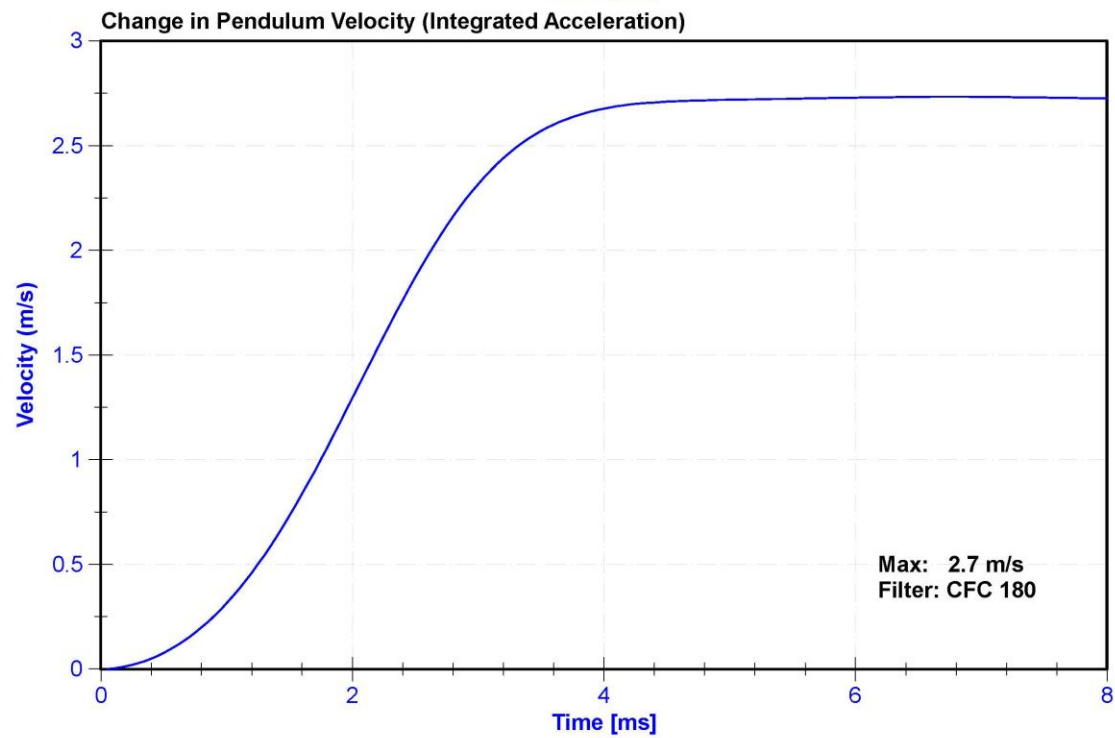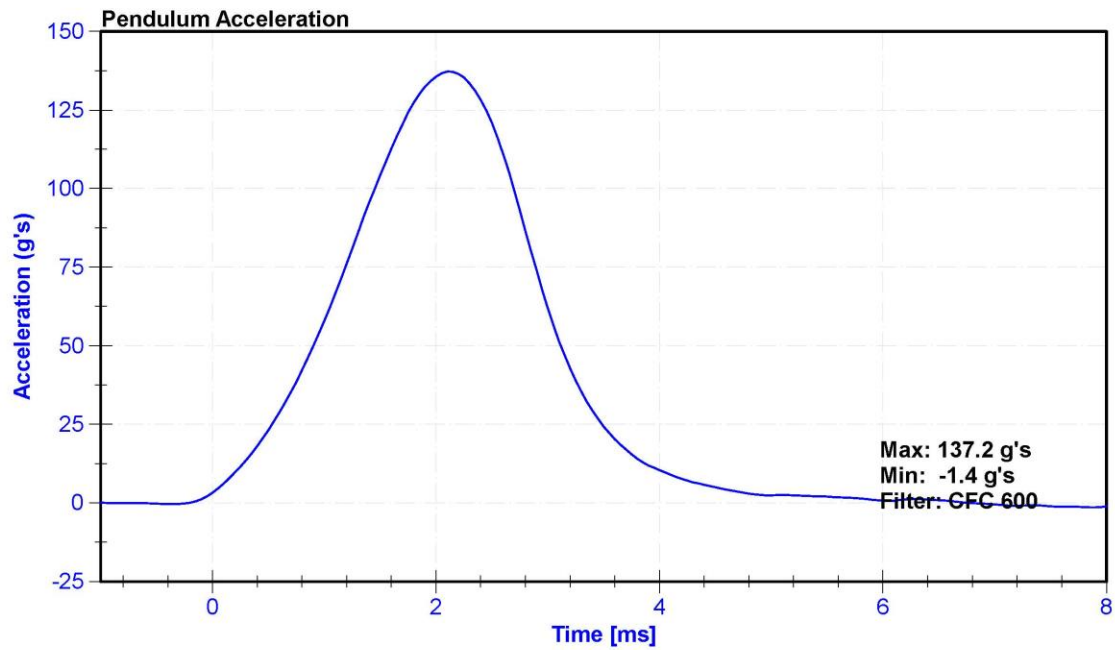

CALIBRATION TEST RESULTS

POST-TEST

HYBRID III 50TH PERCENTILE MALE - DRIVER ATD

SERIAL NO: 142




External Measurements - Hybrid 3 - 50th Male

Technician: K. Dutton

Date: 04/22/2020

Dummy Serial Number: 142

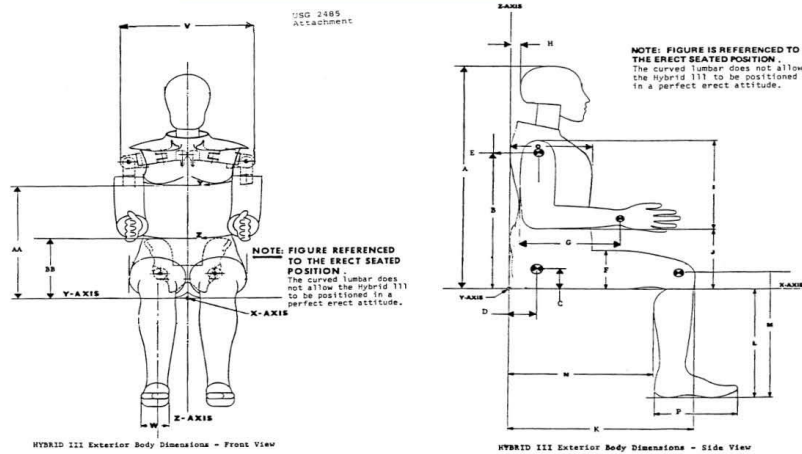

Symbol	Description	Specification (in)		Result (in)	Pass/Fail
A	Sitting Height	34.6	35.0	34.8	Pass
B	Shoulder Pivot Height	19.9	20.5	20.2	Pass
C	H-Point Height	3.3	3.5	3.4	Pass
D	H-Point from Backline	5.3	5.5	5.4	Pass
E	Shoulder Pivot from Backline	3.3	3.7	3.6	Pass
F	Thigh Clearance	5.5	6.1	5.9	Pass
G	Back of Elbow to Wrist Pivot	11.4	12.0	11.7	Pass
H	Head Back to Backline	1.6	1.8	1.7	Pass
I	Shoulder to Elbow Length	13.0	13.6	13.4	Pass
J	Elbow Rest Height	7.5	8.3	8.0	Pass
K	Buttock to Knee Length	22.8	23.8	23.3	Pass
L	Popliteal Height	16.9	17.9	17.4	Pass
M	Knee Pivot Height	19.1	19.7	19.6	Pass
N	Buttock Popliteal Length	17.8	18.8	18.5	Pass
O	Chest Depth without Jacket	8.4	9.0	8.7	Pass
P	Foot Length (right)	9.9	10.5	10.3	Pass
V	Shoulder Breadth	16.3	17.2	16.9	Pass
W	Foot Breadth	3.6	4.2	3.8	Pass
Y	Chest Circumference with Jacket	38.2	39.4	38.8	Pass
Z	Waist Circumference	32.9	34.1	33.7	Pass
AA	Reference Location (Chest Circumference)	16.9	17.1	17.0	Pass
BB	Reference Location (Waist Circumference)	8.9	9.1	9.0	Pass


ATD Manufacturer	Humanetics	Test Technician	M. Dudek
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.2	Pass
Humidity	10	70	%	23.8	Pass
Resultant Acceleration	225	275	g's	269.7	Pass
Oscillation	0	10	%	4.7	Pass
Lateral Acceleration	-15	15	g's	-11.3	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264	P51681	4/17/2020	10/16/2020
Y Accelerometer	ENDEVCO 7264	P64151	4/17/2020	10/16/2020
Z Accelerometer	ENDEVCO 7264	P52114	4/17/2020	10/16/2020

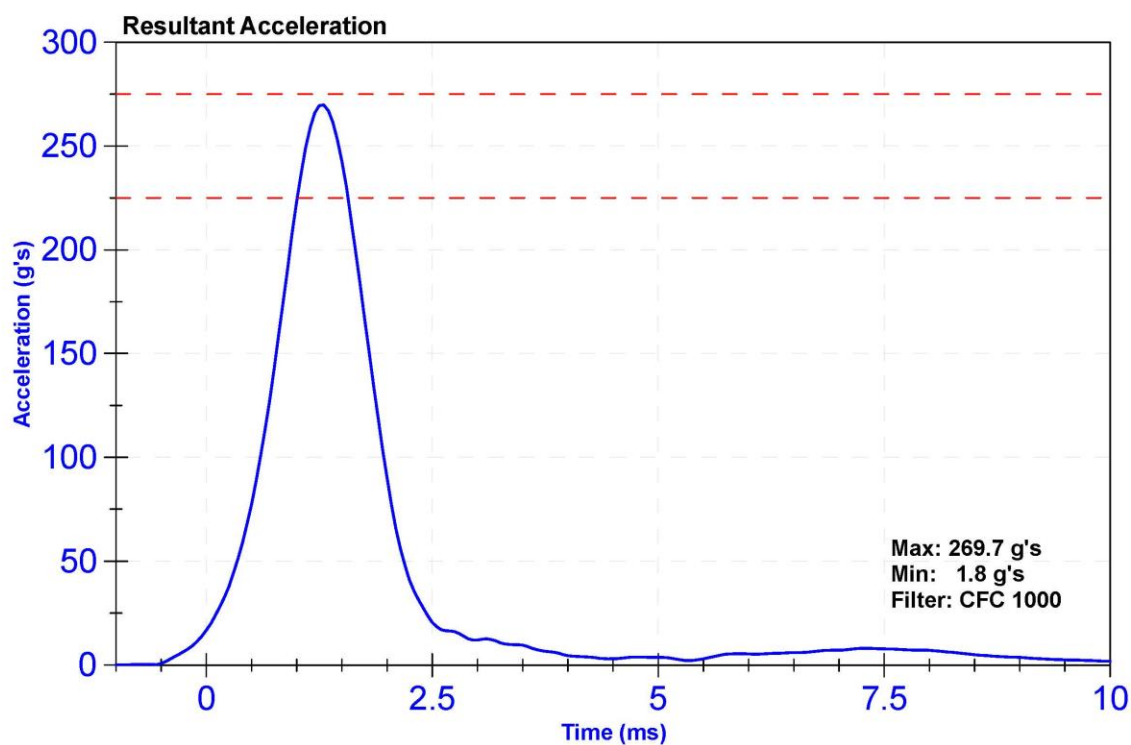

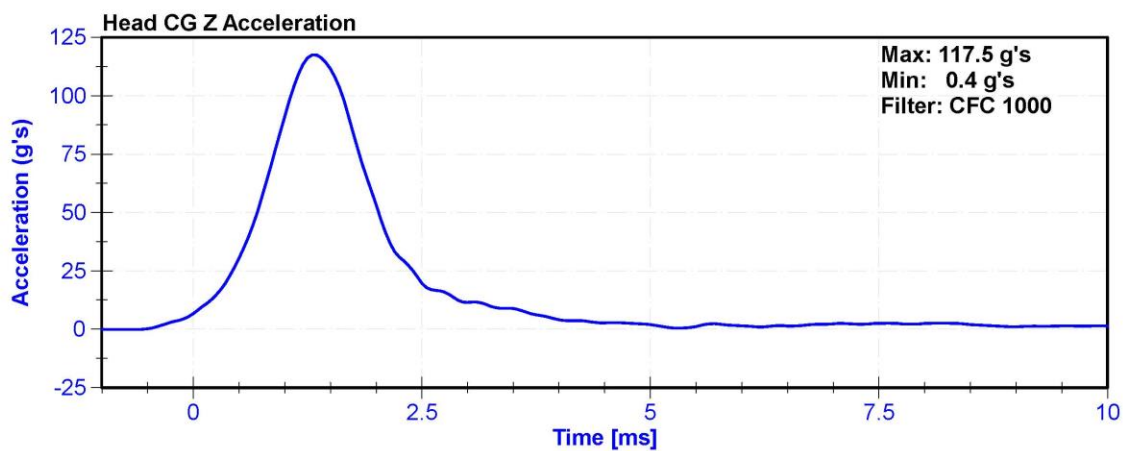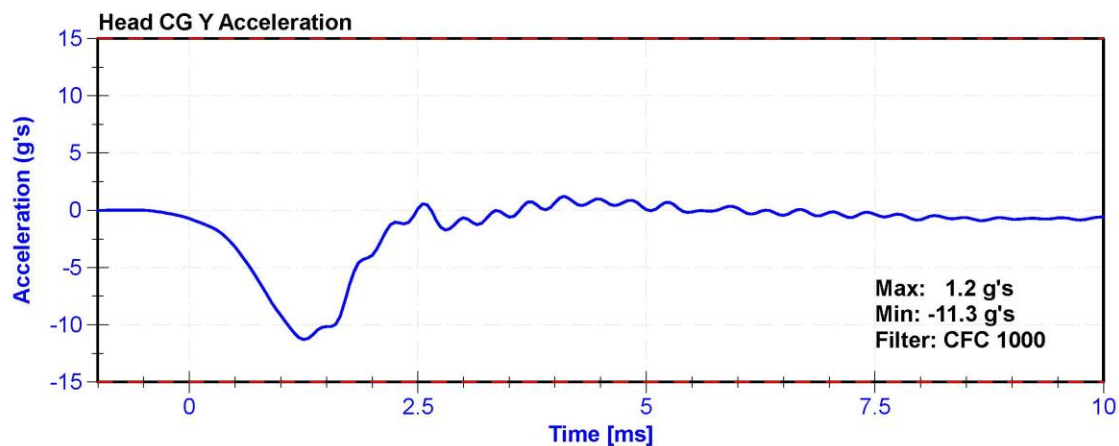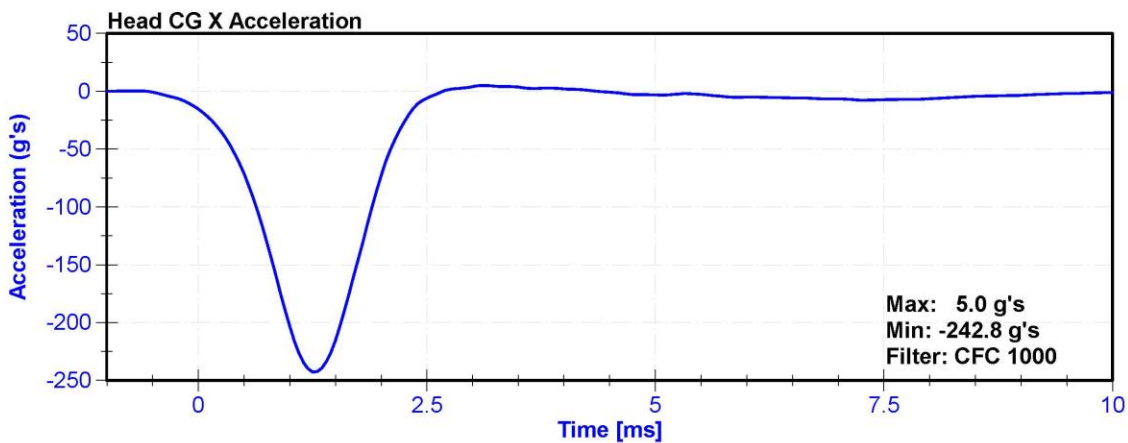



ATD Manufacturer	Humanetics	Test Technician	M. Dudek
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	22.7	Pass
Velocity	6.89	7.13	m/s	6.903	Pass
Pendulum Deceleration at 10ms	22.5	27.5	g's	25.35	Pass
Pendulum Deceleration at 20ms	17.6	22.6	g's	21.73	Pass
Pendulum Deceleration at 30ms	12.5	18.5	g's	15.37	Pass
Max. Pendulum Deceleration After 30ms	0	29	g's	25.4	Pass
Pendulum Deceleration Time to 5 g's	34	42	ms	40.6	Pass
Maximum D Plane Rotation	64	78	deg	75.3	Pass
Time to Maximum Rotation	57	64	ms	63.0	Pass
Rotation Decay to Zero	113	127	ms	120.3	Pass
Moment About Occipital Condyle	88.1	108.4	Nm	92.54	Pass
Time to Maximum Moment	47	58	ms	54.5	Pass
Moment Decay to Zero	97	107	ms	103.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/30/2020	1/29/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	Denton IF-205	LC-280FxGFE	10/3/2019	10/2/2020

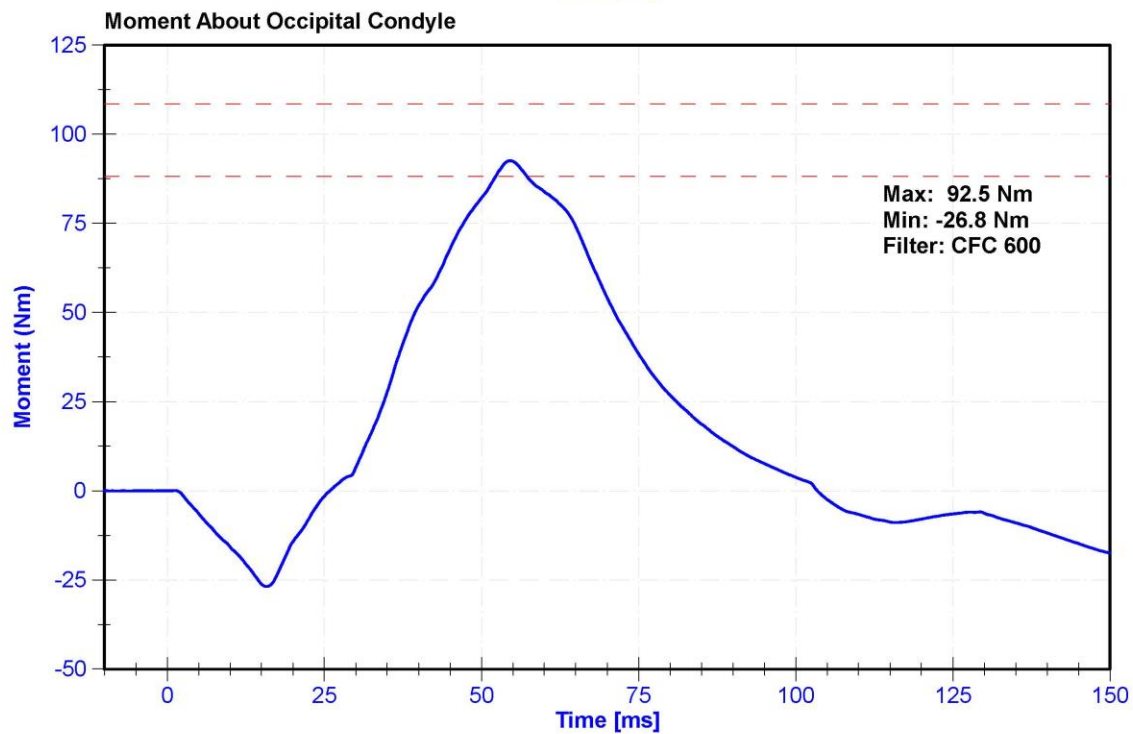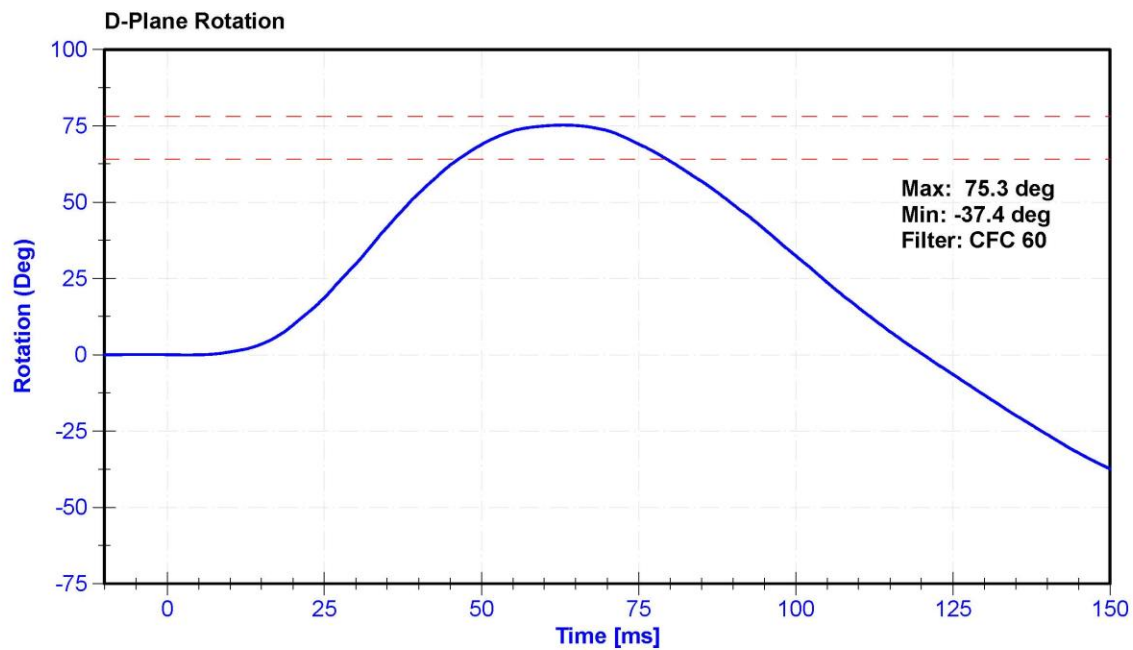

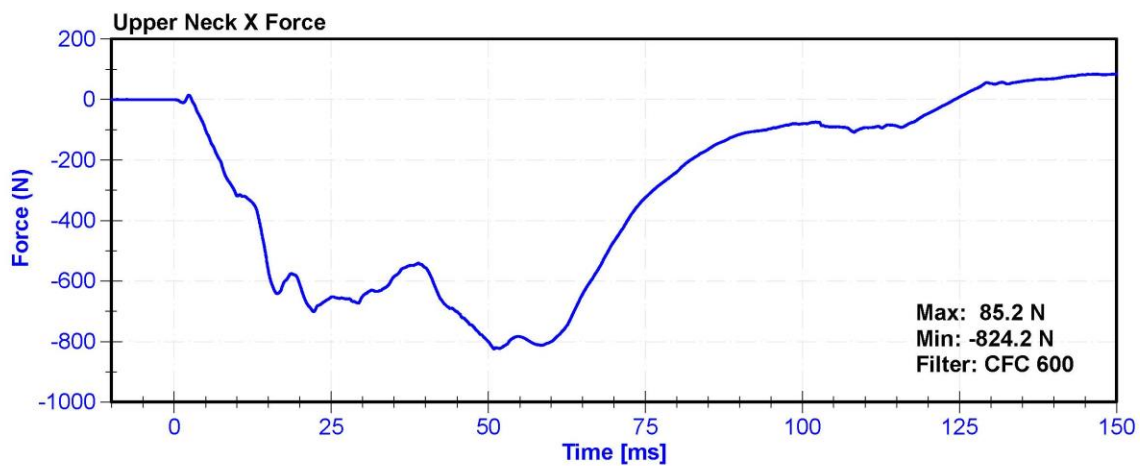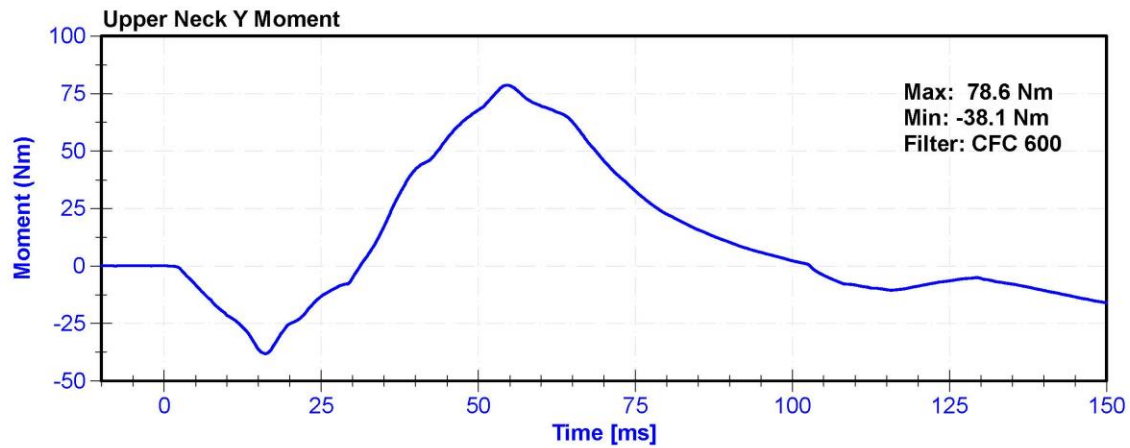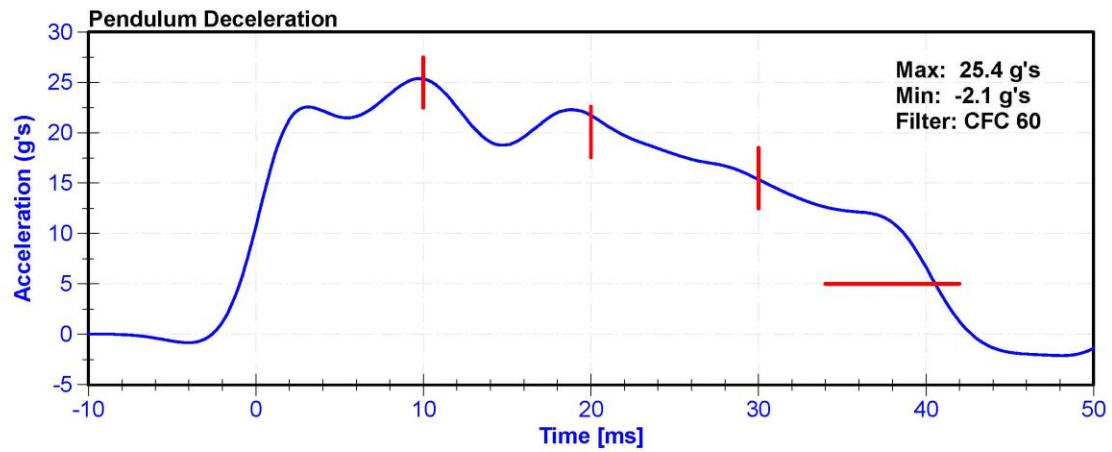



ATD Manufacturer	Humanetics	Test Technician	M. Dudek
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	23.8	Pass
Velocity	5.94	6.19	m/s	5.964	Pass
Pendulum Deceleration at 10ms	17.2	21.2	g's	19.94	Pass
Pendulum Deceleration at 20ms	14	19	g's	17.8	Pass
Pendulum Deceleration at 30ms	11	16	g's	13.7	Pass
Max. Pendulum Deceleration After 30ms	0	22	g's	19.9	Pass
Pendulum Deceleration Time to 5 g's	38	46	ms	45.2	Pass
Maximum D Plane Rotation	81	106	deg	96.4	Pass
Time to Maximum Rotation	72	82	ms	78.1	Pass
Rotation Decay to Zero	147	174	ms	158.8	Pass
Minimum Moment About OC	-80	-52.9	Nm	-66.94	Pass
Time to Minimum Moment	65	79	ms	69.2	Pass
Moment Decay to Zero	120	148	ms	141.3	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/30/2020	1/29/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	Denton IF-205	LC-280FxGFE	10/3/2019	10/2/2020

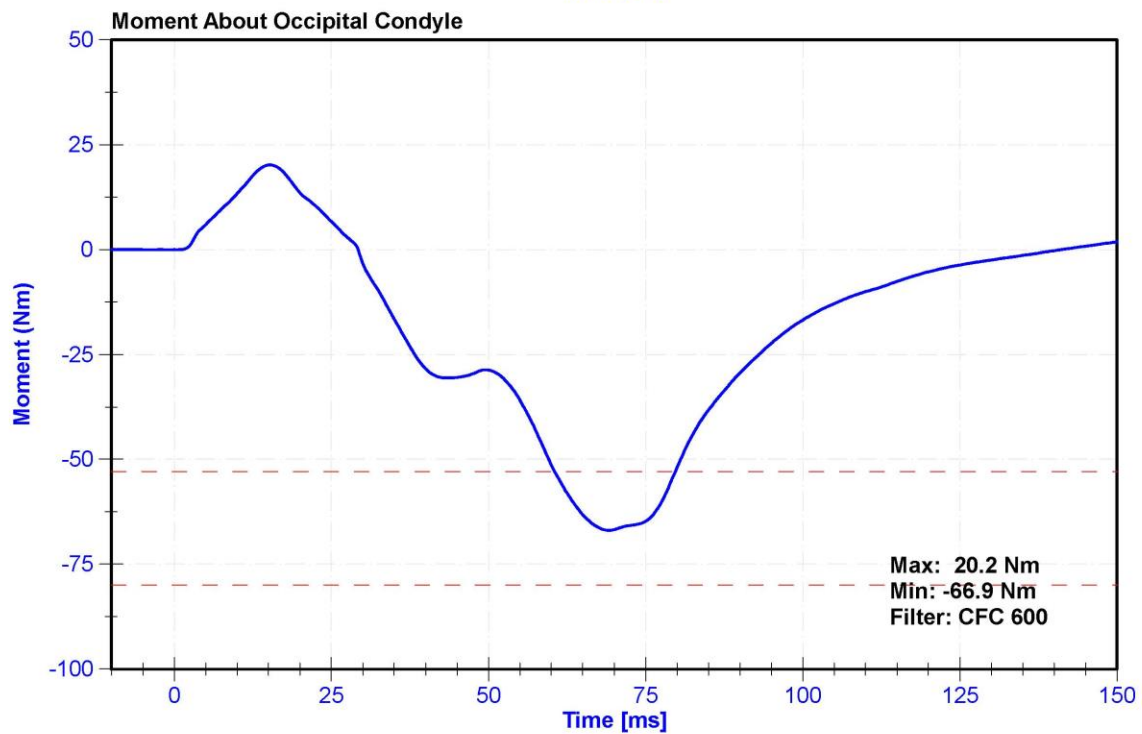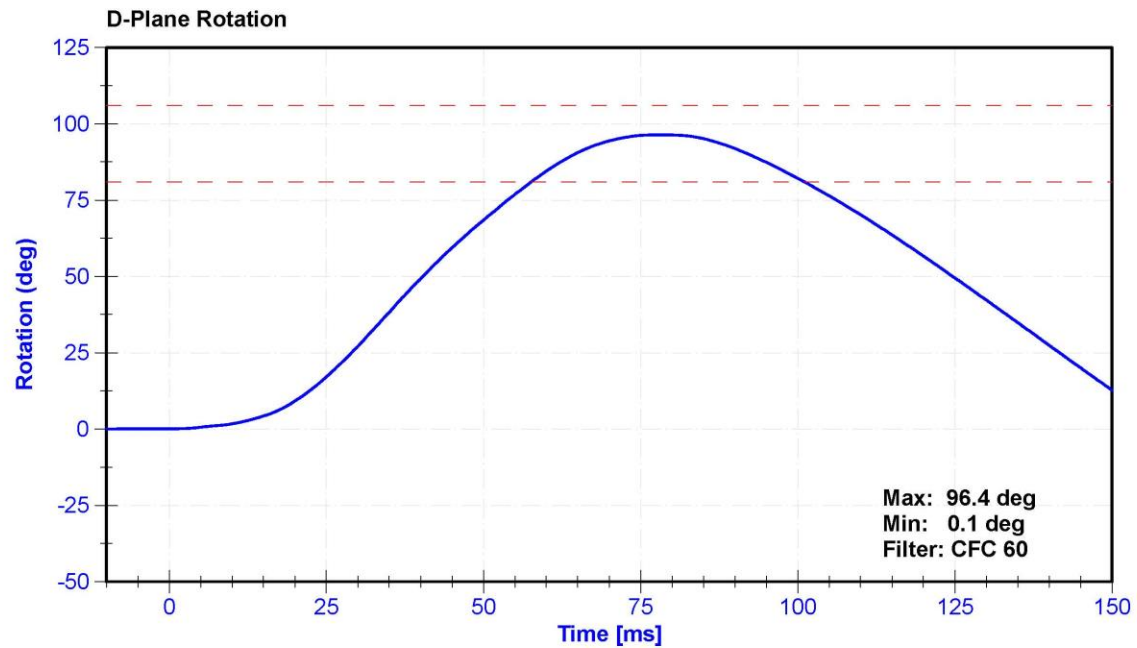

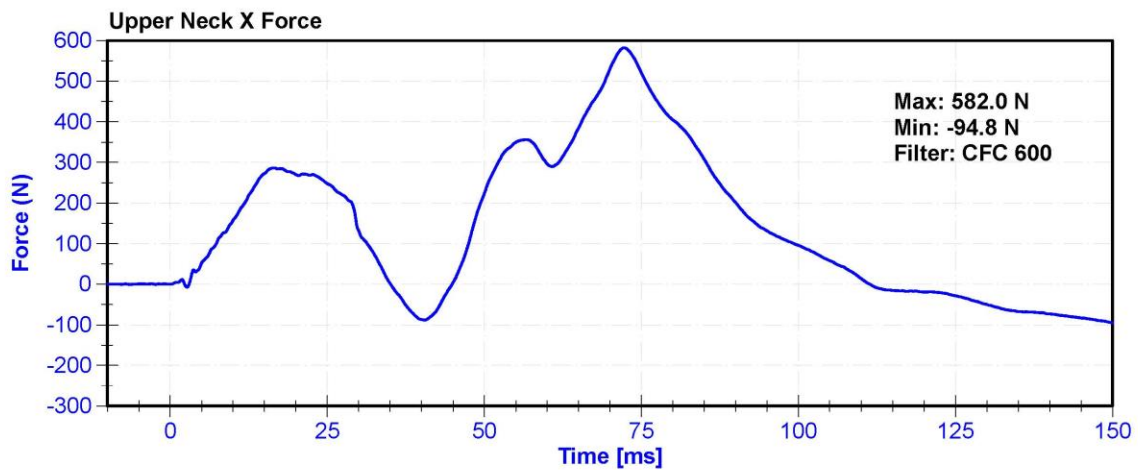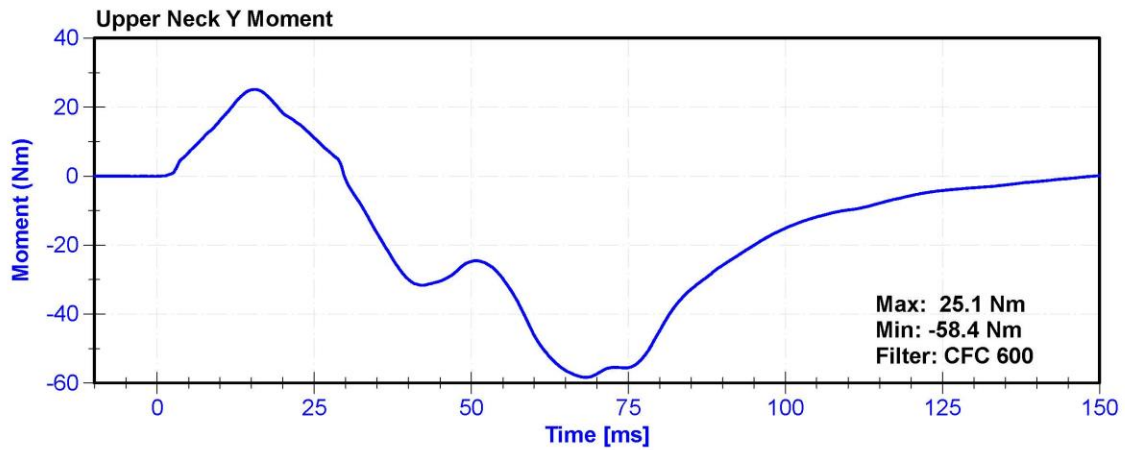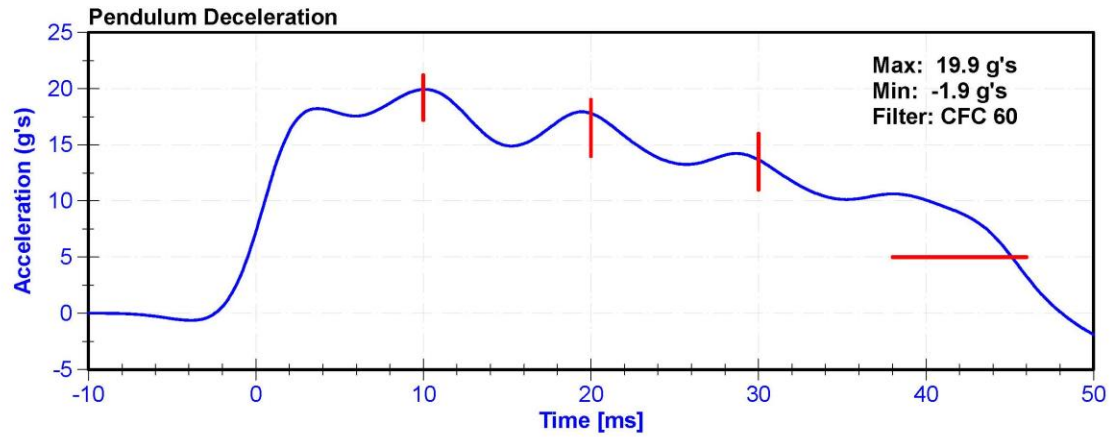


ATD Manufacturer	Humanetics	Test Technician	M. Dudek
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.2	Pass
Humidity	10	70	%	35.2	Pass
Velocity	6.59	6.83	m/s	6.597	Pass
Chest Displacement	-72.6	-63.5	mm	-70.42	Pass
Resistive Force	5160	5894	N	5642.6	Pass
Hysteresis	65	85	%	69.3	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A286228	1/29/2020	7/29/2020
Chest Potentiometer	Servo 6209-2038	DS-142	3/27/2020	9/25/2020

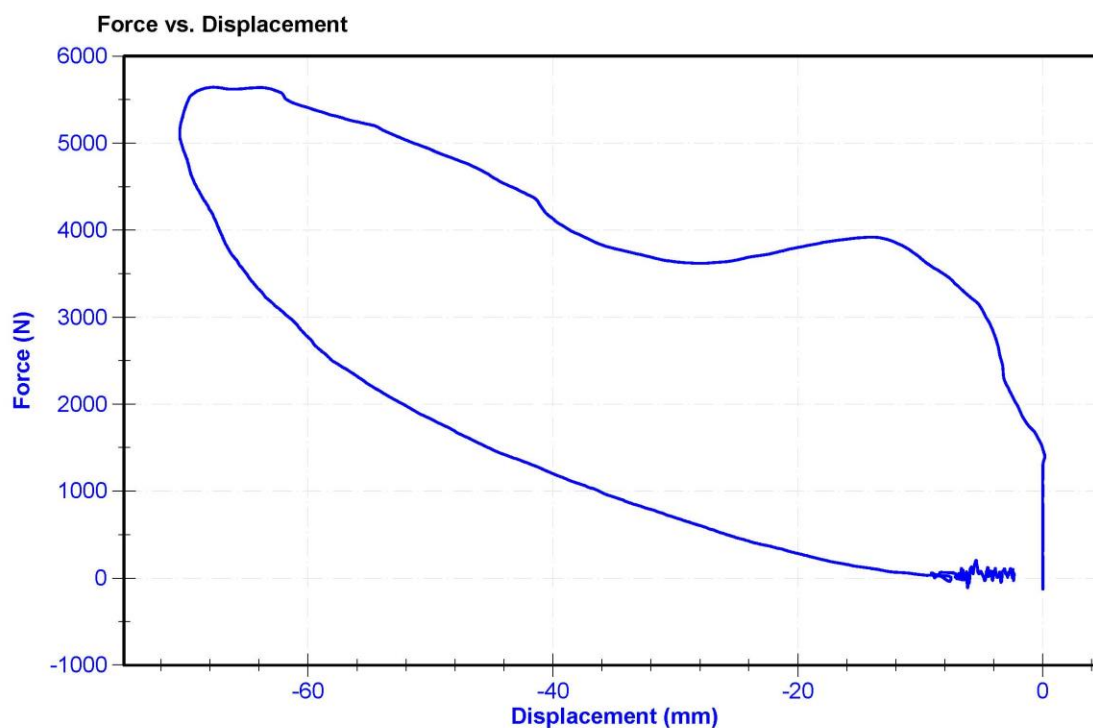

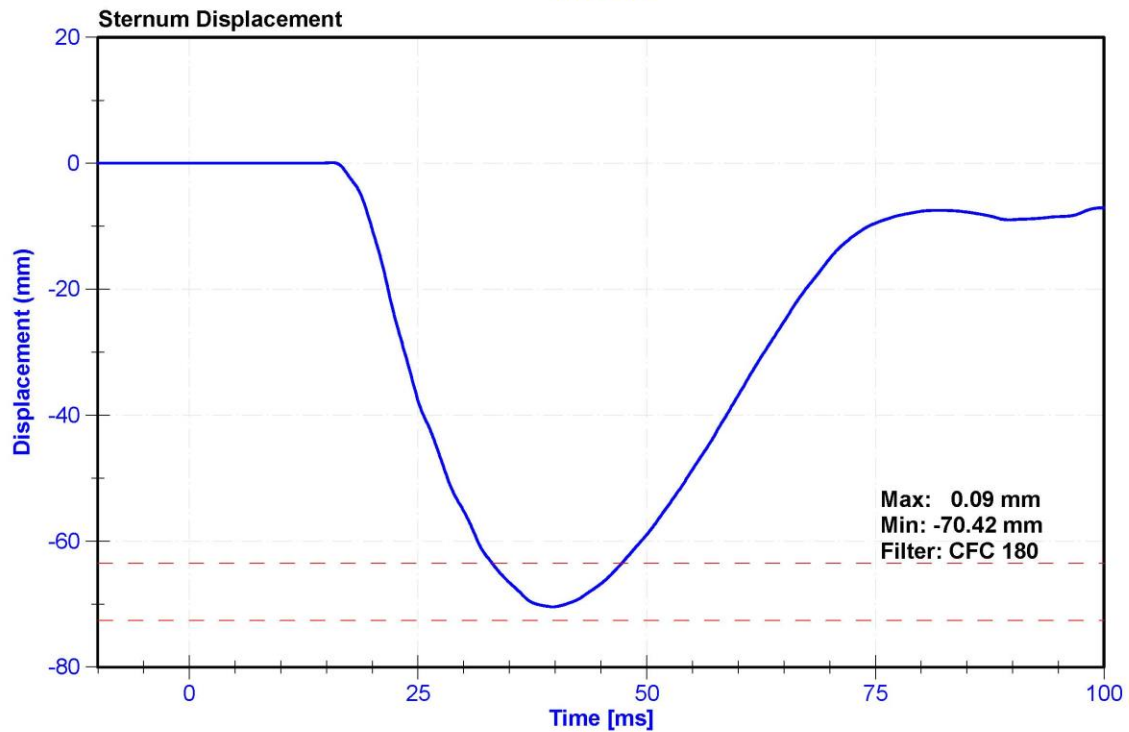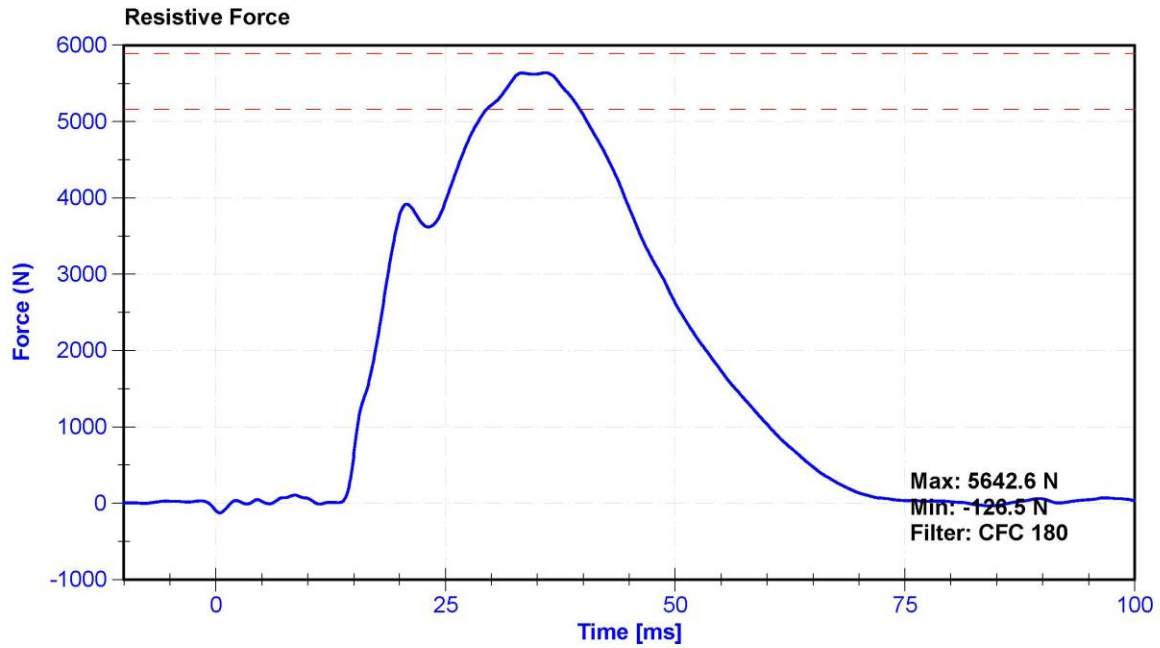

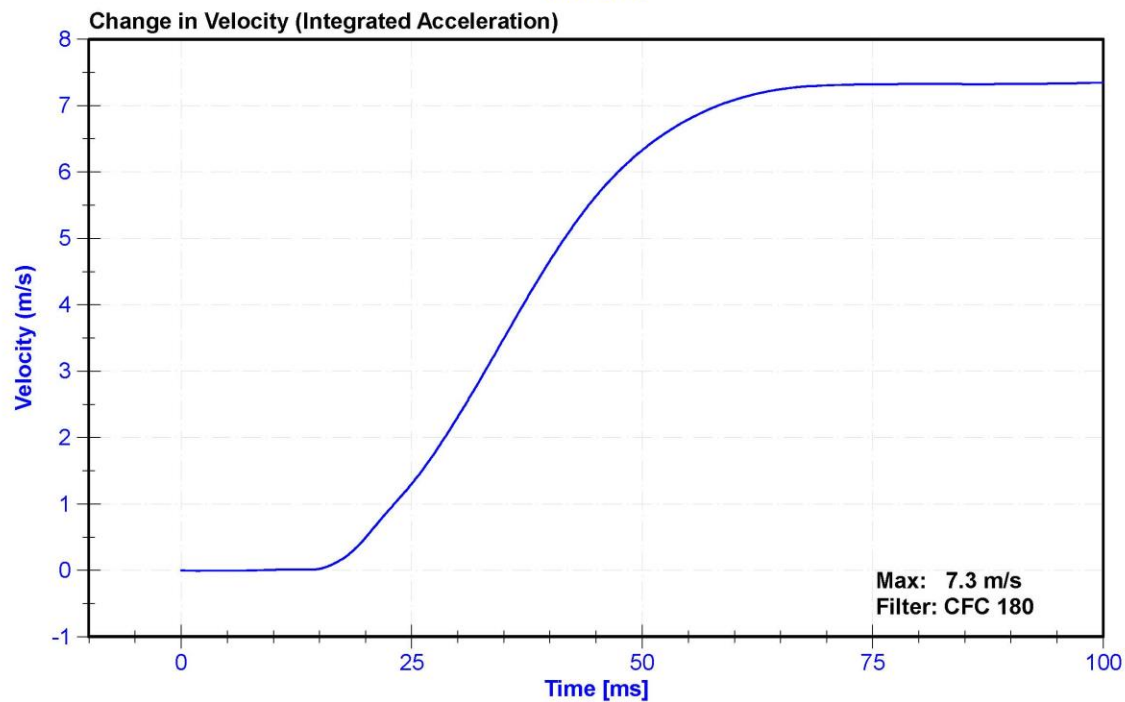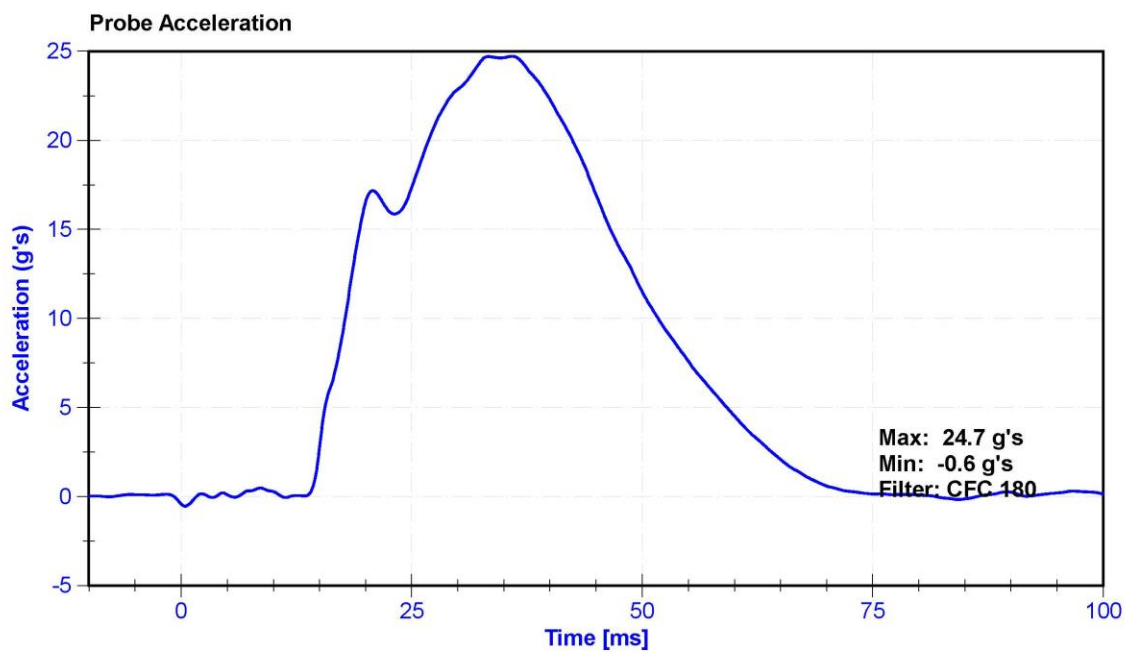


ATD Manufacturer	Humanetics	Test Technician	M. Dudek
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.8	Pass
Humidity	10	70	%	24.4	Pass
Average Velocity	5	10	deg/s	7.0	Pass
Angle at 203Nm	40	50	deg	48.7	Pass
Moment at 30 degrees	0	94.9	Nm	77.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	9/18/2019	9/17/2020
Load Cell	Key Trans 2301-02	LC-115 My	2019-09-12	2020-09-11

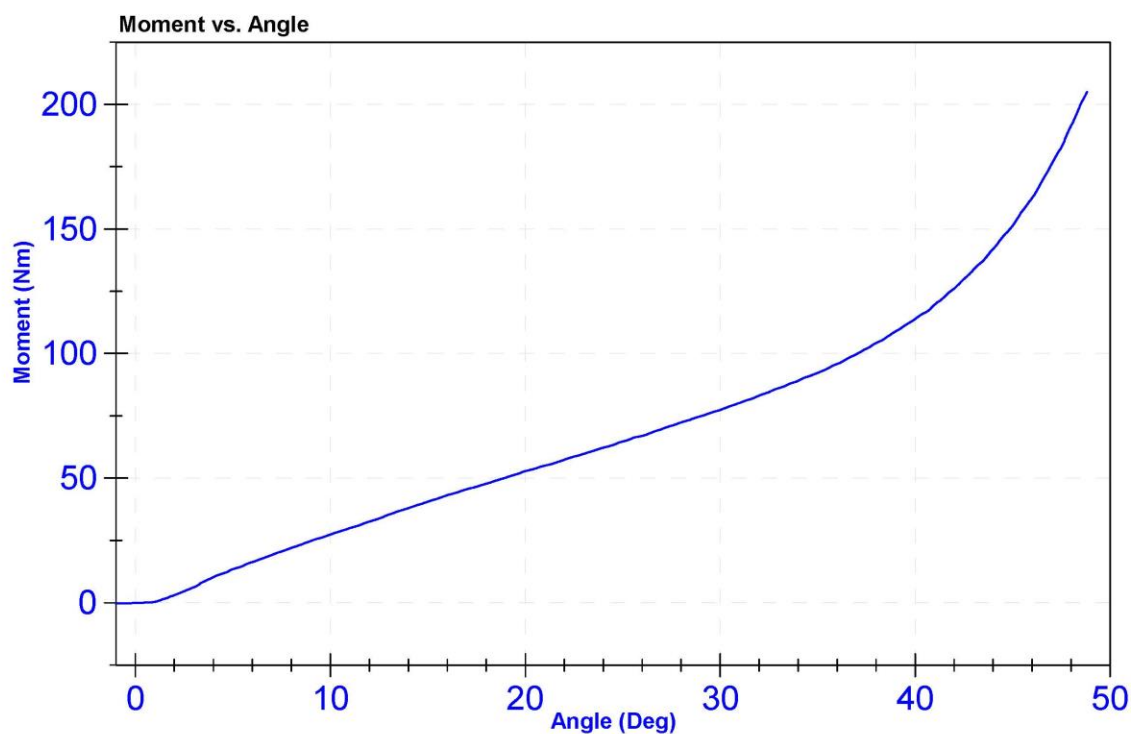


ATD Manufacturer	Humanetics	Test Technician	M. Dudek
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.8	Pass
Humidity	10	70	%	24.4	Pass
Average Velocity	5	10	deg/s	7.0	Pass
Angle at 203Nm	40	50	deg	47.1	Pass
Moment at 30 degrees	0	94.9	Nm	85.2	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	9/18/2019	9/17/2020
Load Cell	Key Trans 2301-02	LC-115 My	2019-09-12	2020-09-11

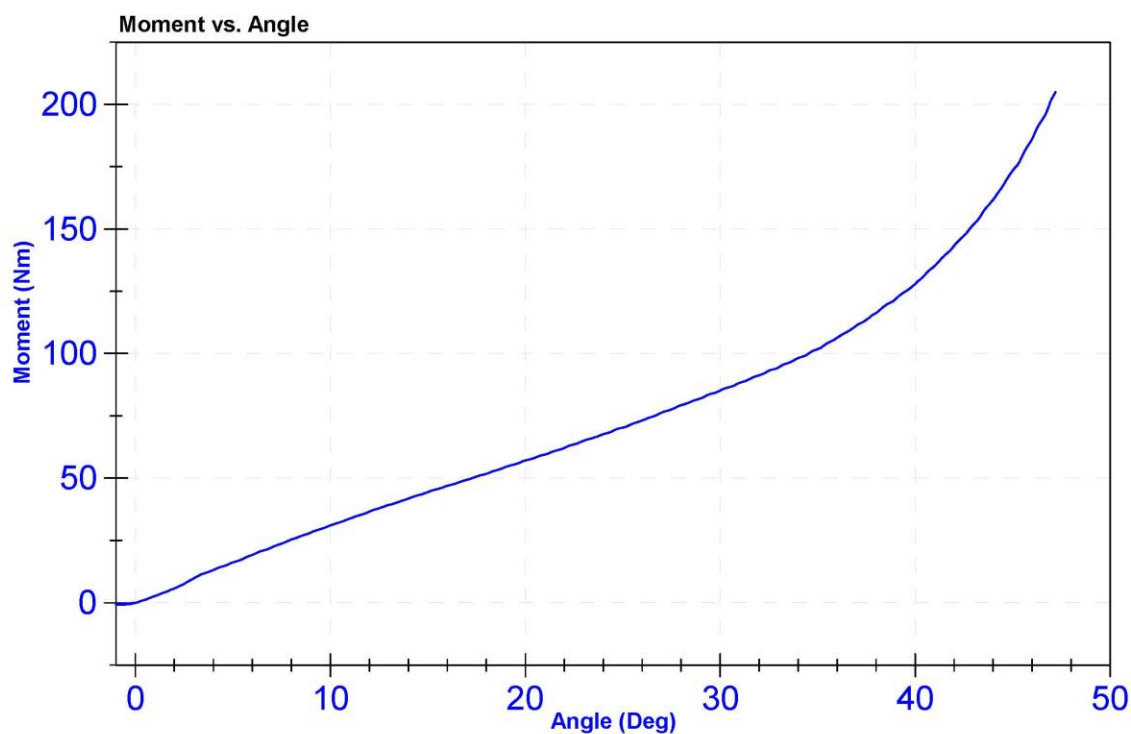


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21	Pass
Humidity	10	70	%	19.6	Pass
Velocity	2.07	2.13	m/s	2.104	Pass
Maximum Resistive Force	4720	5780	N	5365.2	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	1/29/2020	7/29/2020

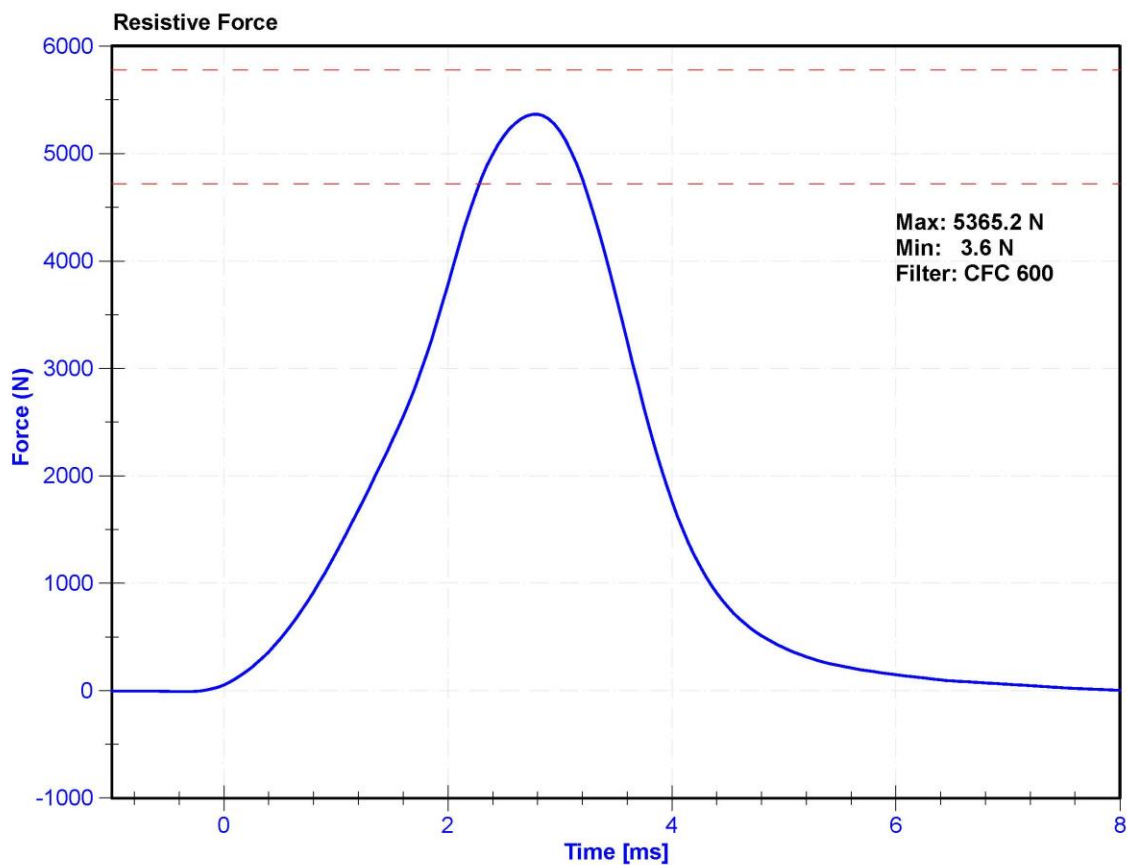

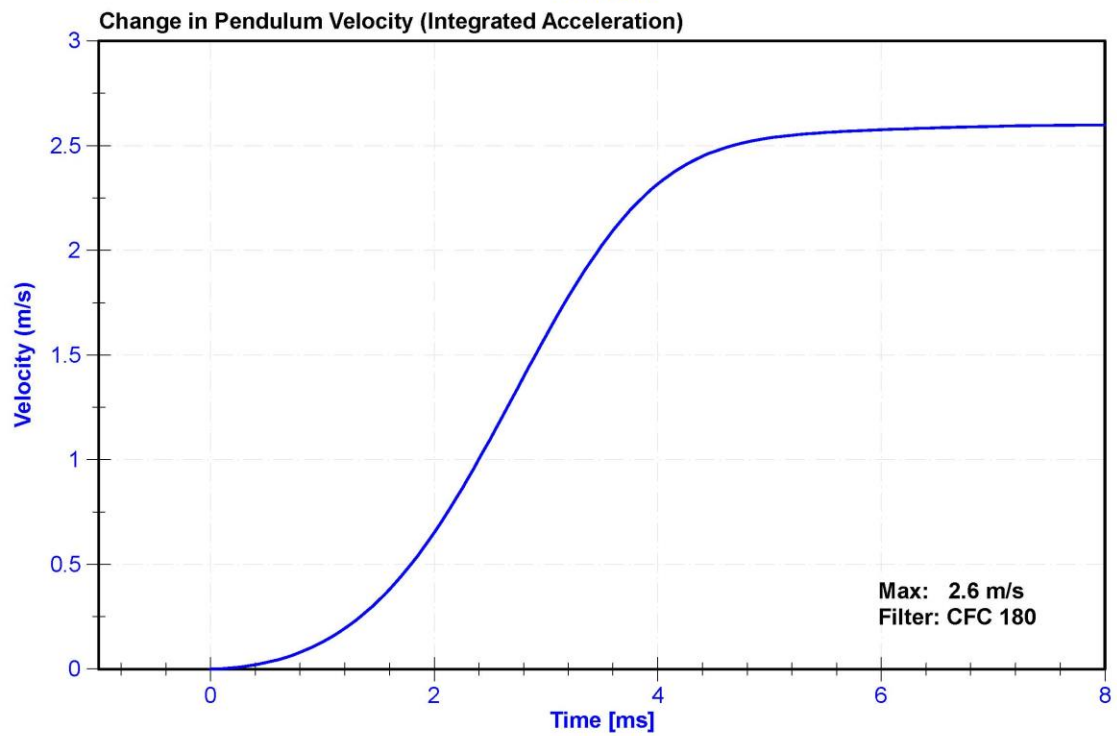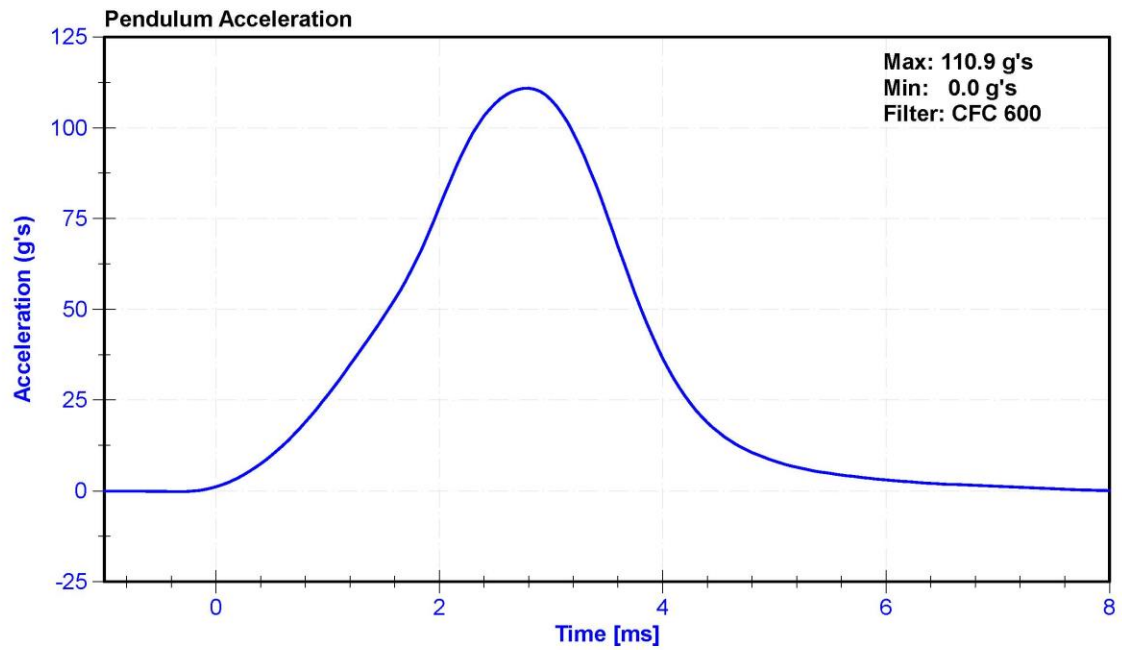


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.7	Pass
Humidity	10	70	%	23.8	Pass
Velocity	2.07	2.13	m/s	2.108	Pass
Maximum Resistive Force	4720	5780	N	5298.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	1/29/2020	7/29/2020

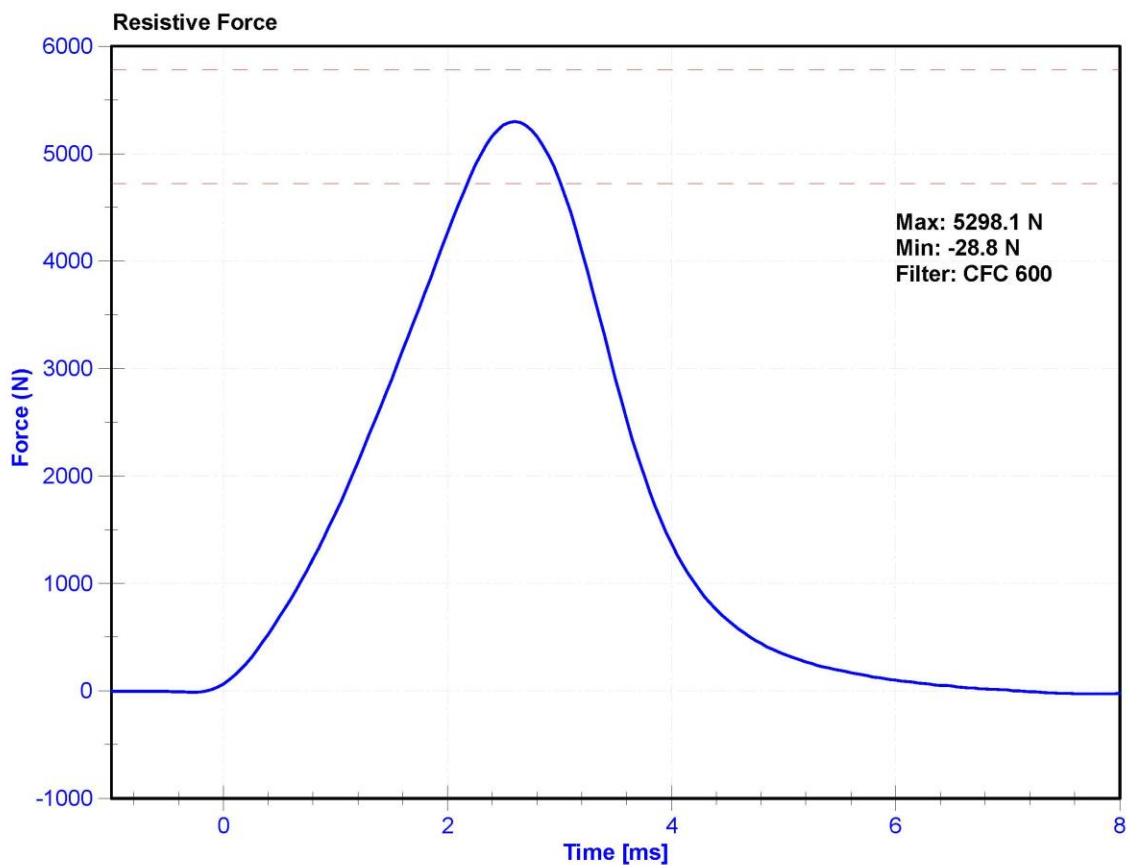

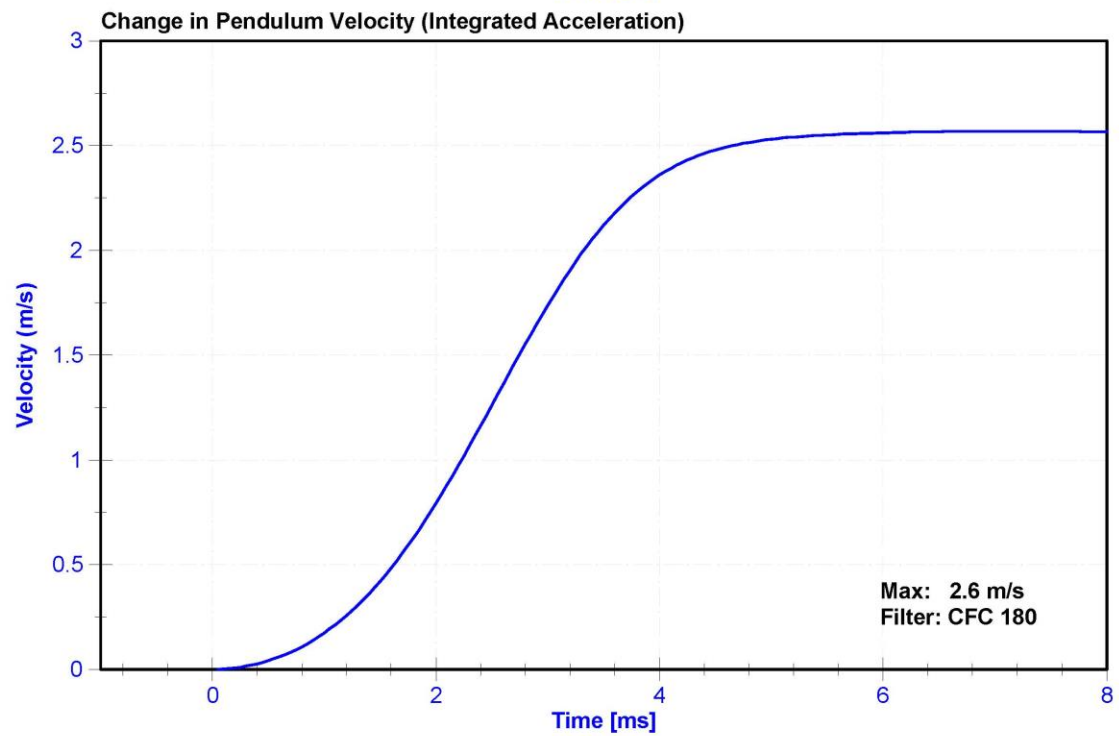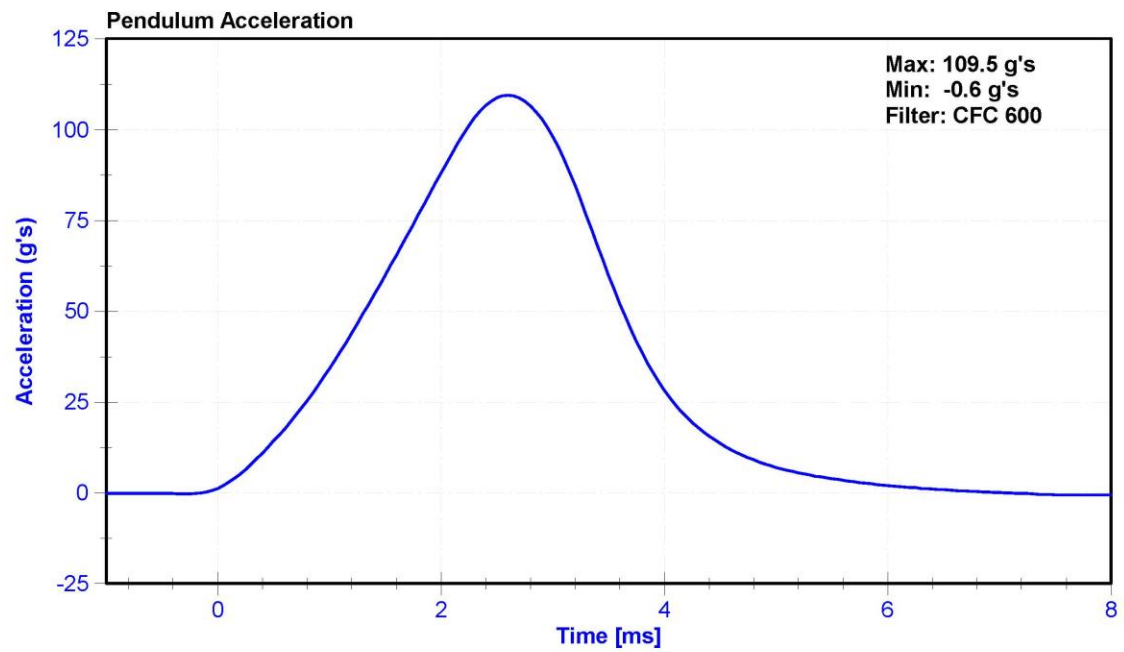

CALIBRATION TEST RESULTS

POST-TEST

HYBRID III 5TH PERCENTILE FEMALE - PASSENGER ATD

SERIAL NO: 139





External Measurements - Hybrid 3 - 5th Female

Technician: K. Brogan

Date: 04/22/2020

Dummy Serial Number: 139

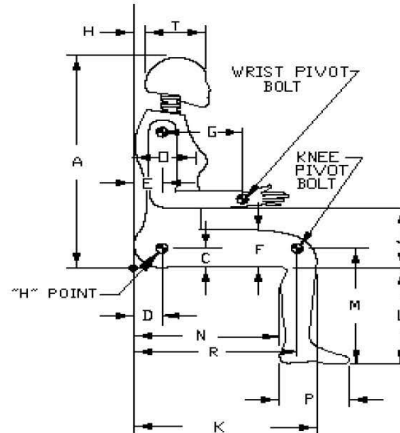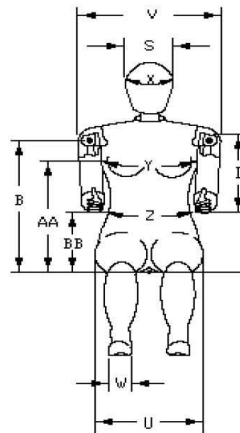

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	775	800	791	Pass
B	Shoulder Pivot Height	432	457	447	Pass
C	H-Point Height	81	86	84	Pass
D	H-Point from Backline	145	150	146	Pass
E	Shoulder Pivot from Backline	69	84	78	Pass
F	Thigh Clearance	119	135	125	Pass
G	Back of Elbow to Wrist Pivot	244	259	254	Pass
H	Head Back to Backline	43	48	45	Pass
I	Shoulder to Elbow Length	277	297	289	Pass
J	Elbow Rest Height	183	203	194	Pass
K	Buttock to Knee Length	521	546	541	Pass
L	Popliteal Height	356	376	363	Pass
M	Knee Pivot Height	394	419	402	Pass
N	Buttock Popliteal Length	414	439	426	Pass
O	Chest Depth without Jacket	175	191	185	Pass
P	Foot Length (right)	219	234	225	Pass
R	Buttock To Knee Pivot Length	457	483	473	Pass
S	Head Breadth	137	147	143	Pass
T	Head Depth	178	188	182	Pass
U	Hip Breadth	300	315	310	Pass
V	Shoulder Breadth	351	366	362	Pass
W	Foot Breadth	79	94	87	Pass
X	Head Circumference	528	549	535	Pass
Y	Chest Circumference with Jacket	851	881	861	Pass
Z	Waist Circumference	460	790	773	Pass
AA	Reference Location (Chest Circumference)	333	358	345	Pass
BB	Reference Location (Waist Circumference)	160	170	165	Pass


ATD Manufacturer	Denton	Test Technician	M. Dudek
ATD Serial Number	139	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.7	Pass
Humidity	10	70	%	23.8	Pass
Resultant Acceleration	250	300	g's	263.9	Pass
Oscillation	0	10	%	2.1	Pass
Lateral Acceleration	-15	15	g's	-3.2	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P58998	4/17/2020	10/16/2020
Y Accelerometer	ENDEVCO 7264	AC-P83320	4/17/2020	10/16/2020
Z Accelerometer	ENDEVCO 7264CT	AC-P58997	4/17/2020	10/16/2020

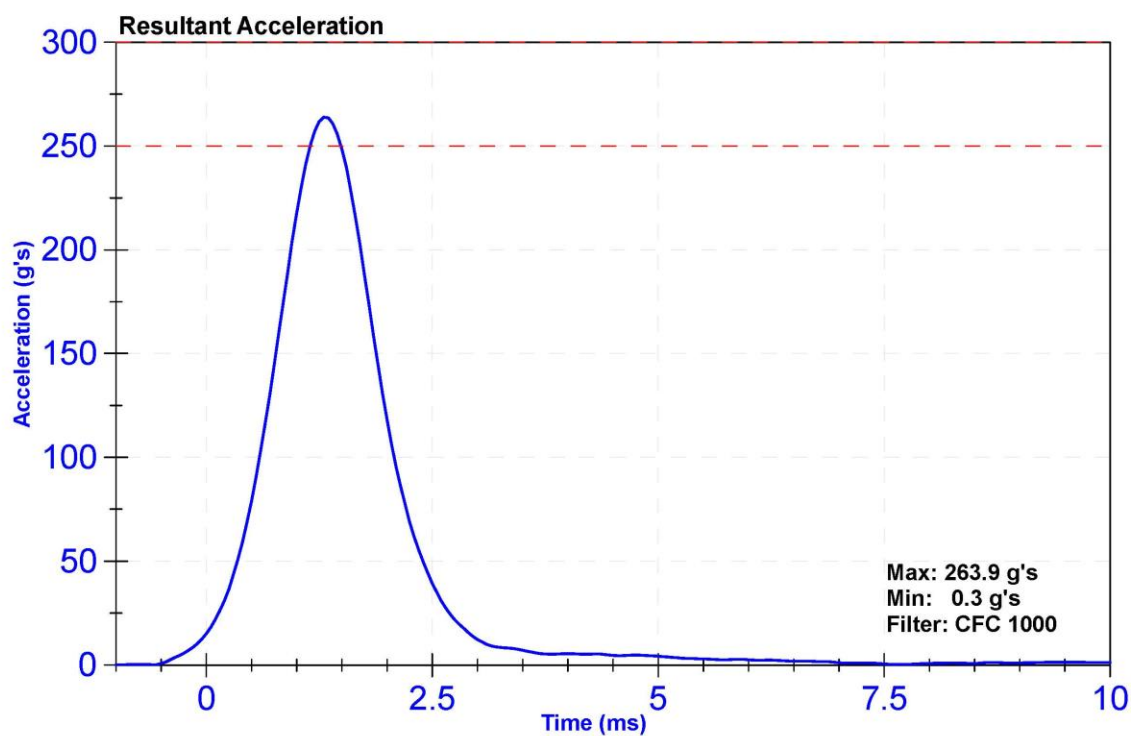

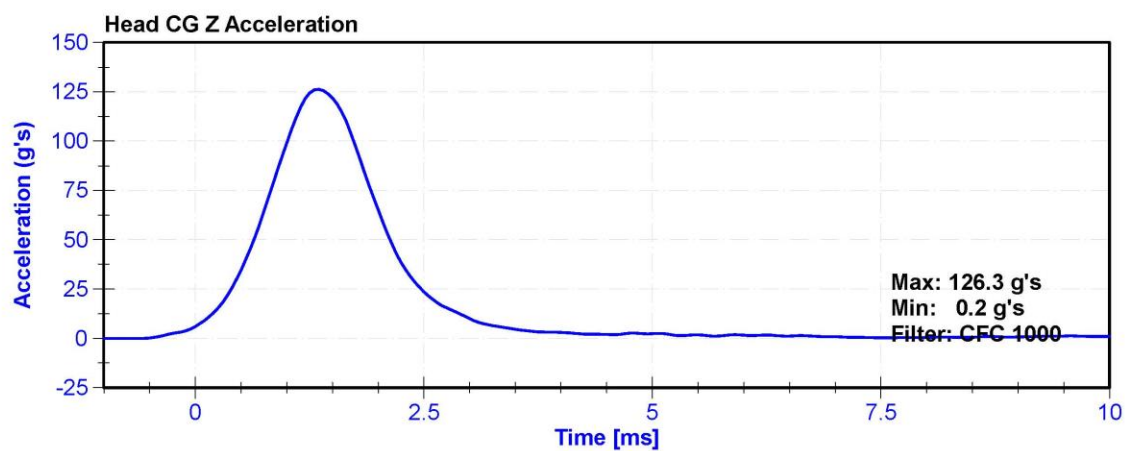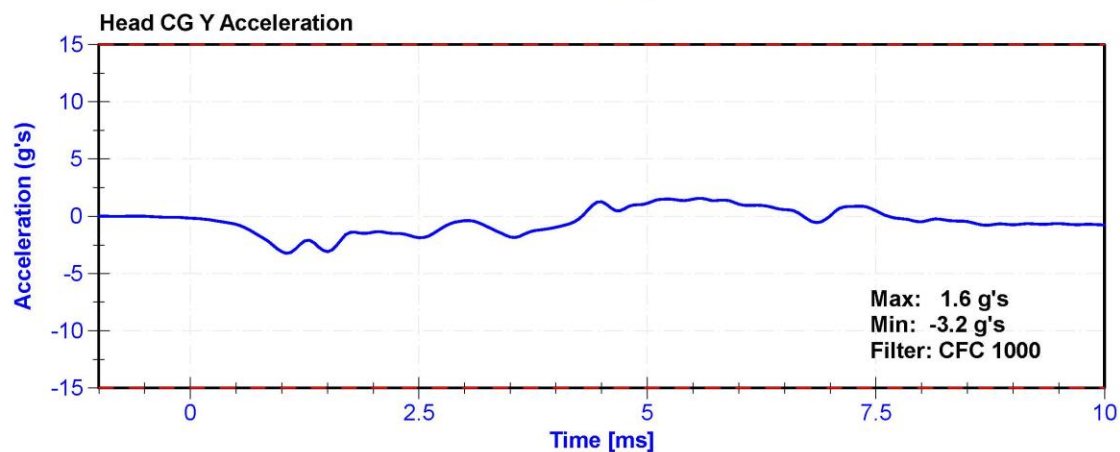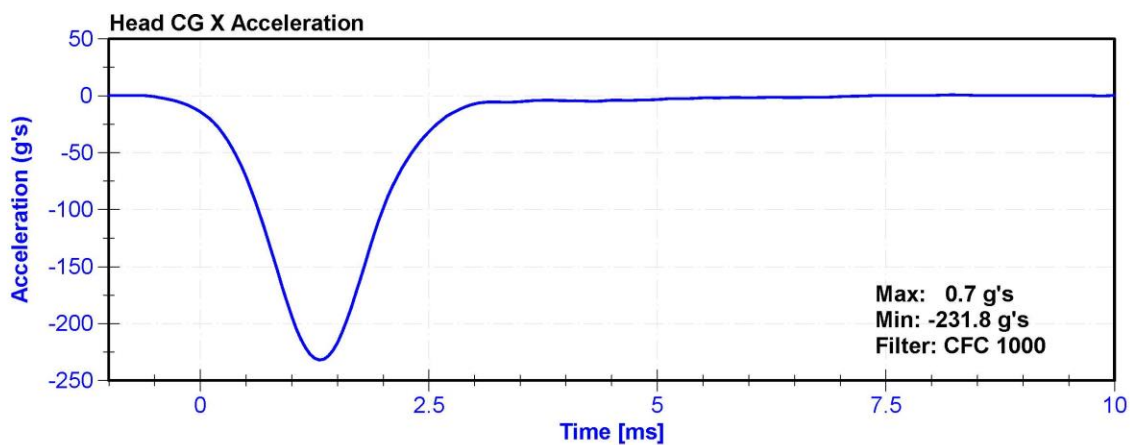


ATD Manufacturer	Denton	Test Technician	M. Dudek
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



Results


Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	23.8	Pass
Velocity	6.89	7.13	m/s	6.903	Pass
Pendulum Impulse at 10ms	2.1	2.5	m/s	2.28	Pass
Pendulum Impulse at 20ms	4.0	5.0	m/s	4.58	Pass
Pendulum Impulse at 30ms	5.8	7.0	m/s	6.55	Pass
Max D Plane Rotation	77	91	deg	79.3	Pass
Max Moment During Rotation Interval	69	83	Nm	73.5	Pass
Moment Decay to 10.0 Nm	80	100	ms	85.8	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/30/2020	1/29/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	Denton 1716A	LC-1916Fx	10/3/2019	10/2/2020

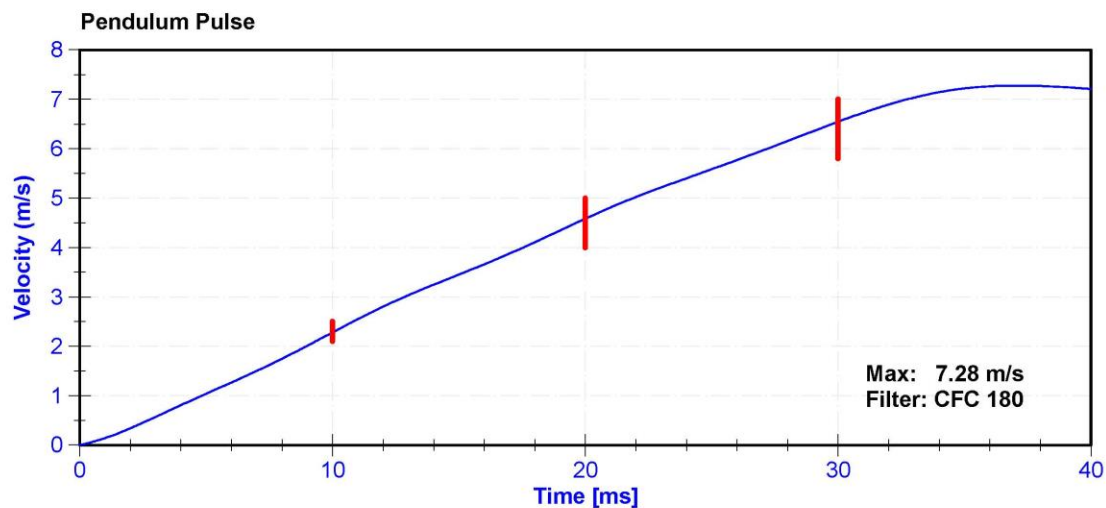

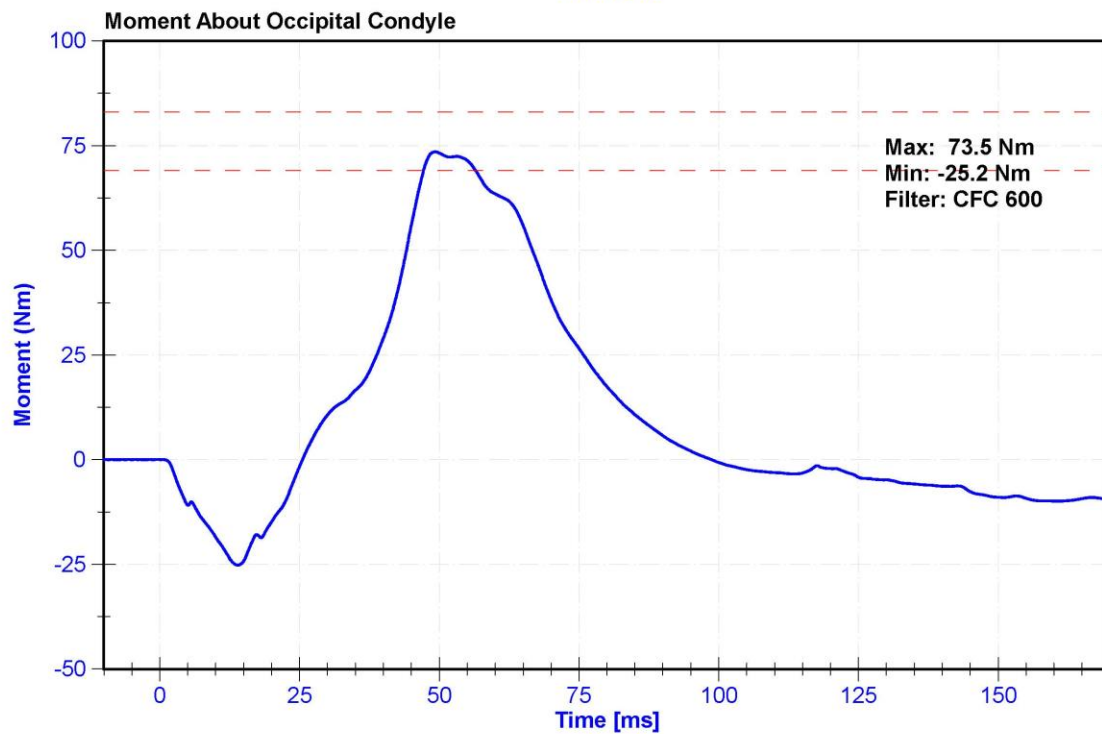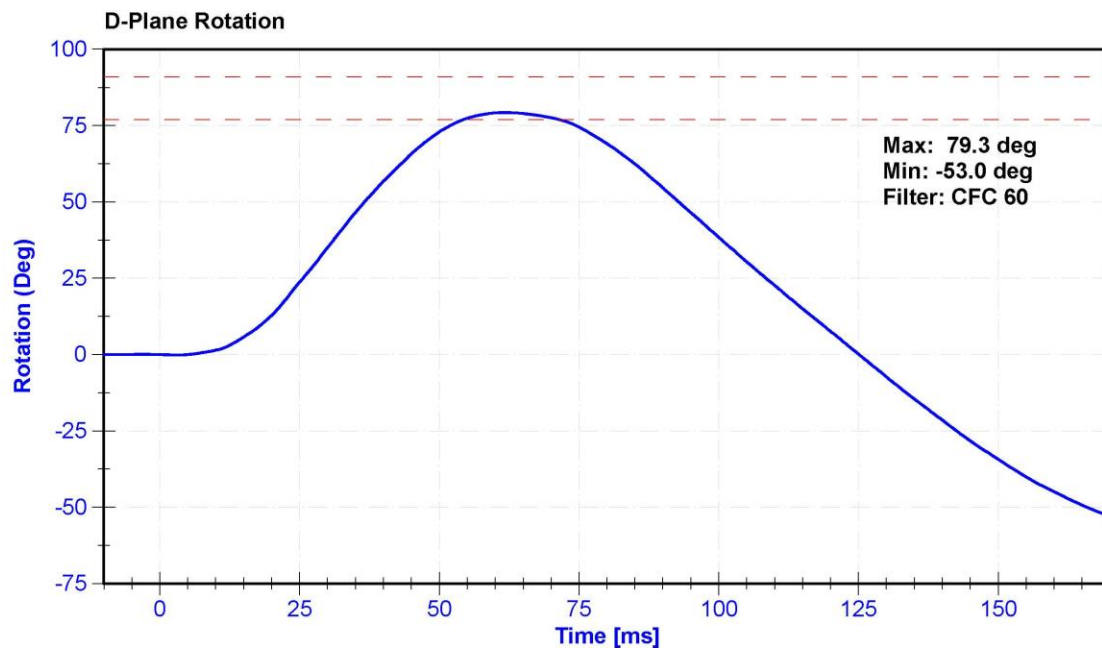

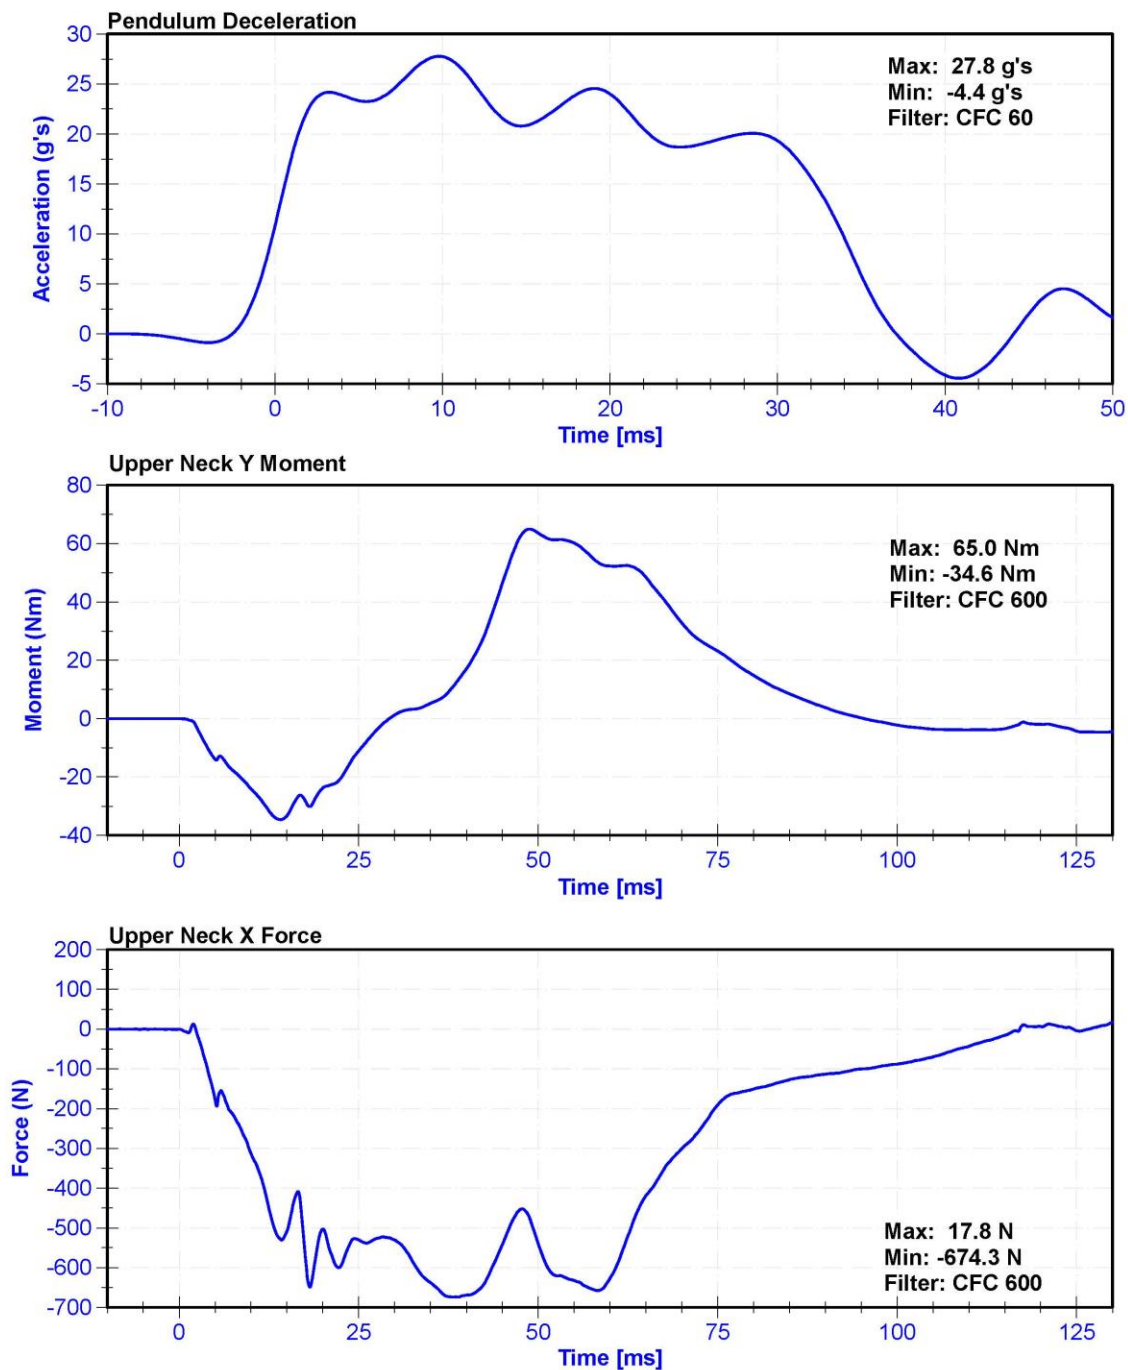


ATD Manufacturer	Denton	Test Technician	M. Dudek
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



Results


Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	22.7	Pass
Velocity	5.95	6.19	m/s	6.005	Pass
Pendulum Impulse at 10ms	1.5	1.9	m/s	1.55	Pass
Pendulum Impulse at 20ms	3.1	3.9	m/s	3.33	Pass
Pendulum Impulse at 30ms	4.6	5.6	m/s	4.91	Pass
D Plane Rotation	99	114	deg	106.0	Pass
Moment During Rotation Interval	-65	-53	Nm	-58.0	Pass
Moment Decay to -10Nm	94	114	ms	98.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/30/2020	1/29/2021
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	Denton 1716A	LC-1916Fx	10/3/2019	10/2/2020

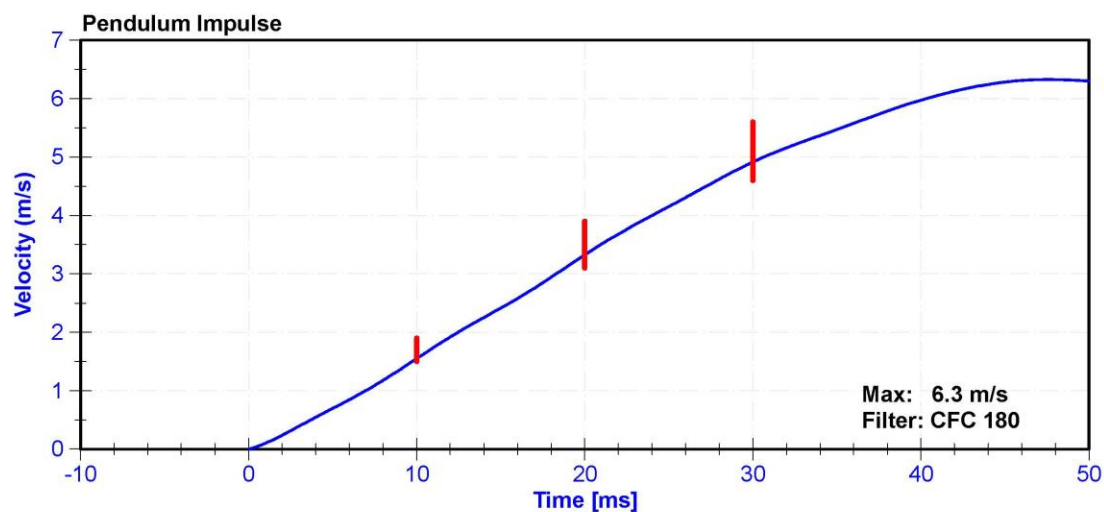

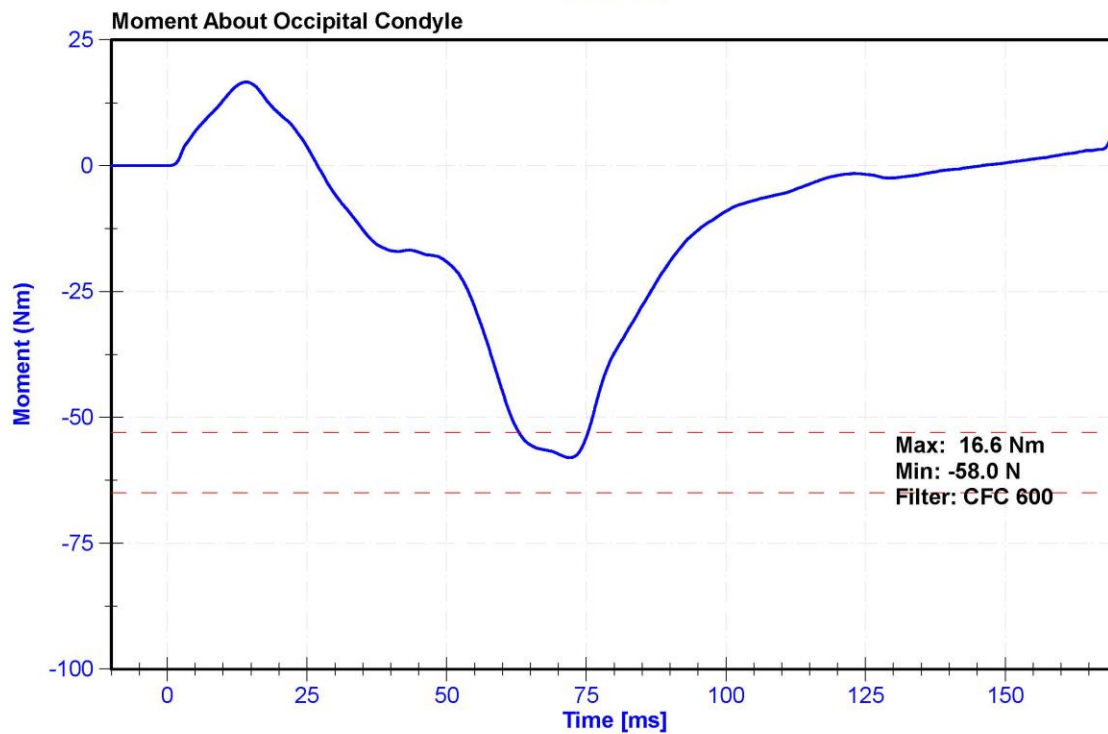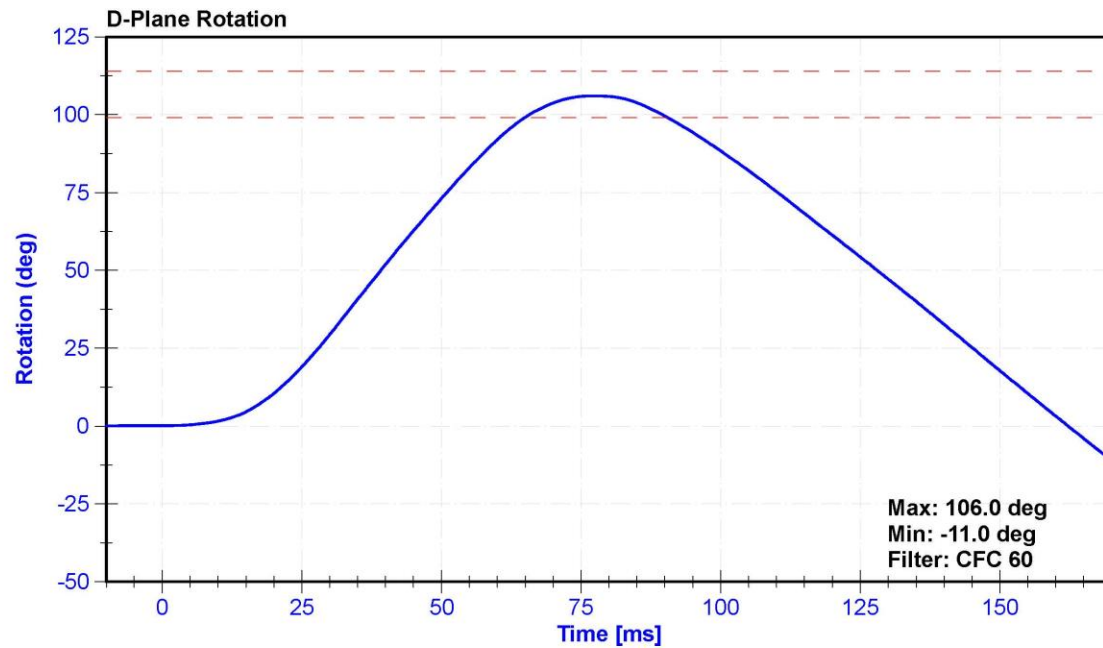

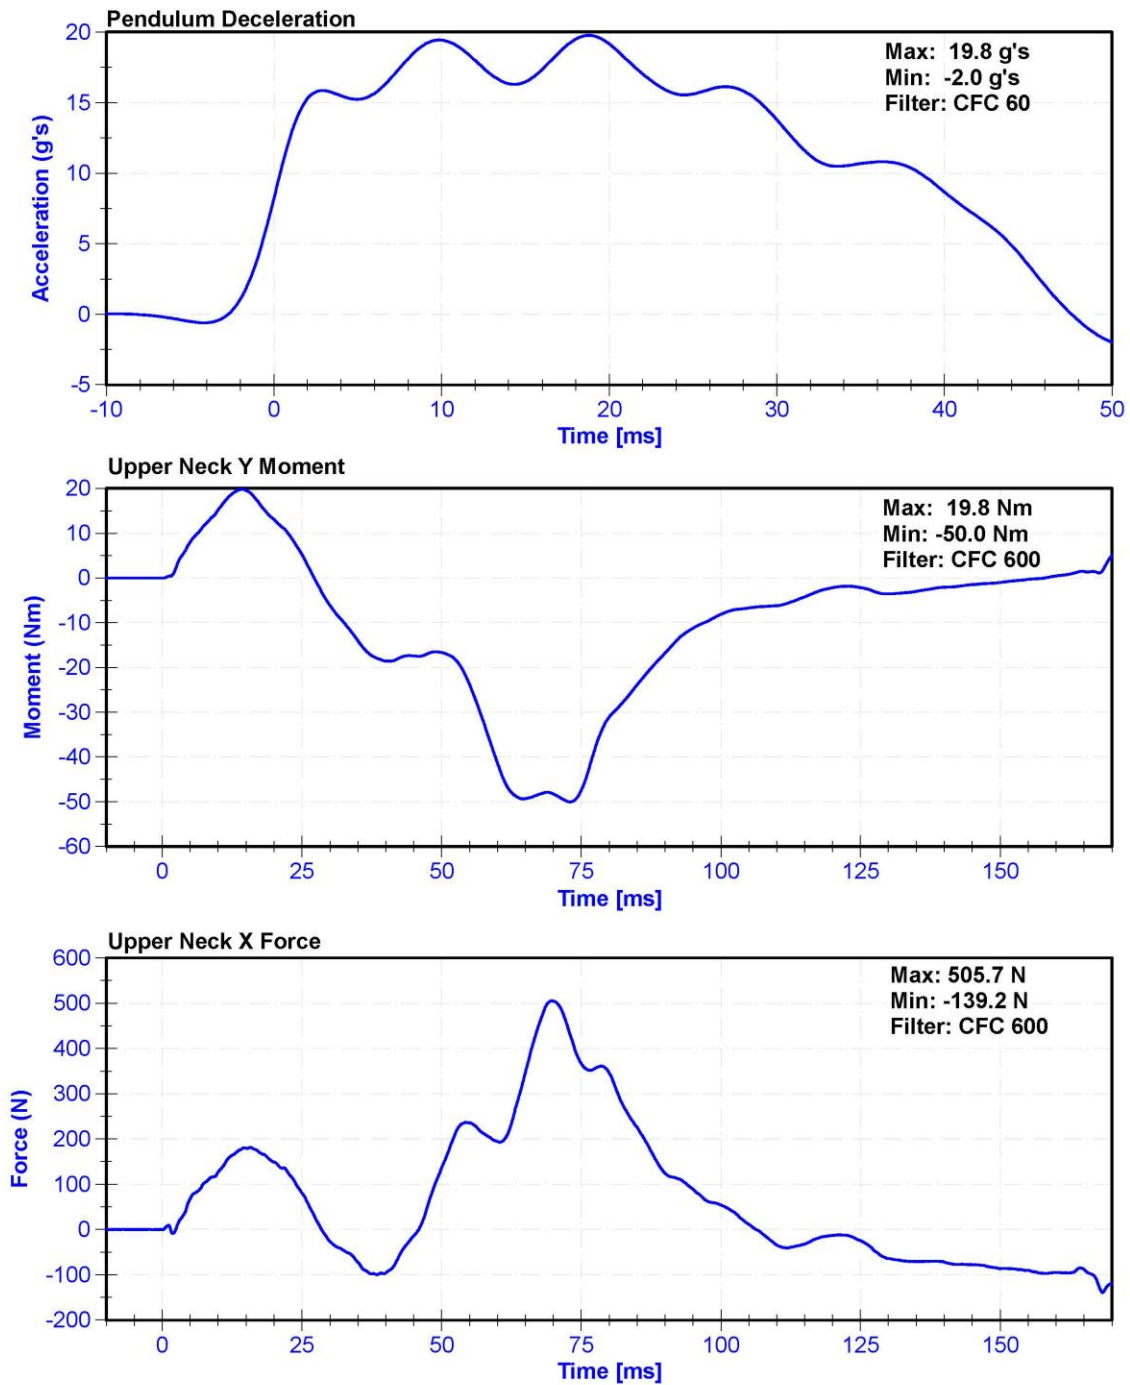


ATD Manufacturer	Denton	Test Technician	E. Helenbrook
ATD Serial Number	139	Laboratory Supervisor	K. Brogan



Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.4	Pass
Humidity	10	70	%	36.4	Pass
Velocity	6.59	6.83	m/s	6.655	Pass
Chest Deflection	-58	-50	mm	-52.6	Pass
Maximum Resistive Force (50 to 58mm)	3900	4400	N	4342.6	Pass
Maximum Resistive Force (18 to 50mm)	0	4600	N	4335.7	Pass
Hysteresis	69	85	%	71.2	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A286228	1/29/2020	7/29/2020
Chest Potentiometer	SERVO 14CB1-2897	DS-288GFE	4/17/2020	10/16/2020

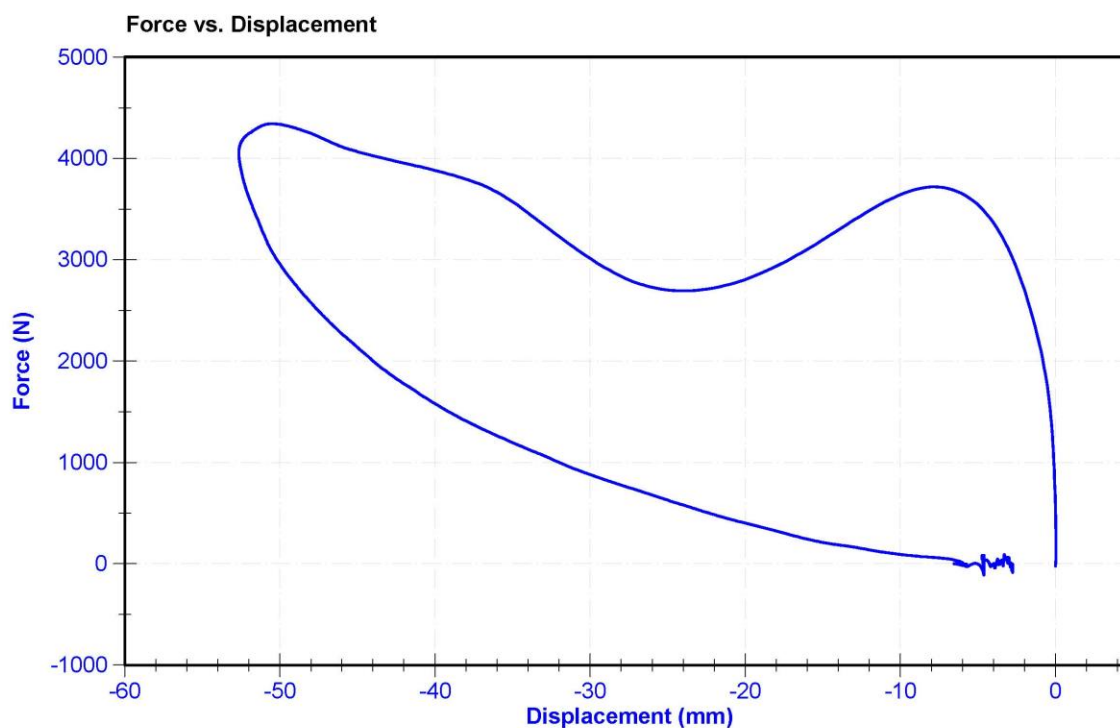

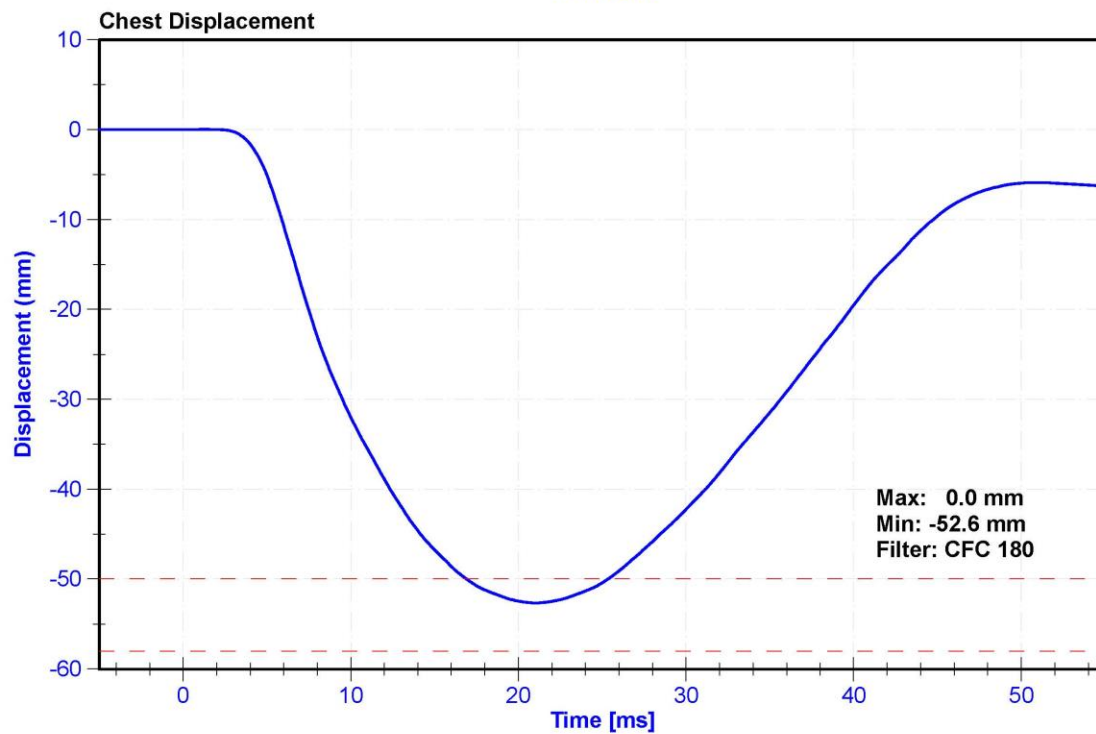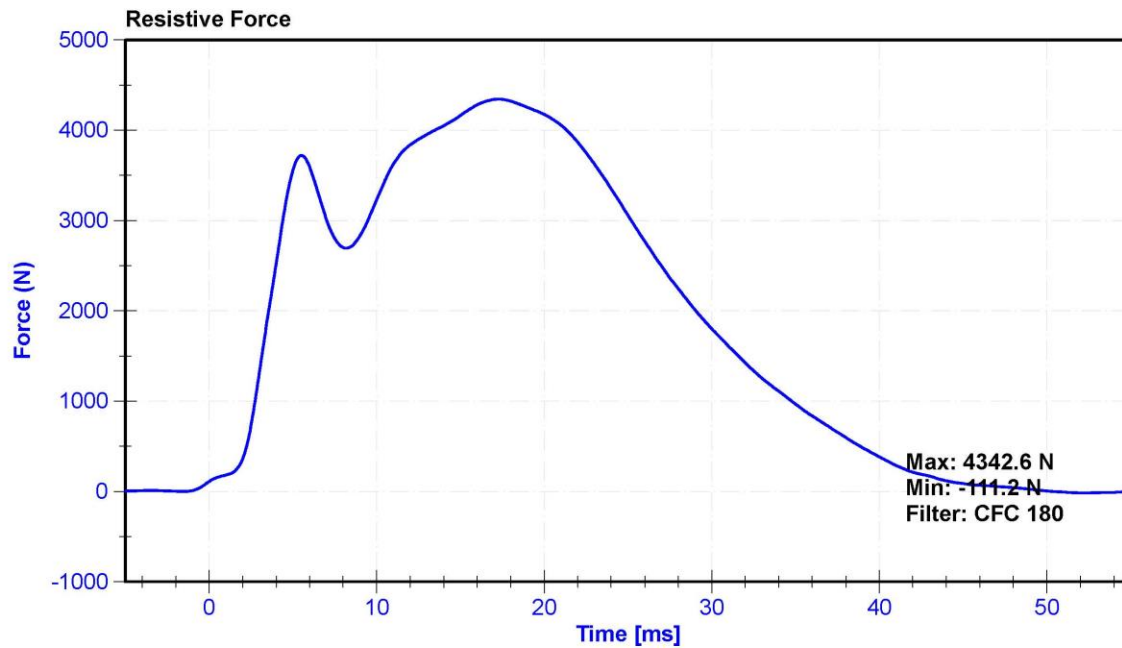

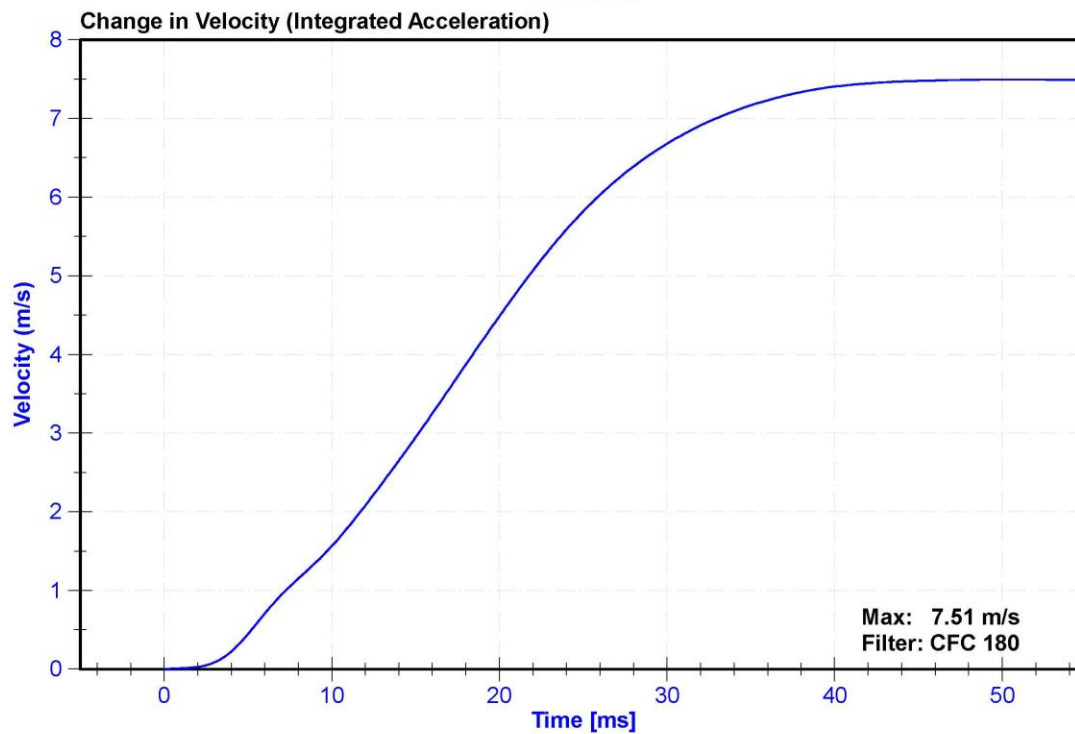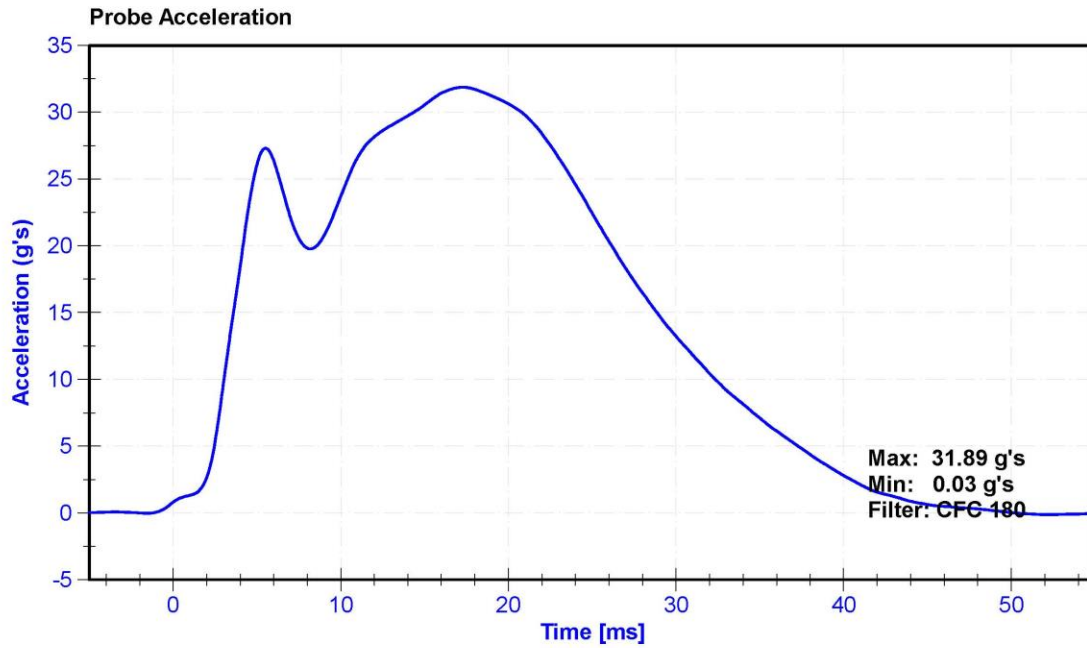


ATD Manufacturer	Denton	Test Technician	E. Helenbrook
ATD Serial Number	139	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.6	25.6	°C	21.1	Pass
Humidity	10	70	%	35.7	Pass
Initial Angle	0	20	deg	15.8	Pass
Force at 45 Degrees	320	390	N	350.7	Pass
Return Angle Relative to Initial	0	8	deg	3.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	Rieker N4C-1	DS-13051548	12/9/2019	12/8/2020
Load Cell	Interface SML-200	LC-493319	1/10/2020	1/9/2021

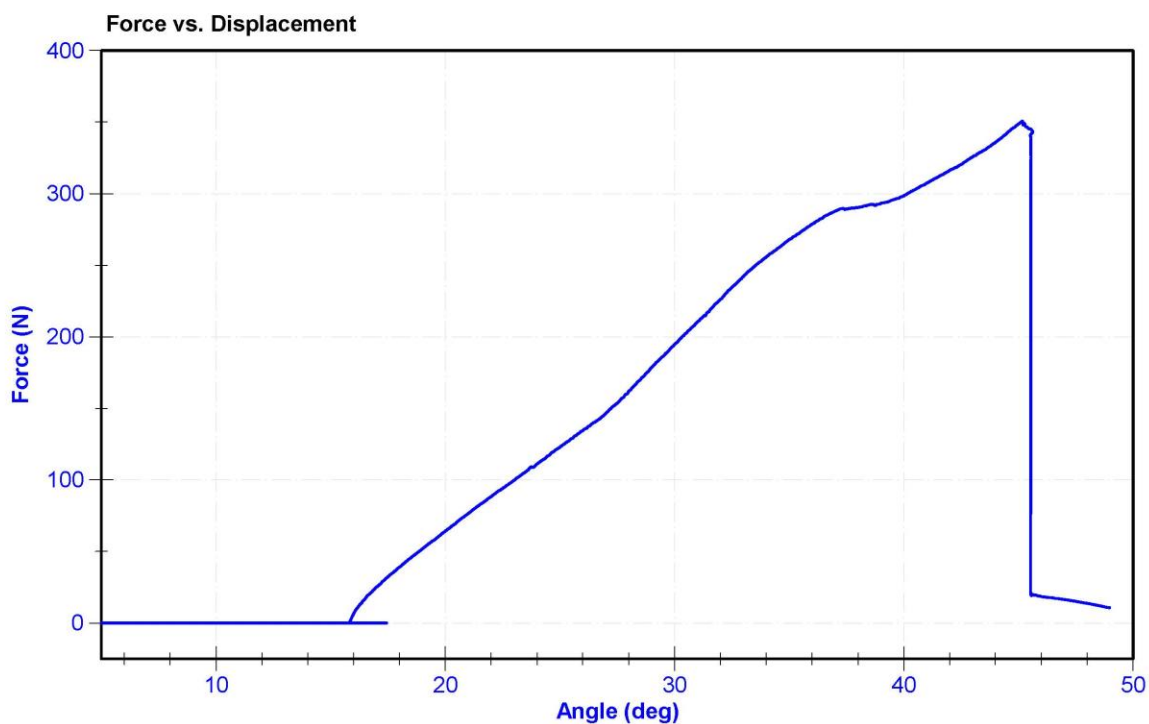


ATD Manufacturer	Denton	Test Technician	D.Reinhard
ATD Serial Number	139	Laboratory Supervisor	K.Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.4	Pass
Humidity	10	70	%	21.0	Pass
Velocity	2.07	2.13	m/s	2.130	Pass
Resistive Force	3450	4060	N	3682.3	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	1/29/2020	7/29/2020

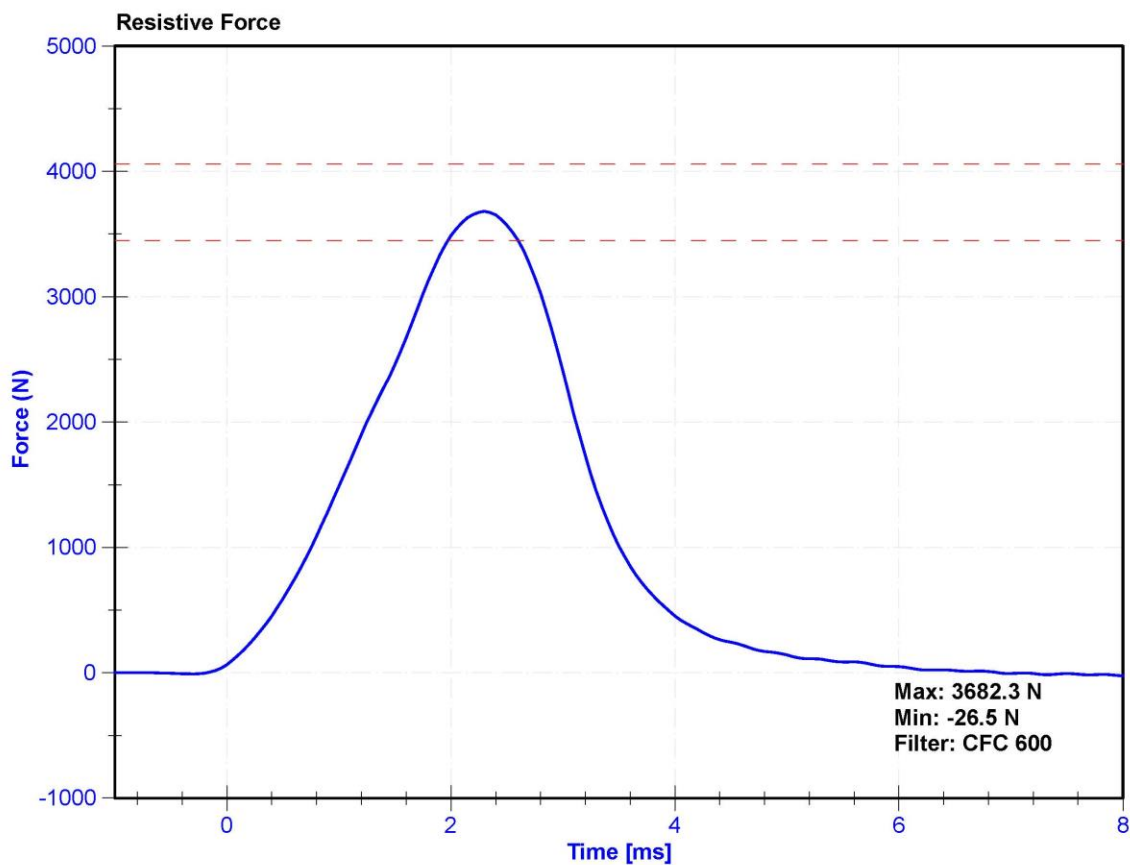

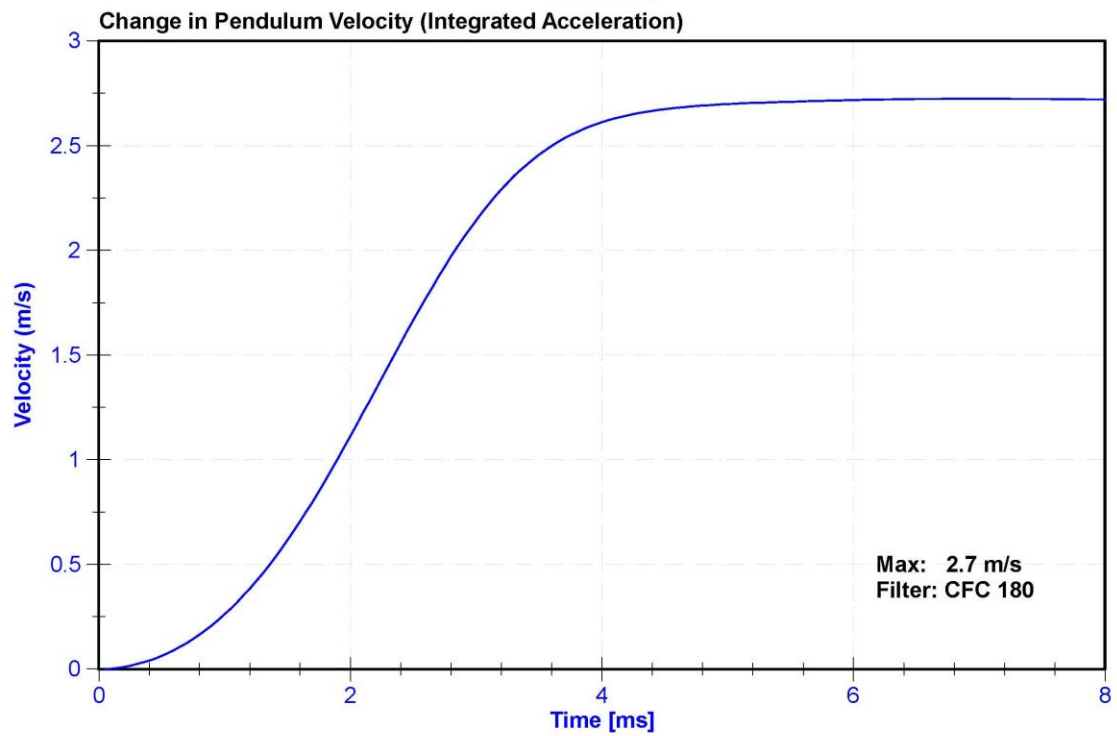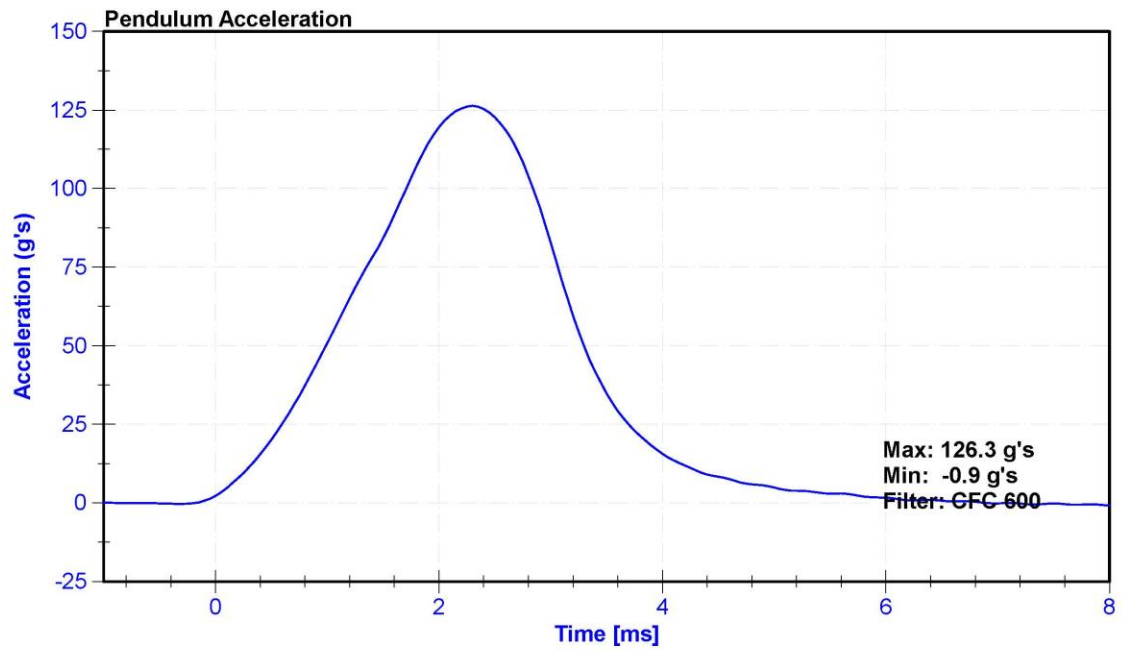


ATD Manufacturer	Denton	Test Technician	D.Reinhard
ATD Serial Number	139	Laboratory Supervisor	K.Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	22.0	Pass
Velocity	2.07	2.13	m/s	2.128	Pass
Resistive Force	3450	4060	N	3675.3	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	1/29/2020	7/29/2020

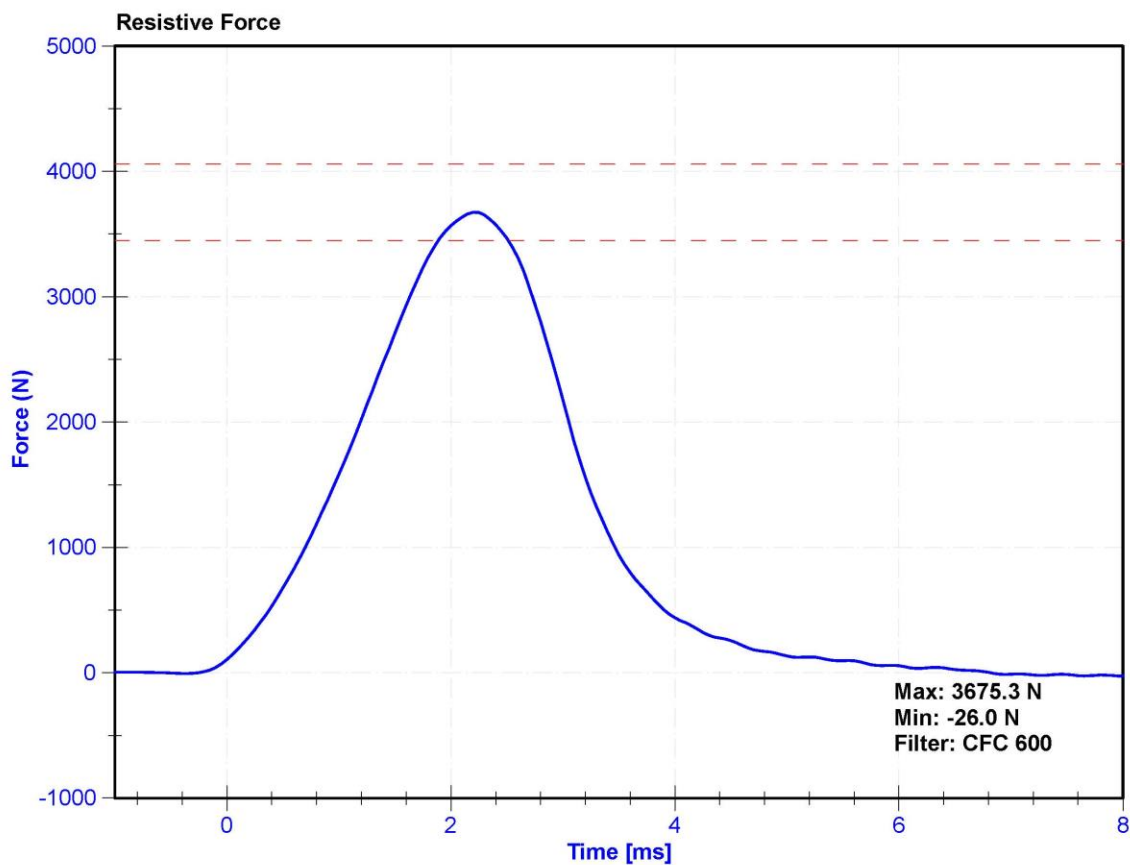

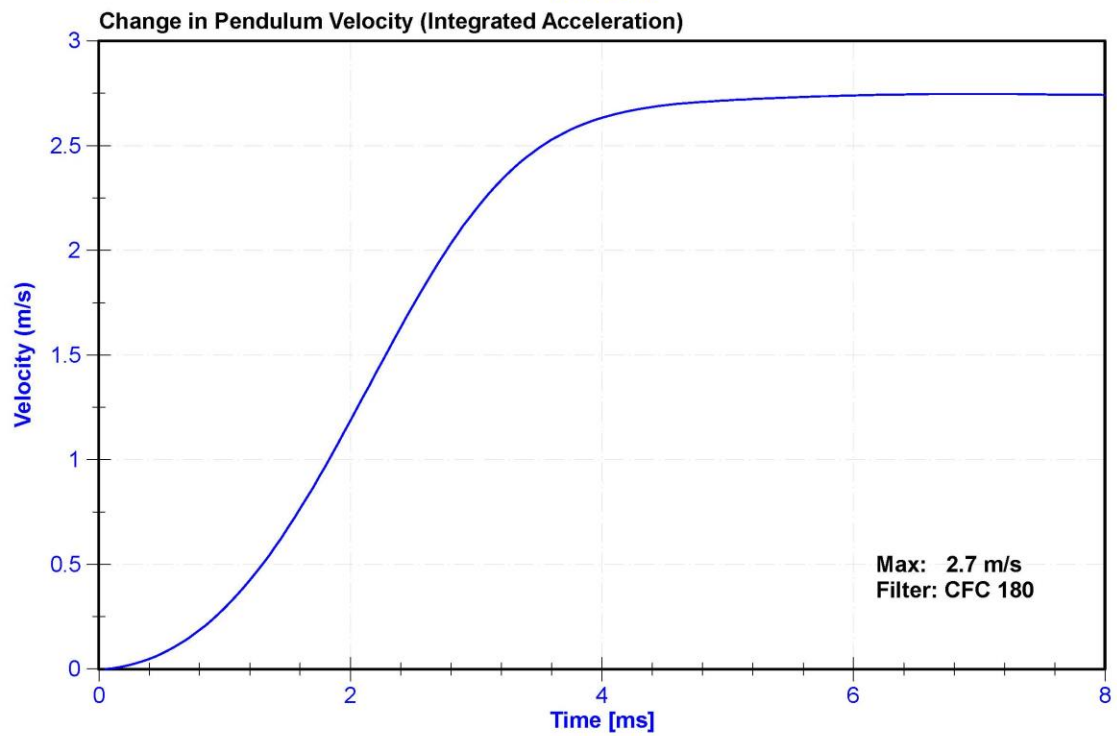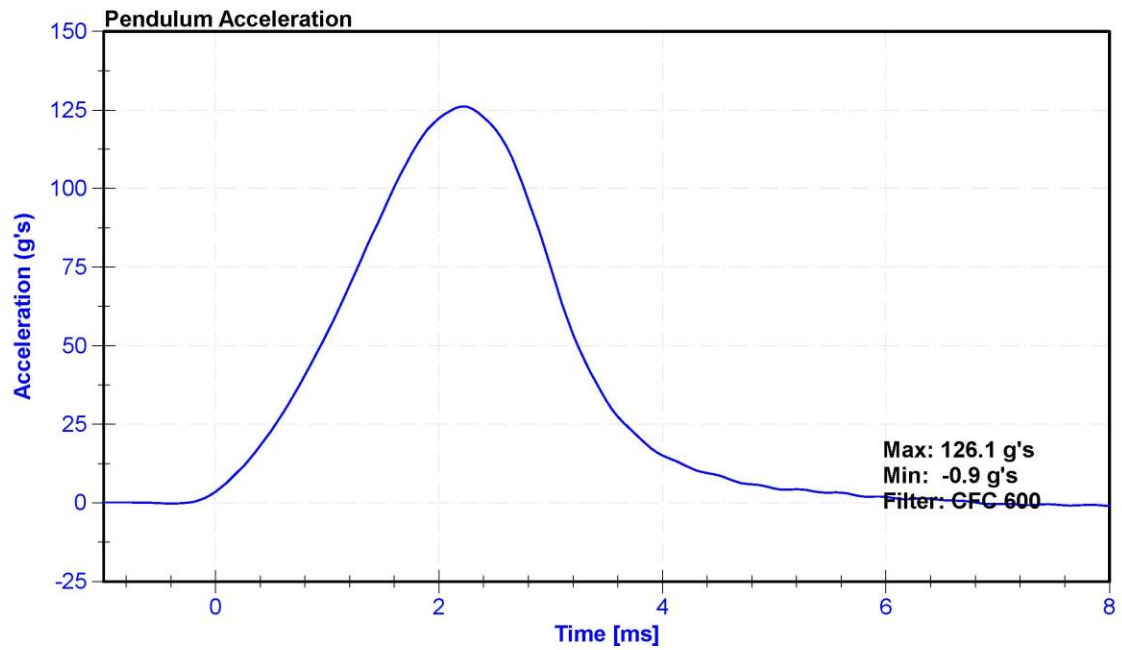

APPENDIX D

DUMMY CALIBRATION AND PERFORMANCE VERIFICATION DATA

Table 1 – Driver Dummy Instrumentation

Instrumentation		Axis/Location	Hybrid III 50 th S/N:142		
			Serial Number	Manufacturer	Calibration Date
Head Accelerometers	Primary	X	P51681	ENDEVCO	4/17/2020
		Y	P64151	ENDEVCO	4/17/2020
		Z	P52114	ENDEVCO	4/17/2020
	Redundant	X	P58833	ENDEVCO	4/17/2020
		Y	P58905	ENDEVCO	4/17/2020
		Z	P63996	ENDEVCO	4/17/2020
Head Angular Rate Sensors		X	ARS-5941 GFE	DTS ARS PRO-18K	7/8/2019
		Y	ARS-6014 GFE	DTS ARS PRO-18K	7/8/2019
		Z	ARS-5990	DTS ARS PRO-18k	7/8/2019
Upper Neck Load Cell		FX, Fy, Fz MX,MY, MZ	LC-280FxGFE	Denton	10/3/2019
Chest Accelerometers	Primary	X	AC-P51994	ENDEVCO	4/17/2020
		Y	AC-P51991	ENDEVCO	4/17/2020
		Z	AC-P49185	ENDEVCO	4/17/2020
	Redundant	X	AC-P51713	ENDEVCO	4/17/2020
		Y	AC-P68059	ENDEVCO	4/17/2020
		Z	AC-P78824	ENDEVCO	4/17/2020
Chest Potentiometer		X	DS-142	Servo	3/27/2020
Pelvis Accelerometer		X	AC-P58800	ENDEVCO	4/17/2020
		Y	AC-P52157	ENDEVCO	4/17/2020
		Z	AC-P52156	ENDEVCO	4/17/2020
Femur Load Cells - Left	Primary	Z	LC-115-1 Fz	Denton	10/3/2019
	Redundant	Z	LC-115-2 Fz	Denton	10/3/2019
Femur Load Cells - Right	Primary	Z	LC-DI4210FZ1	Denton	10/3/2019
	Redundant	Z	LC-DI4210FZ2	Denton	10/3/2019
Tibia Load Cells - Left	Upper	MX, MY, FZ	LC-404Fx	Denton	9/25/2019
	Lower	MX, MY, FZ	LC-396Fz	Denton	9/25/2019
Tibia Load Cells – Right	Upper	MX, MY, FZ	LC-364Fz	Denton	10/3/2019
	Lower	MX, MY, FZ	36440364 FZ	Denton	9/25/2019
Foot Accelerometers - Left	Rear	X	AC-P50084	ENDEVCO	4/20/2020
	Front	Z	AC-P58779	ENDEVCO	4/20/2020
Foot Accelerometers - Right	Rear	X	AC-P51872	ENDEVCO	4/20/2020
	Front	Z	AC-P58893	ENDEVCO	4/20/2020
Seat belt Load Cells	Lap		NA	NA	11/2/2019
	Shoulder		LC-174	FTSS IF-964	5/4/2019

Table 2 – Front Passenger Dummy Instrumentation

Instrumentation		Axis/Location	Hybrid III 5 th S/N:139		
			Serial Number	Manufacturer	Calibration Date
Head Accelerometers	Primary	X	AC-P58780	ENDEVCO	4/17/2020
		Y	AC-P83320	ENDEVCO	4/17/2020
		Z	AC-P58997	ENDEVCO	4/17/2020
	Redundant	X	AC-P58998	ENDEVCO	4/17/2020
		Y	AC-P58749	ENDEVCO	4/17/2020
		Z	AC-P71292	ENDEVCO	4/17/2020
Head Angular Rate Sensors		X	ARS16992	DTS ARS	5/28/2019
		Y	ARS-4712 GFE	DTS ARS	7/8/2019
		Z	ARS11293	DTS ARS	5/28/2019
Upper Neck Load Cell		FX, Fy, Fz MX,MY, MZ	LC-1916Fx	Denton	10/3/2019
Chest Accelerometers	Primary	X	AC-P51965	ENDEVCO	4/15/2020
		Y	AC-P23904	ENDEVCO	4/15/2020
		Z	AC-P50062	ENDEVCO	4/15/2020
	Redundant	X	AC-P52007	ENDEVCO	4/15/2020
		Y	AC-P51259	ENDEVCO	4/15/2020
		Z	AC-P58981	ENDEVCO	4/14/2020
Chest Potentiometer		X	DS-288GFE	SERVO	4/17/2020
Pelvis Accelerometer		X	AC-P49182	ENDEVCO	4/14/2020
		Y	AC-P51220	ENDEVCO	4/14/2020
		Z	AC-P82759	ENDEVCO	4/14/2020
Femur Load Cells - Left	Primary	Z	LC-118Fz1	Denton	10/3/2019
	Redundant	Z	LC-118Fz2	Denton	10/3/2019
Femur Load Cells - Right	Primary	Z	LC-117Fz1	Denton	10/3/2019
	Redundant	Z	LC-117Fz2	Denton	10/3/2019
Tibia Load Cells - Left	Upper	MX, MY, FZ	36430362-FZ	Denton	10/3/2019
	Lower	MX, MY, FZ	36440674-FZ	Denton	10/3/2019
Tibia Load Cells – Right	Upper	MX, MY, FZ	36430486-FX	Denton	10/3/2019
	Lower	MX, MY, FZ	36440495-FZ	Denton	10/3/2019
Foot Accelerometers - Left	Rear	X	AC-P64005	ENDEVCO	4/15/2020
	Front	Z	AC-P64006	ENDEVCO	4/15/2020
Foot Accelerometers - Right	Rear	X	AC-P78669	ENDEVCO	4/15/2020
	Front	Z	AC-P52054	ENDEVCO	4/15/2020
Seat belt Load Cells	Lap		NA	NA	NA
	Shoulder		NA	NA	NA

Table 3 – Vehicle Instrumentation

Instrumentation			Axis	Serial Number	Manufacturer	Calibration Date
Crossmember/Rear Seat Accelerometers	Left	Primary	X	AC-A280325	MSI 1201-1000	1/13/2020
			Z	A284319	MSI 1201-1000	1/13/2020
		Redundant	X	AC-A280900	MSI 1201-1000	1/13/2020
	Right	Primary	X	AC-A280018	MSI 1201-1000	12/18/2019
			Z	AC-A281033	MSI 1201-1000	1/14/2020
		Redundant	X	AC-A280326	MSI 1201-1000	12/2/2019
Engine Accelerometers	Top		X	AC-A280198	MSI 1201-1000	2/18/2020
	Bottom		X	A315784	MSI 1201-1000	2/4/2020