


REPORT NUMBER: TWG-CAL-18-05

NEW CAR ASSESSMENT PROGRAM (NCAP)
SIDE AIRBAG OUT-OF-POSITION INJURY TESTING

Ford Motor Co.
2018 Ford EcoSport

NHTSA NUMBER: M20180202TWG2
CALSPAN TEST NUMBER: CT2018-05

PREPARED BY:
CALSPAN CORPORATION
4455 Genesee St.
BUFFALO, NEW YORK 14225

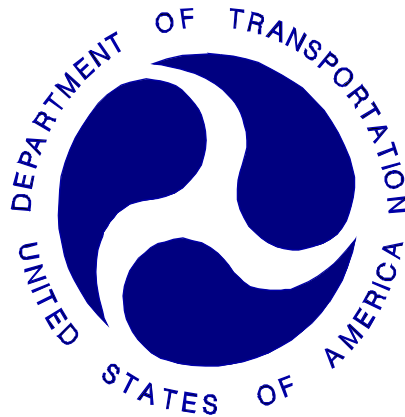

November 14, 2018

DRAFT REPORT

Alpha Technology Associate, Inc.
2810 Old Lee Highway, Suite 120
Fairfax, VA 22031

This Final Test Report was prepared for the U.S. Department of Transportation, National Highway Traffic Safety Administration, under Contract No. DTNH22-13-D-00311L, Alpha Technology PO 12GC150. This document is disseminated under the sponsorship of the U.S. Department of Transportation in the interest of information exchange. The United States Government assumes no liability for its contents or use thereof.

Prepared By: Zachary Granby
Zachary Granby, Test Engineer

Approved By: Vanessa Hansen
Vanessa Hansen, Program Manager

Approval Date: November 14, 2018

FINAL REPORT ACCEPTANCE BY:

Accepted By: _____

Acceptance Date: _____

TECHNICAL REPORT STANDARD TITLE PAGE

1. Report No. TWG-CAL-18-05	2. Government Accession No.	3. Recipient's Catalog No.				
4. Title and Subtitle Final Report 2018 Ford Ecosport, TWG/Out-of-Position Tests NHTSA No.: M20180202TWG2		5. Report Date November 14, 2018				
		6. Performing Organization Code CAL				
7. Author(s) Vanessa Hansen, Program Manager Zachary Granby, Test Engineer		8. Performing Organization Report No. CT2018-05				
9. Performing Organization Name and Address Calspan Corporation 4455 Genesee St. Buffalo, New York 14225		10. Work Unit No.				
		11. Contract or Grant No. DTNH22-13-D-00311L				
12. Sponsoring Agency Name and Address Alpha Technology Associate, Inc. 2810 Old Lee Hwy, Suite 120 Fairfax, VA 22031		13. Type of Report and Period Covered Final Report, November 14, 2018				
		14. Sponsoring Agency Code NRM-110				
15. Supplementary Notes						
16. Abstract This side impact Out-Of-Position test was performed in conjunction with a New Car Assessment Program (NCAP). This test was conducted at the Calspan Test Facility in Buffalo, New York, on July 19, 2018.						
Injury Summary						
HIC15	Maximum Chest Displacement (mm)	Maximum Chest Displacement Rate (m/s)	NIJ(NTF)	NIJ(NTE)	NIJ(NCF)	NIJ(NCE)
13.98	N/A	N/A	0.042	0.106	0.177	0.352
17. Key Words New Car Assessment Program (NCAP) Side Airbag Out-Of-Position			18. Distribution Statement <u>Copies of this report are available from:</u> Alpha Technology Associate, Inc. 2810 Old Lee Hwy, Suite 120 Fairfax, VA 22031 Phone: (703) 876-0010 Fax: (703) 876-0120			
19. Security Classification of Report UNCLASSIFIED		20. Security Classification of Page UNCLASSIFIED		21. No. of Pages 31	22. Price	

TABLE OF CONTENTS

<u>Section</u>		<u>Page No.</u>
1	PURPOSE AND SUMMARY OF TEST	1-1
2	DATA SHEETS	2-1
	Data Sheet 1 – Test Summary	2-1
	Data Sheet 2 – Vehicle Parameter Data	2-2
	Data Sheet 3 – Dummy Positioning in Vehicle	2-3
	Data Sheet 4 – Dummy Injury Criteria Values	2-4
A	PHOTOGRAPHS	A-1
B	DUMMY RESPONSE DATA TRACES	B-1
C	TEST EQUIPMENT LIST AND CALIBRATION INFORMATION	C-1

SECTION 1

PURPOSE AND SUMMARY OF TEST:

1.1 PURPOSE

The purpose of this test was to obtain data from a static out-of-position side impact using a vehicle that had previously undergone a New Car Assessment Program (NCAP) sponsored side MDB impact test requested by the National Highway Traffic Safety Administration (NHTSA). This test was performed under NHTSA contract No. DTNH22-13-D-00311L and through Alpha Technology Associate, Inc.

1.2 SUMMARY

The effects of both a seat-mounted side airbag and a curtain airbag deployment in a 2018 Ford EcoSport on an out-of-position SID-IIs ATD were evaluated. The test was performed by Calspan on July 19, 2018. Pre-and post-test photographs of the vehicle and ATD can be found in Appendix A.

Three high-speed digital cameras were used to document the side airbag deployment event. Images were recorded at rates of 1000 frames per second. The cameras were placed perpendicular to the right-front passenger seat centerline, Oblique, and through the passenger window to capture the deployment event from various positions.

The SID-IIs anthropomorphic test device (ATD) was placed in the right front (passenger) seat facing toward the center of the vehicle with its arm against the seatback according to the ATD placement instructions specified by Alpha Technology Associate, Inc. who referenced the Recommended Procedures for Evaluating Occupant Injury Risk from Deploying Side Airbags as prepared by the Side Airbag Out-of-Position Injury Technical Working Group (TWG). This orientation complies with section 3.3.5.3 of the TWG Recommended Procedures for Evaluating Occupant Injury Risk from Deploying Side Airbags as defined by Lund, et al and the Technical Working Group First Revision dated July, 2003.

The SID-IIs ATD was instrumented with head x, y and z accelerometers. In addition, a six axis upper and lower neck load cell sensor was utilized to record the resulting neck forces and moments during the event.

Twelve channels of data were recorded using an on-board data acquisition system. Appendix A contains photographs. Appendix B contains ATD response data traces. Appendix C contains the Instrumentation Data Channel assignments.

SECTION 2

DATA SHEET NO. 1 TEST SUMMARY

TEST CONFIGURATION INFORMATION:

Seating Position:	P2	Right Front Seating Position
Test:	3.3.5.3	Roof Rail Mounted – Inboard facing SID IIs on Raised Seat
Airbag: 1	Curtain	Roof Rail Mounted – Passenger Side
Airbag: 2	Seat/Torso	Passenger Seat Mounted – Outside Seam
Booster Block:	N/A	N/A
ATD Type/Serial No.:	DG8012	SID IIs

Number of Data Channels:	12	
Number of Cameras:	0	<u>Real Time</u>
	3	<u>High Speed Digital</u>

PRE-TEST VISIBLE DUMMY CONTACT POINTS

Head Contact:	None
Upper Torso Contact:	Shoulder contacts Seatback
Lower Torso Contact:	Seatback
Knee Contact:	Seatback & Seatpan
Foot Contact:	Drivers Seatpan

POST-TEST VISIBLE DUMMY CONTACT POINTS

Head Contact:	Curtain Airbag
Upper Torso Contact:	Torso Airbag & Seatback
Lower Torso Contact:	Torso Airbag & Seatback
Knee Contact:	Seatback & Seatpan
Foot Contact:	Drivers Seatpan

DATA SHEET NO. 2
VEHICLE PARAMETER DATA

TEST VEHICLE INFORMATION:

Year/Make/Model/Body Style: 2018 Ford EcoSport SUV

NHTSA No. : M20180202TWG2 ; VIN: MAJ3P1RE7JC175171 Color: Silver

Engine Data: 14 cylinders; - CID; 1.0 Liters; - cc

Placement: - Longitudinal or In-Line; X Transverse or Lateral

Transmission Data: 6 speeds; - Manual; X Automatic; X Overdrive

Final Drive: - Rear Wheel Drive; X Front Wheel Drive; - Four Wheel Drive

Safety Belt Features – Driver X Pretensioner (Shoulder); X Load Limiter; X Adj. Anchorage

Safety Belt Features - Passenger X Pretensioner (Shoulder); X Load Limiter; X Adj. Anchorage

Major Options: X A/C; X Pwr. Steering.; X Pwr. Brakes

X Pwr. Windows; X Pwr. Door Locks; X Tilt Wheel

Date Received: 4/13/2018 ; Odometer Reading 209.215 Km

Selling Dealer: Kayser Ford Lincoln

& Address: P.O. Box 1526 Madison WI 53701

DATA FROM TIRE VEHICLE'S CERTIFICATION LABEL:

Vehicle Manufactured by: Ford Motor Co.

Date of Manufacture 11/17

GVWR: 1810 kg; GAWR: 955 kg FRONT; 865 kg REAR

DATA FROM TIRE PLACARD:

Recommended Tire Size: 205/60R16

*Recommended Cold Tire Pressure: 240 kPa Front 240 kPa Rear

DATA FROM TIRE SIDEWALL:

Size of Tires on Test Vehicle: 205/60R16 ; Manufacturer: Bridgestone

Tire Pressure with Maximum Capacity Vehicle Load: Front 300 kPa Rear: 300 kPa

Treadwear: 600 ; Traction: A ; Temperature: A

VEHICLE CAPACITY DATA:

Type of Front Seats: - Bench; X Bucket; - Split Bench

Number of Occupants: 2 Front; 3 Rear; 5 Total

Vehicle Capacity Weight (VCW) = 375 Kg

No. of Occupants x 68.04 kg = 340.2 Kg

Rated Cargo/Luggage Weight (RCLW) = 34.8 Kg

*Tire pressure used for test

‡Vehicle had previously undergone a New Car Assessment Program Side MDB NCAP Test.

DATA SHEET NO. 3
SID-IIs Dummy POSITIONING IN VEHICLE

NHTSA No. M20180202TWG2

Measurement	Value
Total Fore/Aft Travel (mm)	228
Test Distance Rearward of Full-Forward (mm)	0
Total Fore/Aft Travel (Detents)	35
Placed in Position #	0

Seat Back Angle (headrest post)	SA (-5.3°)	Value
Airbag Module Width	AMW (mm)	-
Airbag Width	ABW (mm)	-
Airbag Module Length	AML (mm)	-
Airbag Length	ABL (mm)	-
Top of Airbag Module to Head/Neck Junction	AN (mm)	240
Head CG to Door Panel/Side Window	HD (mm)	186
Head to Seat Back Centerline	HSC (mm)	220
Head to B-Pillar (cg)	HB (mm)	215
Head to Roof, Z (top of the head)	HZ (mm)	128
Head to Header	HHH (mm)	50
Chest to Dash	CD (mm)	525
Chest to Seatback	CS (mm)	-
Right Arm to Seat Back Centerline	RACL (mm)	-
Right Arm to Seat Back Centerline	RACL (deg)	-
Left Arm to Door Panel	LA (mm)	-
Knee to Knee	KK (mm)	180
Toe to Toe	TT (mm)	135
Right Knee to Seat Cushion Centerline	KSCR (mm)	-
Left Knee to Seat Cushion Centerline	KSCL (mm)	-
Right Toe to Seat Cushion Centerline	TSCR (mm)	-
Left Toe to Seat Cushion Centerline	TSCL (mm)	-

DATA SHEET 4
SID-IIs Dummy INJURY CRITERIA VALUES

NHTSA No.: M20180202TWG2

Channel	Units	Max	Time (ms)	Min	Time (ms)
V1P2 Head x [CFC_1000]	g's	50.12	13.15	-2.48	143.95
V1P2 Head y [CFC_1000]	g's	29.60	13.15	-15.98	13.40
V1P2 Head z [CFC_1000]	g's	64.19	13.20	-9.35	16.85
V1P2 Headform Resultant [CFC_1000]	g's	83.67	13.15	0.00	-20.30
V1P2 Upper Neck Mocy [CFC_600]	Nm	4.11	118.65	-17.41	32.80
V1P2 Upper Neck Ntf [CFC_600]	-	0.04	116.25	0.00	-50.00
V1P2 Upper Neck Nte [CFC_600]	-	0.11	61.25	0.00	-50.00
V1P2 Upper Neck Ncf [CFC_600]	-	0.18	20.25	0.00	-49.85
V1P2 Upper Neck Nce [CFC_600]	-	0.35	32.70	0.00	-50.00
V1P2 Upper Neck Nij [CFC_600]	-	0.35	32.70	0.00	-47.60
V1P2 Upper Neck Fx [CFC_1000]	N	252.67	13.25	-62.04	21.60
V1P2 Upper neck Fy [CFC_1000]	N	221.76	19.55	-59.66	124.10
V1P2 Upper neck Fz [CFC_1000]	N	75.20	94.20	-950.59	16.10
V1P2 Neck Force Resultant [CFC_1000]	N	974.74	16.10	0.07	-38.50
V1P2 Upper Neck Mx [CFC_600]	Nm	9.51	64.95	-15.53	14.40
V1P2 Upper Neck My [CFC_600]	Nm	4.99	118.90	-16.47	32.85
V1P2 Upper Neck Mz [CFC_600]	Nm	3.83	151.45	-5.27	85.50
V1P2 Neck Moment Resultant [CFC_600]	Nm	16.59	32.80	0.00	-3.90
V1P2 Lower Neck Fx F [CFC_1000]	N	-	-	-	-
V1P2 Lower Neck Fy F [CFC_1000]	N	-	-	-	-
V1P2 Lower Neck Fz F [CFC_1000]	N	-	-	-	-
V1P2 Lower Neck Force Resultant [CFC_1000]	N	-	-	-	-
V1P2 Lower Neck Mx F [CFC_600]	Nm	-	-	-	-
V1P2 Lower Neck My F [CFC_600]	Nm	-	-	-	-
V1P2 Lower Neck Mz F [CFC_600]	Nm	-	-	-	-
V1P2 Lower Neck Moment Resultant [CFC_600]	Nm	-	-	-	-
Curtain Airbag Volts	V	20.33	0.55	-10.13	0.00
Torso/Pelvis Airbag Volts	V	11.09	1.70	-14.69	2.50
Front Center Airbag Volts	V	-	-	-	-
Curtain Airbag Current	A	1.30	0.70	-2.22	39.55
Torso/Pelvis Airbag Current	A	1.58	2.50	-1.81	194.25
Front Center Airbag Current	A	-	-	-	-

DATA SHEET 4

SID-IIs DUMMY INJURY CRITERIA VALUES (CONTINUED)

VEHICLE: 2018 Ford EcoSport

NHTSA No.: M20180202TWG2

HEAD INJURY CRITERIA (HIC)

	HIC15			
	HIC(15)	t ₁ (msec)	t ₂ (msec)	Average Acceleration t ₁ to t ₂
Position P2	13.98	13.00	13.40	69.36

THORAX CRITERIA

	Critical Values	Actual	Time(ms)
Maximum Deflection (mm)	N/A	N/A	N/A
Maximum Deflection Rate (m/s)	N/A	N/A	N/A

Position P2 - Neck Injury Summary (H3 – 3 year Old – In Position)

Nij V10	Nij	Time (ms)	Z Force (N)	X Force (N)	Y Moment (N-m)
Ntf	0.042	116.250	61.743	47.544	4.873
Nte	0.106	61.250	0.538	0.393	-6.472
Ncf	0.177	20.250	-686.241	-43.650	-0.766
Nce	0.352	32.700	-260.457	53.206	-16.454

Peak Tension (CFC1000) 75.202 N

Peak Compression (CFC1000) -950.590 N

Critical Values

Nij Intercepts				Peak Limits	
Tension (CVt)	3880.00 N	Extension (mCVe)	61.00 N-m	Tension	2070.00 N
Compression (CVc)	3880.00 N	Flexion (mCVf)	155.00 N-m	Compression	2520.00 N

Appendix A

PHOTOGRAPHS

TABLE OF PHOTOGRAPHS

<u>Figure</u>	<u>Photograph Title</u>	<u>Page</u>
Figure A- 1	Right ¾ Front View of Vehicle, As Received	A- 3
Figure A- 2	Vehicle Certification Placard	A- 3
Figure A- 3	Pre-Test SID-IIs Left Side View	A- 4
Figure A- 4	Post-Test SID-IIs Left Side View	A- 4
Figure A- 5	Pre-Test SID-IIs Left Side Close-up View	A- 5
Figure A- 6	Post-Test SID-IIs Left Side Close-up View	A- 5
Figure A- 7	Pre-Test SID-IIs Front View	A- 6
Figure A- 8	Post-Test SID-IIs Front View	A- 6
Figure A- 9	Pre-Test SID-IIs Left ¾ Front View	A- 7
Figure A- 10	Post-Test SID-IIs Left ¾ Front View	A- 7
Figure A- 11	Pre-Test SID-IIs Right Side View	A- 8
Figure A- 12	Post-Test SID-IIs Right Side View	A- 8
Figure A- 13	Post-Test Curtain Airbag View	A- 9
Figure A- 14	Post-Test Seat Airbag View	A- 9
Figure A- 15	Impact Event	A- 10



Figure A-1: Right ¾ Front View of Vehicle, As Received

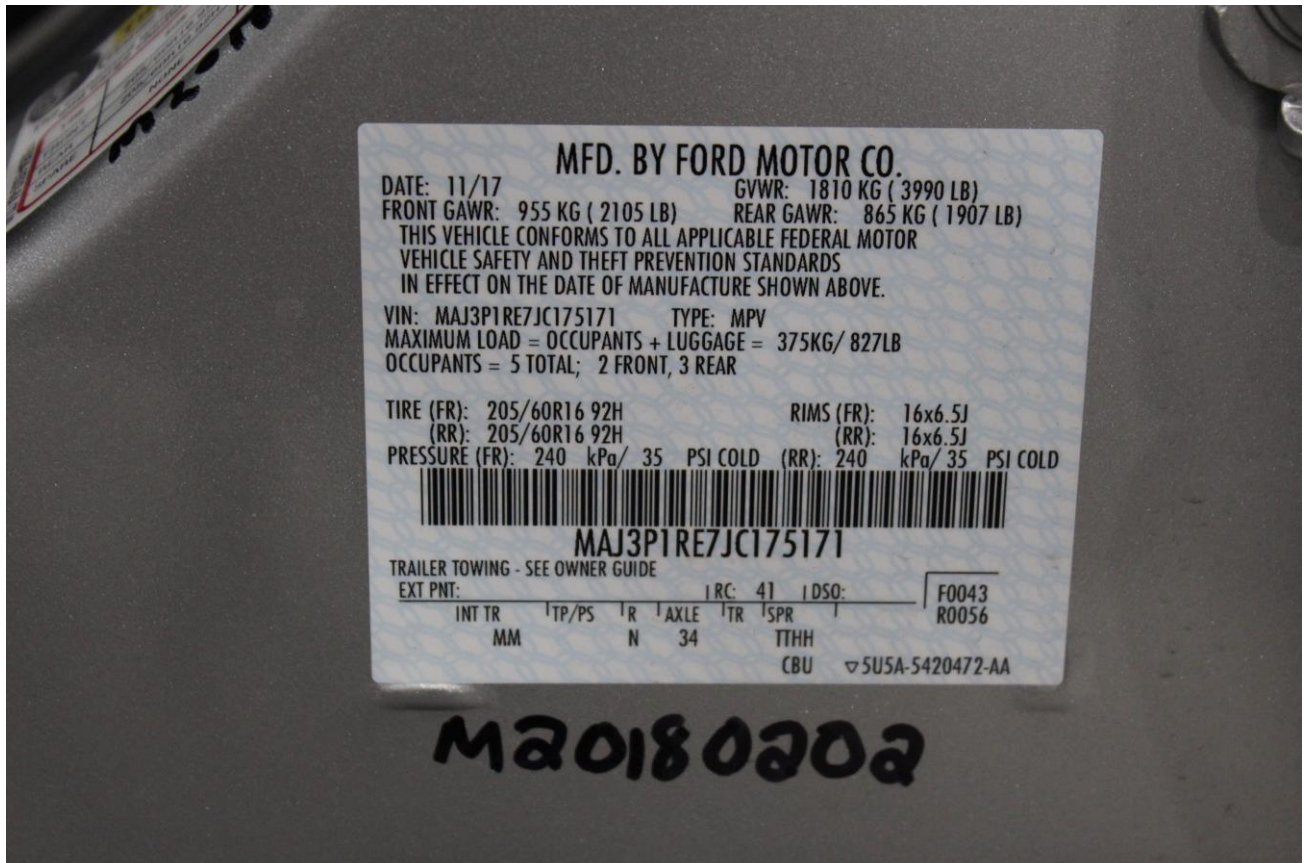


Figure A-2: Vehicle Certification Placard



Figure A-3: Pre-Test SID-IIs Left Side View



Figure A-4: Post-Test SID-IIs Left Side View



Figure A-5: Pre-Test SID-IIs Left Side Close-up View



Figure A-6: Post-Test SID-IIs Left Side Close-up View



Figure A-7: Pre-Test SID-IIs Front View



Figure A-8: Post-Test SID-IIs Front View



Figure A-9: Pre-Test SID-IIs Left $\frac{3}{4}$ Front View



Figure A-10: Post-Test SID-IIs Left $\frac{3}{4}$ Front View



Figure A-11: Pre-Test SID-III Right Side View



Figure A-12: Post-Test SID-III Right Side View



Figure A-13: Post-Test Curtain Airbag View



Figure A-14: Post-Test Seat Airbag View







Figure A-15: Impact Event





APPENDIX B





VEHICLE & DUMMY RESPONSE DATA TRACES





Table of Data Plots





No.	Description	Page
Plot 1	Head CG X Acceleration	B-3
Plot 2	Head CG Y Acceleration	B-3
Plot 3	Head CG Z Acceleration	B-3
Plot 4	Head CG Acceleration Resultant	B-3
Plot 5	Head CG Redundant X Acceleration	B-4
Plot 6	Head CG Redundant Y Acceleration	B-4
Plot 7	Head CG Redundant Z Acceleration	B-4
Plot 8	Head CG Redundant Resultant Acceleration	B-4
Plot 9	Upper Neck X Force	B-5
Plot 10	Upper Neck Y Force	B-5
Plot 11	Upper Neck Z Force	B-5
Plot 12	Upper Neck Force Resultant	B-5
Plot 13	Upper Neck X Moment	B-6
Plot 14	Upper Neck Y Moment	B-6
Plot 15	Upper Neck Z Moment	B-6
Plot 16	Upper Neck Moment Resultant	B-6
Plot 17	Total Moment about the OC	B-7
Plot 18	Neck Tension-Flexion Injury	B-7
Plot 19	Neck Tension-Extension Injury	B-7
Plot 20	Neck Compression-Flexion Injury	B-7
Plot 21	Neck Compression-Extension Injury	B-8
Plot 22	Total Neck Injury	B-8
Plot 23	Passenger Curtain Squib Current	B-8
Plot 24	Passenger Curtain Squib Voltage	B-8
Plot 25	Passenger Seat Squib Current	B-9
Plot 26	Passenger Seat Squib Voltage	B-9

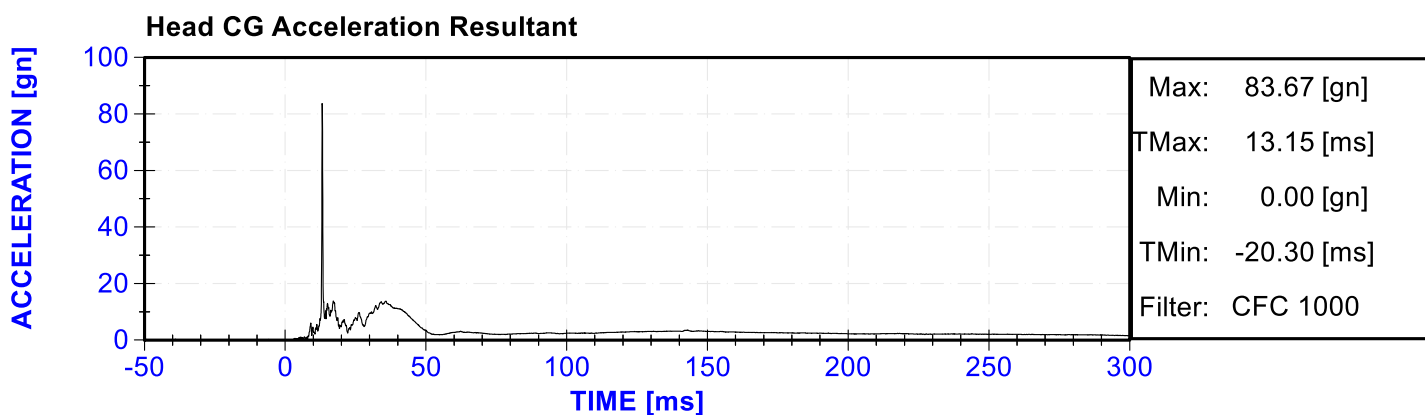
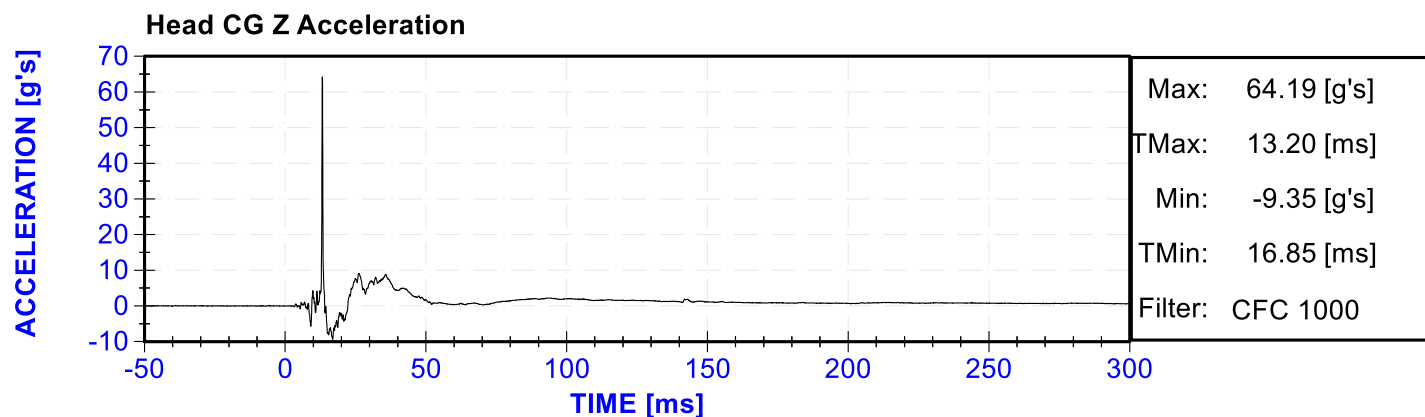
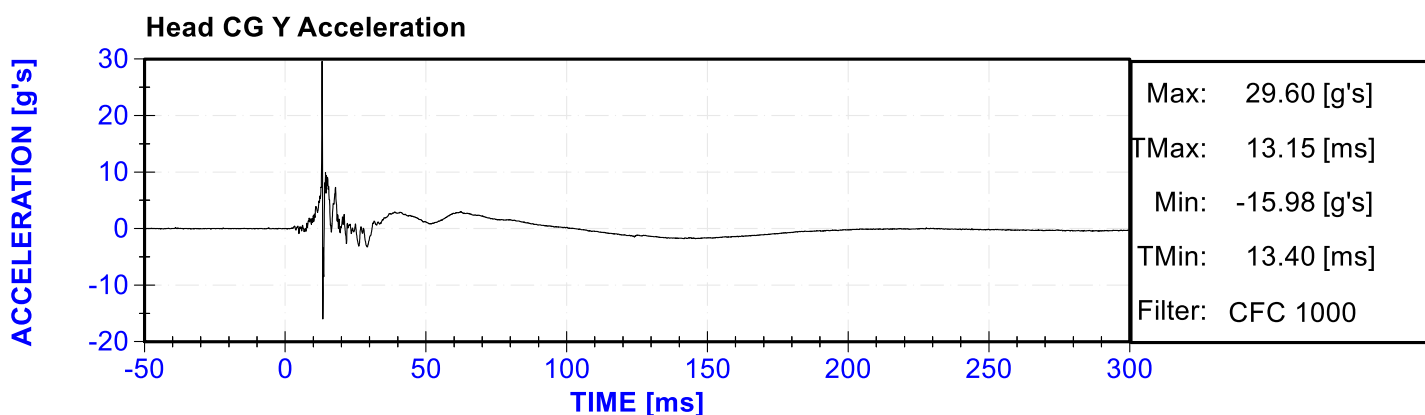
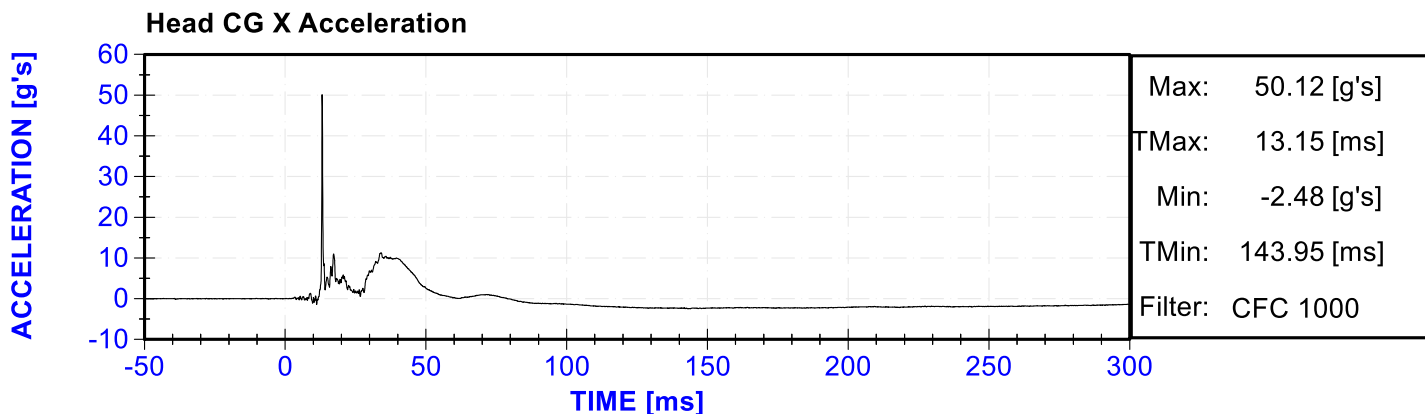


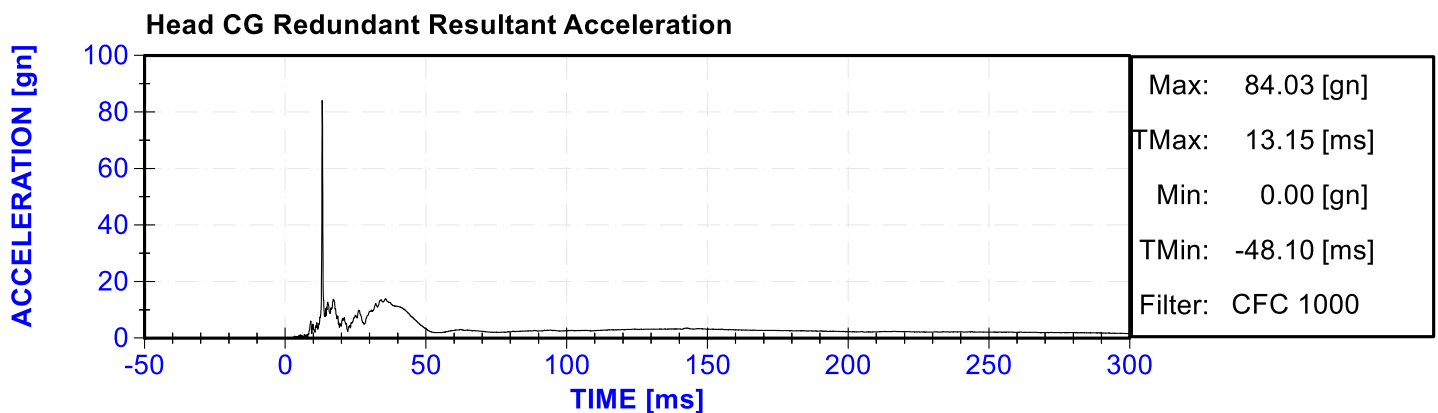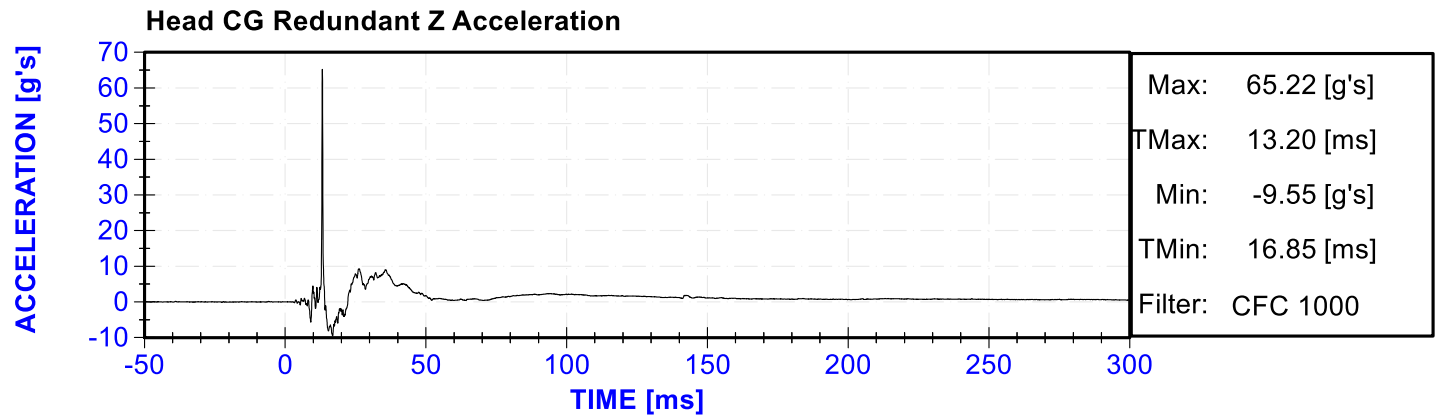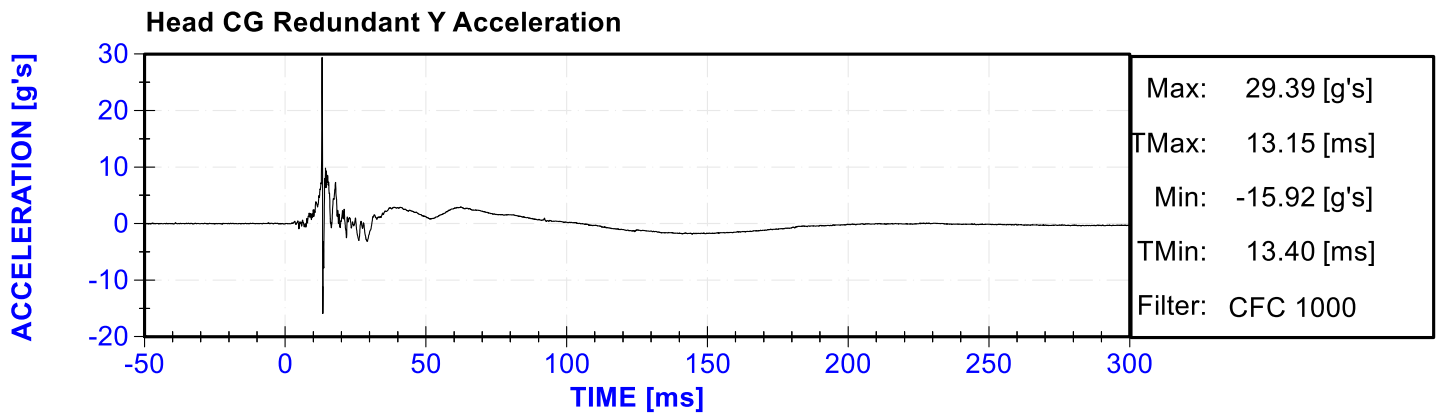
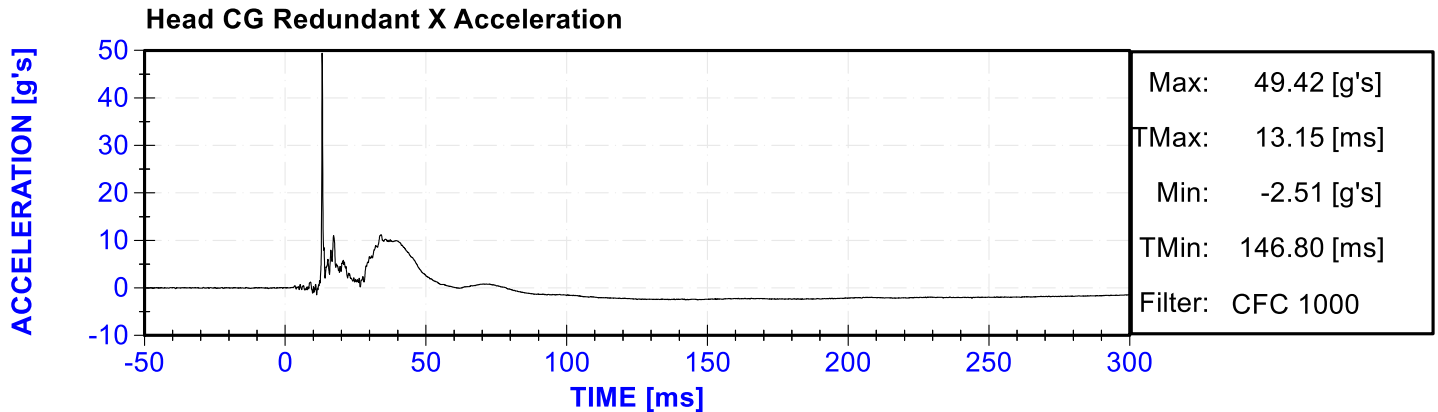


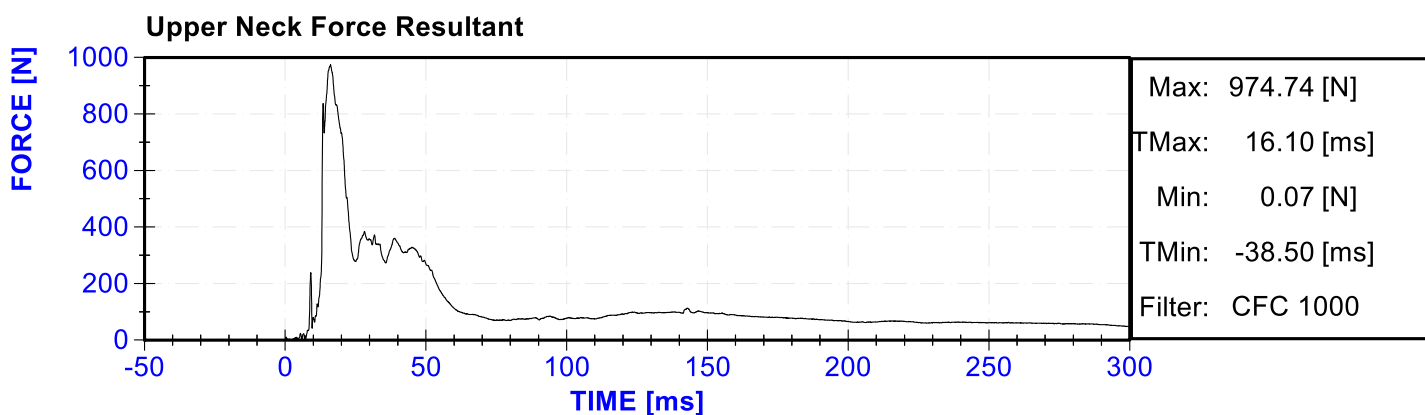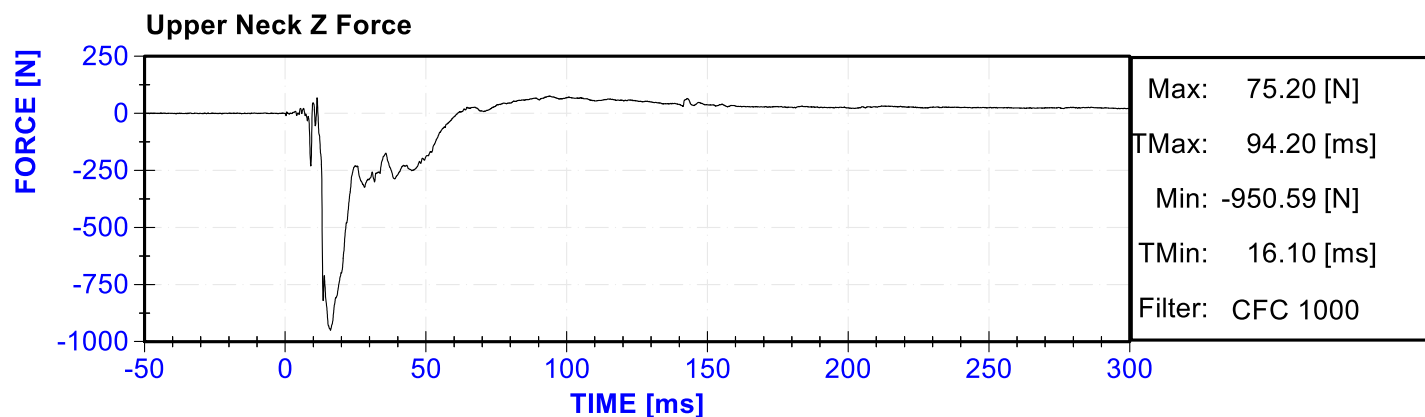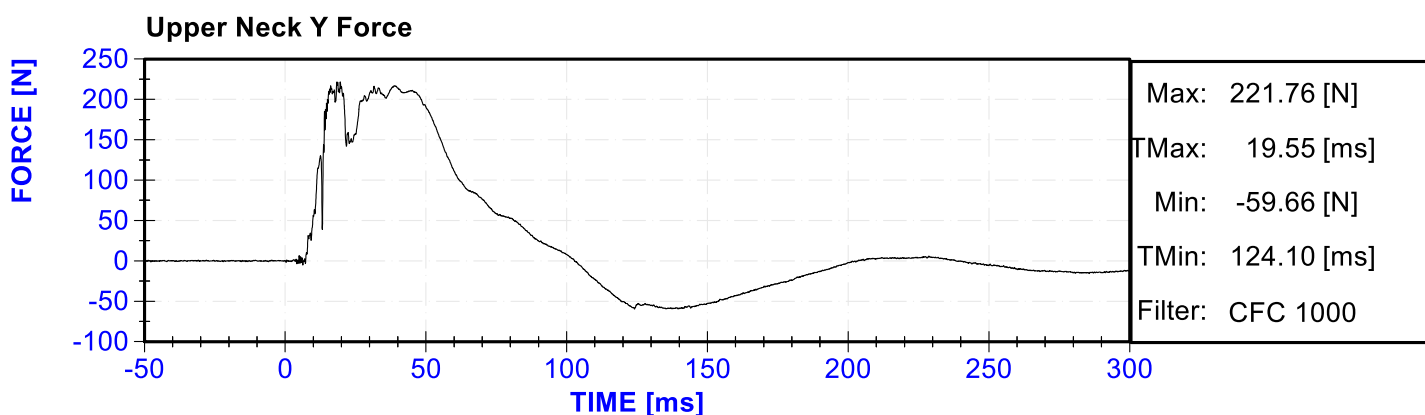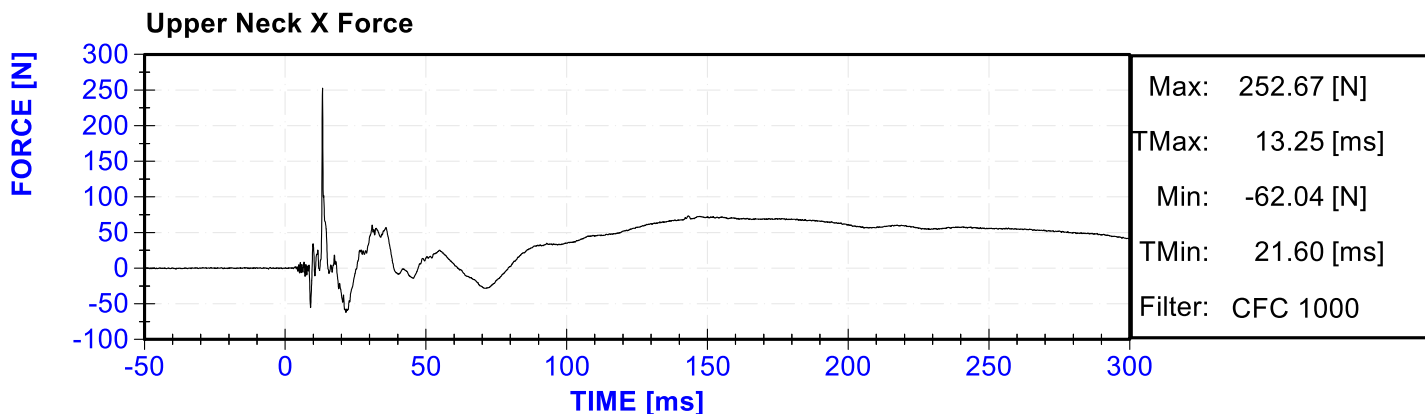

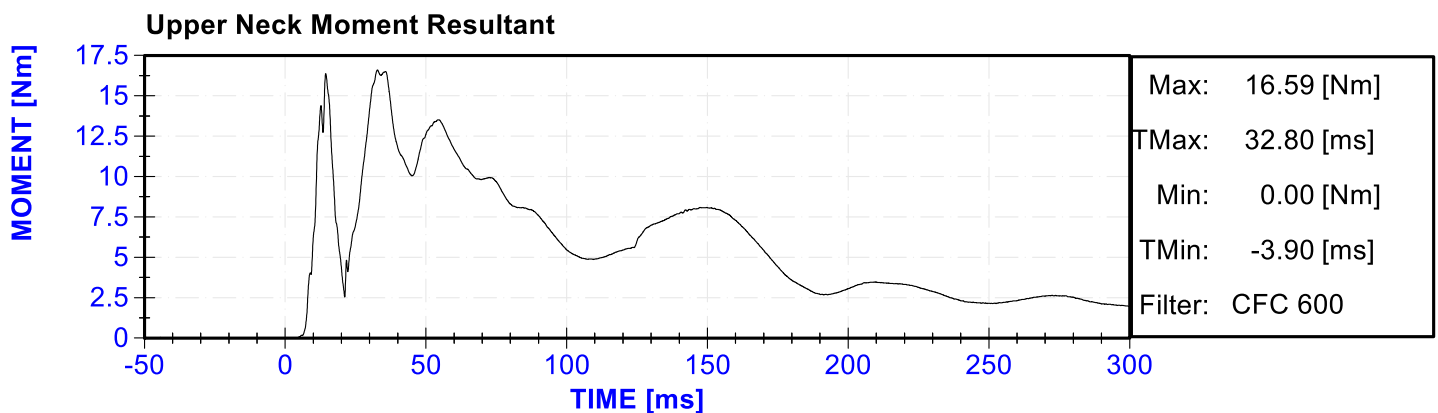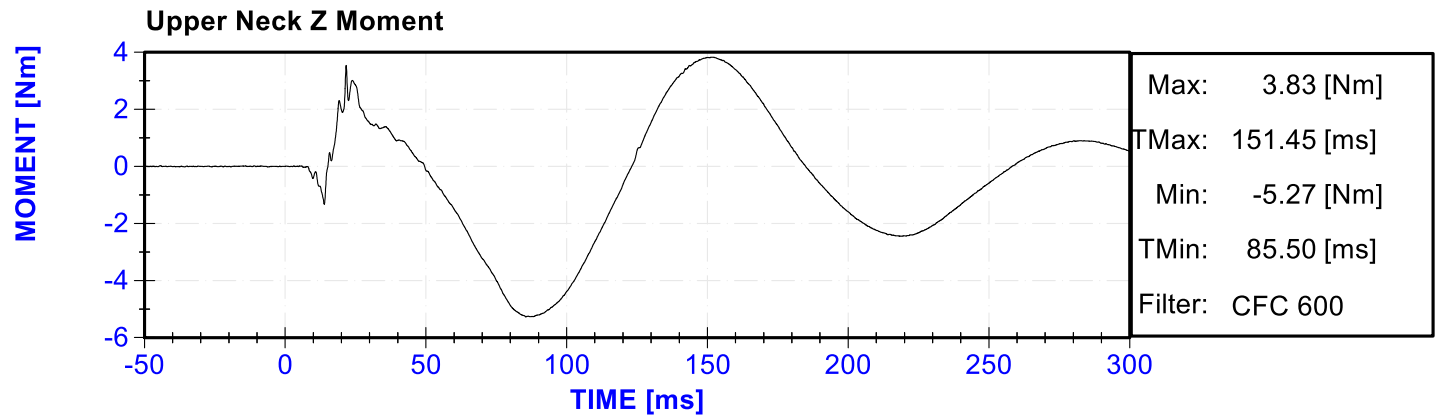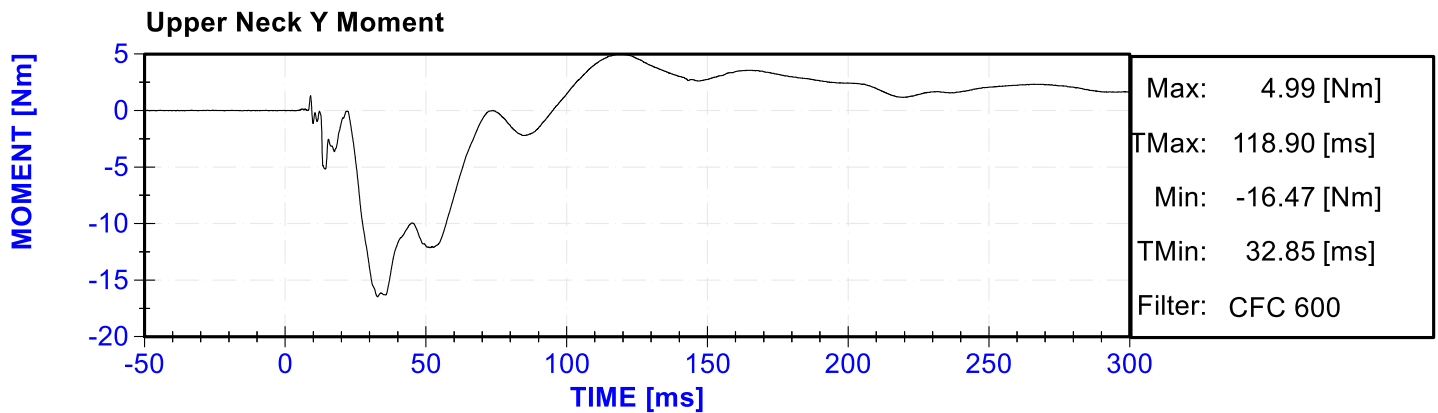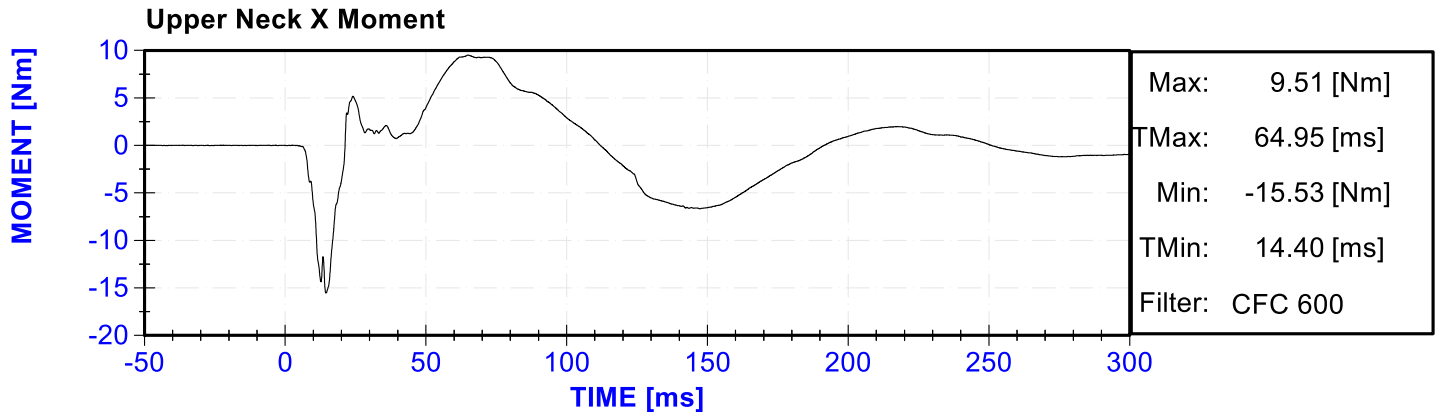

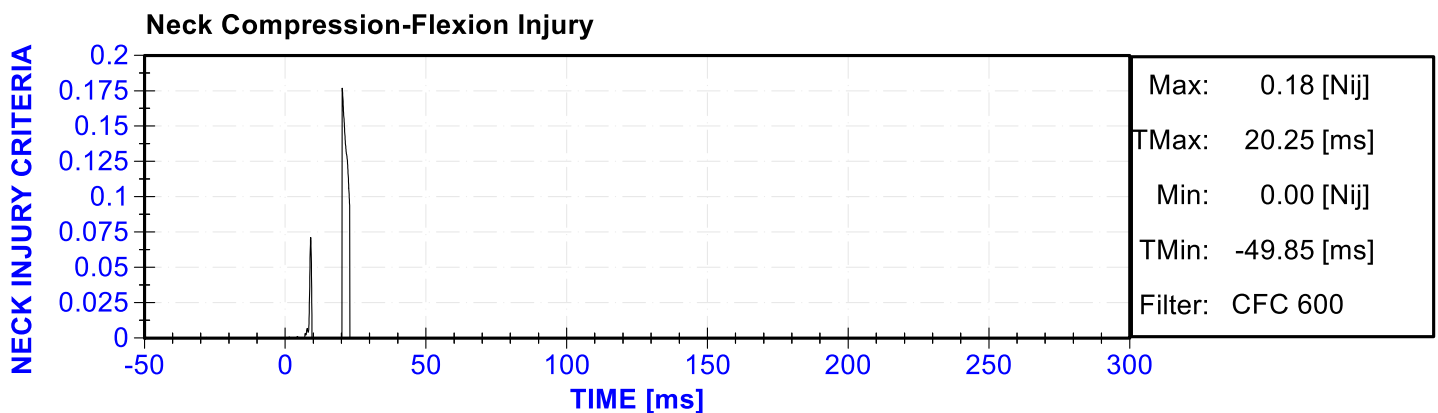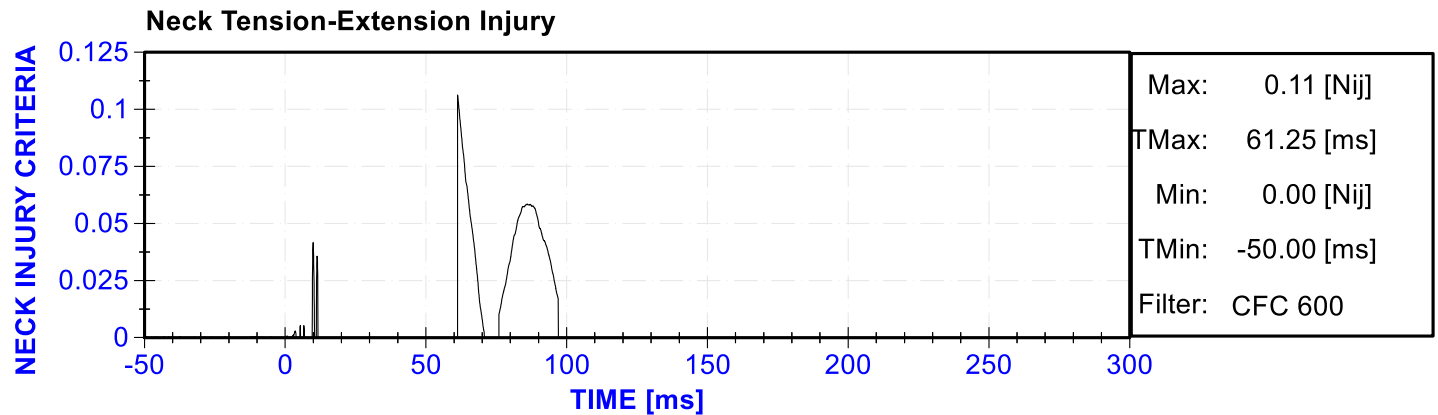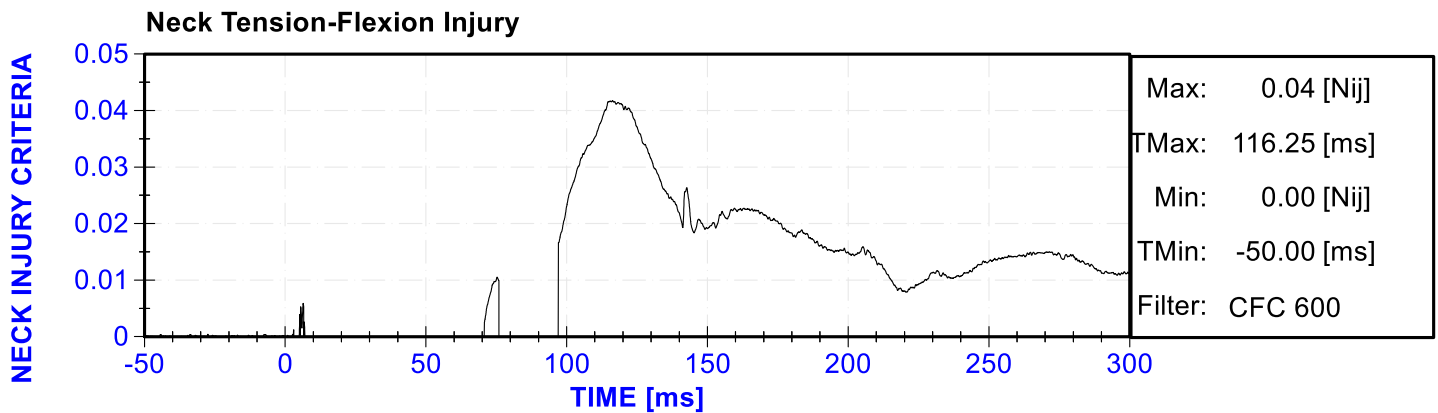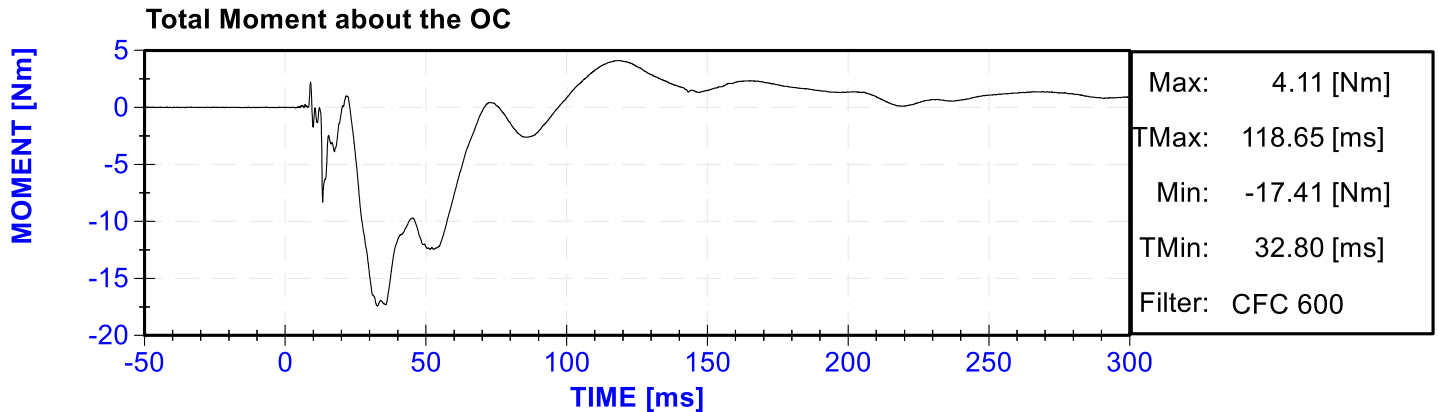

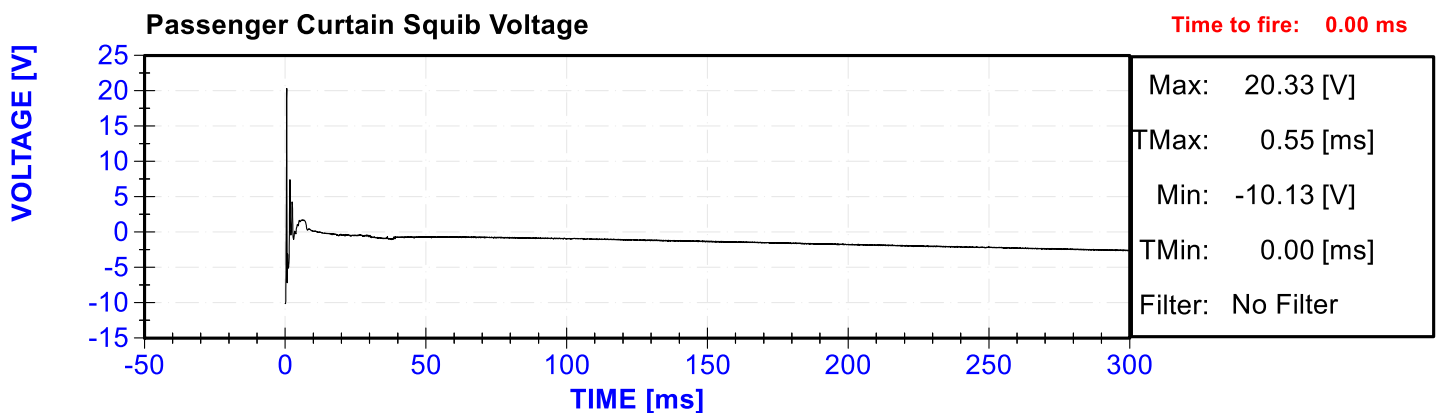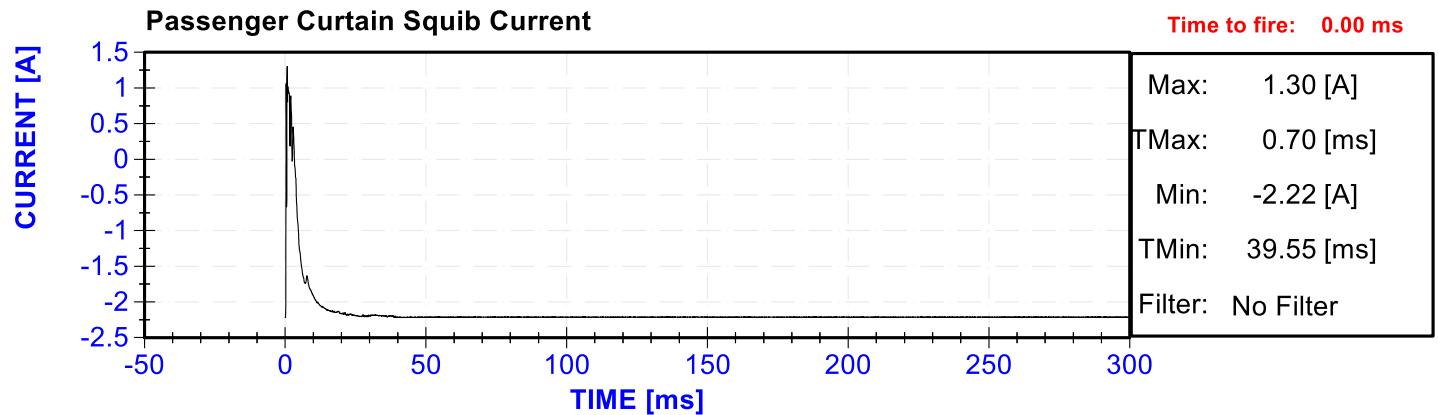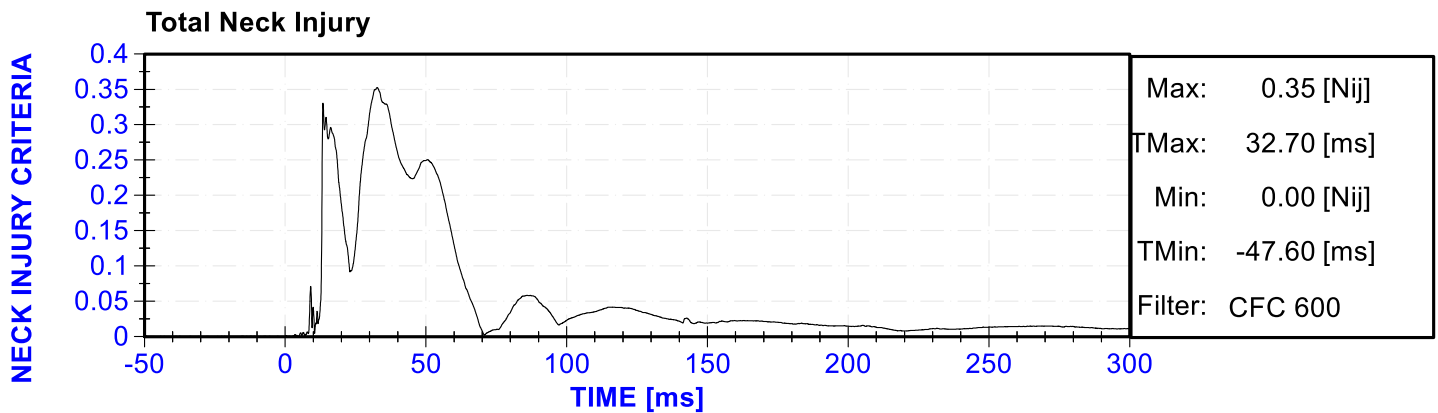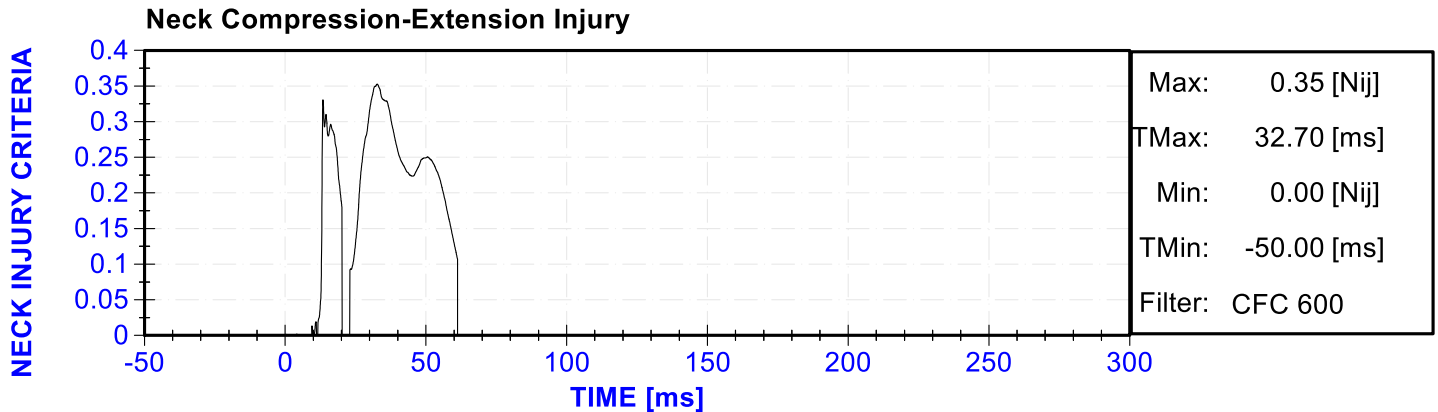

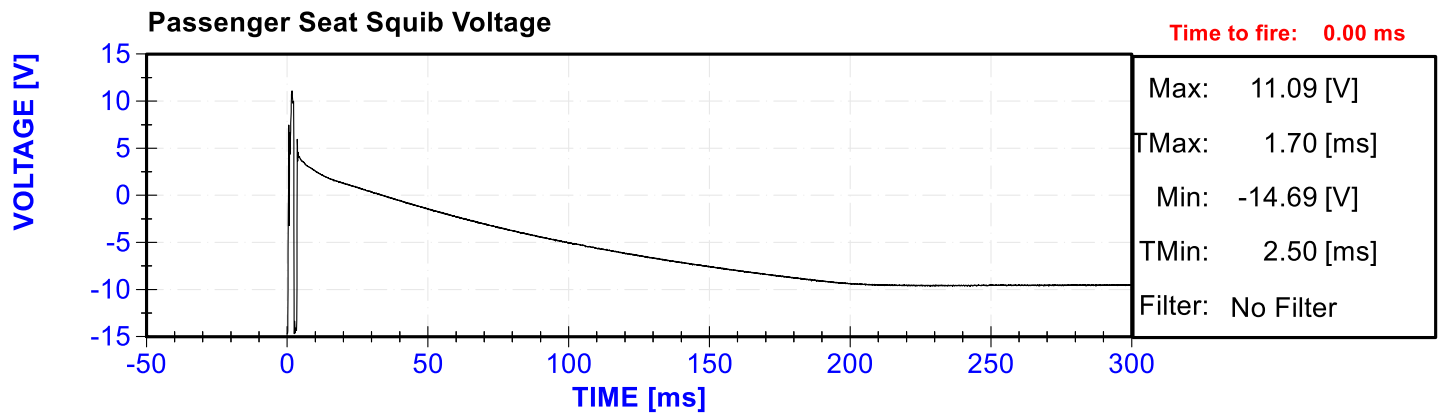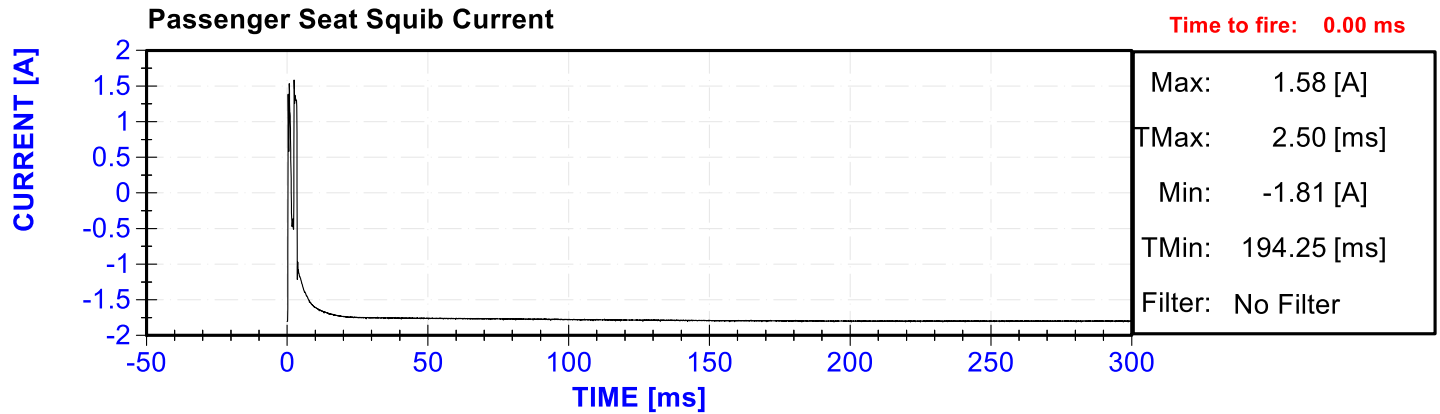

APPENDIX C

TEST EQUIPMENT LIST AND CALIBRATION INFORMATION

TEST EQUIPMENT LIST AND CALIBRATION INFORMATION

	POSITION 2 (Front Right Passenger) SERIAL NO.: DG8012 M20180202TWG2		
	SERIAL NUMBER	MANUFACTURER	CALIBRATION DATE
Head X Acceleration	AC-P51685	ENDEVCO 7264CT	5/4/2018
Head Y Acceleration	AC-P51682	ENDEVCO 7264CT	5/4/2018
Head Z Acceleration	AC-P51699	ENDEVCO 7264CT	5/4/2018
Head Redundant X Acceleration	AC-P51701	ENDEVCO 7264CT	5/4/2018
Head Redundant Y Acceleration	AC-P45019	ENDEVCO 7264CT	5/4/2018
Head Redundant Z Acceleration	AC-P51690	ENDEVCO 7264CT	5/4/2018
Upper Neck X Force	LC-280FxGFE	Denton IF-205	11/7/2017
Upper Neck Y Force	LC-280FyGFE	Denton IF-205	11/7/2017
Upper Neck Z Force	LC-280FzGFE	Denton IF-205	11/7/2017
Upper Neck X Moment	LC-280MxGFE	Denton IF-205	11/7/2017
Upper Neck Y Moment	LC-280MyGFE	Denton IF-205	11/7/2017
Upper Neck Z Moment	LC-280MzGFE	Denton IF-205	11/7/2017
Lower Neck X Force	-	-	-
Lower Neck Y Force	-	-	-
Lower Neck Z Force	-	-	-
Lower Neck X Moment	-	-	-
Lower Neck Y Moment	-	-	-
Lower Neck Z Moment	-	-	-
Curtain Bag Voltage	ABT squib volts	AutoLab System	-
Curtain Bag Current	ABT squib amps	AutoLab System	-
Seat/Torso Bag Voltage	ABT squib volts	AutoLab System	-
Seat/Torso Bag Current	ABT squib amps	AutoLab System	-