

REPORT NUMBER: 301-KAR-22-002
SAFETY COMPLIANCE TESTING FOR FMVSS 301R
FUEL SYSTEM INTEGRITY – REAR IMPACT
79.3 KM/H 70% OVERLAP REAR IMPACT

HONDA OF CANADA MFG., INC
2022 HONDA CIVIC 4-DOOR SEDAN

NHTSA NUMBER: C20225302

PREPARED BY:
APPLUS+ IDIADA KARCO ENGINEERING, LLC.
9270 HOLLY ROAD
ADELANTO, CA 92301




TEST DATE:
SEPTEMBER 20, 2022

REPORT DATE:
OCTOBER 4, 2022
FINAL REPORT

U.S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
ENFORCEMENT
OFFICE OF VEHICLE SAFETY COMPLIANCE
ROOM 6111, NVS-220
400 SEVENTH STREET, SW
WASHINGTON, DC 20590


This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared By:  _____

Mr. Noah A. Partida, Project Engineer
Applus+ IDIADA KARCO Engineering, LLC.

Reviewed By:  _____

Mr. Alex Beltran, Engineering Manager
Applus+ IDIADA KARCO Engineering, LLC.

Approved By:  _____

Mr. Michael L. Dunlap, Director of Operations
Applus+ IDIADA KARCO Engineering, LLC.

Approval Date: _____ October 4, 2022 _____

FINAL REPORT ACCEPTANCE BY OVSC:

Date: _____

TECHNICAL REPORT DOCUMENTATION PAGE

1. Report No. 301-KAR-22-002	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle Final Report of FMVSS 301R Compliance Testing of a 2022 Honda Civic 4-Door Sedan NHTSA No. C20225302		5. Report Date October 4, 2022	
		6. Performing Organization Code KAR	
7. Authors Mr. Noah Partida, Project Engineer, Applus+ IDIADA KARCO Engineering Mr. Alex Beltran, Engineering Manager, Applus+ IDIADA KARCO Engineering		8. Performing Organization Report No. TR-P42218-01-NC	
9. Performing Organization Name and Address Applus+ IDIADA KARCO Engineering, LLC. 9270 Holly Rd. Adelanto, CA 92301		10. Work Unit No.	
		11. Contract or Grant No. DTNH22-16-D-00029	
12. Sponsoring Agency Name and Address U. S. Department of Transportation National Highway Traffic Safety Administration Enforcement Office of Vehicle Safety Compliance Room 6111, NVS-220 400 Seventh Street, SW Washington, D.C. 20590		13. Type of Report and Period Covered Final Test Report, September 20, 2022 - October 4, 2022	
		14. Sponsoring Agency Code NVS-220	
15. Supplementary Notes			
16. Abstract A 79.3 km/h 70% overlap rear impact test was conducted on the subject 2022 Honda Civic 4-Door Sedan in accordance with the Office of Vehicle Safety Compliance Laboratory Test Procedure No. TP-301R-02 for the determination of FMVSS 301 compliance. The test was conducted at the Applus+ IDIADA KARCO Engineering, LLC. facility in Adelanto, California on September 20, 2022. The impact velocity was 78.60 km/h and the outside ambient temperature was 28.3° C. There was no Stoddard solvent leakage immediately after the test nor during any portion of the static rollover. The test vehicle appeared to comply with all requirements of FMVSS 301R.			
17. Key Words FMVSS 301R 70% Overlap Rear Impact MDB 2022 Honda Civic 4-Door Sedan		18. Distribution Statement Copies of this report are available from the following: U.S. Department of Transportation NHTSA Technical Information Services (TIS) Mail Code: NIO-120, Room E-12 -100 1200 New Jersey Avenue, SE Washington, DC 20590 Telephone No. 202-366-4946	
19. Security Classification of this report UNCLASSIFIED	20. Security Classification of UNCLASSIFIED	21. No. of Pages 33	22. Price

TABLE OF CONTENTS

<u>Section</u>		<u>Page No.</u>
1	Summary of Test	1
2	Data Sheets	2
<u>Data Sheet No.</u>		<u>Page No.</u>
1	Test Vehicle Specifications	3
2	Pre-Test Data	5
3	Moving Barrier Data	9
4	Post-Test Data	10
5	Static Rollover Test Data	12
<u>Appendix</u>		<u>Page No.</u>
A	Photographs	A

SECTION 1

SUMMARY OF TEST

SUMMARY

The purpose of this rear impact test is to measure the performance of the subject vehicle, a 2022 Honda Civic 4-Door Sedan, for FMVSS 301 compliance.

This 79.3 km/h 70% Overlap Rear Impact is sponsored by the National Highway Traffic Safety Administration (NHTSA) under contract number DTNH22-16-D-00029. It was conducted in accordance with the Office of Vehicle Safety Compliance Laboratory Test Procedure TP-301R-02 for FMVSS 301R "Fuel System Integrity – Rear Impact", dated January 2007.

The test was performed at Applus+ IDIADA KARCO Engineering, LLC. on September 20, 2022. Pre- and post- test photographs of the vehicle and ATD's can be found in Appendix A of this report.

One (1) real-time cameras and three (3) high-speed cameras were used to document the rear impact event.

Two Part 572E 50th percentile male anthropomorphic test devices (ATD) were placed in the driver and right front passenger seating positions. Neither of the ATD's were instrumented for this test.

There was no Stoddard solvent leakage after the impact or during any portion of the static rollover. The test vehicle appeared to comply with all requirements of FMVSS 301R-02 "Fuel System Integrity – Rear Impact". FMVSS 301 data is summarized in Data Sheets 4 and 5.

SECTION 2
DATA SHEETS

Test Vehicle: 2022 Honda Civic 4-Door Sedan

NHTSA No.: C20225302

Test Program: 79.3 km/h 70% Overlap Rear Impact

Test Date: 09/20/22

CONVERSION FACTORS

Quantity	Typical Application	Std Units	Metric Unit	Multiply By
Mass	Vehicle Weight	lb	kg	0.4536
Linear Velocity	Impact Velocity	miles/hr	km/hr	1.609344
Length or Distance	Measurements	in	mm	25.4
Volume	Fuel Systems	gal	liter	3.785
Volume	Small Fluids	oz	mL	29.574
Pressure	Tire Pressures	lbf/in ²	kPa	6.895
Temperature	General Use	°F	°C	$=(T_f - 32)/1.8$
Force	Dynamic Forces	lbf	N	4.448
Moment	Torque	lbf-ft	N•m	1.355

DATA SHEET NO. 1

TEST VEHICLE SPECIFICATIONS

Test Vehicle: 2022 Honda Civic 4-Door Sedan

NHTSA No.: C20225302

Test Program: 79.3 km/h 70% Overlap Rear Impact

Test Date: 09/20/22

TEST VEHICLE INFORMATION AND OPTIONS

NHTSA Number	C20225302
Model Year	2022
Make	Honda
Model	Civic
Body Style	4-Door Sedan
VIN	2HGFE2F20NH532613
Body Color	Rally Red
Odometer Reading (km / mi)	
Engine Displacement (L)	2.0
Type / No. of Cylinders	I4
Engine Placement	Transverse
Transmission Type	Automatic
Transmission Speeds	Variable
Overdrive	No
Final Drive	FWD
Roof Rack	No
Sunroof / T-Top	No
Running Boards	No
Tilt Steering Wheel	Yes
Power Seats	No
Anti-Lock Brakes (ABS)	Yes
Automatic Door Locks (ADLs)	Yes

Traction Control System	Yes
Power Steering	Yes
Power Window Auto-Reverse	Yes
Driver Frontal Airbag	Yes
Driver Curtain Airbag	Yes
Driver Head/Torso Airbag	No
Driver Torso Airbag	No
Driver Torso/Pelvis Airbag	Yes
Driver Pelvis Airbag	No
Driver Knee Airbag	Yes
Front Pass. Frontal Airbag	Yes
Front Pass. Curtain Airbag	Yes
Front Pass. Head/Torso Airbag	No
Front Pass. Torso Airbag	No
Front Pass. Torso/Pelvis Airbag	Yes
Front Pass. Pelvis Airbag	No
Front Pass. Knee Airbag	Yes
Driver Seat Belt Pretensioner	Yes
Driver Load Limiter	Yes
Front Pass. Seat Belt Pretensioner	Yes
Front Pass. Load Limiter	Yes
Other	No

Does Owner's Manual provide instructions to turn off automatic door locks?

Yes

DATA FROM CERTIFICATION LABEL

Manufactured By	Honda of Canada MFG.
Date of Manufacture	September-21

GVWR (kg)	1740
GAWR Front (kg)	919
GAWR Rear (kg)	825

VEHICLE SEATING AND CAPACITY WEIGHT INFORMATION

Measured Parameter	Front	Rear	Third	Total	
Type of Seats	Bucket	Split Bench			
Designated Seating Capacity	2	3		5	
Capacity Weight (VCW) (kg)				385.0	A
DSC x 68.04 (kg)				340.2	B
Cargo Weight (RCLW) (kg)				44.8	A-B

DATA SHEET NO. 1 ... (CONTINUED)


TEST VEHICLE SPECIFICATIONS

Test Vehicle: 2022 Honda Civic 4-Door Sedan

NHTSA No.: C20225302

Test Program: 79.3 km/h 70% Overlap Rear Impact

Test Date: 09/20/22

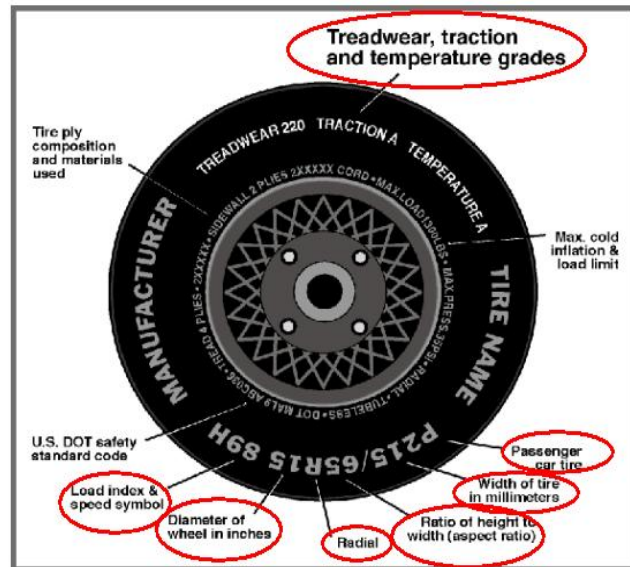

VEHICLE TIRE INFORMATION

Measured Parameter	Front	Rear
Max Tire Pressure (kPa)	350	350
Cold Tire Pressure (kPa)	220	220
Recommended Tire Size	215/55R16 93H	215/55R16 93H
Tire Size on Vehicle	215/55R16 93H	215/55R16 93H
Tire Manufacturer	Hankook	Hankook
Tire Model	Kinergy GT	Kinergy GT
Treadwear Rating	500	500
Traction Rating	A	A
Temperature Grades	A	A
Tire Plies Sidewall	2 Polyester	2 Polyester
Tire Plies Body	2 Steel, 2 Polyester, 1 Nylon	2 Steel, 2 Polyester, 1 Nylon
Load Index/Speed Symbol	93H	93H
Tire Material	Steel, Polyester, Nylon	Steel, Polyester, Nylon
DOT Safety Code Left	T7R1 1BH 0421	T7R1 1BH 0421
DOT Safety Code Right	T7R1 1BH 0421	T7R1 1BH 0421
Type of Spare Tire	T125/80D16	
Location of Tire Placard on Vehicle	Driver B-Pillar	

DATA SHEET NO. 2**PRE-TEST DATA**Test Vehicle: 2022 Honda Civic 4-Door SedanNHTSA No.: C20225302Test Program: 79.3 km/h 70% Overlap Rear ImpactTest Date: 09/20/22**TEST VEHICLE AXLE WEIGHTS**

	Units	As Delivered (UVW)			As Tested (ATW)		
		Front	Rear	Total	Front	Rear	Total
Left	kg	395.0	251.0	646.0	450.5	290.0	740.5
Right	kg	393.0	244.5	637.5	434.0	293.0	727.0
Ratio	%	61.4%	38.6%	100.0%	60.3%	39.7%	100.0%
Total	kg	788.0	495.5	1283.5	884.5	583.0	1467.5

TARGET TEST WEIGHT CALCULATION

Measured Parameter	Units	Value
Total Delivered Weight (UVW)	kg	1283.5
Actual Weight of 2 P572 ATDs Used	kg	148.0
Rated Cargo/Luggage Wt (RCLW)	kg	44.8
Calculated Vehicle Target Wt (TVTW)	kg	1476.3

A
B
C
A+B+C

TEST VEHICLE ATTITUDES

Condition	Units	LF	RF	LR	RR	CG Aft of Front Axle
As Delivered	mm	670	672	677	680	1059
As Tested	mm	653	655	669	668	1089

GENERAL TEST VEHICLE DATA

Measured Parameter	Units	Value
Total Vehicle Wheel Base	mm	2742
Total Vehicle Length	mm	4672
Total Vehicle Width	mm	1795
Amount of Stoddard Solvent in Fuel Tank	L	43.57

DATA SHEET NO. 2... (CONTINUED)**PRE-TEST DATA**Test Vehicle: 2022 Honda Civic 4-Door SedanNHTSA No.: C20225302Test Program: 79.3 km/h 70% Overlap Rear ImpactTest Date: 09/20/22**BALLAST DATA**


Description	Value
Type of Ballast	Sandbag
Method of Securing Ballast	Tie Downs
Total Weight of Ballast	19.0 kg
Weight of Vehicle Components Removed	0.0 kg

VEHICLE COMPONENTS REMOVED TO MEET TEST WEIGHT:None**FUEL TANK CAPACITY**

Description	Liters
Fuel System Capacity Listed in Owners Manual	46.86
Usable Capacity of "Standard Tank"	46.86
91 - 94% of Usable Capacity	42.65-44.06
Actual Amount of Stoddard Solvent Used	43.57

FUEL PUMP

The vehicle is equipped with an electric fuel pump. Fuel pump will run when the push start button is pressed twice without pressing the brake pedal.

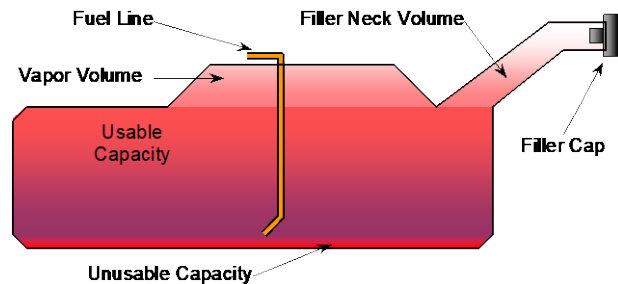**TEST FLUID****VEHICLE FUEL TANK ASSEMBLY**

Description	Value
Test Fluid Type	Stoddard Solvent
Test Fluid Specific Gravity	0.758
Test Fluid Kinematic Viscosity	0.96
Test Fluid Color	Purple

DATA SHEET NO. 2... (CONTINUED)

PRE-TEST DATA

Test Vehicle: 2022 Honda Civic 4-Door Sedan

NHTSA No.: C20225302

Test Program: 79.3 km/h 70% Overlap Rear Impact


Test Date: 09/20/22

NOMINAL DESIGN RIDING POSITION

Seat back angle is measured using a digital inclinometer placed on the headrest post.


SEAT BACK ANGLE

Seating Position	Degrees
Driver Seat Back Angle	2.7
Passenger Seat Back Angle	2.9

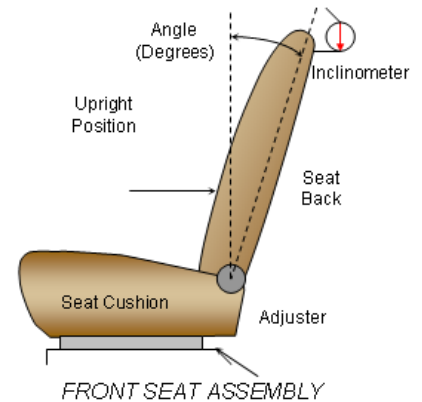

SEAT FORE / AFT POSITIONING

The total seat travel is measured from the forward most possible position to the rear most possible position. The driver's and passenger's seats are set to the middle of the fore-aft travel.

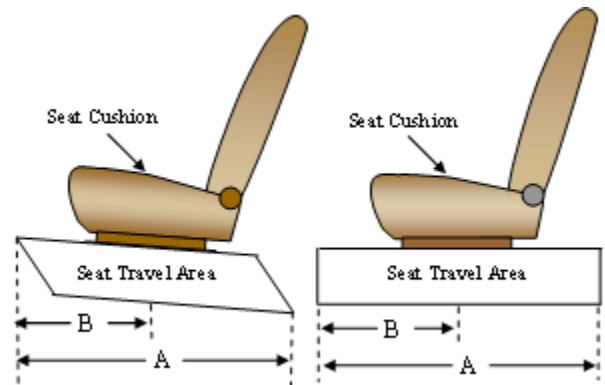

SEAT FORE/AFT POSITIONS

Seating Position	Total Fore-Aft Travel	Placed in Position
Driver Seat	25 Detents	10 Detents
Passenger Seat	22 Detents	11 Detents

DATA SHEET NO. 2... (CONTINUED)

PRE-TEST DATA

Test Vehicle: 2022 Honda Civic 4-Door Sedan


NHTSA No.: C20225302

Test Program: 79.3 km/h 70% Overlap Rear Impact

Test Date: 09/20/22

STEERING COLUMN ADJUSTMENT

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes when moved through its full range of motion. A digital inclinometer is used to measure a plate which is placed across the rim of the steering wheel for angular measurements. A tape measure is used to measure telescoping steering wheel travel.

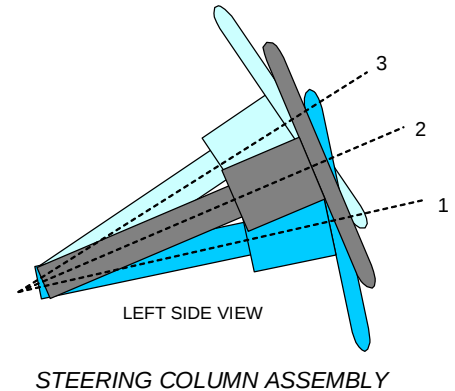

STEERING COLUMN POSITIONING

	Degrees	Fore-Aft Position (mm)
Lowermost Position, No. 1	27.5	104
Geometric Center Position, No. 2	33.3	122
Uppermost Position, No. 3	39.0	140
Telescoping Steering Wheel Travel		
Test Position	33.3	122

DATA SHEET NO. 3
MOVING BARRIER DATA

Test Vehicle: 2022 Honda Civic 4-Door Sedan

NHTSA No.: C20225302

Test Program: 79.3 km/h 70% Overlap Rear Impact

Test Date: 09/20/22

MOVING BARRIER TEST WEIGHT

	Units	As Tested Weights (ATW)		
		Front Axle	Rear Axle	Total
Left	kg	386.5	316.5	703.0
Right	kg	385.5	271.5	657.0
Ratio	%	56.8%	43.2%	100.0%
Total	kg	772.0	588.0	1360.0

MOVING BARRIER TIRE INFORMATION

Measured Parameter	Front	Rear
Recommended Tire Size	205/75R15	205/75R15
Tire Size on Vehicle	205/75R15	205/75R15
Tire Manufacturer	Pacemark	Pacemark
Tire Model	All Weather	All Weather
Treadwear	420	420
Traction	A	A
Temperature Grades	B	B
Tire Pressure - Front	220	220
Tire Pressure - Rear	220	220

MOVING BARRIER DIMENSIONS

Measurement Description	Length (mm)
Overall Width	1676
Overall Height	559
Honeycomb Depth	381
Overall Depth	483
Bottom Honeycomb to Bottom Bumper	51
Bumper Height	203
Ground to Top of MDB	788
Ground to Bottom of MDB	229
Ground to Bottom of Bumper	280
Ground to Top of Bumper	483

DATA SHEET NO. 4**POST-TEST DATA**Test Vehicle: 2022 Honda Civic 4-Door SedanNHTSA No.: C20225302Test Program: 79.3 km/h 70% Overlap Rear ImpactTest Date: 09/20/22Temperature at Time of Impact: 28.3°CTest Time: 3:00 PMVIN: 2HGFE2F20NH532613**IMPACT VELOCITY DATA**

Measured Parameter	Units	Value
Trap No. 1 Velocity (Primary)	km/h	78.60
Trap No. 2 Velocity (Redundant)	km/h	

IMPACT POINT LOCATION DATA

Measured Parameter	Units	Tolerance	Value
Vehicle Width	mm		1795
Vertical Impact Reference Line (Right of Vehicle Center Line)	mm		359
Actual Impact Point (Right of Vehicle Center Line)	mm		323
Horizontal Offset (+ right / - left)	mm	± 50 of Intended Impact Point	-36
Vertical Offset (- down / + up)	mm	± 40 of Intended Impact Point	-4

TARGET VEHICLE STRUCTURAL MEASUREMENTS

No.	Description	Pre-Test	Post-Test	Difference
1	Total Length at Centerline	4672	4272	400
2	Total Length	4672	4832	-160
3	Total Width	1795	2310	-515
4	Left Side Wheelbase	2740	2690	50
5	Right Side Wheelbase	2742	2760	-18

MAXIMUM STATIC CRUSH OF HONEYCOMB FACE

Vertical Location			From Centerline		Max. Crush (mm)
Row	Description	Height (mm)	Distance (mm)	Direction	
A	Center of Bumper	785	0	C/L	287
B	Top of Bumper	846	0	C/L	192
C	Mid Level	919	0	C/L	95
D	Top of Stack	664	100	Left	63

DATA SHEET NO. 4... (CONTINUED)**POST-TEST DATA**Test Vehicle: 2022 Honda Civic 4-Door SedanNHTSA No.: C20225302Test Program: 79.3 km/h 70% Overlap Rear ImpactTest Date: 09/20/22**DOOR OPENING AND SEAT TRACK INFORMATION**

Description	Driver	Passenger
Front Door Opening	Remained closed and latched	Remained closed and latched
Rear Door Opening	Remained closed and latched	Remained closed and latched
Hatch and other doors	Rear Trunk Jammed Shut	

FMVSS 301 FUEL SYSTEM INTEGRITY POST-IMPACT DATA**Stoddard Solvent Spillage Measurements**

- A. From impact until vehicle motion ceases: 0 g
(Maximum allowable = 28 g)
- B. For the 5 minute period after motion ceases: 0 g
(Maximum allowable = 142 g)
- C. For the following 25 minutes: 0 g
(Maximum allowable = 28 g/minute)
- D. Spillage: None


DATA SHEET NO. 5
STATIC ROLLOVER TEST DATA

Test Vehicle: 2022 Honda Civic 4-Door Sedan

NHTSA No.: C20225302

Test Program: 79.3 km/h 70% Overlap Rear Impact

Test Date: 09/20/22

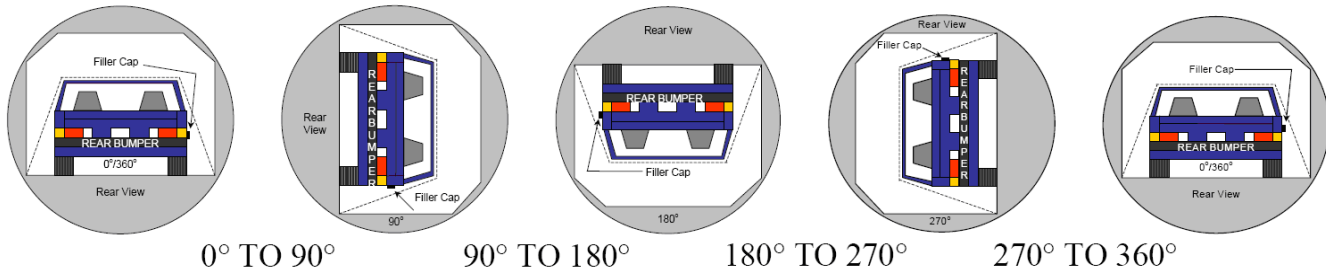

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.
2. The position hold time at each position is 300 seconds (minimum).

Details of Stoddard solvent spillage: None

SOLVENT COLLECTION TIME TABLE IN SECONDS

Test Phase	Rotation Time	Hold Time	Total Time
0° To 90°	85	300	385
90° To 180°	85	310	395
180° To 270°	85	305	390
270° To 360°	85	315	400

FMVSS 301 SPILLAGE TABLE

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° To 90°	0 g	0 g	0 g	
90° To 180°	0 g	0 g	0 g	
180° To 270°	0 g	0 g	0 g	
270° To 360°	0 g	0 g	0 g	

SOLVENT SPILLAGE LOCATION TABLE

Test Phase	Spillage Location
0° To 90°	No Spillage
90° To 180°	No Spillage
180° To 270°	No Spillage
270° To 360°	No Spillage

APPENDIX A
PHOTOGRAPHS

TABLE OF PHOTOGRAPHS

Figure		Page
1	Pre-Test Front View of Test Vehicle	A-1
2	Post-Test Front View of Test Vehicle	A-1
3	Pre-Test Left Front $\frac{3}{4}$ View Test Vehicle	A-2
4	Post-Test Left Front $\frac{3}{4}$ View Test Vehicle	A-2
5	Pre-Test Left View of Test Vehicle	A-3
6	Post-Test Left View of Test Vehicle	A-3
7	Pre-Test Left Rear $\frac{3}{4}$ View of Test Vehicle	A-4
8	Post-Test Left Rear $\frac{3}{4}$ View of Test Vehicle	A-4
9	Pre-Test Rear View of Test Vehicle	A-5
10	Post-Test Rear View of Test Vehicle	A-5
11	Pre-Test Right Rear $\frac{3}{4}$ View of Test Vehicle	A-6
12	Post-Test Right Rear $\frac{3}{4}$ View of Test Vehicle	A-6
13	Pre-Test Right View of Test Vehicle	A-7
14	Post-Test Right View of Test Vehicle	A-7
15	Pre-Test Right Front $\frac{3}{4}$ View Test Vehicle	A-8
16	Post-Test Right Front $\frac{3}{4}$ View Test Vehicle	A-8
17	Pre-Test View of Fuel Filler Cap	A-9
18	Post-Test View of Fuel Filler Cap	A-9
19	Pre-Test Rear Underbody View of Test Vehicle	A-10
20	Post-Test Rear Underbody View of Test Vehicle	A-10
21	Pre-Test Underbody View of Fuel Tank	A-11
22	Post-Test Underbody View of Fuel Tank	A-11
23	Test Vehicle at 0° on FMVSS 301 Static Rollover Device	A-12
24	Test Vehicle at 90° on FMVSS 301 Static Rollover Device	A-12
25	Test Vehicle at 180° on FMVSS 301 Static Rollover Device	A-13
26	Test Vehicle at 270° on FMVSS 301 Static Rollover Device	A-13
27	Test Vehicle at 360° on FMVSS 301 Static Rollover Device	A-14
28	Test Vehicle Manufacturer's Label	A-14
29	Test Vehicle Tire Information Placard	A-15
30	Impact Event	A-15



FIGURE 1. Pre-Test Front View of Test Vehicle



FIGURE 2. Post-Test Front View of Test Vehicle



FIGURE 3. Pre-Test Left Front $\frac{3}{4}$ View of Test Vehicle



FIGURE 4. Post-Test Left Front $\frac{3}{4}$ View of Test Vehicle



FIGURE 5. Pre-Test Left View of Test Vehicle



FIGURE 6. Post-Test Left View of Test Vehicle



FIGURE 7. Pre-Test Left Rear $\frac{3}{4}$ View of Test Vehicle



FIGURE 8. Post-Test Left Rear $\frac{3}{4}$ View of Test Vehicle



FIGURE 9. Pre-Test Rear View of Test Vehicle



FIGURE 10. Post-Test Rear View of Test Vehicle



FIGURE 11. Pre-Test Right Rear $\frac{3}{4}$ View of Test Vehicle



FIGURE 12. Post-Test Right Rear $\frac{3}{4}$ View of Test Vehicle



FIGURE 13. Pre-Test Right View of Test Vehicle



FIGURE 14. Post-Test Right View of Test Vehicle



FIGURE 15. Pre-Test Right Front $\frac{3}{4}$ View of Test Vehicle



FIGURE 16. Post-Test Right Front $\frac{3}{4}$ View of Test Vehicle



FIGURE 17. Pre-Test View of Fuel Filler Cap



FIGURE 18. Post-Test View of Fuel Filler Cap

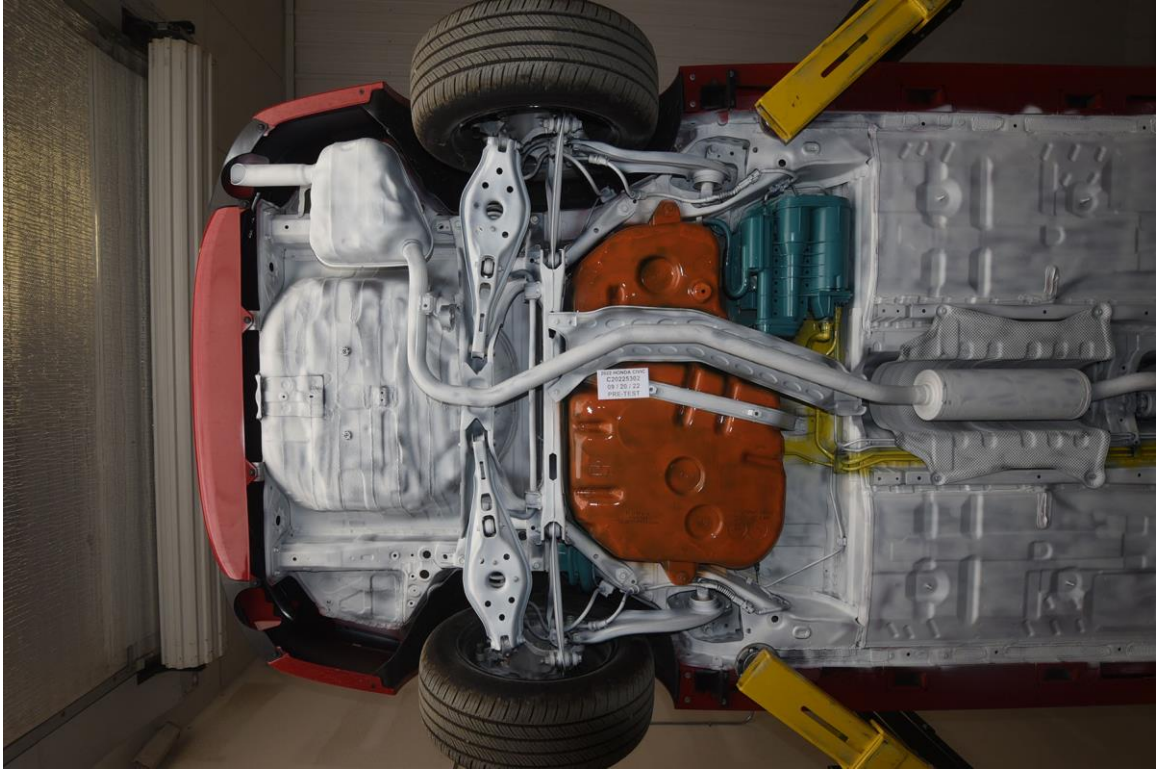


FIGURE 19. Pre-Test Rear Underbody View of Test Vehicle

Correct Test Date: 04/29/22

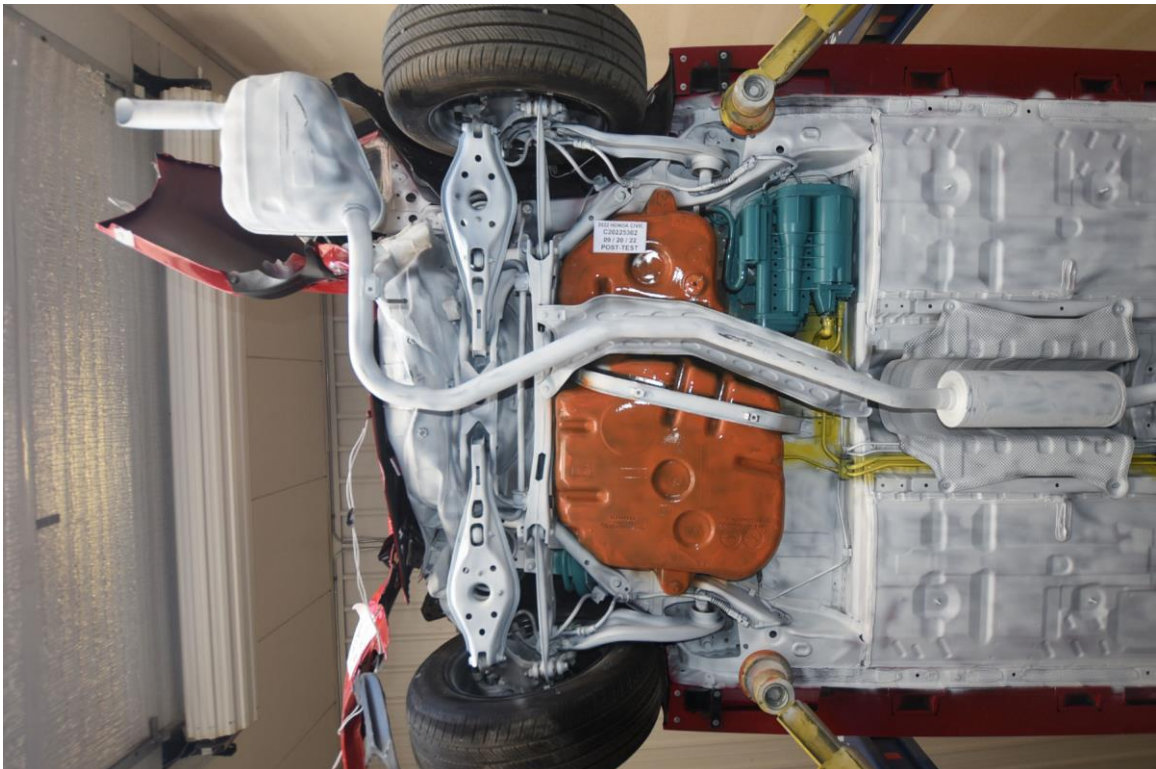


FIGURE 20. Post-Test Rear Underbody View of Test Vehicle

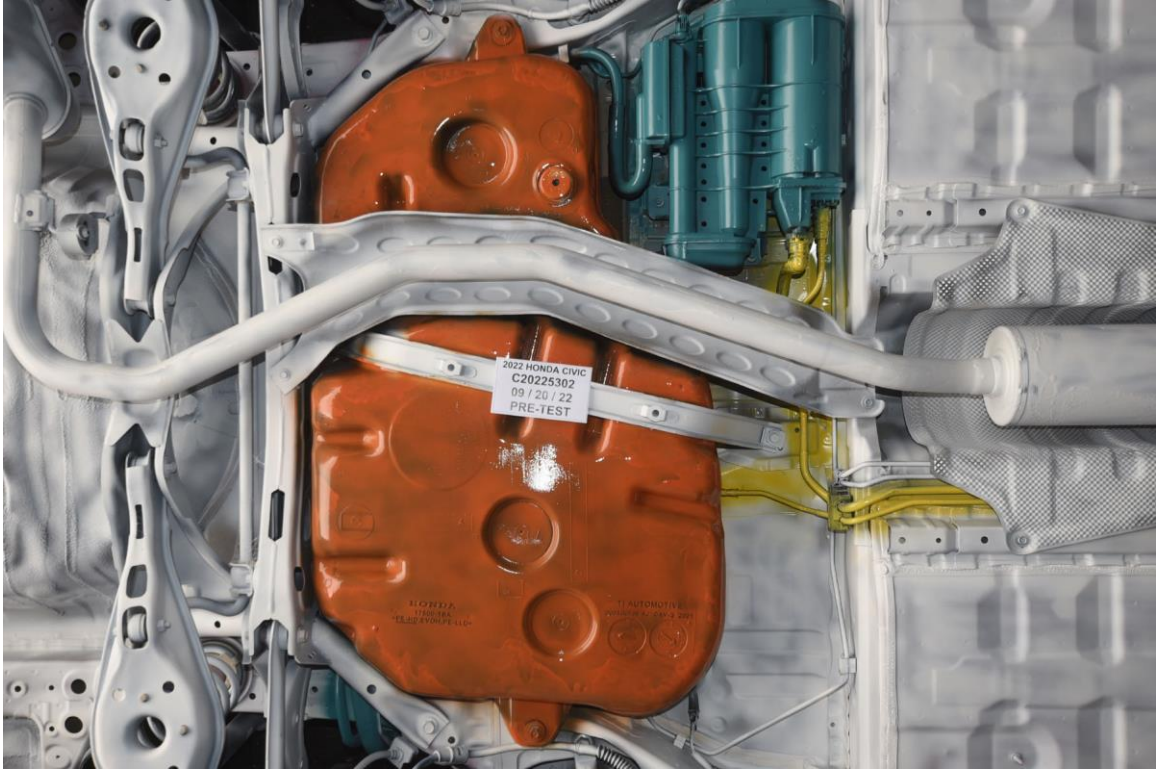


FIGURE 21. Pre-Test Underbody View of Fuel Tank
Correct Test Date: 04/29/22

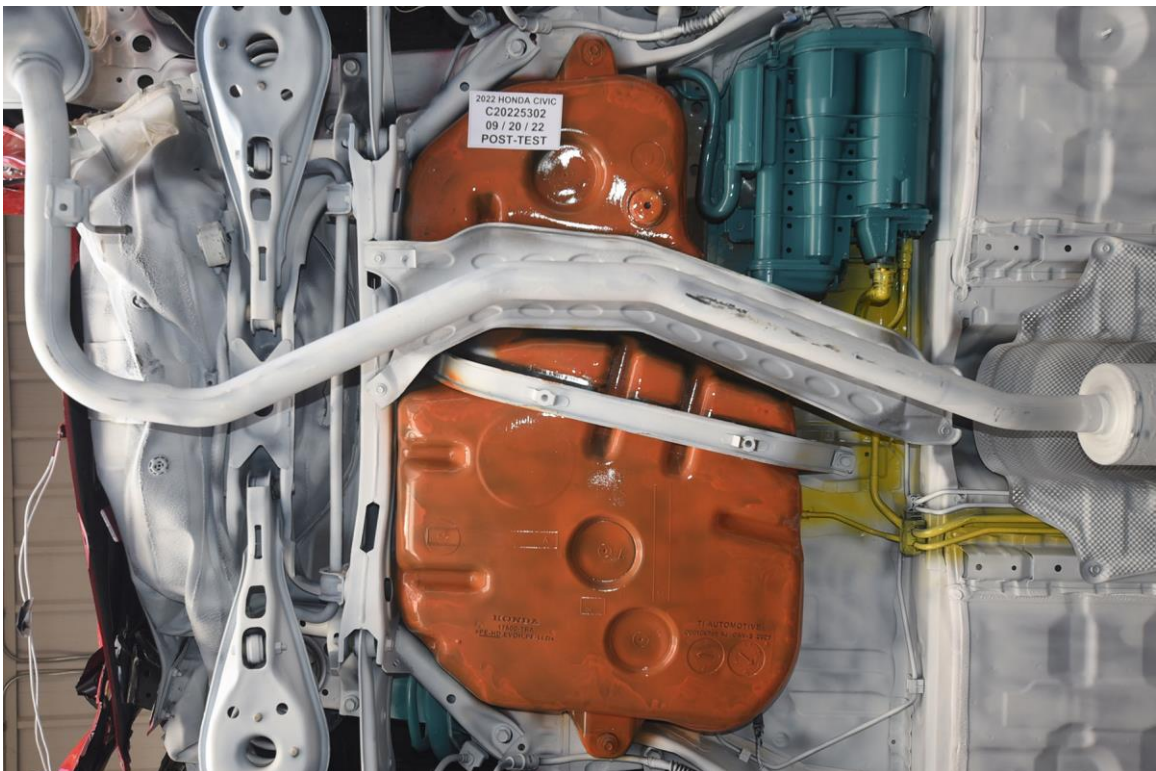


FIGURE 22. Post-Test Underbody View of Fuel Tank



FIGURE 23. Test Vehicle at 0° on FMVSS 301 Static Rollover Device

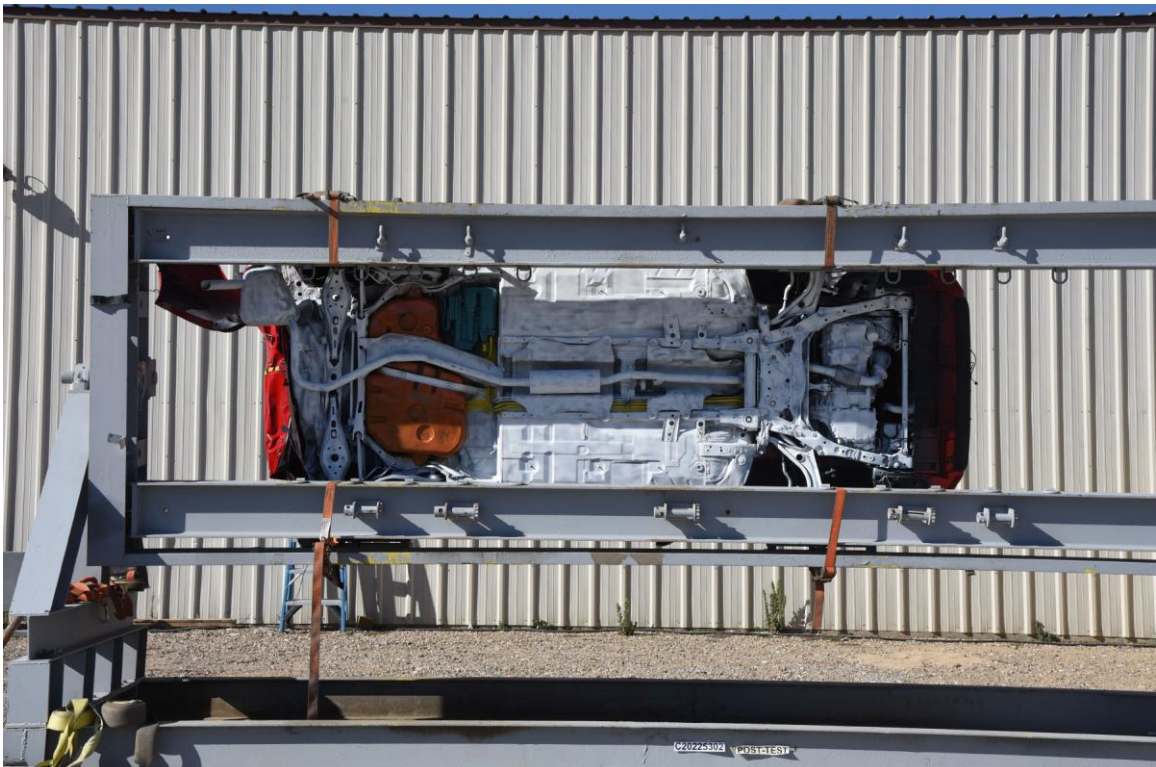


FIGURE 24. Test Vehicle at 90° on FMVSS 301 Static Rollover Device



FIGURE 25. Test Vehicle at 180° on FMVSS 301 Static Rollover Device



FIGURE 26. Test Vehicle at 270° on FMVSS 301 Static Rollover Device



FIGURE 27. Test Vehicle at 360° on FMVSS 301 Static Rollover Device



FIGURE 28. Test Vehicle Manufacturer's Label



FIGURE 29. Test Vehicle Tire Information Placard



FIGURE 30. Impact Event