

REPORT NUMBER: SideNCAPPole-MGA-25-024

**NEW CAR ASSESSMENT PROGRAM (NCAP)
Side Impact Pole Test**

**HONDA DE MEXICO S.A. DE C.V.
2025 Acura ADX 5-Door SUV
NHTSA No.: O20255301**

**MGA RESEARCH CORPORATION
5000 Warren Road
Burlington, WI 53105**



Test Date: July 16, 2025

Final Report Date: December 23, 2025


FINAL REPORT

**U.S. DEPARTMENT OF TRANSPORTATION
National Highway Traffic Safety Administration
Office of Crashworthiness Standards
Mail Code: NRM-100
1200 New Jersey Ave, SE
Washington, DC 20590**

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof.

If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement.

Prepared by: 
Ben Fischer, Program Manager

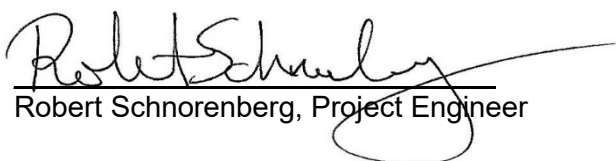Approved by: 
Robert Schnorenberg, Project Engineer

Approval Date: December 23, 2025

FINAL REPORT ACCEPTANCE BY OCWS:

Division Chief, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

COR, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

TECHNICAL REPORT DOCUMENTATION PAGE

1. Report No. SideNCAPPole-MGA-25-024	2. Government Accession No.	3. Recipient's Catalog No.																											
4. Title and Subtitle Final Report of New Car Assessment Program Side Impact Pole Testing of a 2025 Acura ADX 5-Door SUV NHTSA No.: O20255301		5. Report Date December 23, 2025																											
		6. Performing Organization Code MGA																											
7. Author(s) Ben Fischer, Program Manager		8. Performing Organization Report No. SideNCAPPole-MGA-25-024																											
9. Performing Organization Name and Address MGA Research Corporation 5000 Warren Road Burlington, WI 53105		10. Work Unit No.																											
		11. Contract or Grant No. 693JJ920D000017																											
12. Sponsoring Agency Name and Address United States Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards Mail Code: NRM-100 1200 New Jersey Ave, SE Washington, DC 20590		13. Type of Report and Period Covered: Final Test Report July 16, 2025 to December 23, 2025																											
		14. Sponsoring Agency Code NRM-100																											
15. Supplementary Notes																													
16. Abstract A 32.20 km/h, 75° oblique impact Side NCAP Test was conducted on the subject 2025 Acura ADX 5-Door SUV in accordance with the specifications of the Office of Crashworthiness Standards Side NCAP Pole Laboratory Test Procedure for the generation of consumer information on vehicle side pole crash protection. The test was conducted at the MGA Research Corporation facility in Burlington, Wisconsin on July 16, 2025. The impact velocity was 32.08 km/h, and the ambient temperature at the struck (driver's) side of the target vehicle at the time of impact was 22.0°C. The test vehicle post-test maximum crush was 314 mm at level 3. The test vehicle's performance was as follows: <table border="1" style="margin: 10px auto; border-collapse: collapse; text-align: center;"> <thead> <tr> <th rowspan="2" style="text-align: left;">Measurement Description</th> <th rowspan="2">Units</th> <th colspan="2">Driver ATD (SID-IIs)</th> </tr> <tr> <th>Threshold</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td style="text-align: left;">Head Injury Criteria (HIC₃₆)</td> <td></td> <td>1000</td> <td>233.348</td> </tr> <tr> <td style="text-align: left;">Resultant Lower Spine Acceleration</td> <td>g</td> <td>82</td> <td>39.518</td> </tr> <tr> <td style="text-align: left;">Total Pelvic Force (sum of acetabular and iliac forces)</td> <td>N</td> <td>5525</td> <td>2958.640</td> </tr> <tr> <td style="text-align: left;">Maximum Thoracic Rib Deflection</td> <td>mm</td> <td>38*</td> <td>21.950</td> </tr> <tr> <td style="text-align: left;">Maximum Abdomen Rib Deflection</td> <td>mm</td> <td>45*</td> <td>18.409</td> </tr> </tbody> </table> *Proposed IARV The two doors on the struck side of the vehicle did not separate from the body at the hinges or latches and the opposite door(s) did not open during the side impact event.				Measurement Description	Units	Driver ATD (SID-IIs)		Threshold	Result	Head Injury Criteria (HIC ₃₆)		1000	233.348	Resultant Lower Spine Acceleration	g	82	39.518	Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	2958.640	Maximum Thoracic Rib Deflection	mm	38*	21.950	Maximum Abdomen Rib Deflection	mm	45*	18.409
Measurement Description	Units	Driver ATD (SID-IIs)																											
		Threshold	Result																										
Head Injury Criteria (HIC ₃₆)		1000	233.348																										
Resultant Lower Spine Acceleration	g	82	39.518																										
Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	2958.640																										
Maximum Thoracic Rib Deflection	mm	38*	21.950																										
Maximum Abdomen Rib Deflection	mm	45*	18.409																										
17. Key Words New Car Assessment Program (NCAP) Side Impact Pole Part 572V SID-IIs		18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division 1200 New Jersey Ave, SE Washington, DC 20590																											
19. Security Classification of Report Unclassified	20. Security Classification of Page Unclassified	21. No. of Pages 121	22. Price																										

TABLE OF CONTENTS

<u>Section</u>		<u>Page No.</u>
1	Purpose and Summary of Test	1
2	Occupant and Vehicle Information / Data Sheets	3
<u>Data Sheet No.</u>		<u>Page No.</u>
1	General Test and Vehicle Parameter Data	4
2	Seat, Seat Belt, Steering Wheel Adjustment and Fuel System Data	8
3	Dummy Longitudinal Clearance Dimensions	11
4	Dummy Lateral Clearance Dimensions	12
5	Camera and Instrumentation Data	13
6	Test Vehicle Accelerometer Locations	14
7	Rigid Pole Load Cell Data	15
8	Post-Test Observations	16
9	Test Vehicle Profile Measurements	18
10	Test Vehicle Exterior Crush Measurements	19
11	FMVSS No. 301 Static Rollover Results	23
12	Dummy/Vehicle Temperature and Humidity Stabilization Data	24
<u>Appendix</u>		
A	Photographs	A
B	Dummy Response Data Plots	B
C	Dummy Qualification and Performance Verification	C
D	Test Equipment and Instrumentation Calibration	D

SECTION 1 PURPOSE AND SUMMARY OF TEST

PURPOSE

This side pole impact test is part of the MY 2025 New Car Assessment Program Side Impact Test Program, sponsored by the National Highway Traffic Safety Administration (NHTSA), under Contract No. 693JJ920D000017. The purpose of this test is to generate comparative side impact performance in a 2025 Acura ADX 5-Door SUV. The side impact test was conducted in accordance with the Office of Crashworthiness Standard's Side NCAP Pole Laboratory Test Procedure, dated March 2020.

SUMMARY

A rigid pole side impact test was conducted on a 2025 Acura ADX 5-Door SUV. The subject vehicle was towed into the rigid pole at an angle of 75° and a velocity of 32.08 km/h. The test was conducted by MGA Research Corporation in Burlington, Wisconsin on July 16, 2025. Pre-test and post-test photographs of the test vehicle and side impact dummy (SID-IIs) are included in Appendix A of this report.

One Part 572V (SID-IIs) dummy was placed in the driver designated seating position according to instructions specified in the OCWS Side NCAP Pole Laboratory Test Procedure dated March 2020. Camera locations and other pertinent camera information are included in this report.

The Part 572V (SID-IIs) dummy was instrumented accordingly:

- Primary and Redundant Head CG Triaxial Accelerometers
- Head Triaxial Angular Rate Sensors
- Thorax Upper, Middle, and Lower Rib Displacement Potentiometers
- Abdomen Upper Rib and Lower Rib Displacement Potentiometers
- Lower Spine (T12) Triaxial Accelerometers
- Iliac Load Cell
- Acetabulum Load Cell

Appendix B contains the vehicle and dummy response data. Dummy configuration and performance verification data can be found in Appendix C of this report. Appendix D contains the test equipment and instrumentation calibration data.

Injury readings for the SID-IIs dummy were recorded as follows:

Measurement Description	Units	Driver ATD (SID-IIs)	
		Threshold	Result
Head Injury Criteria (HIC36)		1000	233.348
Resultant Lower Spine Acceleration	g	82	39.518
Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	2958.640
Maximum Thoracic Rib Deflection	mm	38*	21.950
Maximum Abdomen Rib Deflection	mm	45*	18.409

*Proposed IARV

Supplemental restraint information is given below:

Restraint Type	Left Front (Driver) Occupant Location 1		Left Rear (Passenger) Occupant Location 4	
	Mounted	Deployed	Mounted	Deployed
Frontal Airbag	Yes	No		
Knee Airbag	Yes	No		
Side Curtain Airbag	Yes	Yes	Yes	Yes
Side Torso/Pelvis Airbag	Yes	Yes	No	
Side Torso Airbag			Yes	Yes
Seat Belt Pretensioner	Yes	Yes	Yes	Yes
Seat Belt Load Limiter	Yes		Yes	
Other				

The test data can be found on the NHTSA website at www.nhtsa.gov

GENERAL COMMENTS

None.

MGA does not endorse or certify products. The manufacturer's name appears solely for identification purposes.

SECTION 2
OCCUPANT AND VEHICLE INFORMATION / DATA SHEETS

DATA SHEET NO. 1
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2025 Acura ADX 5-Door SUV
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: O20255301
 Test Date: 7/16/2025

TEST VEHICLE INFORMATION AND OPTIONS

NHTSA No.	O20255301	Traction Control System (TCS)	Yes
Model Year	2025	Auto-Leveling System	No
Make	Acura	Automatic Door Locks (ADL)	Yes
Model	ADX	Power Window Auto-Reverse	Yes
Body Style	5-Door SUV	Other Optional Feature	No
VIN	3HDSA1H38SM701023	Driver Front Airbag	Yes
Body Color	Platinum Pearl White	Driver Curtain Airbag	Yes
Odometer Reading (km/mi)	19 km / 12 mi	Driver Head/Torso Airbag	No
Engine Displacement (L)	1.5	Driver Torso Airbag	No
Type/No. Cylinders	Inline 4	Driver Torso/Pelvis Airbag	Yes
Engine Placement	Lateral	Driver Pelvis Airbag	No
Transmission Type	Automatic	Driver Knee Airbag	Yes
Transmission Speeds	CVT	Rear Pass. Curtain Airbag	Yes
Overdrive	Yes	Rear Pass. Head/Torso Airbag	No
Final Drive	FWD	Rear Pass. Torso Airbag	Yes
Roof Rack	No	Rear Pass. Torso/Pelvis Airbag	No
Sunroof/T-Top	Yes	Rear Pass. Pelvis Airbag	No
Running Boards	No	Driver Seat Belt Pretensioner	Yes
Tilt Steering Wheel	Yes	Rear Pass. Seat Belt Pretensioner	Yes
Power Seats	Driver	Driver Load Limiter	Yes
Anti-Lock Brakes (ABS)	Yes	Rear Pass. Load Limiter	Yes
		Other Safety Restraint	N/A

Does owner's manual provide instruction to turn off automatic door locks?	Yes
---	-----

DATA FROM CERTIFICATION LABEL

Manufactured By	HONDA DE MEXICO S.A. DE C.V.	GVWR (kg)	2020
Date of Manufacture	02/25	GAWR Front (kg)	1095
Vehicle Type	MPV	GAWR Rear (kg)	925

VEHICLE SEATING AND WEIGHT CAPACITY DATA

Measured Parameter	Front	Rear	Third	Total	
Designated Seating Capacity (DSC)	2	3		5	
Capacity Weight (VCW) (kg)				385	(A)
DSC x 68 kg				340	(B)
Rated Cargo and Luggage Weight (RCLW) (kg)				45	(A-B)

VEHICLE SEAT TYPE


Seating Location	Type of Seat Pan				Type of Seat Back		
	Bucket	Bench	Split Bench	Contoured	Fixed	Adjustable	
						w/ Lever	w/ Knob
Front Seat	X					X	
Rear or Second Row				X	X		
Third Row Seat							

DATA SHEET NO. 1 (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2025 Acura ADX 5-Door SUV
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: O20255301
 Test Date: 7/16/2025

VEHICLE TIRE INFORMATION

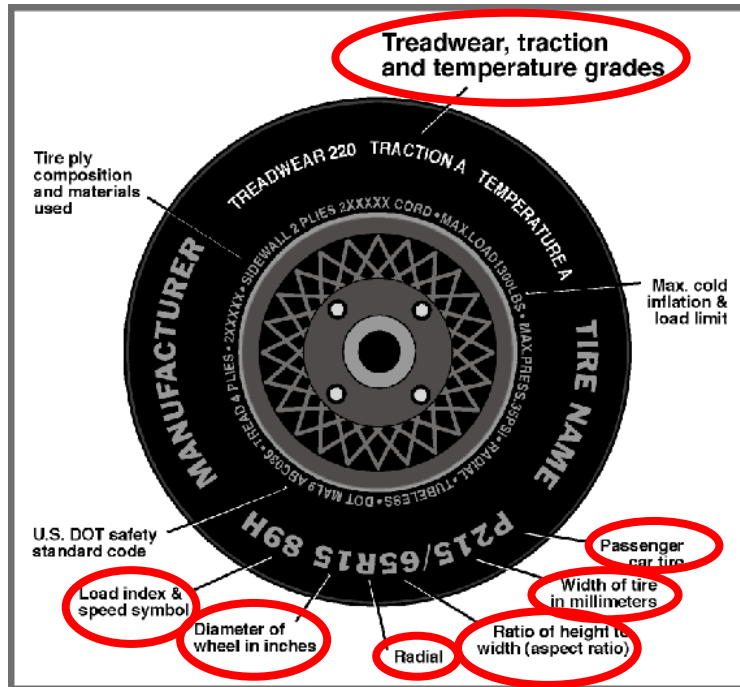

Measured Parameter	Front	Rear
Max. Tire Pressure (kPa)	300	300
Cold Pressure (kPa)	240	230
Recommended Tire Size	225/55R18	225/55R18
Tire Size on Vehicle	225/55R18	225/55R18
Tire Manufacturer	Michelin	Michelin
Tire Model	Primacy A/S	Primacy A/S
Treadwear	540	540
Traction	A	A
Temperature Grade	A	A
Tire Plies Sidewall	2 Polyester	2 Polyester
Tire Plies Body	2 Polyester, 2 Steel, 1 Polyamide	2 Polyester, 2 Steel, 1 Polyamide
Load Index/Speed Symbol	98H	98H
Tire Material	Rubber	Rubber
DOT Safety Code Left	03LYR 03MX 0225	03LYR 03MX 0225
DOT Safety Code Right	03LYR 03MX 0225	03LYR 03MX 0225

DATA SHEET NO. 1 (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2025 Acura ADX 5-Door SUV
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: O20255301
 Test Date: 7/16/2025

TEST PRESSURES

	Units	LF	RF	LR	RR
As Delivered	kPa	235	235	235	235
Tire Placard	kPa	240	240	230	230
Owner's Manual	kPa	240	240	230	230
As Tested	kPa	240	240	230	230

TEST AXLE VEHICLE WEIGHTS

	Units	As Delivered (UVW)			As Tested (ATW)			Fully Loaded		
		Front	Rear	Total	Front	Rear	Total	Front	Rear	Total
Left	kg	478.5	302.5		498.0	338.0		493.0	349.0	
Right	kg	426.5	319.0		431.5	350.0		426.0	355.5	
Ratio	%	59.3%	40.7%		57.5%	42.5%		56.6%	43.4%	
Totals	kg	905.0	621.5	1526.5	929.5	688.0	1617.5	919.0	704.5	1623.5

TARGET TEST WEIGHT CALCULATION

Measured Parameter	Units	Value	
Total Delivered Weight (UVW)	kg	1526.5	(A)
Actual Weight of 1 P572 ATD (SID-IIs) Used	kg	52	(B)
Rated Cargo/Luggage Weight (RCLW)	kg	45	(C)
Calculated Test Vehicle Target Weight (TVTW)	kg	1623.5	(A+B+C)

Does the measured As Tested Vehicle Weight lie within the required weight range (i.e. Calculated Test Vehicle Target Weight – 4.5 kg to 9 kg)? **YES**

TEST VEHICLE ATTITUDES AND CG

	Units	As Delivered	As Tested	Fully Loaded	Meets Requirement
Driver Door Sill Angle (front-to-back)*	deg	-0.7	-0.5	0.6	Yes
Front Pass. Door Sill Angle (front-to-back)*	deg	-0.8	-0.2	0.5	Yes
Front Bumper Angle (left-to-right)**	deg	-0.3	-0.3	-0.3	Yes
Rear Bumper Angle (left-to-right)**	deg	0.0	0.0	0.0	Yes
Vehicle CG (Aft of Front Axle)	mm	1080	1128	1151	
Vehicle CG (Left (+) / Right (-) from Longitudinal Centerline)	mm	18	27	29	

* ND=Nose Down (-), NU=Nose Up (+) ** LD=Left Down (-), LU=Left Up (+)

*** The "As Tested" vehicle attitude measurements must be equal to or between the "As Delivered" and "Fully Loaded" vehicle attitude measurements.

WEIGHT OF BALLAST AND VEHICLE COMPONENTS REMOVED TO MEET TVTW

Component Description	Units	Weight
Weight of Ballast Added	kg	0
Components Removed: LR/RR taillight	kg	6

Test height adjustable suspension setting, if applicable:	Not Applicable
---	----------------

DATA SHEET NO. 1 (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2025 Acura ADX 5-Door SUV
Test Program: NCAP Side Pole Impact Test

NHTSA No.: O20255301
Test Date: 7/16/2025

TEST SURFACE MARKINGS

	Distance from 75° Impact Location Line (mm)
Fore 25 mm Target	930
Aft 25 mm Target	934

DATA SHEET NO. 2
SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA

Test Vehicle: 2025 Acura ADX 5-Door SUV
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: O20255301
 Test Date: 7/16/2025

SEAT POSITIONING

The driver's seat, front center seat (if applicable), and right front passenger's seat should be set to the forward-most, mid-height, mid-angle position. The struck-side rear passenger's seat, rear center seat, and non-struck side rear passenger's seats should be set to the rear-most, lowest, mid-angle position.

SCRL ANGLE RANGE

Seat	SCRL (°)		
	Max	Min	Mid
Driver Seat	30.0	17.2	23.6
Front Passenger Seat	Fixed	Fixed	Fixed
Front Center Seat			
Struck Side Rear Seat	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Fixed
Rear Center Seat	Fixed	Fixed	Fixed

SEAT HEIGHT AND ANGLE

Seat	As-Tested SCRL Angle (Mid) (°)	As-Tested SCR Height (mm)	SCR Height Position	SCR Height (mm)		
				Rear-Most	Mid	Forward-Most
Driver Seat	23.6	29	Max	58	58	58
			Mid	29	29	29
			Min	0	0	0
Front Passenger Seat	Fixed	Fixed	Max	Fixed	Fixed	Fixed
			Mid	Fixed	Fixed	Fixed
			Min	Fixed	Fixed	Fixed
Front Center Seat			Max			
			Mid			
			Min			
Struck Side Rear Seat	Fixed	Fixed	Max	Fixed	Fixed	Fixed
			Mid	Fixed	Fixed	Fixed
			Min	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Max	Fixed	Fixed	Fixed
			Mid	Fixed	Fixed	Fixed
			Min	Fixed	Fixed	Fixed
Rear Center Seat	Fixed	Fixed	Max	Fixed	Fixed	Fixed
			Mid	Fixed	Fixed	Fixed
			Min	Fixed	Fixed	Fixed

DATA SHEET NO. 2 (CONTINUED)
SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA

Test Vehicle: 2025 Acura ADX 5-Door SUV
 Test Program: NCAP Side Pole Impact Test


NHTSA No.: O20255301
 Test Date: 7/16/2025

SEAT FORE/AFT POSITIONS

Seat	Total Fore/Aft Travel		Test Position from Forward-Most Position	
	mm	Detents (1 st as 1)	mm	Detent (1 st as 0)
Driver Seat	240		0	
Front Passenger Seat	210	22	0	0
Front Center Seat				
Struck Side Rear Seat	Fixed		Fixed	
Non-Struck Side Rear Seat	Fixed		Fixed	
Rear Center Seat	Fixed		Fixed	

SEAT BACK ANGLE ADJUSTMENT

The driver's seat back is positioned such that the dummy's head is level. The front center and front passenger's seat backs are positioned in a similar manner as the driver's seat back. The struck-side rear passenger seat back is positioned in accordance with the information provided by the manufacturer on S1 – Vehicle Setup Information for the 5th percentile female dummy in a Side NCAP MDB test. The rear center and non-struck side rear passenger's seat back is set to match the struck-side rear seat back.



Seat	Total Seat Back Angle Range		Test Position from Vertical	
	Degrees	Detents (1 st as 1)	Degrees	Detent (1 st as 0)
Driver Seat	85.5		-7.5	
Front Passenger Seat	66.4	34	-7.8	1
Front Center Seat				
Struck Side Rear Seat	Fixed		Fixed	
Non-Struck Side Rear Seat	Fixed		Fixed	
Rear Center Seat	Fixed		Fixed	

All seat back angles measured on outboard headrest post.

SEAT BELT ANCHORAGE ADJUSTMENT

Seat belt anchorages are adjusted in accordance with the information provided by the manufacturer on S1 – Vehicle Setup Information.

	Total # of Positions	Placed in Position #
Driver Seat	4	0 (Uppermost as 0)

HEAD RESTRAINT ADJUSTMENT

Head restraints are adjusted to the lowest and most full forward in-use position.

	Total # of Positions	Placed in Position #
Driver Seat	5	0 (Lowest as 0) / Fixed Fore-Aft

DATA SHEET NO. 2 (CONTINUED)
SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA


Test Vehicle: 2025 Acura ADX 5-Door SUV
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: O20255301
 Test Date: 7/16/2025

STEERING COLUMN ADJUSTMENT


Steering wheel and column adjustments are made so that the steering wheel geometric locus is described when it moves through its full range of motion.

	Wheel Angle (°)	Fore/Aft Position (mm)
Lowermost, Position 1	68.4	
Geometric Center, Position 2	65.7	
Uppermost, Position 3	62.9	
Telescoping Steering Wheel Travel		40
Test Position	65.7	20

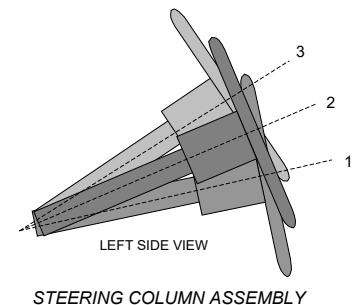

FUEL PUMP

The vehicle is equipped with an electronic fuel pump. The fuel pump will run when the engine is running. The pump will also briefly run when the ignition key is turned to the “on” position. The filler neck is located on the driver’s side.

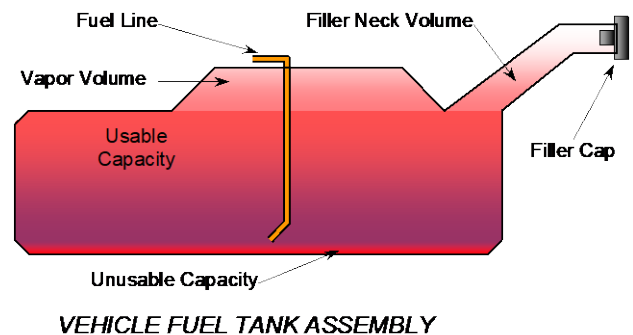

FUEL TANK CAPACITY DATA


	Liters
Usable Capacity of Standard Tank (see S1 – Vehicle Setup Information)	53.0
Usable Capacity of Optional Tank (see S1 – Vehicle Setup Information)	
Usable Capacity of Standard Tank as Specified in Owner’s Manual	53.0
Usable Capacity of Optional Tank as Specified in Owner’s Manual	
93% of Usable Capacity	49.3
Actual Amount of Solvent Used	49.2
1/3 of Usable Capacity	17.7

Is the actual amount of solvent used in the test equal to 93% $\pm$ 1% of the Usable Capacity stated in S1 – Vehicle Setup Information? **YES**

DATA SHEET NO. 3
DUMMY LONGITUDINAL CLEARANCE DIMENSIONS

Test Vehicle: 2025 Acura ADX 5-Door SUV
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: O20255301
 Test Date: 7/16/2025

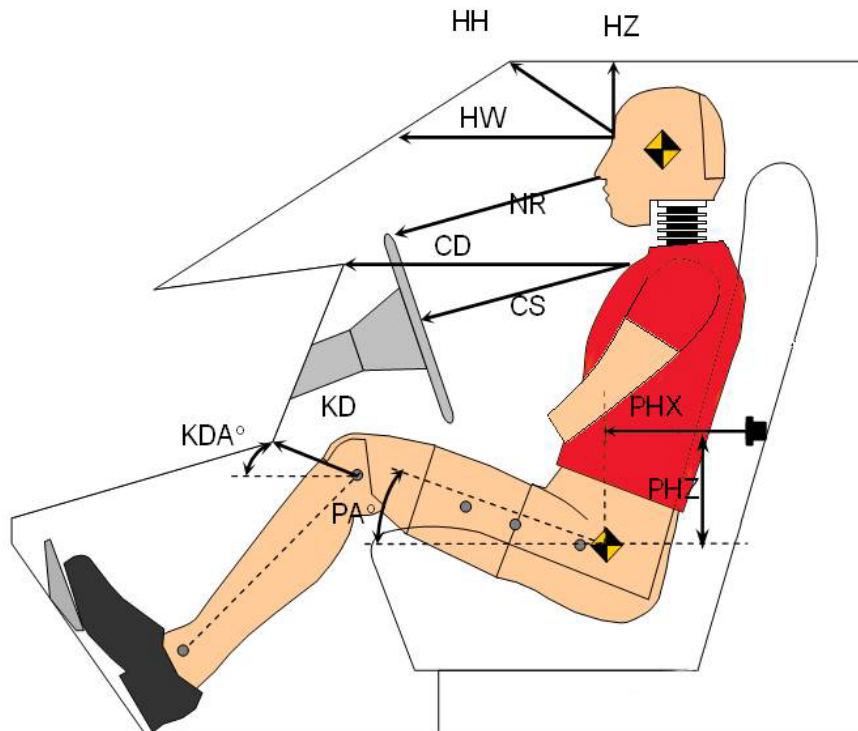


LEFT SIDE VIEW

Code	Measurement Description	Driver	
		Length (mm)	Angle (°)
HH	Head to Header	278	
HW	Head to Windshield	570	
HZ	Head to Roof Liner	188	
NR	Nose to Rim/Seat Back	218	
CD	Chest to Dashboard/Seat Back	388	
CS	Chest to Steering Wheel	148	
KDL / KDAL	Left Knee to Dash/Seat Back	136	41.7
KDR / KDAL	Right Knee to Dash/Seat Back	134	36.0
PAX	Pelvic Tilt Angle X		21.1
PAY	Pelvic Tilt Angle Y		-0.6
PHX	Hip Point to Striker (X-Axis)	372	
PHZ	Hip Point to Striker (Z-Axis)	215	

DATA SHEET NO. 4
DUMMY LATERAL CLEARANCE DIMENSIONS

Test Vehicle: 2025 Acura ADX 5-Door SUV
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: O20255301
 Test Date: 7/16/2025

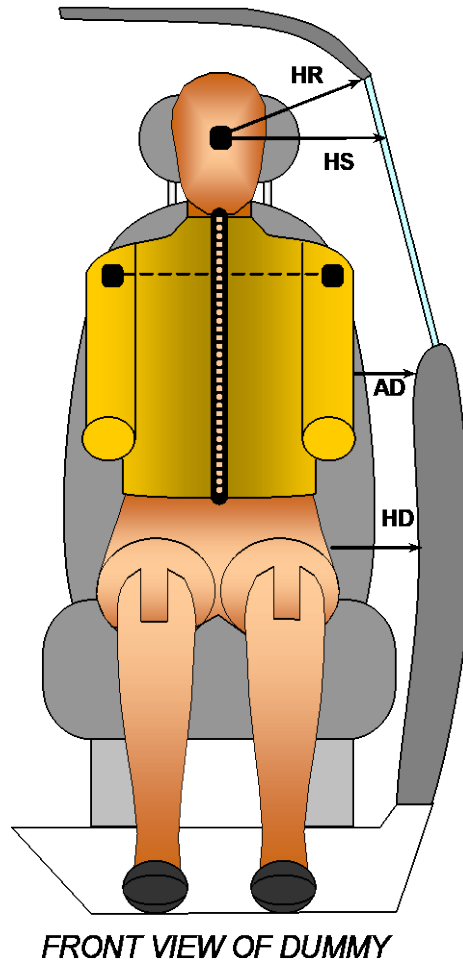


Code	Measurement Description	Driver
		Length (mm)
HR	Head to Side Header	282
HS	Head to Side Window	373
AD	Arm to Door	163
HD	Hip Point to Door	169

DATA SHEET NO. 5
CAMERA AND INSTRUMENTATION DATA

Test Vehicle: 2025 Acura ADX 5-Door SUV
Test Program: NCAP Side Pole Impact Test

NHTSA No.: O20255301
Test Date: 7/16/2025

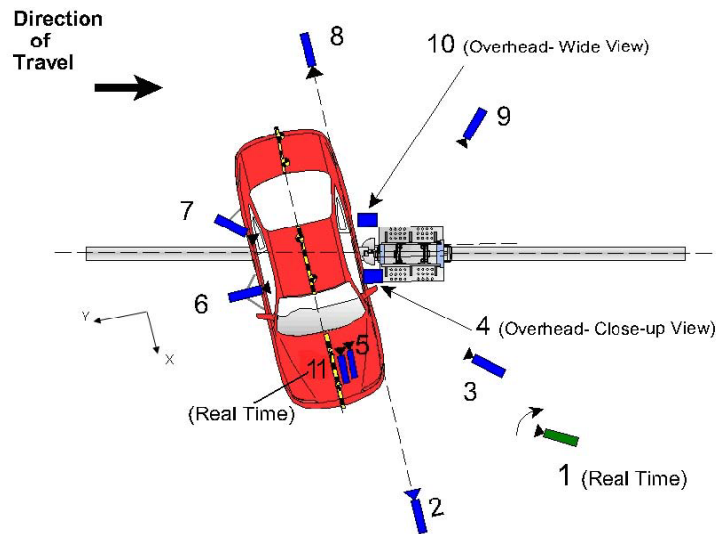

Reference: (from Point of Impact for X and Y; from Ground for Z):
+X = Forward of Impact, + Y = Right of Impact, +Z = Down

No.	Camera View	Coordinates* (mm)			Lens (mm)	Frame Rate (fps)
		X	Y	Z		
1	Real-Time Pan View					30
2	Front Ground Level	7990	-110	-1550	35	1000
3	Impact Side 45° Forward	4500	-1925	-1540	12	1000
4	Overhead Closeup	0	0	-6700	85	1000
5	Onboard – Driver Front				16	1000
6	Onboard – Driver Side				8.5	1000
7	Onboard – Driver Rear				8.5	1000
8	Rear Ground Level	-6520	-340	-1545	24	1000
9	Impact Side 45° Rearward	-3025	-3475	-1600	12	1000
10	Overhead Wide View	80	890	-6540	12	1000
11	Real-Time Dummy Front View					30

*All measurements accurate to ± 6 mm

Note: Vehicle was positioned at a 75° angle to the rigid pole.

Explain why camera(s) did not operate as intended: None


INSTRUMENTATION

	Number of Channels
Driver Dummy	19
Vehicle Structure	18
Pole Load Cells	8
Total	45

DATA SHEET NO. 6 **TEST VEHICLE ACCELEROMETER LOCATIONS**

Test Vehicle: 2025 Acura ADX 5-Door SUV
Test Program: NCAP Side Pole Impact Test

NHTSA No.: O20255301
Test Date: 7/16/2025

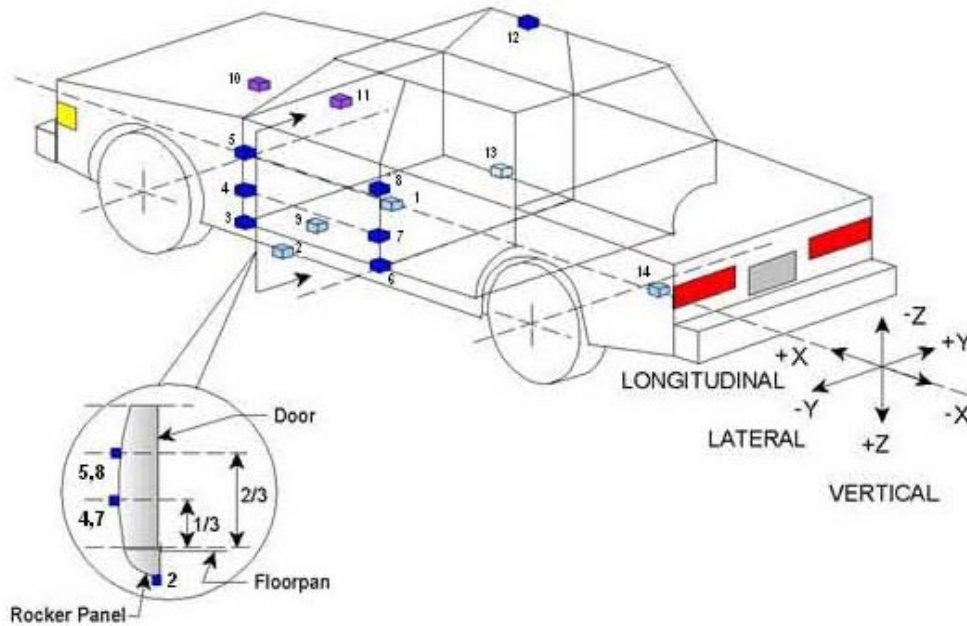

TEST VEHICLE ACCELEROMETER LOCATIONS


No.	ID	Coordinates (mm)		
		X	Y	Z
1	Vehicle CG	2529	160	-353
2	Left Floor Sill	3029	-689	-288
3	A Pillar Sill	3145	-738	-260
4	A Pillar Low	3136	-830	-578
5	A Pillar Mid	3139	-827	-789
6	B Pillar Sill	2040	-736	-265
7	B Pillar Low	2010	-718	-599
8	B Pillar Mid	2005	-711	-769
9	Driver Seat Track	2187	-360	-377
10	Engine Top	3807	127	-850
11	Firewall	3540	-39	-938
12	Right Roof	2018	527	-1585
13	Right Sill	3015	686	-283
14	Rear Floorpan	1063	-18	-578

Reference: X – Test Vehicle Rear Bumper (+forward)
Y – Test Vehicle Centerline (+ to right)
Z – Ground Plane (+ down)

DATA SHEET NO. 7
RIGID POLE LOAD CELL DATA

Test Vehicle: 2025 Acura ADX 5-Door SUV
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: O20255301
 Test Date: 7/16/2025

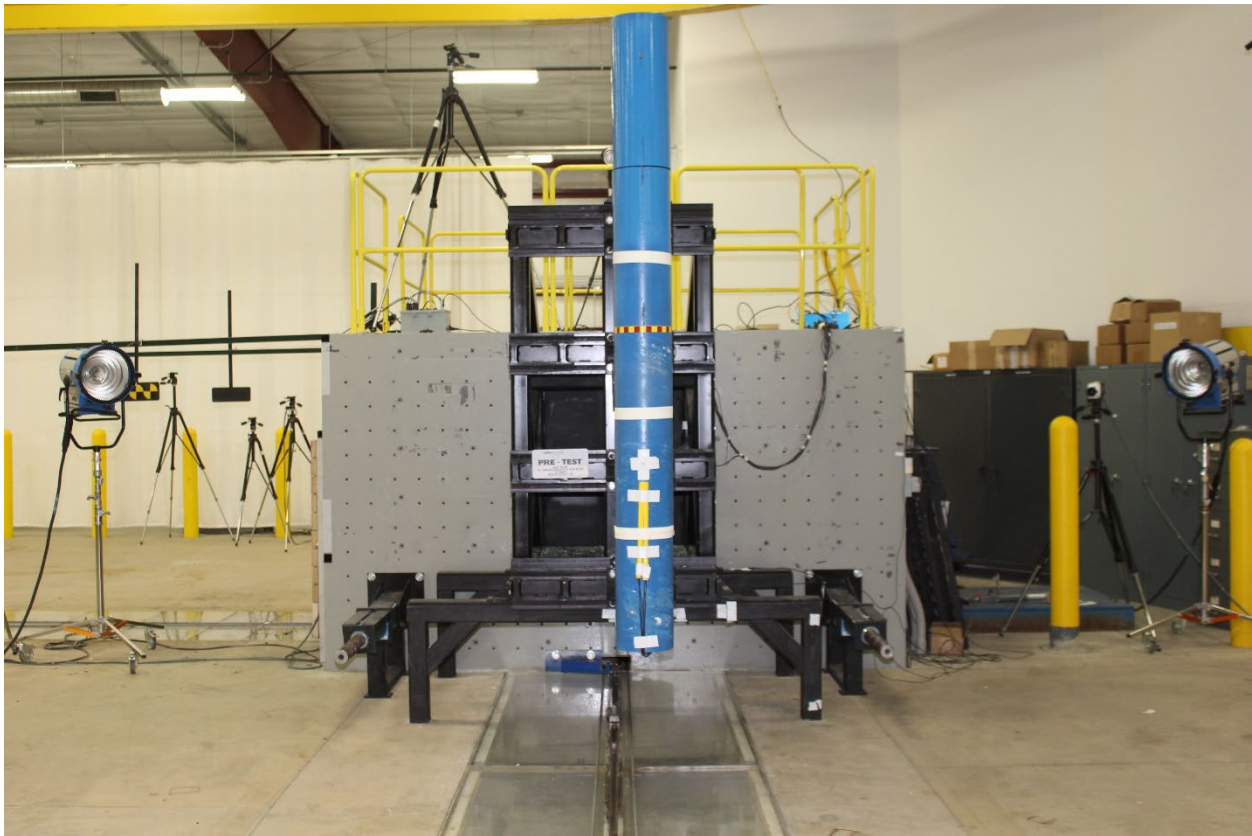

254 mm Diameter Rigid Pole

Load Cell Locations	
ID	Height from Impact Surface (mm)
1	182
2	470
3	698
4	986
5	1212
6	1641
7	1854
8	2053

**DATA SHEET NO. 8
POST-TEST OBSERVATIONS**

Test Vehicle: 2025 Acura ADX 5-Door SUV
Test Program: NCAP Side Pole Impact Test

NHTSA No.: O20255301
Test Date: 7/16/2025

TEST DUMMY INFORMATION AND CONTACT POINTS

Description	Driver Dummy (SID-IIs)
Face	Curtain Airbag
Top of Head	Curtain Airbag
Left Side of Head	Curtain Airbag
Back of Head	Curtain Airbag, Headrest
Left Shoulder	Side Torso/Pelvis Airbag
Upper Torso	Seatback
Lower Torso	Side Torso/Pelvis Airbag, Seatback
Left Hip	Side Torso/Pelvis Airbag, Seat Cushion
Left Knee	None

POST-TEST DOOR PERFORMANCE

Description	Struck Side		Non-Struck Side		Rear Hatch
	Front	Rear	Front	Rear	
Remained Closed and Operational	No	No	Yes	Yes	Yes
Total Separation from Vehicle at Hinges or Latches	No	No	No	No	No
Latch or Hinge Systems Pulled Out of Their Anchorages	No	No	No	No	No
Disengaged from Latched Position	No	No	No	No	No
Latch Separated from Striker	No	No	No	No	No
Jammed Shut	Yes	Yes	No	No	No
If Door Opened at Striker, Record Width of Opening at Striker (mm)					

POST-TEST SEAT PERFORMANCE

Description	Struck Side		Non-Struck Side	
	Front	Rear	Front	Rear
Seat Movement Along Seat Track	No	No	No	No
Seat Disengagement from Floor Pan	No	No	No	No
Seat Back Movement from Initial Position	No	No	No	No
Seat Back Collapse	No	No	No	No

POST-TEST STRUCTURAL OBSERVATIONS

Critical Areas of Performance	Observations and Conclusions
Pillar Performance	No Separation
Sill Separation	No Separation
Windshield Damage	Cracked
Side Window Damage	LF window broken
Other Notable Effects	Windshield separated from a-pillar, roof, and portions of cowl

DATA SHEET NO. 8 (CONTINUED)
POST-TEST OBSERVATIONS

Test Vehicle: 2025 Acura ADX 5-Door SUV
Test Program: NCAP Side Pole Impact Test

NHTSA No.: O20255301
Test Date: 7/16/2025

SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION

Restraint Type	Struck Side Driver		Struck Side Left Rear Passenger	
	Mounted	Deployed	Mounted	Deployed
Frontal Airbag	Yes	No		
Knee Airbag	Yes	No		
Side Curtain Airbag	Yes	Yes	Yes	Yes
Side Torso/Pelvis Airbag	Yes	Yes	No	
Side Torso Airbag			Yes	Yes
Seat Belt Pretensioner	Yes	Yes	Yes	Yes
Seat Belt Load Limiter	Yes		Yes	
Other				


SPEED, ANGLE AT IMPACT, AND IMPACT POINT LOCATION DATA

Measured Parameter	Units	Tolerance	Value
Vertical Impact Reference Line (Aft of Front Axle) (Intended Impact Point)	mm		1084
Actual Impact Point (Aft of Front Axle)	mm		1087
Horizontal Offset (+forward / -rearward)	mm	+/- 38 of Intended Impact Point	-3
Angle Between Vehicle's Longitudinal Centerline and Line of Forward Motion	degrees	75 +/- 3	74.6
Trap No. 1 Velocity (Primary)	km/h	31.4 to 33.0	32.08
Trap No. 2 Velocity (Redundant)	km/h	31.4 to 33.0	32.13

DATA SHEET NO. 9
TEST VEHICLE PROFILE MEASUREMENTS

Test Vehicle: 2025 Acura ADX 5-Door SUV
Test Program: NCAP Side Pole Impact Test

NHTSA No.: O20255301
Test Date: 7/16/2025

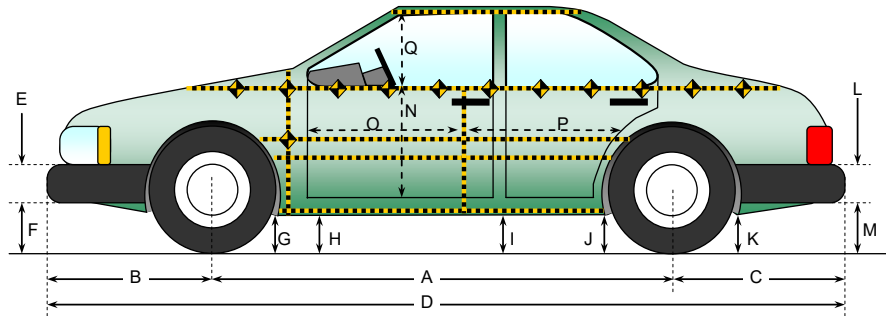

All measurements in (mm) with tolerance of ± 3 mm

LEFT SIDE VIEW


VEHICLE PRE- AND POST-TEST MEASUREMENT INFORMATION

Code	Measurement Description	Pre-Test	Post-Test	Change
A	Wheelbase	2652	2618	-34
B	Front Axle to FSOV	1064	1069	5
C	Rear Axle to RSOV	985	993	8
D	Total Vehicle Length at Centerline	4700	4680	-20
E	Front Bumper Thickness	99	95	-4
F	Front Bumper Bottom to Ground	448	460	12
G	Sill Height at Front Wheel Well	255	256	1
H	Sill Height at Front Door Leading Edge	238	239	1
I	Sill Height at B-Pillar	258	286	28
J1	Sill Height at Rear Wheel Well	260	275	15
J2	Pinch Weld Height at Rear Wheel Well	244	258	14
K	Sill Height Aft of Rear Wheel Well	289	303	14
L	Rear Bumper Thickness	108	112	4
M	Rear Bumper Bottom to Ground	441	430	-11
N	Sill Height to Bottom of Front Window Sill	759	796	37
O	Front Door Leading Edge to Impact CL	592	506	-86
P	Rear Door Trailing Edge to Impact CL	1229	1162	-67
Q	Front Window Opening	381	361	-20
R	Right Side Length	3837	3846	9
S	Left Side Length	3838	3789	-49
T	Vehicle Width at B-Pillars	1815	1742	-73
U	Front Wheel Track Width	1579		
V	Rear Wheel Track Width	1572		

DATA SHEET NO. 10 **TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS**

Test Vehicle: 2025 Acura ADX 5-Door SUV
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: O20255301
 Test Date: 7/16/2025

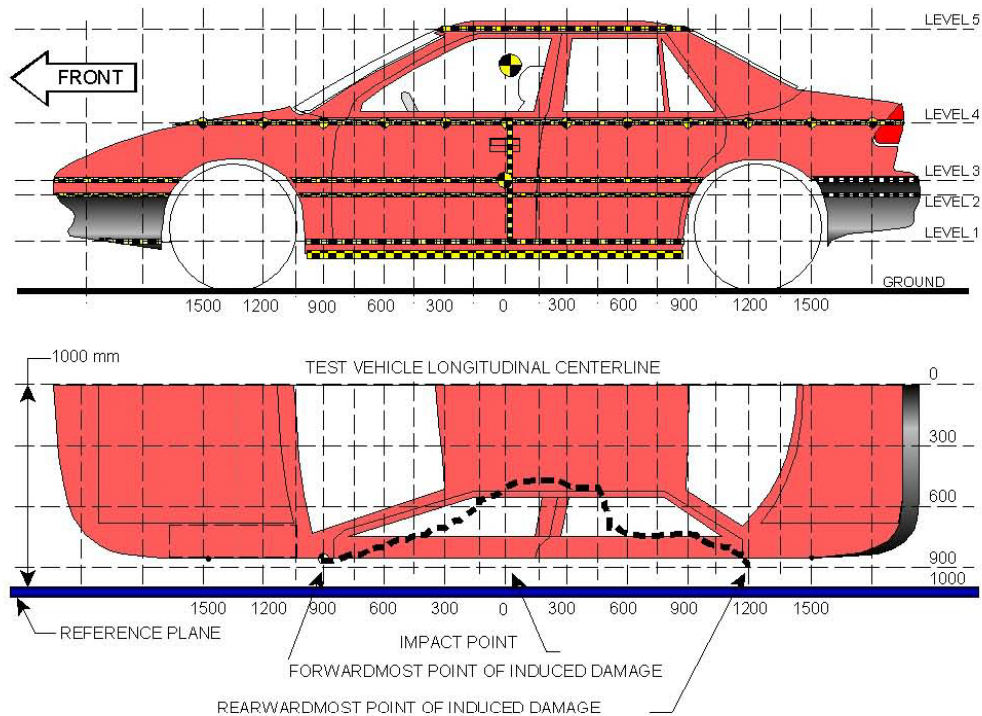

NOTE: The measurements are taken along the vertical impact reference line.
 Vehicle measurements forward of the vertical impact reference line are negative.

MAXIMUM EXTERIOR CRUSH MEASUREMENTS

Level	Measurement Description	Height Above Ground	Maximum Exterior Static Crush	Distance from Impact
1	Sill Top	361	260	75
2	Occupant H-Point	649	304	75
3	Mid Door	724	314	75
4	Window Sill	1076	252	75
5	Window Top	1519	86	0

DATA SHEET NO. 10 (CONTINUED)
TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS

Test Vehicle: 2025 Acura ADX 5-Door SUV
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: O20255301
 Test Date: 7/16/2025


Pre-test measurements are taken when the vehicle is in the “As Tested” weight condition. Vehicle measurements forward of the vertical impact reference line are negative. The crush profile grid is established prior to the test based on an estimated impact point.

	Pre-Test					Post-Test					Exterior Crush				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
-2700															
-2550															
-2400															
-2250															
-2100															
-1950															
-1800															
-1650															
-1500															
-1350															
-1200															
-1050															
-900															
-825			926	792				930	799				-4	-7	
-750		925	921	798			928	926	799			-3	-5	-1	
-675		916	918	803			921	921	798			-5	-3	5	
-600	887	915	922	809		878	918	923	798		9	-3	-1	11	
-525	879	916	921	807		842	880	888	783		37	36	33	24	
-450	879	914	920	812		818	838	848	764		61	76	72	48	
-375	879	913	918	805		794	804	807	723		85	109	111	82	
-300	879	911	917	821		770	777	776	702		109	134	141	119	
-225	879	910	916	822		745	750	749	687		134	160	167	135	
-150	879	909	915	826		716	718	718	668		163	191	197	158	
-75	879	909	914	829	606	679	677	673	639	522	200	232	241	190	84
0	879	908	914	832	622	636	630	628	601	536	243	278	286	231	86
75	879	907	913	835	630	619	603	599	583	548	260	304	314	252	82
150	878	906	912	837	635	641	618	612	614	561	237	288	300	223	74
225	878	905	911	838	638	694	662	653	657	569	184	243	258	181	69
300	879	904	910	840	639	741	700	696	693	578	138	204	214	147	61
375	878	904	909	841	639	787	743	745	733	586	91	161	164	108	53
450	878	904	908	841	638	832	793	794	765	592	46	111	114	76	46
525	876	904	908	842	637	878	838	840	778	598	-2	66	68	64	39
600	876	904	907	842	635	825	850	852	795	605	51	54	55	47	30
675	876	905	907	842	634	835	859	860	803	610	41	46	47	39	24
750	874	907	909	841	632	841	869	869	809	613	33	38	40	32	19
825	874	911	912	840	629	851	881	881	815	614	23	30	31	25	15
900	874	914	915	840	624	859	891	891	821	613	15	23	24	19	11
1050	881	918	920	844	612	884	911	912	838	608	-3	7	8	6	4
1200		918	919	853	594		926	924	859	592		-8	-5	-6	2
1350			925	863	571			947	882	571			-22	-19	0
1500				871	539				903	539				-32	0
1650				872					878					-6	
1800				867					883					-16	
1950				850					850					0	
2100				824					823					1	
2250															
2400															
2550															
2700															

DATA SHEET NO. 10 (CONTINUED)
TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS

Test Vehicle: 2025 Acura ADX 5-Door SUV
Test Program: NCAP Side Pole Impact Test


NHTSA No.: O20255301
Test Date: 7/16/2025

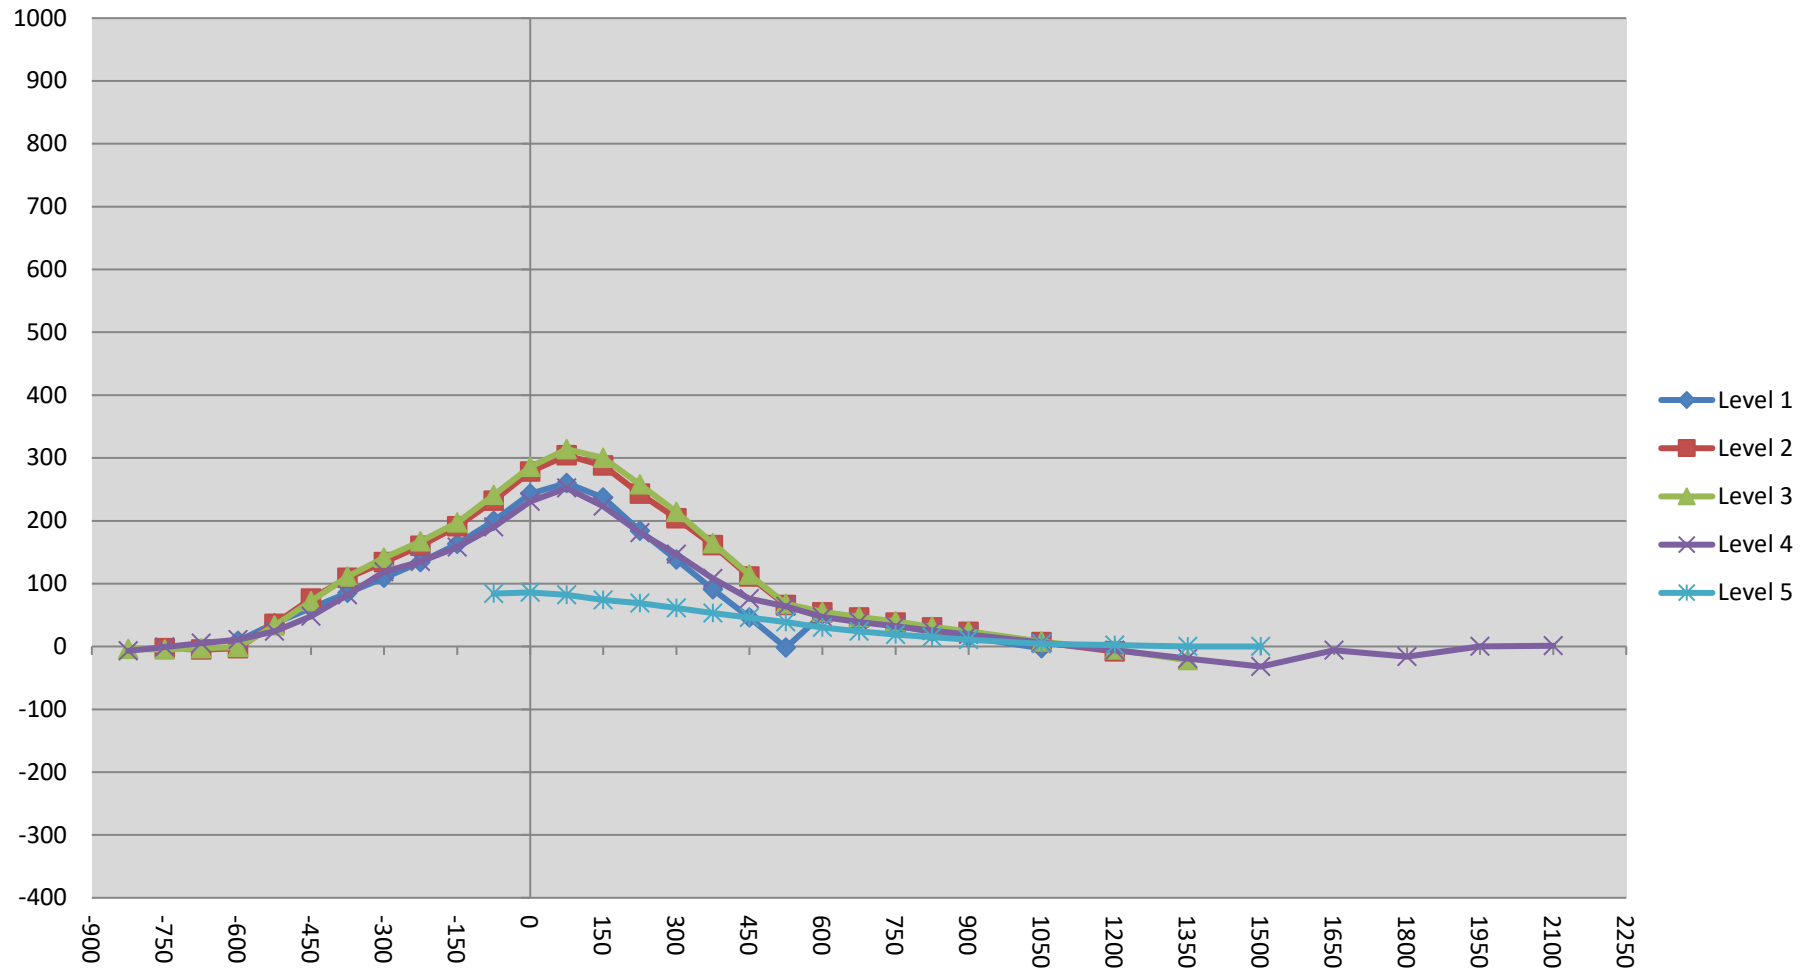

DATA SHEET NO. 10 (CONTINUED)
TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS

Test Vehicle: 2025 Acura ADX 5-Door SUV
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: O20255301
 Test Date: 7/16/2025

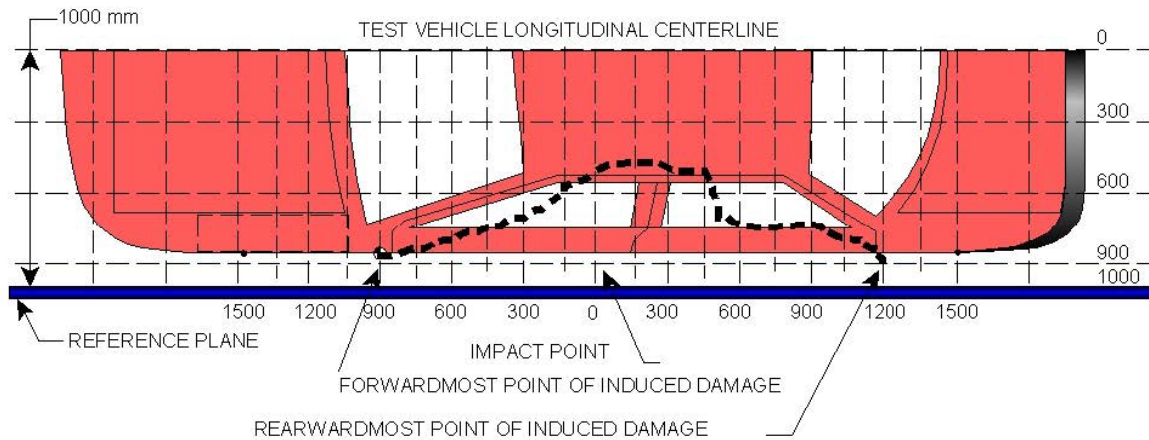

VEHICLE DAMAGE PROFILE DISTANCES

DPD	Distance from Impact Point (mm)	Level	Pre-Test (mm)	Post-Test (mm)	Max. Static Crush (mm)
1	600	3	148	93	55
2	459	3	199	92	107
3	155	3	384	88	296
4	-116	3	303	85	218
5	-390	3	186	82	104
6	-600	3	77	78	-1

DATA SHEET NO. 11
FMVSS NO. 301 STATIC ROLLOVER RESULTS

Test Vehicle: 2025 Acura ADX 5-Door SUV
 Test Program: NCAP Side Pole Impact Test


NHTSA No.: O20255301
 Test Date: 7/16/2025

Test Time: 11:33 am

Temperature: 22.0°C

- A. From impact until vehicle motion ceases: (Maximum Allowable = 1 ounce) 0.0 oz.
 B. For the 5 minute period after motion ceases: (Maximum Allowable = 5 ounces) 0.0 oz.
 C. For the following 25 minutes: (Maximum Allowable = 1 ounce / minute) None
 D. Spillage Details: None

FMVSS 301 STATIC ROLLOVER DATA

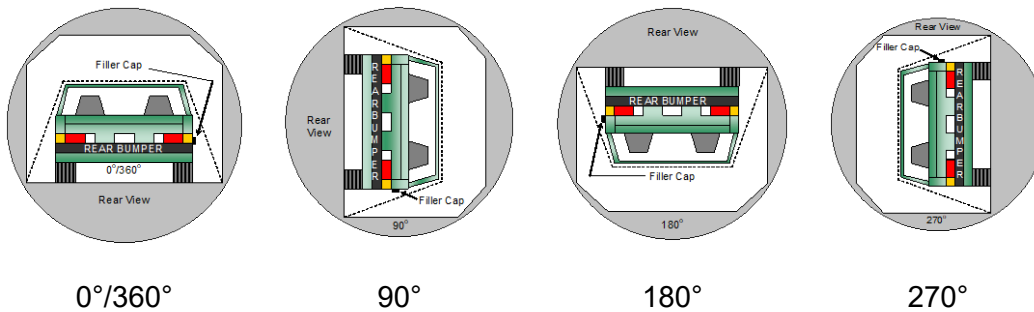

ROLLOVER SOLVENT COLLECTION TIME TABLE IN SECONDS

Test Phase	Rotation Time	Hold Time	Total Time
0° to 90°	111	300	411
90° to 180°	110	300	410
180° to 270°	108	300	408
270° to 360°	111	300	411

FMVSS 301 ROLLOVER SPILLAGE TABLE (UNITS IN OUNCES)

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° to 90°	0.0	0.0	0.0	
90° to 180°	0.0	0.0	0.0	
180° to 270°	0.0	0.0	0.0	
270° to 360°	0.0	0.0	0.0	


ROLLOVER SOLVENT SPILLAGE LOCATION TABLE

Test Phase	Spillage Location
0° to 90°	
90° to 180°	
180° to 270°	
270° to 360°	

DATA SHEET NO. 12
DUMMY/VEHICLE TEMPERATURE AND HUMIDITY STABILIZATION DATA

Test Vehicle: 2025 Acura ADX 5-Door SUV
 Test Program: NCAP Side Pole Impact Test

NHTSA No.: O20255301
 Test Date: 7/16/2025

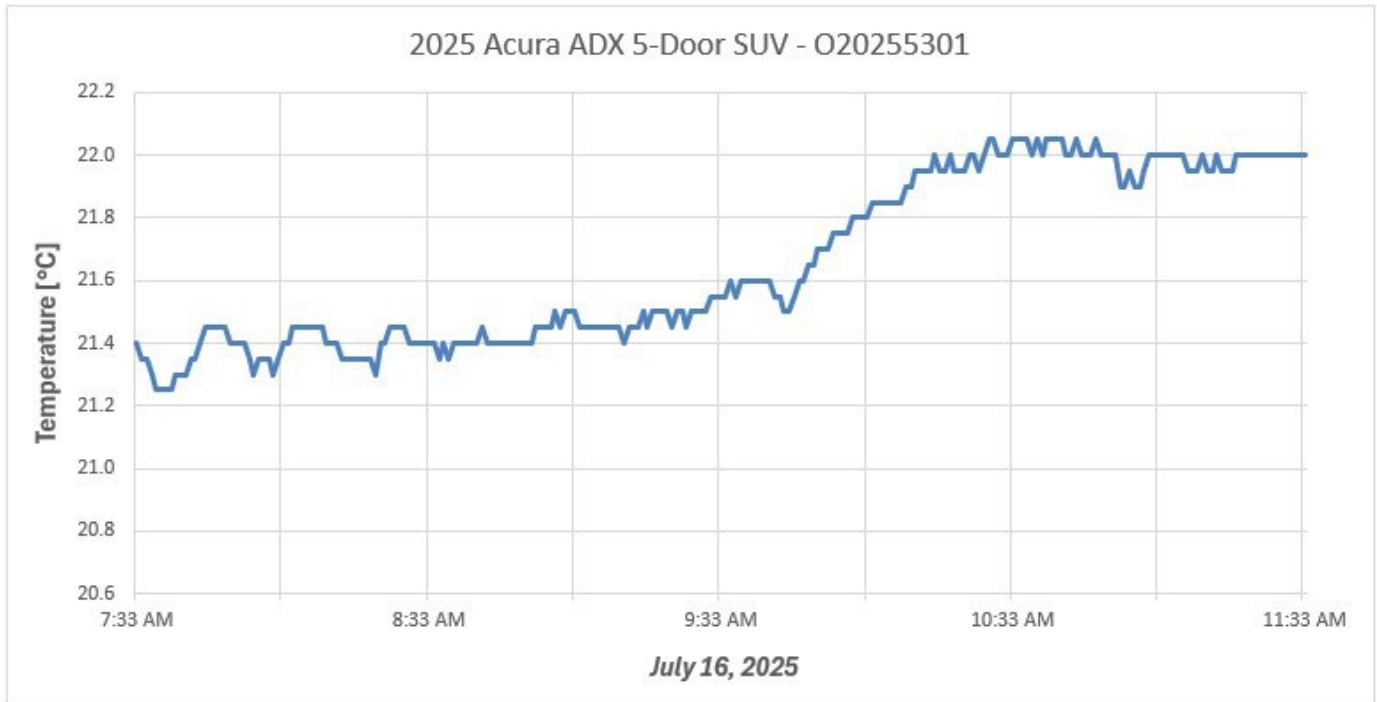

Serial #	Description	Maximum	Average	Minimum	Units
W2922089	VSC South Hall - Temp (3018)	22.05	21.65	21.25	°C

**APPENDIX A
PHOTOGRAPHS**

TABLE OF PHOTOGRAPHS

		<u>Page No.</u>
Photo No. 001	As Delivered Right Front $\frac{3}{4}$ View of Test Vehicle	A-1
Photo No. 002	As Delivered Left Rear $\frac{3}{4}$ View of Test Vehicle	A-1
Photo No. 003	Pre-Test Frontal View of Test Vehicle	A-2
Photo No. 004	Post-Test Frontal View of Test Vehicle	A-2
Photo No. 005	Pre-Test Left Front $\frac{3}{4}$ View of Test Vehicle	A-3
Photo No. 006	Post-Test Left Front $\frac{3}{4}$ View of Test Vehicle	A-3
Photo No. 007	Pre-Test Left Side View of Test Vehicle	A-4
Photo No. 008	Post-Test Left Side View of Test Vehicle	A-4
Photo No. 009	Pre-Test Left Rear $\frac{3}{4}$ View of Test Vehicle	A-5
Photo No. 010	Post-Test Left Rear $\frac{3}{4}$ View of Test Vehicle	A-5
Photo No. 011	Pre-Test Rear View of Test Vehicle	A-6
Photo No. 012	Post-Test Rear View of Test Vehicle	A-6
Photo No. 013	Pre-Test Right Side View of Test Vehicle	A-7
Photo No. 014	Post-Test Right Side View of Test Vehicle	A-7
Photo No. 015	Pre-Test Overhead View of Test Area	A-8
Photo No. 016	Post-Test Overhead View of Test Area	A-8
Photo No. 017	Pre-Test Left Side View of Pole Positioned Against Side of Vehicle	A-9
Photo No. 018	Pre-Test Right Side View of Pole Positioned Against Side of Vehicle	A-9
Photo No. 019	Pre-Test Close-Up View of Impact Point Target	A-10
Photo No. 020	Post-Test Close-Up View of Impact Point Target Showing Impact Location	A-10
Photo No. 021	Pre-Test Front Close-Up View of Dummy Head and Chest	A-11
Photo No. 022	Post-Test Front Close-Up View of Dummy	A-11
Photo No. 023	Pre-Test Left Side View of Dummy Showing Belt and Chalking	A-12
Photo No. 024	Pre-Test Left Side View of Dummy Shoulder and Door Top View	A-12
Photo No. 025	Post-Test Left Side View of Dummy Shoulder and Door Top View	A-13
Photo No. 026	Pre-Test Front View of Seat Back Prior to Dummy Positioning	A-13
Photo No. 027	Pre-Test Front Close-Up View of Dummy Head and Shoulders in Relation to Head Restraint	A-14
Photo No. 028	Pre-Test Front View of Seat Pan Prior to Dummy Positioning	A-14
Photo No. 029	Pre-Test Overhead View of Dummy Thighs on Seat Pan	A-15

		<u>Page No.</u>
Photo No. 030	Pre-Test Left Side View of Dummy's Neck Showing Position of Adjustable Neck Bracket	A-15
Photo No. 031	Pre-Test Left Side View of Dummy's Head Showing Dummy's Head is Level	A-16
Photo No. 032	Pre-Test Placement of Dummy's Feet	A-16
Photo No. 033	Pre-Test View of Belt Anchorage for Dummy	A-17
Photo No. 034	Pre-Test Left Side View of Steering Wheel	A-17
Photo No. 035	Pre-Test View of Disengaged Parking Brake	A-18
Photo No. 036	Pre-Test View of Parking Brake	A-18
Photo No. 037	Pre-Test Close-Up Left Side View of Driver Seat Track	A-19
Photo No. 038	Pre-Test Close-Up Left Side View of Driver Seat Back	A-19
Photo No. 039	Pre-Test Close-Up View of Driver Seat Back or Head Restraint	A-20
Photo No. 040	Pre-Test Dummy and Door Clearance View	A-20
Photo No. 041	Post-Test Dummy and Door Clearance View	A-21
Photo No. 042	Pre-Test Right Side View of Dummy and Front Seat of Occupant Compartment	A-21
Photo No. 043	Post-Test Right Side View of Dummy and Front Seat of Occupant Compartment	A-22
Photo No. 044	Pre-Test Inner Door Panel View	A-22
Photo No. 045	Post-Test Inner Door Panel View Showing Dummy Contact Location	A-23
Photo No. 046	Post-Test Dummy Close-Up Head Contact with Vehicle Interior View	A-23
Photo No. 047	Post-Test Dummy Close-Up Head Contact with Side Air Bag View	A-24
Photo No. 048	Post-Test Dummy Close-Up Torso Contact with Vehicle Interior View	A-24
Photo No. 049	Post-Test Dummy Close-Up Torso Contact with Side Air Bag View	A-25
Photo No. 050	Post-Test Dummy Close-Up Pelvis Contact with Vehicle Interior View	A-25
Photo No. 051	Post-Test Dummy Close-Up Pelvis Contact with Side Air Bag View	A-26
Photo No. 052	Post-Test Dummy Close-Up Knee Contact with Vehicle Interior View	A-26
Photo No. 053	Post-Test Right Side View of Dummy and Rear Seat of Occupant Compartment	A-27
Photo No. 054	Post-Test Inner Rear Passenger Torso Air Bag Deployment View	A-27
Photo No. 055	Pre-Test View of Fuel Filler Cap or Fuel Filler Neck	A-28
Photo No. 056	Post-Test View of Fuel Filler Cap or Fuel Filler Neck	A-28
Photo No. 057	Close-Up View of Vehicle's Certification Label	A-29

		<u>Page No.</u>
Photo No. 058	Close-Up View of Vehicle's Tire Information Placard or Label	A-29
Photo No. 059	Pre-Test Pole Barrier Front View	A-30
Photo No. 060	Post-Test Pole Barrier Front View	A-30
Photo No. 061	Pre-Test Pole Barrier Side View	A-31
Photo No. 062	Post-Test Pole Barrier Side View	A-31
Photo No. 063	Pre-Test Ballast View	A-32
Photo No. 064	Post-Test Primary and Redundant Speed Trap Read-Out	A-32
Photo No. 065	FMVSS No. 301 Static Rollover 0 Degrees	A-33
Photo No. 066	FMVSS No. 301 Static Rollover 90 Degrees	A-33
Photo No. 067	FMVSS No. 301 Static Rollover 180 Degrees	A-34
Photo No. 068	FMVSS No. 301 Static Rollover 270 Degrees	A-34
Photo No. 069	FMVSS No. 301 Static Rollover 360 Degrees	A-35
Photo No. 070	Impact Event	A-35
Photo No. 071	Monroney Label	A-36
Photo No. 072	Head Restraint Use and Adjustment Information from Vehicle Owner's Manual	A-36
Photo No. 073	Post-Test View of Shattered Vehicle Inner Door Panel	A-37



Photo No. 001 - As Delivered Right Front Three-Quarter View of Test Vehicle



Photo No. 002 - As Delivered Left Rear Three-Quarter View of Test Vehicle

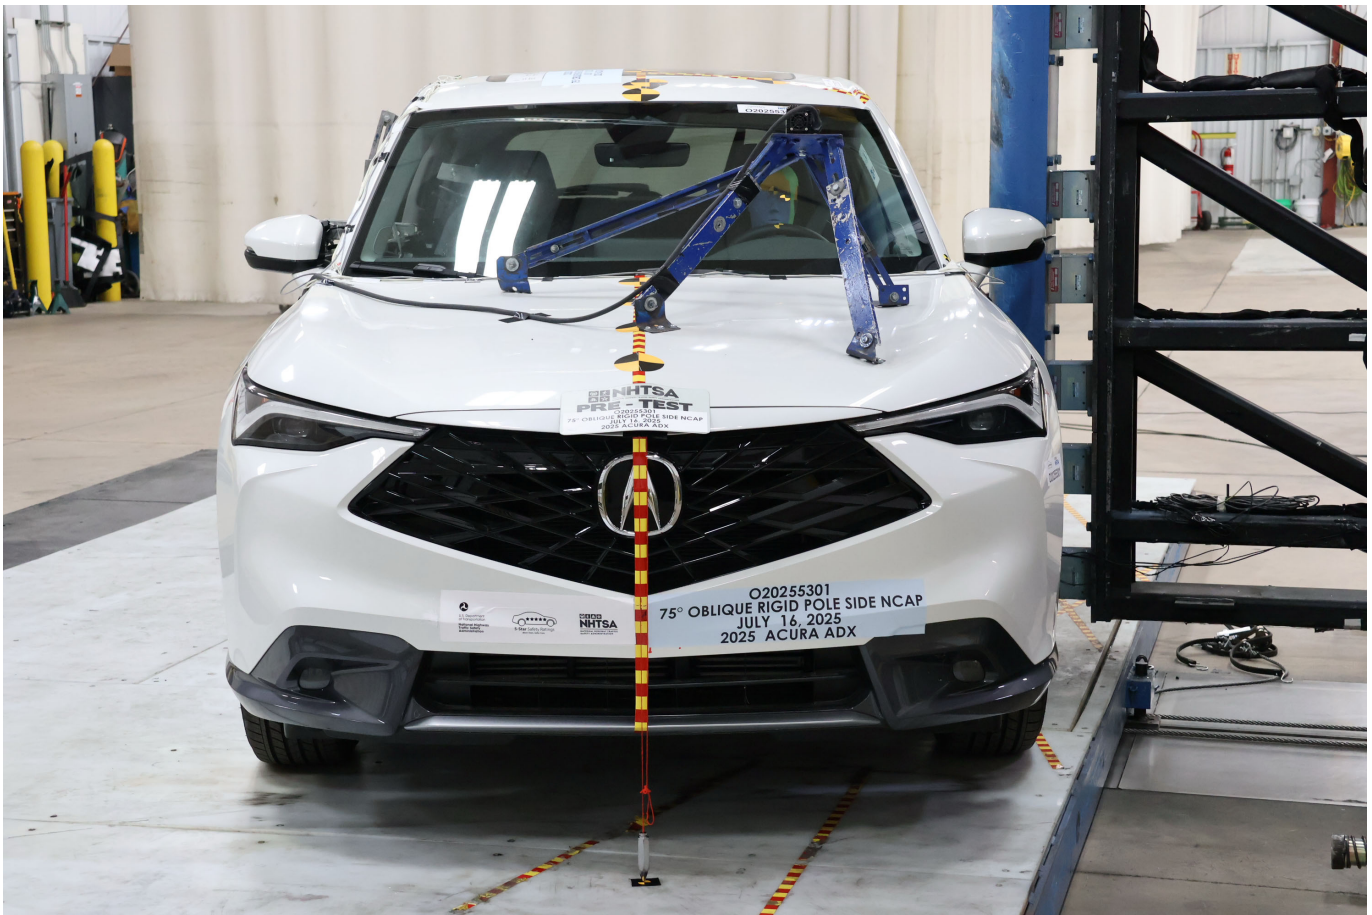


Photo No. 003 - Pre-Test Frontal View of Test Vehicle



Photo No. 004 - Post-Test Frontal View of Test Vehicle



Photo No. 005 - Pre-Test Left Front Three-Quarter View of Test Vehicle



Photo No. 006 - Post-Test Left Front Three-Quarter View of Test Vehicle

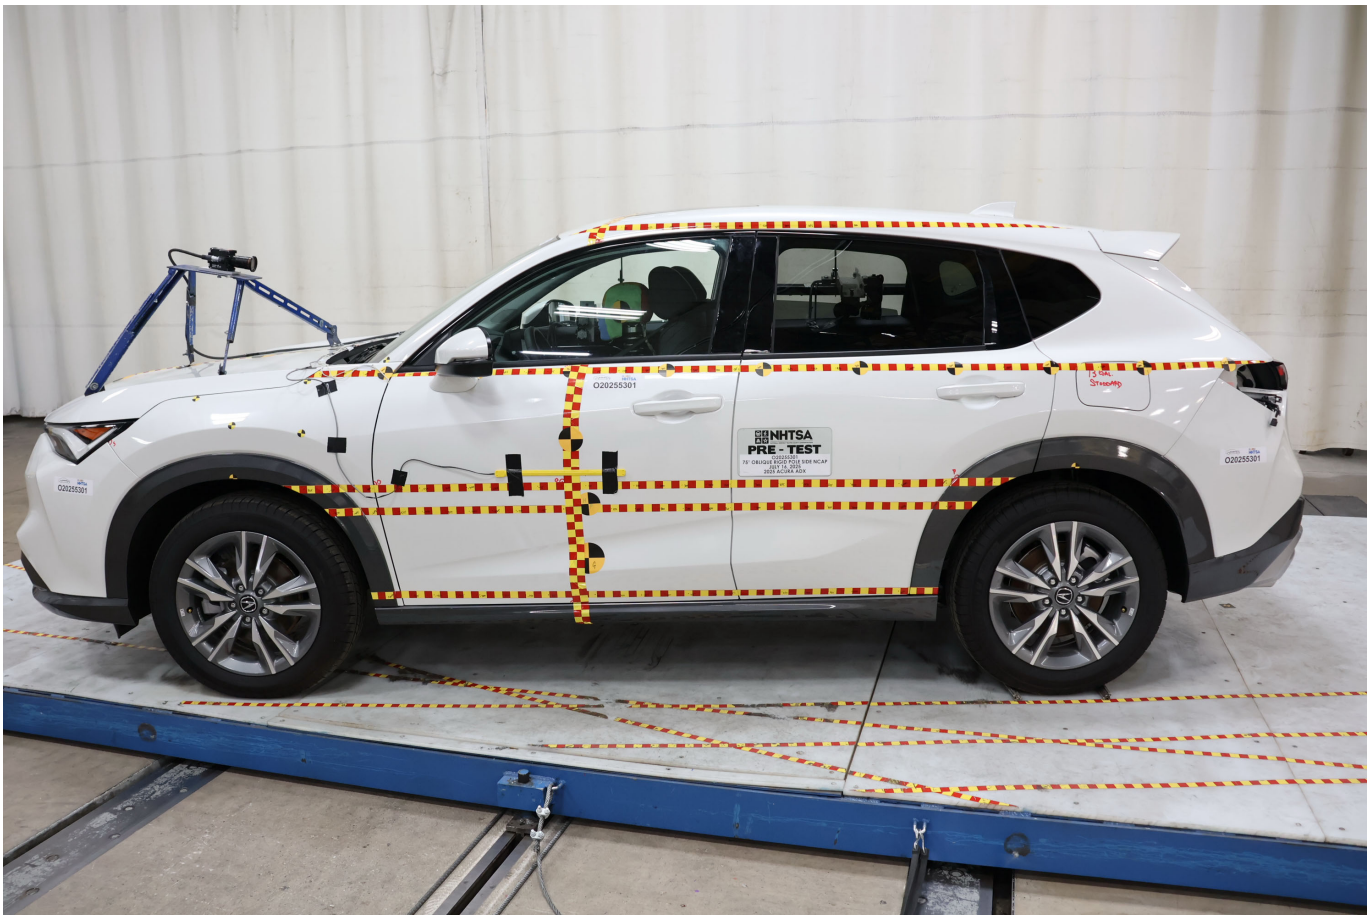


Photo No. 007 - Pre-Test Left Side View of Test Vehicle



Photo No. 008 - Post-Test Left Side View of Test Vehicle



Photo No. 009 - Pre-Test Left Rear Three-Quarter View of Test Vehicle



Photo No. 010 - Post-Test Left Rear Three-Quarter View of Test Vehicle



Photo No. 011 - Pre-Test Rear View of Test Vehicle



Photo No. 012 - Post-Test Rear View of Test Vehicle



Photo No. 013 - Pre-Test Right Side View of Test Vehicle



Photo No. 014 - Post-Test Right Side View of Test Vehicle

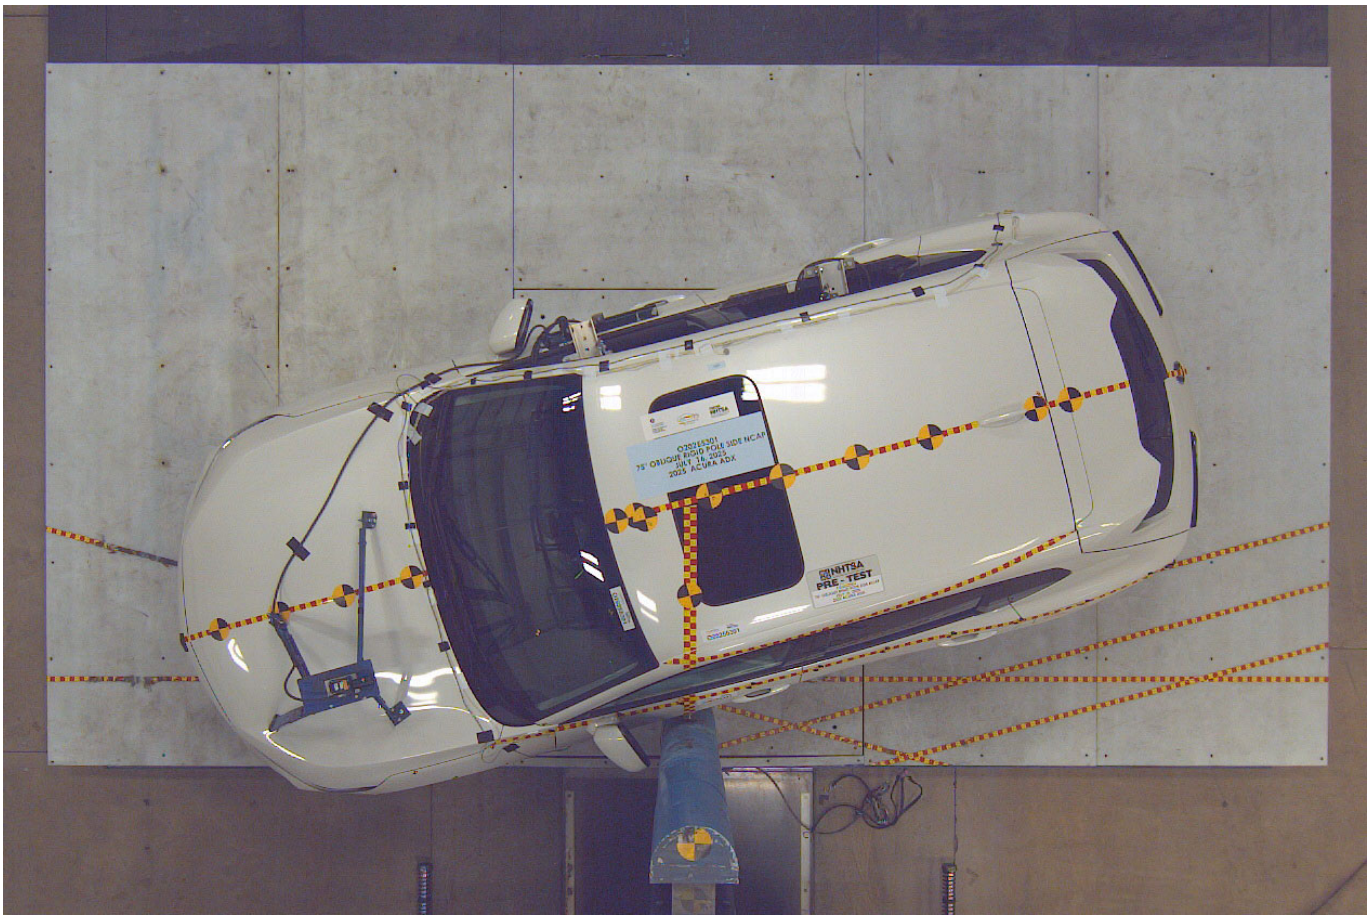


Photo No. 015 - Pre-Test Overhead View of Test Area

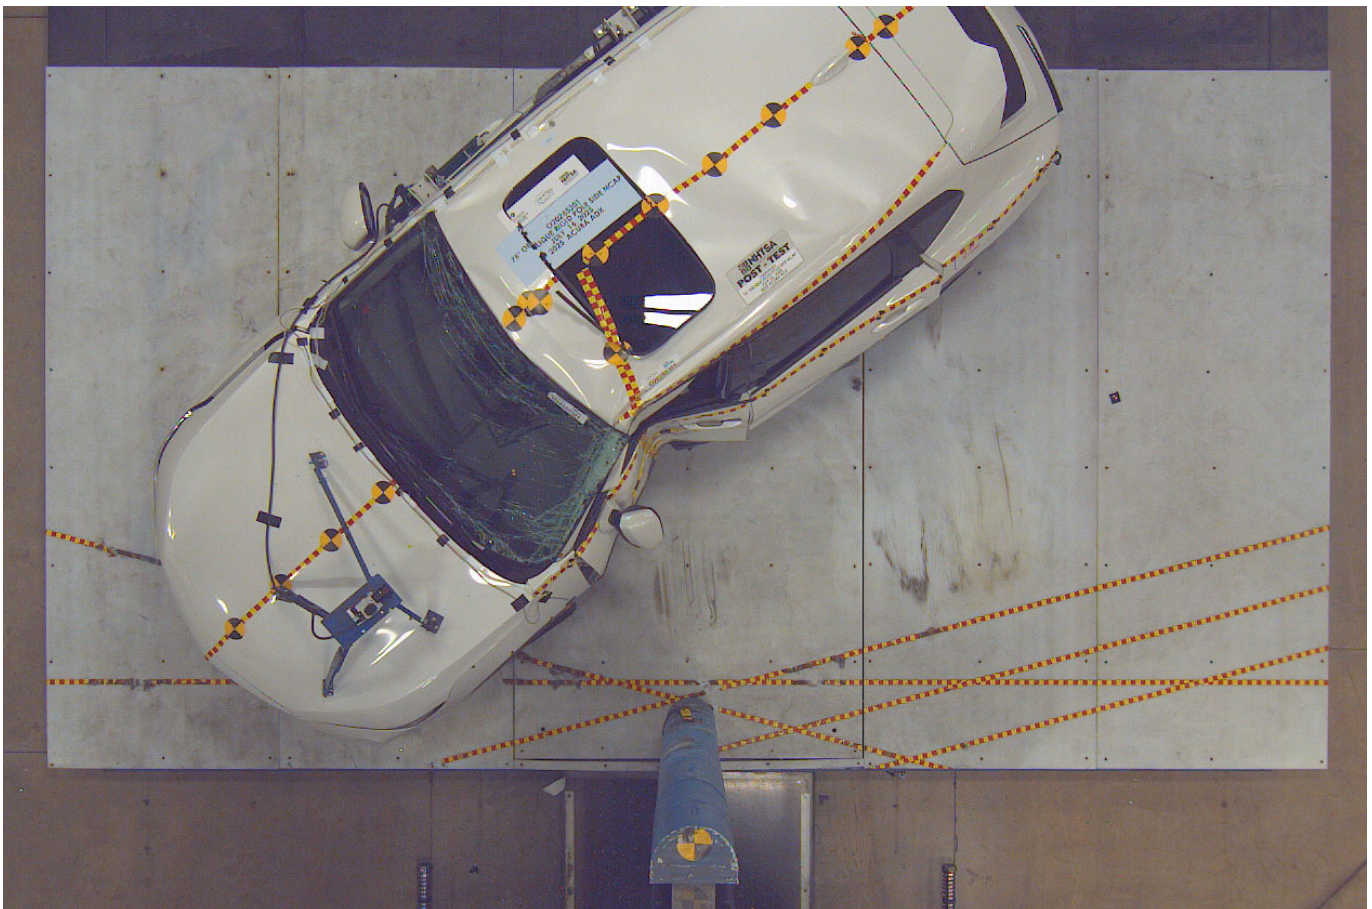


Photo No. 016 - Post-Test Overhead View of Test Area



Photo No. 017 - Pre-Test Left Side View of Pole Positioned Against Side of Vehicle



Photo No. 018 - Pre-Test Right Side View of Pole Positioned Against Side of Vehicle



Photo No. 019 - Pre-Test Close-Up View of Impact Point Target

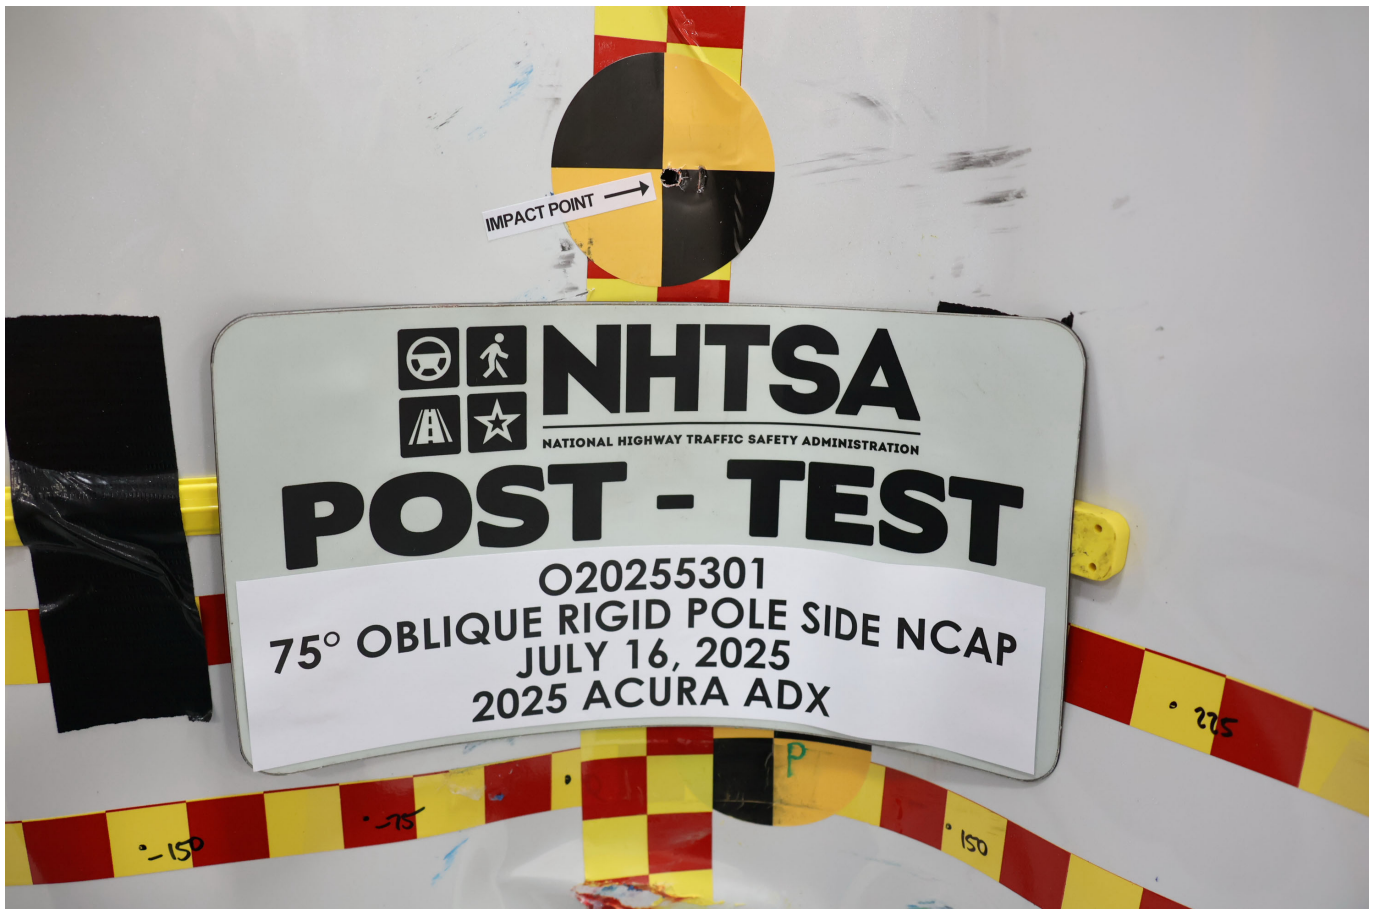


Photo No. 020 - Post-Test Close-Up View of Impact Point Target Showing Impact Location



Photo No. 021 - Pre-Test Front Close-Up View of Dummy Head and Chest



Photo No. 022 - Post-Test Front Close-Up View of Dummy



Photo No. 023 - Pre-Test Left Side View of Dummy Showing Belt and Chalking



Photo No. 024 - Pre-Test Left Side View of Dummy Shoulder and Door Top View



Photo No. 025 - Post-Test Left Side View of Dummy Shoulder and Door Top View



Photo No. 026 - Pre-Test Front View of Seat Back Prior to Dummy Positioning



Photo No. 027 - Pre-Test Front Close-Up View of Dummy Head and Shoulders in Relation to Head Restraint



Photo No. 028 - Pre-Test Front View of Seat Pan Prior to Dummy Positioning



Photo No. 029 - Pre-Test Overhead View of Dummy Thighs on Seat Pan



Photo No. 030 - Pre-Test Left Side View of Dummy's Neck Showing Position of Adjustable Neck Bracket



Photo No. 031 - Pre-Test Left Side View of Dummy's Head Showing Dummy's Head is Level



Photo No. 032 - Pre-Test Placement of Dummy's Feet



Photo No. 033 - Pre-Test View of Belt Anchorage for Dummy

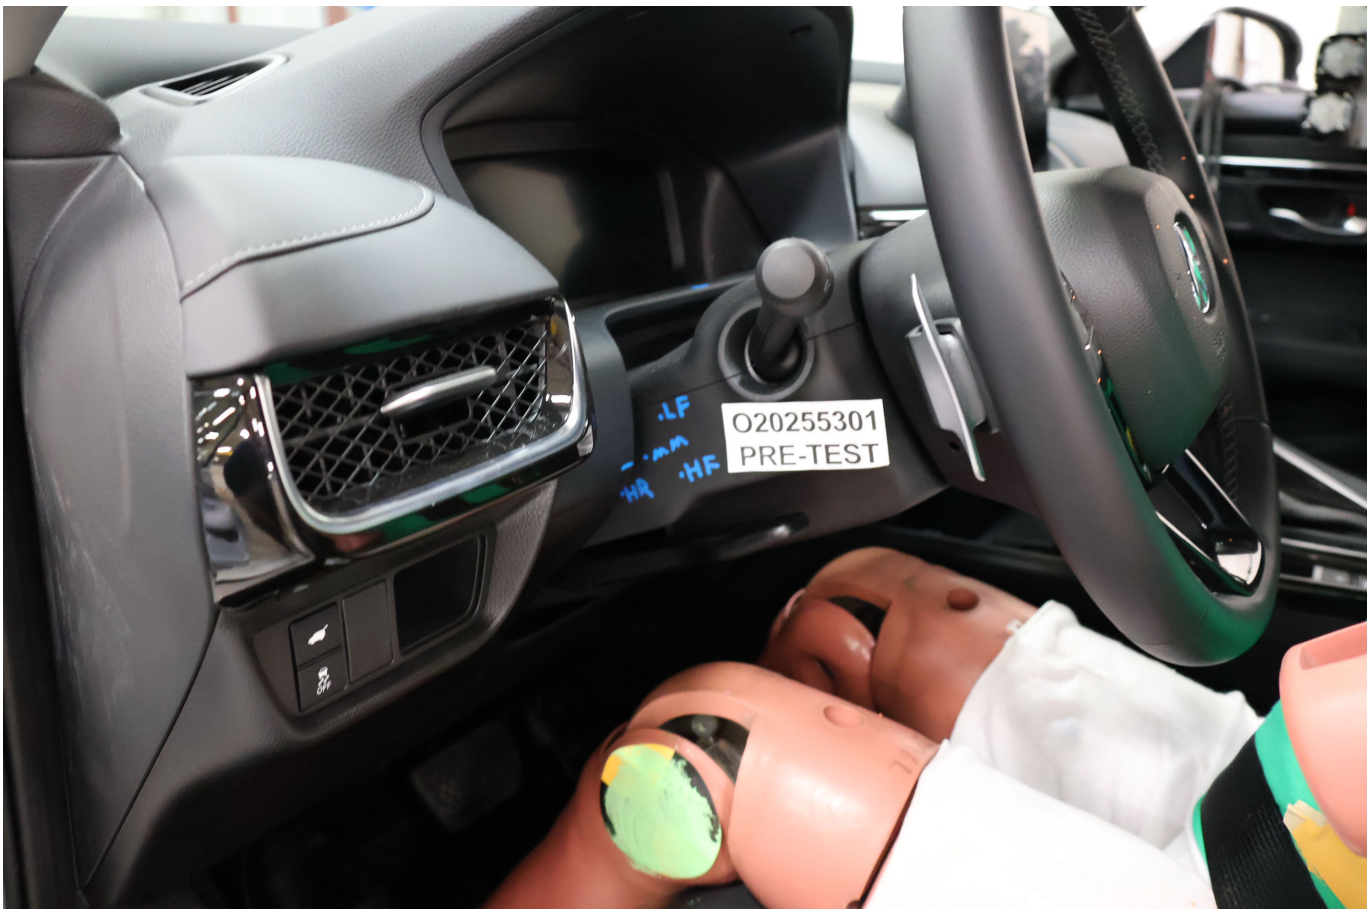


Photo No. 034 - Pre-Test Left Side View of Steering Wheel



Photo No. 035 - Pre-Test View of Disengaged Parking Brake



Photo No. 036 - Pre-Test View of Parking Brake



Photo No. 037 - Pre-Test Close-Up Left Side View of Driver Seat Track



Photo No. 038 - Pre-Test Close-Up Left Side View of Driver Seat Back



Photo No. 039 - Pre-Test Close-Up View of Driver Seat Back or Head Restraint



Photo No. 040 - Pre-Test Dummy and Door Clearance View



Photo No. 041 - Post-Test Dummy and Door Clearance View



Photo No. 042 - Pre-Test Right Side View of Dummy and Front Seat of Occupant Compartment



Photo No. 043 - Post-Test Right Side View of Dummy and Front Seat of Occupant Compartment



Photo No. 044 - Pre-Test Inner Door Panel View



Photo No. 045 - Post-Test Inner Door Panel View Showing Dummy Contact Location



Photo No. 046 - Post-Test Dummy Close-Up Head Contact with Vehicle Interior View



Photo No. 047 - Post-Test Dummy Close-Up Head Contact with Side Air Bag View



Photo No. 048 - Post-Test Dummy Close-Up Torso Contact with Vehicle Interior View



Photo No. 049 - Post-Test Dummy Close-Up Torso Contact with Side Air Bag View



Photo No. 050 - Post-Test Dummy Close-Up Pelvis Contact with Vehicle Interior View



Photo No. 051 - Post-Test Dummy Close-Up Pelvis Contact with Side Air Bag View



Photo No. 052 - Post-Test Dummy Close-Up Knee Contact with Vehicle Interior View



Photo No. 053 - Post-Test Right Side View of Dummy and Rear Seat of Occupant Compartment



Photo No. 054 - Post-Test Inner Rear Passenger Torso Air Bag Deployment View



Photo No. 055 - Pre-Test View of Fuel Filler Cap or Fuel Filler Neck



Photo No. 056 - Post-Test View of Fuel Filler Cap or Fuel Filler Neck

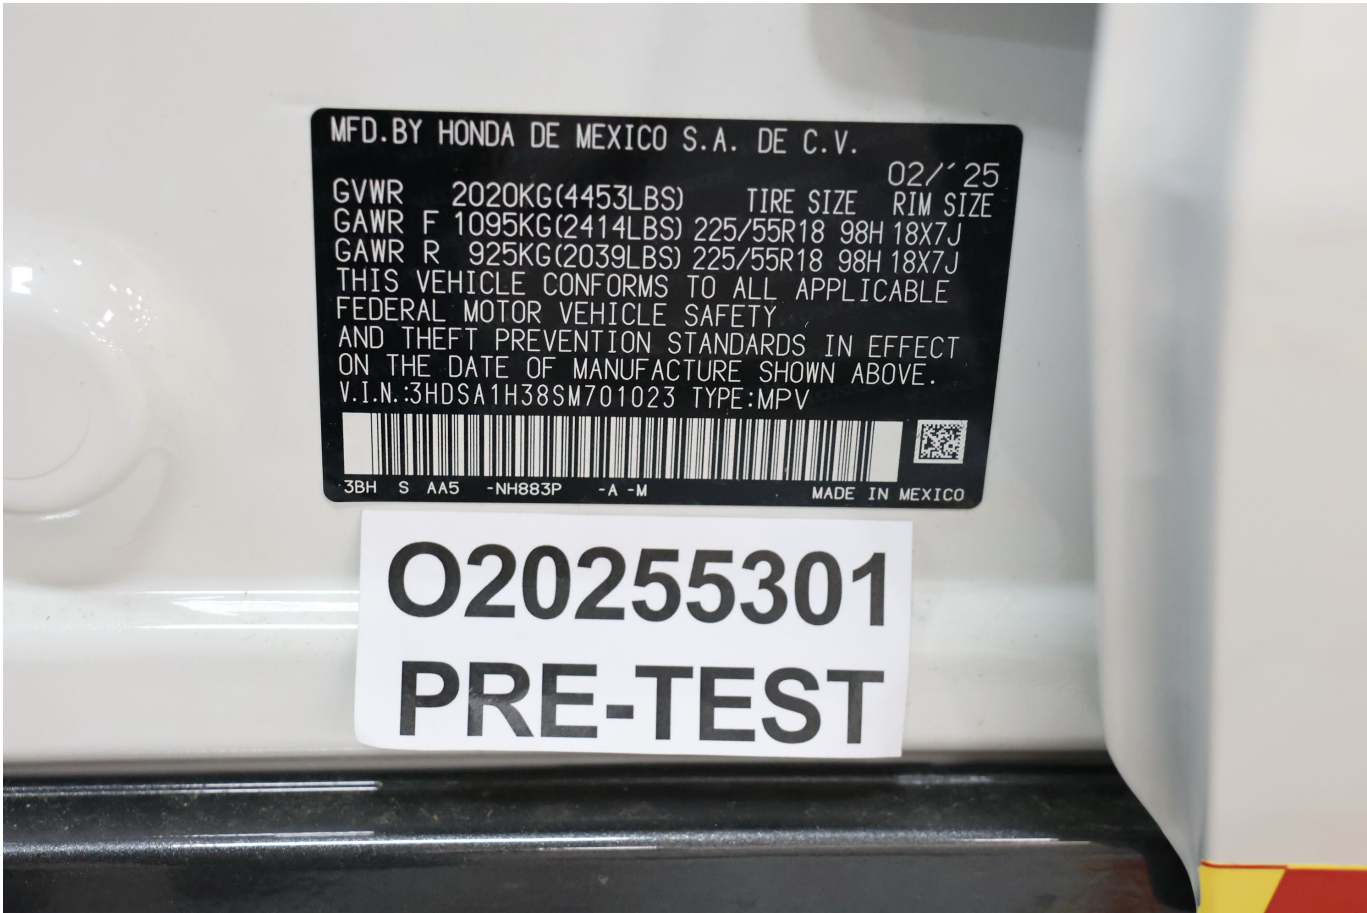


Photo No. 057 - Close-Up View of Vehicle's Certification Label



Photo No. 058 - Close-Up View of Vehicle's Tire Information Placard or Label



Photo No. 059 - Pre-Test Pole Barrier Front View



Photo No. 060 - Post-Test Pole Barrier Front View



Photo No. 061 - Pre-Test Pole Barrier Side View



Photo No. 062 - Post-Test Pole Barrier Side View

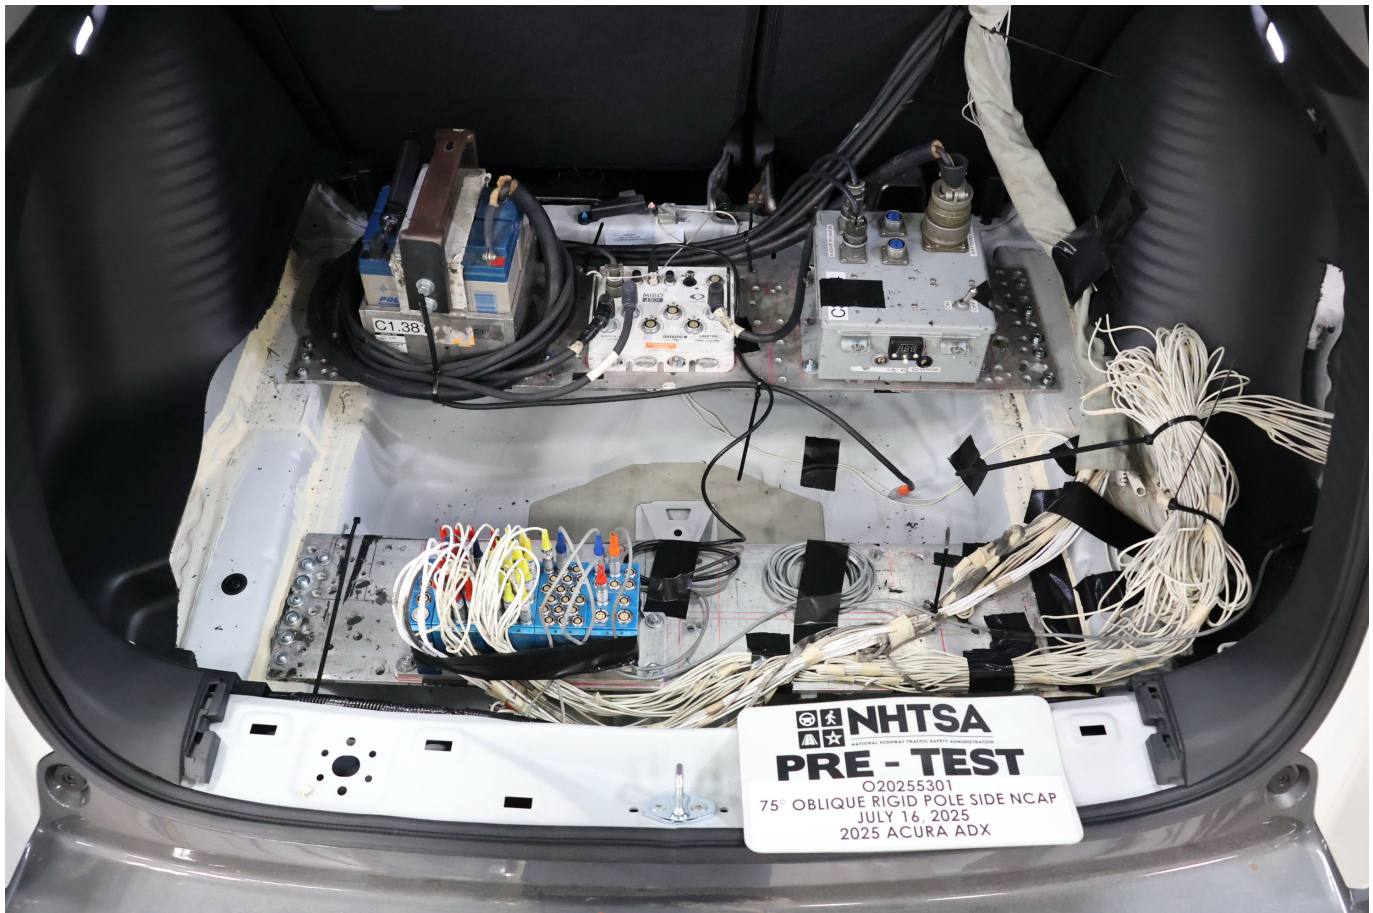


Photo No. 063 - Pre-Test Ballast View



Photo No. 064 - Post-Test Primary and Redundant Speed Trap Read-Out



Photo No. 065 - FMVSS Photo No. 301 Static Rollover 0 Degrees

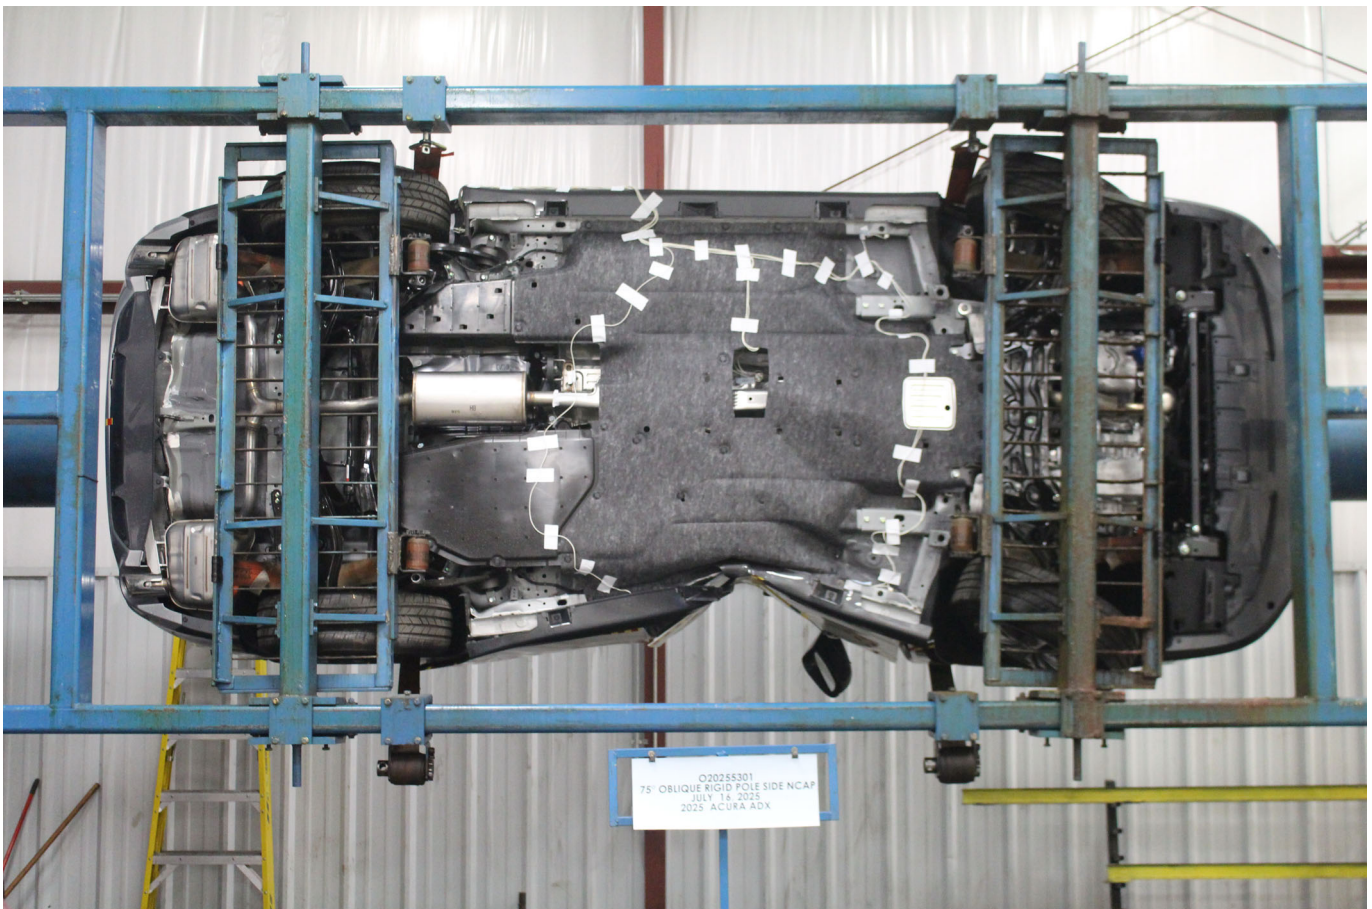


Photo No. 066 - FMVSS Photo No. 301 Static Rollover 90 Degrees



Photo No. 067 - FMVSS Photo No. 301 Static Rollover 180 Degrees



Photo No. 068 - FMVSS Photo No. 301 Static Rollover 270 Degrees



Photo No. 069 - FMVSS Photo No. 301 Static Rollover 360 Degrees



Photo No. 070 - Impact Event



Photo No. 073 - Post-Test View of Shattered Vehicle Inner Door Panel

APPENDIX B

DUMMY RESPONSE DATA PLOTS

TABLE OF DATA PLOTS
Driver Dummy Instrumentation Plots

		<u>Page No.</u>
Figure No. 1.	Driver Head CG Acceleration (X) vs. Time	B-1
Figure No. 2.	Driver Head CG Acceleration (Y) vs. Time	B-1
Figure No. 3.	Driver Head CG Acceleration (Z) vs. Time	B-1
Figure No. 4.	Driver Head CG Resultant Acceleration (X) vs. Time	B-1
Figure No. 5.	Driver Lower Spine T12 Acceleration (X) vs. Time	B-2
Figure No. 6.	Driver Lower Spine T12 Acceleration (Y) vs. Time	B-2
Figure No. 7.	Driver Lower Spine T12 Acceleration (Z) vs. Time	B-2
Figure No. 8.	Driver Lower Spine T12 Resultant Acceleration vs. Time	B-2
Figure No. 9.	Driver Iliac Wing Force on Impact Side (Y) vs. Time	B-3
Figure No. 10.	Driver Acetabulum Force on Impact Side (Y) vs. Time	B-3
Figure No. 11.	Driver Total Pelvis Force on Impact Side (Y) vs. Time	B-3

The following additional data for this test can be obtained from the Research and Development section of the NHTSA website. The website can be found at www.nhtsa.gov

Additional Driver Dummy Instrumentation Data

Driver Head CG Redundant Acceleration (X) vs. Time
Driver Head CG Redundant Acceleration (Y) vs. Time
Driver Head CG Redundant Acceleration (Z) vs. Time
Driver Head Angular Velocity X (Deg/Sec) vs. Time
Driver Head Angular Velocity Y (Deg/Sec) vs. Time
Driver Head Angular Velocity Z (Deg/Sec) vs. Time
Driver Upper Thorax Rib Deflection (Y)
Driver Middle Thorax Rib Deflection (Y)
Driver Lower Thorax Rib Deflection (Y)
Driver Upper Abdomen Rib Deflection (Y)
Driver Lower Abdomen Rib Deflection (Y)

Vehicle Instrumentation Data

Vehicle Center of Gravity Acceleration (X)

Vehicle Center of Gravity Acceleration (Y)

Vehicle Center of Gravity Acceleration (Z)

Left Floor Sill Acceleration (Y)

Left A-Pillar Sill Acceleration (Y)

Left Lower A-Pillar Acceleration (Y)

Left Mid A-Pillar Acceleration (Y)

Left B-Pillar Sill Acceleration (Y)

Left Lower B-Pillar Acceleration (Y)

Left Mid B-Pillar Acceleration (Y)

Driver Seat Track at Dummy Hip Point Acceleration (Y)

Engine Top Acceleration (X)

Engine Top Acceleration (Y)

Firewall Center Acceleration (Y)

Right Roof at Vertical Impact Reference Line Acceleration (Y)

Right Sill at Vertical Impact Reference Line Acceleration (Y)

Rear Floorpan Behind Rear Axle at Centerline Acceleration (X)

Rear Floorpan Behind Rear Axle at Centerline Acceleration (Y)

Pole Instrumentation Data

Load Cell Pole Barrier #1 Force (Y)

Load Cell Pole Barrier #2 Force (Y)

Load Cell Pole Barrier #3 Force (Y)

Load Cell Pole Barrier #4 Force (Y)


Load Cell Pole Barrier #5 Force (Y)

Load Cell Pole Barrier #6 Force (Y)


Load Cell Pole Barrier #7 Force (Y)

Load Cell Pole Barrier #8 Force (Y)


DRIVER HEAD X (g) vs Time (ms)

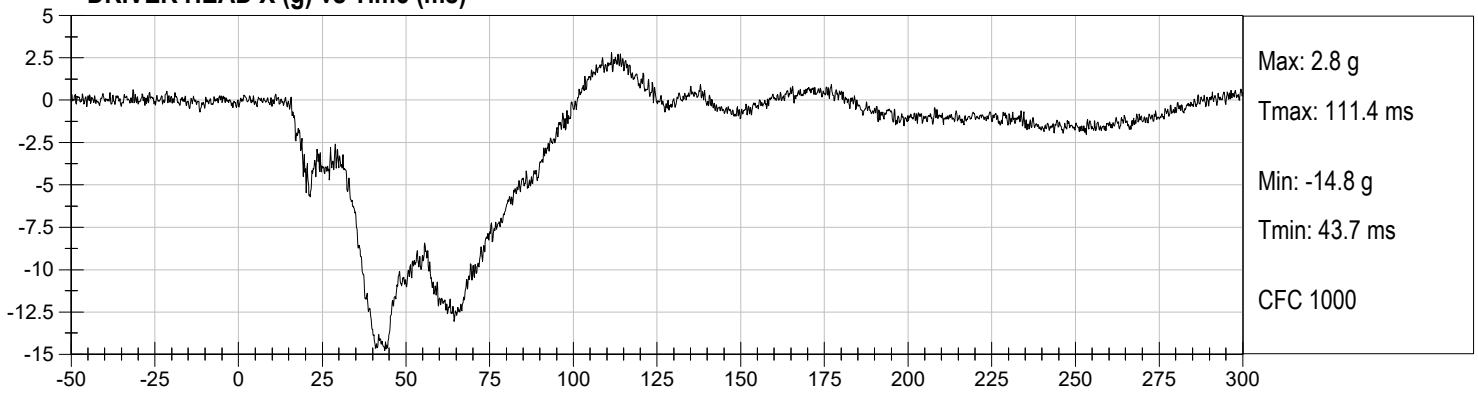


DRIVER HEAD Y (g) vs Time (ms)

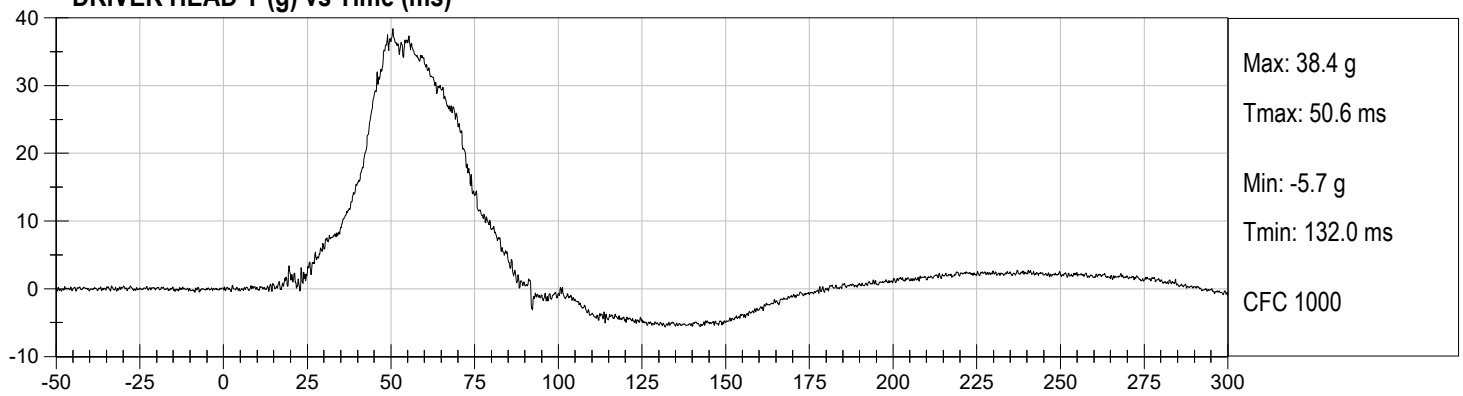


DRIVER HEAD Z (g) vs Time (ms)

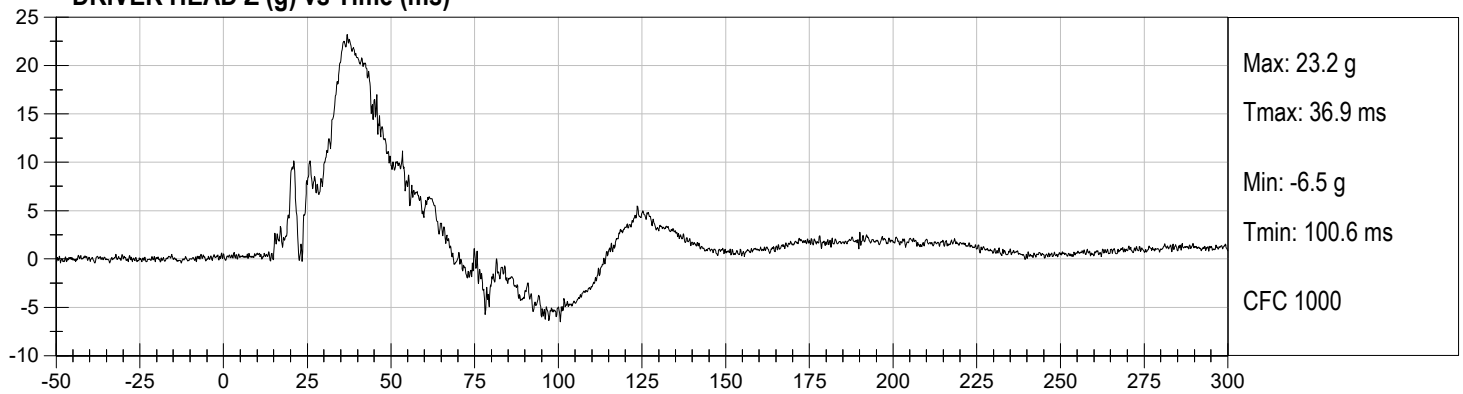


DRIVER HEAD Resultant (g) vs Time (ms)

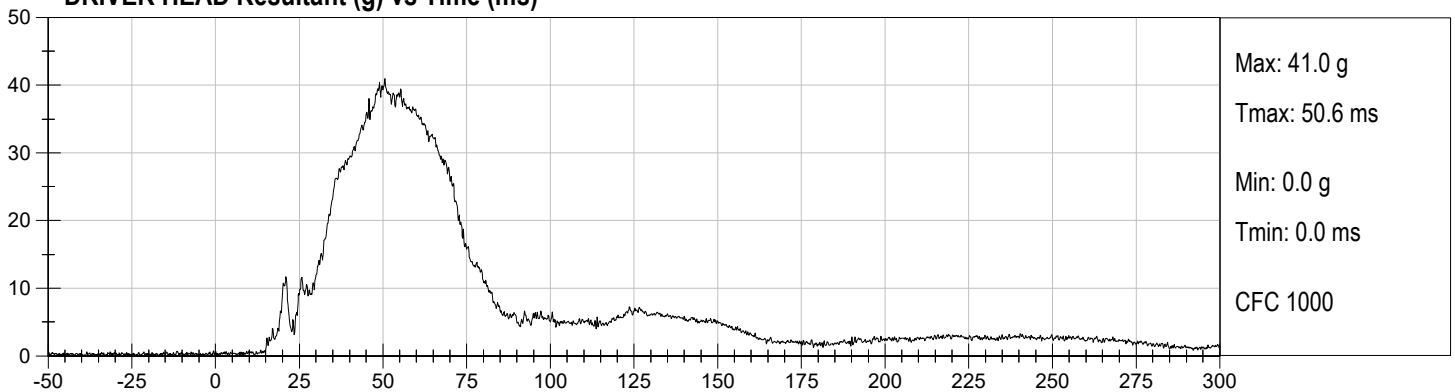


DRIVER LOWER SPINE X (g) vs Time (ms)

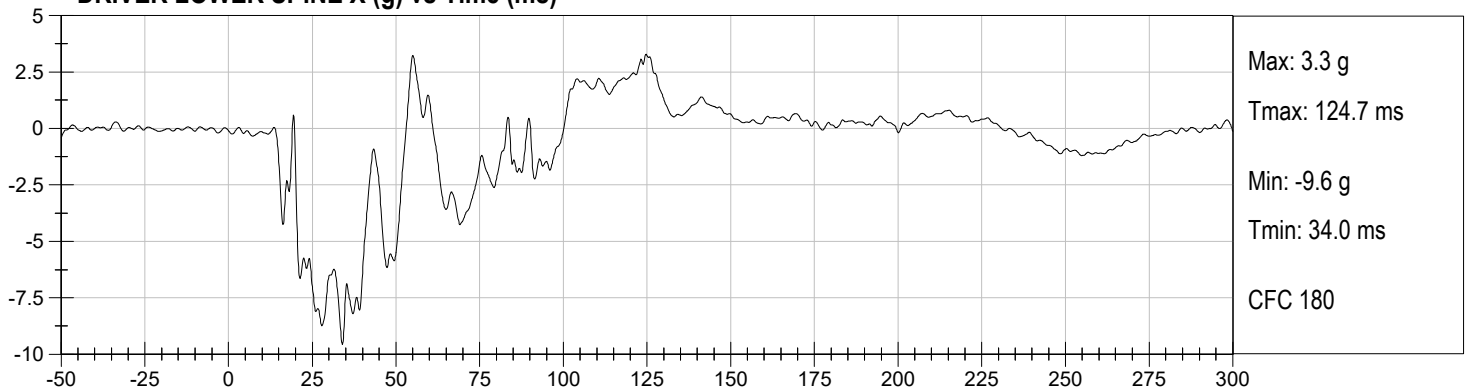

DRIVER LOWER SPINE Y (g) vs Time (ms)

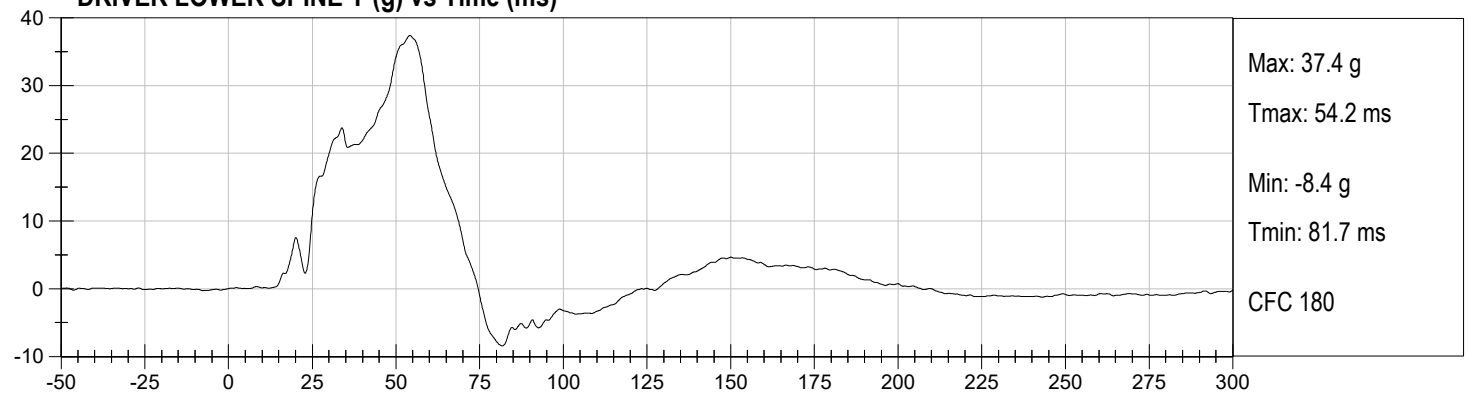


DRIVER LOWER SPINE Z (g) vs Time (ms)

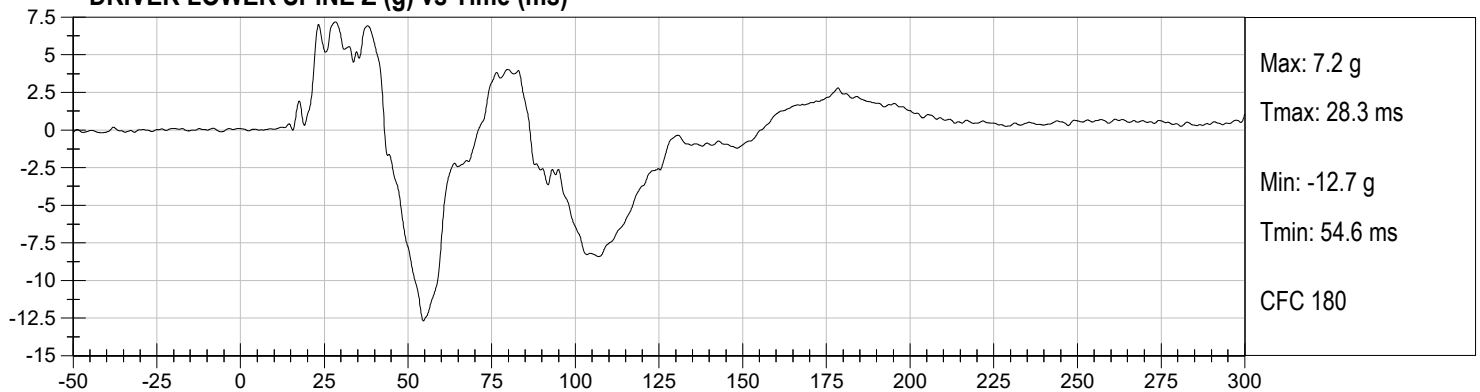


DRIVER LOWER SPINE Resultant (g) vs Time (ms)




DRIVER LEFT ILIUM CREST FY (N) vs Time (ms)

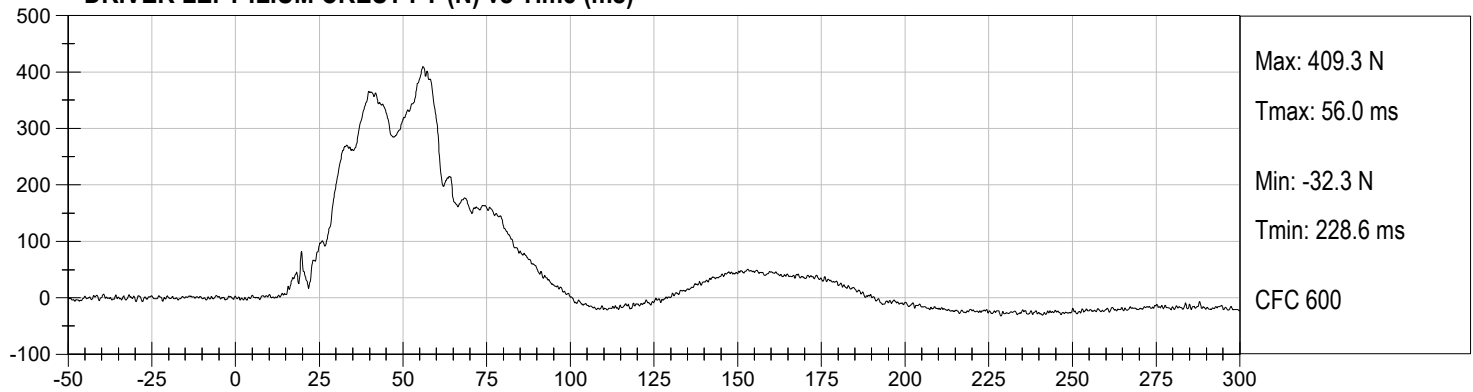

DRIVER LEFT ACETABULUM FY (N) vs Time (ms)

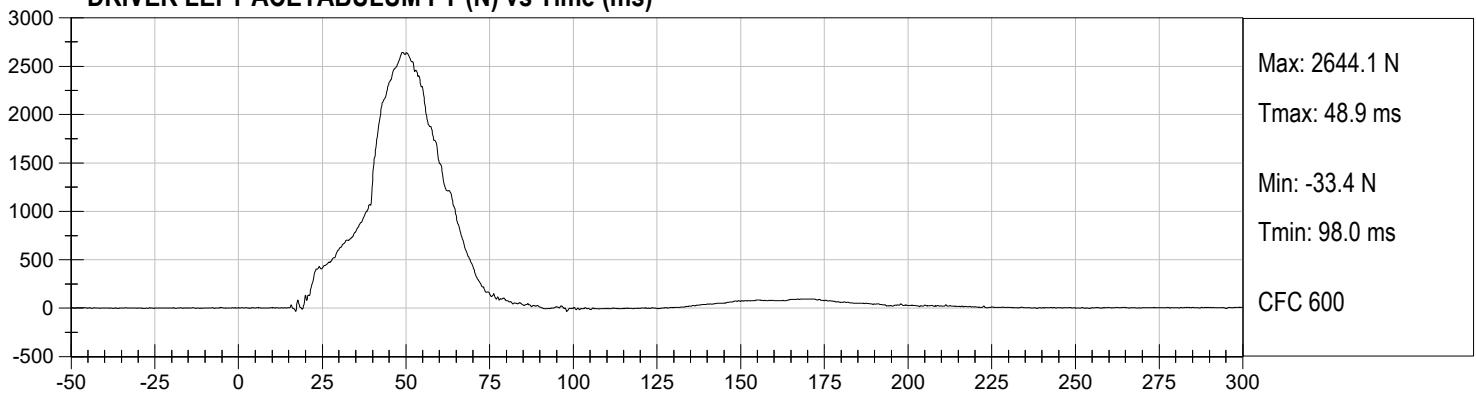

DRIVER LEFT LATERAL PELVIC FORCE (N) vs Time (ms)

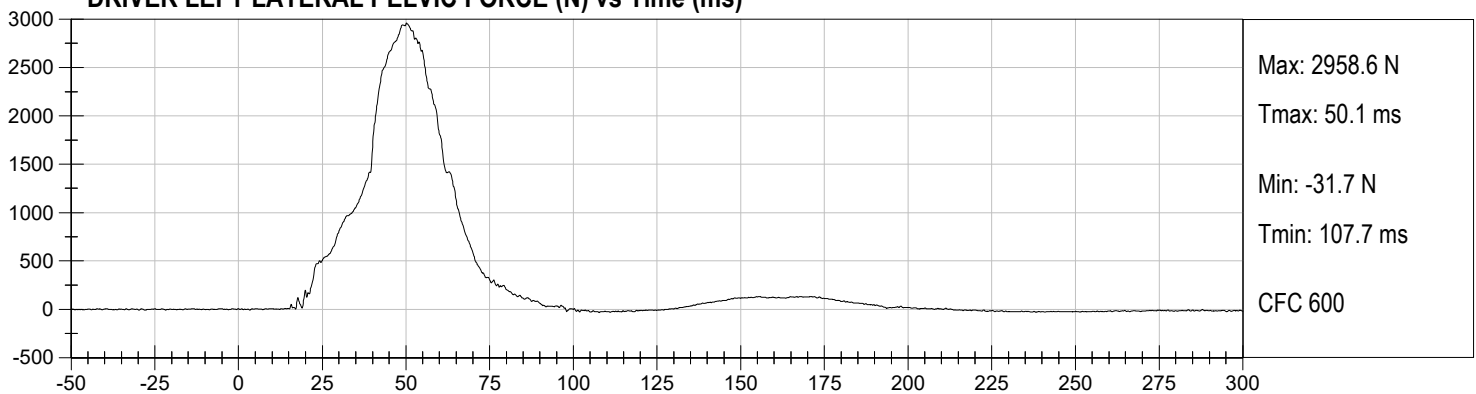

APPENDIX C
DUMMY QUALIFICATION AND PERFORMANCE VERIFICATION

QUALIFICATION TEST RESULTS

PRE-TEST





SID-IIS 5TH PERCENTILE FEMALE - DRIVER ATD

SID-IIsD External Measurements
SN: 296

No.	Name	Spec. (mm)	Result	Pass/Fail
A	Sitting Height	772 - 788	784	Pass
B	Shoulder Pivot Height	437 - 453	442	Pass
C	H-point Height	79 - 89	83	Pass
D	H-point from Seatback	141 - 151	145	Pass
E	Shoulder Pivot from Backline	97 - 107	99	Pass
F	Thigh Clearance	119 -135	121	Pass
G	Head Breadth	140 - 148	142	Pass
H	Head Back from Backline	40 - 46	45	Pass
I	Head Depth	178 - 188	180	Pass
J	Head Circumference	541 - 551	548	Pass
K	Buttock to Knee Length	514 - 540	535	Pass
L	Popliteal Height	343 - 369	358	Pass
M	Knee Pivot to Floor Height	392 - 409	404	Pass
N	Buttock Popliteal Length	416 - 442	435	Pass
O	Chest Depth w/o Jacket	195 - 211	206	Pass
P	Foot Length	216 - 232	219	Pass
Q	Hip Breadth (w/ pelvic plugs)	313 - 323	316	Pass
R	Arm Length	249 - 259	250	Pass
S	Knee Joint to Seatback	477 - 493	481	Pass
V	Shoulder Width	341 - 357	346	Pass
W	Foot Width	78 - 94	85	Pass
Y	Chest Circumference w/ jacket	851 - 881	870	Pass
Z	Waist Circumference	761 - 791	772	Pass

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.6	Pass
Laboratory Relative Humidity	%	10 to 70	41	Pass
Peak Resultant Acceleration	g	115 to 137	127	Pass
Peak Longitudinal Acceleration	g	-15.0 to 15.0	-5.4	Pass
Unimodal	%	within 15% of peak	1	Pass


Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
HEAD Y	Endevco	T30974	11/25/2024	5/27/2025
HEAD X	Endevco	T30975	11/25/2024	5/27/2025
HEAD Z	Endevco	T30976	11/25/2024	5/27/2025

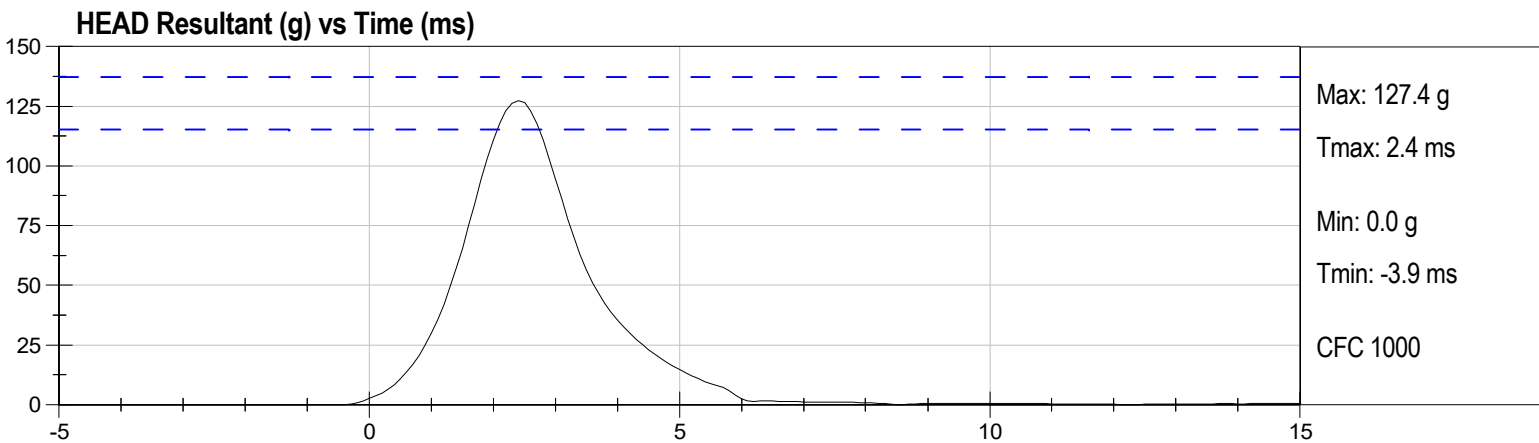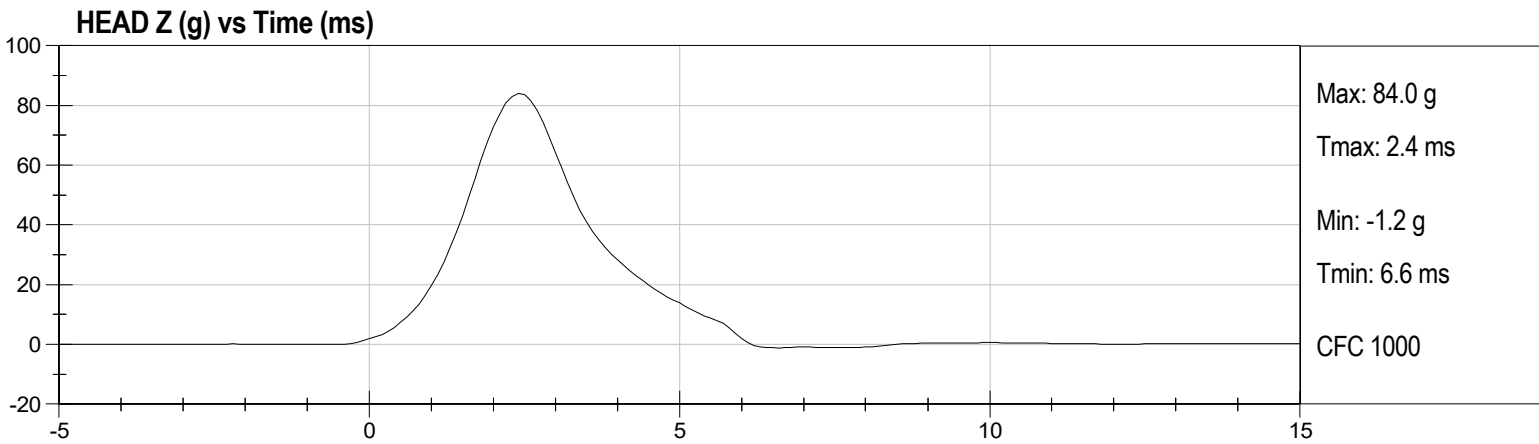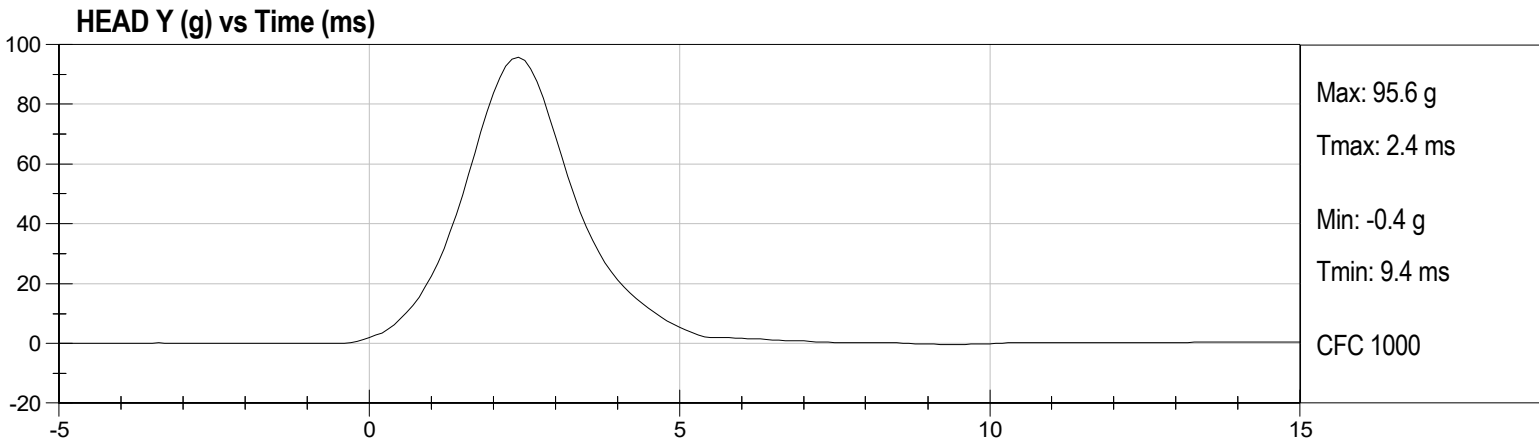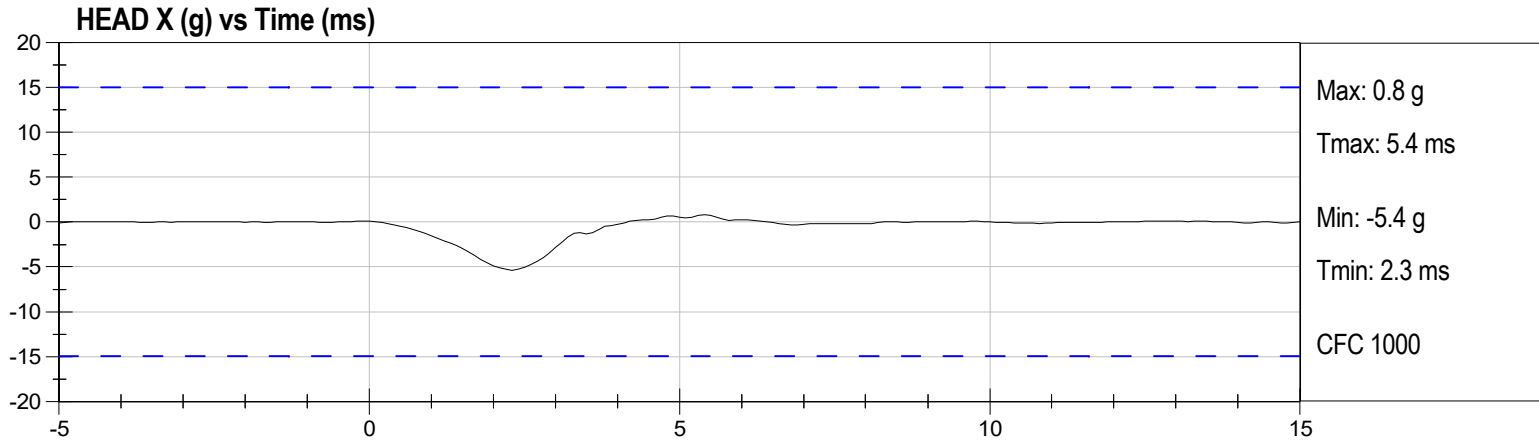


Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.7	Pass
Laboratory Relative Humidity	%	10 to 70	41	Pass
Impact Velocity	m/s	5.51 to 5.63	5.59	Pass
Pendulum Velocity at 10 ms	m/s	2.20 to 2.80	2.39	Pass
Pendulum Velocity at 15 ms	m/s	3.30 to 4.10	3.53	Pass
Pendulum Velocity at 20 ms	m/s	4.40 to 5.40	4.78	Pass
Pendulum Velocity at 25 ms	m/s	5.40 to 6.10	5.74	Pass
Peak Pendulum Velocity from 25 to 100 ms	m/s	5.50 to 6.20	5.79	Pass
Maximum "D" Plane Rotation	deg	71 to 81	72	Pass
Time of Maximum "D" Plane Rotation	ms	50 to 70	67	Pass
Maximum Moment About Occipital Condyle	Nm	-44 to -36	-36	Pass
Time of Moment Decay Time To 0 Nm	ms	102 to 126	119	Pass

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
PEND. ACCEL.	Endevco	AH5P1	01/13/2025	7/15/2025
NECK FORCE Y	Denton	N1021FY	02/19/2025	2/19/2026
NECK MOMENT X	Denton	N1021MX	02/19/2025	2/19/2026
POT. A - FRONT	Servo	2732	01/09/2025	7/11/2025
POT. C - HEADFORM	Servo	2204	01/09/2025	7/11/2025


PEND. ACCEL. Velocity (m/s) vs Time (ms)

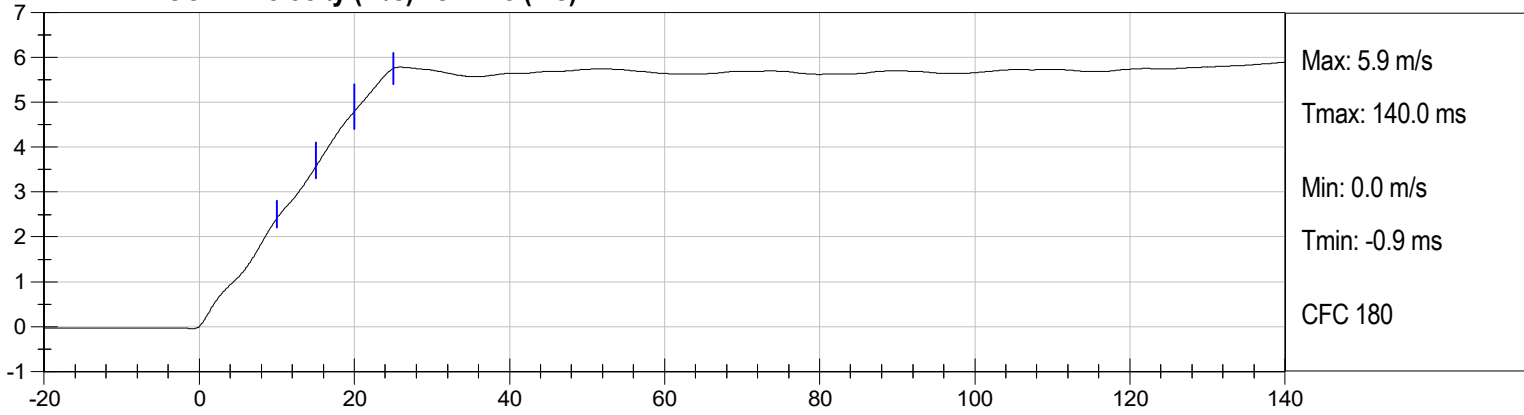

FLEXION ANGLE (deg) vs Time (ms)

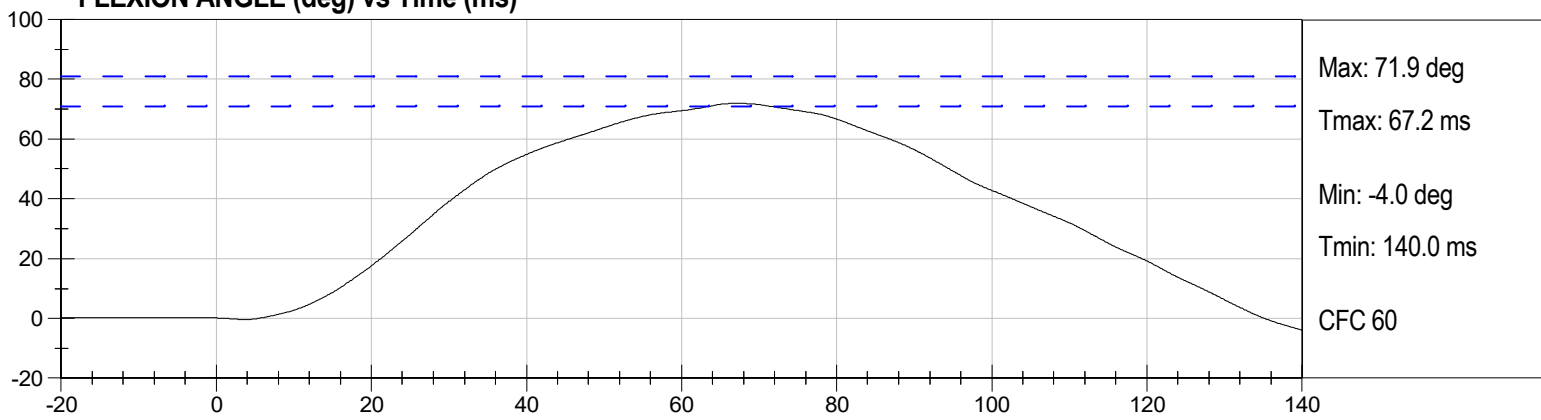

OCCIPITAL MOMENT (Nm) vs Time (ms)

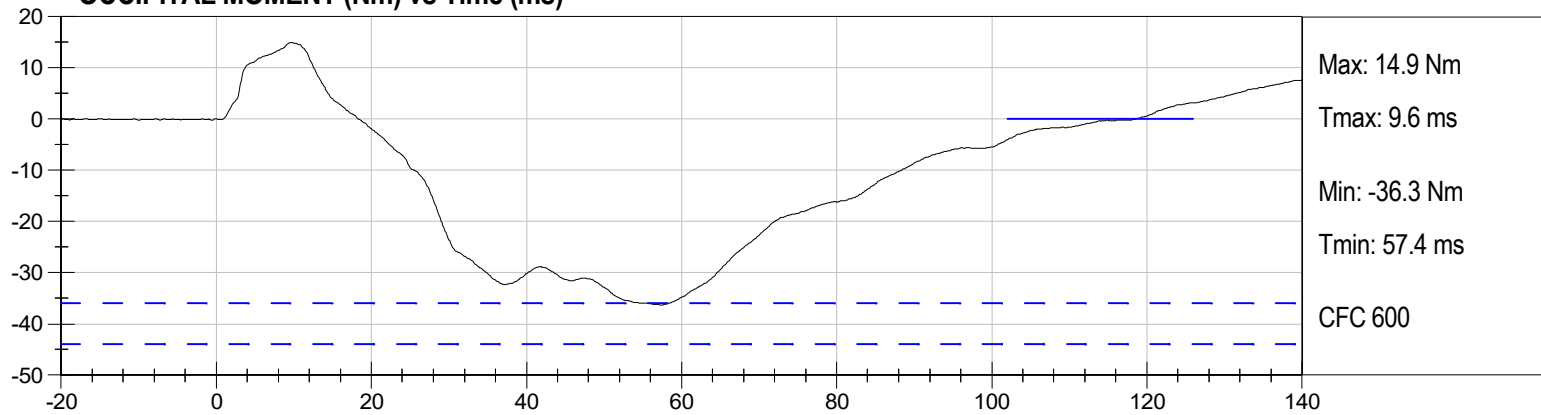






Shoulder Impact Test
SID IIs
ATD Serial No: 296

Test Date: 04/24/2025
Test ID: D251253
Test Technician: Jonah Pulokas




Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.6	Pass
Laboratory Relative Humidity	%	10 to 70	44	Pass
Impact Velocity	m/s	4.2 to 4.4	4.31	Pass
Peak Probe Acceleration	g	13 to 18	15	Pass
Shoulder Displacement	mm	28 to 37	30	Pass
Upper Spine (T1) Y Acceleration	g	17 to 22	19	Pass

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
PROBE	Endevco	P79577	03/21/2025	9/20/2025
UPPER SPINE Y	Endevco	P88675	12/12/2024	6/13/2025
SHOULDER DY	FTSS	G1223	12/12/2024	6/13/2025

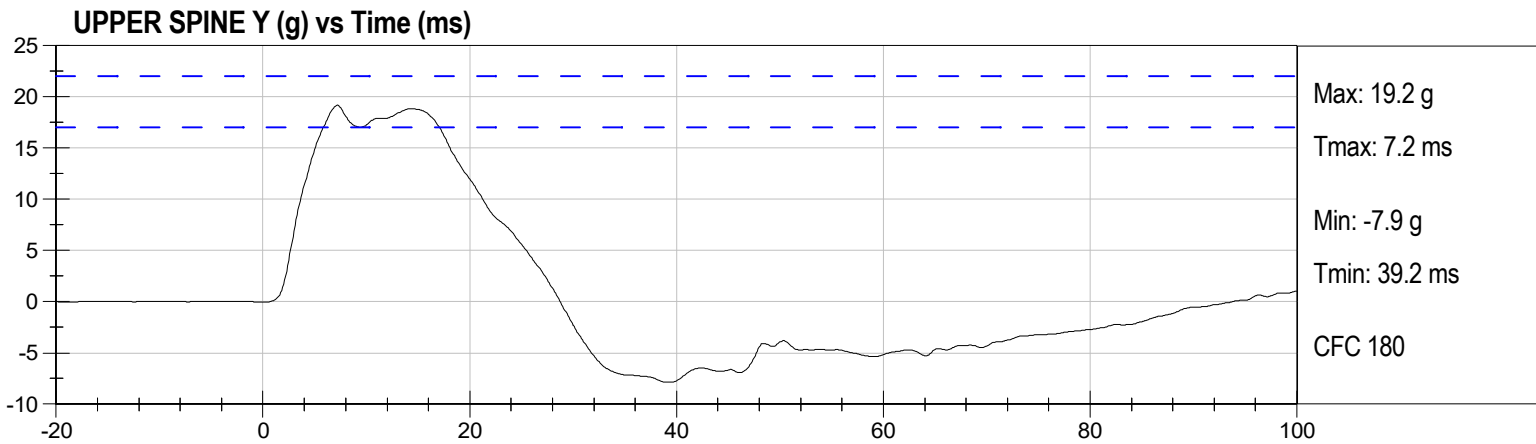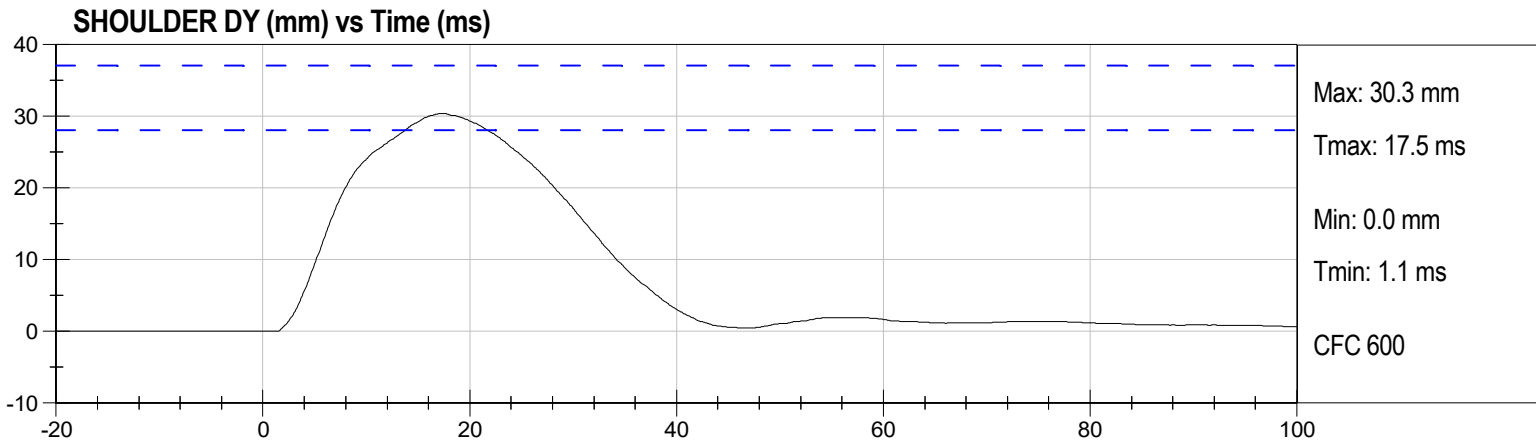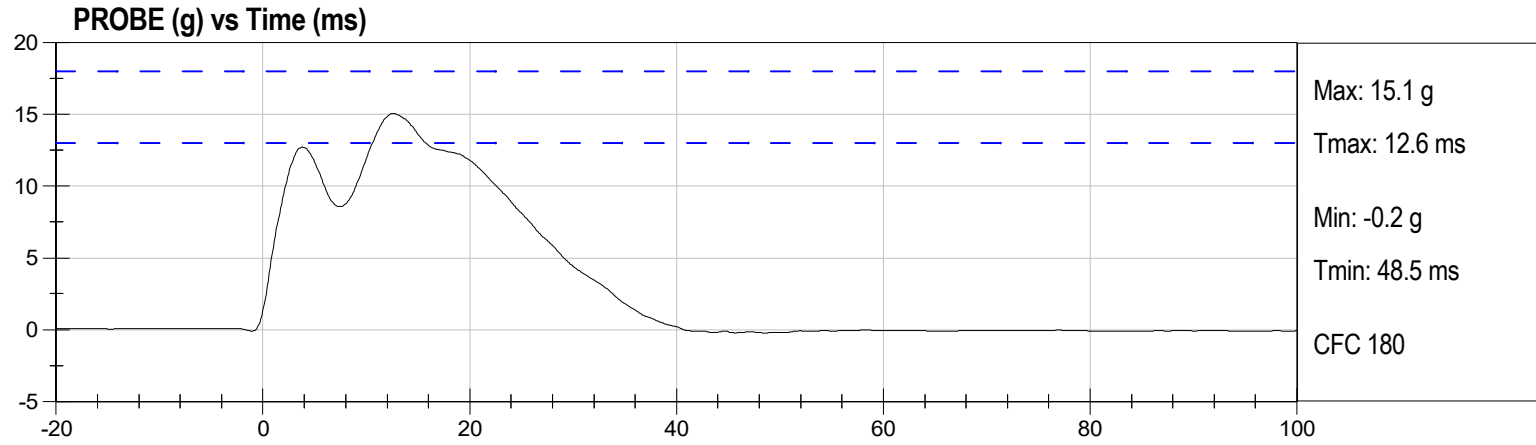


Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.6	Pass
Laboratory Relative Humidity	%	10 to 70	44	Pass
Impact Velocity	m/s	6.6 to 6.8	6.77	Pass
Peak Probe Acceleration after 5 ms	g	30 to 36	34	Pass
Upper Spine (T1) Y Acceleration	g	34 to 43	39	Pass
Lower Spine (T12) Y Acceleration	g	29 to 37	34	Pass
Shoulder Displacement	mm	31 to 40	35	Pass
Upper Thorax Rib Displacement	mm	25 to 32	28	Pass
Middle Thorax Rib Displacement	mm	30 to 36	32	Pass
Lower Thorax Rib Displacement	mm	32 to 38	34	Pass


Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
PROBE	Endevco	P79577	03/21/2025	9/20/2025
UPPER SPINE Y	Endevco	P88675	12/12/2024	6/13/2025
LOWER SPINE Y	Endevco	P79439	12/12/2024	6/13/2025
SHOULDER DY	FTSS	G1223	12/12/2024	6/13/2025
UPPER THORAX RIB DY	Servo	G012	12/12/2024	6/13/2025
MID THORAX RIB DY	FTSS	G1163	12/12/2024	6/13/2025
LOWER THORAX RIB DY	FTSS	G1158	12/12/2024	6/13/2025

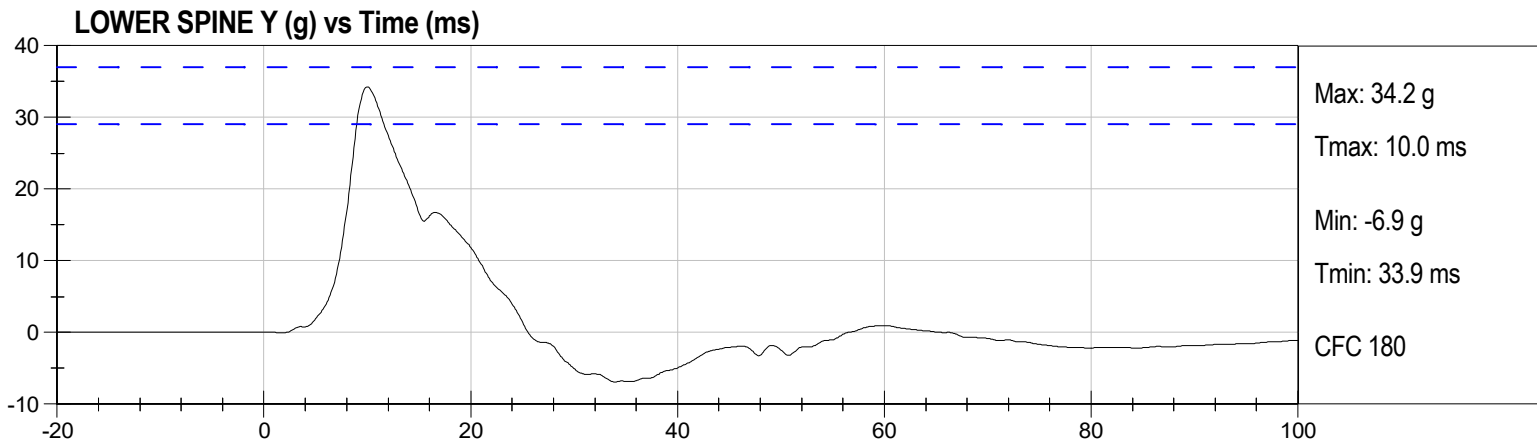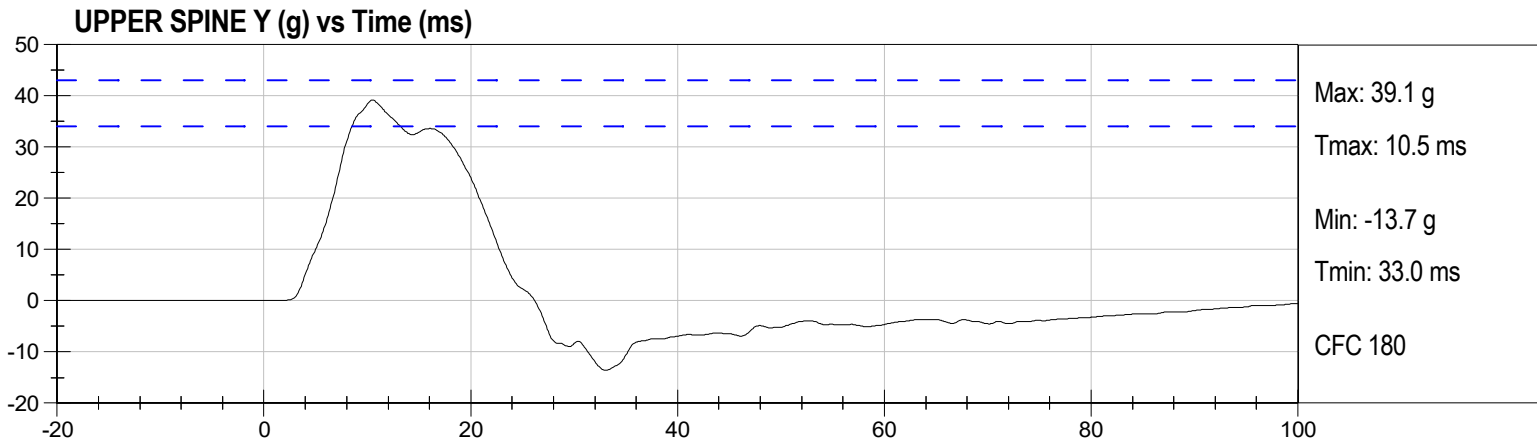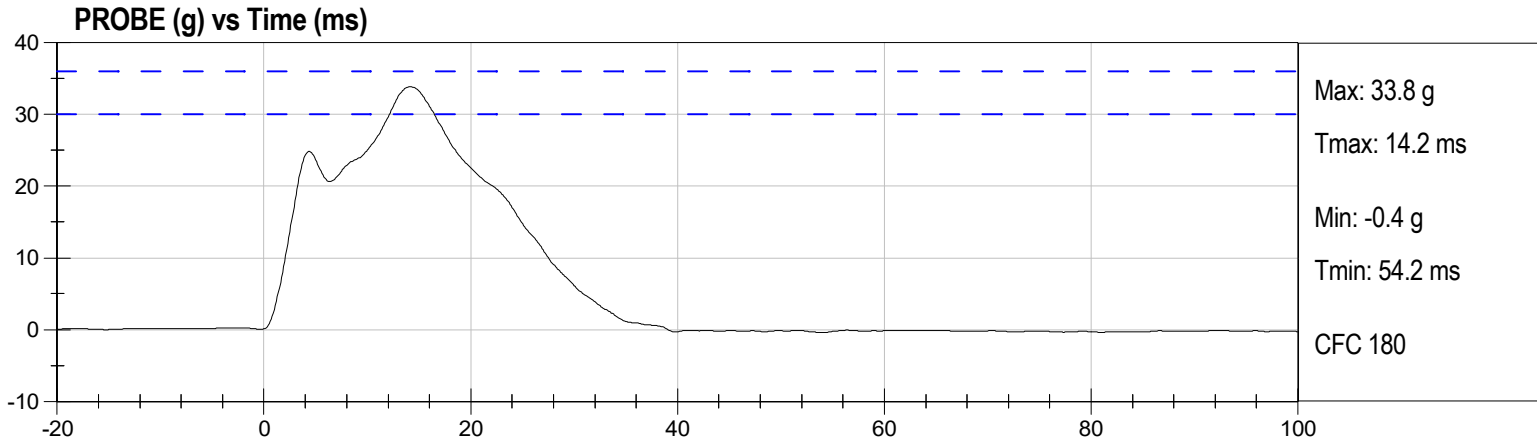


SHOULDER DY (mm) vs Time (ms)

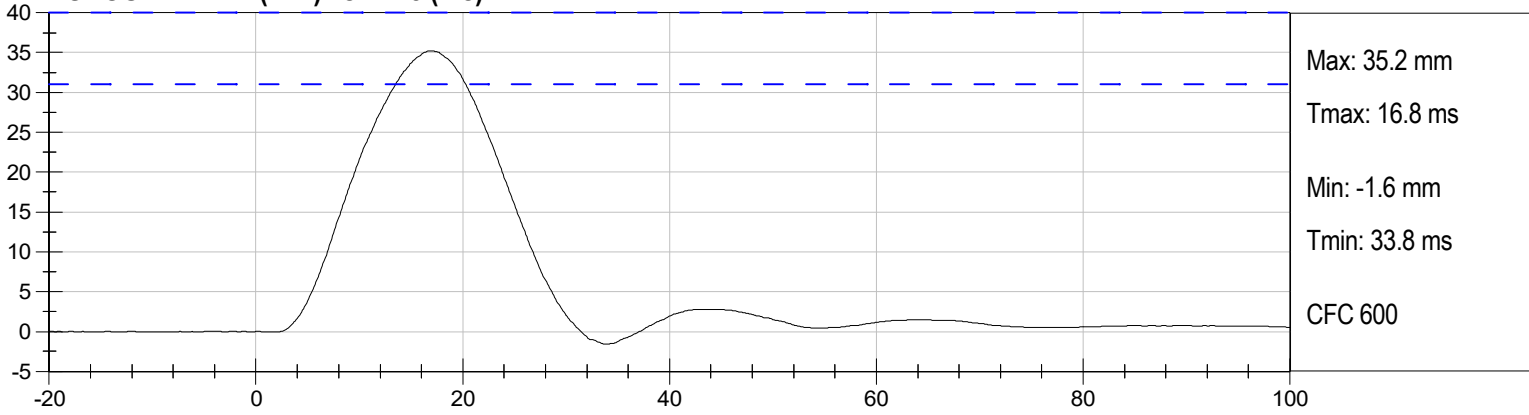


UPPER THORAX RIB DY (mm) vs Time (ms)

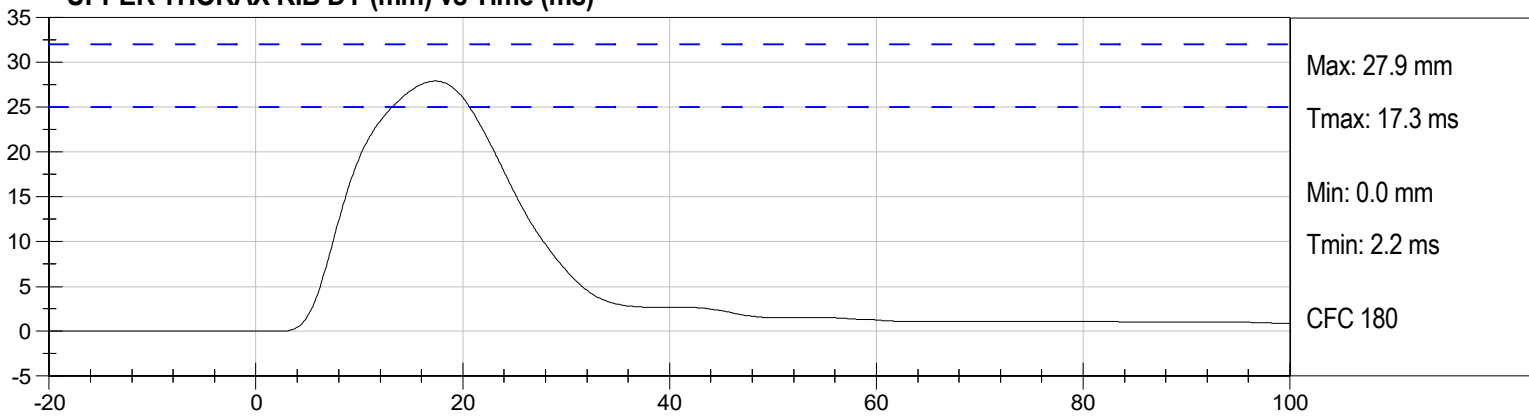

MID THORAX RIB DY (mm) vs Time (ms)



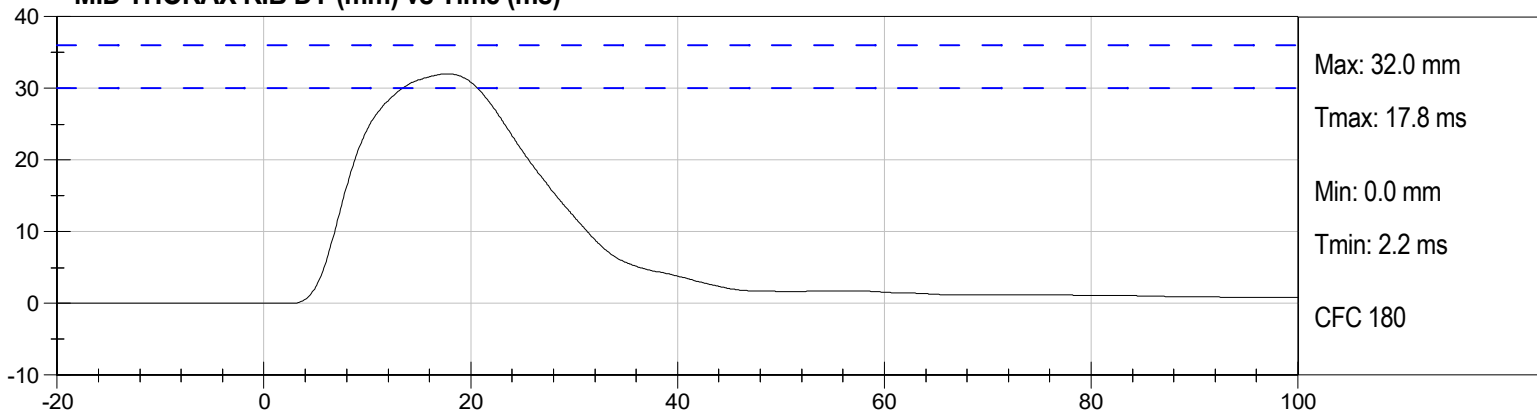


LOWER THORAX RIB DY (mm) vs Time (ms)

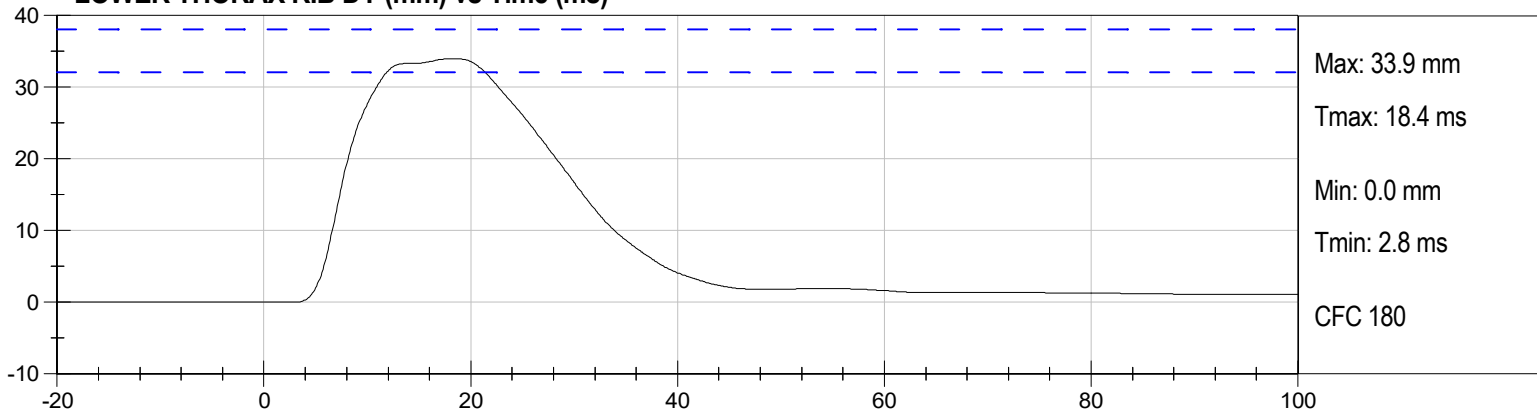


Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.7	Pass
Laboratory Relative Humidity	%	10 to 70	43	Pass
Impact Velocity	m/s	4.2 to 4.4	4.34	Pass
Peak Probe Acceleration	g	14 to 18	16	Pass
Upper Spine (T1) Y Acceleration	g	13 to 17	15	Pass
Lower Spine (T12) Y Acceleration	g	7 to 11	9	Pass
Upper Thorax Rib Displacement	mm	32 to 40	38	Pass
Middle Thorax Rib Displacement	mm	39 to 45	43	Pass
Lower Thorax Rib Displacement	mm	35 to 43	40	Pass


Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
PROBE	Endevco	P79577	03/21/2025	9/20/2025
UPPER SPINE Y	Endevco	P88675	12/12/2024	6/13/2025
LOWER SPINE Y	Endevco	P79439	12/12/2024	6/13/2025
UPPER THORAX RIB DY	Servo	G012	12/12/2024	6/13/2025
MID THORAX RIB DY	FTSS	G1163	12/12/2024	6/13/2025
LOWER THORAX RIB DY	FTSS	G1158	12/12/2024	6/13/2025

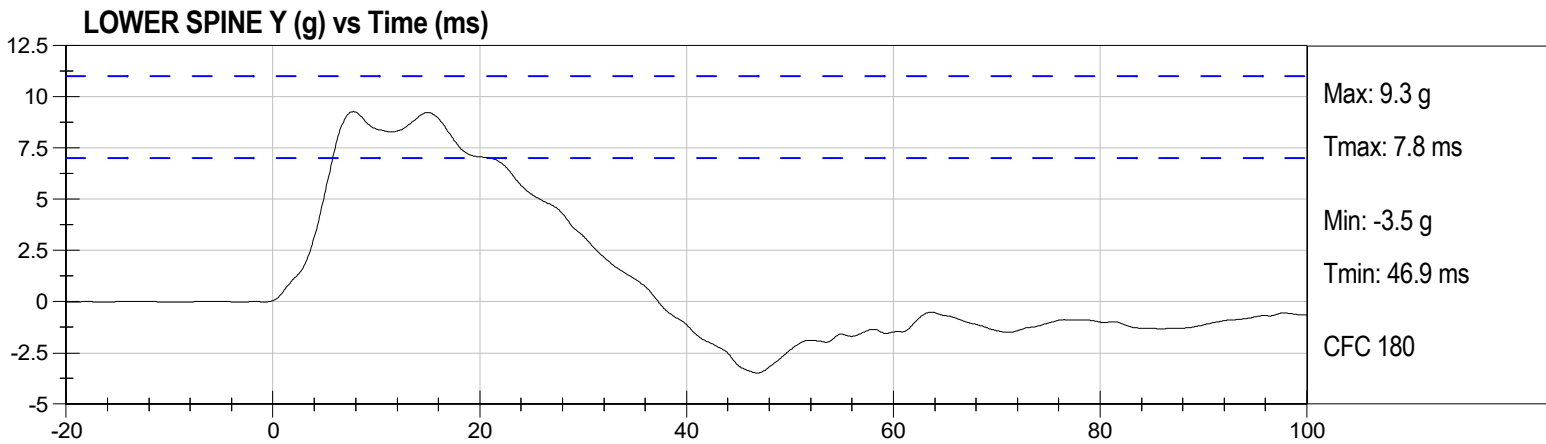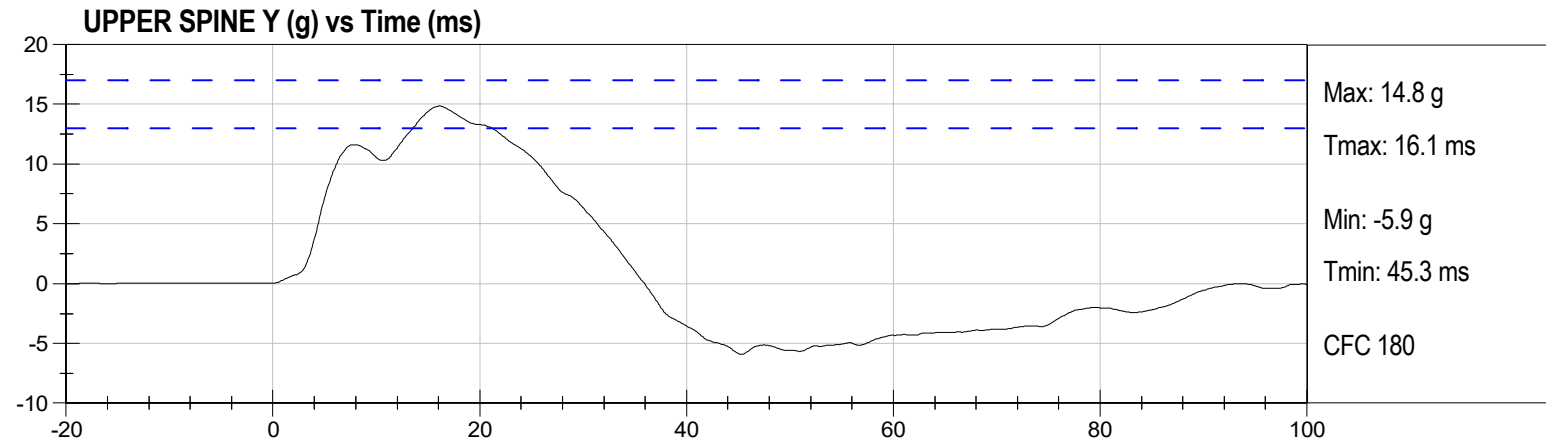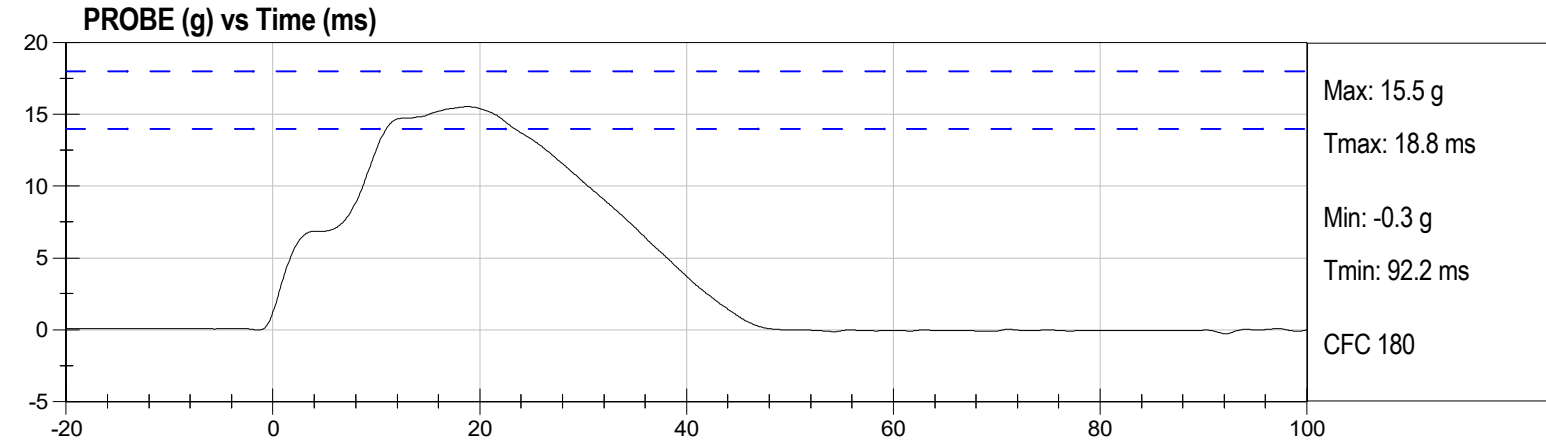


UPPER THORAX RIB DY (mm) vs Time (ms)

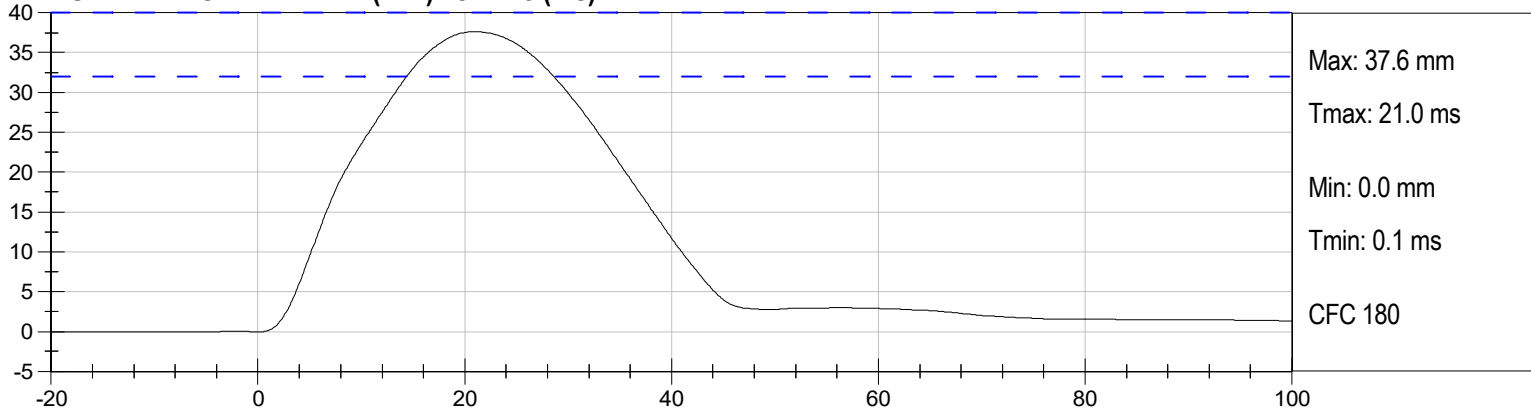

MID THORAX RIB DY (mm) vs Time (ms)

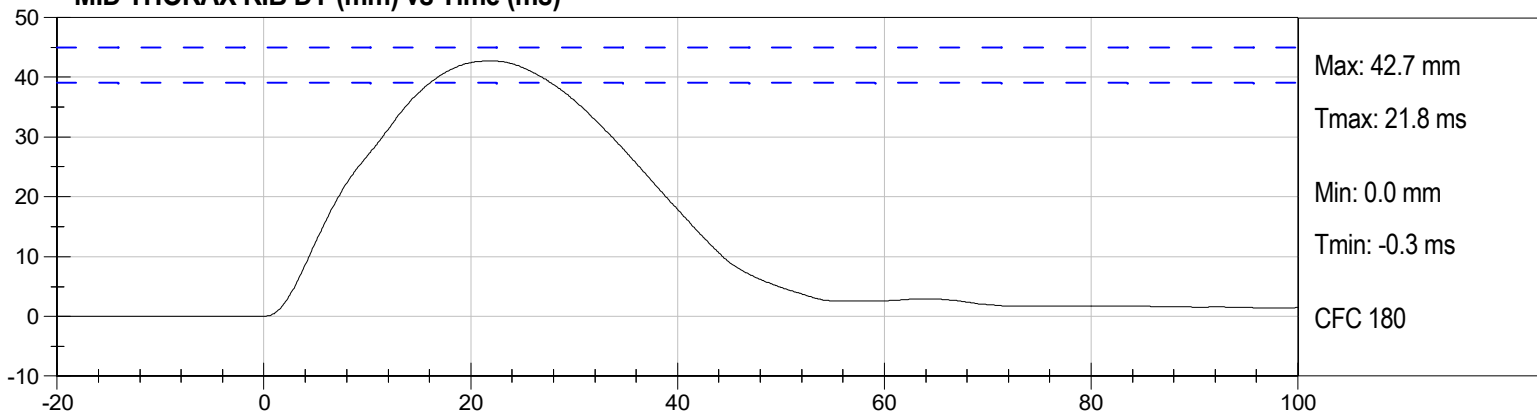


LOWER THORAX RIB DY (mm) vs Time (ms)

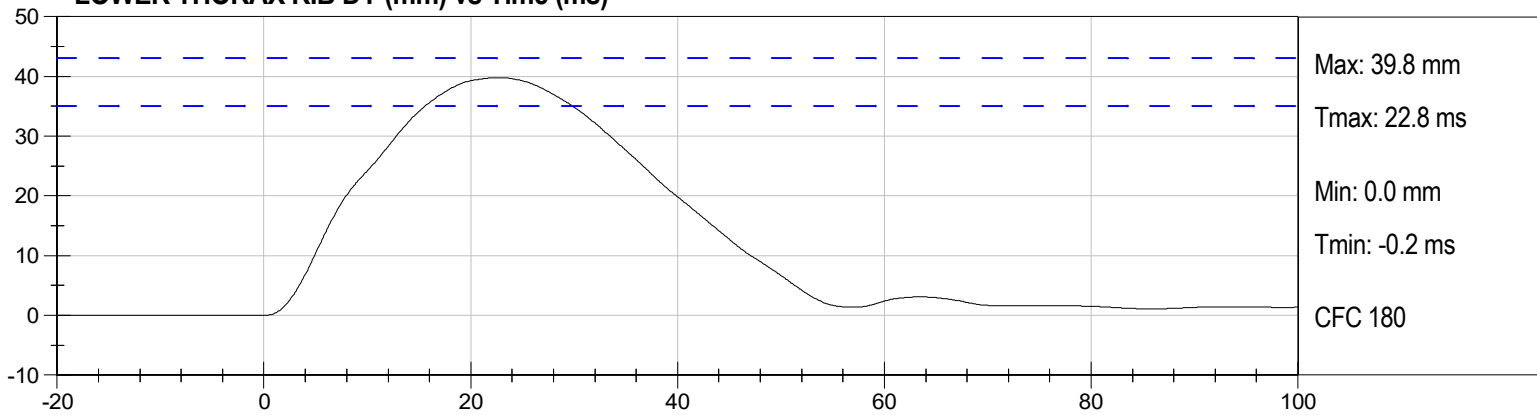


Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.7	Pass
Laboratory Relative Humidity	%	10 to 70	43	Pass
Impact Velocity	m/s	4.2 to 4.4	4.38	Pass
Peak Probe Acceleration	g	12 to 16	14	Pass
Lower Spine (T12) Y Acceleration	g	9 to 14	11	Pass
Upper Abdomen Rib Displacement	mm	36 to 47	43	Pass
Lower Abdomen Rib Displacement	mm	33 to 44	38	Pass

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
PROBE	Endevco	P79577	03/21/2025	9/20/2025
LOWER SPINE Y	Endevco	P79439	12/12/2024	6/13/2025
UPPER ABDOMINAL RIB DY	FTSS	G1146	12/12/2024	6/13/2025
LOWER ABDOMINAL RIB DY	FTSS	G1126	12/12/2024	6/13/2025


PROBE (g) vs Time (ms)

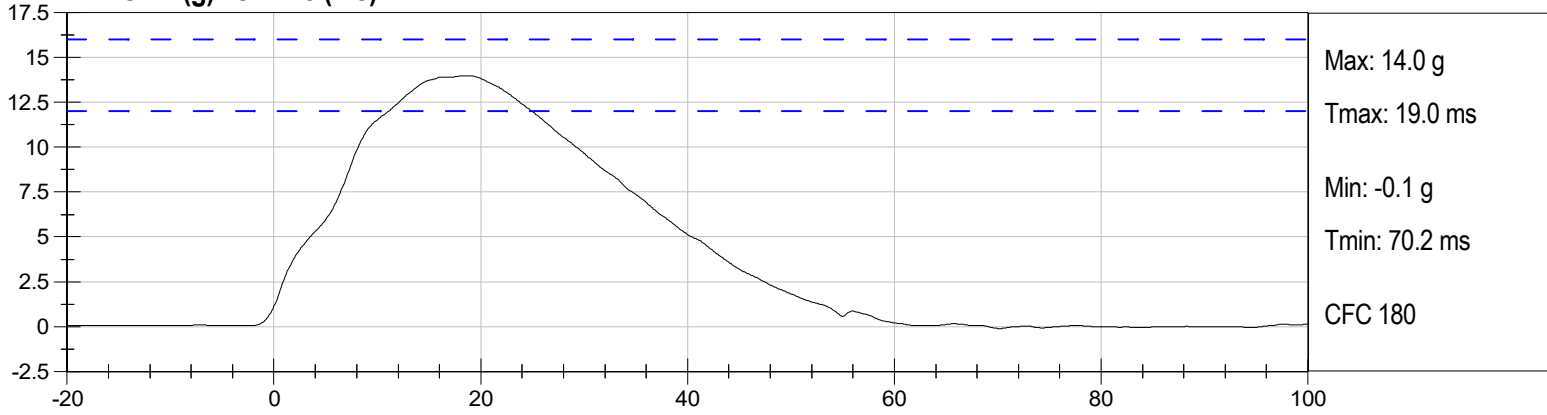


LOWER SPINE Y (g) vs Time (ms)

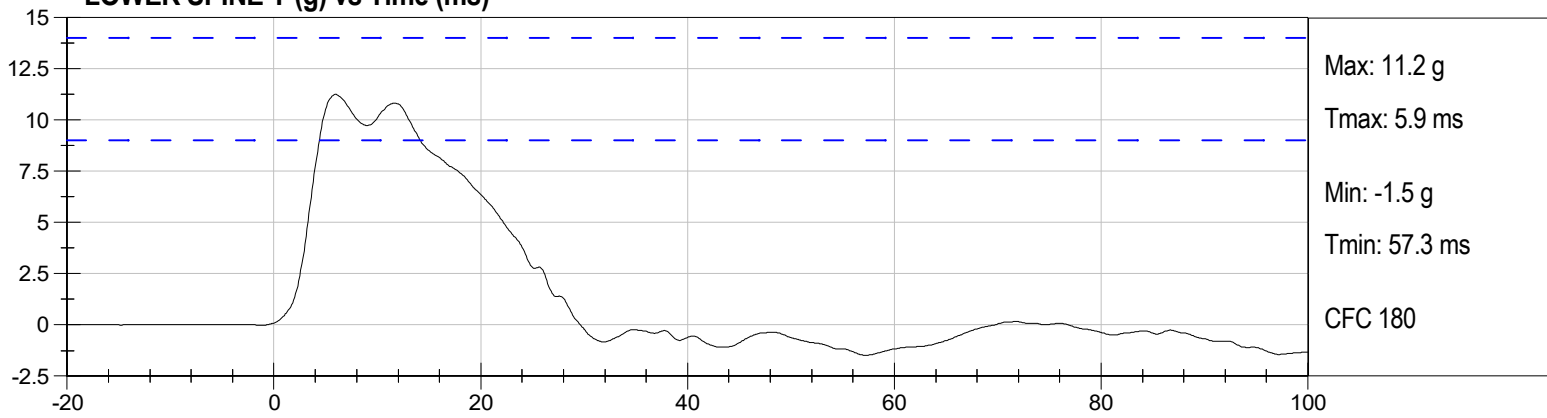

UPPER ABDOMINAL RIB DY (mm) vs Time (ms)

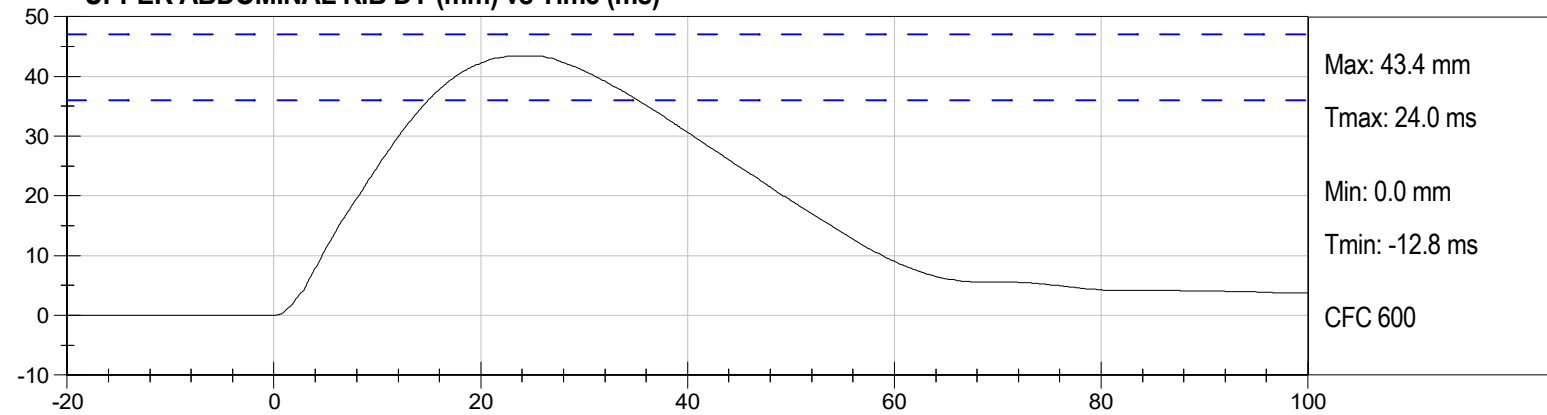


LOWER ABDOMINAL RIB DY (mm) vs Time (ms)

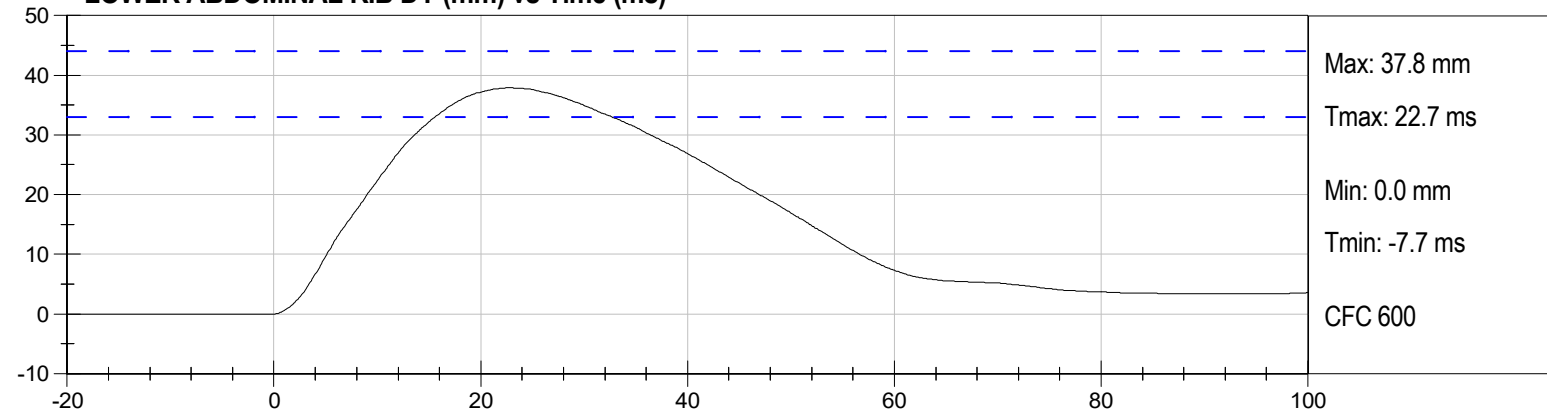


Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.7	Pass
Laboratory Relative Humidity	%	10 to 70	43	Pass
Impact Velocity	m/s	6.6 to 6.8	6.77	Pass
Peak Probe Acceleration	g	38 to 47	40	Pass
Peak Pelvis Y Acceleration after 6 ms	g	34 to 42	37.3	Pass
Acetabulum Force	N	3600 to 4300	3815	Pass

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
PROBE	Endevco	P79577	03/21/2025	9/20/2025
Pelvis Y	Endevco	T22504	12/13/2024	6/14/2025
ACETABULUM FY	Denton	ACG269FY	01/20/2025	1/20/2026


PROBE (g) vs Time (ms)

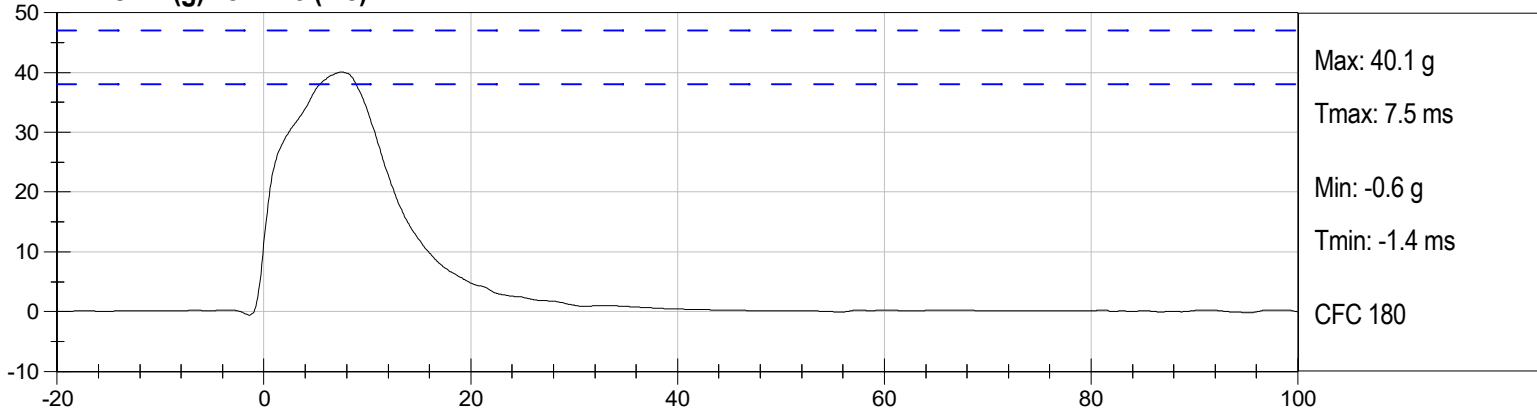

Pelvis Y (g) vs Time (ms)

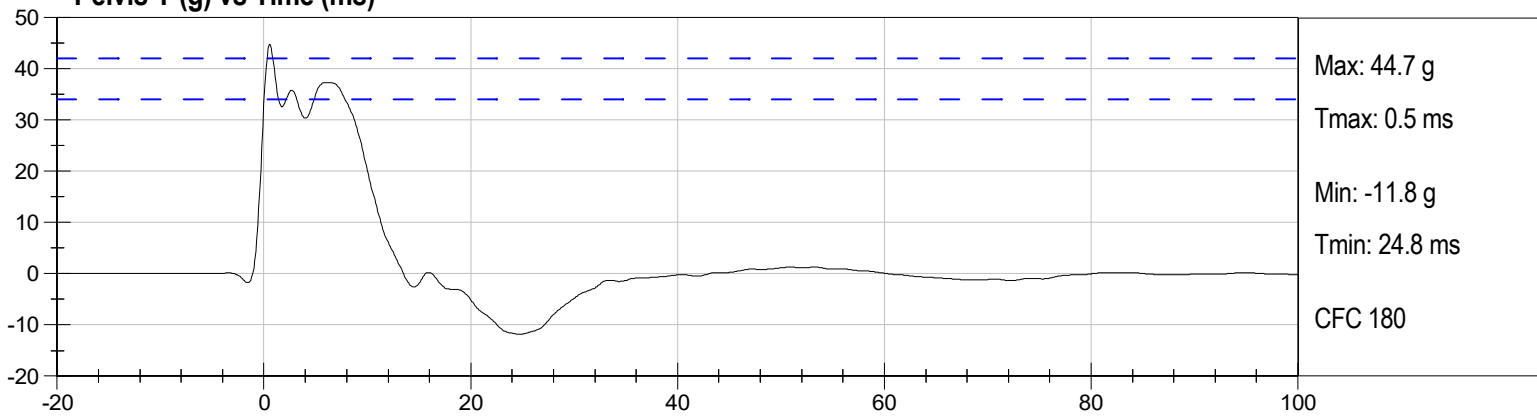

ACETABULUM FY (N) vs Time (ms)

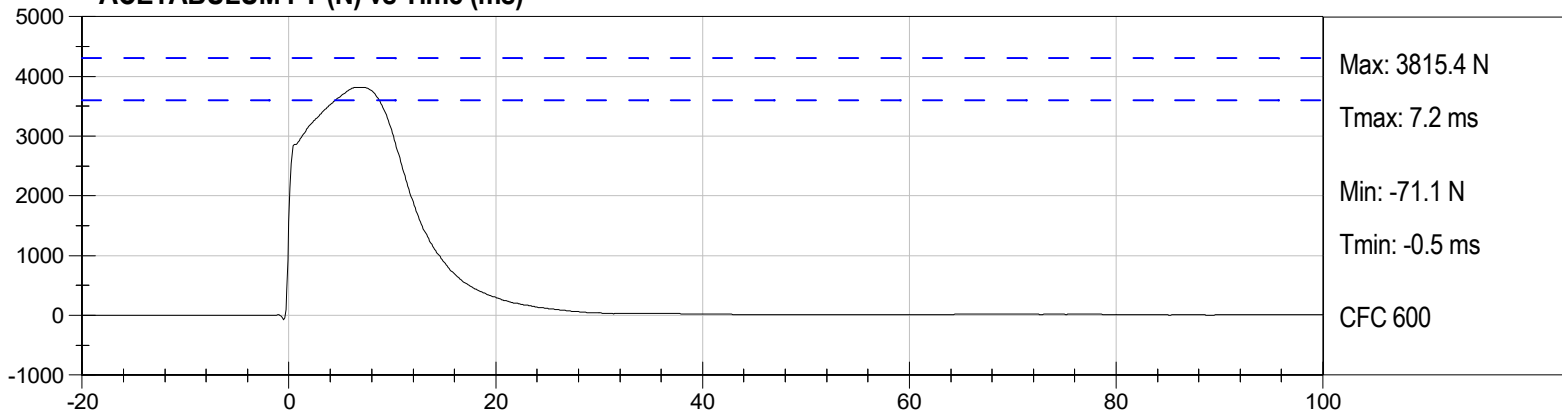




Iliac Impact Test
SID IIs
ATD Serial No: 296

Test Date: 04/24/2025
Test ID: D251258
Test Technician: Jonah Pulokas


Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.7	Pass
Laboratory Relative Humidity	%	10 to 70	44	Pass
Impact Velocity	m/s	4.2 to 4.4	4.34	Pass
Peak Probe Acceleration	g	36 to 45	38	Pass
Peak Pelvis Y Acceleration	g	28 to 39	29	Pass
Iliac Force	N	4100 to 5100	4386	Pass

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
PROBE	Endevco	P79577	03/21/2025	9/20/2025
PELVIS Y	Endevco	T22504	12/13/2024	6/14/2025
ILIUM CREST FY	Denton	IWG282FY	01/20/2025	1/20/2026


PROBE (g) vs Time (ms)

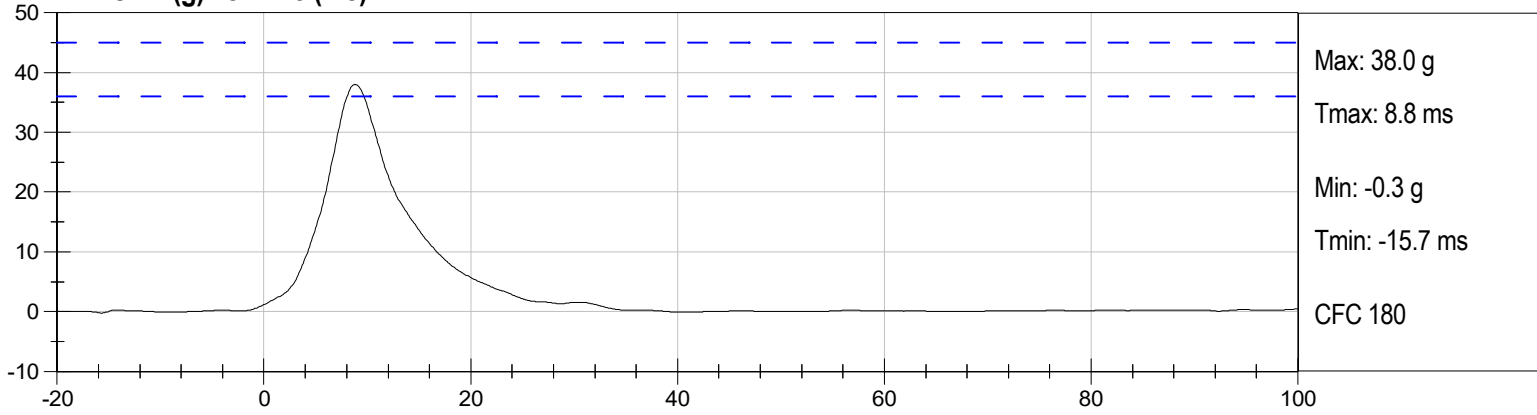

PELVIS Y (g) vs Time (ms)

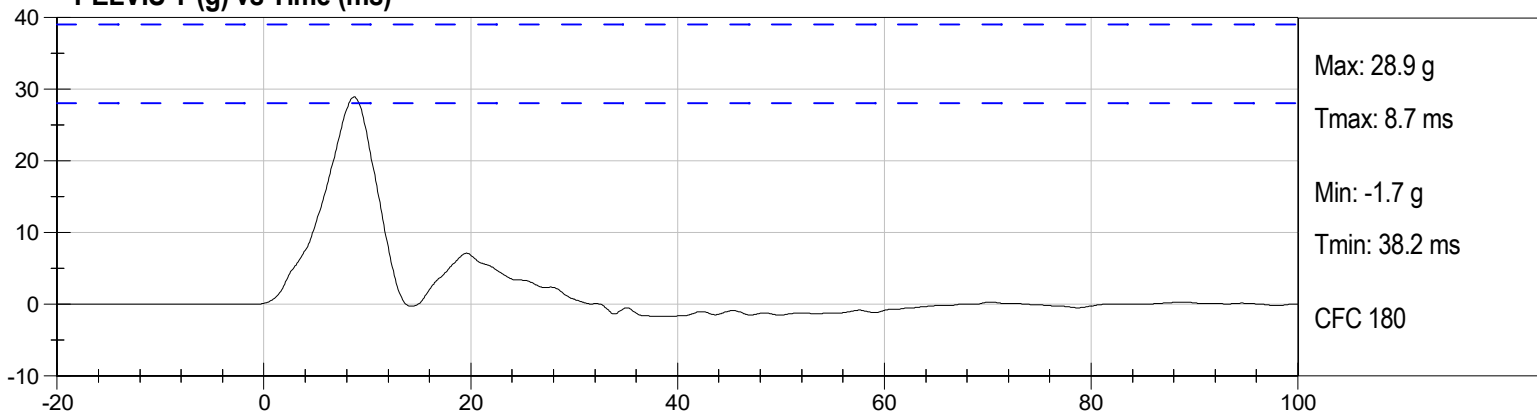

ILIUM CREST FY (N) vs Time (ms)

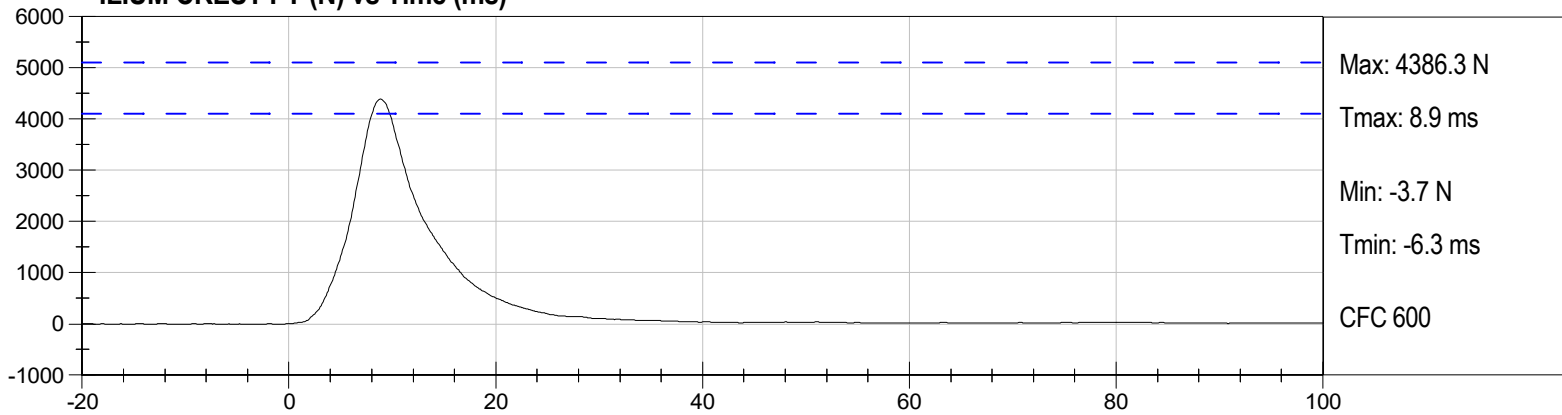

QUALIFICATION TEST RESULTS

POST-TEST





SID-IIS 5TH PERCENTILE FEMALE - DRIVER ATD

SID-IIsD External Measurements
SN: 296

No.	Name	Spec. (mm)	Result	Pass/Fail
A	Sitting Height	772 - 788	784	Pass
B	Shoulder Pivot Height	437 - 453	442	Pass
C	H-point Height	79 - 89	83	Pass
D	H-point from Seatback	141 - 151	145	Pass
E	Shoulder Pivot from Backline	97 - 107	99	Pass
F	Thigh Clearance	119 -135	121	Pass
G	Head Breadth	140 - 148	142	Pass
H	Head Back from Backline	40 - 46	45	Pass
I	Head Depth	178 - 188	180	Pass
J	Head Circumference	541 - 551	548	Pass
K	Buttock to Knee Length	514 - 540	535	Pass
L	Popliteal Height	343 - 369	358	Pass
M	Knee Pivot to Floor Height	392 - 409	404	Pass
N	Buttock Popliteal Length	416 - 442	435	Pass
O	Chest Depth w/o Jacket	195 - 211	206	Pass
P	Foot Length	216 - 232	219	Pass
Q	Hip Breadth (w/ pelvic plugs)	313 - 323	316	Pass
R	Arm Length	249 - 259	250	Pass
S	Knee Joint to Seatback	477 - 493	481	Pass
V	Shoulder Width	341 - 357	346	Pass
W	Foot Width	78 - 94	85	Pass
Y	Chest Circumference w/ jacket	851 - 881	870	Pass
Z	Waist Circumference	761 - 791	772	Pass

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.6	Pass
Laboratory Relative Humidity	%	10 to 70	43	Pass
Peak Resultant Acceleration	g	115 to 137	116	Pass
Peak Longitudinal Acceleration	g	-15.0 to 15.0	6.3	Pass
Unimodal	%	within 15% of peak	1	Pass


Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
HEAD Y	Endevco	T30974	05/27/2025	11/26/2025
HEAD X	Endevco	T30975	05/27/2025	11/26/2025
HEAD Z	Endevco	T30976	05/27/2025	11/26/2025

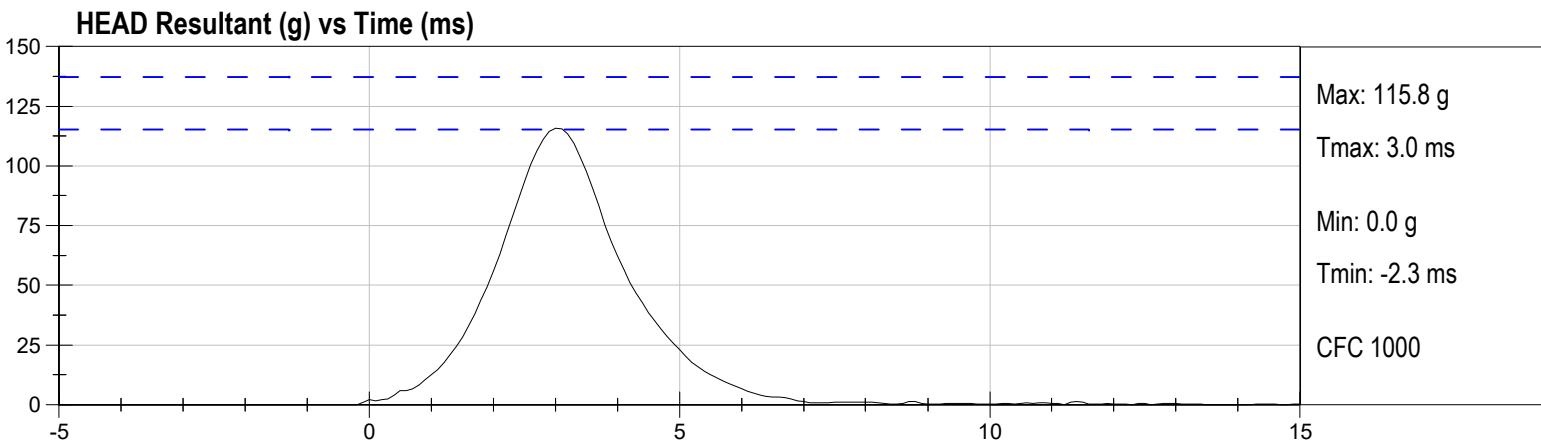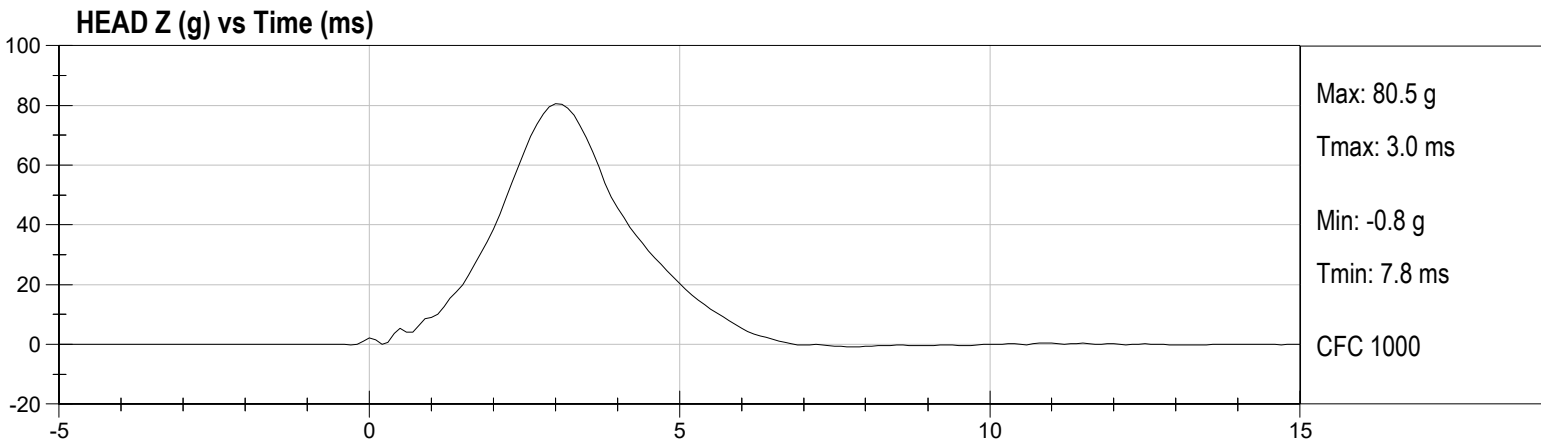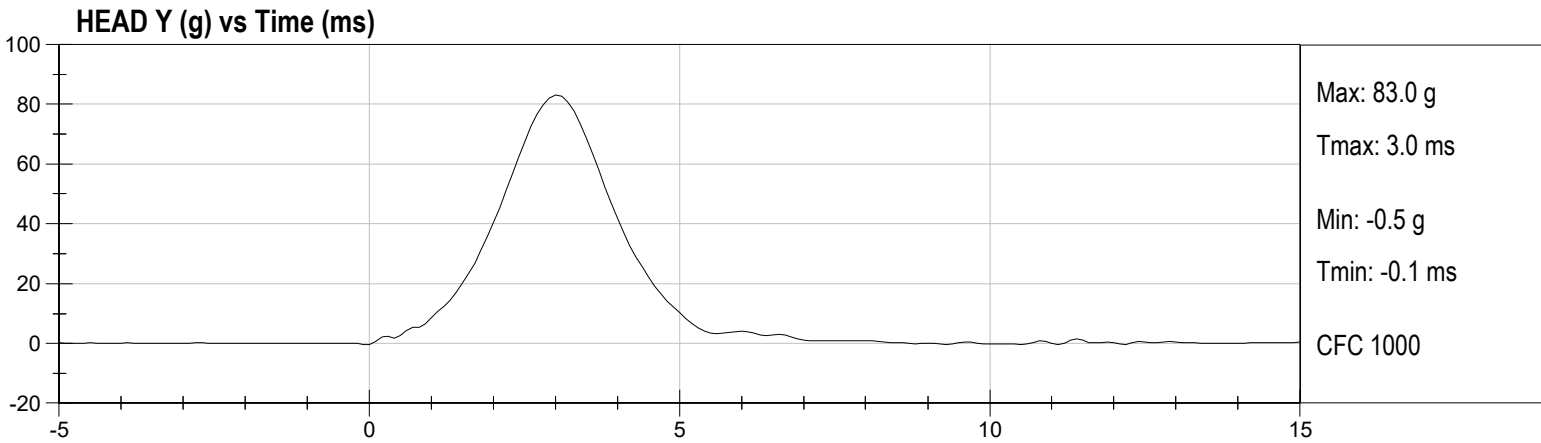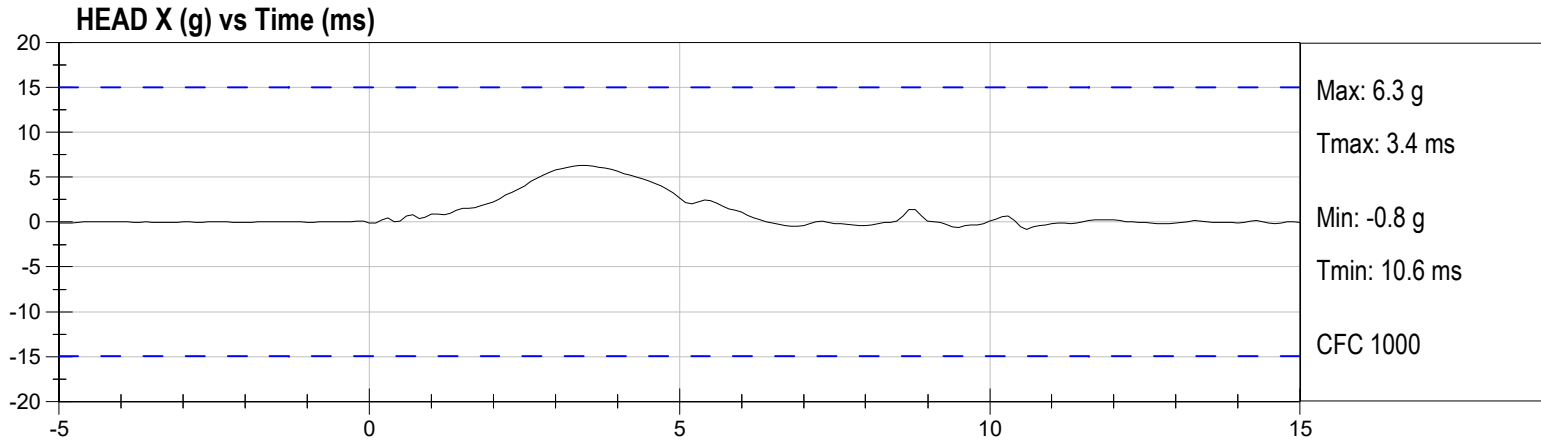


Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.6	Pass
Laboratory Relative Humidity	%	10 to 70	39	Pass
Impact Velocity	m/s	5.51 to 5.63	5.62	Pass
Pendulum Velocity at 10 ms	m/s	2.20 to 2.80	2.30	Pass
Pendulum Velocity at 15 ms	m/s	3.30 to 4.10	3.61	Pass
Pendulum Velocity at 20 ms	m/s	4.40 to 5.40	5.20	Pass
Pendulum Velocity at 25 ms	m/s	5.40 to 6.10	5.87	Pass
Peak Pendulum Velocity from 25 to 100 ms	m/s	5.50 to 6.20	5.90	Pass
Maximum "D" Plane Rotation	deg	71 to 81	76	Pass
Time of Maximum "D" Plane Rotation	ms	50 to 70	63	Pass
Maximum Moment About Occipital Condyle	Nm	-44 to -36	-40	Pass
Time of Moment Decay Time To 0 Nm	ms	102 to 126	119	Pass

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
PEND. ACCEL.	Endevco	AH5P1	07/09/2025	1/8/2026
NECK FORCE Y	Denton	N1021FY	02/19/2025	2/19/2026
NECK MOMENT X	Denton	N1021MX	02/19/2025	2/19/2026
POT. A - FRONT	Servo	2732	07/16/2025	1/15/2026
POT. C - HEADFORM	Servo	2204	07/16/2025	1/15/2026


PEND. ACCEL. Velocity (m/s) vs Time (ms)

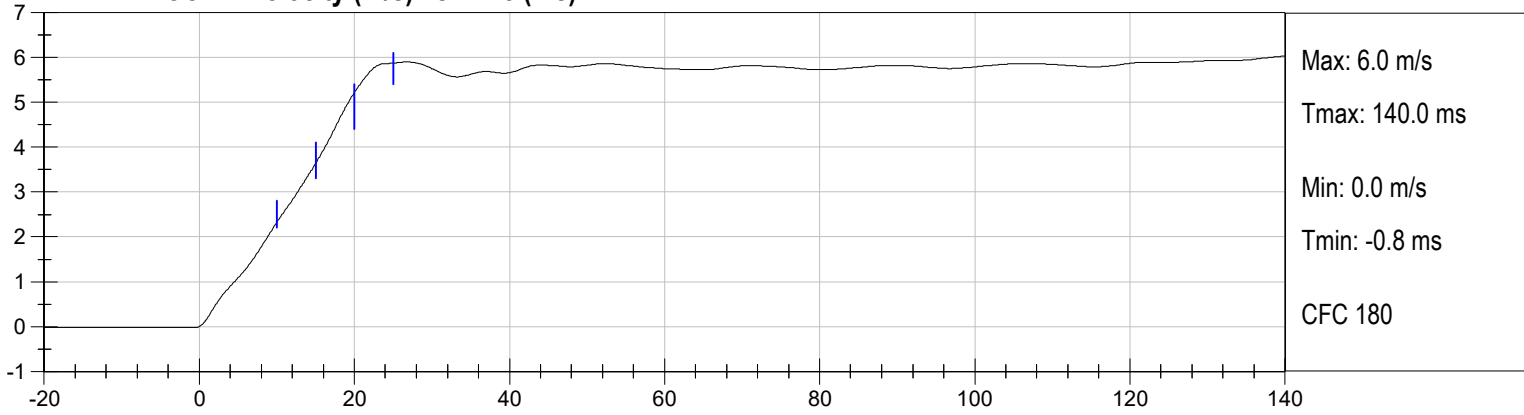

FLEXION ANGLE (deg) vs Time (ms)



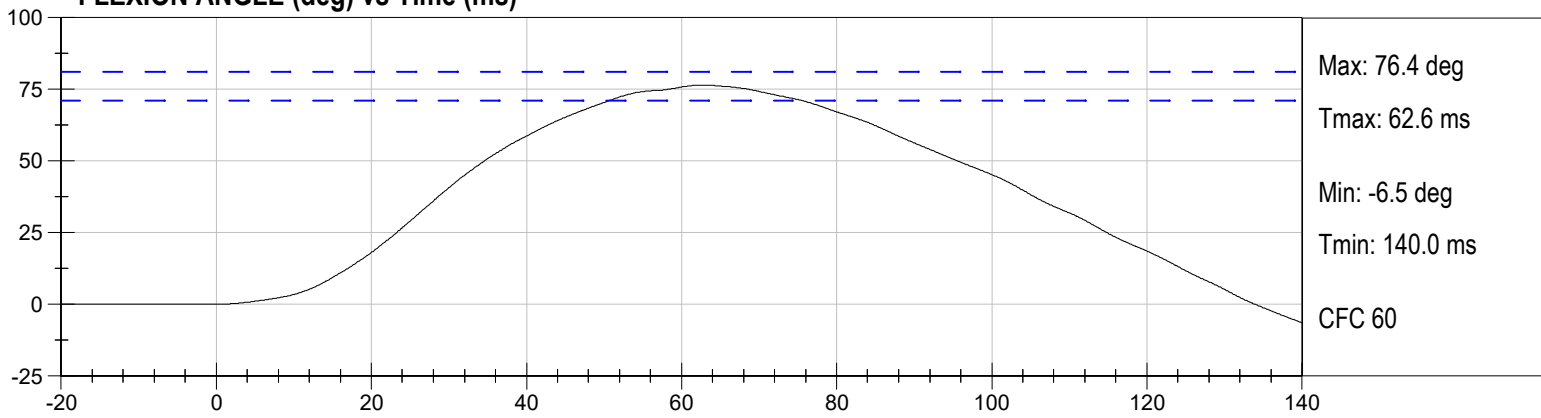


OCCIPITAL MOMENT (Nm) vs Time (ms)

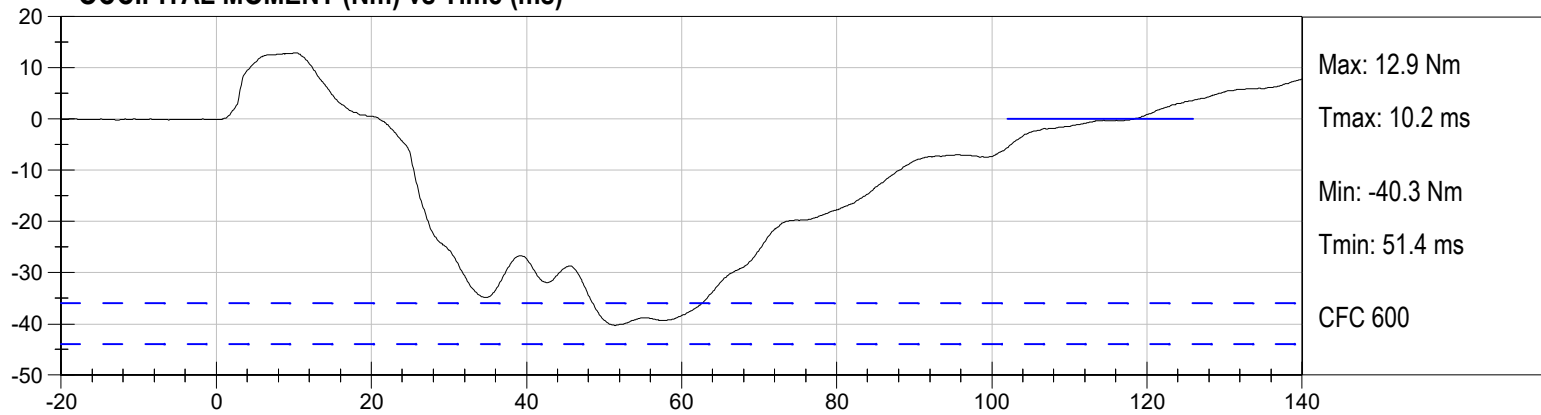




Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.5	Pass
Laboratory Relative Humidity	%	10 to 70	45	Pass
Impact Velocity	m/s	4.2 to 4.4	4.34	Pass
Peak Probe Acceleration	g	13 to 18	15	Pass
Shoulder Displacement	mm	28 to 37	30	Pass
Upper Spine (T1) Y Acceleration	g	17 to 22	19	Pass

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
PROBE	Endevco	P79577	03/21/2025	9/20/2025
UPPER SPINE Y	Endevco	P88675	05/29/2025	11/28/2025
SHOULDER DY	FTSS	G1223	05/27/2025	11/26/2025

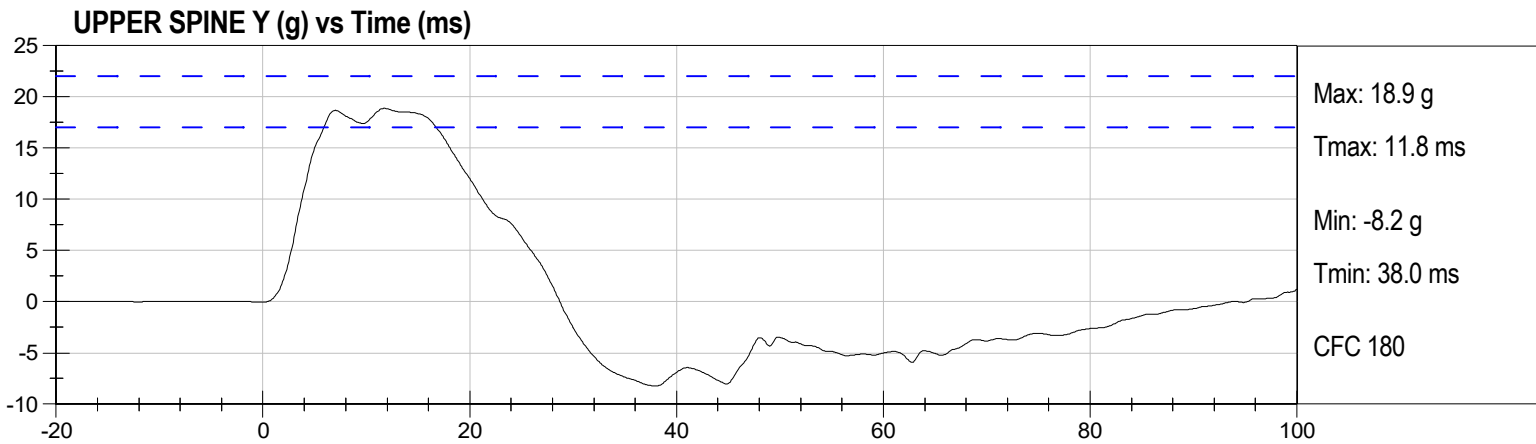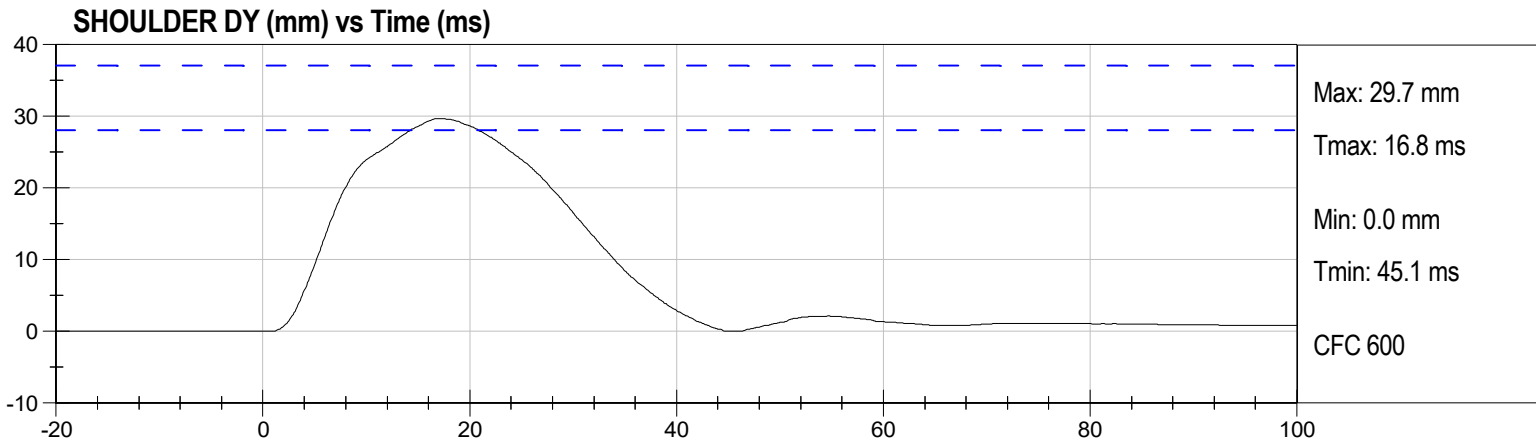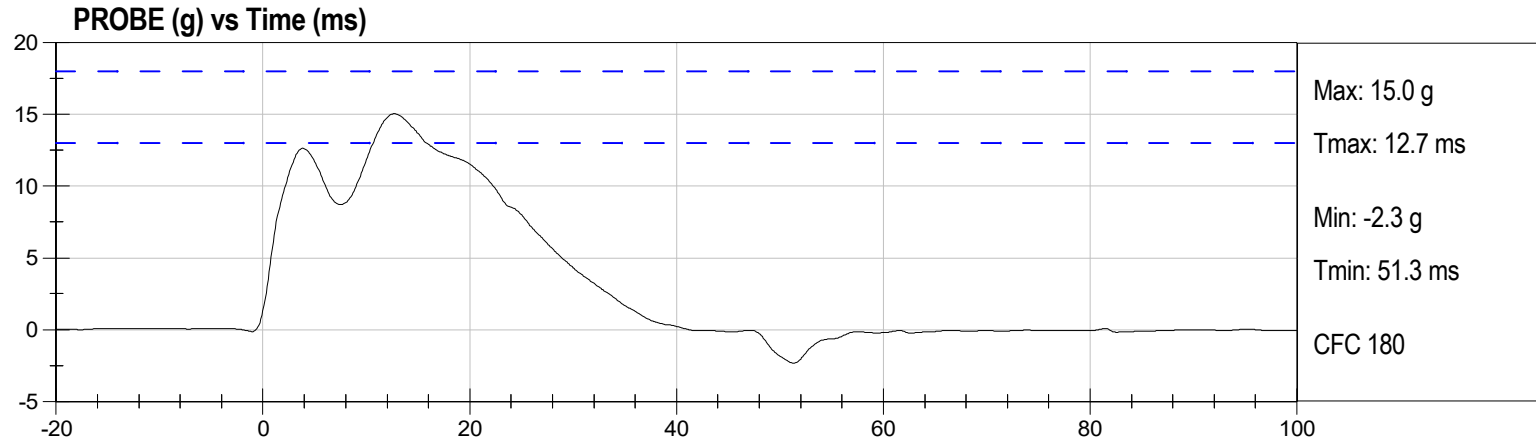


Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.7	Pass
Laboratory Relative Humidity	%	10 to 70	45	Pass
Impact Velocity	m/s	6.6 to 6.8	6.80	Pass
Peak Probe Acceleration after 5 ms	g	30 to 36	34	Pass
Upper Spine (T1) Y Acceleration	g	34 to 43	38	Pass
Lower Spine (T12) Y Acceleration	g	29 to 37	32	Pass
Shoulder Displacement	mm	31 to 40	36	Pass
Upper Thorax Rib Displacement	mm	25 to 32	28	Pass
Middle Thorax Rib Displacement	mm	30 to 36	32	Pass
Lower Thorax Rib Displacement	mm	32 to 38	34	Pass


Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
PROBE	Endevco	P79577	03/21/2025	9/20/2025
UPPER SPINE Y	Endevco	P88675	05/29/2025	11/28/2025
LOWER SPINE Y	Endevco	P79439	05/29/2025	11/28/2025
SHOULDER DY	FTSS	G1223	05/27/2025	11/26/2025
UPPER THORAX RIB DY	Servo	G012	05/27/2025	11/26/2025
MID THORAX RIB DY	FTSS	G1163	05/27/2025	11/26/2025
LOWER THORAX RIB DY	FTSS	G1158	05/27/2025	11/26/2025

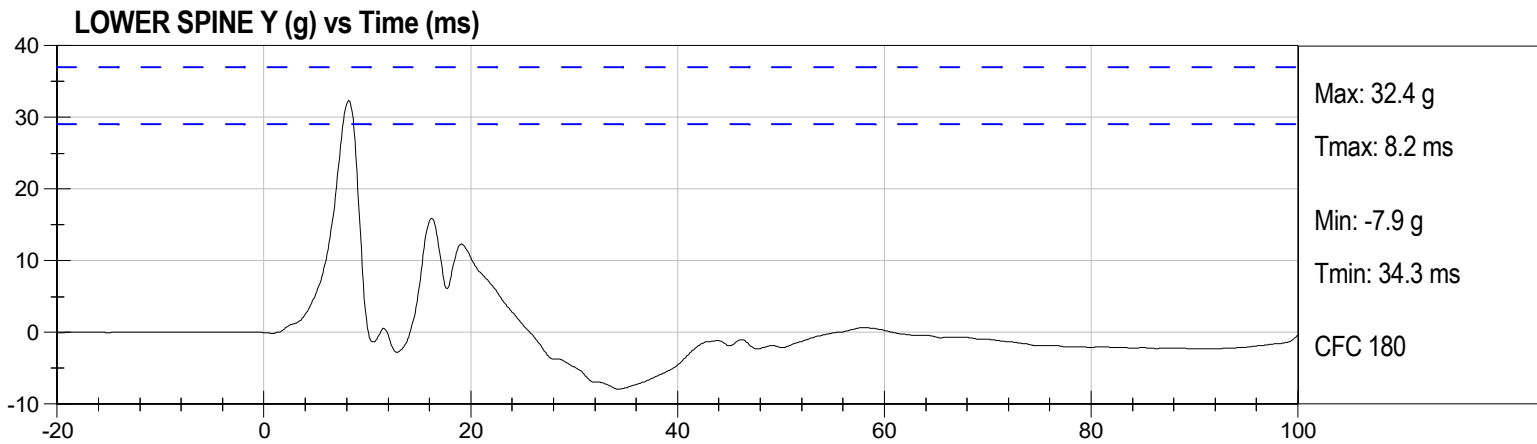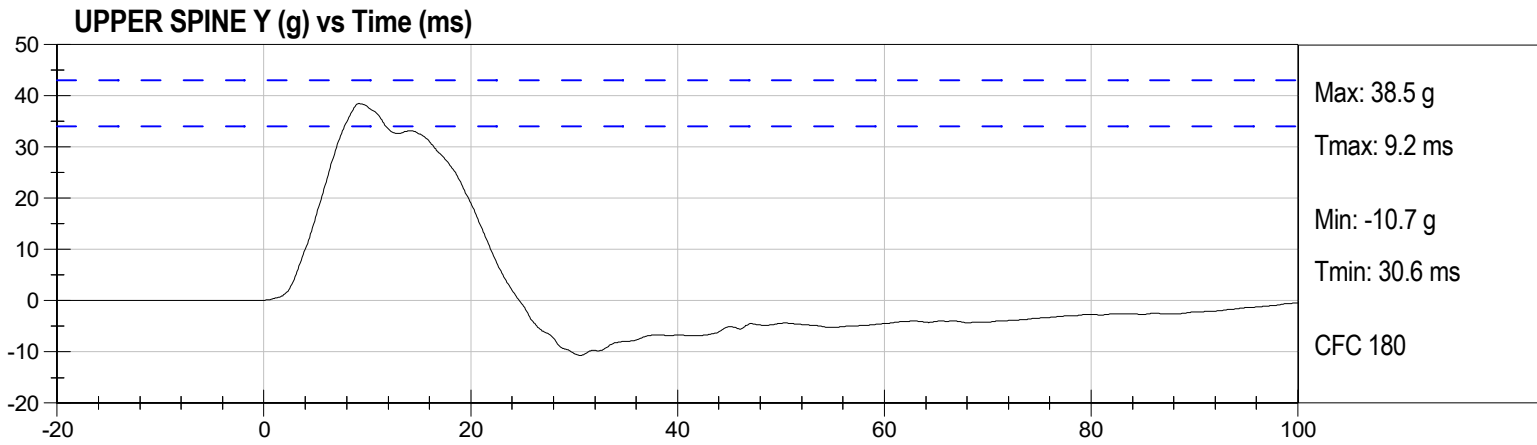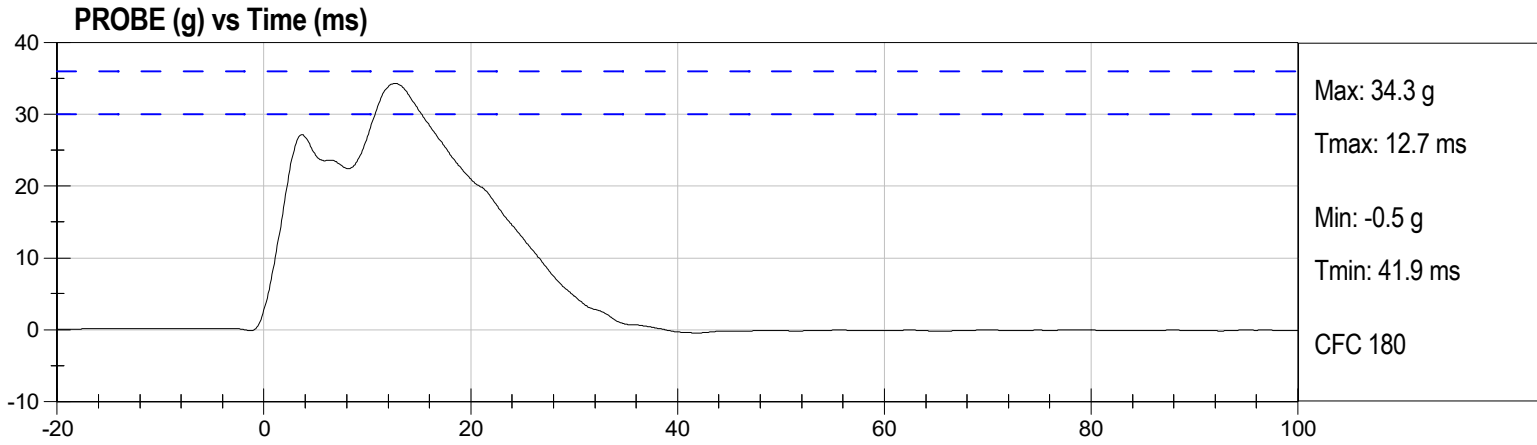


SHOULDER DY (mm) vs Time (ms)

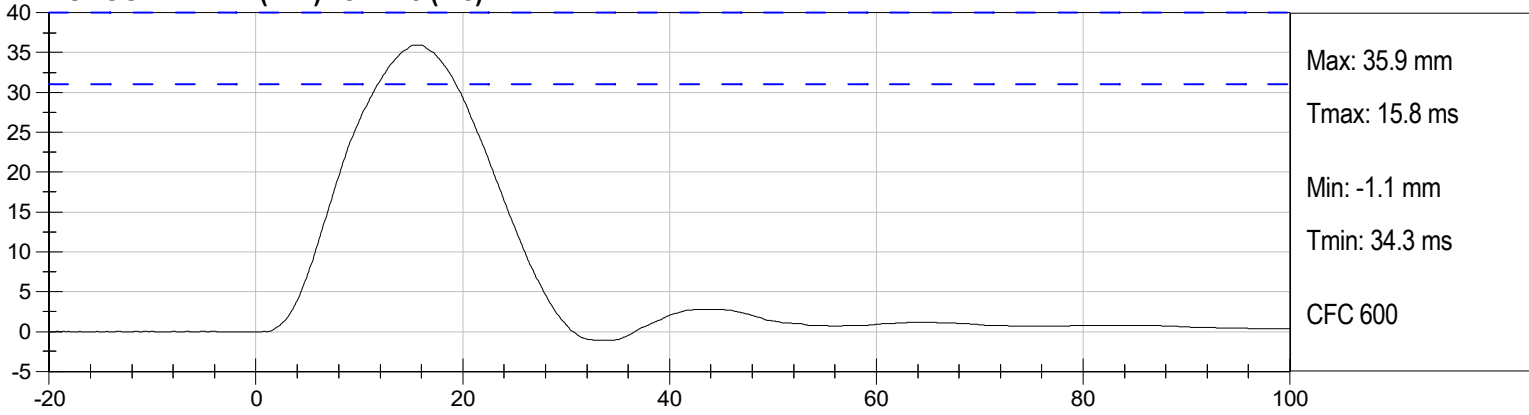


UPPER THORAX RIB DY (mm) vs Time (ms)

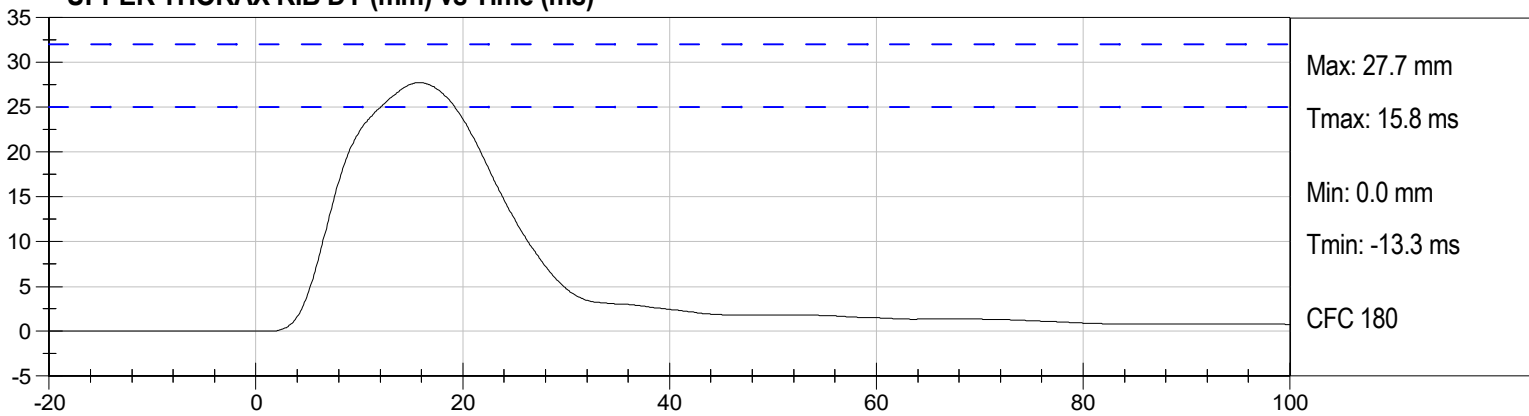

MID THORAX RIB DY (mm) vs Time (ms)

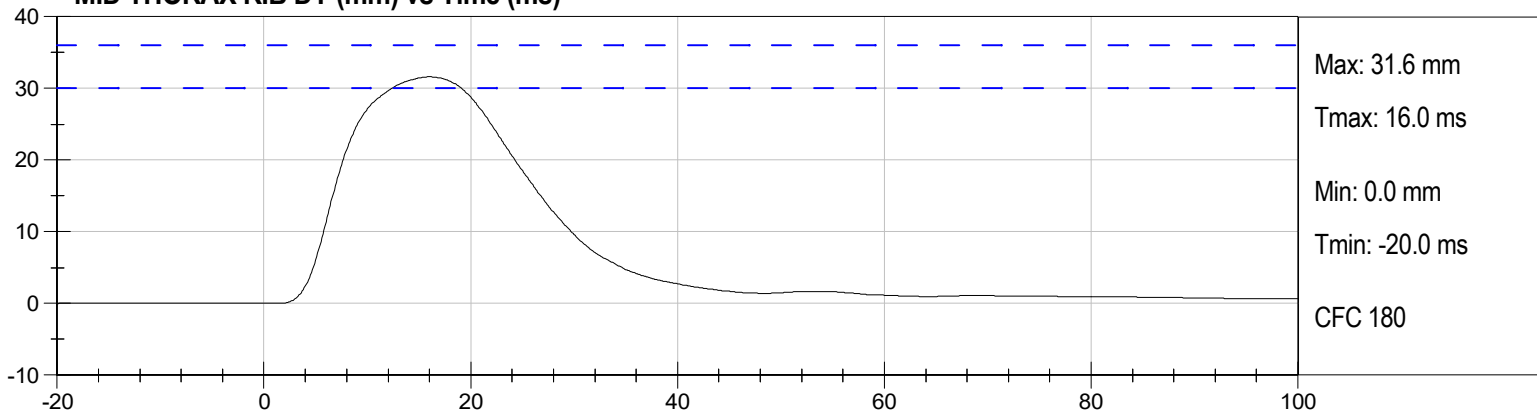


LOWER THORAX RIB DY (mm) vs Time (ms)

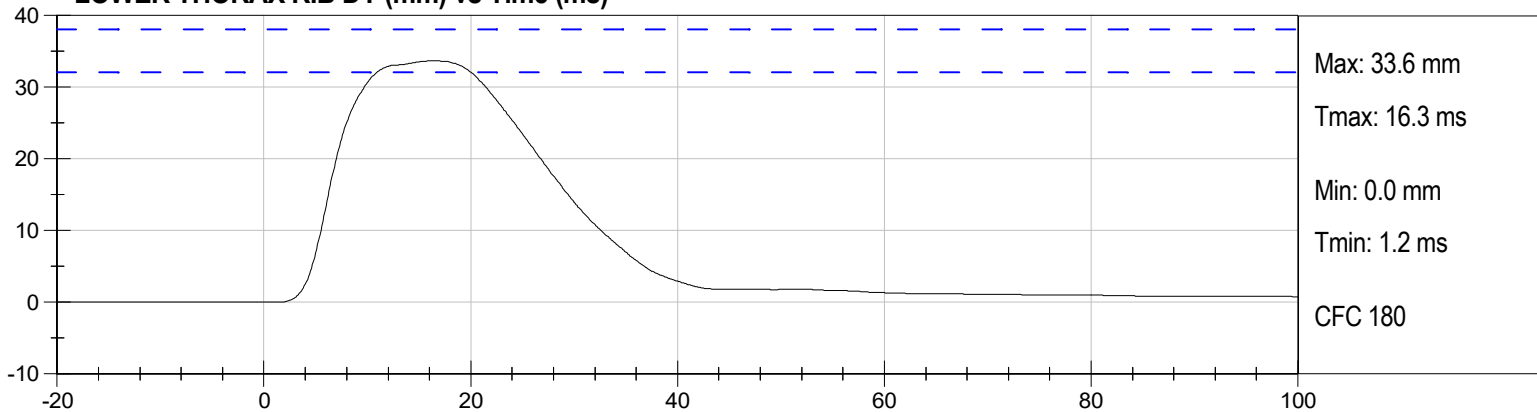


Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	45	Pass
Impact Velocity	m/s	4.2 to 4.4	4.31	Pass
Peak Probe Acceleration	g	14 to 18	15	Pass
Upper Spine (T1) Y Acceleration	g	13 to 17	14	Pass
Lower Spine (T12) Y Acceleration	g	7 to 11	10	Pass
Upper Thorax Rib Displacement	mm	32 to 40	37	Pass
Middle Thorax Rib Displacement	mm	39 to 45	42	Pass
Lower Thorax Rib Displacement	mm	35 to 43	39	Pass

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
PROBE	Endevco	P79577	03/21/2025	9/20/2025
UPPER SPINE Y	Endevco	P88675	05/29/2025	11/28/2025
LOWER SPINE Y	Endevco	P79439	05/29/2025	11/28/2025
UPPER THORAX RIB DY	Servo	G012	05/27/2025	11/26/2025
MID THORAX RIB DY	FTSS	G1163	05/27/2025	11/26/2025
LOWER THORAX RIB DY	FTSS	G1158	05/27/2025	11/26/2025


PROBE (g) vs Time (ms)

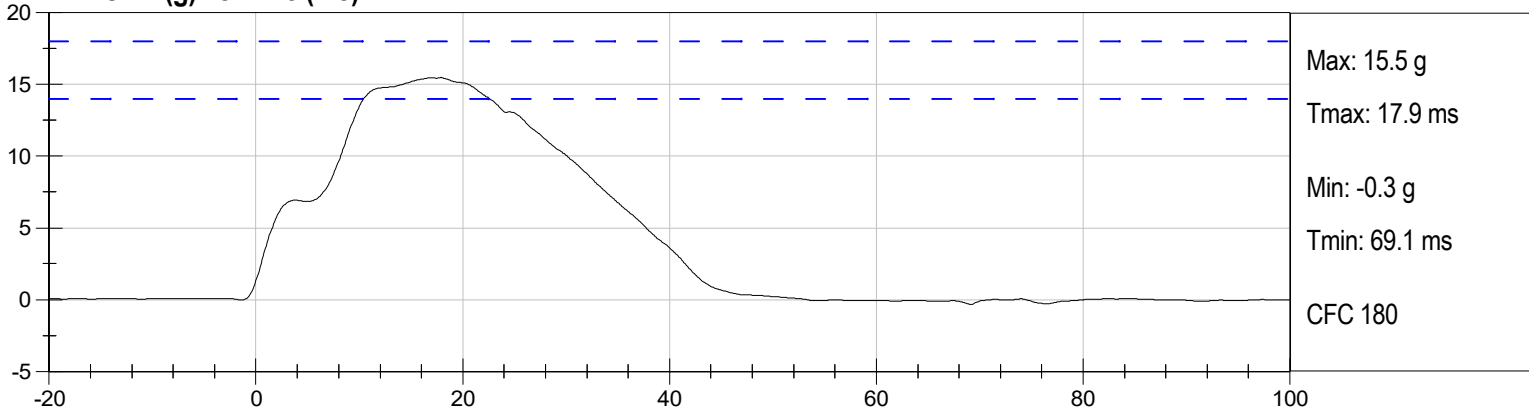


UPPER SPINE Y (g) vs Time (ms)

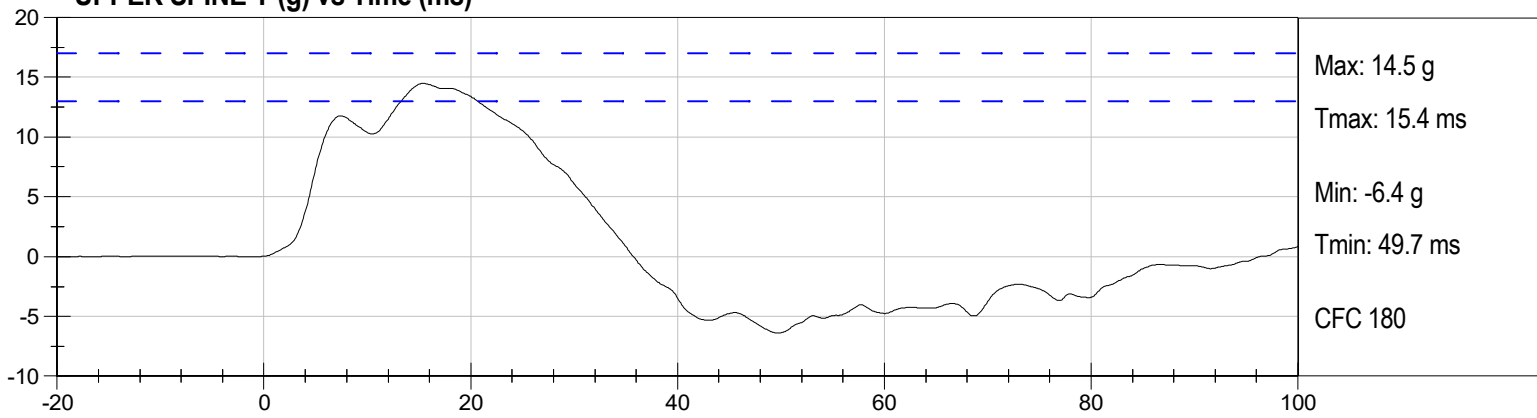


LOWER SPINE Y (g) vs Time (ms)

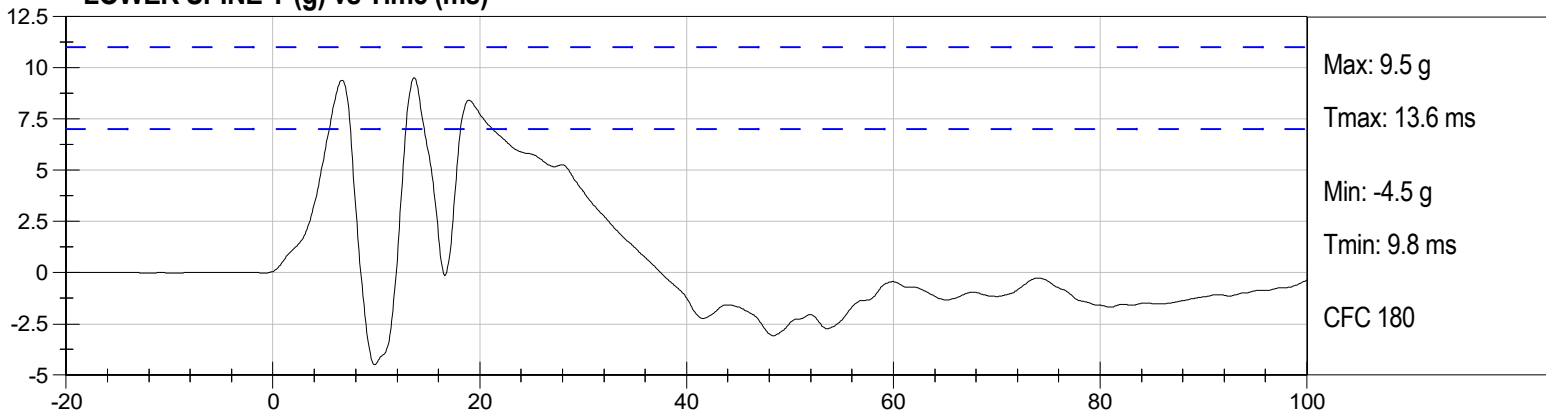


UPPER THORAX RIB DY (mm) vs Time (ms)

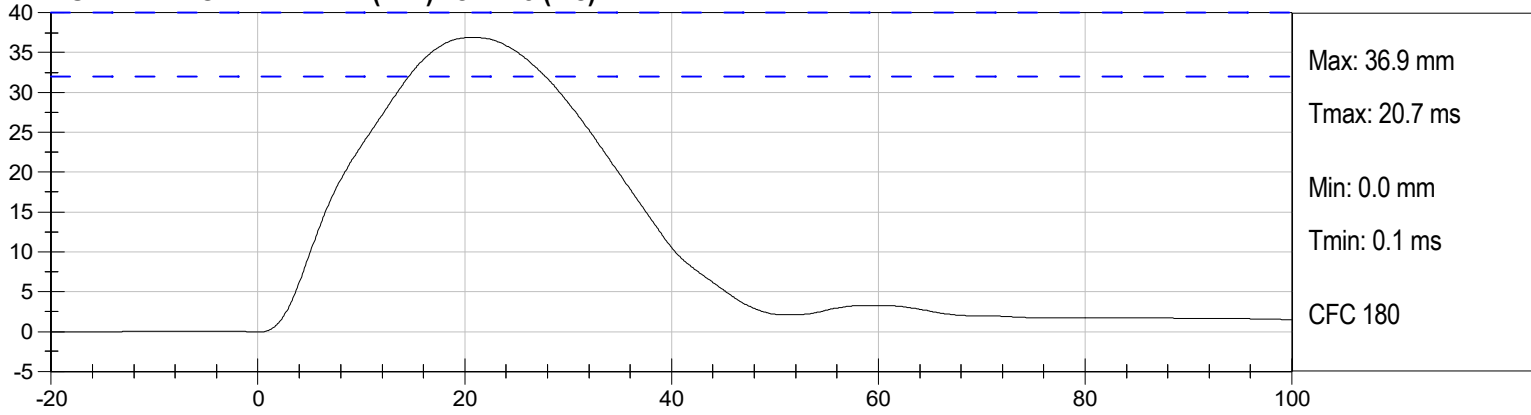

MID THORAX RIB DY (mm) vs Time (ms)

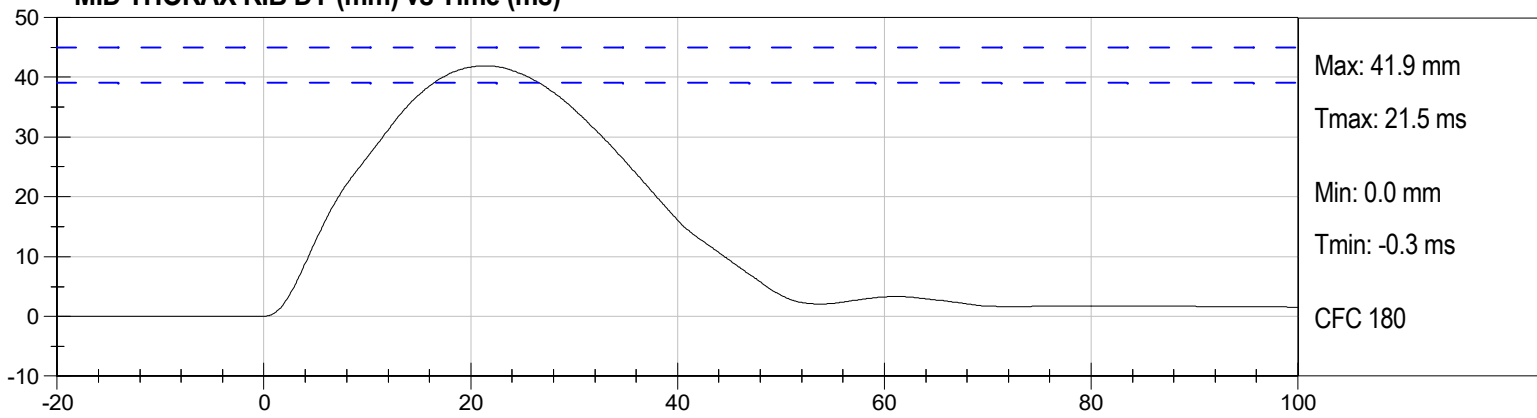


LOWER THORAX RIB DY (mm) vs Time (ms)

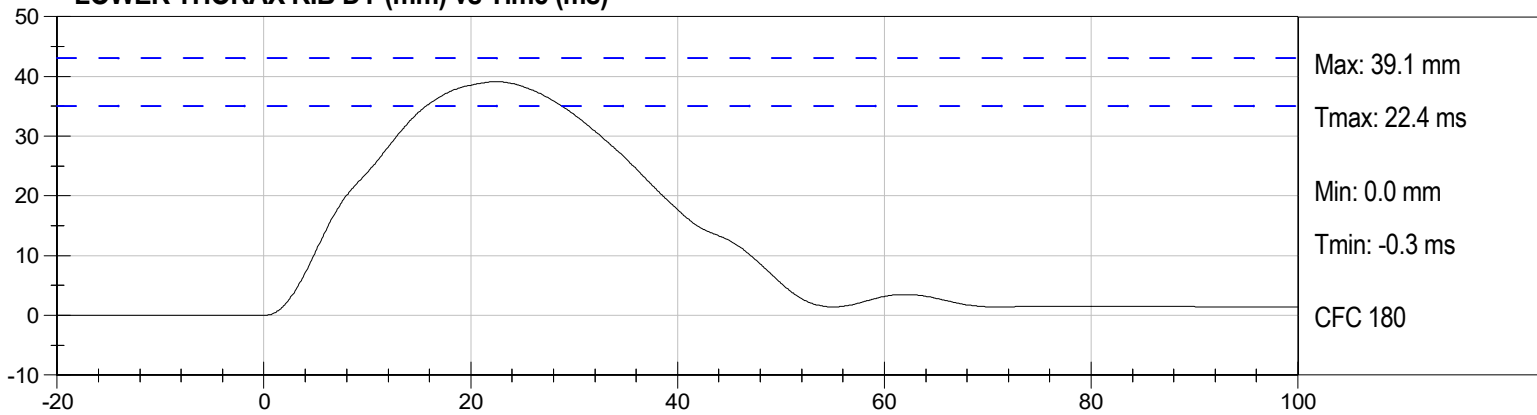


Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	45	Pass
Impact Velocity	m/s	4.2 to 4.4	4.27	Pass
Peak Probe Acceleration	g	12 to 16	14	Pass
Lower Spine (T12) Y Acceleration	g	9 to 14	11	Pass
Upper Abdomen Rib Displacement	mm	36 to 47	43	Pass
Lower Abdomen Rib Displacement	mm	33 to 44	39	Pass

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
PROBE	Endevco	P79577	03/21/2025	9/20/2025
LOWER SPINE Y	Endevco	P79439	05/29/2025	11/28/2025
UPPER ABDOMINAL RIB DY	FTSS	G1146	05/27/2025	11/26/2025
LOWER ABDOMINAL RIB DY	FTSS	G1126	05/27/2025	11/26/2025


PROBE (g) vs Time (ms)

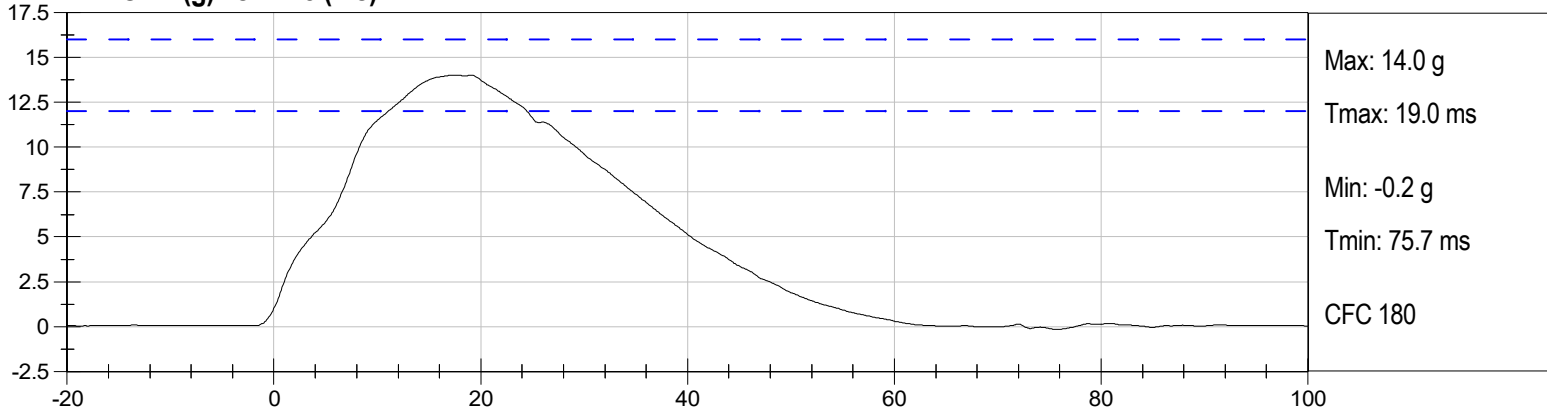


LOWER SPINE Y (g) vs Time (ms)

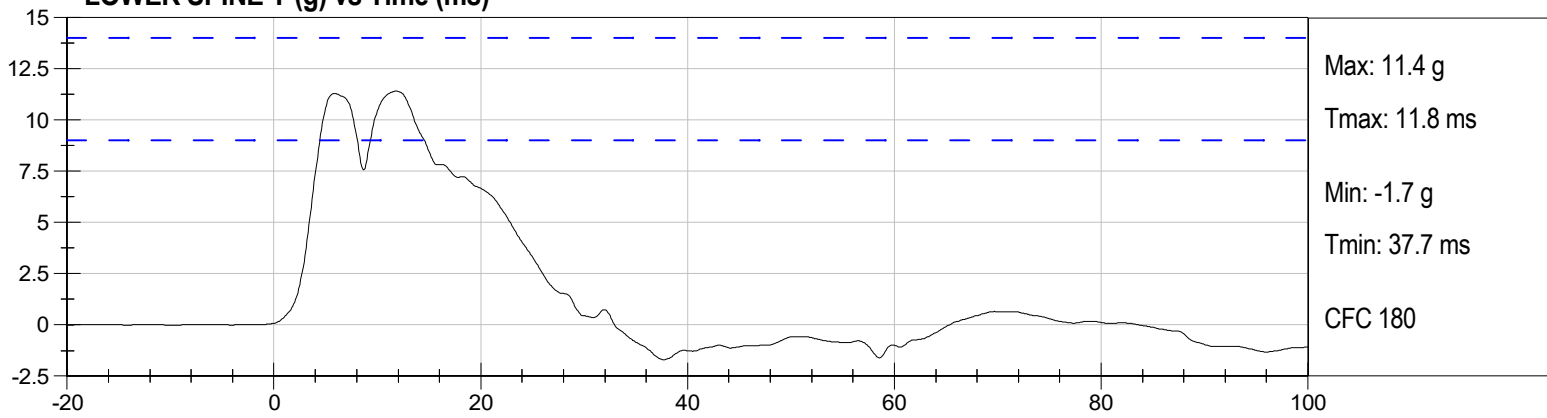

UPPER ABDOMINAL RIB DY (mm) vs Time (ms)

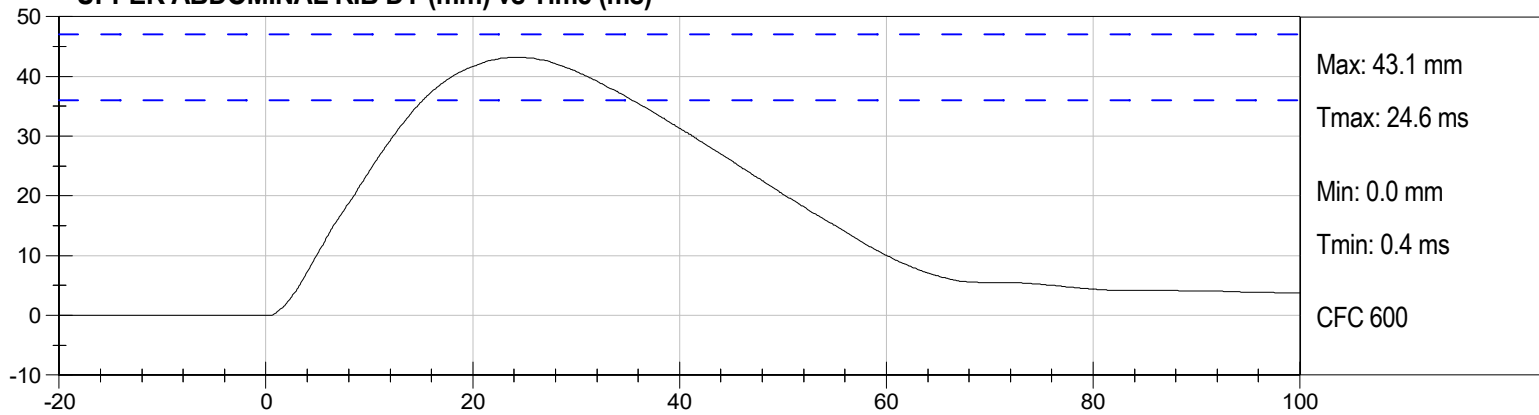


LOWER ABDOMINAL RIB DY (mm) vs Time (ms)

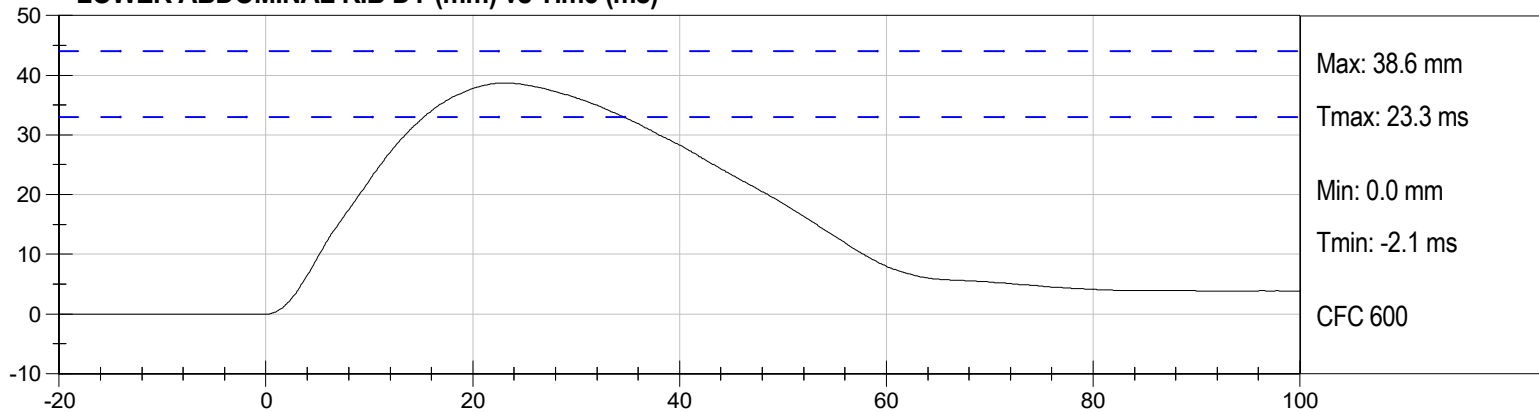


Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.6	Pass
Laboratory Relative Humidity	%	10 to 70	46	Pass
Impact Velocity	m/s	6.6 to 6.8	6.68	Pass
Peak Probe Acceleration	g	38 to 47	41	Pass
Peak Pelvis Y Acceleration after 6 ms	g	34 to 42	40.9	Pass
Acetabulum Force	N	3600 to 4300	3653	Pass

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
PROBE	Endevco	P79577	03/21/2025	9/20/2025
PELVIS Y	Endevco	T22504	05/29/2025	11/28/2025
ACETABULUM FY	Denton	ACG259FY	05/28/2025	5/28/2026


PROBE (g) vs Time (ms)

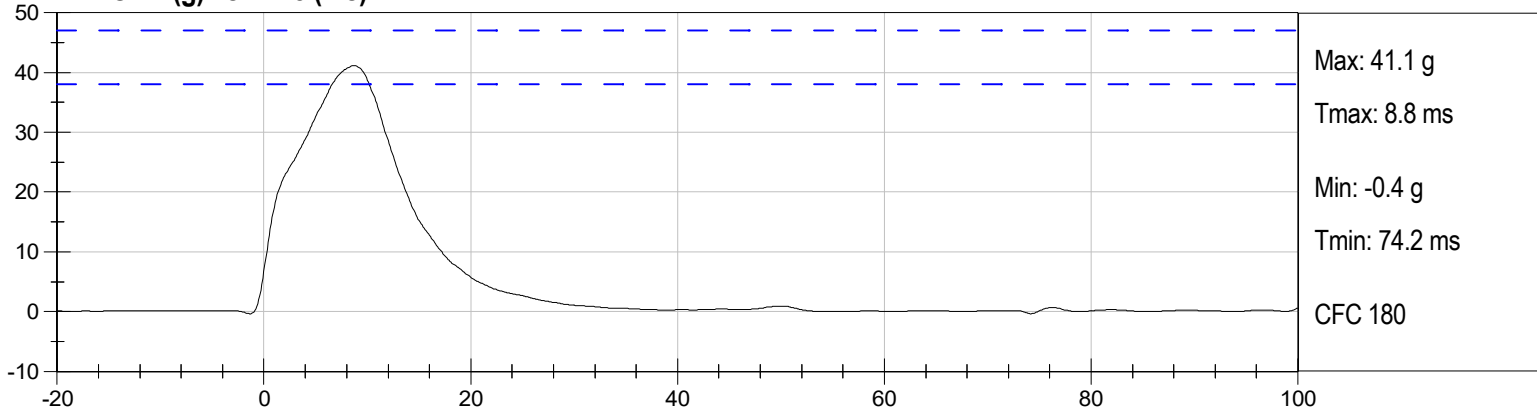

PELVIS Y (g) vs Time (ms)

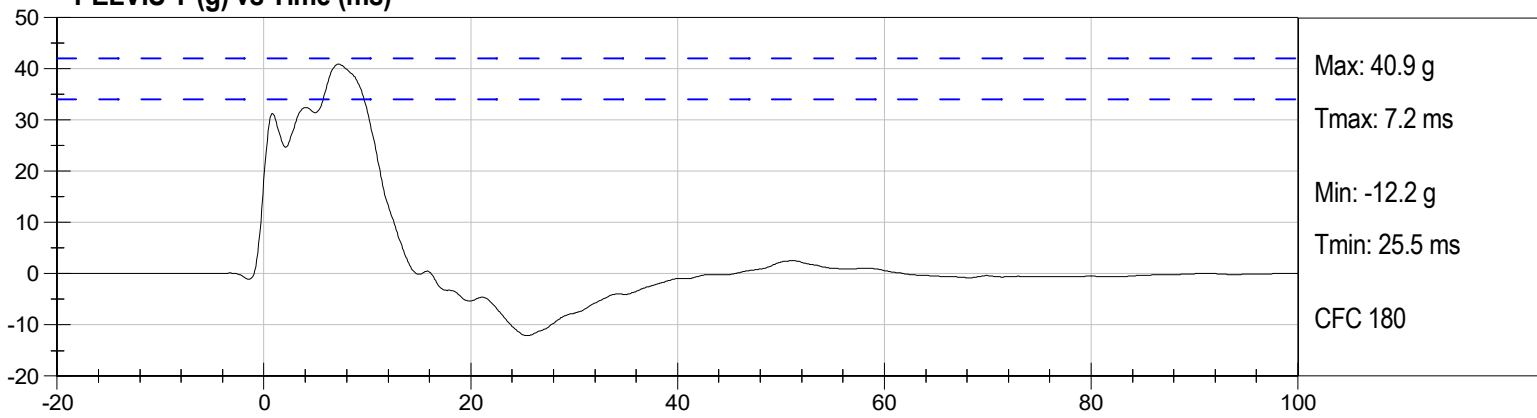


ACETABULUM FY (N) vs Time (ms)

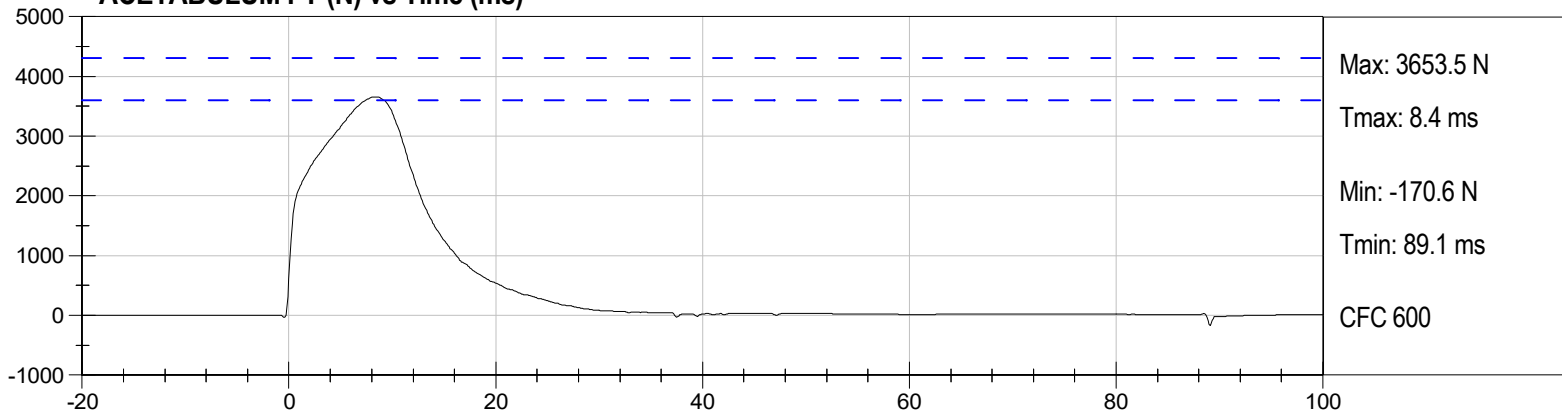


Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.6	Pass
Laboratory Relative Humidity	%	10 to 70	44	Pass
Impact Velocity	m/s	4.2 to 4.4	4.23	Pass
Peak Probe Acceleration	g	36 to 45	41	Pass
Peak Pelvis Y Acceleration	g	28 to 39	33	Pass
Iliac Force	N	4100 to 5100	4839	Pass

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
PROBE	Endevco	P79577	03/21/2025	9/20/2025
PELVIS Y	Endevco	T22504	05/29/2025	11/28/2025
ILIUM CREST FY	Denton	IWG286FY	05/28/2025	5/28/2026


PROBE (g) vs Time (ms)

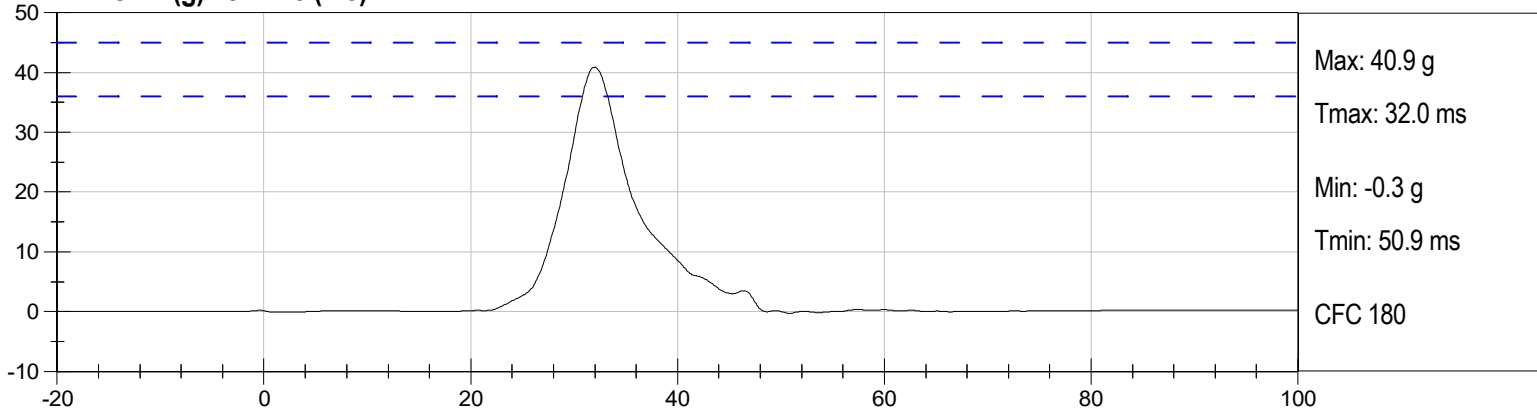

PELVIS Y (g) vs Time (ms)

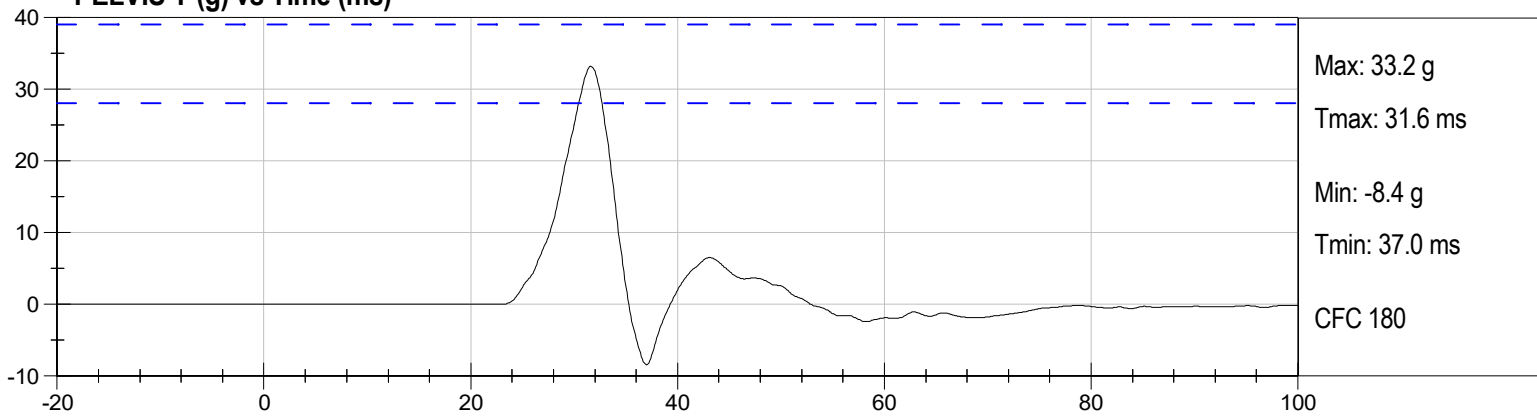

ILIUM CREST FY (N) vs Time (ms)

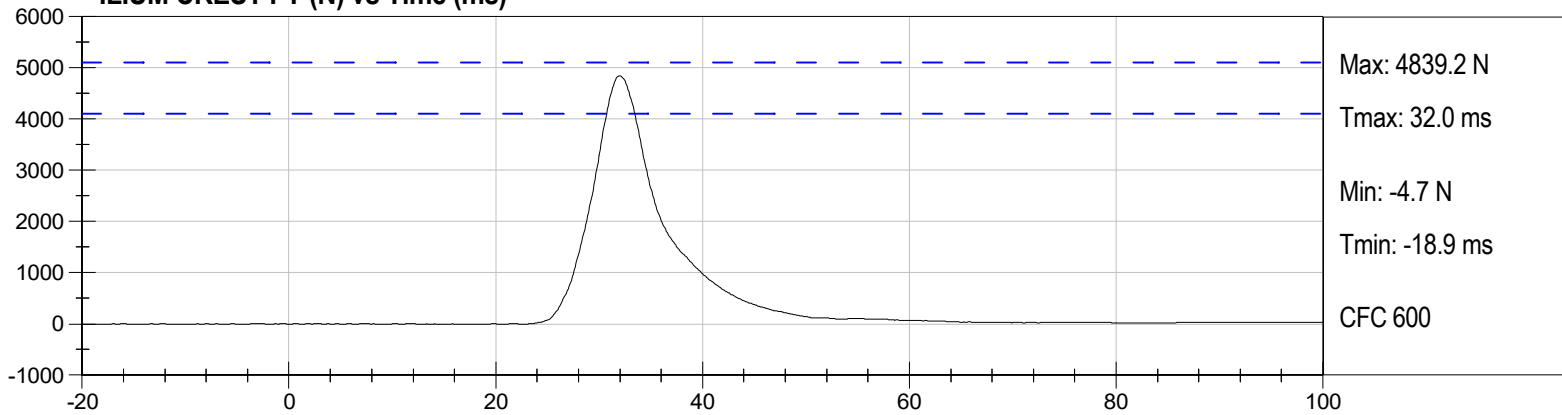



SID-IIs Pelvis Plug Certification Test

Plug S/N 16450

Test Number 23019

Report Number 23077

Test Date 5/23/2022 12:25:23 PM

	Test Results	Spec Min	Spec Max
Force @ 0.5 mm (N)	337	50	600
Force @ 1.5 mm (N)	1,172	850	1,400
Force @ 2.5 mm (N)	1,425	1,306	1,618
Force @ 3.0 mm (N)	1,474	1,361	1,673

Testing Machine STM-20 5965542


Load Cell S/N (FI360947), Units (LBS) 1000

Crosshead Speed (mm / min) or Rate 12.7

Extension or Position Measured by XHD_100 (XHD100)

Notes:

Force (-N) vs Extension (-mm)

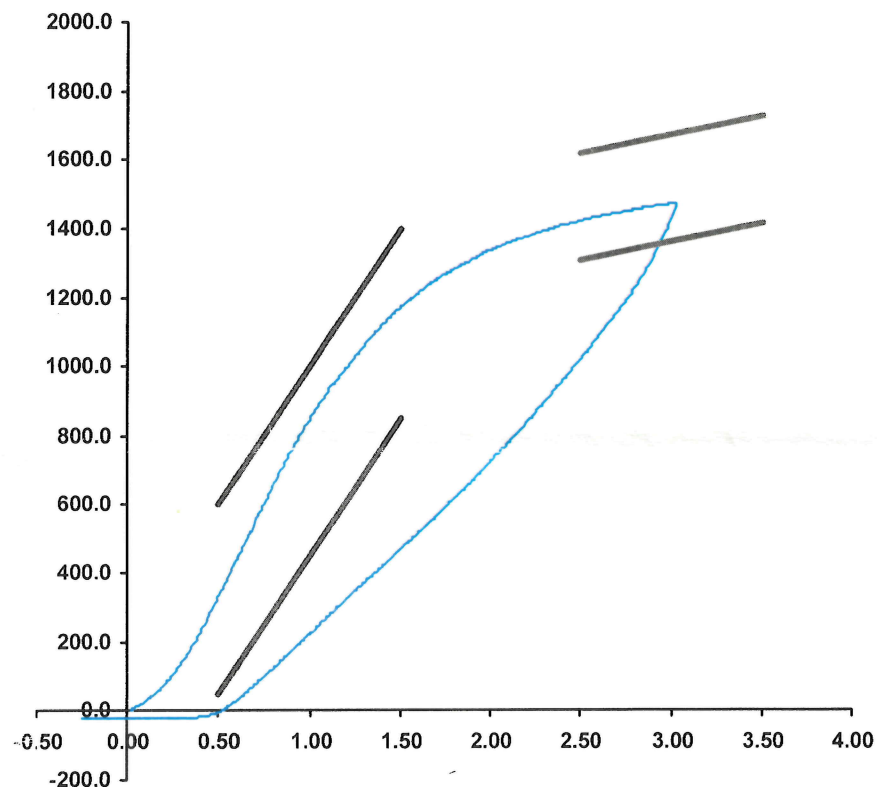

Operator

Part Number 180-4450

Template No 107

23-May-22

SACO Research

By: DC

Date: 5/23/2022



SID-IIs Pelvis Plug Certification Test

Plug S/N 16429

Test Number 22998

Report Number 23056

Test Date 5/23/2022 10:58:00 AM

	Test Results	Spec Min	Spec Max
Force @ 0.5 mm (N)	309	50	600
Force @ 1.5 mm (N)	1,172	850	1,400
Force @ 2.5 mm (N)	1,442	1,306	1,618
Force @ 3.0 mm (N)	1,492	1,361	1,673

Testing Machine STM-20 5965542


Load Cell S/N (FI360947), Units (LBS) 1000

Crosshead Speed (mm / min) or Rate 12.7

Extension or Position Measured by XHD_100 (XHD100)

Notes:

Force (-N) vs Extension (-mm)

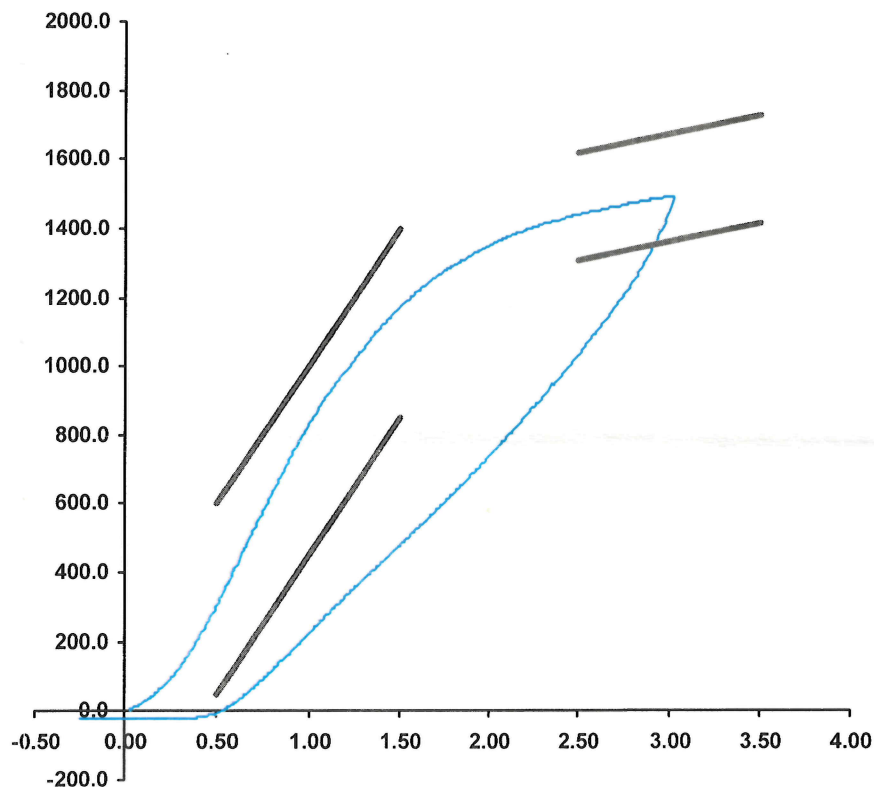

Operator

Part Number 180-4450

Template No 107

23-May-22

SACO Research

By :

DC

Date :

5/23/2022

APPENDIX D
TEST EQUIPMENT AND INSTRUMENTATION CALIBRATION

Table 1 – Dummy Instrumentation

				SID-IIs S/N 296			
				Serial Number	Manufacturer	Calibration Date	
Head CG Accelerometers				X	P82109	Endevco	05/29/2025
				Y	P94783	Endevco	05/29/2025
				Z	P94786	Endevco	05/29/2025
				Xr	P94938	Endevco	05/29/2025
				Yr	P96854	Endevco	05/29/2025
				Zr	P97386	Endevco	05/29/2025
Head Angular Rate Sensors				X	ARS15213	DTS	07/31/2024
				Y	ARS15229	DTS	07/31/2024
				Z	ARS15231	DTS	07/31/2024
Displacement Potentiometers	Thoracic Rib	Upper	Y	G012	Servo	05/27/2025	
		Middle	Y	G1163	FTSS	05/27/2025	
		Lower	Y	G1158	FTSS	05/27/2025	
	Abdominal Rib	Upper	Y	G1146	FTSS	05/27/2025	
		Lower	Y	G1126	FTSS	05/27/2025	
Lower Spine Accelerometers (T12)				X	P79614	Endevco	05/29/2025
				Y	P79439	Endevco	05/29/2025
				Z	P79418	Endevco	05/29/2025
Acetabulum Load Cell				Y	ACG259	Denton	05/28/2025
Iliac Wing Load Cell				Y	IWG286	Denton	05/28/2025
Pelvis Plug (struck side)					16450	SACO	05/23/2022
Pelvis Plug (non-struck side)					16429	SACO	05/23/2022

Table 2 – Vehicle Instrumentation

		Serial Number	Manufacturer	Calibration Date
Vehicle Center of Gravity	X	T42702	Endevco	04/08/2025
Vehicle Center of Gravity	Y	T43931	Endevco	02/07/2025
Vehicle Center of Gravity	Z	T45522	Endevco	03/13/2025
Left Floor Sill	Y	T45275	Endevco	02/05/2025
A-Pillar Sill	Y	T44641	Endevco	06/12/2025
A-Pillar Low	Y	T41125	Endevco	06/25/2025
A-Pillar Mid	Y	T41183	Endevco	06/25/2025
B-Pillar Sill	Y	T43732	Endevco	04/10/2025
B-Pillar Low	Y	T44521	Endevco	04/17/2025
B-Pillar Mid	Y	T43499	Endevco	02/16/2025
Driver Seat	Y	T43494	Endevco	06/11/2025
Engine Top	X	T45076	Endevco	04/11/2025
Engine Top	Y	A383118	MSI	06/25/2025
Firewall	Y	T42787	Endevco	05/13/2025
Right Roof	Y	T43508	Endevco	05/14/2025
Right Floor Sill	Y	T45273	Endevco	02/05/2025
Rear Floorpan	X	T39078	Endevco	06/25/2025
Rear Floorpan	Y	T43460	Endevco	06/25/2025

Table 3 – Pole Instrumentation

	Serial Number	Manufacturer	Calibration Date
Load Cell 1	DG6277	FTSS	07/30/2018
Load Cell 2	DG6278	FTSS	07/30/2018
Load Cell 3	DG6279	FTSS	07/30/2018
Load Cell 4	DG6280	FTSS	07/30/2018
Load Cell 5	DG6281	FTSS	07/30/2018
Load Cell 6	DG6283	FTSS	07/30/2018
Load Cell 7	DG6284	FTSS	07/30/2018
Load Cell 8	DG6582	FTSS	07/30/2018