

**REPORT NUMBER: NCAP-MGA-25-029**

**NEW CAR ASSESSMENT PROGRAM (NCAP)  
Frontal Barrier Impact Test**

**VOLKSWAGEN AG  
2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
NHTSA No.: O20255800**

**MGA RESEARCH CORPORATION  
5000 Warren Road  
Burlington, WI 53105**



**Test Date: September 4, 2025**


**Final Report Date: May 26, 2026**


**FINAL REPORT**

**U.S. DEPARTMENT OF TRANSPORTATION  
National Highway Traffic Safety Administration  
Office of Crashworthiness Standards  
Mail Code: NRM-110  
1200 New Jersey Ave, SE  
Washington, DC 20590**

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof.

If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by:   
Ben Fischer, Program Manager

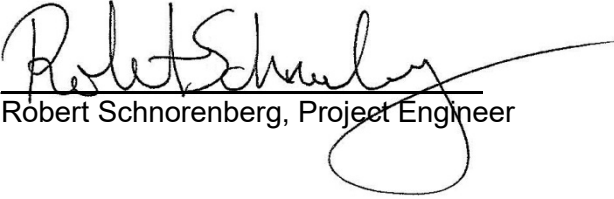Approved by:   
Robert Schnorenberg, Project Engineer

Approval Date: May 26, 2026

FINAL REPORT ACCEPTANCE BY OCWS:

\_\_\_\_\_  
Division Chief, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date: \_\_\_\_\_

\_\_\_\_\_  
COTR, New Car Assessment Program  
NHTSA, Office of Crashworthiness Standards

Date: \_\_\_\_\_



## TECHNICAL REPORT DOCUMENTATION PAGE

| <b>1. Report No.</b><br>NCAP-MGA-25-029                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <b>2. Government Accession No.</b>                         | <b>3. Recipient's Catalog No.</b>                                                                      |                                                                                                                                                                                                                                |               |          |                         |       |            |  |               |  |           |        |           |        |                                           |  |     |         |     |         |                           |    |    |        |    |        |     |  |   |       |   |       |              |   |      |          |      |         |                  |   |      |         |      |         |                  |   |       |          |      |          |                   |   |       |          |      |          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------|-------------------------|-------|------------|--|---------------|--|-----------|--------|-----------|--------|-------------------------------------------|--|-----|---------|-----|---------|---------------------------|----|----|--------|----|--------|-----|--|---|-------|---|-------|--------------|---|------|----------|------|---------|------------------|---|------|---------|------|---------|------------------|---|-------|----------|------|----------|-------------------|---|-------|----------|------|----------|
| <b>4. Title and Subtitle</b><br>Final Report of New Car Assessment Program Frontal Impact Testing and FMVSS No. 305 Indicant Testing of a 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV, NHTSA No.: O20255800                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                            | <b>5. Report Date</b><br>May 26, 2026                                                                  |                                                                                                                                                                                                                                |               |          |                         |       |            |  |               |  |           |        |           |        |                                           |  |     |         |     |         |                           |    |    |        |    |        |     |  |   |       |   |       |              |   |      |          |      |         |                  |   |      |         |      |         |                  |   |       |          |      |          |                   |   |       |          |      |          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                            | <b>6. Performing Organization Code</b><br>MGA                                                          |                                                                                                                                                                                                                                |               |          |                         |       |            |  |               |  |           |        |           |        |                                           |  |     |         |     |         |                           |    |    |        |    |        |     |  |   |       |   |       |              |   |      |          |      |         |                  |   |      |         |      |         |                  |   |       |          |      |          |                   |   |       |          |      |          |
| <b>7. Author(s)</b><br>Ben Fischer, Program Manager                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                            | <b>8. Performing Organization Report No.</b><br>NCAP-MGA-25-029                                        |                                                                                                                                                                                                                                |               |          |                         |       |            |  |               |  |           |        |           |        |                                           |  |     |         |     |         |                           |    |    |        |    |        |     |  |   |       |   |       |              |   |      |          |      |         |                  |   |      |         |      |         |                  |   |       |          |      |          |                   |   |       |          |      |          |
| <b>9. Performing Organization Name and Address</b><br>MGA Research Corporation<br>5000 Warren Road<br>Burlington, WI 53105                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                            | <b>10. Work Unit No.</b>                                                                               |                                                                                                                                                                                                                                |               |          |                         |       |            |  |               |  |           |        |           |        |                                           |  |     |         |     |         |                           |    |    |        |    |        |     |  |   |       |   |       |              |   |      |          |      |         |                  |   |      |         |      |         |                  |   |       |          |      |          |                   |   |       |          |      |          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                            | <b>11. Contract or Grant No.</b><br>693JJ919D000006                                                    |                                                                                                                                                                                                                                |               |          |                         |       |            |  |               |  |           |        |           |        |                                           |  |     |         |     |         |                           |    |    |        |    |        |     |  |   |       |   |       |              |   |      |          |      |         |                  |   |      |         |      |         |                  |   |       |          |      |          |                   |   |       |          |      |          |
| <b>12. Sponsoring Agency Name and Address</b><br>U.S. Department of Transportation<br>National Highway Traffic Safety Administration<br>Office of Crashworthiness Standards (NRM-110)<br>1200 New Jersey Ave, SE<br>Washington, D.C. 20590                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                            | <b>13. Type of Report and Period Covered</b><br>Final Test Report<br>September 4, 2025 to May 26, 2026 |                                                                                                                                                                                                                                |               |          |                         |       |            |  |               |  |           |        |           |        |                                           |  |     |         |     |         |                           |    |    |        |    |        |     |  |   |       |   |       |              |   |      |          |      |         |                  |   |      |         |      |         |                  |   |       |          |      |          |                   |   |       |          |      |          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                            | <b>14. Sponsoring Agency Code</b><br>NRM-110                                                           |                                                                                                                                                                                                                                |               |          |                         |       |            |  |               |  |           |        |           |        |                                           |  |     |         |     |         |                           |    |    |        |    |        |     |  |   |       |   |       |              |   |      |          |      |         |                  |   |      |         |      |         |                  |   |       |          |      |          |                   |   |       |          |      |          |
| <b>15. Supplementary Notes</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                            |                                                                                                        |                                                                                                                                                                                                                                |               |          |                         |       |            |  |               |  |           |        |           |        |                                           |  |     |         |     |         |                           |    |    |        |    |        |     |  |   |       |   |       |              |   |      |          |      |         |                  |   |      |         |      |         |                  |   |       |          |      |          |                   |   |       |          |      |          |
| <b>16. Abstract</b><br>A 56.3 km/h NCAP Full Frontal Rigid Barrier Impact Test was conducted on a 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV in accordance with the specifications of the Office of Crashworthiness Standards Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing. The test was conducted at MGA Research Corporation in Burlington, Wisconsin on September 4, 2025.<br><br>The impact velocity of the vehicle was 56.21 km/h and the ambient temperature at the barrier face at the time of impact was 21.6°C. The target vehicle post-test maximum crush was 402 mm located to the right of the vehicle centerline. The test vehicle's performance was as follows: <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th rowspan="2">Measurement Description</th> <th rowspan="2">Units</th> <th colspan="2">Driver ATD</th> <th colspan="2">Passenger ATD</th> </tr> <tr> <th>Threshold</th> <th>Result</th> <th>Threshold</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC<sub>15</sub>)</td> <td></td> <td>700</td> <td>150.694</td> <td>700</td> <td>402.824</td> </tr> <tr> <td>Maximum Chest Compression</td> <td>mm</td> <td>63</td> <td>27.132</td> <td>52</td> <td>16.401</td> </tr> <tr> <td>Nij</td> <td></td> <td>1</td> <td>0.241</td> <td>1</td> <td>0.270</td> </tr> <tr> <td>Neck Tension</td> <td>N</td> <td>4170</td> <td>1425.769</td> <td>2620</td> <td>487.674</td> </tr> <tr> <td>Neck Compression</td> <td>N</td> <td>4000</td> <td>121.480</td> <td>2520</td> <td>833.305</td> </tr> <tr> <td>Left Femur Force</td> <td>N</td> <td>10008</td> <td>1610.790</td> <td>6805</td> <td>1586.233</td> </tr> <tr> <td>Right Femur Force</td> <td>N</td> <td>10008</td> <td>1178.447</td> <td>6805</td> <td>1718.273</td> </tr> </tbody> </table> |                                                            |                                                                                                        |                                                                                                                                                                                                                                |               |          | Measurement Description | Units | Driver ATD |  | Passenger ATD |  | Threshold | Result | Threshold | Result | Head Injury Criteria (HIC <sub>15</sub> ) |  | 700 | 150.694 | 700 | 402.824 | Maximum Chest Compression | mm | 63 | 27.132 | 52 | 16.401 | Nij |  | 1 | 0.241 | 1 | 0.270 | Neck Tension | N | 4170 | 1425.769 | 2620 | 487.674 | Neck Compression | N | 4000 | 121.480 | 2520 | 833.305 | Left Femur Force | N | 10008 | 1610.790 | 6805 | 1586.233 | Right Femur Force | N | 10008 | 1178.447 | 6805 | 1718.273 |
| Measurement Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Units                                                      | Driver ATD                                                                                             |                                                                                                                                                                                                                                | Passenger ATD |          |                         |       |            |  |               |  |           |        |           |        |                                           |  |     |         |     |         |                           |    |    |        |    |        |     |  |   |       |   |       |              |   |      |          |      |         |                  |   |      |         |      |         |                  |   |       |          |      |          |                   |   |       |          |      |          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                            | Threshold                                                                                              | Result                                                                                                                                                                                                                         | Threshold     | Result   |                         |       |            |  |               |  |           |        |           |        |                                           |  |     |         |     |         |                           |    |    |        |    |        |     |  |   |       |   |       |              |   |      |          |      |         |                  |   |      |         |      |         |                  |   |       |          |      |          |                   |   |       |          |      |          |
| Head Injury Criteria (HIC <sub>15</sub> )                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                            | 700                                                                                                    | 150.694                                                                                                                                                                                                                        | 700           | 402.824  |                         |       |            |  |               |  |           |        |           |        |                                           |  |     |         |     |         |                           |    |    |        |    |        |     |  |   |       |   |       |              |   |      |          |      |         |                  |   |      |         |      |         |                  |   |       |          |      |          |                   |   |       |          |      |          |
| Maximum Chest Compression                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | mm                                                         | 63                                                                                                     | 27.132                                                                                                                                                                                                                         | 52            | 16.401   |                         |       |            |  |               |  |           |        |           |        |                                           |  |     |         |     |         |                           |    |    |        |    |        |     |  |   |       |   |       |              |   |      |          |      |         |                  |   |      |         |      |         |                  |   |       |          |      |          |                   |   |       |          |      |          |
| Nij                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                            | 1                                                                                                      | 0.241                                                                                                                                                                                                                          | 1             | 0.270    |                         |       |            |  |               |  |           |        |           |        |                                           |  |     |         |     |         |                           |    |    |        |    |        |     |  |   |       |   |       |              |   |      |          |      |         |                  |   |      |         |      |         |                  |   |       |          |      |          |                   |   |       |          |      |          |
| Neck Tension                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | N                                                          | 4170                                                                                                   | 1425.769                                                                                                                                                                                                                       | 2620          | 487.674  |                         |       |            |  |               |  |           |        |           |        |                                           |  |     |         |     |         |                           |    |    |        |    |        |     |  |   |       |   |       |              |   |      |          |      |         |                  |   |      |         |      |         |                  |   |       |          |      |          |                   |   |       |          |      |          |
| Neck Compression                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | N                                                          | 4000                                                                                                   | 121.480                                                                                                                                                                                                                        | 2520          | 833.305  |                         |       |            |  |               |  |           |        |           |        |                                           |  |     |         |     |         |                           |    |    |        |    |        |     |  |   |       |   |       |              |   |      |          |      |         |                  |   |      |         |      |         |                  |   |       |          |      |          |                   |   |       |          |      |          |
| Left Femur Force                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | N                                                          | 10008                                                                                                  | 1610.790                                                                                                                                                                                                                       | 6805          | 1586.233 |                         |       |            |  |               |  |           |        |           |        |                                           |  |     |         |     |         |                           |    |    |        |    |        |     |  |   |       |   |       |              |   |      |          |      |         |                  |   |      |         |      |         |                  |   |       |          |      |          |                   |   |       |          |      |          |
| Right Femur Force                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | N                                                          | 10008                                                                                                  | 1178.447                                                                                                                                                                                                                       | 6805          | 1718.273 |                         |       |            |  |               |  |           |        |           |        |                                           |  |     |         |     |         |                           |    |    |        |    |        |     |  |   |       |   |       |              |   |      |          |      |         |                  |   |      |         |      |         |                  |   |       |          |      |          |                   |   |       |          |      |          |
| <b>17. Key Words</b><br><br>56.3 km/h (35 mph) Full Frontal Rigid Barrier Impact Test<br>New Car Assessment Program (NCAP)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                            |                                                                                                        | <b>18. Distribution Statement</b><br>Copies of this report are available from:<br>National Highway Traffic Safety Administration<br>Technical Information Services Division<br>1200 New Jersey Ave, SE<br>Washington, DC 20590 |               |          |                         |       |            |  |               |  |           |        |           |        |                                           |  |     |         |     |         |                           |    |    |        |    |        |     |  |   |       |   |       |              |   |      |          |      |         |                  |   |      |         |      |         |                  |   |       |          |      |          |                   |   |       |          |      |          |
| <b>19. Security Classification of Report</b><br>Unclassified                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <b>20. Security Classification of Page</b><br>Unclassified | <b>21. No. of Pages</b><br>199                                                                         | <b>22. Price</b>                                                                                                                                                                                                               |               |          |                         |       |            |  |               |  |           |        |           |        |                                           |  |     |         |     |         |                           |    |    |        |    |        |     |  |   |       |   |       |              |   |      |          |      |         |                  |   |      |         |      |         |                  |   |       |          |      |          |                   |   |       |          |      |          |

## TABLE OF CONTENTS

| <u>Section</u>        |                                                                                                  | <u>Page No.</u> |
|-----------------------|--------------------------------------------------------------------------------------------------|-----------------|
| 1                     | Purpose and Summary of Test                                                                      | 1               |
| 2                     | Occupant and Vehicle Information / Data Sheets                                                   | 3               |
| <br>                  |                                                                                                  |                 |
| <u>Data Sheet No.</u> |                                                                                                  | <u>Page No.</u> |
| 1                     | General Test and Vehicle Parameter Data                                                          | 4               |
| 2                     | Seat Adjustment, Fuel System, and Steering Wheel Data                                            | 8               |
| 3                     | Dummy Longitudinal Clearance Dimensions                                                          | 10              |
| 4                     | Dummy Lateral Clearance Dimensions                                                               | 11              |
| 5                     | Seat Belt Positioning Data                                                                       | 12              |
| 6                     | High-Speed Camera Locations and Data                                                             | 13              |
| 7                     | Vehicle Accelerometer Locations                                                                  | 15              |
| 8                     | Photographic Reference Target Locations                                                          | 16              |
| 9                     | Load Cell Locations on Fixed Barrier                                                             | 17              |
| 10                    | Test Vehicle Summary of Results                                                                  | 18              |
| 11                    | Post-Test Observations                                                                           | 19              |
| 12                    | Vehicle Profile Measurements                                                                     | 20              |
| 13                    | Accident Investigation Division Data                                                             | 22              |
| 14                    | Vehicle Intrusion Measurements                                                                   | 23              |
| 15                    | Summary of Indicant FMVSS No. 212 and FMVSS No. 219 (Partial) Data                               | 25              |
| 16                    | FMVSS No. 301 Barrier Impact and Static Rollover Results                                         | 26              |
| 17                    | Dummy/Vehicle Temperature Stabilization Data                                                     | 28              |
| 305-1                 | General Test and Vehicle Parameter Data for Indicant FMVSS No. 305 Testing                       | 29              |
| 305-2                 | Pre-Impact Data for Indicant FMVSS No. 305 Testing                                               | 30              |
| 305-3                 | Pre-Impact Electrical Isolation Measurements and Calculations for Indicant FMVSS No. 305 Testing | 31              |
| 305-4                 | Post-Impact Data for Indicant FMVSS No. 305 Testing                                              | 33              |
| 305-5                 | Static Rollover Test Data for Indicant FMVSS No. 305 Testing                                     | 36              |
| <br>                  |                                                                                                  |                 |
| <u>Appendix</u>       |                                                                                                  |                 |
| A                     | Photographs                                                                                      | A               |
| B                     | Dummy Response Data Traces                                                                       | B               |
| C                     | Dummy Qualification and Performance Verification                                                 | C               |
| D                     | Test Equipment and Instrumentation Calibration                                                   | D               |

## **SECTION 1 PURPOSE AND SUMMARY OF TEST**

### **PURPOSE**

This 56.3 km/h frontal barrier impact test is part of the Vehicle Barrier Impact Testing Program sponsored by the National Highway Traffic Safety Administration (NHTSA) under contract number 693JJ919D000006. The purpose of this test was to obtain vehicle crashworthiness and occupant restraint system performance data for consumer information purposes.

The 56.3 km/h frontal barrier impact was conducted in accordance with the Office of Crashworthiness Standards Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing, dated May 2018.

### **SUMMARY**

A load cell barrier consisting of 176 load cells was impacted by a 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV at a velocity of 56.21 km/h. The test was performed at MGA Research Corporation on September 4, 2025. Pre-test and post-test photographs of the vehicle and dummies can be found in Appendix A.

Two (2) real-time cameras and sixteen (16) high-speed cameras were used to document the frontal barrier impact event. Camera locations and other pertinent camera information can be found in this report.

One Part 572E 50<sup>th</sup> percentile male anthropomorphic test device (ATD), was placed in the driver seating position and one Part 572O 5<sup>th</sup> percentile female test device (ATD) was placed in the right-front passenger seating position according to dummy placement instructions specified in the Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing.

Both ATDs were fully instrumented with head, chest and pelvis tri-axial accelerometers, chest displacement potentiometers, upper neck transducers, right/left femur load cells, and lower leg instrumentation. Seat belt load cells were installed on the driver's and passenger's lap and shoulder belts to measure dummy torso and pelvic section loading.

The driver (position 1) ATD (Serial No. 064) and the right-front passenger (position 2) ATD (Serial No. 142) were qualified previous to this test. Certification details, along with instrumentation calibration data, are found in Appendix C of this report.

The 281 channels of data were recorded on a data acquisition system. Appendix B contains the dummy response data traces.

There was 100 percent windshield retention and no intrusion into the protected zone of the windshield during the event. There was no battery electrolyte leakage and no loss of high-voltage battery isolation after the event or during any phase of the static rollover.

The maximum static crush of the vehicle was 402 mm located to the right of the vehicle centerline and both the driver and passenger side doors remained closed during the impact event and were operable after the impact.

The driver's visible contact points were as follows: The driver's head contacted the airbag. The driver's knees contacted the knee bolster and steering column shroud.

The passenger's visible contact points were as follows: The passenger's head contacted the airbag. The passenger's head also contacted the headrest. The passenger's knees contacted the glove box.

The occupant data is summarized below:

| <b>ATD position</b>          | <b>HIC<sub>15</sub></b> | <b>Nij</b> | <b>Neck<br/>Tension<br/>(N)</b> | <b>Neck<br/>Comp.<br/>(N)</b> | <b>3ms<br/>Chest<br/>Clip (g)</b> | <b>Chest<br/>Disp.<br/>(mm)</b> | <b>Left<br/>Femur<br/>(N)</b> | <b>Right<br/>Femur<br/>(N)</b> |
|------------------------------|-------------------------|------------|---------------------------------|-------------------------------|-----------------------------------|---------------------------------|-------------------------------|--------------------------------|
| Driver (50 <sup>th</sup> )   | 150.694                 | 0.241      | 1425.769                        | 121.480                       | 38.531                            | 27.132                          | 1610.790                      | 1178.447                       |
| Passenger (5 <sup>th</sup> ) | 402.824                 | 0.270      | 487.674                         | 833.305                       | 42.373                            | 16.401                          | 1586.233                      | 1718.273                       |

The test data can be found on the NHTSA website at [www.nhtsa.gov](http://www.nhtsa.gov)

## **TEST NOTES**

None.

MGA does not endorse or certify products. The manufacturer's name appears solely for identification purposes.

**SECTION 2**  
**OCCUPANT AND VEHICLE INFORMATION / DATA SHEETS**

**DATA SHEET NO. 1**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025

**TEST VEHICLE INFORMATION AND OPTIONS**

|                             |                          |                                 |     |
|-----------------------------|--------------------------|---------------------------------|-----|
| NHTSA No.                   | O20255800                | Traction Control System (TCS)   | Yes |
| Model Year                  | 2025                     | Power Steering                  | Yes |
| Make                        | Volkswagen               | Power Window Auto-Reverse       | Yes |
| Model                       | ID.Buzz 1st Edition      | Driver Frontal Airbag           | Yes |
| Body Style                  | 5-Door SUV               | Driver Curtain Airbag           | Yes |
| VIN                         | WVG6YVEB8SH020085        | Driver Head/Torso Airbag        | No  |
| Body Color                  | Mahi Green & Candy White | Driver Torso Airbag             | No  |
| Odometer (km/mi)            | 245 km / 152 mi          | Driver Torso/Pelvis Airbag      | Yes |
| Engine Displacement (L)     |                          | Driver Pelvis Airbag            | No  |
| Type/No. Cylinders          | Electric                 | Driver Knee Airbag              | No  |
| Engine Placement            | Lateral                  | Front Pass. Frontal Airbag      | Yes |
| Transmission Type           | NA                       | Front Pass. Curtain Airbag      | Yes |
| Transmission Speeds         |                          | Front Pass. Head/Torso Airbag   | No  |
| Overdrive                   | No                       | Front Pass. Torso Airbag        | No  |
| Final Drive                 | AWD                      | Front Pass. Torso/Pelvis Airbag | Yes |
| Roof Rack                   | No                       | Front Pass. Pelvis Airbag       | No  |
| Sunroof/T-Top               | Yes                      | Front Pass. Knee Airbag         | No  |
| Running Boards              | No                       | Driver Pretensioner             | Yes |
| Tilt Steering Wheel         | Yes                      | Driver Load Limiter             | Yes |
| Power Seats                 | Yes                      | Front Pass. Pretensioner        | Yes |
| Anti-Lock Brakes (ABS)      | Yes                      | Front Pass. Load Limiter        | Yes |
| Automatic Door Locks (ADLs) | Yes                      | Other                           | N/A |

|                                                                            |    |
|----------------------------------------------------------------------------|----|
| Does owner's manual provide instructions to turn off automatic door locks? | No |
|----------------------------------------------------------------------------|----|

**DATA FROM CERTIFICATION LABEL**

|                     |               |                 |      |
|---------------------|---------------|-----------------|------|
| Manufactured By     | VOLKSWAGEN AG | GVWR (kg)       | 3360 |
| Date of Manufacture | 11/24         | GAWR Front (kg) | 1600 |
|                     |               | GAWR Rear (kg)  | 1810 |

**VEHICLE SEATING AND WEIGHT CAPACITY DATA**


| Measured Parameter                | Front  | Rear        | Third       | Total |
|-----------------------------------|--------|-------------|-------------|-------|
| Type of Seats                     | Bucket | Split Bench | Split Bench |       |
| Designated Seating Capacity (DSC) | 2      | 2           | 2           | 6     |
| Capacity Weight (VCW) (kg)        |        |             |             | 430   |
| Cargo Weight (RCLW) (kg)          |        |             |             | 22    |

**DATA SHEET NO. 1 (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025

**VEHICLE TIRE INFORMATION**

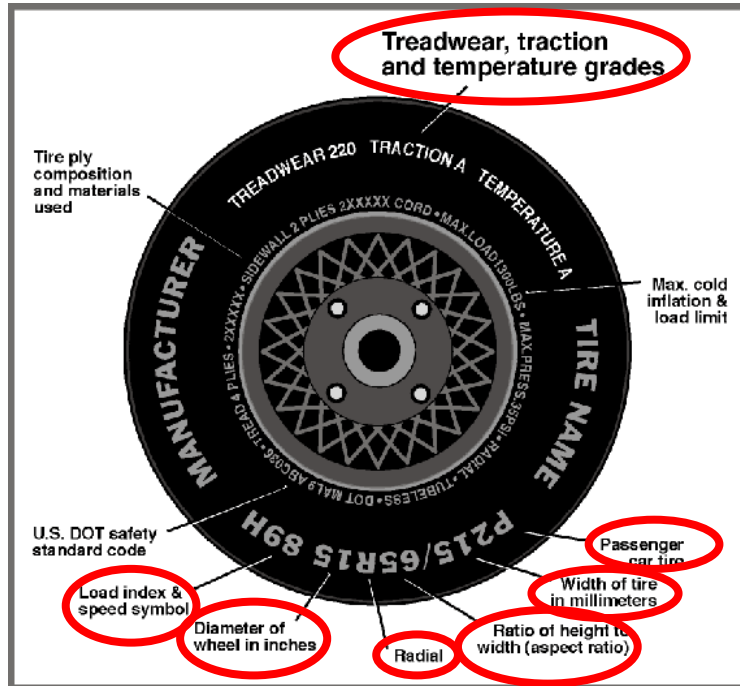

| Measured Parameter       | Front                             | Rear                              |
|--------------------------|-----------------------------------|-----------------------------------|
| Max. Tire Pressure (kPa) | 350                               | 350                               |
| Cold Pressure (kPa)      | 290                               | 300                               |
| Recommended Tire Size    | HL 235/50R20 XL                   | HL 265/45R20 XL                   |
| Tire Size on Vehicle     | 235/50R20                         | 265/45R20                         |
| Tire Manufacturer        | Continental                       | Continental                       |
| Tire Model               | ProContact TX10                   | ProContact TX10                   |
| Treadwear                | 540                               | 540                               |
| Traction                 | A                                 | A                                 |
| Temperature Grade        | B                                 | B                                 |
| Tire Plies Sidewall      | 2 Polyester                       | 2 Polyester                       |
| Tire Plies Body          | 1 Polyester, 2 Steel, 1 Polyamide | 1 Polyester, 2 Steel, 1 Polyamide |
| Load Index/Speed Symbol  | 107T                              | 111T                              |
| Tire Material            | Rubber                            | Rubber                            |
| DOT Safety Code Left     | 1HW 0333NF 4524                   | 1HW 0333NW 4624                   |
| DOT Safety Code Right    | 1HW 0333NF 4524                   | 1HW 0333NW 4624                   |

**DATA SHEET NO. 1 (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025

**TEST VEHICLE WEIGHTS**

|        | Units | As Delivered (UVW) |        |        | As Tested (ATW) |        |        |
|--------|-------|--------------------|--------|--------|-----------------|--------|--------|
|        |       | Front              | Rear   | Total  | Front           | Rear   | Total  |
| Left   | kg    | 720.0              | 683.5  |        | 770.0           | 717.5  |        |
| Right  | kg    | 684.0              | 710.0  |        | 728.5           | 739.0  |        |
| Ratio  | %     | 50.2%              | 49.8%  |        | 50.7%           | 49.3%  |        |
| Totals | kg    | 1404.0             | 1393.5 | 2797.5 | 1498.5          | 1456.5 | 2955.0 |

**TARGET TEST WEIGHT CALCULATION**

| Measured Parameter                           | Units | Value  |
|----------------------------------------------|-------|--------|
| Total Delivered Weight (UVW)                 | kg    | 2797.5 |
| Weight of 1 P572E ATD & 1 P572O ATD          | kg    | 141    |
| Rated Cargo/Luggage Weight (RCLW)            | kg    | 22     |
| Calculated Test Vehicle Target Weight (TVTW) | kg    | 2960.5 |

**TEST VEHICLE ATTITUDES AND CG**

|              | Units | LF  | RF  | LR  | RR  | CG (aft of front axle) |
|--------------|-------|-----|-----|-----|-----|------------------------|
| As Delivered | mm    | 810 | 807 | 812 | 814 | 1617                   |
| As Tested    | mm    | 798 | 794 | 805 | 809 | 1600                   |
| Post Test    | mm    | 864 | 805 | 832 | 787 |                        |

**GENERAL TEST VEHICLE DATA**

| Measurement Description                 | Units | Value |
|-----------------------------------------|-------|-------|
| Total Vehicle Wheel Base                | mm    | 3246  |
| Total Vehicle Length at Left Side       | mm    | 4801  |
| Total Vehicle Length at Centerline      | mm    | 4941  |
| Total Vehicle Length at Right Side      | mm    | 4802  |
| Weight of Ballast in Cargo Area         | kg    | 7     |
| Weight of Vehicle Components Removed    | kg    | 71    |
| Amount of Stoddard Solvent in Fuel Tank | L     |       |

List of components removed to meet test weight: 3rd row seats.

List of components removed for instrumentation, data box, and equipment installation: Cargo area carpet/trim/divider, jack and tools.



**DATA SHEET NO. 1 (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
Test Date: 9/4/2025

**TARGET VEHICLE STRUCTURAL MEASUREMENT**

|    | Elements                              | Pre-Test (mm) |
|----|---------------------------------------|---------------|
| 1  | Total Length                          | 4941          |
| 2  | Total Width                           | 1929          |
| 3  | Bumper Top Height                     | 555           |
| 4  | Bumper Bottom Height                  | 406           |
| 5  | Longitudinal Member Top Height        | 553           |
| 6  | Distance between Longitudinal Members | 833           |
| 7  | Longitudinal Member Width             | 90            |
| 8  | Engine Top Height                     | 846           |
| 9  | Engine Bottom Height                  | 253           |
| 10 | Engine and Gearbox Width              | 446           |
| 11 | Front Bumper-Engine Distance          | 297           |
| 12 | Front Shock Absorber Fixing Height    | 750           |
| 13 | Bonnet Leading Edge Height            | 1085          |
| 14 | Front Shock Absorber Fixing Width     | 1553          |
| 15 | Front Bumper – Front Axle Distance    | 806           |
| 16 | Front Axle – A-Pillar Distance        | 518           |
| 17 | A-Pillar – B-Pillar Distance          | 968           |
| 18 | B-Pillar – Rear Axle Distance         | 1760          |
| 19 | B-Pillar – C-Pillar Distance          | 1370          |
| 20 | Roof Sill Bottom Height               | 1732          |
| 21 | Roof Sill Top Height                  | 1845          |
| 22 | Floor Sill Bottom Height              | 206           |
| 23 | Floor Sill Top Height                 | 412           |

**DATA SHEET NO. 2**  
**SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA**


Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025

**NOMINAL DESIGN RIDING POSITION**

The driver seat back is positioned as close as possible to the manufacturer's design angle. For the passenger seat back, seat back is adjusted following Appendix F, "Driver & Passenger Dummy Seating & Positioning Procedures" in the NCAP Test Procedure dated May 2018.

|                           | Degrees            |
|---------------------------|--------------------|
| Driver Seat Back Angle    | 17.0° on seat back |
| Passenger Seat Back Angle | 11.6° on seat back |

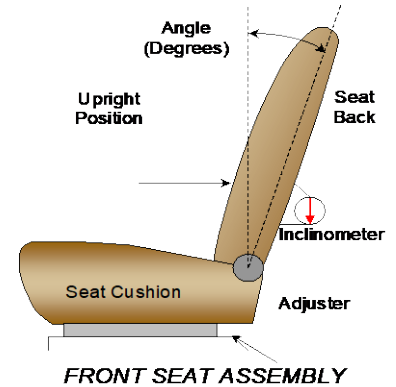

**SEAT FORE/AFT POSITIONS**


The driver and passenger seat fore/aft positions are adjusted following Appendix F, "Driver & Passenger Dummy Seating & Positioning Procedures" in the NCAP Test Procedure dated May 2018.

|                | Total Fore/Aft Travel | Placed in Position # |
|----------------|-----------------------|----------------------|
| Driver Seat    | 322 mm                | 161 mm               |
| Passenger Seat | 250 mm                | 0 mm                 |

**SEAT BELT UPPER ANCHORAGES**

The seat belt upper anchorages are set following the manufacturer's specified position as listed in Form 1.

|                | Total # of Positions | Placed in Position # |
|----------------|----------------------|----------------------|
| Driver Seat    | 4 (1st as 1)         | 0 (1st as 0)         |
| Passenger Seat | 4 (1st as 1)         | 0 (1st as 0)         |

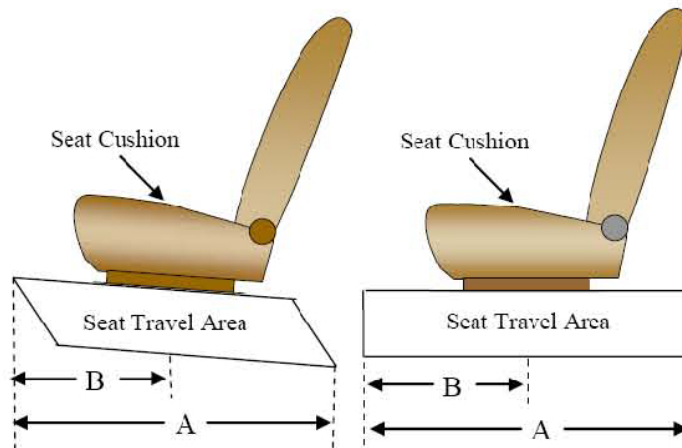

**DATA SHEET NO. 2 (CONTINUED)**  
**SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test


NHTSA No.: O20255800  
 Test Date: 9/4/2025

**FUEL TANK CAPACITY DATA**

|                                    | Liters |
|------------------------------------|--------|
| Usable Capacity of "Standard Tank" |        |
| Usable Capacity of "Optional Tank" |        |
| 92-94% of Usable Capacity          |        |
| Actual Amount of Solvent used      |        |
| 1/3 of Usable Capacity             |        |

**FUEL PUMP**


Electric vehicle.

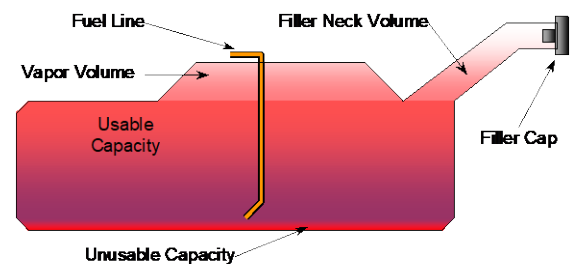

VEHICLE FUEL TANK ASSEMBLY

**STEERING COLUMN ADJUSTMENT**

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes when moved through its full range of motion. An aluminum plate is placed across the rim of the steering wheel, an inclinometer is placed on the plate and the angle is measured.

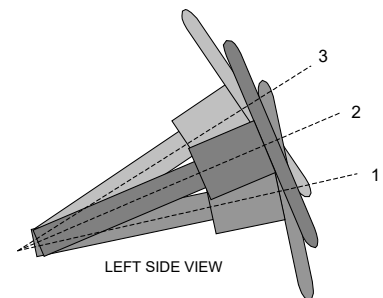

STEERING COLUMN ASSEMBLY


**STEERING COLUMN POSITION**

|                                   | Degrees | Fore/Aft Position (mm) |
|-----------------------------------|---------|------------------------|
| Lowermost Position 1              | 63.3    |                        |
| Geometric Center Position 2       | 60.6    |                        |
| Uppermost Position 3              | 57.9    |                        |
| Telescoping Steering Wheel Travel |         | 45                     |
| Test Position                     | 60.6    | 23                     |

**DATA SHEET NO. 3**  
**DUMMY LONGITUDINAL CLEARANCE DIMENSIONS**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025

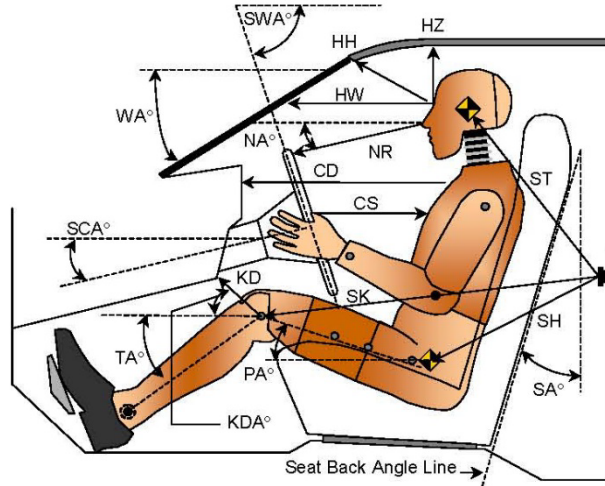


**LEFT SIDE VIEW**

| Code | Measurement Description | Driver      |           | Passenger   |           |
|------|-------------------------|-------------|-----------|-------------|-----------|
|      |                         | Length (mm) | Angle (°) | Length (mm) | Angle (°) |
| WA°  | Windshield Angle        |             | 34.5      |             |           |
| SWA° | Steering Wheel Angle    |             | 60.6      |             |           |
| SCA° | Steering Column Angle   |             | 29.4      |             |           |
| SA°  | Seat Back Angle         |             | 17.0      |             | 11.6      |
| HZ   | Head to Roof (Z)        | 303         | 90        | 343         | 90        |
| HH   | Head to Header          | 740         | 14.1      | 634         | 20.6      |
| HW   | Head to Windshield      | 1000        | 0         | 937         | 0         |
| NR   | Nose to Rim             | 399         | 10.4      |             |           |
| CD   | Chest to Dash           | 528         |           | 425         |           |
| CS   | Chest to Steering Hub   | 317         | 3.3       |             |           |
| RA   | Rim to Abdomen          | 184         | 0         |             |           |
| KDL  | Left Knee to Dash       | 149         | 31.8      | 74          | 48.4      |
| KDR  | Right Knee to Dash      | 129         | 46.6      | 73          | 30.4      |
| PA°  | Pelvic Angle            |             | 23.5      |             | 21.6      |
| TA°  | Tibia Angle             |             | 44.8      |             | 64.6      |
| SK   | Striker to Knee         | 612         | 91.9      | 698         | 90.8      |
| ST   | Striker to Head         | 587         | 12.5      | 584         | 24.4      |
| SH   | Striker to H-Point      | 252         | 110.4     | 368         | 95.4      |

**DATA SHEET NO. 4**  
**DUMMY LATERAL CLEARANCE DIMENSIONS**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
Test Date: 9/4/2025

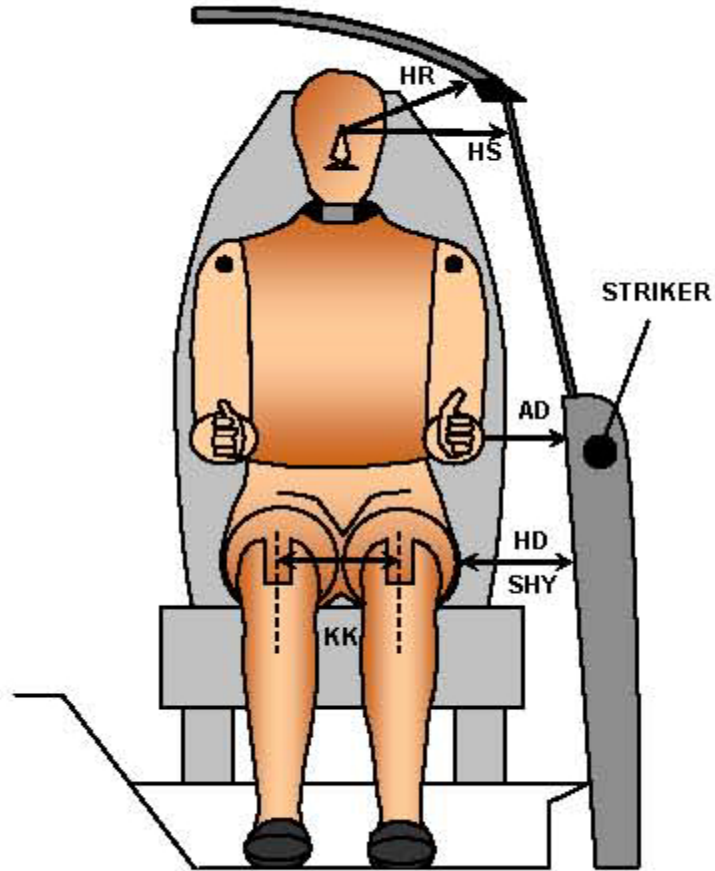


**FRONT VIEW OF DUMMY**

| Code | Measurement Description          | Units | Driver | Passenger |
|------|----------------------------------|-------|--------|-----------|
| AD   | Arm to Door                      | mm    | 90     | 119       |
| HD   | H-Point to Door                  | mm    | 157    | 266       |
| HR   | Head to Side Header              | mm    | 342    | 321       |
| HS   | Head to Side Window              | mm    | 399    | 404       |
| KK   | Knee to Knee                     | mm    | 354    | 230       |
| SHY  | Striker to H-Point (Y Direction) | mm    | 268    | 299       |
| AA   | Ankle to Ankle                   | mm    | 336    | 193       |

## DATA SHEET NO. 5 SEAT BELT POSITIONING DATA

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025

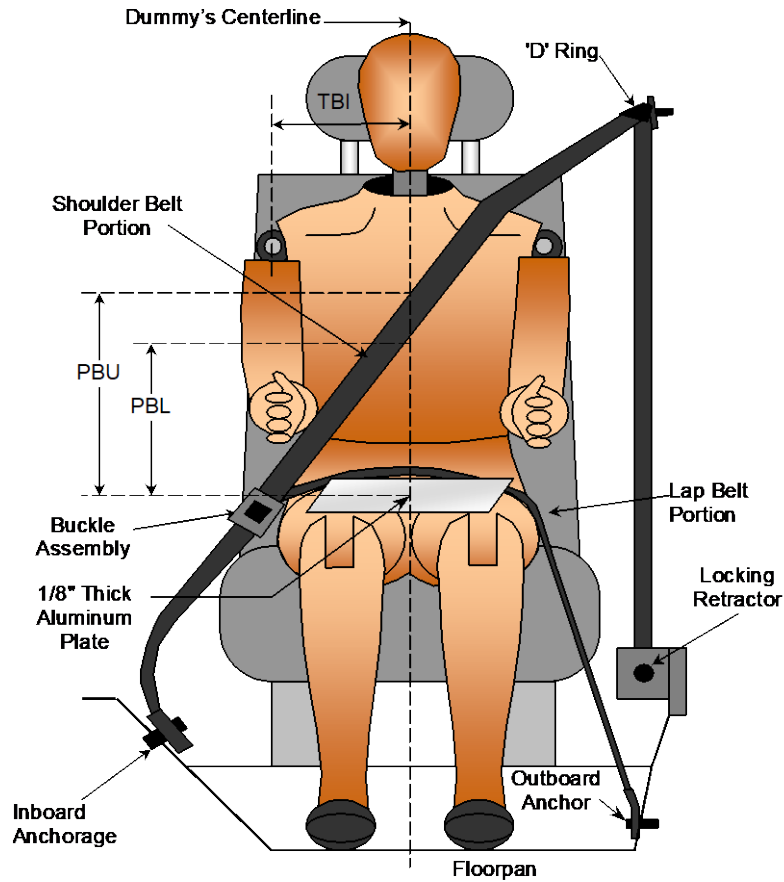

**FRONT VIEW OF DUMMY**

### SEAT BELT POSITIONING MEASUREMENTS

| Measurement Description                           | Units | Driver | Passenger |
|---------------------------------------------------|-------|--------|-----------|
| PBU - Top surface of reference to belt upper edge | mm    | 370    | 270       |
| PBL - Top surface of reference to belt lower edge | mm    | 285    | 180       |

### BELT LENGTH DATA


| Measurement Description                          | Units | Driver | Passenger |
|--------------------------------------------------|-------|--------|-----------|
| Shoulder Belt Length as measured on ATD          | mm    | 930    | 960       |
| Lap Belt Length as measured on ATD               | mm    | 800    | 915       |
| Remainder of belt on reel                        | mm    | 870    | 725       |
| Total Belt Length for Continuous Webbing Systems | mm    | 3470   | 3470      |

**DATA SHEET NO. 6**  
**HIGH-SPEED CAMERA LOCATIONS AND DATA**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
Test Date: 9/4/2025

**CAMERA POSITIONS FOR FRONTAL IMPACTS**

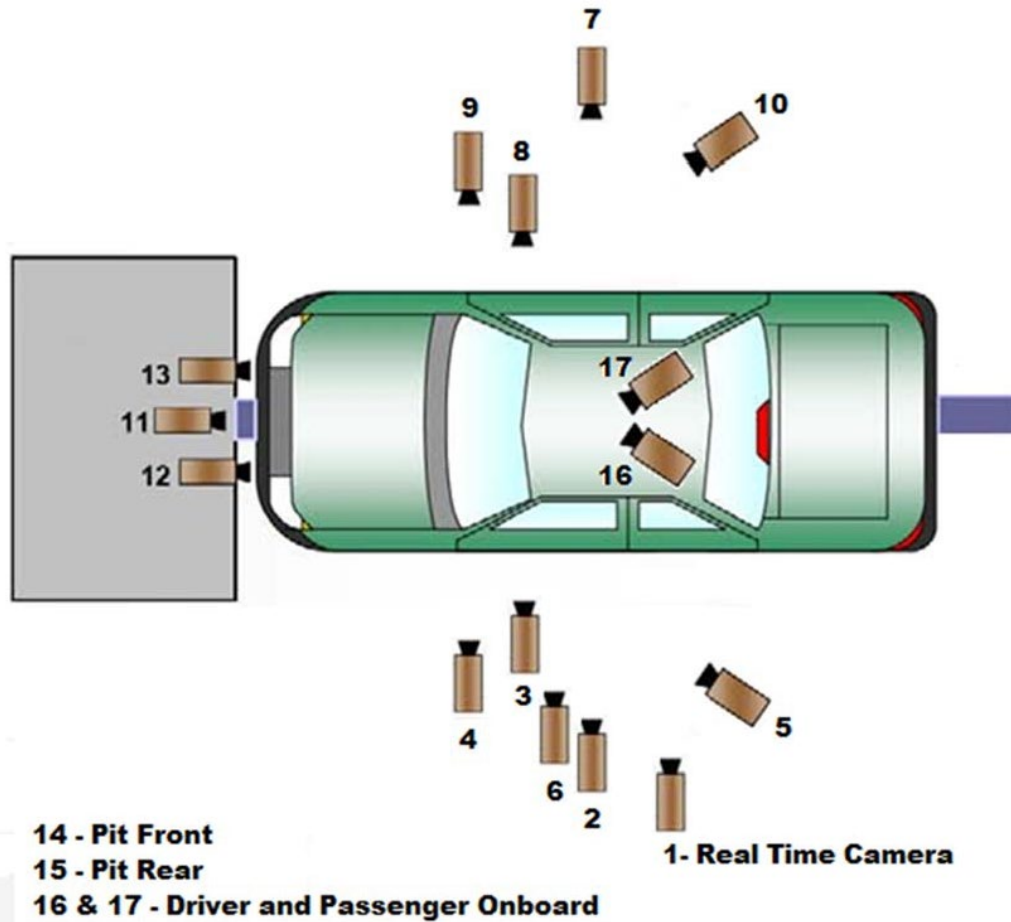

*\*\*Camera locations are approximate and not to scale*

**DATA SHEET NO. 6 (CONTINUED)**  
**HIGH-SPEED CAMERA LOCATIONS AND DATA**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025

**CAMERA LOCATIONS**

| No. | Camera View            | Coordinates* (mm) |       |       | Lens (mm) | Speed (fps) |
|-----|------------------------|-------------------|-------|-------|-----------|-------------|
|     |                        | X                 | Y     | Z     |           |             |
| 1   | Real-Time Left Overall |                   |       |       |           | 30          |
| 2   | Left Overall           | -2520             | -5760 | -1470 | 12        | 1000        |
| 3   | Driver Close-Up        | -1560             | -7040 | -2340 | 50        | 1000        |
| 4   | Left Front Half        | -1310             | -5880 | -1420 | 24        | 1000        |
| 5   | Left Angle             | -7180             | -5760 | -2260 | 75        | 1000        |
| 6   | Steering Column        | -860              | -5620 | -1250 | 50        | 1000        |
| 7   | Right Overall          | -2350             | 6250  | -1430 | 12        | 1000        |
| 8   | Passenger Close-Up     | -13310            | 7100  | -2280 | 50        | 1000        |
| 9   | Right Front Half       | -1010             | 5890  | -1530 | 24        | 1000        |
| 10  | Right Angle            | -7430             | 5460  | -2350 | 75        | 1000        |
| 11  | Windshield             | 160               | 0     | -2310 | 12        | 1000        |
| 12  | Driver Windshield      | 190               | -370  | -2230 | 25        | 1000        |
| 13  | Passenger Windshield   | 190               | 370   | -2230 | 25        | 1000        |
| 14  | Pit Front              | -1100             | 0     | 3340  | 24        | 1000        |
| 15  | Pit Rear               | -3280             | 0     | 3340  | 24        | 1000        |
| 16  | Driver Onboard         |                   |       |       | 12        | 1000        |
| 17  | Passenger Onboard      |                   |       |       | 12        | 1000        |
| 18  | Real-Time Pan View     |                   |       |       |           | 30          |

\*COORDINATES:

+X = forward of impact plane

+Y = right of monorail centerline


+Z = below ground level



# **DATA SHEET NO. 7** **VEHICLE ACCELEROMETER LOCATIONS**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
Test Date: 9/4/2025

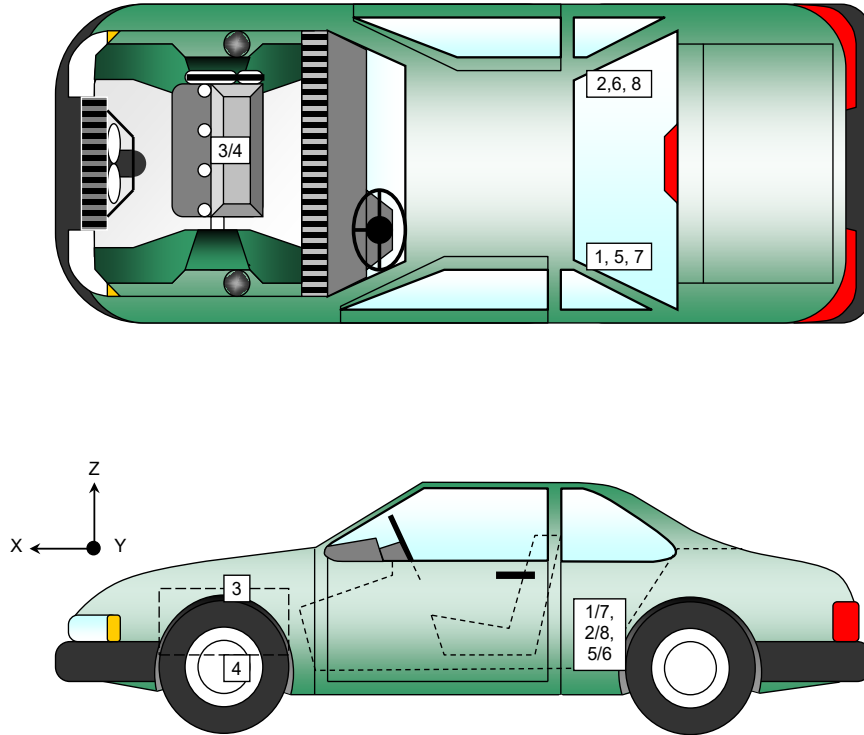

## **VEHICLE ACCELEROMETER PRE-TEST LOCATIONS**

| No. | Accelerometer Location                                       | Measurements (mm) |      |      |
|-----|--------------------------------------------------------------|-------------------|------|------|
|     |                                                              | X                 | Y    | Z    |
| 1   | Left Rear Crossmember Accelerometer – X Direction            | 2213              | -471 | -528 |
| 2   | Right Rear Crossmember Accelerometer – X Direction           | 2207              | 495  | -528 |
| 3   | Engine Top X                                                 |                   |      |      |
| 4   | Engine Bottom X                                              | 3985              | 9    | -259 |
| 5   | Left Rear Crossmember Accelerometer – Z Direction            | 2213              | -471 | -528 |
| 6   | Right Rear Crossmember Accelerometer – Z Direction           | 2207              | 495  | -528 |
| 7   | Left Rear Crossmember Accelerometer Redundant – X Direction  | 2213              | -471 | -528 |
| 8   | Right Rear Crossmember Accelerometer Redundant – X Direction | 2207              | 495  | -528 |




Reference Points: X - Rear Surface of Vehicle (+ forward)  
Y - Vehicle Centerline (+ to right)  
Z - Ground Plane (+ down)

# **DATA SHEET NO. 8** **PHOTOGRAPHIC REFERENCE TARGET LOCATIONS**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025

| Item | Value (mm) |
|------|------------|
| A    | 405        |
| B    | 965        |
| C    | 2060       |
| D    | 609        |
| E    | 2272       |
| F    | 74         |
| G    |            |
| H    | 1324       |
| I    | 1281       |
| J    | 1141       |
| K    | 1140       |
| L    | 1380       |
| M    | 1323       |
| N    | 1377       |
| O    | 1137       |
| P    | 1145       |
| Q    | 1281       |

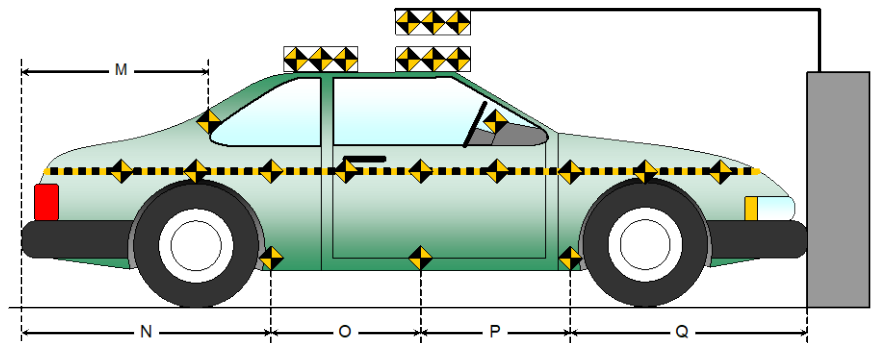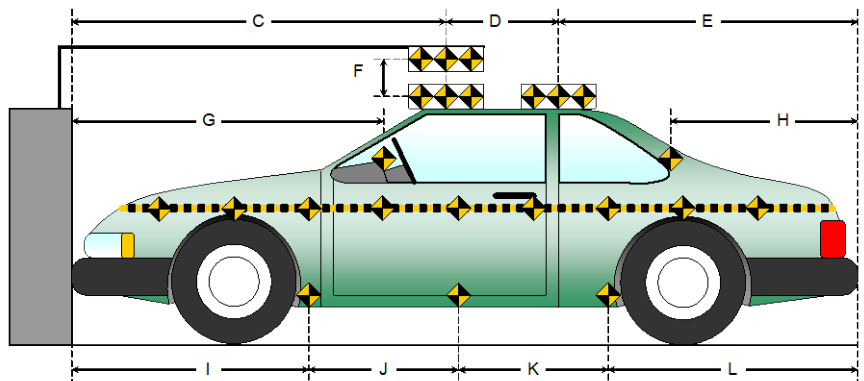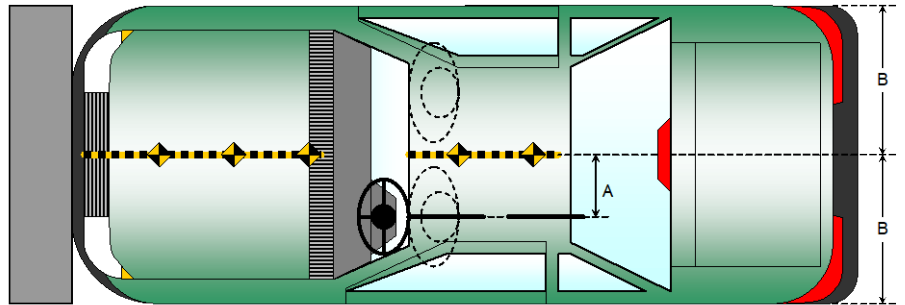

# **DATA SHEET NO. 9** **LOAD CELL LOCATIONS ON FIXED BARRIER**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025

## **ADVANCED RESEARCH LOAD CELL BARRIER**

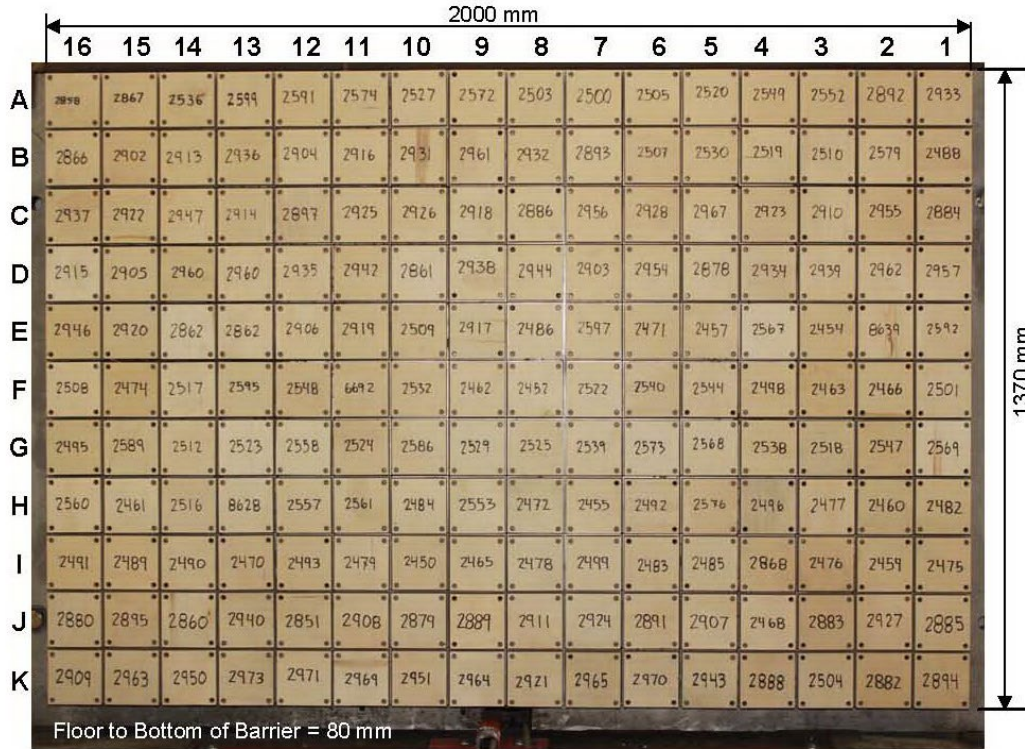


Photo for Reference Only

## **Centerline**

|      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| A-16 | A-15 | A-14 | A-13 | A-12 | A-11 | A-10 | A-09 | A-08 | A-07 | A-06 | A-05 | A-04 | A-03 | A-02 | A-01 |
| B-16 | B-15 | B-14 | B-13 | B-12 | B-11 | B-10 | B-09 | B-08 | B-07 | B-06 | B-05 | B-04 | B-03 | B-02 | B-01 |
| C-16 | C-15 | C-14 | C-13 | C-12 | C-11 | C-10 | C-09 | C-08 | C-07 | C-06 | C-05 | C-04 | C-03 | C-02 | C-01 |
| D-16 | D-15 | D-14 | D-13 | D-12 | D-11 | D-10 | D-09 | D-08 | D-07 | D-06 | D-05 | D-04 | D-03 | D-02 | D-01 |
| E-16 | E-15 | E-14 | E-13 | E-12 | E-11 | E-10 | E-09 | E-08 | E-07 | E-06 | E-05 | E-04 | E-03 | E-02 | E-01 |
| F-16 | F-15 | F-14 | F-13 | F-12 | F-11 | F-10 | F-09 | F-08 | F-07 | F-06 | F-05 | F-04 | F-03 | F-02 | F-01 |
| G-16 | G-15 | G-14 | G-13 | G-12 | G-11 | G-10 | G-09 | G-08 | G-07 | G-06 | G-05 | G-04 | G-03 | G-02 | G-01 |
| H-16 | H-15 | H-14 | H-13 | H-12 | H-11 | H-10 | H-09 | H-08 | H-07 | H-06 | H-05 | H-04 | H-03 | H-02 | H-01 |
| I-16 | I-15 | I-14 | I-13 | I-12 | I-11 | I-10 | I-09 | I-08 | I-07 | I-06 | I-05 | I-04 | I-03 | I-02 | I-01 |
| J-16 | J-15 | J-14 | J-13 | J-12 | J-11 | J-10 | J-09 | J-08 | J-07 | J-06 | J-05 | J-04 | J-03 | J-02 | J-01 |
| K-16 | K-15 | K-14 | K-13 | K-12 | K-11 | K-10 | K-09 | K-08 | K-07 | K-06 | K-05 | K-04 | K-03 | K-02 | K-01 |

Load Cells are 121 mm x 121 mm with a 7 mm gap in between each load cell.

**DATA SHEET NO. 10**  
**TEST VEHICLE SUMMARY OF RESULTS**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025

**INSTRUMENTATION**

| Instrumentation                  | Number of Channels Collected |
|----------------------------------|------------------------------|
| Driver Dummy Data Channels       | 49                           |
| Passenger Dummy Data Channels    | 49                           |
| Vehicle Structure Accelerometers | 7                            |
| Barrier Channels                 | 176                          |
| Total                            | 281                          |

**CAMERA COVERAGE**

| Type of Camera             | Number Used in this Test |
|----------------------------|--------------------------|
| High-Speed Vehicle Onboard | 2                        |
| High-Speed Offboard        | 14                       |
| Real-Time                  | 2                        |
| Total                      | 18                       |

**DATA SHEET NO. 11**  
**POST-TEST OBSERVATIONS**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
Test Date: 9/4/2025

**TEST DUMMY INFORMATION AND CONTACT LOCATIONS**

| Description             | Driver                                  | Passenger                |
|-------------------------|-----------------------------------------|--------------------------|
| Dummy Type / Serial No. | HIII 50% / 064                          | HIII 5% / 142            |
| Head Contact            | Frontal Airbag                          | Frontal Airbag, Headrest |
| Upper Torso Contact     | Frontal Airbag                          | Frontal Airbag           |
| Lower Torso Contact     | None                                    | None                     |
| Left Knee Contact       | Knee Bolster,<br>Steering Column Shroud | Glove Box                |
| Right Knee Contact      | Knee Bolster                            | Glove Box                |

**DOOR OPENING, TRUNK OPENING, AND SEAT TRACK INFORMATION**

| Description                  | Driver                                                | Passenger                                             |
|------------------------------|-------------------------------------------------------|-------------------------------------------------------|
| Locked/Unlocked Doors        | Doors were locked pre-test                            | Doors were locked pre-test                            |
| Front Door Opening           | Remained closed and unlocked;<br>opened without tools | Remained closed and unlocked;<br>opened without tools |
| Rear Door Opening            | Remained closed and unlocked;<br>opened without tools | Remained closed and unlocked;<br>opened without tools |
| Trunk/Hatch/Tailgate Opening | Remained closed; opened without tools                 |                                                       |
| Seat Track Shift (mm)        | 0                                                     | 0                                                     |
| Seat Back Movement           | None                                                  | None                                                  |

**OTHER VEHICLE POST-TEST OBSERVATIONS**

| Critical Areas of Performance | Observations and Conclusions |
|-------------------------------|------------------------------|
| Windshield Damage             | Cracked from lower edge      |
| Window Damage                 | None                         |
| Other Notable Effects         | RF tire pressure lost        |

**VEHICLE REBOUND FROM BARRIER**

| Measured Parameter | Units | Value |
|--------------------|-------|-------|
| Left Side          | mm    | 1133  |
| Center             | mm    | 1085  |
| Right Side         | mm    | 1149  |
| Average            | mm    | 1122  |


**SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION**

| Restraint Type           | Driver  |          | Passenger |          |
|--------------------------|---------|----------|-----------|----------|
|                          | Mounted | Deployed | Mounted   | Deployed |
| Frontal Airbag           | Yes     | Yes      | Yes       | Yes      |
| Curtain Side Airbag      | Yes     | Yes      | Yes       | Yes      |
| Torso/Pelvis Side Airbag | Yes     | No       | Yes       | No       |
| Knee Airbag              | No      |          | No        |          |
| Seat Belt Pretensioner   | Yes     | Yes      | Yes       | Yes      |
| Seat Belt Load Limiter   | Yes     | Yes      | Yes       | Yes      |
| Other                    |         |          |           |          |

## DATA SHEET NO. 12 VEHICLE PROFILE MEASUREMENTS

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025

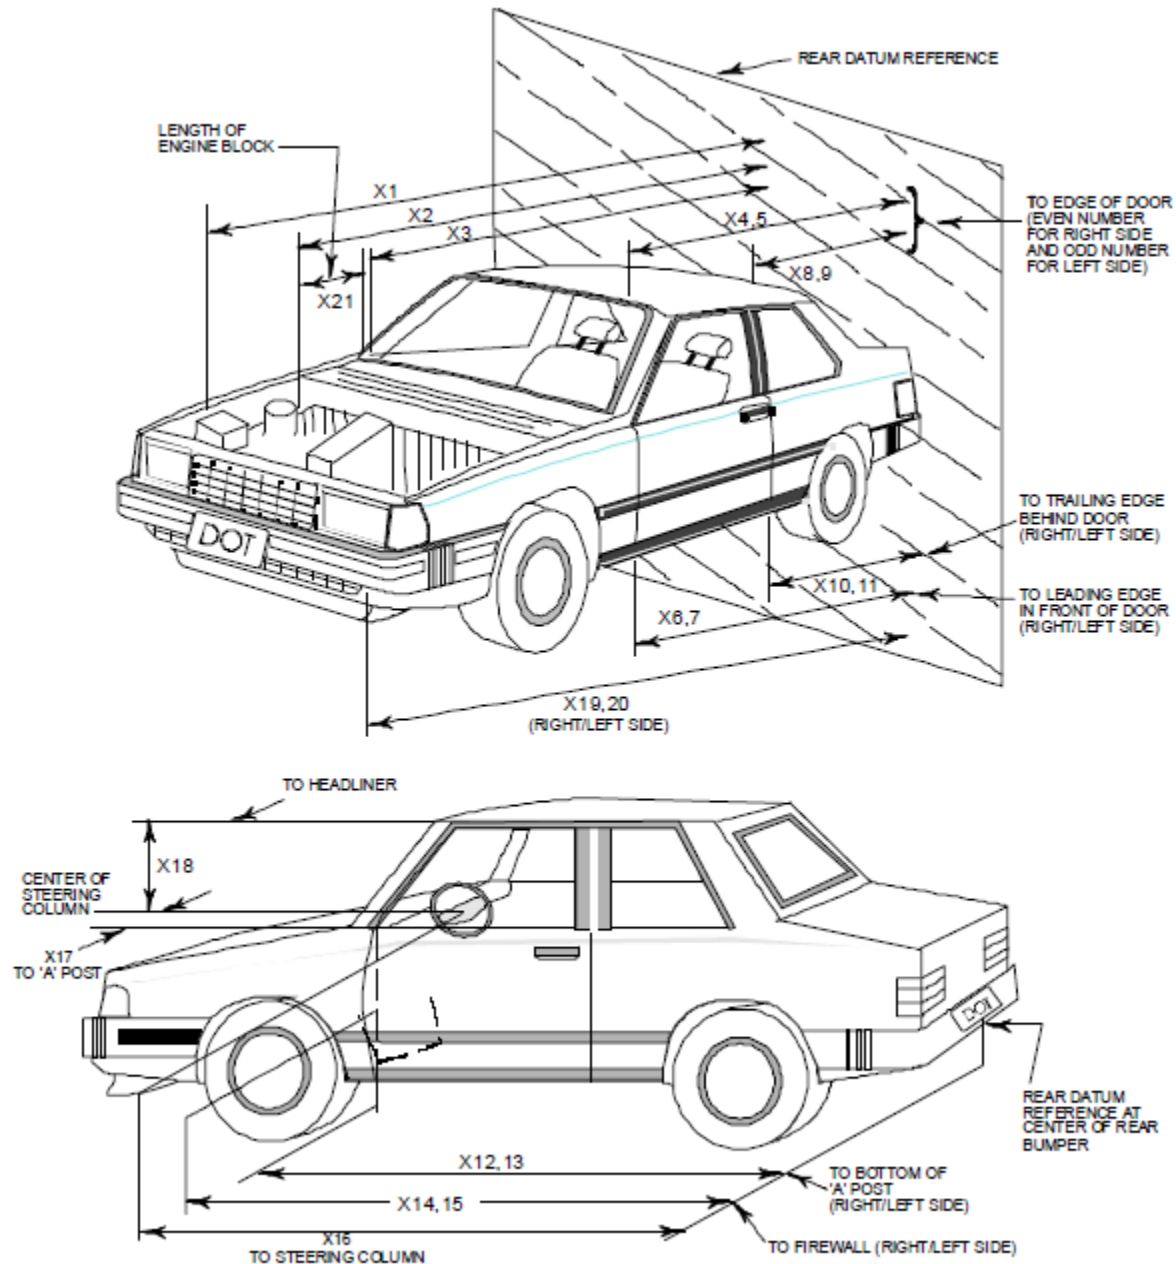

**DATA SHEET NO. 12 (CONTINUED)**  
**VEHICLE PROFILE MEASUREMENTS**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
Test Date: 9/4/2025

| No. | Measurement Description                   | Pre-Test | Post-Test | Change |
|-----|-------------------------------------------|----------|-----------|--------|
| 1   | Total Length of Vehicle at Centerline     | 4941     | 4420      | -521   |
| 2   | RSOV to Front of Engine                   | 4652     | 4313      | -339   |
| 3   | RSOV to Firewall                          | 4728     | 4442      | -286   |
| 4   | RSOV to Upper Leading Edge of Right Door  | 3660     | 3654      | -6     |
| 5   | RSOV to Upper Leading Edge of Left Door   | 3662     | 3661      | -1     |
| 6   | RSOV to Lower Leading Edge of Right Door  | 3619     | 3617      | -2     |
| 7   | RSOV to Lower Leading Edge of Left Door   | 3621     | 3624      | 3      |
| 8   | RSOV to Upper Trailing Edge of Right Door | 2663     | 2657      | -6     |
| 9   | RSOV to Upper Trailing Edge of Left Door  | 2662     | 2662      | 0      |
| 10  | RSOV to Lower Trailing Edge of Right Door | 2664     | 2662      | -2     |
| 11  | RSOV to Lower Trailing Edge of Left Door  | 2665     | 2668      | 3      |
| 12  | RSOV to Bottom of "A" Post of Right Side  | 3659     | 3663      | 4      |
| 13  | RSOV to Bottom of "A" Post of Left Side   | 3660     | 3663      | 3      |
| 14  | RSOV to Firewall, Right Side              | 4660     | 4389      | -271   |
| 15  | RSOV to Firewall, Left Side               | 4660     | 4315      | -345   |
| 16  | RSOV to Steering Column                   | 3311     | 3368      | 57     |
| 17  | Center of Steering Column to "A" Post     | 301      | 299       | -2     |
| 18  | Center of Steering Column to Headliner    | 462      | 490       | 28     |
| 19  | RSOV to Right Side of Front Bumper        | 4802     | 4484      | -318   |
| 20  | RSOV to Left Side of Front Bumper         | 4801     | 4521      | -280   |
| 21  | Length of Engine Block                    | 693      | 693       | 0      |
| RD  | RSOV to Right Side of Dash Panel          | 3547     | 3537      | -10    |
| CD  | RSOV to Center of Dash Panel              | 3639     | 3626      | -13    |
| LD  | RSOV to Left Side of Dash Panel           | 3547     | 3540      | -7     |

All dimensions in mm



**DATA SHEET NO. 13**  
**ACCIDENT INVESTIGATION DIVISION DATA**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
Test Date: 9/4/2025

**VEHICLE INFORMATION**

VIN: WVG6YVEB8SH020085  
Vehicle Size Category: MPV


Wheelbase (mm): 3246  
Test Weight (kg): 2955.0

**ACCELEROMETER DATA**

Accelerometer Locations: As per Data Sheet No. 7  
Cal. Procedure/Interval: MGA Procedure / 6 month  
Integration Algorithm: Trapezoidal  
Linearity: > 99%  
Impact Velocity (km/h): 56.21  
Velocity Change (km/h): 67.4  
Time of Separation (msec) 118

**CRUSH PROFILE**

Collision Deformation Classification: 12FDEW5  
Midpoint of Damage: Centerline  
Damage Region Length (mm): 1532  
Impact Mode: Frontal

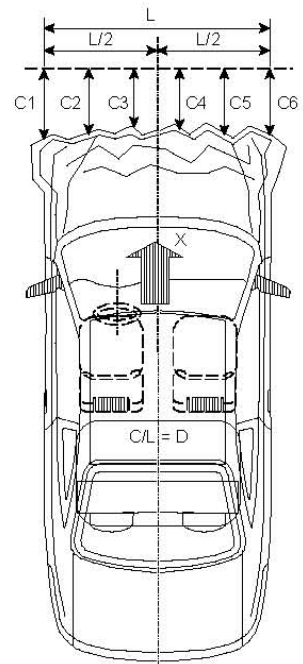

| No. | Measurement Description    | Units | Pre-Test | Post-Test | Exterior Crush |
|-----|----------------------------|-------|----------|-----------|----------------|
| C1  | Crush zone 1 at left side  | mm    | 2199     | 2479      | 280            |
| C2  | Crush zone 2 at left side  | mm    | 2084     | 2434      | 350            |
| C3  | Crush zone 3 at left side  | mm    | 2053     | 2453      | 400            |
| C4  | Crush zone 4 at right side | mm    | 2052     | 2454      | 402            |
| C5  | Crush zone 5 at right side | mm    | 2084     | 2457      | 373            |
| C6  | Crush zone 6 at right side | mm    | 2198     | 2516      | 318            |
| L   | C1 TO C6                   | mm    | 1532     | 1563      | 31             |



**DATA SHEET NO. 14**  
**VEHICLE INTRUSION MEASUREMENTS**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
Test Program: NCAP Frontal Barrier Impact Test


NHTSA No.: O20255800  
Test Date: 9/4/2025

**DOOR OPENING WIDTH**

| Item | Description      | Units | Pre-Test | Post-Test | Change |
|------|------------------|-------|----------|-----------|--------|
| A    | Left Side Upper  | mm    | 908      | 903       | -5     |
| B    | Left Side Lower  | mm    | 804      | 800       | -4     |
| D    | Right Side Upper | mm    | 908      | 903       | -5     |
| E    | Right Side Lower | mm    | 818      | 814       | -4     |

**WHEELBASE MEASUREMENTS**

| Item | Description          | Units | Pre-Test | Post-Test | Change |
|------|----------------------|-------|----------|-----------|--------|
| C    | Left Side Wheelbase  | mm    | 3246     | 3151      | -95    |
| F    | Right Side Wheelbase | mm    | 3238     | 3118      | -120   |

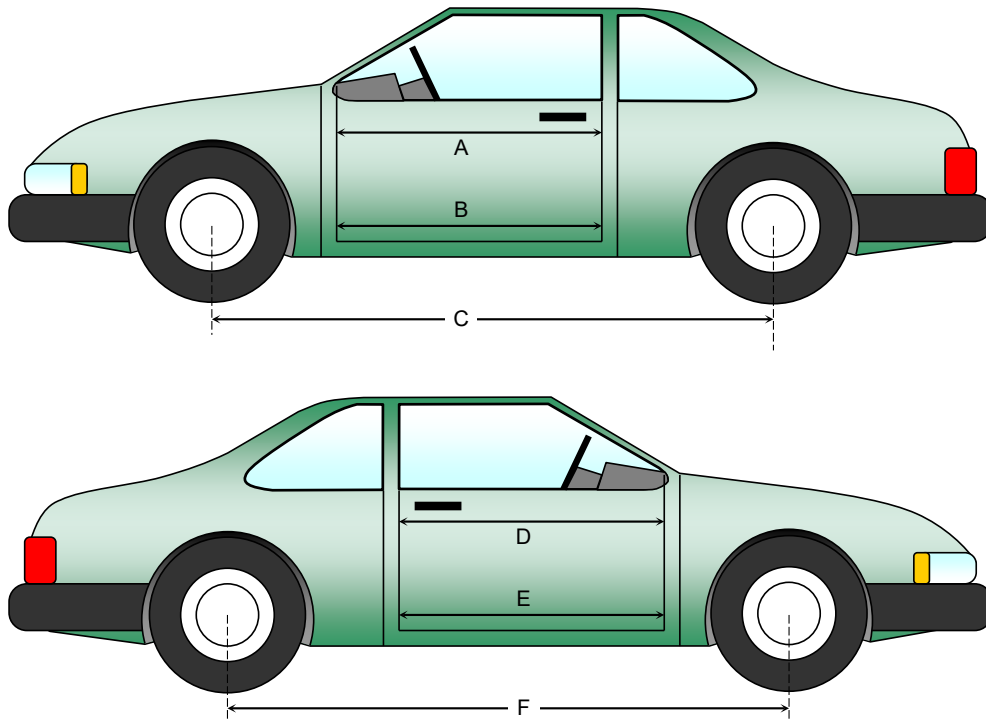

**DATA SHEET NO. 14 (CONTINUED)**  
**VEHICLE INTRUSION MEASUREMENTS**


Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025

**DRIVER COMPARTMENT INTRUSION**

| Item | Description                              | Units | Pre-Test | Post-Test | Change |
|------|------------------------------------------|-------|----------|-----------|--------|
| AB   | Door Opening (Inside Window Jam)         | mm    | 709      | 710       | 1      |
| CX   | Left Knee Bolster to X                   | mm    | 308      | 294       | -14    |
| DX   | Right Knee Bolster to X                  | mm    | 306      | 290       | -16    |
| EX   | Brake Pedal to X                         | mm    | 516      | 514       | -2     |
| FX   | Foot Rest to X                           | mm    | 591      | 566       | -25    |
| GX   | Center of Steering Column Wheel Hub to X | mm    | 90       | 136       | 46     |

X = Front of Seat Track (stationary)

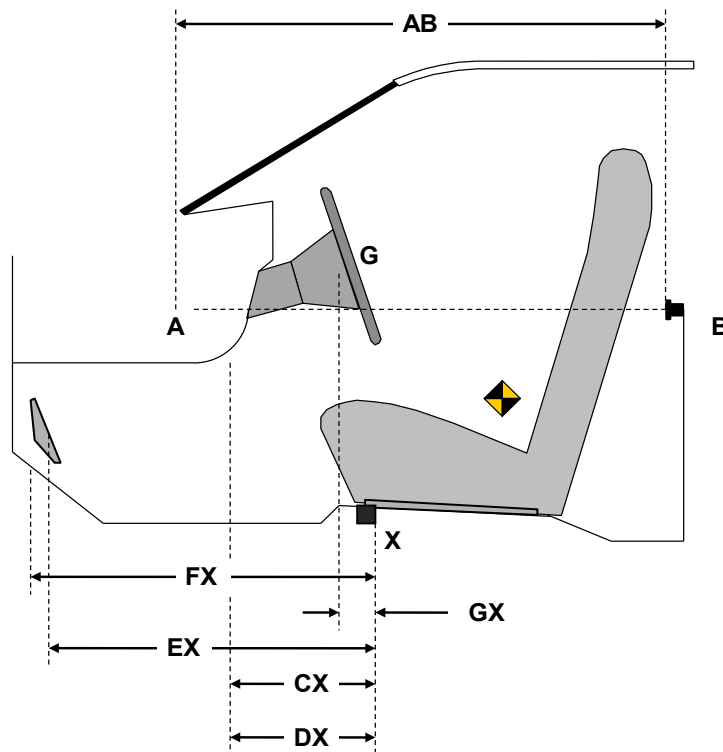

**DRIVER COMPARTMENT**

**DATA SHEET NO. 15**  
**SUMMARY OF INDICANT FMVSS NO. 212 AND FMVSS NO. 219 (PARTIAL) DATA**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025

**WINDSHIELD MOUNTING DETAILS**


Windshield glass is secured to the vehicle frame with a rubber trim and glue.

The standard requires that the post-test retention measurement be a minimum of 75 percent of the pre-test total periphery measurement for vehicles not equipped with occupant passive restraints and 50 percent for each side of the windshield for vehicles which are equipped with occupant passive restraints.

Temperature of windshield molding during test: 21.6°C.

**WINDSHIELD PERIPHERY MEASUREMENTS**

| Measurement | Pre-Test (mm) | Post-Test (mm) | % of Retention |
|-------------|---------------|----------------|----------------|
| Left Side   | 2487          | 2487           | 100            |
| Right Side  | 2487          | 2487           | 100            |
| Total       | 4974          | 4974           | 100            |

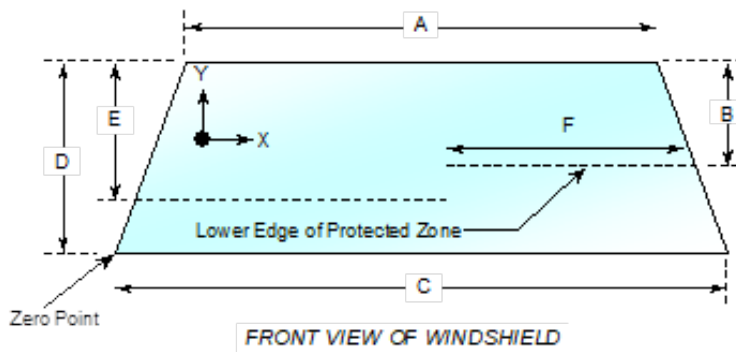

| Item | Units | Value |
|------|-------|-------|
| A    | mm    | 1362  |
| B    | mm    | 585   |
| C    | mm    | 1668  |
| D    | mm    | 972   |
| E    | mm    | 584   |
| F    | mm    | 522   |

**AREA OF PROTECTED ZONE FAILURES**

A. Provide coordinates of the area that the protected zone was penetrated more than 0.25 inches by a vehicle component other than one that is normally in contact with the windshield. **None**

| X | Y |
|---|---|
|   |   |
|   |   |
|   |   |
|   |   |

B. Provide coordinates of the area beneath the protected zone that the inner surface of the windshield was penetrated by a vehicle component. **None**

| X | Y |
|---|---|
|   |   |
|   |   |
|   |   |
|   |   |

**DATA SHEET NO. 16**  
**FMVSS NO. 301 BARRIER IMPACT AND STATIC ROLLOVER RESULTS**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025


**FMVSS 301 FUEL SYSTEM INTEGRITY POST IMPACT DATA**

Temperature at Time of Impact: 21.6°C

Test Time: 11:46 a.m.

- A. From impact until vehicle motion ceases: (Maximum Allowable = 1 ounce) N/A oz.  
 B. For the 5 minute period after motion ceases: (Maximum Allowable = 5 ounces) N/A oz.  
 C. For the following 25 minutes: (Maximum Allowable = 1 ounce / minute) N/A  
 D. Spillage Details: N/A

**FMVSS 301 STATIC ROLLOVER RESULTS**

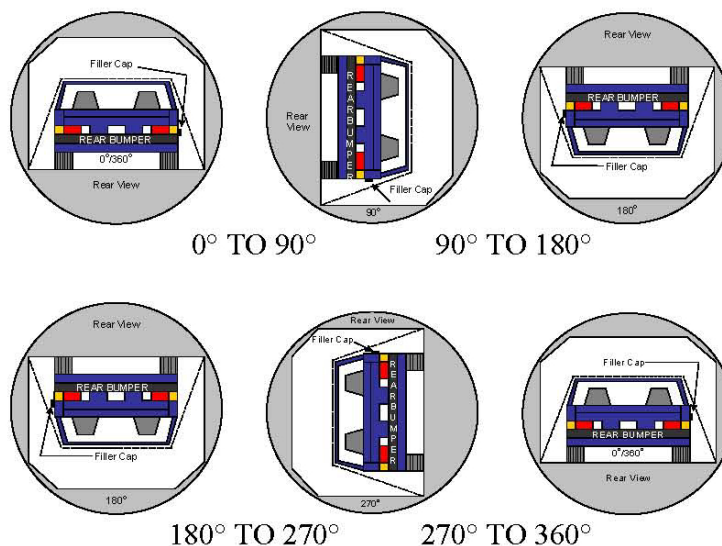

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.
2. The position hold time at each position is 300 seconds (minimum).
3. Details of Stoddard Solvent spillage: **None**

**SOLVENT COLLECTION TIME TABLE IN SECONDS**

| Test Phase   | Rotation Time | Hold Time | Total Time |
|--------------|---------------|-----------|------------|
| 0° to 90°    |               |           |            |
| 90° to 180°  |               |           |            |
| 180° to 270° |               |           |            |
| 270° to 360° |               |           |            |

**DATA SHEET NO. 16 (CONTINUED)**  
**FMVSS 301 BARRIER IMPACT AND STATIC ROLLOVER**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025

**FMVSS 301 SPILLAGE TABLE (UNITS IN OUNCES)**

| Test Phase   | First 5 Minutes | Sixth Minute | Seventh Minute | Eight Minute |
|--------------|-----------------|--------------|----------------|--------------|
| 0° to 90°    |                 |              |                |              |
| 90° to 180°  |                 |              |                |              |
| 180° to 270° |                 |              |                |              |
| 270° to 360° |                 |              |                |              |


**SOLVENT SPILLAGE LOCATION TABLE**

| Test Phase   | Spillage Location |
|--------------|-------------------|
| 0° to 90°    |                   |
| 90° to 180°  |                   |
| 180° to 270° |                   |
| 270° to 360° |                   |

**DATA SHEET NO. 17**  
**DUMMY/VEHICLE TEMPERATURE STABILIZATION DATA**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025

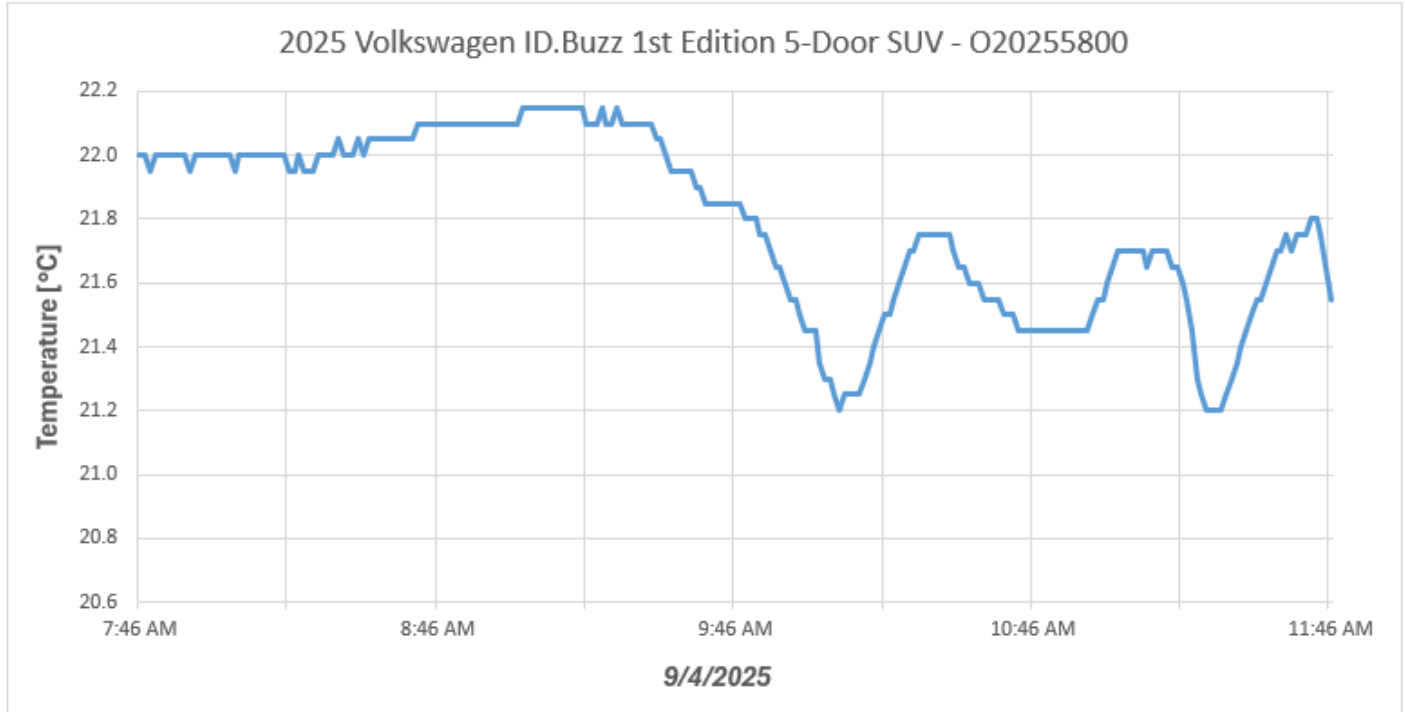

| Serial # | Description                    | Maximum | Average | Minimum | Units |
|----------|--------------------------------|---------|---------|---------|-------|
| X1549602 | VSC Start Room A - Temp (1038) | 22.15   | 21.79   | 21.20   | °C    |

**DATA SHEET NO. 305-1**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**  
**FOR INDICANT FMVSS NO. 305 TESTING**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025

**ELECTRIC VEHICLE PROPULSION SYSTEM**

|                                                              | Units | Observations and Conclusions            |
|--------------------------------------------------------------|-------|-----------------------------------------|
| Type of Electric Vehicle                                     |       | Electric                                |
| Propulsion Battery Type                                      |       | Lithium-Ion                             |
| Nominal Voltage                                              | V     | 380                                     |
| Physical Location of Automatic Propulsion Battery Disconnect |       | Inside the high-voltage battery housing |
| Auxiliary Battery Type                                       |       | 12V Lead                                |

**PROPULSION BATTERY SYSTEM DATA**

|                                                                          | Units | Observations and Conclusions                                        |
|--------------------------------------------------------------------------|-------|---------------------------------------------------------------------|
| Electrolyte Fluid Type                                                   |       | Liquid                                                              |
| Electrolyte Fluid Specific Gravity                                       | g/L   | 1164-1224                                                           |
| Electrolyte Fluid Kinematic Viscosity                                    | cSt   | 2.6-3.0                                                             |
| Electrolyte Fluid Color                                                  |       | Colorless                                                           |
| Propulsion Battery Coolant Type, Color, Specific Gravity (if applicable) |       | Liquid cooling (50% water / 50% glycol)                             |
| Location of Battery Modules                                              |       | Inside Passenger Compartment                                        |
|                                                                          | X     | Outside Passenger Compartment                                       |
|                                                                          |       | The high-voltage battery is located below the occupant compartment. |

**PROPULSION BATTERY STATE OF CHARGE**

|                                                                                     |         |
|-------------------------------------------------------------------------------------|---------|
| <i>For all battery types:</i>                                                       |         |
| Voltage range corresponding to <b>useable energy</b> of the battery:                |         |
| Minimum State of Charge                                                             |         |
| Maximum State of Charge                                                             | 442.0 V |
| 95% of Maximum State of Charge                                                      | 419.9 V |
| Test Voltage - No less than 95% of maximum State of Charge                          | 428.0 V |
| <i>For batteries that are rechargeable ONLY by an energy source on the vehicle:</i> |         |
| Voltage range corresponding to <b>useable energy</b> of the battery:                |         |
| Minimum State of Charge                                                             |         |
| Maximum State of Charge                                                             |         |
| Test Voltage – Maximum practicable State of Charge within Normal Operating Range    |         |

**DATA SHEET NO. 305-2  
PRE-IMPACT DATA  
FOR INDICANT FMVSS NO. 305 TESTING**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
Test Date: 9/4/2025

**VEHICLE CHASSIS GROUND POINT(S) LOCATION(S)**

|                                                             |                              |
|-------------------------------------------------------------|------------------------------|
| Details of Vehicle Chassis<br>Ground Point(s) & Location(s) | Center console mounting bolt |
|-------------------------------------------------------------|------------------------------|

**PROPULSION BATTERY SYSTEM**

|                                                                     |                                                                            |
|---------------------------------------------------------------------|----------------------------------------------------------------------------|
| Details of Electric Energy Storage/Conversion<br>System Test Points | Connected at + and – leads between HV battery and<br>PTC (electric heater) |
| Additional Comments                                                 | None                                                                       |



**DATA SHEET NO. 305-3**  
**PRE-IMPACT ELECTRICAL ISOLATION MEASUREMENTS AND CALCULATIONS**  
**FOR INDICANT FMVSS NO. 305 TESTING**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025

**VOLTMETER INFORMATION**

|                          | Units | Observations and Conclusions |
|--------------------------|-------|------------------------------|
| Make                     |       | Fluke                        |
| Model                    |       | 177                          |
| Serial Number            |       | 62100018                     |
| Internal Impedance Value | MΩ    | > 10 MΩ < 100 pF             |
| Resolution               | V     | 0.001                        |
| Last Calibration Date    |       | 8/1/2025                     |

**PROPULSION BATTERY VOLTAGE**

Measurement shall be made with Energy Storage/Conversion System connected to the vehicle propulsion system, and the vehicle in the “ready-to-drive” (propulsion system energized) position.

NOTE: If voltage measurement is not at the voltage or within the normal operating voltage range specified by the manufacturer, the battery must be charged.

|    |   |       |
|----|---|-------|
| Vb | V | 428.3 |
|----|---|-------|

**ELECTRIC ISOLATION MEASUREMENTS**  
**PROPULSION BATTERY TO VEHICLE CHASSIS**

Vehicle chassis point(s) determined and supplied to contractor by COTR.

|    |   |       |
|----|---|-------|
| V1 | V | 75.2  |
| V2 | V | 166.2 |

**PROPULSION BATTERY TO VEHICLE CHASSIS ACROSS RESISTOR**

The known resistance Ro (in ohms) should be approximately 500 times the normal operating voltage of the vehicle (in volts) per SAE J1766.

|    |   |         |
|----|---|---------|
| Ro | Ω | 226,100 |
|----|---|---------|

|                |   |      |
|----------------|---|------|
| V1' Pre-Impact | V | 23.9 |
| V2' Pre-Impact | V | 28.7 |

**DATA SHEET NO. 305-3 (CONTINUED)**  
**PRE-IMPACT ELECTRICAL ISOLATION MEASUREMENTS AND CALCULATIONS**  
**FOR INDICANT FMVSS NO. 305 TESTING**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025

**ELECTRICAL ISOLATION CALCULATIONS**

NOTE: If measured voltage is zero and results in a division by zero, record "Zero Volts".  
 This "zero voltage" condition is considered as being compliant.

|                                                                                  |            |           |
|----------------------------------------------------------------------------------|------------|-----------|
| $R_{i1} = R_o (1 + V_2/V_1) [(V_1 - V_1')/V_1']$                                 |            |           |
| Ri1 Pre-Impact                                                                   | $\Omega$   | 1,557,900 |
| $R_{i2} = R_o (1 + V_1/V_2) [(V_2 - V_2')/V_2']$                                 |            |           |
| Ri2 Pre-Impact                                                                   | $\Omega$   | 1,573,358 |
| $R_i = \text{The lesser of } R_{i1} \text{ and } R_{i2}$                         |            |           |
| Ri Pre-Impact                                                                    | $\Omega$   | 1,557,900 |
| $R_i / V_b = \text{Electrical Isolation Value} / \text{Nominal Battery Voltage}$ |            |           |
| Ri / Vb Pre-Impact                                                               | $\Omega/V$ | 3,637     |

NOTE: The minimum Electrical Isolation Value is 500  $\Omega/V$ .

|                                                                  | Yes  | No (Fail) |
|------------------------------------------------------------------|------|-----------|
| Is the measured Electrical Isolation Value $\geq 500 \Omega/V$ ? | X    |           |
| Additional Comments                                              | None |           |

**DATA SHEET NO. 305-4  
POST-IMPACT DATA  
FOR INDICANT FMVSS NO. 305 TESTING**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
Test Date: 9/4/2025

**VOLTMETER INFORMATION**

|                          | Units | Observations and Conclusions |
|--------------------------|-------|------------------------------|
| Make                     |       | Fluke                        |
| Model                    |       | 177                          |
| Serial Number            |       | 62100018                     |
| Internal Impedance Value | MΩ    | > 10 MΩ < 100 pF             |
| Resolution               | V     | 0.001                        |
| Last Calibration Date    |       | 8/1/2025                     |

**ELECTRICAL ISOLATION MEASUREMENTS**

|                |   |      |
|----------------|---|------|
| Vb Post-Impact | V | 0.19 |
|----------------|---|------|

|                 |   |      |             |   |         |    |         |
|-----------------|---|------|-------------|---|---------|----|---------|
| V1 Post-Impact  | V | 0.09 | Impact Time | 2 | Minutes | 24 | Seconds |
| V2 Post-Impact  | V | 0.39 |             | 2 | Minutes | 28 | Seconds |
| V1' Post-Impact | V | 0.02 |             | 2 | Minutes | 39 | Seconds |
| V2' Post-Impact | V | 0.10 |             | 2 | Minutes | 34 | Seconds |

|    |   |         |
|----|---|---------|
| Ro | Ω | 226,100 |
|----|---|---------|

**DATA SHEET NO. 305-4 (CONTINUED)**  
**POST-IMPACT DATA**  
**FOR INDICANT FMVSS NO. 305 TESTING**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025

**ELECTRICAL ISOLATION CALCULATIONS**

NOTE: If measured voltage is zero and results in a division by zero, record "Zero Volts".  
 This "zero voltage" condition is considered as being compliant.

|                                                                |     |           |             |   |         |    |         |
|----------------------------------------------------------------|-----|-----------|-------------|---|---------|----|---------|
| $R_{i1} = R_o (1 + V_2/V_1) [(V_1 - V_1')/V_1']$               |     |           |             |   |         |    |         |
| Ri1 Post-Impact                                                | Ω   | 4,220,533 | Impact Time | 2 | Minutes | 39 | Seconds |
| $R_{i2} = R_o (1 + V_1/V_2) [(V_2 - V_2')/V_2']$               |     |           |             |   |         |    |         |
| Ri2 Post-Impact                                                | Ω   | 807,003   | Impact Time | 2 | Minutes | 34 | Seconds |
| Ri = The lesser of Ri1 and Ri2                                 |     |           |             |   |         |    |         |
| Ri Post-Impact                                                 | Ω   | 807,003   | Impact Time | 2 | Minutes | 34 | Seconds |
| Ri / Vb = Electrical Isolation Value / Nominal Battery Voltage |     |           |             |   |         |    |         |
| Ri / Vb Post-Impact                                            | Ω/V | 4,247,385 | Impact Time | 2 | Minutes | 34 | Seconds |

NOTE: The minimum Electrical Isolation Value is 500 Ω/V.

|                                                       |      |           |
|-------------------------------------------------------|------|-----------|
|                                                       | Yes  | No (Fail) |
| Is the measured Electrical Isolation Value ≥ 500 Ω/V? | X    |           |
| Additional Comments                                   | None |           |

**DATA SHEET NO. 305-4 (CONTINUED)**  
**POST-IMPACT DATA**  
**FOR INDICANT FMVSS NO. 305 TESTING**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025

**PROPULSION BATTERY SYSTEM COMPONENTS**

|                                                                                                                          |
|--------------------------------------------------------------------------------------------------------------------------|
| Describe any Propulsion Battery Module movement within the passenger compartment<br>[Supply photographs as appropriate]: |
| Not Applicable                                                                                                           |

|                                                                           | Yes (Fail) | No |
|---------------------------------------------------------------------------|------------|----|
| Has the Propulsion Battery Module moved within the passenger compartment? |            | X  |

|                                                                                                                                      |
|--------------------------------------------------------------------------------------------------------------------------------------|
| Describe intrusion of an outside Propulsion Battery Component into the passenger compartment<br>[Supply photographs as appropriate]: |
| No Intrusion                                                                                                                         |

|                                                                                      | Yes (Fail) | No |
|--------------------------------------------------------------------------------------|------------|----|
| Has an outside Propulsion Battery Component intruded into the passenger compartment? |            | X  |





|                                                                                      | Yes (Fail) | No |
|--------------------------------------------------------------------------------------|------------|----|
| Is the Propulsion Battery Electrolyte Spillage visible in the passenger compartment? |            | X  |

**DATA SHEET NO. 305-5**  
**STATIC ROLLOVER TEST DATA**  
**FOR INDICANT FMVSS NO. 305 TESTING**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025

**PROPULSION BATTERY SYSTEM COMPONENTS**



**PROPULSION BATTERY ELECTROLYTE COLLECTION TIME PERIOD**

| Test Phase  | Rotation Time<br>(spec. 1-3 min) |     |    |     | FMVSS 301<br>Hold Time |     | Total Time |     |    |     | Next Whole<br>Minute<br>Interval |     |
|-------------|----------------------------------|-----|----|-----|------------------------|-----|------------|-----|----|-----|----------------------------------|-----|
| 0° - 90°    | 1                                | min | 52 | sec | 5                      | min | 6          | min | 52 | sec | 7                                | min |
| 90° - 180°  | 1                                | min | 49 | sec | 5                      | min | 6          | min | 49 | sec | 7                                | min |
| 180° - 270° | 1                                | min | 50 | sec | 5                      | min | 6          | min | 50 | sec | 7                                | min |
| 270° - 360° | 1                                | min | 51 | sec | 5                      | min | 6          | min | 51 | sec | 7                                | min |

**TEST VEHICLE PROPULSION BATTERY ELECTROLYTE SPILLAGE**

NOTE: The maximum allowable Propulsion Battery Electrolyte Spillage is 5.0 Liters.

| Test Phase     | Propulsion Battery<br>Electrolyte Spillage (L) | Spillage Location |
|----------------|------------------------------------------------|-------------------|
| 0° to 90°      | 0                                              | Not Applicable    |
| 90° to 180°    | 0                                              | Not Applicable    |
| 180° to 270°   | 0                                              | Not Applicable    |
| 270° to 360°   | 0                                              | Not Applicable    |
| Total Spillage | 0                                              |                   |

|                                                                                      | Yes (Fail) | No |
|--------------------------------------------------------------------------------------|------------|----|
| Is the total Propulsion Battery Electrolyte Spillage greater than 5.0 Liters?        |            | X  |
| Is the Propulsion Battery Electrolyte Spillage visible in the passenger compartment? |            | X  |

**DATA SHEET NO. 305-5 (CONTINUED)**  
**STATIC ROLLOVER TEST DATA**  
**FOR INDICANT FMVSS NO. 305 TESTING**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025

**VOLTMETER INFORMATION**

|                          | Units | Observations and Conclusions |
|--------------------------|-------|------------------------------|
| Make                     |       | Fluke                        |
| Model                    |       | 177                          |
| Serial Number            |       | 62100018                     |
| Internal Impedance Value | MΩ    | > 10 MΩ < 100 pF             |
| Resolution               | V     | 0.001                        |
| Last Calibration Date    |       | 8/1/2025                     |

**ELECTRICAL ISOLATION MEASUREMENTS**

|                |   |         |
|----------------|---|---------|
| Vb Post-Impact | V | 0.34    |
| Ro             | Ω | 226,100 |

Record V1, V2, V1', V2' voltage measurements at the start of each successive increment of 90°, 180°, 270°, and 360° of the static rollover test.

|     | Voltage | Units | Test Phase | Time |     |    |     |
|-----|---------|-------|------------|------|-----|----|-----|
| V1  | 0.21    | V     | 0°         |      | min |    | sec |
|     | 0.16    |       | 90°        | 2    |     | 16 |     |
|     | 0.16    |       | 180°       | 2    |     | 28 |     |
|     | 0.06    |       | 270°       | 2    |     | 15 |     |
|     | 0.13    |       | 360°       | 2    |     | 30 |     |
| V2  | 0.53    | V     | 0°         |      | min |    | sec |
|     | 0.17    |       | 90°        | 2    |     | 20 |     |
|     | 0.17    |       | 180°       | 2    |     | 33 |     |
|     | 0.26    |       | 270°       | 2    |     | 19 |     |
|     | 0.46    |       | 360°       | 2    |     | 34 |     |
| V1' | 0.03    | V     | 0°         |      | min |    | sec |
|     | 0.16    |       | 90°        | 2    |     | 33 |     |
|     | 0.16    |       | 180°       | 2    |     | 43 |     |
|     | 0.02    |       | 270°       | 2    |     | 32 |     |
|     | 0.03    |       | 360°       | 2    |     | 44 |     |
| V2' | 0.09    | V     | 0°         |      | min |    | sec |
|     | 0.16    |       | 90°        | 2    |     | 27 |     |
|     | 0.16    |       | 180°       | 2    |     | 38 |     |
|     | 0.07    |       | 270°       | 2    |     | 25 |     |
|     | 0.15    |       | 360°       | 2    |     | 39 |     |

**DATA SHEET NO. 305-5 (CONTINUED)**  
**STATIC ROLLOVER TEST DATA**  
**FOR INDICANT FMVSS NO. 305 TESTING**

Test Vehicle: 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV  
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: O20255800  
 Test Date: 9/4/2025

**ELECTRICAL ISOLATION CALCULATIONS**

NOTE: If measured voltage is zero and results in a division by zero, record "Zero Volts".  
 This "zero voltage" condition is considered as being compliant.

|                                                                | Voltage   | Units | Test Phase | Time |    |     |
|----------------------------------------------------------------|-----------|-------|------------|------|----|-----|
| Ri1 = Ro (1 + V2/V1) [(V1-V1')/V1']                            |           |       |            |      |    |     |
| Ri1                                                            | 4,780,400 | Ω     | 0°         |      |    | sec |
|                                                                | 0         |       | 90°        | 2    | 33 |     |
|                                                                | 0         |       | 180°       | 2    | 43 |     |
|                                                                | 2,411,733 |       | 270°       | 2    | 32 |     |
|                                                                | 3,420,487 |       | 360°       | 2    | 44 |     |
| Ri2 = Ro (1 + V1/V2) [(V2-V2')/V2']                            |           |       |            |      |    |     |
| Ri2                                                            | 1,543,358 | Ω     | 0°         |      |    | sec |
|                                                                | 27,431    |       | 90°        | 2    | 27 |     |
|                                                                | 27,431    |       | 180°       | 2    | 38 |     |
|                                                                | 755,323   |       | 270°       | 2    | 25 |     |
|                                                                | 599,329   |       | 360°       | 2    | 39 |     |
| Ri = The lesser of Ri1 and Ri2                                 |           |       |            |      |    |     |
| Ri                                                             | 1,543,358 | Ω     | 0°         |      |    | sec |
|                                                                | 0         |       | 90°        | 2    | 33 |     |
|                                                                | 0         |       | 180°       | 2    | 43 |     |
|                                                                | 755,323   |       | 270°       | 2    | 25 |     |
|                                                                | 599,329   |       | 360°       | 2    | 39 |     |
| Ri / Vb = Electrical Isolation Value / Nominal Battery Voltage |           |       |            |      |    |     |
| Ri / Vb                                                        | 4,539,287 | Ω/V   | 0°         |      |    | sec |
|                                                                | 0         |       | 90°        | 2    | 33 |     |
|                                                                | 0         |       | 180°       | 2    | 43 |     |
|                                                                | 2,221,538 |       | 270°       | 2    | 25 |     |
|                                                                | 1,762,732 |       | 360°       | 2    | 39 |     |

NOTE: The minimum Electrical Isolation Value is 500  $\Omega/V$ .

|                                                                  | Yes                                                                                                           | No (Fail) |
|------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-----------|
| Is the measured Electrical Isolation Value $\geq 500 \Omega/V$ ? | X                                                                                                             |           |
| Additional Comments                                              | Post-test measured voltages are all well below 1V, causing some calculations to return very low Ri/Vb values. |           |



**APPENDIX A  
PHOTOGRAPHS**

## TABLE OF PHOTOGRAPHS

|               |                                                                     | <u>Page No.</u> |
|---------------|---------------------------------------------------------------------|-----------------|
| Photo No. 001 | Load Cell Location                                                  | A-1             |
| Photo No. 002 | Pre-Test Load Cell Wall                                             | A-1             |
| Photo No. 003 | Post-Test Load Cell Wall                                            | A-2             |
| Photo No. 004 | Manufacturer's Label                                                | A-2             |
| Photo No. 005 | Tire Placard                                                        | A-3             |
| Photo No. 006 | 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV Frontal As Delivered | A-3             |
| Photo No. 007 | Left Rear 3-4 View, As Received                                     | A-4             |
| Photo No. 008 | Pre-Test Front View of Test Vehicle                                 | A-4             |
| Photo No. 009 | Post-Test Front View of Test Vehicle                                | A-5             |
| Photo No. 010 | Pre-Test Left View of Test Vehicle                                  | A-5             |
| Photo No. 011 | Post-Test Left View of Test Vehicle                                 | A-6             |
| Photo No. 012 | Pre-Test Right View of Test Vehicle                                 | A-6             |
| Photo No. 013 | Post-Test Right View of Test Vehicle                                | A-7             |
| Photo No. 014 | Pre-Test Right Front 3-4 View                                       | A-7             |
| Photo No. 015 | Post-Test Right Front 3-4 View                                      | A-8             |
| Photo No. 016 | Pre-Test Left Rear 3-4 View                                         | A-8             |
| Photo No. 017 | Post-Test Left Rear 3-4 View                                        | A-9             |
| Photo No. 018 | Pre-Test Windshield View                                            | A-9             |
| Photo No. 019 | Post-Test Windshield View                                           | A-10            |
| Photo No. 020 | Pre-Test Engine Compartment View                                    | A-10            |
| Photo No. 021 | Post-Test Engine Compartment View                                   | A-11            |
| Photo No. 022 | Pre-Test Fuel Filler Cap View                                       | A-11            |
| Photo No. 023 | Post-Test Fuel Filler Cap View                                      | A-12            |
| Photo No. 024 | Pre-Test Front Underbody View                                       | A-12            |
| Photo No. 025 | Post-Test Front Underbody View                                      | A-13            |
| Photo No. 026 | Pre-Test Rear Underbody View                                        | A-13            |
| Photo No. 027 | Post-Test Rear Underbody View                                       | A-14            |
| Photo No. 028 | Pre-Test Dummy Cable Routing                                        | A-14            |
| Photo No. 029 | Post-Test Dummy Cable Routing                                       | A-15            |

|               |                                                                | <u>Page No.</u> |
|---------------|----------------------------------------------------------------|-----------------|
| Photo No. 030 | Pre-Test Driver Dummy Front View                               | A-15            |
| Photo No. 031 | Post-Test Driver Dummy Front View                              | A-16            |
| Photo No. 032 | Pre-Test Driver Dummy Window View                              | A-16            |
| Photo No. 033 | Post-Test Driver Dummy Window View                             | A-17            |
| Photo No. 034 | Pre-Test Driver Dummy and Vehicle Interior View                | A-17            |
| Photo No. 035 | Post-Test Driver Dummy and Vehicle Interior View               | A-18            |
| Photo No. 036 | Pre-Test Driver's Seat Fore-Aft Markings                       | A-18            |
| Photo No. 037 | Post-Test Driver's Seat Fore-Aft Markings                      | A-19            |
| Photo No. 038 | Pre-Test View of Belt Anchorage for Driver Dummy               | A-19            |
| Photo No. 039 | Post-Test View of Belt Anchorage for Driver Dummy              | A-20            |
| Photo No. 040 | Pre-Test View of Belt Buckle and Latch Plate for Driver Dummy  | A-20            |
| Photo No. 041 | Post-Test View of Belt Buckle and Latch Plate for Driver Dummy | A-21            |
| Photo No. 042 | Pre-Test Driver Dummy Feet                                     | A-21            |
| Photo No. 043 | Post-Test Driver Dummy Feet                                    | A-22            |
| Photo No. 044 | Pre-Test Driver's Side Knee Bolster                            | A-22            |
| Photo No. 045 | Post-Test Driver's Side Knee Bolster                           | A-23            |
| Photo No. 046 | Pre-Test Driver's Side Floorpan                                | A-23            |
| Photo No. 047 | Post-Test Driver's Side Floorpan                               | A-24            |
| Photo No. 048 | Post-Test Driver Dummy Face                                    | A-24            |
| Photo No. 049 | Post-Test Driver Dummy Contact with Airbag                     | A-25            |
| Photo No. 050 | Post-Test Driver Dummy Contact with Headrest                   | A-25            |
| Photo No. 051 | Pre-Test View of the Steering Wheel                            | A-26            |
| Photo No. 052 | Post-Test View of the Steering Wheel                           | A-26            |
| Photo No. 053 | Pre-Test Passenger Dummy Front View                            | A-27            |
| Photo No. 054 | Post-Test Passenger Dummy Front View                           | A-27            |
| Photo No. 055 | Pre-Test Passenger Dummy Window View                           | A-28            |
| Photo No. 056 | Post-Test Passenger Dummy Window View                          | A-28            |
| Photo No. 057 | Pre-Test Passenger Dummy and Vehicle Interior                  | A-29            |
| Photo No. 058 | Post-Test Passenger Dummy and Vehicle Interior                 | A-29            |
| Photo No. 059 | Pre-Test Passenger's Seat Fore-Aft Markings                    | A-30            |

|                  |                                                                     | <u>Page No.</u> |
|------------------|---------------------------------------------------------------------|-----------------|
| Photo No. 060    | Post-Test Passenger's Seat Fore-Aft Markings                        | A-30            |
| Photo No. 061    | Pre-Test View of Belt Anchorage for Passenger Dummy                 | A-31            |
| Photo No. 062    | Post-Test View of Belt Anchorage for Passenger Dummy                | A-31            |
| Photo No. 063    | Pre-Test View of Belt Buckle and Latch Plate for Passenger Dummy    | A-32            |
| Photo No. 064    | Post-Test View of Belt Buckle and Latch Plate for Passenger Dummy   | A-32            |
| Photo No. 065    | Pre-Test Passenger Dummy Feet                                       | A-33            |
| Photo No. 066    | Post-Test Passenger Dummy Feet                                      | A-33            |
| Photo No. 067    | Pre-Test Passenger's Side Knee Bolster                              | A-34            |
| Photo No. 068    | Post-Test Passenger's Side Knee Bolster                             | A-34            |
| Photo No. 069    | Pre-Test Passenger's Side Floorpan                                  | A-35            |
| Photo No. 070    | Post-Test Passenger's Side Floorpan                                 | A-35            |
| Photo No. 071    | Post-Test Passenger Dummy Face                                      | A-36            |
| Photo No. 072    | Post-Test Passenger Dummy Contact with Airbag                       | A-36            |
| Photo No. 073    | Post-Test Passenger Dummy Contact with Headrest                     | A-37            |
| Photo No. 074    | Photograph of Ballast Installed in Vehicle                          | A-37            |
| Photo No. 075    | Post-Test Stoddard Solvent Spillage Location View                   | A-38            |
| Photo No. 076    | Post-Test Speed Trap Read-Out                                       | A-38            |
| Photo No. 077    | Vehicle at 0 Degree on Static Rollover Device                       | A-39            |
| Photo No. 078    | Vehicle at 90 Degrees on Static Rollover Device                     | A-39            |
| Photo No. 079    | Vehicle at 180 Degrees on Static Rollover Device                    | A-40            |
| Photo No. 080    | Vehicle at 270 Degrees on Static Rollover Device                    | A-40            |
| Photo No. 081    | Vehicle at 360 Degrees on Static Rollover Device                    | A-41            |
| Photo No. 082    | 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV Frontal Impact Event | A-41            |
| Photo No. 083    | Monroney Label Photograph                                           | A-42            |
| Photo No. 305-01 | Auxiliary Power Module Warning Label                                | A-42            |
| Photo No. 305-02 | Power Inverter Warning Label                                        | A-43            |
| Photo No. 305-03 | First Responder Warning Label                                       | A-43            |
| Photo No. 305-04 | First Responder Warning Location                                    | A-44            |
| Photo No. 305-05 | Other Vehicle Label(s) Related to Electrical Propulsion System      | A-44            |
| Photo No. 305-06 | Manual High Voltage Service Disconnect in Place                     | A-45            |

|                  |                                                                                           | <u>Page No.</u> |
|------------------|-------------------------------------------------------------------------------------------|-----------------|
| Photo No. 305-07 | Manual High Voltage Service Disconnect Removed                                            | A-45            |
| Photo No. 305-08 | Manual High Voltage Service Disconnect Removed                                            | A-46            |
| Photo No. 305-09 | Pre-Impact View of Propulsion Battery                                                     | A-46            |
| Photo No. 305-10 | Post-Impact Front View of Propulsion Battery                                              | A-47            |
| Photo No. 305-11 | Post-Impact Rear View of Propulsion Battery                                               | A-47            |
| Photo No. 305-12 | Pre-Impact View of Battery Box(s) or Container(s) Which Holds Individual Battery Modules  | A-48            |
| Photo No. 305-13 | Post-Impact View of Battery Box(s) or Container(s) Which Holds Individual Battery Modules | A-48            |
| Photo No. 305-14 | Pre-Impact View of Propulsion Battery Module(s)                                           | A-49            |
| Photo No. 305-15 | Post-Impact View of Propulsion Battery Module(s)                                          | A-49            |
| Photo No. 305-16 | Pre-Impact View of Electric Propulsion Drive                                              | A-50            |
| Photo No. 305-17 | Post-Impact View of Electric Propulsion Drive                                             | A-50            |
| Photo No. 305-18 | Pre-Impact View of High Voltage Interconnect(s)                                           | A-51            |
| Photo No. 305-19 | Pre-Impact View Propulsion Battery Venting System(s)                                      | A-51            |
| Photo No. 305-20 | Pre-Impact View of Other Visible Electric Propulsion Components                           | A-52            |
| Photo No. 305-21 | Pre-Impact View of Ground Lead Attached                                                   | A-52            |
| Photo No. 305-22 | Pre-Impact View of High Voltage Leads Attached                                            | A-53            |
| Photo No. 305-23 | Pre-Impact Close-Up View of High Voltage Leads Attached                                   | A-53            |
| Photo No. 305-24 | Pre-Impact View of Installed Test Interface Port                                          | A-54            |
| Photo No. 305-25 | Post-Impact View of Installed Test Interface Port                                         | A-54            |
| Photo No. 305-26 | Pre-Impact View of Other Test Devices                                                     | A-55            |
| Photo No. 305-27 | Post-Impact View of Other Test Devices                                                    | A-55            |
| Photo No. 305-28 | FMVSS No. 305 Static Rollover at 90 Degrees                                               | A-56            |
| Photo No. 305-29 | FMVSS No. 305 Static Rollover at 180 Degrees                                              | A-56            |
| Photo No. 305-30 | FMVSS No. 305 Static Rollover at 270 Degrees                                              | A-57            |
| Photo No. 305-31 | FMVSS No. 305 Static Rollover at 360 Degrees                                              | A-57            |
| Photo No. 305-32 | Pre-Impact View of the Vehicle Passenger Compartment Adjacent to Propulsion Battery       | A-58            |
| Photo No. 305-33 | Post-Impact View of the Vehicle Passenger Compartment Adjacent to Propulsion Battery      | A-58            |
| Photo No. 305-34 | Post-Impact Propulsion Battery System Mounting and/or Intrusion Failure(s)                | A-59            |

Page No.

|                  |                                                                      |      |
|------------------|----------------------------------------------------------------------|------|
| Photo No. 305-35 | Post-Impact View of Battery Component Intrusion                      | A-59 |
| Photo No. 305-36 | Post-Impact View of Battery Module Movement or Retention Loss        | A-60 |
| Photo No. 305-37 | Post-Impact View of Propulsion Battery Electrolyte Spillage Location | A-60 |
| Photo No. 305-38 | Post-Test View of Propulsion Battery Electrolyte Spillage Location   | A-61 |

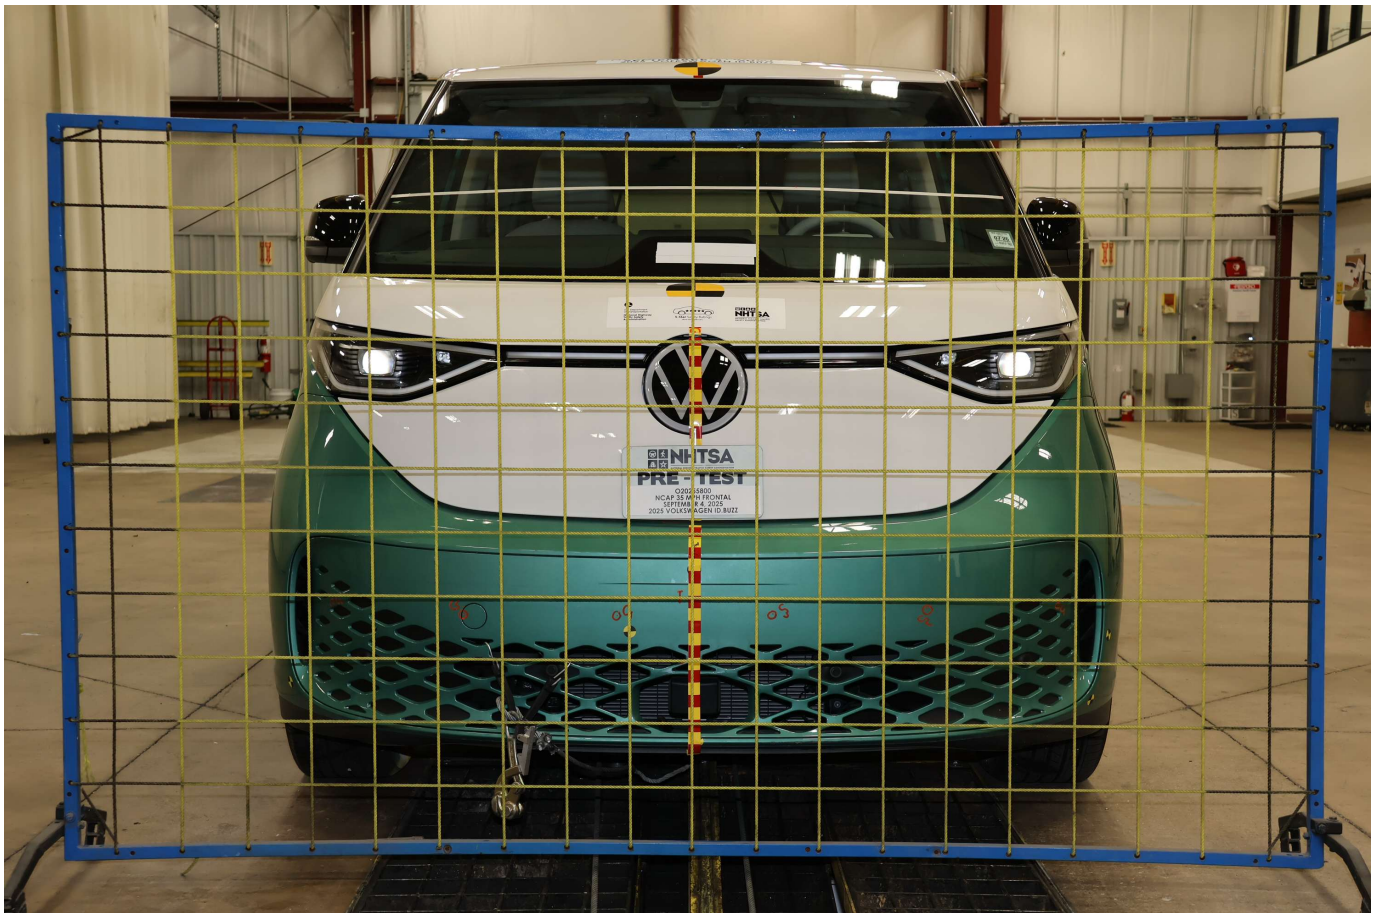


Photo No. 001 - Load Cell Location



Photo No. 002 - Pre-Test Load Cell Wall





Photo No. 003 - Post-Test Load Cell Wall

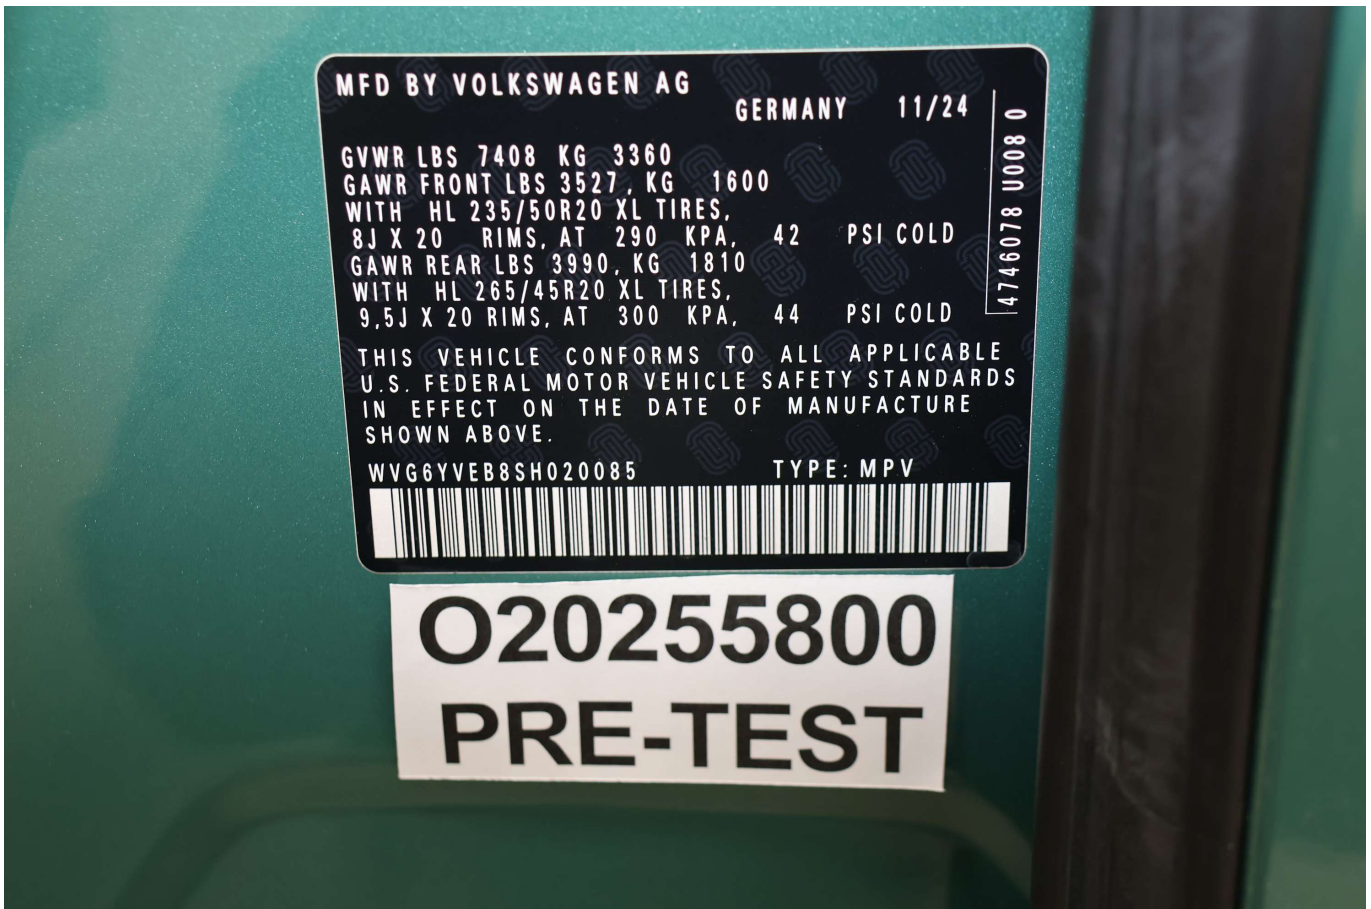


Photo No. 004 - Manufacturer's Label



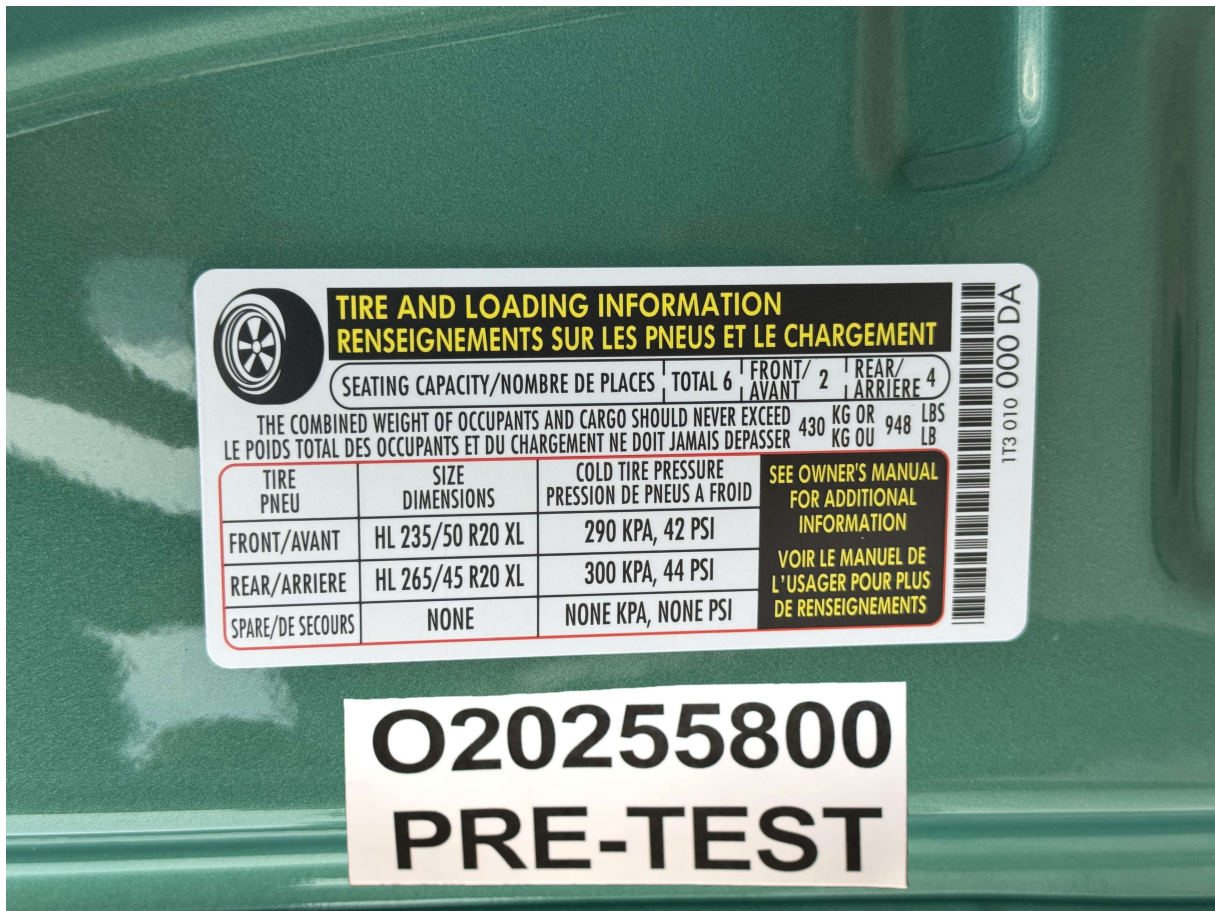


Photo No. 005 - Tire Placard



Photo No. 006 - 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV Frontal As Delivered





Photo No. 007 - Left Rear 3-4 View, As Received



Photo No. 008 - Pre-Test Front View of Test Vehicle



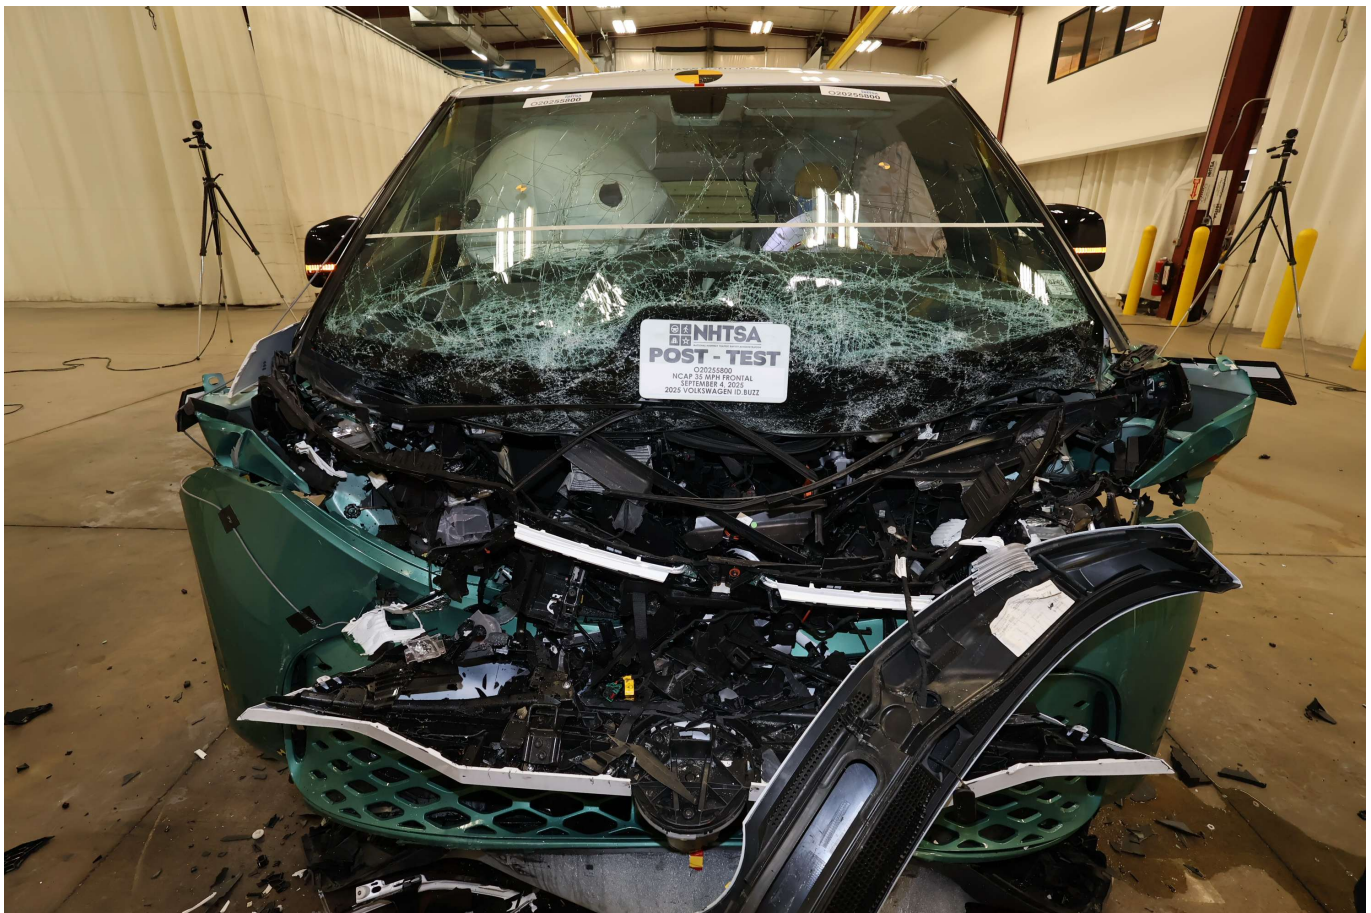


Photo No. 009 - Post-Test Front View of Test Vehicle



Photo No. 010 - Pre-Test Left View of Test Vehicle





Photo No. 011 - Post-Test Left View of Test Vehicle



Photo No. 012 - Pre-Test Right View of Test Vehicle





Photo No. 013 - Post-Test Right View of Test Vehicle



Photo No. 014 - Pre-Test Right Front 3-4 View





Photo No. 015 - Post-Test Right Front 3-4 View



Photo No. 016 - Pre-Test Left Rear 3-4 View





Photo No. 017 - Post-Test Left Rear 3-4 View



Photo No. 018 - Pre-Test Windshield View





Photo No. 019 - Post-Test Windshield View



Photo No. 020 - Pre-Test Engine Compartment View





Photo No. 021 - Post-Test Engine Compartment View

**PHOTOGRAPH NOT APPLICABLE**

Photo No. 022 - Pre-Test Fuel Filler Cap View

**PHOTOGRAPH NOT APPLICABLE**

Photo No. 023 - Post-Test Fuel Filler Cap View

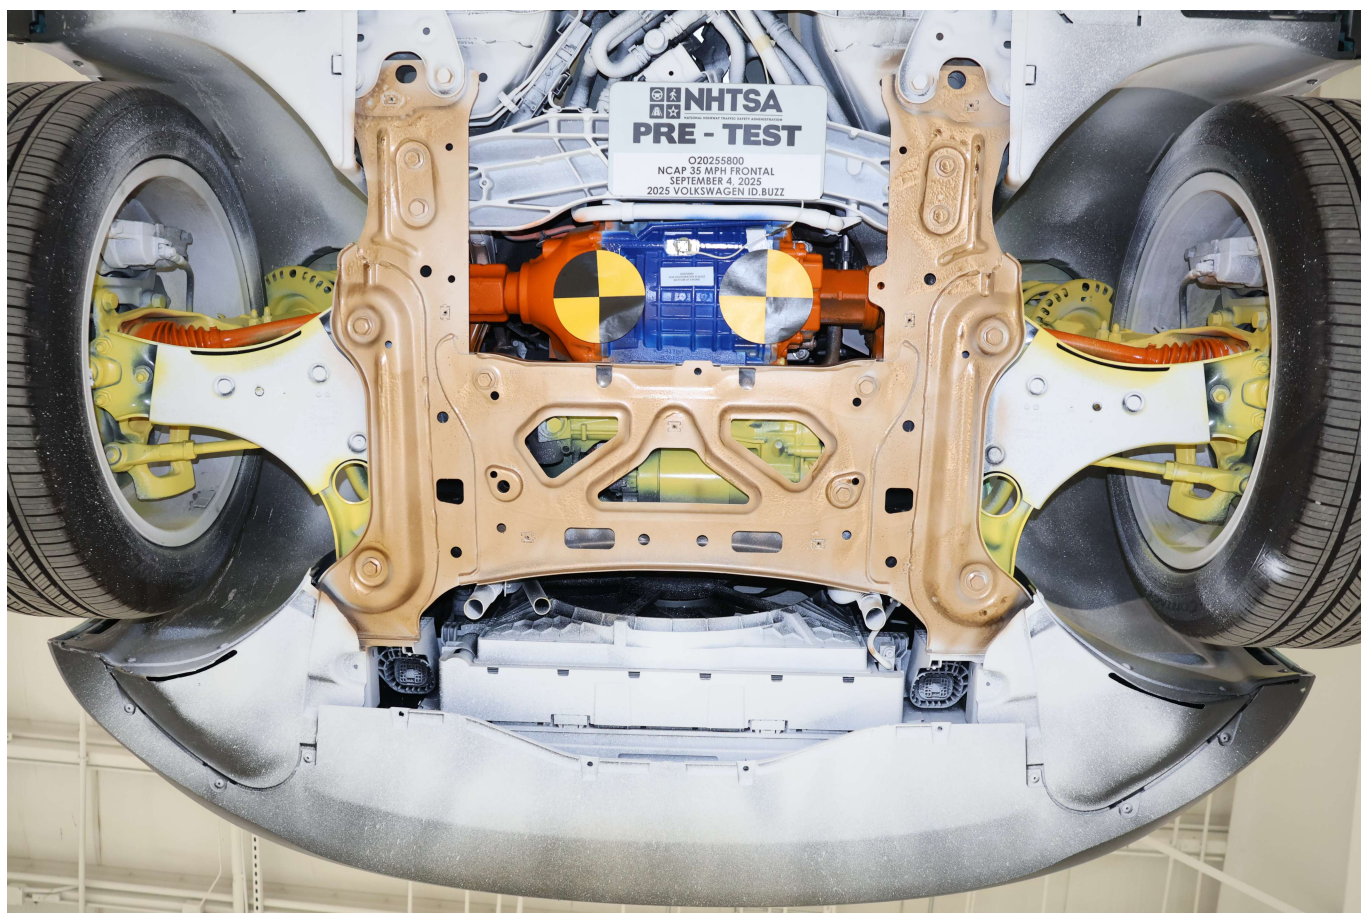


Photo No. 024 - Pre-Test Front Underbody View





Photo No. 025 - Post-Test Front Underbody View

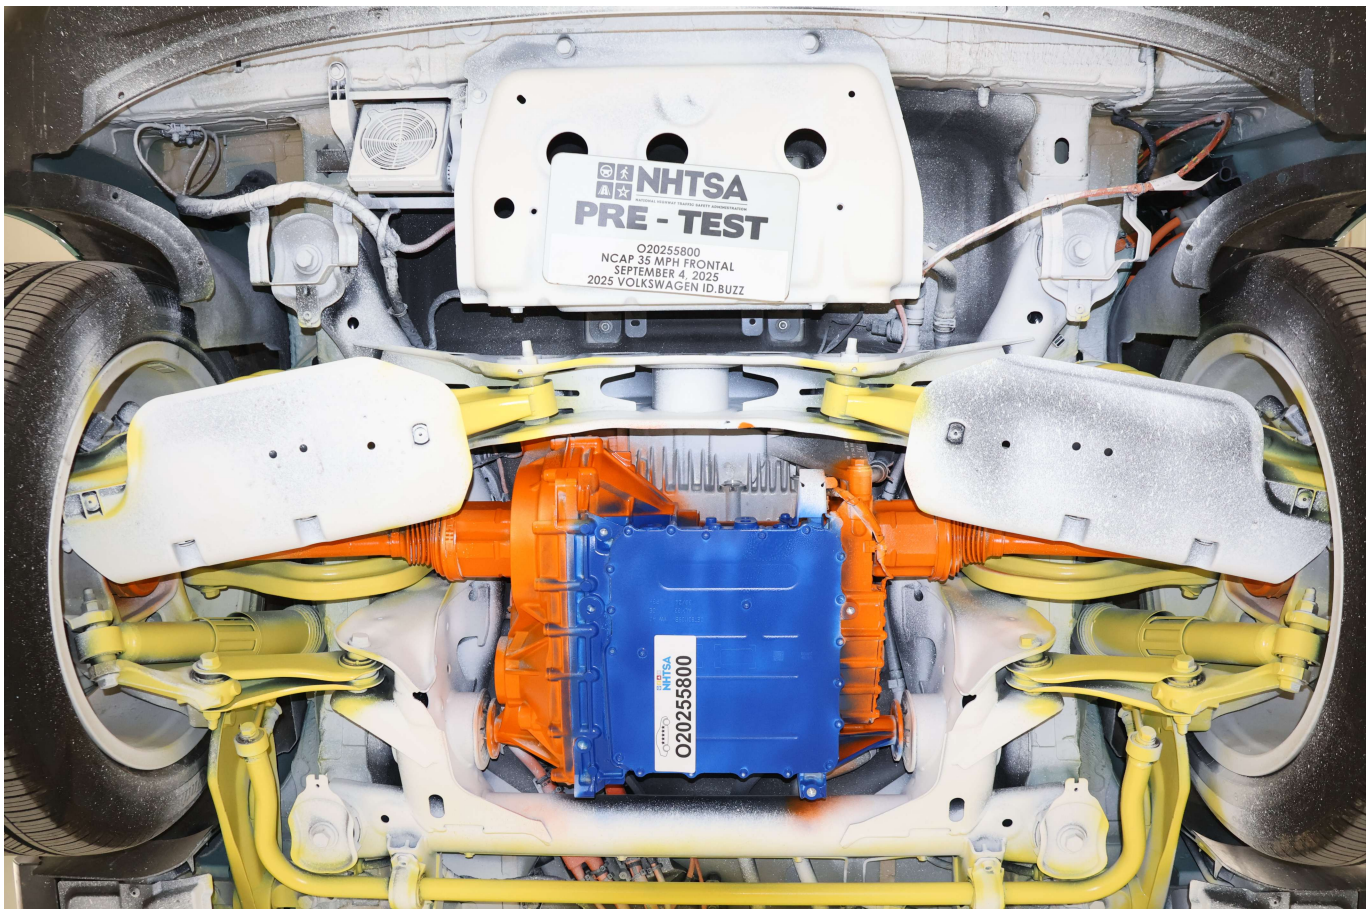


Photo No. 026 - Pre-Test Rear Underbody View



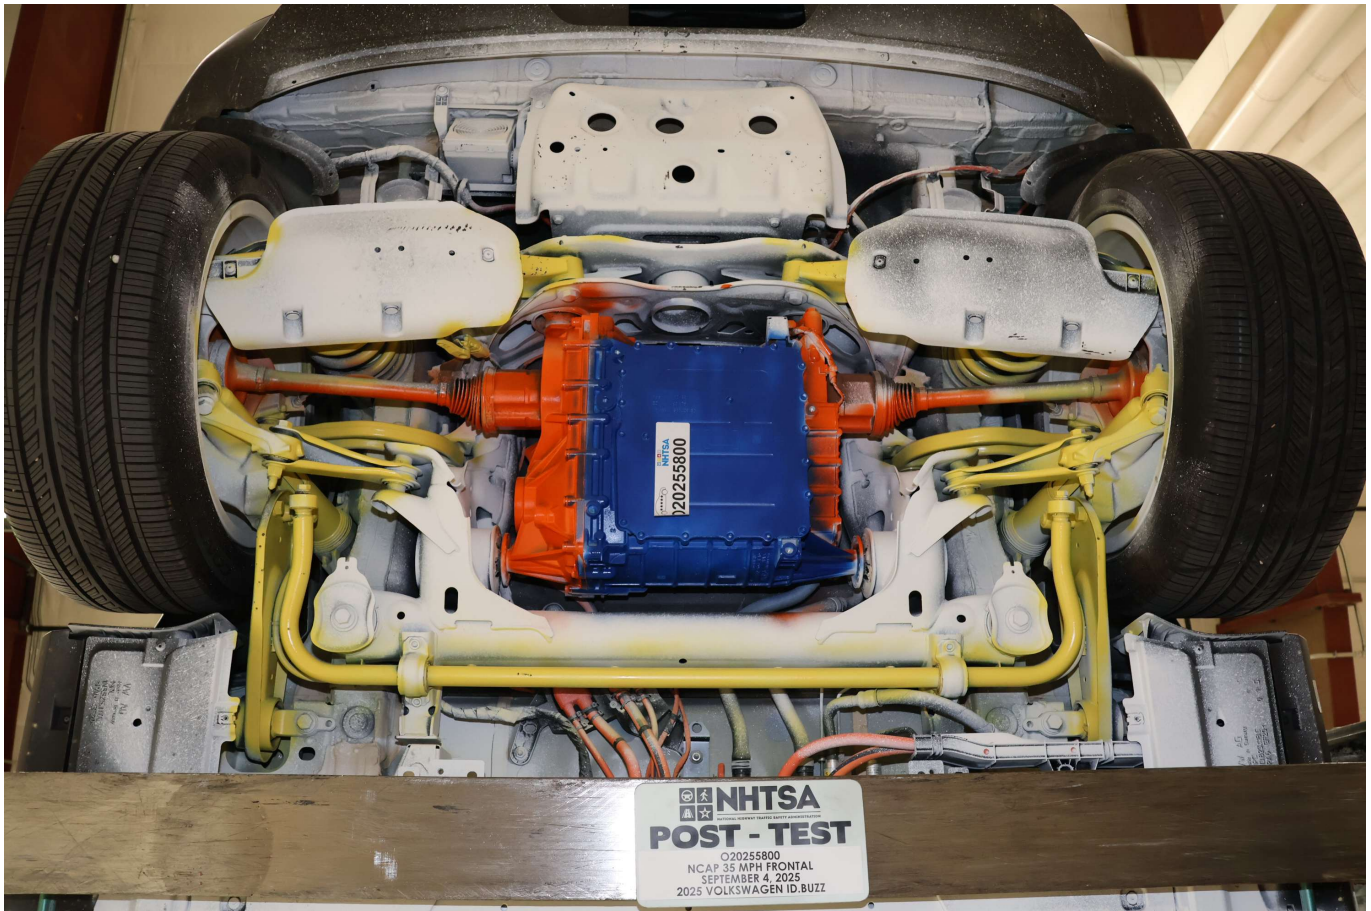


Photo No. 027 - Post-Test Rear Underbody View



Photo No. 028 - Pre-Test Dummy Cable Routing





Photo No. 029 - Post-Test Dummy Cable Routing



Photo No. 030 - Pre-Test Driver Dummy Front View





Photo No. 031 - Post-Test Driver Dummy Front View



Photo No. 032 - Pre-Test Driver Dummy Window View



Photo No. 033 - Post-Test Driver Dummy Window View



Photo No. 034 - Pre-Test Driver Dummy and Vehicle Interior View





Photo No. 035 - Post-Test Driver Dummy and Vehicle Interior View



Photo No. 036 - Pre-Test Driver's Seat Fore-Aft Markings



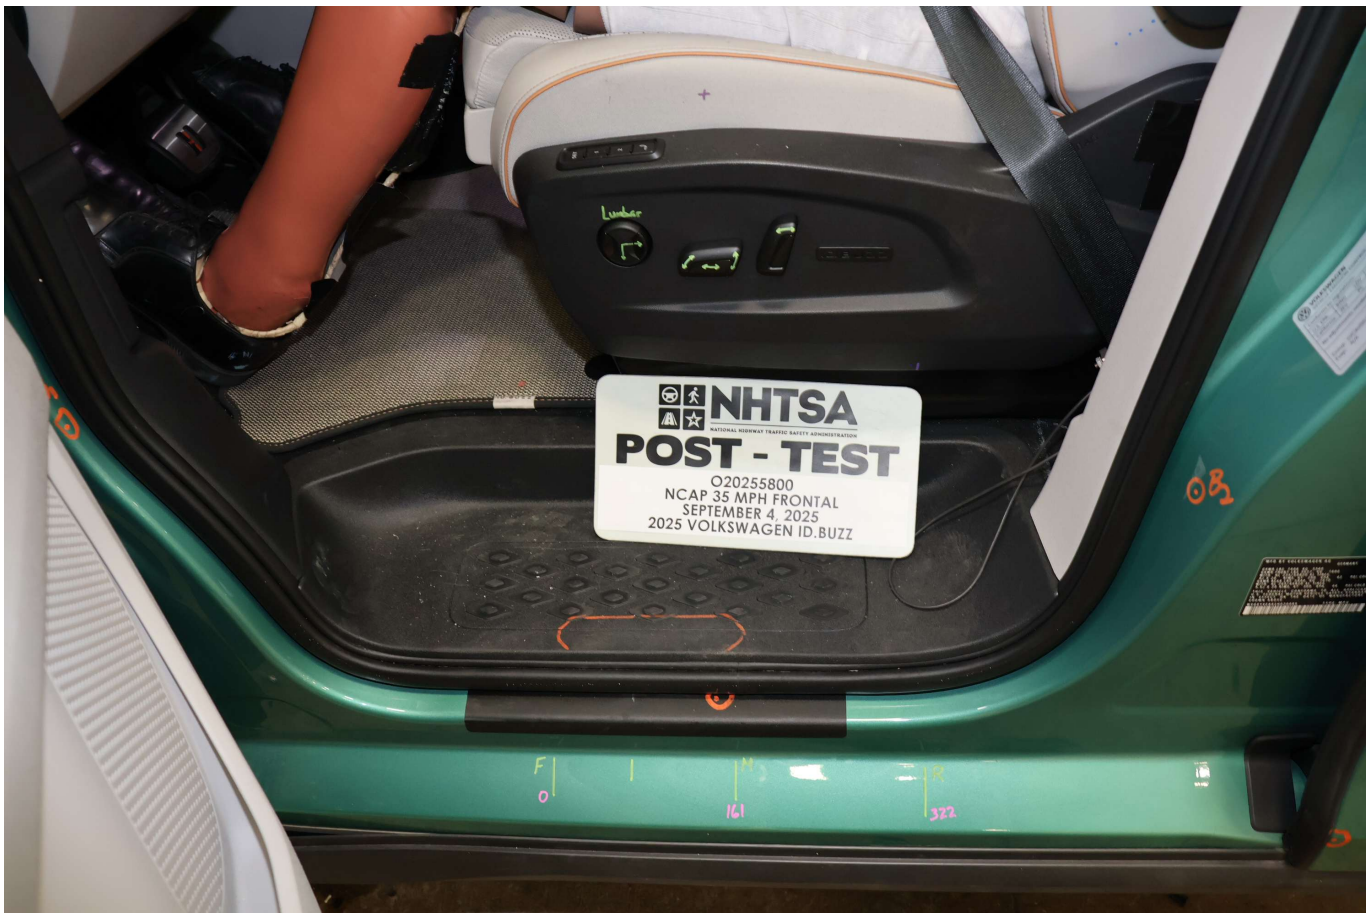


Photo No. 037 - Post-Test Driver's Seat Fore-Aft Markings



Photo No. 038 - Pre-Test View of Belt Anchorage for Driver Dummy





Photo No. 039 - Post-Test View of Belt Anchorage for Driver Dummy



Photo No. 040 - Pre-Test View of Belt Buckle and Latch Plate for Driver Dummy





Photo No. 041 - Post-Test View of Belt Buckle and Latch Plate for Driver Dummy



Photo No. 042 - Pre-Test Driver Dummy Feet





Photo No. 043 - Post-Test Driver Dummy Feet



Photo No. 044 - Pre-Test Driver's Side Knee Bolster





Photo No. 045 - Post-Test Driver's Side Knee Bolster



Photo No. 046 - Pre-Test Driver's Side Floorpan





Photo No. 047 - Post-Test Driver's Side Floorpan



Photo No. 048 - Post-Test Driver Dummy Face

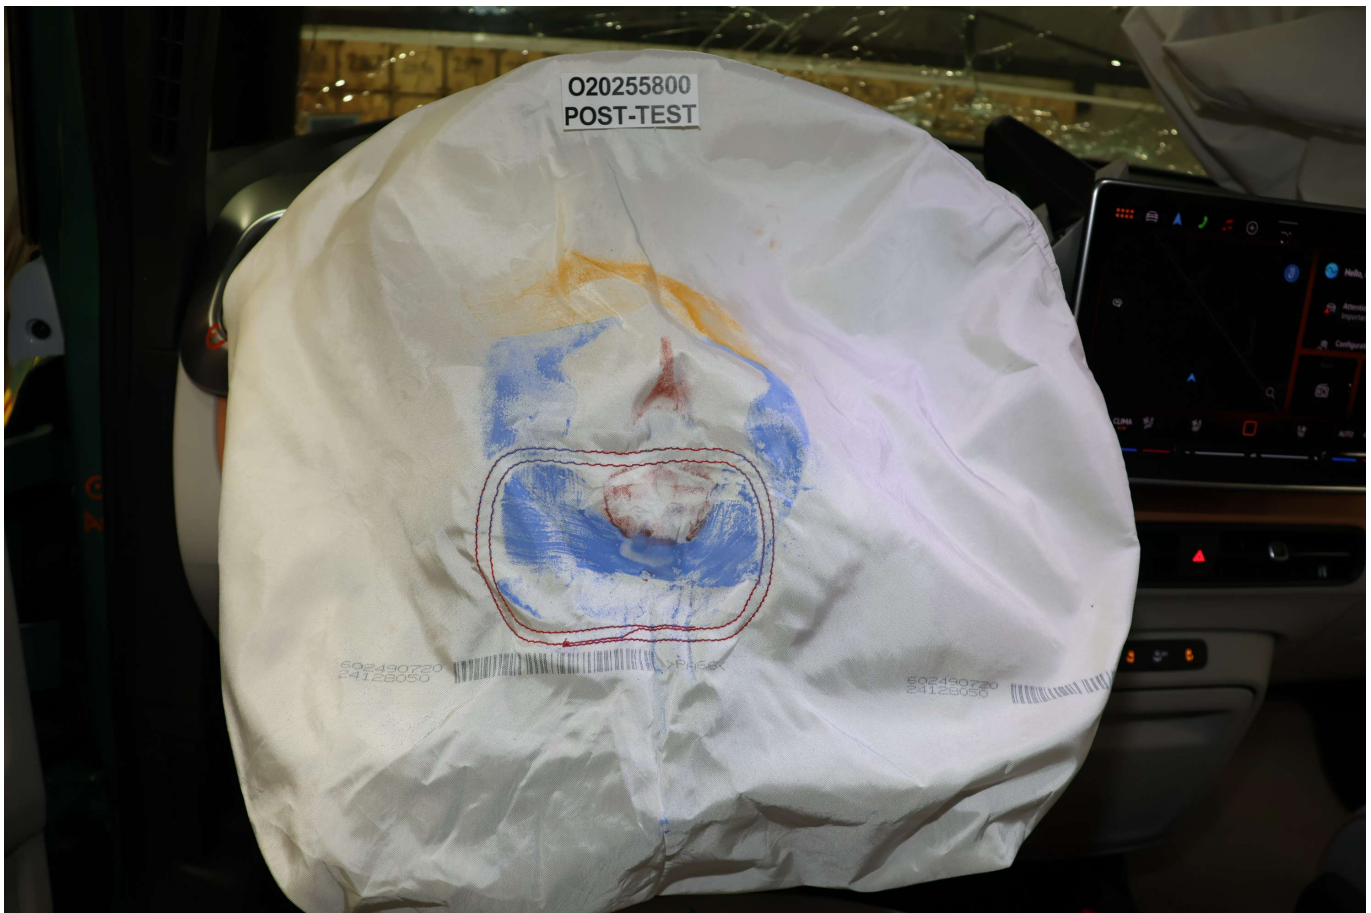


Photo No. 049 - Post-Test Driver Dummy Contact with Airbag

**PHOTOGRAPH NOT APPLICABLE**

Photo No. 050 - Post-Test Driver Dummy Contact with Headrest





Photo No. 051 - Pre-Test View of the Steering Wheel



Photo No. 052 - Post-Test View of the Steering Wheel





Photo No. 053 - Pre-Test Passenger Dummy Front View



Photo No. 054 - Post-Test Passenger Dummy Front View



Photo No. 055 - Pre-Test Passenger Dummy Window View



Photo No. 056 - Post-Test Passenger Dummy Window View





Photo No. 057 - Pre-Test Passenger Dummy and Vehicle Interior View



Photo No. 058 - Post-Test Passenger Dummy and Vehicle Interior View





Photo No. 059 - Pre-Test Passenger's Seat Fore-Aft Markings



Photo No. 060 - Post-Test Passenger's Seat Fore-Aft Markings





Photo No. 061 - Pre-Test View of Belt Anchorage for Passenger Dummy



Photo No. 062 - Post-Test View of Belt Anchorage for Passenger Dummy

**PHOTOGRAPH NOT AVAILABLE**

Photo No. 063 - Pre-Test View of Belt Buckle and Latch Plate for Passenger Dummy



Photo No. 064 - Post-Test View of Belt Buckle and Latch Plate for Passenger Dummy





Photo No. 065 - Pre-Test Passenger Dummy Feet

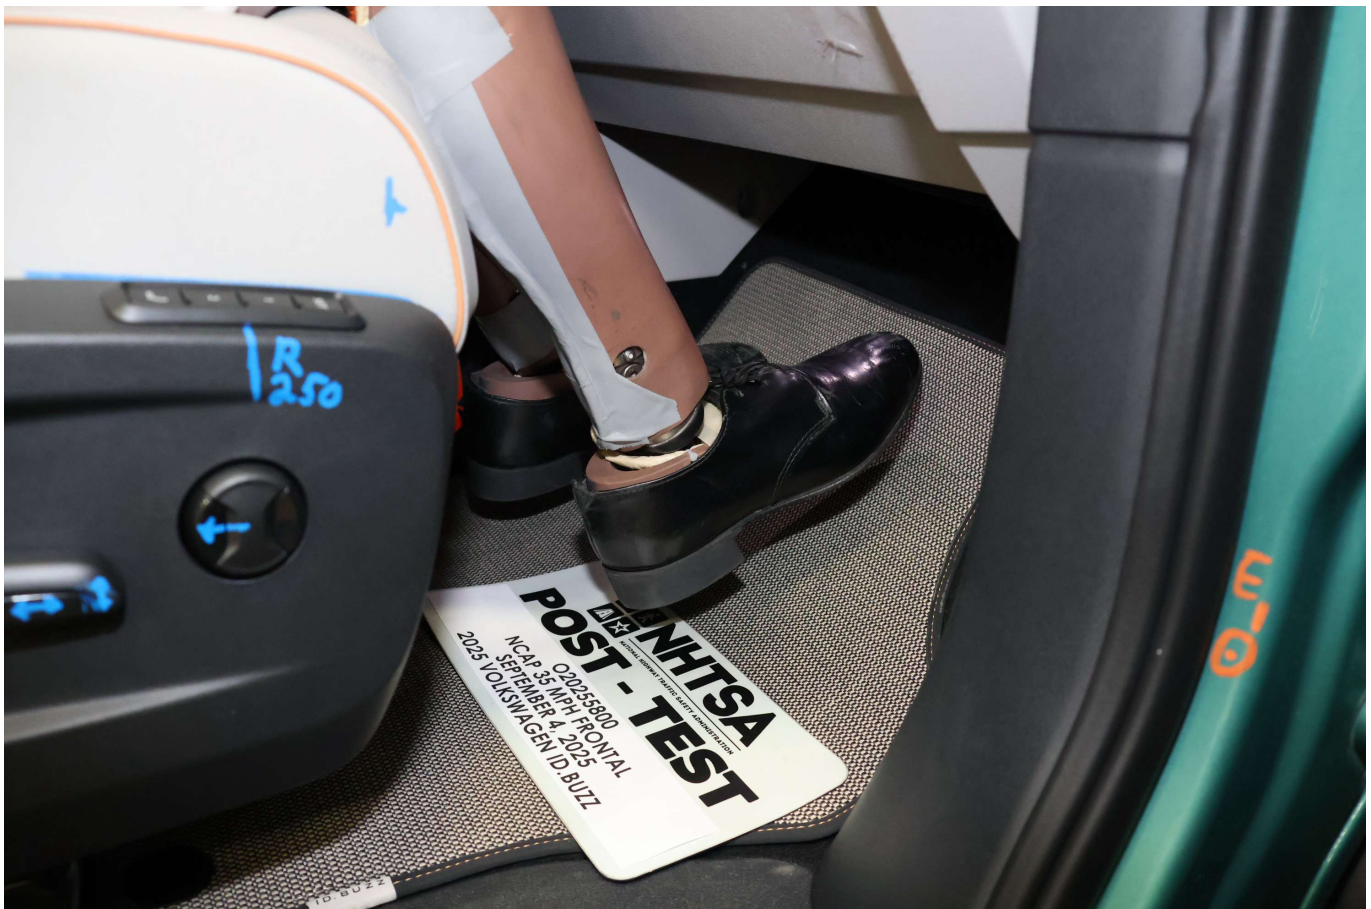


Photo No. 066 - Post-Test Passenger Dummy Feet





Photo No. 067 - Pre-Test Passenger's Side Knee Bolster



Photo No. 068 - Post-Test Passenger's Side Knee Bolster





Photo No. 069 - Pre-Test Passenger's Side Floorpan

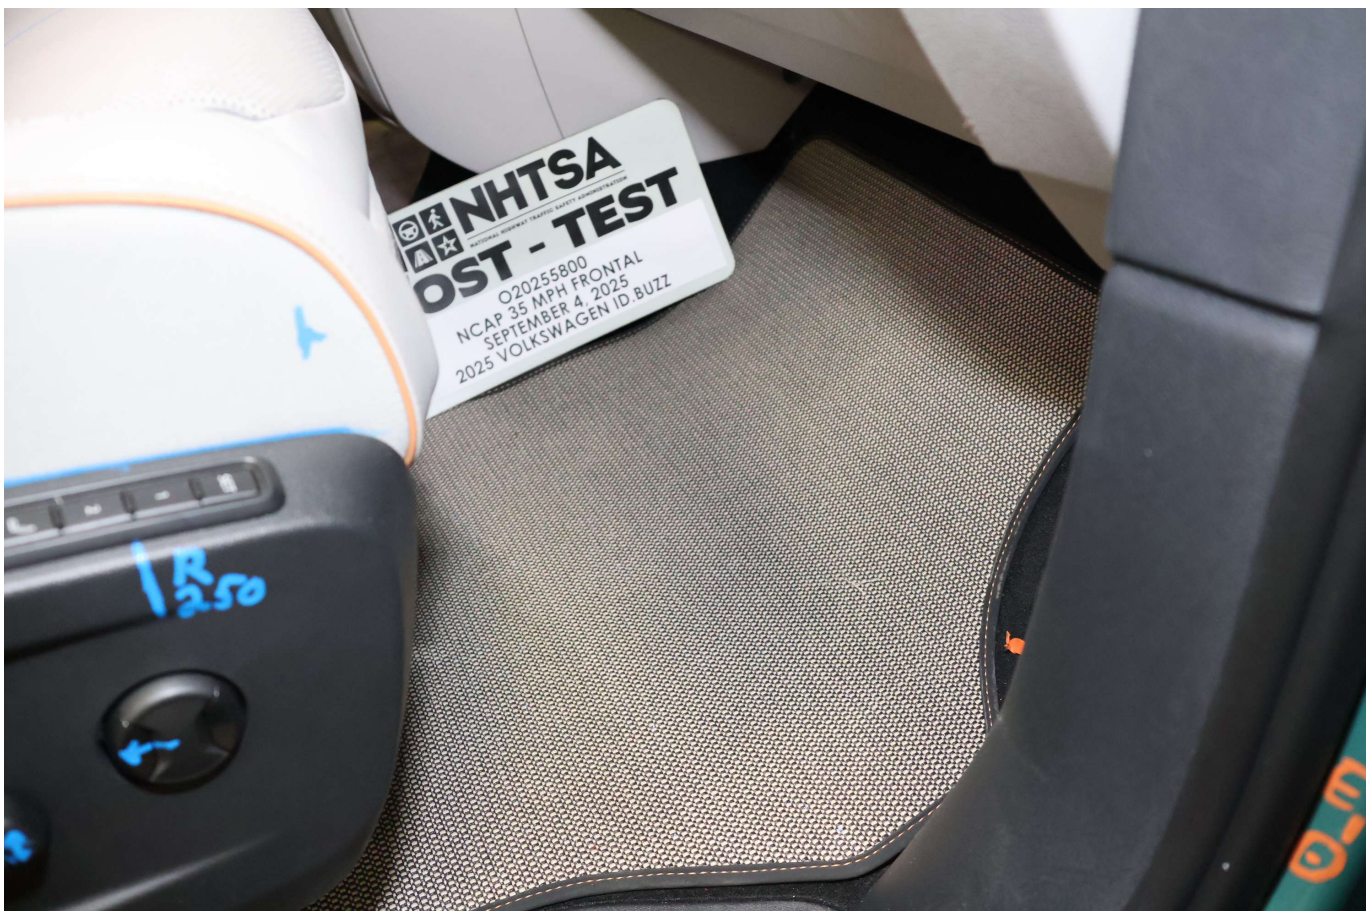


Photo No. 070 - Post-Test Passenger's Side Floorpan





Photo No. 071 - Post-Test Passenger Dummy Face



Photo No. 072 - Post-Test Passenger Dummy Contact with Airbag





Photo No. 073 - Post-Test Passenger Dummy Contact with Headrest



Photo No. 074 - Photograph of Ballast Installed in Vehicle

# PHOTOGRAPH NOT APPLICABLE

Photo No. 075 - Post-Test Stoddard Solvent Spillage Location View



Photo No. 076 - Post-Test Speed Trap Read-Out



**PHOTOGRAPH NOT APPLICABLE**

Photo No. 077 - Vehicle at 0 Degrees on Static Rollover Device

**PHOTOGRAPH NOT APPLICABLE**

Photo No. 078 - Vehicle at 90 Degrees on Static Rollover Device

**PHOTOGRAPH NOT APPLICABLE**

Photo No. 079 - Vehicle at 180 Degrees on Static Rollover Device

**PHOTOGRAPH NOT APPLICABLE**

Photo No. 080 - Vehicle at 270 Degrees on Static Rollover Device

# PHOTOGRAPH NOT APPLICABLE

Photo No. 081 - Vehicle at 360 Degrees on Static Rollover Device



Photo No. 082 - 2025 Volkswagen ID.Buzz 1st Edition 5-Door SUV Frontal Impact Event





# PHOTOGRAPH NOT APPLICABLE

Photo No. 305-02 - Power Inverter Warning Label



Photo No. 305-03 - First Responder Warning Label





Photo No. 305-04 - First Responder Warning Location

**PHOTOGRAPH NOT APPLICABLE**

Photo No. 305-05 - Other Vehicle Label(s) Related to Electrical Propulsion System





Photo No. 305-06 - Manual High Voltage Service Disconnect in Place

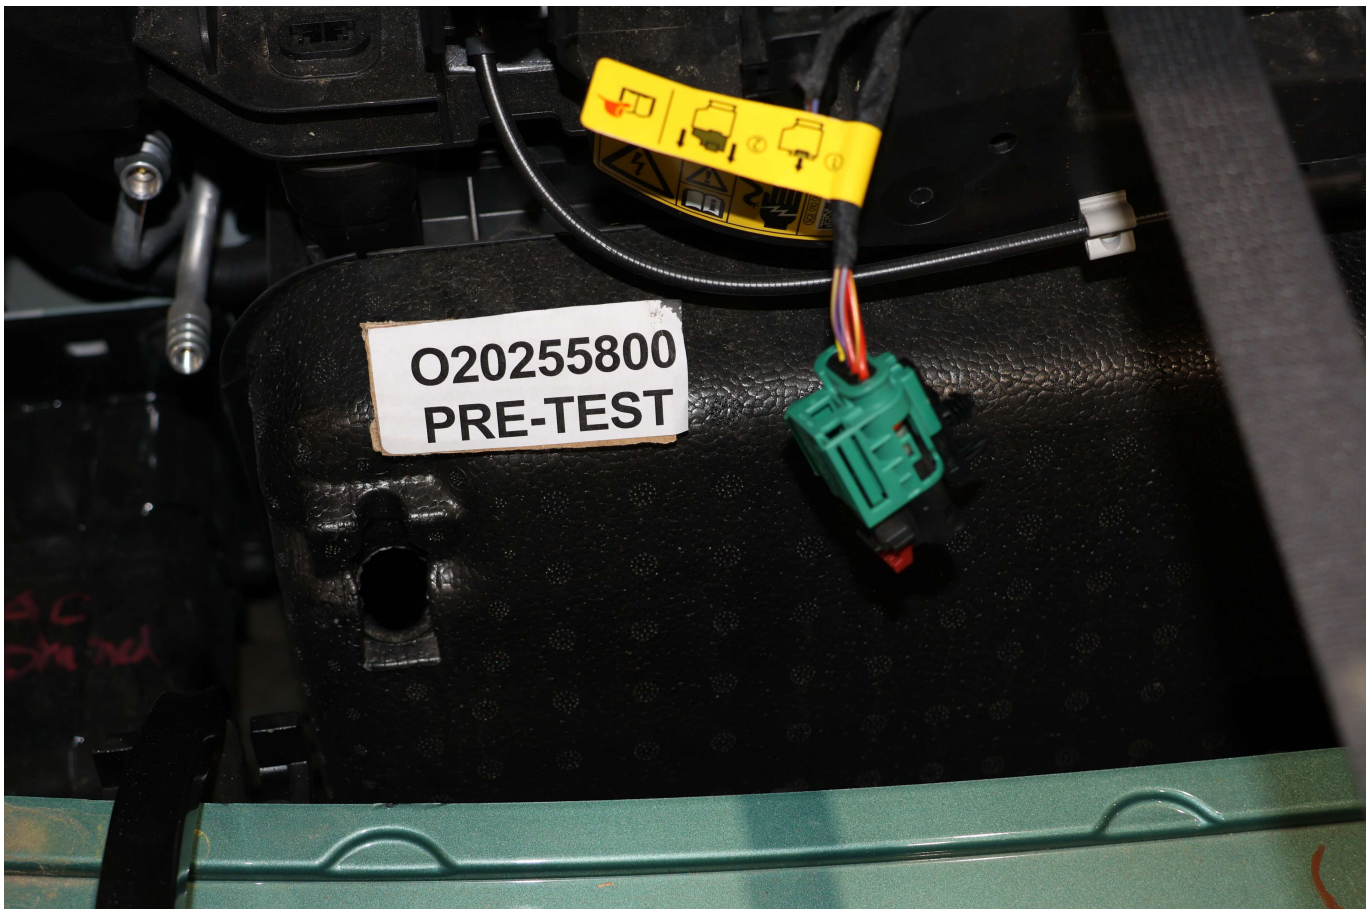


Photo No. 305-07 - Manual High Voltage Service Disconnect Removed

**PHOTOGRAPH NOT APPLICABLE**

Photo No. 305-08 - Manual High Voltage Service Disconnect Removed

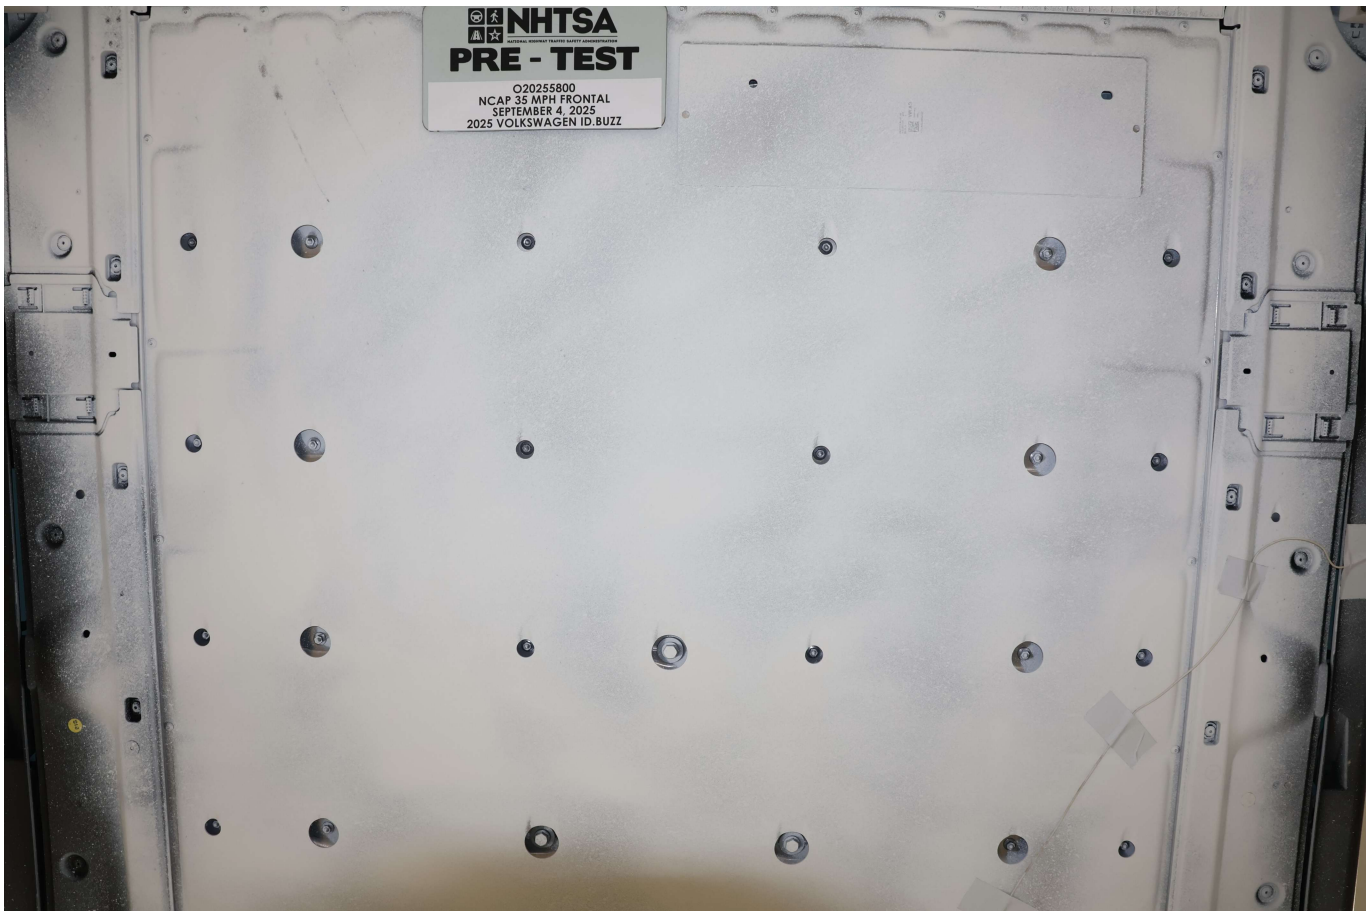


Photo No. 305-09 - Pre-Impact View of Propulsion Battery



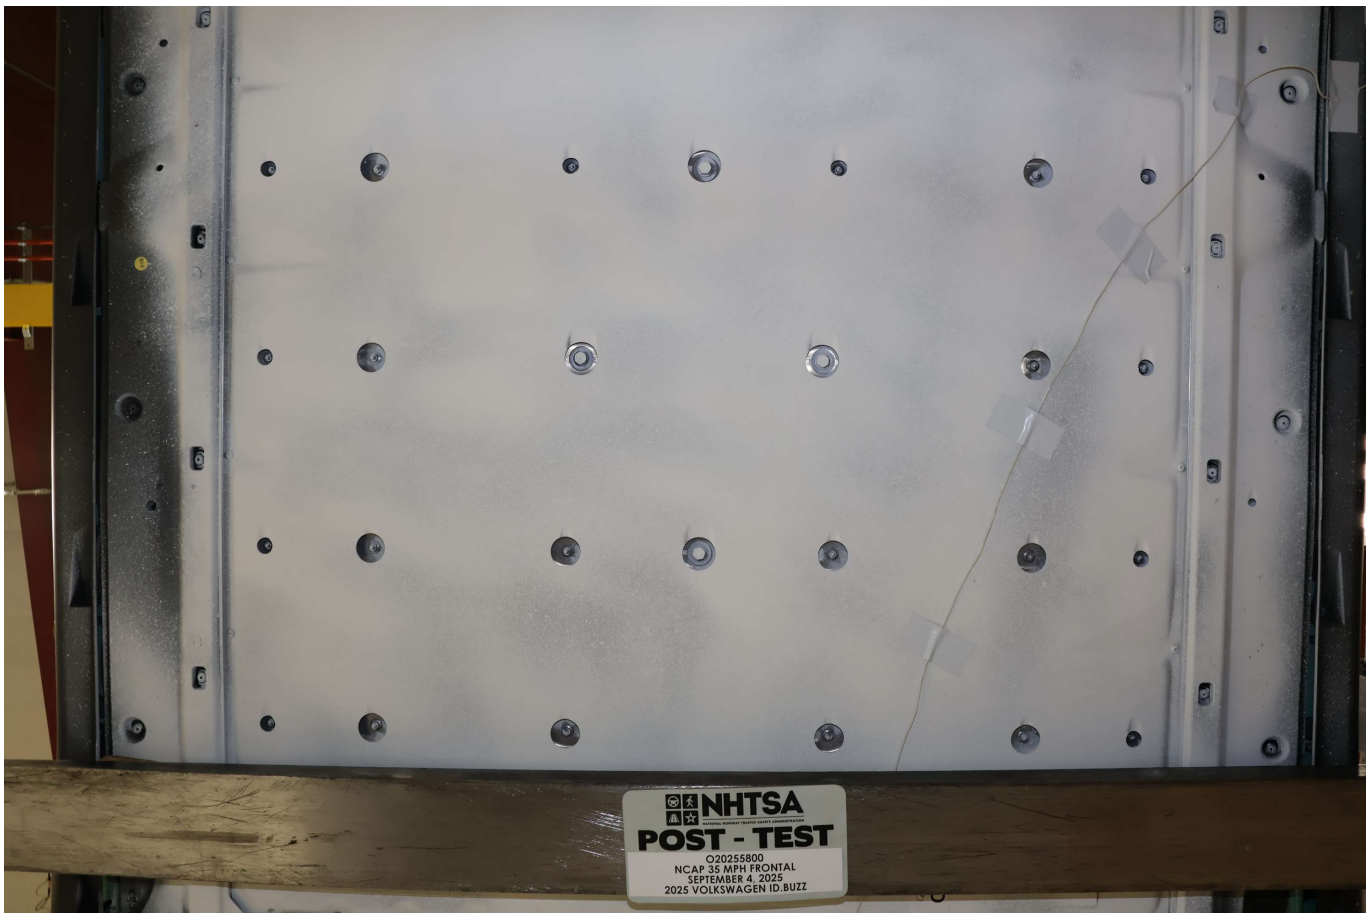


Photo No. 305-10 - Post-Impact Front View of Propulsion Battery



Photo No. 305-11 - Post-Impact Rear View of Propulsion Battery



**PHOTOGRAPH NOT AVAILABLE**

Photo No. 305-12 - Pre-Impact View of Battery Box(s) or Container(s) Which Holds Individual Battery Modules

**PHOTOGRAPH NOT AVAILABLE**

Photo No. 305-13 - Post-Impact View of Battery Box(s) or Container(s) Which Holds Individual Battery Modules

**PHOTOGRAPH NOT AVAILABLE**

Photo No. 305-14 - Pre-Impact View of Propulsion Battery Module(s)

**PHOTOGRAPH NOT AVAILABLE**

Photo No. 305-15 - Post-Impact View of Propulsion Battery Module(s)

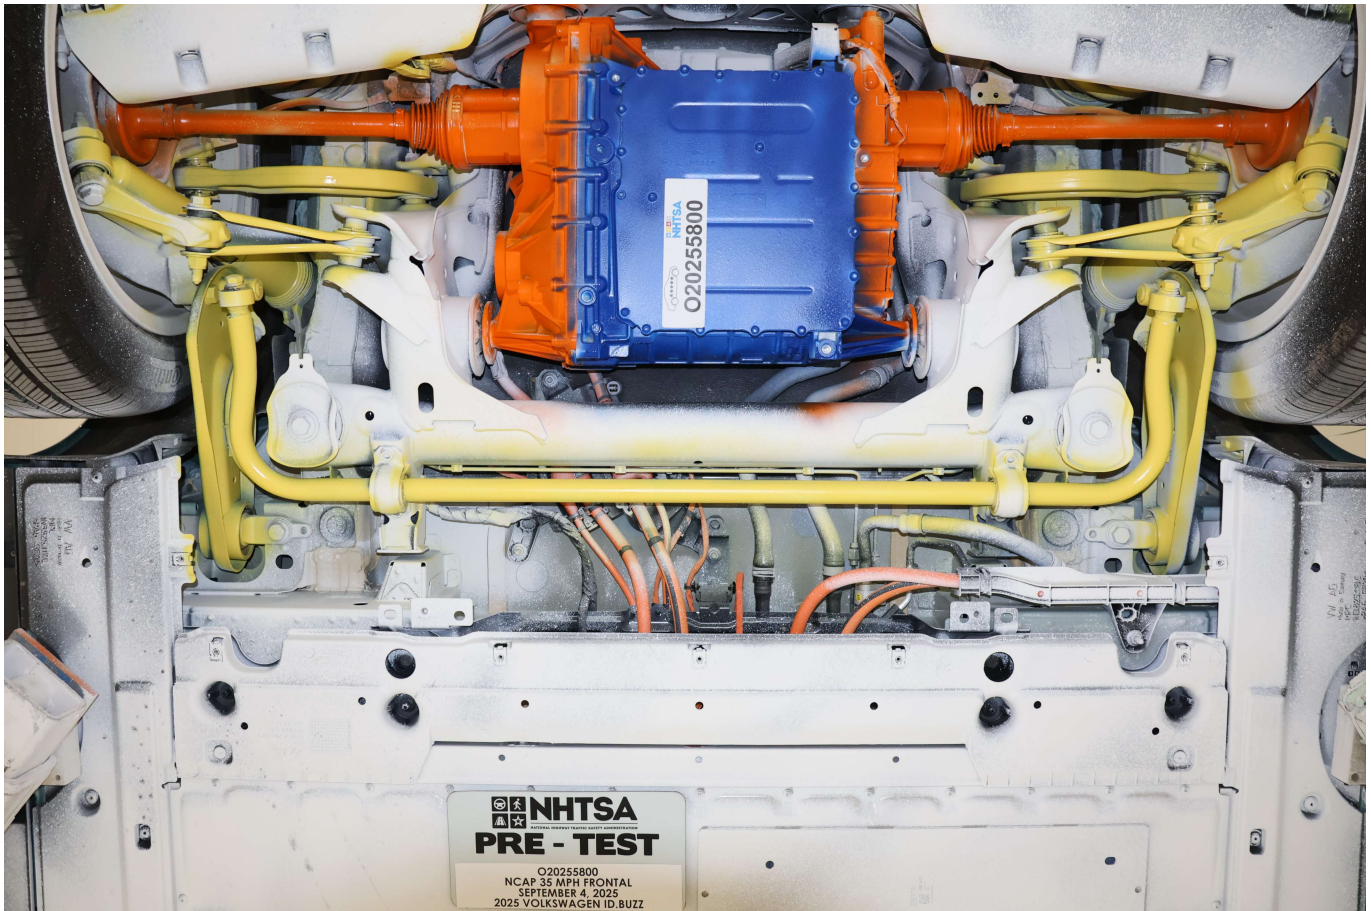


Photo No. 305-16 - Pre-Impact View of Electric Propulsion Drive

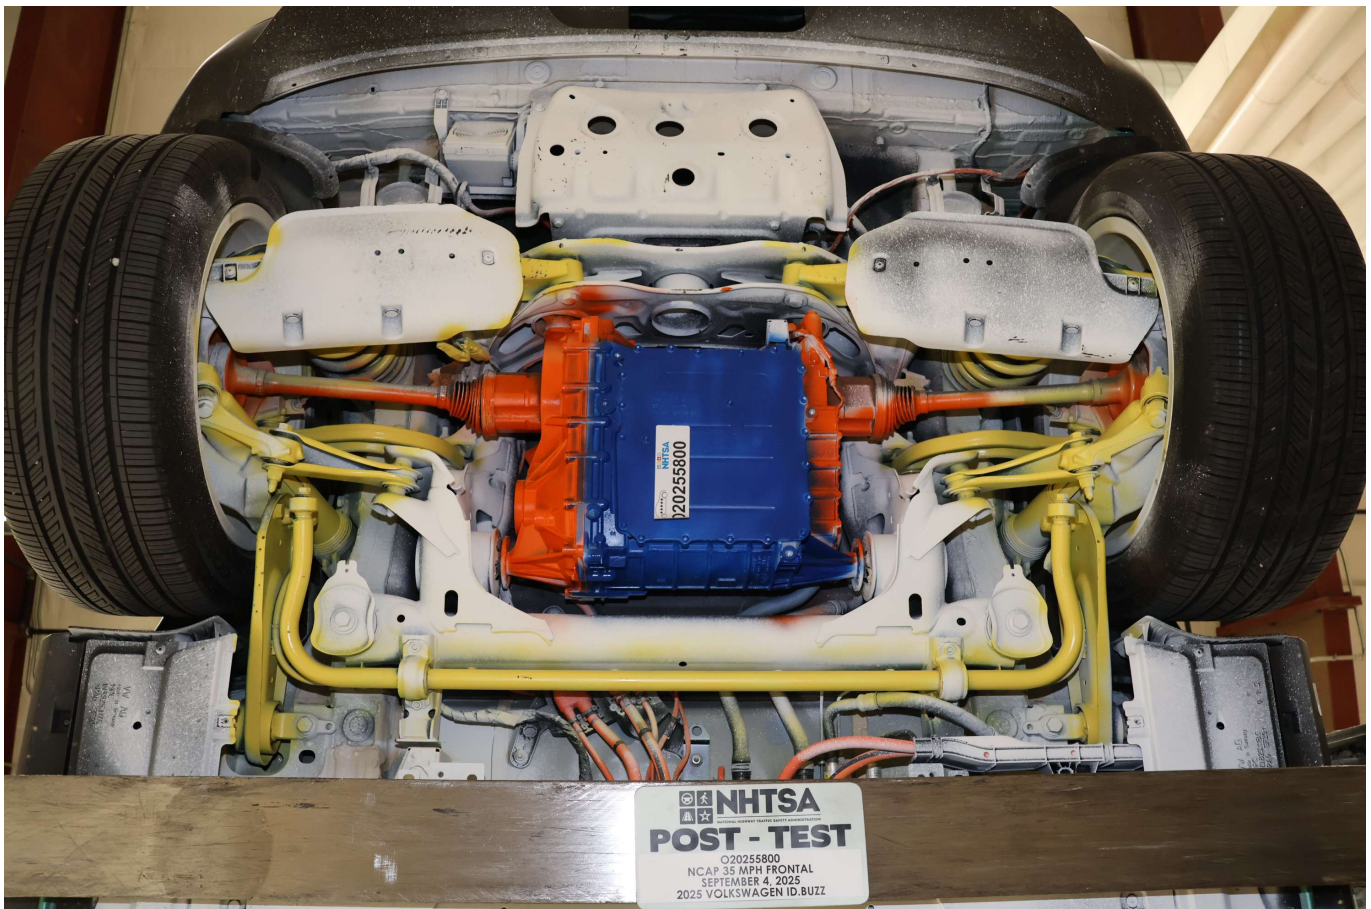


Photo No. 305-17 - Post-Impact View of Electric Propulsion Drive



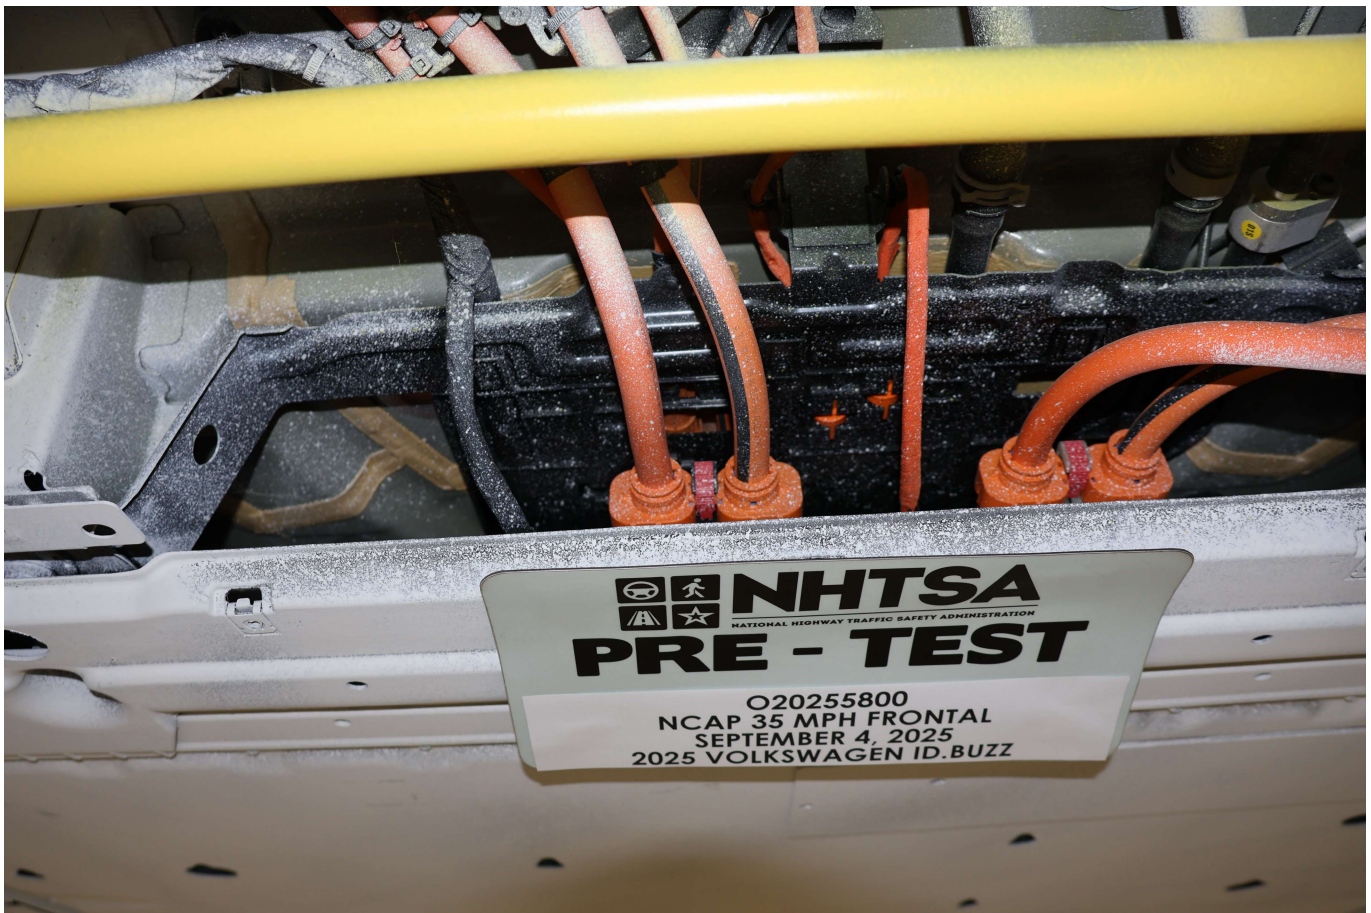


Photo No. 305-18 - Pre-Impact View of High Voltage Interconnect(s)

**PHOTOGRAPH NOT APPLICABLE**

Photo No. 305-19 - Pre-Impact View Propulsion Battery Venting System(s)



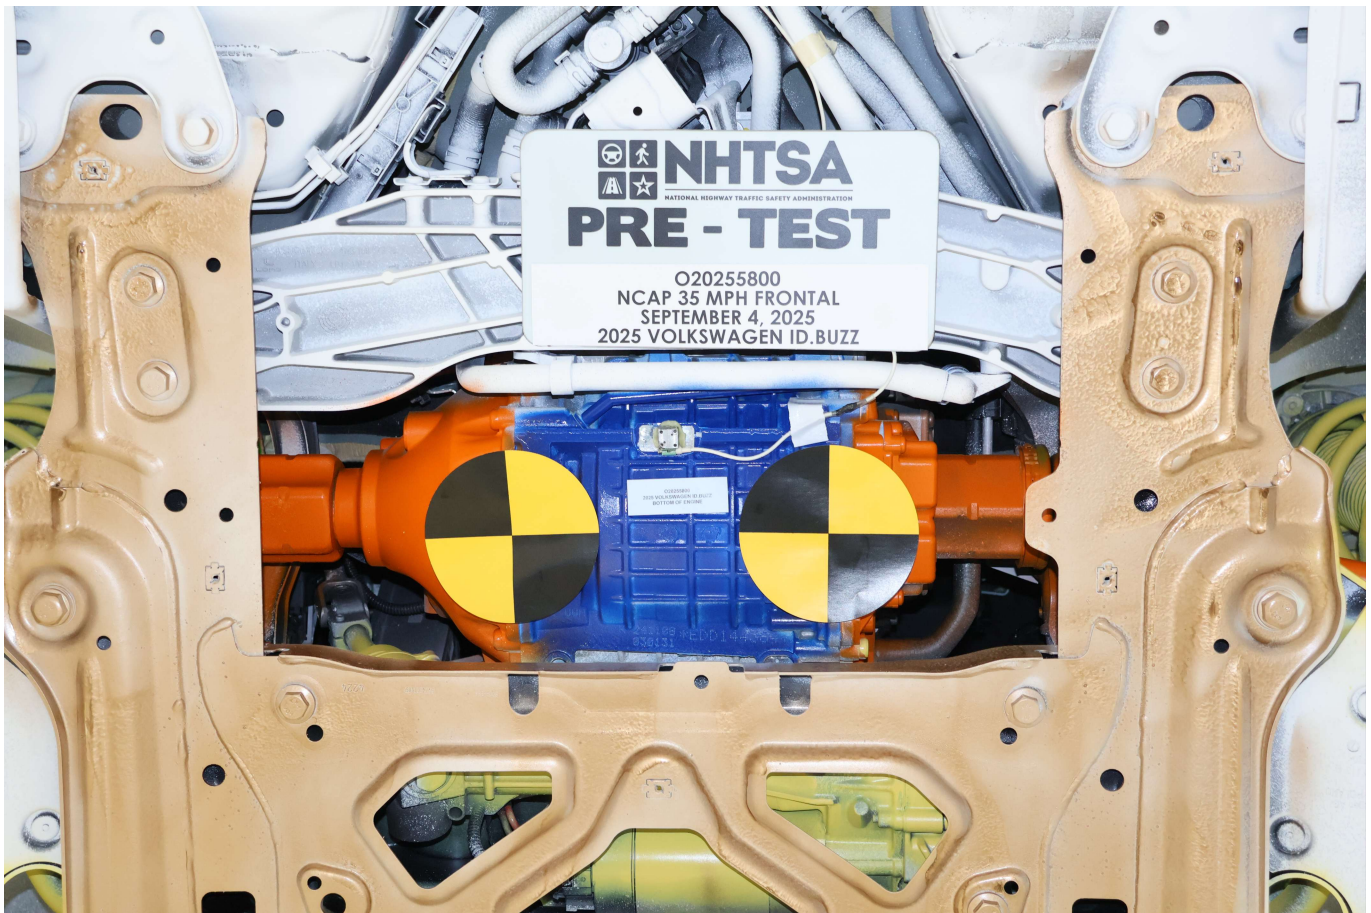


Photo No. 305-20 - Pre-Impact View of Other Visible Electric Propulsion Components



Photo No. 305-21 - Pre-Impact View of Ground Lead Attached





Photo No. 305-22 - Pre-Impact View of High Voltage Leads Attached



Photo No. 305-23 - Pre-Impact Close-Up View of High Voltage Leads Attached





Photo No. 305-24 - Pre-Impact View of Installed Test Interface Port



Photo No. 305-25 - Post-Impact View of Installed Test Interface Port



Photo No. 305-26 - Pre-Impact View of Other Test Devices

**PHOTOGRAPH NOT AVAILABLE**

Photo No. 305-27 - Post-Impact View of Other Test Devices





Photo No. 305-28 - FMVSS No. 305 Static Rollover at 90 Degrees



Photo No. 305-29 - FMVSS No. 305 Static Rollover at 180 Degrees



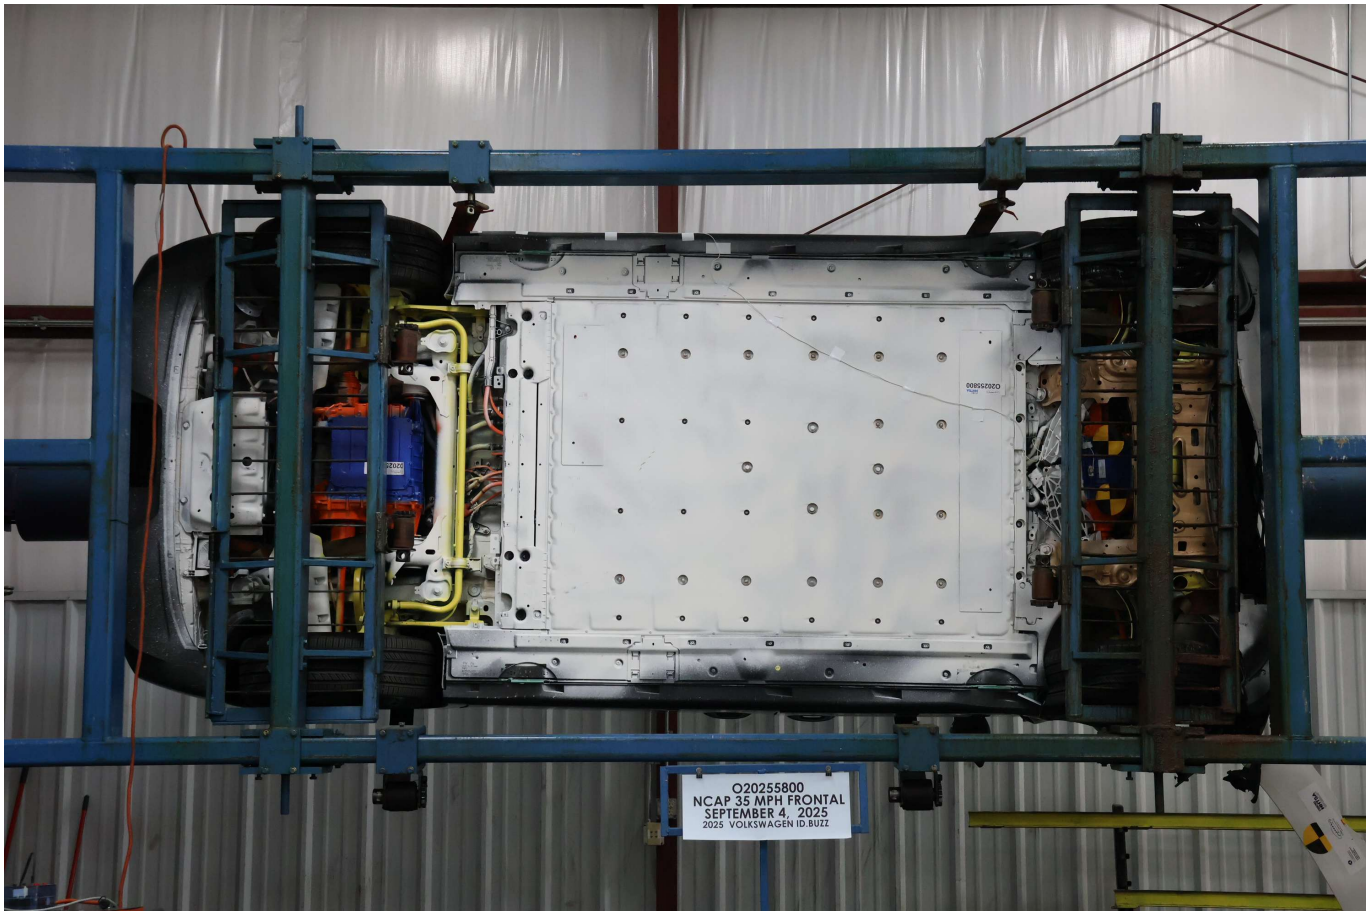


Photo No. 305-30 - FMVSS No. 305 Static Rollover at 270 Degrees



Photo No. 305-31 - FMVSS No. 305 Static Rollover at 360 Degrees



Photo No. 305-32 - Pre-Impact View of the Vehicle Passenger Compartment Adjacent to Propulsion Battery

**PHOTOGRAPH NOT AVAILABLE**

Photo No. 305-33 - Post-Impact View of the Vehicle Passenger Compartment Adjacent to Propulsion Battery

**PHOTOGRAPH NOT APPLICABLE**

Photo No. 305-34 - Post-Impact Propulsion Battery System Mounting and-or Intrusion Failure(s)

**PHOTOGRAPH NOT APPLICABLE**

Photo No. 305-35 - Post-Impact View of Battery Component Intrusion



**PHOTOGRAPH NOT APPLICABLE**

Photo No. 305-36 - Post-Impact View of Battery Module Movement or Retention Loss

**PHOTOGRAPH NOT APPLICABLE**

Photo No. 305-37 - Post-Impact View of Propulsion Battery Electrolyte Spillage Location

**PHOTOGRAPH NOT APPLICABLE**

Photo No. 305-38 - Post-Test View of Propulsion Battery Electrolyte Spillage Location

**APPENDIX B**  
**DUMMY RESPONSE DATA TRACES**



## TABLE OF DATA PLOTS

### Page No.

#### **List of Data Plots Provided in the Test Report**

|                |                                                   |     |
|----------------|---------------------------------------------------|-----|
| Figure No. 1.  | Driver Head X Acceleration vs. Time               | B-1 |
| Figure No. 2.  | Driver Head Y Acceleration vs. Time               | B-1 |
| Figure No. 3.  | Driver Head Z Acceleration vs. Time               | B-1 |
| Figure No. 4.  | Driver Head Resultant Acceleration vs. Time       | B-1 |
| Figure No. 5.  | Driver Chest Displacement vs. Time                | B-2 |
| Figure No. 6.  | Driver Chest X Acceleration vs. Time              | B-3 |
| Figure No. 7.  | Driver Chest Y Acceleration vs. Time              | B-3 |
| Figure No. 8.  | Driver Chest Z Acceleration vs. Time              | B-3 |
| Figure No. 9.  | Driver Chest Resultant Acceleration vs. Time      | B-3 |
| Figure No. 10. | Driver Neck Force X vs. Time                      | B-4 |
| Figure No. 11. | Driver Neck Force Z vs. Time                      | B-4 |
| Figure No. 12. | Driver Neck Moment Y vs. Time                     | B-4 |
| Figure No. 13. | Driver Nij (NTF) vs. Time                         | B-5 |
| Figure No. 14. | Driver Nij (NTE) vs. Time                         | B-5 |
| Figure No. 15. | Driver Nij (NCF) vs. Time                         | B-5 |
| Figure No. 16. | Driver Nij (NCE) vs. Time                         | B-5 |
| Figure No. 17. | Driver Left Femur Force vs. Time                  | B-6 |
| Figure No. 18. | Driver Right Femur Force vs. Time                 | B-6 |
| Figure No. 19. | Passenger Head X Acceleration vs. Time            | B-7 |
| Figure No. 20. | Passenger Head Y Acceleration vs. Time            | B-7 |
| Figure No. 21. | Passenger Head Z Acceleration vs. Time            | B-7 |
| Figure No. 22. | Passenger Head Resultant Acceleration vs. Time    | B-7 |
| Figure No. 23. | Passenger Chest Displacement vs. Time             | B-8 |
| Figure No. 24. | Passenger Chest X Acceleration vs. Time           | B-9 |
| Figure No. 25. | Passenger Chest Y Acceleration vs. Time           | B-9 |
| Figure No. 26. | Passenger Chest Z Acceleration vs. Time           | B-9 |
| Figure No. 27. | Passenger Chest Resultant Z Acceleration vs. Time | B-9 |

|                                                     | <u>Page No.</u> |
|-----------------------------------------------------|-----------------|
| Figure No. 28. Passenger Neck Force X vs. Time      | B-10            |
| Figure No. 29. Passenger Neck Force Z vs. Time      | B-10            |
| Figure No. 30. Passenger Neck Moment Y vs. Time     | B-10            |
| Figure No. 31. Passenger Nij (NTF) vs. Time         | B-11            |
| Figure No. 32. Passenger Nij (NTE) vs. Time         | B-11            |
| Figure No. 33. Passenger Nij (NCF) vs. Time         | B-11            |
| Figure No. 34. Passenger Nij (NCE) vs. Time         | B-11            |
| Figure No. 35. Passenger Left Femur Force vs. Time  | B-12            |
| Figure No. 36. Passenger Right Femur Force vs. Time | B-12            |

**The following additional dummy and vehicle response data can be found in the R&D section of the NHTSA website at [www.nhtsa.gov](http://www.nhtsa.gov)**


Driver Head X Redundant  
 Driver Head Y Redundant  
 Driver Head Z Redundant  
 Driver Head Angular Velocity X  
 Driver Head Angular Velocity Y  
 Driver Head Angular Velocity Z  
 Driver Upper Neck Force Y  
 Driver Upper Neck Moment X  
 Driver Upper Neck Moment Z  
 Driver Chest X Redundant  
 Driver Chest Y Redundant  
 Driver Chest Z Redundant  
 Driver Pelvis X  
 Driver Pelvis Y  
 Driver Pelvis Z  
 Driver Left Femur Redundant  
 Driver Right Femur Redundant  
 Driver Left Upper Tibia Moment X  
 Driver Left Upper Tibia Moment Y

Driver Left Upper Tibia Force Z  
Driver Left Lower Tibia Moment X  
Driver Left Lower Tibia Moment Y  
Driver Left Lower Tibia Force Z  
Driver Right Upper Tibia Moment X  
Driver Right Upper Tibia Moment Y  
Driver Right Upper Tibia Force Z  
Driver Right Lower Tibia Moment X  
Driver Right Lower Tibia Moment Y  
Driver Right Lower Tibia Force Z  
Driver Left Foot Fore Z  
Driver Left Foot Aft X  
Driver Left Foot Aft Z  
Driver Right Foot Fore Z  
Driver Right Foot Aft X  
Driver Right Foot Aft Z  
Driver Lap Belt Force  
Driver Shoulder Belt Force  
Passenger Head X Redundant  
Passenger Head Y Redundant  
Passenger Head Z Redundant  
Passenger Head Angular Velocity X  
Passenger Head Angular Velocity Y  
Passenger Head Angular Velocity Z  
Passenger Upper Neck Force Y  
Passenger Upper Neck Moment X  
Passenger Upper Neck Moment Z  
Passenger Chest X Redundant  
Passenger Chest Y Redundant  
Passenger Chest Z Redundant  
Passenger Pelvis X  
Passenger Pelvis Y




Passenger Pelvis Z  
Passenger Left Femur Redundant  
Passenger Right Femur Redundant  
Passenger Left Upper Tibia Moment X  
Passenger Left Upper Tibia Moment Y  
Passenger Left Upper Tibia Force Z  
Passenger Left Lower Tibia Moment X  
Passenger Left Lower Tibia Moment Y  
Passenger Left Lower Tibia Force Z  
Passenger Right Upper Tibia Moment X  
Passenger Right Upper Tibia Moment Y  
Passenger Right Upper Tibia Force Z  
Passenger Right Lower Tibia Moment X  
Passenger Right Lower Tibia Moment Y  
Passenger Right Lower Tibia Force Z  
Passenger Left Foot Fore Z  
Passenger Left Foot Aft X  
Passenger Left Foot Aft Z  
Passenger Right Foot Fore Z  
Passenger Right Foot Aft X  
Passenger Right Foot Aft Z  
Passenger Lap Belt Force  
Passenger Shoulder Belt Force  
Left Rear Seat Crossmember X  
Right Rear Seat Crossmember X  
Vehicle Engine Top X  
Vehicle Engine Bottom X  
Left Rear Seat Crossmember Z  
Right Rear Seat Crossmember Z  
Left Rear Seat Crossmember Xr  
Right Rear Seat Crossmember Xr  
Advanced Research Load Cell Barrier – 528 channels


**DRIVER HEAD X (g) vs Time (ms)**

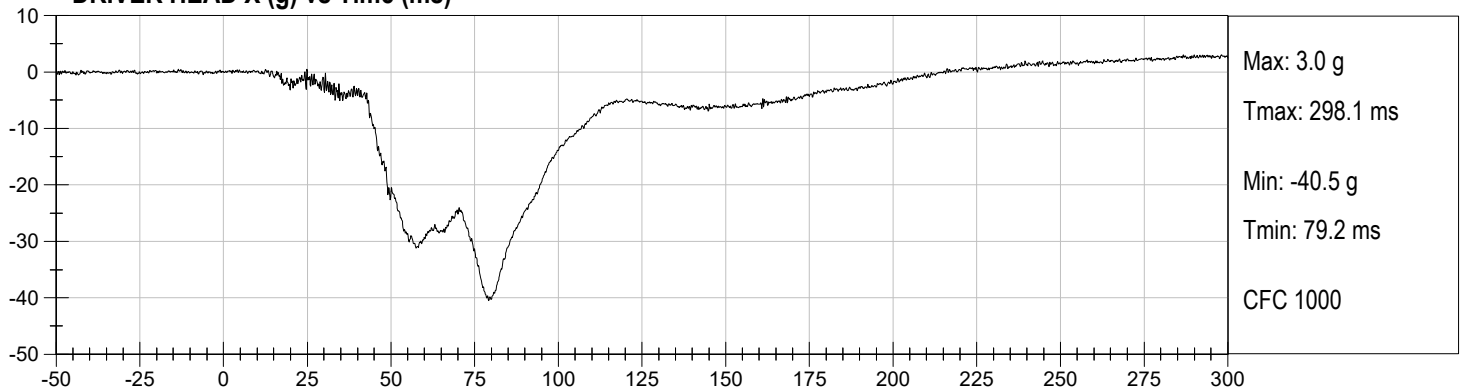


**DRIVER HEAD Y (g) vs Time (ms)**

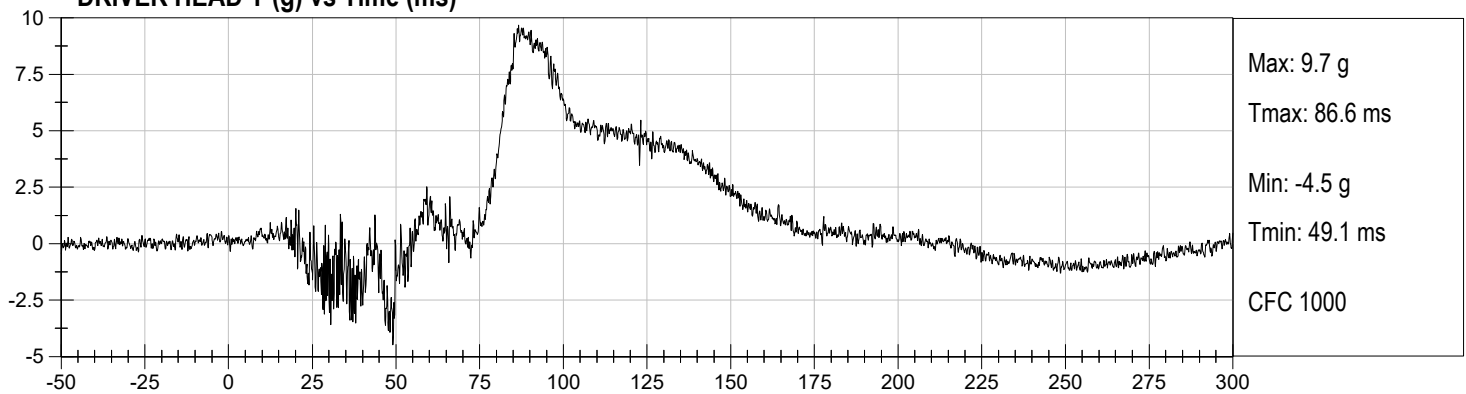


**DRIVER HEAD Z (g) vs Time (ms)**

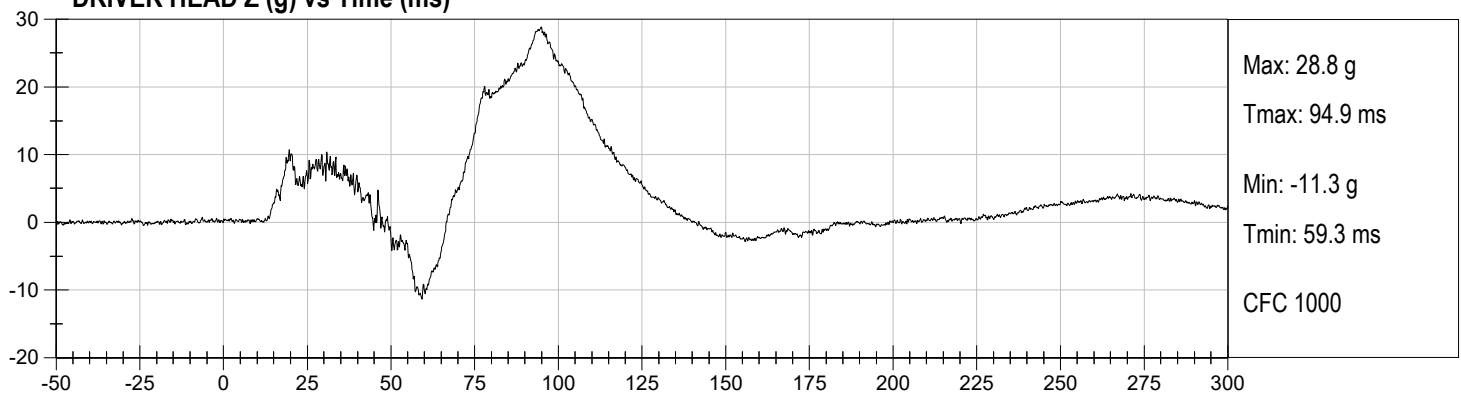


**DRIVER HEAD Resultant (g) vs Time (ms)**

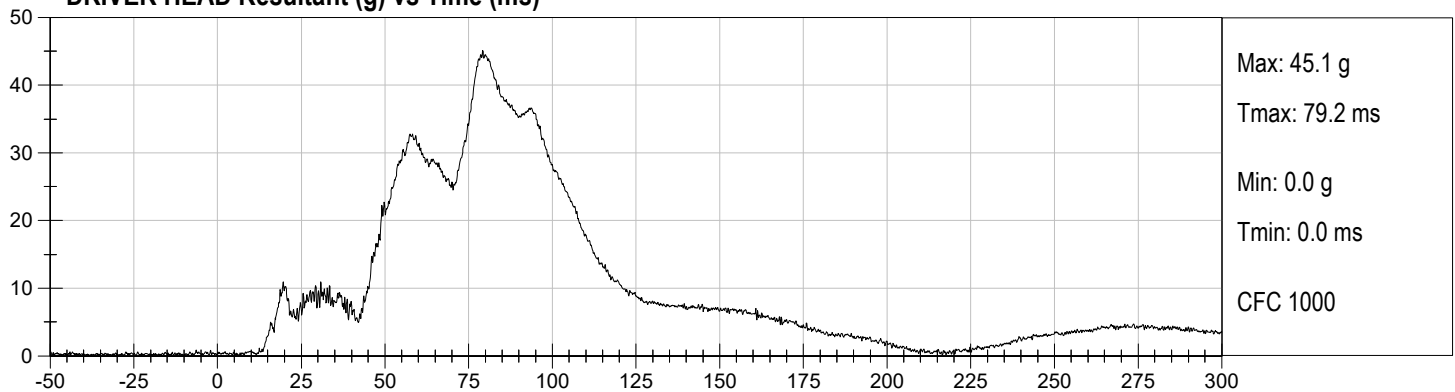

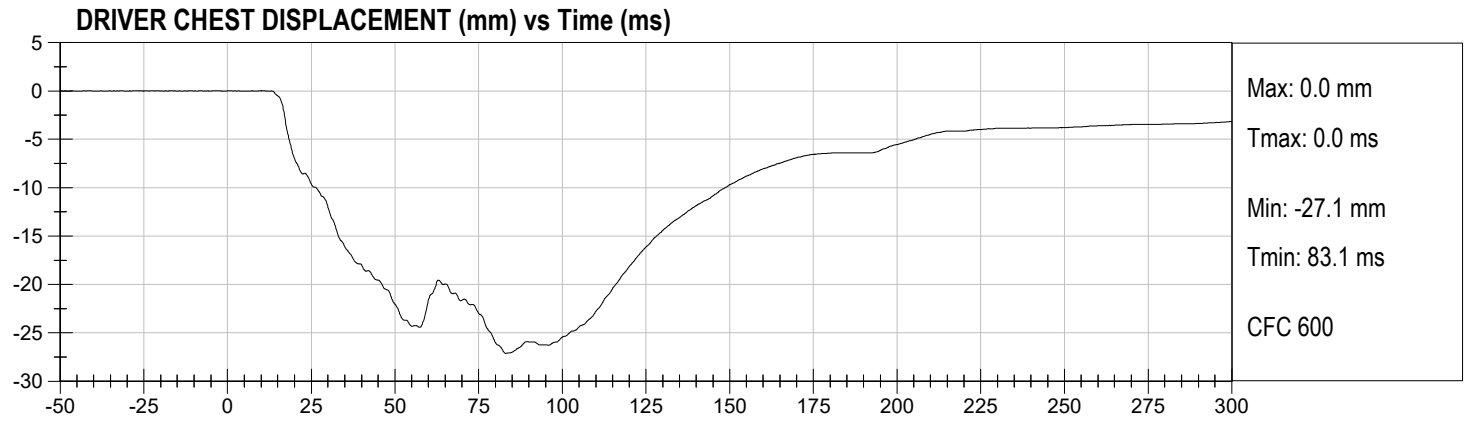





**DRIVER CHEST X (g) vs Time (ms)**

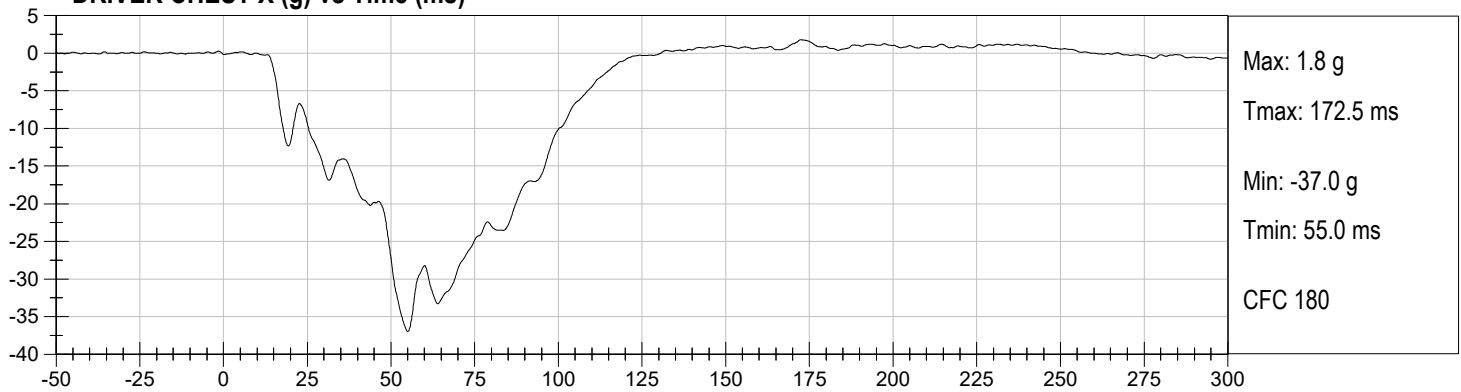


**DRIVER CHEST Y (g) vs Time (ms)**



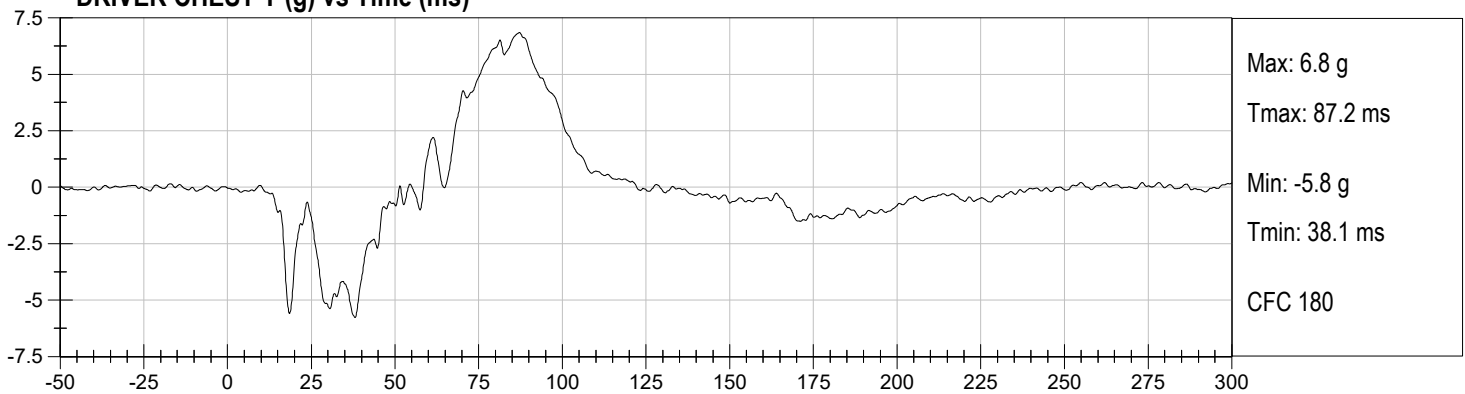


**DRIVER CHEST Z (g) vs Time (ms)**

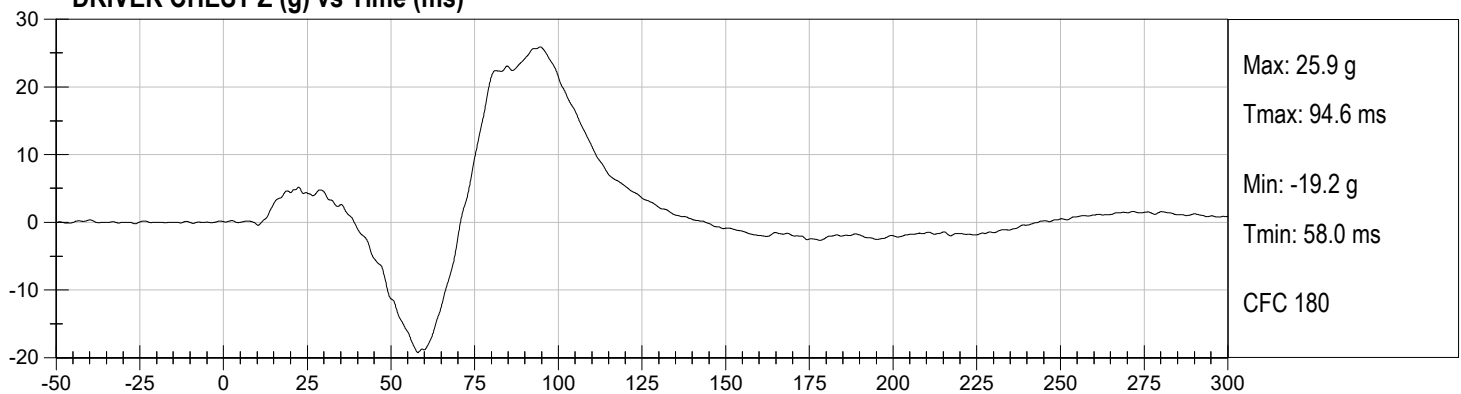


**DRIVER CHEST Resultant (g) vs Time (ms)**

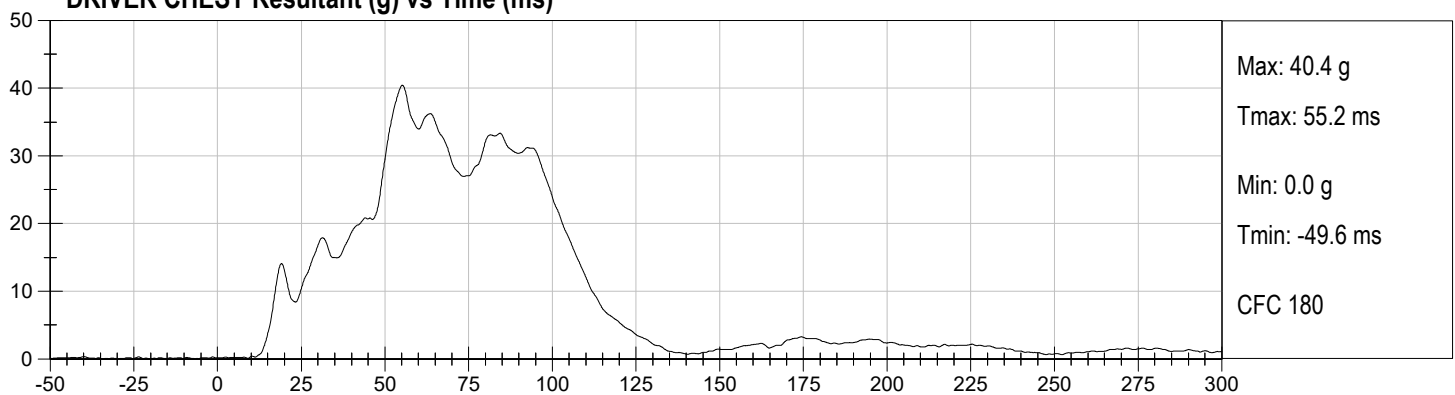


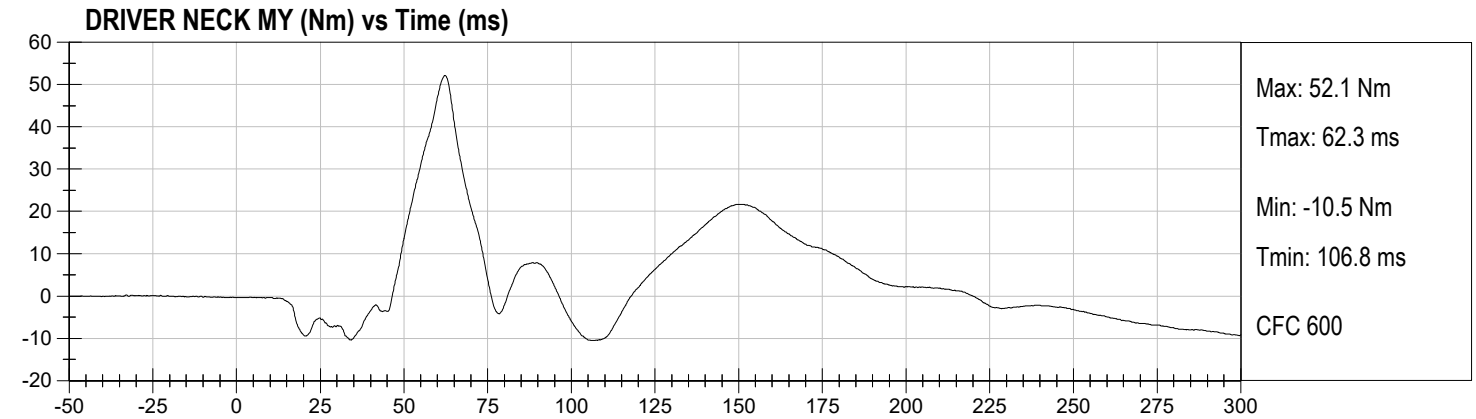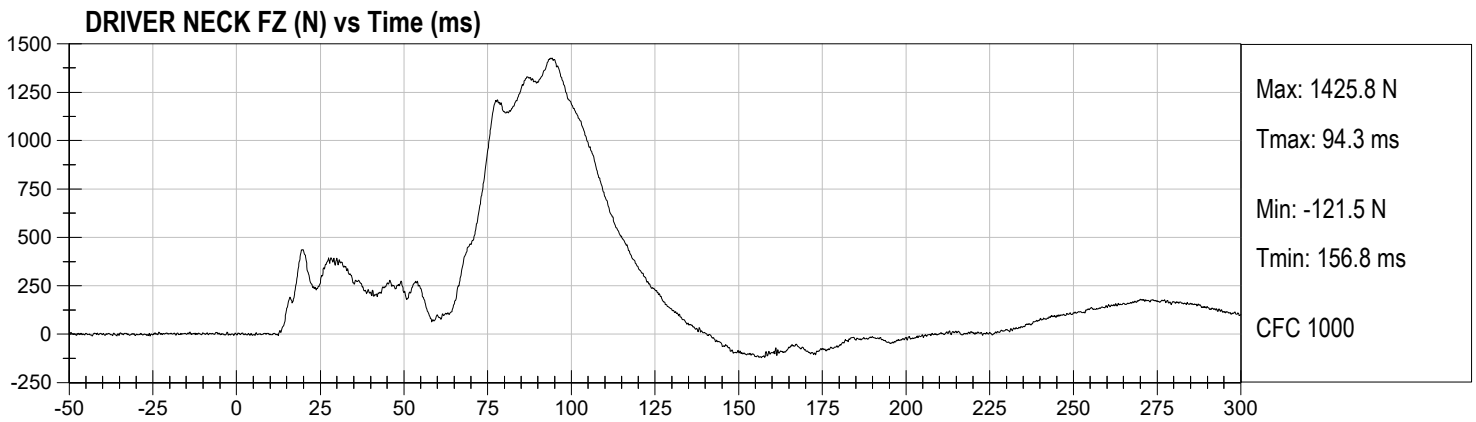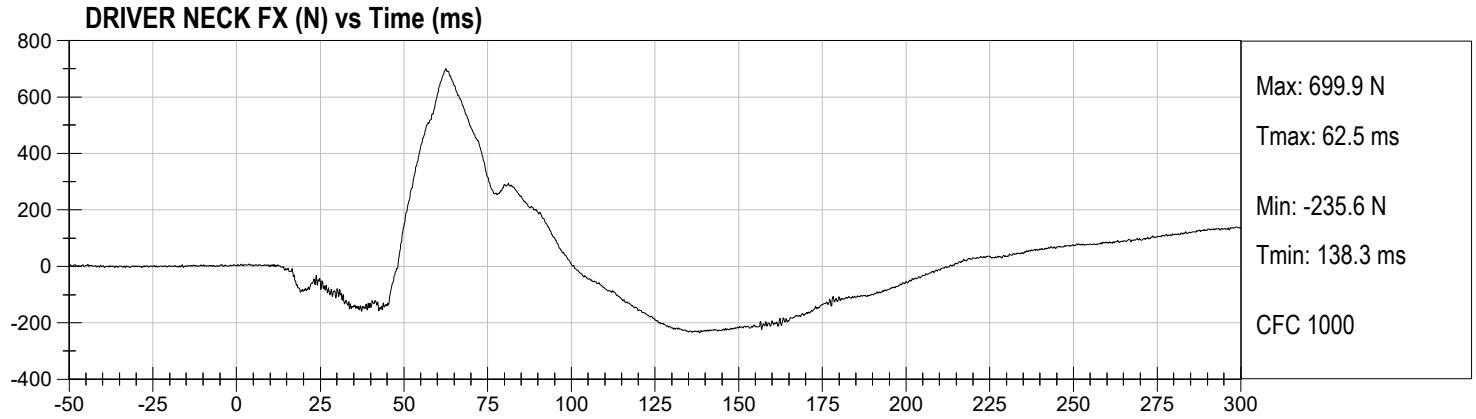


DRIVER Nij (NTF) () vs Time (ms)

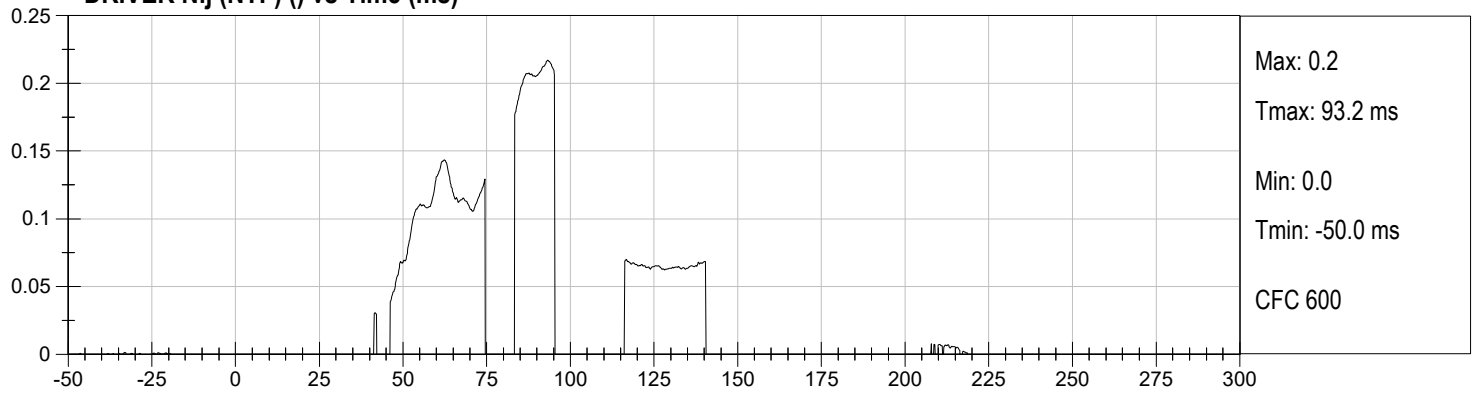


DRIVER Nij (NTE) () vs Time (ms)

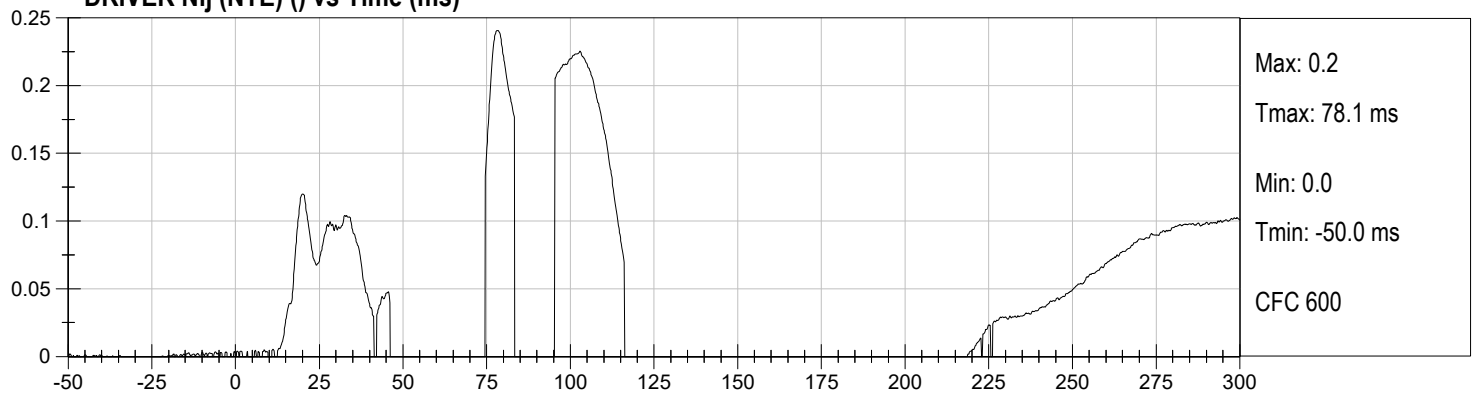

DRIVER Nij (NCF) () vs Time (ms)

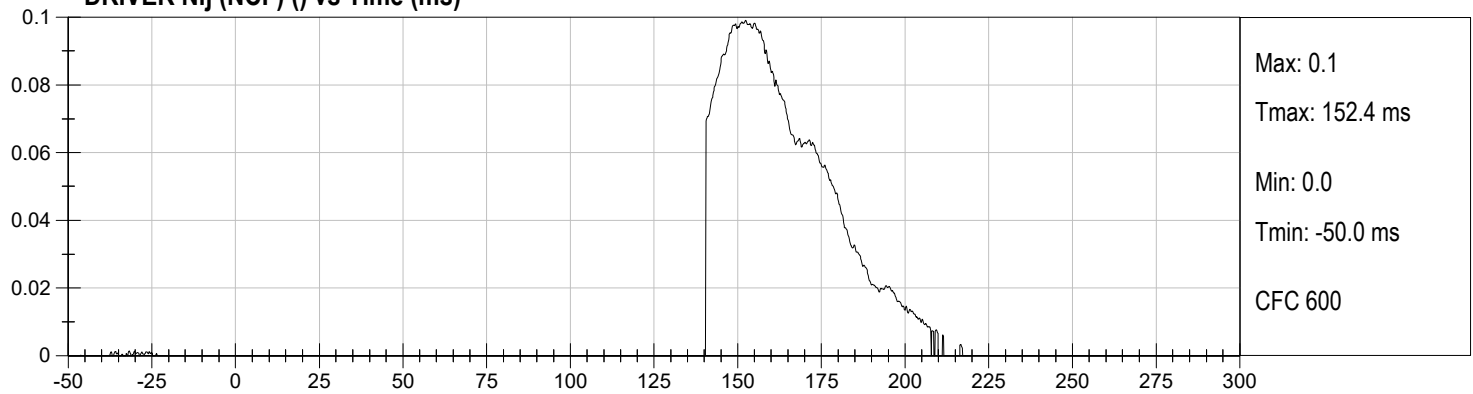


DRIVER Nij (NCE) () vs Time (ms)

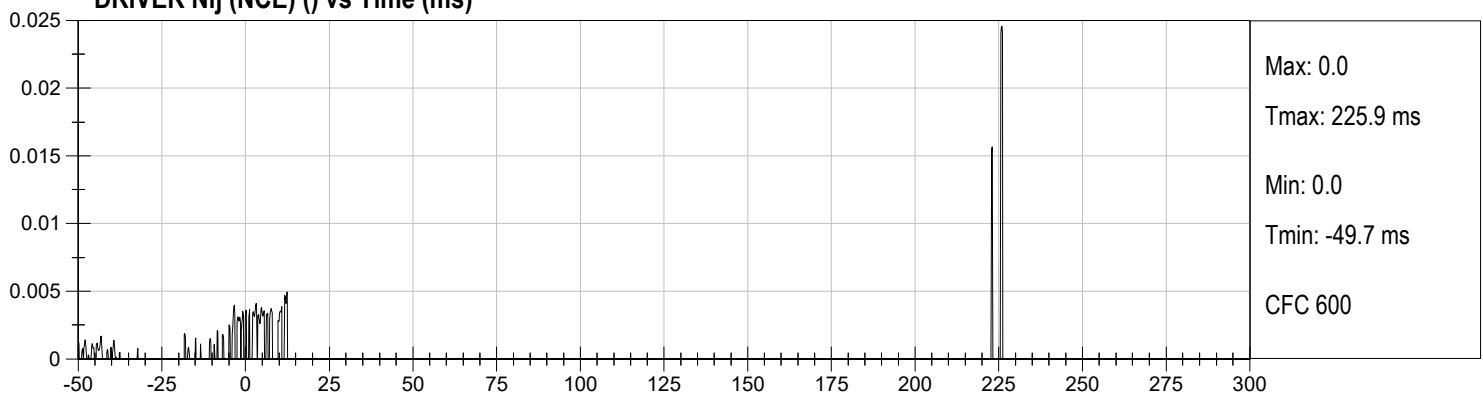





DRIVER LEFT FEMUR (N) vs Time (ms)

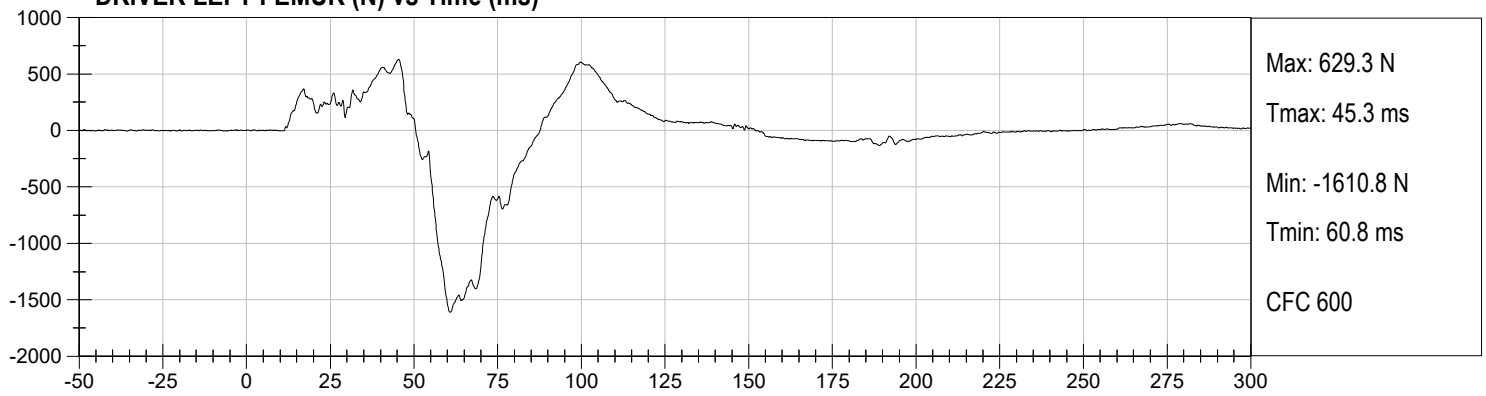


DRIVER RIGHT FEMUR (N) vs Time (ms)

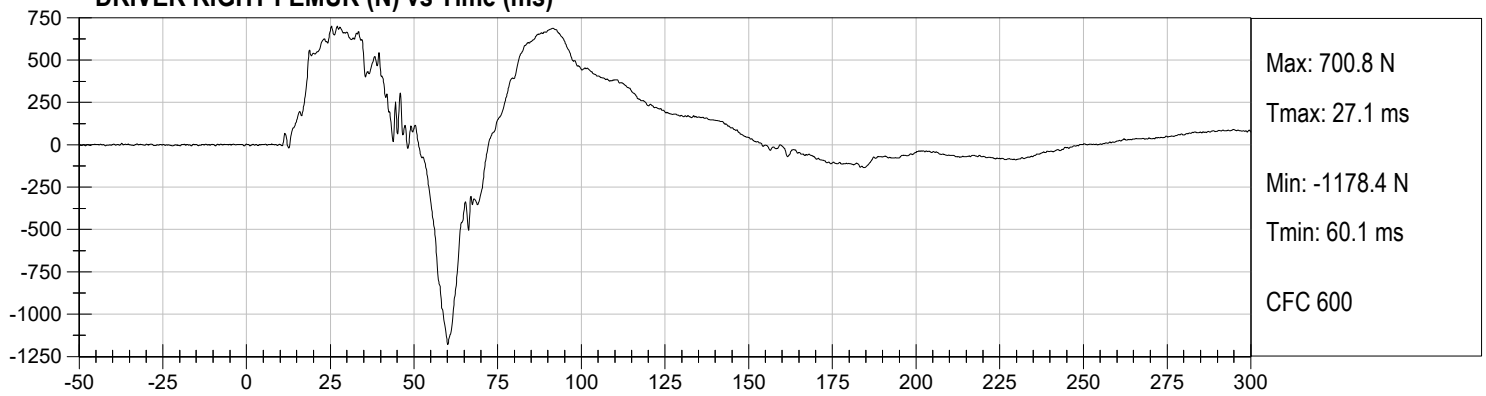


**PASSENGER HEAD X (g) vs Time (ms)**

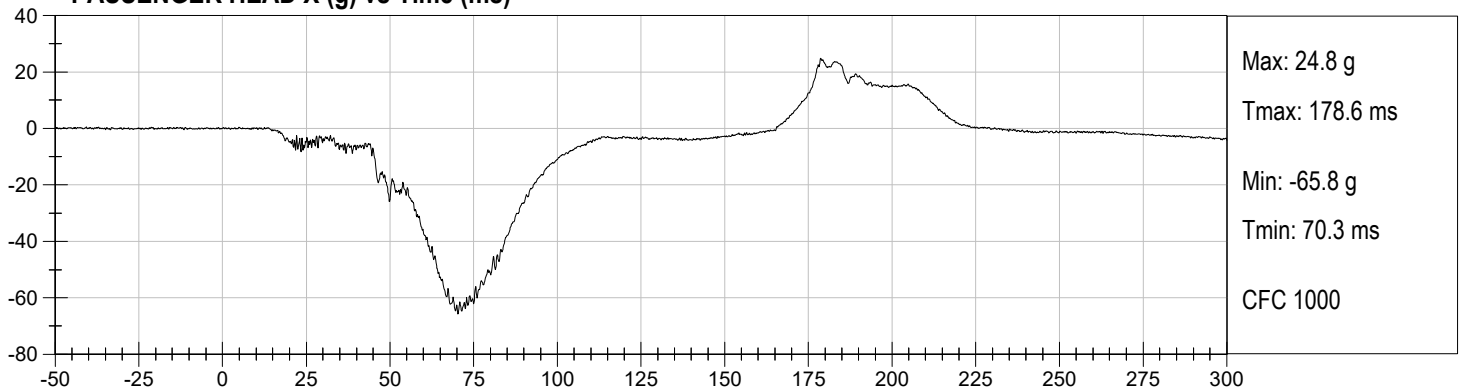


**PASSENGER HEAD Y (g) vs Time (ms)**

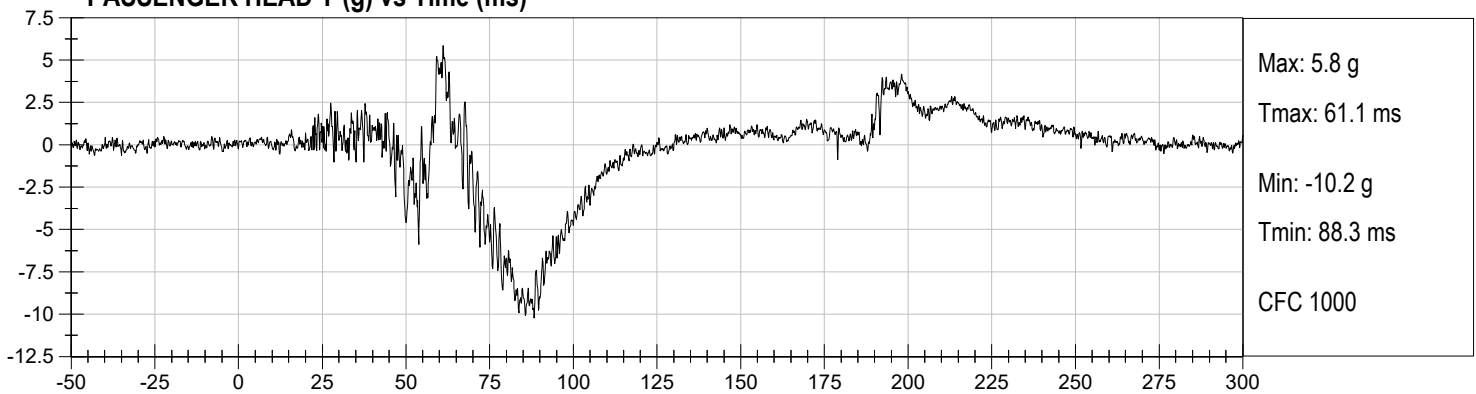


**PASSENGER HEAD Z (g) vs Time (ms)**

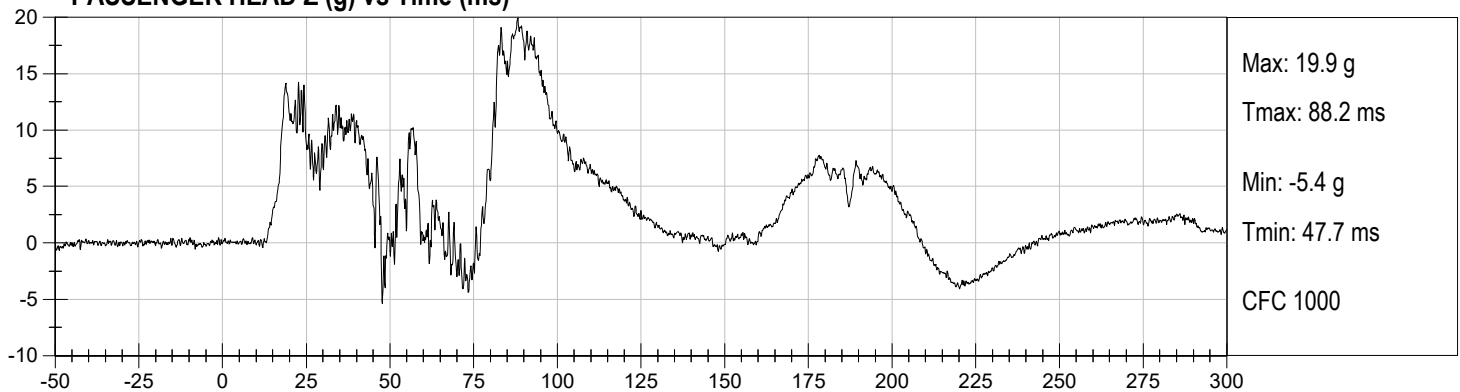


**PASSENGER HEAD Resultant (g) vs Time (ms)**

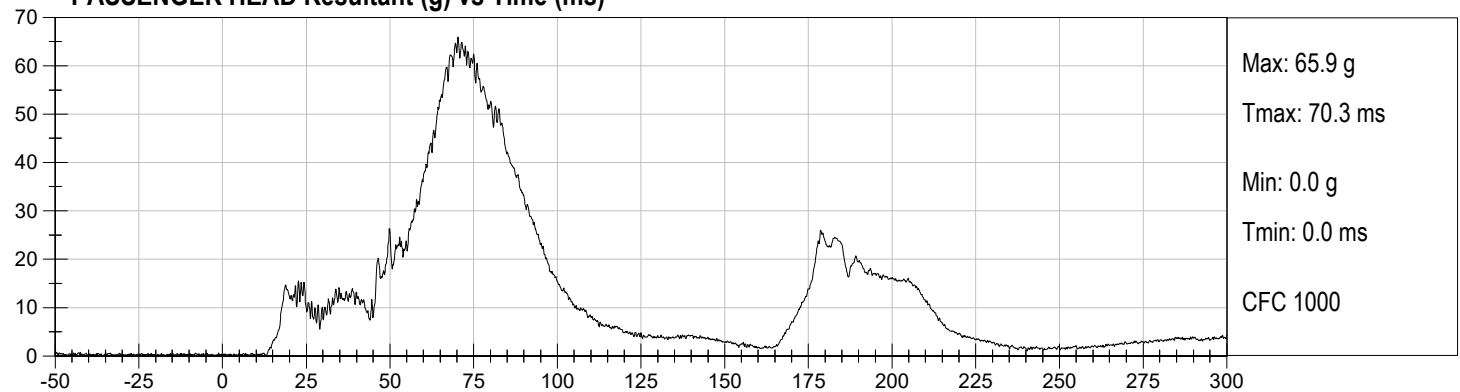

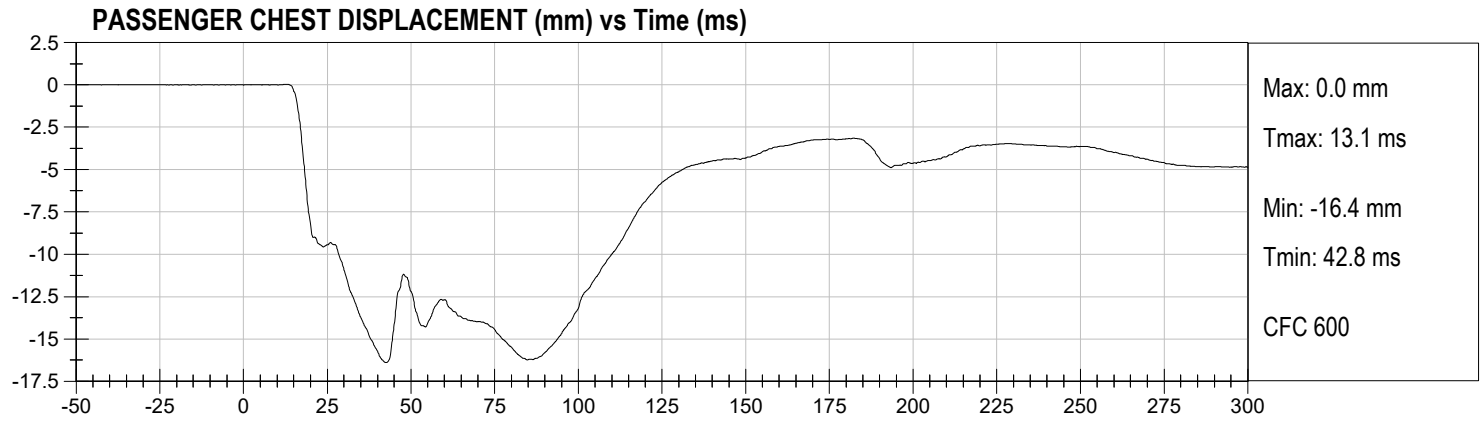





**PASSENGER CHEST X (g) vs Time (ms)**

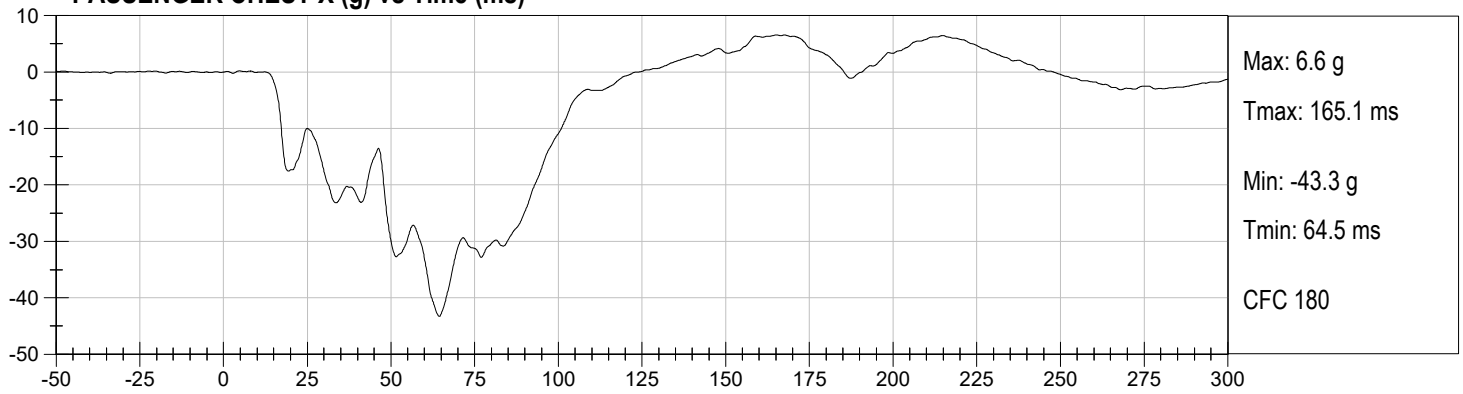


**PASSENGER CHEST Y (g) vs Time (ms)**

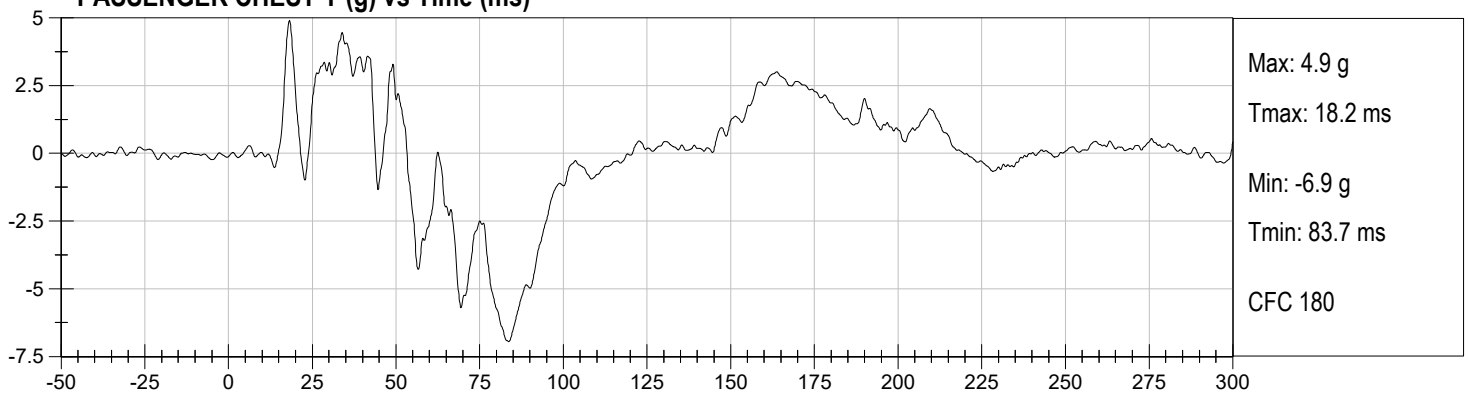


**PASSENGER CHEST Z (g) vs Time (ms)**

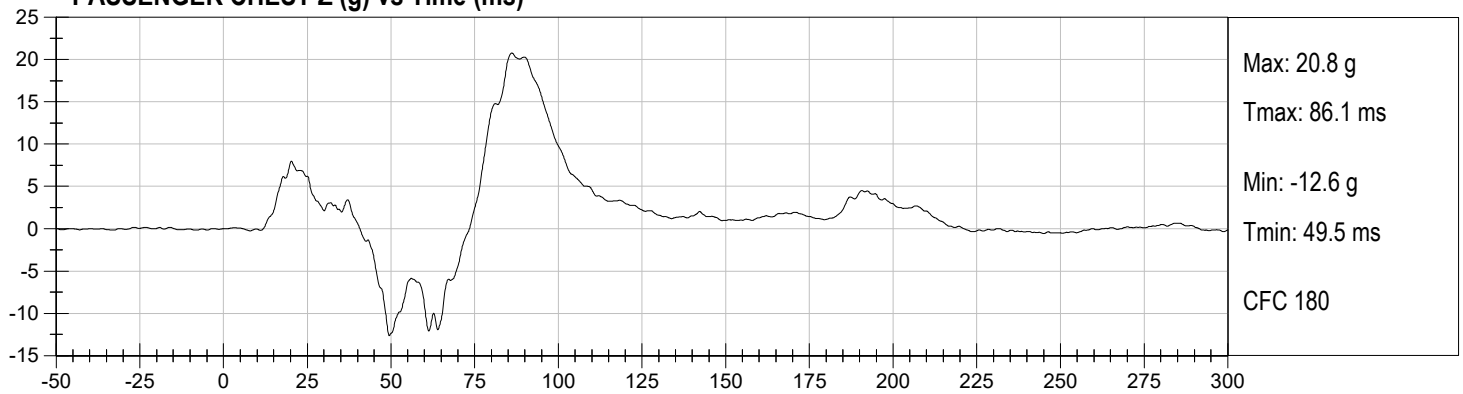


**PASSENGER CHEST Resultant (g) vs Time (ms)**

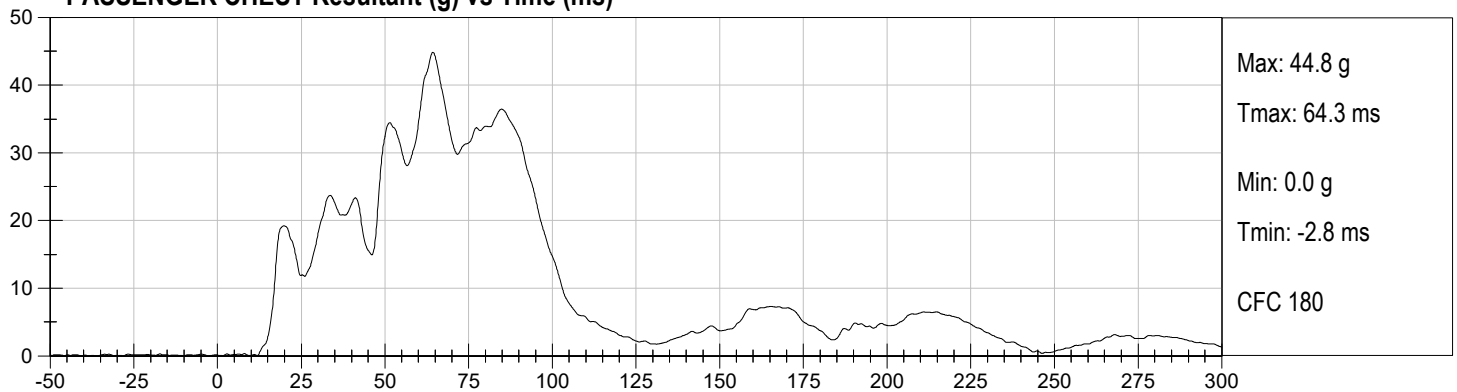


**PASSENGER NECK FX (N) vs Time (ms)**




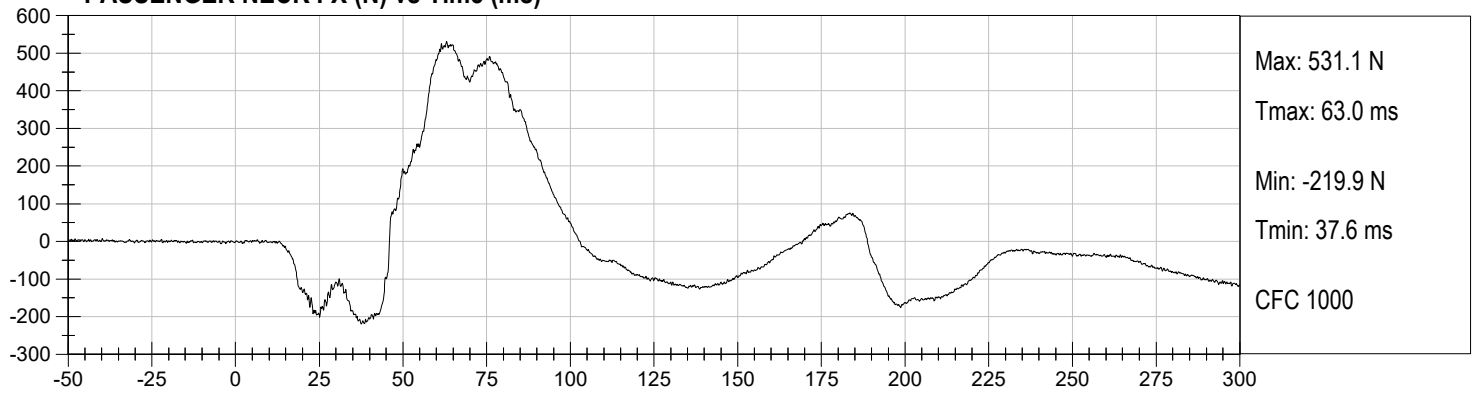


**PASSENGER NECK FZ (N) vs Time (ms)**

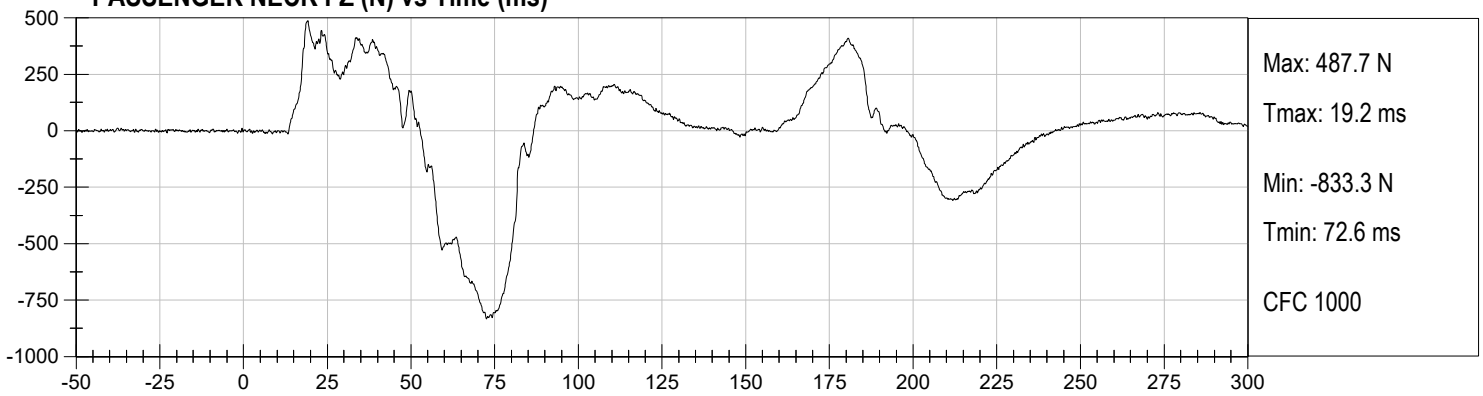


**PASSENGER NECK MY (Nm) vs Time (ms)**

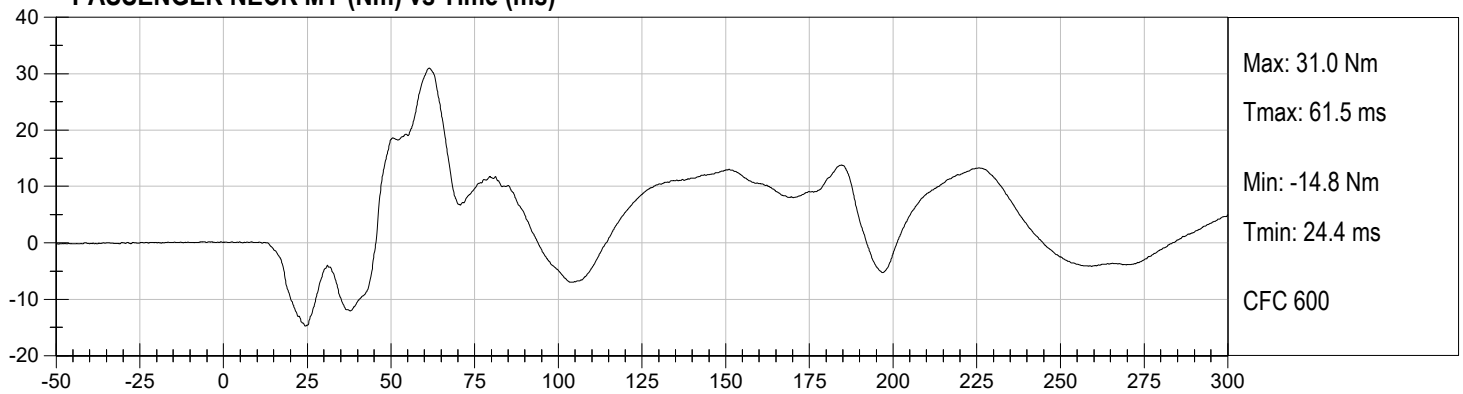

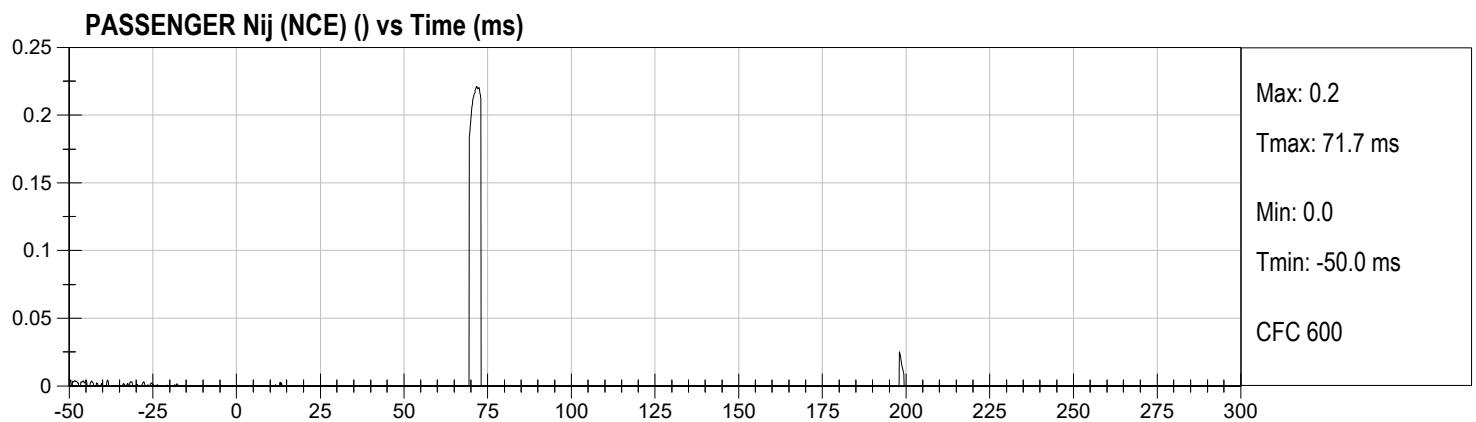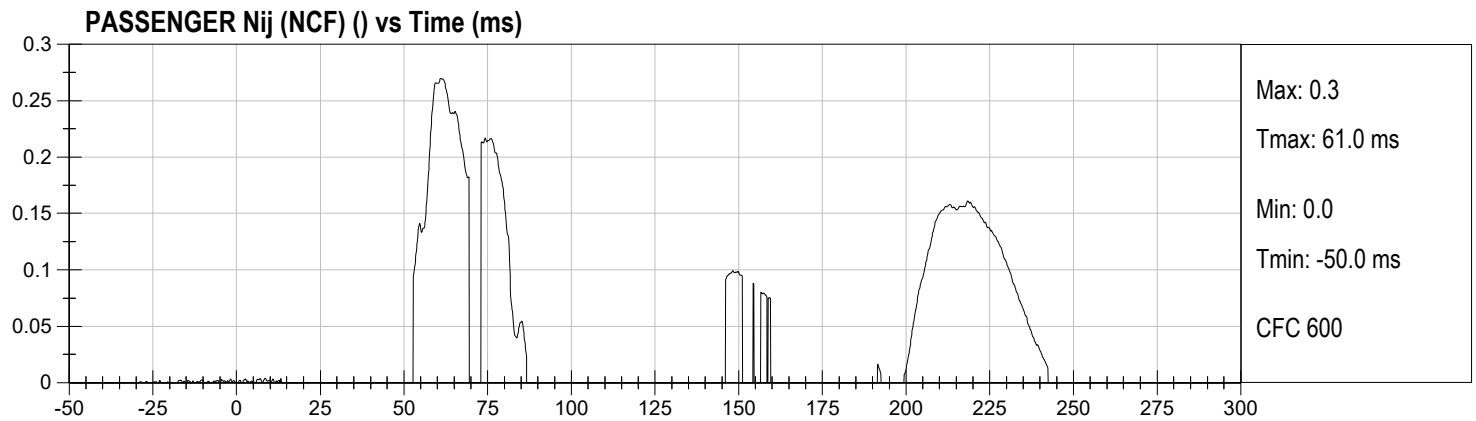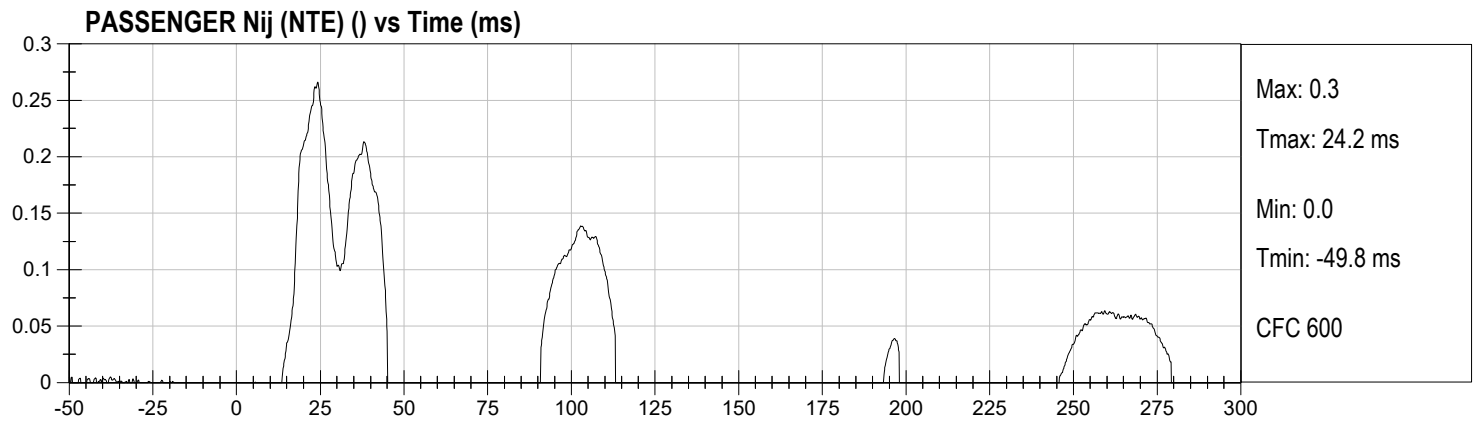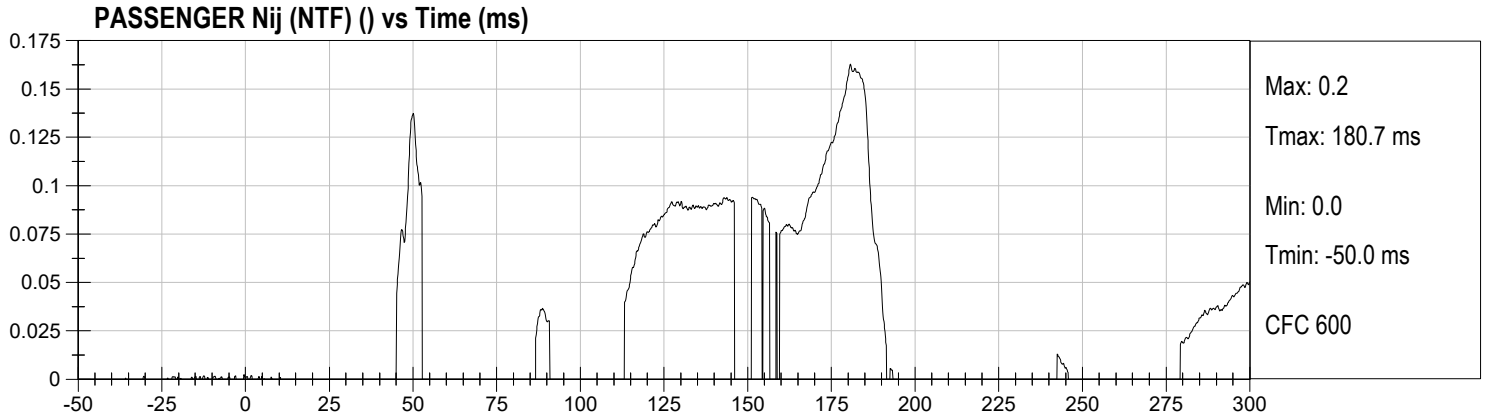




**PASSENGER LEFT FEMUR (N) vs Time (ms)**

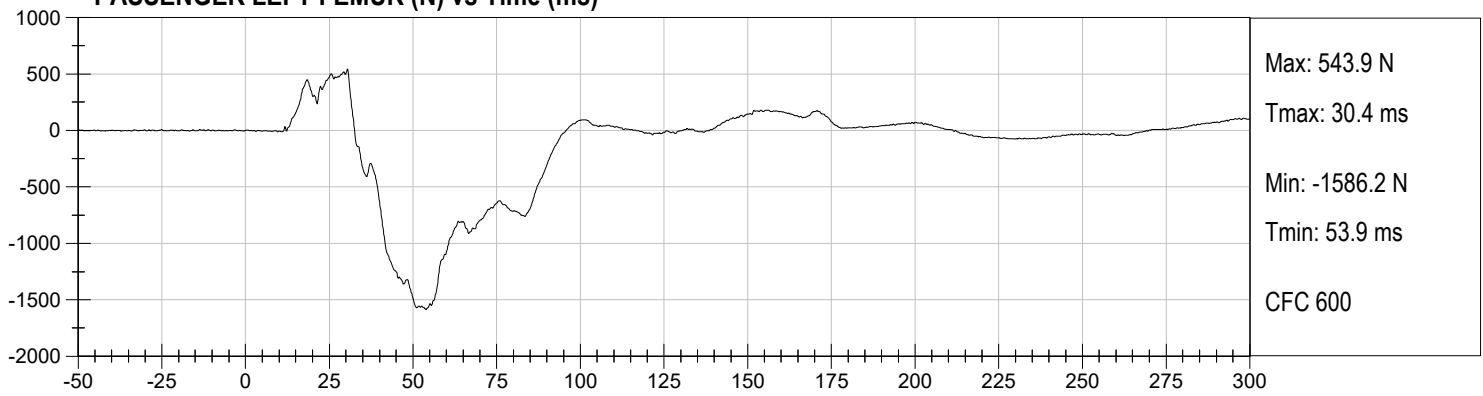

**PASSENGER RIGHT FEMUR (N) vs Time (ms)**

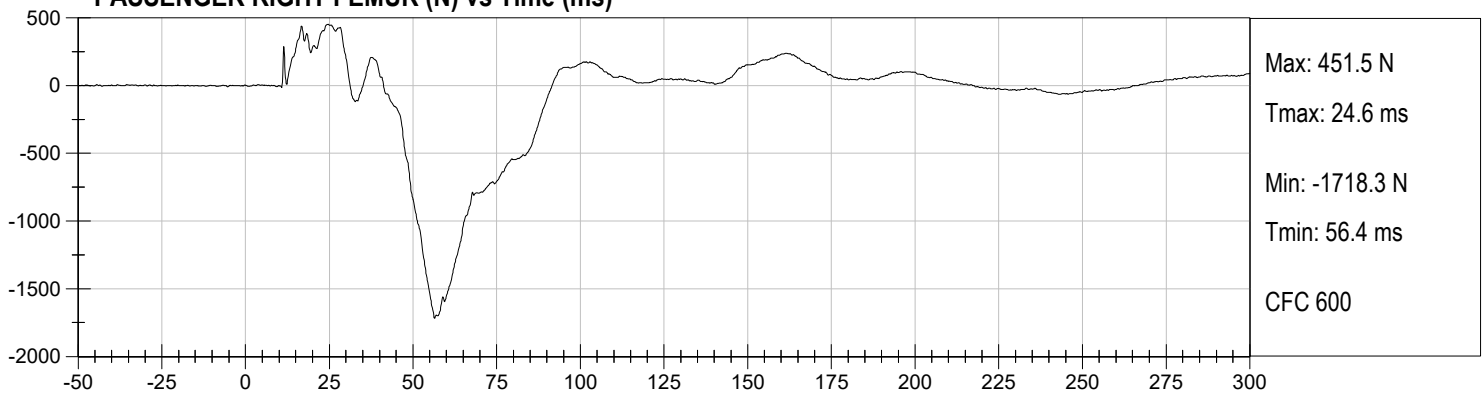

**APPENDIX C**  
**DUMMY QUALIFICATION AND PERFORMANCE VERIFICATION**

## **QUALIFICATION TEST RESULTS**

### **PRE-TEST**

**HYBRID III 50<sup>TH</sup> PERCENTILE MALE - DRIVER ATD**



**Hybrid III 50th, External Measurements  
SN: 064**

| HYBRID III, PART 572, SUBPART E EXTERNAL DIMENSIONS |                                   |                                                                                                                                              |                                   |                       |
|-----------------------------------------------------|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|-----------------------|
| DIMENSION                                           | DESCRIPTION                       | DETAILS                                                                                                                                      | ASSEMBLY<br>DIMENSION<br>(inches) | ACTUAL<br>MEASUREMENT |
| A                                                   | TOTAL SITTING HEIGHT              | Seat surface to highest point on top of the head.                                                                                            | 34.6–35.0                         | 34.71                 |
| B                                                   | SHOULDER PIVOT HEIGHT             | Centerline of shoulder pivot bolt to the seat surface.                                                                                       | 19.9-20.5                         | 20.31                 |
| C                                                   | H-POINT HEIGHT                    | Reference                                                                                                                                    | 3.3-3.5                           | 3.38                  |
| D                                                   | H-POINT LOCATION FROM<br>BACKLINE | Reference                                                                                                                                    | 5.3-5.5                           | 5.40                  |
| E                                                   | SHOULDER PIVOT FROM<br>BACKLINE   | Center of the shoulder clevis to the rear vertical surface of the fixture.                                                                   | 3.3-3.7                           | 3.46                  |
| F                                                   | THIGH CLEARANCE                   | Measured at the highest point on the upper femur segment.                                                                                    | 5.5-6.1                           | 6.09                  |
| G                                                   | BACK OF ELBOW TO<br>WRIST PIVOT   | back of the elbow flesh to the wrist pivot in line with the elbow and wrist pivots                                                           | 11.4-12.0                         | 11.48                 |
| H                                                   | HEAD BACK TO BACKLINE             | Back of Skull cap skin to seat rear vertical surface (Reference)                                                                             | 1.6-1.8                           | 1.75                  |
| I                                                   | SHOULDER TO- ELBOW<br>LENGTH      | Measure from the highest point on top of the shoulder clevis to the lowest part of the flesh on the elbow in line with the elbow pivot bolt. | 13.0-13.6                         | 13.08                 |
| J                                                   | ELBOW REST HEIGHT                 | Measure from the flesh below the elbow pivot bolt to the seat surface.                                                                       | 7.5-8.3                           | 8.13                  |
| K                                                   | BUTTOCK TO KNEE<br>LENGTH         | The forward most part of the knee flesh to the rear vertical surface of the fixture.                                                         | 22.8-23.8                         | 23.49                 |
| L                                                   | POPLITEAL HEIGHT                  | Seat surface to the plane of the horizontal plane of the bottom of the feet.                                                                 | 16.9-17.9                         | 17.01                 |
| M                                                   | KNEE PIVOT HEIGHT                 | Centerline of knee pivot bolt to the horizontal plane of the bottom of the feet.                                                             | 19.1-19.7                         | 19.22                 |
| N                                                   | BUTTOCK POPLITEAL<br>LENGTH       | The rearmost surface of the lower leg to the same point on the rear surface of the buttocks used for dim. "K".                               | 17.8-18.8                         | 18.20                 |

| HYBRID III, SUBPART E EXTERIOR DIMENSIONS, continued |                                                           |                                                   |           |                    |
|------------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|-----------|--------------------|
| DIMENSION                                            | DESCRIPTION                                               | DETAILS                                           |           | ACTUAL MEASUREMENT |
| O                                                    | CHEST DEPTH WITHOUT JACKET                                | Measured 16.9-17.1 in. above seat surface         | 8.4-9.0   | 8.43               |
| P                                                    | FOOT LENGTH                                               | Tip of toe to rear of heel                        | 9.9-10.5  | 10.33              |
| V                                                    | SHOULDER BREADTH                                          | Outside edges of right and left shoulder clevises | 16.3-17.2 | 16.65              |
| W                                                    | FOOT BREADTH                                              | The widest part of the foot                       | 3.6-4.2   | 3.94               |
| Y                                                    | CHEST CIRCUMFERENCE (WITH CHEST JACKET)                   | Measured 16.9-17.1 in. above seat surface         | 38.2-39.4 | 39.25              |
| Z                                                    | WAIST CIRCUMFERENCE                                       | Measured 8.9-9.1 in. above seat surface           | 32.9-34.1 | 33.89              |
| AA                                                   | REFERENCE LOCATION FOR MEASUREMENT OF CHEST CIRCUMFERENCE | Reference                                         | 16.9-17.1 | 17.00              |
| BB                                                   | REFERENCE LOCATION FOR MEASUREMENT OF WAIST CIRCUMFERENCE | Reference                                         | 8.9-9.1   | 9.00               |

**NOTE:** THE H-POINT IS LOCATED 1.83 INCHES FORWARD AND 2.57 INCHES DOWN FROM THE CENTER OF THE PELVIS ANGLE REFERENCE HOLE.







Head Drop Test  
Hybrid III 50th Percentile Male  
ATD Serial No: 064

Test Date: 08/05/2025  
Test ID: D252241  
Test Technician: Jonah Pulokas

| Tested Parameter             | Units | Specification      | Result | Pass/Fail |
|------------------------------|-------|--------------------|--------|-----------|
| Laboratory Temperature       | °C    | 18.9 to 25.6       | 21.2   | Pass      |
| Laboratory Relative Humidity | %     | 10 to 70           | 44     | Pass      |
| Peak Resultant Acceleration  | g     | 225 to 275         | 242    | Pass      |
| Peak Lateral Acceleration    | g     | -15.0 to 15.0      | -2.6   | Pass      |
| Unimodal                     | %     | within 10% of peak | 3      | Pass      |

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------|--------------|---------------|------------------|----------------------|
| HEAD X  | Endevco      | T30974        | 05/27/2025       | 11/26/2025           |
| HEAD Y  | Endevco      | T30975        | 05/27/2025       | 11/26/2025           |
| HEAD Z  | Endevco      | T30976        | 05/27/2025       | 11/26/2025           |




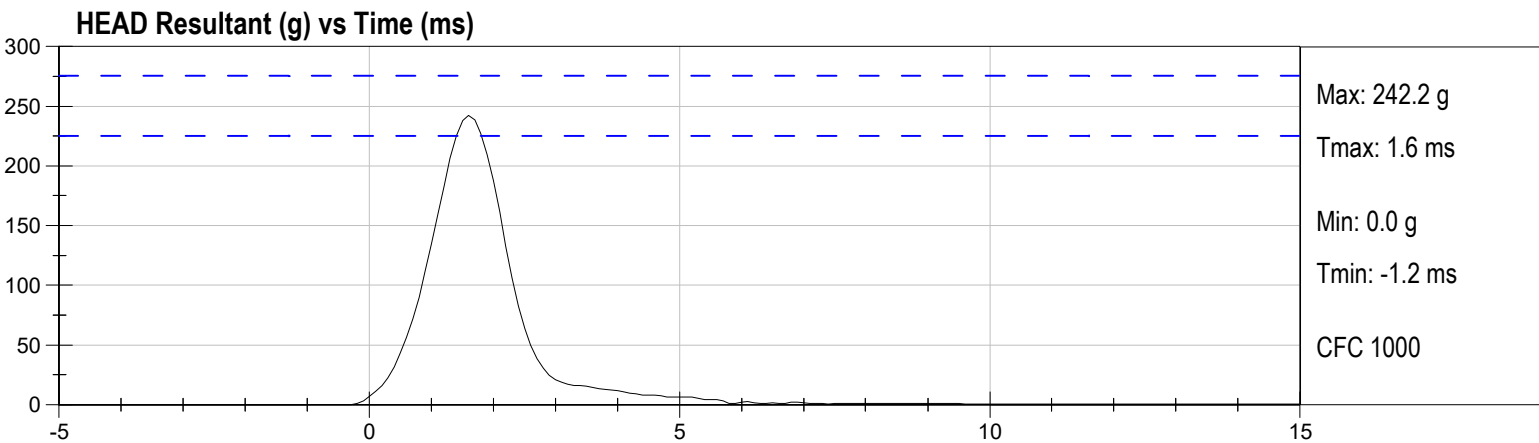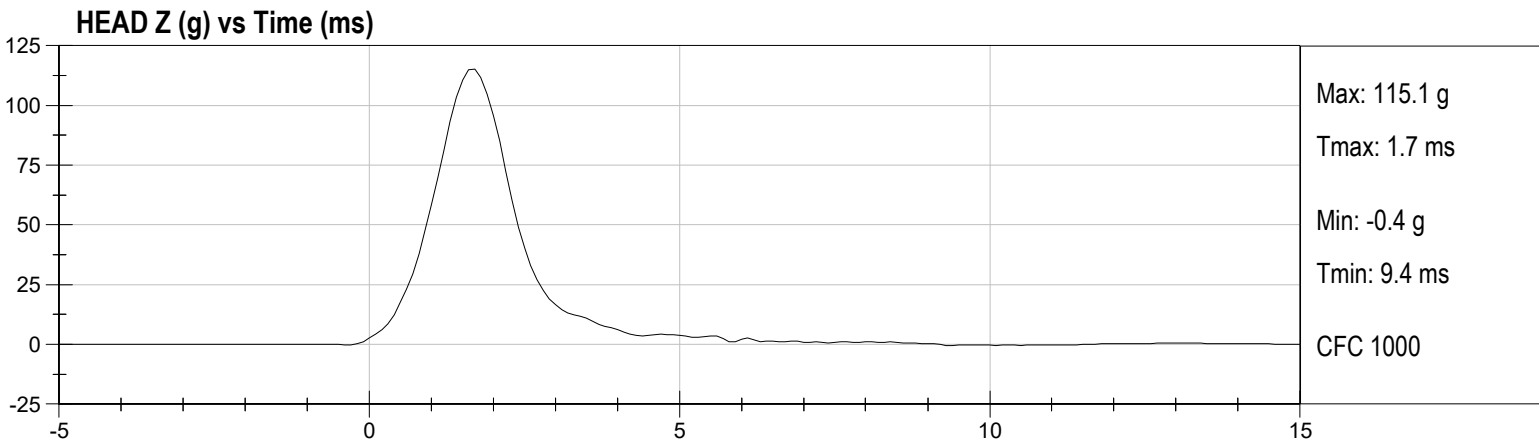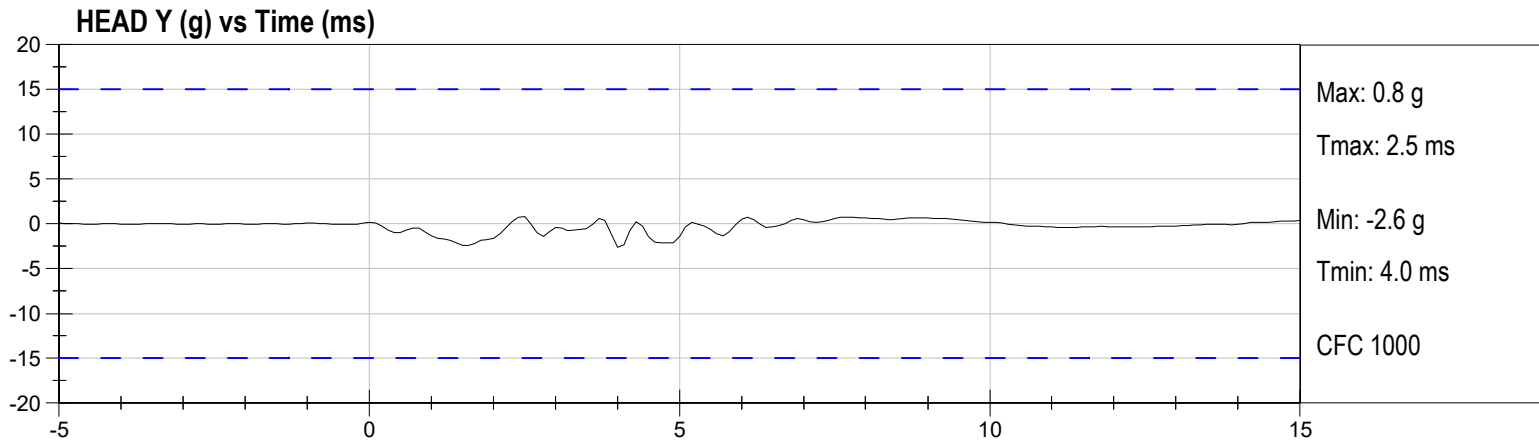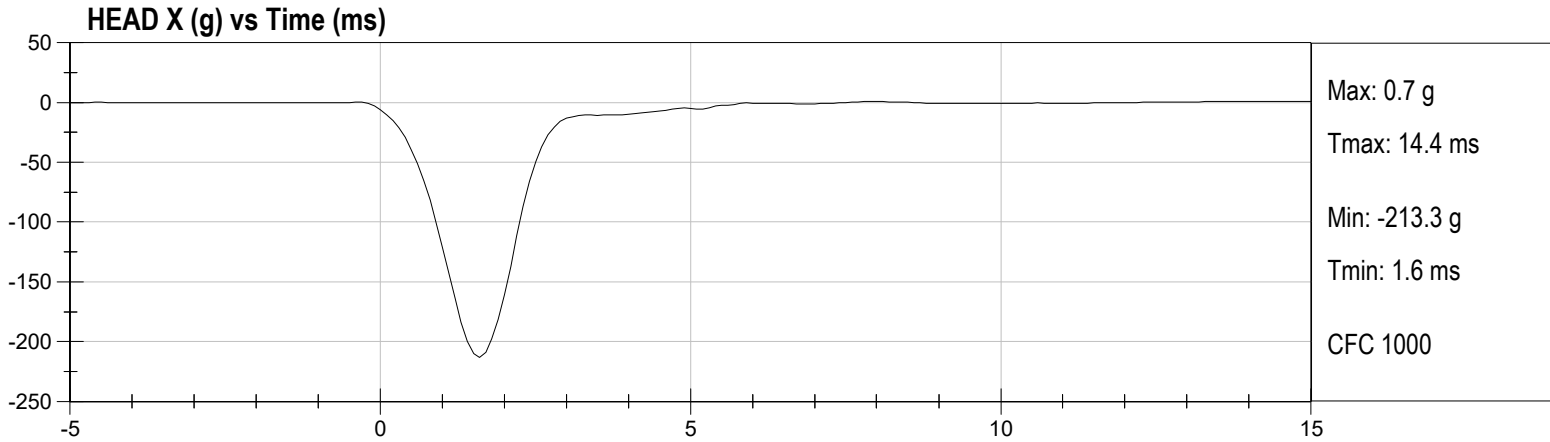


| Tested Parameter                               | Units | Specification  | Result | Pass/Fail |
|------------------------------------------------|-------|----------------|--------|-----------|
| Laboratory Temperature                         | °C    | 20.6 to 22.2   | 20.9   | Pass      |
| Laboratory Relative Humidity                   | %     | 10 to 70       | 44     | Pass      |
| Pendulum Velocity                              | m/s   | 6.89 to 7.13   | 7.13   | Pass      |
| Pendulum Deceleration At 10 ms After T0        | g     | 22.50 to 27.50 | 24.43  | Pass      |
| Pendulum Deceleration At 20 ms After T0        | g     | 17.60 to 22.60 | 20.82  | Pass      |
| Pendulum Deceleration At 30 ms After T0        | g     | 12.50 to 18.50 | 15.92  | Pass      |
| Peak Pendulum Deceleration After 30 ms         | g     | <= 29.0        | 15.8   | Pass      |
| Deceleration Decay Time to Cross 5 g           | ms    | 34.0 to 42.0   | 38.3   | Pass      |
| Maximum "D" Plane Rotation                     | deg   | 64.0 to 78.0   | 73.1   | Pass      |
| Time of Maximum "D" Plane Rotation             | ms    | 57.0 to 64.0   | 58.1   | Pass      |
| "D" Plane Rotation Decay Time To Zero Crossing | ms    | 113.0 to 128.0 | 113.8  | Pass      |
| Maximum Moment About Occipital Condyle         | Nm    | 88.1 to 108.5  | 99.7   | Pass      |
| Time of Maximum Moment About Occipital Condyle | ms    | 47.0 to 58.0   | 50.7   | Pass      |
| Positive Moment Decay Time To Zero Crossing    | ms    | 97.0 to 107.0  | 97.3   | Pass      |

| Channel       | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------------|--------------|---------------|------------------|----------------------|
| PEND. ACCEL.  | Endevco      | AH5P1         | 07/09/2025       | 1/8/2026             |
| NECK FORCE X  | Denton       | NG2202FX      | 05/07/2025       | 5/7/2026             |
| NECK MOMENT Y | Denton       | NG2202MY      | 05/07/2025       | 5/7/2026             |
| PEND. POT     | Servo        | 4707          | 02/25/2025       | 8/27/2025            |
| HEAD POT      | Servo        | 7297          | 02/25/2025       | 8/27/2025            |


PEND. ACCEL. (g) vs Time (ms)

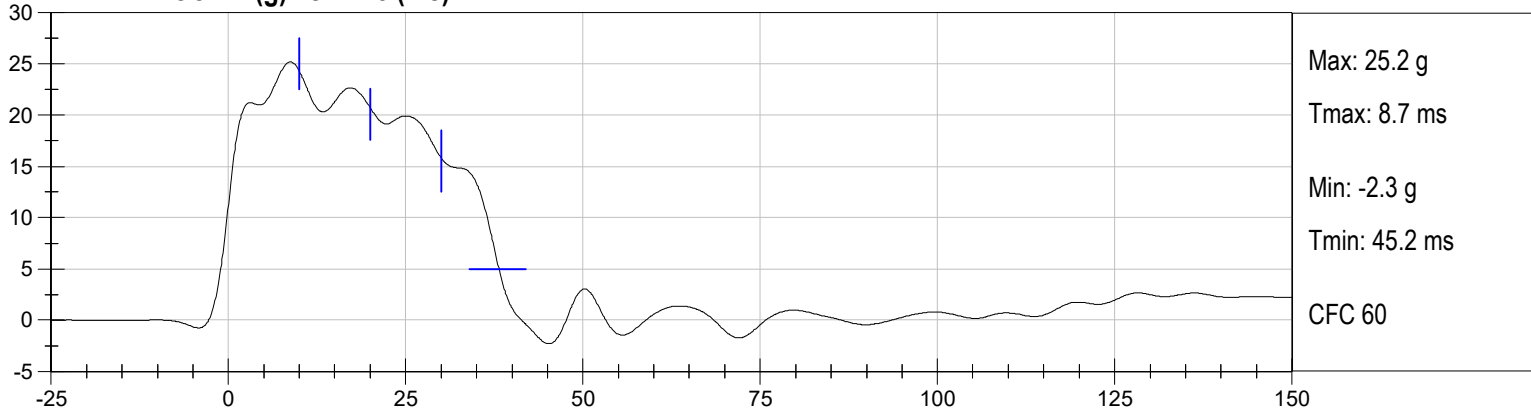

NECK ROTATION (deg) vs Time (ms)

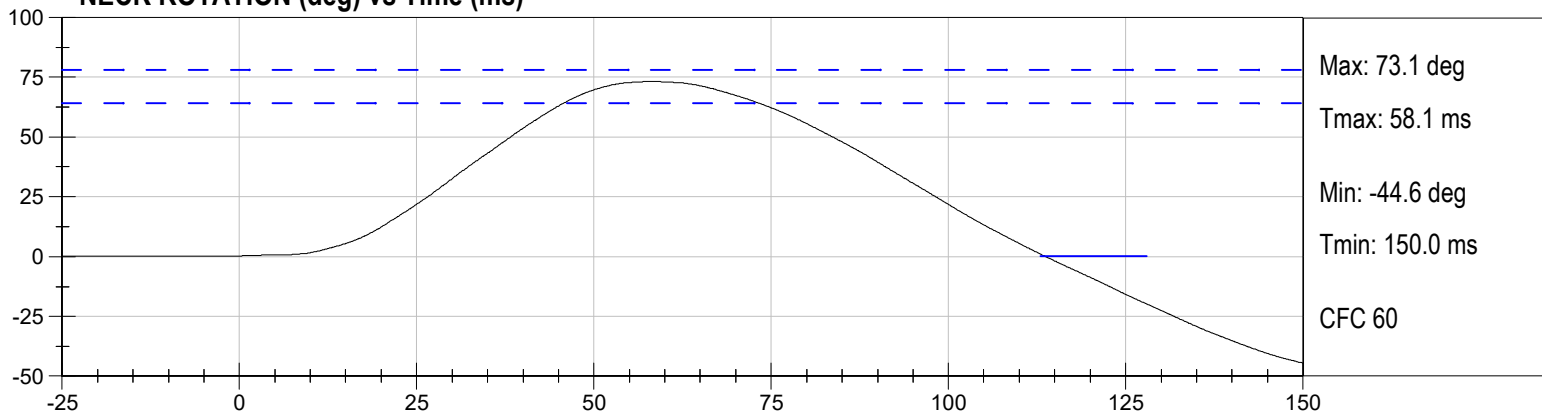

OCCIPITAL MOMENT (Nm) vs Time (ms)

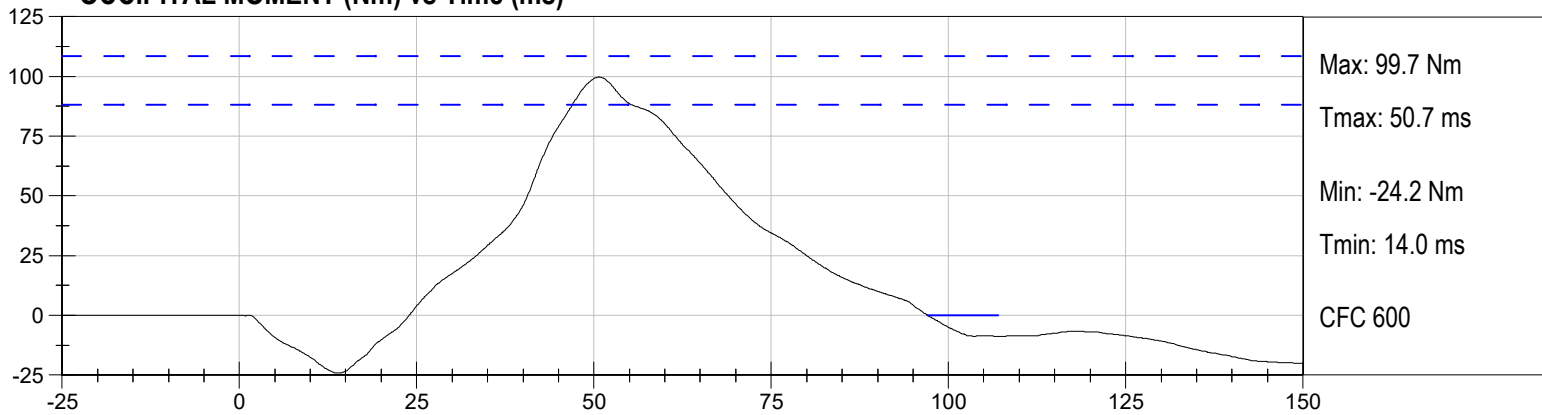





| Tested Parameter                               | Units | Specification  | Result | Pass/Fail |
|------------------------------------------------|-------|----------------|--------|-----------|
| Laboratory Temperature                         | °C    | 20.6 to 22.2   | 21.2   | Pass      |
| Laboratory Relative Humidity                   | %     | 10 to 70       | 44     | Pass      |
| Pendulum Velocity                              | m/s   | 5.95 to 6.19   | 6.05   | Pass      |
| Pendulum Deceleration At 10 ms After T0        | g     | 17.20 to 21.20 | 19.51  | Pass      |
| Pendulum Deceleration At 20 ms After T0        | g     | 14.00 to 19.00 | 17.62  | Pass      |
| Pendulum Deceleration At 30 ms After T0        | g     | 11.00 to 16.00 | 15.68  | Pass      |
| Peak Pendulum Deceleration After 30 ms         | g     | <= 22.0        | 15.7   | Pass      |
| Deceleration Decay Time to Cross 5 G's         | ms    | 38.0 to 46.0   | 38.6   | Pass      |
| Maximum "D" Plane Rotation                     | deg   | 81.0 to 106.0  | 99.3   | Pass      |
| Time of Maximum "D" Plane Rotation             | ms    | 72.0 to 82.0   | 76.8   | Pass      |
| "D" Plane Rotation Decay Time To Zero Crossing | ms    | 147.0 to 174.0 | 156.9  | Pass      |
| Minimum Moment About Occipital Condyle         | Nm    | -79.9 to -52.9 | -63.2  | Pass      |
| Time of Minimum Moment About Occipital Condyle | ms    | 65.0 to 79.0   | 72.4   | Pass      |
| Negative Moment Decay Time To Zero Crossing    | ms    | 120.0 to 148.0 | 141.9  | Pass      |

| Channel       | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------------|--------------|---------------|------------------|----------------------|
| PEND. ACCEL.  | Endevco      | AH5P1         | 07/09/2025       | 1/8/2026             |
| NECK FORCE X  | Denton       | NG2202FX      | 05/07/2025       | 5/7/2026             |
| NECK MOMENT Y | Denton       | NG2202MY      | 05/07/2025       | 5/7/2026             |
| PEND. POT     | Servo        | 4707          | 02/25/2025       | 8/27/2025            |
| HEAD POT      | Servo        | 7297          | 02/25/2025       | 8/27/2025            |


PEND. ACCEL. (g) vs Time (ms)

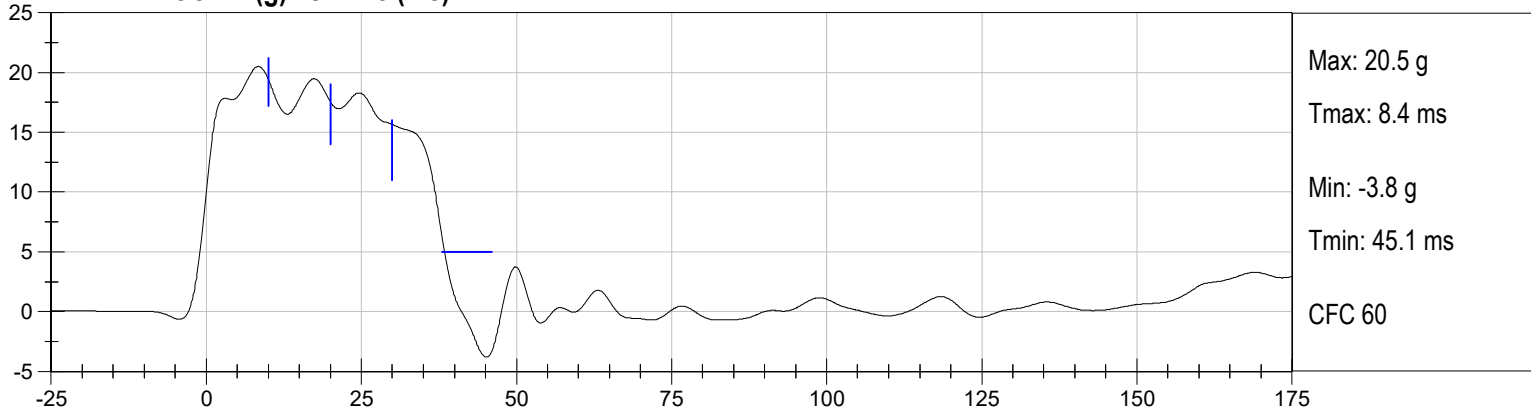

NECK ROTATION (deg) vs Time (ms)

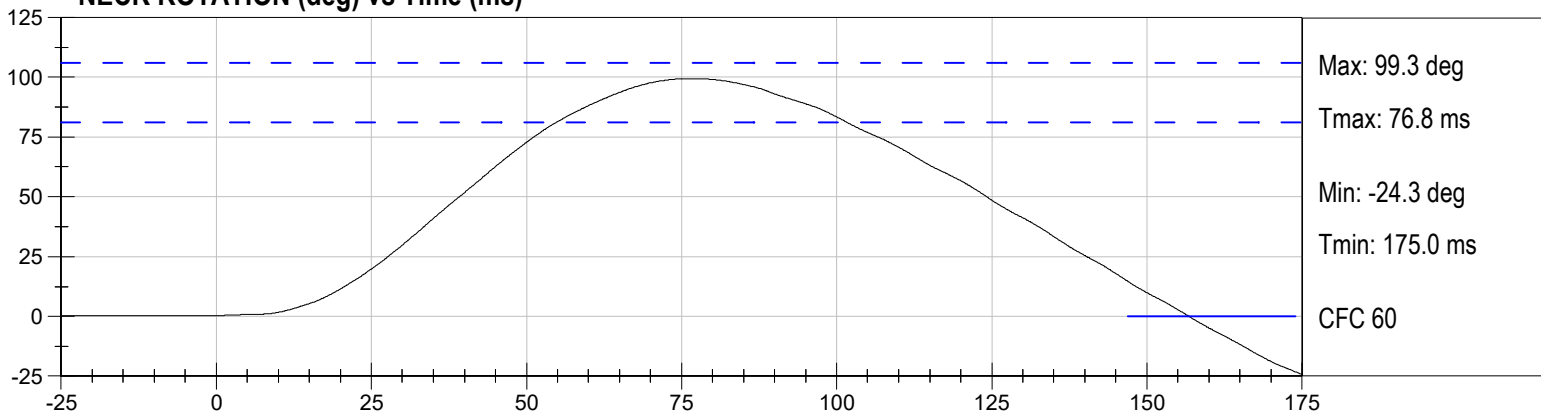

OCCIPITAL MOMENT (Nm) vs Time (ms)

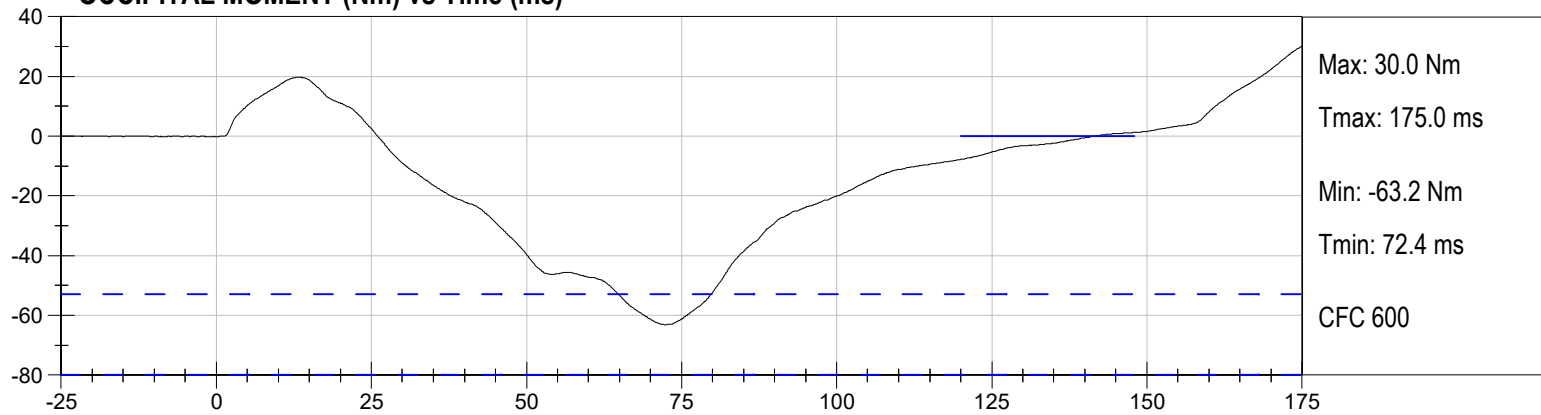



Thorax Impact Test  
Hybrid III 50th Percentile Male  
ATD Serial No: 064


Test Date: 08/05/2025  
Test ID: D252244  
Test Technician: Jonah Pulokas

| Tested Parameter             | Units | Specification | Result | Pass/Fail |
|------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature       | °C    | 20.6 to 22.2  | 21.3   | Pass      |
| Laboratory Relative Humidity | %     | 10 to 70      | 46     | Pass      |
| Probe Velocity               | m/s   | 6.58 to 6.82  | 6.68   | Pass      |
| Peak Probe Force             | N     | 5159 to 5893  | 5633   | Pass      |
| Peak Sternum Displacement    | cm    | 6.35 to 7.26  | 6.40   | Pass      |
| Internal Hysteresis          | %     | 69 to 85      | 76     | Pass      |


| Channel            | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|--------------------|--------------|---------------|------------------|----------------------|
| PROBE              | Endevco      | P79577        | 03/21/2025       | 9/20/2025            |
| CHEST DISPLACEMENT | Humanetics   | 064           | 05/21/2025       | 11/20/2025           |




**FORCE (N) vs CHEST DISPLACEMENT (cm)**

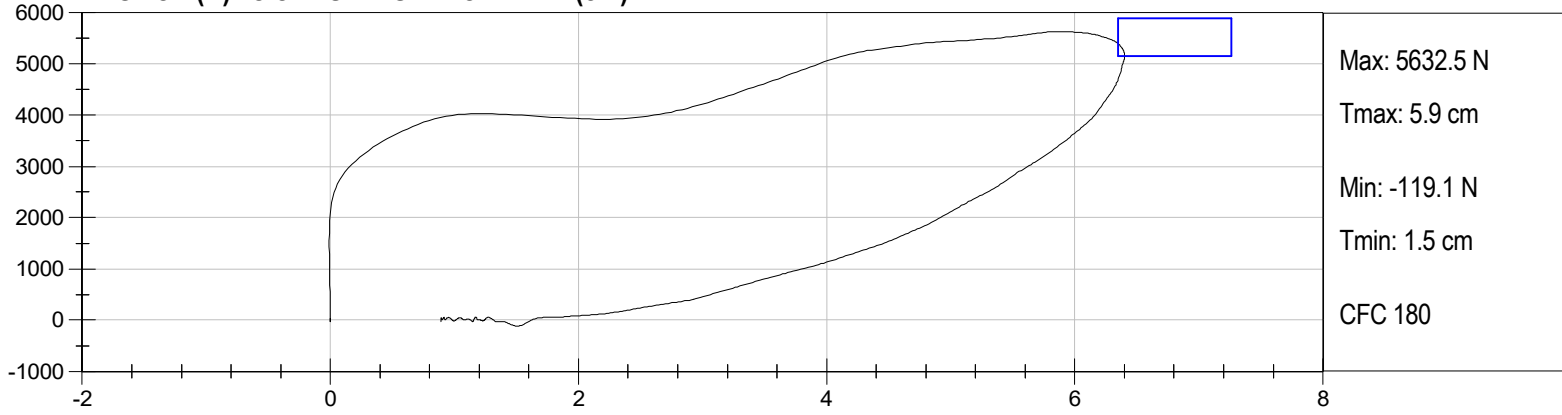

**FORCE (N) vs Time (ms)**

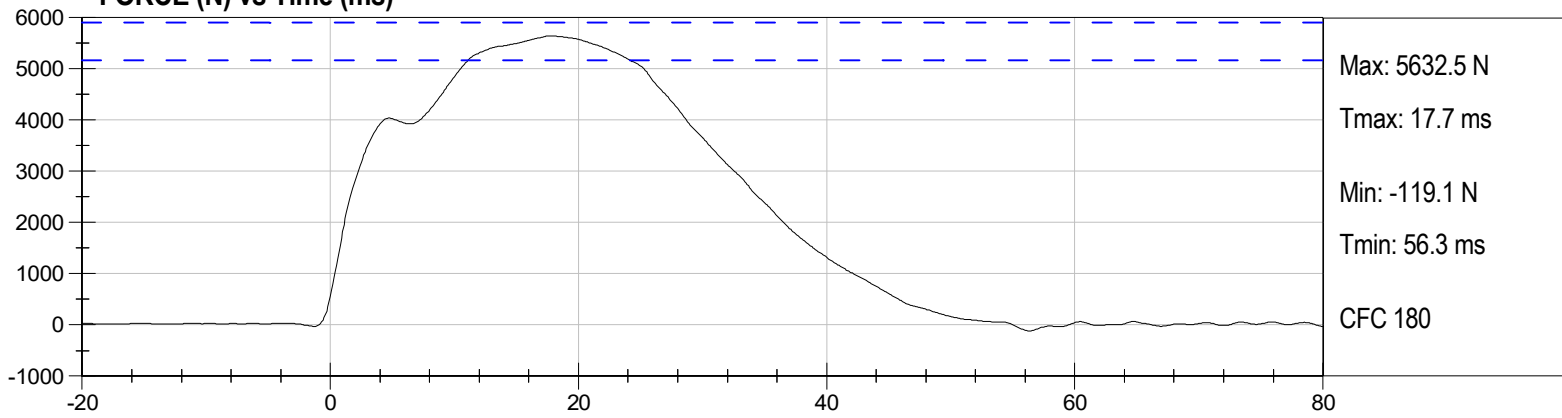

**CHEST DISPLACEMENT (cm) vs Time (ms)**

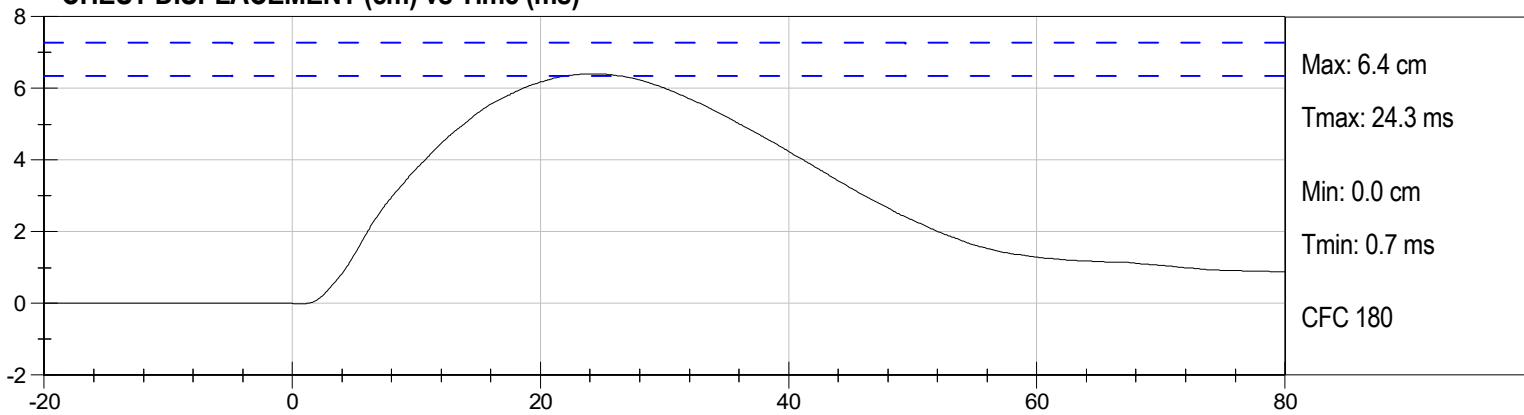




Right Knee Impact Test  
Hybrid III 50th Percentile Male  
ATD Serial No: 064

Test Date: 08/05/2025  
Test ID: D252245  
Test Technician: Jonah Pulokas

| Tested Parameter             | Units | Specification | Result | Pass/Fail |
|------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature       | °C    | 18.9 to 25.6  | 20.9   | Pass      |
| Laboratory Relative Humidity | %     | 10 to 70      | 43     | Pass      |
| Probe Velocity               | m/s   | 2.07 to 2.13  | 2.10   | Pass      |
| Peak Probe Force             | N     | 4715 to 5782  | 5144   | Pass      |

| Channel    | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|------------|--------------|---------------|------------------|----------------------|
| KNEE PROBE | Endevco      | P82128        | 05/30/2025       | 11/29/2025           |

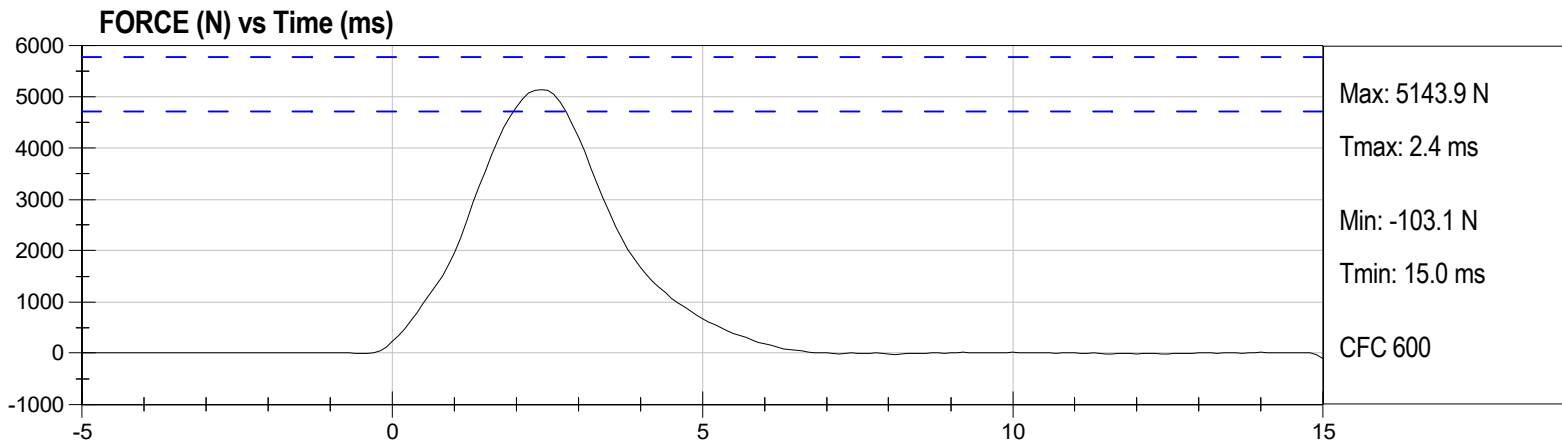






Left Knee Impact Test  
Hybrid III 50th Percentile Male  
ATD Serial No: 064

Test Date: 08/05/2025  
Test ID: D252246  
Test Technician: Jonah Pulokas

| Tested Parameter             | Units | Specification | Result | Pass/Fail |
|------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature       | °C    | 18.9 to 25.6  | 20.9   | Pass      |
| Laboratory Relative Humidity | %     | 10 to 70      | 43     | Pass      |
| Probe Velocity               | m/s   | 2.07 to 2.13  | 2.10   | Pass      |
| Peak Probe Force             | N     | 4715 to 5782  | 4890   | Pass      |

| Channel    | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|------------|--------------|---------------|------------------|----------------------|
| KNEE PROBE | Endevco      | P82128        | 05/30/2025       | 11/29/2025           |

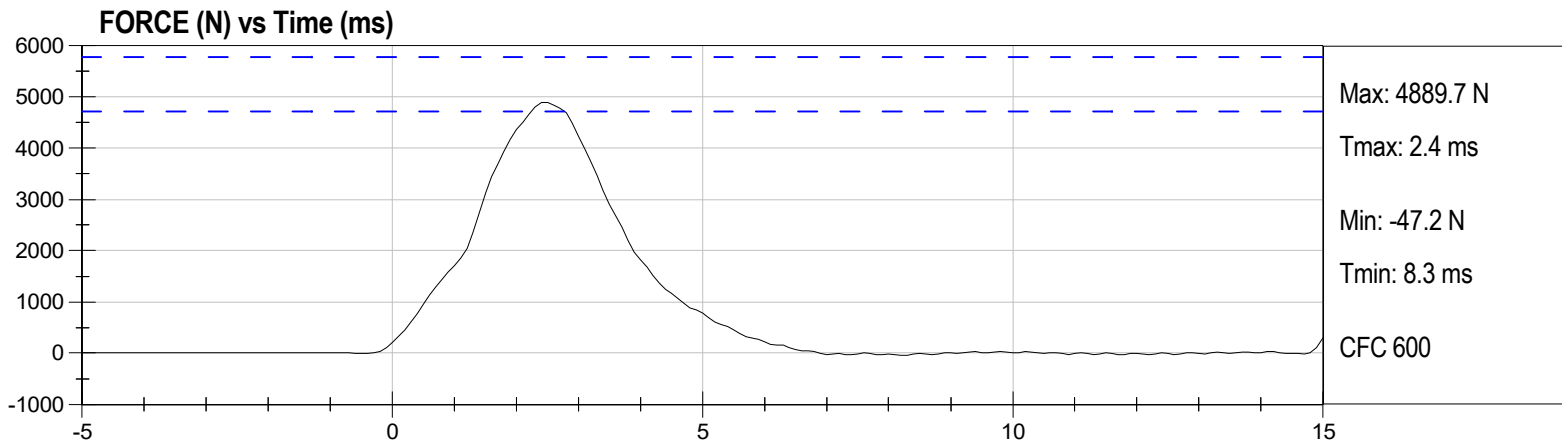




Right Hip-Femur Flexion Test  
Hybrid III 50th Percentile Male  
ATD Serial No: 064

Test Date: 08/05/2025  
Test ID: D252249  
Test Technician: Jonah Pulokas

| Tested Parameter             | Units | Specification | Result | Pass/Fail |
|------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature       | °C    | 18.9 to 25.6  | 21.1   | Pass      |
| Laboratory Relative Humidity | %     | 10 to 70      | 43     | Pass      |
| Rotation Rate                | deg/s | 5.0 to 10.0   | 6.5    | Pass      |
| Moment at 30 Degrees         | Nm    | <= 94.9       | 87.1   | Pass      |
| Rotation Angle at 203.4 Nm   | deg   | 40.0 to 50.0  | 46.4   | Pass      |

| Channel     | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|-------------|--------------|---------------|------------------|----------------------|
| LOAD CELL   | FTSS         | DS8350MY      | 03/11/2025       | 3/11/2026            |
| FRAME ANGLE | Servo        | 3966          | 03/27/2025       | 9/26/2025            |
| FEMUR ANGLE | Servo        | 4714          | 03/27/2025       | 9/26/2025            |

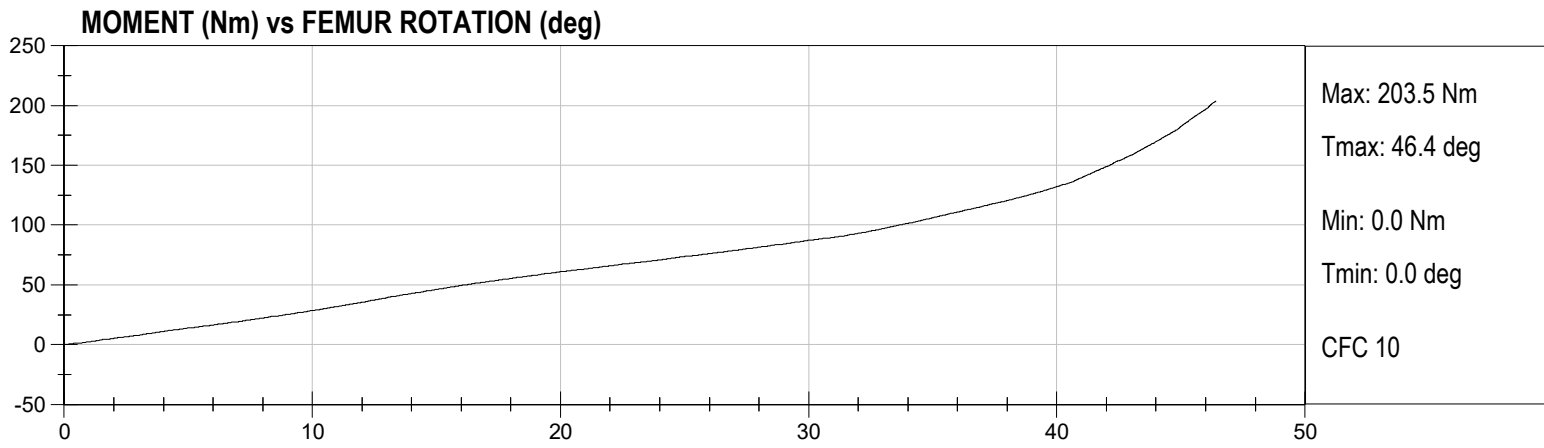






Left Hip-Femur Flexion Test  
Hybrid III 50th Percentile Male  
ATD Serial No: 064

Test Date: 08/05/2025  
Test ID: D252240  
Test Technician: Jonah Pulokas

| Tested Parameter             | Units | Specification | Result | Pass/Fail |
|------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature       | °C    | 18.9 to 25.6  | 21.1   | Pass      |
| Laboratory Relative Humidity | %     | 10 to 70      | 45     | Pass      |
| Rotation Rate                | deg/s | 5.0 to 10.0   | 6.5    | Pass      |
| Moment at 30 Degrees         | Nm    | <= 94.9       | 81.2   | Pass      |
| Rotation Angle at 203.4 Nm   | deg   | 40.0 to 50.0  | 46.2   | Pass      |

| Channel     | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|-------------|--------------|---------------|------------------|----------------------|
| LOAD CELL   | FTSS         | DS8350MY      | 03/11/2025       | 3/11/2026            |
| FRAME ANGLE | Servo        | 3966          | 03/27/2025       | 9/26/2025            |
| FEMUR ANGLE | Servo        | 4714          | 03/27/2025       | 9/26/2025            |

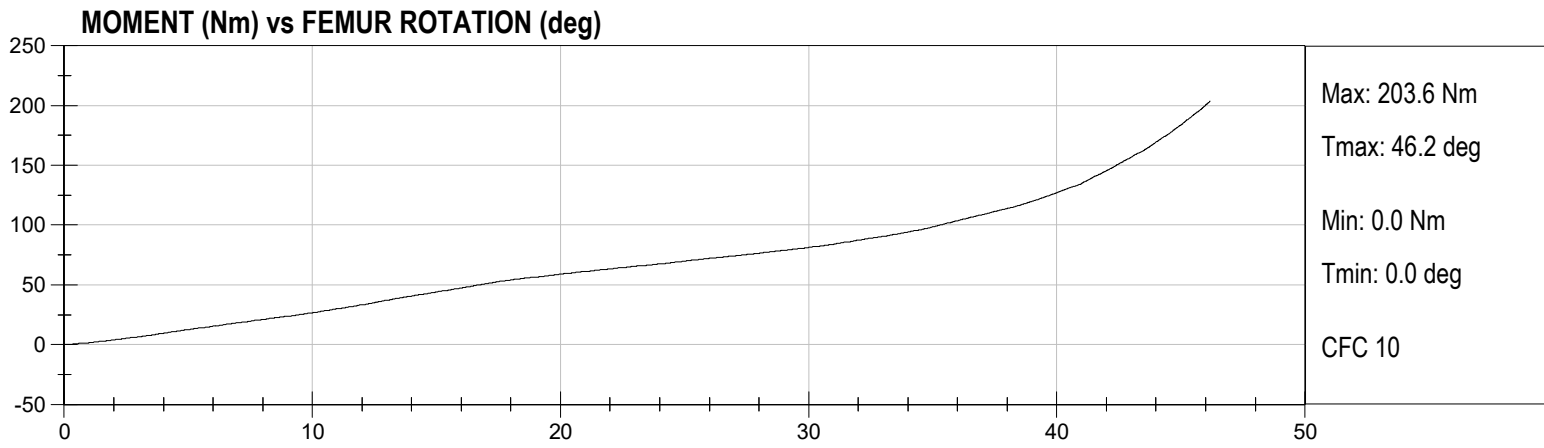

**QUALIFICATION TEST RESULTS**

**POST-TEST**

**HYBRID III 50<sup>TH</sup> PERCENTILE MALE - DRIVER ATD**







Head Drop Test  
Hybrid III 50th Percentile Male  
ATD Serial No: 064

Test Date: 09/05/2025  
Test ID: D252551  
Test Technician: Maggie LaRose

| Tested Parameter             | Units | Specification      | Result | Pass/Fail |
|------------------------------|-------|--------------------|--------|-----------|
| Laboratory Temperature       | °C    | 18.9 to 25.6       | 21.2   | Pass      |
| Laboratory Relative Humidity | %     | 10 to 70           | 38     | Pass      |
| Peak Resultant Acceleration  | g     | 225 to 275         | 230    | Pass      |
| Peak Lateral Acceleration    | g     | -15.0 to 15.0      | -0.9   | Pass      |
| Unimodal                     | %     | within 10% of peak | 1      | Pass      |

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------|--------------|---------------|------------------|----------------------|
| HEAD X  | Endevco      | T30974        | 05/27/2025       | 11/26/2025           |
| HEAD Y  | Endevco      | T30975        | 05/27/2025       | 11/26/2025           |
| HEAD Z  | Endevco      | T30976        | 05/27/2025       | 11/26/2025           |




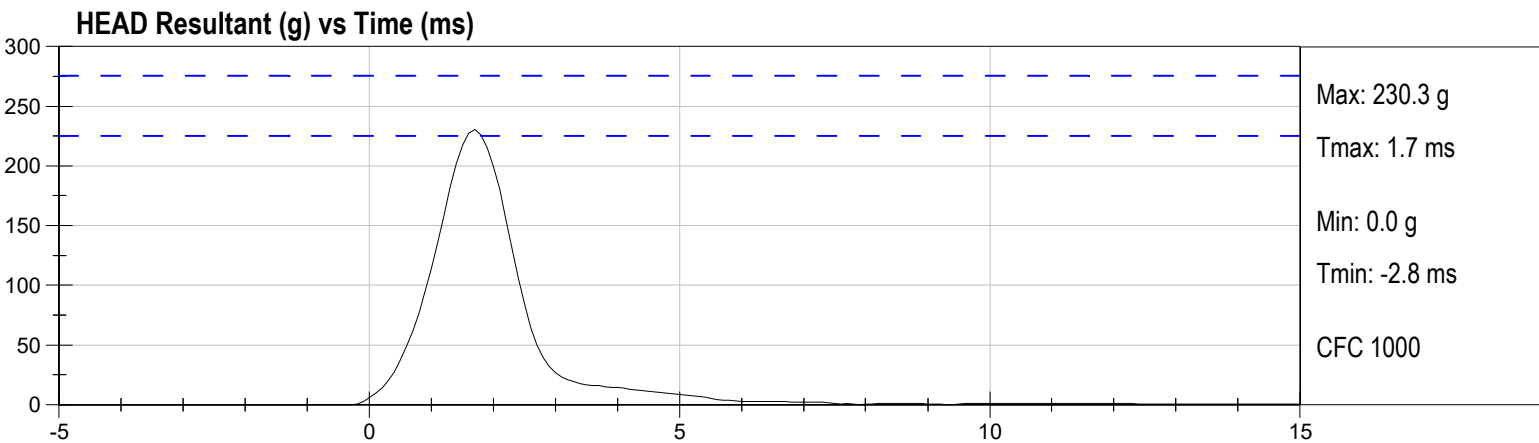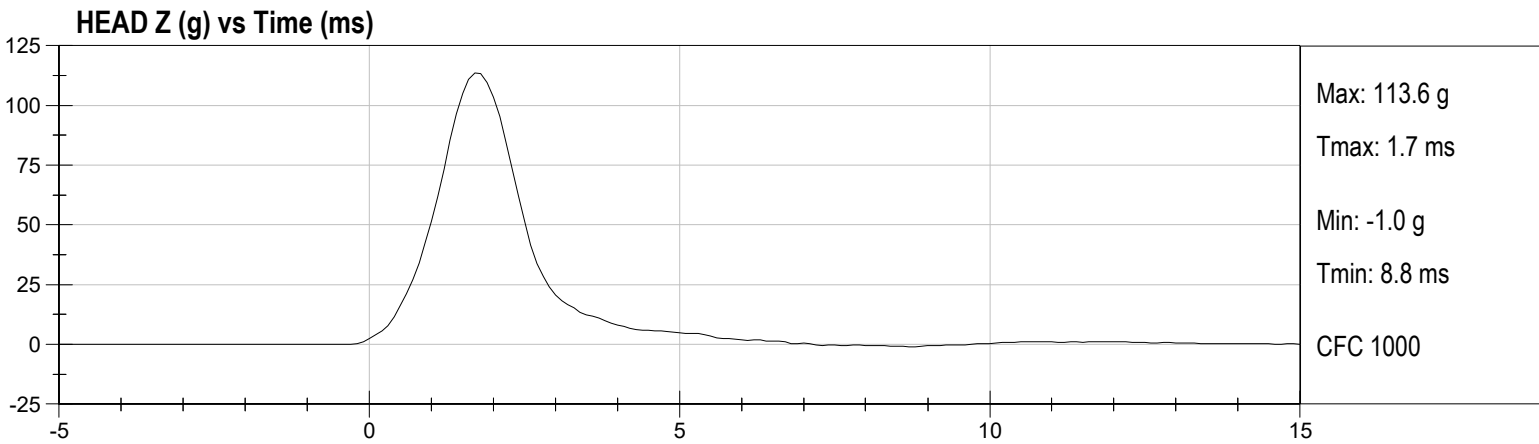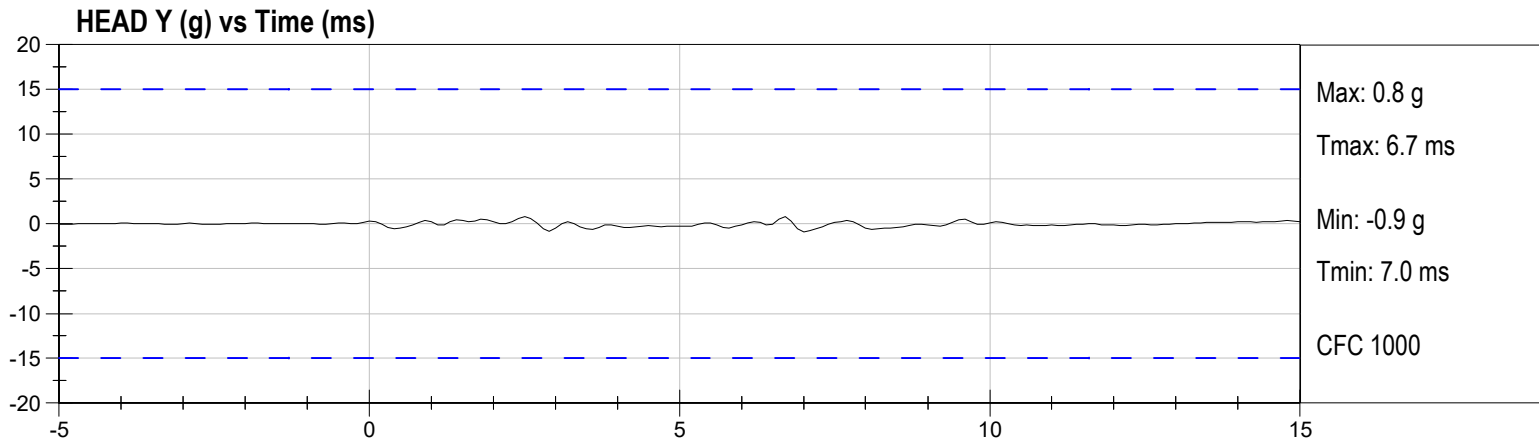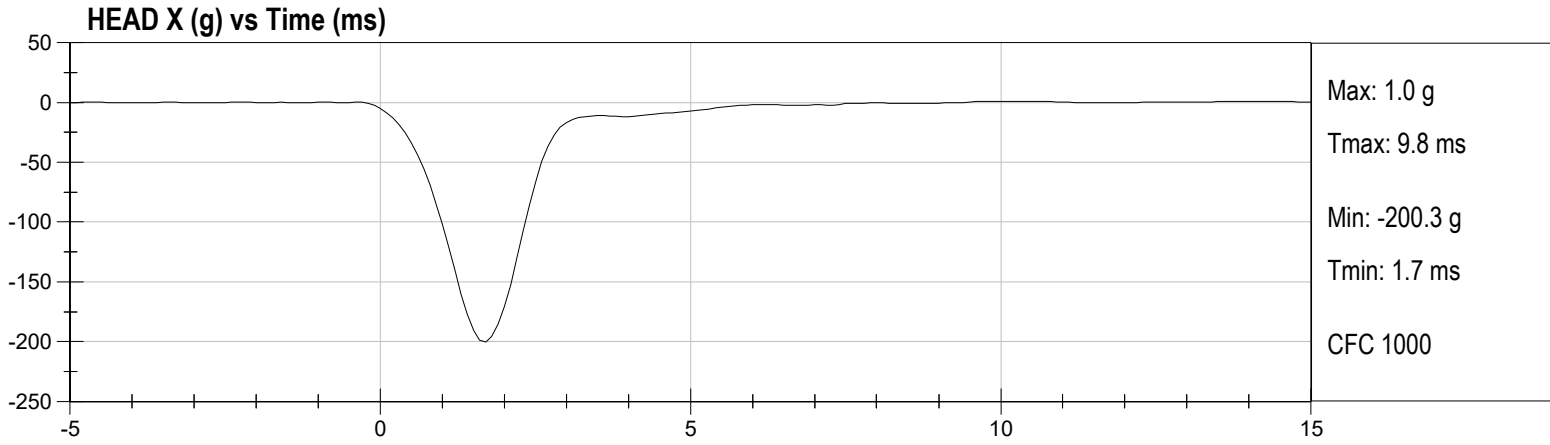


| Tested Parameter                               | Units | Specification  | Result | Pass/Fail |
|------------------------------------------------|-------|----------------|--------|-----------|
| Laboratory Temperature                         | °C    | 20.6 to 22.2   | 21.2   | Pass      |
| Laboratory Relative Humidity                   | %     | 10 to 70       | 39     | Pass      |
| Pendulum Velocity                              | m/s   | 6.89 to 7.13   | 6.89   | Pass      |
| Pendulum Deceleration At 10 ms After T0        | g     | 22.50 to 27.50 | 25.35  | Pass      |
| Pendulum Deceleration At 20 ms After T0        | g     | 17.60 to 22.60 | 21.77  | Pass      |
| Pendulum Deceleration At 30 ms After T0        | g     | 12.50 to 18.50 | 15.69  | Pass      |
| Peak Pendulum Deceleration After 30 ms         | g     | <= 29.0        | 15.6   | Pass      |
| Deceleration Decay Time to Cross 5 g           | ms    | 34.0 to 42.0   | 36.2   | Pass      |
| Maximum "D" Plane Rotation                     | deg   | 64.0 to 78.0   | 71.6   | Pass      |
| Time of Maximum "D" Plane Rotation             | ms    | 57.0 to 64.0   | 57.3   | Pass      |
| "D" Plane Rotation Decay Time To Zero Crossing | ms    | 113.0 to 128.0 | 113.5  | Pass      |
| Maximum Moment About Occipital Condyle         | Nm    | 88.1 to 108.5  | 96.8   | Pass      |
| Time of Maximum Moment About Occipital Condyle | ms    | 47.0 to 58.0   | 48.6   | Pass      |
| Positive Moment Decay Time To Zero Crossing    | ms    | 97.0 to 107.0  | 97.5   | Pass      |

| Channel       | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------------|--------------|---------------|------------------|----------------------|
| PEND. ACCEL.  | Endevco      | AH5P1         | 07/09/2025       | 1/8/2026             |
| NECK FORCE X  | Denton       | NG2202FX      | 05/07/2025       | 5/7/2026             |
| NECK MOMENT Y | Denton       | NG2202MY      | 05/07/2025       | 5/7/2026             |
| PEND. POT     | Servo        | 4707          | 08/13/2025       | 2/12/2026            |
| HEAD POT      | Servo        | 7297          | 08/13/2025       | 2/12/2026            |


PEND. ACCEL. (g) vs Time (ms)

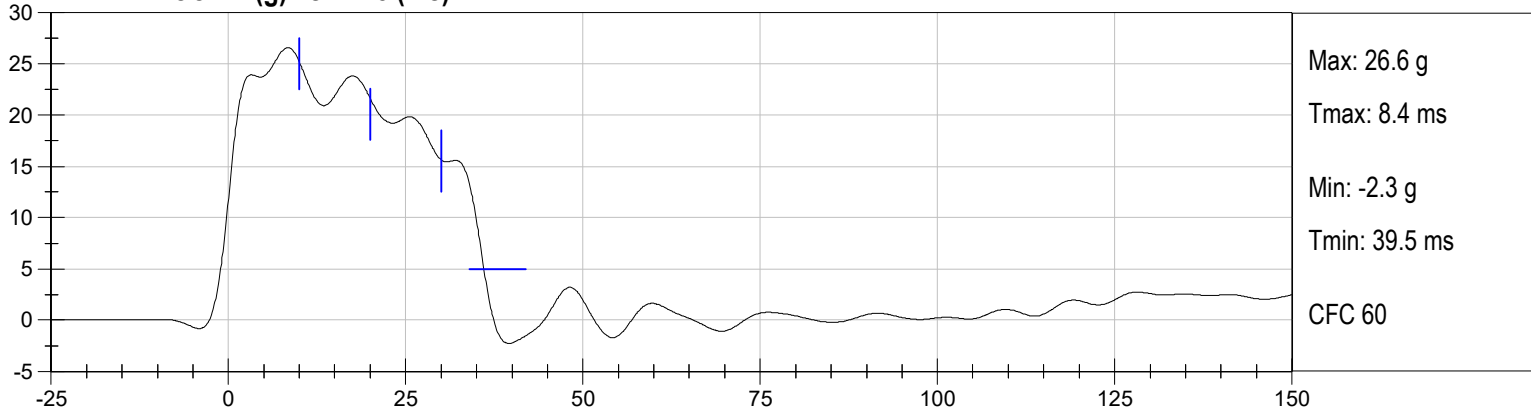

NECK ROTATION (deg) vs Time (ms)

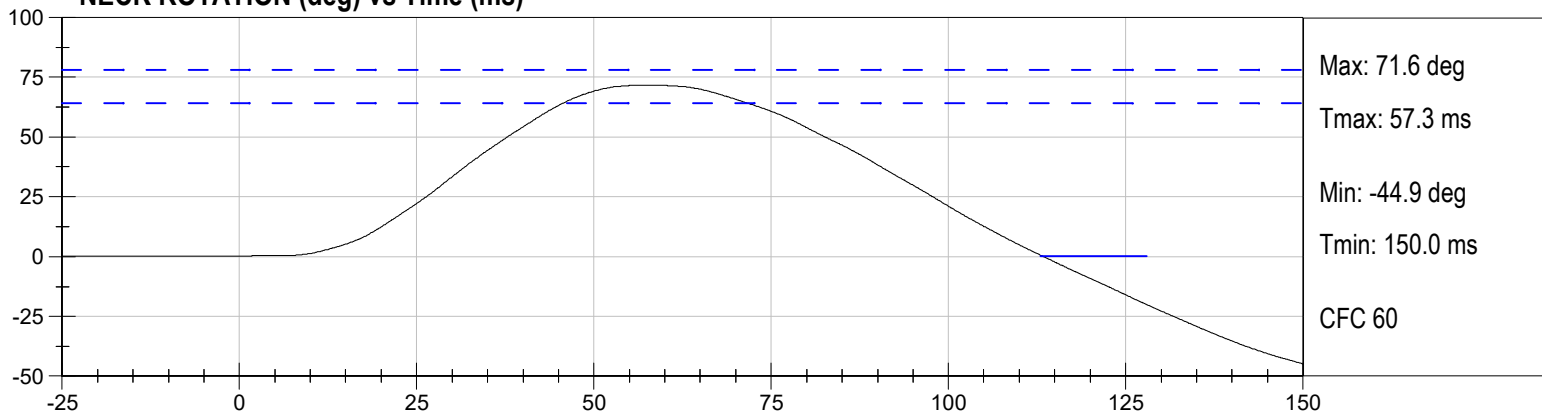

OCCIPITAL MOMENT (Nm) vs Time (ms)

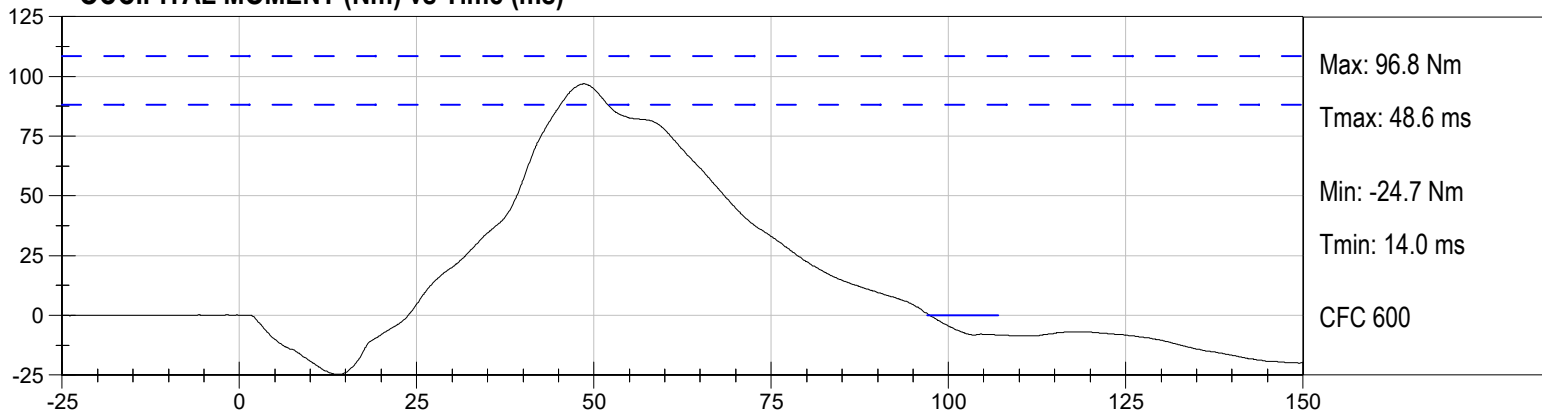


| Tested Parameter                               | Units | Specification  | Result | Pass/Fail |
|------------------------------------------------|-------|----------------|--------|-----------|
| Laboratory Temperature                         | °C    | 20.6 to 22.2   | 21.2   | Pass      |
| Laboratory Relative Humidity                   | %     | 10 to 70       | 39     | Pass      |
| Pendulum Velocity                              | m/s   | 5.95 to 6.19   | 6.05   | Pass      |
| Pendulum Deceleration At 10 ms After T0        | g     | 17.20 to 21.20 | 20.64  | Pass      |
| Pendulum Deceleration At 20 ms After T0        | g     | 14.00 to 19.00 | 17.16  | Pass      |
| Pendulum Deceleration At 30 ms After T0        | g     | 11.00 to 16.00 | 12.88  | Pass      |
| Peak Pendulum Deceleration After 30 ms         | g     | <= 22.0        | 13.0   | Pass      |
| Deceleration Decay Time to Cross 5 G's         | ms    | 38.0 to 46.0   | 40.6   | Pass      |
| Maximum "D" Plane Rotation                     | deg   | 81.0 to 106.0  | 100.0  | Pass      |
| Time of Maximum "D" Plane Rotation             | ms    | 72.0 to 82.0   | 78.7   | Pass      |
| "D" Plane Rotation Decay Time To Zero Crossing | ms    | 147.0 to 174.0 | 158.1  | Pass      |
| Minimum Moment About Occipital Condyle         | Nm    | -79.9 to -52.9 | -63.0  | Pass      |
| Time of Minimum Moment About Occipital Condyle | ms    | 65.0 to 79.0   | 72.5   | Pass      |
| Negative Moment Decay Time To Zero Crossing    | ms    | 120.0 to 148.0 | 142.5  | Pass      |


| Channel       | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------------|--------------|---------------|------------------|----------------------|
| PEND. ACCEL.  | Endevco      | AH5P1         | 07/09/2025       | 1/8/2026             |
| NECK FORCE X  | Denton       | NG2202FX      | 05/07/2025       | 5/7/2026             |
| NECK MOMENT Y | Denton       | NG2202MY      | 05/07/2025       | 5/7/2026             |
| PEND. POT     | Servo        | 4707          | 08/13/2025       | 2/12/2026            |
| HEAD POT      | Servo        | 7297          | 08/13/2025       | 2/12/2026            |




PEND. ACCEL. (g) vs Time (ms)

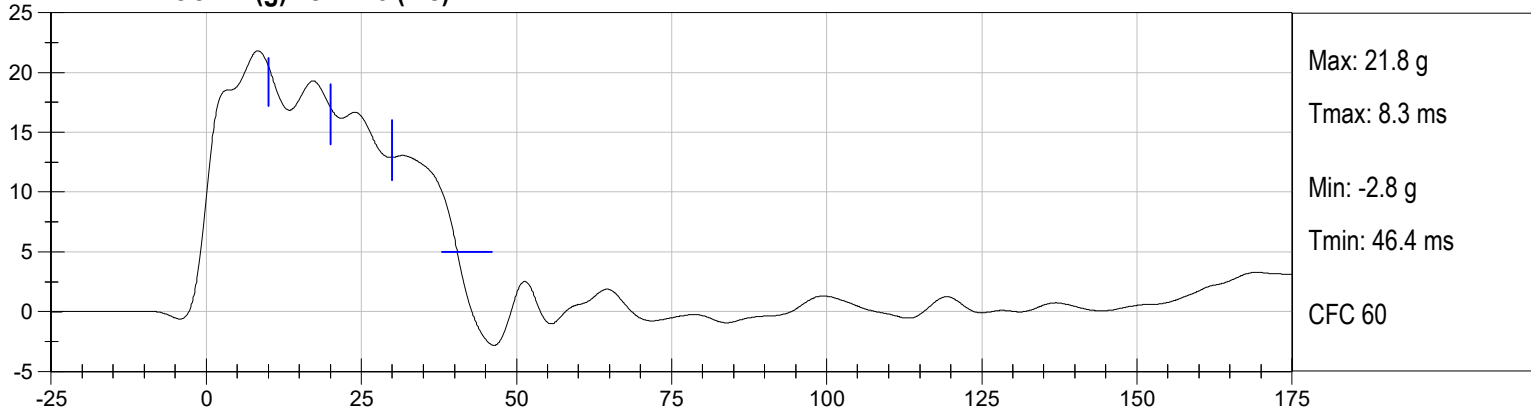

NECK ROTATION (deg) vs Time (ms)

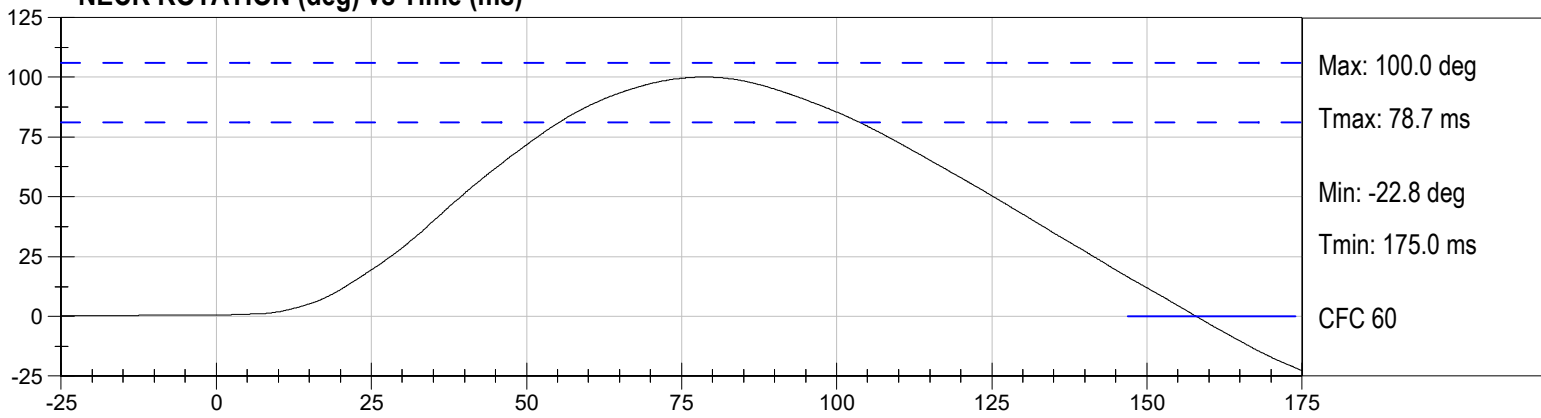

OCCIPITAL MOMENT (Nm) vs Time (ms)

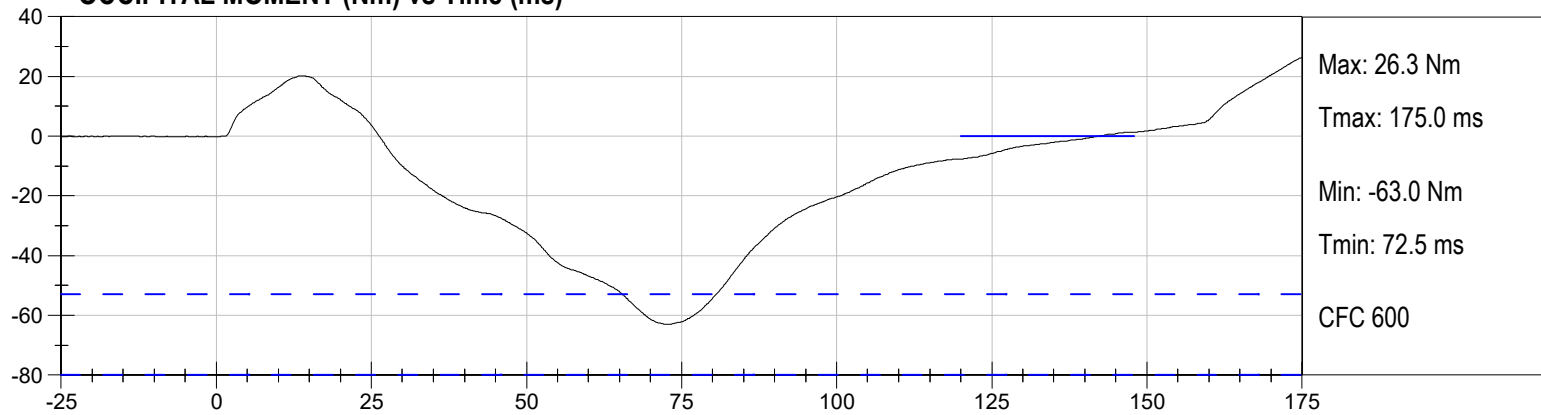




Thorax Impact Test  
Hybrid III 50th Percentile Male  
ATD Serial No: 064

Test Date: 09/05/2025  
Test ID: D252554  
Test Technician: Maggie LaRose


| Tested Parameter             | Units | Specification | Result | Pass/Fail |
|------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature       | °C    | 20.6 to 22.2  | 21.3   | Pass      |
| Laboratory Relative Humidity | %     | 10 to 70      | 38     | Pass      |
| Probe Velocity               | m/s   | 6.58 to 6.82  | 6.77   | Pass      |
| Peak Probe Force             | N     | 5159 to 5893  | 5616   | Pass      |
| Peak Sternum Displacement    | cm    | 6.35 to 7.26  | 6.43   | Pass      |
| Internal Hysteresis          | %     | 69 to 85      | 75     | Pass      |

| Channel            | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|--------------------|--------------|---------------|------------------|----------------------|
| PROBE              | Endevco      | P79577        | 03/21/2025       | 9/20/2025            |
| CHEST DISPLACEMENT | Humanetics   | 064           | 05/21/2025       | 11/20/2025           |


**FORCE (N) vs CHEST DISPLACEMENT (cm)**

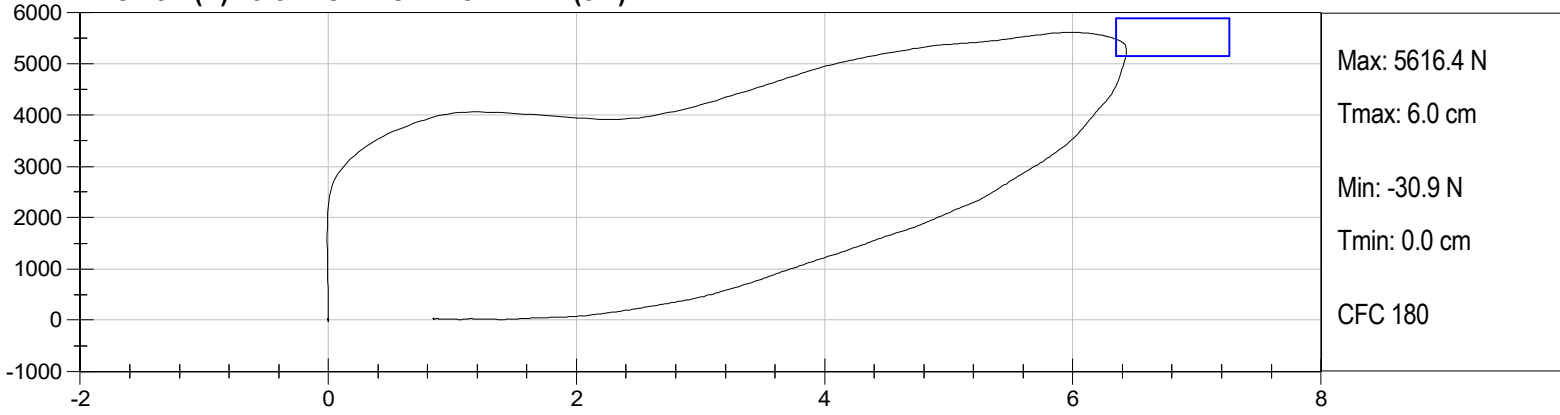

**FORCE (N) vs Time (ms)**

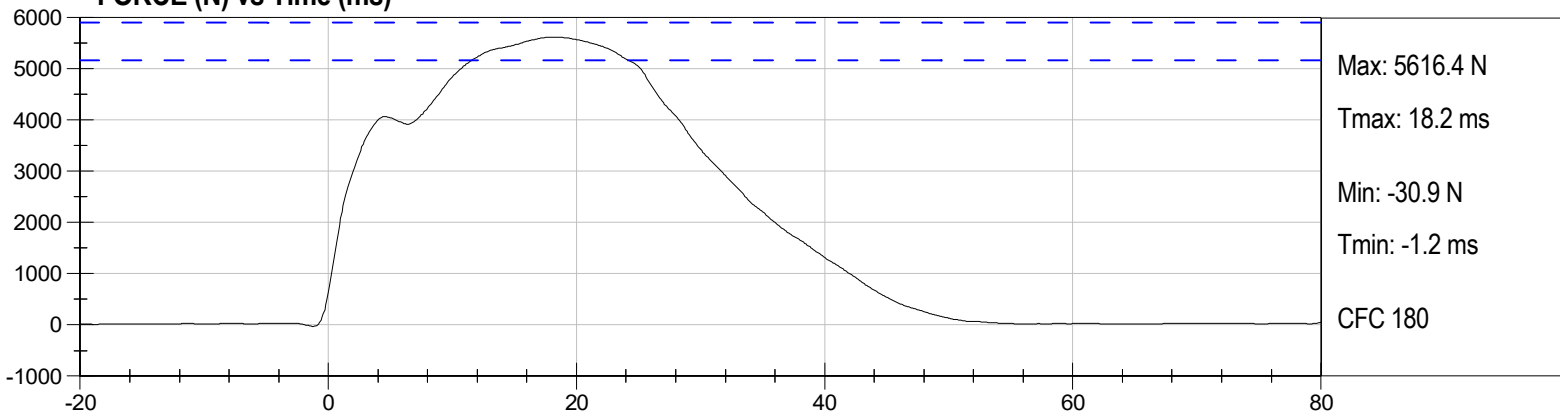

**CHEST DISPLACEMENT (cm) vs Time (ms)**

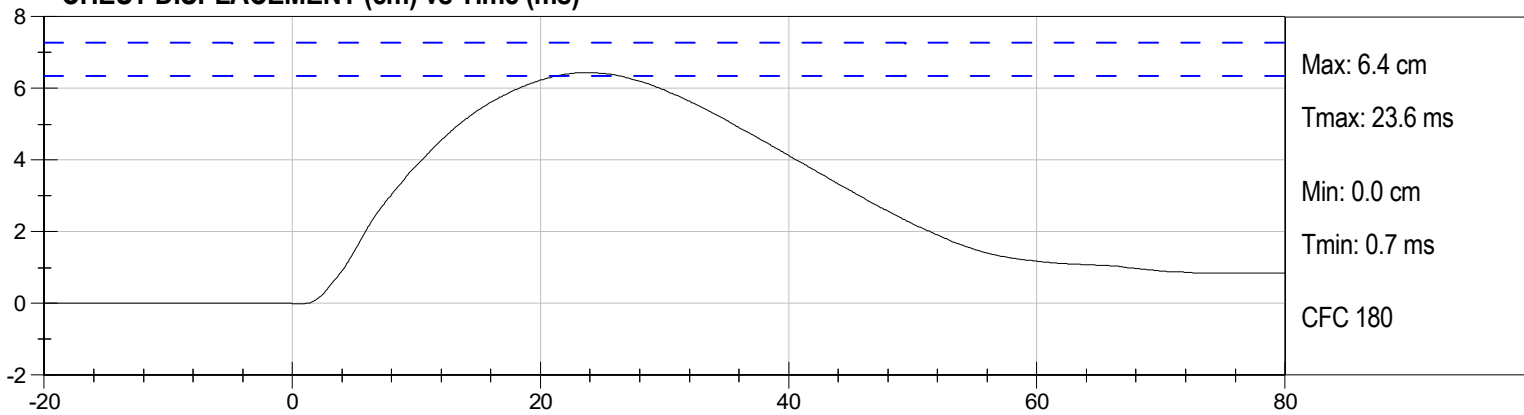




Right Knee Impact Test  
Hybrid III 50th Percentile Male  
ATD Serial No: 064

Test Date: 09/05/2025  
Test ID: D252555  
Test Technician: Maggie LaRose

| Tested Parameter             | Units | Specification | Result | Pass/Fail |
|------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature       | °C    | 18.9 to 25.6  | 21.2   | Pass      |
| Laboratory Relative Humidity | %     | 10 to 70      | 38     | Pass      |
| Probe Velocity               | m/s   | 2.07 to 2.13  | 2.13   | Pass      |
| Peak Probe Force             | N     | 4715 to 5782  | 5193   | Pass      |

| Channel    | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|------------|--------------|---------------|------------------|----------------------|
| KNEE PROBE | Endevco      | P82128        | 05/30/2025       | 11/29/2025           |



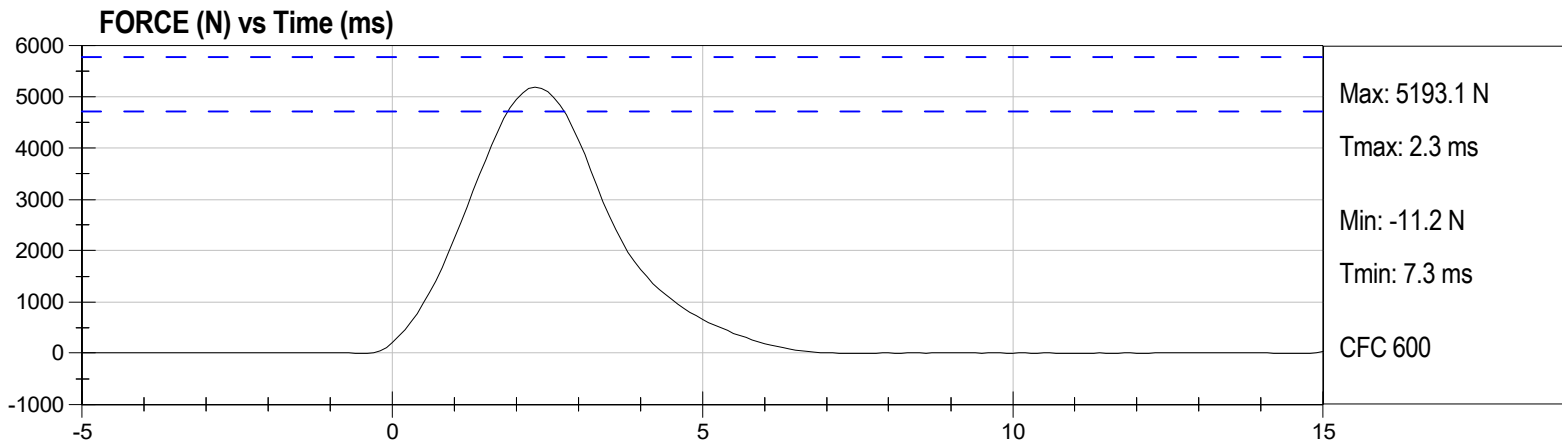




Left Knee Impact Test  
Hybrid III 50th Percentile Male  
ATD Serial No: 064

Test Date: 09/05/2025  
Test ID: D252556  
Test Technician: Maggie LaRose

| Tested Parameter             | Units | Specification | Result | Pass/Fail |
|------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature       | °C    | 18.9 to 25.6  | 21.2   | Pass      |
| Laboratory Relative Humidity | %     | 10 to 70      | 38     | Pass      |
| Probe Velocity               | m/s   | 2.07 to 2.13  | 2.13   | Pass      |
| Peak Probe Force             | N     | 4715 to 5782  | 5161   | Pass      |

| Channel    | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|------------|--------------|---------------|------------------|----------------------|
| KNEE PROBE | Endevco      | P82128        | 05/30/2025       | 11/29/2025           |

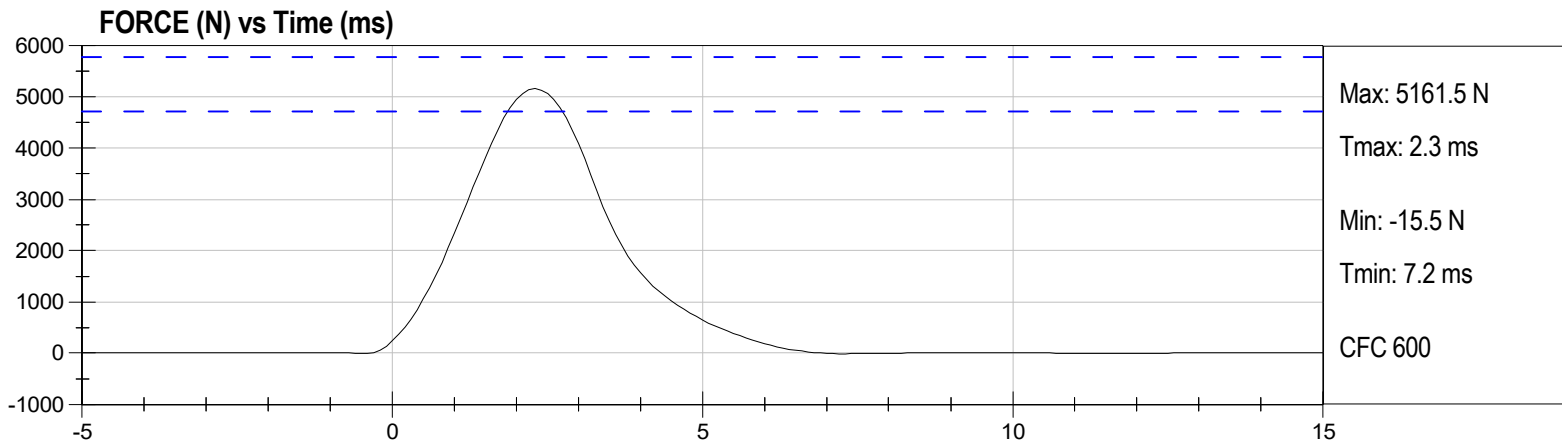




Right Hip-Femur Flexion Test  
Hybrid III 50th Percentile Male  
ATD Serial No: 064

Test Date: 09/05/2025  
Test ID: D252559  
Test Technician: Maggie LaRose

| Tested Parameter             | Units | Specification | Result | Pass/Fail |
|------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature       | °C    | 18.9 to 25.6  | 21.2   | Pass      |
| Laboratory Relative Humidity | %     | 10 to 70      | 38     | Pass      |
| Rotation Rate                | deg/s | 5.0 to 10.0   | 6.5    | Pass      |
| Moment at 30 Degrees         | Nm    | <= 94.9       | 83.7   | Pass      |
| Rotation Angle at 203.4 Nm   | deg   | 40.0 to 50.0  | 48.6   | Pass      |

| Channel     | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|-------------|--------------|---------------|------------------|----------------------|
| LOAD CELL   | FTSS         | DS8350MY      | 03/11/2025       | 3/11/2026            |
| FRAME ANGLE | Servo        | 3966          | 03/27/2025       | 9/26/2025            |
| FEMUR ANGLE | Servo        | 4714          | 03/27/2025       | 9/26/2025            |



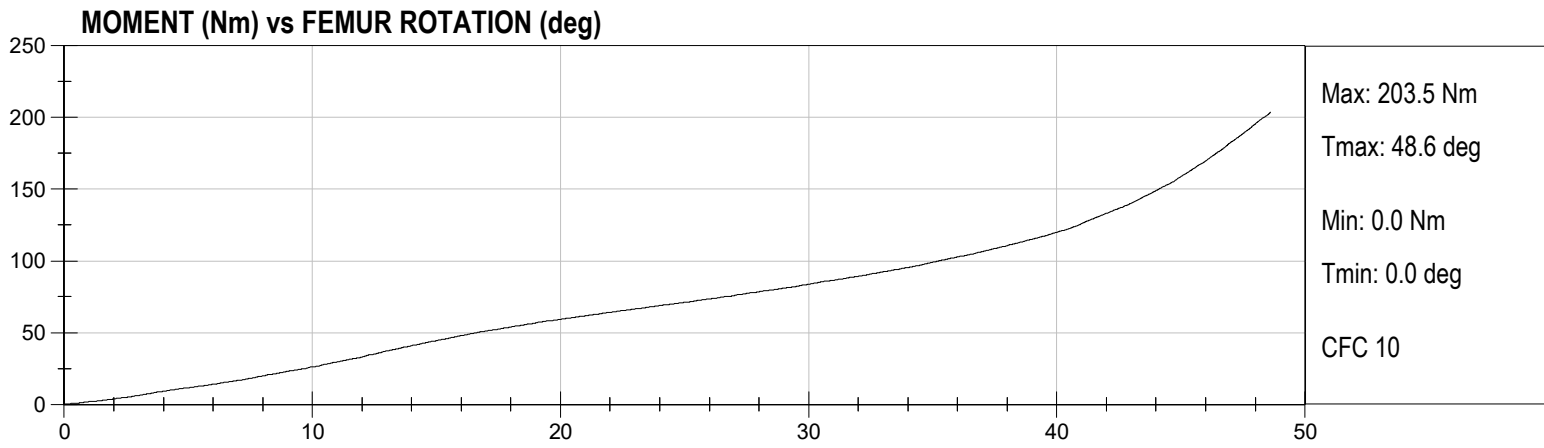




Left Hip-Femur Flexion Test  
Hybrid III 50th Percentile Male  
ATD Serial No: 064

Test Date: 09/05/2025  
Test ID: D252550  
Test Technician: Maggie LaRose

| Tested Parameter             | Units | Specification | Result | Pass/Fail |
|------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature       | °C    | 18.9 to 25.6  | 21.2   | Pass      |
| Laboratory Relative Humidity | %     | 10 to 70      | 38     | Pass      |
| Rotation Rate                | deg/s | 5.0 to 10.0   | 6.5    | Pass      |
| Moment at 30 Degrees         | Nm    | <= 94.9       | 77.8   | Pass      |
| Rotation Angle at 203.4 Nm   | deg   | 40.0 to 50.0  | 47.0   | Pass      |

| Channel     | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|-------------|--------------|---------------|------------------|----------------------|
| LOAD CELL   | FTSS         | DS8350MY      | 03/11/2025       | 3/11/2026            |
| FRAME ANGLE | Servo        | 3966          | 03/27/2025       | 9/26/2025            |
| FEMUR ANGLE | Servo        | 4714          | 03/27/2025       | 9/26/2025            |

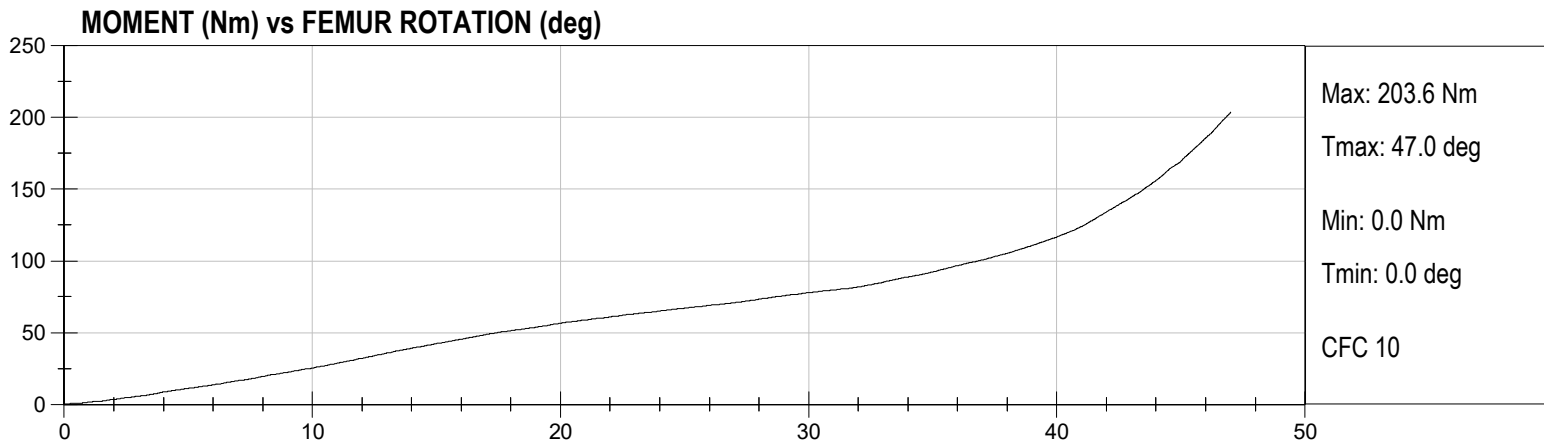

## **QUALIFICATION TEST RESULTS**

### **PRE-TEST**

**HYBRID III 5<sup>TH</sup> PERCENTILE FEMALE - PASSENGER ATD**



**Hybrid III, 5th External Measurements**  
**SN: 142**

| HYBRID III, PART 572, SUBPART O EXTERNAL DIMENSIONS |                                   |                                                                                                                                              |                               |                       |
|-----------------------------------------------------|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|-----------------------|
| DIMENSION                                           | DESCRIPTION                       | DETAILS                                                                                                                                      | ASSEMBLY<br>DIMENSION<br>(mm) | ACTUAL<br>MEASUREMENT |
| A                                                   | TOTAL SITTING HEIGHT              | Seat surface to highest point on top of the head.                                                                                            | 774.7-800.1                   | 775.0                 |
| B                                                   | SHOULDER PIVOT HEIGHT             | Centerline of shoulder pivot bolt to the seat surface.                                                                                       | 431.8-457.2                   | 438.2                 |
| C                                                   | H-POINT HEIGHT                    | Reference                                                                                                                                    | 81.3-86.3                     | 81.8                  |
| D                                                   | H-POINT LOCATION FROM<br>BACKLINE | Reference                                                                                                                                    | 144.8-149.8                   | 148.3                 |
| E                                                   | SHOULDER PIVOT FROM<br>BACKLINE   | Center of the shoulder clevis to the rear vertical surface of the fixture.                                                                   | 68.6-83.8                     | 83.0                  |
| F                                                   | THIGH CLEARANCE                   | Measured at the highest point on the upper femur segment.                                                                                    | 119.4-134.6                   | 124.4                 |
| G                                                   | BACK OF ELBOW TO<br>WRIST PIVOT   | back of the elbow flesh to the wrist pivot in line with the elbow and wrist pivots                                                           | 243.9-259.1                   | 245.2                 |
| H                                                   | HEAD BACK TO BACKLINE             | Back of Skull cap skin to seat rear vertical surface (Reference)                                                                             | 43.2-48.2                     | 43.4                  |
| I                                                   | SHOULDER TO- ELBOW<br>LENGTH      | Measure from the highest point on top of the shoulder clevis to the lowest part of the flesh on the elbow in line with the elbow pivot bolt. | 276.8-297.2                   | 281.1                 |
| J                                                   | ELBOW REST HEIGHT                 | Measure from the flesh below the elbow pivot bolt to the seat surface.                                                                       | 182.8-203.2                   | 197.2                 |
| K                                                   | BUTTOCK TO KNEE<br>LENGTH         | The forward most part of the knee flesh to the rear vertical surface of the fixture.                                                         | 520.7-546.1                   | 537.2                 |
| L                                                   | POPLITEAL HEIGHT                  | Seat surface to the plane of the horizontal plane of the bottom of the feet.                                                                 | 355.6-376                     | 358.8                 |
| M                                                   | KNEE PIVOT HEIGHT                 | Centerline of knee pivot bolt to the horizontal plane of the bottom of the feet.                                                             | 393.7-419.1                   | 403.1                 |
| N                                                   | BUTTOCK POPLITEAL<br>LENGTH       | The rearmost surface of the lower leg to the same point on the rear surface of the buttocks used for dim. "K".                               | 414-439.4                     | 435.2                 |

| HYBRID III, SUBPART O EXTERNAL DIMENSIONS, continued |                                                           |                                                         |                         |                    |
|------------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------------|-------------------------|--------------------|
| DIMENSION                                            | DESCRIPTION                                               | DETAILS                                                 | ASSEMBLY DIMENSION (mm) | ACTUAL MEASUREMENT |
| O                                                    | CHEST DEPTH WITHOUT JACKET                                | Measured $304.8 \pm 5.1$ mm above seat surface          | 175.3-190.5             | 181.2              |
| P                                                    | FOOT LENGTH                                               | Tip of toe to rear of heel                              | 218.5-233.7             | 227.3              |
| Q                                                    | STANDING HEIGHT                                           | (THEORETICAL)                                           | 1501.1                  | N/A                |
| R                                                    | BUTTOCK TO KNEE PIVOT LENGTH                              | The rear surface of the buttocks to the knee pivot bolt | 457.2-482.6             | 475.0              |
| S                                                    | HEAD BREADTH                                              | The widest part of the head                             | 137.1-147.3             | 138.6              |
| T                                                    | HEAD DEPTH                                                | Back of the head to the forehead                        | 177.8-188               | 181.0              |
| U                                                    | HIP BREADTH                                               | The widest part of the hip                              | 299.7-314.9             | 308.4              |
| V                                                    | SHOULDER BREADTH                                          | Outside edges of right and left shoulder clevises       | 350.5-365.7             | 362.1              |
| W                                                    | FOOT BREADTH                                              | The widest part of the foot                             | 78.8-94                 | 82.8               |
| X                                                    | HEAD CIRCUMFERENCE                                        | Measured at the point as in dim. "T"                    | 528.3-548.7             | 545.2              |
| Y                                                    | CHEST CIRCUMFERENCE (WITH CHEST JACKET)                   | Measured $345.4 \pm 12.7$ mm above seat surface         | 850.9-881.3             | 870.7              |
| Z                                                    | WAIST CIRCUMFERENCE                                       | Measured $165.1 \pm 5.1$ mm above seat surface          | 759.5-789.9             | 779.9              |
| AA                                                   | REFERENCE LOCATION FOR MEASUREMENT OF CHEST CIRCUMFERENCE | Reference                                               | 332.7-358.1             | 350.1              |
| BB                                                   | REFERENCE LOCATION FOR MEASUREMENT OF WAIST CIRCUMFERENCE | Reference                                               | 160.1-170.2             | 170.0              |







Head Drop Test  
Hybrid III 5th Percentile Female  
ATD Serial No: 142

Test Date: 08/05/2025  
Test ID: D252251  
Test Technician: Jonah Pulokas

| Tested Parameter             | Units | Specification      | Result | Pass/Fail |
|------------------------------|-------|--------------------|--------|-----------|
| Laboratory Temperature       | °C    | 18.9 to 25.6       | 21.1   | Pass      |
| Laboratory Relative Humidity | %     | 10 to 70           | 43     | Pass      |
| Peak Resultant Acceleration  | g     | 250 to 300         | 259    | Pass      |
| Peak Lateral Acceleration    | g     | -15.0 to 15.0      | 8.3    | Pass      |
| Unimodal                     | %     | within 10% of peak | 2      | Pass      |

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------|--------------|---------------|------------------|----------------------|
| HEAD X  | Endevco      | T30974        | 05/27/2025       | 11/26/2025           |
| HEAD Y  | Endevco      | T30975        | 05/27/2025       | 11/26/2025           |
| HEAD Z  | Endevco      | T30976        | 05/27/2025       | 11/26/2025           |

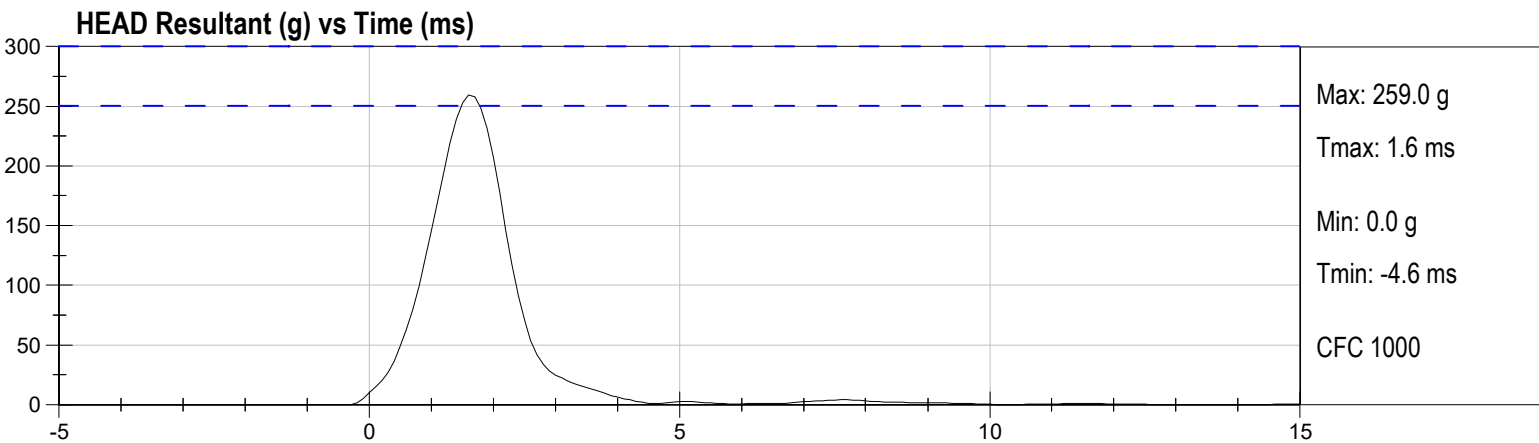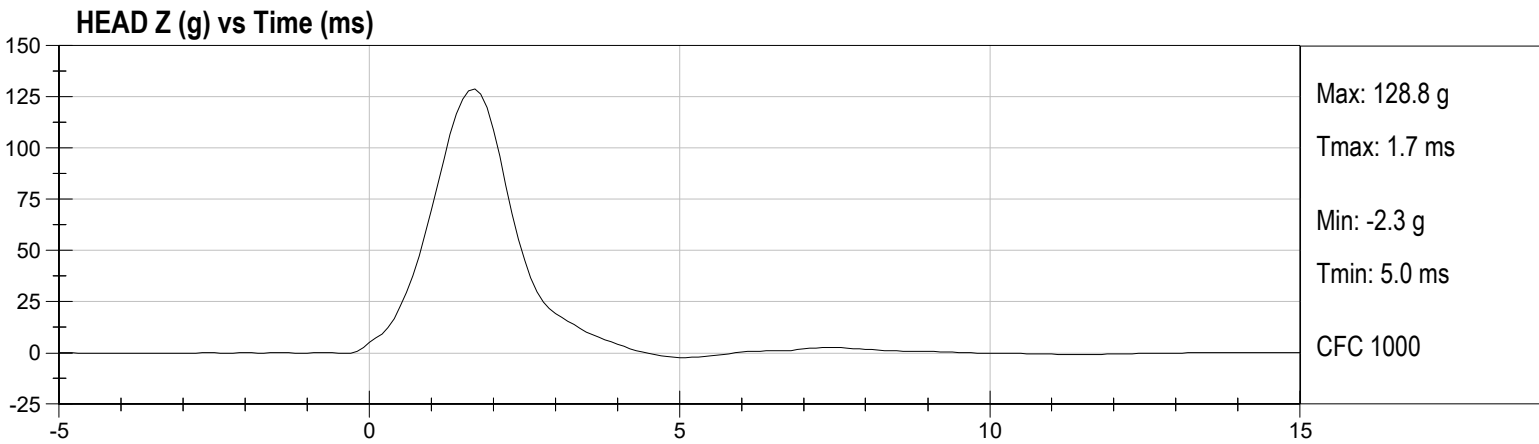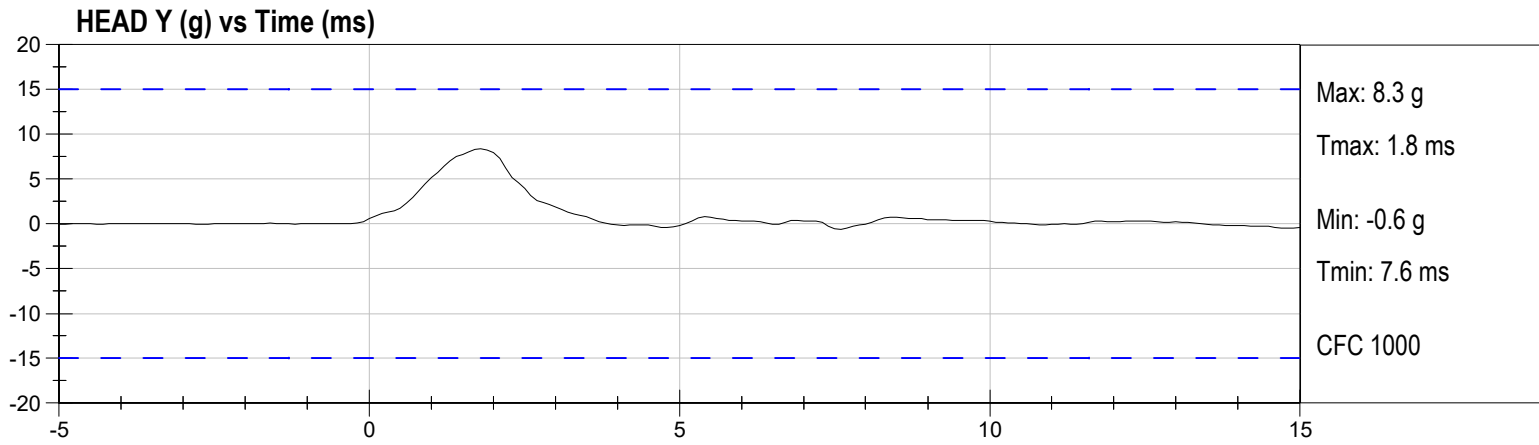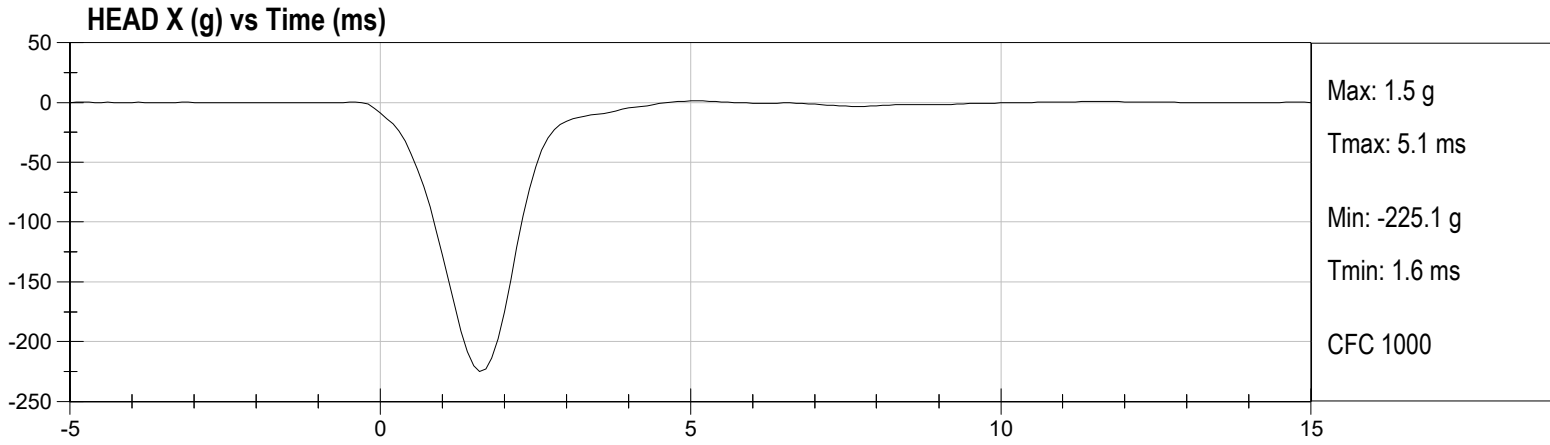





| Tested Parameter                                  | Units | Specification | Result | Pass/Fail |
|---------------------------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature                            | °C    | 20.6 to 22.2  | 21.2   | Pass      |
| Laboratory Relative Humidity                      | %     | 10 to 70      | 46     | Pass      |
| Pendulum Velocity                                 | m/s   | 6.89 to 7.13  | 6.96   | Pass      |
| Pendulum Velocity At 10 ms After T0               | m/s   | 2.1 to 2.5    | 2.24   | Pass      |
| Pendulum Velocity At 20 ms After T0               | m/s   | 4.0 to 5.0    | 4.46   | Pass      |
| Pendulum Velocity At 30 ms After T0               | m/s   | 5.8 to 7.0    | 6.49   | Pass      |
| Maximum "D" Plane Rotation                        | Deg   | 77 to 91      | 80     | Pass      |
| Occipital Condyle Moment within Rotation Corridor | Nm    | 69 to 83      | 78     | Pass      |
| Positive Moment Time Curve Decay to 10 Nm         | ms    | 80 to 100     | 86     | Pass      |

| Channel       | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------------|--------------|---------------|------------------|----------------------|
| PEND. ACCEL.  | Endevco      | AH5P1         | 07/09/2025       | 1/8/2026             |
| NECK FORCE X  | Denton       | NG2256FX      | 07/14/2025       | 7/14/2026            |
| NECK MOMENT Y | Denton       | NG2256MY      | 07/14/2025       | 7/14/2026            |
| PEND. POT     | Servo        | 4707          | 02/25/2025       | 8/27/2025            |
| HEAD POT      | Servo        | 7297          | 02/25/2025       | 8/27/2025            |


PEND. ACCEL. Velocity (m/s) vs Time (ms)

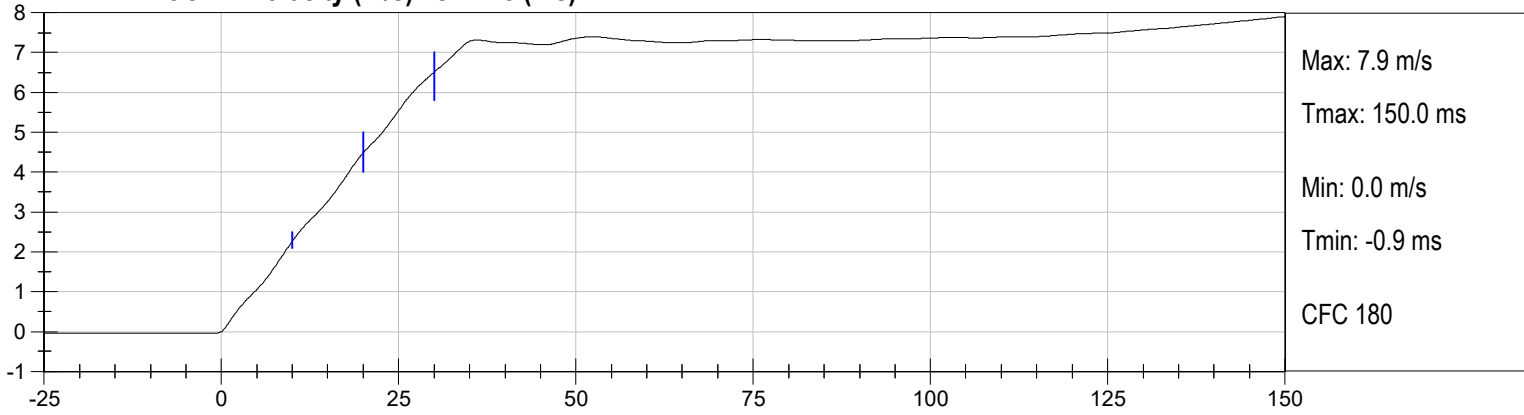

NECK ROTATION (deg) vs Time (ms)

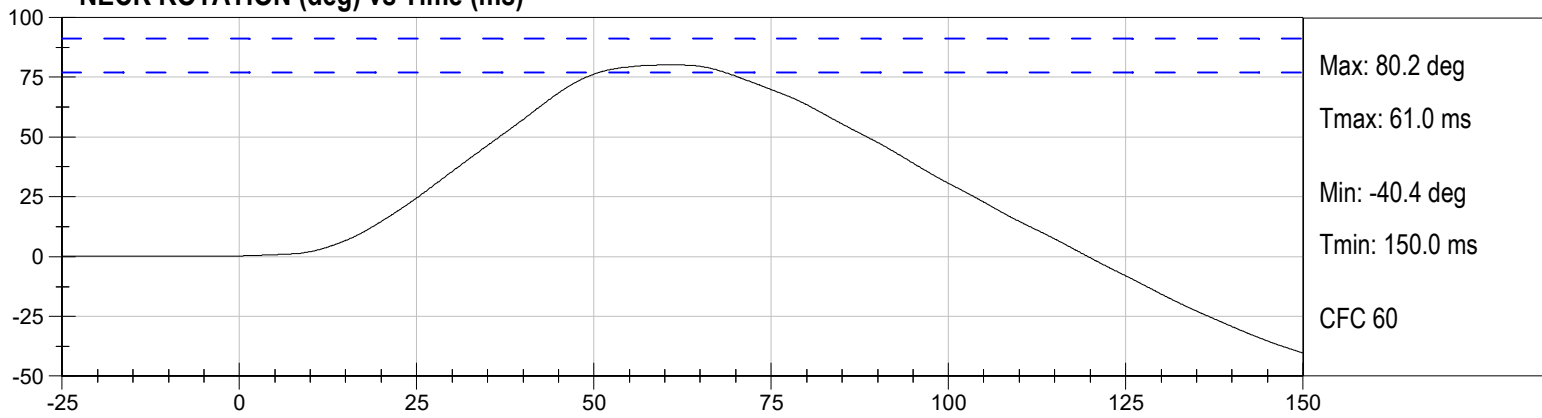


OCCIPITAL MOMENT (Nm) vs Time (ms)

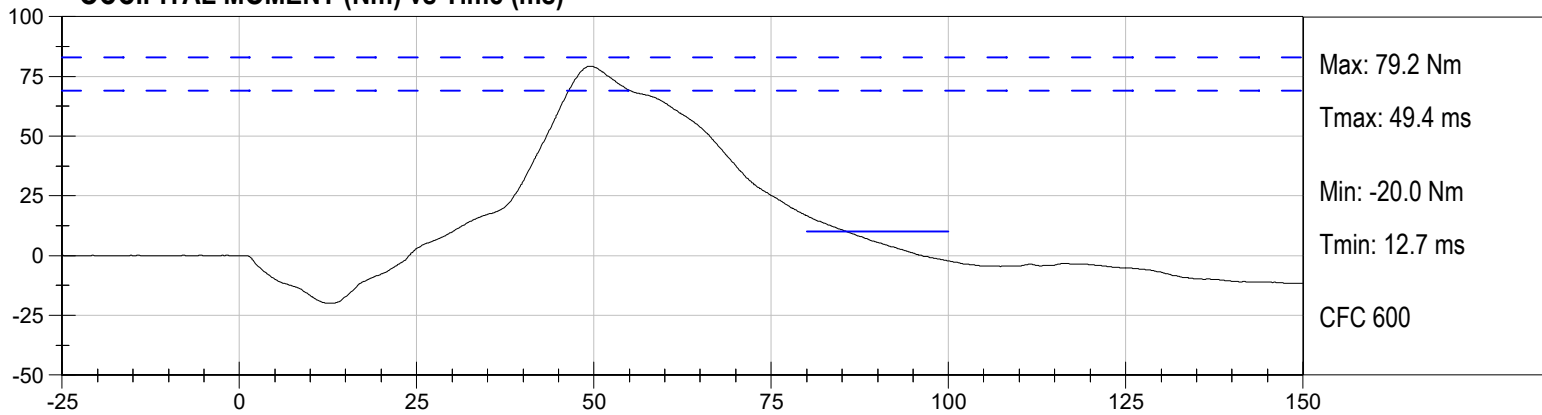


| Tested Parameter                                  | Units | Specification | Result | Pass/Fail |
|---------------------------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature                            | °C    | 20.6 to 22.2  | 21.2   | Pass      |
| Laboratory Relative Humidity                      | %     | 10 to 70      | 45     | Pass      |
| Pendulum Velocity                                 | m/s   | 5.95 to 6.19  | 6.05   | Pass      |
| Pendulum Velocity At 10 ms After T0               | m/s   | 1.5 to 1.9    | 1.88   | Pass      |
| Pendulum Velocity At 20 ms After T0               | m/s   | 3.1 to 3.9    | 3.81   | Pass      |
| Pendulum Velocity At 30 ms After T0               | m/s   | 4.6 to 5.6    | 5.55   | Pass      |
| Maximum "D" Plane Rotation                        | Deg   | 99 to 114     | 110.3  | Pass      |
| Occipital Condyle Moment within Rotation Corridor | Nm    | -53 to -65    | -58    | Pass      |
| Negative Moment Time Curve Decay to -10 Nm        | ms    | 94 to 114     | 104    | Pass      |

| Channel       | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------------|--------------|---------------|------------------|----------------------|
| PEND. ACCEL.  | Endevco      | AH5P1         | 07/09/2025       | 1/8/2026             |
| NECK FORCE X  | Denton       | NG2256FX      | 07/14/2025       | 7/14/2026            |
| NECK MOMENT Y | Denton       | NG2256MY      | 07/14/2025       | 7/14/2026            |
| PEND. POT     | Servo        | 4707          | 02/25/2025       | 8/27/2025            |
| HEAD POT      | Servo        | 7297          | 02/25/2025       | 8/27/2025            |


PEND. ACCEL. Velocity (m/s) vs Time (ms)

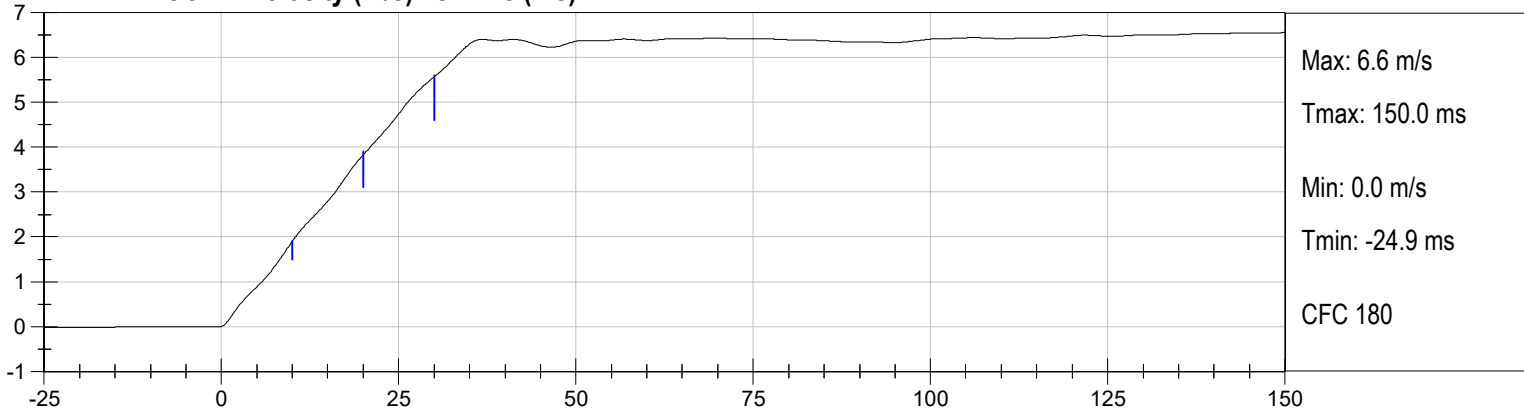

NECK ROTATION (deg) vs Time (ms)

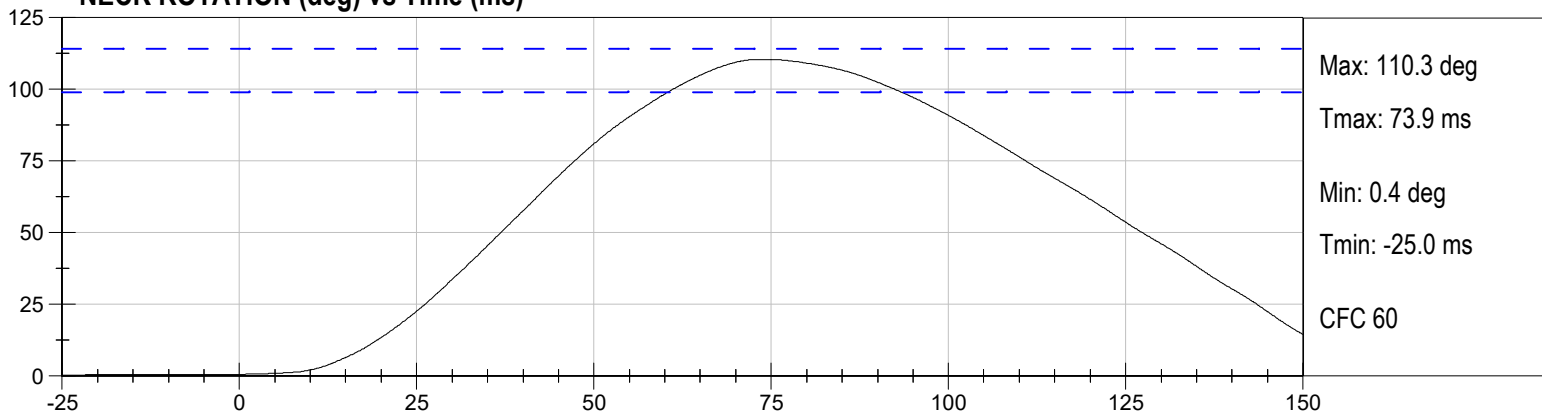

OCCIPITAL MOMENT (Nm) vs Time (ms)

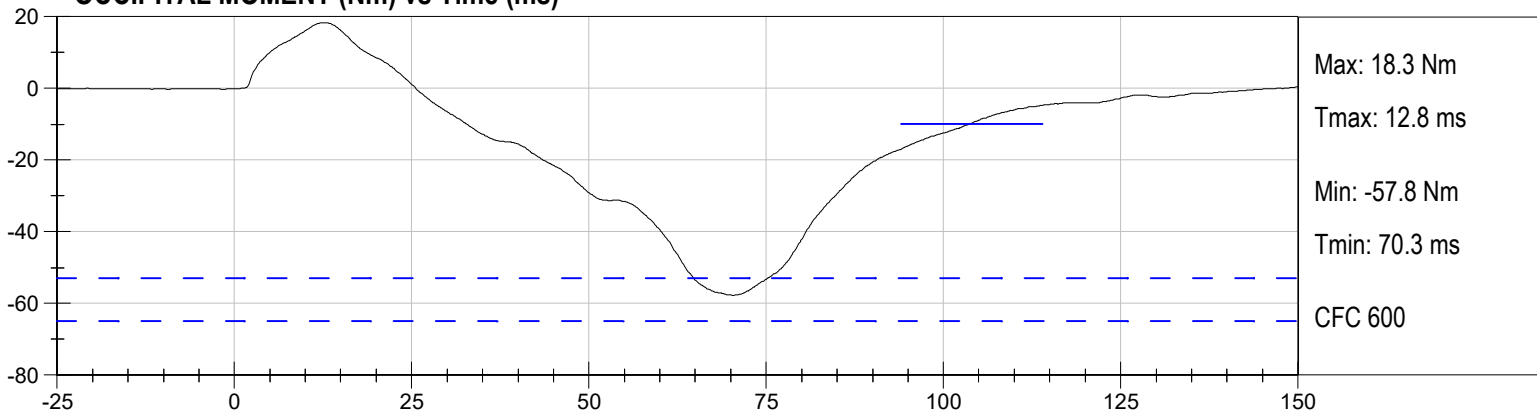






Thorax Impact Test  
Hybrid III 5th Percentile Female  
ATD Serial No: 142

Test Date: 08/05/2025  
Test ID: D252254  
Test Technician: Jonah Pulokas


| Tested Parameter                   | Units | Specification | Result | Pass/Fail |
|------------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature             | °C    | 20.6 to 22.2  | 21.2   | Pass      |
| Laboratory Relative Humidity       | %     | 10 to 70      | 44     | Pass      |
| Probe Velocity                     | m/s   | 6.59 to 6.83  | 6.77   | Pass      |
| Peak Deflection                    | mm    | 50 to 58      | 53     | Pass      |
| Peak Resistive Force w/in Corridor | N     | 3900 to 4400  | 4272   | Pass      |
| Internal Hysteresis                | %     | 69 to 85      | 74     | Pass      |
| Peak Force 18 mm - 50 mm           | N     | 0 to 4600     | 4276   | Pass      |

| Channel            | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|--------------------|--------------|---------------|------------------|----------------------|
| PROBE              | Endevco      | P79577        | 03/21/2025       | 9/20/2025            |
| CHEST DISPLACEMENT | Humanetics   | 142           | 04/29/2025       | 10/29/2025           |


**FORCE (N) vs CHEST DISPLACEMENT (mm)**

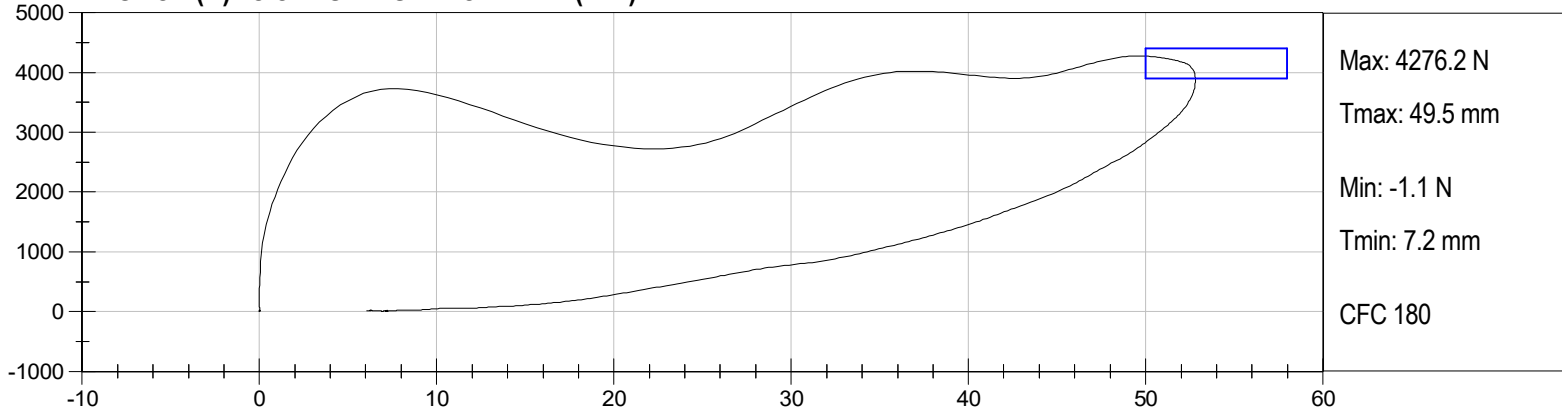

**FORCE (N) vs Time (ms)**

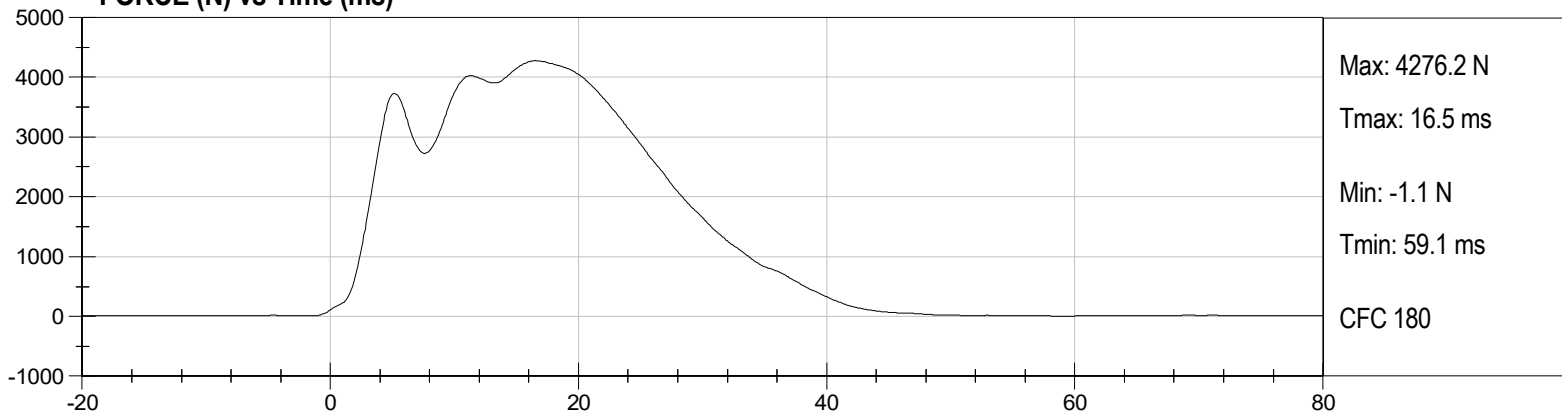

**CHEST DISPLACEMENT (mm) vs Time (ms)**

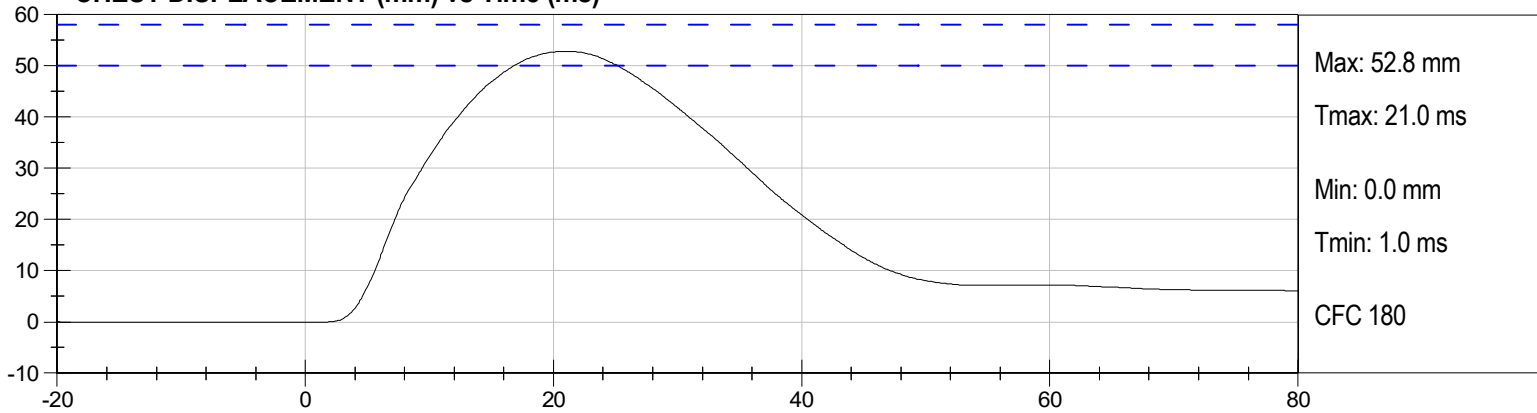




Right Knee Impact Test  
Hybrid III 5th Percentile Female  
ATD Serial No: 142

Test Date: 08/05/2025  
Test ID: D252255  
Test Technician: Jonah Pulokas

| Tested Parameter             | Units | Specification | Result | Pass/Fail |
|------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature       | °C    | 18.9 to 25.6  | 21.1   | Pass      |
| Laboratory Relative Humidity | %     | 10 to 70      | 47     | Pass      |
| Probe Velocity               | m/s   | 2.07 to 2.13  | 2.12   | Pass      |
| Peak Probe Force             | N     | 3450 to 4060  | 3938   | Pass      |

| Channel    | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|------------|--------------|---------------|------------------|----------------------|
| KNEE PROBE | Endevco      | P82128        | 05/30/2025       | 11/29/2025           |

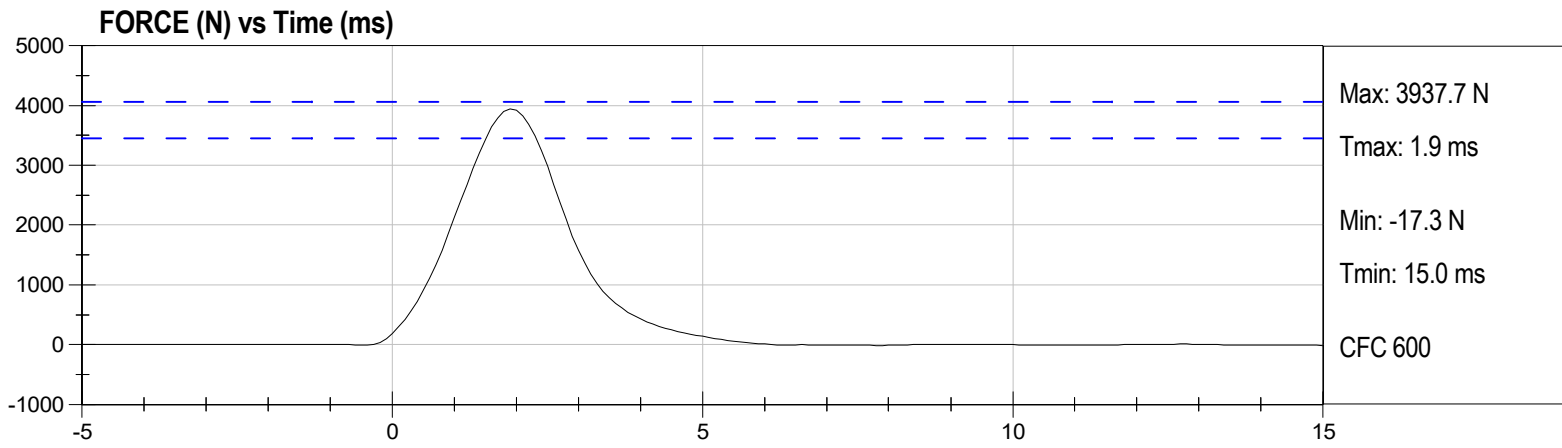






Left Knee Impact Test  
Hybrid III 5th Percentile Female  
ATD Serial No: 142

Test Date: 08/05/2025  
Test ID: D252256  
Test Technician: Jonah Pulokas

| Tested Parameter             | Units | Specification | Result | Pass/Fail |
|------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature       | °C    | 18.9 to 25.6  | 21.2   | Pass      |
| Laboratory Relative Humidity | %     | 10 to 70      | 46     | Pass      |
| Probe Velocity               | m/s   | 2.07 to 2.13  | 2.11   | Pass      |
| Peak Probe Force             | N     | 3450 to 4060  | 4016   | Pass      |

| Channel    | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|------------|--------------|---------------|------------------|----------------------|
| KNEE PROBE | Endevco      | P82128        | 05/30/2025       | 11/29/2025           |

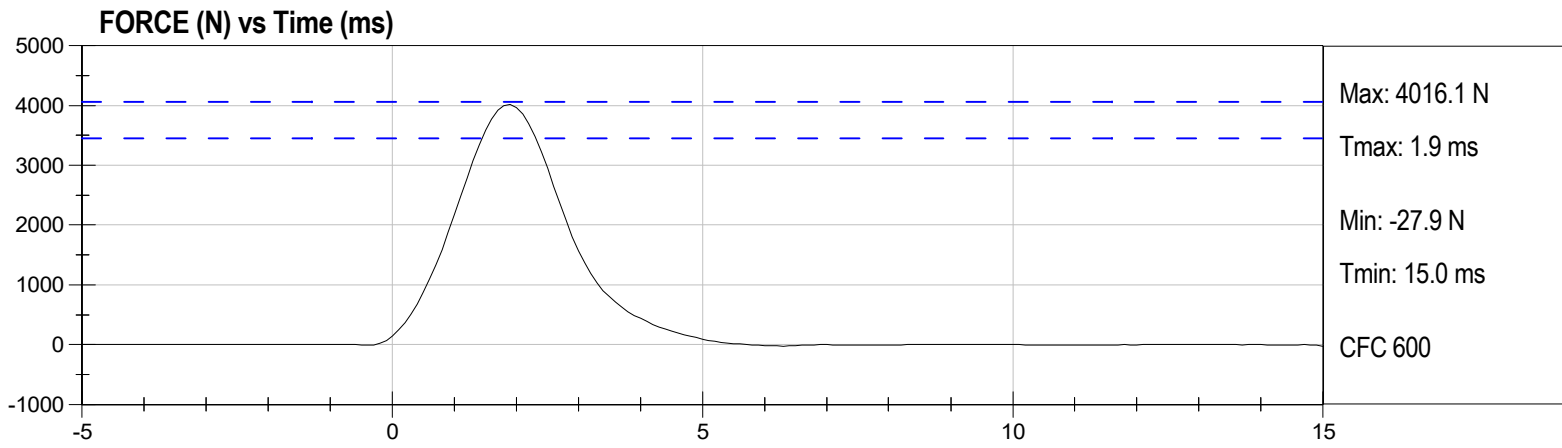





**Torso Flexion Test**  
**Hybrid III 5th Percentile Female**  
**ATD Serial No: 142**

Test Date: 08/05/2025  
Test ID: D252257  
Test Technician: Jonah Pulokas

| Tested Parameter                 | Units | Specification | Result | Pass/Fail |
|----------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature           | °C    | 18.9 to 25.6  | 21.0   | Pass      |
| Laboratory Relative Humidity     | %     | 10 to 70      | 43     | Pass      |
| Initial Angle                    | deg   | 0 to 20       | 18     | Pass      |
| Return Angle Relative to Initial | deg   | -8 to 8       | 4      | Pass      |
| Force at 45 deg                  | N     | 320 to 390    | 369    | Pass      |
| Upper Torso Deflection Rate      | deg/s | 0.5 to 1.5    | 0.9    | Pass      |

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------|--------------|---------------|------------------|----------------------|
| LOAD    | Interface    | 479661        | 08/04/2025       | 2/3/2026             |
| ANGLE   | Seika        | 494819        | 06/20/2025       | 6/20/2026            |

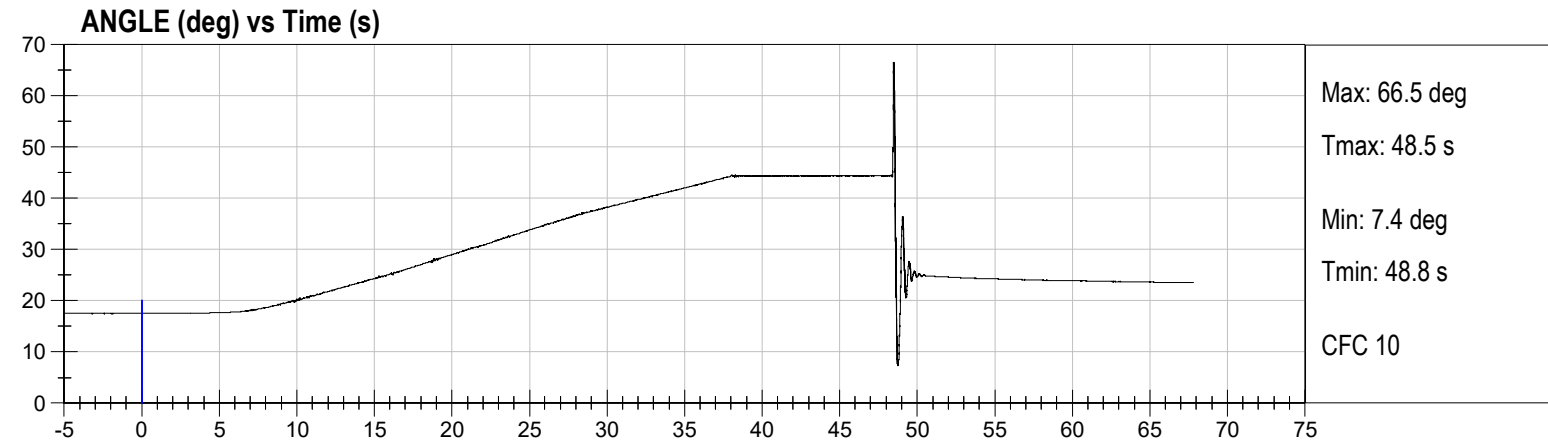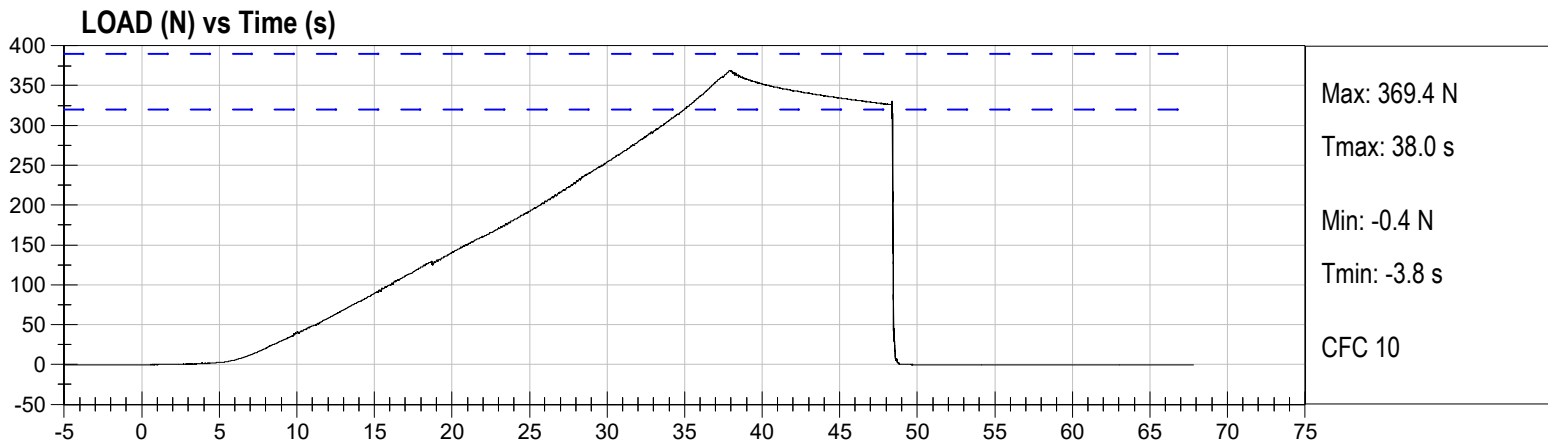



## **QUALIFICATION TEST RESULTS**

### **POST-TEST**

**HYBRID III 5<sup>TH</sup> PERCENTILE FEMALE - PASSENGER ATD**







Head Drop Test  
Hybrid III 5th Percentile Female  
ATD Serial No: 142

Test Date: 09/05/2025  
Test ID: D252561  
Test Technician: Jonah Pulokas

| Tested Parameter             | Units | Specification      | Result | Pass/Fail |
|------------------------------|-------|--------------------|--------|-----------|
| Laboratory Temperature       | °C    | 18.9 to 25.6       | 21.3   | Pass      |
| Laboratory Relative Humidity | %     | 10 to 70           | 39     | Pass      |
| Peak Resultant Acceleration  | g     | 250 to 300         | 283    | Pass      |
| Peak Lateral Acceleration    | g     | -15.0 to 15.0      | 3.4    | Pass      |
| Unimodal                     | %     | within 10% of peak | 2      | Pass      |

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------|--------------|---------------|------------------|----------------------|
| HEAD X  | Endevco      | T30974        | 05/27/2025       | 11/26/2025           |
| HEAD Y  | Endevco      | T30975        | 05/27/2025       | 11/26/2025           |
| HEAD Z  | Endevco      | T30976        | 05/27/2025       | 11/26/2025           |

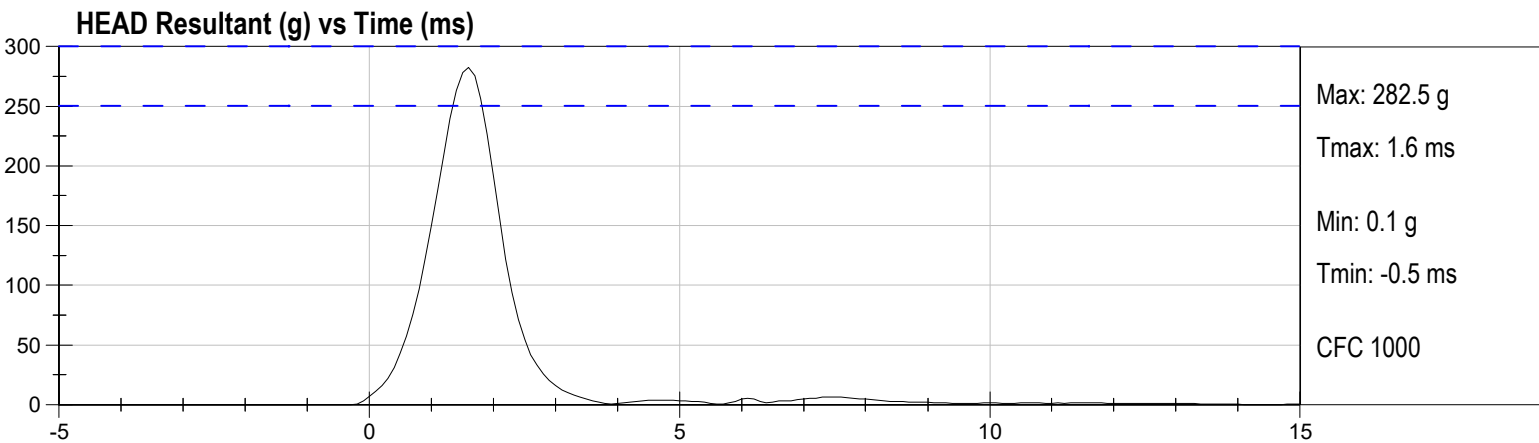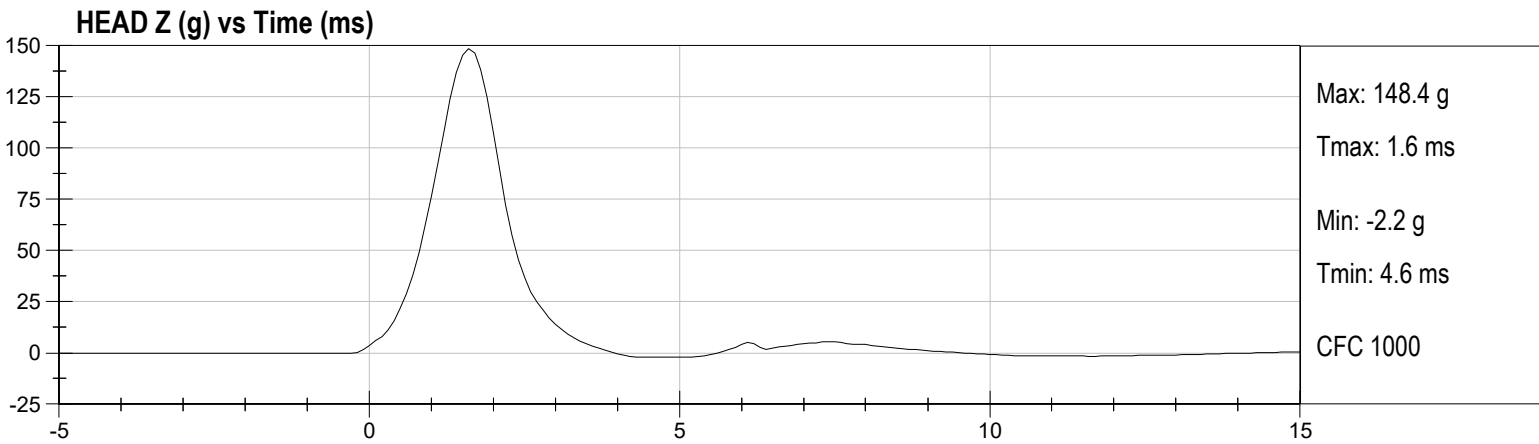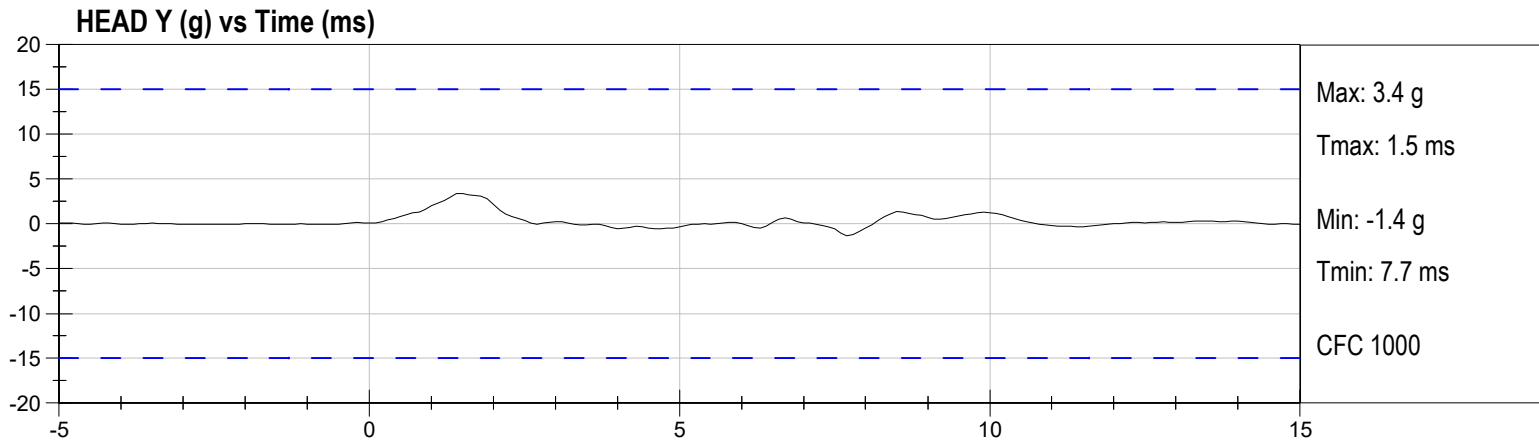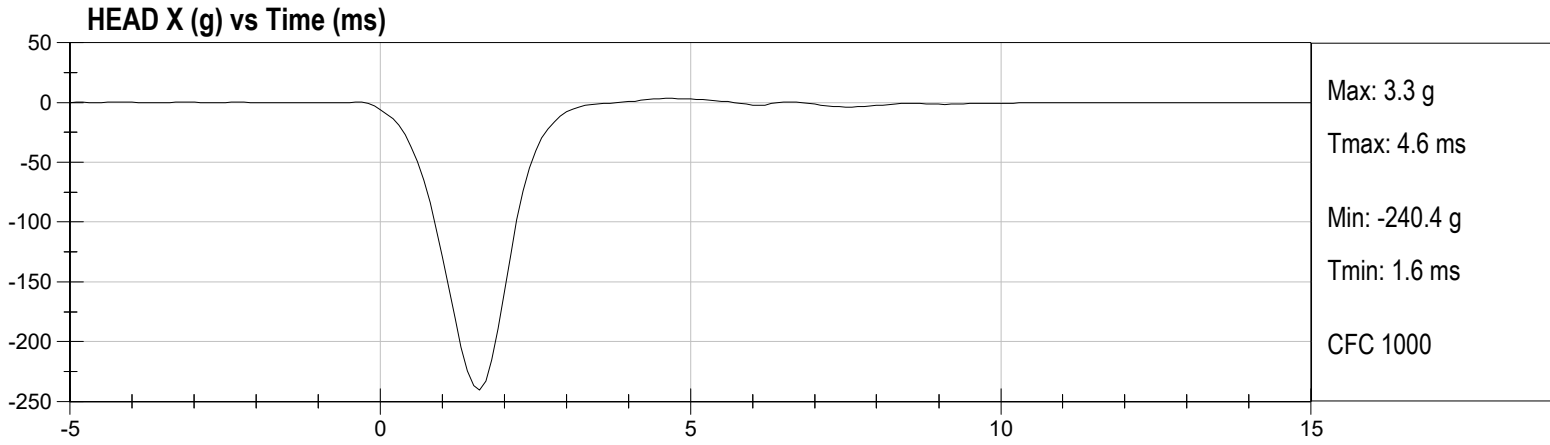


| Tested Parameter                                  | Units | Specification | Result | Pass/Fail |
|---------------------------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature                            | °C    | 20.6 to 22.2  | 21.1   | Pass      |
| Laboratory Relative Humidity                      | %     | 10 to 70      | 39     | Pass      |
| Pendulum Velocity                                 | m/s   | 6.89 to 7.13  | 6.96   | Pass      |
| Pendulum Velocity At 10 ms After T0               | m/s   | 2.1 to 2.5    | 2.23   | Pass      |
| Pendulum Velocity At 20 ms After T0               | m/s   | 4.0 to 5.0    | 4.41   | Pass      |
| Pendulum Velocity At 30 ms After T0               | m/s   | 5.8 to 7.0    | 6.47   | Pass      |
| Maximum "D" Plane Rotation                        | Deg   | 77 to 91      | 79     | Pass      |
| Occipital Condyle Moment within Rotation Corridor | Nm    | 69 to 83      | 71     | Pass      |
| Positive Moment Time Curve Decay to 10 Nm         | ms    | 80 to 100     | 87     | Pass      |


| Channel       | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------------|--------------|---------------|------------------|----------------------|
| PEND. ACCEL.  | Endevco      | AH5P1         | 07/09/2025       | 1/8/2026             |
| NECK FORCE X  | Denton       | NG2256FX      | 07/14/2025       | 7/14/2026            |
| NECK MOMENT Y | Denton       | NG2256MY      | 07/14/2025       | 7/14/2026            |
| PEND. POT     | Servo        | 4707          | 08/13/2025       | 2/12/2026            |
| HEAD POT      | Servo        | 7297          | 08/13/2025       | 2/12/2026            |




PEND. ACCEL. Velocity (m/s) vs Time (ms)

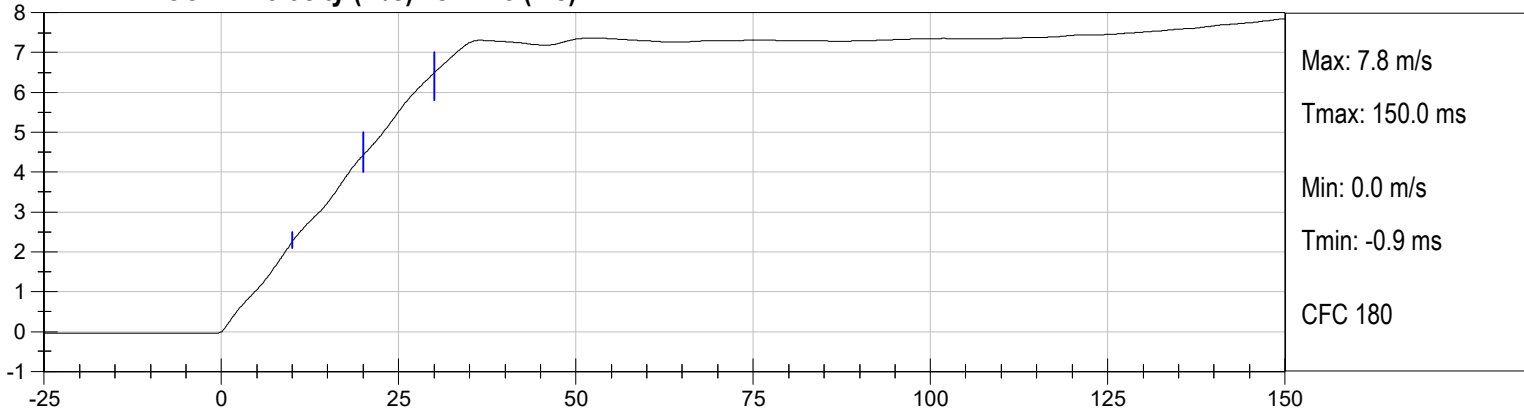

NECK ROTATION (deg) vs Time (ms)

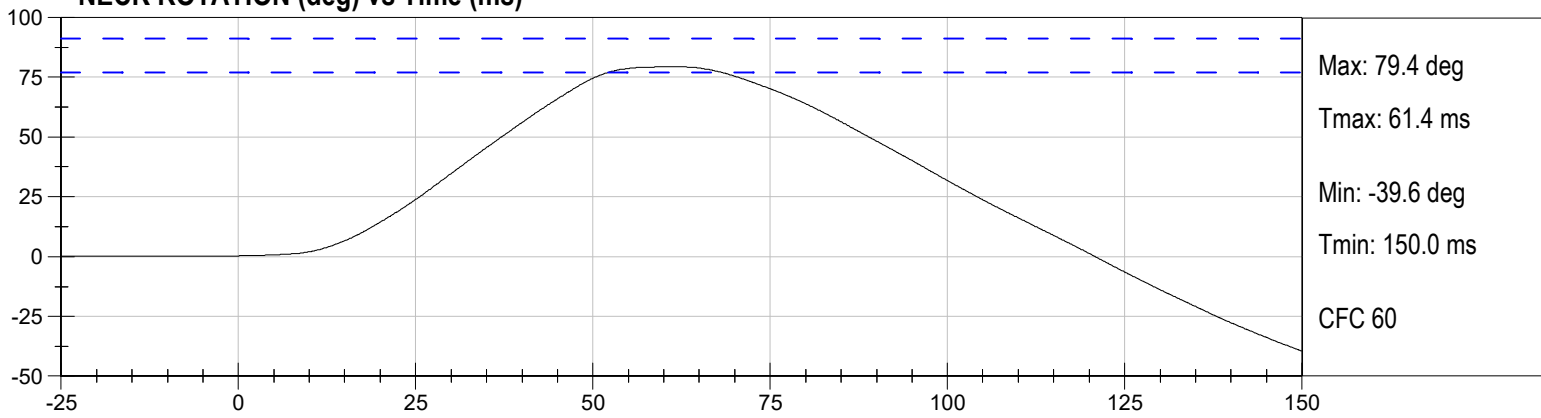


OCCIPITAL MOMENT (Nm) vs Time (ms)

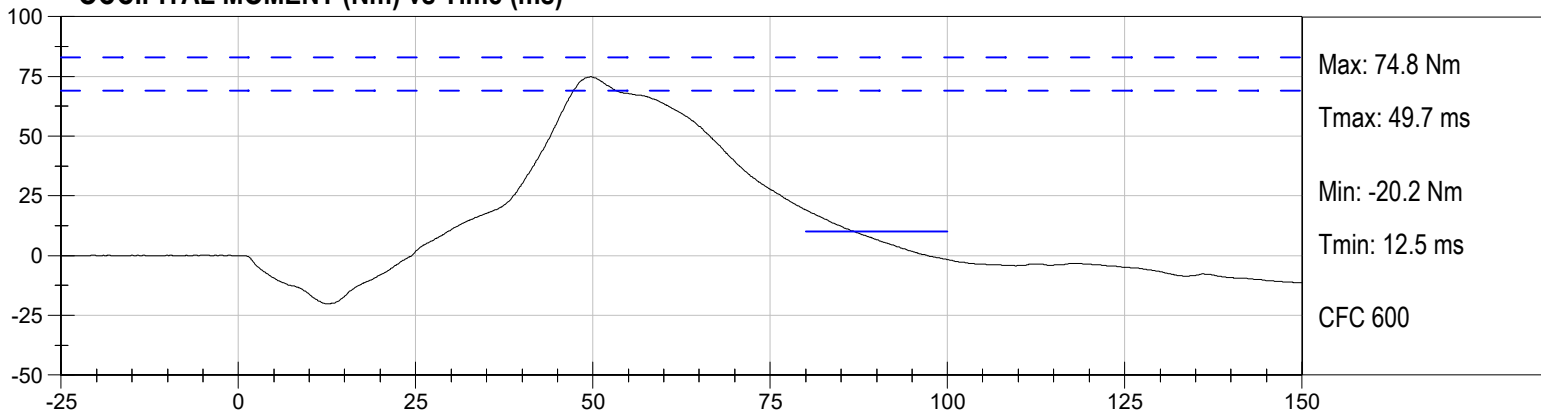


| Tested Parameter                                  | Units | Specification | Result | Pass/Fail |
|---------------------------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature                            | °C    | 20.6 to 22.2  | 21.1   | Pass      |
| Laboratory Relative Humidity                      | %     | 10 to 70      | 39     | Pass      |
| Pendulum Velocity                                 | m/s   | 5.95 to 6.19  | 6.12   | Pass      |
| Pendulum Velocity At 10 ms After T0               | m/s   | 1.5 to 1.9    | 1.78   | Pass      |
| Pendulum Velocity At 20 ms After T0               | m/s   | 3.1 to 3.9    | 3.60   | Pass      |
| Pendulum Velocity At 30 ms After T0               | m/s   | 4.6 to 5.6    | 5.23   | Pass      |
| Maximum "D" Plane Rotation                        | Deg   | 99 to 114     | 109.5  | Pass      |
| Occipital Condyle Moment within Rotation Corridor | Nm    | -53 to -65    | -56    | Pass      |
| Negative Moment Time Curve Decay to -10 Nm        | ms    | 94 to 114     | 106    | Pass      |

| Channel       | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------------|--------------|---------------|------------------|----------------------|
| PEND. ACCEL.  | Endevco      | AH5P1         | 07/09/2025       | 1/8/2026             |
| NECK FORCE X  | Denton       | NG2256FX      | 07/14/2025       | 7/14/2026            |
| NECK MOMENT Y | Denton       | NG2256MY      | 07/14/2025       | 7/14/2026            |
| PEND. POT     | Servo        | 4707          | 08/13/2025       | 2/12/2026            |
| HEAD POT      | Servo        | 7297          | 08/13/2025       | 2/12/2026            |


PEND. ACCEL. Velocity (m/s) vs Time (ms)

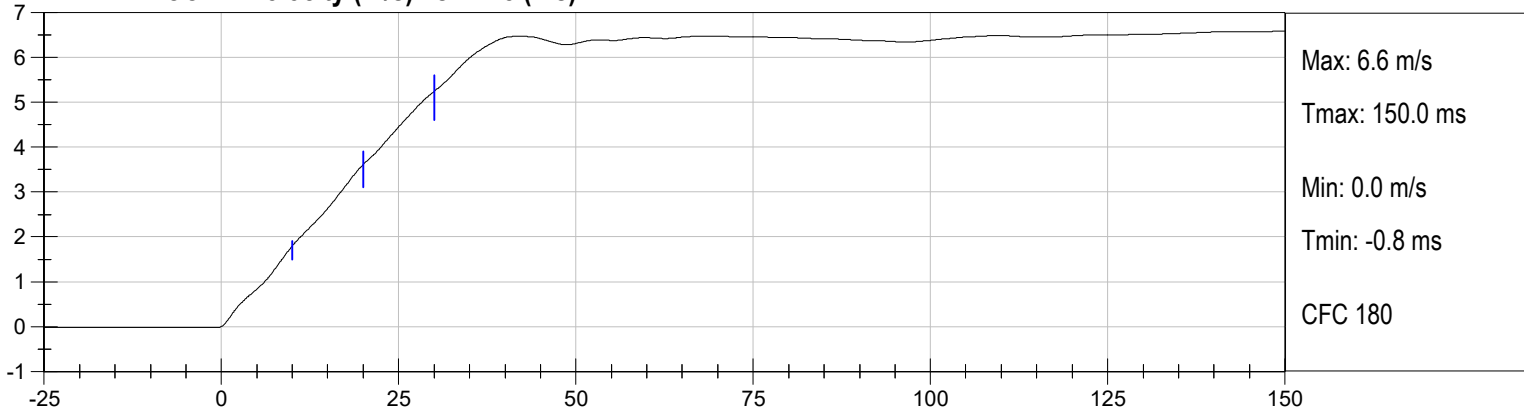

NECK ROTATION (deg) vs Time (ms)

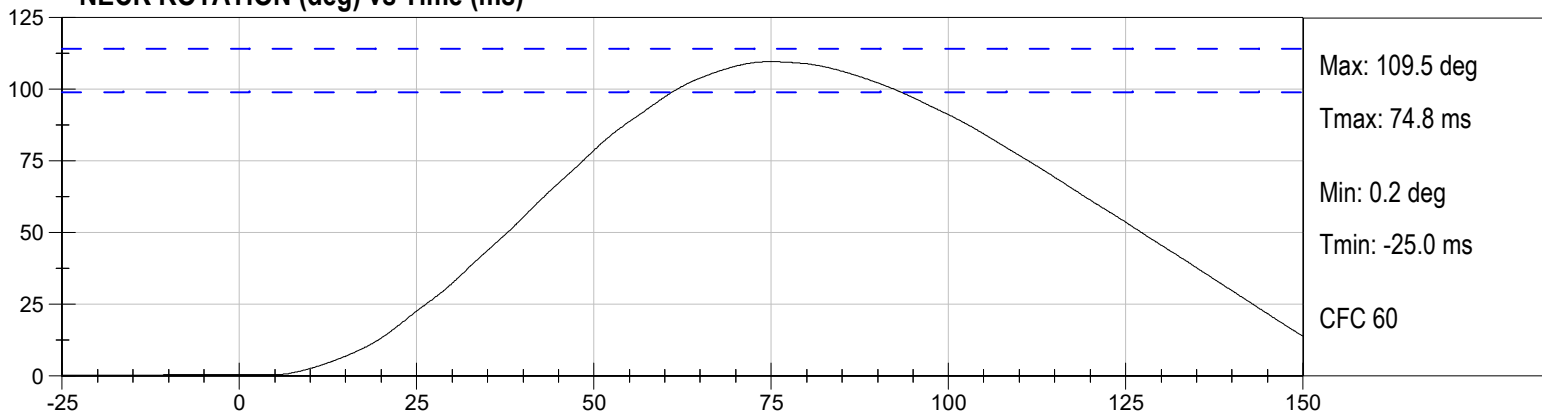

OCCIPITAL MOMENT (Nm) vs Time (ms)

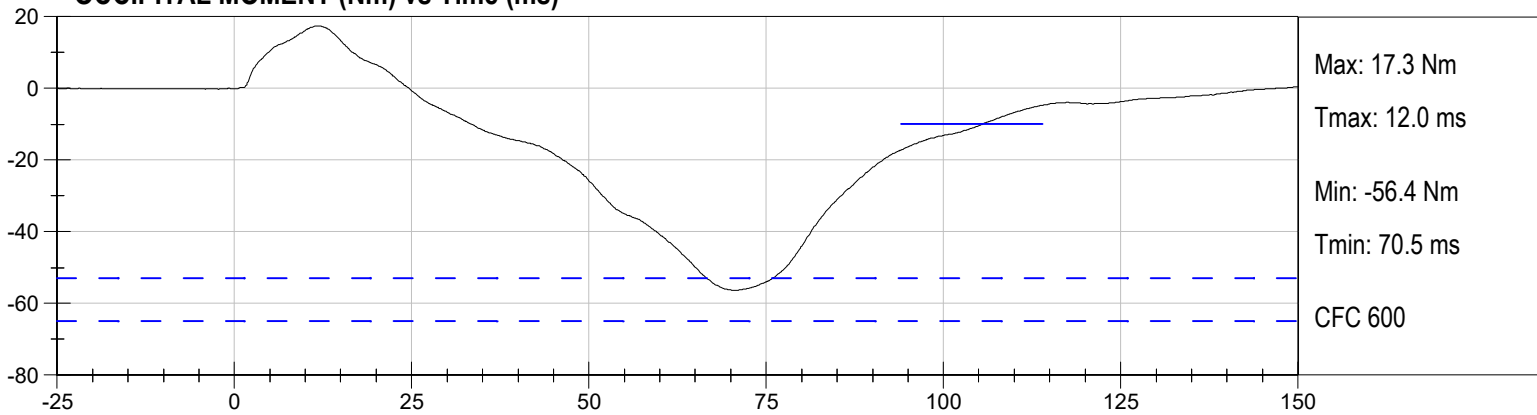




Thorax Impact Test  
Hybrid III 5th Percentile Female  
ATD Serial No: 142

Test Date: 09/05/2025  
Test ID: D252564  
Test Technician: Jonah Pulokas


| Tested Parameter                   | Units | Specification | Result | Pass/Fail |
|------------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature             | °C    | 20.6 to 22.2  | 21.1   | Pass      |
| Laboratory Relative Humidity       | %     | 10 to 70      | 39     | Pass      |
| Probe Velocity                     | m/s   | 6.59 to 6.83  | 6.77   | Pass      |
| Peak Deflection                    | mm    | 50 to 58      | 52     | Pass      |
| Peak Resistive Force w/in Corridor | N     | 3900 to 4400  | 4205   | Pass      |
| Internal Hysteresis                | %     | 69 to 85      | 74     | Pass      |
| Peak Force 18 mm - 50 mm           | N     | 0 to 4600     | 4203   | Pass      |

| Channel            | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|--------------------|--------------|---------------|------------------|----------------------|
| PROBE              | Endevco      | P79577        | 03/21/2025       | 9/20/2025            |
| CHEST DISPLACEMENT | Humanetics   | 142           | 04/29/2025       | 10/29/2025           |


**FORCE (N) vs CHEST DISPLACEMENT (mm)**

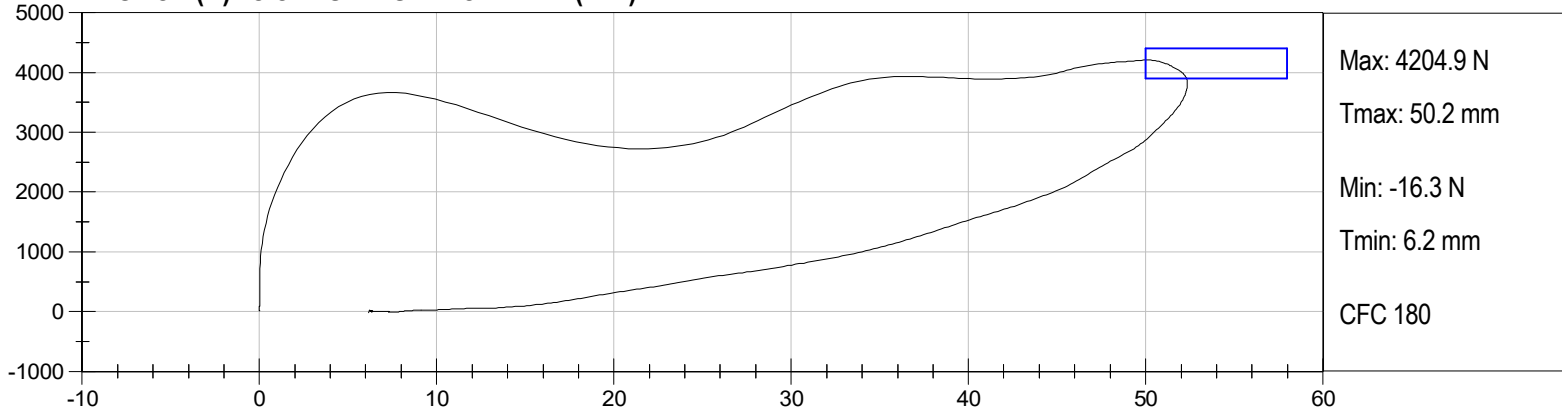

**FORCE (N) vs Time (ms)**

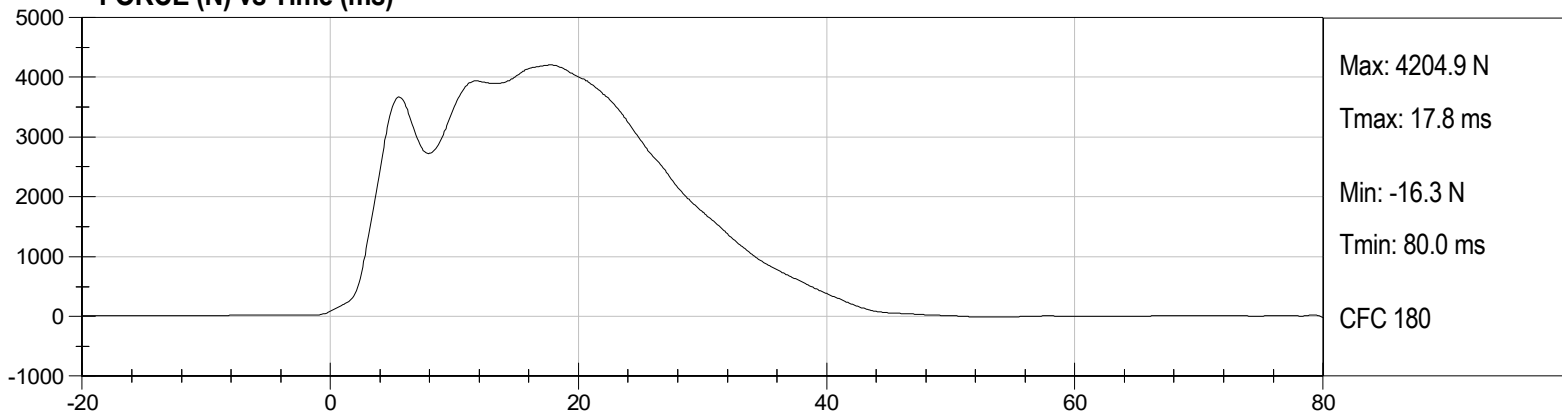

**CHEST DISPLACEMENT (mm) vs Time (ms)**

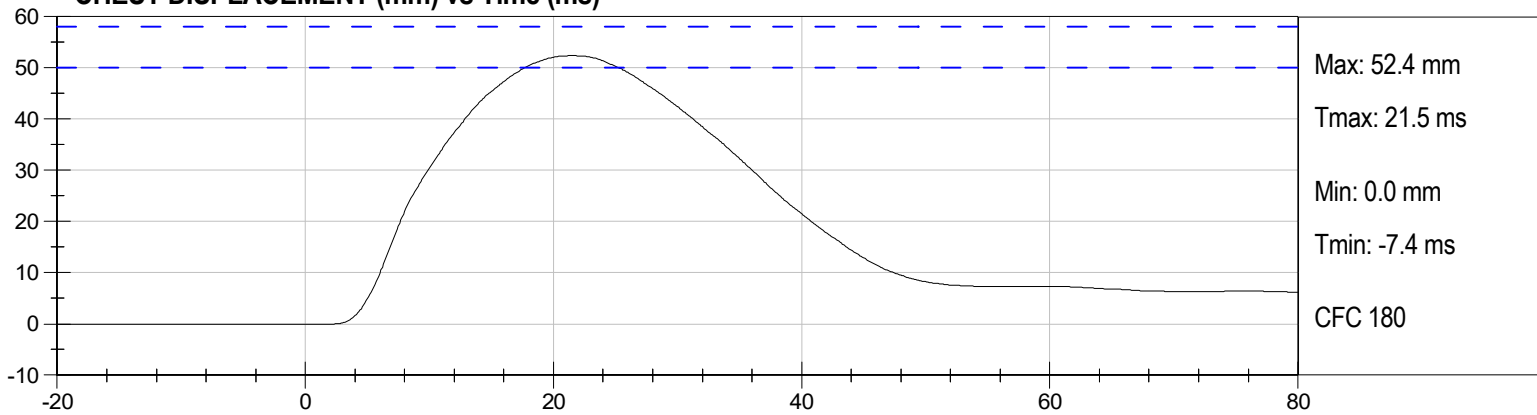






Right Knee Impact Test  
Hybrid III 5th Percentile Female  
ATD Serial No: 142

Test Date: 09/05/2025  
Test ID: D252565  
Test Technician: Jonah Pulokas

| Tested Parameter             | Units | Specification | Result | Pass/Fail |
|------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature       | °C    | 18.9 to 25.6  | 21.3   | Pass      |
| Laboratory Relative Humidity | %     | 10 to 70      | 39     | Pass      |
| Probe Velocity               | m/s   | 2.07 to 2.13  | 2.12   | Pass      |
| Peak Probe Force             | N     | 3450 to 4060  | 3621   | Pass      |

| Channel    | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|------------|--------------|---------------|------------------|----------------------|
| KNEE PROBE | Endevco      | P82128        | 05/30/2025       | 11/29/2025           |

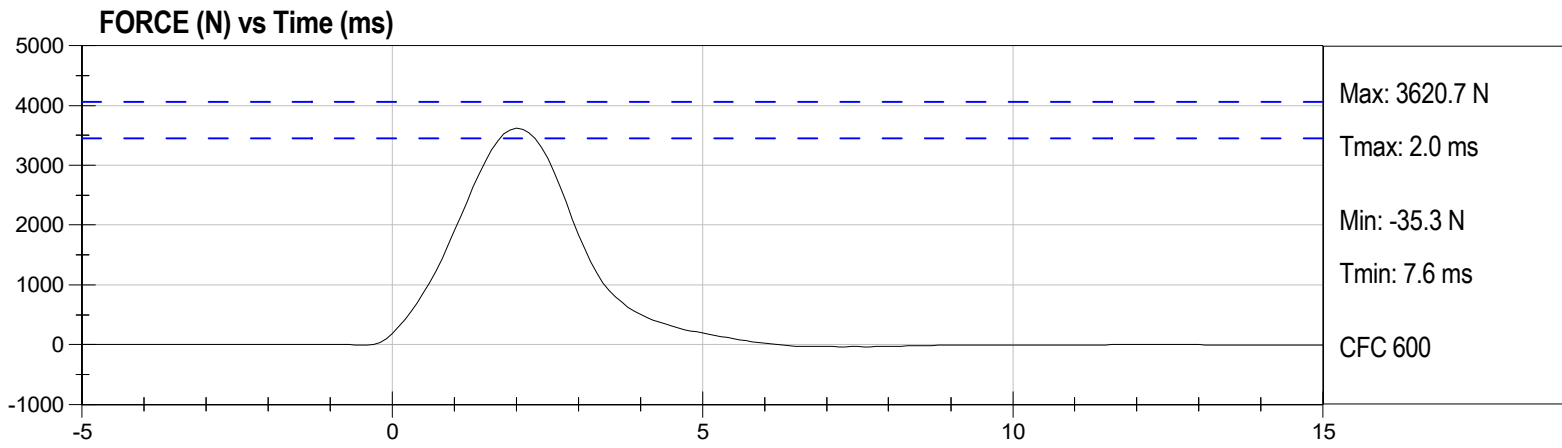




Left Knee Impact Test  
Hybrid III 5th Percentile Female  
ATD Serial No: 142

Test Date: 09/05/2025  
Test ID: D252566  
Test Technician: Jonah Pulokas

| Tested Parameter             | Units | Specification | Result | Pass/Fail |
|------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature       | °C    | 18.9 to 25.6  | 21.3   | Pass      |
| Laboratory Relative Humidity | %     | 10 to 70      | 39     | Pass      |
| Probe Velocity               | m/s   | 2.07 to 2.13  | 2.10   | Pass      |
| Peak Probe Force             | N     | 3450 to 4060  | 3659   | Pass      |

| Channel    | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|------------|--------------|---------------|------------------|----------------------|
| KNEE PROBE | Endevco      | P82128        | 05/30/2025       | 11/29/2025           |

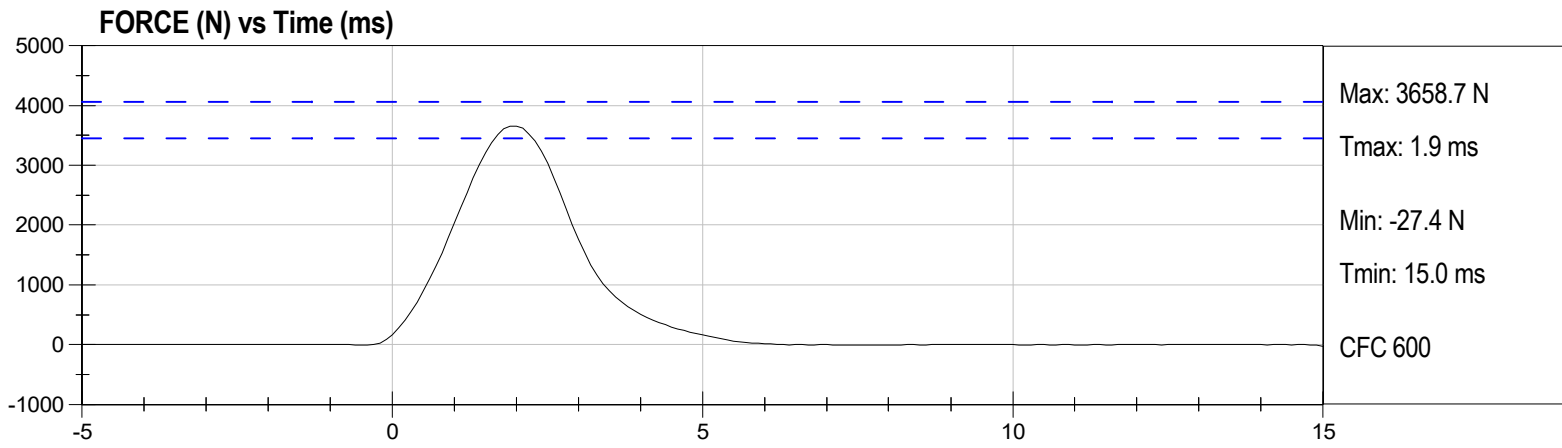





**Torso Flexion Test**  
**Hybrid III 5th Percentile Female**  
**ATD Serial No: 142**

Test Date: 09/05/2025  
Test ID: D252567  
Test Technician: Jonah Pulokas

| Tested Parameter                 | Units | Specification | Result | Pass/Fail |
|----------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature           | °C    | 18.9 to 25.6  | 21.3   | Pass      |
| Laboratory Relative Humidity     | %     | 10 to 70      | 38     | Pass      |
| Initial Angle                    | deg   | 0 to 20       | 19     | Pass      |
| Return Angle Relative to Initial | deg   | -8 to 8       | 4      | Pass      |
| Force at 45 deg                  | N     | 320 to 390    | 383    | Pass      |
| Upper Torso Deflection Rate      | deg/s | 0.5 to 1.5    | 0.9    | Pass      |

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------|--------------|---------------|------------------|----------------------|
| LOAD    | Interface    | 479661        | 08/04/2025       | 2/3/2026             |
| ANGLE   | Seika        | 494819        | 06/20/2025       | 6/20/2026            |



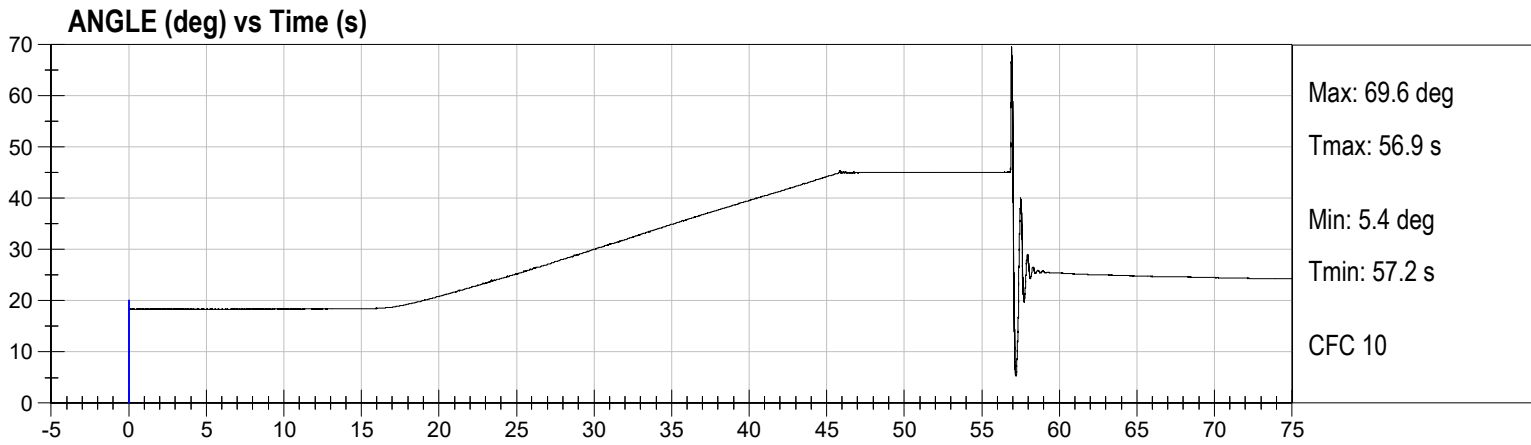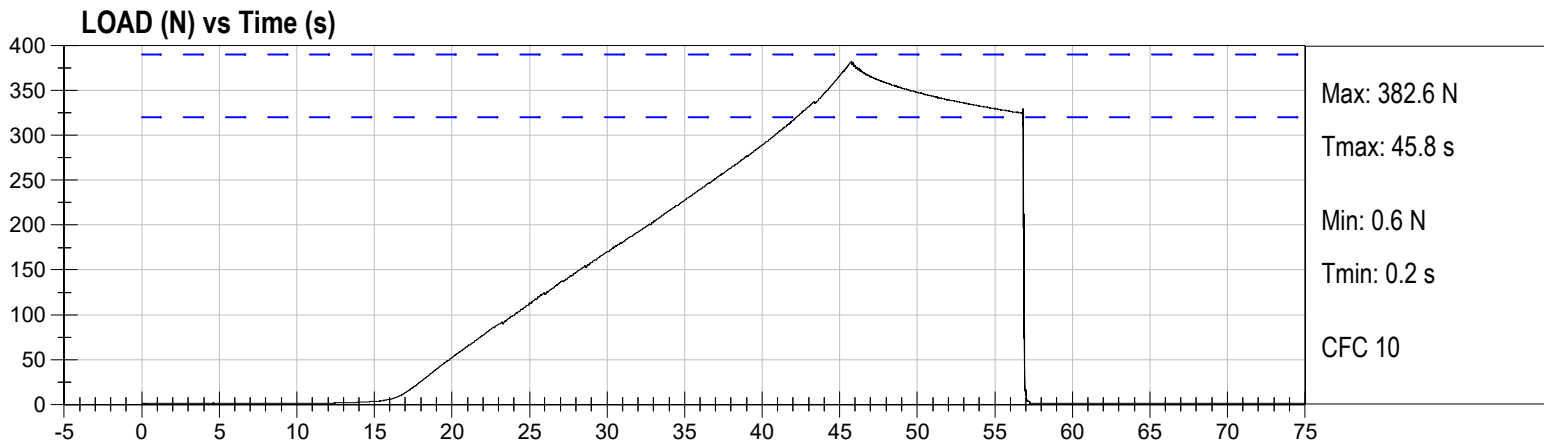

**APPENDIX D**  
**TEST EQUIPMENT AND INSTRUMENTATION CALIBRATION**

**TABLE 1 – DRIVER DUMMY INSTRUMENTATION**

| Instrument Location       |           |           | Axis                     | Hybrid III 50 <sup>th</sup> S/N 064 |              |                  |
|---------------------------|-----------|-----------|--------------------------|-------------------------------------|--------------|------------------|
|                           |           |           |                          | Serial Number                       | Manufacturer | Calibration Date |
| Head Accelerometers       | Primary   |           | X                        | T30960                              | Endevco      | 05/23/2025       |
|                           |           |           | Y                        | P79743                              | Endevco      | 05/23/2025       |
|                           |           |           | Z                        | P79741                              | Endevco      | 05/23/2025       |
|                           | Redundant |           | X                        | P79744                              | Endevco      | 05/23/2025       |
|                           |           |           | Y                        | P94834                              | Endevco      | 05/23/2025       |
|                           |           |           | Z                        | P94856                              | Endevco      | 05/23/2025       |
| Head Angular Rate Sensors |           |           | X                        | ARS7325                             | DTS          | 07/15/2025       |
|                           |           |           | Y                        | ARS7340                             | DTS          | 07/15/2025       |
|                           |           |           | Z                        | ARS7354                             | DTS          | 07/15/2025       |
| Upper Neck Load Cell      |           |           | Fx, Fy, Fz<br>Mx, My, Mz | NG2202                              | Denton       | 05/07/2025       |
| Chest Accelerometers      | Primary   |           | X                        | P86793                              | Endevco      | 05/23/2025       |
|                           |           |           | Y                        | P88348                              | Endevco      | 05/23/2025       |
|                           |           |           | Z                        | P86792                              | Endevco      | 05/23/2025       |
|                           | Redundant |           | X                        | P88667                              | Endevco      | 05/23/2025       |
|                           |           |           | Y                        | P94109                              | Endevco      | 05/23/2025       |
|                           |           |           | Z                        | P88666                              | Endevco      | 05/23/2025       |
| Chest Potentiometer       |           |           | X                        | 064                                 | Humanetics   | 05/21/2025       |
| Pelvis Accelerometers     |           |           | X                        | P97742                              | Endevco      | 05/23/2025       |
|                           |           |           | Y                        | P96038                              | Endevco      | 05/23/2025       |
|                           |           |           | Z                        | P95526                              | Endevco      | 05/23/2025       |
| Femur Load Cells          | Right     | Primary   | Z                        | FG121P                              | Denton       | 05/27/2025       |
|                           |           | Redundant | Z                        | FG121R                              | Denton       | 05/27/2025       |
|                           | Left      | Primary   | Z                        | FG122P                              | Denton       | 05/27/2025       |
|                           |           | Redundant | Z                        | FG122R                              | Denton       | 05/27/2025       |
| Tibia Load Cells          | Right     | Upper     | Mx, My, Fz               | TG405                               | Denton       | 11/12/2024       |
|                           |           | Lower     | Mx, My, Fz               | AG368                               | Denton       | 11/11/2024       |
|                           | Left      | Upper     | Mx, My, Fz               | TG475                               | Denton       | 11/12/2024       |
|                           |           | Lower     | Mx, My, Fz               | AG504                               | Denton       | 11/12/2024       |
| Foot Accelerometers       | Right     | Rear      | X                        | T22486                              | Endevco      | 05/23/2025       |
|                           |           |           | Z                        | P97382                              | Endevco      | 05/23/2025       |
|                           |           | Front     | Z                        | P82120                              | Endevco      | 05/23/2025       |
|                           | Left      | Rear      | X                        | T16468                              | Endevco      | 05/23/2025       |
|                           |           |           | Z                        | T32154                              | Endevco      | 05/23/2025       |
|                           |           | Front     | Z                        | T32190                              | Endevco      | 05/23/2025       |
| Seat Belt Load Cells      |           | Lap       |                          | SBG161                              | FTSS         | 10/21/2024       |
|                           |           | Shoulder  |                          | SBG157                              | FTSS         | 10/21/2024       |

**TABLE 2 – FRONT PASSENGER DUMMY INSTRUMENTATION**

| Instrument Location       |           |                          | Axis       | Hybrid III 5 <sup>th</sup> S/N 142 |              |                  |
|---------------------------|-----------|--------------------------|------------|------------------------------------|--------------|------------------|
|                           |           |                          |            | Serial Number                      | Manufacturer | Calibration Date |
| Head Accelerometers       | Primary   |                          | X          | P94799                             | Endevco      | 04/29/2025       |
|                           |           |                          | Y          | P94800                             | Endevco      | 04/29/2025       |
|                           |           |                          | Z          | P94801                             | Endevco      | 04/29/2025       |
|                           | Redundant |                          | X          | P94802                             | Endevco      | 04/29/2025       |
|                           |           |                          | Y          | P94803                             | Endevco      | 04/29/2025       |
|                           |           |                          | Z          | P97377                             | Endevco      | 04/29/2025       |
| Head Angular Rate Sensors |           |                          | X          | ARS7357                            | DTS          | 07/15/2025       |
|                           |           |                          | Y          | ARS7366                            | DTS          | 07/15/2025       |
|                           |           |                          | Z          | ARS7371                            | DTS          | 07/15/2025       |
| Upper Neck Load Cell      |           | Fx, Fy, Fz<br>Mx, My, Mz | NG2256     | Denton                             | 07/14/2025   |                  |
| Chest Accelerometers      | Primary   |                          | X          | P88719                             | Endevco      | 04/29/2025       |
|                           |           |                          | Y          | P94785                             | Endevco      | 04/29/2025       |
|                           |           |                          | Z          | P94793                             | Endevco      | 04/29/2025       |
|                           | Redundant |                          | X          | P95322                             | Endevco      | 04/29/2025       |
|                           |           |                          | Y          | P95370                             | Endevco      | 04/29/2025       |
|                           |           |                          | Z          | T30901                             | Endevco      | 04/29/2025       |
| Chest Potentiometer       |           | X                        | 142        | Humanetics                         | 04/29/2025   |                  |
| Pelvis Accelerometers     |           |                          | X          | P94798                             | Endevco      | 04/29/2025       |
|                           |           |                          | Y          | P82646                             | Endevco      | 04/29/2025       |
|                           |           |                          | Z          | P97705                             | Endevco      | 04/29/2025       |
| Femur Load Cells          | Right     | Primary                  | Z          | FG126P                             | Denton       | 04/28/2025       |
|                           |           | Redundant                | Z          | FG126R                             | Denton       | 04/28/2025       |
|                           | Left      | Primary                  | Z          | FG127P                             | Denton       | 04/28/2025       |
|                           |           | Redundant                | Z          | FG127R                             | Denton       | 04/28/2025       |
| Tibia Load Cells          | Right     | Upper                    | Mx, My, Fz | TG408                              | Denton       | 01/17/2025       |
|                           |           | Lower                    | Mx, My, Fz | AG116                              | Denton       | 01/17/2025       |
|                           | Left      | Upper                    | Mx, My, Fz | TG480                              | Denton       | 01/17/2025       |
|                           |           | Lower                    | Mx, My, Fz | AG502                              | Denton       | 01/17/2025       |
| Foot Accelerometers       | Right     | Rear                     | X          | P79770                             | Endevco      | 04/29/2025       |
|                           |           |                          | Z          | P79414                             | Endevco      | 04/29/2025       |
|                           |           | Front                    | Z          | P79611                             | Endevco      | 04/29/2025       |
|                           | Left      | Rear                     | X          | P83167                             | Endevco      | 04/29/2025       |
|                           |           |                          | Z          | P83168                             | Endevco      | 04/29/2025       |
|                           |           | Front                    | Z          | P83169                             | Endevco      | 04/29/2025       |
| Seat Belt Load Cells      |           | Lap                      |            | SBG273                             | FTSS         | 10/21/2024       |
|                           |           | Shoulder                 |            | SBG272                             | FTSS         | 10/21/2024       |

**TABLE 3 – VEHICLE INSTRUMENTATION**

| Instrument Location                          |       |           | Axis | Serial Number | Manufacturer | Calibration Date |
|----------------------------------------------|-------|-----------|------|---------------|--------------|------------------|
| Crossmember /<br>Rear Seat<br>Accelerometers | Left  | Primary   | X    | T43456        | Endevco      | 07/31/2025       |
|                                              |       |           | Z    | T45171        | Endevco      | 07/31/2025       |
|                                              |       | Redundant | X    | T43923        | Endevco      | 03/13/2025       |
|                                              | Right | Primary   | X    | T42783        | Endevco      | 08/19/2025       |
|                                              |       |           | Z    | T44122        | Endevco      | 08/19/2025       |
|                                              |       | Redundant | X    | T43962        | Endevco      | 08/11/2025       |
| Engine Accelerometers                        |       | Top       | X    |               |              |                  |
|                                              |       | Bottom    | X    | T43445        | Endevco      | 08/11/2025       |