

**REPORT NUMBER: NCAP-MGA-2007-003**

**NEW CAR ASSESSMENT PROGRAM  
FRONTAL BARRIER IMPACT TEST**

**DAIMLERCHRYSLER CORPORATION  
2007 DODGE NITRO SLT 4X4  
NHTSA NUMBER: M70305**

**PREPARED BY:  
MGA RESEARCH CORPORATION  
5000 WARREN ROAD  
BURLINGTON, WI 53105**



**Test Date: October 20, 2006**

**Final Report Date: November 13, 2006**

**FINAL REPORT**

**PREPARED FOR:  
U.S. DEPARTMENT OF TRANSPORTATION  
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION  
RULEMAKING  
OFFICE OF CRASHWORTHINESS STANDARDS  
400 SEVENTH STREET, SW, ROOM 5311  
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Safety Administration, in response to Contract Number DTNH22-06-D-00028.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by:  Date: 11/13/06  
Ben Fischer, Project Engineer

Reviewed by:  Date: 11/13/06  
David Winkelbauer, Facility Director

### Technical Report Documentation Page

| <b>1. Report No.</b><br>NCAP-MGA-2007-003                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <b>2. Government Accession No.</b>                          | <b>3. Recipient's Catalog No.</b>                                                                                                                                                                                               |                   |                                |              |                  |                   |                  |                            |     |      |     |     |                               |     |    |    |    |                  |        |       |       |       |                   |        |       |       |       |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|--------------------------------|--------------|------------------|-------------------|------------------|----------------------------|-----|------|-----|-----|-------------------------------|-----|----|----|----|------------------|--------|-------|-------|-------|-------------------|--------|-------|-------|-------|
| <b>4. Title and Subtitle</b><br>Final Report of New Car Assessment Program Testing of a 2007 Dodge Nitro SLT 4x4<br>NHTSA No.: M70305                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                             | <b>5. Report Date</b><br>November 13, 2006                                                                                                                                                                                      |                   |                                |              |                  |                   |                  |                            |     |      |     |     |                               |     |    |    |    |                  |        |       |       |       |                   |        |       |       |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                             | <b>6. Performing Organization Code</b><br>MGA                                                                                                                                                                                   |                   |                                |              |                  |                   |                  |                            |     |      |     |     |                               |     |    |    |    |                  |        |       |       |       |                   |        |       |       |       |
| <b>7. Author(s)</b><br>Ben Fischer, Project Engineer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                             | <b>8. Performing Organization Report No.</b><br>NCAP-MGA-2007-003                                                                                                                                                               |                   |                                |              |                  |                   |                  |                            |     |      |     |     |                               |     |    |    |    |                  |        |       |       |       |                   |        |       |       |       |
| <b>9. Performing Organization Name and Address</b><br>MGA Research Corporation<br>5000 Warren Road<br>Burlington, WI 53105                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                             | <b>10. Work Unit No.</b>                                                                                                                                                                                                        |                   |                                |              |                  |                   |                  |                            |     |      |     |     |                               |     |    |    |    |                  |        |       |       |       |                   |        |       |       |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                             | <b>11. Contract or Grant No.</b><br>DTNH22-06-D-00028                                                                                                                                                                           |                   |                                |              |                  |                   |                  |                            |     |      |     |     |                               |     |    |    |    |                  |        |       |       |       |                   |        |       |       |       |
| <b>12. Sponsoring Agency Name and Address</b><br><br>U.S. Department of Transportation<br>National Highway Traffic Safety Administration<br>Rulemaking, Office of Crashworthiness Standards<br>400 Seventh Street, SW, Room 5311<br>Washington, D.C. 20590                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                             | <b>13. Type of Report and Period Covered</b><br>Final Report<br>10/20/06 – 11/13/06                                                                                                                                             |                   |                                |              |                  |                   |                  |                            |     |      |     |     |                               |     |    |    |    |                  |        |       |       |       |                   |        |       |       |       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                             | <b>14. Sponsoring Agency Code</b><br>NVS-111                                                                                                                                                                                    |                   |                                |              |                  |                   |                  |                            |     |      |     |     |                               |     |    |    |    |                  |        |       |       |       |                   |        |       |       |       |
| <b>15. Supplementary Notes</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                             |                                                                                                                                                                                                                                 |                   |                                |              |                  |                   |                  |                            |     |      |     |     |                               |     |    |    |    |                  |        |       |       |       |                   |        |       |       |       |
| <b>16. Abstract</b><br>A frontal barrier impact was conducted on a 2007 Dodge Nitro SLT 4x4 at MGA Research Corporation on October 20, 2006. This test was conducted to obtain data indicant of FMVSS 208, 212, 219 (partial), 301, and foot well intrusion performance. The impact velocity was 56.3 km/h. The ambient temperature at the barrier face at the time of impact was 21 degrees Celsius. The vehicle's maximum post test static crush is 409 mm located to the right of the vehicle centerline. The test vehicle is equipped with a 3-point continuous belt system and an airbag in both front outboard seating positions. With respect to FMVSS 208 "Occupant Crash Protection", the occupant injury criteria summary is as follows: <table border="1" style="width: 100%; margin-top: 10px; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;"><u>Measurement Description</u></th> <th style="text-align: left;"><u>Units</u></th> <th style="text-align: left;"><u>Threshold</u></th> <th style="text-align: left;"><u>Driver ATD</u></th> <th style="text-align: left;"><u>Pass. ATD</u></th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC)</td> <td>N/A</td> <td>1000</td> <td>445</td> <td>388</td> </tr> <tr> <td>Max. Thorax Accel. (3ms Clip)</td> <td>G's</td> <td>60</td> <td>39</td> <td>37</td> </tr> <tr> <td>Left Femur Force</td> <td>Newton</td> <td>10009</td> <td>-4286</td> <td>-3865</td> </tr> <tr> <td>Right Femur Force</td> <td>Newton</td> <td>10009</td> <td>-4488</td> <td>-3571</td> </tr> </tbody> </table> |                                                             |                                                                                                                                                                                                                                 |                   | <u>Measurement Description</u> | <u>Units</u> | <u>Threshold</u> | <u>Driver ATD</u> | <u>Pass. ATD</u> | Head Injury Criteria (HIC) | N/A | 1000 | 445 | 388 | Max. Thorax Accel. (3ms Clip) | G's | 60 | 39 | 37 | Left Femur Force | Newton | 10009 | -4286 | -3865 | Right Femur Force | Newton | 10009 | -4488 | -3571 |
| <u>Measurement Description</u>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <u>Units</u>                                                | <u>Threshold</u>                                                                                                                                                                                                                | <u>Driver ATD</u> | <u>Pass. ATD</u>               |              |                  |                   |                  |                            |     |      |     |     |                               |     |    |    |    |                  |        |       |       |       |                   |        |       |       |       |
| Head Injury Criteria (HIC)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | N/A                                                         | 1000                                                                                                                                                                                                                            | 445               | 388                            |              |                  |                   |                  |                            |     |      |     |     |                               |     |    |    |    |                  |        |       |       |       |                   |        |       |       |       |
| Max. Thorax Accel. (3ms Clip)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | G's                                                         | 60                                                                                                                                                                                                                              | 39                | 37                             |              |                  |                   |                  |                            |     |      |     |     |                               |     |    |    |    |                  |        |       |       |       |                   |        |       |       |       |
| Left Femur Force                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Newton                                                      | 10009                                                                                                                                                                                                                           | -4286             | -3865                          |              |                  |                   |                  |                            |     |      |     |     |                               |     |    |    |    |                  |        |       |       |       |                   |        |       |       |       |
| Right Femur Force                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Newton                                                      | 10009                                                                                                                                                                                                                           | -4488             | -3571                          |              |                  |                   |                  |                            |     |      |     |     |                               |     |    |    |    |                  |        |       |       |       |                   |        |       |       |       |
| <b>17. Key Words</b><br><br>56.3 km/h NCAP Frontal Barrier Impact Test<br>New Car Assessment Program (NCAP)<br>2007 Dodge Nitro SLT 4x4<br>NHTSA No: M70305                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                             | <b>18. Distribution Statement</b><br>Copies of this report are available from:<br>National Highway Traffic Safety Admin., Technical Ref. Division,<br>Room 5108 (NPO-230)<br>400 Seventh Street, S.W.<br>Washington, D.C. 20590 |                   |                                |              |                  |                   |                  |                            |     |      |     |     |                               |     |    |    |    |                  |        |       |       |       |                   |        |       |       |       |
| <b>19. Security Classif. (of this report)</b><br>Unclassified                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <b>20. Security Classif. (of this page)</b><br>Unclassified | <b>21. No. of Pages</b><br>121                                                                                                                                                                                                  | <b>22. Price</b>  |                                |              |                  |                   |                  |                            |     |      |     |     |                               |     |    |    |    |                  |        |       |       |       |                   |        |       |       |       |

## TABLE OF CONTENTS

| <u>Section</u> |                                                | <u>Page No</u> |
|----------------|------------------------------------------------|----------------|
| 1              | Purpose and Summary of the Test                | 1              |
| 2              | Occupant and Vehicle Information / Data Sheets | 3              |

| <u>Data Sheet No.</u> |                                                   | <u>Page No.</u> |
|-----------------------|---------------------------------------------------|-----------------|
| 1                     | Crash Test Summary                                | 3               |
| 2                     | General Test and Vehicle Parameter Data           | 4               |
| 3                     | Test Vehicle Tire Information                     | 6               |
| 4                     | Test Vehicle Information                          | 7               |
| 5                     | Dummy Positioning in Vehicle                      | 9               |
| 6                     | Seat Belt Positioning Data                        | 11              |
| 7                     | Vehicle Accelerometer Locations                   | 12              |
| 8                     | Summary of FMVSS 212 and FMVSS 219 (Partial) Data | 13              |
| 9                     | Summary of FMVSS 301 Data                         | 14              |
| 10                    | Vehicle Measurements                              | 15              |
| 11                    | Camera Locations                                  | 18              |
| 12                    | Photographic Reference Target Locations           | 20              |
| 13                    | Vehicle Intrusion Measurements                    | 21              |
| 14                    | Load Cell Locations on Fixed Barrier              | 24              |
| 15                    | Accident Investigation Division Data              | 25              |
| 16                    | Dummy/Vehicle Temperature Stabilization Chart     | 26              |

| <u>Appendix</u> |                            |   |
|-----------------|----------------------------|---|
| A               | Photographs                | A |
| B               | Dummy Response Data Traces | B |
| C               | Dummy Calibration Data     | C |

## **SECTION 1**

### **PURPOSE AND SUMMARY OF TEST**

#### **PURPOSE**

This frontal barrier impact test is part of the Vehicle Barrier Impact Testing Program sponsored by the National Highway Traffic Safety Administration (NHTSA) under contract number DTNH22-06-D-00028. The purpose of this test was to obtain vehicle crashworthiness and occupant restraint system performance data for an impact in excess of the current 48.3 kph requirements.

#### **SUMMARY**

A load cell barrier was impacted by a 2007 Dodge Nitro SLT 4x4 at a velocity of 56.3 kph. The test was performed at MGA Research Corporation on October 20, 2006. Pre-and post-test photographs of the vehicle and dummies can be found in Appendix A.

One real-time camera and fourteen high-speed cameras were used to document the frontal barrier impact event. Camera locations and other pertinent camera information can be found in this report.

Two Part 572E, 50<sup>th</sup> percentile male anthropomorphic test devices (ATDs), were placed in the driver and right-front passenger seating positions according to dummy placement instructions specified in the Laboratory Indicant Test Procedure.

Both ATDs were fully instrumented with head, chest and pelvis tri-axial accelerometers, chest displacement potentiometer, upper neck transducers, right/left femur load cells, and lower leg instrumentation. The driver (position 1) ATD (Serial No. 065) and right-front passenger (position 2) ATD (Serial No. 066) were calibrated previous to this test. Certification details, along with instrumentation calibration data, are found in Appendix C.

The 102 channels of data were recorded on an on-board data acquisition system. Appendix B contains the dummy head, chest, and femur response data traces.

There was 100 percent windshield retention and no intrusion into the protected zone of the windshield during the event. There was no Stoddard Solvent leakage after the event or during any phase of the static rollover.

The maximum static crush of the vehicle was 409 mm and both the driver and passenger side doors remained closed and latched during the impact event and were operable after the impact.

The driver's head and chest contacted the airbag. The driver's head also contacted the headrest. The driver's knees contacted the bolster. The passenger's head and chest contacted the airbag. The passenger's head also contacted the headrest. The passenger's knees contacted the glove box.

The occupant data is summarized below:

| ATD position | HIC | T <sup>1</sup> | T <sup>2</sup> | Clip<br>(g) | T <sup>1</sup> | T <sup>2</sup> | Chest<br>Disp.<br>(mm) | Left<br>Femur<br>(N) | Right<br>Femur<br>(N) |
|--------------|-----|----------------|----------------|-------------|----------------|----------------|------------------------|----------------------|-----------------------|
| Driver       | 445 | 53.6           | 85.9           | 39          | 74.8           | 77.8           | -29                    | -4286                | -4488                 |
| Passenger    | 388 | 58.1           | 94.1           | 37          | 71.8           | 74.8           | -29                    | -3865                | -3571                 |

The test data can be found on the NHTSA website at [www.nhtsa.dot.gov](http://www.nhtsa.dot.gov).

### TEST NOTES

There was no valid data collected for:  
Passenger Left Ankle Z after 60 msec.

**SECTION 2**  
**OCCUPANT AND VEHICLE INFORMATION / DATA SHEETS**

**DATA SHEET NO. 1**  
**CRASH TEST SUMMARY**

Test Vehicle: 2007 Dodge Nitro SLT 4x4  
Test Program: 35mph Frontal Impact

NHTSA No.: M70305  
Test Date: 10/20/2006

**DOOR OPENING AND SEAT TRACK INFORMATION**

| Description           | Driver                                                         | Passenger                                                      |
|-----------------------|----------------------------------------------------------------|----------------------------------------------------------------|
| Locked/Unlocked Doors | Doors were unlocked                                            | Doors were unlocked                                            |
| Front Door Opening    | Door remained closed and latched;<br>Door opened without tools | Door remained closed and latched;<br>Door opened without tools |
| Rear Door Opening     | Door remained closed and latched;<br>Door opened without tools | Door remained closed and latched;<br>Door opened without tools |
| Seat Track Shift (mm) | 0                                                              | 0                                                              |
| Seat Back Failure     | None                                                           | None                                                           |
| Glazing Damage        | The windshield was cracked.                                    |                                                                |

**VEHICLE REBOUND FROM BARRIER**

| Measured Parameter | Units | Value |
|--------------------|-------|-------|
| Left Side          | mm    | 218   |
| Center             | mm    | 222   |
| Right Side         | mm    | 230   |
| Average            | mm    | 223   |

**BELT LENGTH DATA**

| Measurement Description                          | Units | Driver | Passenger |
|--------------------------------------------------|-------|--------|-----------|
| Shoulder belt length as measured on ATD          | mm    | 844    | 849       |
| Lap belt length as measured on ATD               | mm    | 533    | 578       |
| Remainder of belt on reel                        | mm    | 1617   | 1627      |
| Total belt length for continuous webbing systems | mm    | 2994   | 3054      |

**DATA SHEET NO. 2**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2007 Dodge Nitro SLT 4x4  
 Test Program: 35mph Frontal Impact

NHTSA No.: M70305  
 Test Date: 10/20/2006

**TEST VEHICLE INFORMATION**

|                                                         |                   |
|---------------------------------------------------------|-------------------|
| Manufacturer                                            | Dodge             |
| Model                                                   | Nitro SLT         |
| Body Style                                              | SUV               |
| NHTSA No.                                               | M70305            |
| VIN                                                     | 1D8GU58K57W547196 |
| Color                                                   | Light Khaki Met.  |
| Delivery Date                                           | 10/5/06           |
| Odometer Reading (mile)                                 | 92                |
| Dealer                                                  | Frank Boucher     |
| Transmission                                            | Automatic         |
| Final Drive                                             | 4 Wheel           |
| Number of Cylinders                                     | 6                 |
| Engine Displacement (L)                                 | 3.7               |
| Engine Placement                                        | Longitudinal      |
| Automatic Door Lock (ADL)                               | Yes               |
| Owners Manual Details<br>Instructions on Disabling ADLs | Yes               |
| Bucket Seats                                            | Yes               |

**TEST VEHICLE OPTIONS**

|                                    |     |
|------------------------------------|-----|
| Front Airbag                       | Yes |
| Driver Side Curtain Airbag         | No  |
| Driver Side Torso Airbag           | Yes |
| Rear Passenger Side Curtain Airbag | No  |
| Rear Passenger Side Torso Airbag   | No  |
| Force Limiter                      | Yes |
| Pretensioner                       | Yes |
| Power Steering                     | Yes |
| Power Door Locks                   | Yes |
| Tilt Wheel                         | Yes |
| Air Conditioning                   | Yes |
| Anti-lock Brakes                   | Yes |
| Traction Control                   | Yes |
| All Wheel Drive                    | Yes |
| Power Seats (Driver Only)          | Yes |

**DATA FROM CERTIFICATION LABEL**

|                     |                             |
|---------------------|-----------------------------|
| Manufactured By     | DaimlerChrysler Corporation |
| Date of Manufacture | 9/06                        |

|                 |      |
|-----------------|------|
| GVWR (kg)       | 2541 |
| GAWR Front (kg) | 1248 |
| GAWR Rear (kg)  | 1429 |

| Measured Parameter      | Front  | Rear  | Third | Total |
|-------------------------|--------|-------|-------|-------|
| Type of Seats           | Bucket | Bench |       |       |
| Number of Occupants     | 2      | 3     |       | 5     |
| Capacity Wt. (VCW) (kg) |        |       |       | 521   |
| Cargo Wt. (RCLW) (kg)   |        |       |       | 181   |

**DATA SHEET NO. 2... (CONTINUED)**  
**GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2007 Dodge Nitro SLT 4x4  
 Test Program: 35mph Frontal Impact

NHTSA No.: M70305  
 Test Date: 10/20/2006

**TEST VEHICLE WEIGHTS**

|        | Units | As Delivered (UVW) (Axle) |       |        | As Tested (ATW) (Axle) |        |        |
|--------|-------|---------------------------|-------|--------|------------------------|--------|--------|
|        |       | Front                     | Rear  | Total  | Front                  | Rear   | Total  |
| Left   | kg    | 510.8                     | 487.2 |        | 543.0                  | 596.9  |        |
| Right  | kg    | 491.2                     | 449.5 |        | 522.1                  | 561.6  |        |
| Ratio  | %     | 51.7                      | 48.3  |        | 47.9                   | 52.1   |        |
| Totals | kg    | 1002.0                    | 936.7 | 1938.7 | 1065.1                 | 1158.5 | 2223.6 |

**TARGET TEST WEIGHT CALCULATION**

| Measured Parameter                      | Units | Value  |
|-----------------------------------------|-------|--------|
| Total Delivered Weight (UVW)            | kg    | 1938.7 |
| Weight of 2 P572E ATDs                  | kg    | 156.0  |
| Rated Cargo/Luggage Weight (RCLW)       | kg    | 136.1  |
| Calculated Vehicle Target Weight (TVTW) | kg    | 2230.8 |

**TEST VEHICLE ATTITUDES AND CG**

|              | Units | LF  | RF  | LR  | RR  | CG (aft of front axle) |
|--------------|-------|-----|-----|-----|-----|------------------------|
| As Delivered | mm    | 838 | 837 | 836 | 846 | 1342                   |
| As Tested    | mm    | 830 | 833 | 804 | 811 | 1447                   |
| Post Test    | mm    | 788 | 806 | 821 | 796 |                        |

Vehicle Wheelbase (mm): 2778

Weight of Ballast secured in cargo area (kg): 99.8

Vehicle Components Removed: Cargo platform, left rear tail light,  
cargo carpet, jack, and insulation


Ballast weight does not include instrumentation and data acquisition system.

### DATA SHEET NO. 3

#### TEST VEHICLE TIRE INFORMATION

Test Vehicle: 2007 Dodge Nitro SLT 4x4  
 Test Program: 35mph Frontal Impact

NHTSA No.: M70305  
 Test Date: 10/20/2006

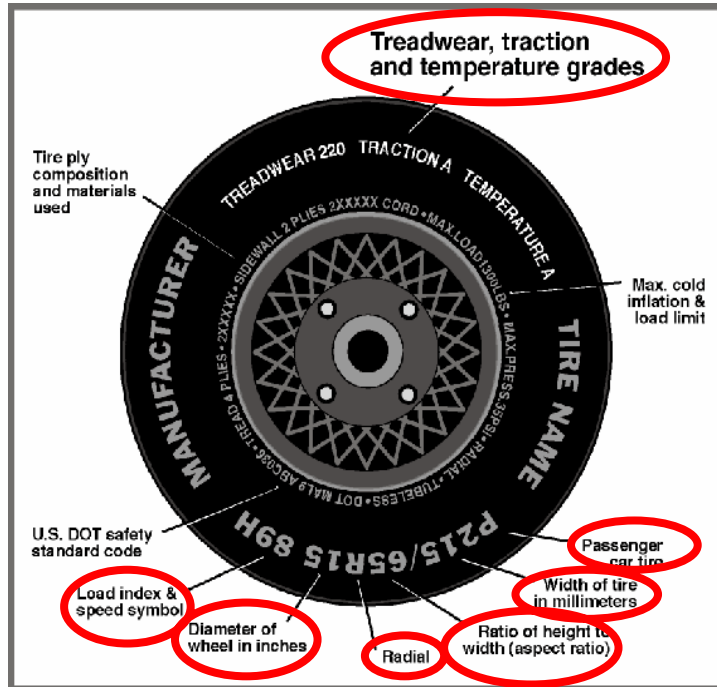

#### DATA FROM TIRE PLACARD

| Measured Parameter                      | Front       | Rear        |
|-----------------------------------------|-------------|-------------|
| Maximum Tire Pressure (kPa)             | 300         | 300         |
| Cold Pressure (kPa)                     | 228         | 228         |
| Recommended Tire Size                   | P235/65R17  | P235/65R17  |
| Tire Size on Vehicle                    | P235/65R17  | P235/65R17  |
| Tire Manufacturer                       | Goodyear    | Goodyear    |
| Tire Name                               | Wrangler HP | Wrangler HP |
| Tire Type                               | Passenger   | Passenger   |
| Tire Width (mm)                         | 235         | 235         |
| Ratio of Height to Width (aspect ratio) | 65          | 65          |
| Radial                                  | R           | R           |
| Wheel Diameter                          | 17          | 17          |
| Load Index & Speed Symbol               | 103S        | 103S        |
| Treadwear                               | 340         | 340         |
| Traction Grade                          | A           | A           |
| Temperature Grade                       | B           | B           |

# **DATA SHEET NO. 4** **TEST VEHICLE INFORMATION**

Test Vehicle: 2007 Dodge Nitro SLT 4x4  
 Test Program: 35mph Frontal Impact

NHTSA No.: M70305  
 Test Date: 10/20/2006

## **NORMAL DESIGN RIDING POSITION**


The driver and passenger seat back is positioned to the manufacturer's designated angle. The procedure is as follows: Ensure vehicle is level. Driver: Remove rear seat cover to expose outboard seat frame. Place inclinometer on exposed frame at the top of the seat frame (above crossmember). Position seat to 23.5 degrees. Passenger: Remove rear seat cover to expose outboard seat frame. Place inclinometer on exposed frame. Position seat to 23.5 degrees.

Driver seat back angle: 23.4 degrees on seat frame

Passenger seat back angle: 23.6 degrees on seat frame


## **SEAT FORE/AFT POSITIONING**

|                | Total Fore/Aft Travel | Placed in Position #                          |
|----------------|-----------------------|-----------------------------------------------|
| Driver Seat    | 268 mm                | 134 mm                                        |
| Passenger Seat | 24 detents            | 13 <sup>th</sup> detent, 1 <sup>st</sup> as 1 |

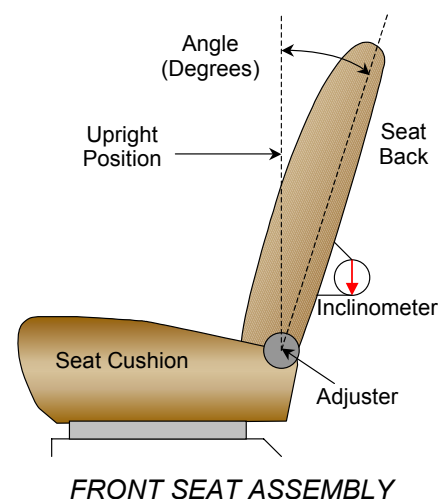

## **ADJUSTABLE D-RING POSITION**

The driver and passenger D-rings were placed in mid position.

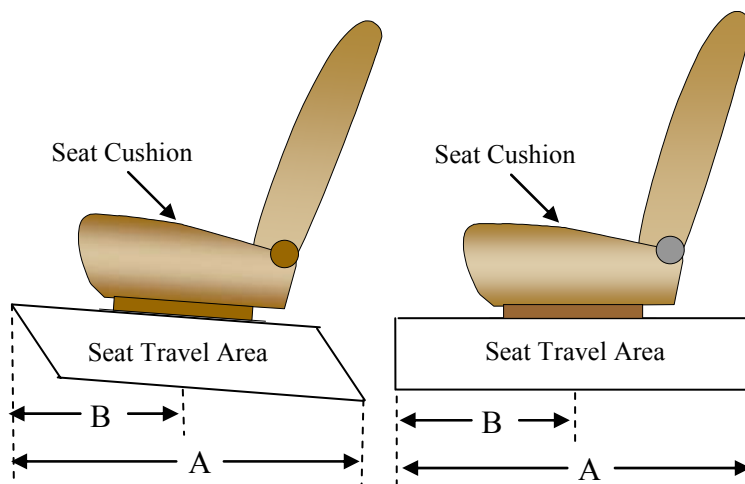

## DATA SHEET NO. 4...(CONTINUED)

### TEST VEHICLE INFORMATION


Test Vehicle: 2007 Dodge Nitro SLT 4x4  
Test Program: 35mph Frontal Impact

NHTSA No.: M70305  
Test Date: 10/20/2006

### FUEL TANK CAPACITY

|                                    | Liters      |
|------------------------------------|-------------|
| Usable Capacity of "Standard Tank" | 73.8        |
| Usable Capacity of "Optional" Tank |             |
| 92-94% of Usable Capacity          | 67.9 – 69.4 |
| Actual Amount of Solvent used      | 69.1        |
| 1/3 of Usable Capacity             | 24.6        |


The test vehicle is equipped with an electric fuel pump. Pump will run when the vehicle's electrical system is activated.

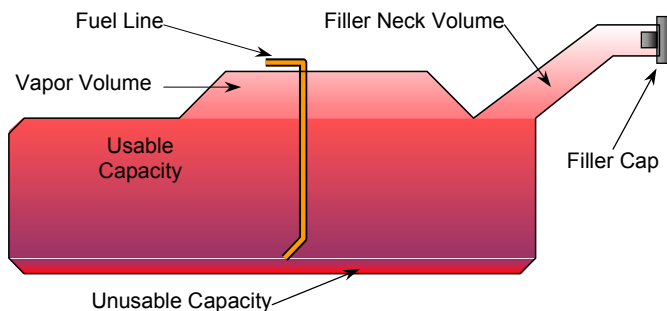

VEHICLE FUEL TANK ASSEMBLY

### STEERING COLUMN ADJUSTMENT

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes when moved through its full range of motion. An aluminum plate is placed across the rim of the steering wheel, an inclinometer is placed on the plate and the angle is measured.

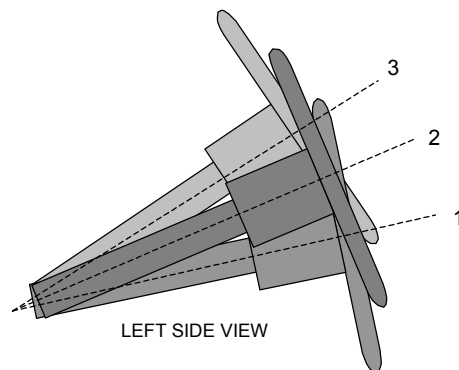

STEERING COLUMN ASSEMBLY

### STEERING COLUMN POSITIONS

|                                 | Fore/Aft Position (mm) | Degrees |
|---------------------------------|------------------------|---------|
| Lowermost position No. 1        |                        | 19.4    |
| Geometric center position No. 2 |                        | 22.4    |
| Uppermost position No. 3        |                        | 25.4    |


## DATA SHEET NO. 5

### DUMMY POSITIONING IN VEHICLE

Test Vehicle: 2007 Dodge Nitro SLT 4x4  
 Test Program: 35mph Frontal Impact

NHTSA No.: M70305  
 Test Date: 10/20/2006

#### DUMMY MEASUREMENTS FOR FRONT SEAT OCCUPANTS

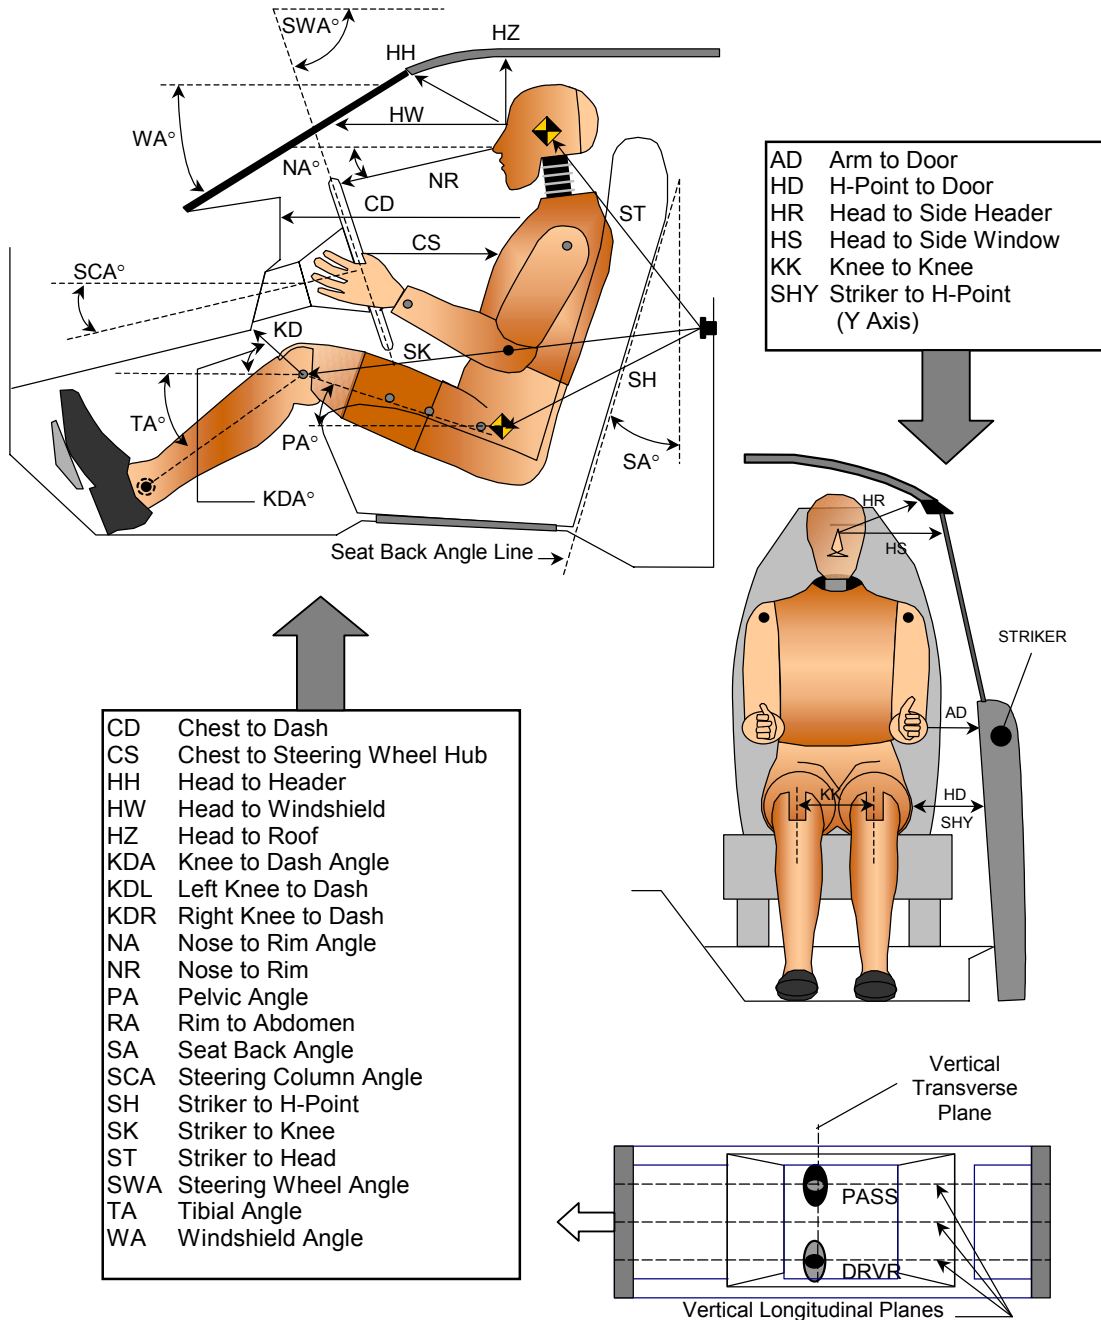

# DATA SHEET NO. 5... (CONTINUED)

## DUMMY POSITIONING IN VEHICLE

Test Vehicle: 2007 Dodge Nitro SLT 4x4  
 Test Program: 35mph Frontal Impact

NHTSA No.: M70305  
 Test Date: 10/20/2006


### TEST DUMMY POSITION MEASUREMENTS

| Code | Measurement Description      | Driver      |           | Passenger   |           |
|------|------------------------------|-------------|-----------|-------------|-----------|
|      |                              | Length (mm) | Angle (°) | Length (mm) | Angle (°) |
| WA   | Windshield Angle             |             | 40.0      |             |           |
| SWA  | Steering Wheel Angle         |             | 67.6      |             |           |
| SCA  | Steering Column Angle        |             | 24.4      |             |           |
| SA   | Seat Back Angle (seat frame) |             | 23.4      |             | 23.6      |
| HZ   | Head to Roof (Z)             | 200         | 90        | 198         | 90        |
| HH   | Head to Header               | 392         | 14.0      | 398         | 17.5      |
| HW   | Head to Windshield           | 522         | 0         | 517         | 0         |
| HR   | Head to Side Header (Y)      | 202         |           | 200         |           |
| NR   | Nose to Rim                  | 392         | 19.2      |             |           |
| CD   | Chest to Dash                | 520         |           | 558         |           |
| CS   | Chest to Steering Hub        | 330         | 16.3      |             |           |
| RA   | Rim to Abdomen               | 151         | 0         |             |           |
| KDL  | Left Knee to Dash            | 124         | 8.4       | 110         |           |
| KDR  | Right Knee to Dash           | 122         |           | 117         | 1.2       |
| PA   | Pelvic Angle                 |             | 23.5      |             | 21.9      |
| TA   | Tibia Angle                  |             | 52.7      |             | 52.4      |
| KK   | Knee to Knee (Y)             | 301         |           | 275         |           |
| SK   | Striker to Knee              | 654         | 93.0      | 662         | 92.4      |
| ST   | Striker to Head              | 573         | 13.1      | 572         | 14.1      |
| SH   | Striker to H-Point           | 273         | 111.2     | 275         | 111.9     |
| SHY  | Striker to H-Point (Y)       | 217         |           | 230         |           |
| HS   | Head to Side Window          | 349         |           | 354         |           |
| HD   | H-Point to Door (Y)          | 187         |           | 196         |           |
| AD   | Arm to Door (Y)              | 91          |           | 145         |           |
| AA   | Ankle to Ankle               | 259         |           | 195         |           |

# **DATA SHEET NO. 6** **SEAT BELT POSITIONING DATA**

Test Vehicle: 2007 Dodge Nitro SLT 4x4  
 Test Program: 35mph Frontal Impact

NHTSA No.: M70305  
 Test Date: 10/20/2006

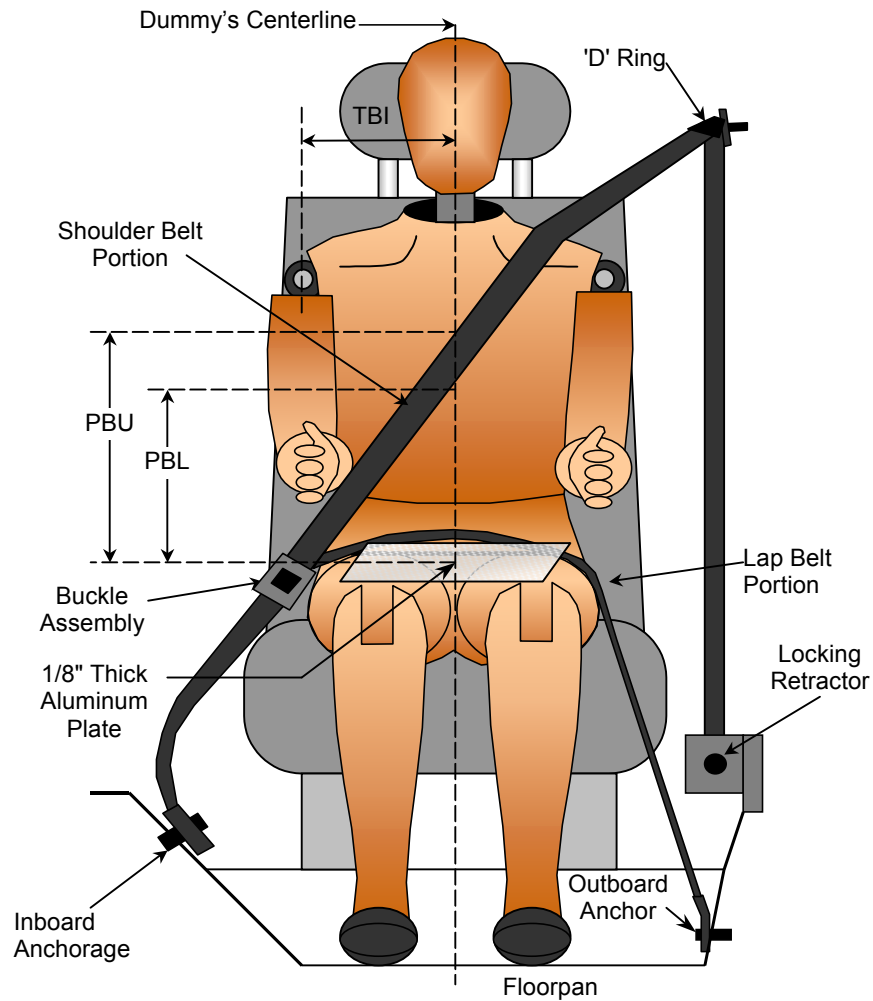

## **SEAT BELT POSITIONING MEASUREMENTS**

| Measurement Description                           | Units | Driver | Passenger |
|---------------------------------------------------|-------|--------|-----------|
| PBU - Top surface of reference to belt upper edge | mm    | 322    | 320       |
| PBL - To surface of reference to belt lower edge  | mm    | 240    | 240       |

**DATA SHEET NO. 7**  
**VEHICLE ACCELEROMETER LOCATIONS**



Test Vehicle: 2007 Dodge Nitro SLT 4x4  
 Test Program: 35mph Frontal Impact

NHTSA No.: M70305  
 Test Date: 10/20/2006

**VEHICLE ACCELEROMETER PRE-TEST LOCATIONS**

| No. | Accelerometer Location | Measurements (mm) |      |     |
|-----|------------------------|-------------------|------|-----|
|     |                        | X                 | Y    | Z   |
| 1   | Left Rear X-Member X   | 1112              | -282 | 720 |
| 2   | Right Rear X-Member X  | 1112              | 282  | 720 |
| 3   | Engine Top X           | 3722              | 0    | 970 |
| 4   | Engine Bottom X        | 3540              | 0    | 290 |
| 5   | Left Brake Caliper X   | 3629              | -650 | 300 |
| 6   | Right Brake Caliper X  | 3629              | 650  | 300 |
| 7   | Instrument Panel X     |                   |      |     |
| 8   | Left Rear X-Member Z   | 1112              | -282 | 720 |
| 9   | Right Rear X-Member Z  | 1112              | 282  | 720 |

Reference Points: X - Rear Surface of Vehicle (+ forward)  
 Y - Vehicle Centerline (+ to right)  
 Z - Ground Plane (+ up)

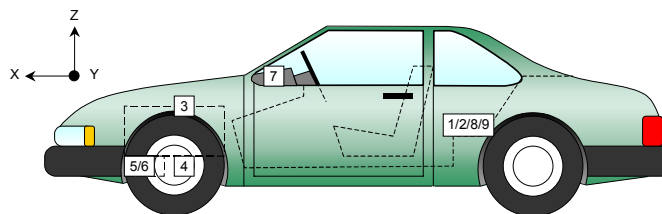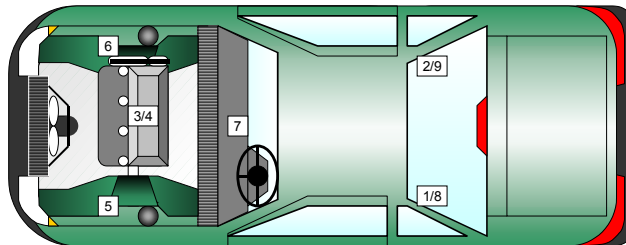

## DATA SHEET NO. 8

### SUMMARY OF FMVSS 212 AND FMVSS 219 (Partial) DATA

Test Vehicle: 2007 Dodge Nitro SLT 4x4  
 Test Program: 35mph Frontal Impact

NHTSA No.: M70305  
 Test Date: 10/20/2006

#### Windshield Mounting Details:


Windshield glass is secured to the vehicle frame with a rubber trim and glue.

The standard requires that the post-test retention measurement be a minimum of 75 percent of the pretest total periphery measurement for vehicles not equipped with occupant passive restraints and 50 percent for each side of the windshield for vehicles, which are equipped with occupant passive restraints.

Temperature of windshield molding during test: 21°C

#### WINDSHIELD PERIPHERY MEASUREMENTS

| Measurement | Pre-Test (mm) | Post-Test (mm) | % of Retention |
|-------------|---------------|----------------|----------------|
| Left Side   | 2056          | 2056           | 100            |
| Right Side  | 2056          | 2056           | 100            |
| Total       | 4112          | 4112           | 100            |

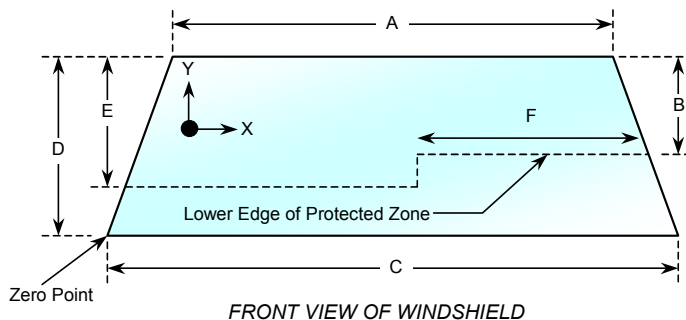

| Item | Units | Value |
|------|-------|-------|
| A    | mm    | 1345  |
| B    | mm    | 435   |
| C    | mm    | 1407  |
| D    | mm    | 680   |
| E    | mm    | 435   |
| F    | mm    | 558   |

#### AREA OF PROTECTED ZONE FAILURES - NONE

A. Provide coordinates of the area that the protected zone was penetrated more than 0.25 inches by a vehicle component other than one that is normally in contact with the windshield. **None**

| X | Y |
|---|---|
|   |   |
|   |   |
|   |   |
|   |   |

B. Provide coordinates of the area beneath the protected zone that the inner surface of the windshield was penetrated by a vehicle component. **None**

| X | Y |
|---|---|
|   |   |
|   |   |
|   |   |
|   |   |

**DATA SHEET NO. 9**  
**SUMMARY OF FMVSS 301 DATA**

Test Vehicle: 2007 Dodge Nitro SLT 4x4  
 Test Program: 35mph Frontal Impact

NHTSA No.: M70305  
 Test Date: 10/20/2006


**FMVSS 301 FUEL SYSTEM INTEGRITY POST IMPACT DATA**

Temperature at Time of Impact: 21° C      Test Time: 10:40 am

**Stoddard Solvent Spillage Measurements**

- A. From impact until vehicle motion ceases: 0 oz.  
 (Maximum Allowable = 1 ounce)
- B. For the 5 minute period after motion ceases: 0 oz.  
 (Maximum Allowable = 5 ounces)
- C. For the following 25 minutes: 0 oz.  
 (Maximum Allowable = 1 oz. /minute)
- D. Spillage: None

**FMVSS 301 STATIC ROLLOVER DATA**

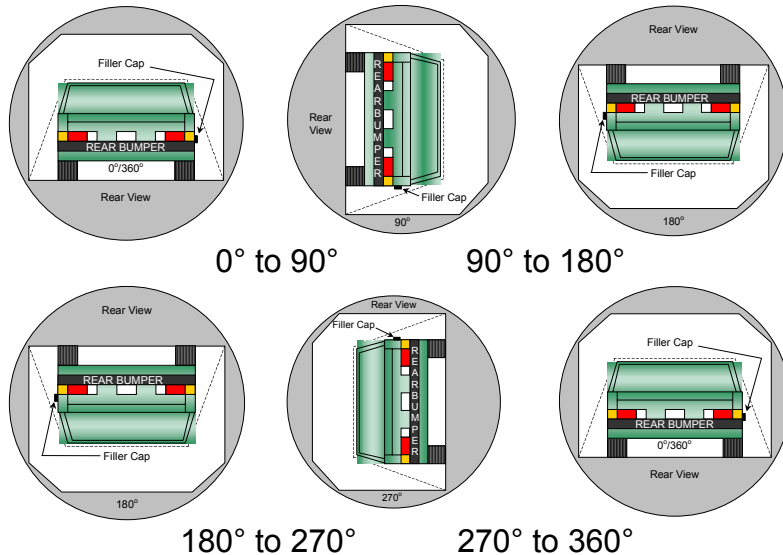

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.

2. The position hold time at each position is 300 seconds (minimum).

3. Details of Stoddard Solvent spillage locations:  
**None**

| Test Phase   | Rotation Time (sec.) | Hold Time (sec.) | Spillage (oz.) |
|--------------|----------------------|------------------|----------------|
| 0° to 90°    | 121                  | 300              | 0              |
| 90° to 180°  | 117                  | 300              | 0              |
| 180° to 270° | 110                  | 300              | 0              |
| 270° to 360° | 116                  | 300              | 0              |

**DATA SHEET NO. 10**  
**VEHICLE MEASUREMENTS**

Test Vehicle: 2007 Dodge Nitro SLT 4x4  
Test Program: 35mph Frontal Impact

NHTSA No.: M70305  
Test Date: 10/20/2006


| No. | Measurement Description                      | Units | Pre-Test | Post-Test | Difference |
|-----|----------------------------------------------|-------|----------|-----------|------------|
| 1   | Total length of vehicle at centerline        | mm    | 4492     | 4095      | 397        |
| 2   | RSOV to front of engine                      | mm    | 3922     | 3795      | 127        |
| 3   | RSOV to firewall centerline                  | mm    | 3438     | 3377      | 61         |
| 4   | RSOV to leading edge of right door           | mm    | 3147     | 3158      | -11        |
| 5   | RSOV to leading edge of left door            | mm    | 3148     | 3146      | 2          |
| 6   | RSOV to lower leading edge of right door     | mm    | 3140     | 3152      | -12        |
| 7   | RSOV to lower leading edge of left door      | mm    | 3157     | 3138      | 19         |
| 8   | RSOV to upper leading edge of right door     | mm    | 2065     | 2082      | -17        |
| 9   | RSOV to upper leading edge of left door      | mm    | 2060     | 2078      | -18        |
| 10  | RSOV to lower trailing edge of right door    | mm    | 2072     | 2076      | -4         |
| 11  | RSOV to lower trailing edge of left door     | mm    | 2068     | 2068      | 0          |
| 12  | RSOV to bottom of right 'A' pillar           | mm    | 3132     | 3139      | -7         |
| 13  | RSOV to bottom of left 'A' pillar            | mm    | 3145     | 3132      | 13         |
| 14  | RSOV to firewall on right side               | mm    | 3440     | 3486      | -46        |
| 15  | RSOV to firewall on left side                | mm    | 3442     | 3469      | -27        |
| 16  | RSOV to steering column                      | mm    | 2687     | 2734      | -47        |
| 17  | Center of steering column to left 'A' pillar | mm    | 420      | 336       | 84         |
| 18  | Center of steering column to headlining      | mm    | 476      | 390       | 86         |
| 19  | RSOV to right side of front bumper           | mm    | 4391     | 4092      | 299        |
| 20  | RSOV to left side of front bumper            | mm    | 4392     | 4072      | 320        |
| 21  | Length of engine block                       | mm    | 600      | 600       | 0          |
| RD  | RSOV to right side of dash panel             | mm    | 2945     | 2919      | 26         |
| CD  | RSOV to center of dash panel                 | mm    | 2980     | 2925      | 55         |
| LD  | RSOV to left side of dash panel              | mm    | 2945     | 2925      | 20         |

# DATA SHEET NO. 10... (continued)

## VEHICLE MEASUREMENTS

Test Vehicle: 2007 Dodge Nitro SLT 4x4  
 Test Program: 35mph Frontal Impact

NHTSA No.: M70305  
 Test Date: 10/20/2006

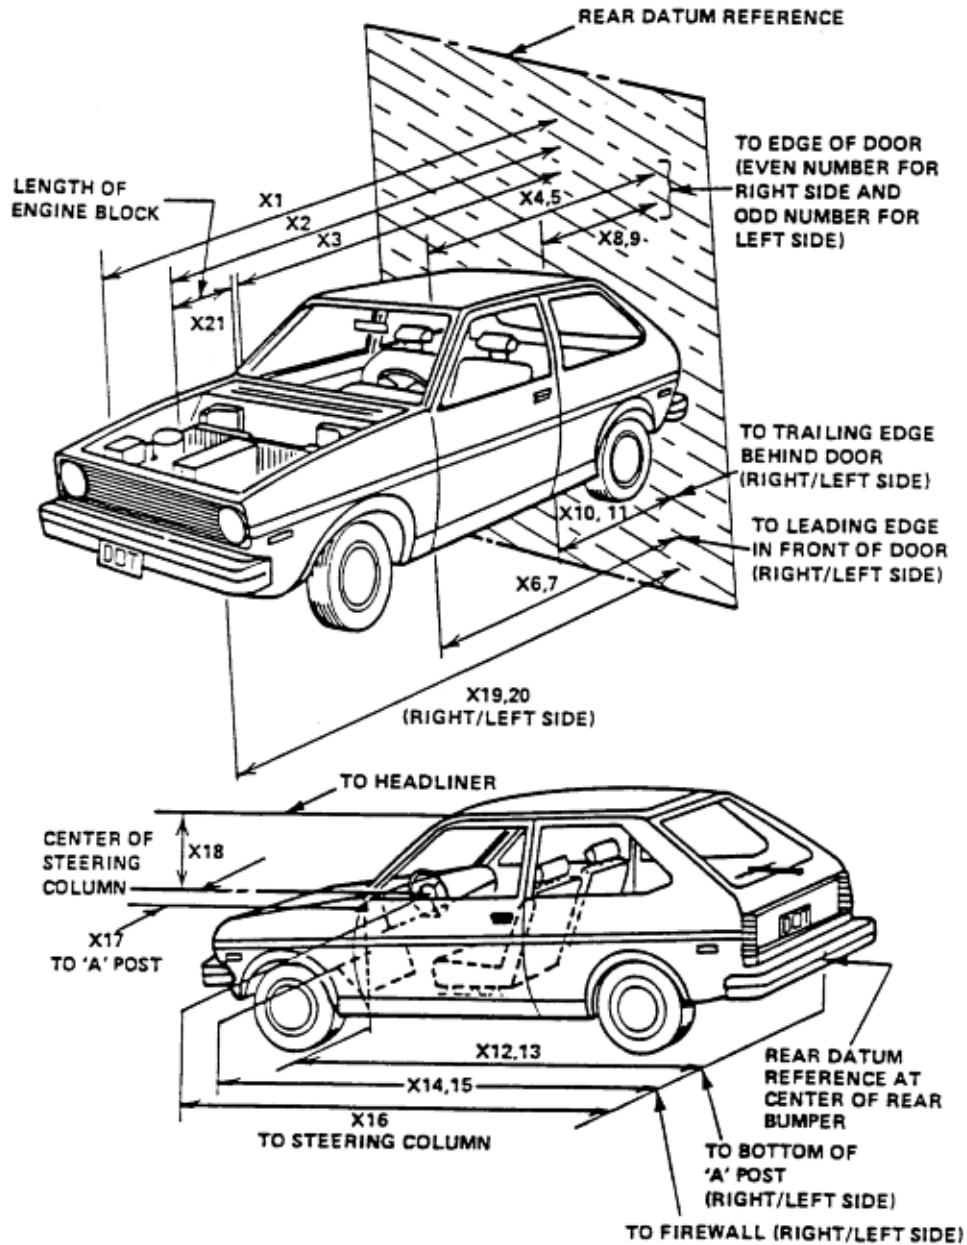

**DATA SHEET NO. 10... (continued)****VEHICLE MEASUREMENTS**

Test Vehicle: 2007 Dodge Nitro SLT 4x4  
Test Program: 35mph Frontal Impact

NHTSA No.: M70305  
Test Date: 10/20/2006

**Target Vehicle Structural Measurement**

|    | Elements                              | Pre-Test (mm) |
|----|---------------------------------------|---------------|
| 1  | Total Length                          | 4492          |
| 2  | Total Width                           | 1765          |
| 3  | Bumper Top Height                     | 635           |
| 4  | Bumper Bottom Height                  | 480           |
| 5  | Longitudinal Member Top Height        | 605           |
| 6  | Distance between Longitudinal Members | 805           |
| 7  | Longitudinal Member Width             | 75            |
| 8  | Engine Top Height                     | 1000          |
| 9  | Engine Bottom Height                  | 290           |
| 10 | Engine and gearbox width              | 1130          |
| 11 | Front bumper-engine distance          | 500           |
| 12 | Front shock absorber fixing height    | 850           |
| 13 | Bonnet leading edge height            | 1055          |
| 14 | Front shock absorber fixing width     | 1300          |
| 15 | Front bumper – front axle distance    | 642           |
| 16 | Front axle – a pillar distance        | 635           |
| 17 | A-pillar – B-pillar distance          | 1092          |
| 18 | B-Pillar – rear axle distance         | 1040          |
| 19 | B-pillar – C-pillar distance          | 934           |
| 20 | Roof sill bottom height               | 1635          |
| 21 | Roof sill top height                  | 1680          |
| 22 | Floor sill bottom height              | 350           |
| 23 | Floor sill top height                 | 455           |

**DATA SHEET NO. 11**  
**CAMERA LOCATIONS**

Test Vehicle: 2007 Dodge Nitro SLT 4x4  
Test Program: 35mph Frontal Impact

NHTSA No.: M70305  
Test Date: 10/20/2006

| No. | Camera View              | Location (mm) * |       |       | Lens (mm) | Speed (fps) |
|-----|--------------------------|-----------------|-------|-------|-----------|-------------|
|     |                          | X               | Y     | Z     |           |             |
| 1   | Real-Time Left Side View |                 |       |       | 13        | 24          |
| 2   | Left Front View          | 965             | -5140 | 1210  | 25        | 1000        |
| 3   | Steering Column Top      | 1140            | -5395 | 1355  | 25        | 1000        |
| 4   | Steering Column Bottom   | 1150            | -5395 | 910   | 25        | 1000        |
| 5   | Driver Close-up          | 1385            | -6825 | 1505  | 35        | 1000        |
| 6   | Driver Angle             | 6205            | -4760 | 2045  | 50        | 1000        |
| 7   | On board Driver Side     |                 |       |       |           |             |
| 8   | On board Passenger Side  |                 |       |       |           |             |
| 9   | Right Overall            | 2010            | 7175  | 1230  | 24        | 1000        |
| 10  | Right Passenger Half     | 1115            | 5080  | 1255  | 24        | 1000        |
| 11  | Right Close-up           | 1435            | 6835  | 1510  | 35        | 1000        |
| 12  | Right Angle              | 6205            | 4700  | 2080  | 50        | 1000        |
| 13  | Windshield               | -285            | 0     | 2830  | 19        | 1000        |
| 14  | Top Driver               | -60             | -405  | 2225  | 24        | 1000        |
| 15  | Top Passenger            | -70             | 490   | 2220  | 24        | 1000        |
| 16  | Pit Front                | 1295            | 0     | -3150 | 24        | 1000        |
| 17  | Pit Rear                 | 3225            | 0     | -3150 | 24        | 1000        |

**\*COORDINATES:**

+X = forward of impact plane  
+Y = right of monorail centerline  
+Z = above ground level

Note: Cameras 7 and 8 were not used for this test.



DATA SHEET NO. 11... (continued)

CAMERA LOCATIONS

Test Vehicle: 2007 Dodge Nitro SLT 4x4  
Test Program: 35mph Frontal Impact

NHTSA No.: M70305  
Test Date: 10/20/2006

CAMERA POSITIONS FOR FRONTAL IMPACTS


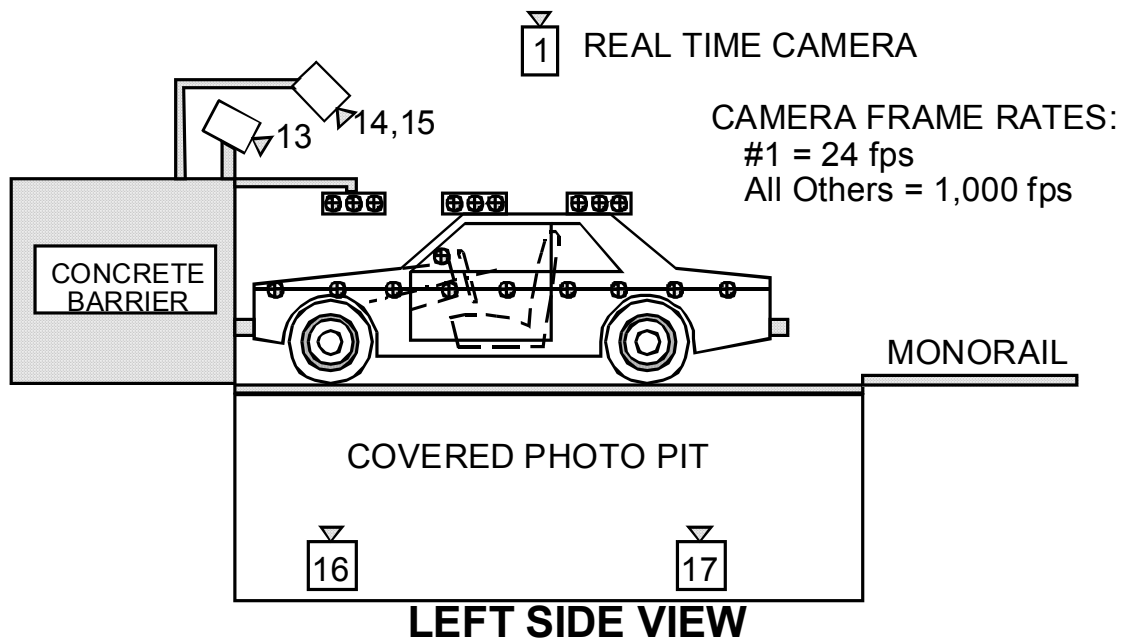
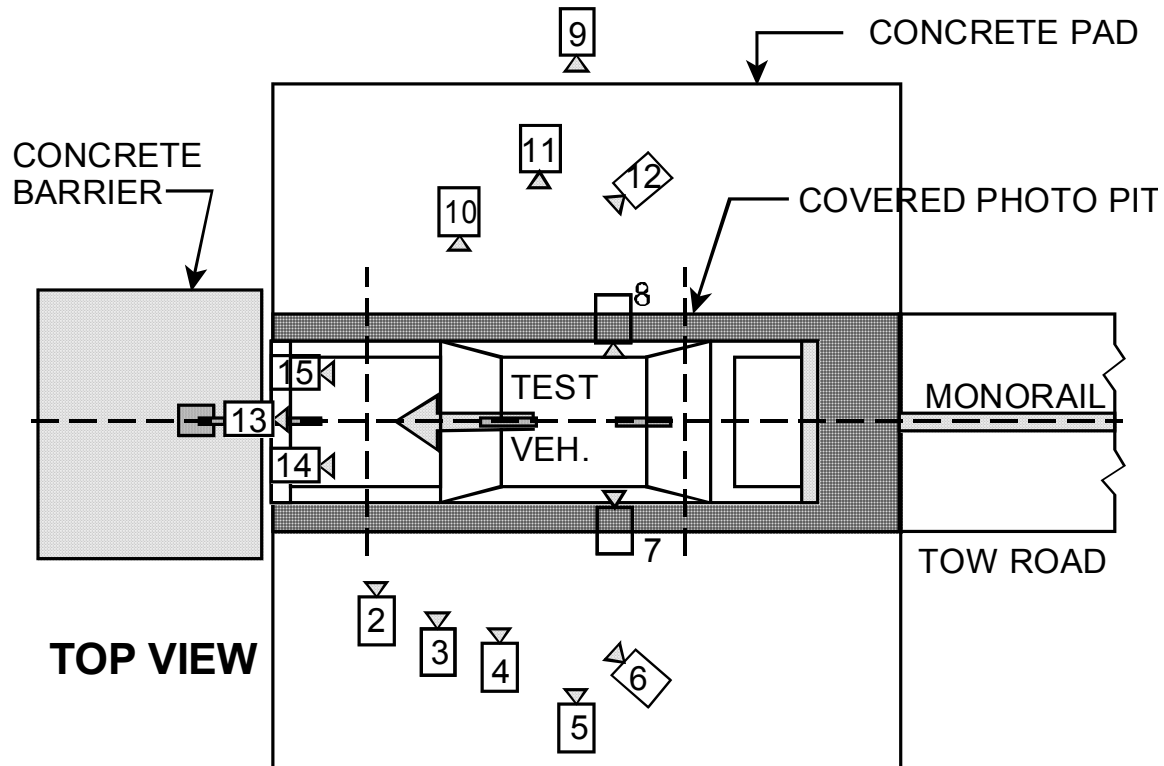


# **DATA SHEET NO. 12** **PHOTOGRAPHIC REFERENCE TARGET LOCATIONS**

Test Vehicle: 2007 Dodge Nitro SLT 4x4  
 Test Program: 35mph Frontal Impact

NHTSA No.: M70305  
 Test Date: 10/20/2006

| Item | Value |
|------|-------|
| A    | 403   |
| B    | 882   |
| C    | 2096  |
| D    | 611   |
| E    | 1785  |
| F    | 1748  |
| G    |       |
| H    | 1238  |
| I    | 1322  |
| J    | 763   |
| K    | 774   |
| L    | 1633  |
| M    | 1225  |
| N    | 1636  |
| O    | 734   |
| P    | 794   |
| Q    | 1328  |

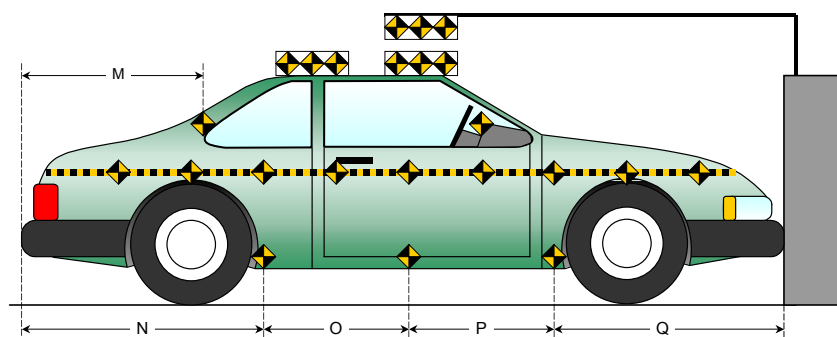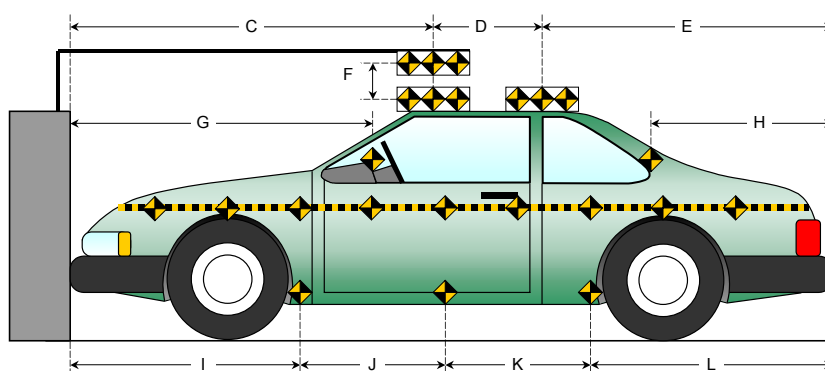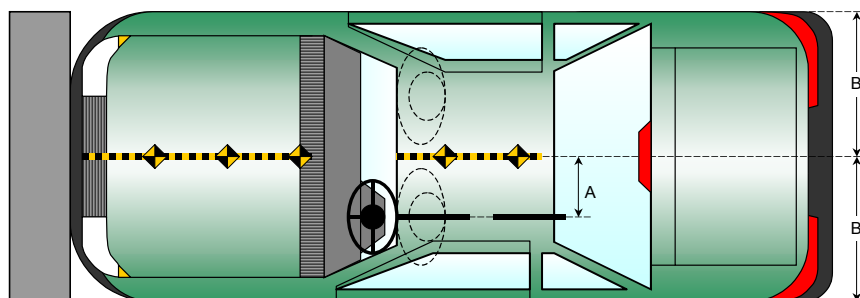

**DATA SHEET NO. 13**  
**VEHICLE INTRUSION MEASUREMENTS**

Test Vehicle: 2007 Dodge Nitro SLT 4x4  
 Test Program: 35mph Frontal Impact


NHTSA No.: M70305  
 Test Date: 10/20/2006

**DOOR OPENING WIDTH**

| Item | Description      | Units | Pre-Test | Post-Test | Difference |
|------|------------------|-------|----------|-----------|------------|
| A    | Left Side Upper  | mm    | 990      | 982       | 8          |
| B    | Left Side Lower  | mm    | 938      | 936       | 2          |
| D    | Right Side Upper | mm    | 993      | 997       | -4         |
| E    | Right Side Lower | mm    | 945      | 946       | -1         |

**WHEELBASE MEASUREMENTS**

| Item | Description          | Units | Pre-Test | Post-Test | Difference |
|------|----------------------|-------|----------|-----------|------------|
| C    | Left Side Wheelbase  | mm    | 2778     | 2681      | 97         |
| F    | Right Side Wheelbase | mm    | 2777     | 2670      | 107        |

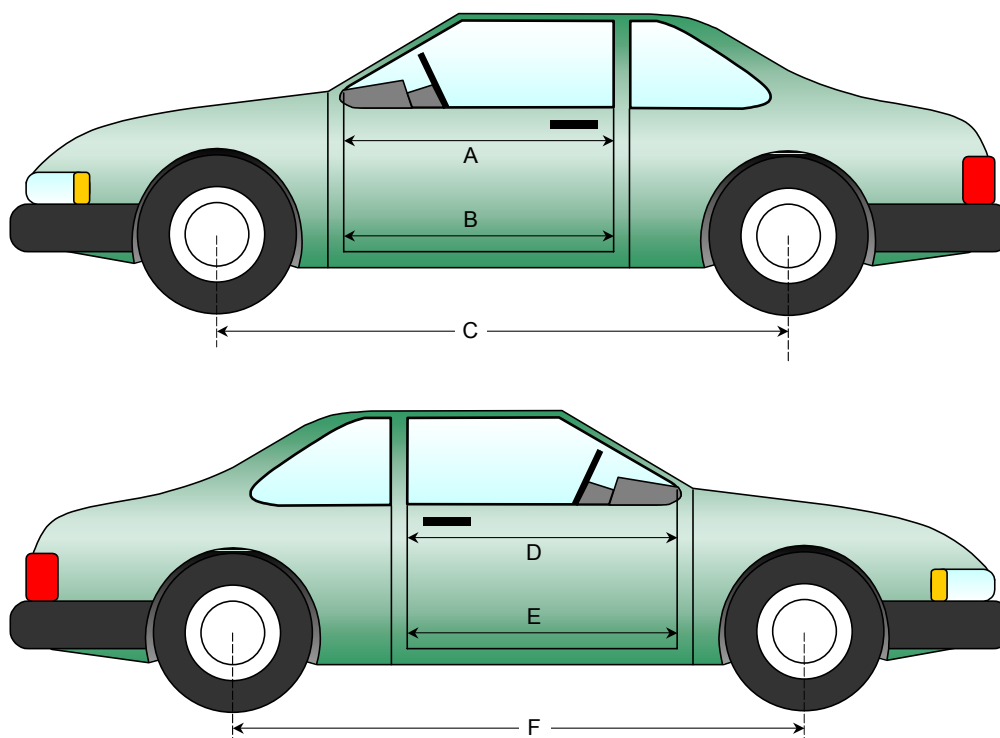

**DATA SHEET NO. 13... (continued)**  
**VEHICLE INTRUSION MEASUREMENTS**


Test Vehicle: 2007 Dodge Nitro SLT 4x4  
 Test Program: 35mph Frontal Impact

NHTSA No.: M70305  
 Test Date: 10/20/2006

**DRIVER COMPARTMENT INTRUSION**

| Item | Description                              | Units | Pre-Test | Post-Test | Difference |
|------|------------------------------------------|-------|----------|-----------|------------|
| AB   | Door Opening (Inside window jam)         | mm    | 604      | 604       | 0          |
| CX   | Left Knee Bolster to X                   | mm    | 227      | 233       | -6         |
| DX   | Right Knee Bolster to X                  | mm    | 227      | 235       | -8         |
| EX   | Brake Pedal to X                         | mm    | 480      | 422       | 58         |
| FX   | Foot Rest to X                           | mm    |          |           |            |
| GX   | Center of Steering Column Wheel Hub to X | mm    | 0        | 47        | -47        |

X = Front of Seat Track (stationary)

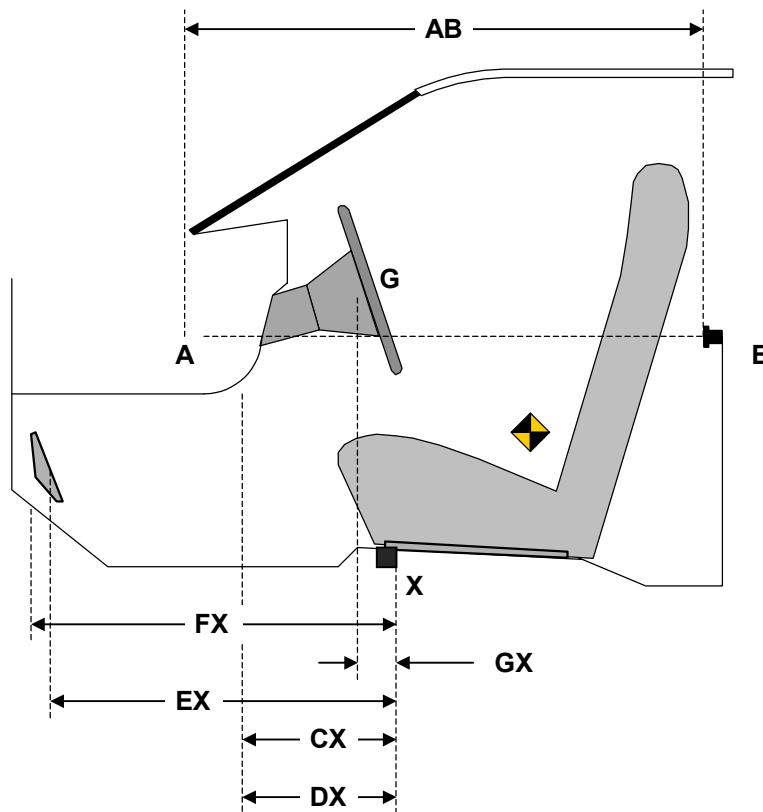


**DRIVER COMPARTMENT**


**DATA SHEET NO. 13... (continued)**  
**VEHICLE INTRUSION MEASUREMENTS**

Test Vehicle: 2007 Dodge Nitro SLT 4x4  
 Test Program: 35mph Frontal Impact

NHTSA No.: M70305  
 Test Date: 10/20/2006

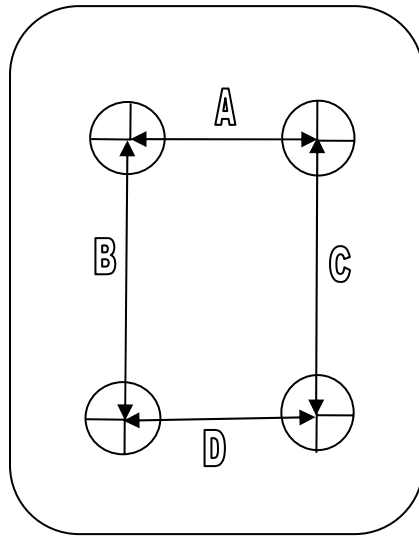

Driver

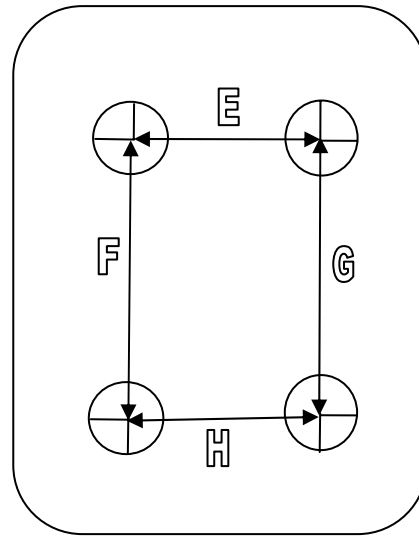

Passenger

**UNDERBODY FLOORBOARD DEFORMATION**

| Measurement | Pre-Test | Post-Test | Difference |
|-------------|----------|-----------|------------|
| A           | 238      | 238       | 0          |
| B           | 184      | 184       | 0          |
| C           | 175      | 175       | 0          |
| D           | 200      | 200       | 0          |
| E           | 222      | 222       | 0          |
| F           | 163      | 163       | 0          |
| G           | 190      | 190       | 0          |
| H           | 215      | 215       | 0          |

# DATA SHEET NO. 14


## LOAD CELL LOCATIONS ON FIXED BARRIER

Test Vehicle: 2007 Dodge Nitro SLT 4x4  
 Test Program: 35mph Frontal Impact

NHTSA No.: M70305  
 Test Date: 10/20/2006

### 30 Load Cell Rigid Barrier

#### Load Cell Locations on Fixed Barrier

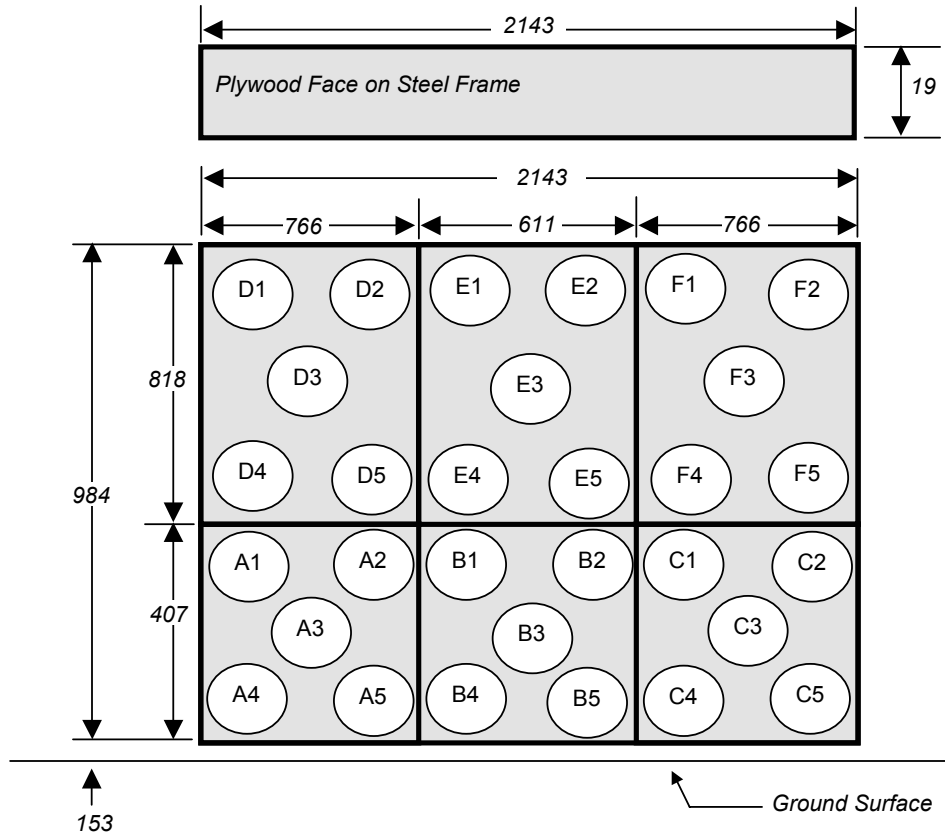

|                  |                  |                  |
|------------------|------------------|------------------|
| Group 4<br>D1-D5 | Group 5<br>E1-E5 | Group 6<br>F1-F5 |
| Group 1<br>A1-A5 | Group 2<br>B1-B5 | Group 3<br>C1-C5 |

6 Groups of 5 Load Cells Each

**DATA SHEET NO. 15**  
**ACCIDENT INVESTIGATION DIVISION DATA**

Test Vehicle: 2007 Dodge Nitro SLT 4x4      NHTSA No.: M70305  
 Test Program: 35mph Frontal Impact      Test Date: 10/20/2006

**VEHICLE INFORMATION**

VIN: 1D8GU58K57W547196      Wheelbase (mm) : 2778  
 Vehicle Size Category: SUV      Test Weight (kg) : 2223.6

**ACCELEROMETER DATA**

Accelerometer Locations: As per measurements on Page 12  
 Cal. Procedure/Interval: MGA procedure / 6 month  
 Integration Algorithm: Trapezoidal      Linearity: > 99%  
 Impact Velocity (km/h): 56.3  
 Velocity Change (km/h): 62.7      Time of Separation (msec): 113

**CRUSH PROFILE**

Collision Deformation Classification: Frontal      Midpoint of Damage: Centerline  
 Damage Region Length (mm): 1213      Impact Mode: Frontal


| No. | Measurement Description    | Units | Pre-Test | Post-Test | Difference |
|-----|----------------------------|-------|----------|-----------|------------|
| C1  | Crush zone 1 at left side  | mm    | 4392     | 4072      | 320        |
| C2  | Crush zone 2 at left side  | mm    | 4495     | 4142      | 353        |
| C3  | Crush zone 3 at left side  | mm    | 4483     | 4121      | 362        |
| C4  | Crush zone 4 at right side | mm    | 4481     | 4072      | 409        |
| C5  | Crush zone 5 at right side | mm    | 4495     | 4131      | 364        |
| C6  | Crush zone 6 at right side | mm    | 4391     | 4092      | 299        |
| L   | C1 TO C6                   | mm    | 1530     | 1447      | 83         |

## DATA SHEET NO. 16

### DUMMY / VEHICLE TEMPERATURE STABILIZATION CHART

Test Vehicle: 2007 Dodge Nitro SLT 4x4  
Test Program: 35mph Frontal Impact

NHTSA No.: M70305  
Test Date: 10/20/2006

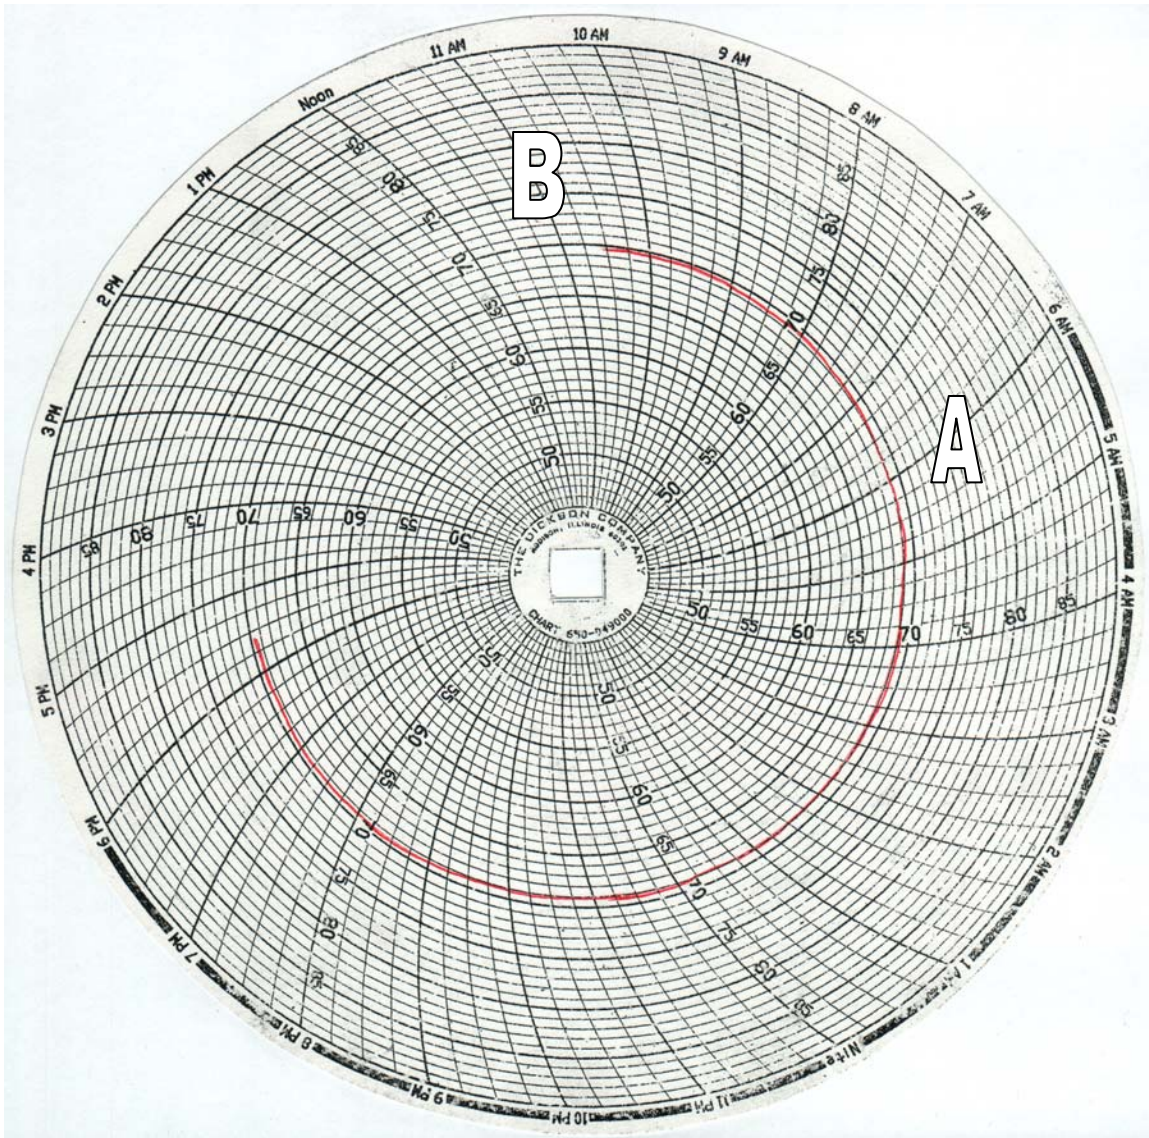

A = Dummies installed in vehicle at 6:00 am

B = Test conducted at 10:40 am

**APPENDIX A**  
**PHOTOGRAPHS**

## TABLE OF PHOTOGRAPHS

### Page No.

|               |                                                               |      |
|---------------|---------------------------------------------------------------|------|
| Photo No. 1.  | Load Cell Location                                            | A-1  |
| Photo No. 2.  | Manufacturer's Label                                          | A-2  |
| Photo No. 3.  | Tire Placard                                                  | A-2  |
| Photo No. 4.  | Left Front $\frac{3}{4}$ View, As Received                    | A-3  |
| Photo No. 5.  | Right Rear $\frac{3}{4}$ View, As Received                    | A-3  |
| Photo No. 6.  | Pre-Test Front View                                           | A-4  |
| Photo No. 7.  | Post-Test Front View                                          | A-4  |
| Photo No. 8.  | Pre-Test Left Side View                                       | A-5  |
| Photo No. 9.  | Post-Test Left Side View                                      | A-5  |
| Photo No. 10. | Pre-Test Right Side View                                      | A-6  |
| Photo No. 11. | Post-Test Right Side View                                     | A-6  |
| Photo No. 12. | Pre-Test Right Front $\frac{3}{4}$ View                       | A-7  |
| Photo No. 13. | Post-Test Right Front $\frac{3}{4}$ View                      | A-7  |
| Photo No. 14. | Pre-Test Left Rear $\frac{3}{4}$ View                         | A-8  |
| Photo No. 15. | Post-Test Left Rear $\frac{3}{4}$ View                        | A-8  |
| Photo No. 16. | Pre-Test Left Side $\frac{3}{4}$ View of Doors                | A-9  |
| Photo No. 17. | Post-Test Left Side $\frac{3}{4}$ View of Doors After Impact  | A-9  |
| Photo No. 18. | Pre-Test Right Side $\frac{3}{4}$ View of Doors               | A-10 |
| Photo No. 19. | Post-Test Right Side $\frac{3}{4}$ View of Doors After Impact | A-10 |
| Photo No. 20. | Pre-Test Windshield View                                      | A-11 |
| Photo No. 21. | Post-Test Windshield View                                     | A-11 |
| Photo No. 22. | Pre-Test Engine Compartment View                              | A-12 |
| Photo No. 23. | Post-Test Engine Compartment View                             | A-12 |
| Photo No. 24. | Pre-Test Fuel Cap View                                        | A-13 |
| Photo No. 25. | Post-Test Fuel Cap View                                       | A-13 |
| Photo No. 26. | Pre-Test Front Underbody View                                 | A-14 |
| Photo No. 27. | Post-Test Front Underbody View                                | A-14 |

Page No.


|               |                                                      |      |
|---------------|------------------------------------------------------|------|
| Photo No. 28. | Pre-Test Mid Front Underbody View                    | A-15 |
| Photo No. 29. | Post-Test Mid Front Underbody View                   | A-15 |
| Photo No. 30. | Pre-Test Mid Rear Underbody View                     | A-16 |
| Photo No. 31. | Post-Test Mid Rear Underbody View                    | A-16 |
| Photo No. 32. | Pre-Test Rear Underbody View                         | A-17 |
| Photo No. 33. | Post-Test Rear Underbody View                        | A-17 |
| Photo No. 34. | Pre-Test Driver Dummy Front View (Head Position)     | A-18 |
| Photo No. 35. | Post-Test Driver Dummy Front View (Head Position)    | A-18 |
| Photo No. 36. | Pre-Test Driver Dummy (Through Window)               | A-19 |
| Photo No. 37. | Post-Test Driver Dummy (Through Window)              | A-19 |
| Photo No. 38. | Pre-Test Driver Dummy (Door Open)                    | A-20 |
| Photo No. 39. | Post-Test Driver Dummy (Door Open)                   | A-20 |
| Photo No. 40. | Pre-Test Driver Dummy Feet                           | A-21 |
| Photo No. 41. | Post-Test Driver Dummy Feet                          | A-21 |
| Photo No. 42. | Pre-Test Driver Side Knee Bolster                    | A-22 |
| Photo No. 43. | Post-Test Driver Side Knee Bolster                   | A-22 |
| Photo No. 44. | Pre-Test Driver Side Floor Pan                       | A-23 |
| Photo No. 45. | Post-Test Driver Side Floor Pan                      | A-23 |
| Photo No. 46. | Post-Test Driver Dummy Head Contact                  | A-24 |
| Photo No. 47. | Post-Test Driver Dummy Left Knee Contact             | A-25 |
| Photo No. 48. | Post-Test Driver Dummy Right Knee Contact            | A-25 |
| Photo No. 49. | Post-Test Driver Dummy Airbag Contact                | A-26 |
| Photo No. 50. | Pre-Test Passenger Dummy Front View (Head Position)  | A-27 |
| Photo No. 51. | Post-Test Passenger Dummy Front View (Head Position) | A-27 |
| Photo No. 52. | Pre-Test Passenger Dummy (Through Window)            | A-28 |
| Photo No. 53. | Post-Test Passenger Dummy (Through Window)           | A-28 |
| Photo No. 54. | Pre-Test Passenger Dummy (Door Open)                 | A-29 |
| Photo No. 55. | Post-Test Passenger Dummy (Door Open)                | A-29 |
| Photo No. 56. | Pre-Test Passenger Dummy Feet                        | A-30 |

Page No.


|               |                                          |      |
|---------------|------------------------------------------|------|
| Photo No. 57. | Post-Test Passenger Dummy Feet           | A-30 |
| Photo No. 58. | Pre-Test Passenger Side Glove Box        | A-31 |
| Photo No. 59. | Post-Test Passenger Side Glove Box       | A-31 |
| Photo No. 60. | Pre-Test Passenger Side Floor Pan        | A-32 |
| Photo No. 61. | Post-Test Passenger Side Floor Pan       | A-32 |
| Photo No. 62. | Post-Test Passenger Dummy Head Contact   | A-33 |
| Photo No. 63. | Post-Test Passenger Dummy Knee Contact   | A-33 |
| Photo No. 64. | Post-Test Passenger Dummy Airbag Contact | A-34 |
| Photo No. 65. | Rollover 90 Degrees                      | A-35 |
| Photo No. 66. | Rollover 180 Degrees                     | A-35 |
| Photo No. 67. | Rollover 270 Degrees                     | A-36 |
| Photo No. 68. | Rollover 360 Degrees                     | A-36 |
| Photo No. 69. | Vehicle Impact                           | A-37 |



Load Cell Location

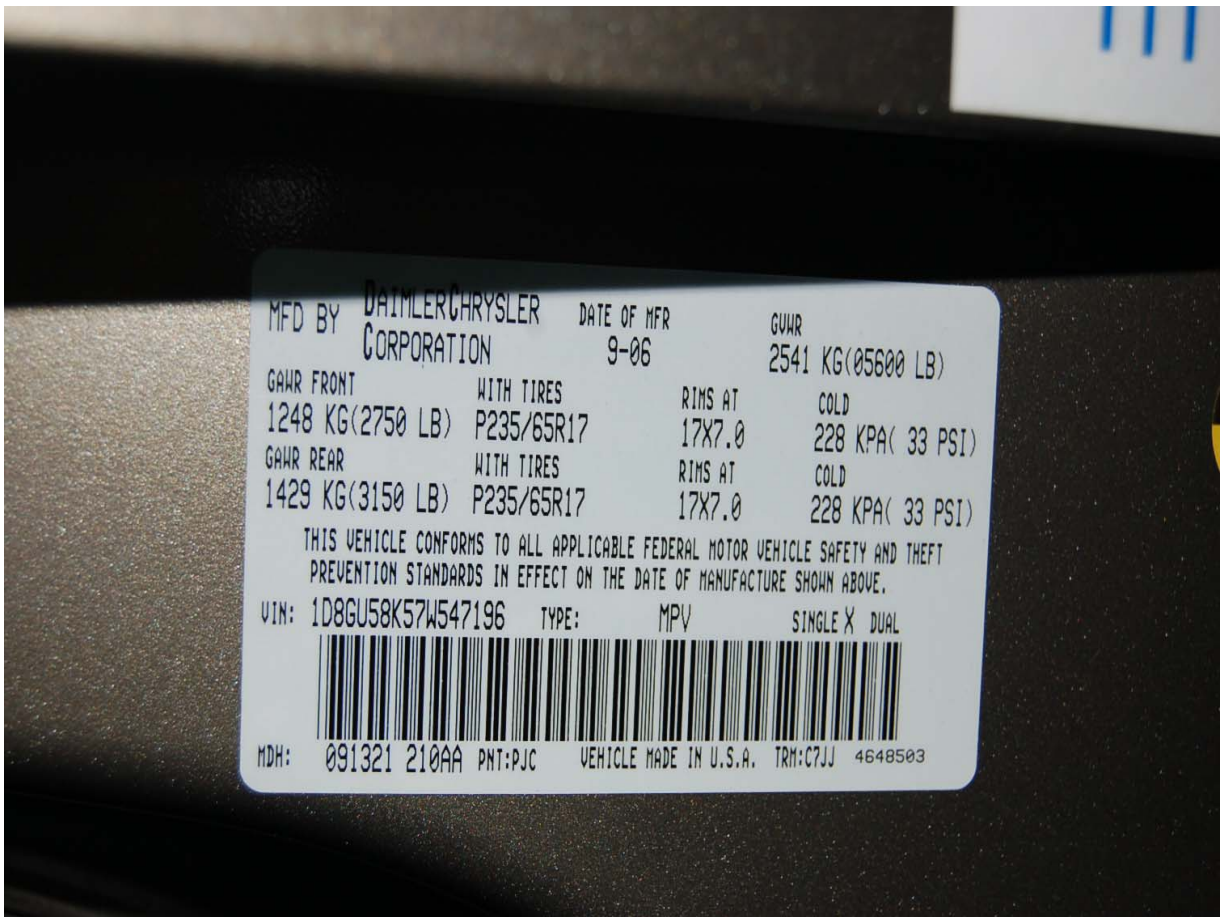

Manufacturer's Label

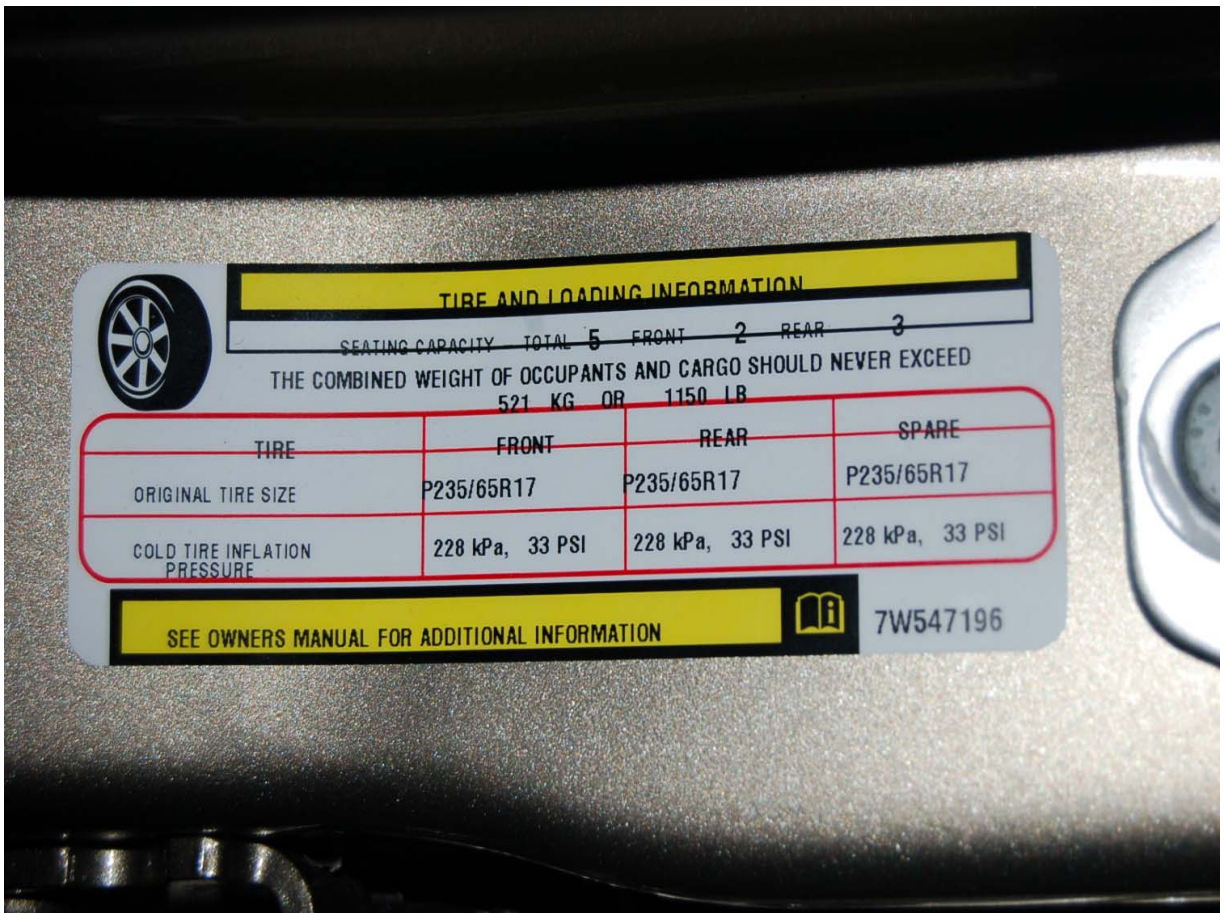

Tire Placard



Left Front  $\frac{3}{4}$  View, As Received



Right Rear  $\frac{3}{4}$  View, As Received



Pre-Test Front View



Post-Test Front View




Pre-Test Left Side View



Post-Test Left Side View



Pre-Test Right Side View

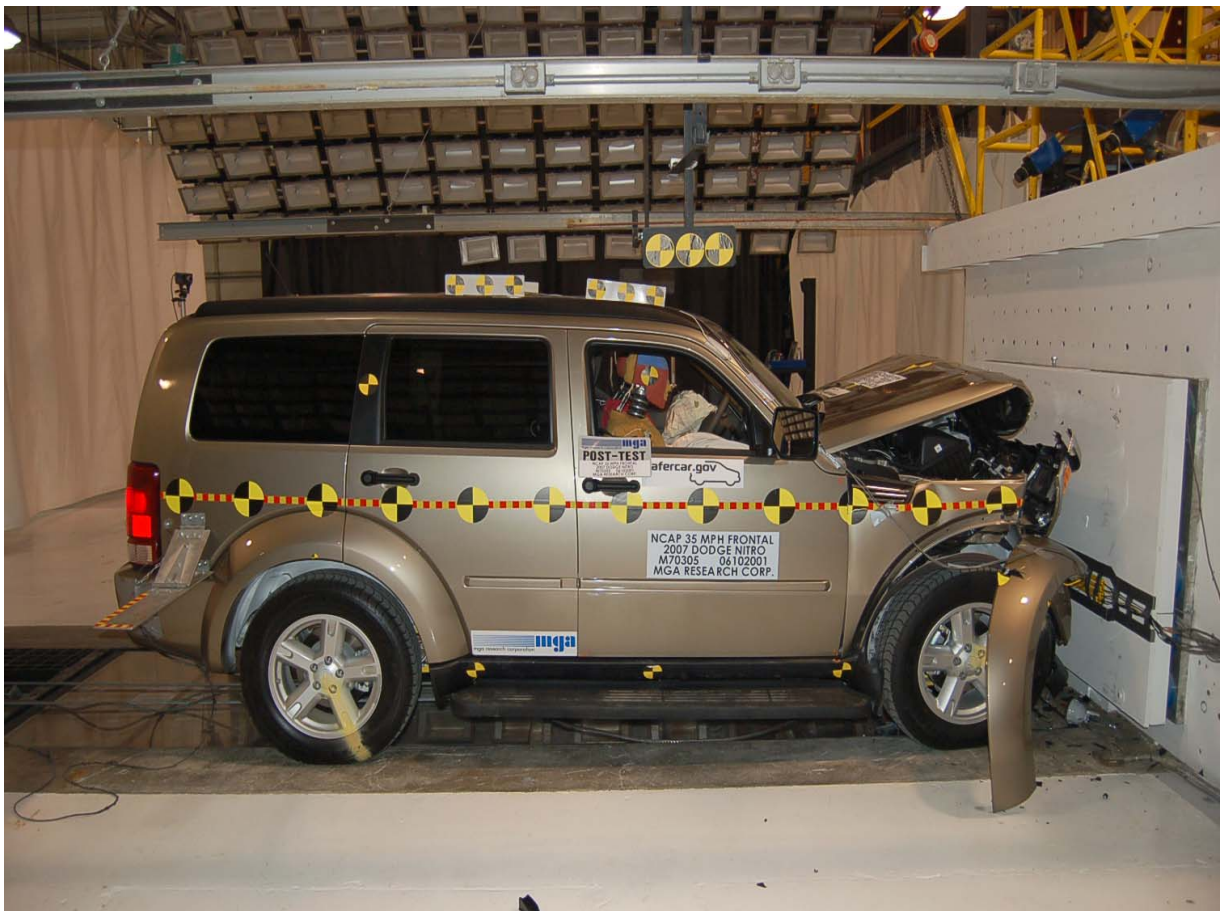

Post-Test Right Side View



Pre-Test Right Front  $\frac{3}{4}$  View



Post-Test Right Front  $\frac{3}{4}$  View



Pre-Test Left Rear  $\frac{3}{4}$  View



Post-Test Left Rear  $\frac{3}{4}$  View



Pre-Test Left Side  $\frac{3}{4}$  View of Doors



Post-Test Left Side  $\frac{3}{4}$  View of Doors After Impact



Pre-Test Right Side  $\frac{3}{4}$  View of Doors



Post-Test Right Side  $\frac{3}{4}$  View of Doors After Impact



Pre-Test Windshield View



Post-Test Windshield View



Pre-Test Engine Compartment View



Post-Test Engine Compartment View



Pre-Test Fuel Cap View



Post-Test Fuel Cap View



Pre-Test Front Underbody View



Post-Test Front Underbody View




Pre-Test Mid Front Underbody View



Post-Test Mid Front Underbody View



Pre-Test Mid Rear Underbody View

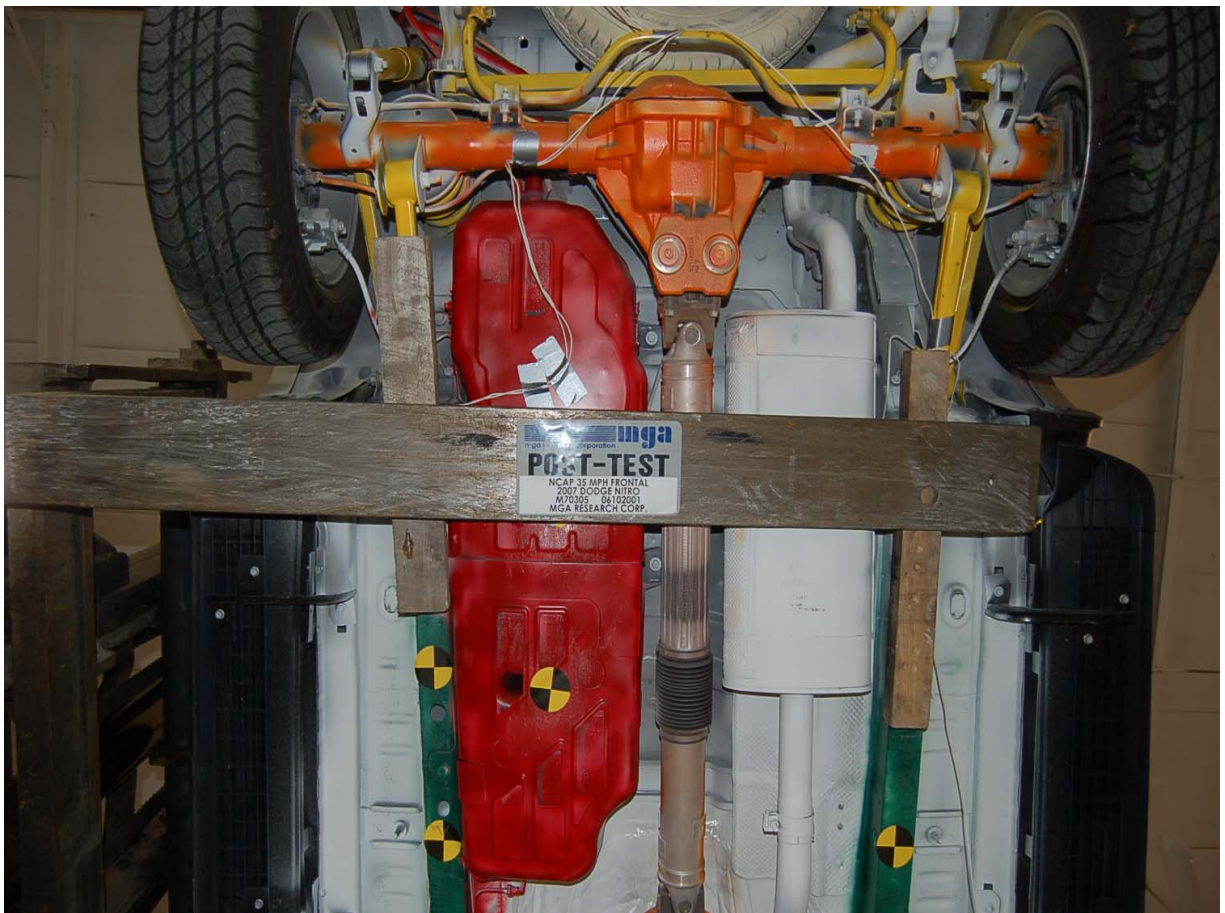

Post-Test Mid Rear Underbody View



Pre-Test Rear Underbody View



Post-Test Rear Underbody View



Pre-Test Driver Dummy Front View (Head Position)



Post-Test Driver Dummy Front View (Head Position)



Pre-Test Driver Dummy (Through Window)



Post-Test Driver Dummy (Through Window)



Pre-Test Driver Dummy (Door Open)




Post-Test Driver Dummy (Door Open)



Pre-Test Driver Dummy Feet



Post-Test Driver Dummy Feet

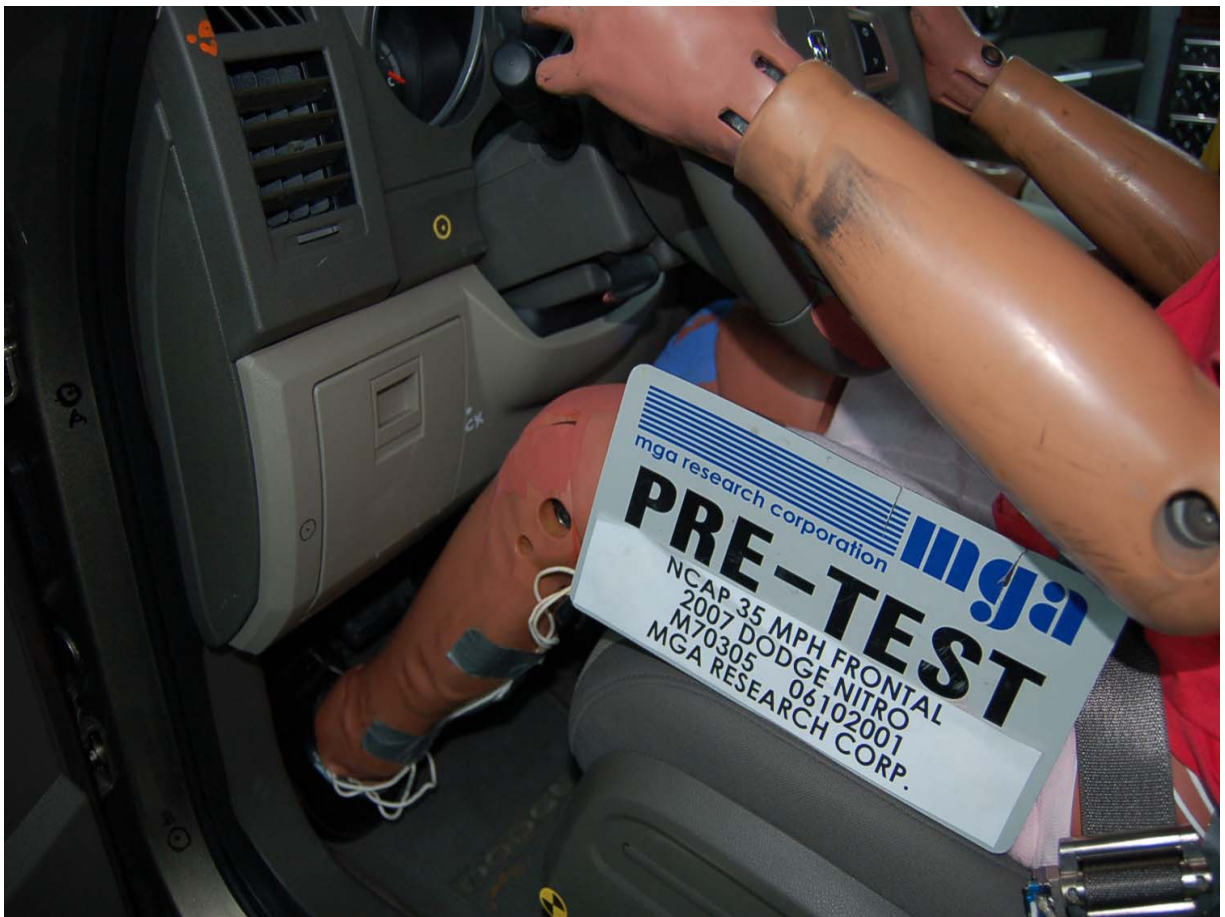

Pre-Test Driver Side Knee Bolster



Post-Test Driver Side Knee Bolster



Pre-Test Driver Side Floor Pan



Post-Test Driver Side Floor Pan



Post-Test Driver Dummy Head Contact



Post-Test Driver Dummy Left Knee Contact



Post-Test Driver Dummy Right Knee Contact



Post-Test Driver Dummy Airbag Contact



Pre-Test Passenger Dummy Front View (Head Position)



Post-Test Passenger Dummy Front View (Head Position)



Pre-Test Passenger Dummy (Through Window)



Post-Test Passenger Dummy (Through Window)



Pre-Test Passenger Dummy (Door Open)




Post-Test Passenger Dummy (Door Open)



Pre-Test Passenger Dummy Feet



Post-Test Passenger Dummy Feet

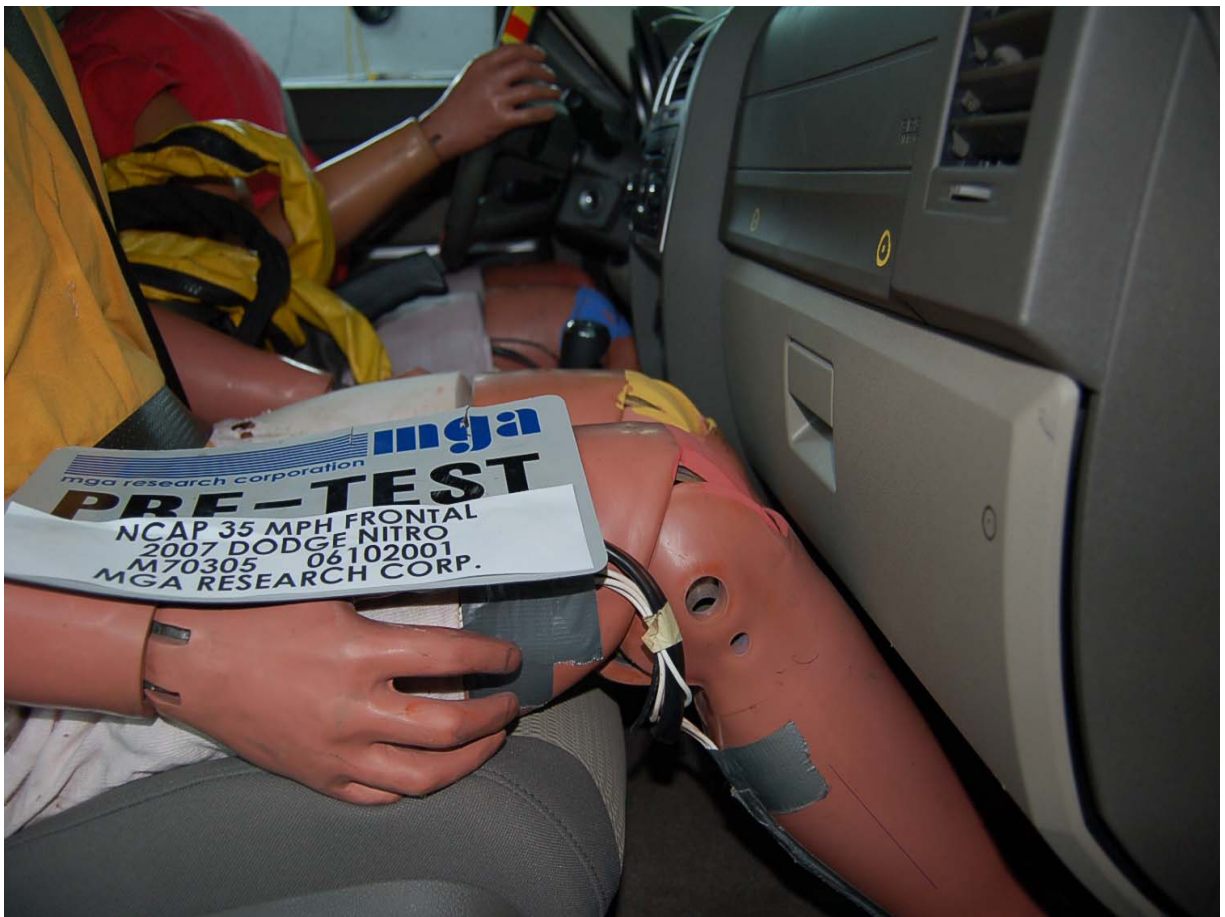

Pre-Test Passenger Side Glove Box



Post-Test Passenger Side Glove Box



Pre-Test Passenger Side Floor Pan



Post-Test Passenger Side Floor Pan



Post-Test Passenger Dummy Head Contact



Post-Test Passenger Dummy Knee Contact



Post-Test Passenger Dummy Airbag Contact



Rollover 90 Degrees



Rollover 180 Degrees



Rollover 270 Degrees



Rollover 360 Degrees



Vehicle Impact

**APPENDIX B**  
**DUMMY RESPONSE DATA TRACES**

## TABLE OF DATA PLOTS

### Page No.

#### **List of Data Plots Provided in the Test Report**

|                |                                                 |     |
|----------------|-------------------------------------------------|-----|
| Figure No. 1.  | Driver Head X Acceleration vs. Time             | B-1 |
| Figure No. 2.  | Driver Head Y Acceleration vs. Time             | B-1 |
| Figure No. 3.  | Driver Head Z Acceleration vs. Time             | B-1 |
| Figure No. 4.  | Driver Head Resultant Acceleration vs. Time     | B-1 |
| Figure No. 5.  | Driver Head X Velocity vs. Time                 | B-2 |
| Figure No. 6.  | Driver Head Y Velocity vs. Time                 | B-2 |
| Figure No. 7.  | Driver Head Z Velocity vs. Time                 | B-2 |
| Figure No. 8.  | Driver Chest X Acceleration vs. Time            | B-3 |
| Figure No. 9.  | Driver Chest Y Acceleration vs. Time            | B-3 |
| Figure No. 10. | Driver Chest Z Acceleration vs. Time            | B-3 |
| Figure No. 11. | Driver Chest Resultant Acceleration vs. Time    | B-3 |
| Figure No. 12. | Driver Chest X Velocity vs. Time                | B-4 |
| Figure No. 13. | Driver Chest Y Velocity vs. Time                | B-4 |
| Figure No. 14. | Driver Chest Z Velocity vs. Time                | B-4 |
| Figure No. 15. | Driver Left Femur Force vs. Time                | B-5 |
| Figure No. 16. | Driver Right Femur Force vs. Time               | B-5 |
| Figure No. 17. | Passenger Head X Acceleration vs. Time          | B-6 |
| Figure No. 18. | Passenger Head Y Acceleration vs. Time          | B-6 |
| Figure No. 19. | Passenger Head Z Acceleration vs. Time          | B-6 |
| Figure No. 20. | Passenger Head Resultant Acceleration vs. Time  | B-6 |
| Figure No. 21. | Passenger Head X Velocity vs. Time              | B-7 |
| Figure No. 22. | Passenger Head Y Velocity vs. Time              | B-7 |
| Figure No. 23. | Passenger Head Z Velocity vs. Time              | B-7 |
| Figure No. 24. | Passenger Chest X Acceleration vs. Time         | B-8 |
| Figure No. 25. | Passenger Chest Y Acceleration vs. Time         | B-8 |
| Figure No. 26. | Passenger Chest Z Acceleration vs. Time         | B-8 |
| Figure No. 27. | Passenger Chest Resultant Acceleration vs. Time | B-8 |
| Figure No. 28. | Passenger Chest X Velocity vs. Time             | B-9 |

|                |                                      |      |
|----------------|--------------------------------------|------|
| Figure No. 29. | Passenger Chest Y Velocity vs. Time  | B-9  |
| Figure No. 30. | Passenger Chest Z Velocity vs. Time  | B-9  |
| Figure No. 31. | Passenger Left Femur Force vs. Time  | B-10 |
| Figure No. 32. | Passenger Right Femur Force vs. Time | B-10 |

**The following dummy and vehicle response data can be found in the R&D section of the NHTSA website at [www.nhtsa.dot.gov](http://www.nhtsa.dot.gov)**

Driver Head X Redundant

Driver Head Y Redundant

Driver Head Z Redundant

Driver Upper Neck Force X

Driver Upper Neck Force Y

Driver Upper Neck Force Z

Driver Upper Neck Moment X

Driver Upper Neck Moment Y

Driver Upper Neck Moment Z

Driver Chest X Redundant

Driver Chest Y Redundant

Driver Chest Z Redundant

Driver Chest Displacement

Driver Pelvis X

Driver Pelvis Y

Driver Pelvis Z

Driver Shoulder Belt Force

Driver Lap Belt Force

Driver Left Upper Tibia Moment X

Driver Left Upper Tibia Moment Y

Driver Left Upper Tibia Force Z

Driver Left Lower Tibia Moment X

Driver Left Lower Tibia Moment Y





Driver Left Lower Tibia Force Z




Driver Right Upper Tibia Moment X





Driver Right Upper Tibia Moment Y




Driver Right Upper Tibia Force Z  
Driver Right Lower Tibia Moment X  
Driver Right Lower Tibia Moment Y  
Driver Right Lower Tibia Force Z  
Driver Left Foot Fore Z  
Driver Left Foot Aft X  
Driver Left Foot Aft Z  
Driver Right Foot Fore Z  
Driver Right Foot Aft X  
Driver Right Foot Aft Z  
Passenger Head X Redundant  
Passenger Head Y Redundant  
Passenger Head Z Redundant  
Passenger Upper Neck Force X  
Passenger Upper Neck Force Y  
Passenger Upper Neck Force Z  
Passenger Upper Neck Moment X  
Passenger Upper Neck Moment Y  
Passenger Upper Neck Moment Z  
Passenger Chest X Redundant  
Passenger Chest Y Redundant  
Passenger Chest Z Redundant  
Passenger Chest Displacement  
Passenger Pelvis X  
Passenger Pelvis Y  
Passenger Pelvis Z  
Passenger Shoulder Belt Force  
Passenger Lap Belt Force  
Passenger Left Upper Tibia Moment X  
Passenger Left Upper Tibia Moment Y  
Passenger Left Upper Tibia Force Z  
Passenger Left Lower Tibia Moment X



Passenger Left Lower Tibia Moment Y  
Passenger Left Lower Tibia Force Z  
Passenger Right Upper Tibia Moment X  
Passenger Right Upper Tibia Moment Y  
Passenger Right Upper Tibia Force Z  
Passenger Right Lower Tibia Moment X  
Passenger Right Lower Tibia Moment Y  
Passenger Right Lower Tibia Force Z  
Passenger Left Foot Fore Z  
Passenger Left Foot Aft X  
Passenger Left Foot Aft Z  
Passenger Right Foot Fore Z  
Passenger Right Foot Aft X  
Passenger Right Foot Aft Z  
Left Rear Seat Crossmember X  
Left Rear Seat Crossmember Z  
Right Rear Seat Crossmember X  
Right Rear Seat Crossmember Z  
Vehicle Engine Top X  
Vehicle Engine Bottom X  
Vehicle Left Brake Caliper X  
Vehicle Right Brake Caliper X

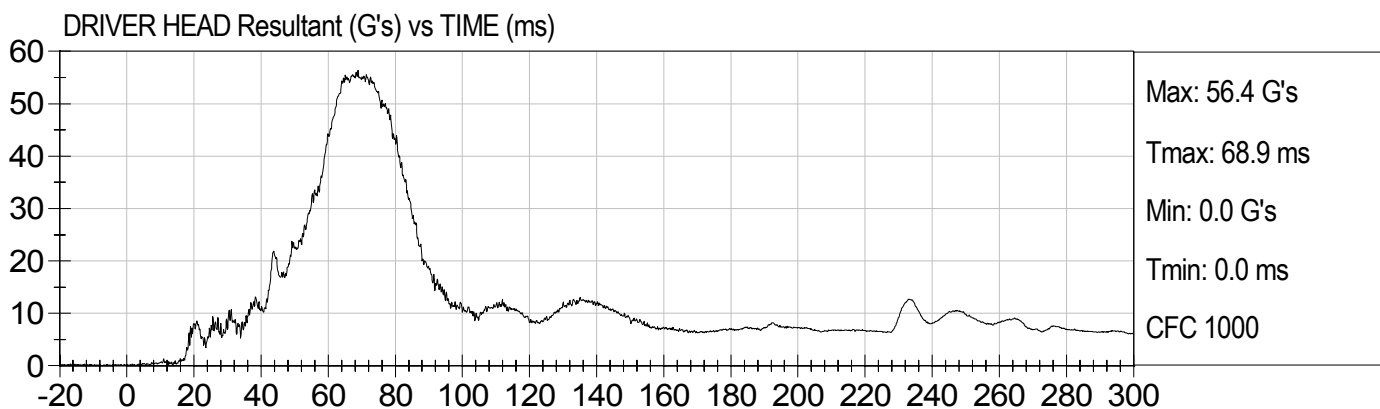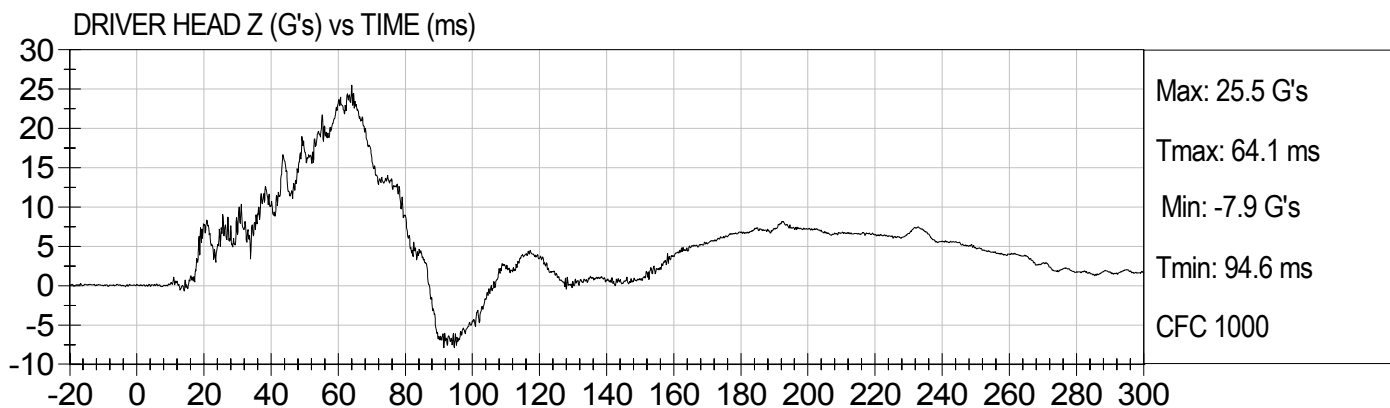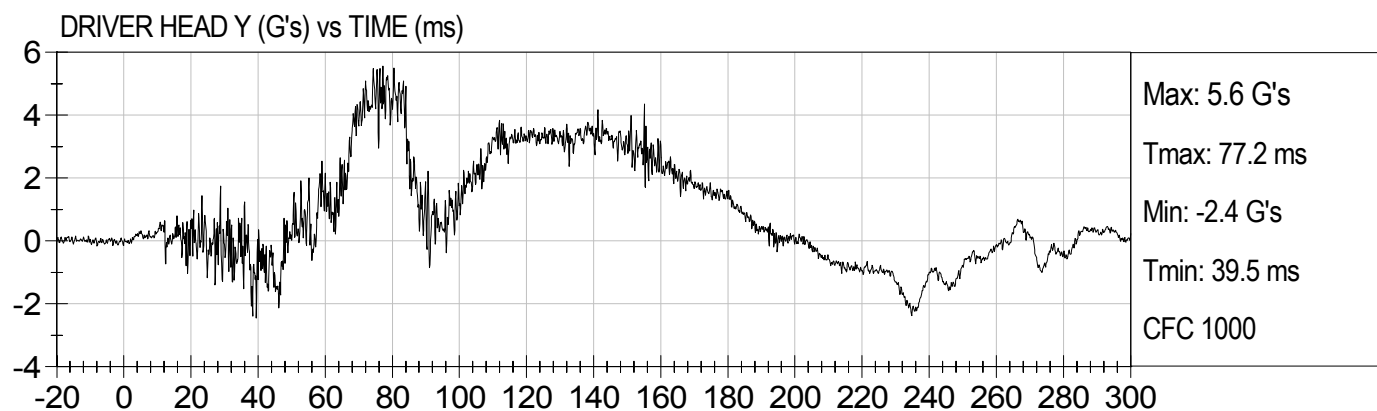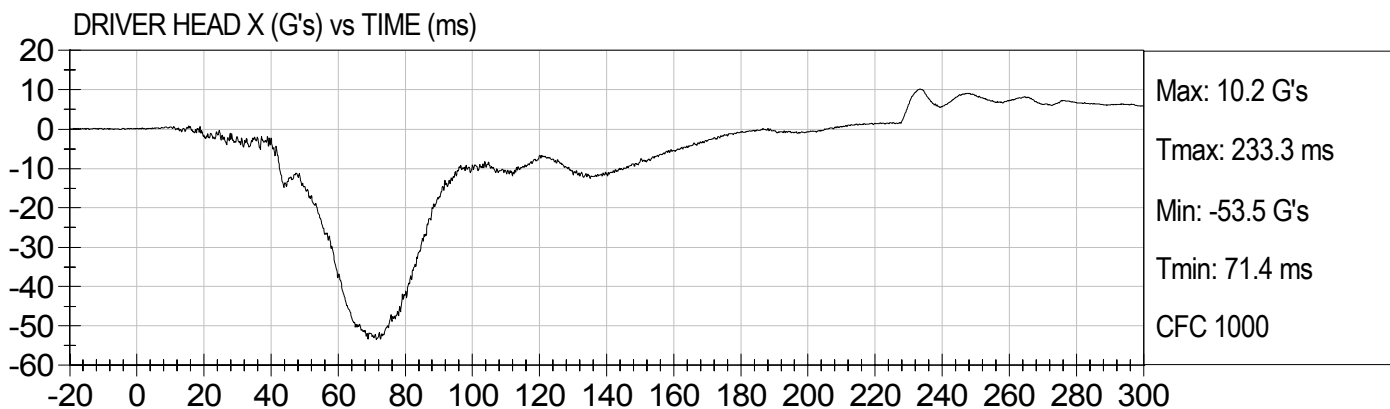

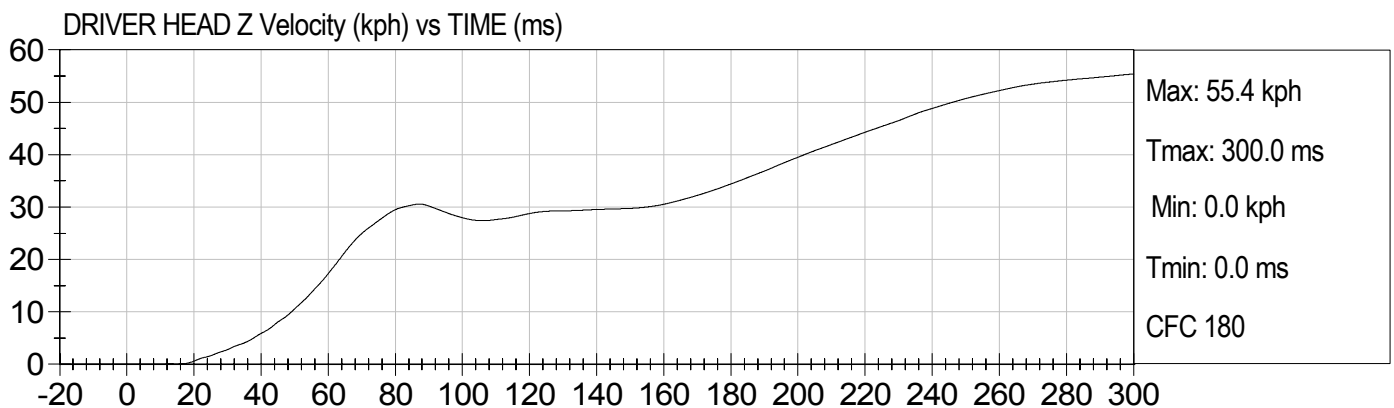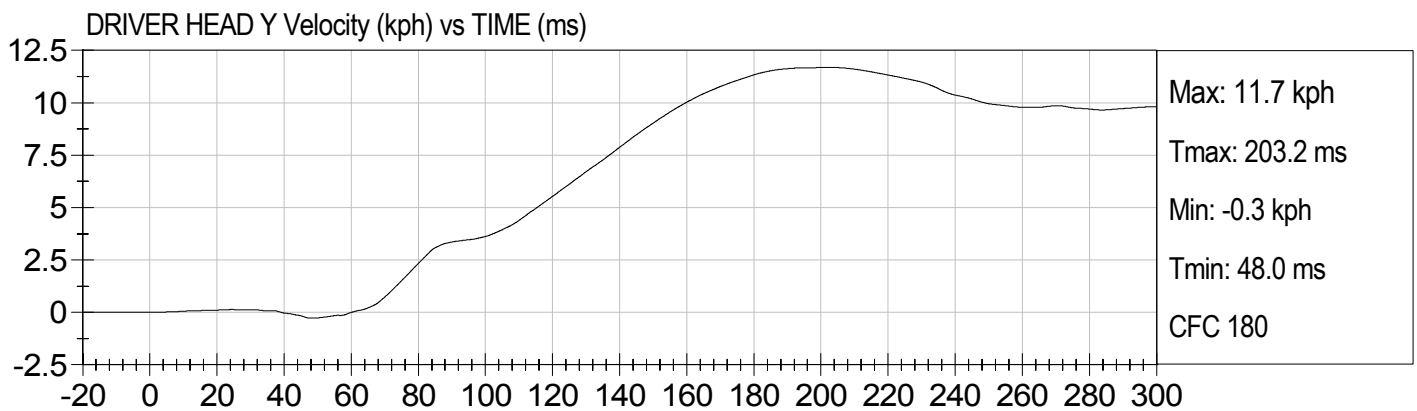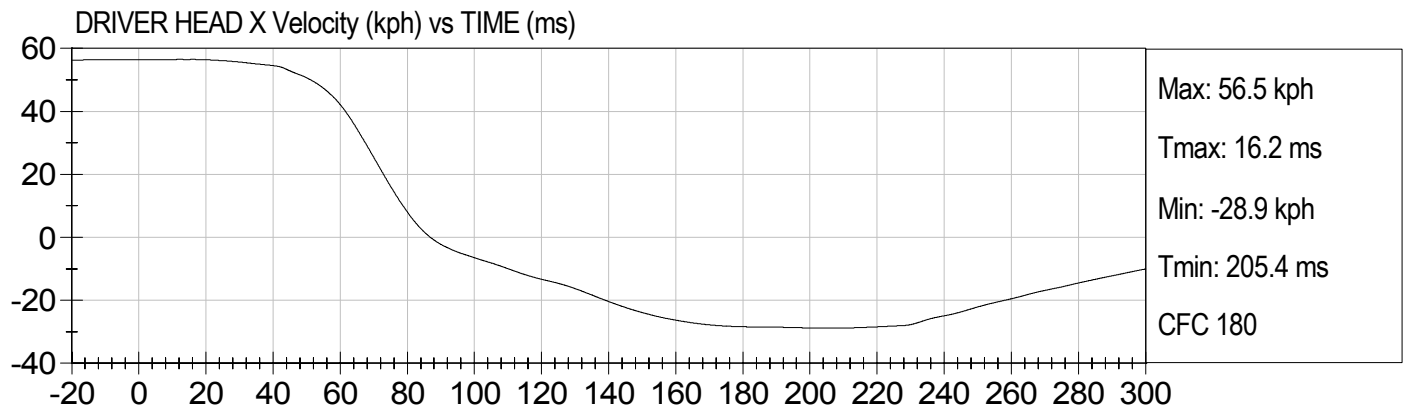

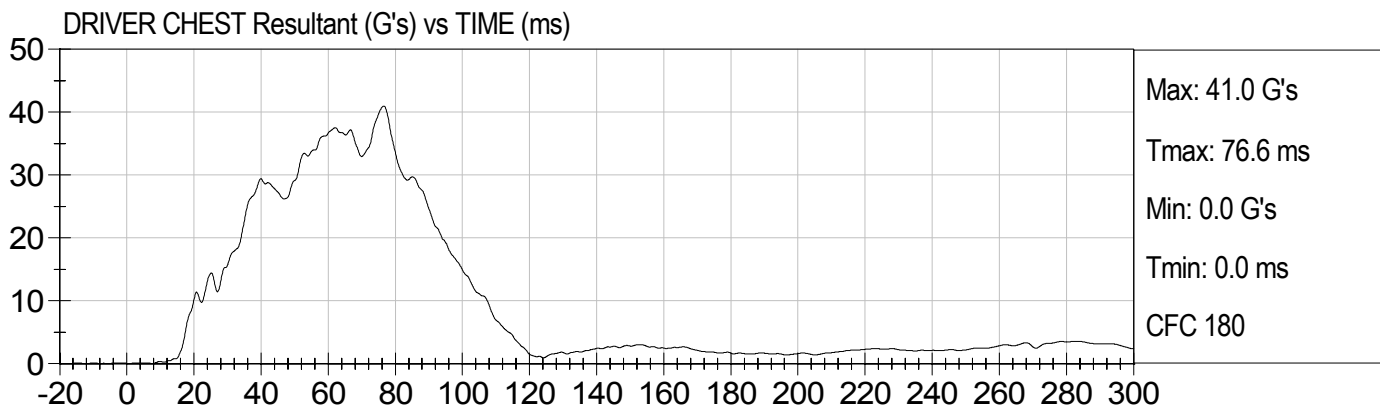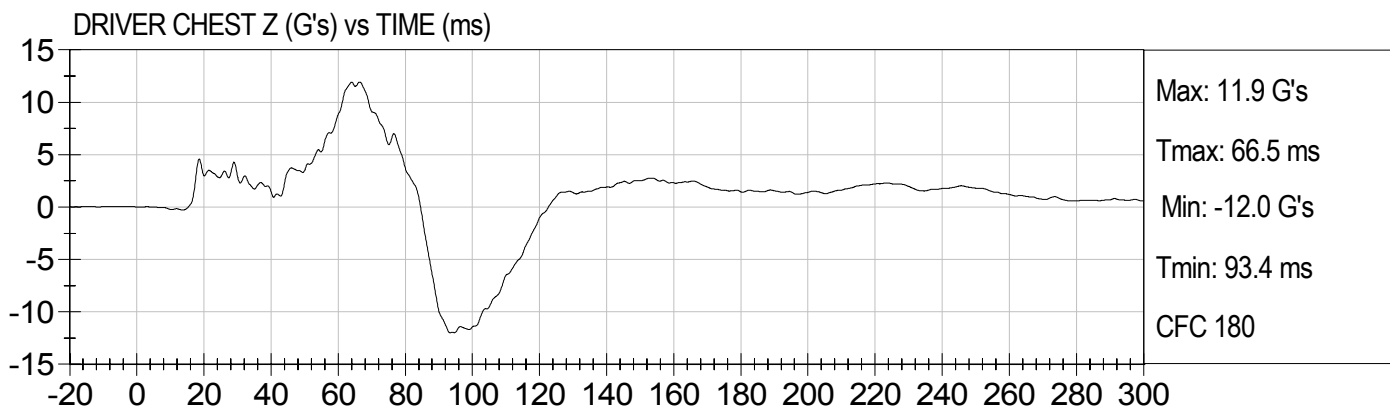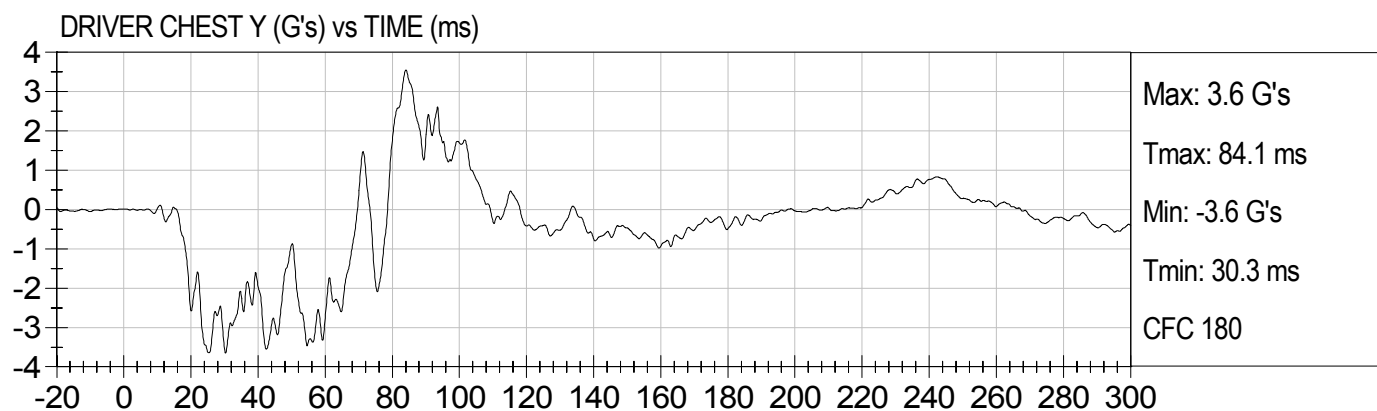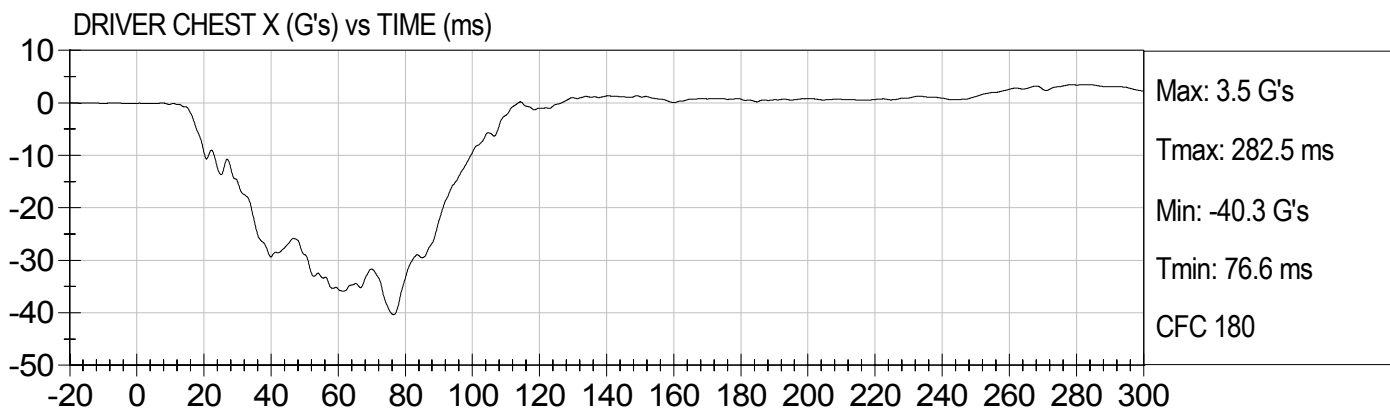


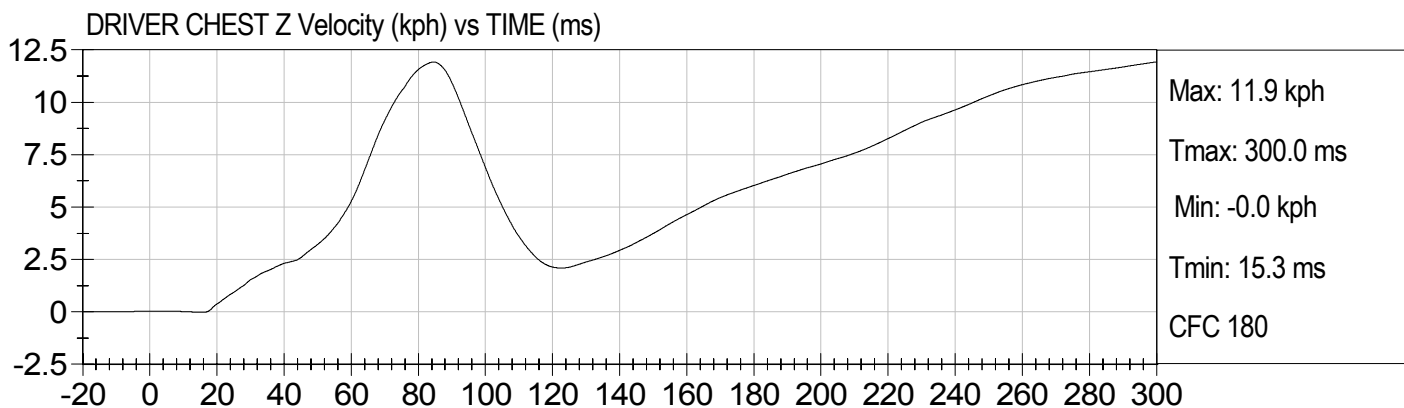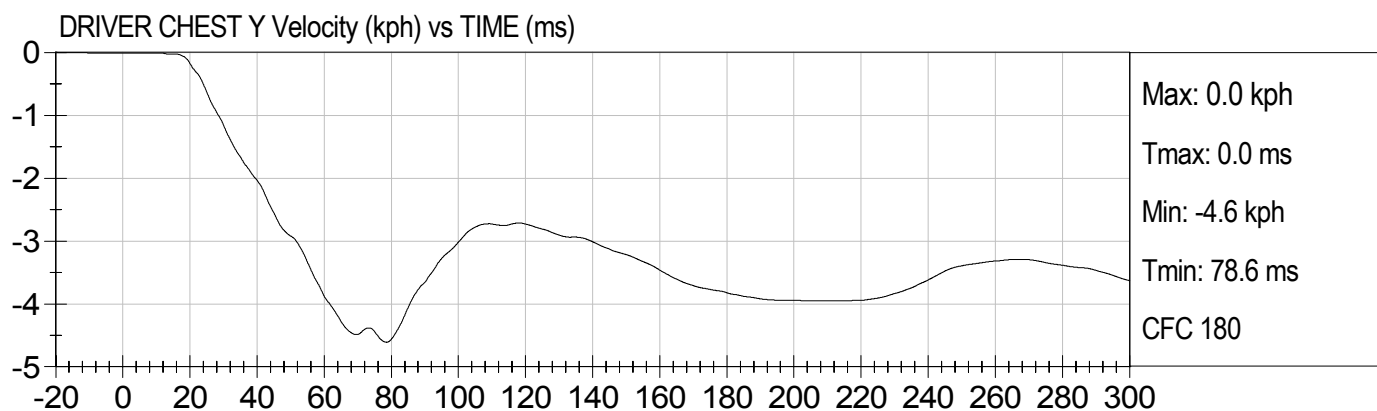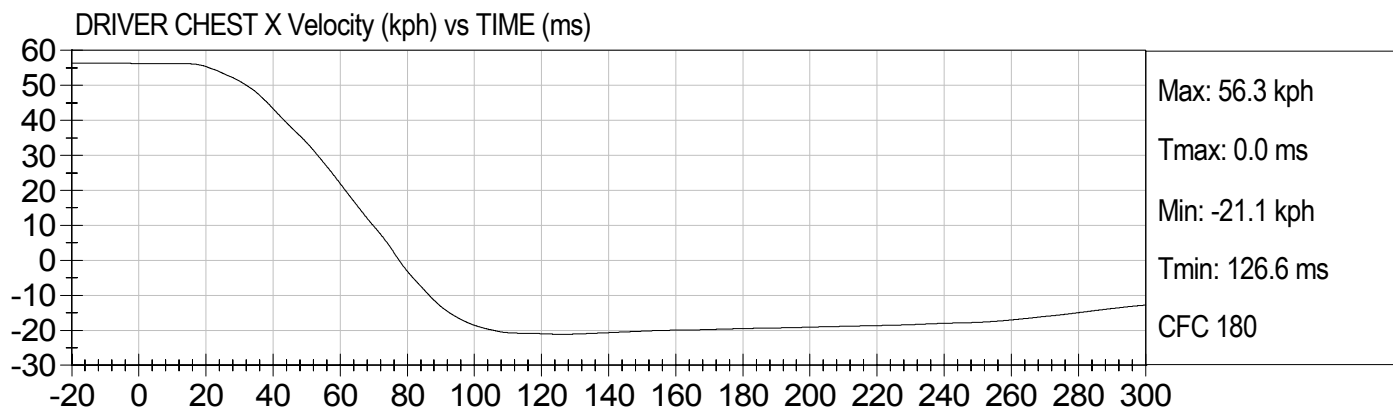

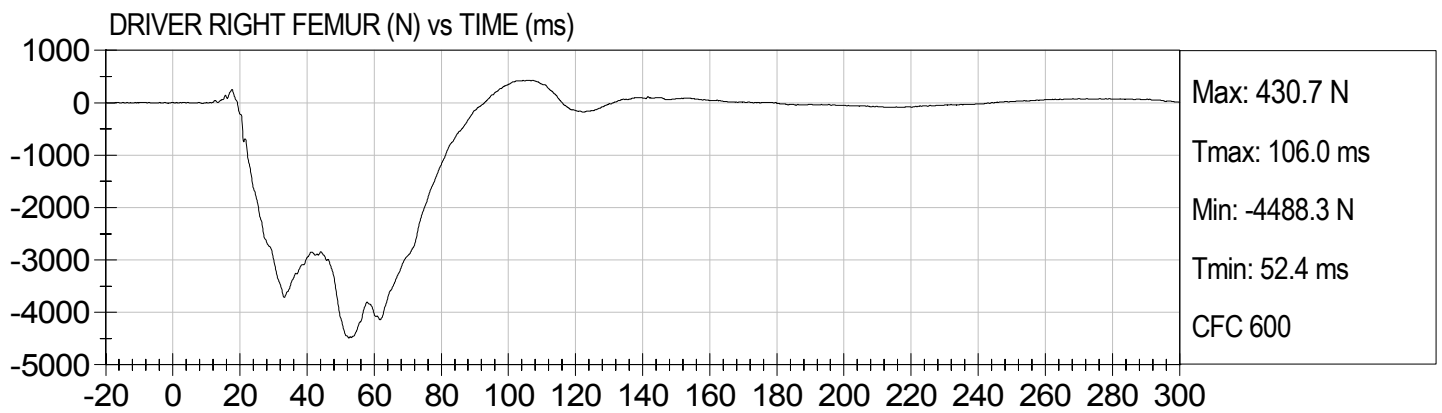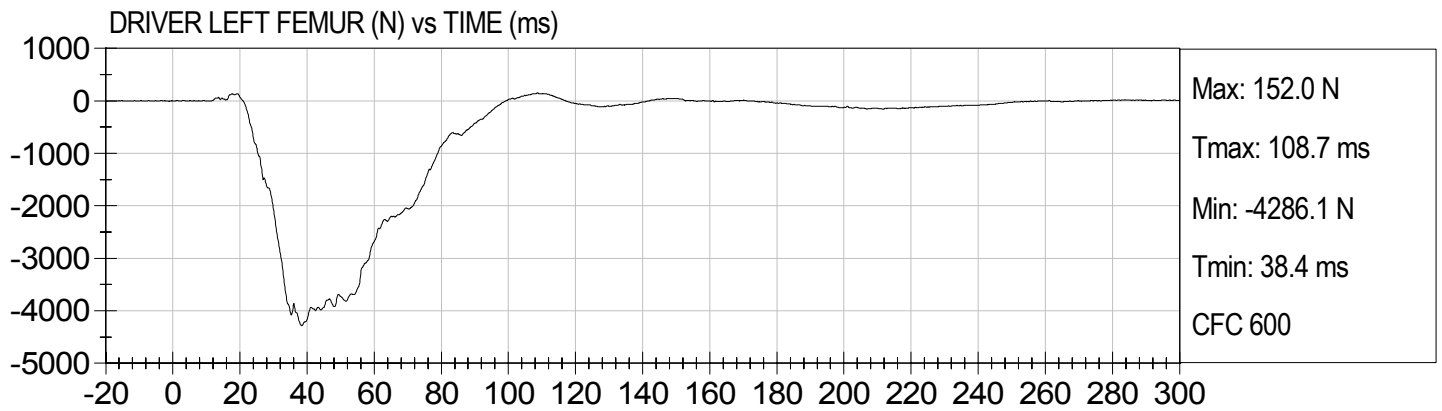




PASSENGER HEAD X (G's) vs TIME (ms)

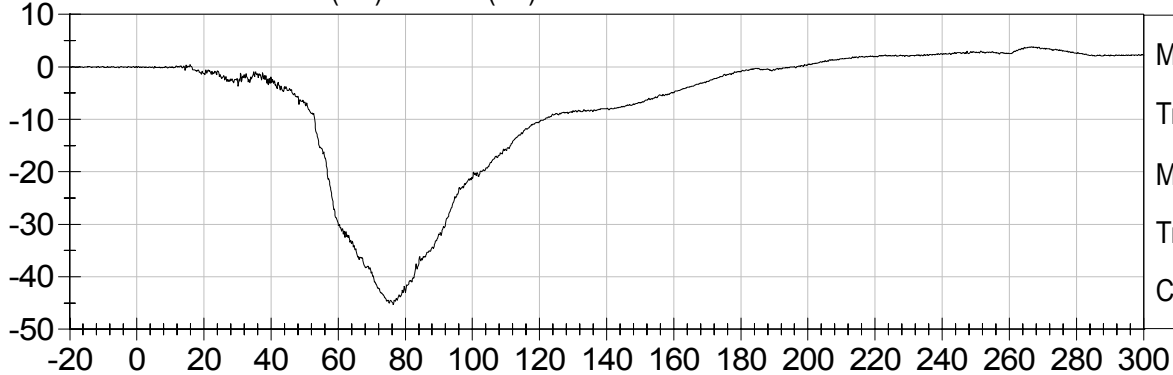

Max: 3.8 G's  
Tmax: 266.2 ms  
Min: -45.3 G's  
Tmin: 76.4 ms  
CFC 1000

PASSENGER HEAD Y (G's) vs TIME (ms)

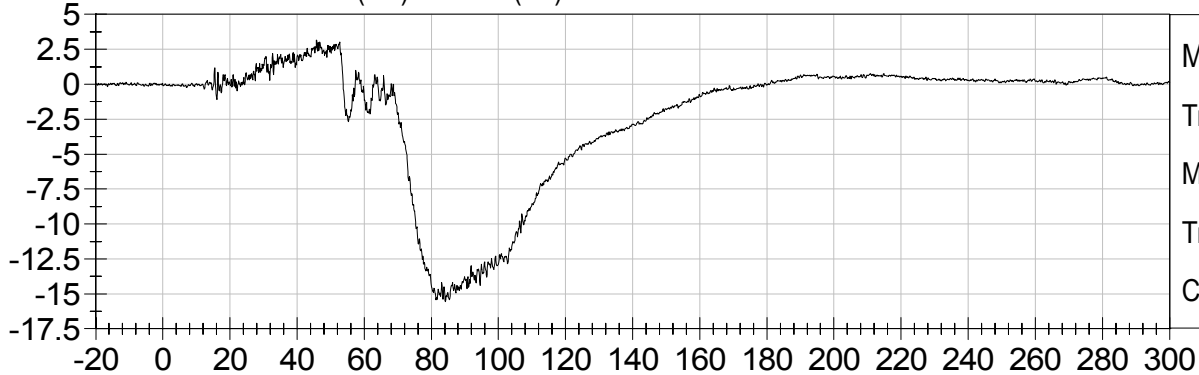


Max: 3.2 G's  
Tmax: 45.8 ms  
Min: -15.5 G's  
Tmin: 84.2 ms  
CFC 1000

PASSENGER HEAD Z (G's) vs TIME (ms)










Max: 20.1 G's  
Tmax: 51.7 ms  
Min: -0.8 G's  
Tmin: 141.6 ms  
CFC 1000




PASSENGER HEAD Resultant (G's) vs TIME (ms)


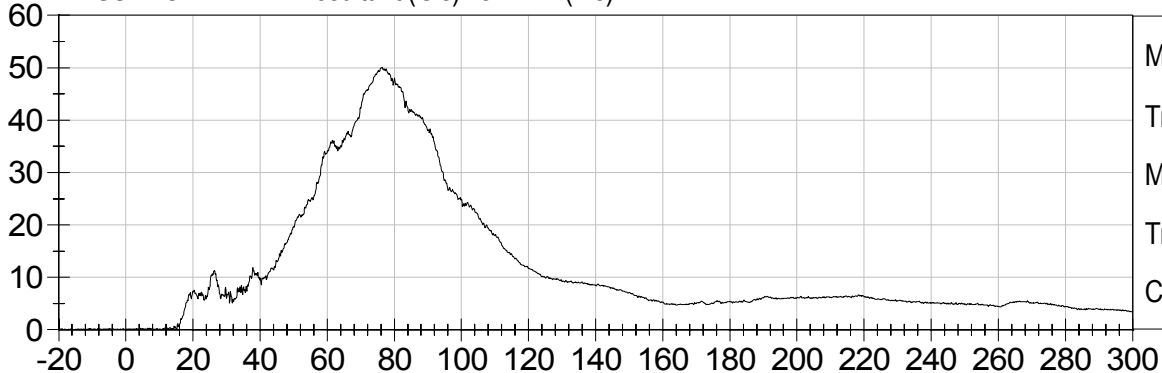


Max: 50.0 G's  
Tmax: 76.4 ms  
Min: 0.0 G's  
Tmin: 0.0 ms  
CFC 1000

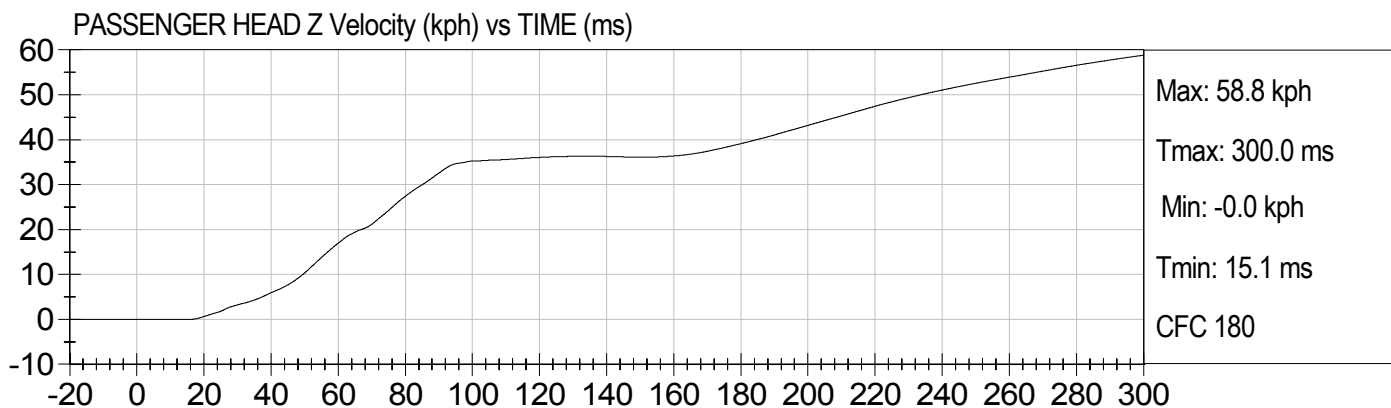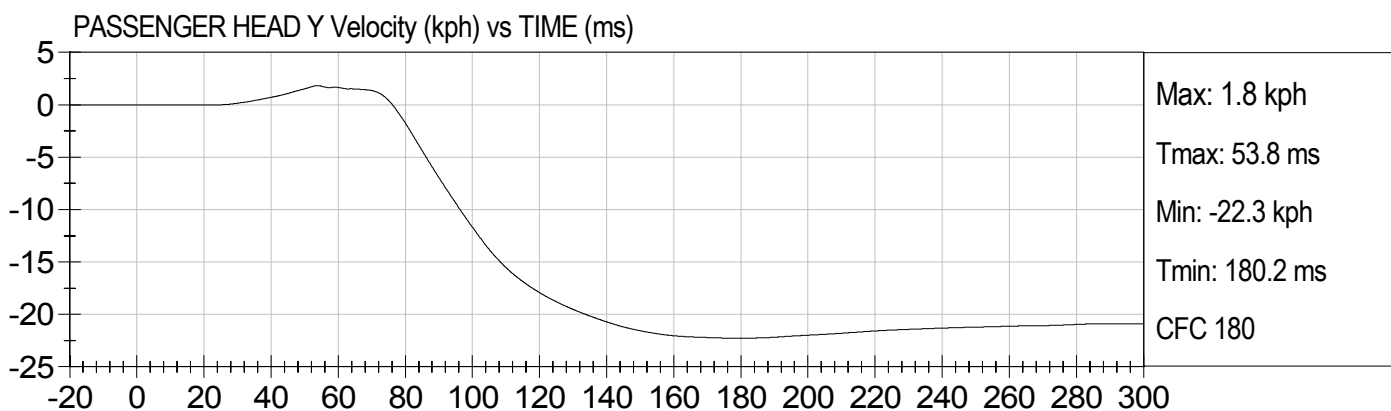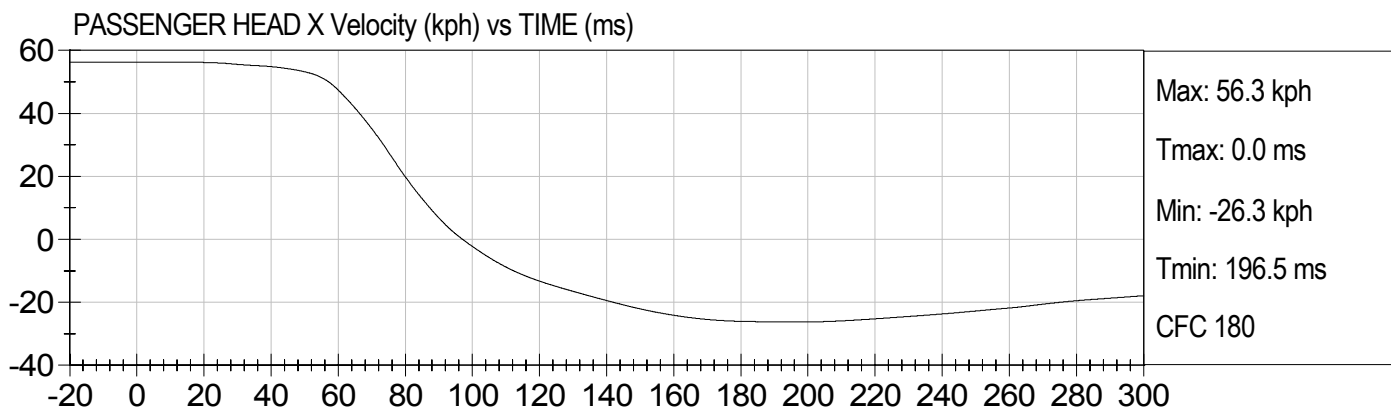

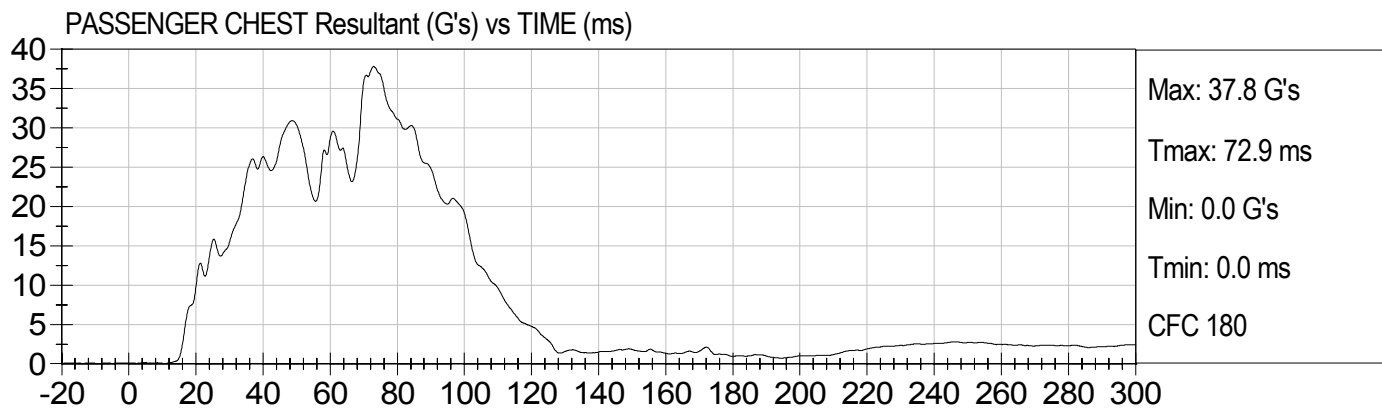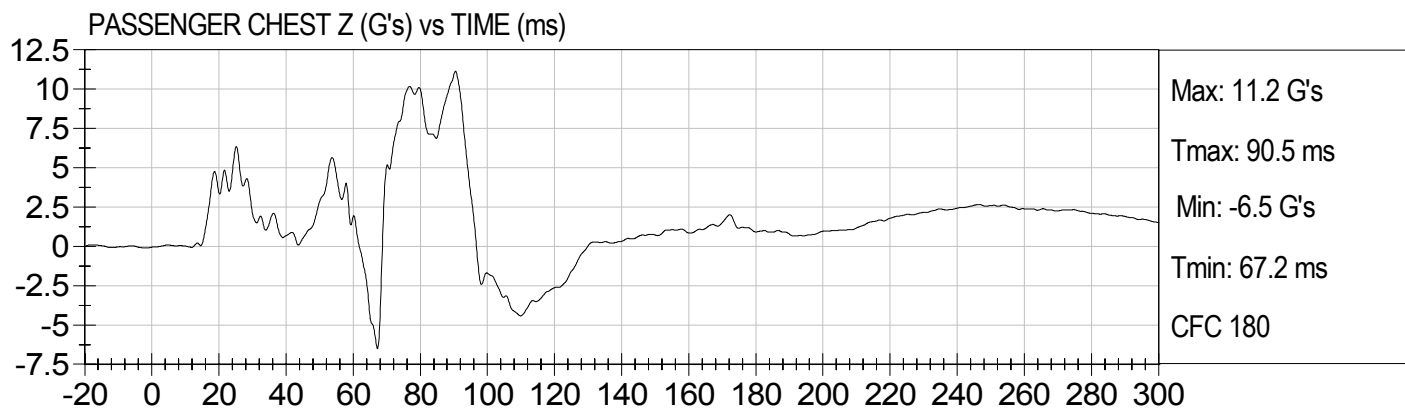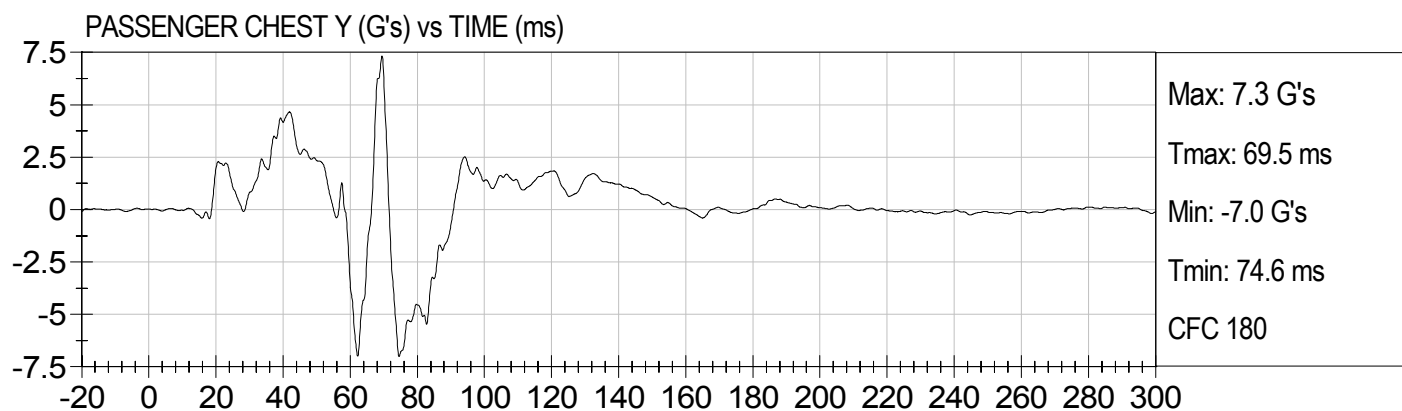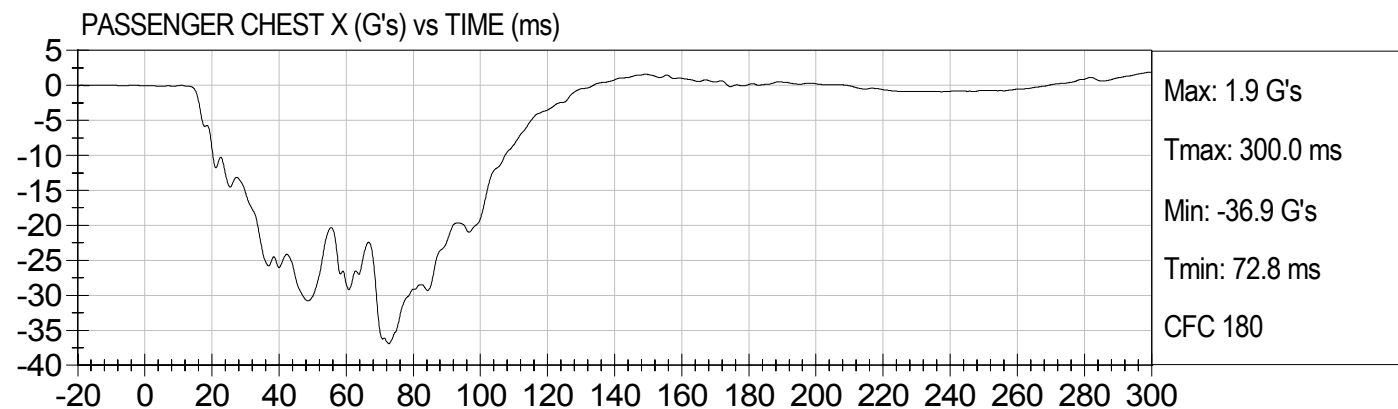

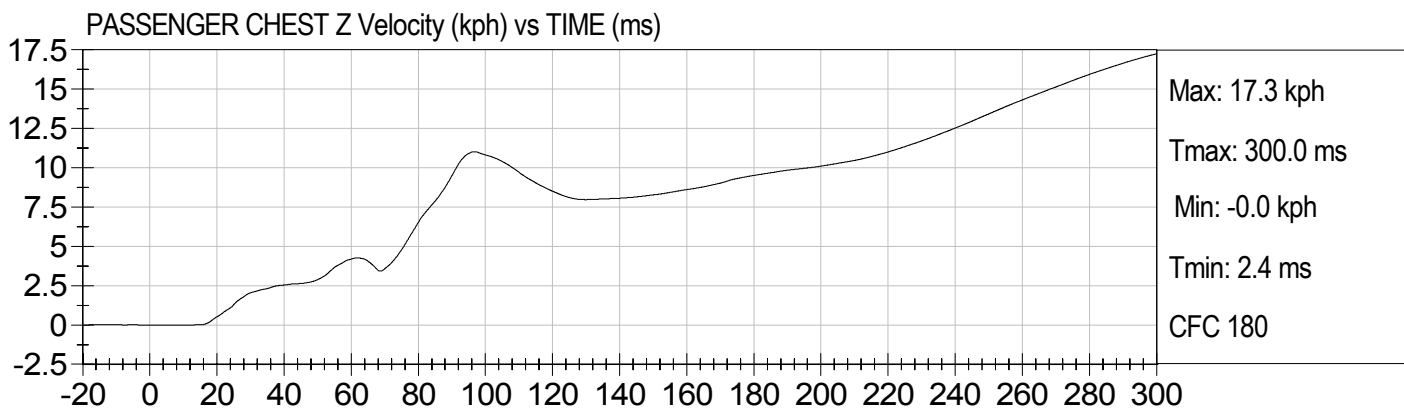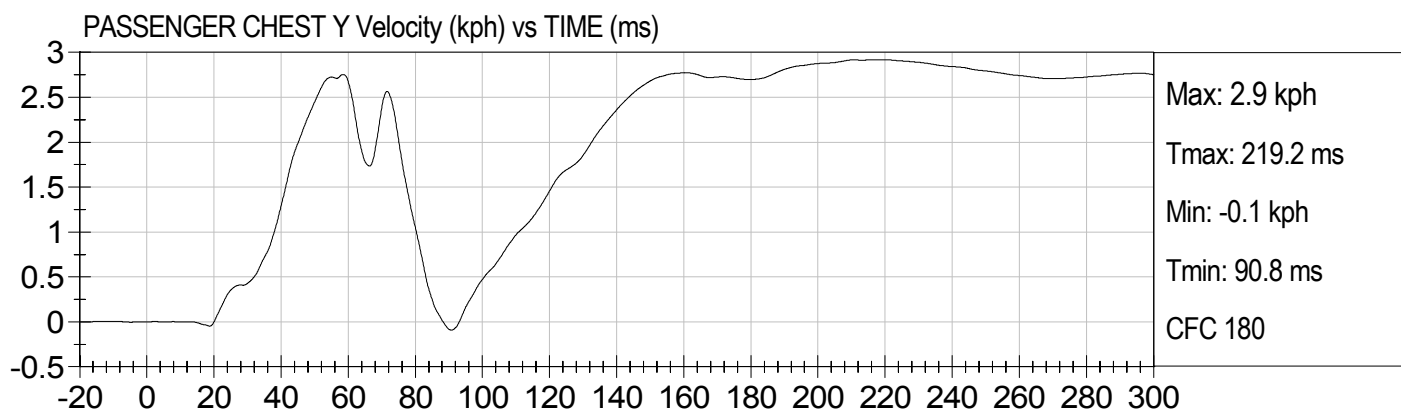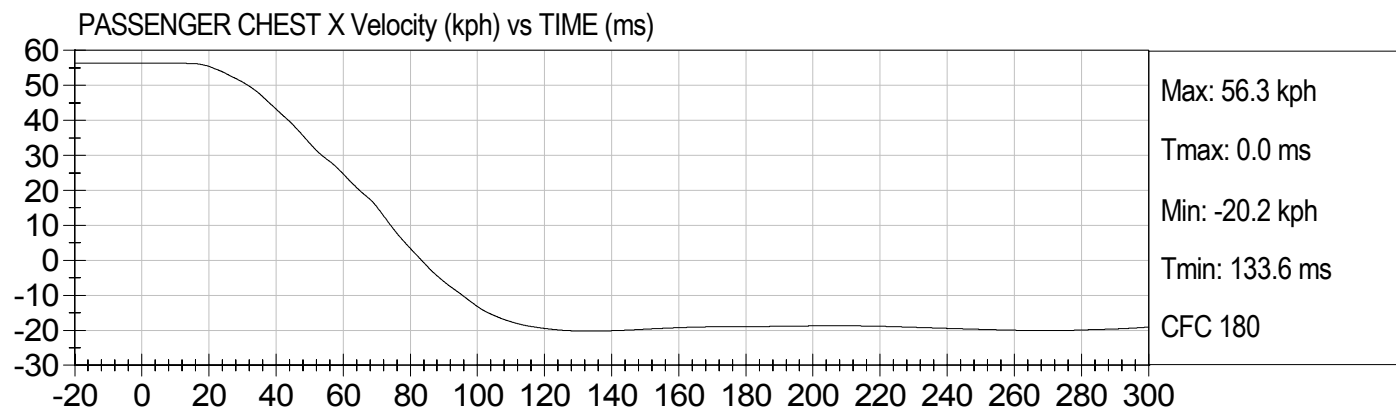

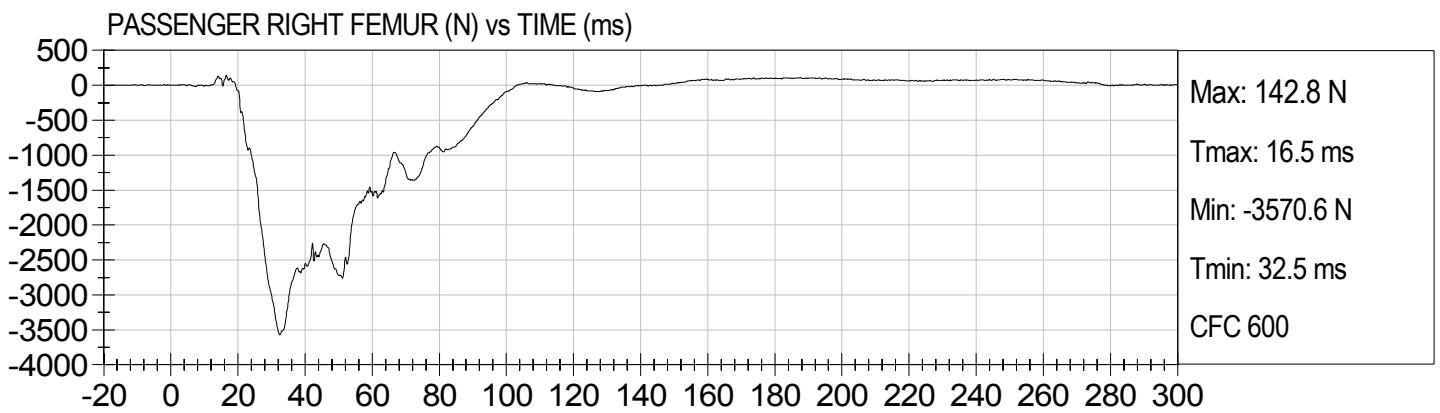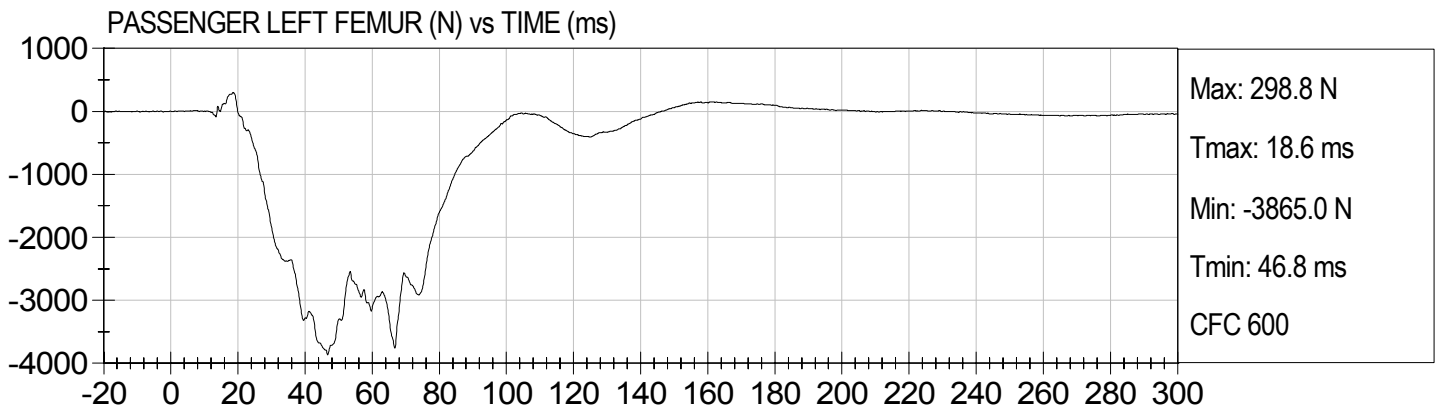

**APPENDIX C**  
**DUMMY CALIBRATION DATA**

**MGA RESEARCH CORPORATION**  
**HEAD DROP TEST**  
**HYBRID III 50TH PERCENTILE MALE**

**ATD Serial No:** 065

**Test ID:** D062691

| Tested Parameter             | Units | Specification      | Result | Pass/Fail |
|------------------------------|-------|--------------------|--------|-----------|
| Laboratory Temperature       | deg C | 18.9 - 25.6        | 21.3   | Pass      |
| Laboratory Relative Humidity | %     | 10 to 70           | 40     | Pass      |
| Peak Resultant Acceleration  | G's   | 225 - 275          | 254    | Pass      |
| Peak Lateral Acceleration    | G's   | <= +/- 15.0        | -14.2  | Pass      |
| Unimodal                     | N/A   | Yes                | Yes    | Pass      |
| Oscillations                 | N/A   | within 10% of peak | Yes    | Pass      |
| Overall Test Results         |       |                    |        | Pass      |

  
Laboratory Technician

  
Approved By


09/07/2006  
Test Date




Test Desc: Head Drop  
Componet ID: D062691

Test Date: 09/07/2006  
Velocity: 0 ft/s, 0.00 m/s

HEAD RESULTANT ACCELERATION (G'S) vs TIME (ms)

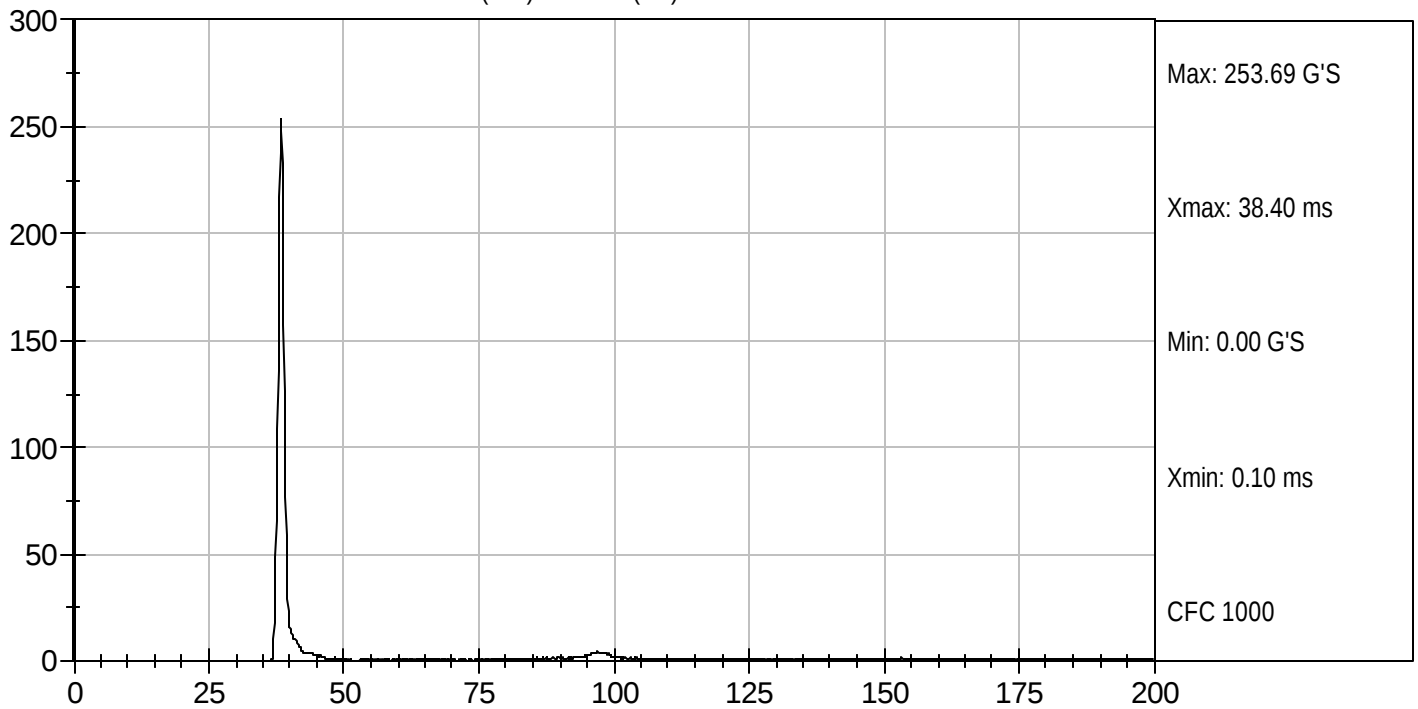

HEAD Y (G's) vs TIME (ms)

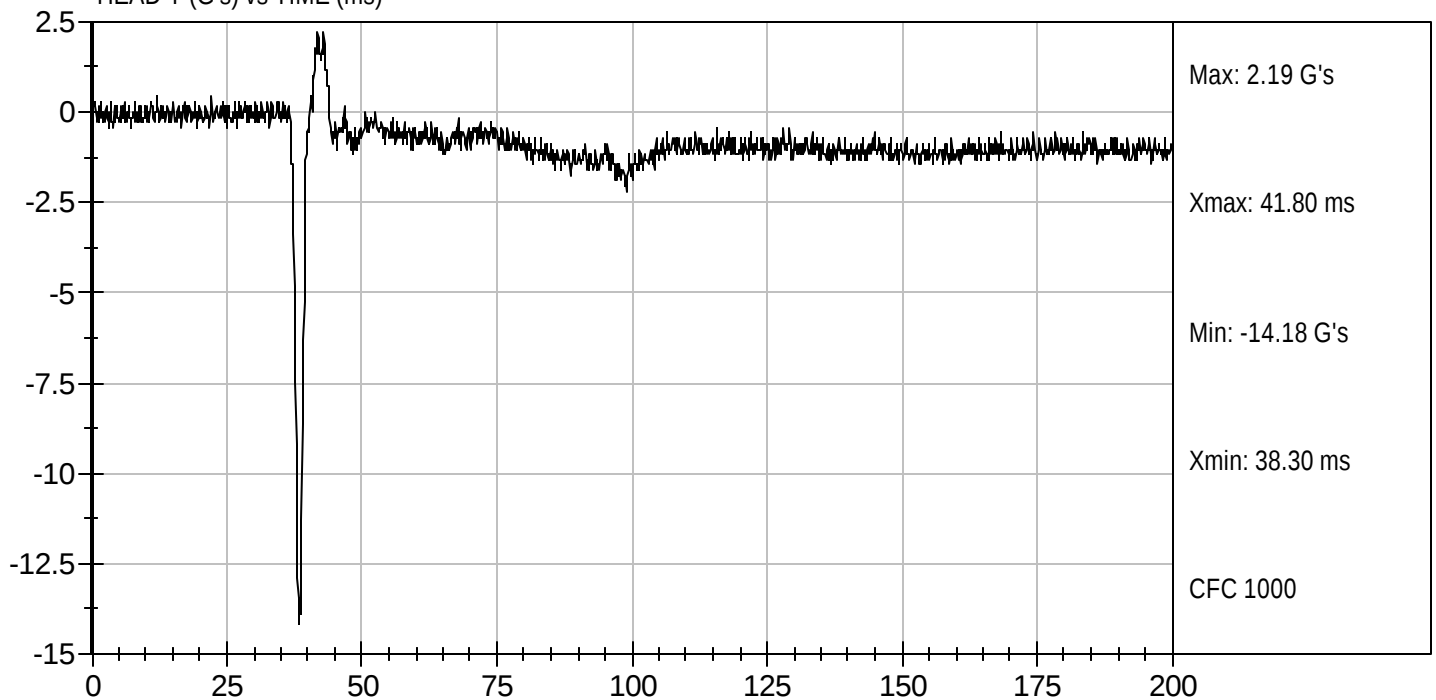

**MGA RESEARCH CORPORATION**  
**NECK FLEXION TEST**  
**HYBRID III 50TH PERCENTILE MALE**

**ATD Serial No:** 065

**Test I.D:** D062692

| Tested Parameter                               |         | Units   | Specification  | Result | Pass/Fail |
|------------------------------------------------|---------|---------|----------------|--------|-----------|
| Laboratory Temperature                         |         | deg C   | 20.6 to 22.2   | 21.2   | Pass      |
| Laboratory Relative Humidity                   |         | %       | 10 to 70       | 40     | Pass      |
| Pendulum Velocity                              |         | m/s     | 6.89 to 7.13   | 7.01   | Pass      |
| Pendulum Deceleration                          | 10 msec | G's     | 22.50 to 27.50 | 23.78  | Pass      |
|                                                | 20 msec | G's     | 17.60 to 22.60 | 18.49  | Pass      |
|                                                | 30 msec | G's     | 12.50 to 18.50 | 15.38  | Pass      |
| Peak Pendulum Deceleration After 30 msec       |         | G's     | <= 29.0        | 15.34  | Pass      |
| Deceleration Decay Time to Cross 5 G's         |         | msec    | 34.0 to 42.0   | 37.3   | Pass      |
| Maximum "D" Plane Rotation                     | Maximum | Degrees | 64.0 to 78.0   | 75.8   | Pass      |
|                                                | Time    | msec    | 57.0 to 64.0   | 58.0   | Pass      |
| "D" Plane Rotation Decay Time To Zero Crossing |         | msec    | 113.0 to 128.0 | 114.9  | Pass      |
| Moment About Occipital Condyle                 | Maximum | N m     | 88.1 to 108.5  | 95.0   | Pass      |
|                                                | Time    | msec    | 47.0 to 58.0   | 49.3   | Pass      |
| Positive Moment Decay Time To Zero Crossing    |         | msec    | 97.0 to 107.0  | 103.9  | Pass      |
| Overall Test Results                           |         |         |                |        | Pass      |

  
 Laboratory Technician

09/07/2006  
 Test Date


  
 Approved By




Test Desc: Neck Flexion  
Componet ID: D062692

Test Date: 09/07/2006  
Velocity: 23.01 ft/s, 7.01 m/s

PENDULUM DECELERATION ( G'S) vs TIME (ms)

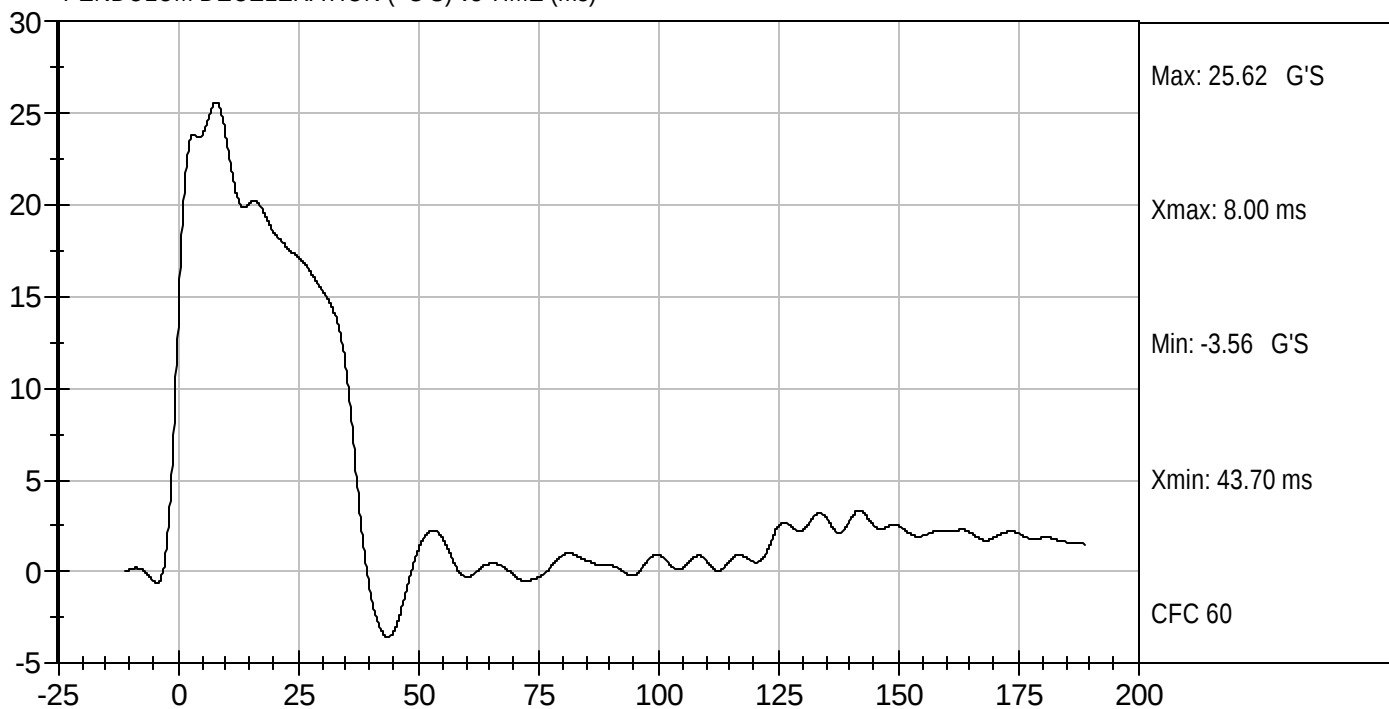


NECK ROTATION (DEG.) vs TIME (ms)

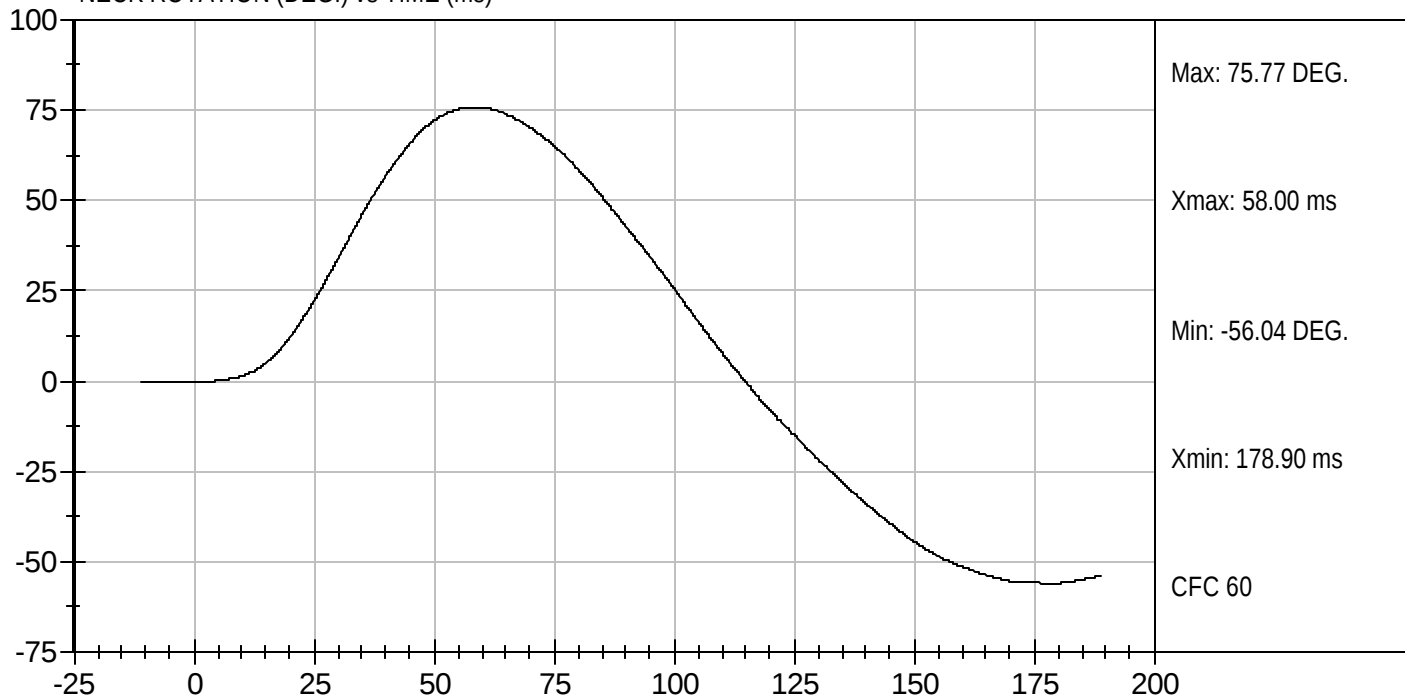



Test Desc: Neck Flexion  
Componet ID: D062692

Test Date: 09/07/2006  
Velocity: 23.01 ft/s, 7.01 m/s

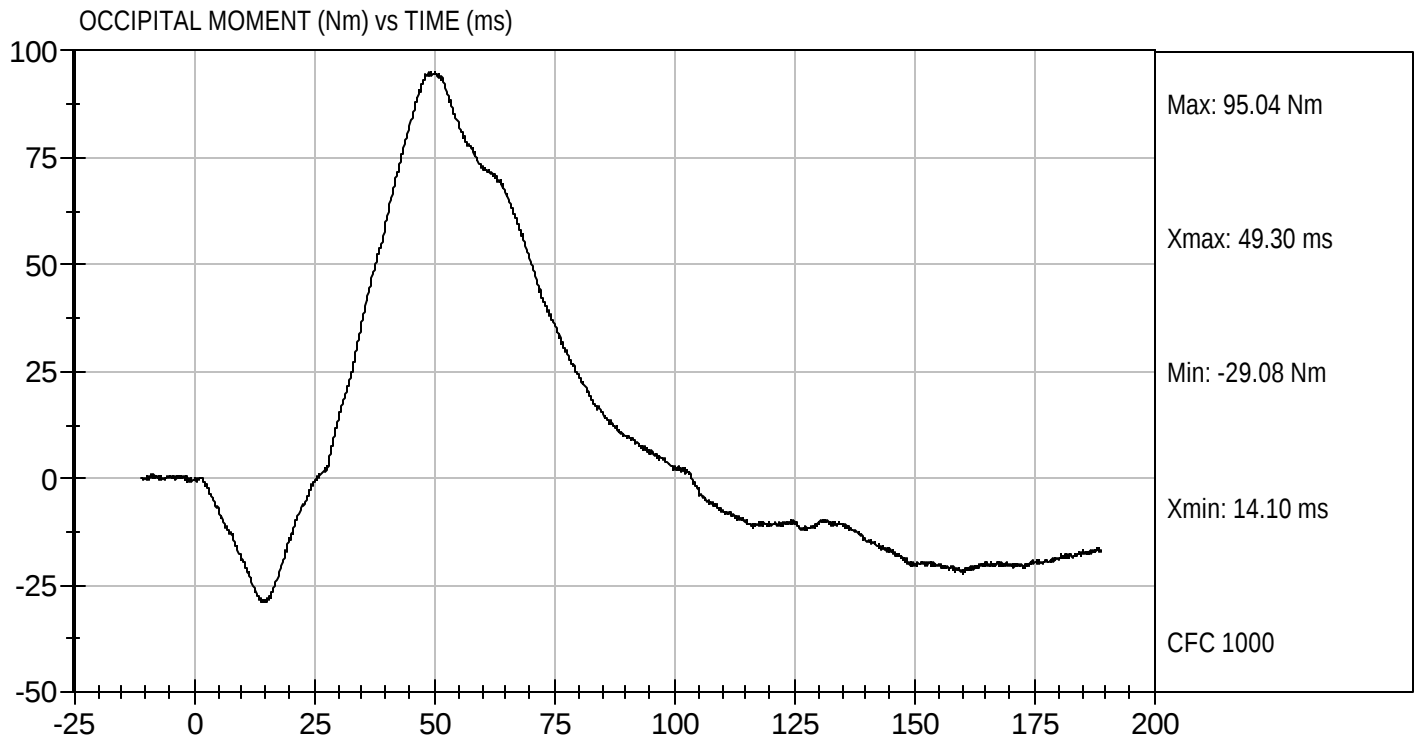

**MGA RESEARCH CORPORATION**  
**NECK EXTENSION TEST**  
**HYBRID III 50TH PERCENTILE MALE**

**ATD Serial No:** 065

**Test I.D:** D062693

| Tested Parameter                               |         | Units   | Specification  | Result | Pass/Fail |
|------------------------------------------------|---------|---------|----------------|--------|-----------|
| Laboratory Temperature                         |         | deg C   | 20.6 to 22.2   | 21.9   | Pass      |
| Laboratory Relative Humidity                   |         | %       | 10 to 70       | 44     | Pass      |
| Pendulum Velocity                              |         | m/s     | 5.95 to 6.19   | 6.04   | Pass      |
| Pendulum Deceleration                          | 10 msec | G's     | 17.20 to 21.20 | 18.90  | Pass      |
|                                                | 20 msec | G's     | 14.00 to 19.00 | 16.20  | Pass      |
|                                                | 30 msec | G's     | 11.00 to 16.00 | 13.45  | Pass      |
| Peak Pendulum Deceleration After 30 msec       |         | G's     | <= 22.0        | 13.49  | Pass      |
| Deceleration Decay Time to Cross 5 G's         |         | msec    | 38.0 to 46.0   | 39.4   | Pass      |
| Maximum "D" Plane Rotation                     | Maximum | Degrees | 81.0 to 106.0  | 99.5   | Pass      |
|                                                | Time    | msec    | 72.0 to 82.0   | 77.5   | Pass      |
| "D" Plane Rotation Decay Time To Zero Crossing |         | msec    | 147.0 to 174.0 | 156.7  | Pass      |
| Moment About Occipital Condyle                 | Maximum | N m     | -52.9 to -79.9 | -67.3  | Pass      |
|                                                | Time    | msec    | 65.0 to 79.0   | 73.1   | Pass      |
| Negative Moment Decay Time To Zero Crossing    |         | msec    | 120.0 to 148.0 | 144.5  | Pass      |
| Overall Test Results                           |         |         |                |        | Pass      |

  
 Laboratory Technician

09/08/2006  
 Test Date


  
 Approved By




Test Desc: Neck Extension  
Componet ID: D062693

Test Date: 09/08/2006  
Velocity: 19.83 ft/s, 6.04 m/s

PENDULUM DECELERATION ( G'S) vs TIME (ms)

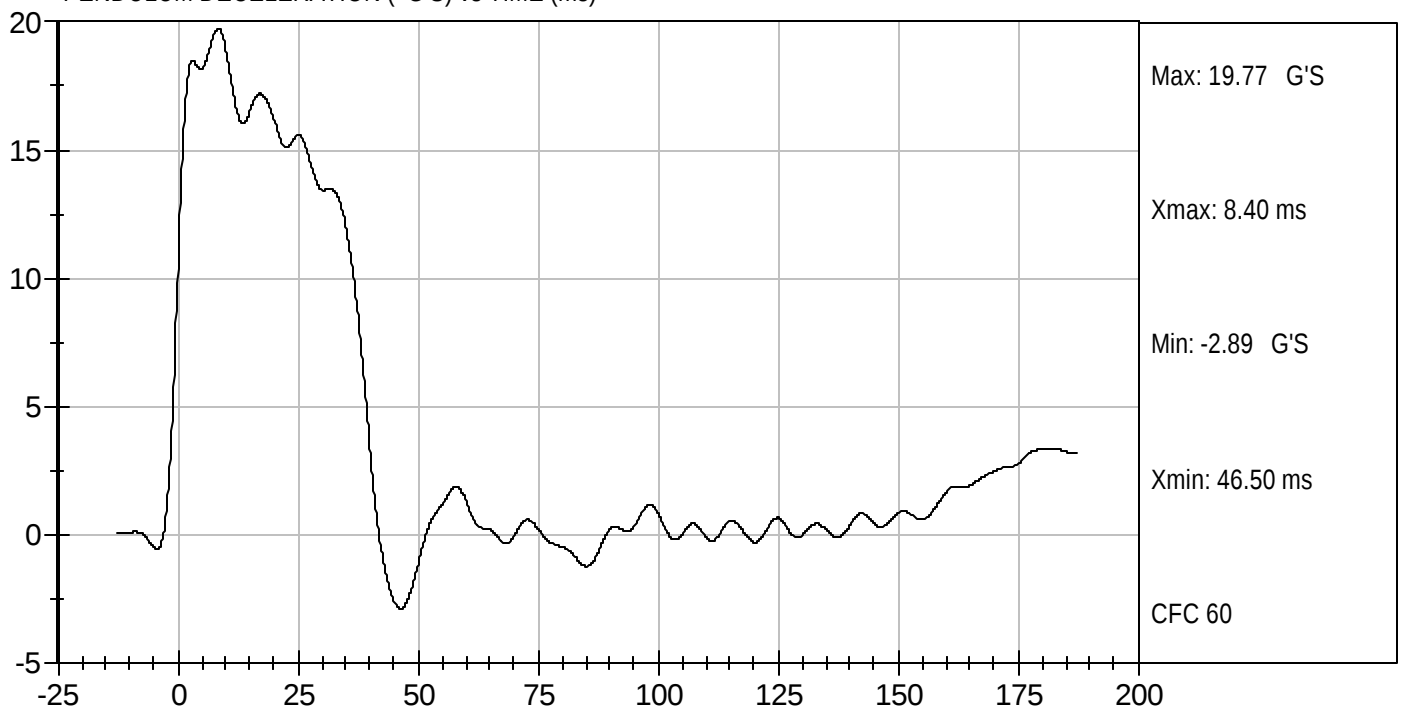


NECK ROTATION (DEG.) vs TIME (ms)

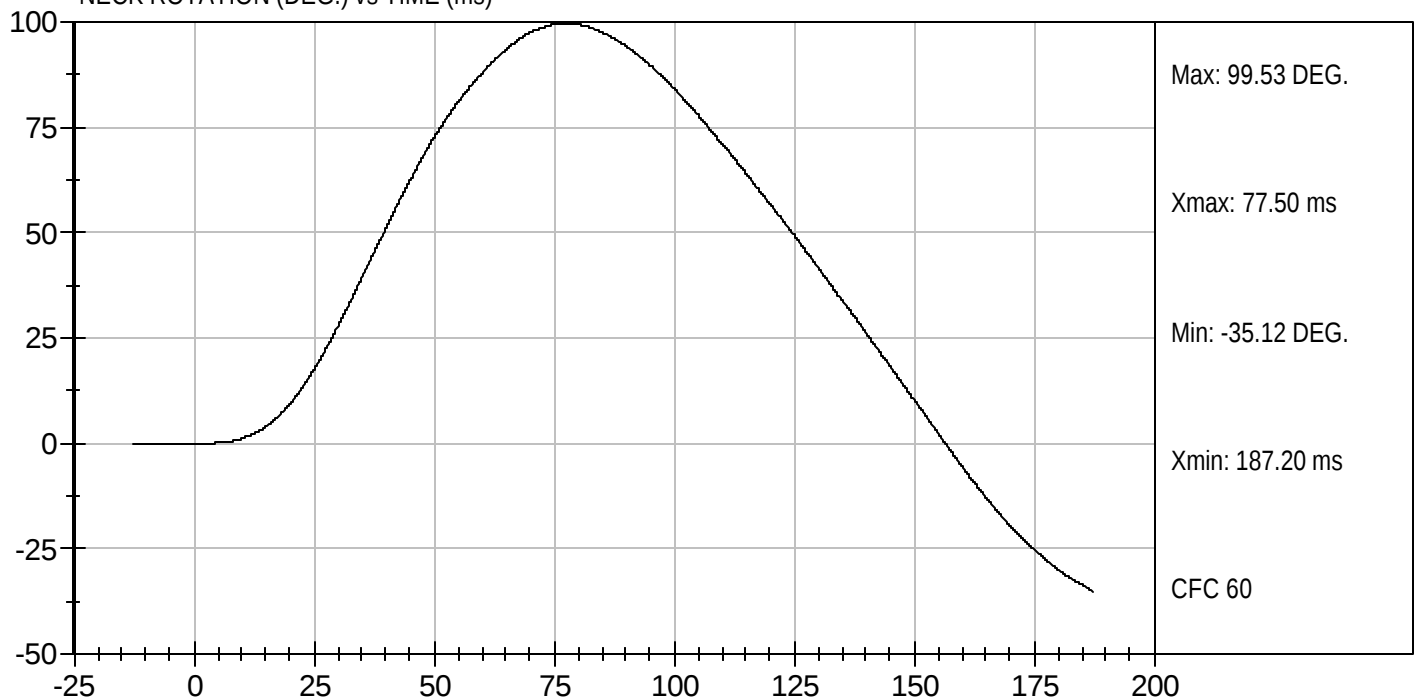



Test Desc: Neck Extension  
Componet ID: D062693

Test Date: 09/08/2006  
Velocity: 19.83 ft/s, 6.04 m/s

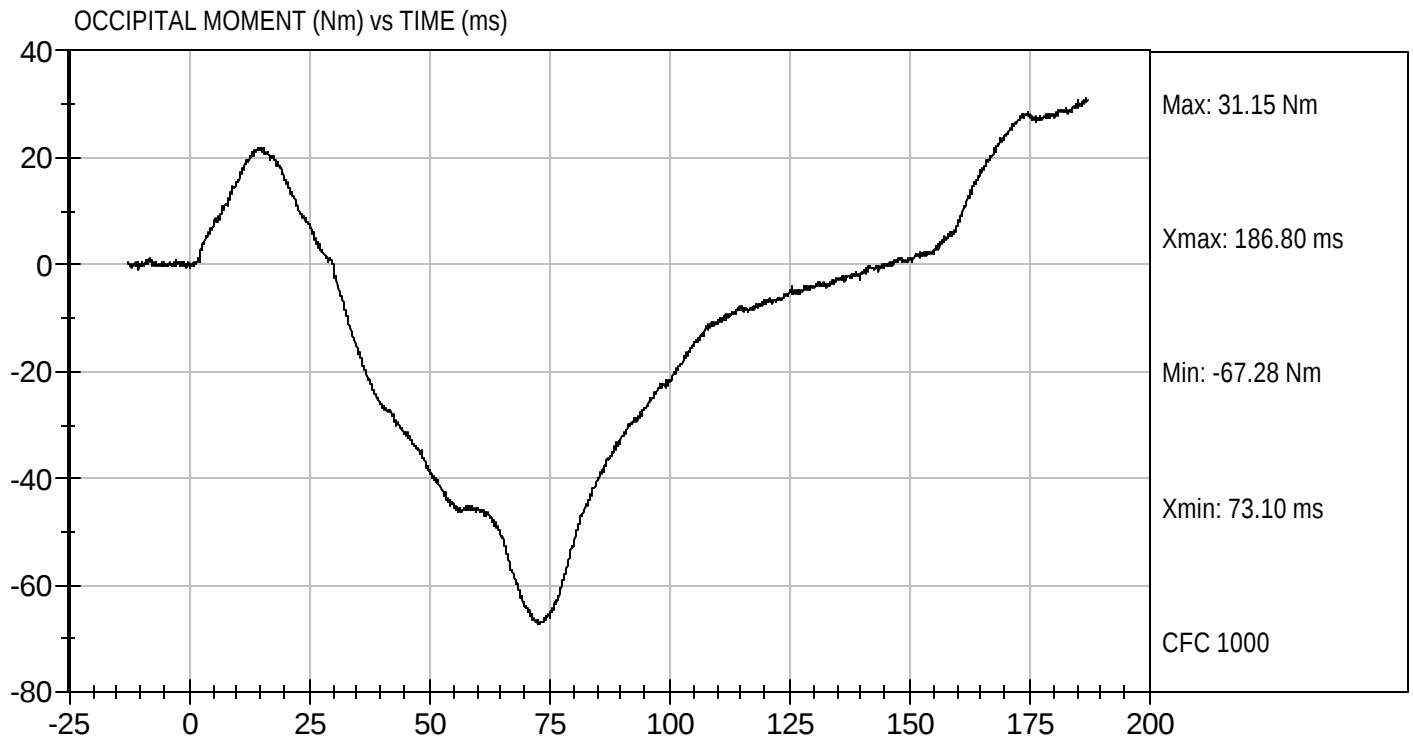


**MGA RESEARCH CORPORATION**  
**THORAX IMPACT**  
**HYBRID III 50TH PERCENTILE MALE**

**ATD Serial No:** 065

**Test I.D:** D062694

| Tested Parameter             | Units | Specification | Result | Pass/Fail |
|------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature       | deg C | 20.6 to 22.2  | 21.5   | Pass      |
| Laboratory Relative Humidity | %     | 10 to 70      | 41     | Pass      |
| Probe Velocity               | m/s   | 6.58 to 6.82  | 6.66   | Pass      |
| Peak Probe Force             | N     | 5159 to 5893  | 5,428  | Pass      |
| Peak Sternum Displacement    | cm    | 6.35 to 7.26  | 7.14   | Pass      |
| Internal Hysteresis          | %     | 69 to 85      | 69     | Pass      |
| Overall Test Results         |       |               | Pass   |           |

  
Laboratory Technician


  
Approved By

09/07/2006  
Test Date



Test Desc: Thorax Impact  
Componet ID: D062694

Test Date: 09/07/2006  
Velocity: 21.86 ft/s, 6.66 m/s

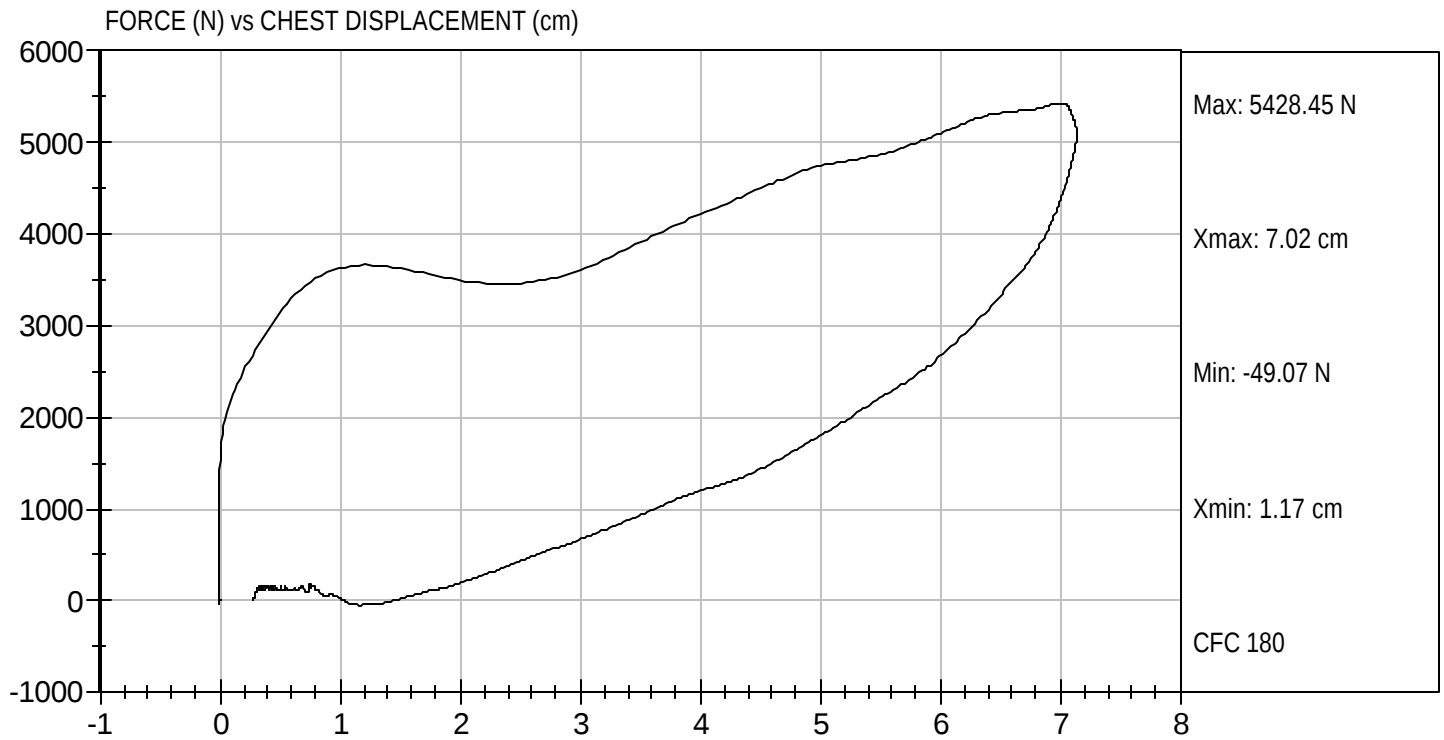

**MGA RESEARCH CORPORATION**  
**RIGHT KNEE IMPACT TEST**  
**HYBRID III 50TH PERCENTILE MALE**

**ATD Serial No:** 065

**Test I.D:** D062695

| Tested Parameter             | Units   | Specification | Result | Pass/Fail |
|------------------------------|---------|---------------|--------|-----------|
| Laboratory Temperature       | deg C   | 18.9 to 25.5  | 21.6   | Pass      |
| Laboratory Relative Humidity | %       | 10 to 70      | 42     | Pass      |
| Probe Velocity               | m/sec   | 2.07 to 2.13  | 2.09   | Pass      |
| Peak Probe Force             | Newtons | 4715 to 5782  | 5,137  | Pass      |
| Overall Test Results         |         |               |        | Pass      |

  
Laboratory Technician


  
Approved By

09/08/2006  
Test Date



Test Desc: Right Knee  
Componet ID: D062695

Test Date: 09/08/2006  
Velocity: 6.86 ft/s, 2.09 m/s

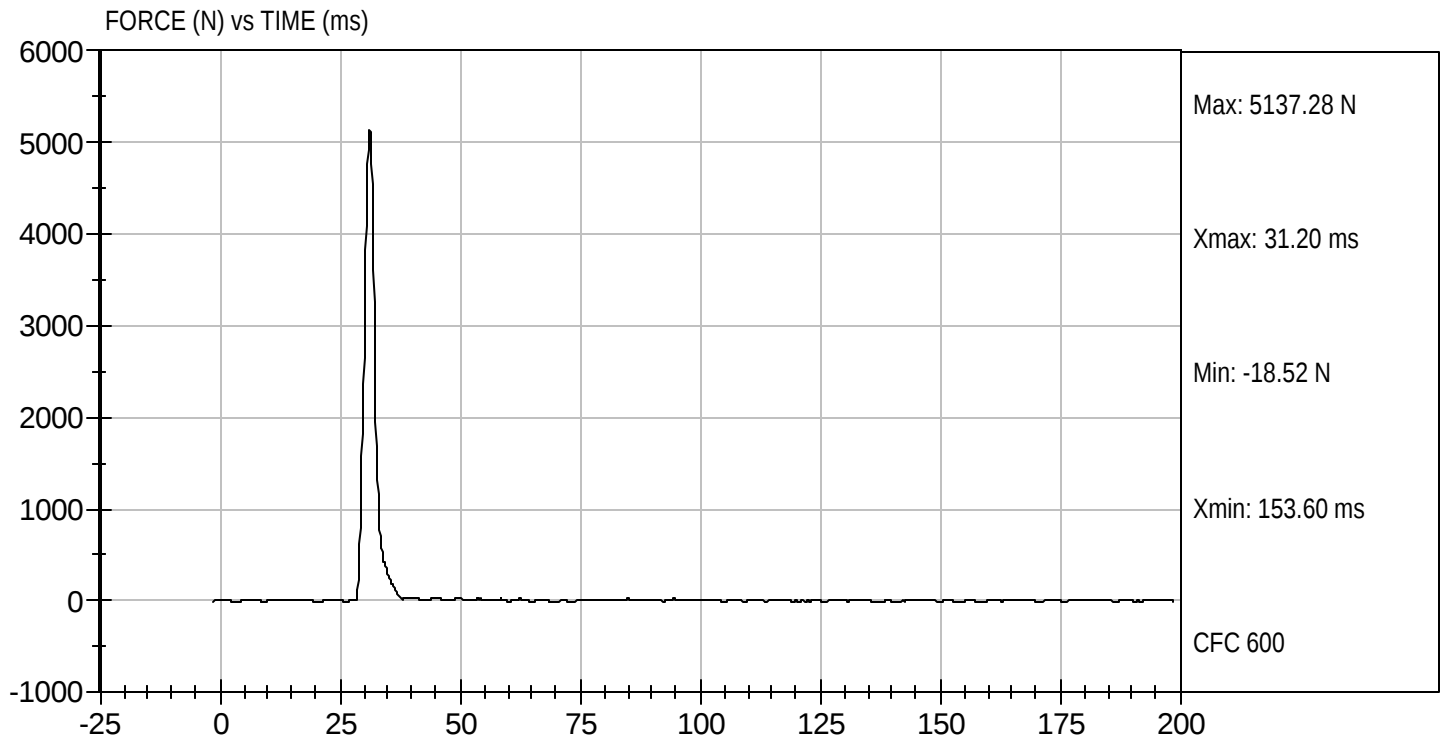

**MGA RESEARCH CORPORATION**  
**LEFT KNEE IMPACT TEST**  
**HYBRID III 50TH PERCENTILE MALE**

**ATD Serial No:** 065

**Test I.D:** D062696

| Tested Parameter             | Units   | Specification | Result | Pass/Fail |
|------------------------------|---------|---------------|--------|-----------|
| Laboratory Temperature       | deg C   | 18.9 to 25.5  | 21.6   | Pass      |
| Laboratory Relative Humidity | %       | 10 to 70      | 42     | Pass      |
| Probe Velocity               | m/sec   | 2.07 to 2.13  | 2.07   | Pass      |
| Peak Probe Force             | Newtons | 4715 to 5782  | 5,469  | Pass      |
| Overall Test Results         |         |               |        | Pass      |

  
Laboratory Technician


  
Approved By

09/08/2006  
Test Date



Test Desc: Left Knee  
Componet ID: D062696

Test Date: 09/08/2006  
Velocity: 6.8 ft/s, 2.07 m/s

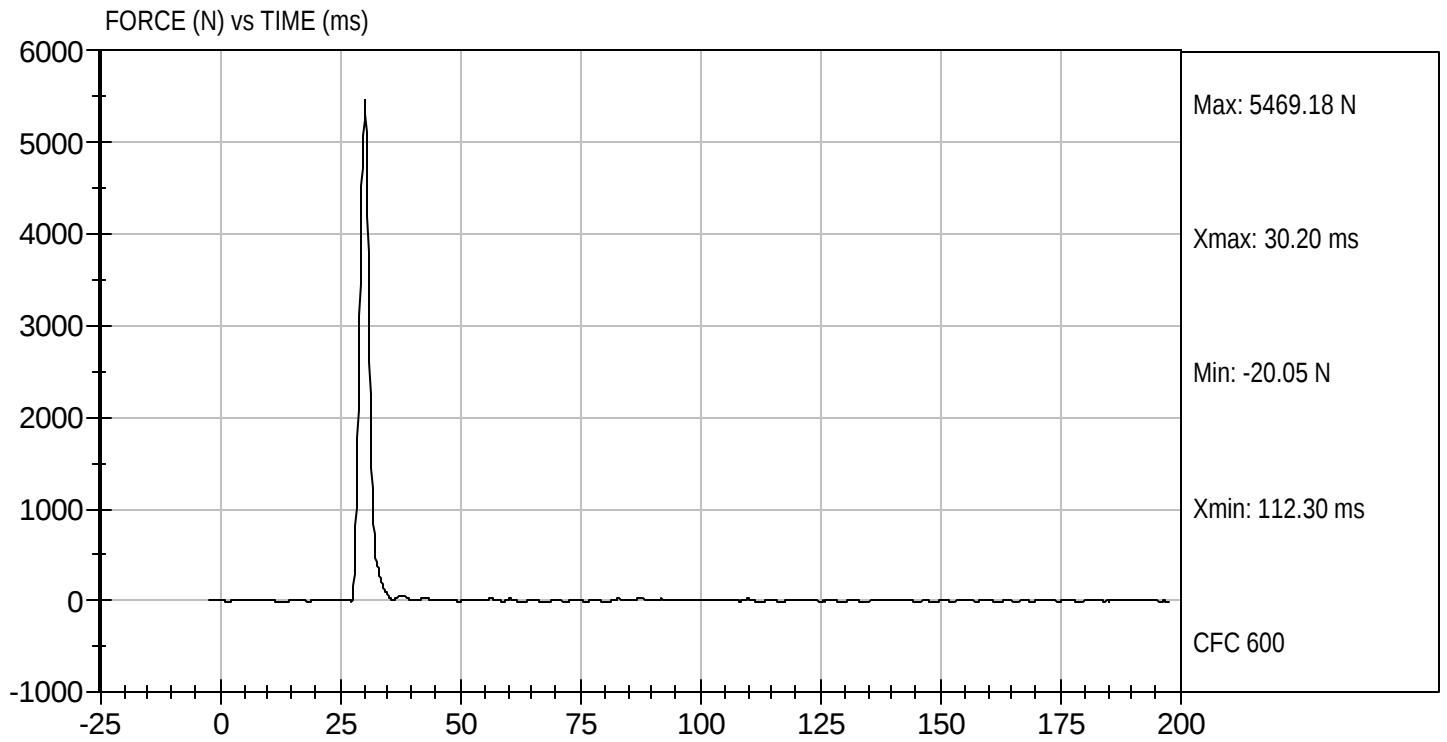

**MGA RESEARCH CORPORATION**  
**HIP-FEMUR FLEXION TEST**  
**HYBRID III 50TH PERCENTILE MALE**

**ATD Serial No:** 065

**Test I.D:** D062690

| Tested Parameter             | Units   | Specification                 | Result |      | Pass/Fail |
|------------------------------|---------|-------------------------------|--------|------|-----------|
|                              |         |                               | Right  | Left |           |
| Laboratory Temperature       | deg C   | 18.9 to 25.6                  | 22.0   | 22.0 | Pass      |
| Laboratory Relative Humidity | %       | 10 to 70                      | 43     | 43   | Pass      |
| Rotation Rate                | deg/sec | 5 -10                         | 8      | 8    | Pass      |
| 30 Degrees                   | Nm      | 94.9 Nm Max                   | 61.9   | 69.2 | Pass      |
| 150 ft-lbf / 203.4 Nm        | Deg     | 40- 50 Degree<br>Max Rotation | 44     | 43   | Pass      |
| Overall Test Results         |         |                               |        |      | Pass      |

  
 Laboratory Technician


09/08/2006  
 Test Date

  
 Approved By



Test Desc: Hip Femur Flexion  
Componet ID: D062699


Test Date: 09/08/2006  
Velocity: 0 ft/s, 0.00 m/s

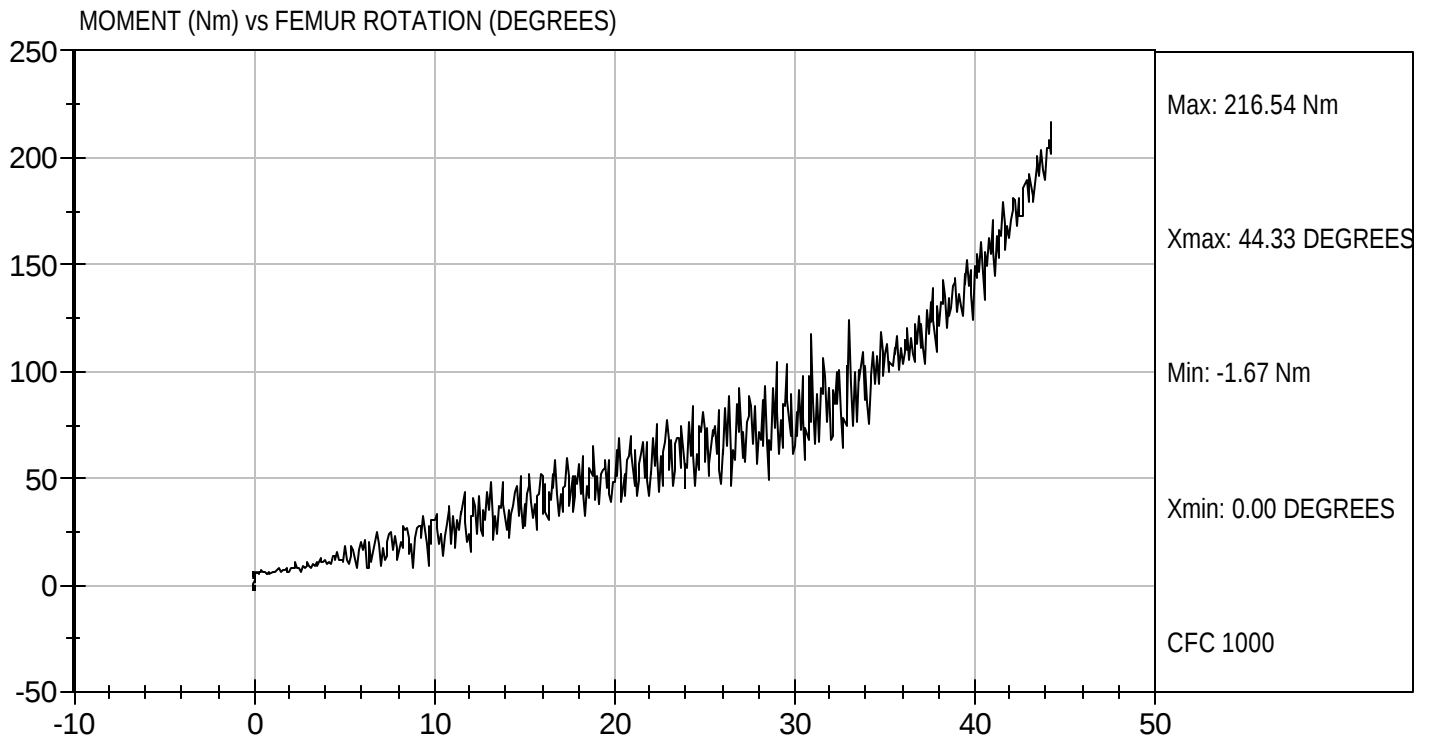



Test Desc: Hip Femur Flexion  
Componet ID: D062690

Test Date: 09/08/2006  
Velocity: 0 ft/s, 0.00 m/s

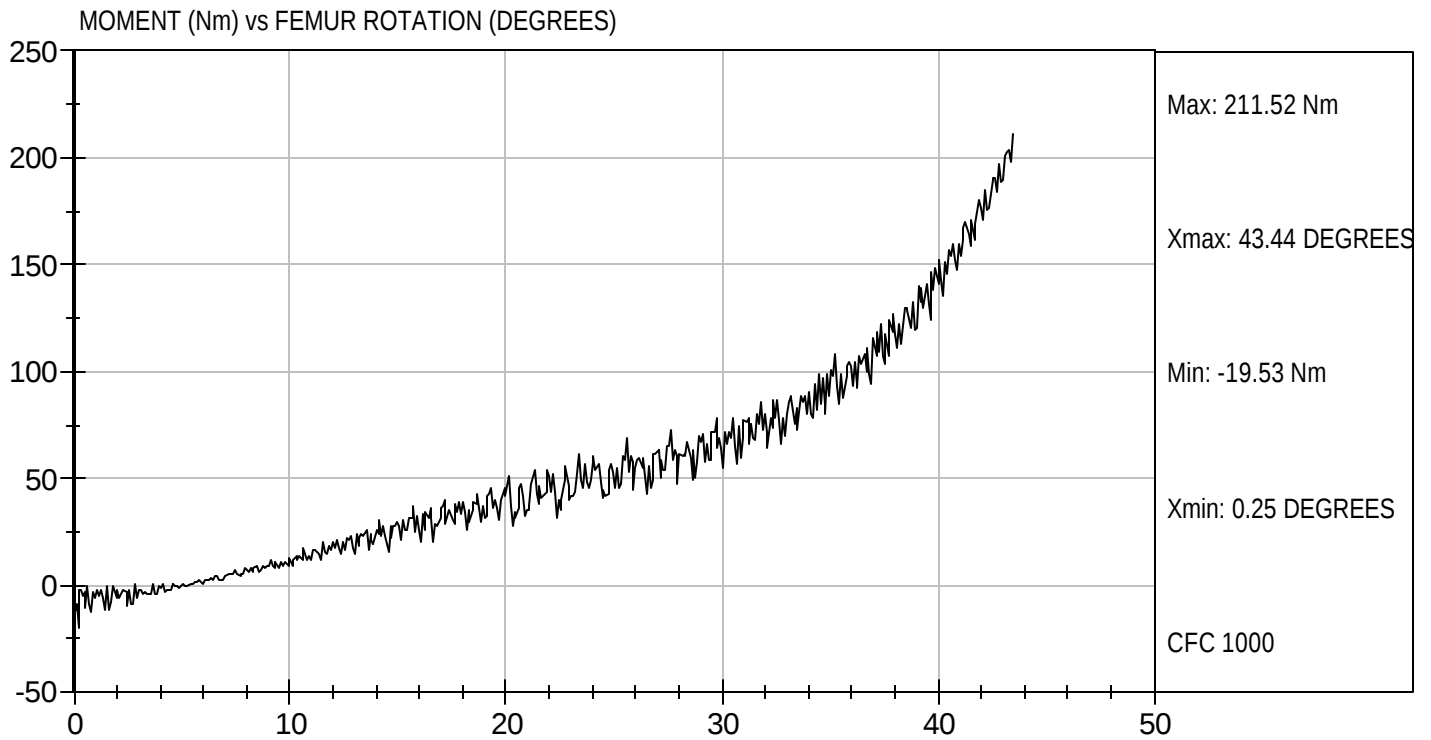

**MGA RESEARCH CORPORATION**  
**HEAD DROP TEST**  
**HYBRID III 50TH PERCENTILE MALE**

**ATD Serial No:** 066

**Test ID:** D062701

| Tested Parameter             | Units | Specification      | Result | Pass/Fail |
|------------------------------|-------|--------------------|--------|-----------|
| Laboratory Temperature       | deg C | 18.9 - 25.6        | 21.3   | Pass      |
| Laboratory Relative Humidity | %     | 10 to 70           | 40     | Pass      |
| Peak Resultant Acceleration  | G's   | 225 - 275          | 258    | Pass      |
| Peak Lateral Acceleration    | G's   | <= +/- 15.0        | -12.6  | Pass      |
| Unimodal                     | N/A   | Yes                | Yes    | Pass      |
| Oscillations                 | N/A   | within 10% of peak | Yes    | Pass      |
| Overall Test Results         |       |                    | Pass   |           |

  
Laboratory Technician

  
Approved By


09/07/2006  
Test Date




Test Desc: Head Drop  
Componet ID: D062701

Test Date: 09/07/2006  
Velocity: 0 ft/s, 0.00 m/s

HEAD RESULTANT ACCELERATION (G'S) vs TIME (ms)

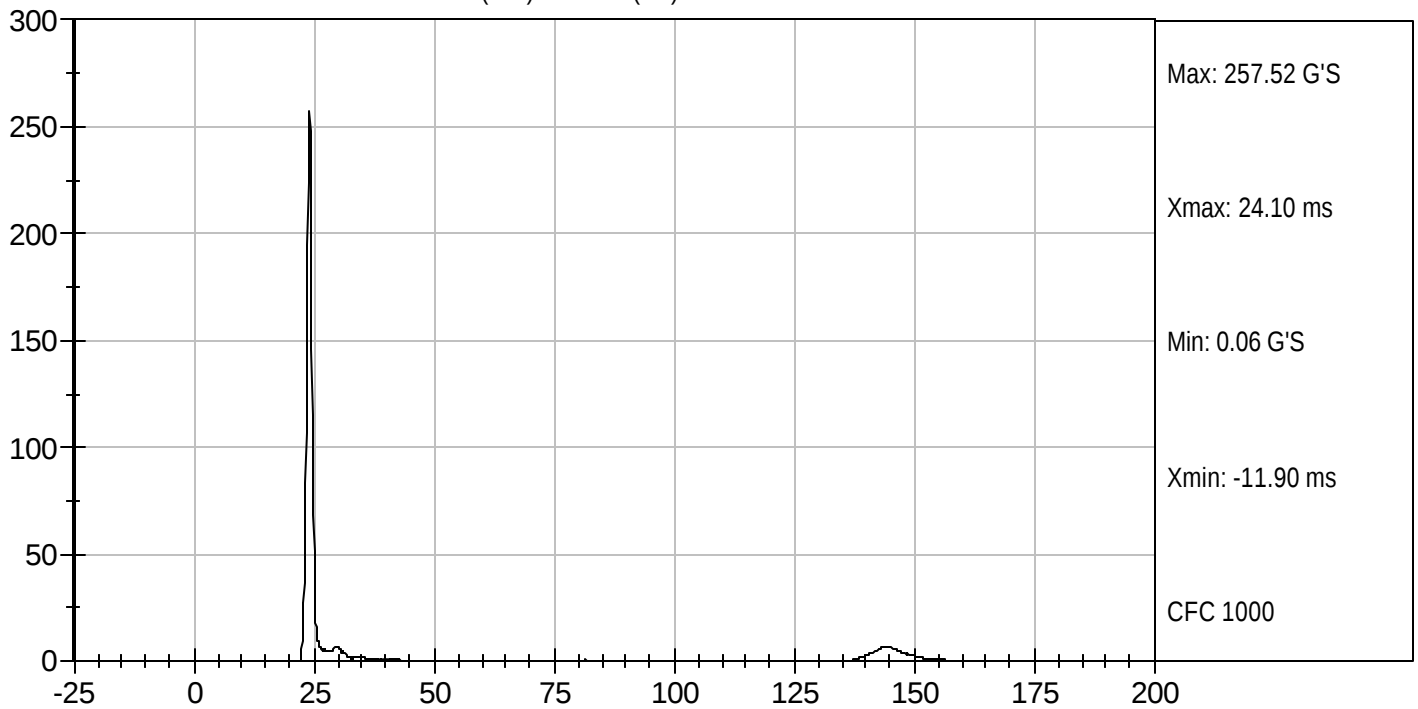

HEAD Y (G's) vs TIME (ms)

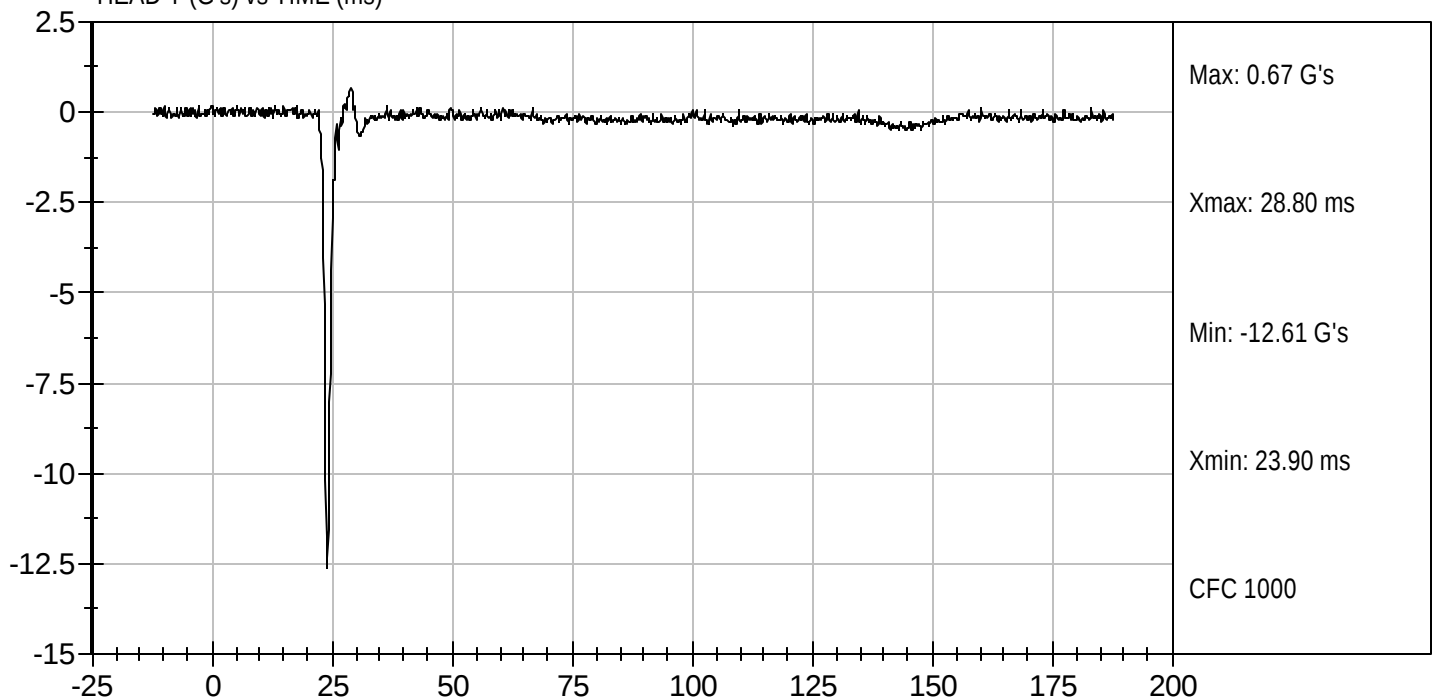

**MGA RESEARCH CORPORATION**  
**NECK FLEXION TEST**  
**HYBRID III 50TH PERCENTILE MALE**

**ATD Serial No:** 066

**Test I.D:** D062702

| Tested Parameter                               |         | Units   | Specification  | Result | Pass/Fail |
|------------------------------------------------|---------|---------|----------------|--------|-----------|
| Laboratory Temperature                         |         | deg C   | 20.6 to 22.2   | 21.9   | Pass      |
| Laboratory Relative Humidity                   |         | %       | 10 to 70       | 44     | Pass      |
| Pendulum Velocity                              |         | m/s     | 6.89 to 7.13   | 7.05   | Pass      |
| Pendulum Deceleration                          | 10 msec | G's     | 22.50 to 27.50 | 23.97  | Pass      |
|                                                | 20 msec | G's     | 17.60 to 22.60 | 19.84  | Pass      |
|                                                | 30 msec | G's     | 12.50 to 18.50 | 14.51  | Pass      |
| Peak Pendulum Deceleration After 30 msec       |         | G's     | <= 29.0        | 14.55  | Pass      |
| Deceleration Decay Time to Cross 5 G's         |         | msec    | 34.0 to 42.0   | 37.7   | Pass      |
| Maximum "D" Plane Rotation                     | Maximum | Degrees | 64.0 to 78.0   | 64.6   | Pass      |
|                                                | Time    | msec    | 57.0 to 64.0   | 59.3   | Pass      |
| "D" Plane Rotation Decay Time To Zero Crossing |         | msec    | 113.0 to 128.0 | 114.7  | Pass      |
| Moment About Occipital Condyle                 | Maximum | N m     | 88.1 to 108.5  | 94.5   | Pass      |
|                                                | Time    | msec    | 47.0 to 58.0   | 48.8   | Pass      |
| Positive Moment Decay Time To Zero Crossing    |         | msec    | 97.0 to 107.0  | 102.5  | Pass      |
| Overall Test Results                           |         |         |                |        | Pass      |

  
 Laboratory Technician

09/08/2006  
 Test Date


  
 Approved By




Test Desc: Neck Flexion  
Componet ID: D062702

Test Date: 09/08/2006  
Velocity: 23.12 ft/s, 7.05 m/s

PENDULUM DECELERATION ( G'S) vs TIME (ms)

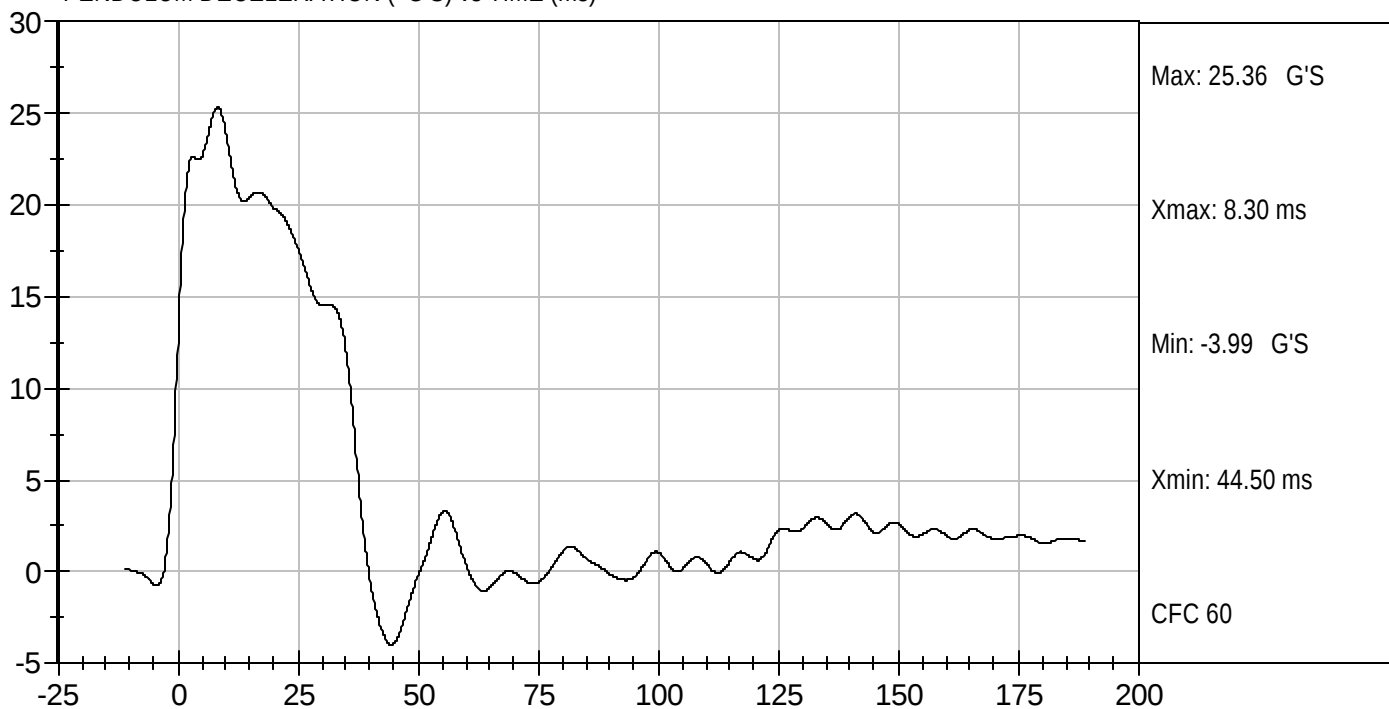


NECK ROTATION (DEG.) vs TIME (ms)

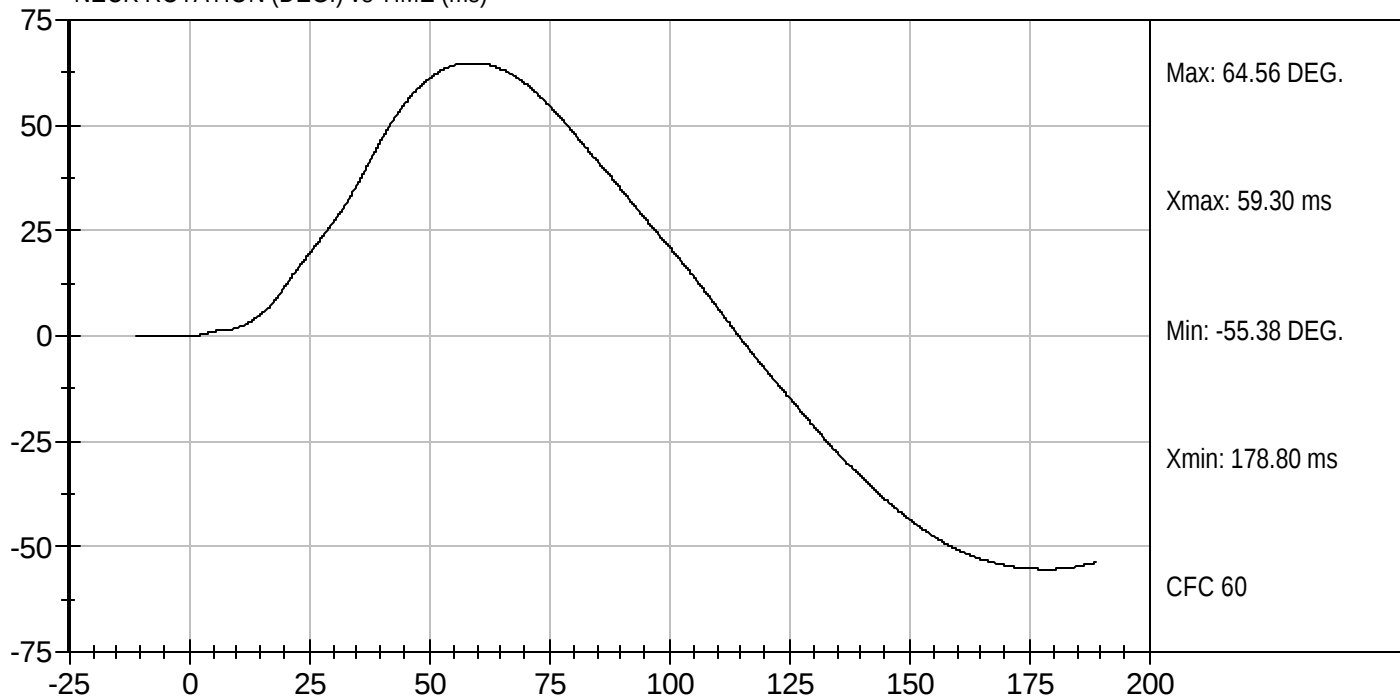



Test Desc: Neck Flexion  
Componet ID: D062702

Test Date: 09/08/2006  
Velocity: 23.12 ft/s, 7.05 m/s

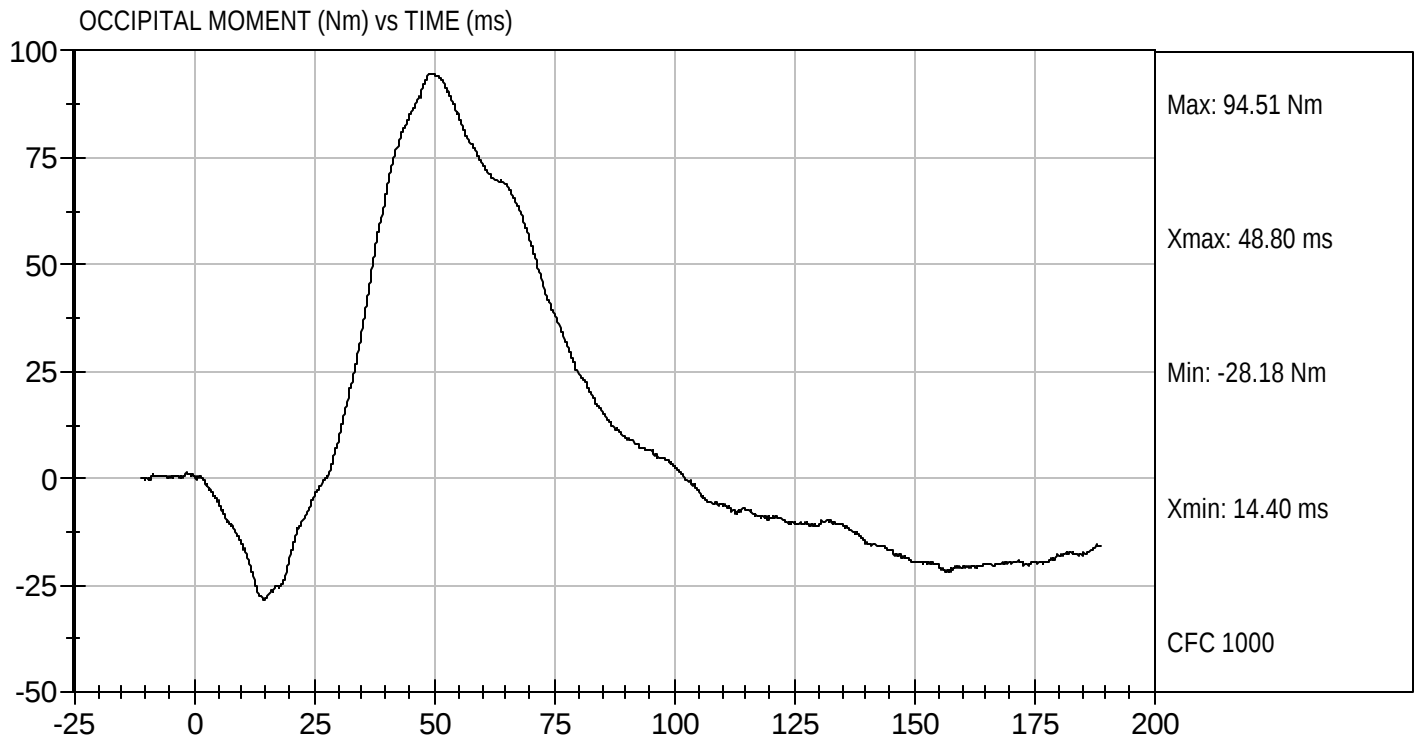

**MGA RESEARCH CORPORATION**  
**NECK EXTENSION TEST**  
**HYBRID III 50TH PERCENTILE MALE**

**ATD Serial No:** 066

**Test I.D:** D062703

| Tested Parameter                               |         | Units   | Specification  | Result | Pass/Fail |
|------------------------------------------------|---------|---------|----------------|--------|-----------|
| Laboratory Temperature                         |         | deg C   | 20.6 to 22.2   | 22.0   | Pass      |
| Laboratory Relative Humidity                   |         | %       | 10 to 70       | 43     | Pass      |
| Pendulum Velocity                              |         | m/s     | 5.95 to 6.19   | 6.04   | Pass      |
| Pendulum Deceleration                          | 10 msec | G's     | 17.20 to 21.20 | 18.59  | Pass      |
|                                                | 20 msec | G's     | 14.00 to 19.00 | 16.14  | Pass      |
|                                                | 30 msec | G's     | 11.00 to 16.00 | 12.85  | Pass      |
| Peak Pendulum Deceleration After 30 msec       |         | G's     | <= 22.0        | 12.80  | Pass      |
| Deceleration Decay Time to Cross 5 G's         |         | msec    | 38.0 to 46.0   | 39.6   | Pass      |
| Maximum "D" Plane Rotation                     | Maximum | Degrees | 81.0 to 106.0  | 100.4  | Pass      |
|                                                | Time    | msec    | 72.0 to 82.0   | 77.9   | Pass      |
| "D" Plane Rotation Decay Time To Zero Crossing |         | msec    | 147.0 to 174.0 | 157.5  | Pass      |
| Moment About Occipital Condyle                 | Maximum | N m     | -52.9 to -79.9 | -67.2  | Pass      |
|                                                | Time    | msec    | 65.0 to 79.0   | 73.1   | Pass      |
| Negative Moment Decay Time To Zero Crossing    |         | msec    | 120.0 to 148.0 | 147.1  | Pass      |
| Overall Test Results                           |         |         |                | Pass   |           |

  
 Laboratory Technician

09/08/2006  
 Test Date


  
 Approved By




Test Desc: Neck Extension  
Componet ID: D062703

Test Date: 09/08/2006  
Velocity: 19.8 ft/s, 6.04 m/s

PENDULUM DECELERATION ( G'S) vs TIME (ms)

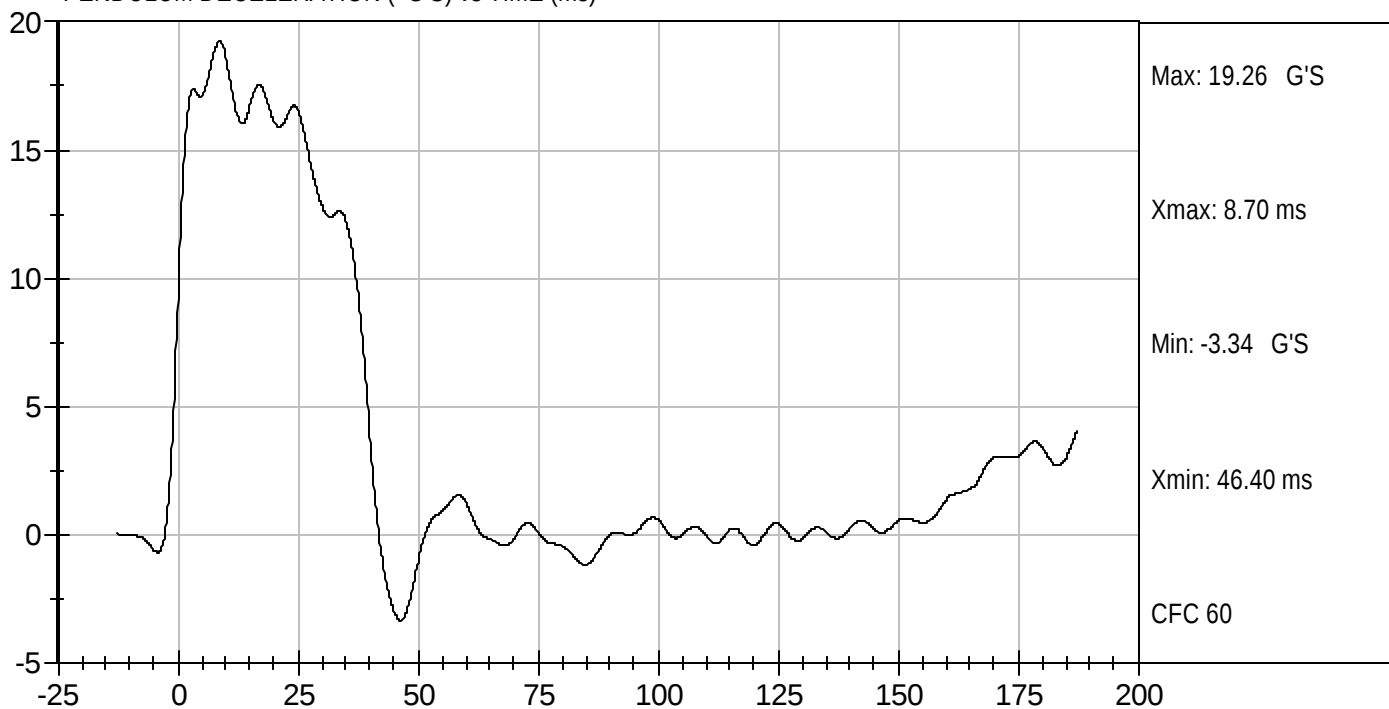


NECK ROTATION (DEG.) vs TIME (ms)

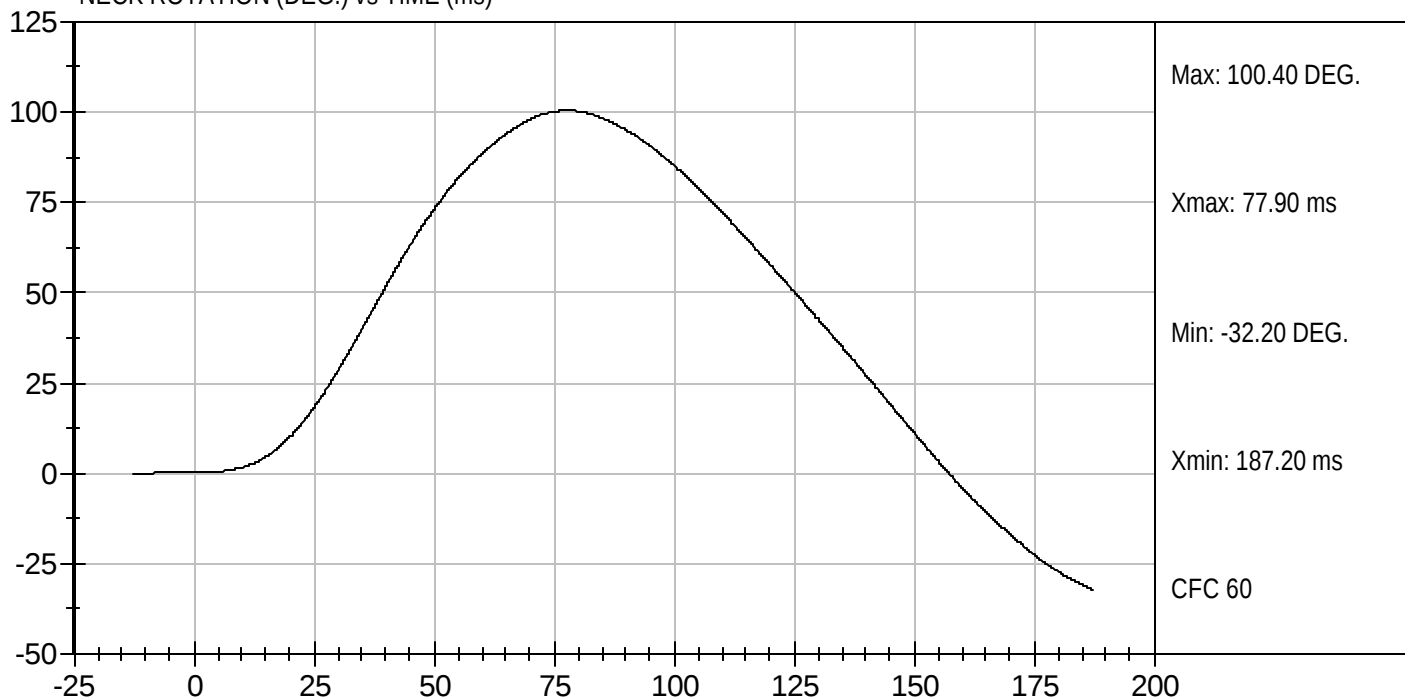



Test Desc: Neck Extension  
Componet ID: D062703

Test Date: 09/08/2006  
Velocity: 19.8 ft/s, 6.04 m/s

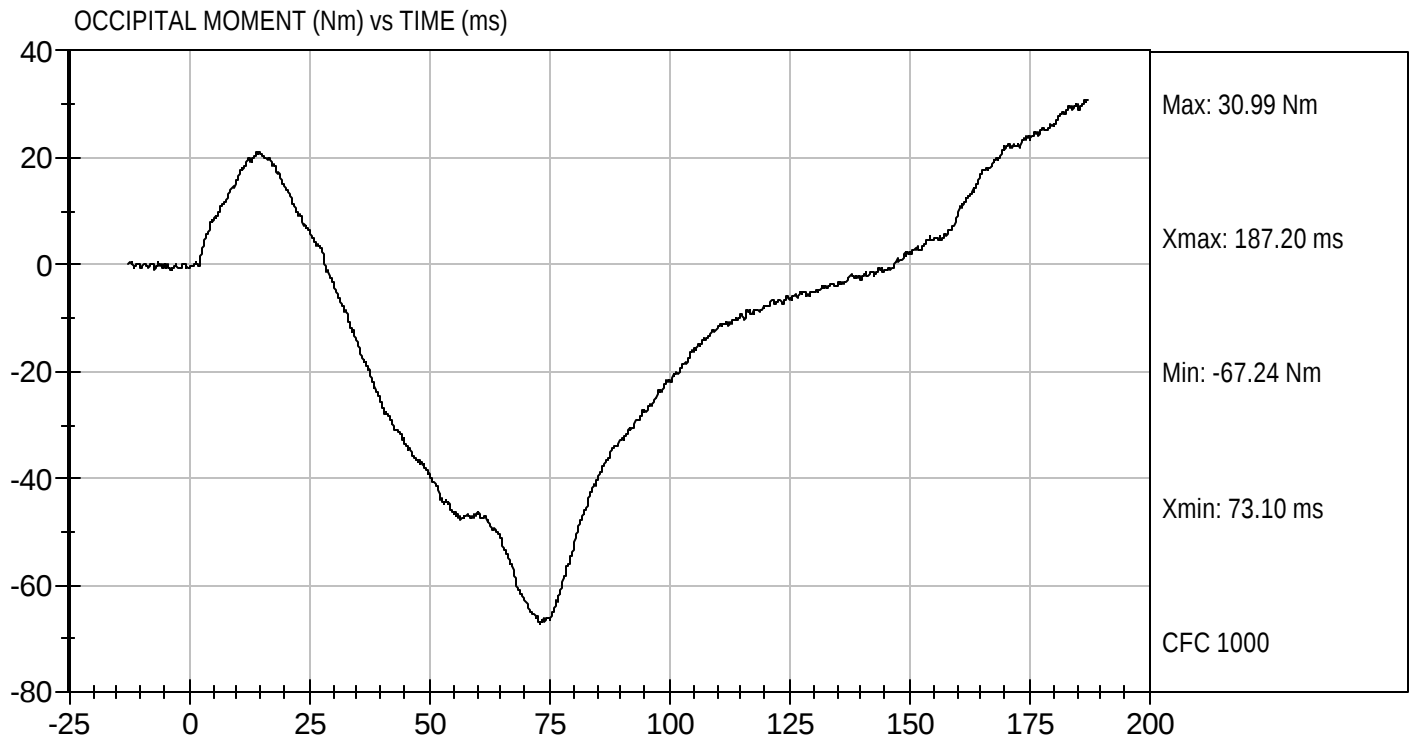

**MGA RESEARCH CORPORATION  
THORAX IMPACT  
HYBRID III 50TH PERCENTILE MALE**

**ATD Serial No:** 066

**Test I.D:** D062704

| Tested Parameter             | Units | Specification | Result | Pass/Fail |
|------------------------------|-------|---------------|--------|-----------|
| Laboratory Temperature       | deg C | 20.6 to 22.2  | 21.3   | Pass      |
| Laboratory Relative Humidity | %     | 10 to 70      | 40     | Pass      |
| Probe Velocity               | m/s   | 6.58 to 6.82  | 6.63   | Pass      |
| Peak Probe Force             | N     | 5159 to 5893  | 5,388  | Pass      |
| Peak Sternum Displacement    | cm    | 6.35 to 7.26  | 6.85   | Pass      |
| Internal Hysteresis          | %     | 69 to 85      | 70     | Pass      |
| Overall Test Results         |       |               | Pass   |           |

  
Laboratory Technician


  
Approved By

09/07/2006  
Test Date



Test Desc: Thorax Impact  
Componet ID: D062704

Test Date: 09/07/2006  
Velocity: 21.76 ft/s, 6.63 m/s

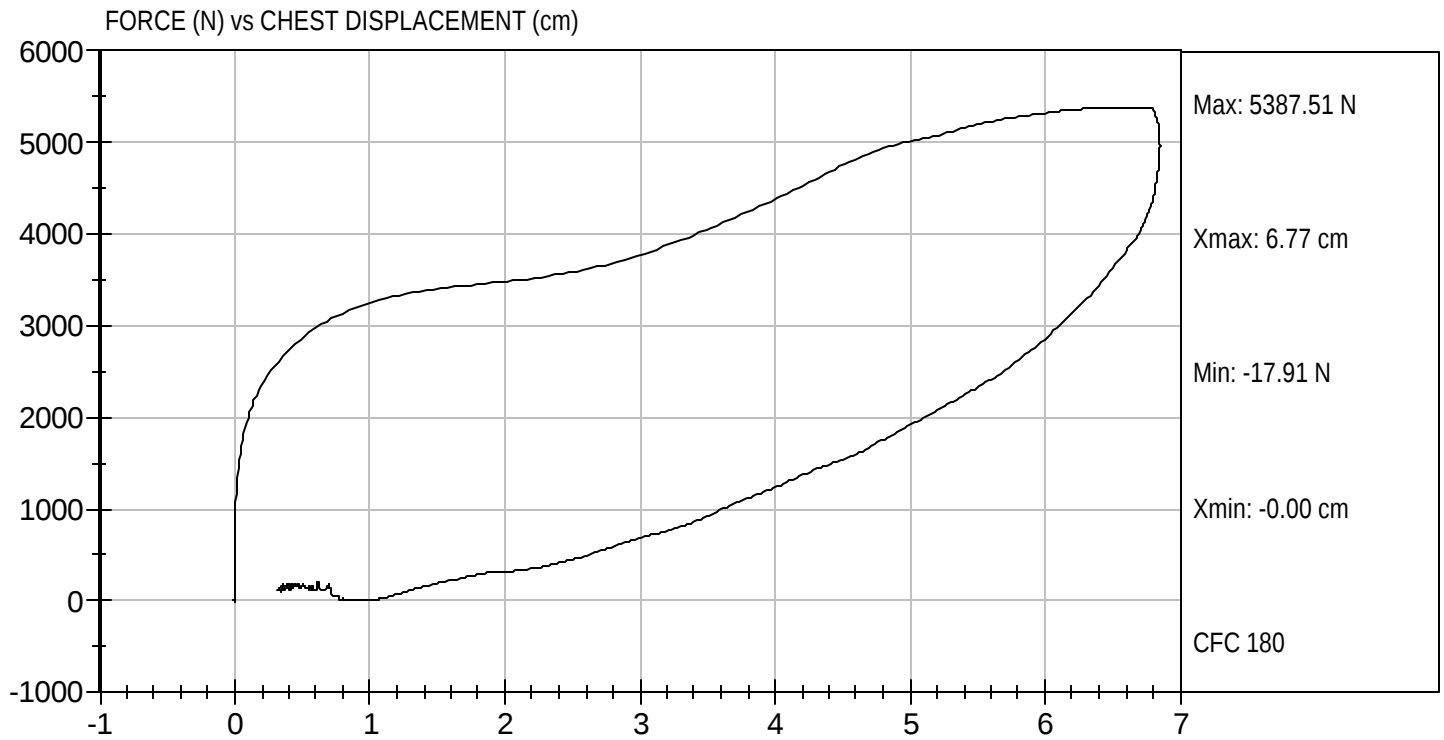

**MGA RESEARCH CORPORATION**  
**RIGHT KNEE IMPACT TEST**  
**HYBRID III 50TH PERCENTILE MALE**

**ATD Serial No:** 066

**Test I.D:** D062705

| Tested Parameter             | Units   | Specification | Result | Pass/Fail |
|------------------------------|---------|---------------|--------|-----------|
| Laboratory Temperature       | deg C   | 18.9 to 25.5  | 21.5   | Pass      |
| Laboratory Relative Humidity | %       | 10 to 70      | 42     | Pass      |
| Probe Velocity               | m/sec   | 2.07 to 2.13  | 2.10   | Pass      |
| Peak Probe Force             | Newtons | 4715 to 5782  | 5,680  | Pass      |
| Overall Test Results         |         |               |        | Pass      |

  
Laboratory Technician


  
Approved By

09/08/2006  
Test Date



Test Desc: Right Knee  
Componet ID: D062705

Test Date: 09/08/2006  
Velocity: 6.88 ft/s, 2.10 m/s

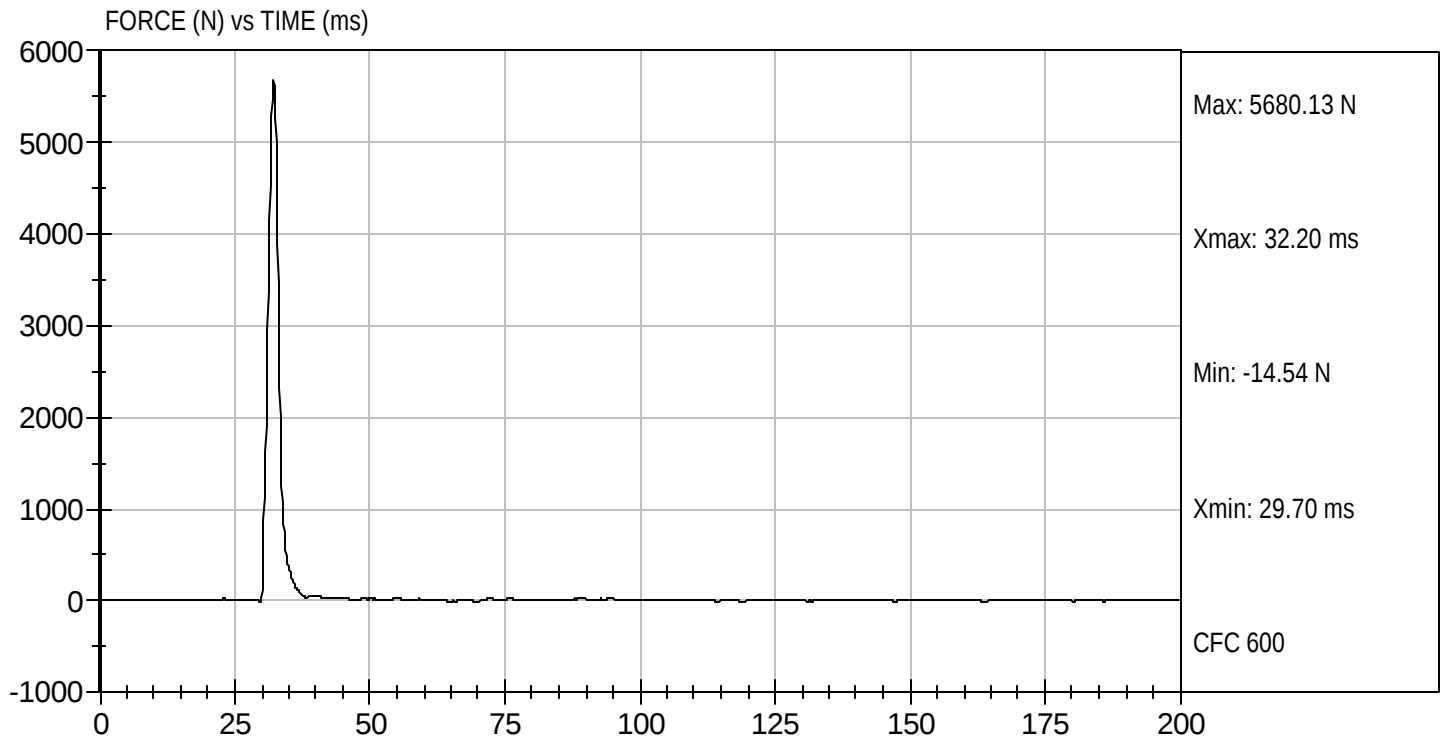

**MGA RESEARCH CORPORATION**  
**LEFT KNEE IMPACT TEST**  
**HYBRID III 50TH PERCENTILE MALE**

**ATD Serial No:** 066

**Test I.D:** D062706

| Tested Parameter             | Units   | Specification | Result | Pass/Fail |
|------------------------------|---------|---------------|--------|-----------|
| Laboratory Temperature       | deg C   | 18.9 to 25.5  | 21.8   | Pass      |
| Laboratory Relative Humidity | %       | 10 to 70      | 43     | Pass      |
| Probe Velocity               | m/sec   | 2.07 to 2.13  | 2.09   | Pass      |
| Peak Probe Force             | Newtons | 4715 to 5782  | 5,167  | Pass      |
| Overall Test Results         |         |               |        | Pass      |

  
Laboratory Technician


  
Approved By

09/08/2006  
Test Date



Test Desc: Left Knee  
Componet ID: D062706

Test Date: 09/08/2006  
Velocity: 6.87 ft/s, 2.09 m/s

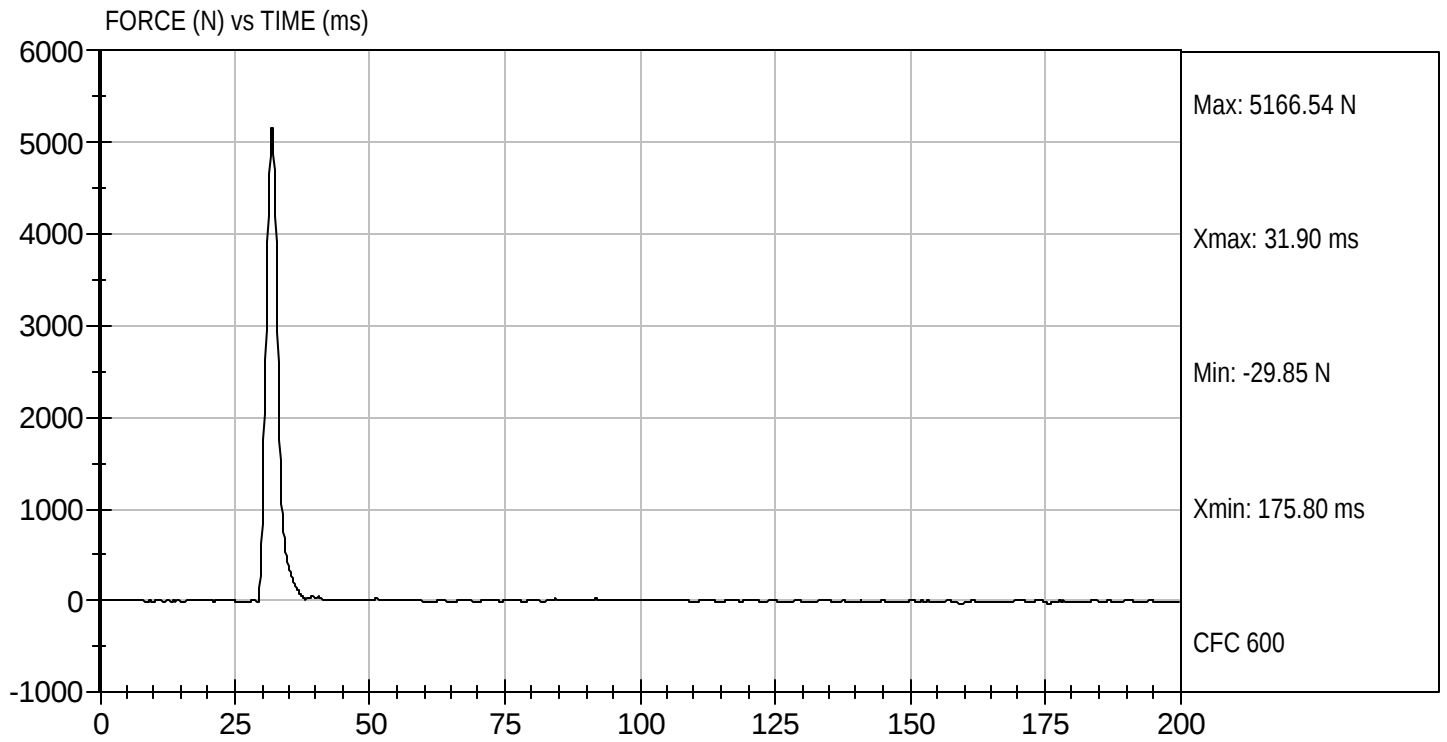

**MGA RESEARCH CORPORATION**  
**HIP-FEMUR FLEXION TEST**  
**HYBRID III 50TH PERCENTILE MALE**


**ATD Serial No:** 066

**Test I.D:** D062709

| Tested Parameter             | Units   | Specification                 | Result |      | Pass/Fail |
|------------------------------|---------|-------------------------------|--------|------|-----------|
|                              |         |                               | Right  | Left |           |
| Laboratory Temperature       | deg C   | 18.9 to 25.6                  | 22.0   | 22.0 | Pass      |
| Laboratory Relative Humidity | %       | 10 to 70                      | 43     | 43   | Pass      |
| Rotation Rate                | deg/sec | 5 -10                         | 8      | 8    | Pass      |
| 30 Degrees                   | Nm      | 94.9 Nm Max                   | 87.7   | 76.4 | Pass      |
| 150 ft-lbf / 203.4 Nm        | Deg     | 40- 50 Degree<br>Max Rotation | 43     | 40   | Pass      |
| Overall Test Results         |         |                               |        | Pass |           |

  
 Laboratory Technician


09/08/2006  
 Test Date

  
 Approved By



Test Desc: Hip Femur Flexion  
Componet ID: D062709

Test Date: 09/08/2006  
Velocity: 0 ft/s, 0.00 m/s

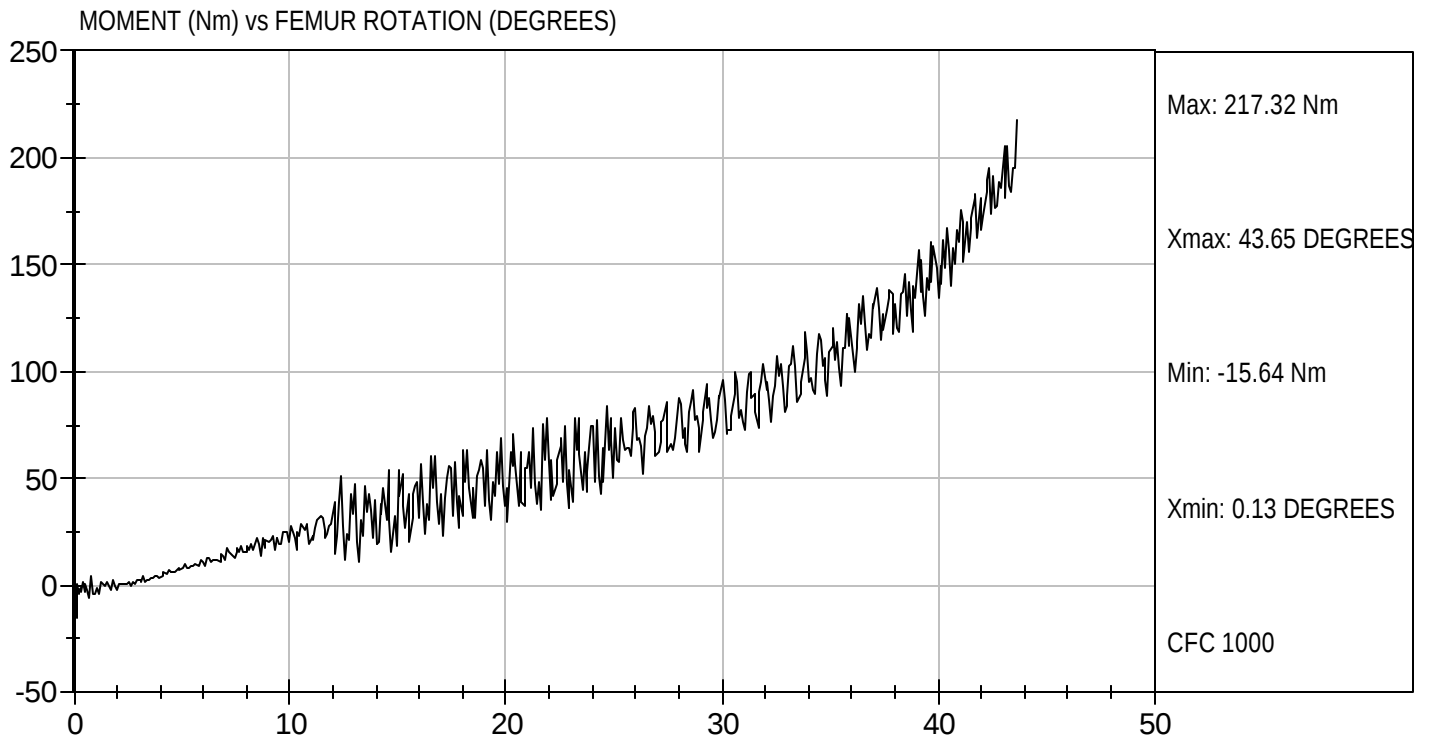



Test Desc: Hip Femur Flexion  
Componet ID: D062700

Test Date: 09/08/2006  
Velocity: 0 ft/s, 0.00 m/s

