

REPORT NUMBER: SNCAP-KAR-11-044

**NEW CAR ASSESSMENT PROGRAM (NCAP)
MOVING DEFORMABLE BARRIER SIDE IMPACT TEST**

**TOYOTA MOTOR MANUFACTURING, KENTUCKY, INC.
2011 TOYOTA VENZA 5-DOOR MPV**

NHTSA No: MB5128

**PREPARED BY:
KARCO ENGINEERING, LLC.
9270 HOLLY ROAD
ADELANTO, CA 92301**



DECEMBER 1, 2010

FINAL REPORT

**PREPARED FOR:
U.S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
OFFICE OF CRASHWORTHINESS STANDARDS
1200 NEW JERSEY AVE, SE
ROOM W43-410
WASHINGTON, D.C. 20590**

TECHNICAL REPORT DOCUMENTATION PAGE

1. Report No. SNCAP-KAR-11-044	2. Government Accession No.	3. Recipient's Catalog No.
4. Title and Subtitle Final Report of New Car Assessment Program Side Impact Testing of a 2011 Toyota Venza 5-Door MPV NHTSA No. MB5128		5. Report Date December 13, 2010
		6. Performing Organization Code KAR
7. Authors Mr. Denver J. Schaffarzick, Project Engineer, KARCO Mr. Frank Richardson, Program Manager, KARCO		8. Performing Organization Report No. TR-P30003-21-NC
9. Performing Organization Name and Address KARCO Engineering, LLC. 9270 Holly Rd. Adelanto, CA, 92301		10. Work Unit No.
		11. Contract or Grant No. DTNH22-09-D-00122
12. Sponsoring Agency Name and Address U. S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards 1200 New Jersey Ave., SE, Room W43-410 Washington, D.C. 20590		13. Type of Report and Period Covered Final Report, December 2010
		14. Sponsoring Agency Code NVS-111
15. Supplementary Notes		

16. Abstract

A 55/28 km/h 90 deg. Moving Deformable Barrier NCAP Side Impact Test was conducted on the subject 2011 Toyota Venza 5-Door MPV in accordance with the specifications of the Office of Crash Worthiness Standards Test Procedure for the generation of consumer information on vehicle side crash protection. The test was conducted at KARCO Engineering, LLC in Adelanto, CA, on December 1, 2010.

The impact velocity of the Moving Deformable Barrier was 62.43 km/h and the outside ambient temperature at the struck (driver's) side of the vehicle was 12.2 deg. C. The target vehicle's maximum post-test static crush was 258 mm located at level 3. The test vehicle's occupant performance data is as follows:

Measurement Description	Driver ATD (ES-2re)		
	Units	Threshold	Result
Head Injury Criteria (HIC ₃₆)		1000	93.9
Maximum Thorax Rib Deflection	mm	44	17.8
Total Abdominal Force	N	2500	1021
Pubic Symphysis Force	N	6000	2377

Measurement Description	Passenger ATD (SID-IIs)		
	Units	Threshold	Result
Head Injury Criteria (HIC ₃₆)		1000	231.1
Lower Spine Resultant Acceleration	g	82	44
Total Pelvic Force (Sum of Acetubular and Iliac Forces)	N	5525	3204

The two doors on the struck side of the vehicle did not separate from the body at the hinges or latches, and the opposite doors did not open during the side impact event.

17. Key Words New Car Assessment Program (NCAP) Side Impact Moving Deformable Barrier (MDB) ES-2re SID-IIs		18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Admin. Technical Reference Division 1200 New Jersey Ave., SE Room W43-410 Washington, DC 20590	
19. Security Classification of this report UNCLASSIFIED	20. Security Classification of this page UNCLASSIFIED	21. No. of Pages 134	22. Price

TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
1	Purpose and Summary of the Test	1
2	Occupant and Vehicle Information/Data Sheets	3
<u>Data Sheet</u>		<u>Page</u>
1	General Test and Vehicle Parameter Data	4
2	Seat Adjustment, Fuel Systems, and Steering Wheel Data	7
3	Dummy Longitudinal Clearance Dimensions	9
4	Dummy Lateral Clearance Dimensions	10
5	Camera Locations and Data	11
6	Vehicle Accelerometer Locations	12
7	MDB Accelerometer Locations	13
8	Test Vehicle Summary of Results	14
9	Moving Deformable Barrier (MDB) Summary of Results	15
10	Post-Test Observations	16
11	Vehicle Profile Measurements	17
12	Vehicle Exterior Crush Measurements	18
13	Vehicle Damage Profile Distances	21
14	Exterior Static Crush for Impactor Face	22
15	FMVSS No. 301 Fuel System Integrity Post-Impact Data	23
16	Dummy/Vehicle Temperature Stabilization	24
<u>Appendix</u>		<u>Page</u>
A	Photographs	A
B	Dummy Response Data	B
C	Dummy Calibration Data	C

SECTION 1

PURPOSE AND SUMMARY OF TEST

PURPOSE

This moving deformable barrier side impact test is part of the MY 2011 New Car Assessment Program Side Impact Test Program, sponsored by the National Highway Traffic Safety Administration (NHTSA), under contract number DTNH22-09-D-00122. The purpose of this test is to generate comparative side impact performance in a 2011 Toyota Venza 5-Door MPV. The side impact test was conducted in accordance with the Office of Crashworthiness Standard's Laboratory Test Procedure dated January 2010.

SUMMARY

A 2011 Toyota Venza 5-Door MPV was impacted on the left (driver's) side by a Moving Deformable Barrier (MDB) which was moving forward in a 27° crabbed position to the tow road guidance system at a velocity of 62.43 km/h (38.79 mph). The target vehicle was stationary and was positioned at an angle of 63° to the line of forward motion. The side impact test was conducted by KARCO Engineering, LLC. in Adelanto, California, on December 1, 2010. Pre- and post-test photographs of the test vehicle, the MDB, and the dummies (ES-2re and SID-IIs) are included in Appendix A of this report (Note: The NHTSA numbers in the photographs should be MB5128, Not MB5218).

Dummies were placed in the driver and left rear designated seating positions according to instructions specified in the OCWS Side Impact Laboratory Test Procedure, dated January 2010. The side impact event was documented by 11 cameras. Camera locations are included in Data Sheet No. 5 of this report.

The dummies were instrumented in the following manner:

DRIVER ATD (ES-2re)

Head Accelerometers

Thorax Rib 1 to Rib 3 Potentiometers

Abdomen Forward, Middle, and Rear Load Cells

Lower Spine Accelerometers

Pubic Load Cell

PASSENGER ATD (SID-IIs)

Head Accelerometers

Thorax Upper, Middle and Lower Rib Potentiometers

Abdomen Upper and Lower Rib Potentiometers

Lower Spine Accelerometers

Iliac Load Cell

Acetabulum Load Cell

Dummy injury values were recorded as follows:

Measurement Description	Units	Driver ATD (ES-2re)	
		Threshold	Result
Head Injury Criteria (HIC ₃₆)		1000	93.9
Maximum Thorax Rib Deflection	mm	44	17.8
Combined Abdominal Force	N	2500	1021
Pubic Symphysis Force	N	6000	2377

Measurement Description	Units	Passenger ATD (SID-IIs)	
		Threshold	Result
Head Injury Criteria (HIC ₃₆)		1000	231.1
Lower Spine (T12) Resultant Acceleration	g	82	44
Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	3204

Supplemental restraint information is given below:

Restraint Type	Left Front (Driver)		Left Rear (Passenger)	
	Mounted	Deployed	Mounted	Deployed
Frontal Airbag	Yes	No	No	
Knee Airbag	Yes	No	No	
Side Airbag 1 (Torso)	Yes	Yes	No	
Side Airbag 2 (Curtain)	Yes	Yes	Yes	Yes
Seat Belt Pretensioner	Yes	No	No	
Seat Belt Load Limiter	Yes	No	No	
Other				

GENERAL COMMENTS

Both the front and rear doors on the struck side of the vehicle remained closed and latched. There was no separation at the hinges or latches. Both doors on the non-struck side remained closed and latched. There were no ATD values that exceeded limits.

SECTION 2

OCCUPANT AND VEHICLE INFORMATION/DATA SHEETS

Test Vehicle: 2011 Toyota Venza 5-Door MPV

NHTSA No. MB5128

Test Program: MDB Side Impact Test

Test Date: 12/01/10

CONVERSION FACTORS

Quantity	Typical Application	Std Units	Metric Unit	Multiply By
Mass	Vehicle Weight	lb	kg	0.4536
Linear Velocity	Impact Velocity	miles/hr	km/hr	1.609344
Length or Distance	Measurements	in	mm	25.4
Volume	Fuel Systems	gal	liter	3.785
Volume	Small Fluids	oz	mL	29.573
Pressure	Tire Pressures	lbf/in ²	kPa	7.0
Volume	Liquid	gal	liter	3.785
Temperature	General Use	°F	°C	$=(t_f - 32)/1.8$
Force	Dynamic Forces	lbf	N	4.448
Moment	Torque	lbf/ft	Nm	1.355

DATA SHEET NO. 1

GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2011 Toyota Venza 5-Door MPV

NHTSA No. MB5128

Test Program: MDB Side Impact Test

Test Date: 12/01/10

TEST VEHICLE INFORMATION AND OPTIONS

NHTSA Number	MB5128
Model Year	2011
Make	Toyota
Model	Venza
Body Style	5-Door MPV
VIN	4T3ZA3BBXBU039813
Body Color	Barcelona Red Met.
Delivery Date	11/17/2010
Odometer Reading (km / mi)	93/58
Dealer	Crown Toyota
Transmission	6-Speed Automatic
Final Drive	Front
Type / No. of Cylinders	Inline 4
Engine Displacement (L)	2.7
Engine Placement	Transverse
Roof Rack	Yes
Sunroof / T-Top	No
Tinted Glass	Yes
Traction Control	Yes
Power Brakes	Yes
Front Disc	Yes
Rear Disc	Yes

Anti-Lock Brakes	Yes
All Wheel Drive	No
Power Steering	Yes
Driver Front Airbag	Yes
Driver Curtain Airbag	Yes
Driver Head/Torso Airbag	No
Driver Torso Airbag	Yes
Driver Torso/Pelvis Airbag	No
Driver Pelvis Airbag	No
Driver Knee Airbag	Yes
Rear Pass. Curtain Airbag	Yes
Rear Pass. Head/Torso Airbag	No
Rear Pass. Torso Airbag	No
Rear Pass. Torso/Pelvis Airbag	No
Rear Pass. Pelvis Airbag	No
Pretensioners	Yes
Load Limiters	Yes
Automatic Door Locks	Yes
Bucket Seats	Yes
Tilt Steering	Yes
Other	
Other	

Does Owner's Manual provide instructions to turn off automatic door locks?

Yes

DATA FROM CERTIFICATION LABEL

Manufactured By	Toyota Motor Manufacturing, Kentucky, Inc.
Date of Manufacture	Oct-10

GVWR (kg)	2245
GAWR Front (kg)	1400
GAWR Rear (kg)	1230

VEHICLE SEATING AND CAPACITY WEIGHT INFORMATION

Measured Parameter	Front	Rear	Third	Total	
Designated Seating Capacity	2	3		5	
Capacity Weight (VCW) (kg)				359.0	A
DSC x 68.04 (kg)				340.2	B
Cargo Weight (RCLW) (kg)				18.8	A-B

VEHICLE SEAT TYPE

Seating Location	Type of Seat Pan				Type of Seat Back		
	Bucket	Bench	Split Bench	Contoured	Fixed	Adjustable	
						w/ Lever	w/ Knob
Front Seat	Yes						Yes
Rear or Second Row Seat			Yes			Yes	
Third Row Seat							

DATA SHEET NO. 1 ... (CONTINUED)


GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2011 Toyota Venza 5-Door MPV

NHTSA No. MB5128

Test Program: MDB Side Impact Test

Test Date: 12/01/10

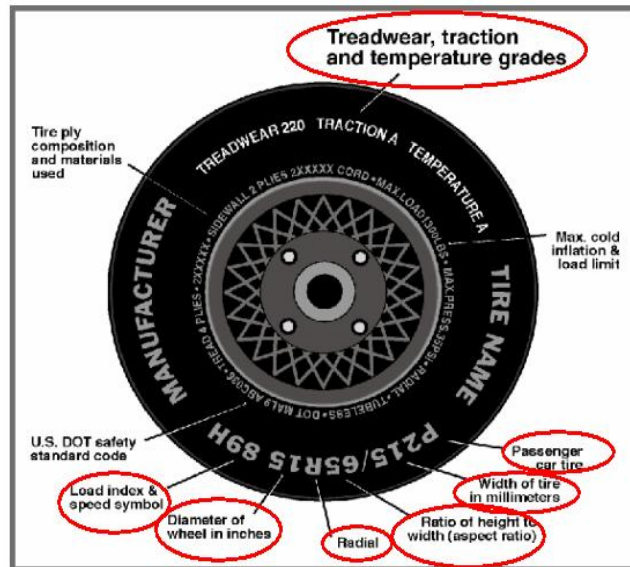

VEHICLE TIRE INFORMATION

Measured Parameter	Front	Rear
Max. Tire Pressure (kpa)	300	300
Cold Pressure (kpa)	220	220
Recommended Tire Size	P245/55R19	P245/55R19
Tire Size on Vehicle	P245/55R19	P245/55R19
Tire Model	Open Country	Open Country
Tire Manufacturer	Toyo	Toyo
Treadwear	300	300
Traction	A	A
Temperature Grades	A	A
Tire Plies Sidewall	2 Polyester	2 Polyester
Tire Plies Body	2 Steel, 2 Polyester, 1 Nylon	2 Steel, 2 Polyester, 1 Nylon
Load Index/Speed Symbol	103S	103S
Tire Material	Steel, Polyester, Nylon	Steel, Polyester, Nylon
DOT Safety Code Right	CXHH H8E 2810	CXHH H8E 2810
DOT Safety Code Left	CXHH H8E 2810	CXHH H8E 2810

DATA SHEET NO. 1 ... (CONTINUED)

GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2011 Toyota Venza 5-Door MPV NHTSA No. MB5128
 Test Program: MDB Side Impact Test Test Date: 12/01/10

TEST VEHICLE WEIGHTS

	Units	As Delivered (UVW)			As Tested (ATW)			Fully Loaded		
		Front	Rear	Total	Front	Rear	Total	Front	Rear	Total
Left	kg	483.0	365.5		522.0	423.0		533.5	422.5	
Right	kg	475.5	360.5		471.0	404.5		475.0	399.5	
Ratio	%	56.9%	43.1%	100.0%	54.5%	45.5%	100.0%	55.1%	44.9%	100.0%
Total	kg	958.5	726.0	1684.5	993.0	827.5	1820.5	1008.5	822.0	1830.5

TARGET TEST WEIGHT CALCULATION

Measured Parameter	Units	Value	
Total Delivered Weight (UVW)	kg	1684.5	A
Actual Weight of 2 P572 ATDs Used	kg	125.0	B
Rated Cargo/Luggage Wt (RCLW)	kg	18.8	C
Calculated Vehicle Target Wt (TVTW)	kg	1828.3	A+B+C

TEST VEHICLE ATTITUDES

Condition	Units	LF	RF	LR	RR	CG (Aft of Front Axle)
Fully Loaded	mm	810	821	822	822	1245
As Tested	mm	817	815	817	821	1260

GENERAL TEST VEHICLE DATA

Measurement Description	Units	Value
Total Vehicle Wheelbase	mm	2773
Total Vehicle Length at Left Side	mm	3339
Total Vehicle Length at Centerline	mm	4760
Total Vehicle Length at Right Side	mm	3338
Weight of Ballast in Cargo Area	kg	54.8
Weight of Vehicle Components Removed	kg	68.0
Amount of Stoddard Solvent in Fuel Tank	L	62.30

Vehicle components removed to make Target Vehicle Test Weight:

Non-struck side door panels and windows (9.5 kg), Non-struck side mirror (1.0 kg), Non-struck side speakers (1.0 kg), Front bumper cover (8.0 kg), Head lights (5.5 kg), Rear bumper cover (4.5 kg), Tail lights (2.5 kg), Spare tire and tools (22.0 kg), Trunk liner (14.0 kg)

TEST VEHICLE VERTICAL IMPACT LINE DATA

Measurement Description	Units	Value
Target Impact Point Aft of Front Axle	mm	445
Actual Impact Point Aft of Front Axle	mm	442

DATA SHEET NO. 2

SEAT ADJUSTMENT, FUEL SYSTEMS, AND STEERING WHEEL DATA

Test Vehicle: 2011 Toyota Venza 5-Door MPV


NHTSA No. MB5128

Test Program: MDB Side Impact Test

Test Date: 12/01/10

NOMINAL DESIGN RIDING POSITION

The driver's seat back is set to the manufacturer's designated seat back angle. The passenger's seat back is set to level the passenger ATD's head transverse instrumentation platform as close as possible. Seat back angles are measured at the headrest posts using a digital inclinometer.

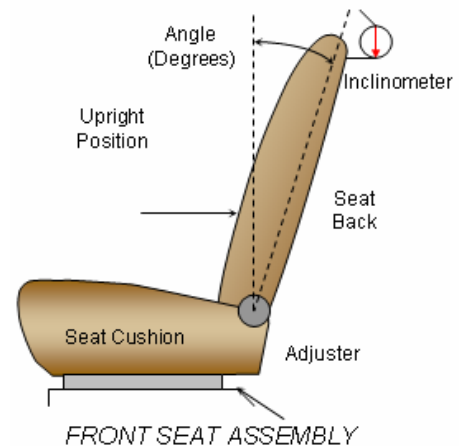

SEAT BACK ANGLES

	Degrees (°)
Driver w/Seated Dummy	3.0
Passenger w/Seated Dummy	3.5

SEAT FORE/AFT POSITION

Seat travel is measured from the forward most possible position to the rear most possible position with the seat set at mid angle and lowest height. The driver's seat is set to the middle of the fore-aft travel. The passenger's seat is fixed.

SEAT FORE/AFT POSITIONS

Seating Position	Total Fore/Aft Travel	Placed in Position
Driver Seat	238 mm	119 mm
Rear Seat	Fixed	Fixed

SEAT BELT UPPER ANCHORAGE

The seat belt upper anchorage is positioned to the manufacturer's design position, the driver for a 50th percentile adult male ATD, the left rear passenger for a 5th percentile adult female ATD. Position zero (0) is the uppermost position. The rear passenger upper anchorage is fixed.

SEAT BELT UPPER ANCHORAGES

Seating Position	Total No. of Positions	Placed in Position
Driver Seat	4	1
Rear Seat	Fixed	Fixed

DATA SHEET NO. 2 ... (CONTINUED)

SEAT ADJUSTMENT, FUEL SYSTEMS, AND STEERING WHEEL DATA

Test Vehicle: 2011 Toyota Venza 5-Door MPV

NHTSA No. MB5128

Test Program: MDB Side Impact Test


Test Date: 12/01/10

FUEL TANK CAPACITY

Description	Liters
Usable Capacity of "Standard Tank"	66.99
Usable Capacity of "Optional Tank"	
Usable Capacity Used for FMVSS 301	66.99
Actual Amount of Stoddard Solvent Used	62.30


FUEL PUMP

The test vehicle is equipped with an electric fuel pump. The fuel pump will run for a couple of seconds after the ignition is switched to the "on" position and will continue to operate while the engine is running. The fuel filler door is located on the left rear fender. The standard fuel tank occupies the area under the rear seat.

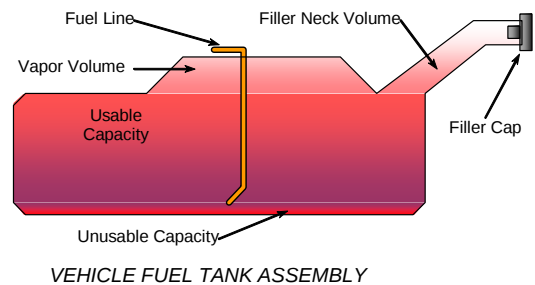

STEERING COLUMN ADJUSTMENT

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes when moved through its full range of motion. A digital inclinometer is used to measure a plate which is placed across the rim of the steering wheel for angular measurements. A tape measure is used with a reference mark on the steering column to measure telescoping travel.

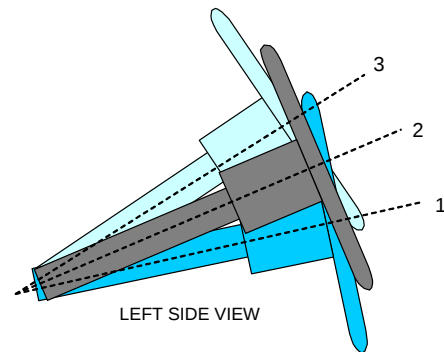

STEERING COLUMN POSITIONING

	Degrees	Fore-Aft Position (mm)
Lowermost Position, No. 1	21.7	20
Geometric Center Position, No. 2	24.1	30
Uppermost Position, No. 3	26.4	40
Telescoping Steering Wheel Travel		20
Test Position	24.0	24

DATA SHEET NO. 3


DUMMY LONGITUDINAL CLEARANCE DIMENSIONS

Test Vehicle: 2011 Toyota Venza 5-Door MPV

NHTSA No. MB5128

Test Program: MDB Side Impact Test

Test Date: 12/01/10

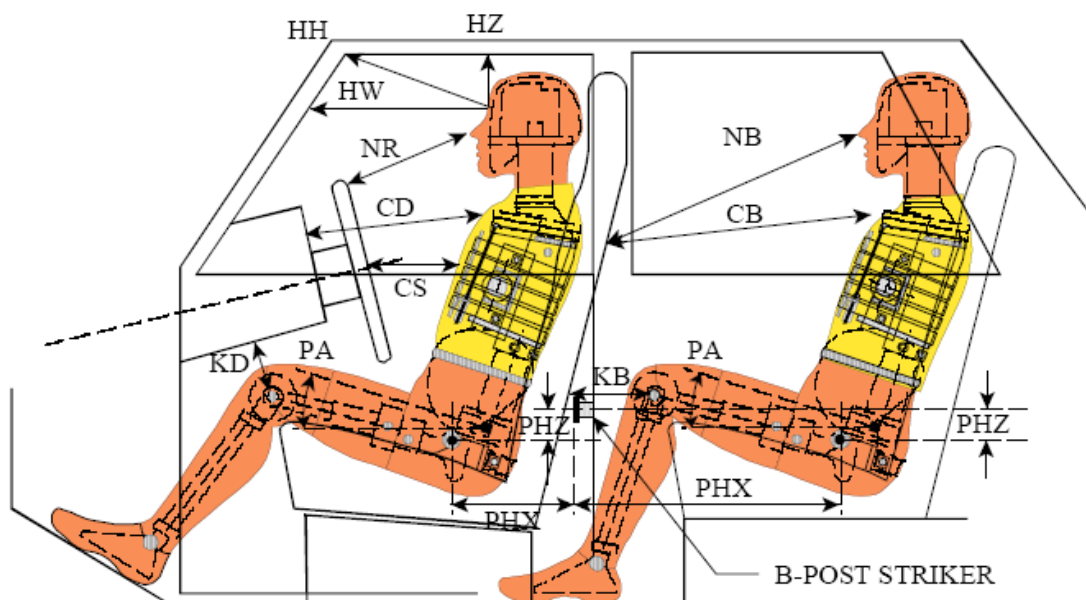

LEFT SIDE VIEW

NOTE: 2-DOOR VEHICLE SHOWN.
REAR DUMMY PHX & PHZ
MEASUREMENTS FOR A 4-DOOR
VEHICLE WOULD USE THE C-POST
STRIKER AS A REFERENCE POINT

DUMMY LONGITUDINAL CLEARANCE DIMENSION INFORMATION

Driver Code	Pass. Code	Description	Driver		Passenger	
			Length (mm)	Angle (°)	Length (mm)	Angle (°)
HH		Head to Header	464	10.6		
HW		Head to Windshield	717	0.0		
HZ	HZ	Head to Roof	205	90.0	300	90.0
NR	NB	Nose to Rim/Seat Back	504	13.6	617	11.2
CD	CB	Chest to Dash/Seat Back	577	6.2	618	5.4
CS		Chest to Steering Wheel	394	7.7		
KDL	KBL	Left Knee to Dash/Seat Back	171	30.8	324	13.9
KDR	KBR	Right Knee to Dash/Seat Back	129	20.3	318	16.4
PA	PA	Pelvic Angle		19.3		21.8
PHX	PHX	H-Point to Striker (x-axis)	201	0.0	250	0.0
PHZ	PHZ	H-Point to Striker (z-axis)	224	90.0	342	90.0
SA	SA	Seat Back Angle		3.0		3.5

DATA SHEET NO. 4


DUMMY LATERAL CLEARANCE DIMENSIONS

Test Vehicle: 2011 Toyota Venza 5-Door MPV

NHTSA No. MB5128

Test Program: MDB Side Impact Test

Test Date: 12/01/10

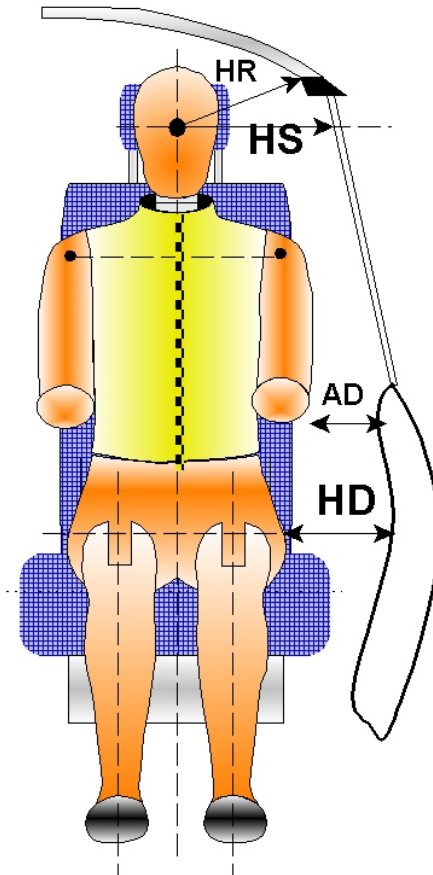

DUMMY LATERAL CLEARANCE DIMENSION INFORMATION

Code	Measurement Description	Units	Driver	Passenger
HR	Head to Side Header	mm	229	290
HS	Head to Side Window	mm	346	403
AD	Arm to Door	mm	134	105
HD	H-Point to Door	mm	156	200

DATA SHEET NO. 5


CAMERA LOCATIONS AND DATA

Test Vehicle: 2011 Toyota Venza 5-Door MPV

NHTSA No. MB5128

Test Program: MDB Side Impact Test

Test Date: 12/01/10

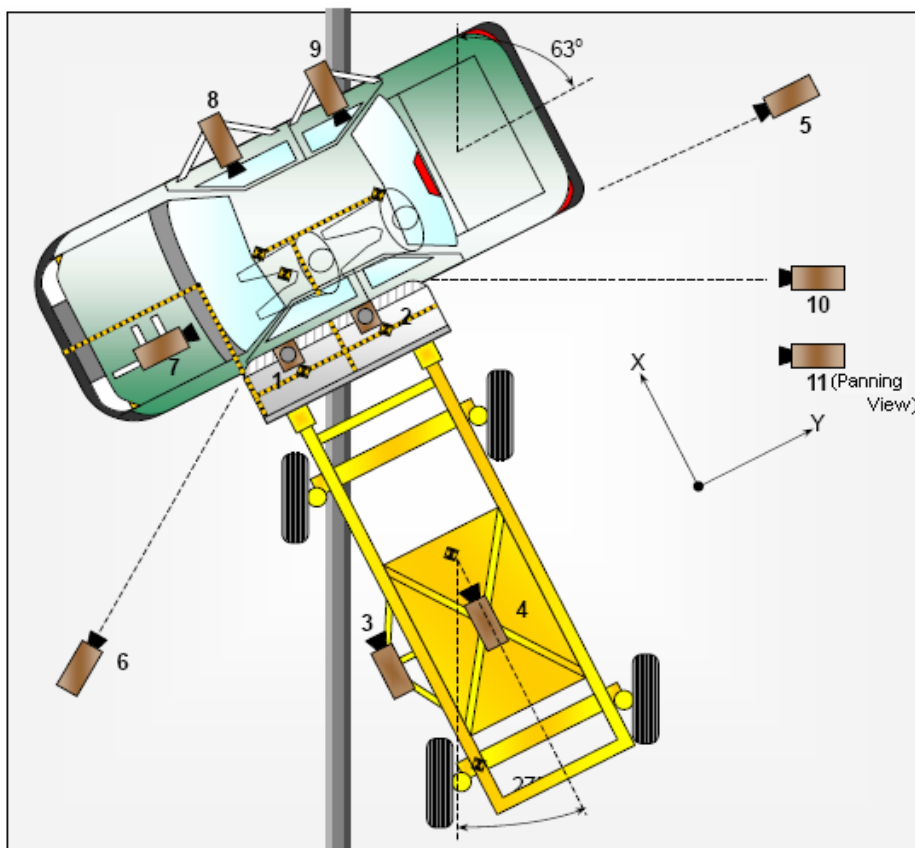

CAMERA LOCATIONS AND DATA

Camera No.	View	Coordinates (mm)			Angle (°)	Lens (mm)	Film Speed (fps)
		X*	Y*	Z*			
1	Overhead Overall	1220	2287	-5486	90	14	1000
2	Overhead Close-Up	609	2287	-5102	90	Zoom	1000
3	Left Impact Point (MDB)	-2134	0	-1143	7.5	25	1000
4	Side Overall (MDB)	-3912	838	-1829	11.9	12	1000
5	Rear	-64	2485	-1348	0	105	1000
6	Left Front	-2266	-3564	-1475	0	24	1000
7	Driver Front (On-Board)	529	-828	-599	4.1	35	1000
8	Driver Side (On-Board)	1738	684	-536	12.5	14	1000
9	Passenger Side (On-Board)	1714	1729	-565	15.1	14	1000
10	Real Time Overall					Zoom	30
11	Real Time Inrun					Zoom	30

Reference: Impact Point Projected to Ground

+X = To Front of MDB, +Y = To Right of MDB, +Z = Down

*All measurements accurate to ± 6 mm

DATA SHEET NO. 6


VEHICLE ACCELEROMETER LOCATIONS

Test Vehicle: 2011 Toyota Venza 5-Door MPV

NHTSA No. MB5128

Test Program: MDB Side Impact Test

Test Date: 12/01/10

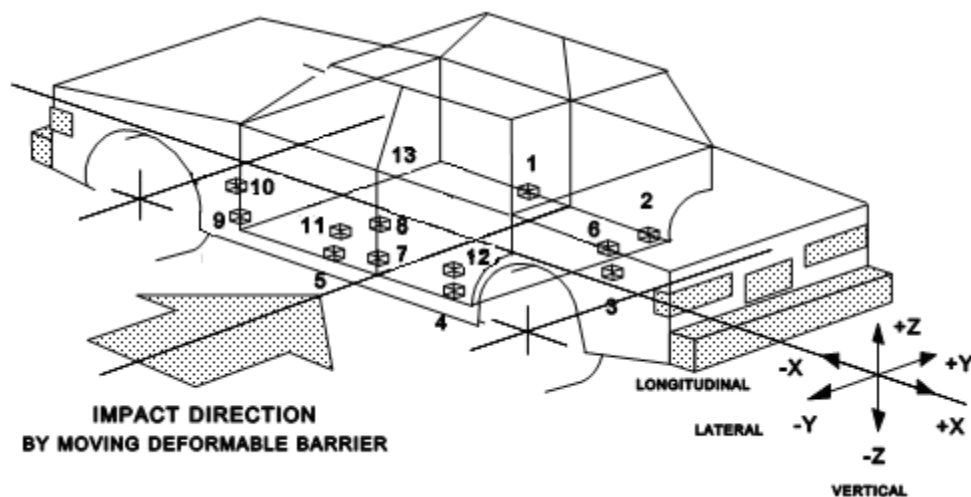

VEHICLE ACCELEROMETER PRE-TEST LOCATIONS

Loc. No.	Sensor Description	Coordinates (mm)		
		X	Y	Z
1	Right Sill at Front Seat	-2998	695	359
2	Right Sill at Rear Seat	-2061	708	231
3	Rear Floorpan Above Axle	-962	-506	617
4	Left Sill at Rear Door	-2075	-767	229
5	Left Sill at Front Door	-2924	-750	229
6	Right Rear Occupant Compartment	-2095	472	298
7	B-Pillar Lower	-2327	-749	630
8	B-Pillar Mid	-2327	-749	865
9	A-Pillar Lower	-3419	-814	647
10	A-Pillar Mid	-3419	-814	891
11	Front Seat Track	-2435	-595	424
12	Rear Seat Structure			
13	Vehicle CG	-2079	0	371

Reference: X – Rear surface of vehicle (+ Forward)
Y – Vehicle centerline (+ To Right)
Z – Ground plane (+ Up)

DATA SHEET NO. 7


MDB ACCELEROMETER LOCATIONS

Test Vehicle: 2011 Toyota Venza 5-Door MPV

NHTSA No. MB5128

Test Program: MDB Side Impact Test

Test Date: 12/01/10

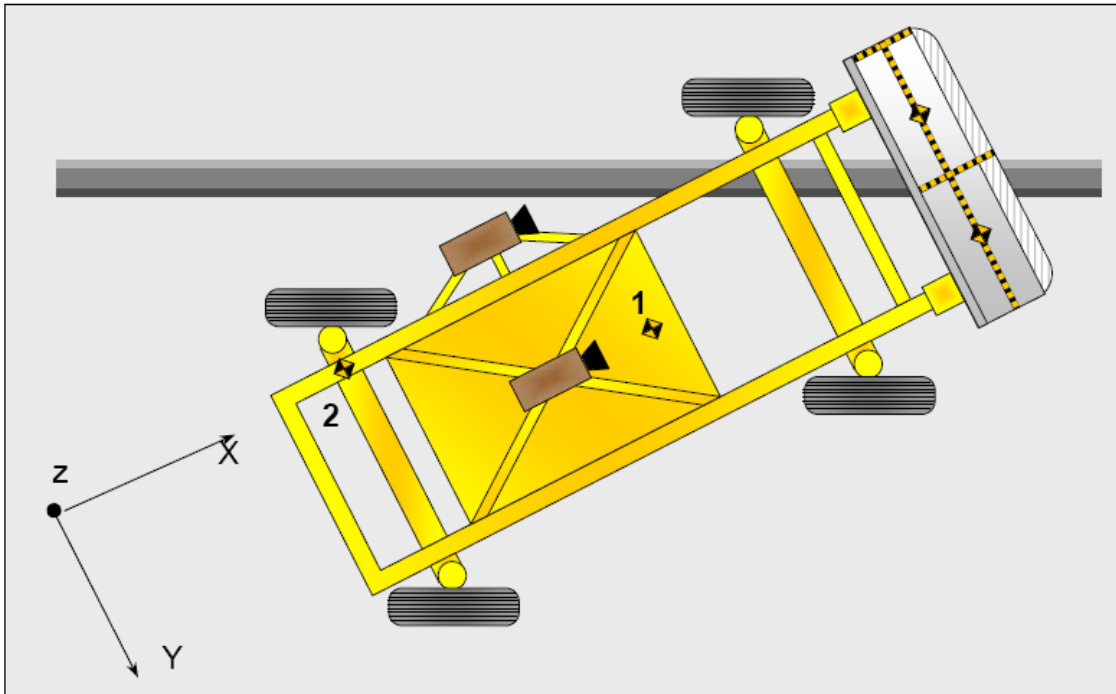

MDB ACCELEROMETER LOCATIONS

Loc. No.	Accelerometer Location	Measurement		
		X	Y	Z
1	MDB CG	-1195	0	-430
2	MDB Rear	-2642	-593	-608

Reference: X – Face of MDB (+ Forward)
Y – MDB centerline (+ To Right)
Z – Ground plane (+ Down)

DATA SHEET NO. 8**TEST VEHICLE SUMMARY OF RESULTS**Test Vehicle: 2011 Toyota Venza 5-Door MPVNHTSA No. MB5128Test Program: MDB Side Impact TestTest Date: 12/01/10**MAXIMUM EXTERIOR CRUSH**

Level	Description	Units	Maximum Crush	Above Ground
1	Sill Top Height	mm	134	328
2	Occupant H-Point Height	mm	242	630
3	Mid-Door Height	mm	258	671
4	Window Sill Height	mm	145	1020
5	Window Top Height	mm	14	1531
	Maximum Penetration	mm	258	

INSTRUMENTATION

Driver Dummy Channels	16
Passenger Dummy Channels	16
Airbag Timing Sensors	4
Vehicle Structure Accelerometers	21
MDB Accelerometers	5
Total No. of Contact Switches	8
Total	70

CAMERA COVERAGE

High-Speed Vehicle On-Board	3
High-Speed Vehicle Off-Board	4
High-Speed MDB On-Board	2
Real Time	2
Total	11

DATA SHEET NO. 9**MOVING DEFORMABLE BARRIER (MDB) SUMMARY OF RESULTS**Test Vehicle: 2011 Toyota Venza 5-Door MPVNHTSA No. MB5128Test Program: MDB Side Impact TestTest Date: 12/01/10**MDB SPECIFICATIONS**

Measurement Description	Length (mm)
Overall Width of Framework Carriage	1251
Overall Length including Honeycomb Face	4023
Wheel Base of Framework Carriage	2595
CG location aft of Front Axle	1118

MDB WEIGHTS

	Units	Front Axle	Rear Axle	Total
Left	kg	402	298	
Right	kg	377	292	
Ratio	%	56.9%	43.1%	
Totals	kg	779	590	1368

SPEED AND IMPACT DATA

Measured Parameter	Units	Requirement	Value
Trap No. 1 Velocity (Primary)	km/h	61.1 to 62.7	62.43
Trap No. 2 Velocity (Redundant)	km/h	61.1 to 62.7	62.45
MDB CL to Target Vehicle CL	degrees	88.5-91.5	89.1

MAXIMUM STATIC CRUSH OF HONEYCOMB FACE

Vertical Location			From Centerline		Max. Crush (mm)
Row	Description	Height (mm)	Distance (mm)	Direction	
1	Center of Bumper	432	800	Right	253
2	Top of Bumper	533	800	Right	158
3	Mid Level	686	200	Right	126
4	Top of Stack	813	800	Left	156

MDB INSTRUMENTATION AND CAMERAS

Accelerometers	5
Contact Switches	2

DATA SHEET NO. 10
POST-TEST OBSERVATIONS

Test Vehicle: 2011 Toyota Venza 5-Door MPV

NHTSA No. MB5128

Test Program: MDB Side Impact Test

Test Date: 12/01/10

TEST DUMMY INFORMATION AND CONTACT POINTS

Description	Front Seat Dummy (ES-2re)	Rear Seat Dummy (SID-IIs)
Dummy Type/Serial No.	ES-2re, S/N: F035	SID-IIs, S/N: 307
Head Contact	Curtain Airbag, Head Restraint	Curtain Airbag, Seat Back, Center Seat Back
Upper Torso Contact	Torso Airbag, Door Panel	Door Panel
Lower Torso Contact	Door Panel	Door Panel
Left Knee Contact	Door Panel	Door Panel, Right Knee
Right Knee Contact	None	Left Knee

POST-TEST DOOR OPENING AND SEAT TRACK INFORMATION

Description	Front	Rear
Left Side Door Opening	Jammed shut	Jammed shut
Right Side Door Opening	Remained closed and operational	Remained closed and operational
Hatch and Other Doors	Remained closed and operational	Remained closed and operational
Seat Movement	None	None
Seatback Failure	No	No

POST-TEST STRUCTURAL OBSERVATIONS

Critical Areas of Performance	Observations and Conclusions	
Pillar Performance	No separation occurred	
Sill Separation	No separation occurred	
Windshield Damage	None	
Window Damage	Broken	Broken
Other Notable Effects	Slight door skin separation	

SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION

Restraint Type	Left Front (Driver) Occupant Location 1		Left Rear (Passenger) Occupant Location 4	
	Installed	Deployed	Installed	Deployed
Frontal Airbag	Yes	No	No	
Knee Airbag	Yes	No	No	
Side Airbag 1 (Torso)	Yes	Yes	No	
Side Airbag 2 (Curtain)	Yes	Yes	Yes	Yes
Seat Belt Pretensioner	Yes	No	No	
Seat Belt Load Limiter	Yes	No	No	
Other				

MDB LEFT EDGE IMPACT POINT DATA

Measured Parameter	Units	Requirement	Value
Horizontal Offset	mm	+/- 50	-3 (Left)
Vertical Offset	mm	+/- 20	-5 (Down)


DATA SHEET NO. 11
VEHICLE PROFILE MEASUREMENTS

Test Vehicle: 2011 Toyota Venza 5-Door MPV

NHTSA No. MB5128

Test Program: MDB Side Impact Test

Test Date: 12/01/10

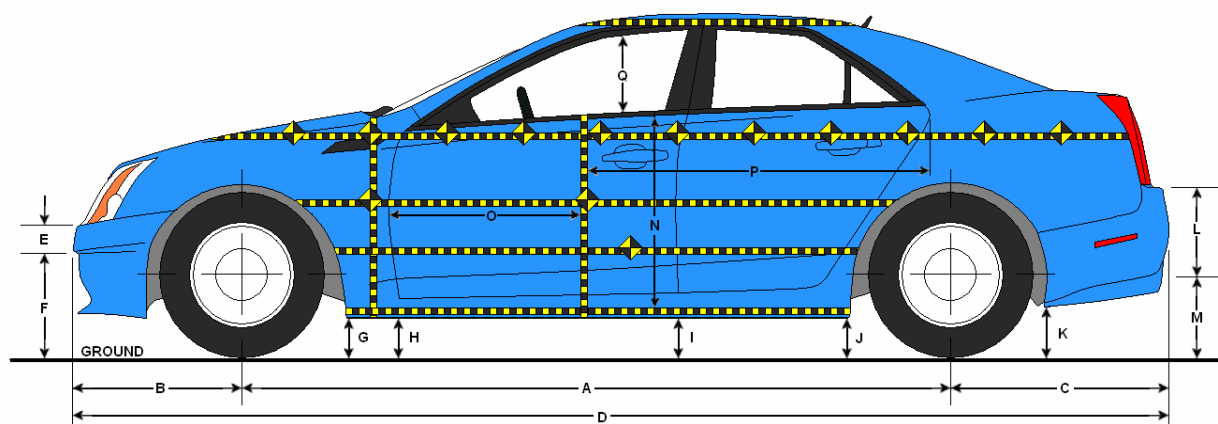

LEFT SIDE VIEW

VEHICLE PRE AND POST-TEST MEASUREMENT INFORMATION

Code	Dimension	Measurement (mm)		
		Pre	Post	Difference
A	Wheelbase	2773	2766	-7
B	Front Axle to FSOV	896	901	5
C	Rear Axle to RSOV	1091	1093	2
D	Total Length at Centerline	4760	4760	0
E	Front Bumper Thickness	118	118	0
F	Front Bumper Bottom to Ground	475	480	5
G	Sill Height at Front Wheel Well	220	225	5
H	Sill Height at Front Door Leading Edge	225	256	31
I	Sill Height at B-Pillar	232	247	15
J1	Sill Height at Rear Wheel Well	219	286	67
J2	Pinch Weld Height at Rear Wheel Well	218	252	34
K	Sill Height Aft of Rear Wheel Well	395	432	37
L	Rear Bumper Thickness	94	92	-2
M	Bottom of Rear Bumper to Ground	466	501	35
N	Sill Height to Window Bottom Sill	702	690	-12
O	Front Door Leading Edge to Impact CL	739	718	-21
P	Rear Door Trailing Edge to Impact CL	1309	1288	-21
Q	Front Window Opening	412	425	13
R	Right Side Length	3338	3417	79
S	Left Side Length	3339	3308	-31
T	Vehicle Width at B-Pillar	1894	1782	-112

All measurements in mm with tolerance of ± 3 mm

DATA SHEET NO. 12


VEHICLE EXTERIOR CRUSH MEASUREMENTS

Test Vehicle: 2011 Toyota Venza 5-Door MPV

NHTSA No. MB5128

Test Program: MDB Side Impact Test

Test Date: 12/01/10

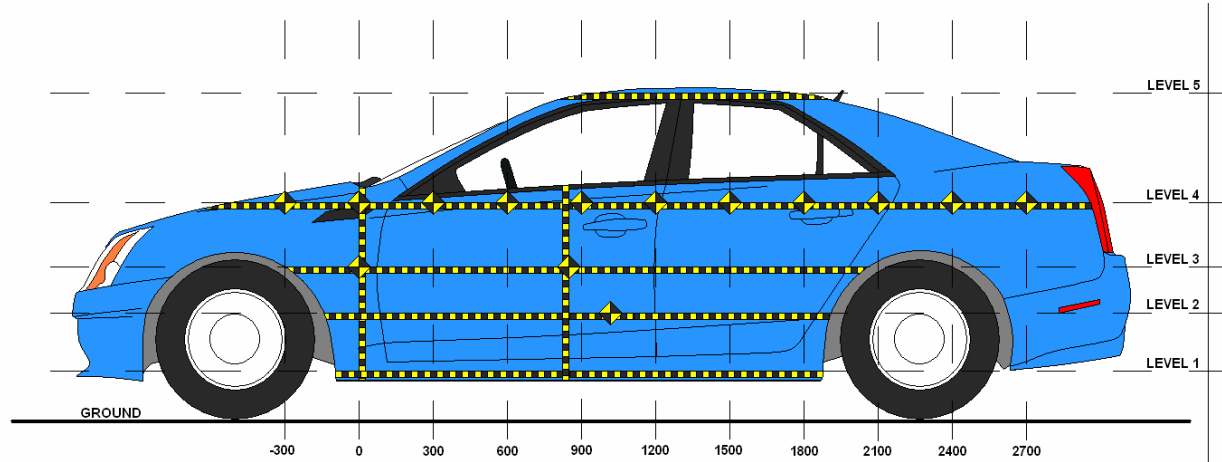

Level	Description	Height Above Ground (mm)
1	Sill Top Height	328
2	Occupant H-Point Height	630
3	Mid-Door Height	671
4	Window Sill Height	1020
5	Window Top Height	1531

DATA SHEET NO. 12 ... (CONTINUED)

VEHICLE EXTERIOR CRUSH MEASUREMENTS

Test Vehicle: 2011 Toyota Venza 5-Door MPV

NHTSA No. MB5128

Test Program: MDB Side Impact Test

Test Date: 12/01/10

	Pre-Test (mm)					Post-Test (mm)					Difference (mm)				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
-900															
-750															
-600															
-450															
-300				653					677					24	
-150				635					658					23	
0	576	551	549	625		608	572	571	653		32	21	22	28	
150	580	555	553	604		600	688	683	639		20	133	130	35	
300	583	556	552	608		610	742	753	696		27	186	201	88	
450	586	556	551	598		615	757	772	743		29	201	221	145	
600	586	556	551	590		623	766	782	735		37	210	231	145	
750	585	559	553	585	879	634	766	785	717	891	49	207	232	132	12
900	586	562	556	581	870	644	774	794	702	884	58	212	238	121	14
1050	586	565	559	578	867	650	767	781	681	881	64	202	222	103	14
1200	588	569	562	578	867	722	753	761	683	879	134	184	199	105	12
1350	592	574	567	579	869	705	790	802	705	880	113	216	235	126	11
1500	593	579	573	582	867	684	810	826	720	879	91	231	253	138	12
1650	594	578	574	585	869	663	820	832	705	880	69	242	258	120	11
1800	593	566	564	589	873	639	794	803	691	883	46	228	239	102	10
1950		558	554	580	878		631	668	658	883		73	114	78	5
2100				595	884				635	890				40	6
2250				607	892				643	897				36	5
2400				612	900				642	906				30	6
2550				614	914				637	918				23	4
2700				622	929				634	929				12	0
2850															

MAXIMUM CRUSH DATA

	Level 1	Level 2	Level 3	Level 4	Level 5
Maximum Crush (mm)	134	242	258	145	14
Distance from Impact (mm)	1200	1650	1650	450	900

DATA SHEET NO. 12 ... (CONTINUED)


VEHICLE EXTERIOR CRUSH MEASUREMENTS

Test Vehicle: 2011 Toyota Venza 5-Door MPV

NHTSA No. MB5128

Test Program: MDB Side Impact Test

Test Date: 12/01/10

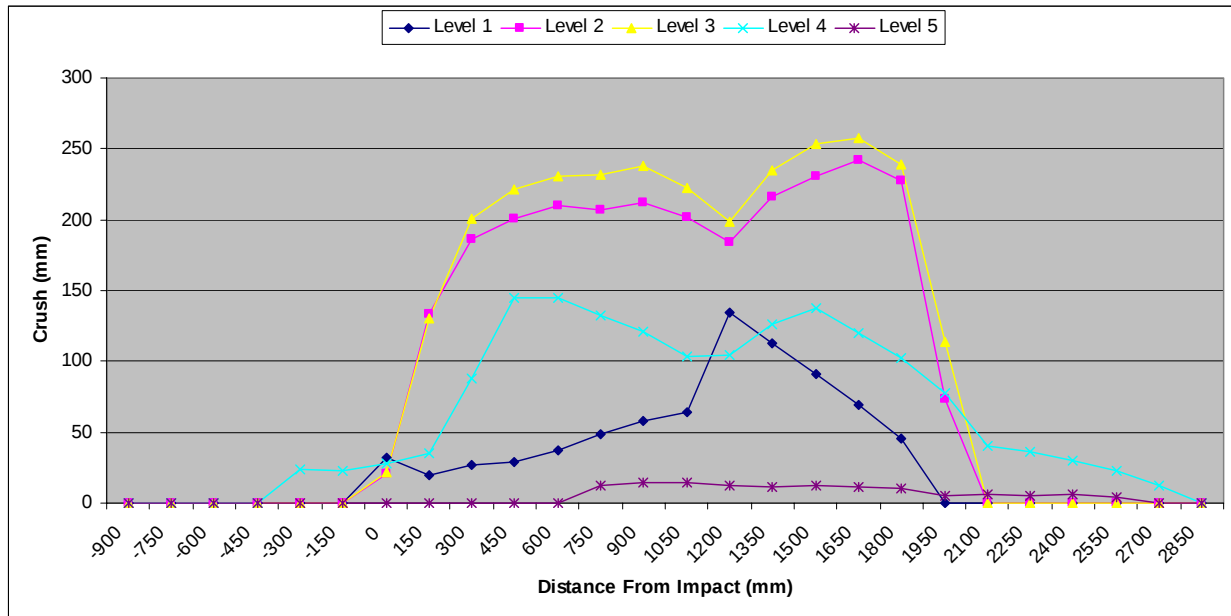

DATA SHEET NO. 13


VEHICLE DAMAGE PROFILE DISTANCES

Test Vehicle: 2011 Toyota Venza 5-Door MPV

NHTSA No. MB5128

Test Program: MDB Side Impact Test

Test Date: 12/01/10

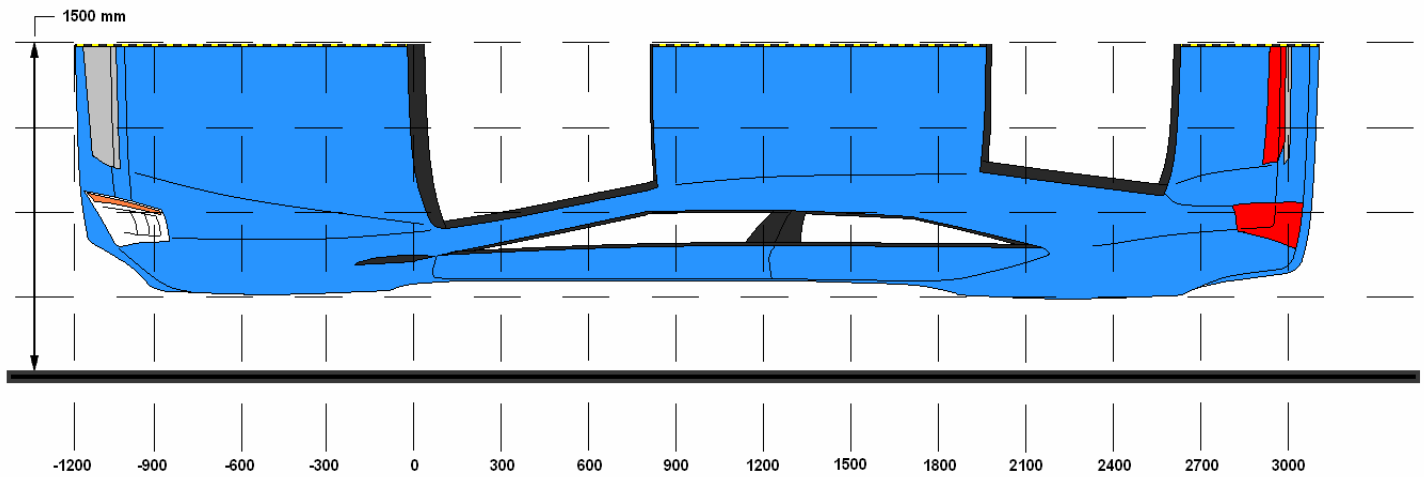

TOP VIEW

DAMAGE PROFILE DISTANCES

DPD	Distance From Impact Point in mm	Level	Pre-Test (mm)	Post-Test (mm)	Max. Static Crush (mm)
1	2700	4	622	634	12
2	2100	4	595	635	40
3	1500	3	573	826	253
4	900	3	556	794	238
5	300	3	552	753	201
6	-300	4	653	677	24

DATA SHEET NO. 14


EXTERIOR STATIC CRUSH FOR IMPACTOR FACE

Test Vehicle: 2011 Toyota Venza 5-Door MPV

NHTSA No. MB5128

Test Program: MDB Side Impact Test

Test Date: 12/01/10

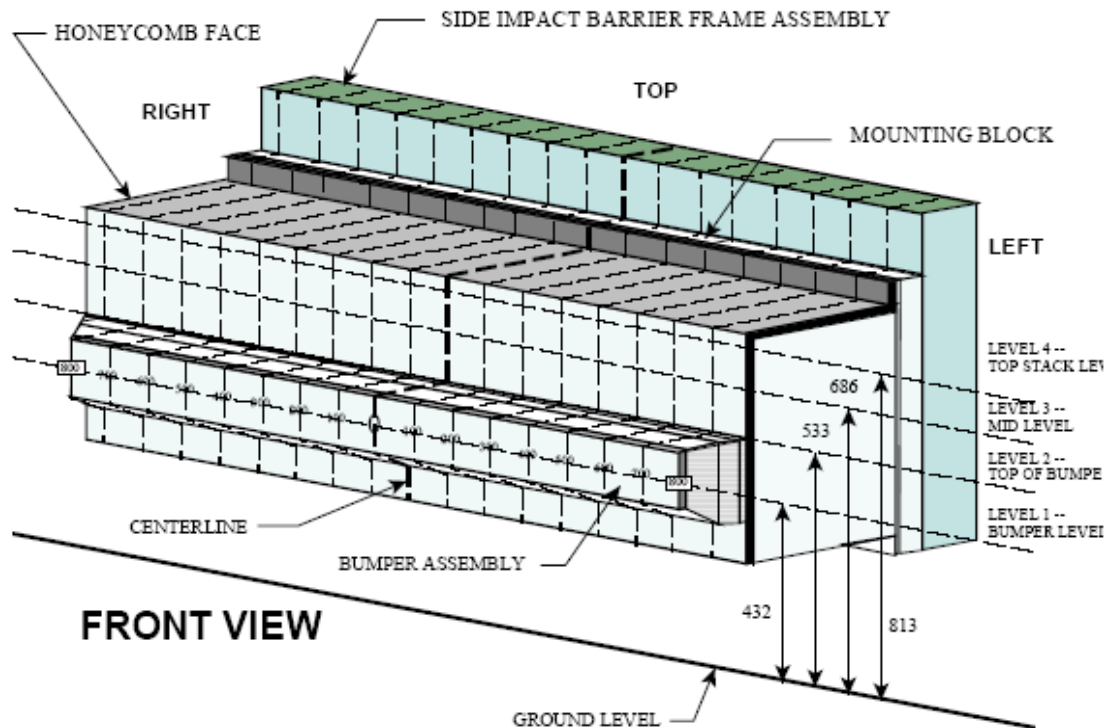

NOTE: Dimensions are shown in millimeters, mm

DEFORMABLE BARRIER STATIC CRUSH

Stack Level	Distance Right of Center								C/L	Distance Left of Center							
	800	700	600	500	400	300	200	100		100	200	300	400	500	600	700	800
1	253	236	228	218	216	211	204	200	191	192	186	181	180	174	167	177	196
2	158	149	137	117	109	104	100	99	95	90	84	86	89	87	87	89	98
3	60	60	58	64	82	84	126	94	61	41	40	38	39	41	51	73	120
4	67	54	46	54	70	94	124	130	89	72	54	55	55	60	81	108	156

All dimensions in millimeters.

DATA SHEET NO. 15

FMVSS NO. 301 FUEL SYSTEM INTEGRITY POST-IMPACT DATA

Test Vehicle: 2011 Toyota Venza 5-Door MPV

NHTSA No. MB5128

Test Program: MDB Side Impact Test


Test Date: 12/01/10

FMVSS 301 FUEL SYSTEM INTEGRITY POST IMPACT DATA

Temperature at Time of Impact: 12.2° C

Test Time: 11:31 AM

- A. From impact until vehicle motion ceases: 0 oz.
(Maximum allowable = 1 oz.)
- B. For the 5 minute period after motion ceases: 0 oz.
(Maximum allowable = 5 oz.)
- C. For the following 25 minutes: 0 oz.
(Maximum allowable = 1 oz./minute)
- D. Spillage Details: No spillage occurred

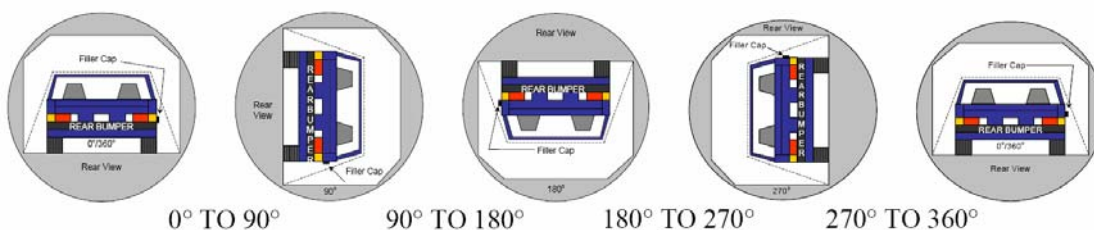

SOLVENT COLLECTION TIME TABLE IN SECONDS

Test Phase	Rotation Time	Hold Time	Total Time
0° To 90°	84	300	384
90° To 180°	82	327	409
180° To 270°	77	408	485
270° To 360°	79	300	379

FMVSS 301 SPILLAGE TABLE

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° To 90°	0			
90° To 180°	0	0		
180° To 270°	0	0	0	
270° To 360°	0			

SOLVENT SPILLAGE LOCATION TABLE

Test Phase	Spillage Location
0° To 90°	None
90° To 180°	None
180° To 270°	None
270° To 360°	None

DATA SHEET NO. 16


DUMMY / VEHICLE TEMPERATURE STABILIZATION

Test Vehicle: 2011 Toyota Venza 5-Door MPV

NHTSA No. MB5128

Test Program: MDB Side Impact Test

Test Date: 12/01/10

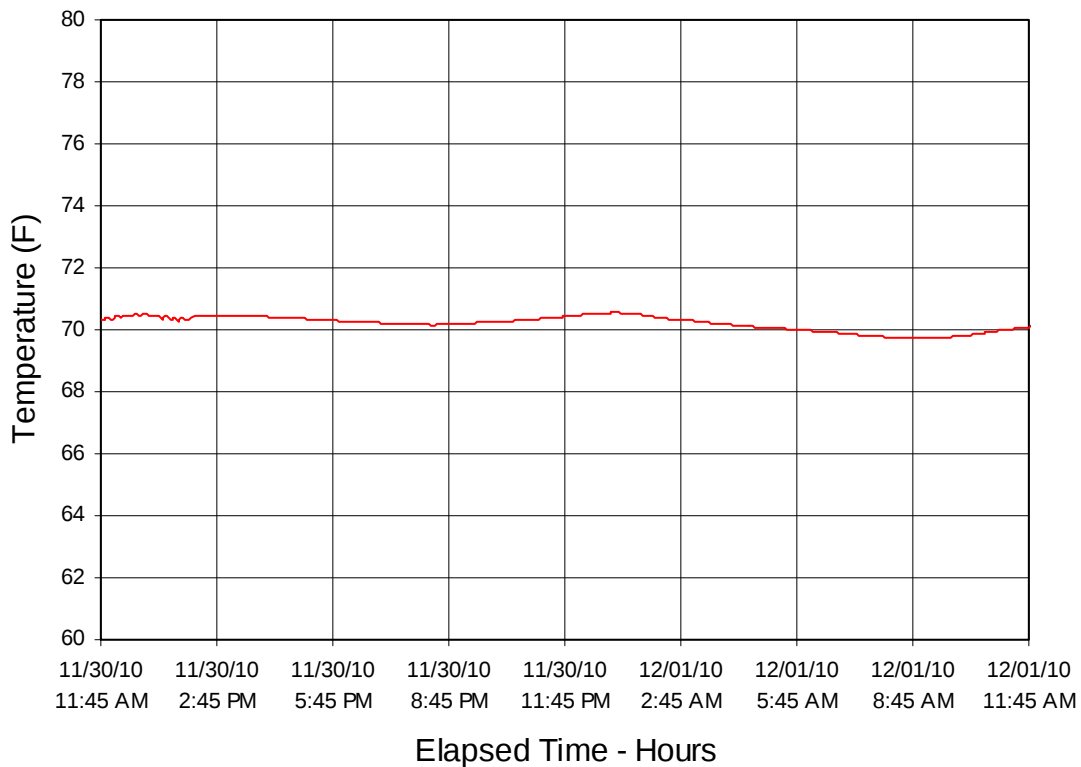

APPENDIX A
PHOTOGRAPHS

TABLE OF PHOTOGRAPHS

Figure		Page
1	As Delivered Right Front Three-Quarter View of Test Vehicle	A-1
2	As Delivered Left Rear Three-Quarter View of Test Vehicle	A-1
3	Pre-Test Frontal View of Test Vehicle	A-2
4	Post-Test Frontal View of Test Vehicle	A-2
5	Pre-Test Left Front Three-Quarter View of Test Vehicle	A-3
6	Post-Test Left Front Three-Quarter View of Test Vehicle	A-3
7	Pre-Test Left Side View of Test Vehicle	A-4
8	Post-Test Left Side View of Test Vehicle	A-4
9	Pre-Test Left Rear Three-Quarter View of Test Vehicle	A-5
10	Post-Test Left Rear Three-Quarter View of Impact Zone	A-5
11	Pre-Test Rear View of Test Vehicle	A-6
12	Post-Test Rear View of Test Vehicle	A-6
13	Pre-Test Right Side View of Test Vehicle	A-7
14	Post-Test Right Side View of Test Vehicle	A-7
15	Pre-Test Overhead View of Test Vehicle with MDB Positioned Against Side of Test Vehicle	A-8
16	Post-Test Overhead View of Test Vehicle and MDB	A-8
17	Pre-Test Left Side View of MDB Positioned Against Side of Test Vehicle	A-9
18	Pre-Test Right Side View of MDB Positioned Against Side of Test Vehicle	A-9
19	Pre-Test Close-Up View of Impact Point Target	A-10
20	Post-Test Close-Up View of Impact Point Target	A-10
21	Pre-Test Left Front Door Latch Close-Up	A-11
22	Post-Test Left Front Door Latch Close-Up	A-11
23	Pre-Test Left Rear Door Latch Close-Up	A-12
24	Post-Test Left Rear Door Latch Close-Up	A-12
25	Pre-Test Front Close-Up View of Driver Dummy	A-13
26	Post-Test Front Close-Up View of Driver Dummy	A-13
27	Pre-Test Left Side View of Driver Dummy Showing Belt, Chalking, and Contact Switches	A-14
28	Pre-Test Left Side View of Driver Dummy Shoulder and Door Top View	A-14
29	Post-Test Left Side View of Driver Dummy Shoulder and Door Top View	A-15
30	Pre-Test Frontal View of Driver Seat Back Prior to Dummy Positioning	A-15
31	Pre-Test Frontal View of Driver Dummy Head and Shoulders in Relation to Head Restraint	A-16
32	Pre-Test Frontal View of Driver Seat Pan Prior to Dummy Positioning	A-16
33	Pre-Test Overhead View of Driver Dummy Thighs on Seat Pan	A-17
34	Pre-Test Placement of Driver Dummy's Feet	A-17
35	Pre-Test View of Belt Anchorage for Driver Dummy	A-18

TABLE OF PHOTOGRAPHS ... (CONTINUED)

Figure		Page
36	Pre-Test Left Side View of Steering Wheel	A-18
37	Pre-Test View of Parking Brake	A-19
38	Pre-Test Close-Up Left Side View of Driver Seat Track	A-19
39	Pre-Test Close-Up Left Side View of Driver Seat Back	A-20
40	Pre-Test Close-Up View of Driver Seat Back or Head Restraint	A-20
41	Pre-Test Driver Dummy and Door Clearance View	A-21
42	Post-Test Driver Dummy and Door Clearance View	A-21
43	Pre-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment	A-22
44	Post-Test Right Side View of Driver Dummy and Front Seat Occupant Compartment	A-22
45	Pre-Test Driver Inner Door Panel View	A-23
46	Post-Test Driver Inner Door Panel View Showing Driver Dummy Contact Locations	A-23
47	Post-Test Driver Dummy Close-Up Head Contact with Vehicle Interior View	A-24
48	Post-Test Driver Dummy Close-Up Head Contact with Side Airbag View	A-24
49	Post-Test Driver Dummy Close-Up Torso Contact with Vehicle Interior View	A-25
50	Post-Test Driver Dummy Close-Up Torso Contact with Side Airbag View	A-25
51	Post-Test Driver Dummy Close-Up Pelvis Contact with Vehicle Interior View	A-26
52	Post-Test Driver Dummy Close-Up Pelvis Contact with Side Airbag View	A-26
53	Pre-Test Left Side View of Rear Passenger Dummy Showing Belt, Chalking, and Contact Switches	A-27
54	Pre-Test Left Side View of Rear Passenger Dummy Shoulder and Door Top View	A-27
55	Post-Test Left Side View of Rear Passenger Dummy Shoulder and Door Top View	A-28
56	Pre-Test Frontal View of Rear Passenger Seat Back Prior to Dummy Positioning	A-28
57	Pre-Test Frontal View of Rear Passenger Dummy Head and Shoulders in Relation to Head Restraint	A-29
58	Pre-Test Overhead View of Rear Passenger Seat Pan Prior to Dummy Positioning	A-29
59	Pre-Test Overhead View of Rear Passenger Dummy Thighs on Seat Pan	A-30
60	Pre-Test View of Rear Passenger Dummy's Neck Showing Position of Adjustable Neck Bracket	A-30
61	Pre-Test View of Rear Passenger Dummy's Head Showing Dummy's Head is Level	A-31
62	Pre-Test Placement of Rear Passenger Dummy's Feet	A-31
63	Pre-Test View of Belt Anchorage for Rear Passenger Dummy	A-32
64	Pre-Test Close-Up Left Side View of Rear Passenger Seat Track	A-32
65	Pre-Test Close-Up Left Side View of Rear Passenger Seat Back	A-33
66	Pre-Test Close-Up View of Rear Passenger Seat Back or Head Restraint	A-33
67	Pre-Test Rear Passenger Dummy and Door Clearance View	A-34
68	Post-Test Rear Passenger Dummy and Door Clearance View	A-34
69	Pre-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment	A-35
70	Post-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment	A-35

TABLE OF PHOTOGRAPHS ... (CONTINUED)

Figure		Page
71	Pre-Test Rear Passenger Inner Door Panel View	A-36
72	Post-Test Rear Passenger Inner Door Panel View Showing Dummy Contact Locations	A-36
73	Post-Test Rear Passenger Dummy Close-Up Head Contact with Vehicle Interior View	A-37
74	Post-Test Rear Passenger Dummy Close-Up Head Contact with Side Airbag View	A-37
75	Post-Test Rear Passenger Dummy Close-Up Torso Contact with Vehicle Interior View	A-38
76	Post-Test Rear Passenger Dummy Close-Up Torso Contact with Side Airbag View	A-38
77	Post-Test Rear Passenger Dummy Close-Up Pelvis Contact with Vehicle Interior View	A-39
78	Post-Test Rear Passenger Dummy Close-Up Pelvis Contact with Side Airbag View	A-39
79	Pre-Test View of Fuel Filler Cap or Fuel Filler Neck	A-40
80	Post-Test View of Fuel Filler Cap or Fuel Filler Neck	A-40
81	Pre-Test Front View of MDB Impactor Face	A-41
82	Post-Test Front View of MDB Impactor Face	A-41
83	Pre-Test Top View of MDB Impactor Face	A-42
84	Post-Test Top View of MDB Impactor Face	A-42
85	Pre-Test Left Side View of MDB Impactor Face	A-43
86	Post-Test Left Side View of MDB Impactor Face	A-43
87	Pre-Test Right Side View of MDB Impactor Face	A-44
88	Post-Test Right Side View of MDB Impactor Face	A-44
89	Close-Up View of Vehicle's Certification Label	A-45
90	Close-Up View of Vehicle's Tire Information Placard or Label	A-45
91	Pre-Test Ballast View	A-46
92	Post-Test Primary and Redundant Speed Trap Read-Out	A-46
93	FMVSS No. 301-305 Rollover 0 Degrees	A-47
94	FMVSS No. 301-305 Rollover 90 Degrees	A-47
95	FMVSS No. 301-305 Rollover 180 Degrees	A-48
96	FMVSS No. 301-305 Rollover 270 Degrees	A-48
97	FMVSS No. 301-305 Rollover 360 Degrees	A-49
98	Impact Event	A-49
99	Monroney Label	A-50
100	Driver Head Restraint Use and Adjustment Information from Vehicle Manual	A-50
101	Left Rear Passenger Head Restraint Use and Adjustment Information from Vehicle Manual	A-51



FIGURE 1. As-Delivered Right Front Three-Quarter View of Test Vehicle



FIGURE 2. As-Delivered Left Rear Three-Quarter View of Test Vehicle

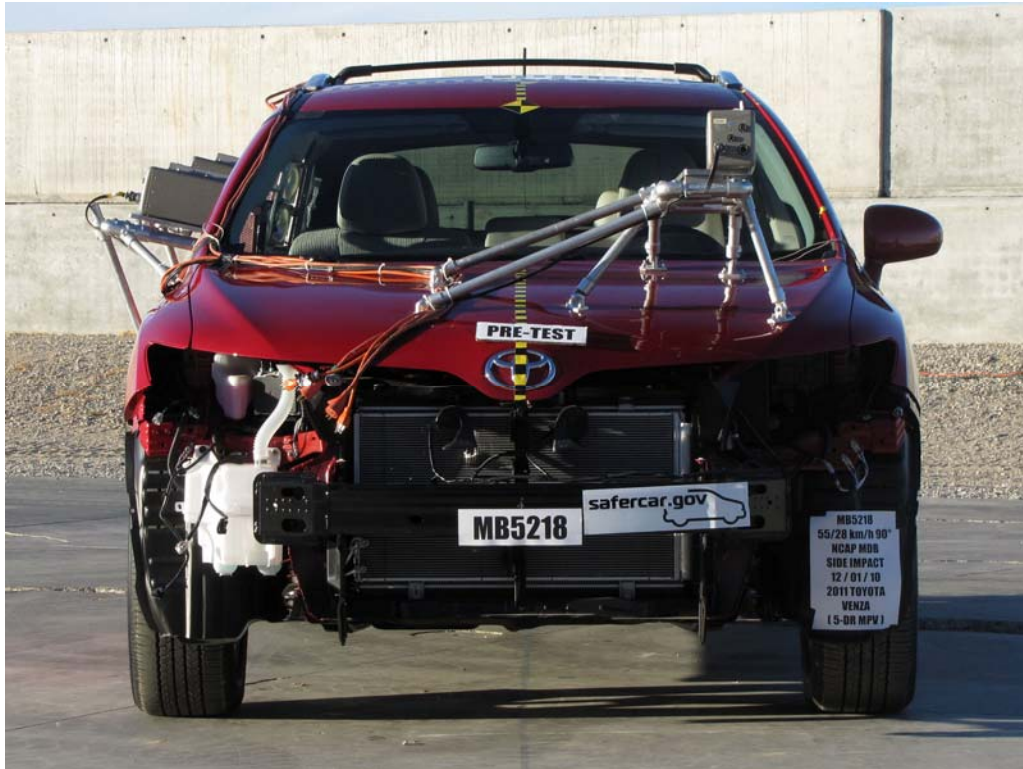


FIGURE 3. Pre-Test Frontal View of Test Vehicle



FIGURE 4. Post-Test Frontal View of Test Vehicle



FIGURE 5. Pre-Test Left Front Three-Quarter View of the Test Vehicle



FIGURE 6. Post-Test Left Front Three-Quarter View of the Test Vehicle



FIGURE 7. Pre-Test Left Side View of Test Vehicle



FIGURE 8. Post-Test Left Side View of Test Vehicle



FIGURE 9. Pre-Test Left Rear Three-Quarter View of Test Vehicle



FIGURE 10. Post-Test Left Rear Three-Quarter View of Impact Zone



FIGURE 11. Pre-Test Rear View of Test Vehicle



FIGURE 12. Post-Test Rear View of Test Vehicle



FIGURE 13. Pre-Test Right Side View of Test Vehicle



FIGURE 14. Post-Test Right Side View of Test Vehicle



FIGURE 15. Pre-Test Overhead View of Test Vehicle
with MDB Positioned Against Side of Test Vehicle



FIGURE 16. Post-Test Overhead View of Test Vehicle and MDB



FIGURE 17. Pre-Test Left Side View of MDB Positioned
Against Side of Test Vehicle at Ideal Impact Point



FIGURE 18. Pre-Test Right Side View of MDB Positioned
Against Side of Test Vehicle at Ideal Impact Point



FIGURE 19. Pre-Test Close-Up View of Impact Point Target



FIGURE 20. Post-Test Close-Up View of Impact Point Target
Showing Impact Point Location



FIGURE 21. Pre-Test Left Front Door Latch Close-Up



FIGURE 22. Post-Test Left Front Door Latch Close-Up



FIGURE 23. Pre-Test Left Rear Door Latch Close-Up



FIGURE 24. Post-Test Left Rear Door Latch Close-Up



FIGURE 25. Pre-Test Front Close-Up View of Driver Dummy



FIGURE 26. Post-Test Front Close-Up View of Driver Dummy



FIGURE 27. Pre-Test Left Side View of Driver Dummy
Showing Belt, Chalking, and Contact Switches



FIGURE 28. Pre-Test Left Side View of Driver Dummy Shoulder and Door Top View



FIGURE 29. Post-Test Left Side View of Driver Dummy Shoulder and Door Top View



FIGURE 30. Pre-Test Frontal View of Driver Seat Back Prior to Dummy Positioning



FIGURE 31. Pre-Test Frontal View of Driver Dummy Head and Shoulders in Relation to Head Restraint



FIGURE 32. Pre-Test Frontal View of Driver Seat Pan Prior to Dummy Positioning



FIGURE 33. Pre-Test Overhead View of Driver Dummy Thighs on Seat Pan



FIGURE 34. Pre-Test Placement of Driver Dummy's Feet

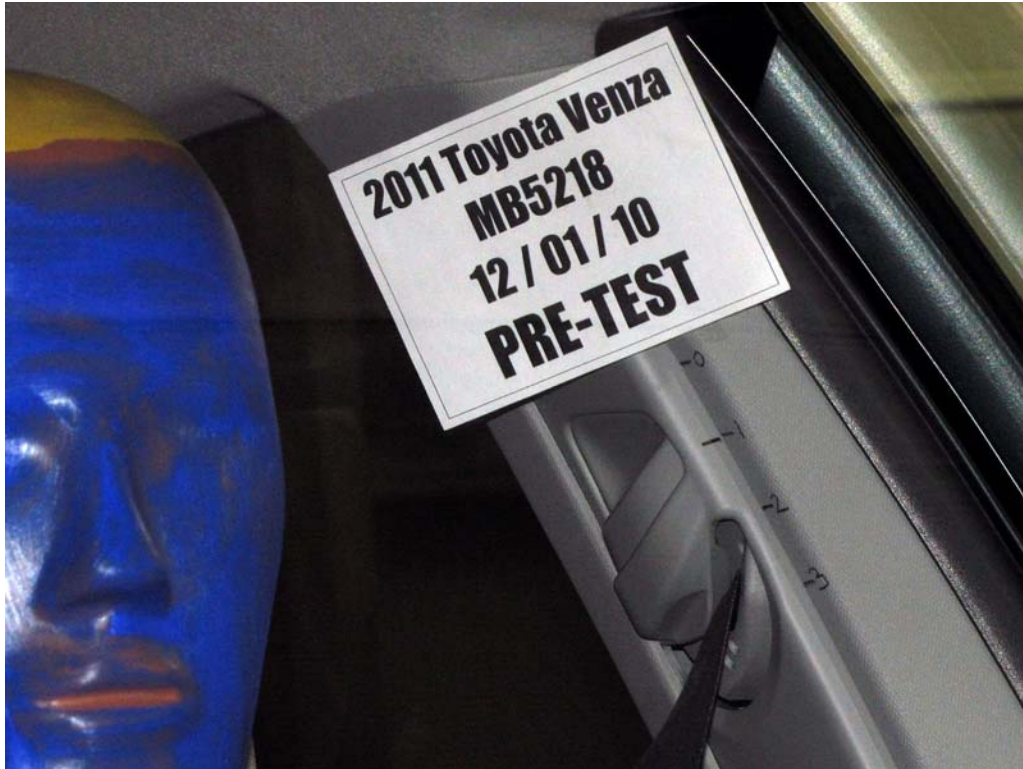


FIGURE 35. Pre-Test View of Belt Anchorage for Driver Dummy



FIGURE 36. Pre-Test Left Side View of Steering Wheel



FIGURE 37. Pre-Test View of Parking Brake



FIGURE 38. Pre-Test Close-Up Left Side View of Driver Seat Track



FIGURE 39. Pre-Test Close-Up Left Side View of Driver Seat Back



FIGURE 40. Pre-Test Close-Up View of Driver Seat Back or Head Restraint



FIGURE 41. Pre-Test Driver Dummy and Door Clearance View



FIGURE 42. Post-Test Driver Dummy and Door Clearance View



FIGURE 43. Pre-Test Right Side View of Driver Dummy and Front Seat Occupant Compartment



FIGURE 44. Post-Test Right Side View of Driver Dummy and Front Seat Occupant Compartment



FIGURE 45. Pre-Test Driver Inner Door Panel View



FIGURE 46. Post-Test Driver Dummy Inner Door Panel View
Showing Driver Dummy Contact Locations



FIGURE 47. Post-Test Driver Dummy Close-Up Head Contact with Vehicle Interior View



FIGURE 48. Post-Test Driver Dummy Close-Up Head Contact with Side Airbag View

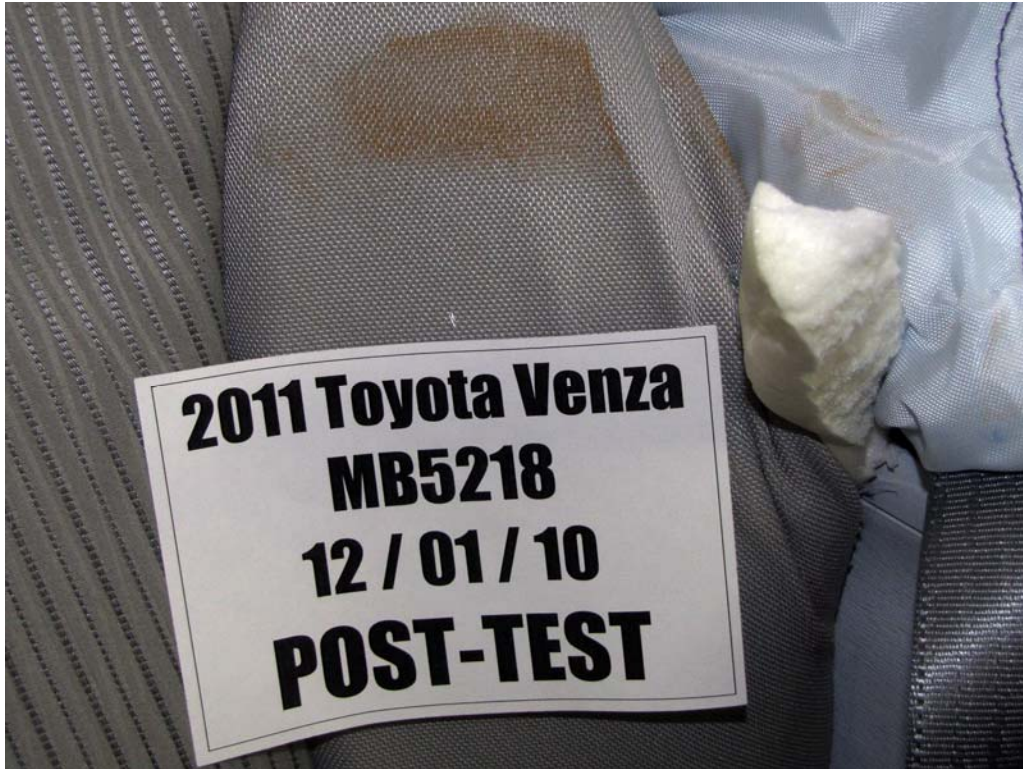


FIGURE 49. Post-Test Driver Dummy Close-Up Torso Contact with Vehicle Interior View



FIGURE 50. Post-Test Driver Dummy Close-Up Torso Contact with Side Airbag View



FIGURE 51. Post-Test Driver Dummy Close-Up Pelvis Contact with Vehicle Interior View

Photograph Not Applicable

No Dummy Pelvis Contact
With Side Airbag

FIGURE 52. Post-Test Driver Dummy Close-Up Pelvis Contact with Side Airbag View



FIGURE 53. Pre-Test Left Side View of Rear Passenger Dummy
Showing Belt, Chalking, and Contact Switches



FIGURE 54. Pre-Test Left Side View of Rear Passenger Dummy
Shoulder and Door Top View



FIGURE 55. Post-Test Left Side View of Rear Passenger Dummy
Shoulder and Door Top View



FIGURE 56. Pre-Test Frontal View of Rear Passenger Seat Back Prior to Dummy Positioning



FIGURE 57. Pre-Test Frontal View of Rear Passenger Dummy
Head and Shoulders in Relation to Head Restraint



FIGURE 58. Pre-Test Overhead View of Rear Passenger
Seat Pan Prior to Dummy Positioning



FIGURE 59. Pre-Test Overhead View of Rear Passenger Dummy Thighs on Seat Pan



FIGURE 60. Pre-Test View of Rear Passenger Dummy's Neck
Showing Position of Adjustable Neck Bracket



FIGURE 61. Pre-Test View of Rear Passenger Dummy's Head
Showing Dummy's Head is Level



FIGURE 62. Pre-Test Placement of Rear Passenger Dummy's Feet



FIGURE 63. Pre-Test View of Belt Anchorage for Rear Passenger Dummy

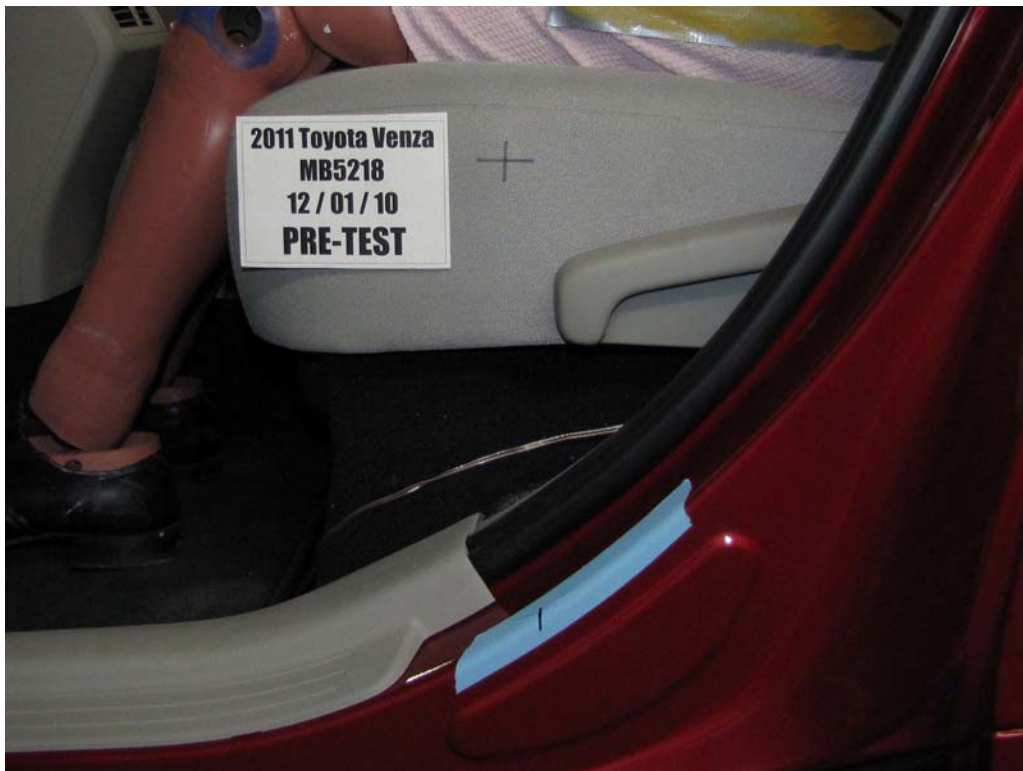


FIGURE 64. Pre-Test Close-Up Left Side View of Rear Passenger Seat Track



FIGURE 65. Pre-Test Close-Up Left Side View of Rear Passenger Seat Back



FIGURE 66. Pre-Test Close-Up View of Rear Passenger Seat Back or Head Restraint



FIGURE 67. Pre-Test Rear Passenger Dummy and Door Clearance View



FIGURE 68. Post-Test Rear Passenger Dummy and Door Clearance View



FIGURE 69. Pre-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment



FIGURE 70. Post-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment



FIGURE 71. Pre-Test Rear Passenger Inner Door Panel View



FIGURE 72. Post-Test Rear Passenger Inner Door Panel View
Showing Rear Passenger Dummy Contact Locations



FIGURE 73. Post-Test Rear Passenger Dummy Close-Up
Head Contact with Vehicle Interior View



FIGURE 74. Post-Test Rear Passenger Dummy Close-Up
Head Contact with Side Airbag View



FIGURE 75. Post-Test Rear Passenger Dummy Close-Up
Torso Contact with Vehicle Interior View

Photograph Not Applicable

Vehicle Not Equipped
with Rear Side Airbag

FIGURE 76. Post-Test Rear Passenger Dummy Close-Up
Torso Contact with Side Airbag View



FIGURE 77. Post-Test Rear Passenger Dummy Close-Up
Pelvis Contact with Vehicle Interior View

Photograph Not Applicable

Vehicle Not Equipped
with Rear Side Airbag

FIGURE 78. Post-Test Rear Passenger Dummy Close-Up
Pelvis Contact with Side Airbag View



FIGURE 79. Pre-Test View of Fuel Filler Cap



FIGURE 80. Post-Test View of Fuel Filler Cap



FIGURE 81. Pre-Test Front View of MDB Impactor Face



FIGURE 82. Post-Test Front View of MDB Impactor Face



FIGURE 83. Pre-Test Top View of MDB Impactor Face



FIGURE 84. Post-Test Top View of MDB Impactor Face



FIGURE 85. Pre-Test Left Side View of MDB Impactor Face



FIGURE 86. Post-Test Left Side View of MDB Impactor Face



FIGURE 87. Pre-Test Right Side View of MDB Impactor Face



FIGURE 88. Post-Test Right Side View of MDB Impactor Face



FIGURE 89. Close-Up View of Vehicle's Certification Label



FIGURE 90. Close-Up View of Vehicle's Tire Information Placard

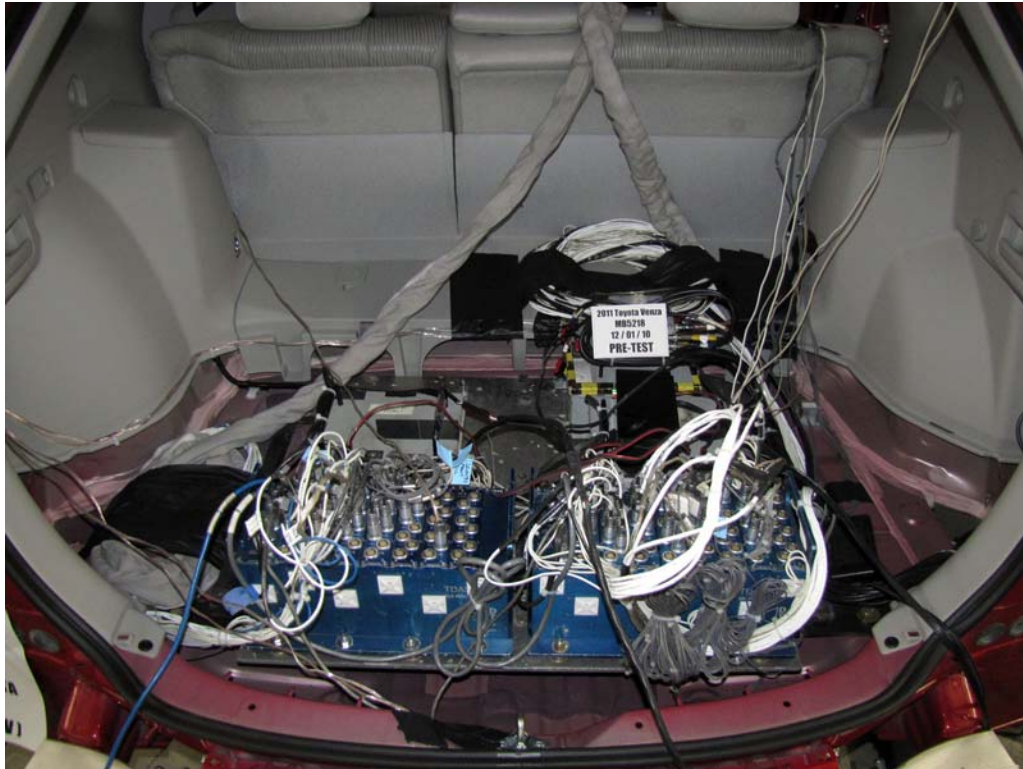


FIGURE 91. Pre-Test Ballast View

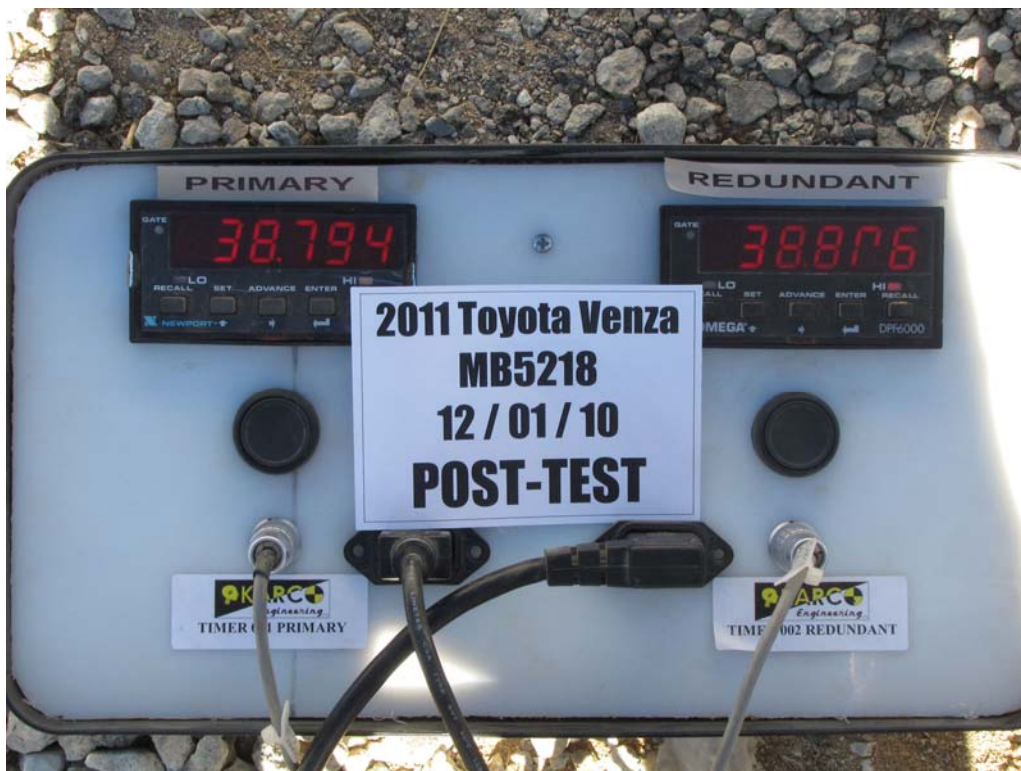


FIGURE 92. Post-Test Primary and Redundant Speed Trap Read-Out



FIGURE 93. FMVSS No. 301/305 Rollover 0 Degrees



FIGURE 94. FMVSS No. 301/305 Rollover 90 Degrees



FIGURE 97. FMVSS No. 301/305 Rollover 360 Degrees



FIGURE 98. Impact Event

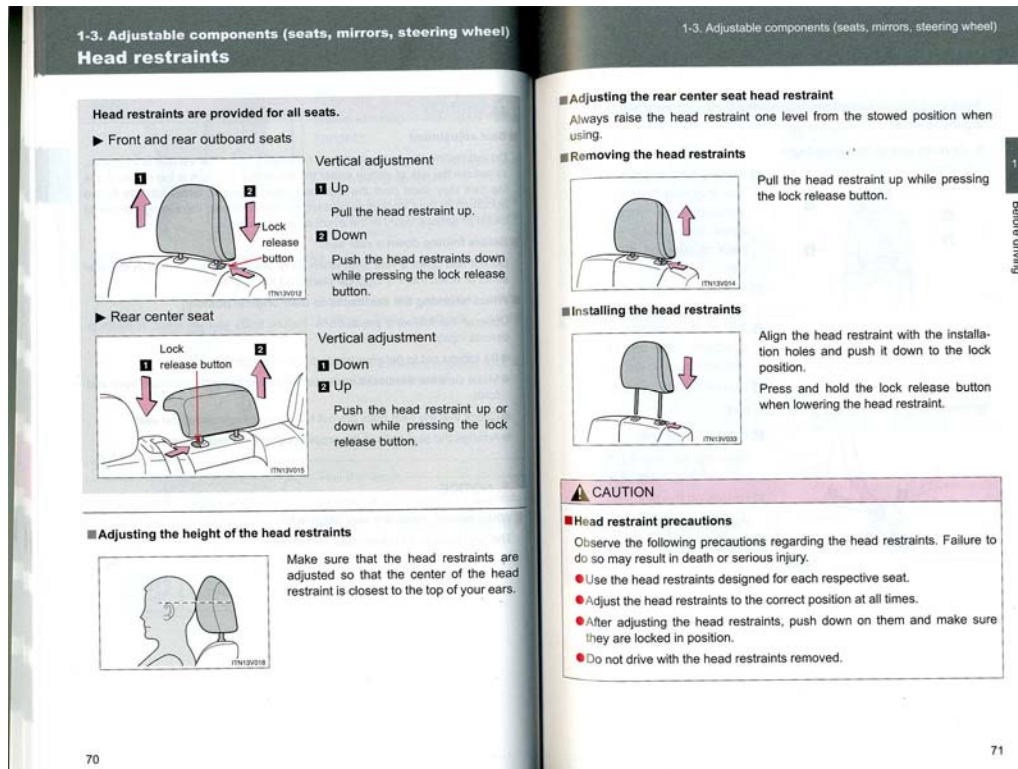


FIGURE 101. Left Rear Passenger Head Restraint Use and Adjustment
Information from Vehicle Manual

APPENDIX B
DUMMY RESPONSE DATA

TABLE OF DATA PLOTS

Plot		Page
1	Driver Head Acceleration (X) Primary vs. Time	B-1
2	Driver Head Acceleration (Y) Primary vs. Time	B-1
3	Driver Head Acceleration (Z) Primary vs. Time	B-1
4	Driver Head Resultant Acceleration Primary vs. Time	B-1
5	Driver Upper Thorax Rib Deflection (Y) vs. Time	B-2
6	Driver Middle Thorax Rib Deflection (Y) vs. Time	B-2
7	Driver Lower Thorax Rib Deflection (Y) vs. Time	B-2
8	Driver Thorax Rib Deflection Maximum vs. Time	B-2
9	Driver Anterior Abdominal Force (Y) vs. Time	B-3
10	Driver Middle Abdominal Force (Y) vs. Time	B-3
11	Driver Posterior Abdominal Force (Y) vs. Time	B-3
12	Driver Total Abdominal Force (Y) vs. Time	B-3
13	Driver Pubic Symphysis Force (Y) vs. Time	B-4
14	Passenger Head Acceleration (X) vs. Time Primary	B-5
15	Passenger Head Acceleration (Y) vs. Time Primary	B-5
16	Passenger Head Acceleration (Z) vs. Time Primary	B-5
17	Passenger Head Resultant Acceleration Primary vs. Time	B-5
18	Passenger Lower Spine T12 Acceleration (X) vs. Time	B-6
19	Passenger Lower Spine T12 Acceleration (Y) vs. Time	B-6
20	Passenger Lower Spine T12 Acceleration (Z) vs. Time	B-6
21	Passenger Lower Spine T12 Resultant Acceleration vs. Time	B-6
22	Passenger Iliac Force on Impact Side (Y) vs. Time	B-7
23	Passenger Acetabulum Force on Impact Side (Y) vs. Time	B-7
24	Passenger Total Pelvic Force on Impact Side (Y) vs. Time	B-7

The following additional data for this test can be obtained from the Research and Development section of the NHTSA website. The website can be found at

www.NHTSA.dot.gov.

Driver & Passenger Dummy Instrumentation Data

Driver Lower Spine T12 Acceleration (X)

Driver Lower Spine T12 Acceleration (Y)

Driver Lower Spine T12 Acceleration (Z)

Passenger Upper Thorax Rib Deflection (Y)

Passenger Middle Thorax Rib Deflection (Y)

Passenger Lower Thorax Rib Deflection (Y)
Passenger Upper Abdomen Rib Deflection (Y)
Passenger Lower Abdomen Rib Deflection (Y)
Driver Head Acceleration Redundant (X)
Driver Head Acceleration Redundant (Y)
Driver Head Acceleration Redundant (Z)
Driver Shoulder Contact Switch
Driver Torso Contact Switch
Driver Pelvis Contact Switch
Passenger Head Acceleration Redundant (X)
Passenger Head Acceleration Redundant (Y)
Passenger Head Acceleration Redundant (Z)
Passenger Shoulder Contact Switch
Passenger Torso Contact Switch
Passenger Pelvis Contact Switch

Vehicle Instrumentation Data

Driver Side Airbag Timing
Driver Side Curtain Airbag Timing
Passenger Side Airbag Timing (if applicable)
Passenger Side Curtain Airbag Timing (if different from Driver)
Right Side Sill at Front Seat Acceleration (X)
Right Side Sill at Front Seat Acceleration (Y)
Right Side Sill at Front Seat Acceleration (Z)
Right Side Sill at Rear Seat Acceleration (X)
Right Side Sill at Rear Seat Acceleration (Y)
Right Side Sill at Rear Seat Acceleration (Z)
Rear Floorpan Above Axle Acceleration (X)
Rear Floorpan Above Axle Acceleration (Y)
Rear Floorpan Above Axle Acceleration (Z)
Left Side Sill at Front Seat Acceleration (Y)
Left Side Sill at Rear Seat Acceleration (Y)
Right Rear Occupant Compartment Acceleration (Y)
Lower A-Post Acceleration (Y)
Upper A-Post Acceleration (Y)
Lower B-Post Acceleration (Y)
Upper B-Post Acceleration (Y)


Front Seat Track Acceleration (Y)
Rear Seat Track Acceleration (Y)
Vehicle Center of Gravity Acceleration (X)
Vehicle Center of Gravity Acceleration (Y)
Vehicle Center of Gravity Acceleration (Z)

MDB Instrumentation Data


MDB Center of Gravity Acceleration (X)
MDB Center of Gravity Acceleration (Y)
MDB Center of Gravity Acceleration (Z)
MDB Rear Acceleration (X)
MDB Rear Acceleration (Y)
Left MDB Contact Switch
Right MDB Contact Switch

Test Vehicle: 2011 Toyota Venza 5-Door MPV
 Test Program: 61 km/h (38 mph) Side Impact NCAP 27° Moving Deformable Barrier Test


Test Date: 12/1/10
 NHTSA No.: MB5128

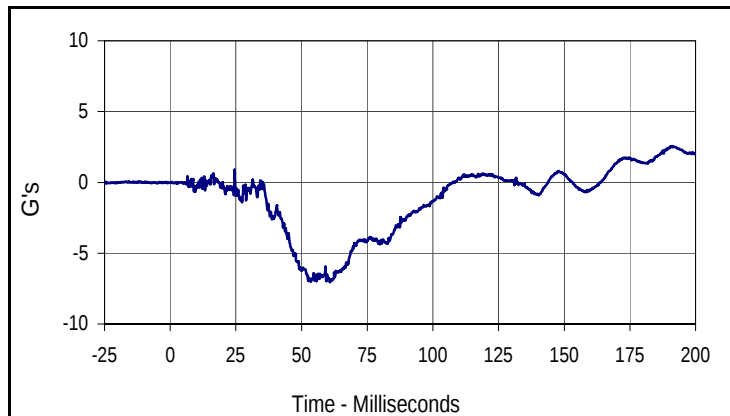


Curve Description			
Driver Head Acceleration X Primary			
CURNO	Type	SAE Class	Units
001	FIL	1000	G's
Max	Time	Min	Time
2.6	191.1	-7.0	60.8

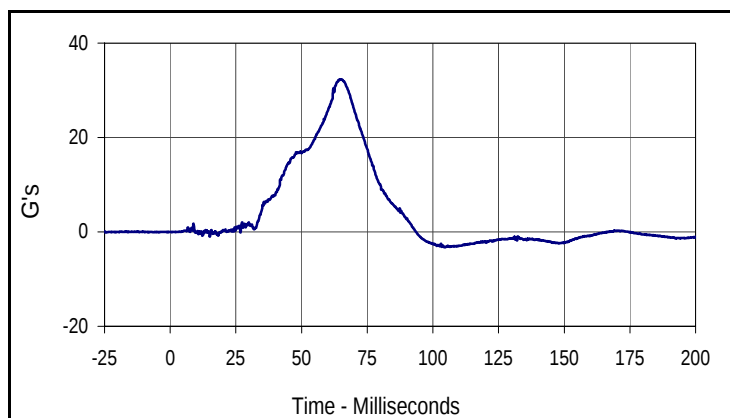

Curve Description			
Driver Head Acceleration Y Primary			
CURNO	Type	SAE Class	Units
002	FIL	1000	G's
Max	Time	Min	Time
32.3	64.9	-3.3	104.3

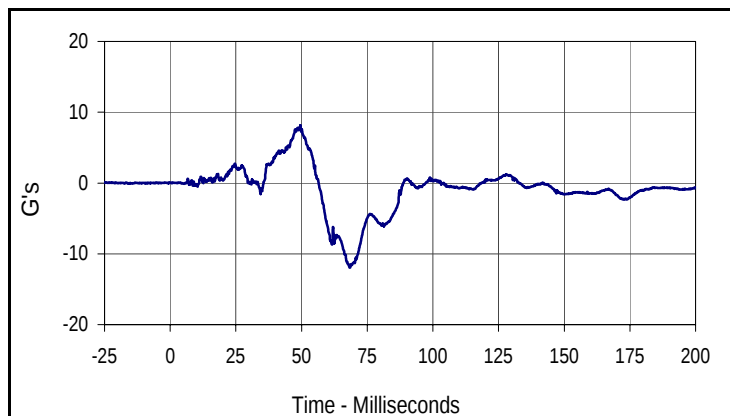


Curve Description			
Driver Head Acceleration Z Primary			
CURNO	Type	SAE Class	Units
003	FIL	1000	G's
Max	Time	Min	Time
8.2	49.6	-12.0	68.4

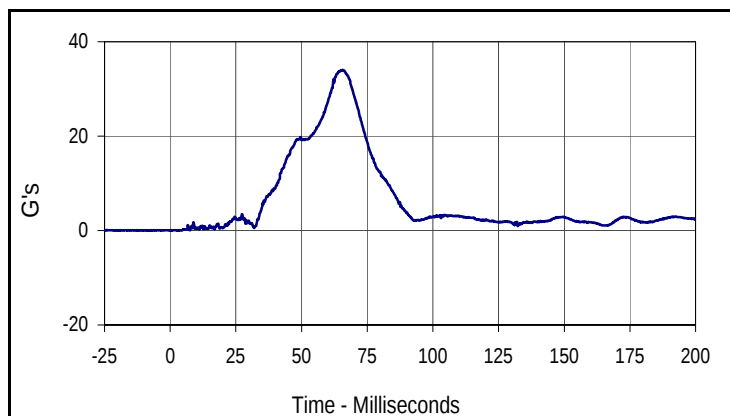


Curve Description			
Driver Head Resultant Acceleration Primary			
CURNO	Type	SAE Class	Units
001	RES	1000	G's
Max	Time	Min	Time
34.0	65.6	0.0	4.1

Test Vehicle: 2011 Toyota Venza 5-Door MPV
 Test Program: 61 km/h (38 mph) Side Impact NCAP 27° Moving Deformable Barrier Test


Test Date: 12/1/10
 NHTSA No.: MB5128

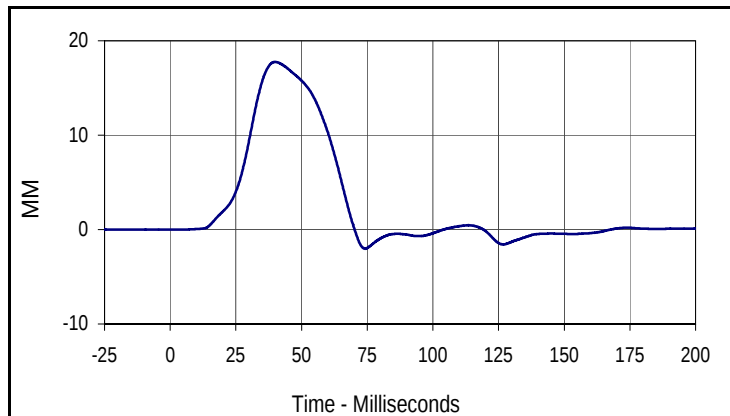


Curve Description			
Driver Upper Thorax Rib Deflection Y			
CURNO	Type	SAE Class	Units
007	FIL	180	MM
Max	Time	Min	Time
17.8	39.9	-2.0	74.2

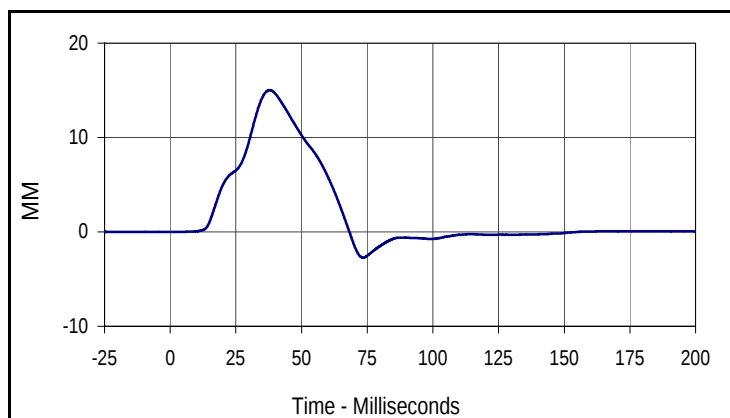

Curve Description			
Driver Middle Thorax Rib Deflection Y			
CURNO	Type	SAE Class	Units
008	FIL	180	MM
Max	Time	Min	Time
15.0	37.9	-2.7	73.4

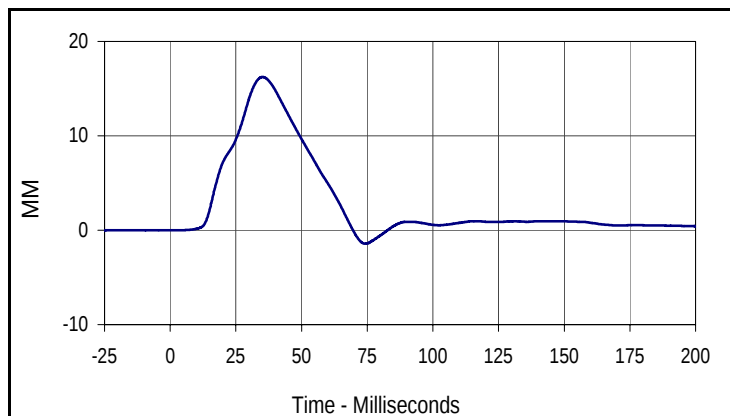


Curve Description			
Driver Lower Thorax Rib Deflection Y			
CURNO	Type	SAE Class	Units
009	FIL	180	MM
Max	Time	Min	Time
16.2	35.2	-1.4	74.2

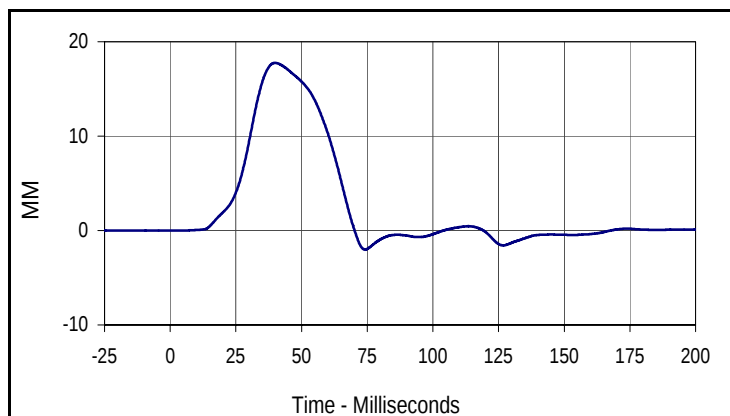


Curve Description			
Driver Thorax Rib Deflection Maximum			
CURNO	Type	SAE Class	Units
010	FIL	180	MM
Max	Time	Min	Time
17.8	39.9	-2.0	74.2

Test Vehicle: 2011 Toyota Venza 5-Door MPV
 Test Program: 61 km/h (38 mph) Side Impact NCAP 27° Moving Deformable Barrier Test


Test Date: 12/1/10
 NHTSA No.: MB5128

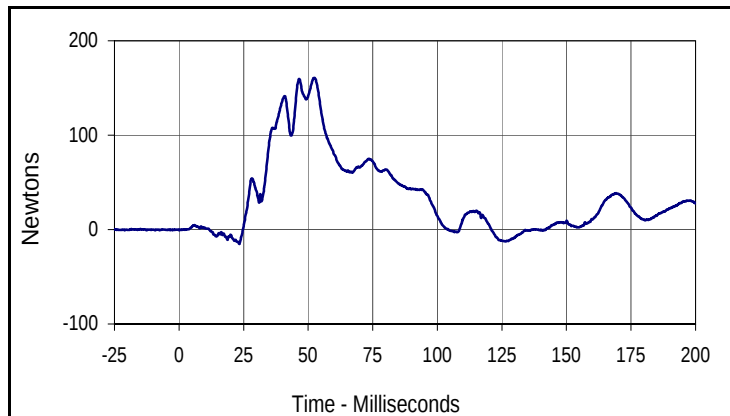


Curve Description			
Driver Anterior Abdominal Force Y			
CURNO	Type	SAE Class	Units
013	FIL	600	Newtons
Max	Time	Min	Time
160.6	52.4	-15.2	23.3

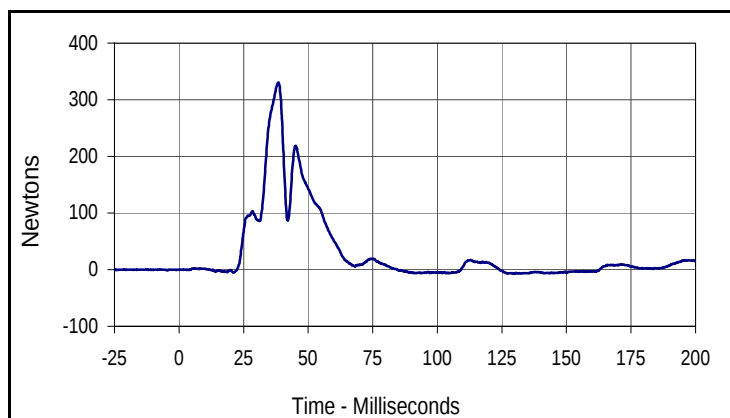

Curve Description			
Driver Middle Abdominal Force Y			
CURNO	Type	SAE Class	Units
014	FIL	600	Newtons
Max	Time	Min	Time
330.4	38.5	-7.4	129.7

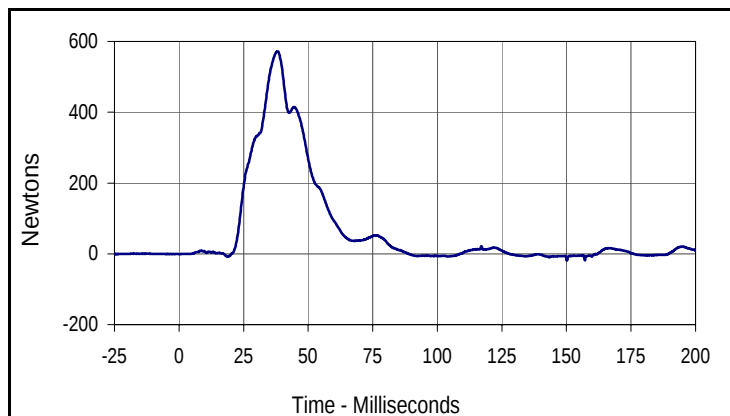


Curve Description			
Driver Posterior Abdominal Force Y			
CURNO	Type	SAE Class	Units
015	FIL	600	Newtons
Max	Time	Min	Time
571.6	38.1	-19.3	150.2

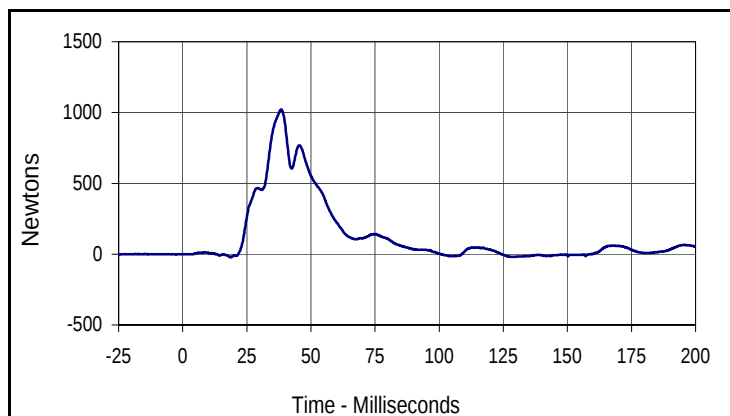

Curve Description			
Driver Total Abdominal Force			
CURNO	Type	SAE Class	Units
013	RES	600	Newtons
Max	Time	Min	Time
1020.9	38.5	-23.3	18.7

Test Vehicle: 2011 Toyota Venza 5-Door MPV
 Test Program: 61 km/h (38 mph) Side Impact NCAP 27° Moving Deformable Barrier Test


Test Date: 12/1/10
 NHTSA No.: MB5128

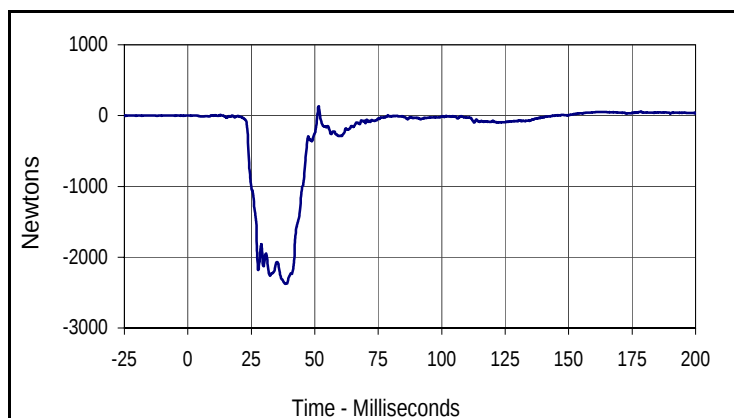


Curve Description			
Driver Pubic Symphysis Force Y			
CURNO	Type	SAE Class	Units
016	FIL	600	Newtons
Max	Time	Min	Time
133.5	51.5	-2376.8	38.4

Test Vehicle: 2011 Toyota Venza 5-Door MPV
 Test Program: 61 km/h (38 mph) Side Impact NCAP 27° Moving Deformable Barrier Test


Test Date: 12/1/10
 NHTSA No.: MB5128

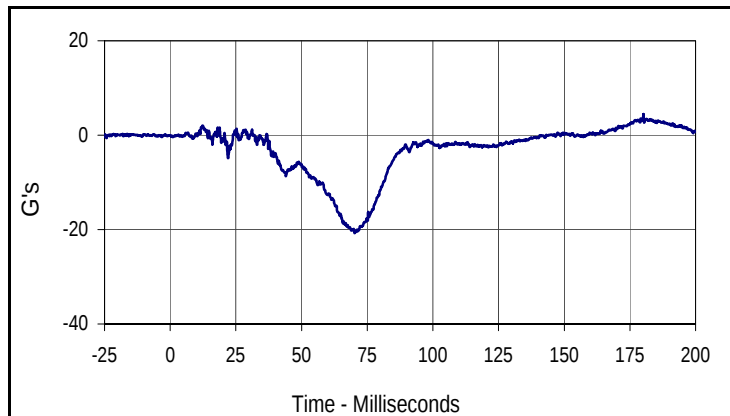


Curve Description			
Passenger Head Acceleration X Primary			
CURNO	Type	SAE Class	Units
021	FIL	1000	G's
Max	Time	Min	Time
4.5	180.1	-20.7	70.3

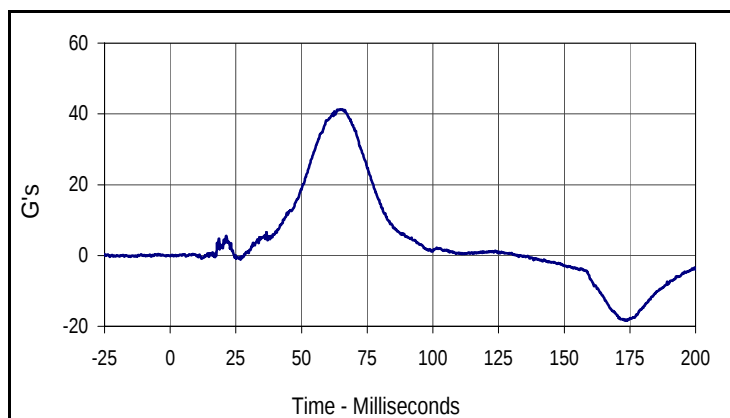

Curve Description			
Passenger Head Acceleration Y Primary			
CURNO	Type	SAE Class	Units
022	FIL	1000	G's
Max	Time	Min	Time
41.3	65.3	-18.4	173.1

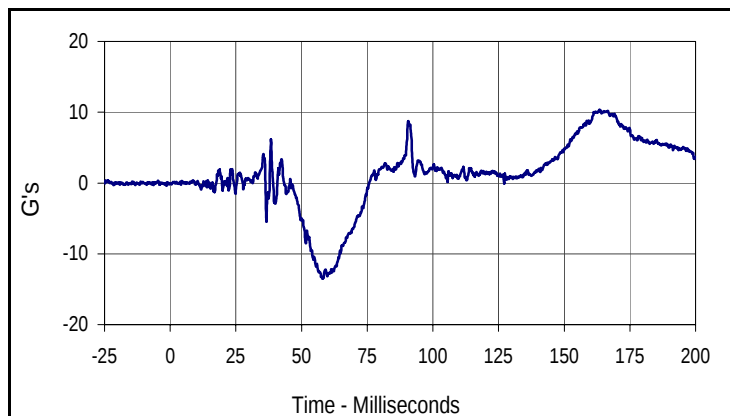


Curve Description			
Passenger Head Acceleration Z Primary			
CURNO	Type	SAE Class	Units
023	FIL	1000	G's
Max	Time	Min	Time
10.4	163.4	-13.5	57.9

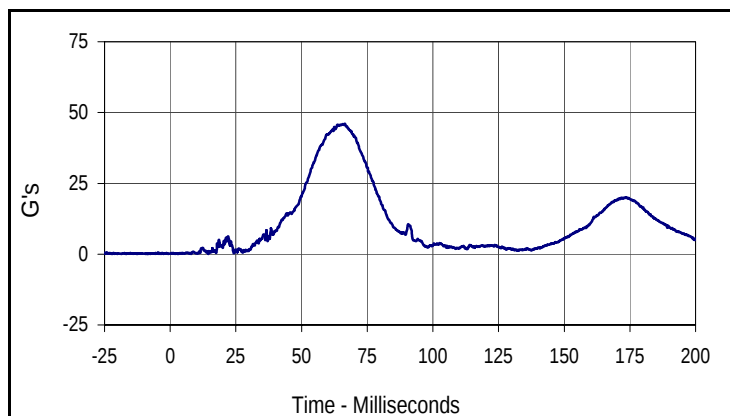


Curve Description			
Passenger Head Acceleration Resultant Primary			
CURNO	Type	SAE Class	Units
021	RES	1000	G's
Max	Time	Min	Time
46.1	66.5	0.1	2.6

Test Vehicle: 2011 Toyota Venza 5-Door MPV
 Test Program: 61 km/h (38 mph) Side Impact NCAP 27° Moving Deformable Barrier Test


Test Date: 12/1/10
 NHTSA No.: MB5128

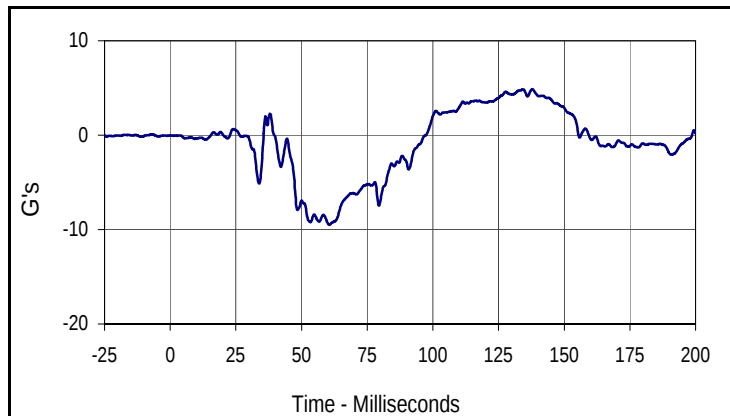


Curve Description			
Passenger Lower Spine T12 Acceleration X			
CURNO	Type	SAE Class	Units
037	FIL	180	G's
Max	Time	Min	Time
4.9	137.9	-9.5	60.6

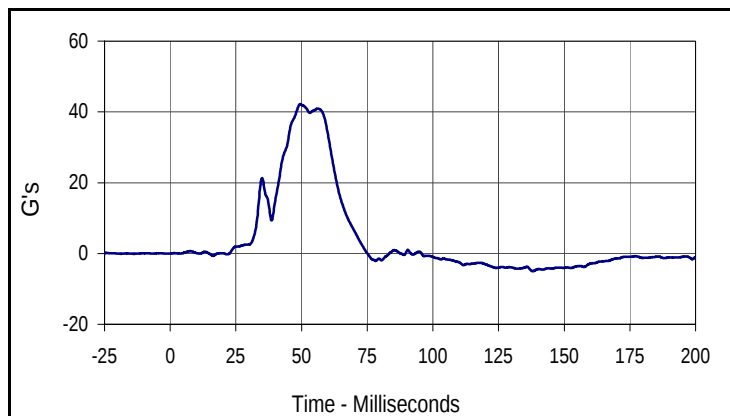

Curve Description			
Passenger Lower Spine T12 Acceleration Y			
CURNO	Type	SAE Class	Units
038	FIL	180	G's
Max	Time	Min	Time
42.2	49.5	-5.0	138.0

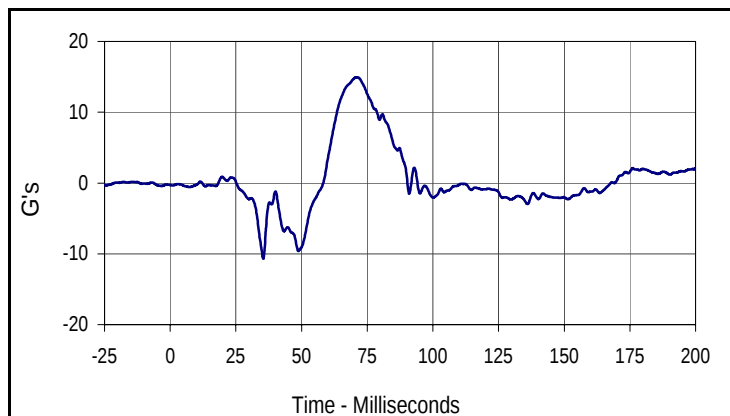


Curve Description			
Passenger Lower Spine T12 Acceleration Z			
CURNO	Type	SAE Class	Units
039	FIL	180	G's
Max	Time	Min	Time
14.9	71.1	-10.7	35.4

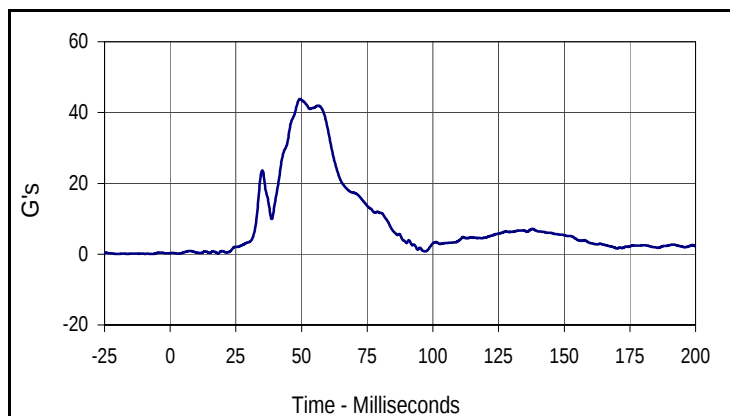


Curve Description			
Passenger Lower Spine T12 Acceleration Resultant			
CURNO	Type	SAE Class	Units
037	RES	180	G's
Max	Time	Min	Time
43.9	49.4	0.1	18.3

Test Vehicle: 2011 Toyota Venza 5-Door MPV
 Test Program: 61 km/h (38 mph) Side Impact NCAP 27° Moving Deformable Barrier Test


Test Date: 12/1/10
 NHTSA No.: MB5128

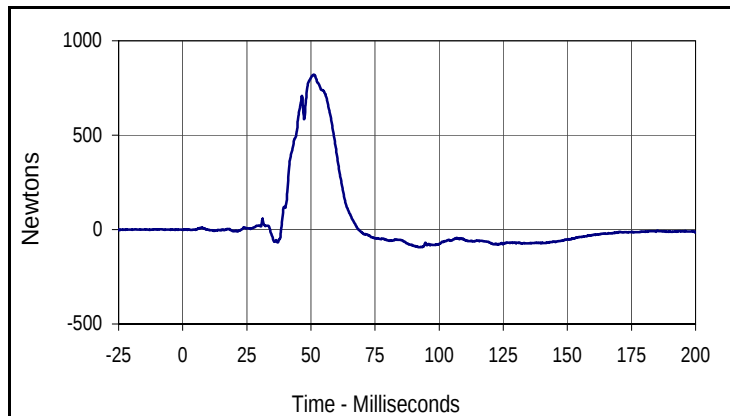

Curve Description			
Passenger Iliac Wing Force on Impact Side Y			
CURNO	Type	SAE Class	Units
043	FIL	600	Newtons
Max	Time	Min	Time
820.2	51.2	-94.0	92.0

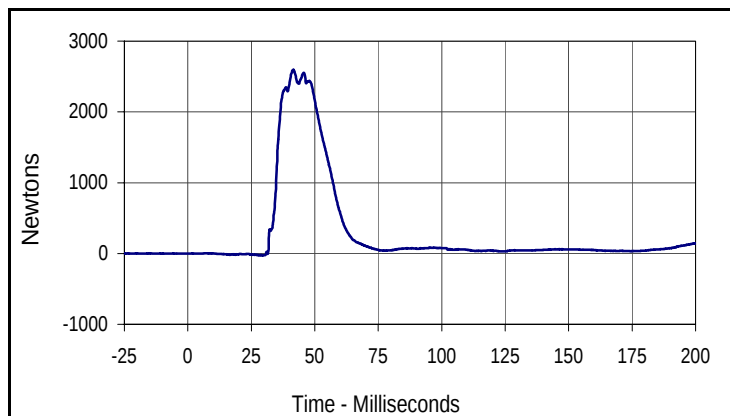

Curve Description			
Passenger Acetabulum Force on Impact Side Y			
CURNO	Type	SAE Class	Units
042	FIL	600	Newtons
Max	Time	Min	Time
2595.5	41.5	-27.7	28.3

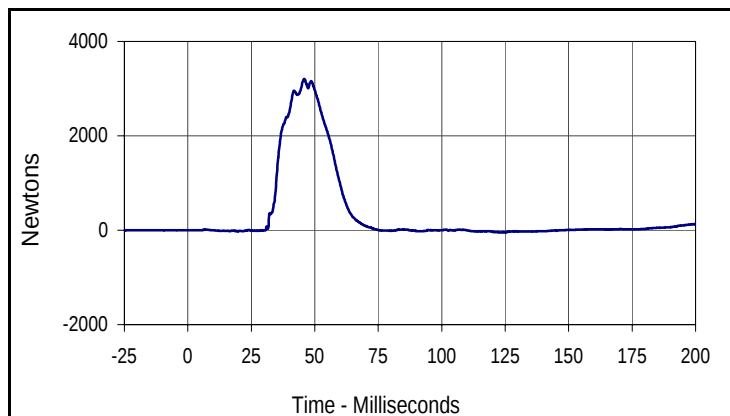

Curve Description			
Passenger Total Pelvic Force			
CURNO	Type	SAE Class	Units
042	SUM	600	Newtons
Max	Time	Min	Time
3203.8	45.9	-48.6	122.7

APPENDIX C
DUMMY CALIBRATION DATA


APPENDIX C
PRE-TEST / HIII CONFIGURATION AND PERFORMANCE VERIFICATION DATA

Test Program: ES2re Neck Calibration
 ATD Serial No.: F035


Test Date: 11/23/10
 Test I.D.: NB11B



Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Velocity		m/s	3.30 to 3.50	3.36	Pass
Pendulum Deceleration	1 msec	m/s	0.0 to -.050	-0.050	Pass
	3 msec	m/s	-.250 to -.375	-0.327	Pass
	14 msec	m/s	-3.20 to -3.70	-3.33	Pass
Headform Rotation	Max	Degrees	49.0 to 58.0	54.1	Pass
	Time	msec	54.0 to 66.0	61.0	Pass
Maximum Rotation To Time Zero Crossing		msec	53.0 to 88.0	62.8	Pass
			Overall Test Results		Pass

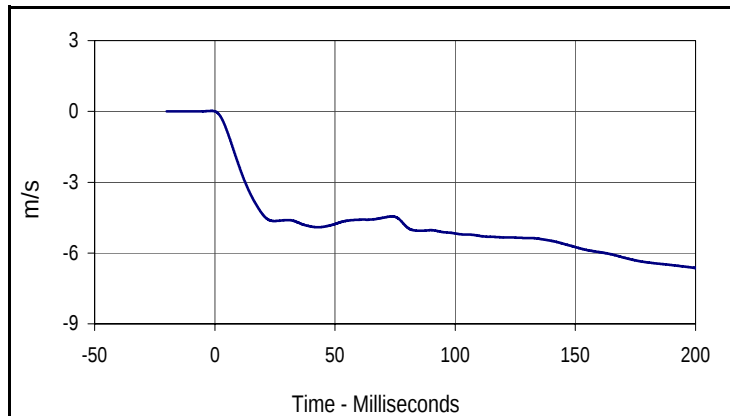

Curve Description			
Pendulum Velocity			
CURNO	Type	SAE Class	Units
001	FIL	60	m/s
Max	Time	Min	Time
0.0	-1.4	-6.6	200.0

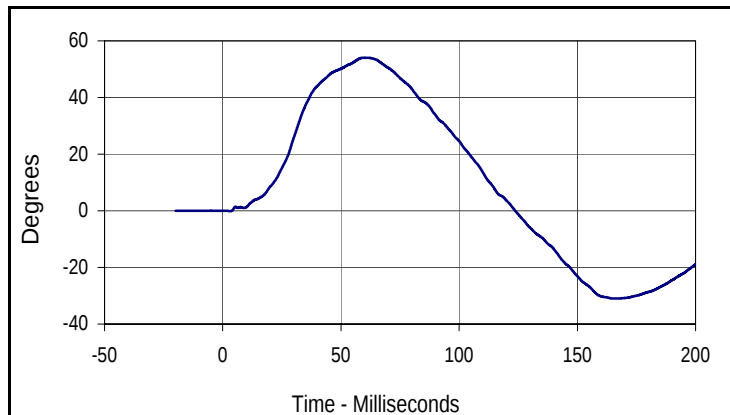


Curve Description			
Headform Rotation			
CURNO	Type	SAE Class	Units
002	FIL	180	Degrees
Max	Time	Min	Time
54.1	61.0	-31.0	164.9

Test Program: ES2re Shoulder Calibration
 ATD Serial No.: F035

Test Date: 11/23/10
 Test I.D.: SH11B



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	4.20 to 4.40	4.25	Pass
Peak Impactor Acceleration	G's	7.5 to 10.5	9.12	Pass
Overall Test Results			Pass	

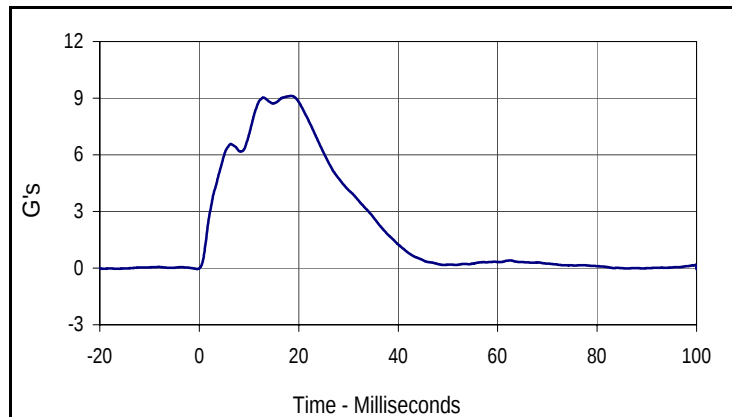


Curve Description			
Impactor Acceleration			
CURNO	Type	SAE Class	Units
001	FIL	180	G's
Max	Time	Min	Time
9.1	18.5	0.0	-0.4

Test Program: ES2re Rib Module Calibration
 ATD Serial No.: F035 Rib #1


Test Date: 11/23/10
 Test I.D.: RIB11D



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Peak Rib Deflection at 459 MM Drop Height	MM	36 to 40	38.1	Pass
Peak Rib Deflection at 815 MM Drop Height	MM	46 to 51	47.4	Pass
Overall Test Results			Pass	

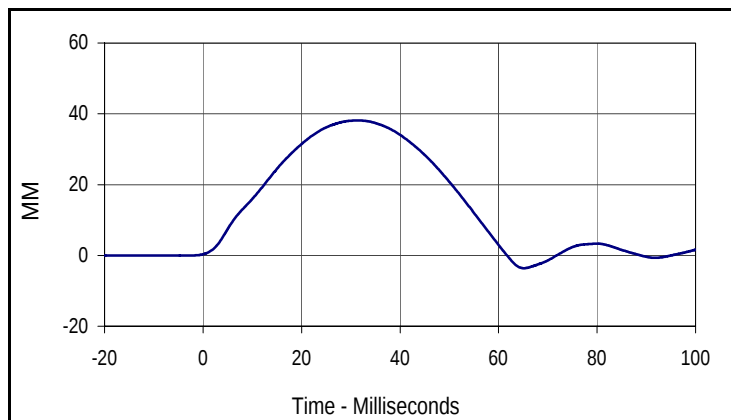

Curve Description			
Upper Rib Deflection (459 MM Drop Height)			
CURNO	Type	SAE Class	Units
001	FIL	180	MM
Max	Time	Min	Time
38.1	31.4	-3.6	65.1

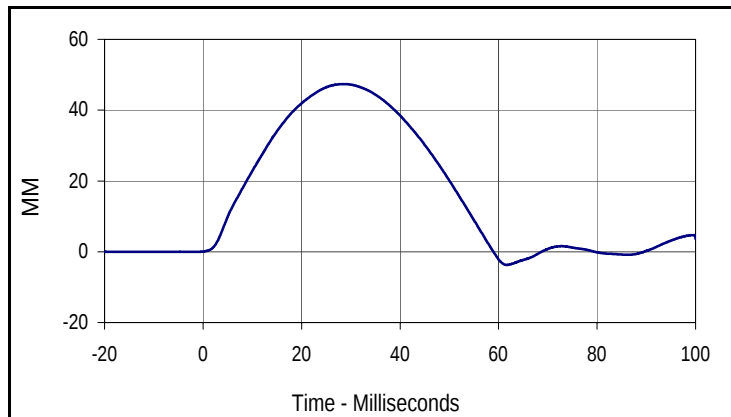


Curve Description			
Upper Rib Deflection (815 MM Drop Height)			
CURNO	Type	SAE Class	Units
001	FIL	180	MM
Max	Time	Min	Time
47.4	28.6	-3.7	61.7

Test Program: ES2re Rib Module Calibration
 ATD Serial No.: F035 Rib #2


Test Date: 11/23/10
 Test I.D.: RIB11E



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Peak Rib Deflection at 459 MM Drop Height	MM	36 to 40	38.4	Pass
Peak Rib Deflection at 815 MM Drop Height	MM	46 to 51	48.8	Pass
Overall Test Results			Pass	

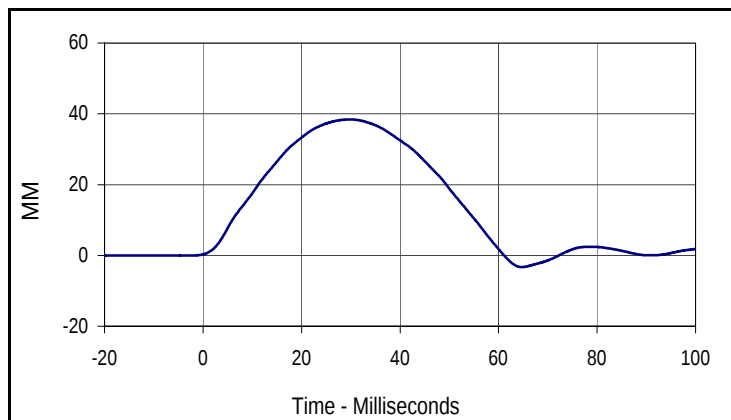

Curve Description			
Middle Rib Deflection (459 MM Drop Height)			
CURNO	Type	SAE Class	Units
001	FIL	180	MM
Max	Time	Min	Time
38.4	29.7	-3.3	64.7

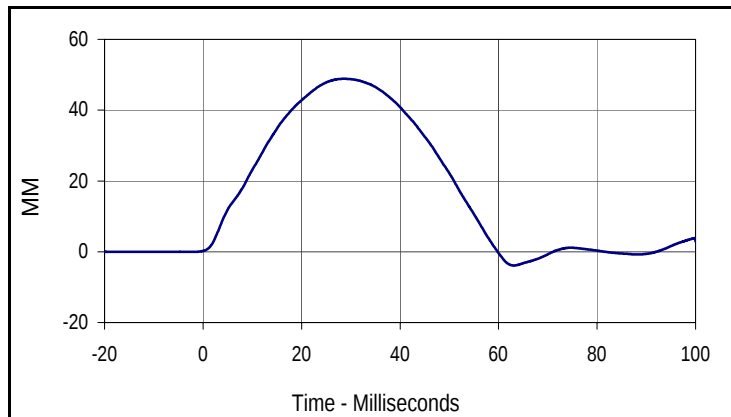


Curve Description			
Middle Rib Deflection (815 MM Drop Height)			
CURNO	Type	SAE Class	Units
001	FIL	180	MM
Max	Time	Min	Time
48.8	28.7	-3.9	63.1

Test Program: ES2re Rib Module Calibration
 ATD Serial No.: F035 Rib #3


Test Date: 11/23/10
 Test I.D.: RIB11F



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Peak Rib Deflection at 459 MM Drop Height	MM	36 to 40	38.0	Pass
Peak Rib Deflection at 815 MM Drop Height	MM	46 to 51	48.4	Pass
Overall Test Results			Pass	

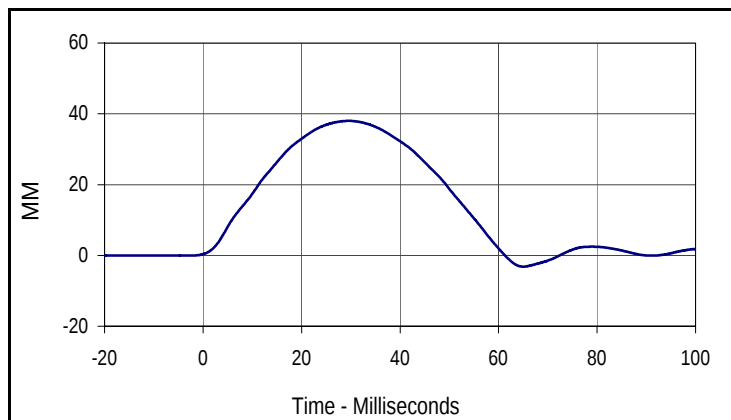

Curve Description			
Lower Rib Deflection (459 MM Drop Height)			
CURNO	Type	SAE Class	Units
001	FIL	180	MM
Max	Time	Min	Time
38.0	29.6	-3.2	65.0

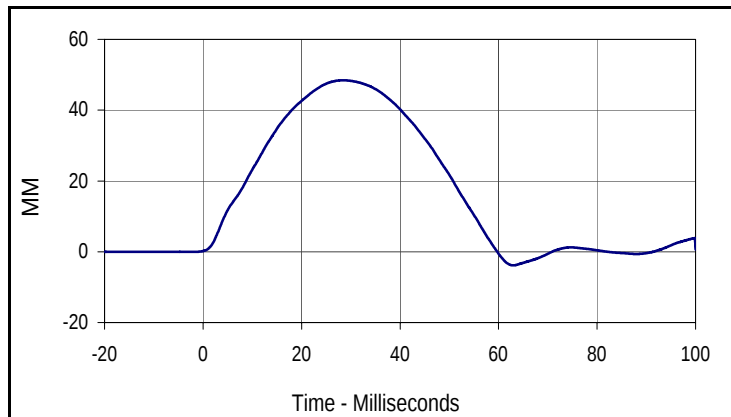


Curve Description			
Lower Rib Deflection (815 MM Drop Height)			
CURNO	Type	SAE Class	Units
001	FIL	180	MM
Max	Time	Min	Time
48.4	28.4	-3.8	63.0

Test Program: ES2re Thorax Calibration
 ATD Serial No.: F035


Test Date: 11/23/10
 Test I.D.: TH11B



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	5.40 to 5.60	5.44	Pass
Impactor Force	N	5100 to 6200	5879.2	Pass
	msec	> 6.0 msec	11.3	Pass
Upper Rib Deflection	MM	34 to 41	37.2	Pass
Middle Rib Deflection	MM	37 to 45	40.2	Pass
Lower Rib Deflection	MM	37 to 44	42.0	Pass
Overall Test Results				Pass

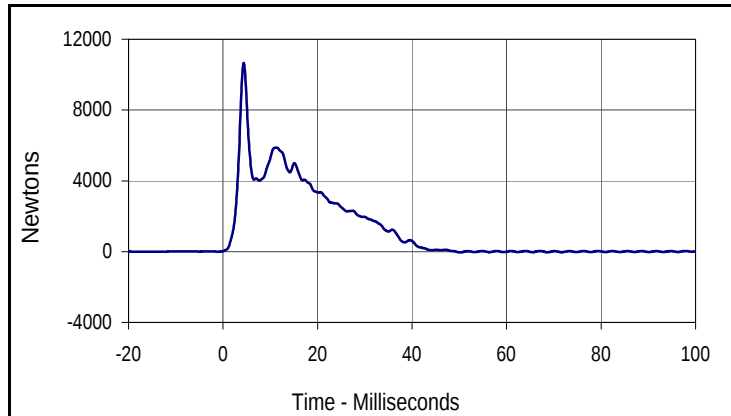

Curve Description			
Impactor Force			
CURNO	Type	SAE Class	Units
001	FIL	180	Newtons
Max	Time	Min	Time
10653.2	4.4	-44.7	50.3

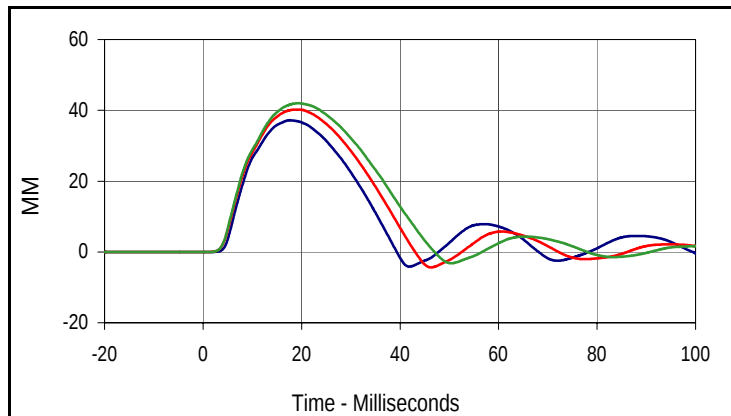


Curve Description			
Upper, Middle, Lower Rib Deflections			
CURNO(s)	Type	SAE Class	Units
002-003-004	FIL	180	MM
Max (Upper)	Time	Min (Upper)	Time
37.2	17.6	-4.2	41.9
Max (Middle)	Time	Min (Middle)	Time
40.2	19.1	-4.4	46.3
Max (Lower)	Time	Min (Lower)	Time
42.0	19.3	-3.2	50.4

Test Program: ES2re Abdomen Calibration
 ATD Serial No.: F035


Test Date: 11/23/10
 Test I.D.: ABD11B



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	3.90 to 4.10	3.95	Pass
Impactor Force	N	4000 to 4800	4349.3	Pass
	msec	10.6 to 13.0	10.8	Pass
Abdominal Force	N	2200 to 2700	2269.4	Pass
	msec	10.0 to 12.3	11.1	Pass
Overall Test Results				Pass

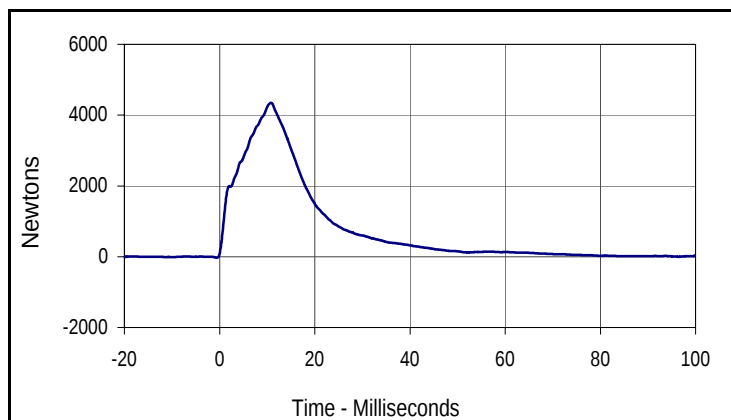

Curve Description			
Impactor Force			
CURNO	Type	SAE Class	Units
001	FIL	180	Newtons
Max	Time	Min	Time
4349.3	10.8	-29.0	-0.6

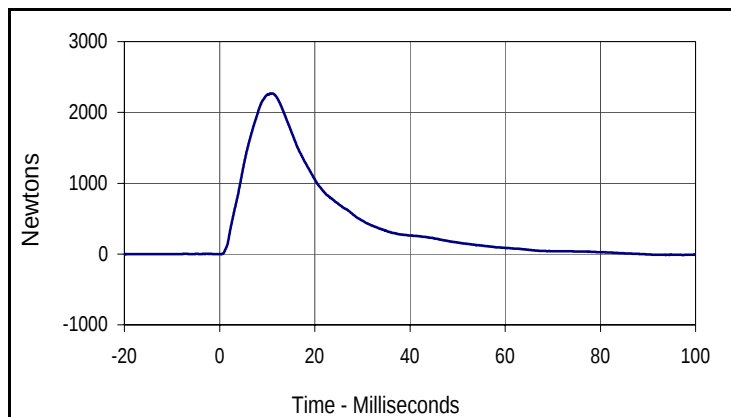


Curve Description			
Abdomen Sum Resultant			
CURNO	Type	SAE Class	Units
002	RES	600	Newtons
Max	Time	Min	Time
2269.4	11.1	-12.8	97.4

Test Program: ES2re Lumbar Spine Calibration
 ATD Serial No.: F035


Test Date: 11/23/10
 Test I.D.: SP11B



Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Velocity		m/s	5.95 to 6.15	6.00	Pass
Pendulum Deceleration	1 msec	m/s	0.0 to -.050	-0.029	Pass
	3.7 msec	m/s	-.240 to -.425	-0.412	Pass
	27 msec	m/s	-5.80 to -6.50	-5.98	Pass
	30 msec	m/s	< -6.50	-6.40	Pass
Headform Rotation	Max	Degrees	45.0 to 55.0	51.5	Pass
	Time	msec	39.0 to 53.0	42.6	Pass
Maximum Rotation To Time Zero Crossing		msec	37.0 to 57.0	41.2	Pass
			Overall Test Results		Pass

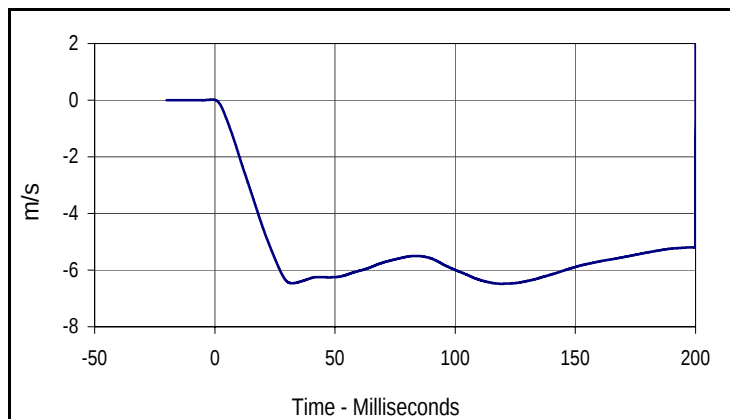

Curve Description			
Pendulum Velocity			
CURNO	Type	SAE Class	Units
001	FIL	60	m/s
Max	Time	Min	Time
3.7	200.0	-6.5	119.2

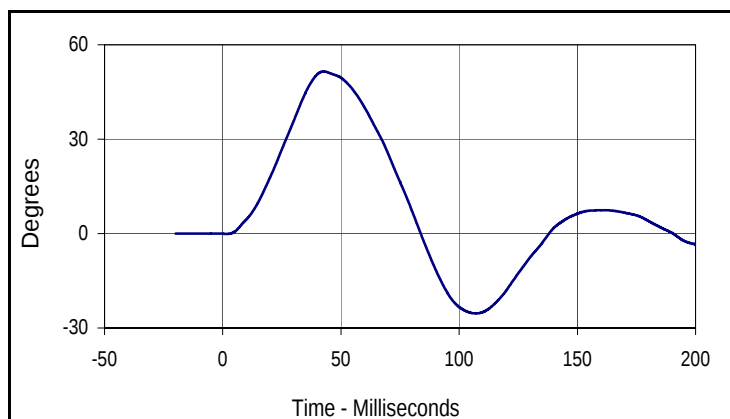


Curve Description			
Headform Rotation			
CURNO	Type	SAE Class	Units
002	FIL	180	Degrees
Max	Time	Min	Time
51.5	42.6	-25.4	107.0

Test Program: ES2re Pelvis Calibration
 ATD Serial No.: F035


Test Date: 11/23/10
 Test I.D.: PL11B



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	4.20 to 4.40	4.27	Pass
Impactor Force	N	4700 to 5400	4719.7	Pass
	msec	11.8 to 16.1	12.6	Pass
Pubic Symphysis Load	N	-1230 to -1590	-1427.0	Pass
	msec	12.2 to 17.0	13.7	Pass
Overall Test Results				Pass

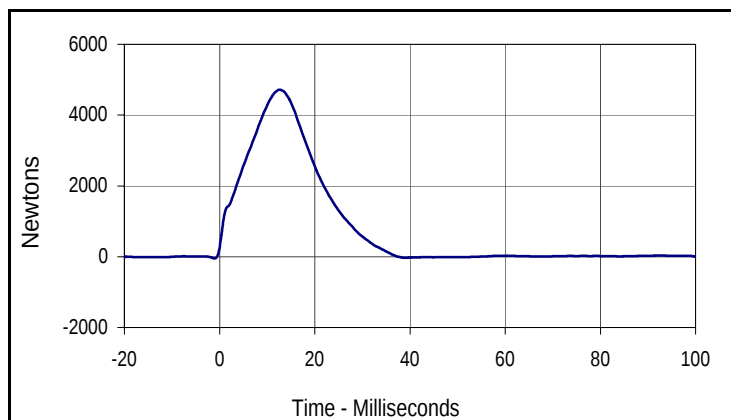

Curve Description			
Impactor Force			
CURNO	Type	SAE Class	Units
001	FIL	180	Newtons
Max	Time	Min	Time
4719.7	12.6	-48.3	-1.1

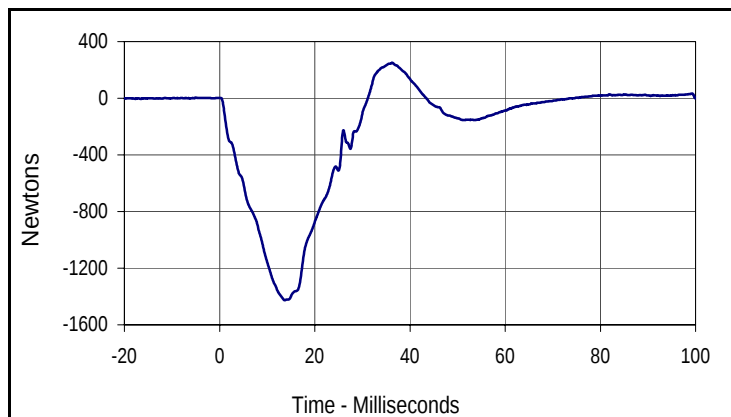


Curve Description			
Pubic FY			
CURNO	Type	SAE Class	Units
002	FIL	600	Newtons
Max	Time	Min	Time
250.1	36.3	-1427.0	13.7

Test Program: ES2re Lateral Head Drop Calibration
 ATD Serial No.: F035


Test Date: 11/23/10
 Test I.D.: HD11B



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Peak Resultant Acceleration	G's	125 to 155	133.4	Pass
Peak Longitudinal Acceleration	G's	≤15	3.4	Pass
Is Acceleration Unimodal?	Yes/No	Yes	Yes	Pass
Oscillations After Main Pulse	%	<15	5.4	Pass
Overall Test Results			Pass	

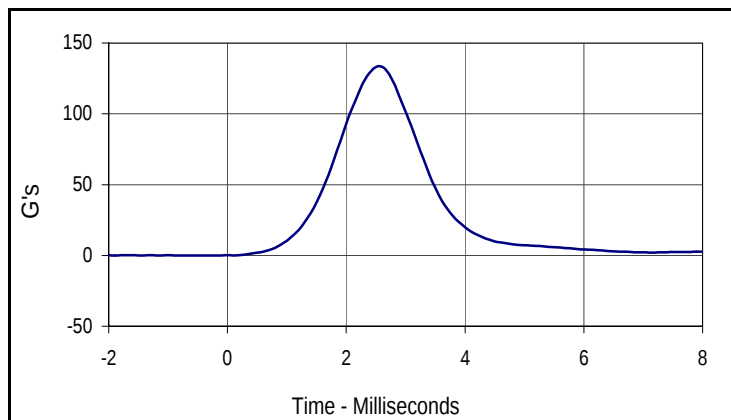

Curve Description			
Head Resultant			
CURNO	Type	SAE Class	Units
001	RES	1000	G's
Max	Time	Min	Time
133.4	2.6	0.0	-0.2

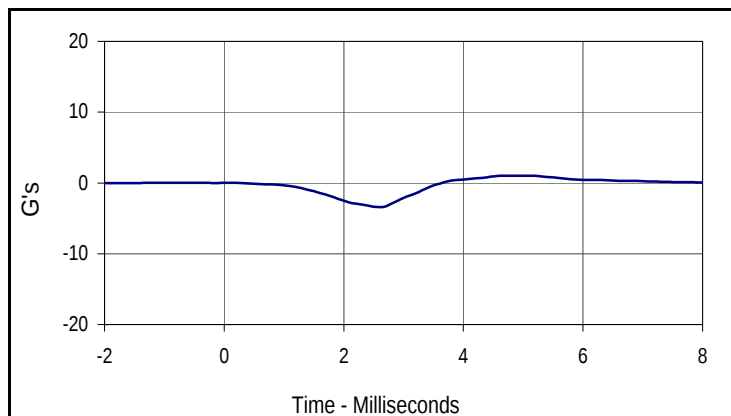


Curve Description			
Head X			
CURNO	Type	SAE Class	Units
002	FIL	1000	G's
Max	Time	Min	Time
1.0	5.1	-3.4	2.6

Test Program: SID IIs Lateral Head Drop Calibration
 ATD Serial No.: 307


Test Date: 11/23/10
 Test I.D.: HDF11B



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Peak Resultant Acceleration	G's	115 to 137	128.6	Pass
Peak Longitudinal Acceleration	G's	≤15	4.2	Pass
Is Acceleration Unimodal?	Yes/No	Yes	Yes	Pass
Oscillations After Main Pulse	%	<15	7.6	Pass
Overall Test Results			Pass	

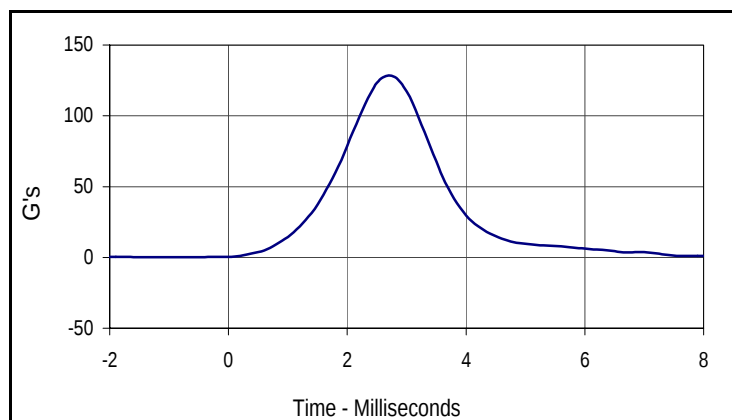

Curve Description			
Head Resultant			
CURNO	Type	SAE Class	Units
001	RES	1000	G's
Max	Time	Min	Time
128.6	2.7	0.2	-1.3

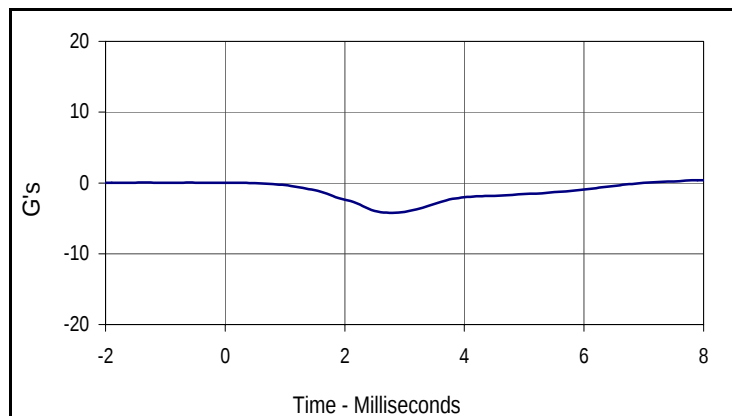


Curve Description			
Head X			
CURNO	Type	SAE Class	Units
002	FIL	1000	G's
Max	Time	Min	Time
0.0	-1.4	-4.2	2.8

Test Program: SID IIs Neck Calibration
 ATD Serial No.: 307


Test Date: 11/23/10
 Test I.D.: NBF11B




Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Velocity		m/s	5.51 to 5.63	5.56	Pass
Pendulum Deceleration	10 msec	m/s	-2.20 to -2.80	-2.5	Pass
	15 msec	m/s	-3.30 to -4.10	-3.6	Pass
	20 msec	m/s	-4.40 to -5.40	-4.8	Pass
	25 msec	m/s	-5.40 to -6.10	-5.5	Pass
	25-100 msec	m/s	-5.50 to -6.20	-6.1	Pass
Translation-Rotation	Max	Degrees	71.0 to 81.0	80.2	Pass
	Time	msec	50.0 to 70.0	65.6	Pass
Peak Occipital Condyle Moment		Nm	-36.0 to -44.0	-39.3	Pass
Decaying Moment Time to Cross 0 Nm		msec	102.0 to 126.0	121.4	Pass
			Overall Test Results		Pass

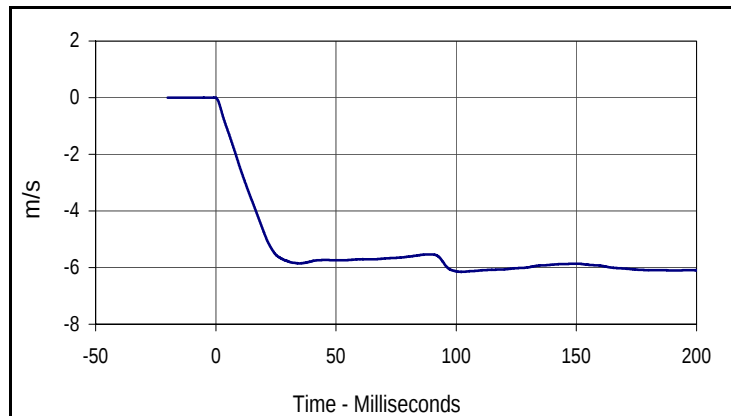

Curve Description			
Pendulum Velocity			
CURNO	Type	SAE Class	Units
001	FIL	180	m/s
Max	Time	Min	Time
0.0	-0.6	-6.2	102.0

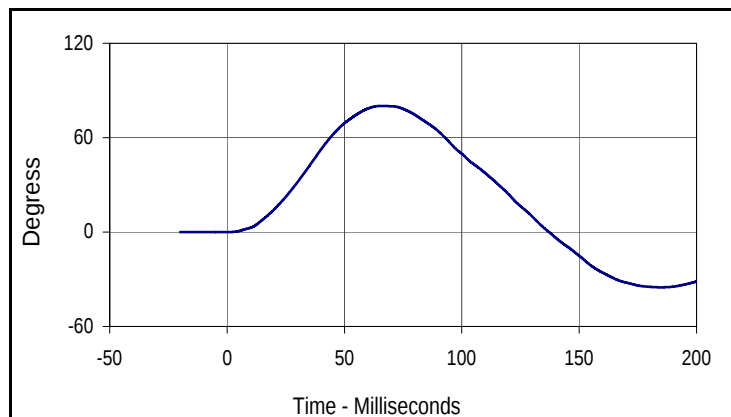

Curve Description			
Maximum Translation Rotation			
CURNO	Type	SAE Class	Units
002	FIL	60	Degress
Max	Time	Min	Time
80.2	65.6	-35.1	184.8

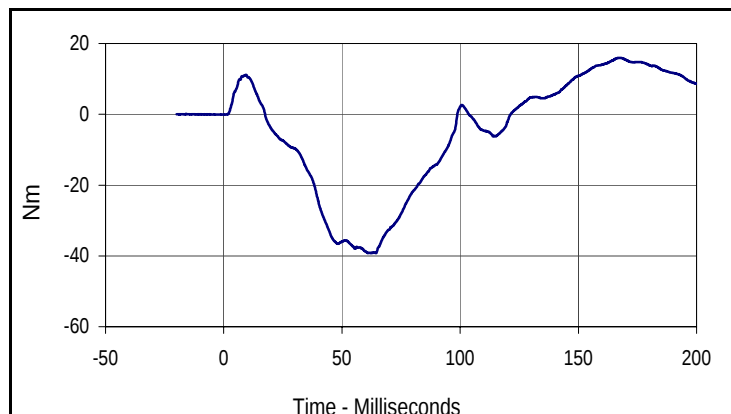


Curve Description			
Moment About Occipital Condyle			
CURNO	Type	SAE Class	Units
003	FIL	600	Nm
Max	Time	Min	Time
16.0	167.2	-39.3	64.4

Test Program: SID IIs Shoulder Calibration
 ATD Serial No.: 307


Test Date: 11/23/10
 Test I.D.: SHF11B




Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Pendulum Velocity	m/s	4.20 to 4.40	4.33	Pass
Shoulder Deflection	MM	28 to 37	33.4	Pass
Peak Upper Spine Y Acceleration	G's	17 to 22	18.9	Pass
Peak Impactor Acceleration	G's	13 to 18	15.0	Pass
Overall Test Results			Pass	

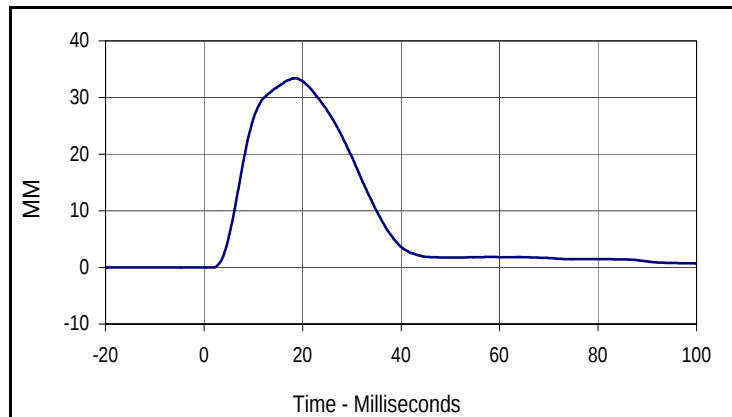

Curve Description			
Shoulder Acceleration			
CURNO	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
33.4	18.6	0.0	1.0

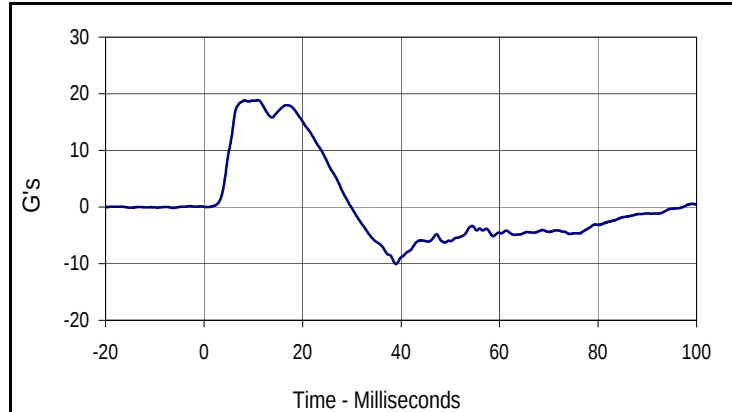

Curve Description			
Upper Spine Y Acceleration			
CURNO	Type	SAE Class	Units
002	FIL	180	G's
Max	Time	Min	Time
18.9	11.0	-10.0	39.0

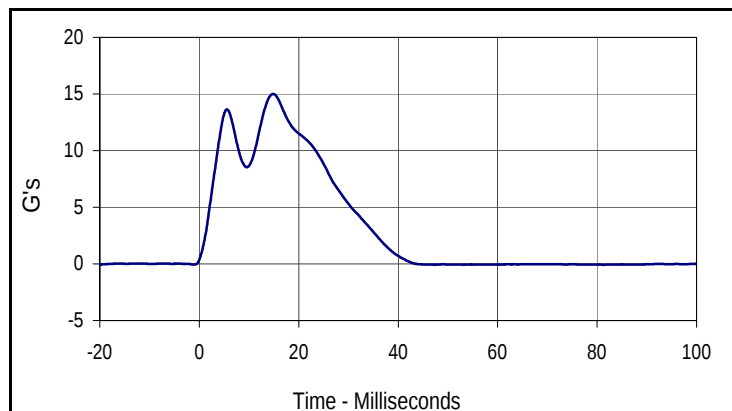


Curve Description			
Impactor Acceleration			
CURNO	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
15.0	14.8	-0.1	81.3

Test Program: SID IIs Thorax with Arm Calibration
 ATD Serial No.: 307


Test Date: 11/23/10
 Test I.D.: THF11B




Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Pendulum Velocity	m/s	6.60 to 6.80	6.71	Pass
Shoulder Deflection	MM	31 to 40	33.9	Pass
Upper Thorax Rib Deflection	MM	25 to 32	26.9	Pass
Middle Thorax Rib Deflection	MM	30 to 36	31.6	Pass
Lower Thorax Rib Deflection	MM	32 to 38	33.9	Pass
Peak Upper Spine Y Acceleration	G's	34 to 43	36.1	Pass
Peak Lower Spine Y Acceleration	G's	29 to 37	31.4	Pass
Peak Impactor Acceleration After 5 msec.	G's	30 to 36	32.8	Pass
Overall Test Results			Pass	

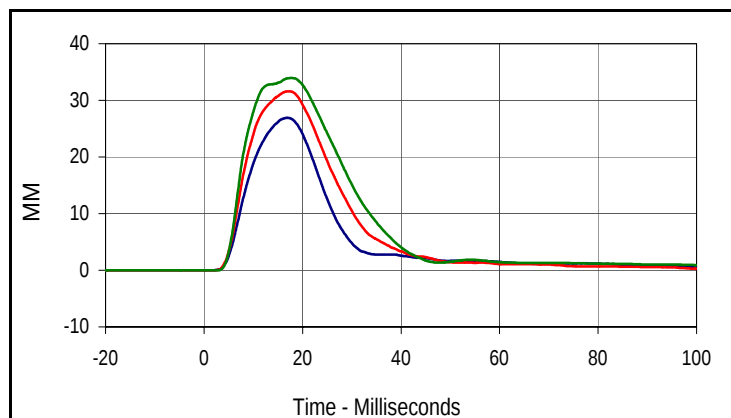

Curve Description			
Upper Thorax Deflection			
CURNO	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
26.9	16.9	0.0	-14.0
Middle Thorax Deflection			
Max	Time	Min	Time
31.6	17.0	0.0	-15.2
Lower Thorax Deflection			
Max	Time	Min	Time
33.9	17.7	0.0	-12.2

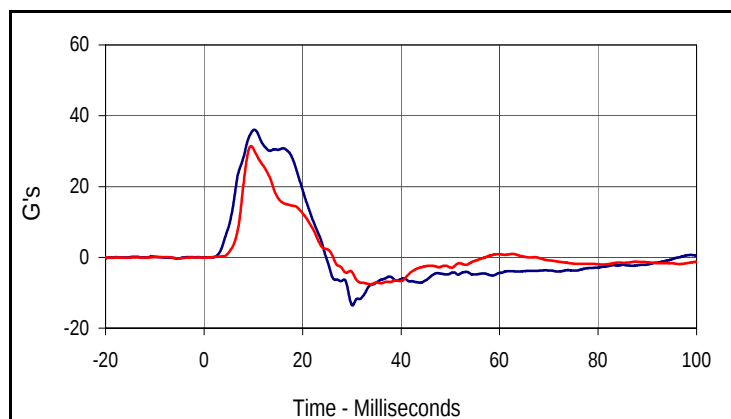

Curve Description			
Upper Spine Y Acceleration			
CURNO	Type	SAE Class	Units
004	FIL	180	G's
Max	Time	Min	Time
36.1	10.2	-13.6	30.1
Lower Spine Y Acceleration			
CURNO	Type	SAE Class	Units
005	FIL	180	G's
Max	Time	Min	Time
31.4	9.5	-7.6	33.7

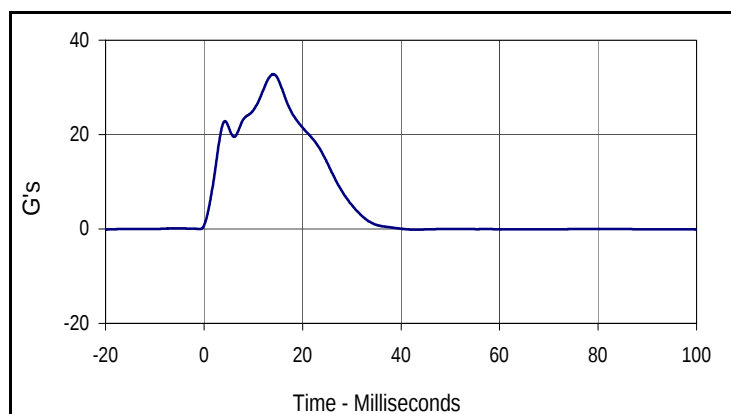


Curve Description			
Impactor Acceleration			
CURNO	Type	SAE Class	Units
006	FIL	180	G's
Max	Time	Min	Time
32.8	14.1	-0.1	42.8

Test Program: SID IIs Thorax w/o Arm Calibration
 ATD Serial No.: 307


Test Date: 11/23/10
 Test I.D.: TOA11B




Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Pendulum Velocity	m/s	4.20 to 4.40	4.33	Pass
Upper Thorax Rib Deflection	MM	32 to 40	38.0	Pass
Middle Thorax Rib Deflection	MM	39 to 45	42.6	Pass
Lower Thorax Rib Deflection	MM	35 to 43	39.0	Pass
Peak Upper Spine Y Acceleration	G's	13 to 17	14.1	Pass
Peak Lower Spine Y Acceleration	G's	7 to 11	9.2	Pass
Peak Impactor Acceleration	G's	14 to 18	16.2	Pass
Overall Test Results			Pass	

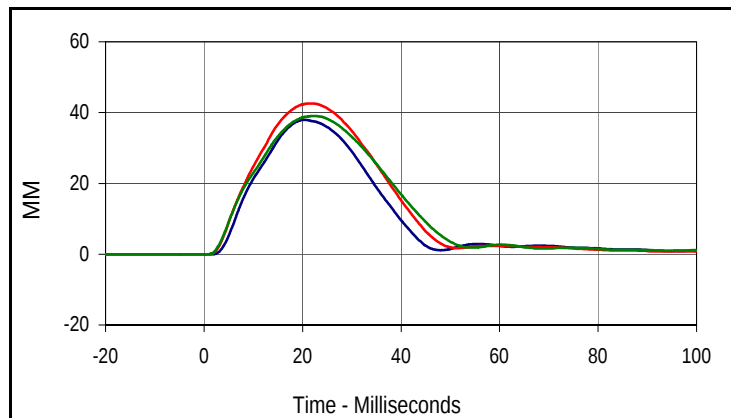

Curve Description			
Upper Thorax Deflection			
CURNO	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
38.0	20.3	0.0	-10.1
Middle Thorax Deflection			
Max	Time	Min	Time
42.6	21.6	0.0	-14.5
Lower Thorax Deflection			
Max	Time	Min	Time
39.0	22.2	0.0	0.8

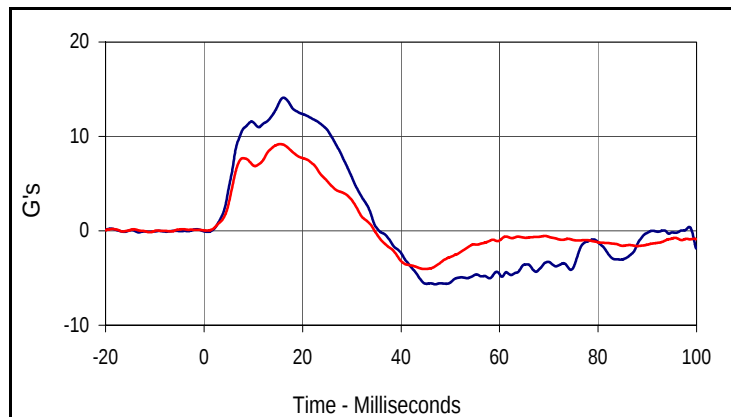

Curve Description			
Upper Spine Y Acceleration			
CURNO	Type	SAE Class	Units
004	FIL	180	G's
Max	Time	Min	Time
14.1	16.1	-5.7	47.0
Lower Spine Y Acceleration			
CURNO	Type	SAE Class	Units
005	FIL	180	G's
Max	Time	Min	Time
9.2	15.4	-4.0	44.6

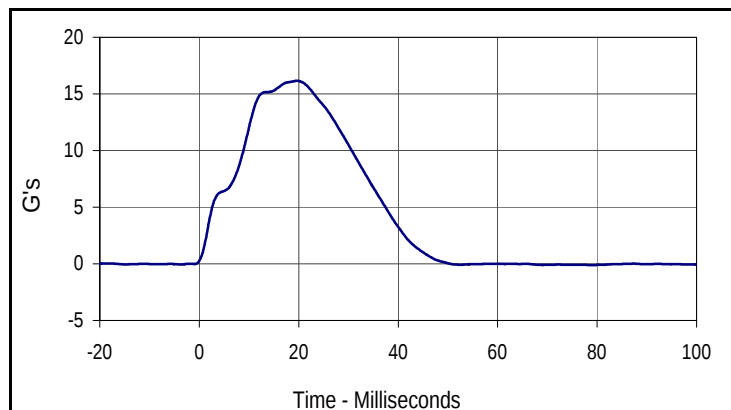


Curve Description			
Impactor Acceleration			
CURNO	Type	SAE Class	Units
006	FIL	180	G's
Max	Time	Min	Time
16.2	19.7	-0.1	78.6

Test Program: SID IIs Abdomen Calibration
 ATD Serial No.: 307

Test Date: 11/23/10
 Test I.D.: ABDF11B




Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Pendulum Velocity	m/s	4.20 to 4.40	4.34	Pass
Upper Abdominal Rib Deflection	MM	36 to 47	43.0	Pass
Lower Abdominal Rib Deflection	MM	33 to 44	38.1	Pass
Peak Lower Spine Y Acceleration	G's	9 to 14	11.1	Pass
Peak Impactor Acceleration	G's	12 to 16	14.3	Pass
Overall Test Results			Pass	

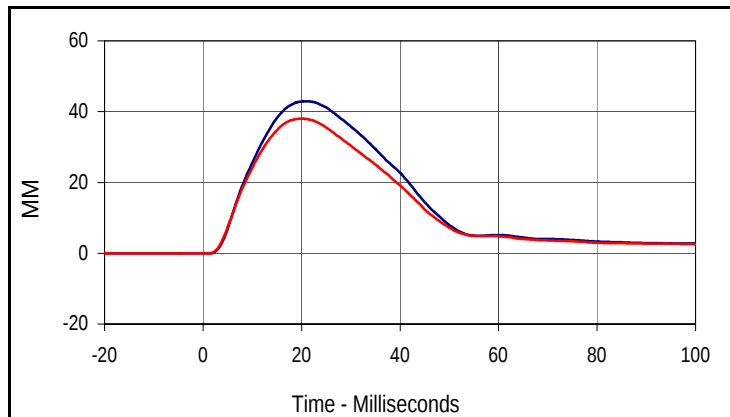


Curve Description			
Upper Abdominal Rib Deflection			
CURNO	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
43.0	20.9	0.0	-16.3

Curve Description			
Lower Abdominal Rib Deflection			
CURNO	Type	SAE Class	Units
002	FIL	600	MM
Max	Time	Min	Time
38.1	20.0	0.0	-2.5

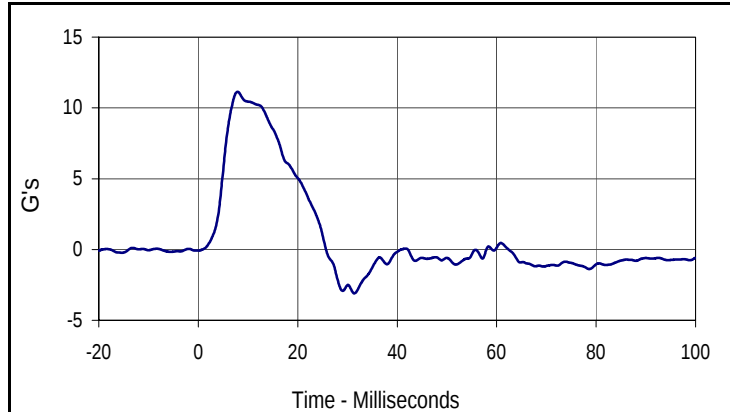

Curve Description			
Lower Spine Y Acceleration			
CURNO	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
11.1	7.9	-3.1	31.4

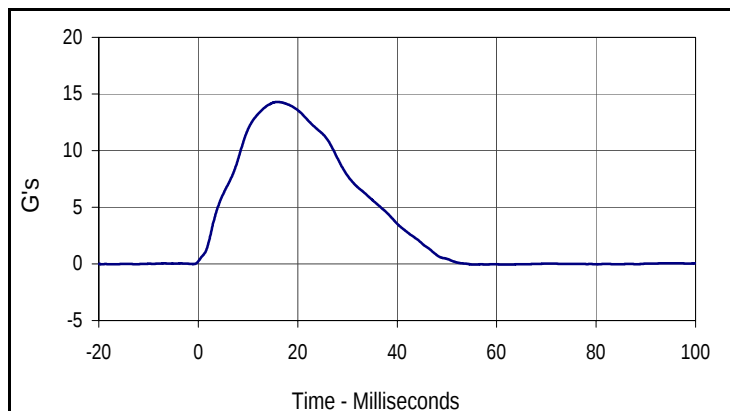


Curve Description			
Impactor Acceleration			
CURNO	Type	SAE Class	Units
004	FIL	180	G's
Max	Time	Min	Time
14.3	15.9	-0.1	55.4

Test Program: SID IIs Pelvis Acetabulum Calibration
 ATD Serial No.: 307


Test Date: 11/23/10
 Test I.D.: PA11B




Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Pendulum Velocity	m/s	6.60 to 6.80	6.71	Pass
Peak Acetabulum Force	Newtons	3600 to 4300	4027.5	Pass
Peak Pelvis Y Acceleration After 6 msec.	G's	34 to 42	39.2	Pass
Peak Impactor Acceleration	G's	38 to 47	42.7	Pass
Overall Test Results			Pass	

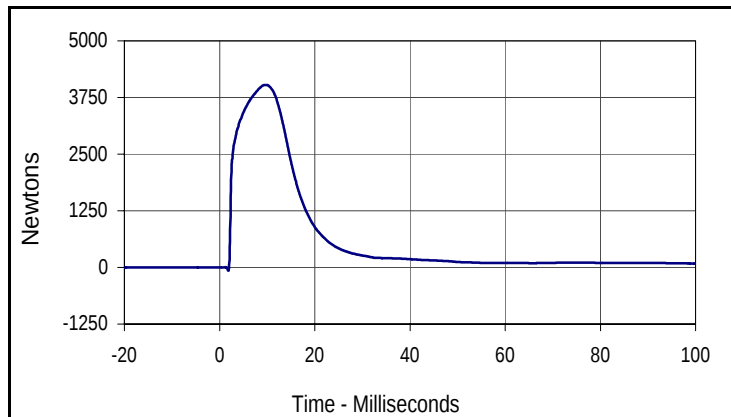

Curve Description			
Pelvis Acetabulum Force			
CURNO	Type	SAE Class	Units
001	FIL	600	Newtons
Max	Time	Min	Time
4027.5	9.6	-72.5	1.8

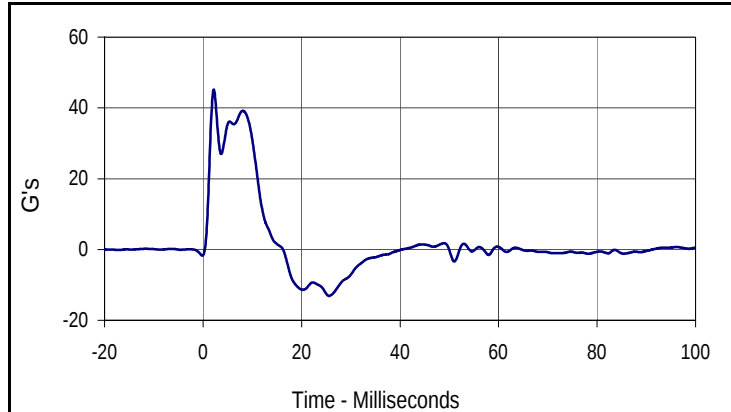

Curve Description			
Pelvis Y Acceleration			
CURNO	Type	SAE Class	Units
002	FIL	180	G's
Max	Time	Min	Time
45.2	2.2	-13.1	25.6

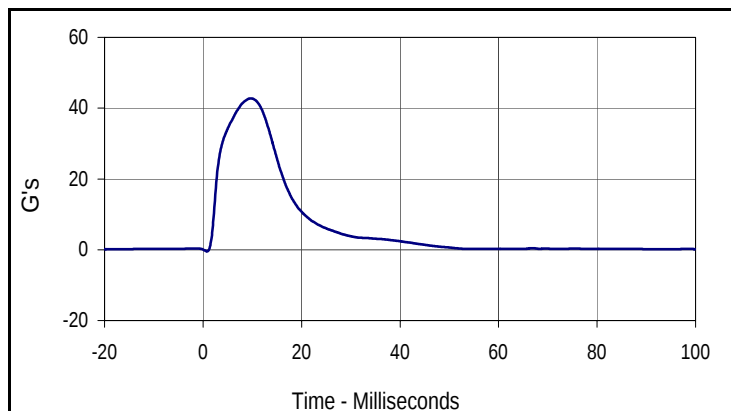


Curve Description			
Impactor Acceleration			
CURNO	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
42.7	9.7	-0.4	0.8

Test Program: SID IIs Pelvis Iliac Calibration
 ATD Serial No.: 307


Test Date: 11/23/10
 Test I.D.: PLF11B




Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Pendulum Velocity	m/s	4.2 to 4.4	4.36	Pass
Peak Iliac Force	Newtons	4100 to 5100	4490.8	Pass
Peak Pelvis Y Acceleration	G's	28 to 39	34.4	Pass
Peak Impactor Acceleration	G's	36 to 45	37.9	Pass
Overall Test Results			Pass	

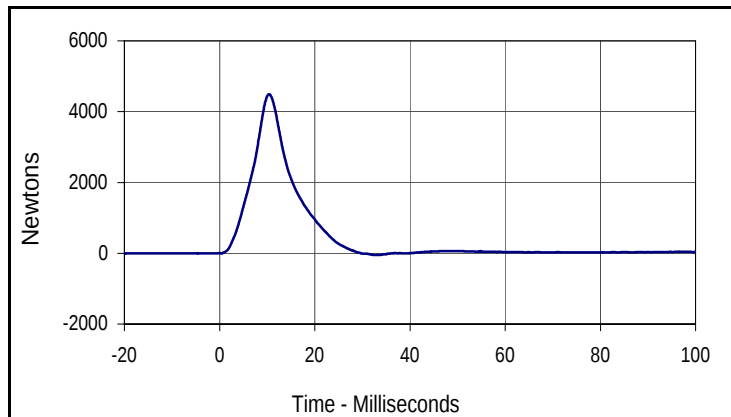

Curve Description			
Pelvis Iliac Force			
CURNO	Type	SAE Class	Units
001	FIL	600	Newtons
Max	Time	Min	Time
4490.8	10.4	-48.5	33.0

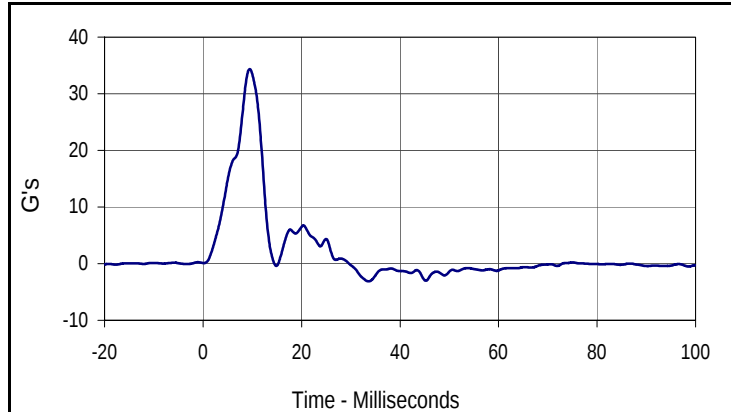

Curve Description			
Pelvis Y Acceleration			
CURNO	Type	SAE Class	Units
002	FIL	180	G's
Max	Time	Min	Time
34.4	9.5	-3.1	33.6

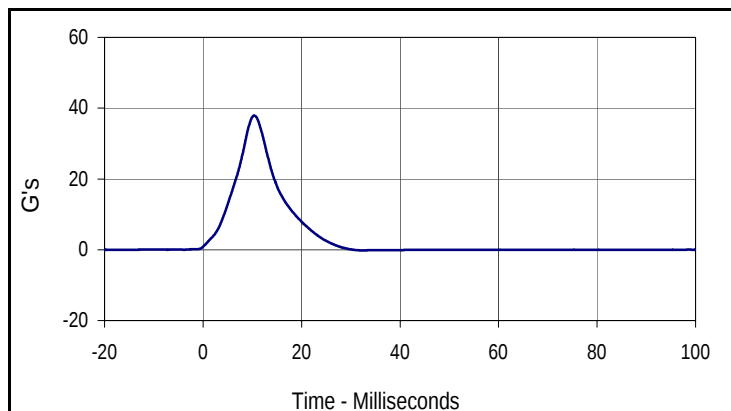

Curve Description			
Impactor Acceleration			
CURNO	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
37.9	10.4	-0.2	32.3


APPENDIX C
POST-TEST / HIII CONFIGURATION AND PERFORMANCE VERIFICATION DATA

Test Program: ES2re Neck Calibration
 ATD Serial No.: F035


Test Date: 12/2/10
 Test I.D.: NB12A



Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		°C	20.6 to 22.2	21.7	Pass
Laboratory Relative Humidity		%	10 to 70	29	Pass
Pendulum Velocity		m/s	3.30 to 3.50	3.35	Pass
Pendulum Deceleration	1 msec	m/s	0.0 to -.050	-0.038	Pass
	3 msec	m/s	-.250 to -.375	-0.255	Pass
	14 msec	m/s	-3.20 to -3.70	-3.26	Pass
Headform Rotation	Max	Degrees	49.0 to 58.0	51.1	Pass
	Time	msec	54.0 to 66.0	60.8	Pass
Maximum Rotation To Time Zero Crossing		msec	53.0 to 88.0	58.3	Pass
			Overall Test Results		Pass

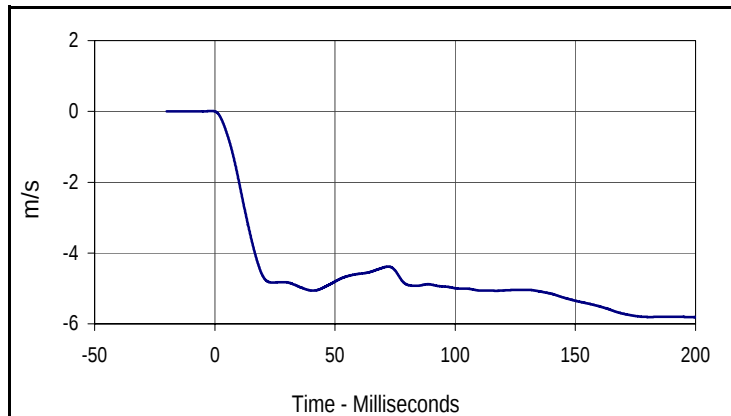

Curve Description			
Pendulum Velocity			
CURNO	Type	SAE Class	Units
001	FIL	60	m/s
Max	Time	Min	Time
0.0	-1.3	-5.8	200.0

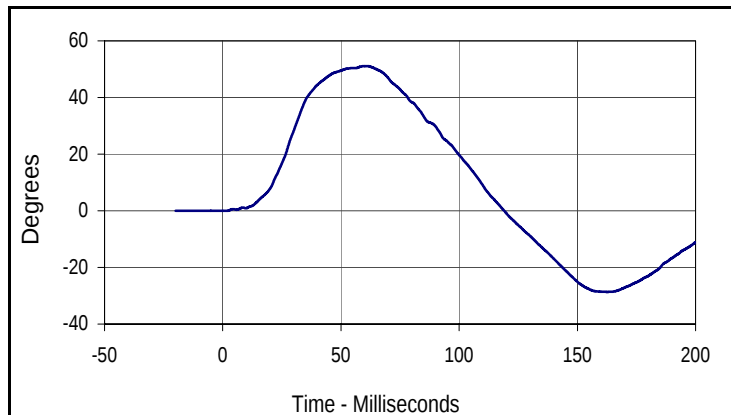


Curve Description			
Headform Rotation			
CURNO	Type	SAE Class	Units
002	FIL	180	Degrees
Max	Time	Min	Time
51.1	60.8	-28.6	162.5

Test Program: ES2re Shoulder Calibration
 ATD Serial No.: F035

Test Date: 12/2/10
 Test I.D.: SH12A



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	4.20 to 4.40	4.25	Pass
Peak Impactor Acceleration	G's	7.5 to 10.5	9.79	Pass
Overall Test Results			Pass	

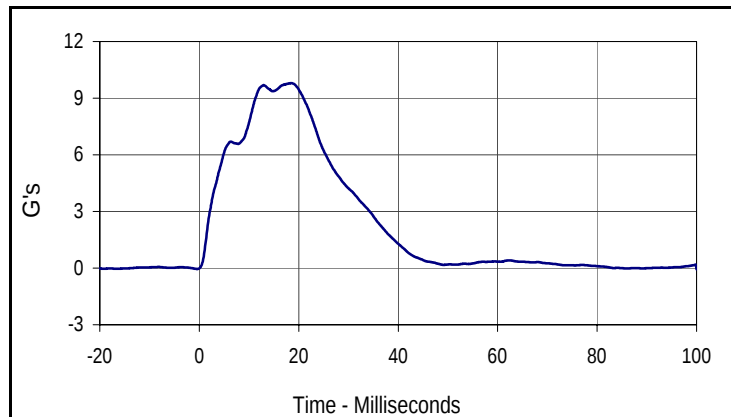


Curve Description			
Impactor Acceleration			
CURNO	Type	SAE Class	Units
001	FIL	180	G's
Max	Time	Min	Time
9.8	18.5	0.0	-0.4

Test Program: ES2re Rib Module Calibration
 ATD Serial No.: F035 Rib #1


Test Date: 12/2/10
 Test I.D.: RIB12A



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Peak Rib Deflection at 459 MM Drop Height	MM	36 to 40	37.4	Pass
Peak Rib Deflection at 815 MM Drop Height	MM	46 to 51	46.4	Pass
Overall Test Results			Pass	

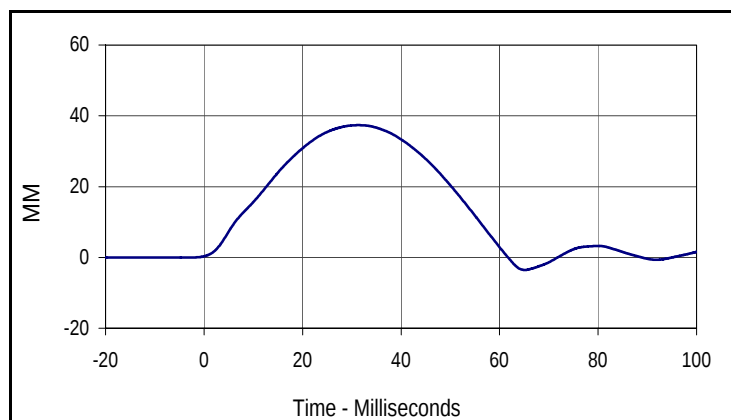

Curve Description			
Upper Rib Deflection (459 MM Drop Height)			
CURNO	Type	SAE Class	Units
001	FIL	180	MM
Max	Time	Min	Time
37.4	31.4	-3.5	65.1

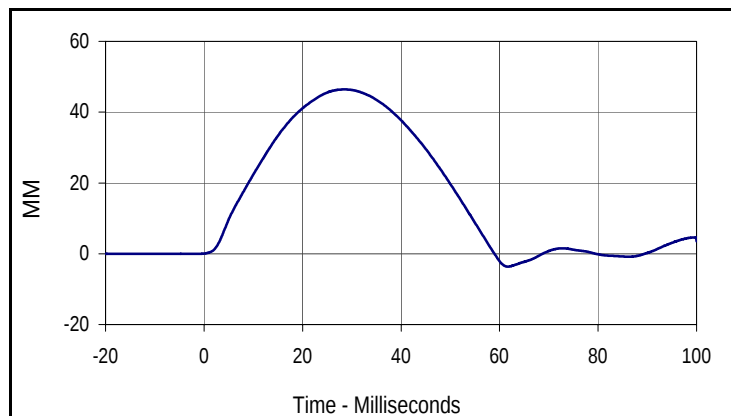


Curve Description			
Upper Rib Deflection (815 MM Drop Height)			
CURNO	Type	SAE Class	Units
001	FIL	180	MM
Max	Time	Min	Time
46.4	28.6	-3.6	61.7

Test Program: ES2re Rib Module Calibration
 ATD Serial No.: F035 Rib #2


Test Date: 12/2/10
 Test I.D.: RIB12B



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Peak Rib Deflection at 459 MM Drop Height	MM	36 to 40	37.6	Pass
Peak Rib Deflection at 815 MM Drop Height	MM	46 to 51	47.9	Pass
Overall Test Results			Pass	

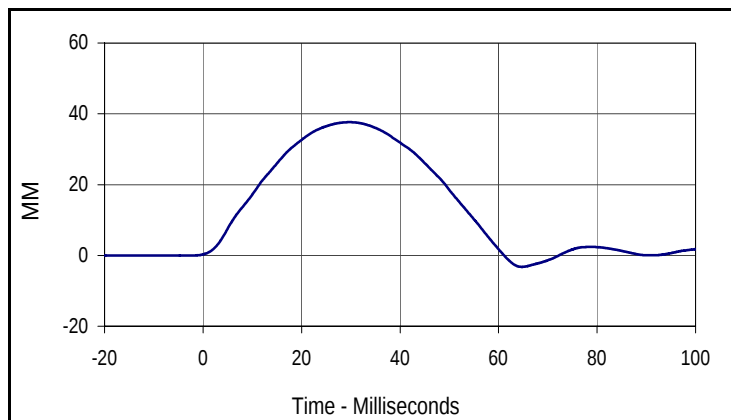

Curve Description			
Middle Rib Deflection (459 MM Drop Height)			
CURNO	Type	SAE Class	Units
001	FIL	180	MM
Max	Time	Min	Time
37.6	29.7	-3.2	64.7

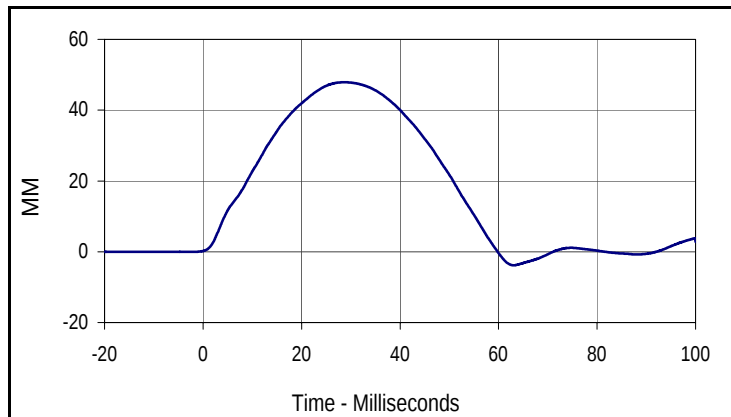


Curve Description			
Middle Rib Deflection (815 MM Drop Height)			
CURNO	Type	SAE Class	Units
001	FIL	180	MM
Max	Time	Min	Time
47.9	28.7	-3.8	63.1

Test Program: ES2re Rib Module Calibration
 ATD Serial No.: F035 Rib #3


Test Date: 12/2/10
 Test I.D.: RIB12C



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Peak Rib Deflection at 459 MM Drop Height	MM	36 to 40	36.9	Pass
Peak Rib Deflection at 815 MM Drop Height	MM	46 to 51	47.0	Pass
Overall Test Results			Pass	

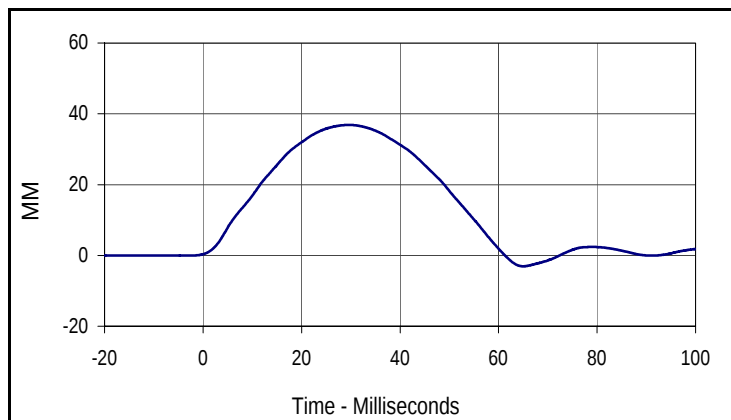

Curve Description			
Lower Rib Deflection (459 MM Drop Height)			
CURNO	Type	SAE Class	Units
001	FIL	180	MM
Max	Time	Min	Time
36.9	29.6	-3.1	65.0

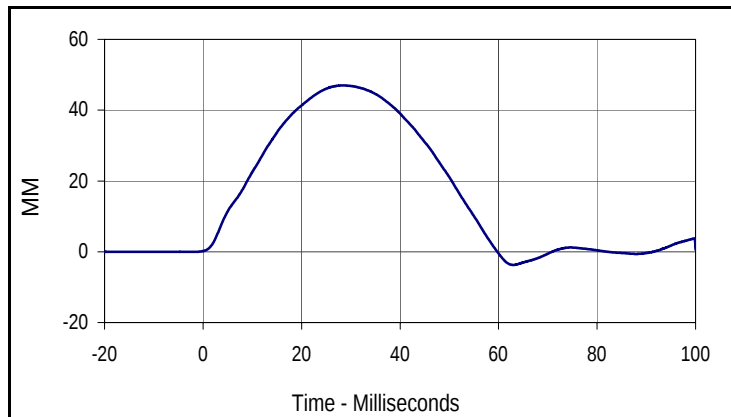


Curve Description			
Lower Rib Deflection (815 MM Drop Height)			
CURNO	Type	SAE Class	Units
001	FIL	180	MM
Max	Time	Min	Time
47.0	28.4	-3.7	63.0

Test Program: ES2re Thorax Calibration
 ATD Serial No.: F035


Test Date: 12/2/10
 Test I.D.: TH12A



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	5.40 to 5.60	5.44	Pass
Impactor Force	N	5100 to 6200	5554.7	Pass
	msec	> 6.0 msec	9.2	Pass
Upper Rib Deflection	MM	34 to 41	36.6	Pass
Middle Rib Deflection	MM	37 to 45	40.0	Pass
Lower Rib Deflection	MM	37 to 44	41.3	Pass
Overall Test Results			Pass	

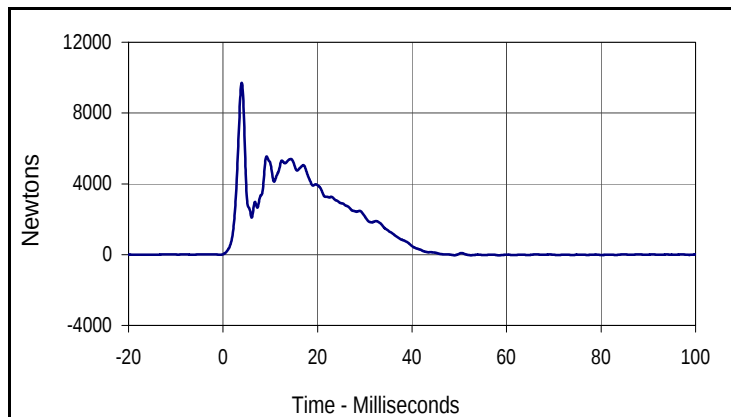

Curve Description			
Impactor Force			
CURNO	Type	SAE Class	Units
001	FIL	180	Newtons
Max	Time	Min	Time
9708.3	4.0	-35.5	58.3

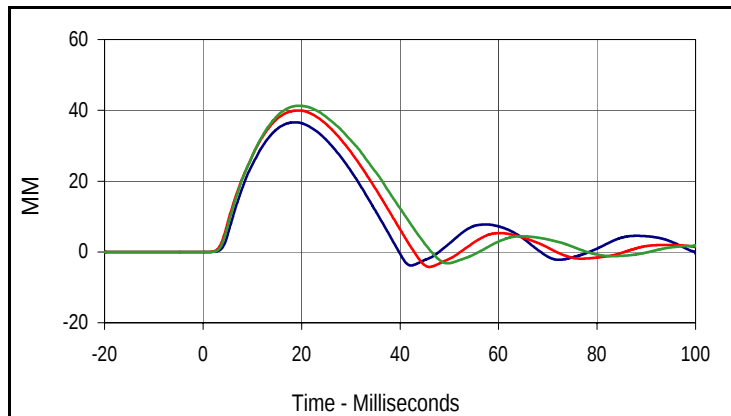


Curve Description			
Upper, Middle, Lower Rib Deflections			
CURNO(s)	Type	SAE Class	Units
002-003-004	FIL	180	MM
Max (Upper)	Time	Min (Upper)	Time
36.6	18.7	-3.8	42.2
Max (Middle)	Time	Min (Middle)	Time
40.0	19.4	-4.2	46.0
Max (Lower)	Time	Min (Lower)	Time
41.3	19.5	-3.2	49.7

Test Program: ES2re Abdomen Calibration
 ATD Serial No.: F035


Test Date: 12/2/10
 Test I.D.: ABD12A



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.7	Pass
Laboratory Relative Humidity	%	10 to 70	29	Pass
Probe Velocity	m/s	3.90 to 4.10	3.96	Pass
Impactor Force	N	4000 to 4800	4363.1	Pass
	msec	10.6 to 13.0	11.4	Pass
Abdominal Force	N	2200 to 2700	2446.0	Pass
	msec	10.0 to 12.3	11.1	Pass
Overall Test Results				Pass

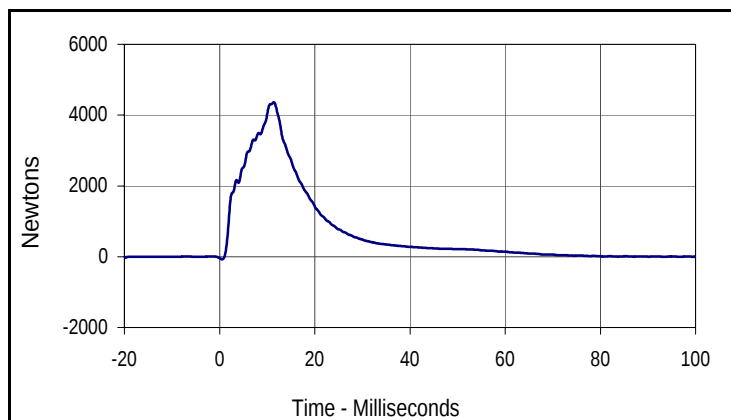

Curve Description			
Impactor Force			
CURNO	Type	SAE Class	Units
001	FIL	180	Newtons
Max	Time	Min	Time
4363.1	11.4	-71.5	0.6

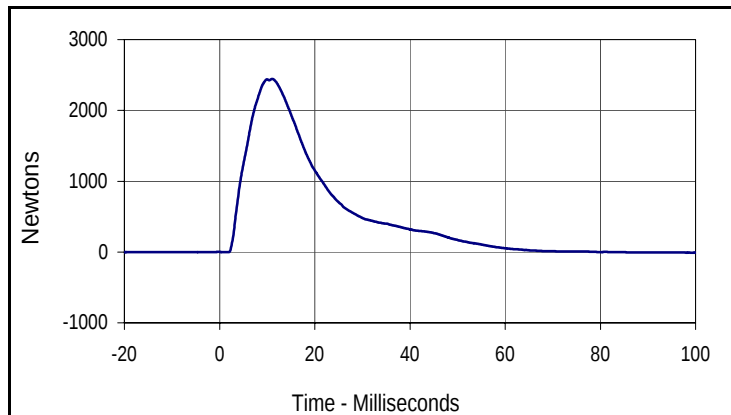


Curve Description			
Abdomen Sum Resultant			
CURNO	Type	SAE Class	Units
002	RES	600	Newtons
Max	Time	Min	Time
2446.0	11.1	-9.1	99.8

Test Program: ES2re Lumbar Spine Calibration
 ATD Serial No.: F035


Test Date: 12/2/10
 Test I.D.: SP12A



Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Velocity		m/s	5.95 to 6.15	5.99	Pass
Pendulum Deceleration	1 msec	m/s	0.0 to -.050	-0.032	Pass
	3.7 msec	m/s	-.240 to -.425	-0.423	Pass
	27 msec	m/s	-5.80 to -6.50	-5.99	Pass
	30 msec	m/s	< -6.50	-6.46	Pass
Headform Rotation	Max	Degrees	45.0 to 55.0	52.9	Pass
	Time	msec	39.0 to 53.0	42.6	Pass
Maximum Rotation To Time Zero Crossing		msec	37.0 to 57.0	40.7	Pass
			Overall Test Results		Pass

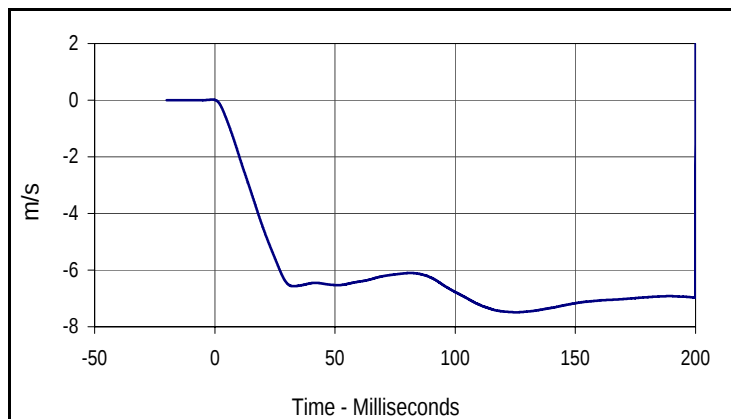

Curve Description			
Pendulum Velocity			
CURNO	Type	SAE Class	Units
001	FIL	60	m/s
Max	Time	Min	Time
3.7	200.0	-7.5	125.4

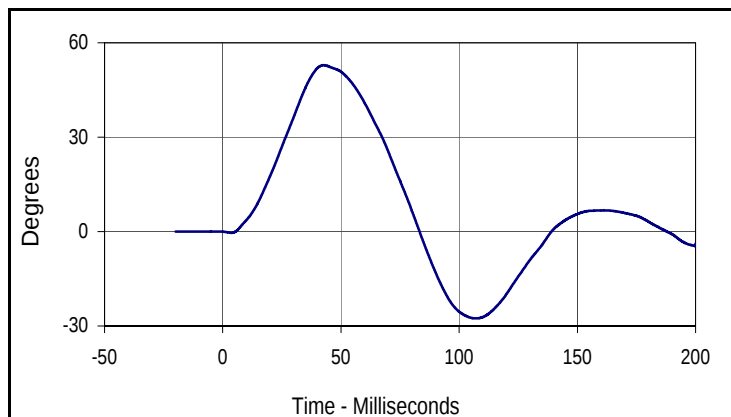


Curve Description			
Headform Rotation			
CURNO	Type	SAE Class	Units
002	FIL	180	Degrees
Max	Time	Min	Time
52.9	42.6	-27.6	107.0

Test Program: ES2re Pelvis Calibration
 ATD Serial No.: F035


Test Date: 12/2/10
 Test I.D.: PL12A



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	4.20 to 4.40	4.28	Pass
Impactor Force	N	4700 to 5400	4812.8	Pass
	msec	11.8 to 16.1	12.6	Pass
Pubic Symphysis Load	N	-1230 to -1590	-1443.0	Pass
	msec	12.2 to 17.0	13.7	Pass
Overall Test Results				Pass

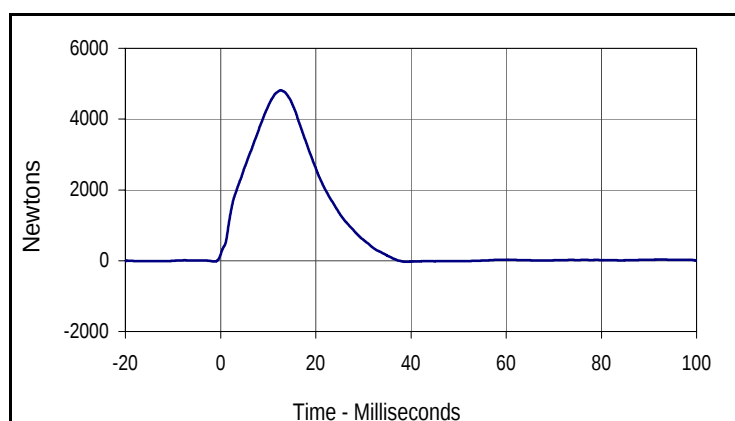

Curve Description			
Impactor Force			
CURNO	Type	SAE Class	Units
001	FIL	180	Newtons
Max	Time	Min	Time
4812.8	12.6	-28.5	39.4

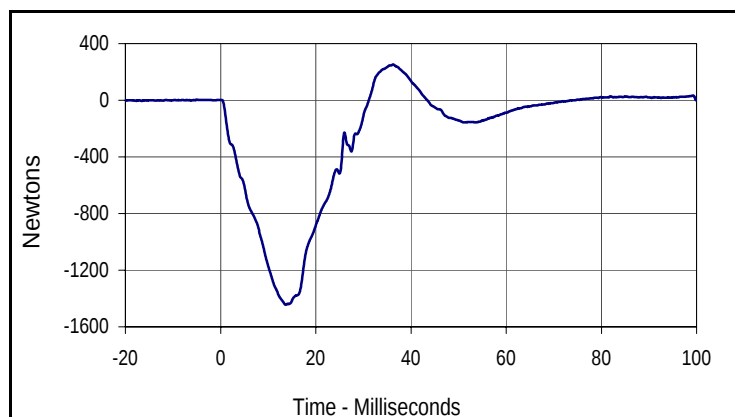


Curve Description			
Pubic FY			
CURNO	Type	SAE Class	Units
002	FIL	600	Newtons
Max	Time	Min	Time
252.6	36.3	-1443.0	13.7

Test Program: ES2re Lateral Head Drop Calibration
 ATD Serial No.: F035


Test Date: 12/2/10
 Test I.D.: HD12A



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Peak Resultant Acceleration	G's	125 to 155	137.6	Pass
Peak Longitudinal Acceleration	G's	≤15	5.0	Pass
Is Acceleration Unimodal?	Yes/No	Yes	Yes	Pass
Oscillations After Main Pulse	%	<15	6.8	Pass
Overall Test Results			Pass	

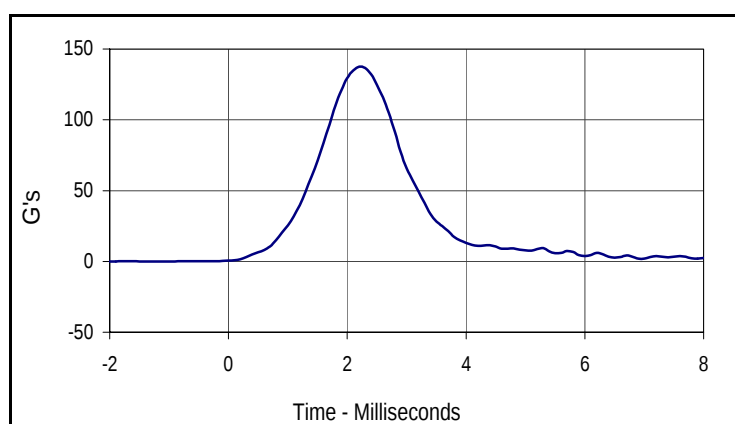

Curve Description			
Head Resultant			
CURNO	Type	SAE Class	Units
001	RES	1000	G's
Max	Time	Min	Time
137.6	2.2	0.0	-2.0

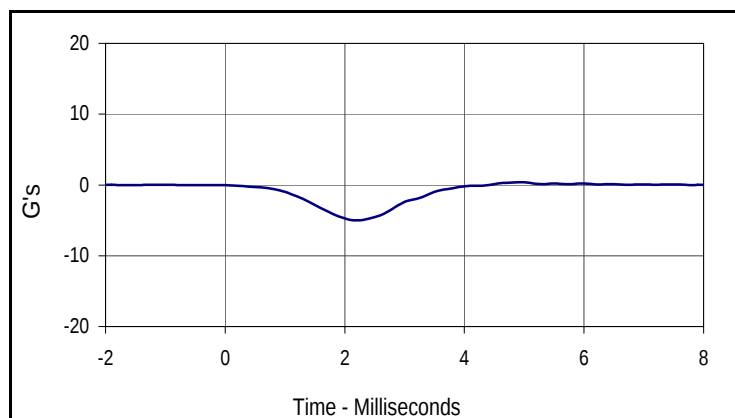


Curve Description			
Head X			
CURNO	Type	SAE Class	Units
002	FIL	1000	G's
Max	Time	Min	Time
0.4	4.9	-5.0	2.2

Test Program: SID IIs Lateral Head Drop Calibration
 ATD Serial No.: 307


Test Date: 12/2/10
 Test I.D.: HDF12A



Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Peak Resultant Acceleration	G's	115 to 137	129.5	Pass
Peak Longitudinal Acceleration	G's	≤15	3.8	Pass
Is Acceleration Unimodal?	Yes/No	Yes	Yes	Pass
Oscillations After Main Pulse	%	<15	6.8	Pass
Overall Test Results			Pass	

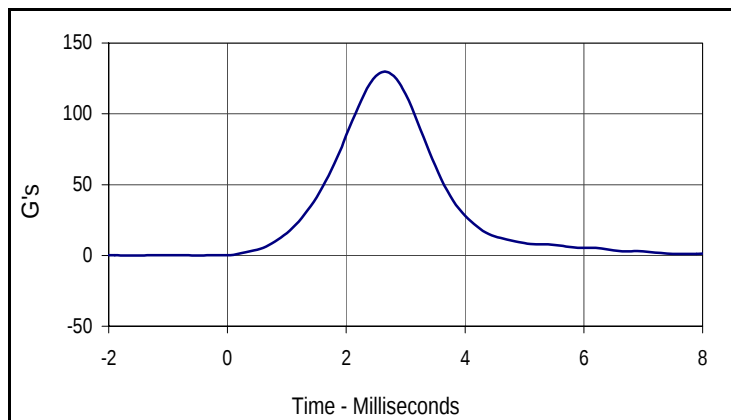

Curve Description			
Head Resultant			
CURNO	Type	SAE Class	Units
001	RES	1000	G's
Max	Time	Min	Time
129.5	2.7	0.0	-0.6

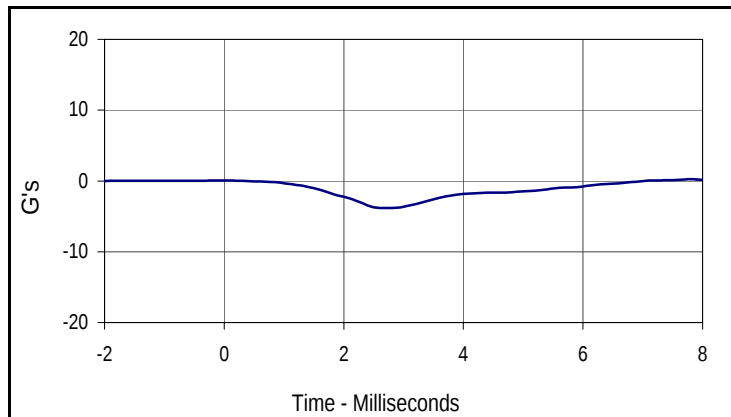


Curve Description			
Head X			
CURNO	Type	SAE Class	Units
002	FIL	1000	G's
Max	Time	Min	Time
0.1	-0.1	-3.8	2.7

Test Program: SID IIs Neck Calibration
 ATD Serial No.: 307


Test Date: 12/2/10
 Test I.D.: NBF12A




Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Velocity		m/s	5.51 to 5.63	5.52	Pass
Pendulum Deceleration	10 msec	m/s	-2.20 to -2.80	-2.3	Pass
	15 msec	m/s	-3.30 to -4.10	-3.5	Pass
	20 msec	m/s	-4.40 to -5.40	-4.6	Pass
	25 msec	m/s	-5.40 to -6.10	-5.5	Pass
	25-100 msec	m/s	-5.50 to -6.20	-6.1	Pass
Translation-Rotation	Max	Degrees	71.0 to 81.0	76.2	Pass
	Time	msec	50.0 to 70.0	65.6	Pass
Peak Occipital Condyle Moment		Nm	-36.0 to -44.0	-38.5	Pass
Decaying Moment Time to Cross 0 Nm		msec	102.0 to 126.0	120.5	Pass
			Overall Test Results		Pass

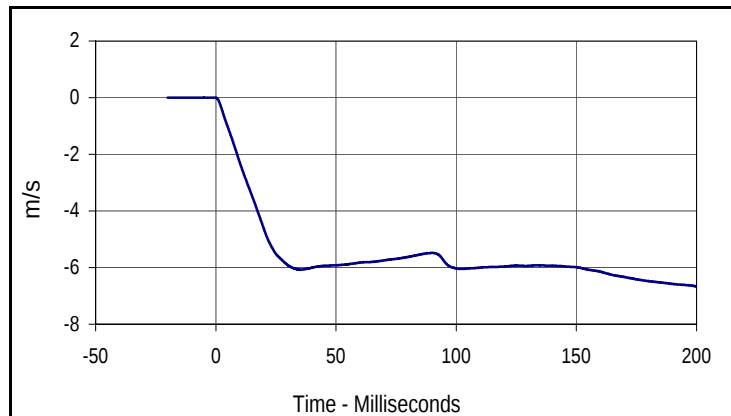

Curve Description			
Pendulum Velocity			
CURNO	Type	SAE Class	Units
001	FIL	180	m/s
Max	Time	Min	Time
0.0	-0.5	-6.7	200.0

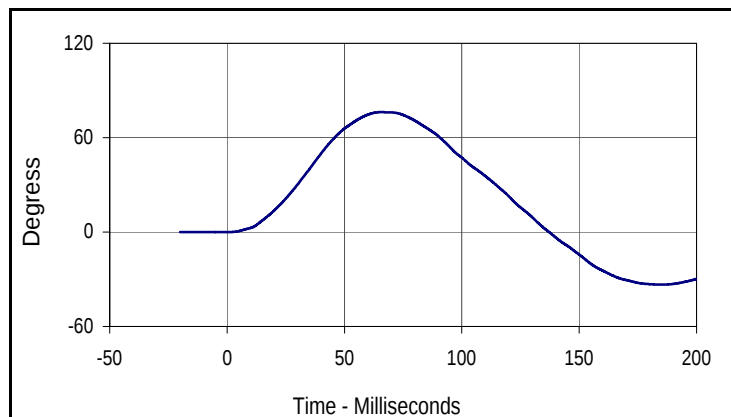

Curve Description			
Maximum Translation Rotation			
CURNO	Type	SAE Class	Units
002	FIL	60	Degress
Max	Time	Min	Time
76.2	65.6	-33.4	184.8

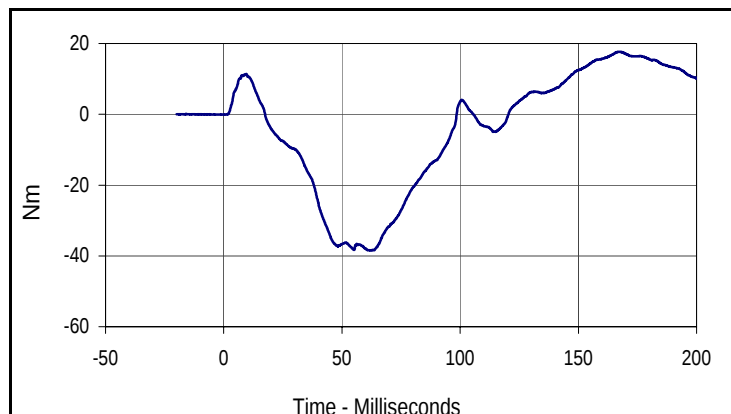


Curve Description			
Moment About Occipital Condyle			
CURNO	Type	SAE Class	Units
003	FIL	600	Nm
Max	Time	Min	Time
17.7	167.2	-38.5	62.5

Test Program: SID IIs Shoulder Calibration
 ATD Serial No.: 307


Test Date: 12/2/10
 Test I.D.: SHF12A




Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.7	Pass
Laboratory Relative Humidity	%	10 to 70	29	Pass
Pendulum Velocity	m/s	4.20 to 4.40	4.30	Pass
Shoulder Deflection	MM	28 to 37	33.0	Pass
Peak Upper Spine Y Acceleration	G's	17 to 22	18.1	Pass
Peak Impactor Acceleration	G's	13 to 18	14.7	Pass
Overall Test Results			Pass	

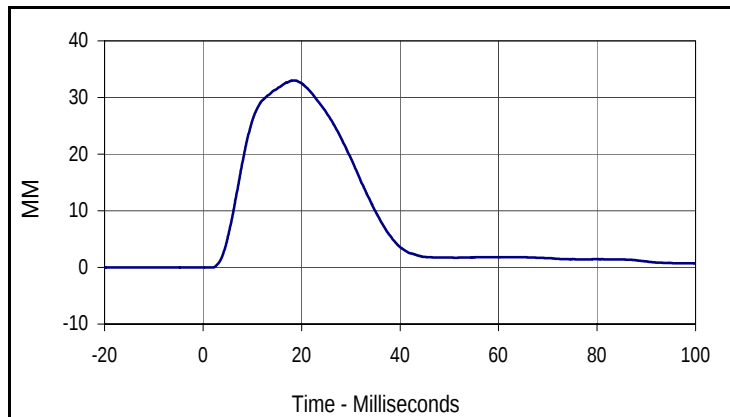

Curve Description			
Shoulder Acceleration			
CURNO	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
33.0	18.6	0.0	1.0

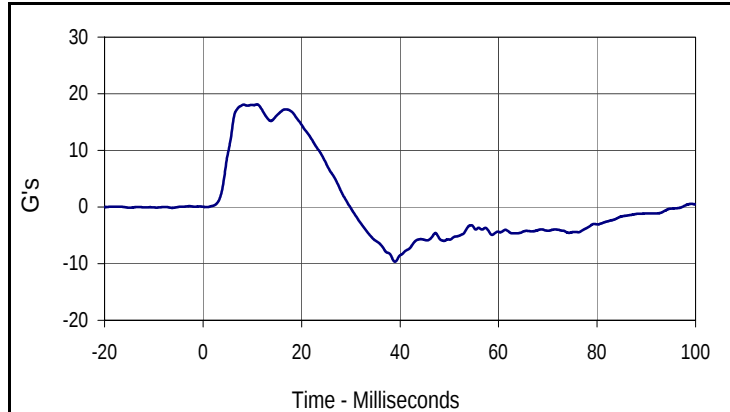

Curve Description			
Upper Spine Y Acceleration			
CURNO	Type	SAE Class	Units
002	FIL	180	G's
Max	Time	Min	Time
18.1	11.0	-9.6	39.0

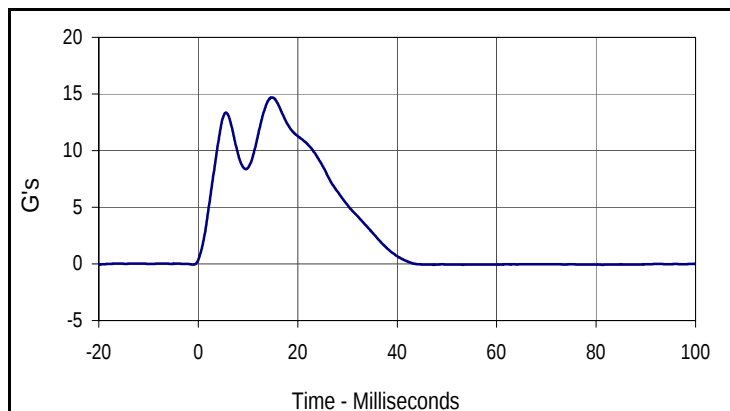


Curve Description			
Impactor Acceleration			
CURNO	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
14.7	14.8	-0.1	81.3

Test Program: SID IIs Thorax with Arm Calibration
 ATD Serial No.: 307


Test Date: 12/2/10
 Test I.D.: THF12A




Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.7	Pass
Laboratory Relative Humidity	%	10 to 70	29	Pass
Pendulum Velocity	m/s	6.60 to 6.80	6.75	Pass
Shoulder Deflection	MM	31 to 40	34.0	Pass
Upper Thorax Rib Deflection	MM	25 to 32	27.0	Pass
Middle Thorax Rib Deflection	MM	30 to 36	31.9	Pass
Lower Thorax Rib Deflection	MM	32 to 38	34.3	Pass
Peak Upper Spine Y Acceleration	G's	34 to 43	37.8	Pass
Peak Lower Spine Y Acceleration	G's	29 to 37	31.9	Pass
Peak Impactor Acceleration After 5 msec.	G's	30 to 36	32.4	Pass
Overall Test Results			Pass	

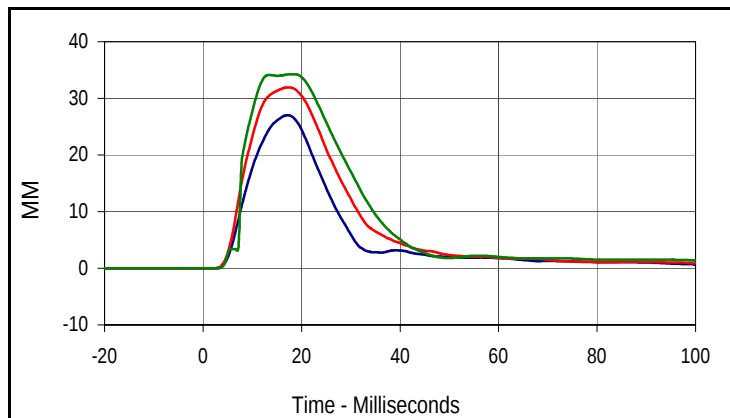

Curve Description			
Upper Thorax Deflection			
CURNO	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
27.0	17.2	0.0	-12.8
Middle Thorax Deflection			
Max	Time	Min	Time
31.9	17.4	0.0	-3.0
Lower Thorax Deflection			
Max	Time	Min	Time
34.3	18.4	0.0	-17.7

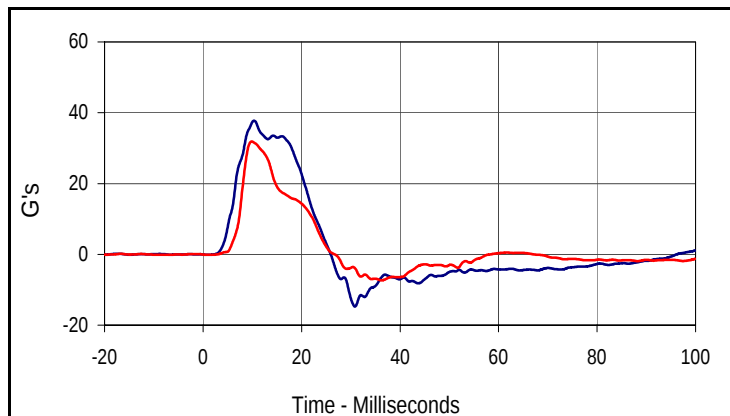

Curve Description			
Upper Spine Y Acceleration			
CURNO	Type	SAE Class	Units
004	FIL	180	G's
Max	Time	Min	Time
37.8	10.4	-14.8	30.8
Lower Spine Y Acceleration			
CURNO	Type	SAE Class	Units
005	FIL	180	G's
Max	Time	Min	Time
31.9	9.9	-7.3	36.2

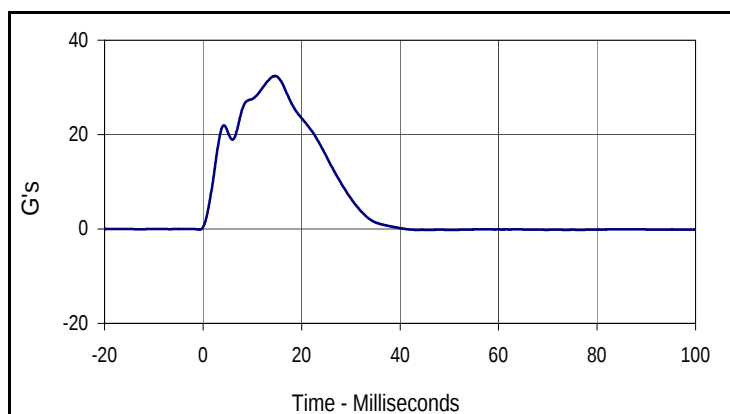


Curve Description			
Impactor Acceleration			
CURNO	Type	SAE Class	Units
006	FIL	180	G's
Max	Time	Min	Time
32.4	14.6	-0.2	50.4

Test Program: SID IIs Thorax w/o Arm Calibration
 ATD Serial No.: 307


Test Date: 12/2/10
 Test I.D.: TOA12A




Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Pendulum Velocity	m/s	4.20 to 4.40	4.36	Pass
Upper Thorax Rib Deflection	MM	32 to 40	39.8	Pass
Middle Thorax Rib Deflection	MM	39 to 45	43.1	Pass
Lower Thorax Rib Deflection	MM	35 to 43	41.3	Pass
Peak Upper Spine Y Acceleration	G's	13 to 17	14.3	Pass
Peak Lower Spine Y Acceleration	G's	7 to 11	9.6	Pass
Peak Impactor Acceleration	G's	14 to 18	17.7	Pass
Overall Test Results			Pass	

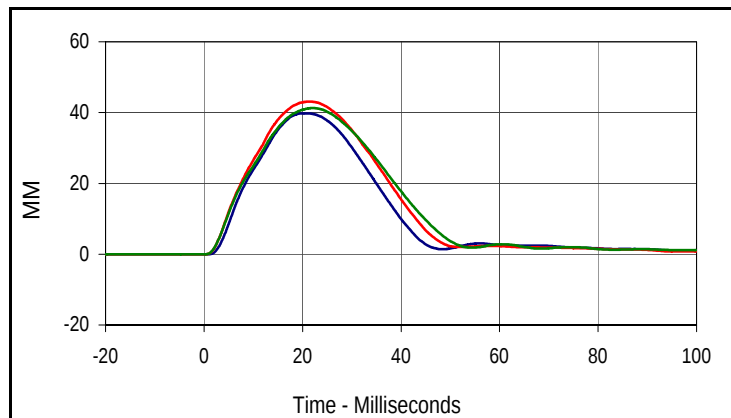

Curve Description			
Upper Thorax Deflection			
CURNO	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
39.8	20.5	0.0	-0.1
Middle Thorax Deflection			
Max	Time	Min	Time
43.1	21.4	0.0	-4.1
Lower Thorax Deflection			
Max	Time	Min	Time
41.3	22.0	0.0	0.2

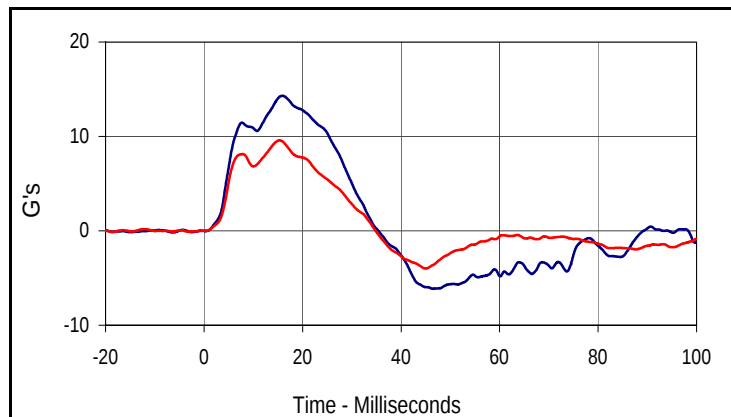

Curve Description			
Upper Spine Y Acceleration			
CURNO	Type	SAE Class	Units
004	FIL	180	G's
Max	Time	Min	Time
14.3	15.9	-6.1	46.5
Lower Spine Y Acceleration			
CURNO	Type	SAE Class	Units
005	FIL	180	G's
Max	Time	Min	Time
9.6	15.3	-4.0	45.0

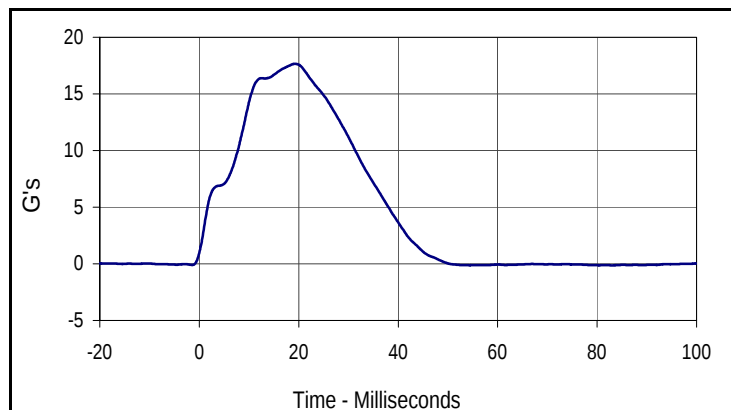


Curve Description			
Impactor Acceleration			
CURNO	Type	SAE Class	Units
006	FIL	180	G's
Max	Time	Min	Time
17.7	19.3	-0.1	83.0

Test Program: SID IIs Abdomen Calibration
 ATD Serial No.: 307

Test Date: 12/2/10
 Test I.D.: ABDF12A




Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.7	Pass
Laboratory Relative Humidity	%	10 to 70	29	Pass
Pendulum Velocity	m/s	4.20 to 4.40	4.30	Pass
Upper Abdominal Rib Deflection	MM	36 to 47	42.0	Pass
Lower Abdominal Rib Deflection	MM	33 to 44	37.5	Pass
Peak Lower Spine Y Acceleration	G's	9 to 14	10.9	Pass
Peak Impactor Acceleration	G's	12 to 16	13.9	Pass
Overall Test Results			Pass	

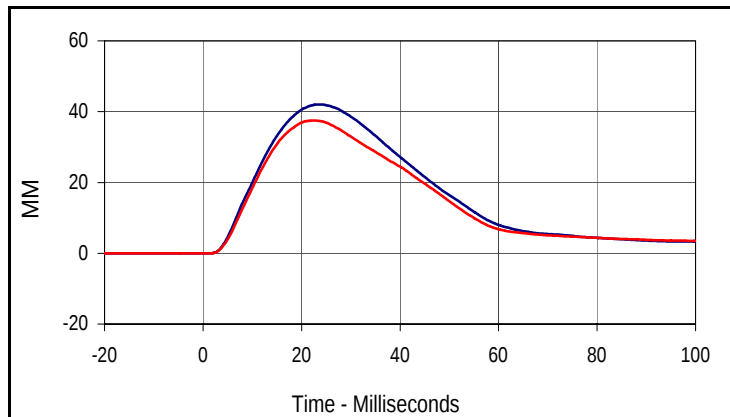


Curve Description			
Upper Abdominal Rib Deflection			
CURNO	Type	SAE Class	Units
001	FIL	600	MM
Max	Time	Min	Time
42.0	23.5	0.0	-6.3

Curve Description			
Lower Abdominal Rib Deflection			
CURNO	Type	SAE Class	Units
002	FIL	600	MM
Max	Time	Min	Time
37.5	22.3	0.0	-5.6

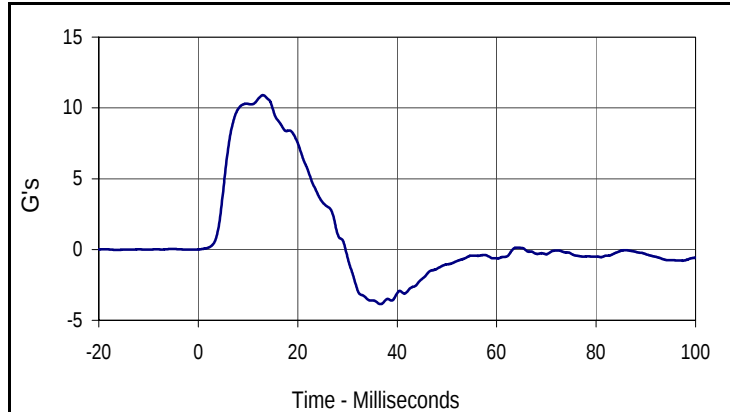

Curve Description			
Lower Spine Y Acceleration			
CURNO	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
10.9	13.0	-3.9	36.7

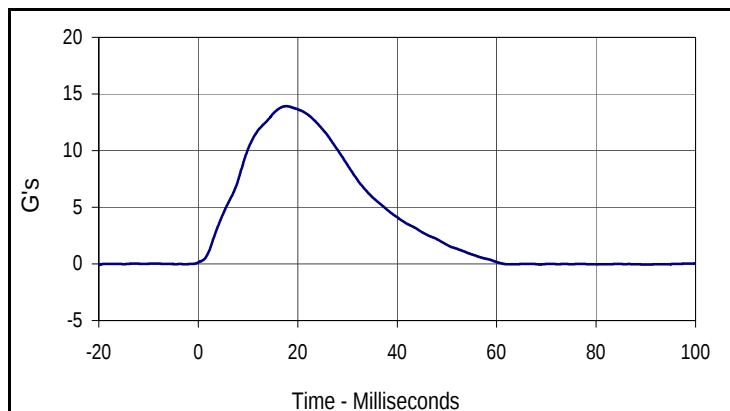


Curve Description			
Impactor Acceleration			
CURNO	Type	SAE Class	Units
004	FIL	180	G's
Max	Time	Min	Time
13.9	17.7	-0.1	-20.0

Test Program: SID IIs Pelvis Acetabulum Calibration
 ATD Serial No.: 307


Test Date: 12/2/10
 Test I.D.: PA12A




Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.7	Pass
Laboratory Relative Humidity	%	10 to 70	29	Pass
Pendulum Velocity	m/s	6.60 to 6.80	6.68	Pass
Peak Acetabulum Force	Newtons	3600 to 4300	4015.9	Pass
Peak Pelvis Y Acceleration After 6 msec.	G's	34 to 42	36.4	Pass
Peak Impactor Acceleration	G's	38 to 47	41.7	Pass
Overall Test Results			Pass	

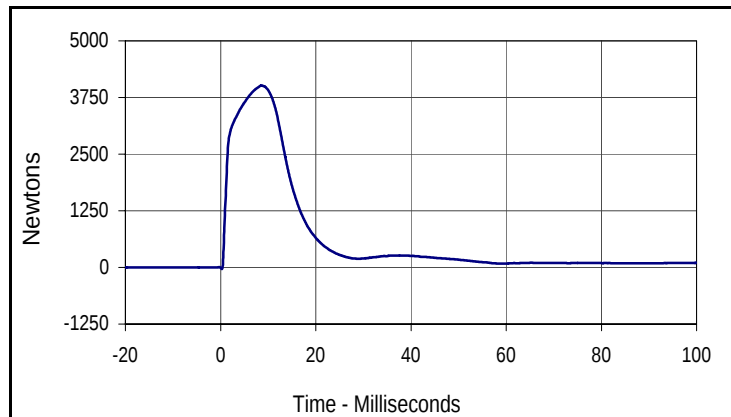

Curve Description			
Pelvis Acetabulum Force			
CURNO	Type	SAE Class	Units
001	FIL	600	Newtons
Max	Time	Min	Time
4015.9	8.6	-34.8	0.3

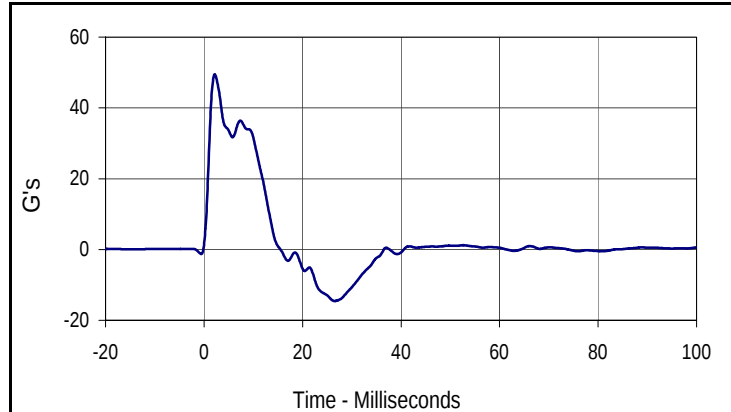

Curve Description			
Pelvis Y Acceleration			
CURNO	Type	SAE Class	Units
002	FIL	180	G's
Max	Time	Min	Time
49.5	2.2	-14.6	26.5

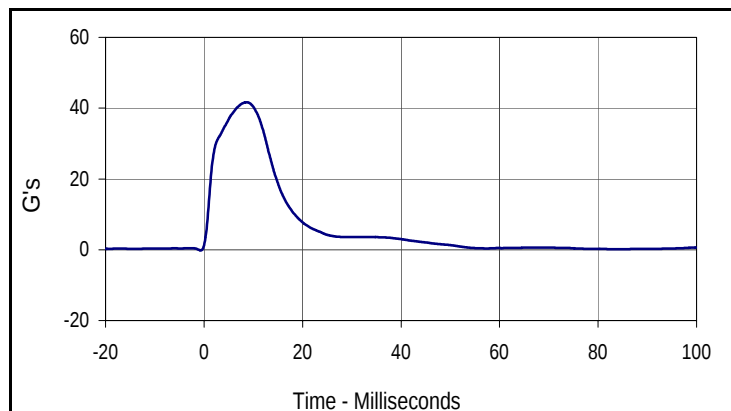


Curve Description			
Impactor Acceleration			
CURNO	Type	SAE Class	Units
003	FIL	180	G's
Max	Time	Min	Time
41.7	8.7	-0.2	-0.7

Test Program: SID IIs Pelvis Iliac Calibration
 ATD Serial No.: 307


Test Date: 12/2/10
 Test I.D.: PLF12A




Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	°C	20.6 to 22.2	21.7	Pass
Laboratory Relative Humidity	%	10 to 70	29	Pass
Pendulum Velocity	m/s	4.2 to 4.4	4.33	Pass
Peak Iliac Force	Newtons	4100 to 5100	4569.4	Pass
Peak Pelvis Y Acceleration	G's	28 to 39	33.1	Pass
Peak Impactor Acceleration	G's	36 to 45	36.6	Pass
Overall Test Results			Pass	

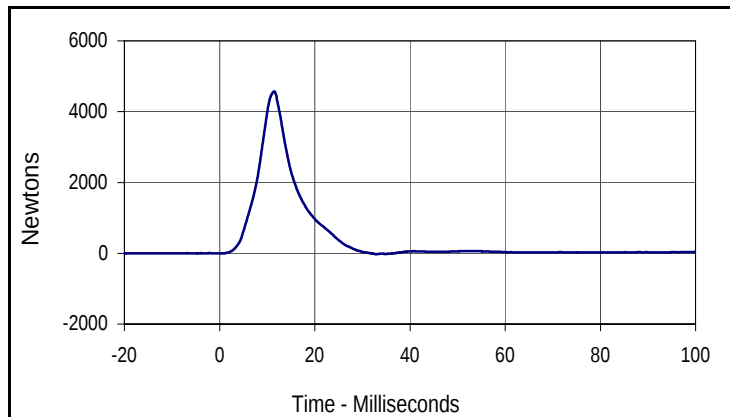

Curve Description			
Pelvis Iliac Force			
CURNO	Type	SAE Class	Units
001	FIL	600	Newtons
Max	Time	Min	Time
4569.4	11.5	-25.7	32.9

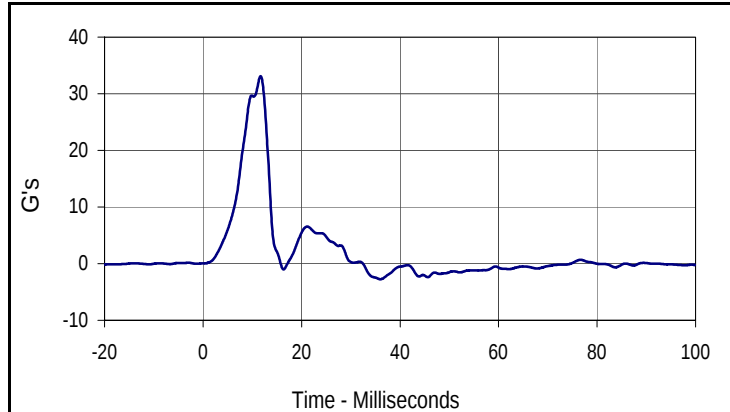

Curve Description			
Pelvis Y Acceleration			
CURNO	Type	SAE Class	Units
002	FIL	180	G's
Max	Time	Min	Time
33.1	11.7	-2.8	36.0

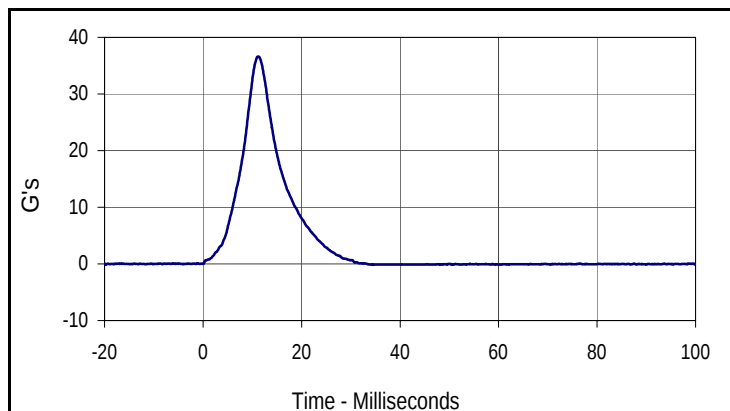

Curve Description			
Impactor Acceleration			
CURNO	Type	SAE Class	Units
003	FIL	1000	G's
Max	Time	Min	Time
36.6	11.2	-0.1	34.6