

REPORT NUMBER: NCAP-MGA-2012-030

**NEW CAR ASSESSMENT PROGRAM (NCAP)
Frontal Barrier Impact Test**

**CHRYSLER GROUP LLC
2012 Ram 1500 ST Quad Cab 4x4
NHTSA No.: MC0303**

**MGA RESEARCH CORPORATION
5000 Warren Road
Burlington, WI 53105**



Test Date: November 22, 2011


Final Report Date: December 28, 2011

FINAL REPORT

**U.S. DEPARTMENT OF TRANSPORTATION
National Highway Traffic Safety Administration
Office of Crashworthiness Standards
Mail Code: NVS-111
1200 New Jersey Ave, SE
Room W43-410
Washington, DC 20590**

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof.

If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: 
Donna Janovicz, Project Manager

Approved by: 
Ben Fischer, Project Engineer

Approval Date: December 28, 2011

FINAL REPORT ACCEPTANCE BY OCWS:

Division Chief, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

COTR, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

Technical Report Documentation Page

1. Report No. NCAP-MGA-2012-030	2. Government Accession No.	3. Recipient's Catalog No.																																																			
4. Title and Subtitle Final Report of New Car Assessment Program Frontal Impact Testing of 2012 Ram 1500 ST Quad Cab 4x4, NHTSA No.: MC0303		5. Report Date December 28, 2011																																																			
		6. Performing Organization Code MGA																																																			
7. Author(s) Donna Janovicz, Project Manager Ben Fischer, Project Engineer		8. Performing Organization Report No. NCAP-MGA-2012-030																																																			
9. Performing Organization Name and Address MGA Research Corporation 5000 Warren Road Burlington, WI 53105		10. Work Unit No.																																																			
		11. Contract or Grant No. DTNH22-06-D-00028																																																			
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards 1200 New Jersey Ave, SE, Room W43-410 Washington, D.C. 20590		13. Type of Report and Period Covered Final Test Report November 22 to December 28, 2011																																																			
		14. Sponsoring Agency Code NVS-111																																																			
15. Supplementary Notes																																																					
16. Abstract A 56.3 km/h NCAP Frontal Impact Test was conducted on the 2012 Ram 1500 ST Quad Cab 4x4 in accordance with the specifications of the Office of Crashworthiness Standards Frontal NCAP Laboratory Test Procedure. This test was conducted to obtain data indicant of FMVSS 208, 212, 219 (partial), 301, and foot well intrusion performance. The test was conducted at MGA Research Corporation in Burlington, Wisconsin, on November 22, 2011. The impact velocity was 56.2 km/h and the ambient temperature at the barrier face at the time of impact was 21.7°C. The target vehicle post-test maximum crush was 395 mm located at the vehicle's centerline. The test vehicle's performance was as follows:																																																					
<table border="1" style="width: 100%; border-collapse: collapse; background-color: #ffff00;"> <thead> <tr> <th rowspan="2">Measurement Description</th> <th rowspan="2">Units</th> <th colspan="2">Threshold</th> <th rowspan="2">Driver ATD</th> <th rowspan="2">Passenger ATD</th> </tr> <tr> <th>50th</th> <th>5th</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC₁₅)</td> <td>N/A</td> <td>700</td> <td>700</td> <td>254</td> <td>306</td> </tr> <tr> <td>Maximum Chest Compression</td> <td>mm</td> <td>63</td> <td>52</td> <td>25</td> <td>11</td> </tr> <tr> <td>Nij</td> <td>N/A</td> <td>1</td> <td>1</td> <td>0.27</td> <td>0.44</td> </tr> <tr> <td>Neck Tension</td> <td>N</td> <td>4170</td> <td>2620</td> <td>1570</td> <td>998</td> </tr> <tr> <td>Neck Compression</td> <td>N</td> <td>4000</td> <td>2520</td> <td>147</td> <td>413</td> </tr> <tr> <td>Left Femur Force</td> <td>N</td> <td>10008</td> <td>6805</td> <td>3339</td> <td>2654</td> </tr> <tr> <td>Right Femur Force</td> <td>N</td> <td>10008</td> <td>6805</td> <td>1799</td> <td>1539</td> </tr> </tbody> </table>				Measurement Description	Units	Threshold		Driver ATD	Passenger ATD	50 th	5 th	Head Injury Criteria (HIC ₁₅)	N/A	700	700	254	306	Maximum Chest Compression	mm	63	52	25	11	Nij	N/A	1	1	0.27	0.44	Neck Tension	N	4170	2620	1570	998	Neck Compression	N	4000	2520	147	413	Left Femur Force	N	10008	6805	3339	2654	Right Femur Force	N	10008	6805	1799	1539
Measurement Description	Units	Threshold				Driver ATD	Passenger ATD																																														
		50 th	5 th																																																		
Head Injury Criteria (HIC ₁₅)	N/A	700	700	254	306																																																
Maximum Chest Compression	mm	63	52	25	11																																																
Nij	N/A	1	1	0.27	0.44																																																
Neck Tension	N	4170	2620	1570	998																																																
Neck Compression	N	4000	2520	147	413																																																
Left Femur Force	N	10008	6805	3339	2654																																																
Right Femur Force	N	10008	6805	1799	1539																																																
17. Key Words 35 mph Frontal Barrier Impact Test New Car Assessment Program (NCAP)		18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division, NPO-411 1200 New Jersey Ave, SE, Room E12-100 Washington, DC 20590 Email: tis@nhtsa.dot.gov FAX: 202-493-2833																																																			
19. Security Classification of Report Unclassified	20. Security Classification of Page Unclassified	21. No. of Pages 162	22. Price																																																		

TABLE OF CONTENTS

<u>Section</u>		<u>Page No.</u>
1	Purpose and Summary of Test	1
2	Occupant and Vehicle Information / Data Sheets	3

<u>Data Sheet No.</u>		<u>Page No.</u>
1	General Test and Vehicle Parameter Data	4
2	Seat Adjustment, Fuel System, and Steering Wheel Data	8
3	Dummy Longitudinal Clearance Dimensions	10
4	Dummy Lateral Clearance Dimensions	11
5	Seat Belt Positioning Data	12
6	High-Speed Camera Locations and Data	13
7	Vehicle Accelerometer Data	15
8	Photographic Reference Target Locations	16
9	Load Cell Locations on Fixed Barrier	17
10	Test Vehicle Summary of Results	18
11	Post-Test Observations	19
12	Vehicle Profile Measurements	20
13	Accident Investigation Division Data	22
14	Vehicle Intrusion Measurements	23
15	Summary of FMVSS 212, 219 (Partial), and 301 Data	26
16	FMVSS 301 Static Rollover Results	28
17	Dummy/Vehicle Temperature Stabilization Data	29

<u>Appendix</u>		
A	Photographs	A
B	Dummy Response Data Traces	B
C	Dummy Calibration and Performance Verification Data	C

SECTION 1 PURPOSE AND SUMMARY OF TEST

PURPOSE

This 56.3 km/h frontal barrier impact test is part of the Vehicle Barrier Impact Testing Program sponsored by the National Highway Traffic Safety Administration (NHTSA) under contract number DTNH22-06-D-00028. The purpose of this test was to obtain vehicle crashworthiness and occupant restraint system performance data for consumer information purposes.

The 56.3 km/h frontal barrier impact was conducted in accordance with the Office of Crashworthiness Standards Frontal NCAP Laboratory Test Procedure.

SUMMARY

A load cell barrier was impacted by a 2012 Ram 1500 ST Quad Cab 4x4 at a velocity of 56.2 kph. The test was performed at MGA Research Corporation on November 22, 2011. Pre-and post-test photographs of the vehicle and dummies can be found in Appendix A.

Two real-time cameras and fourteen (14) high-speed cameras were used to document the frontal barrier impact event. Camera locations and other pertinent camera information can be found in this report.

One Part 572E, 50th percentile male anthropomorphic test device (ATD), was placed in the driver seating position and one Part 572O 5th percentile female test device (ATD) was placed in the right-front passenger seating position according to dummy placement instructions specified in the Frontal NCAP Laboratory Test Procedure.

Both ATDs were fully instrumented with head, chest and pelvis tri-axial accelerometers, chest displacement potentiometers, upper neck transducers, right/left femur load cells, and lower leg instrumentation. Seat belt load cells were also on the driver and passenger's lap and shoulder belts to measure dummy torso and pelvic section loading.

The driver (position 1) ATD (Serial No. 351) and the right-front passenger (position 2) ATD (Serial No. 634) were calibrated previous to this test. Certification details, along with instrumentation calibration data, are found in Appendix C of this report.

The 228 channels of data were recorded on an on-board data acquisition system. Appendix B contains the dummy head, chest displacement, neck, and femur response data traces.

There was 100 percent windshield retention and no intrusion into the protected zone of the windshield during the event. There was no Stoddard Solvent leakage after the event or during any phase of the static rollover.

The maximum static crush of the vehicle was 395 mm and both the driver and passenger side doors remained closed during the impact event and were operable after the impact.

The driver's visible contact points were as follows: The driver's head and chest contacted the airbag. The driver's head also contacted the headrest. The driver's knees contacted the knee bolster. The passenger's visible contact points were as follows: The passenger's head and chest contacted the airbag. The passenger's head also contacted the headrest. The passenger's knees contacted the glovebox.

The occupant data is summarized below:

ATD position	HIC ₁₅	Nij	Neck Tension (N)	Neck Comp. (N)	3ms Chest Clip (Gs)	Chest Disp. (mm)	Left Femur (N)	Right Femur (N)
Driver (50 th)	254	0.27	1570	147	35	25	3339	1799
Passenger (5 th)	306	0.44	998	413	41	11	2654	1539

The test data can be found on the NHTSA website at www.nhtsa.dot.gov.

TEST NOTES

There was no valid data collected for:

- Driver Lap Belt after 124 msec. and questionable from 41-59 msec.
- Passenger Left Ankle X is questionable from 138-167 msec.
- Passenger Left Ankle Z is questionable from 138-160 msec.
- Passenger Left Foot Z - Front is questionable from 138-168 msec.
- Passenger Right Ankle X is questionable from 159-179 msec.
- Passenger Right Ankle Z is questionable from 161-180 msec.
- Load Cell 5-1 is questionable from 15-52 msec.

MGA does not endorse or certify products. The manufacturer's name appears solely for identification purposes.

SECTION 2
OCCUPANT AND VEHICLE INFORMATION / DATA SHEETS

**DATA SHEET NO. 1
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
 Test Date: 11/22/2011

TEST VEHICLE INFORMATION AND OPTIONS

NHTSA No.	MC0303	Traction Control System (TCS)	Yes
Model Year	2012	Auto-Leveling System	No
Make	Ram	Automatic Door Locks (ADLs)	Yes
Model	1500 Quad	Power Window Auto-Reverse	No
Body Style	4x4	Other Optional Feature	N/A
VIN	1C6RD7FTXCS144581	Driver Front Airbag	Yes
Body Color	Mineral Gray Metallic	Driver Curtain Airbag	Yes
Odometer (km/mi)	101 / 63	Driver Head/Torso Airbag	No
Engine Displacement (L)	5.7	Driver Torso Airbag	No
Type/No. Cylinders	8	Driver Torso/Pelvis Airbag	No
Engine Placement	Longitudinal	Driver Pelvis Airbag	No
Transmission Type	Automatic	Driver Knee Airbag	No
Transmission Speeds	6	Pass. Curtain Airbag	Yes
Overdrive	Yes	Pass. Head/Torso Airbag	No
Final Drive	Rear	Pass. Torso Airbag	No
Roof Rack	No	Pass. Torso/Pelvis Airbag	No
Sunroof/T-Top	No	Pass. Pelvis Airbag	No
Running Boards	No	Driver Seat Belt Pretensioner	Yes
Tilt Steering Wheel	Yes	Pass. Seat Belt Pretensioner	Yes
Power Seats	No	Driver Load Limiter	Yes
Anti-Lock Brakes (ABS)	Yes	Pass. Load Limiter	Yes
All-Wheel Drive (AWD)	4WD	Other Safety Restraint	N/A
Does owner's manual provide instructions to turn off automatic door locks?			No

DATA FROM CERTIFICATION LABEL

Manufactured By	Chrysler Group LLC	GVWR (kg)	3040
Date of Manufacture	9-11	GAWR Front (kg)	1770
Vehicle Type	Truck	GAWR Rear (kg)	1770


VEHICLE SEATING AND WEIGHT CAPACITY DATA

Measured Parameter	Front	Rear	Third	Total
Type of Seats	Bucket	Bench		
Designated Seating Capacity (DSC)	3	3		6
Capacity Weight (VCW) (kg)				610
Cargo Weight (RCLW) (kg)				202

**DATA SHEET NO. 1 (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
Test Date: 11/22/2011

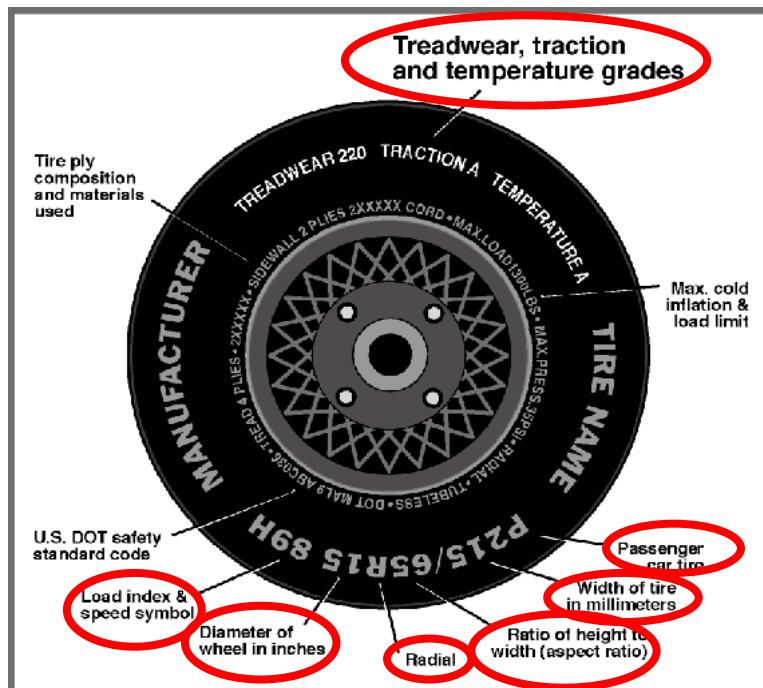

TIRE PLACARD INFORMATION

Measured Parameter	Front	Rear
Recommended Cold Tire Pressure (kPa)	240	240
Recommended Tire Size	P275/60R20	P275/60R20

TIRE SIDEWALL INFORMATION

Measured Parameter	Front	Rear
Max. Tire Pressure (kPa)	300	300
Tire Size on Vehicle	P275/60R20	P275/60R20
Tire Manufacturer	Goodyear	Goodyear
Tire Name	Wrangler HP	Wrangler HP
Tire Type	Passenger	Passenger
Tire Width	275	275
Aspect Ratio	60	60
Radial	Yes	Yes
Wheel Diameter	20	20
Load Index/Speed Symbol	114S	114S
Treadwear	340	340
Traction Grade	A	A
Temperature Grade	B	B
Tire Material	Rubber	Rubber

**DATA SHEET NO. 1 (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
Test Date: 11/22/2011

TEST VEHICLE WEIGHTS

	Units	As Delivered (UVW)			As Tested (ATW)		
		Front	Rear	Total	Front	Rear	Total
Left	kg	685.8	542.0		725.3	648.2	
Right	kg	711.3	484.0		704.0	615.1	
Ratio	%	57.7	42.3		53.1	46.9	
Totals	kg	1397.1	1026.0	2423.1	1429.3	1263.3	2692.6

TARGET TEST WEIGHT CALCULATION

Measured Parameter	Units	Value
Total Delivered Weight (UVW)	kg	2423.1
Weight of 1 P572E ATD & 1 P572O ATD	kg	140.6
Rated Cargo/Luggage Weight (RCLW)	kg	136
Calculated Vehicle Target Weight (TVTW)	kg	2699.7

TEST VEHICLE ATTITUDES AND CG

	Units	LF	RF	LR	RR	CG (aft of front axle)
As Delivered	mm	927	930	1005	1002	1510
As Tested	mm	930	927	972	974	1673
Post Test	mm	911	887	980	970	

GENERAL TEST VEHICLE DATA

Measurement Description	Units	Value
Total Vehicle Wheel Base	mm	3566
Total Vehicle Length at Left Side	mm	5725
Total Vehicle Length at Centerline	mm	5825
Total Vehicle Length at Right Side	mm	5725
Weight of Ballast in Cargo Area	kg	102.1
Weight of Vehicle Components Removed	kg	0.0
Amount of Stoddard Solvent in Fuel Tank	L	91.5

List of components removed: None

DATA SHEET NO. 1 (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
 Test Date: 11/22/2011

TARGET VEHICLE STRUCTURAL MEASUREMENT

	Elements	Pre-Test (mm)
1	Total Length	5825
2	Total Width	2020
3	Bumper Top Height	691
4	Bumper Bottom Height	525
5	Longitudinal Member Top Height	646
6	Distance between Longitudinal Members	790
7	Longitudinal Member Width	75
8	Engine Top Height	1100
9	Engine Bottom Height	351
10	Engine and Gearbox Width	1334
11	Front Bumper-Engine Distance	600
12	Front Shock Absorber Fixing Height	770
13	Bonnet Leading Edge Height	1184
14	Front Shock Absorber Fixing Width	1085
15	Front Bumper – Front Axle Distance	1013
16	Front Axle – A-Pillar Distance	564
17	A-Pillar – B-Pillar Distance	1115
18	B-Pillar – Rear Axle Distance	1186
19	B-Pillar – C-Pillar Distance	745
20	Roof Sill Bottom Height	1710
21	Roof Sill Top Height	1881
22	Floor Sill Bottom Height	370
23	Floor Sill Top Height	548


**DATA SHEET NO. 2
SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA**

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
 Test Date: 11/22/2011

NOMINAL DESIGN RIDING POSITION

The driver seat back is positioned as close as possible to the manufacturer's design angle. For the passenger seat back, seat back is adjusted following Appendix F, "Driver & Passenger Dummy Seating & Positioning Procedures" in the NCAP Test Procedure dated January 2010.

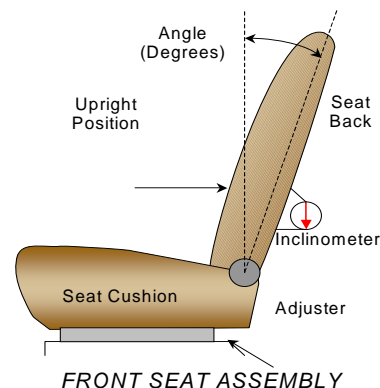

SEAT BACK ANGLE	Degrees
Driver Seat Back Angle	5.1° on headrest post
Passenger Seat Back Angle	-2.0° on headrest post

SEAT FORE/AFT POSITIONS


The driver and passenger seat fore/aft positions are adjusted following Appendix F, "Driver & Passenger Dummy Seating & Positioning Procedures" in the NCAP Test Procedure dated January 2010.

	Total Fore/Aft Travel	Placed in Position #
Driver Seat	24 detents	12 th detent (forward-most as 0)
Passenger Seat	23 detents	0 detent (forward-most as 0)

SEAT BELT UPPER ANCHORAGES

The seat belt upper anchorages are positioning following the manufacturer's specified position as listed in Form 1.

	Total # of Positions	Placed in Position #
Driver Seat	5 (1 st as 1)	0 (uppermost as 0)
Passenger Seat	5 (1 st as 1)	0 (uppermost as 0)

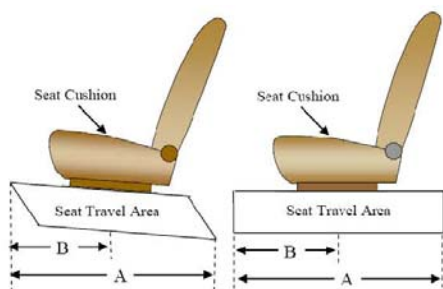

DATA SHEET NO. 2 (CONTINUED)
SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
 Test Date: 11/22/2011


FUEL TANK CAPACITY DATA

	Liters
Usable Capacity of "Standard Tank"	98.4
Usable Capacity of "Optional Tank"	
92-94% of Usable Capacity	90.5 to 92.5
Actual Amount of Solvent used	91.5
1/3 of Usable Capacity	32.8

FUEL PUMP


Describe the fuel pump type, its behavior, and the location of the fuel filler pipe.

The vehicle is equipped with an electric fuel pump. The pump starts pumping fuel when the Ignition key is in and turned to the run position. The fuel pipe is on the left side.

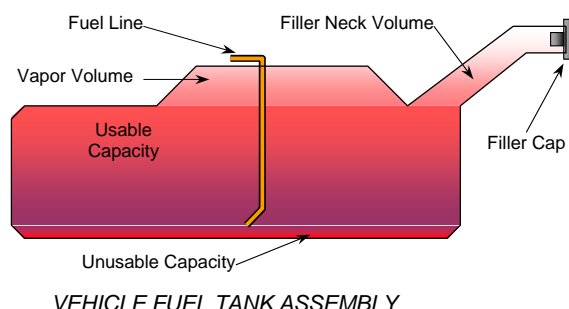

STEERING COLUMN ADJUSTMENT

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes when moved through its full range of motion. An aluminum plate is placed across the rim of the steering wheel, an inclinometer is placed on the plate and the angle is measured.

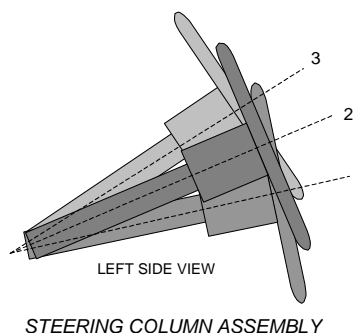


STEERING COLUMN POSITION

	Degrees	Fore/Aft Position (mm)
Lowermost – Position 1	75.2	
Geometric Center – Position 2	66.7	
Uppermost – Position 3	58.2	
Telescoping Steering Wheel Travel		
Test Position	67.7	

**DATA SHEET NO. 3
DUMMY LONGITUDINAL CLEARANCE DIMENSIONS**

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
 Test Date: 11/22/2011

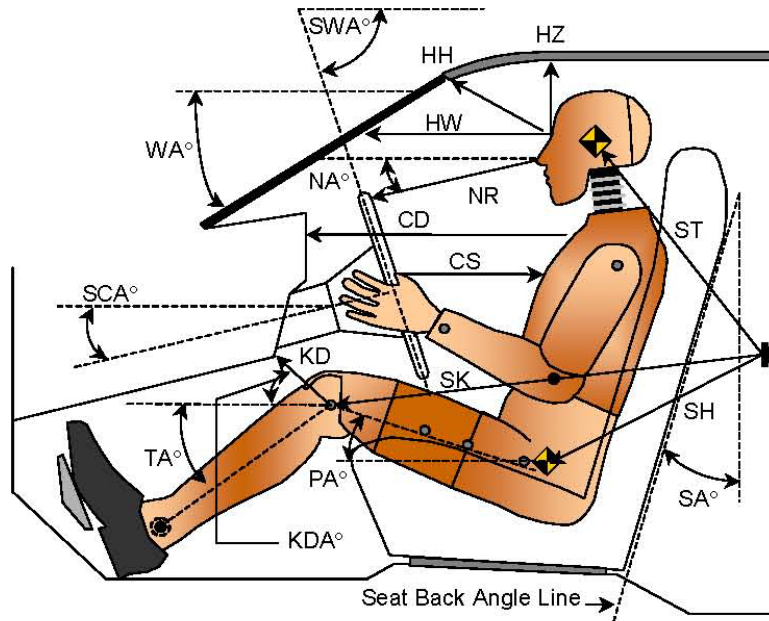


LEFT SIDE VIEW

Code	Measurement Description	Driver S/N 351		Passenger S/N 634	
		Length (mm)	Angle (°)	Length (mm)	Angle (°)
WA°	Windshield Angle		31.9		
SWA°	Steering Wheel Angle		67.7		
SCA°	Steering Column Angle		22.3		
SA°	Seat Back Angle (on headrest post)		5.1		-2.0
HZ	Head to Roof (Z)	242	90	252	90
HH	Head to Header	453	20.8	368	38.5
HW	Head to Windshield	712	0	690	0
NR	Nose to Rim	428	15.2		
CD	Chest to Dash	588		440	
CS	Chest to Steering Hub	352	11.4		
RA	Rim to Abdomen	212	0		
KDL	Left Knee to Dash	157	17.6	62	22.7
KDR	Right Knee to Dash	128	13.7	79	29.1
PA°	Pelvic Angle		23.1		20.1
TA°	Tibia Angle		54.3		62.3
SK	Striker to Knee	583	78.3	677	87.5
ST	Striker to Head	661	1.5	583	25.0
SH	Striker to H-Point	182	90.5	390	85.6

**DATA SHEET NO. 4
DUMMY LATERAL CLEARANCE DIMENSIONS**

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
 Test Date: 11/22/2011

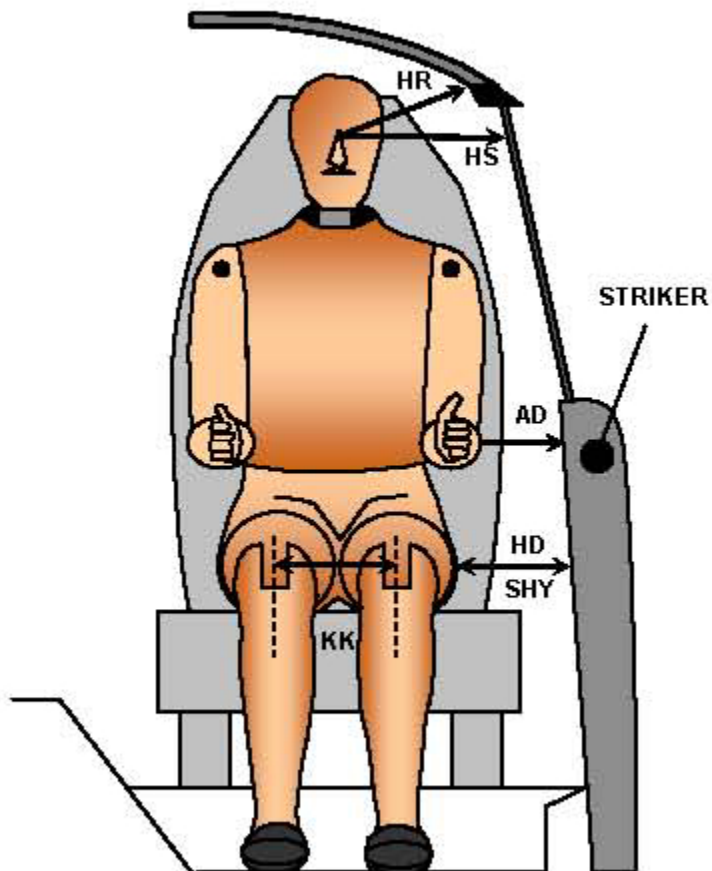


FRONT VIEW OF DUMMY

Code	Measurement Description	Driver S/N 351	Passenger S/N 634
		Length (mm)	
AD	Arm to Door	126	90
HD	H-Point to Door	147	176
HR	Head to Side Header	200	254
HS	Head to Side Window	309	353
KK	Knee to Knee	310	222
SHY	Striker to H-Point (Y Direction)	270	306
AA	Ankle to Ankle	295	153

**DATA SHEET NO. 5
SEAT BELT POSITIONING DATA**

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
 Test Date: 11/22/2011

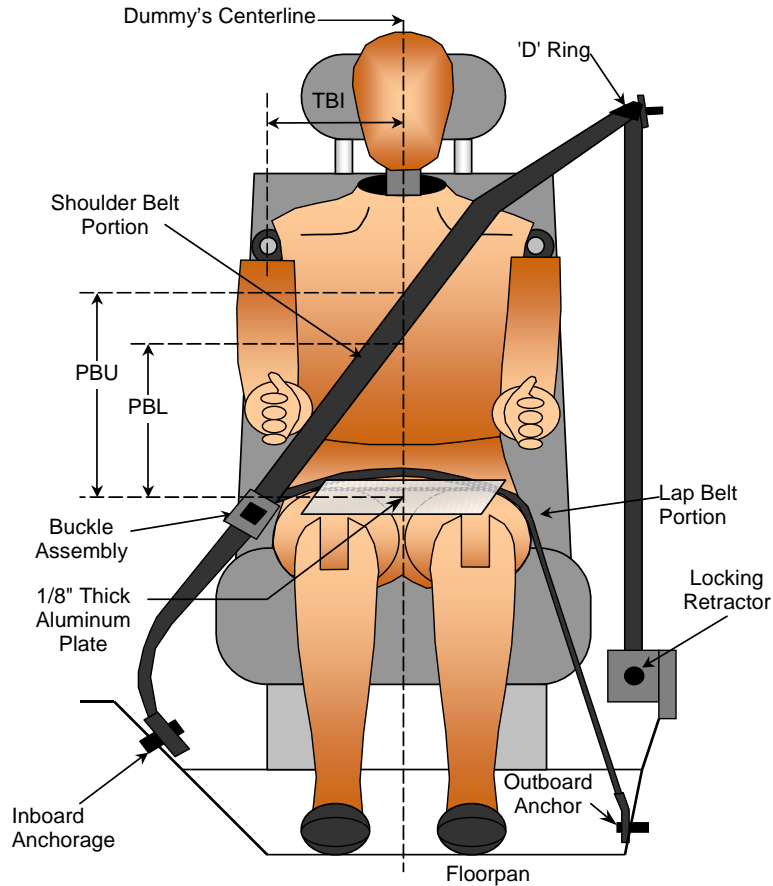

FRONT VIEW OF DUMMY

SEAT BELT POSITIONING MEASUREMENTS

Measurement Description	Units	Driver	Passenger
PBU - Top surface of reference to belt upper edge	mm	385	330
PBL - Top surface of reference to belt lower edge	mm	310	230

BELT LENGTH DATA


Measurement Description	Units	Driver	Passenger
Shoulder Belt Length as measured on ATD	mm	828	915
Lap Belt Length as measured on ATD	mm	870	925
Remainder of belt on reel	mm	1832	960
Total Belt Length for Continuous Webbing Systems	mm	3530	2800

**DATA SHEET NO. 6
HIGH-SPEED CAMERA LOCATIONS AND DATA**

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
Test Date: 11/22/2011

CAMERA POSITIONS FOR FRONTAL IMPACTS

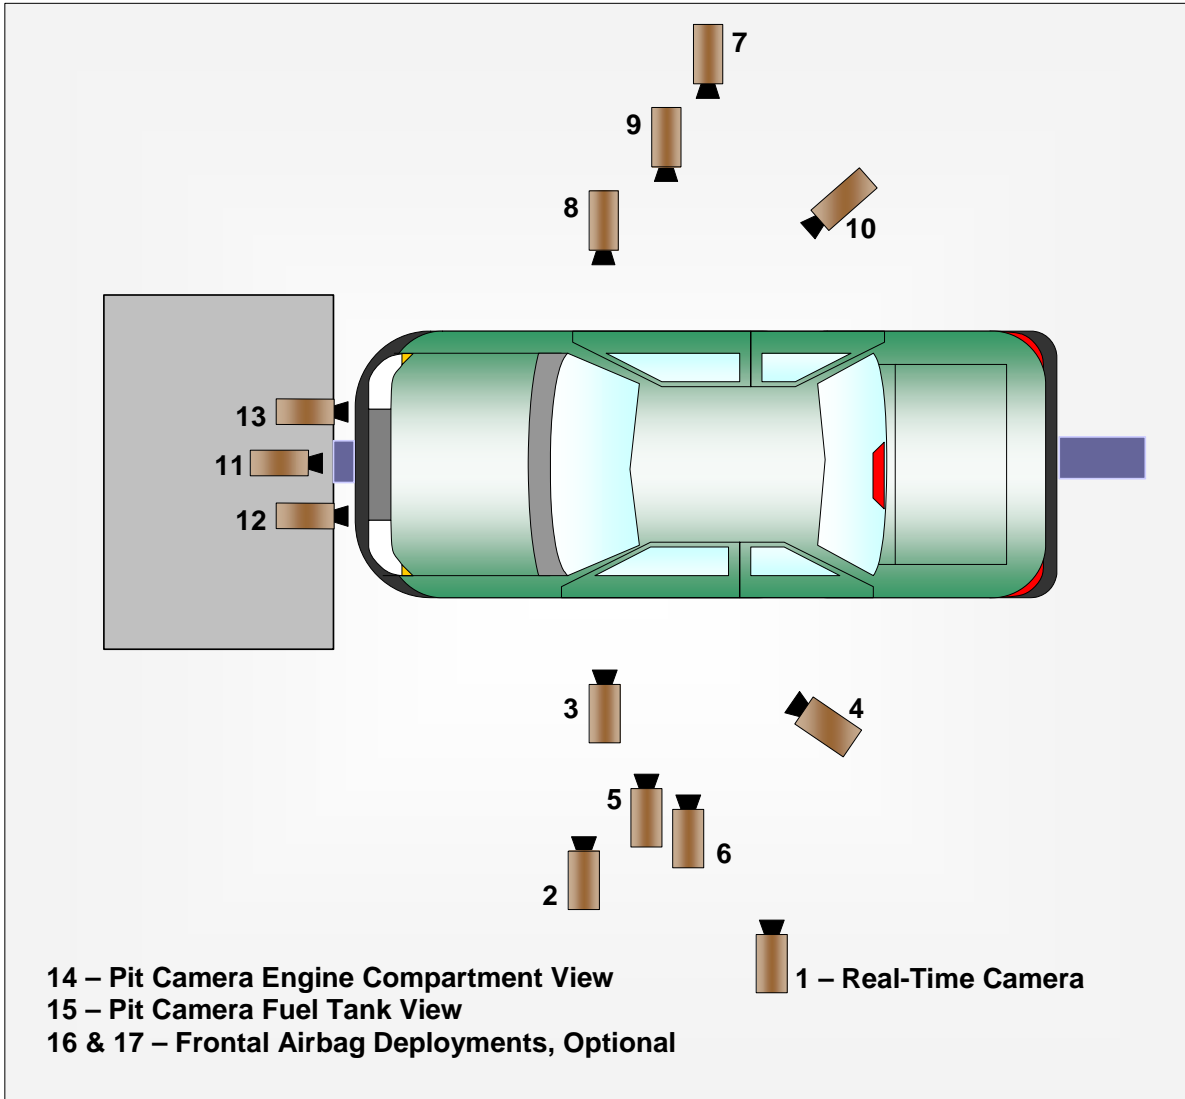

**DATA SHEET NO. 6 (CONTINUED)
CAMERA LOCATIONS AND DATA**

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
Test Date: 11/22/2011

CAMERA LOCATIONS

No.	Camera View	Coordinates (mm)			Lens (mm)	Speed (fps)
		X*	Y*	Z*		
1	Real-Time Left Overall					30
2	Driver Close-Up	1810	-6680	-1820	35	1000
3	Left Front Half	1410	-5640	-1050	24	1000
4	Left Angle	6420	-4770	-1970	50	1000
5	Steering Column - Top	530	-5410	-1230	24	1000
6	Steering Column - Bottom	510	-5430	-820	24	1000
7	Right Overall	2580	7120	-1070	20	1000
8	Passenger Close-Up	1780	6560	-1820	35	1000
9	Right Front Half	1390	5540	-1030	24	1000
10	Right Angle	5600	4910	-1970	50	1000
11	Windshield	-320	0	-2860	20	1000
12	Driver Windshield	-30	-360	-2040	12.5	1000
13	Passenger Windshield	-30	360	-2040	12.5	1000
14	Pit Front	970	0	3150	24	1000
15	Pit Rear	2930	0	3150	24	1000
16	Onboard Driver Side (optional)					
17	Onboard Passenger Side (optional)					
18	Real-Time Pan View					30

***COORDINATES:**


- +X = forward of impact plane
- +Y = right of monorail centerline
- +Z = below ground level

Cameras 16 & 17 were not used for this test.

**DATA SHEET NO. 7
VEHICLE ACCELEROMETER DATA**

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
 Test Date: 11/22/2011

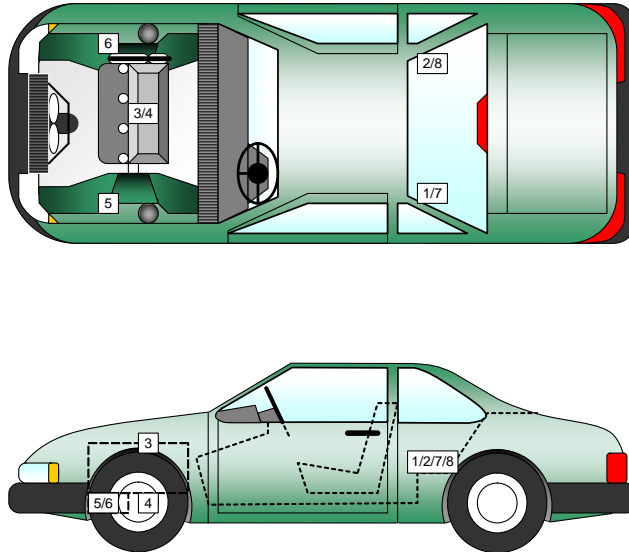

VEHICLE ACCELEROMETER PRE-TEST LOCATIONS

No.	Accelerometer Location	Measurements (mm)		
		X	Y	Z
1	Left Rear Accelerometer – X Direction	2844	-450	-638
2	Right Rear Accelerometer – X Direction	2844	450	-638
3	Engine Top X	4880	55	-1100
4	Engine Bottom X	4644	-45	-380
5	Left Brake Caliper X	4623	-735	-325
6	Right Brake Caliper X	4623	735	-325
7	Left Rear Accelerometer Redundant – X Direction	2844	-450	-638
8	Right Rear Accelerometer Redundant – X Direction	2844	450	-638




Reference Points: X - Rear Surface of Vehicle (+ forward)
 Y - Vehicle Centerline (+ to right)
 Z - Ground Plane (+ down)

DATA SHEET NO. 8
PHOTOGRAPHIC REFERENCE TARGET LOCATIONS

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
 Test Date: 11/22/2011

Item	Value (mm)
A	490
B	1010
C	2560
D	670
E	2595
F	115
G	
H	2331
I	1614
J	934
K	934
L	2343
M	2331
N	2343
O	934
P	934
Q	1614

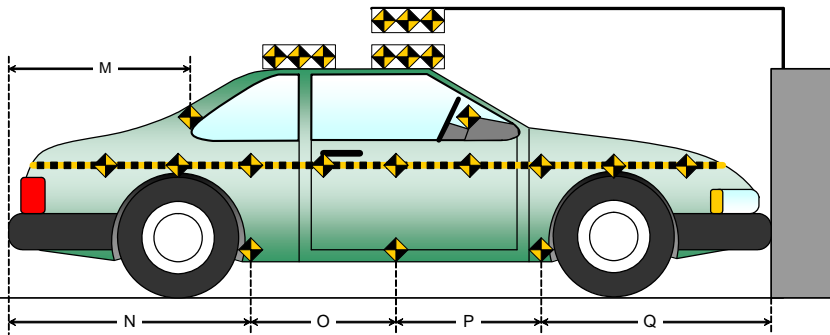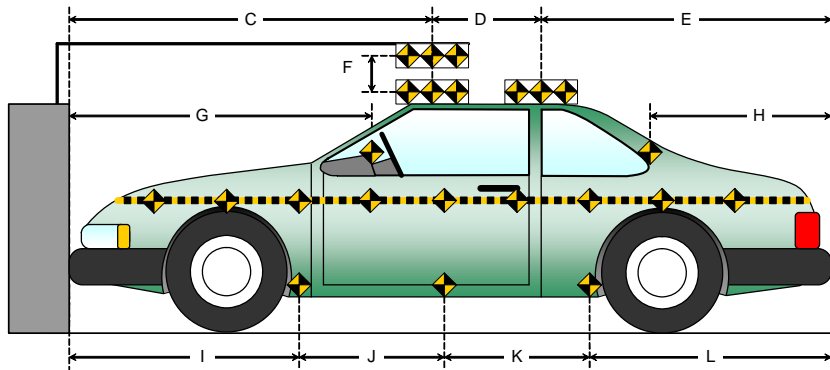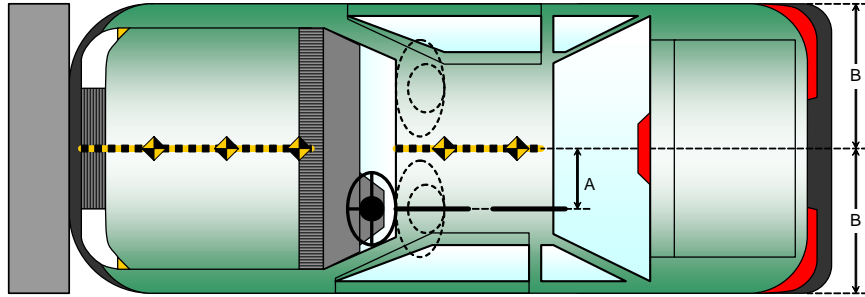

DATA SHEET NO. 9
LOAD CELL LOCATIONS ON FIXED BARRIER

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
Test Date: 11/22/2011

Advanced Research Load Cell Barrier



1-1	1-2	1-3	1-4	1-5	1-6	1-7	1-8	1-9	1-10	1-11	1-12	1-13	1-14	1-15	1-16
2-1	2-2	2-3	2-4	2-5	2-6	2-7	2-8	2-9	2-10	2-11	2-12	2-13	2-14	2-15	2-16
3-1	3-2	3-3	3-4	3-5	3-6	3-7	3-8	3-9	3-10	3-11	3-12	3-13	3-14	3-15	3-16
4-1	4-2	4-3	4-4	4-5	4-6	4-7	4-8	4-9	4-10	4-11	4-12	4-13	4-14	4-15	4-16
5-1	5-2	5-3	5-4	5-5	5-6	5-7	5-8	5-9	5-10	5-11	5-12	5-13	5-14	5-15	5-16
6-1	6-2	6-3	6-4	6-5	6-6	6-7	6-8	6-9	6-10	6-11	6-12	6-13	6-14	6-15	6-16
7-1	7-2	7-3	7-4	7-5	7-6	7-7	7-8	7-9	7-10	7-11	7-12	7-13	7-14	7-15	7-16
8-1	8-2	8-3	8-4	8-5	8-6	8-7	8-8	8-9	8-10	8-11	8-12	8-13	8-14	8-15	8-16
9-1	9-2	9-3	9-4	9-5	9-6	9-7	9-8	9-9	9-10	9-11	9-12	9-13	9-14	9-15	9-16
10-1	10-2	10-3	10-4	10-5	10-6	10-7	10-8	10-9	10-10	10-11	10-12	10-13	10-14	10-15	10-16
11-1	11-2	11-3	11-4	11-5	11-6	11-7	11-8	11-9	11-10	11-11	11-12	11-13	11-14	11-15	11-16

Load Cells are 121 mm x 121 mm with a 7 mm gap in between each load cell.

DATA SHEET NO. 10
TEST VEHICLE SUMMARY OF RESULTS

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
Test Date: 11/22/2011

INSTRUMENTATION

Driver Dummy Data Channels	46
Passenger Dummy Data Channels	46
Vehicle Structure Accelerometers	8
Barrier Channels	128
Total	228

CAMERA COVERAGE

High-Speed Vehicle Onboard	0
High-Speed Offboard	14
Real-Time	2
Total	16

**DATA SHEET NO. 11
POST-TEST OBSERVATIONS**

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
 Test Date: 11/22/2011

TEST DUMMY INFORMATION AND CONTACT LOCATIONS

Description	Driver	Passenger
Dummy Type / Serial No.	HIII 50% / 351	HIII 5% / 634
Head Contact	Airbag, Headrest	Airbag, Headrest
Upper Torso Contact	Airbag	Airbag
Lower Torso Contact	None	None
Left Knee Contact	Knee Bolster	Glovebox
Right Knee Contact	Knee Bolster	Glovebox

DOOR OPENING AND SEAT TRACK INFORMATION

Description	Driver	Passenger
Locked/Unlocked Doors	Doors were locked	Doors were locked
Front Door Opening	Door remained closed and latched; Door opened without tools	Door remained closed and latched; Door opened without tools
Rear Door Opening	Door remained closed and latched; Door opened without tools	Door remained closed and latched; Door opened without tools
Seat Track Shift (mm)	0	0
Seat Back Failure	None	None

POST TEST STRUCTURAL OBSERVATIONS

Critical Areas of Performance	Observations and Conclusions
Windshield Damage	None
Window Damage	None
Other Notable Effects	None

VEHICLE REBOUND FROM BARRIER

Measured Parameter	Units	Value
Left Side	mm	3020
Center	mm	3020
Right Side	mm	3030
Average	mm	3023


SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION

Restraint Type	Left Front (Driver) P1		Right Front (Passenger)	
	Mounted	Deployed	Mounted	Deployed
Frontal Airbag	Yes	Yes	Yes	Yes
Knee Airbag	No		No	
Curtain Side Airbag	Yes	No	Yes	No
Torso Side Airbag	No		No	
Seat Belt Pretensioner	Yes	Yes	Yes	Yes
Seat Belt Load Limiter	Yes		Yes	

DATA SHEET NO. 12 VEHICLE PROFILE MEASUREMENTS

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
 Test Date: 11/22/2011

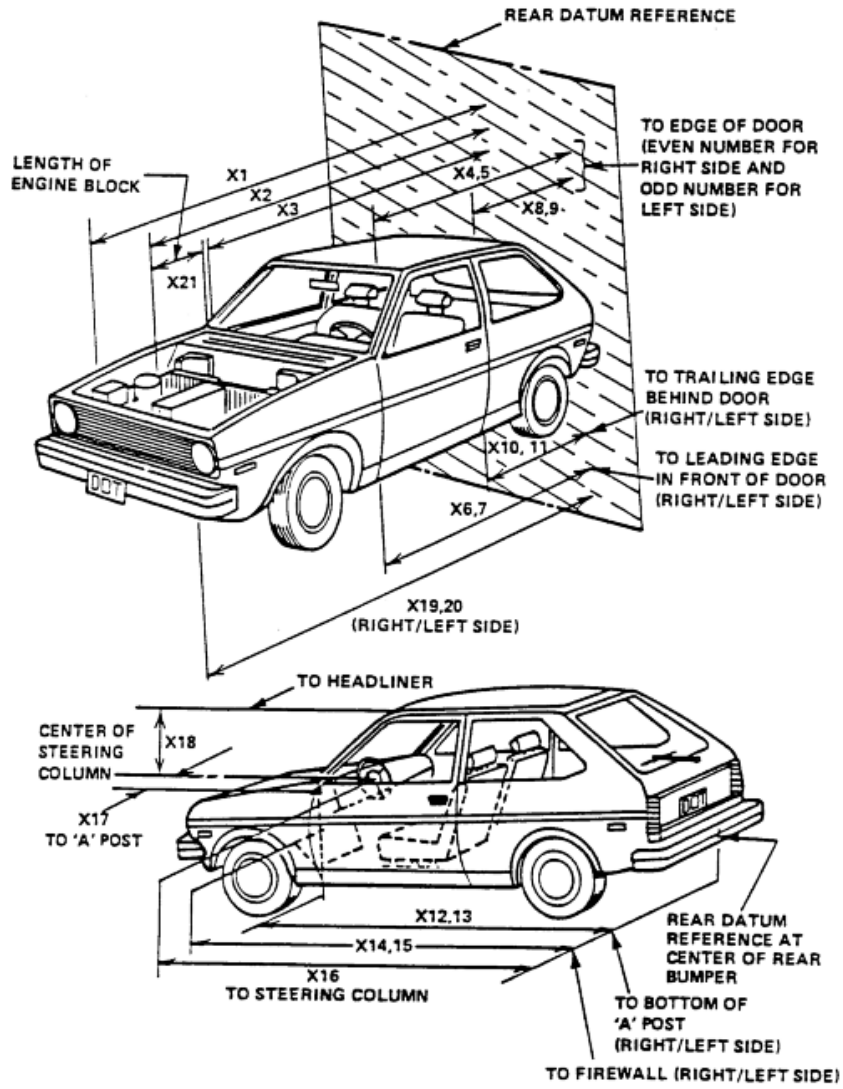

DATA SHEET NO. 12 (CONTINUED)
VEHICLE PROFILE MEASUREMENTS

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
 Test Date: 11/22/2011

RSOV (Rear Surface of Vehicle)

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
1	Total Length of Vehicle at Centerline	mm	5825	5430	395
2	RSOV to Front of Engine	mm	5062	4975	87
3	RSOV to Firewall	mm	4656	4650	6
4	RSOV to Upper Leading Edge of Right Door	mm	4230	4228	2
5	RSOV to Upper Leading Edge of Left Door	mm	4230	4230	0
6	RSOV to Lower Leading Edge of Right Door	mm	4165	4160	5
7	RSOV to Lower Leading Edge of Left Door	mm	4165	4162	3
8	RSOV to Upper Trailing Edge of Right Door	mm	3105	3105	0
9	RSOV to Upper Trailing Edge of Left Door	mm	3105	3105	0
10	RSOV to Lower Trailing Edge of Right Door	mm	3093	3093	0
11	RSOV to Lower Trailing Edge of Left Door	mm	3093	3093	0
12	RSOV to Bottom of "A" Post of Right Side	mm	4182	4180	2
13	RSOV to Bottom of "A" Post of Left Side	mm	4182	4180	2
14	RSOV to Firewall, Right Side	mm	4640	4640	0
15	RSOV to Firewall, Left Side	mm	4640	4640	0
16	RSOV to Steering Column	mm	3717	3733	-16
17	Center of Steering Column to "A" Post	mm	332	332	0
18	Center of Steering Column to Headliner	mm	455	460	-5
19	RSOV to Right Side of Front Bumper	mm	5725	5383	342
20	RSOV to Left Side of Front Bumper	mm	5725	5378	347
21	Length of Engine Block	mm	602	602	0
RD	RSOV to Right Side of Dash Panel	mm	3950	3946	4
CD	RSOV to Center of Dash Panel	mm	3921	3921	0
LD	RSOV to Left Side of Dash Panel	mm	3935	3932	3

DATA SHEET NO. 13
ACCIDENT INVESTIGATION DIVISION DATA

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
Test Program: NCAP Frontal Barrier Impact Test


NHTSA No.: MC0303
Test Date: 11/22/2011

VEHICLE INFORMATION

VIN: 1C6RD7FTXCS144581 Wheelbase (mm): 3566
Vehicle Size Category: Truck Test Weight (kg): 2692.6

ACCELEROMETER DATA

Accelerometer Locations: As per measurements on Page 15
Cal. Procedure/Interval: MGA procedure / 6 month
Integration Algorithm: Trapezoidal Linearity: > 99%
Impact Velocity (km/h): 56.2
Velocity Change (km/h): 61.3
Time of Separation (msec): 107.1

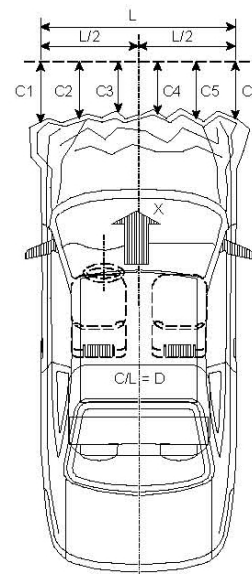

CRUSH PROFILE

Collision Deformation Classification: Frontal
Midpoint of Damage: Centerline
Damage Region Length (mm): 1308
Impact Mode: Frontal

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
C1	Crush zone 1 at left side	mm	5725	5378	347
C2	Crush zone 2 at left side	mm	5775	5410	365
C3	Crush zone 3 at left side	mm	5799	5425	374
C4	Crush zone 4 at right side	mm	5799	5432	367
C5	Crush zone 5 at right side	mm	5775	5420	355
C6	Crush zone 6 at right side	mm	5725	5383	342
L	C1 TO C6	mm	1308	1303	5

**DATA SHEET NO. 14
VEHICLE INTRUSION MEASUREMENTS**

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
 Test Program: NCAP Frontal Barrier Impact Test


NHTSA No.: MC0303
 Test Date: 11/22/2011

DOOR OPENING WIDTH

Item	Description	Units	Pre-Test	Post-Test	Difference
A	Left Side Upper	mm	975	975	0
B	Left Side Lower	mm	944	945	-1
D	Right Side Upper	mm	975	975	0
E	Right Side Lower	mm	944	944	0

WHEELBASE MEASUREMENTS

Item	Description	Units	Pre-Test	Post-Test	Difference
C	Left Side Wheelbase	mm	3566	3545	21
F	Right Side Wheelbase	mm	3566	3540	26

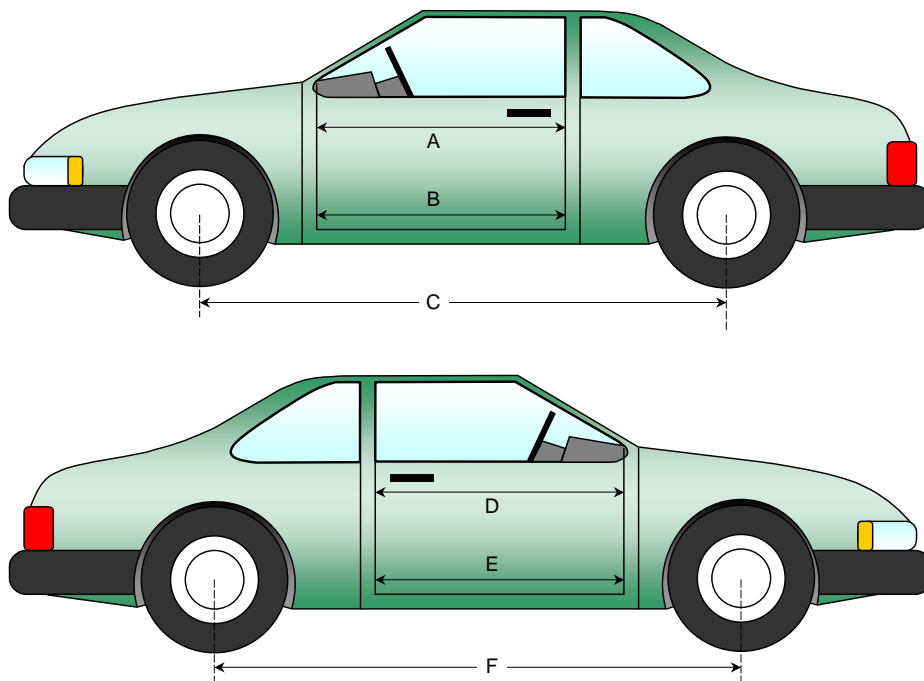

**DATA SHEET NO. 14 (CONTINUED)
VEHICLE INTRUSION MEASUREMENTS**


Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
Test Date: 11/22/2011

DRIVER COMPARTMENT INTRUSION

Item	Description	Units	Pre-Test	Post-Test	Difference
AB	Door Opening (Inside window jam)	mm	788	785	3
CX	Left Knee Bolster to X	mm	249	258	-9
DX	Right Knee Bolster to X	mm	250	220	30
EX	Brake Pedal to X	mm	508	505	3
FX	Foot Rest to X	mm	611	610	1
GX	Center of Steering Column Wheel Hub to X	mm	49	90	-41

X = Front of Seat Track (stationary)

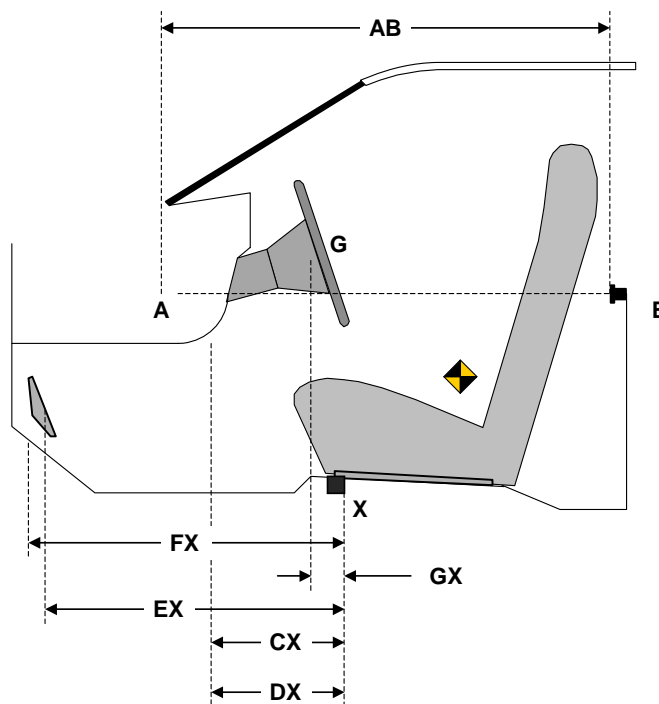


DRIVER COMPARTMENT

**DATA SHEET NO. 14 (CONTINUED)
VEHICLE INTRUSION MEASUREMENTS**

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
 Test Date: 11/22/2011

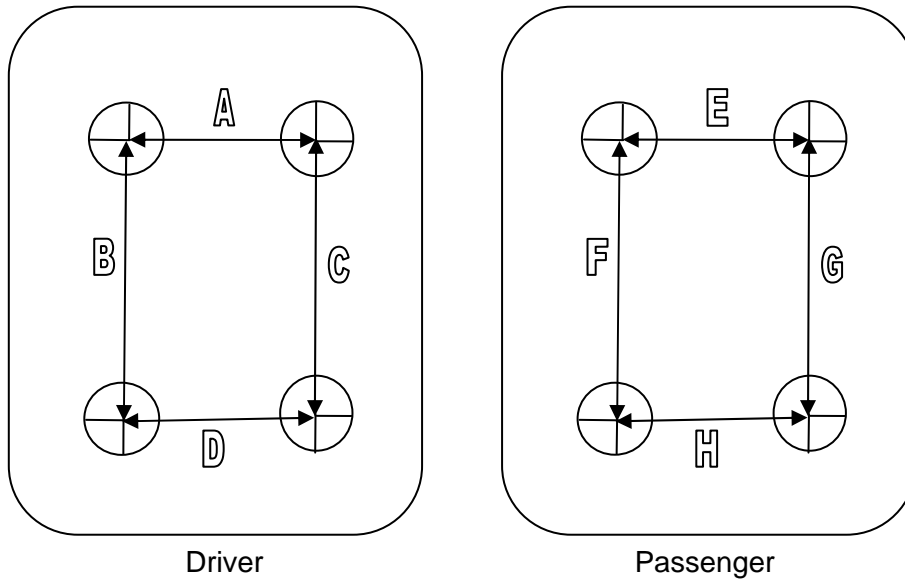

TOP VIEW THROUGH FLOOR PAN

UNDERBODY FLOORBOARD DEFORMATION

Measurement	Units	Pre-Test	Post-Test	Difference
A	mm	300	300	0
B	mm	300	300	0
C	mm	300	300	0
D	mm	300	300	0
E	mm	300	300	0
F	mm	250	250	0
G	mm	250	250	0
H	mm	300	300	0

DATA SHEET NO. 15
SUMMARY OF FMVSS 212, 219 (PARTIAL), AND 301 DATA

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
 Test Date: 11/22/2011

Windshield Mounting Details:


Windshield glass is secured to the vehicle frame with a rubber trim and glue.

The standard requires that the post-test retention measurement be a minimum of 75 percent of the pretest total periphery measurement for vehicles not equipped with occupant passive restraints and 50 percent for each side of the windshield for vehicles, which are equipped with occupant passive restraints.

Temperature of windshield molding during test: 21.7°C

WINDSHIELD PERIPHERY MEASUREMENTS

Measurement	Pre-Test (mm)	Post-Test (mm)	% of Retention
Left Side	2308	2308	100
Right Side	2308	2308	100
Total	4616	4616	100

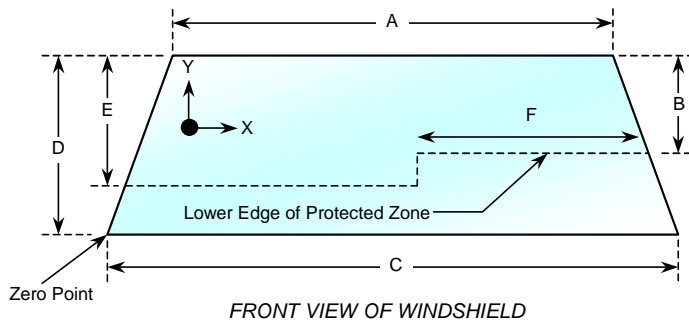

Item	Units	Value
A	mm	1402
B	mm	486
C	mm	1658
D	mm	778
E	mm	532
F	mm	618

AREA OF PROTECTED ZONE FAILURES - NONE

A. Provide coordinates of the area that the protected zone was penetrated more than 0.25 inches by a vehicle component other than one that is normally in contact with the windshield. **None**

X	Y

B. Provide coordinates of the area beneath the protected zone that the inner surface of the windshield was penetrated by a vehicle component. **None**

X	Y

DATA SHEET NO. 15 (CONTINUED)
SUMMARY OF FMVSS 212, 219 (PARTIAL), AND 301 DATA

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
Test Date: 11/22/2011

FMVSS 301 FUEL SYSTEM INTEGRITY POST IMPACT DATA

Test Time: 10:50 pm

Temperature: 21.7° C


- A. From impact until vehicle motion ceases: 0 oz.
(Maximum Allowable = 1 ounce)
- B. For the 5 minute period after motion ceases: None
(Maximum allowable = 5 ounces)
- C. For the following 25 minutes: None
(Maximum allowable = 1 oz./minute)
- D. Spillage Details: None

DATA SHEET NO. 16
FMVSS 301 STATIC ROLLOVER RESULTS

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
 Test Date: 11/22/2011

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.
2. The position hold time at each position is 300 seconds (minimum).
3. Details of Stoddard Solvent spillage: **None**

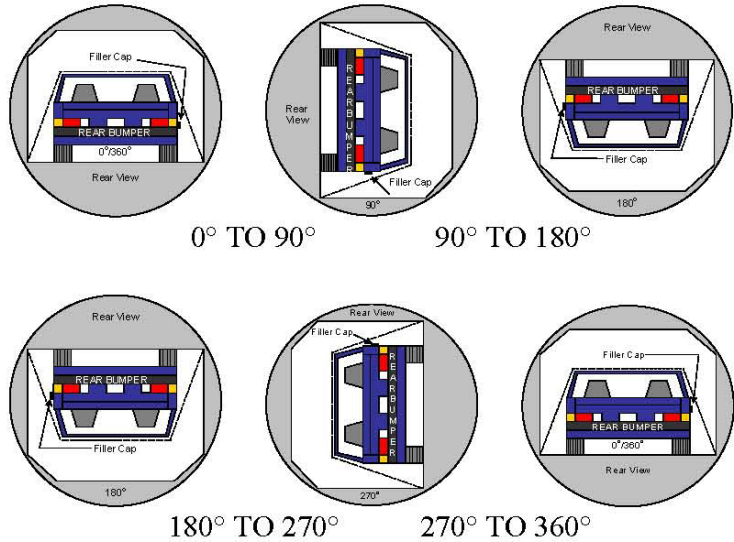

SOLVENT COLLECTION TIME TABLE IN SECONDS

Test Phase	Rotation Time	Hold Time	Total Time
0° to 90°	118	300	418
90° to 180°	115	300	415
180° to 270°	113	300	413
270° to 360°	113	300	413

FMVSS 301 ROLLOVER SPILLAGE TABLE (units in ounces)

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eight Minute
0° to 90°	0	0	0	0
90° to 180°	0	0	0	0
180° to 270°	0	0	0	0
270° to 360°	0	0	0	0


ROLLOVER SOLVENT SPILLAGE LOCATION TABLE

Test Phase	Spillage Location
0° to 90°	
90° to 180°	
180° to 270°	
270° to 360°	

DATA SHEET NO. 17
DUMMY/VEHICLE TEMPERATURE STABILIZATION DATA

Test Vehicle: 2012 Ram 1500 ST Quad Cab 4x4
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: MC0303
 Test Date: 11/22/2011

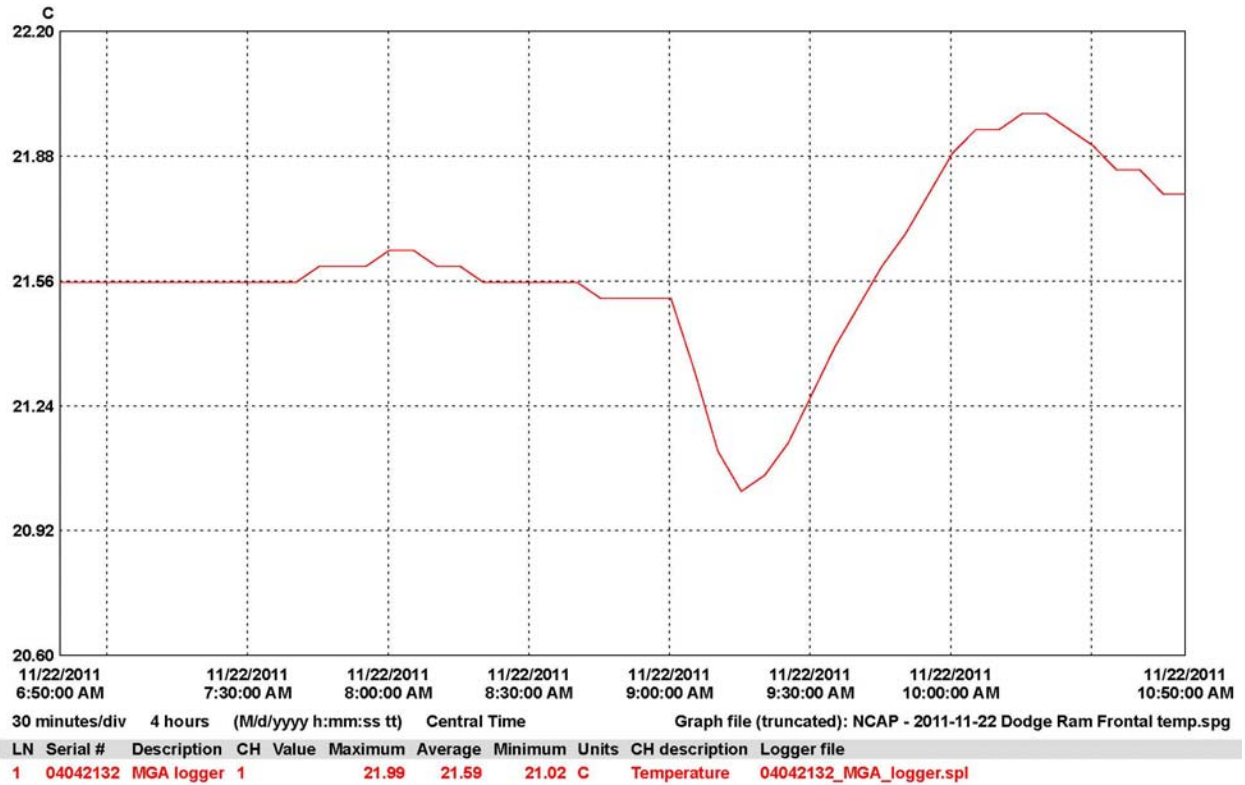


APPENDIX A
PHOTOGRAPHS

TABLE OF PHOTOGRAPHS

		<u>Page No.</u>
Photo No. 1.	Load Cell Location	A-1
Photo No. 2.	Load Cell Wall	A-1
Photo No. 3.	Manufacturer's Label	A-2
Photo No. 4.	Tire Placard	A-2
Photo No. 5.	2012 Ram Quad Cab 4x4 Frontal As Delivered	A-3
Photo No. 6.	Left Rear Three-Quarter View, As Received	A-3
Photo No. 7.	Pre-Test Front View of Test Vehicle	A-4
Photo No. 8.	Post-Test Front View of Test Vehicle	A-4
Photo No. 9.	Pre-Test Left View of Test Vehicle	A-5
Photo No. 10.	Post-Test Left View of Test Vehicle	A-5
Photo No. 11.	Pre-Test Right View of Test Vehicle	A-6
Photo No. 12.	Post-Test Right View of Test Vehicle	A-6
Photo No. 13.	Pre-Test Right Front Three-Quarter View	A-7
Photo No. 14.	Post-Test Right Front Three-Quarter View	A-7
Photo No. 15.	Pre-Test Left Rear Three-Quarter View	A-8
Photo No. 16.	Post-Test Left Rear Three-Quarter View	A-8
Photo No. 17.	Pre-Test Windshield View	A-9
Photo No. 18.	Post-Test Windshield View	A-9
Photo No. 19.	Pre-Test Engine Compartment View	A-10
Photo No. 20.	Post-Test Engine Compartment View	A-10
Photo No. 21.	Pre-Test Fuel Filler Cap View	A-11
Photo No. 22.	Post-Test Fuel Filler Cap View	A-11
Photo No. 23.	Pre-Test Front Underbody View	A-12
Photo No. 24.	Post-Test Front Underbody View	A-12
Photo No. 25.	Pre-Test Mid Front Underbody View	A-13
Photo No. 26.	Post-Test Mid Front Underbody View	A-13
Photo No. 27.	Pre-Test Mid Rear Underbody View	A-14

		<u>Page No.</u>
Photo No. 28.	Post-Test Mid Rear Underbody View	A-14
Photo No. 29.	Pre-Test Rear Underbody View	A-15
Photo No. 30.	Post-Test Rear Underbody View	A-15
Photo No. 31.	Pre-Test Dummy Cable Routing	A-16
Photo No. 32.	Post-Test Dummy Cable Routing	A-16
Photo No. 33.	Pre-Test Driver Dummy Front View	A-17
Photo No. 34.	Post-Test Driver Dummy Front View	A-17
Photo No. 35.	Pre-Test Driver Dummy Window View	A-18
Photo No. 36.	Post-Test Driver Dummy Window View	A-18
Photo No. 37.	Pre-Test Driver Dummy and Vehicle Interior (Door Open)	A-19
Photo No. 38.	Post-Test Driver Dummy and Vehicle Interior (Door Open)	A-19
Photo No. 39.	Pre-Test Driver's Seat Fore-Aft Markings	A-20
Photo No. 40.	Post-Test Driver's Seat Fore-Aft Markings	A-20
Photo No. 41.	Pre-Test Driver Dummy Feet	A-21
Photo No. 42.	Post-Test Driver Dummy Feet	A-21
Photo No. 43.	Pre-Test Driver's Side Knee Bolster (without dummy)	A-22
Photo No. 44.	Post-Test Driver's Side Knee Bolster (without dummy)	A-22
Photo No. 45.	Pre-Test Driver's Side Floorpan	A-23
Photo No. 46.	Post-Test Driver's Side Floorpan	A-23
Photo No. 47.	Post-Test Driver Dummy Face	A-24
Photo No. 48.	Post-Test Driver Dummy Contact with Airbag	A-24
Photo No. 49.	Post-Test Driver Dummy Contact with Headrest	A-25
Photo No. 50.	Post-Test Driver Dummy Contact with Knee Bolster	A-25
Photo No. 51.	Pre-Test View of the Steering Wheel	A-26
Photo No. 52.	Post-Test View of the Steering Wheel	A-26
Photo No. 53.	Pre-Test Passenger Dummy Front View	A-27
Photo No. 54.	Post-Test Passenger Dummy Front View	A-27
Photo No. 55.	Pre-Test Passenger Dummy Window View	A-28

		<u>Page No.</u>
Photo No. 56.	Post-Test Passenger Dummy Window View	A-28
Photo No. 57.	Pre-Test Passenger Dummy and Vehicle Interior (Door Open)	A-29
Photo No. 58.	Post-Test Passenger Dummy and Vehicle Interior (Door Open)	A-29
Photo No. 59.	Pre-Test Passenger's Seat Fore-Aft Markings	A-30
Photo No. 60.	Post-Test Passenger's Seat Fore-Aft Markings	A-30
Photo No. 61.	Pre-Test Passenger Dummy Feet	A-31
Photo No. 62.	Post-Test Passenger Dummy Feet	A-31
Photo No. 63.	Pre-Test Passenger's Side Knee Bolster (without dummy)	A-32
Photo No. 64.	Post-Test Passenger's Side Knee Bolster (without dummy)	A-32
Photo No. 65.	Pre-Test Passenger's Side Floorpan	A-33
Photo No. 66.	Post-Test Passenger's Side Floorpan	A-33
Photo No. 67.	Post-Test Passenger Dummy Contact with Airbag	A-34
Photo No. 68.	Post-Test Passenger Dummy Contact with Headrest	A-34
Photo No. 69.	Post-Test Passenger Dummy Contact with Glovebox	A-35
Photo No. 70.	Ballast Installed in Vehicle	A-35
Photo No. 71.	Post-Test Stoddard Solvent Spillage Location View	A-36
Photo No. 72.	Post-Test Speed Trap Read-Out	A-36
Photo No. 73.	Vehicle at 0 Degrees on Static Rollover Device	A-37
Photo No. 74.	Vehicle at 90 Degrees on Static Rollover Device	A-37
Photo No. 75.	Vehicle at 180 Degrees on Static Rollover Device	A-38
Photo No. 76.	Vehicle at 270 Degrees on Static Rollover Device	A-38
Photo No. 77.	Vehicle at 360 Degrees on Static Rollover Device	A-39
Photo No. 78.	2012 Ram Quad Cab 4x4 Frontal Impact Event	A-39
Photo No. 79.	Monroney Label	A-40

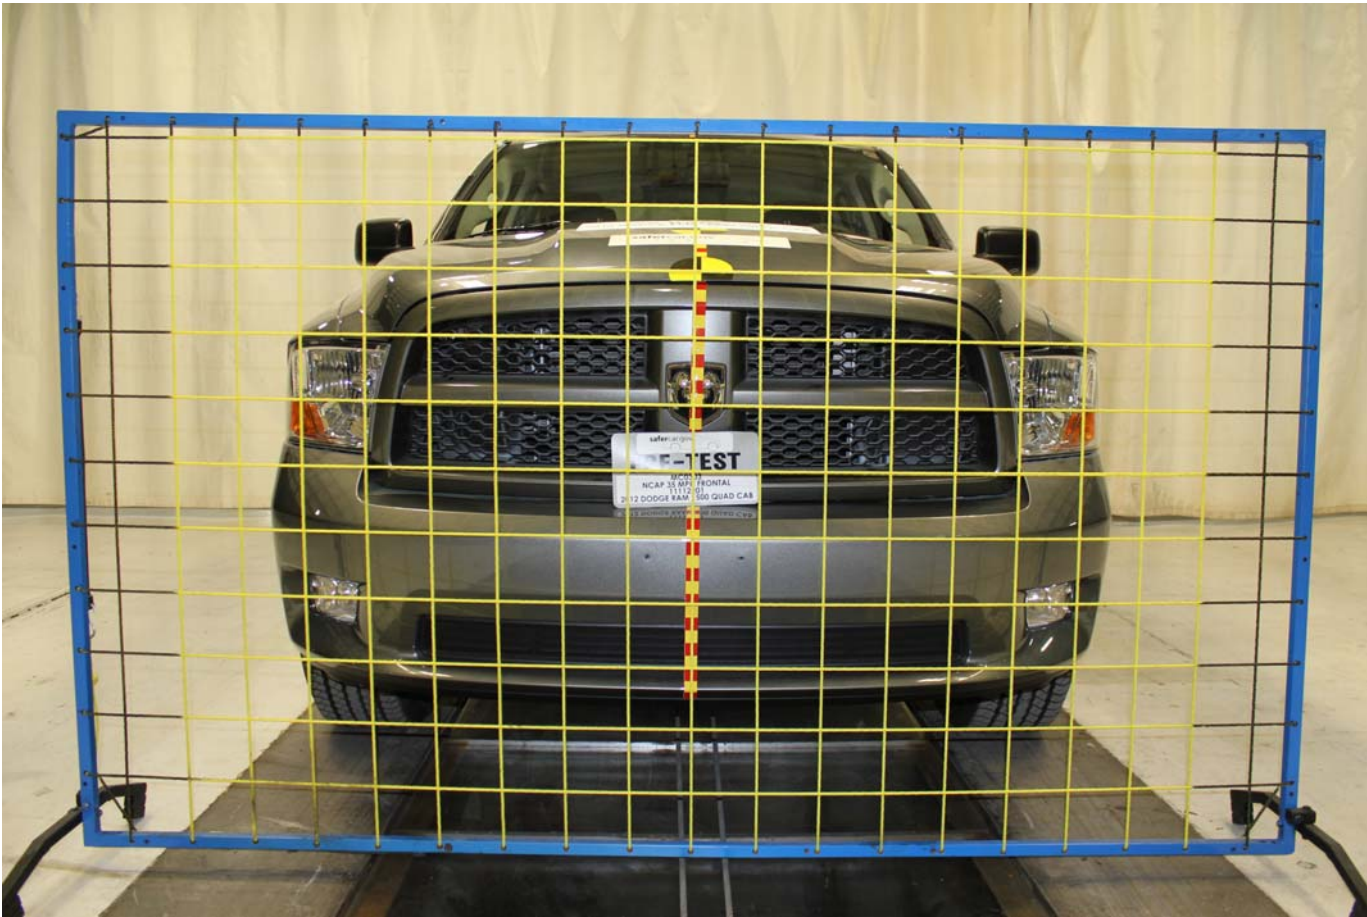


Load Cell Location



Load Cell Wall



Manufacturer's Label

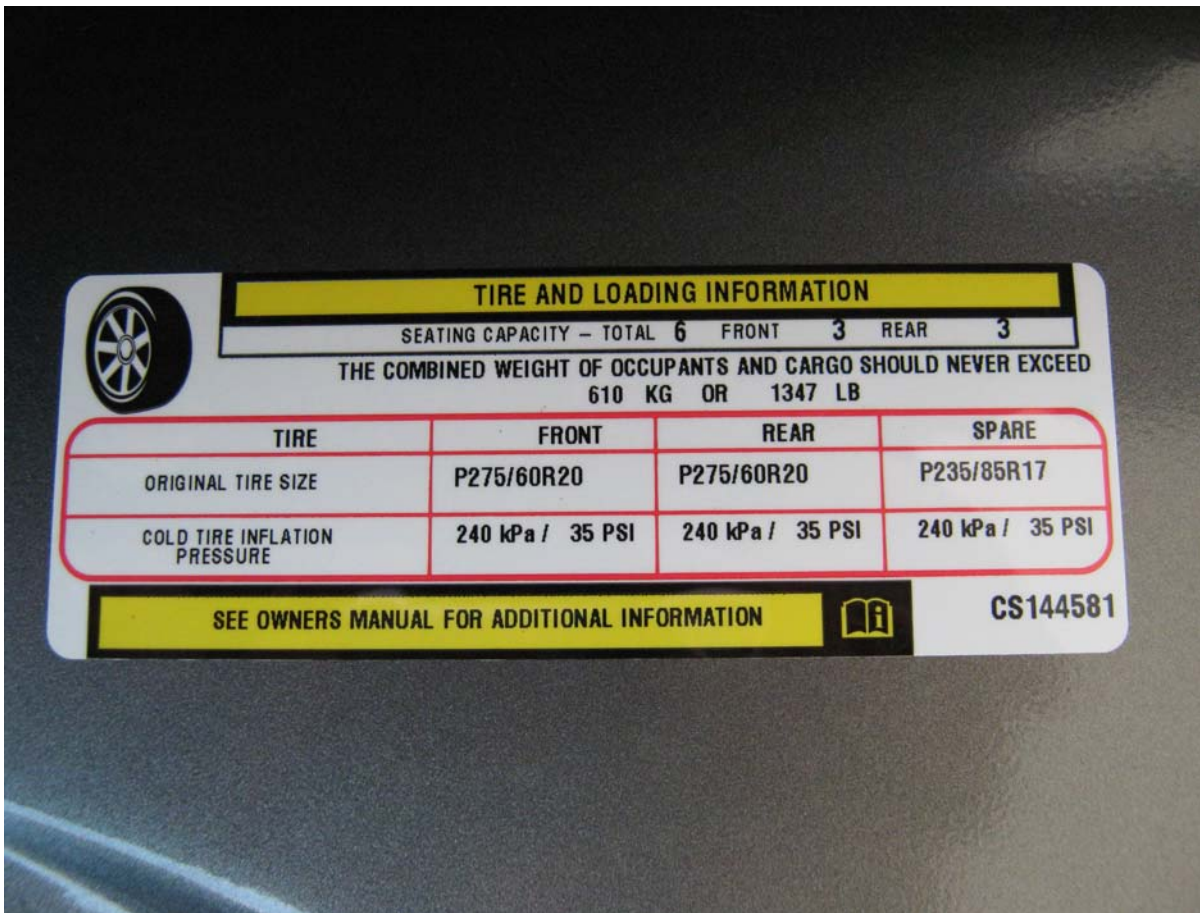

Tire Placard



2012 Dodge Ram Quad Cab Frontal As Delivered



Left Rear Three-Quarter View, As Received



Pre-Test Front View of Test Vehicle



Post-Test Front View of Test Vehicle



Pre-Test Left View of Test Vehicle



Post-Test Left View of Test Vehicle



Pre-Test Right View of Test Vehicle



Post-Test Right View of Test Vehicle



Pre-Test Right Front Three-Quarter View



Post-Test Right Front Three-Quarter View



Pre-Test Left Rear Three-Quarter View



Post-Test Left Rear Three-Quarter View



Pre-Test Windshield View



Post-Test Windshield View



Pre-Test Engine Compartment View



Post-Test Engine Compartment View




Pre-Test Fuel Filler Cap View



Post-Test Fuel Filler Cap View



Pre-Test Front Underbody View

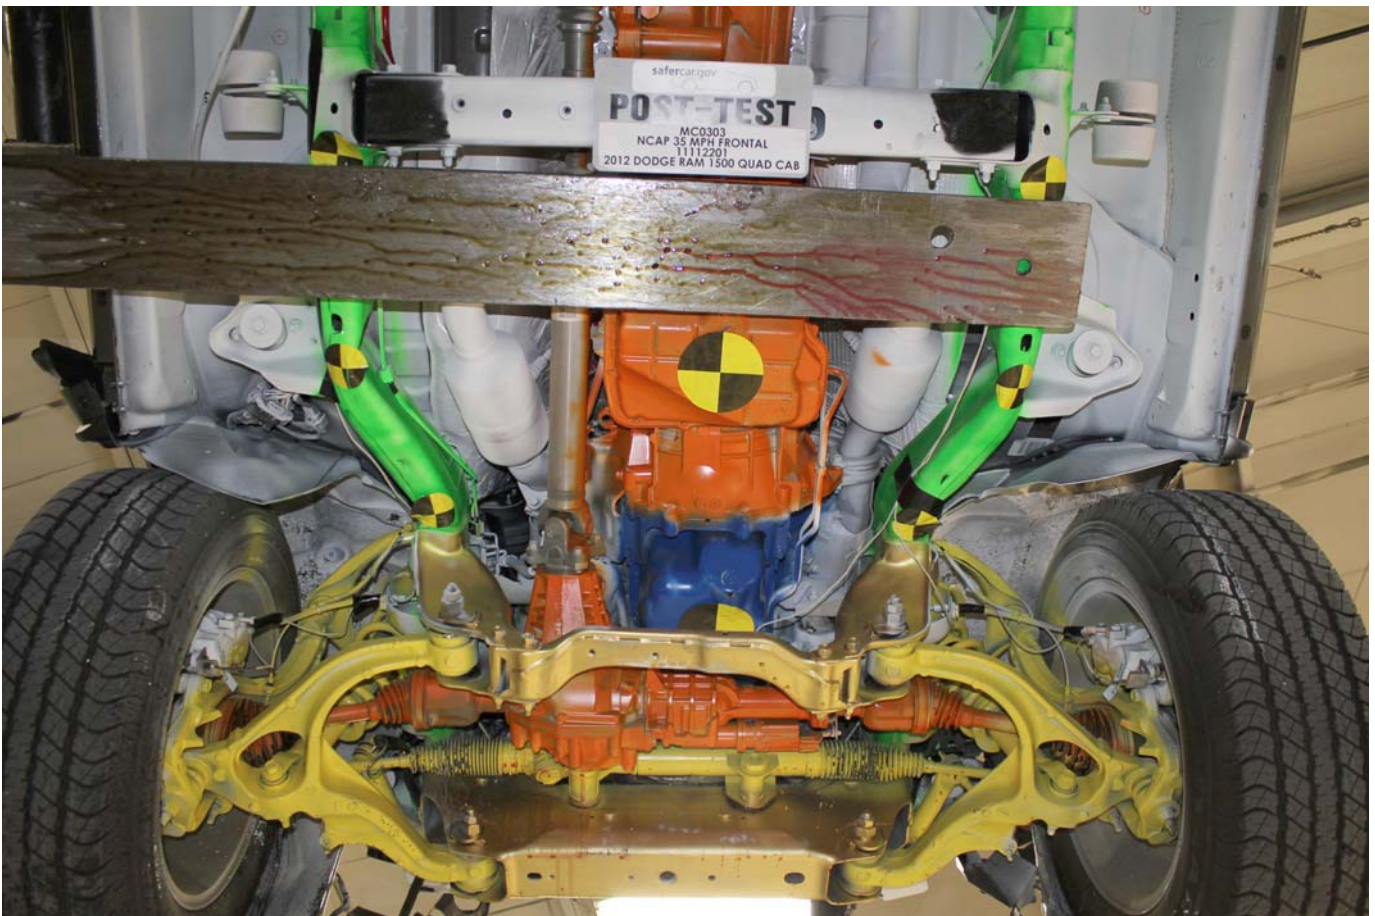


Post-Test Front Underbody View



Pre-Test Mid Front Underbody View



Post-Test Mid Front Underbody View

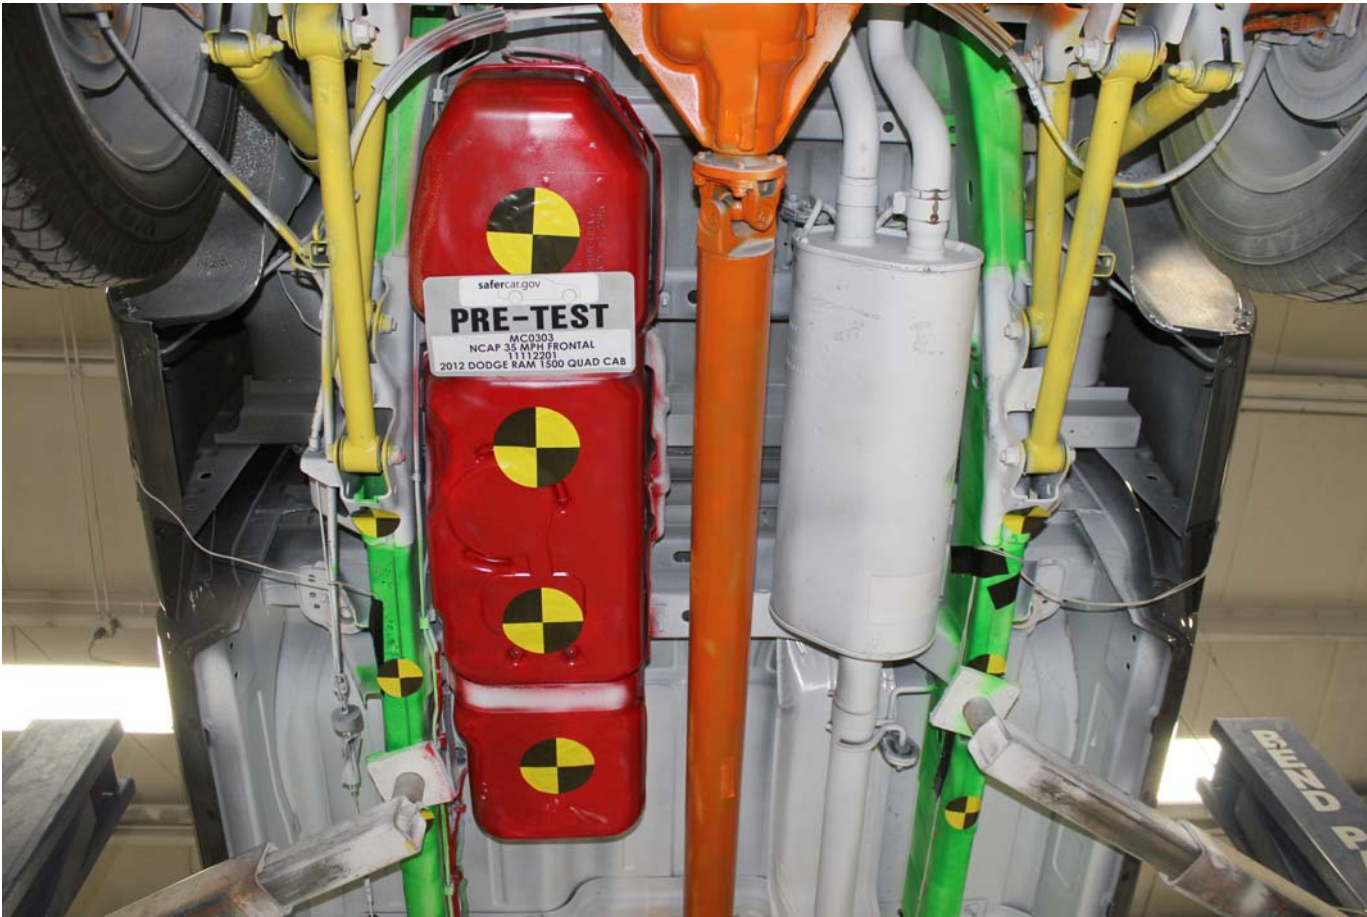


Pre-Test Mid Rear Underbody View




Post-Test Mid Rear Underbody View




Pre-Test Rear Underbody View

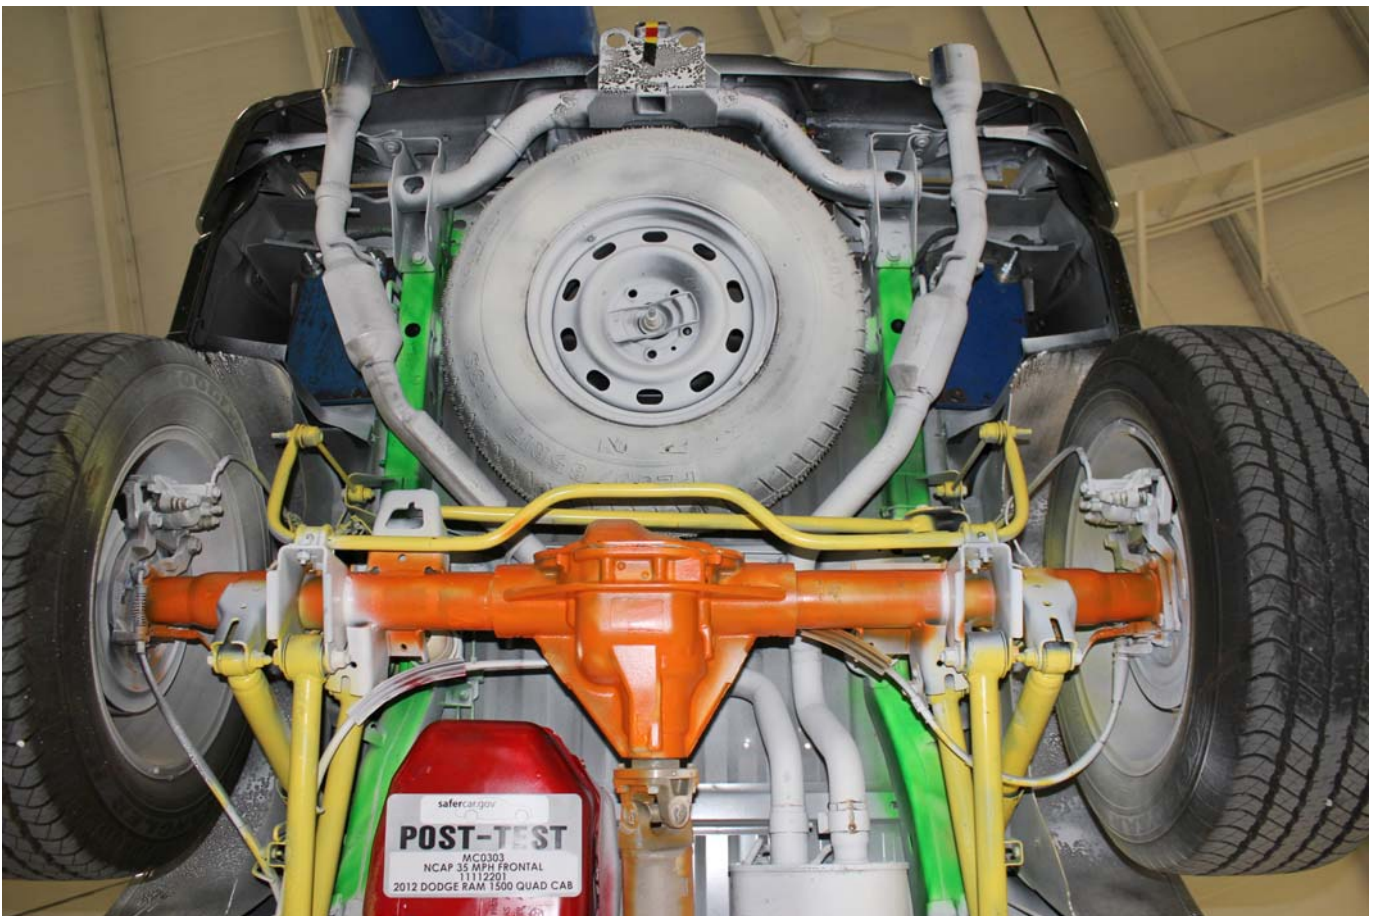

Post-Test Rear Underbody View

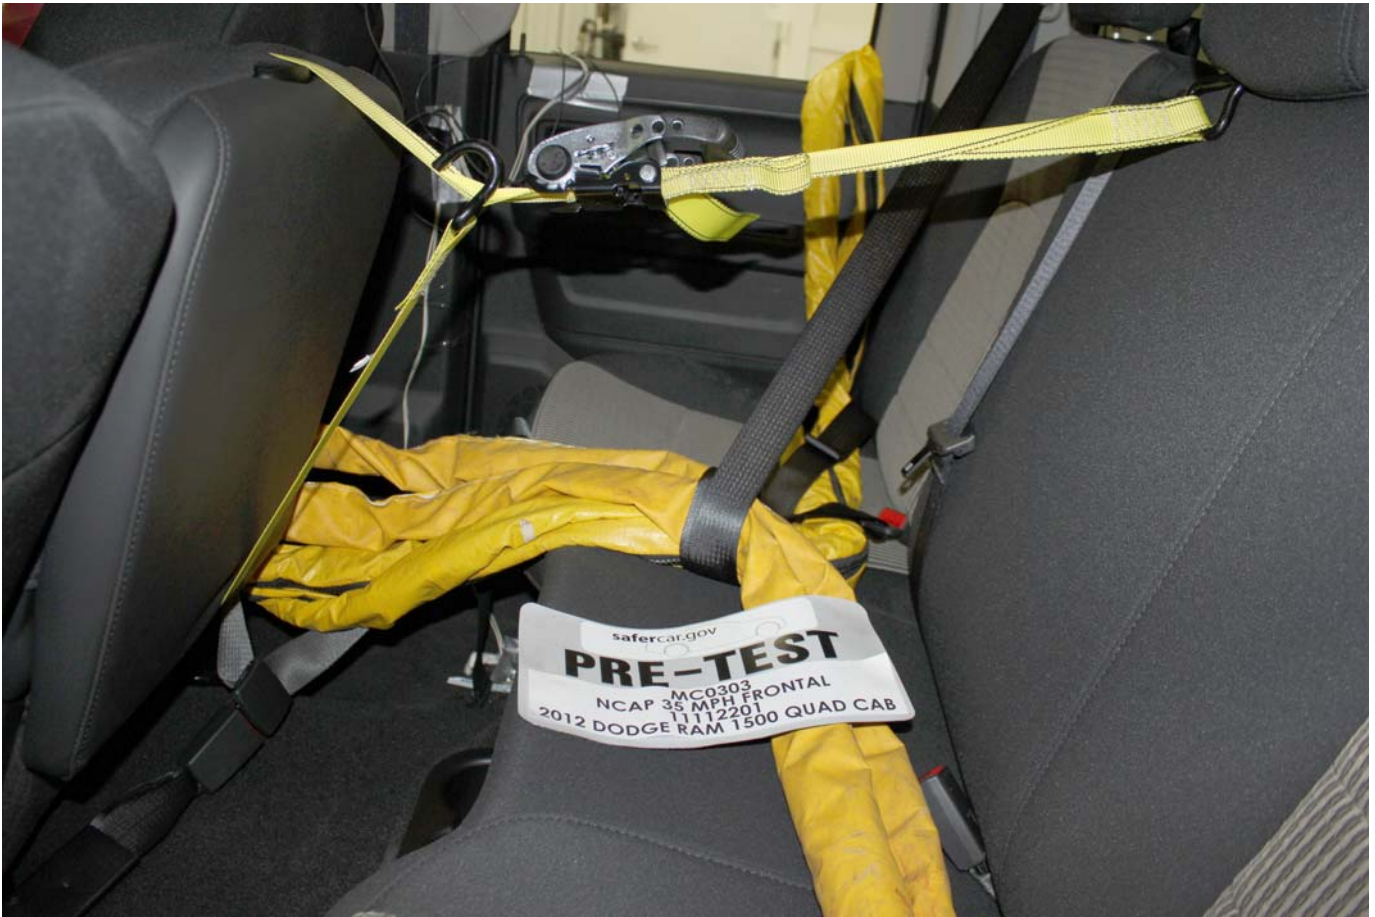

Pre-Test Dummy Cable Routing

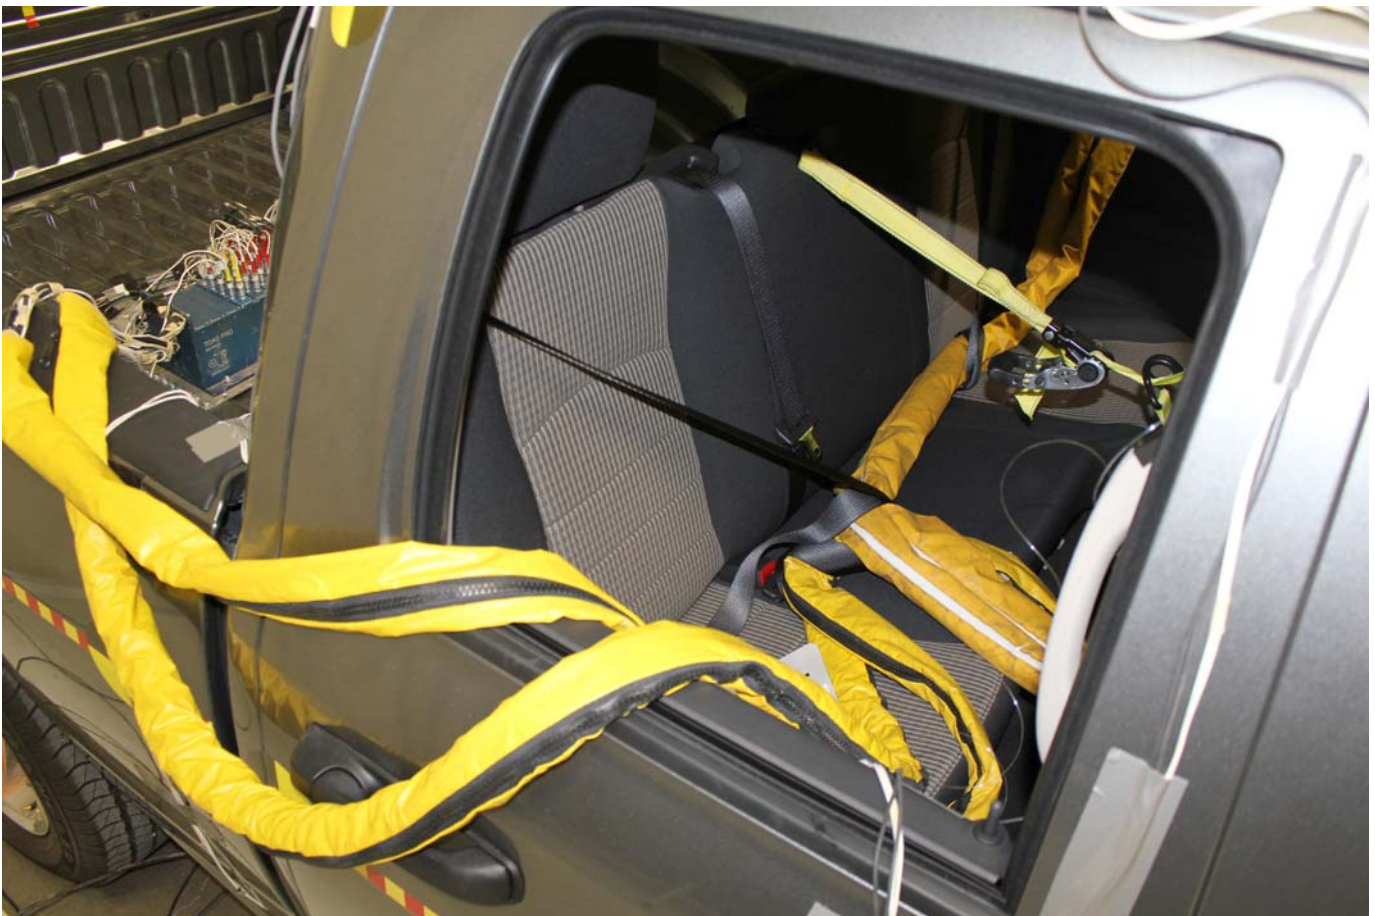

Post-Test Dummy Cable Routing



Pre-Test Driver Dummy Front View



Post-Test Driver Dummy Front View



Pre-Test Driver Dummy Window View




Post-Test Driver Dummy Window View




Pre-Test Driver Dummy and Vehicle Interior (Door Open)



Post-Test Driver Dummy and Vehicle Interior (Door Open)

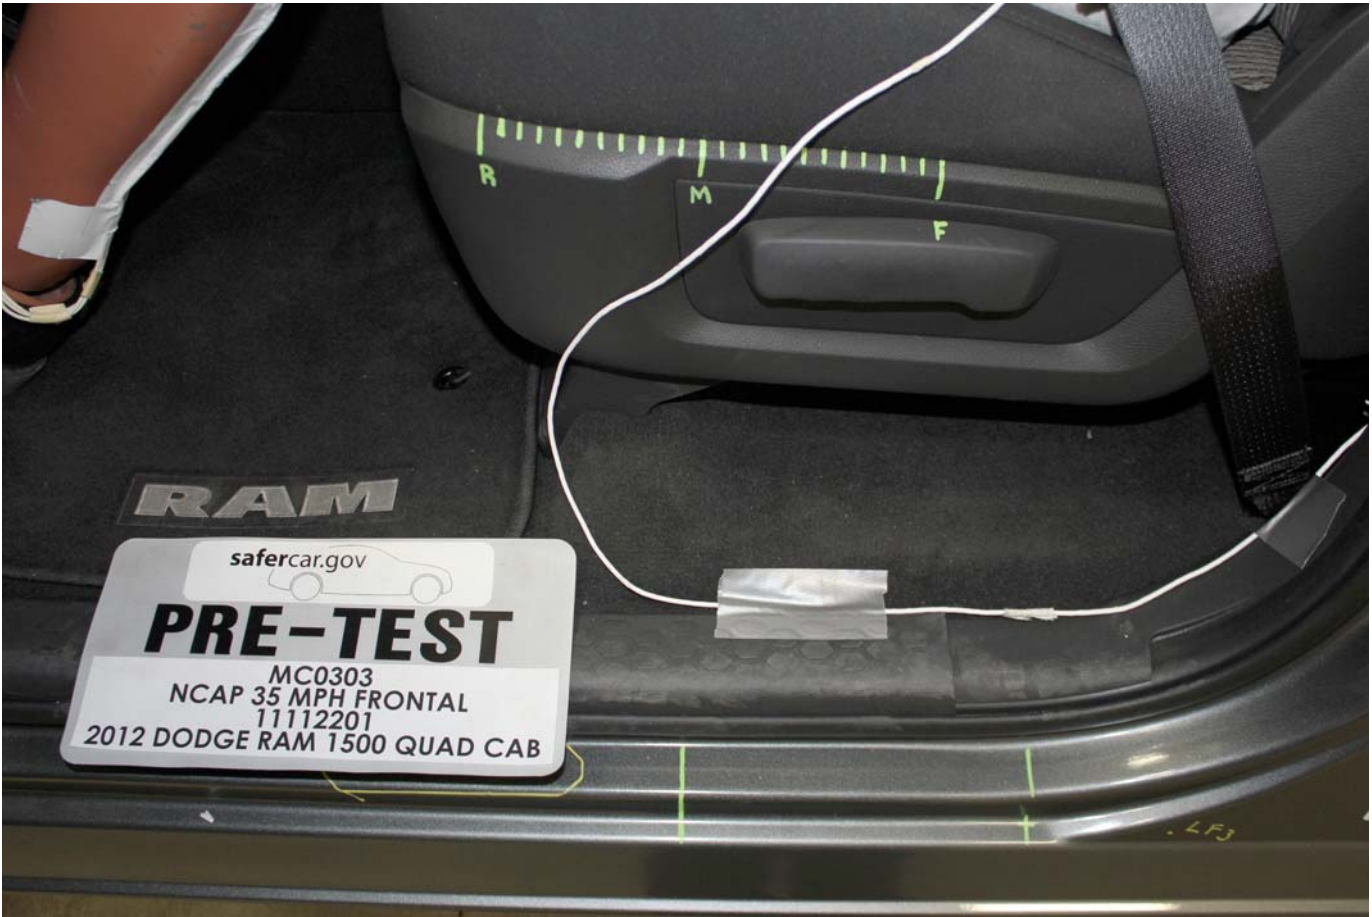

Pre-Test Driver's Seat Fore-Aft Markings

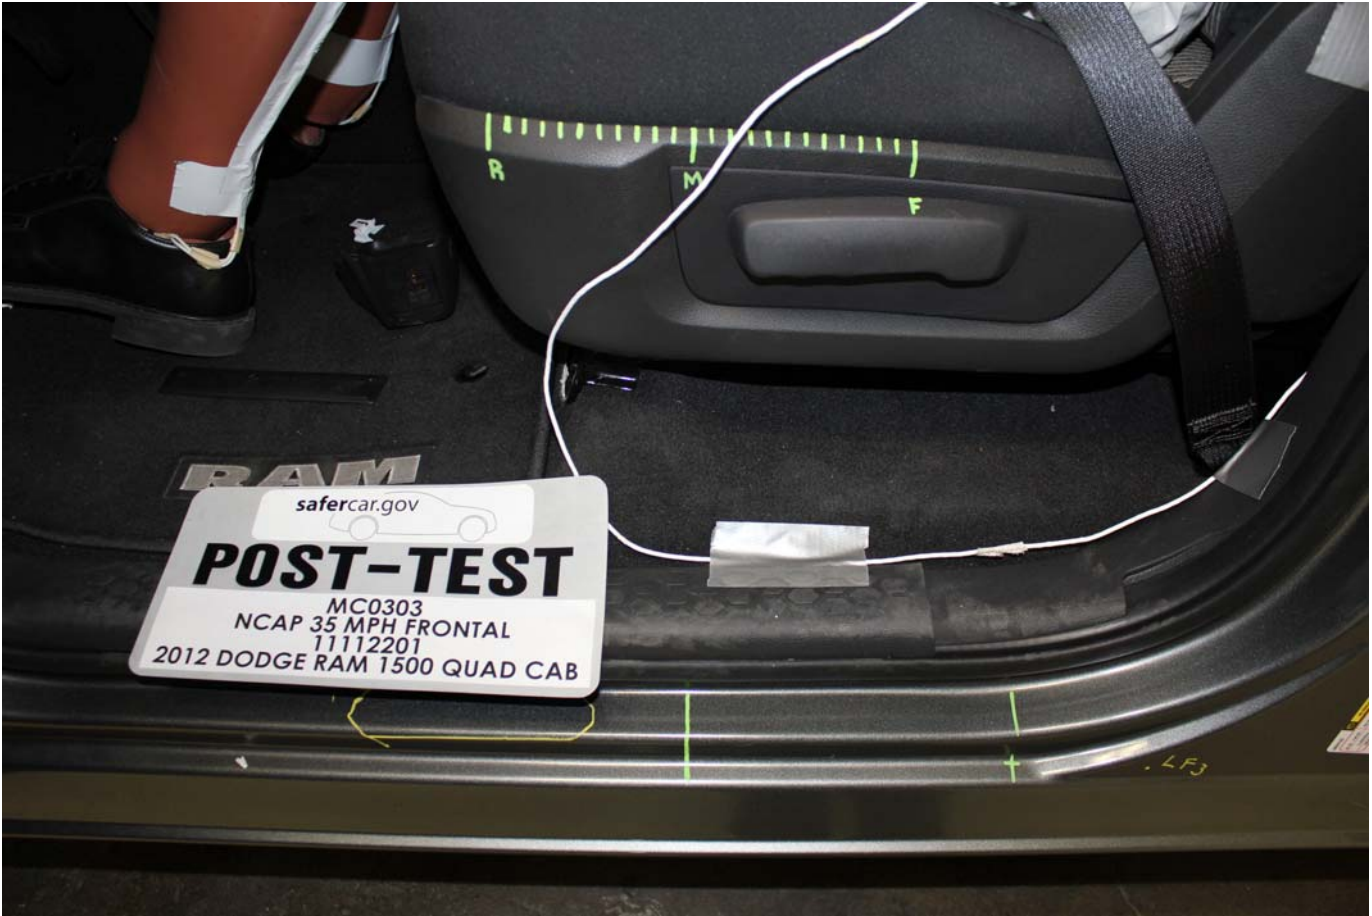

Post-Test Driver's Seat Fore-Aft Markings



Pre-Test Driver Dummy Feet



Post-Test Driver Dummy Feet




Pre-Test Driver's Side Knee Bolster (without dummy)



Post-Test Driver's Side Knee Bolster (without dummy)



Pre-Test Driver's Side Floorpan

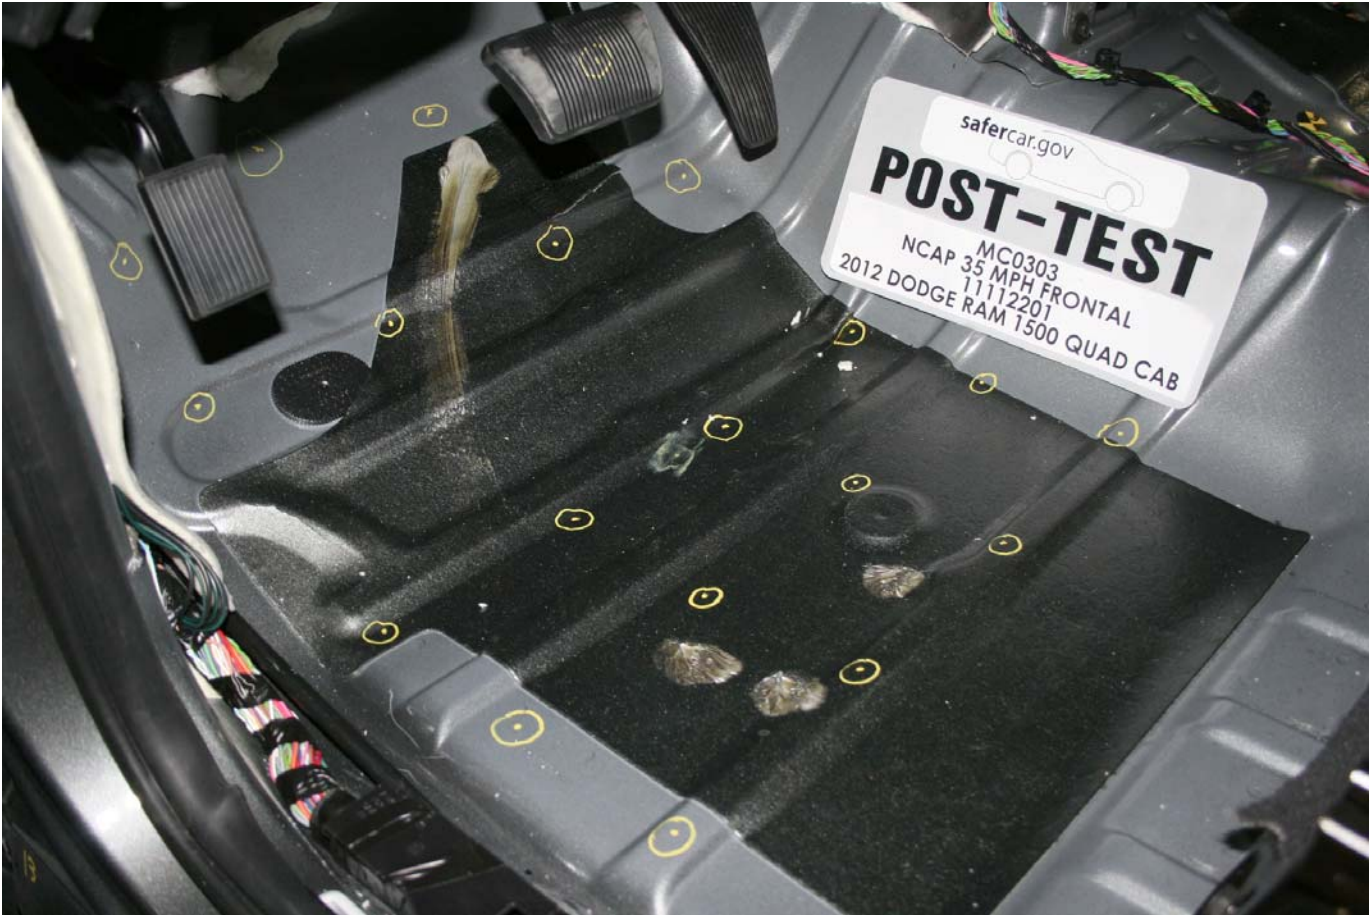

Post-Test Driver's Side Floorpan



Post-Test Driver Dummy Face



Post-Test Driver Dummy Contact with Airbag



Post-Test Driver Dummy Contact with Headrest



Post-Test Driver Dummy Contact with Knee Bolster



Pre-Test View of the Steering Wheel



Post-Test View of the Steering Wheel



Pre-Test Passenger Dummy Front View



Post-Test Passenger Dummy Front View



Pre-Test Passenger Dummy Window View



Post-Test Passenger Dummy Window View



Pre-Test Passenger Dummy and Vehicle Interior (Door Open)



Post-Test Passenger Dummy and Vehicle Interior (Door Open)



Pre-Test Passenger's Seat Fore-Aft Markings



Post-Test Passenger's Seat Fore-Aft Markings



Pre-Test Passenger Dummy Feet



Post-Test Passenger Dummy Feet



Pre-Test Passenger's Side Knee Bolster (without dummy)



Post-Test Passenger's Side Knee Bolster (without dummy)



Pre-Test Passenger's Side Floorpan



Post-Test Passenger's Side Floorpan



Post-Test Passenger Dummy Contact with Airbag



Post-Test Passenger Dummy Contact with Headrest



Post-Test Passenger Dummy Contact with Glovebox



Ballast Installed in Vehicle

PHOTOGRAPH NOT APPLICABLE


Post-Test Stoddard Solvent Spillage Location View




Post-Test Speed Trap Read-Out



Vehicle at 0 Degrees on Static Rollover Device

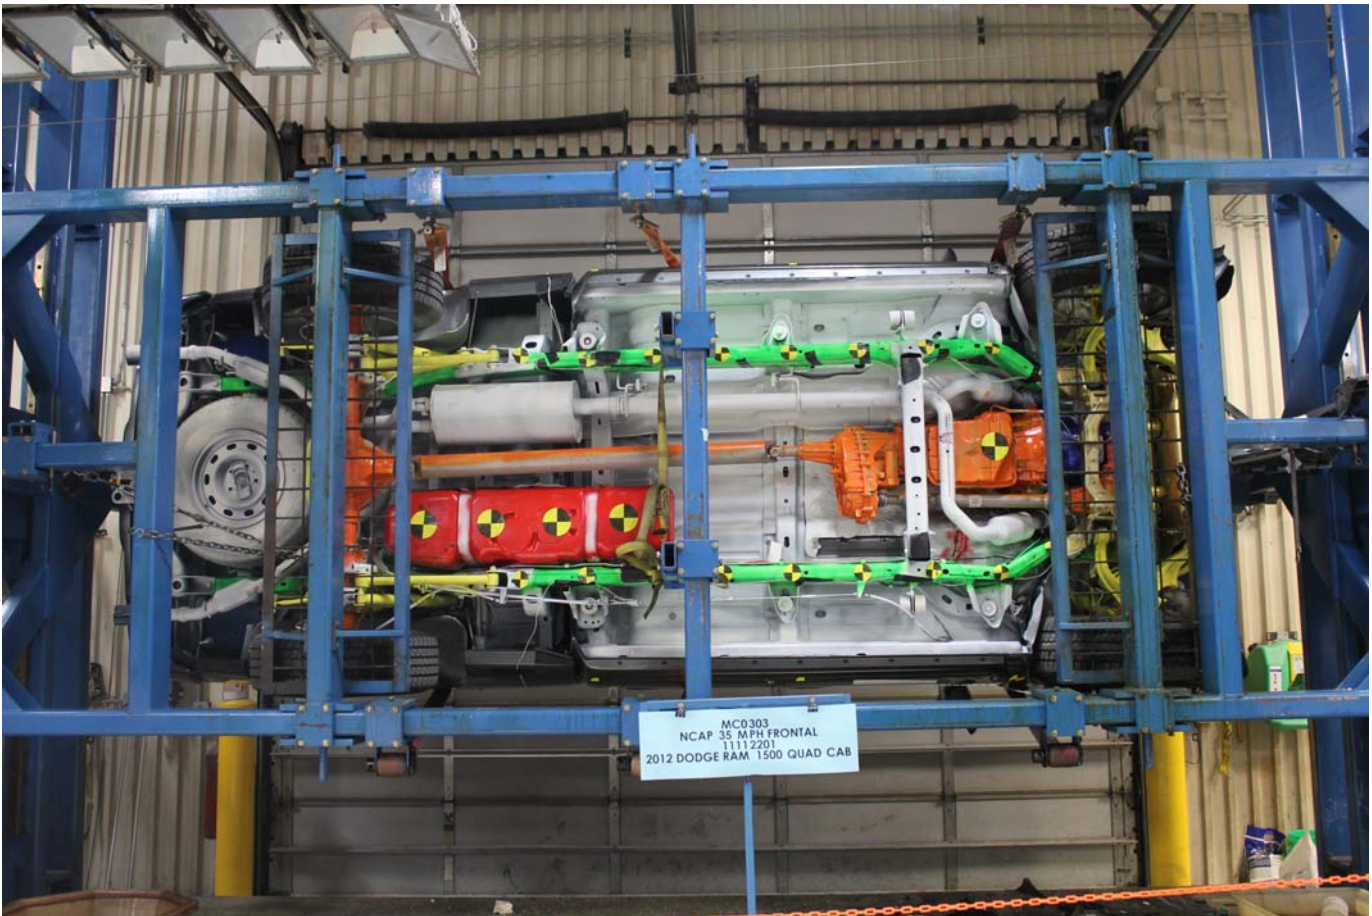

Vehicle at 90 Degrees on Static Rollover Device

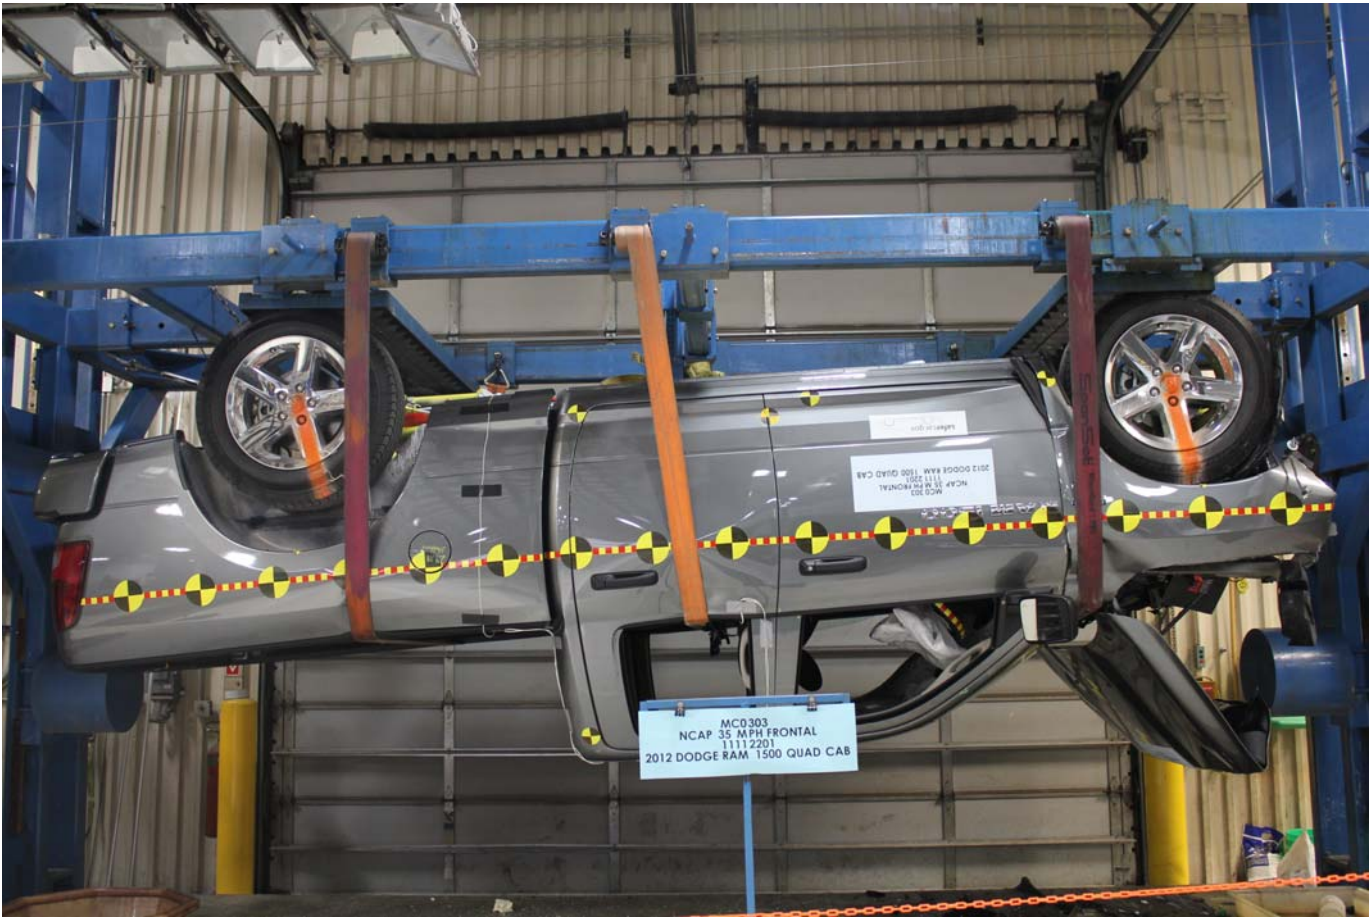

Vehicle at 180 Degrees on Static Rollover Device



Vehicle at 270 Degrees on Static Rollover Device



Vehicle at 360 Degrees on Static Rollover Device



2012 Dodge Ram Quad Cab Frontal Impact Event



2012 MODEL YEAR
RAM 1500 ST QUAD CAB 4X4

For more information visit: www.ramtrucks.com
or call 1-866-RAMINFO

Chrysler Group LLC

THIS VEHICLE IS MANUFACTURED TO MEET SPECIFIC UNITED STATES REQUIREMENTS. THIS VEHICLE IS NOT MANUFACTURED FOR SALE OR REGISTRATION OUTSIDE OF THE UNITED STATES.

MANUFACTURER'S SUGGESTED RETAIL PRICE OF THIS MODEL INCLUDING DEALER PREPARATION

Base Price: \$30,010

DODGE RAM 1500 ST QUAD CAB 4X4
Exterior Color: Mineral Gray Metallic Clear Coat Exterior Paint
Interior Color: Dark Slate / Medium Graystone Interior Colors
Interior: Cloth 40/20/40 Bench Seat
Engine: 5.7-Liter V6 HEMI MDS VVT Engine
Transmission: 6-Speed Automatic 65RFE Transmission

STANDARD EQUIPMENT (UNLESS REPLACED BY OPTIONAL EQUIPMENT)

FUNCTIONAL/SAFETY FEATURES

Tailor Tone Wiring with 4-Pin Connector
7-Pin Wiring Harness
28-Gallon Fuel Tank
Advanced Multistage Front Airbags
Supplemental Side-Curtain Front and Rear Airbags
Electronic Stability Control
Anti-lock 4-Wheel-Disc Brakes
160-Amp Alternator
Sentry Key Theft Deterrent System
Power Locks
Power Accessory Delay
Automatic Headlamps
Tire Pressure Monitoring Warning Lamp
Variable Intermittent Windshield Wipers
Locking Tailgate
Electric Shift-on-the-Fly Part Time Transfer Case

INTERIOR FEATURES

Air Conditioning
Media Center 130 CD/MP3
6 Speakers
Audio Jack Input for Mobile Devices
Rear Folding Seat
Power Windows with Front One-Touch Up and Down Feature
Rear Under Seat Storage Compartment
Tilt Steering Column
12-Volt Auxiliary Power Outlet

EXTERIOR FEATURES

17-Inch x 7.0-Inch Steel Argent Wheels
P275/70R17 BSW All Season Tires
Full-Size Spare Tire
Black Exterior Mirrors
Black Door Handles
Halogen Headlamps
Power Heated Mirrors with Manual Fold-Away
Tinted Glass Windows

OPTIONAL EQUIPMENT

Customer Preferred Package 25C **\$1,265**
RAM 1500 Express
Floor Covering Carpet
20-Inch x 8.0-Inch Aluminum Wheels
P275/60R20 BSW All Season Tires
Body-Color Grille
Dual Rear Exhaust
Front and Rear Roof Mats
Fog Lamps
Full-Size Temporary Use Spare Tire
Locking Lug Nuts
ST Popular Equipment Group **\$785**
Cloth 40/20/40 Bench Seat
Speed Control
SiriusXM Satellite Radio w/ 1-Yr Radio Subscription
For More Information, Call 888-538-7474
Remote Keyless Entry **\$50**
3.92 Rear Axle Ratio
20-Inch x 8.0-Inch Aluminum Chrome-Clad Wheels **\$400**
Class IV Receiver Hitch **\$335**

DESTINATION CHARGE \$995

Package Value Savings of \$1,800
Included in Express Price

TOTAL PRICE: * \$33,840

WARRANTY COVERAGE

5-year or 100,000-mile Powertrain Limited Warranty.
3-year or 35,000-mile Basic Limited Warranty.
24-hour towing assistance; certain restrictions apply.
Ask Dealer for a copy of the limited warranties or see your owner's manual for details.

**5 YEAR/100,000 MILE
POWERTRAIN WARRANTY**

EPA Fuel Economy Estimates

These estimates reflect new EPA methods beginning with 2008 models.

CITY MPG

13

Expected range for most drivers
10 to 16 MPG

HIGHWAY MPG

19

Expected range for most drivers
15 to 23 MPG

Estimated Annual Fuel Cost

\$3,852

based on 15,000 miles at \$3.85 per gallon

Combined Fuel Economy

15

All STANDARD PICKUPS

Your actual mileage will vary depending on how you drive and maintain your vehicle.

See the FREE Fuel Economy Guide at dealers or www.fueleconomy.gov

GOVERNMENT SAFETY RATINGS

Frontal Crash Driver Passenger Not Rated Not Rated

Star ratings based on the risk of injury in a frontal impact.
Frontal ratings should ONLY be compared to other vehicles of similar size and weight.

Side Crash Front seat Rear seat **★★★★** **★★★★**

Star ratings based on the risk of injury in a side impact.

▲ Safety concern: Visit www.safercar.gov or call 1-888-327-4236 for more details.

Rollover **★★★**

Star ratings based on the risk of rollover in a single vehicle crash.

Star ratings range from 1 to 5 stars (★★★★) with 5 being the highest.
Source: National Highway Traffic Safety Administration (NHTSA).

www.safercar.gov or 1-888-327-4236

The safety ratings above are based on Federal Government tests of particular vehicles equipped with certain features and options. The performance of this vehicle may differ.

PARTS CONTENT INFORMATION

FOR VEHICLES IN THIS COUNTRY:
U.S./CANADIAN PARTS CONTENT: 70 %
MAJOR SOURCES OF FOREIGN PARTS

CONTENT:
MEXICO: 18 %

NOTE: PARTS CONTENT DOES NOT INCLUDE FINAL ASSEMBLY, DISTRIBUTION, OR OTHER NON-PARTS COSTS.

FOR THIS VEHICLE:
FINAL ASSEMBLY POINT:
WARREN, MICHIGAN, U.S.A.

COUNTRY OF ORIGIN:
ENGINE: MEXICO
TRANSMISSION: UNITED STATES

Snow Plow Prep Disclaimers:
This vehicle not factory equipped for Snow Plow Installation. See dealer for details.

Assembly Point/Part of Entry: WARREN, MICHIGAN, U.S.A.

SHIP TO: 827N 50
FRANK BOUCHER CHRYSLER, DODGE,
4001 MILTON AVE
JANESVILLE WI 53446-9643

SHIP TO: 81 8919
FRANK BOUCHER CHRYSLER, DODGE,
4001 MILTON AVE
JANESVILLE WI 53446-9643

THIS LABEL IS ADDED TO THIS VEHICLE TO COMPLY WITH FEDERAL LAW. THE LABEL CANNOT BE REMOVED OR ALTERED PRIOR TO DELIVERY TO THE ultimate PURCHASER.
STATE AND/OR LOCAL TAXES OF ANY LICENSE AND TITLE FEE AND FRANCHISE SUPPLIER AND INSTALLATION CHARGES ARE ADDITIONALLY NOT INCLUDED IN THIS PRICE. OCCIDENT, IF ANY, IS BASED ON PRICE OF OPTIONS IF PURCHASED SEPARATELY.



Monroney Label

APPENDIX B
DUMMY RESPONSE DATA TRACES

TABLE OF DATA PLOTS

Page No.

List of Data Plots Provided in the Test Report

Figure No. 1.	Driver Head X Acceleration vs. Time	B-1
Figure No. 2.	Driver Head Y Acceleration vs. Time	B-1
Figure No. 3.	Driver Head Z Acceleration vs. Time	B-1
Figure No. 4.	Driver Head Resultant Acceleration vs. Time	B-1
Figure No. 5.	Driver Chest Displacement vs. Time	B-2
Figure No. 6.	Driver Chest X Acceleration vs. Time	B-3
Figure No. 7.	Driver Chest Y Acceleration vs. Time	B-3
Figure No. 8.	Driver Chest Z Acceleration vs. Time	B-3
Figure No. 9.	Driver Chest Resultant Acceleration vs. Time	B-3
Figure No. 10.	Driver Neck Force X vs. Time	B-4
Figure No. 11.	Driver Neck Force Z vs. Time	B-4
Figure No. 12.	Driver Neck Moment Y vs. Time	B-4
Figure No. 13.	Driver Nij (NTF) vs. Time	B-5
Figure No. 14.	Driver Nij (NTE) vs. Time	B-5
Figure No. 15.	Driver Nij (NCF) vs. Time	B-5
Figure No. 16.	Driver Nij (NCE) vs. Time	B-5
Figure No. 17.	Driver Left Femur Force vs. Time	B-6
Figure No. 18.	Driver Right Femur Force vs. Time	B-6
Figure No. 19.	Passenger Head X Acceleration vs. Time	B-7
Figure No. 20.	Passenger Head Y Acceleration vs. Time	B-7
Figure No. 21.	Passenger Head Z Acceleration vs. Time	B-7
Figure No. 22.	Passenger Head Resultant Acceleration vs. Time	B-7
Figure No. 23.	Passenger Chest Displacement vs. Time	B-8
Figure No. 24.	Passenger Chest X Acceleration vs. Time	B-9
Figure No. 25.	Passenger Chest Y Acceleration vs. Time	B-9
Figure No. 26.	Passenger Chest Z Acceleration vs. Time	B-9
Figure No. 27.	Passenger Chest Resultant Z Acceleration vs. Time	B-9




	<u>Page No.</u>
Figure No. 28. Passenger Neck Force X vs. Time	B-10
Figure No. 29. Passenger Neck Force Z vs. Time	B-10
Figure No. 30. Passenger Neck Moment Y vs. Time	B-10
Figure No. 31. Passenger Nij (NTF) vs. Time	B-11
Figure No. 32. Passenger Nij (NTE) vs. Time	B-11
Figure No. 33. Passenger Nij (NCF) vs. Time	B-11
Figure No. 34. Passenger Nij (NCE) vs. Time	B-11
Figure No. 35. Passenger Left Femur Force vs. Time	B-12
Figure No. 36. Passenger Right Femur Force vs. Time	B-12


The following additional dummy and vehicle response data can be found in the R&D section of the NHTSA website at www.nhtsa.dot.gov




Driver Head X Redundant
 Driver Head Y Redundant
 Driver Head Z Redundant
 Driver Upper Neck Force Y
 Driver Upper Neck Moment X
 Driver Upper Neck Moment Z
 Driver Chest X Redundant
 Driver Chest Y Redundant
 Driver Chest Z Redundant
 Driver Pelvis X
 Driver Pelvis Y
 Driver Pelvis Z
 Driver Left Femur Redundant
 Driver Right Femur Redundant
 Driver Left Upper Tibia Moment X
 Driver Left Upper Tibia Moment Y
 Driver Left Upper Tibia Force Z
 Driver Left Lower Tibia Moment X




Driver Left Lower Tibia Moment Y
Driver Left Lower Tibia Force Z
Driver Right Upper Tibia Moment X
Driver Right Upper Tibia Moment Y
Driver Right Upper Tibia Force Z
Driver Right Lower Tibia Moment X
Driver Right Lower Tibia Moment Y
Driver Right Lower Tibia Force Z
Driver Left Foot Fore Z
Driver Left Foot Aft X
Driver Left Foot Aft Z
Driver Right Foot Fore Z
Driver Right Foot Aft X
Driver Right Foot Aft Z
Driver Lap Belt Force
Driver Shoulder Belt Force
Passenger Head X Redundant
Passenger Head Y Redundant
Passenger Head Z Redundant
Passenger Upper Neck Force Y
Passenger Upper Neck Moment X
Passenger Upper Neck Moment Z
Passenger Chest X Redundant
Passenger Chest Y Redundant
Passenger Chest Z Redundant
Passenger Pelvis X
Passenger Pelvis Y
Passenger Pelvis Z
Passenger Left Femur Redundant
Passenger Right Femur Redundant
Passenger Left Upper Tibia Moment X





Passenger Left Upper Tibia Moment Y
Passenger Left Upper Tibia Force Z
Passenger Left Lower Tibia Moment X
Passenger Left Lower Tibia Moment Y
Passenger Left Lower Tibia Force Z
Passenger Right Upper Tibia Moment X
Passenger Right Upper Tibia Moment Y
Passenger Right Upper Tibia Force Z
Passenger Right Lower Tibia Moment X
Passenger Right Lower Tibia Moment Y
Passenger Right Lower Tibia Force Z
Passenger Left Foot Fore Z
Passenger Left Foot Aft X
Passenger Left Foot Aft Z
Passenger Right Foot Fore Z
Passenger Right Foot Aft X
Passenger Right Foot Aft Z
Passenger Lap Belt Force
Passenger Shoulder Belt Force
Left Rear Seat Crossmember X
Right Rear Seat Crossmember X
Vehicle Engine Top X
Vehicle Engine Bottom X
Vehicle Left Brake Caliper X
Vehicle Right Brake Caliper X
Left Rear Seat Crossmember Xr
Right Rear Seat Crossmember Xr
Advanced Research Load Cell Barrier – 128 channels

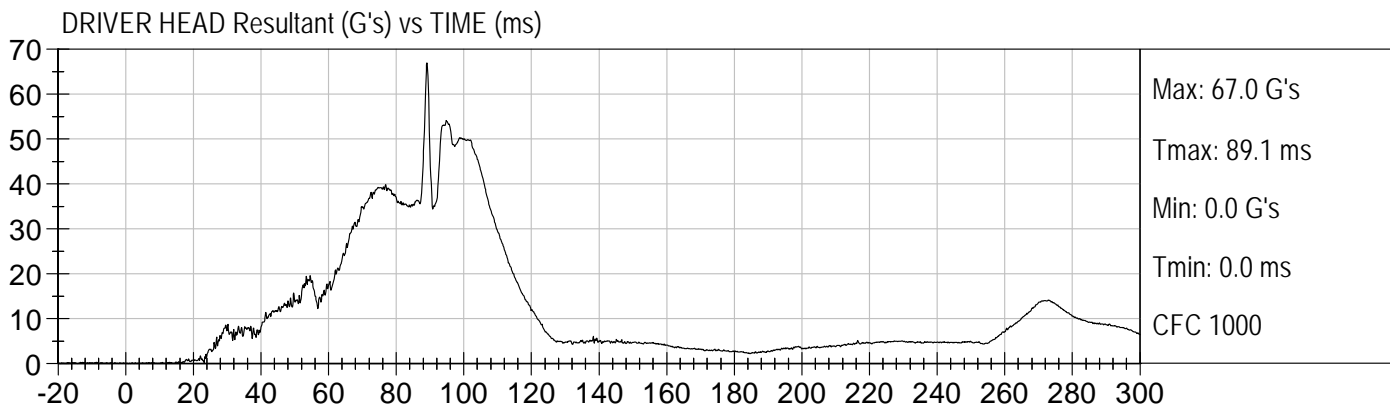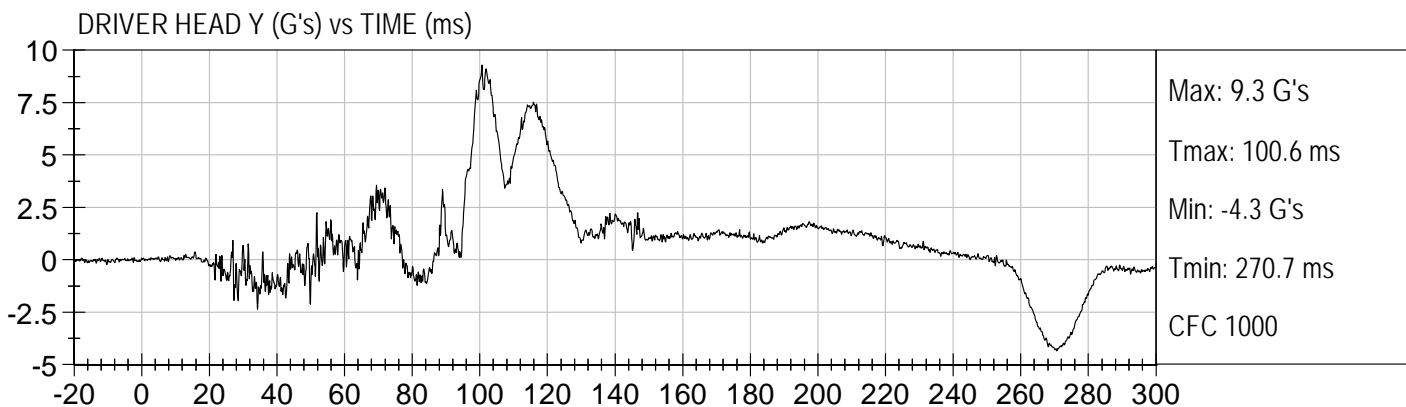
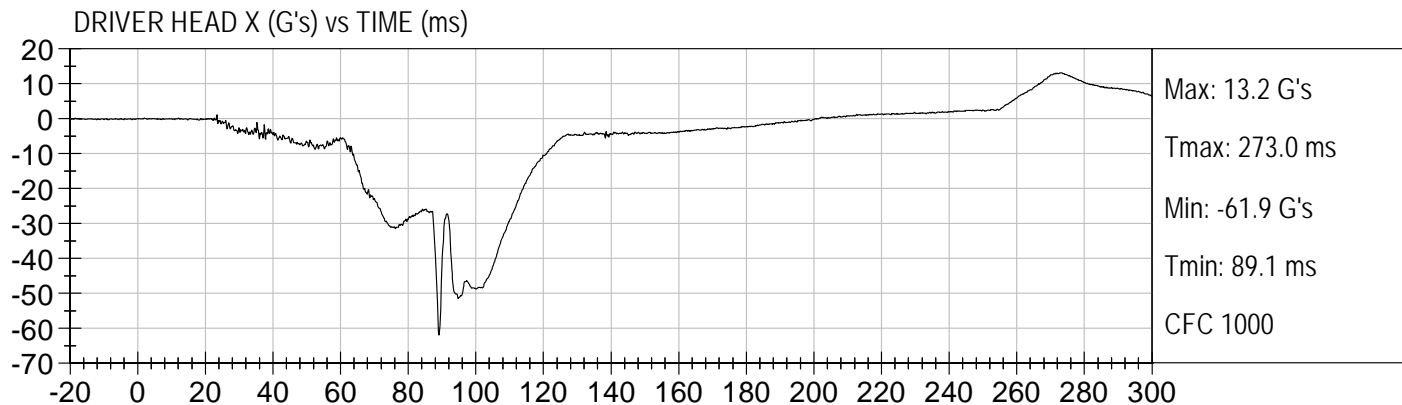


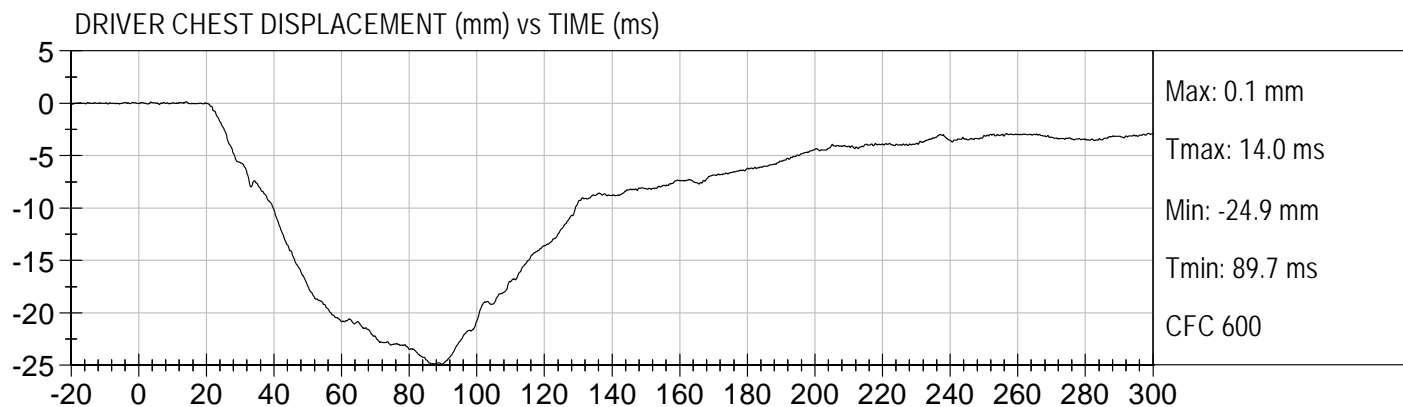

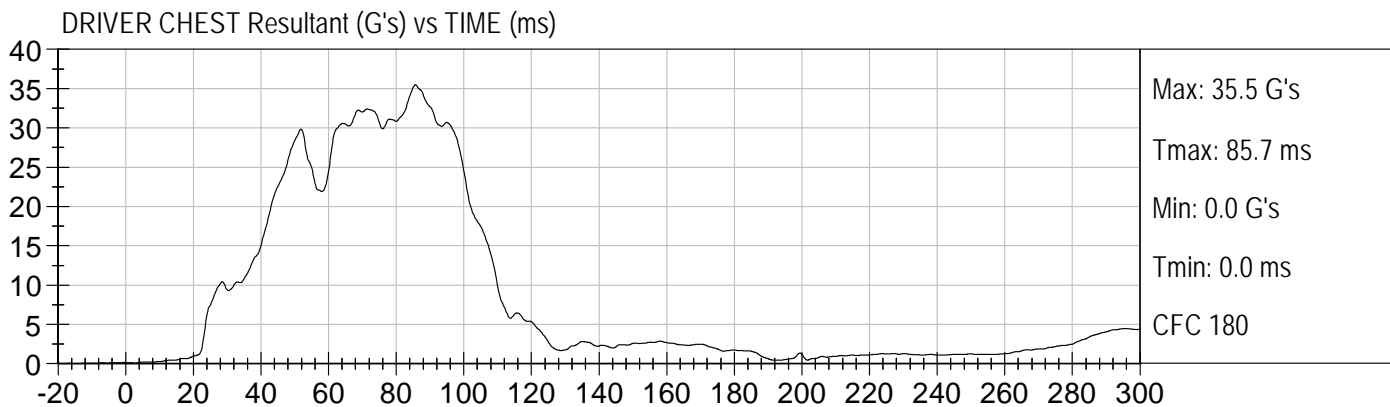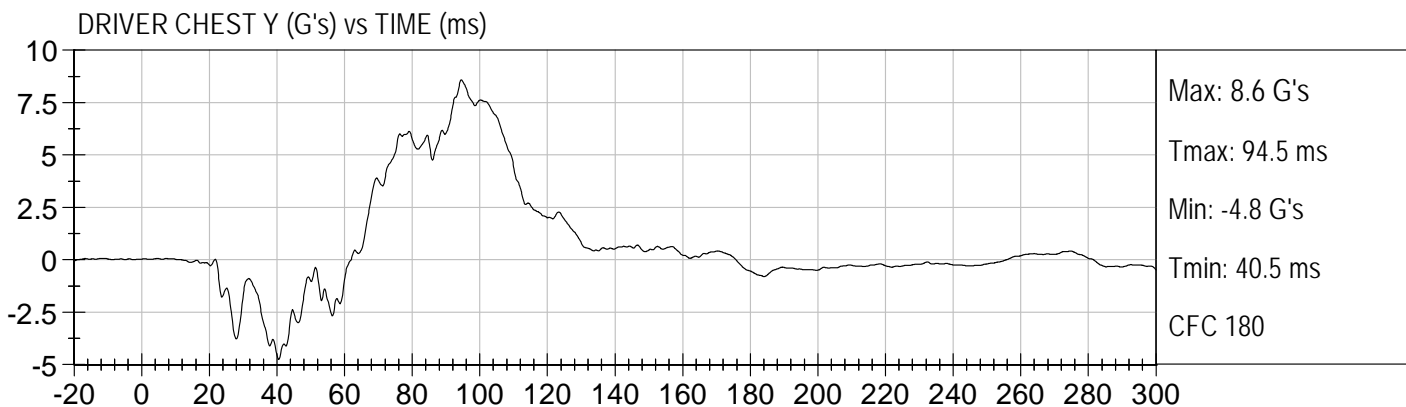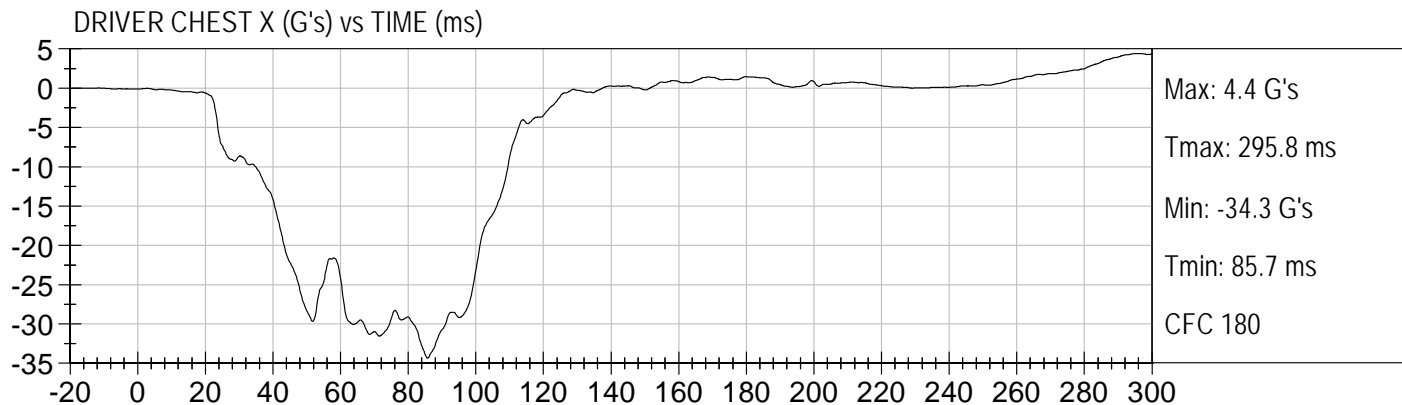

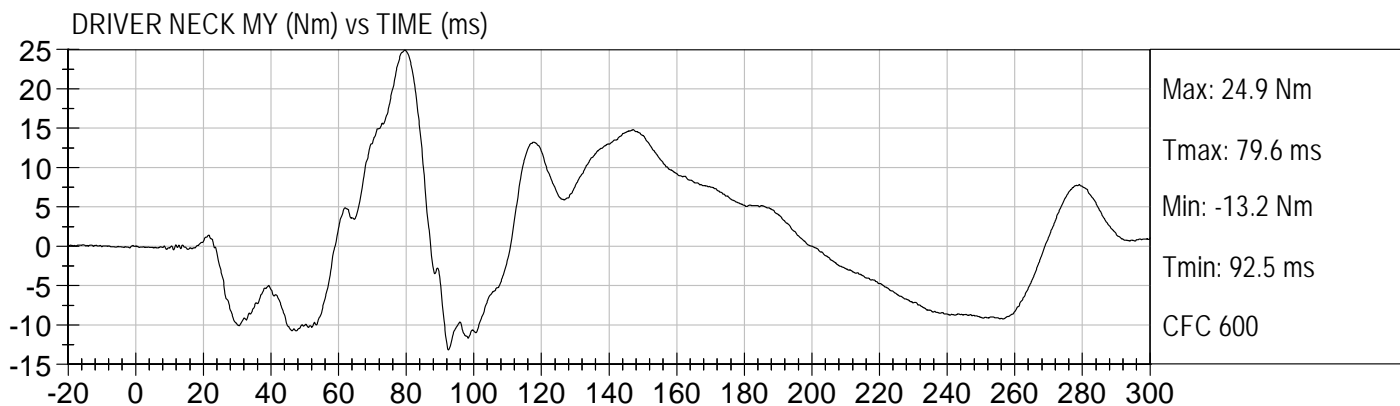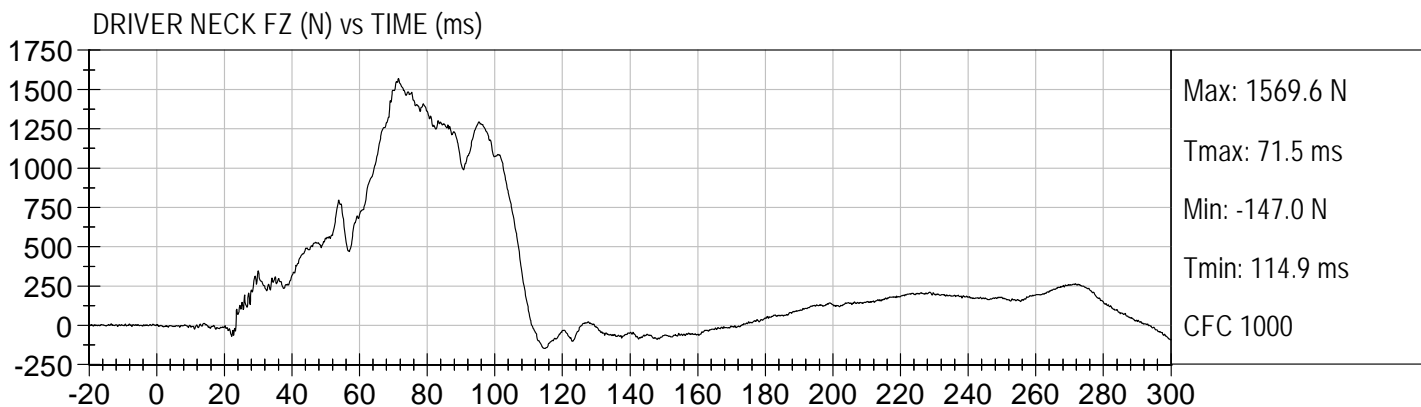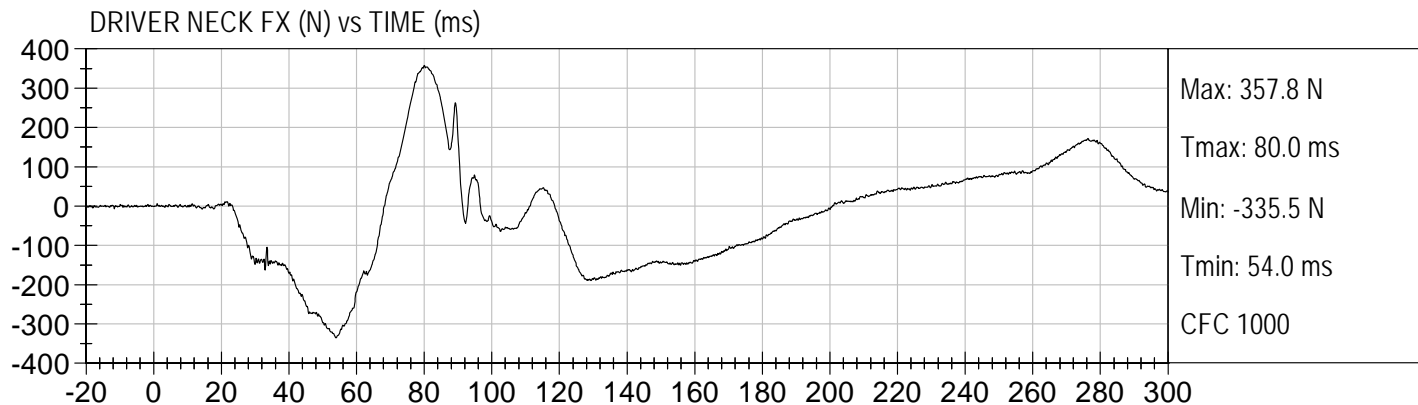


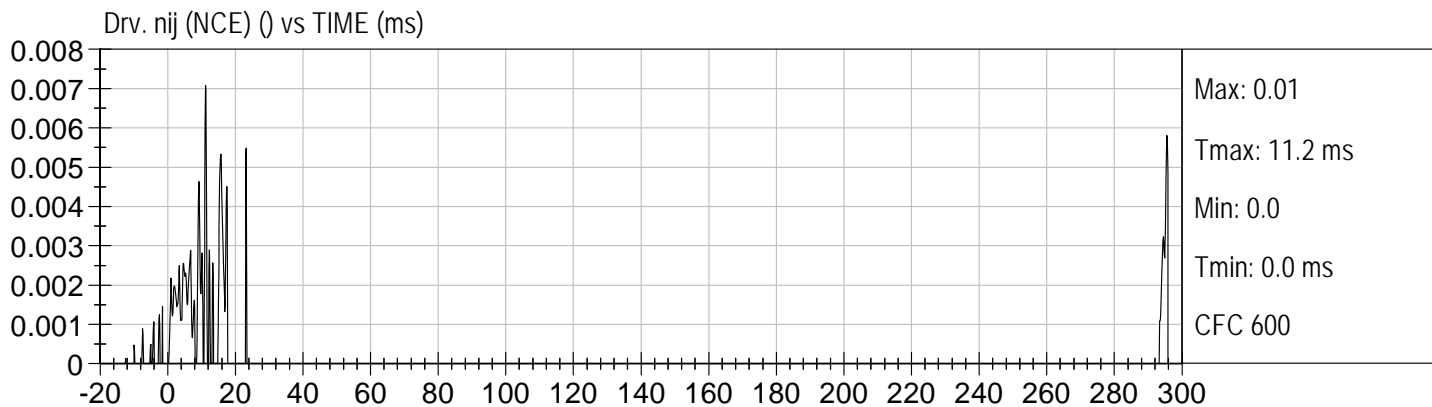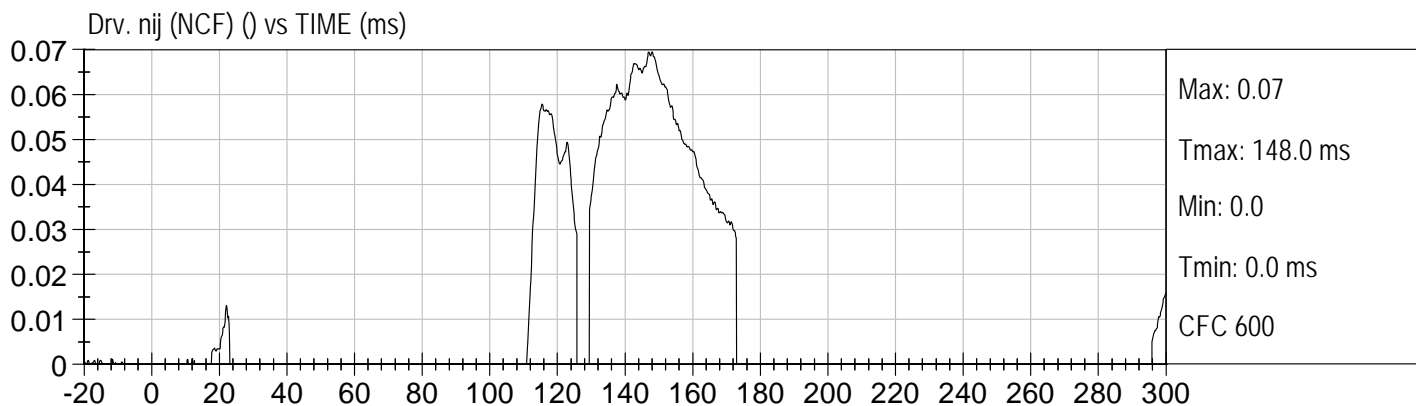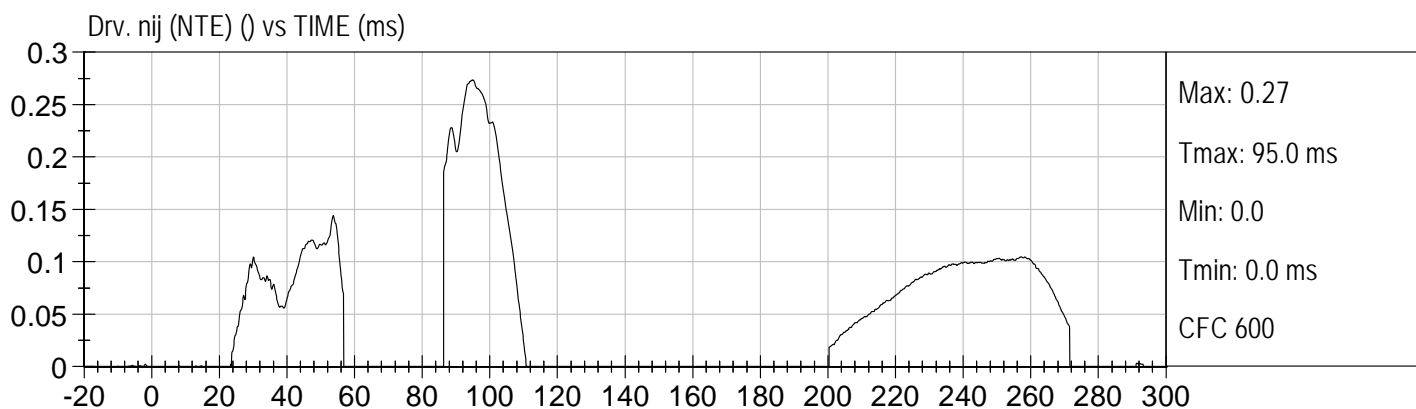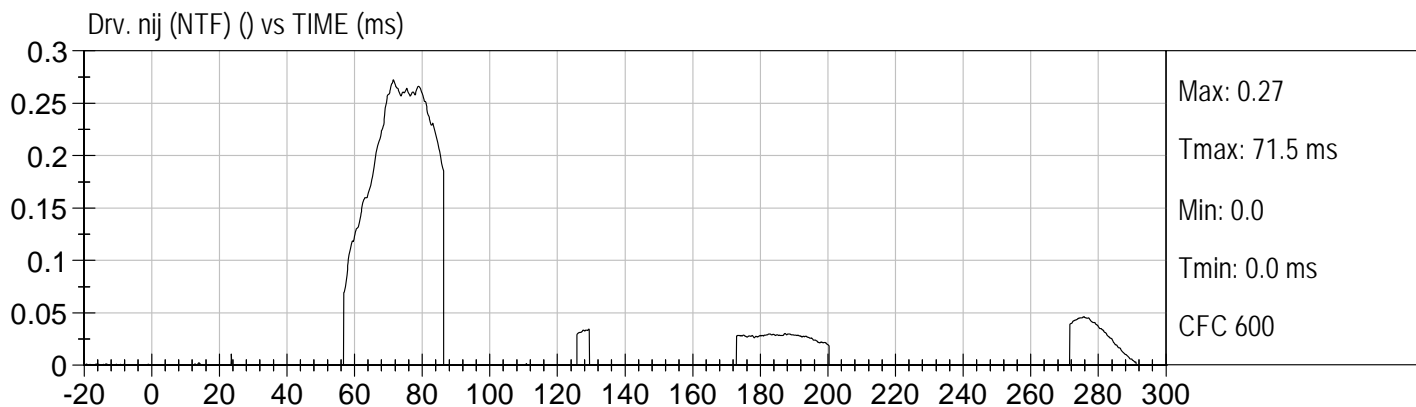

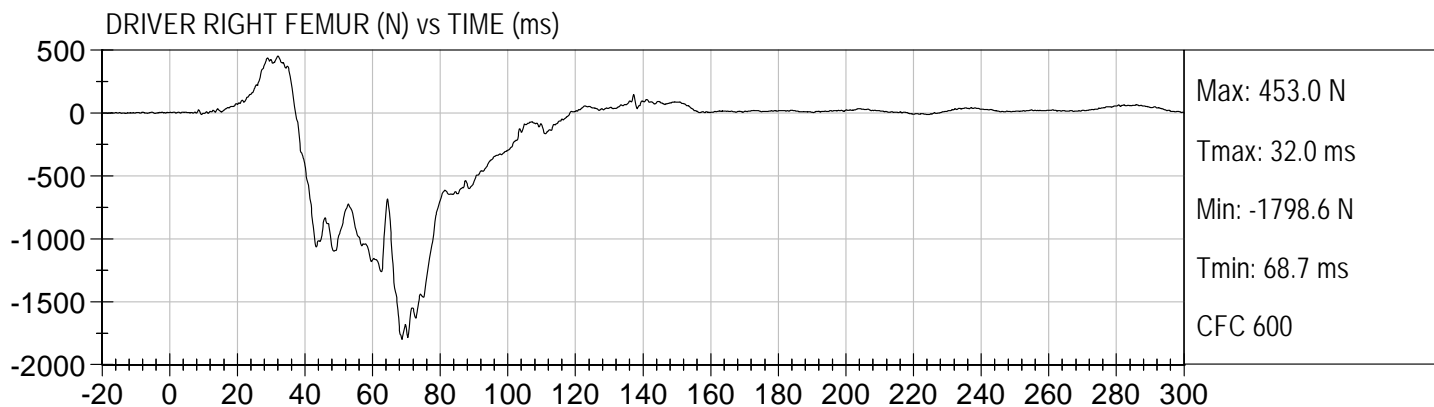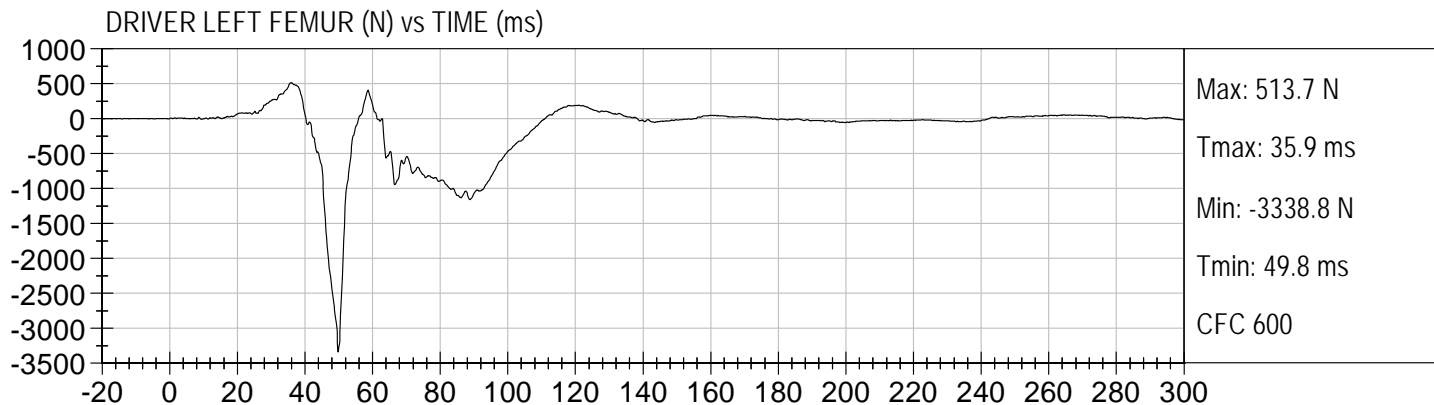





PASSENGER HEAD X (G's) vs TIME (ms)

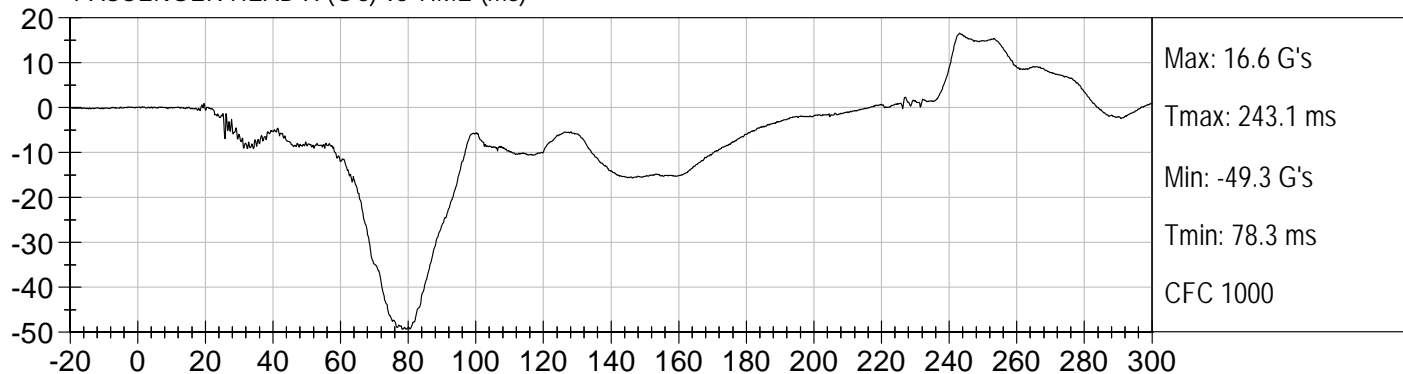


PASSENGER HEAD Y (G's) vs TIME (ms)

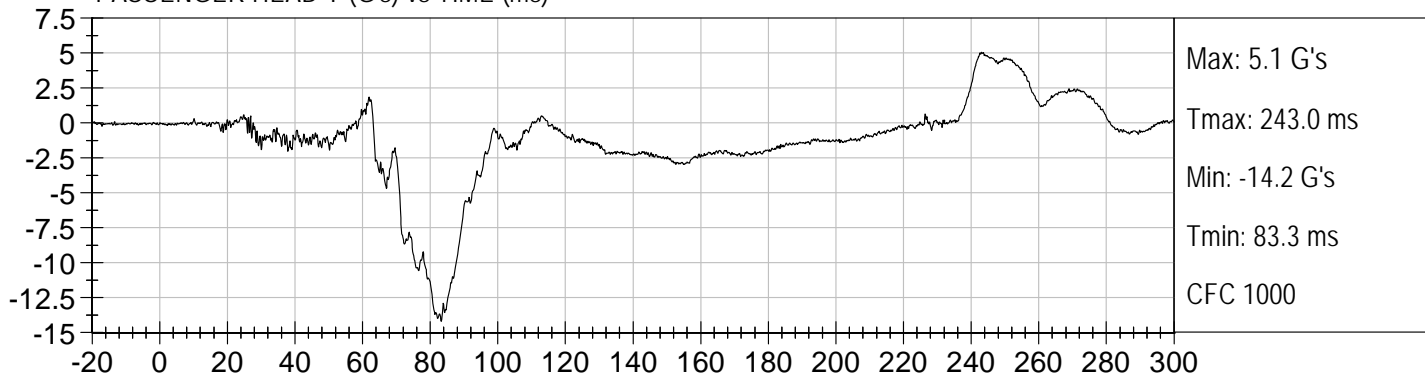






PASSENGER HEAD Z (G's) vs TIME (ms)



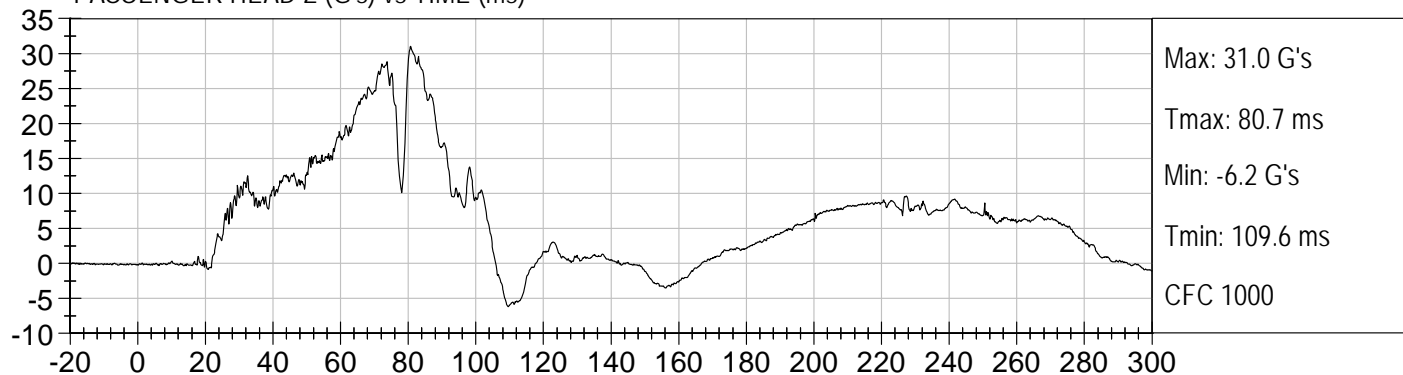






PASSENGER HEAD Resultant (G's) vs TIME (ms)


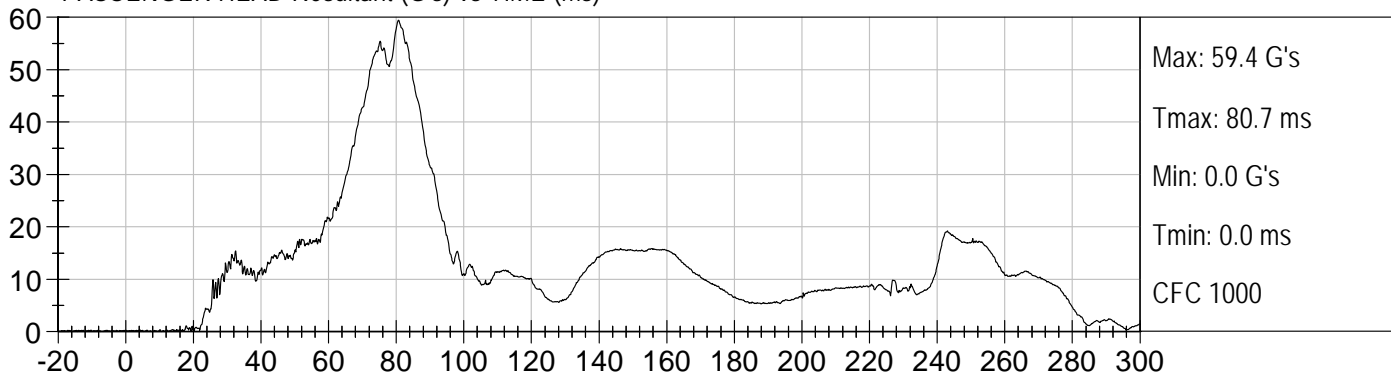


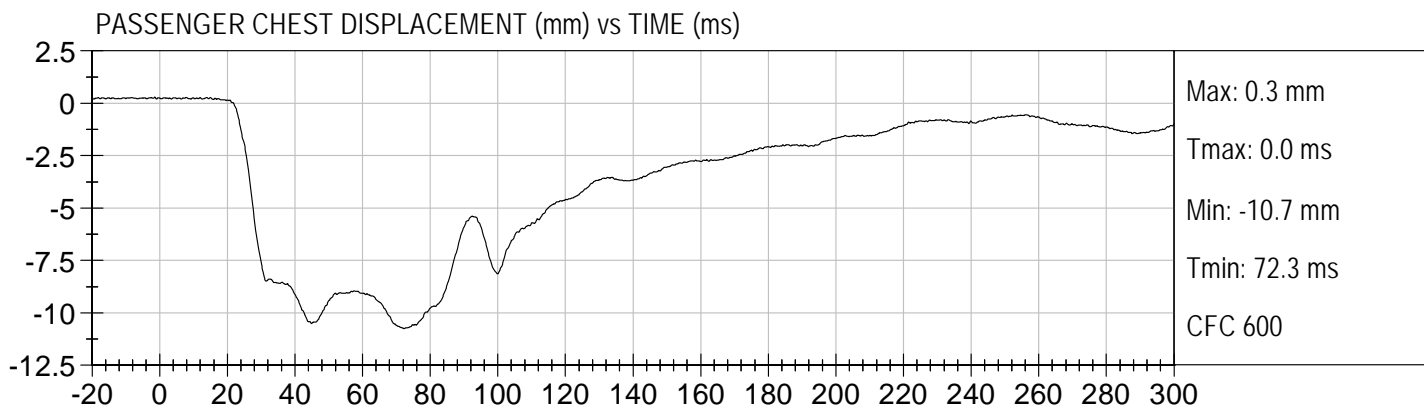

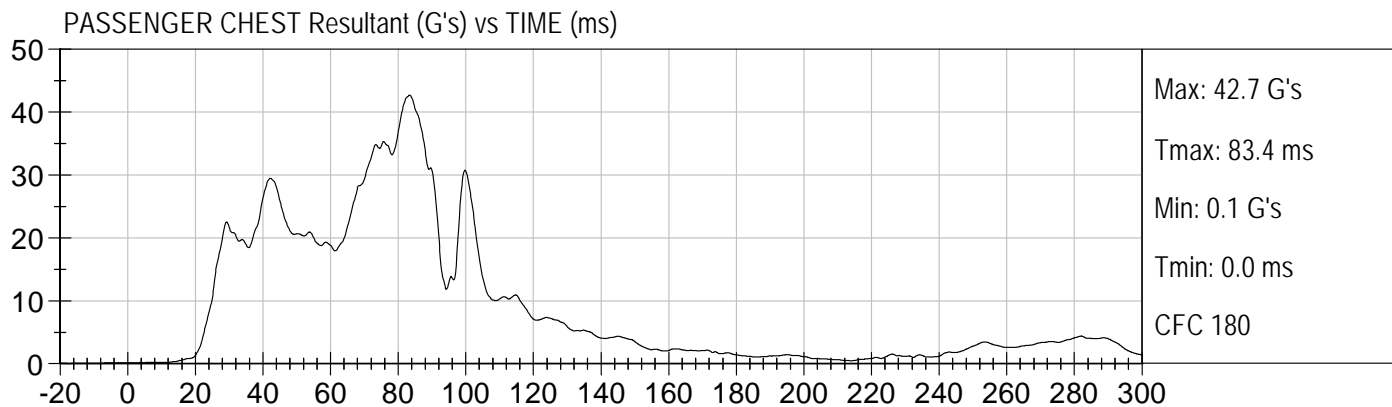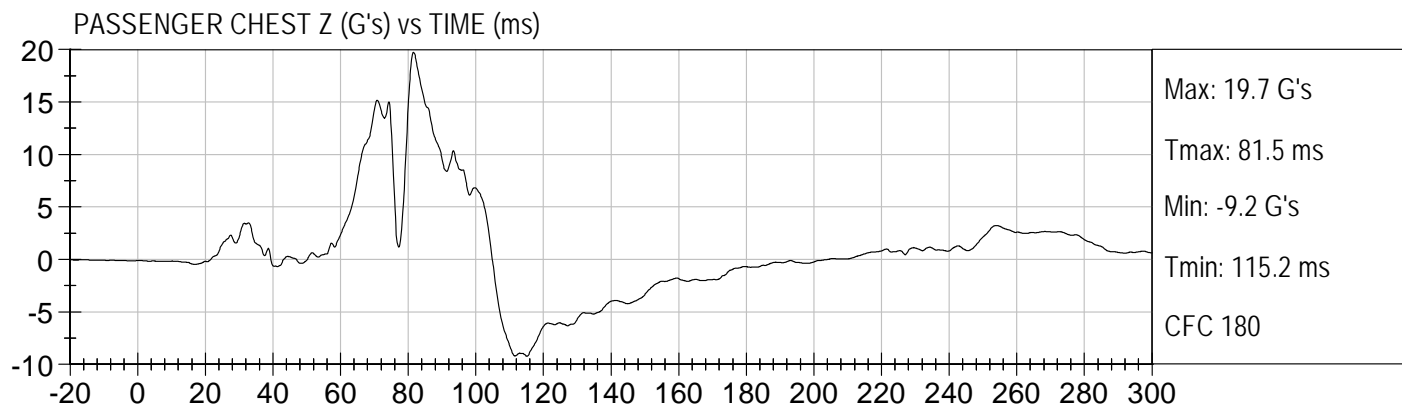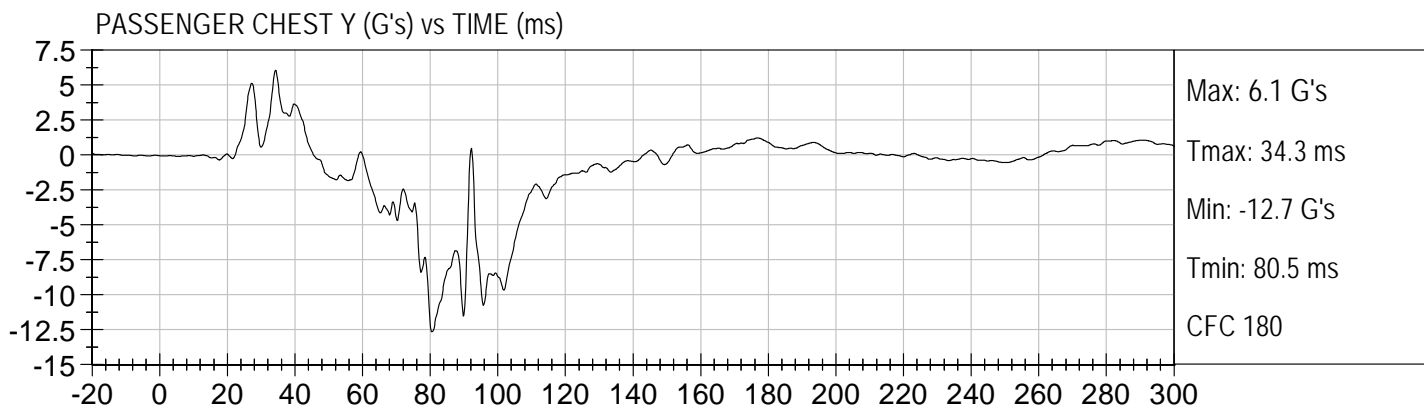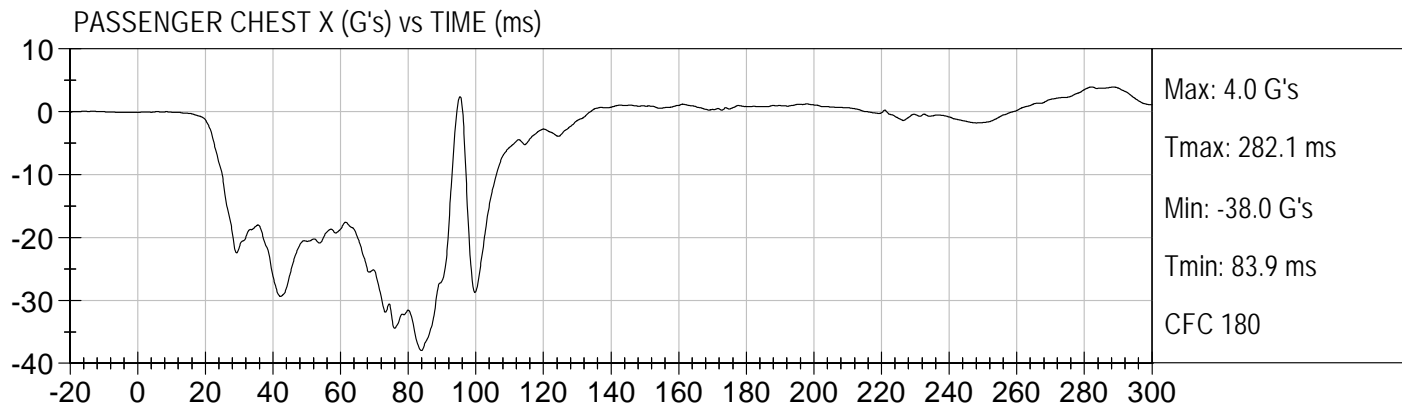

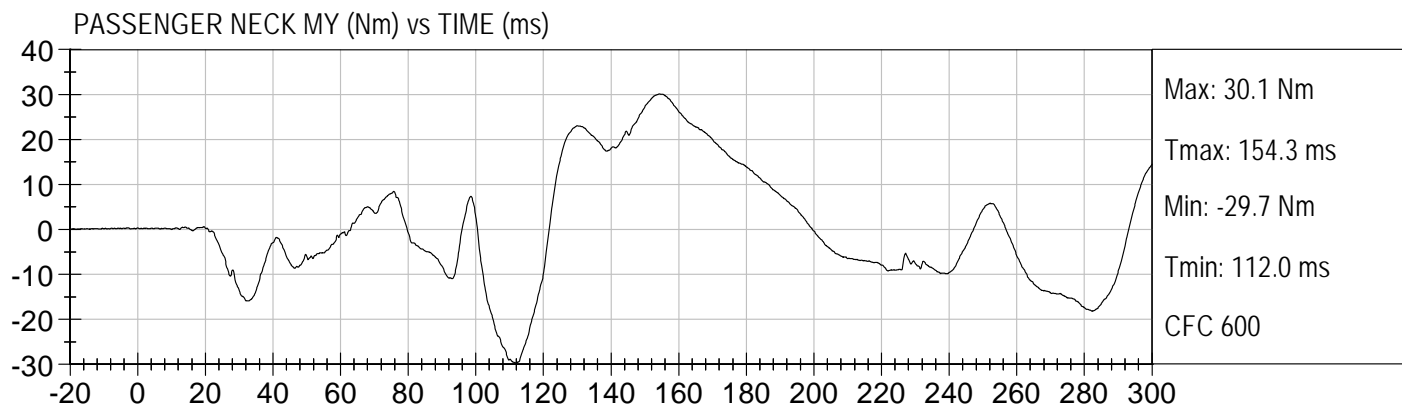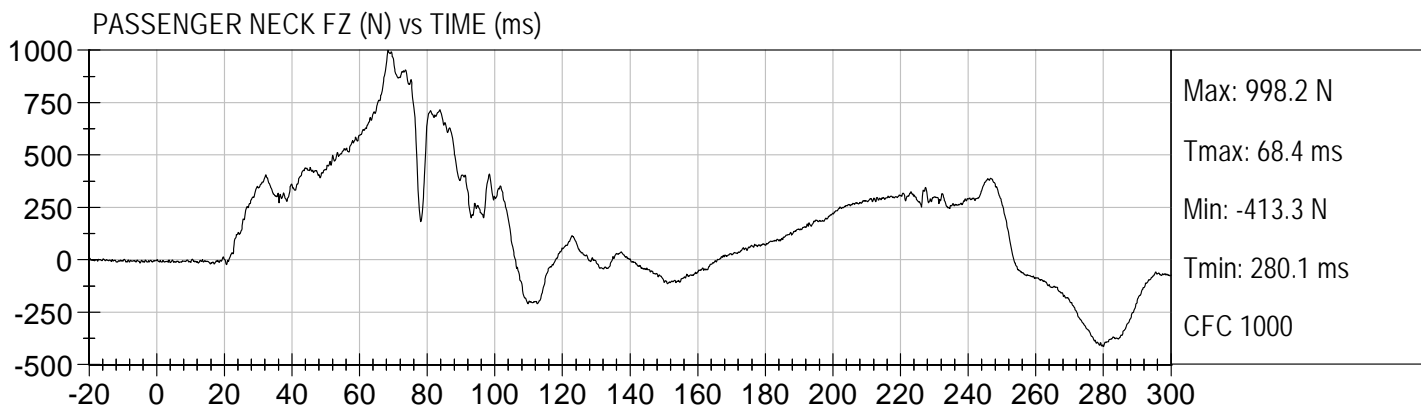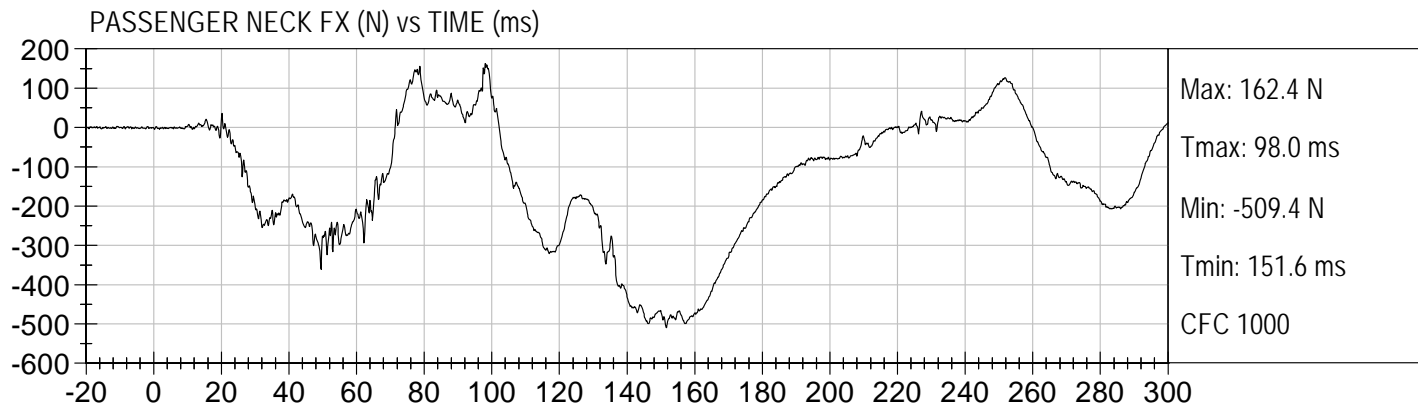

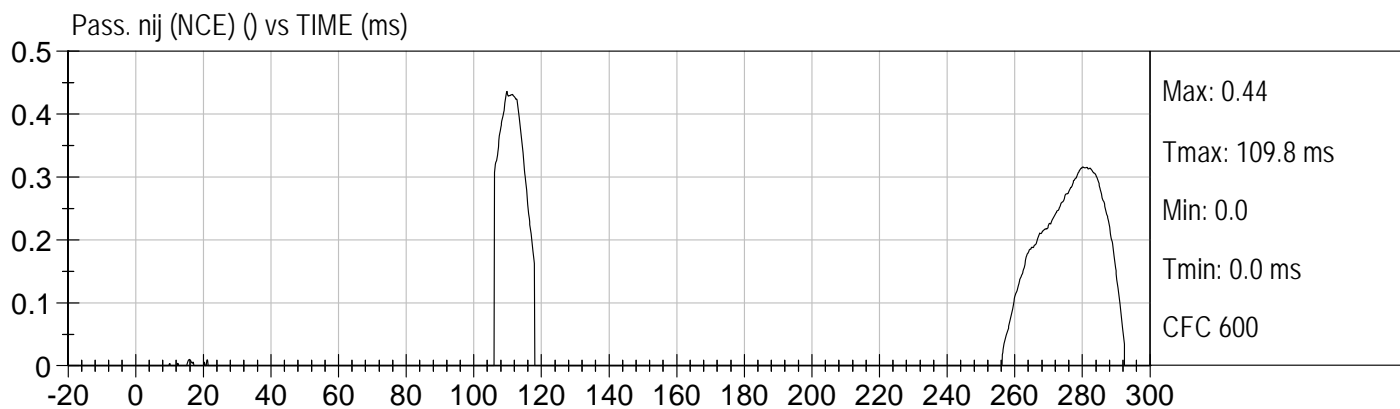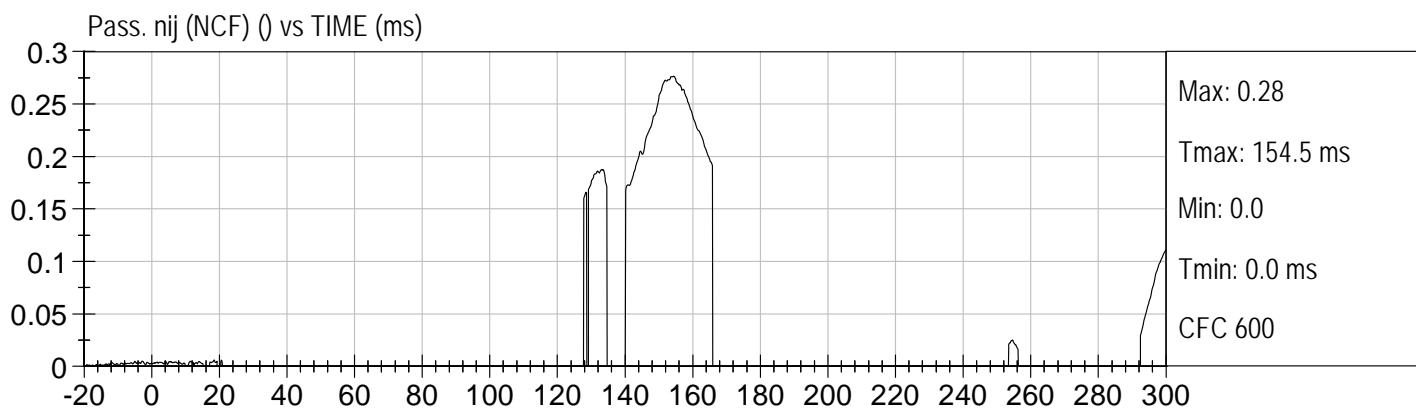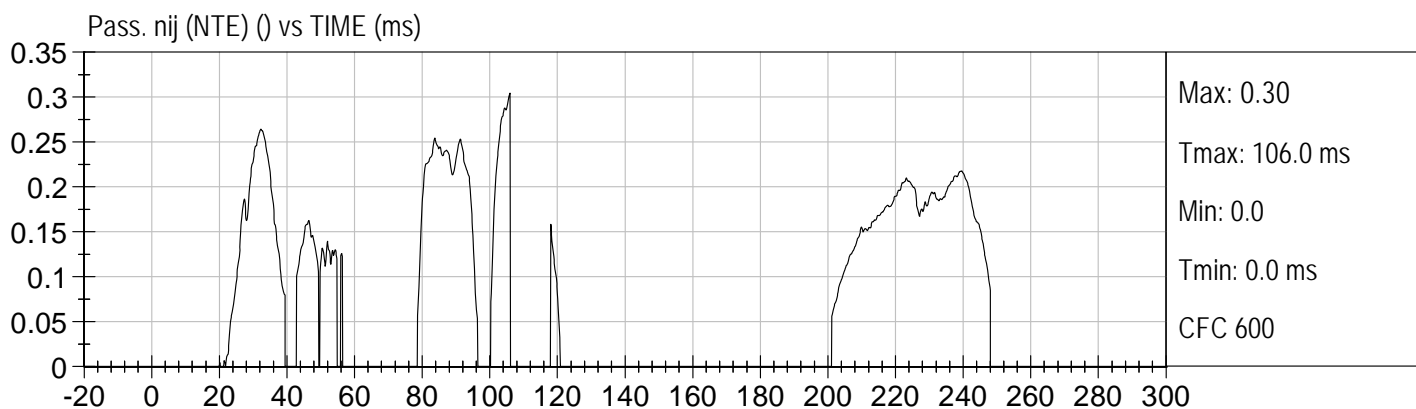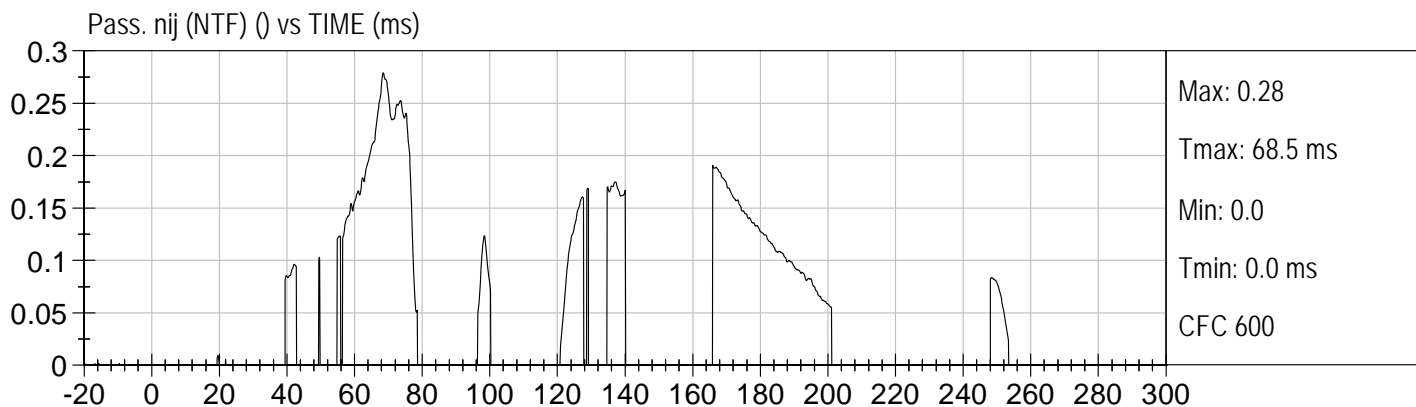

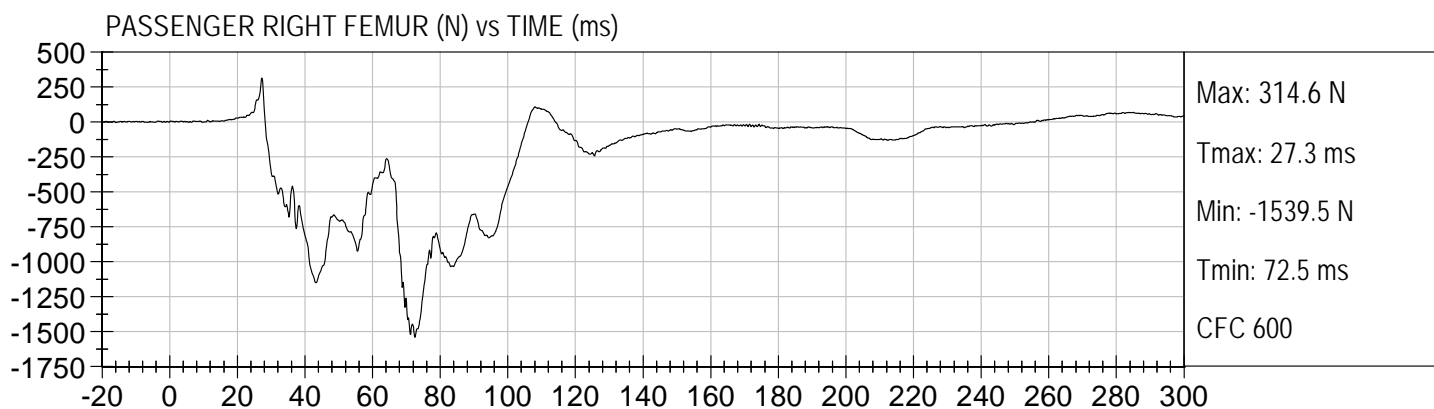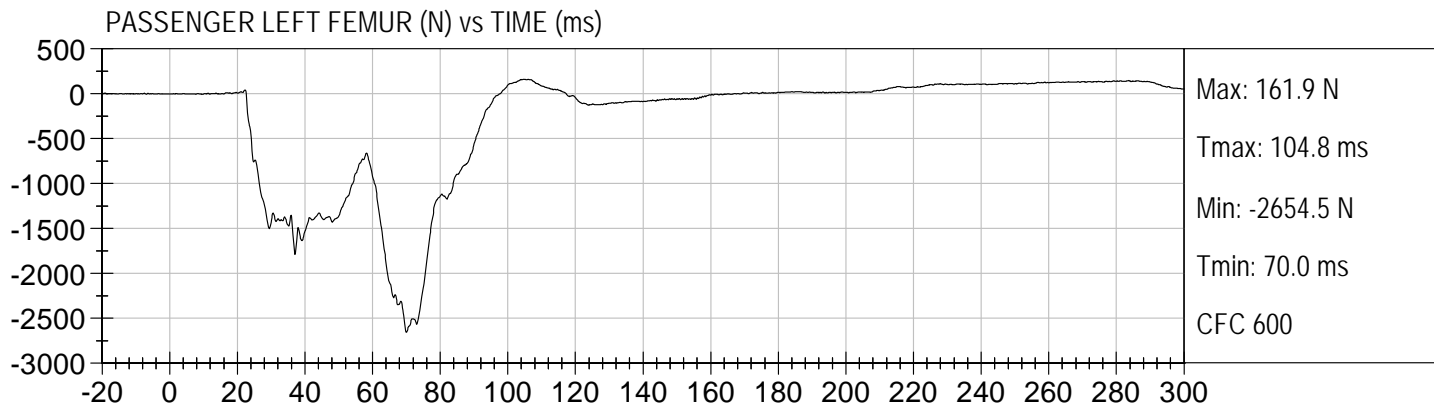

APPENDIX C

DUMMY CALIBRATION AND PERFORMANCE VERIFICATION DATA

**Hybrid III, 50th External Measurements
SN: 351**

HYBRID III, PART 572, SUBPART E EXTERNAL DIMENSIONS				
DIMENSION	DESCRIPTION	DETAILS	ASSEMBLY DIMENSION (inches)	ACTUAL MEASUREMENT
A	TOTAL SITTING HEIGHT	Seat surface to highest point on top of the head.	34.6–35.0	34.8
B	SHOULDER PIVOT HEIGHT	Centerline of shoulder pivot bolt to the seat surface.	19.9-20.5	20.0
C	H-POINT HEIGHT	Reference	3.3-3.5	3.4
D	H-POINT LOCATION FROM BACKLINE	Reference	5.3-5.5	5.5
E	SHOULDER PIVOT FROM BACKLINE	Center of the shoulder clevis to the rear vertical surface of the fixture.	3.3-3.7	3.5
F	THIGH CLEARANCE	Measured at the highest point on the upper femur segment.	5.5-6.1	6.0
G	BACK OF ELBOW TO WRIST PIVOT	back of the elbow flesh to the wrist pivot in line with the elbow and wrist pivots	11.4-12.0	11.8
H	HEAD BACK TO BACKLINE	Back of Skull cap skin to seat rear vertical surface (Reference)	1.6-1.8	1.7
I	SHOULDER TO- ELBOW LENGTH	Measure from the highest point on top of the shoulder clevis to the lowest part of the flesh on the elbow in line with the elbow pivot bolt.	13.0-13.6	13.3
J	ELBOW REST HEIGHT	Measure from the flesh below the elbow pivot bolt to the seat surface.	7.5-8.3	7.8
K	BUTTOCK TO KNEE LENGTH	The forward most part of the knee flesh to the rear vertical surface of the fixture.	22.8-23.8	23.8
L	POPLITEAL HEIGHT	Seat surface to the plane of the horizontal plane of the bottom of the feet.	16.9-17.9	17.0
M	KNEE PIVOT HEIGHT	Centerline of knee pivot bolt to the horizontal plane of the bottom of the feet.	19.1-19.7	19.5
N	BUTTOCK POPLITEAL LENGTH	The rearmost surface of the lower leg to the same point on the rear surface of the buttocks used for dim. "K".	17.8-18.8	18.8

HYBRID III, SUBPART E EXTERIOR DIMENSIONS, continued

DIMENSION	DESCRIPTION	DETAILS		ACTUAL MEASUREMENT
O	CHEST DEPTH WITHOUT JACKET	Measured 16.9-17.1 in. above seat surface	8.4-9.0	8.5
P	FOOT LENGTH	Tip of toe to rear of heel	9.9-10.5	10.3
V	SHOULDER BREADTH	Outside edges of right and left shoulder clevises	16.3-17.2	16.5
W	FOOT BREADTH	The widest part of the foot	3.6-4.2	4.0
Y	CHEST CIRCUMFERENCE (WITH CHEST JACKET)	Measured 16.9-17.1 in. above seat surface	38.2-39.4	39.2
Z	WAIST CIRCUMFERENCE	Measured 8.9-9.1 in. above seat surface	32.9-34.1	33.7
AA	REFERENCE LOCATION FOR MEASUREMENT OF CHEST CIRCUMFERENCE	Reference	16.9-17.1	17.0
BB	REFERENCE LOCATION FOR MEASUREMENT OF WAIST CIRCUMFERENCE	Reference	8.9-9.1	9.0

NOTE: THE H-POINT IS LOCATED 1.83 INCHES FORWARD AND 2.57 INCHES DOWN FROM THE CENTER OF THE PELVIS ANGLE REFERENCE HOLE.

**MGA RESEARCH CORPORATION
HEAD DROP TEST
HYBRID III 50TH PERCENTILE MALE**

ATD Serial No: 351

Test ID: D113881

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 - 25.6	21.8	Pass
Laboratory Relative Humidity	%	10 to 70	25	Pass
Peak Resultant Acceleration	G's	225 - 275	272	Pass
Peak Lateral Acceleration	G's	<= +/- 15.0	4.8	Pass
Unimodal	N/A	Yes	Yes	Pass
Oscillations	N/A	within 10% of peak	Yes	Pass
Overall Test Results				Pass

Jessica Gall
Laboratory Technician



11/21/11
Test Date

David Winkelbauer
Approved By



Test Desc: Head Drop
Component ID: D113881

Test Date: 11/21/11
Velocity: 0 ft/s, 0.00 m/s

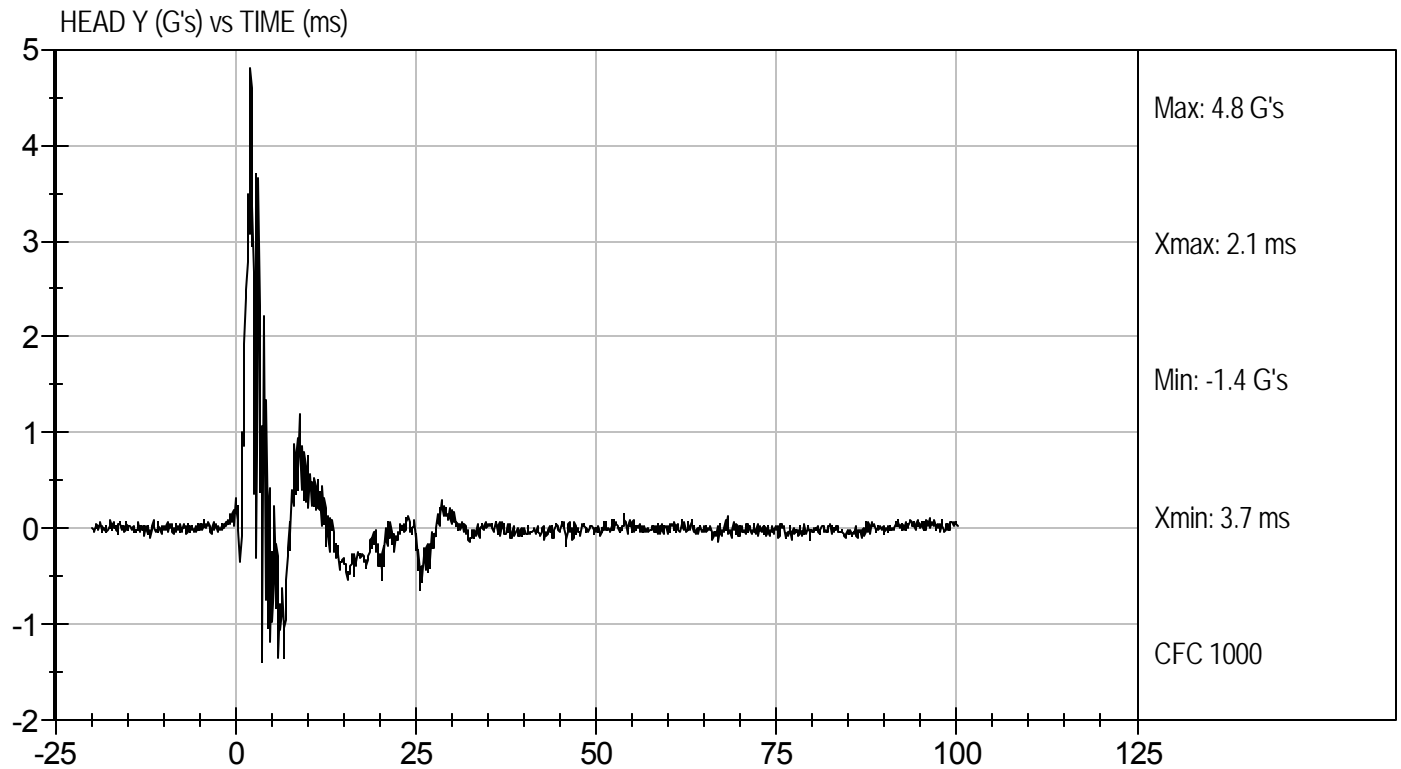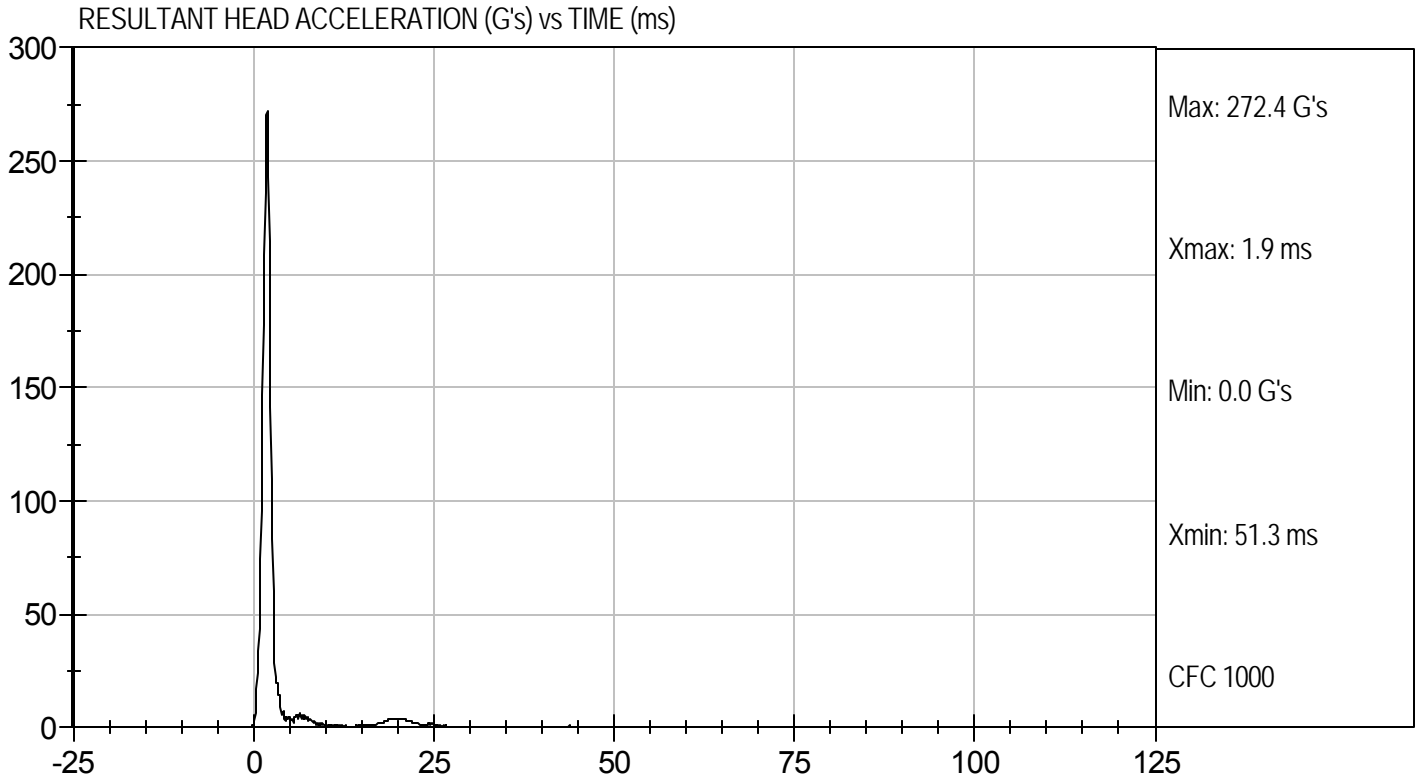

**MGA RESEARCH CORPORATION
NECK FLEXION TEST
HYBRID III 50TH PERCENTILE MALE**

ATD Serial No: 351

Test I.D.: D113882

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.8	Pass
Laboratory Relative Humidity		%	10 to 70	26	Pass
Pendulum Velocity		m/s	6.89 to 7.13	7.06	Pass
Pendulum Deceleration	10 ms	G's	22.50 to 27.50	22.91	Pass
	20 ms	G's	17.60 to 22.60	20.08	Pass
	30 ms	G's	12.50 to 18.50	14.65	Pass
Peak Pendulum Deceleration After 30 ms		G's	<= 29.0	14.6	Pass
Deceleration Decay Time to Cross 5 G's		ms	34.0 to 42.0	35.8	Pass
Maximum "D" Plane Rotation	Maximum	Degrees	64.0 to 78.0	68.1	Pass
	Time	ms	57.0 to 64.0	57.8	Pass
"D" Plane Rotation Decay Time To Zero Crossing		ms	113.0 to 128.0	113.3	Pass
Moment About Occipital Condyle	Maximum	N m	88.1 to 108.5	93.7	Pass
	Time	ms	47.0 to 58.0	48.7	Pass
Positive Moment Decay Time To Zero Crossing		ms	97.0 to 107.0	97.5	Pass
Overall Test Results					Pass

Jessica Hall
Laboratory Technician



11/21/11
Test Date

David Winkelbauer
Approved By



Test Desc: Neck Flexion
Component ID: D113882


Test Date: 11/21/11
Velocity: 23.15 ft/s, 7.06 m/s

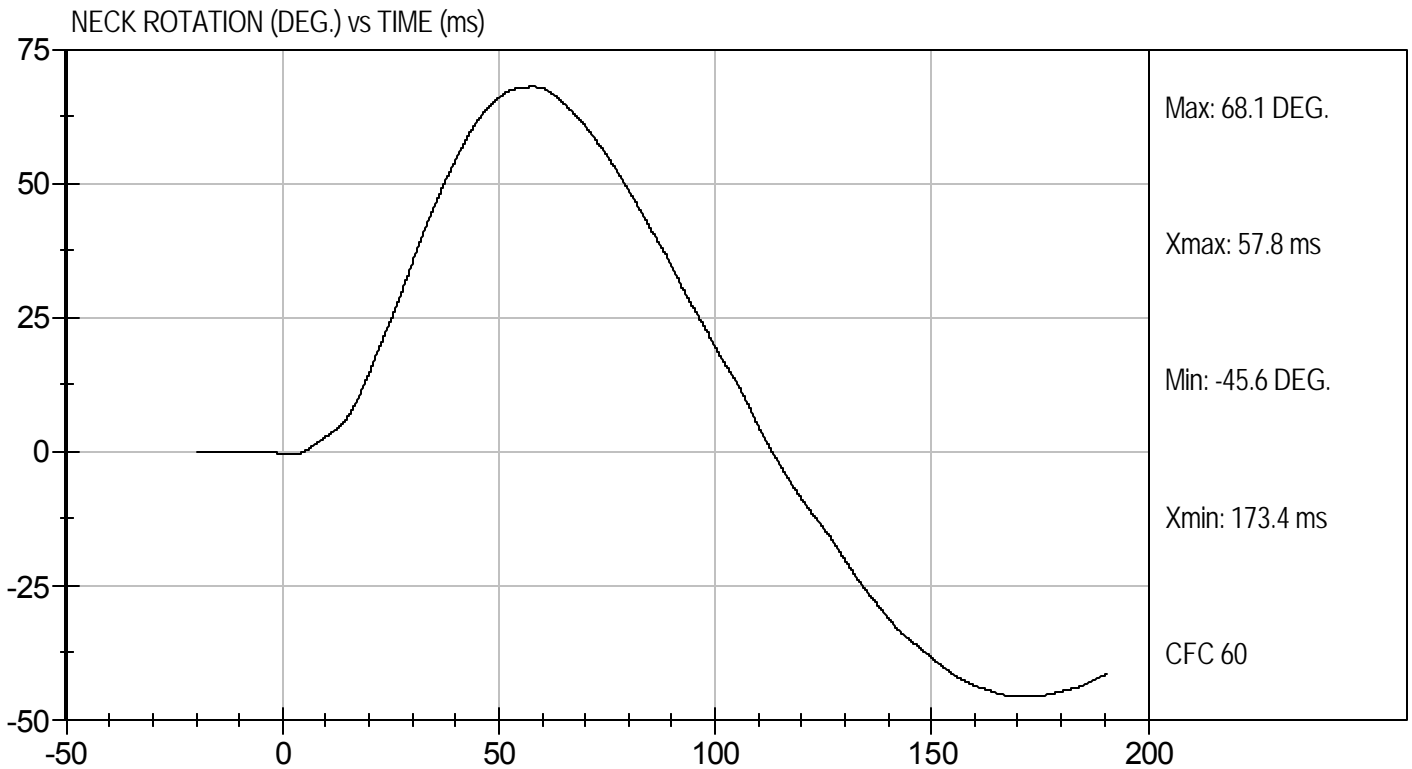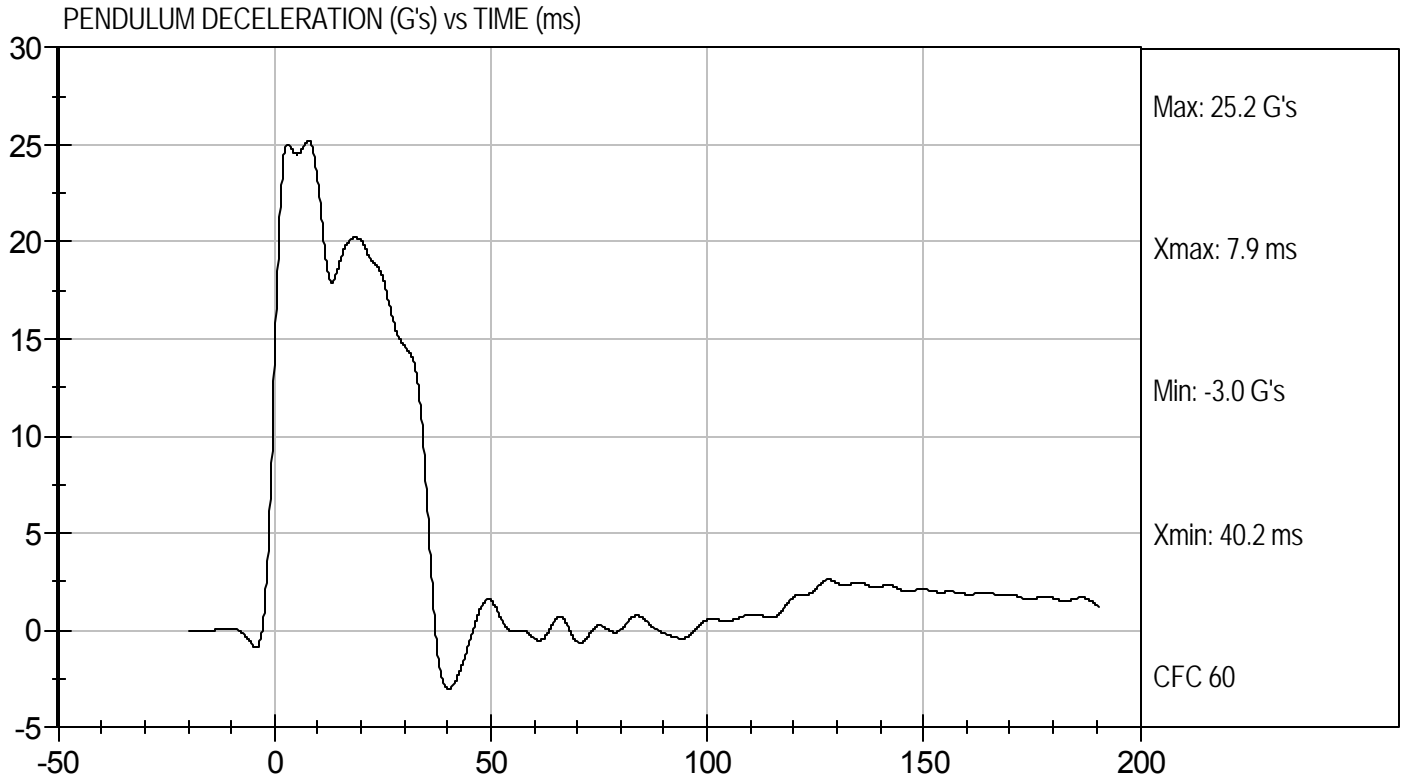



Test Desc: Neck Flexion
Component ID: D113882

Test Date: 11/21/11
Velocity: 23.15 ft/s, 7.06 m/s

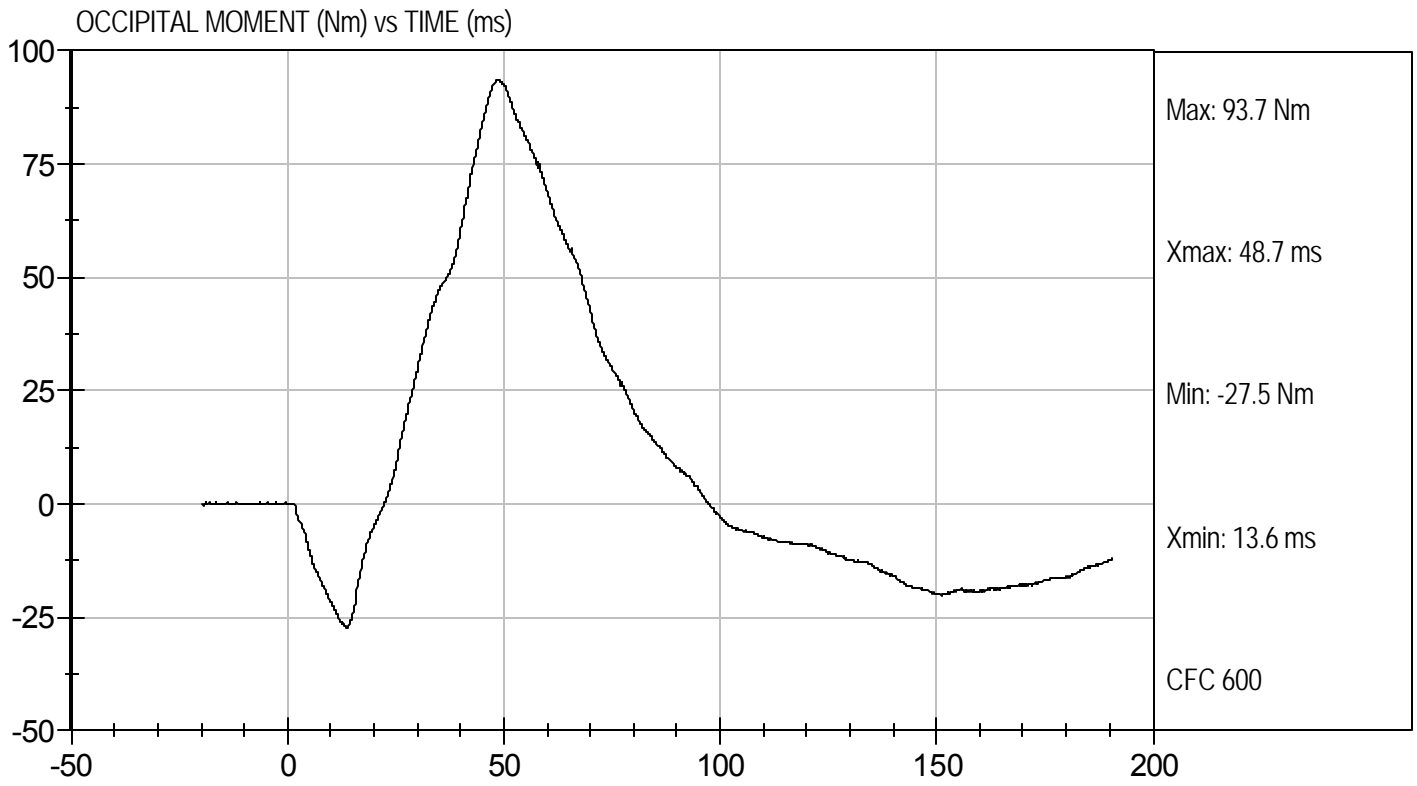

**MGA RESEARCH CORPORATION
NECK EXTENSION TEST
HYBRID III 50TH PERCENTILE MALE**

ATD Serial No: 351



Test I.D.: D113883

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.8	Pass
Laboratory Relative Humidity		%	10 to 70	26	Pass
Pendulum Velocity		m/s	5.95 to 6.19	6.12	Pass
Pendulum Deceleration	10 ms	G's	17.20 to 21.20	18.54	Pass
	20 ms	G's	14.00 to 19.00	15.72	Pass
	30 ms	G's	11.00 to 16.00	11.95	Pass
Peak Pendulum Deceleration After 30 ms		G's	<= 22.0	11.8	Pass
Deceleration Decay Time to Cross 5 G's		ms	38.0 to 46.0	45.5	Pass
Maximum "D" Plane Rotation	Maximum	Degrees	81.0 to 106.0	94.1	Pass
	Time	ms	72.0 to 82.0	79.3	Pass
"D" Plane Rotation Decay Time To Zero Crossing		ms	147.0 to 174.0	159.2	Pass
Moment About Occipital Condyle	Maximum	Nm	-52.9 to -79.9	-56.0	Pass
	Time	ms	65.0 to 79.0	73.8	Pass
Negative Moment Decay Time To Zero Crossing		ms	120.0 to 148.0	146.3	Pass
Overall Test Results					Pass

Jessica Gall
Laboratory Technician

11/21/11
Test Date


David Winkelbauer
Approved By

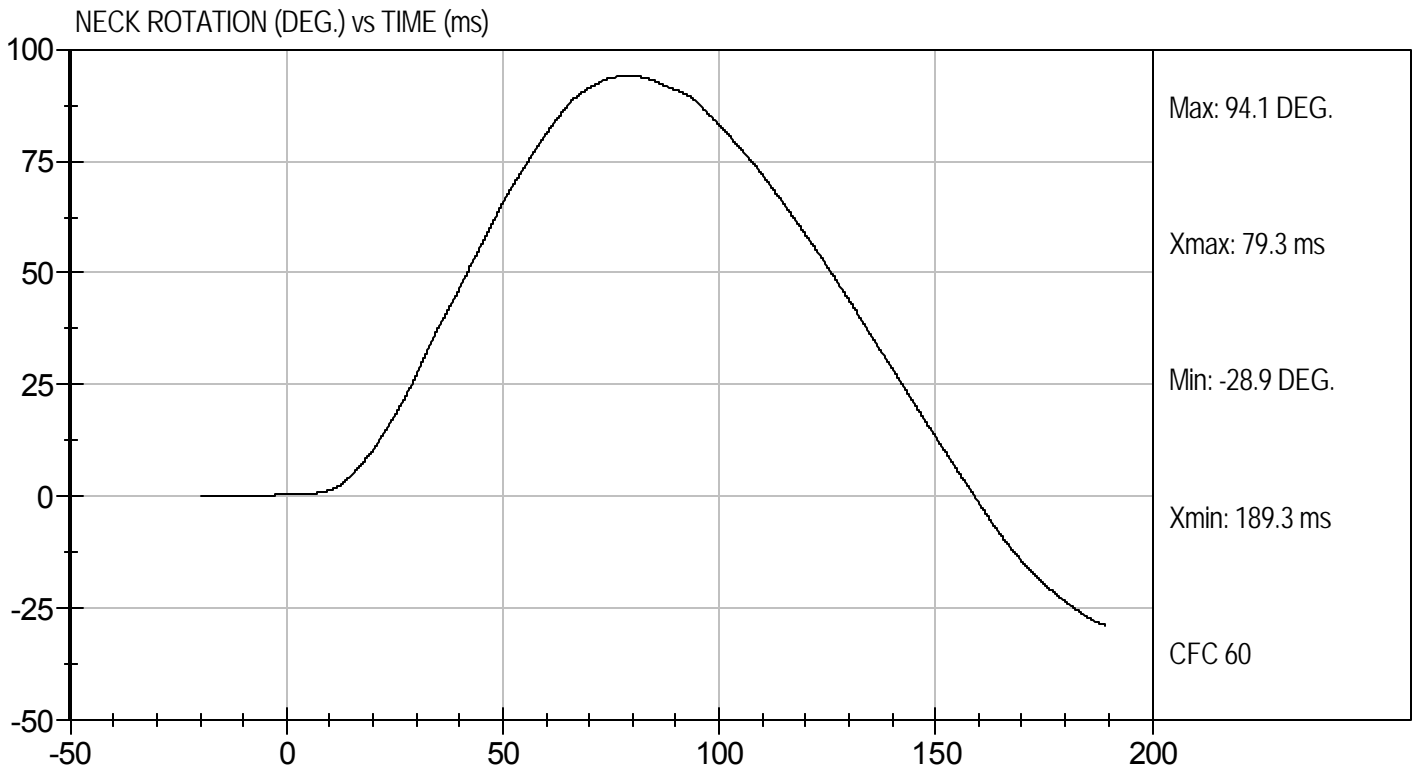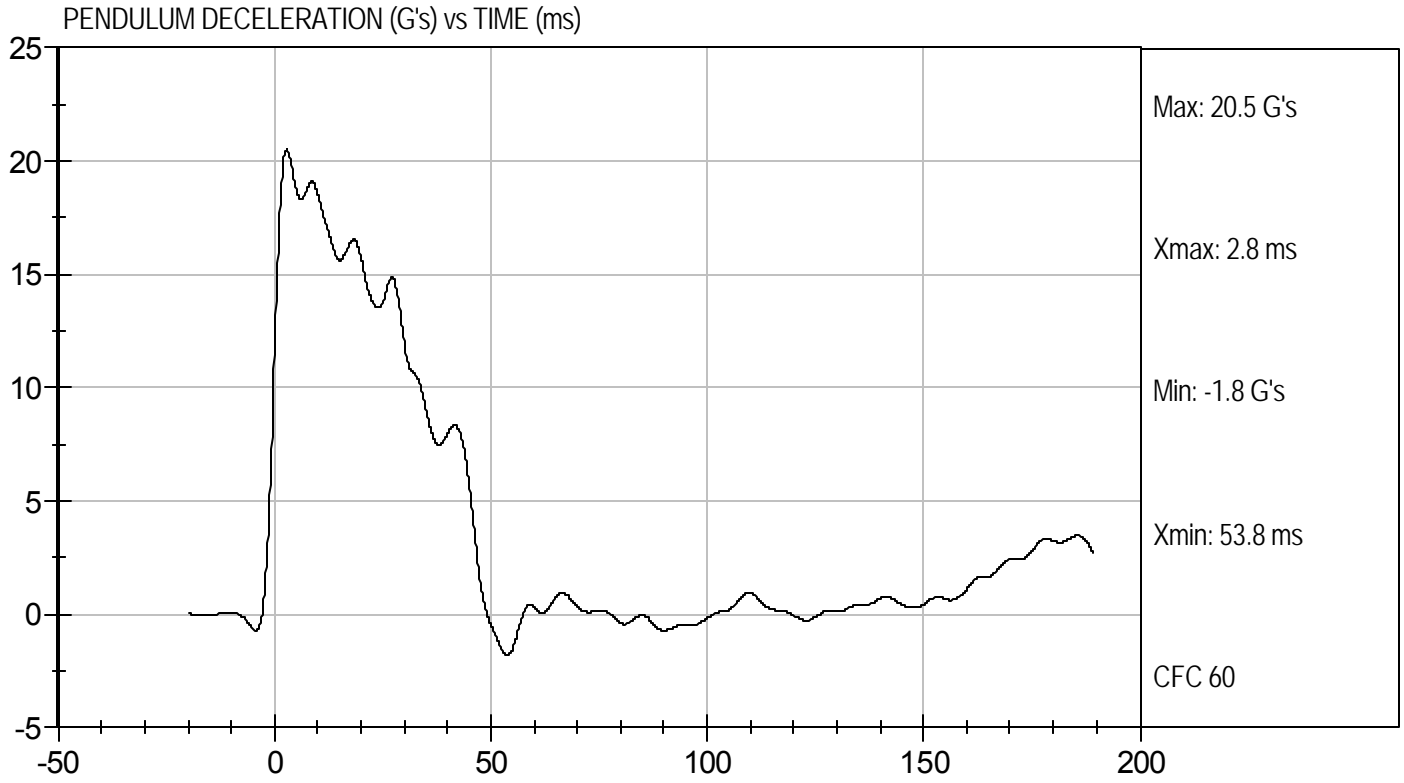



Test Desc: Neck Extension
Component ID: D113883

Test Date: 11/21/11
Velocity: 20.08 ft/s, 6.12 m/s

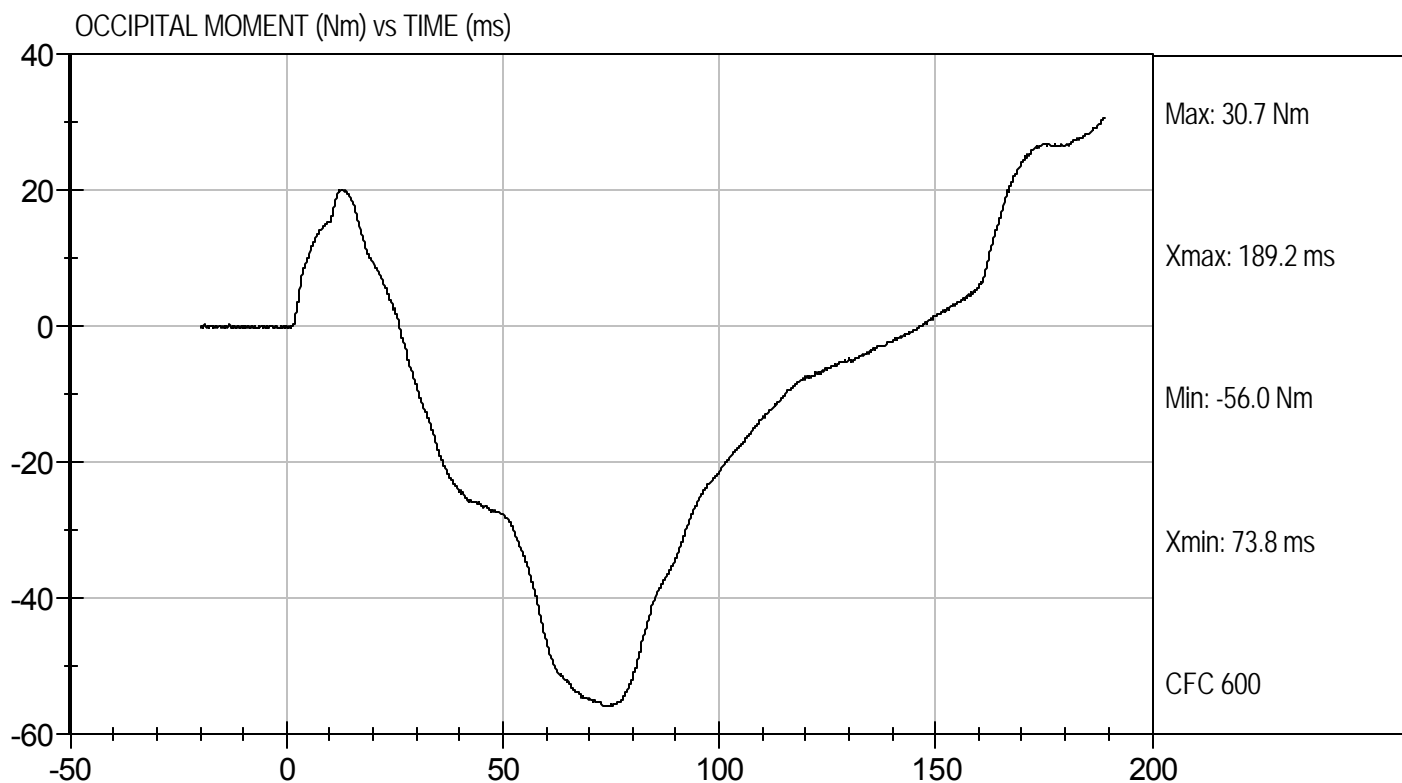

**MGA RESEARCH CORPORATION
THORAX IMPACT
HYBRID III 50TH PERCENTILE MALE**

ATD Serial No: 351

Test I.D: D113884

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	20.6 to 22.2	21.6	Pass
Laboratory Relative Humidity	%	10 to 70	25	Pass
Probe Velocity	m/s	6.58 to 6.82	6.77	Pass
Peak Probe Force	N	5159 to 5893	5,189	Pass
Peak Sternum Displacement	cm	6.35 to 7.26	6.71	Pass
Internal Hysteresis	%	69 to 85	72	Pass
Overall Test Results				Pass

Jessica Gall
Laboratory Technician


11/21/11
Test Date

David Winkelbauer
Approved By



Test Desc: Thorax Impact
Component ID: D113884

Test Date: 11/21/11
Velocity: 22.22 ft/s, 6.77 m/s

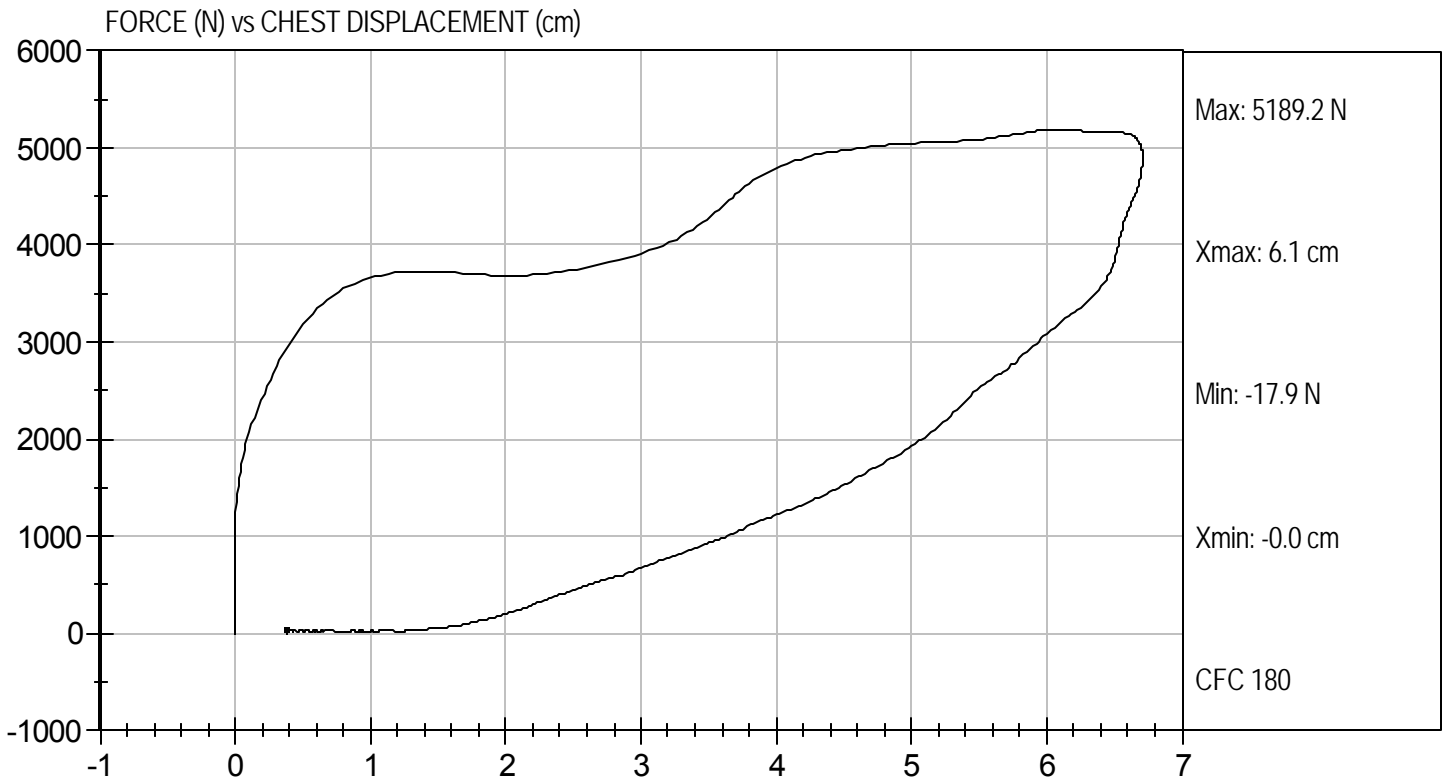

**MGA RESEARCH CORPORATION
RIGHT KNEE IMPACT TEST
HYBRID III 50TH PERCENTILE MALE**

ATD Serial No: 351

Test I.D: D113885

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.5	21.8	Pass
Laboratory Relative Humidity	%	10 to 70	26	Pass
Probe Velocity	m/s	2.07 to 2.13	2.10	Pass
Peak Probe Force	Newtons	4715 to 5782	5,431	Pass
Overall Test Results				Pass

Jessica Hall
Laboratory Technician


11/21/11
Test Date

David Winkelbauer
Approved By



Test Desc: Right Knee
Component ID: D113885

Test Date: 11/21/11
Velocity: 6.88 ft/s, 2.10 m/s

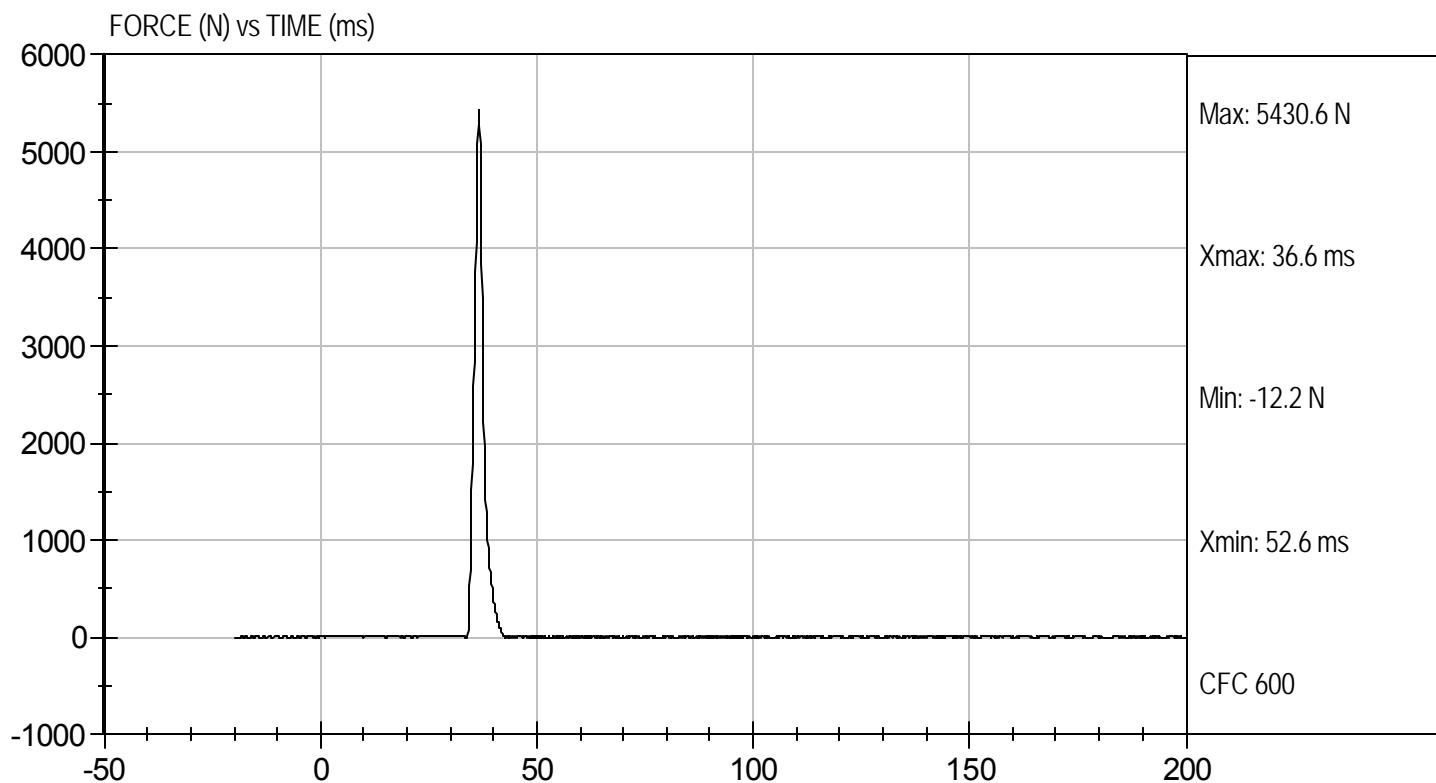


MGA RESEARCH CORPORATION
LEFT KNEE IMPACT TEST
HYBRID III 50TH PERCENTILE MALE

ATD Serial No: 351

Test I.D: D113886


Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.5	21.8	Pass
Laboratory Relative Humidity	%	10 to 70	26	Pass
Probe Velocity	m/s	2.07 to 2.13	2.11	Pass
Peak Probe Force	Newtons	4715 to 5782	5,206	Pass
Overall Test Results				Pass



Laboratory Technician

11/21/11

Test Date




Approved By



Test Desc: Left Knee
Component ID: D113886

Test Date: 11/21/11
Velocity: 6.91 ft/s, 2.11 m/s

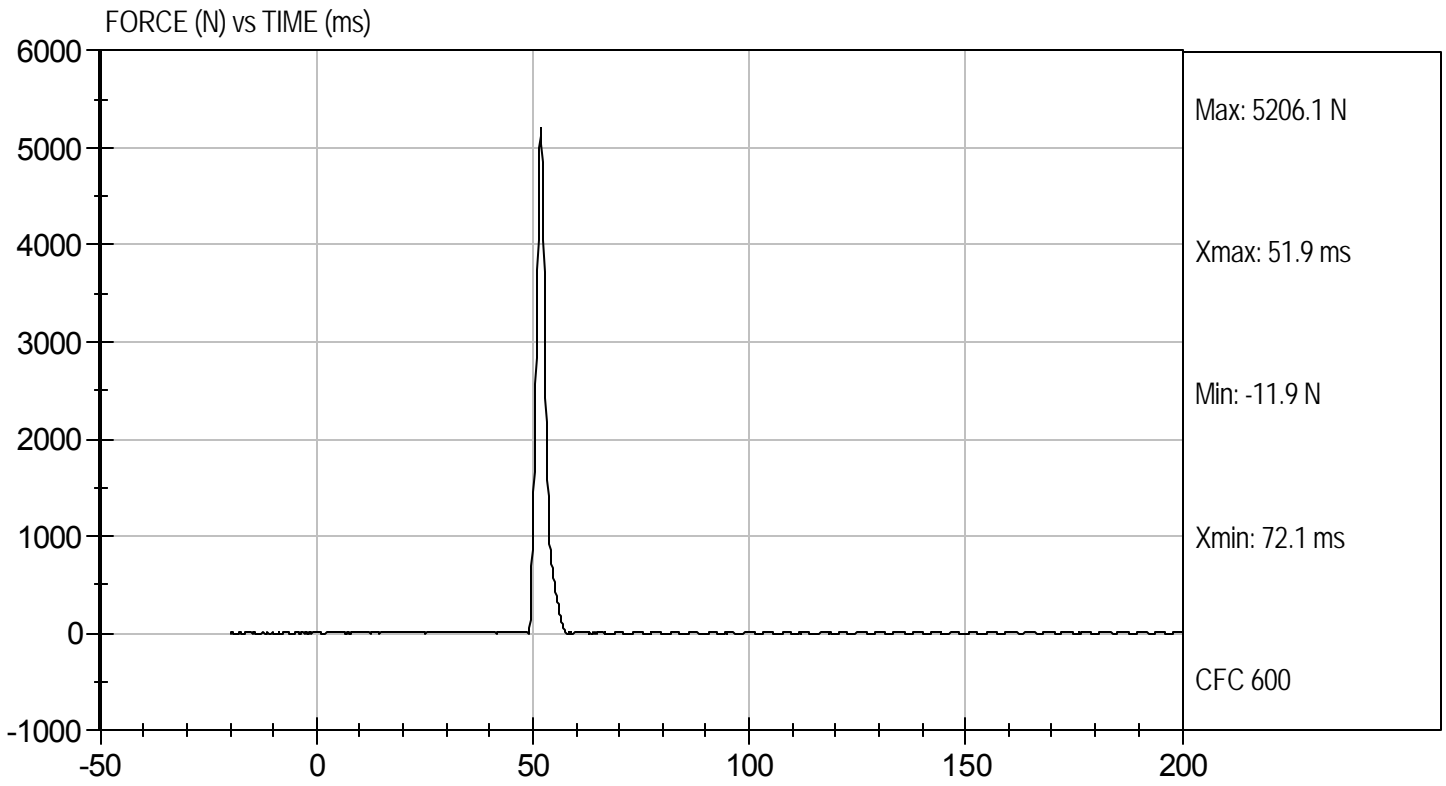

MGA RESEARCH CORPORATION
HIP-FEMUR FLEXION TEST
HYBRID III 50TH PERCENTILE MALE

ATD Serial No: 351

Test I.D: D113880

Tested Parameter	Units	Specification	Result		Pass/Fail
			Right	Left	
Laboratory Temperature	deg C	18.9 to 25.6	21.8	21.8	Pass
Laboratory Relative Humidity	%	10 to 70	26	26	Pass
Rotation Rate	deg/s	5.0 -10.0	5.7	5.7	Pass
30 Degrees	Nm	94.9 Nm Max	71.2	66.9	Pass
150 ft-lbf / 203.4 Nm	Deg	40.0 - 50.0 Degree Max Rotation	41.7	41.6	Pass
Overall Test Results					Pass

Jessica Hall
 Laboratory Technician


11/21/11
 Test Date

David Winkelbauer
 Approved By



Test Desc: Hip Femur Flexion
Component ID: D113889


Test Date: 11/21/11
Velocity: 0 ft/s, 0.00 m/s

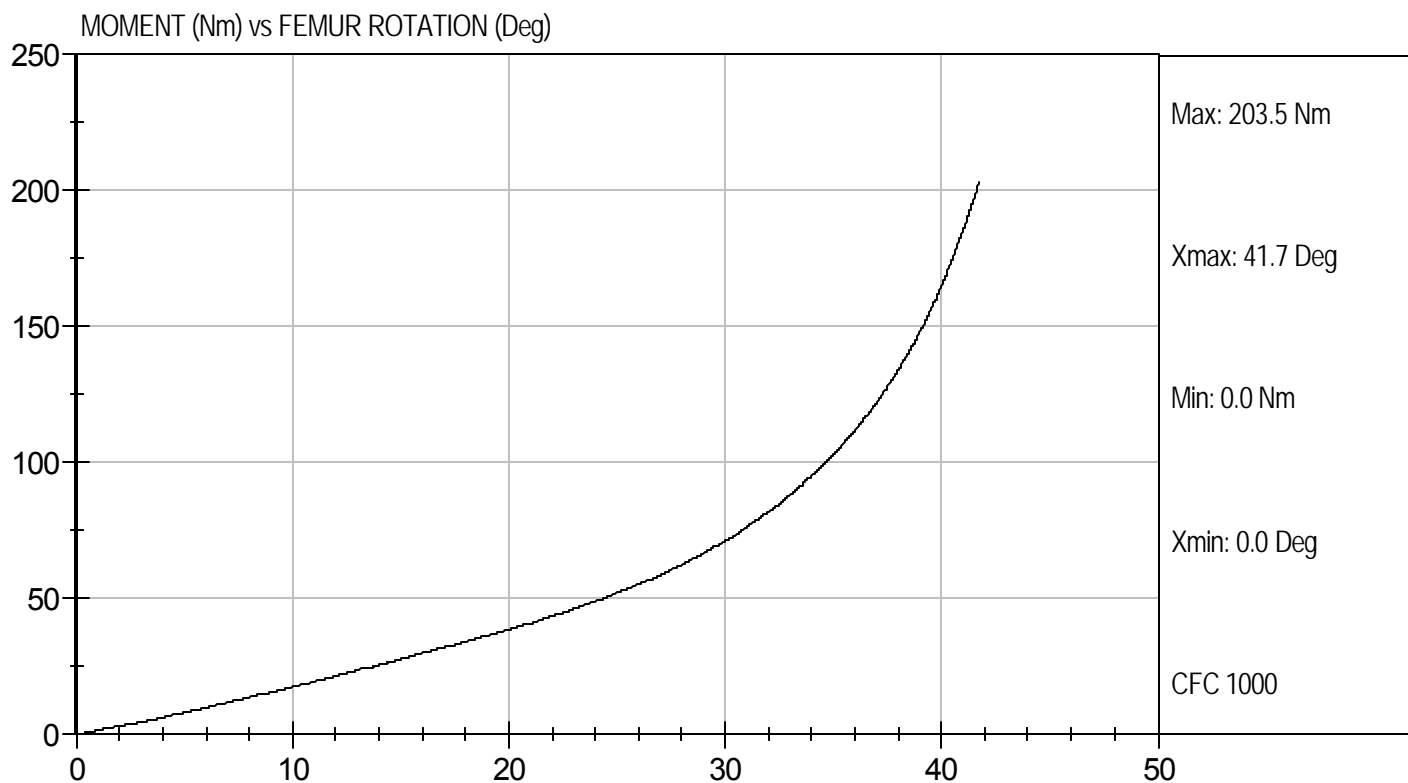



Test Desc: Hip Femur Flexion
Component ID: D113880

Test Date: 11/21/11
Velocity: 0 ft/s, 0.00 m/s

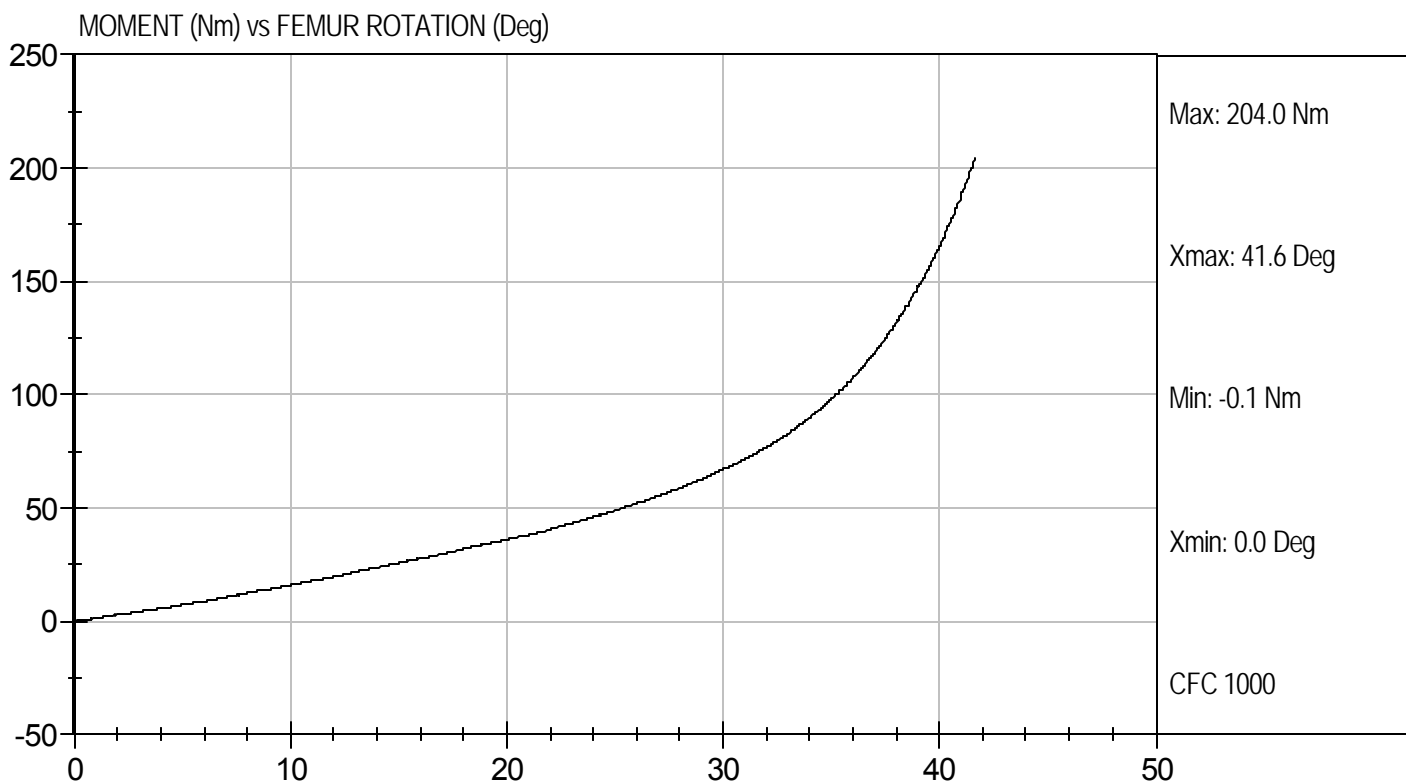

**MGA RESEARCH CORPORATION
HEAD DROP TEST
HYBRID III 50TH PERCENTILE MALE**

ATD Serial No: 351

Test ID: D113911

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 - 25.6	22.0	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Peak Resultant Acceleration	G's	225 - 275	260	Pass
Peak Lateral Acceleration	G's	<= +/- 15.0	-10.3	Pass
Unimodal	N/A	Yes	Yes	Pass
Oscillations	N/A	within 10% of peak	Yes	Pass
Overall Test Results				Pass

Jessica Hall
Laboratory Technician



11/22/11
Test Date

David Winkelbauer
Approved By



Test Desc: Head Drop
Component ID: D113911

Test Date: 11/22/11
Velocity: 0 ft/s, 0.00 m/s

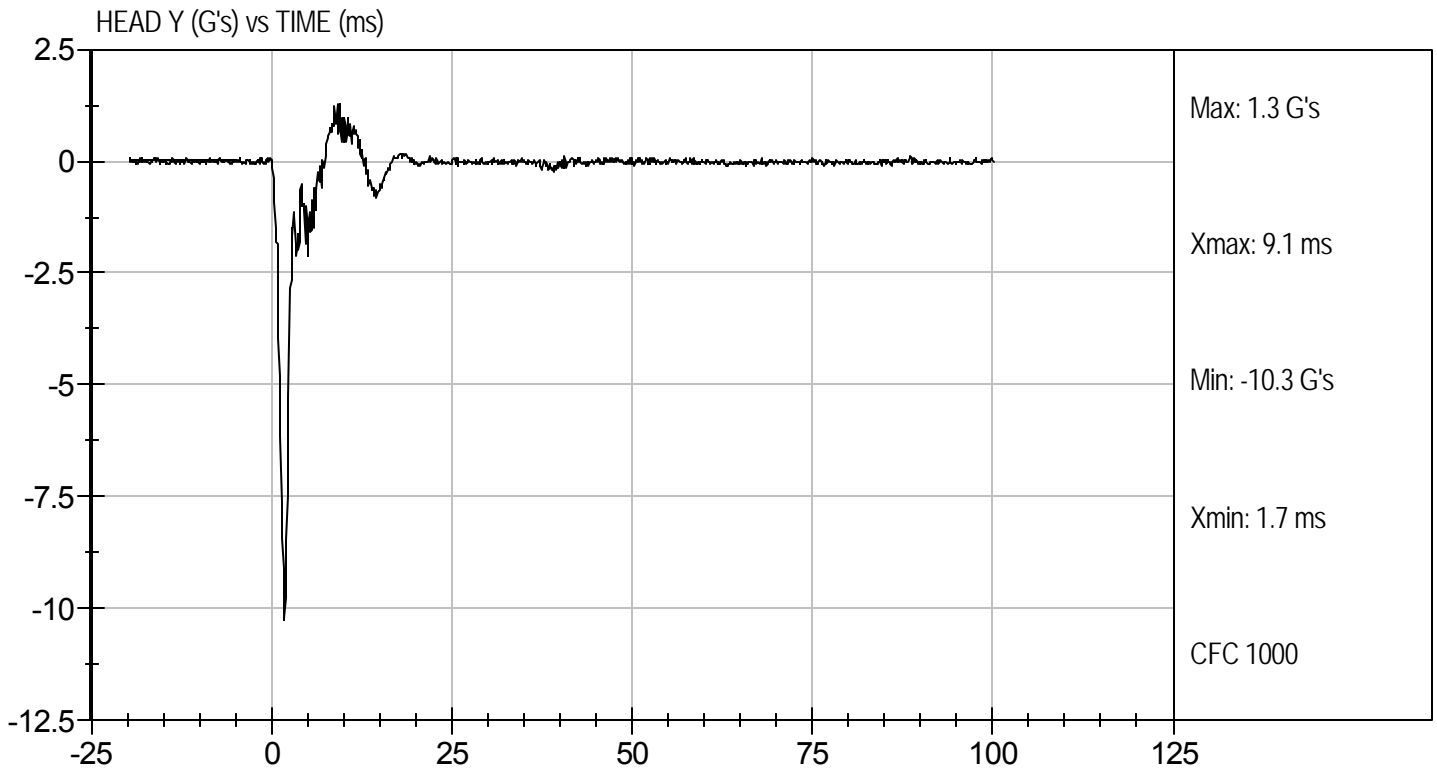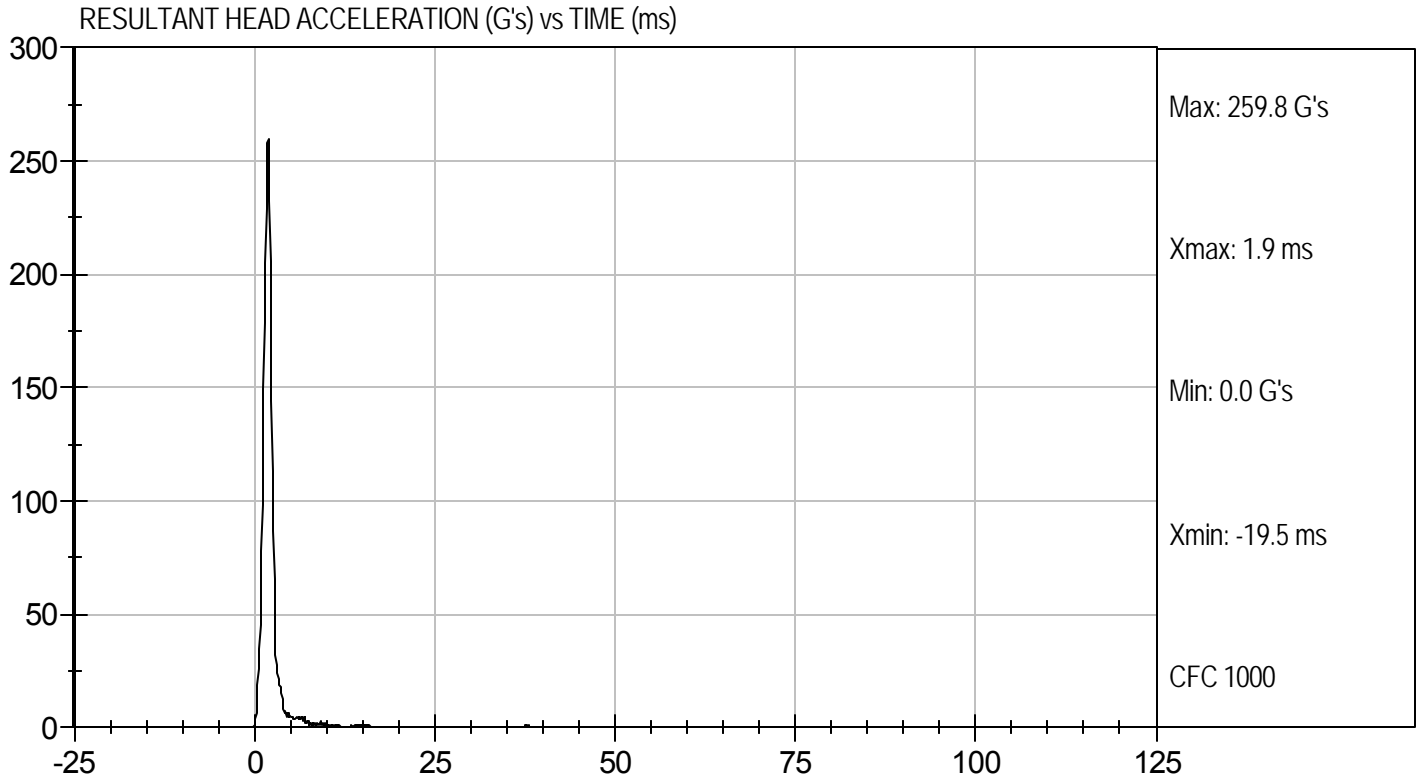

MGA RESEARCH CORPORATION
NECK FLEXION TEST
HYBRID III 50TH PERCENTILE MALE


ATD Serial No: 351

Test I.D.: D113912

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.6	Pass
Laboratory Relative Humidity		%	10 to 70	29	Pass
Pendulum Velocity		m/s	6.89 to 7.13	7.07	Pass
Pendulum Deceleration	10 ms	G's	22.50 to 27.50	23.90	Pass
	20 ms	G's	17.60 to 22.60	18.02	Pass
	30 ms	G's	12.50 to 18.50	13.61	Pass
Peak Pendulum Deceleration After 30 ms		G's	<= 29.0	13.8	Pass
Deceleration Decay Time to Cross 5 G's		ms	34.0 to 42.0	39.2	Pass
Maximum "D" Plane Rotation	Maximum	Degrees	64.0 to 78.0	71.3	Pass
	Time	ms	57.0 to 64.0	59.5	Pass
"D" Plane Rotation Decay Time To Zero Crossing		ms	113.0 to 128.0	114.2	Pass
Moment About Occipital Condyle	Maximum	N m	88.1 to 108.5	93.5	Pass
	Time	ms	47.0 to 58.0	52.2	Pass
Positive Moment Decay Time To Zero Crossing		ms	97.0 to 107.0	101.5	Pass
Overall Test Results					Pass


 Laboratory Technician



11/22/11
 Test Date


 Approved By



Test Desc: Neck Flexion
Component ID: D113912


Test Date: 11/22/11
Velocity: 23.2 ft/s, 7.07 m/s

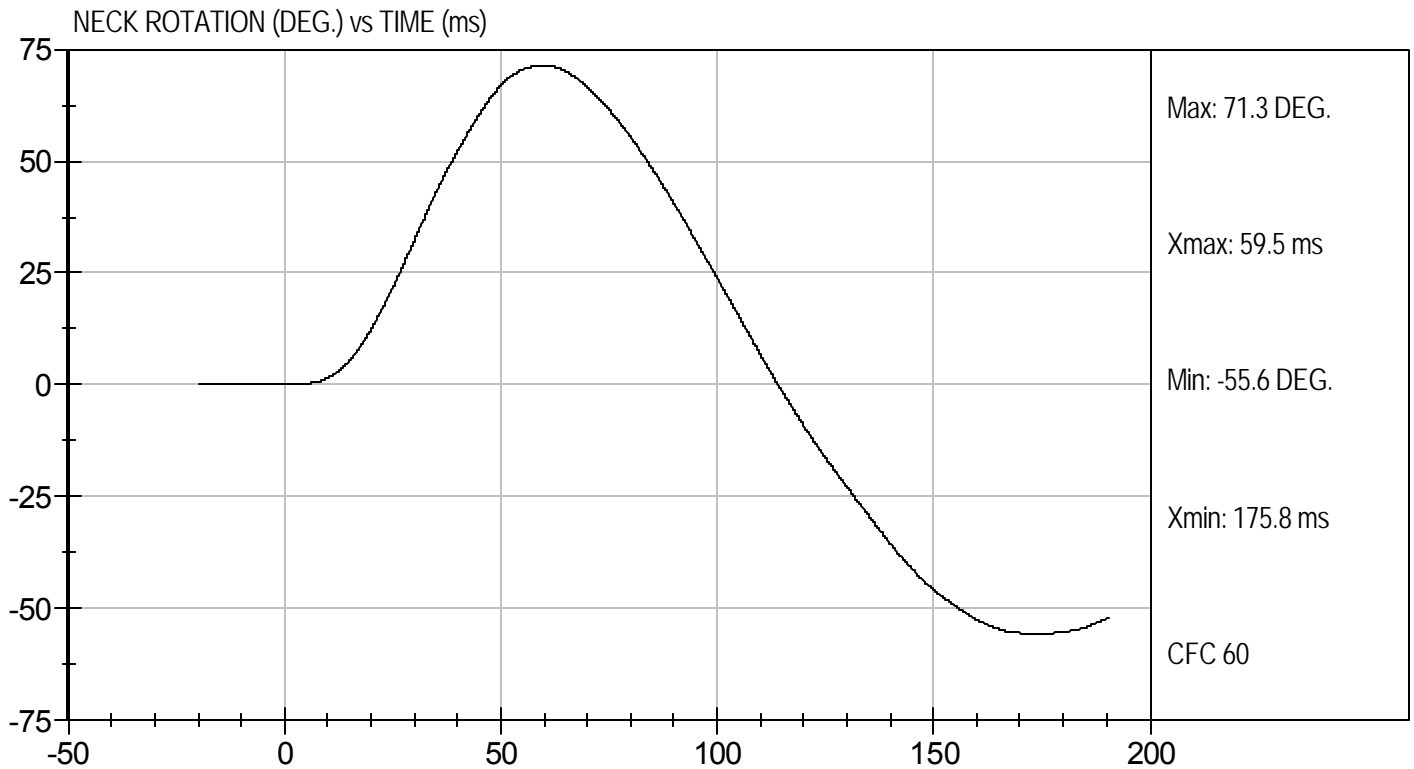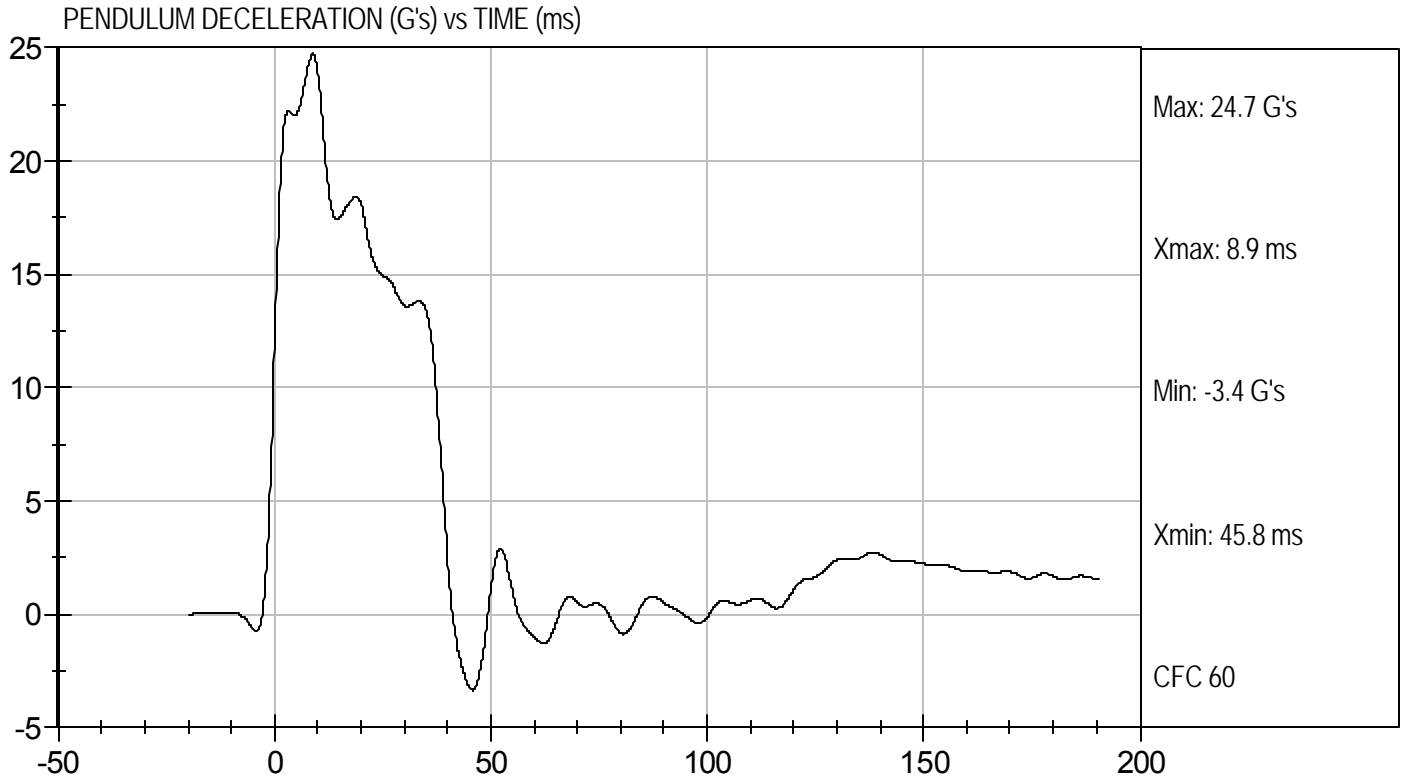



Test Desc: Neck Flexion
Component ID: D113912

Test Date: 11/22/11
Velocity: 23.2 ft/s, 7.07 m/s

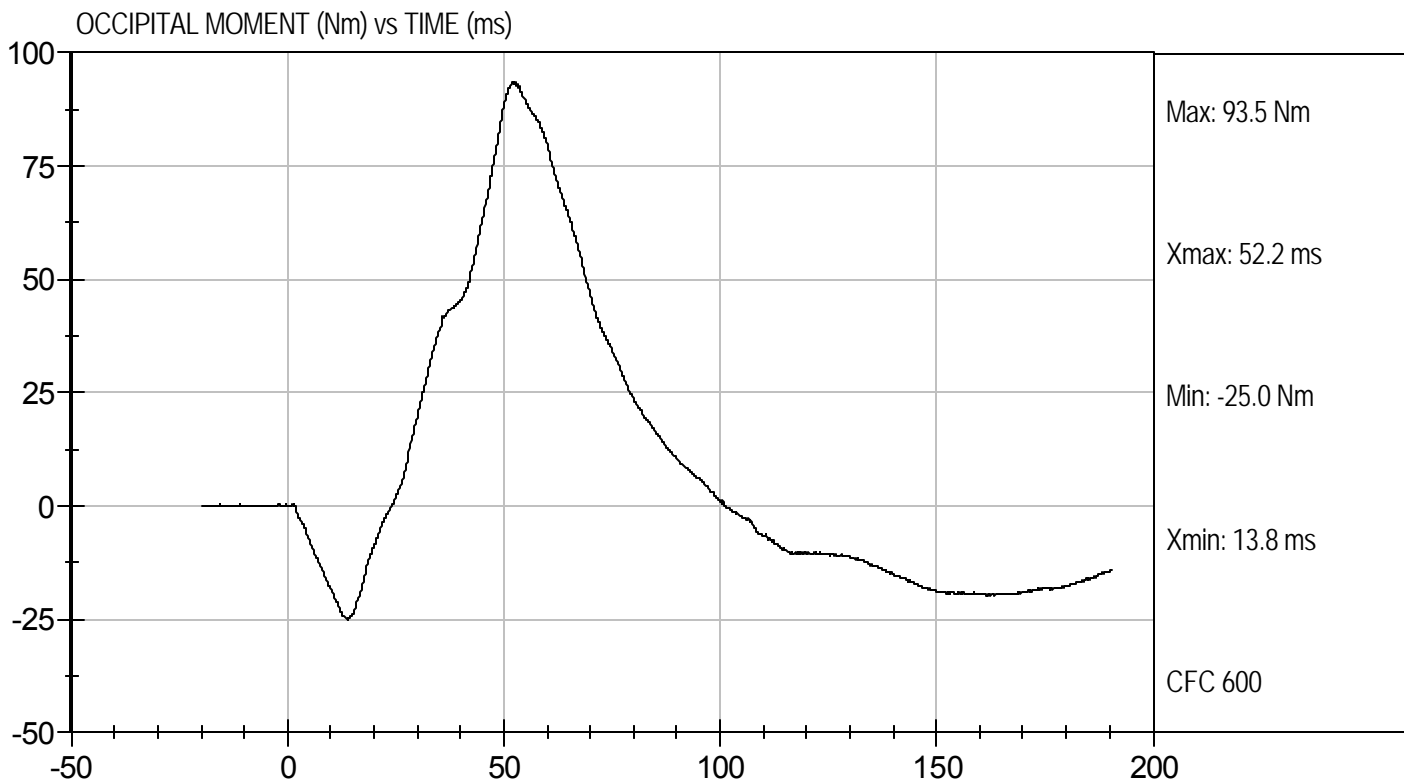

**MGA RESEARCH CORPORATION
NECK EXTENSION TEST
HYBRID III 50TH PERCENTILE MALE**

ATD Serial No: 351

Test I.D.: D113913

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.7	Pass
Laboratory Relative Humidity		%	10 to 70	29	Pass
Pendulum Velocity		m/s	5.95 to 6.19	6.13	Pass
Pendulum Deceleration	10 ms	G's	17.20 to 21.20	17.38	Pass
	20 ms	G's	14.00 to 19.00	14.62	Pass
	30 ms	G's	11.00 to 16.00	11.07	Pass
Peak Pendulum Deceleration After 30 ms		G's	<= 22.0	11.4	Pass
Deceleration Decay Time to Cross 5 G's		ms	38.0 to 46.0	40.9	Pass
Maximum "D" Plane Rotation	Maximum	Degrees	81.0 to 106.0	99.9	Pass
	Time	ms	72.0 to 82.0	80.6	Pass
"D" Plane Rotation Decay Time To Zero Crossing		ms	147.0 to 174.0	158.8	Pass
Moment About Occipital Condyle	Maximum	Nm	-52.9 to -79.9	-61.0	Pass
	Time	ms	65.0 to 79.0	71.9	Pass
Negative Moment Decay Time To Zero Crossing		ms	120.0 to 148.0	145.7	Pass
Overall Test Results					Pass

Jessica Hall
Laboratory Technician



11/22/11
Test Date

David Winkelbauer
Approved By



Test Desc: Neck Extension
Component ID: D113913


Test Date: 11/22/11
Velocity: 20.10 ft/s, 6.13 m/s

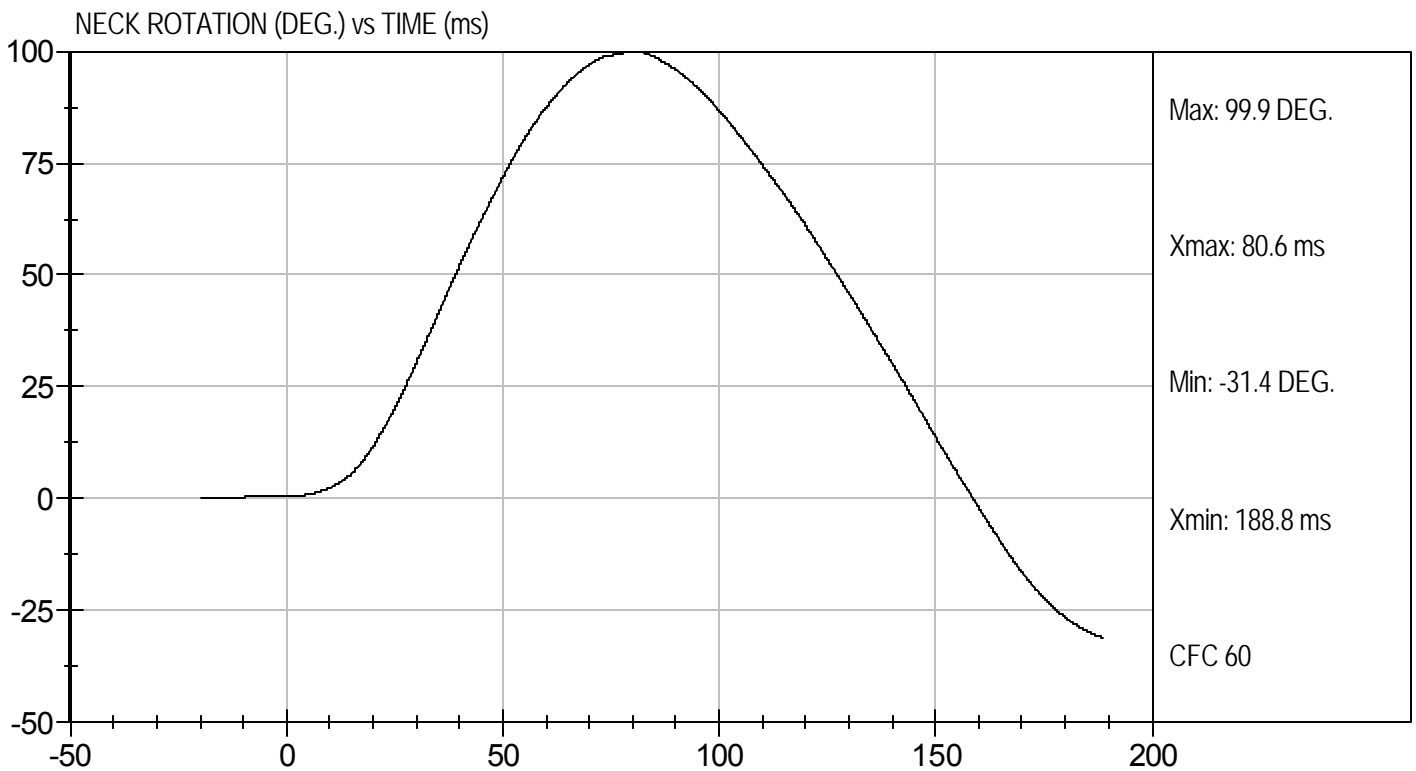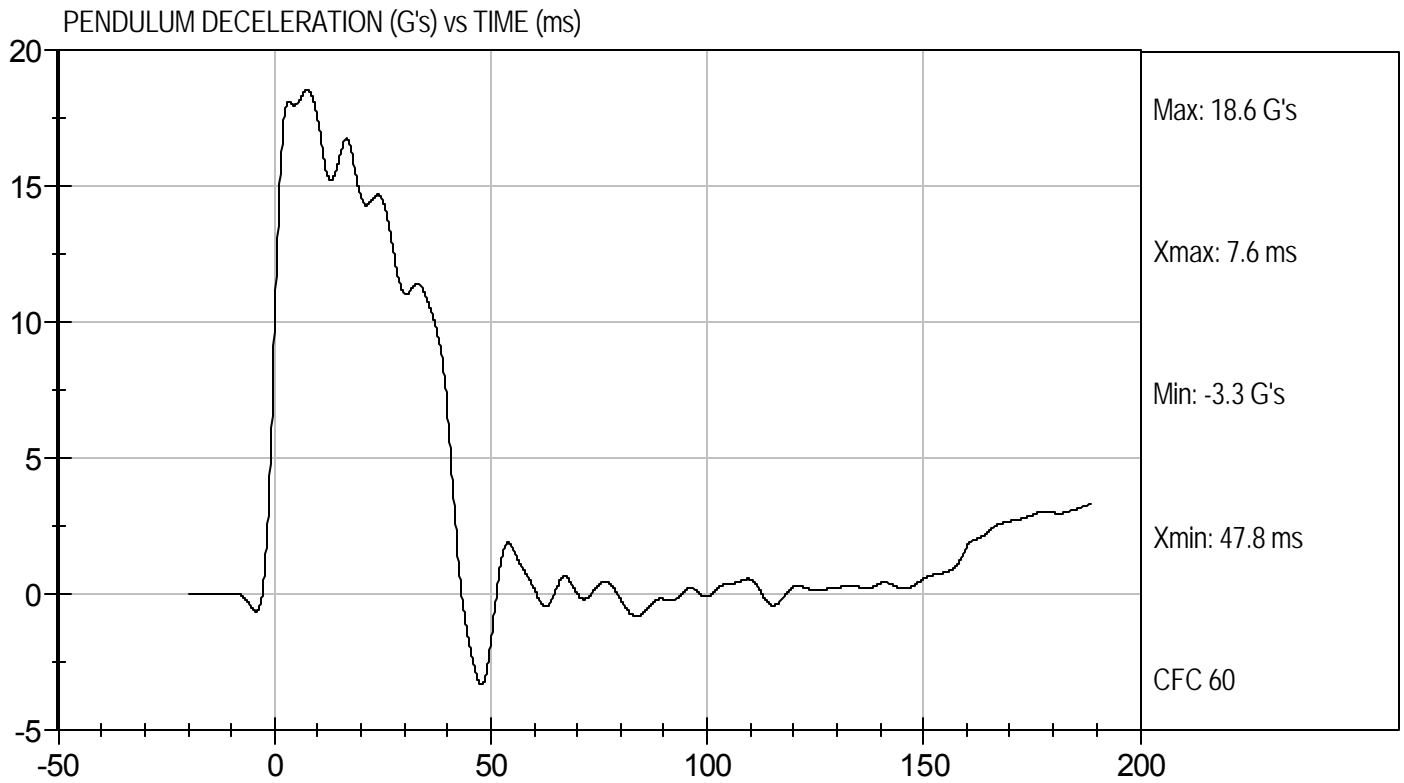



Test Desc: Neck Extension
Component ID: D113913

Test Date: 11/22/11
Velocity: 20.10 ft/s, 6.13 m/s

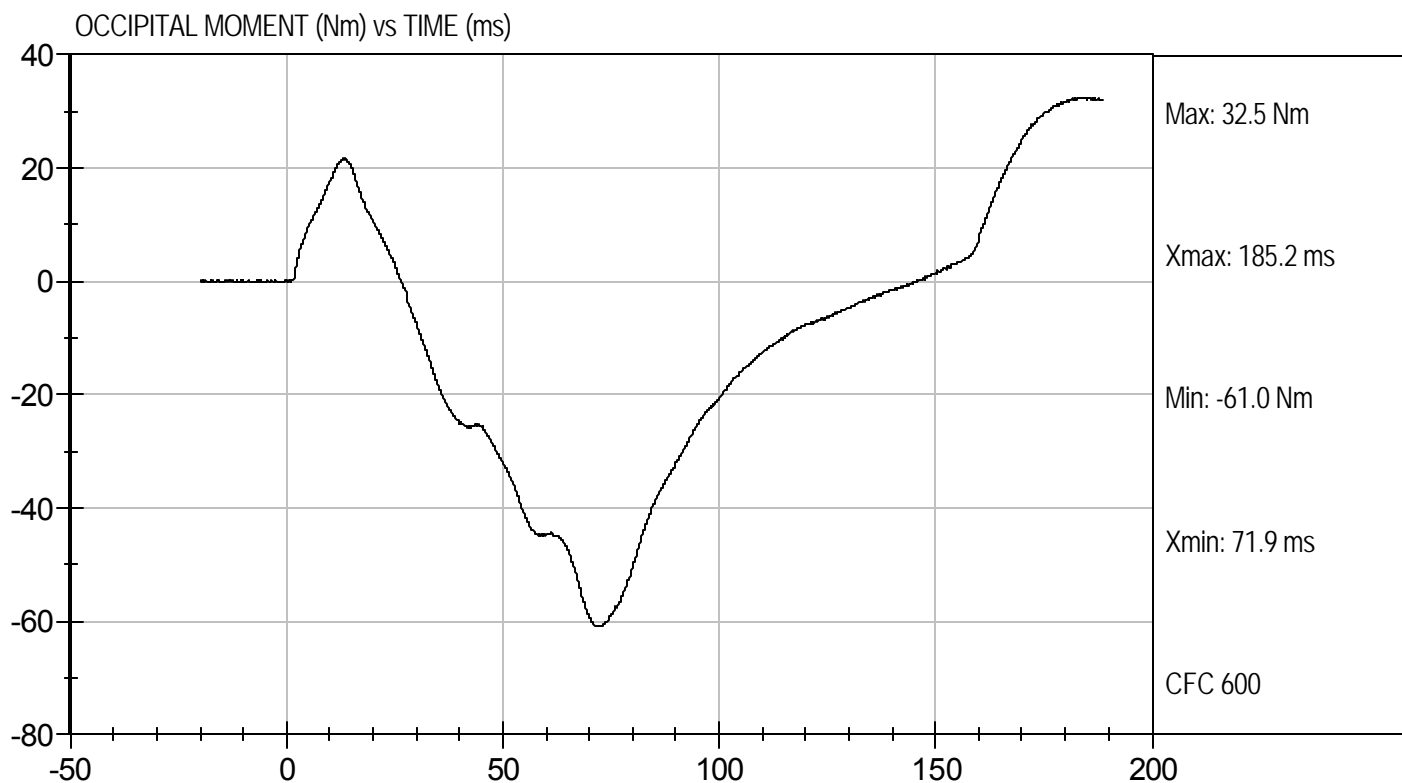

**MGA RESEARCH CORPORATION
THORAX IMPACT
HYBRID III 50TH PERCENTILE MALE**

ATD Serial No: 351

Test I.D: D113914

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	20.6 to 22.2	21.4	Pass
Laboratory Relative Humidity	%	10 to 70	29	Pass
Probe Velocity	m/s	6.58 to 6.82	6.77	Pass
Peak Probe Force	N	5159 to 5893	5,244	Pass
Peak Sternum Displacement	cm	6.35 to 7.26	6.55	Pass
Internal Hysteresis	%	69 to 85	70	Pass
Overall Test Results				Pass

Jessica Gall
Laboratory Technician


11/22/11
Test Date

David Winkelbauer
Approved By



Test Desc: Thorax Impact
Component ID: D113914

Test Date: 11/22/11
Velocity: 22.22 ft/s, 6.77 m/s

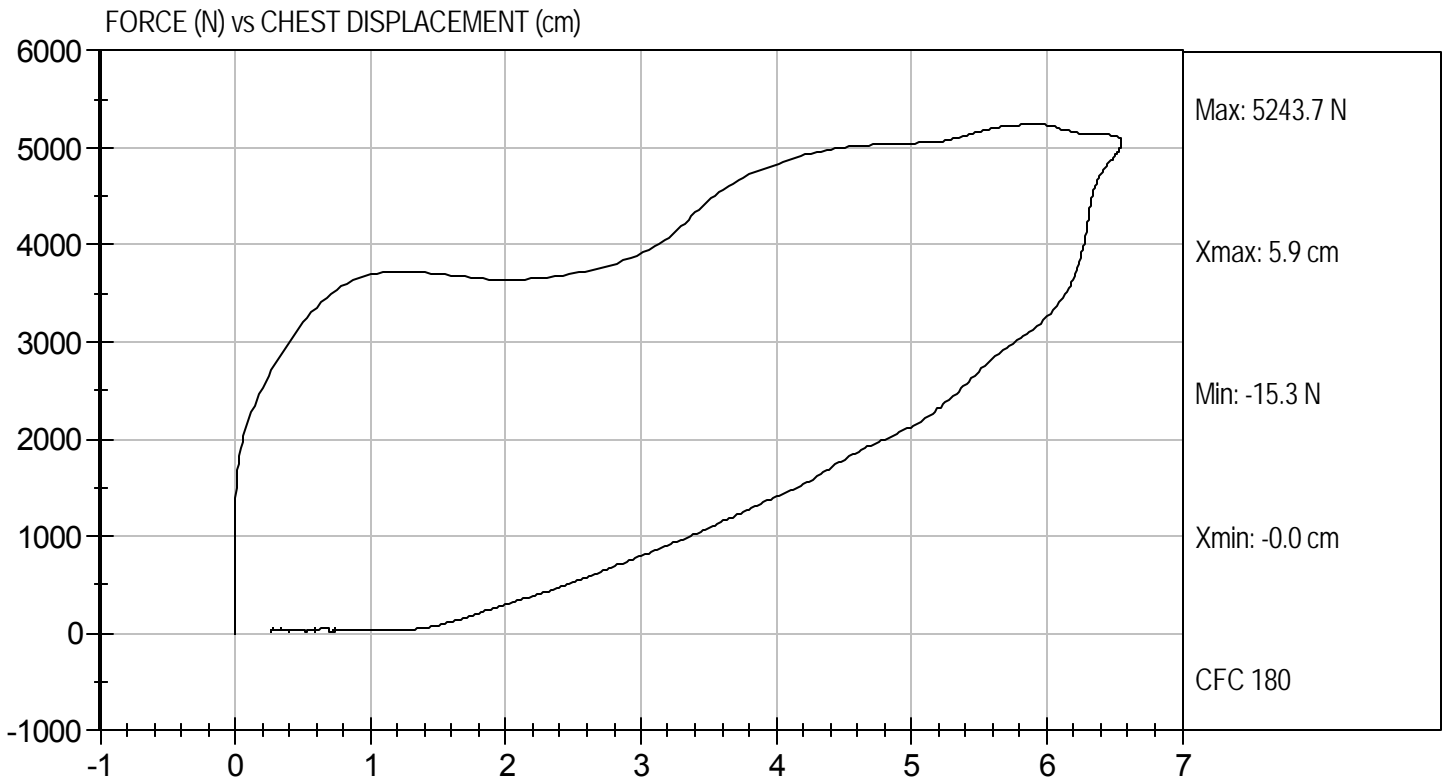

**MGA RESEARCH CORPORATION
RIGHT KNEE IMPACT TEST
HYBRID III 50TH PERCENTILE MALE**

ATD Serial No: 351

Test I.D: D113915

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.5	21.9	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	2.07 to 2.13	2.12	Pass
Peak Probe Force	Newtons	4715 to 5782	5,178	Pass
Overall Test Results				Pass

Jessica Gall
Laboratory Technician


11/22/11
Test Date

David Winkelbauer
Approved By



Test Desc: Right Knee
Component ID: D113915

Test Date: 11/22/11
Velocity: 6.97 ft/s, 2.12 m/s

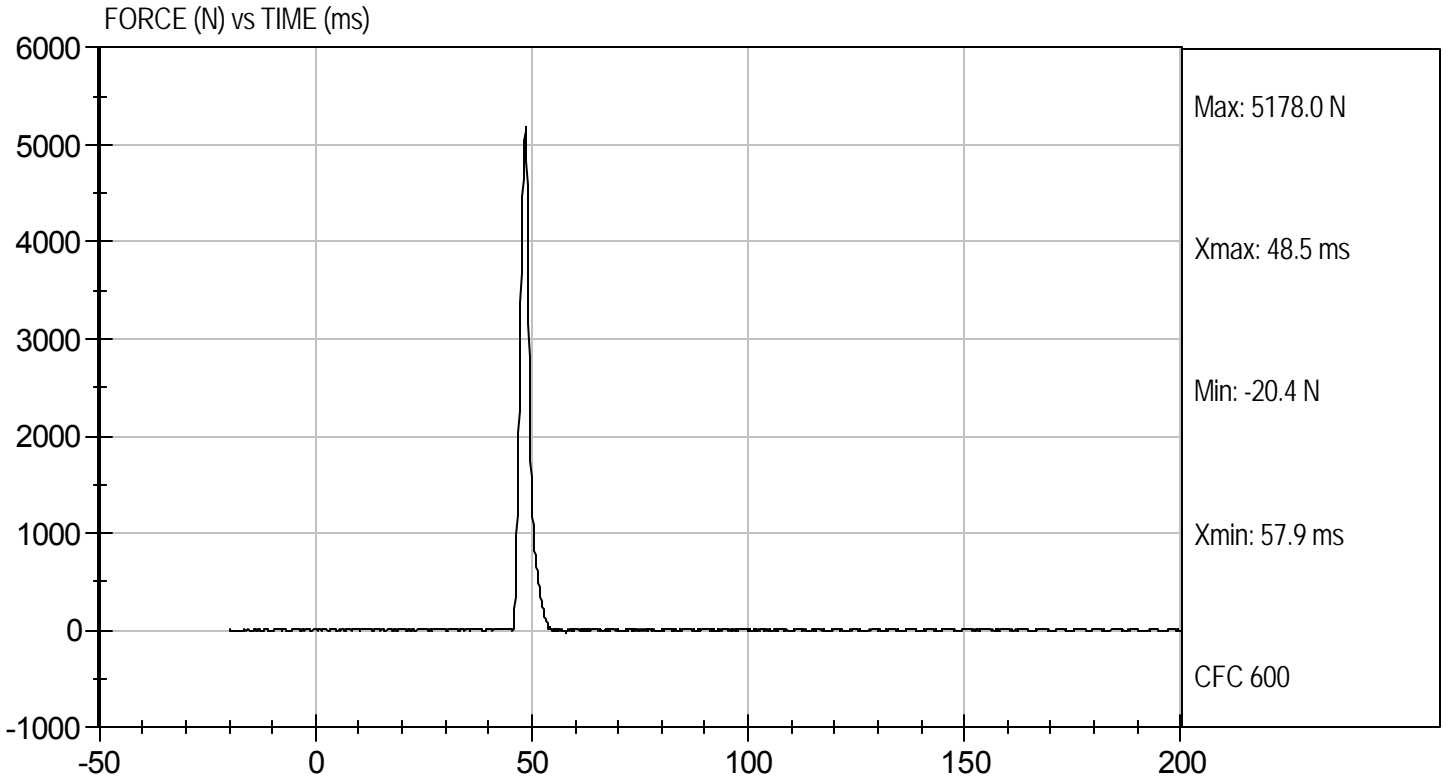

MGA RESEARCH CORPORATION
LEFT KNEE IMPACT TEST
HYBRID III 50TH PERCENTILE MALE

ATD Serial No: 351

Test I.D: D113916

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.5	21.9	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Probe Velocity	m/s	2.07 to 2.13	2.12	Pass
Peak Probe Force	Newtons	4715 to 5782	5,240	Pass
Overall Test Results				Pass

Jessica Gall
 Laboratory Technician


11/22/11
 Test Date

David Winkelbauer
 Approved By



Test Desc: Left Knee
Component ID: D113916

Test Date: 11/22/11
Velocity: 6.97 ft/s, 2.12 m/s

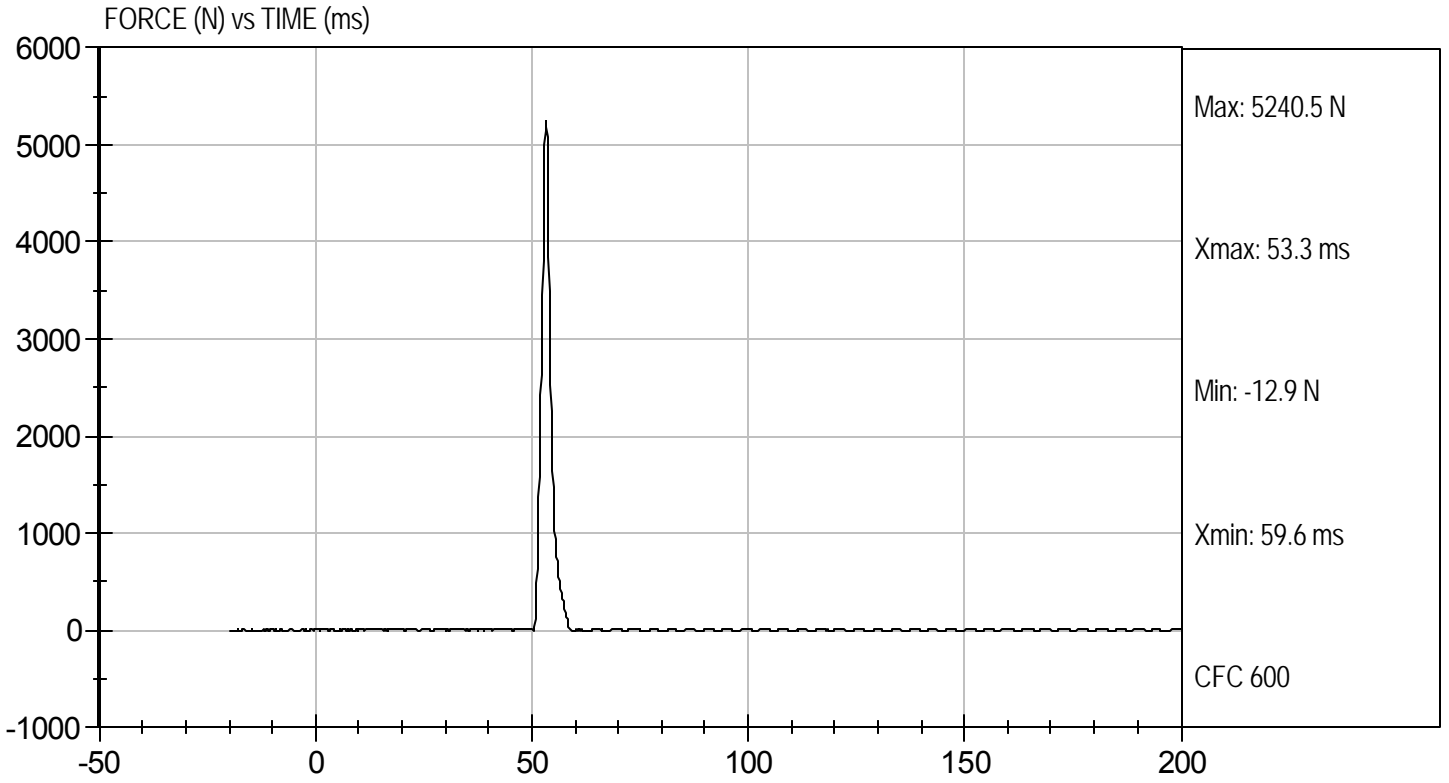

MGA RESEARCH CORPORATION
HIP-FEMUR FLEXION TEST
HYBRID III 50TH PERCENTILE MALE

ATD Serial No: 351

Test I.D: D113910

Tested Parameter	Units	Specification	Result		Pass/Fail
			Right	Left	
Laboratory Temperature	deg C	18.9 to 25.6	21.8	21.8	Pass
Laboratory Relative Humidity	%	10 to 70	30	30	Pass
Rotation Rate	deg/s	5.0 -10.0	5.7	5.7	Pass
30 Degrees	Nm	94.9 Nm Max	63.6	62.0	Pass
150 ft-lbf / 203.4 Nm	Deg	40.0 - 50.0 Degree Max Rotation	42.4	41.9	Pass
Overall Test Results					Pass

Jessica Hall
Laboratory Technician


11/22/11
Test Date

David Winkelbauer
Approved By



Test Desc: Hip Femur Flexion
Component ID: D113919


Test Date: 11/22/11
Velocity: 0 ft/s, 0.00 m/s

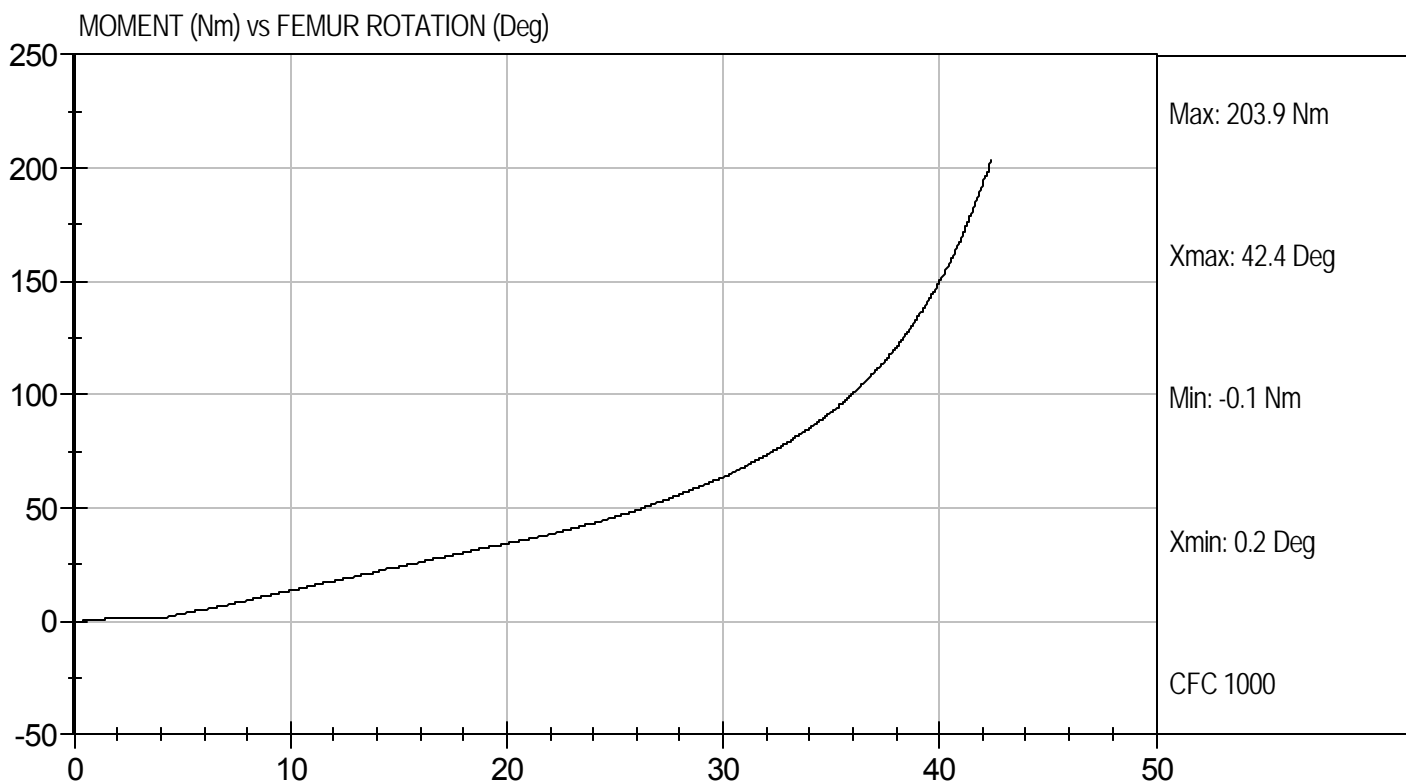



Test Desc: Hip Femur Flexion
Component ID: D113910

Test Date: 11/22/11
Velocity: 0 ft/s, 0.00 m/s

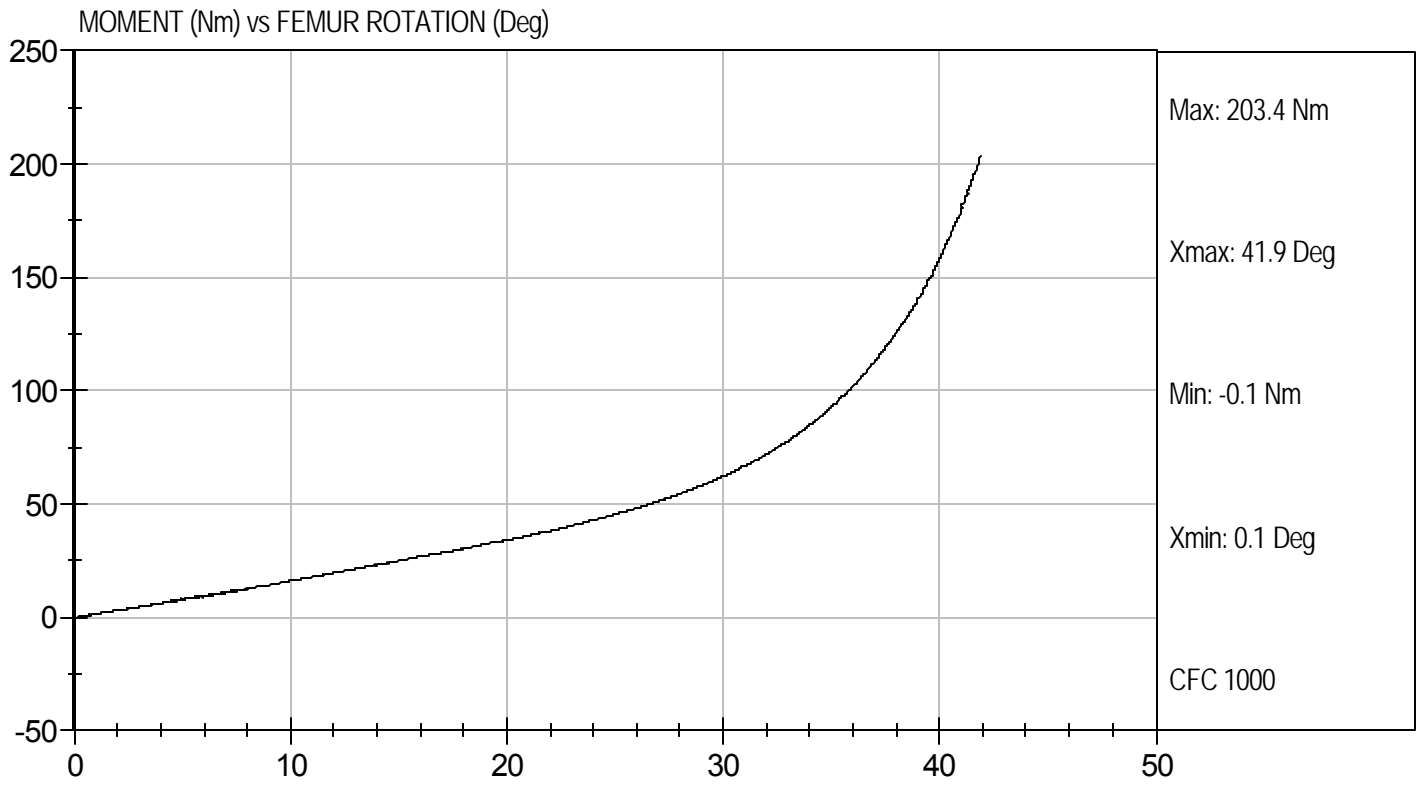

**Hybrid III, 5th External Measurements
SN: 634**

HYBRID III, PART 572, SUBPART O EXTERNAL DIMENSIONS				
DIMENSION	DESCRIPTION	DETAILS	ASSEMBLY DIMENSION (mm)	ACTUAL MEASUREMENT
A	TOTAL SITTING HEIGHT	Seat surface to highest point on top of the head.	774.7-800.1	784.6
B	SHOULDER PIVOT HEIGHT	Centerline of shoulder pivot bolt to the seat surface.	431.8-457.2	449.0
C	H-POINT HEIGHT	Reference	81.3-86.3	85.0
D	H-POINT LOCATION FROM BACKLINE	Reference	144.8-149.8	145.0
E	SHOULDER PIVOT FROM BACKLINE	Center of the shoulder clevis to the rear vertical surface of the fixture.	68.6-83.8	79.2
F	THIGH CLEARANCE	Measured at the highest point on the upper femur segment.	119.4-134.6	125.6
G	BACK OF ELBOW TO WRIST PIVOT	back of the elbow flesh to the wrist pivot in line with the elbow and wrist pivots	243.9-259.1	253.4
H	HEAD BACK TO BACKLINE	Back of Skull cap skin to seat rear vertical surface (Reference)	43.2-48.2	45.0
I	SHOULDER TO- ELBOW LENGTH	Measure from the highest point on top of the shoulder clevis to the lowest part of the flesh on the elbow in line with the elbow pivot bolt.	276.8-297.2	277.8
J	ELBOW REST HEIGHT	Measure from the flesh below the elbow pivot bolt to the seat surface.	182.8-203.2	197.5
K	BUTTOCK TO KNEE LENGTH	The forward most part of the knee flesh to the rear vertical surface of the fixture.	520.7-546.1	541.4
L	POPLITEAL HEIGHT	Seat surface to the plane of the horizontal plane of the bottom of the feet.	355.6-376.0	362.1
M	KNEE PIVOT HEIGHT	Centerline of knee pivot bolt to the horizontal plane of the bottom of the feet.	393.7-419.1	400.4
N	BUTTOCK POPLITEAL LENGTH	The rearmost surface of the lower leg to the same point on the rear surface of the buttocks used for dim. "K".	414-439.4	428.6

HYBRID III, SUBPART O EXTERNAL DIMENSIONS, continued				
DIMENSION	DESCRIPTION	DETAILS	ASSEMBLY DIMENSION (mm)	ACTUAL MEASUREMENT
O	CHEST DEPTH WITHOUT JACKET	Measured 304.8 ± 5.1 mm above seat surface	175.3-190.5	181.6
P	FOOT LENGTH	Tip of toe to rear of heel	218.5-233.7	224.7
Q	STANDING HEIGHT	(THEORETICAL)	1501.1	N/A
R	BUTTOCK TO KNEE PIVOT LENGTH	The rear surface of the buttocks to the knee pivot bolt	457.2-482.6	482.0
S	HEAD BREADTH	The widest part of the head	137.1-147.3	139.6
T	HEAD DEPTH	Back of the head to the forehead	177.8-188.0	179.2
U	HIP BREADTH	The widest part of the hip	299.7-314.9	306.1
V	SHOULDER BREADTH	Outside edges of right and left shoulder clevises	350.5-365.7	355.5
W	FOOT BREADTH	The widest part of the foot	78.8-94.0	90.0
X	HEAD CIRCUMFERENCE	Measured at the point as in dim. "T"	528.3-548.7	540.6
Y	CHEST CIRCUMFERENCE (WITH CHEST JACKET)	Measured 345.4 ± 12.7 mm above seat surface	850.9-881.3	868.7
Z	WAIST CIRCUMFERENCE	Measured 165.1 ± 5.1 mm above seat surface	759.5-789.9	786.8
AA	REFERENCE LOCATION FOR MEASUREMENT OF CHEST CIRCUMFERENCE	Reference	332.7-358.1	345.4
BB	REFERENCE LOCATION FOR MEASUREMENT OF WAIST CIRCUMFERENCE	Reference	160.1-170.2	165.1

MGA RESEARCH CORPORATION
HEAD DROP TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: 634

Test ID: D113761

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	29	Pass
Peak Resultant Acceleration	G's	250 to 300	270	Pass
Peak Lateral Acceleration	G's	+/- 15	-11.5	Pass
Unimodal	N/A	Yes	Yes	Pass
Oscillations	N/A	within 10% of peak	Yes	Pass
Overall Test Results				Pass

Jessica Hall
 Laboratory Technician



11/10/11
 Test Date

David Winkelbauer
 Approved By



Test Desc: Head Drop
Component ID: D113761

Test Date: 11/10/11
Velocity: 0 ft/s, 0.00 m/s

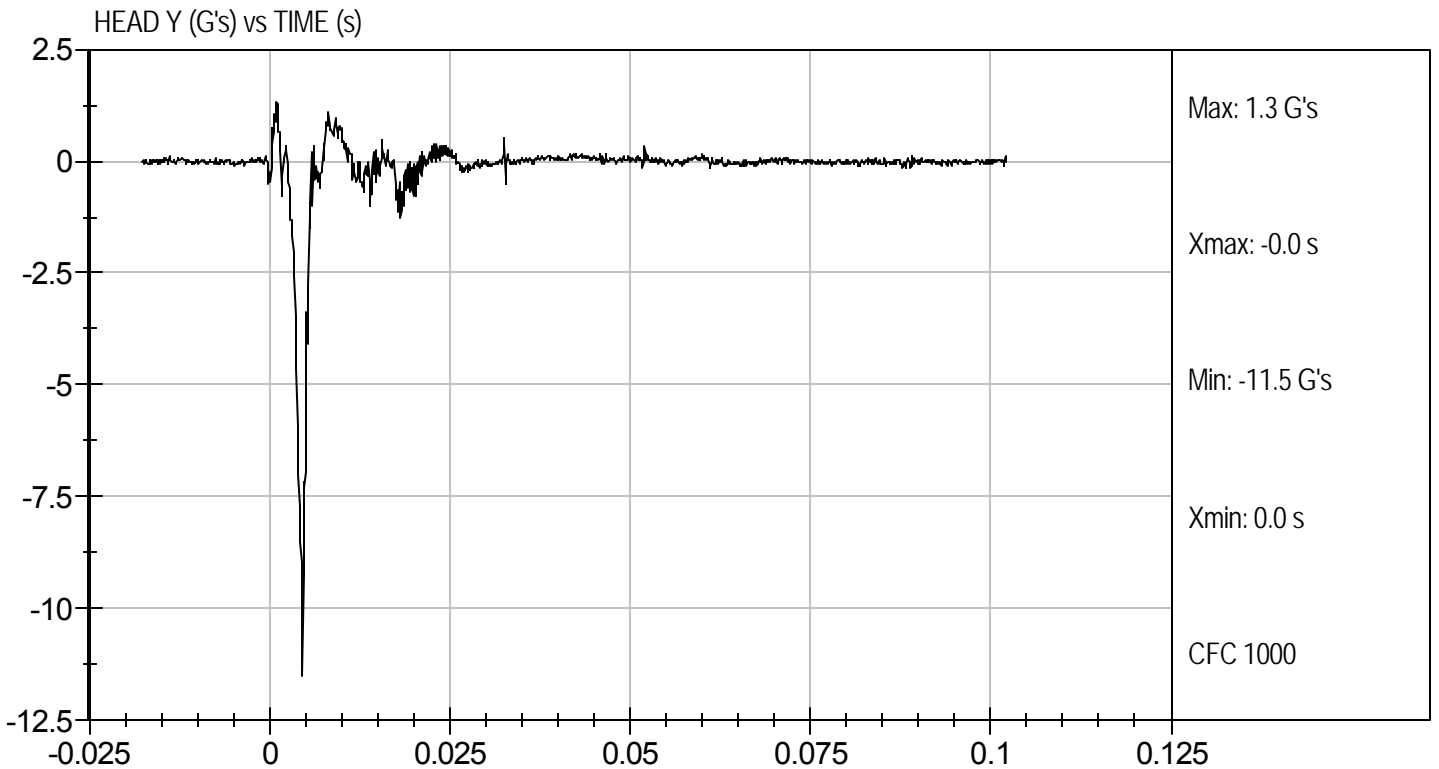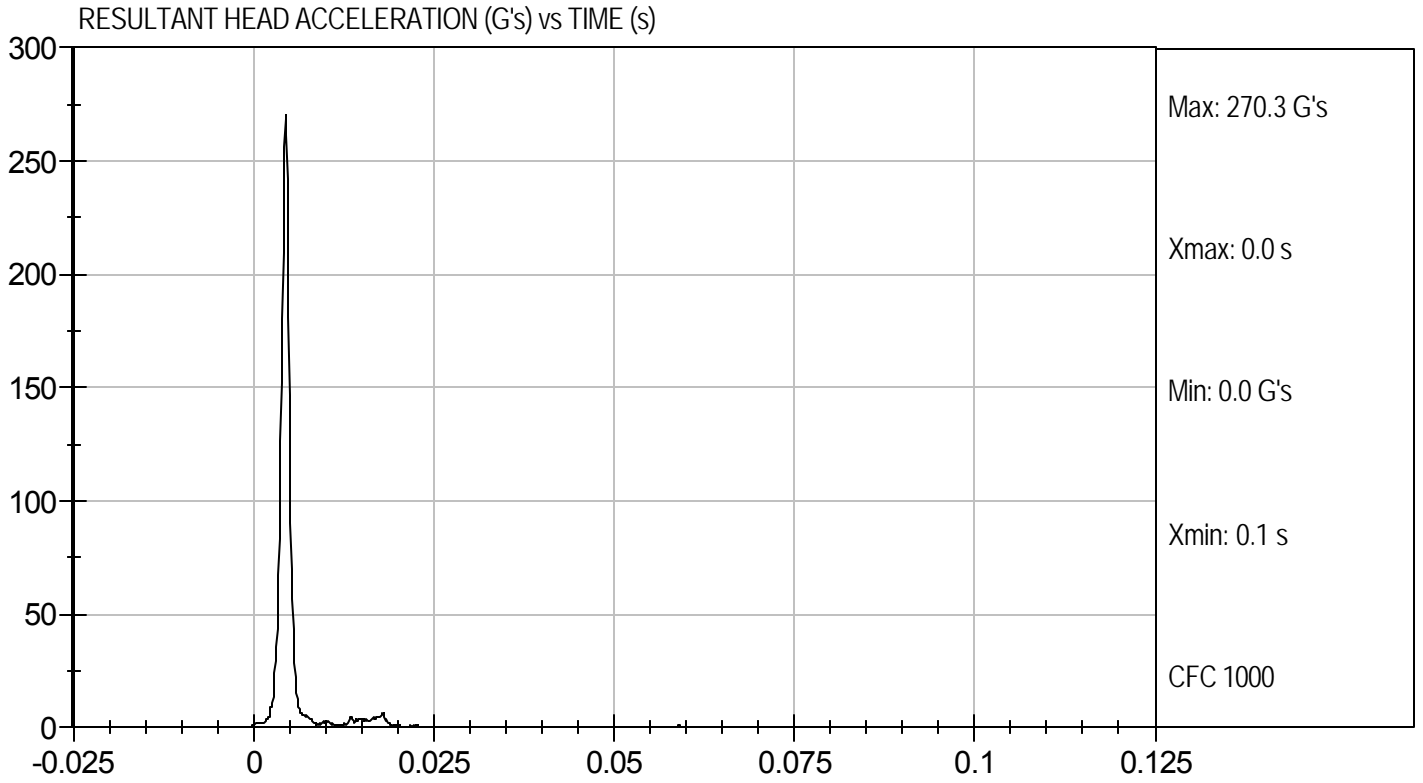

MGA RESEARCH CORPORATION
NECK FLEXION TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: 634

Test I.D.: D113762

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.6	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Speed		m/s	6.89 to 7.13	7.06	Pass
Pendulum Pulse	10 ms	m/s	2.1 to 2.5	2.5	Pass
	20 ms	m/s	4.0 to 5.0	4.5	Pass
	30 ms	m/s	5.8 to 7.0	6.2	Pass
D Plane Rotation	Max	deg	77 to 91	78	Pass
Occipital Condyle Moment within Deflection Corridor		Nm	69 to 83	71	Pass
Positive Moment Time Curve Decay to 10 Nm		ms	80 to 100	85	Pass
Overall Results					Pass

Jessica Gall
Laboratory Technician

11/10/11
Test Date


David Winkelbauer
Approved By




Test Desc: Neck Flexion
Component ID: D113762

Test Date: 11/10/11
Velocity: 23.15 ft/s, 7.06 m/s

PENDULUM VELOCITY (m/s) vs TIME (s)

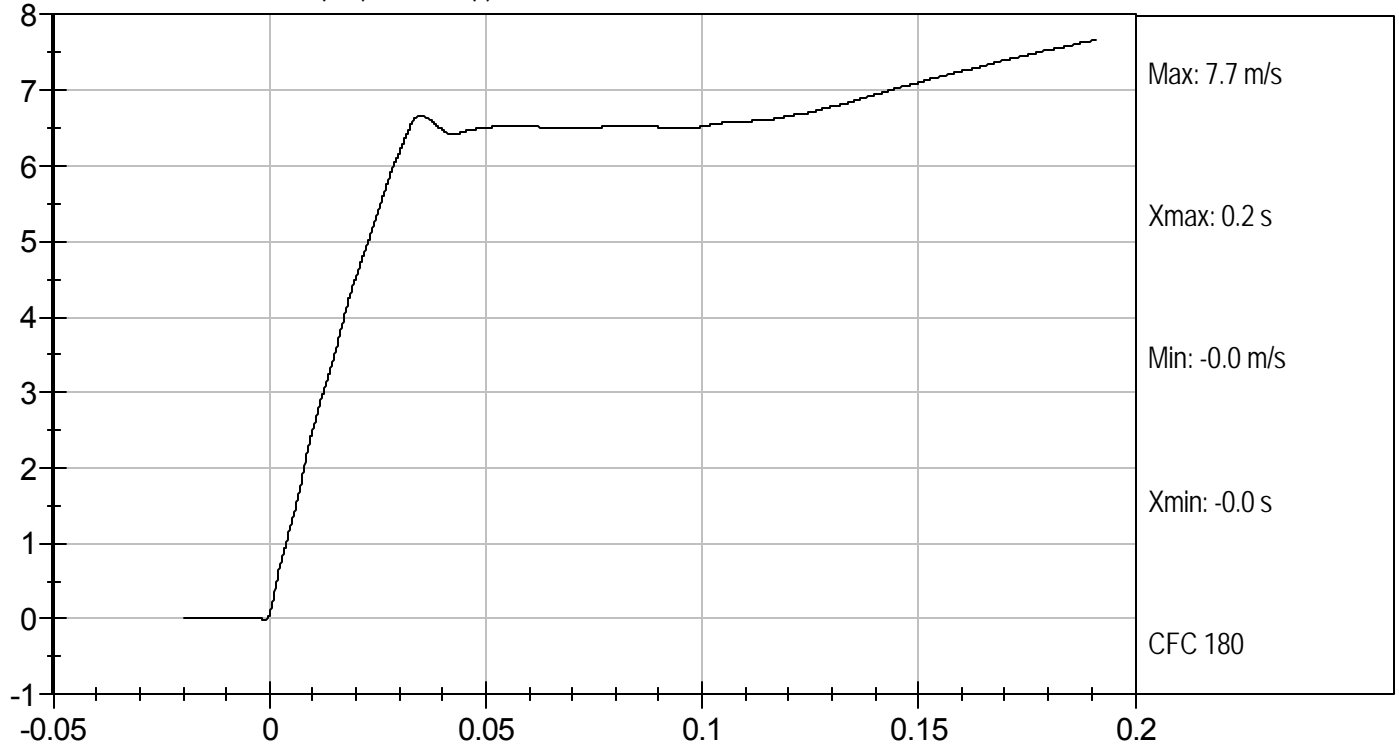


NECK ROTATION (DEG) vs TIME (s)

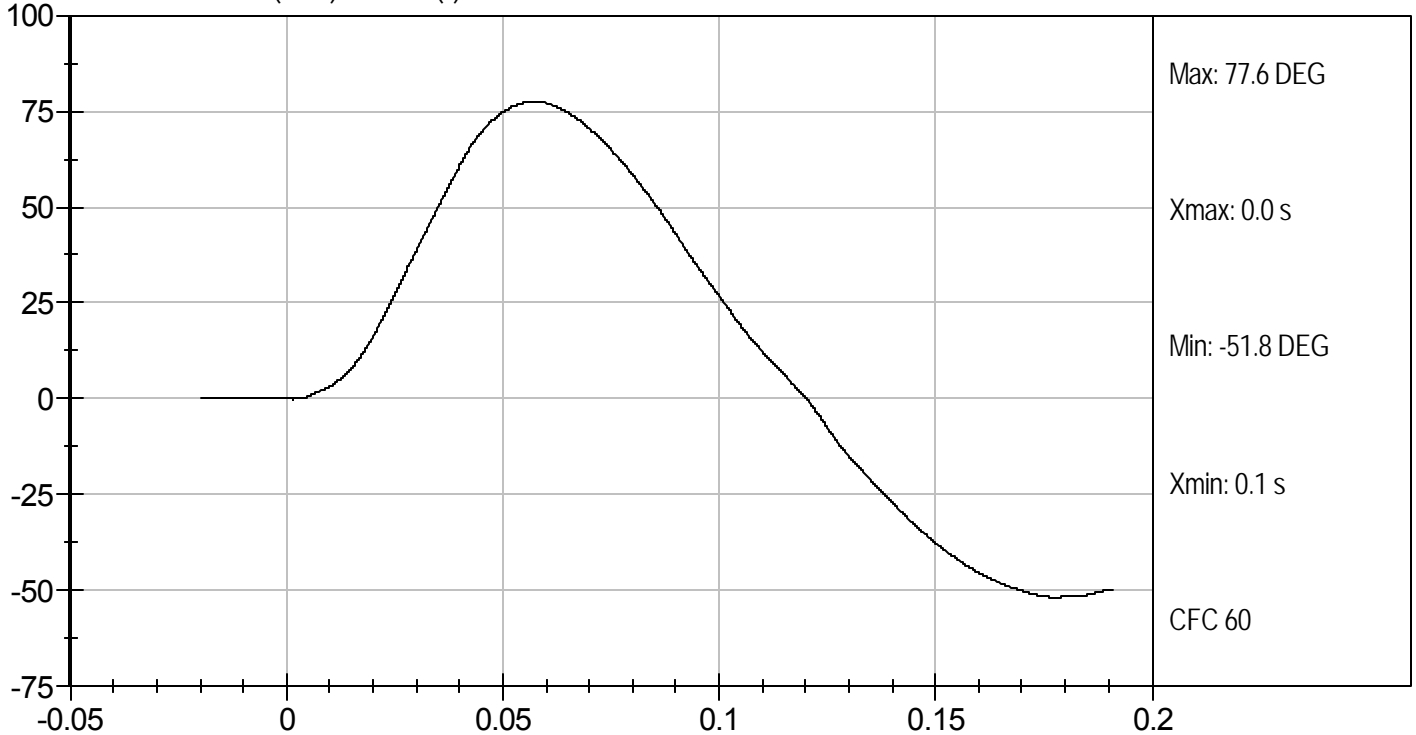



Test Desc: Neck Flexion
Component ID: D113762

Test Date: 11/10/11
Velocity: 23.15 ft/s, 7.06 m/s

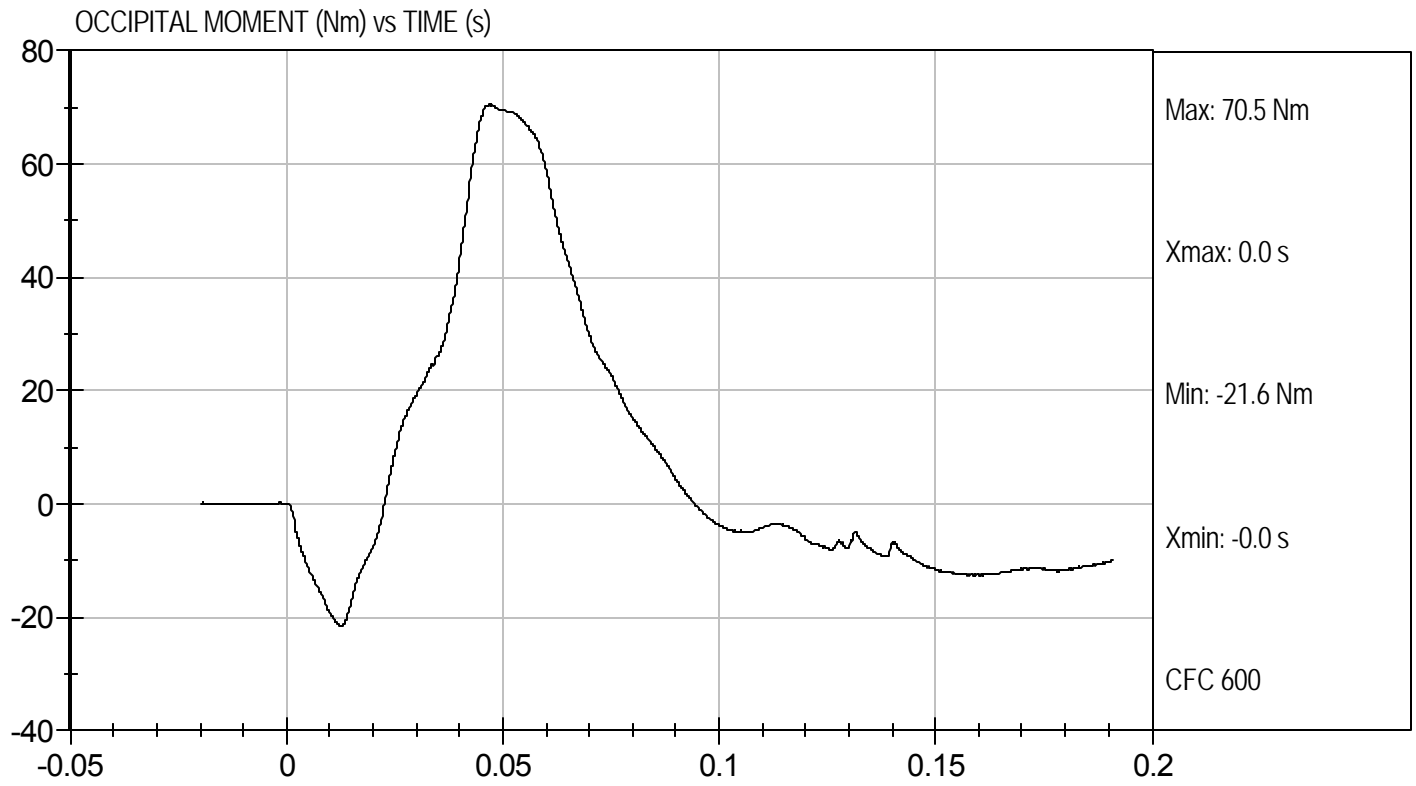

MGA RESEARCH CORPORATION
NECK EXTENSION TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: 634

Test I.D.: D113763

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.6	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Speed		m/s	5.95 to 6.19	6.12	Pass
Pendulum Pulse	10 ms	m/s	1.5 to 1.9	1.9	Pass
	20 ms	m/s	3.1 to 3.9	3.6	Pass
	30 ms	m/s	4.6 to 5.6	5.0	Pass
D Plane Rotation	Max	deg	99 to 114	104	Pass
Occipital Condyle Moment within Deflection Corridor		Nm	-65 to -53	-53	Pass
Negative Moment Time Curve Decay to -10 Nm		ms	94 to 114	101	Pass
Overall Results					Pass

Jessica Gall
Laboratory Technician

11/10/11
Test Date


David Winkelbauer
Approved By




Test Desc: Neck Extension
Component ID: D113763

Test Date: 11/10/11
Velocity: 20.08 ft/s, 6.12 m/s

PENDULUM VELOCITY (m/s) vs TIME (s)

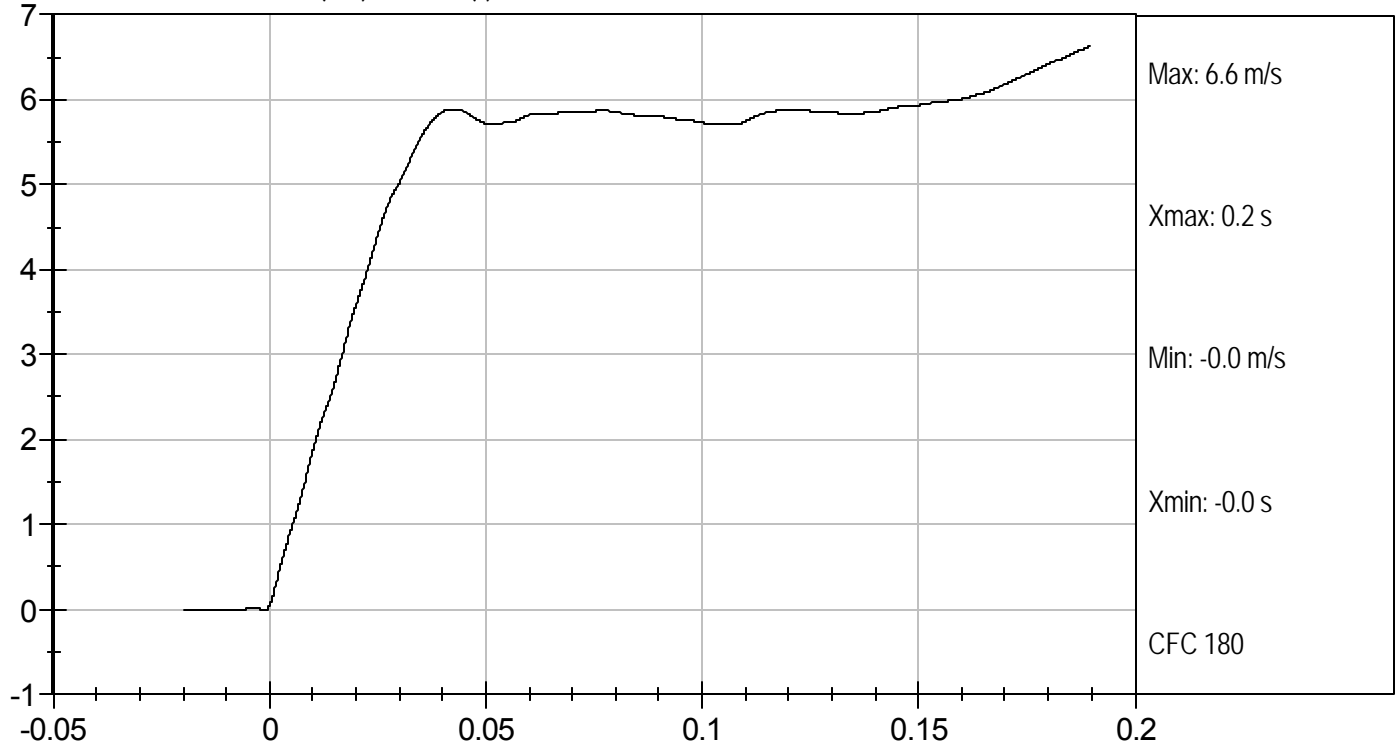


NECK ROTATION (DEG) vs TIME (s)

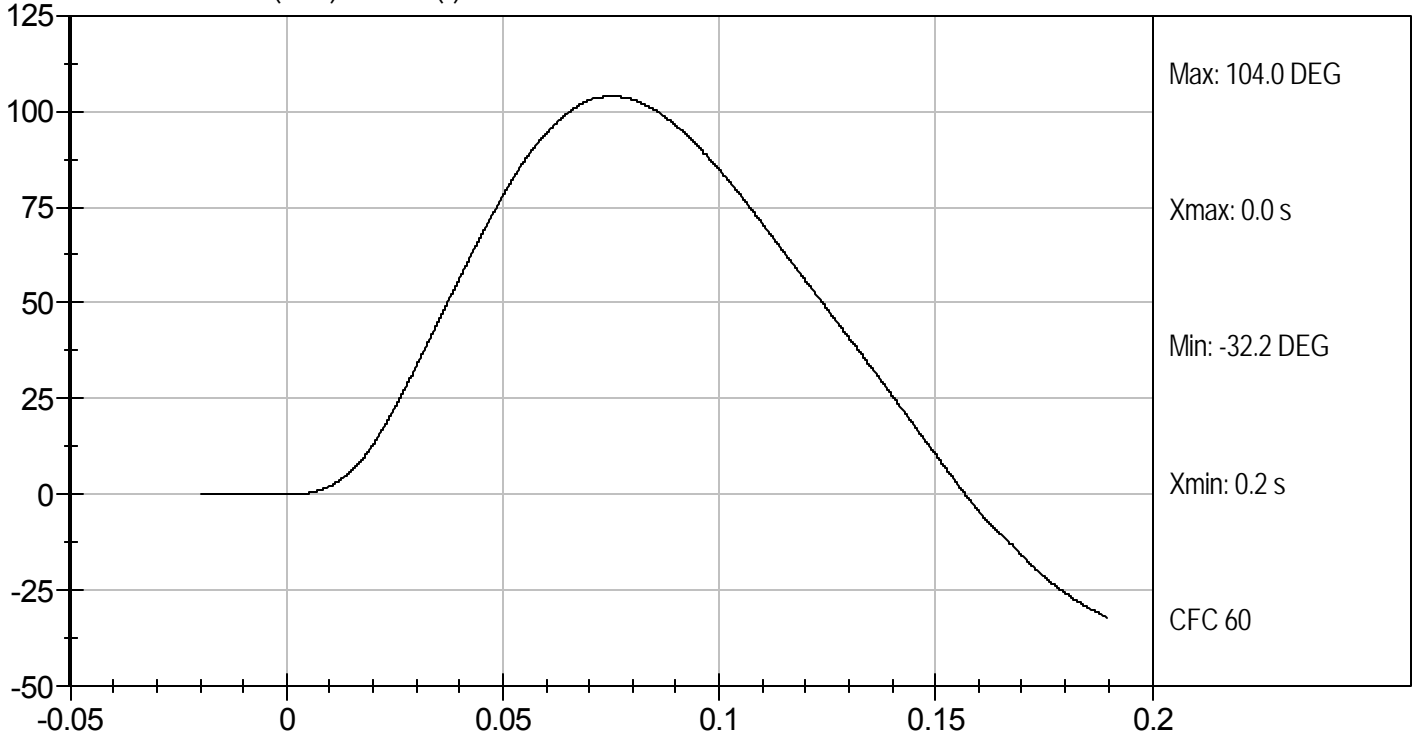



Test Desc: Neck Extension
Component ID: D113763

Test Date: 11/10/11
Velocity: 20.08 ft/s, 6.12 m/s

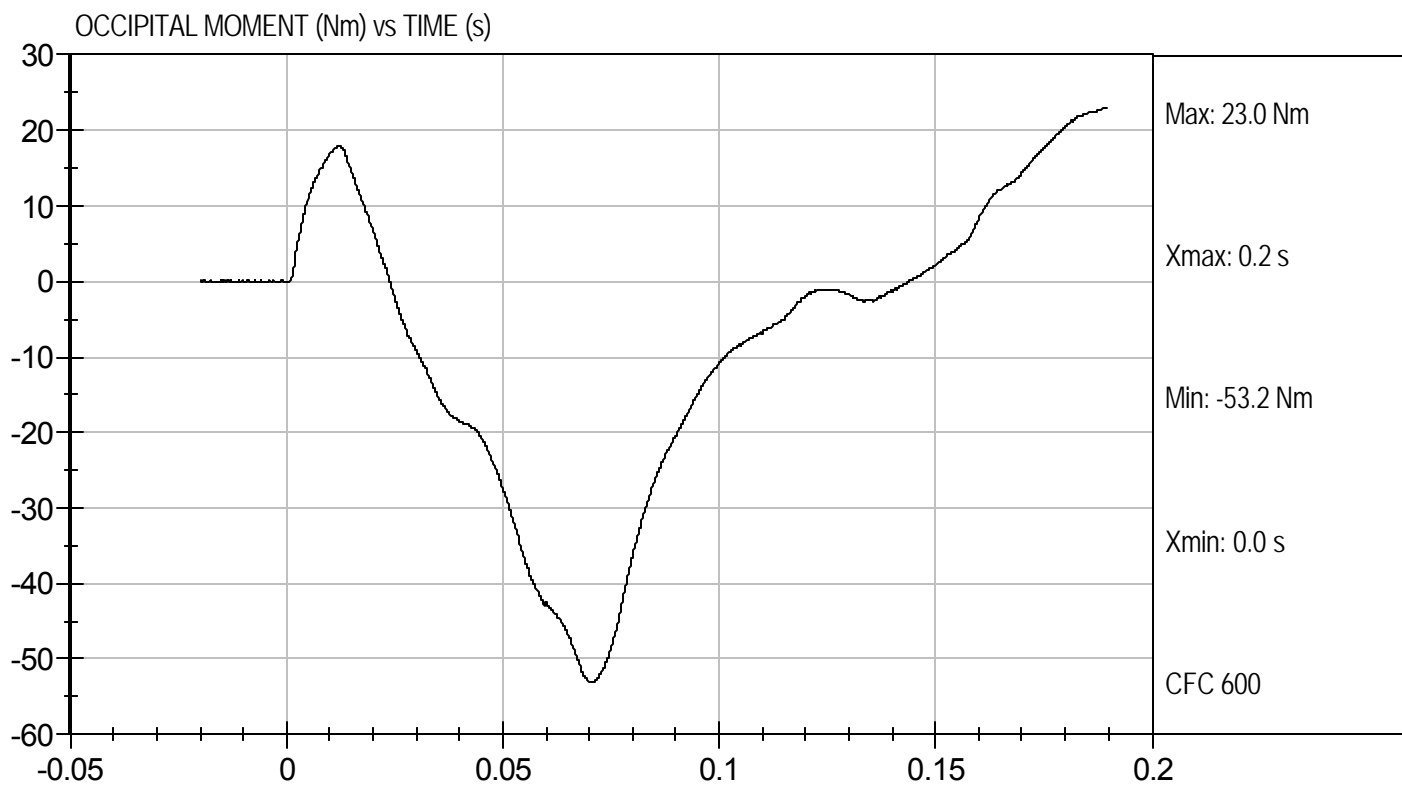

MGA RESEARCH CORPORATION
THORAX IMPACT
HYBRID III 5TH PERCENTILE

ATD Serial No: 634

Test I.D: D113764

Tested Parameter	Units	Specification	Result	Pass/Fail
Temperature	deg C	20.6 to 22.2	21.8	Pass
Relative Humidity	%	10 to 70	29	Pass
Probe Speed	m/s	6.59 to 6.83	6.77	Pass
Peak Deflection	mm	50 to 58	51	Pass
Peak Resistive Force w/in Deflection Corridor	kN	3.9 to 4.4	4.0	Pass
Internal Hysteresis	%	69 to 85	70	Pass
Peak Force 18 mm - 50 mm	N	<= 4,600 N	4140	Pass
Overall Test Results				Pass

Jessica Hall
Laboratory Technician


11/10/11
Test Date

David Winkelbauer
Approved By



Test Desc: Thorax Impact
Component ID: D113764

Test Date: 11/10/11
Velocity: 22.22 ft/s, 6.77 m/s

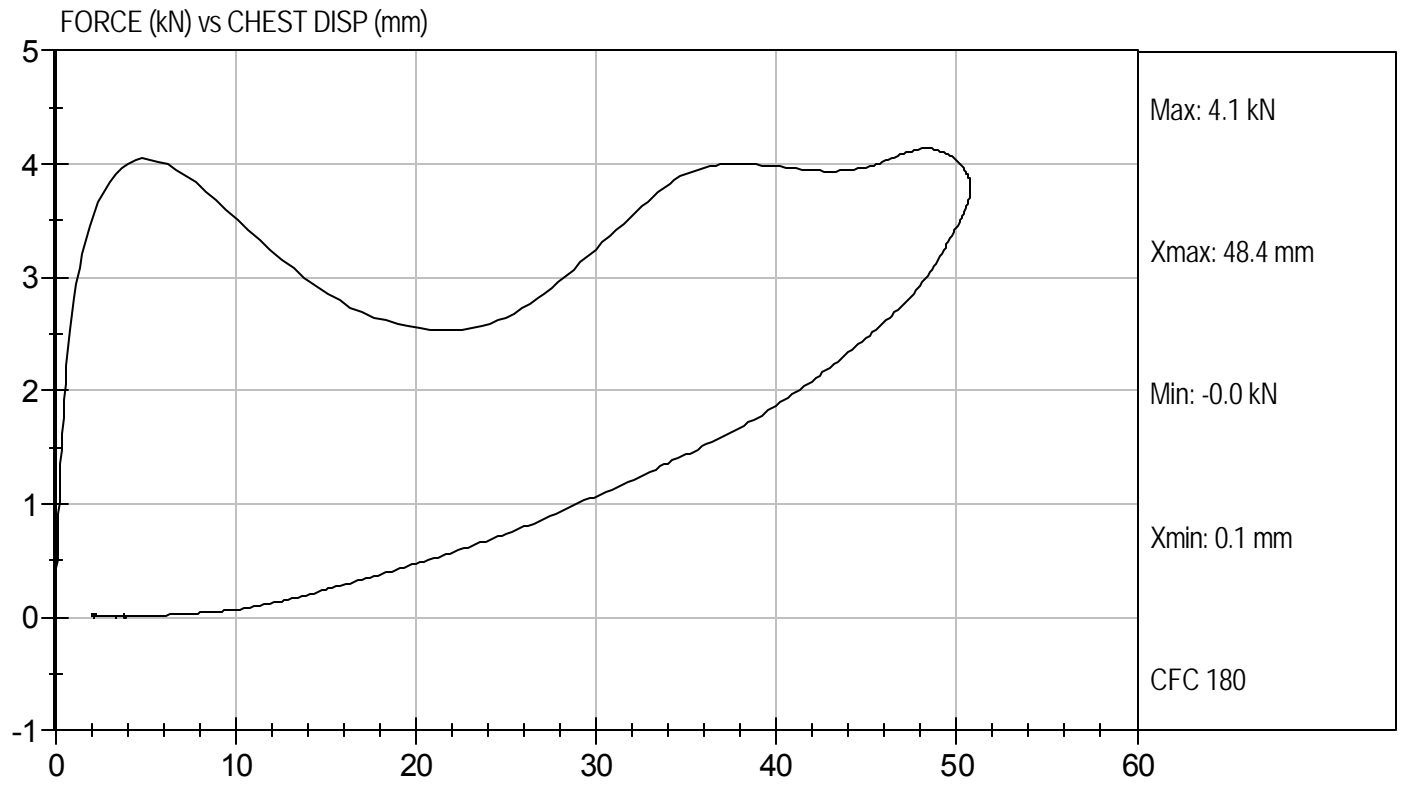

MGA RESEARCH CORPORATION
RIGHT KNEE IMPACT TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: 634

Test I.D: D113765

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.5	21.1	Pass
Laboratory Relative Humidity	%	10 to 70	28	Pass
Probe Speed	m/s	2.07 to 2.13	2.09	Pass
Maximum Force	kN	3.45 to 4.06	3.80	Pass
Overall Test Results				Pass

Jessica Hall

 Laboratory Technician

11/10/11

 Test Date


David Winkelbauer

 Approved By



Test Desc: Right Knee
Component ID: D113765

Test Date: 11/10/11
Velocity: 6.86 ft/s, 2.09 m/s

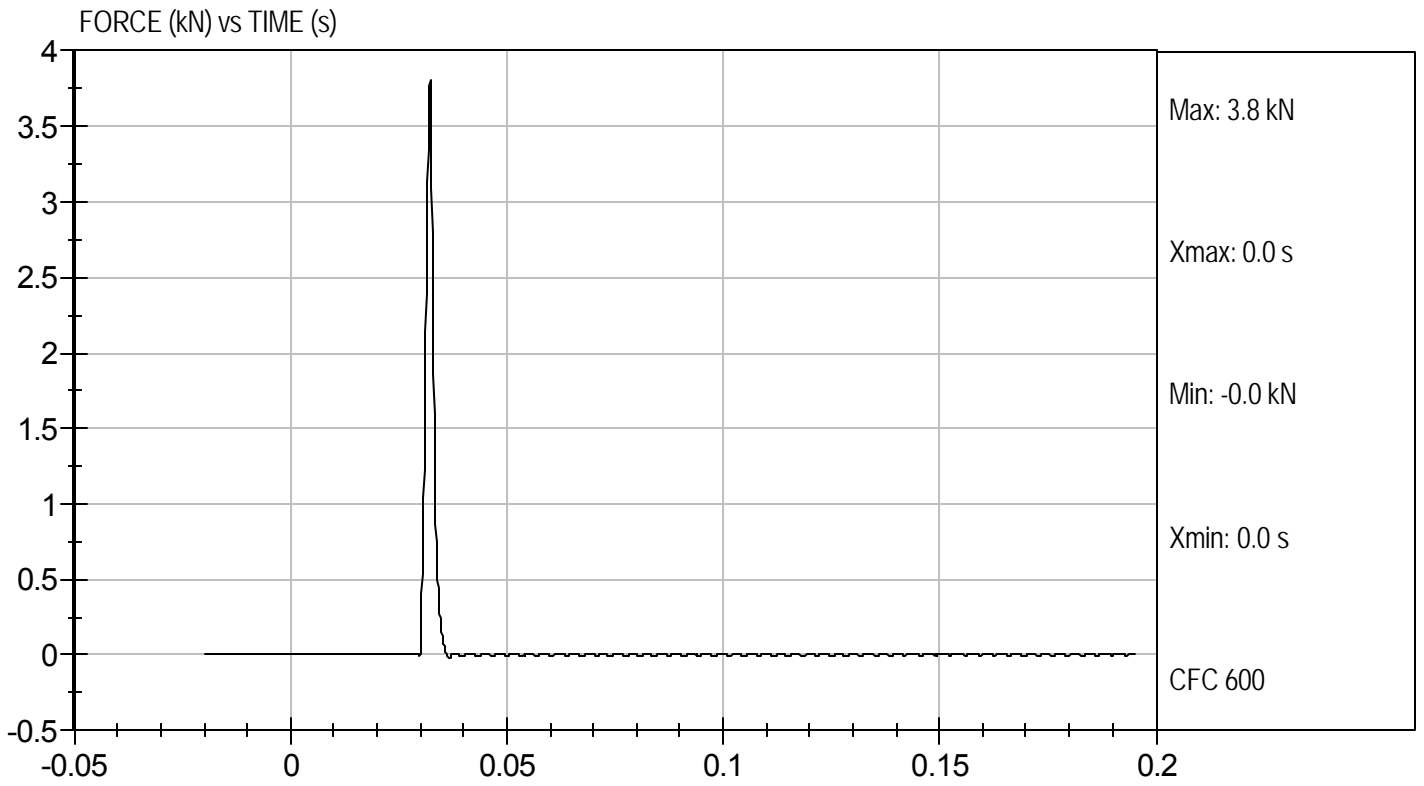

MGA RESEARCH CORPORATION
LEFT KNEE IMPACT TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: 634

Test I.D: D113766

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.5	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	28	Pass
Probe Speed	m/s	2.07 to 2.13	2.08	Pass
Maximum Force	kN	3.45 to 4.06	3.55	Pass
Overall Test Results				Pass

Jessica Hall
 Laboratory Technician


11/10/11
 Test Date

David Winkelbauer
 Approved By



Test Desc: Left Knee
Component ID: D113766

Test Date: 11/10/11
Velocity: 6.83 ft/s, 2.08 m/s

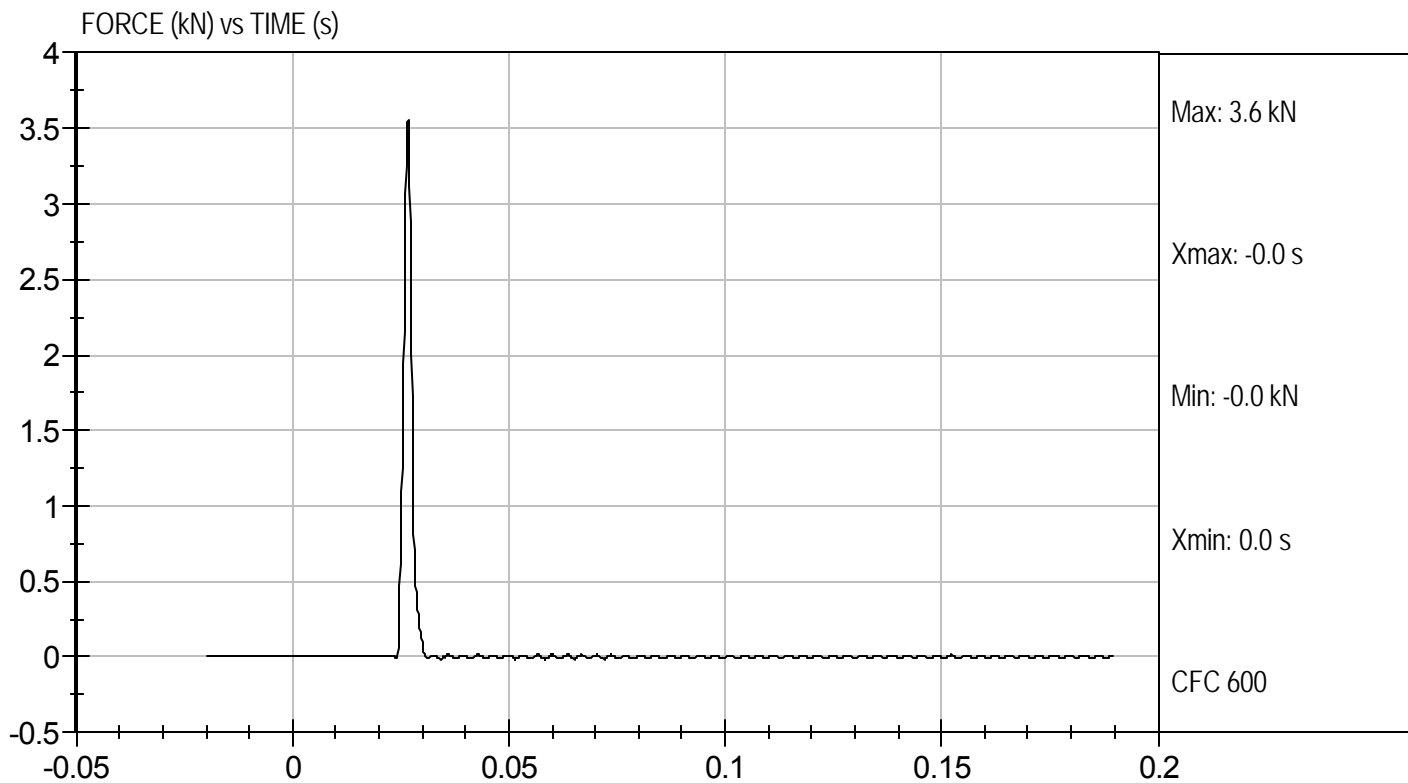

MGA RESEARCH CORPORATION
TORSO FLEXION TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: 634

Test I.D: D113767

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.5	Pass
Laboratory Relative Humidity	%	10 to 70	29	Pass
Initial Angle	deg	0 to 20	17	Pass
Return Angle	deg	+/- 8	7	Pass
Force at 45 deg	N	320 to 390	368	Pass
Upper Torso Deflection Rate	Deg/sec	0.5 to 1.5	1.0	Pass
Overall Result				Pass

Jessica Hall

 Laboratory Technician

11/10/11

 Test Date

David Winkelbauer

 Approved By

**MGA RESEARCH CORPORATION
HEAD DROP TEST
HYBRID III 5TH PERCENTILE**

ATD Serial No: 634

Test ID: D113901

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	21.9	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Peak Resultant Acceleration	G's	250 to 300	280	Pass
Peak Lateral Acceleration	G's	+/- 15	-4.1	Pass
Unimodal	N/A	Yes	Yes	Pass
Oscillations	N/A	within 10% of peak	Yes	Pass
Overall Test Results				Pass

Jessica Gall
Laboratory Technician



11/22/11
Test Date

David Winkelbauer
Approved By



Test Desc: Head Drop
Component ID: D113901

Test Date: 11/22/11
Velocity: 0 ft/s, 0 m/s

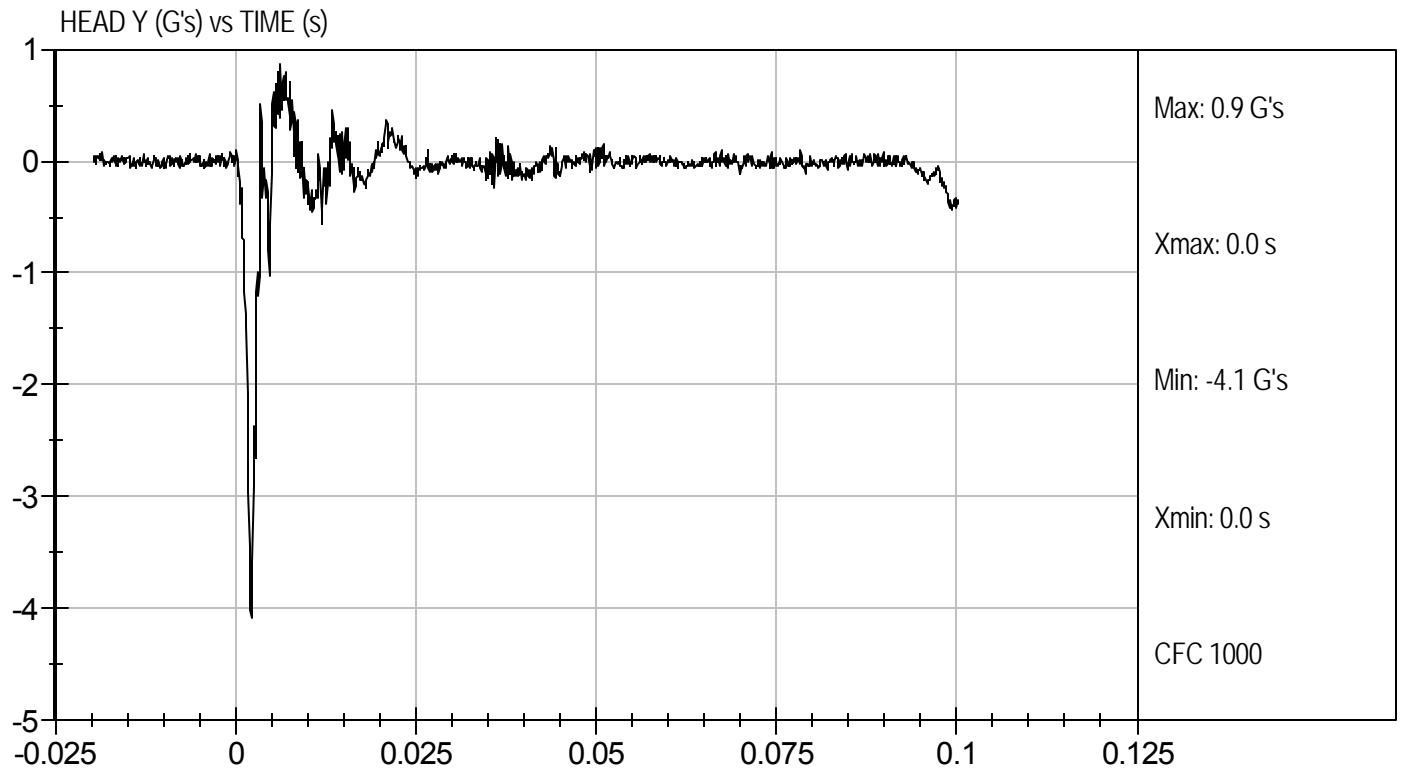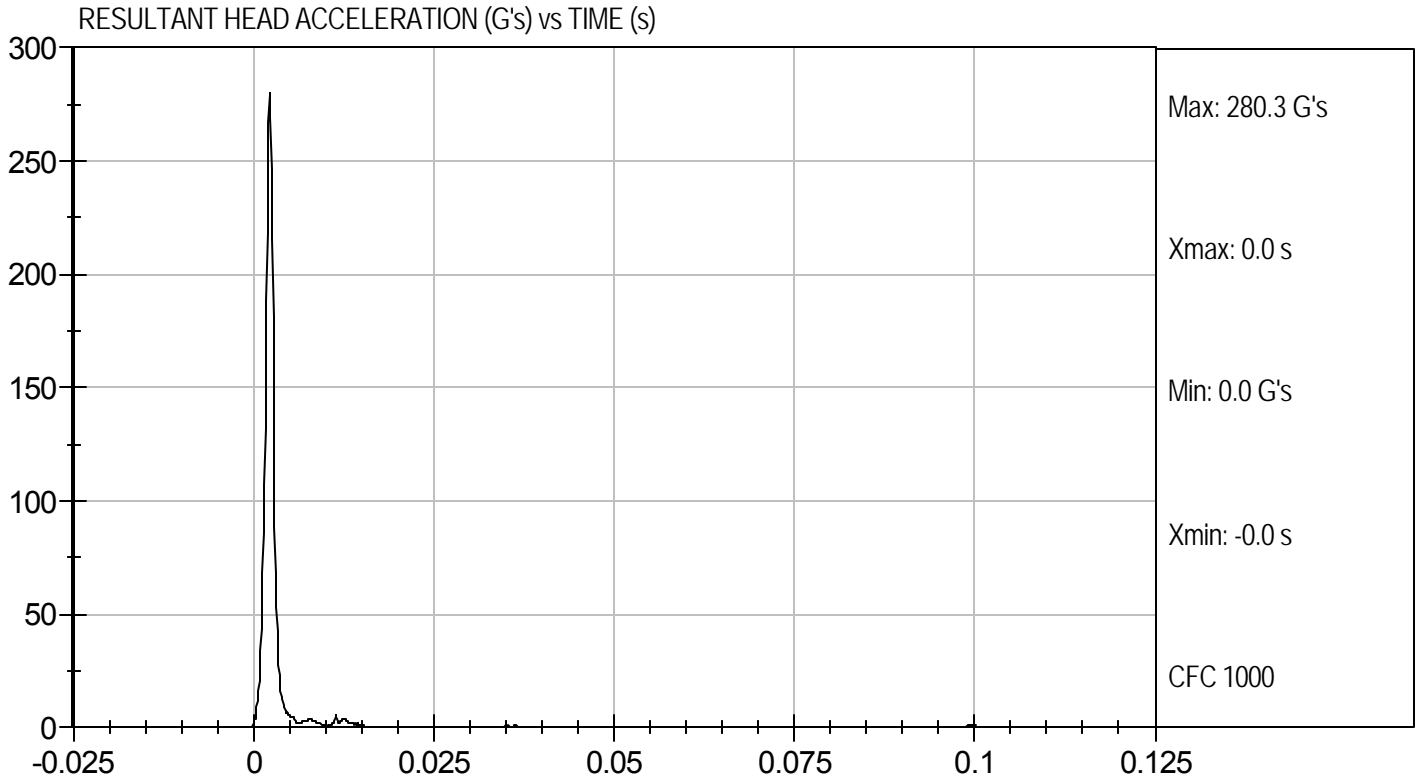

MGA RESEARCH CORPORATION
NECK FLEXION TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: 634

Test I.D.: D113902

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.8	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Speed		m/s	6.89 to 7.13	7.05	Pass
Pendulum Pulse	10 ms	m/s	2.1 to 2.5	2.3	Pass
	20 ms	m/s	4.0 to 5.0	4.4	Pass
	30 ms	m/s	5.8 to 7.0	6.0	Pass
D Plane Rotation	Max	deg	77 to 91	82	Pass
Occipital Condyle Moment within Deflection Corridor		Nm	69 to 83	71	Pass
Positive Moment Time Curve Decay to 10 Nm		ms	80 to 100	88	Pass
				Overall Results	Pass

Jessica Hall
Laboratory Technician

11/22/11
Test Date


David Winkelbauer
Approved By




Test Desc: Neck Flexion
Component ID: D113902

Test Date: 11/22/11
Velocity: 23.14 ft/s, 7.05 m/s

PENDULUM VELOCITY (m/s) vs TIME (s)

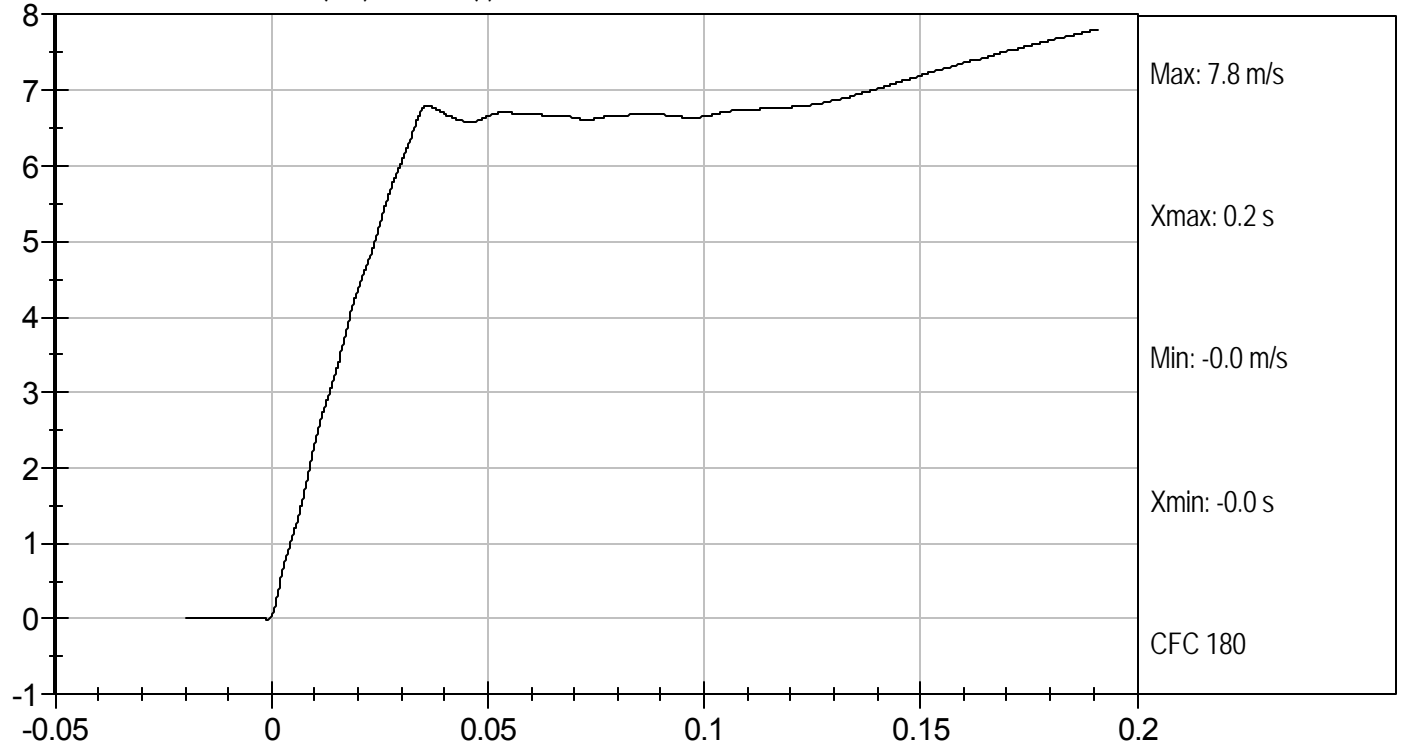


NECK ROTATION (DEG) vs TIME (s)

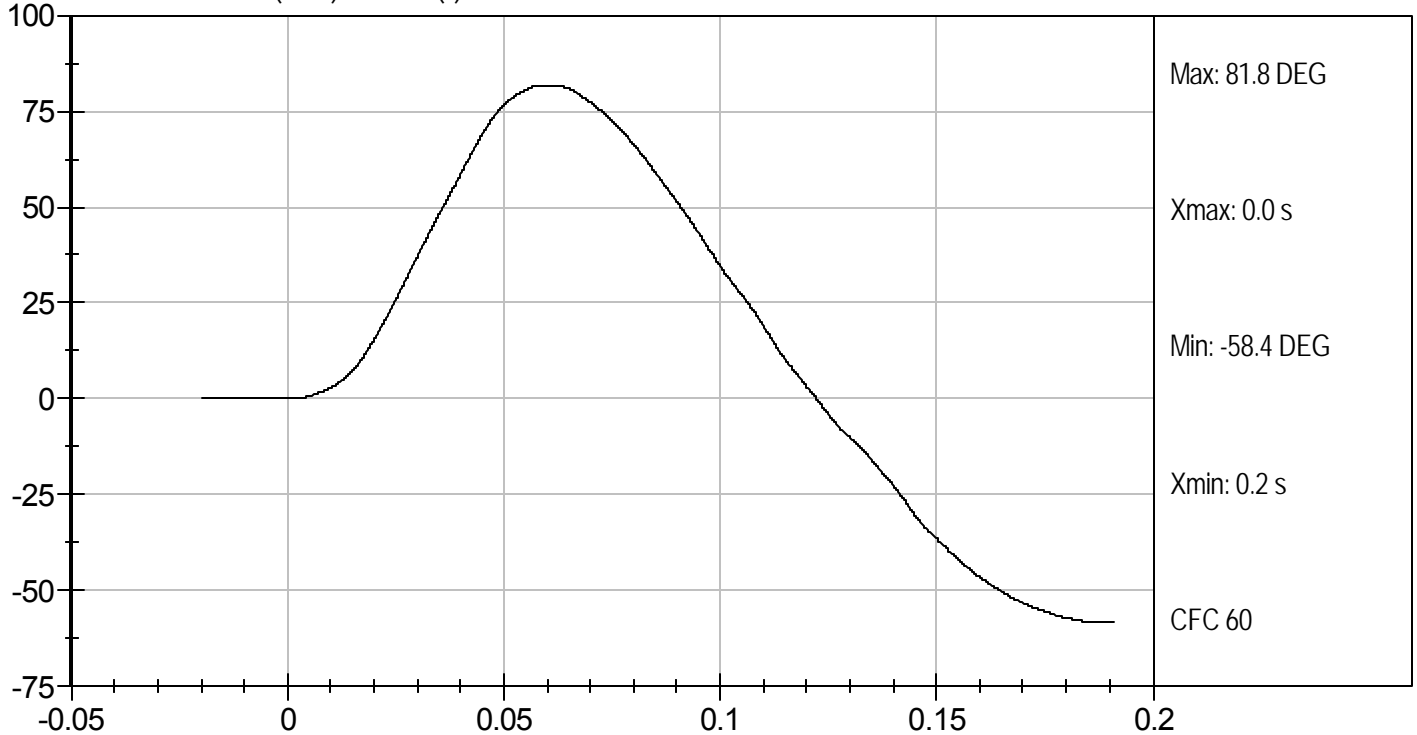



Test Desc: Neck Flexion
Component ID: D113902

Test Date: 11/22/11
Velocity: 23.14 ft/s, 7.05 m/s

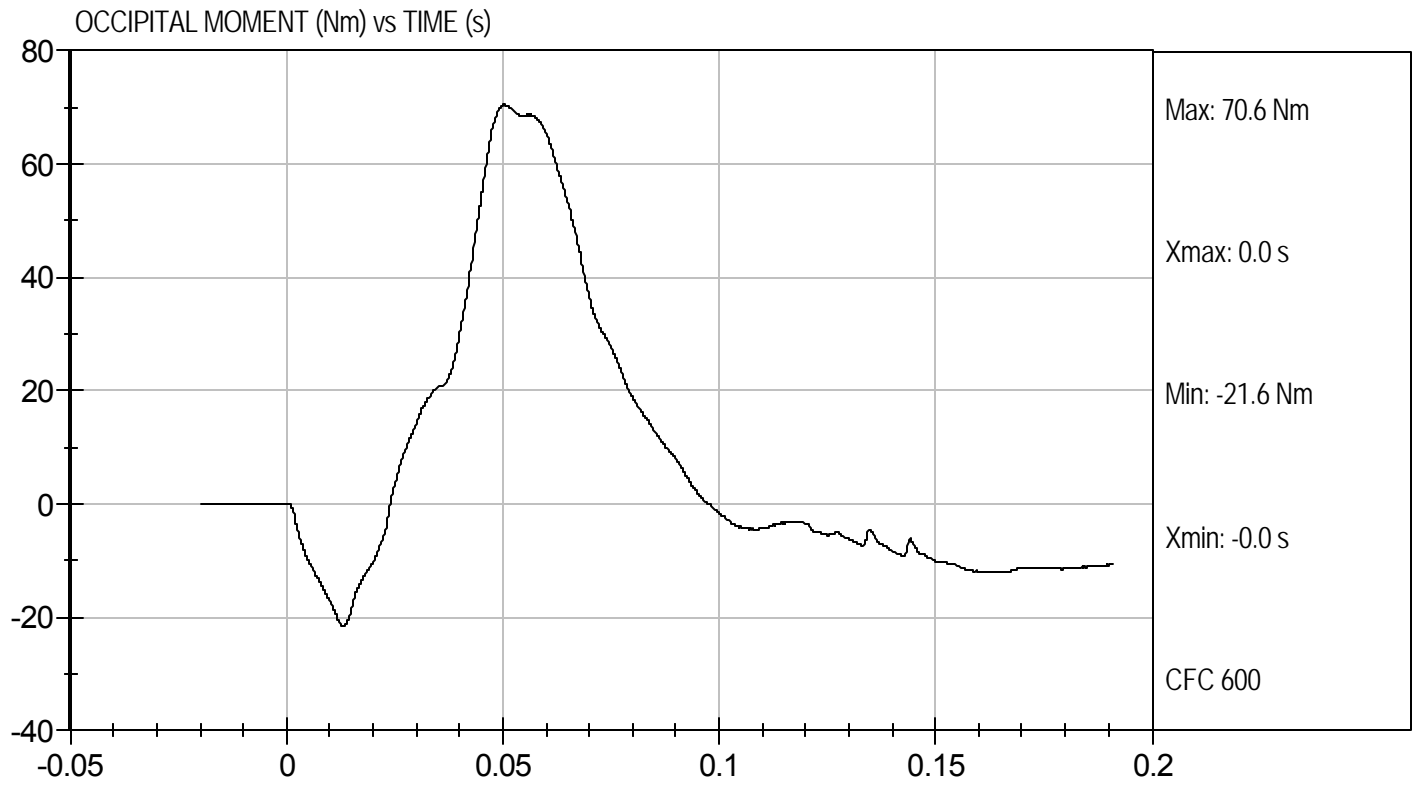

MGA RESEARCH CORPORATION
NECK EXTENSION TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: 634

Test I.D.: D113903

Tested Parameter		Units	Specification	Result	Pass/Fail
Laboratory Temperature		deg C	20.6 to 22.2	21.8	Pass
Laboratory Relative Humidity		%	10 to 70	30	Pass
Pendulum Speed		m/s	5.95 to 6.19	6.12	Pass
Pendulum Pulse	10 ms	m/s	1.5 to 1.9	1.8	Pass
	20 ms	m/s	3.1 to 3.9	3.6	Pass
	30 ms	m/s	4.6 to 5.6	5.1	Pass
D Plane Rotation	Max	deg	99 to 114	111	Pass
Occipital Condyle Moment within Deflection Corridor		Nm	-65 to -53	-55	Pass
Negative Moment Time Curve Decay to -10 Nm		ms	94 to 114	103	Pass
Overall Results					Pass

Jessica Hall
Laboratory Technician



11/22/11
Test Date

David Winkelbauer
Approved By



Test Desc: Neck Extension
Component ID: D113903


Test Date: 11/22/11
Velocity: 20.08 ft/s, 6.12 m/s

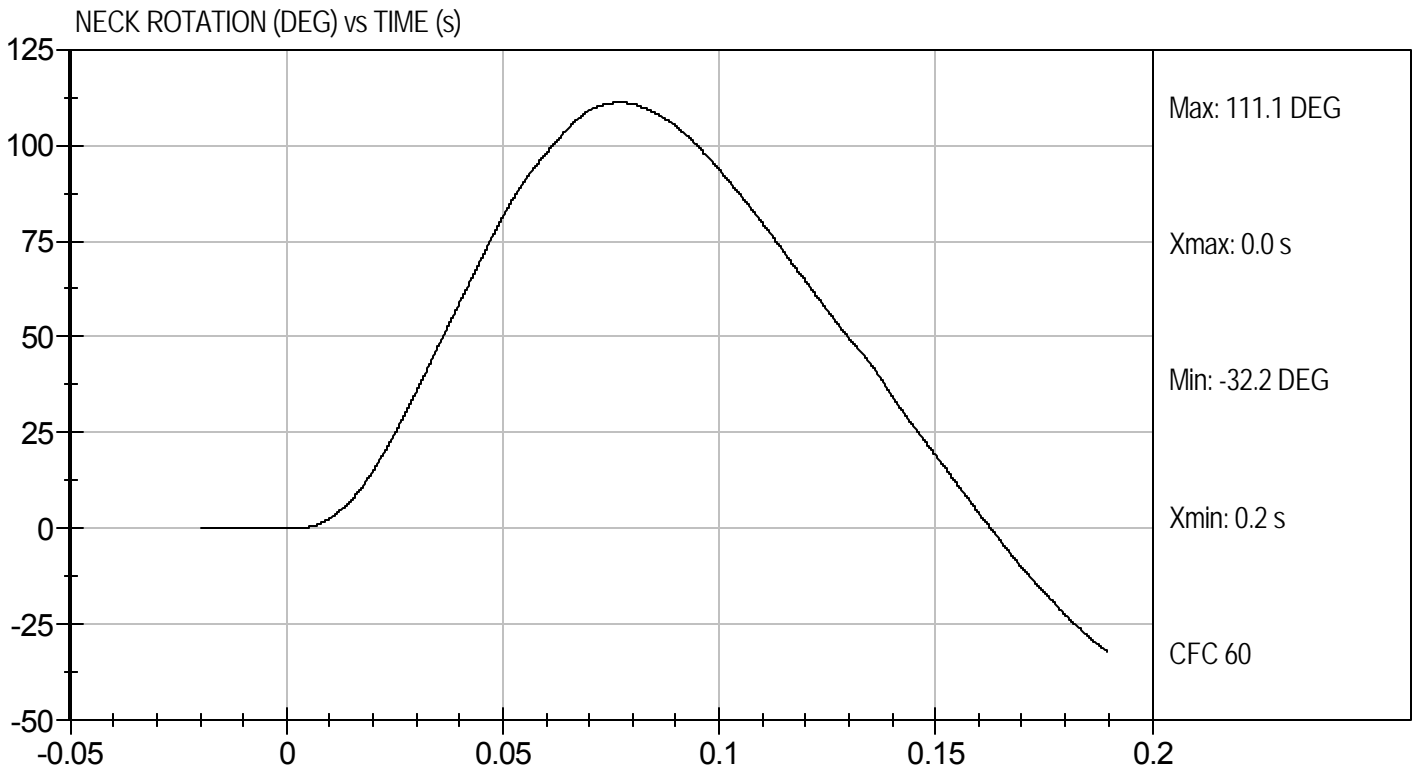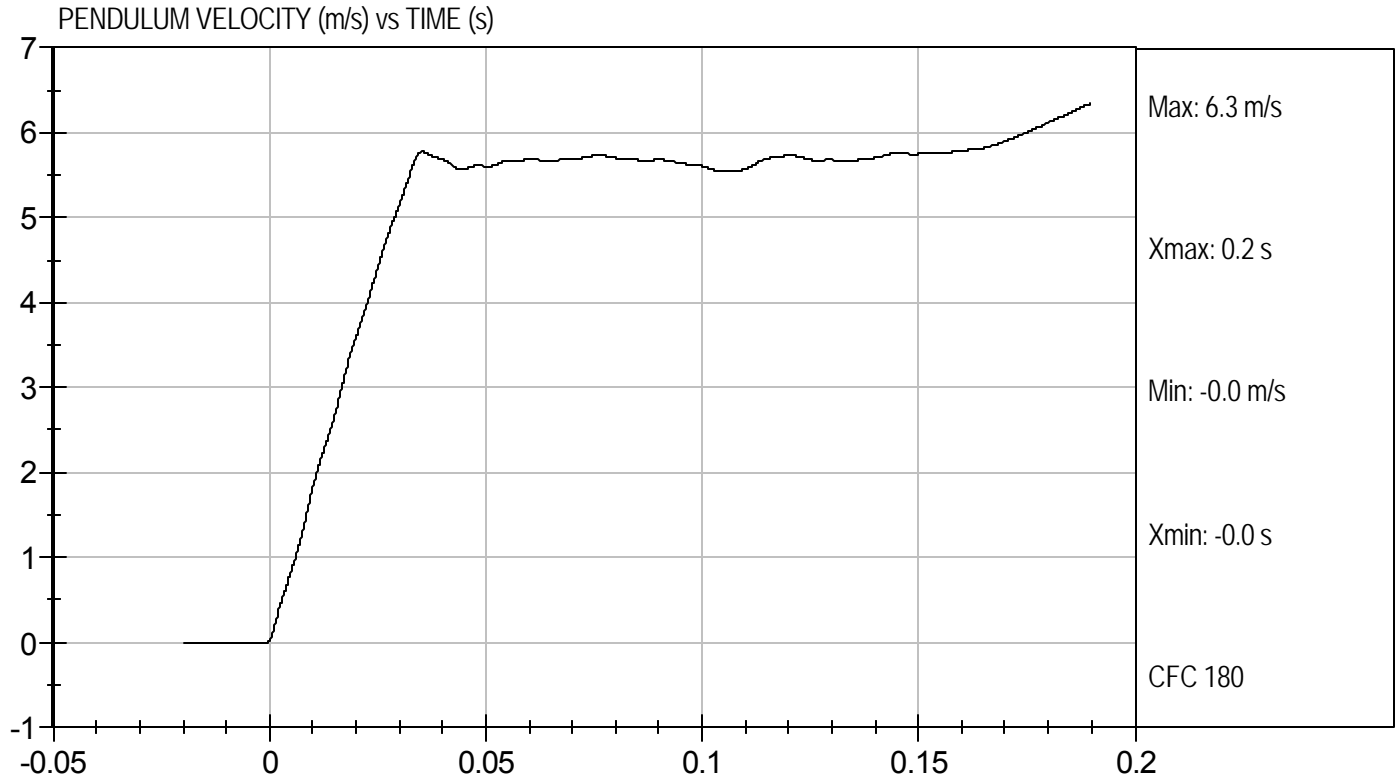



Test Desc: Neck Extension
Component ID: D113903

Test Date: 11/22/11
Velocity: 20.08 ft/s, 6.12 m/s

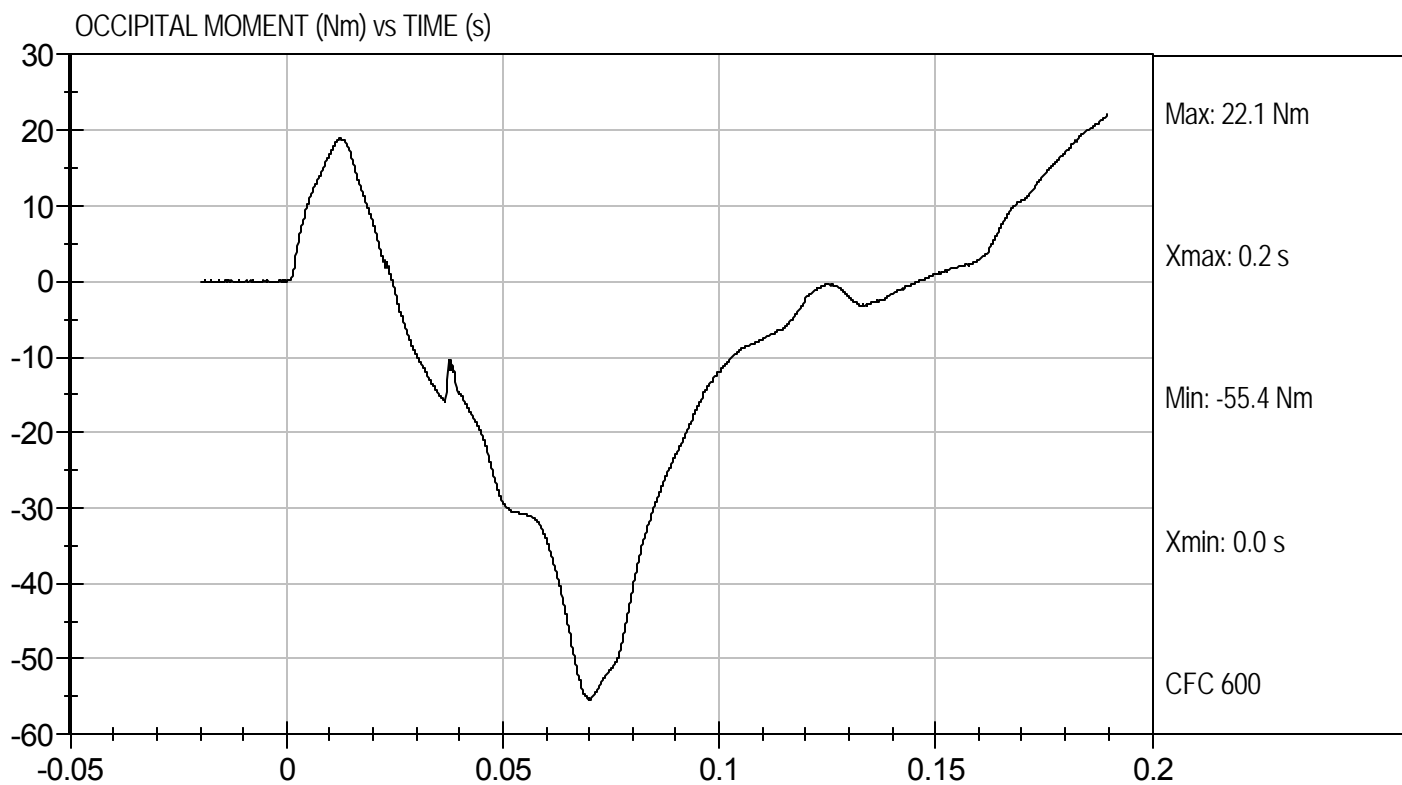

MGA RESEARCH CORPORATION
THORAX IMPACT
HYBRID III 5TH PERCENTILE

ATD Serial No: 634

Test I.D: D113904

Tested Parameter	Units	Specification	Result	Pass/Fail
Temperature	deg C	20.6 to 22.2	21.5	Pass
Relative Humidity	%	10 to 70	29	Pass
Probe Speed	m/s	6.59 to 6.83	6.77	Pass
Peak Deflection	mm	50 to 58	54	Pass
Peak Resistive Force w/in Deflection Corridor	kN	3.9 to 4.4	4.1	Pass
Internal Hysteresis	%	69 to 85	69	Pass
Peak Force 18 mm - 50 mm	N	<= 4,600 N	4101	Pass
Overall Test Results				Pass

Jessica Gall
 Laboratory Technician


11/22/11
 Test Date

David Winkelbauer
 Approved By



Test Desc: Thorax Impact
Component ID: D113904

Test Date: 11/22/11
Velocity: 22.2 ft/s, 6.77 m/s

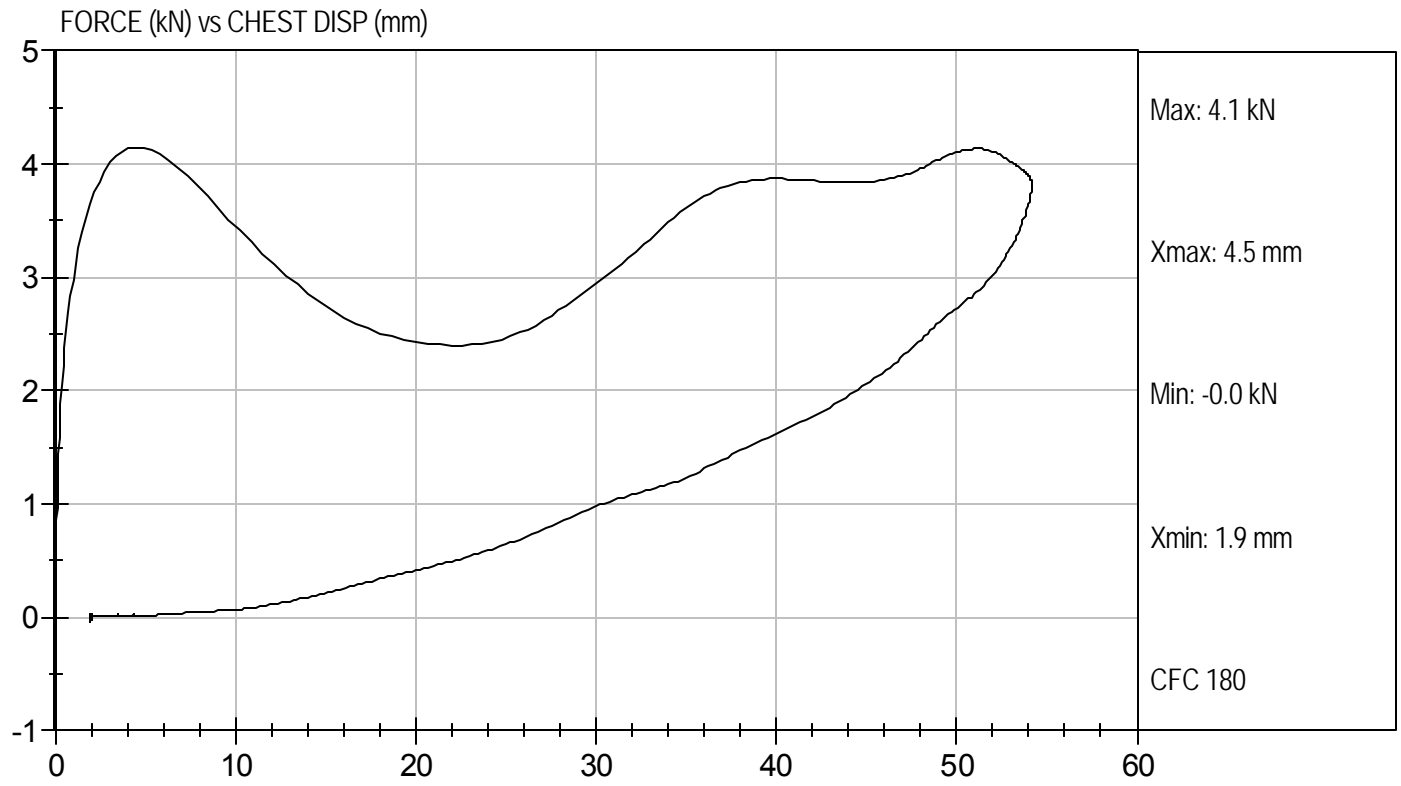

MGA RESEARCH CORPORATION
RIGHT KNEE IMPACT TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: 634

Test I.D: D113905

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.5	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	29	Pass
Probe Speed	m/s	2.07 to 2.13	2.09	Pass
Maximum Force	kN	3.45 to 4.06	3.96	Pass
Overall Test Results				Pass

Jessica Hall
 Laboratory Technician


11/22/11
 Test Date

David Winkelbauer
 Approved By



Test Desc: Right Knee
Component ID: D113905

Test Date: 11/22/11
Velocity: 6.85 ft/s, 2.09 m/s

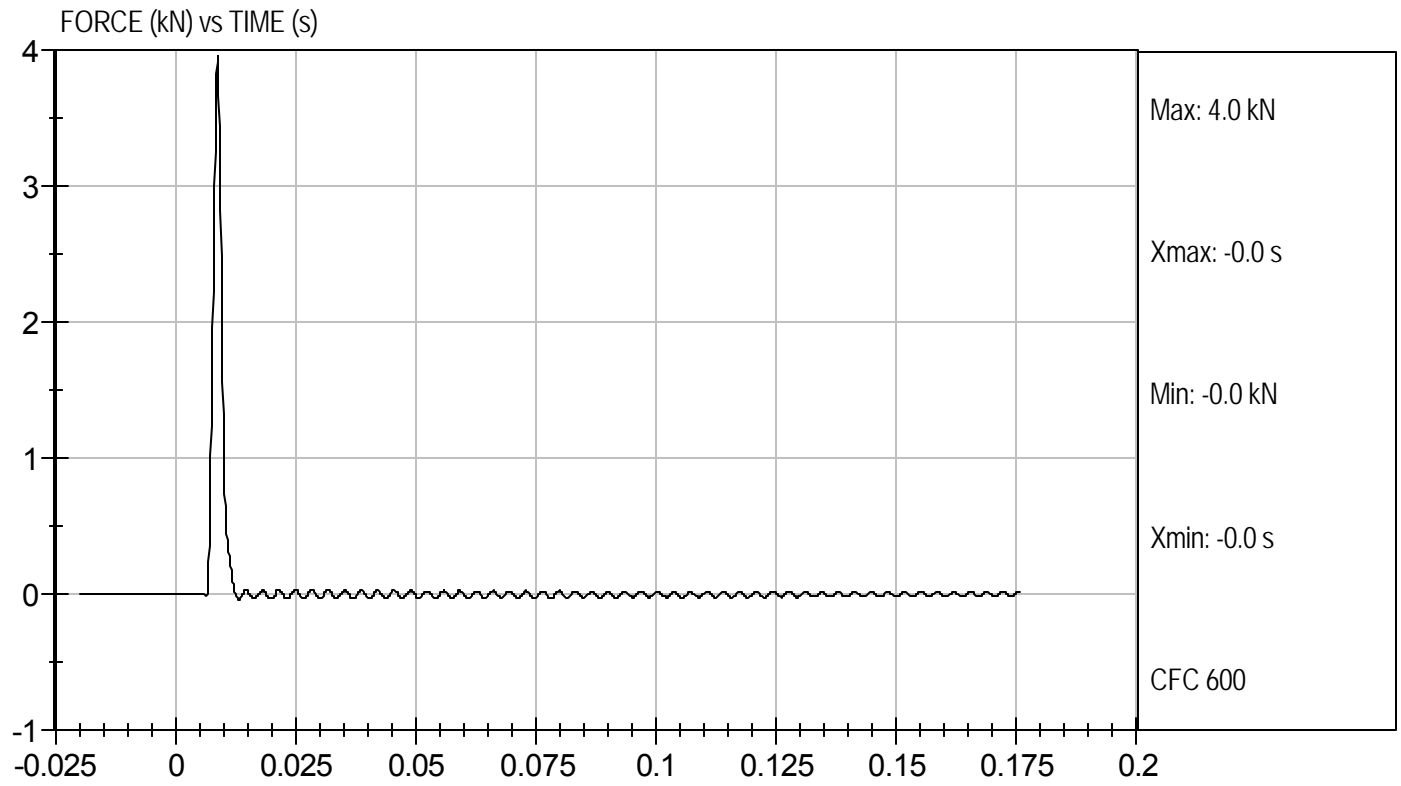

MGA RESEARCH CORPORATION
LEFT KNEE IMPACT TEST
HYBRID III 5TH PERCENTILE

ATD Serial No: 634

Test I.D: D113906

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.5	21.2	Pass
Laboratory Relative Humidity	%	10 to 70	29	Pass
Probe Speed	m/s	2.07 to 2.13	2.09	Pass
Maximum Force	kN	3.45 to 4.06	4.02	Pass
Overall Test Results				Pass

Jessica Hall
Laboratory Technician


11/22/11
Test Date

David Winkelbauer
Approved By



Test Desc: Left Knee
Component ID: D113906

Test Date: 11/22/11
Velocity: 6.85 ft/s, 2.09 m/s

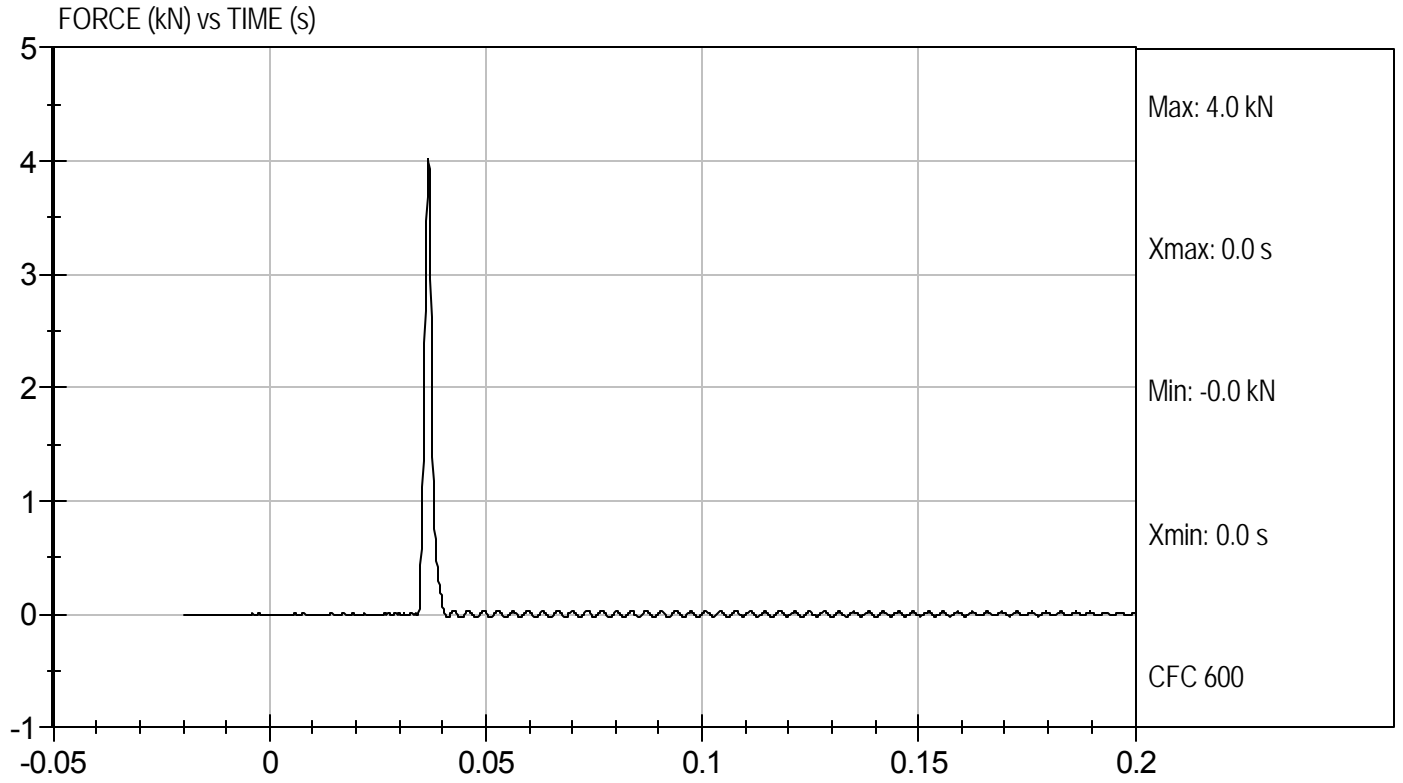

MGA RESEARCH CORPORATION
TORSO FLEXION TEST
HYBRID III 5TH PERCENTILE


ATD Serial No: 634

Test I.D: D113907

Tested Parameter	Units	Specification	Result	Pass/Fail
Laboratory Temperature	deg C	18.9 to 25.6	22.0	Pass
Laboratory Relative Humidity	%	10 to 70	30	Pass
Initial Angle	deg	0 to 20	16	Pass
Return Angle	deg	+/- 8	7	Pass
Force at 45 deg	N	320 to 390	346	Pass
Upper Torso Deflection Rate	Deg/sec	0.5 to 1.5	1.0	Pass
Overall Result				Pass


 Laboratory Technician

11/22/11
 Test Date


 Approved By