

REPORT NUMBER: SINCAP-CAL-16-001

**NEW CAR ASSESSMENT PROGRAM (NCAP)
MOVING DEFORMABLE BARRIER SIDE IMPACT TEST**

**Ford Motor Co.
2016 Ford Fiesta
Four Door Sedan**

NHTSA No: M20160205

**PREPARED BY:
CALSPAN CORPORATION
P.O. BOX 400
BUFFALO, NEW YORK 14225**



December 3, 2015

FINAL REPORT

**PREPARED FOR:
U.S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
OFFICE OF CRASHWORTHINESS STANDARDS
MAIL CODE: NVS-111
1200 NEW JERSEY AVE SE, ROOM W43-410
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Administration, in response to Contract Number DTNH22-14-D-00352.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof.

If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: Vanessa Hansen
Vanessa Hansen, Project Engineer

Date: December 3, 2015

Approved by: Edward Dutton
Edward Dutton, Test Engineer
Transportation Test Operations

Date: December 3, 2015

FINAL REPORT ACCEPTANCE BY OCWS:

Division Chief, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

COTR, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

TECHNICAL REPORT DOCUMENTATION PAGE

1. Report No. SINCAP-CAL-16-001	2. Government Accession No.	3. Recipient's Catalog No.																												
4. Title and Subtitle Final Report of New Car Assessment Program Side Impact MDB Testing of a 2016 Ford Fiesta four door sedan NHTSA No.: M20160205		5. Report Date December 3, 2015																												
		6. Performing Organization Code CAL																												
Vanessa Hansen, Test Engineer Edward Dutton, Senior Test Engineer		8. Performing Organization Report No. CAL-DOT-2016-001																												
9. Performing Organization Name and Address Calspan Corporation Transportation Test Operations P.O. Box 400 Buffalo, New York 14225		10. Work Unit No.																												
		11. Contract or Grant No. DTNH22-14-D-00352																												
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards (NVS-111) 1200 New Jersey Ave., SE, Room W43-410 Washington, D.C. 20590		13. Type of Report and Period Covered: Final Test Report October 26, 2015 - December 3, 2015																												
		14. Sponsoring Agency Code NVS-111																												
15. Supplementary Notes																														
16. Abstract A 55/28, (61.90 kph / 38.5 mph), 90 ^o Moving Deformable Barrier NCAP Side Impact Test was conducted on the subject 2016 Ford Fiesta four door sedan in accordance with the specifications of the Office of Crashworthiness Standards Test Procedure for the generation of consumer information on vehicle side crash protection. This test was conducted at Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on October 26, 2015. The impact velocity of the Moving Deformable Barrier (MDB) was 61.4 km/h, and the ambient temperature at the struck (driver's) side of the target vehicle at the time of impact was 21°C. The target vehicle's maximum post-test static crush was 205 mm located at level 2. The test vehicle's occupant performance data is as follows:																														
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2" style="width: 50%;">Measurement Description</th> <th colspan="3" style="text-align: center;">Driver ATD (ES-2re)</th> </tr> <tr> <th style="width: 10%;">Units</th> <th style="width: 10%;">IARV</th> <th style="width: 10%;">Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC₃₆)</td> <td>N/A</td> <td>1000</td> <td style="background-color: yellow;">129.504</td> </tr> <tr> <td>Maximum Thoracic Rib Deflection</td> <td>mm</td> <td>44</td> <td style="background-color: yellow;">30.427</td> </tr> <tr> <td>Total Abdominal Force</td> <td>N</td> <td>2500</td> <td style="background-color: yellow;">933.018</td> </tr> <tr> <td>Pubic Symphysis Force</td> <td>N</td> <td>6000</td> <td style="background-color: yellow;">1837.772</td> </tr> </tbody> </table>				Measurement Description	Driver ATD (ES-2re)			Units	IARV	Result	Head Injury Criteria (HIC ₃₆)	N/A	1000	129.504	Maximum Thoracic Rib Deflection	mm	44	30.427	Total Abdominal Force	N	2500	933.018	Pubic Symphysis Force	N	6000	1837.772				
Measurement Description	Driver ATD (ES-2re)																													
	Units	IARV	Result																											
Head Injury Criteria (HIC ₃₆)	N/A	1000	129.504																											
Maximum Thoracic Rib Deflection	mm	44	30.427																											
Total Abdominal Force	N	2500	933.018																											
Pubic Symphysis Force	N	6000	1837.772																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2" style="width: 50%;">Measurement Description</th> <th colspan="3" style="text-align: center;">Passenger ATD (SID-IIs)</th> </tr> <tr> <th style="width: 10%;">Units</th> <th style="width: 10%;">IARV</th> <th style="width: 10%;">Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC₃₆)</td> <td>N/A</td> <td>1000</td> <td style="background-color: yellow;">306.892</td> </tr> <tr> <td>Lower Spine Resultant Acceleration</td> <td>G</td> <td>82</td> <td style="background-color: yellow;">95.747</td> </tr> <tr> <td>Total Pelvic Force (sum of acetabular and iliac forces)</td> <td>N</td> <td>5525</td> <td style="background-color: yellow;">4002.058</td> </tr> <tr> <td>Maximum Thoracic Rib Deflection</td> <td>mm</td> <td>38*</td> <td style="background-color: yellow;">36.230</td> </tr> <tr> <td>Maximum Abdominal Rib Deflection</td> <td>mm</td> <td>45*</td> <td style="background-color: yellow;">24.577**</td> </tr> </tbody> </table>				Measurement Description	Passenger ATD (SID-IIs)			Units	IARV	Result	Head Injury Criteria (HIC ₃₆)	N/A	1000	306.892	Lower Spine Resultant Acceleration	G	82	95.747	Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	4002.058	Maximum Thoracic Rib Deflection	mm	38*	36.230	Maximum Abdominal Rib Deflection	mm	45*	24.577**
Measurement Description	Passenger ATD (SID-IIs)																													
	Units	IARV	Result																											
Head Injury Criteria (HIC ₃₆)	N/A	1000	306.892																											
Lower Spine Resultant Acceleration	G	82	95.747																											
Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	4002.058																											
Maximum Thoracic Rib Deflection	mm	38*	36.230																											
Maximum Abdominal Rib Deflection	mm	45*	24.577**																											
<p>* Proposed IARV ** Lower abdominal Rib, questionable data</p> <p>The two doors on the struck side of the vehicle did not separate from the body at the hinges or latches and the opposite doors did not open during the side impact event.</p>																														
17. Key Words New Car Assessment Program (NCAP) Side Impact MDB ES-2re SID-IIs		18. Distribution Statement <u>Copies of this report are available from:</u> National Highway Traffic Safety Administration Technical Information Services Division, NPO-411 1200 New Jersey Ave. SE Washington, D.C. 20590 e-mail: tis@nhtsa.dot.gov FAX: 202-493-2833																												
19. Security Class. (of this report) UNCLASSIFIED	20. Security Class. (of this page) UNCLASSIFIED	21. No. of Pages 186	22. Price																											

TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
1	Test Purpose and Procedure	1-1
2	Summary of Test Results	2-1
3	Occupant and Vehicle Information	3-1
 <u>Data Sheet</u>		 <u>Page</u>
1	General Test and Vehicle Parameter Data	3-2
2	Seat, Seat Belt, Steering Wheel Adjustment and Fuel System Data	3-6
3	Dummy Longitudinal Clearance Dimensions	3-11
4	Dummy Lateral Clearance Dimensions	3-12
5	Camera and Instrumentation Data	3-13
6	Test Vehicle Accelerometer Locations	3-14
7	MDB Accelerometer Locations	3-15
8	Post-Test Observations	3-16
9	MDB Summary of Results	3-18
10	Test Vehicle Profile Measurements	3-19
11	Test Vehicle Exterior Crush Measurements	3-20
12	MDB Exterior Static Crush Measurements	3-23
13	FMVSS No. 301 Static Rollover Results	3-24
14	Dummy/Vehicle Temperature and Humidity Stabilization Data	3-25
 <u>Appendix</u>		 <u>Page</u>
A	Photographs	A-1
B	Vehicle and Dummy Response Data Plots	B-1
C	Dummy Configuration and Performance Verification Data	C-1
D	Test Equipment and Instrumentation Calibration Data	D-1

SECTION 1

TEST PURPOSE AND PROCEDURE

This moving deformable barrier side impact test is part of the MY 2016 New Car Assessment Program Side Impact Test Program, sponsored by the National Highway Traffic Safety Administration (NHTSA), under contract number DTNH22-14-D-00352. The purpose of this test is to generate comparative side impact performance in a 2016 Ford Fiesta four door sedan. The side impact test was conducted in accordance with the Office of Crashworthiness Standard's Laboratory Test Procedure dated August 2013.

SECTION 2

SUMMARY OF TEST RESULTS

A 2016 Ford Fiesta four door sedan was impacted on the left (driver's) side by a Moving Deformable Barrier (MDB) which was moving forward in a 27° crabbed position to the tow road guidance system at a velocity of 61.4 km/h. The target vehicle was stationary and was positioned at an angle of 63° to the line of forward motion. The side impact test was conducted by the Calspan Corporation's Transportation Test Operations Center in Buffalo, New York on October 26, 2015. Pre-test and post-test photographs of the test vehicle, the MDB and the dummies (ES-2re and SID-IIs) are included in this report.

Dummies were placed in the driver and left rear designated seating positions according to instructions specified in the OCWS Side Impact Laboratory Test Procedure, dated August 2013. The side impact event was documented by 9 high-speed and 2 real-time cameras. Camera locations are included in this report.

The Dummies were instrumented in the following manner:

DRIVER ATD (ES-2re)

Primary and redundant head CG tri-axial accelerometers

Chest upper rib, middle rib, and lower rib y-axis displacement potentiometers

Abdomen forward, middle, and rear y-axis load cells

Lower spine (T12) tri-axial accelerometers

Public symphysis y-axis load cell

PASSENGER ATD (SID-IIs)

Primary and redundant head CG tri-axial accelerometers

Chest upper rib, middle rib, and lower rib y-axis displacement potentiometers

Abdomen upper rib and lower rib y-axis displacement potentiometers

Lower spine (T12) tri-axial accelerometers

Acetabulum and iliac wing y-axis load cells

Appendix B contains the vehicle and dummy response data. Dummy configuration and performance verification data can be found in APPENDIX C of this report. Appendix D of this report contains the test equipment and instrumentation calibration data.

DUMMY INJURY VALUES

Measurement Description	Driver ATD (ES-2re)		
	Units	Threshold	Result
Head Injury Criteria (HIC36)		1000	129.504
Maximum Thorax Rib Deflection	mm	44	30.427
Combined Abdominal Force	N	2500	933.018
Pubic Symphysis Force	N	6000	1837.772

Measurement Description	Passenger ATD (SID-IIs)		
	Units	Threshold	Result
Head Injury Criteria (HIC36)		1000	306.892
Lower Spine (T12) Resultant Acceleration	G	82	95.747
Total Pelvic Force (sum of acetabular and iliac forces)	N	5525	4002.058
Maximum Thoracic Rib Deflection	mm	38*	36.230
Maximum Abdominal Rib Deflection	mm	45*	24.577**

*Proposed IARV

** Lower abdominal rib, questionable data

SUPPLEMENTAL RESTRAINT INFORMATION

Restraint Type	Left Front (Driver) Occupant Location 1		Left Rear (Passenger) Occupant Location 4	
	Mounted	Deployed	Mounted	Deployed
Frontal Airbag	Yes	No		
Knee Airbag	Yes	No		
Side Airbag 1 - Curtain	Yes	Yes	Yes	Yes
Side Airbag 2 – Torso/Pelvis Airbag	Yes	Yes	No	N/A
Seat Belt Pretensioner	Yes	Yes	No	N/A
Seat Belt Load Limiter	Yes	Yes	No	N/A
Other				

GENERAL COMMENTS:

1. P1 serial number – F034
2. P4 serial number - 303

Data Anomalies:

- Rear Passenger Abdomen Lower Rib Y Displacement , Questionable Data 36ms - 45ms
- Engine Top X Acceleration, Questionable Data throughout
- Engine Top Y Acceleration, Questionable Data throughout
- Vehicle CG X Acceleration, Questionable data throughout
- Vehicle CG Y Acceleration, Questionable data throughout
- Right Rear Sill Z Acceleration, Questionable magnitude throughout
- Left Rear Seat Track/Structure Y Acceleration, Questionable data throughout
- Right Rear Compartment Y Acceleration, Questionable magnitude throughout
- Rear Floorpan X Acceleration, Questionable data throughout
- Rear Floorpan Y Acceleration, Questionable data throughout
- Rear Floorpan Z Acceleration, Questionable data throughout

SECTION 3
OCCUPANT AND VEHICLE INFORMATION

This section contains information reporting for the following Data Sheets:

Data Sheet No. 1 - General Test and Vehicle Parameter Data

Data Sheet No. 2 – Seat, Seat Belt, Steering Wheel Adjustment and Fuel System Data

Data Sheet No. 3 – Dummy Longitudinal Clearance Dimensions

Data Sheet No. 4 – Dummy Lateral Clearance Dimensions

Data Sheet No. 5 – Camera and Instrumentation Data

Data Sheet No. 6 – Test Vehicle Accelerometer Locations

Data Sheet No. 7 – MDB Accelerometer Locations

Data Sheet No. 8 – Post-Test Observations

Data Sheet No. 9 – MDB Summary of Results

Data Sheet No. 10 – Test Vehicle Profile Measurements

Data Sheet No. 11 – Test Vehicle Exterior Crush Measurements

Data Sheet No. 12 – MDB Exterior Static Crush Measurements

Data Sheet No. 13 – Vehicle and MDB Damage Profile Distances

Data Sheet No. 14 – FMVSS No. 301 Static Rollover Results

Data Sheet No. 15 – Dummy/Vehicle Temperature and Humidity Stabilization Data

**DATA SHEET NO. 1
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2016 Ford Fiesta four door sedan
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20160205
 Test Date: 10/26/2015

TEST VEHICLE INFORMATION AND OPTIONS

NHTSA No.	M20160205
Model Year	2016
Make	Ford
Model	Fiesta
Body Style	Four door sedan
VIN	3FADP4AJ8GM103059
Body Color	Silver
Odometer Reading (km/mi)	196.34 km / 122 mi
Engine Displacement (L)	1.6
Type/No. Cylinders	I4
Engine Placement	Transverse
Transmission Type	Manual
Transmission Speeds	5-Speed
Overdrive	Yes
Final Drive	Front Wheel Drive
Roof Rack	No
Sunroof/T-Top	No
Running Boards	No
Tilt Steering Wheel	Yes
Power Seats	No
Anti-Lock Brakes (ABS)	Yes

Traction Control System (TCS)	Yes
Auto-Leveling System	No
Automatic Door Locks (ADL)	Yes
Power Window Auto-Reverse	No
Other Optional Feature	-
Driver Front Airbag	Yes
Driver Curtain Airbag	Yes
Driver Head/Torso Airbag	No
Driver Torso Airbag	No
Driver Torso/Pelvis Airbag	Yes
Driver Pelvis Airbag	No
Driver Knee Airbag	Yes
Rear Pass. Curtain Airbag	Yes
Rear Pass. Head/Torso Airbag	No
Rear Pass. Torso Airbag	No
Rear Pass. Torso/Pelvis Airbag	No
Rear Pass. Pelvis Airbag	No
Driver Seat Belt Pretensioners	Yes
Rear Pass. Seat Belt Pretensioners	No
Driver Load Limiter	Yes
Rear Pass. Load Limiter	No
Other Safety Restraint	-

Does owner's manual provide instructions to turn off automatic door locks? Yes

DATA FROM CERTIFICATION LABEL

Manufactured By	Ford Motor Co.
Date of Manufacture	07/15
Vehicle Type	Passenger

GVWR (kg)	1642
GAWR Front (kg)	839
GAWR Rear (kg)	816

VEHICLE SEATING AND WEIGHT CAPACITY DATA

Measured Parameter	Front	Rear	Third	Total		
Designated Seating Capacity (DSC)	2	3	-	5		
Capacity Weight (VCW) (kg)					375	(A)
DSC X 68.04 kg					340.2	(B)
Cargo Weight (RCLW) (kg)					34.8	(A-B)

VEHICLE SEAT TYPE

Seating Location	Type of Seat Pan				Type of Seat Back		
	Bucket	Bench	Split Bench	Contoured	Fixed	Adjustable	
						W/ Lever	W/ Knob
Front Seat	X					X	
Rear or Second Row Seat		X			X		
Third Row seat							


DATA SHEET NO. 1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2016 Ford Fiesta four door sedan
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20160205
 Test Date: 10/26/2015

VEHICLE TIRE INFORMATION

Collected for year, make, model, & VIN, all items circled in red, tire manufacturer and tire name.

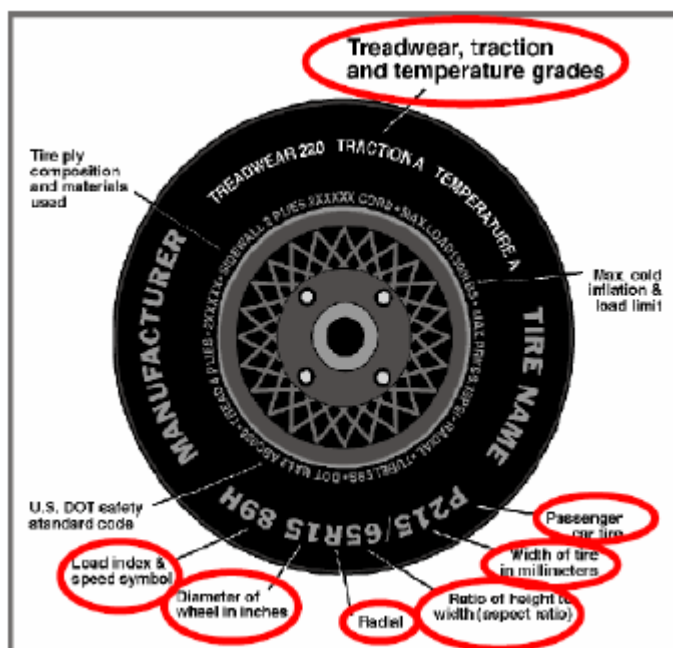

TIRE SIDEWALL INFORMATION

Measured Parameter	Front	Rear
Maximum Tire Pressure (kPa)	350	350
Cold Pressure (kPa)	220	220
Recommended Tire Size	P185/60R15	P185/60R15
Tire Size on Vehicle	P185/60R15	P185/60R15
Tire Manufacturer	Hankook	Hankook
Tire Model	Optimo H426	Optimo H426
Treadwear	380	380
Traction	A	A
Temperature Grade	A	A
Tire Plies Sidewall	1 Polyester	1 Polyester
Tire Plies Body	2 Steel, 1 Polyester, 1 Nylon	2 Steel, 1 Polyester, 1 Nylon
Load Index/Speed Symbol	84H	84H
Tire Material	Rubber	Rubber
DOT Safety Code Left	5MBTPDLH1515	5MBTPDLH1515
DOT Safety Code Right	5MBTPDLH1515	5MBTPDLH1515

DATA SHEET NO. 1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2016 Ford Fiesta four door sedan
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20160205
 Test Date: 10/26/2015

TIRE PRESSURES

	Units	LF	RF	LR	RR
As Delivered	kPa	224	220	222	222
Tire Placard	kPa	220	220	220	220
Owner's Manual	kPa	220	220	220	220
As Tested	kPa	220	220	220	220

MDB TIRE SPECIFICATIONS

	Units	Requirement	LF	RF	LR	RR
Tire Size		P205/75R15	P205/75R15	P205/75R15	P205/75R15	P205/75R15
Tire Pressure	kPa	200 ± 21	207	207	207	207

TEST VEHICLE WEIGHTS

	Units	As Delivered (UVW)			As Tested (ATW)			Fully Loaded		
		Front	Rear	Total	Front	Rear	Total	Front	Rear	Total
Left	kg	332	260		386	307		374	323	
Right	kg	344	226		341	284		344	279	
Ratio	%	58%	42%		55%	45%		55%	45%	
Totals	kg	676	486	1162	727	591	1318	723	602	1325

TARGET TEST WEIGHT CALCULATION

Measured Parameter	Units	Value	
Total Delivered Weight (UVW)	kg	1162	(A)
Sum of Actual Weight of 2 P572 ATDS Used	kg	127	(B)
Rated Cargo / Luggage Weight (RCLW)	kg	34.8	(C)
Calculated Target Vehicle Test Weight (TVT _W)	kg	1323.8	(A+B+C)

Does the measured As Test Vehicle Weight lie within the required weight range
 (i.e. Calculated Test Vehicle Target Weight – 4.5 kg to – 9 kg)? Yes No

TEST VEHICLE ATTITUDES AND CG

Measurement Description	Units	Fully Loaded	As Tested	Meets Requirement**
LF	mm	641	644	Yes
RF	mm	655	649	Yes
RR	mm	633	630	Yes
LR	mm	619	615	Yes
Vehicle CG (Aft of Front Axle)	mm	1133	1118	
Vehicle CG (Left+)/Right(-) from Longitudinal Centerline)	mm	43.5	38	

*** The "As Tested" vehicle attitude measurements must be equal to or within ± 10mm of the "Fully Loaded" vehicle attitude measurements at each wheel well. Indicate "Yes" or "No" for "Meets Requirements".

Test height adjustable suspension setting, if applicable: N/A

DATA SHEET NO. 1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2016 Ford Fiesta four door sedan
Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20160205
Test Date: 10/26/2015

WEIGHT OF BALLAST AND VEHICLE COMPONENTS REMOVED TO MEET TVTW

Component Description	Weight (kg)
Trunk Carpeting	7
Spare Tire & Jack	14
Tail Light	1
Rear Bumper Skin	5
Side View Mirrors	2
Passenger Side Windows	6
Ballast / Equipment Added	0

DATA SHEET NO. 2
SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA

Test Vehicle: 2016 Ford Fiesta four door sedan
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20160205
 Test Date: 10/26/2015

SEAT POSITIONING

The driver's seat, front center seat (if applicable), and right front passenger's seat should be set to the mid-track, lowest, mid-angle position. The struck-side rear passenger's seat, rear center seat, and non-struck side rear passengers' seats should be set to the rear-most, lowest, mid-angle position.

SCRL ANGLE RANGE

Seat	SCRL (°)		
	Max	Min	Mid
Driver Seat	13.6	8.3	11
Front Passenger Seat	-	Not Adjustable	-
Front Center Seat*			
Struck Side Rear Seat	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Fixed
Rear Center Seat*	Fixed	Fixed	Fixed

**if applicable*

SEAT HEIGHT AND ANGLE

Seat	As Tested SCRL Angle (Mid) (°)	As Tested SCRP Height (mm)	SCRP Height Position	SCRP Height (mm)		
				Rearmost	Mid-Fore/Aft	Forward-Most
Driver Seat	11	25	Max	40	50	60
			Mid	20	30	40
			Min	0	10	20
Front Passenger Seat	Not Adjustable		Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Front Center Seat*	N/A	N/A	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Struck Side Rear Seat	Fixed	Fixed	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Non-Struck Side Rear Seat	Fixed	Fixed	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-
Rear Center Seat*	Fixed	Fixed	Max	-	-	-
			Mid	-	-	-
			Min	-	-	-

**if applicable*

DATA SHEET NO. 2 ... (CONTINUED)
SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA

Test Vehicle: 2016 Ford Fiesta four door sedan
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20160205
 Test Date: 10/26/2015


SEAT FORE / AFT POSITION

Seat	Total Fore / Aft Travel		Test Position from Forwardmost Position	
	mm	Detents*	mm	Detent*
Driver Seat	240	(0-24) 25	120	12
Front Passenger Seat	240	(0-24) 25	120	12
Front Center Seat*	N/A	N/A	N/A	N/A
Struck Side Rear Seat	Fixed	Fixed	Fixed	Fixed
Non-Struck Side Rear Seat	Fixed	Fixed	Fixed	Fixed
Rear Center Seat*	Fixed	Fixed	Fixed	Fixed

**if applicable*

SEAT BACK ANGLE ADJUSTMENT

The driver's seat back is positioned to the manufacturer's designated design angle. The front center and front passenger's seat backs are positioned in a similar manner as the driver's seat back. The struck side rear seat back is positioned such that the dummy's head is level. The rear center and non-struck side rear outboard seat backs are positioned in a similar manner as the struck-side rear seat back.

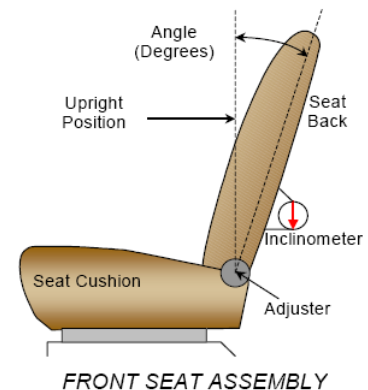

Seat	Total Seat Back Angle Range		Test Position from Most Upright	
	Degrees	Detents*	Degrees	Detents*
Driver Seat w/ Seated Dummy	-15.6 to 40	N/A	12.5	N/A
Front Passenger Seat	-16.1 to 39.4	N/A	13.0	N/A
Front Center Seat*	N/A	N/A	N/A	N/A
Struck Side Rear Seat w/ Seated Dummy	FIXED	FIXED	FIXED	FIXED
Non-Struck Side Rear Seat	FIXED	FIXED	FIXED	FIXED
Rear Center Seat*	FIXED	FIXED	FIXED	FIXED

**if applicable*

DATA SHEET NO. 2 ... (CONTINUED)
SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA

Test Vehicle: 2016 Ford Fiesta four door sedan
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20160205
 Test Date: 10/26/2015

SEAT BELT ANCHORAGE ADJUSTMENT

Seat belt anchorages are adjusted in accordance with the information provided by the manufacturer on Form No. 1. For this test zero is defined as the uppermost position.

	Total # of Positions	Placed in Position #
Driver Seat	4	0 – Uppermost
Rear Seat	FIXED	FIXED

HEAD RESTRAINT ADJUSTMENT


The driver's head restraint is adjusted to the highest and most full forward in-use position. The struck-side rear passenger's head restraint is adjusted to the lowest and most full forward in-use position.

	Total # of Positions	Placed in Position #
Driver Seat	3	0 - Uppermost
Rear Seat	2	1 – Lowest

STEERING COLUMN ADJUSTMENT

Steering wheel and column adjustments are made so that the steering wheel hub is at the center of its geometric locus it describes when it moves through its full range of motion.


	Degrees	Fore/Aft Position (mm)
Lowermost – Position 1	19.5	
Geometric Center – Position 2	21.3	
Uppermost – Position 3	23.1	
Telescoping Steering Wheel Travel		45
Test Position	21.3	23



FUEL PUMP

Describe the fuel pump type, details about how it operates, and the location of the fuel filler neck.

The vehicle is equipped with an electric fuel pump. The fuel filler neck is on the left side of the vehicle. The pump creates positive pressure in the fuel lines, pushing the gasoline to the engine. See form 1 for more information.

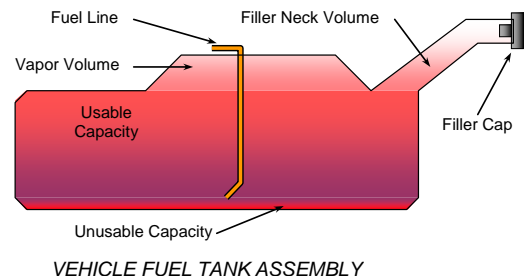

DATA SHEET NO. 2 ... (CONTINUED)
SEAT, SEAT BELT, STEERING WHEEL ADJUSTMENT AND FUEL SYSTEM DATA

Test Vehicle: 2016 Ford Fiesta four door sedan
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20160205
 Test Date: 10/26/2015

FUEL TANK CAPACITY


	Liters
Usable Capacity of "Standard Tank" (see Form No. 1)	46.9
Usable Capacity of "Optional Tank" (see Form No. 1)	N/A
Usable Capacity of Standard Tank (see Owner's Manual)	47.0
Usable Capacity of Optional Tank (see Owner's Manual)	N/A
93% of Usable Capacity	43.6
Actual Amount of Solvent Used in Test	43.6
1/3 of Usable Capacity	15.6

Is the Actual Amount of Solvent Used in the test equal to 93% ± 1% of the Usable Capacity stated in Form No. 1? **Yes** **No**

**DATA SHEET NO. 3
DUMMY LONGITUDINAL CLEARANCE DIMENSIONS**

Test Vehicle: 2016 Ford Fiesta four door sedan
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20160205
 Test Date: 10/26/2015

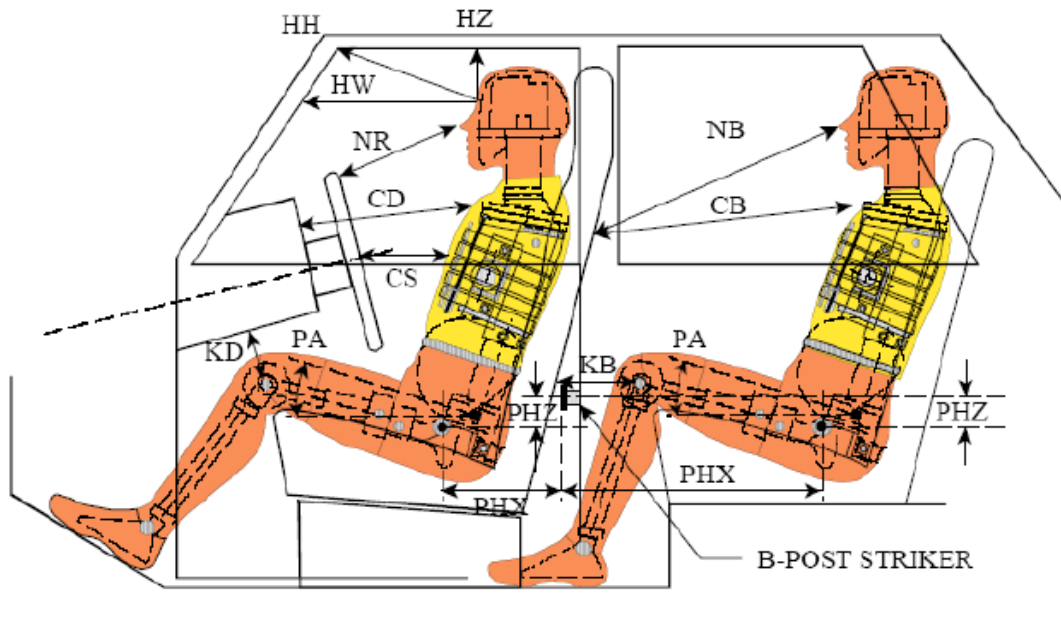

LEFT SIDE VIEW

NOTE: 2-DOOR VEHICLE SHOWN.
 REAR DUMMY PHX & PHZ
 MEASUREMENTS FOR A 4-DOOR
 VEHICLE WOULD USE THE C-POST
 STRIKER AS A REFERENCE POINT


DUMMY LONGITUDINAL CLEARANCE DIMENSION INFORMATION

Driver Code	Pass. Code	Description	Driver (Serial No. F034)		Passenger (Serial No. 303)	
			Length (mm)	Angle	Length (mm)	Angle
HH		Header to Header	368			
HW		Header to Windshield	646			
HZ	HZ	Head to Roof Liner	168		240	
NR	NB	Nose to Rim/Seat Back	409		473	
CD	CB	Chest to Dash/Seat Back	572		450	
CS		Chest to Steering Wheel	364			
KD(L)/KDA(L)°	KB(L)/KBA(L)°	Left Knee to Dash/Seat Back	186	40.1	204	15.8
KD(R)/KDA(R)°	KB(R)/KBA(R)°	Right Knee to Dash/Seat Back	150	46.1	210	14.9
PAX°	PAX°	Pelvic Tilt Angle X		21.5		0.4
	PAY°	Pelvic Tilt Angle Y				20.0
PHX	PHX	Hip Point to Striker (X-Axis)	193		270	
PHZ	PHZ	Hip Point to Striker (Z-Axis)	132		332	

**DATA SHEET NO. 4
DUMMY LATERAL CLEARANCE DIMENSIONS**

Test Vehicle: 2016 Ford Fiesta four door sedan
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20160205
 Test Date: 10/26/2015

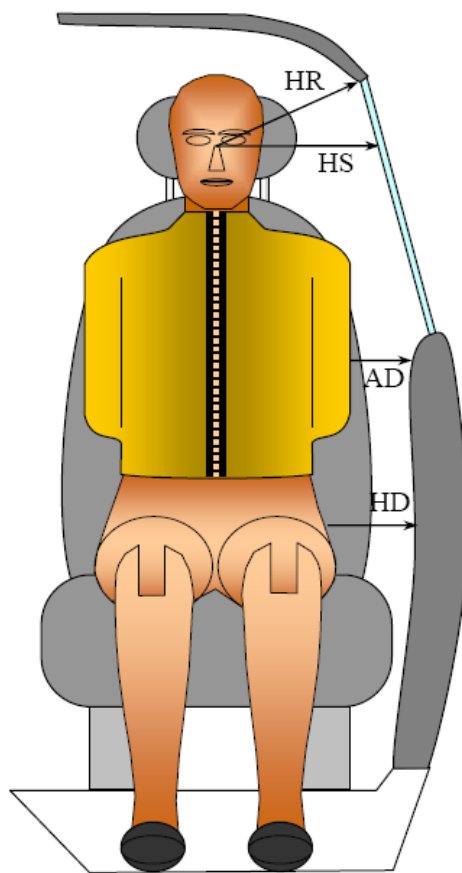

FRONT VIEW OF DUMMY


DUMMY LATERAL CLEARANCE DIMENSION INFORMATION

Code	Measurement Description	Units	Driver (Serial No. F034)	Passenger (Serial No. 303)
HR	Head to Side Header	mm	169	228
HS	Head to Side Window	mm	288	345
AD	Arm to Door	mm	85	112
HD	Hip Point to Door	mm	136	145

**DATA SHEET NO. 5
CAMERA AND INSTRUMENTATION DATA**

Test Vehicle: 2016 Ford Fiesta four door sedan
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20160205
 Test Date: 10/26/2015

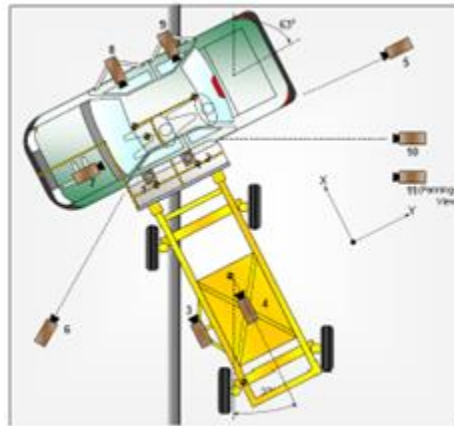

CAMERA LOCATIONS AND DATA

No.	Camera View	Coordinates (mm)			Lens Length (mm)	Operating Frame Rate (fps)
		X	Y	Z		
1	Overhead Overall	99	839	-5326	14	1000
2	Overhead Close-up	593	839	-5326	28	1000
3	Left Impact Point (MDB)	-1470	0	-847	25	1000
4	Side Overall (MDB)	-1140	838	-1587	12.5	1000
5	Rear	0	10011	-1140	28	1000
6	Left Front	-3241	-4826	-1236	24	1000
7	Driver Front (OB)				25	1000
8	Driver Side (OB)				12.5	1000
9	Passenger Side (OB)				12.5	1000
10	Real-time Left Rear				Zoom	60
11	Real-time In run				Zoom	60

Notes: Reference: Impact Point projected to Ground
 +X = To Front of MDB, +Y = To Right of MDB, +Z = Down
 *All measurements accurate to ± 6 mm.

If applicable, explain why camera(s) did not operate as intended: All cameras operated normally


INSTRUMENTATION

Driver Dummy Channels	16
Passenger Dummy Channels	16
Vehicle Structure Accelerometers	23
MDB Accelerometers	7
Total	62

**DATA SHEET NO. 6
TEST VEHICLE ACCELEROMETER LOCATIONS**

Test Vehicle: 2016 Ford Fiesta four door sedan
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20160205
 Test Date: 10/26/2015

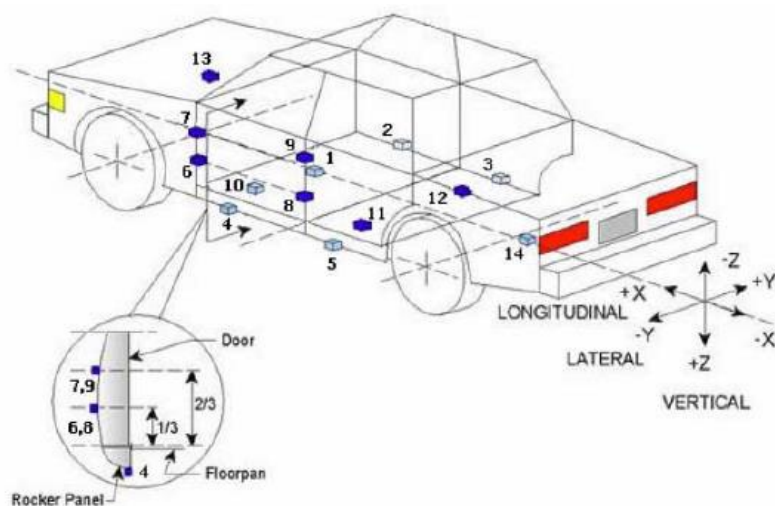

TEST VEHICLE ACCELEROMETER LOCATIONS


No.	Accelerometer Location	Coordinates (mm)		
		X	Y	Z
1	Vehicle CG	2459	1	-100
2	Right Sill at Front Seat	2704	609	-217
3	Right Sill at Rear Seat	1875	615	-211
4	Left Sill at Front Door	2705	-609	-223
5	Left Sill at Rear Door	1872	-611	-222
6	A-Post Lower	3137	-571	-13
7	A-Post Middle	2995	-664	404
8	B-Post Lower	2095	-647	81
9	B-Post Middle	2069	-649	339
10	Front Seat Track	2376	-517	-245
11	Rear Seat Structure	1246	-521	-69
12	Rt. Rear Occ. Compartment	2020	354	-332
13	Engine Block	3694	-3	201
14	Rear Above Axle	1228	6	-111

Reference: X – Rear surface of vehicle (+ forward)
 Y – Vehicle centerline (+ to right)
 Z – Ground plane (+ down)

DATA SHEET NO. 7
MDB ACCELEROMETER LOCATIONS

Test Vehicle: 2016 Ford Fiesta four door sedan
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20160205
 Test Date: 10/26/2015

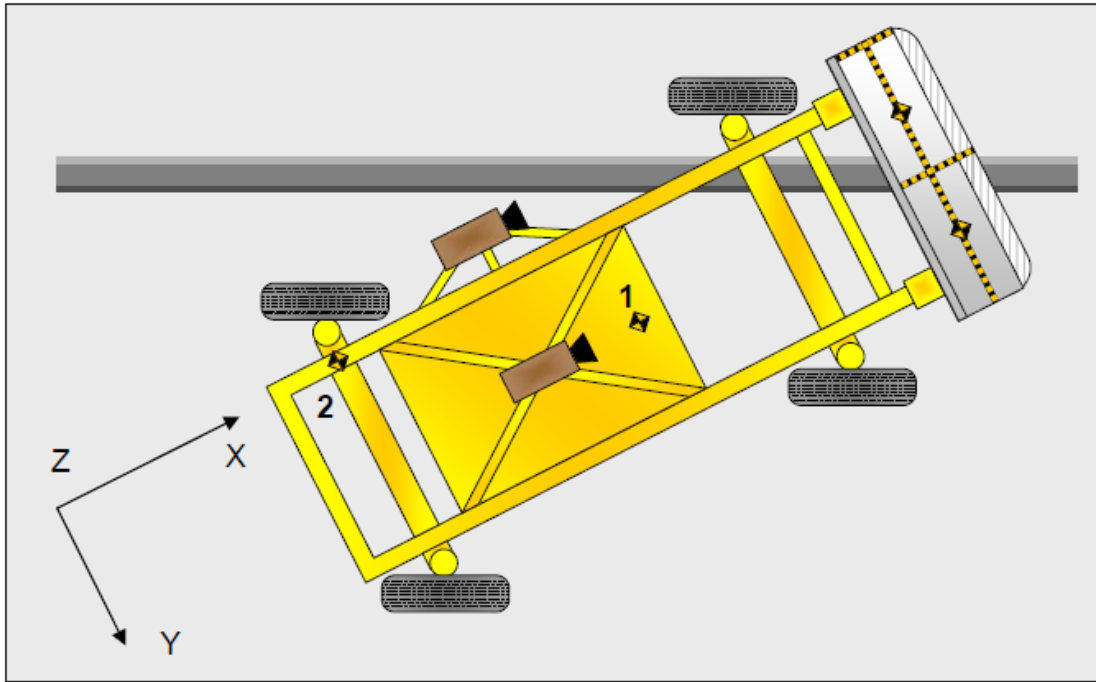

MDB ACCELEROMETER LOCATIONS

No.	Accelerometer Location	Coordinates (mm)		
		X	Y	Z
1	MDB CG	1859	0	-330
2	MDB Rear	386	-660	-660

*Reference: X – Face of MDB (+ forward)
 Y – MDB centerline (+ to right)
 Z – Ground plane (+ down)*

**DATA SHEET NO. 8
POST-TEST OBSERVATIONS**

Test Vehicle: 2016 Ford Fiesta four door sedan
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20160205
 Test Date: 10/26/2015

TEST DUMMY INFORMATION AND CONTACT POINTS

Dummy Body Part	Front Seat Dummy (ES-2re)	Rear Seat Dummy (SID-IIs)
Face	Curtain Airbag	Curtain Airbag
Top of Head	Side Headliner	Curtain Airbag & Side Headliner
Left Side of Head	Curtain Airbag	Curtain Airbag
Back of Head	Headrest & Curtain Airbag	Headrest, Curtain Airbag & Side Headliner
Left Shoulder	Torso/Pelvis Airbag	Passenger Door & Seatback
Upper Torso	Torso/Pelvis Airbag & Seatback	Passenger Door
Lower Torso	Torso/Pelvis Airbag & Seatback	Passenger Door
Left Hip	Seatback & Driver Door	Passenger Door & Seat pan
Left Knee	Window Lever on Driver Door	Passenger Door

POST-TEST DOOR PERFORMANCE

Description	Struck Side		Non-Struck Side		Rear Hatch/Other
	Front	Rear	Front	Rear	
Remained Closed and Operational	No	No	Yes	Yes	Yes
Total Separation from Vehicle at Hinges or Latches	No	No	No	No	No
Latch or Hinge Systems Pulled Out of Their Anchorages	No	No	No	No	No
Disengaged from Latched Position	No	No	No	No	No
Latch Separated from Striker	No	No	No	No	No
Jammed Shut	Yes	Yes	No	No	No
If Door Opened at Striker, Width of Opening at Striker (mm)	0	0	0	0	0

POST-TEST SEAT PERFORMANCE

Description	Struck Side		Non-Struck Side	
	Front	Rear	Front	Rear
Seat Movement Along Seat Track	No	No	No	No
Seat Disengagement from Floor Pan	No	No	No	No
Seat Back Movement from Initial Position	No	No	No	No
Seat Back Collapse	No	No	No	No

POST-TEST STRUCTURAL OBSERVATIONS

Critical Areas of Performance	Observations and Conclusions
Pillar Performance	Remained in good condition
Sill Separation	None
Windshield Damage	None
Side Window Damage	Driver and Rear Passenger Windows Shattered on Impact
Other Notable Effects	None

**DATA SHEET NO. 8 ... (CONTINUED)
POST-TEST OBSERVATIONS**

Test Vehicle: 2016 Ford Fiesta four door sedan
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20160205
 Test Date: 10/26/2015

SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION

Restraint Type	Struck Side Driver		Struck Side Rear Passenger	
	Mounted	Deployed	Mounted	Deployed
Frontal Airbag	Yes	No		
Knee Airbag	Yes	No		
Side Airbag 1 - Curtain	Yes	Yes	Yes	Yes
Side Airbag 2 – Torso/Pelvis Airbag	Yes	Yes	No	N/A
Seat Belt Pretensioner	Yes	Yes	No	N/A
Seat Belt Load Limiter	Yes	Yes	No	N/A
Other				

IMPACT POINT LOCATION DATA

Measured Parameter	Units	Tolerance	Value
Vehicle Wheel Base	mm		2493
Vertical Impact Reference Line (Aft of Front Axle - Intended Impact Point)	mm		308
Actual Impact Point (Aft of Frontal Axle)	mm		308
Horizontal Offset (+ forward / - rearward)	mm	+/- 50 of Intended Impact Point	0
Vertical Offset (+ down / - up)	mm	+/- 20 of Intended Impact Point	-6

**DATA SHEET NO. 9
MDB SUMMARY OF RESULTS**

Test Vehicle: 2016 Ford Fiesta four door sedan
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20160205
 Test Date: 10/26/2015

MDB SPECIFICATIONS

Measurement Description	Length (mm)
Overall Width of Framework Carriage	1,250
Overall Length Including Honeycomb Frame	4,120
Wheelbase of Framework Carriage	2,600
CG Location of Front Axle	1,120

MDB WEIGHTS

	Units	Front Axle	Rear Axle	Total
Left	kg	392.5	297.5	690.0
Right	kg	386.0	291.5	677.5
Ratio	%	57.4%	42.6%	100.0%
Totals	kg	778.5	589.0	1367.5

SPEED AND ANGLE AT IMPACT DATA

Measured Parameter	Units	Requirement	Value
Trap No. 1 Velocity (Primary)	km/h	61.10 to 62.70	61.40
Trap No. 2 Velocity (Redundant)	km/h	61.10 to 62.70	61.55
MDB CL to Target Vehicle CL	degrees	88.5 to 91.5	90.0
MDB Forward Line of Motion to Target Vehicle CL	degrees	62.5 to 63.5	63.0
MDB Crabbed angle to MDB Forward Line of Motion	degrees	26.0 to 28.0	27.0


MAXIMUM STATIC CRUSH OF HONEYCOMB IMPACT FACE

Vertical Location			From Centerline		Maximum Crush (mm)
Row	Description	Height (mm)	Distance (mm)	Direction	
A	Center of Bumper	432	800	Left	192
B	Top of Bumper	533	800	Left	132
C	Mid-Level	686	800	Left	159
D	Top of Stack	813	800	Left	180

DATA SHEET NO. 10
TEST VEHICLE PROFILE MEASUREMENTS

Test Vehicle: 2016 Ford Fiesta four door sedan
Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20160205
Test Date: 10/26/2015

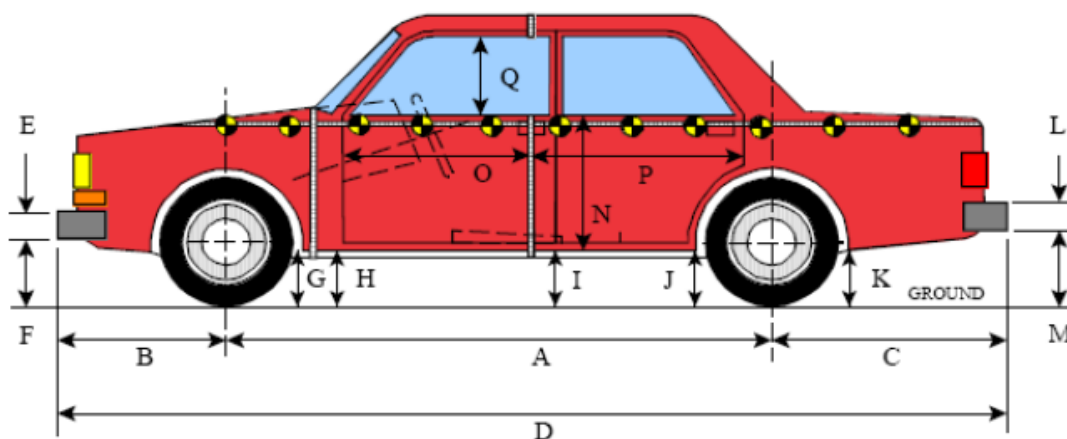

LEFT SIDE VIEW

All MEASUREMENTS IN (mm) WITH TOLERANCE OF ± 3 mm


VEHICLE PRE- AND POST-TEST MEASUREMENT INFORMATION

Code	Description	Pre-Test	Post-Test	Difference
A	Wheelbase	2493	2493	0
B	Front Axle to FSOV	841	852	10
C	Rear Axle to RSOV	1066	1052	-15
D	Total Length at Centerline	4400	4396	-5
E	Front Bumper Thickness	120	120	0
F	Front Bumper Bottom to Ground	414	412	-2
G	Sill Height at Front Wheel Well	213	217	4
H	Sill Height at Front Door Leading Edge	210	222	12
I	Sill Height at B Pillar	214	224	10
J1	Sill Height at Rear Wheel Well	200	212	12
J2	Pinch Weld Height at Rear Wheel Well	185	186	1
K	Sill Height Aft of Rear Wheel Well	222	235	13
L	Rear Bumper Thickness	170	170	0
M	Rear Bumper Bottom to Ground	348	344	-4
N	Sill Height to Window Bottom of Front Window Sill	770	780	10
O	Front Door Leading Edge to Impact CL	717	708	-9
P	Rear Door Trailing Edge to Impact CL	1256	1201	-54
Q	Front Window Opening	373	350	-23
R	Right Side Length	4257	4259	2
S	Left Side Length	4258	4247	-11
T	Maximum Vehicle Width	1684	1526	-157

DATA SHEET NO. 11
TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS

Test Vehicle: 2016 Ford Fiesta four door sedan
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20160205
 Test Date: 10/26/2015

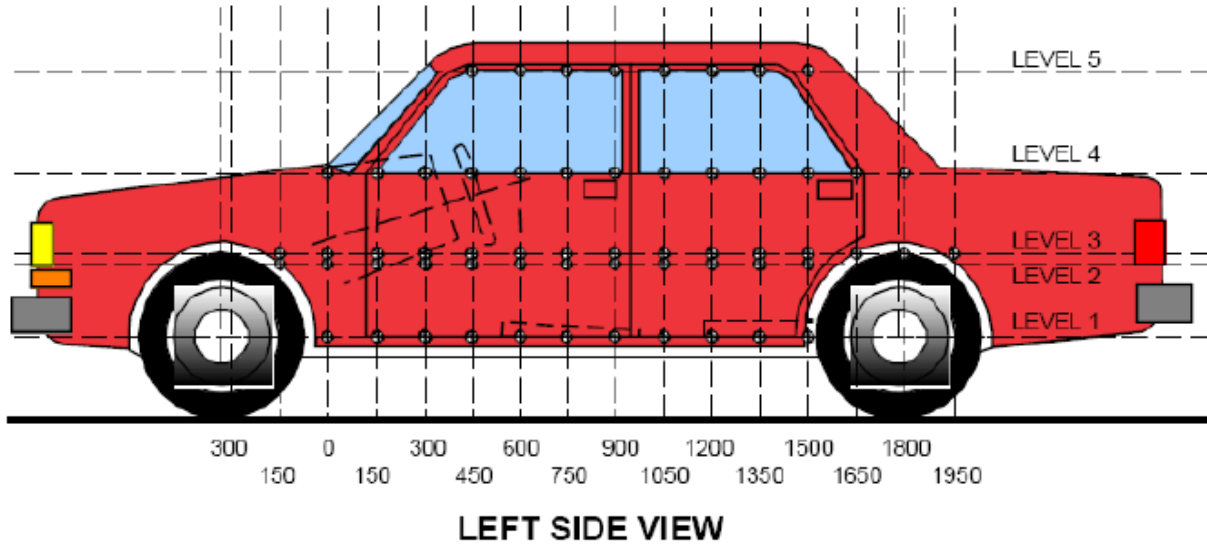

MAXIMUM EXTERIOR CRUSH MEASUREMENTS

Level	Measurement Description	Units	Height Above Ground	Maximum Exterior Static Crush	Distance from Impact
1	Sill Top	mm	302	57	1200
2	Driver Hip Point	mm	547	205	1200
3	Mid-Door	mm	640	201	1650
4	Window Sill	mm	875	173	1650
5	Window Top	mm	1392	13	1350

*window top level bent outward from original position

NOTE: The above measurements should be taken along the vertical impact reference line. Vehicle measurements forward of the vertical impact reference line are negative.

DATA SHEET NO. 11 ... (CONTINUED)
TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS

Test Vehicle: 2016 Ford Fiesta four door sedan
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20160205
 Test Date: 10/26/2015

EXTERIOR CRUSH MEASUREMENTS AT EACH LEVEL


	Pre-Test					Post-Test					Difference				
	1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
-900															
-750															
-600															
-450															
-300															
-150			850	756				867	770				-17	-14	
0		846	846	764			825	829	770			21	17	-6	
150	816	834	829	778		770	687	711	752		46	147	118	26	
300	817	836	835	794		776	675	681	748		41	161	154	46	
450	817	839	839	806		783	678	674	723		34	161	165	83	
600	816	840	842	816		780	665	683	705		36	175	159	111	
750	813	841	843	823		778	665	688	692		35	176	155	131	
900	812	841	844	823	572	772	668	689	681	575	40	173	155	142	-3
1050	807	840	844	832	581	769	668	683	709	580	38	172	161	123	1
1200	799	837	842	830	581	742	632	676	725	575	57	205	166	105	6
1350	793	832	838	824	577	752	631	660	676	564	41	201	178	148	13
1500	787	827	833	815	572	762	626	648	645	563	25	201	185	170	9
1650	793	824	827	810	565	745	624	626	637	559	48	200	201	173	6
1800	804	838	824	805	553	771	673	644	648	551	33	165	180	157	2
1950			838	798	526			775	724	525			63	74	1
2100			843	789				812	780				31	9	
2250				779					757					22	
2400				766					760					6	
2550				751					752					-1	
2700															
2850															
3000															

NOTE: Pre-test measurements are taken when the vehicle is in the "As Tested" weight condition.
 Vehicle measurements forward of the vertical impact reference line are negative.
 The crush profile grid is established prior to test based on an estimated impact point.

DATA SHEET NO. 11 (CONTINUED)
TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS

Test Vehicle: 2016 Ford Fiesta four door sedan
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20160205
 Test Date: 10/26/2015

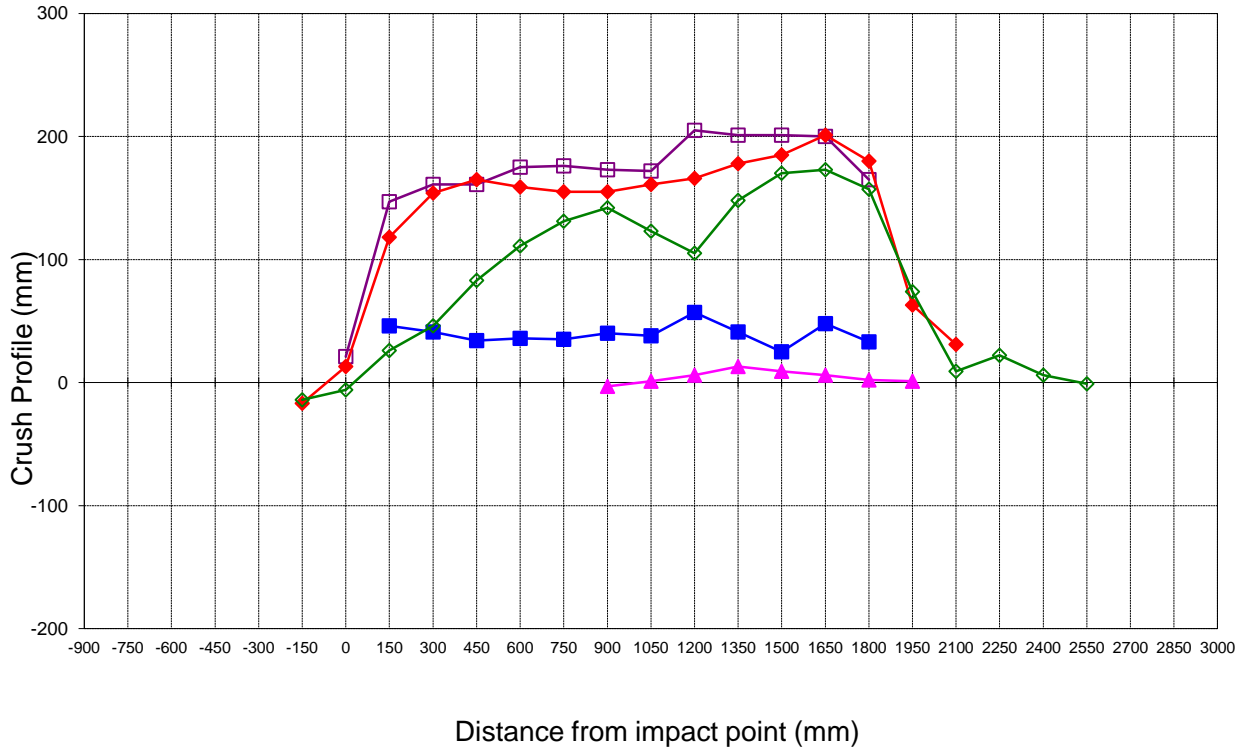


—■— LEVEL 1 Side Sill: -268 mm above ground	—□— LEVEL 2 H-Point: -23 mm above ground
—◆— LEVEL 3 Mid Door: 69 mm above ground	—◇— LEVEL 4 Window Sill: 305 mm above ground
—▲— LEVEL 5 Window Top: 821 mm above ground	

Vehicle Exterior Crush Measurements - Visual Representation

**DATA SHEET NO. 12
MDB EXTERIOR STATIC CRUSH MEASUREMENTS**

Test Vehicle: 2016 Ford Fiesta four door sedan
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20160205
 Test Date: 10/26/2015

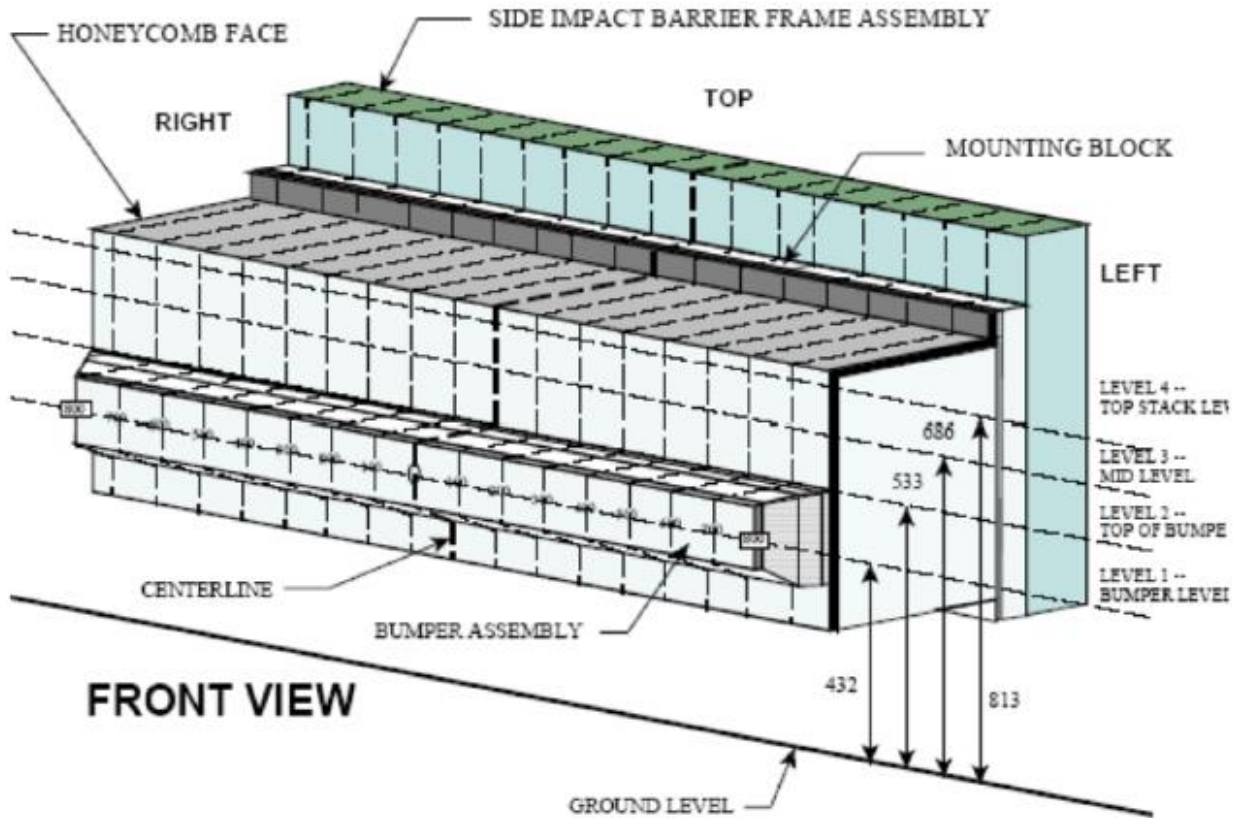

NOTE: Dimensions are shown in millimeters, mm

DEFORMABLE BARRIER STATIC CRUSH


Stack Level	Distance Right of Center								C/L	Distance Left of Center							
	800	700	600	500	400	300	200	100		0	100	200	300	400	500	600	700
1	173	160	160	162	164	173	164	166	166	164	162	160	162	164	170	192	191
2	80	83	82	80	62	79	84	79	79	83	87	93	102	110	114	123	132
3	11	10	19	27	36	69	71	52	36	32	32	33	40	48	66	111	159
4	14	17	22	33	57	99	85	77	74	50	50	53	56	79	111	153	180

DATA SHEET NO. 13
MDB EXTERIOR STATIC CRUSH MEASUREMENTS

Test Vehicle: 2016 Ford Fiesta four door sedan
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20160205
 Test Date: 10/26/2015

For guidance regarding damage profile distance measurements, please refer to the latest version of the *NHTSA Test Reference Guide, Volume 1: Vehicle Tests*.

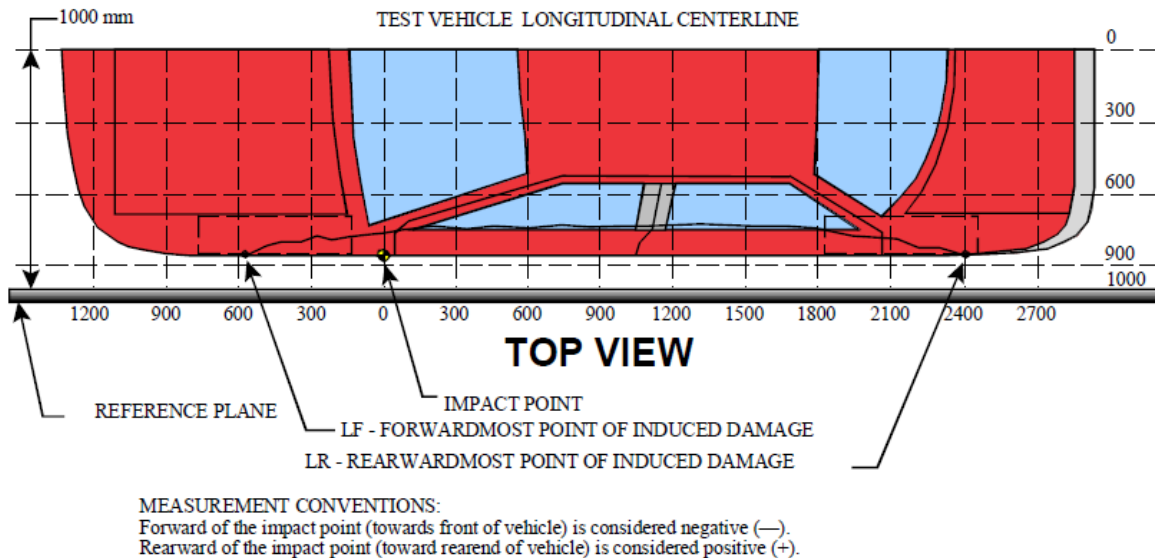

VEHICLE DAMAGE PROFILE DISTANCES

DPD	Distance From Impact Point (mm)	Level	Post-Test (mm)	Pre-Test (mm)	Crush (mm)
1	-150	3	133	150	-17
2	300	3	319	165	154
3	750	3	312	157	155
4	1200	3	324	158	166
5	1650	3	374	173	201
6	2100	3	188	157	31

MDB DAMAGE PROFILE DISTANCES

DPD	Distance From Center of MDB	Level	Post-Test (mm)*
1	800 mm left of center	1	191
2	480 mm left of center	1	163
3	160 mm left of center	1	163
4	160 mm right of center	1	165
5	480 mm right of center	1	163
6	800 mm right of center	1	173

**DATA SHEET NO. 14
FMVSS NO. 301 STATIC ROLLOVER RESULTS**

Test Vehicle: <u>2016 Ford Fiesta four door sedan</u>	NHTSA No.: <u>M20160205</u>
Test Program: <u>NCAP Side MDB Impact Test</u>	Test Date: <u>10/26/2015</u>
Test Time: <u>2:40 PM</u>	Temperature: <u>21°C</u>

- | | |
|---|-----------------------------|
| A. From impact until vehicle motion ceases:
(Maximum allowable is 1 oz.) | <u>0</u> oz. |
| B. For the 5-minute period after motion ceases:
(Maximum allowable is 5 oz.) | <u>0</u> oz. |
| C. For the following 25 minutes:
(Maximum allowable is 1 oz./minute) | <u>0</u> oz. |
| D. Spillage Details: | <u>No Spillage Occurred</u> |

FMVSS NO. 301 STATIC ROLLOVER DATA



ROLLOVER SOLVENT COLLECTION TIME TABLE IN SECONDS

Test Phase	Rotation Time	Hold Time	Total Time
0° to 90°	71	300	371
90° to 180°	67	300	367
180° to 270°	61	300	361
270° to 360°	66	300	366

FMVSS NO. 301 ROLLOVER SPILLAGE TABLE

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° to 90°	0	0	0	
90° to 180°	0	0	0	
180° to 270°	0	0	0	
270° to 360°	0	0	0	


ROLLOVER SOLVENT SPILLAGE LOCATION TABLE

Test Phase	Spillage Location
0° to 90°	None
90° to 180°	None
180° to 270°	None
270° to 360°	None

**DATA SHEET NO. 15
DUMMY/VEHICLE TEMPERATURE AND HUMIDITY STABILIZATION DATA**

Test Vehicle: 2016 Ford Fiesta four door sedan
 Test Program: NCAP Side MDB Impact Test

NHTSA No.: M20160205
 Test Date: 10/26/2015

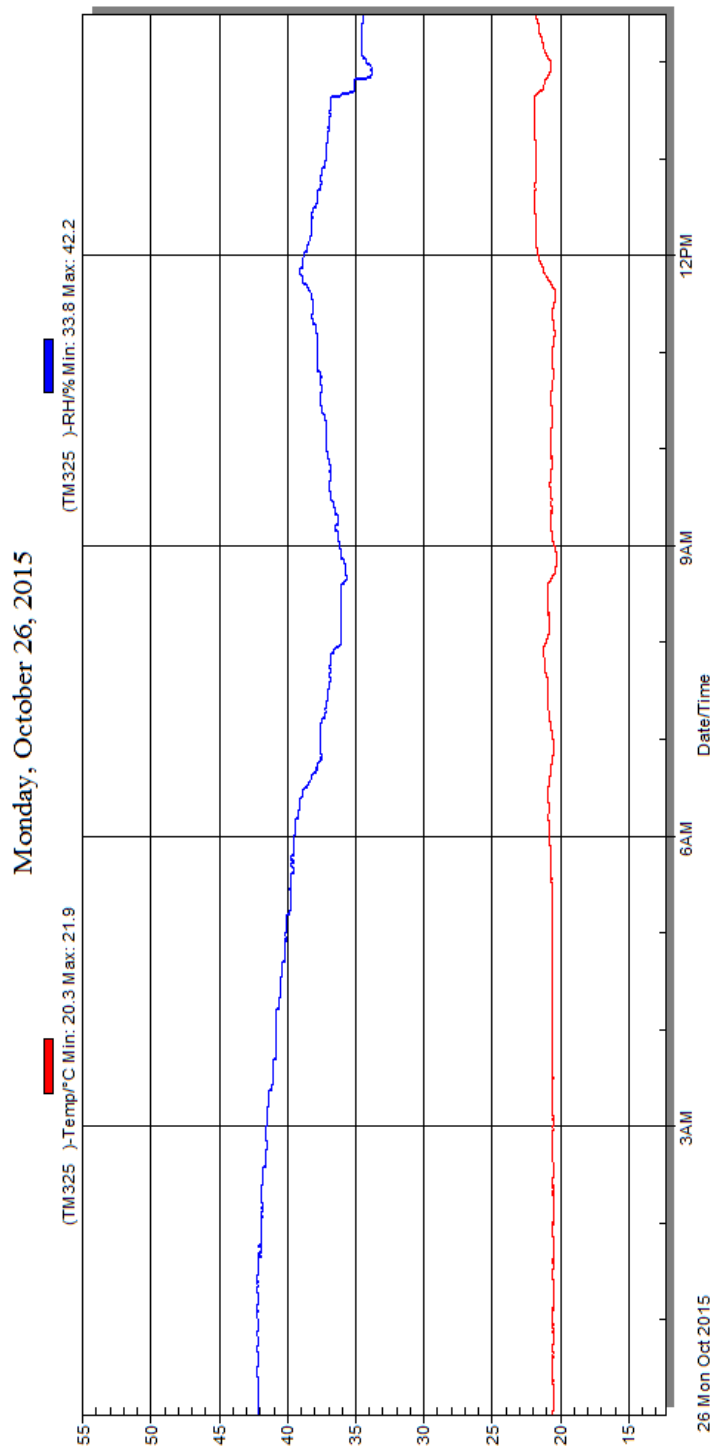

Temperature and Humidity Stabilization Chart/Data for Dummies and Test Vehicle

APPENDIX A
PHOTOGRAPHS

TABLE OF PHOTOGRAPHS

Fig.	Description	Page
1	As-Delivered Right Front 3/4 View of Test Vehicle	A-5
2	As-Delivered Left Rear 3/4 View of Test Vehicle	A-5
3	Pre-Test Frontal View of Test Vehicle	A-6
4	Post-Test Frontal View of Test Vehicle	A-6
5	Pre-Test Left Front 3/4 View of Test Vehicle	A-7
6	Post-Test Left Front 3/4 View of Test Vehicle	A-7
7	Pre-Test Left Side View of Test Vehicle	A-8
8	Post-Test Left Side View of Test Vehicle	A-8
9	Pre-Test Left Rear 3/4 View of Test Vehicle	A-9
10	Post-Test Left Rear 3/4 View of Test Vehicle	A-9
11	Pre-Test Rear View of Test Vehicle	A-10
12	Post-Test Rear Side View of Test Vehicle	A-10
13	Pre-Test Right Side View of Test Vehicle	A-11
14	Post-Test Right Side View of Test Vehicle	A-11
15	Pre-Test Overhead View of Test Area	A-12
16	Post-Test Overhead View of Test Area	A-12
17	Pre-Test Left Side View of MDB Positioned Against Side of Test Vehicle	A-13
18	Pre-Test Right Side View of MDB Positioned Against Side of Test Vehicle	A-13
19	Pre-Test Close-Up View of Impact Point Target	A-14
20	Post-Test Close-up View of Impact Point Target	A-14
21	Pre-Test Left Front Door Latch Close-Up	A-15
22	Post-Test Left Front Door Latch Close-Up	A-15
23	Pre-Test Left Rear Door Latch Close-Up	A-16
24	Post-Test Left Rear Door Latch Close-Up	A-16
25	Pre-Test Front Close-up View of Driver Dummy	A-17
26	Post-Test Front Close-up View of Driver Dummy	A-17
27	Pre-Test Left Side View of Driver Dummy Showing Belt and Chalking	A-18
28	Pre-Test Left Side View of Driver Dummy Shoulder and Door Top View	A-18
29	Post-Test Left Side View of Driver Dummy Shoulder and Door Top View	A-19
30	Pre-Test Frontal View of Driver Seat Back Prior to Dummy Positioning	A-19
31	Pre-Test Frontal View of Driver Dummy Head and Shoulders in Relation to Head Restraint	A-20
32	Pre-Test Frontal View of Driver Seat Pan Prior to Dummy Positioning	A-20
33	Pre-Test Overhead View of Driver Dummy Thighs on Seat Pan	A-21
34	Pre-Test Placement of Driver Dummy's Feet	A-21

Fig.	Description	Page
35	Pre-Test View of Belt Anchorage for Driver Dummy	A-22
36	Pre-Test Left Side View of Steering Wheel	A-22
37	View of Disengaged Parking Brake	A-23
38	Pre-Test View of Parking Brake	A-23
39	Pre-Test Close-Up Left Side View of Driver Seat Track	A-24
40	Pre-Test Close-Up Left Side View of Driver Seat Back	A-24
41	Pre-Test Close-Up View of Driver Seat Back or Head Restraint	A-25
42	Pre-Test Driver Dummy and Door Clearance View	A-25
43	Post-Test Driver Dummy and Door Clearance View	A-26
44	Pre-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment	A-26
45	Post-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment	A-27
46	Pre-Test Driver Inner Door Panel View	A-27
47	Post-Test Driver Inner Door Panel View	A-28
48	Post-Test Driver Dummy Close-Up Head Contact with Vehicle View	A-28
49	Post-Test Driver Dummy Close-Up Head Contact with Side Airbag View	A-29
50	Post-Test Driver Dummy Close-Up Torso Contact with Vehicle Interior View	A-29
51	Post-Test Driver Dummy Close-Up Torso Contact with Side Airbag View	A-30
52	Post-Test Driver Dummy Close-Up Pelvis Contact View	A-30
53	Post-Test Driver Dummy Close-Up Pelvis Contact with Side Airbag View	A-31
54	Post-Test Driver Dummy Close-Up Knee Contact View	A-31
55	Pre-Test Left Side View of Passenger Dummy Showing Belt and Chalking	A-32
56	Pre-Test Left Side View of Passenger Dummy Shoulder and Door Top View	A-32
57	Post-Test Left Side View of Passenger Dummy Shoulder and Door Top View	A-33
58	Pre-Test Frontal View of Rear Passenger Seat Back Prior to Dummy Positioning	A-33
59	Pre-Test Frontal View of Rear Passenger Dummy Head and Shoulders in Relation to Head Restraint	A-34
60	Pre-Test Overhead View of Rear Passenger Seat Pan Prior to Dummy Positioning	A-34
61	Pre-Test Overhead View of Rear Passenger Dummy Thighs on Seat Pan	A-35
62	Pre-Test View of Rear Passenger Dummy's Neck Showing Position of Adjustable Neck Bracket	A-35
63	Pre-Test View of Rear Passenger Dummy's Head Showing Dummy's Head is Level	A-36
64	Pre-Test Placement of Rear Passenger Dummy's Feet	A-36
65	Pre-Test View of Belt Anchorage for Rear Passenger Dummy	A-37
66	Pre-Test Close-Up Left Side View of Rear Passenger Seat Track	A-37
67	Pre-test Close-Up Left Side View of Rear Passenger Seat Back	A-38
68	Pre-Test Close-Up View of Rear Passenger Seat Back or Head Restraint	A-38

Fig.	Description	Page
69	Pre-Test Passenger Dummy and Door Clearance View	A-39
70	Post-Test Passenger Dummy and Door Clearance View	A-39
71	Pre-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment	A-40
72	Post-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment	A-40
73	Pre-Test Passenger Inner Door Panel View	A-41
74	Post-Test Passenger Inner Door Panel View	A-41
75	Post-Test Rear Passenger Dummy Close-Up Head Contact with Vehicle View	A-42
76	Post-Test Rear Passenger Dummy Close-Up Head Contact with Side Airbag View	A-42
77	Post-Test Rear Passenger Dummy Close-Up Torso Contact with Vehicle Interior View	A-43
78	Post-Test Rear Passenger Dummy Close-Up Torso Contact with Side Airbag View	A-43
79	Post-Test Rear Passenger Dummy Close-Up Pelvis Contact View	A-44
80	Post-Test Rear Passenger Dummy Close-Up Pelvis Contact with Side Airbag View	A-44
81	Post-Test Rear Passenger Dummy Close-Up Knee Contact View	A-45
82	Pre-Test View of Fuel Filler Cap or Fuel Filler Neck	A-45
83	Post-Test View of Fuel Filler Cap or Fuel Filler Neck	A-46
84	Pre-Test Front View of MDB Impactor Face	A-46
85	Post-Test Front View of MDB Impactor Face	A-47
86	Pre-Test Top View of MDB Impactor Face	A-47
87	Post-Test Top View of MDB Impactor Face	A-48
88	Pre-Test Left Side View of MDB Impactor Face	A-48
89	Post-Test Left Side View of MDB Impactor Face	A-49
90	Pre-Test Right Side View of MDB Impactor Face	A-49
91	Post-Test Right Side View of MDB Impactor Face	A-50
92	Close-Up View of Vehicle's Certification Label	A-50
93	Close-Up View of Vehicle's Tire Information Placard or Label	A-51
94	Pre-Test Ballast View	A-51
95	Post-Test Primary and Redundant Speed Trap Read-Out	A-52
96	FMVSS No. 301 Static Rollover 0 Degrees	A-52
97	FMVSS No. 301 Static Rollover 90 Degrees	A-53
98	FMVSS No. 301 Static Rollover 180 Degrees	A-53
99	FMVSS No. 301 Static Rollover 270 Degrees	A-54
100	FMVSS No. 301 Static Rollover 360 Degrees	A-54
101	Impact Event	A-55
102	Monroney Label	A-55
103	Driver Head Restraint Use and Adjustment Information from Vehicle Owner's Manual	A-56
104	Left Rear Passenger Head Restraint Use and Adjustment Information from Vehicle Owner's Manual	A-56



Figure A-1: As-Delivered Right Front 3/4 View of Test Vehicle



Figure A-2: As-Delivered Left Rear 3/4 View of Test Vehicle



Figure A-3: Pre-Test Frontal View of Test Vehicle



Figure A-4: Post-Test Frontal View of Test Vehicle



Figure A-5: Pre-Test Left Front 3/4 View of Test Vehicle



Figure A-6: Post-Test Left Front 3/4 View of Test Vehicle



Figure A-7: Pre-Test Left Side View of Test Vehicle



Figure A-8: Post-Test Left Side View of Test Vehicle



Figure A-9: Pre-Test Left Rear $\frac{3}{4}$ View of Test Vehicle



Figure A-10: Post-Test Left Rear $\frac{3}{4}$ View of Test Vehicle



Figure A-11: Pre-Test Rear View of Test Vehicle



Figure A-12: Post-Test Rear Side View of Test Vehicle



Figure A-13: Pre-Test Right Side View of Test Vehicle

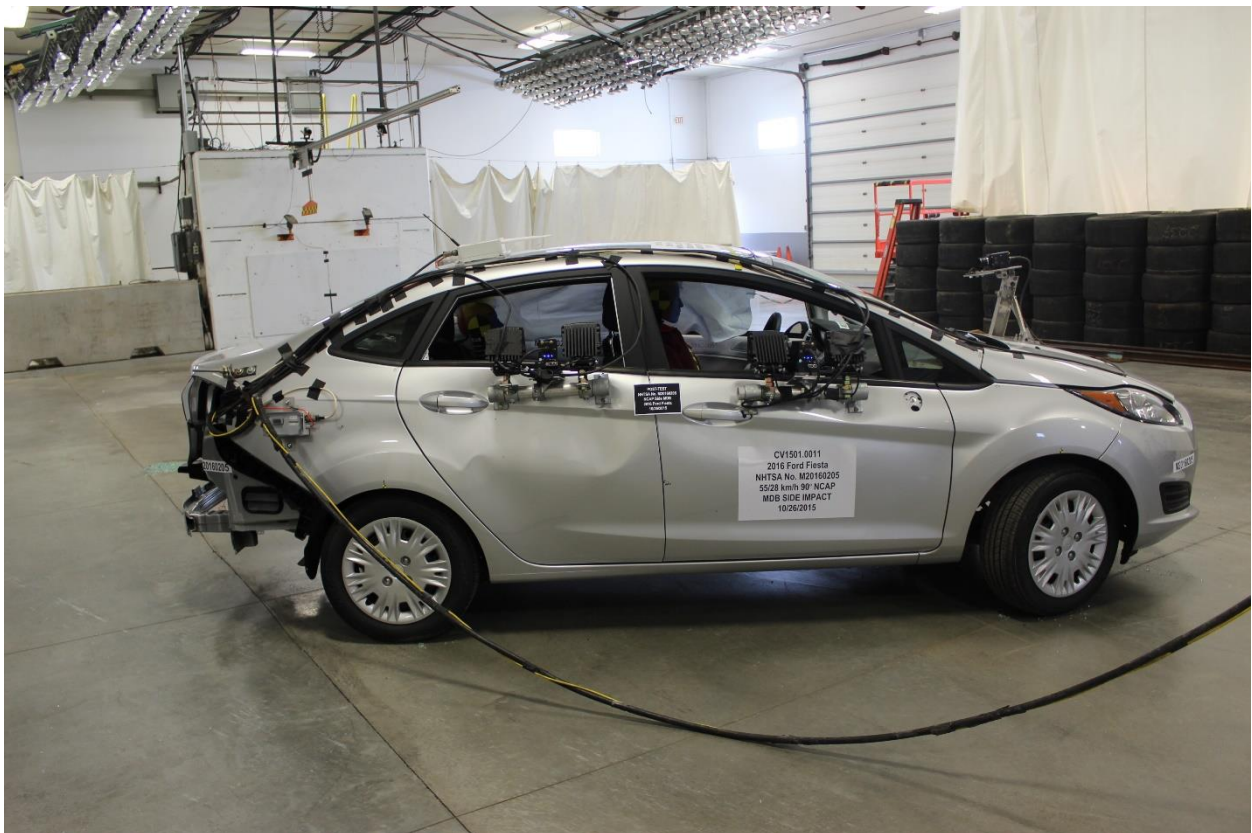


Figure A-14: Post-Test Right Side View of Test Vehicle



Figure A-15: Pre-Test Overhead View of the Test Area

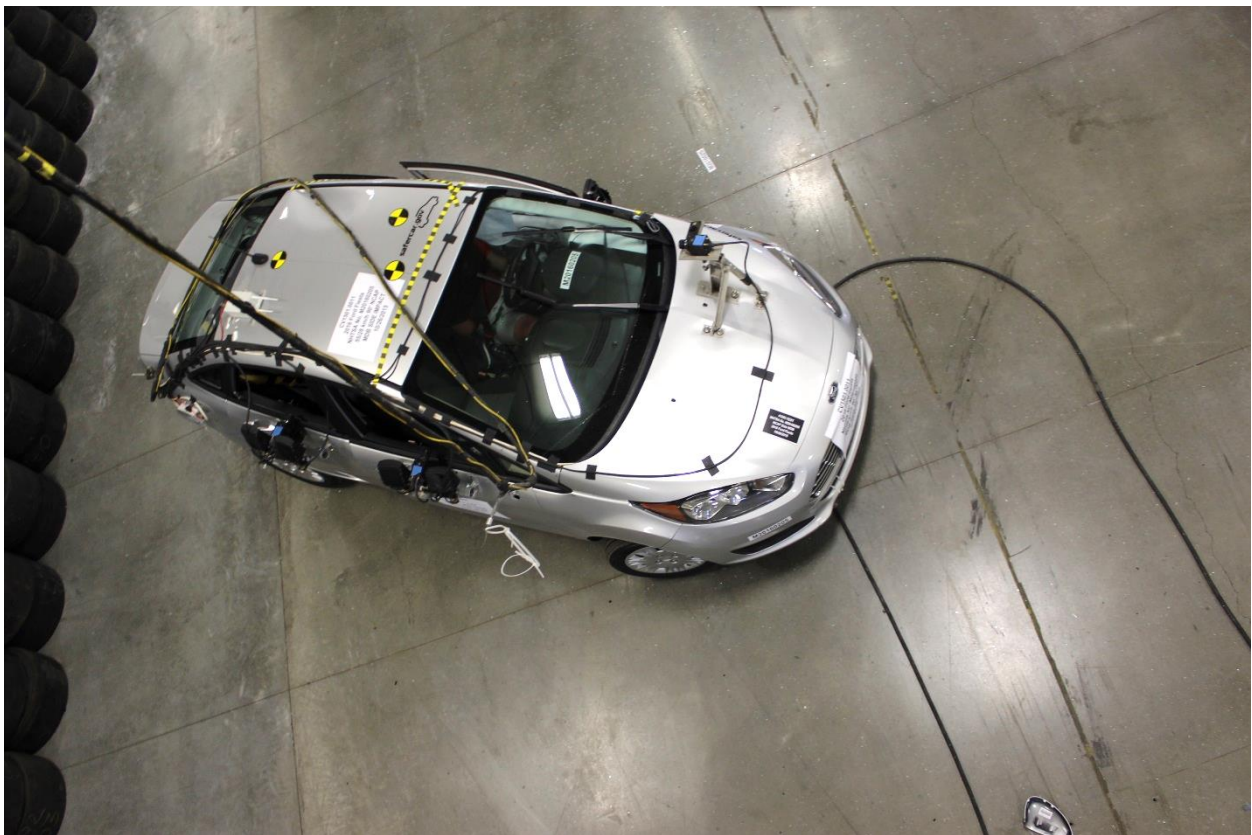


Figure A-16: Post-Test Overhead View of Test Area



Figure A-17: Pre-Test Left Side View of MDB Positioned Against Side of Test Vehicle



Figure A-18: Pre-Test Right Side View of MDB Positioned Against Side of Test Vehicle



Figure A-19: Pre-Test Close-up View of Impact Point Target



Figure A-20: Post-Test Close-up View of Impact Point Target



Figure A-21: Pre-Test Left Front Door Latch Close-Up



Figure A-22: Post-Test Left Front Door Latch Close-Up



Figure A-23: Pre-Test Left Rear Door Latch Close-Up



Figure A-24: Post-Test Left Rear Door Latch Close-Up



Figure A-25: Pre-Test Front Close-up View of Driver Dummy



Figure A-26: Post-Test Front Close-up View of Driver Dummy



Figure A-27: Pre-Test Left Side View of Driver Dummy Showing Belt and Chalking



Figure A-28: Pre-Test Left Side View of Driver Dummy Shoulder and Door Top View



Figure A-29: Post-Test Left Side View of Driver Dummy Shoulder and Door Top View



Figure A-30: Pre-Test Frontal View of Driver Seat Back Prior to Dummy Positioning



Figure A-31: Pre-Test Frontal View of Driver Dummy Head and Shoulders in Relation to Head Restraint



Figure A-32: Pre-Test Frontal View of Driver Seat Pan Prior to Dummy Positioning

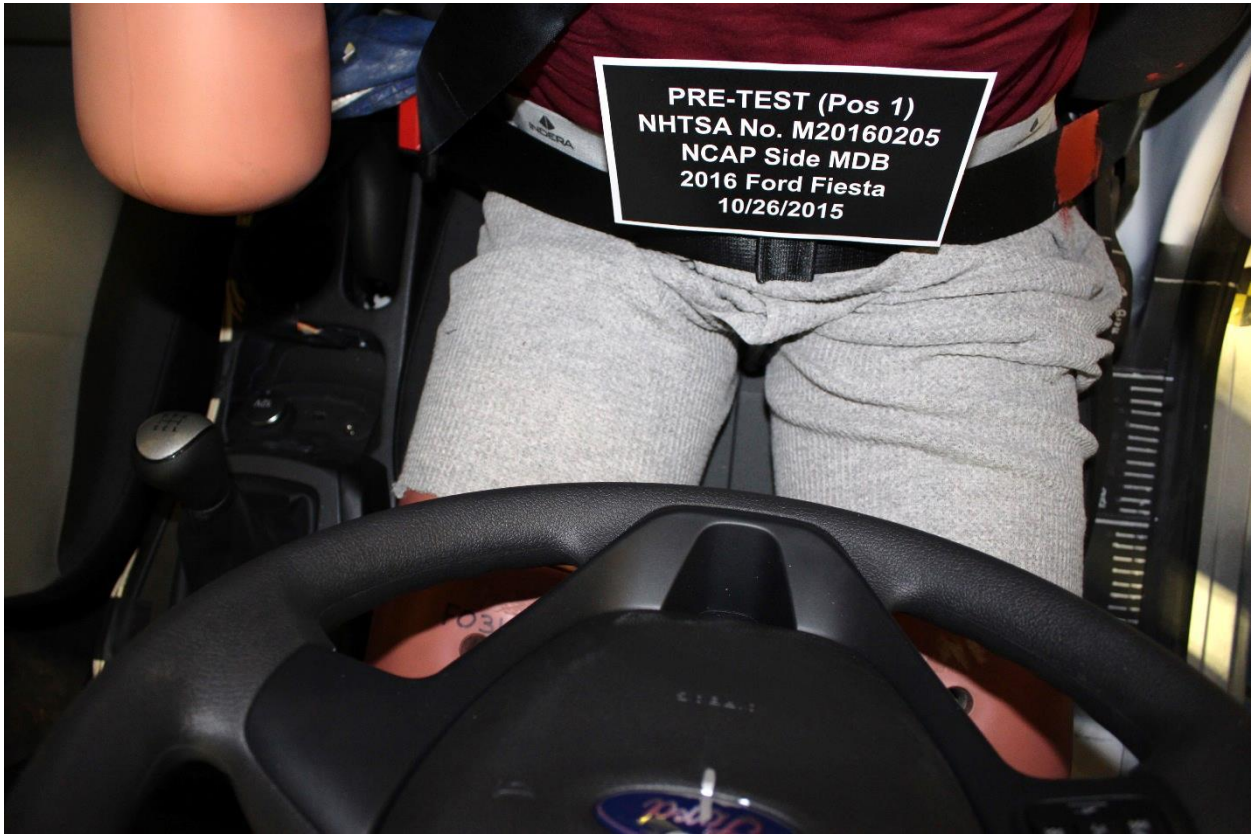


Figure A-33: Pre-Test Overhead View of Driver Dummy Thighs on Seat Pan



Figure A-34: Pre-Test Placement of Driver Dummy's Feet

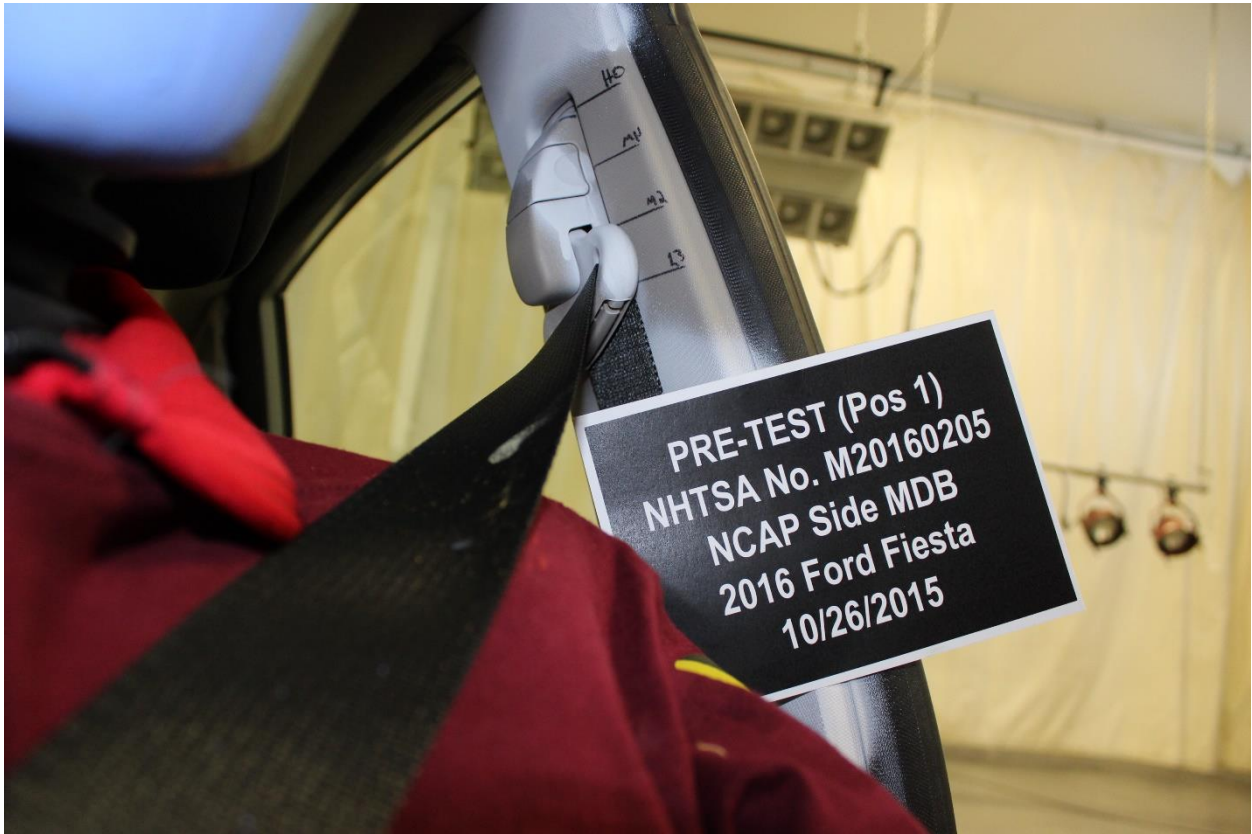


Figure A-35: Pre-Test View of Belt Anchorage for Driver Dummy



Figure A-36: Pre-Test Left Side View of Steering Wheel



Figure A-37: View of Disengaged Parking Brake



Figure A-38: Pre-Test View of Parking Brake

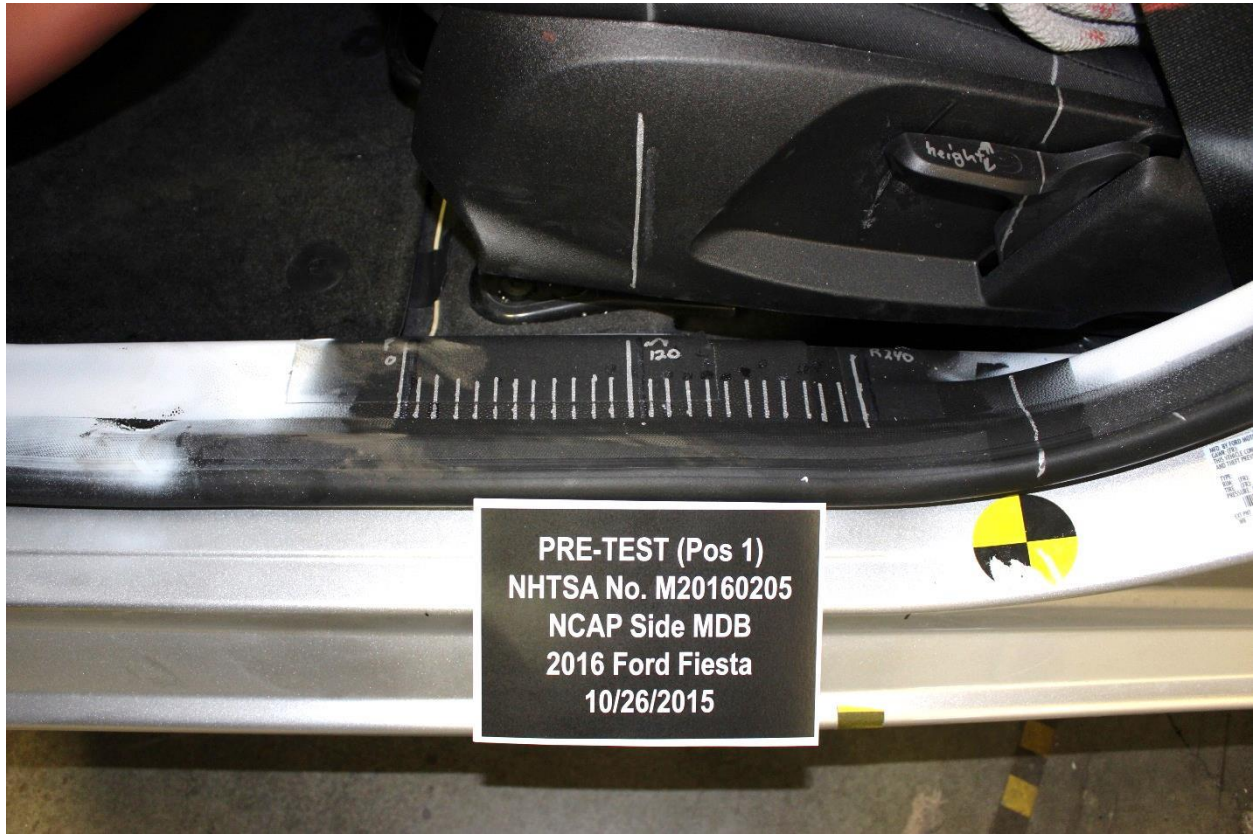


Figure A-39: Pre-test Close-Up Left Side View of Driver Seat Track



Figure A-40: Pre-Test Close-Up Left Side View of Driver Seat Back



Figure A-41: Pre-Test Close-Up View of Driver Seat Back or Head Restraint



Figure A-42: Pre-Test Driver Dummy and Door Clearance View



Figure A-43: Post-Test Driver Dummy and Door Clearance View



Figure A-44: Pre-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment



Figure A-45: Post-Test Right Side View of Driver Dummy and Front Seat of Occupant Compartment



Figure A-46: Pre-Test Driver Inner Door Panel View



Figure A-47: Post-Test Driver Inner Door Panel View



Figure A-48: Post-Test Driver Dummy Close-Up Head Contact with Vehicle View



Figure A-49: Post-Test Driver Dummy Close-Up Head Contact with Side Airbag View



Figure A-50: Post-Test Driver Dummy Close-Up Torso Contact with Vehicle Interior View



Figure A-51: Post-Test Driver Dummy Close-Up Torso Contact with Side Airbag View

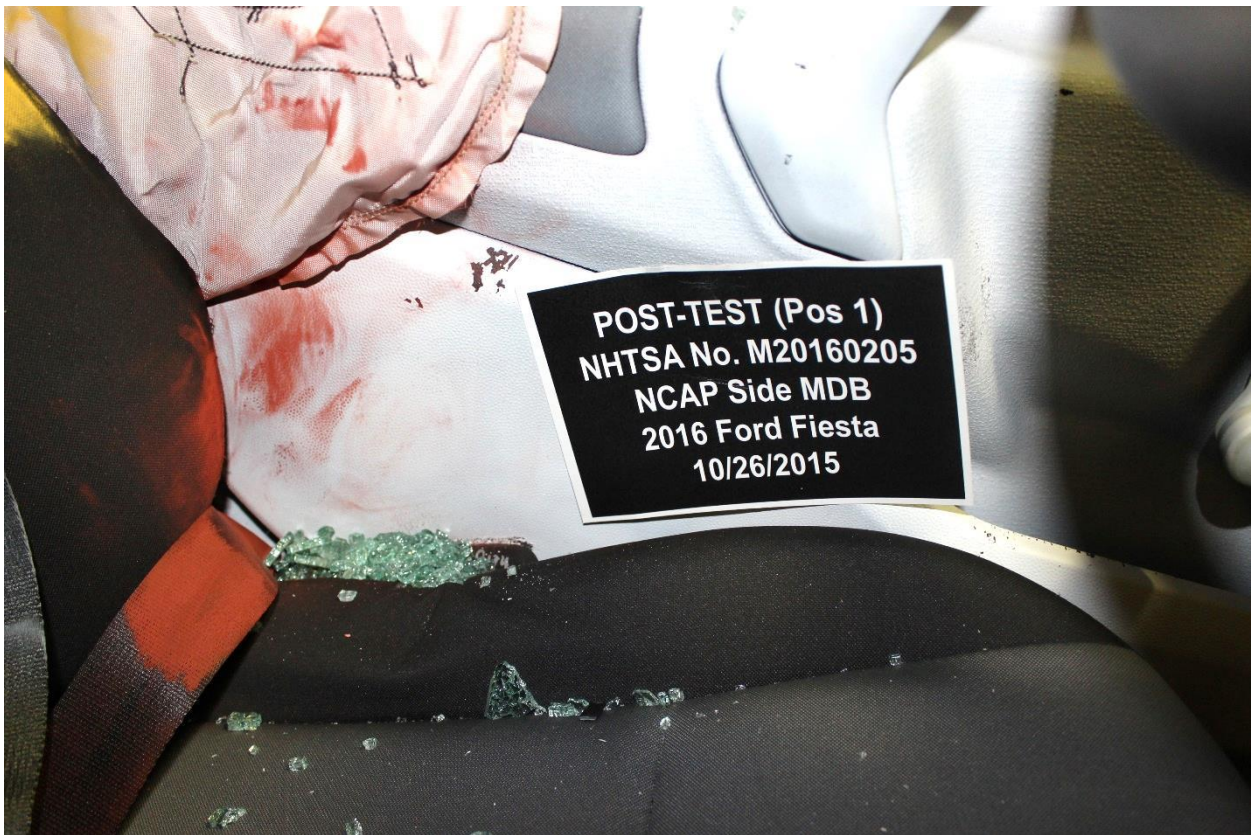


Figure A-52: Post-Test Driver Dummy Close-Up Pelvis Contact View

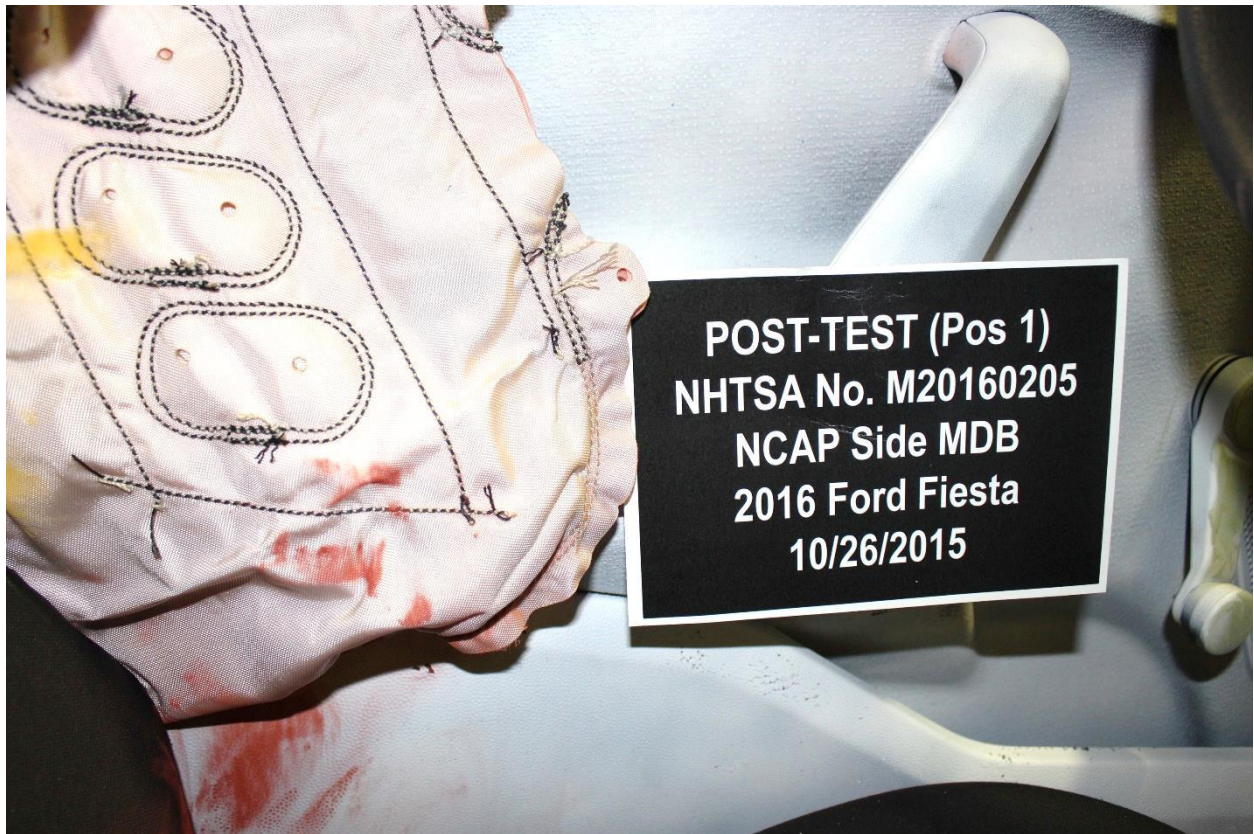


Figure A-53: Post-Test Driver Dummy Close-Up Pelvis Contact with Side Airbag View



Figure A-54: Post-Test Driver Dummy Close-Up Knee Contact View



Figure A-55: Pre-Test Left Side View of Passenger Dummy Showing Belt and Chalking



Figure A-56: Pre-Test Left Side View of Passenger Dummy Shoulder and Door Top View



Figure A-57: Post-Test Left Side View of Passenger Dummy Shoulder and Door Top View



Figure A-58: Pre-Test Frontal View of Rear Passenger Seat Back Prior to Dummy Positioning

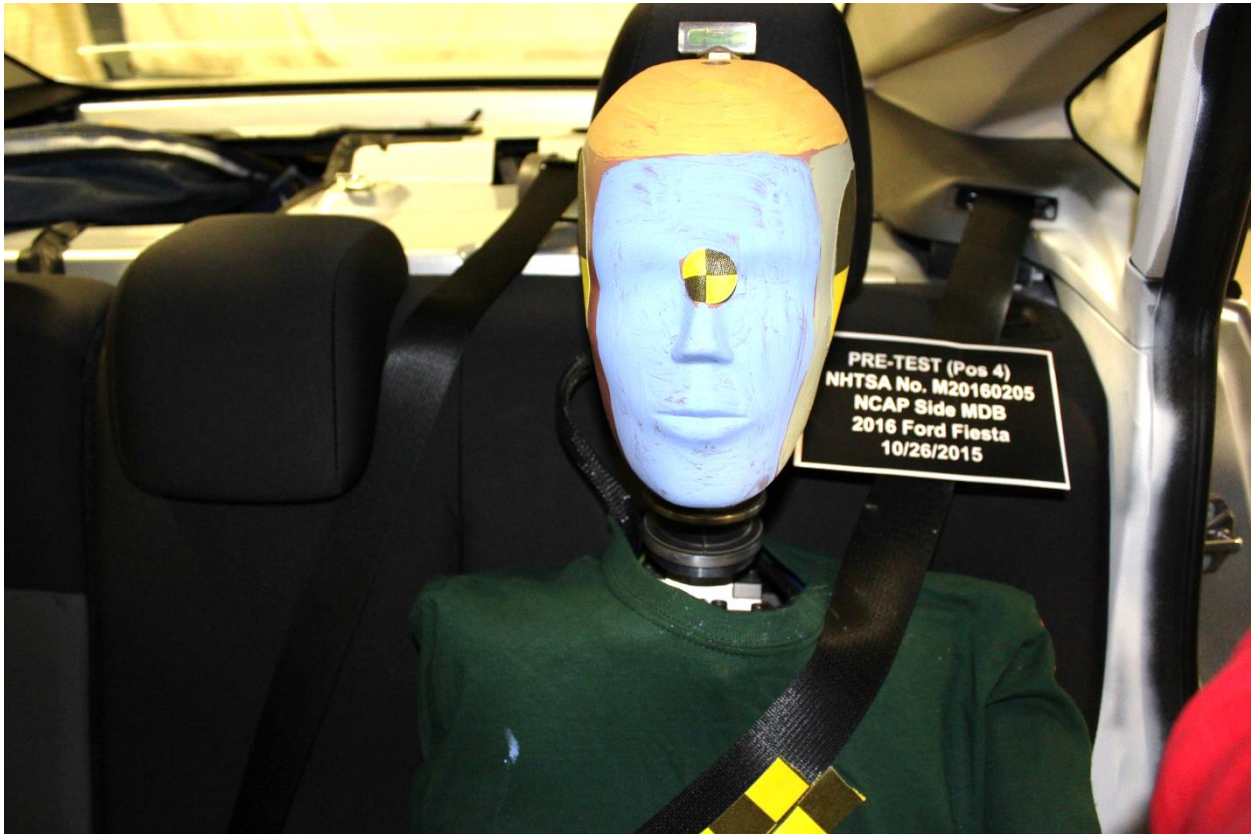


Figure A-59: Pre-Test Frontal View of Rear Passenger Dummy Head and Shoulders in Relation to Head Restraint



Figure A-60: Pre-Test Overhead View of Rear Passenger Seat Pan Prior to Dummy Positioning

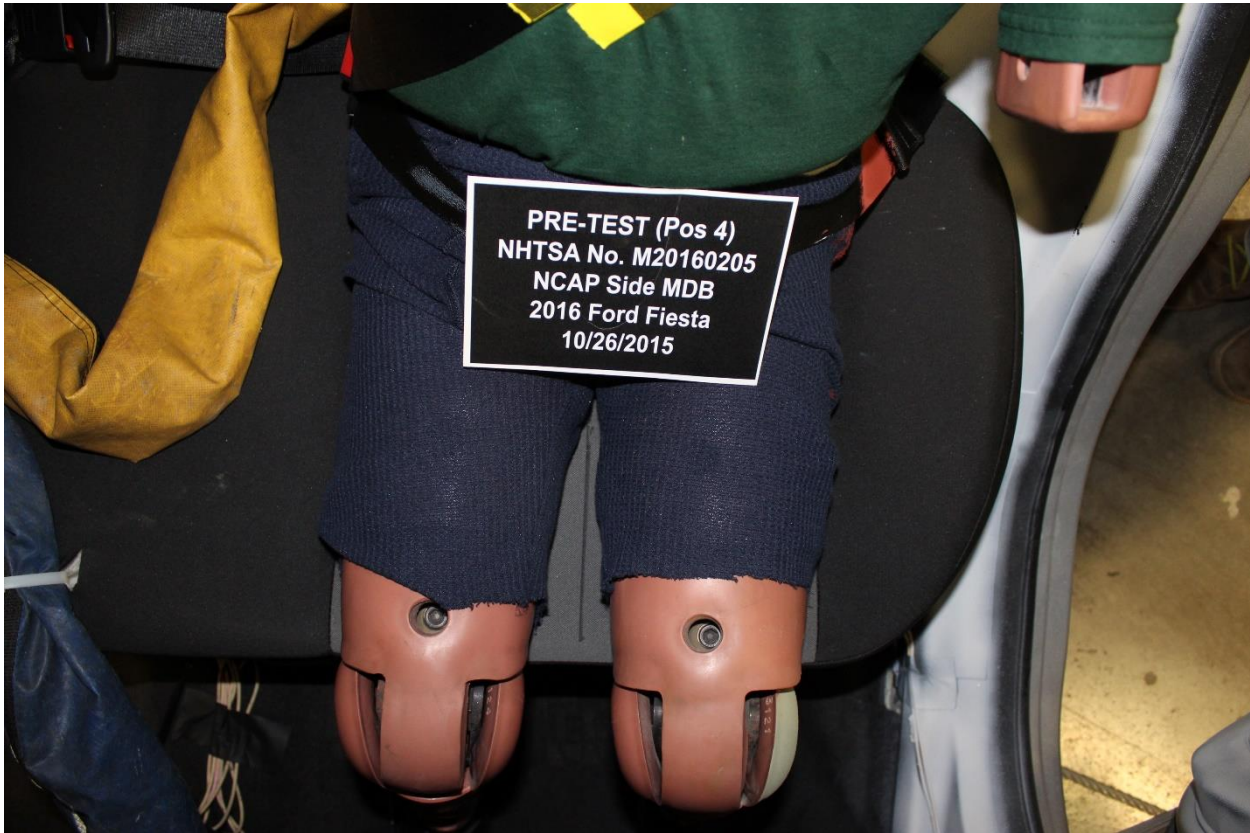


Figure A-61: Pre-Test Overhead View of Rear Passenger Dummy Thighs on Seat Pan

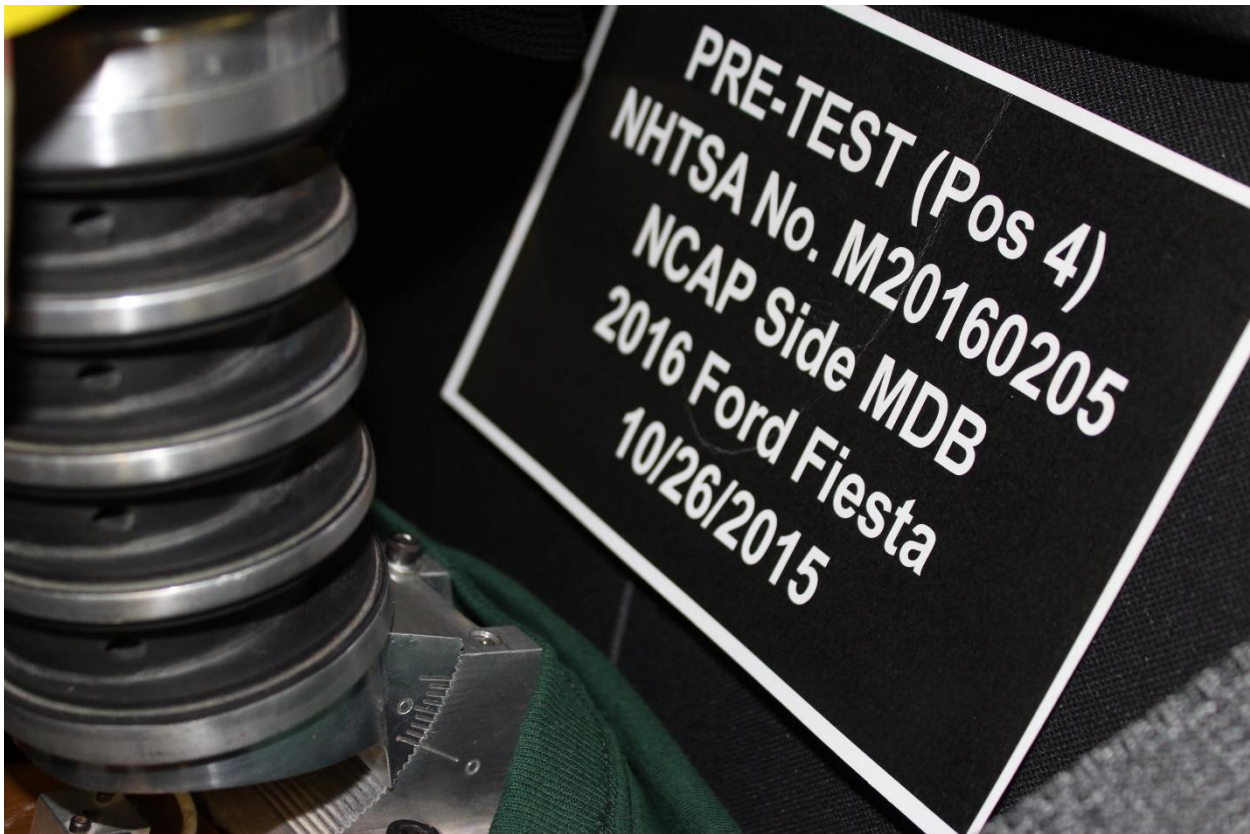


Figure A-62: Pre-Test View of Rear Passenger Dummy's Neck Showing Position of Adjustable Neck Bracket



Figure A-63: Pre-Test View of Rear Passenger Dummy's Head Showing Dummy's Head Level



Figure A-64: Pre-Test Placement of Rear Passenger Dummy's Feet

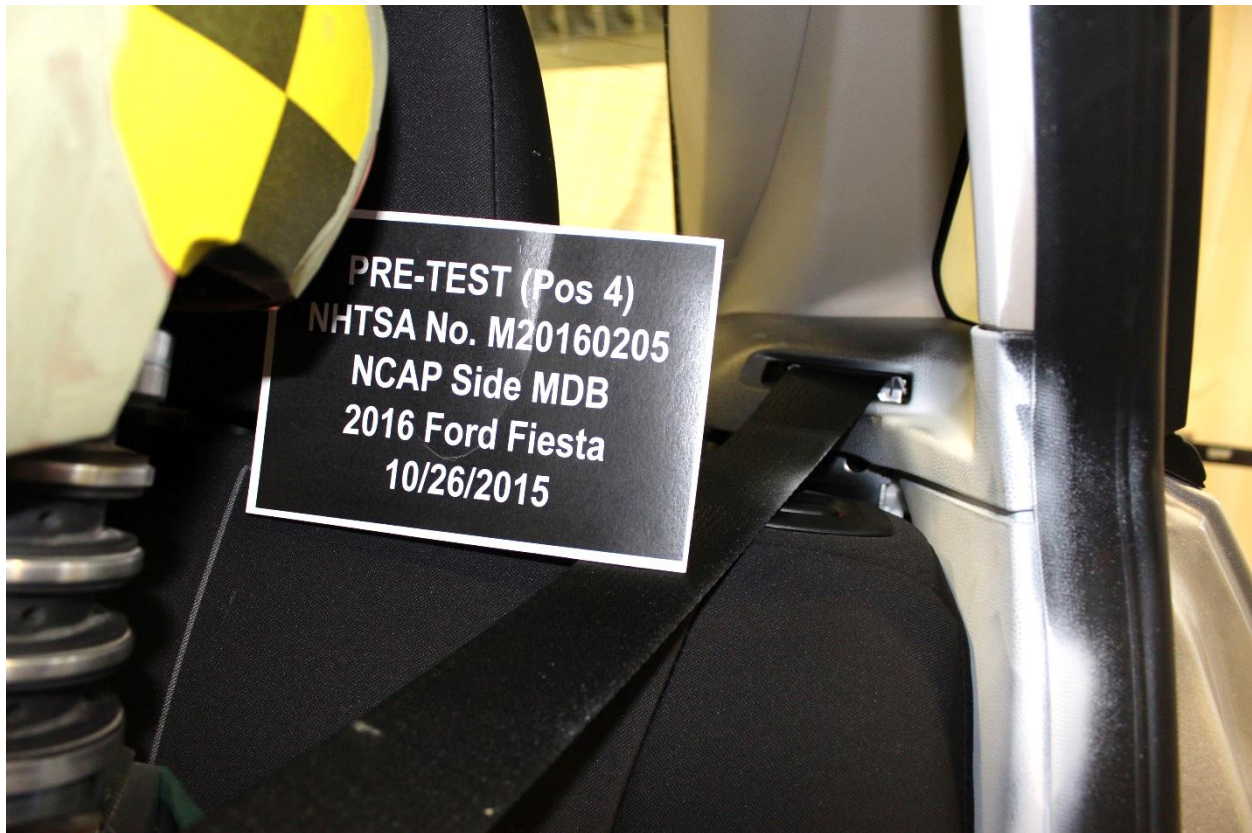


Figure A-65: Pre-Test View of Belt Anchorage for Rear Passenger Dummy



Figure A-66: Pre-Test Close-Up Left Side View of Rear Passenger Seat Track



Figure A-67: Pre-Test Close-Up Left Side View of Rear Passenger Seat Back



Figure A-68: Pre-Test Close-Up View of Rear Passenger Seat Back or Head Restraint



Figure A-69: Pre-Test Passenger Dummy and Door Clearance View



Figure A-70: Post-Test Passenger Dummy and Door Clearance View



Figure A-71: Pre-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment



Figure A-72: Post-Test Right Side View of Rear Passenger Dummy and Rear Seat Occupant Compartment



Figure A-73: Pre-Test Passenger Inner Door Panel View



Figure A-74: Post-Test Passenger Inner Door Panel View



Figure A-75: Post-Test Rear Passenger Dummy Close-Up Head Contact with Vehicle View



Figure A-76: Post-Test Rear Passenger Dummy Close-Up Head Contact with Side Airbag View



Figure A-77: Post-Test Rear Passenger Dummy Close-Up Torso Contact with Vehicle Interior View

Photo Not Applicable

Figure A-78: Post-Test Rear Passenger Dummy Close-Up Torso Contact with Side Airbag View



Figure A-79: Post-Test Rear Passenger Dummy Close-Up Pelvis Contact View

Photo Not Applicable

Figure A-80: Post-Test Rear Passenger Dummy Close-Up Pelvis Contact with Side Airbag View

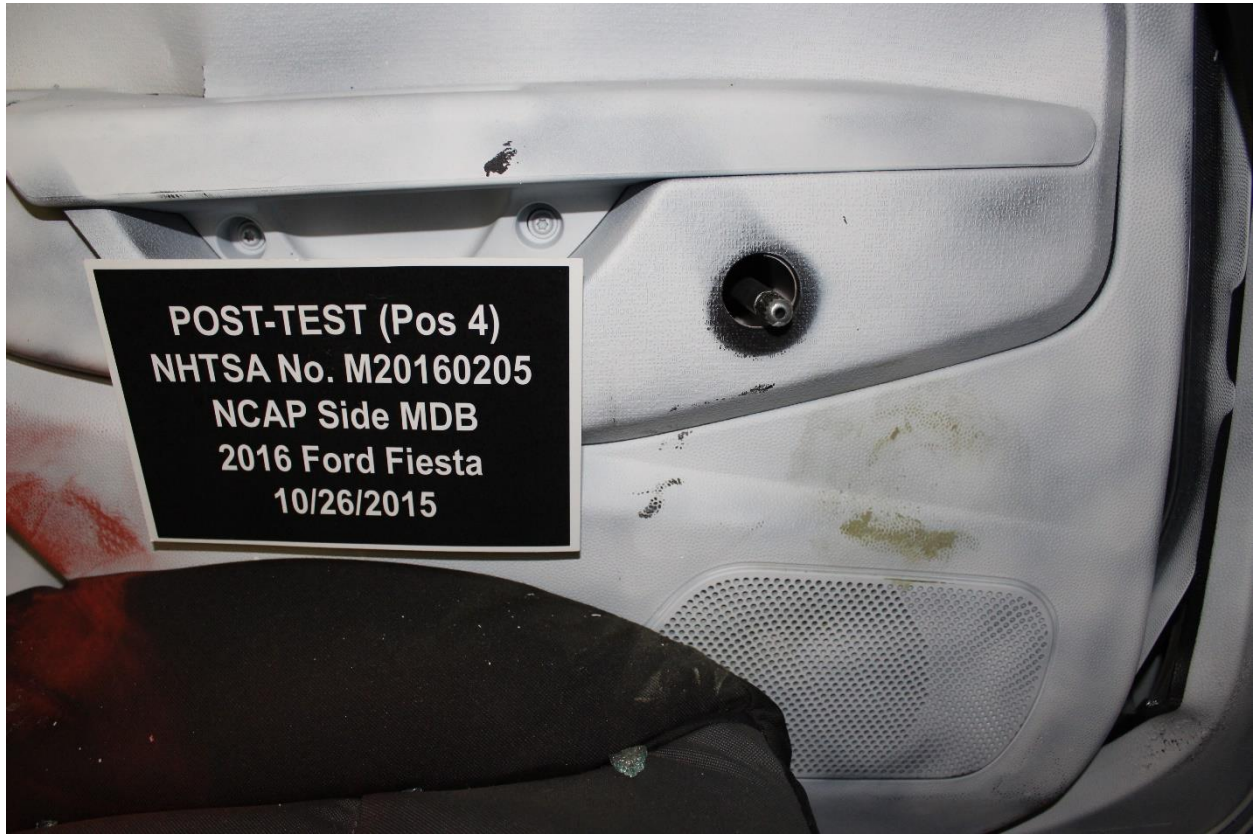


Figure A-81: Post-Test Rear Passenger Dummy Close-Up Knee Contact View



Figure A-82: Pre-Test View of Fuel Filler Cap or Fuel Filler Neck



Figure A-83: Post-Test View of Fuel Filler Cap or Fuel Filler Neck

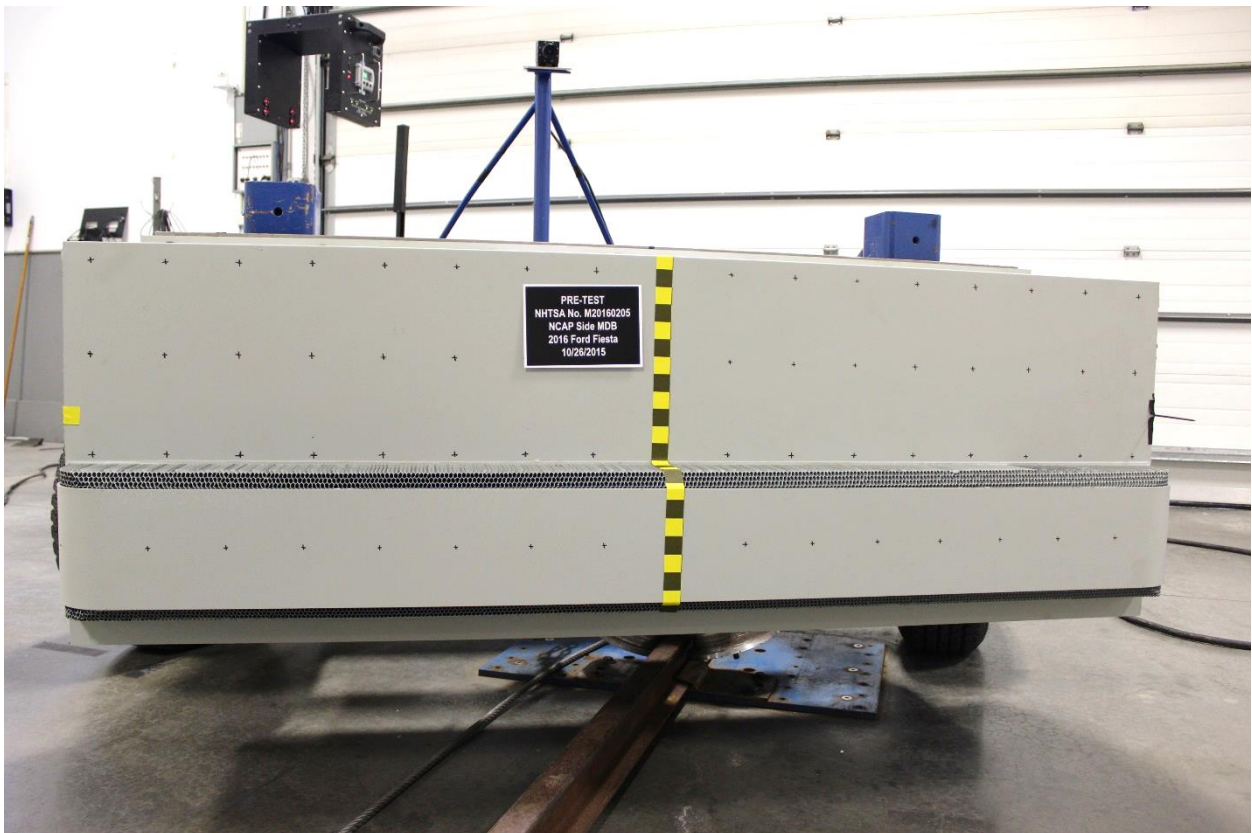


Figure A-84: Pre-Test Front View of MDB Impactor Face

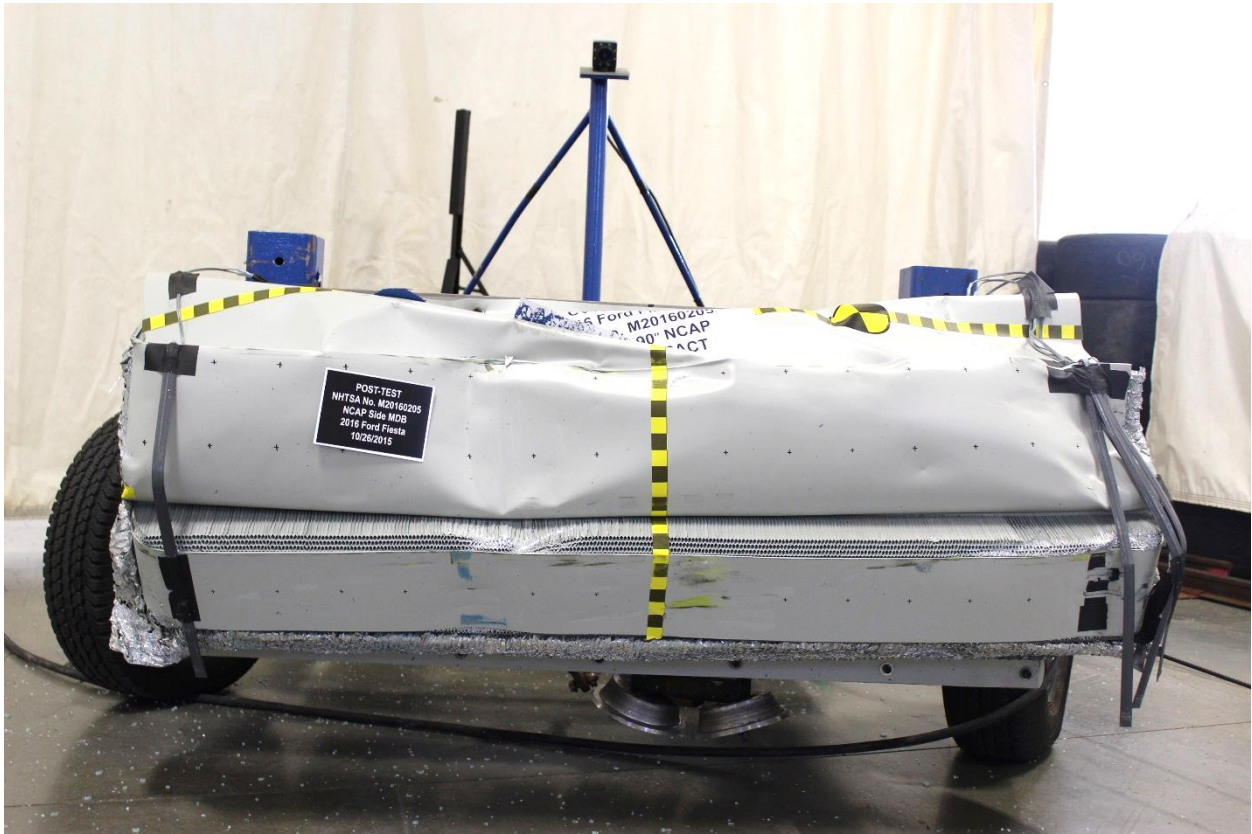


Figure A-85: Post-Test Front View of MDB Impactor Face



Figure A-86: Pre-Test Top View of MDB Impactor Face



Figure A-87: Post-Test Top View of MDB Impactor Face



Figure A-88: Pre-Test Left Side View of MDB Impactor Face



Figure A-89: Post-Test Left Side View of MDB Impactor Face



Figure A-90: Pre-Test Right Side View of MDB Impactor Face



Figure A-91: Post-Test Right Side View of MDB Impactor Face

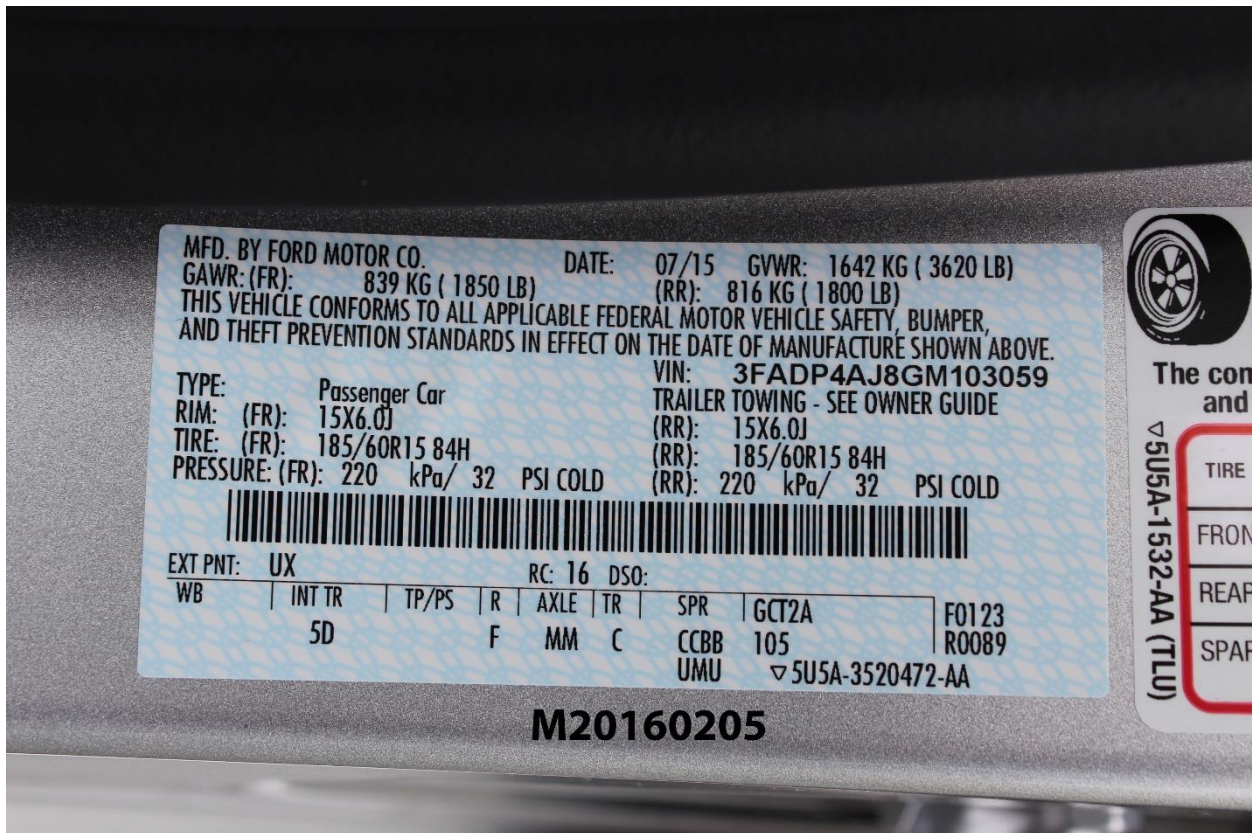


Figure A-92: Close-Up View of Vehicle's Certification Label

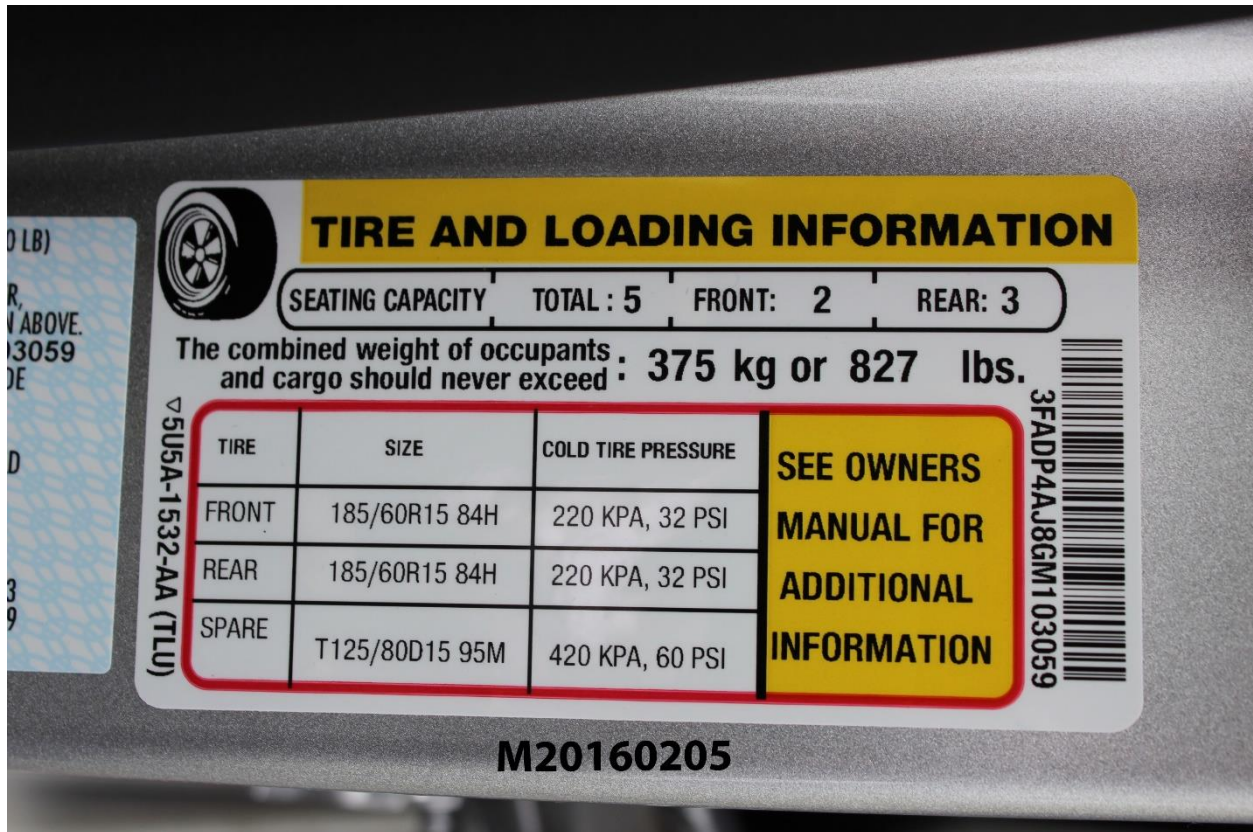


Figure A-93: Close-Up View of Vehicle's Tire Information Placard or Label



Figure A-94: Pre-Test Ballast View



Figure A-95: Post-Test Primary and Redundant Speed Trap Read-Out



Figure A-96: FMVSS No. 301 Static Rollover 0 Degrees

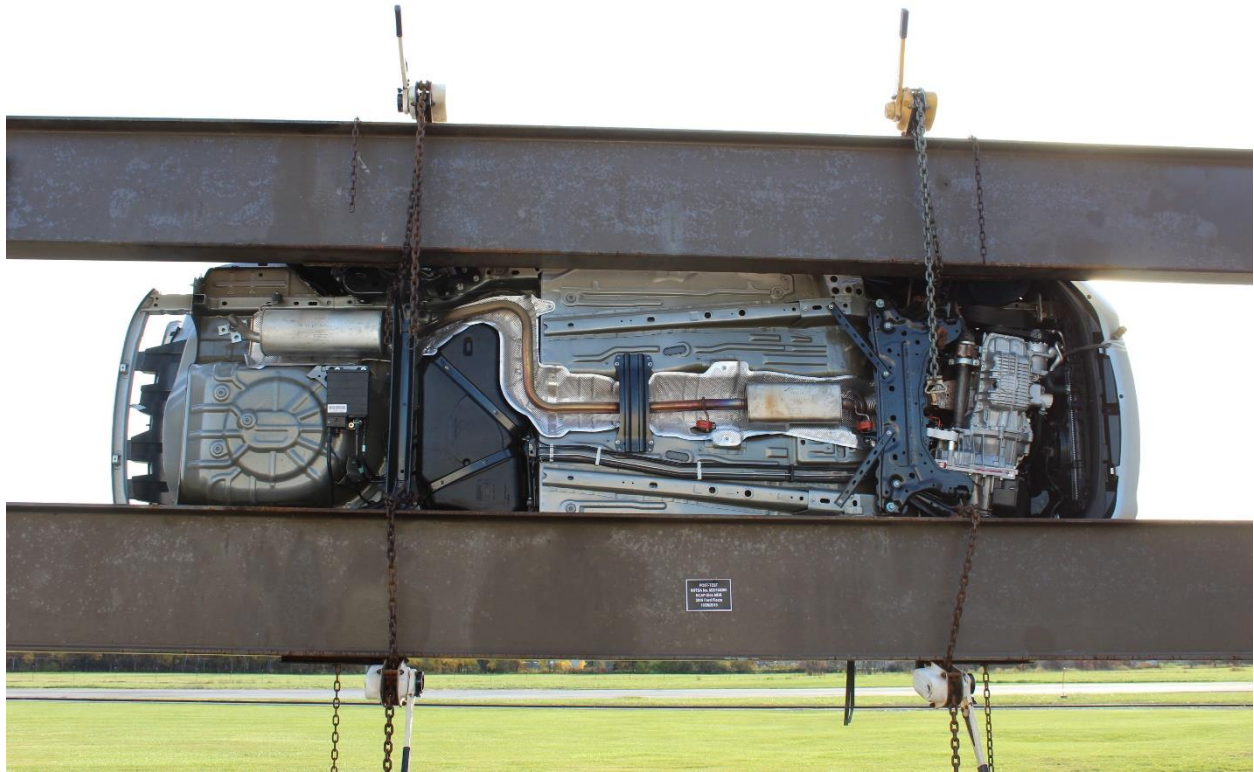


Figure A-97: FMVSS No. 301 Static Rollover 90 Degrees



Figure A-98: FMVSS No. 301 Static Rollover 180 Degrees




Figure A-99: FMVSS No. 301 Static Rollover 270 Degrees



Figure A-100: FMVSS No. 301 Static Rollover 360 Degrees

Seats

Rear seat center head restraint



E138645


The head restraints consist of:

- A Energy absorbing head restraint.
- B Steel stems.
- C Guide sleeve adjust and unlock button.
- D Guide sleeve unlock and remove button.
- E Tilt button.

WARNINGS
Install the head restraint properly to help minimize the risk of neck injury in the event of a crash.


Note: Adjust the seat backrest to an upright driving position before adjusting the head restraint. Adjust the head restraint so that the top of it is level with the top of your head and as far forward as possible. Make sure that you remain comfortable. If you are extremely tall, adjust the head restraint to its highest position.

Front seat head restraint



E138642

Rear seat outboard head restraints



E138643

Adjusting the Head Restraint

Raising the Head Restraint

Pull the head restraint up.

Lowering the Head Restraint

1. Press and hold button C.
2. Push the head restraint down.

Removing the Head Restraint

1. Pull the head restraint up until it reaches its highest position.
2. Press and hold buttons C and D.
3. Pull the head restraint up.

Installing the Head Restraint

Align the steel stems into the guide sleeves and push the head restraint down until it locks.

104


Seats

WARNINGS

Install the head restraint properly to help minimize the risk of neck injury in the event of a crash.


Note: Adjust the seat backrest to an upright driving position before adjusting the head restraint. Adjust the head restraint so that the top of it is level with the top of your head and as far forward as possible. Make sure that you remain comfortable. If you are extremely tall, adjust the head restraint to its highest position.

Front seat head restraint



E138642

Rear seat outboard head restraints



E138643

Adjusting the Head Restraint

Raising the Head Restraint

Pull the head restraint up.

Lowering the Head Restraint

1. Press and hold button C.
2. Push the head restraint down.

Removing the Head Restraint

1. Pull the head restraint up until it reaches its highest position.
2. Press and hold buttons C and D.
3. Pull the head restraint up.

Installing the Head Restraint

Align the steel stems into the guide sleeves and push the head restraint down until it locks.

104

Figure A-103: Driver Head Restraint Use and Adjustment Information from Vehicle Owner's Manual

Figure A-104: Left Rear Passenger Head Restraint Use and Adjustment Information from Vehicle Owner's Manual

APPENDIX B

VEHICLE AND DUMMY RESPONSE DATA PLOTS

TABLE OF DATA PLOTS

Driver & Passenger Dummy Instrumentation Plots

Fig.	Description	Page
1	Driver Head Acceleration (X) Primary vs. Time	B-5
2	Driver Head Acceleration (Y) Primary vs. Time	B-5
3	Driver Head Acceleration (Z) Primary vs. Time	B-5
4	Driver Head Resultant Acceleration Primary vs. Time	B-5
5	Driver Upper Thorax Rib Deflection (Y) vs. Time	B-6
6	Driver Middle Thorax Rib Deflection (Y) vs. Time	B-6
7	Driver Lower Thorax Rib Deflection (Y) vs. Time	B-6
8	Driver Thorax Rib Deflection Maximum vs. Time	B-6
9	Driver Anterior Abdominal Force (Y) vs. Time	B-7
10	Driver Middle Abdominal Force (Y) vs. Time	B-7
11	Driver Posterior Abdominal Force (Y) vs. Time	B-7
12	Driver Total Abdominal Force (Y) vs. Time	B-7
13	Driver Pubic Symphysis Force (Y) vs. Time	B-8
14	Passenger Head Acceleration (X) vs. Time Primary	B-8
15	Passenger Head Acceleration (Y) vs. Time Primary	B-8
16	Passenger Head Acceleration (Z) vs. Time Primary	B-8
17	Passenger Head Resultant Acceleration Primary vs. Time	B-9
18	Passenger Lower Spine T12 Acceleration (X) vs. Time	B-9
19	Passenger Lower Spine T12 Acceleration (Y) vs. Time	B-9
20	Passenger Lower Spine T12 Acceleration (Z) vs. Time	B-9
21	Passenger Lower Spine T12 Resultant Acceleration vs. Time	B-10
22	Passenger Iliac Force on Impact Side (Y) vs. Time	B-10
23	Passenger Acetabulum Force on Impact Side (Y) vs. Time	B-10
24	Passenger Total Pelvic Force on Impact Side (Y) vs. Time	B-10

The following additional data for this test can be obtained from the Research and Development section of the NHTSA website. The website can be found at www.NHTSA.dot.gov.

Additional Driver & Passenger Dummy Instrumentation Data





Driver Lower Spine T12 Acceleration (X)
Driver Lower Spine T12 Acceleration (Y)
Driver Lower Spine T12 Acceleration (Z)
Passenger Upper Thorax Rib Deflection (Y)
Passenger Middle Thorax Rib Deflection (Y)
Passenger Lower Thorax Rib Deflection (Y)
Passenger Upper Abdomen Rib Deflection (Y)
Passenger Lower Abdomen Rib Deflection (Y)
Driver Head Acceleration Redundant (X)
Driver Head Acceleration Redundant (Y)
Driver Head Acceleration Redundant (Z)
Passenger Head Acceleration Redundant (X)
Passenger Head Acceleration Redundant (Y)
Passenger Head Acceleration Redundant (Z)

Vehicle Instrumentation Data


Vehicle Center of Gravity Acceleration (X)
Vehicle Center of Gravity Acceleration (Y)
Vehicle Center of Gravity Acceleration (Z)
Right Side Sill at Front Seat Acceleration (X)
Right Side Sill at Front Seat Acceleration (Y)
Right Side Sill at Front Seat Acceleration (Z)
Right Side Sill at Rear Seat Acceleration (X)
Right Side Sill at Rear Seat Acceleration (Y)
Right Side Sill at Rear Seat Acceleration (Z)
Left Side Sill at Front Seat Acceleration (Y)
Left Side Sill at Rear Seat Acceleration (Y)
Lower A-Post Acceleration (Y)
Middle A-Post Acceleration (Y)
Lower B-Post Acceleration (Y)
Middle B-Post Acceleration (Y)
Front Seat Track Acceleration (Y)
Rear Seat Structure Acceleration (Y)
Right Rear Occupant Compartment Acceleration (Y)
Engine Block (X)
Engine Block (Y)
Rear Floorpan Above Axle Acceleration (X)
Rear Floorpan Above Axle Acceleration (Y)
Rear Floorpan Above Axle Acceleration (Z)

MDB Instrumentation Data


MDB Center of Gravity Acceleration (X)
MDB Center of Gravity Acceleration (Y)
MDB Center of Gravity Acceleration (Z)
MDB Rear Acceleration (X)
MDB Rear Acceleration (Y)
Left MDB Contact Switch
Right MDB Contact Switch

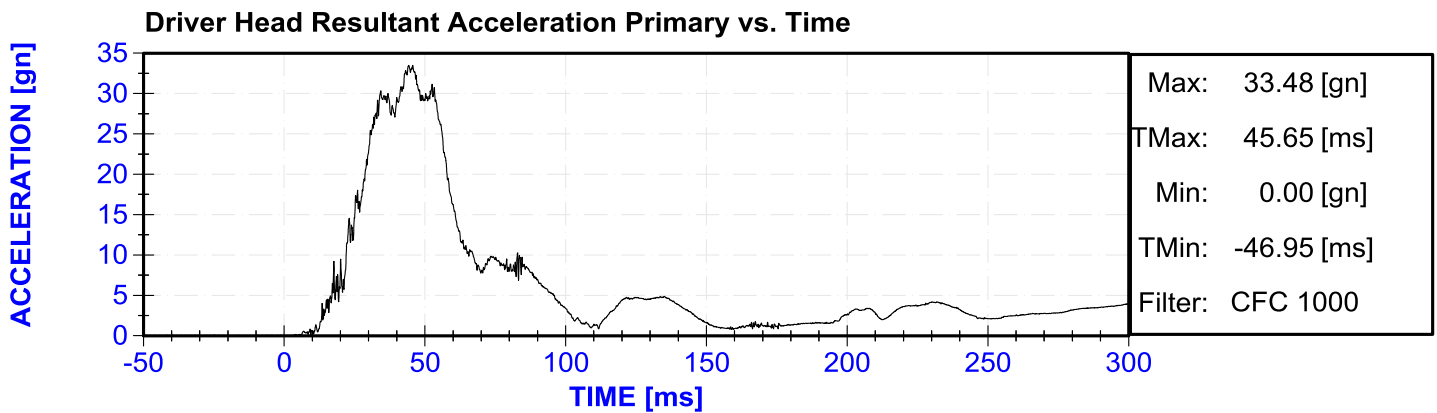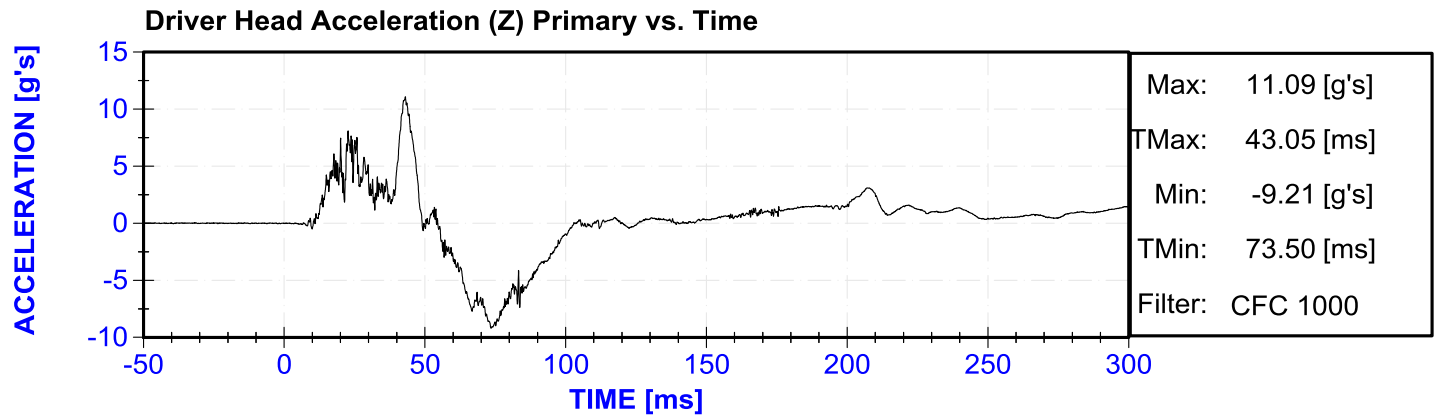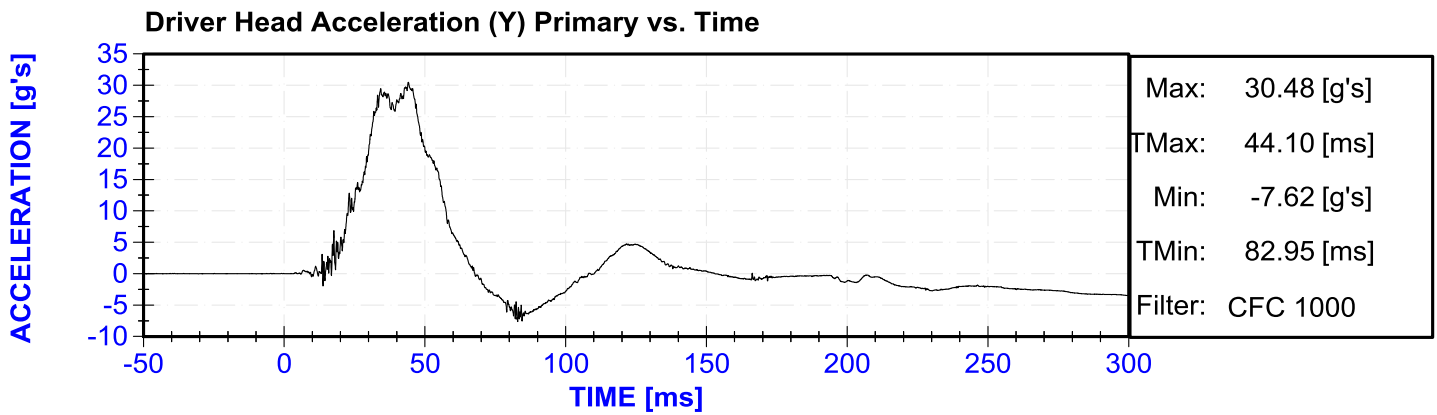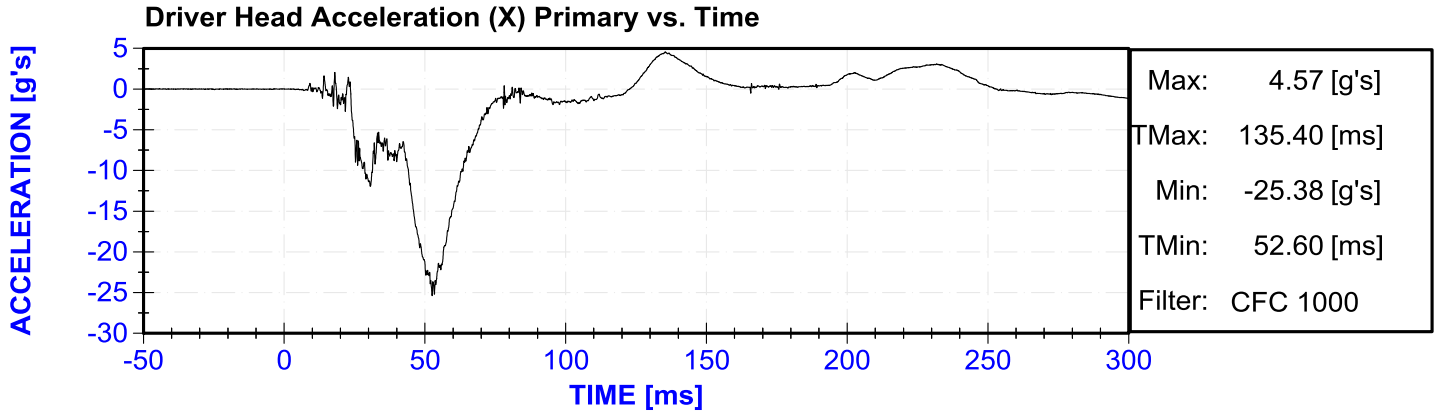


Driver Upper Thorax Rib Deflection (Y) vs. Time

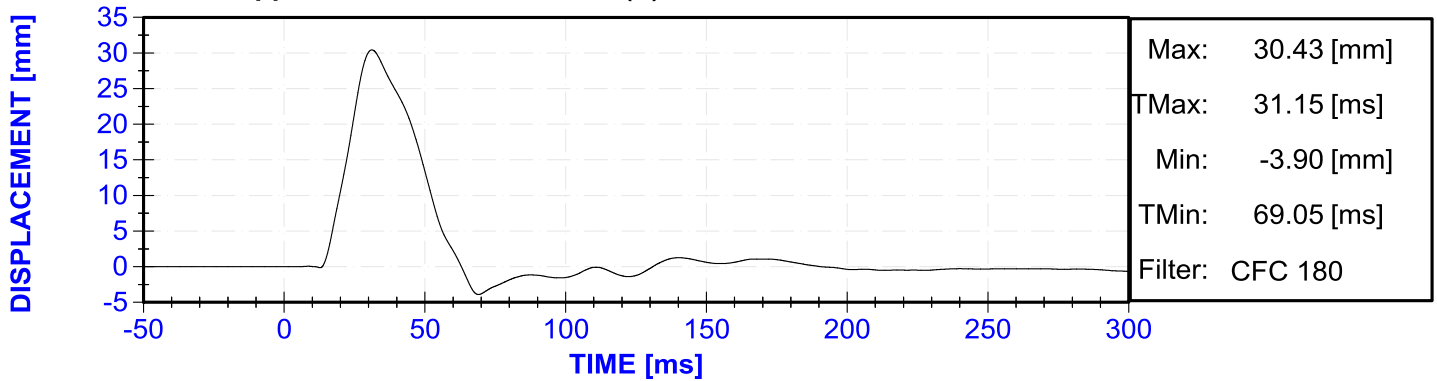


Driver Middle Thorax Rib Deflection (Y) vs. Time




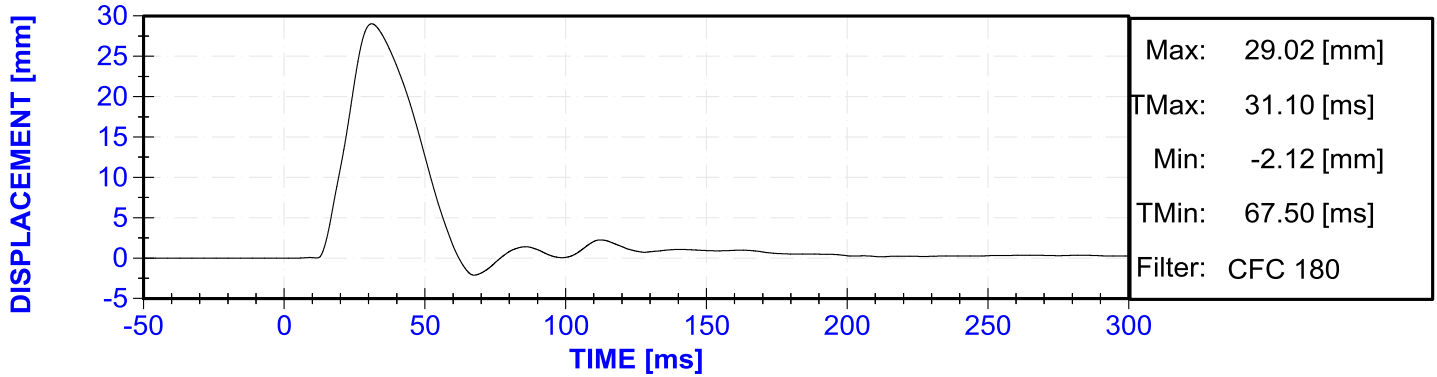






Driver Lower Thorax Rib Deflection (Y) vs. Time

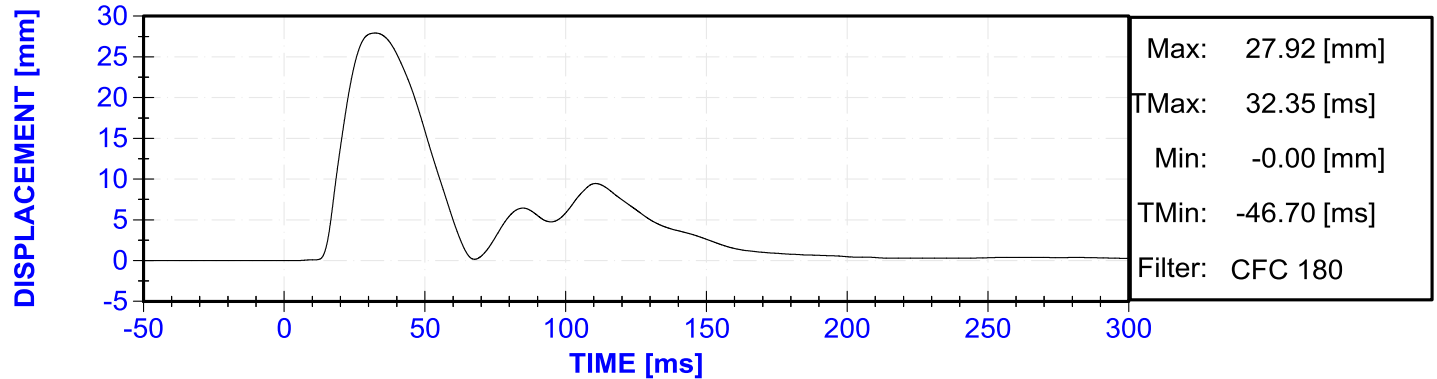


Driver Thorax Rib Deflection Maximum vs. Time

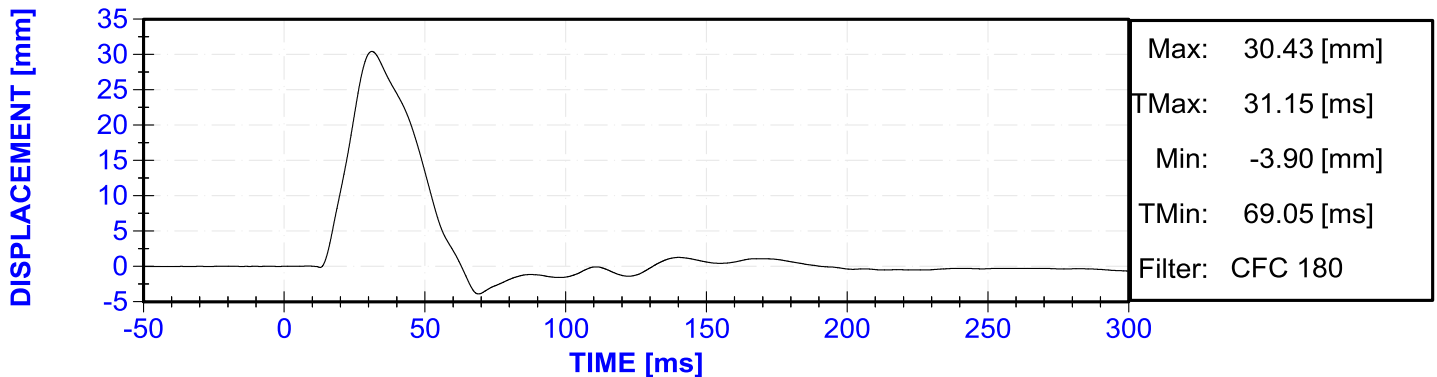

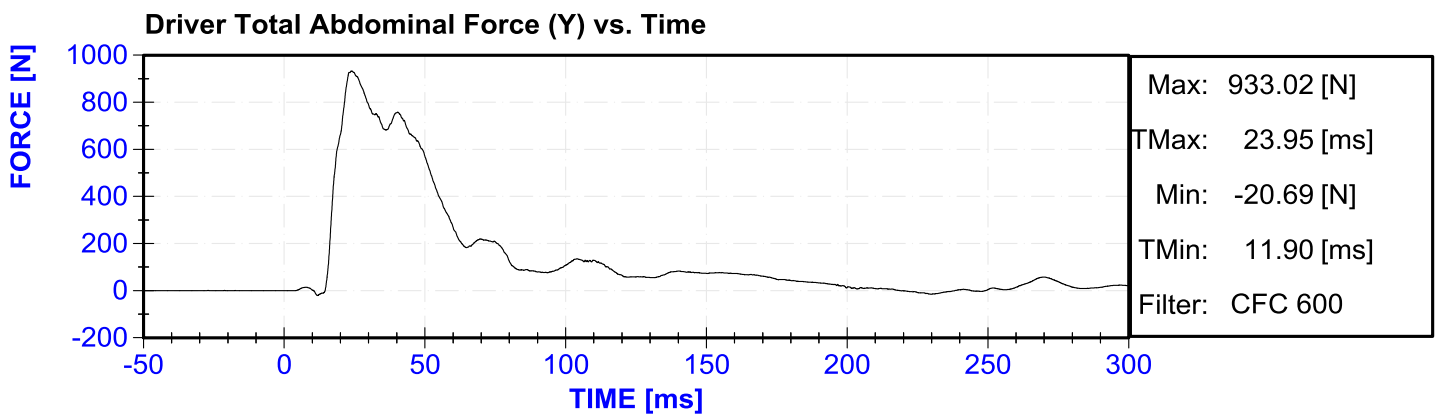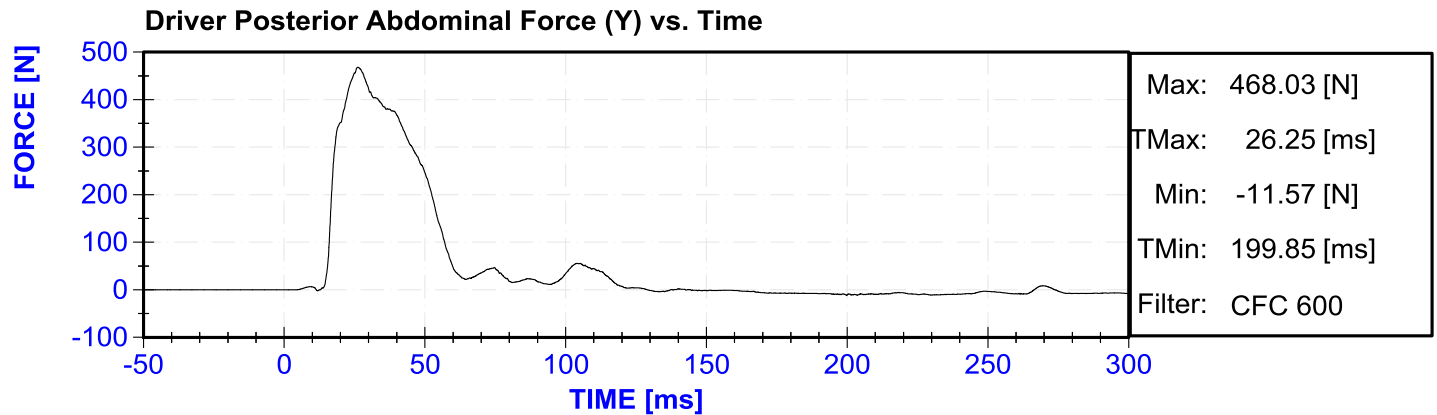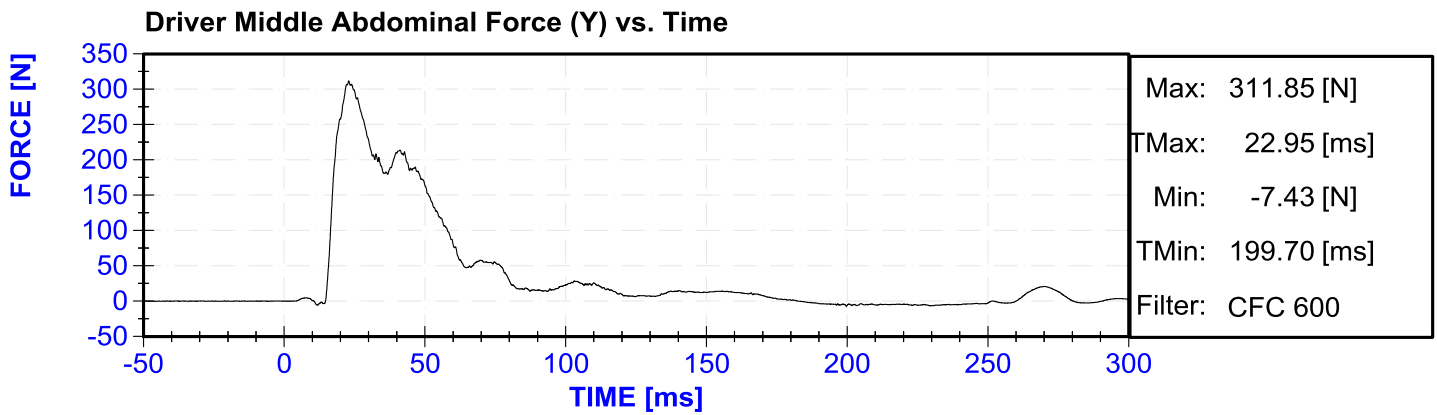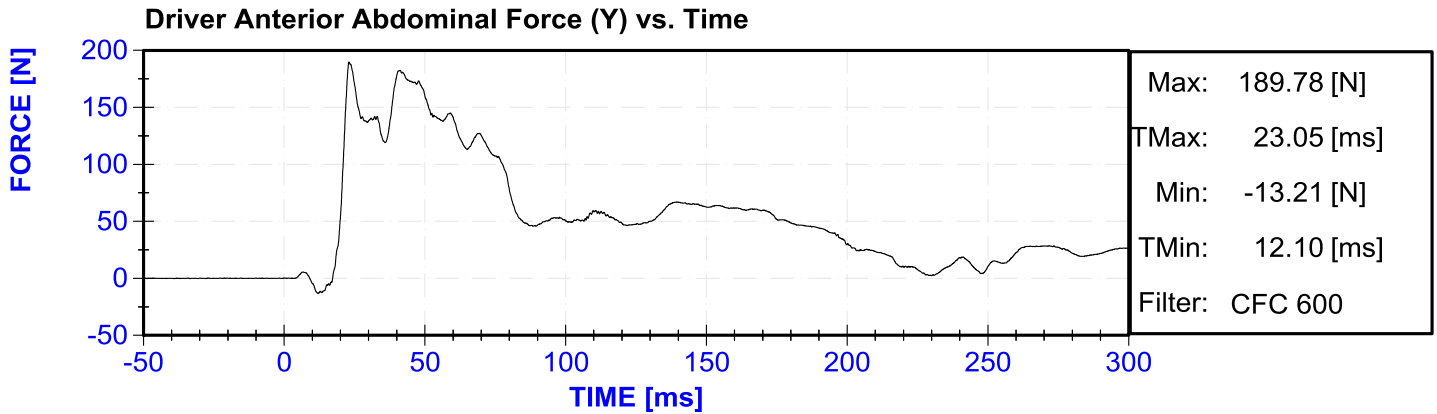


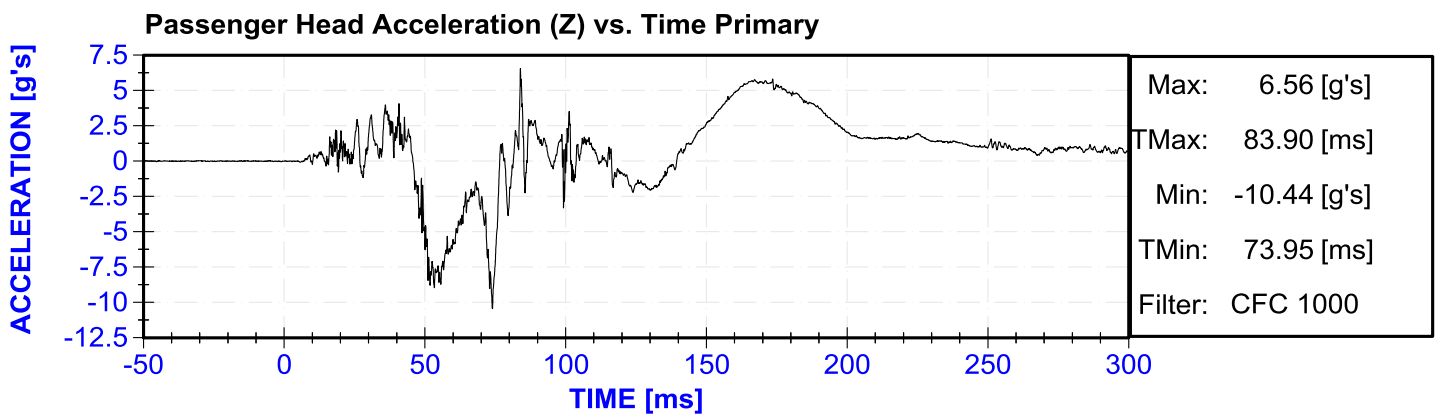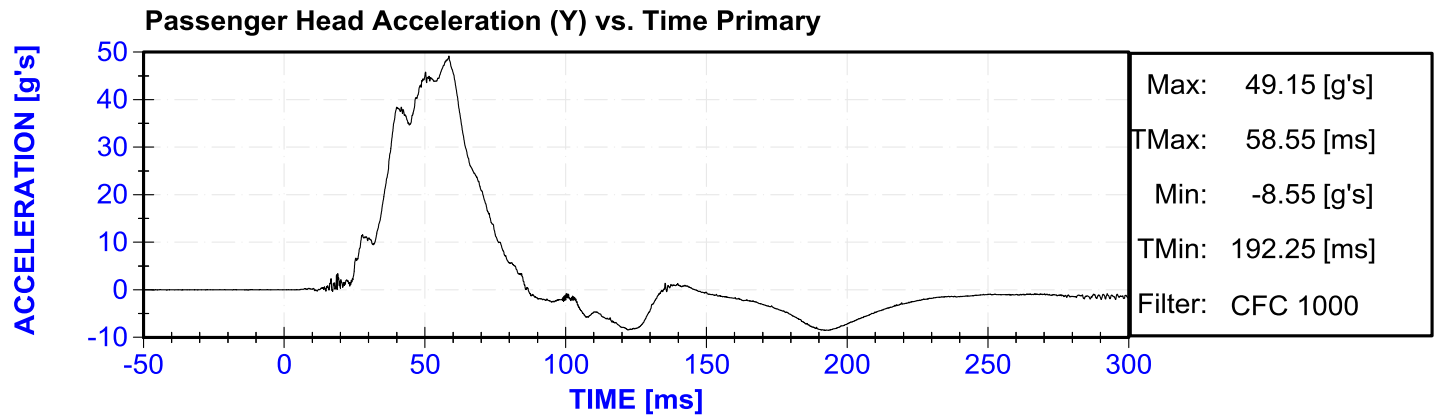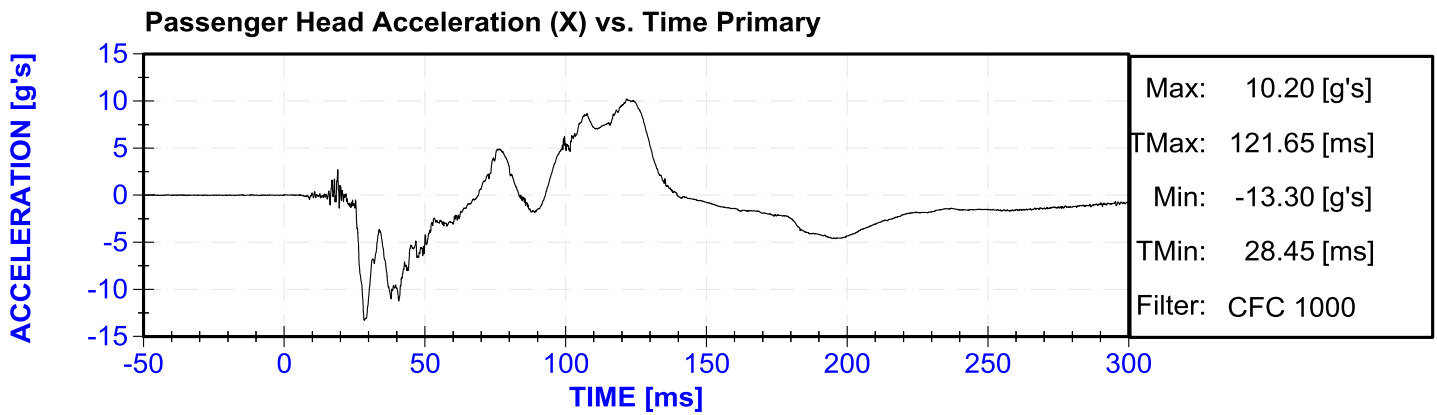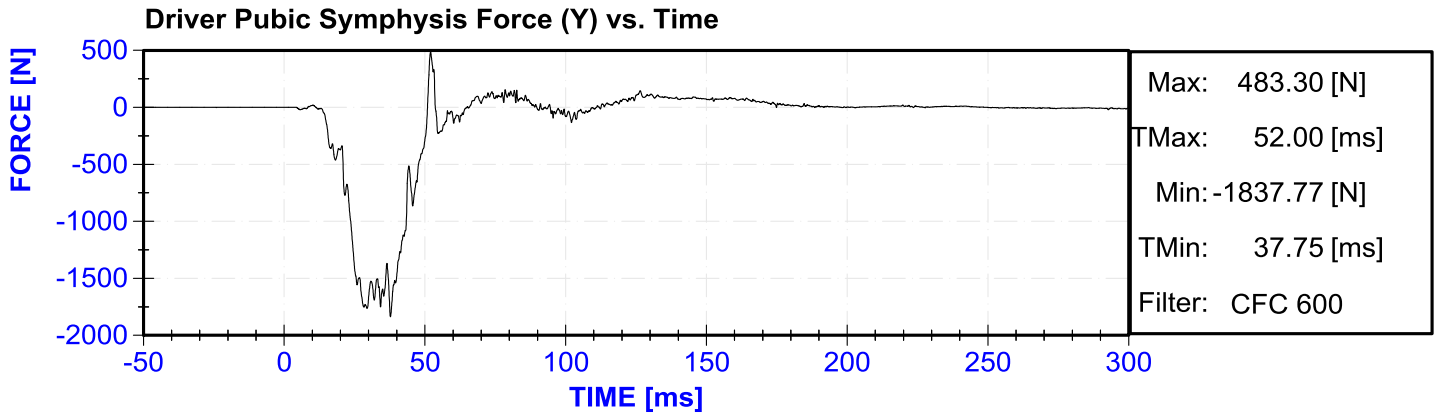


Passenger Head Resultant Acceleration Primary vs. Time

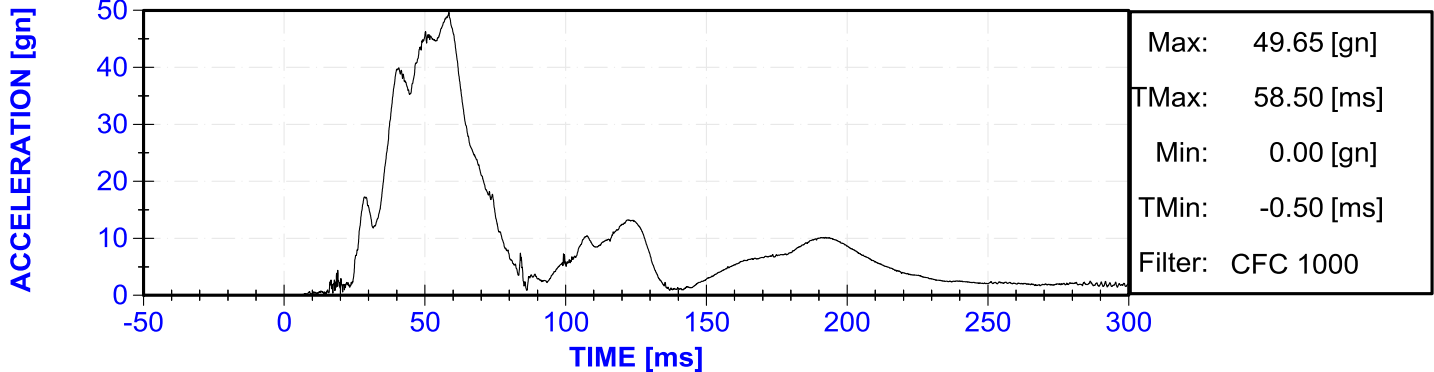


Passenger Lower Spine T12 Acceleration (X) vs. Time

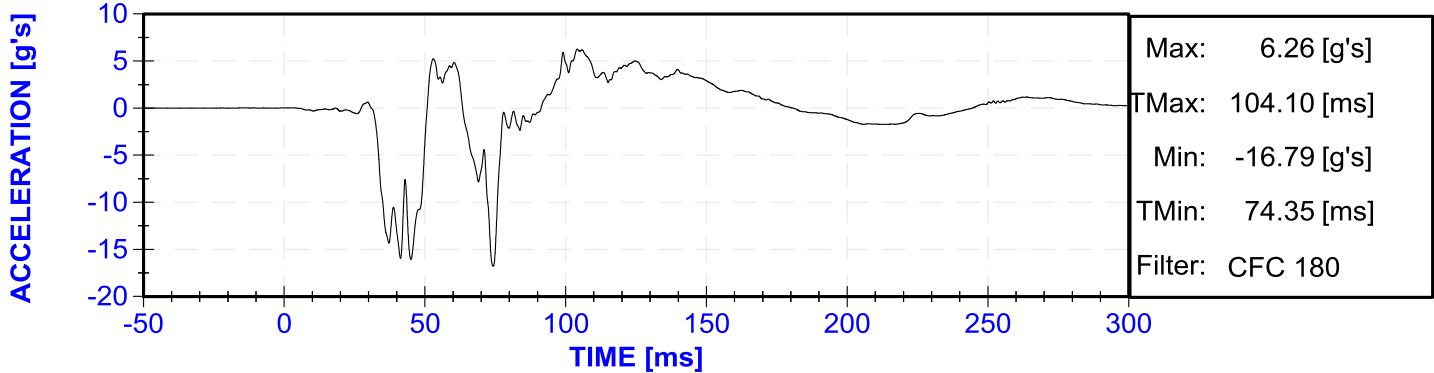


Passenger Lower Spine T12 Acceleration (Y) vs. Time

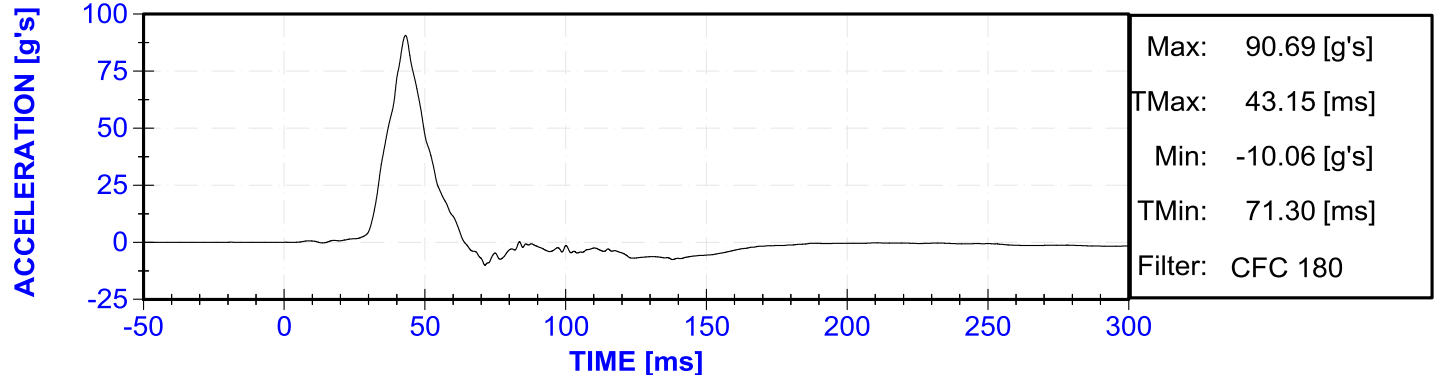


Passenger Lower Spine T12 Acceleration (Z) vs. Time

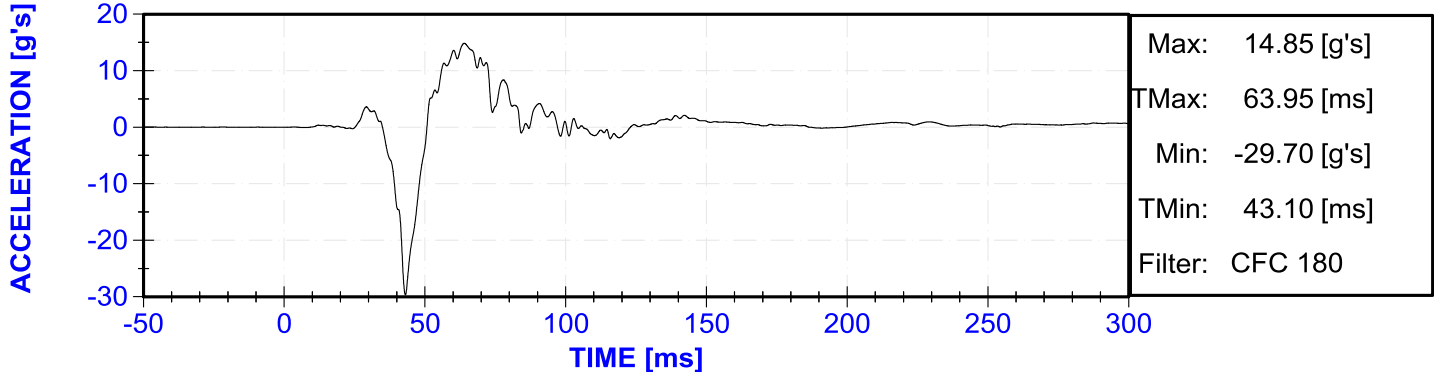


Passenger Lower Spine T12 Resultant Acceleration vs. Time

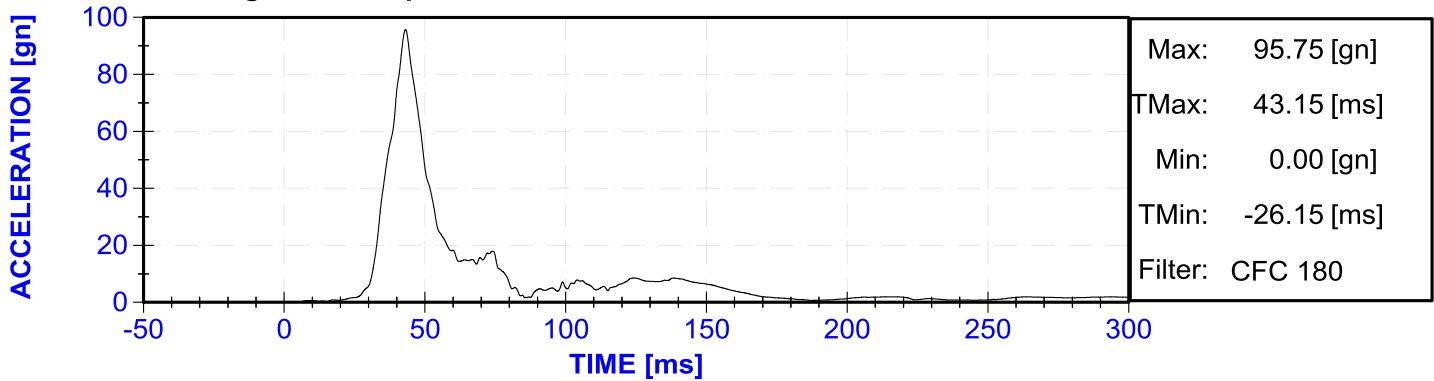


Passenger Iliac Force on Impact Side (Y) vs. Time

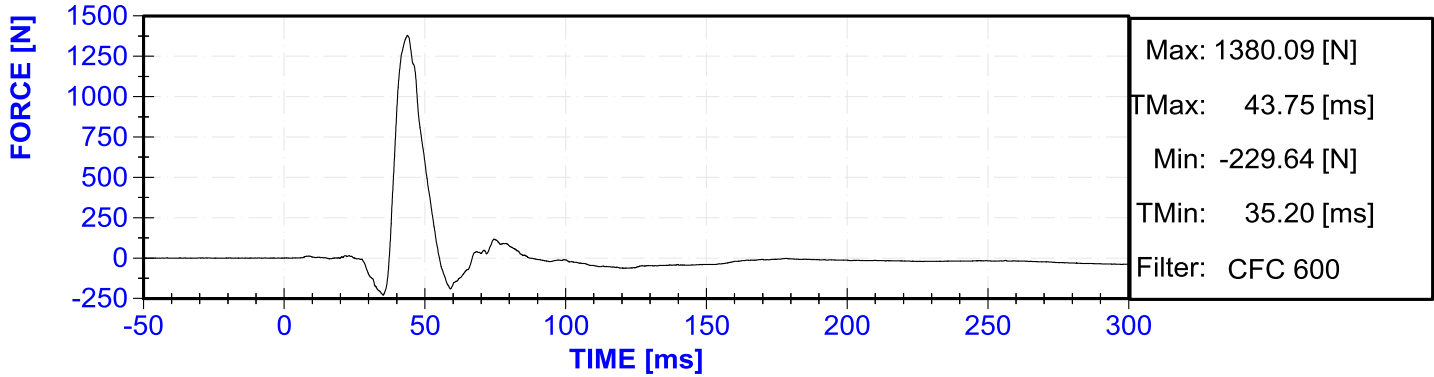

Passenger Acetabulum Force on Impact Side (Y) vs. Time

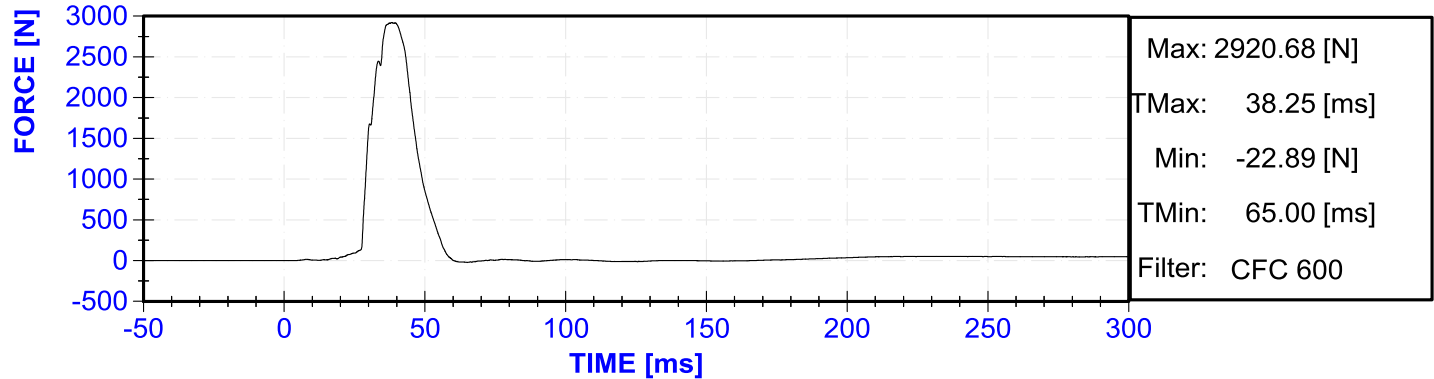

Passenger Total Pelvic Force on Impact Side (Y) vs. Time

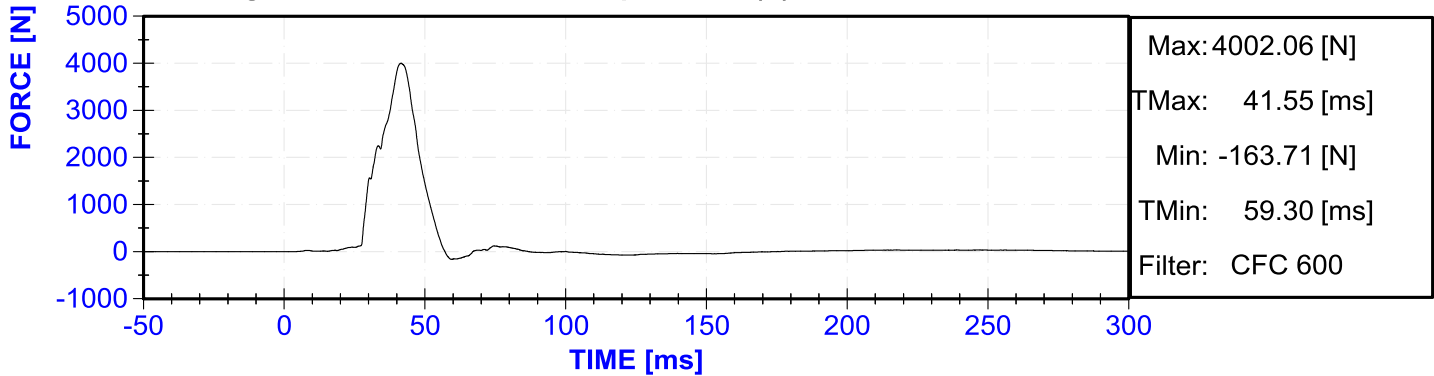

APPENDIX C

DUMMY PERFORMANCE CALIBRATION TEST DATA

CALIBRATION TEST RESULTS

PRE-TEST

EUROSID 2 (ES-2RE) MALE – DRIVER ATD

SERIAL NO: F034

(CONFIGURED FOR LEFT SIDE IMPACT)




External Measurements - EuroSID-2re


Technician: M. Geesey

Date: 10/23/2015

Dummy Serial Number: F034

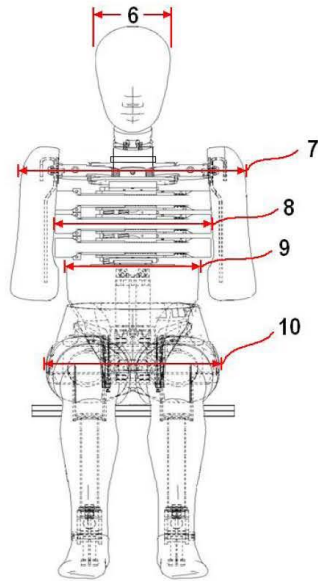

FRONT VIEW

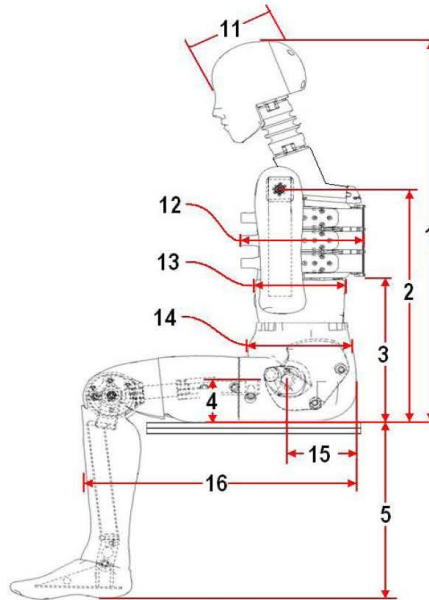

SIDE VIEW

Dim. No.	Description	Specification (mm)		Result (mm)	Pass/Fail
1	Sitting Height	900	918	910	Pass
2	Seat to Shoulder Joint	558	572	560	Pass
3	Seat to Lower Face of Thoracic Spine Box	346	356	348	Pass
4	Seat to Hip Joint (center of bolt)	97	103	100	Pass
5	Sole to Seat, Sitting	333	451	415	Pass
6	Head Width	152	158	153	Pass
7	Shoulder/Arm Width	461	479	477	Pass
8	Thorax Width	322	332	329	Pass
9	Abdomen Width	273	287	283	Pass
10	Pelvis Lap Width	359	373	368	Pass
11	Head Depth	196	206	201	Pass
12	Thorax Depth	262	272	268	Pass
13	Abdomen Depth	194	204	199	Pass
14	Pelvis Depth	235	245	239	Pass
15	Back of Buttocks to Hip Joint (center of bolt)	150	160	154	Pass
16	Back of Buttocks to Front Knee	597	615	602	Pass


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	F034	Laboratory Supervisor	M. Goehle




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22	Pass
Humidity	10	70	%	42.8	Pass
Resultant Acceleration	125	155	g's	131.2	Pass
Oscillation	0	15	%	4.06	Pass
Fore-Aft Acceleration	-15	15	g's	9.8	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P58904	10/19/2015	4/18/2016
Y Accelerometer	ENDEVCO 7264CT	AC-P58911	10/19/2015	4/18/2016
Z Accelerometer	ENDEVCO 7264CT	AC-P58776	10/19/2015	4/18/2016

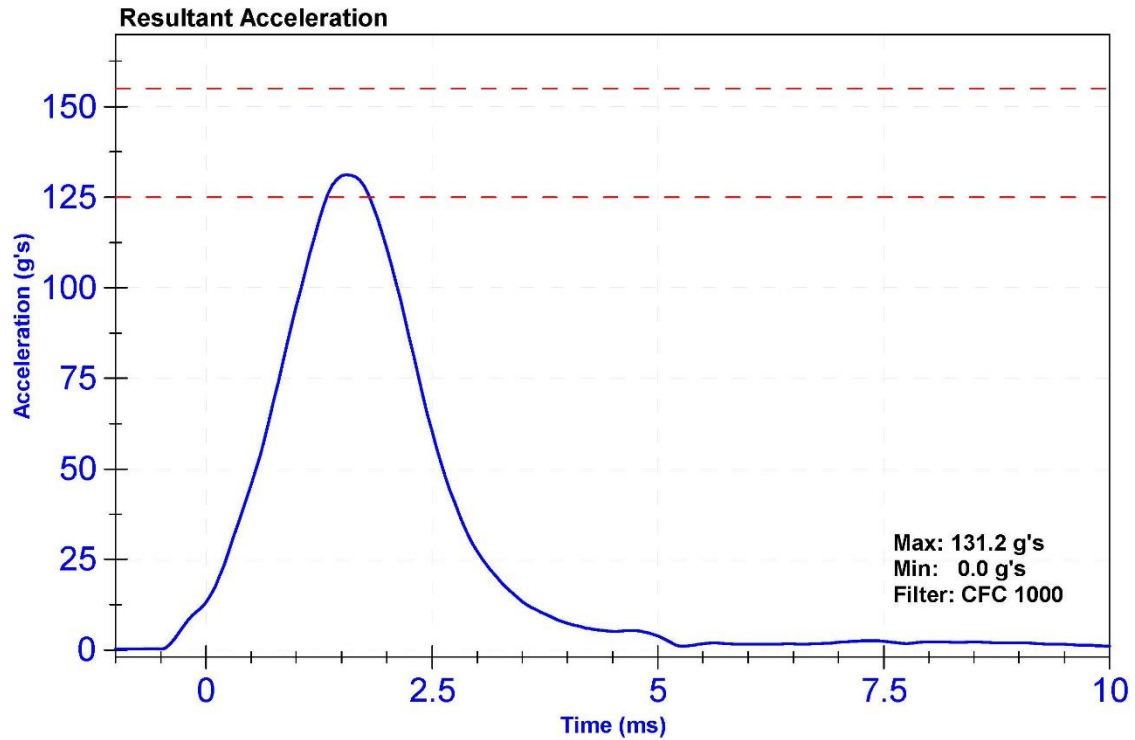

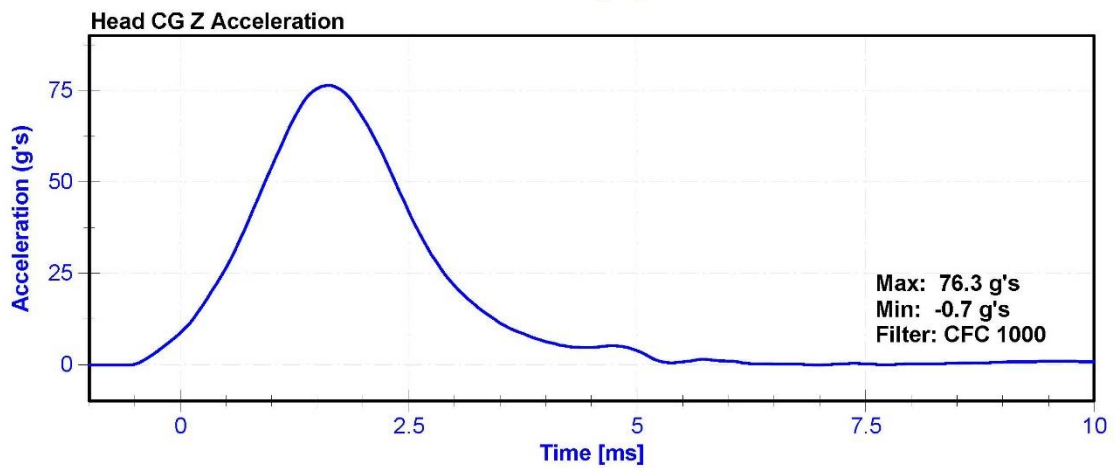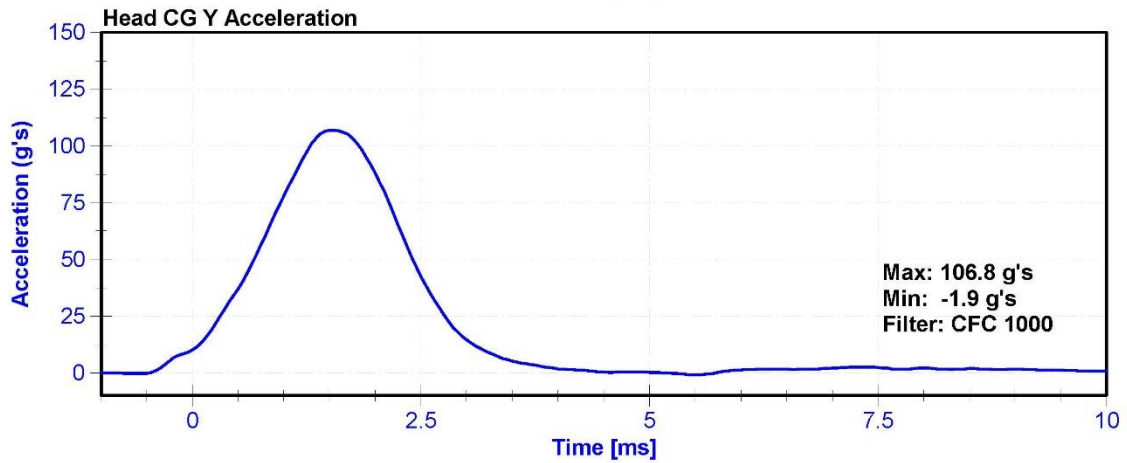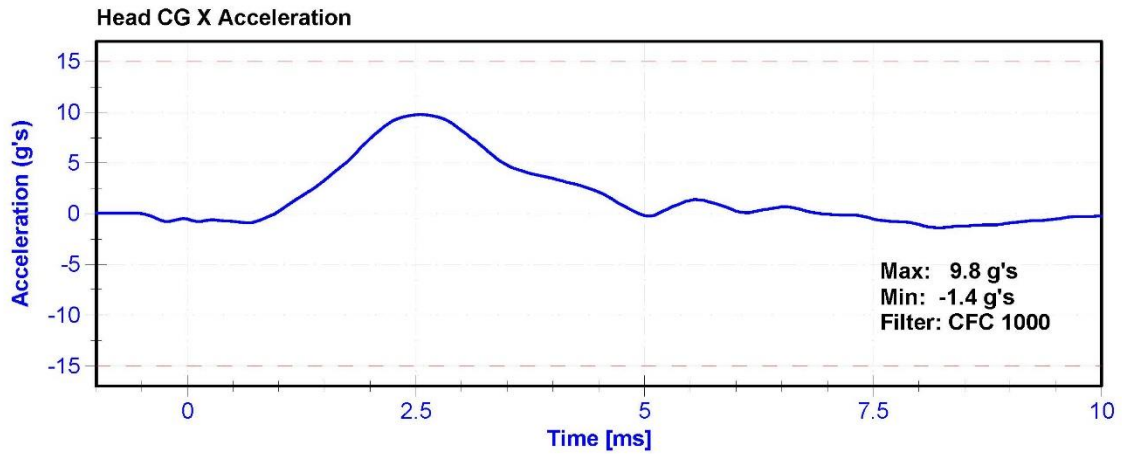


ATD Manufacturer	FTSS	Test Technician	R. Weil
ATD Serial Number	FO34	Laboratory Supervisor	M. Goehle




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.6	Pass
Humidity	10	70	%	31.5	Pass
Velocity	3.3	3.5	m/s	3.46	Pass
Lateral Neck Rotation	49	59	deg	55.1	Pass
Time at Maximum Rotation	54	66	ms	58.8	Pass
Time of Rotation Decay from Maximum	53	88	ms	58.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5F3	5/7/2015	11/7/2015
Front Pendulum Potentiometer	SP22G	DS-094	9/24/2015	9/23/2016
Headform Potentiometer	SP22G	DS-095	9/24/2015	9/23/2016

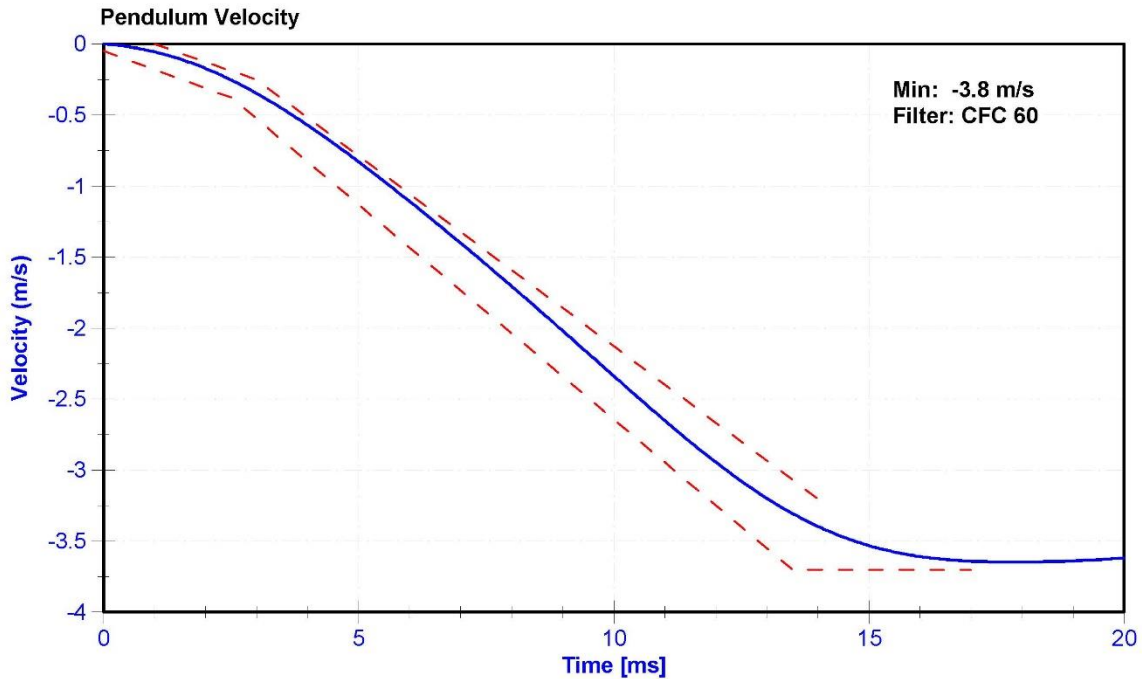

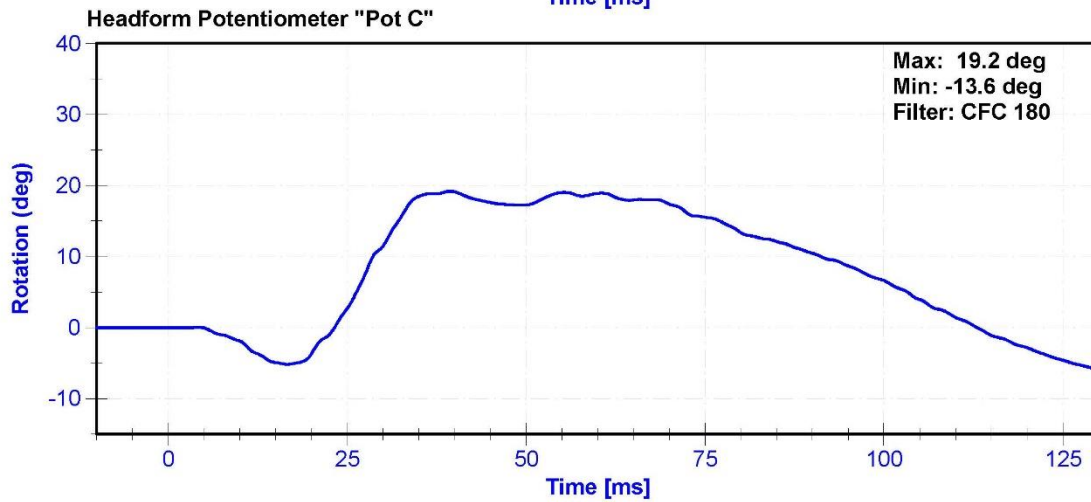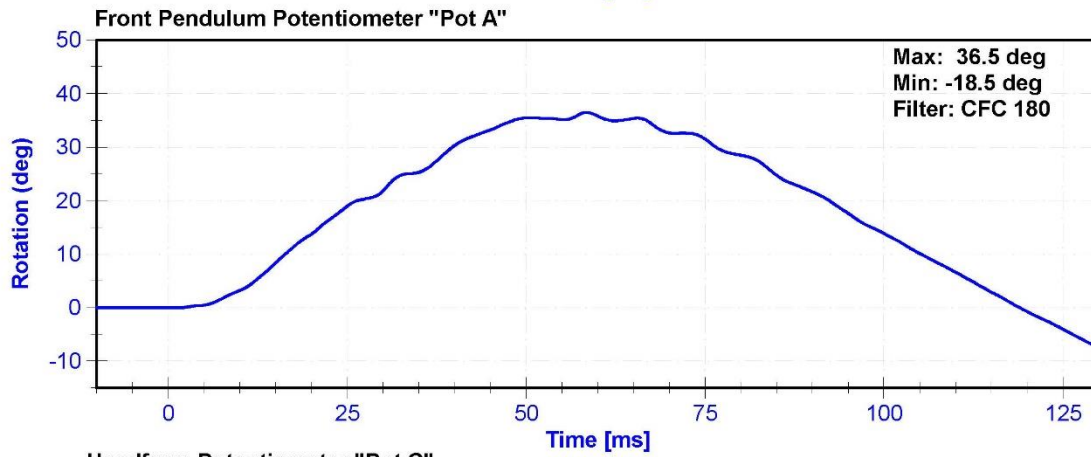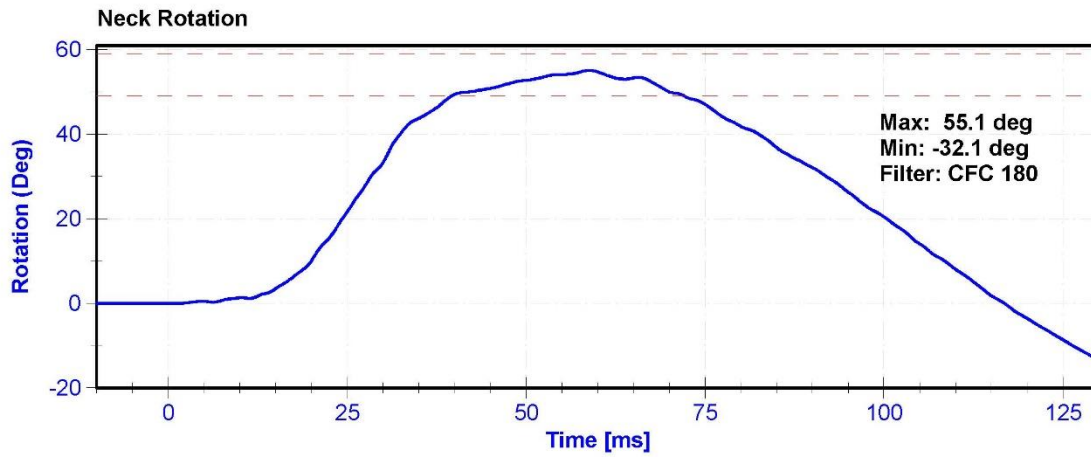


ATD Manufacturer	FTSS	Test Technician	R. Weil
ATD Serial Number	FO34	Laboratory Supervisor	M. Goehle

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.7	Pass
Humidity	10	70	%	48.2	Pass
Velocity	4.2	4.4	m/s	4.24	Pass
Probe Acceleration	7.5	10.5	g's	10.23	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	ENDEVCO 7231CT	AC-C14972	8/13/2015	2/11/2016

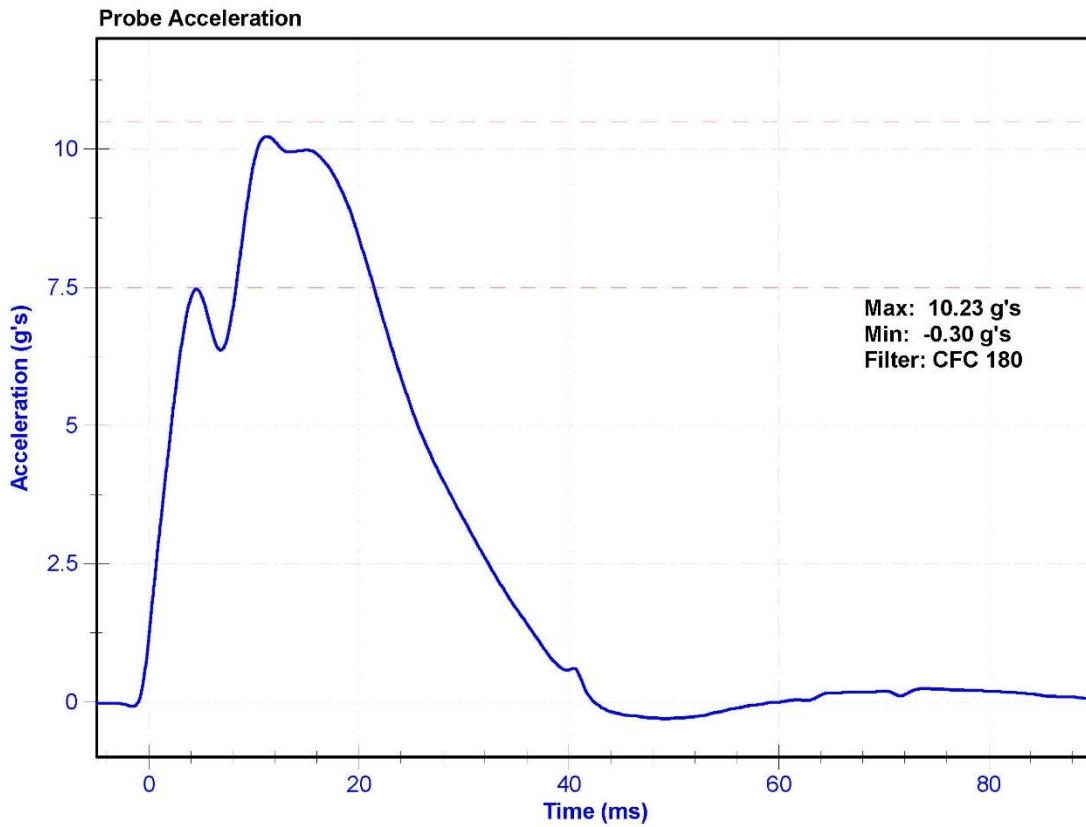


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.6	Pass
Humidity	10	70	%	43.3	Pass
Rib Displacement	36	40	mm	36.2	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-183GFE	10/19/2015	10/18/2016

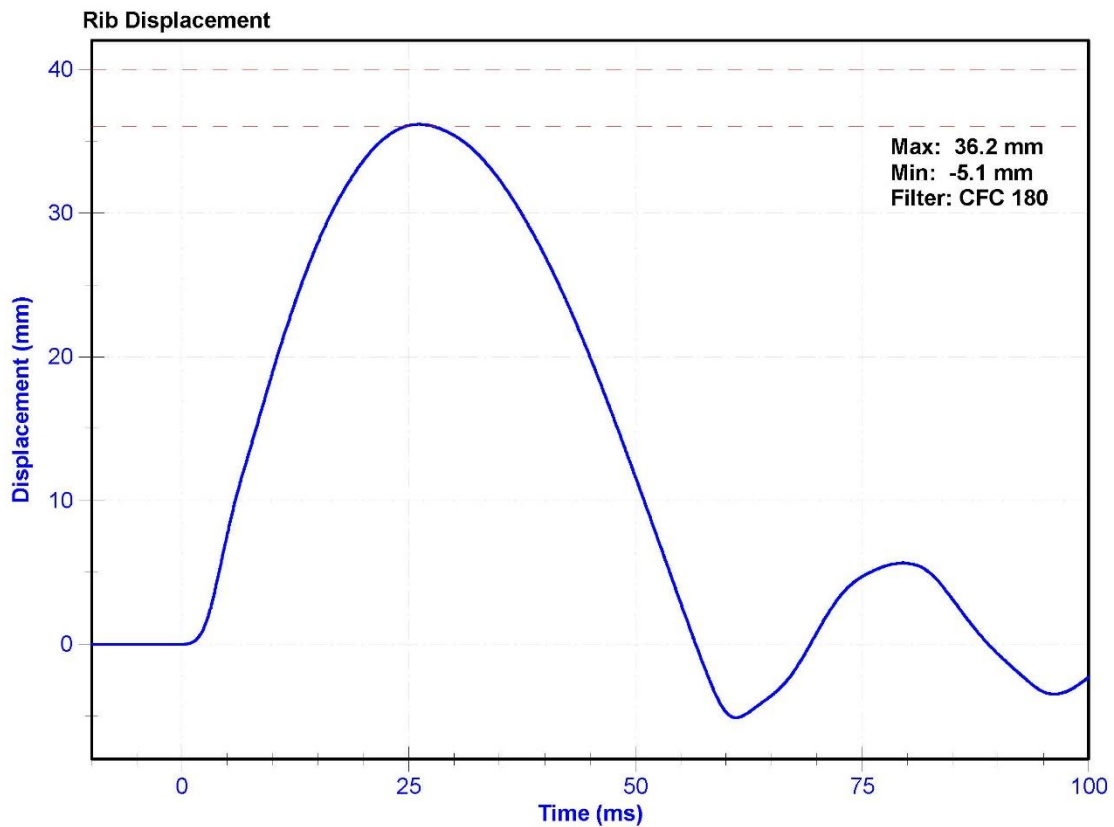


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.6	Pass
Humidity	10	70	%	43.3	Pass
Rib Displacement	46	51	mm	46.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-183GFE	10/19/2015	10/18/2016

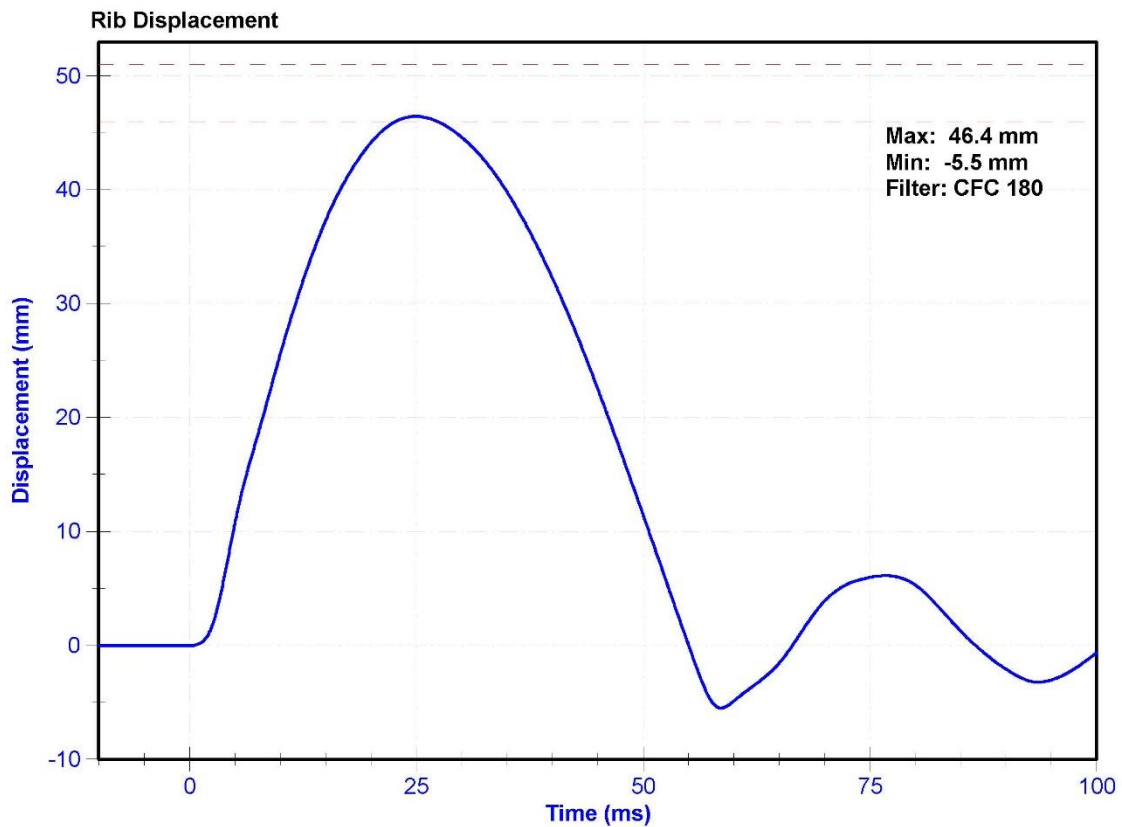


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.6	Pass
Humidity	10	70	%	43.3	Pass
Rib Displacement	36	40	mm	36.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-184GFE	10/19/2015	10/18/2016

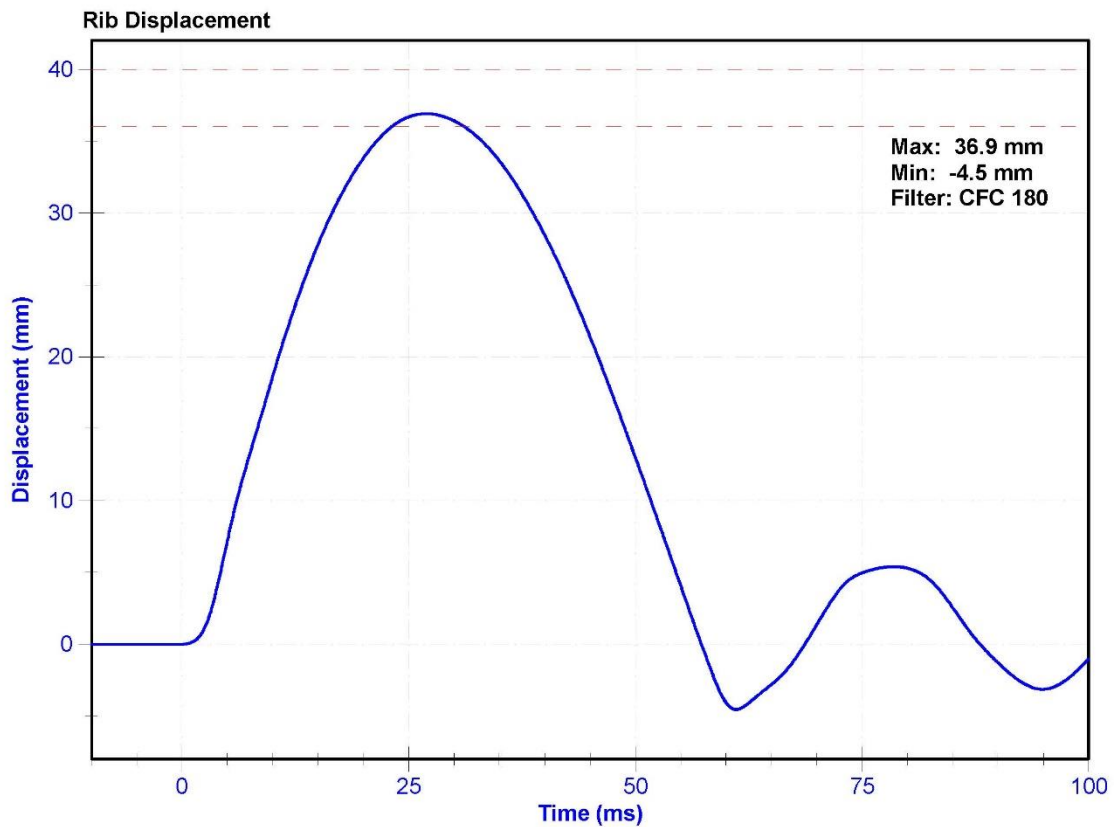


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.6	Pass
Humidity	10	70	%	43.3	Pass
Rib Displacement	46	51	mm	47.5	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-184GFE	10/19/2015	10/18/2016

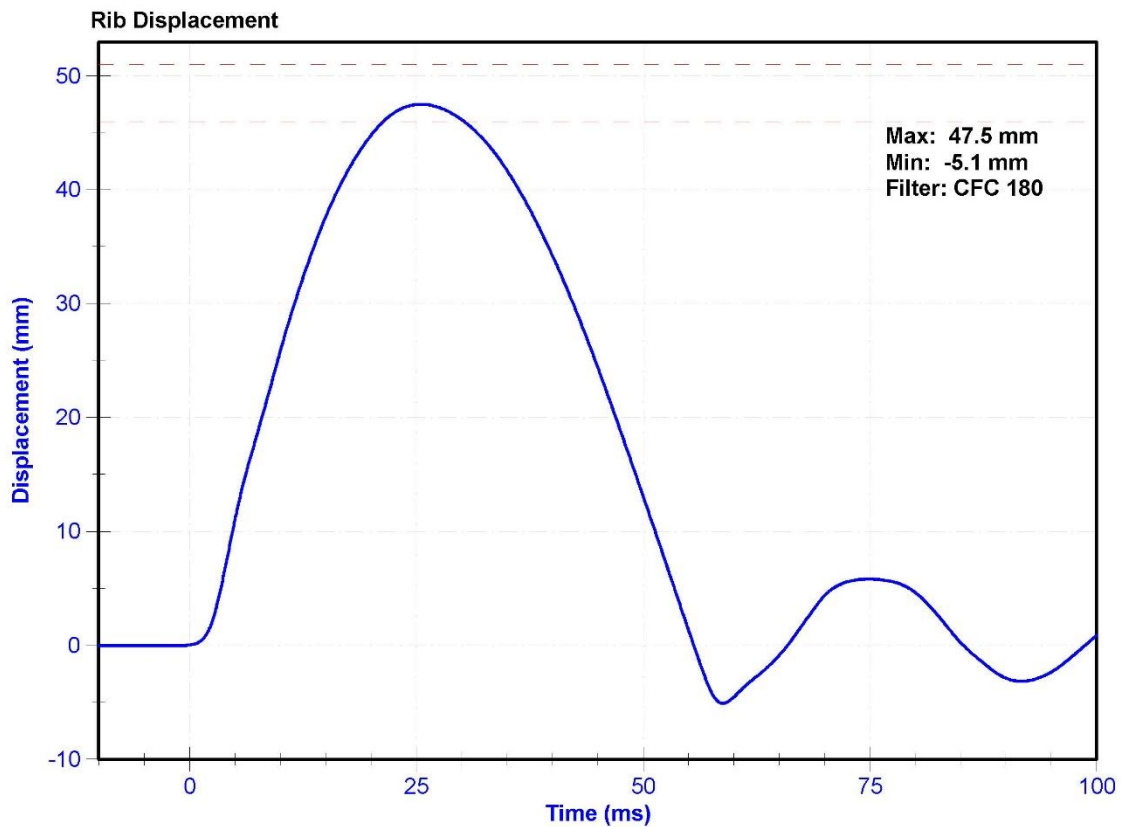


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.0	Pass
Humidity	10	70	%	42.3	Pass
Rib Displacement	36	40	mm	37.6	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-182GFE	10/19/2015	10/18/2016

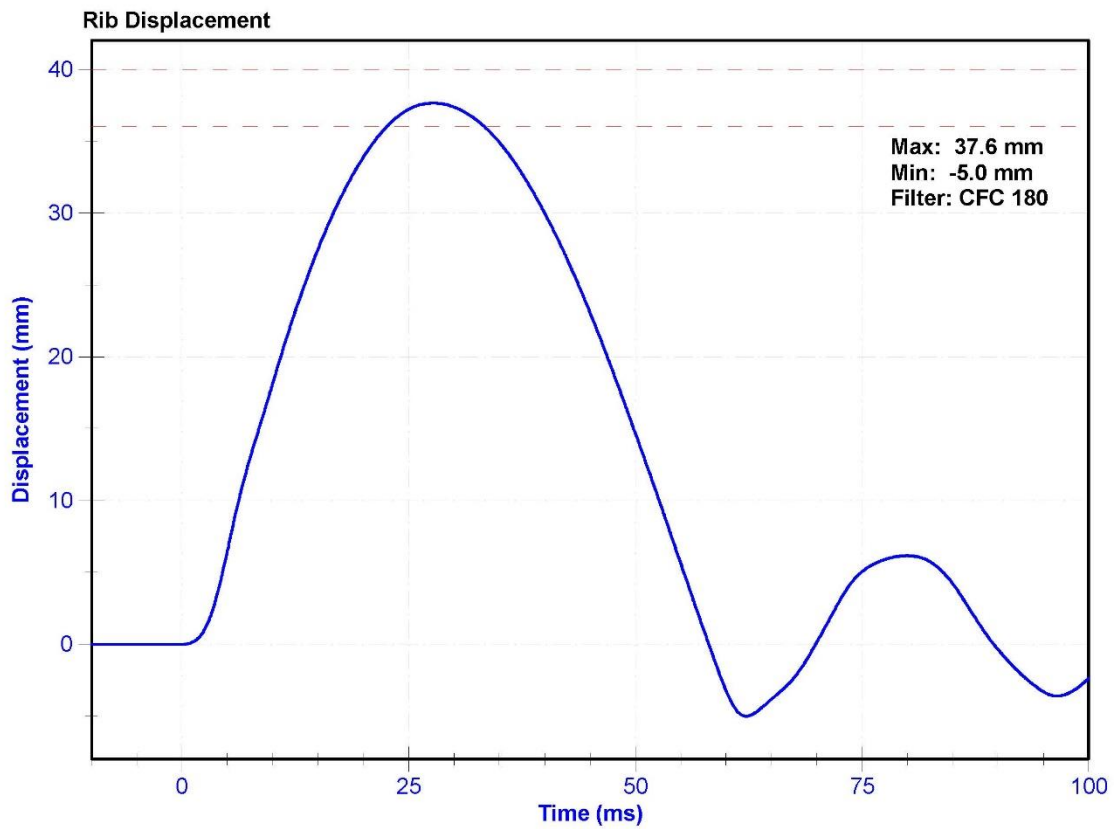


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.0	Pass
Humidity	10	70	%	42.3	Pass
Rib Displacement	46	51	mm	48.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-182GFE	10/19/2015	10/18/2016

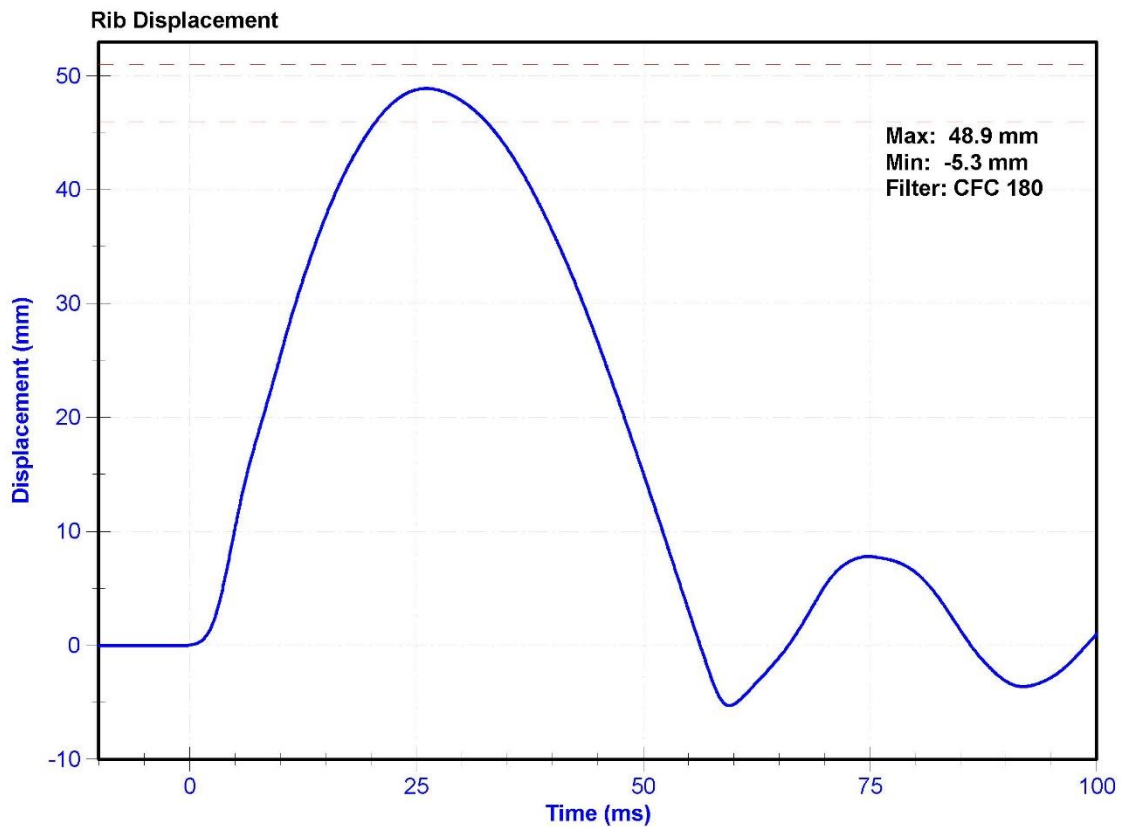


ATD Manufacturer	FTSS	Test Technician	R. Weil
ATD Serial Number	FO34	Laboratory Supervisor	M. Goehle





Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.1	Pass
Humidity	10	70	%	48.0	Pass
Velocity	5.4	5.6	m/s	5.50	Pass
Resistive Force after 6ms	5,100	6,200	N	6101.4	Pass
Upper Thorax Rib Deflection	34	41	mm	37.0	Pass
Mid Thorax Rib Deflection	37	45	mm	41.7	Pass
Lower Thorax Rib Deflection	37	44	mm	41.3	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	ENDEVCO 7231CT	AC-C14972	8/13/2015	2/11/2016
Upper Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-183GFE	10/19/2015	10/18/2016
Middle Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-184GFE	10/19/2015	10/18/2016
Lower Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-182GFE	10/19/2015	10/18/2016

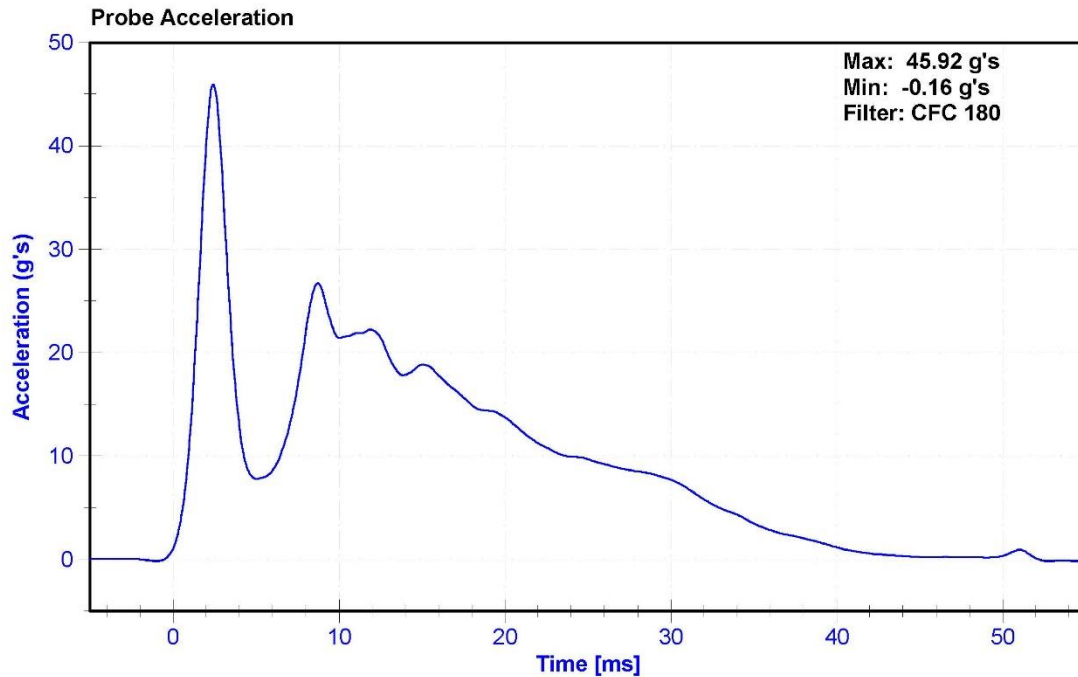

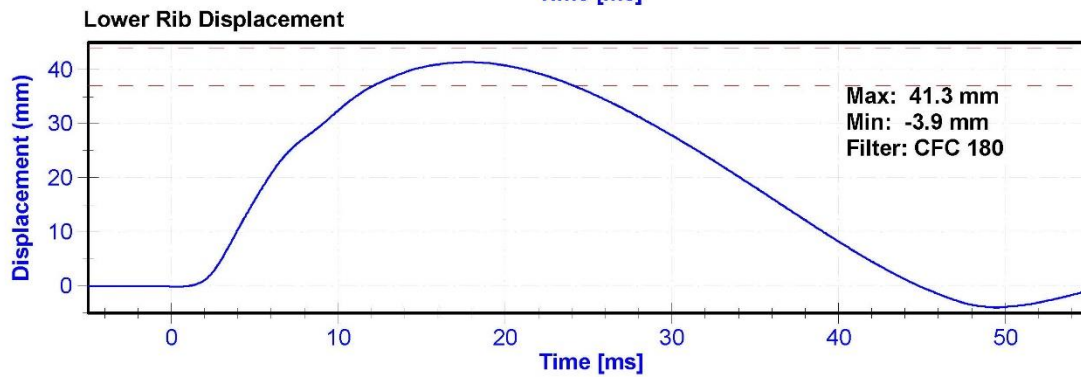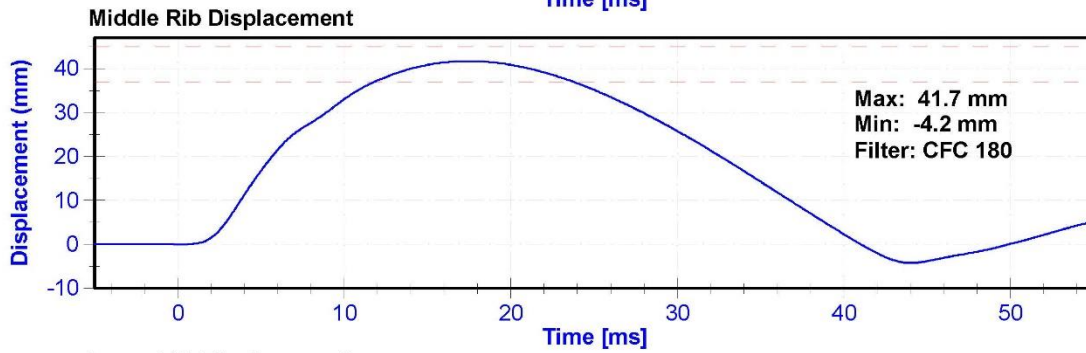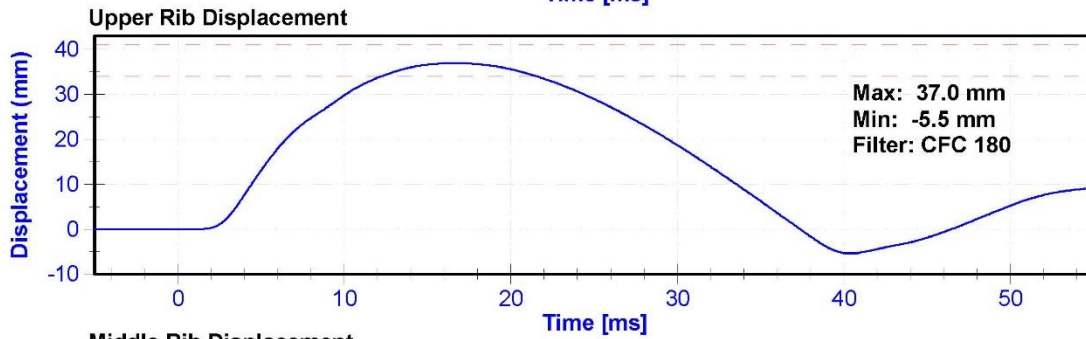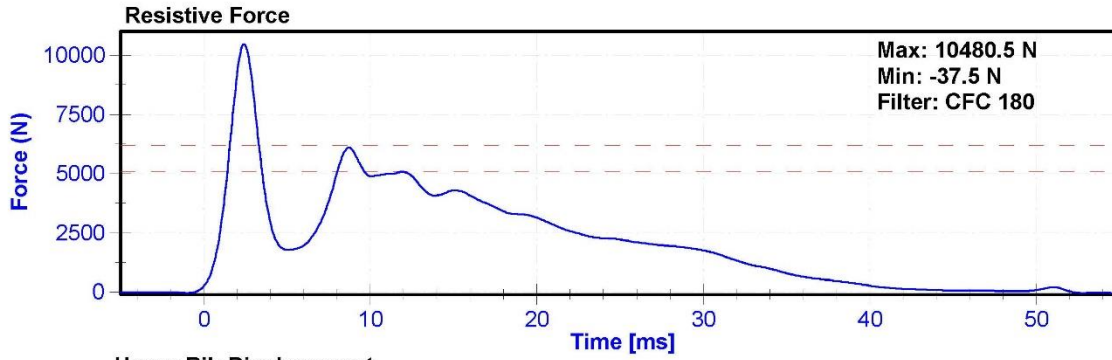


ATD Manufacturer	FTSS	Test Technician	R. Weil
ATD Serial Number	FO34	Laboratory Supervisor	M. Goehle

Results


Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.1	Pass
Humidity	10	70	%	46.3	Pass
Velocity	3.9	4.1	m/s	4.02	Pass
Combined Abdomen Force	2,200	2,700	N	2397.1	Pass
Time at Peak Abdomen Force	10.0	12.3	ms	10.50	Pass
Resistive Probe Force	4,000	4,800	N	4449.7	Pass
Time at Peak Resistive Force	10.6	13.0	ms	11.00	Pass

Transducer Calibrations


Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C14972	8/13/2015	2/11/2016
Front Abdomen Load Cell	DENTON 2631	LC-1512	6/25/2015	6/24/2016
Middle Abdomen Load Cell	DENTON 2631	LC-1526	6/25/2015	6/24/2016
Rear Abdomen Load Cell	DENTON 2631	LC-1512	6/25/2015	6/24/2016

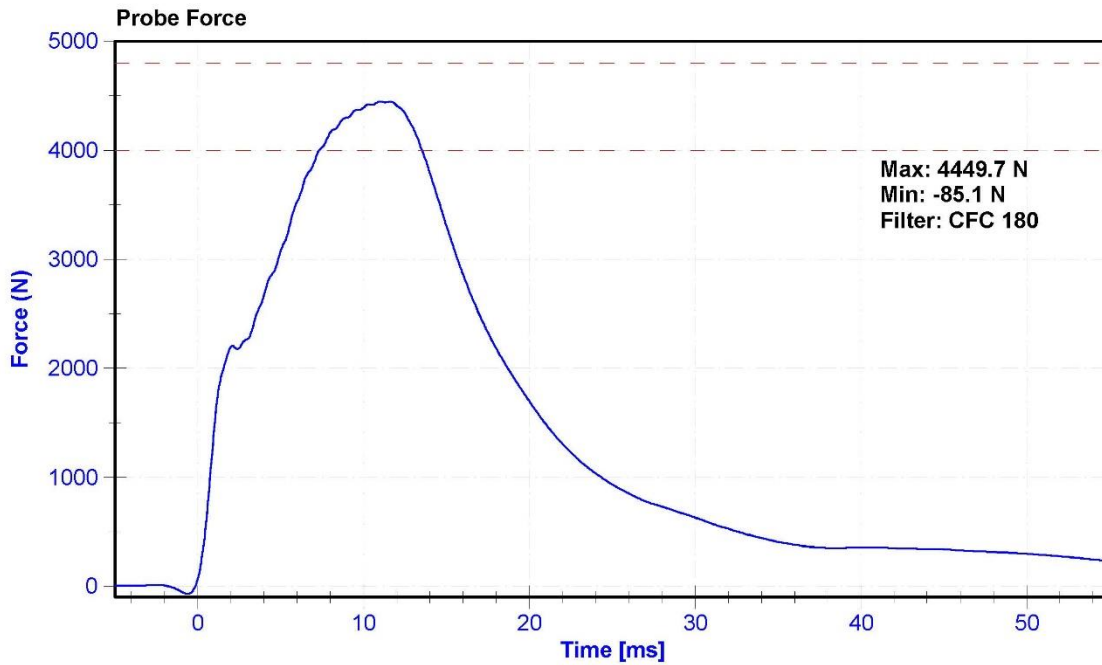


Combined Abdomen Force

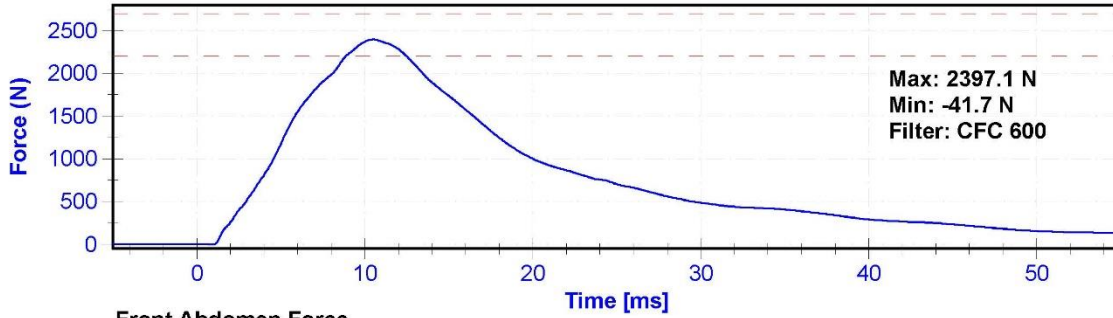


Front Abdomen Force

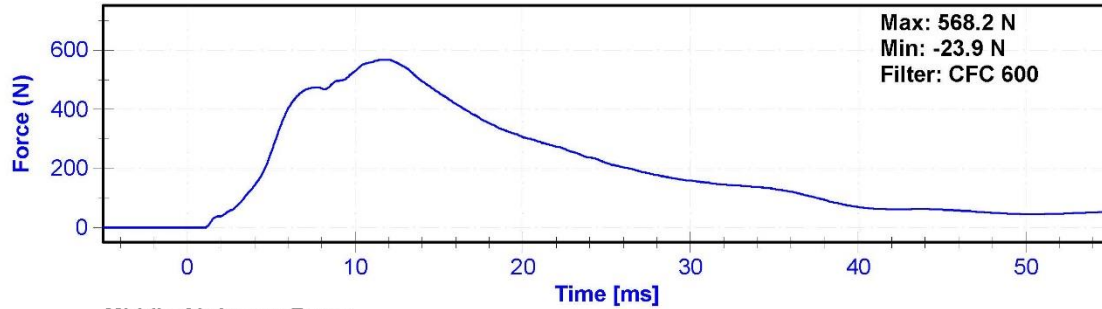

Middle Abdomen Force

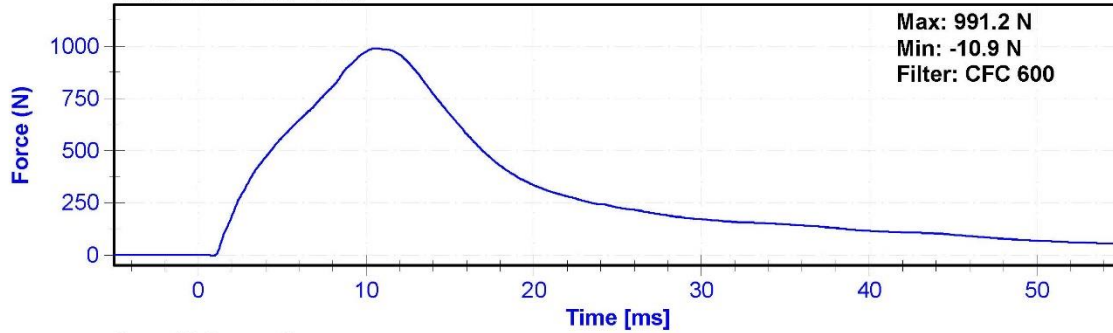

Rear Abdomen Force

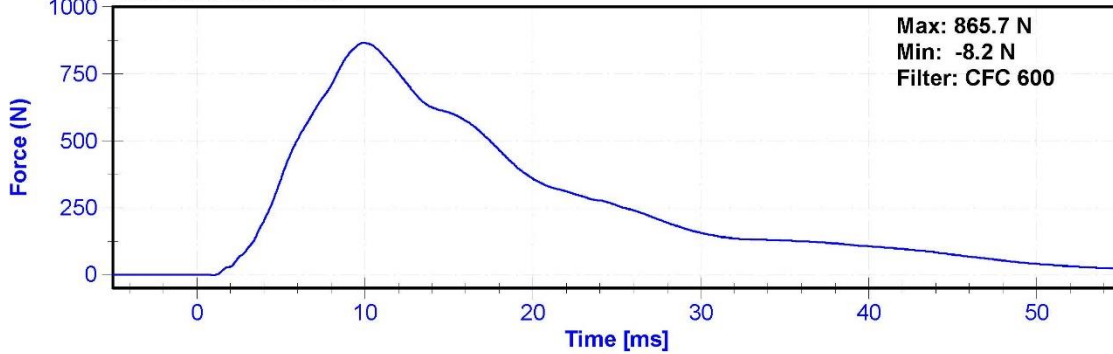



ATD Manufacturer	FTSS	Test Technician	M. Goehle
ATD Serial Number	F034	Laboratory Supervisor	M. Goehle



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.1	Pass
Humidity	10	70	%	28.2	Pass
Velocity	5.95	6.15	m/s	6.068	Pass
Lateral Spine Rotation	45	55	deg	47.6	Pass
Time at Maximum Rotation	39	53	ms	45.1	Pass
Time of Decay to Zero Degrees	37	57	ms	37.1	Pass
Pulse within Corridor?	-	-	-	Yes	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5F3	5/7/2015	11/7/2015
Pendulum "A" Potentiometer	SP22G	DS-094	9/24/2015	9/23/2016
Condyle "B" Potentiometer	SP22G	DS-095	9/24/2015	9/23/2016

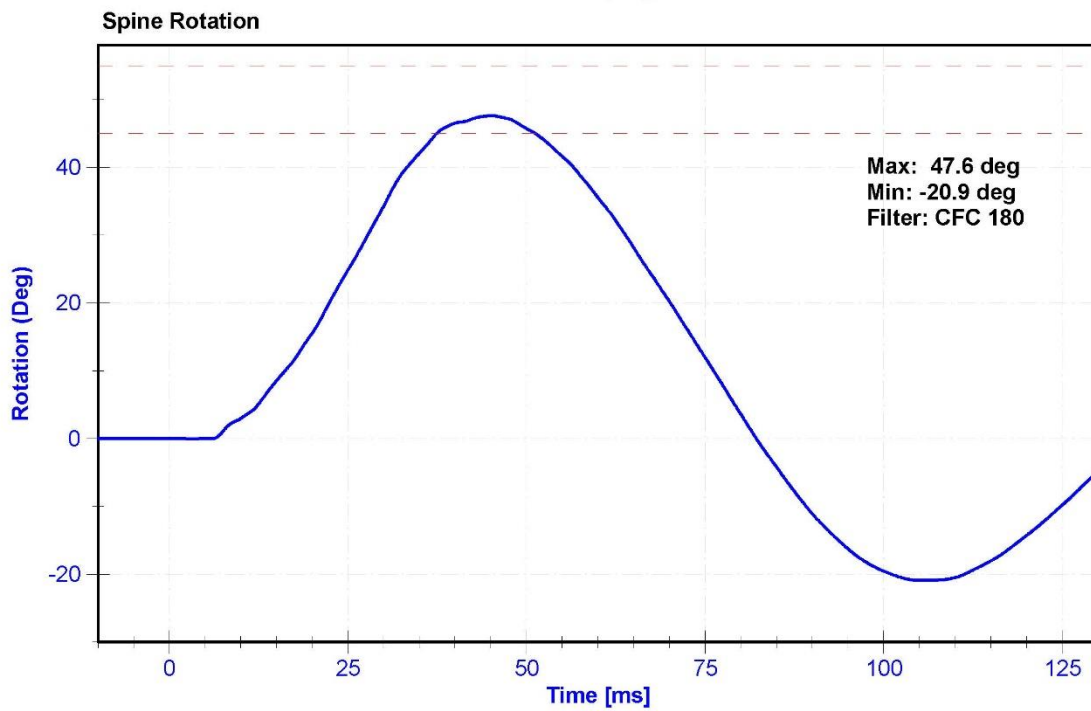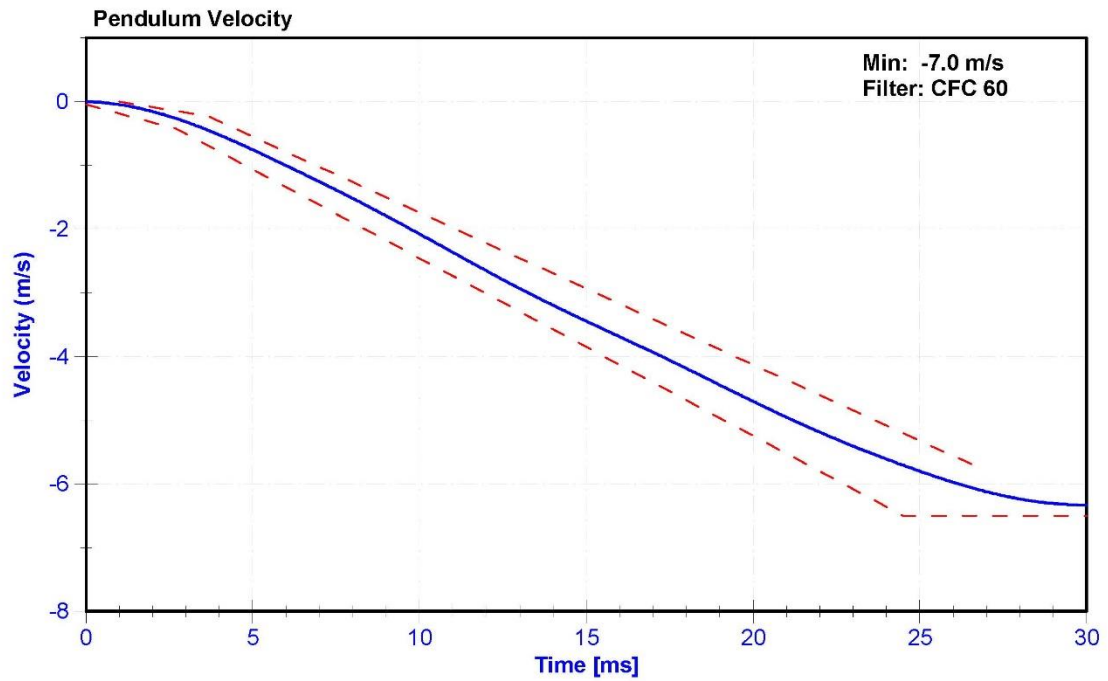

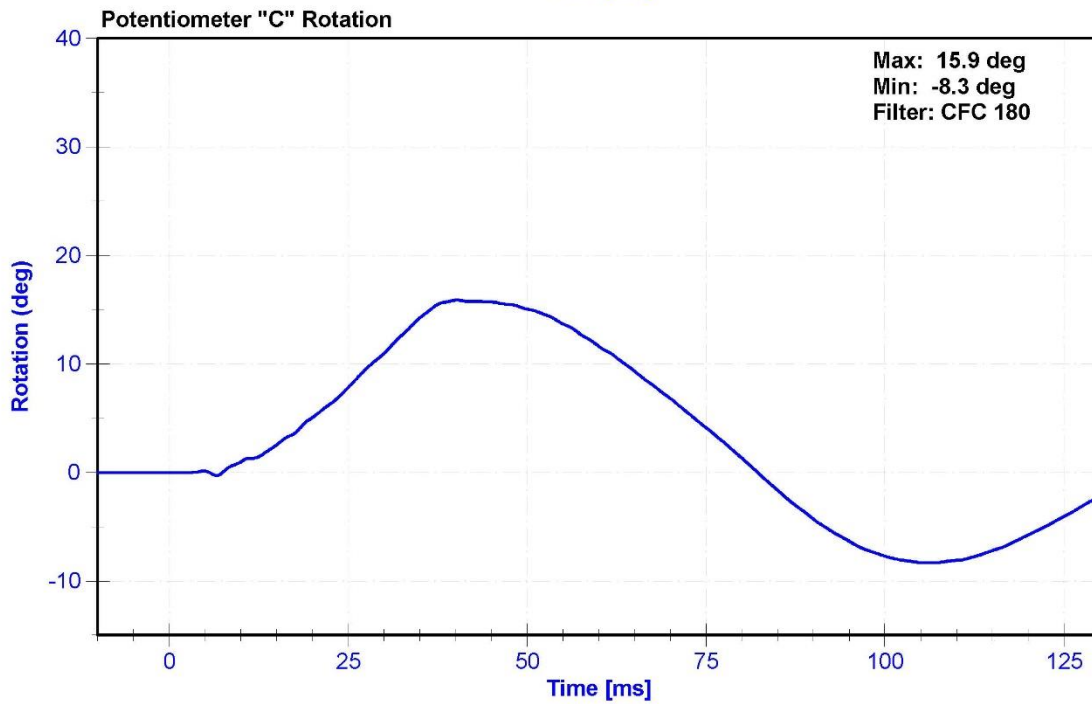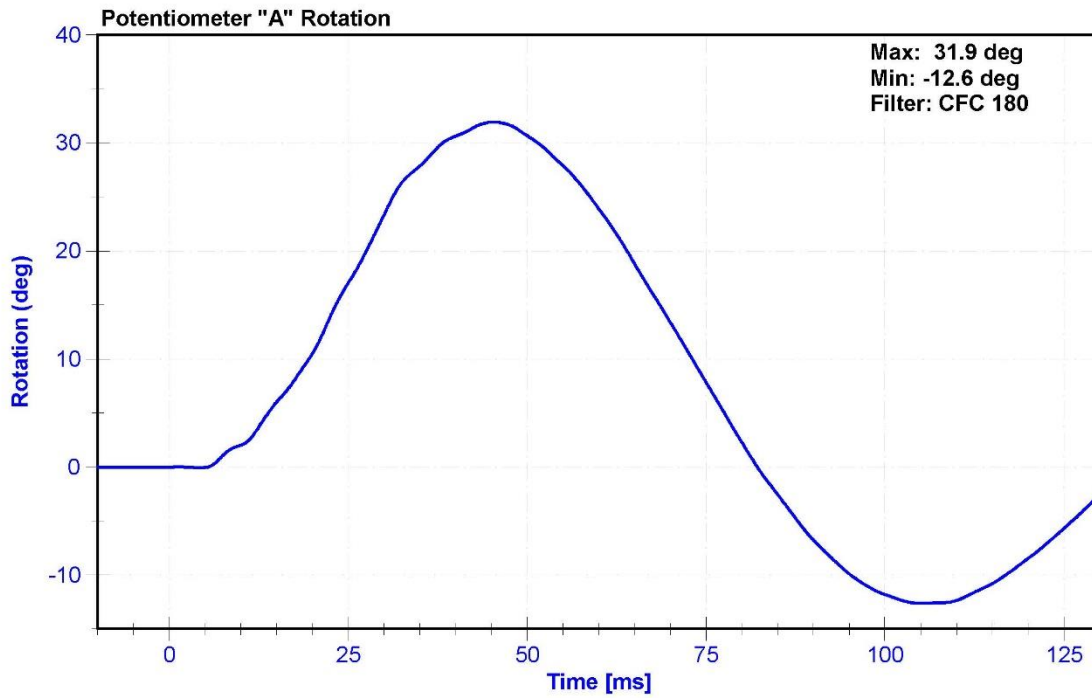


ATD Manufacturer	FTSS	Test Technician	R. Weil
ATD Serial Number	FO34	Laboratory Supervisor	M. Goehle



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	44.9	Pass
Velocity	4.2	4.4	m/s	4.35	Pass
Resistive Force	4,700	5,400	N	4992.1	Pass
Time at Peak Resistive Force	11.8	16.1	ms	13.15	Pass
Pubic Force	-1,590	-1,230	N	-1381.2	Pass
Time at Peak Pubic Force	12.2	17.0	ms	13.45	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C14972	8/13/2015	2/11/2016
Pubic Load Cell	Denton 3096JFL	LC-465Fy	6/25/2015	6/24/2016

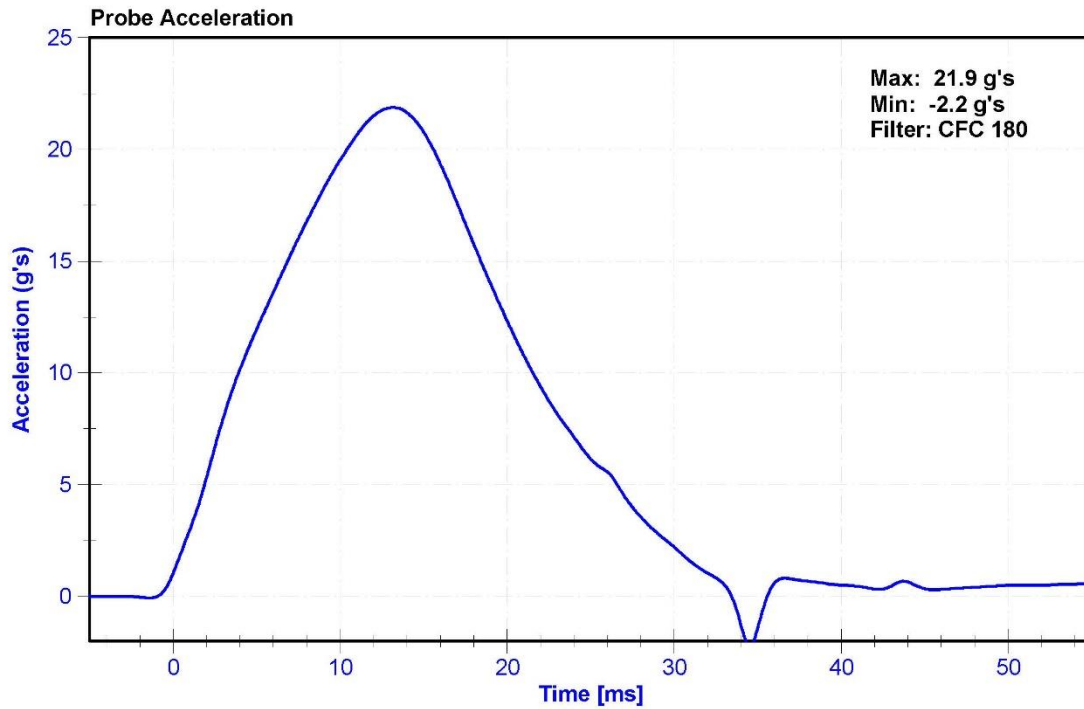

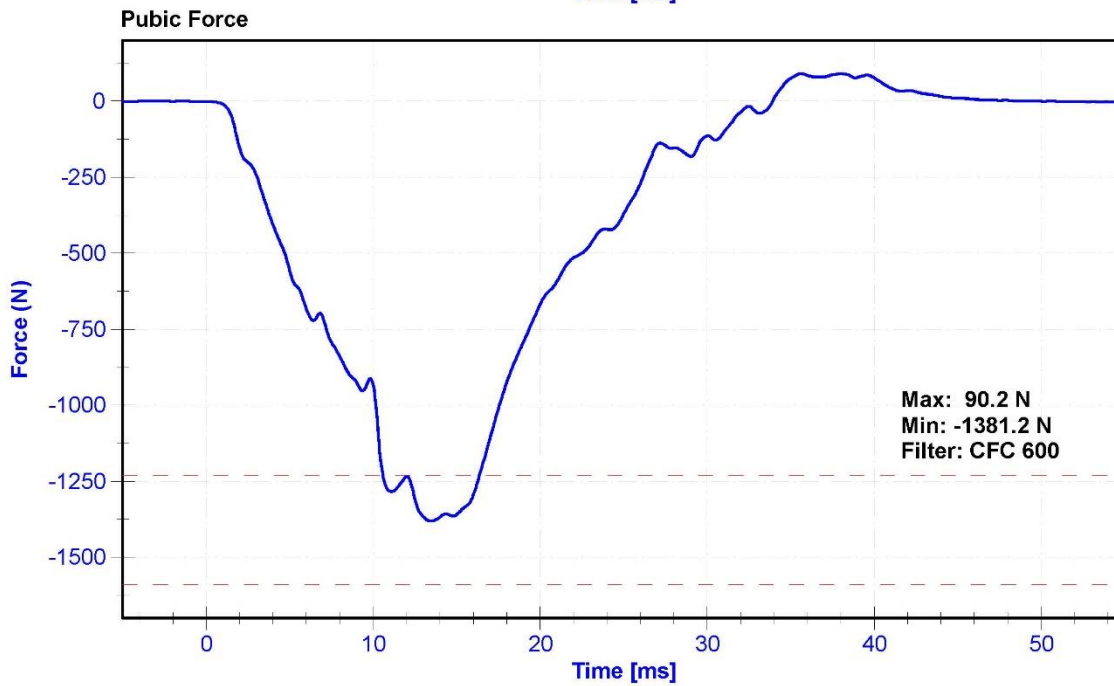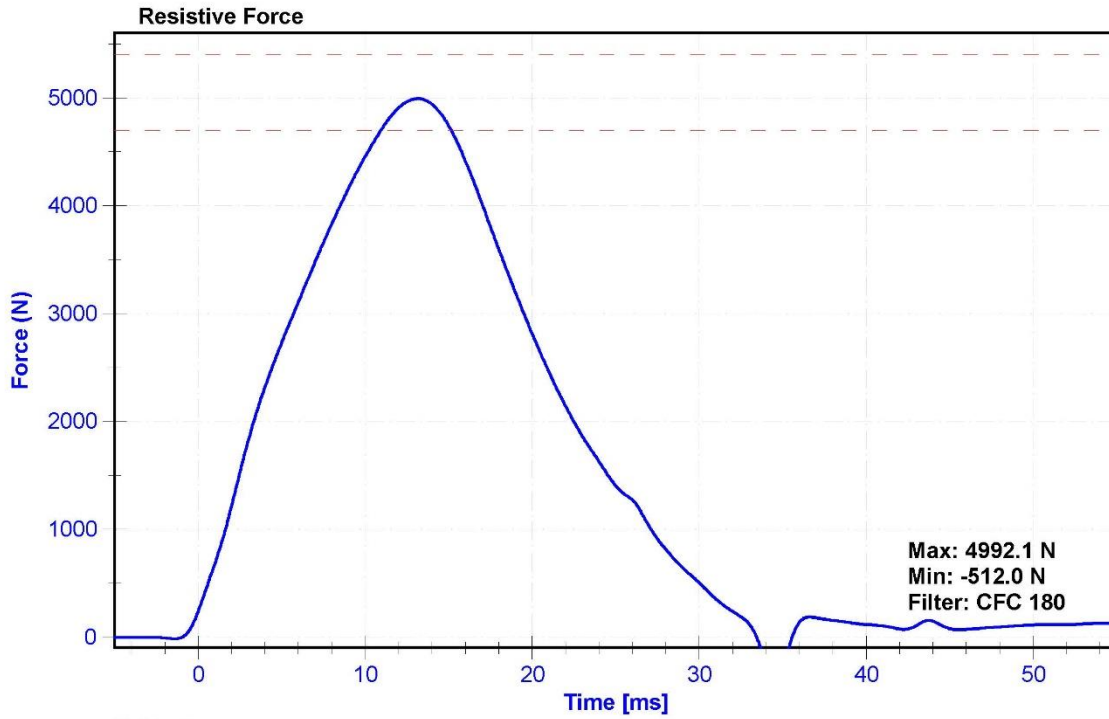

CALIBRATION TEST RESULTS

PRE-TEST

SID-IIS 5TH PERCENTILE FEMALE - PASSENGER ATD

SERIAL No: 303

(CONFIGURED FOR LEFT SIDE IMPACT)




External Measurements - SID-IIs

Technician: M. Geesey

Date: 10/22/2015

Dummy Serial Number: 303

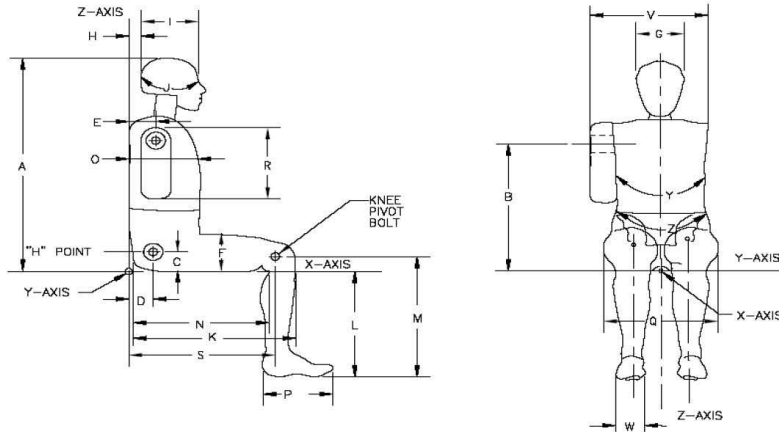

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	772	788	780	Pass
B	Shoulder Pivot Height	437	453	447	Pass
C	H-point Height	79	89	87	Pass
D	H-point from seatback	141	151	146	Pass
E	Shoulder Pivot from Backline	97	107	104	Pass
F	Thigh Clearance	119	135	129	Pass
G	Head Breadth	140	148	145	Pass
H	Head Back from Backline	40	46	43	Pass
I	Head Depth	178	188	181	Pass
J	Head Circumference	541	551	546	Pass
K	Buttock to Knee Length	514	540	531	Pass
L	Popliteal Height	343	369	357	Pass
M	Knee Pivot to floor height	392	409	404	Pass
N	Buttock Popliteal Length	416	442	438	Pass
O	Chest Depth w/o jacket	195	211	203	Pass
P	Foot Length	216	232	221	Pass
Q	Hip Breadth (w/pelvic plugs)	313	323	316	Pass
R	Arm Length	249	259	253	Pass
S	Knee Joint to seatback	477	493	486	Pass
V	Shoulder Width	341	357	351	Pass
W	Foot Width	78	94	85	Pass
Y	Chest Circumference w/jacket	851	881	870	Pass
Z	Waist Circumference	761	791	770	Pass


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	303	Laboratory Supervisor	M. Goehle




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.5	Pass
Humidity	10	70	%	36.4	Pass
Resultant Acceleration	115	137	g's	128.2	Pass
Oscillation	0	15	%	2.1	Pass
Fore-Aft Acceleration	-15	15	g's	2.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264	AC-P83420	10/16/2015	4/15/2016
Y Accelerometer	ENDEVCO 7264	AC-P52040	10/14/2015	4/13/2016
Z Accelerometer	ENDEVCO 7264CT	AC-P58737	10/14/2015	4/13/2016

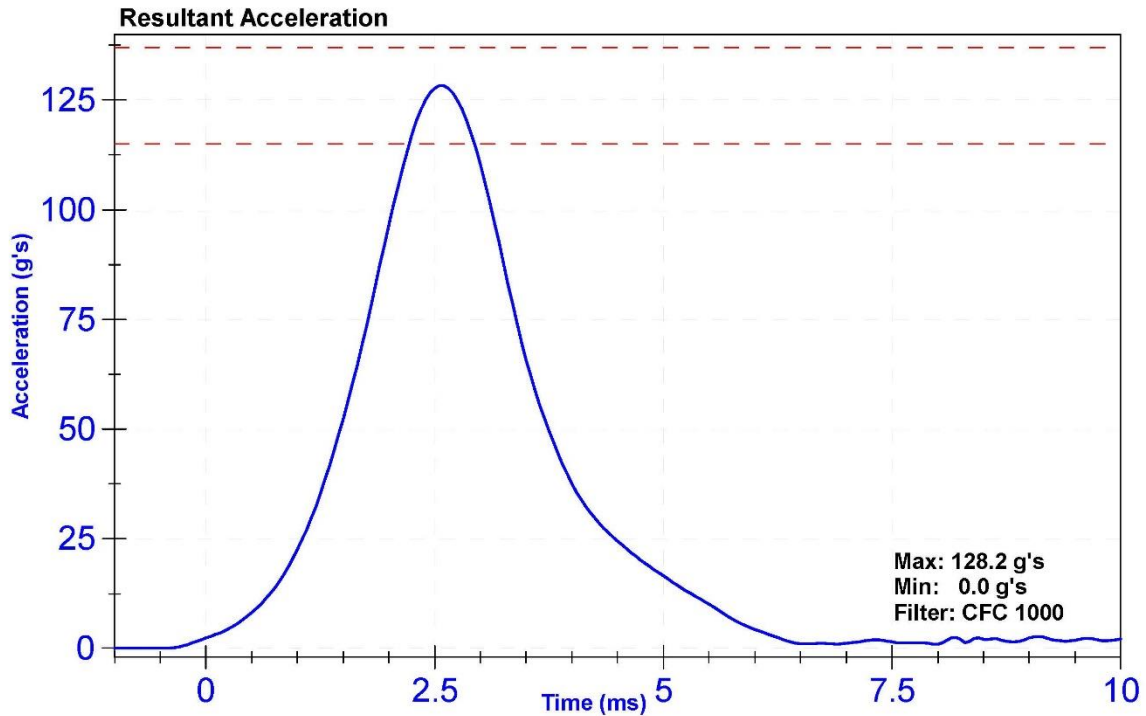

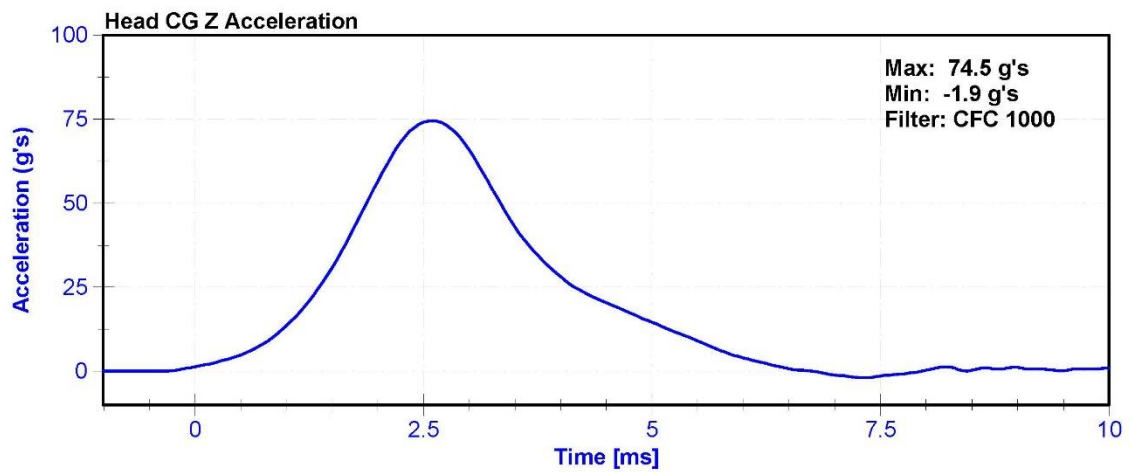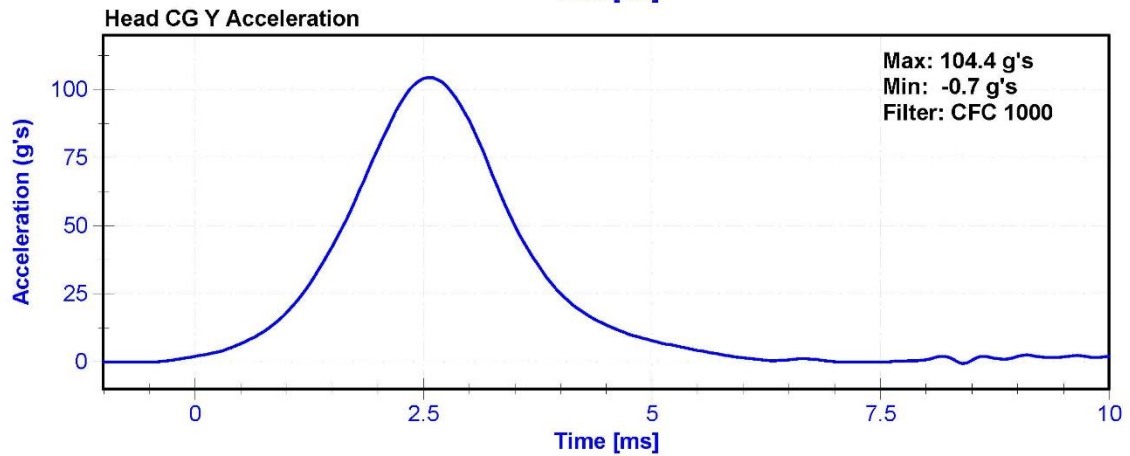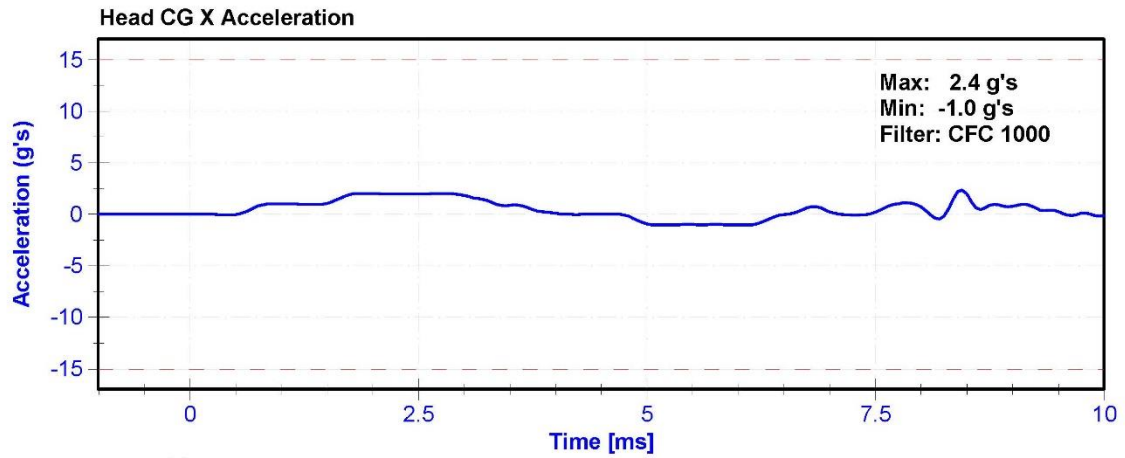


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	303	Laboratory Supervisor	M. Goehle



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22	Pass
Humidity	10	70	%	36.4	Pass
Velocity	5.51	5.63	m/s	5.583	Pass
Pendulum Impulse at 10ms	2.2	2.8	m/s	2.32	Pass
Pendulum Impulse at 15ms	3.3	4.1	m/s	3.44	Pass
Pendulum Impulse at 20ms	4.4	5.4	m/s	4.66	Pass
Pendulum Impulse at 25ms	5.4	6.1	m/s	5.59	Pass
Pendulum Impulse from 25 to 100ms	5.5	6.2	m/s	5.84	Pass
Neck Rotation	71	81	deg	77.3	Pass
Time at Maximum Rotation	50	70	ms	61.1	Pass
Moment about the OC	36	44	Nm	42.2	Pass
Moment Decay to 0 Nm	102	126	ms	116.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5F3	5/7/2015	11/7/2015
Pendulum Potentiometer	Denton 78051-342	DS-184Pend	9/24/2015	9/23/2016
Condyle Potentiometer	Denton 78051-342	DS-185Pend	9/25/2015	9/24/2016
Upper Neck Load Cell	Denton 1716A	LC-2019Fy	6/29/2015	6/28/2016

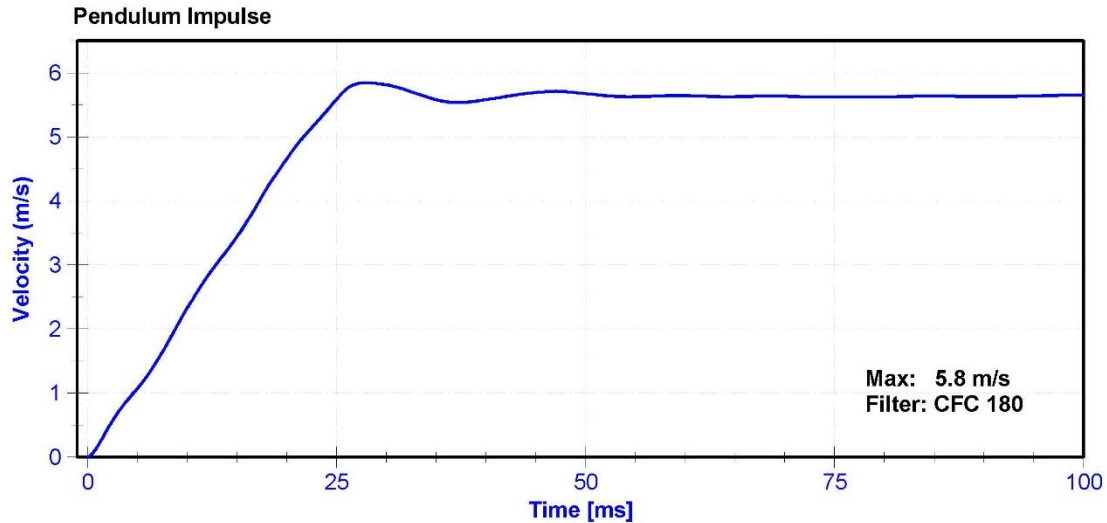

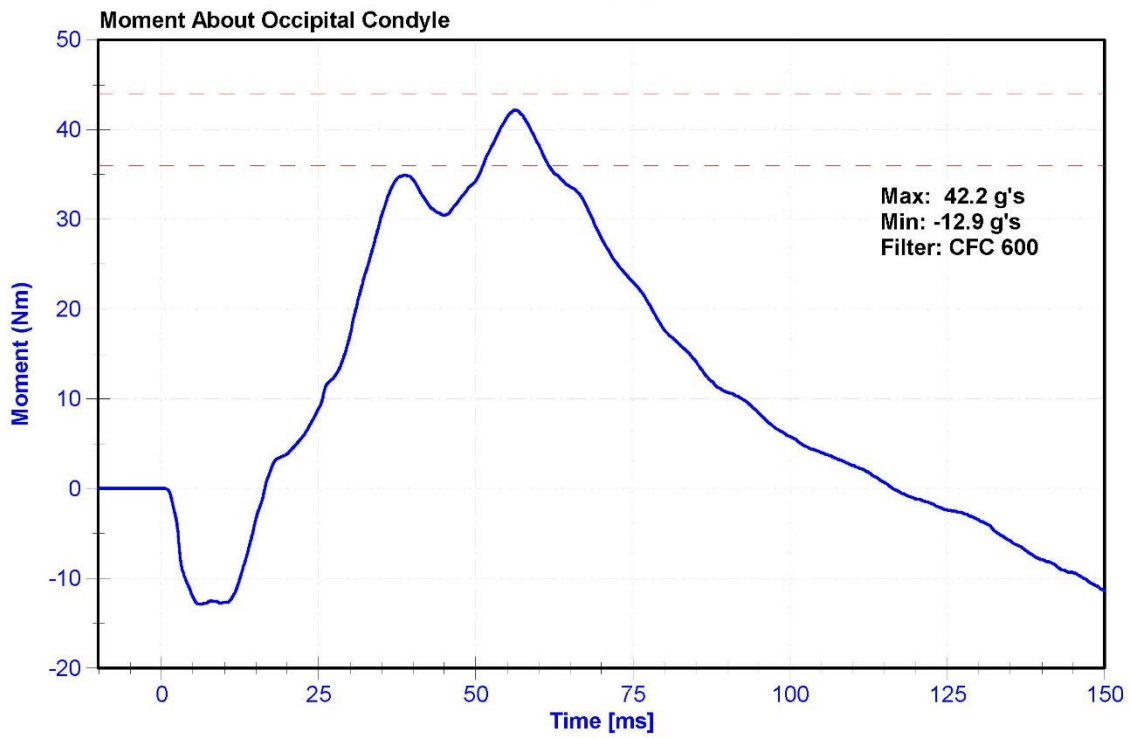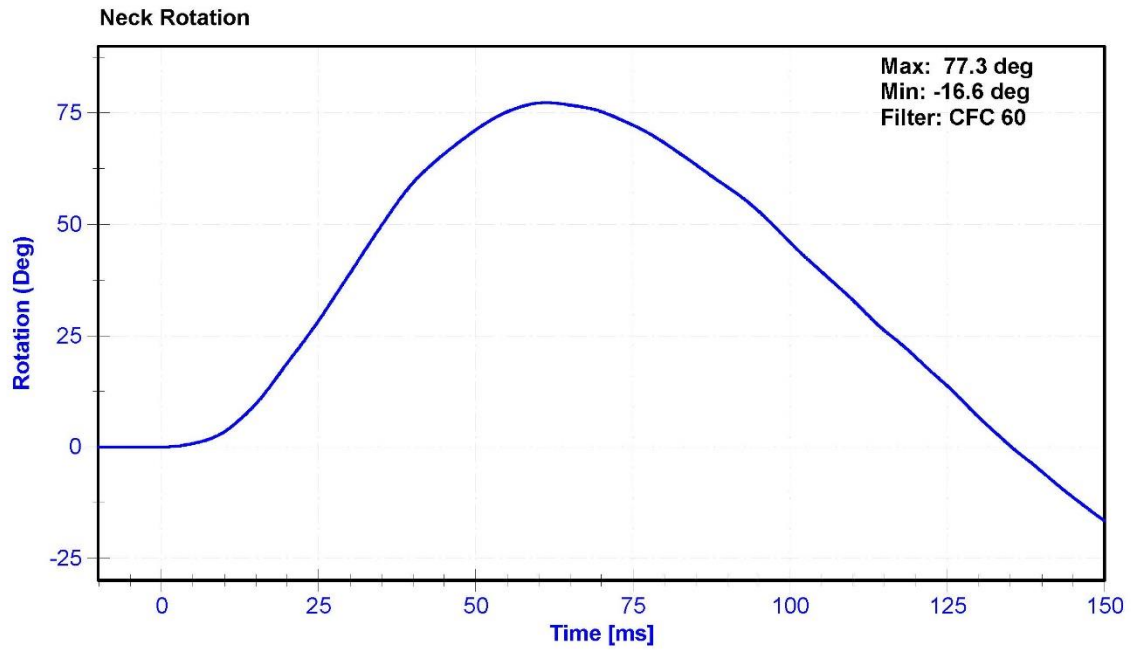


ATD Manufacturer	FTSS	Test Technician	R. Weil
ATD Serial Number	303	Laboratory Supervisor	M. Goehle



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.1	Pass
Humidity	10	70	%	45.8	Pass
Velocity	4.2	4.4	m/s	4.28	Pass
Probe Acceleration	13	18	g's	16.2	Pass
Shoulder Deflection	28	37	mm	30.0	Pass
Lateral Upper Spine Acceleration	17	22	g's	19.3	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C14972	8/13/2015	2/11/2016
Shoulder Potentiometer	Servo 08TC1-3725	DS-008GFE	10/19/2015	10/18/2016
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P63315	10/19/2015	4/18/2016

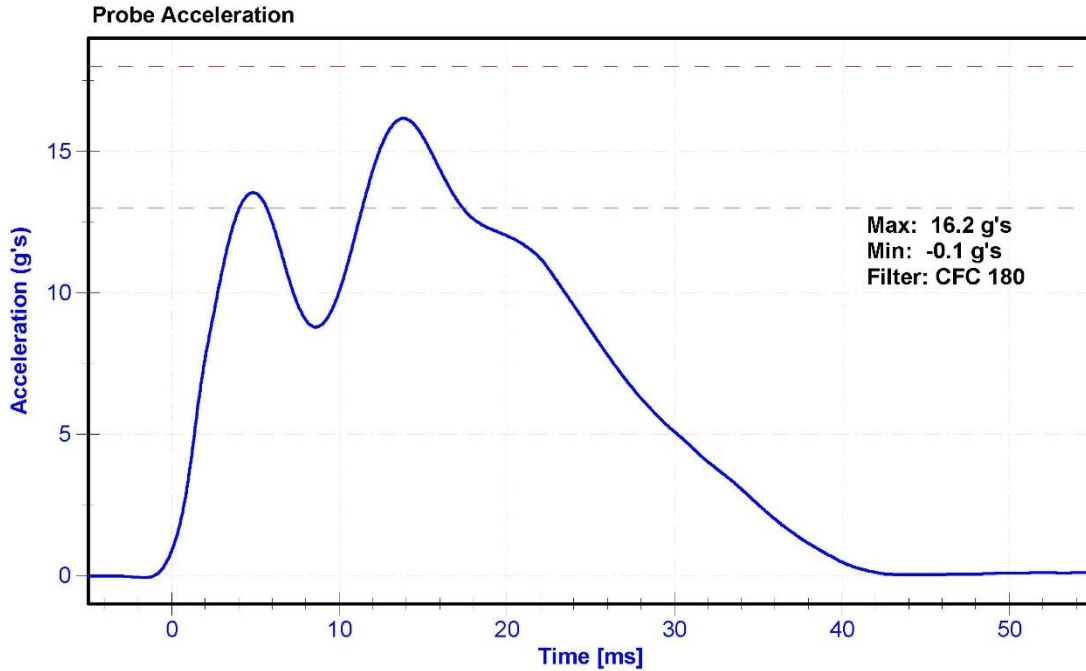

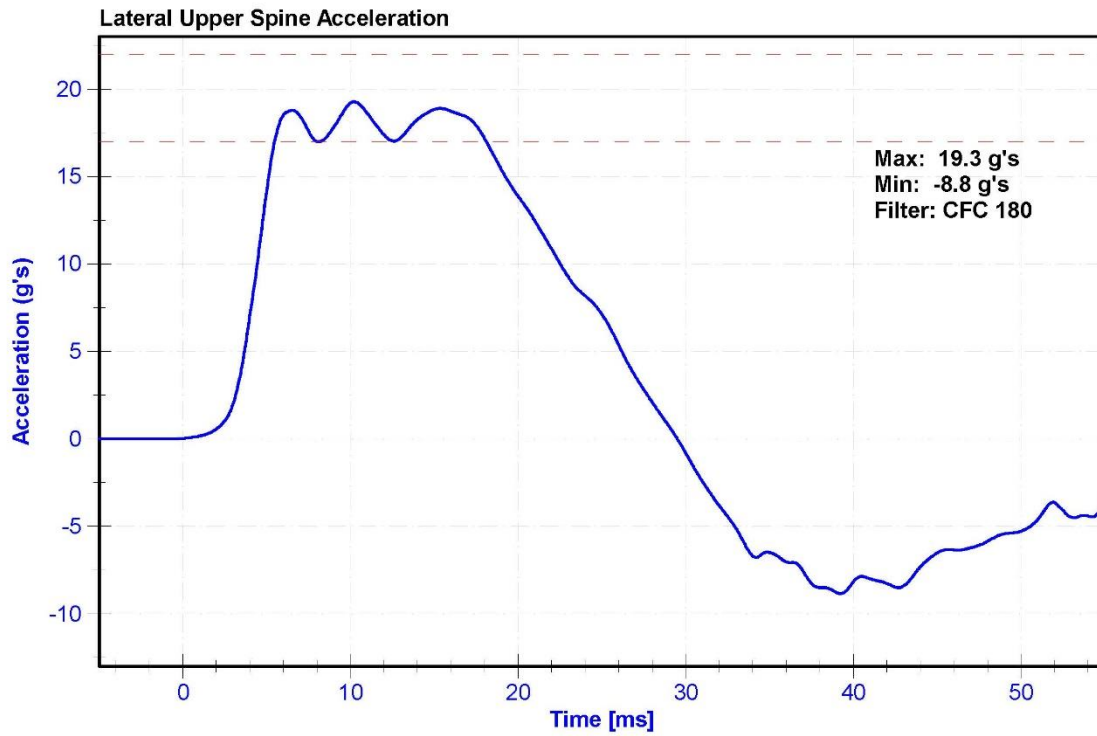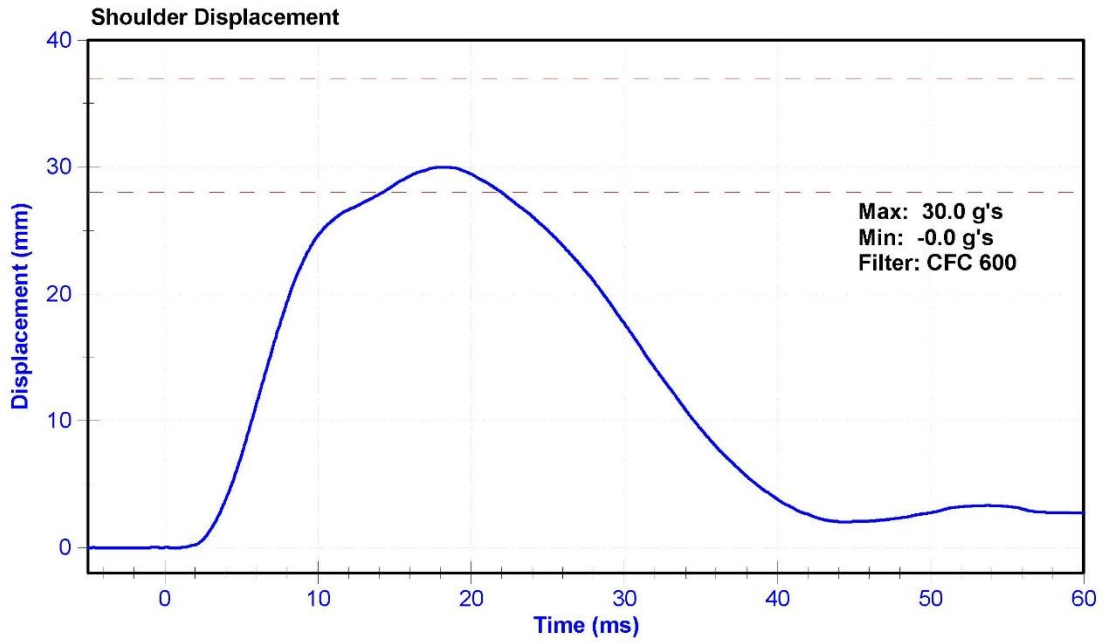


ATD Manufacturer	FTSS	Test Technician	R. Weil
ATD Serial Number	303	Laboratory Supervisor	M. Goehle





Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.0	Pass
Humidity	10	70	%	41.5	Pass
Velocity	6.6	6.8	m/s	6.67	Pass
Probe Acceleration after 5 ms	30	36	g's	35.0	Pass
Lateral Upper Spine Acceleration	34	43	g's	40.4	Pass
Lateral Lower Spine Acceleration	29	37	g's	35.0	Pass
Shoulder Deflection	31	40	mm	37.8	Pass
Upper Thorax Rib Deflection	25	32	mm	27.6	Pass
Mid Thorax Rib Deflection	30	36	mm	31.1	Pass
Lower Thorax Rib Deflection	32	38	mm	32.3	Pass


Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C14972	8/13/2015	2/11/2016
Upper Spine T1 Y Accelerometer	ENDEVCO 7264CT	AC-P63315	10/19/2015	4/18/2016
Upper Spine T12 Y Accelerometer	ENDEVCO 7264CT	AC-P51974	10/19/2015	4/18/2016
Shoulder Potentiometer	Servo 08TC1-3725	DS-008GFE	10/19/2015	10/18/2016
Upper Thorax Rib Potentiometer	Servo 08CT1-3725	DS-1199GFE	10/19/2015	10/18/2016
Middle Thorax Rib Potentiometer	Servo 08CT1-3725	DS-1246GFE	10/19/2015	10/18/2016
Lower Thorax Rib Potentiometer	Servo 08CT1-3725	DS-1256GFE	10/19/2015	10/18/2016

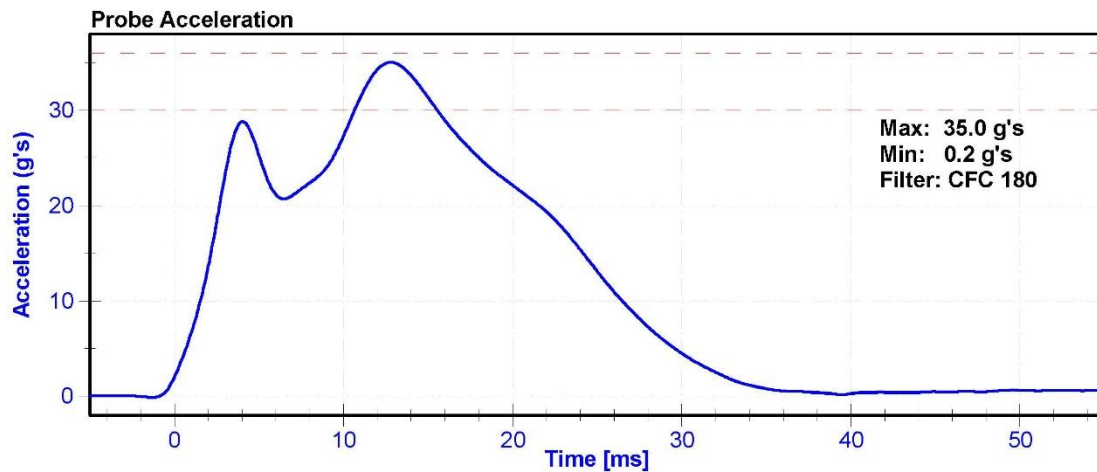


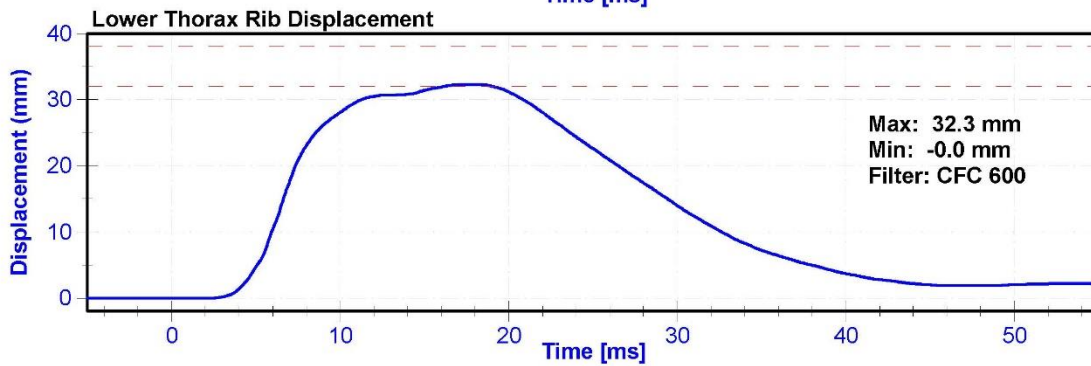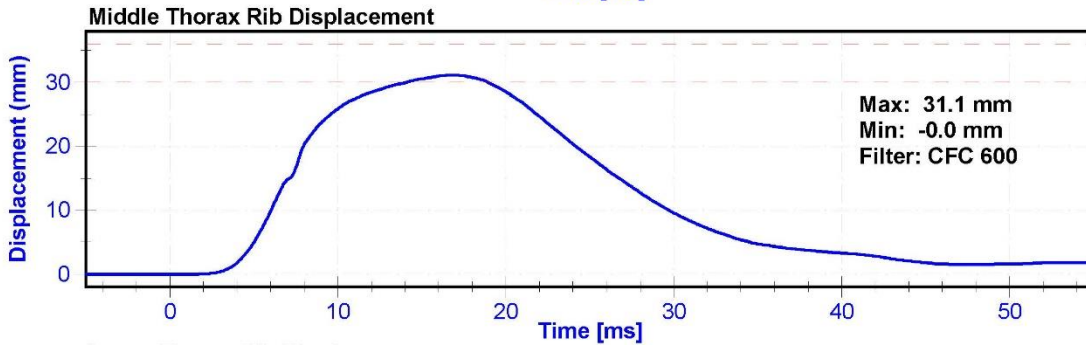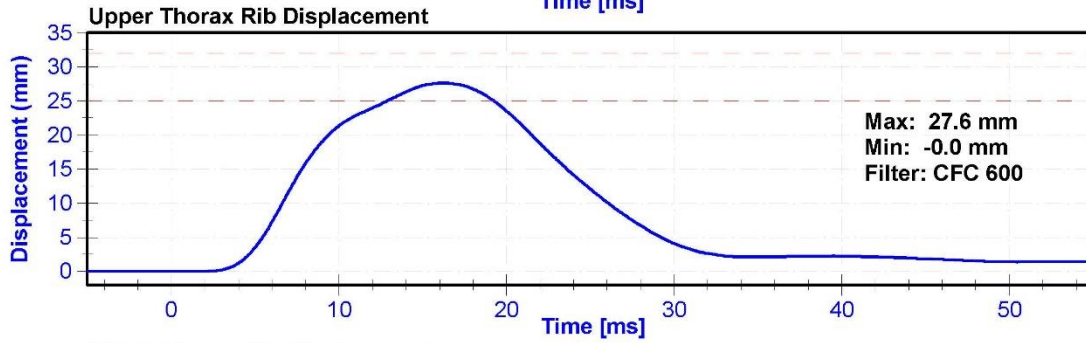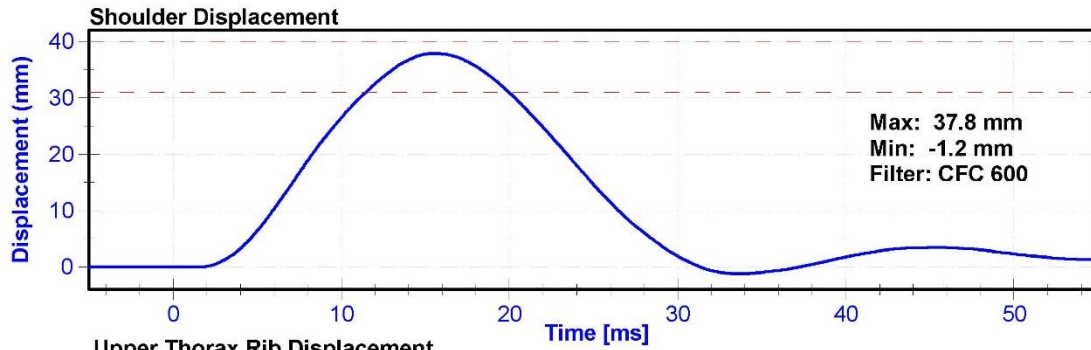

Lateral Upper Spine Acceleration

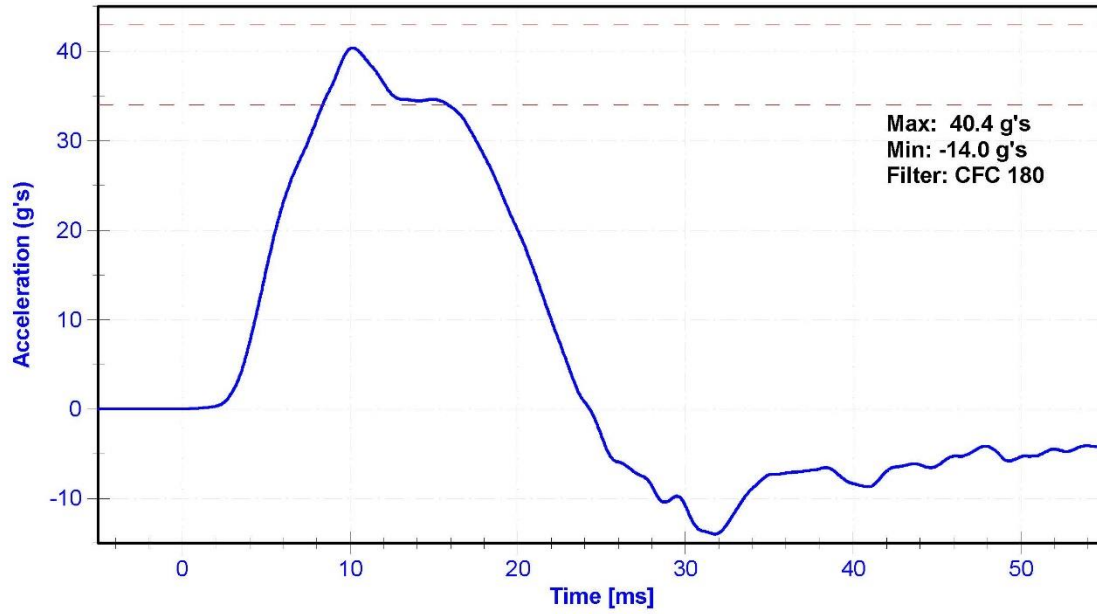

Lateral Lower Spine Acceleration

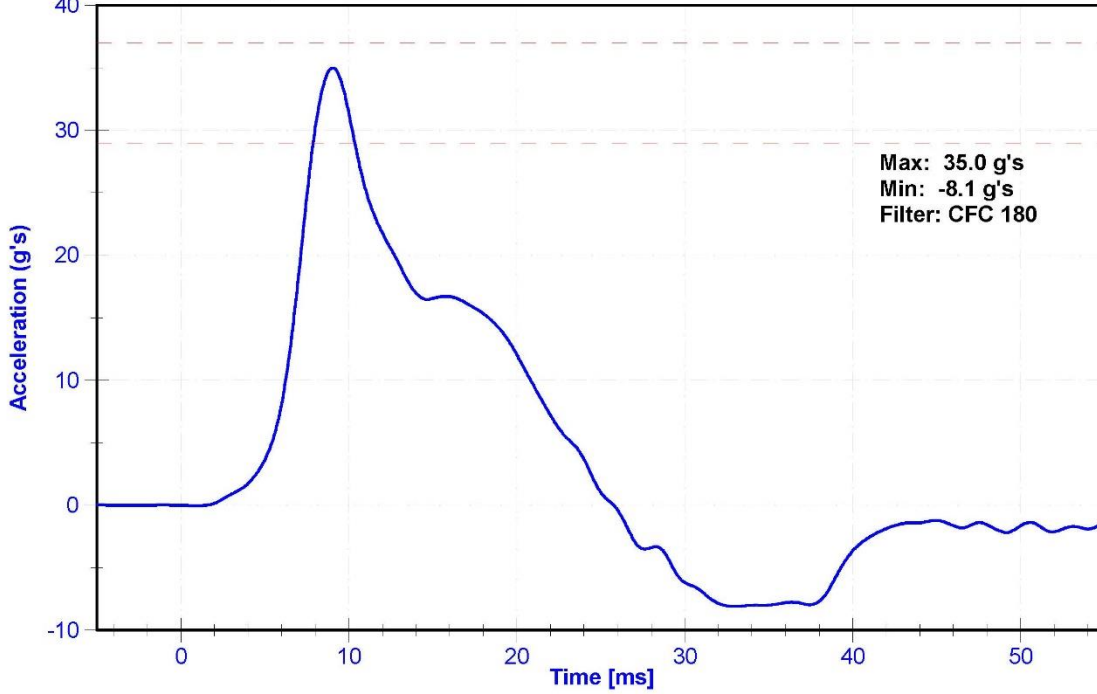


ATD Manufacturer	FTSS	Test Technician	R. Weil
ATD Serial Number	303	Laboratory Supervisor	M. Goehle




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21	Pass
Humidity	10	70	%	46.8	Pass
Velocity	4.2	4.4	m/s	4.31	Pass
Probe Acceleration	14	18	g's	16.3	Pass
Lateral Upper Spine Acceleration	13	17	g's	16.4	Pass
Lateral Lower Spine Acceleration	7	11	g's	9.9	Pass
Upper Thorax Rib Deflection	32	40	mm	37.0	Pass
Middle Thorax Rib Deflection	39	45	mm	42.6	Pass
Lower Thorax Rib Deflection	35	43	mm	39.2	Pass


Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C14972	8/13/2015	2/11/2016
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P63315	10/19/2015	4/18/2016
Lower Spine Y Accelerometer	ENDEVCO 7264CT	AC-P51974	10/19/2015	4/18/2016
Upper Thorax Rib Potentiometer	Servo 08CT1-3725	DS-1199GFE	10/19/2015	10/18/2016
Middle Thorax Rib Potentiometer	Servo 08CT1-3725	DS-1246GFE	10/19/2015	10/18/2016
Lower Thorax Rib Potentiometer	Servo 08CT1-3725	DS-1256GFE	10/19/2015	10/18/2016

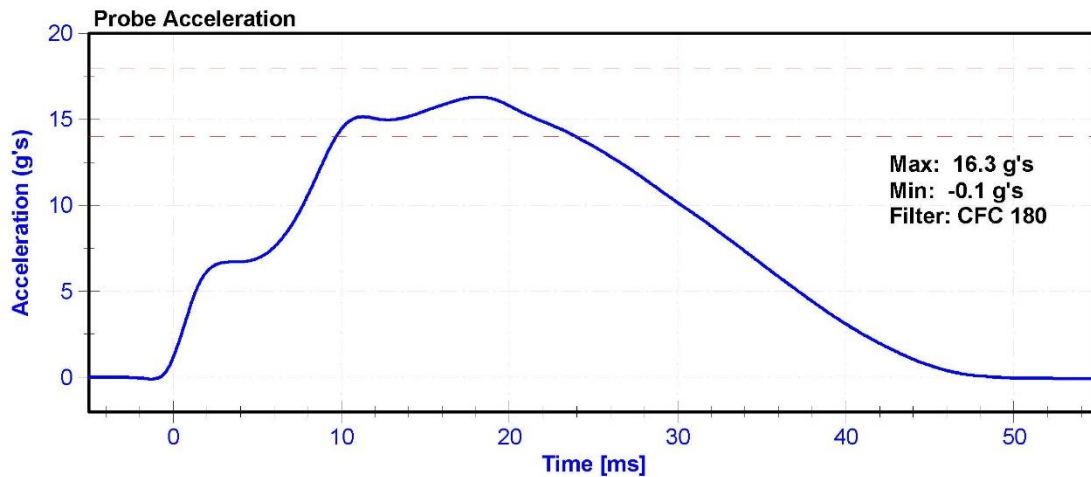


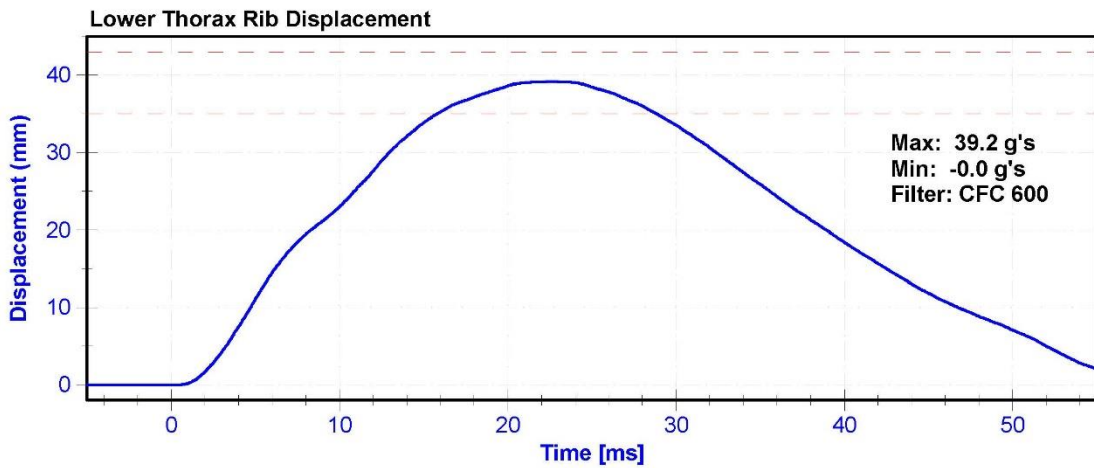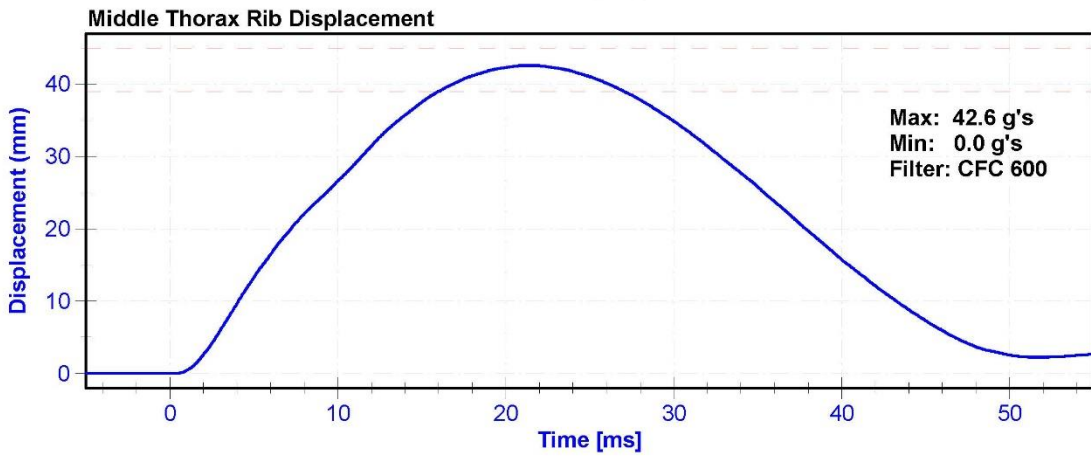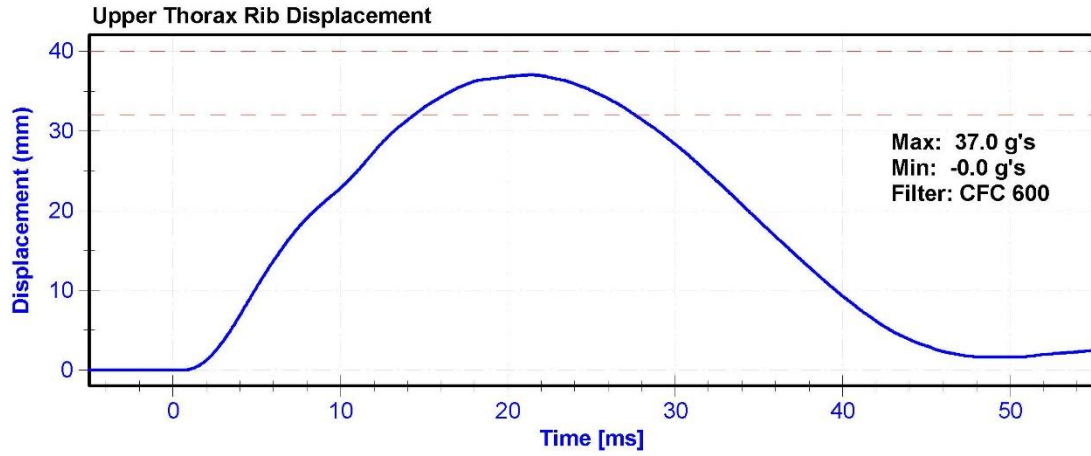

Lateral Upper Spine Acceleration

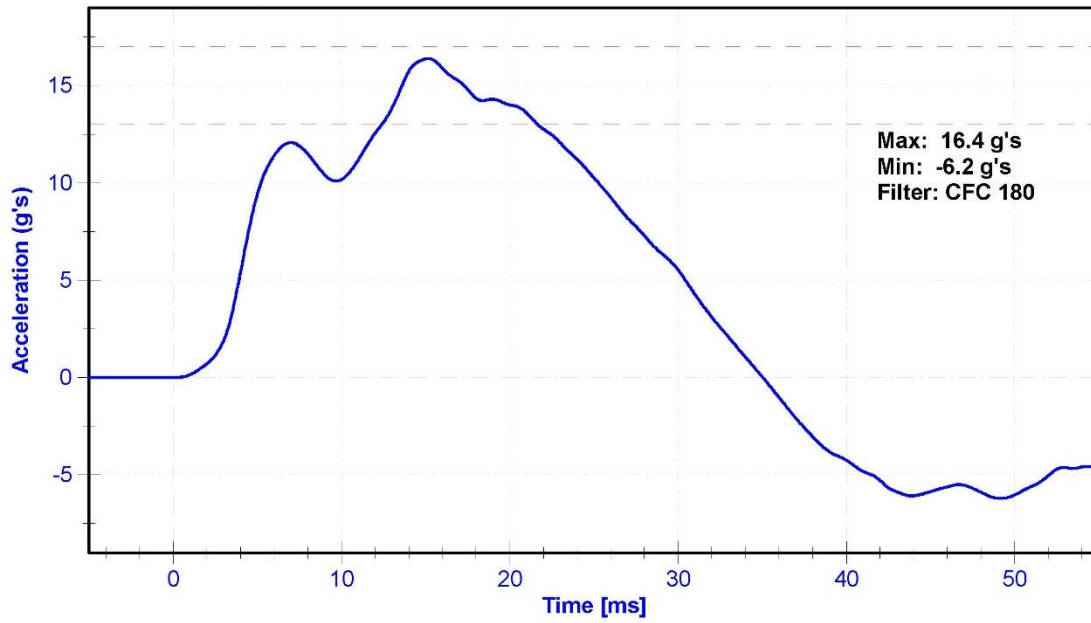

Lateral Lower Spine Acceleration

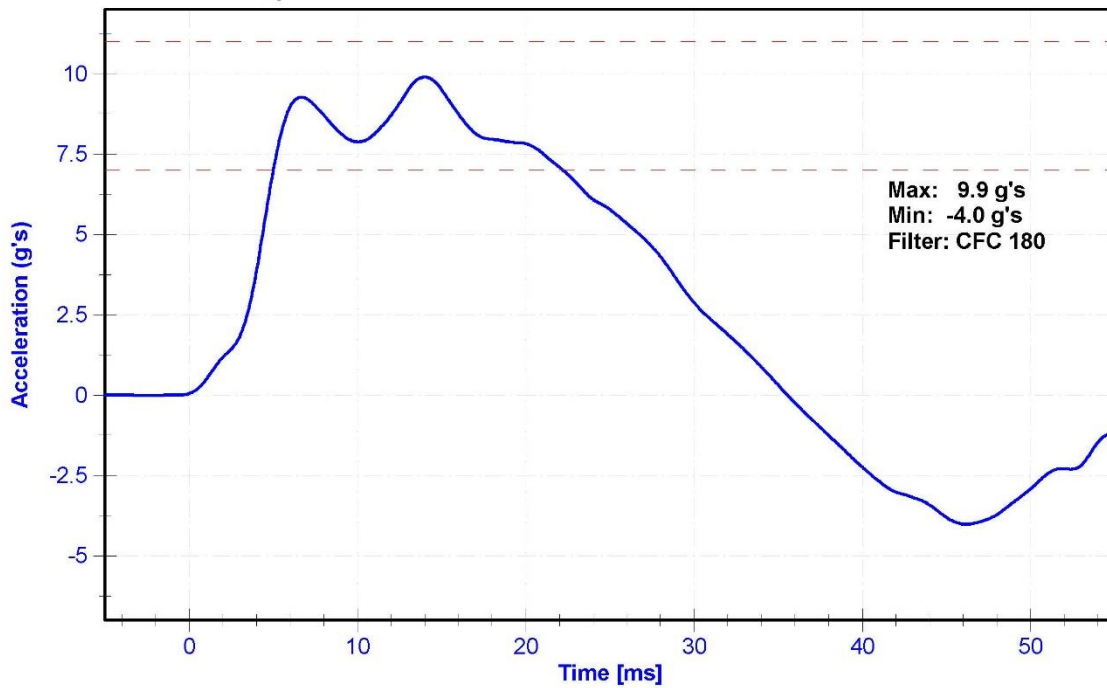


ATD Manufacturer	FTSS	Test Technician	R. Weil
ATD Serial Number	303	Laboratory Supervisor	M. Goehle



Results


Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.8	Pass
Humidity	10	70	%	48.0	Pass
Velocity	4.2	4.4	m/s	4.30	Pass
Probe Acceleration	12	16	g's	15.6	Pass
Lateral Lower Spine Acceleration	9	14	g's	11.5	Pass
Upper Abdomen Rib Deflection	36	47	mm	39.3	Pass
Lower Abdomen Rib Deflection	33	44	mm	36.6	Pass

Transducer Calibrations


Channel	Manufacturer	Serial Number	Calibratio Date	Calibration Due Date
Probe Accelerometer	ENDEVCO 7231CT	AC-C14972	8/13/2015	2/11/2016
Lower Spine Y Accelerometer	ENDEVCO 7264CT	AC-P51974	10/19/2015	4/18/2016
Upper Abdomen Rib Potentiometer	Servo 08CT1-3725	DS-1274GFE	10/19/2015	10/18/2016
Lower Abdomen Rib Potentiometer	Servo 08CT1-3725	DS-1285GFE	10/19/2015	10/18/2016

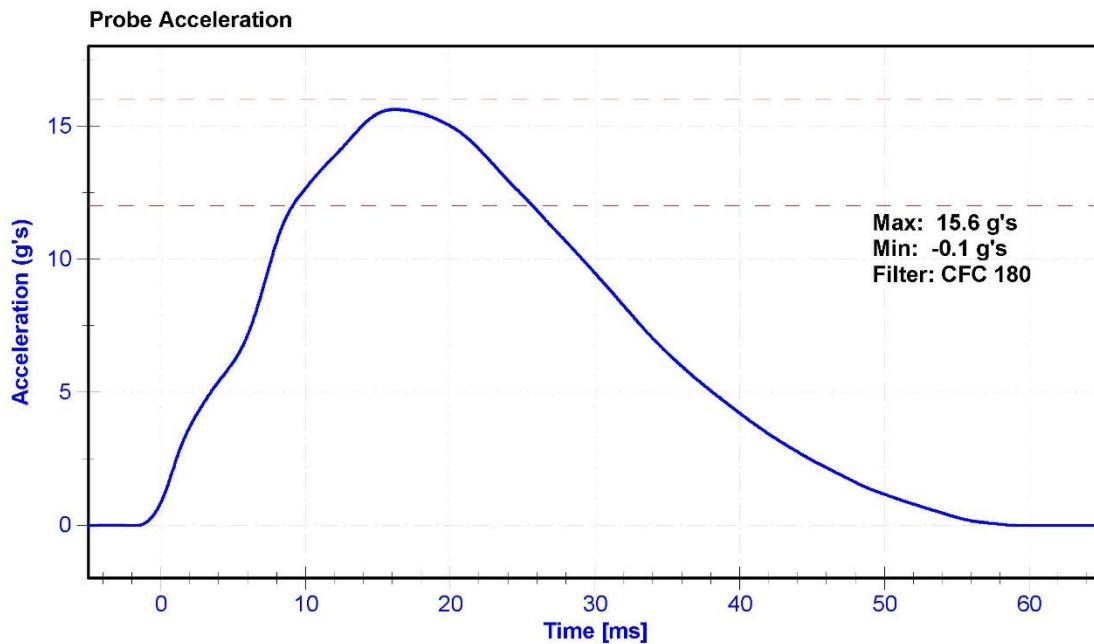

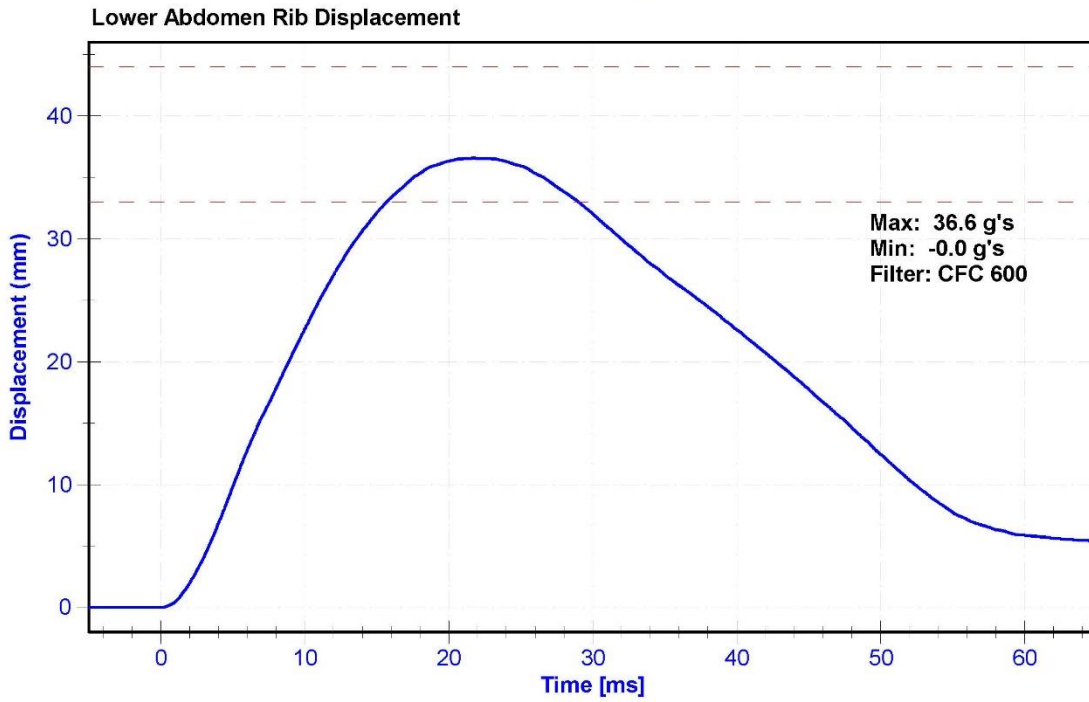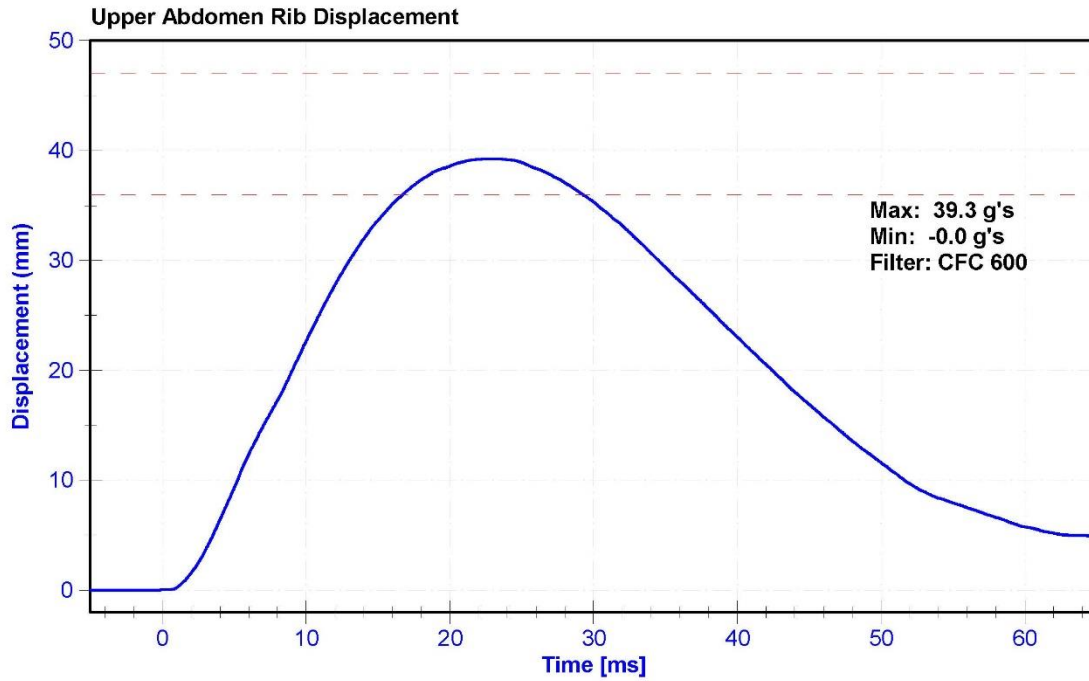

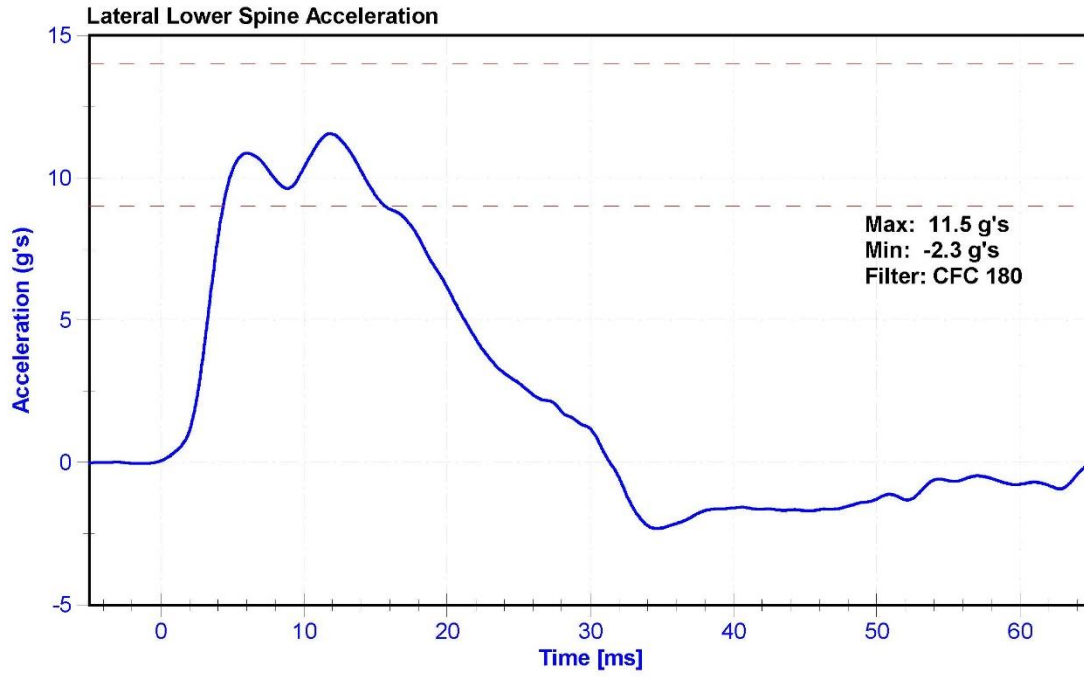

Resultant Data - SIDIIS Plug Compression

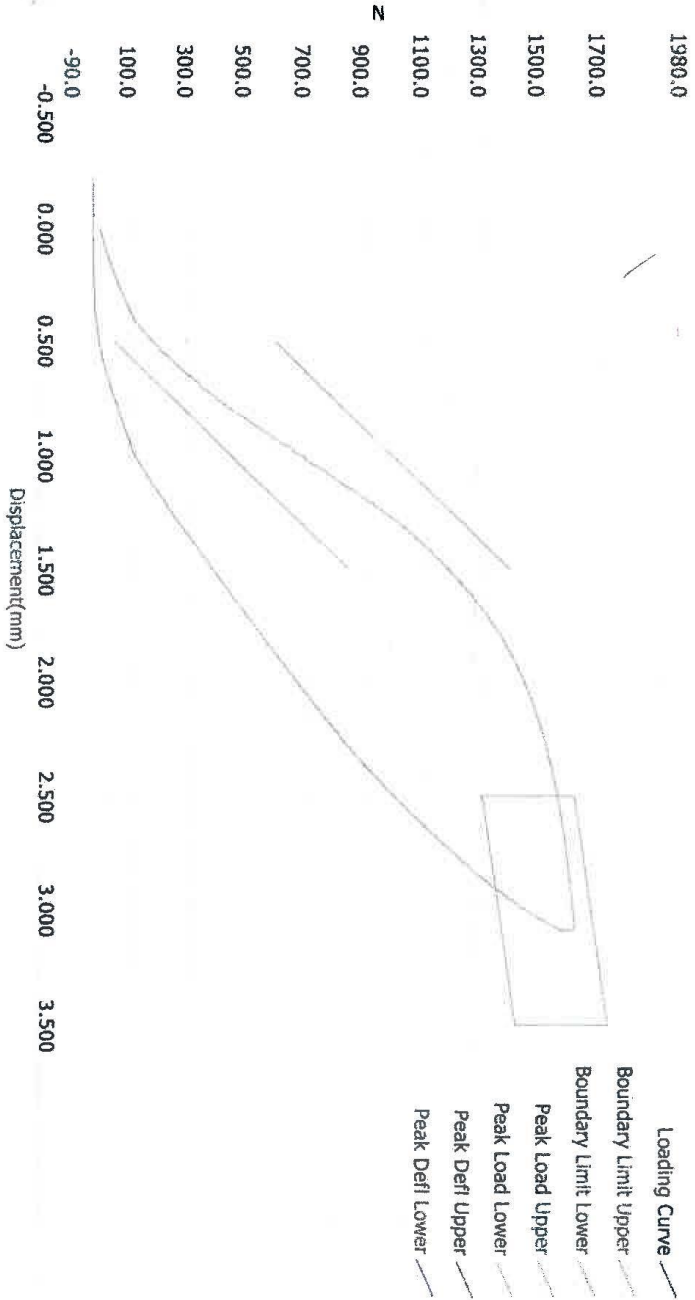

ATD Calibration Lab

CSRTT


10/22/15

Current Date : 9/20/2011

Current Time : 20:21:39

Test ID	Part Serial Number	Test Date	Test Time
45959	45959	9/20/2011	8:21 PM
Cert ID	ATD Serial Number	ATD Type	
N/A	N/A	SIDIIS	

Resultant Data - SIDI's Plug Compression

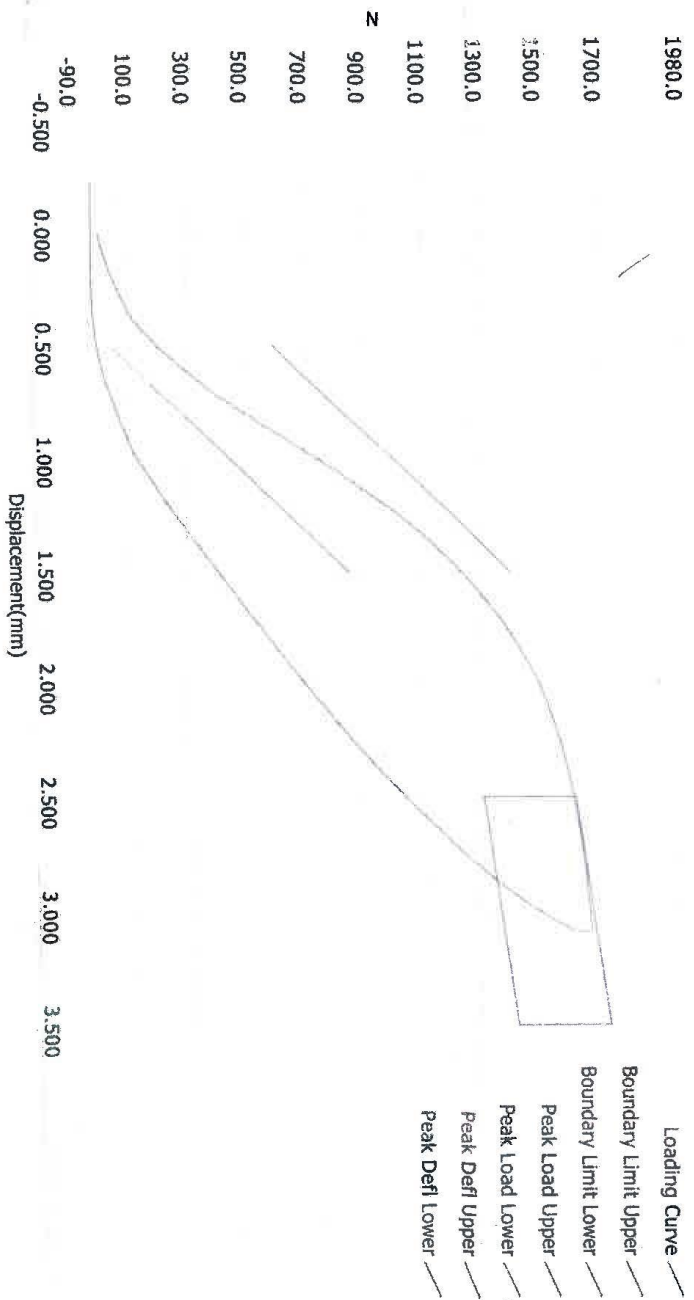

ATD Calibration Lab

Test ID	Part Serial Number	Test Date	Test Time
46020	46020	9/20/2011	10:18 PM
Cart ID	ATD Serial Number	ATD Type	
N/A	N/A	SIDI's	

CRASH

Current Date : 9/20/2011

Current Time : 22:18:58


ATD Manufacturer	FTSS	Test Technician	R. Weil
ATD Serial Number	303	Laboratory Supervisor	M. Goehle



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.7	Pass
Humidity	10	70	%	49	Pass
Velocity	6.6	6.8	m/s	6.66	Pass
Probe Acceleration	38	47	g's	45.9	Pass
Lateral Pelvis Acceleration after 6ms	34	42	g's	41.7	Pass
Acetabulum Force	3,600	4,300	N	4094.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C14972	8/13/2015	2/11/2016
Pelvis Y Accelerometer	ENDEVCO 7264	AC-P51259	10/19/2015	4/18/2016
Acetabulum Load Cell	Denton IF-520	LC-236Fy	6/29/2015	6/28/2016
Certification Plug	Humanetics	45959	09/20/2011	N/A
Crash Test Plug	Humanetics	46020	9/20/2011	N/A

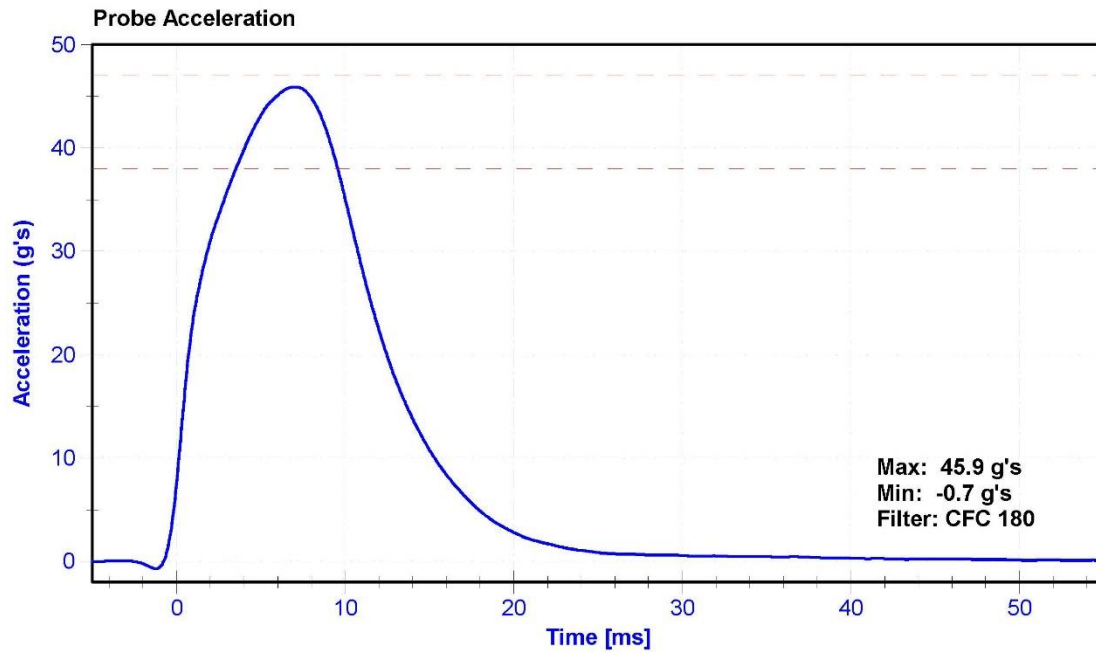

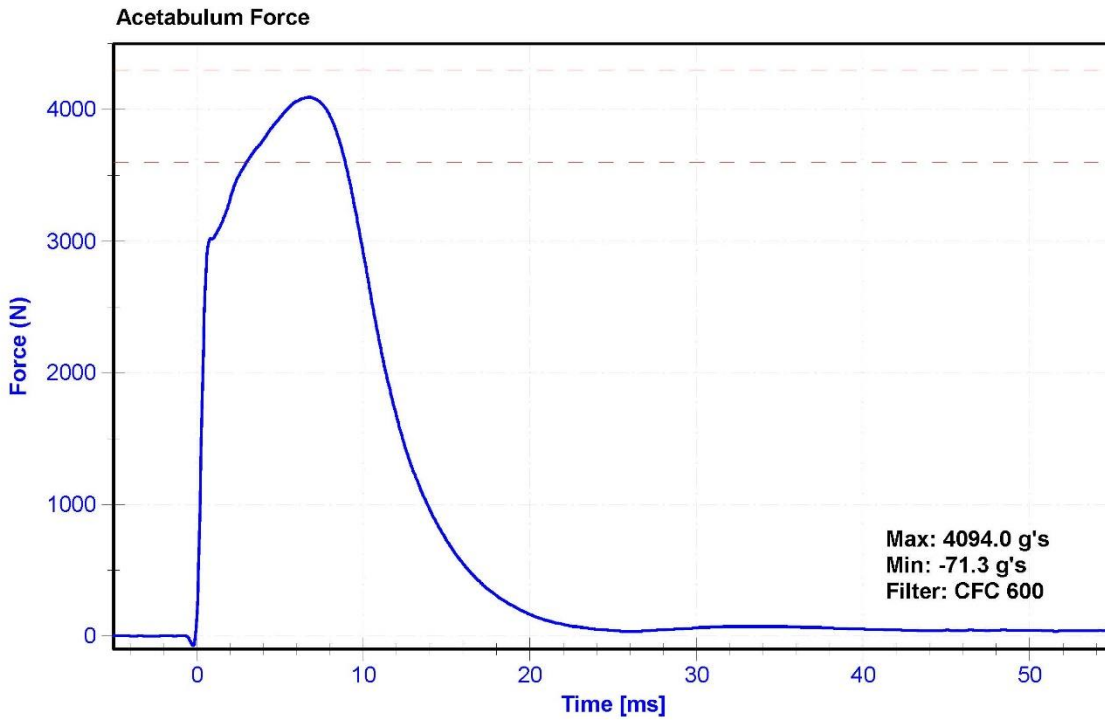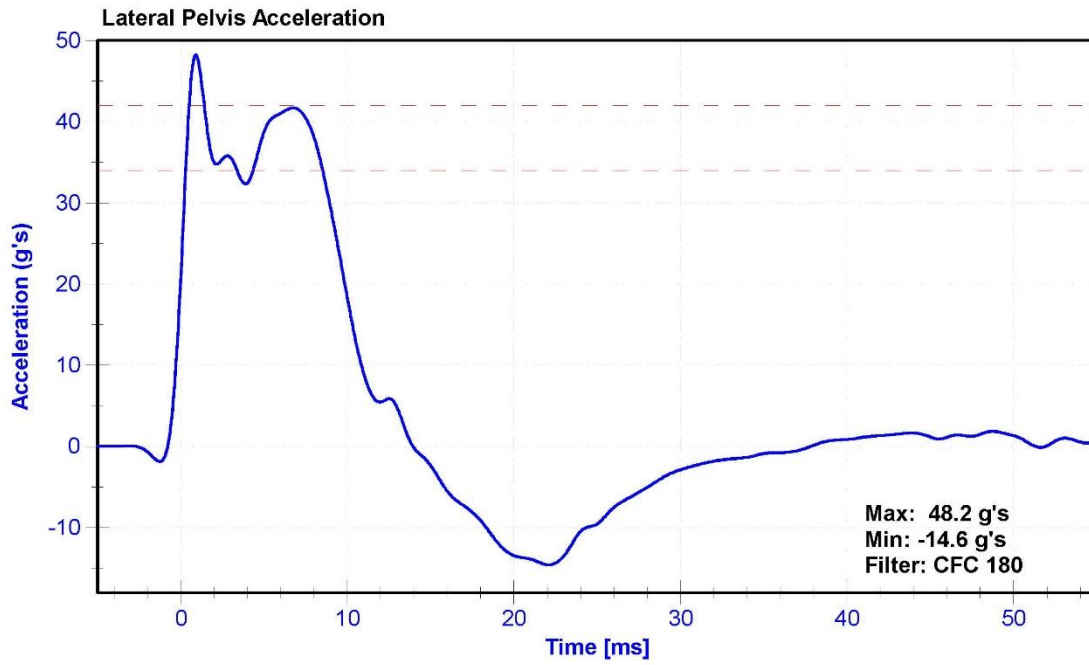


ATD Manufacturer	FTSS	Test Technician	R. Weil
ATD Serial Number	303	Laboratory Supervisor	M. Goehle



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.7	Pass
Humidity	10	70	%	51.3	Pass
Velocity	4.2	4.4	m/s	4.29	Pass
Probe Acceleration	36	45	g's	40.4	Pass
Lateral Pelvis Acceleration	28	39	g's	32.2	Pass
Iliac Force	4,100	5,100	N	4498.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C14972	8/13/2015	2/11/2016
Pelvis Y Accelerometer	ENDEVCO 7264	AC-P51259	10/19/2015	4/18/2016
Iliac Load Cell	DENTON 3228J	LC-285Fy	7/21/2015	7/20/2016

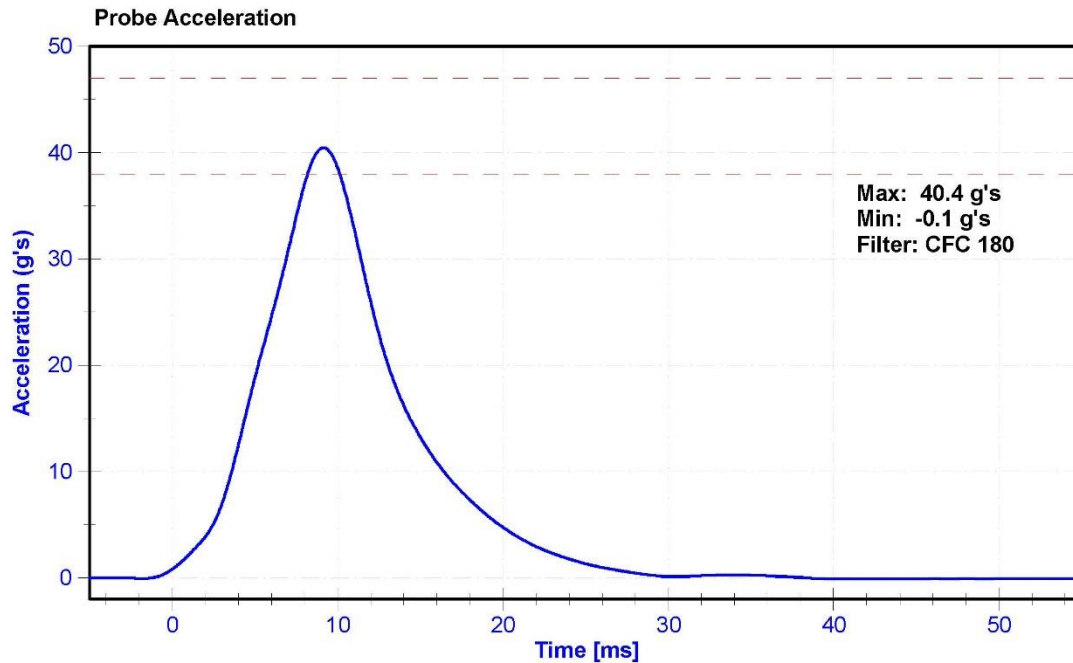

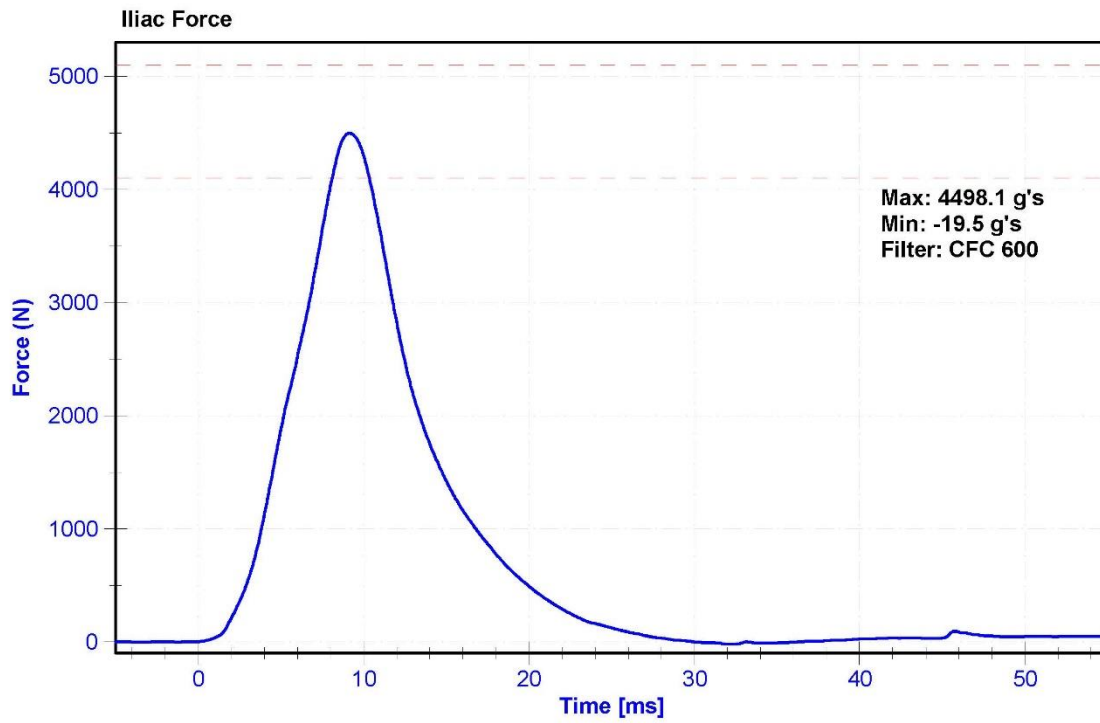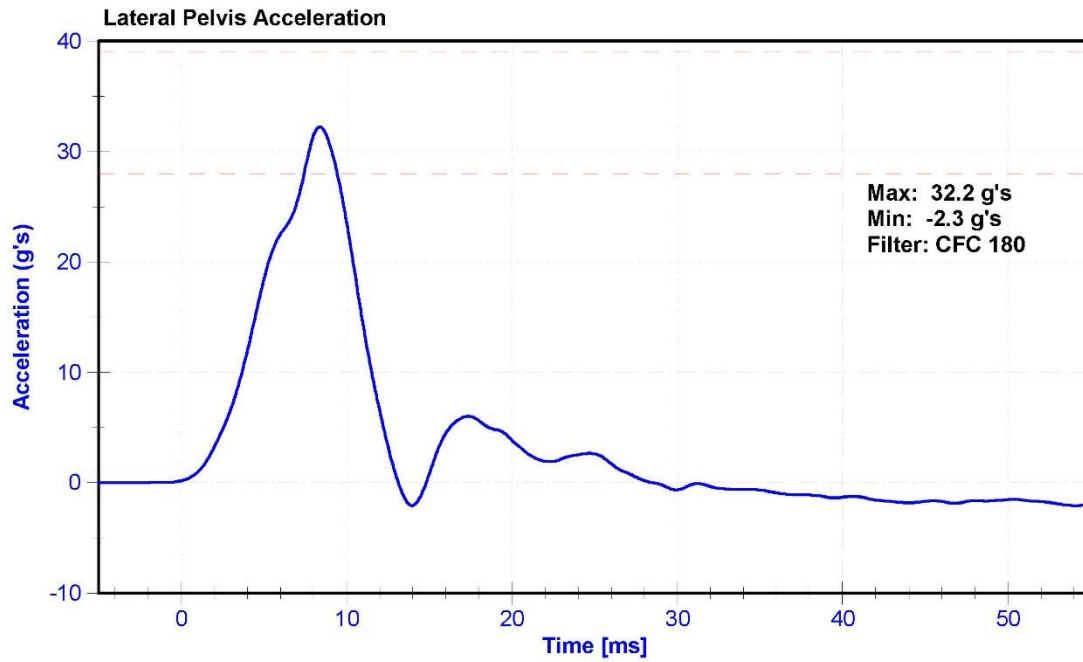

CALIBRATION TEST RESULTS

POST-TEST

EUROSID 2 (ES-2RE) MALE – DRIVER ATD

SERIAL NO: F034

(CONFIGURED FOR LEFT SIDE IMPACT)




External Measurements - EuroSID-2re


Technician: M.Hartung

Date: 10/29/2015

Dummy Serial Number: F034

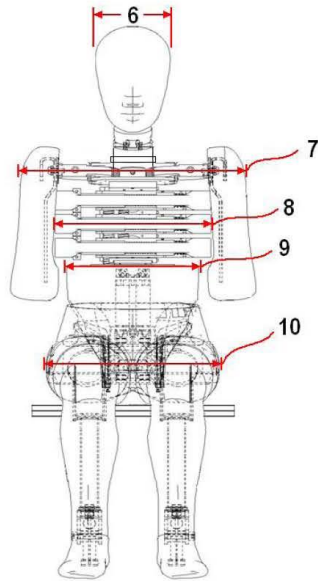

FRONT VIEW

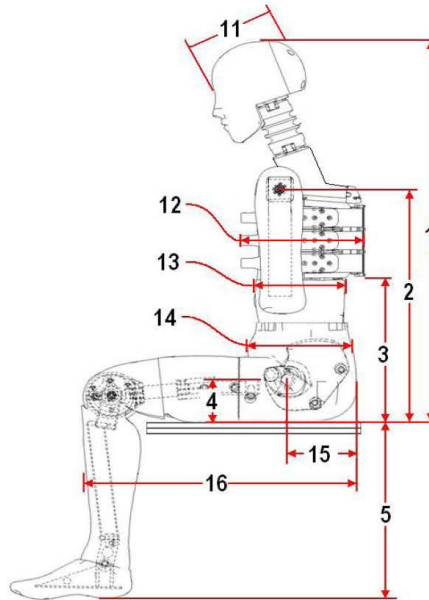

SIDE VIEW

Dim. No.	Description	Specification (mm)		Result (mm)	Pass/Fail
1	Sitting Height	900	918	911	Pass
2	Seat to Shoulder Joint	558	572	560	Pass
3	Seat to Lower Face of Thoracic Spine Box	346	356	350	Pass
4	Seat to Hip Joint (center of bolt)	97	103	99	Pass
5	Sole to Seat, Sitting	333	451	415	Pass
6	Head Width	152	158	155	Pass
7	Shoulder/Arm Width	461	479	477	Pass
8	Thorax Width	322	332	330	Pass
9	Abdomen Width	273	287	283	Pass
10	Pelvis Lap Width	359	373	366	Pass
11	Head Depth	196	206	200	Pass
12	Thorax Depth	262	272	265	Pass
13	Abdomen Depth	194	204	201	Pass
14	Pelvis Depth	235	245	239	Pass
15	Back of Buttocks to Hip Joint (center of bolt)	150	160	155	Pass
16	Back of Buttocks to Front Knee	597	615	600	Pass


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.2	Pass
Humidity	10	70	%	29.6	Pass
Resultant Acceleration	125	155	g's	132.4	Pass
Oscillation	0	15	%	4.90	Pass
Fore-Aft Acceleration	-15	15	g's	4.5	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P58904	10/19/2015	4/18/2016
Y Accelerometer	ENDEVCO 7264CT	AC-P58911	10/19/2015	4/18/2016
Z Accelerometer	ENDEVCO 7264CT	AC-P58776	10/19/2015	4/18/2016

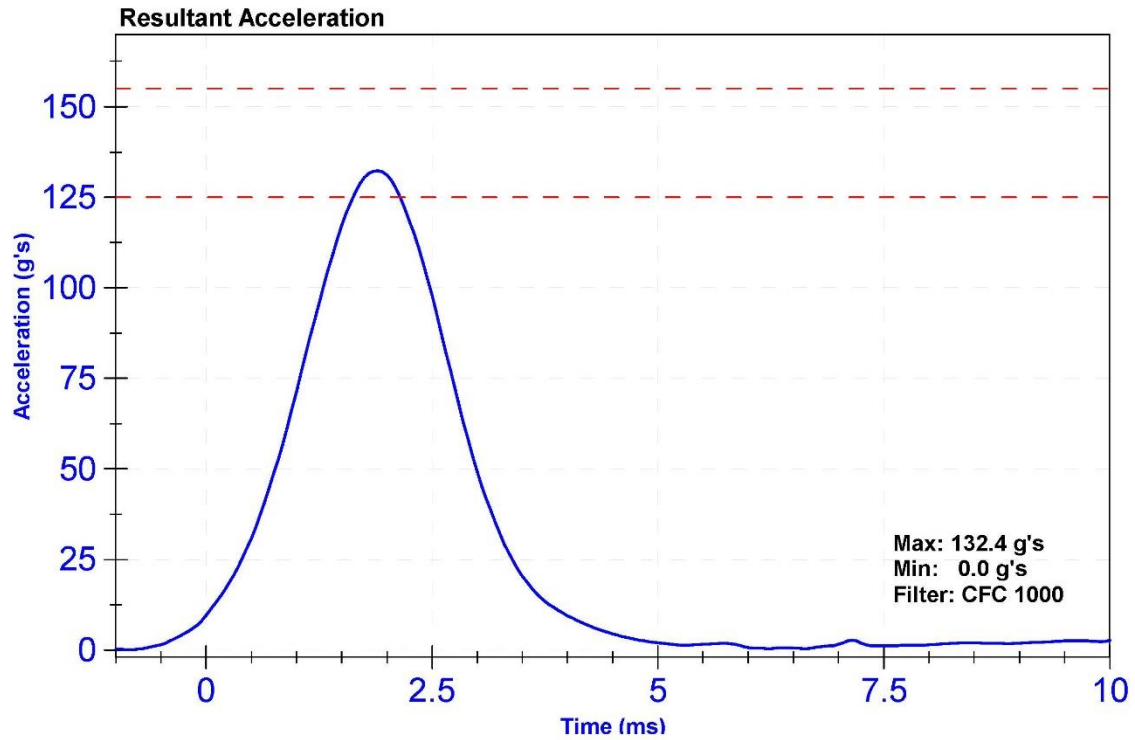

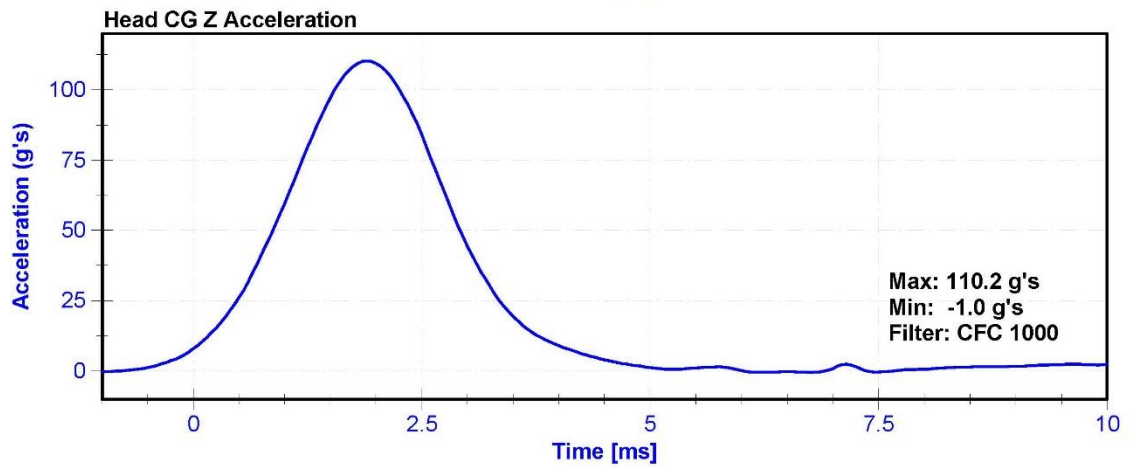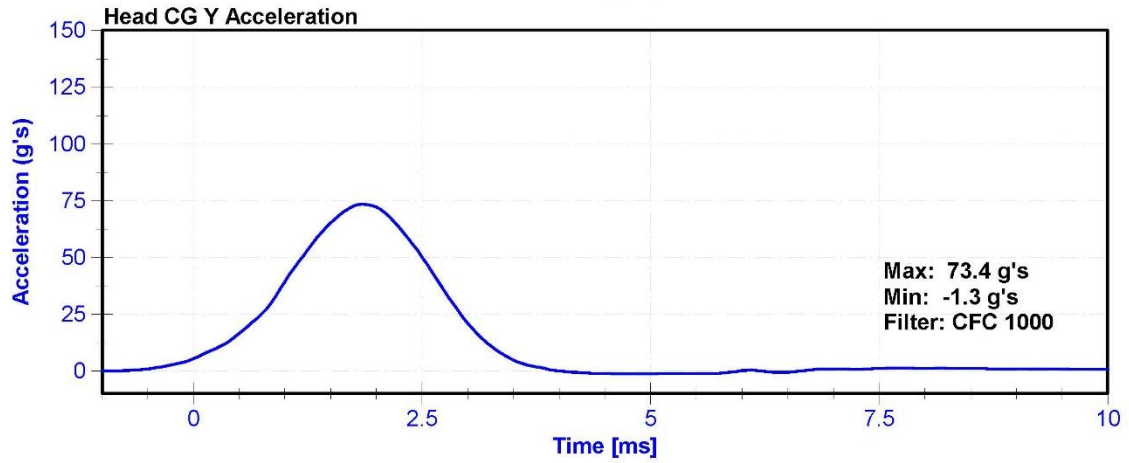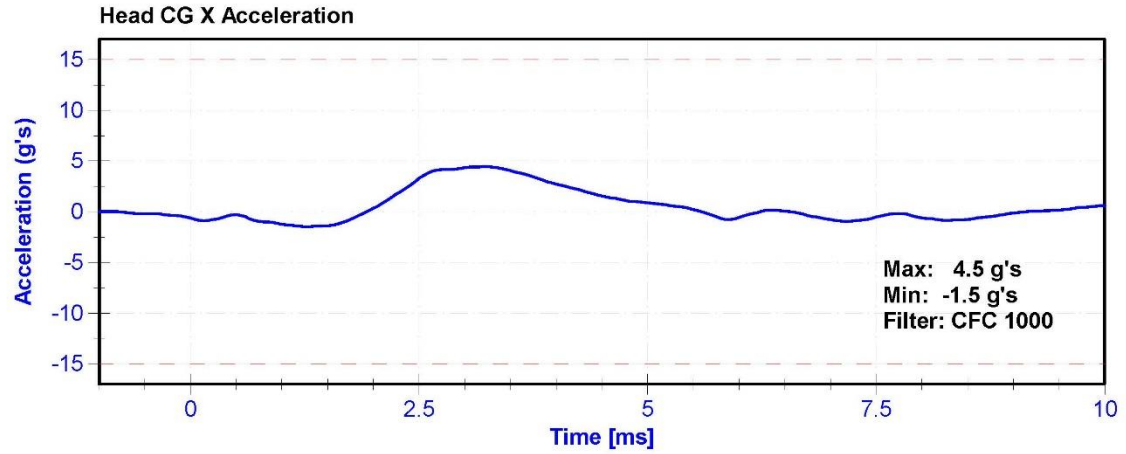


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.2	Pass
Humidity	10	70	%	27.8	Pass
Velocity	3.3	3.5	m/s	3.46	Pass
Lateral Neck Rotation	49	59	deg	53.9	Pass
Time at Maximum Rotation	54	66	ms	58.7	Pass
Time of Rotation Decay from Maximum	53	88	ms	57.5	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5F3	5/7/2015	11/7/2015
Front Pendulum Potentiometer	SP22G	DS-094	9/24/2015	9/23/2016
Headform Potentiometer	SP22G	DS-095	9/24/2015	9/23/2016

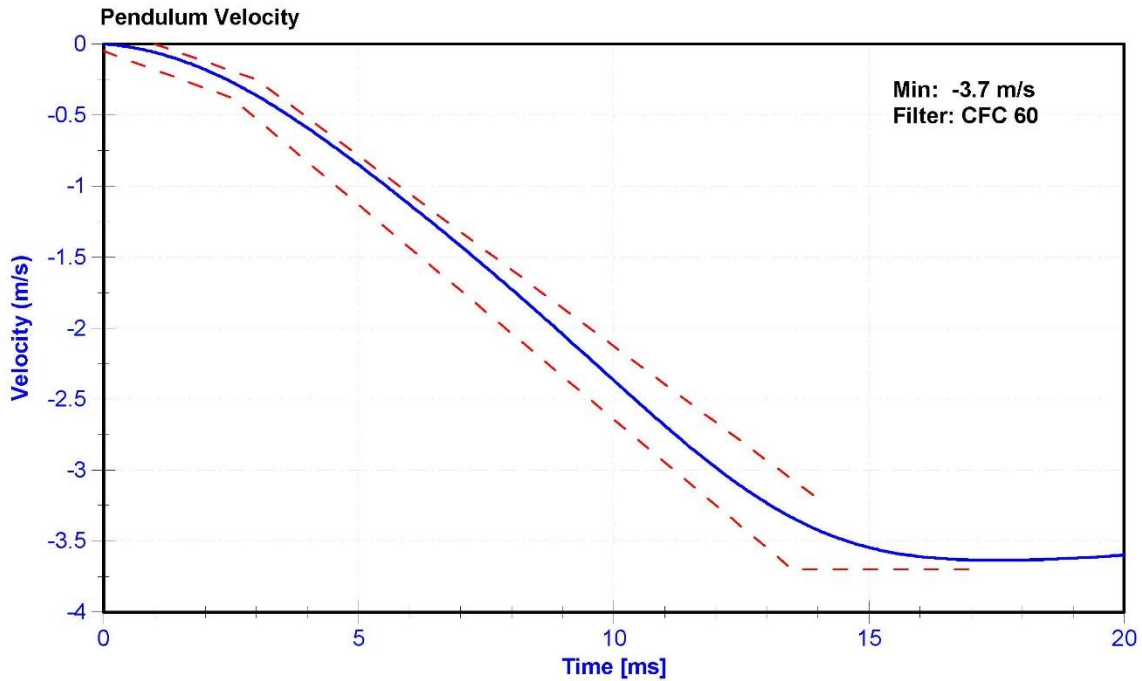

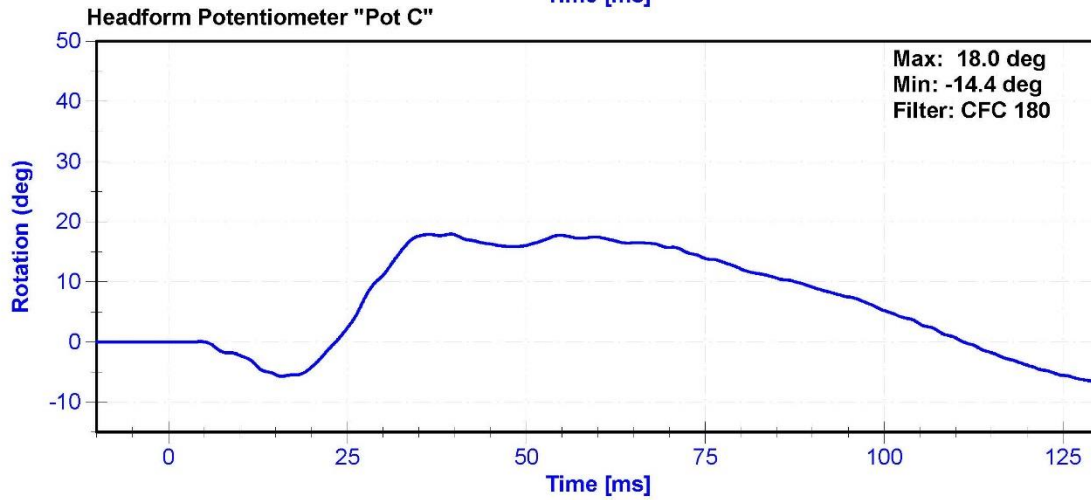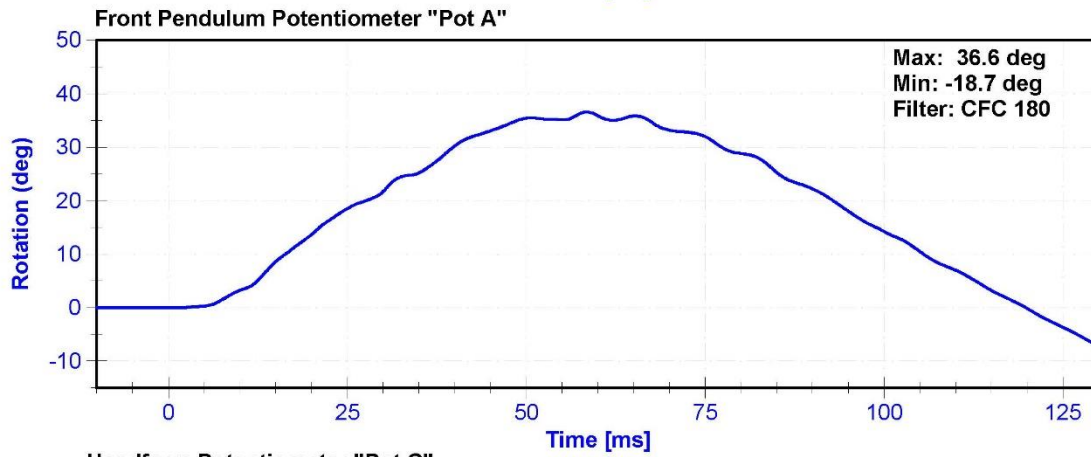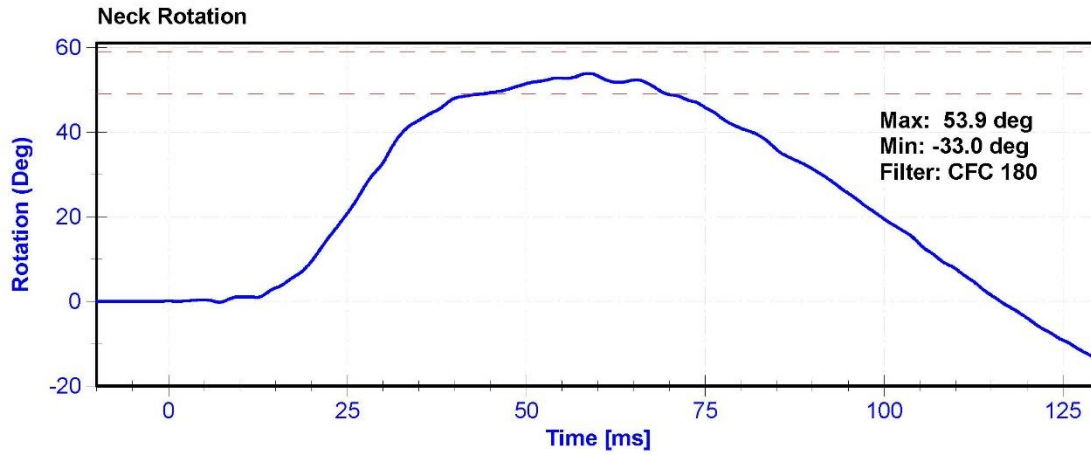


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	40.8	Pass
Velocity	4.2	4.4	m/s	4.22	Pass
Probe Acceleration	7.5	10.5	g's	9.98	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	ENDEVCO 7231CT	AC-C14972	8/13/2015	2/11/2016

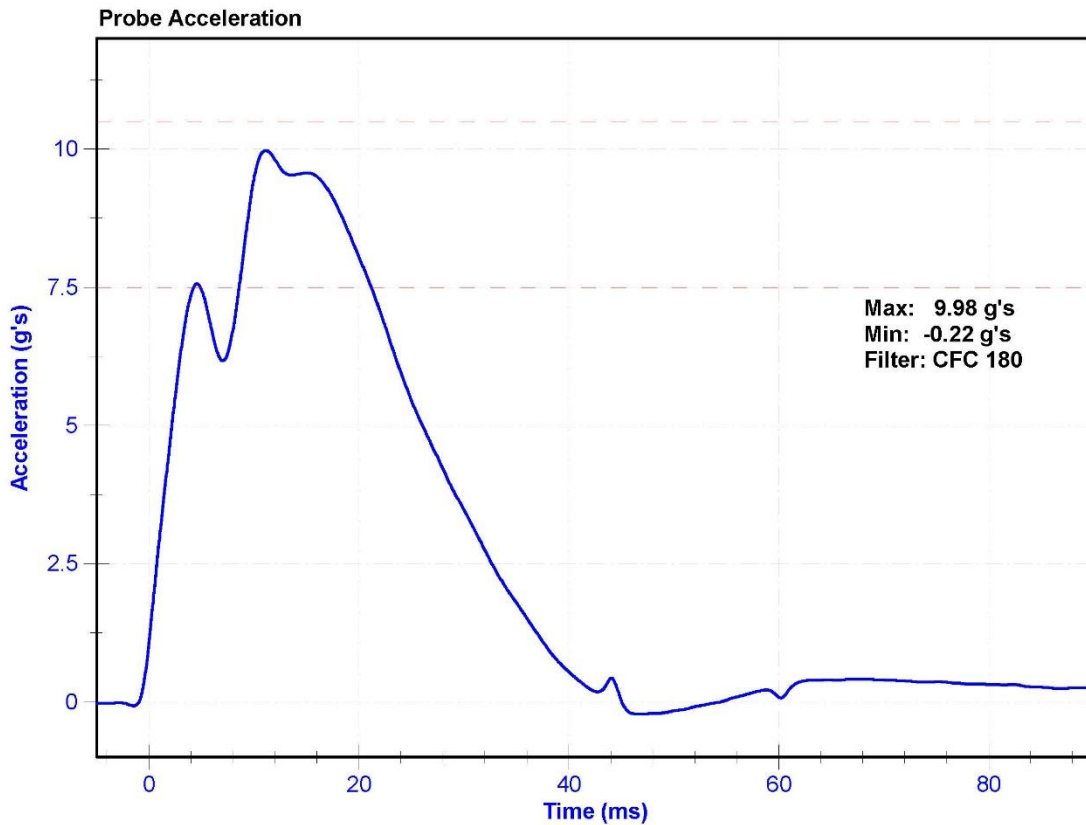


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.1	Pass
Humidity	10	70	%	58.4	Pass
Rib Displacement	36	40	mm	36.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-183GFE	10/19/2015	10/18/2016

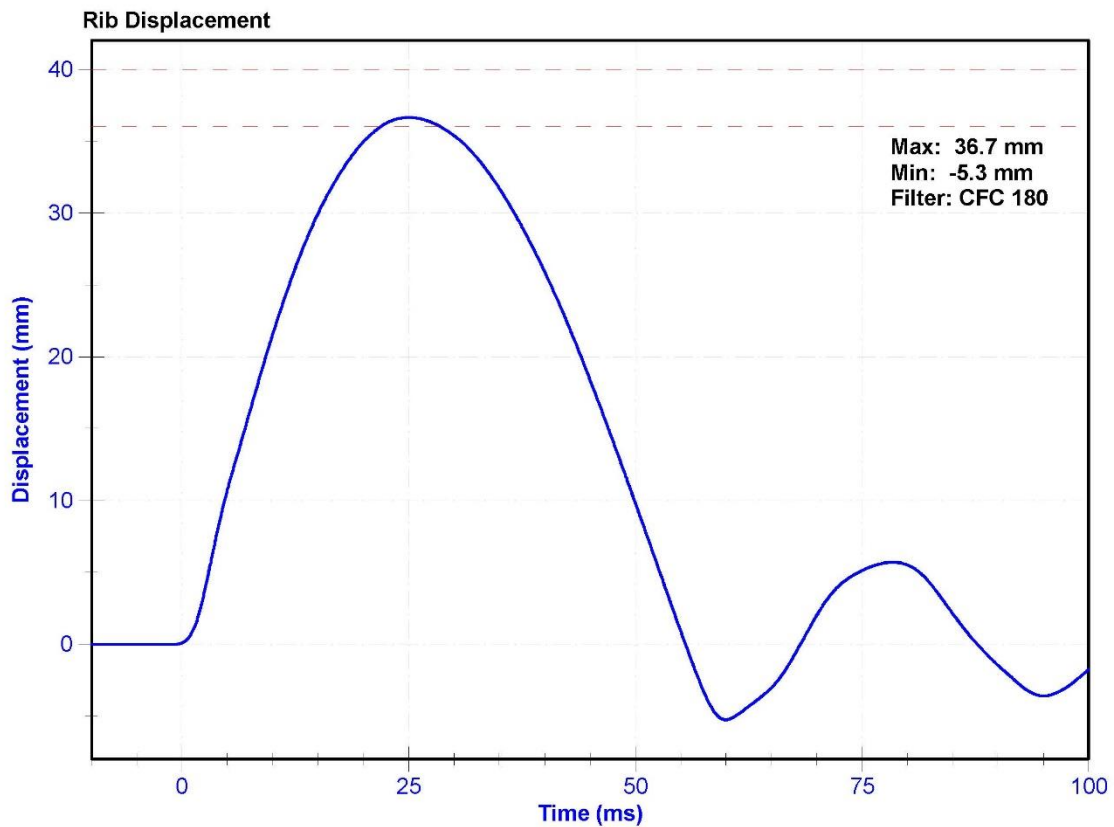


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.1	Pass
Humidity	10	70	%	58.4	Pass
Rib Displacement	46	51	mm	46.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-183GFE	10/19/2015	10/18/2016

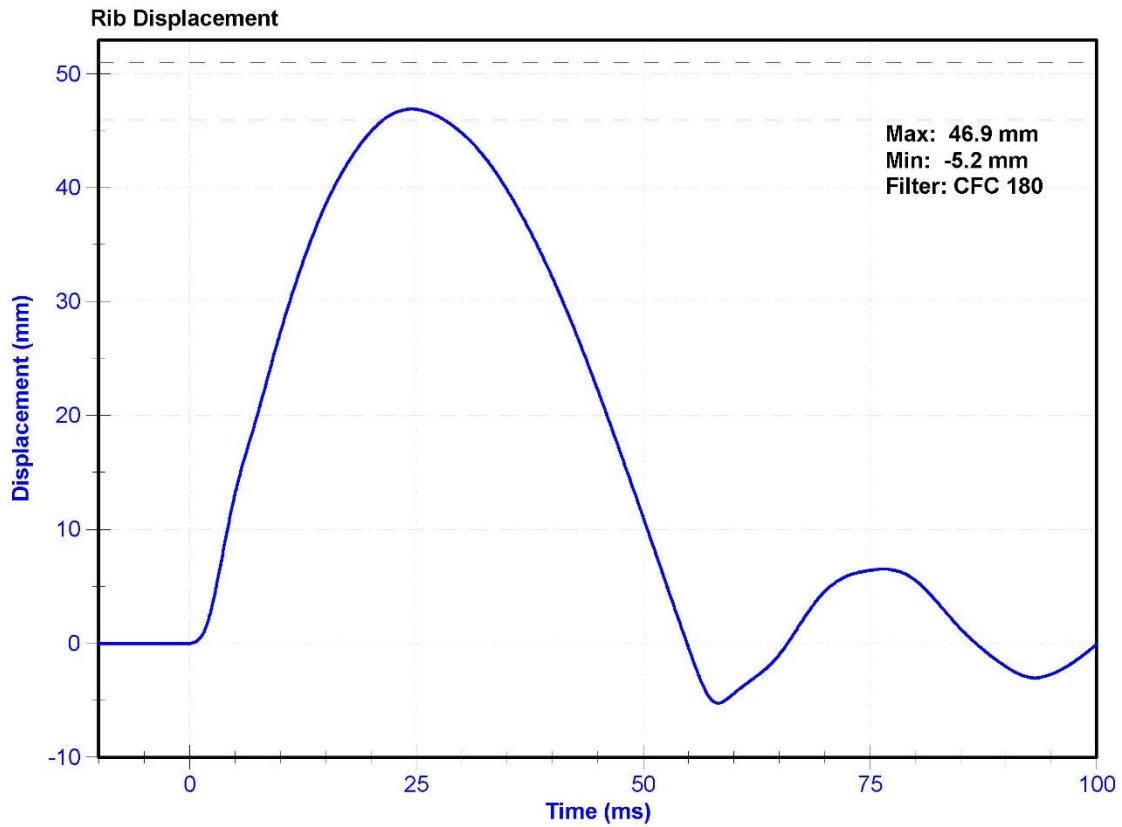


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.1	Pass
Humidity	10	70	%	58.4	Pass
Rib Displacement	36	40	mm	37.5	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-184GFE	10/19/2015	10/18/2016

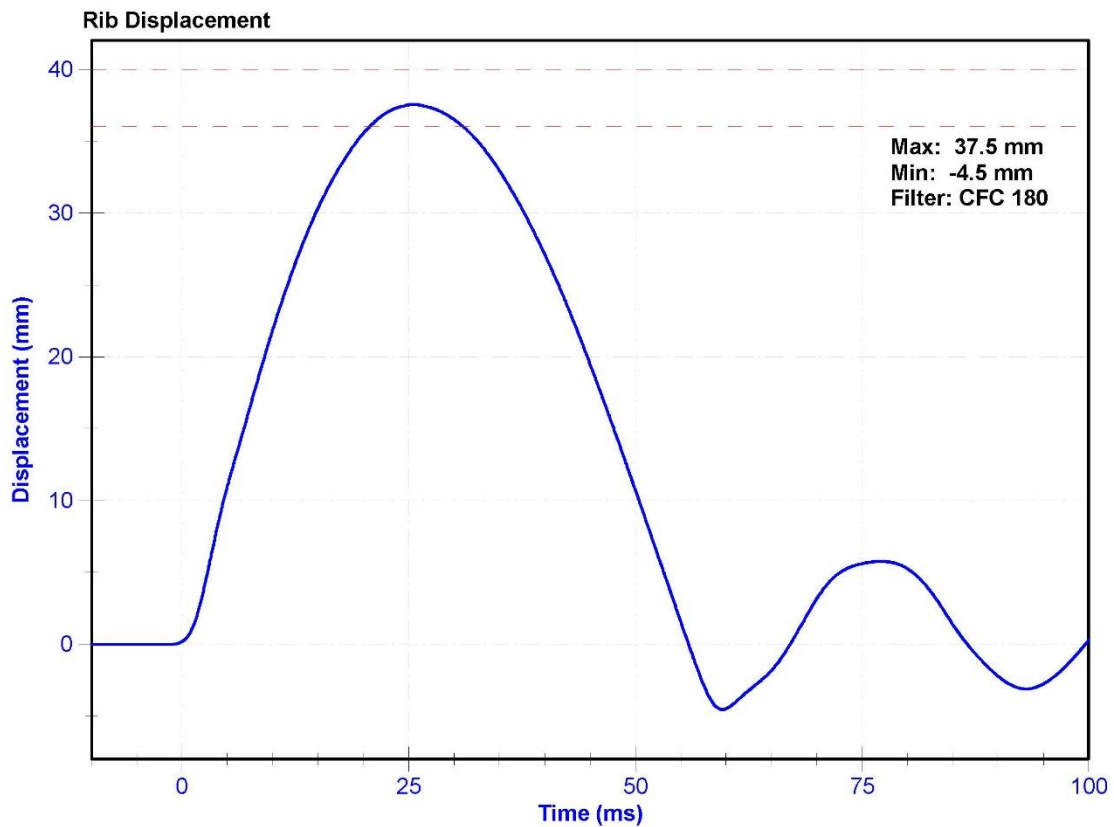


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.1	Pass
Humidity	10	70	%	58.4	Pass
Rib Displacement	46	51	mm	48.6	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-184GFE	10/19/2015	10/18/2016

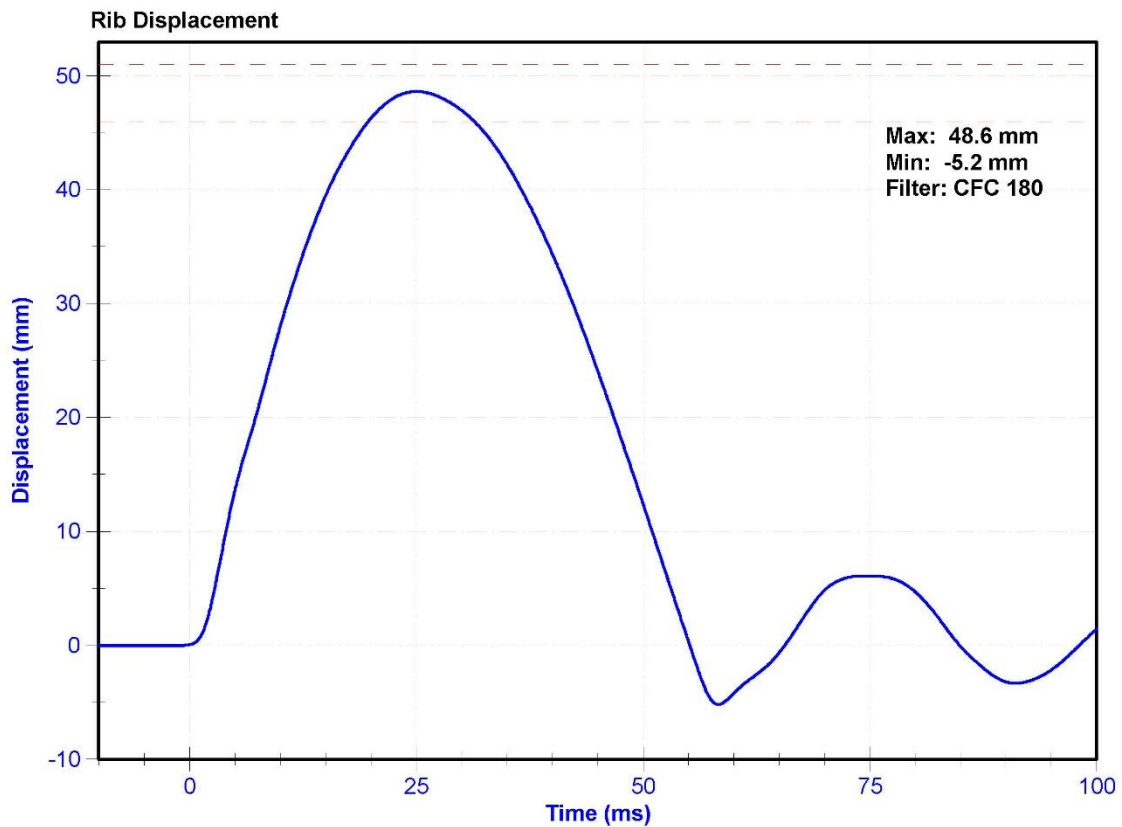


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.5	Pass
Humidity	10	70	%	45.0	Pass
Rib Displacement	36	40	mm	37.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-182GFE	10/19/2015	10/18/2016

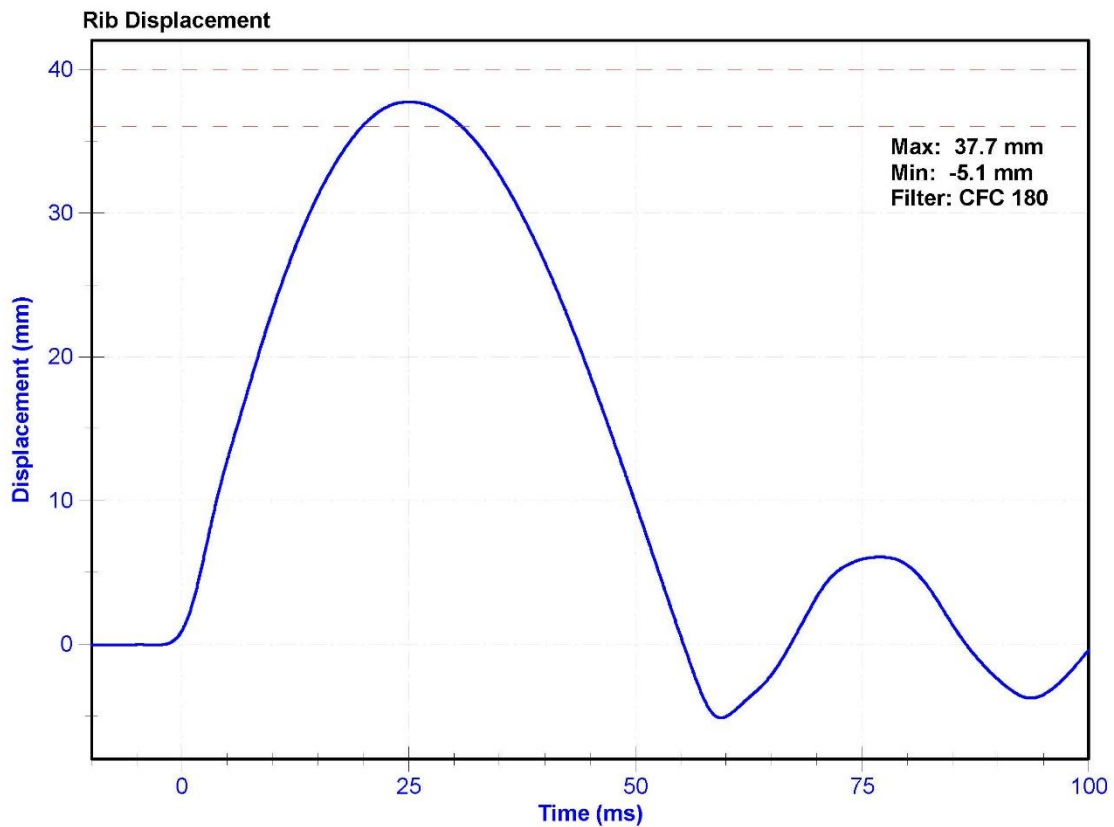


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.1	Pass
Humidity	10	70	%	58.4	Pass
Rib Displacement	46	51	mm	49.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Rib Potentiometer	Honeywell MLT-38000203	DS-182GFE	10/19/2015	10/18/2016

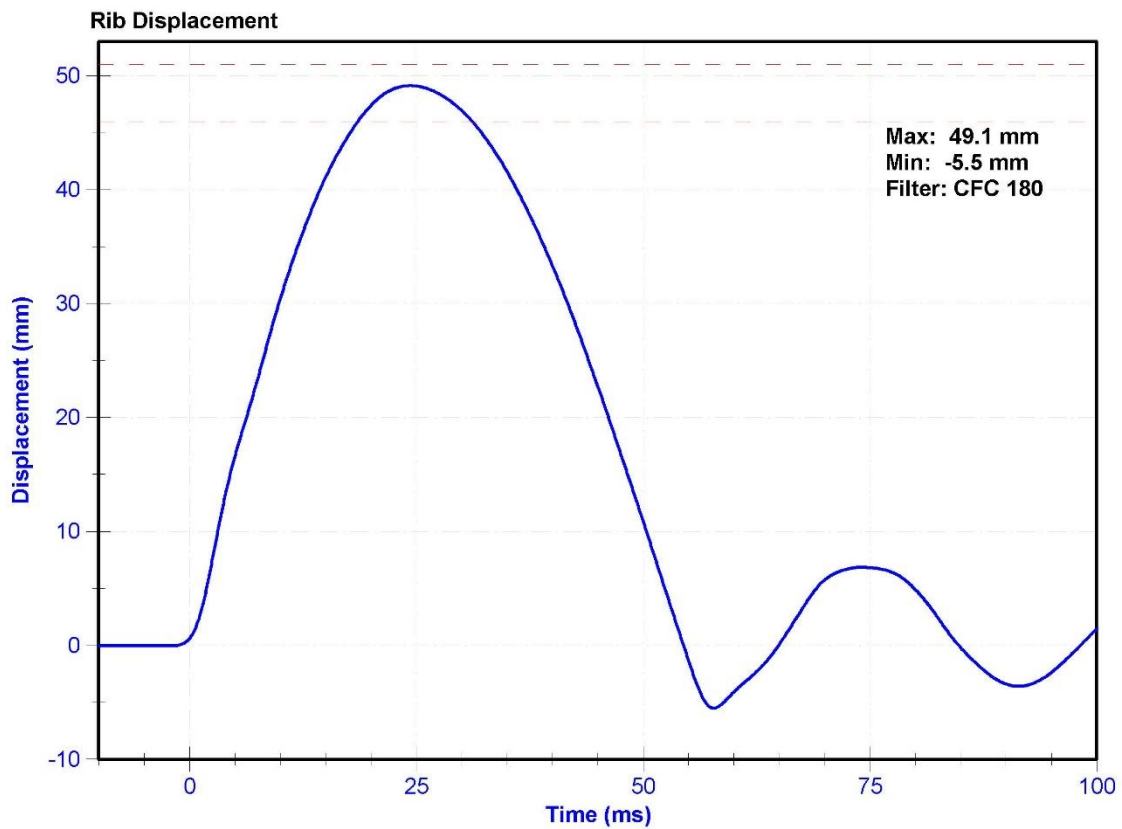


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle





Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.6	Pass
Humidity	10	70	%	40.6	Pass
Velocity	5.4	5.6	m/s	5.45	Pass
Resistive Force after 6ms	5,100	6,200	N	6115.6	Pass
Upper Thorax Rib Deflection	34	41	mm	37.1	Pass
Mid Thorax Rib Deflection	37	45	mm	41.1	Pass
Lower Thorax Rib Deflection	37	44	mm	40.3	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Probe Accelerometer	ENDEVCO 7231CT	AC-C14972	8/13/2015	2/11/2016
Upper Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-183GFE	10/19/2015	10/18/2016
Middle Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-184GFE	10/19/2015	10/18/2016
Lower Thorax Rib Potentiometer	Honeywell MLT-38000203	DS-182GFE	10/19/2015	10/18/2016

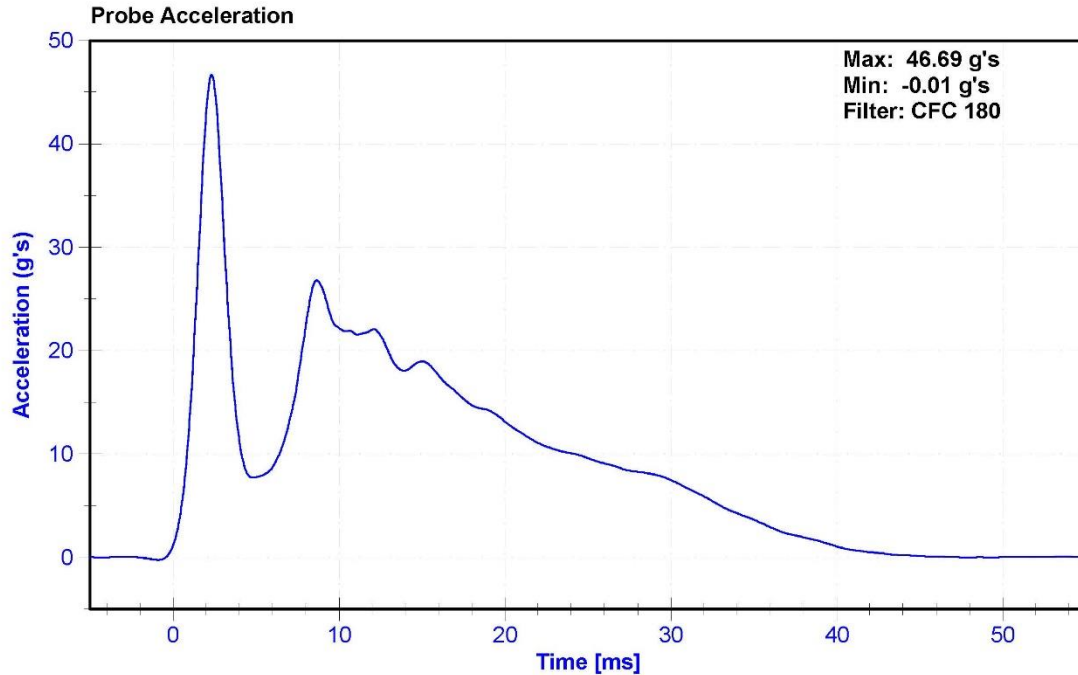

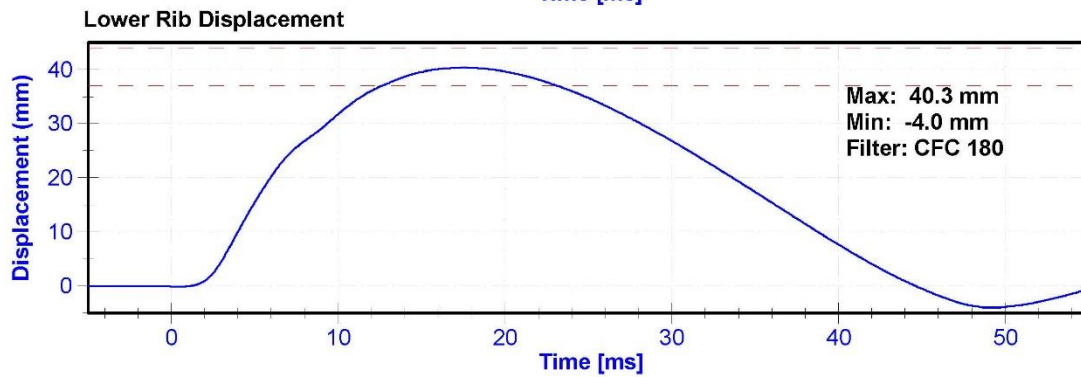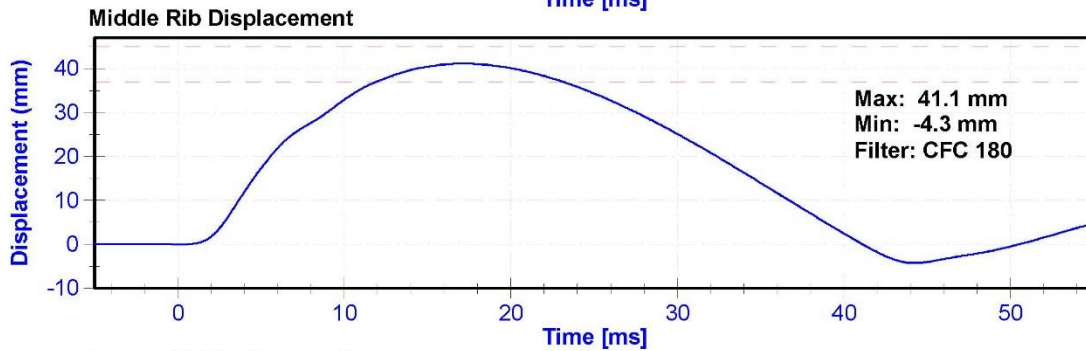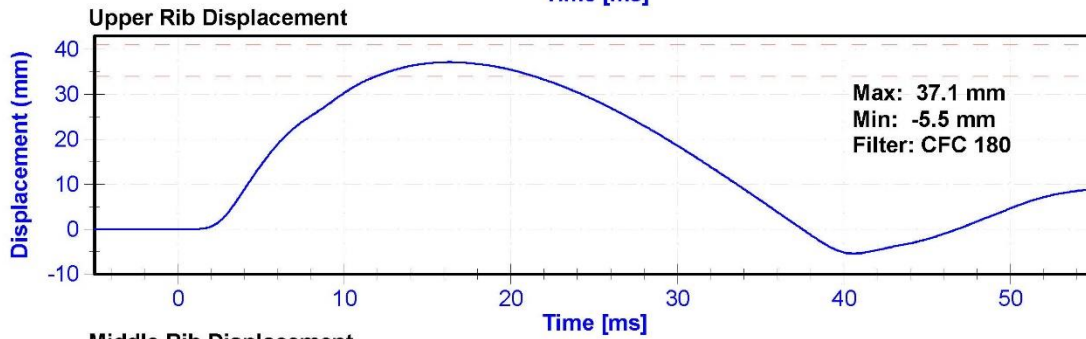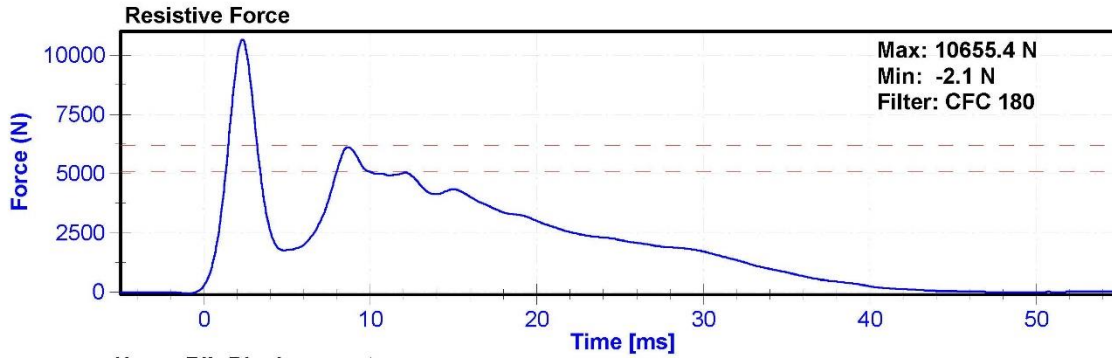


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle





Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.9	Pass
Humidity	10	70	%	37.8	Pass
Velocity	3.9	4.1	m/s	4.01	Pass
Combined Abdomen Force	2,200	2,700	N	2457.6	Pass
Time at Peak Abdomen Force	10.0	12.3	ms	11.35	Pass
Resistive Probe Force	4,000	4,800	N	4326.4	Pass
Time at Peak Resistive Force	10.6	13.0	ms	12.45	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C14972	8/13/2015	2/11/2016
Front Abdomen Load Cell	DENTON 2631	LC-1512	6/25/2015	6/24/2016
Middle Abdomen Load Cell	DENTON 2631	LC-1526	6/25/2015	6/24/2016
Rear Abdomen Load Cell	DENTON 2631	LC-1516	6/25/2015	6/24/2016

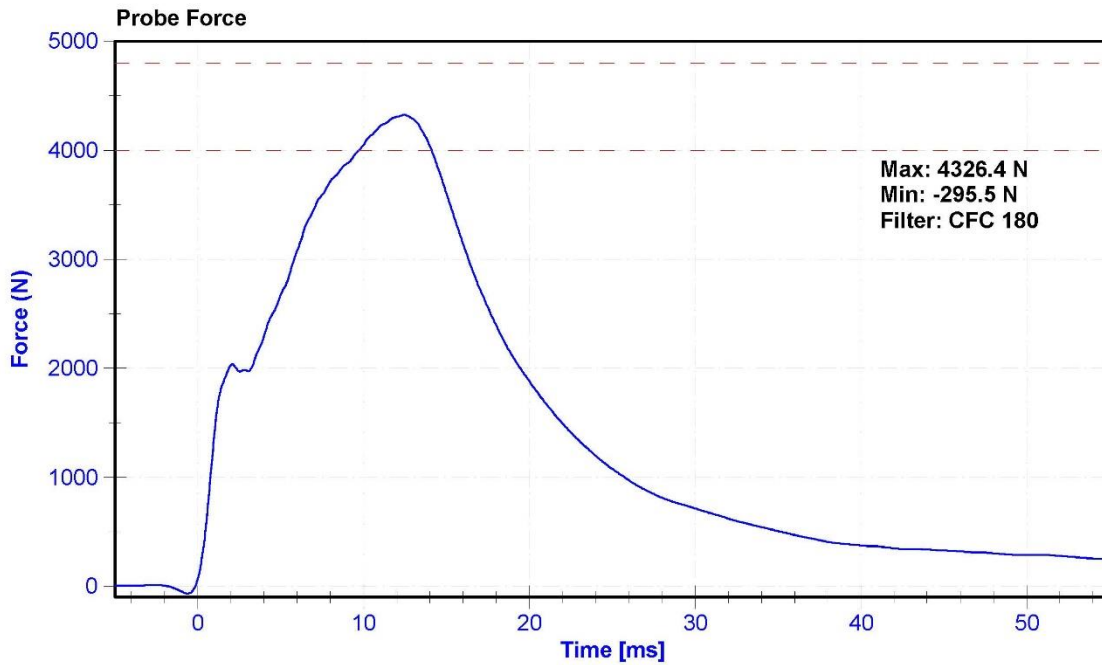

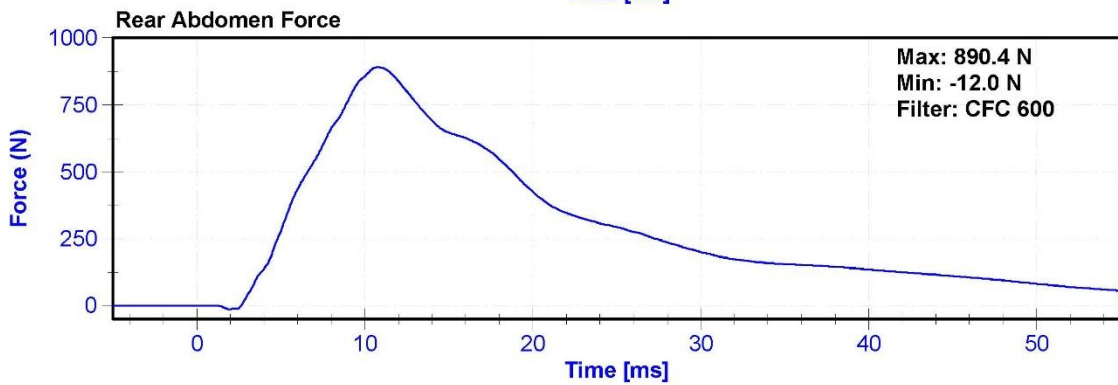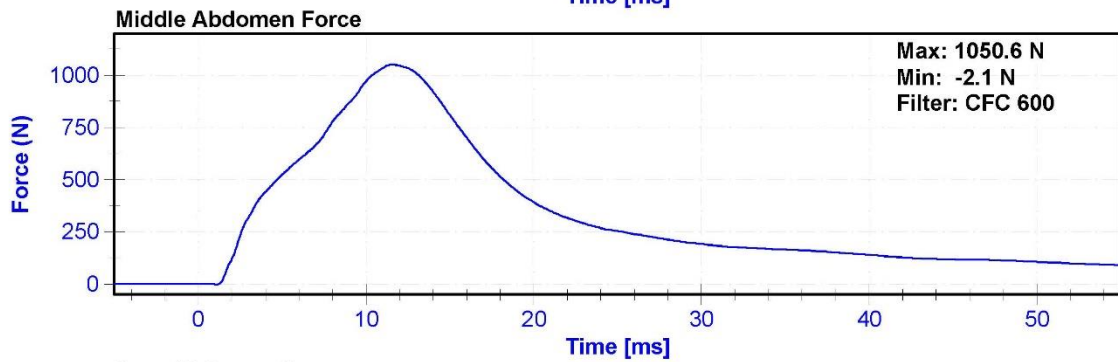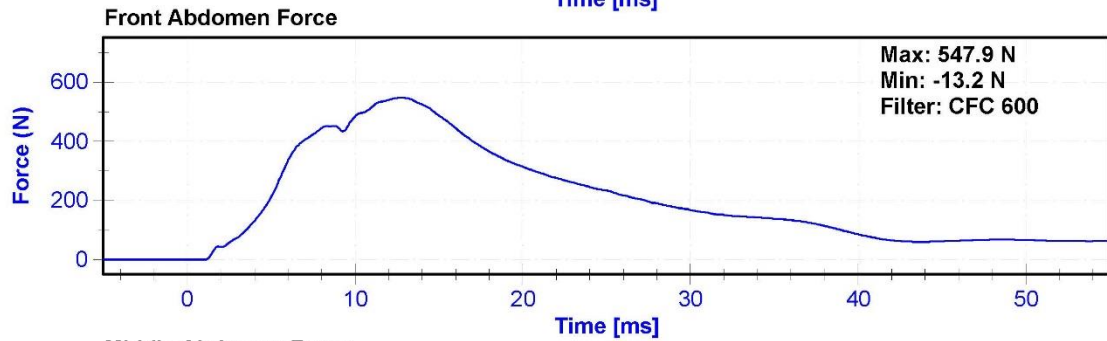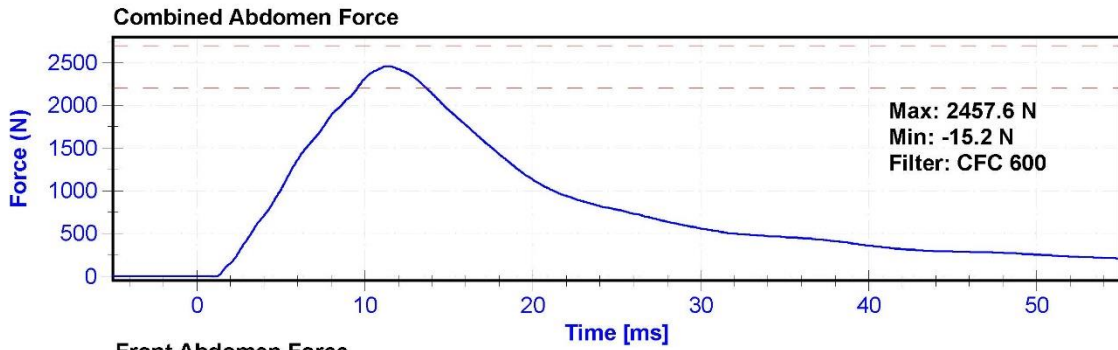



ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.2	Pass
Humidity	10	70	%	47.2	Pass
Velocity	5.95	6.15	m/s	6.068	Pass
Lateral Spine Rotation	45	55	deg	49.3	Pass
Time at Maximum Rotation	39	53	ms	46.6	Pass
Time of Decay to Zero Degrees	37	57	ms	37.1	Pass
Pulse within Corridor?	-	-	-	Yes	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5F3	5/7/2015	11/7/2015
Pendulum "A" Potentiometer	SP22G	DS-094	9/24/2015	9/23/2016
Condyle "B" Potentiometer	SP22G	DS-095	9/24/2015	9/23/2016

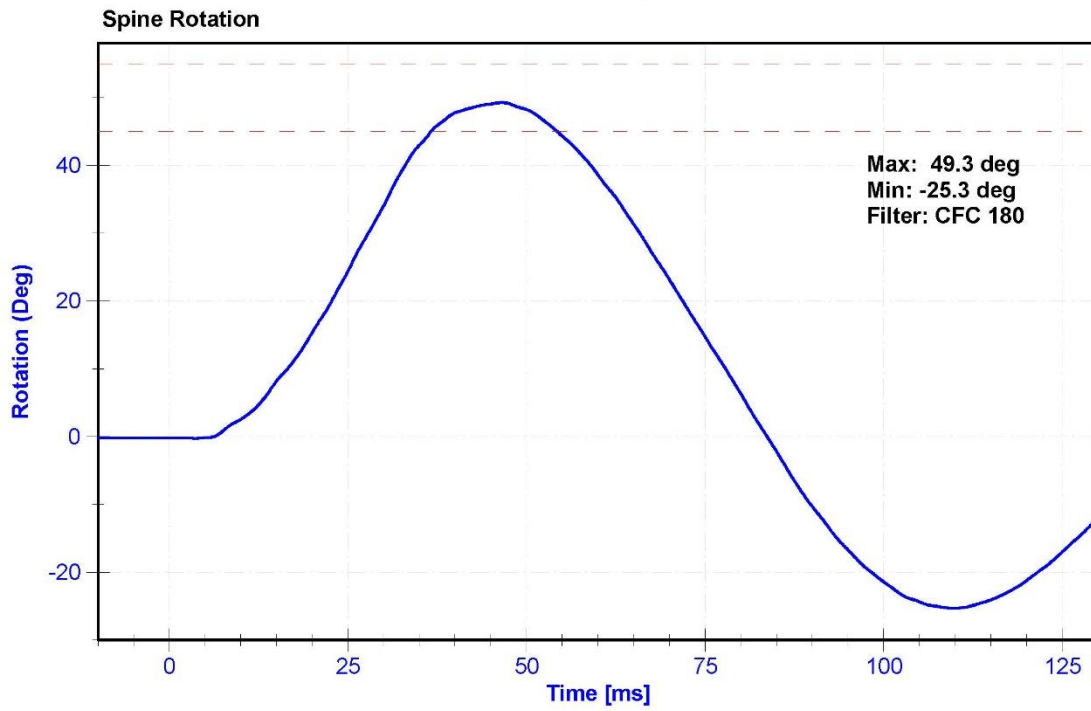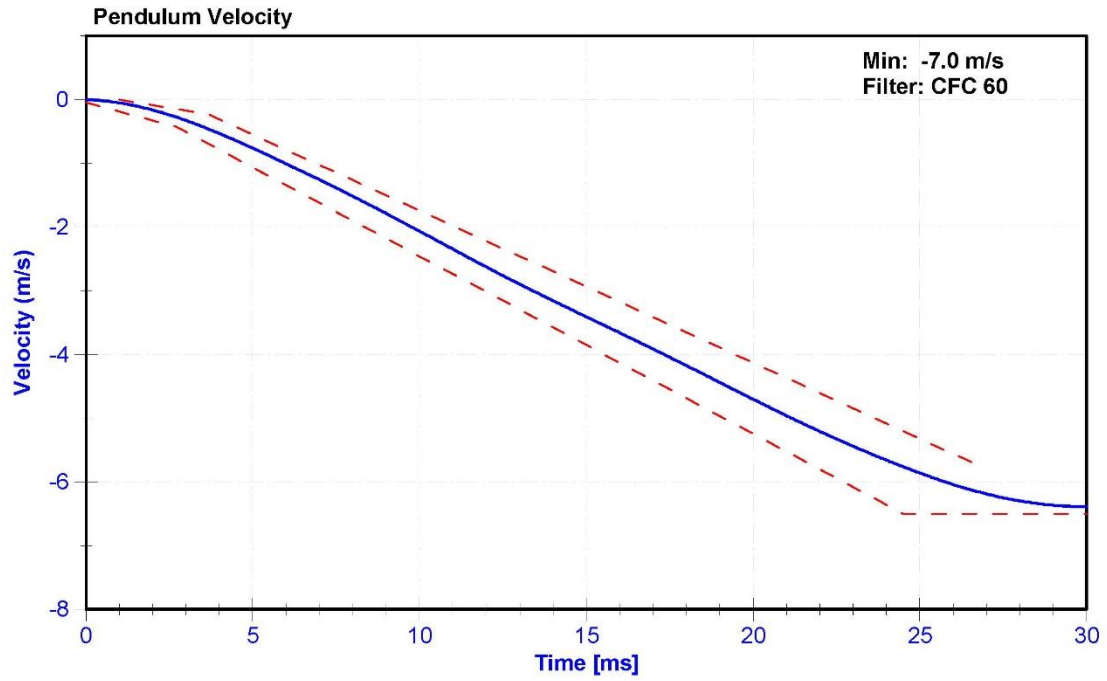

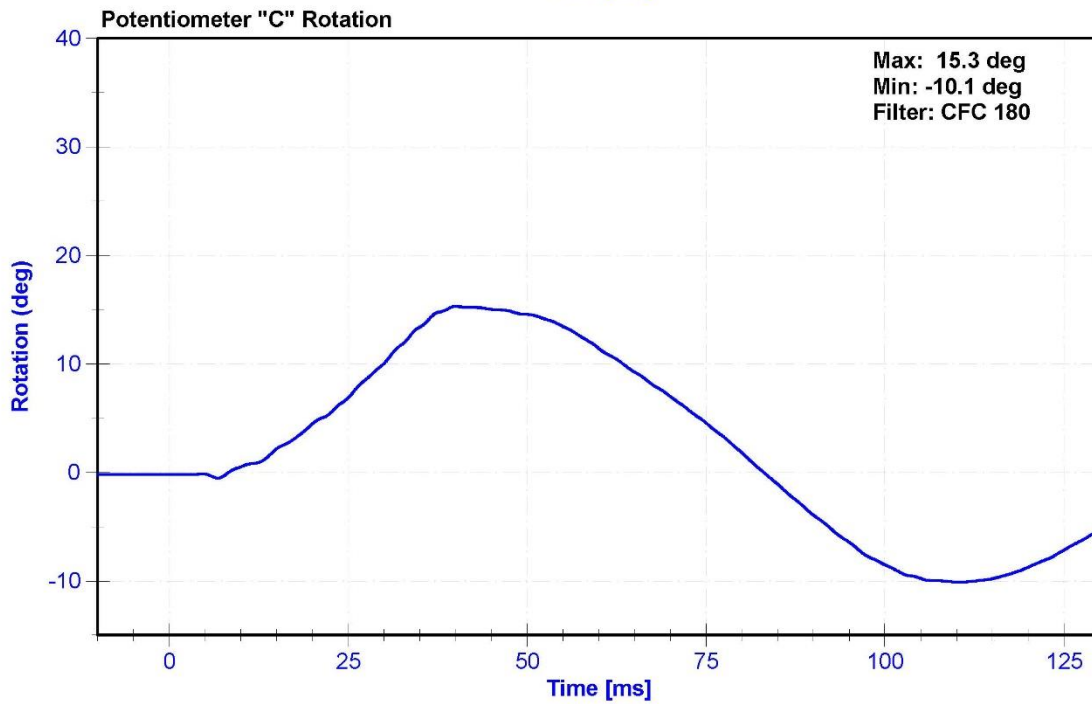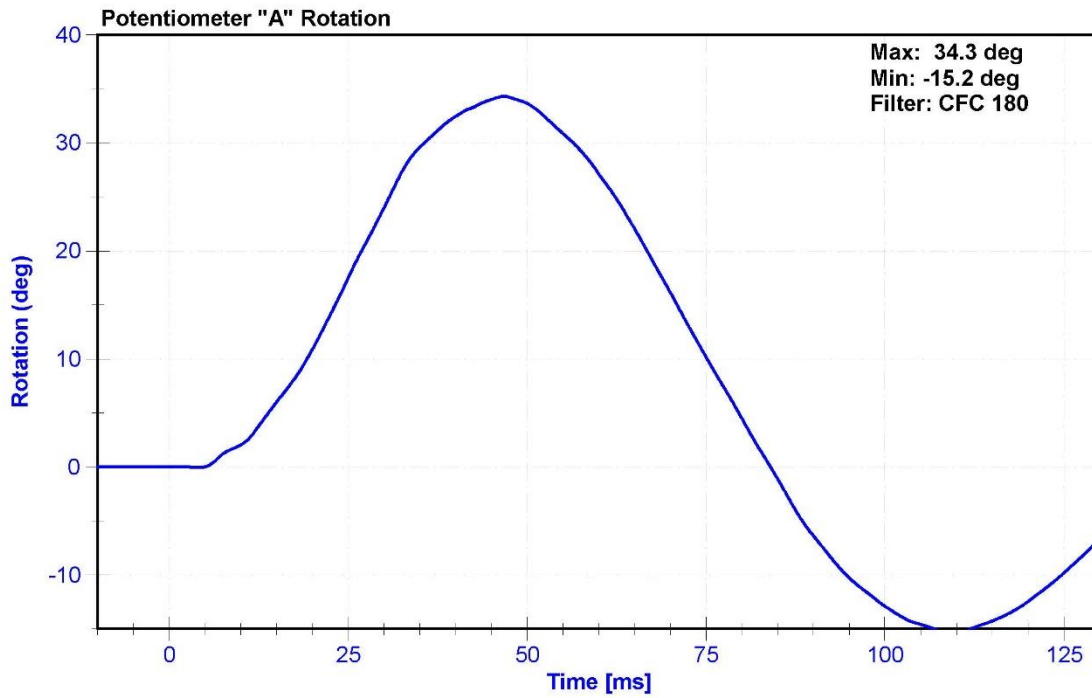


ATD Manufacturer	FTSS	Test Technician	M.Hartung
ATD Serial Number	F034	Laboratory Supervisor	M.Goehle



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	36.5	Pass
Velocity	4.2	4.4	m/s	4.30	Pass
Resistive Force	4,700	5,400	N	5028.2	Pass
Time at Peak Resistive Force	11.8	16.1	ms	13.10	Pass
Pubic Force	-1,590	-1,230	N	-1425.4	Pass
Time at Peak Pubic Force	12.2	17.0	ms	13.60	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C14972	8/13/2015	2/11/2016
Pubic Load Cell	Denton 3096JFL	LC-465Fy	6/25/2015	6/24/2016

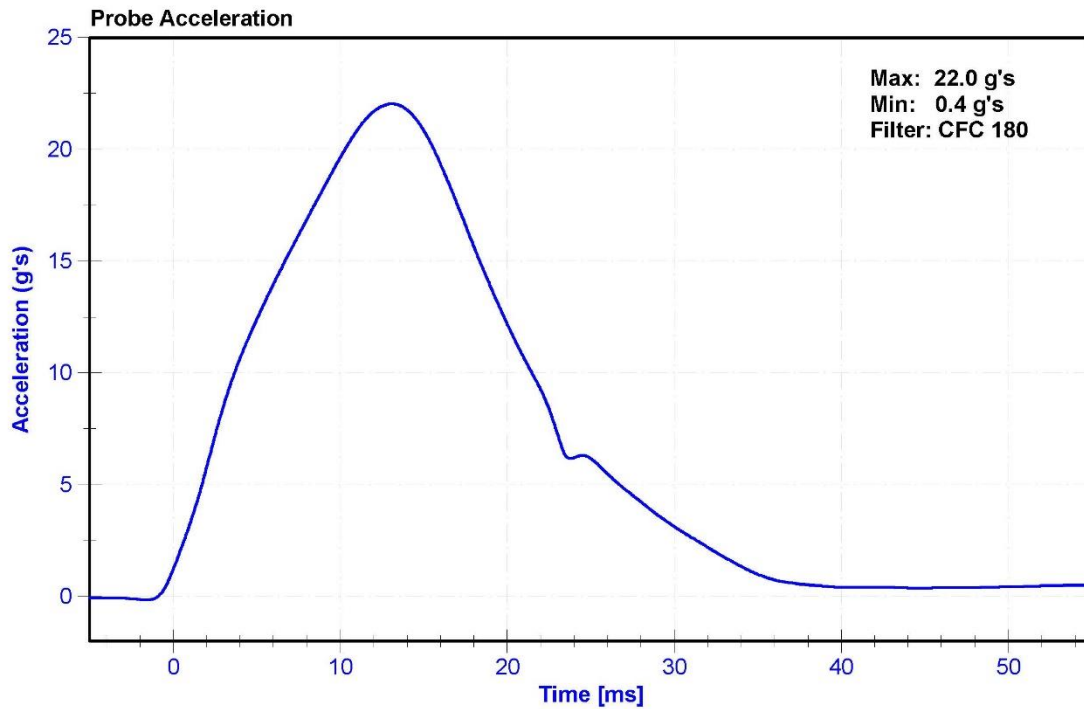

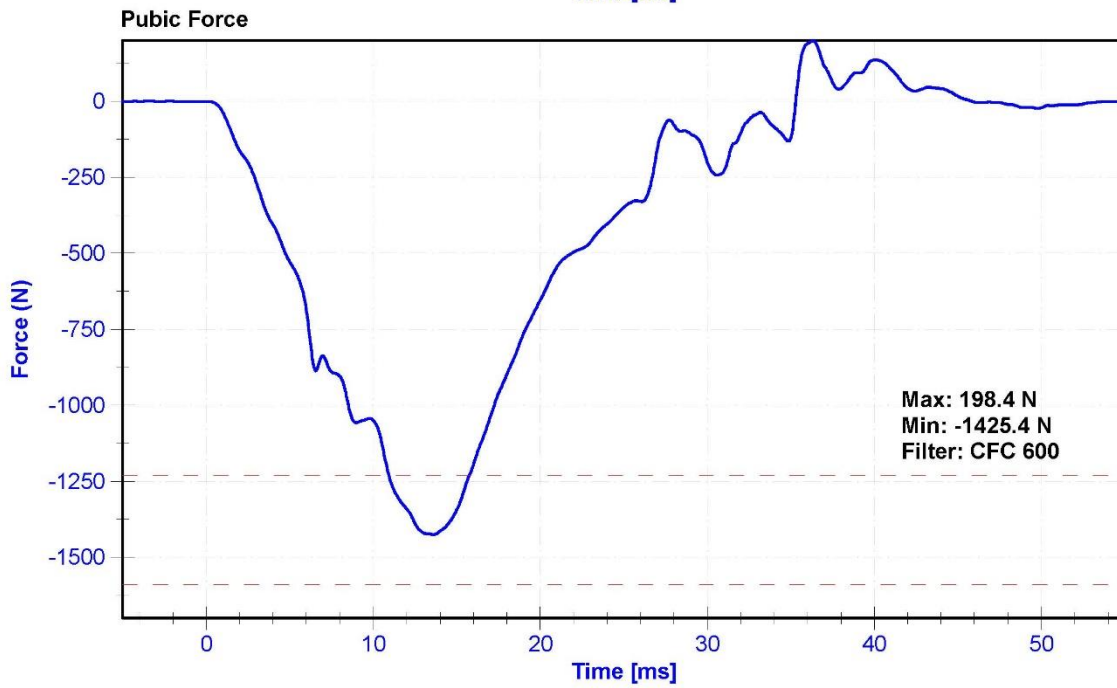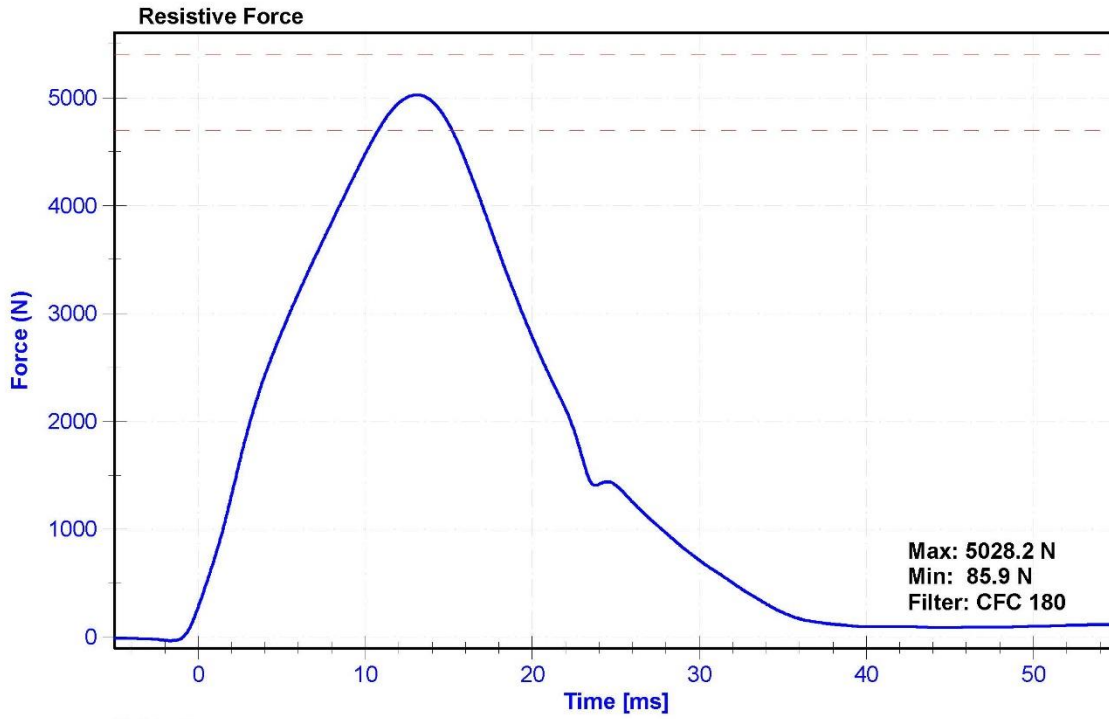

CALIBRATION TEST RESULTS

POST-TEST

SID-IIS 5TH PERCENTILE FEMALE - PASSENGER ATD

SERIAL No: 303

(CONFIGURED FOR LEFT SIDE IMPACT)




External Measurements - SID-IIs

Technician: M. Geesey

Date: 10/28/2015

Dummy Serial Number: 303

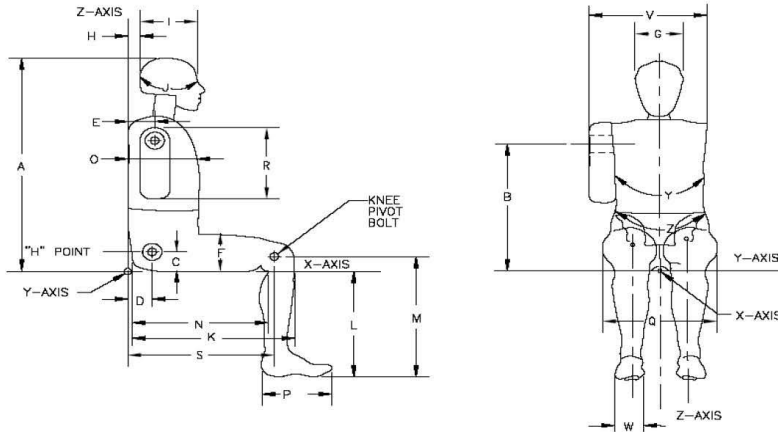

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	772	788	780	Pass
B	Shoulder Pivot Height	437	453	446	Pass
C	H-point Height	79	89	85	Pass
D	H-point from seatback	141	151	146	Pass
E	Shoulder Pivot from Backline	97	107	103	Pass
F	Thigh Clearance	119	135	130	Pass
G	Head Breadth	140	148	144	Pass
H	Head Back from Backline	40	46	43	Pass
I	Head Depth	178	188	182	Pass
J	Head Circumference	541	551	546	Pass
K	Buttock to Knee Length	514	540	530	Pass
L	Popliteal Height	343	369	356	Pass
M	Knee Pivot to floor height	392	409	405	Pass
N	Buttock Popliteal Length	416	442	437	Pass
O	Chest Depth w/o jacket	195	211	204	Pass
P	Foot Length	216	232	221	Pass
Q	Hip Breadth (w/pelvic plugs)	313	323	317	Pass
R	Arm Length	249	259	254	Pass
S	Knee Joint to seatback	477	493	486	Pass
V	Shoulder Width	341	357	351	Pass
W	Foot Width	78	94	85	Pass
Y	Chest Circumference w/jacket	851	881	870	Pass
Z	Waist Circumference	761	791	770	Pass


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	303	Laboratory Supervisor	M. Goehle




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	22.2	Pass
Humidity	10	70	%	28.1	Pass
Resultant Acceleration	115	137	g's	127.5	Pass
Oscillation	0	15	%	2.5	Pass
Fore-Aft Acceleration	-15	15	g's	6.2	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264	AC-P83420	10/16/2015	4/15/2016
Y Accelerometer	ENDEVCO 7264	AC-P52040	10/14/2015	4/13/2016
Z Accelerometer	ENDEVCO 7264CT	AC-P58737	10/14/2015	4/13/2016

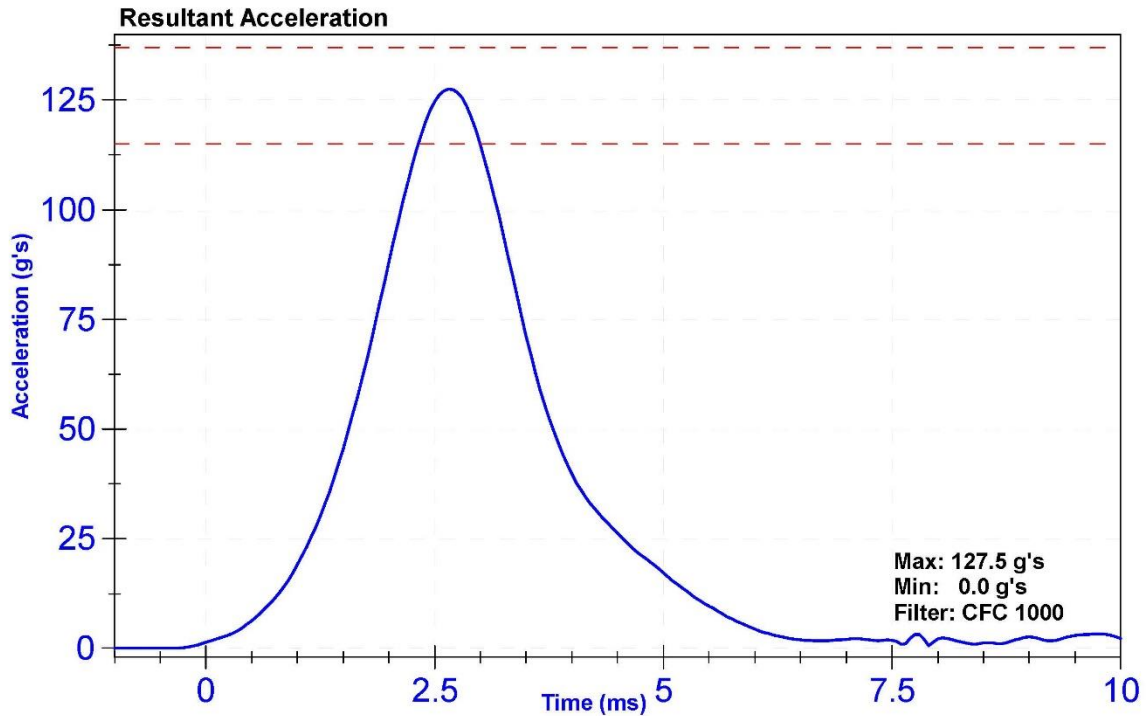

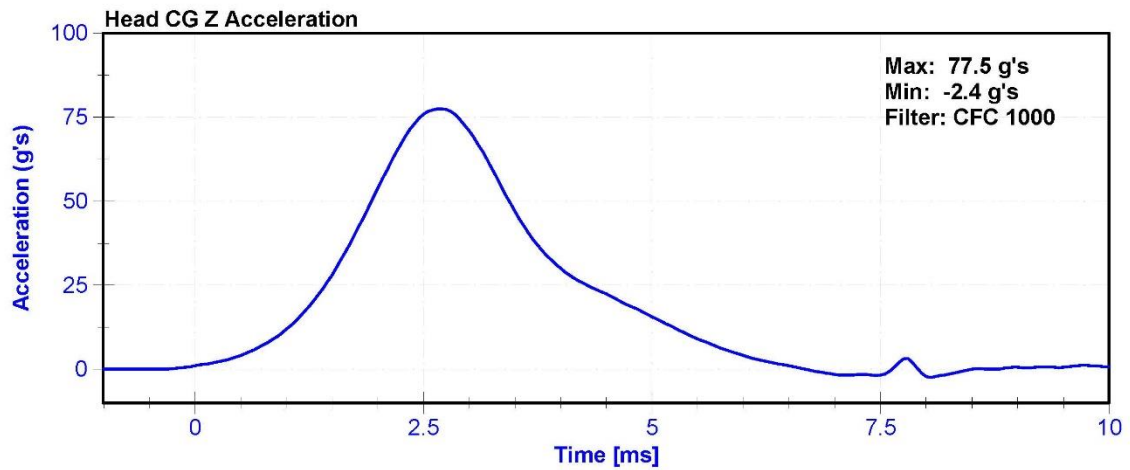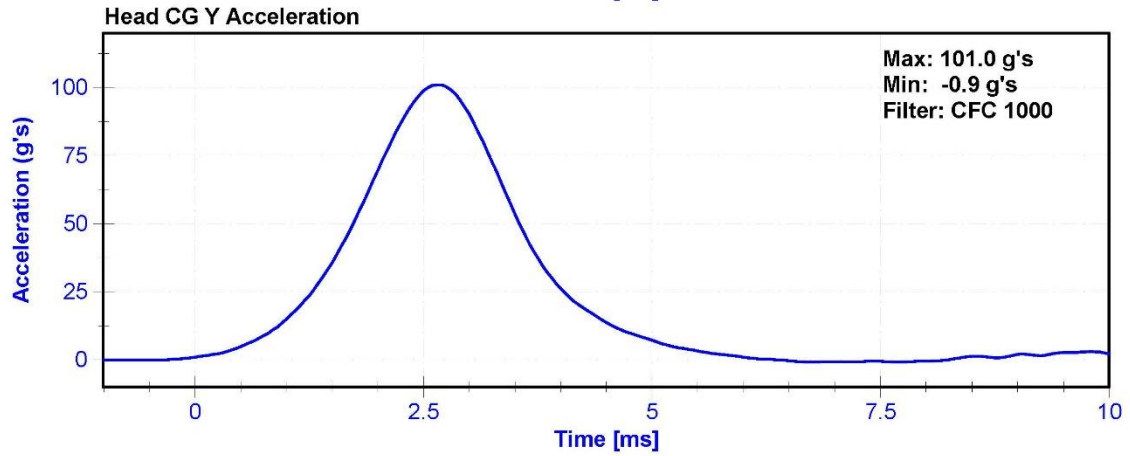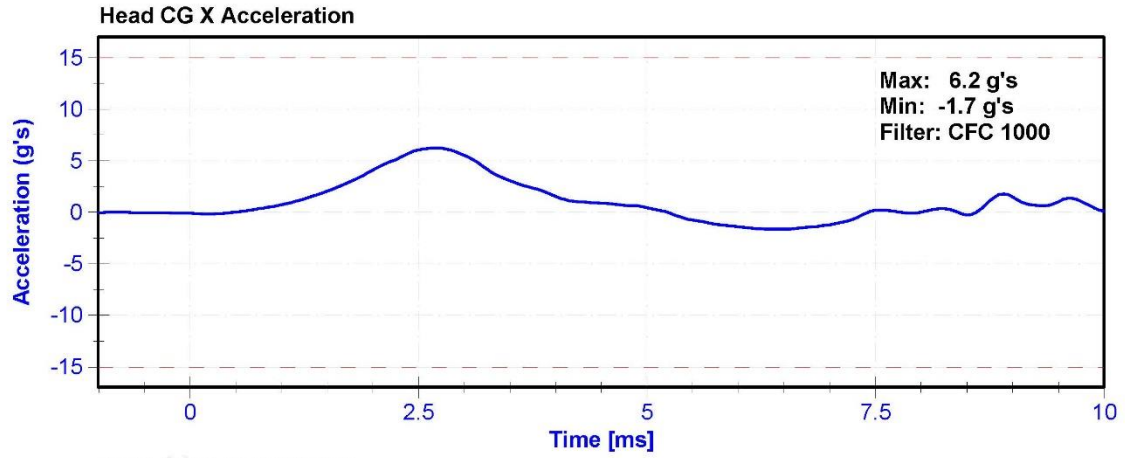


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	303	Laboratory Supervisor	M. Goehle



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	29.6	Pass
Velocity	4.2	4.4	m/s	4.35	Pass
Probe Acceleration	13	18	g's	15.8	Pass
Shoulder Deflection	28	37	mm	32.4	Pass
Lateral Upper Spine Acceleration	17	22	g's	20.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C14972	8/13/2015	2/11/2016
Shoulder Potentiometer	Servo 08TC1-3725	DS-008GFE	10/19/2015	10/18/2016
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P63315	10/19/2015	4/18/2016

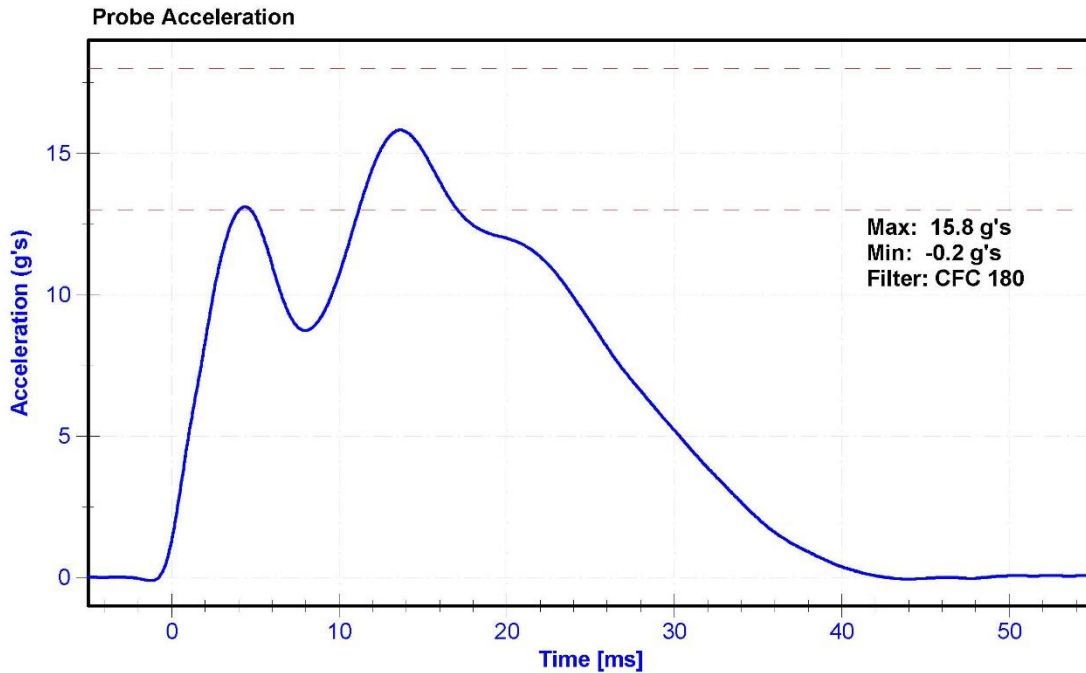

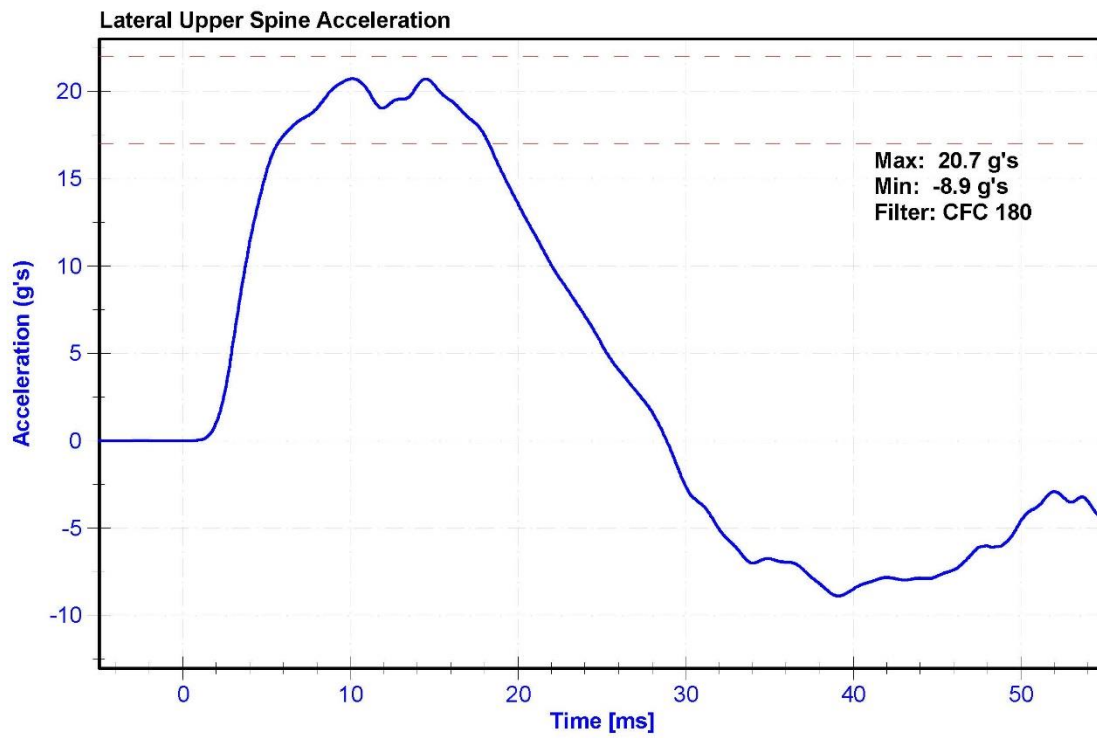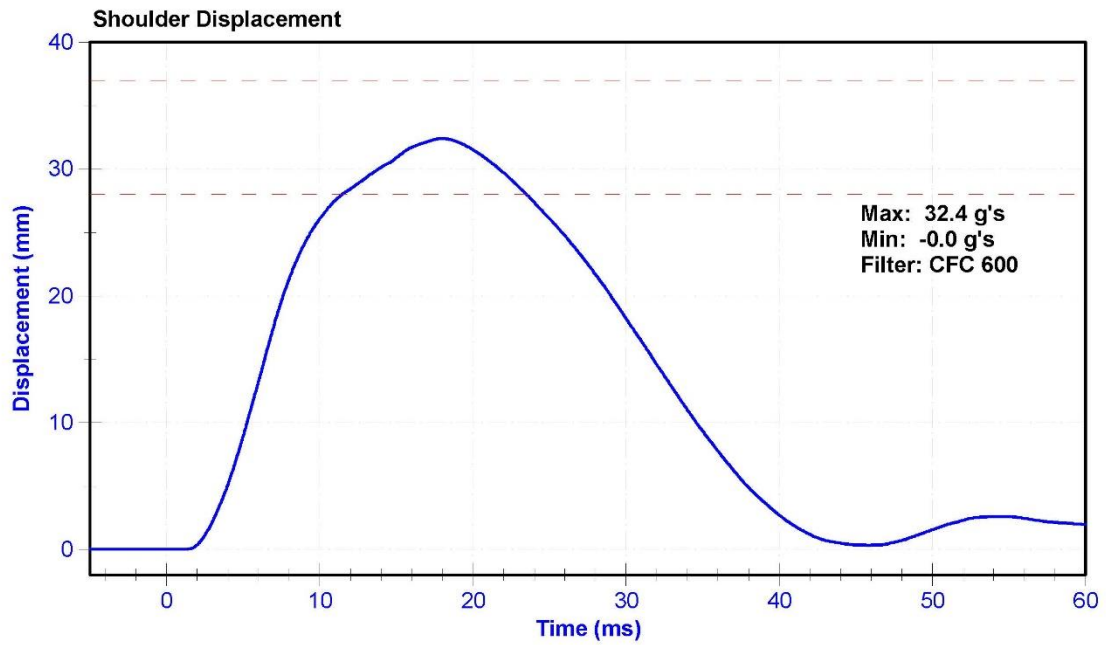


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	303	Laboratory Supervisor	M. Goehle



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.9	Pass
Humidity	10	70	%	40.2	Pass
Velocity	5.51	5.63	m/s	5.583	Pass
Pendulum Impulse at 10ms	2.2	2.8	m/s	2.25	Pass
Pendulum Impulse at 15ms	3.3	4.1	m/s	3.34	Pass
Pendulum Impulse at 20ms	4.4	5.4	m/s	4.58	Pass
Pendulum Impulse at 25ms	5.4	6.1	m/s	5.54	Pass
Pendulum Impulse from 25 to 100ms	5.5	6.2	m/s	5.87	Pass
Neck Rotation	71	81	deg	78.7	Pass
Time at Maximum Rotation	50	70	ms	65.2	Pass
Moment about the OC	36	44	Nm	40.8	Pass
Moment Decay to 0 Nm	102	126	ms	120.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5F3	5/7/2015	11/7/2015
Pendulum Potentiometer	Denton 78051-342	DS-184Pend	9/24/2015	9/23/2016
Condyle Potentiometer	Denton 78051-342	DS-185Pend	9/25/2015	9/24/2016
Upper Neck Load Cell	Denton 1716A	LC-2019Fy	6/29/2015	6/28/2016

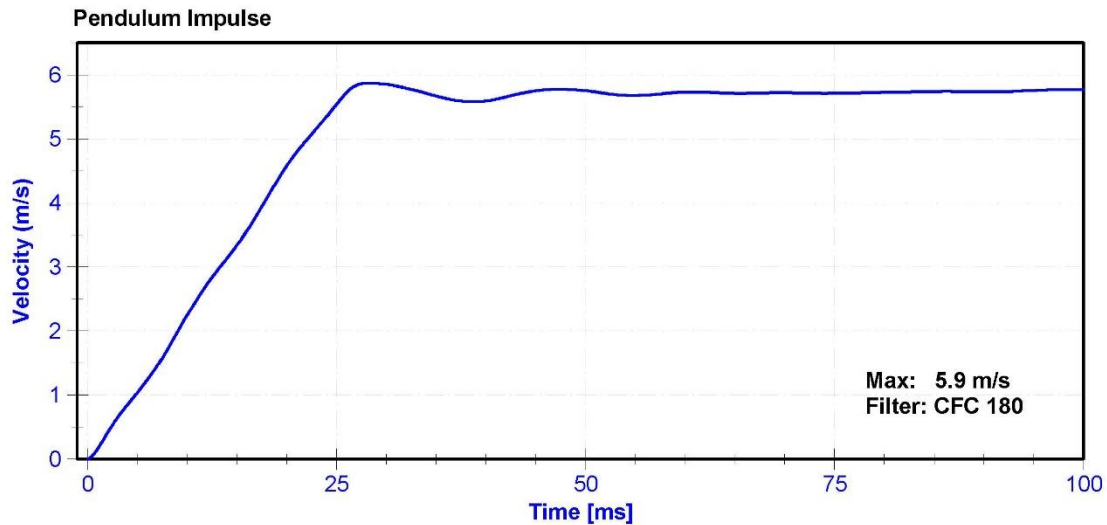

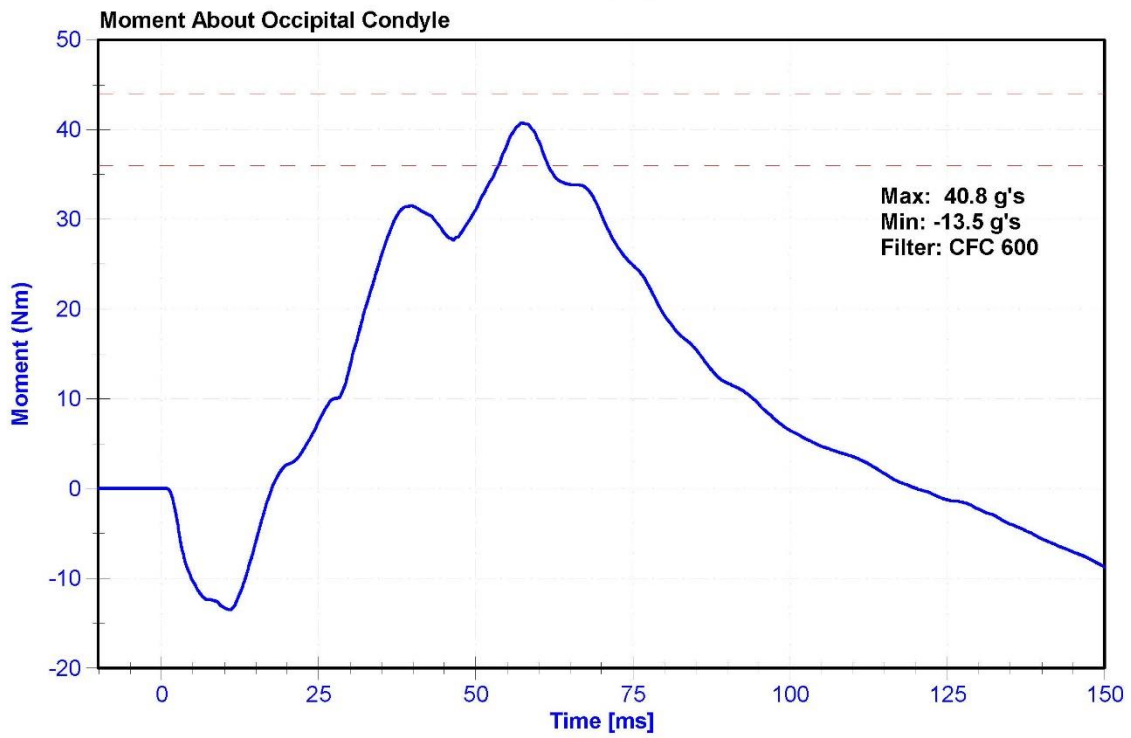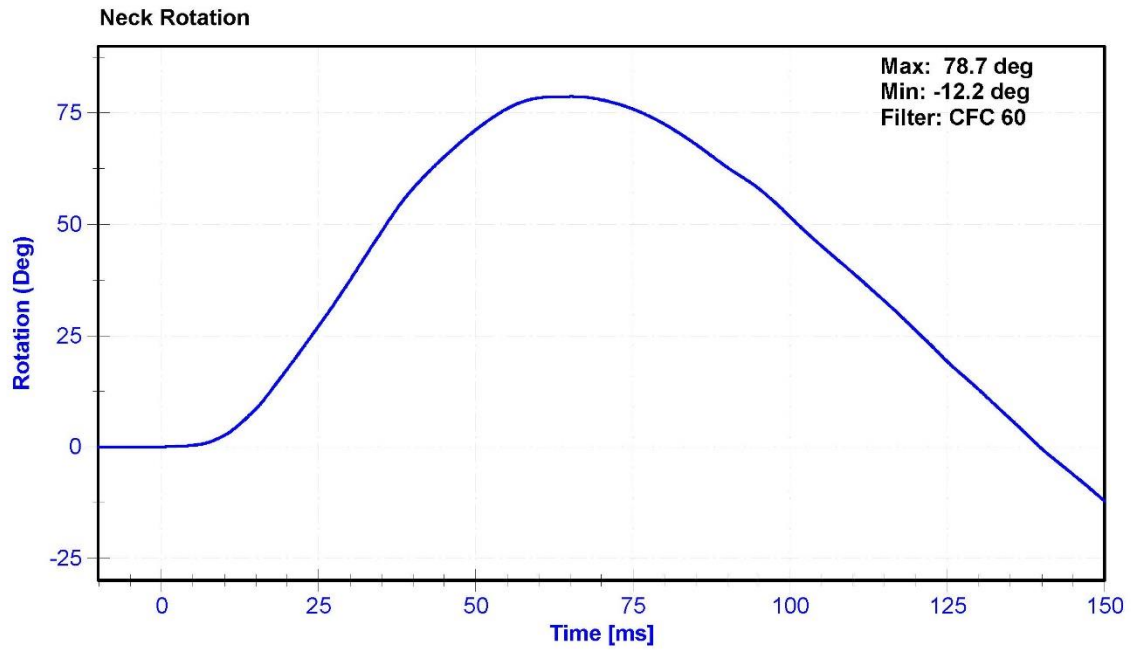


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	303	Laboratory Supervisor	M. Goehle




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	29.4	Pass
Velocity	4.2	4.4	m/s	4.35	Pass
Probe Acceleration	14	18	g's	16.3	Pass
Lateral Upper Spine Acceleration	13	17	g's	16.4	Pass
Lateral Lower Spine Acceleration	7	11	g's	9.8	Pass
Upper Thorax Rib Deflection	32	40	mm	37.3	Pass
Middle Thorax Rib Deflection	39	45	mm	42.8	Pass
Lower Thorax Rib Deflection	35	43	mm	40.1	Pass


Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C14972	8/13/2015	2/11/2016
Upper Spine Y Accelerometer	ENDEVCO 7264CT	AC-P63315	10/19/2015	4/18/2016
Lower Spine Y Accelerometer	ENDEVCO 7264CT	AC-P51974	10/19/2015	4/18/2016
Upper Thorax Rib Potentiometer	Servo 08CT1-3725	DS-1199GFE	10/19/2015	10/18/2016
Middle Thorax Rib Potentiometer	Servo 08CT1-3725	DS-1246GFE	10/19/2015	10/18/2016
Lower Thorax Rib Potentiometer	Servo 08CT1-3725	DS-1256GFE	10/19/2015	10/18/2016

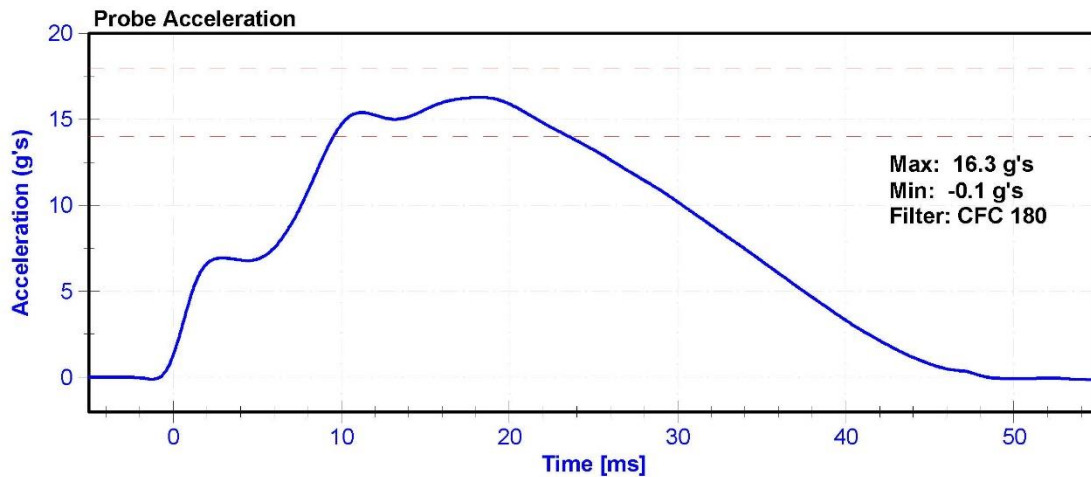


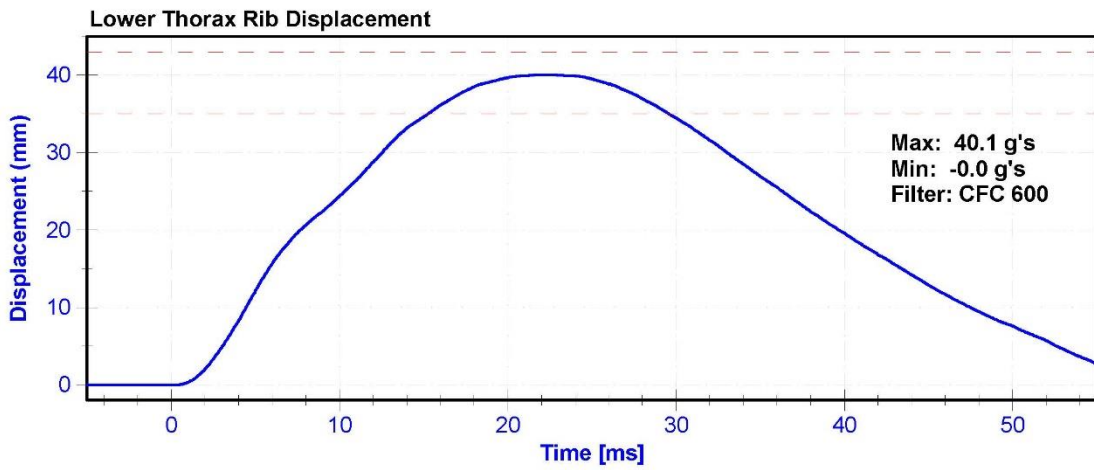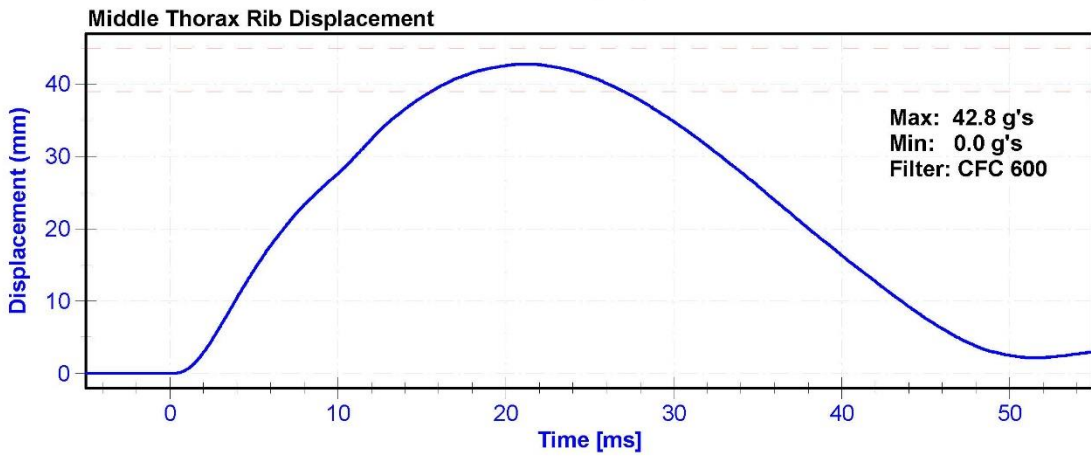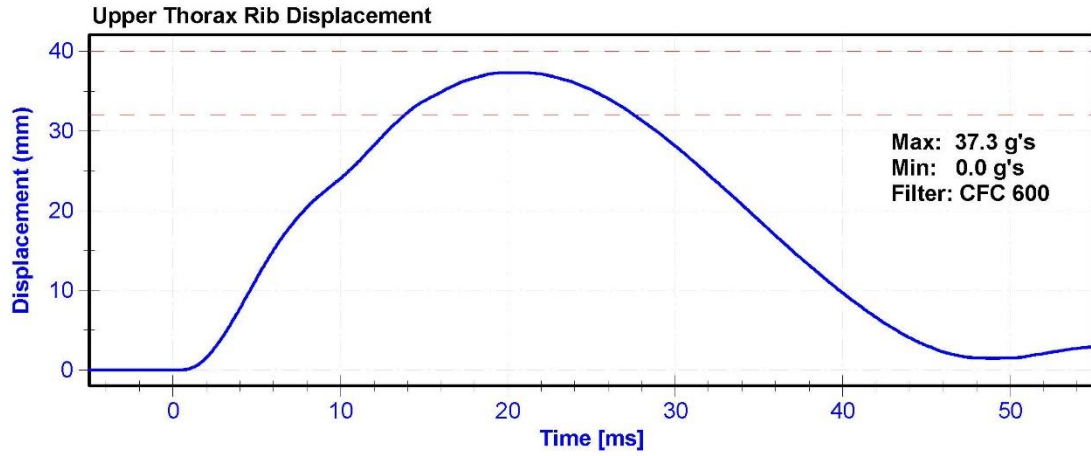

Lateral Upper Spine Acceleration

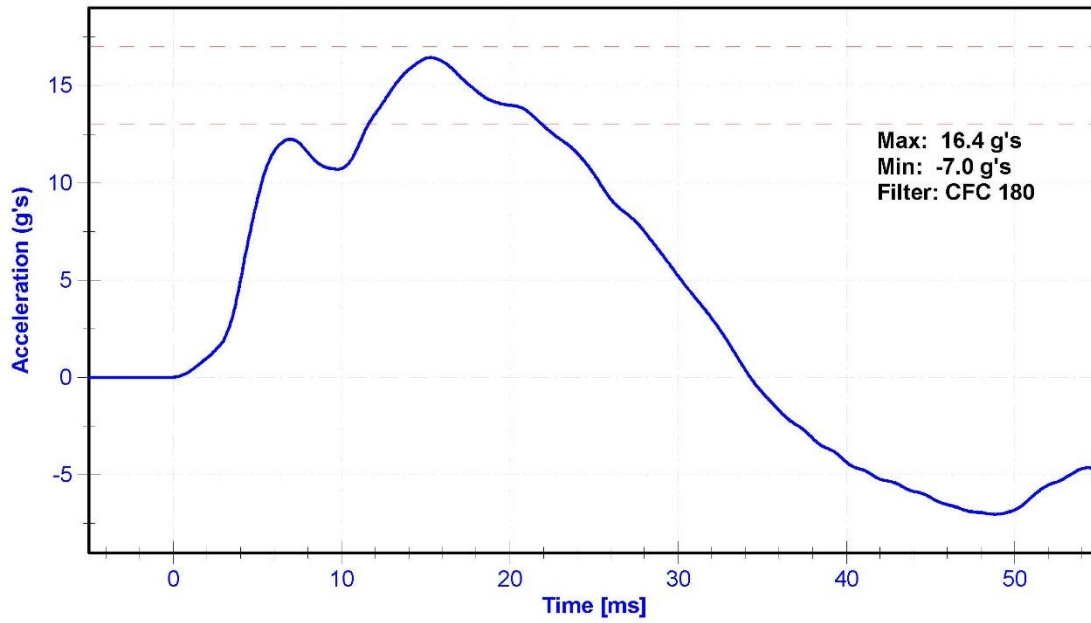

Lateral Lower Spine Acceleration

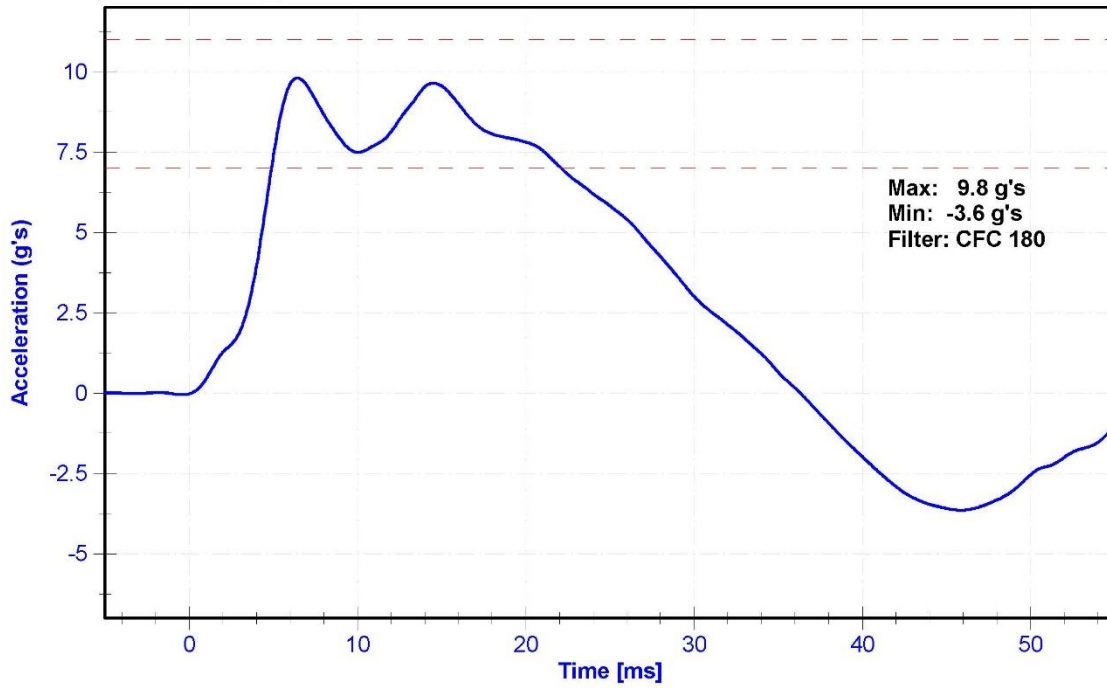


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	303	Laboratory Supervisor	M. Goehle





Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	26.9	Pass
Velocity	6.6	6.8	m/s	6.70	Pass
Probe Acceleration after 5 ms	30	36	g's	35.0	Pass
Lateral Upper Spine Acceleration	34	43	g's	42.4	Pass
Lateral Lower Spine Acceleration	29	37	g's	36.7	Pass
Shoulder Deflection	31	40	mm	37.5	Pass
Upper Thorax Rib Deflection	25	32	mm	27.8	Pass
Mid Thorax Rib Deflection	30	36	mm	31.2	Pass
Lower Thorax Rib Deflection	32	38	mm	32.4	Pass


Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C14972	8/13/2015	2/11/2016
Upper Spine T1 Y Accelerometer	ENDEVCO 7264CT	AC-P63315	10/19/2015	4/18/2016
Upper Spine T12 Y Accelerometer	ENDEVCO 7264CT	AC-P51974	10/19/2015	4/18/2016
Shoulder Potentiometer	Servo 08TC1-3725	DS-008GFE	10/19/2015	10/18/2016
Upper Thorax Rib Potentiometer	Servo 08CT1-3725	DS-1199GFE	10/19/2015	10/18/2016
Middle Thorax Rib Potentiometer	Servo 08CT1-3725	DS-1246GFE	10/19/2015	10/18/2016
Lower Thorax Rib Potentiometer	Servo 08CT1-3725	DS-1256GFE	10/19/2015	10/18/2016

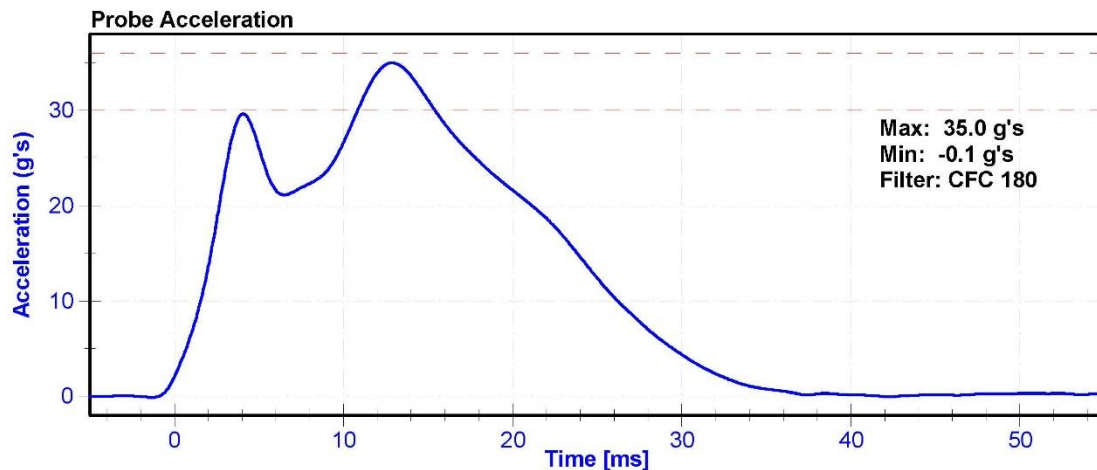


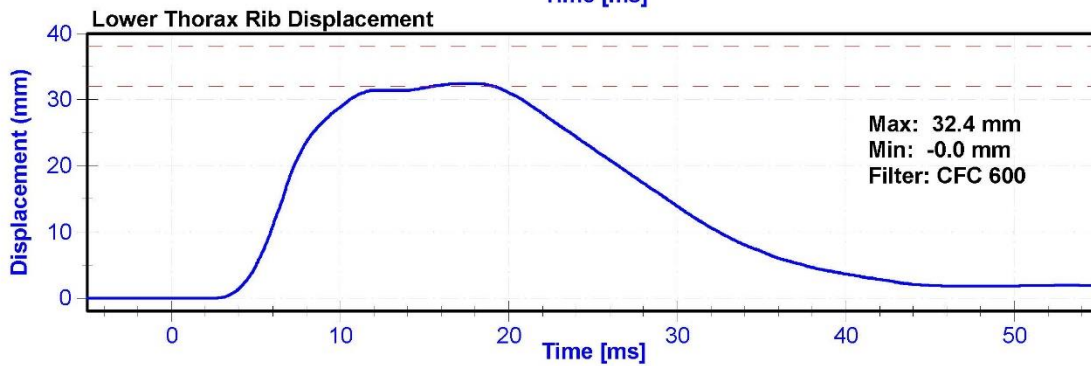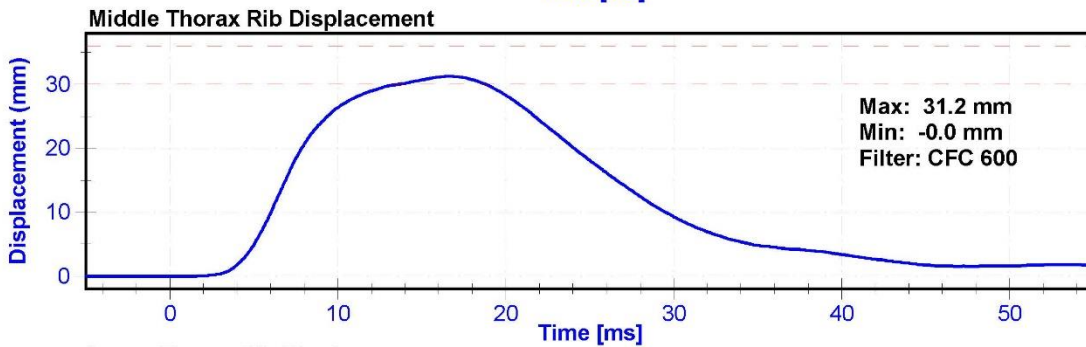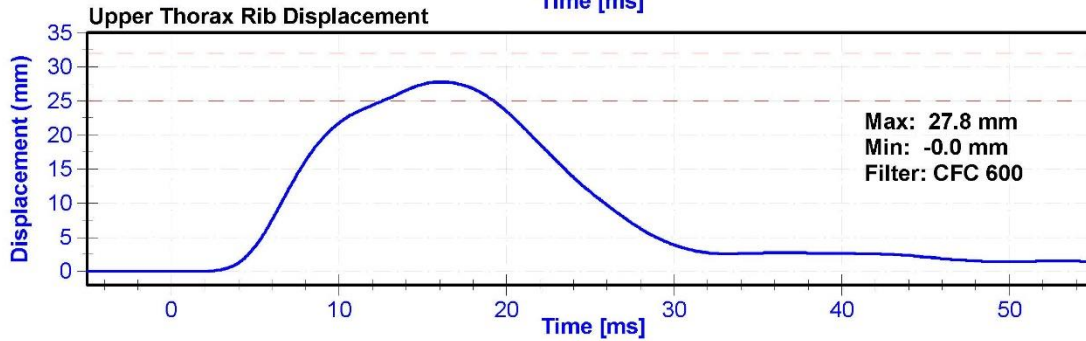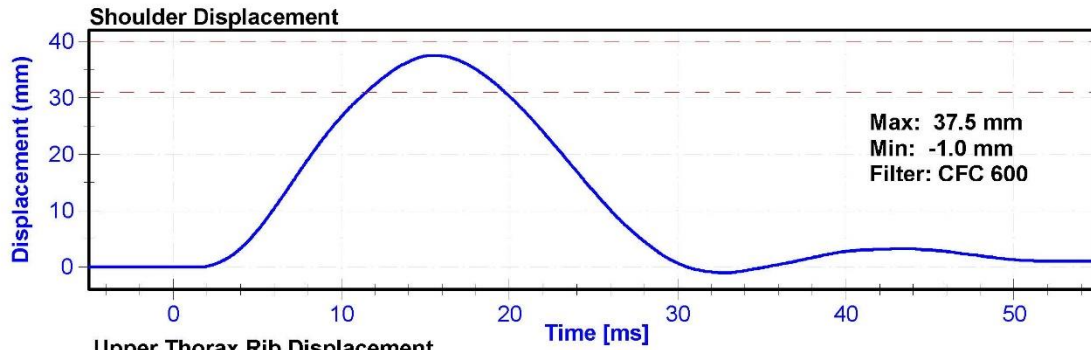

Lateral Upper Spine Acceleration

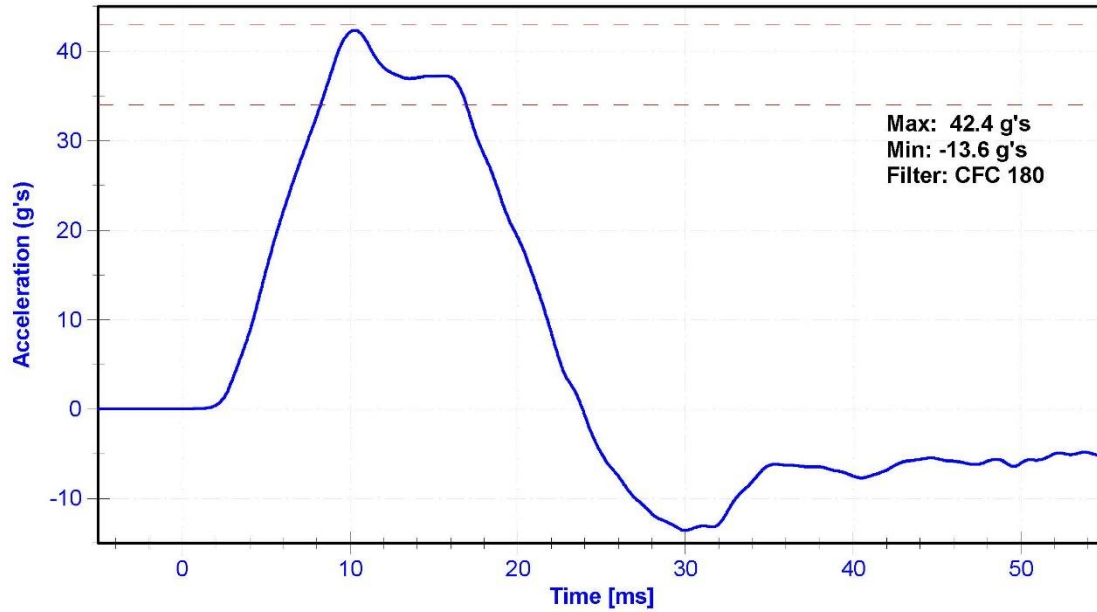

Lateral Lower Spine Acceleration

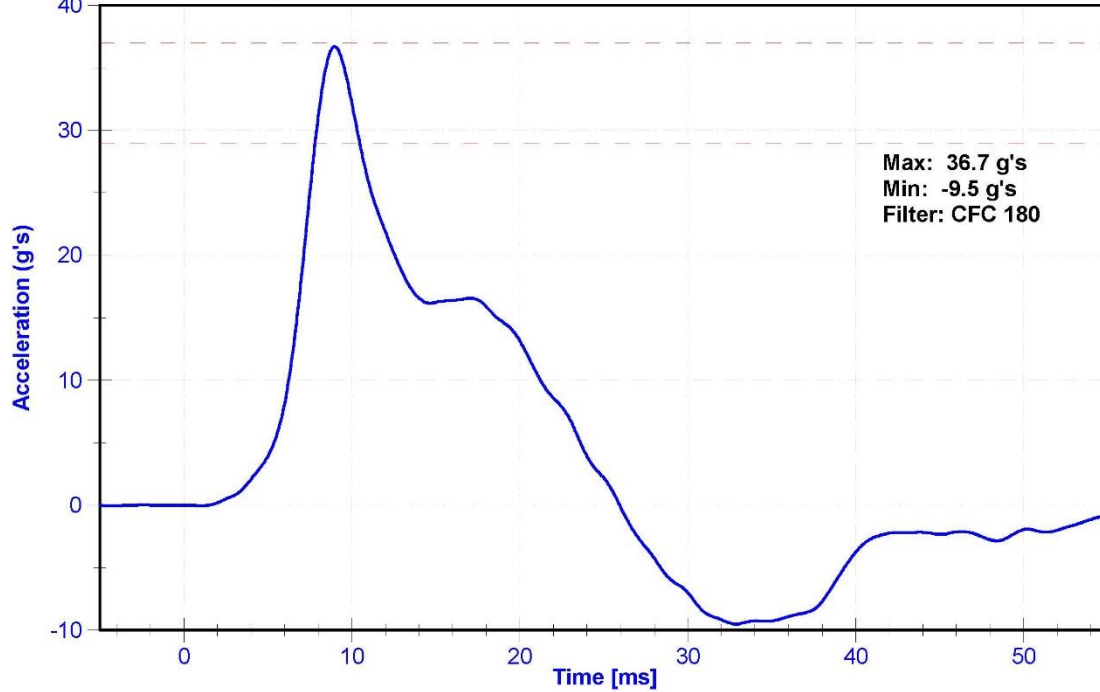


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	303	Laboratory Supervisor	M. Goehle



Results


Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.1	Pass
Humidity	10	70	%	29.1	Pass
Velocity	4.2	4.4	m/s	4.35	Pass
Probe Acceleration	12	16	g's	15.4	Pass
Lateral Lower Spine Acceleration	9	14	g's	11.3	Pass
Upper Abdomen Rib Deflection	36	47	mm	40.5	Pass
Lower Abdomen Rib Deflection	33	44	mm	38.4	Pass

Transducer Calibrations


Channel	Manufacturer	Serial Number	Calibratio Date	Calibration Due Date
Probe Accelerometer	ENDEVCO 7231CT	AC-C14972	8/13/2015	2/11/2016
Lower Spine Y Accelerometer	ENDEVCO 7264CT	AC-P51974	10/19/2015	4/18/2016
Upper Abdomen Rib Potentiometer	Servo 08CT1-3725	DS-1274GFE	10/19/2015	10/18/2016
Lower Abdomen Rib Potentiometer	Servo 08CT1-3725	DS-1285GFE	10/19/2015	10/18/2016

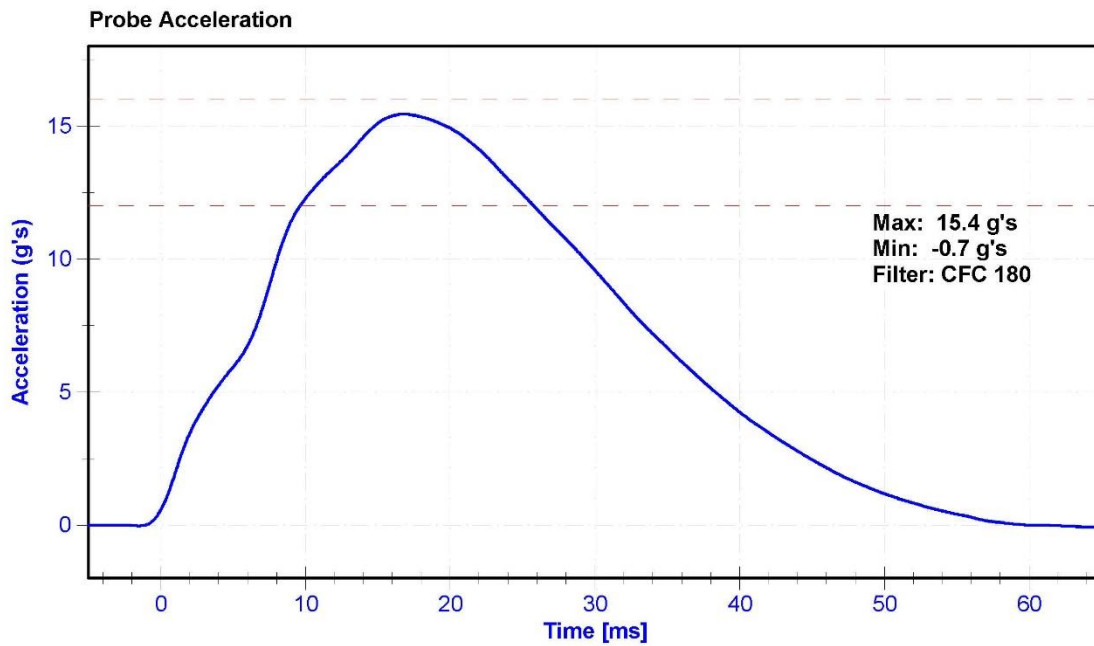

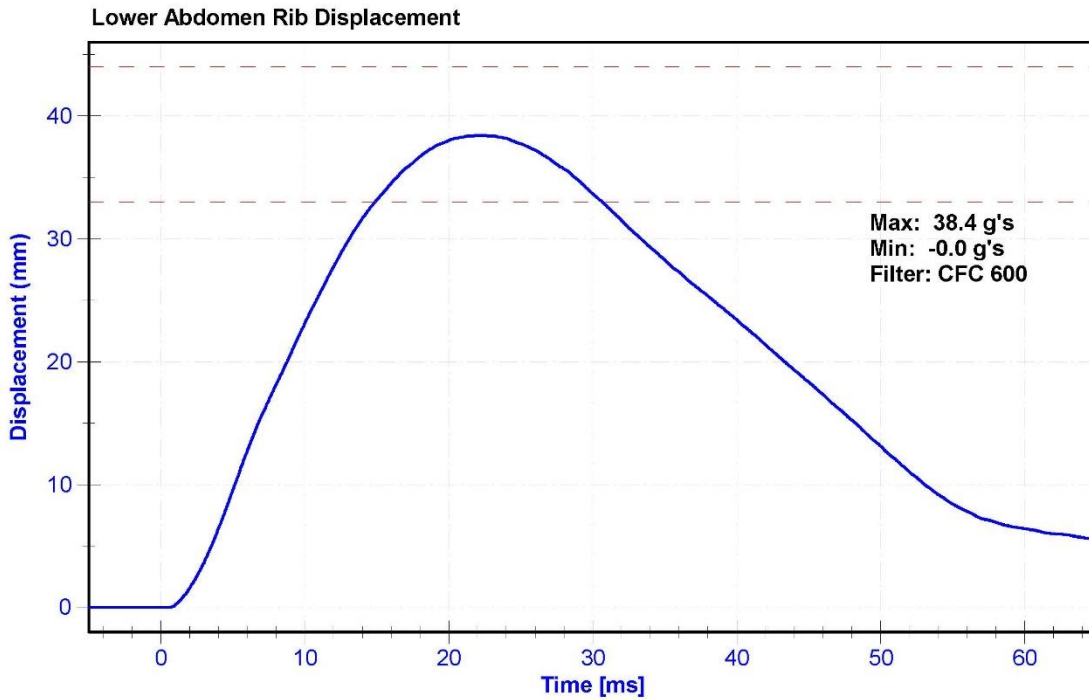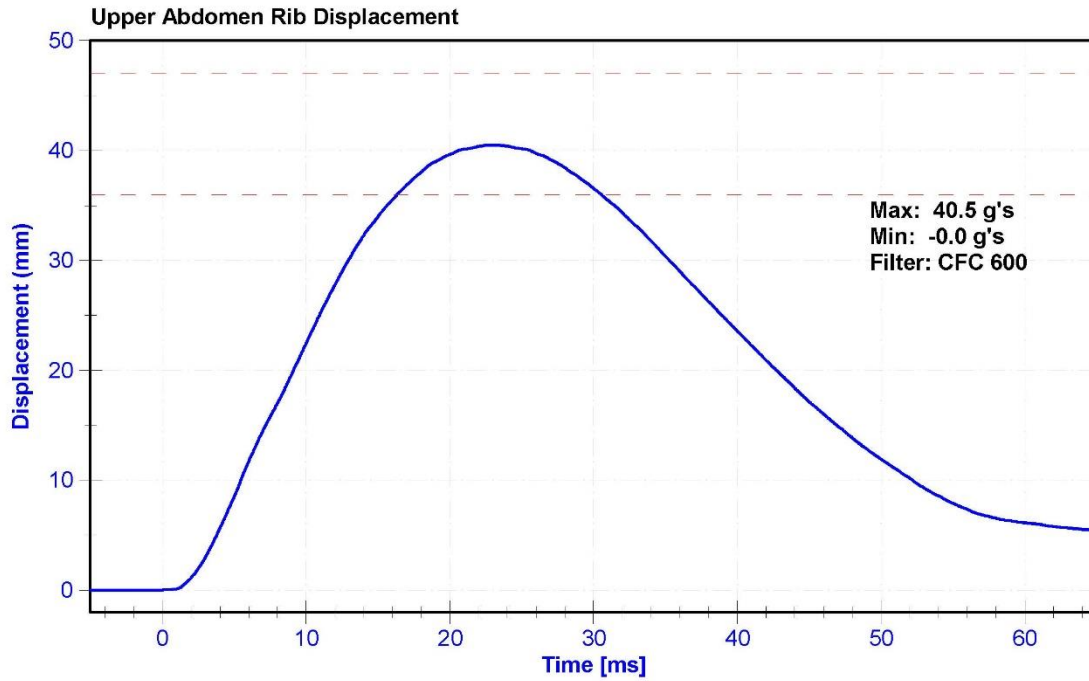

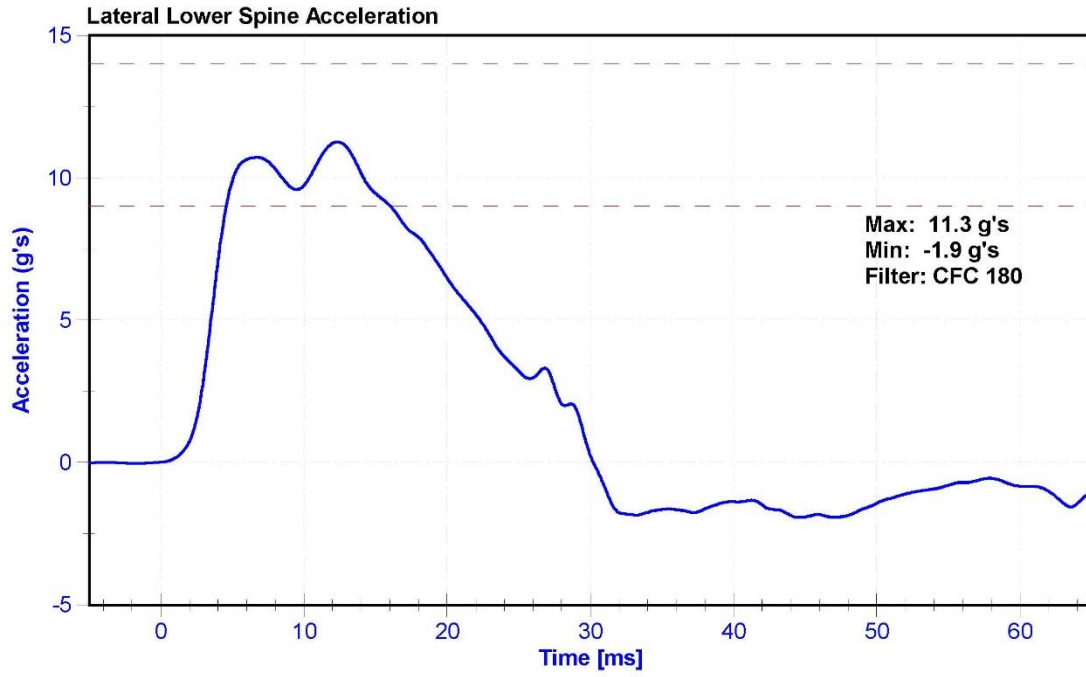

Resultant Data - SIDIIS Plug Compression

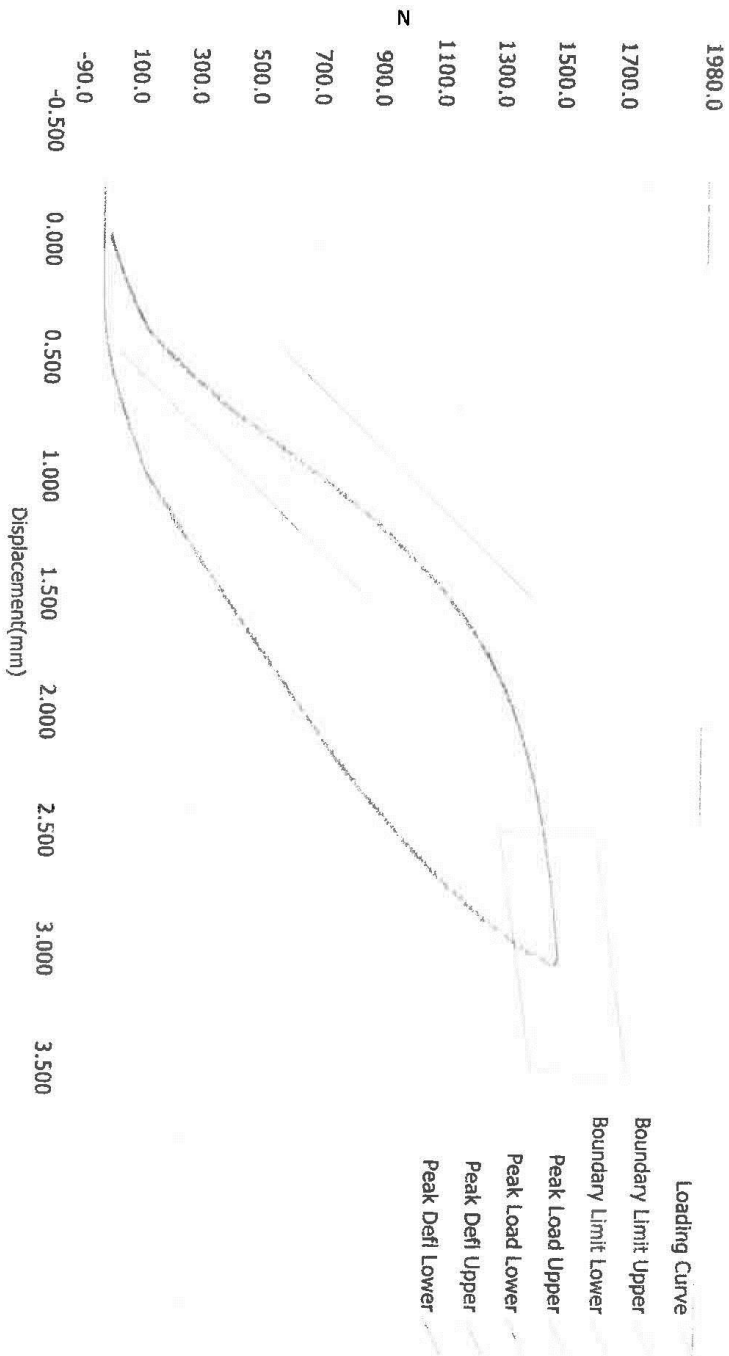

ATD Calibration Lab

CRASH
10 Labels


303

Test ID	Part Serial Number	Test Date	Test Time
Cert ID	47096	10/15/2011	1:09 PM
	ATD Serial Number	ATD Type	
	N/A	SIDIIS	

Current Date : 10/15/2011

Current Time : 13:10:06

Resultant Data - SIDIIS Plug Compression

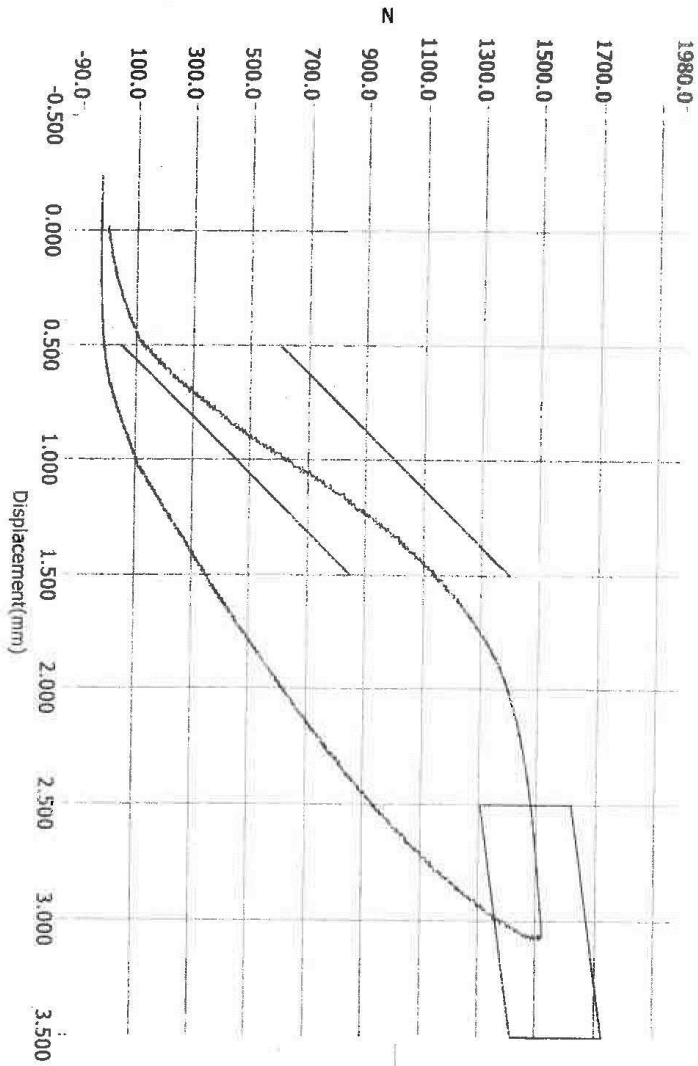

ATD Calibration Lab
 CERTIFICATION
 10/28/15
 303

<u>Test ID</u>	<u>Part Serial Number</u>	<u>Test Date</u>	<u>Test Time</u>
	48900	12/5/2011	7:45 PM
<u>Cert ID</u>	<u>ATD Serial Number</u>	<u>ATD Type</u>	
	N/A	SIDIIS	

Current Date : 12/5/2011

Current Time : 19:45:39


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	303	Laboratory Supervisor	M. Goehle



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.7	Pass
Humidity	10	70	%	43.8	Pass
Velocity	6.6	6.8	m/s	6.61	Pass
Probe Acceleration	38	47	g's	42.7	Pass
Lateral Pelvis Acceleration after 6ms	34	42	g's	39.9	Pass
Acetabulum Force	3,600	4,300	N	3904.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C14972	8/13/2015	2/11/2016
Pelvis Y Accelerometer	ENDEVCO 7264	AC-P51259	10/19/2015	4/18/2016
Acetabulum Load Cell	Denton IF-520	LC-236Fy	6/29/2015	6/28/2016
Certification Plug	Humanetics	48900	12/05/2011	N/A
Crash Test Plug	Humanetics	47096	10/15/2011	N/A

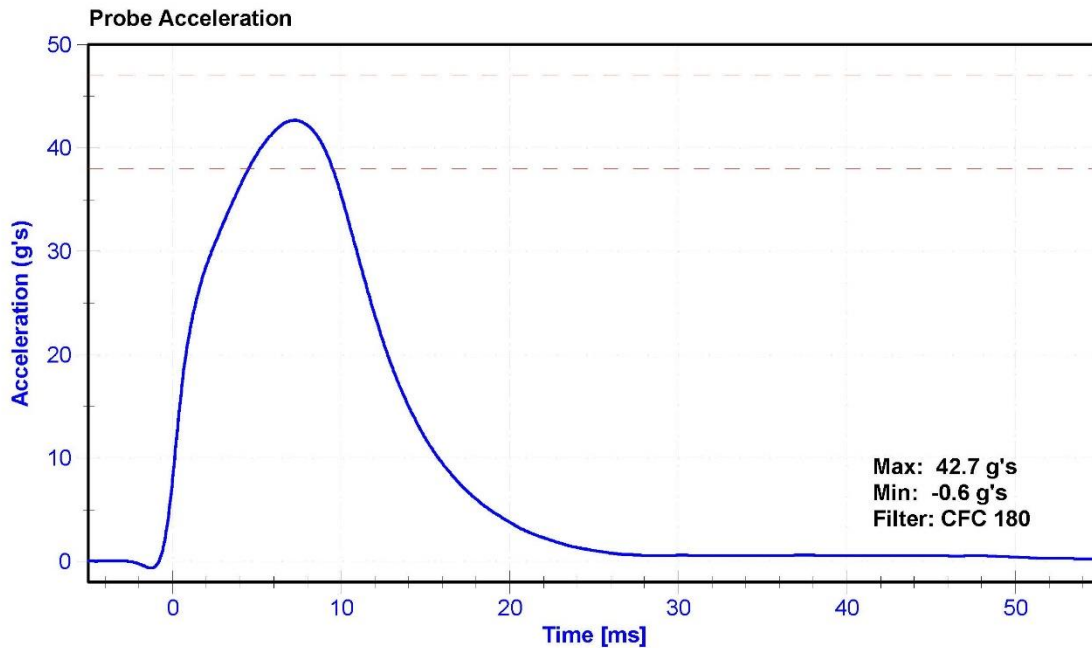

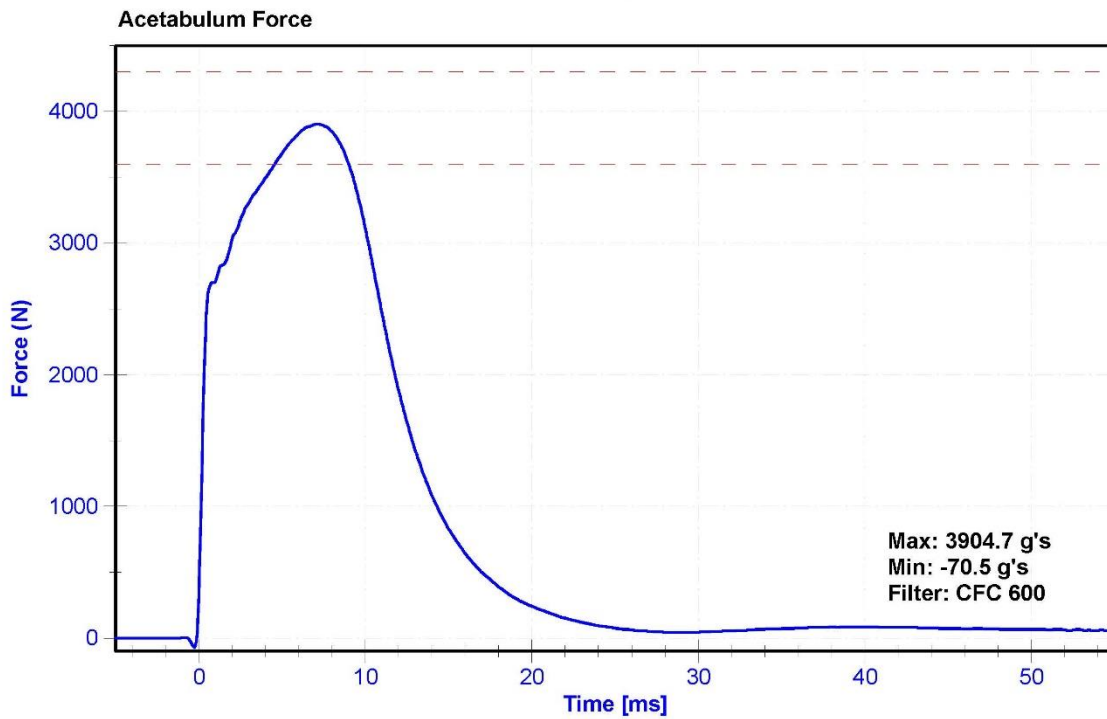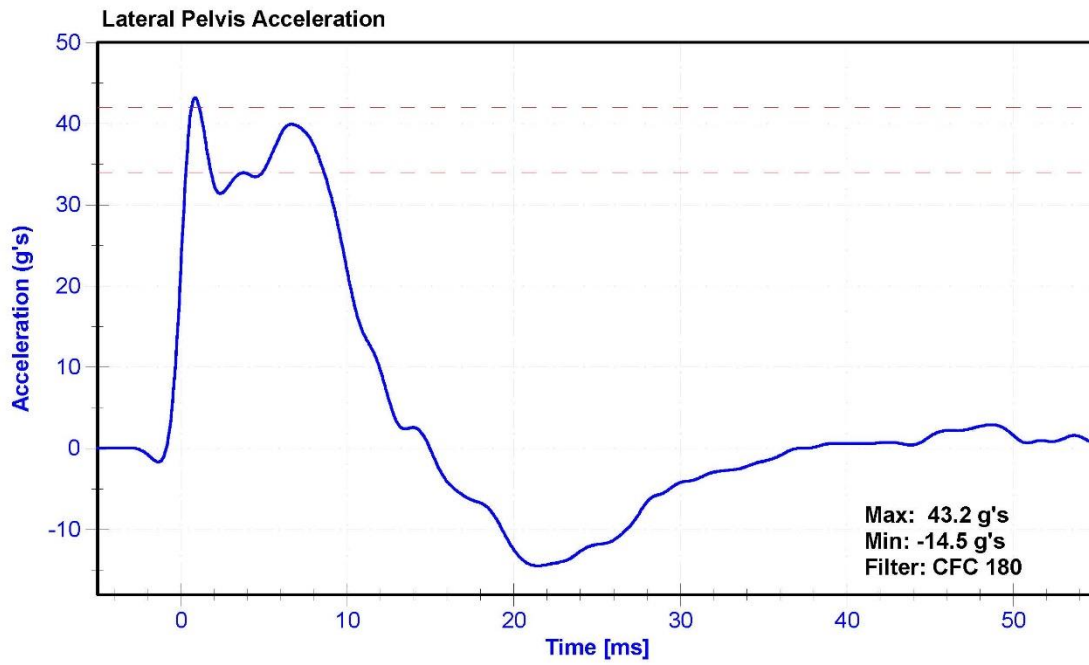


ATD Manufacturer	FTSS	Test Technician	M. Geesey
ATD Serial Number	303	Laboratory Supervisor	M. Goehle



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.9	Pass
Humidity	10	70	%	29.2	Pass
Velocity	4.2	4.4	m/s	4.35	Pass
Probe Acceleration	36	45	g's	40.4	Pass
Lateral Pelvis Acceleration	28	39	g's	31.4	Pass
Iliac Force	4,100	5,100	N	4541.7	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-C14972	8/13/2015	2/11/2016
Pelvis Y Accelerometer	ENDEVCO 7264	AC-P51259	10/19/2015	4/18/2016
Iliac Load Cell	DENTON 3228J	LC-285Fy	7/21/2015	7/20/2016

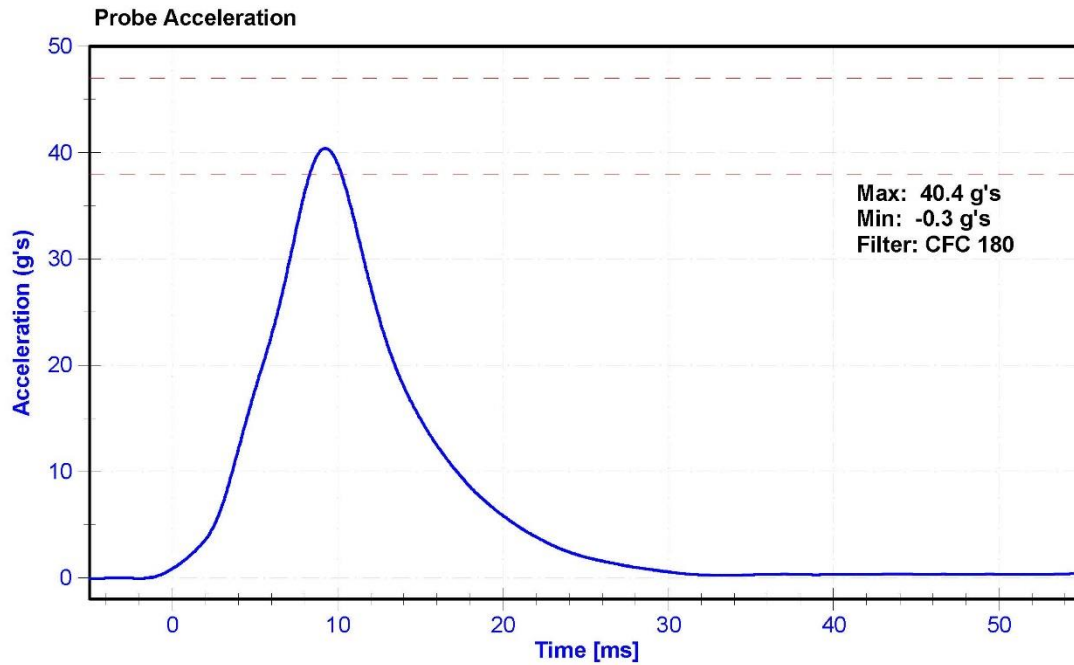

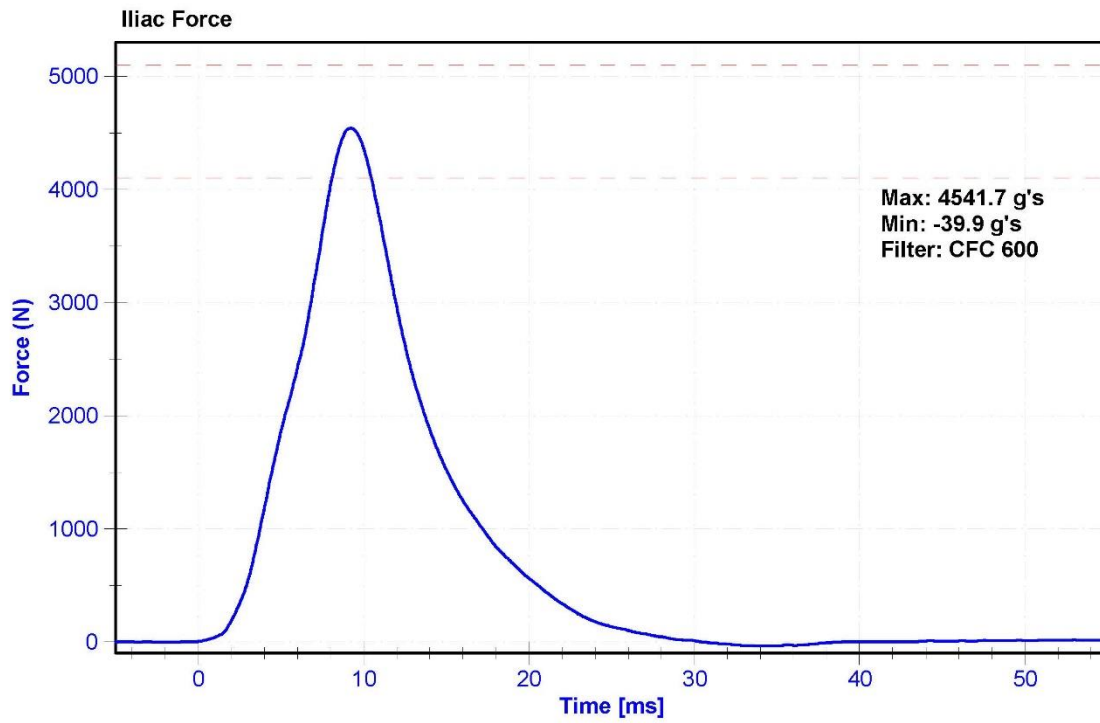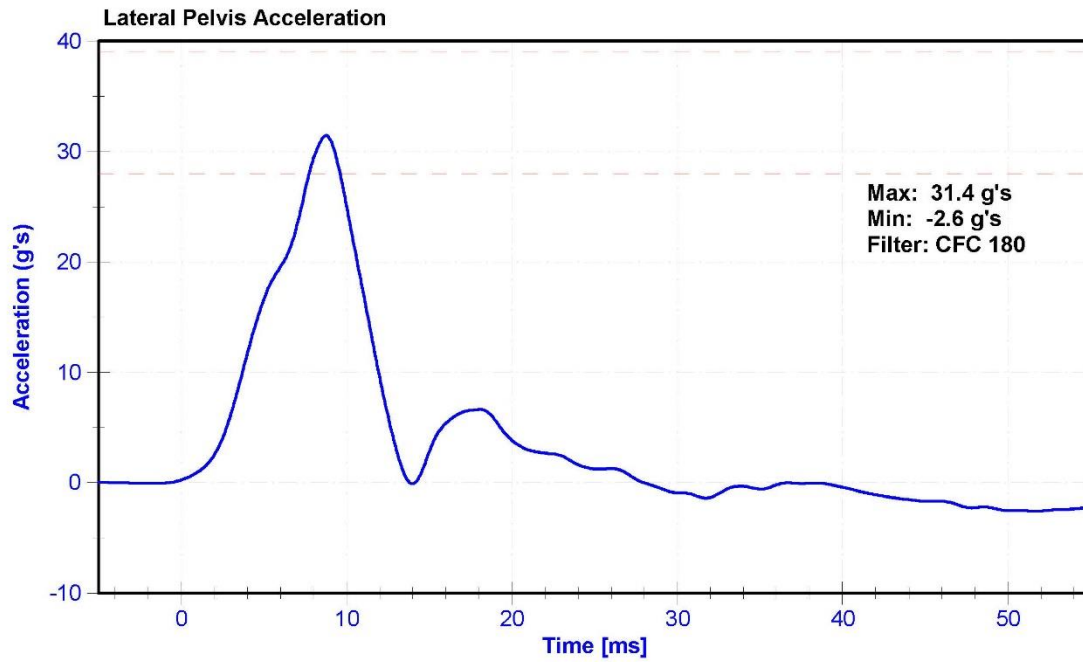

APPENDIX D

TEST EQUIPMENT AND INSTRUMENTATION CALIBRATION DATA

Table 1 – Dummy Instrumentation (ES-2re)

			ES-2re S/N: F034		
			Serial Number	Manufacturer	Calibration Date
Head Accelerometers	Primary	X	AC-P58904	ENDEVCO	10/19/2015
		Y	AC-P58911	ENDEVCO	10/19/2015
		Z	AC-P58776	ENDEVCO	10/19/2015
	Redundant	X	AC-P58887	ENDEVCO	10/19/2015
		Y	AC-P58888	ENDEVCO	10/19/2015
		Z	AC-P51734	ENDEVCO	10/19/2015
Thorax Rib Displacement Potentiometers	Upper	Y	DS-183GFE	Honeywell	10/19/2015
	Middle	Y	DS-184GFE	Honeywell	10/19/2015
	Lower	Y	DS-182GFE	Honeywell	10/19/2015
Abdomen Load Cells	Forward	Y	LC-1512	DENTON	6/25/2015
	Middle	Y	LC-1526	DENTON	6/25/2015
	Rear	Y	LC-1516	DENTON	6/25/2015
Lower Spine Accelerometers (T12)		X	AC-P52079	ENDEVCO	10/16/2015
		Y	AC-P51948	ENDEVCO	10/16/2015
		Z	AC-P51269	ENDEVCO	10/16/2015
Pubic Symphysis Load Cell		Y	LC-465Fy	Denton	6/25/2015

Table 2 – Dummy Instrumentation (SID-IIs)

			SID-IIs S/N: 303			
			Serial Number	Manufacturer	Calibration Date	
Head Accelerometers	Primary	X	AC-P83420	Endevco	10/16/2015	
		Y	AC-P52040	ENDEVCO	10/14/2015	
		Z	AC-P58737	ENDEVCO	10/14/2015	
	Redundant	X	AC-P51668	ENDEVCO	10/14/2015	
		Y	AC-P51327	ENDEVCO	10/14/2015	
		Z	AC-P51695	ENDEVCO	10/14/2015	
Displacement Potentiometers	Thoracic Rib	Upper	Y	DS-1199GFE	Servo	10/19/2015
		Middle	Y	DS-1246GFE	Servo	10/19/2015
		Lower	Y	DS-1256GFE	Servo	10/19/2015
	Abdominal Rib	Upper	Y	DS-1274GFE	Servo	10/19/2015
		Lower	Y	DS-1285GFE	Servo	10/19/2015
Lower Spine Accelerometers (T12)		X	AC-P51945	ENDEVCO	10/19/2015	
		Y	AC-P51974	ENDEVCO	10/19/2015	
		Z	AC-P51946	ENDEVCO	10/19/2015	
Acetabulum Load Cell		Y	LC-236Fy	Denton	6/29/2015	
Iliac Wing Load Cell		Y	LC-285Fy	DENTON	7/21/2015	
Pelvis Plug (struck side)			46020	HUMANETICS	9/20/2011	
Pelvis Plug (non-struck side)						

Table 3 – Vehicle Instrumentation

Vehicle Instrumentation			Serial Number	Manufacturer	Calibration Date
1	Vehicle Center of Gravity	X	AC-A156947	MSI 1201	10/9/2015
	Vehicle Center of Gravity	Y	AC-A156930	MSI 1201	10/9/2015
	Vehicle Center of Gravity	Z	AC-A156943	MSI 1201	10/9/2015
2	Right Sill at Front Seat	X	AC-A156913	MSI 1201	10/9/2015
	Right Sill at Front Seat	Y	AC-A156934	MSI 1201	10/9/2015
	Right Sill at Front Seat	Z	AC-A156928	MSI 1201	10/9/2015
3	Right Sill at Rear Seat	X	AC-A156919	MSI 1201	10/9/2015
	Right Sill at Rear Seat	Y	AC-A156920	MSI 1201	10/9/2015
	Right Sill at Rear Seat	Z	AC-A156927	MSI 1201	10/9/2015
4	Left Sill at Front Door	Y	AC-A156946	MSI 1201	10/9/2015
5	Left Sill at Rear Door	Y	AC-A156921	MSI 1201	10/9/2015
6	Left A-Post Lower	Y	AC-A127674	MSI 1201	10/15/2015
7	Left A-Post Middle	Y	AC-A127666	MSI 1201	10/15/2015
8	Left B-Post Lower	Y	AC-A127657	MSI 1201	8/21/2015
9	Left B-Post Middle	Y	AC-A126818	MSI 1201	10/14/2015
10	Front Seat Track	Y	AC-A112918	MSI 1201	10/14/2015
11	Rear Seat Track or Structure	Y	AC-A120603	MSI 1201	10/14/2015
12	Right Rear Occ. Compartment	Y	AC-A126816	MSI 1201	10/14/2015
13	Engine Block	X	AC-A126783	MSI 1201	10/15/2015
	Engine Block	Y	AC-A126803	MSI 1201	10/15/2015
14	Rear Floorpan Above Axle	X	AC-A127660	MSI 1201	10/14/2015
	Rear Floorpan Above Axle	Y	AC-A126789	MSI 1201	10/14/2015
	Rear Floorpan Above Axle	Z	AC-A127675	MSI 1201	10/14/2015

TABLE 4 – MDB Instrumentation

MDB Instrumentation		Serial Number	Manufacturer	Calibration Date
MDB Center of Gravity	X	AC-C14901	ENDEVCO	6/15/2015
MDB Center of Gravity	Y	AC-CP30	ENDEVCO	6/15/2015
MDB Center of Gravity	Z	AC-C16680	ENDEVCO	6/15/2015
Left Frame at Rear Axle Centerline	X	AC-AH5M8	ENDEVCO	6/15/2015
Left Frame at Rear Axle Centerline	Y	AC-C16499	ENDEVCO	6/15/2015