

REPORT NUMBER: NCAP-CAL-20-007

**NEW CAR ASSESSMENT PROGRAM (NCAP)
FRONTAL BARRIER IMPACT TEST**

**Ford Motor Co.
2020 Ford Transit
Wagon**

NHTSA No: M20200206

**PREPARED BY:
CALSPAN CORPORATION
P.O. BOX 400
BUFFALO, NEW YORK 104625**



March 30, 2020

FINAL REPORT

**PREPARED FOR:
U. S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
OFFICE OF CRASHWORTHINESS STANDARDS
1200 NEW JERSEY AVE SE, ROOM W43-410
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Administration, in response to Contract Number 693JJ919D000005.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof.

If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: Matthew Pronko Date: March 30, 2020
Matthew Pronko, Test Engineer

Approved by: Vanessa Hansen Date: March 30, 2020
Vanessa Hansen, Operations Manager

FINAL REPORT ACCEPTANCE BY OCWS:

Division Chief, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

COTR, New Car Assessment Program
NHTSA, Office of Crashworthiness Standards

Date: _____

TECHNICAL REPORT DOCUMENTATION PAGE

1. Report No. NCAP-CAL-20-007		2. Government Accession No.		3. Recipient's Catalog No.																																																					
4. Title and Subtitle Final Report of New Car Assessment Program Frontal Impact Testing of a 2020 Ford Transit Wagon NHTSA No.: M20200206				5. Report Date March 30, 2020																																																					
				6. Performing Organization Code CAL																																																					
7. Author(s) Matthew Pronko, Test Engineer Vanessa Hansen, Operations Manager				8. Performing Organization Report No. CAL-DOT-2020-007																																																					
9. Performing Organization Name and Address Calspan Corporation Transportation Test Operations P.O. Box 400 Buffalo, New York 104625				10. Work Unit No.																																																					
				11. Contract or Grant No. 693JJ919D000005																																																					
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Office of Crashworthiness Standards 1200 New Jersey Ave., SE, Room W43-410 Washington, D.C. 20590				13. Type of Report and Period Covered: Final Test Report January 15, 2020 - March 30, 2020																																																					
				14. Sponsoring Agency Code NRM-110																																																					
15. Supplementary Notes																																																									
16. Abstract A 56.30 km/h (35 mph), NCAP frontal rigid barrier impact test was conducted on a 2020 Ford Transit Wagon in accordance with the specifications of the Office of Crashworthiness Standards Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing. This test was conducted to obtain data related to FMVSS Nos. 208, 212, 219 (partial), 301, and 305 performance. The test was conducted at Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on January 15, 2020. The impact velocity of the vehicle was 56.24 km/h, and the ambient temperature at the barrier face at the time of impact was 21°C. The target vehicle post-test maximum crush was 466 mm at vehicle centerline. The test vehicle's occupant performance data is as follows:																																																									
<table border="1"> <thead> <tr> <th rowspan="2">Measurement Description</th> <th rowspan="2">Units</th> <th colspan="2">Driver ATD (Serial No. 142)</th> <th colspan="2">Passenger ATD (Serial No. 140)</th> </tr> <tr> <th>Threshold</th> <th>Result</th> <th>Threshold</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC₁₅)</td> <td></td> <td>700</td> <td>215.096</td> <td>700</td> <td>417.451</td> </tr> <tr> <td>Maximum Chest Compression</td> <td>mm</td> <td>63</td> <td>-30.646</td> <td>52</td> <td>-23.127</td> </tr> <tr> <td>Nij</td> <td></td> <td>1</td> <td>0.327</td> <td>1</td> <td>0.761</td> </tr> <tr> <td>Neck Tension</td> <td>N</td> <td>4,170</td> <td>2049.835</td> <td>2,620</td> <td>1579.903</td> </tr> <tr> <td>Neck Compression</td> <td>N</td> <td>4,000</td> <td>-134.859</td> <td>2,520</td> <td>-248.356</td> </tr> <tr> <td>Left Femur Force</td> <td>N</td> <td>10,008</td> <td>-1698.146</td> <td>6,805</td> <td>-1614.998</td> </tr> <tr> <td>Right Femur Force</td> <td>N</td> <td>10,008</td> <td>-1682.205</td> <td>6,805</td> <td>-1458.096</td> </tr> </tbody> </table>						Measurement Description	Units	Driver ATD (Serial No. 142)		Passenger ATD (Serial No. 140)		Threshold	Result	Threshold	Result	Head Injury Criteria (HIC ₁₅)		700	215.096	700	417.451	Maximum Chest Compression	mm	63	-30.646	52	-23.127	Nij		1	0.327	1	0.761	Neck Tension	N	4,170	2049.835	2,620	1579.903	Neck Compression	N	4,000	-134.859	2,520	-248.356	Left Femur Force	N	10,008	-1698.146	6,805	-1614.998	Right Femur Force	N	10,008	-1682.205	6,805	-1458.096
Measurement Description	Units	Driver ATD (Serial No. 142)		Passenger ATD (Serial No. 140)																																																					
		Threshold	Result	Threshold	Result																																																				
Head Injury Criteria (HIC ₁₅)		700	215.096	700	417.451																																																				
Maximum Chest Compression	mm	63	-30.646	52	-23.127																																																				
Nij		1	0.327	1	0.761																																																				
Neck Tension	N	4,170	2049.835	2,620	1579.903																																																				
Neck Compression	N	4,000	-134.859	2,520	-248.356																																																				
Left Femur Force	N	10,008	-1698.146	6,805	-1614.998																																																				
Right Femur Force	N	10,008	-1682.205	6,805	-1458.096																																																				
17. Key Words 56.3 km/h (35 mph) Full Frontal Rigid Barrier Impact Test New Car Assessment Program (NCAP)				18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division 1200 New Jersey Ave, SE Washington, DC 20590																																																					
19. Security Class. (of this report) UNCLASSIFIED		20. Security Class. (of this page) UNCLASSIFIED		21. No. of Pages 169	22. Price																																																				

TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
1	Purpose and Summary of the Test	1-1
2	Occupant and Vehicle Information / Data Sheets	2-1
<u>Data Sheet</u>		<u>Page</u>
1	General Test and Vehicle Parameter Data	2-2
2	Seat Adjustment, Fuel System, and Steering Wheel Data	2-6
3	Dummy Longitudinal Clearance Dimensions	2-8
4	Dummy Lateral Clearance Dimensions	2-9
5	Seat Belt Positioning Data	2-10
6	High-Speed Camera Locations and Data	2-11
7	Vehicle Accelerometer Locations	2-13
8	Photographic Reference Target Locations	2-14
9	Load Cell Locations on Fixed Barrier	2-15
10	Test Vehicle Summary of Results	2-16
11	Post-Test Observations	2-17
12	Vehicle Profile Measurements	2-18
13	Accident Investigation Division Data	2-20
14	Vehicle Intrusion Measurements	2-21
15	Summary of Indicant FMVSS No.212 and FMVSS No.219 (Partial) Data	2-23
16	FMVSS 301 Barrier Impact & Static Rollover Results	2-25
17	Dummy/Vehicle Temperature Stabilization Chart	2-26
<u>Appendix</u>		<u>Page</u>
A	Photographs	A-1
B	Dummy Response Data Traces	B-1
C	Dummy Calibration and Performance Verification Data	C-1
D	Test Equipment and Instrumentation Calibration	D-1

SECTION 1

PURPOSE AND SUMMARY OF TEST

PURPOSE

This 56.3 km/h frontal barrier impact test is part of the Vehicle Barrier Impact Testing Program sponsored by the National Highway Traffic Safety Administration (NHTSA) under Contract No. 693JJ919D000005. The purpose of this test was to obtain vehicle crashworthiness and occupant restraint system performance data for consumer information purposes.

The 56.3 km/h frontal barrier impact test was conducted in accordance with the Office of Crashworthiness Standards Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing.

SUMMARY

A load cell barrier consisting of 128 load cells was impacted by a 2020 Ford Transit Wagon at a velocity of 56.24 km/h. The test was performed at Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on January 15, 2020. Pre- and post-test photographs of the vehicle and dummies to document the test can be found in Appendix A. One real-time camera and 16 high-speed cameras were used to document the frontal barrier impact event. Camera locations and other pertinent camera information can be found in Data Sheet 6 of this report.

One Part 572E, 50th percentile male anthropomorphic test device (ATD), was placed in the driver seating position and one Part 572O 5th percentile female ATD was placed in the right-front passenger seating position according to dummy placement instructions specified in the Laboratory Procedure for NCAP Full Frontal Rigid Barrier Impact Testing. Both ATDs were fully instrumented with head, chest and pelvis tri-axial accelerometers, chest displacement potentiometers, upper neck transducers, femur load cells, and lower leg instrumentation. Seat belt load cells were installed on the driver's and passenger's lap and shoulder belts to measure dummy torso and pelvic section loading. The driver (position 1) ATD (Serial No. 142) and the right-front passenger (position 2) ATD (Serial No. 140) were qualified prior to this test. Certification details, along with instrumentation calibration data, can be found in Appendix C of this report.

The 486 channels of data were recorded on an on-board data acquisition system. Appendix B contains the vehicle, load cell barrier and dummy response data traces.

There was 100 percent windshield retention and no intrusion into the protected zone of the windshield during the event. There was a total of 0.0 grams of stoddard solvent leakage after the event or during any phase of the static rollover. The maximum static crush of the vehicle was 466 mm and both driver and passenger side doors remained closed during the impact event and were operable after the impact.

The driver's visible contact points were as follows: The driver's head contacted the frontal airbag and then the head restraint. The upper torso contacted the frontal airbag. The right knee contacted the knee bolster and the left knee contacted the knee bolster and steering column.

The passenger's visible contact points were as follows: The passenger's head contacted the frontal airbag and then the head restraint. The upper torso contacted the frontal airbag. Both knees contacted the glove box.

The occupant data is summarized below.

ATD Position	HIC ₁₅	Nij	Neck Tension (N)	Neck Comp. (N)	3ms Chest Clip (Gs)	Chest Disp. (mm)	Left Femur (N)	Right Femur (N)
Driver (50 th)	215.096	0.327	2049.835	-134.859	43.448	-30.646	-1698.146	-1682.205
Passenger (5 th)	417.451	0.761	1579.903	-248.356	43.096	-23.127	-1614.998	-1458.096

GENERAL COMMENTS:

1. P1 (Driver) serial number - 142
2. P2 (Passenger) serial number - 140

Data Anomalies:

- Engine Top X Acceleration, Questionable data after 34 ms
- Engine Bottom X Acceleration, Questionable data after 41.7 ms

SECTION 2

OCCUPANT AND VEHICLE INFORMATION / DATA SHEETS

This section contains information reporting for the following Data Sheets:

Data Sheet No. 1 – General Test and Vehicle Parameter Data

Data Sheet No. 2 – Seat Adjustment, Fuel System, and Steering Wheel Data

Data Sheet No. 3 – Dummy Longitudinal Clearance Dimensions

Data Sheet No. 4 – Dummy Lateral Clearance Dimensions

Data Sheet No. 5 – Seat Belt Positioning Data

Data Sheet No. 6 – High-Speed Camera Locations and Data

Data Sheet No. 7 – Vehicle Accelerometer Locations

Data Sheet No. 8 – Photographic Reference Target Locations

Data Sheet No. 9 – Load Cell Locations on Fixed Barrier

Data Sheet No. 10 – Test Vehicle Summary of Results

Data Sheet No. 11 – Post-Test Observations

Data Sheet No. 12 – Vehicle Profile Measurements

Data Sheet No. 13 – Accident Investigation Division Data

Data Sheet No. 14 – Vehicle Intrusion Measurements

Data Sheet No. 15 – Summary of Indicant FMVSS No. 212 and FMVSS No. 219 (Partial)

Data Sheet No. 16 – FMVSS 301 Barrier Impact and Static Rollover Results

Data Sheet No. 17 – Dummy/Vehicle Temperature Stabilization Chart

**DATA SHEET NO. 1
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2020 Ford Transit Wagon
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200206
 Test Date: 1/15/2020

TEST VEHICLE INFORMATION AND OPTIONS

NHTSA No.	M20200206	Traction Control System (TCS)	Yes
Model Year	2020	Power Steering	Yes
Make	Ford	Power Window Auto-Reverse	No
Model	Transit	Driver Frontal Airbag	Yes
Body Style	Wagon	Driver Curtain Airbag	Yes
VIN	1FBAX2Y87LKA00516	Driver Head/Torso Airbag	No
Body Color	Silver	Driver Torso Airbag	No
Odometer Reading (km /mi)	172.7 mi	Driver Torso/Pelvis Airbag	Yes
Engine Displacement (L)	3.5	Driver Pelvis Airbag	No
Type / No. Cylinders	V6	Driver Knee Airbag	No
Engine Placement	Inline	Front Pass. Frontal Airbag	Yes
Transmission Type	Automatic	Front Pass. Curtain Airbag	Yes
Transmission Speeds	10-Speed	Front Pass. Head/Torso Airbag	No
Overdrive	Yes	Front Pass. Torso Airbag	No
Final Drive	Rear Wheel Drive	Front Pass. Torso/Pelvis Airbag	Yes
Roof Rack	No	Front Pass. Pelvis Airbag	No
Sunroof / T-Top	No	Front Pass. Knee Airbag	No
Running Boards	Yes	Driver Pretensioner	Yes
Tilt Steering Wheel	Yes	Driver Load Limiter	Yes
Power Seats	No	Front Pass. Pretensioner	Yes
Anti-Lock Brakes (ABS)	Yes	Front Pass. Load Limiter	Yes
Automatic Door Locks (ADLs)	Yes	Other –	-

Does owner's manual provide instructions to turn off automatic door locks?

No

DATA FROM CERTIFICATION LABEL

Manufactured By	Ford Motor Co.	GVWR (kg)	4196
Date of Manufacture	10/19	GAWR Front (kg)	1873
		GAWR Rear (kg)	2622

VEHICLE SEATING AND WEIGHT CAPACITY DATA


Measured Parameter	Front	Rear	Third	Fourth	Total
Type of Seats	Bucket	Bench	Bench	Bench	
Number of Occupants	2	3	3	4	12
Capacity Wt. (VCW) (kg)					1405
Cargo Wt. (RCLW) (kg)					136

DATA SHEET NO. 1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2020 Ford Transit Wagon
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200206
 Test Date: 1/15/2020

Collect items circled in red, tire manufacturer, and tire name.

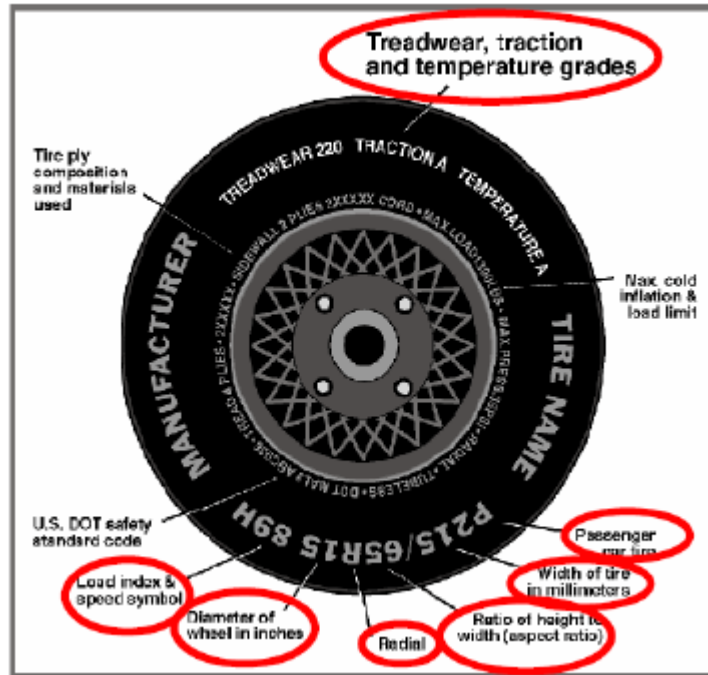

VEHICLE TIRE INFORMATION

Measured Parameter	Front	Rear
Maximum Tire Pressure (kPa)	620	620
Cold Pressure (kPa)	360	520
Recommended Tire Size	235/65R16C	235/65R16C
Tire Size on Vehicle	285/65R16	285/65R16
Tire Manufacturer	Continental	Continental
Tire Model	VanContact	VanContact
Treadwear	N/A	N/A
Traction	N/A	N/A
Temperature Grades	N/A	N/A
Tire Plies Sidewall	2 Polyester	2 Polyester
Tire Plies Body	2 Polyester, 2 Steel, 1 Polyamide	2 Polyester, 2 Steel, 1 Polyamide
Load Index / Speed Symbol	121/119R	121/119R
Tire Material	Rubber	Rubber
DOT Safety Code Left	16Y04DR832519	16Y04DR832519
DOT Safety Code Right	16Y04DR832519	16Y04DR832519

DATA SHEET NO. 1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2020 Ford Transit Wagon
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200206
 Test Date: 1/15/2020

TEST VEHICLE WEIGHTS

	Units	As Delivered Weights (UVW)			As Tested Weights (ATW)		
		Front Axle	Rear Axle	Total	Front Axle	Rear Axle	Total
Left	kg	743	630		797	712.5	
Right	kg	721	652		789	719	
Ratio	%	53.3	46.7		52.6	47.4	
Totals	kg	1464	1282	2746	1586	1431.5	3017.5

TARGET TEST WEIGHT CALCULATION

Measured Parameter	Units	Value	
Total Delivered Weight (UVW)	kg	2746	(A)
Weight of 1 P572E ATD & 1 P572O ATD	kg	142	(B)
Rated Cargo / Luggage Weight (RCLW)	kg	136	(C)
Calculated Vehicle Target Weight (TVTW)	kg	3024	(A+B+C)

TEST VEHICLE ATTITUDES AND CG

Condition	Units	LF	RF	LR	RR	CG (aft of front axle)
As Delivered	mm	885	885	922	921	1747
As Tested	mm	882	878	911	910	1776
Post-Test	mm	884	884	918	907	

GENERAL TEST VEHICLE DATA

Measurement Description	Units	Value
Total Vehicle Wheel Base	mm	3743
Total Vehicle Length at Left Side	mm	5947
Total Vehicle Length at Centerline	mm	5980
Total Vehicle Length at Right Side	mm	5947
Weight of Ballast in Cargo Area	kg	54
Weight of Vehicle Components Removed	kg	0
Amount of Stoddard Solvent in Fuel Tank	L	88.4

LIST OF COMPONENTS REMOVED TO MEET TEST WEIGHT:

None

DATA SHEET NO.1 ... (CONTINUED)
GENERAL TEST AND VEHICLE PARAMETER DATA

Test Vehicle: 2020 Ford Transit Wagon
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200206
 Test Date: 1/15/2020

TARGET VEHICLE STRUCTURAL MEASUREMENT

No.	Description	Pre-Test
1	Total Length	5980
2	Total Width	2009
3*	Bumper Top Height	655
4*	Bumper Bottom Height	513
5*	Longitudinal Member Top Height	631
6	Distance Between Longitudinal Members	1202
7	Longitudinal Member Width	97
8*	Engine Top Height	1159
9*	Engine Bottom Height	338
10	Engine and Gearbox Width	528
11	Front Bumper-Engine Distance	480
12*	Front Shock Absorber Fixing Height	1094
13*	Bonnet Leading Edge Height	1103
14	Front Shock Absorber Fixing Width	1588
15	Front Bumper – Front Axle Distance	1029
16	Front Axle – A Pillar Distance	100
17	A-Pillar – B-Pillar Distance	1177
18	B-Pillar – Rear Axle Distance	2469
19	B-Pillar – C-Pillar Distance	1492
20*	Roof Sill Bottom Height	1925
21*	Roof Sill Top Height	1999
22*	Floor Sill Bottom Height	459
23*	Floor Sill Top Height	661

*Height Measurements are taken from the ground
 Note: All measurements are in millimeters


DATA SHEET NO. 2
SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA

Test Vehicle: 2020 Ford Transit Wagon
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200206
 Test Date: 1/15/2020

NOMINAL DESIGN RIDING POSITION

The driver's seat back was set to the manufacturer's designated angle. The passenger's seat back was positioned in a similar manner as the driver's seat back. Seat back angles are measured at the headrest post bezel using a digital inclinometer.

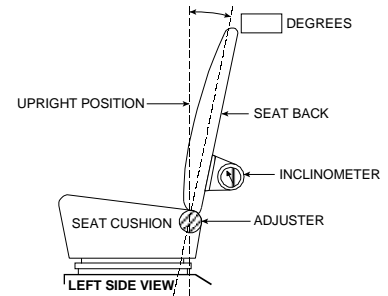

FRONT SEAT ASSEMBLY

Seating Position	Degrees
Driver Seat Back Angle	1.2
Passenger Seat Back Angle	7.2

SEAT FORE / AFT POSITIONS


The driver's seat was positioned at the mid-point of fore/aft travel at its lowest position. The passenger's seat was positioned at the most forward position of fore/aft travel. Zero is defined as the forward most position.

Seating Position	Total Fore / Aft Travel	Placed in Position #
Driver Seat	37 (0-36)	18
Passenger Seat	37 (0-36)	5

SEAT BELT UPPER ANCHORAGE

The driver's seat belt anchorage was positioned according to the manufacturer's designated positioning for a 50th percentile adult male ATD. The passenger's seat belt anchorage was positioned according to the manufacturer's designated positioning for a 5th percentile adult female ATD. For this test zero is defined as the uppermost position.

Seating Position	Total # of Positions	Placed in Position #
Driver Seat	4	0 – Uppermost
Passenger Seat	4	0 – Uppermost

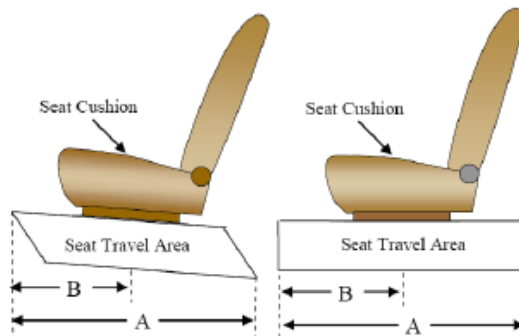

DATA SHEET NO. 2 ... (CONTINUED)
SEAT ADJUSTMENT, FUEL SYSTEM, AND STEERING WHEEL DATA

Test Vehicle: 2020 Ford Transit Wagon
 Test Program: NCAP Frontal Barrier Impact Test


NHTSA No.: M20200206
 Test Date: 1/15/2020

FUEL TANK CAPACITY

Description	Liters
Usable Capacity of "Standard Tank"	96.5
Usable Capacity of "Optional Tank"	N/A
92%-94% of Usable Capacity	87.5 – 89.4
Actual Amount of Solvent Used	88.4
1/3 of Usable Capacity	31.7


FUEL PUMP

The vehicle is equipped with an electric fuel pump. The fuel filler neck is on the left side of the vehicle. The pump creates positive pressure in the fuel lines, pushing the gasoline to the engine. See form 1 for more information.

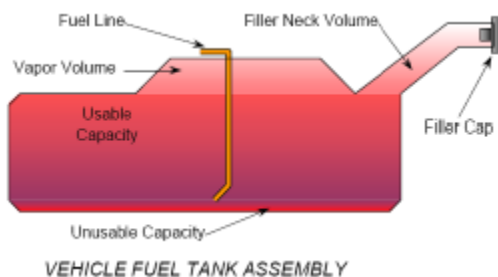

STEERING COLUMN ADJUSTMENT

Steering wheel and column adjustments are made so that the steering wheel hub is at the geometric center of the locus it describes when moved through its full range of motion. For angular measurements, a digital inclinometer was used to measure a plate which was placed across the steering wheel rim. A tape measure was used to measure the telescoping steering wheel travel.

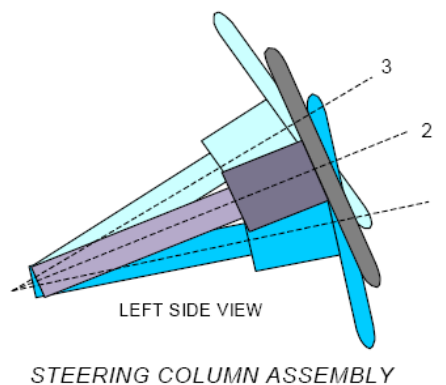


STEERING COLUMN POSITIONS

Description	Degrees	Fore / Aft Position (mm)
Lowermost position No. 1	31.7	
Geometric center position No. 2	33.8	
Uppermost position No. 3	35.9	
Telescoping Steering Wheel Travel		50
Test Position	33.8	25

DATA SHEET NO. 3
DUMMY LONGITUDINAL CLEARANCE DIMENSIONS

Test Vehicle: 2020 Ford Transit Wagon
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200206
Test Date: 1/15/2020

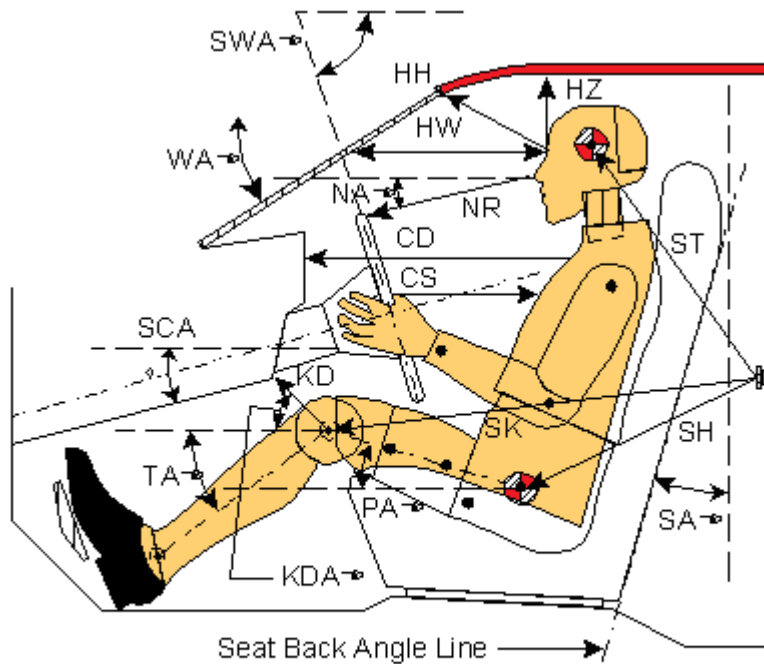


Left Side View

Code	Measurement Description	Driver (SN: 142)		Passenger (SN: 140)	
		Length (mm)	Angle (°)	Length (mm)	Angle (°)
WA°	Windshield Angle		38.0		
SWA°	Steering Wheel Angle		33.2		
SCA°	Steering Column Angle		56.8		
SA°	Seat Back Angle (on headrest post)		1.2		7.2
HZ	Head to Roof (Z)	260	90	322	90
HH	Head to Header	445	26.2	456	40.2
HW	Head to Windshield	680	0	748	0
NR	Nose to Rim / Dash	480	16.8	552	24.8
CD	Chest to Dash	591		505	
CS	Chest to Steering Hub	356	13.5		
RA	Rim to Abdomen	223	0		
KDL	Left Knee to Dash	192	5.7	79	28.8
KDR	Right Knee to Dash	172	3.2	88	19.8
PA°	Pelvic Angle		23.1		20.7
TA°	Tibia Angle		43.7		54.4
SK	Striker to Knee	603	5.4	656	0.8
ST	Striker to Head	683	81.3	613	72.3
SH	Striker to H-Point	173	6.7	308	1

DATA SHEET NO. 4
DUMMY LATERAL CLEARANCE DIMENSIONS

Test Vehicle: 2020 Ford Transit Wagon
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200206
 Test Date: 1/15/2020

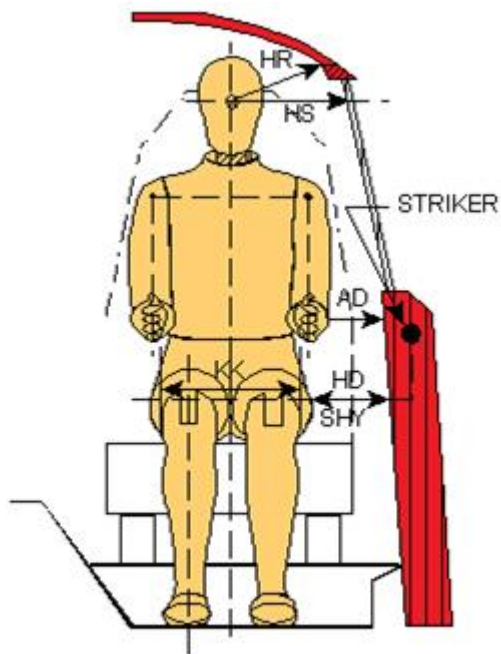


Front View

Code	Description	Driver (mm)	Passenger (mm)
AD	Arm to Door	180	105
HD	H-Point to Door	158	197
HR	Head to Side Header	312	383
HS	Head to Side Window	428	475
KK	Knee to Knee	330	215
SHY	Striker to H-Point (Y Direction)	290	320
AA	Ankle to Ankle	295	165

**DATA SHEET NO. 5
SEAT BELT POSITIONING DATA**

Test Vehicle: 2020 Ford Transit Wagon
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200206
 Test Date: 1/15/2020

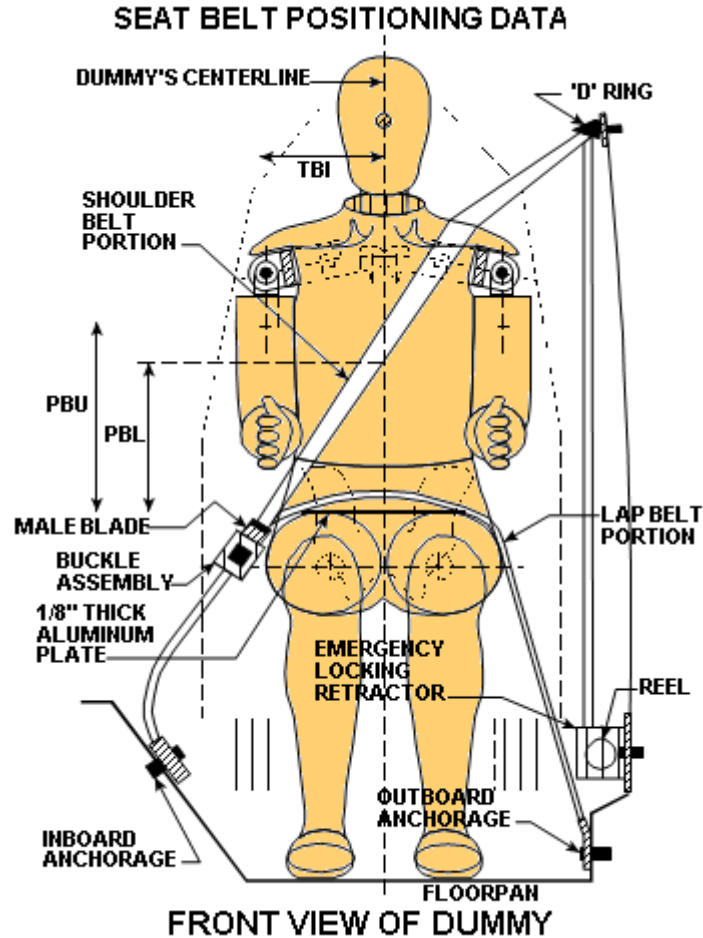

SEAT BELT POSITIONING MEASUREMENTS

Measurement Description	Units	Driver	Passenger
PBU — Top surface of reference to belt upper edge	mm	345	285
PBL — Top surface of reference to belt lower edge	mm	270	205

BELT LENGTH DATA


Measurement Description	Units	Driver	Passenger
Shoulder belt length as measured on ATD	mm	990	990
Lap Belt Length as measured on ATD	mm	690	642
Remainder of belt on reel	mm	870	868
Total belt length for continuous webbing systems	mm	2550	2500

**DATA SHEET NO. 6
HIGH-SPEED CAMERA LOCATIONS AND DATA**

Test Vehicle: 2020 Ford Transit Wagon
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200206
Test Date: 1/15/2020

CAMERA POSITIONS FOR FRONTAL IMPACTS

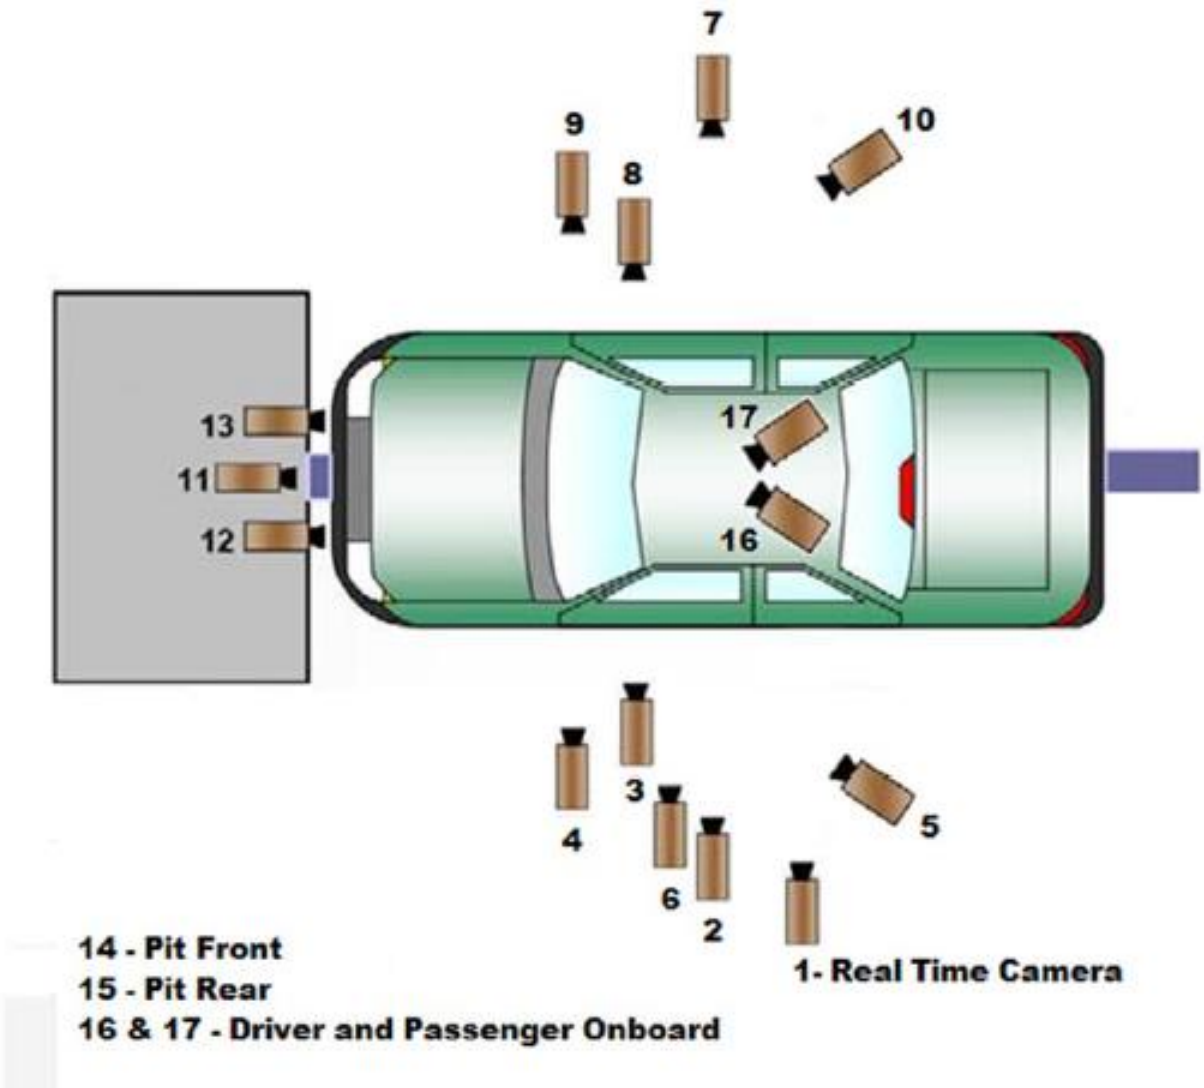

DATA SHEET NO. 6 ... (CONTINUED)
HIGH-SPEED CAMERA LOCATIONS AND DATA

Test Vehicle: 2020 Ford Transit Wagon
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200206
 Test Date: 1/15/2020

CAMERA LOCATIONS



No.	Camera View	Location (mm)			Lens (mm)	Speed (fps)
		X	Y	Z		
1	Real-Time Left Overall	-	-	-		60
2	Left Overall	-2939	-9034	-1235	24	1000
3	Driver Close-Up	-1184	-7279	-1343	50	1000
4	Left Front Half	-650	-7474	-1240	28	1000
5	Left Angle	-4230	-9549	-1813	50	1000
6	Steering Column	-1184	-7856	-1828	50	1000
7	Right Overall	-2711	8648	-1347	24	1000
8	Passenger Close-Up	-1094	7491	-1414	50	1000
9	Right Front Half	-602	7390	-1344	28	1000
10	Right Angle	-4228	6164	-1806	50	1000
11	Windshield	1125	0	-3471	12.5	1000
12	Driver Windshield	766	-439	-2363	25	1000
13	Passenger Windshield	766	439	-2363	25	1000
14	Pit Front	-1451	0	2315	12.5	1000
15	Pit Rear	-3017	0	2295	12.5	1000
16	Onboard Driver Airbag (Optional)				8	1000
17	Onboard Passenger Airbag (Optional)				8	1000

* COORDINATES: +X = forward of impact plane
 +Y = right of monorail center
 +Z = into ground

DATA SHEET NO. 7
VEHICLE ACCELEROMETER LOCATIONS

Test Vehicle: 2020 Ford Transit Wagon
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200206
Test Date: 1/15/2020

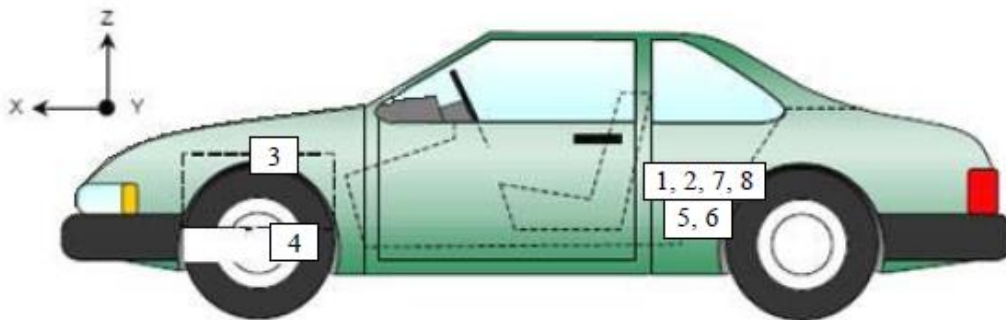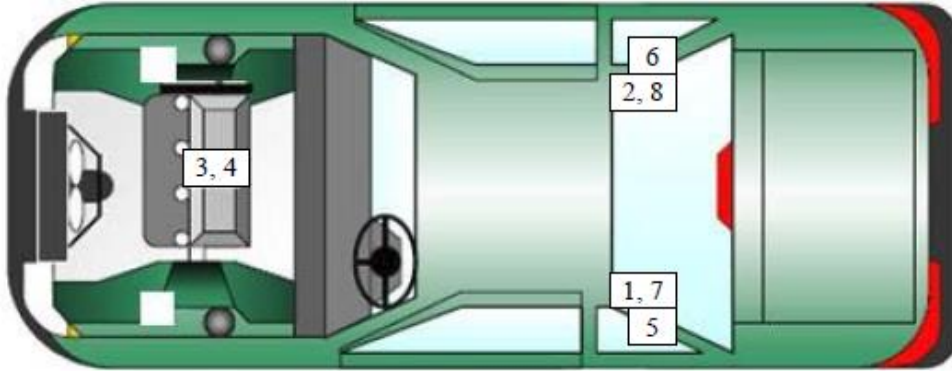

VEHICLE ACCELEROMETER PRE-TEST LOCATIONS

No.	Accelerometer Location	Measurements (mm)		
		X	Y	Z
1	Left Rear Accelerometer – X Direction	3299	-307	-193
2	Right Rear Accelerometer – X Direction	3293	143	-191
3	Engine Top X	5271	139	-643
4	Engine Bottom X	5092	-16	125
5	Left Rear Accelerometer – Z Direction	3299	-307	-193
6	Right Rear Accelerometer – Z Direction	3293	143	-191
7	Left Rear Accelerometer – X Direction Redundant	3301	-286	-188
8	Right Rear Accelerometer – X Direction Redundant	3296	163	-189

Reference Points: X – Rear Surface of Vehicle (+ forward)
 Y – Vehicle Centerline (+ to right)
 Z – Ground Plane (+ down)




DATA SHEET NO. 8
PHOTOGRAPHIC REFERENCE TARGET LOCATIONS

Test Vehicle: 2020 Ford Transit Wagon
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200206
 Test Date: 1/15/2020

Item	Value
A	471
B	1005
C	2205
D	612
E	3163
F	210
G	1417
H	2181
I	1499
J	1401
K	1402
L	1678
M	2182
N	1673
O	1400
P	1400
Q	1507

All units in millimeters

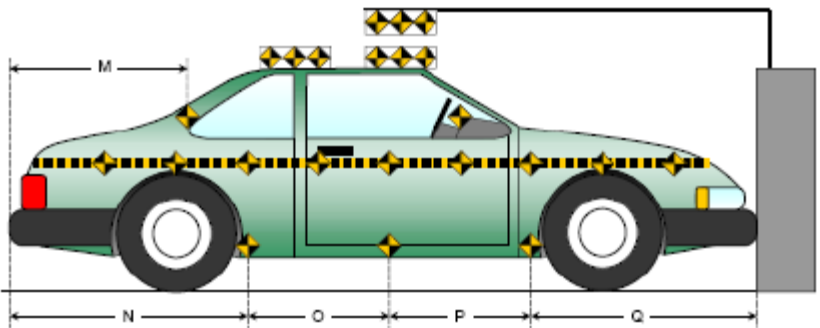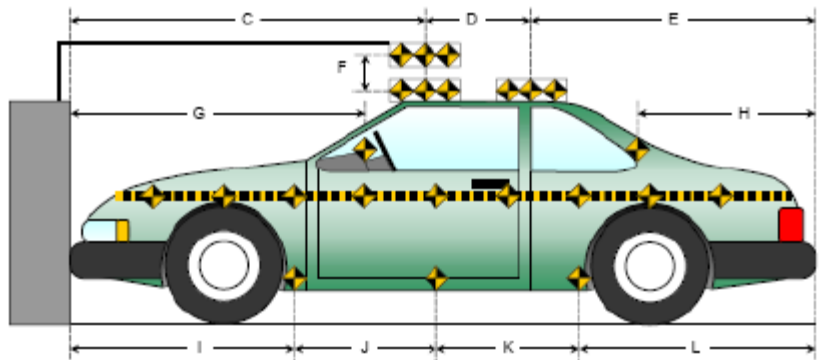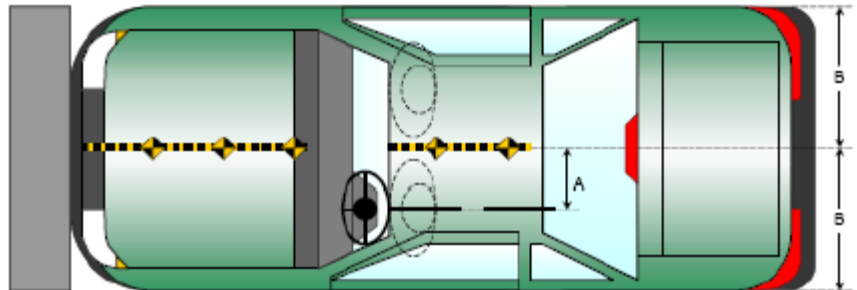

DATA SHEET NO. 9
LOAD CELL LOCATIONS ON FIXED BARRIER

Test Vehicle: 2020 Ford Transit Wagon
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200206
 Test Date: 1/15/2020

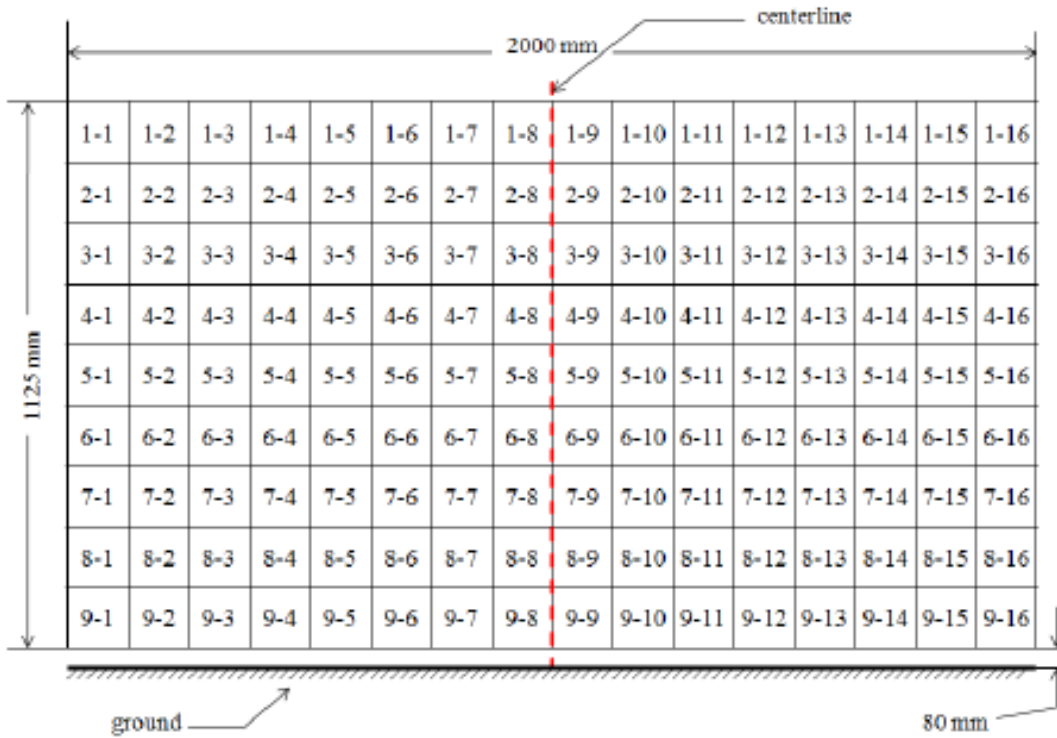


Figure 1 - Load Cell Locations on a 128-Load Cell Barrier with Plywood Height Extension*
 Please note above diagram is not actual representation of load cell barrier used.

DATA SHEET NO. 10
TEST VEHICLE SUMMARY OF RESULTS

Test Vehicle: 2020 Ford Transit Wagon
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200206
 Test Date: 1/15/2020

INSTRUMENTATION

Instrumentation	Number of Channels Collected
Driver Dummy Accelerometers	47
Passenger Dummy Accelerometers	47
Vehicle Structure Accelerometers	8
Load Cell Barrier	384
Total	486

CAMERA COVERAGE

Type of Camera	Number Used in this Test
High-Speed Vehicle Onboard	2
High-Speed Offboard	14
Real-Time Panning	1
Total	17

**DATA SHEET NO. 11
POST-TEST OBSERVATIONS**

Test Vehicle: 2020 Ford Transit Wagon
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200206
 Test Date: 1/15/2020

TEST DUMMY INFORMATION AND CONTACT LOCATIONS

Description	Driver	Passenger
Dummy Type / Serial No.	P572E 50 th Male / 142	P5720 5 th Female / 140
Head Contact	Front Airbag & Head Restraint	Front Airbag & Head Restraint
Upper Torso Contact	Front Airbag	Front Airbag
Lower Torso Contact	None	None
Left Knee Contact	Knee Bolster & Steering Column	Glovebox
Right Knee Contact	Knee Bolster	Glovebox

DOOR OPENING AND SEAT TRACK INFORMATION

Description	Driver	Passenger	Other
Locked / Unlocked Doors	Unlocked	Unlocked	
Front Door Opening	Closed & Operational	Closed & Operational	
Rear Door Opening	N/A	Operational	
Trunk/Hatch/Tailgate Opening			Operational
Seat Track Shift (mm)	0	0	
Seat Back Movement from Initial Position	No	No	

POST-TEST STRUCTURAL OBSERVATIONS

Critical Areas of Performance	Observations and Conclusions
Windshield Damage	Cracks Throughout
Window Damage	None
Other	N/A

VEHICLE REBOUND FROM BARRIER

Measured Parameter	Units	Value
Left Side	mm	1098
Center	mm	1097
Right Side	mm	1093
Average	mm	1096


SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION

Restraint Type	Driver		Passenger	
	Installed	Deployed	Installed	Deployed
Front Airbag	Yes	Yes	Yes	Yes
Side Airbag 1 - Curtain	Yes	No	Yes	No
Side Airbag 2 - Torso/Pelvis Airbag	Yes	No	Yes	No
Knee Airbag	No	N/A	No	N/A
Seat Belt Pretensioner	Yes	Yes	Yes	Yes
Seat Belt Load Limiter	Yes	Yes	Yes	Yes
Other				

**DATA SHEET NO. 12
VEHICLE PROFILE MEASUREMENTS**

Test Vehicle: 2020 Ford Transit Wagon
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200206
 Test Date: 1/15/2020

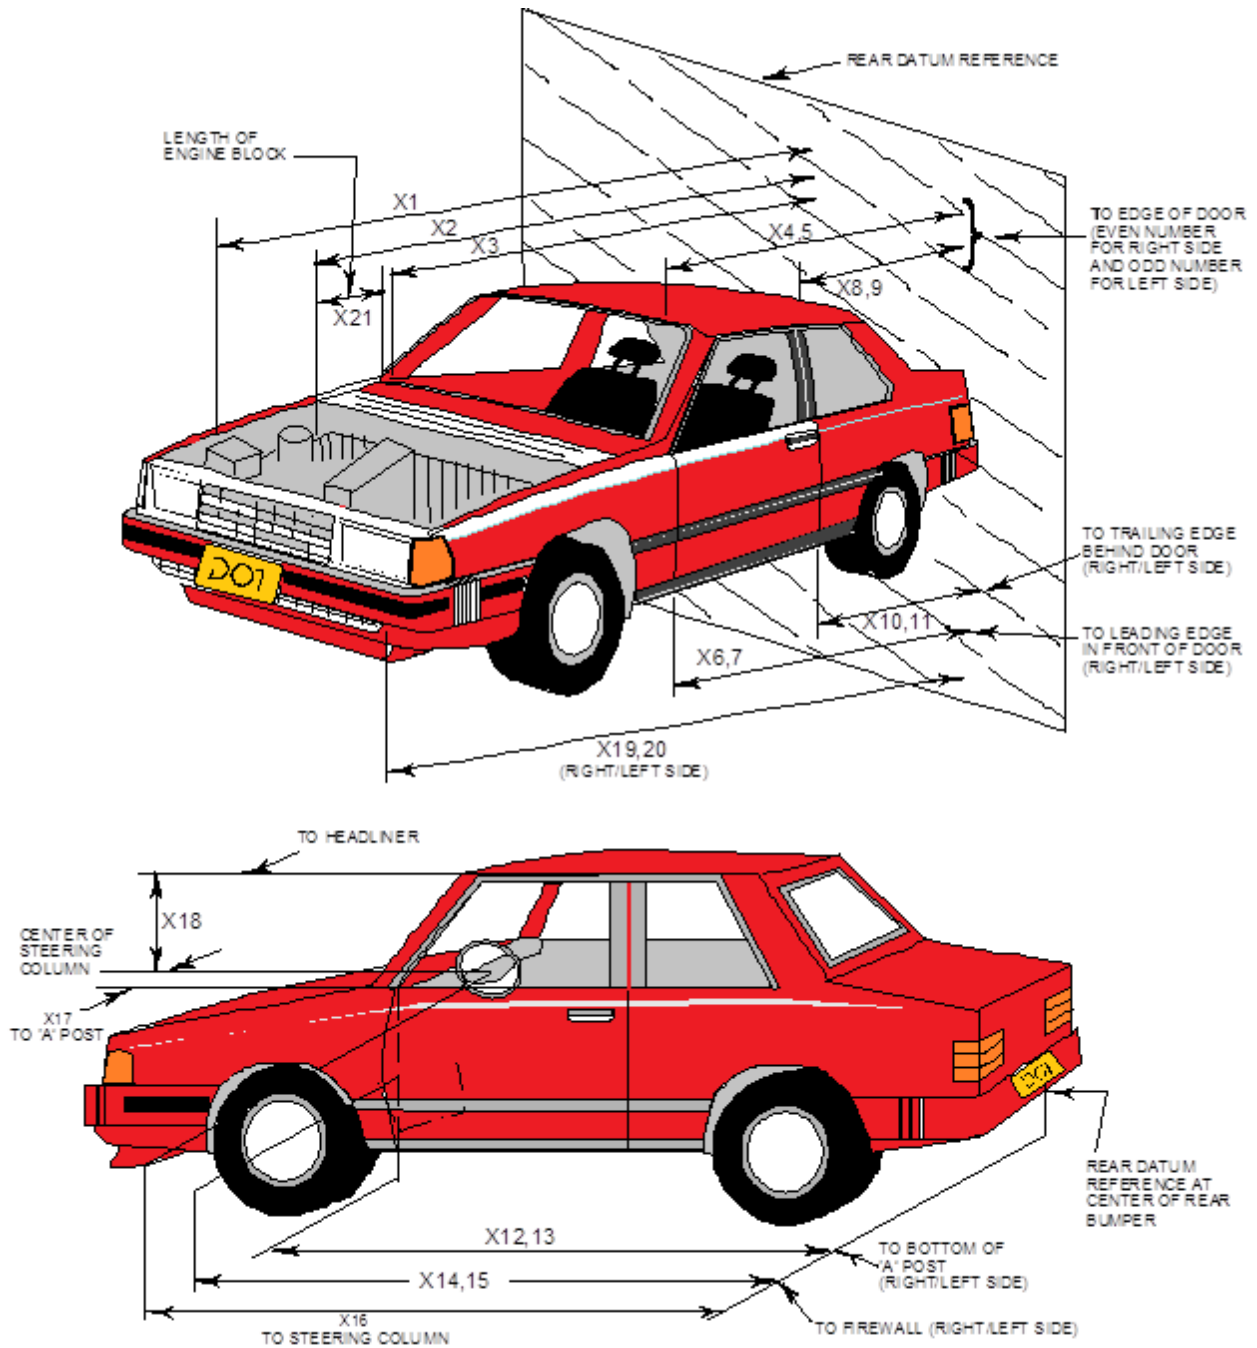

**DATA SHEET NO. 12 ... (CONTINUED)
VEHICLE PROFILE MEASUREMENTS**

Test Vehicle: 2020 Ford Transit Wagon
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200206
Test Date: 1/15/2020

No.	Measurement Description	Pre-Test	Post-Test	Difference
1	Total Length of Vehicle at Centerline	5980	5514	-466
2	Rear Surface of Vehicle (RSOV) to Front of Engine	5499	5349	-150
3	RSOV to Firewall	5257	5142	-115
4	RSOV to Upper Leading Edge of Right Door	4826	4825	-1
5	RSOV to Upper Leading Edge of Left Door	4829	4830	1
6	RSOV to Lower Leading Edge of Right Door	4532	4540	8
7	RSOV to Lower Leading Edge of Left Door	4533	4539	6
8	RSOV to Upper Trailing Edge of Right Door	3692	3689	-3
9	RSOV to Upper Trailing Edge of Left Door	3691	3689	-2
10	RSOV to Lower Trailing Edge of Right Door	3672	3680	8
11	RSOV to Lower Trailing Edge of Left Door	3812	3817	5
12	RSOV to Bottom of "A" Post of Right Side	4963	4965	2
13	RSOV to Bottom of "A" Post of Left Side	4961	4960	-1
14	RSOV to Firewall, Right Side	5166	5074	-92
15	RSOV to Firewall, Left Side	5154	5087	-67
16	RSOV to Steering Column	4371	4467	96
17	Center of Steering Column to "A" Post	443	344	-99
18	Center of Steering Column to Headliner	524	511	-13
19	RSOV to Right Side of Front Bumper	5964	5492	-472
20	RSOV to Left Side of Front Bumper	5963	5471	-492
21	Length of Engine Block	406	406	0
RD	RSOV to Right Side of Dash Panel	4553	4554	1
CD	RSOV to Center of Dash Panel	4396	4382	-14
LD	RSOV to Left Side of Dash Panel	4563	4562	-1

*UR= Unrecoverable data point
All Dimensions in mm

DATA SHEET NO. 13
ACCIDENT INVESTIGATION DIVISION DATA

Test Vehicle: 2020 Ford Transit Wagon
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200206
Test Date: 1/15/2020


VEHICLE INFORMATION

VIN: 1FBAX2Y87LKA00516
Vehicle Size Category: MPV

Wheelbase (mm): 3743
Test Weight (kg): 3017.5

ACCELEROMETER DATA

Accelerometer Locations: Please See Data Sheet No. 7
Cal. Procedure / Interval: Calspan Procedure / 6 month
Integration Algorithm: Trapezoidal
Linearity: > 99%
Impact Velocity (km/h): 56.24
Velocity Change (km/h): 63.65
Time of Separation (ms): 142

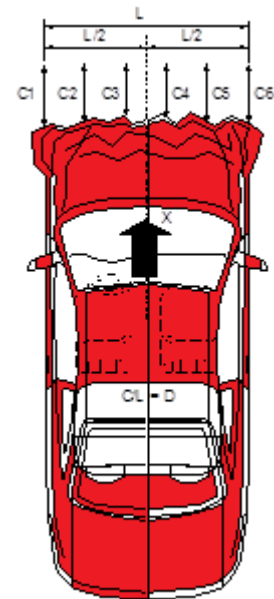

CRUSH PROFILE

Collision Deformation Classification: 12FDEW3
Midpoint of Damage: C3
Damage Region Length (mm): 1640
Impact Mode: Frontal

No.	Measurement Description	Units	Pre-Test	Post-Test	Difference
C1	Crush Zone 1 at Left Side	mm	5781	5493	288
C2	Crush Zone 2 at Left Side	mm	5954	5489	465
C3	Crush Zone 3 at Left Side	mm	5973	5512	461
C4	Crush Zone 4 at Right Side	mm	5975	5517	458
C5	Crush Zone 5 at Right Side	mm	5957	5509	448
C6	Crush Zone 6 at Right Side	mm	5780	5463	317
L	C1 to C6	mm	1640	1721	-81

**DATA SHEET NO. 14
VEHICLE INTRUSION MEASUREMENTS**

Test Vehicle: 2020 Ford Transit Wagon
 Test Program: NCAP Frontal Barrier Impact Test


NHTSA No.: M20200206
 Test Date: 1/15/2020

DOOR OPENING WIDTH

Item	Description	Units	Pre-Test	Post-Test	Difference
A	Left Side Upper	mm	1092	1092	0
B	Left Side Lower	mm	1009	1007	-2
D	Right Side Upper	mm	1099	1099	0
E	Right Side Lower	mm	1025	1022	-3

WHEELBASE MEASUREMENTS

Item	Description	Units	Pre-Test	Post-Test	Difference
C	Left Side Wheelbase	mm	3743	3720	-23
F	Right Side Wheelbase	mm	3743	3747	4

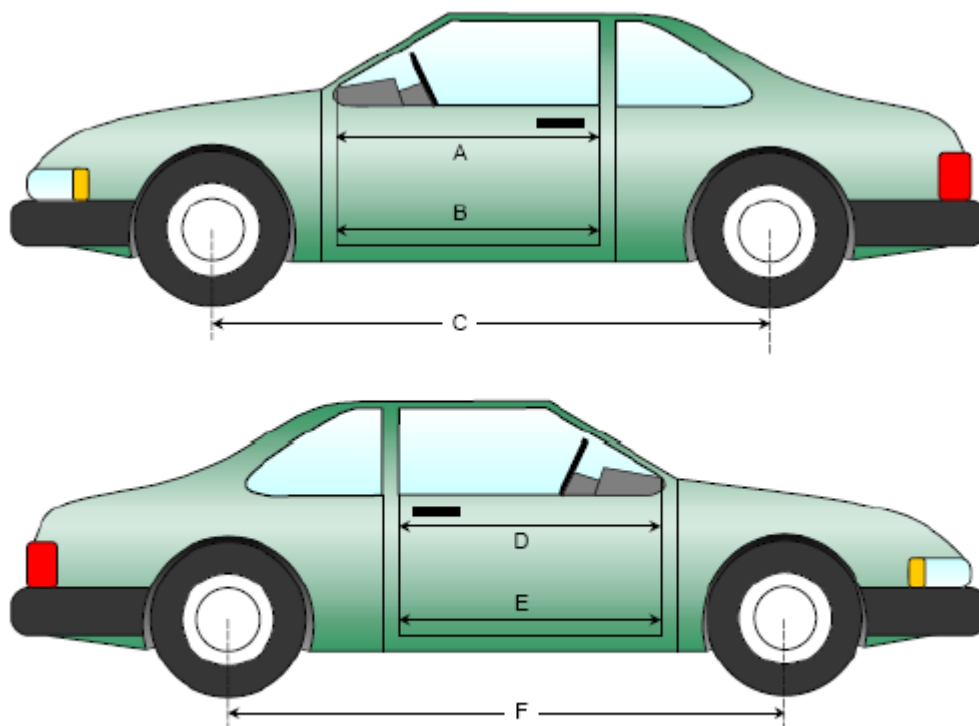

Left & Right Side Views

**DATA SHEET NO.14 ... (CONTINUED)
VEHICLE INTRUSION MEASUREMENTS**


Test Vehicle: 2020 Ford Transit Wagon
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200206
 Test Date: 1/15/2020

DRIVER COMPARTMENT INTRUSION

Item	Description	Units	Pre-Test	Post-Test	Difference
AB	Door Opening (Inside Window Jam)	mm	774	782	8
CX	Left Knee Bolster to X	mm	512	486	-26
DX	Right Knee Bolster to X	mm	501	446	-55
EX	Brake Pedal to X	mm	539	514	-25
FX	Foot Rest to X	mm	517	499	-18
GX	Center of Steering Column Wheel Hub to X	mm	157	238	81

X = Front of Seat Track (Stationary)

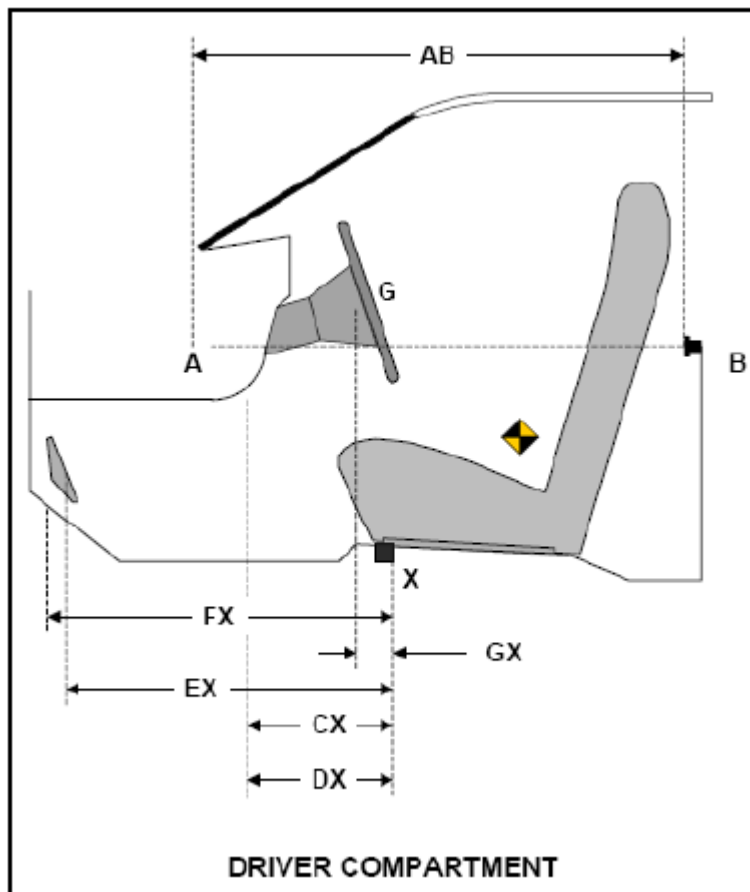

DATA SHEET NO. 15
SUMMARY OF FMVSS 212, 219 (PARTIAL), AND 301 DATA

Test Vehicle: 2020 Ford Transit Wagon
 Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200206
 Test Date: 1/15/2020


Windshield Mounting Details: A 0.8 mm trim surrounds the top and side of windshield while a plastic shroud is on the bottom.

The standard requires that the post-test retention measurement be a minimum of 75% of the pre-test total periphery measurement for vehicles not equipped with occupant passive restraints and 50% for each side of the windshield for vehicles which are equipped with occupant passive restraints.

Temperature of windshield molding during test: 21° C

WINDSHIELD PERIPHERY MEASUREMENTS

Measurement	Pre-Test (mm)	Post-Test (mm)	% Retention
Left Side	2584	2584	100
Right Side	2584	2584	100
Total	5168	5168	100

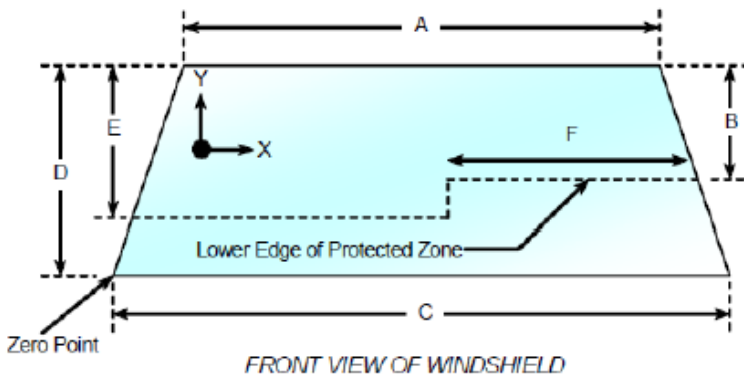

Item	Units	Value
A	mm	1585
B	mm	585
C	mm	1613
D	mm	985
E	mm	635
F	mm	615

AREAS OF PROTECTED ZONE FAILURES

- A. Provide coordinates of the area that the protected zone was penetrated more than .25 inches by a vehicle component other than one that is normally in contact with the windshield.
- No Penetration

X	Y

- B. Provide coordinates of the area beneath the protected zone that the inner surface of the windshield was penetrated by a vehicle component.
- No Penetration

X	Y

DATA SHEET NO. 15 ... (CONTINUED)
SUMMARY OF FMVSS 212, 219 (PARTIAL), AND 301 DATA

Test Vehicle: 2020 Ford Transit Wagon
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200206
Test Date: 1/15/2020

FMVSS 301 FUEL SYSTEM INTEGRITY POST IMPACT DATA

Temperature at Time of Impact: 21 ° C

Test Time: 1:22 PM


STODDARD SOLVENT SPILLAGE MEASUREMENTS

- A. From impact until vehicle motion ceases: 0 oz.
(Maximum allowable is 1 oz.)
- B. For the 5-minute period after motion ceases: 0 oz.
(Maximum allowable is 5 oz.)
- C. For the following 25 minutes: 0 oz.
(Maximum allowable is 1 oz./minute)
- D. Spillage: No Spillage Occurred

DATA SHEET NO. 16
FMVSS 301 STATIC ROLLOVER RESULTS

Test Vehicle: 2020 Ford Transit Wagon
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200206
Test Date: 1/15/2020

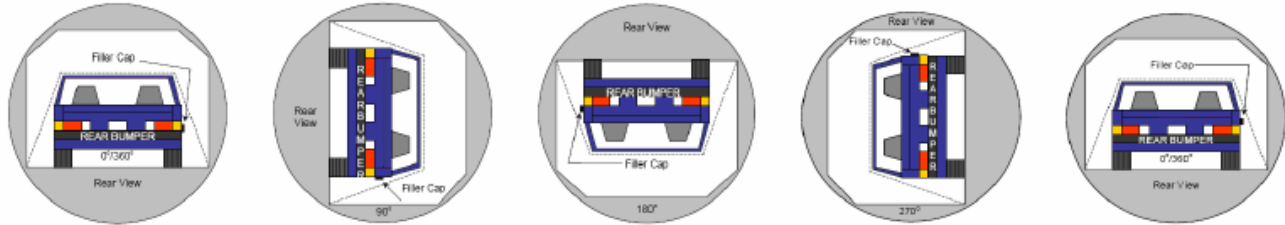

0° TO 90° 90° TO 180° 180° TO 270° 270° TO 360°

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.
2. The position hold time at each position is 300 seconds (minimum).
3. Details of Stoddard Solvent Spillage: No Spillage Occurred

SOLVENT COLLECTION TIME TABLE IN SECONDS

Test Phase	Rotation Time	Hold Time	Total Time
0° to 90°	67	300	367
90° to 180°	66	300	366
180° to 270°	68	300	368
270° to 360°	68	300	368

FMVSS 301 SPILLAGE TABLE

Test Phase	First 5 Minutes	Sixth Minute	Seventh Minute	Eighth Minute
0° to 90°	0	0	0	
90° to 180°	0	0	0	
180° to 270°	0	0	0	
270° to 360°	0	0	0	


SOLVENT SPILLAGE LOCATION TABLE

Test Phase	Spillage Location
0° to 90°	None
90° to 180°	None
180° to 270°	None
270° to 360°	None

DATA SHEET NO. 17
DUMMY / VEHICLE TEMPERATURE STABILIZATION CHART

Test Vehicle: 2020 Ford Transit Wagon
Test Program: NCAP Frontal Barrier Impact Test

NHTSA No.: M20200206
Test Date: 1/15/2020

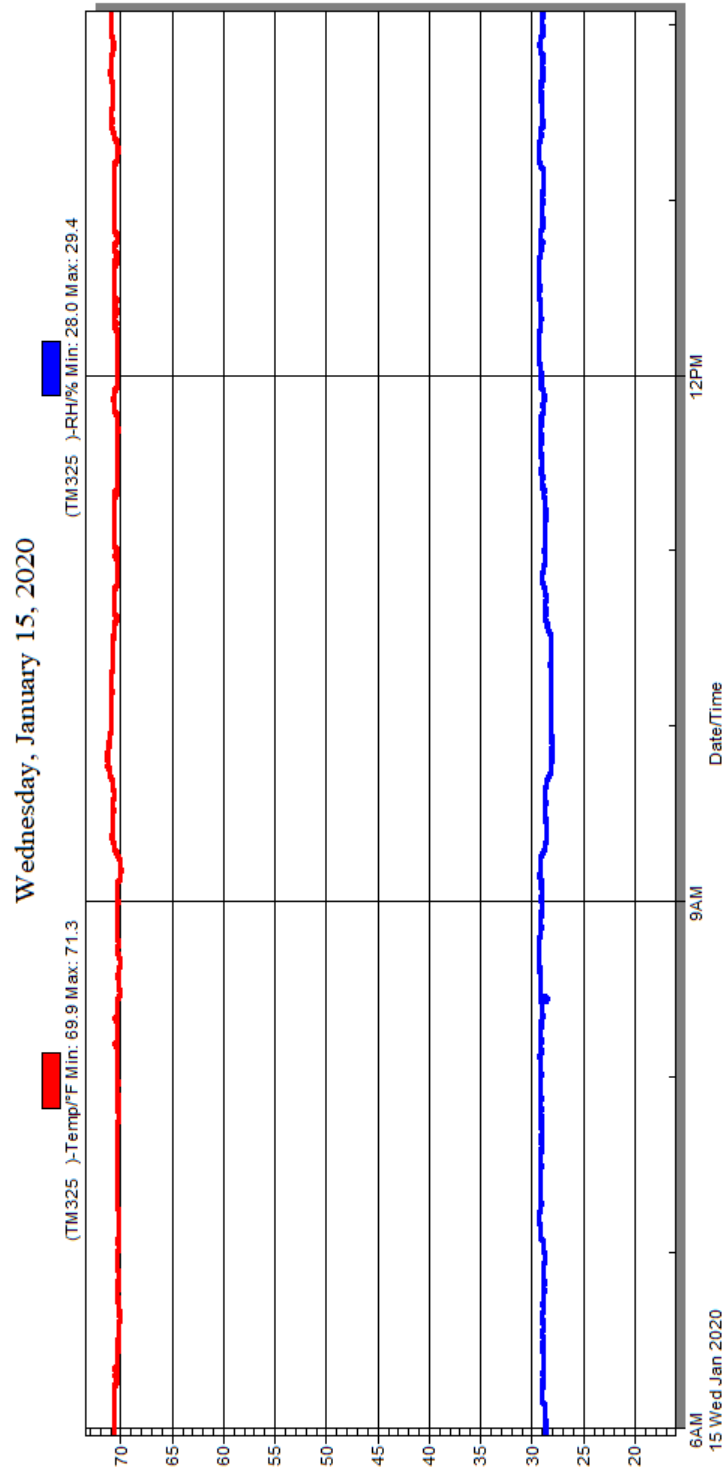

Temperature and Humidity Stabilization Chart/Data for Dummies and Test Vehicle

APPENDIX A
PHOTOGRAPHS

TABLE OF PHOTOGRAPHS

Fig.	Description	Page
1	Load Cell Location	A-5
2	Pre-Test Load Cell Wall	A-5
3	Post-Test Load Cell Wall	A-6
4	Manufacturer's Label	A-6
5	Tire Placard	A-7
6	2020 Ford Transit Frontal As Delivered	A-7
7	Left Rear 3-4 View, as Received	A-8
8	Pre-Test Front View of Test Vehicle	A-8
9	Post-Test Front View of Test Vehicle	A-9
10	Pre-Test Left View of Test Vehicle	A-9
11	Post-Test Left View of Test Vehicle	A-10
12	Pre-Test Right View of Test Vehicle	A-10
13	Post-Test Right View of Test Vehicle	A-11
14	Pre-Test Right Front 3-4 View	A-11
15	Post-Test Right Front 3-4 View	A-12
16	Pre-Test Left Rear 3-4 View	A-12
17	Post-Test Left Rear 3-4 View	A-13
18	Pre-Test Windshield View	A-13
19	Post-Test Windshield View	A-14
20	Pre-Test Engine Compartment View	A-14
21	Post-Test Engine Compartment View	A-15
22	Pre-Test Fuel Filler Cap View	A-15
23	Post-Test Fuel Filler Cap View	A-16
24	Pre-Test Front Underbody View ¹	A-16
25	Post-Test Front Underbody View ¹	A-17
26	Pre-Test Rear Underbody View ¹	A-17
27	Post-Test Rear Underbody View ¹	A-18
28	Pre-Test Dummy Cable Routing	A-18
29	Post-Test Dummy Cable Routing	A-19
30	Pre-Test Driver Dummy Front View	A-19
31	Post-Test Driver Dummy Front View	A-20
32	Pre-Test Driver Dummy Window View	A-20
33	Post-Test Driver Dummy Window View	A-21
34	Pre-Test Driver Dummy and Vehicle Interior View	A-21
35	Post-Test Driver Dummy and Vehicle Interior View	A-22

Fig.	Description	Page
36	Pre-Test Driver's Seat Fore-Aft Markings	A-22
37	Post-Test Driver's Seat Fore-Aft Markings	A-23
38	Pre-Test View of Belt Anchorage for Driver Dummy	A-23
39	Post-Test View of Belt Anchorage for Driver Dummy	A-24
40	Pre-Test View of Belt Buckle and Latch Plate for Driver Dummy	A-24
41	Post-Test View of Belt Buckle and Latch Plate for Driver Dummy	A-25
42	Pre-Test Driver Dummy Feet	A-25
43	Post-Test Driver Dummy Feet	A-26
44	Pre-Test Driver's Side Knee Bolster	A-26
45	Post-Test Driver's Side Knee Bolster	A-27
46	Pre-Test Driver's Side Floorpan	A-27
47	Post-Test Driver's Side Floorpan	A-28
48	Post-Test Driver Dummy Face	A-28
49	Post-Test Driver Dummy Contact With Airbag	A-29
50	Post-Test Driver Dummy Contact With Headrest	A-29
51	Pre-Test View of the Steering Wheel	A-30
52	Post-Test View of the Steering Wheel	A-30
53	Pre-Test Passenger Dummy Front View	A-31
54	Post-Test Passenger Dummy Front View	A-31
55	Pre-Test Passenger Dummy Window View	A-32
56	Post-Test Passenger Dummy Window View	A-32
57	Pre-Test Passenger Dummy and Vehicle Interior View	A-33
58	Post-Test Passenger Dummy and Vehicle Interior View	A-33
59	Pre-Test Passenger's Seat Fore-Aft Markings	A-34
60	Post-Test Passenger's Seat Fore-Aft Markings	A-34
61	Pre-Test View of Belt Anchorage for Passenger Dummy	A-35
62	Post-Test View of Belt Anchorage for Passenger Dummy	A-35
63	Pre-Test View of Belt Buckle and Latch Plate for Passenger Dummy	A-36
64	Post-Test View of Belt Buckle and Latch Plate for Passenger Dummy	A-36
65	Pre-Test Passenger Dummy Feet	A-37
66	Post-Test Passenger Dummy Feet	A-37
67	Pre-Test Passenger's Side Knee Bolster	A-38
68	Post-Test Passenger's Side Knee Bolster	A-38
69	Pre-Test Passenger's Side Floorpan	A-39
70	Post-Test Passenger's Side Floorpan	A-39
71	Post-Test Passenger Dummy Face	A-40

Fig.	Description	Page
72	Post-Test Passenger Dummy Contact With Airbag	A-40
73	Post-Test Passenger Dummy Contact With Headrest	A-41
74	Photograph of Ballast Installed in Vehicle	A-41
75	Post-Test Stoddard Solvent Spillage Location View, if Required	A-42
76	Post-Test Speed Trap Read-Out	A-42
77	Vehicle at 0° on Static Rollover Device	A-43
78	Vehicle at 90° on Static Rollover Device	A-43
79	Vehicle at 180° on Static Rollover Device	A-44
80	Vehicle at 270° on Static Rollover Device	A-44
81	Vehicle at 360° on Static Rollover Device	A-45
82	2020 Ford Transit Frontal Impact Event	A-45
83	Monroney Label Photograph	A-46

¹NOTE: *The underbody views should include the following vehicle components: fuel pump, fuel lines, sender unit, fuel tank filler pipe and any other visible system components.*

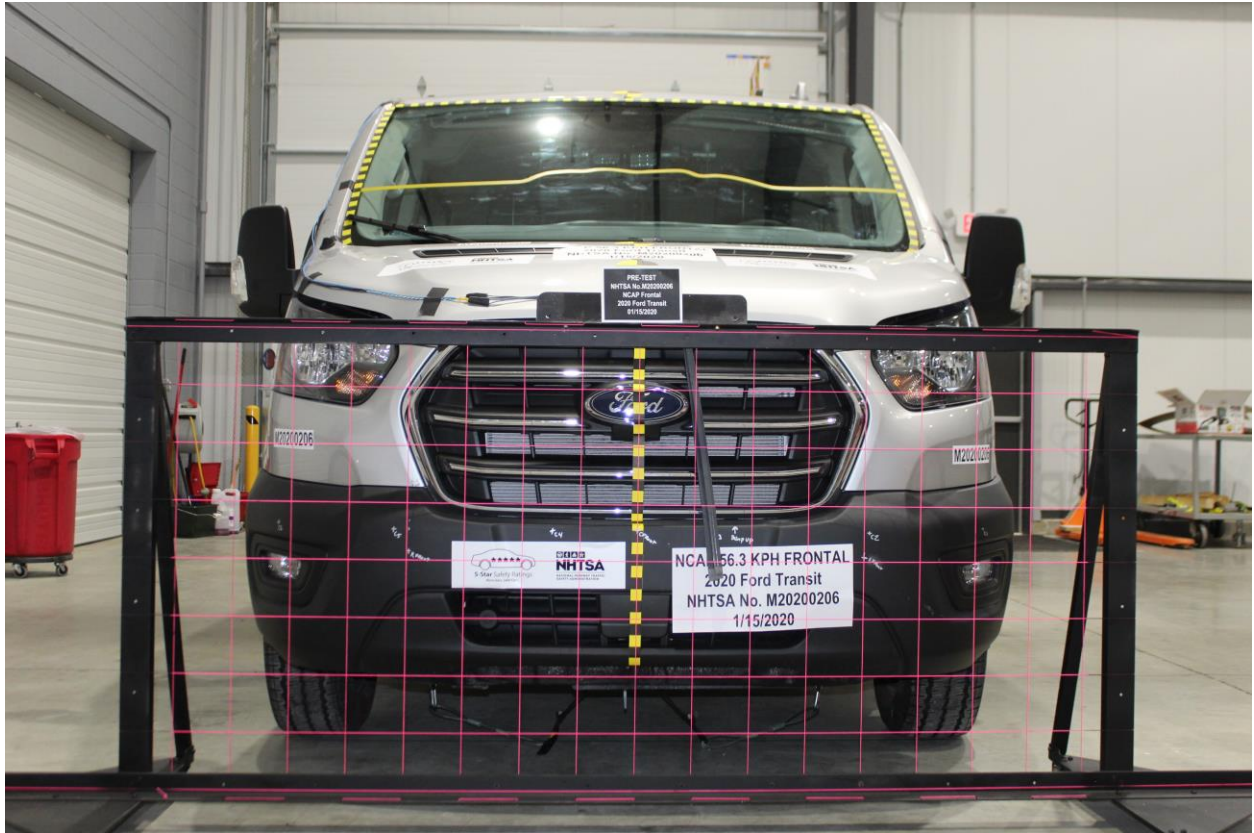


Figure A-1: Load Cell Location



Figure A-2: Pre-Test Load Cell Wall

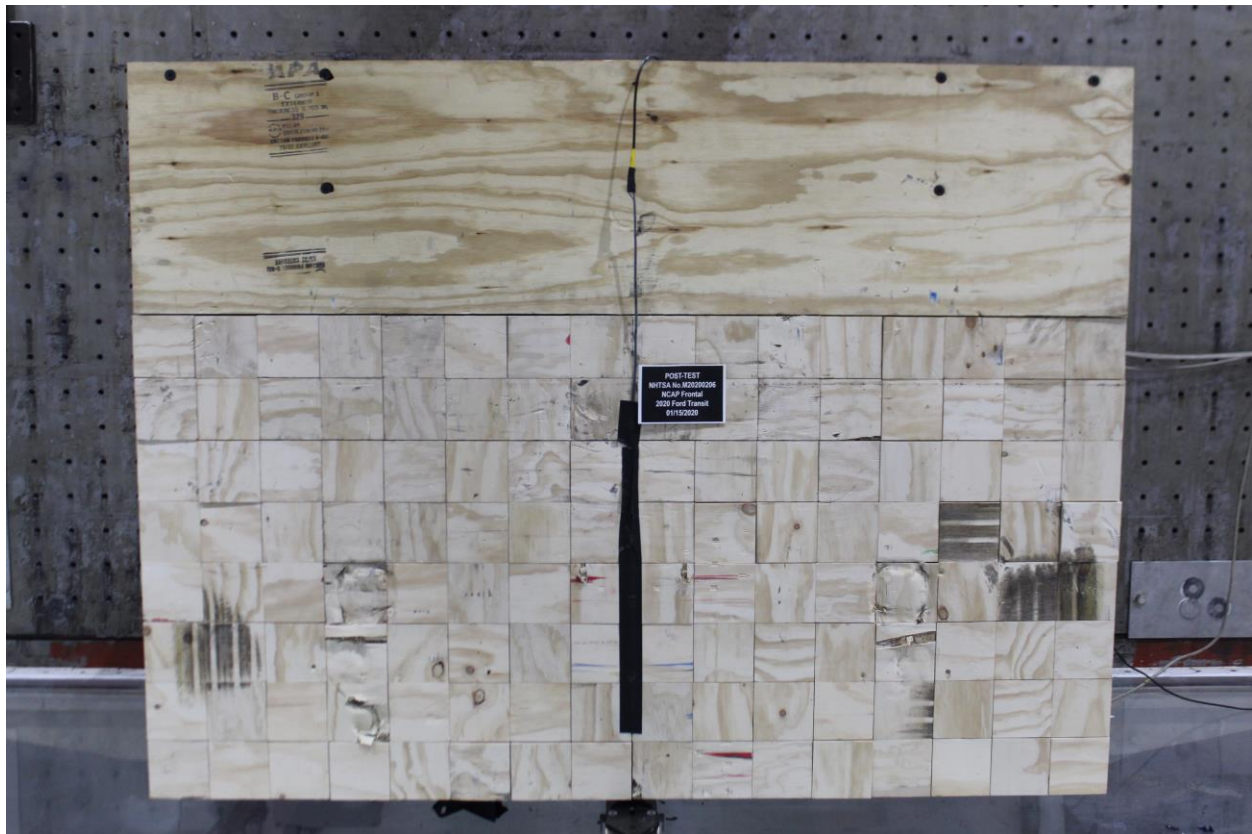


Figure A-3: Post-Test Load Cell Wall



Figure A-4: Manufacturer's Label

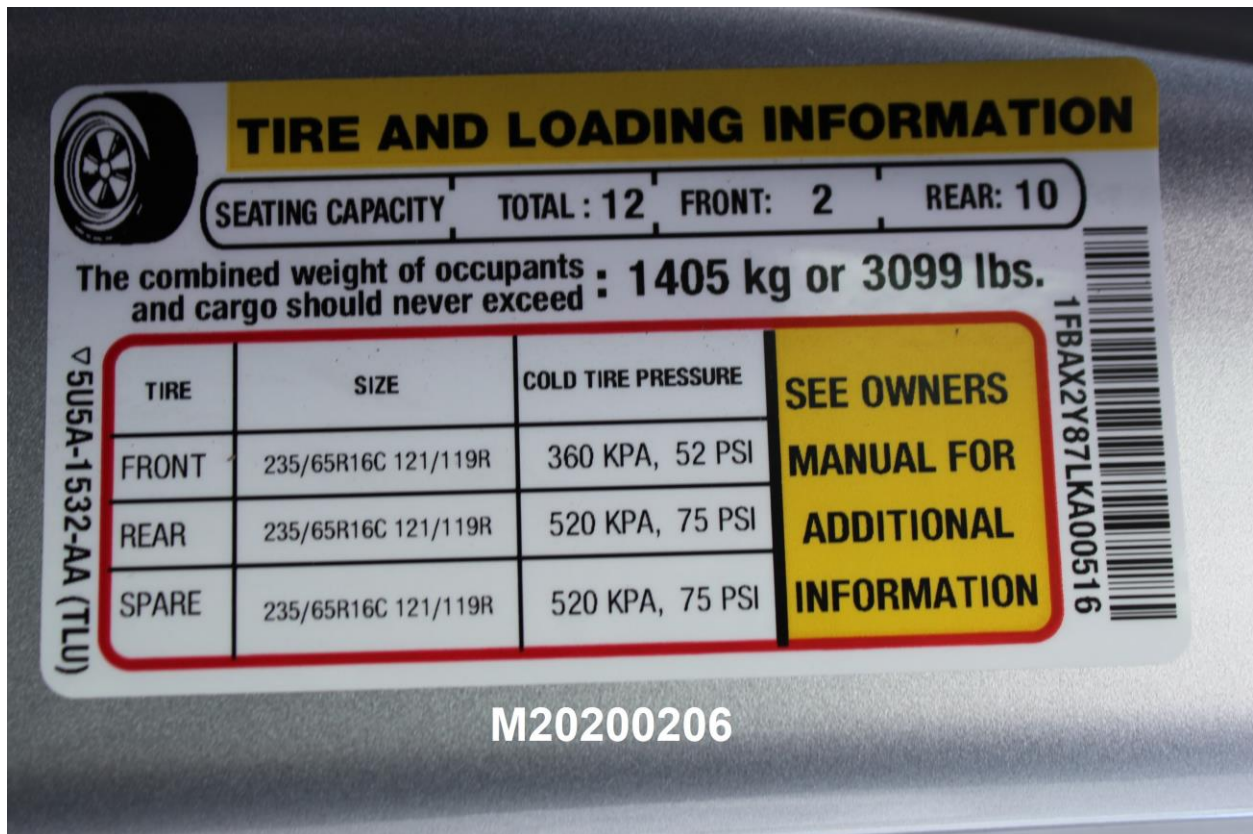


Figure A-5: Tire Placard



Figure A-6: 2020 Ford Transit Frontal As Delivered



Figure A-7: Left Rear 3-4 View, As Received



Figure A-8: Pre-Test Front View of Test Vehicle



Figure A-9: Post-Test Front View of Test Vehicle



Figure A-10: Pre-Test Left View of Test Vehicle



Figure A-11: Post-Test Left View of Test Vehicle



Figure A-12: Pre-Test Right View of Test Vehicle



Figure A-13: Post-Test Right View of Test Vehicle



Figure A-14: Pre-Test Right Front 3-4 View



Figure A-15: Post-Test Right Front 3-4 View



Figure A-16: Pre-Test Left Rear 3-4 View



Figure A-17: Post-Test Left Rear 3-4 View



Figure A-18: Pre-Test Windshield View



Figure A-19: Post-Test Windshield View

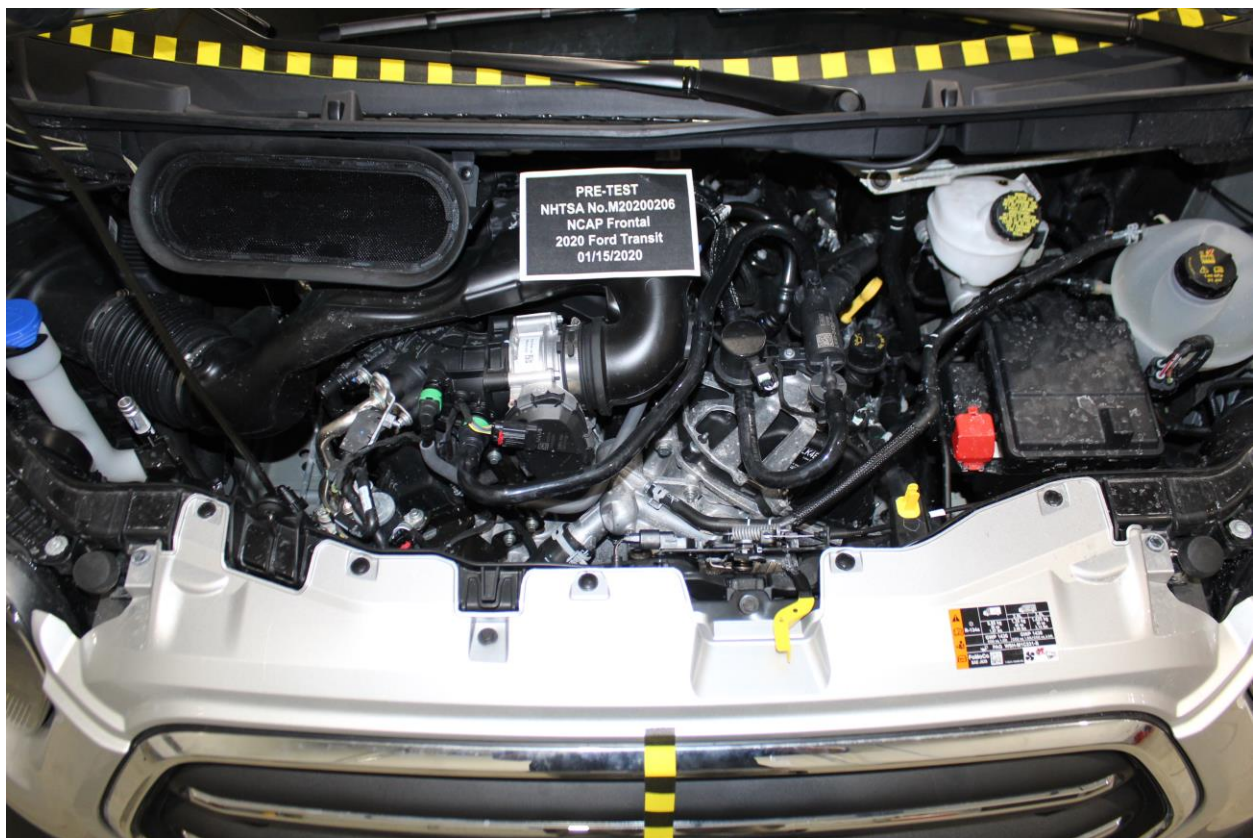


Figure A-20: Pre-Test Engine Compartment View

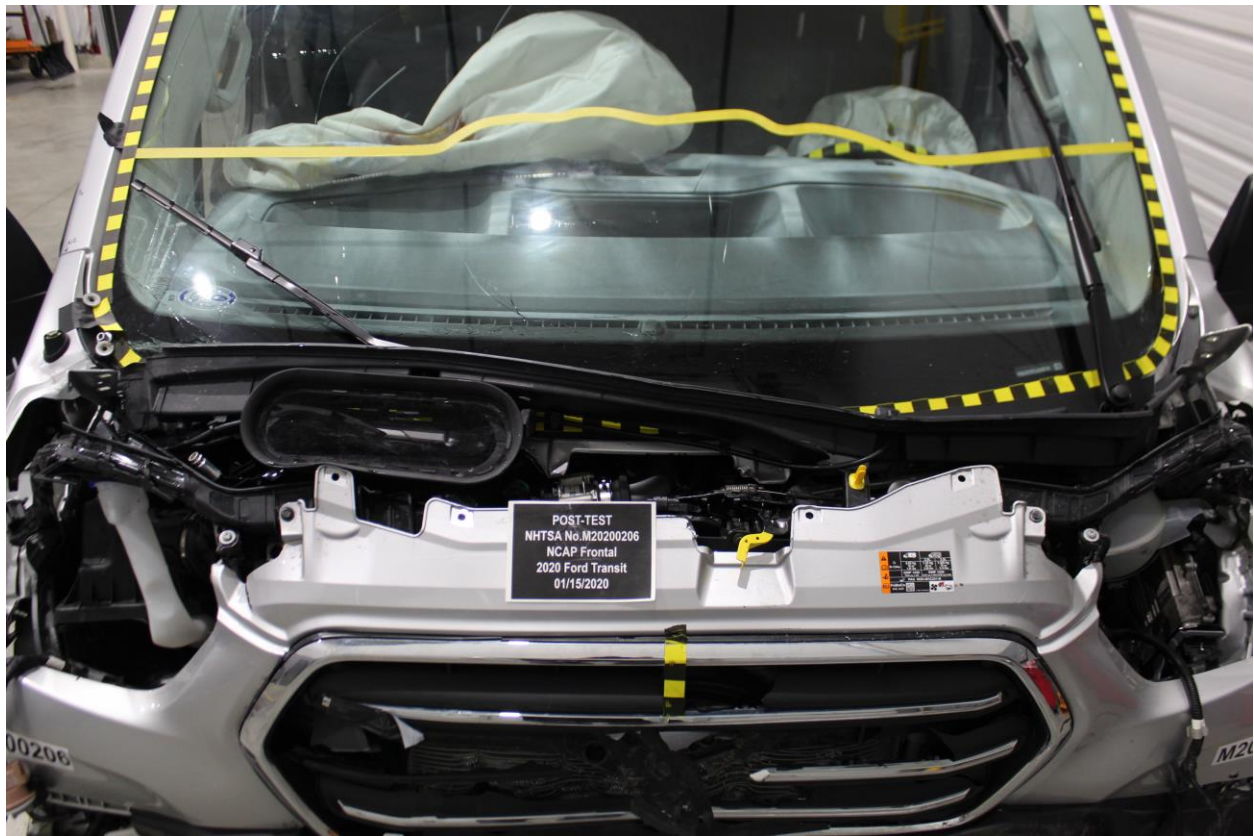


Figure A-21: Post-Test Engine Compartment View



Figure A-22: Pre-Test Fuel Filler Cap View



Figure A-23: Post-Test Fuel Filler Cap View



Figure A-24: Pre-Test Front Underbody View

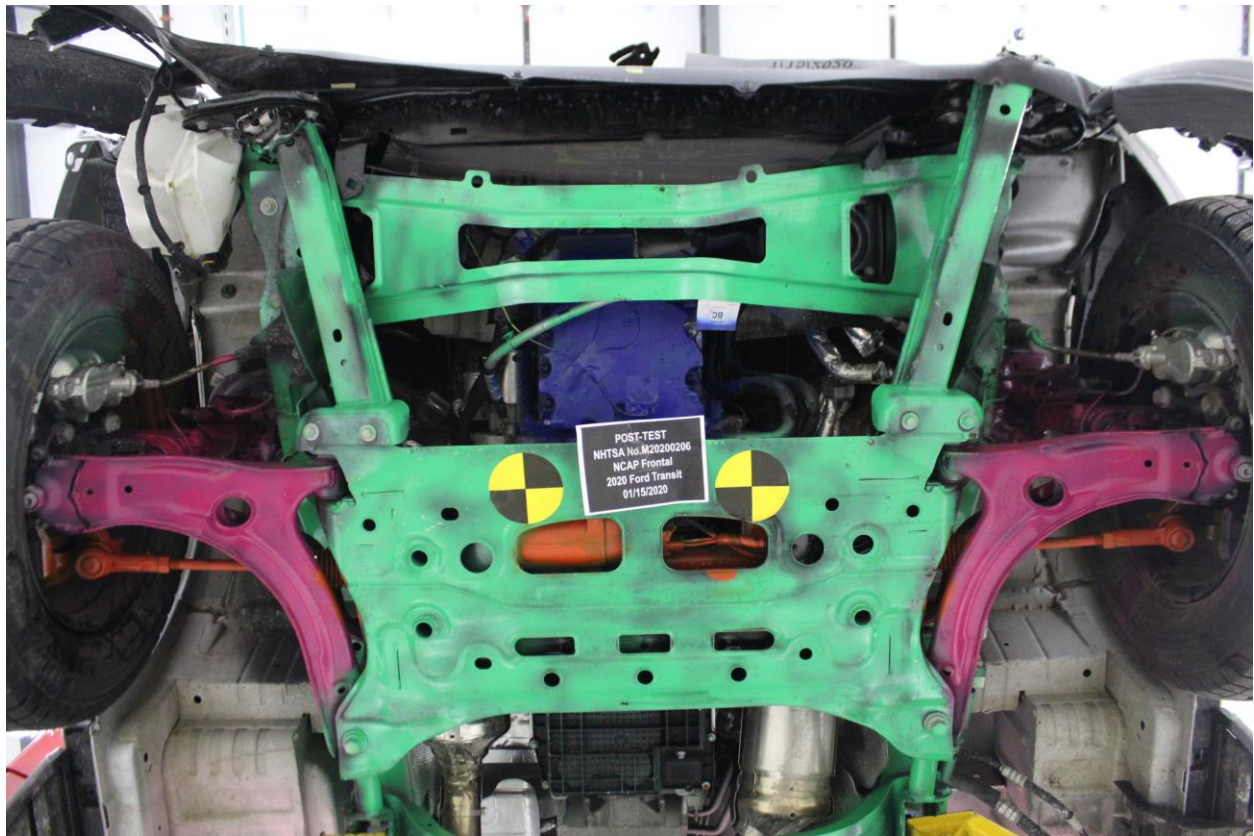


Figure A-25: Post-Test Front Underbody View

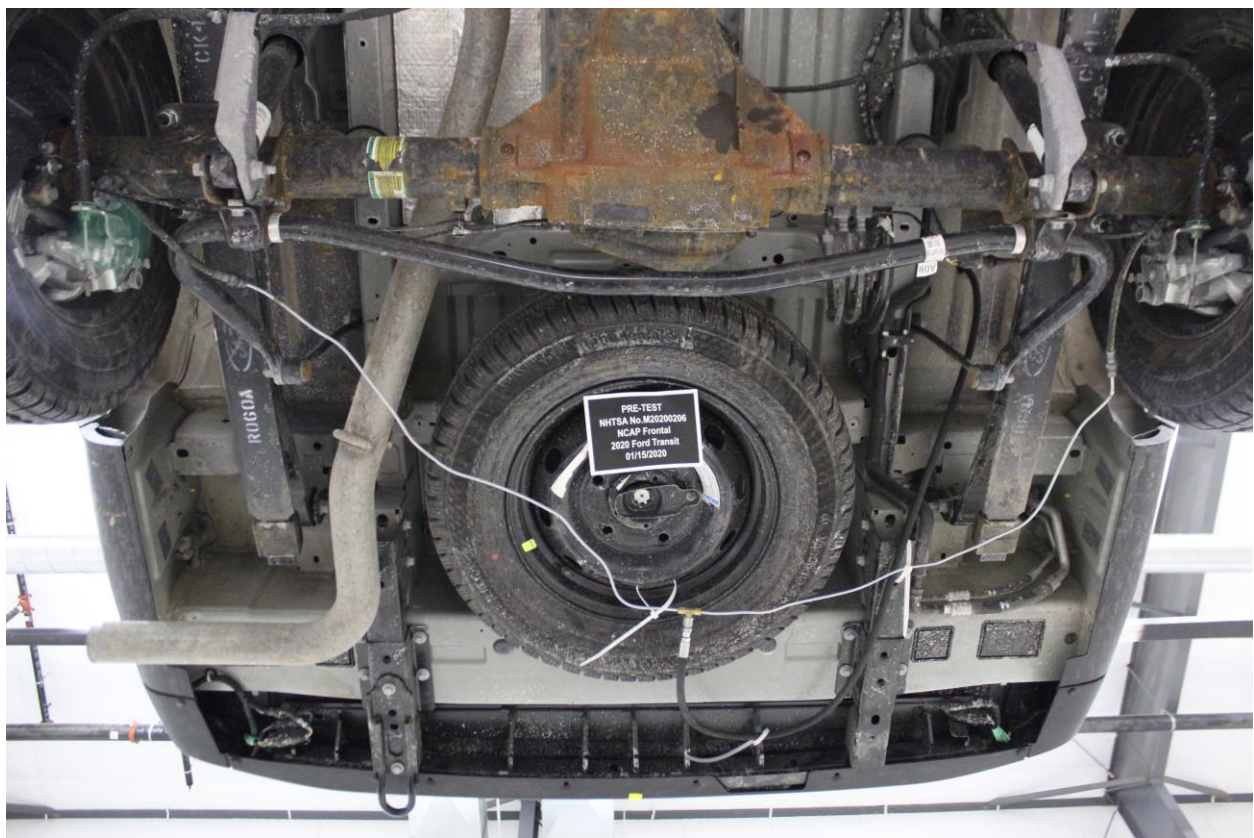


Figure A-26: Pre-Test Rear Underbody View



Figure A-27: Post-Test Rear Underbody View



Figure A-28: Pre-Test Dummy Cable Routing



Figure A-29: Post-Test Dummy Cable Routing



Figure A-30: Pre-Test Driver Dummy Front View



Figure A-31: Post-Test Driver Dummy Front View



Figure A-32: Pre-Test Driver Dummy Window View



Figure A-33: Post-Test Driver Dummy Window View



Figure A-34: Pre-Test Driver Dummy and Vehicle Interior View



Figure A-35: Post-Test Driver Dummy and Vehicle Interior View



Figure A-36: Pre-Test Driver's Seat Fore-Aft Markings



Figure A-37: Post-Test Driver's Seat Fore-Aft Markings

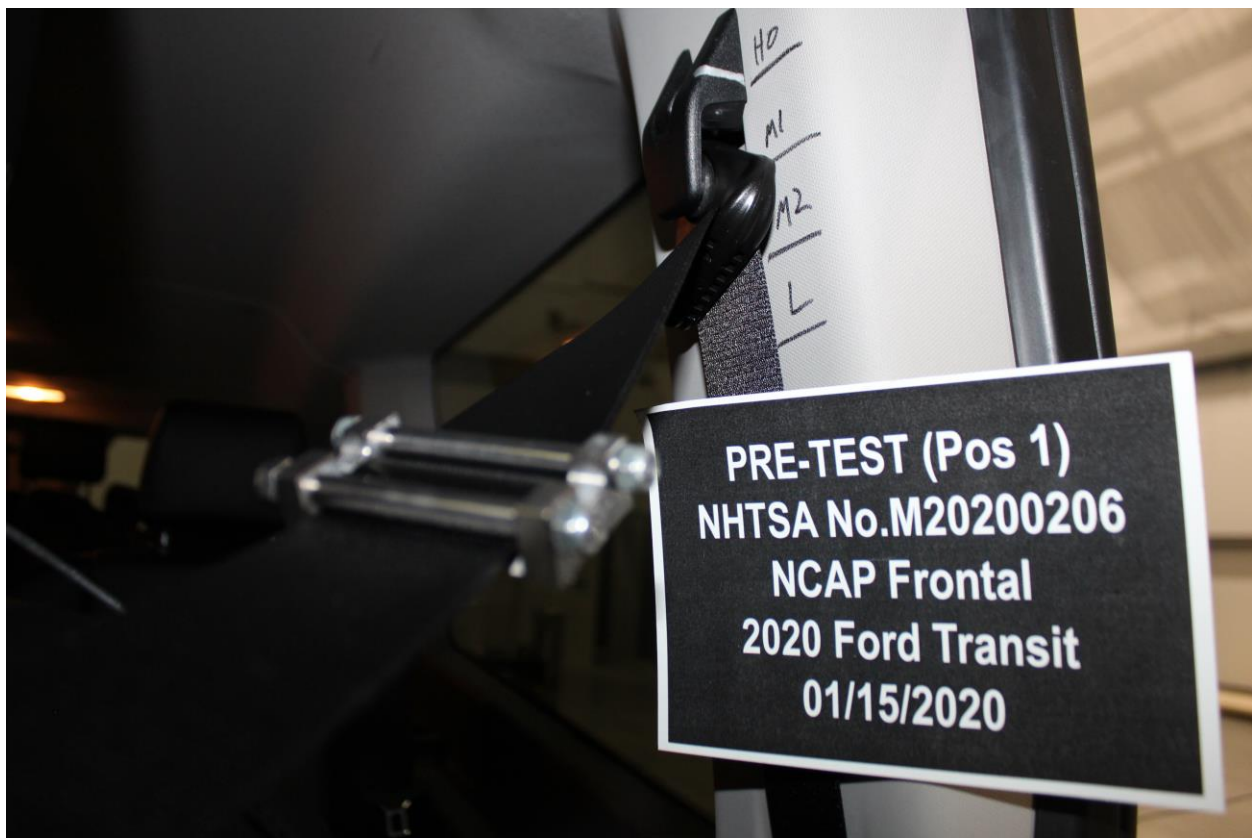


Figure A-38: Pre-Test View of Belt Anchorage for Driver Dummy



Figure A-39: Post-Test View of Belt Anchorage for Driver Dummy



Figure A-40: Pre-Test View of Belt Buckle and Latch Plate for Driver Dummy



Figure A-41: Post-Test View of Belt Buckle and Latch Plate for Driver Dummy



Figure A-42: Pre-Test Driver Dummy Feet



Figure A-43: Post-Test Driver Dummy Feet



Figure A-44: Pre-Test Driver's Side Knee Bolster



Figure A-45: Post-Test Driver's Side Knee Bolster



Figure A-46: Pre-Test Driver's Side Floorpan



Figure A-47: Post-Test Driver's Side Floorpan

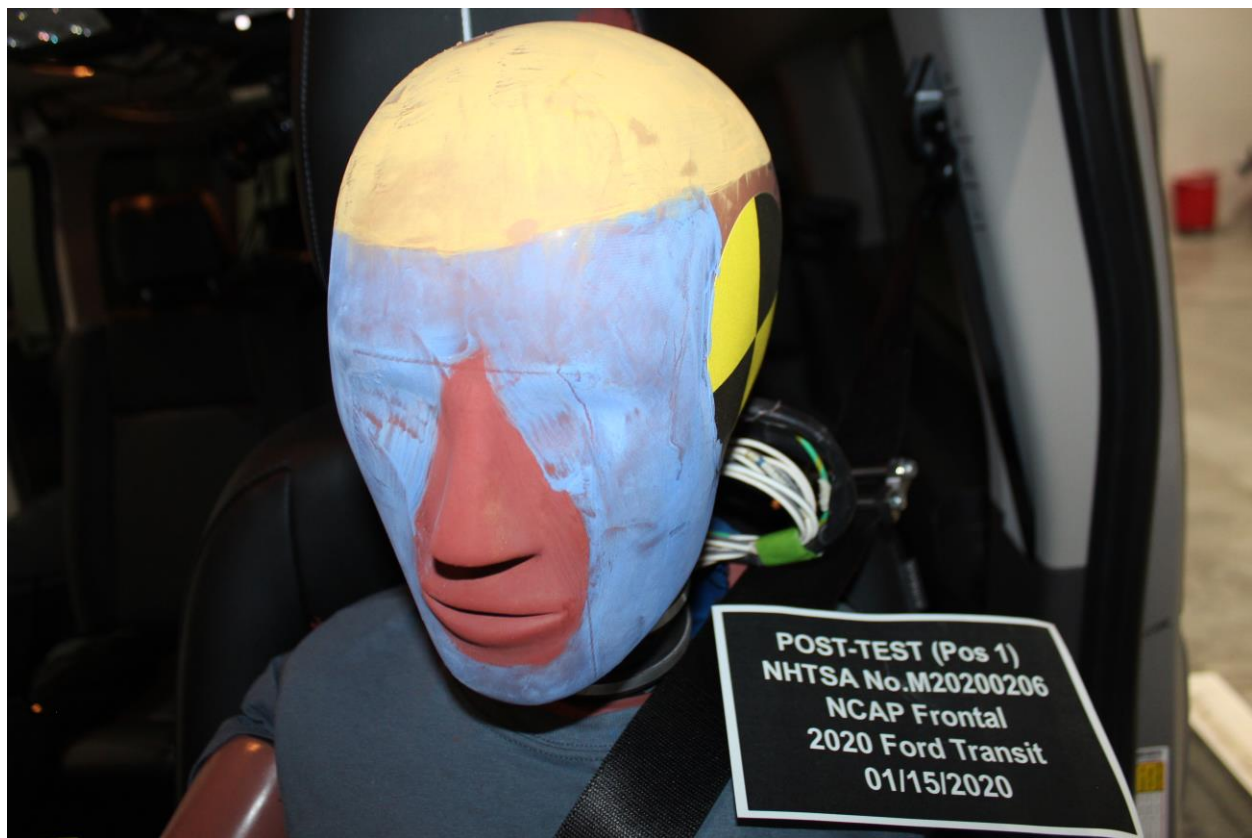


Figure A-48: Post-Test Driver Dummy Face



Figure A-49: Post-Test Driver Dummy Contact With Airbag



Figure A-50: Post-Test Driver Dummy Contact With Headrest



Figure A-51: Pre-Test View of the Steering Wheel



Figure A-52: Post-Test View of the Steering Wheel

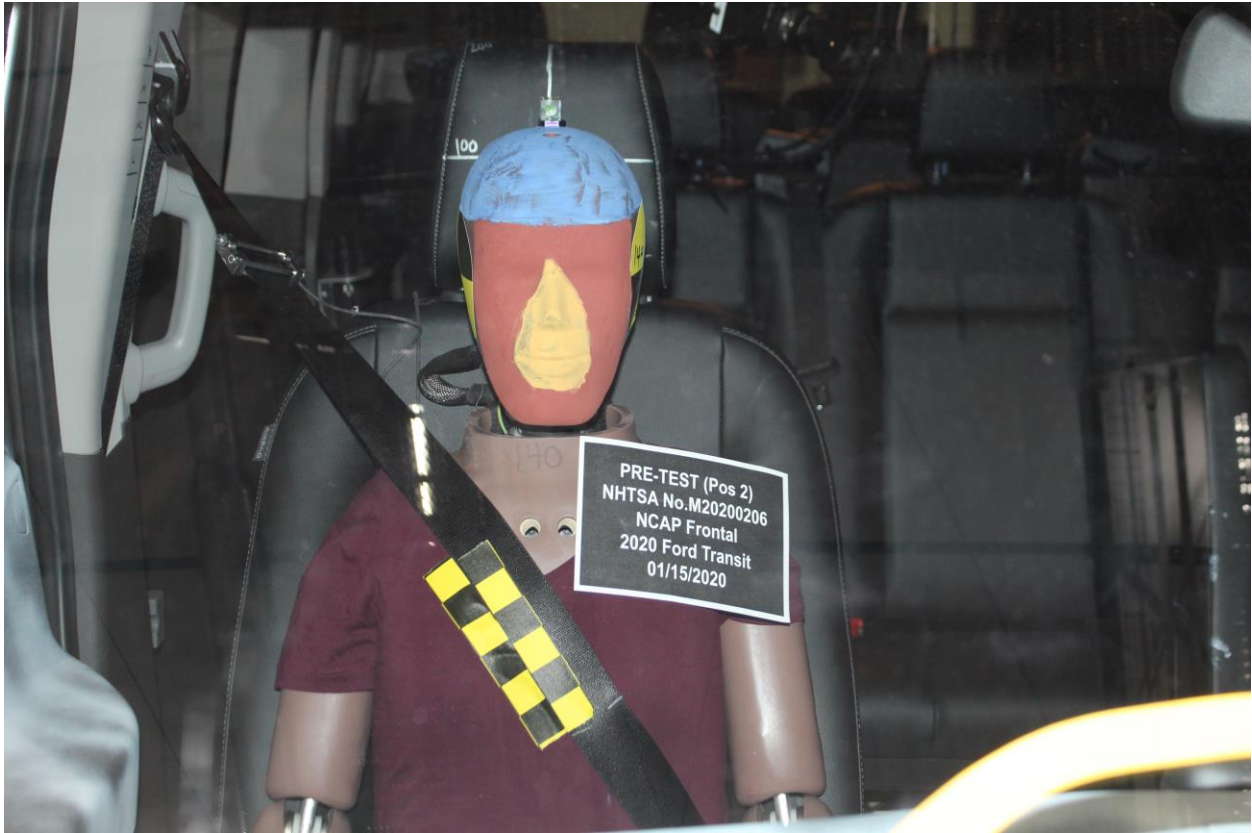


Figure A-53: Pre-Test Passenger Dummy Front View



Figure A-54: Post-Test Passenger Dummy Front View



Figure A-55: Pre-Test Passenger Dummy Window View



Figure A-56: Post-Test Passenger Dummy Window View



Figure A-57: Pre-Test Passenger Dummy and Vehicle Interior View



Figure A-58: Post-Test Passenger Dummy and Vehicle Interior View



Figure A-59: Pre-Test Passenger's Seat Fore-Aft Markings

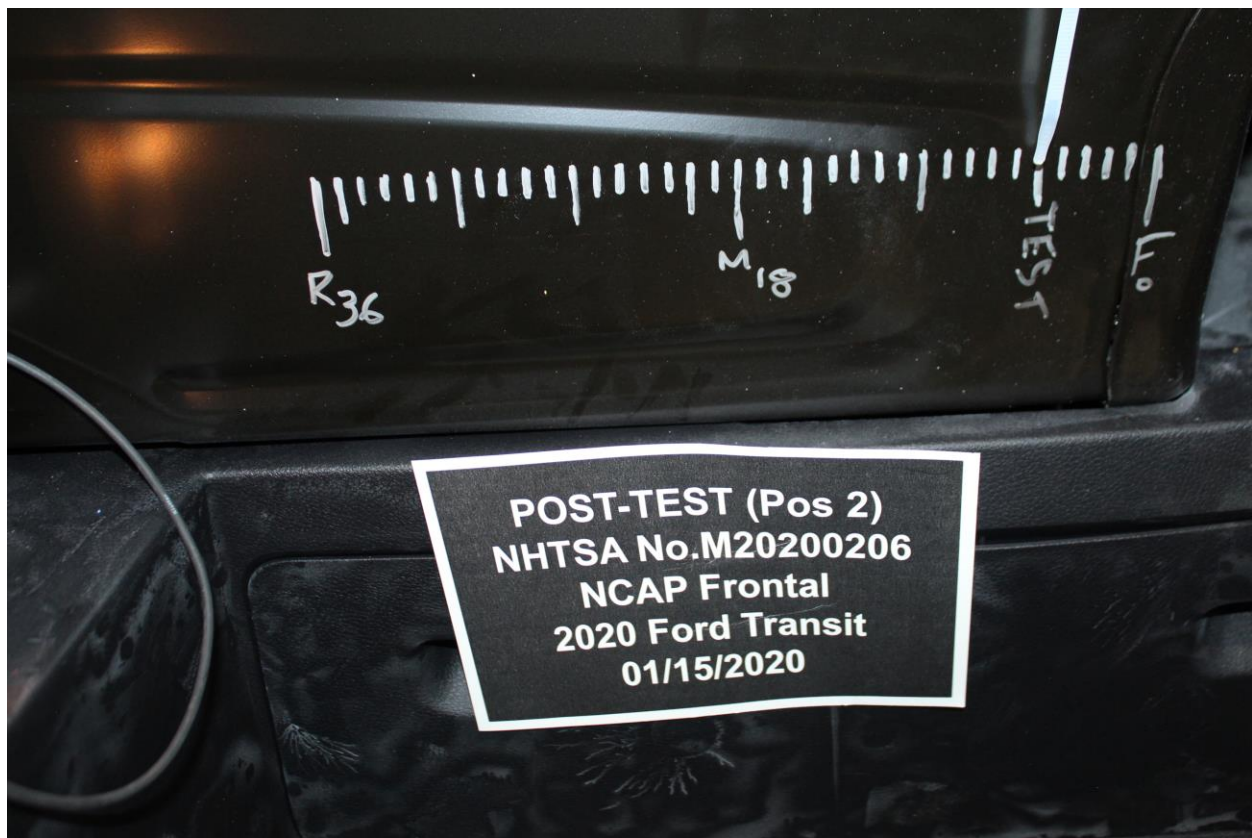


Figure A-60: Post-Test Passenger's Seat Fore-Aft Markings



Figure A-61: Pre-Test View of Belt Anchorage for Passenger Dummy



Figure A-62: Post-Test View of Belt Anchorage for Passenger Dummy

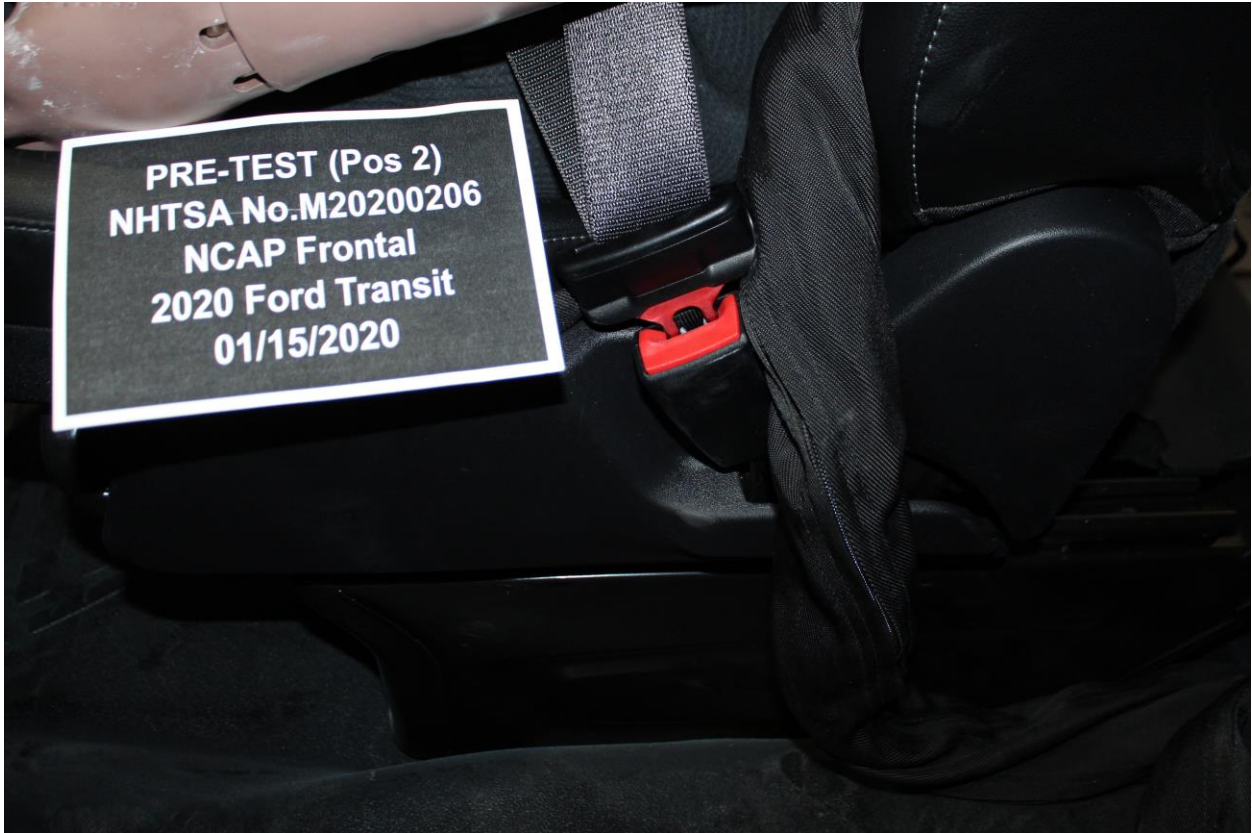


Figure A-63: Pre-Test View of Belt Buckle and Latch Plate for Passenger Dummy



Figure A-64: Post-Test View of Belt Buckle and Latch Plate for Passenger Dummy

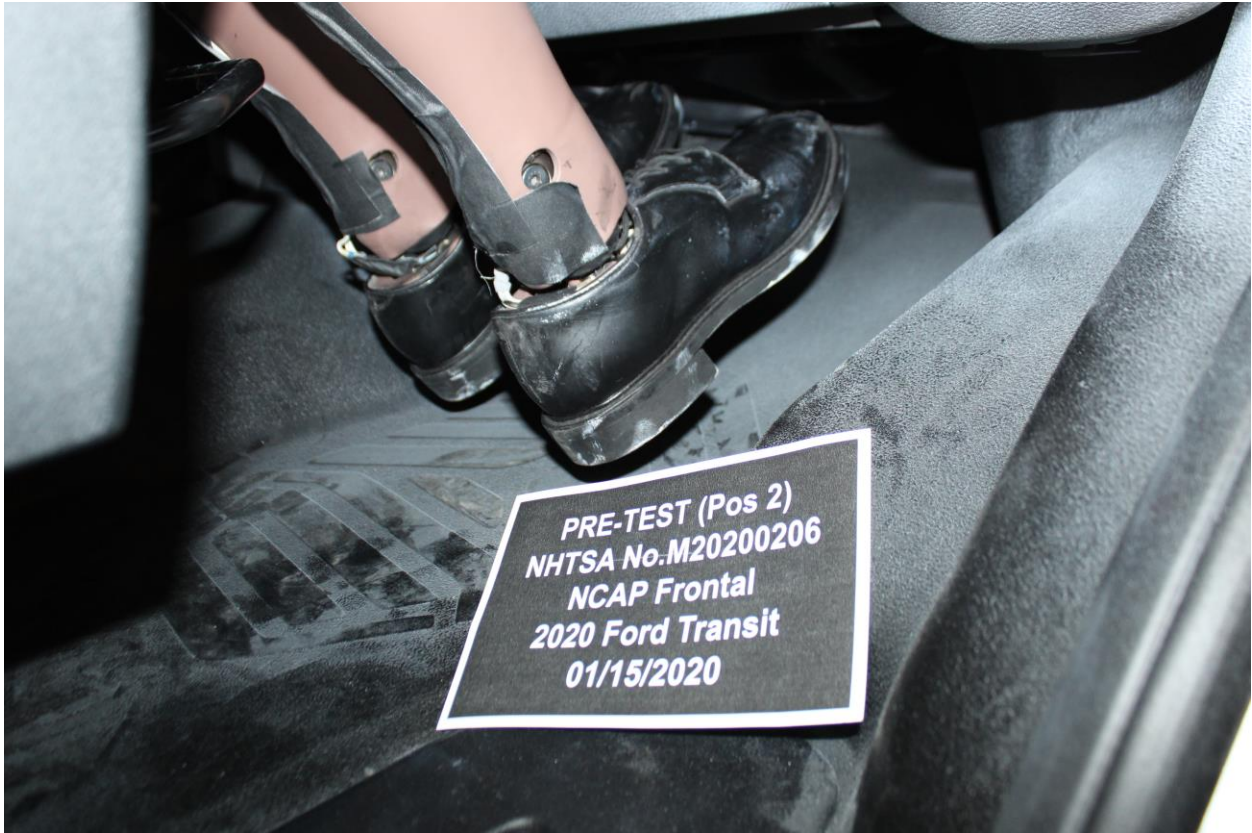


Figure A-65: Pre-Test Passenger Dummy Feet



Figure A-66: Post-Test Passenger Dummy Feet



Figure A-67: Pre-Test Passenger's Side Knee Bolster



Figure A-68: Post-Test Passenger's Side Knee Bolster



Figure A-69: Pre-Test Passenger's Side Floorpan



Figure A-70: Post-Test Passenger's Side Floorpan



Figure A-71: Post-Test Passenger Dummy Face



Figure A-72: Post-Test Passenger Dummy Contact With Airbag

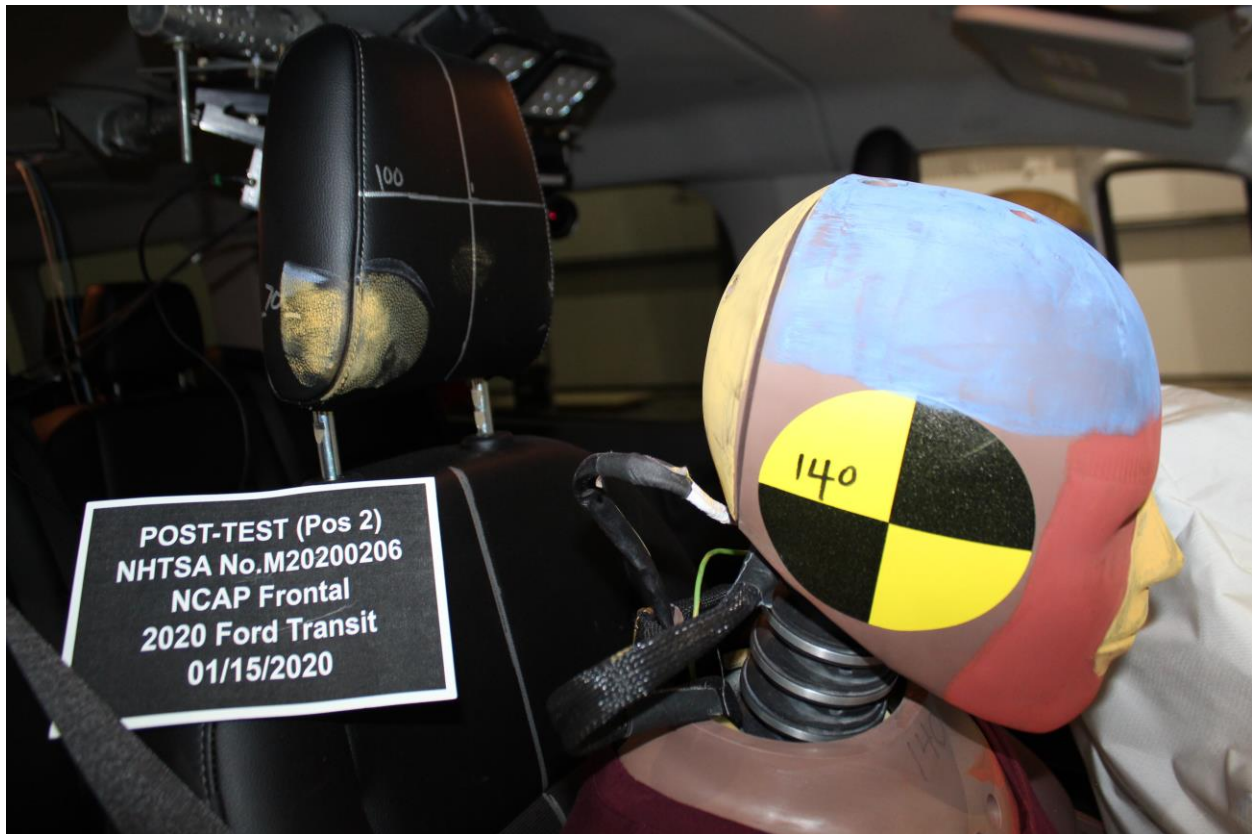


Figure A-73: Post-Test Passenger Dummy Contact With Headrest



Figure A-74: Photograph of Ballast Installed in Vehicle

Photo Not Applicable

Figure A-75: Post-Test Stoddard Solvent Spillage Location View, If Required



Figure A-76: Post-Test Speed Trap Read-Out



Figure A-77: Vehicle at 0° on Static Rollover Device




Figure A-78: Vehicle at 90° on Static Rollover Device



Figure A-81: Vehicle at 360° on Static Rollover Device



Figure A-82: 2020 Ford Transit Frontal Impact Event



Go Further
ford.com

VEHICLE DESCRIPTION

TRANSIT

2020 350 LR PASS XL RWD
XL TRIM
3.5L PFDI V6 (GAS)
10-SPEED TRANSMISSION

EXTERIOR
INGOT SILVER METALLIC
INTERIOR
DARK PALAZZO GRAY

LK A005

Health and Environment

ECONOMY RATINGS NOT REQUIRED ON THIS VEHICLE

STANDARD EQUIPMENT INCLUDED AT NO EXTRA CHARGE

EXTERIOR	INTERIOR	FUNCTIONAL	SAFETY/SECURITY
<ul style="list-style-type: none"> AUXILIARY FUEL PORT BUMPERS - CARBON BLACK DOORS - CARDO BEAR W/ 253-DEGREE SWING-OUT FULL SIZE SPARE TIRE/WHEEL WIPERS - RAIN-SENSING 	<ul style="list-style-type: none"> AIR CONDITIONING ASSIST HANDLES - A-PILLAR ASSIST HANDLE - B-PILLAR CENTER CONSOLE W/STORAGE LOCKING GLOVE BOX POWERPOINT - 12V (FRONT) STEERING - TILT/TELESCOPIC WHEEL WITH AUDIO 	<ul style="list-style-type: none"> AUTO HIGH-BEAM HEADLAMPS ELECTRONIC PWR ASST STEER FORDPASS™ CONNECT 40WIFI HOTSPOT TELEMATICS MODEM FORWARD COLLISION WARNING HILL START ASSIST LANE-KEEPING SYSTEM POST-COLLISION BRAKING PRE-COLLISION ASSIST W/AEB REAR VIEW CAMERA W/ TRAILER HITCH ASSIST SELECTABLE DRIVE MODES USB PORTS - 5 AMP 	<ul style="list-style-type: none"> 3-POINT SAFETY BELTS ADVANCEDTRAC® WITH RSCD AIRBAGS (FRONT, SIDE AND SAFETY CANOPY) SYSTEM BRAKES - IN-HEEL, DISC W/ABS SECURELOCK® ANTI-THEFT SYS™ TIRE PRESSURE MONIT SYS™

WARRANTY

- 5YR/60,000 BUMPER / BUMPER
- 5YR/100,000 DIESEL ENGINE
- 5YR/60,000 POWERTRAIN
- 5YR/60,000 ROADSIDE ASSIST

INCLUDED ON THIS VEHICLE

OPTIONAL EQUIPMENT/OTHER	(MSRP)
2020 MODEL YEAR	
INGOT SILVER METALLIC	200.00
PREFERRED EQUIPMENT PKG.301A	
3.73 LIMITED SLIP AXLE	325.00
FRONT LICENSE PLATE BRACKET	NO CHARGE
9250# GVWR PACKAGE	NO CHARGE
2WAY DR/PASS PALAZZO VINYL	NO CHARGE
50 STATE EMISSIONS	NO CHARGE
REVERSE SENSING SYSTEM	295.00
FRONT FOG LAMPS	NO CHARGE
REAR-WINDOW DEFROSTER	NO CHARGE
RADIO - SYNC3, 4" SCN	285.00
CRUISE CONTROL	325.00
BLIS W/ CROSS-TRAFFIC ALERT	595.00
EXTND LENGTH RUNNING BOARDS	655.00
2 ADDITIONAL KEYS	75.00
PRIVACY GLASS	875.00
E-85 FLEX FUEL CAPABLE	NO CHARGE

PRICE INFORMATION

(MSRP)
BASE PRICE
TOTAL OPTIONS/OTHER
TOTAL VEHICLE & OPTIONS/OTHER
DESTINATION & DELIVERY

GOVERNMENT 5-STAR SAFETY RATINGS

Overall Vehicle Score Not Rated

Based on the combined ratings of frontal, side and rollover. Should ONLY be compared to other vehicles of similar size and weight.

Frontal Crash	Driver Passenger	Not Rated
Not Rated	Not Rated	Not Rated

Based on the risk of injury in a frontal impact.

Side Crash	Front seat	Rear seat
Not Rated	★★★★★	★★★★★

Based on the risk of injury in a side impact.

Rollover ★★★

Based on the risk of rollover in a single-vehicle crash.

Star ratings range from 1 to 5 stars (★★★★★), with 5 being the highest. Source: National Highway Traffic Safety Administration (NHTSA). www.safercar.gov or 1-888-327-4238

fueleconomy.gov

Calculate personalized estimates and compare vehicles

FordPass Connect™

Download the FordPass™ app* and you can:

- Access Vehicle Control Features
- Remotely start, lock and unlock your vehicle.
- Locate your vehicle and check approximate fuel range.
- Receive vehicle health alerts.

Activate 4G LTE Wi-Fi Hotspot

- New vehicles include 3-month or 3GB data (whichever comes first) Wi-Fi trial.
- Connect up to ten Wi-Fi-equipped devices.

FORD PROTECT™

Insist on Ford Protect! The only extended service plan fully backed by Ford and honored at every Ford dealership in the U.S., Canada and Mexico. See your Ford dealer or visit www.FordProtect.com.

WARNING: Operating, servicing and maintaining a passenger vehicle, pickup truck, van, or off-road vehicle can expose you to chemicals including engine exhaust, carbon monoxide, phthalates, and lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. To minimize exposure, avoid breathing exhaust, do not idle the engine except as necessary, service your vehicle in a well-ventilated area and wear gloves or wash your hands frequently when servicing your vehicle. For more information go to www.P60Warnings.ca.gov/passenger-vehicle.

SOLD TO Schultz Ford
85 Route 304
Nanuet, NY 10954

RAMP ONE 13D 465
CV2G

FINAL ADDRESS / PLANT KANSAS CITY

TOTAL MSRP \$45,955.00

SHIP TO (IF OTHER THAN SOLD TO) 13-1045 Q1T 2


SHIP THROUGH

This label is affixed pursuant to the Federal Automobile Information Disclosure Act. Gasoline, License, and Title Fees, State and Local taxes are not included. Dealer installed options or accessories are not included unless listed above.

Whether you decide to lease or finance your vehicle, you'll find the choices that are right for you. See your dealer for details or visit www.ford.com/finance.

KL082 R RB X 015 000041 11 08 19

1FBAX2Y87LKA00516



FORD CREDIT

Figure A-83: Monroney Label Photograph

APPENDIX B
VEHICLE & DUMMY RESPONSE DATA TRACES

Table of Data Plots





No.	Description	Page
Plot 1	Driver Head X Acceleration vs. Time Primary	B-5
Plot 2	Driver Head Y Acceleration vs. Time Primary	B-5
Plot 3	Driver Head Z Acceleration vs. Time Primary	B-5
Plot 4	Driver Head Resultant Acceleration vs. Time Primary	B-5
Plot 5	Driver Chest X Deflection vs. Time	B-6
Plot 6	Driver Chest X Acceleration vs. Time Primary	B-6
Plot 7	Driver Chest Y Acceleration vs. Time Primary	B-6
Plot 8	Driver Chest Z Acceleration vs. Time Primary	B-6
Plot 9	Driver Chest Resultant Acceleration vs. Time Primary	B-7
Plot 10	Driver Upper Neck Force X vs. Time Primary	B-7
Plot 11	Driver Upper Neck Force Z vs. Time Primary	B-7
Plot 12	Driver Upper Neck Moment Y vs. Time Primary	B-7
Plot 13	Driver Nij vs. Time Primary	B-8
Plot 14	Driver Left Femur Force vs. Time	B-8
Plot 15	Driver Right Femur Force vs. Time	B-8
Plot 16	Passenger Head X Acceleration vs. Time Primary	B-8
Plot 17	Passenger Head Y Acceleration vs. Time Primary	B-9
Plot 18	Passenger Head Z Acceleration vs. Time Primary	B-9
Plot 19	Passenger Head Resultant Acceleration vs. Time Primary	B-9
Plot 20	Passenger Chest X Deflection vs. Time	B-9
Plot 21	Passenger Chest X Acceleration vs. Time Primary	B-10
Plot 22	Passenger Chest Y Acceleration vs. Time Primary	B-10
Plot 23	Passenger Chest Z Acceleration vs. Time Primary	B-10
Plot 24	Passenger Chest Resultant Acceleration vs. Time Primary	B-10
Plot 25	Passenger Upper Neck Force X vs. Time Primary	B-11
Plot 26	Passenger Upper Neck Force Z vs. Time Primary	B-11
Plot 27	Passenger Upper Neck Moment Y vs. Time Primary	B-11
Plot 28	Passenger Nij vs. Time Primary	B-11
Plot 29	Passenger Left Femur Force vs. Time	B-12
Plot 30	Passenger Right Femur Force vs. Time	B-12





The following additional dummy and vehicle response data can be found in the R&D section of the NHTSA website at www.nhtsa.gov

Driver Head X Acceleration Redundant
 Driver Head Y Acceleration Redundant
 Driver Head Z Acceleration Redundant
 Driver Upper Neck Force Y
 Driver Upper Neck Moment X
 Driver Upper Neck Moment Z
 Driver Chest X Acceleration Redundant
 Driver Chest Y Acceleration Redundant
 Driver Chest Z Acceleration Redundant
 Driver Pelvis X
 Driver Pelvis Y
 Driver Pelvis Z
 Driver Left Femur Redundant
 Driver Right Femur Redundant
 Driver Left Upper Tibia Moment X
 Driver Left Upper Tibia Moment Y


Driver Left Upper Tibia Force Z
Driver Left Lower Tibia Moment X
Driver Left Lower Tibia Moment Y
Driver Left Lower Tibia Force Z
Driver Right Upper Tibia Moment X
Driver Right Upper Tibia Moment Y
Driver Right Upper Tibia Force Z
Driver Right Lower Tibia Moment X
Driver Right Lower Tibia Moment Y
Driver Right Lower Tibia Force Z
Driver Left Foot Fore Z
Driver Left Foot Aft X
Driver Left Foot Aft Z
Driver Right Foot Fore Z
Driver Right Foot Aft X
Driver Right Foot Aft Z
Driver Shoulder Belt Force
Driver Lap Belt Force
Driver Head Angular Velocity X
Driver Head Angular Velocity Y
Driver Head Angular Velocity Z
Passenger Head X Acceleration Redundant
Passenger Head Y Acceleration Redundant
Passenger Head Z Acceleration Redundant
Passenger Upper Neck Force X
Passenger Upper Neck Force Z
Passenger Upper Neck Moment Y
Passenger Chest X Acceleration Redundant
Passenger Chest Y Acceleration Redundant
Passenger Chest Z Acceleration Redundant
Passenger Pelvis X
Passenger Pelvis Y
Passenger Pelvis Z
Passenger Left Femur Redundant
Passenger Right Femur Redundant
Passenger Left Upper Tibia Moment X
Passenger Left Upper Tibia Moment Y
Passenger Left Upper Tibia Force Z
Passenger Left Lower Tibia Moment X
Passenger Left Lower Tibia Moment Y
Passenger Left Lower Tibia Force Z
Passenger Right Upper Tibia Moment X
Passenger Right Upper Tibia Moment Y
Passenger Right Upper Tibia Force Z
Passenger Right Lower Tibia Moment X
Passenger Right Lower Tibia Moment Y
Passenger Right Lower Tibia Force Z
Passenger Left Foot Fore Z
Passenger Left Foot Aft X
Passenger Left Foot Aft Z

Passenger Right Foot Fore Z
Passenger Right Foot Aft X
Passenger Right Foot Aft Z
Passenger Shoulder Belt Force
Passenger Lap Belt Force
Passenger Head Angular Velocity X
Passenger Head Angular Velocity Y
Passenger Head Angular Velocity Z
Left Rear Seat Crossmember X
Left Rear Seat Crossmember Z
Right Rear Seat Crossmember X
Right Rear Seat Crossmember Z
Left Rear Seat Crossmember X Redundant
Right Rear Seat Crossmember X Redundant
Vehicle Engine Top X
Vehicle Engine Bottom X
Load Cell Barrier Forces and Moments

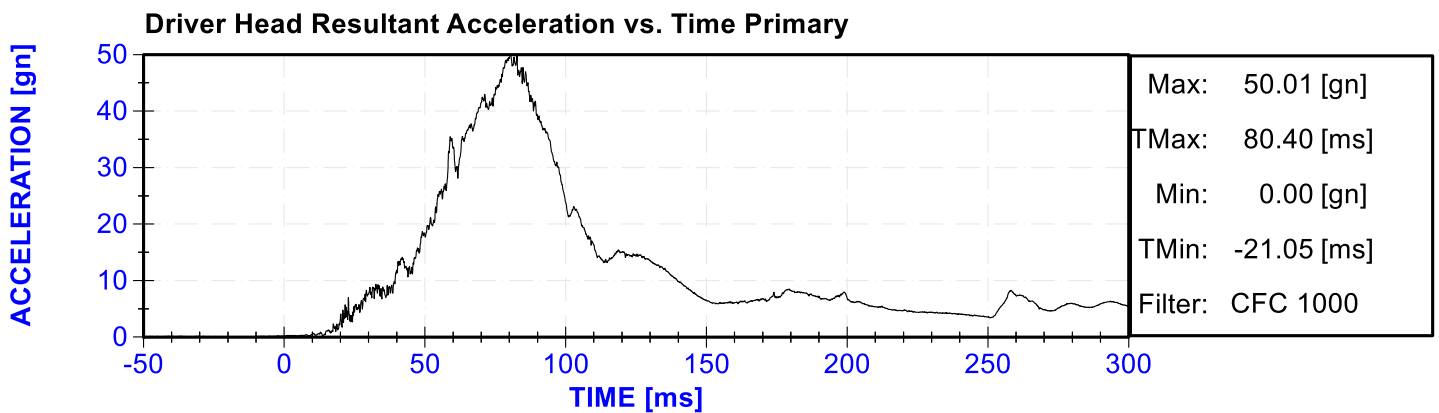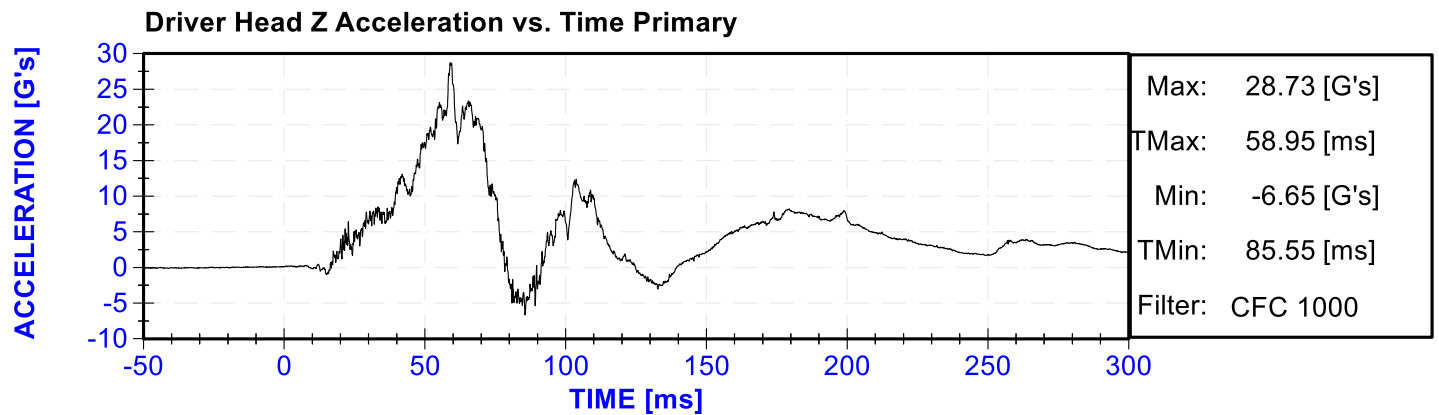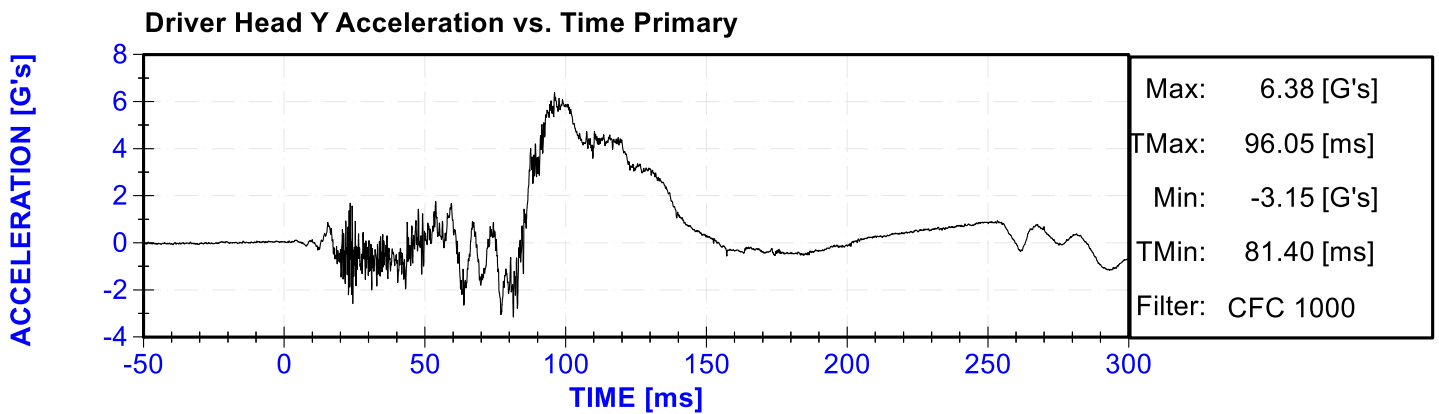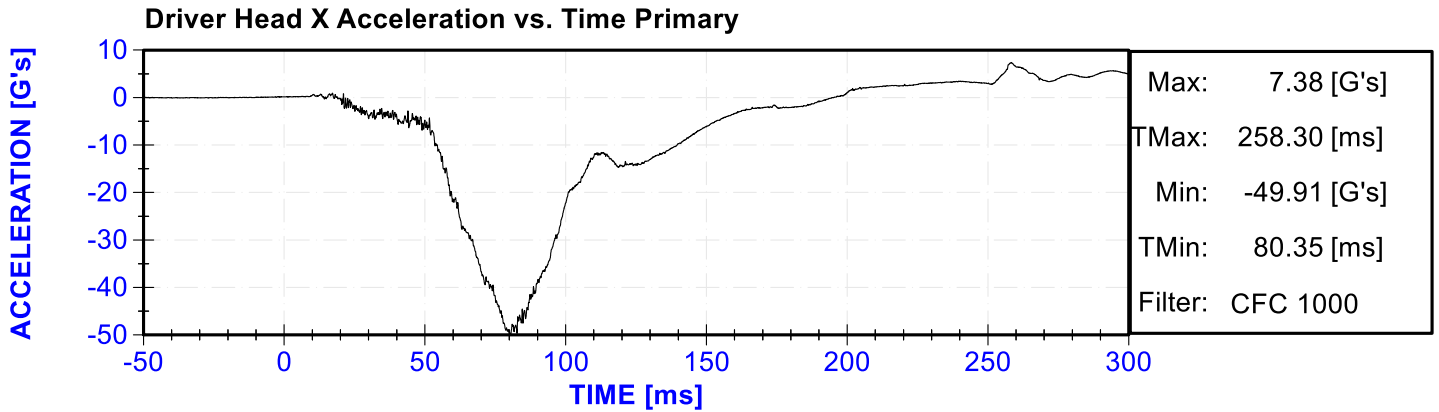


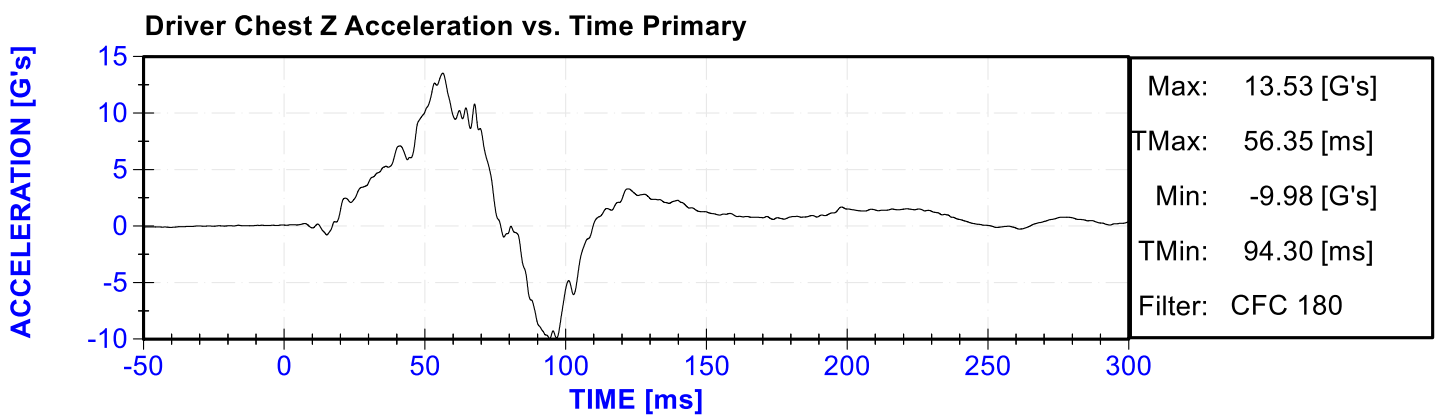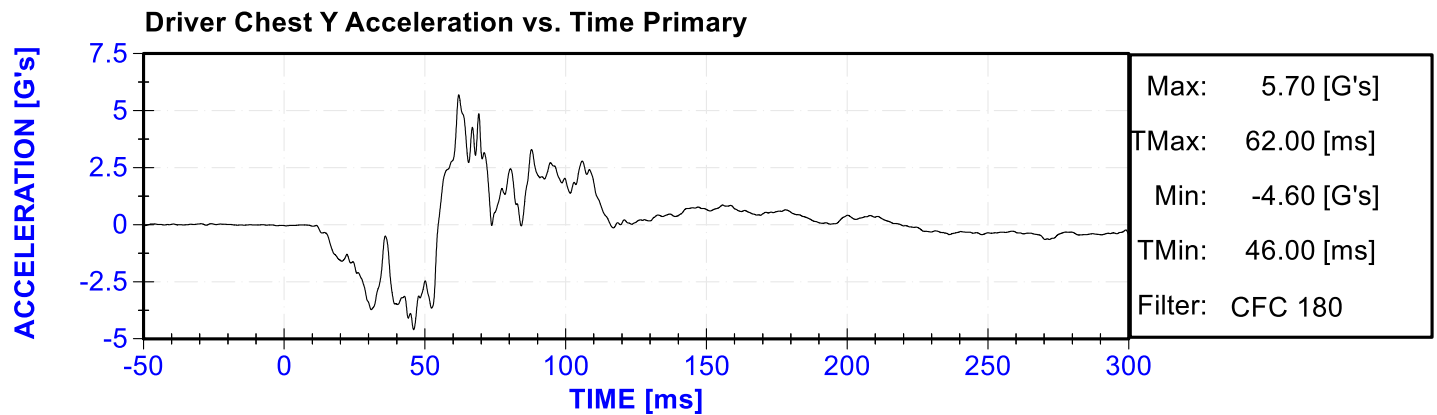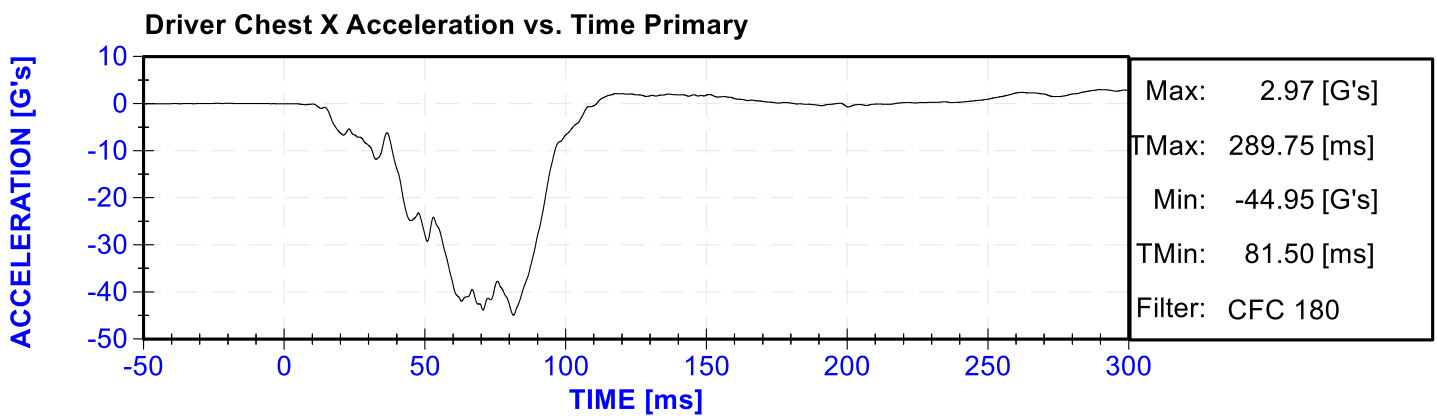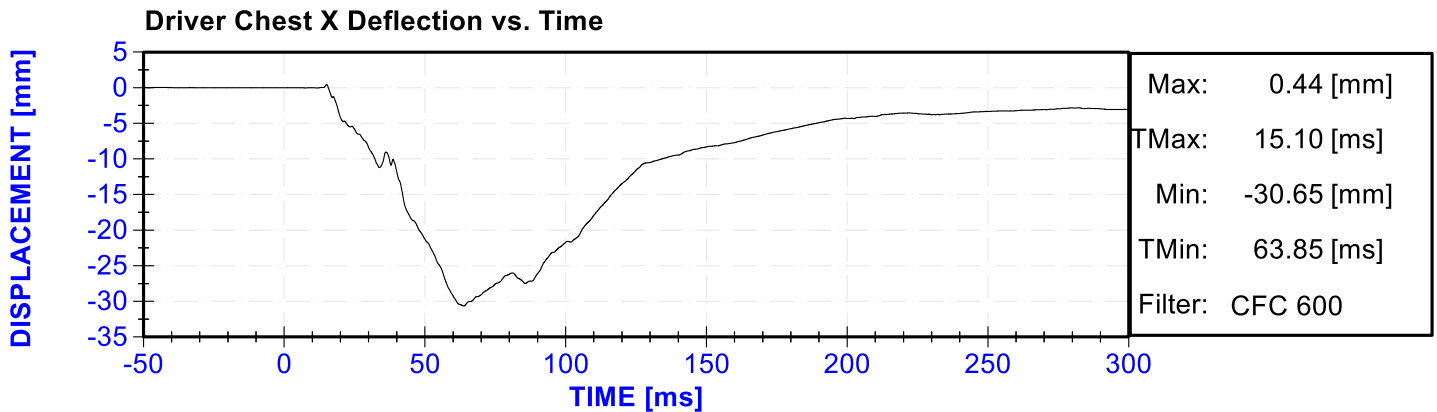


Driver Chest Resultant Acceleration vs. Time Primary

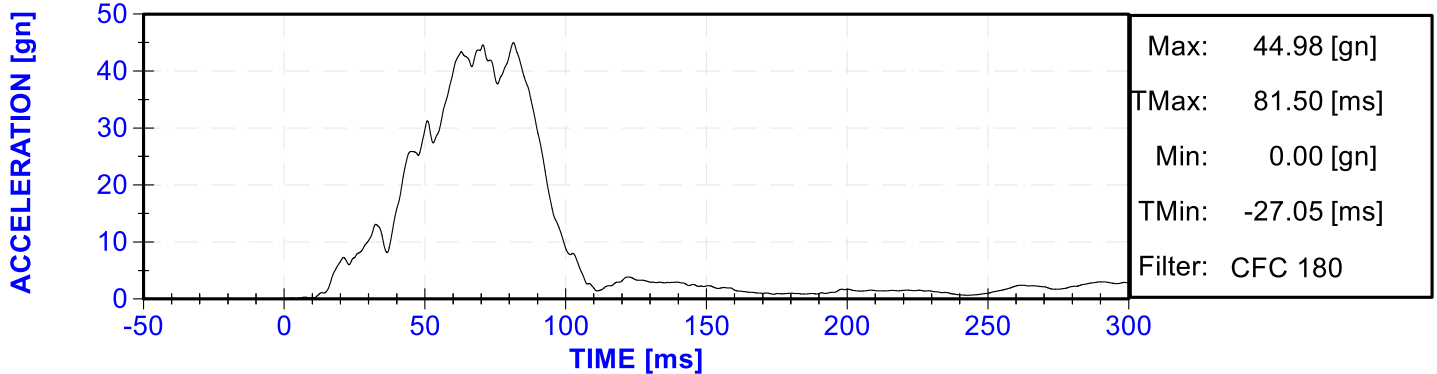


Driver Upper Neck Force X vs. Time Primary




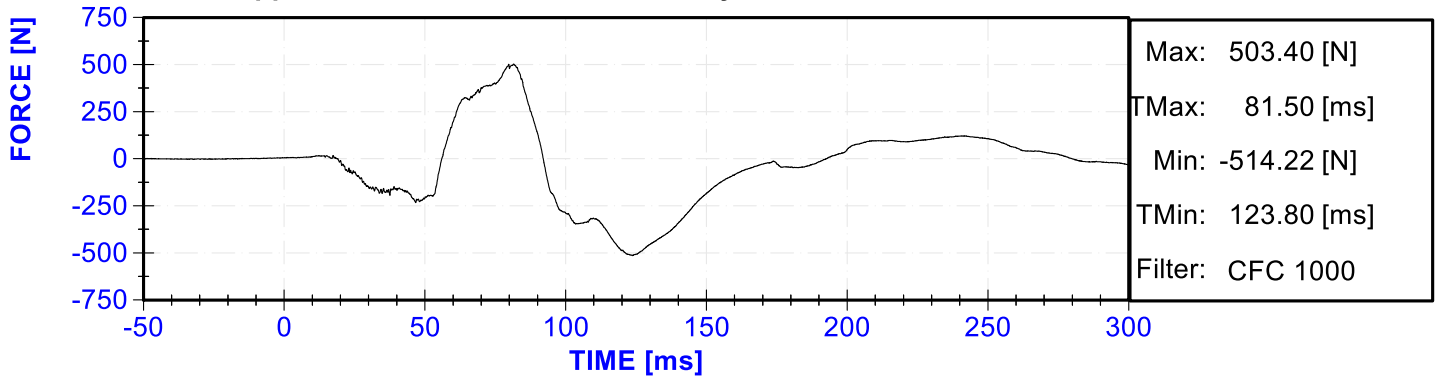






Driver Upper Neck Force Z vs. Time Primary




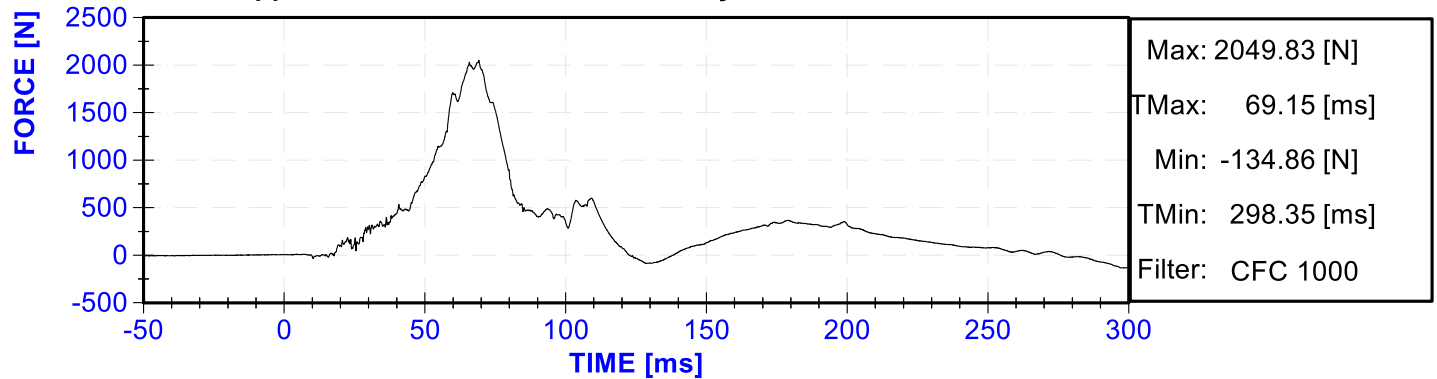


Driver Upper Neck Moment Y vs. Time Primary

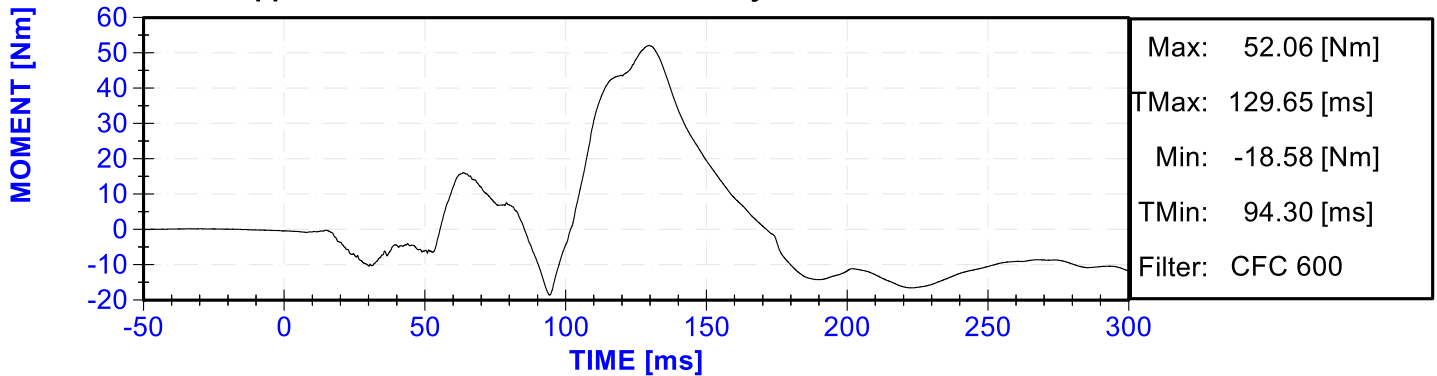


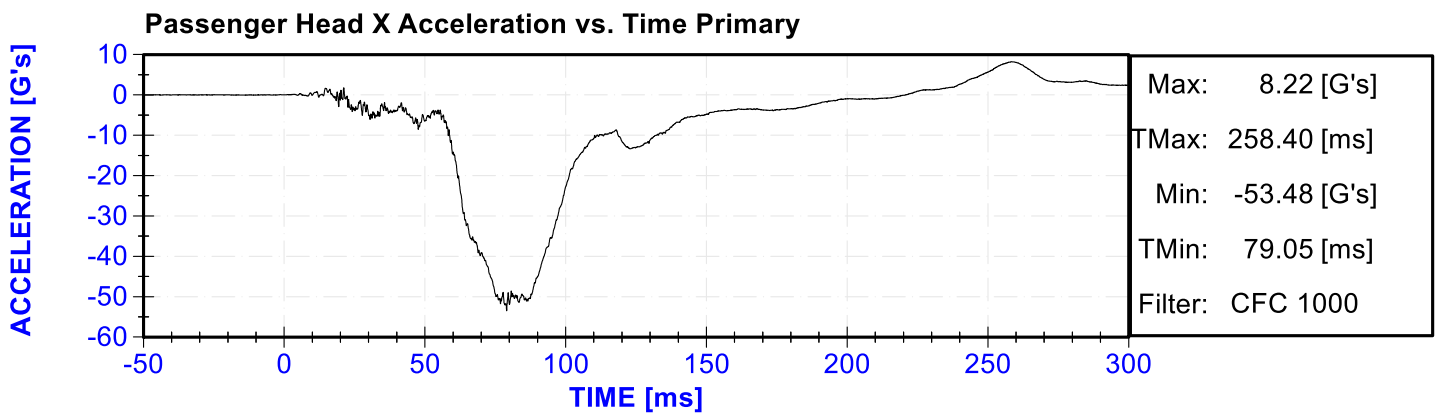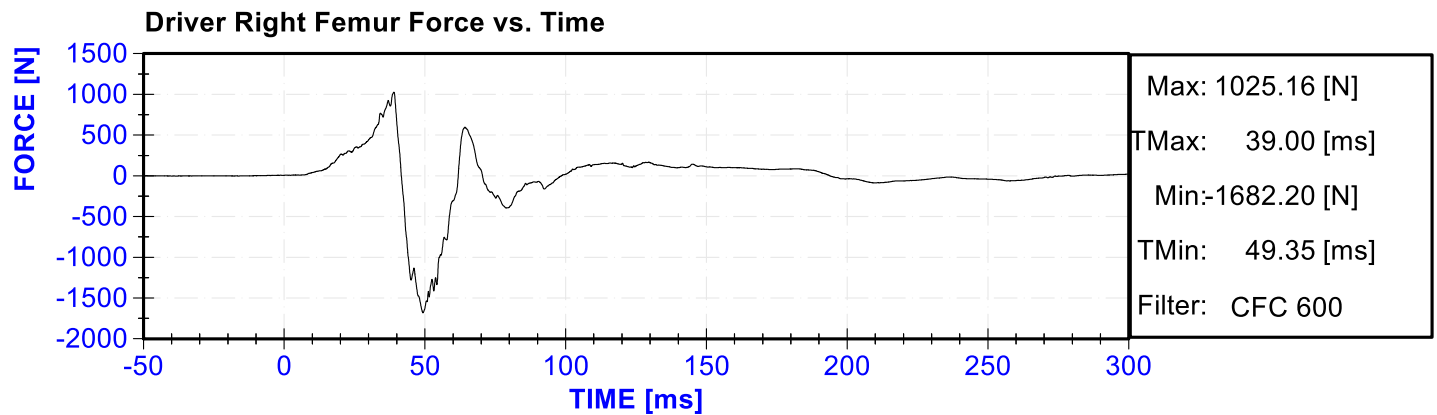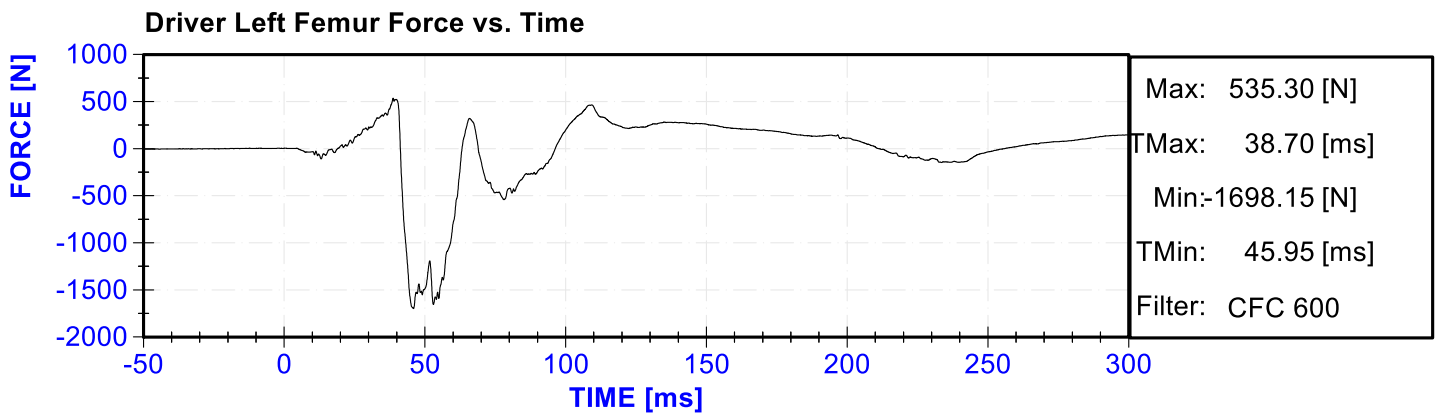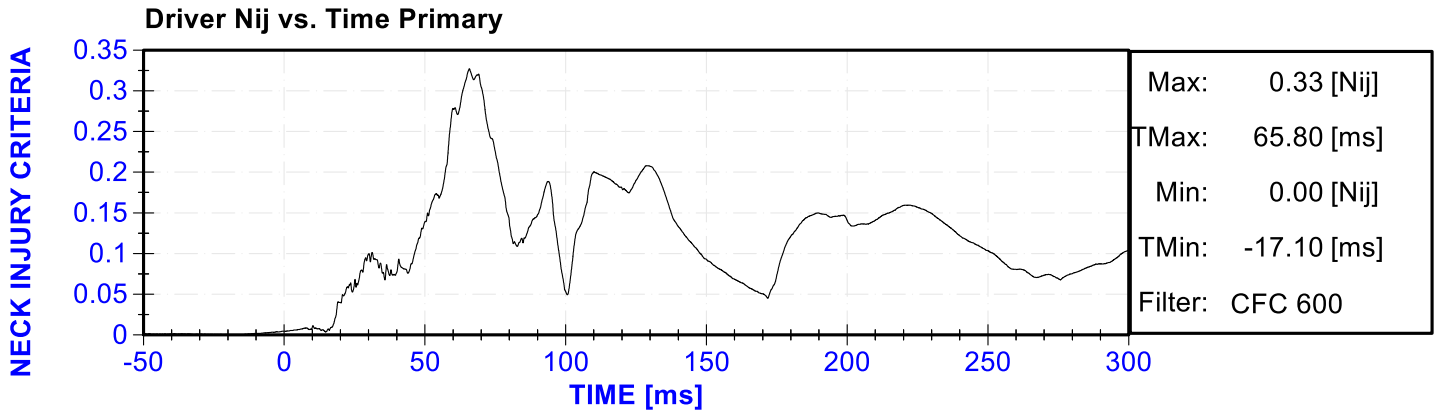

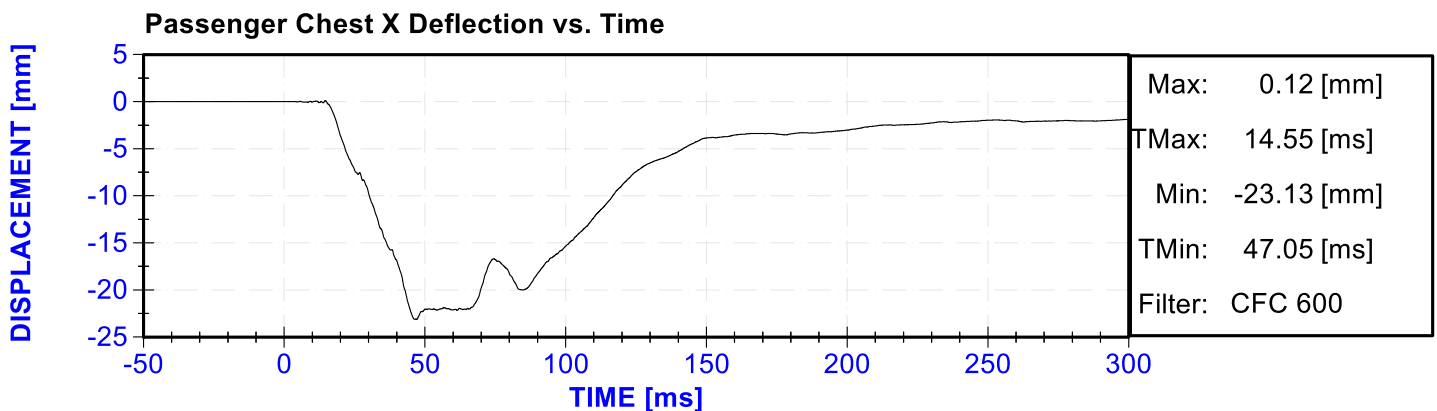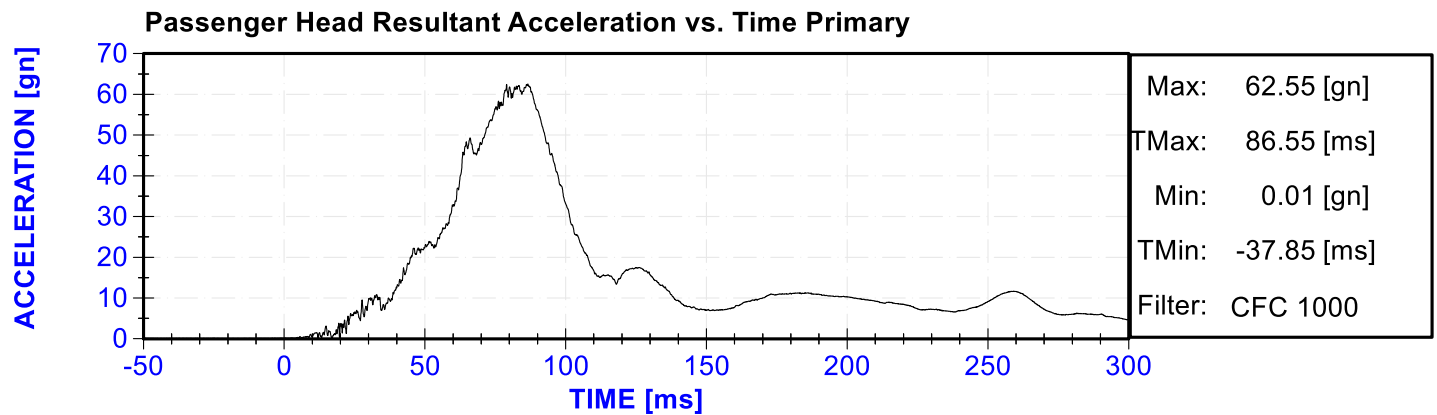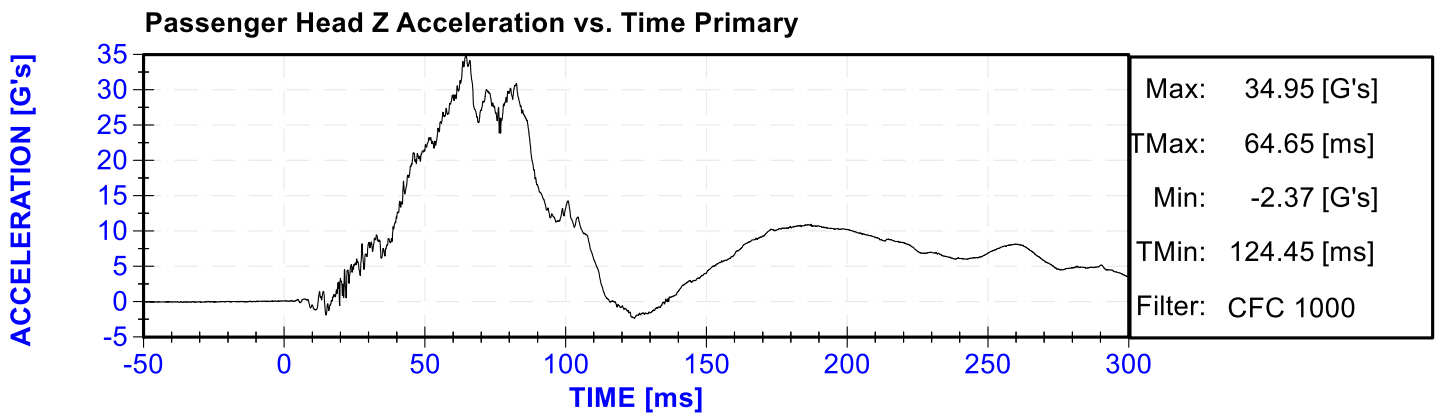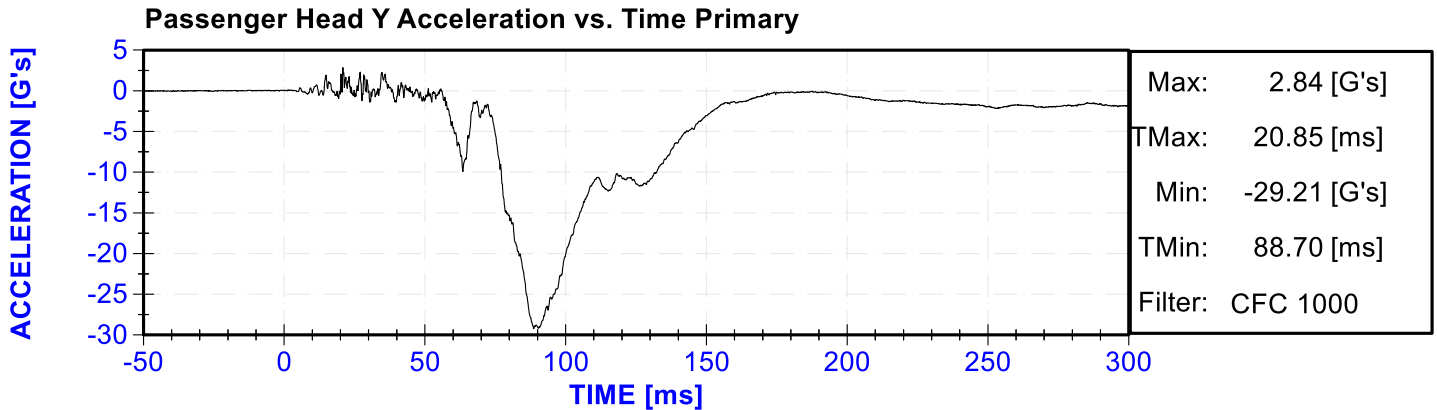


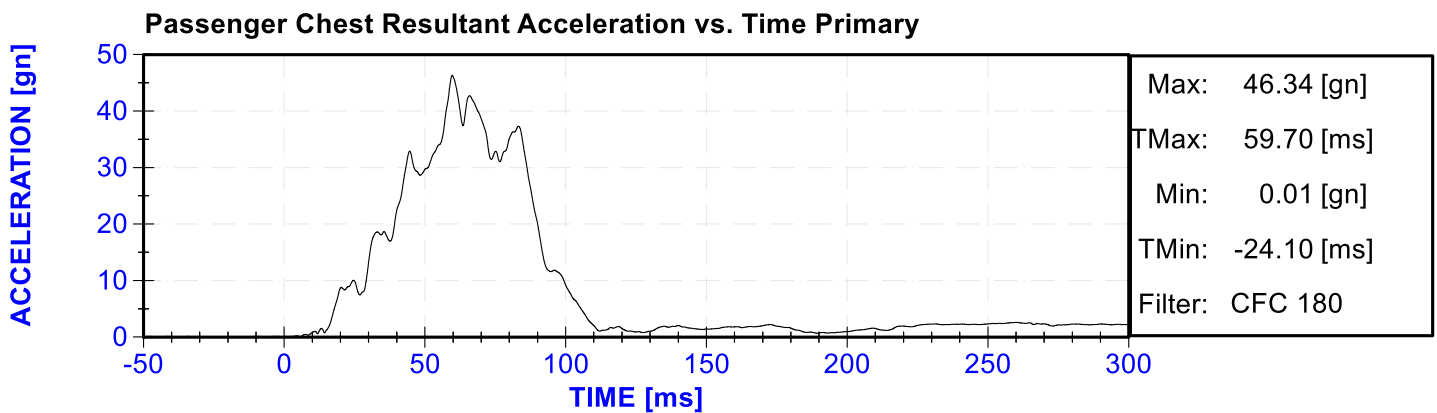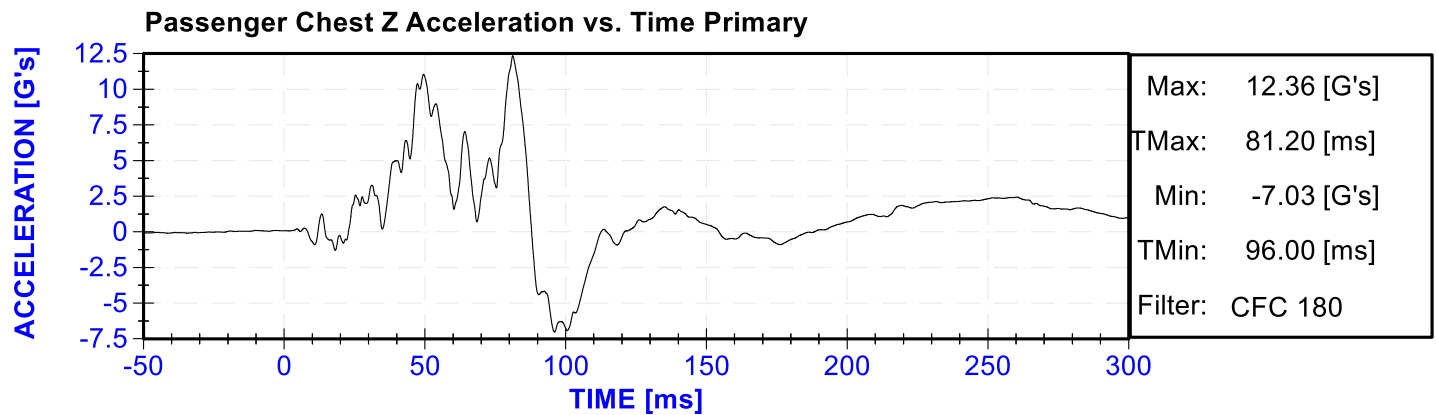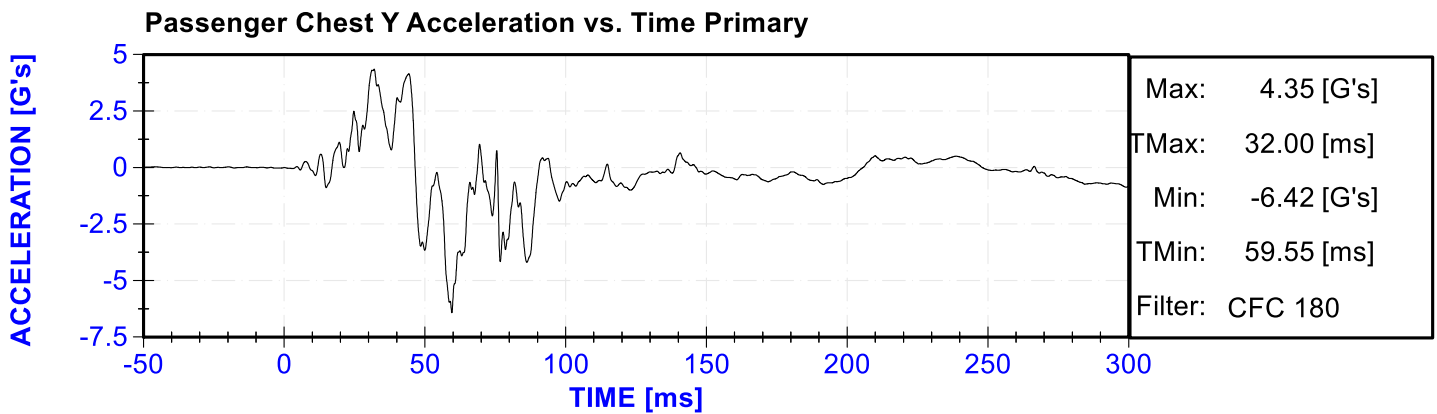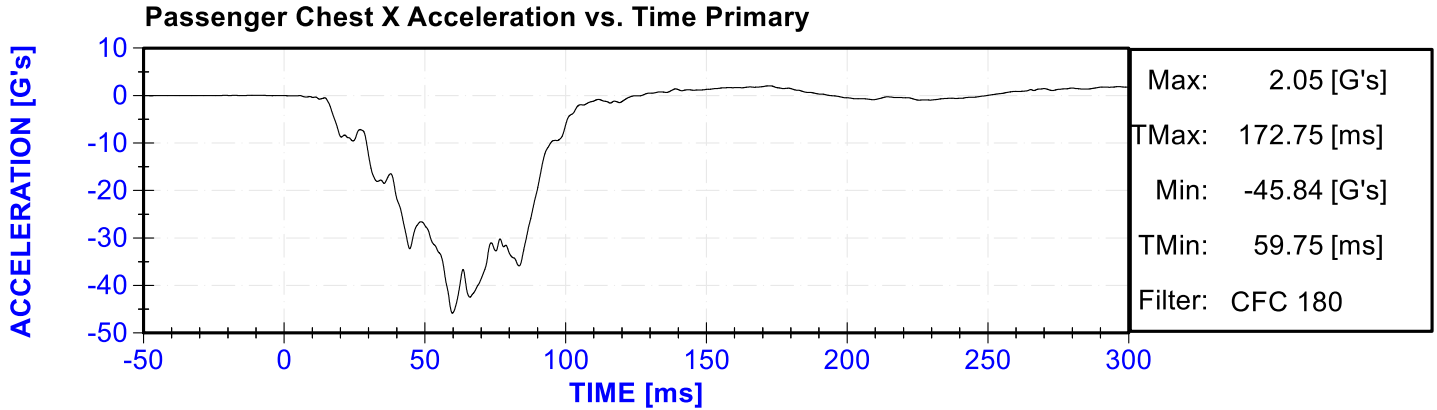


Passenger Upper Neck Force X vs. Time Primary

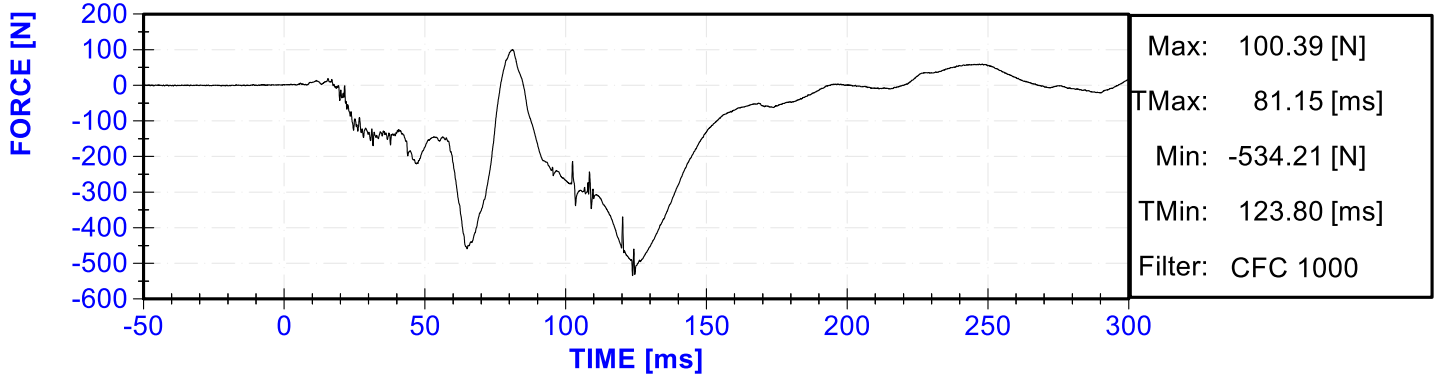


Passenger Upper Neck Force Z vs. Time Primary


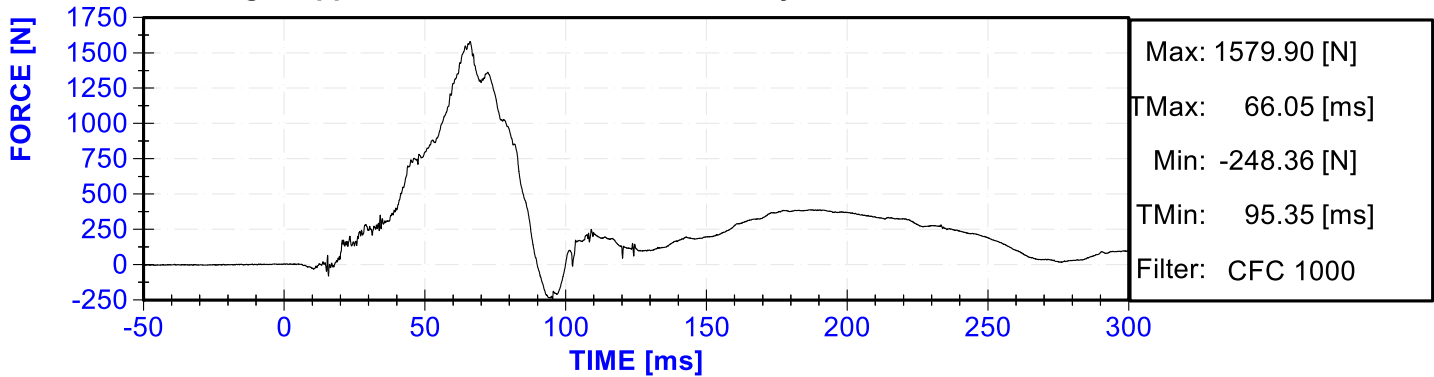


Passenger Upper Neck Moment Y vs. Time Primary

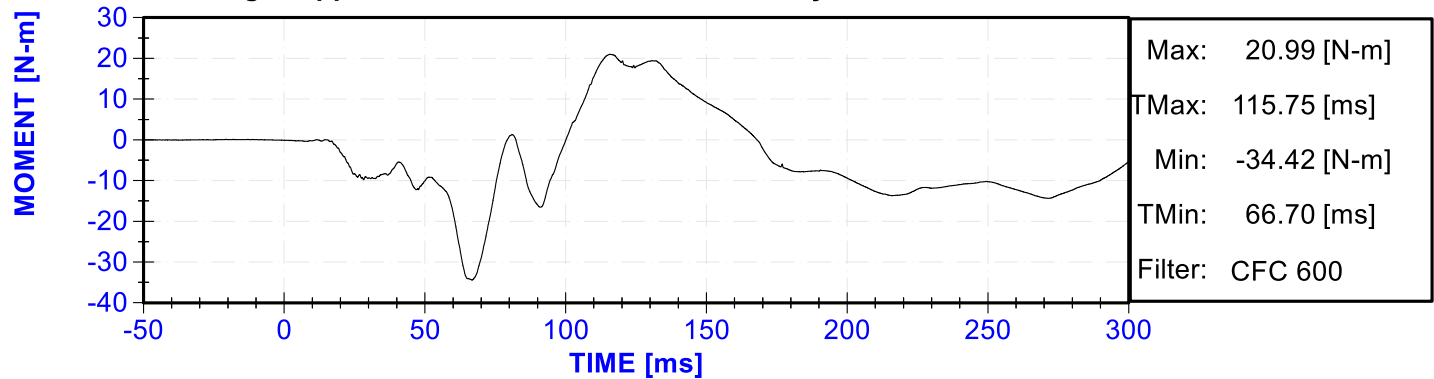

Passenger Nij vs. Time Primary

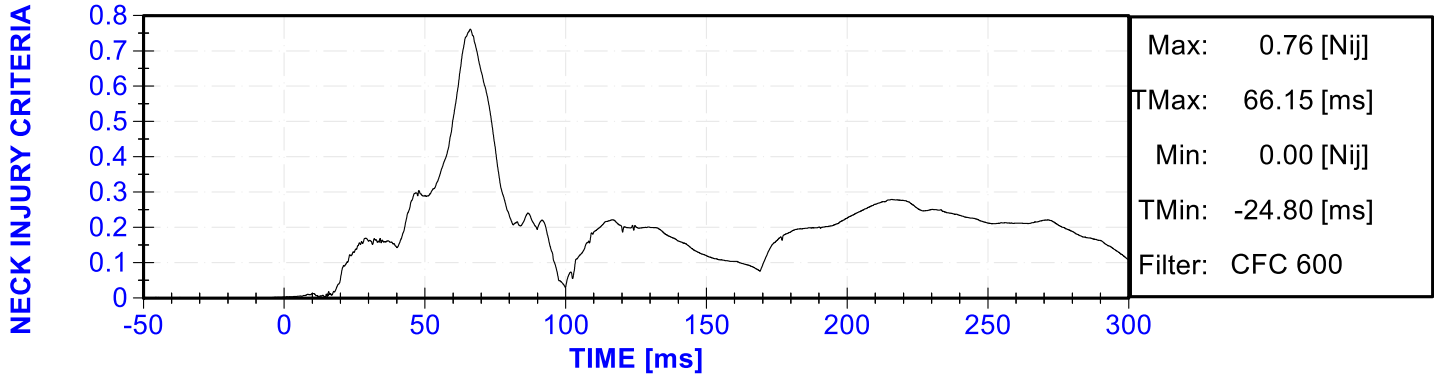

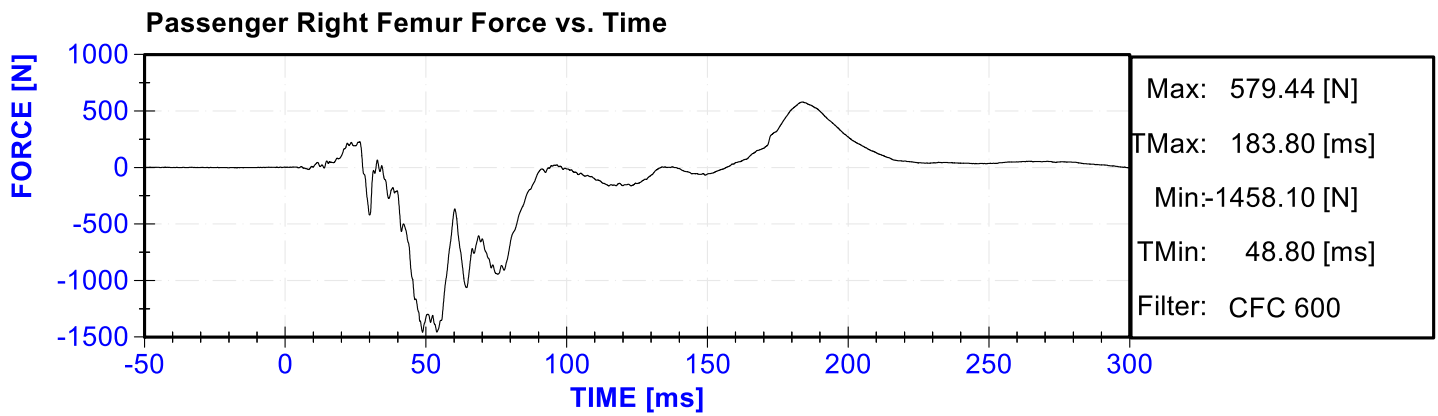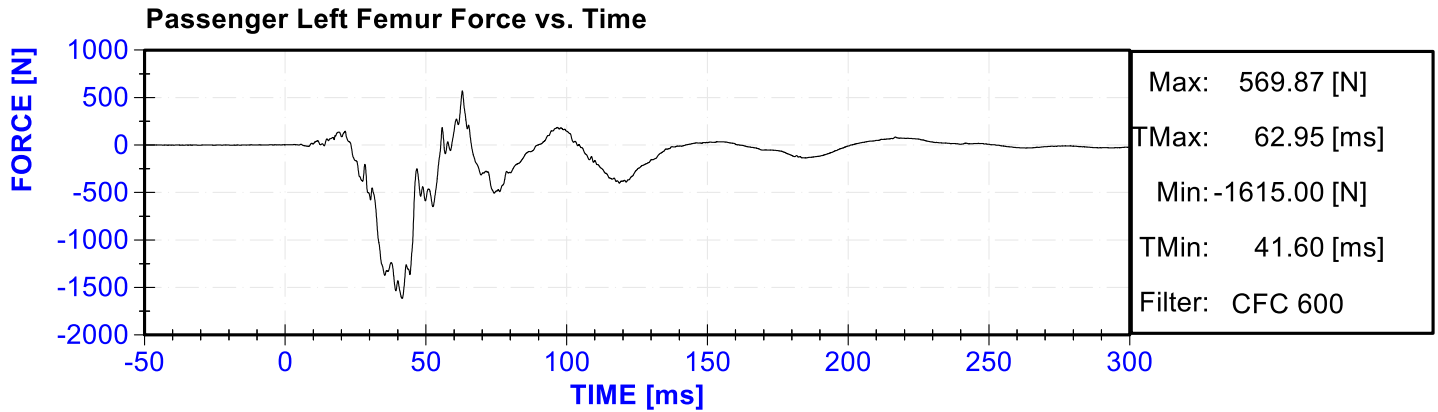

APPENDIX C

DUMMY CALIBRATION AND PERFORMANCE VERIFICATION DATA

CALIBRATION TEST RESULTS

PRE-TEST

HYBRID III 50TH PERCENTILE MALE - DRIVER ATD

SERIAL NO: 142




External Measurements - Hybrid 3 - 50th Male

Technician: K. Dutton

Date: 01/10/2020

Dummy Serial Number: 142

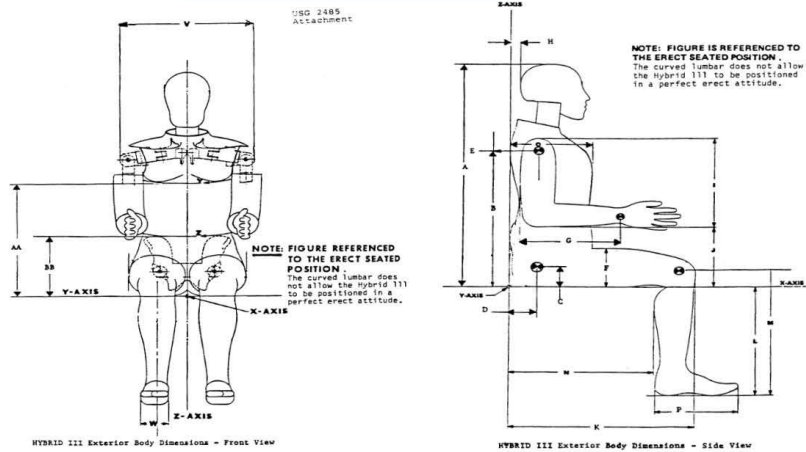

Symbol	Description	Specification (in)		Result (in)	Pass/Fail
A	Sitting Height	34.6	35.0	34.8	Pass
B	Shoulder Pivot Height	19.9	20.5	20.2	Pass
C	H-Point Height	3.3	3.5	3.4	Pass
D	H-Point from Backline	5.3	5.5	5.4	Pass
E	Shoulder Pivot from Backline	3.3	3.7	3.5	Pass
F	Thigh Clearance	5.5	6.1	5.8	Pass
G	Back of Elbow to Wrist Pivot	11.4	12.0	11.8	Pass
H	Head Back to Backline	1.6	1.8	1.7	Pass
I	Shoulder to Elbow Length	13.0	13.6	13.5	Pass
J	Elbow Rest Height	7.5	8.3	8.2	Pass
K	Buttock to Knee Length	22.8	23.8	23.4	Pass
L	Popliteal Height	16.9	17.9	17.3	Pass
M	Knee Pivot Height	19.1	19.7	19.5	Pass
N	Buttock Popliteal Length	17.8	18.8	18.4	Pass
O	Chest Depth without Jacket	8.4	9.0	8.7	Pass
P	Foot Length (right)	9.9	10.5	10.3	Pass
V	Shoulder Breadth	16.3	17.2	16.9	Pass
W	Foot Breadth	3.6	4.2	3.8	Pass
Y	Chest Circumference with Jacket	38.2	39.4	38.8	Pass
Z	Waist Circumference	32.9	34.1	33.7	Pass
AA	Reference Location (Chest Circumference)	16.9	17.1	17.0	Pass
BB	Reference Location (Waist Circumference)	8.9	9.1	9.0	Pass


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	22.0	Pass
Humidity	10	70	%	22.2	Pass
Resultant Acceleration	225	275	g's	261.3	Pass
Oscillation	0	10	%	2.5	Pass
Lateral Acceleration	-15	15	g's	-9.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264	P51681	8/13/2019	2/11/2020
Y Accelerometer	ENDEVCO 7264	P64151	8/13/2019	2/11/2020
Z Accelerometer	ENDEVCO 7264	P52114	8/13/2019	2/11/2020

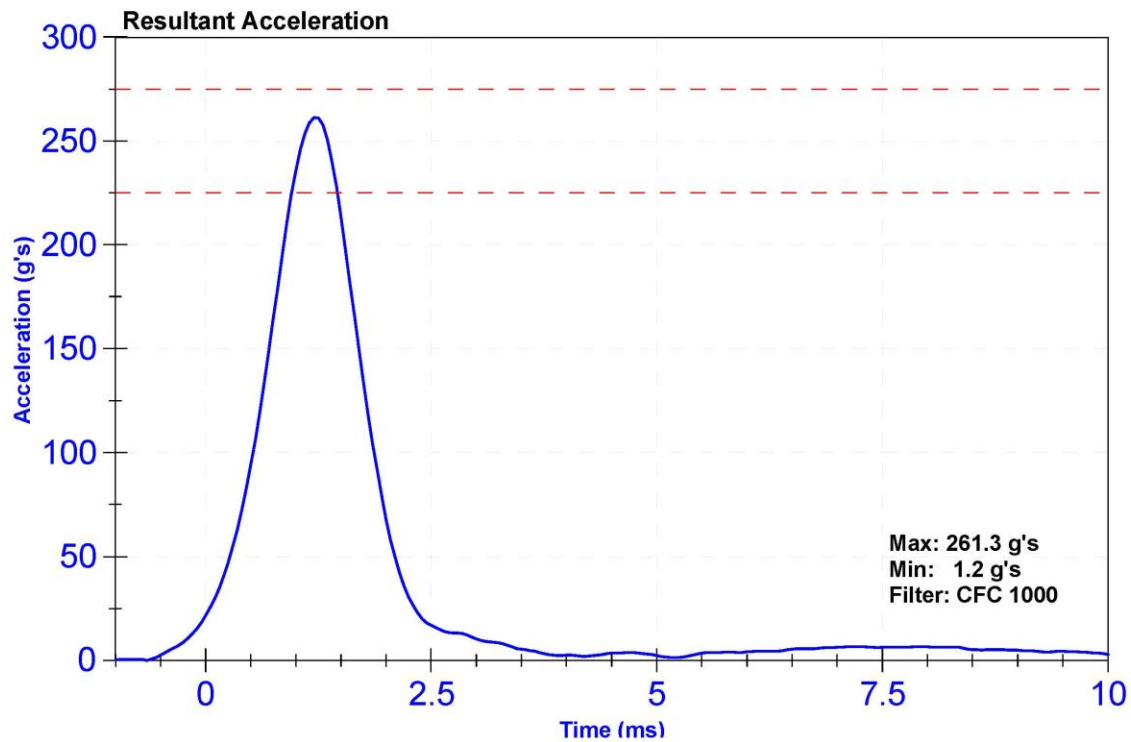

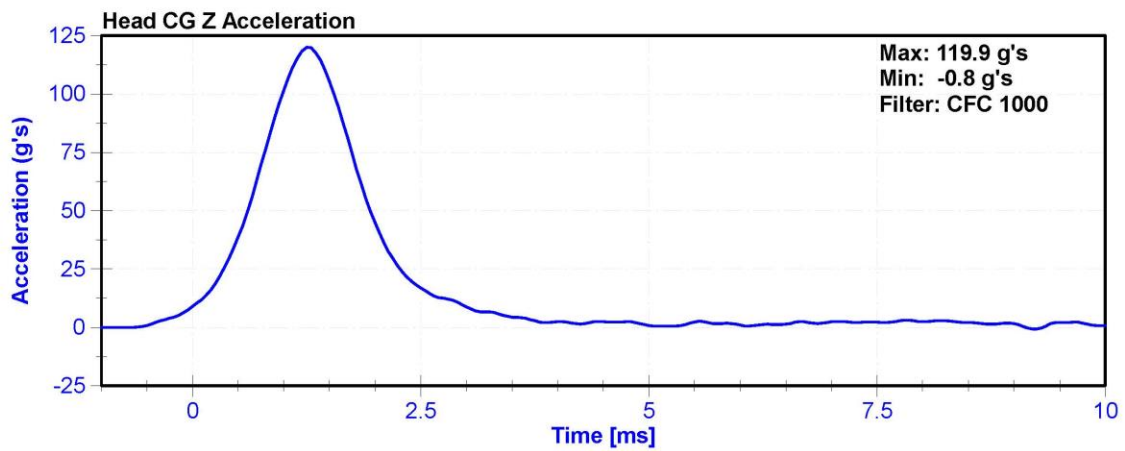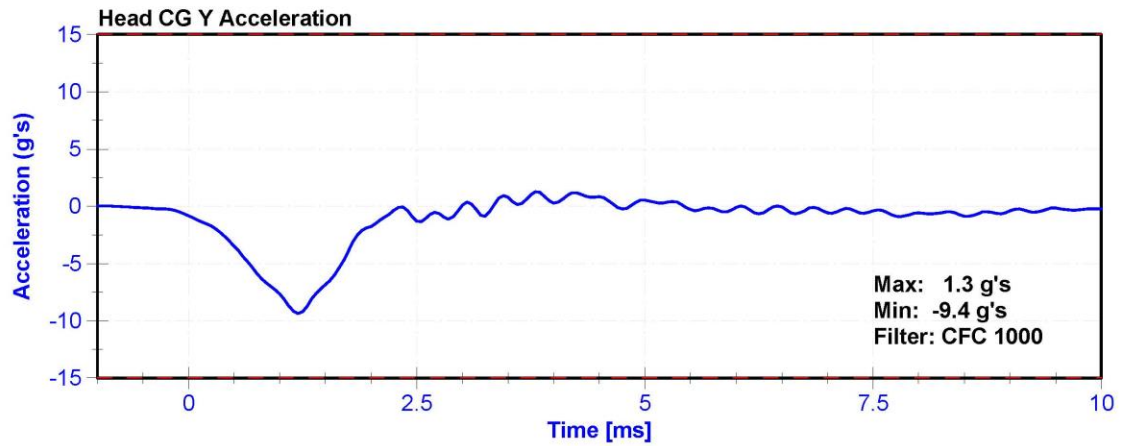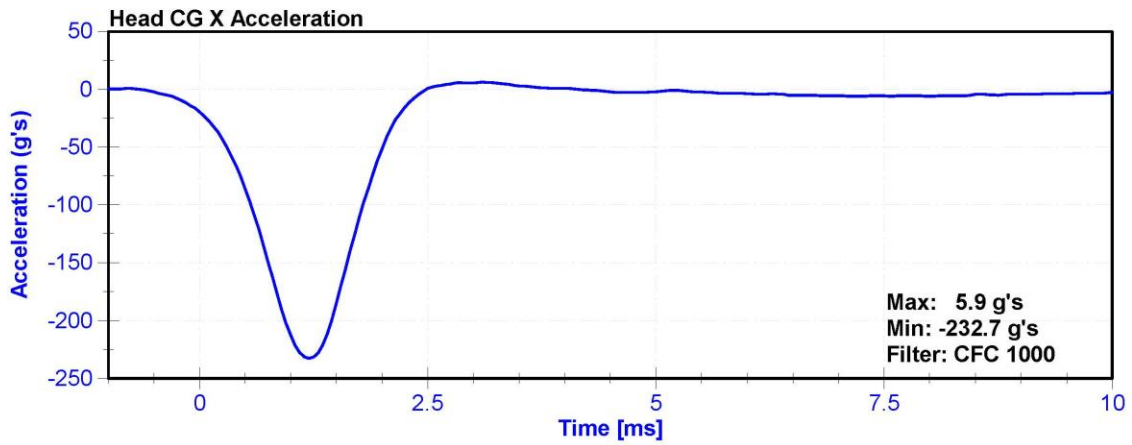



ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.5	Pass
Humidity	10	70	%	24.1	Pass
Velocity	6.89	7.13	m/s	6.958	Pass
Pendulum Deceleration at 10ms	22.5	27.5	g's	26.51	Pass
Pendulum Deceleration at 20ms	17.6	22.6	g's	20.94	Pass
Pendulum Deceleration at 30ms	12.5	18.5	g's	16.73	Pass
Max. Pendulum Deceleration After 30ms	0	29	g's	26.5	Pass
Pendulum Deceleration Time to 5 g's	34	42	ms	40.5	Pass
Maximum D Plane Rotation	64	78	deg	70.5	Pass
Time to Maximum Rotation	57	64	ms	60.9	Pass
Rotation Decay to Zero	113	127	ms	118.0	Pass
Moment About Occipital Condyle	88.1	108.4	Nm	94.49	Pass
Time to Maximum Moment	47	58	ms	54.2	Pass
Moment Decay to Zero	97	107	ms	103.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	Denton 1716	17162019 FX	2/18/2019	2/18/2020

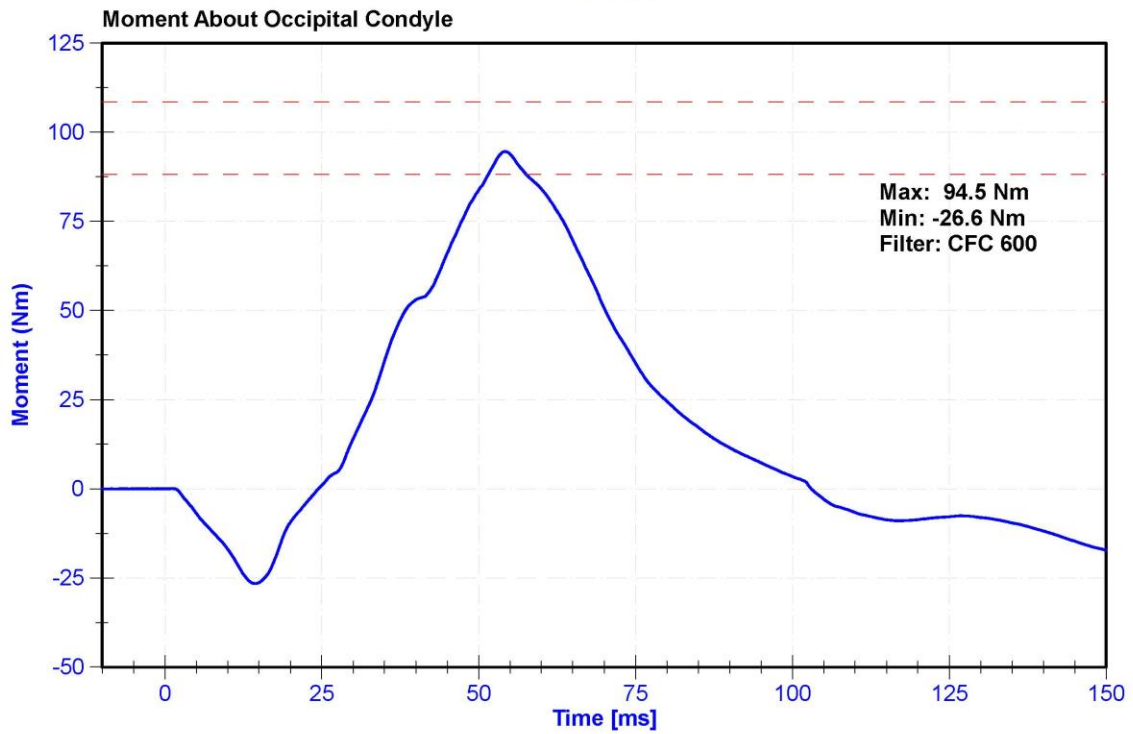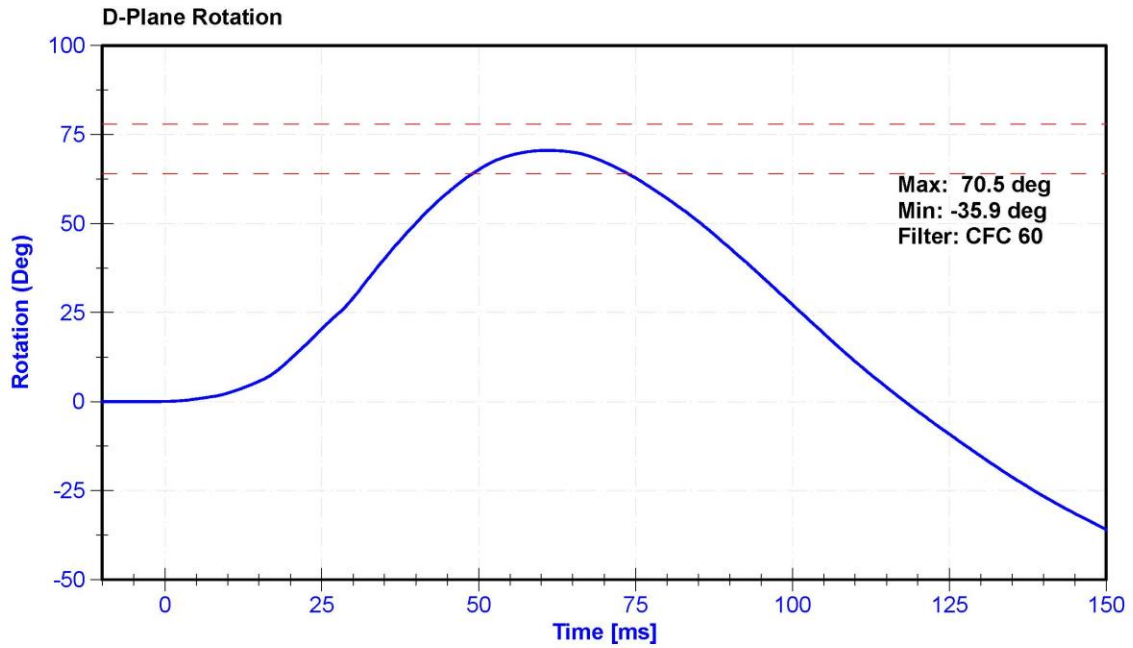

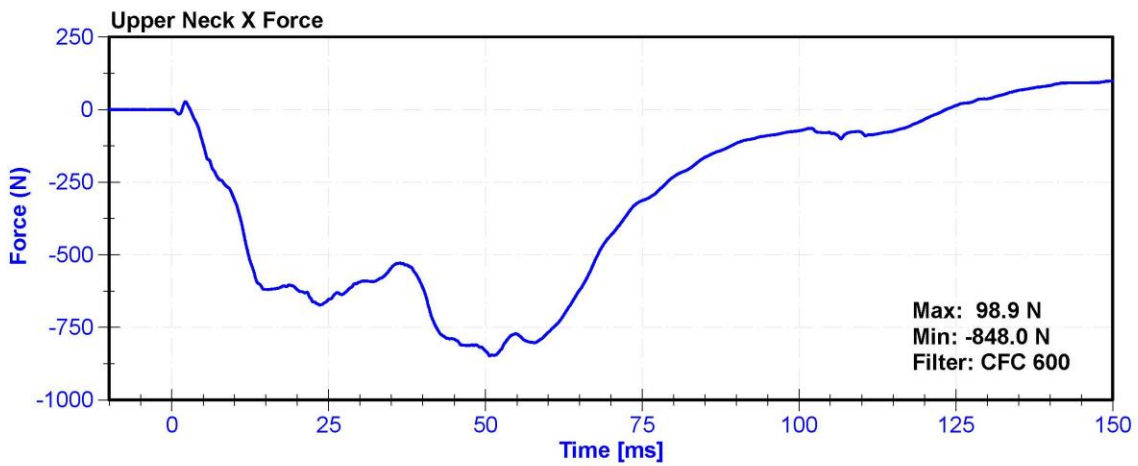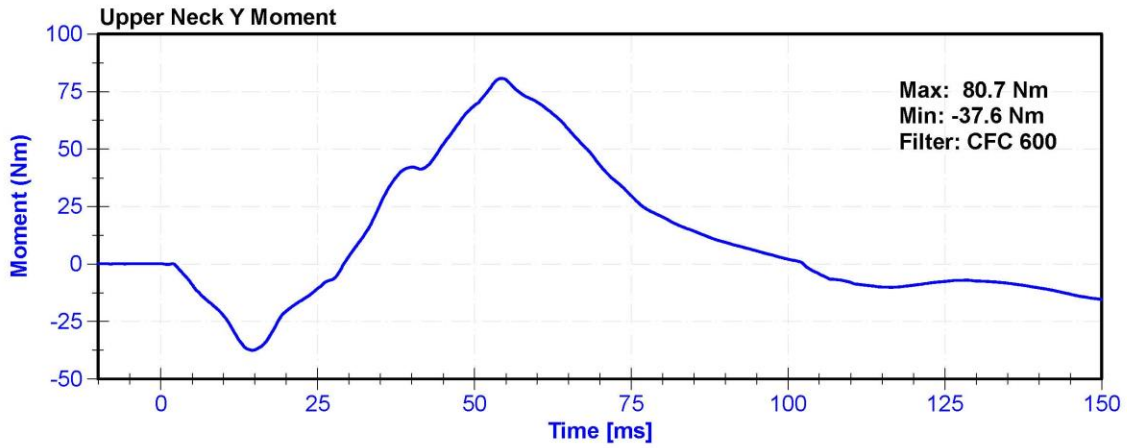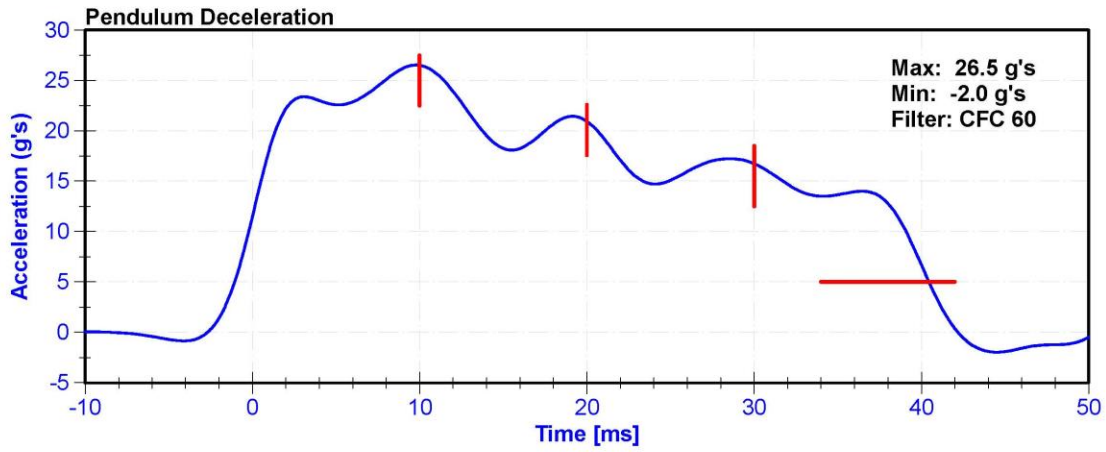



ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.8	Pass
Humidity	10	70	%	24.6	Pass
Velocity	5.94	6.19	m/s	6.005	Pass
Pendulum Deceleration at 10ms	17.2	21.2	g's	19.82	Pass
Pendulum Deceleration at 20ms	14	19	g's	18.2	Pass
Pendulum Deceleration at 30ms	11	16	g's	14.8	Pass
Max. Pendulum Deceleration After 30ms	0	22	g's	19.8	Pass
Pendulum Deceleration Time to 5 g's	38	46	ms	43.8	Pass
Maximum D Plane Rotation	81	106	deg	98.3	Pass
Time to Maximum Rotation	72	82	ms	78.7	Pass
Rotation Decay to Zero	147	174	ms	159.2	Pass
Minimum Moment About OC	-80	-52.9	Nm	-71.38	Pass
Time to Minimum Moment	65	79	ms	73.2	Pass
Moment Decay to Zero	120	148	ms	139.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	Denton 1716	17162019 FX	2/18/2019	2/18/2020

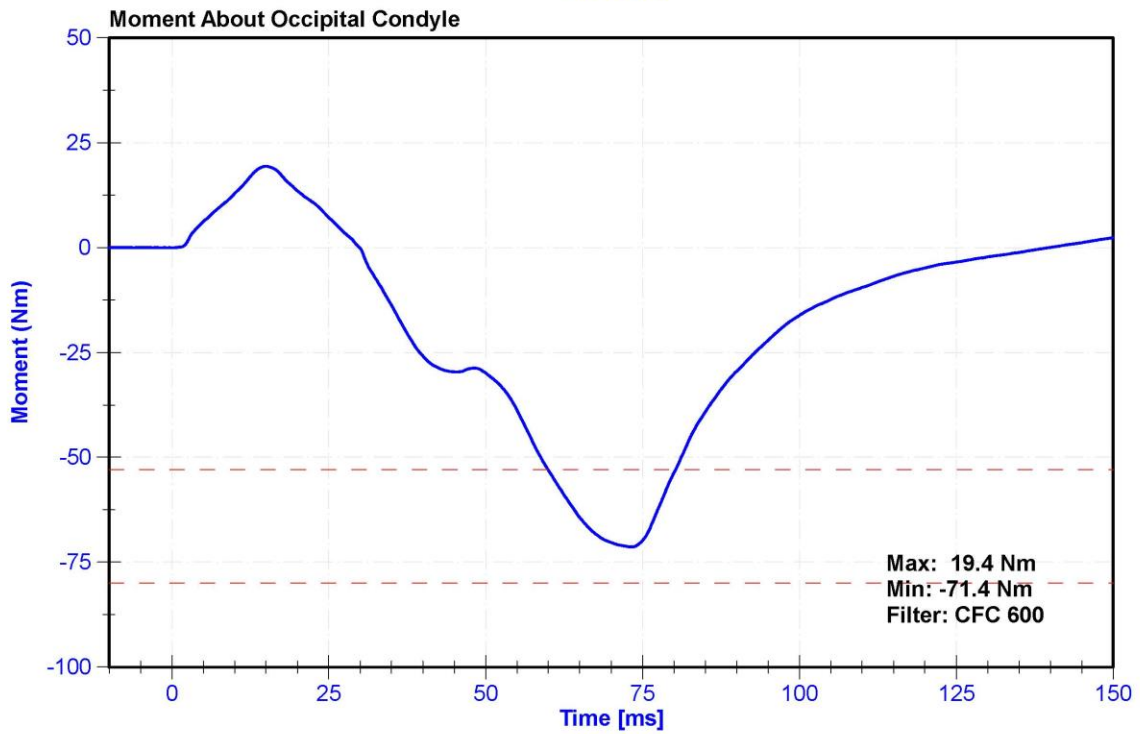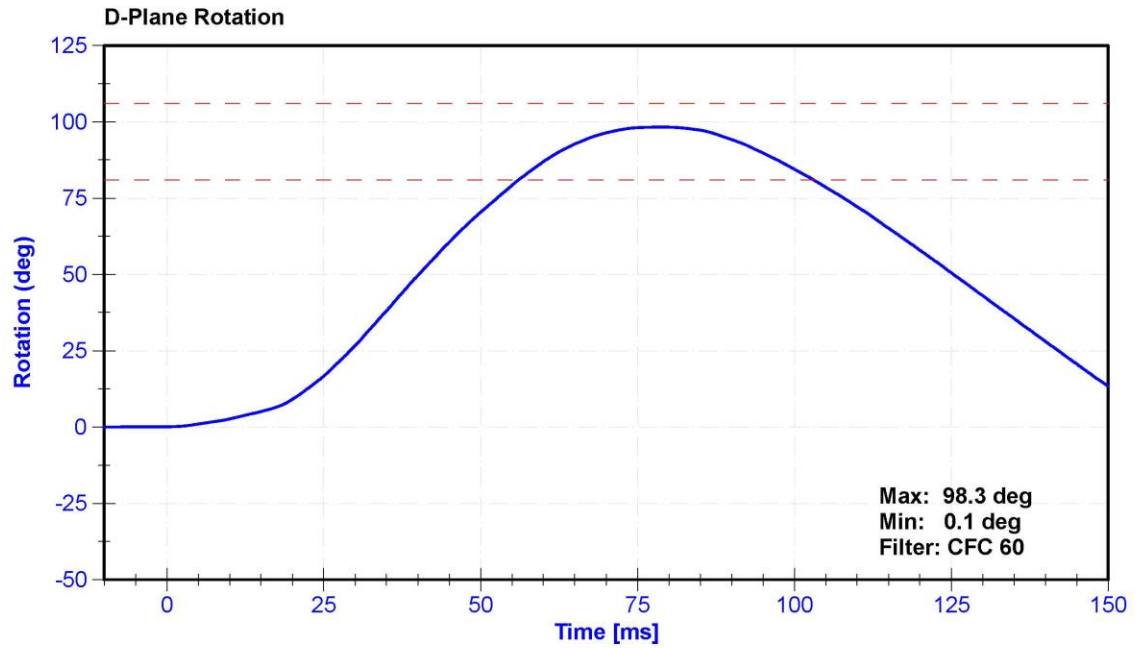

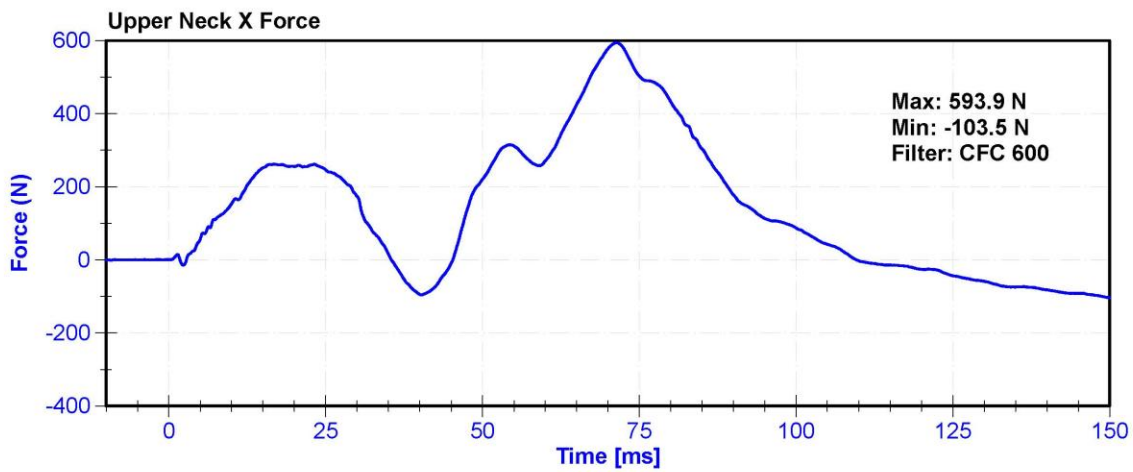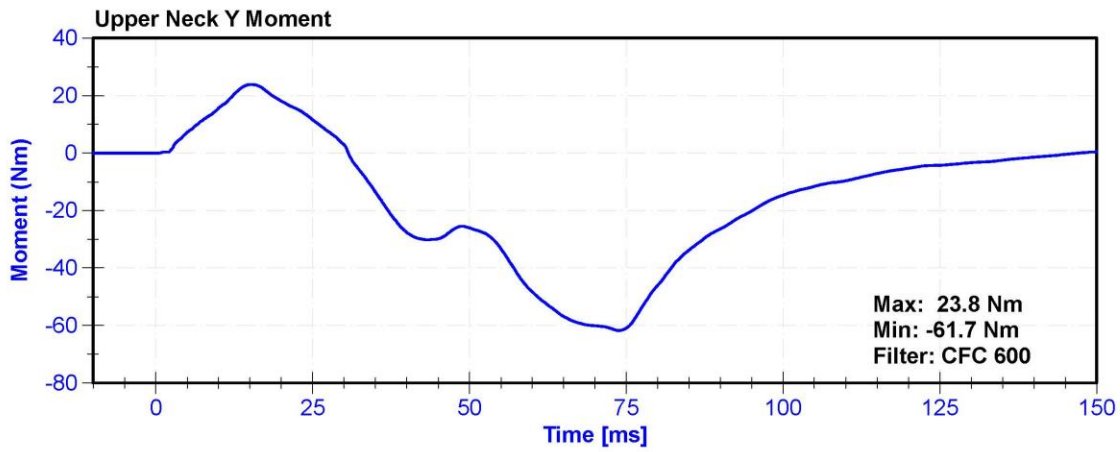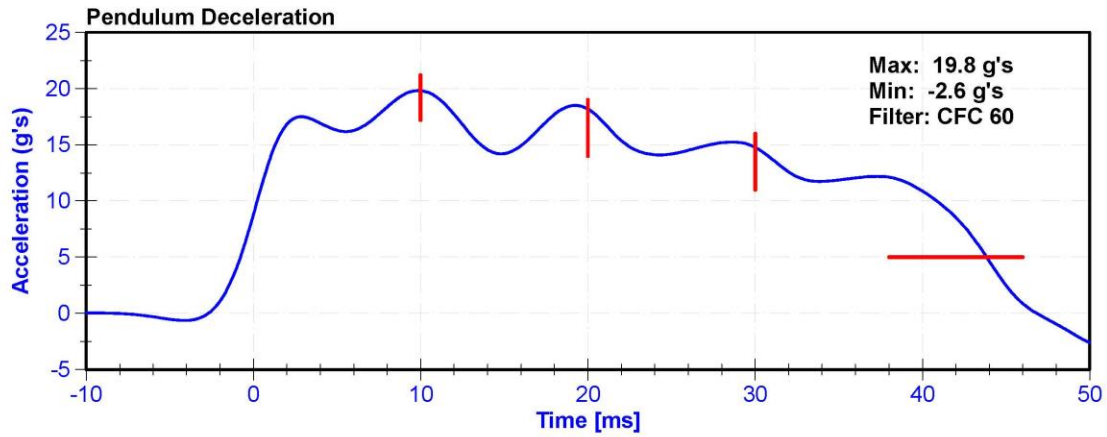


ATD Manufacturer	Humanetics	Test Technician	M. Dudek
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.4	Pass
Humidity	10	70	%	33	Pass
Velocity	6.59	6.83	m/s	6.626	Pass
Chest Displacement	-72.6	-63.5	mm	-66.22	Pass
Resistive Force	5160	5894	N	5433.1	Pass
Hysteresis	65	85	%	68.6	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A286228	9/27/2019	3/27/2020
Chest Potentiometer	JDK 6209-2038	DS-142	9/12/2019	9/11/2020

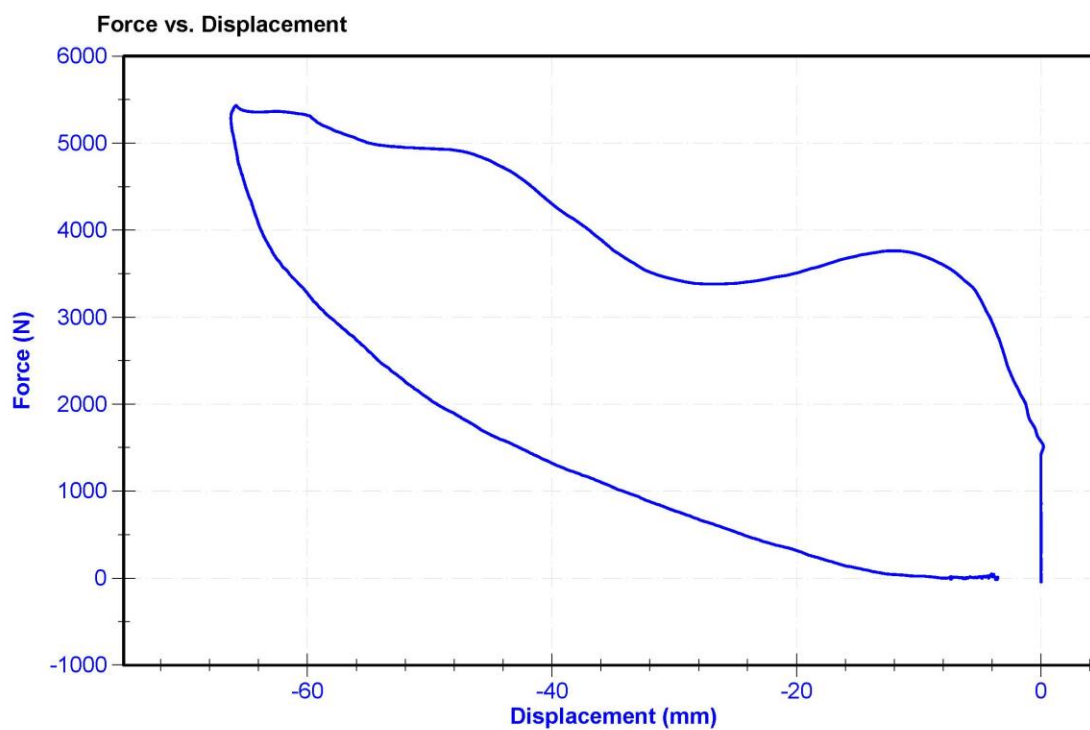

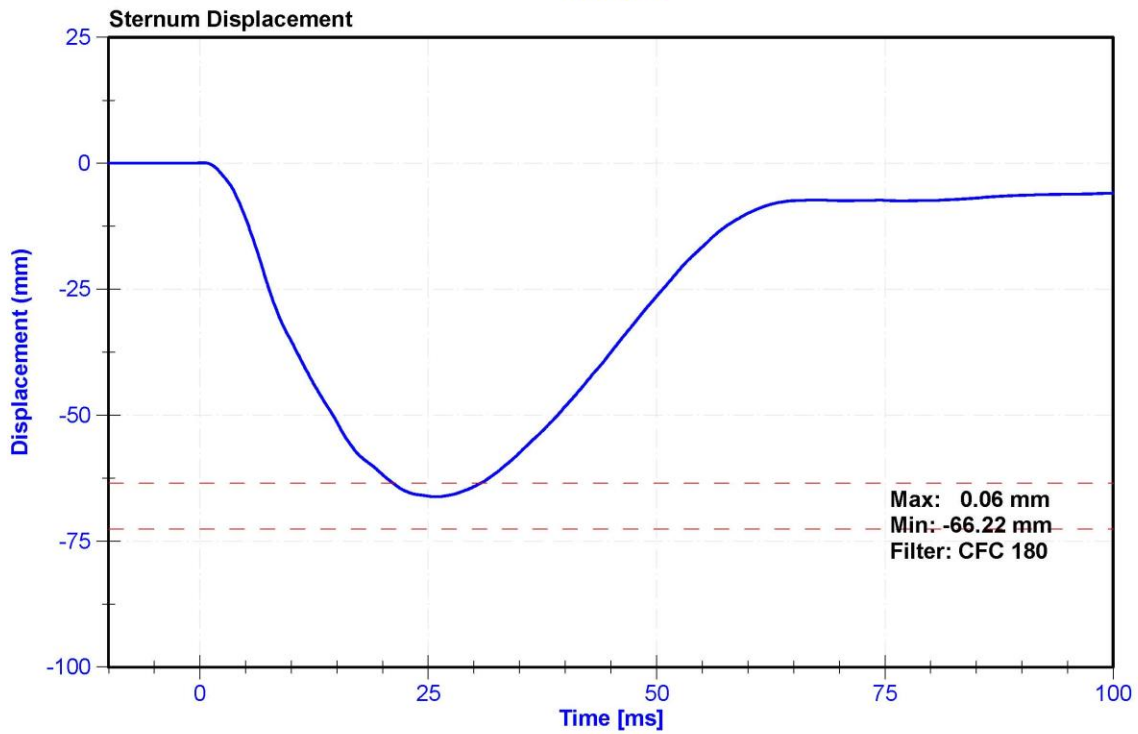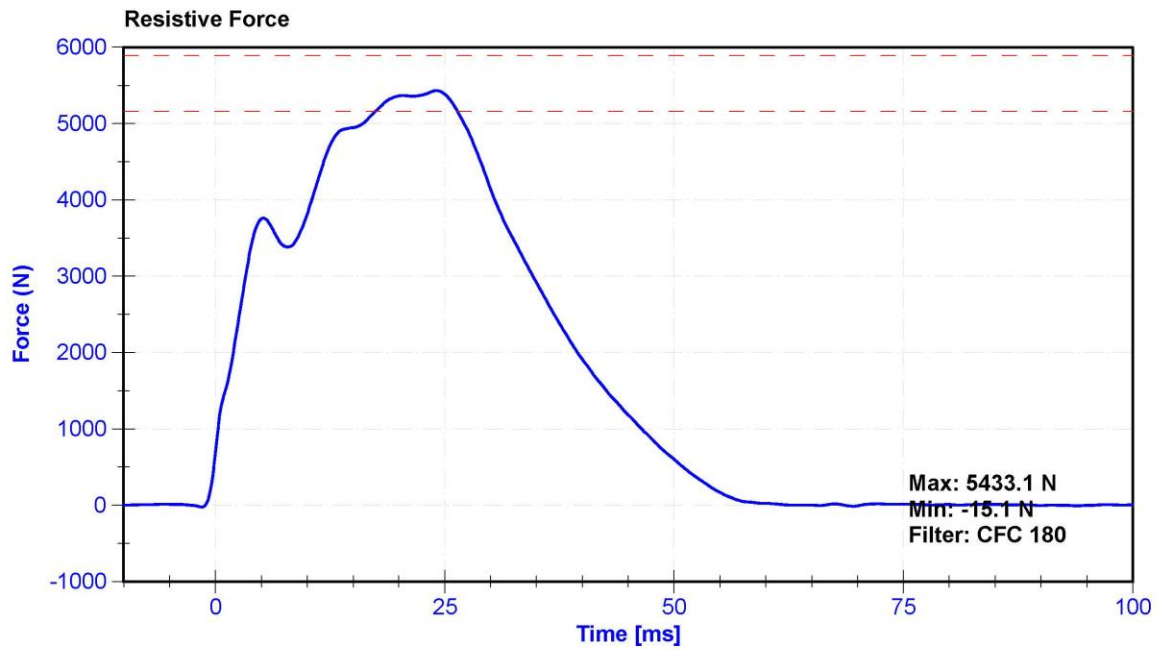

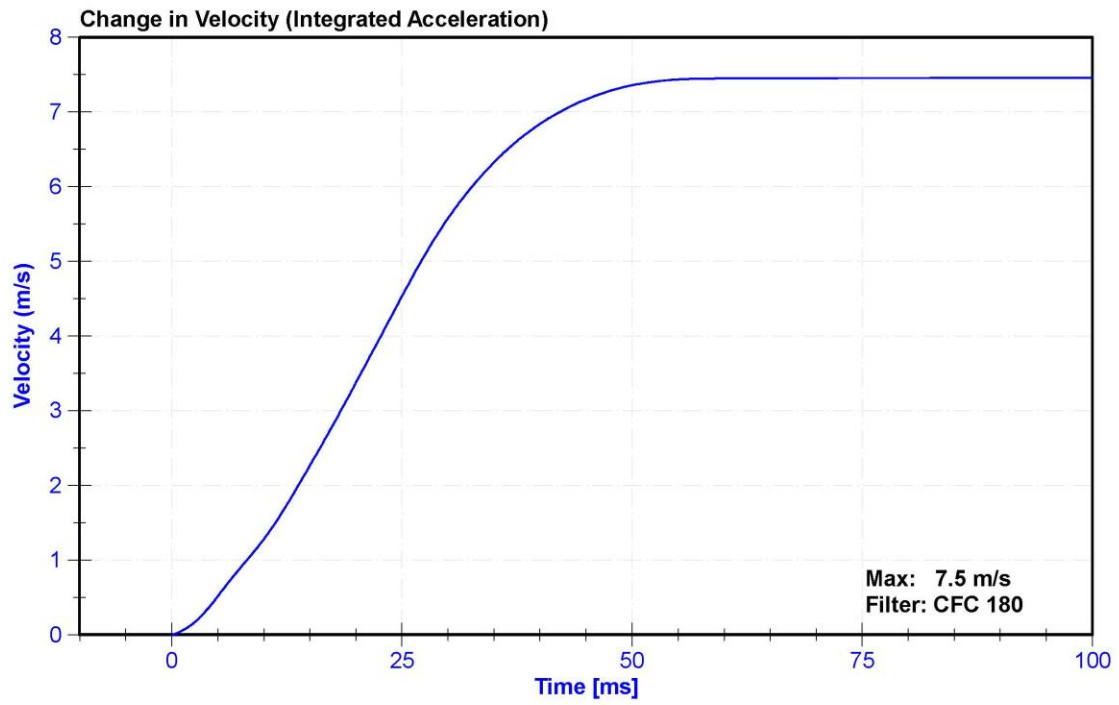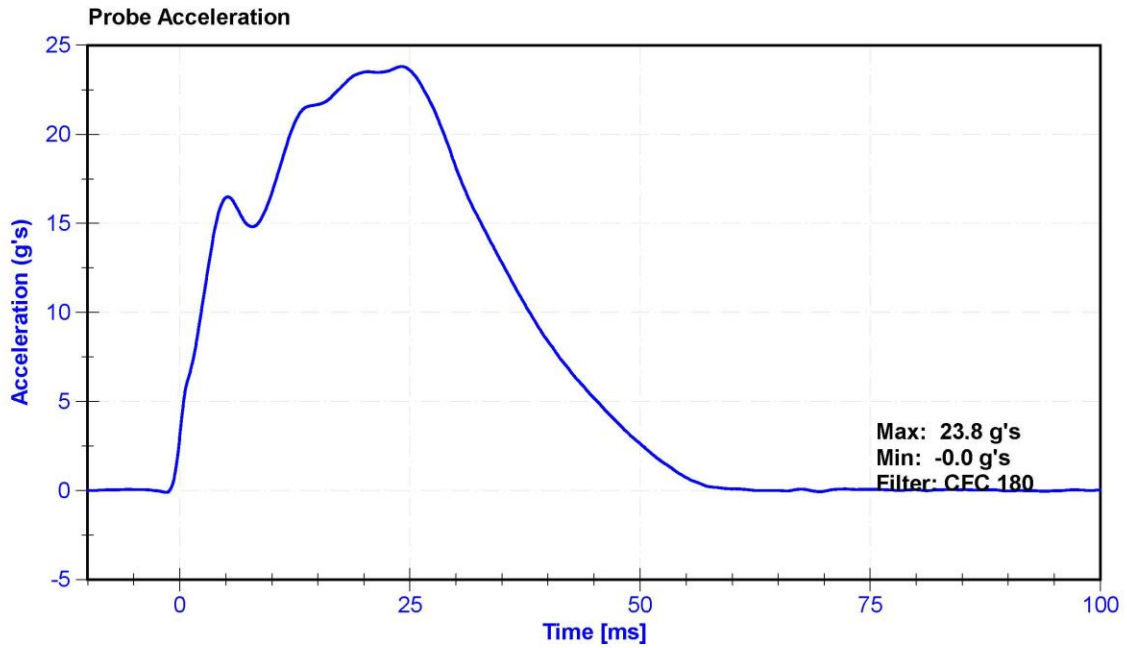


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	22.0	Pass
Humidity	10	70	%	24.2	Pass
Average Velocity	5	10	deg/s	6.9	Pass
Angle at 203Nm	40	50	deg	42.2	Pass
Moment at 30 degrees	0	94.9	Nm	92.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	9/18/2019	9/18/2020
Load Cell	Key Trans 2301-02	LC-115 My	9/12/2019	9/11/2020

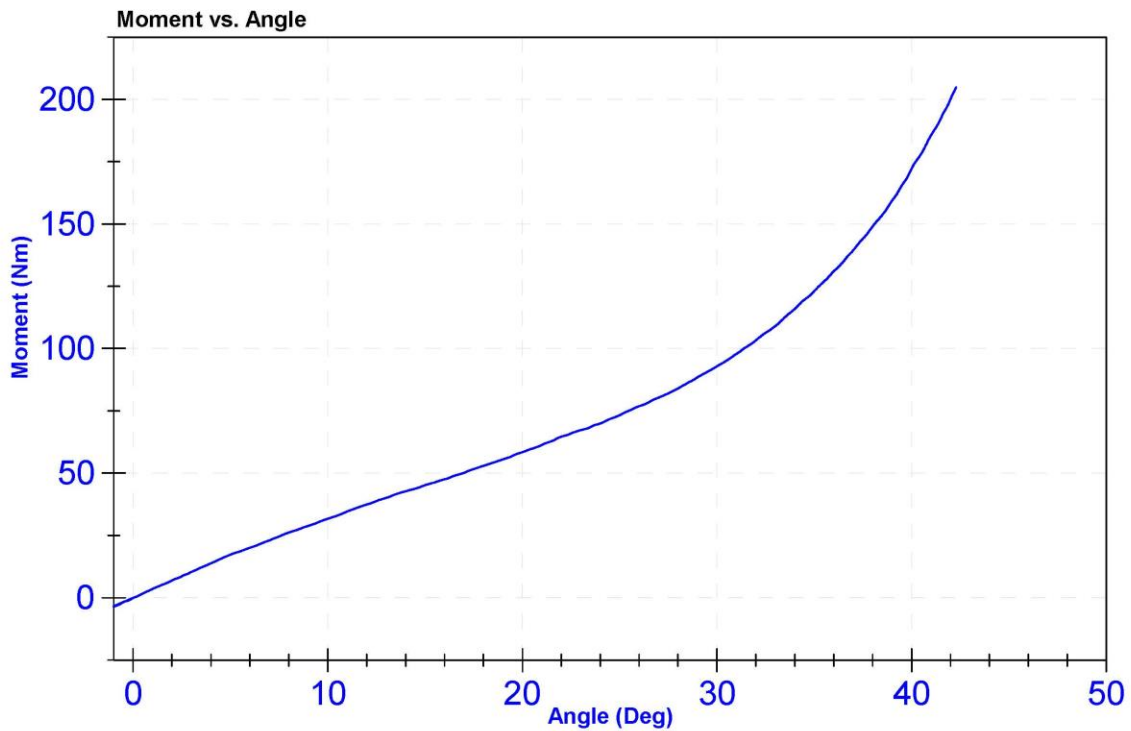


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.4	Pass
Humidity	10	70	%	25.4	Pass
Average Velocity	5	10	deg/s	7.0	Pass
Angle at 203Nm	40	50	deg	45.0	Pass
Moment at 30 degrees	0	94.9	Nm	88.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	9/18/2019	9/18/2020
Load Cell	Key Trans 2301-02	LC-115 My	9/12/2019	9/11/2020

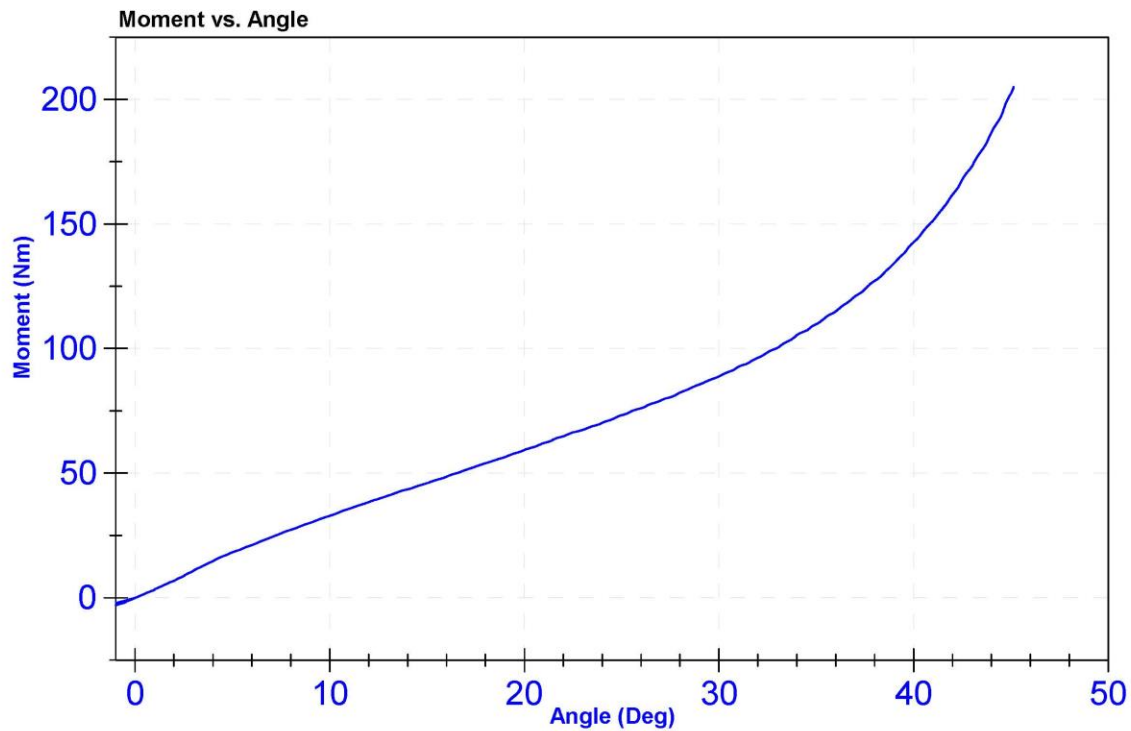


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.1	Pass
Humidity	10	70	%	25	Pass
Velocity	2.07	2.13	m/s	2.117	Pass
Maximum Resistive Force	4720	5780	N	5460.8	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	7/29/2019	1/27/2020

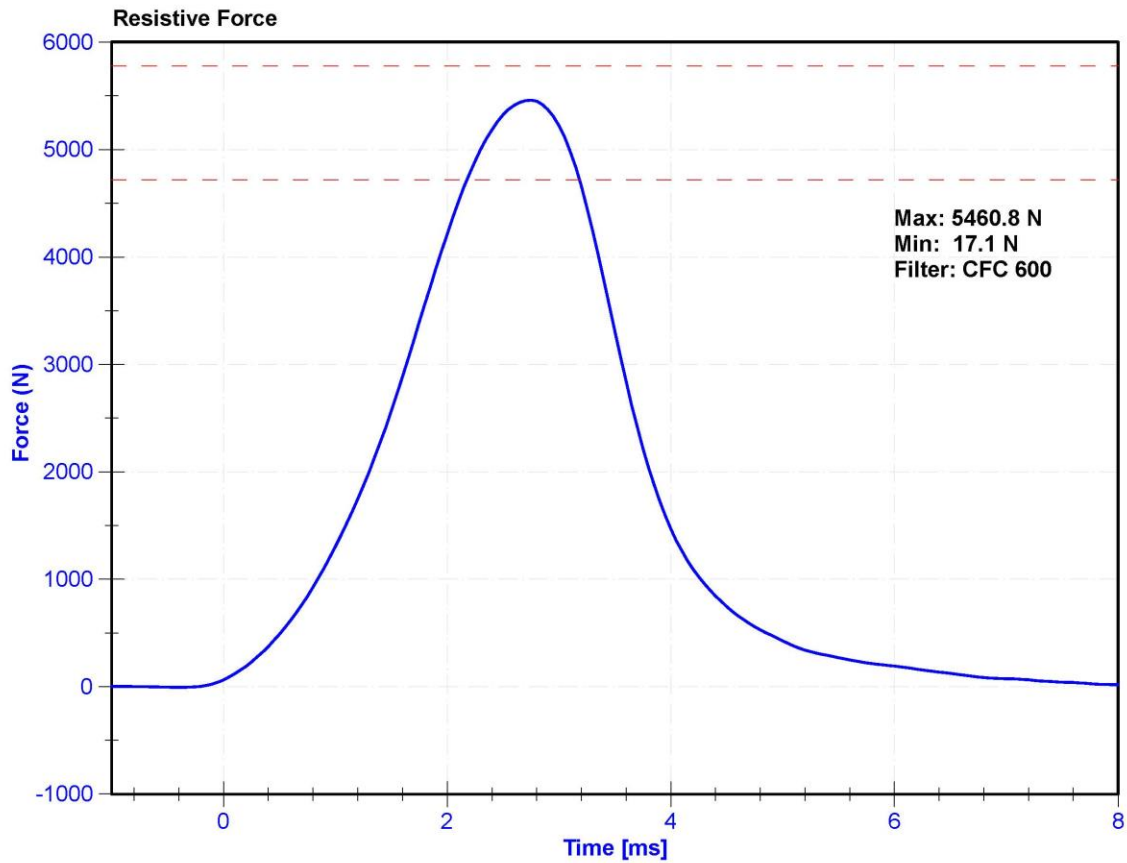

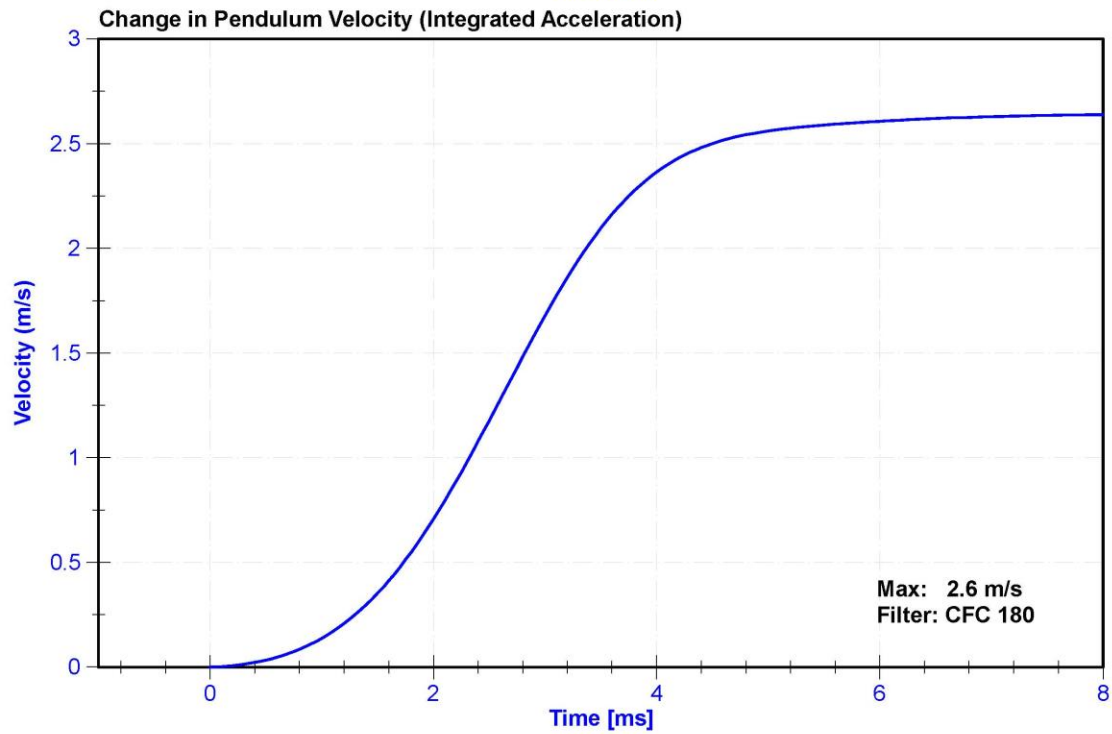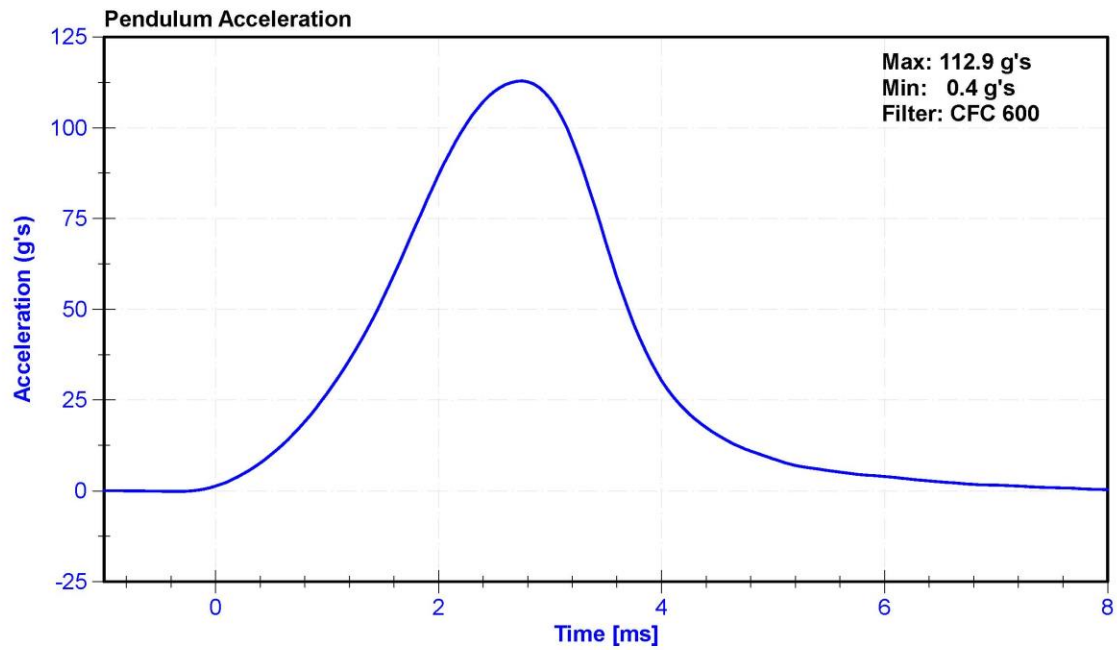


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.1	Pass
Humidity	10	70	%	24.1	Pass
Velocity	2.07	2.13	m/s	2.115	Pass
Maximum Resistive Force	4720	5780	N	5646.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A260568	7/29/2019	1/27/2020

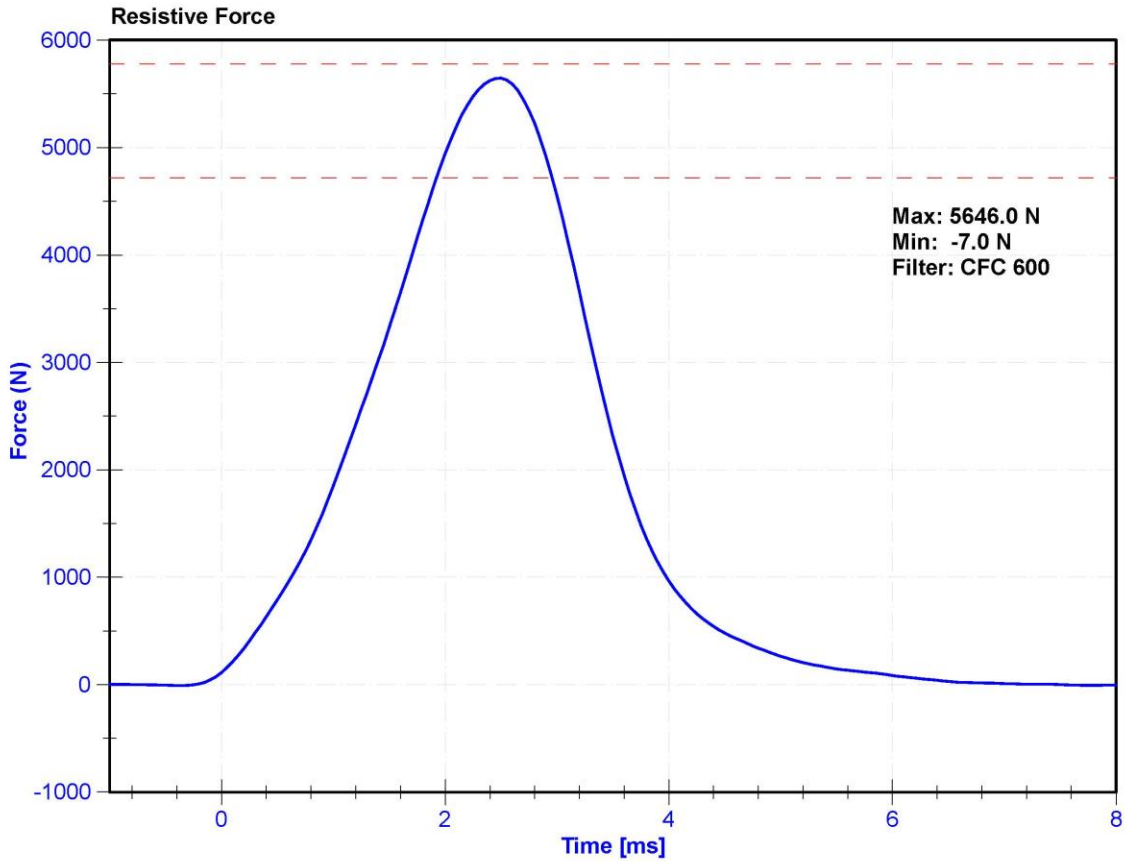

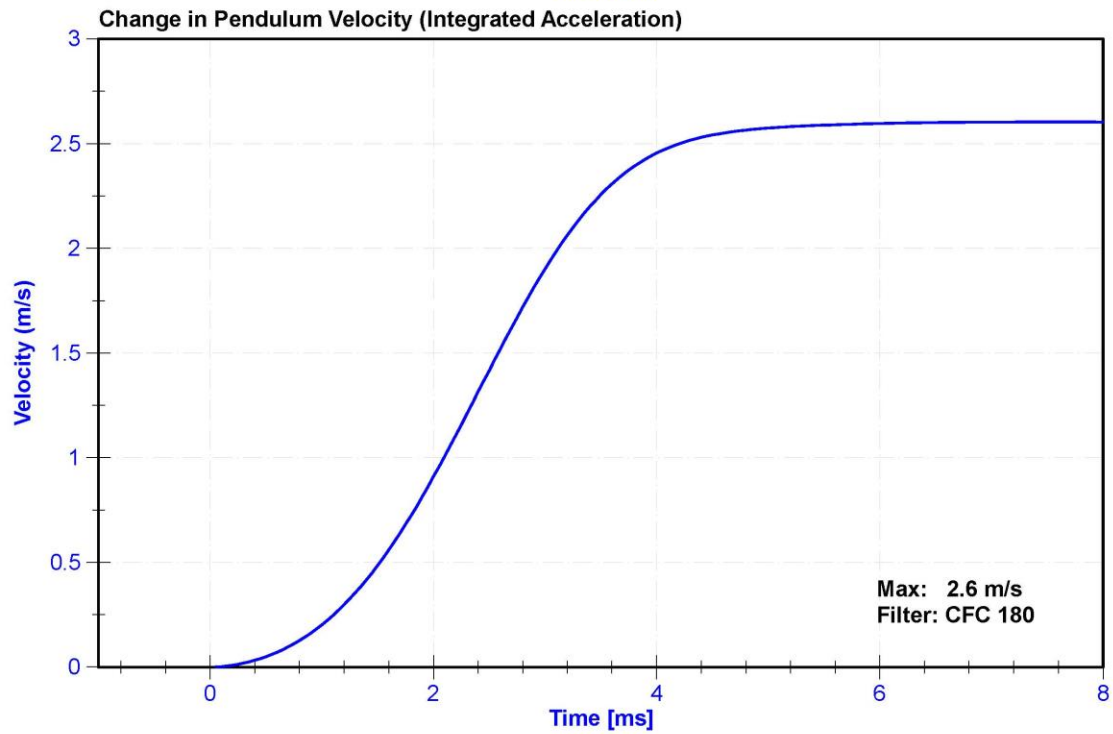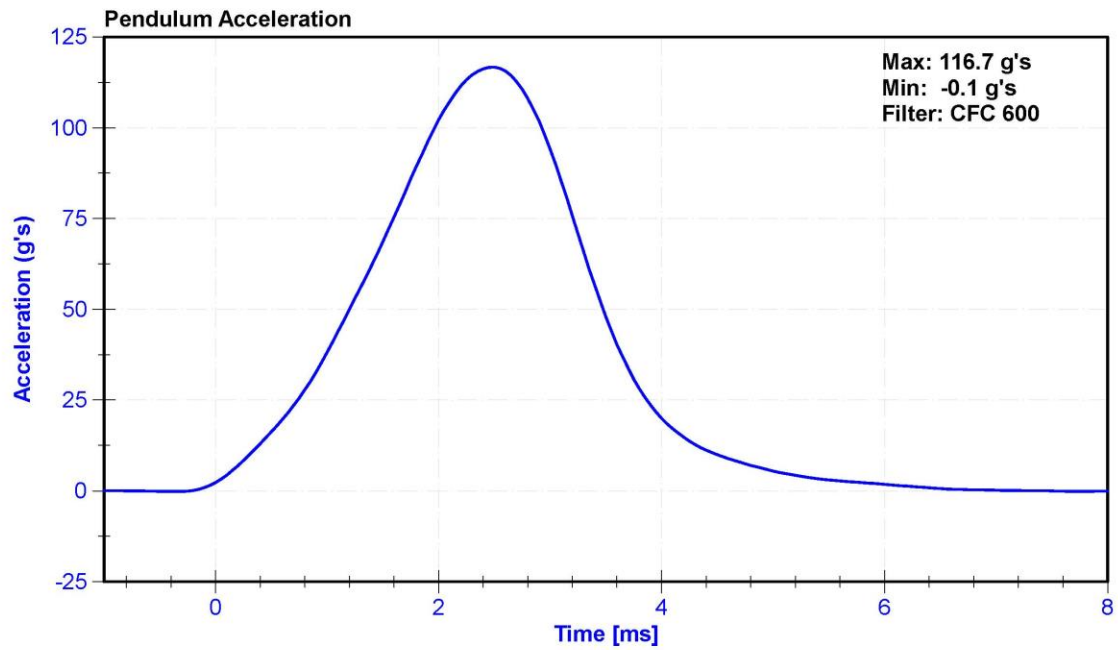

CALIBRATION TEST RESULTS

PRE-TEST

HYBRID III 5TH PERCENTILE - PASSENGER ATD

SERIAL NO: 140




External Measurements - Hybrid 3 - 5th Female

Technician: K. Brogan

Date: 1/09/2020

Dummy Serial Number: 140

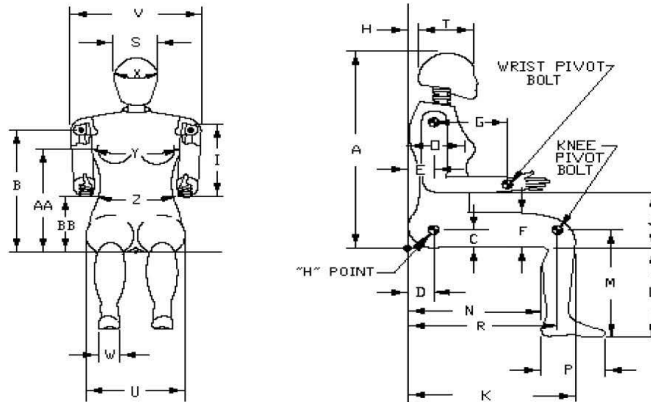

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	775	800	791	Pass
B	Shoulder Pivot Height	432	457	442	Pass
C	H-Point Height	81	86	83	Pass
D	H-Point from Backline	145	150	146	Pass
E	Shoulder Pivot from Backline	69	84	75	Pass
F	Thigh Clearance	119	135	126	Pass
G	Back of Elbow to Wrist Pivot	244	259	250	Pass
H	Head Back to Backline	43	48	45	Pass
I	Shoulder to Elbow Length	277	297	290	Pass
J	Elbow Rest Height	183	203	194	Pass
K	Buttock to Knee Length	521	546	537	Pass
L	Popliteal Height	356	376	366	Pass
M	Knee Pivot Height	394	419	409	Pass
N	Buttock Popliteal Length	414	439	428	Pass
O	Chest Depth without Jacket	175	191	182	Pass
P	Foot Length (right)	219	234	229	Pass
R	Buttock To Knee Pivot Length	457	483	467	Pass
S	Head Breadth	137	147	142	Pass
T	Head Depth	178	188	180	Pass
U	Hip Breadth	300	315	313	Pass
V	Shoulder Breadth	351	366	361	Pass
W	Foot Breadth	79	94	83	Pass
X	Head Circumference	528	549	540	Pass
Y	Chest Circumference with Jacket	851	881	874	Pass
Z	Waist Circumference	460	790	624	Pass
AA	Reference Location (Chest Circumference)	333	358	345	Pass
BB	Reference Location (Waist Circumference)	160	170	165	Pass


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	140	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	20.7	Pass
Resultant Acceleration	250	300	g's	267.3	Pass
Oscillation	0	10	%	2.2	Pass
Lateral Acceleration	-15	15	g's	5.6	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	Endevco	P58998	9/30/2019	3/30/2020
Y Accelerometer	Endevco	P51722	9/30/2019	3/30/2020
Z Accelerometer	Endevco	P58997	9/30/2019	3/30/2020

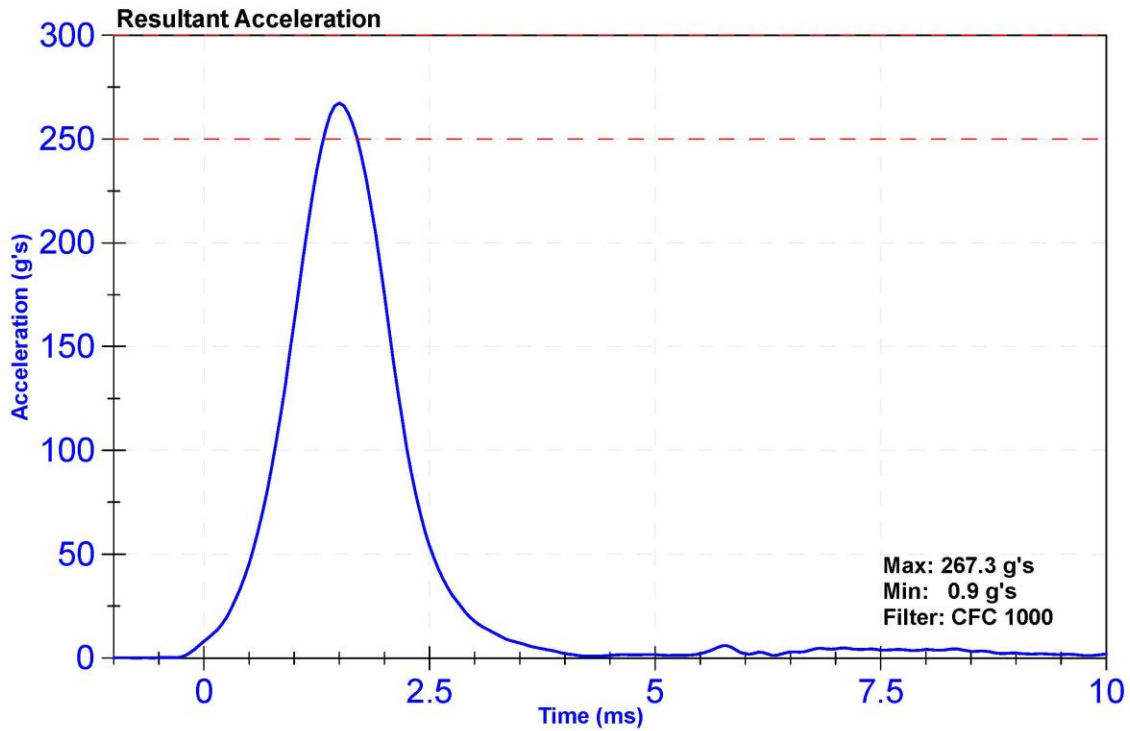

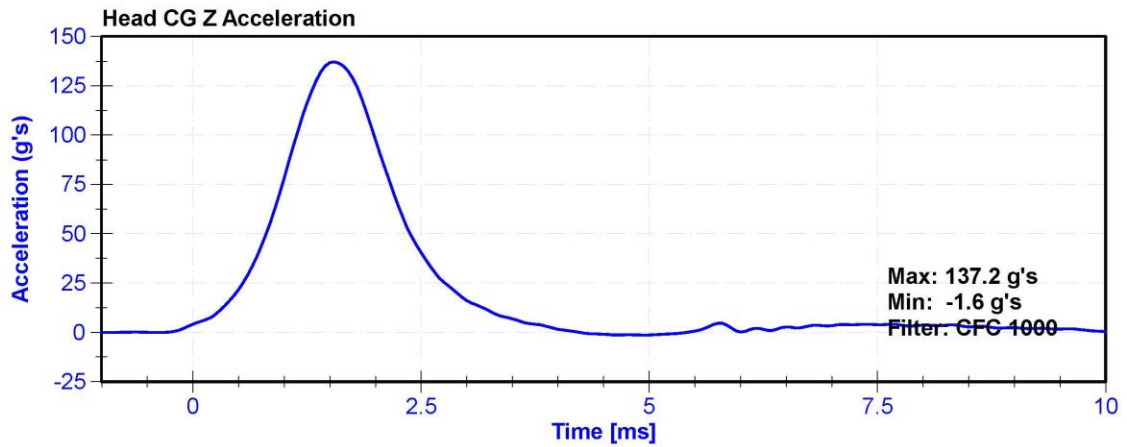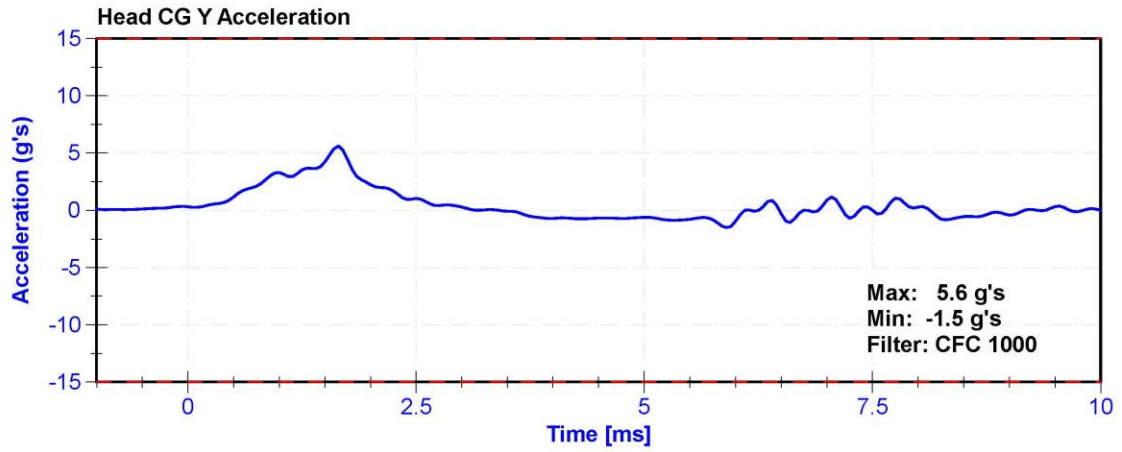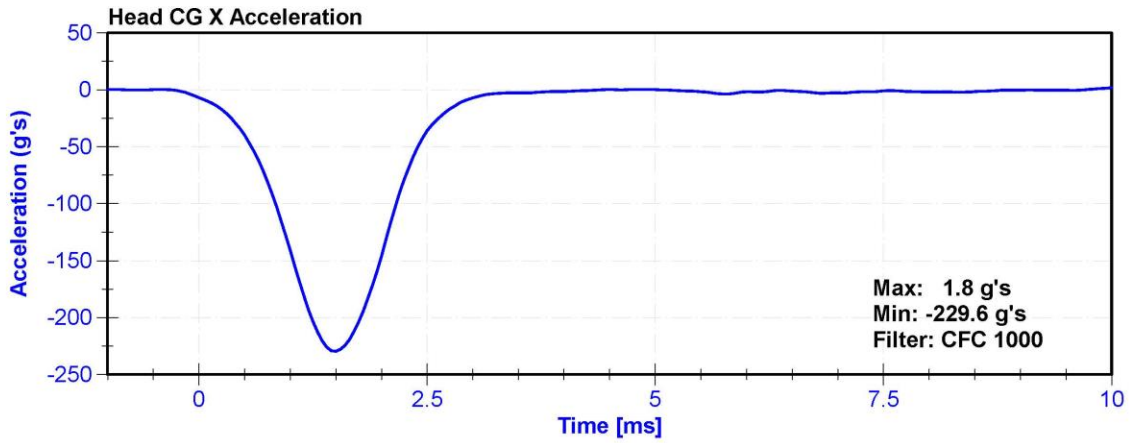


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



Results




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.3	Pass
Humidity	10	70	%	20.7	Pass
Velocity	6.89	7.13	m/s	7.013	Pass
Pendulum Impulse at 10ms	2.1	2.5	m/s	2.46	Pass
Pendulum Impulse at 20ms	4.0	5.0	m/s	4.82	Pass
Pendulum Impulse at 30ms	5.8	7.0	m/s	6.88	Pass
Max D Plane Rotation	77	91	deg	81.8	Pass
Max Moment During Rotation Interval	69	83	Nm	74.7	Pass
Moment Decay to 10.0 Nm	80	100	ms	89.6	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	DENTON 1716A	LC-2206Fx	2/18/2019	2/18/2020

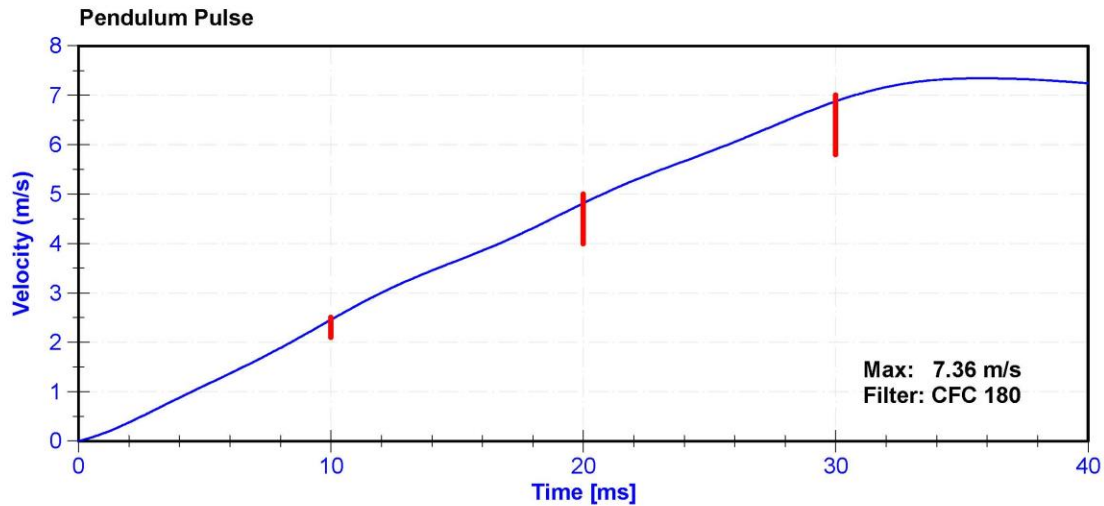

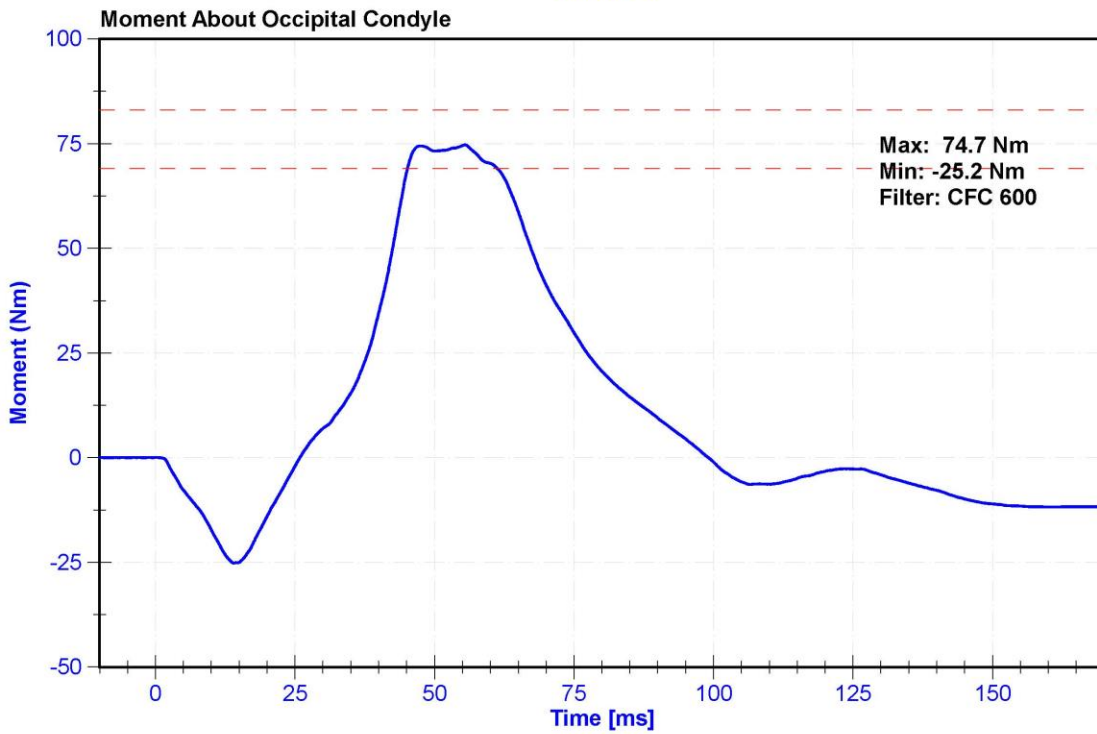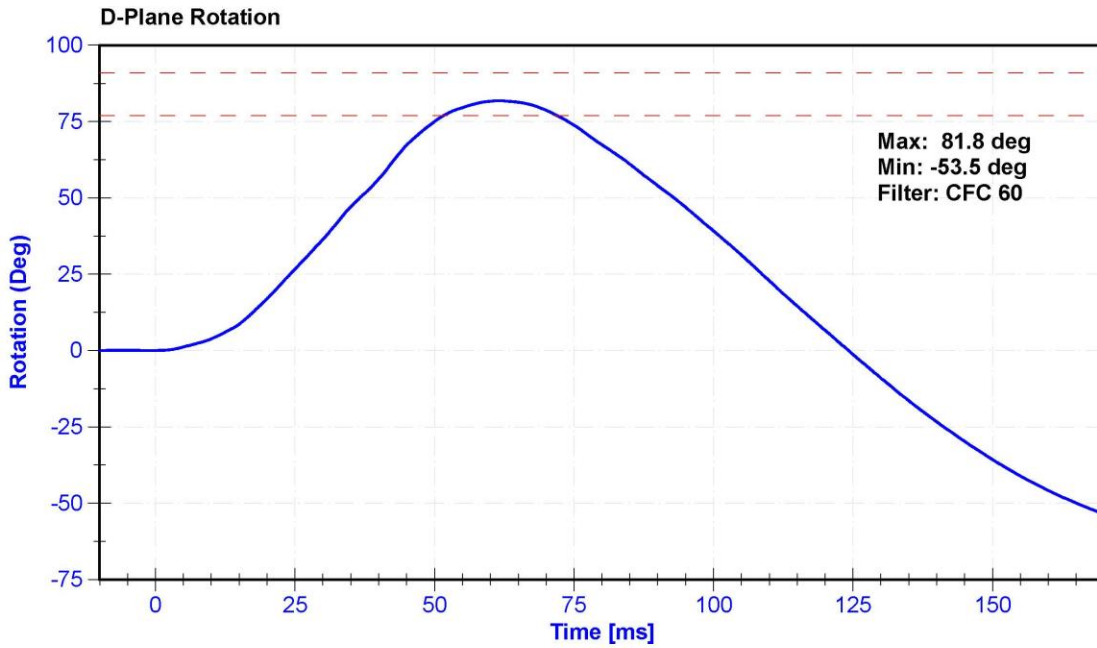

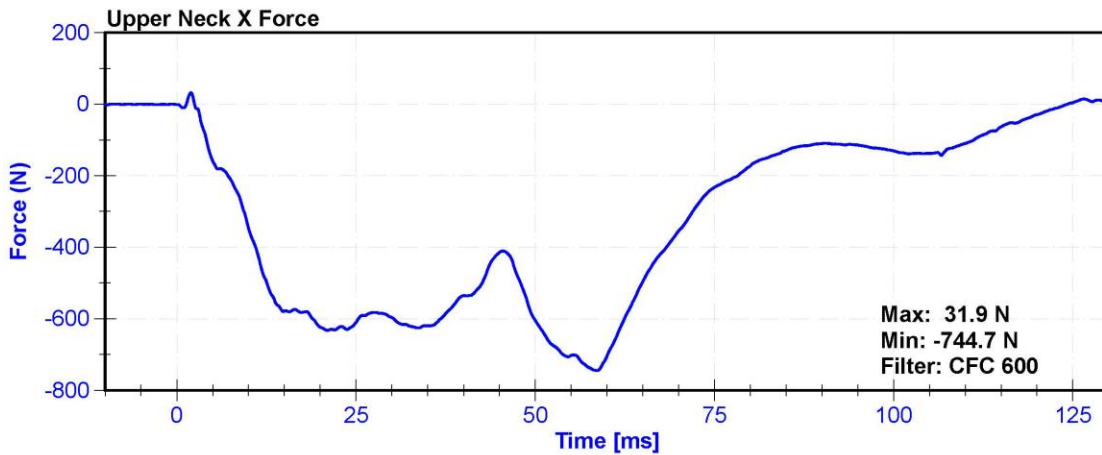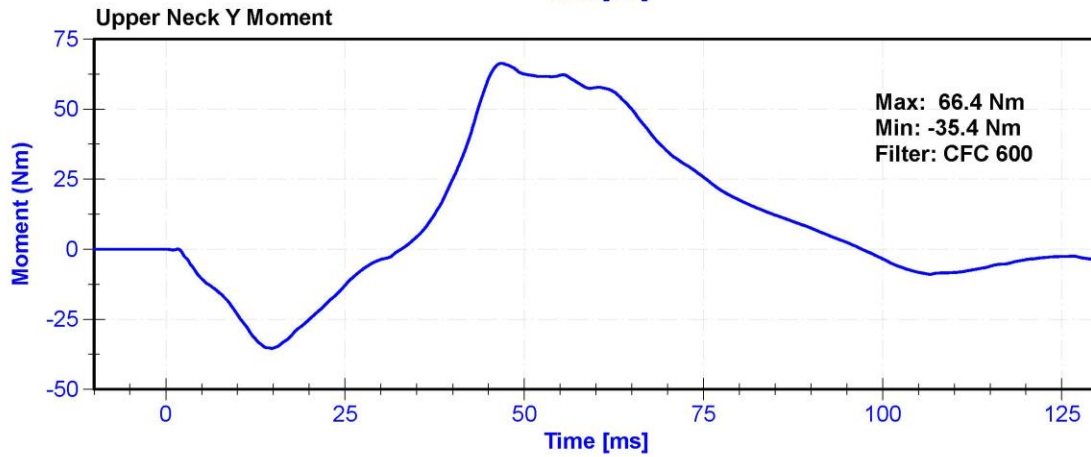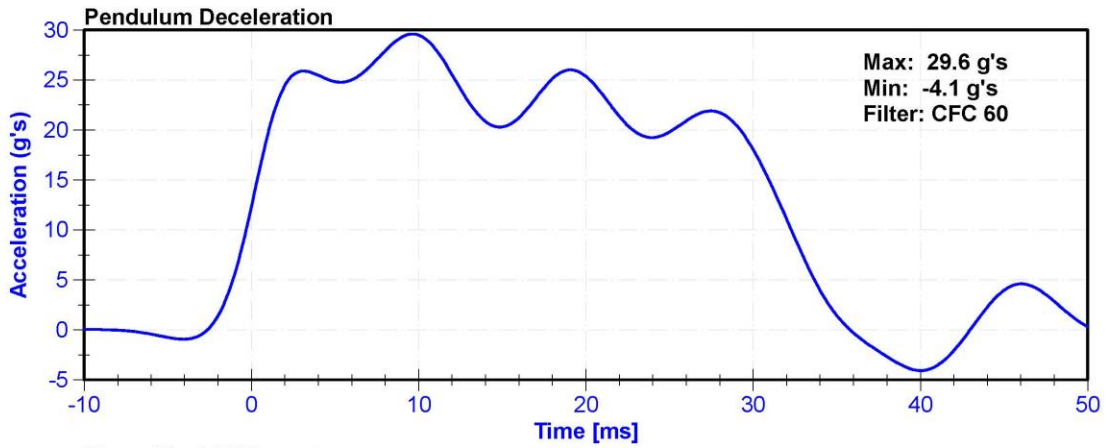


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



Results




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.3	Pass
Humidity	10	70	%	20.7	Pass
Velocity	5.95	6.19	m/s	6.046	Pass
Pendulum Impulse at 10ms	1.5	1.9	m/s	1.80	Pass
Pendulum Impulse at 20ms	3.1	3.9	m/s	3.72	Pass
Pendulum Impulse at 30ms	4.6	5.6	m/s	5.36	Pass
D Plane Rotation	99	114	deg	101.5	Pass
Moment During Rotation Interval	-65	-53	Nm	-61.1	Pass
Moment Decay to -10Nm	94	114	ms	103.8	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	DENTON 1716A	LC-2206Fx	2/18/2019	2/18/2020

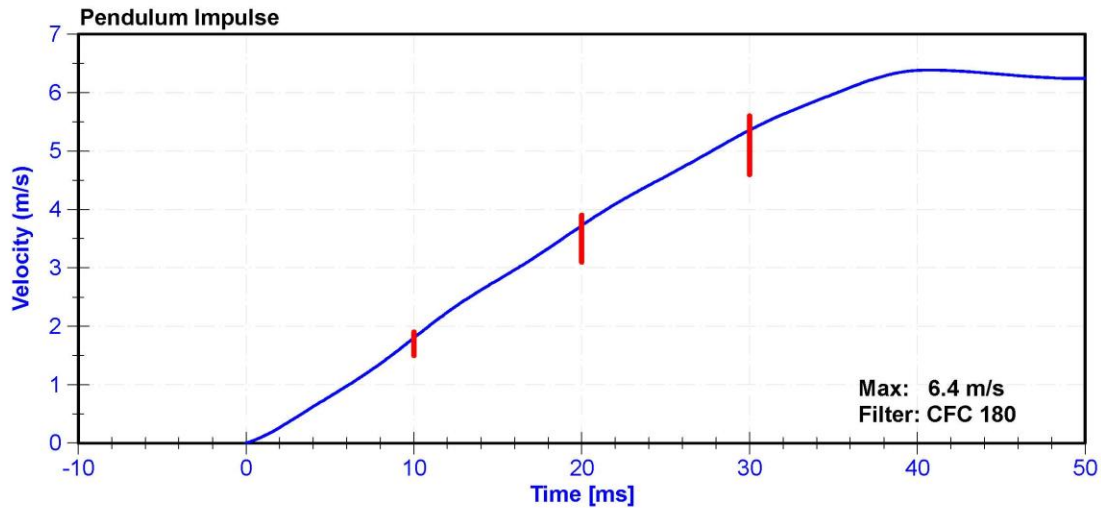

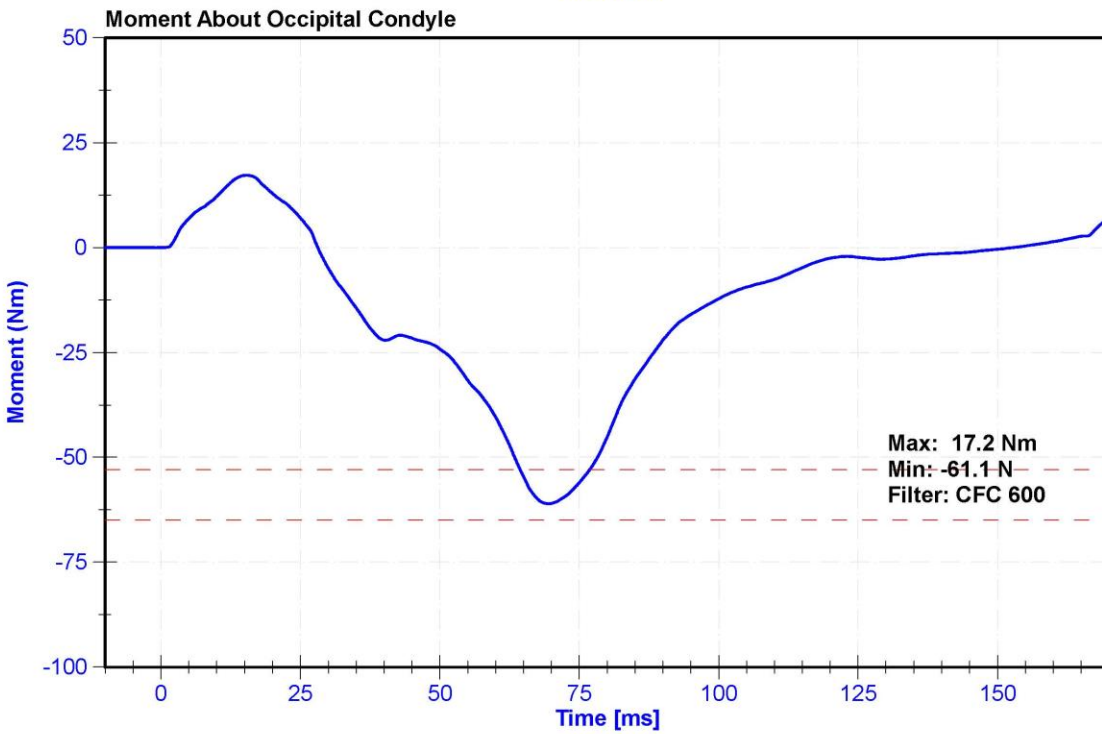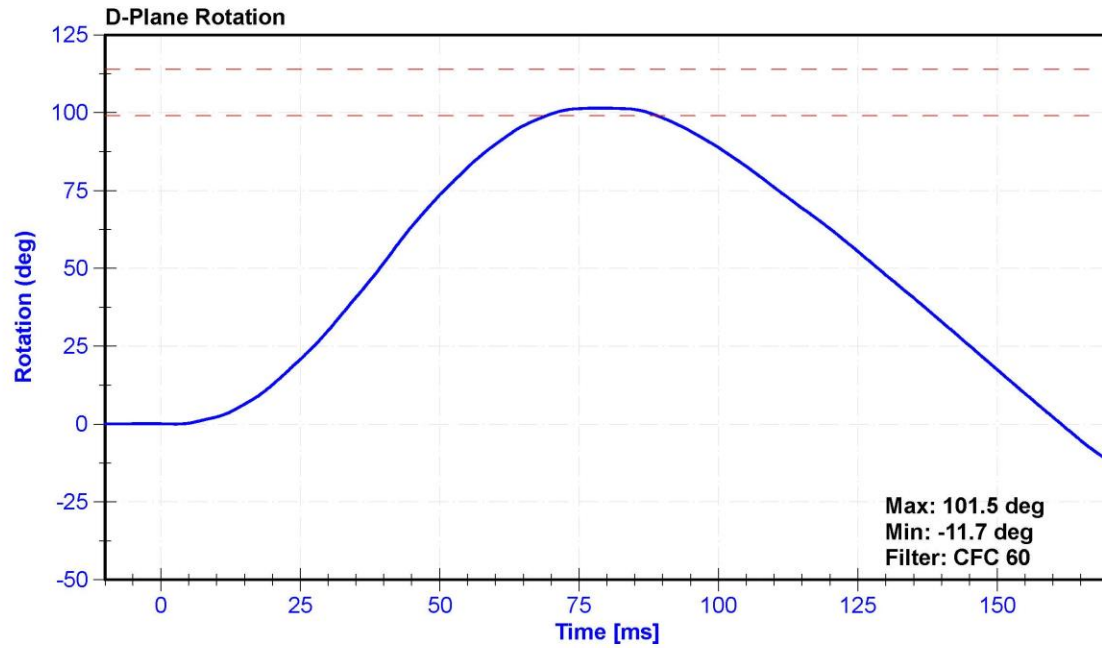

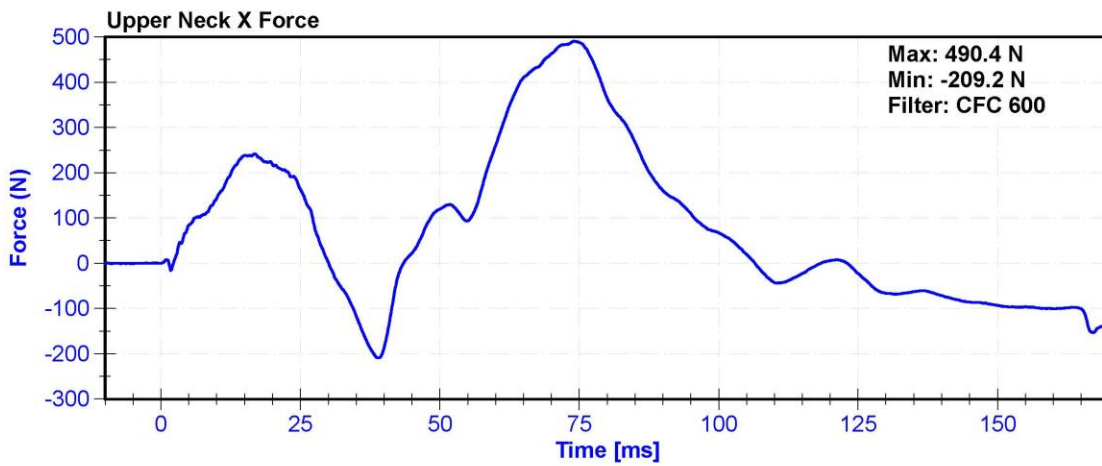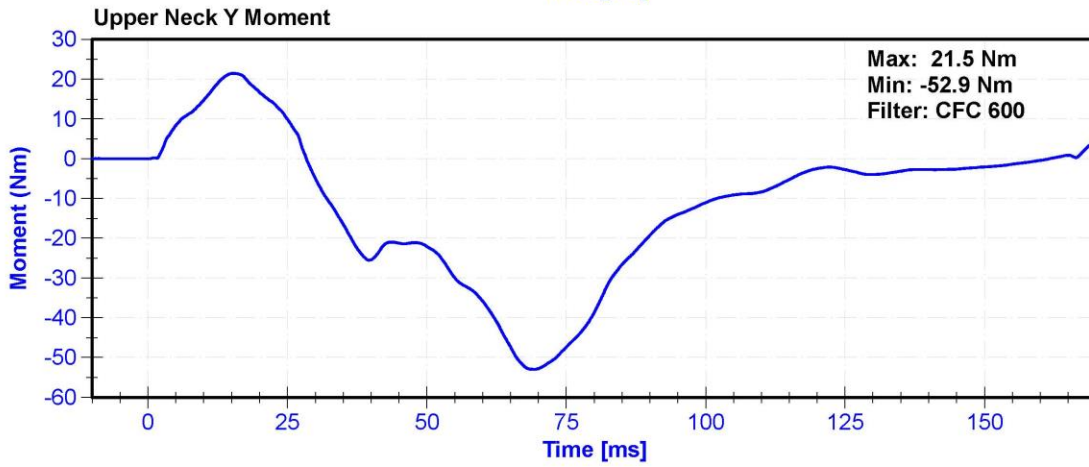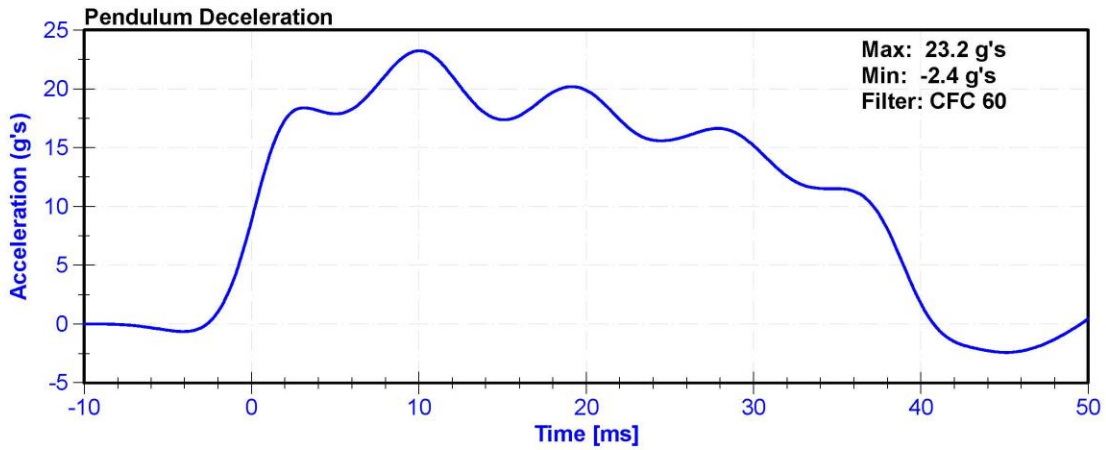


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.8	Pass
Humidity	10	70	%	32	Pass
Velocity	6.59	6.83	m/s	6.641	Pass
Chest Deflection	-58	-50	mm	-51.8	Pass
Maximum Resistive Force (50 to 58mm)	3900	4400	N	4173.6	Pass
Maximum Resistive Force (18 to 50mm)	0	4600	N	4182.3	Pass
Hysteresis	69	85	%	75.1	Pass


Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A286228	9/27/2019	3/27/2020
Chest Potentiometer	SERVO 14CBI-3615	DS-140GFE	6/21/2019	6/20/2020

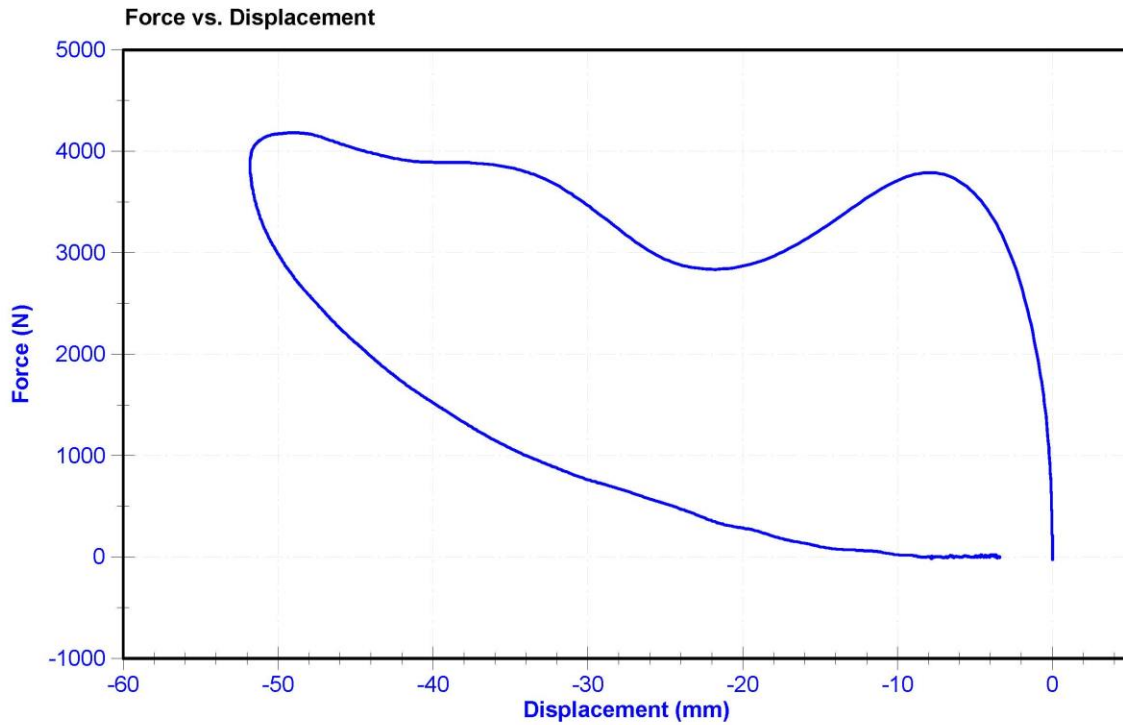


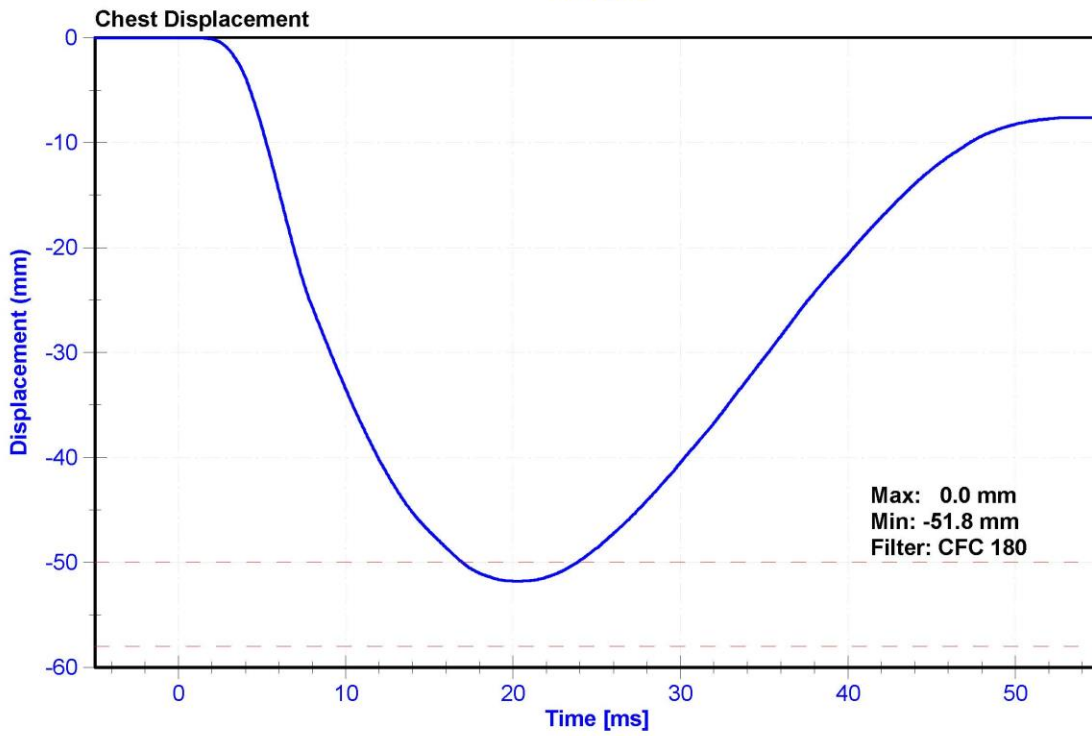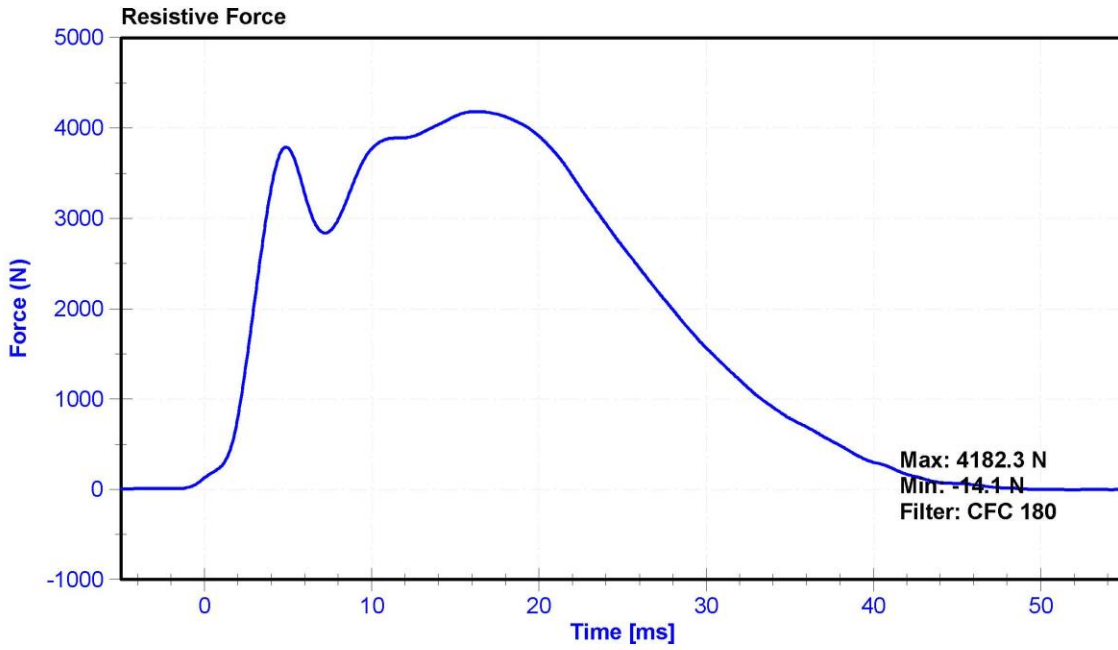

Probe Acceleration

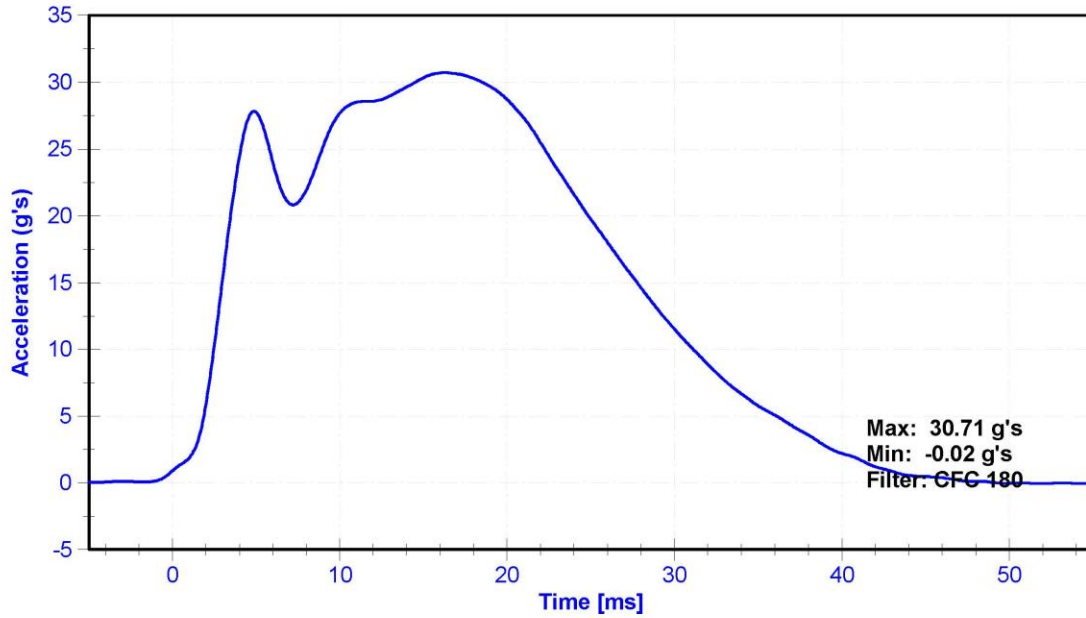

Change in Velocity (Integrated Acceleration)

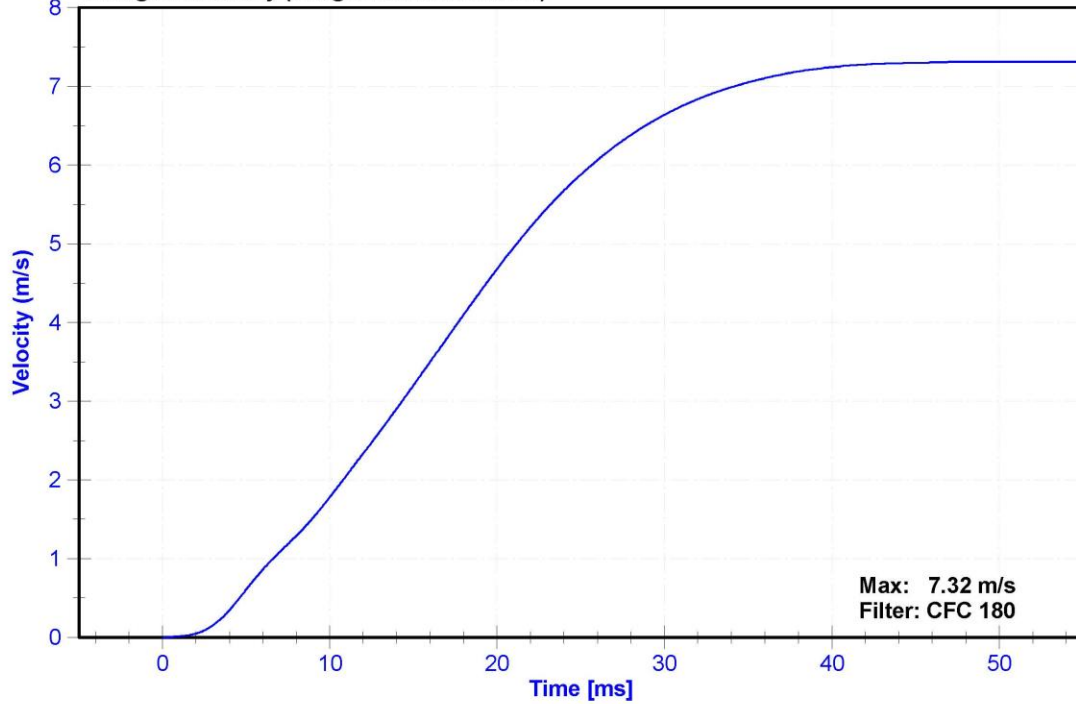


ATD Manufacturer	Humanetics	Test Technician	D.Reinhard
ATD Serial Number	140	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.6	25.6	°C	22	Pass
Humidity	10	70	%	29	Pass
Initial Angle	0	20	deg	17.2	Pass
Force at 45 Degrees	320	390	N	378.7	Pass
Return Angle Relative to Initial	0	8	deg	1.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	Rieker N4C-1	DS-13051548	12/9/2019	12/8/2020
Load Cell	Interface SML-200	LC-493319	1/10/2020	1/9/2021

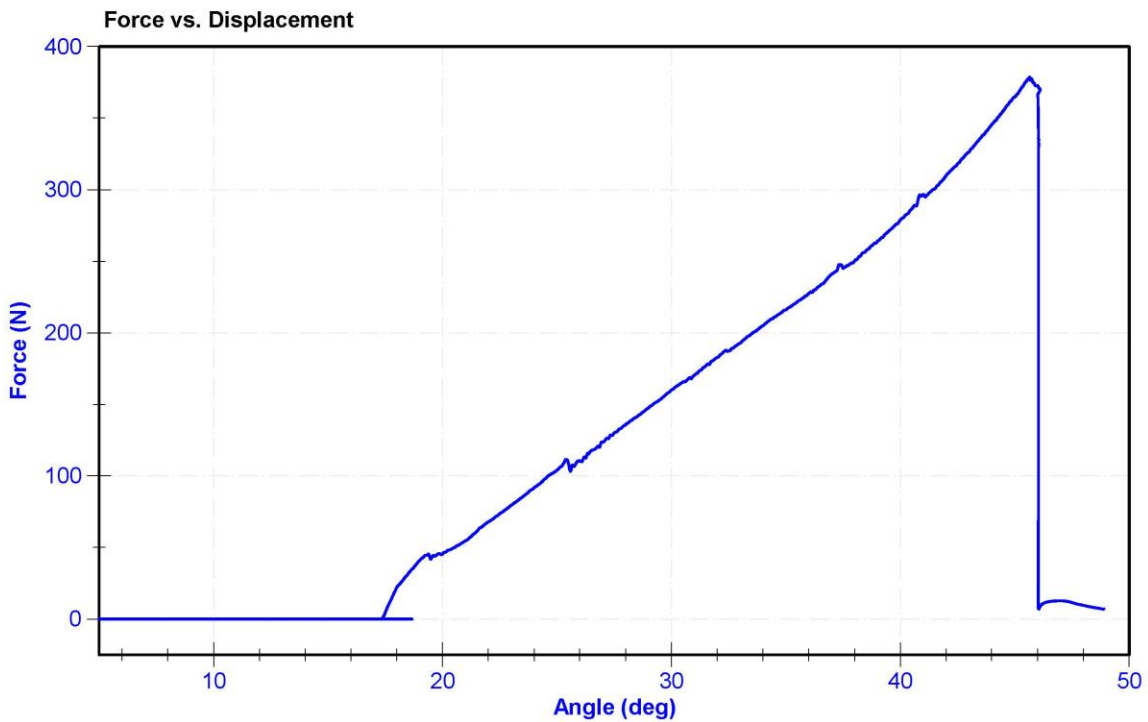


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.3	Pass
Humidity	10	70	%	20.7	Pass
Velocity	2.07	2.13	m/s	2.076	Pass
Resistive Force	3450	4060	N	4024.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	Measurement Specialties	A260568	7/29/2019	7/29/2020

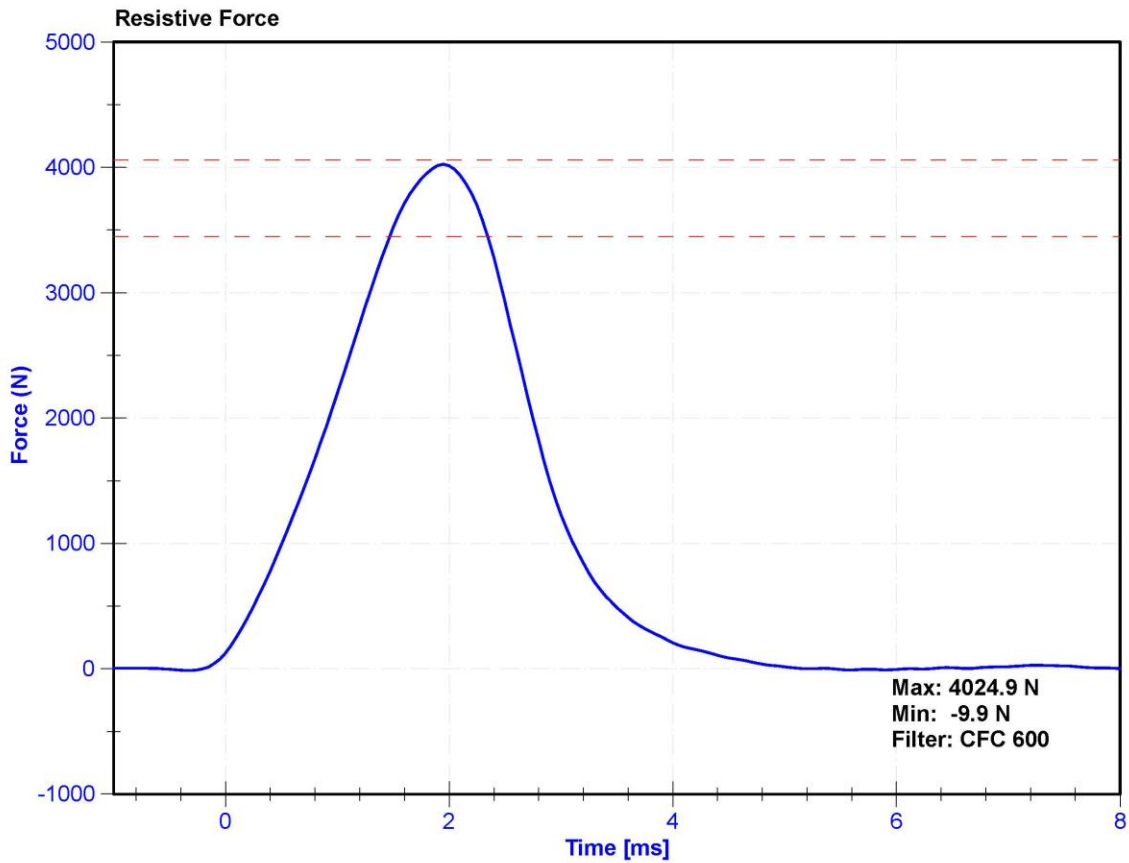

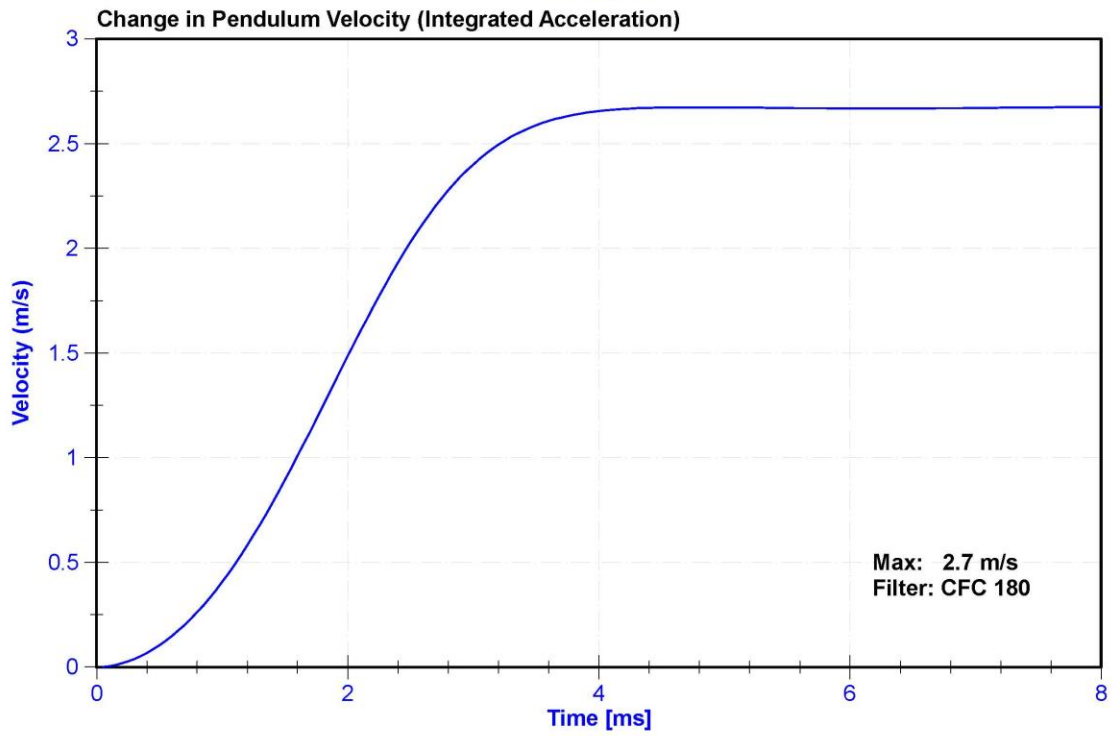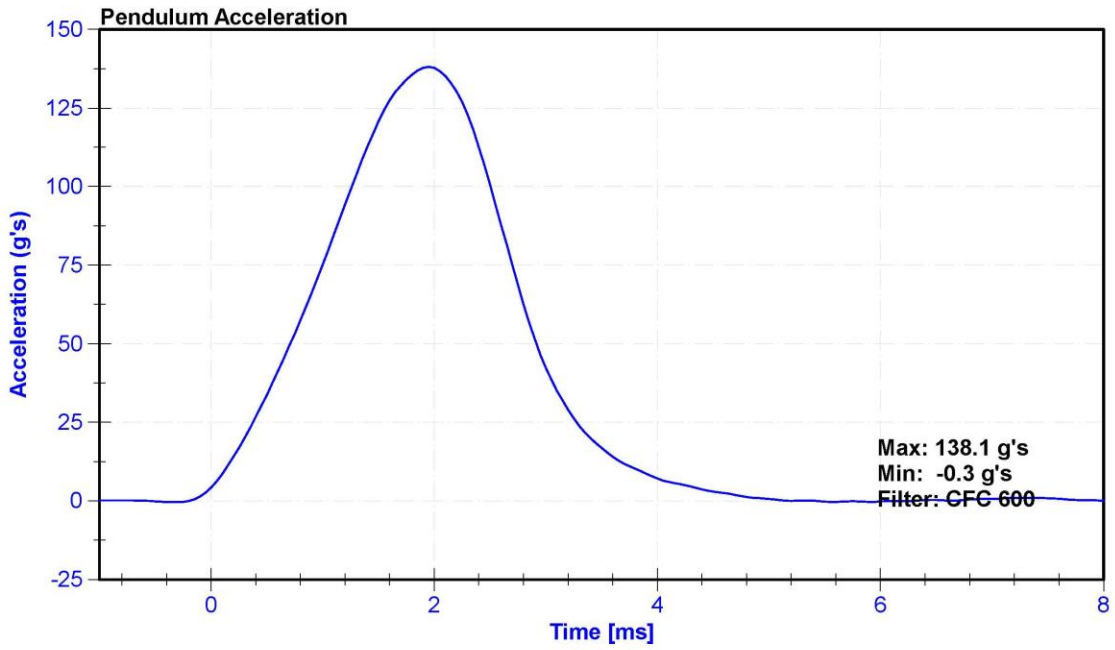


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.3	Pass
Humidity	10	70	%	20.7	Pass
Velocity	2.07	2.13	m/s	2.078	Pass
Resistive Force	3450	4060	N	3552.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	Measurement Specialties	A260568	7/29/2019	7/29/2020

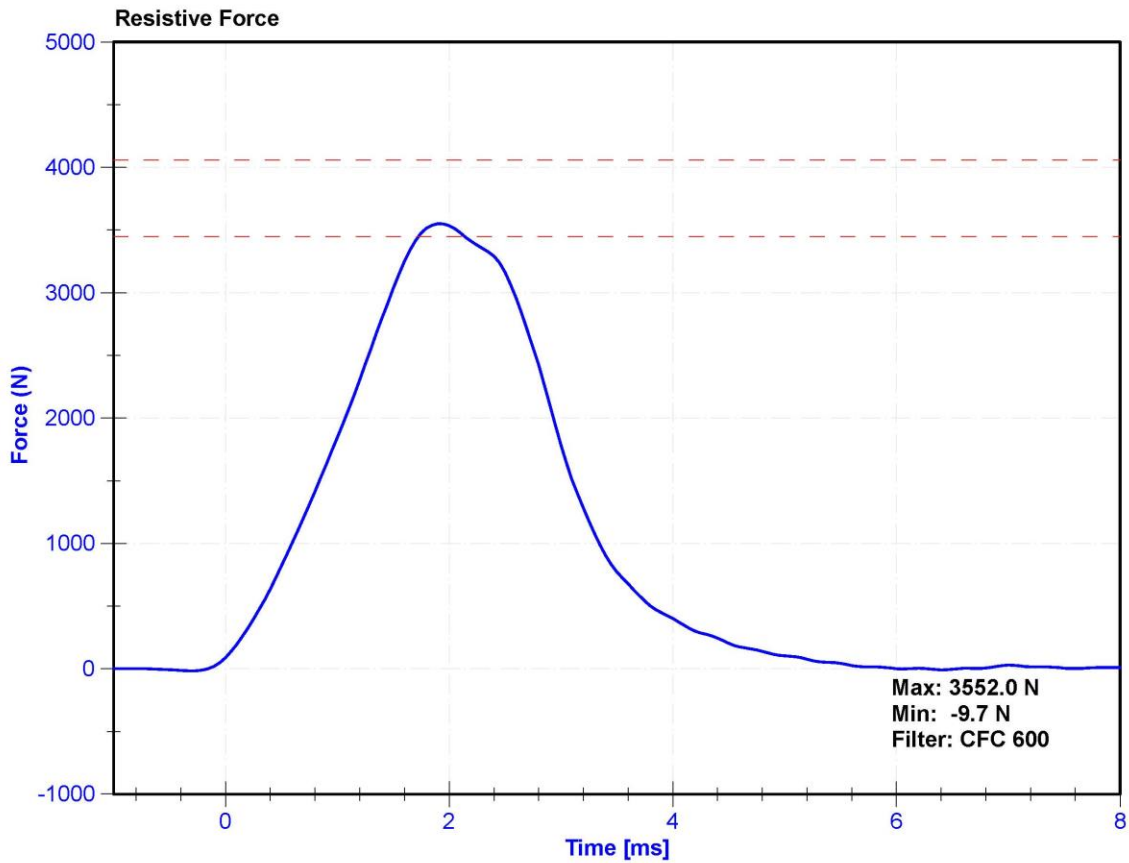

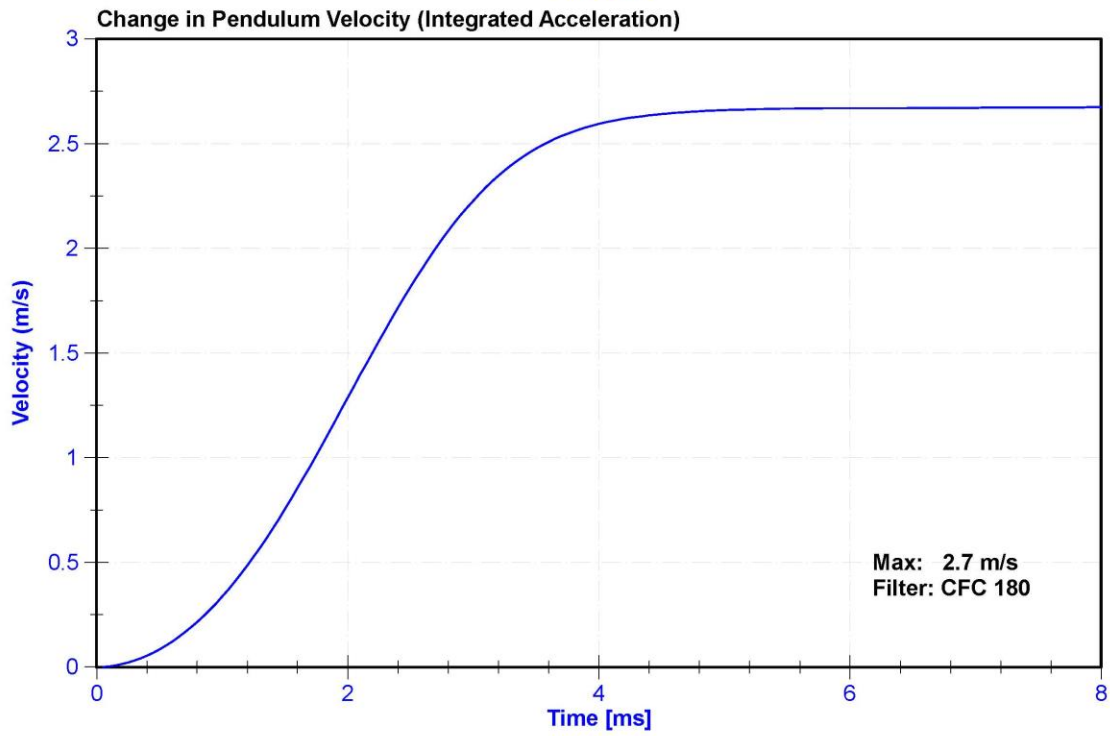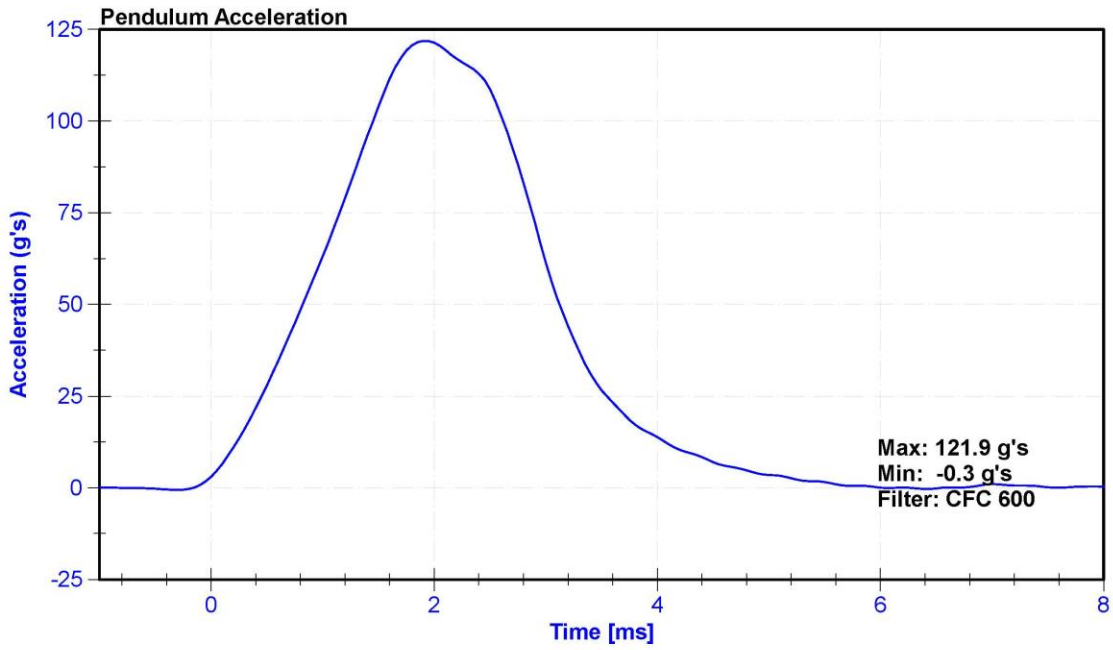

CALIBRATION TEST RESULTS

POST-TEST

HYBRID III 50TH PERCENTILE MALE - DRIVER ATD

SERIAL NO: 142




External Measurements - Hybrid 3 - 50th Male

Technician: K. Dutton

Date: 01/17/2020

Dummy Serial Number: 142

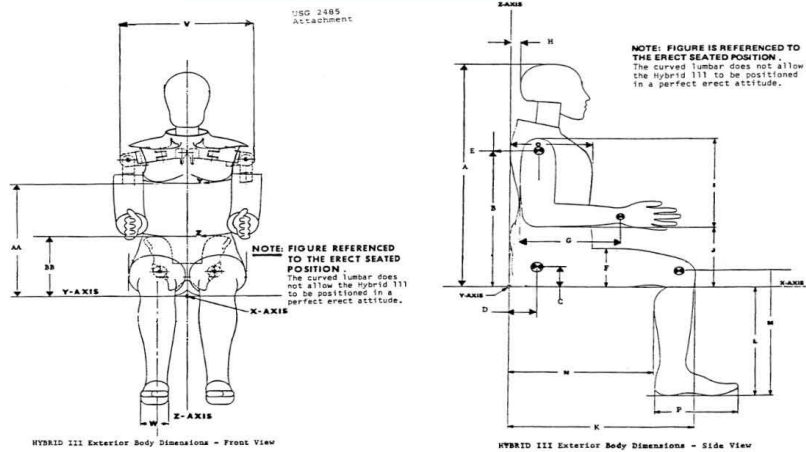

Symbol	Description	Specification (in)		Result (in)	Pass/Fail
A	Sitting Height	34.6	35.0	34.8	Pass
B	Shoulder Pivot Height	19.9	20.5	20.2	Pass
C	H-Point Height	3.3	3.5	3.4	Pass
D	H-Point from Backline	5.3	5.5	5.4	Pass
E	Shoulder Pivot from Backline	3.3	3.7	3.6	Pass
F	Thigh Clearance	5.5	6.1	5.8	Pass
G	Back of Elbow to Wrist Pivot	11.4	12.0	11.7	Pass
H	Head Back to Backline	1.6	1.8	1.7	Pass
I	Shoulder to Elbow Length	13.0	13.6	13.4	Pass
J	Elbow Rest Height	7.5	8.3	8.2	Pass
K	Buttock to Knee Length	22.8	23.8	23.4	Pass
L	Popliteal Height	16.9	17.9	17.3	Pass
M	Knee Pivot Height	19.1	19.7	19.5	Pass
N	Buttock Popliteal Length	17.8	18.8	18.4	Pass
O	Chest Depth without Jacket	8.4	9.0	8.7	Pass
P	Foot Length (right)	9.9	10.5	10.3	Pass
V	Shoulder Breadth	16.3	17.2	16.9	Pass
W	Foot Breadth	3.6	4.2	3.8	Pass
Y	Chest Circumference with Jacket	38.2	39.4	38.8	Pass
Z	Waist Circumference	32.9	34.1	33.7	Pass
AA	Reference Location (Chest Circumference)	16.9	17.1	17.0	Pass
BB	Reference Location (Waist Circumference)	8.9	9.1	9.0	Pass


ATD Manufacturer	Humanetics	Test Technician	C. Mantell
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	20.9	Pass
Humidity	10	70	%	19.7	Pass
Resultant Acceleration	225	275	g's	264.2	Pass
Oscillation	0	10	%	5.3	Pass
Lateral Acceleration	-15	15	g's	-8.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264	P51681	8/13/2019	2/11/2020
Y Accelerometer	ENDEVCO 7264	P64151	8/13/2019	2/11/2020
Z Accelerometer	ENDEVCO 7264	P52114	8/13/2019	2/11/2020

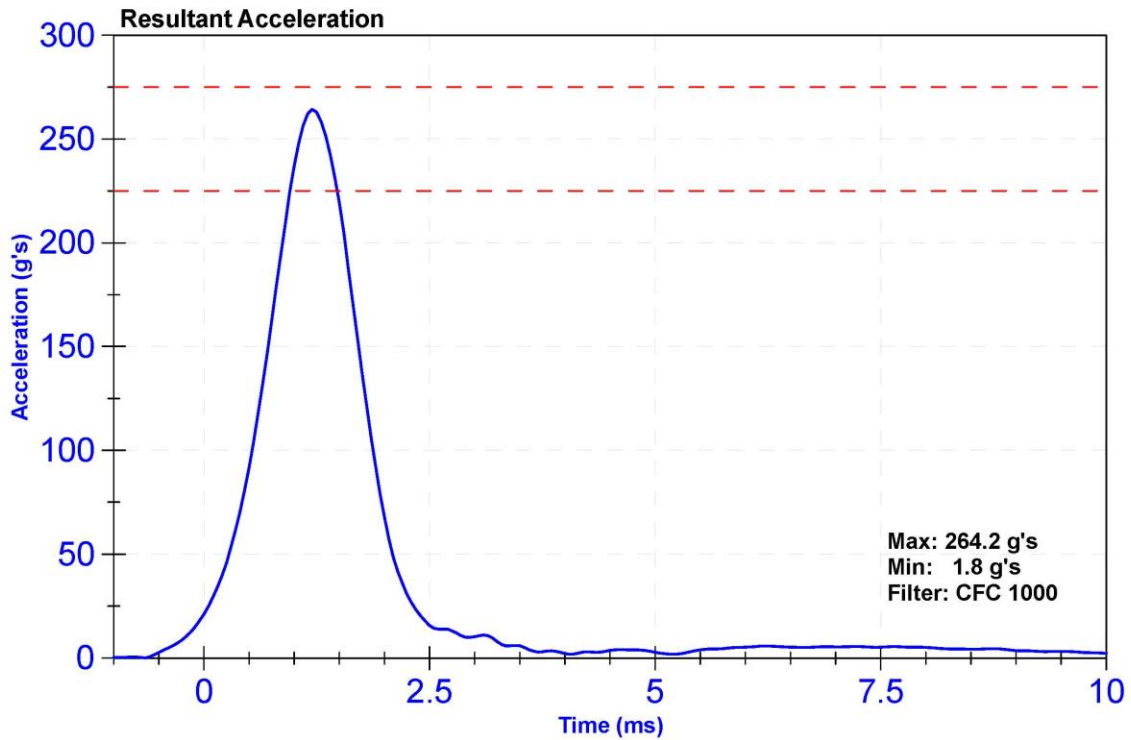

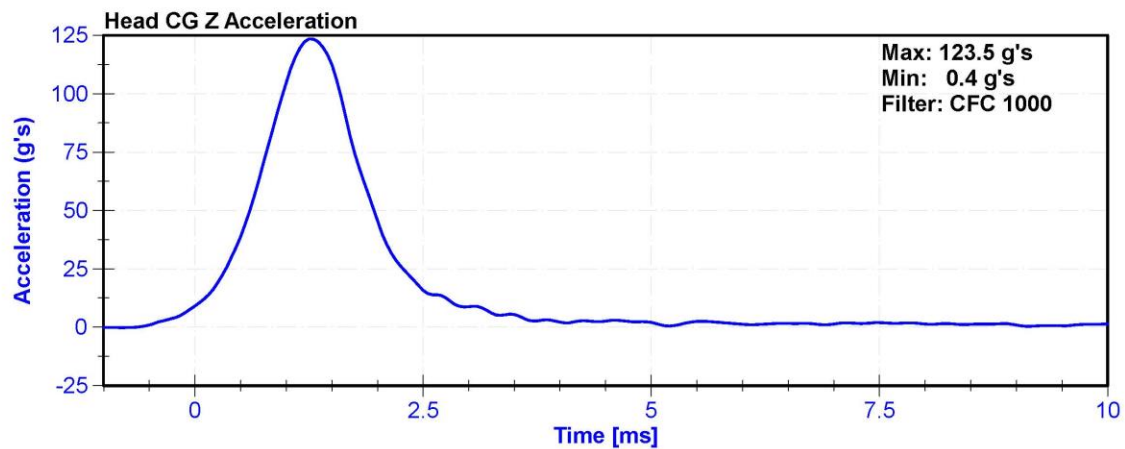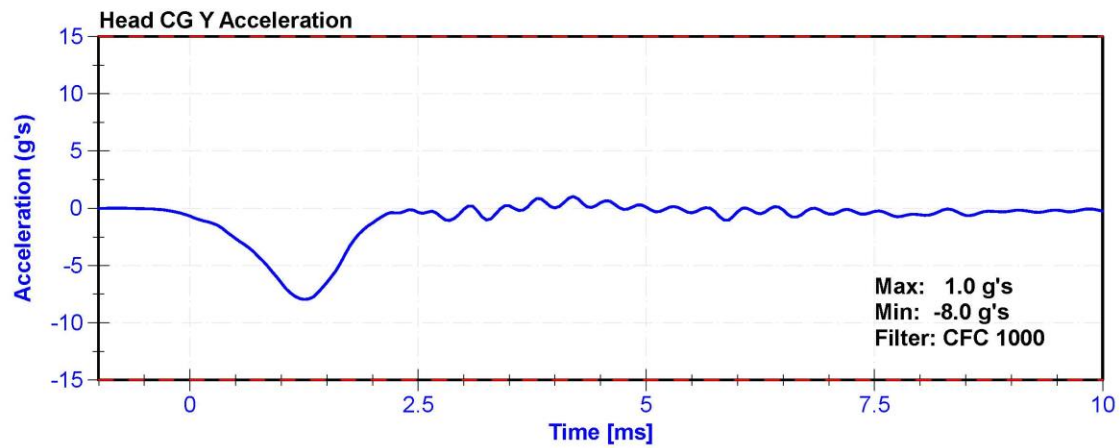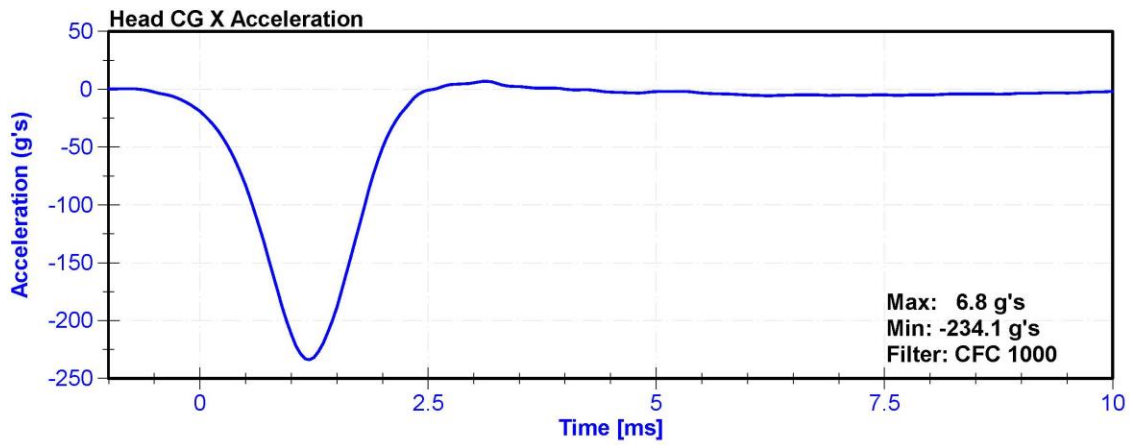



ATD Manufacturer	Humanetics	Test Technician	C. Mantell
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	18.3	Pass
Velocity	6.89	7.13	m/s	6.903	Pass
Pendulum Deceleration at 10ms	22.5	27.5	g's	26.41	Pass
Pendulum Deceleration at 20ms	17.6	22.6	g's	21.79	Pass
Pendulum Deceleration at 30ms	12.5	18.5	g's	15.86	Pass
Max. Pendulum Deceleration After 30ms	0	29	g's	26.6	Pass
Pendulum Deceleration Time to 5 g's	34	42	ms	39.3	Pass
Maximum D Plane Rotation	64	78	deg	75.2	Pass
Time to Maximum Rotation	57	64	ms	61.1	Pass
Rotation Decay to Zero	113	127	ms	118.0	Pass
Moment About Occipital Condyle	88.1	108.4	Nm	92.95	Pass
Time to Maximum Moment	47	58	ms	53.9	Pass
Moment Decay to Zero	97	107	ms	102.3	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	Denton 1716	17162019 FX	2/18/2019	2/18/2020

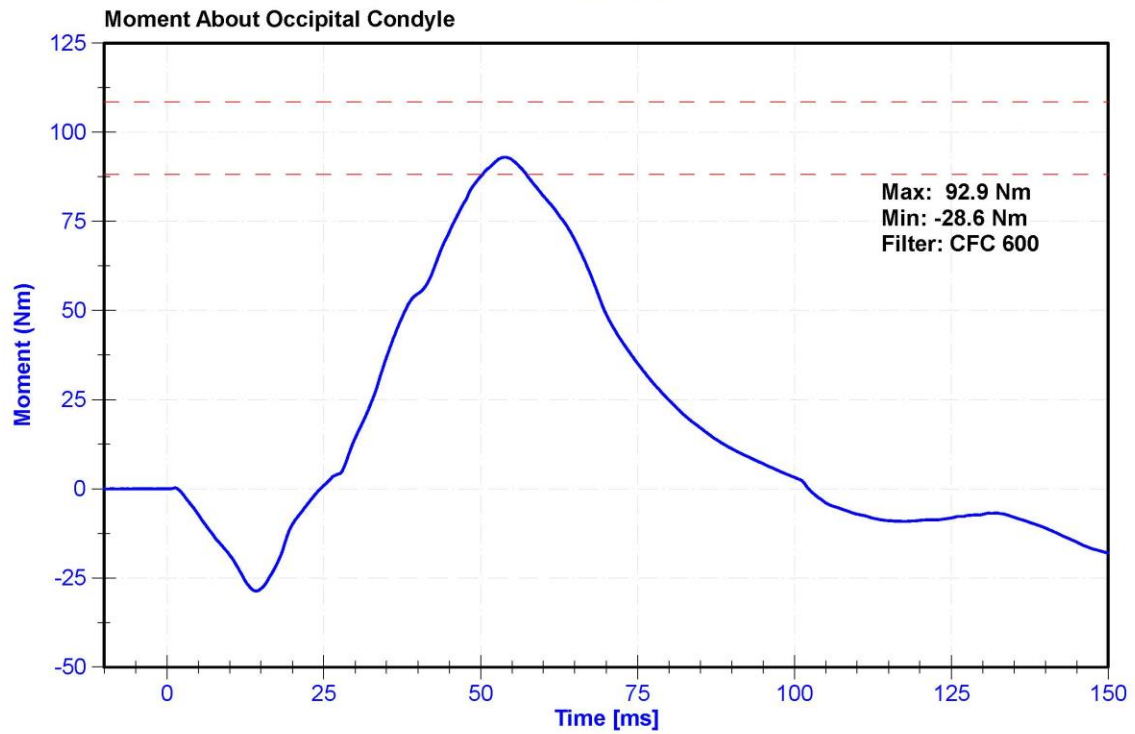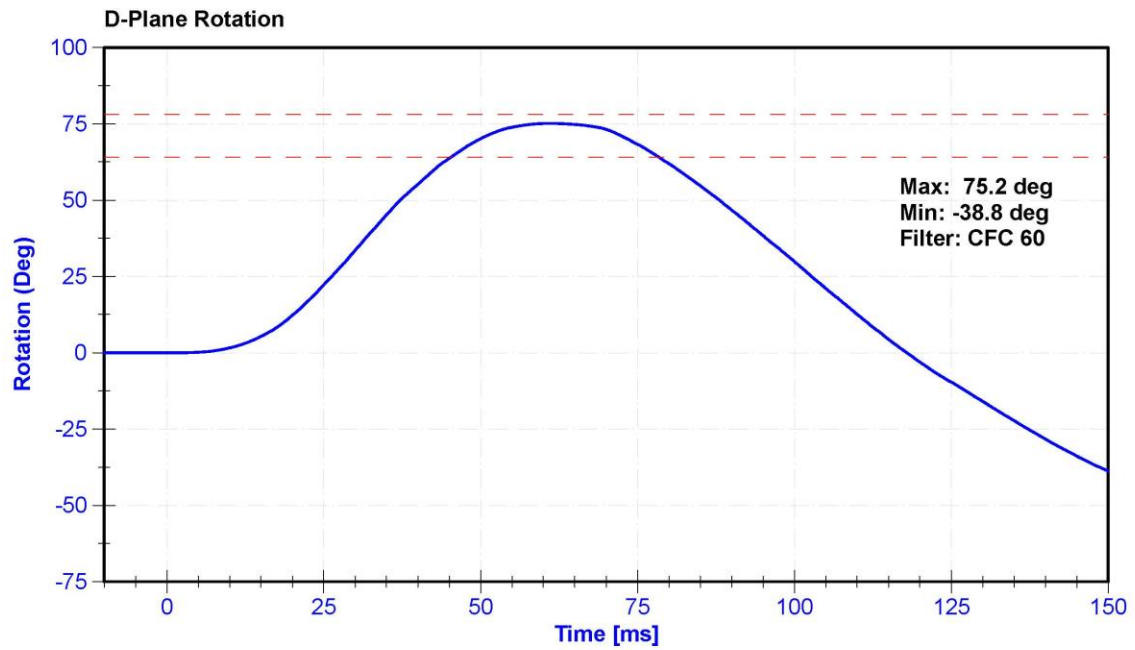

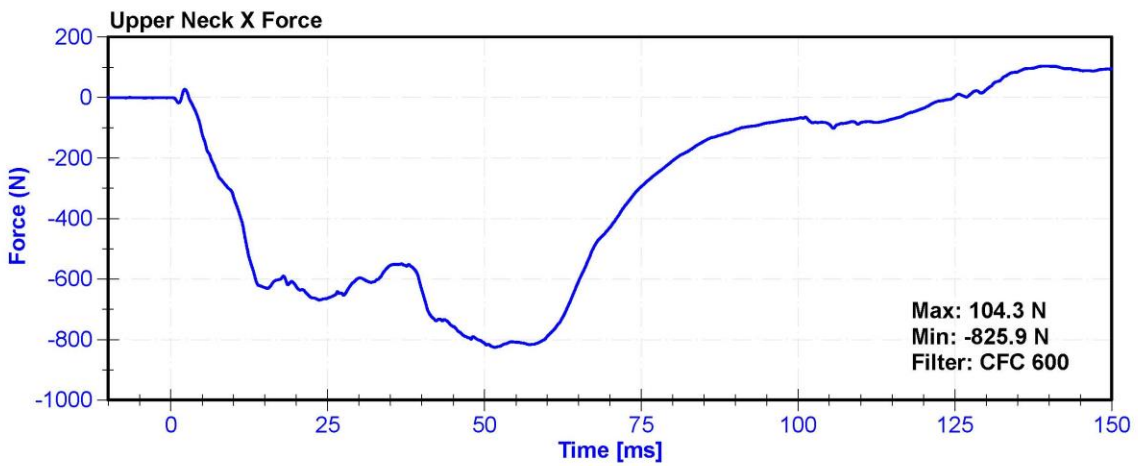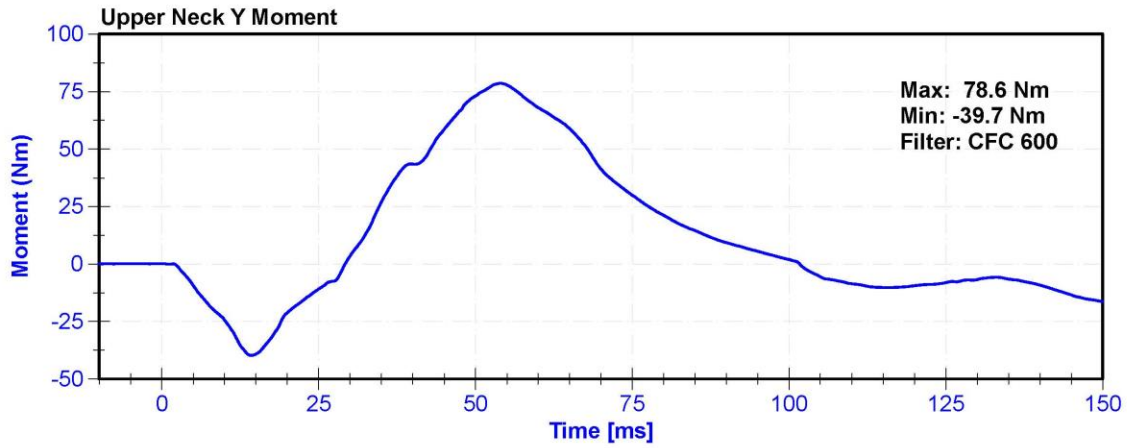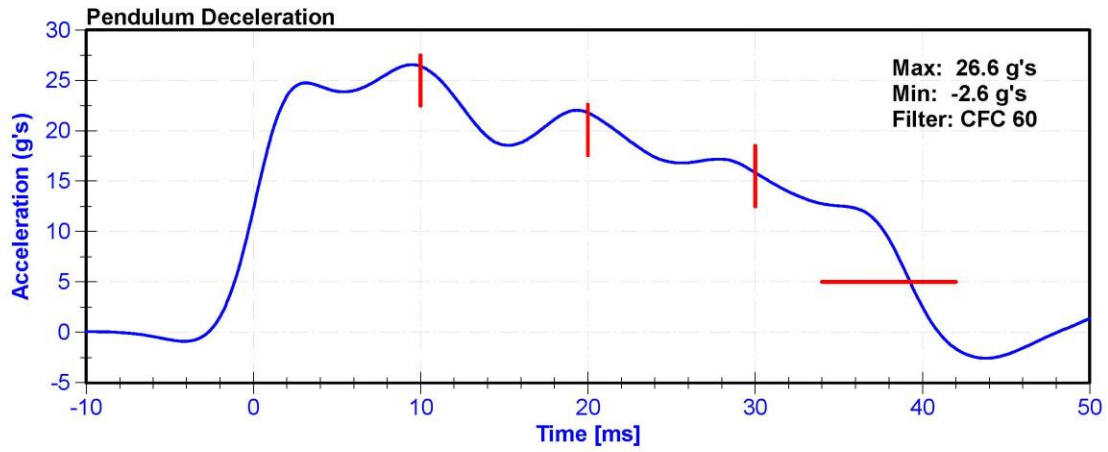



ATD Manufacturer	Humanetics	Test Technician	C. Mantell
ATD Serial Number	142	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	20.9	Pass
Humidity	10	70	%	17.8	Pass
Velocity	5.94	6.19	m/s	6.005	Pass
Pendulum Deceleration at 10ms	17.2	21.2	g's	19.08	Pass
Pendulum Deceleration at 20ms	14	19	g's	17.9	Pass
Pendulum Deceleration at 30ms	11	16	g's	14.7	Pass
Max. Pendulum Deceleration After 30ms	0	22	g's	19.3	Pass
Pendulum Deceleration Time to 5 g's	38	46	ms	43.1	Pass
Maximum D Plane Rotation	81	106	deg	96.0	Pass
Time to Maximum Rotation	72	82	ms	78.9	Pass
Rotation Decay to Zero	147	174	ms	156.3	Pass
Minimum Moment About OC	-80	-52.9	Nm	-69.20	Pass
Time to Minimum Moment	65	79	ms	72.9	Pass
Moment Decay to Zero	120	148	ms	142.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	Denton 1716	17162019 FX	2/18/2019	2/18/2020

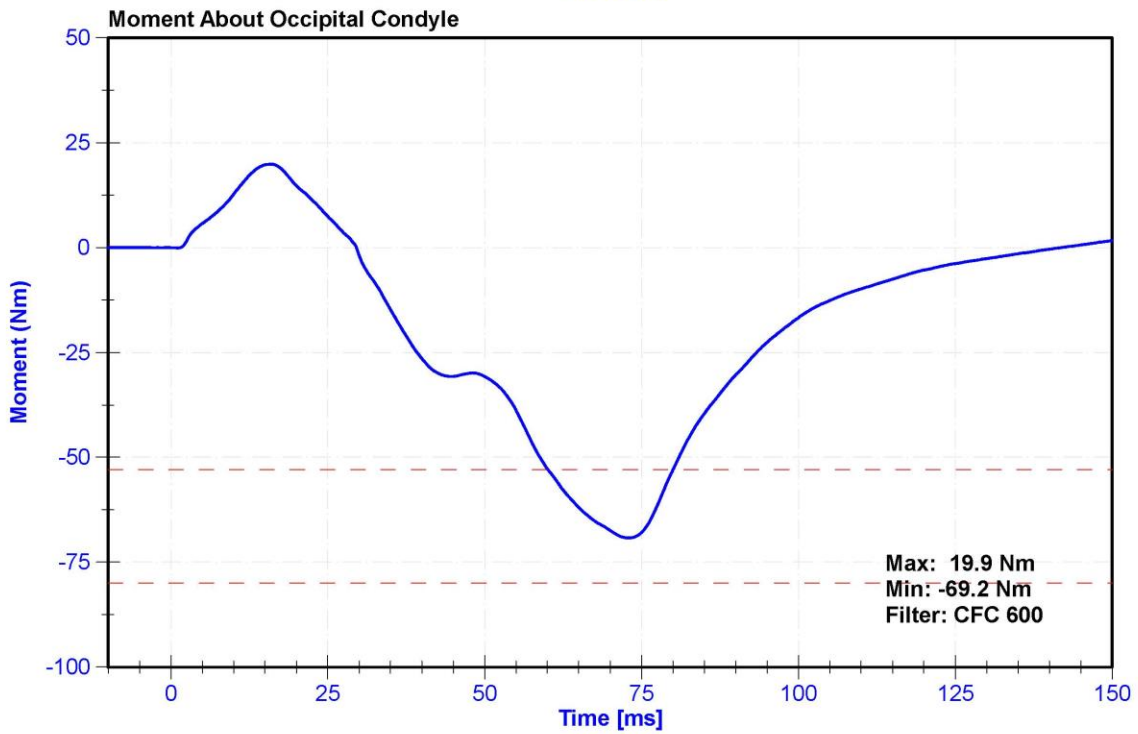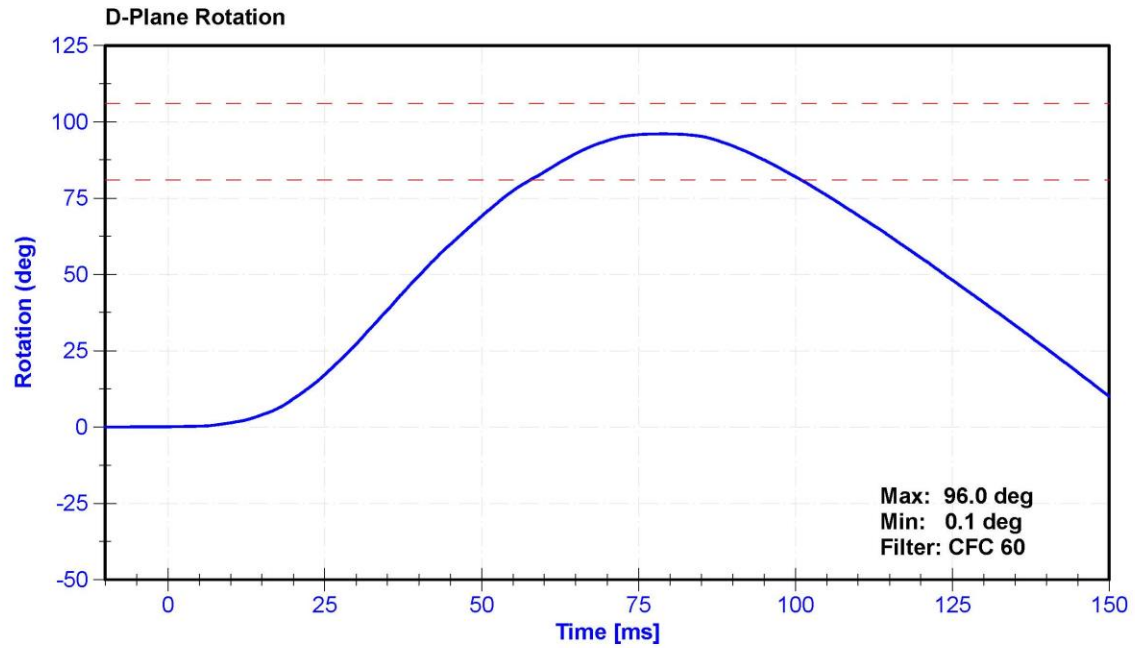

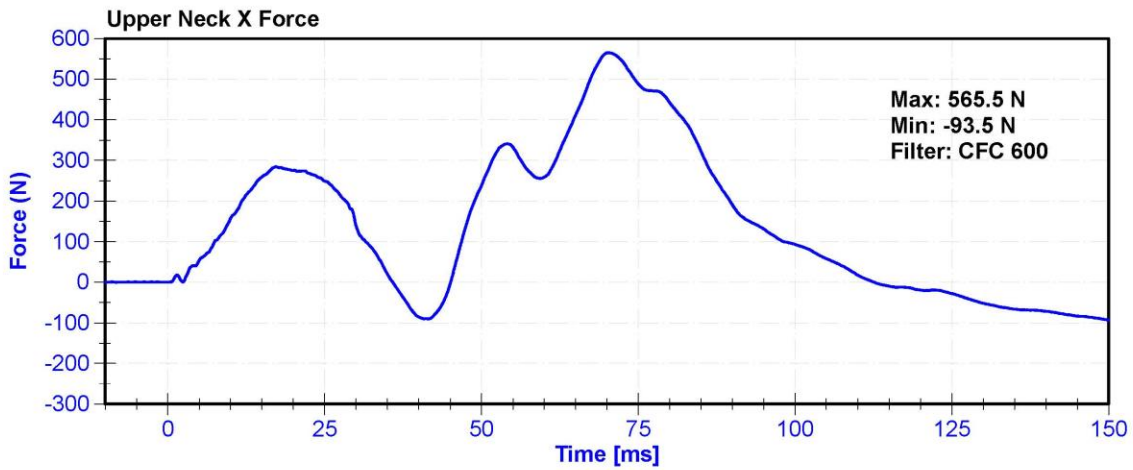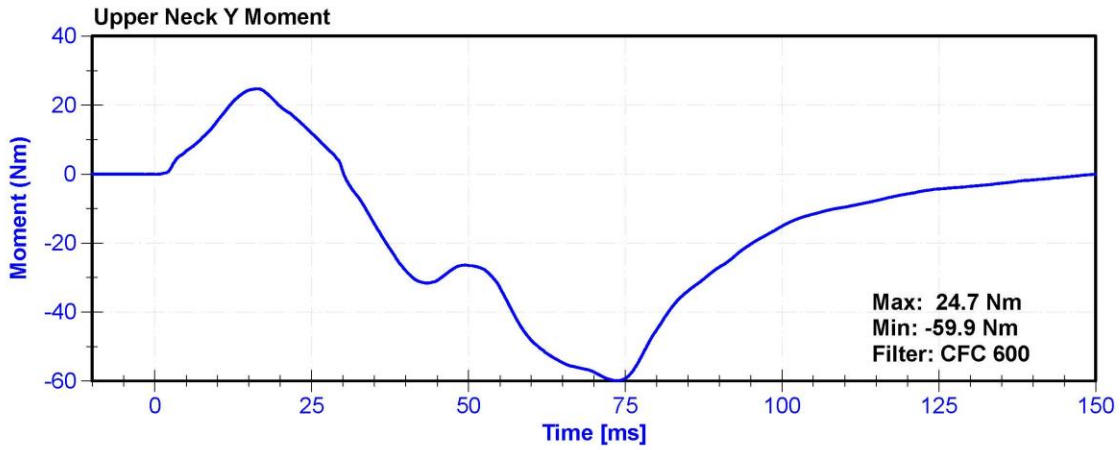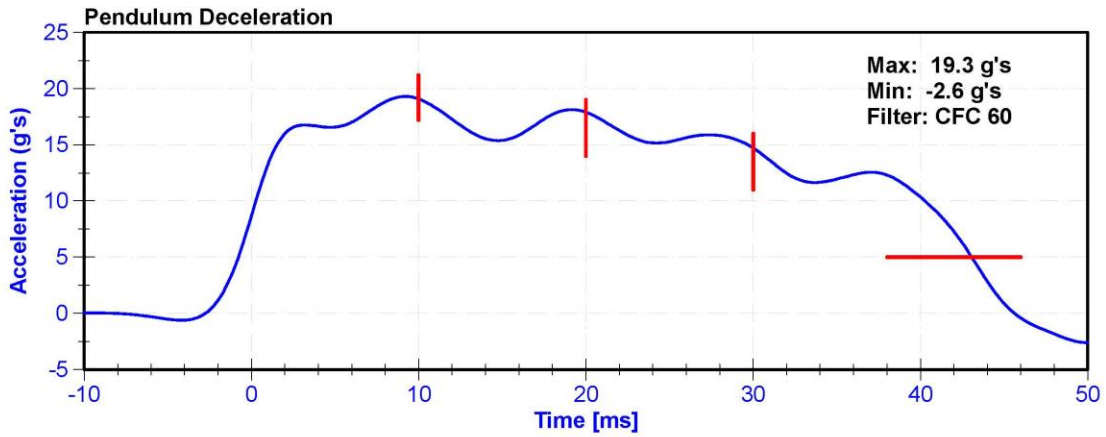


ATD Manufacturer	Humanetics	Test Technician	C. Mantell
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.2	Pass
Humidity	10	70	%	18.4	Pass
Velocity	6.59	6.83	m/s	6.819	Pass
Chest Displacement	-72.6	-63.5	mm	-64.77	Pass
Resistive Force	5160	5894	N	5863.4	Pass
Hysteresis	65	85	%	69.6	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A286228	9/27/2019	3/27/2020
Chest Potentiometer	JDK 6209-2038	DS-142	9/12/2019	9/11/2020

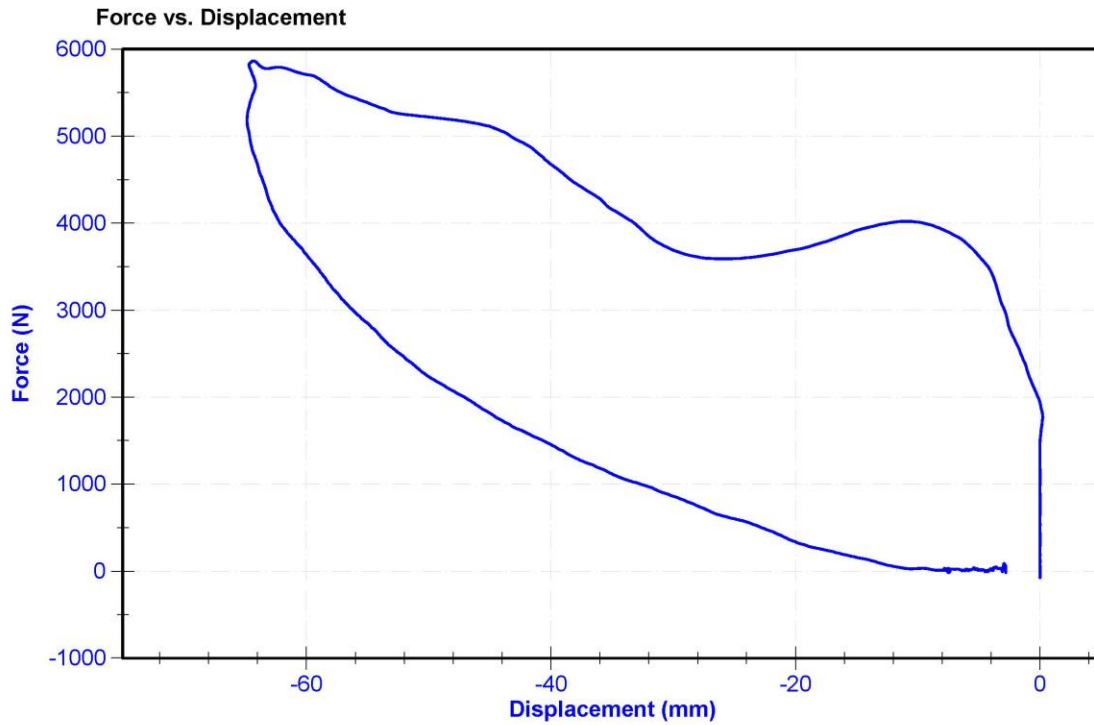

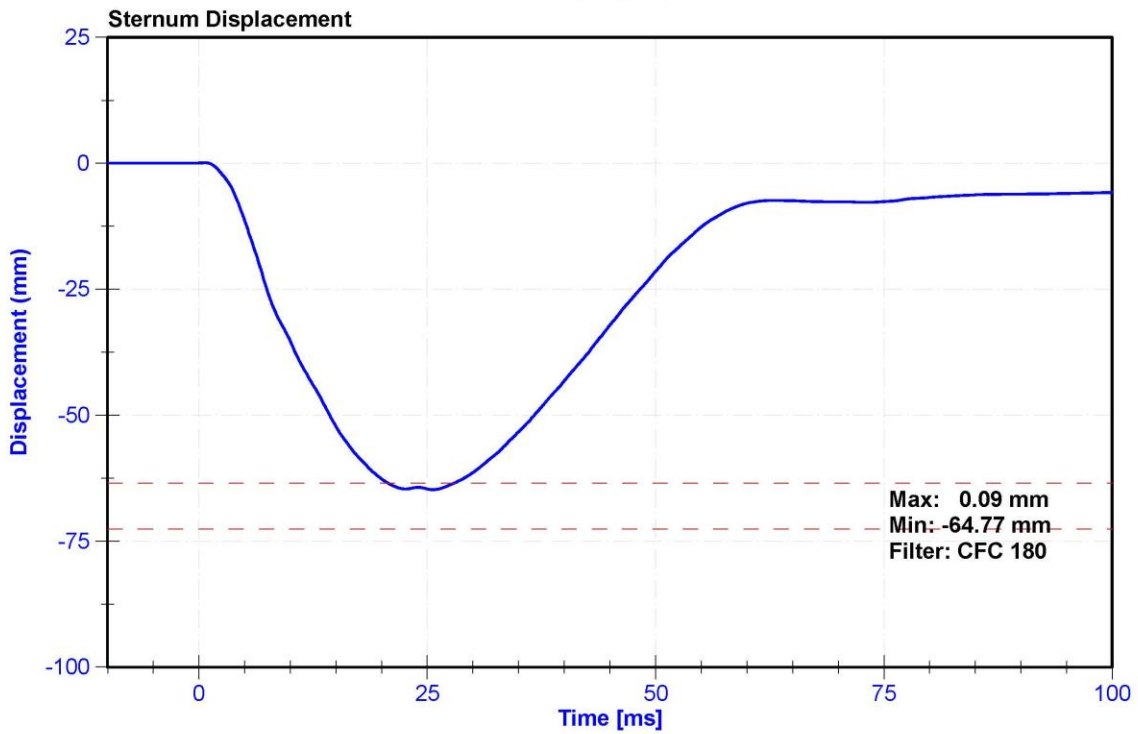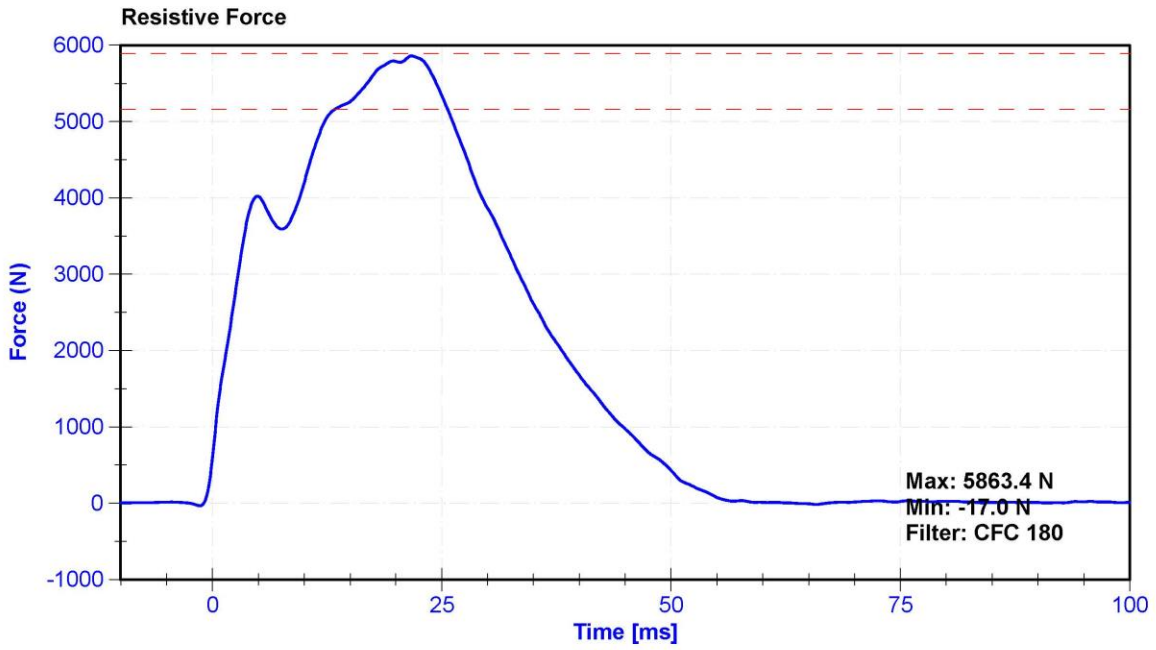

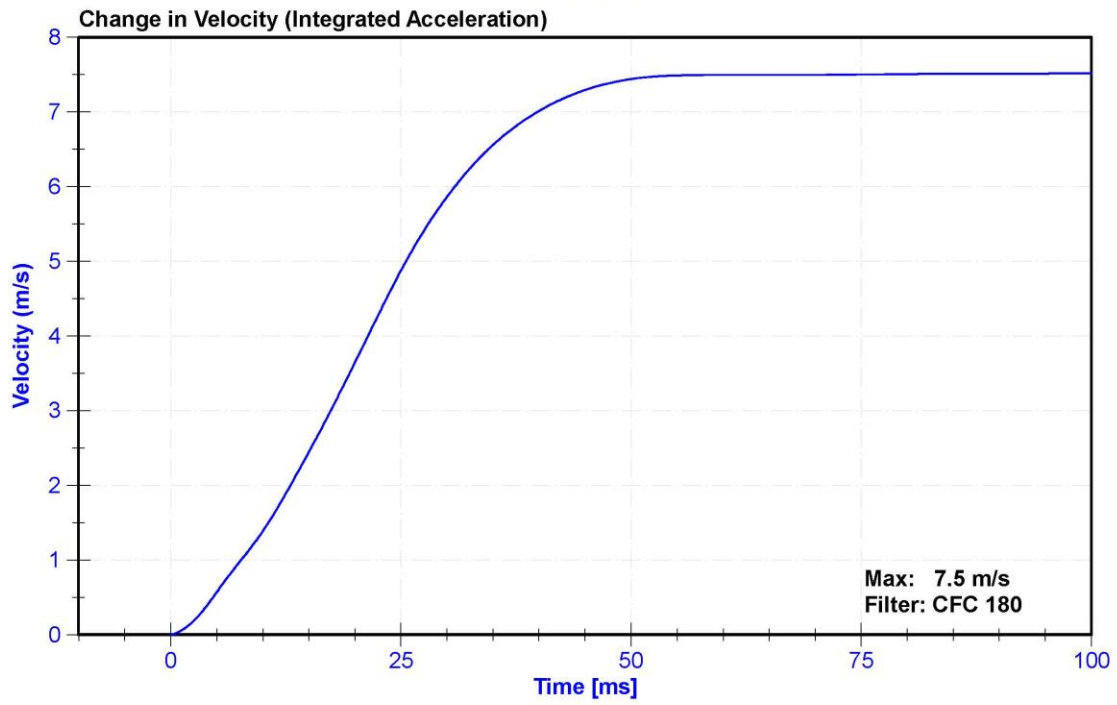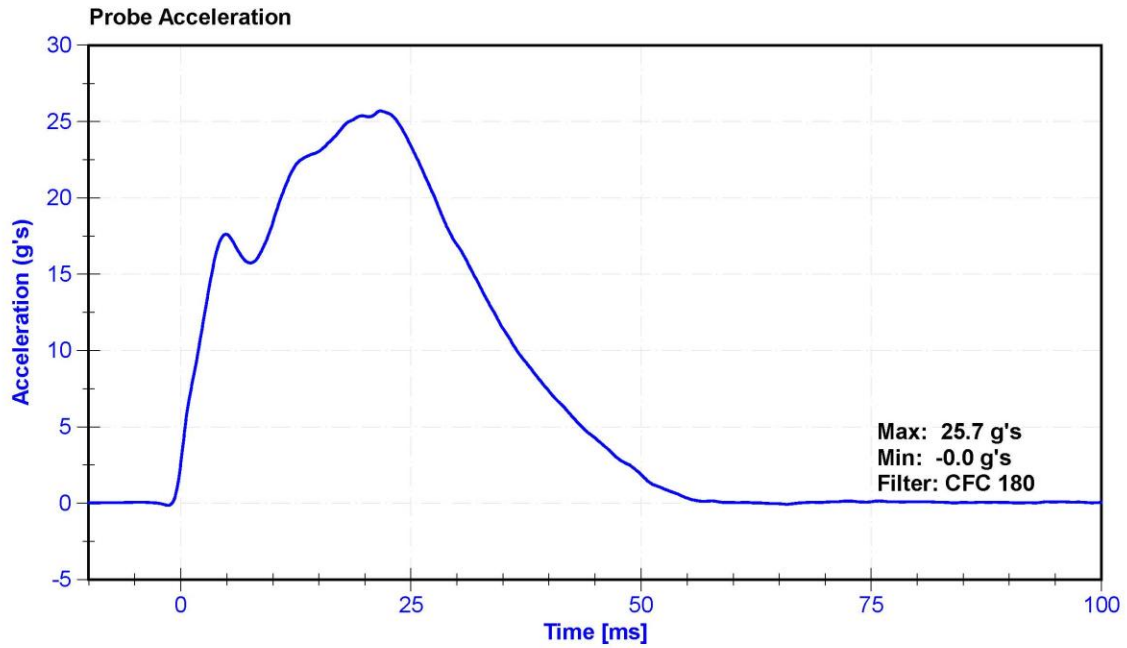


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.4	Pass
Humidity	10	70	%	19.3	Pass
Average Velocity	5	10	deg/s	7.1	Pass
Angle at 203Nm	40	50	deg	43.3	Pass
Moment at 30 degrees	0	94.9	Nm	88.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	2019-09-18	2020-09-17
Load Cell	Key Trans 2301-02	LC-115 My	2019-09-12	2020-09-11

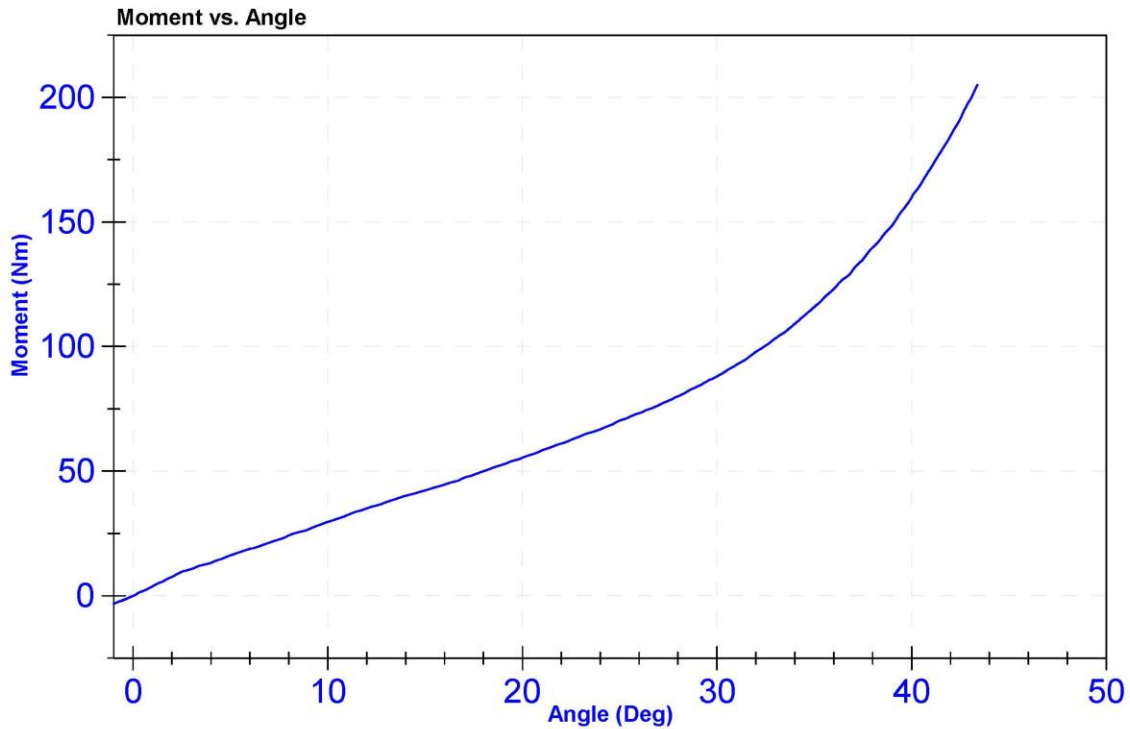


ATD Manufacturer	Humanetics	Test Technician	K. Dutton
ATD Serial Number	142	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.0	Pass
Humidity	10	70	%	19.0	Pass
Average Velocity	5	10	deg/s	7.2	Pass
Angle at 203Nm	40	50	deg	46.0	Pass
Moment at 30 degrees	0	94.9	Nm	85.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	ETI SP22	DS-0008	2019-09-18	2020-09-17
Load Cell	Key Trans 2301-02	LC-115 My	2019-09-12	2020-09-11

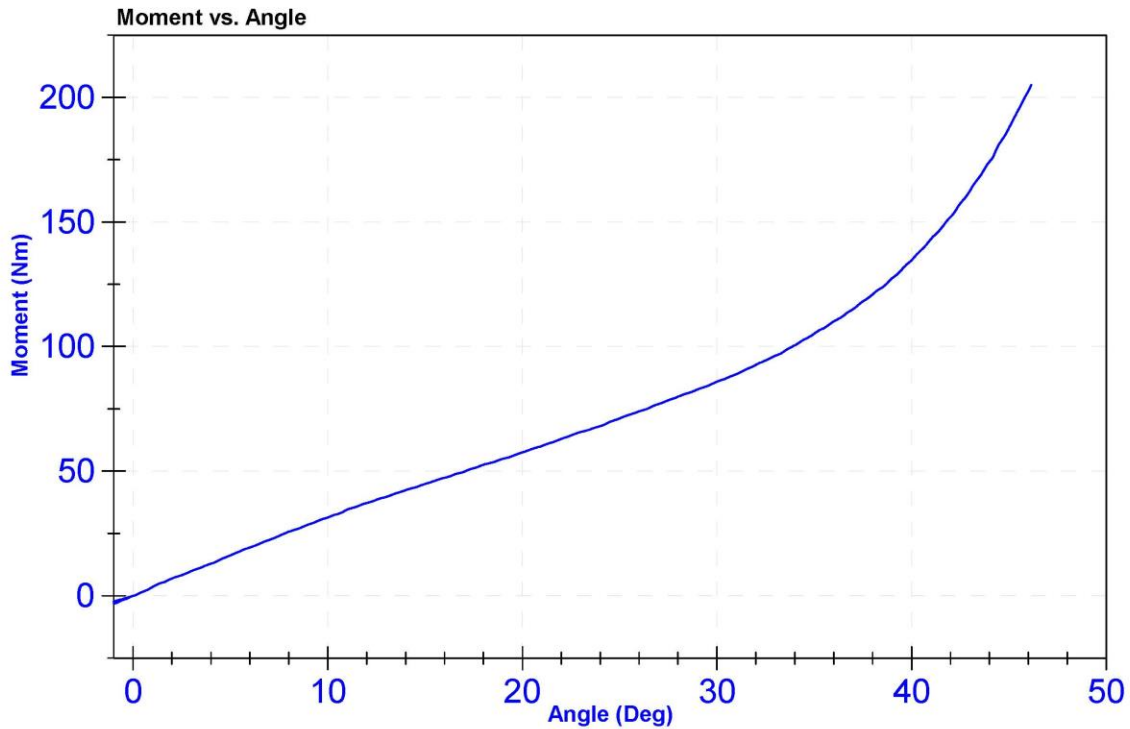


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	29.6	Pass
Velocity	2.07	2.13	m/s	2.093	Pass
Maximum Resistive Force	4720	5780	N	5709.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	Measurement Specialties	A286228	9/27/2019	9/27/2020

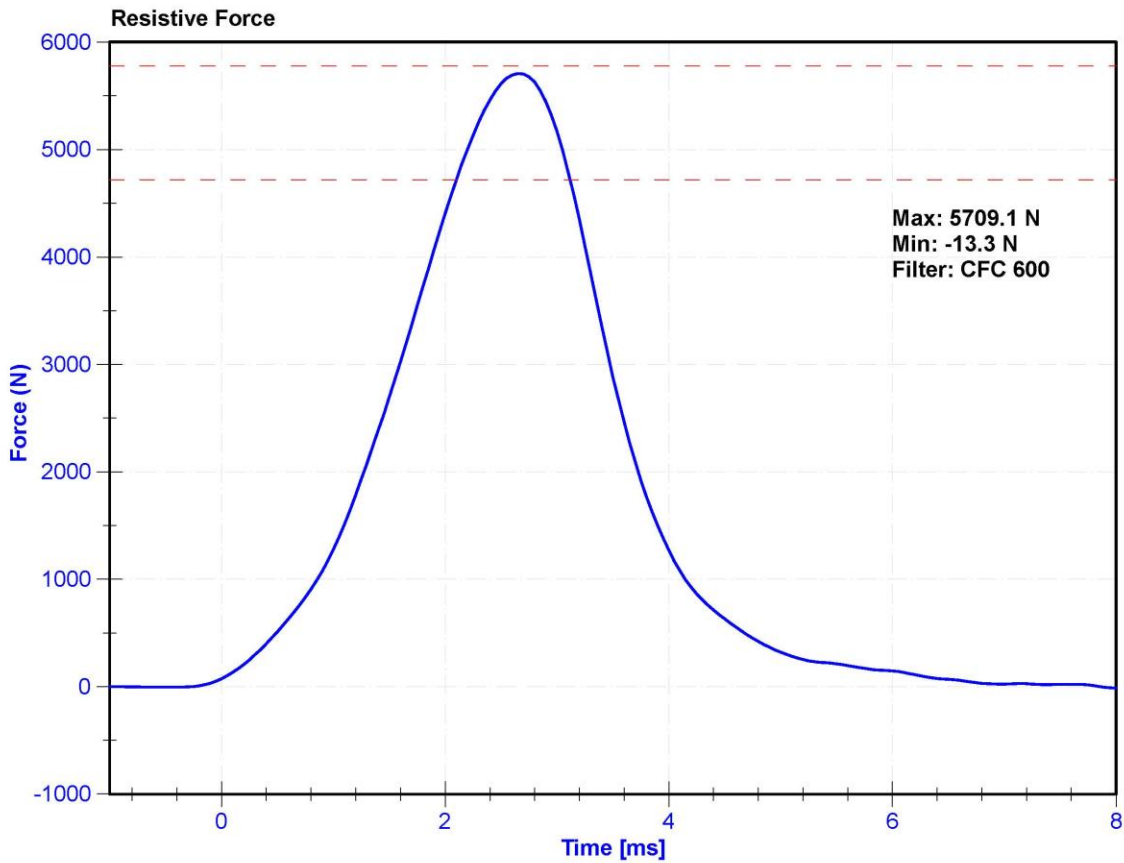

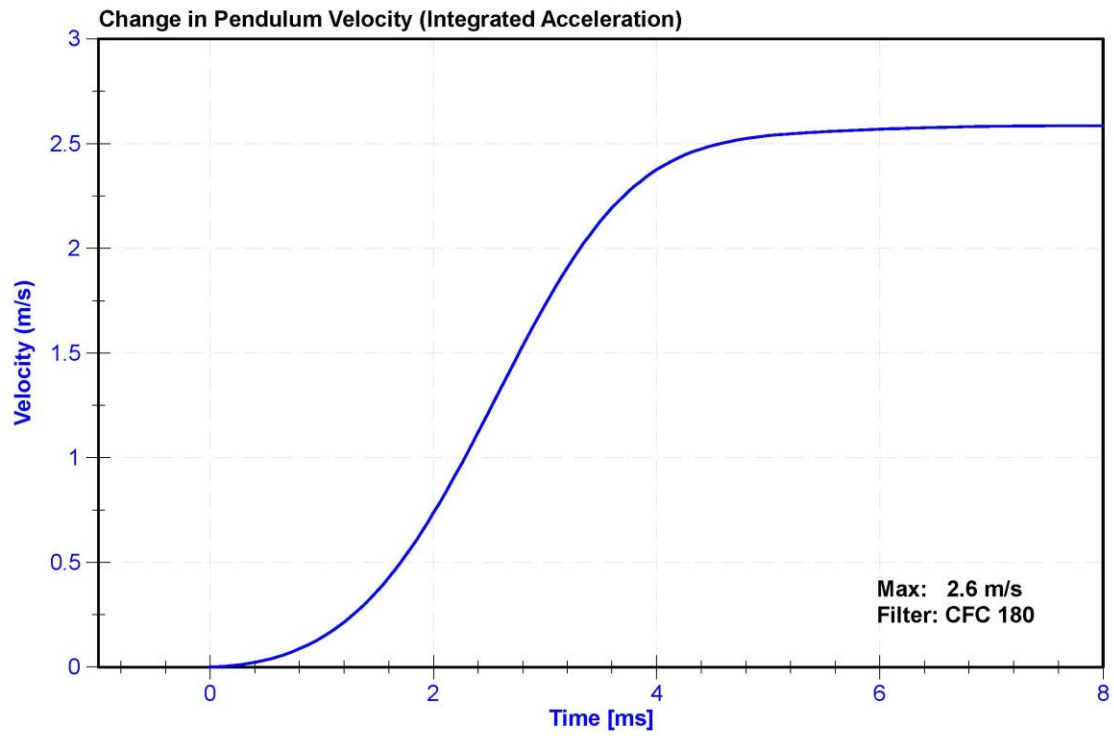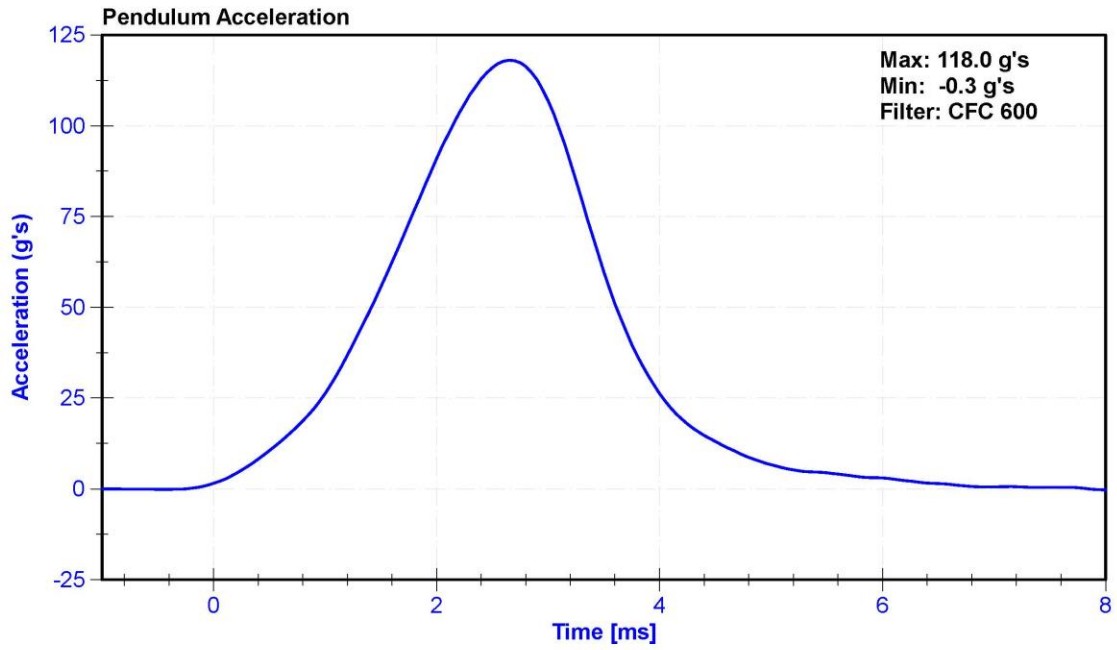


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	142	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	29.6	Pass
Velocity	2.07	2.13	m/s	2.091	Pass
Maximum Resistive Force	4720	5780	N	5492.8	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	Measurement Specialties	A286228	9/27/2019	9/17/2020

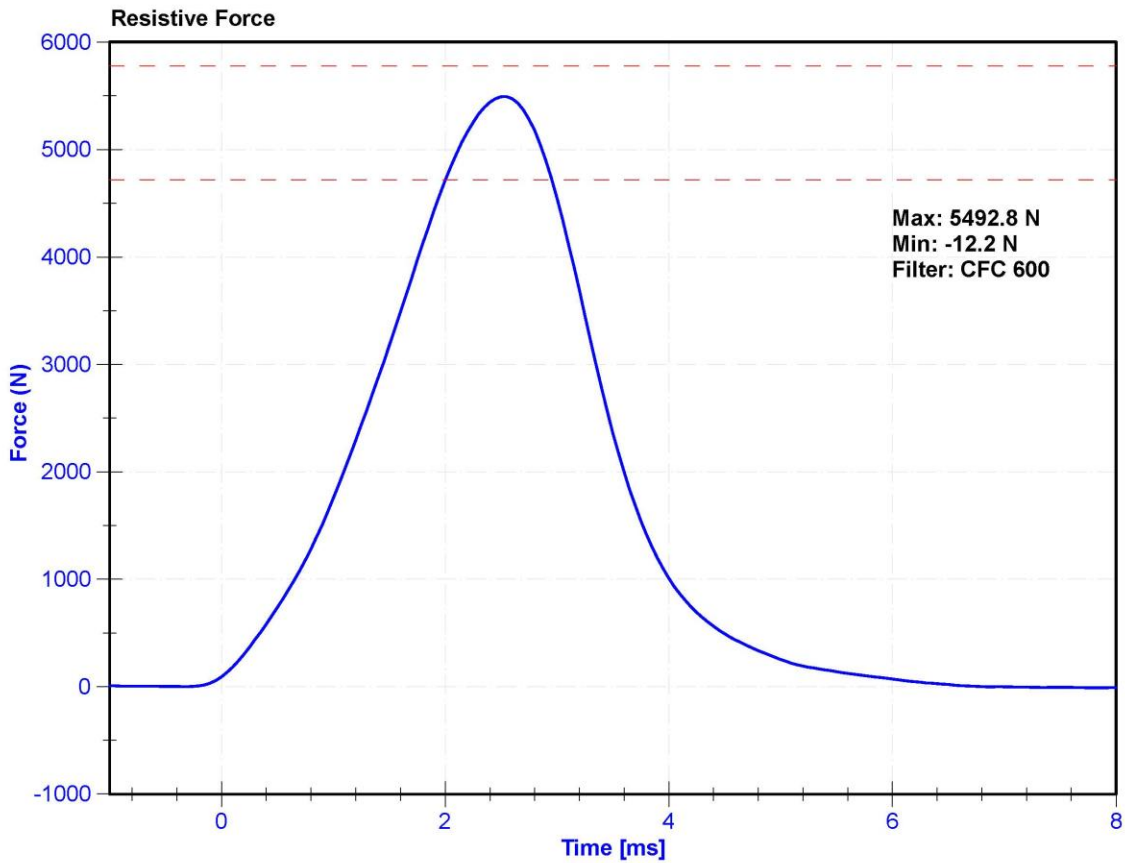

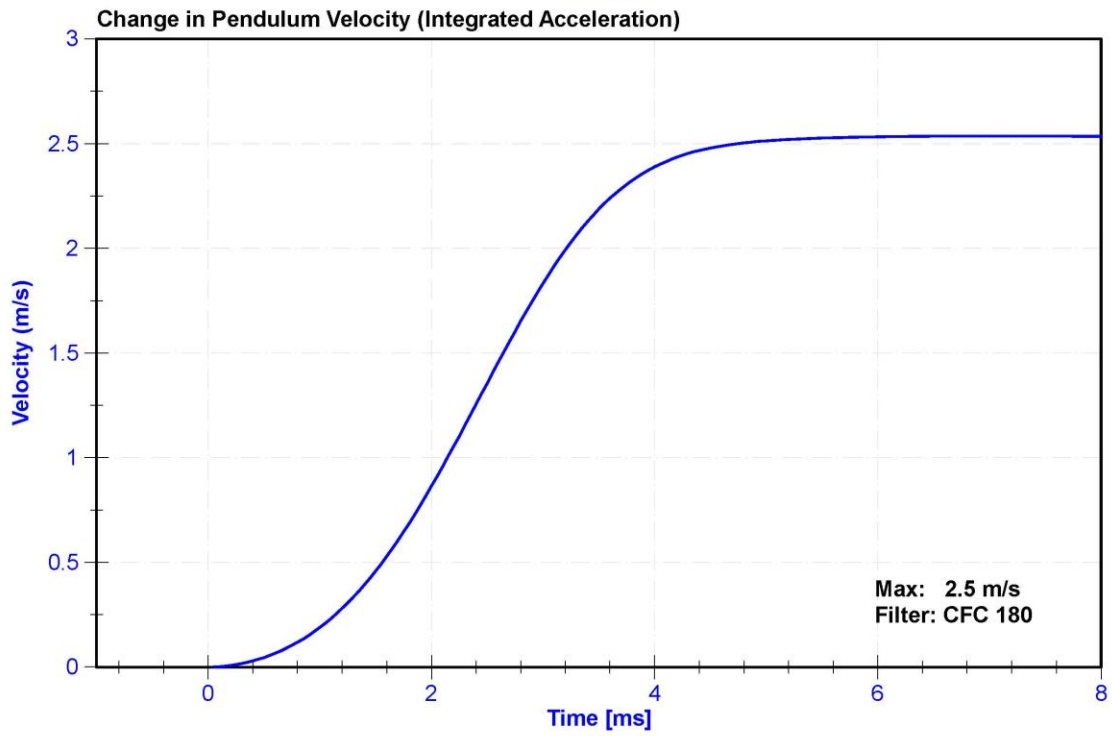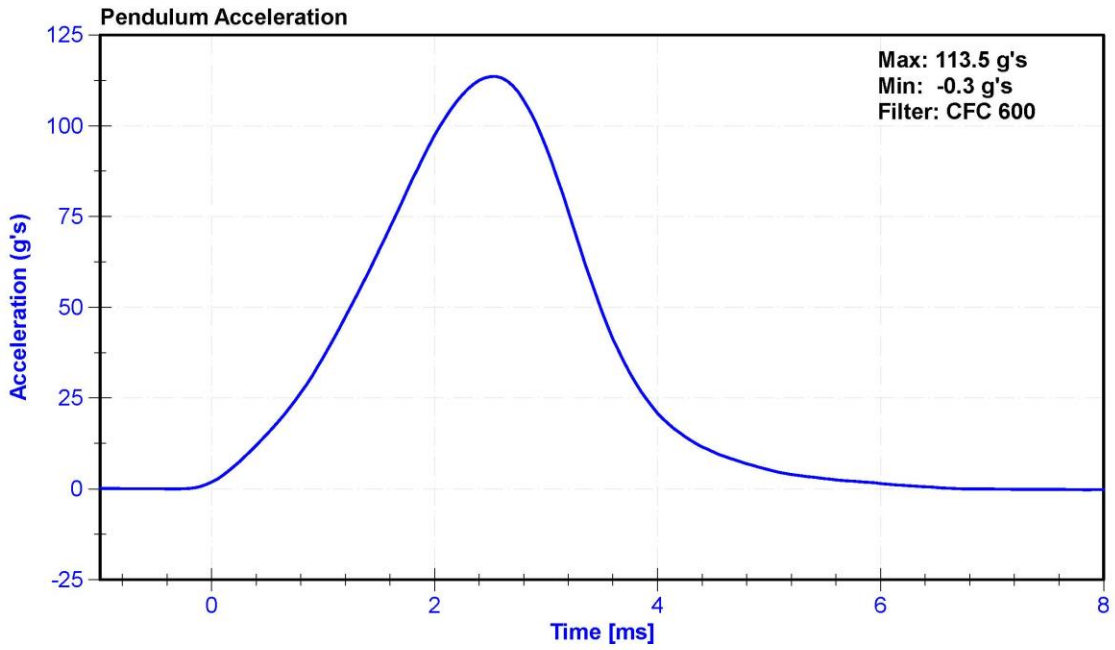

CALIBRATION TEST RESULTS

POST-TEST

HYBRID III 5TH PERCENTILE FEMALE - PASSENGER ATD

SERIAL NO: 140




External Measurements - Hybrid 3 - 5th Female

Technician: K. Brogan

Date: 1/17/2020

Dummy Serial Number: 140

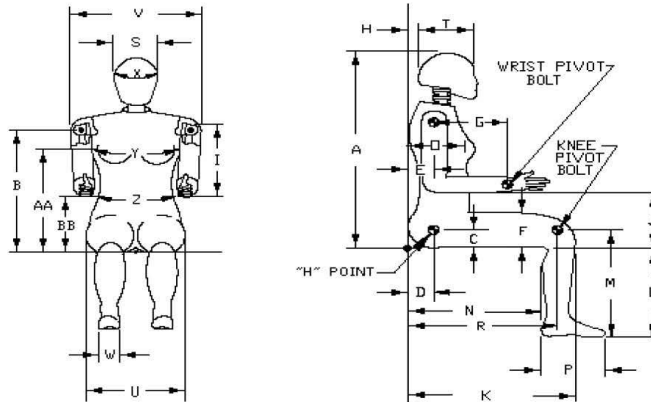

Symbol	Description	Specification (mm)		Result (mm)	Pass/Fail
A	Sitting Height	775	800	791	Pass
B	Shoulder Pivot Height	432	457	442	Pass
C	H-Point Height	81	86	83	Pass
D	H-Point from Backline	145	150	146	Pass
E	Shoulder Pivot from Backline	69	84	75	Pass
F	Thigh Clearance	119	135	126	Pass
G	Back of Elbow to Wrist Pivot	244	259	251	Pass
H	Head Back to Backline	43	48	45	Pass
I	Shoulder to Elbow Length	277	297	290	Pass
J	Elbow Rest Height	183	203	194	Pass
K	Buttock to Knee Length	521	546	537	Pass
L	Popliteal Height	356	376	366	Pass
M	Knee Pivot Height	394	419	409	Pass
N	Buttock Popliteal Length	414	439	428	Pass
O	Chest Depth without Jacket	175	191	182	Pass
P	Foot Length (right)	219	234	229	Pass
R	Buttock To Knee Pivot Length	457	483	467	Pass
S	Head Breadth	137	147	142	Pass
T	Head Depth	178	188	180	Pass
U	Hip Breadth	300	315	313	Pass
V	Shoulder Breadth	351	366	361	Pass
W	Foot Breadth	79	94	83	Pass
X	Head Circumference	528	549	540	Pass
Y	Chest Circumference with Jacket	851	881	874	Pass
Z	Waist Circumference	460	790	624	Pass
AA	Reference Location (Chest Circumference)	333	358	345	Pass
BB	Reference Location (Waist Circumference)	160	170	165	Pass


ATD Manufacturer	Humanetics	Test Technician	M. Dudek
ATD Serial Number	140	Laboratory Supervisor	K. Brogan




Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.3	Pass
Humidity	10	70	%	43.6	Pass
Resultant Acceleration	250	300	g's	260.8	Pass
Oscillation	0	10	%	2.3	Pass
Lateral Acceleration	-15	15	g's	4.4	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
X Accelerometer	ENDEVCO 7264CT	AC-P58998	9/30/2019	3/30/2020
Y Accelerometer	ENDEVCO 7264CT	AC-P51722	10/1/2019	3/31/2020
Z Accelerometer	ENDEVCO 7264CT	AC-P58997	9/30/2019	3/30/2020

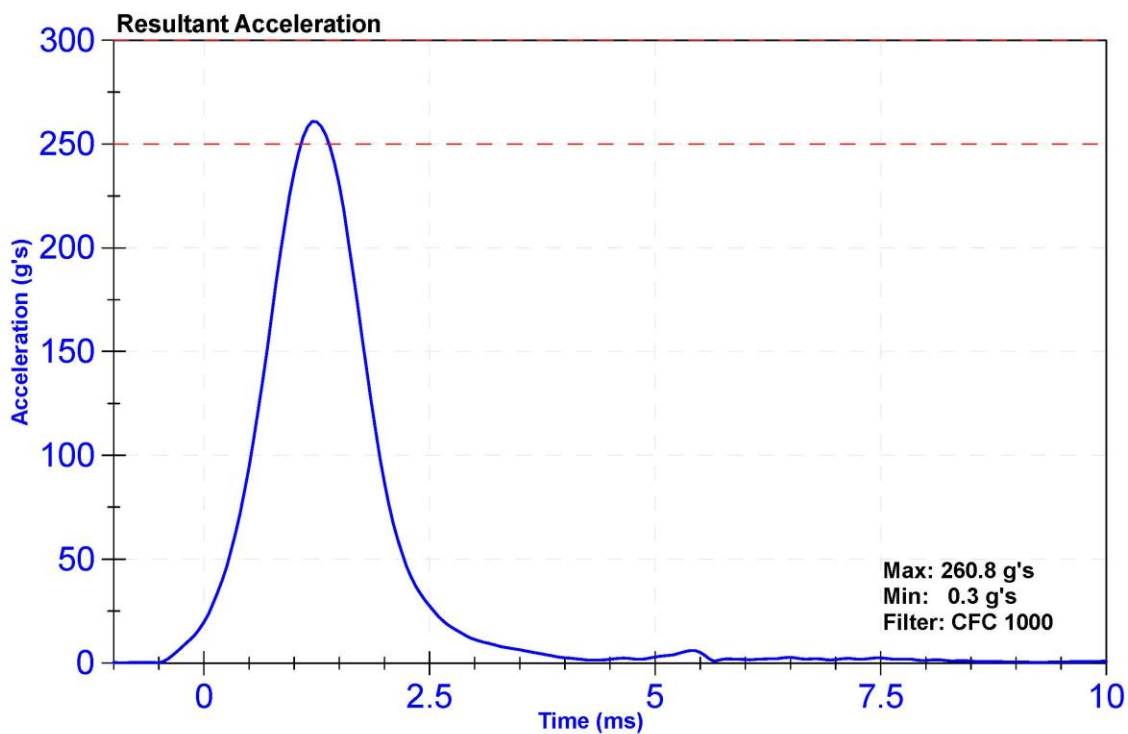

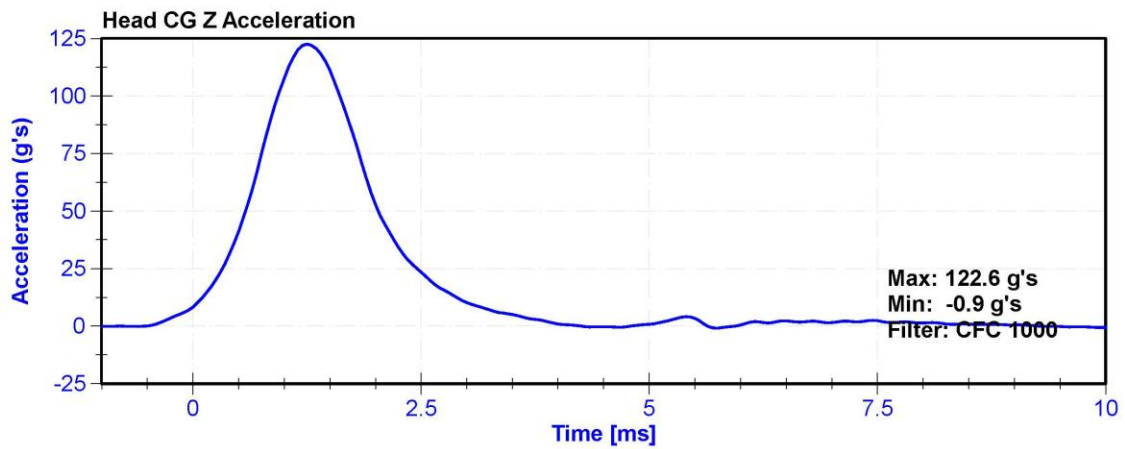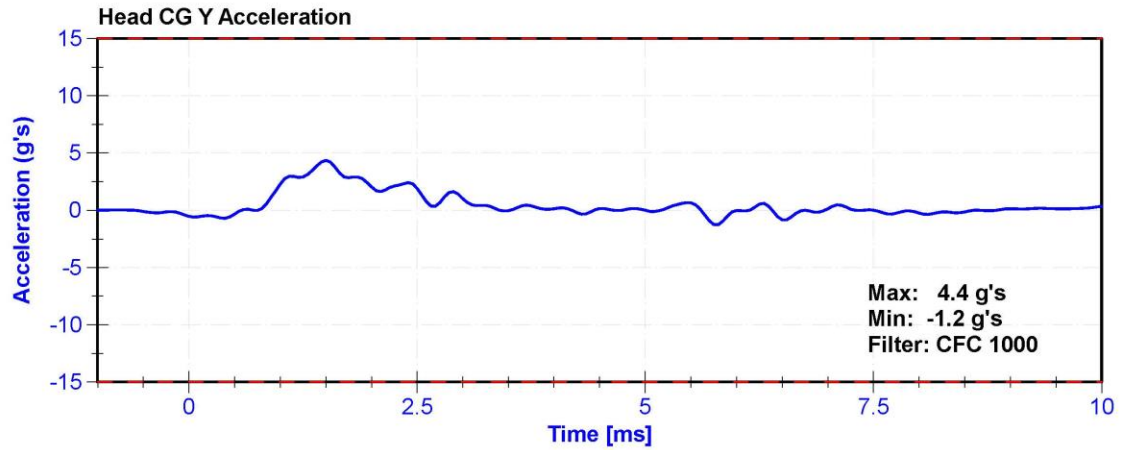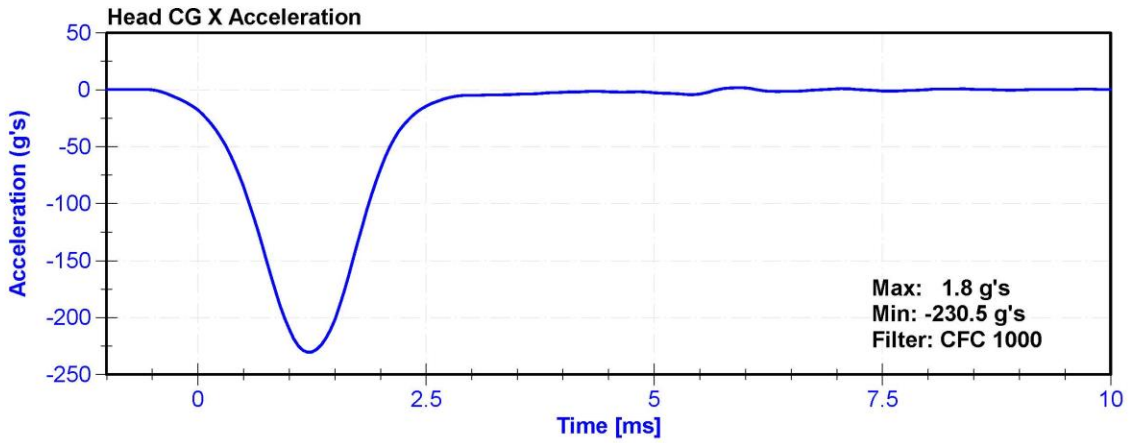


ATD Manufacturer	Humanetics	Test Technician	C. Mantell
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



Results




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.2	Pass
Humidity	10	70	%	17.2	Pass
Velocity	6.89	7.13	m/s	7.013	Pass
Pendulum Impulse at 10ms	2.1	2.5	m/s	2.27	Pass
Pendulum Impulse at 20ms	4.0	5.0	m/s	4.48	Pass
Pendulum Impulse at 30ms	5.8	7.0	m/s	6.39	Pass
Max D Plane Rotation	77	91	deg	86.9	Pass
Max Moment During Rotation Interval	69	83	Nm	74.9	Pass
Moment Decay to 10.0 Nm	80	100	ms	90.3	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	DENTON 1716A	LC-2206Fx	2/18/2019	2/18/2020

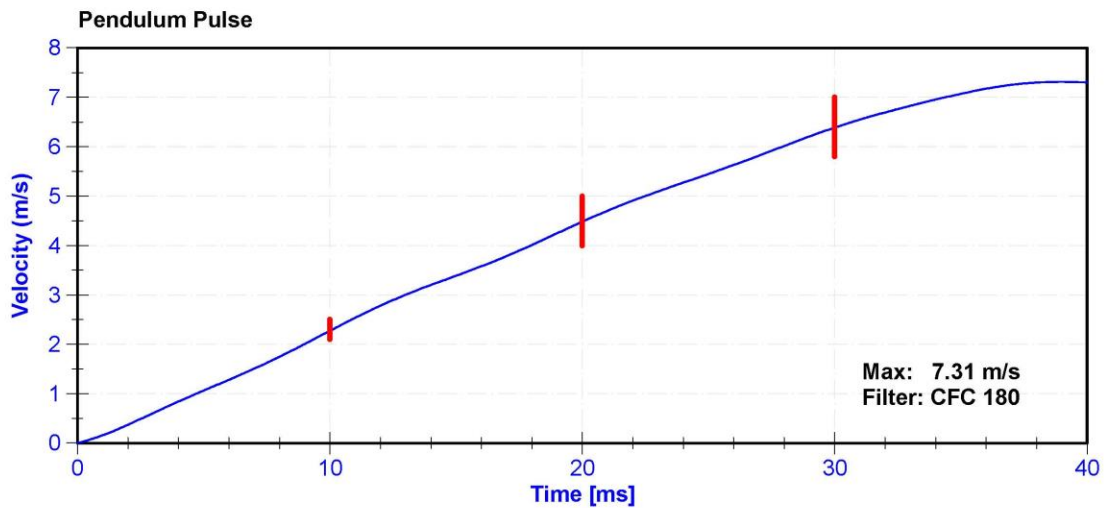

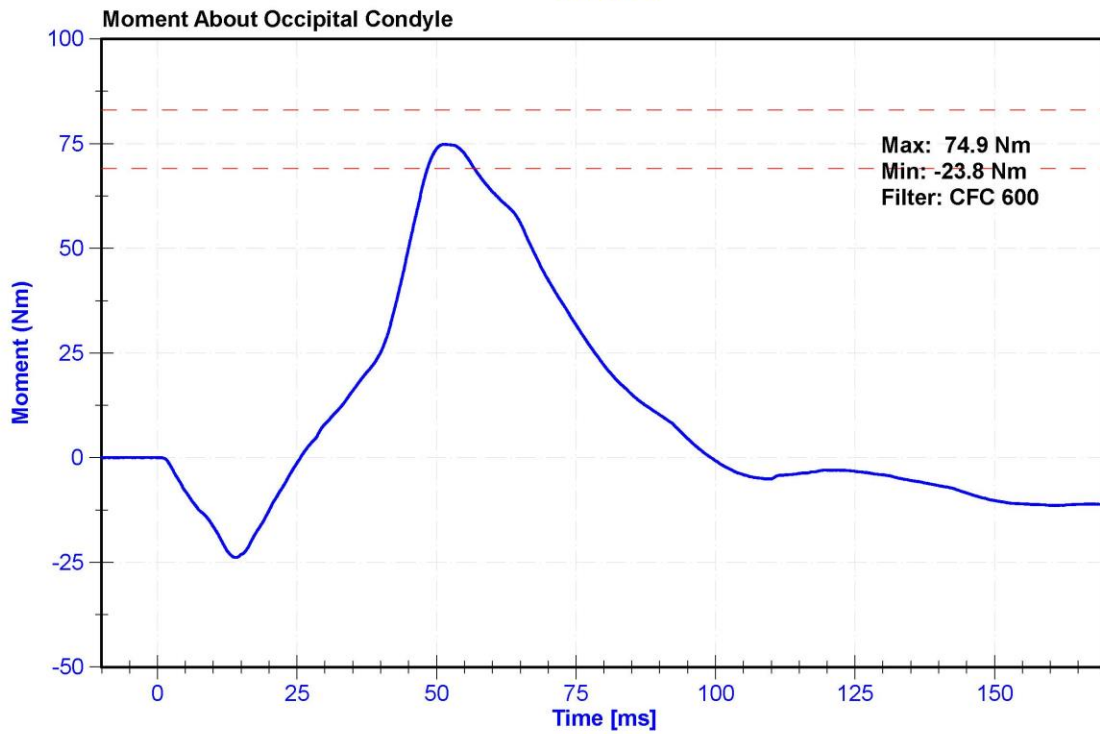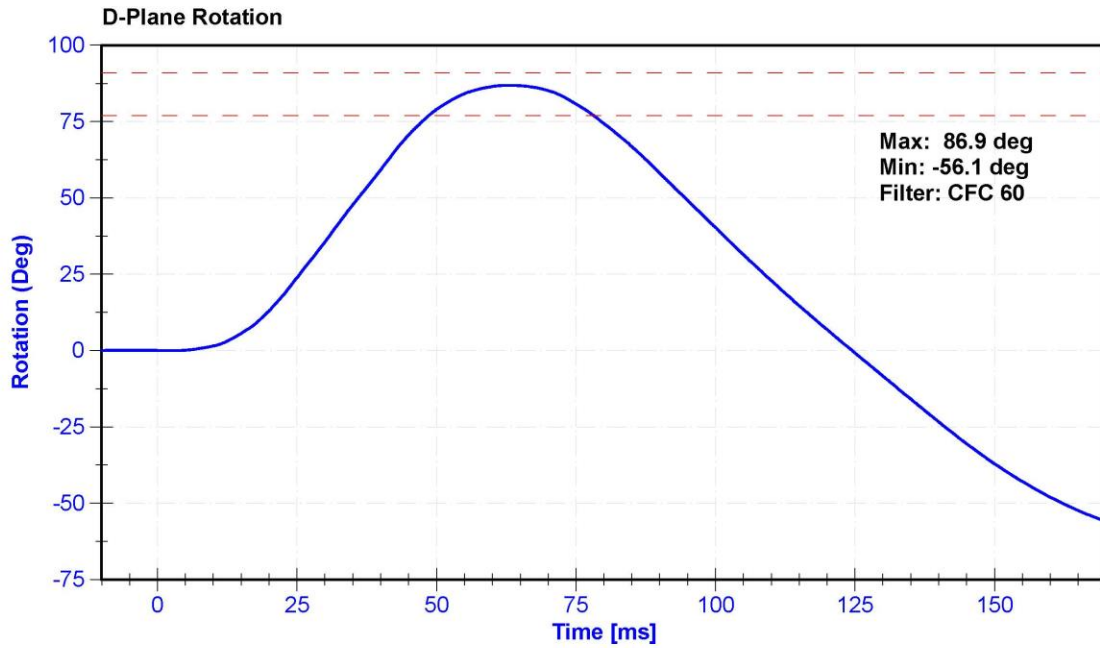

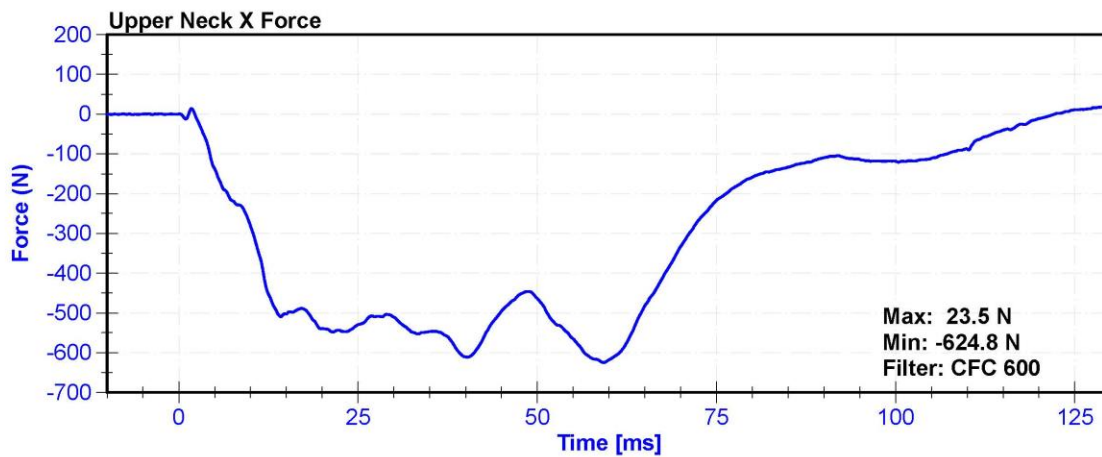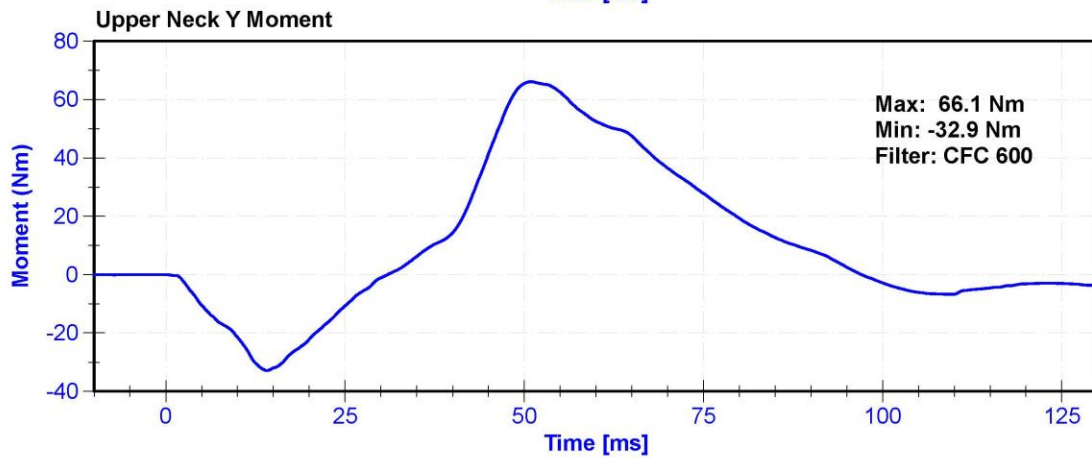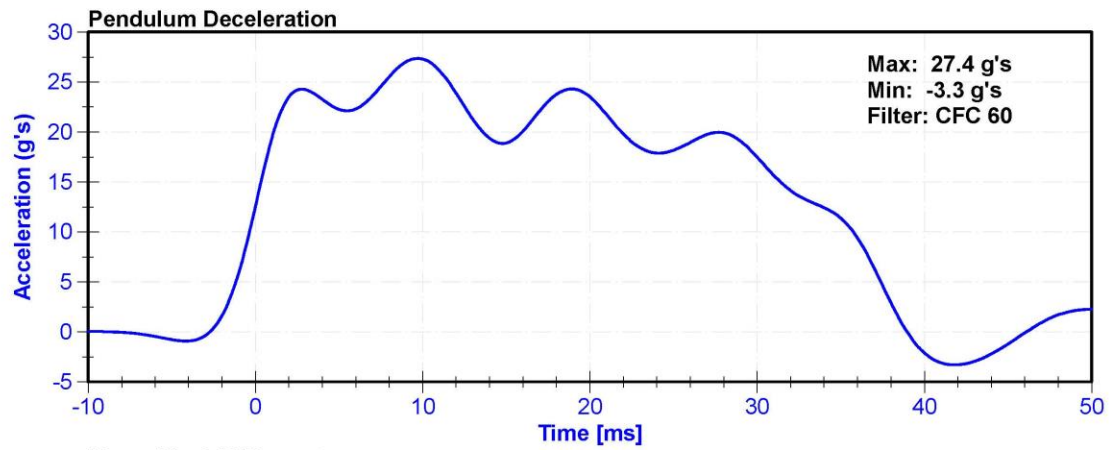


ATD Manufacturer	Humanetics	Test Technician	C. Mantell
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



Results




Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.3	Pass
Humidity	10	70	%	18.2	Pass
Velocity	5.95	6.19	m/s	6.046	Pass
Pendulum Impulse at 10ms	1.5	1.9	m/s	1.61	Pass
Pendulum Impulse at 20ms	3.1	3.9	m/s	3.31	Pass
Pendulum Impulse at 30ms	4.6	5.6	m/s	4.87	Pass
D Plane Rotation	99	114	deg	111.5	Pass
Moment During Rotation Interval	-65	-53	Nm	-55.5	Pass
Moment Decay to -10Nm	94	114	ms	107.1	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	ENDEVCO 7231CT	AC-AH5M9 Pend	1/29/2019	1/29/2020
Pendulum Potentiometer	ETI SP22G	DS-LABPOT1	9/13/2019	9/12/2020
Condyle Potentiometer	ETI SP22G	DS-LABPOT2	9/13/2019	9/12/2020
Upper Neck Load Cell	DENTON 1716A	LC-2206Fx	2/18/2019	2/18/2020

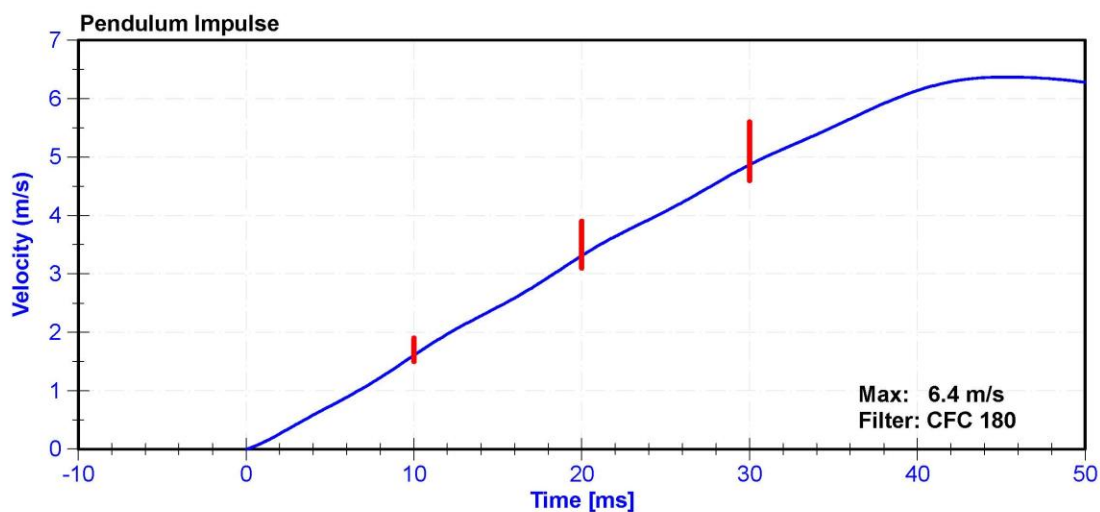

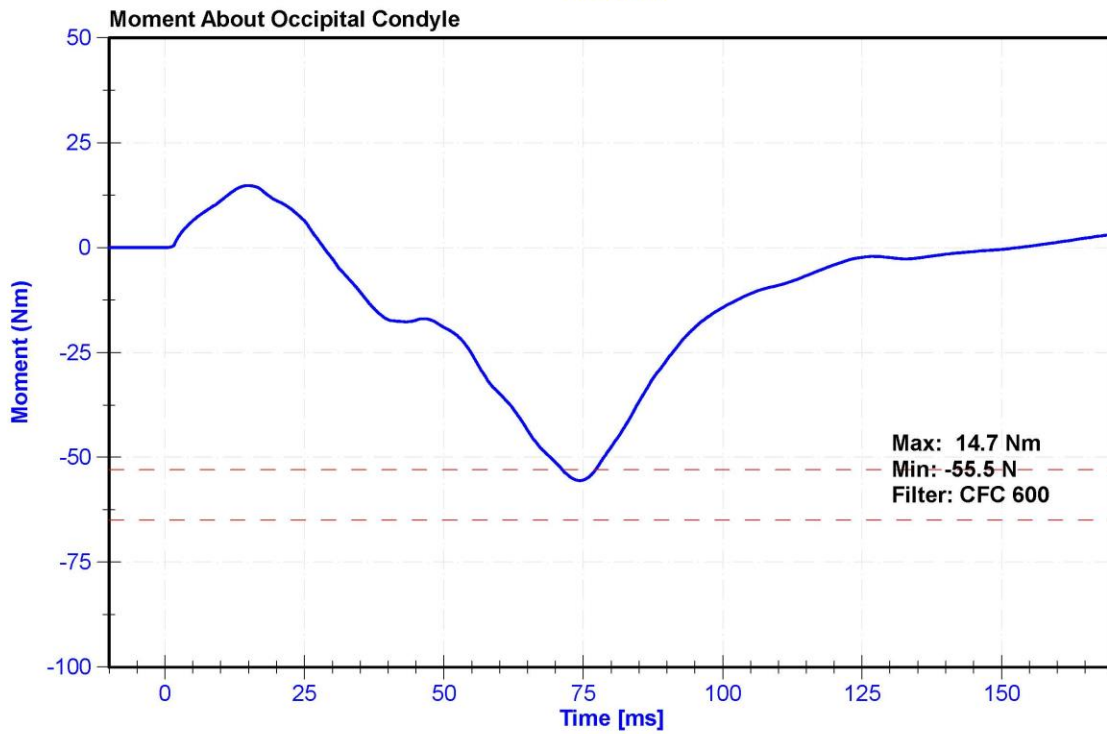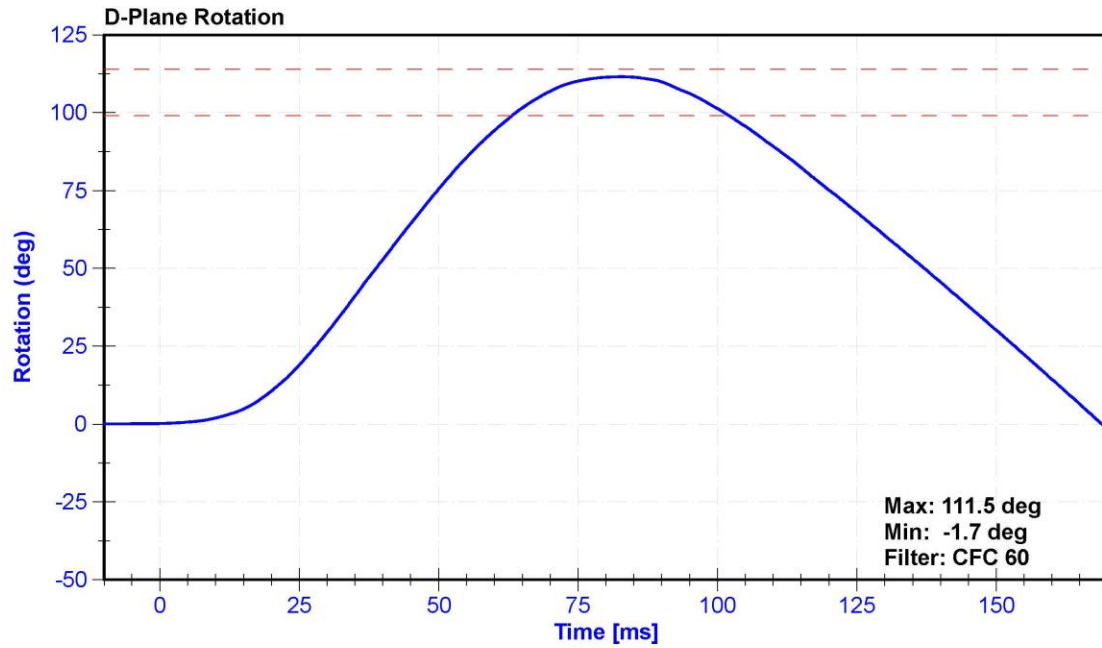

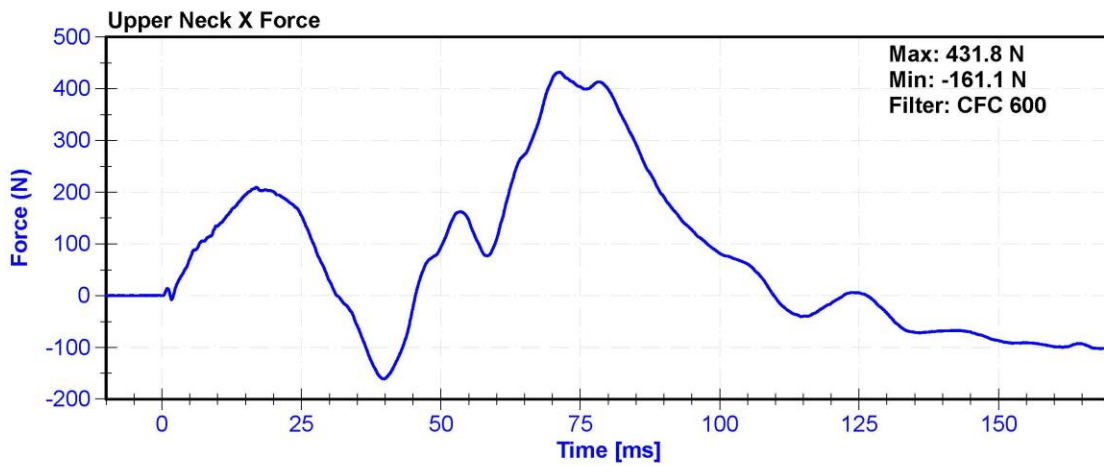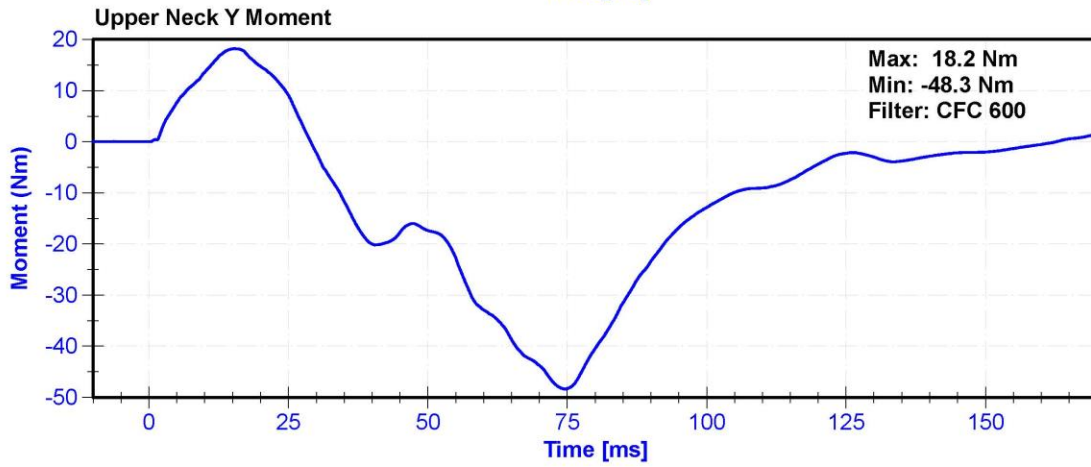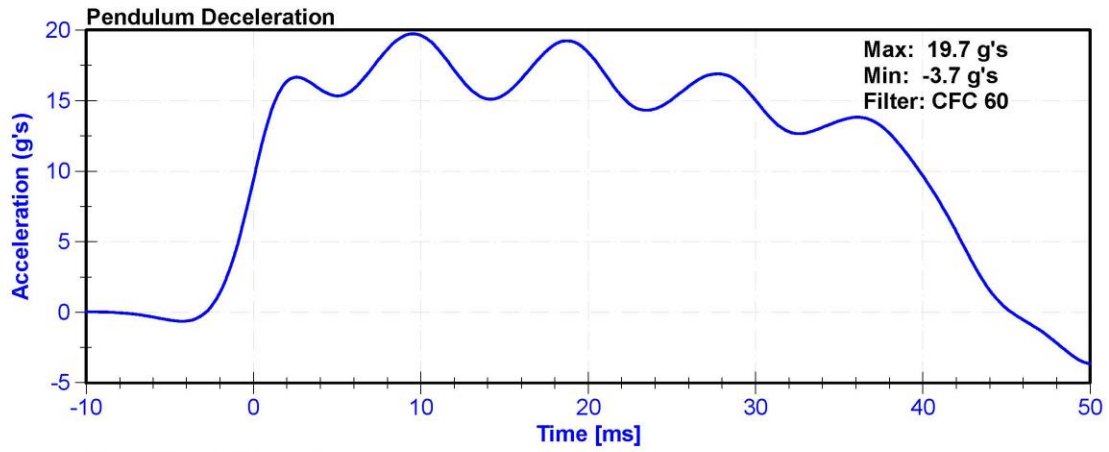


ATD Manufacturer	Humanetics	Test Technician	C. Mantel
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



Results



Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	20.6	22.2	°C	21.3	Pass
Humidity	10	70	%	22.3	Pass
Velocity	6.59	6.83	m/s	6.641	Pass
Chest Deflection	-58	-50	mm	-51.3	Pass
Maximum Resistive Force (50 to 58mm)	3900	4400	N	4265.0	Pass
Maximum Resistive Force (18 to 50mm)	0	4600	N	4308.0	Pass
Hysteresis	69	85	%	74.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	MSI 64C-2000	A286228	9/27/2019	3/27/2020
Chest Potentiometer	SERVO 14CBI-3615	DS-140GFE	6/21/2019	6/20/2020

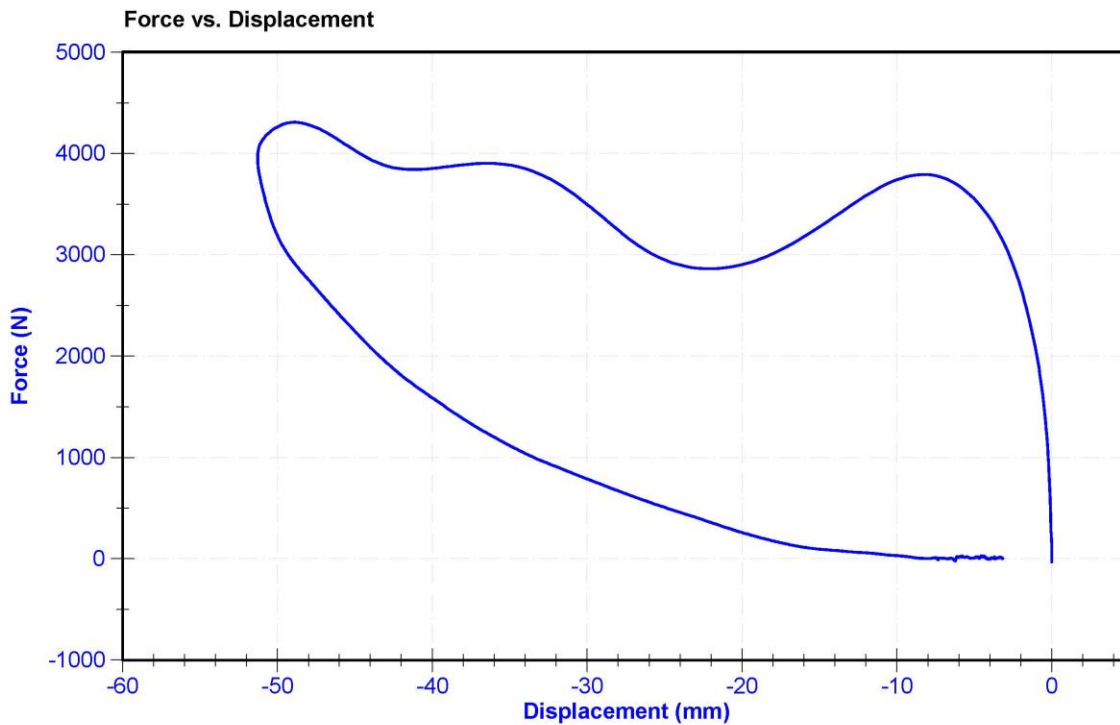

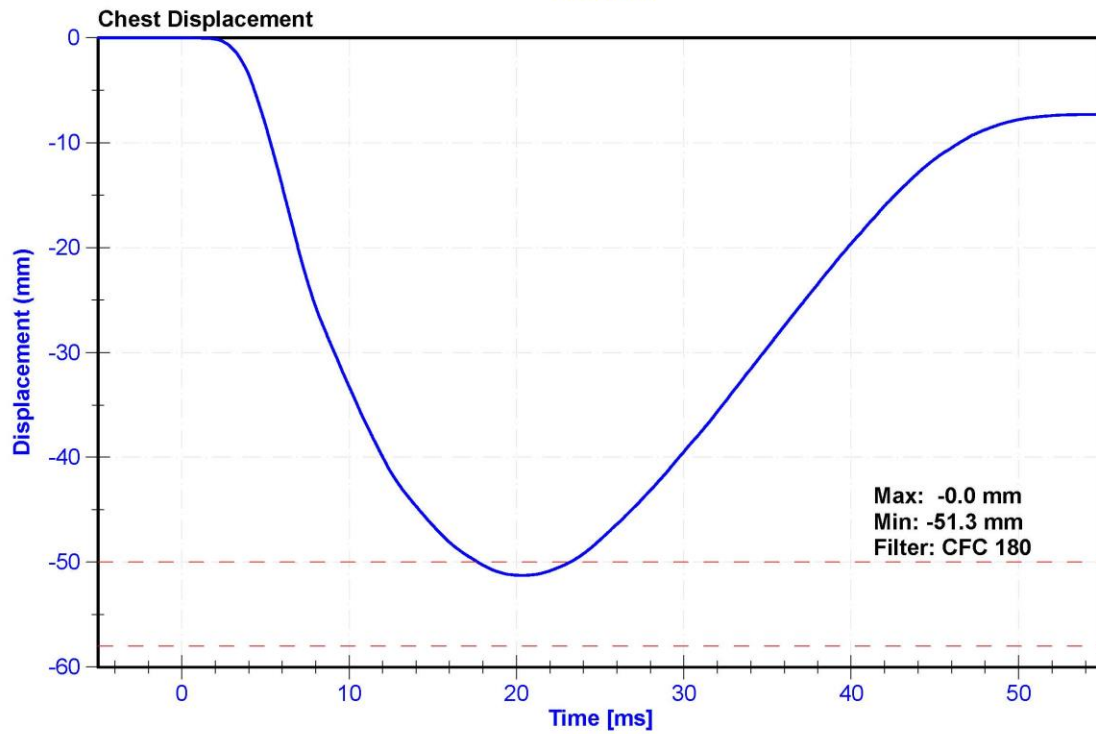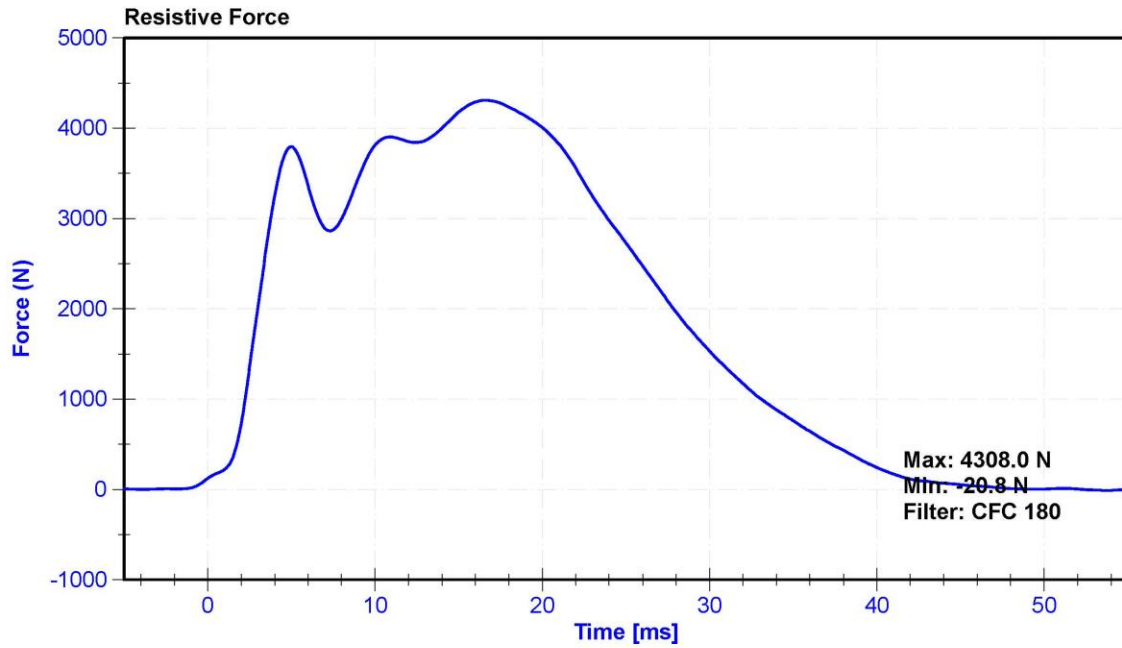

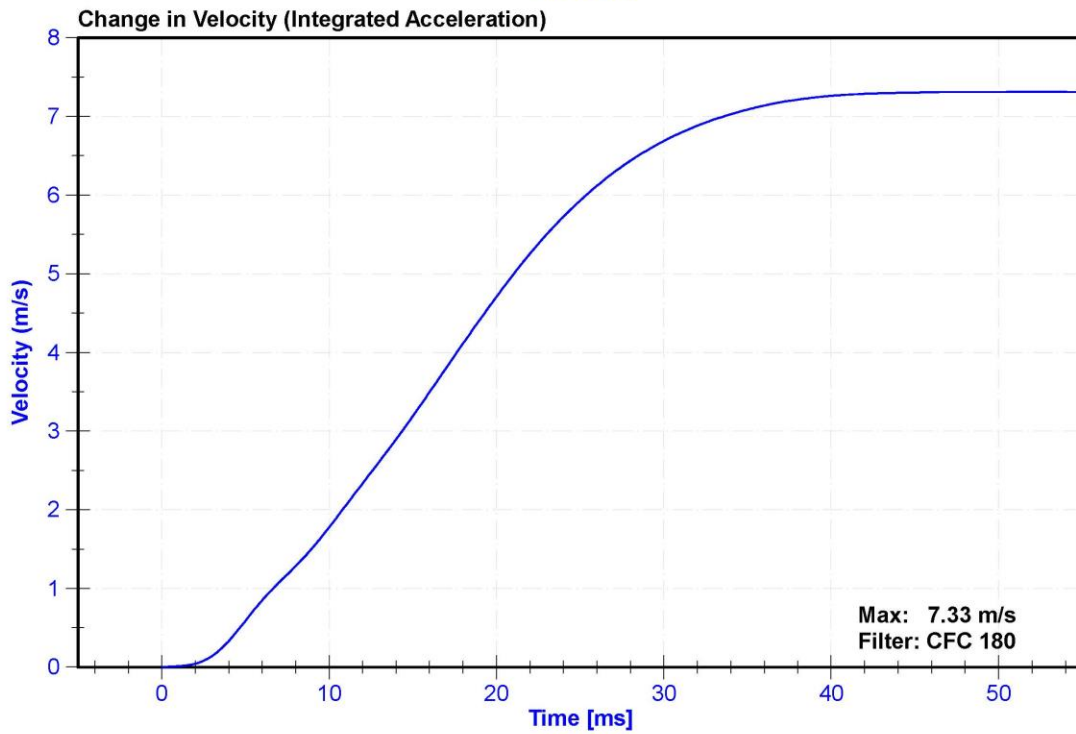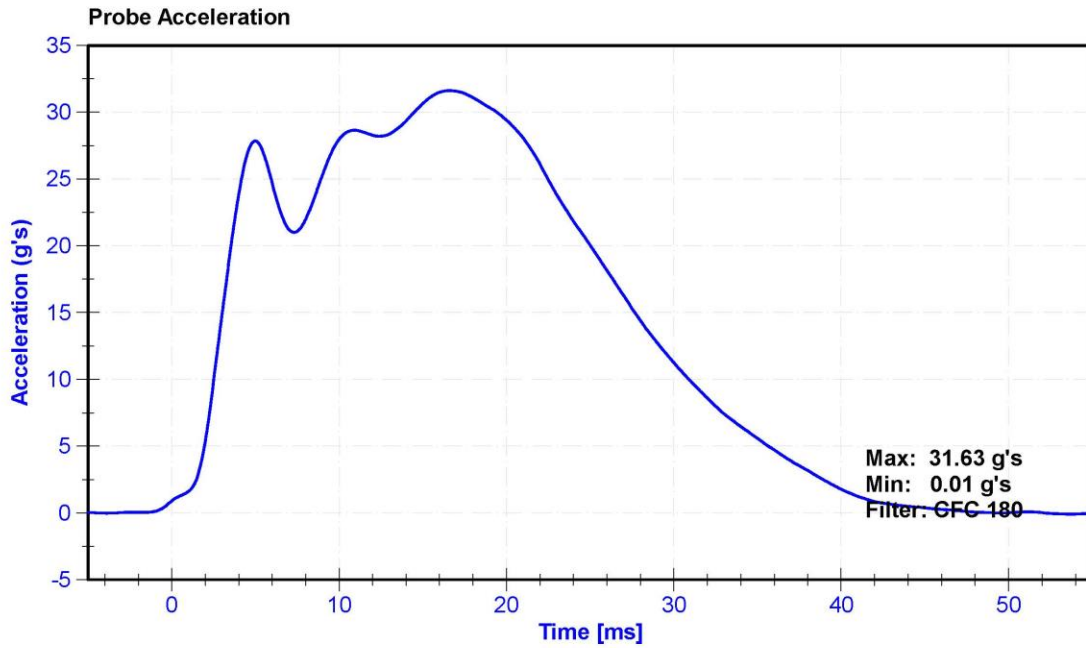


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	140	Laboratory Supervisor	K. Brogan

Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.6	25.6	°C	20.8	Pass
Humidity	10	70	%	22.3	Pass
Initial Angle	0	20	deg	17.9	Pass
Force at 45 Degrees	320	390	N	349.7	Pass
Return Angle Relative to Initial	0	8	deg	5.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Potentiometer	Rieker N4C-1	DS-13051548	12/9/2019	12/8/2020
Load Cell	Interface SML-200	LC-493319	1/10/2020	1/9/2021

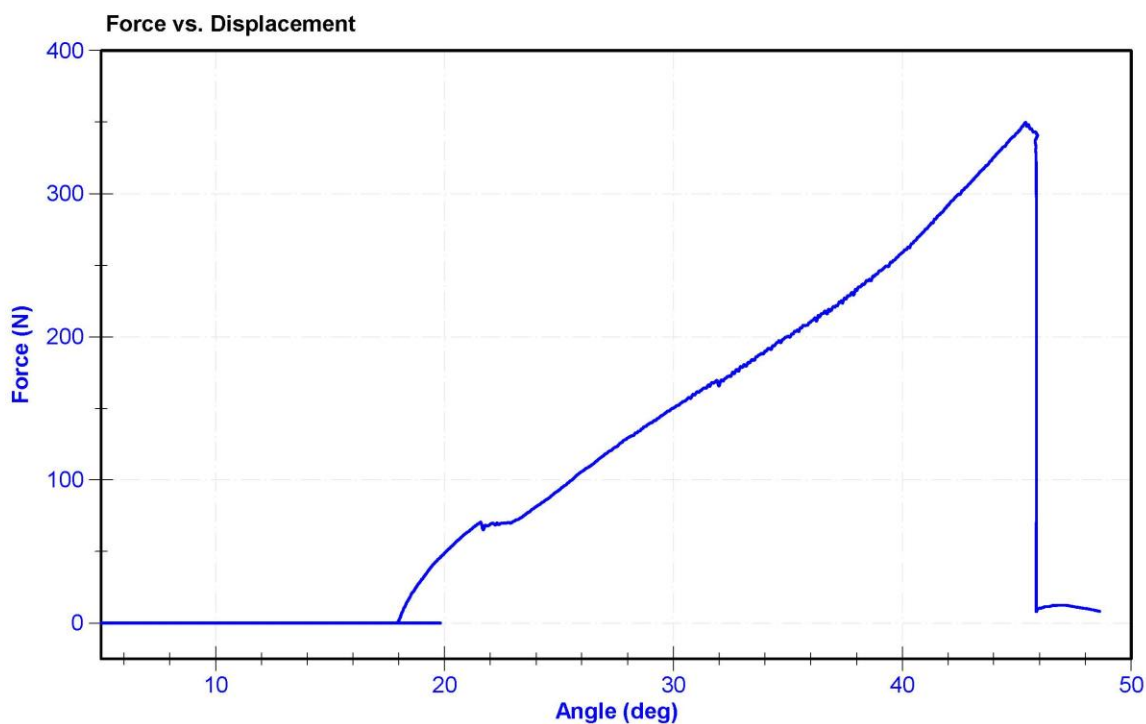


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	27.2	Pass
Velocity	2.07	2.13	m/s	2.086	Pass
Resistive Force	3450	4060	N	3892.0	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	Measurement Specialties	A286228	9/27/2019	9/27/2020

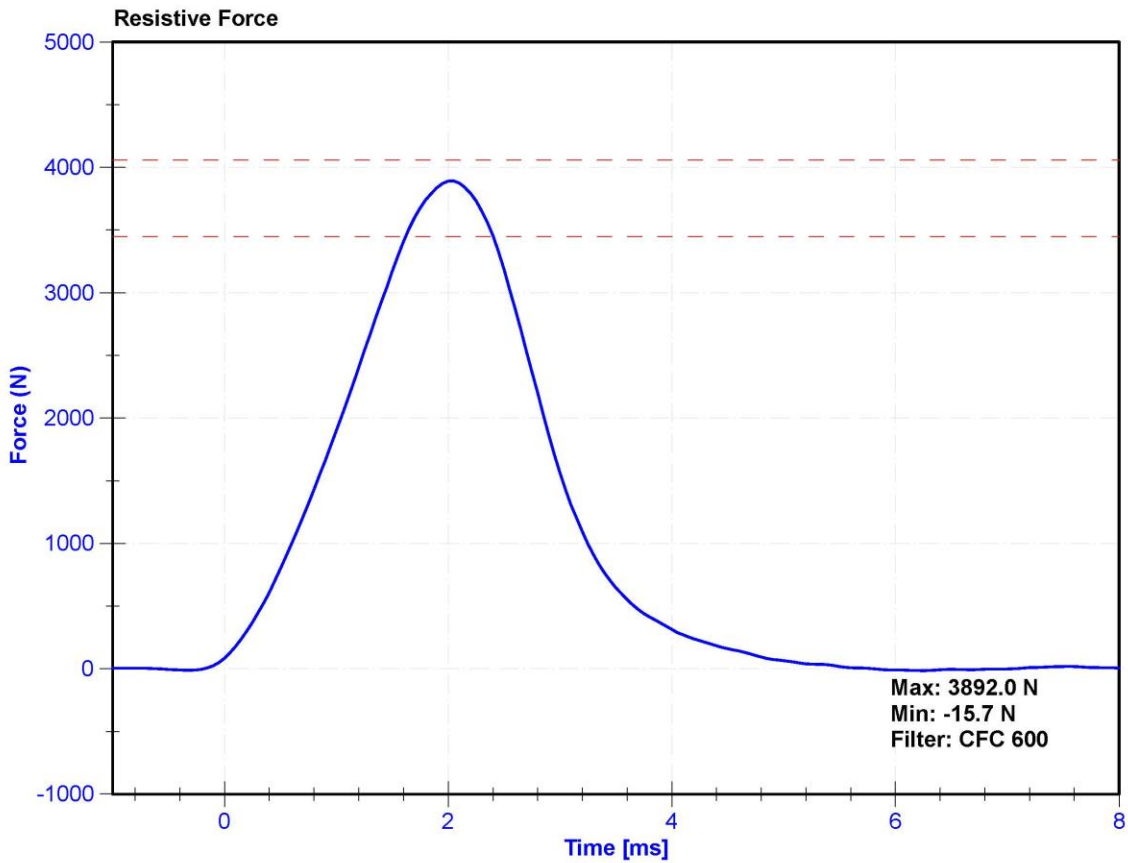

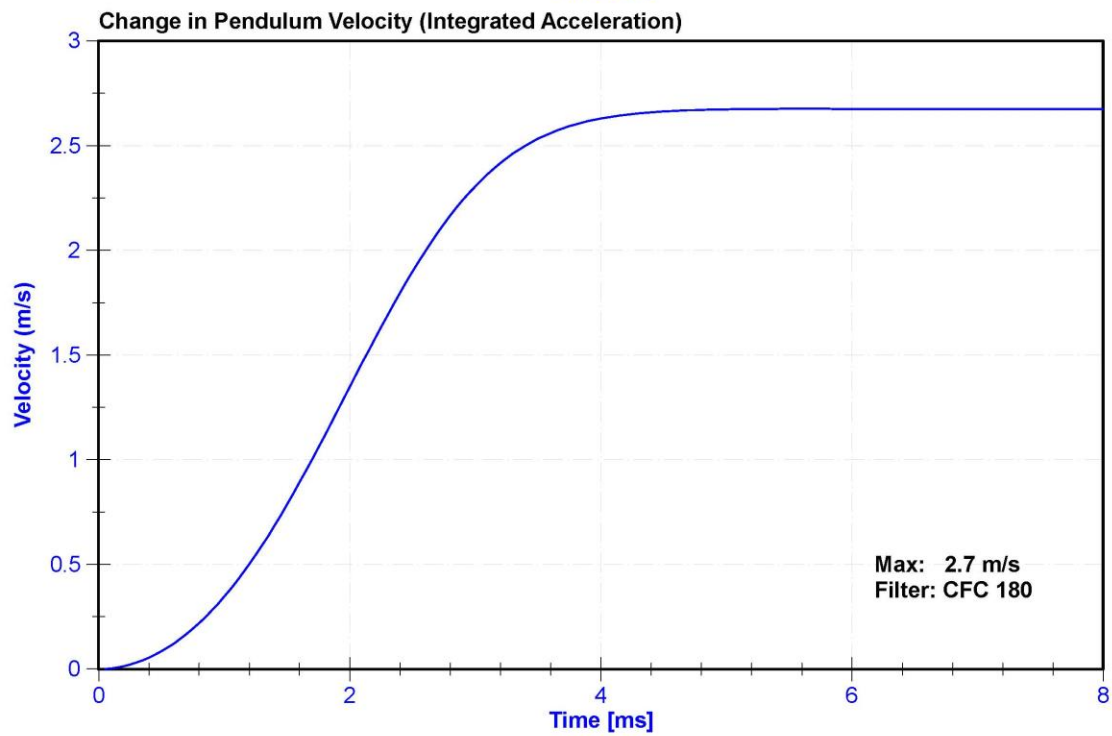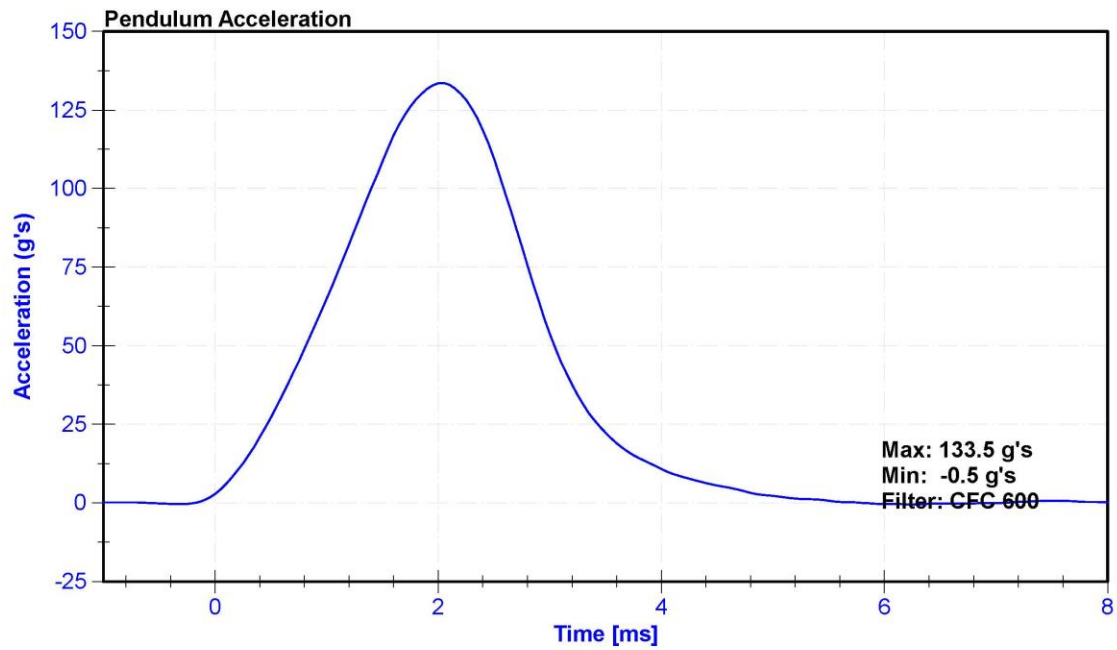


ATD Manufacturer	Humanetics	Test Technician	E. Helenbrook
ATD Serial Number	140	Laboratory Supervisor	K. Brogan



Results

Test Parameter	Minimum Specification	Maximum Specification	Unit	Result	Pass/Fail
Temperature	18.9	25.6	°C	21.5	Pass
Humidity	10	70	%	27.2	Pass
Velocity	2.07	2.13	m/s	2.086	Pass
Resistive Force	3450	4060	N	3630.9	Pass

Transducer Calibrations

Channel	Manufacturer	Serial Number	Calibration Date	Calibration Due Date
Pendulum Accelerometer	Measurement Specialties	A286228	9/27/2019	9/27/2020

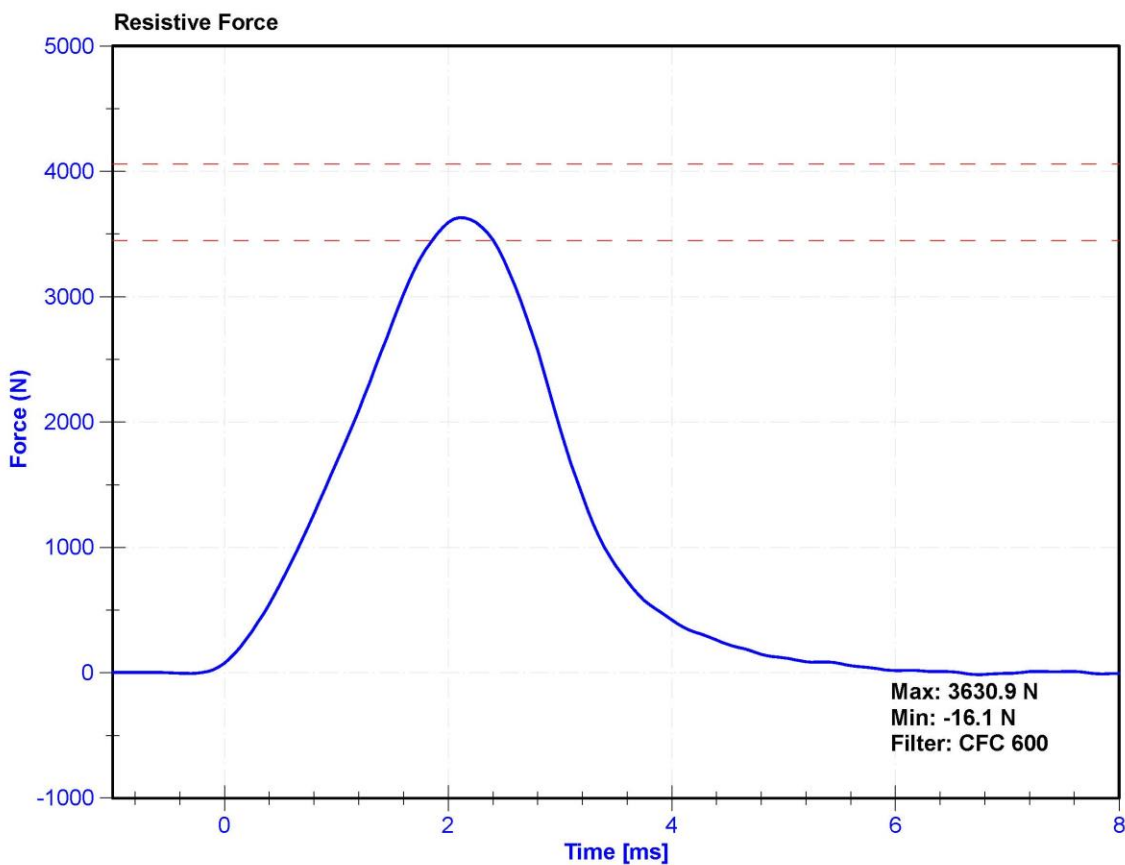

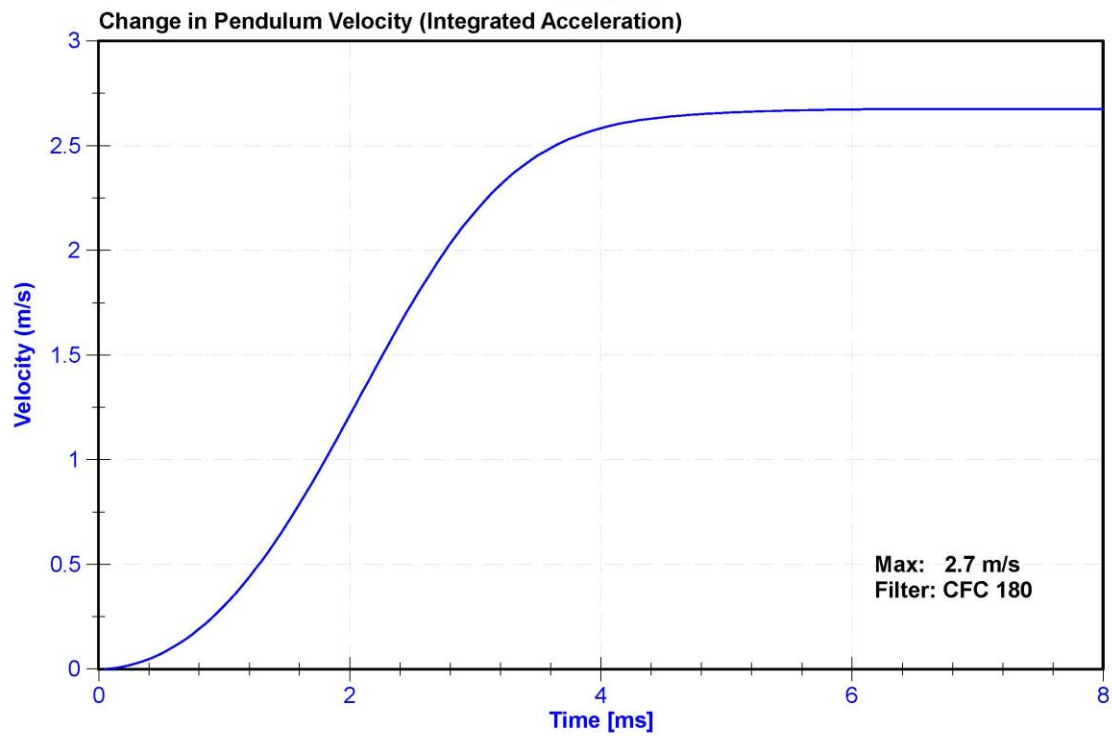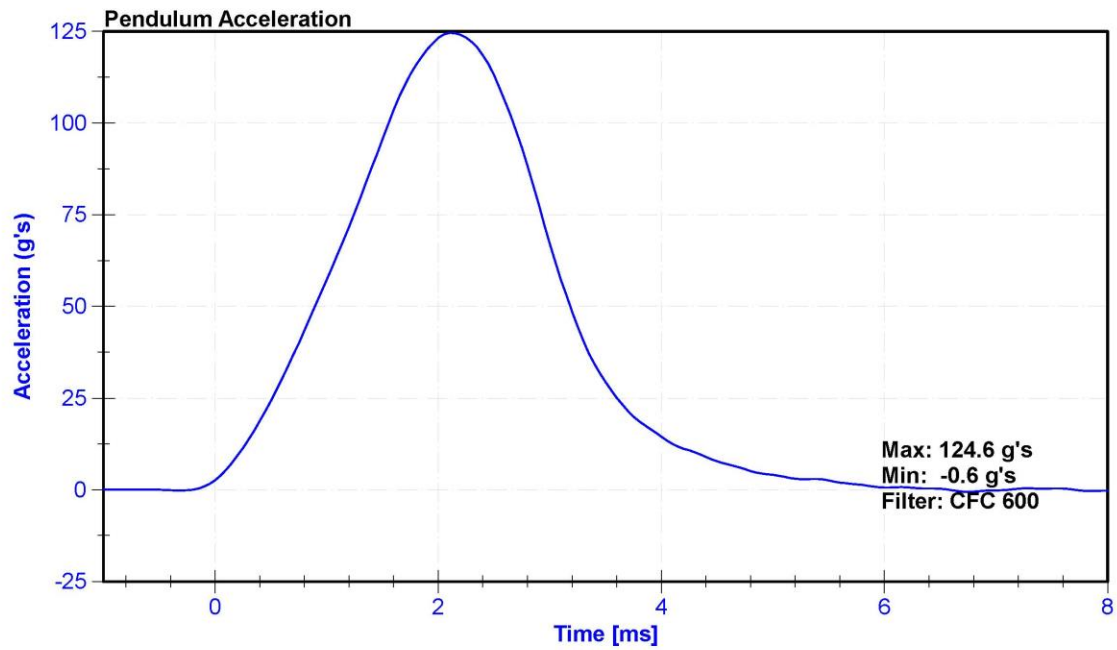

APPENDIX D

DUMMY CALIBRATION AND PERFORMANCE VERIFICATION DATA

Table 1 – Driver Dummy Instrumentation

Instrumentation		Axis/Location	Hybrid III 50 th S/N: 142		
			Serial Number	Manufacturer	Calibration Date
Head Accelerometers	Primary	X	P51681	ENDEVCO	8/13/2019
		Y	P64151	ENDEVCO	8/13/2019
		Z	P52114	ENDEVCO	8/13/2019
	Redundant	X	P58833	ENDEVCO	8/13/2019
		Y	P58905	ENDEVCO	8/13/2019
		Z	P63996	ENDEVCO	8/13/2019
Head Angular Rate Sensors		X	ARS-5941 GFE	DTS ARS	7/8/2019
		Y	ARS-6014 GFE	DTS ARS	7/8/2019
		Z	ARS-5990	DTS ARS	7/8/2019
Upper Neck Load Cell		FX, Fy, Fz MX,MY, MZ	17162019 FX	Denton	2/18/2019
Chest Accelerometers	Primary	X	AC-P51994	ENDEVCO	10/21/2019
		Y	AC-P51991	ENDEVCO	10/21/2019
		Z	AC-P49185	ENDEVCO	10/21/2019
	Redundant	X	AC-P51713	ENDEVCO	10/21/2019
		Y	AC-P68059	ENDEVCO	10/21/2019
		Z	AC-P78824	ENDEVCO	10/21/2019
Chest Potentiometer		X	DS-142	JDK	9/12/2019
Pelvis Accelerometer		X	AC-P58800	ENDEVCO	12/9/2019
		Y	AC-P52157	ENDEVCO	12/9/2019
		Z	AC-P52156	ENDEVCO	12/9/2019
Femur Load Cells - Left	Primary	Z	LC-115-1 Fz	Denton	10/3/2019
	Redundant	Z	LC-115-2 Fz	Denton	10/3/2019
Femur Load Cells - Right	Primary	Z	LC-DI4210FZ1	Denton	10/3/2019
	Redundant	Z	LC-DI4210FZ2	Denton	10/3/2019
Tibia Load Cells - Left	Upper	MX, MY, FZ	LC-404Fx	Denton	9/25/2019
	Lower	MX, MY, FZ	LC-396Fz	Denton	9/25/2019
Tibia Load Cells – Right	Upper	MX, MY, FZ	LC-651 Fz	Denton	2/18/2019
	Lower	MX, MY, FZ	LC-364Fz	Denton	9/25/2019
Foot Accelerometers - Left	Rear	X	AC-P50084	ENDEVCO	9/30/2019
	Front	Z	AC-P58779	ENDEVCO	9/30/2019
Foot Accelerometers - Right	Rear	X	AC-P51872	ENDEVCO	10/1/2019
	Front	Z	AC-P58893	ENDEVCO	9/30/2019
Seat belt Load Cells	Lap		LC-278	FTSS	11/2/2019
	Shoulder		LC-290	FTSS	11/2/2019

Table 2 – Front Passenger Dummy Instrumentation

Instrumentation		Axis/Location	Hybrid III 5 th S/N: 140		
			Serial Number	Manufacturer	Calibration Date
Head Accelerometers	Primary	X	AC-P58998	ENDEVCO	9/30/2019
		Y	AC-P51722	ENDEVCO	10/1/2019
		Z	AC-P58997	ENDEVCO	9/30/2019
	Redundant	X	AC-P58780	ENDEVCO	9/30/2019
		Y	AC-P58749	ENDEVCO	9/30/2019
		Z	AC-P58909	ENDEVCO	9/30/2019
Head Angular Rate Sensors		X	ARS16992	ENDEVCO	5/28/2019
		Y	ARS-4712 GFE	DTS ARS	7/8/2019
		Z	ARS11293	DTS ARS	5/28/2019
Upper Neck Load Cell		FX, Fy, Fz MX,MY, MZ	LC-2206Fx	Denton	2/18/2019
Chest Accelerometers	Primary	X	AC-P59019	ENDEVCO	9/30/2019
		Y	AC-P51965	ENDEVCO	9/30/2019
		Z	AC-P58981	ENDEVCO	9/30/2019
	Redundant	X	AC-P64000	ENDEVCO	9/30/2019
		Y	AC-P51970	ENDEVCO	9/30/2019
		Z	AC-P51689	ENDEVCO	9/30/2019
Chest Potentiometer		X	DS-140GFE	SERVO	6/21/2019
Pelvis Accelerometer		X	AC-P58912	ENDEVCO	10/21/2019
		Y	AC-P51220	ENDEVCO	10/21/2019
		Z	AC-P51989	ENDEVCO	10/21/2019
Femur Load Cells - Left	Primary	Z	LC-DI4213-1	Denton	2/18/2019
	Redundant	Z	LC-DI4213-2	Denton	2/18/2019
Femur Load Cells - Right	Primary	Z	LC-DH3271Fz1	Denton	2/18/2019
	Redundant	Z	LC-DH3271Fz2	Denton	2/18/2019
Tibia Load Cells - Left	Upper	MX, MY, FZ	3643-93 Fz	Denton	10/3/2019
	Lower	MX, MY, FZ	LC-490Fz	Denton	10/3/2019
Tibia Load Cells – Right	Upper	MX, MY, FZ	LC-91Fz	Denton	10/3/2019
	Lower	MX, MY, FZ	LC-398Fz	Denton	10/3/2019
Foot Accelerometers - Left	Rear	X	AC-P64005	ENDEVCO	10/21/2019
	Front	Z	AC-P64006	ENDEVCO	10/21/2019
Foot Accelerometers - Right	Rear	X	AC-P52018	ENDEVCO	10/21/2019
	Front	Z	AC-P78669	ENDEVCO	10/21/2019
Seat belt Load Cells	Lap		LC-174	FTSS	5/4/2019
	Shoulder		LC-DK1753	FTSS	5/4/2019

Table 3 – Vehicle Instrumentation

Instrumentation			Axis	Serial Number	Manufacturer	Calibration Date
Crossmember/Rear Seat Accelerometers	Left	Primary	X	A282709	MSI	9/17/2019
			Z	A283660	MSI	9/11/2019
		Redundant	X	A283599	MSI	9/17/2019
	Right	Primary	X	AC-A280198	MSI	10/15/2019
			Z	A284351	MSI	10/9/2019
		Redundant	X	A284263	MSI	9/11/2019
Engine Accelerometers	Top		X	AC-A280926	MSI	12/5/2019
	Bottom		X	AC-A222648	MSI	10/18/2019