

REPORT NUMBER: 214D-CAL-23-001

**SAFETY COMPLIANCE TESTING FOR FMVSS 214
SIDE IMPACT PROTECTION**

**AUDI AG
2023 Audi A3
Four Door Sedan**

NHTSA No: C20235803

**PREPARED BY:
CALSPAN CORPORATION
P.O. BOX 400
BUFFALO, NEW YORK 14225**



December 15, 2022


FINAL REPORT

**PREPARED FOR:
U.S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
ENFORCEMENT
OFFICE OF VEHICLE SAFETY COMPLIANCE
1200 NEW JERSEY AVE. S.E.
WEST Bldg. (NVS-220)
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Safety Administration, in response to Contract Number DTNH22-17-D-00078.

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof.

If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by:  Date: December 15, 2022
Quinn Porzio, Test Engineer

Approved by:  Date: December 15, 2022
Vanessa Hansen, Operations Manager

FINAL REPORT ACCEPTANCE BY OVSC:

Accepted by

Date: _____

TECHNICAL REPORT DOCUMENTATION PAGE

| 1. Report No. 214D-CAL-23-001 | 2. Government Accession No. | 3. Recipient's Catalog No. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|---|---------------------|--|--|-------|------|--------|---|-----|------|---------|------------------------|----|----|--------|-------------------------|---|------|---------|-----------------------|---|------|----------|--|--|-------------------------|-------------------------|--|--|-------|------|--------|---|-----|------|---------|------------------------------------|---|----|--------|---|---|------|----------|---------------------------------|----|-----|--------|----------------------------------|----|-----|--------|
| 4. Title and Subtitle Final Report of 214D Compliance Test Side Impact Protection Testing of 2023 Audi A3 NHTSA No.: C20235803 | | 5. Report Date December 15, 2022 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7. Author(s) Quinn Porzio, Test Engineer Vanessa Hansen, Operations Manager | | 6. Performing Organization Code CAL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9. Performing Organization Name and Address Calspan Corporation Transportation Test Operation P.O. Box 400 Buffalo, New York 14225 | | 8. Performing Organization Report No. 214D-CAL-23-001 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Enforcement Office of Vehicle Safety Compliance 1200 New Jersey Ave., SE, Room W43-503 Washington, D.C. 20590 | | 10. Work Unit No. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 11. Contract or Grant No. DTNH22-17-D-00078 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 13. Type of Report and Period Covered: Final Test Report, November 22, 2022 - December 15, 2022 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 15. Supplementary Notes | | 14. Sponsoring Agency Code NEF-240 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16. Abstract A 48/24 kph 90° Impact (Moving Deformable Barrier) Compliance Tests was conducted on the subject 2023 Audi A3 Four Door Sedan in accordance with the specifications of the Office of Vehicle Safety Compliance Test Procedure No. TP-214D-09 for the determination of FMVSS No. 214 Side Impact Protection compliance. The test was conducted at Calspan Corporation's Transportation Test Operations facility in Buffalo, New York on November 22, 2022. The impact velocity of the Moving Deformable Barrier (MDB) was 52.80 kph, and the ambient temperature at the struck side (driver side) of the target vehicle at the time of impact was 21°C. The target vehicle post-test maximum crush was 157 mm at level 2. The test vehicle's occupant performance is as follows: | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <thead> <tr> <th rowspan="2">Measurement Description</th> <th colspan="3">Driver ATD (ES-2re)</th> </tr> <tr> <th>Units</th> <th>IARV</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC₃₆)</td> <td>N/A</td> <td>1000</td> <td>109.231</td> </tr> <tr> <td>Maximum Rib Deflection</td> <td>mm</td> <td>44</td> <td>16.243</td> </tr> <tr> <td>Sum of Abdominal Forces</td> <td>N</td> <td>2500</td> <td>602.134</td> </tr> <tr> <td>Pubic Symphysis Force</td> <td>N</td> <td>6000</td> <td>1367.938</td> </tr> </tbody> </table> | | Measurement Description | Driver ATD (ES-2re) | | | Units | IARV | Result | Head Injury Criteria (HIC ₃₆) | N/A | 1000 | 109.231 | Maximum Rib Deflection | mm | 44 | 16.243 | Sum of Abdominal Forces | N | 2500 | 602.134 | Pubic Symphysis Force | N | 6000 | 1367.938 | <table border="1"> <thead> <tr> <th rowspan="2">Measurement Description</th> <th colspan="3">Passenger ATD (SID-IIs)</th> </tr> <tr> <th>Units</th> <th>IARV</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>Head Injury Criteria (HIC₃₆)</td> <td>N/A</td> <td>1000</td> <td>282.663</td> </tr> <tr> <td>Lower Spine Resultant Acceleration</td> <td>G</td> <td>82</td> <td>48.574</td> </tr> <tr> <td>Total Pelvic Force (sum of acetabular and iliac forces)</td> <td>N</td> <td>5525</td> <td>2958.759</td> </tr> <tr> <td>Maximum Thoracic Rib Deflection</td> <td>mm</td> <td>38*</td> <td>23.357</td> </tr> <tr> <td>Maximum Abdominal Rib Deflection</td> <td>mm</td> <td>45*</td> <td>17.629</td> </tr> </tbody> </table> | | Measurement Description | Passenger ATD (SID-IIs) | | | Units | IARV | Result | Head Injury Criteria (HIC ₃₆) | N/A | 1000 | 282.663 | Lower Spine Resultant Acceleration | G | 82 | 48.574 | Total Pelvic Force (sum of acetabular and iliac forces) | N | 5525 | 2958.759 | Maximum Thoracic Rib Deflection | mm | 38* | 23.357 | Maximum Abdominal Rib Deflection | mm | 45* | 17.629 |
| Measurement Description | Driver ATD (ES-2re) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Units | IARV | Result | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Head Injury Criteria (HIC ₃₆) | N/A | 1000 | 109.231 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Maximum Rib Deflection | mm | 44 | 16.243 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Sum of Abdominal Forces | N | 2500 | 602.134 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pubic Symphysis Force | N | 6000 | 1367.938 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Measurement Description | Passenger ATD (SID-IIs) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Units | IARV | Result | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Head Injury Criteria (HIC ₃₆) | N/A | 1000 | 282.663 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Lower Spine Resultant Acceleration | G | 82 | 48.574 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Total Pelvic Force (sum of acetabular and iliac forces) | N | 5525 | 2958.759 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Maximum Thoracic Rib Deflection | mm | 38* | 23.357 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Maximum Abdominal Rib Deflection | mm | 45* | 17.629 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| The two doors on the struck side of the vehicle did not separate from the body at the hinges or latches and the opposite doors did not open during the side impact event. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 17. Key Words Compliance Testing Side Impact Protection MDB ES-2re SID-IIs | | 18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services (TIS) Room E12-100 East Bldg. 1200 New Jersey Ave. Washington, D.C. 20590 Telephone No. (202) 366-2588 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 19. Security Class. (of this report) UNCLASSIFIED | 20. Security Class. (of this page) UNCLASSIFIED | 21. No. of Pages 294 | 22. Price | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

TABLE OF CONTENTS

| <u>Section</u> | | <u>Page</u> |
|-----------------------|--|-----------------|
| 1 | Purpose and Summary of the Test | 1-1 |
| 2 | Occupant and Vehicle Information | 2-1 |
| <u>Data Sheet</u> | | <u>Page</u> |
| 1 | Test Vehicle Information and Options | 2-2 |
| 2 | General Test and Vehicle Parameter Data | 2-4 |
| 3 | Seat and Seat Belt Adjustment Data | 2-5 |
| 4 | Fuel Systems and Steering Wheel Position Data | 2-6 |
| 5 | Dummy Longitudinal Clearance Dimensions | 2-7 |
| 6 | Dummy Lateral Clearance Dimensions | 2-8 |
| 7 | High Speed Camera Locations | 2-9 |
| 8 | Test Vehicle Accelerometer Locations | 2-10 |
| 9 | Test Vehicle Accelerometer Data Summary | 2-11 |
| 10 | MDB Accelerometer Locations and Data Summary | 2-12 |
| 11 | MDB Summary of Results | 2-13 |
| 12 | Dummy Injury Response Data for ES-2re | 2-14 |
| 13 | Dummy Injury Response Data for SID-IIs | 2-15 |
| 14 | Post Test Observations | 2-16 |
| 15 | Vehicle Pre-test and Post-test Measurements | 2-17 |
| 16 | Exterior Crush Measurements | 2-18 |
| 17 | Vehicle Exterior Crush Profiles | 2-19 |
| 18 | Exterior Static Crush for Impactor Face | 2-21 |
| 19 | Temperature and Humidity Trace | 2-22 |
| <u>Appendix</u> | | <u>Page</u> |
| I | Photographs | I-1 |
| II | ES-2re Dummy Response Data | II-1 |
| III | SID-IIs Dummy Response Data | III-1 |
| IV | Vehicle and MDB Accelerometer Response Data | IV-1 |
| V | ES-2re Performance Calibration Test Data | V-1 |
| VI | SID-IIs Performance Calibration Test Data | VI-1 |
| VII | Test Equipment and Instrumentation Calibration | VII-1 |
| VIII | Check Sheets | V-III-1 |

SECTION 1 PURPOSE AND SUMMARY OF TEST

PURPOSE

This moving deformable barrier side impact test was conducted as part of the MY 2023 214 Side Impact Protection Compliance Test Program, sponsored by the National Highway Traffic Safety Administration (NHTSA), under Contract No. DTNH22-17-D-00078. The purpose of this test was to evaluate side impact protection in a 2023 Audi A3 Four Door Sedan. The side impact test was conducted in accordance with the Office of Vehicle Safety Compliance's Laboratory Test Procedure, TP-214D-09 dated September 2012.

SUMMARY

A 2023 Audi A3 Four Door Sedan was impacted on the left side by a Moving Deformable Barrier (MDB) which was moving forward in a 27° crabbed position to the tow road guidance system at a velocity of 52.80 kph (32.8 mph). The target vehicle was stationary and was positioned at an angle of 63° to the line of forward motion. The side impact test was conducted by the Calspan Corporation's Transportation Test Operations Center in Buffalo, New York on November 22, 2022. Pre-test and post test photographs of the test vehicle, the MDB and test dummies are included in this report.

Test dummies were placed in both the driver and left rear designated seating positions according to instructions specified in the OVSC Test Procedure data September 2012. The side impact event was documented by 9 cameras. Camera locations and other pertinent camera information are included in this report.

The ES2re male dummy was instrumented with triaxial accelerometer packs located in the head, three rib displacement transducers located in the chest, three load cells located in the abdomen and a load cell located in the pubic symphysis.

The SID-II female dummy was instrumented with triaxial accelerometer packs located in the head and the spine and load cells located in the pubic symphysis and acetabulum. A summary of each dummy's configuration and performance verification test data has been included in this report along with the dummy response traces.

Injury readings for the dummies were recorded as follows:

INJURY READINGS

| ES-2re Injury Criteria | Units | Max. Allowable IARV | Measured Value | Pass/Fail |
|-----------------------------------|--------------|--------------------------------|---------------------------|------------------|
| HIC | | 1000 | 109.231 | Pass |
| Upper Rib Deflection | mm | 44 | 12.779 | Pass |
| Mid Rib Deflection | mm | | 13.519 | Pass |
| Lower Rib Deflection | mm | | 16.243 | Pass |
| Abdominal Load (front) | N | | 161.322 | |
| Abdominal Load (mid) | N | | 216.015 | |
| Abdominal Load (rear) | N | | 306.689 | |
| Sum of Abdomen Forces | N | 2500 | 602.134 | Pass |
| Pubic Symphysis | N | 6000 | 1367.938 | Pass |

INJURY READINGS

| SIDIs Injury Criteria | Units | Max. Allowable IARV | Measured Value | Pass/Fail |
|----------------------------------|--------------|--------------------------------|---------------------------|------------------|
| HIC | | 1000 | 282.663 | Pass |
| Max Spine Acceleration | g | 82 | 48.574 | Pass |
| Acetabulum Force | N | | 2428.508 | |
| Iliac Force | N | | 693.064 | |
| Sum of Acetabular and Iliac | N | 5525 | 2958.759 | Pass |

SECTION 2

OCCUPANT AND VEHICLE INFORMATION

This section contains information reporting for the following Data Sheets:

| <u>Data Sheet</u> | | <u>Page</u> |
|-------------------|---|-------------|
| 1 | Test Vehicle Information and Options | 2-2 |
| 2 | General Test and Vehicle Parameter Data | 2-4 |
| 3 | Seat and Seat Belt Adjustment Data | 2-5 |
| 4 | Fuel Systems and Steering Wheel Position Data | 2-6 |
| 5 | Dummy Longitudinal Clearance Dimensions | 2-7 |
| 6 | Dummy Lateral Clearance Dimensions | 2-8 |
| 7 | High Speed Camera Locations | 2-9 |
| 8 | Test Vehicle Accelerometer Locations | 2-10 |
| 9 | Test Vehicle Accelerometer Data Summary | 2-11 |
| 10 | MDB Accelerometer Locations and Data Summary | 2-12 |
| 11 | MDB Summary of Results | 2-13 |
| 12 | Dummy Injury Response Data for ES-2re | 2-14 |
| 13 | Dummy Injury Response Data for SID-IIs | 2-15 |
| 14 | Post Test Observations | 2-16 |
| 15 | Vehicle Pre-test and Post-test Measurements | 2-17 |
| 16 | Exterior Crush Measurements | 2-18 |
| 17 | Vehicle Exterior Crush Profiles | 2-19 |
| 18 | Exterior Static Crush for Impactor Face | 2-21 |
| 19 | Temperature and Humidity Trace | 2-22 |

**DATA SHEET NO. 1
TEST VEHICLE INFORMATION AND OPTIONS**

Test Vehicle: 2023 Audi A3 Four Door Sedan
 Test Facility: Calspan

NHTSA No.: C20235803
 Test Date: 11/22/2022

TEST VEHICLE INFORMATION AND OPTIONS

| | | | |
|--------------------------|--------------------|--|-----|
| Make | Audi | Anti-Lock Brakes (ABS) | Yes |
| Model | A3 | All-Wheel Drive (AWD) | No |
| Body Style | Four Door Sedan | Traction Control System (TCS) | Yes |
| VIN | WAUUAUDGYXPA012248 | Electric Stability Control (ECS) | Yes |
| Body Color | Black | Side Curtain Airbags | Yes |
| Engine Displacement (L) | 2.0 | Torso Airbags – Front Seats | Yes |
| Type/No. Cylinders | I4 | Torso Airbags – Rear Seats | Yes |
| Engine Placement | Transverse | Combination/Head Torso Bag | No |
| Transmission Type | Automatic | Pelvic Airbag – Front Seats | No |
| Transmission Speeds | 7-Speed | Pelvis Airbag – Rear Seats | No |
| Overdrive | Yes | Knee Airbag – Driver | Yes |
| Final Drive | Front Wheel Drive | Knee Airbag – Front Passenger | Yes |
| Odometer Reading (km/mi) | 33 mi | Seat Belt Pretensioners – Front Seats | Yes |
| | | Seat Belt Pretensioners – Rear Seats | Yes |
| | | Seat Belt Load Limiter – Front Seats | Yes |
| | | Seat Belt Load Limiter – Rear Seats | Yes |
| | | Tire Pressure Monitoring System (TPMS) | Yes |
| | | Tilt Steering Wheel | Yes |
| | | Automatic Door Locks (ADL) | Yes |
| | | Power Window Auto-reverse | Yes |
| | | Power Seats | Yes |

DATA FROM CERTIFICATION LABEL

| | | | |
|---------------------|---------------|-----------------|----------|
| Manufactured By | Audi AG | GVWR (kg) | No Data* |
| Date of Manufacture | 07/22 | GAWR Front (kg) | No Data* |
| Vehicle Type | Passenger Car | GAWR Rear (kg) | No Data* |

*Information was missing from the certification label see page I-16, Photo No. A-27

VEHICLE SEATING AND CAPACITY WEIGHT DATA

| Measured Parameter | Front | Rear | Third | Total |
|-----------------------------------|--------|-------|-------|-------|
| Type of Seats (Bench or Bucket) | Bucket | Bench | - | |
| Designated Seating Capacity (DSC) | 2 | 3 | - | 5 |
| Capacity Weight (VCW) (kg) | | | | 390 |


**DATA SHEET NO. 1 (continued)
VEHICLE TIRE INFORMATION**

Test Vehicle: 2023 Audi A3 Four Door Sedan
 Test Facility: Calspan

NHTSA No.: C20235803
 Test Date: 11/22/2022

VEHICLE TIRE INFORMATION

Collected for year, make, model, & VIN, all items circled in red, tire manufacturer and tire name.

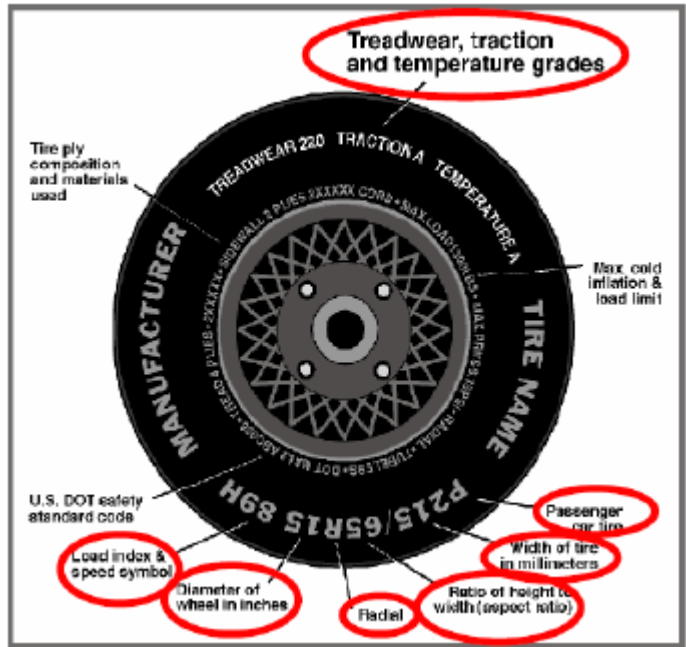

TIRE SIDEWALL INFORMATION

| Tire Placard | Front | Rear |
|---------------------------------|--------------|--------------|
| Recommended Cold Pressure (kPa) | 280 | 260 |
| Recommended Tire Size | 225/45R17 | 225/45R17 |
| Tire Sidewall | Front | Front |
| Maximum Tire Pressure (kPa) | 350 | 350 |
| Tire Size on Vehicle | 225/45R17 | 225/45R17 |
| Tire Manufacturer Model | Pirelli | Pirelli |
| Tire Name | P Zero | P Zero |
| Tire Type | All Season | All Season |
| Tire Width | 225 | 225 |
| Aspect Ratio | 45 | 45 |
| Radial | Yes | Yes |
| Wheel Diameter (in.) | 17" | 17" |
| Load Index/Speed Symbol | 91H | 91H |
| Treadwear | 500 | 500 |
| Traction Grade | A | A |
| Temperature Grade | A | A |

**DATA SHEET NO. 2
GENERAL TEST AND VEHICLE PARAMETER DATA**

Test Vehicle: 2023 Audi A3 Four Door Sedan
 Test Facility: Calspan

NHTSA No.: C20235803
 Test Date: 11/22/2022

TIRE PRESSURES

| | Units | LF | RF | LR | RR |
|--------------|-------|-----|-----|-----|-----|
| As Delivered | kPa | 271 | 264 | 268 | 263 |
| As Tested | kPa | 280 | 280 | 260 | 260 |

TEST VEHICLE AXLE WEIGHTS

| | Units | As Delivered (UVW) | | | Fully Loaded | | | As Tested | | |
|--------|-------|--------------------|------|-------|--------------|------|-------|-----------|------|-------|
| | | Front | Rear | Total | Front | Rear | Total | Front | Rear | Total |
| Left | kg | 454 | 302 | | 499 | 380 | | 494 | 367 | |
| Right | kg | 459 | 296 | | 468 | 347 | | 477 | 345 | |
| Ratio | % | 60.4 | 39.5 | | 57.1 | 42.9 | | 57.7 | 42.3 | |
| Totals | kg | 913 | 598 | 1511 | 967 | 727 | 1694 | 971 | 712 | 1683 |

TEST VEHICLE TARGET WEIGHT (TVTW) CALCULATION

| Measured Parameter | Units | Value | |
|---|-------|--------|---------|
| As Delivered Weight (UVW) | kg | 1511 | (A) |
| Weight of 2 P572 ATDs | kg | 131 | (B) |
| Rated Cargo / Luggage Weight (RCLW) | kg | 49.8 | (C) |
| Calculated Vehicle Target Weight (TVTW) | kg | 1691.8 | (A+B+C) |

TEST VEHICLE ATTITUDES AND CG

| Wheel Opening Location | Distance (grd to ref. point above wheel opening in mm) | | Difference (mm) | Meets Requirement** |
|------------------------|--|-----------|-----------------|---------------------|
| | Fully Loaded | As Tested | | |
| Left Front | 684 | 686 | 2 | Yes |
| Right Front | 693 | 693 | 0 | Yes |
| Left Rear | 672 | 682 | 10 | Yes |
| Right Rear | 682 | 676 | 6 | Yes |

*** The "As Tested" vehicle attitude measurements must be equal to or within ± 10 mm of the "Fully Loaded" vehicle attitude measurements at each wheel well. Indicate "Yes" or "No" for "Meets Requirements".

MDB IMPACT POINT DATA

| Measured Parameter | Distance (mm) | Met Requirement |
|---|---------------|-----------------|
| Test Vehicle Wheelbase | 2630 | |
| Target Vertical Impact Reference Line Aft of Front Axle | 375 | Yes |
| Actual Impact Point Location (fore-aft, above – below) | +15 / -8 | Yes |

Note: Fore or above the target impact point is positive (+). Aft or below the target impact point is negative (-)

WEIGHT OF BALLAST AND VEHICLE COMPONENTS REMOVED TO MEET TVTW

| Component Description | Weight (kg) |
|-----------------------|-------------|
| Trunk carpeting | 5 |
| Spare tire & Jack | 18 |
| | |
| Ballast (if any) | 0 |


DATA SHEET NO. 3
SEAT AND SEAT BELT ANCHORAGE ADJUSTMENT DATA

Test Vehicle: 2023 Audi A3 Four Door Sedan
Test Facility: Calspan

NHTSA No.: C20235803
Test Date: 11/22/2022

SEAT BACK ANGLE ADJUSTMENT

The driver's seat back is positioned to the manufacturer's designated design angle. The front center and front passenger's seat backs are positioned in a similar manner as the driver's seat back. The struck side rear seat back is positioned such that the dummy's head is level. The rear center and non-struck side rear outboard seat backs are positioned in a similar manner as the struck-side rear seat back.



| Seat | Total Seat Back Angle Range | | Test Position from Most Upright | |
|----------------------------|-----------------------------|----------|---------------------------------|----------|
| | Degrees | Detents* | Degrees | Detents* |
| Driver Seat w/Seated Dummy | 58.6 | Power | 18.6 | Powered |
| Passenger w/Seated Dummy | 58.6 | Power | 18.5 | Powered |

SEAT POSITIONING

The driver's seat, front center seat (if applicable), and right front passenger's seat should be set to the mid-track, lowest, mid-angle position. The struck-side rear passenger's seat, rear center seat, and non-struck side rear passengers' seats should be set to the rear-most, lowest, mid-angle position.

SEAT HEIGHT AND ANGLE

| Seat | As Tested SCRL Angle (Mid) (°) | As Tested SCRP Height (mm) | SCRP Height Position | SCRP Height (mm) | | |
|----------------------|--------------------------------|----------------------------|----------------------|------------------|----------------|--------------|
| | | | | Rearmost | Mid-Fore / Aft | Forward-Most |
| Driver Seat | 19.5 | 13 | Max | 72 | 81 | 90 |
| | | | Mid | 37 | 47 | 56 |
| | | | Min | 3 | 13 | 22 |
| Front Passenger Seat | 20.7 | 15 | Max | 67 | 79 | 85 |
| | | | Mid | 35 | 47 | 54 |
| | | | Min | 3 | 15 | 22 |

SEAT FORE / AFT POSITION

| Seat | Total Fore / Aft Travel | | Test Position from Forward most Position | |
|----------------------|-------------------------|----------|--|----------|
| | mm | Detents* | mm | Detents* |
| Driver Seat | 246 | N/A | 123 | N/A |
| Front Passenger Seat | 246 | N/A | 123 | N/A |

SEAT BELT ANCHORAGE ADJUSTMENT

| Seat | Total # of Positions | Placed in Position # |
|---------------------|----------------------|----------------------|
| Driver Seat | 4 (0-3) | Uppermost |
| Rear Passenger Seat | Fixed | Fixed |

HEAD RESTRAINT ADJUSTMENT

| Seat | Total # of Positions | Placed in Position # |
|---------------------|----------------------|----------------------|
| Driver Seat | 4 (0-3) | Uppermost |
| Rear Passenger Seat | 2 (0-1) | Lowermost |

DATA SHEET NO. 4
FUEL SYSTEMS AND STEERING WHEEL POSITION DATA


Test Vehicle: 2023 Audi A3 Four Door Sedan
 Test Facility: Calspan

NHTSA No.: C20235803
 Test Date: 11/22/2022

STEERING COLUMN ADJUSTMENT

Steering wheel and column adjustments are made so that the steering wheel hub is at the center of its geometric locus it describes when it moves through its full range of motion.


| | Degrees | Fore / Aft Position (mm) |
|-----------------------------------|---------|--------------------------|
| Lowermost – Position 1 | 18.9 | |
| Geometric Center – Position 2 | 21.6 | |
| Uppermost – Position 3 | 24.2 | |
| Telescoping Steering Wheel Travel | | 64 |
| Test Position | 21.6 | 32 |

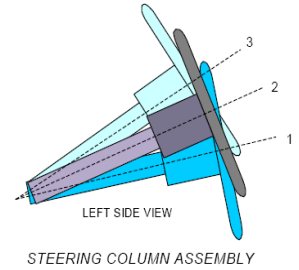

FUEL PUMP

Describe the fuel pump type, details about how it operates, and the location of the fuel filler neck.

The vehicle is equipped with an electric fuel pump.
The fuel filler neck is on the right side of the vehicle.
The pump creates positive pressure in the fuel lines, pushing the gasoline to the engine. See form 1 for more information.

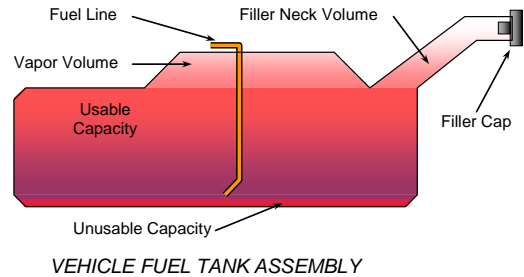


FUEL TANK CAPACITY DATA

| Description | Liters |
|---------------------------------------|---------|
| Usable Capacity - see Form No. 1 | 50 |
| Usable Capacity - see Owner's Manual | 50 |
| 92-94% of Usable Capacity | 46 – 47 |
| Actual Amount of Solvent Used in Test | 46.5 |

DATA SHEET NO. 5
DUMMY LONGITUDINAL CLEARANCE DIMENSIONS

Test Vehicle: 2023 Audi A3 Four Door Sedan
Test Facility: Calspan

NHTSA No.: C20235803
Test Date: 11/22/2022

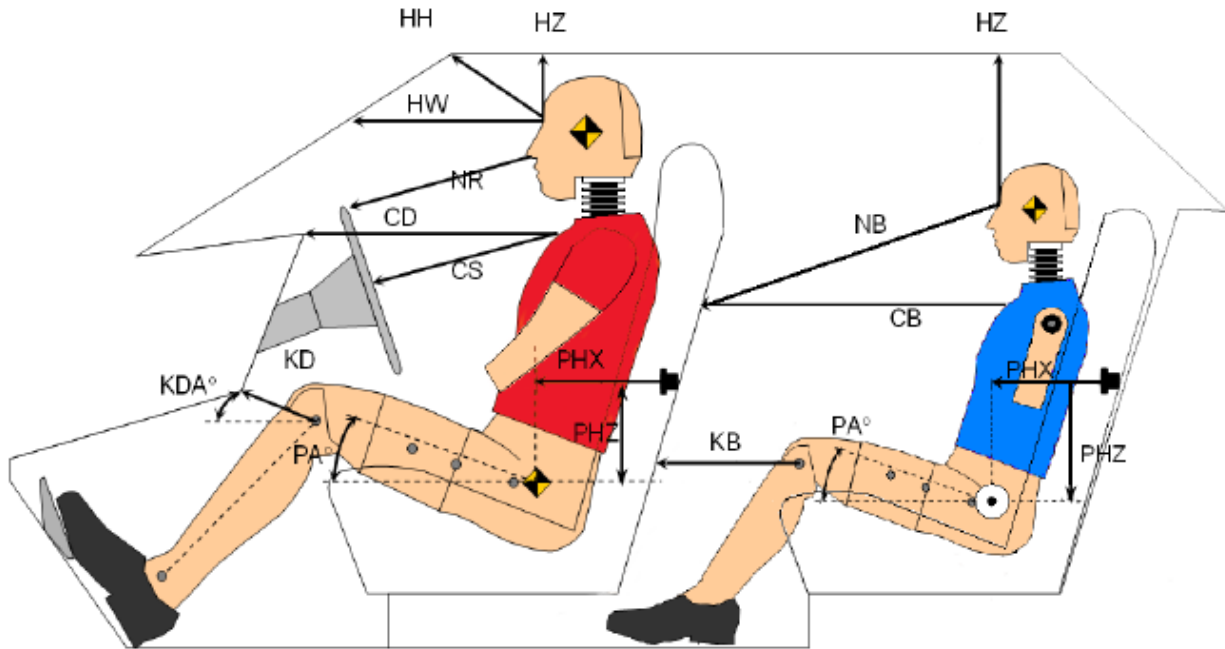


DUMMY LONGITUDINAL CLEARANCE DIMENSION INFORMATION

| Code | Pass. Code | Description | ES2-re | | SID-IIs | |
|---------------|---------------|-------------------------------|-------------|-------|-------------|-------|
| | | | Length (mm) | Angle | Length (mm) | Angle |
| HH | | Header to Header | 410 | | | |
| HW | | Header to Windshield | 598 | | | |
| HZ | HZ | Head to Roof Liner | 169 | | 249 | |
| NR | NB | Nose to Rim/Seat Back | 413 | | 483 | |
| CD | CB | Chest to Dash/Seat Back | 580 | | 504 | |
| CS | | Chest to Steering Wheel | 370 | | | |
| KD(L)/KDA(L)° | KB(L)/KBA(L)° | Left Knee to Dash/Seat Back | 243 | 36.4 | 232 | 16.5 |
| KD(R)/KDA(R)° | KB(R)/KBA(R)° | Right Knee to Dash/Seat Back | 249 | 31.5 | 212 | 15.5 |
| PA° | PA° | Pelvic Tilt Angle | | 0.8 | | 20.4 |
| PHX | PHX | Hip Point to Striker (X-Axis) | 118 | | 171 | |
| PHZ | PHZ | Hip Point to Striker (Z-Axis) | 254 | | 266 | |

**DATA SHEET NO. 6
DUMMY LATERAL CLEARANCE DIMENSIONS**

Test Vehicle: 2023 Audi A3 Four Door Sedan
 Test Facility: Calspan

NHTSA No.: C20235803
 Test Date: 11/22/2022

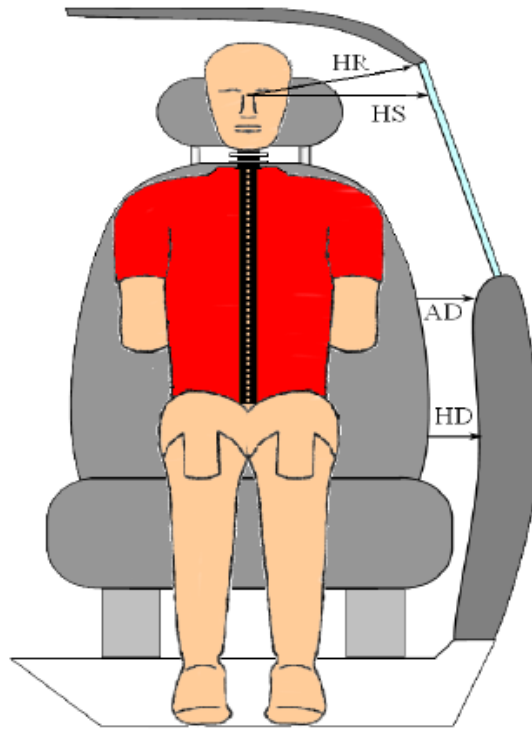

FRONT VIEW OF DUMMY


DUMMY LATERAL CLEARANCE DIMENSION INFORMATION

| Code | Measurement Description | Units | Front Occupant | Rear Occupant |
|------|-------------------------|-------|----------------|---------------|
| HR | Head To Side Header | mm | 207 | 215 |
| HS | Head to Side Window | mm | 330 | 350 |
| AD | Arm to Door | mm | 100 | 139 |
| HD | Hip Point to Door | mm | 165 | 180 |

**DATA SHEET NO. 7
LOCATION OF CAMERAS**

Test Vehicle: 2023 Audi A3 Four Door Sedan
 Test Facility: Calspan

NHTSA No.: C20235803
 Test Date: 11/22/2022

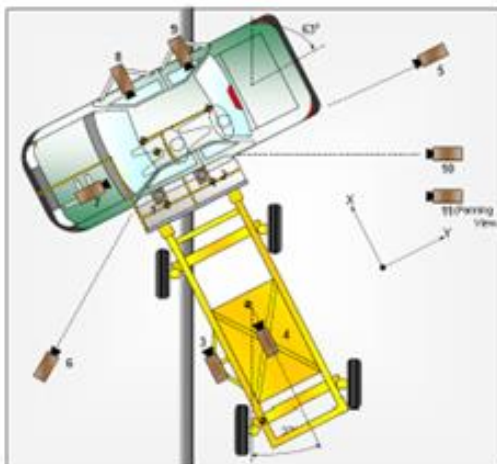

CAMERA LOCATIONS AND DATA


| No. | Camera View | Coordinates (mm) | | | Lens Length (mm) | Operating Frame Rate (fps) |
|-----|---------------------------------------|------------------|-------|-------|------------------|----------------------------|
| | | X | Y | Z | | |
| 1 | Overhead Overall | 0 | -390 | -8230 | 12.5 | 1000 |
| 2 | Overhead Close-up | 0 | 0 | -8380 | 24 | 1000 |
| 3 | Impact Point Close-up | | | | 25 | 1000 |
| 4 | Centerline of Impact (MDB) | | | | 8 | 1000 |
| 5 | Right Side View | -3235 | -5982 | -1419 | 24 | 1000 |
| 6 | Left Side View | 0 | 8771 | -1540 | 24 | 1000 |
| 7 | Front Seat Occupant-Frontal View (OB) | | | | 25 | 1000 |
| 8 | Front Seat Occupant-Side View (OB) | | | | 8 | 1000 |
| 9 | Rear Passenger-Side View (OB) | | | | 8 | 1000 |
| 10 | Real-time Coverage | | | | Zoom | 24 |

Notes: Reference: Impact Point projected to Ground
 +X = To Front of MDB, +Y = To Right of MDB, +Z = Down

**DATA SHEET NO. 8
TEST VEHICLE ACCELEROMETER LOCATIONS**

Test Vehicle: 2023 Audi A3 Four Door Sedan
 Test Facility: Calspan

NHTSA No.: C20235803
 Test Date: 11/22/2022

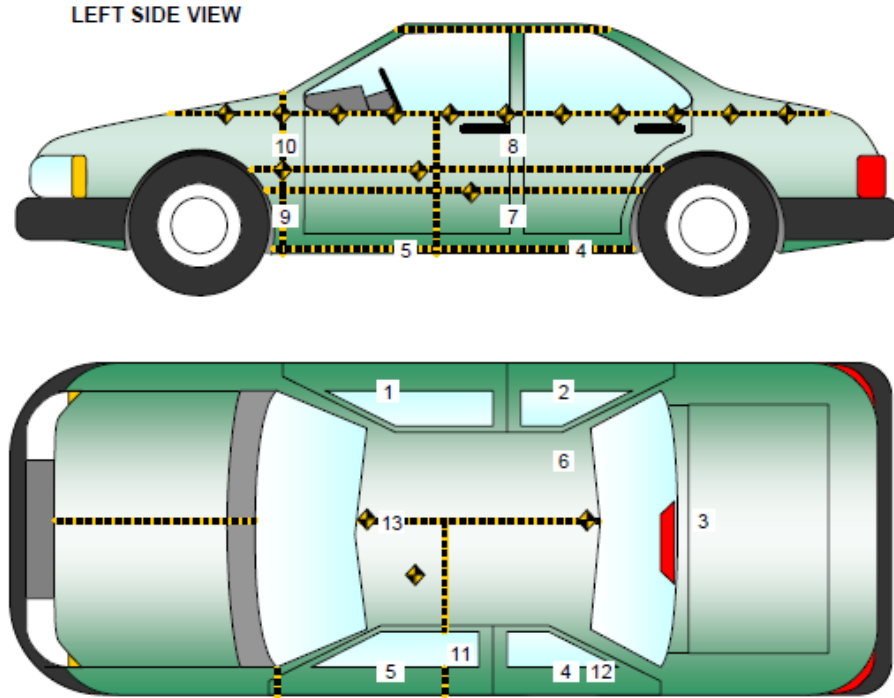

TEST VEHICLE ACCELEROMETER LOCATIONS

| No. | Accelerometer Location | Coordinates (mm) | | |
|-----|-------------------------------------|------------------|------|------|
| | | X | Y | Z |
| 1 | Left (or Rt.) Sill at Front Seat | 2674 | 660 | 71 |
| 2 | Left (or Rt.) Sill at Rear Seat | 1812 | 655 | 60 |
| 3 | Rear Floorpan Above Axle | 1130 | 9 | -79 |
| 4 | Right Sill at Rear Door | 1902 | -652 | 65 |
| 5 | Right Sill at Front Door | 2810 | -658 | 74 |
| 6 | Left (or Rt.) Rear Occ. Compartment | 1800 | 339 | 55 |
| 7 | Left (or Rt.) B-Post Lower | 2075 | -671 | -58 |
| 8 | Left (or Rt.) B-Post Middle | 2013 | -659 | -485 |
| 9 | Left (or Rt.) A-Post Lower | 3179 | -614 | -137 |
| 10 | Left (or Rt.) A-Post Middle | 3001 | -629 | -577 |
| 11 | Front Seat Track | 2361 | -586 | 93 |
| 12 | Rear Seat Track or Structure | 1797 | -353 | 46 |
| 13 | Vehicle CG | 1940 | -10 | 18 |

Reference: X – Rear surface of vehicle (+ forward)
 Y – Vehicle centerline (+ to right)
 Z – Ground plane (+ down)

DATA SHEET NO. 9
TEST VEHICLE ACCELEROMETER DATA SUMMARY

Test Vehicle: 2023 Audi A3 Four Door Sedan
Test Facility: Calspan


NHTSA No.: C20235803
Test Date: 11/22/2022

| Loc No. | Description | Axes | Units | Peak Values (g's) | | | |
|---------|-------------------------------------|-----------|-------|-------------------|-----------|---------|-----------|
| | | | | Max | Time (ms) | Min | Time (ms) |
| 1 | Left (or Rt.) Sill at Front Seat | X | g | 6.66 | 28.05 | -7.50 | 14.20 |
| | | Y | g | 21.77 | 7.05 | -3.06 | 120.20 |
| | | Z | g | 5.61 | 35.95 | -10.14 | 7.30 |
| | | Resultant | | 24.02 | 7.10 | 0.02 | -44.45 |
| 2 | Left (or Rt.) Sill at Rear Seat | X | g | 15.06 | 14.90 | -21.42 | 20.05 |
| | | Y | g | 23.64 | 7.05 | -3.93 | 87.25 |
| | | Z | g | 8.30 | 34.50 | -11.30 | 15.50 |
| | | Resultant | | 26.06 | 20.55 | 0.05 | -30.80 |
| 3 | Rear Floorpan Above Axle | X | g | 3.18 | 49.45 | -12.03 | 12.25 |
| | | Y | g | 24.10 | 26.65 | -2.42 | 85.50 |
| | | Z | g | 15.11 | 14.05 | -6.38 | 37.70 |
| | | Resultant | | 24.11 | 26.65 | 0.02 | -19.75 |
| 4 | Left (or Rt.) Sill at Rear Door | Y | g | 105.41 | 4.90 | -76.82 | 43.10 |
| 5 | Left (or Rt.) Sill at Front Door | Y | g | 62.74 | 4.05 | -50.92 | 44.30 |
| 6 | Left (or Rt.) Rear Occ. Compartment | Y | g | 23.30 | 26.05 | -2.49 | 121.20 |
| 7 | Left (or Rt.) B-Post Lower | Y | g | 146.39 | 4.60 | -39.30 | 14.95 |
| 8 | Left (or Rt.) B-Post Middle | Y | g | 130.31 | 15.20 | -136.42 | 12.25 |
| 9 | Left (or Rt.) A-Post Lower | Y | g | 79.39 | 21.30 | -78.46 | 16.10 |
| 10 | Left (or Rt.) A-Post Middle | Y | g | 50.22 | 21.55 | -41.50 | 25.05 |
| 11 | Front Seat Track | Y | g | 33.34 | 4.65 | -6.52 | 50.60 |
| 12 | Rear Seat Track or Structure | Y | g | 24.81 | 5.20 | -2.25 | 86.65 |
| 13 | Vehicle CG | X | g | 4.23 | 26.75 | -9.95 | 12.60 |
| | | Y | g | 23.29 | 6.05 | -3.46 | 87.35 |
| | | Z | g | 15.39 | 15.40 | -7.76 | 68.60 |
| | | Resultant | | 23.97 | 27.05 | 0.02 | -31.65 |

DATA SHEET NO. 10
MDB ACCELEROMETER LOCATION DATA SUMMARY

Test Vehicle: 2023 Audi A3 Four Door Sedan
 Test Facility: Calspan

NHTSA No.: C20235803
 Test Date: 11/22/2022

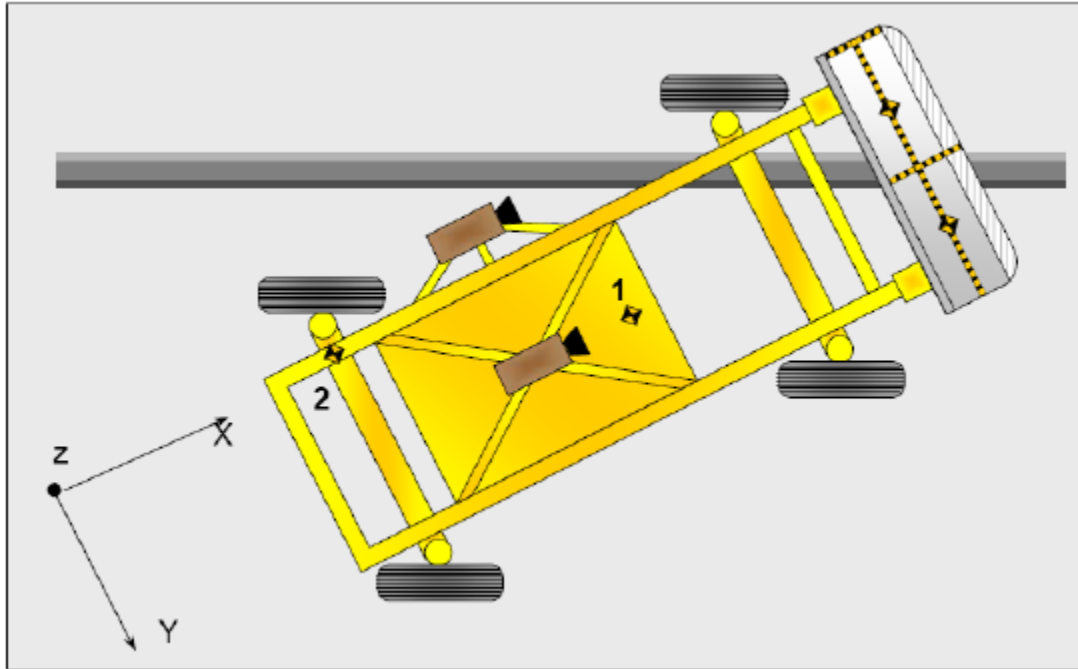

| Loc No. | Description | Axes | Units | Peak Values (g's) | | | |
|---------|-------------|-----------|-------|-------------------|-----------|--------|-----------|
| | | | | Max | Time (ms) | Min | Time (ms) |
| 1 | MDB CG | X | g | 4.44 | 300.00 | -21.47 | 43.90 |
| | | Y | g | 1.79 | 57.45 | -7.46 | 14.75 |
| | | Z | g | 17.75 | 29.55 | -9.66 | 23.30 |
| | | Resultant | | 26.02 | 29.50 | 0.04 | -36.75 |
| 2 | MDB Rear | X | g | 1.77 | 119.30 | -22.80 | 26.80 |
| | | Y | g | 5.13 | 22.65 | -3.49 | 55.80 |

**DATA SHEET NO. 11
MDB SUMMARY OF RESULTS**

Test Vehicle: 2023 Audi A3 Four Door Sedan
 Test Facility: Calspan

NHTSA No.: C20235803
 Test Date: 11/22/2022

MDB SPECIFICATIONS

| Measurement Description | Requirement | Value |
|--|-----------------|-------|
| Overall Width of Framework Carriage | 1241 – 1261 | 1250 |
| Overall Length Including Honeycomb Frame | 4140 – 3990 | 4120 |
| Wheelbase of Framework Carriage | 2566 – 2616 | 2600 |
| CG Location Aft of Front Axle | | 1120 |
| MDB Front Axle Weight | | 764 |
| MDB Rear Axle Weight | | 594 |
| MDB Total Weight | 1356.5 – 1365.5 | 1358 |

SPEED AND ANGLE AT IMPACT DATA

| Measured Parameter | Units | Requirement | Value |
|---------------------------------|---------|----------------|-------|
| Trap No. 1 Velocity (Primary) | km/h | 52.10 to 53.70 | 52.80 |
| Trap No. 2 Velocity (Redundant) | km/h | 52.10 to 53.70 | 52.89 |
| MDB CL to Target Vehicle CL | degrees | 88.5 to 91.5 | 90.0 |

MAXIMUM STATIC CRUSH OF HONEYCOMB IMPACT FACE

| Vertical Location | | | From Centerline | | Maximum Crush (mm) |
|-------------------|------------------|-------------|-----------------|-----------|--------------------|
| Row | Description | Height (mm) | Distance (mm) | Direction | |
| A | Center of Bumper | 430 | 700 | Left | 167 |
| B | Top of Bumper | 542 | 800 | Left | 67 |
| C | Mid-Level | 682 | 800 | Left | 91 |
| D | Top of Stack | 811 | 800 | Left | 131 |

IMPACT POINT LOCATION DATA

| Measured Parameter | Units | Tolerance | Value |
|--|-------|---------------------------------|-------|
| Horizontal Offset (+ forward / - rearward) | mm | +/- 50 of Intended Impact Point | +15 |
| Vertical Offset (- down / + up) | mm | +/- 20 of Intended Impact Point | -8 |

DATA SHEET NO. 12
DUMMY INJURY RESPONSE DATA
(Subpart U, ES-2re)

Test Vehicle: 2023 Audi A3 Four Door Sedan
 Test Facility: Calspan

NHTSA No.: C20235803
 Test Date: 11/22/2022

Dummy Serial No. D037

| Description | Axes | Positive Direction | | Negative Direction | |
|-------------------------------|------|--------------------|-----------|--------------------|------------|
| | | MAX | TIME (ms) | MAX | TIME (ms) |
| HEAD ACCELERATION (g) | | | | | |
| Longitudinal | X | 6.39 | 132.50 | -13.86 | 42.55 |
| Lateral | Y | 36.32 | 39.90 | -3.72 | 265.55 |
| Vertical | Z | 12.02 | 37.15 | -3.87 | 61.95 |
| Resultant | N/A | 38.66 | 39.90 | | |
| HIC36 (t1, t2) | N/A | 109.23 | | t1 = 34.50 | t2 = 62.65 |
| THORAX DEFLECTION (mm) | | | | | |
| Upper Rib | Y | 12.78 | 47.60 | -5.29 | 72.10 |
| Middle Rib | Y | 13.52 | 45.60 | -5.16 | 67.75 |
| Lower Rib | Y | 16.24 | 44.45 | -1.83 | 70.95 |
| ABDOMINAL FORCES (N) | | | | | |
| Front | Y | 161.32 | 25.40 | -19.21 | 14.20 |
| Middle | Y | 216.02 | 35.30 | -8.25 | 102.05 |
| Rear | Y | 306.69 | 42.60 | -3.51 | 246.30 |
| SUM | N/A | 602.13 | 33.80 | | |
| PELVIS FORCES (N) | | | | | |
| Pubic Symphysis | Y | 68.63 | 176.15 | -1367.94 | 49.85 |

Reference: Positive Direction - Longitudinal (X) = forward
 - Lateral (Y) = to right
 - Vertical (Z) = down

**DATA SHEET NO. 14
POST-TEST OBSERVATIONS**

Test Vehicle: 2023 Audi A3 Four Door Sedan
 Test Facility: Calspan

NHTSA No.: C20235803
 Test Date: 11/22/2022

TEST DUMMY INFORMATION AND CONTACT POINTS

| Dummy Body Part | Front Occupant | Rear Occupant |
|---------------------|--------------------------------------|---|
| Head Contact | Curtain Airbag, Headliner & Headrest | Curtain Airbag, Headliner, center seat headrest |
| Upper Torso Contact | Curtain Airbag & Headliner | Seatback & Torso Pelvis Airbag |
| Lower Torso Contact | Pelvis/Torso Airbag & Seatback | Seatback |
| Left Knee Contact | Driver Door | Passenger Door |
| Right Knee Contact | Left Knee | Left Knee |

POST-TEST DOOR PERFORMANCE

| Description | Front | Rear |
|-----------------------|----------------------|----------------------------|
| Left Side Doors | Jammed Shut | Jammed Shut |
| Right Side Doors | Closed & Operational | Closed & Operational |
| Hatch and Other Doors | N/A | Hatch Opened during impact |
| Seat Movement | None | None |
| Seatback Failure | No | No |

*Note: Description for door opening must be specific with the following three categories: Remained closed and operational, opened/unlatched during the crash, or jammed shut. Sometimes the door is jammed and unlatched. If the door cannot be opened, then note the door as jammed shut. If open, measurement must be taken for the width of the door opening (mm).

POST-TEST STRUCTURAL OBSERVATIONS

| Critical Areas of Performance | Observations and Conclusions |
|-------------------------------|---|
| Pillar Performance | B-Pillar Buckled |
| Sill Separation | None |
| Windshield Damage | None |
| Side Window Damage | Both impact side windows shattered |
| Other Notable Effects | Trunk opened upon impact and inspection of the latch mechanism revealed that the mechanism was intact and did not fail during impact. |


SUPPLEMENTAL RESTRAINT SYSTEM INFORMATION

| Restraint Type | Front Occupant | | Rear Occupant | |
|------------------------|----------------|----------|---------------|----------|
| | Installed | Deployed | Installed | Deployed |
| Frontal Airbag | Yes | No | No | N/A |
| Side Torso Airbag | Yes | Yes | Yes | Yes |
| Head Airbag | No | N/A | No | N/A |
| Curtain Airbag | Yes | Yes | Yes | Yes |
| Seat Belt Pretensioner | Yes | Yes | Yes | Yes |
| Other | | | | |

DATA SHEET NO. 15
VEHICLE PRE TEST AND POST TEST MEASUREMENTS

Test Vehicle: 2023 Audi A3 Four Door Sedan
 Test Facility: Calspan

NHTSA No.: C20235803
 Test Date: 11/22/2022

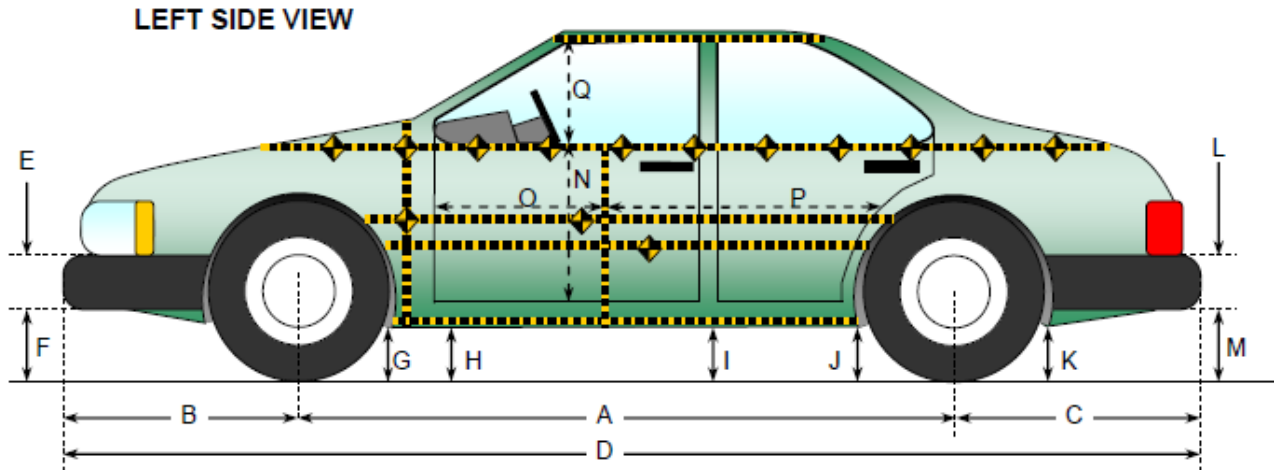


VEHICLE PRE- AND POST-TEST MEASUREMENT INFORMATION

| Code | Description | Pre-Test | Post-Test | Difference |
|------|--|----------|-----------|------------|
| A | Vehicle Wheelbase | 2630 | 2628 | -1 |
| B | Front Axle to FSOV | 906 | 905 | -1 |
| C | Rear Axle to RSOV | 961 | 961 | 0 |
| D | Total Length at Centerline | 4498 | 4494 | -3 |
| E | Front Bumper Thickness | 138 | 138 | 0 |
| F | Front Bumper Bottom to Ground | 403 | 402 | -1 |
| G | Sill Height at Front Wheel Well | 200 | 208 | 8 |
| H | Sill Height at Front Door Leading Edge | 208 | 216 | 8 |
| I | Sill Height at B-Pillar | 214 | 210 | -4 |
| J1 | Sill Height at Rear Wheel Well | 215 | 221 | 6 |
| J2 | Pinch Weld Height at Rear Wheel Well | 190 | 192 | 2 |
| K | Sill Height Aft of Rear Wheel Well | 221 | 235 | 14 |
| L | Rear Bumper Thickness | 191 | 191 | 0 |
| M | Rear Bumper Bottom to Ground | 385 | 398 | 13 |
| N | Sill Height to Bottom of Front Window Sill | 744 | 766 | 22 |
| O | Front Door Leading Edge to Impact CL | 726 | 721 | -5 |
| P | Rear Door Trailing Edge to Impact CL | 1305 | 1262 | -44 |
| Q | Front Window Opening | 405 | 398 | -7 |
| R | Right Side Length | 4406 | 4400 | -7 |
| S | Left Side Length | 4403 | 4405 | 1 |
| T | Vehicle Width at B-Pillars | 1790 | 1680 | -111 |

DATA SHEET NO. 16
TEST VEHICLE EXTERIOR CRUSH MEASUREMENTS

Test Vehicle: 2023 Audi A3 Four Door Sedan
 Test Facility: Calspan

NHTSA No.: C20235803
 Test Date: 11/22/2022

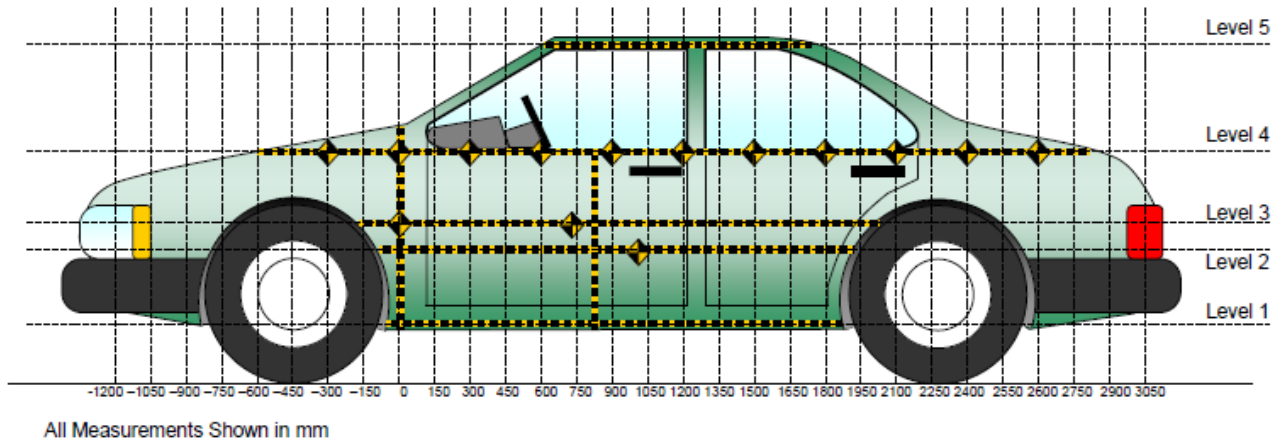

MAXIMUM EXTERIOR CRUSH MEASUREMENTS

| Level | Measurement Description | Units | Height Above Ground | Maximum Exterior Static Crush | Distance from Impact |
|-------|-------------------------|-------|---------------------|-------------------------------|----------------------|
| 1 | Sill Top | mm | 309 | 66 | 1050 |
| 2 | Occupant Hip Point | mm | 490 | 157 | 1650 |
| 3 | Mid - Door | mm | 643 | 149 | 750 |
| 4 | Window Sill | mm | 921 | 99 | 1650 |
| 5 | Window Top | mm | 1377 | 3 | 1350 |

NOTE: The above measurements should be taken along the vertical impact reference line. Vehicle measurements forward of the vertical impact reference line are negative.

DATA SHEET NO. 17
VEHICLE EXTERIOR CRUSH PROFILES

Test Vehicle: 2023 Audi A3 Four Door Sedan
Test Facility: Calspan

NHTSA No.: C20235803
Test Date: 11/22/2022

EXTERIOR CRUSH MEASUREMENTS AT EACH LEVEL


| | Pre-Test | | | | | Post-Test | | | | | Difference | | | | |
|------|----------|-----|-----|-----|-----|-----------|-----|-----|-----|-----|------------|-----|-----|-----|---|
| | 1 | 2 | 3 | 4 | 5 | 1 | 2 | 3 | 4 | 5 | 1 | 2 | 3 | 4 | 5 |
| -900 | | | | | | | | | | | | | | | |
| -750 | | | | | | | | | | | | | | | |
| -600 | | | | | | | | | | | | | | | |
| -450 | | | | | | | | | | | | | | | |
| -300 | | | | 713 | | | | | 715 | | | | | -2 | |
| -150 | | | 897 | 747 | | | | 907 | 748 | | | | -10 | -1 | |
| 0 | 869 | 890 | 890 | 773 | | 872 | 878 | 863 | 765 | | -3 | 12 | 27 | 8 | |
| 150 | 869 | 882 | 889 | 786 | | 825 | 756 | 781 | 780 | | 44 | 126 | 108 | 6 | |
| 300 | 871 | 871 | 881 | 800 | | 815 | 720 | 754 | 773 | | 56 | 151 | 127 | 27 | |
| 450 | 873 | 859 | 872 | 816 | | 815 | 715 | 742 | 782 | | 58 | 144 | 130 | 34 | |
| 600 | 874 | 856 | 871 | 830 | | 817 | 714 | 724 | 793 | | 57 | 142 | 147 | 37 | |
| 750 | 874 | 859 | 871 | 841 | 540 | 818 | 720 | 722 | 799 | 538 | 56 | 139 | 149 | 42 | 2 |
| 900 | 873 | 863 | 871 | 850 | 572 | 818 | 729 | 742 | 808 | 572 | 55 | 134 | 129 | 42 | 0 |
| 1050 | 871 | 868 | 870 | 855 | 580 | 805 | 736 | 764 | 814 | 578 | 66 | 132 | 106 | 41 | 2 |
| 1200 | 868 | 871 | 869 | 857 | 578 | 804 | 750 | 771 | 809 | 577 | 64 | 121 | 98 | 48 | 1 |
| 1350 | 865 | 873 | 865 | 858 | 576 | 817 | 723 | 753 | 789 | 573 | 48 | 150 | 112 | 69 | 3 |
| 1500 | 860 | 875 | 862 | 857 | 569 | 820 | 728 | 744 | 776 | 567 | 40 | 147 | 118 | 81 | 2 |
| 1650 | 855 | 874 | 865 | 852 | 558 | 814 | 717 | 718 | 753 | 556 | 41 | 157 | 147 | 99 | 2 |
| 1800 | 856 | 876 | 876 | 846 | 532 | 840 | 818 | 765 | 773 | 530 | 16 | 58 | 111 | 73 | 2 |
| 1950 | | | 886 | 838 | | | | 875 | 813 | | | | 11 | 25 | |
| 2100 | | | | 829 | | | | | 840 | | | | | -11 | |
| 2250 | | | | 815 | | | | | 807 | | | | | 8 | |
| 2400 | | | | 799 | | | | | 794 | | | | | 5 | |
| 2550 | | | | 781 | | | | | 779 | | | | | 2 | |
| 2700 | | | | 761 | | | | | 760 | | | | | 1 | |
| 2850 | | | | | | | | | | | | | | | |
| 3000 | | | | | | | | | | | | | | | |

NOTE: Pre-test measurements are taken when the vehicle is in the "As Tested" weight condition.
Vehicle measurements forward of the vertical impact reference line are negative.
The crush profile grid is established prior to test based on an estimated impact point.

DATA SHEET NO. 17
TEST VEHICLE EXTERIOR CRUSH PROFILES (CONTINUED)

Test Vehicle: 2023 Audi A3 Four Door Sedan
 Test Facility: Calspan

NHTSA No.: C20235803
 Test Date: 11/22/2022

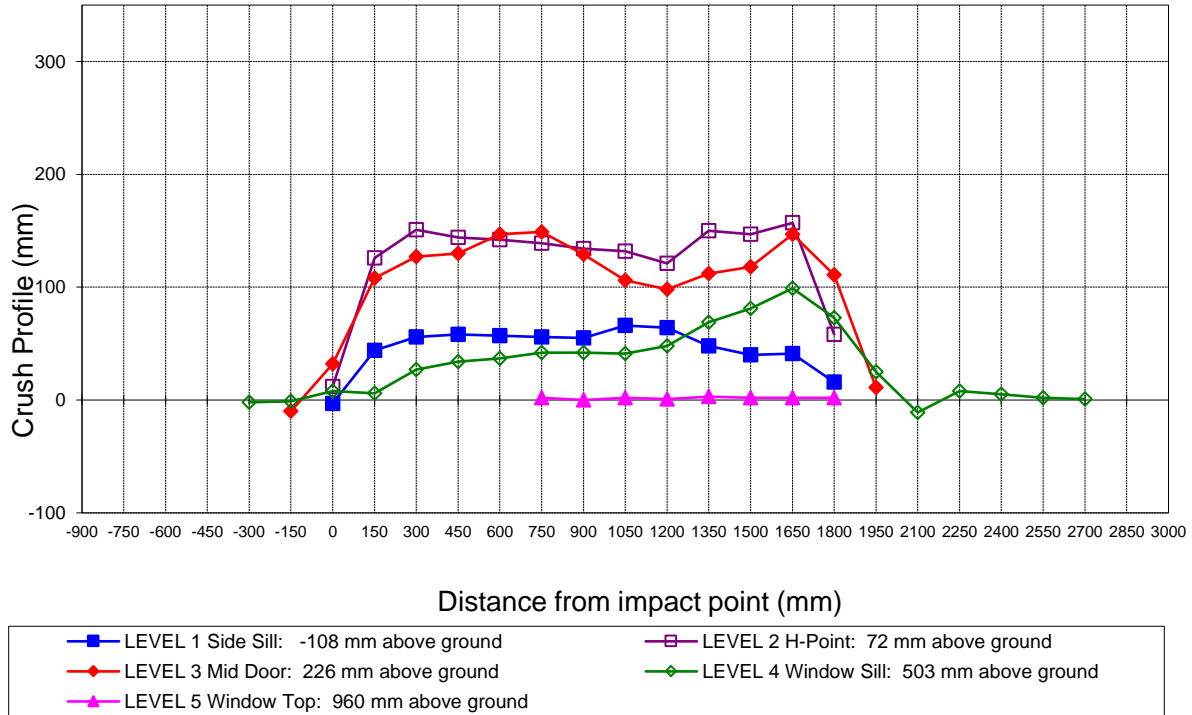


Vehicle Exterior Crush Measurements - Visual Representation

DATA SHEET NO. 18
EXTERIOR STATIC CRUSH FOR IMPACT FACE

Test Vehicle: 2023 Audi A3 Four Door Sedan
 Test Facility: Calspan

NHTSA No.: C20235803
 Test Date: 11/22/2022

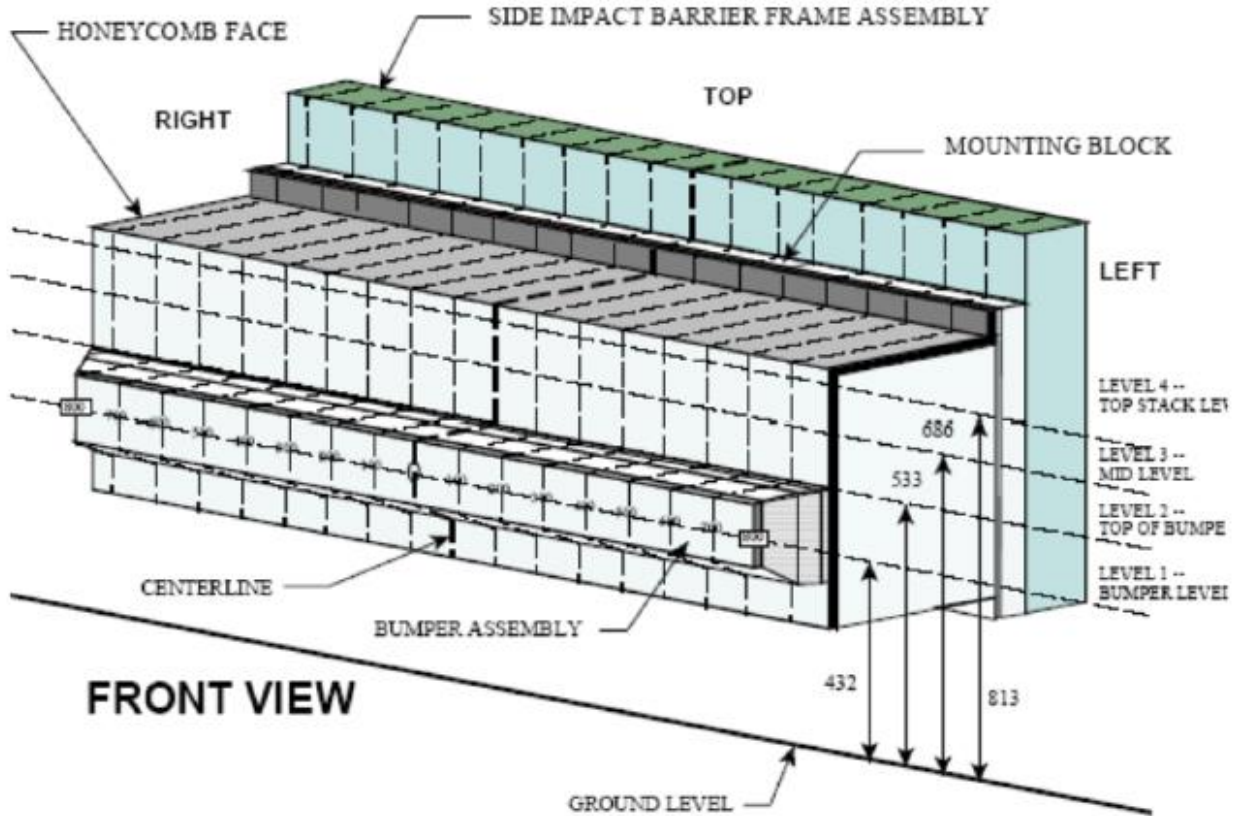

NOTE: Dimensions are shown in millimeters, mm

DEFORMABLE BARRIER STATIC CRUSH


| Stack Level | Distance Right of Center | | | | | | | | C/L | Distance Left of Center | | | | | | | |
|-------------|--------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-------------------------|-----|-----|-----|-----|-----|-----|-----|
| | 800 | 700 | 600 | 500 | 400 | 300 | 200 | 100 | | 0 | 100 | 200 | 300 | 400 | 500 | 600 | 700 |
| 1 | 127 | 132 | 131 | 134 | 140 | 152 | 132 | 126 | 124 | 124 | 124 | 125 | 125 | 126 | 135 | 167 | 155 |
| 2 | 53 | 53 | 56 | 59 | 63 | 60 | 57 | 57 | 47 | 44 | 46 | 45 | 48 | 49 | 52 | 65 | 67 |
| 3 | -5 | -5 | 5 | 12 | 33 | 61 | 52 | 30 | 16 | 13 | 14 | 16 | 19 | 25 | 42 | 79 | 91 |
| 4 | -10 | -9 | 5 | 21 | 52 | 89 | 80 | 71 | 42 | 34 | 31 | 31 | 36 | 48 | 71 | 105 | 131 |

Reference:
 +X = Forward
 +Y = To Right
 +Z = Down

DATA SHEET NO. 19
DUMMY / VEHICLE TEMPERATURE AND HUMIDITY STABILIZATION DATA

Test Vehicle: 2023 Audi A3 Four Door Sedan
Test Facility: Calspan

NHTSA No.: C20235803
Test Date: 11/22/2022

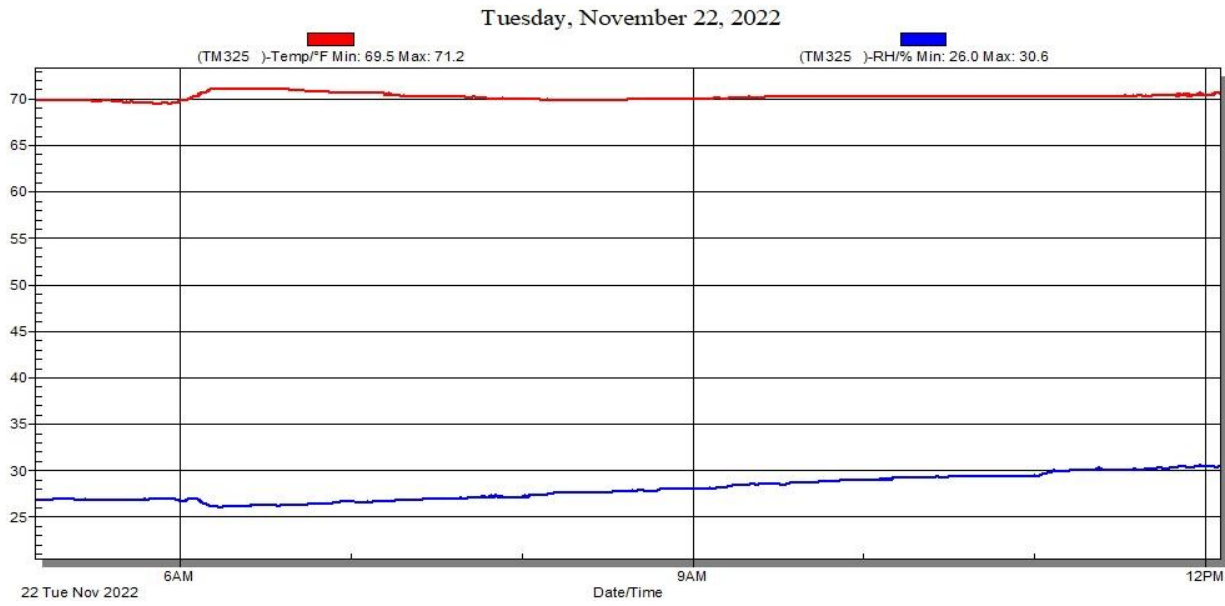

Temperature and Humidity Stabilization Chart / Data for Dummies and Test Vehicle

APPENDIX I
PHOTOGRAPHS

Note: Several photographs depict placards that include the word "NCAP" (New Car Assessment Program). This Side MDB test was conducted to evaluate compliance to FMVSS No. 214, S7.2. Disregard the error.

TABLE OF PHOTOGRAPHS

| Fig. | Description | Page |
|------|---|------|
| 1 | Pre-Test Frontal View of Test Vehicle | A-3 |
| 2 | Post Test Frontal View of Test Vehicle | A-3 |
| 3 | Pre-Test Rear View of Test Vehicle | A-4 |
| 4 | Post-Test Rear View of Test Vehicle | A-4 |
| 5 | Pre-Test Impacted Side View of Test Vehicle | A-5 |
| 6 | Post-Test Impacted Side View of Test Vehicle | A-5 |
| 7 | Pre-Test Frontal View of Impactor Face | A-6 |
| 8 | Post-Test Frontal View of Impactor Face | A-6 |
| 9 | Pre-Test Left Side View of Impactor Face | A-7 |
| 10 | Post-Test Left Side View of Impactor Face | A-7 |
| 11 | Pre-Test Right Side View of Impactor Face | A-8 |
| 12 | Post-Test Right Side View of Impactor Face | A-8 |
| 13 | Pre-Test Top View of Impactor Face | A-9 |
| 14 | Post-Test Top View of Impactor Face | A-9 |
| 15 | Pre-Test Overhead View of MDB Positioned Against Impact Side of Test Vehicle at Impact Location | A-10 |
| 16 | Post-Test Overhead View of the MDB and Test Vehicle | A-10 |
| 17 | Pre-Test Front ES2-re in Final Seating Position (Door Open) | A-11 |
| 18 | Pre-Test Front ES2-re in Final Seating Position (Door Closed) | A-11 |
| 19 | Pre-Test Front ES2-re – Opposite Side View | A-12 |
| 20 | Post-Test Front ES2-re – Opposite Side View | A-12 |
| 21 | Pre-Test Rear SID in Final Seating Position (Door Open) | A-13 |
| 22 | Pre-Test Rear SID in Final Seating Position (Door Closed) | A-13 |
| 23 | Pre-Test Rear SID – Opposite Side View | A-14 |
| 24 | Post-Test Rear SID – Opposite Side View | A-14 |
| 25 | T (0) – Impact Event | A-15 |
| 26 | Post-Test Close-up View of Impact Point Target | A-15 |
| 27 | Close-up View of Vehicle’s Certification Label | A-16 |
| 28 | Post-Test Front Seat Occupant Area Showing Head & Torso Contact Regions | A-16 |
| 29 | Post-Test Rear Seat Occupant Area Showing Head & Torso Contact Regions | A-17 |
| 30 | Close-up View of Vehicle’s Tire Placard | A-17 |

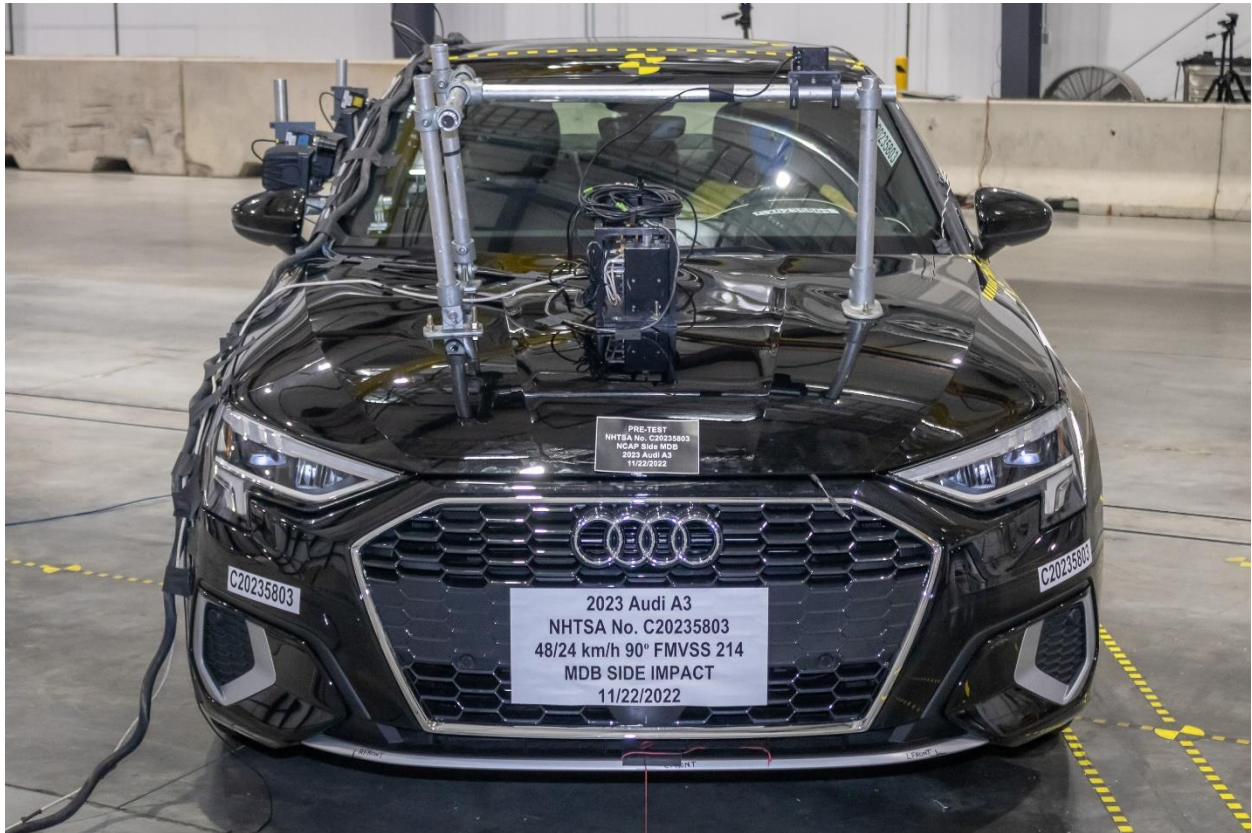


Figure A-1: Pre-Test Frontal View of Test Vehicle



Figure A-2: Post-Test Frontal View of Test Vehicle



Figure A-3: Pre-Test Rear View of Test Vehicle



Figure A-4: Post-Test Rear View of Test Vehicle

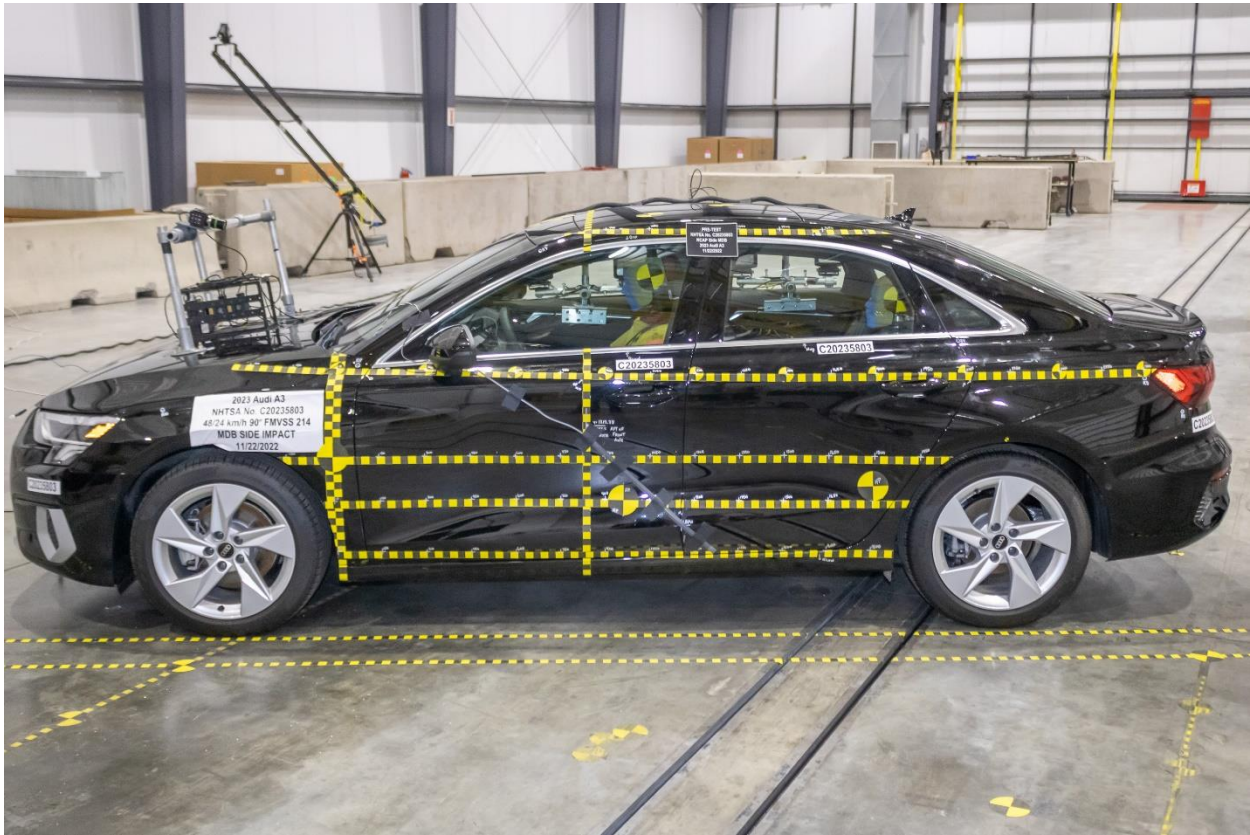


Figure A-5: Pre-Test Impacted Side View of Test Vehicle



Figure A-6: Post-Test Impacted Side View of Test Vehicle



Figure A-7: Pre-Test Frontal View of Impactor Face



Figure A-8: Post-Test Frontal View of Impactor Face



Figure A-9: Pre-Test Left Side View of Impactor Face



Figure A-10: Post-Test Left Side View of Impactor Face



Figure A-11: Pre-Test Right Side View of Impactor Face



Figure A-12: Post-Test Right Side View of Impactor Face



Figure A-13: Pre-Test Top View of Impactor Face



Figure A-14: Post-Test Top View of Impactor Face

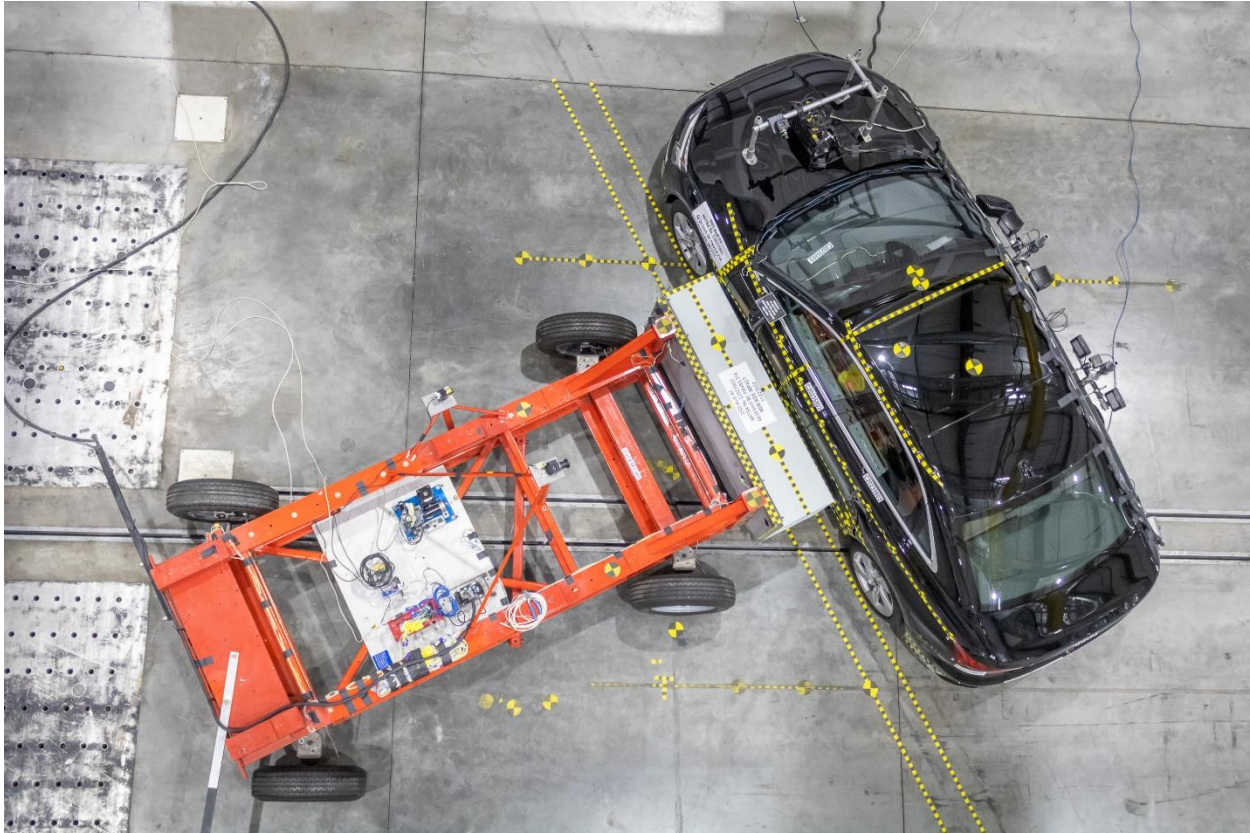


Figure A-15: Pre-Test Overhead View of MDB Positioned Against Impact Side of Test Vehicle at Impact Location

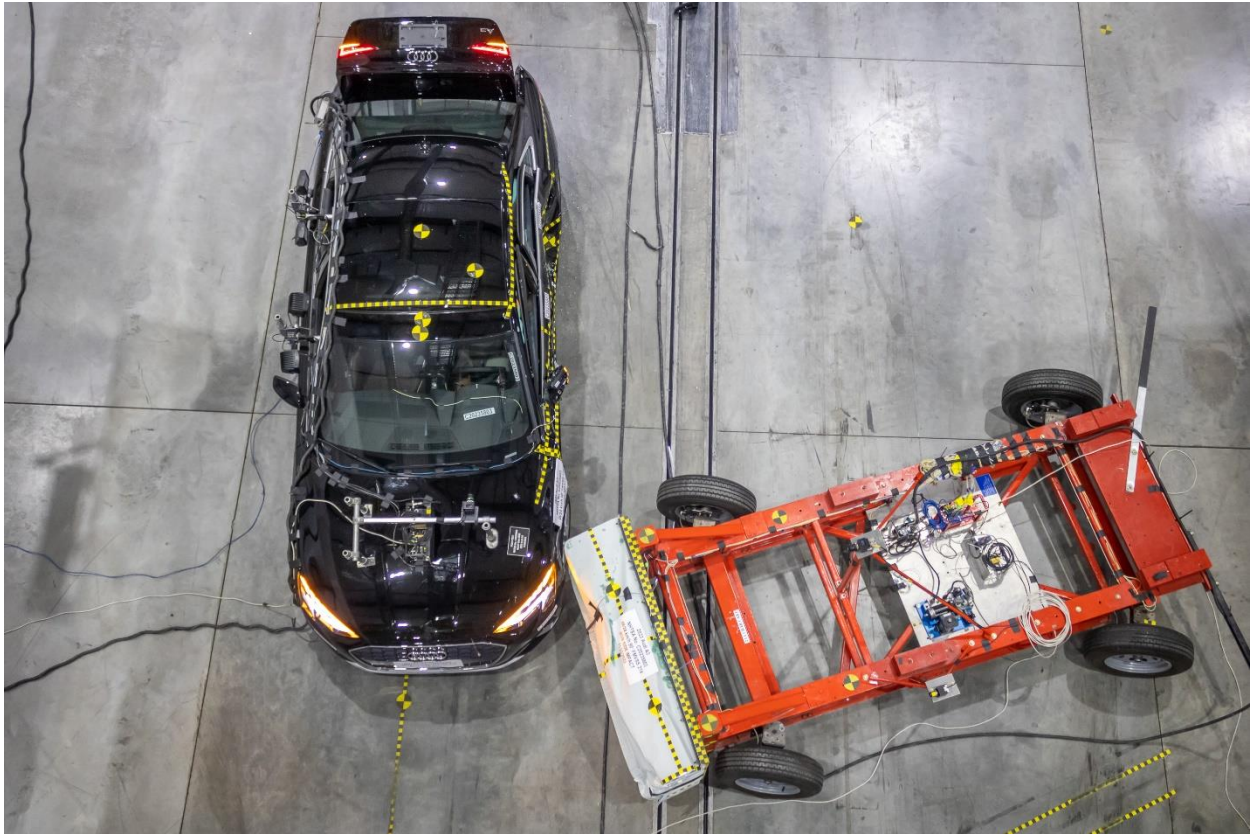


Figure A-16: Post-Test Overhead View of the MDB and Test Vehicle



Figure A-17: Pre-Test Front ES2-re – Final Seating Position (Door Open)



Figure A-18: Pre-Test Front ES2-re – Final Seating Position (Door Closed)



Figure A-19: Pre -Test Front ES2-re – Opposite Side View



Figure A-20: Post-Test Front ES2-re – Opposite Side View



Figure A-21: Pre-Test Rear SID – Final Seating Position (Door Open)

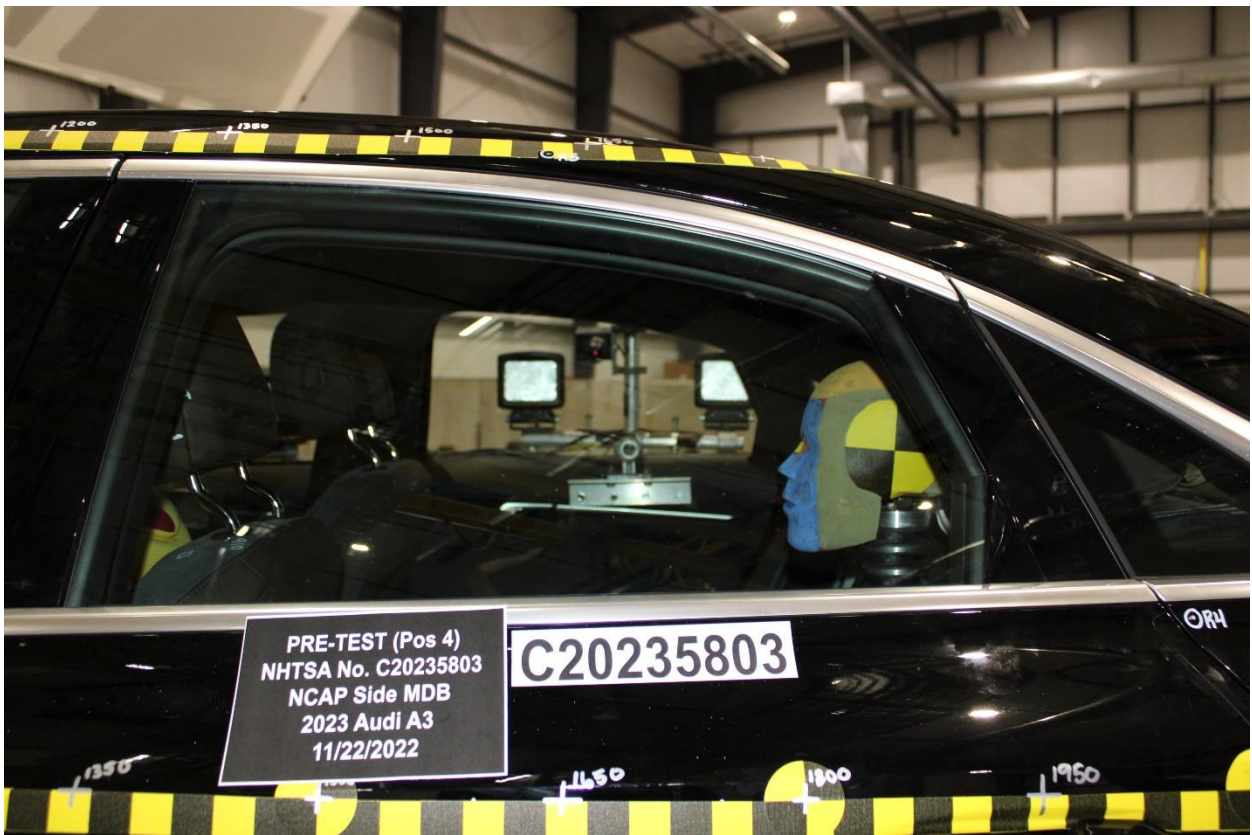


Figure A-22: Pre-Test Rear SID – Final Seating Position (Door Closed)



Figure A-23: Pre-Test Rear SID – Opposite Side View



Figure A-24: Post-Test Rear SID – Opposite Side View



Figure A-25: T(0) Impact Event



Figure A-26: Close-Up View of Impact Point Target

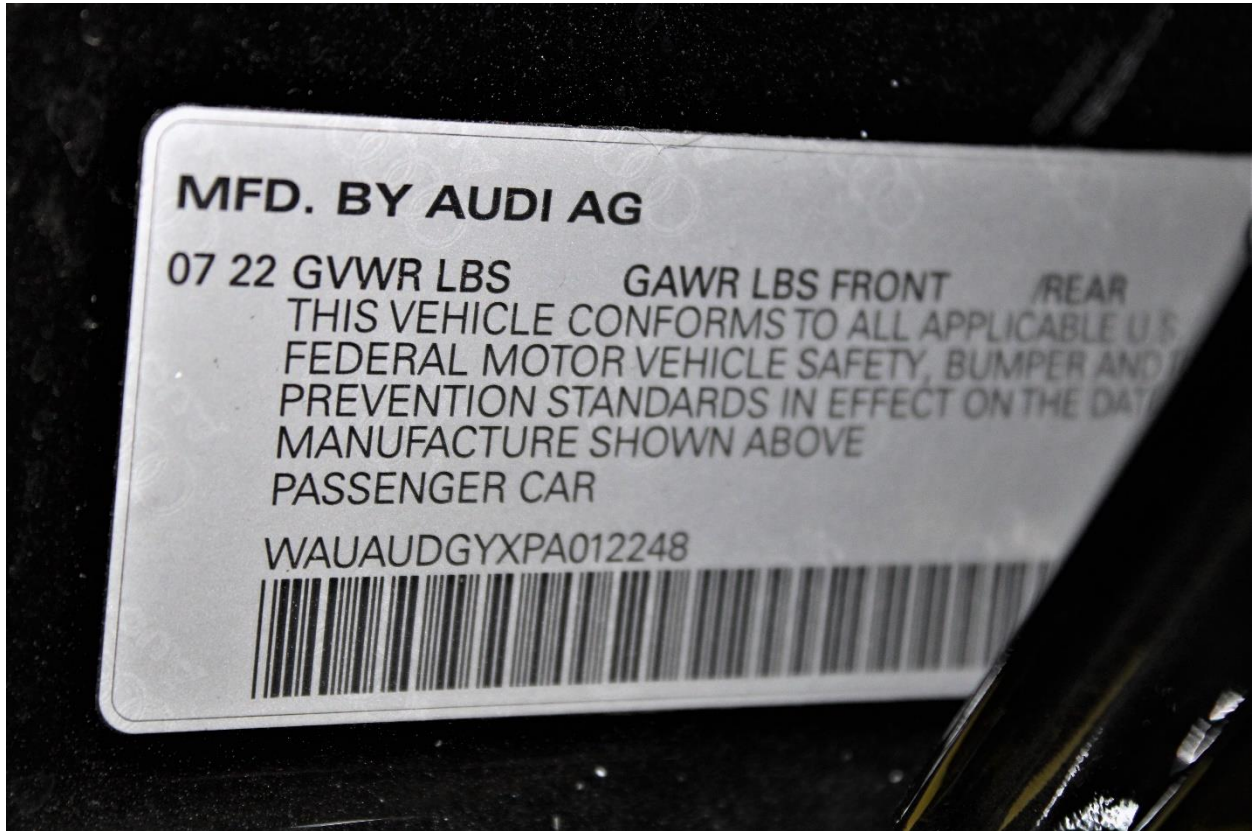


Figure A-27: Close-Up View of Vehicle's Certification Label
(No Data Provided for GVWR, Front & Rear)



Figure A-28: Post-Test Front Seat Occupant Area Showing Head & Torso contact regions



Figure A-29: Post-Test Rear Seat Occupant Area Showing Head & Torso contact regions

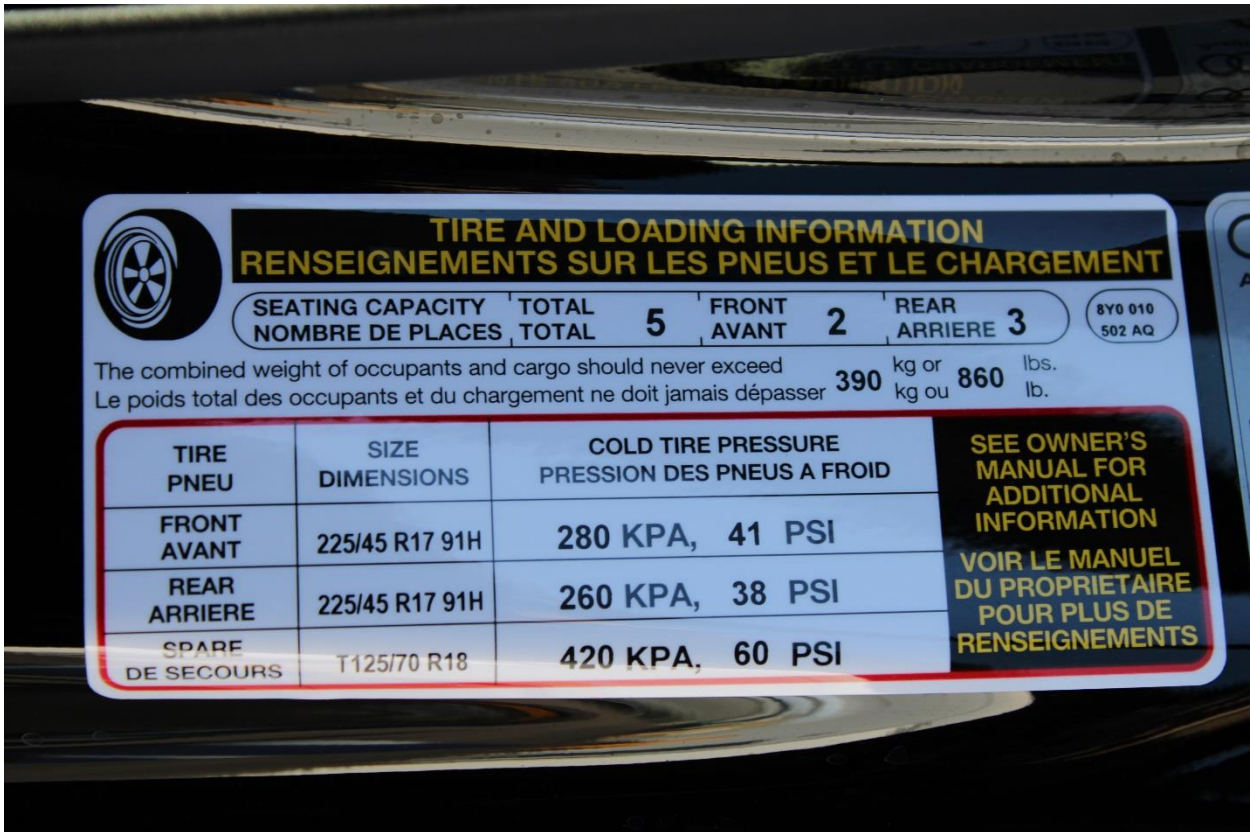



Figure A-30: Close-Up View of Vehicle's Tire Label

APPENDIX II
ES-2re DUMMY RESPONSE DATA TRACES


Table of Data Plots

| No. | Description | Page |
|-----|---|------|
| 1 | ES-2re Head (X) Acceleration vs. Time | II-3 |
| 2 | ES-2re Head (Y) Acceleration vs. Time | II-3 |
| 3 | ES-2re Head (Z) Acceleration vs. Time | II-3 |
| 4 | ES-2re Head Resultant Acceleration vs. Time | II-3 |
| 5 | Driver Head CG X Velocity | II-4 |
| 6 | Driver Head CG Y Velocity | II-4 |
| 7 | Driver Head CG Z Velocity | II-4 |
| 8 | ES-2re Upper Thorax Rib Deflection Rate vs. Time | II-4 |
| 9 | ES-2re Upper Thorax Rib Deflection (Y) vs. Time | II-5 |
| 10 | ES-2re Middle Thorax Rib Deflection Rate vs. Time | II-5 |
| 11 | ES-2re Middle Thorax Rib Deflection (Y) vs. Time | II-5 |
| 12 | ES-2re Lower Thorax Rib Deflection Rate vs. Time | II-5 |
| 13 | ES-2re Lower Thorax Rib Deflection (Y) vs. Time | II-6 |
| 14 | ES-2re Front Abdomen Force (Y) vs. Time | II-6 |
| 15 | ES-2re Middle Abdomen Force (Y) vs. Time | II-6 |
| 16 | ES-2re Rear Abdomen Force (Y) vs. Time | II-6 |
| 17 | ES-2re Sum of Abdomen Forces vs. Time | II-7 |
| 18 | ES-2re Pubic Symphysis Force (Y) vs. Time | II-7 |


ES-2re Head (X) Acceleration vs. Time

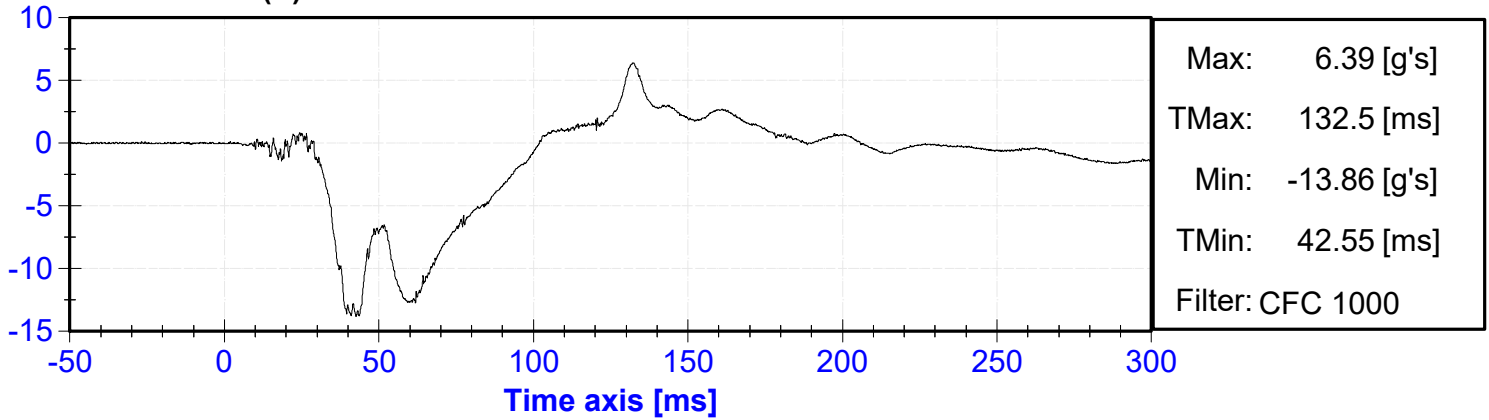


ES-2re Head (Y) Acceleration vs. Time

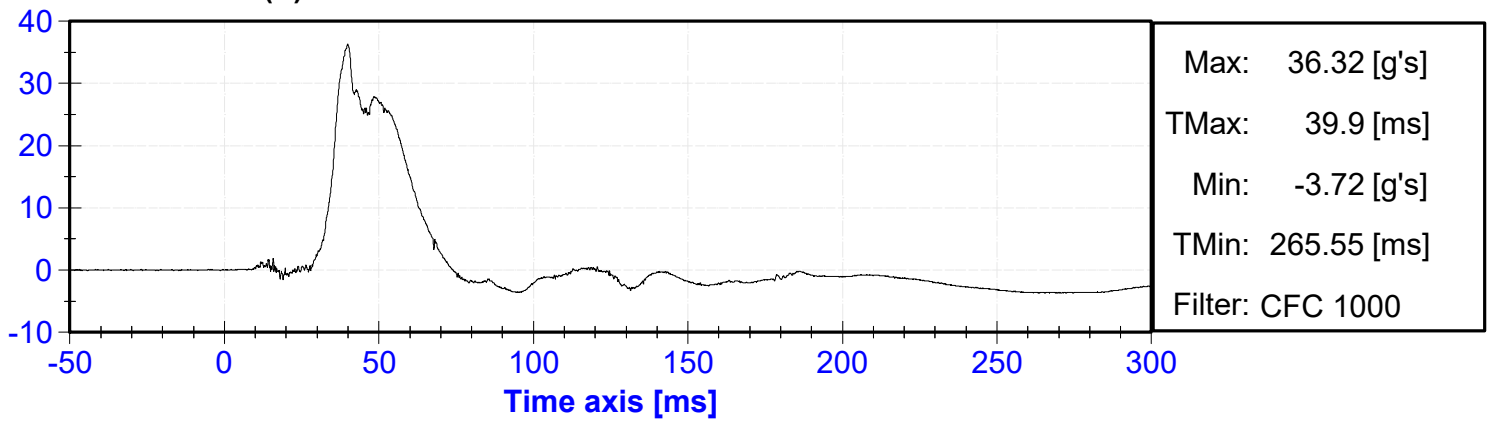

ES-2re Head (Z) Acceleration vs. Time

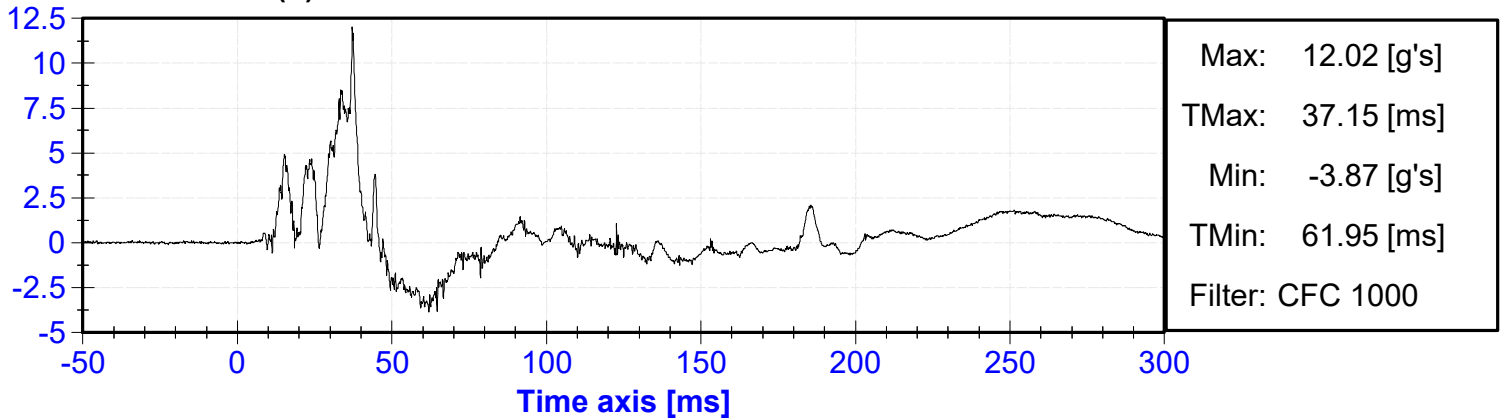


ES-2re Head Resultant Acceleration vs. Time

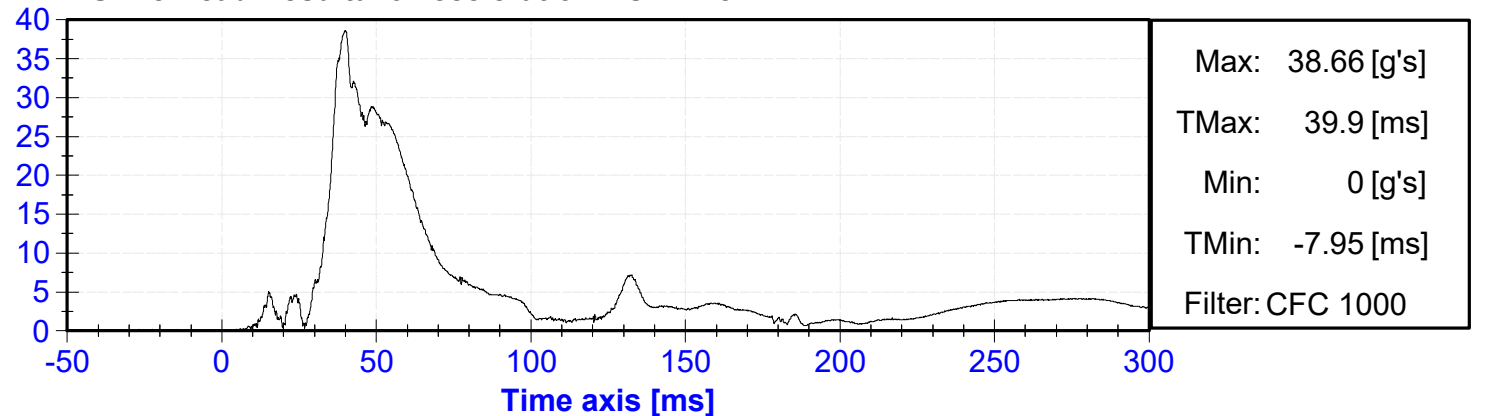


Driver Head CG X Velocity

VELOCITY [m/s]

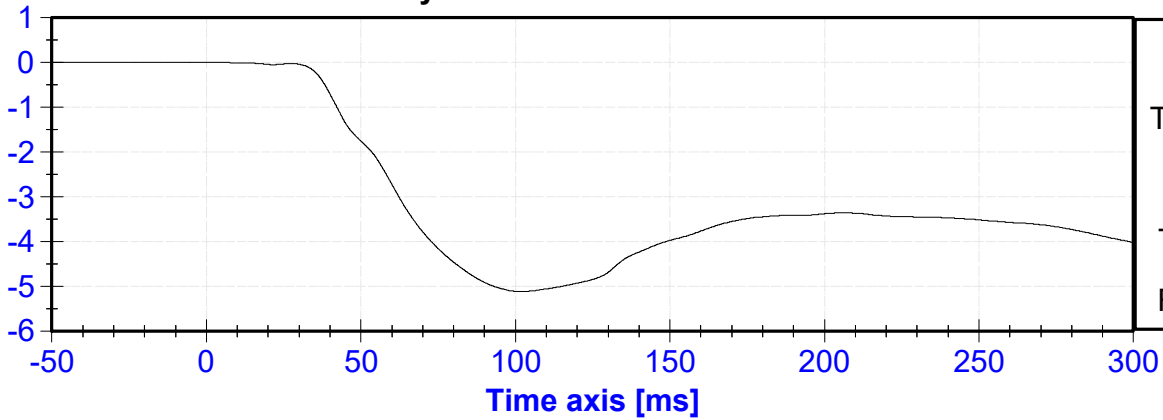


Driver Head CG Y Velocity

VELOCITY [m/s]

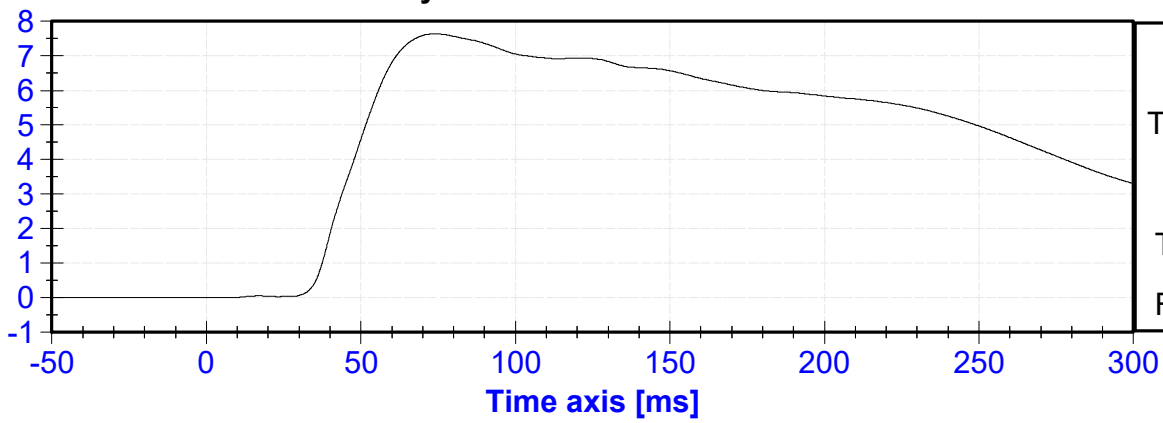


Driver Head CG Z Velocity

VELOCITY [m/s]

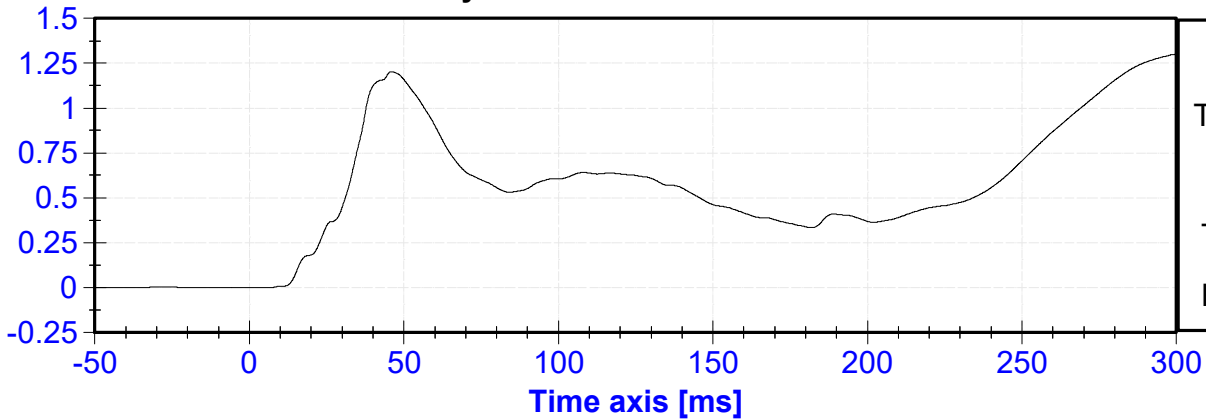


ES-2re Upper Thorax Rib Deflection Rate vs. Time

VELOCITY [m/s]

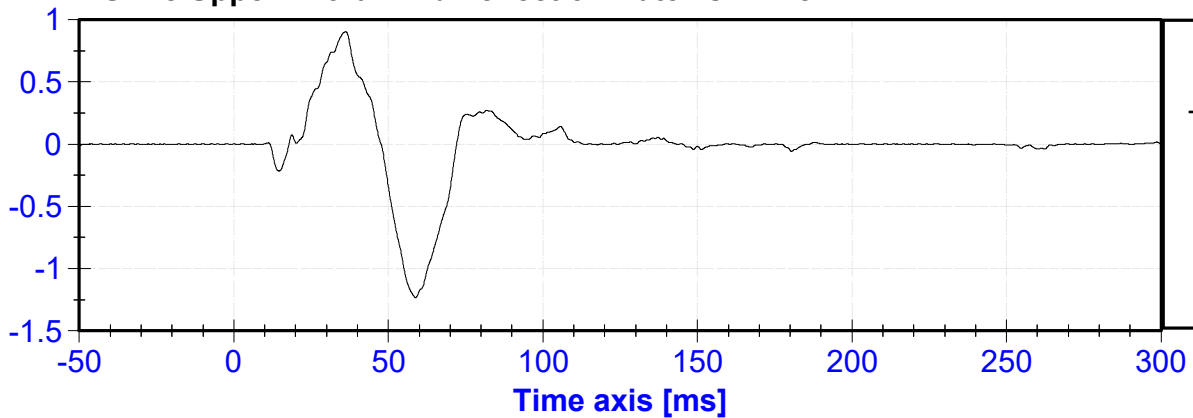


ES-2re Upper Thorax Rib Deflection (Y) vs. Time

DISPLACEMENT [mm]

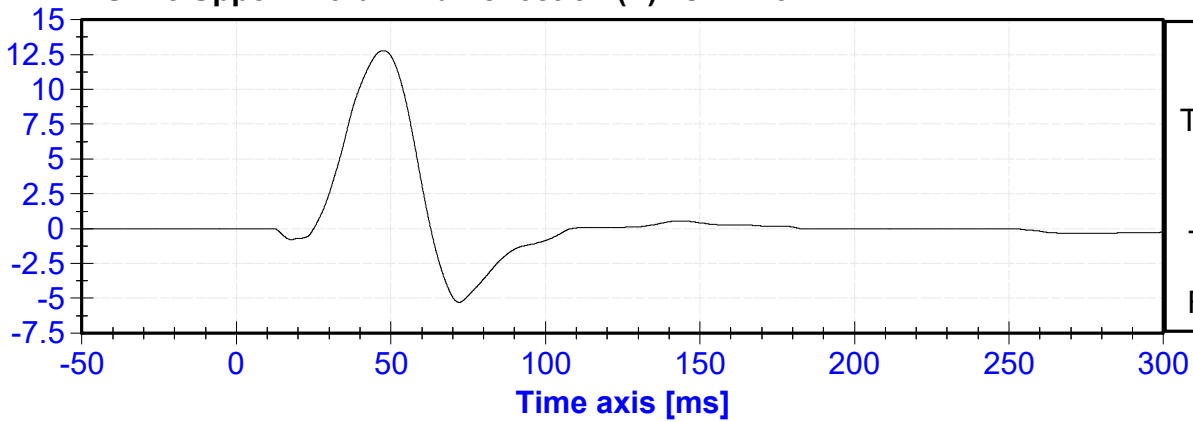


ES-2re Middle Thorax Rib Deflection Rate vs. Time

VELOCITY [m/s]

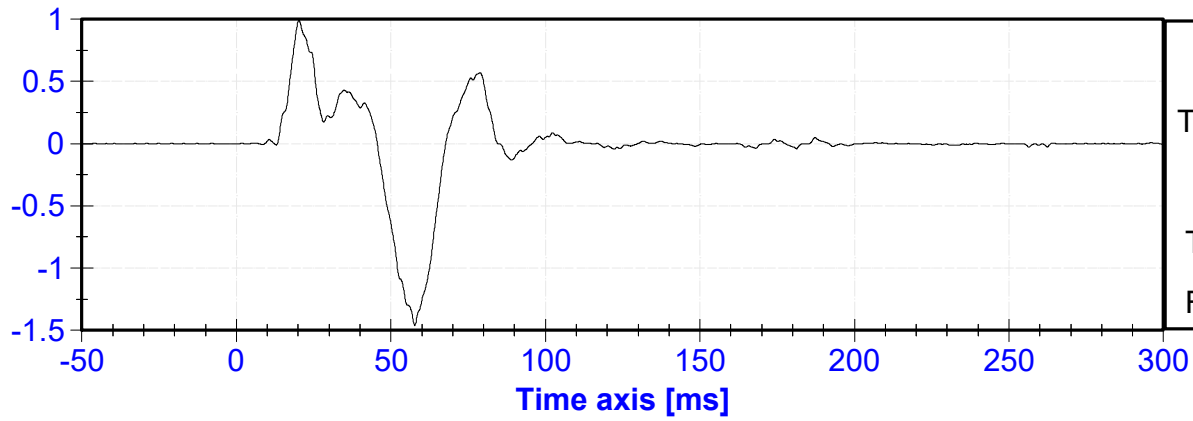


ES-2re Middle Thorax Rib Deflection (Y) vs. Time

DISPLACEMENT [mm]

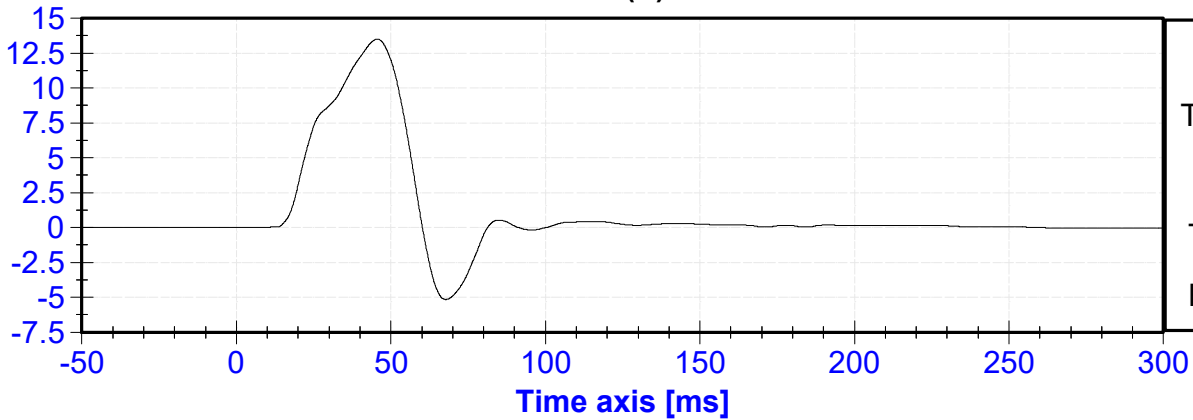


ES-2re Lower Thorax Rib Deflection Rate vs. Time


VELOCITY [m/s]

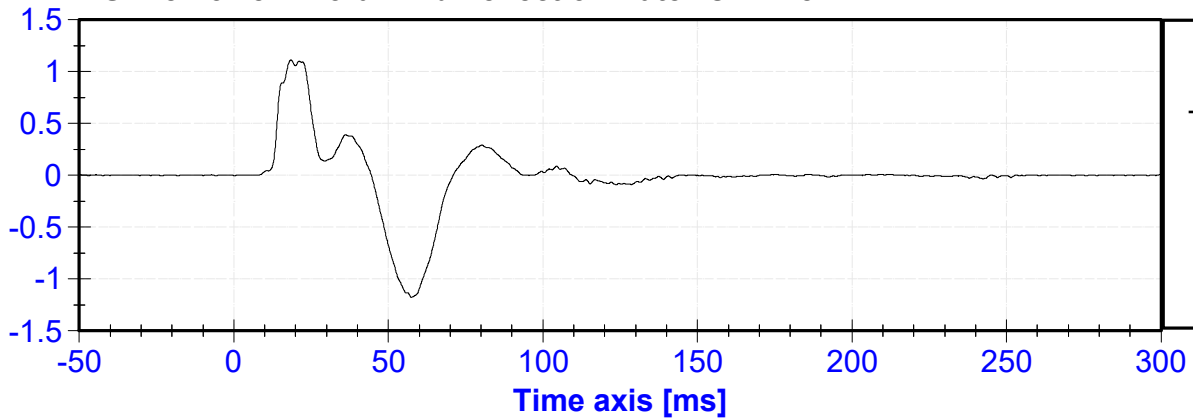


ES-2re Lower Thorax Rib Deflection (Y) vs. Time

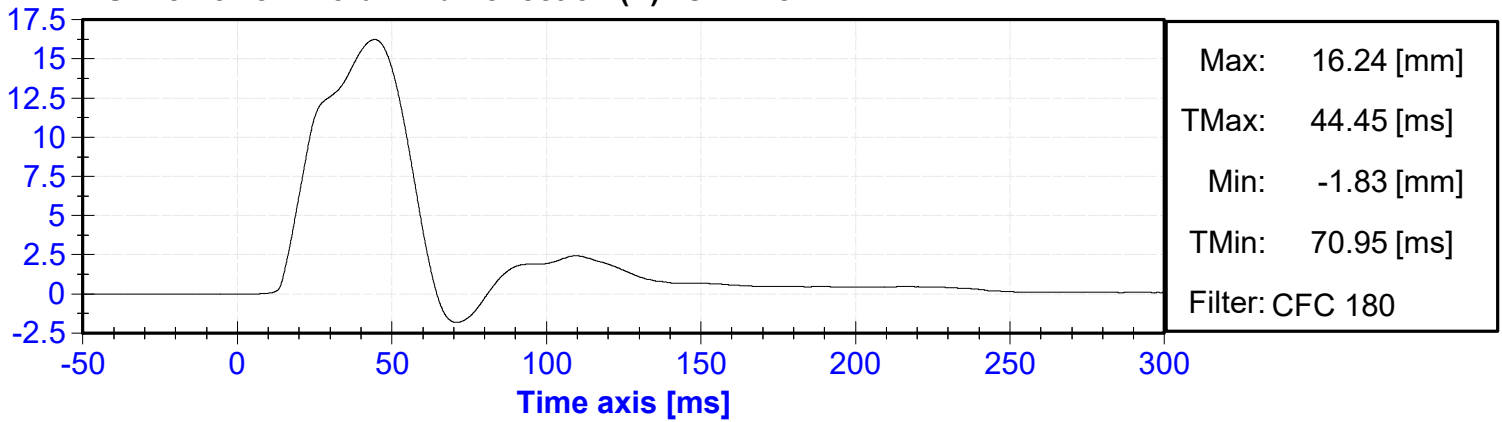


ES-2re Front Abdomen Force (Y) vs. Time

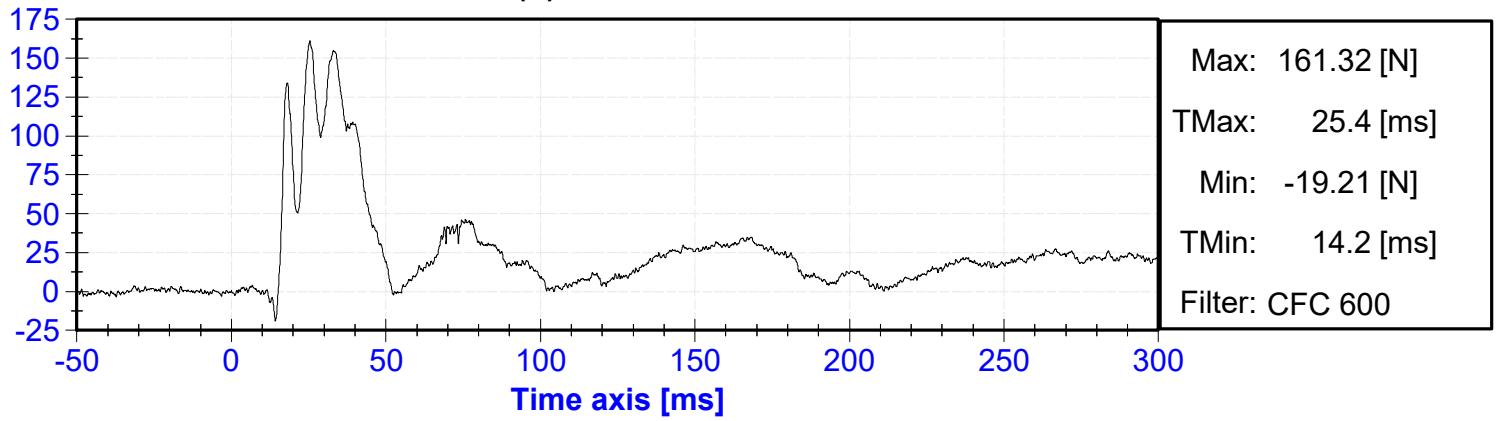


ES-2re Middle Abdomen Force (Y) vs. Time

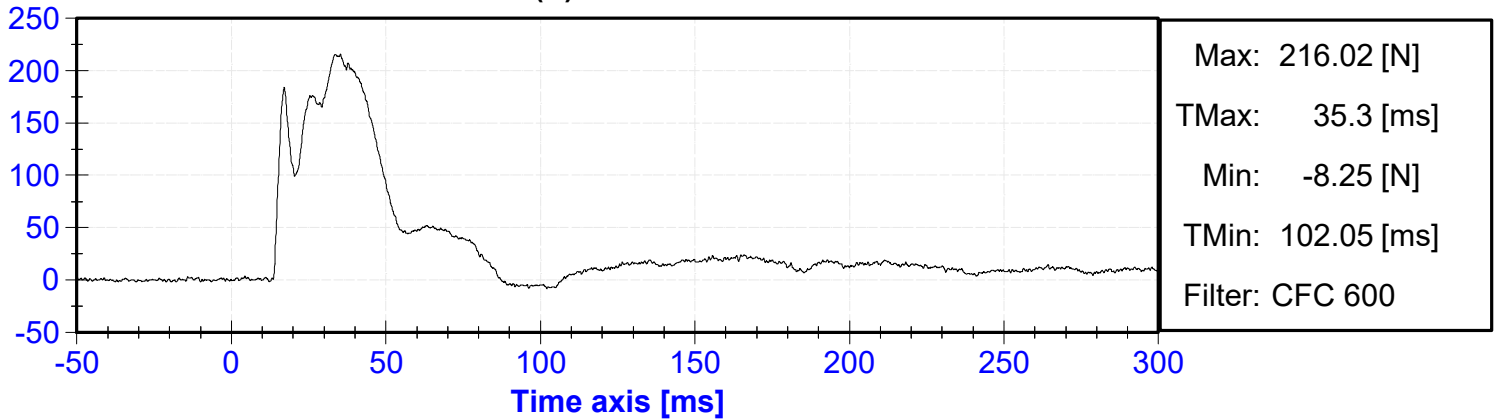


ES-2re Rear Abdomen Force (Y) vs. Time

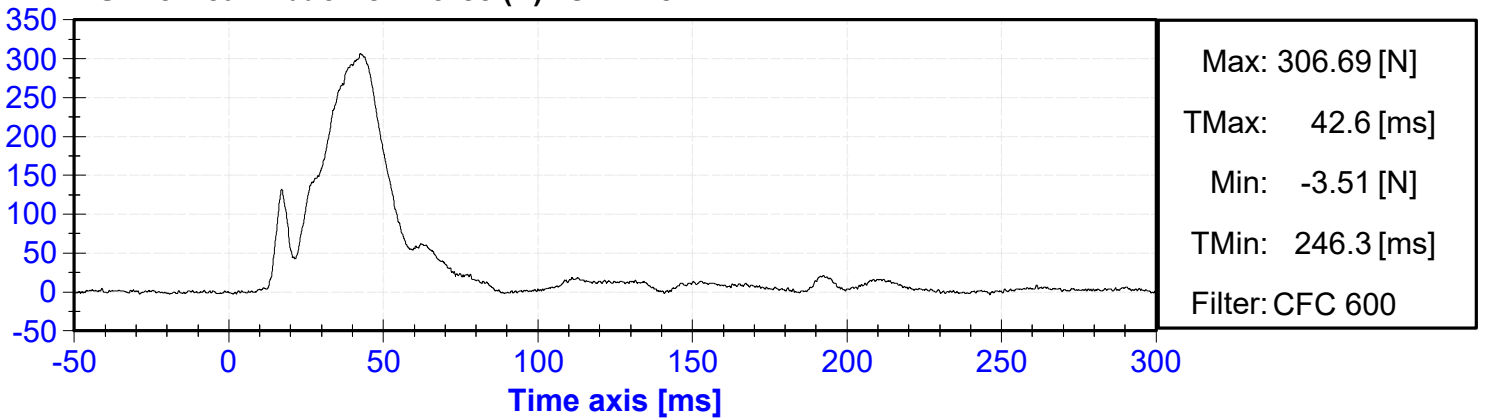

ES-2re Sum of Abdomen Forces vs. Time

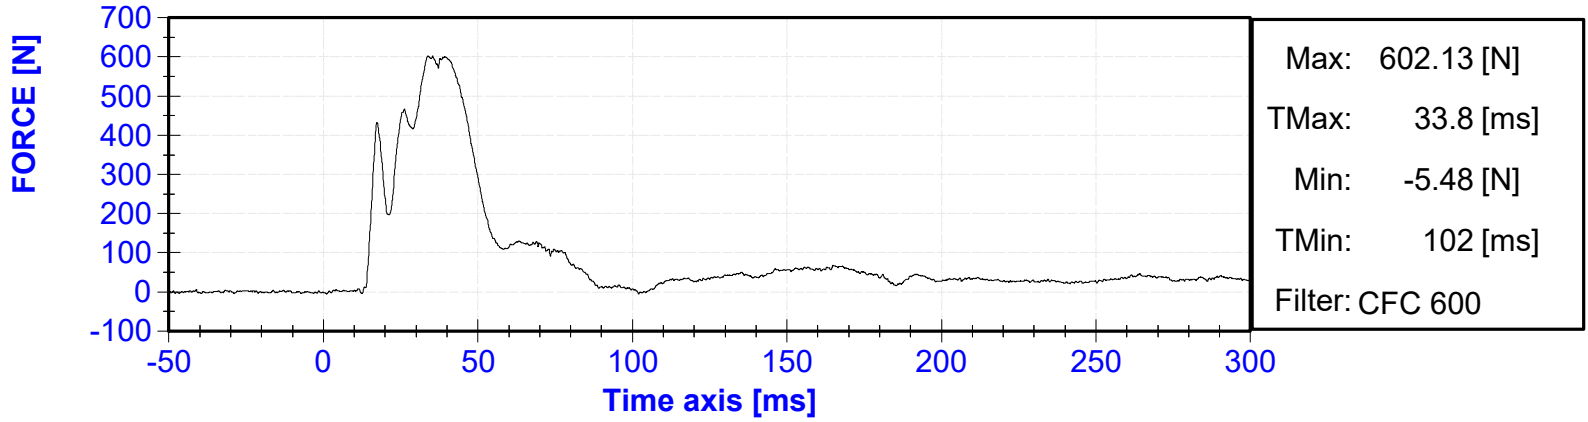

ES-2re Pubic Symphysis Force (Y) vs. Time

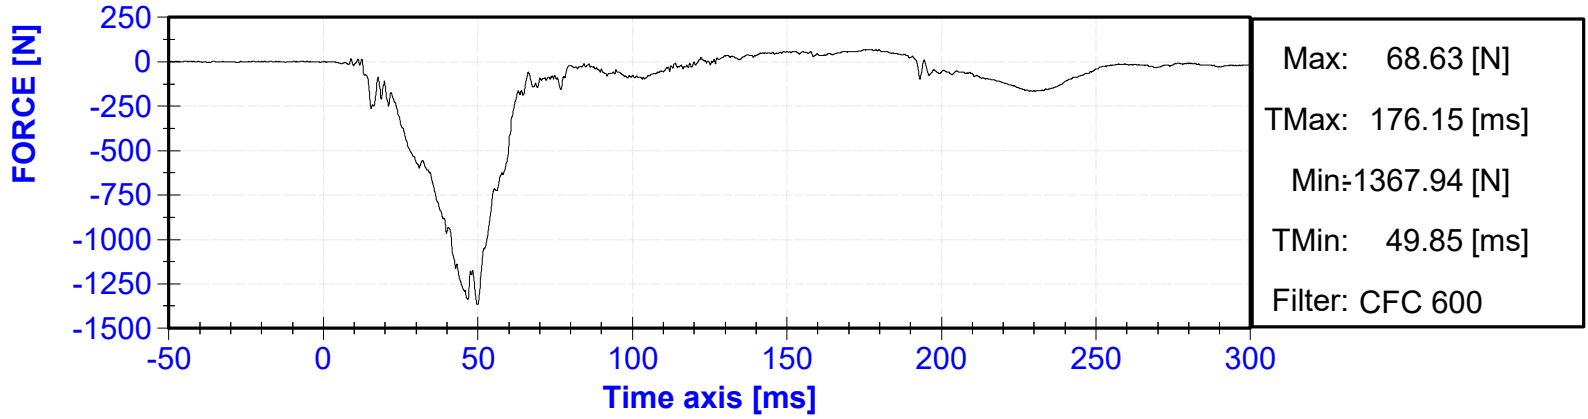


APPENDIX III
SID-IIs DUMMY RESPONSE DATA


Table of Data Plots

| No. | Description | Page |
|-----|---|-------|
| 1 | SID-IIs Head (X) Acceleration vs. Time | III-3 |
| 2 | SID-IIs Head (Y) Acceleration vs. Time | III-3 |
| 3 | SID-IIs Head (Z) Acceleration vs. Time | III-3 |
| 4 | SID-IIs Head Resultant Acceleration vs. Time | III-3 |
| 5 | SID-IIs Head (X) Velocity vs. Time | III-4 |
| 6 | SID-IIs Head (Y) Velocity vs. Time | III-4 |
| 7 | SID-IIs Head (Z) Velocity vs. Time | III-4 |
| 8 | SID-IIs Lower Spine X Acceleration vs. Time | III-4 |
| 9 | SID-IIs Lower Spine Y Acceleration vs. Time | III-5 |
| 10 | SID-IIs Lower Spine Z Acceleration vs. Time | III-5 |
| 11 | SID-IIs Lower Spine Resultant Acceleration vs. Time | III-5 |
| 12 | SID-IIs Lower Spine X Velocity vs. Time | III-5 |
| 13 | SID-IIs Lower Spine Y Velocity vs. Time | III-6 |
| 14 | SID-IIs Lower Spine Z Velocity vs. Time | III-6 |
| 15 | SID-IIs Acetabulum Force vs. Time | III-6 |
| 16 | SID-IIs Iliac Force vs. Time | III-6 |
| 17 | SID-IIs Sum of Iliac and Acetabulum Forces vs. Time | III-7 |


SID-IIs Head (X) Acceleration vs. Time

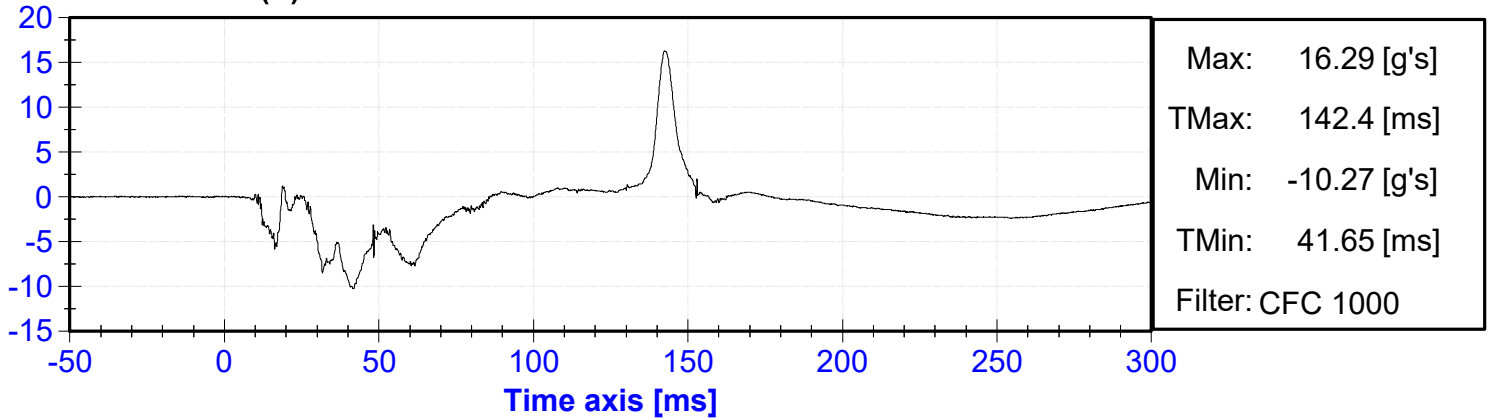


SID-IIs Head (Y) Acceleration vs. Time

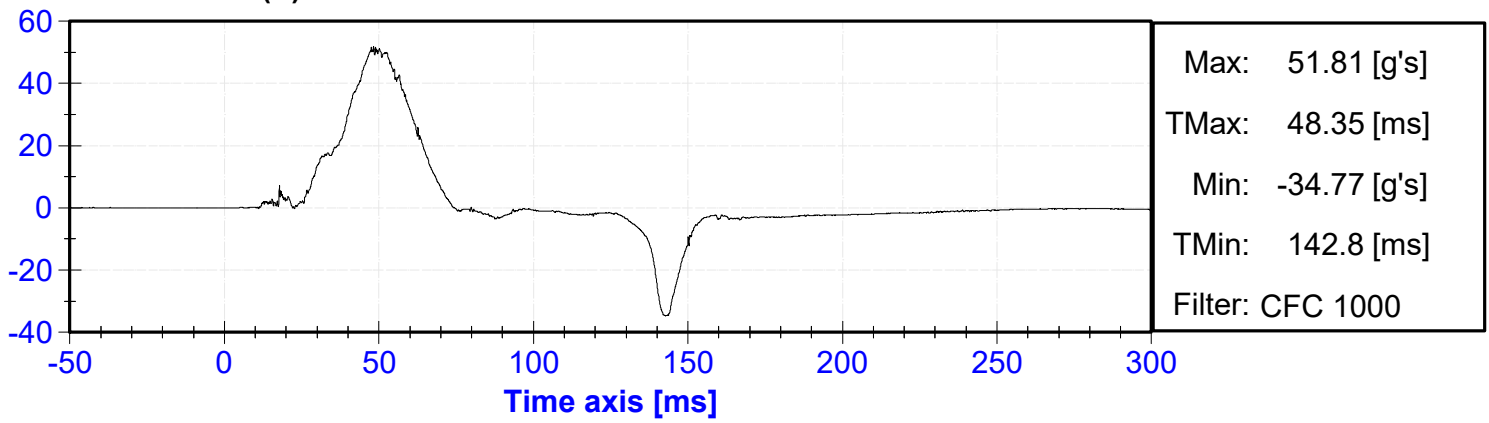

SID-IIs Head (Z) Acceleration vs. Time

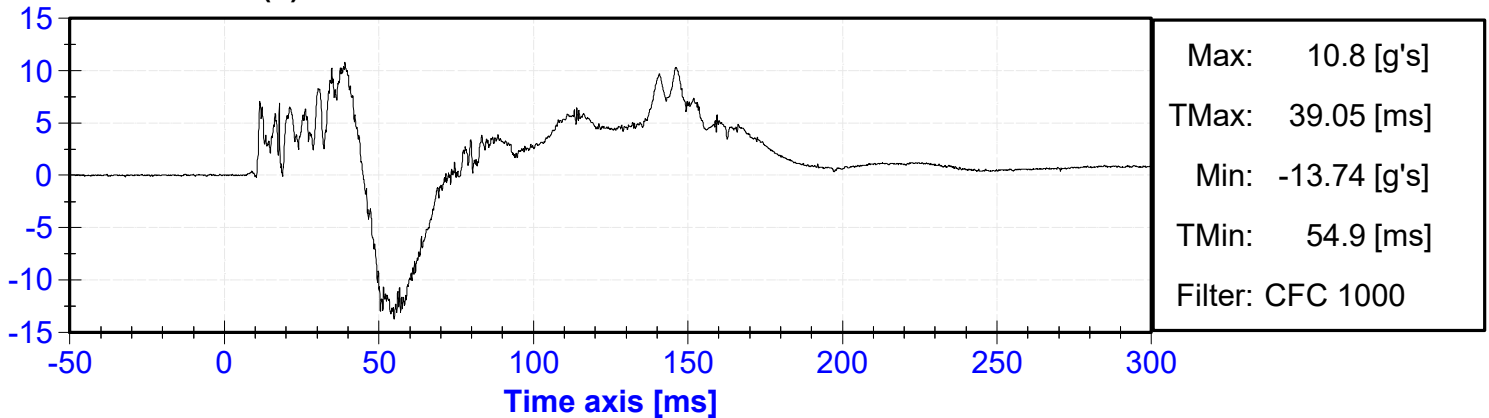


SID-IIs Head Resultant Acceleration vs. Time

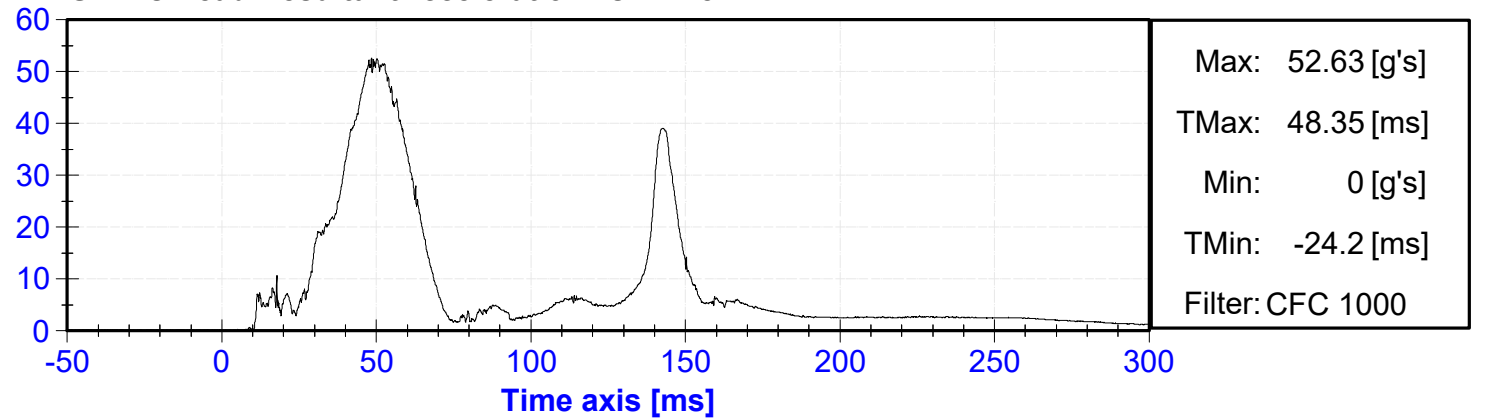


SID-IIs Head (X) Velocity vs. Time

VELOCITY [m/s]

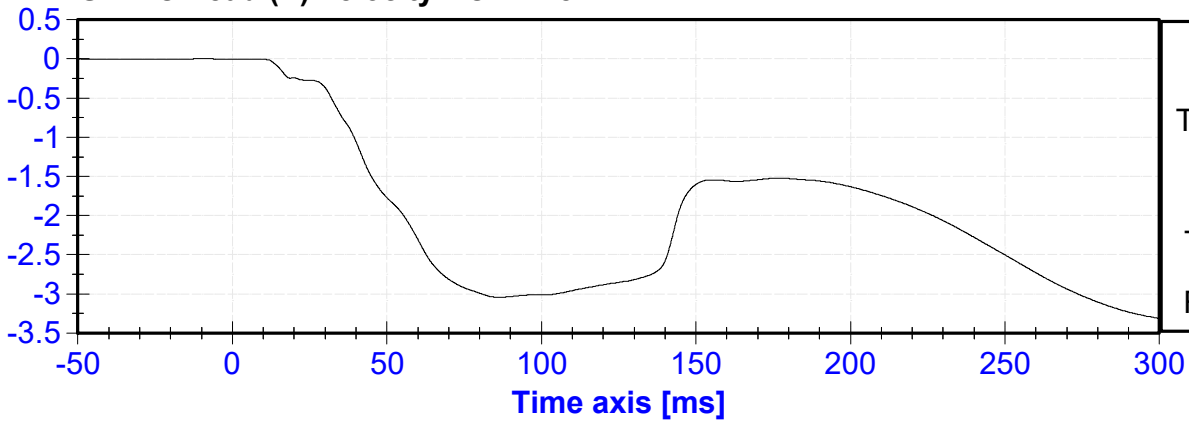


SID-IIs Head (Y) Velocity vs. Time

VELOCITY [m/s]

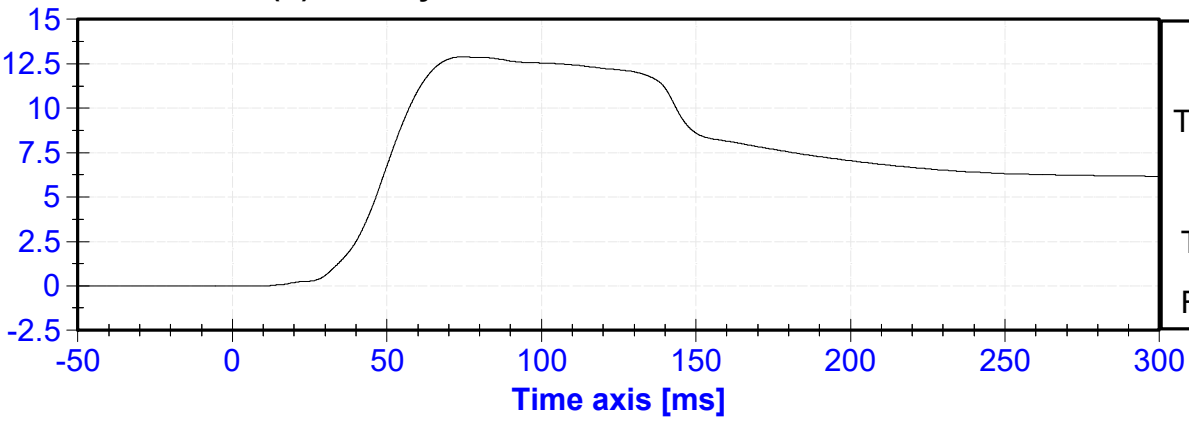


SID-IIs Head (Z) Velocity vs. Time

VELOCITY [m/s]

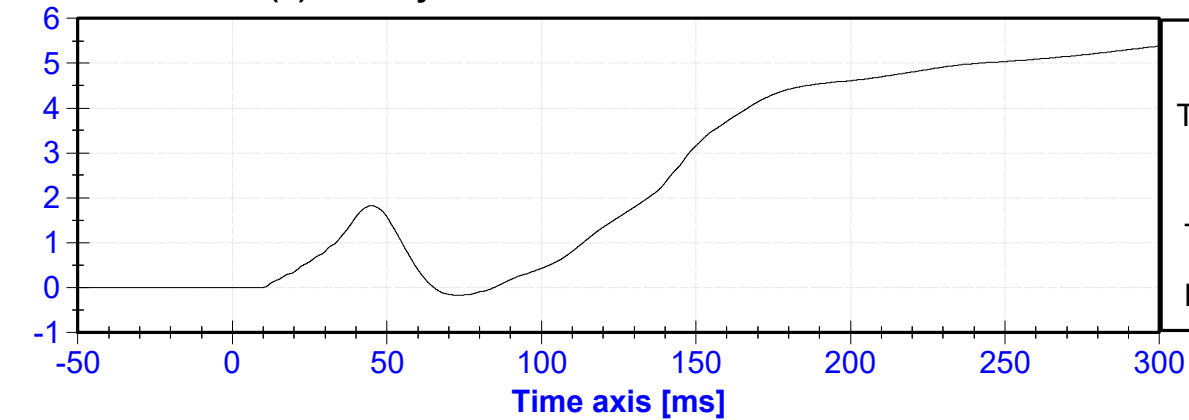


SID-IIs Lower Spine X Acceleration vs. Time


ACCELERATION [g's]

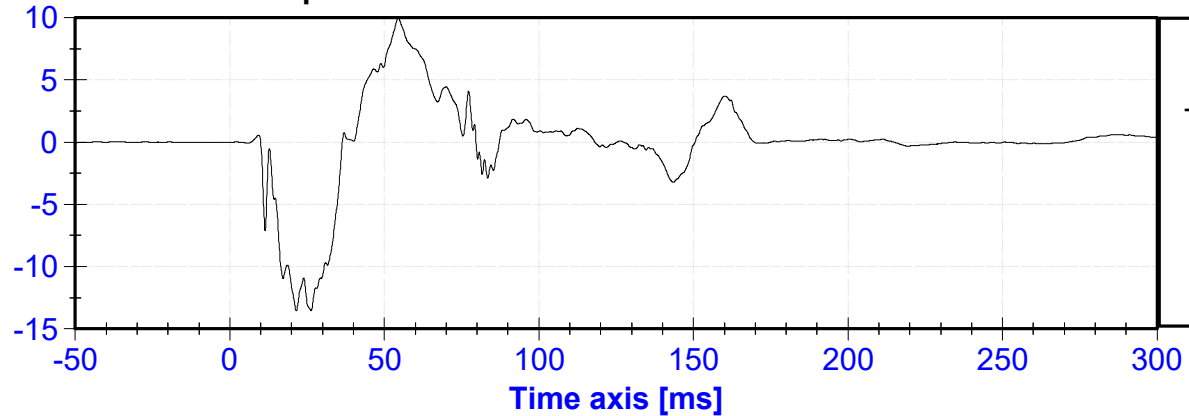


SID-IIs Lower Spine Y Acceleration vs. Time

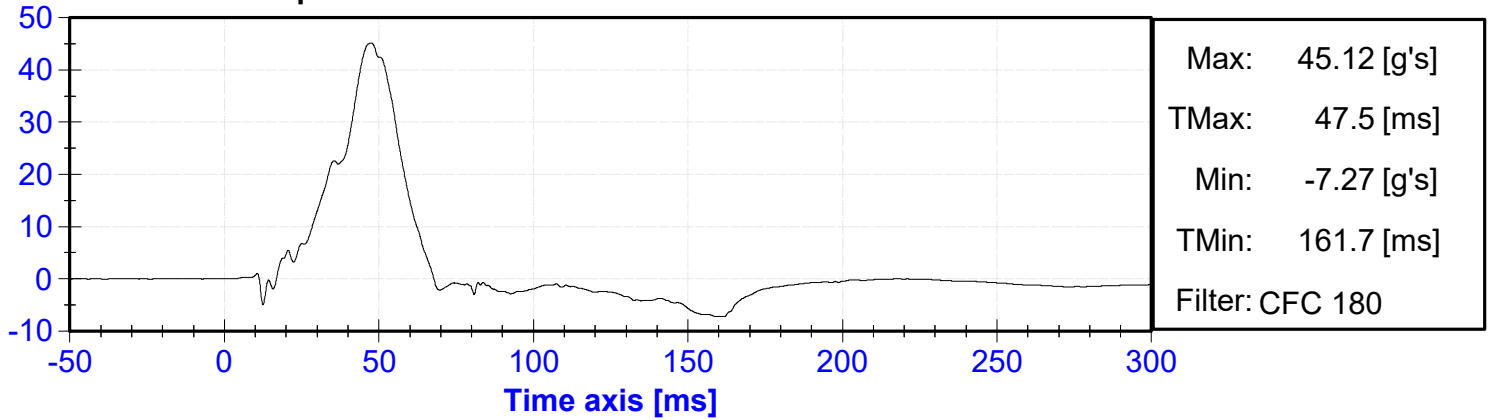


SID-IIs Lower Spine Z Acceleration vs. Time

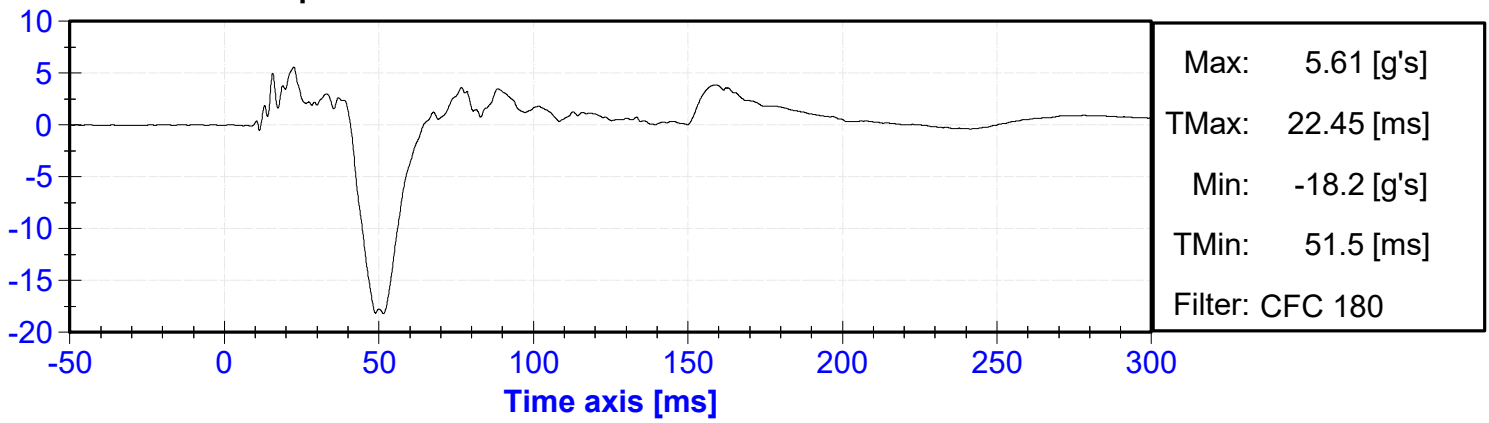


SID-IIs Lower Spine Resultant Acceleration vs. Time

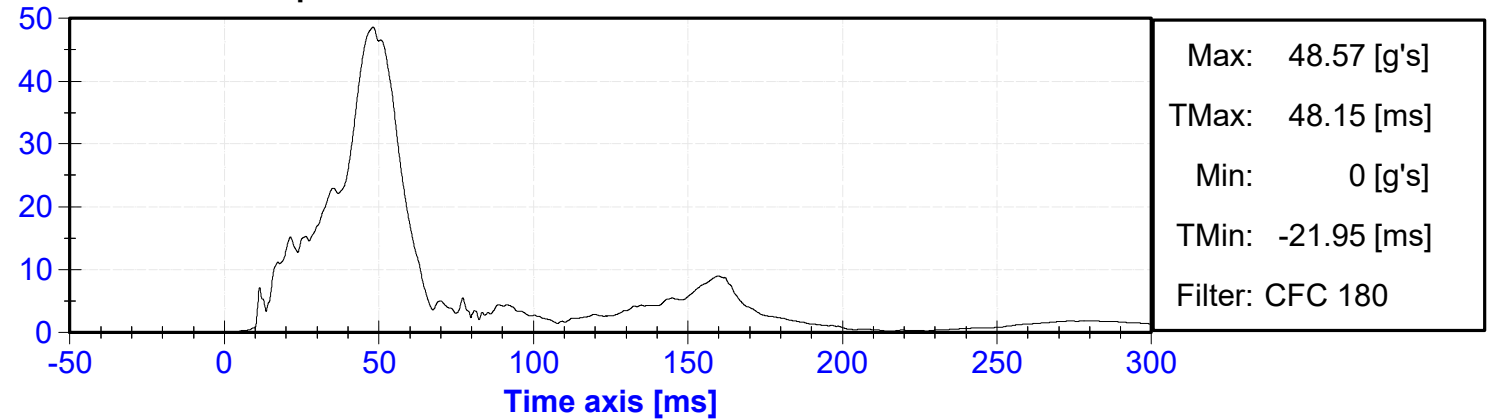


SID-IIs Lower Spine X Velocity vs. Time

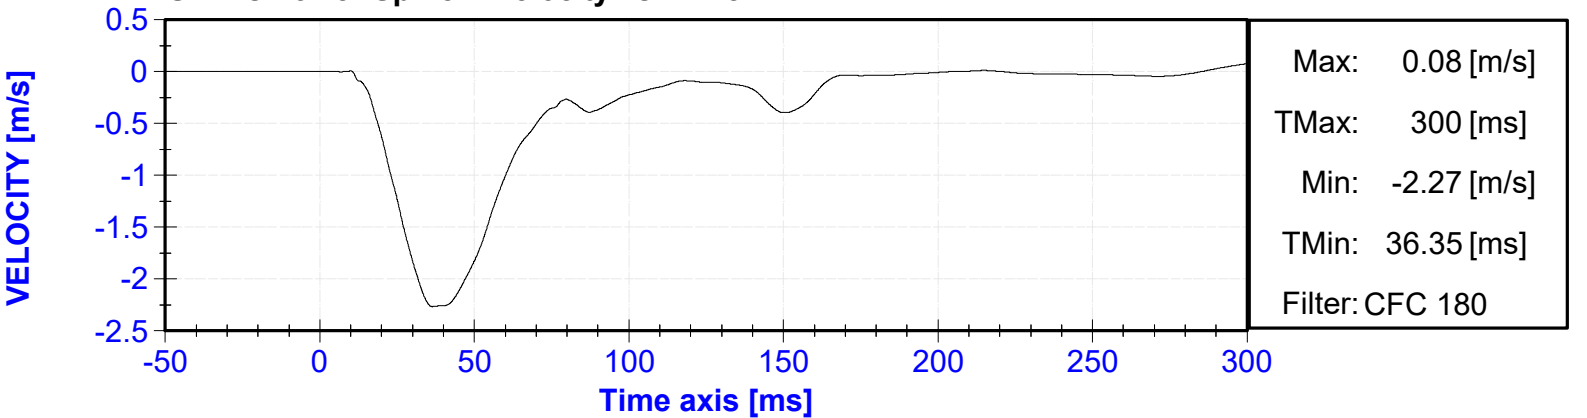


SID-IIs Lower Spine Y Velocity vs. Time

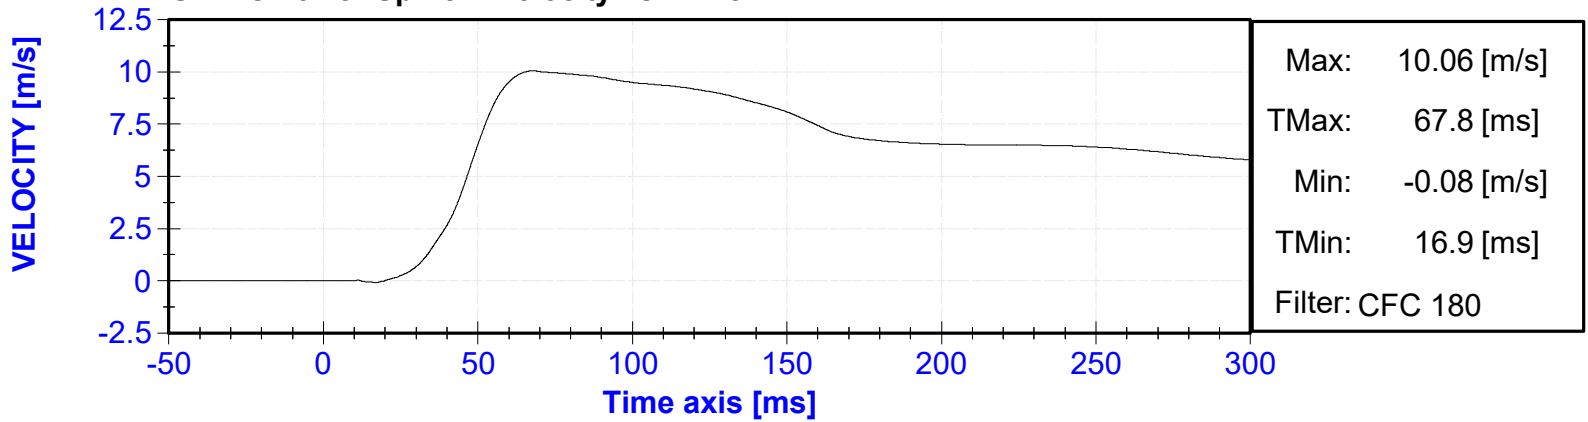


SID-IIs Lower Spine Z Velocity vs. Time

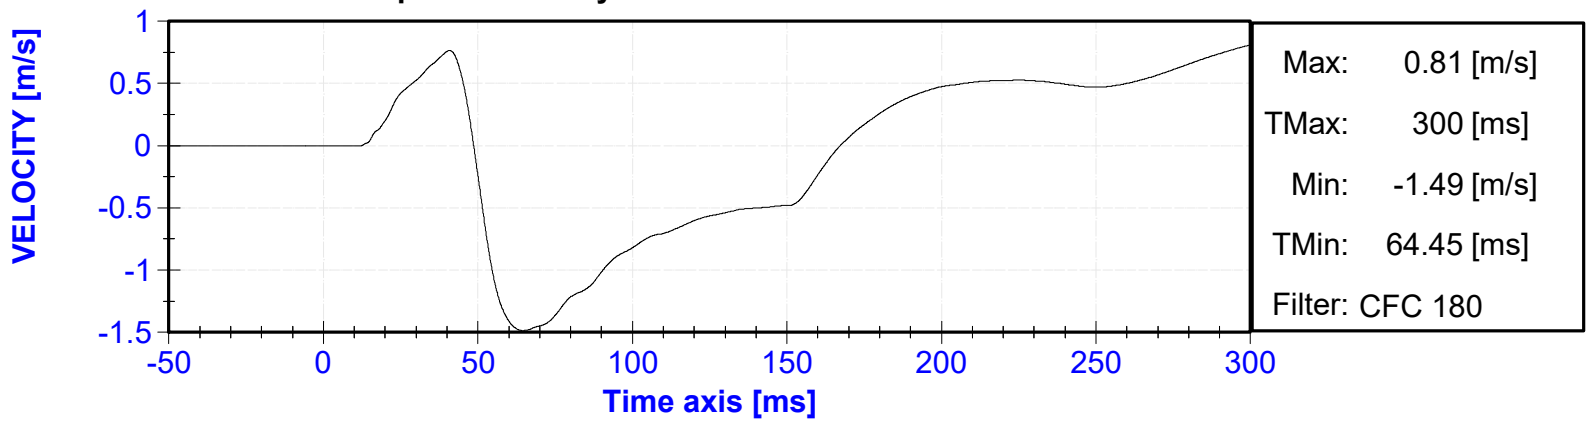


SID-IIs Acetabulum Force vs. Time

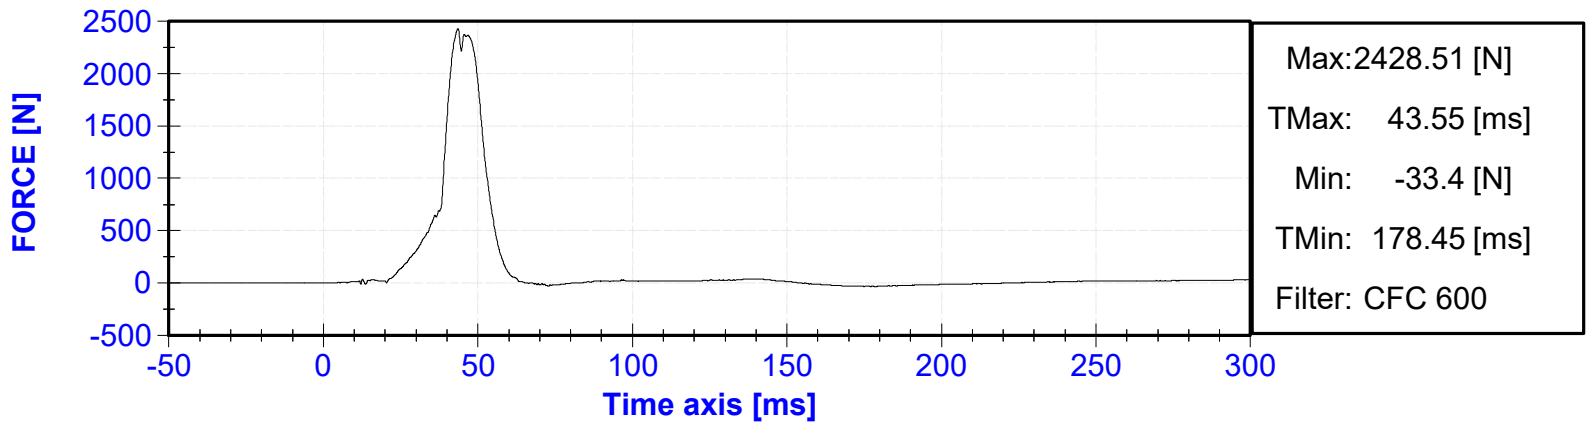

SID-IIs Iliac Force vs. Time

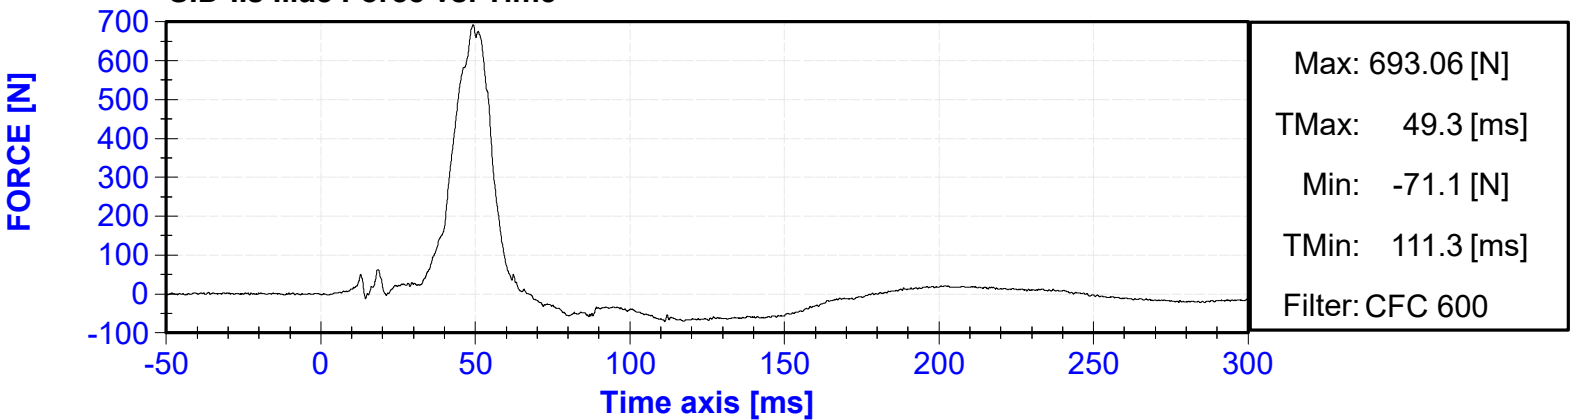

SID-IIs Sum of Iliac and Acetabulum Forces vs. Time

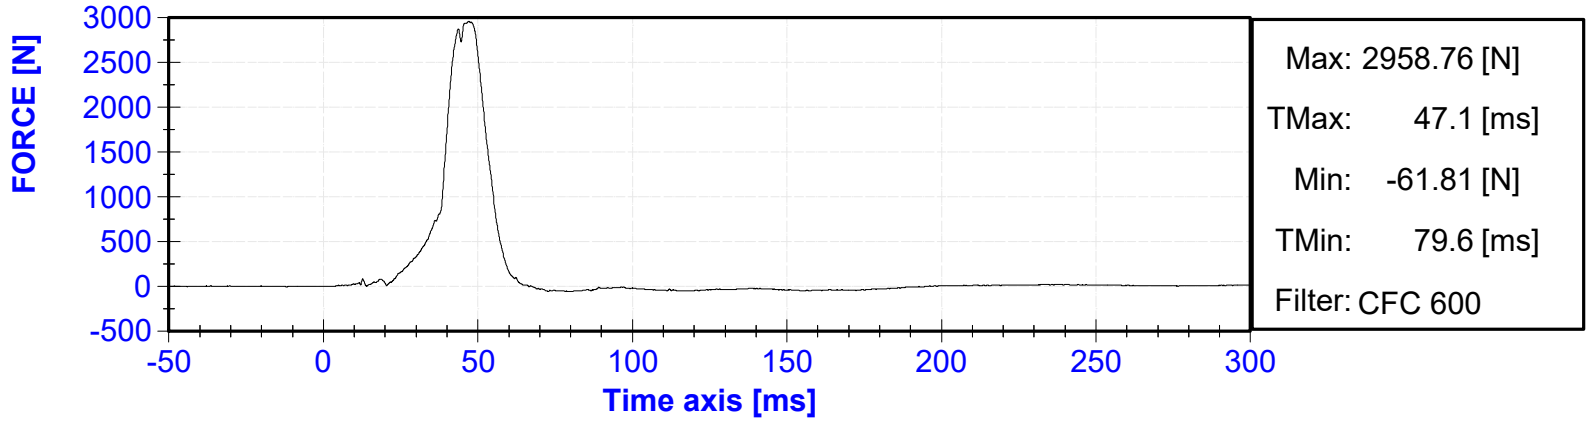


APPENDIX IV
VEHICLE AND MDB ACCELEROMETER RESPONSE DATA

Table of Data Plots


| No. | Description | Page |
|-----|--|-------|
| 1 | Right Sill at Front Seat (X) Acceleration vs. Time | IV-4 |
| 2 | Right Sill at Front Seat (X) Velocity vs. Time | IV-4 |
| 3 | Right Sill at Front Seat (Y) Acceleration vs. Time | IV-4 |
| 4 | Right Sill at Front Seat (Y) Velocity vs. Time | IV-4 |
| 5 | Right Sill at Front Seat (Z) Acceleration vs. Time | IV-5 |
| 6 | Right Sill at Front Seat (Z) Velocity vs. Time | IV-5 |
| 7 | Right Sill at Front Seat Resultant vs. Time | IV-5 |
| 8 | Right Sill at Rear Seat (X) Acceleration vs. Time | IV-5 |
| 9 | Right Sill at Rear Seat (X) Velocity vs. Time | IV-6 |
| 10 | Right Sill at Rear Seat (Y) Acceleration vs. Time | IV-6 |
| 11 | Right Sill at Rear Seat (Y) Velocity vs. Time | IV-6 |
| 12 | Right Sill at Rear Seat (Z) Acceleration vs. Time | IV-6 |
| 13 | Right Sill at Rear Seat (Z) Velocity vs. Time | IV-7 |
| 14 | Right Sill at Rear Seat Resultant Acceleration vs. Time | IV-7 |
| 15 | Rear Floorpan Above Axle (X) Acceleration vs. Time | IV-7 |
| 16 | Rear Floorpan Above Axle (X) Velocity vs. Time | IV-7 |
| 17 | Rear Floorpan Above Axle (Y) Acceleration vs. Time | IV-8 |
| 18 | Rear Floorpan Above Axle (Y) Velocity vs. Time | IV-8 |
| 19 | Rear Floorpan Above Axle (Z) Acceleration vs. Time | IV-8 |
| 20 | Rear Floorpan Above Axle (Z) Velocity vs. Time | IV-8 |
| 21 | Rear Floorpan Above Axle Resultant Acceleration vs. Time | IV-9 |
| 22 | Left Sill at Rear Door (Y) Acceleration vs. Time | IV-9 |
| 23 | Left Sill at Rear Door (Y) Velocity vs. Time | IV-9 |
| 24 | Left Sill at Front Door (Y) Acceleration vs. Time. | IV-9 |
| 25 | Left Sill at Front Door (Y) Velocity vs. Time | IV-10 |
| 26 | Right Rear Occ. Compartment(Y) Acceleration vs. Time | IV-10 |
| 27 | Right Rear Occ. Compartment(Y) Velocity vs. Time | IV-10 |
| 28 | Left B-Post Lower (Y) Acceleration vs. Time | IV-10 |
| 29 | Left B-Post Lower (Y) Velocity vs. Time | IV-11 |
| 30 | Left B-Post Middle (Y) Acceleration vs. Time | IV-11 |
| 31 | Left B-Post Middle (Y) Velocity vs. Time | IV-11 |
| 32 | Left A-Post Lower(Y) Acceleration vs. Time | IV-11 |
| 33 | Left A-Post Lower(Y) Velocity vs. Time | IV-12 |
| 34 | Left A-Post Middle (Y) Acceleration vs. Time | IV-12 |
| 35 | Left A-Post Middle (Y) Velocity vs. Time | IV-12 |
| 36 | Front Seat Track (Y) Acceleration vs. Time | IV-12 |
| 37 | Front Seat Track (Y) Velocity vs. Time | IV-13 |
| 38 | Rear Seat Track or Structure (Y) Acceleration vs. Time | IV-13 |
| 39 | Rear Seat Track or Structure (Y) Velocity vs. Time | IV-13 |
| 40 | Vehicle CG (X) Acceleration vs. Time | IV-13 |
| 41 | Vehicle CG (X) Velocity vs. Time | IV-14 |
| 42 | Vehicle CG (Y) Acceleration vs. Time | IV-14 |
| 43 | Vehicle CG (Y) Velocity vs. Time | IV-14 |
| 44 | Vehicle CG (Z) Acceleration vs. Time | IV-14 |
| 45 | Vehicle CG (Z) Velocity vs. Time | IV-15 |
| 46 | Vehicle CG Resultant Acceleration vs. Time | IV-15 |
| 47 | MDB Center of Gravity (X) Acceleration vs. Time | IV-15 |
| 48 | MDB Center of Gravity (X) Velocity vs. Time | IV-15 |
| 49 | MDB Center of Gravity (Y) Acceleration vs. Time | IV-16 |
| 50 | MDB Center of Gravity (Y) Velocity vs. Time | IV-16 |
| 51 | MDB Center of Gravity (Z) Acceleration vs. Time | IV-16 |
| 52 | MDB Center of Gravity (Z) Velocity vs. Time | IV-16 |

| | | |
|----|---|-------|
| 53 | MDB Center of Gravity Resultant Acceleration vs. Time | IV-17 |
| 54 | MDB Rear (X) Acceleration vs. Time | IV-17 |
| 55 | MDB Rear (X) Velocity vs. Time | IV-17 |
| 56 | MDB Rear (Y) Acceleration vs. Time | IV-17 |
| 57 | MDB Rear (Y) Velocity vs. Time | IV-18 |


Right Sill at Front Seat (X) Acceleration vs. Time

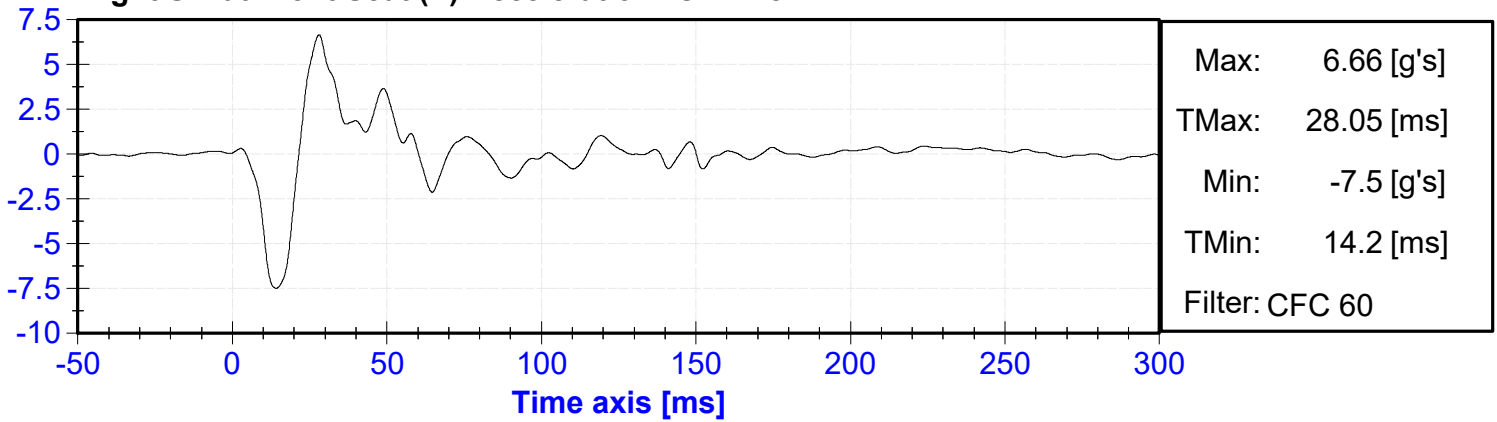


Right Sill at Front Seat (X) Velocity vs. Time

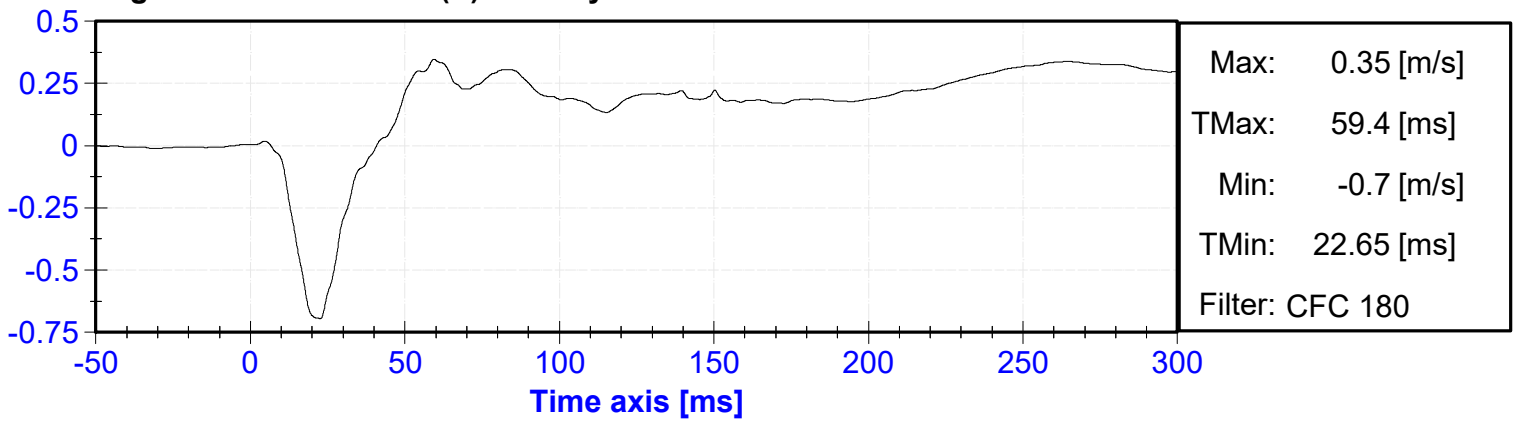


Right Sill at Front Seat (Y) Acceleration vs. Time

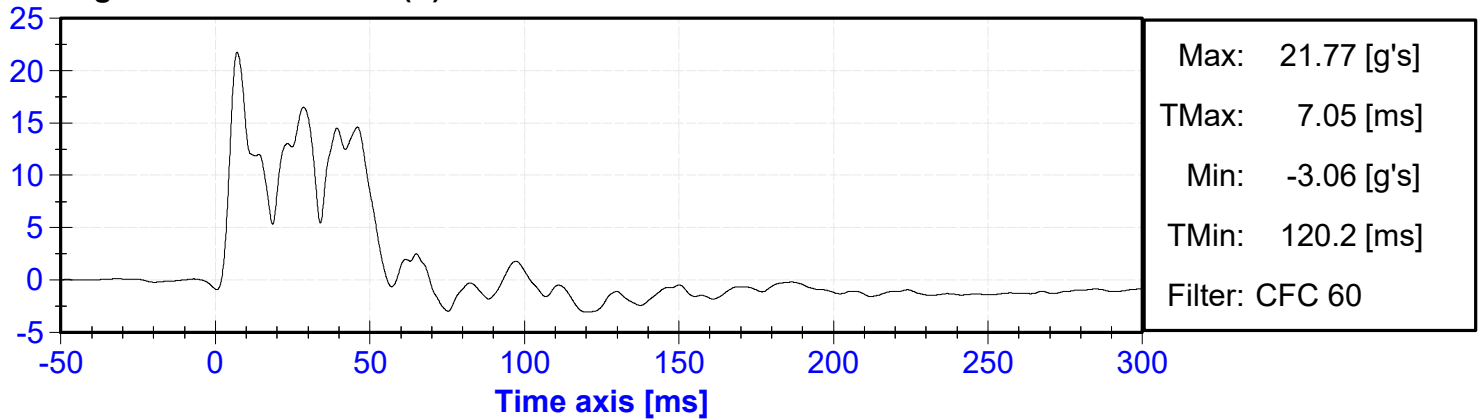


Right Sill at Front Seat (Y) Velocity vs. Time

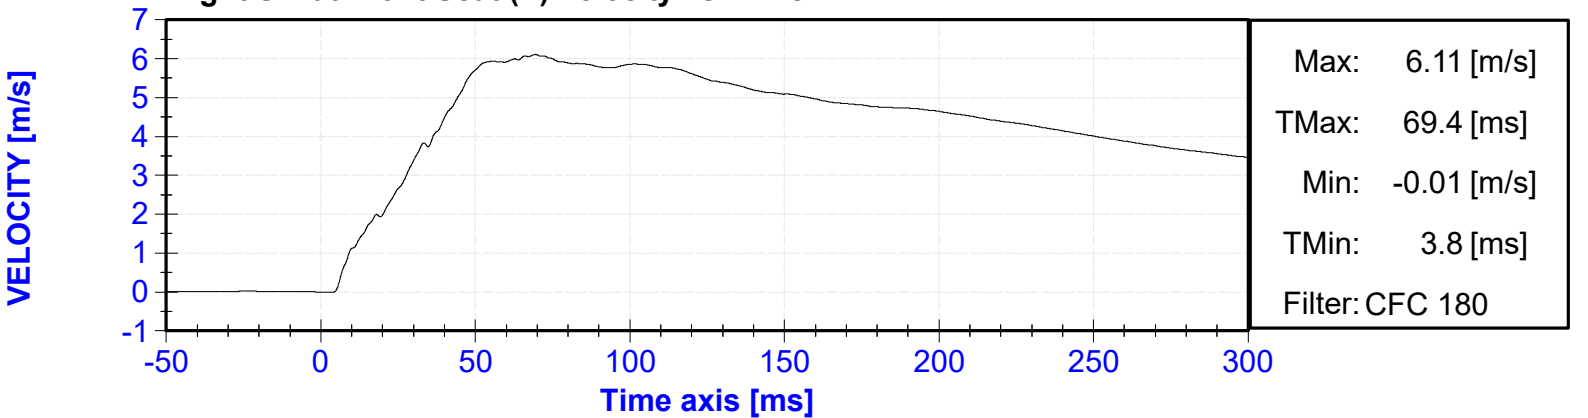


Right Sill at Front Seat (Z) Acceleration vs. Time

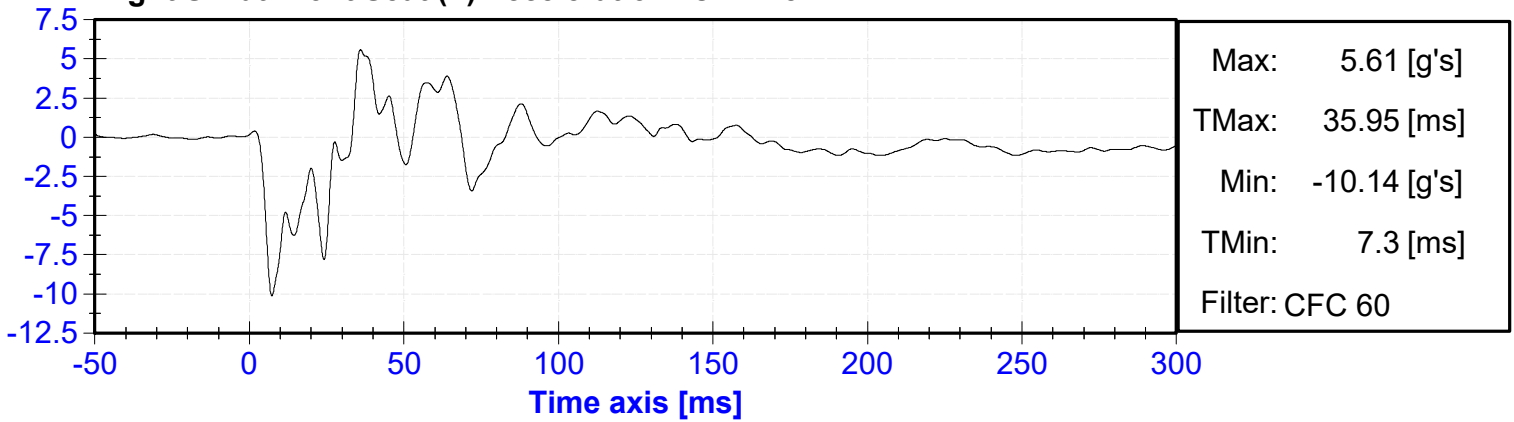


Right Sill at Front Seat (Z) Velocity vs. Time

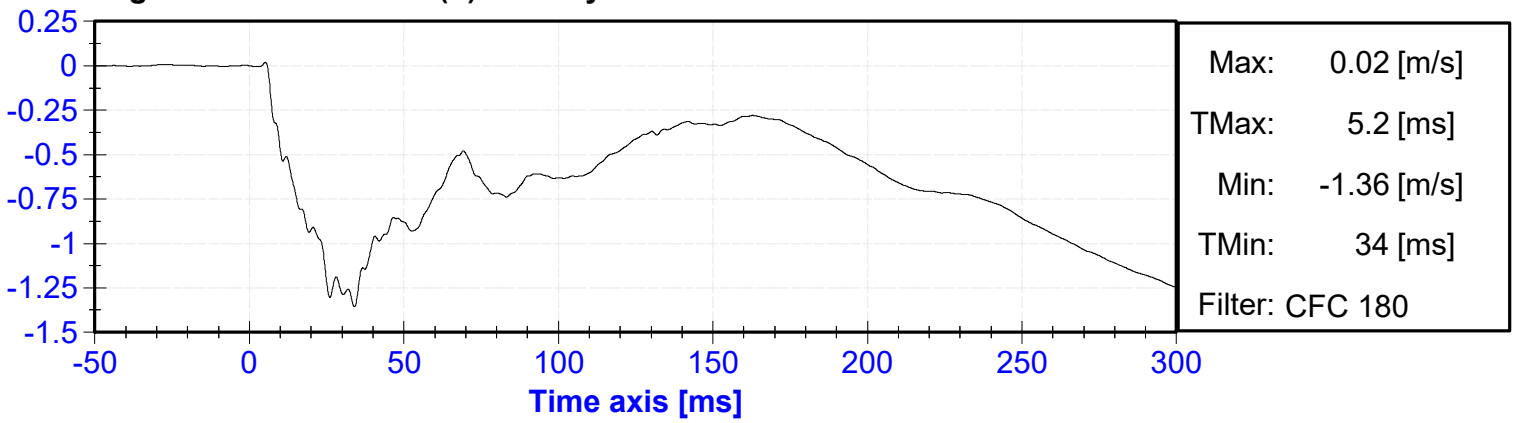

Right Sill at Front Seat Resultant vs. Time

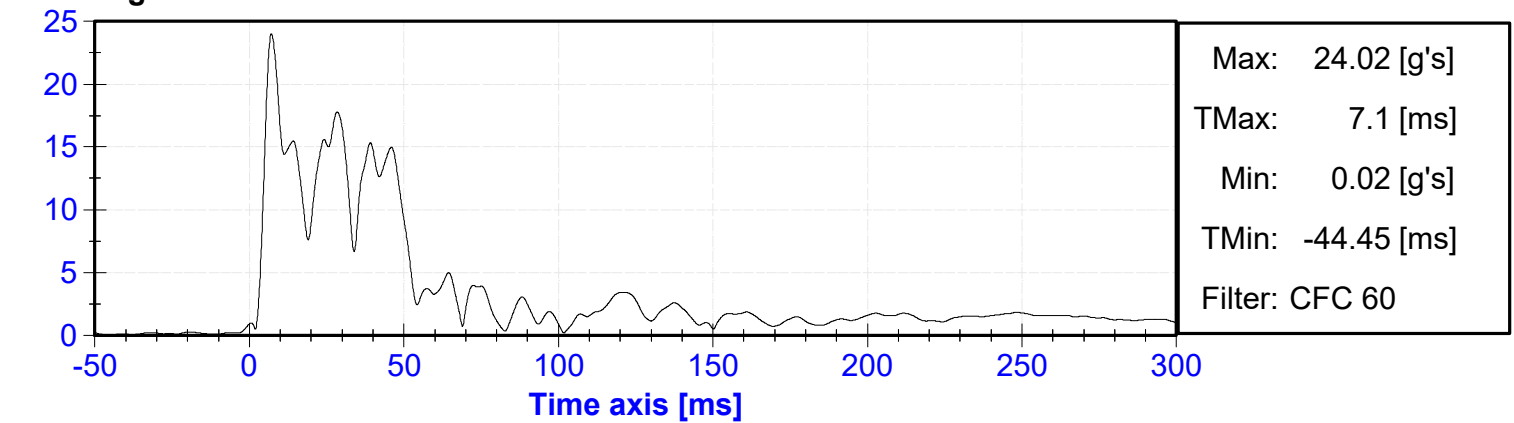


Right Sill at Rear Seat (X) Acceleration vs. Time

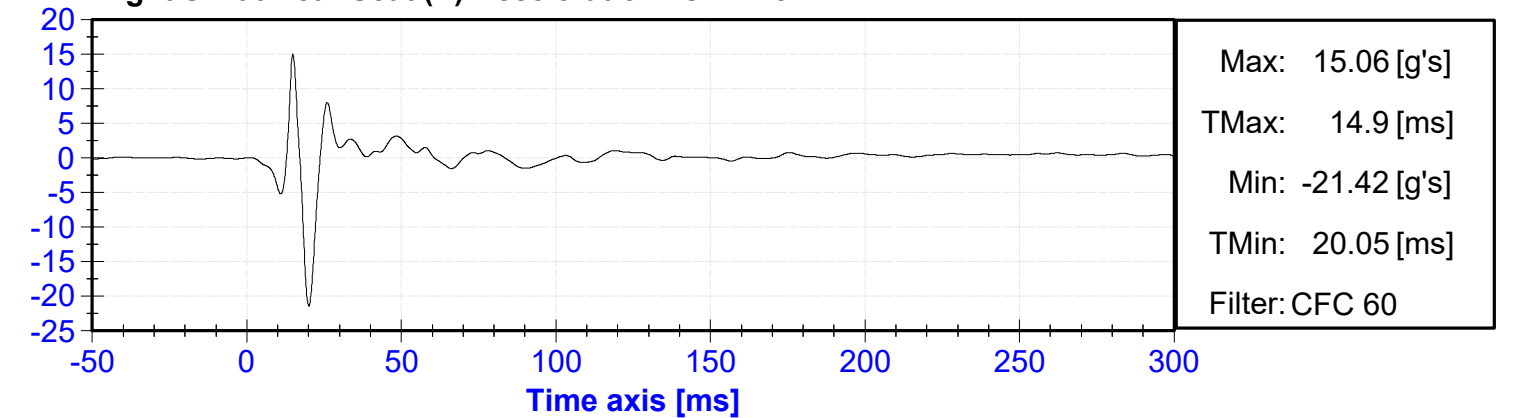


Right Sill at Rear Seat (X) Velocity vs. Time

VELOCITY [m/s]

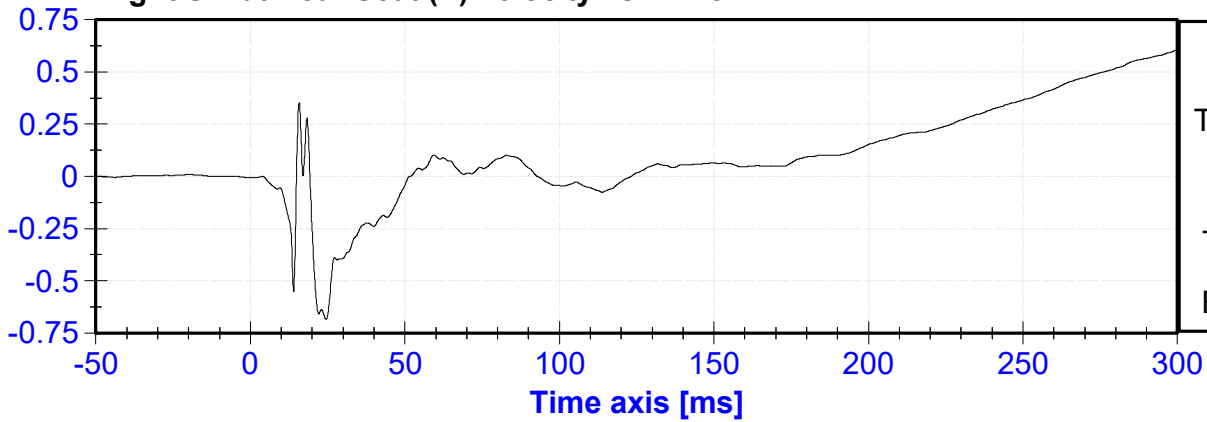


Right Sill at Rear Seat (Y) Acceleration vs. Time

ACCELERATION [g's]

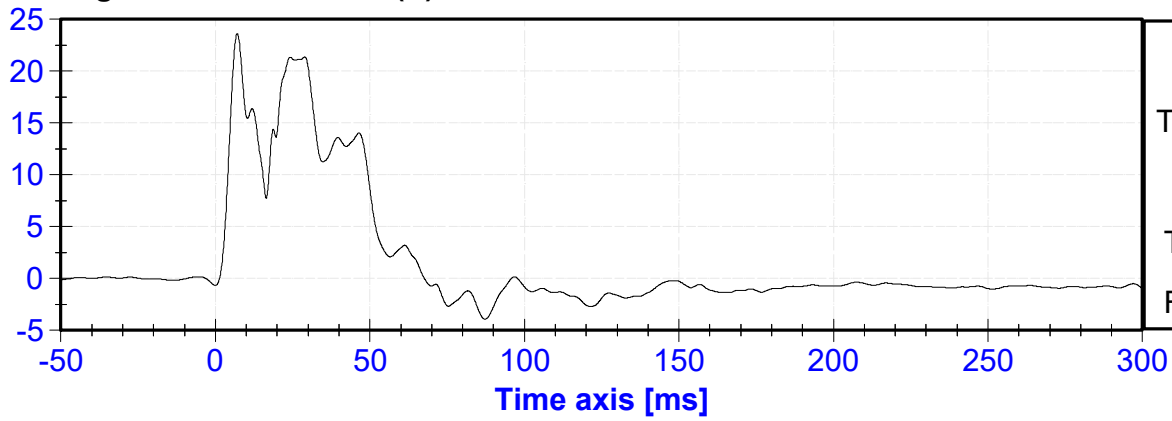


Right Sill at Rear Seat (Y) Velocity vs. Time

VELOCITY [m/s]

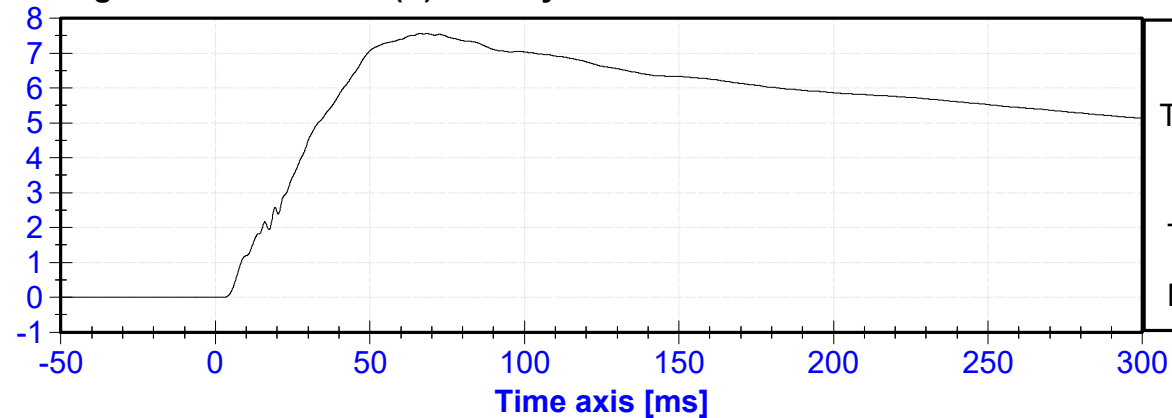


Right Sill at Rear Seat (Z) Acceleration vs. Time

ACCELERATION [g's]

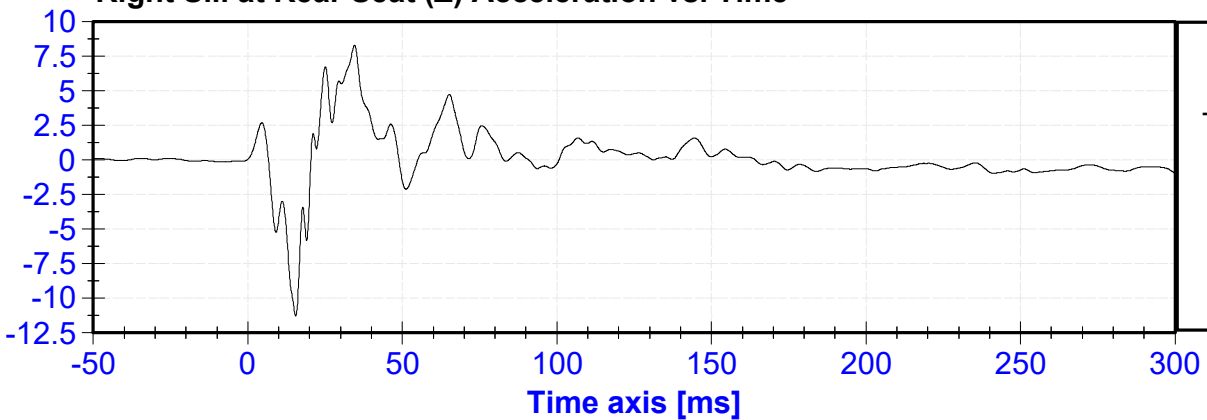


Right Sill at Rear Seat (Z) Velocity vs. Time

VELOCITY [m/s]

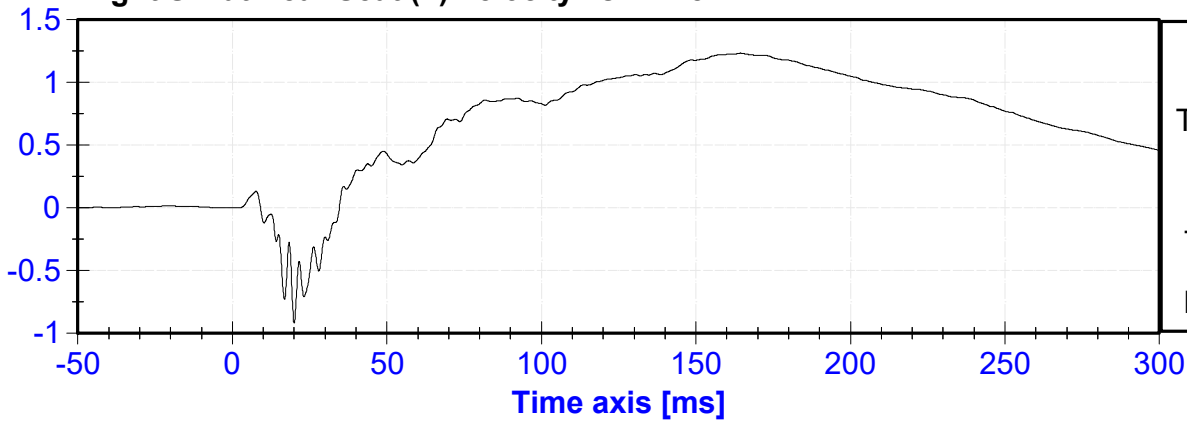


Right Sill at Rear Seat Resultant Acceleration vs. Time

ACCELERATION [g's]

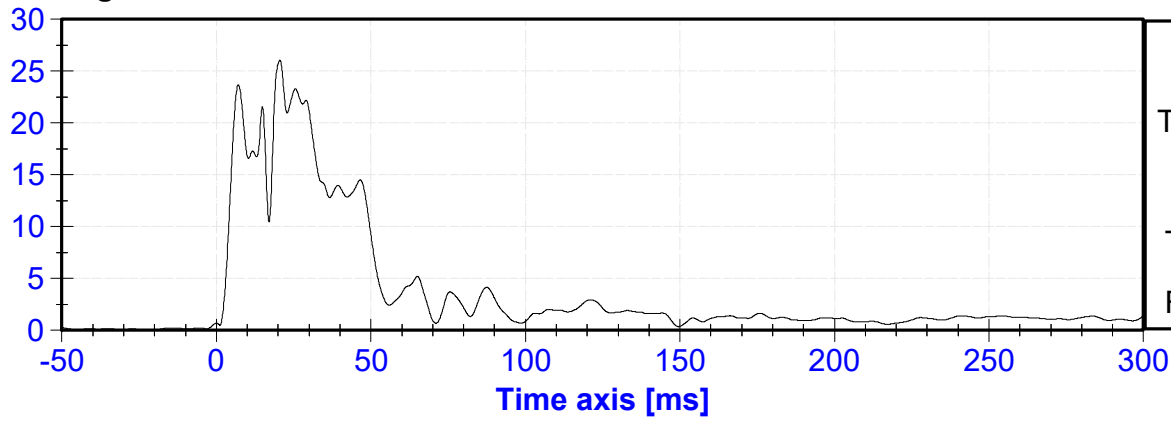


Rear Floorpan Above Axle (X) Acceleration vs. Time

ACCELERATION [g's]

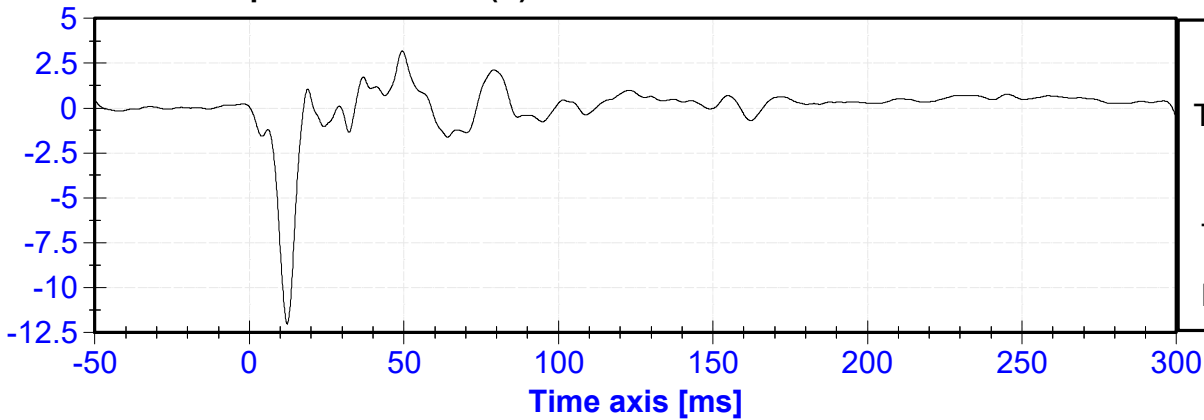


Rear Floorpan Above Axle (X) Velocity vs. Time


VELOCITY [m/s]

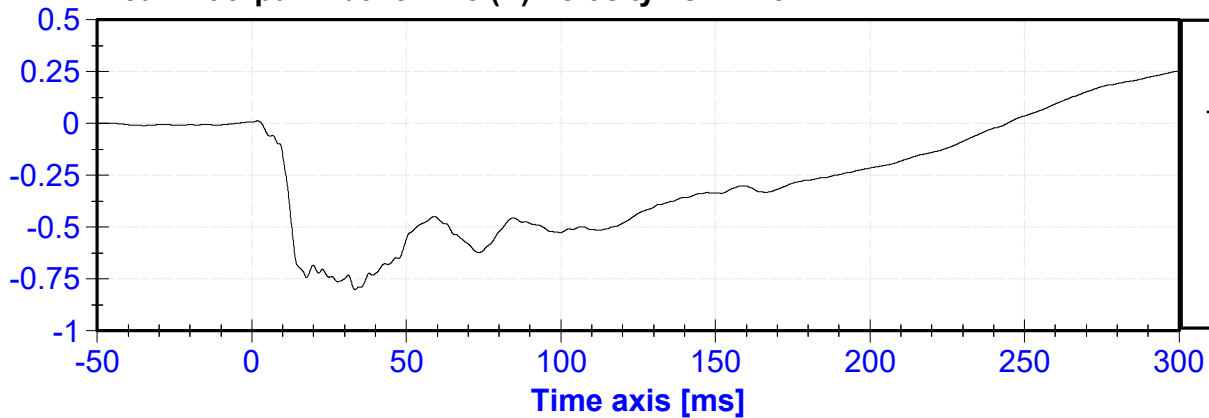


Rear Floorpan Above Axle (Y) Acceleration vs. Time

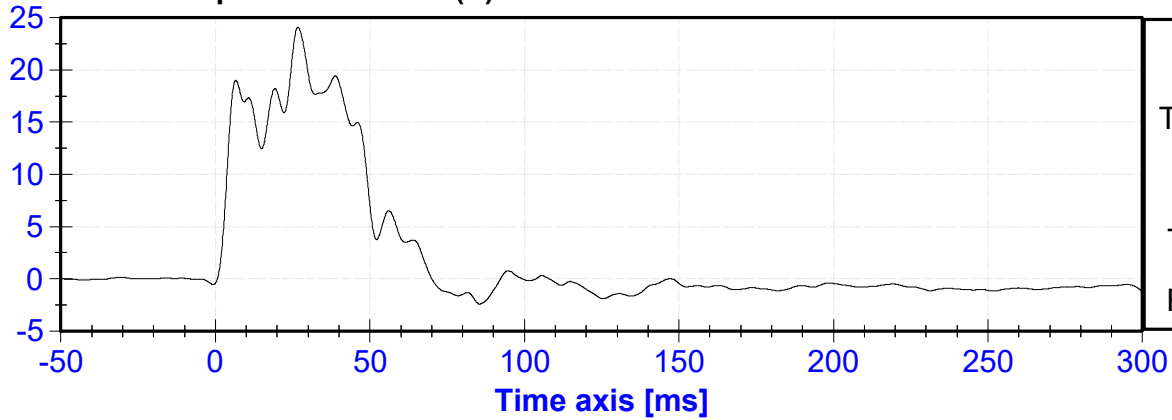


Rear Floorpan Above Axle (Y) Velocity vs. Time

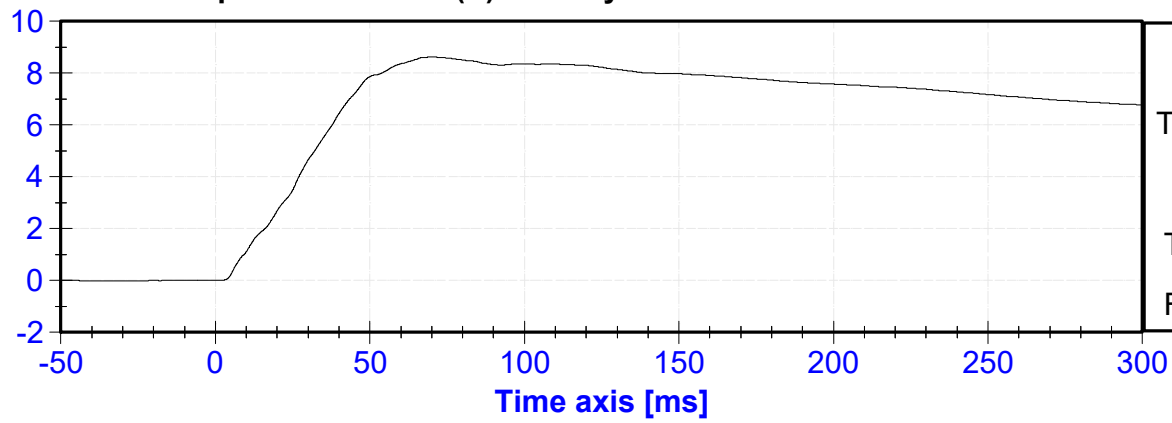


Rear Floorpan Above Axle (Z) Acceleration vs. Time

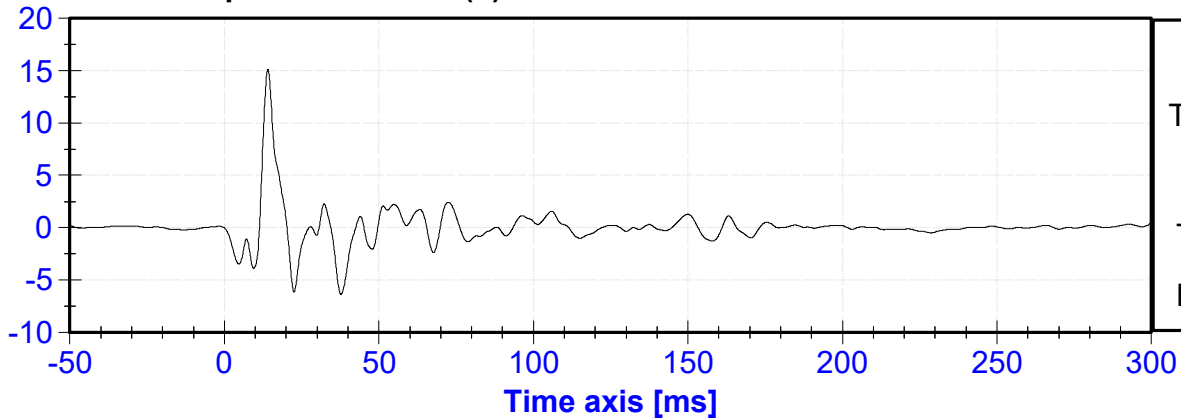


Rear Floorpan Above Axle (Z) Velocity vs. Time

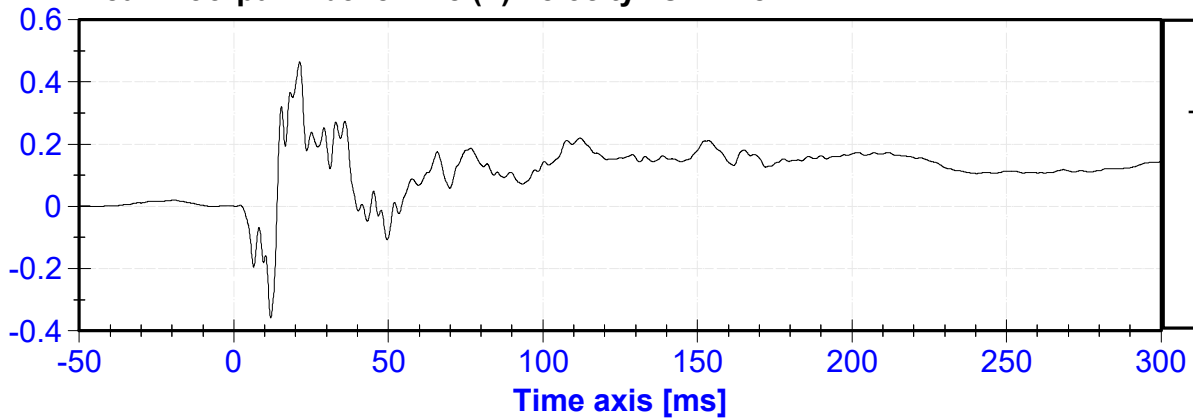


Rear Floorpan Above Axle Resultant Acceleration vs. Time

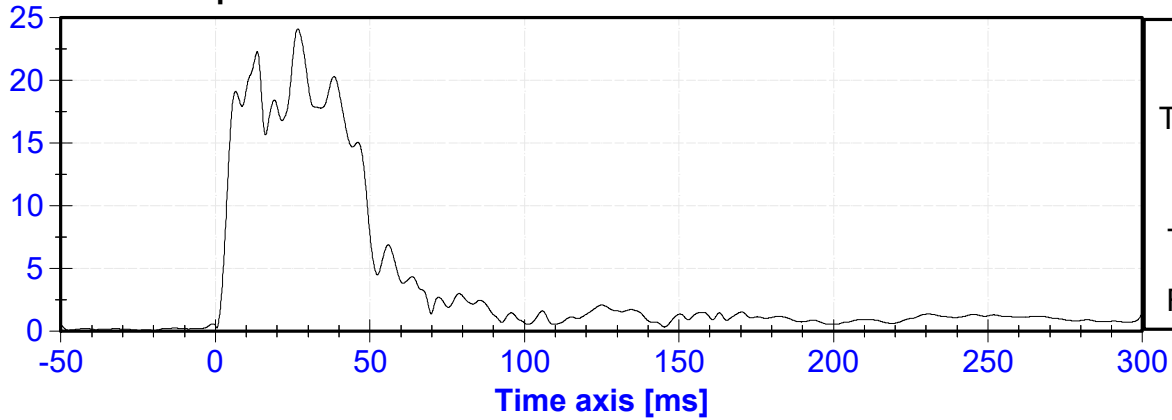


Left Sill at Rear Door (Y) Acceleration vs. Time

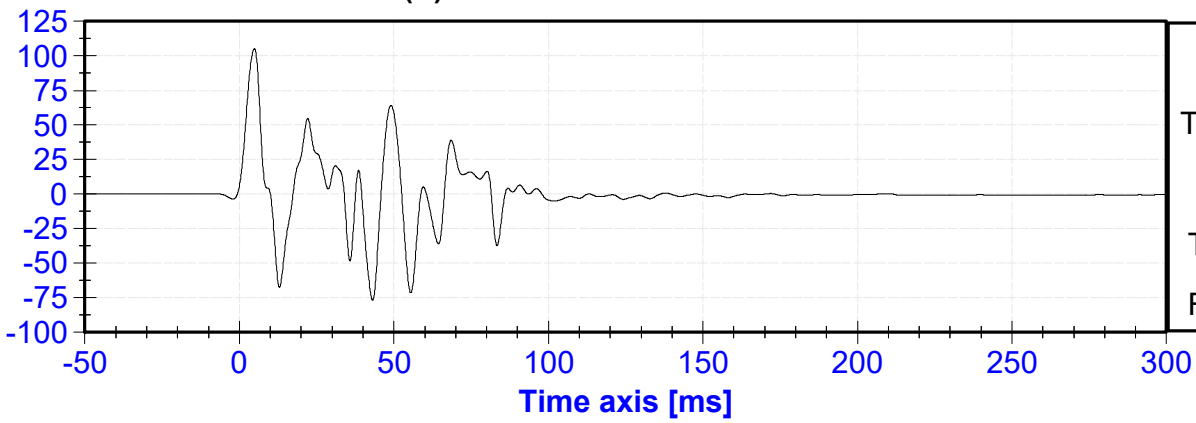

Left Sill at Rear Door (Y) Velocity vs. Time

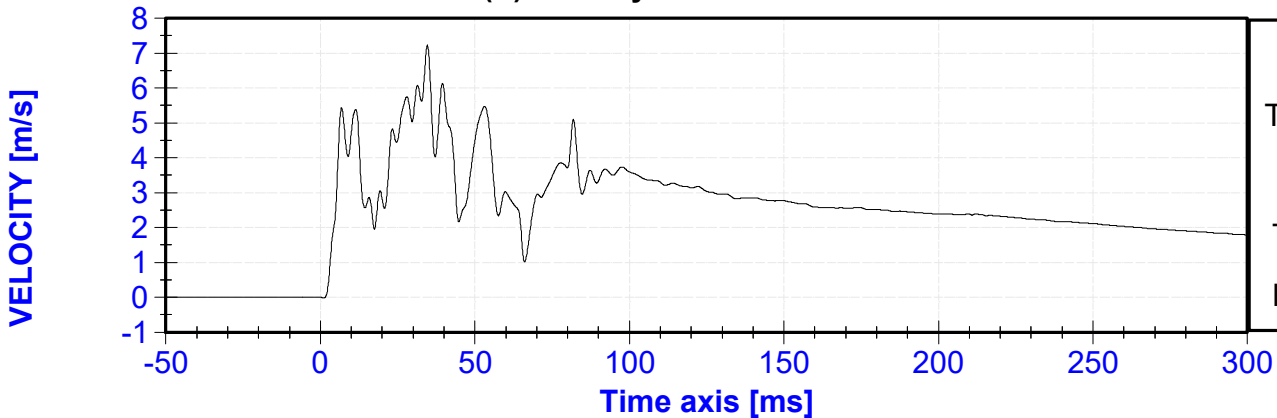


Left Sill at Front Door (Y) Acceleration vs. Time.

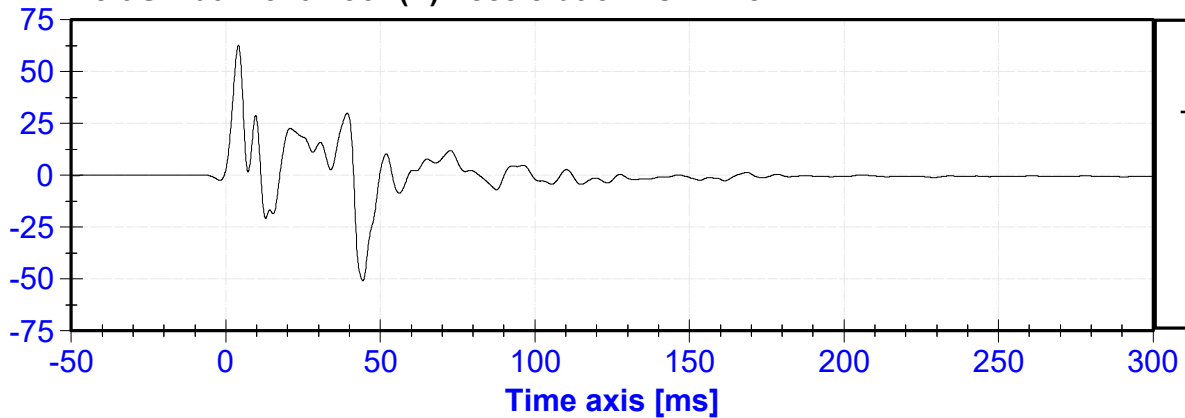


Left Sill at Front Door (Y) Velocity vs. Time

VELOCITY [m/s]

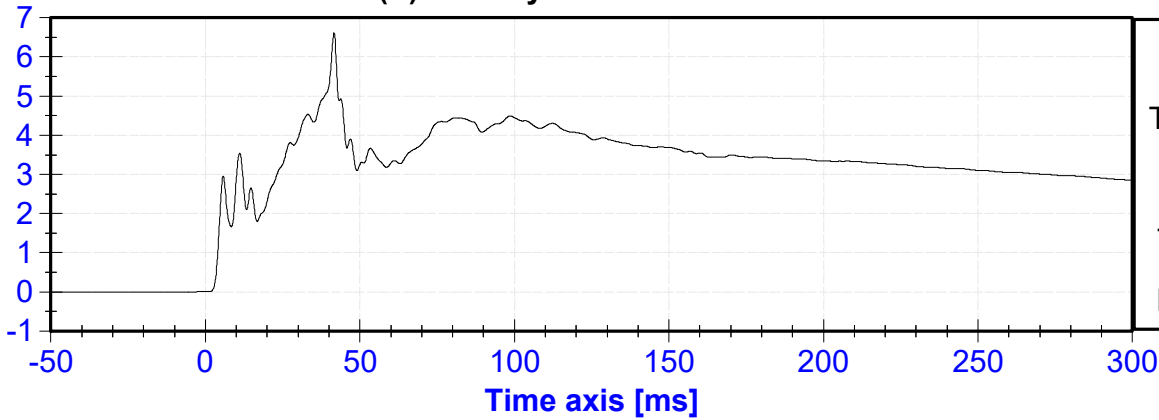


Right Rear Occ. Compartment(Y) Acceleration vs. Time

ACCELERATION [g's]

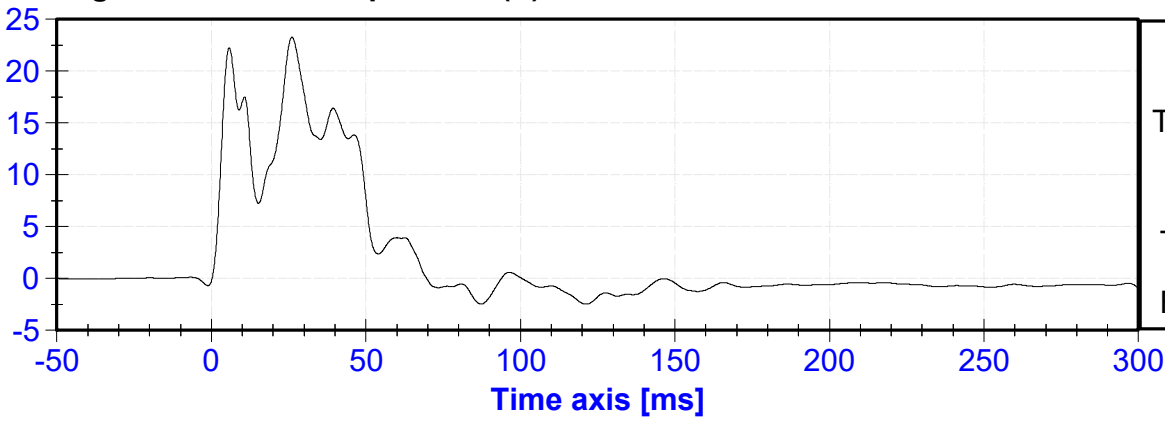

Right Rear Occ. Compartment(Y) Velocity vs. Time


VELOCITY [m/s]

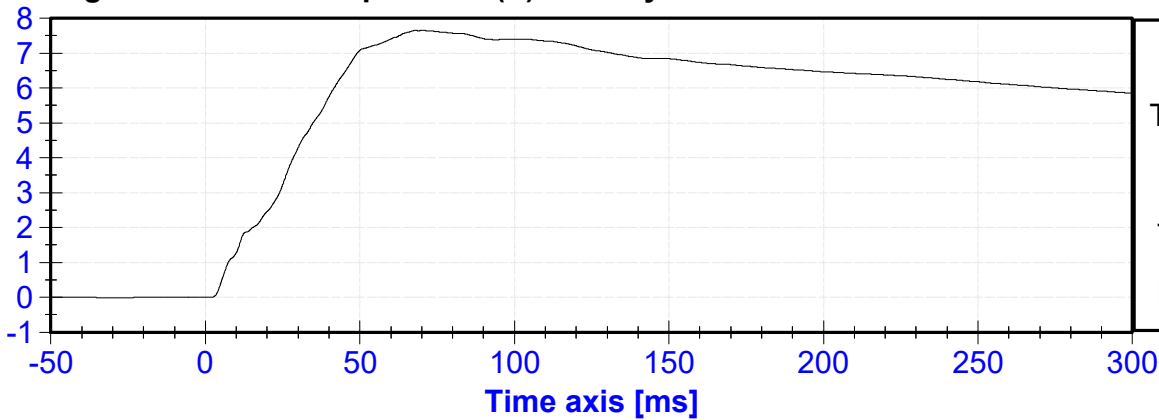

Exceeded calibration range and saturated at 9.4 ms

Left B-Post Lower (Y) Acceleration vs. Time


ACCELERATION [g's]

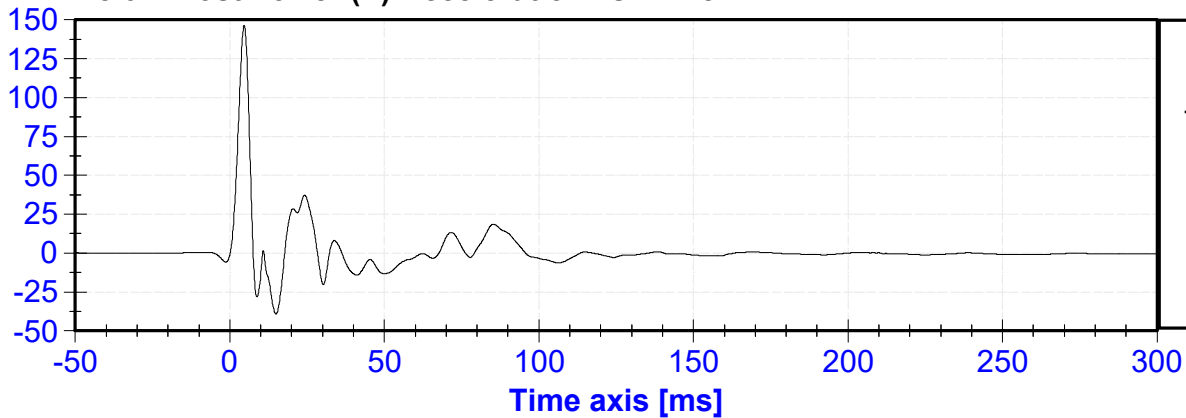

Exceeded calibration range and saturated at 9.4 ms

Left B-Post Lower (Y) Velocity vs. Time


VELOCITY [m/s]

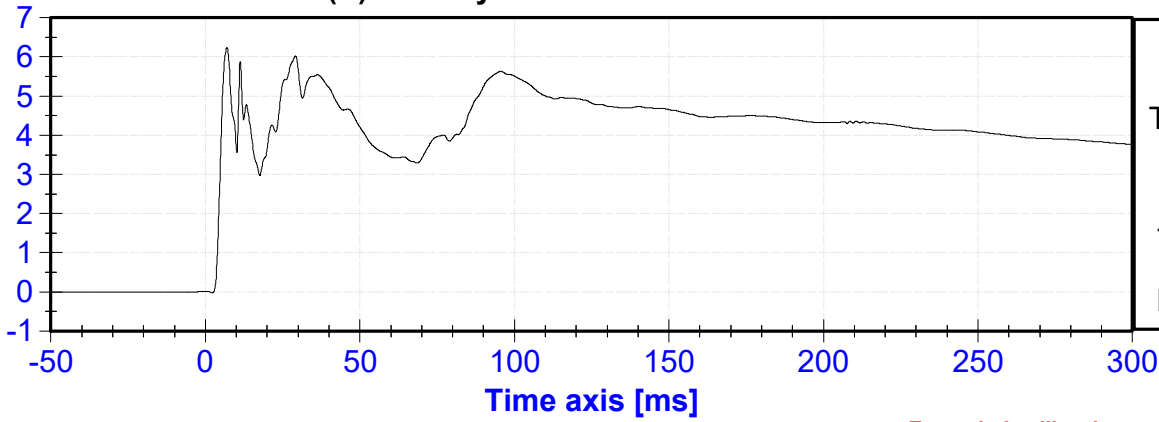

Exceeded calibration range and saturated at 10.2 ms

Left B-Post Middle (Y) Acceleration vs. Time


ACCELERATION [g's]

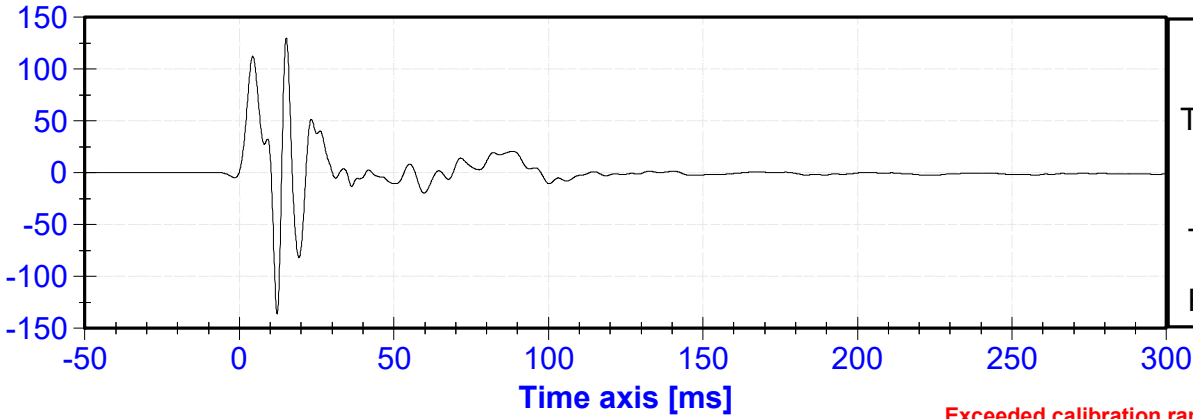

Exceeded calibration range and saturated at 10.2 ms


Left B-Post Middle (Y) Velocity vs. Time

VELOCITY [m/s]

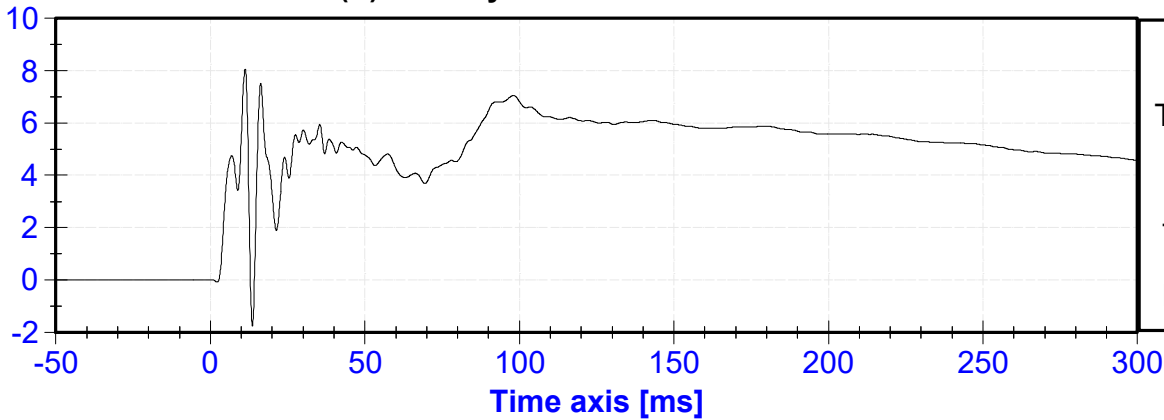


Left A-Post Lower (Y) Acceleration vs. Time

ACCELERATION [g's]

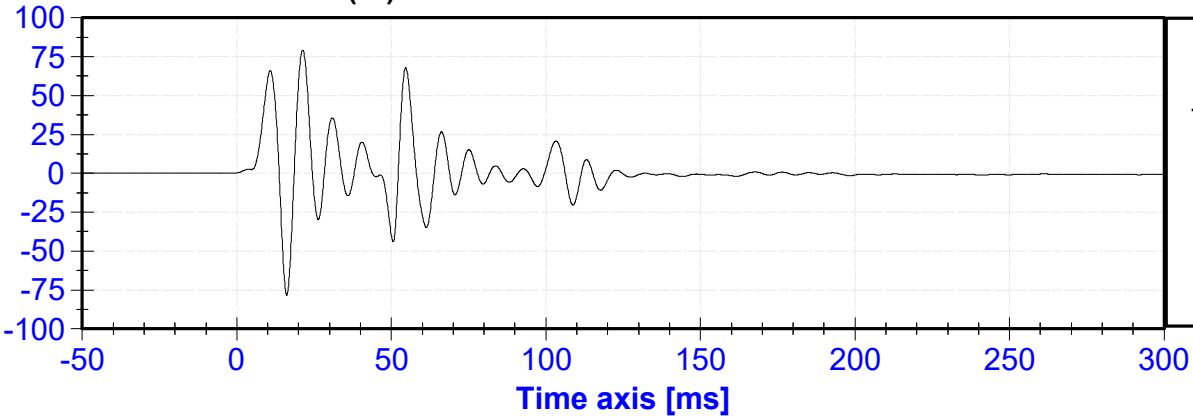

Left A-Post Lower (Y) Velocity vs. Time


VELOCITY [m/s]

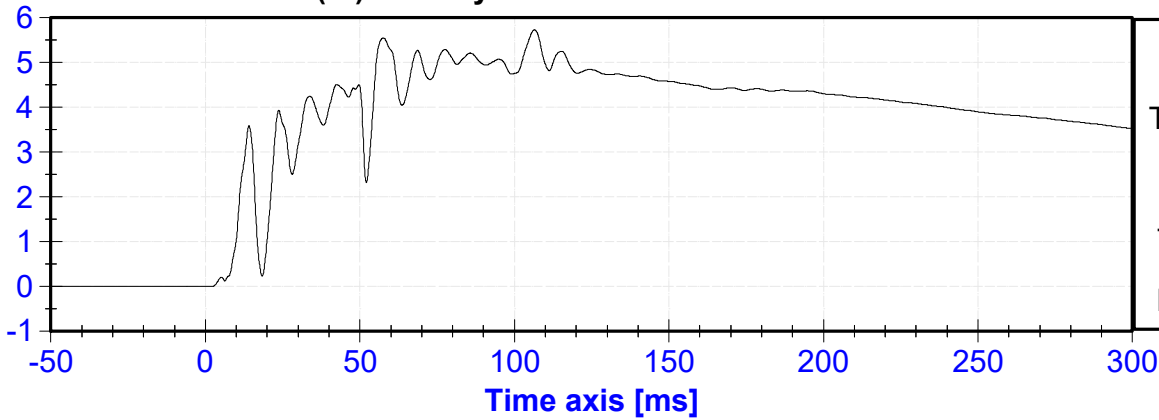

Exceeded calibration range at 23.4 ms

Left A-Post Middle (Y) Acceleration vs. Time


ACCELERATION [g's]

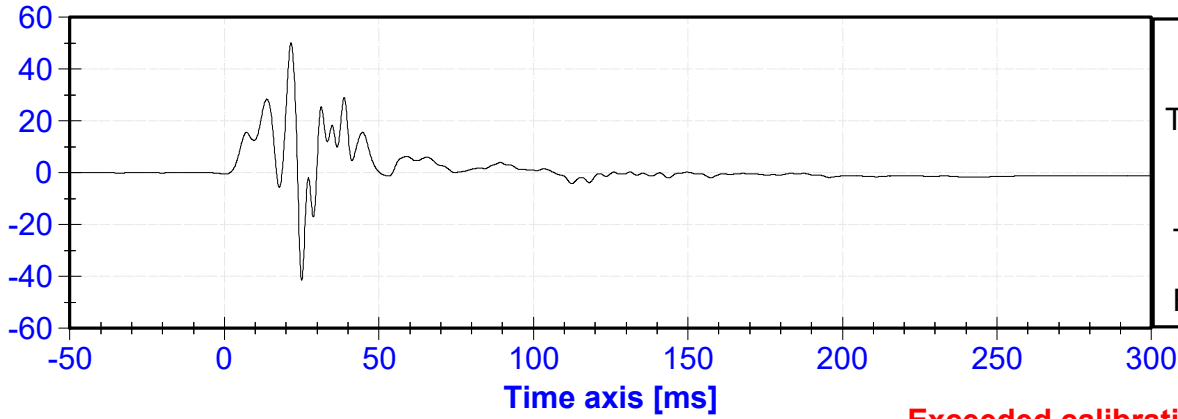

Exceeded calibration range at 23.4 ms


Left A-Post Middle (Y) Velocity vs. Time

VELOCITY [m/s]

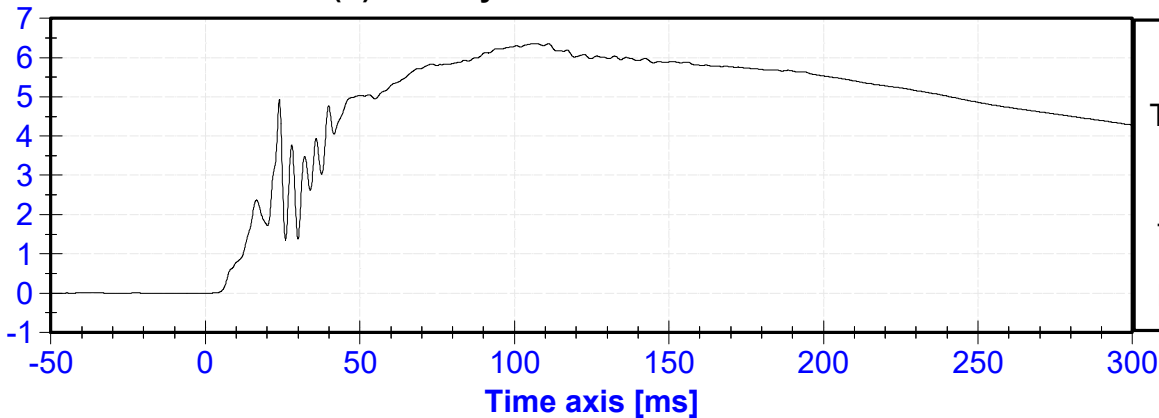


Front Seat Track (Y) Acceleration vs. Time

ACCELERATION [g's]

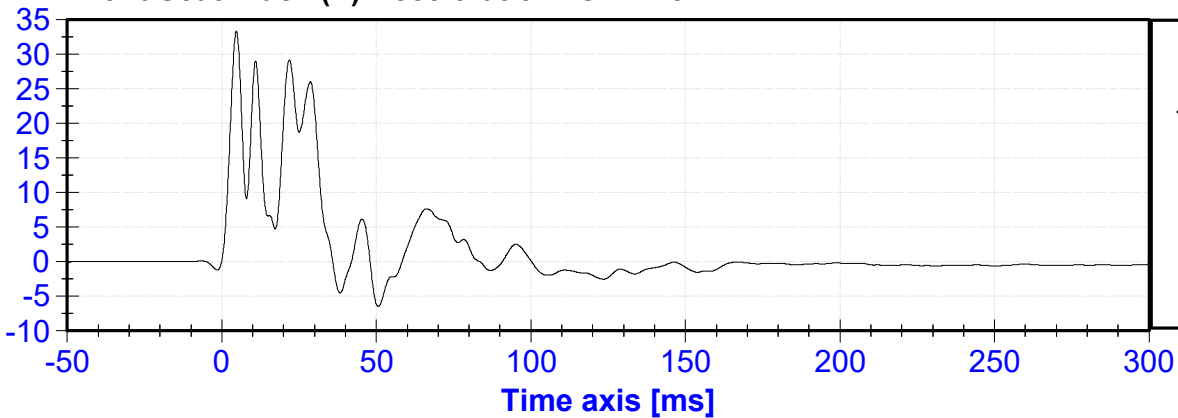


Front Seat Track (Y) Velocity vs. Time

VELOCITY [m/s]

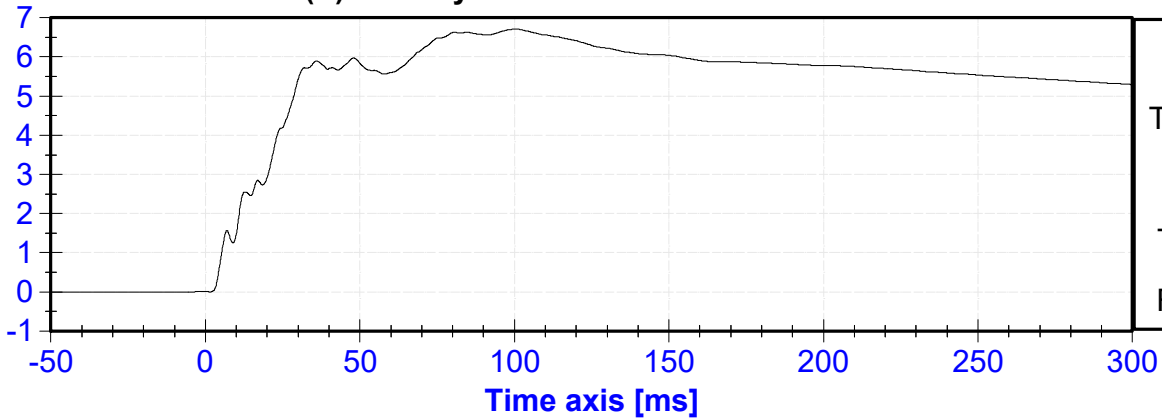


Rear Seat Track or Structure (Y) Acceleration vs. Time

ACCELERATION [g's]

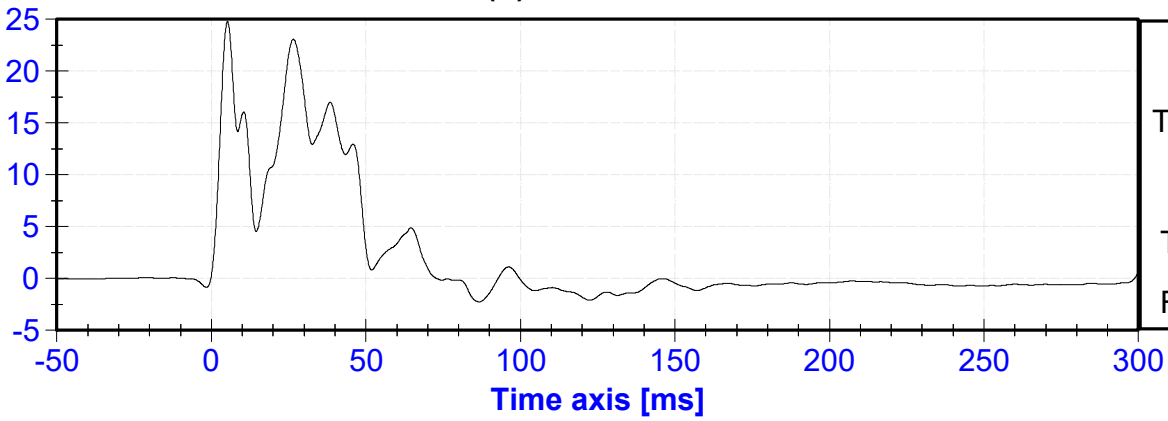


Rear Seat Track or Structure (Y) Velocity vs. Time

VELOCITY [m/s]

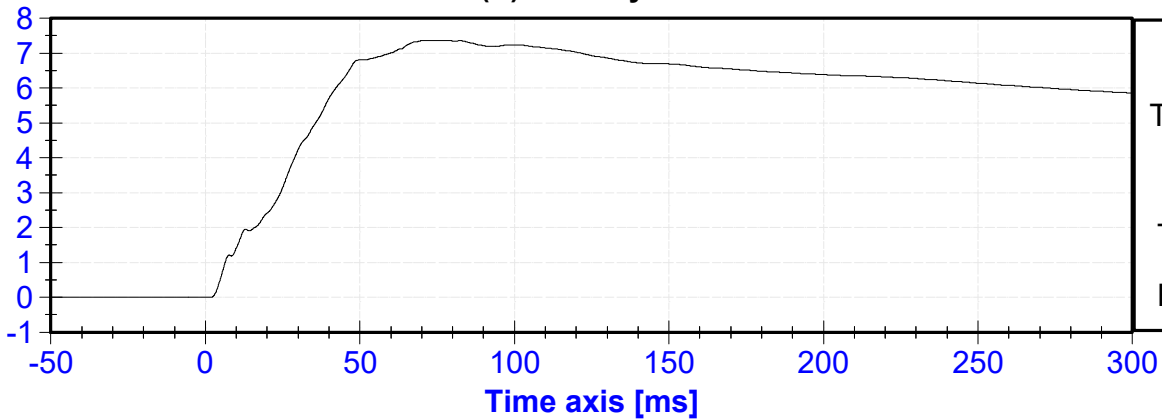


Vehicle CG (X) Acceleration vs. Time

ACCELERATION [g's]

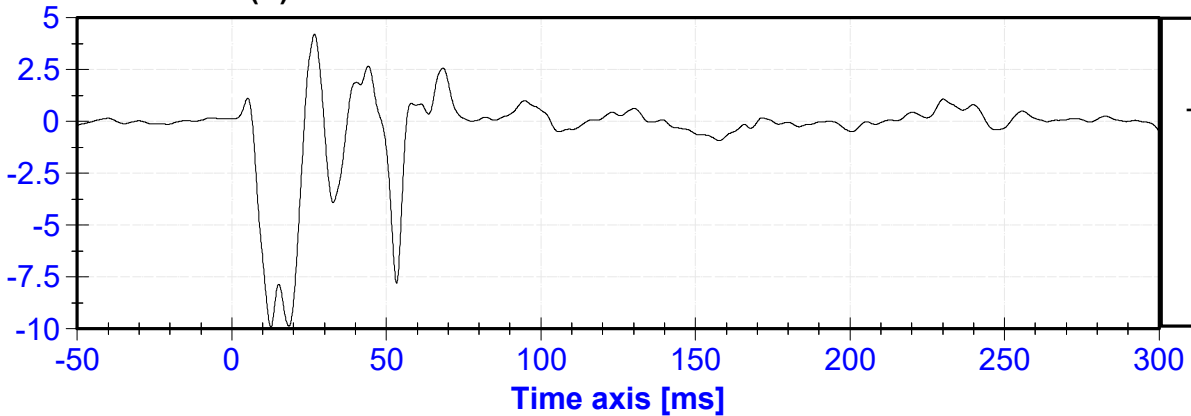


Vehicle CG (X) Velocity vs. Time

VELOCITY [m/s]

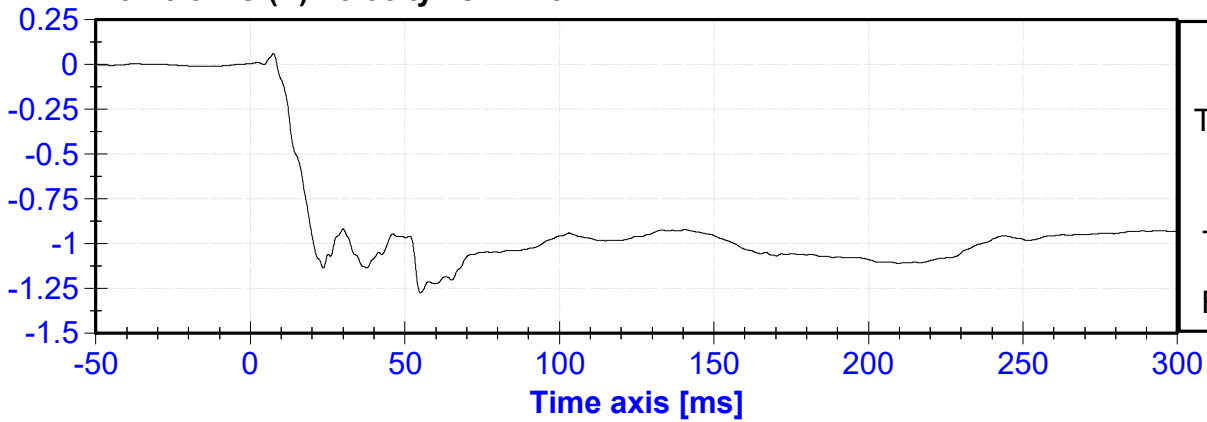


Vehicle CG (Y) Acceleration vs. Time

ACCELERATION [g's]

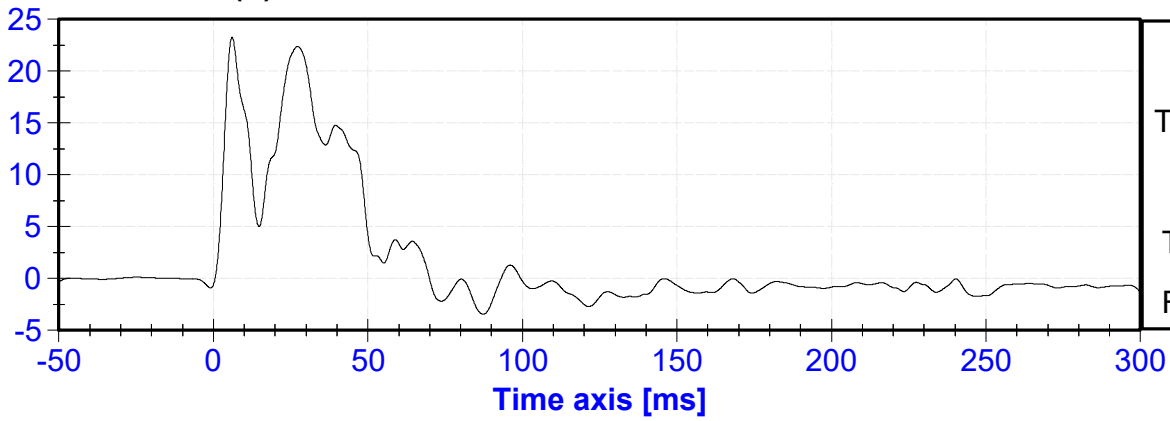


Vehicle CG (Y) Velocity vs. Time

VELOCITY [m/s]

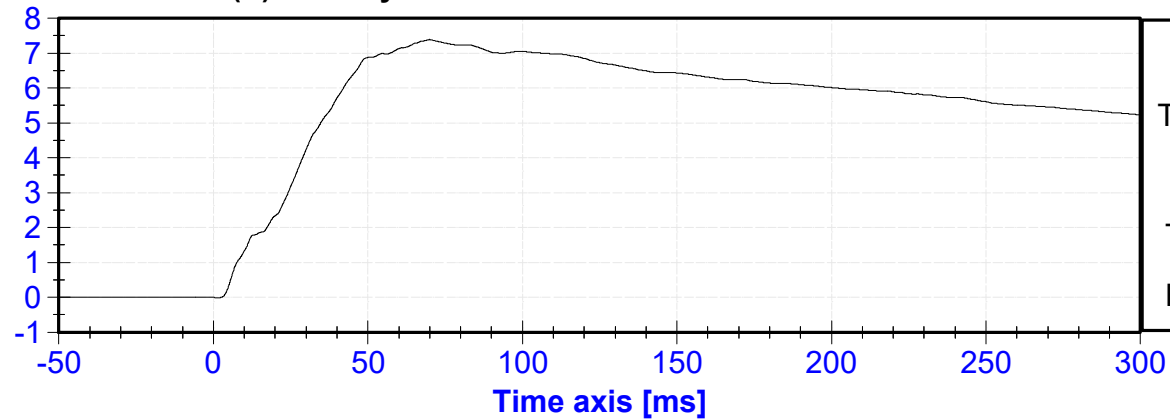


Vehicle CG (Z) Acceleration vs. Time

ACCELERATION [g's]

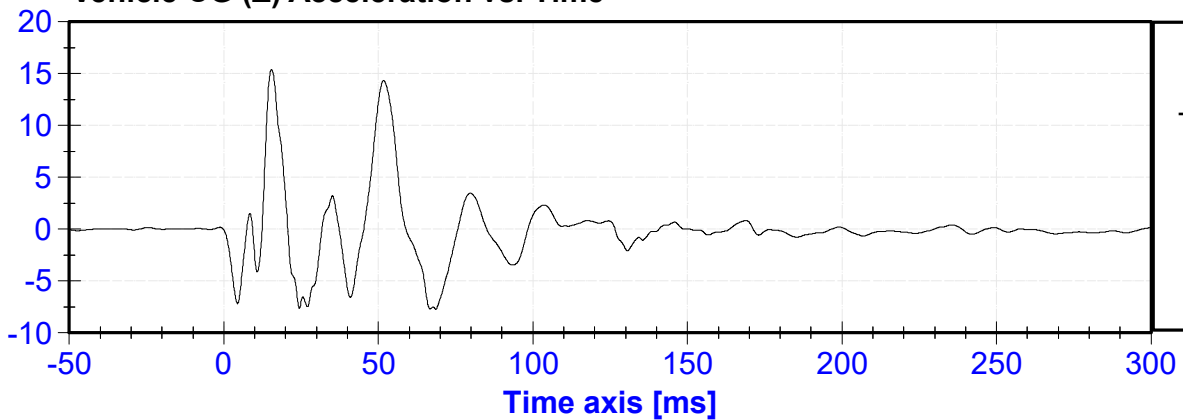


Vehicle CG (Z) Velocity vs. Time

VELOCITY [m/s]

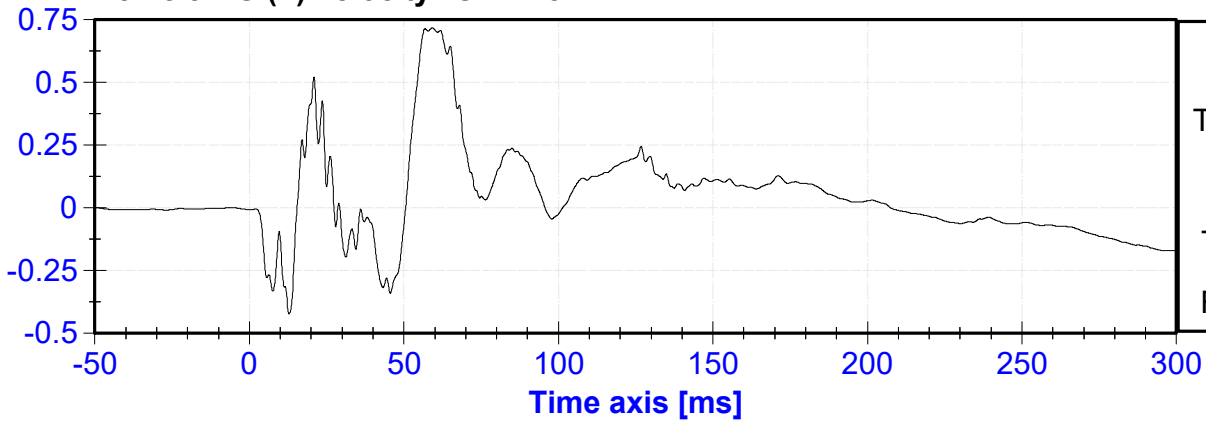


Vehicle CG Resultant Acceleration vs. Time

ACCELERATION [g's]

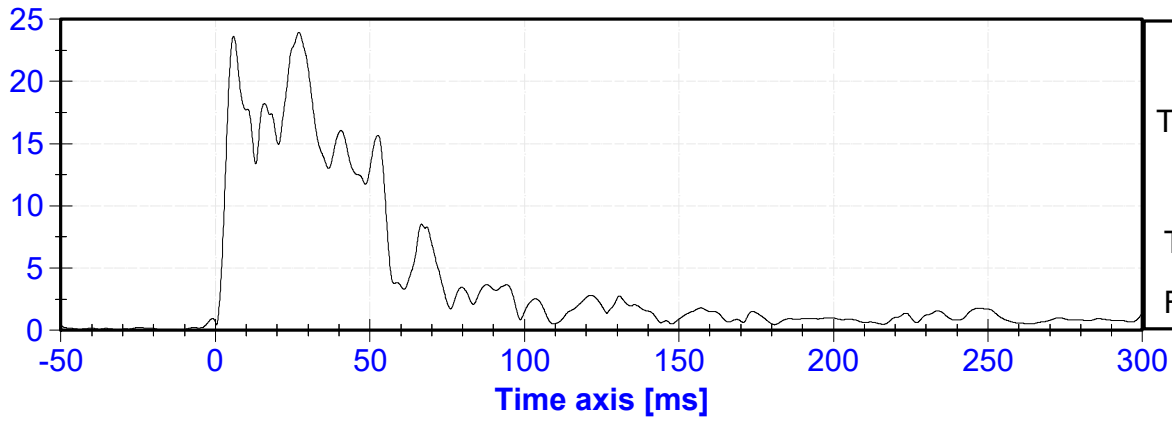


MDB Center of Gravity (X) Acceleration vs. Time

ACCELERATION [g's]

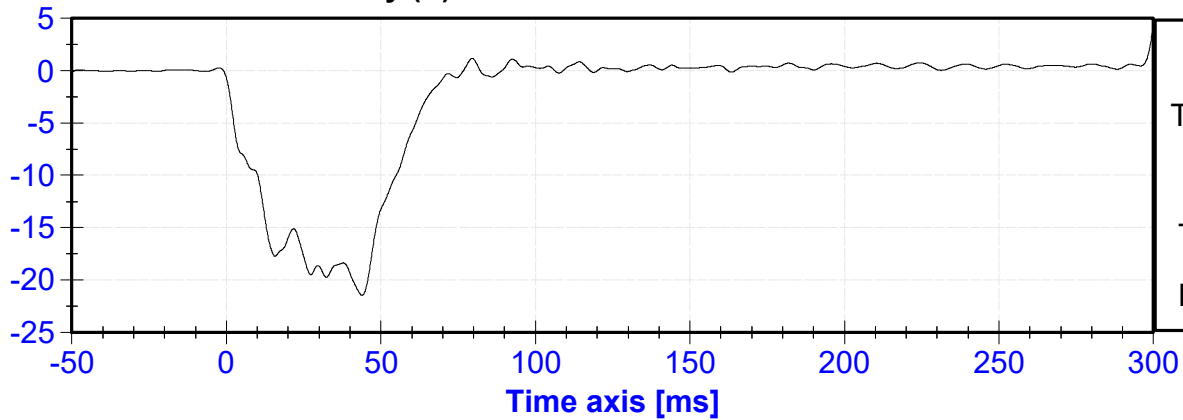


MDB Center of Gravity (X) Velocity vs. Time

VELOCITY [m/s]

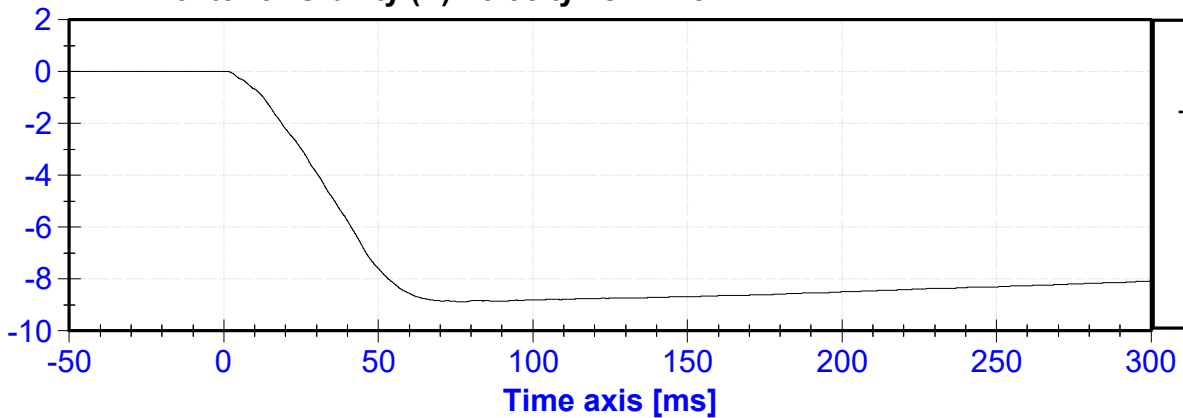


MDB Center of Gravity (Y) Acceleration vs. Time

ACCELERATION [g's]

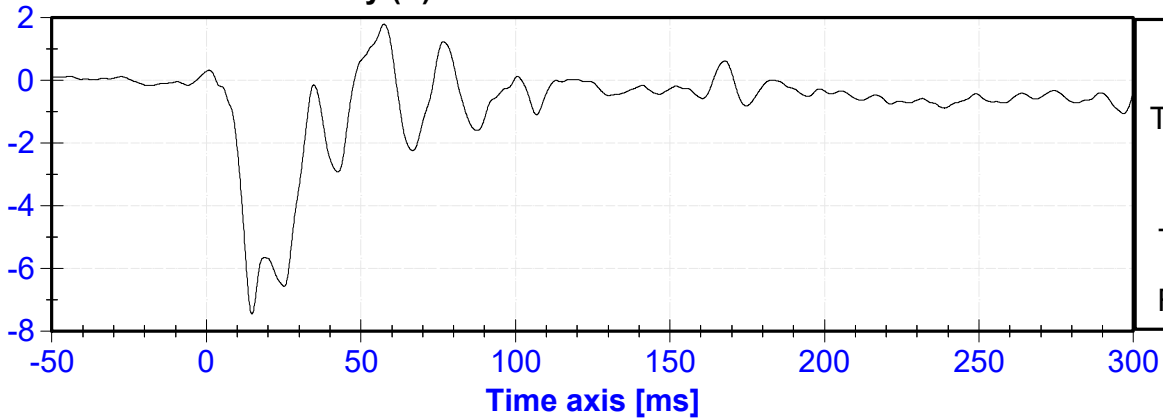


MDB Center of Gravity (Y) Velocity vs. Time

VELOCITY [m/s]

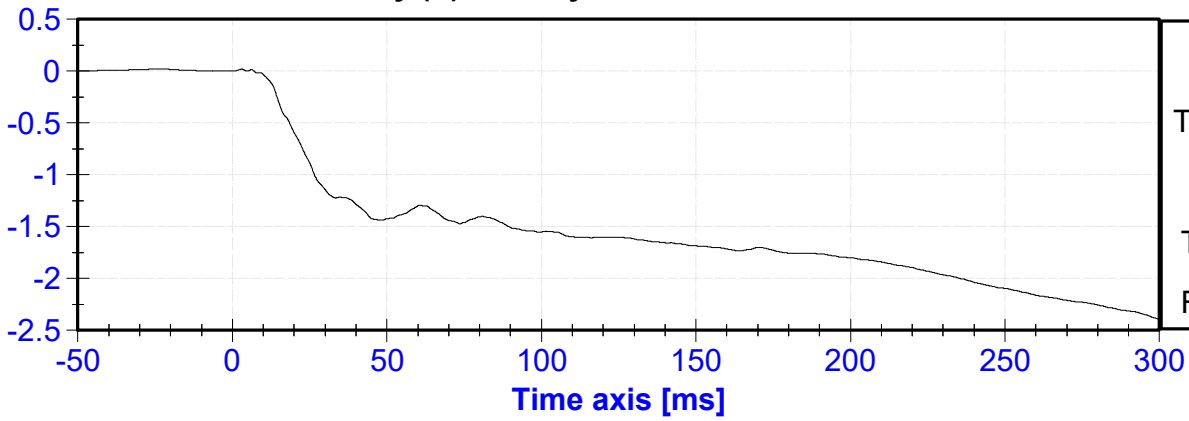


MDB Center of Gravity (Z) Acceleration vs. Time

ACCELERATION [g's]

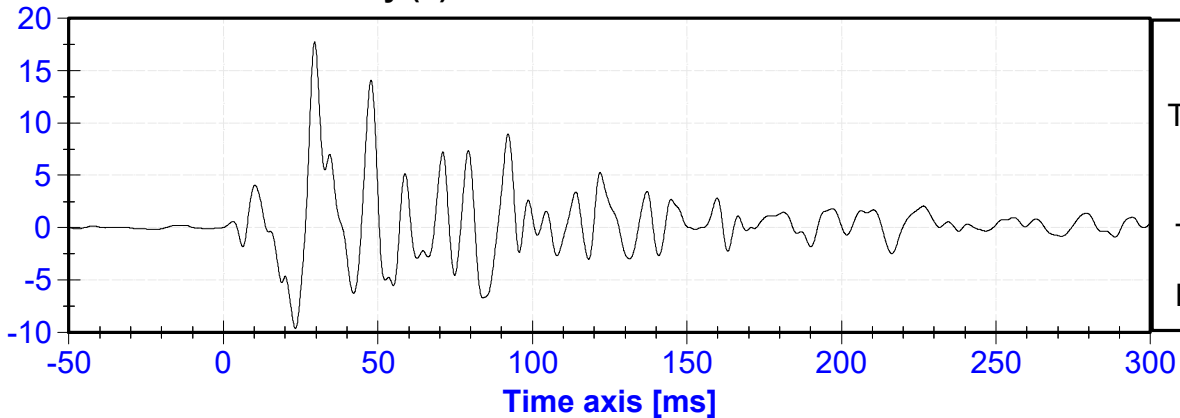


MDB Center of Gravity (Z) Velocity vs. Time


VELOCITY [m/s]

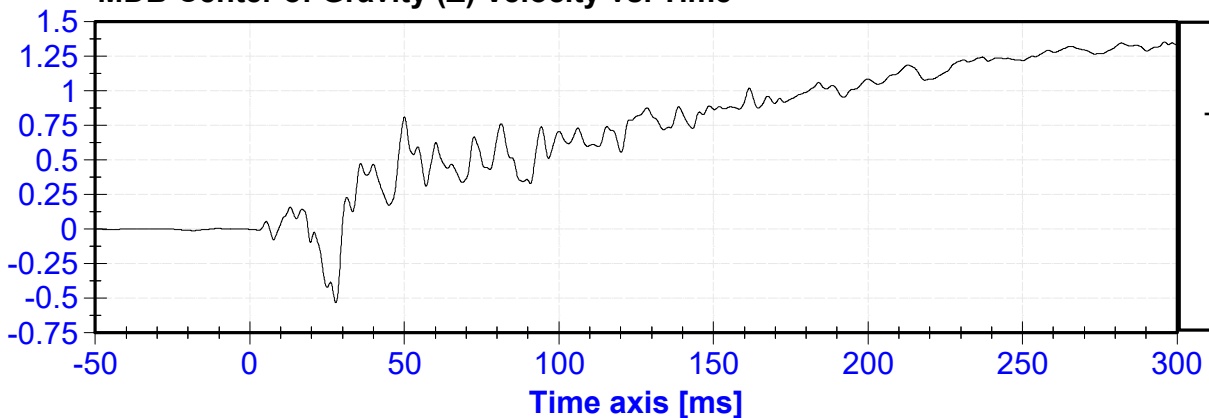


MDB Center of Gravity Resultant Acceleration vs. Time

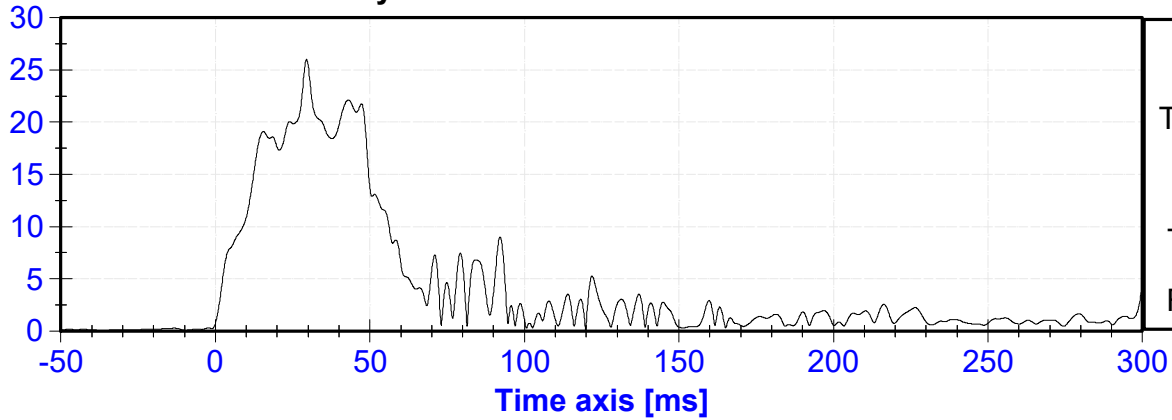


MDB Rear (X) Acceleration vs. Time

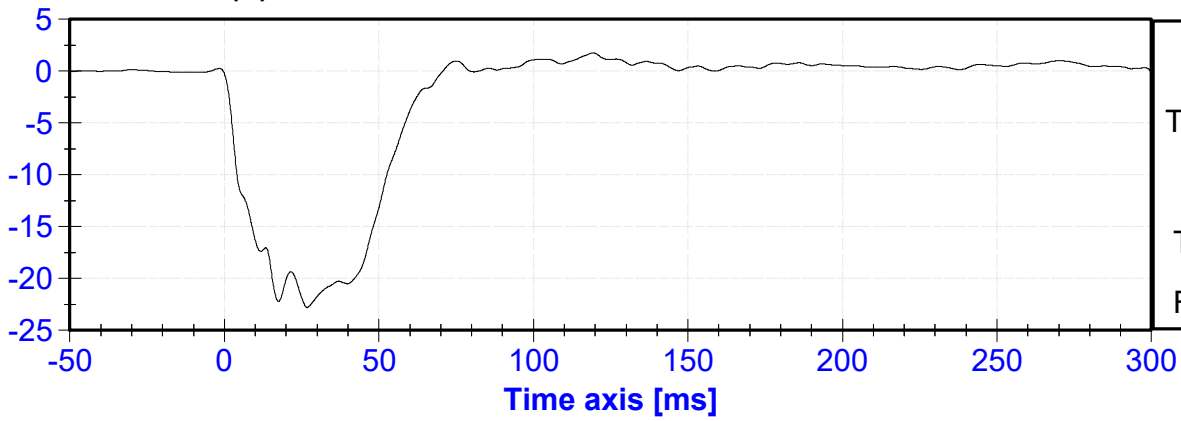


MDB Rear (X) Velocity vs. Time

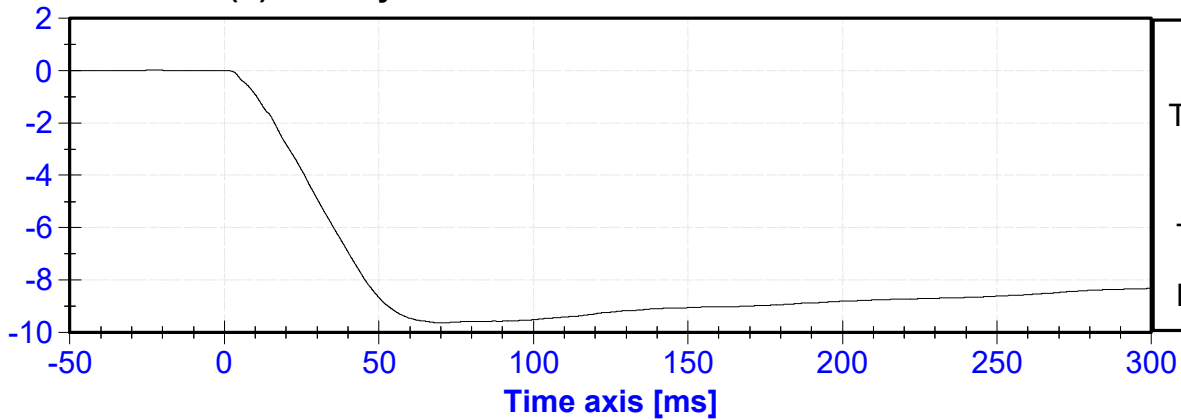

MDB Rear (Y) Acceleration vs. Time

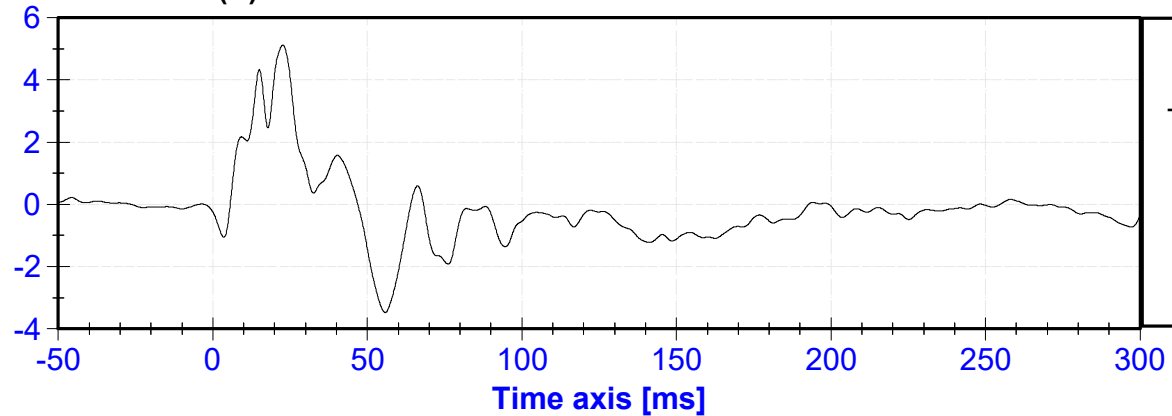

MDB Rear (Y) Velocity vs. Time

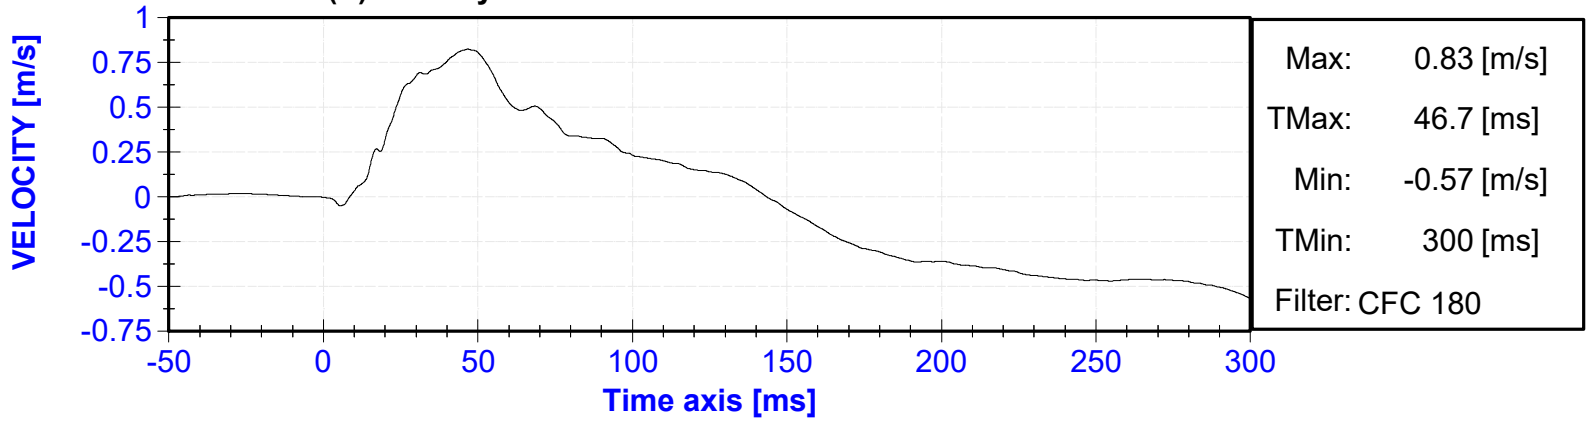

APPENDIX V


**PRE-TEST
ES-2re PERFORMANCE CALIBRATION TEST DATA**

External Measurements - EuroSID-2re

Technician: K. Brogan

Date: 11/08/2022

Dummy Serial Number: D037

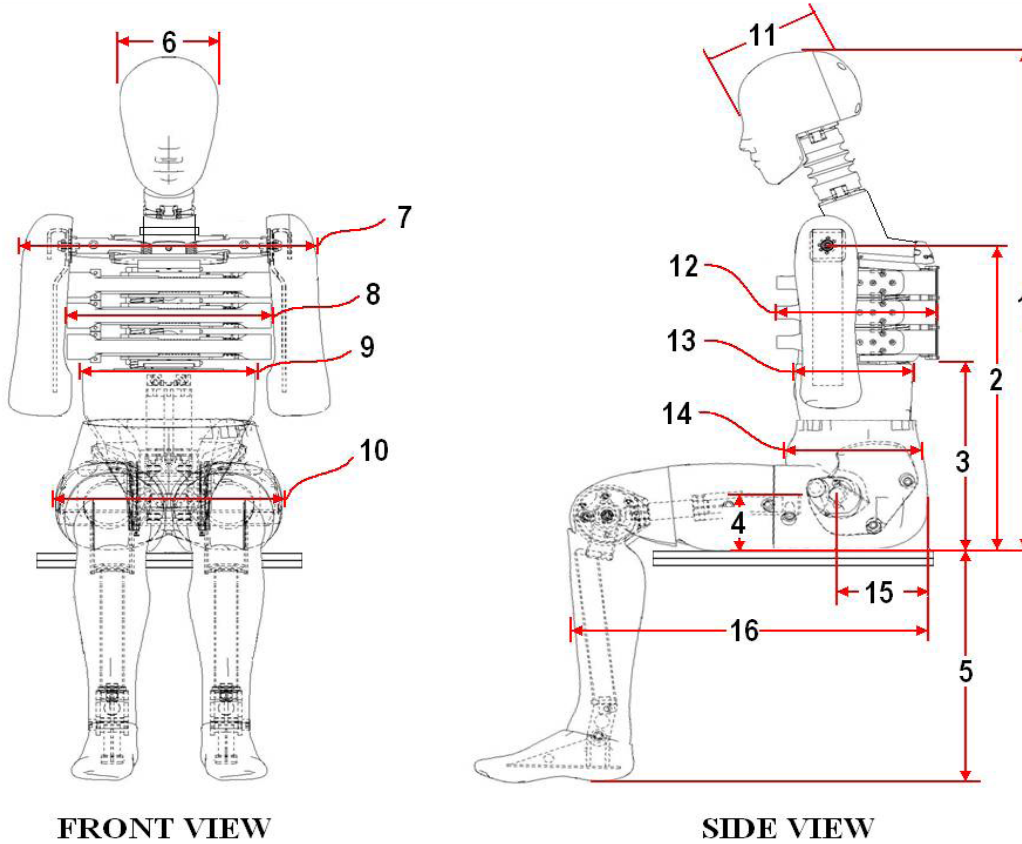

FRONT VIEW

SIDE VIEW

| Dim. No. | Description | Specification (mm) | | Result (mm) | Pass/Fail |
|----------|--|--------------------|-----|-------------|-----------|
| 1 | Sitting Height | 900 | 918 | 914 | Pass |
| 2 | Seat to Shoulder Joint | 558 | 572 | 564 | Pass |
| 3 | Seat to Lower Face of Thoracic Spine Box | 346 | 356 | 353 | Pass |
| 4 | Seat to Hip Joint (center of bolt) | 97 | 103 | 101 | Pass |
| 5 | Sole to Seat, Sitting | 333 | 451 | 422 | Pass |
| 6 | Head Width | 152 | 158 | 155 | Pass |
| 7 | Shoulder/Arm Width | 461 | 479 | 471 | Pass |
| 8 | Thorax Width | 322 | 332 | 330 | Pass |
| 9 | Abdomen Width | 273 | 287 | 280 | Pass |
| 10 | Pelvis Lap Width | 359 | 373 | 365 | Pass |
| 11 | Head Depth | 196 | 206 | 197 | Pass |
| 12 | Thorax Depth | 262 | 272 | 268 | Pass |
| 13 | Abdomen Depth | 194 | 204 | 201 | Pass |
| 14 | Pelvis Depth | 235 | 245 | 241 | Pass |
| 15 | Back of Buttocks to Hip Joint (center of bolt) | 150 | 160 | 155 | Pass |
| 16 | Back of Buttocks to Front Knee | 597 | 615 | 609 | Pass |

| | | | |
|-------------------|--------|-----------------------|------------|
| ATD Manufacturer | Denton | Test Technician | D. Kroll |
| ATD Serial Number | D037 | Laboratory Supervisor | C. Mantell |


Results




| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|------------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.9 | Pass |
| Humidity | 10 | 70 | % | 40.5 | Pass |
| Resultant Acceleration | 125 | 155 | g's | 135.0 | Pass |
| Oscillation | 0 | 15 | % | 1.84 | Pass |
| Fore-Aft Acceleration | -15 | 15 | g's | 8.1 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|--------------|---------------|------------------|----------------------|
| X Accelerometer | Endevco | T21724 | 9/6/2022 | 3/5/2023 |
| Y Accelerometer | Endevco | T22281 | 9/6/2022 | 3/5/2023 |
| Z Accelerometer | Endevco | T26050 | 9/9/2022 | 3/8/2023 |

Resultant Acceleration

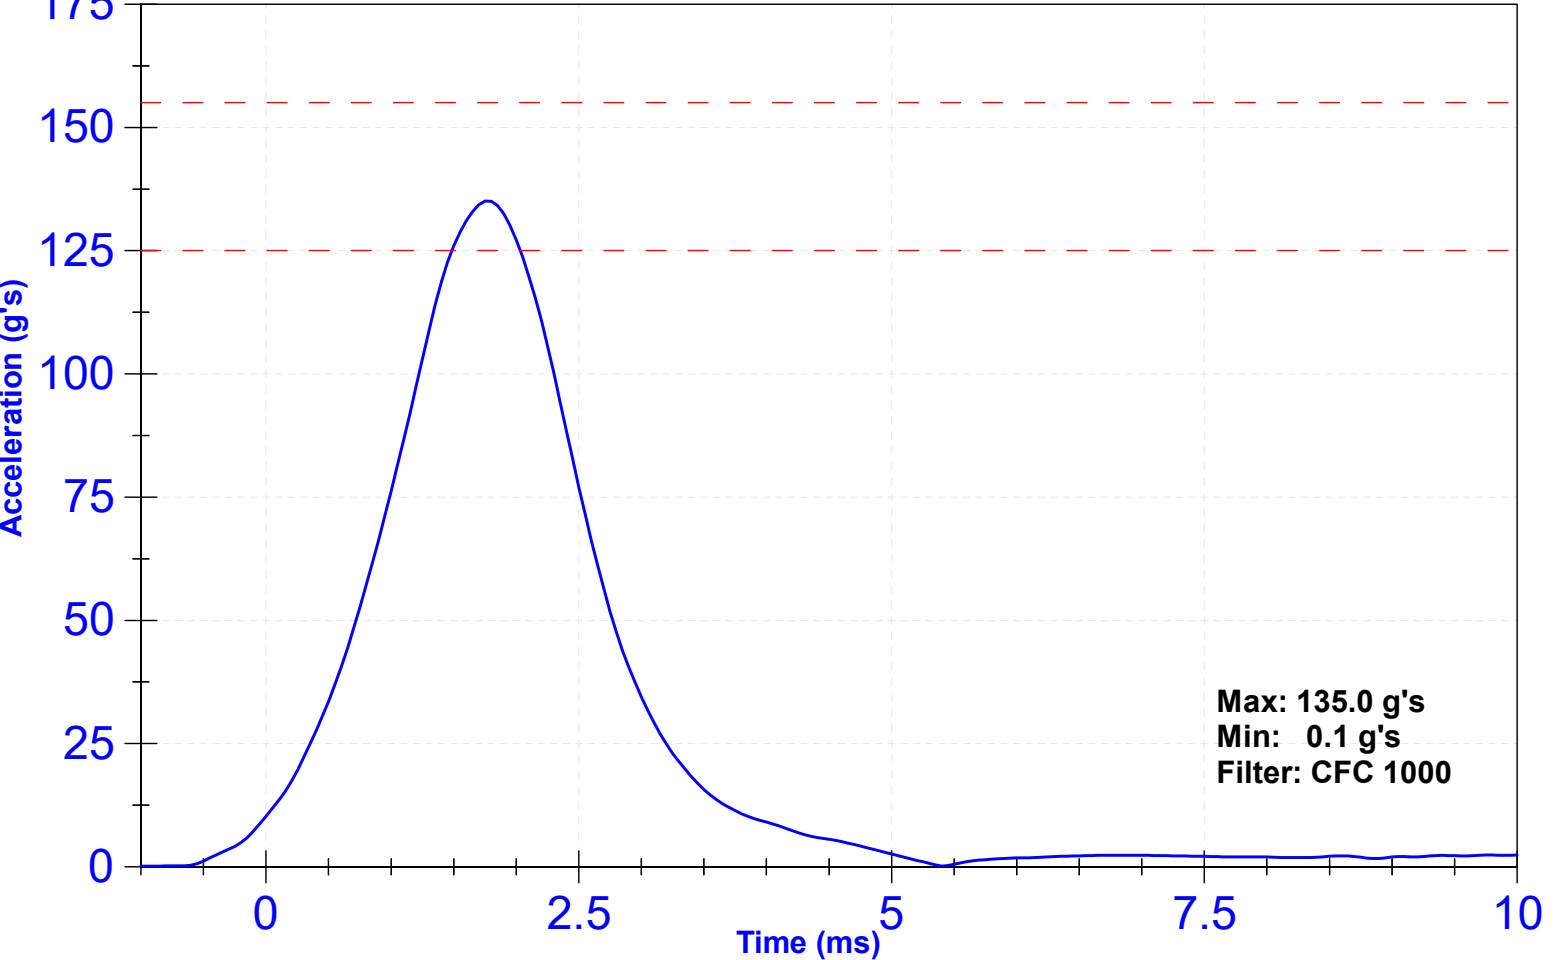

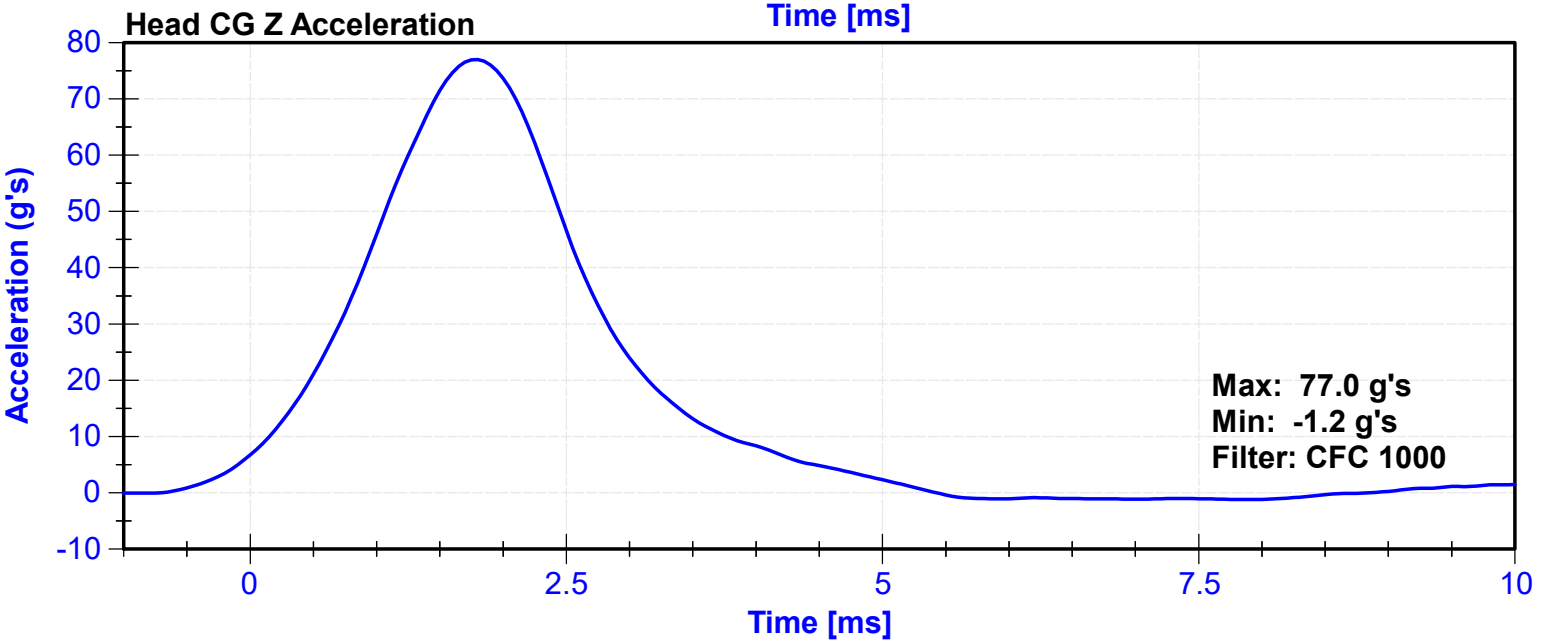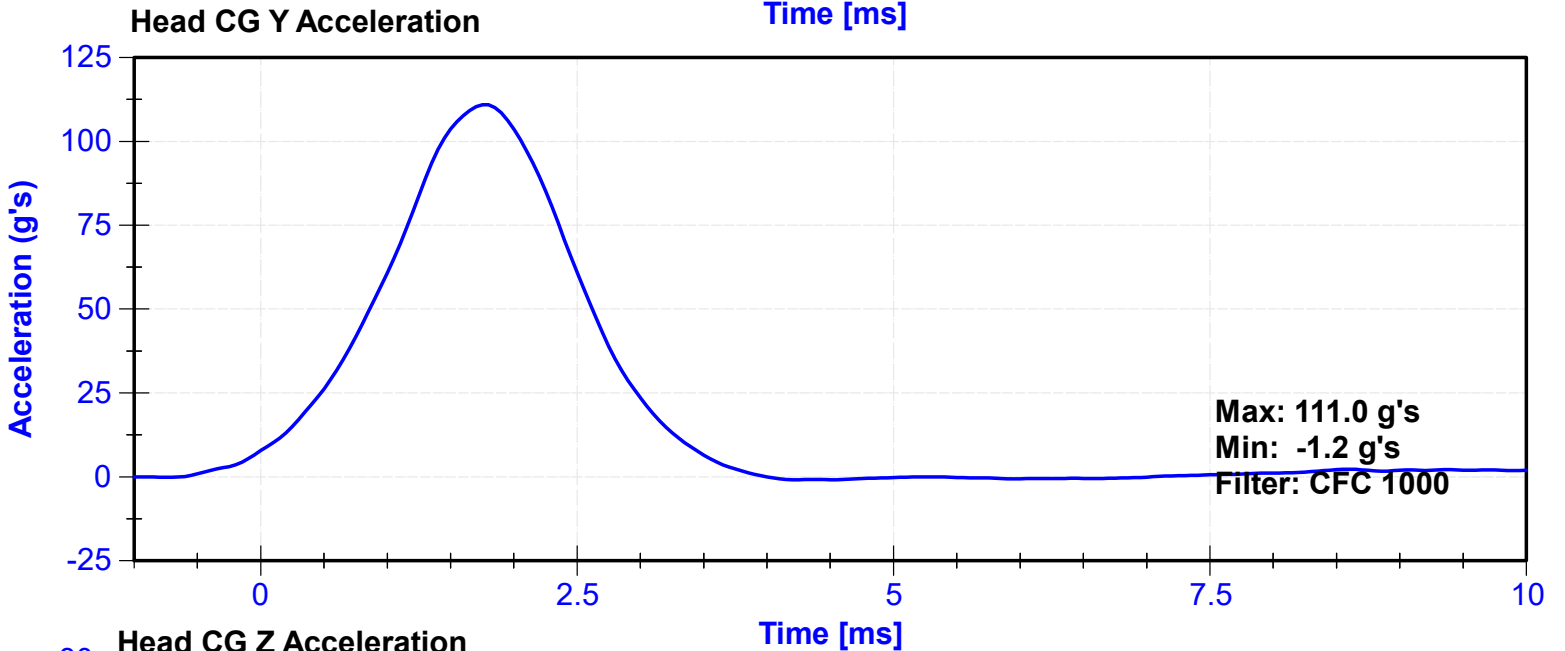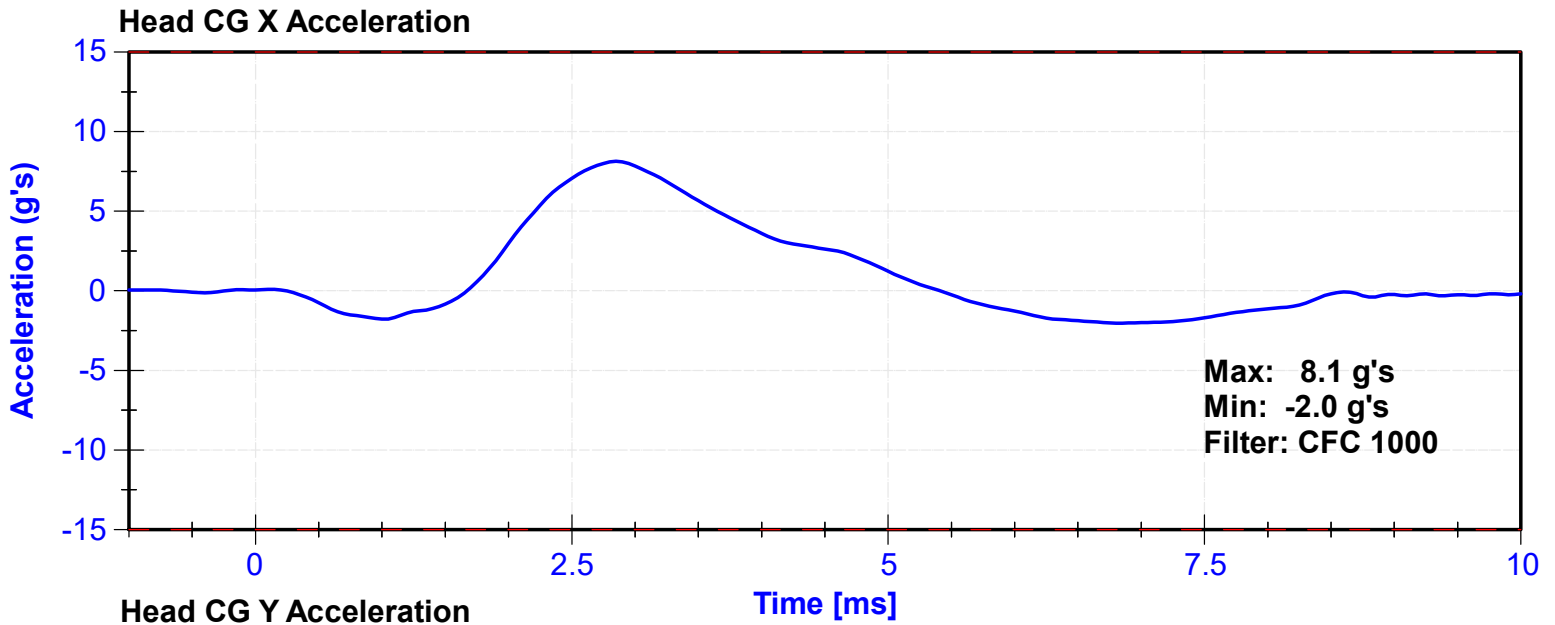


| | | | |
|-------------------|--------|-----------------------|------------|
| ATD Manufacturer | Denton | Test Technician | C. Mantell |
| ATD Serial Number | D037 | Laboratory Supervisor | K. Brogan |

Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|-------------------------------------|-----------------------------|-----------------------------|------|-----------------------|-----------|
| Temperature | 20.6 | 22.2 | °C | 22.0 | Pass |
| Humidity | 10 | 70 | % | 30 | Pass |
| Velocity | 3.3 | 3.5 | m/s | 3.40 | Pass |
| Lateral Neck Rotation | 49 | 59 | deg | 53.8 | Pass |
| Time at Maximum Rotation | 54 | 66 | ms | 56.2 | Pass |
| Time of Rotation Decay from Maximum | 53 | 88 | ms | 59.3 | Pass |
| Pendulum Velocity Overall Corridor | Lower Boundary ¹ | Upper Boundary ² | m/s | See Plot ³ | Pass |


Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|------------------------------|--------------|---------------|------------------|----------------------|
| Pendulum Accelerometer | Endevco | C16503 | 10/26/2022 | 10/26/2023 |
| Front Pendulum Potentiometer | Sfernice | 094 | 10/5/2022 | 10/5/2023 |
| Headform Potentiometer | Sfernice | 095 | 10/5/2022 | 10/5/2023 |

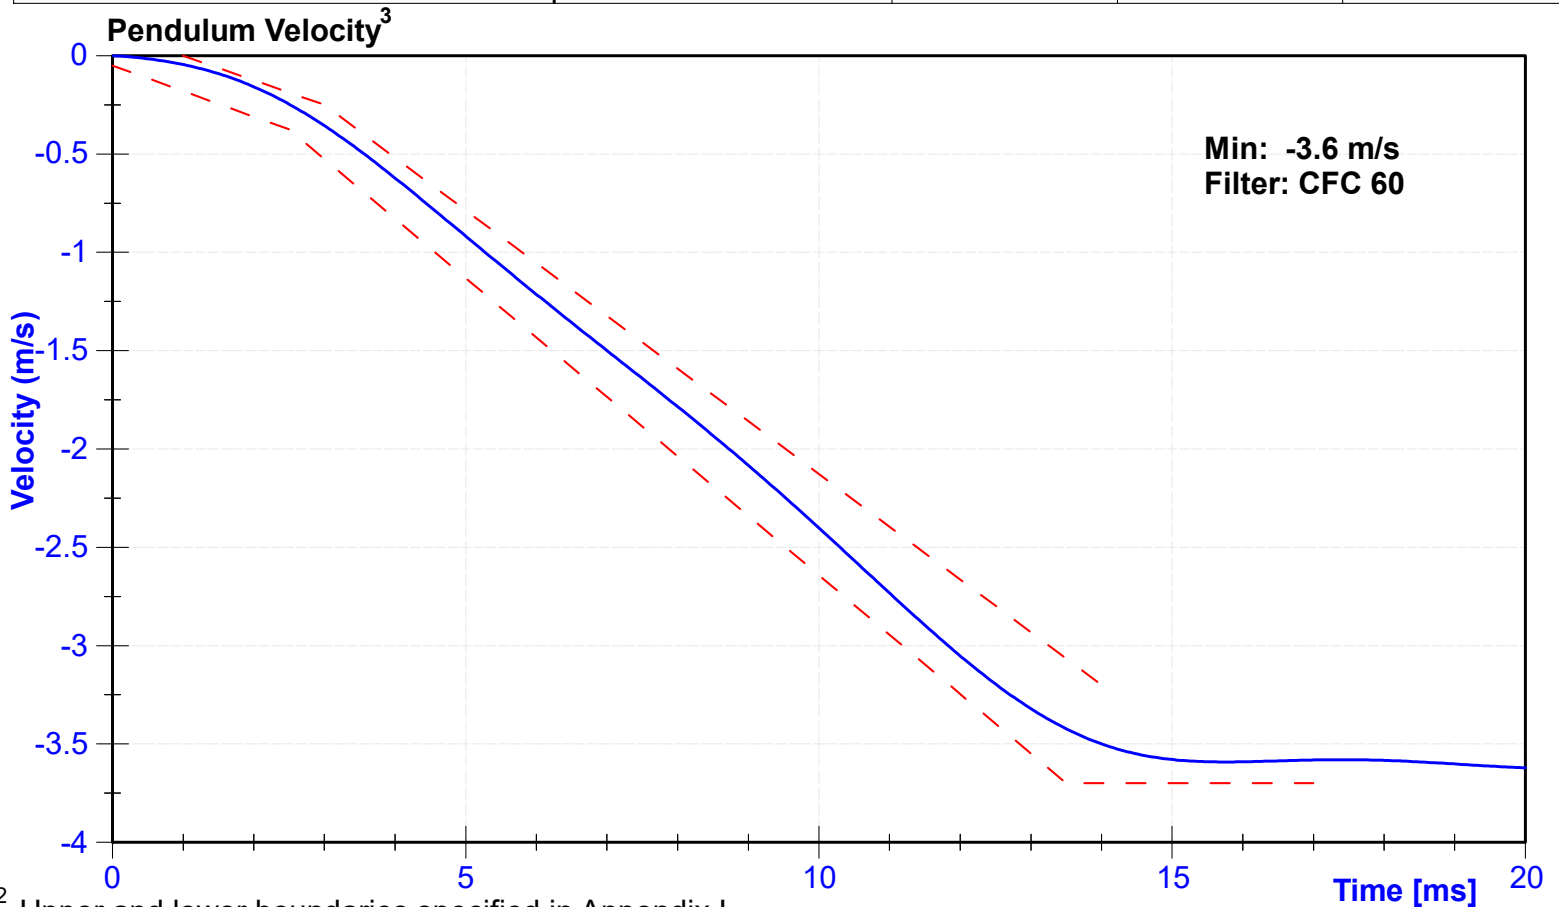


^{1,2} Upper and lower boundaries specified in Appendix I


Neck Rotation

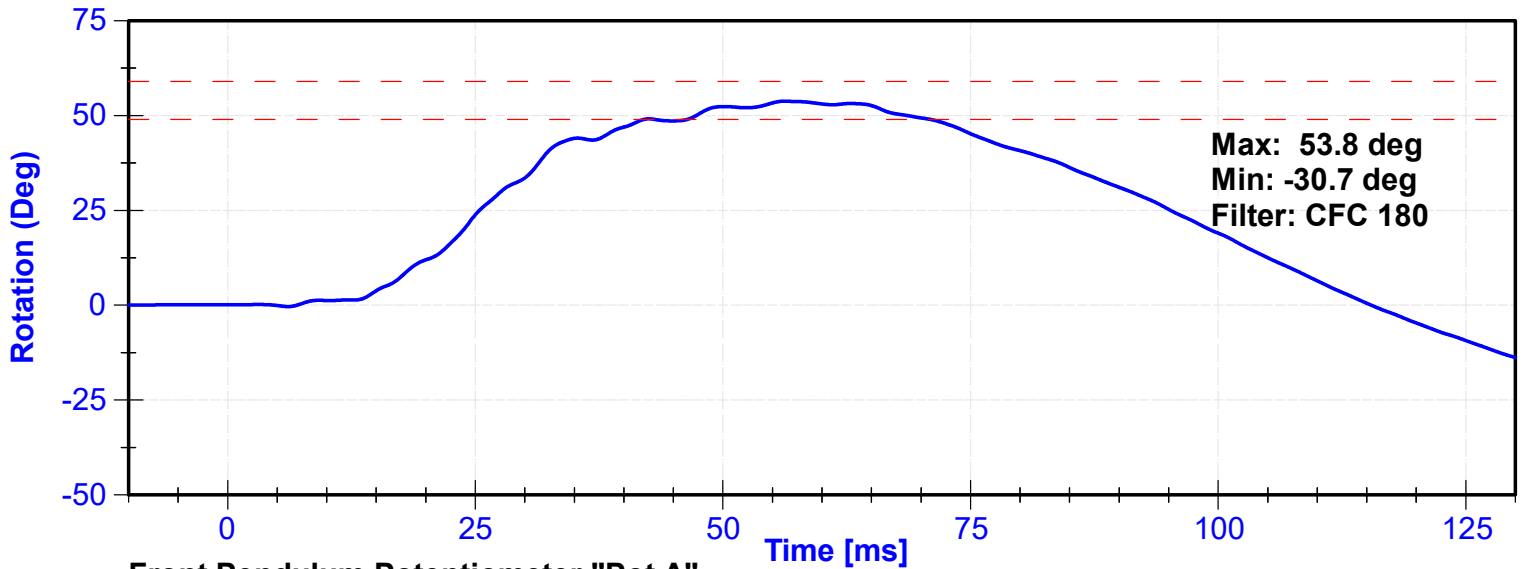

Front Pendulum Potentiometer "Pot A"

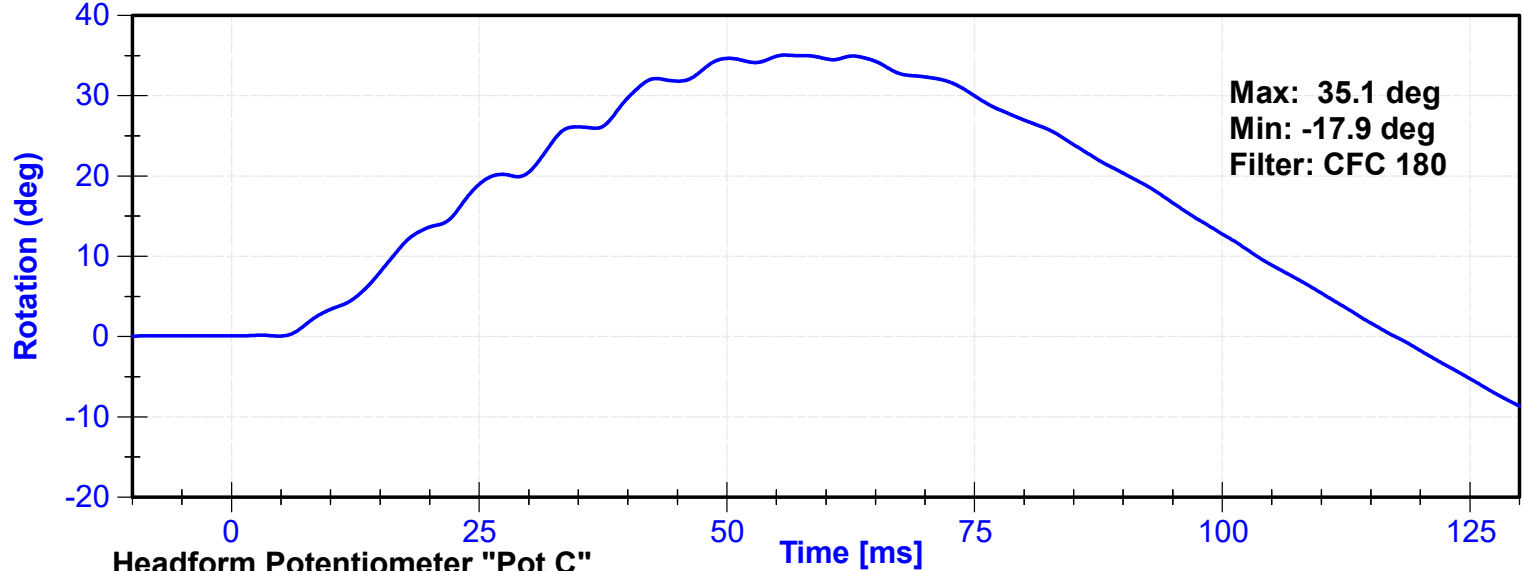

Headform Potentiometer "Pot C"

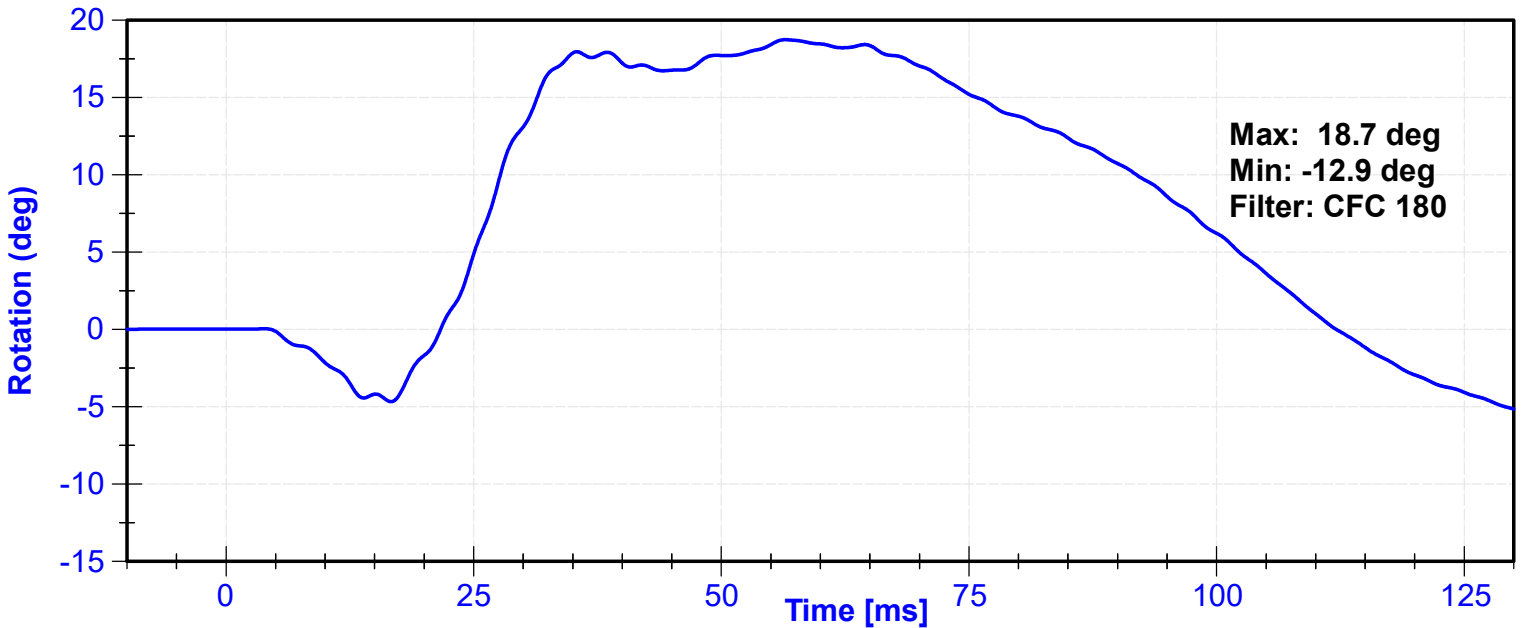

Appendix I

| ² Upper Boundary Corridor | | ¹ Lower Boundary Corridor | |
|--------------------------------------|----------------|--------------------------------------|----------------|
| Time (ms) | Velocity (m/s) | Time (ms) | Velocity (m/s) |
| 1.0 | 0.00 | 0.0 | -0.05 |
| 3.0 | -0.25 | 2.5 | -0.375 |
| 14.0 | -3.20 | 13.5 | -3.7 |
| | | 17.0 | -3.7 |

| | | | |
|-------------------|--------|-----------------------|------------|
| ATD Manufacturer | Denton | Test Technician | T. Roseman |
| ATD Serial Number | D037 | Laboratory Supervisor | C. Mantell |


Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|--------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 20.9 | Pass |
| Humidity | 10 | 70 | % | 21.2 | Pass |
| Velocity | 4.2 | 4.4 | m/s | 4.33 | Pass |
| Probe Acceleration | 7.5 | 10.5 | g's | 7.85 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------------------|--------------|---------------|------------------|----------------------|
| Probe Accelerometer | Endevco | P51736 | 10/25/2022 | 4/23/2023 |

Probe Acceleration

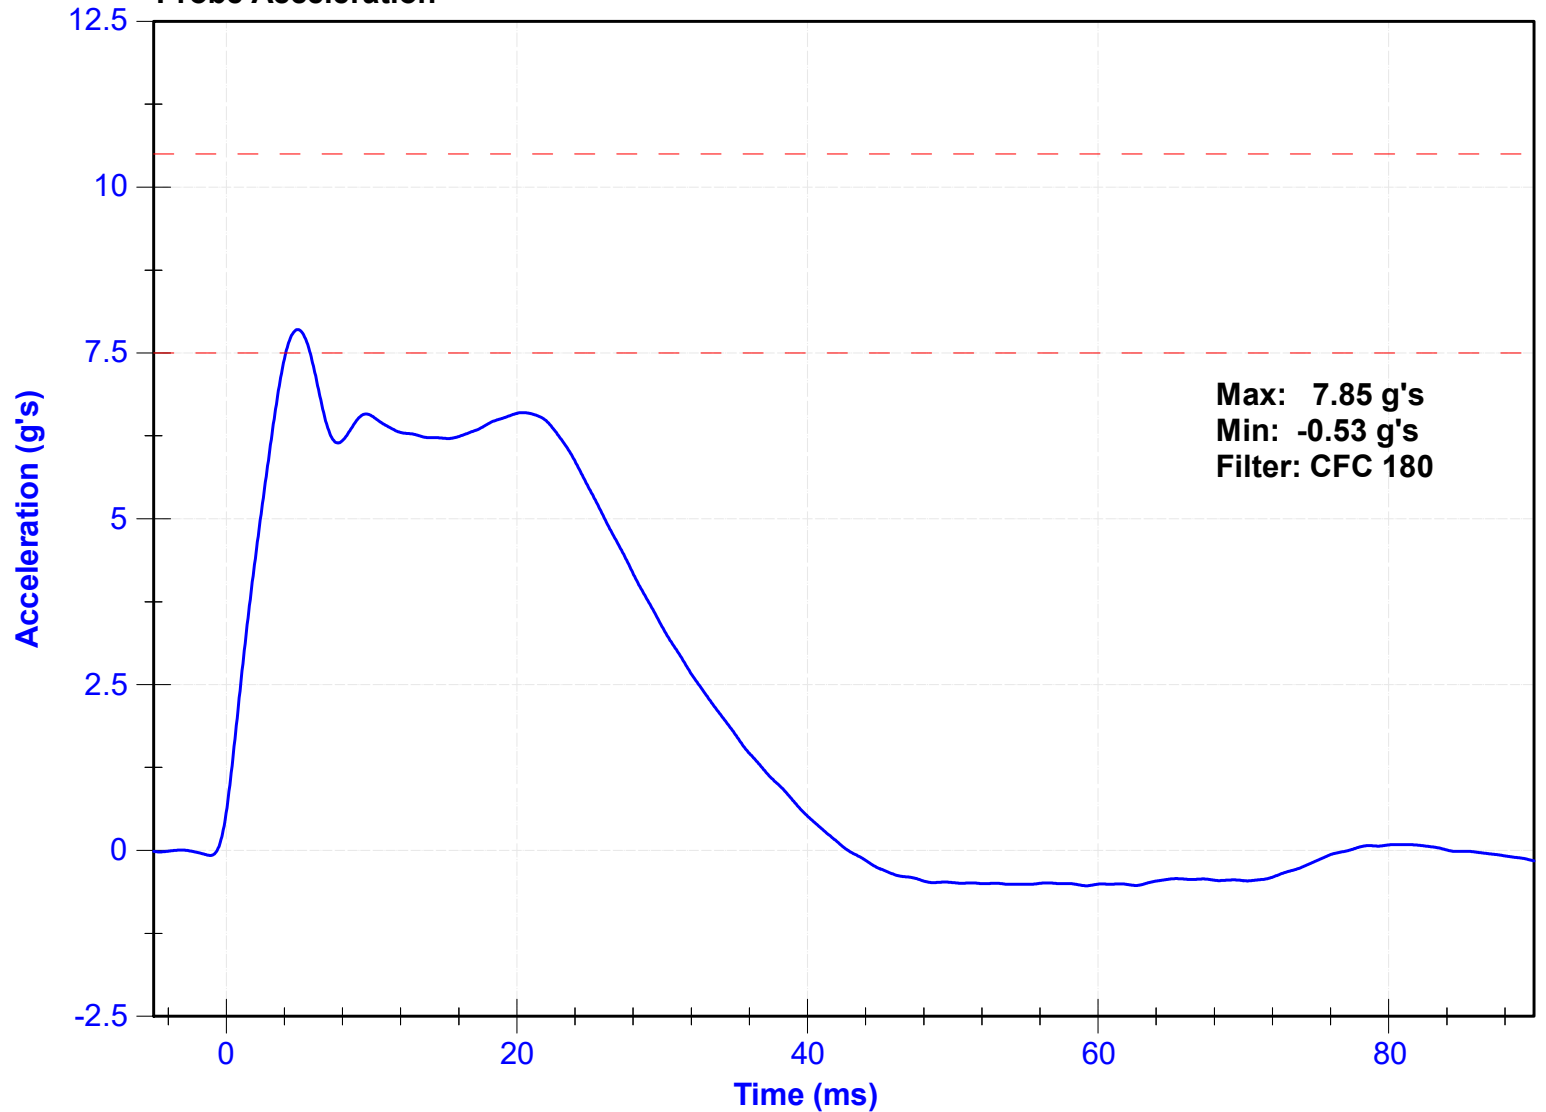


| | | | |
|-------------------|--------|-----------------------|-----------|
| ATD Manufacturer | DENTON | Test Technician | D. Kroll |
| ATD Serial Number | D037 | Laboratory Supervisor | K. Brogan |

Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.0 | Pass |
| Humidity | 10 | 70 | % | 35.0 | Pass |
| Rib Displacement | 36 | 40 | mm | 38.4 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|-------------------|--------------|---------------|------------------|----------------------|
| Rib Potentiometer | Honeywell | DS-0552-01 | 9/7/2022 | 3/8/2023 |

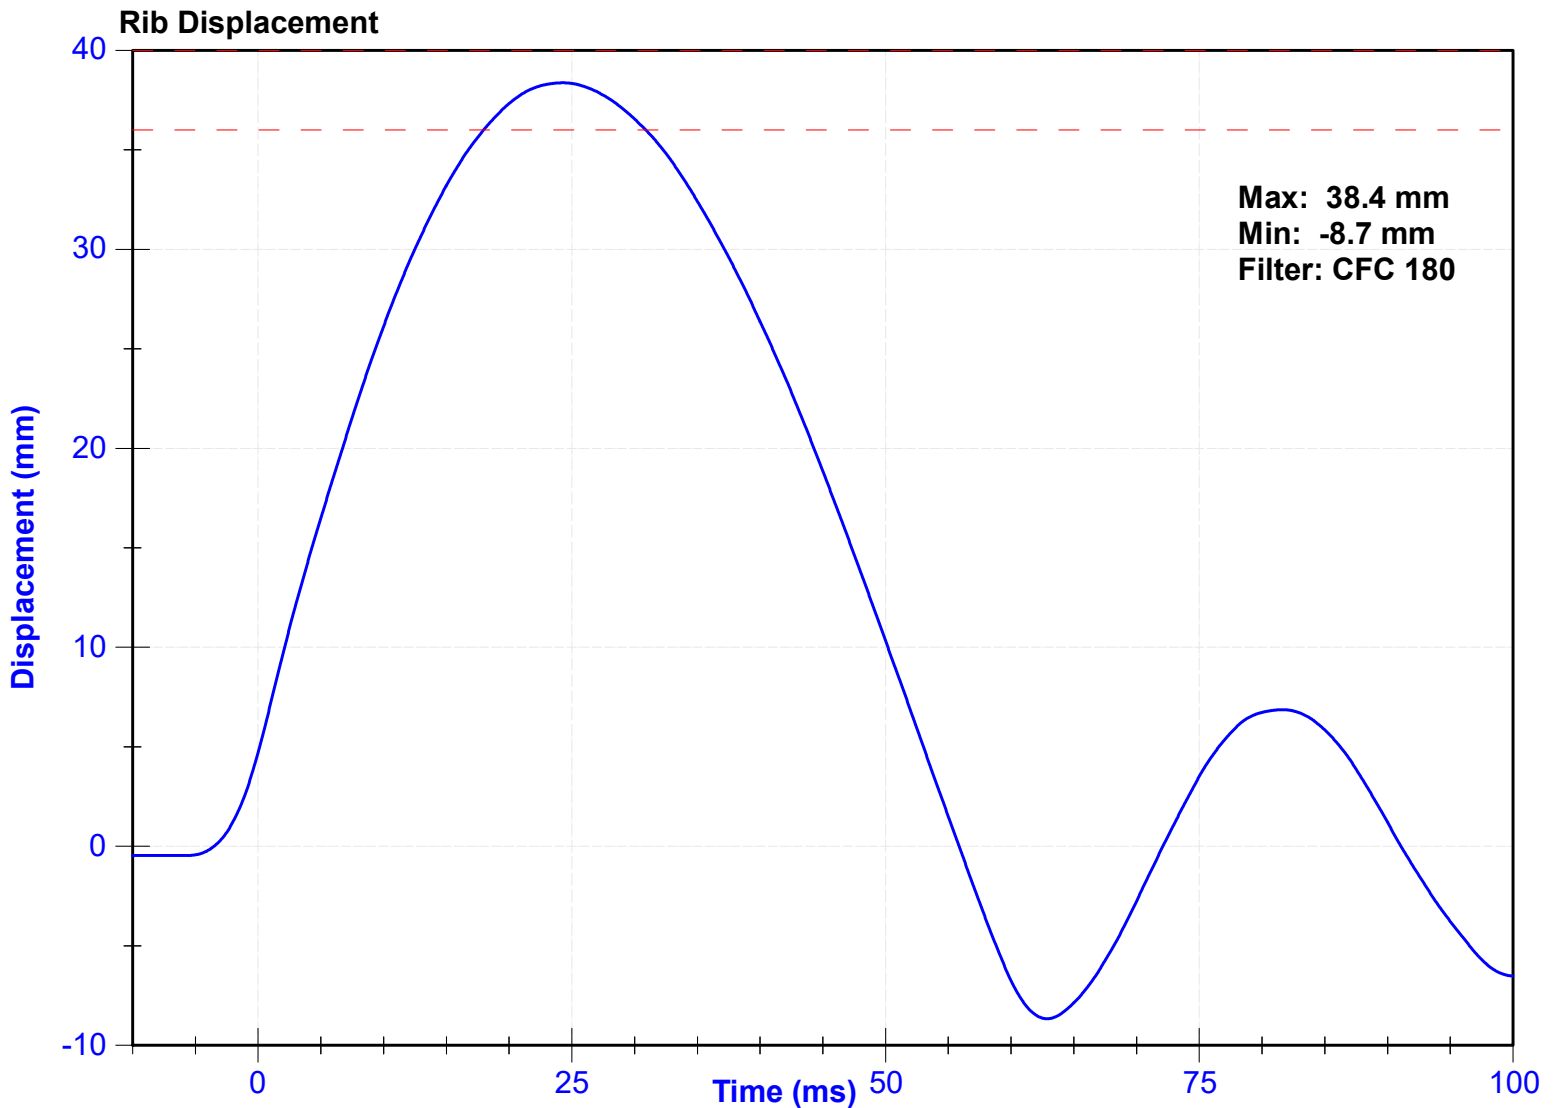


| | | | |
|-------------------|--------|-----------------------|-----------|
| ATD Manufacturer | DENTON | Test Technician | D. Kroll |
| ATD Serial Number | D037 | Laboratory Supervisor | K. Brogan |

Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.0 | Pass |
| Humidity | 10 | 70 | % | 35.0 | Pass |
| Rib Displacement | 46 | 51 | mm | 50.0 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|-------------------|--------------|---------------|------------------|----------------------|
| Rib Potentiometer | Honeywell | DS-0552-01 | 9/7/2022 | 3/8/2023 |

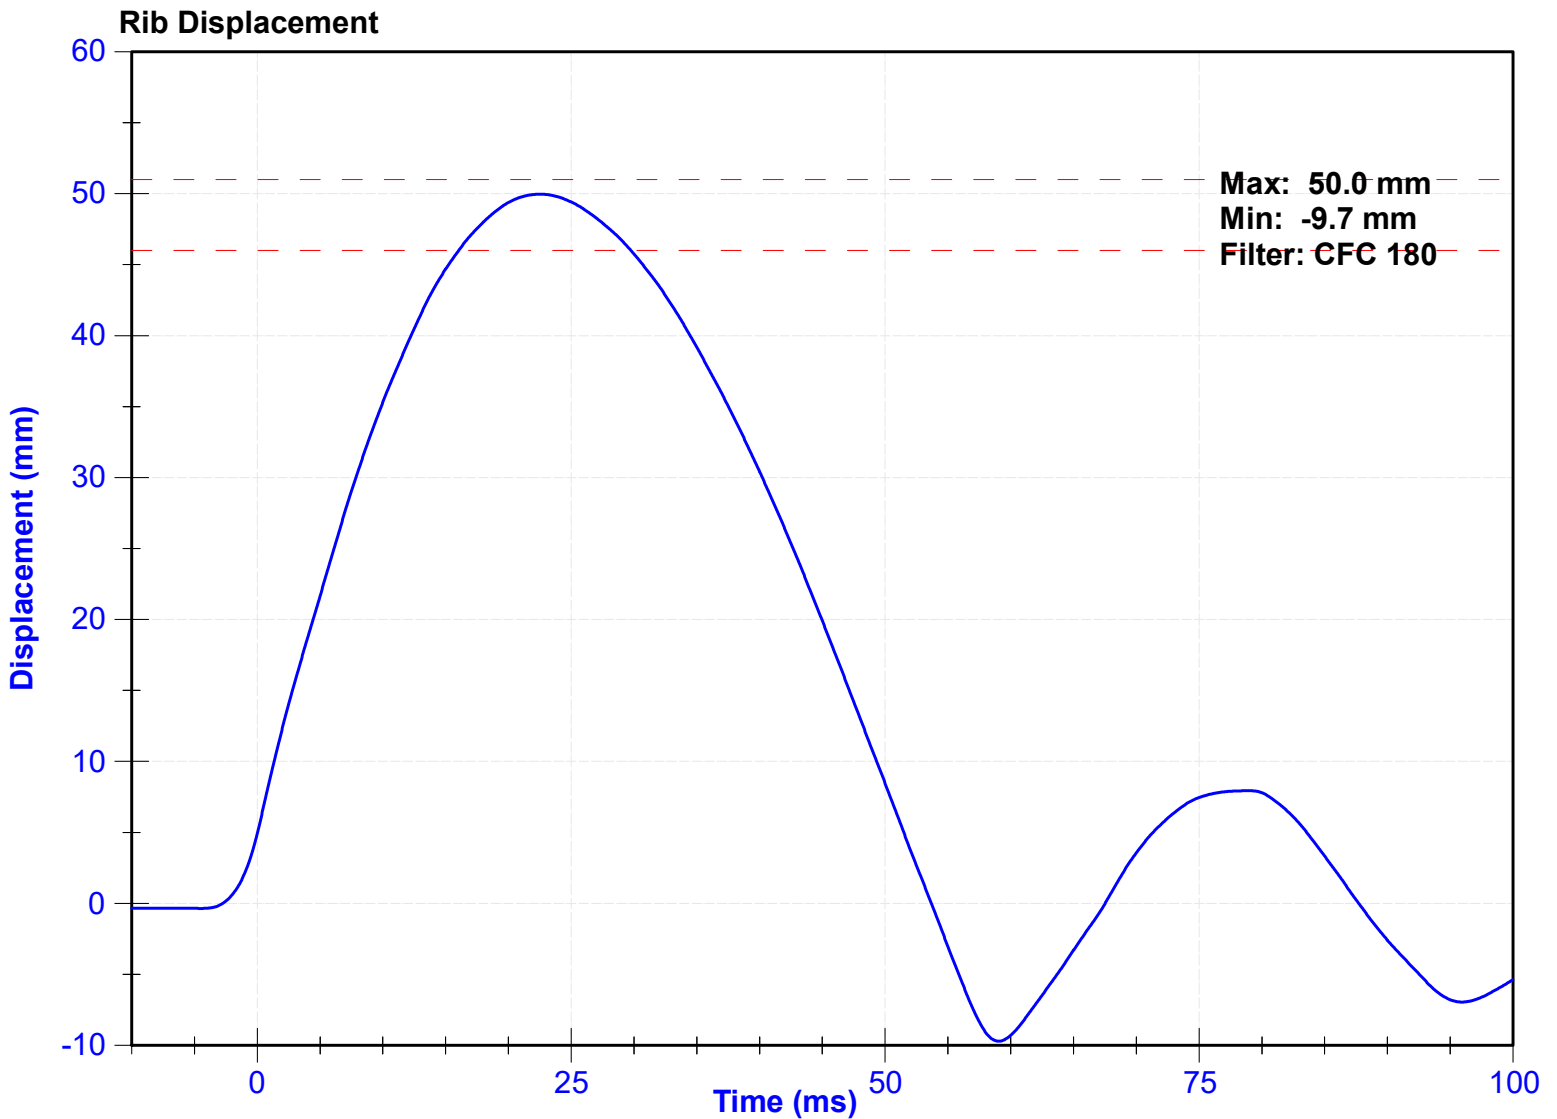


| | | | |
|-------------------|--------|-----------------------|-----------|
| ATD Manufacturer | DENTON | Test Technician | D. Kroll |
| ATD Serial Number | D037 | Laboratory Supervisor | K. Brogan |

Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.0 | Pass |
| Humidity | 10 | 70 | % | 35.0 | Pass |
| Rib Displacement | 36 | 40 | mm | 38.3 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|-------------------|--------------|---------------|------------------|----------------------|
| Rib Potentiometer | Honeywell | DS-807 | 9/7/2022 | 3/8/2023 |

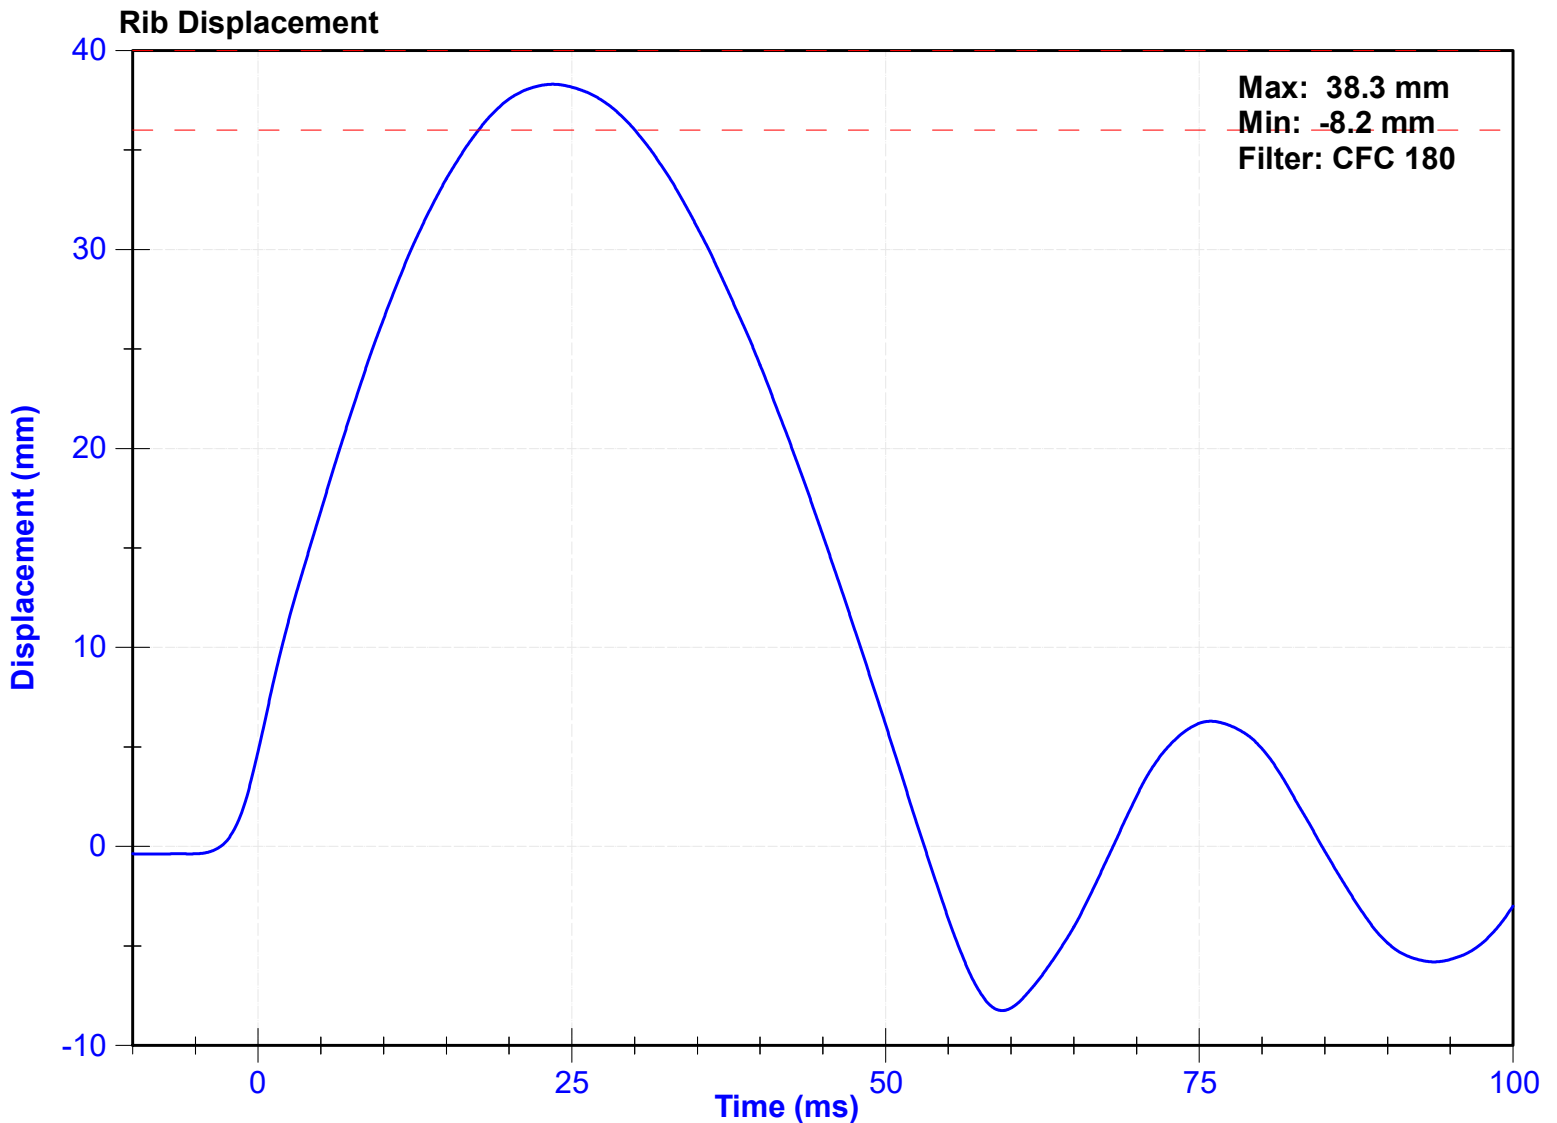


| | | | |
|-------------------|--------|-----------------------|-----------|
| ATD Manufacturer | DENTON | Test Technician | D. Kroll |
| ATD Serial Number | D037 | Laboratory Supervisor | K. Brogan |

Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.0 | Pass |
| Humidity | 10 | 70 | % | 35.0 | Pass |
| Rib Displacement | 46 | 51 | mm | 49.5 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|-------------------|--------------|---------------|------------------|----------------------|
| Rib Potentiometer | Honeywell | DS-807 | 9/7/2022 | 3/8/2023 |

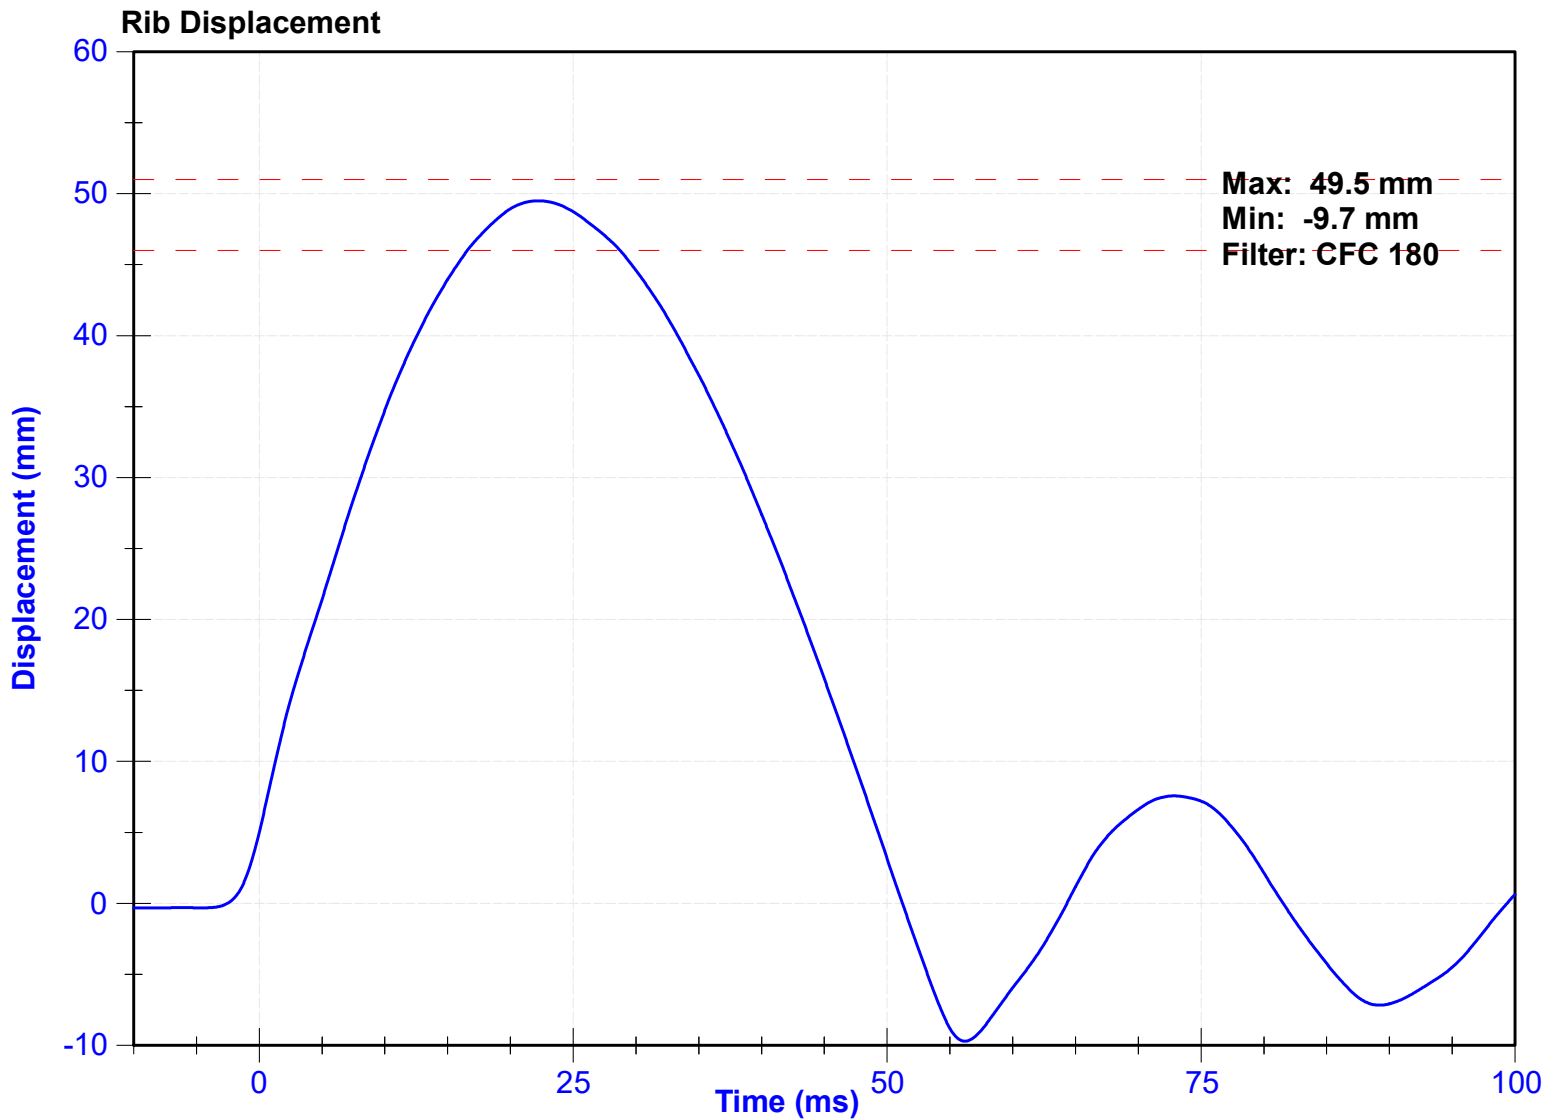


| | | | |
|-------------------|--------|-----------------------|-----------|
| ATD Manufacturer | DENTON | Test Technician | D. Kroll |
| ATD Serial Number | D037 | Laboratory Supervisor | K. Brogan |

Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.0 | Pass |
| Humidity | 10 | 70 | % | 35.0 | Pass |
| Rib Displacement | 36 | 40 | mm | 38.2 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|-------------------|--------------|---------------|------------------|----------------------|
| Rib Potentiometer | Honeywell | DS-0552-03 | 9/7/2022 | 3/8/2023 |

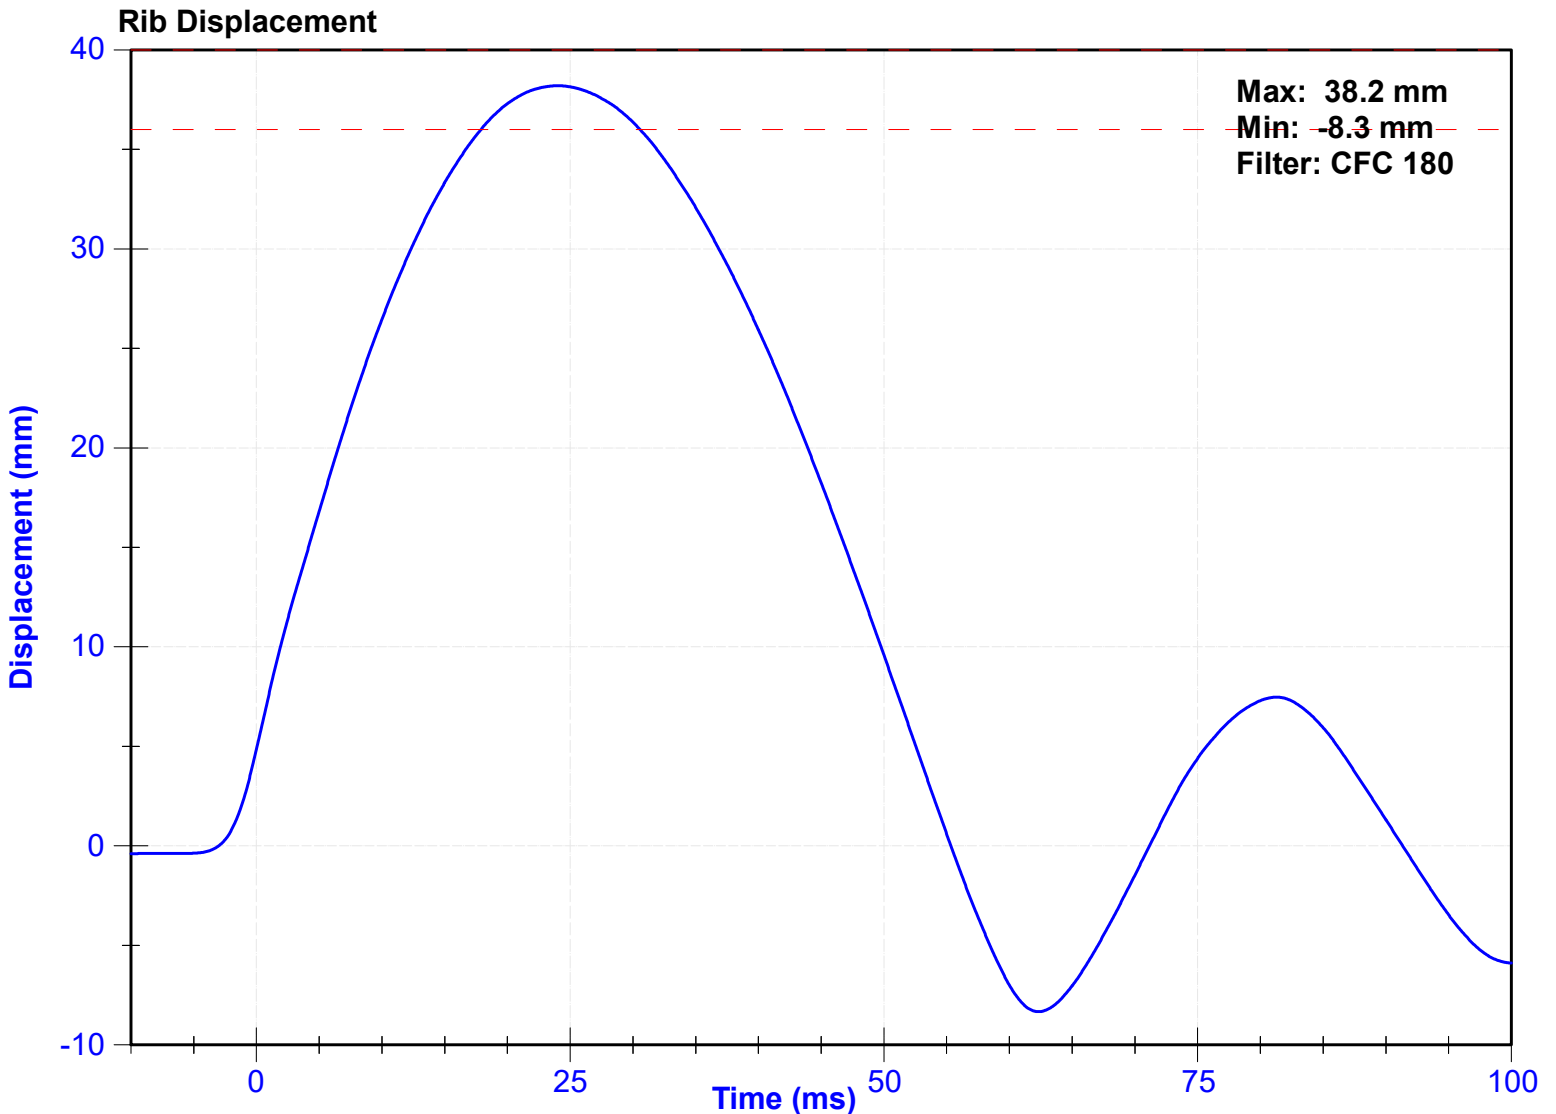


| | | | |
|-------------------|--------|-----------------------|-----------|
| ATD Manufacturer | DENTON | Test Technician | D. Kroll |
| ATD Serial Number | D037 | Laboratory Supervisor | K. Brogan |

Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 22 | Pass |
| Humidity | 10 | 70 | % | 35.0 | Pass |
| Rib Displacement | 46 | 51 | mm | 48.8 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|-------------------|--------------|---------------|------------------|----------------------|
| Rib Potentiometer | Honeywell | DS-0552-03 | 9/7/2022 | 3/8/2023 |

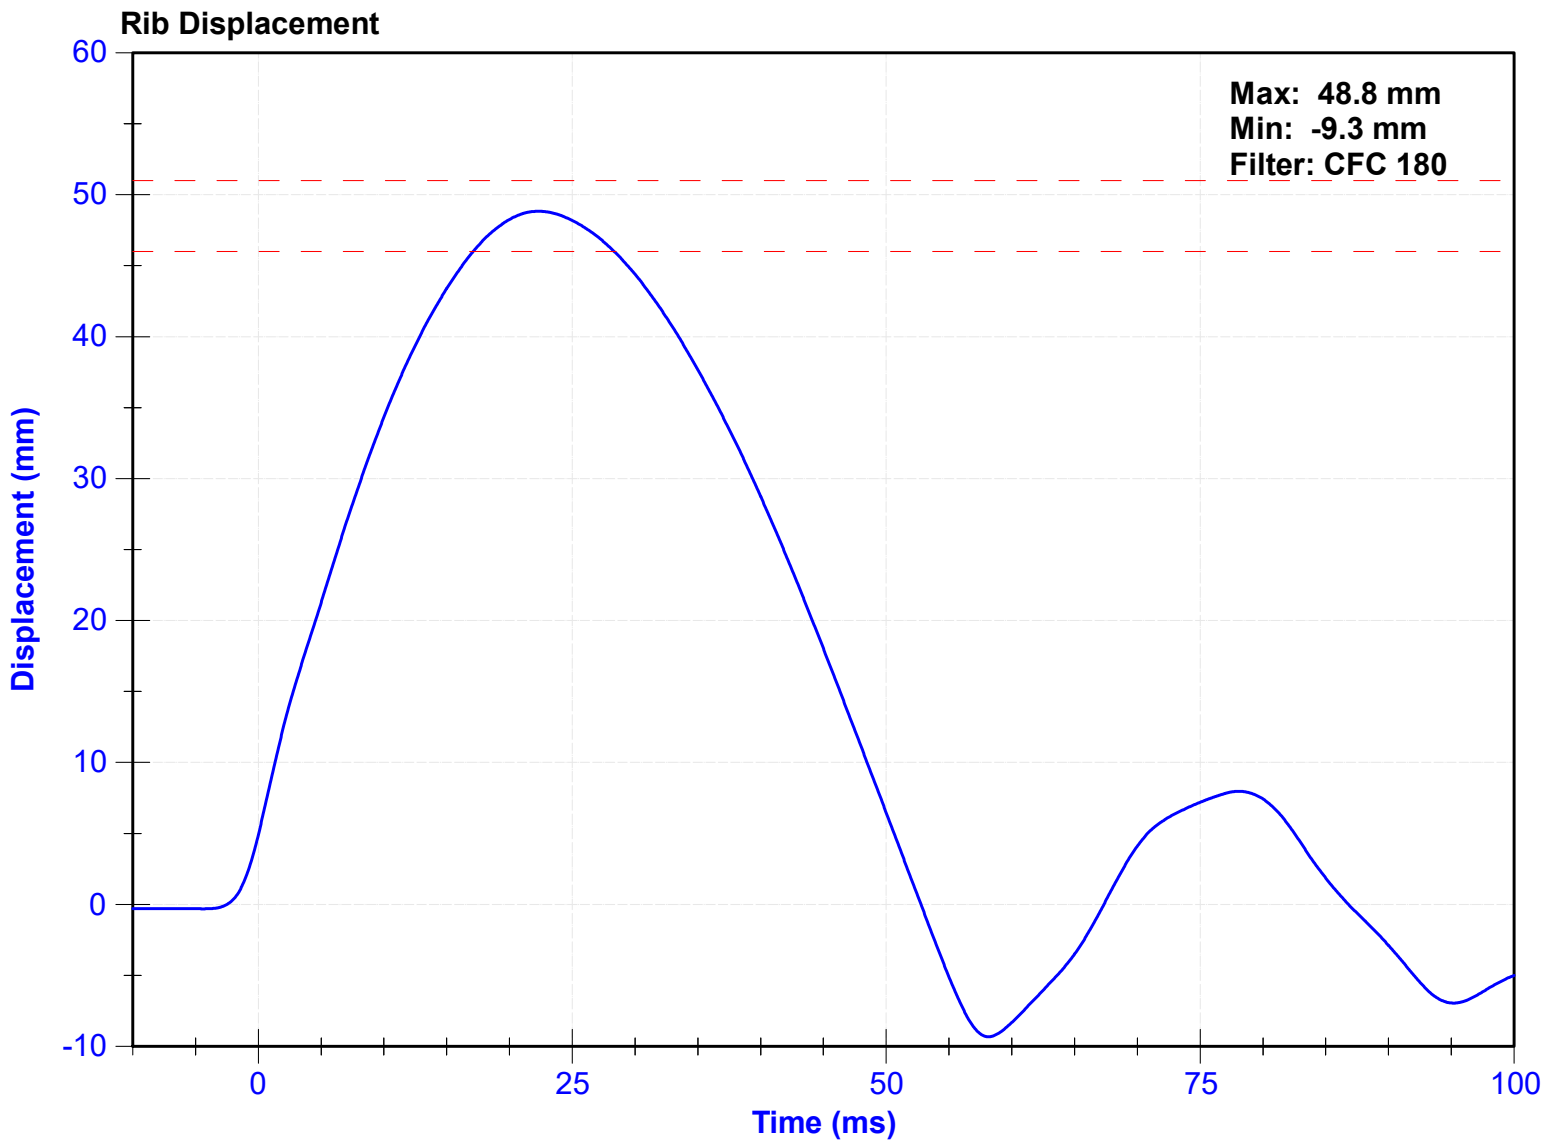

| | | | |
|-------------------|--------|-----------------------|------------|
| ATD Manufacturer | Denton | Test Technician | T. Roseman |
| ATD Serial Number | D037 | Laboratory Supervisor | C. Mantell |


Results





| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|-----------------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 20.9 | Pass |
| Humidity | 10 | 70 | % | 21.2 | Pass |
| Velocity | 5.4 | 5.6 | m/s | 5.52 | Pass |
| Resistive Force after 6ms | 5100 | 6200 | N | 5736.3 | Pass |
| Upper Thorax Rib Deflection | 34 | 41 | mm | 39.4 | Pass |
| Mid Thorax Rib Deflection | 37 | 45 | mm | 42.2 | Pass |
| Lower Thorax Rib Deflection | 37 | 44 | mm | 41.7 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------------------------------|--------------|---------------|------------------|----------------------|
| Probe Accelerometer | Endevco | P51736 | 10/25/2022 | 4/23/2023 |
| Upper Thorax Rib Potentiometer | Honeywell | DS-0552-01 | 9/7/2022 | 3/8/2023 |
| Middle Thorax Rib Potentiometer | Honeywell | DS-807 | 9/7/2022 | 3/8/2023 |
| Lower Thorax Rib Potentiometer | Honeywell | DS-0552-03 | 9/7/2022 | 3/8/2023 |

Probe Acceleration

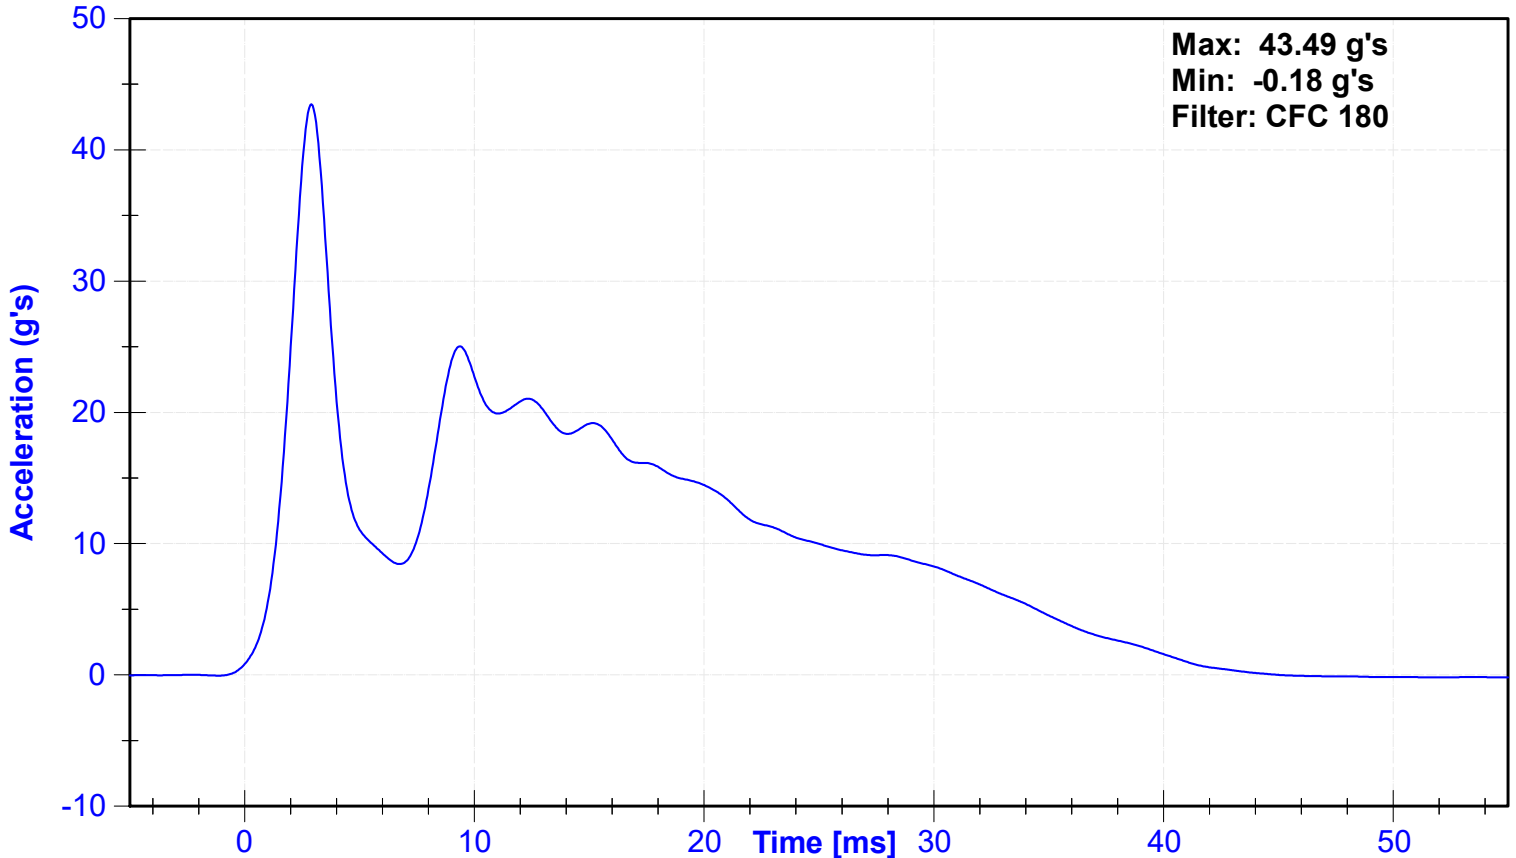

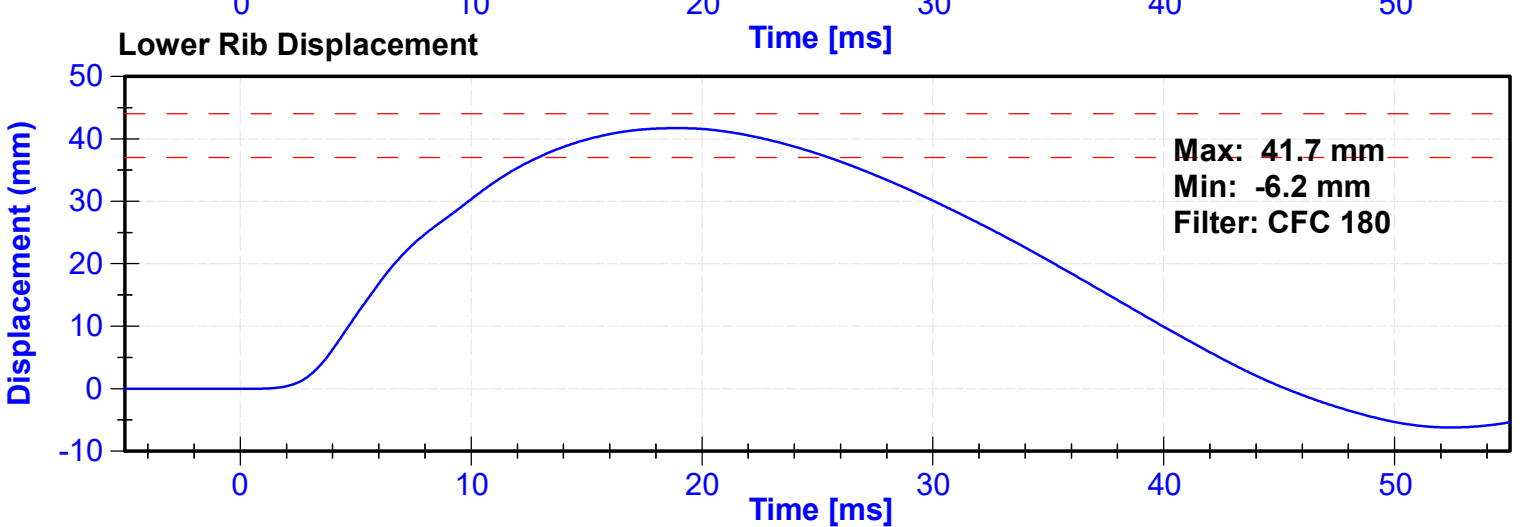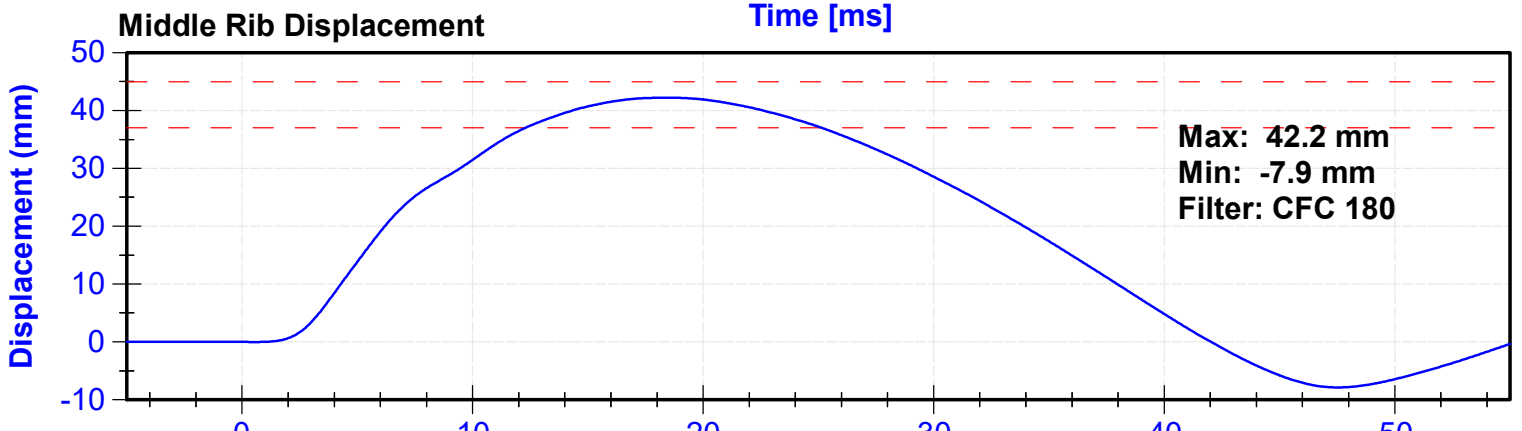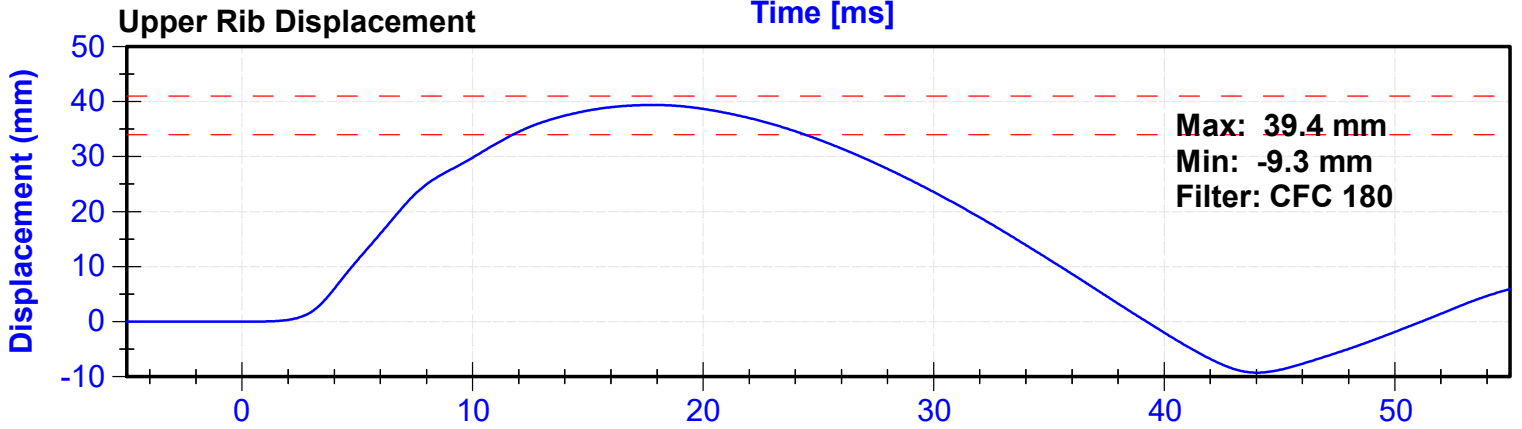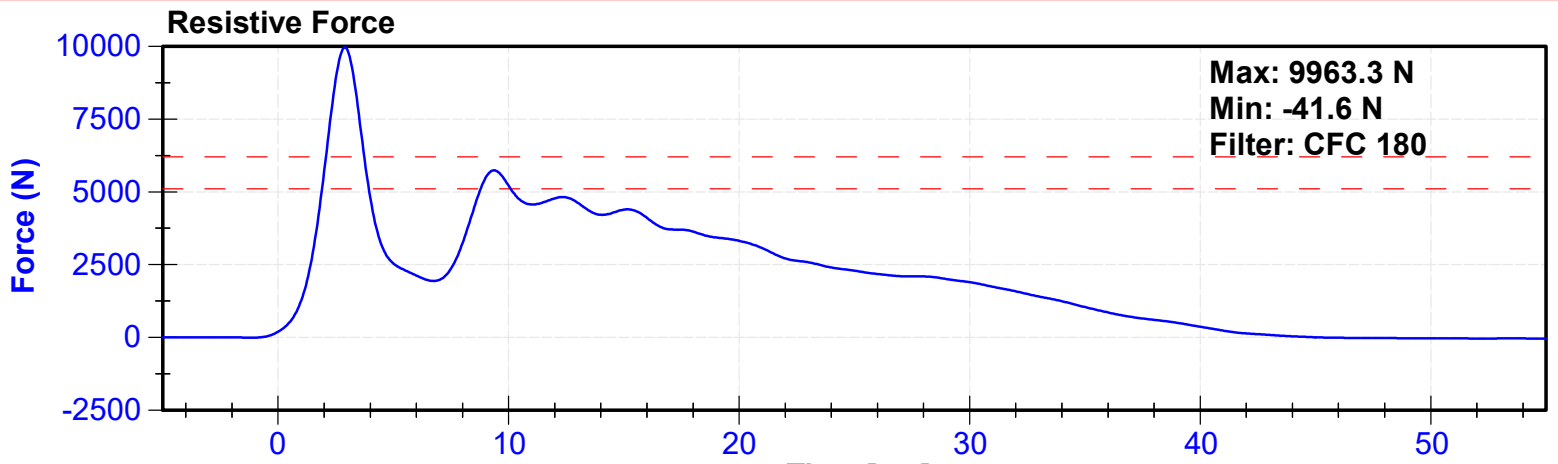

| | | | |
|-------------------|--------|-----------------------|------------|
| ATD Manufacturer | Denton | Test Technician | T. Roseman |
| ATD Serial Number | D037 | Laboratory Supervisor | C. Mantell |


Results





| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|------------------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 20.9 | Pass |
| Humidity | 10 | 70 | % | 21.2 | Pass |
| Velocity | 3.9 | 4.1 | m/s | 4.06 | Pass |
| Combined Abdomen Force | 2200 | 2700 | N | 2290.1 | Pass |
| Time at Peak Abdomen Force | 10.0 | 12.3 | ms | 10.30 | Pass |
| Resistive Probe Force | 4000 | 4800 | N | 4628.1 | Pass |
| Time at Peak Resistive Force | 10.6 | 13.0 | ms | 10.60 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|--------------------------|--------------|---------------|------------------|----------------------|
| Pendulum Accelerometer | Endevco | P51736 | 10/25/2022 | 4/23/2023 |
| Front Abdomen Load Cell | Denton | 1440 | 8/12/2022 | 8/12/2023 |
| Middle Abdomen Load Cell | Denton | 1525 | 8/12/2022 | 8/12/2023 |
| Rear Abdomen Load Cell | Denton | 1528 | 8/12/2022 | 8/12/2023 |

Probe Force

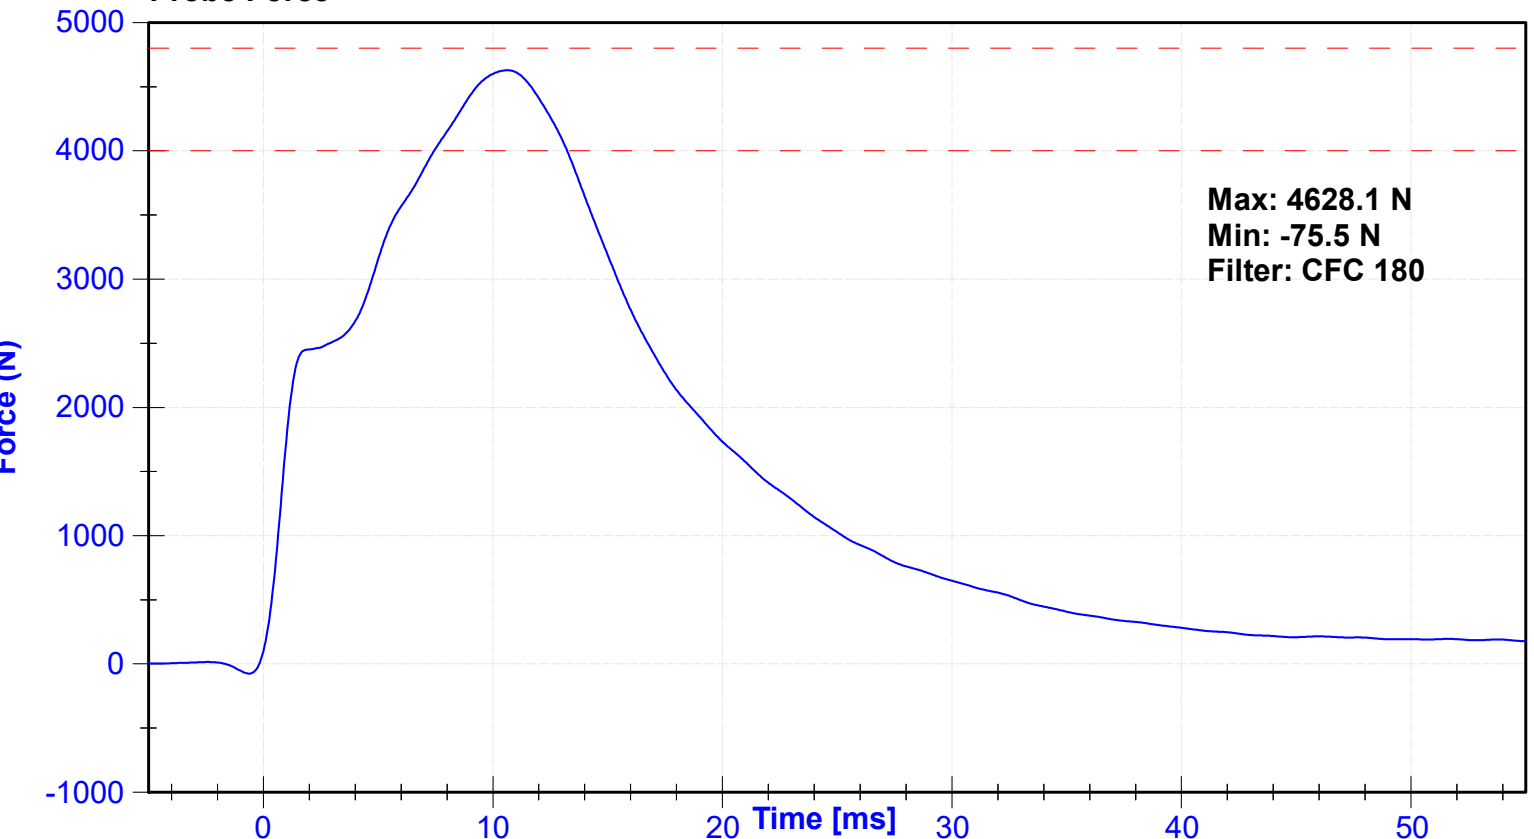

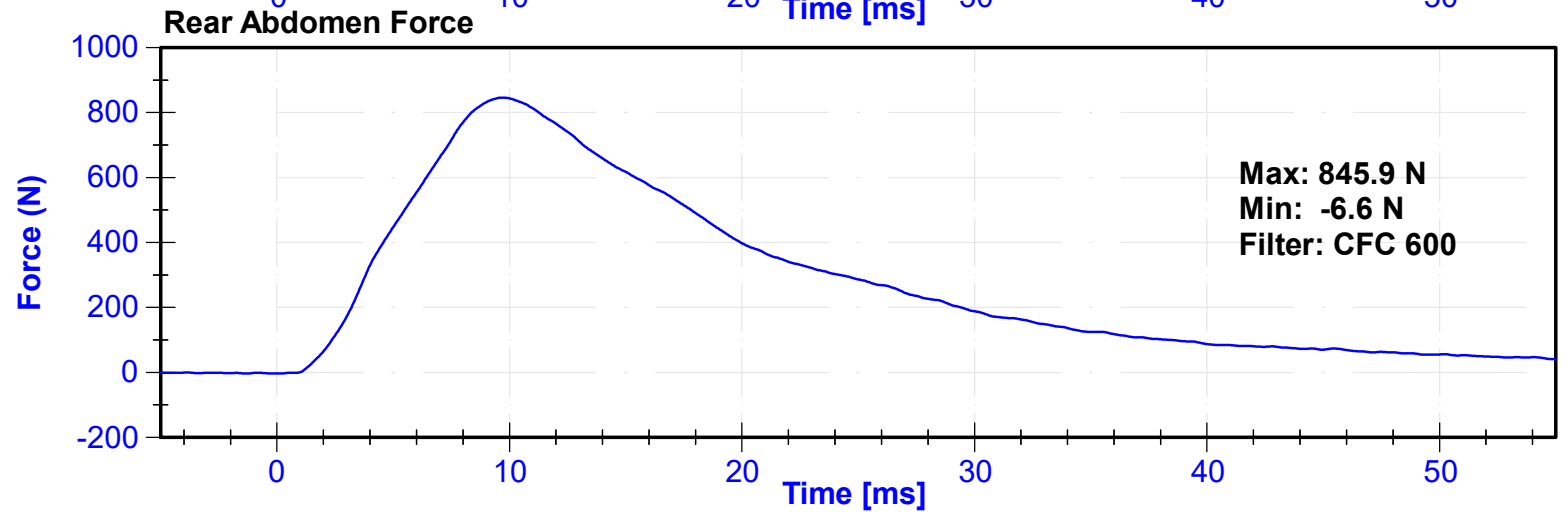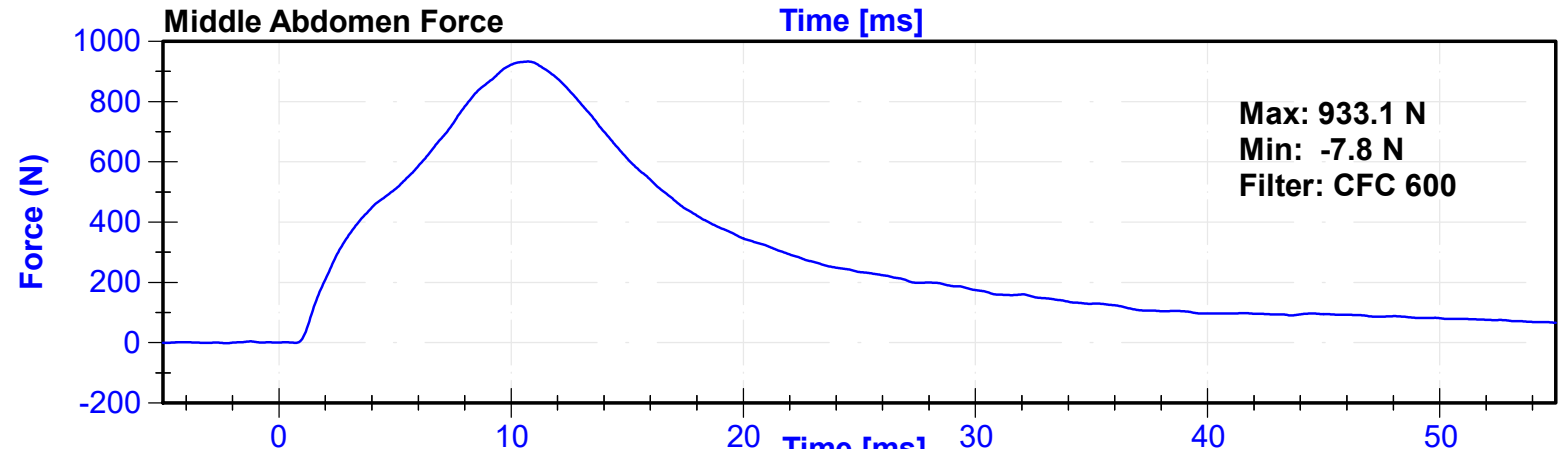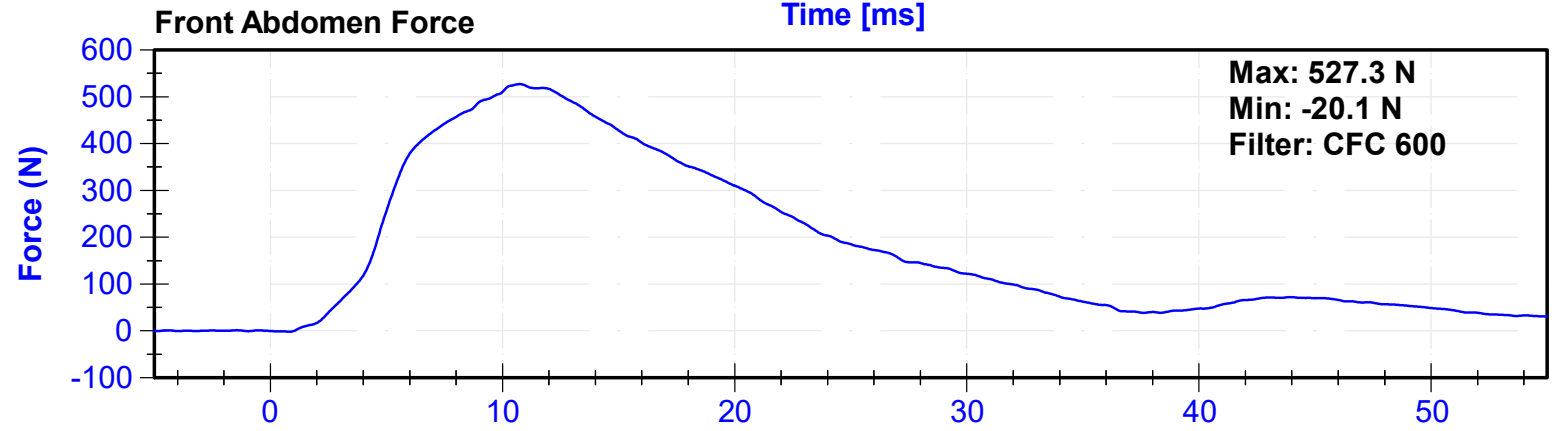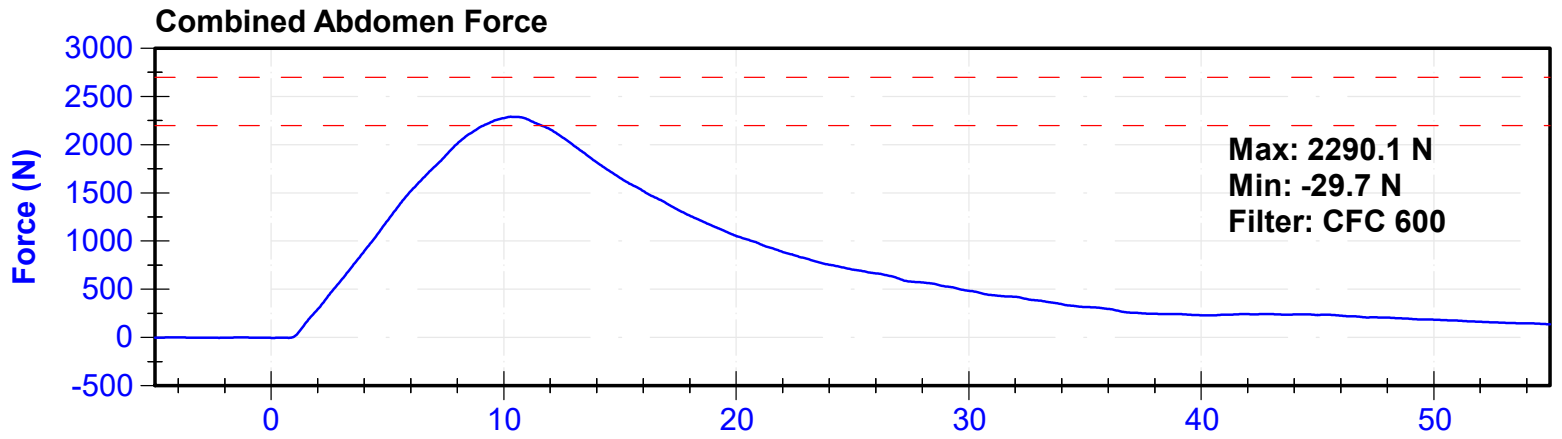


| | | | |
|-------------------|--------|-----------------------|------------|
| ATD Manufacturer | Denton | Test Technician | C. Mantell |
| ATD Serial Number | D037 | Laboratory Supervisor | K. Brogan |

Results



| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|------------------------------------|-----------------------------|-----------------------------|------|-----------------------|-----------|
| Temperature | 20.6 | 22.2 | °C | 22.0 | Pass |
| Humidity | 10 | 70 | % | 30 | Pass |
| Velocity | 5.95 | 6.15 | m/s | 6.012 | Pass |
| Lateral Spine Rotation | 45 | 55 | deg | 53.4 | Pass |
| Time at Maximum Rotation | 39 | 53 | ms | 47.5 | Pass |
| Time of Decay to Zero Degrees | 37 | 57 | ms | 39.3 | Pass |
| Pendulum Velocity Overall Corridor | Lower Boundary ¹ | Upper Boundary ² | m/s | See Plot ³ | Pass |


Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|----------------------------|--------------|---------------|------------------|----------------------|
| Pendulum Accelerometer | Endevco | C16503 | 10/26/2022 | 10/26/2023 |
| Pendulum "A" Potentiometer | Sfernice | 094 | 10/5/2022 | 10/5/2023 |
| Condyle "B" Potentiometer | Sfernice | 095 | 10/5/2022 | 10/5/2023 |

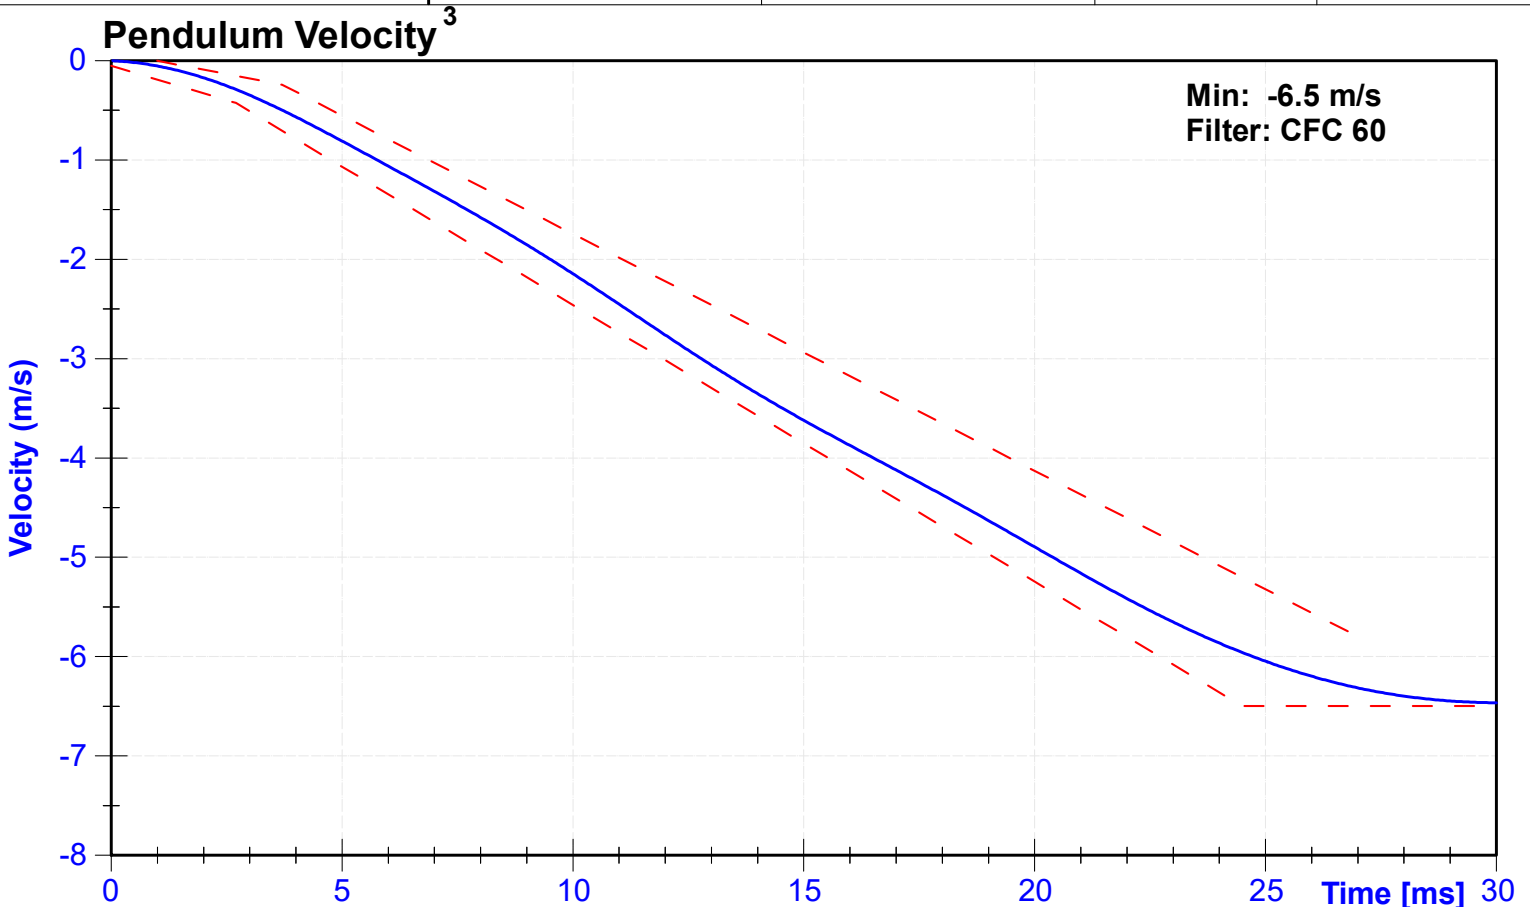

^{1,2} Upper and lower boundaries specified in Appendix I

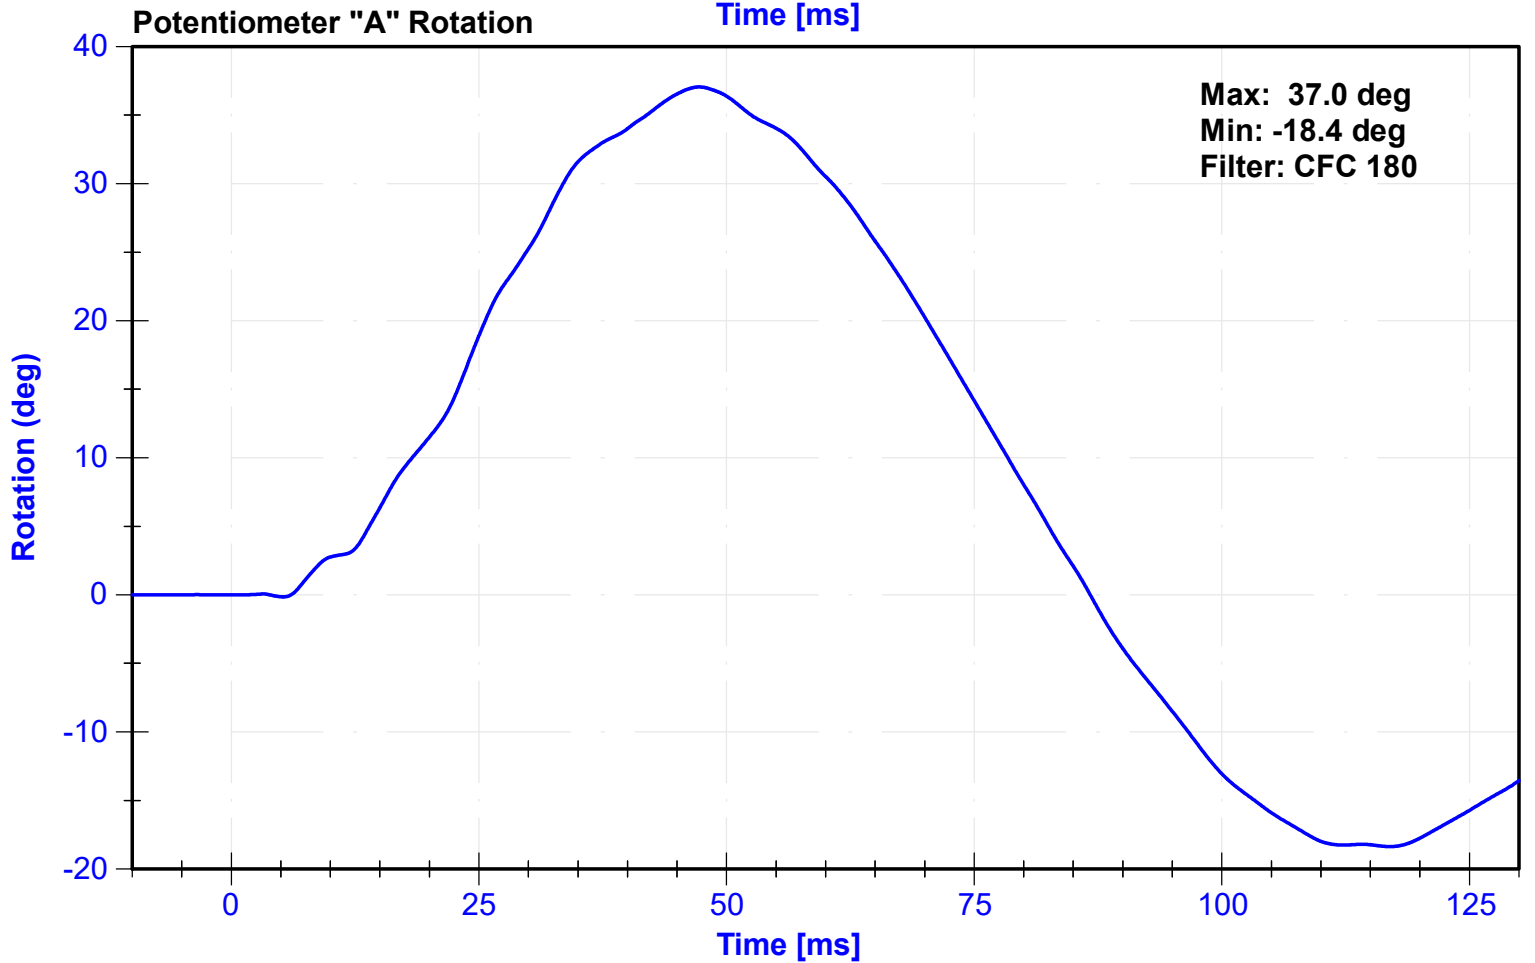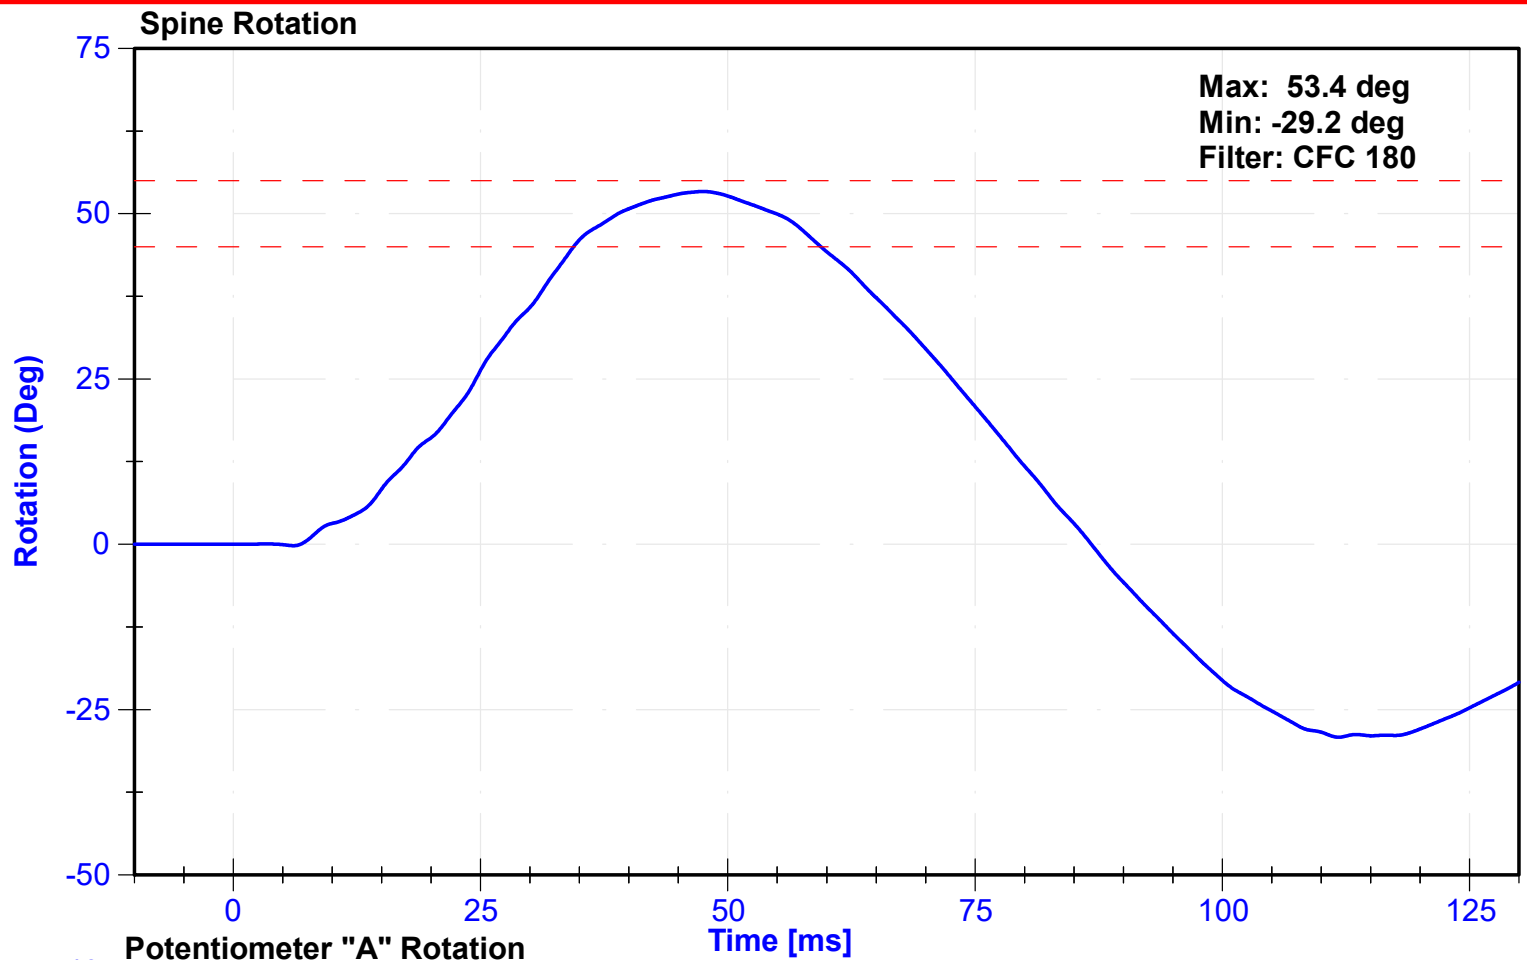

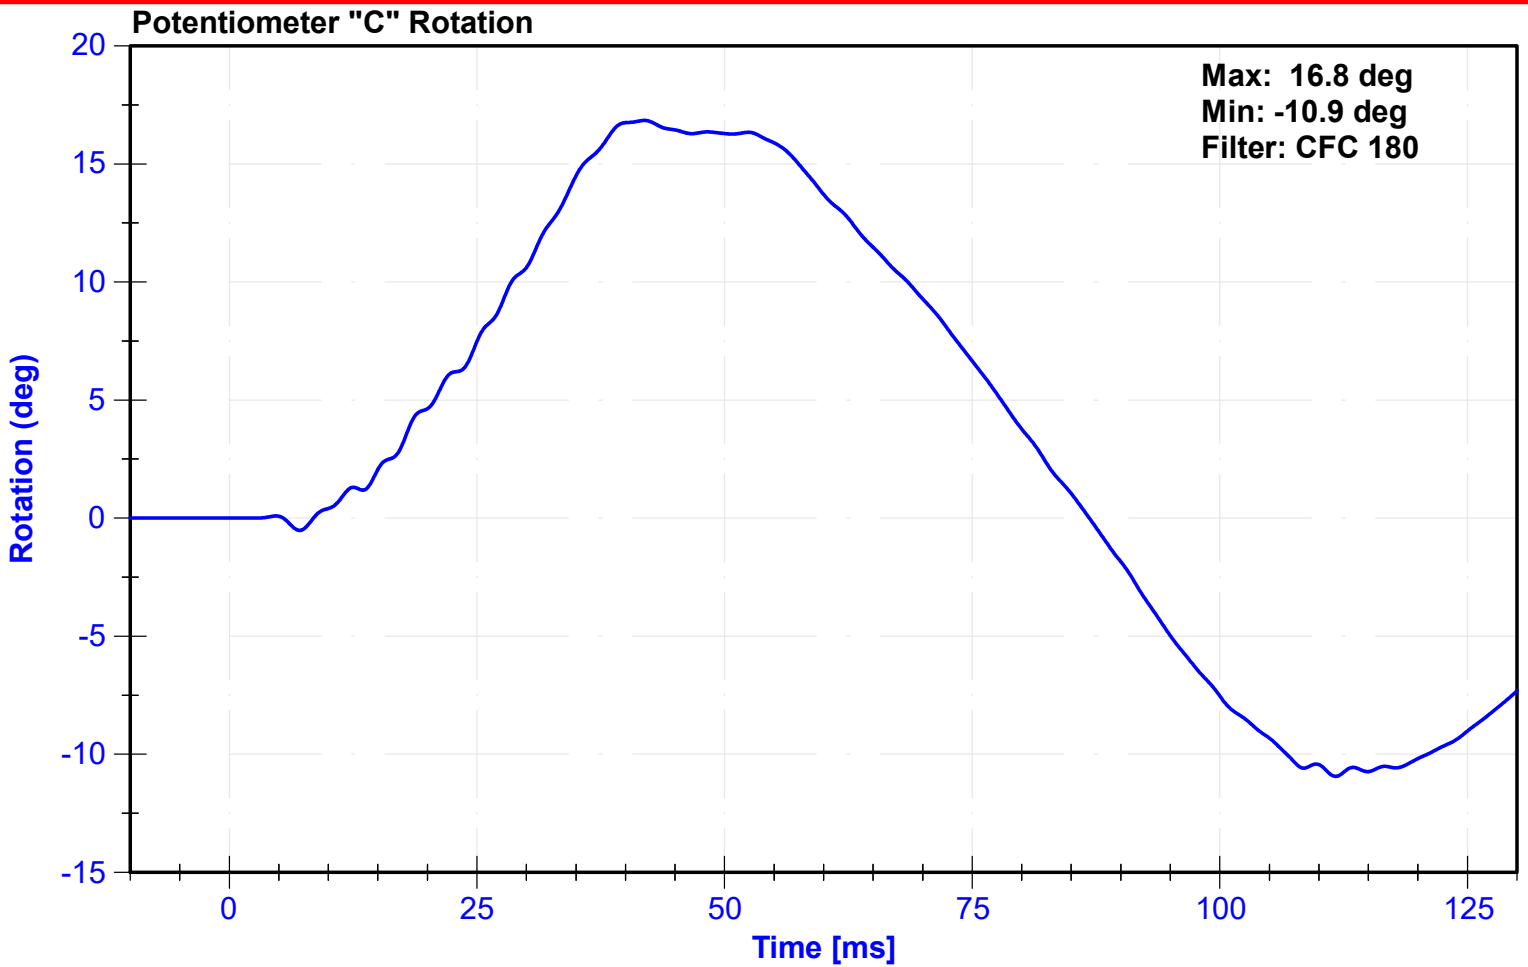

Appendix I

| ² Upper Boundary Corridor | | ¹ Lower Boundary Corridor | |
|--------------------------------------|----------------|--------------------------------------|----------------|
| Time (ms) | Velocity (m/s) | Time (ms) | Velocity (m/s) |
| 1.0 | 0.00 | 0.0 | -0.05 |
| 3.7 | -0.24 | 2.7 | -0.425 |
| 27.0 | -5.80 | 24.5 | -6.5 |
| | | 30.0 | -6.5 |


| | | | |
|-------------------|--------|-----------------------|------------|
| ATD Manufacturer | Denton | Test Technician | T. Roseman |
| ATD Serial Number | D037 | Laboratory Supervisor | C. Mantell |

Results


| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|------------------------------|-----------------------|-----------------------|------|---------|-----------|
| Temperature | 20.6 | 22.2 | °C | 20.9 | Pass |
| Humidity | 10 | 70 | % | 21.2 | Pass |
| Velocity | 4.2 | 4.4 | m/s | 4.35 | Pass |
| Resistive Force | 4700 | 5400 | N | 4763.0 | Pass |
| Time at Peak Resistive Force | 11.8 | 16.1 | ms | 14.85 | Pass |
| Pubic Force | -1590 | -1230 | N | -1377.9 | Pass |
| Time at Peak Pubic Force | 12.2 | 17.0 | ms | 14.55 | Pass |

Transducer Calibrations


| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|------------------------|--------------|----------------|------------------|----------------------|
| Pendulum Accelerometer | Endevco | P51736 | 10/25/2022 | 4/23/2023 |
| Pubic Load Cell | Denton | 3096JFL-456-FY | 8/12/2022 | 8/12/2023 |

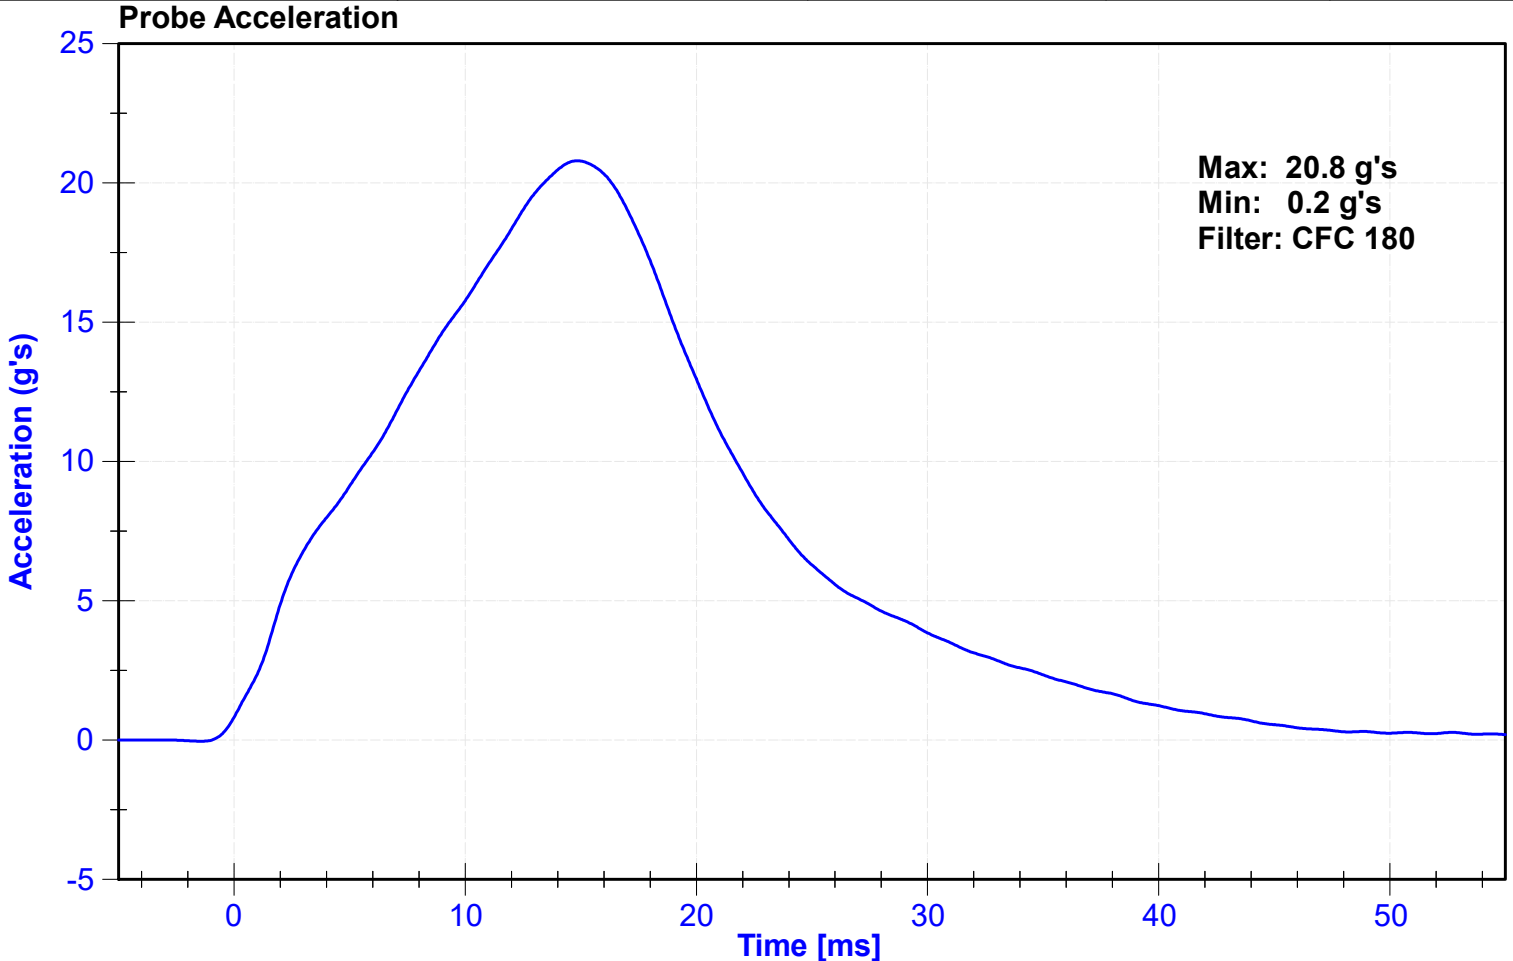

Resistive Force

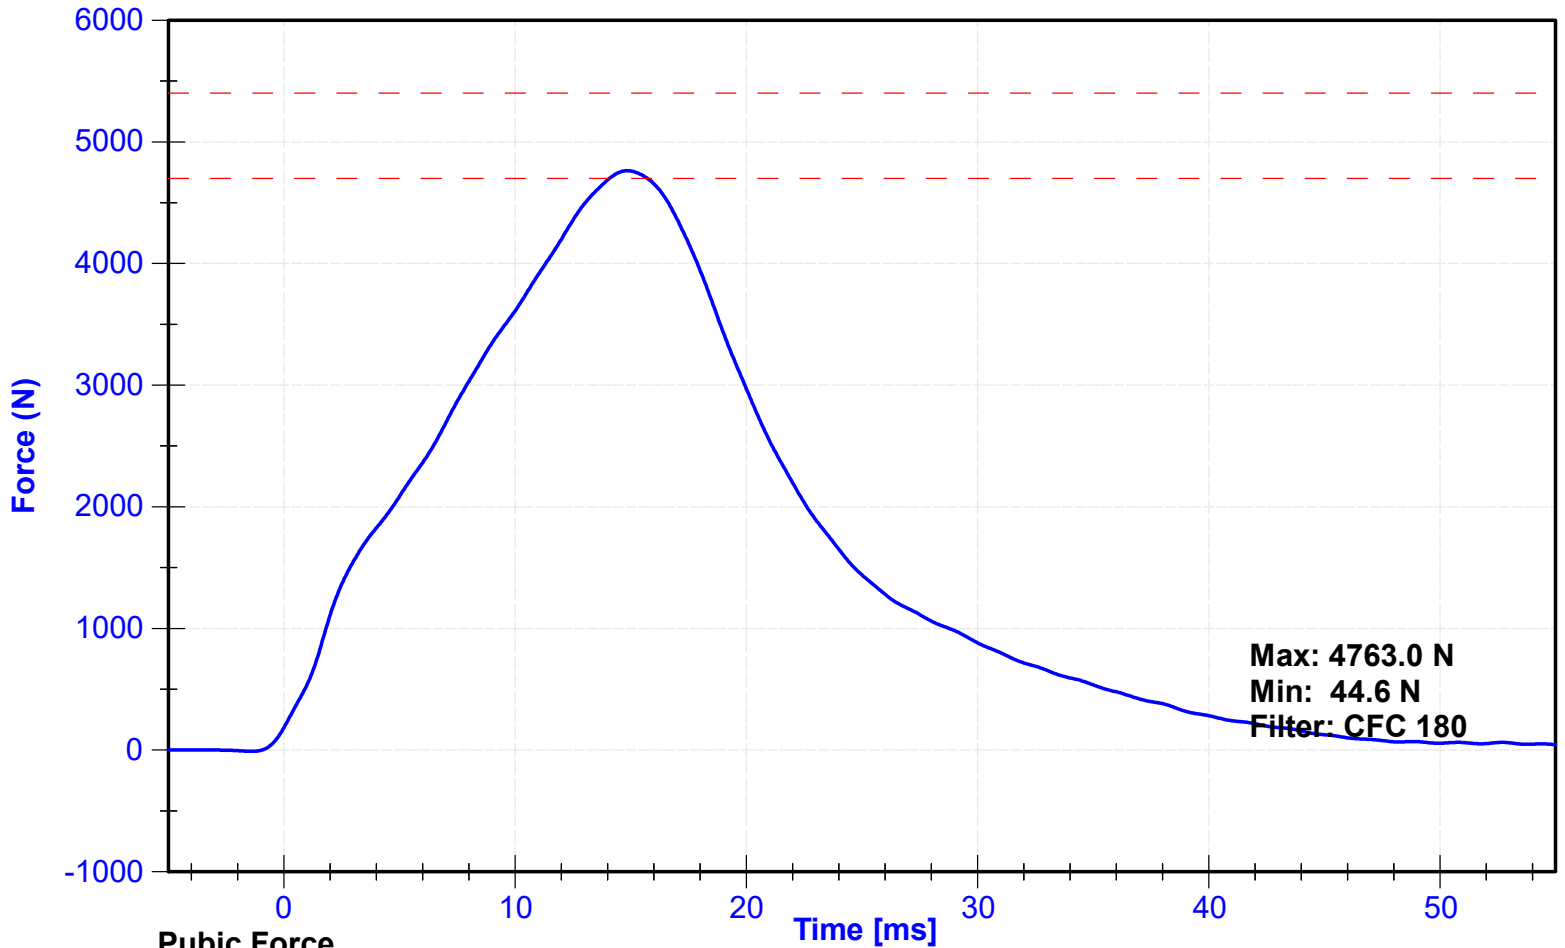

Pubic Force

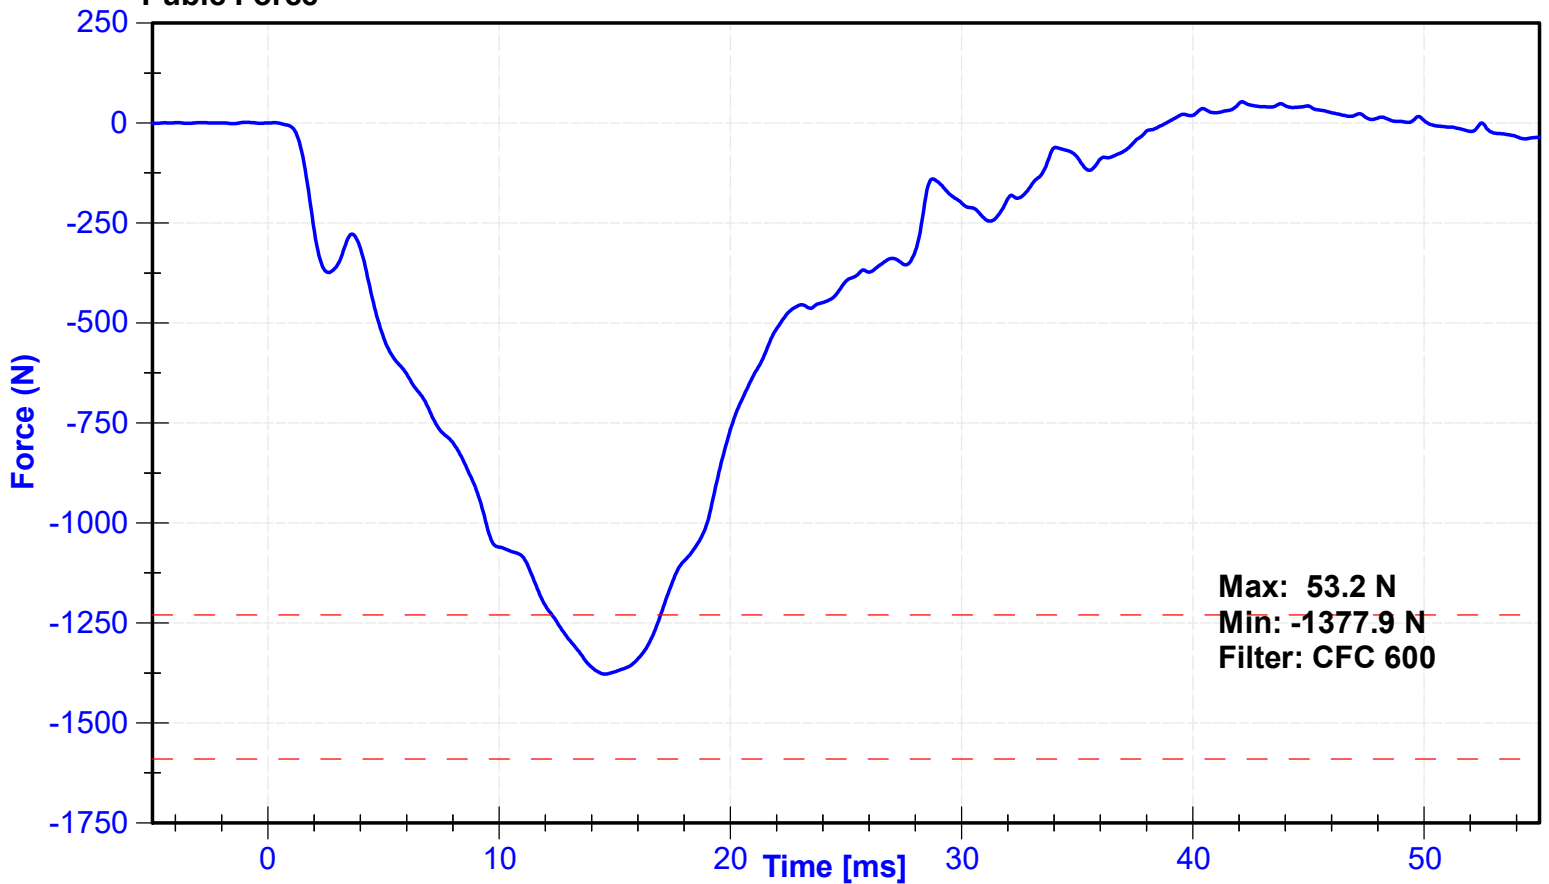


**POST-TEST
ES-2re PERFORMANCE CALIBRATION TEST DATA**

External Measurements - EuroSID-2re

Technician: K. Brogan

Date: 11/30/2022

Dummy Serial Number: D037

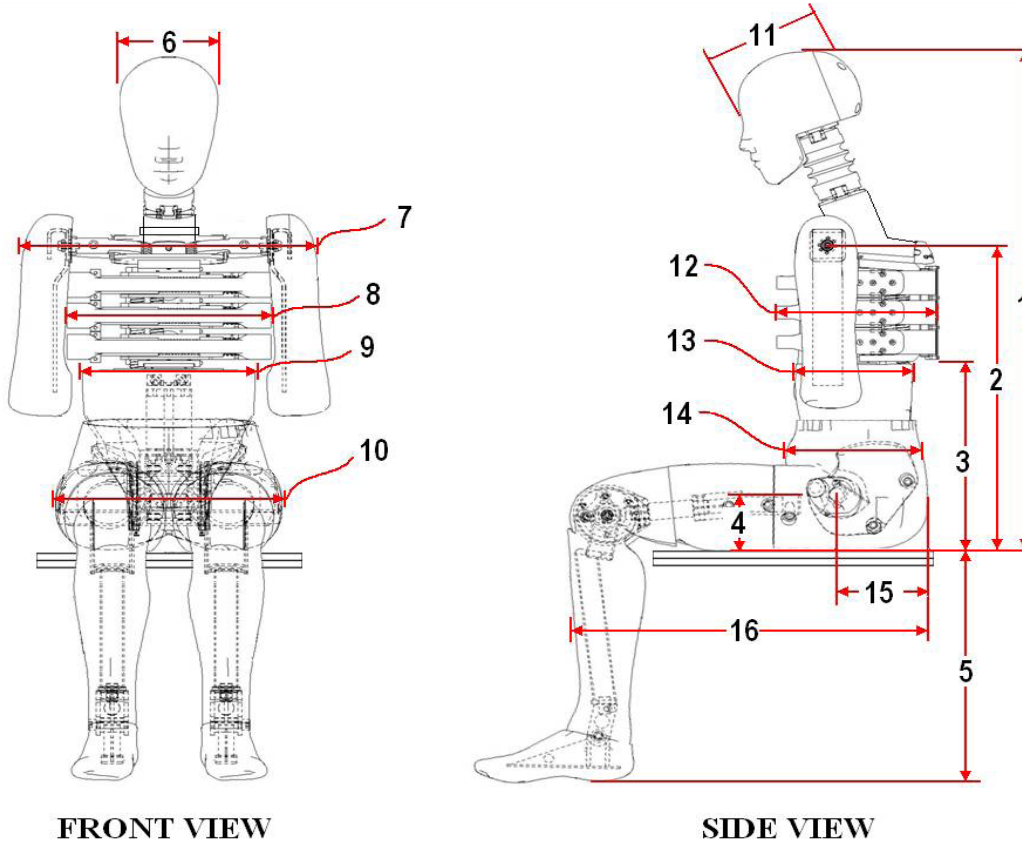

FRONT VIEW

SIDE VIEW

| Dim. No. | Description | Specification (mm) | | Result (mm) | Pass/Fail |
|----------|--|--------------------|-----|-------------|-----------|
| 1 | Sitting Height | 900 | 918 | 909 | Pass |
| 2 | Seat to Shoulder Joint | 558 | 572 | 564 | Pass |
| 3 | Seat to Lower Face of Thoracic Spine Box | 346 | 356 | 349 | Pass |
| 4 | Seat to Hip Joint (center of bolt) | 97 | 103 | 101 | Pass |
| 5 | Sole to Seat, Sitting | 333 | 451 | 422 | Pass |
| 6 | Head Width | 152 | 158 | 155 | Pass |
| 7 | Shoulder/Arm Width | 461 | 479 | 471 | Pass |
| 8 | Thorax Width | 322 | 332 | 328 | Pass |
| 9 | Abdomen Width | 273 | 287 | 280 | Pass |
| 10 | Pelvis Lap Width | 359 | 373 | 365 | Pass |
| 11 | Head Depth | 196 | 206 | 197 | Pass |
| 12 | Thorax Depth | 262 | 272 | 269 | Pass |
| 13 | Abdomen Depth | 194 | 204 | 201 | Pass |
| 14 | Pelvis Depth | 235 | 245 | 241 | Pass |
| 15 | Back of Buttocks to Hip Joint (center of bolt) | 150 | 160 | 157 | Pass |
| 16 | Back of Buttocks to Front Knee | 597 | 615 | 609 | Pass |

| | | | |
|-------------------|--------|-----------------------|--------------|
| ATD Manufacturer | Denton | Test Technician | Z. Schneider |
| ATD Serial Number | D037 | Laboratory Supervisor | C. Mantell |


Results




| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|------------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.0 | Pass |
| Humidity | 10 | 70 | % | 30 | Pass |
| Resultant Acceleration | 125 | 155 | g's | 138.9 | Pass |
| Oscillation | 0 | 15 | % | 1.89 | Pass |
| Fore-Aft Acceleration | -15 | 15 | g's | 8.3 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|--------------|---------------|------------------|----------------------|
| X Accelerometer | Endevco | T21724 | 9/6/2022 | 3/5/2023 |
| Y Accelerometer | Endevco | T22281 | 9/6/2022 | 3/5/2023 |
| Z Accelerometer | Endevco | T26050 | 9/9/2022 | 3/8/2023 |

Resultant Acceleration

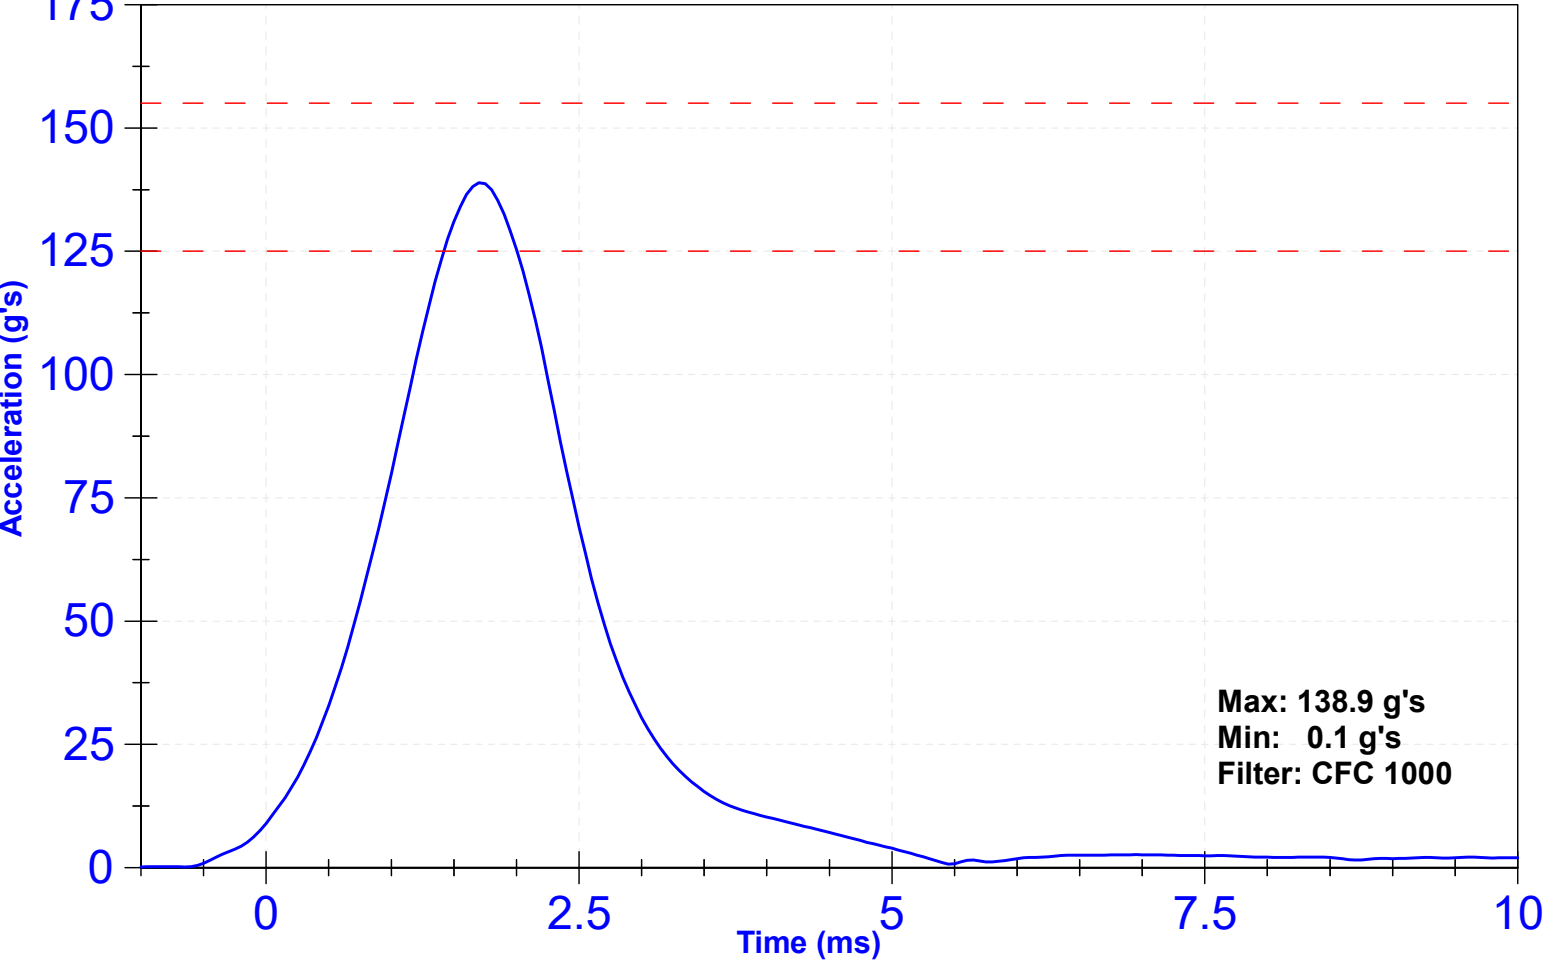

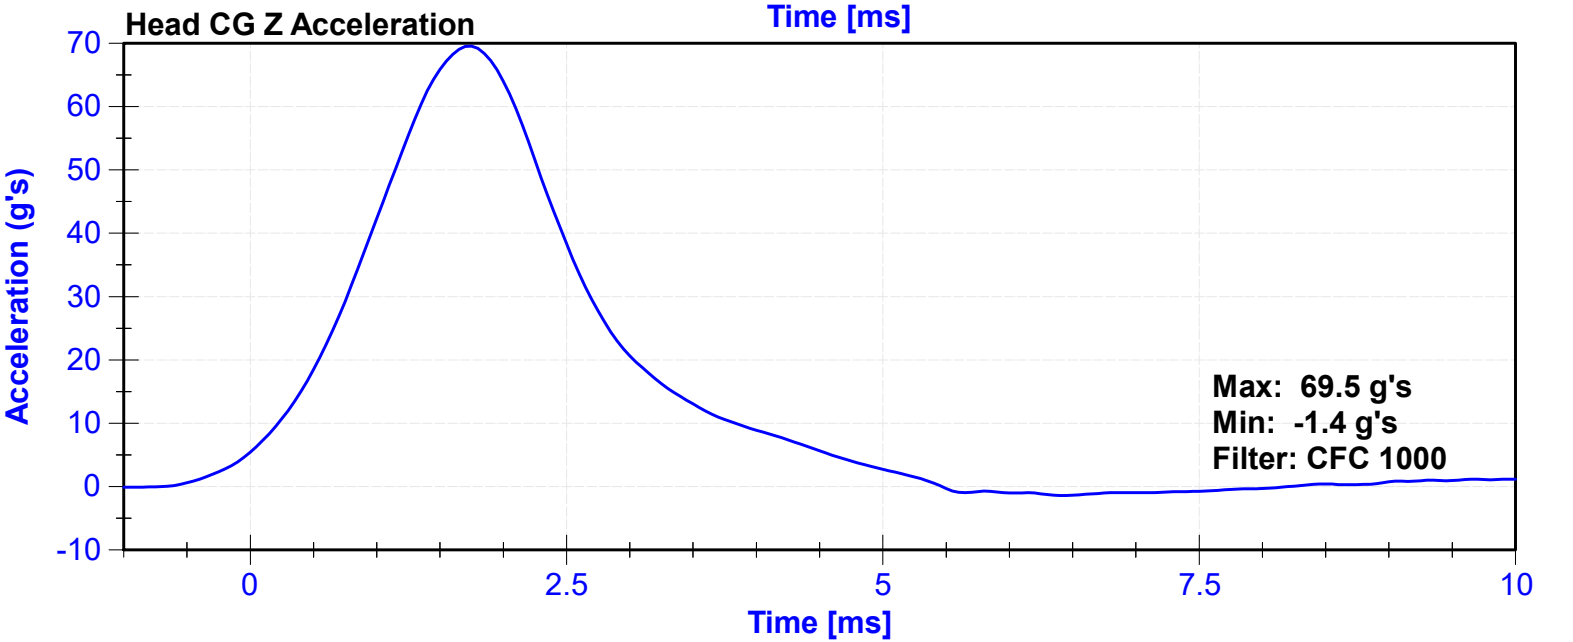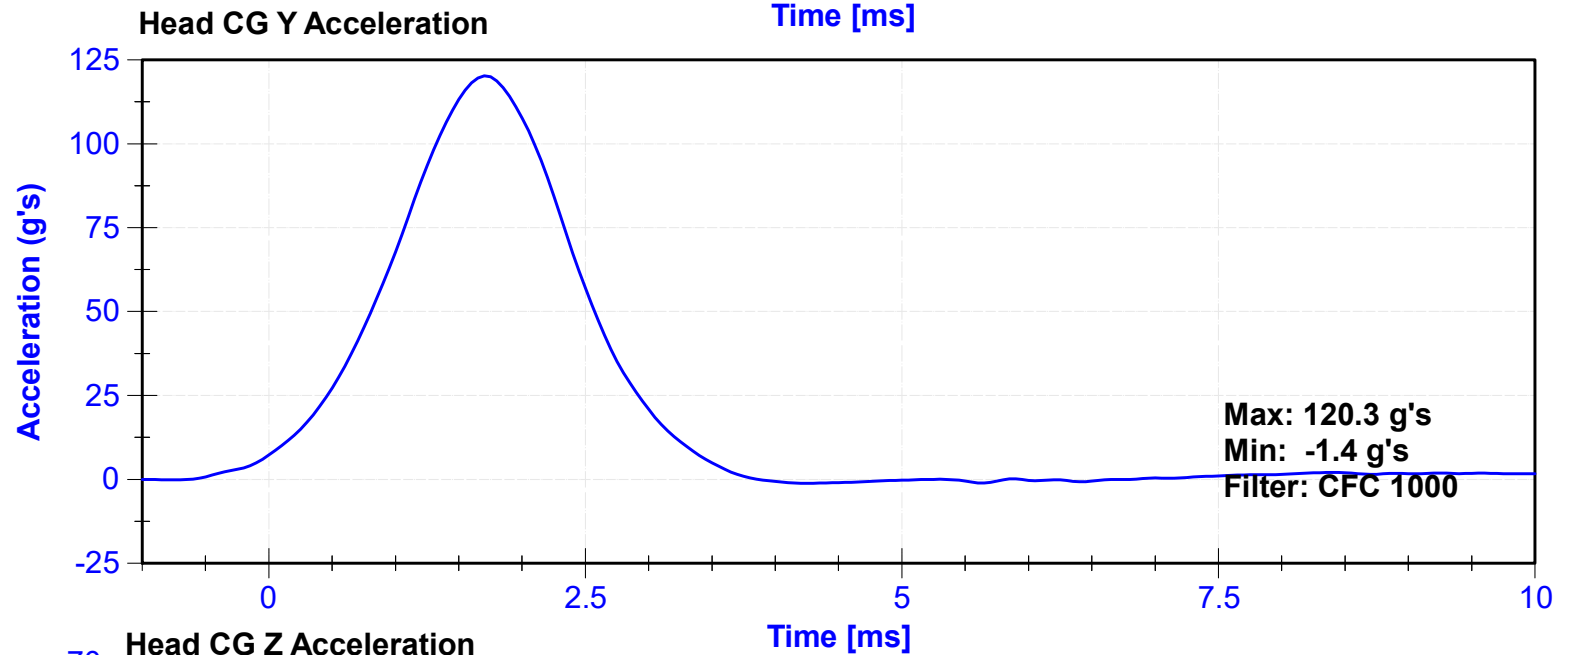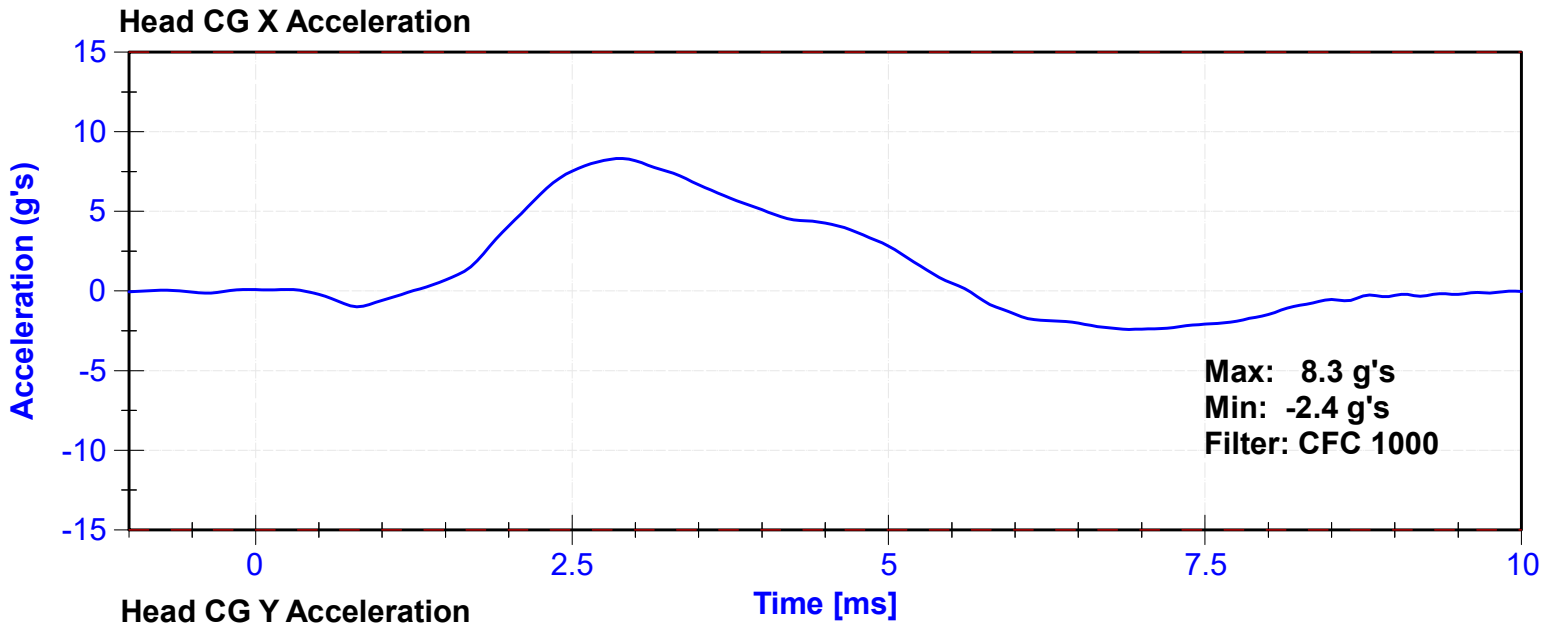


| | | | |
|-------------------|--------|-----------------------|--------------|
| ATD Manufacturer | Denton | Test Technician | Z. Schneider |
| ATD Serial Number | D037 | Laboratory Supervisor | C. Mantell |

Results




| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|-------------------------------------|-----------------------------|-----------------------------|------|-----------------------|-----------|
| Temperature | 20.6 | 22.2 | °C | 22.0 | Pass |
| Humidity | 10 | 70 | % | 30 | Pass |
| Velocity | 3.3 | 3.5 | m/s | 3.42 | Pass |
| Lateral Neck Rotation | 49 | 59 | deg | 53.9 | Pass |
| Time at Maximum Rotation | 54 | 66 | ms | 56.1 | Pass |
| Time of Rotation Decay from Maximum | 53 | 88 | ms | 58.9 | Pass |
| Pendulum Velocity Overall Corridor | Lower Boundary ¹ | Upper Boundary ² | m/s | See Plot ³ | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|------------------------------|--------------|---------------|------------------|----------------------|
| Pendulum Accelerometer | Endevco | C16503 | 10/26/2022 | 10/26/2023 |
| Front Pendulum Potentiometer | Sfernice | 094 | 10/5/2022 | 10/5/2023 |
| Headform Potentiometer | Sfernice | 095 | 10/5/2022 | 10/5/2023 |

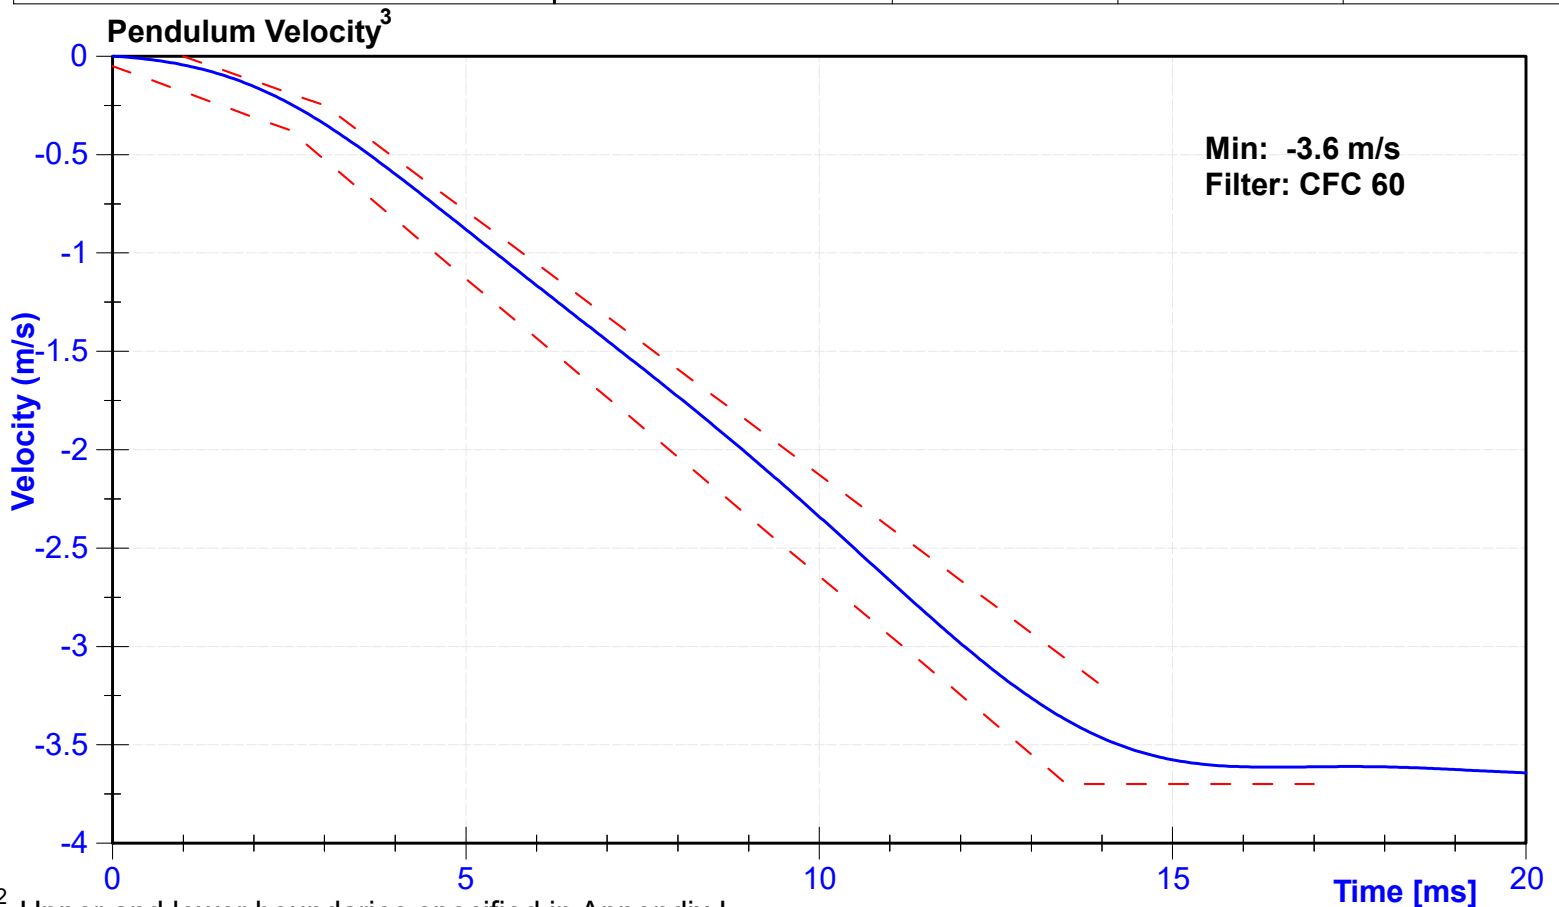

^{1,2} Upper and lower boundaries specified in Appendix I

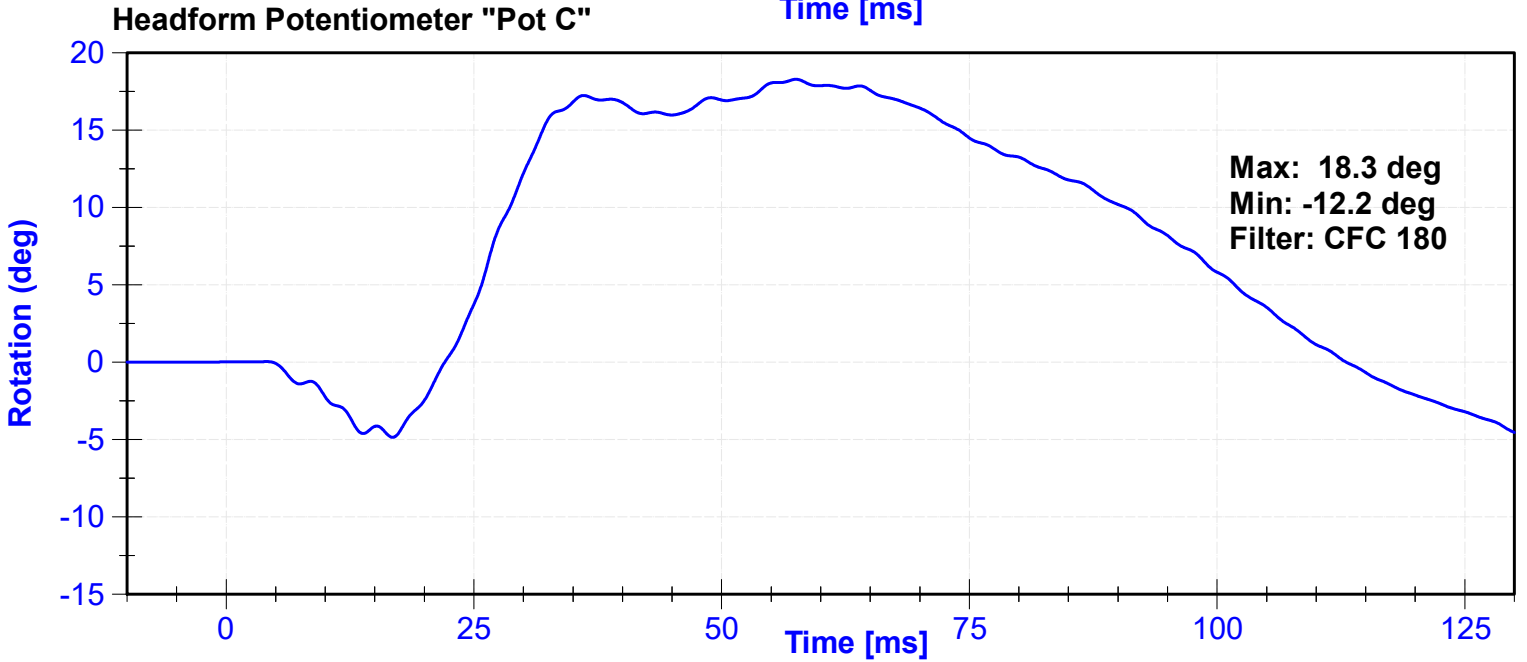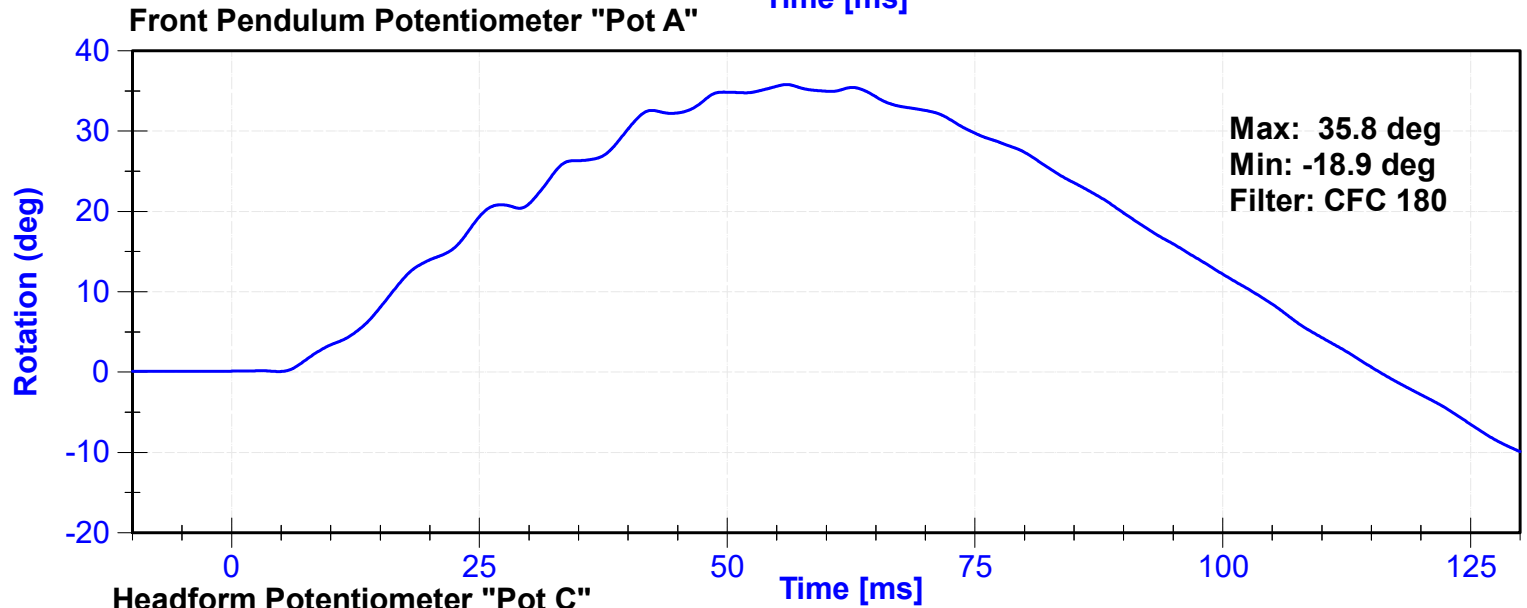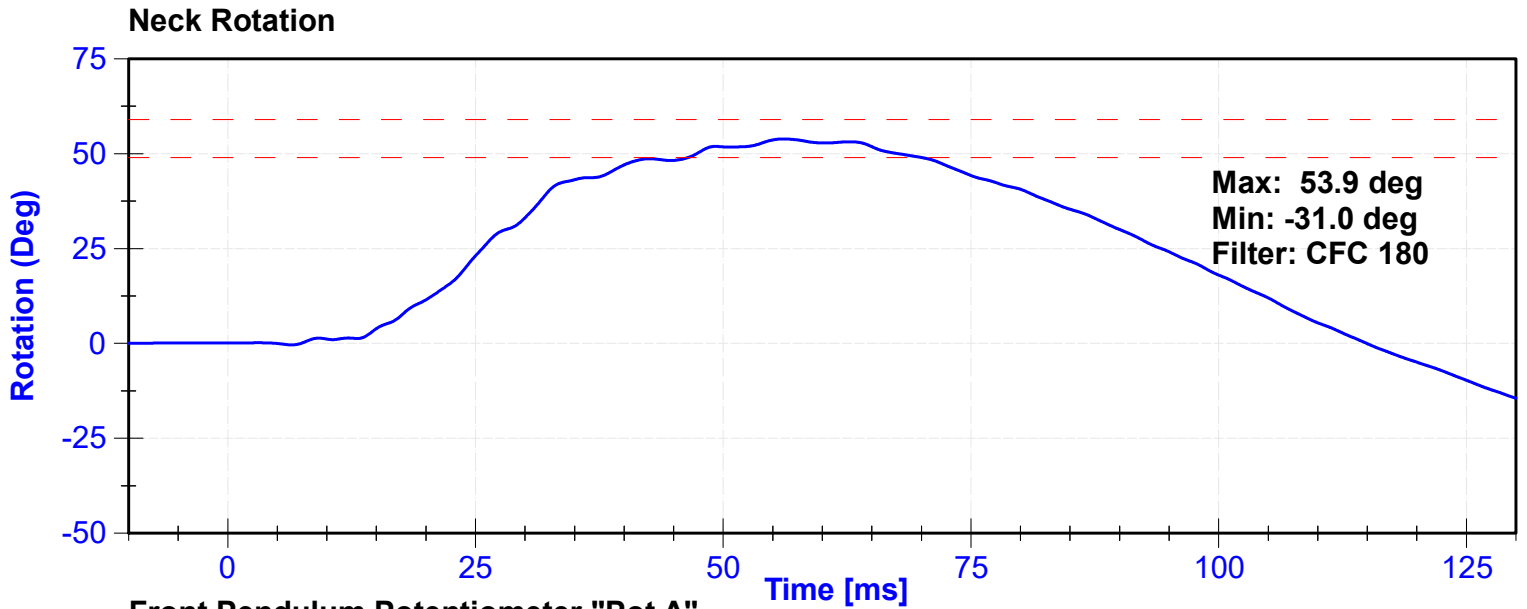

Appendix I

| ² Upper Boundary Corridor | | ¹ Lower Boundary Corridor | |
|--------------------------------------|----------------|--------------------------------------|----------------|
| Time (ms) | Velocity (m/s) | Time (ms) | Velocity (m/s) |
| 1.0 | 0.00 | 0.0 | -0.05 |
| 3.0 | -0.25 | 2.5 | -0.375 |
| 14.0 | -3.20 | 13.5 | -3.7 |
| | | 17.0 | -3.7 |

| | | | |
|-------------------|--------|-----------------------|--------------|
| ATD Manufacturer | Denton | Test Technician | Z. Schneider |
| ATD Serial Number | D037 | Laboratory Supervisor | C. Mantell |


Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|--------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21 | Pass |
| Humidity | 10 | 70 | % | 30 | Pass |
| Velocity | 4.2 | 4.4 | m/s | 4.34 | Pass |
| Probe Acceleration | 7.5 | 10.5 | g's | 9.97 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------------------|--------------|---------------|------------------|----------------------|
| Probe Accelerometer | Endevco | P51736 | 10/25/2022 | 4/23/2023 |

Probe Acceleration

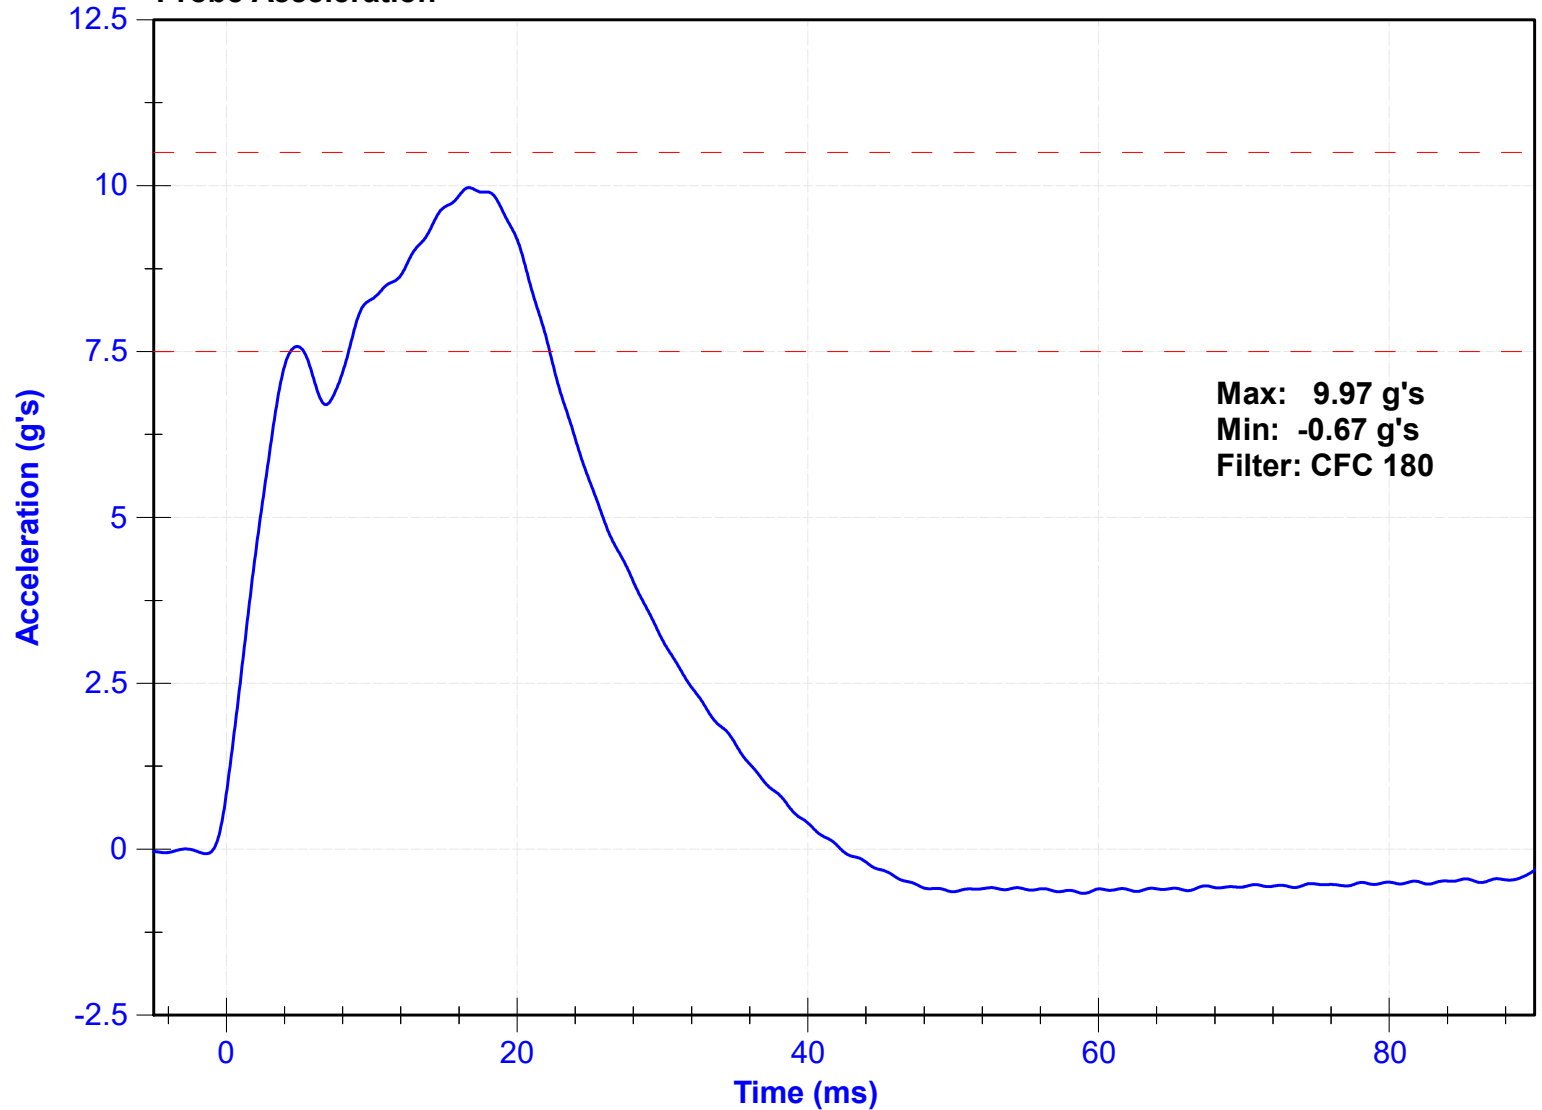


| | | | |
|-------------------|--------|-----------------------|--------------|
| ATD Manufacturer | Denton | Test Technician | Z. Schneider |
| ATD Serial Number | D037 | Laboratory Supervisor | C. Mantell |

Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.0 | Pass |
| Humidity | 10 | 70 | % | 30 | Pass |
| Rib Displacement | 46 | 51 | mm | 49.8 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|-------------------|--------------|---------------|------------------|----------------------|
| Rib Potentiometer | Honeywell | DS-0552-01 | 9/7/2022 | 3/8/2023 |

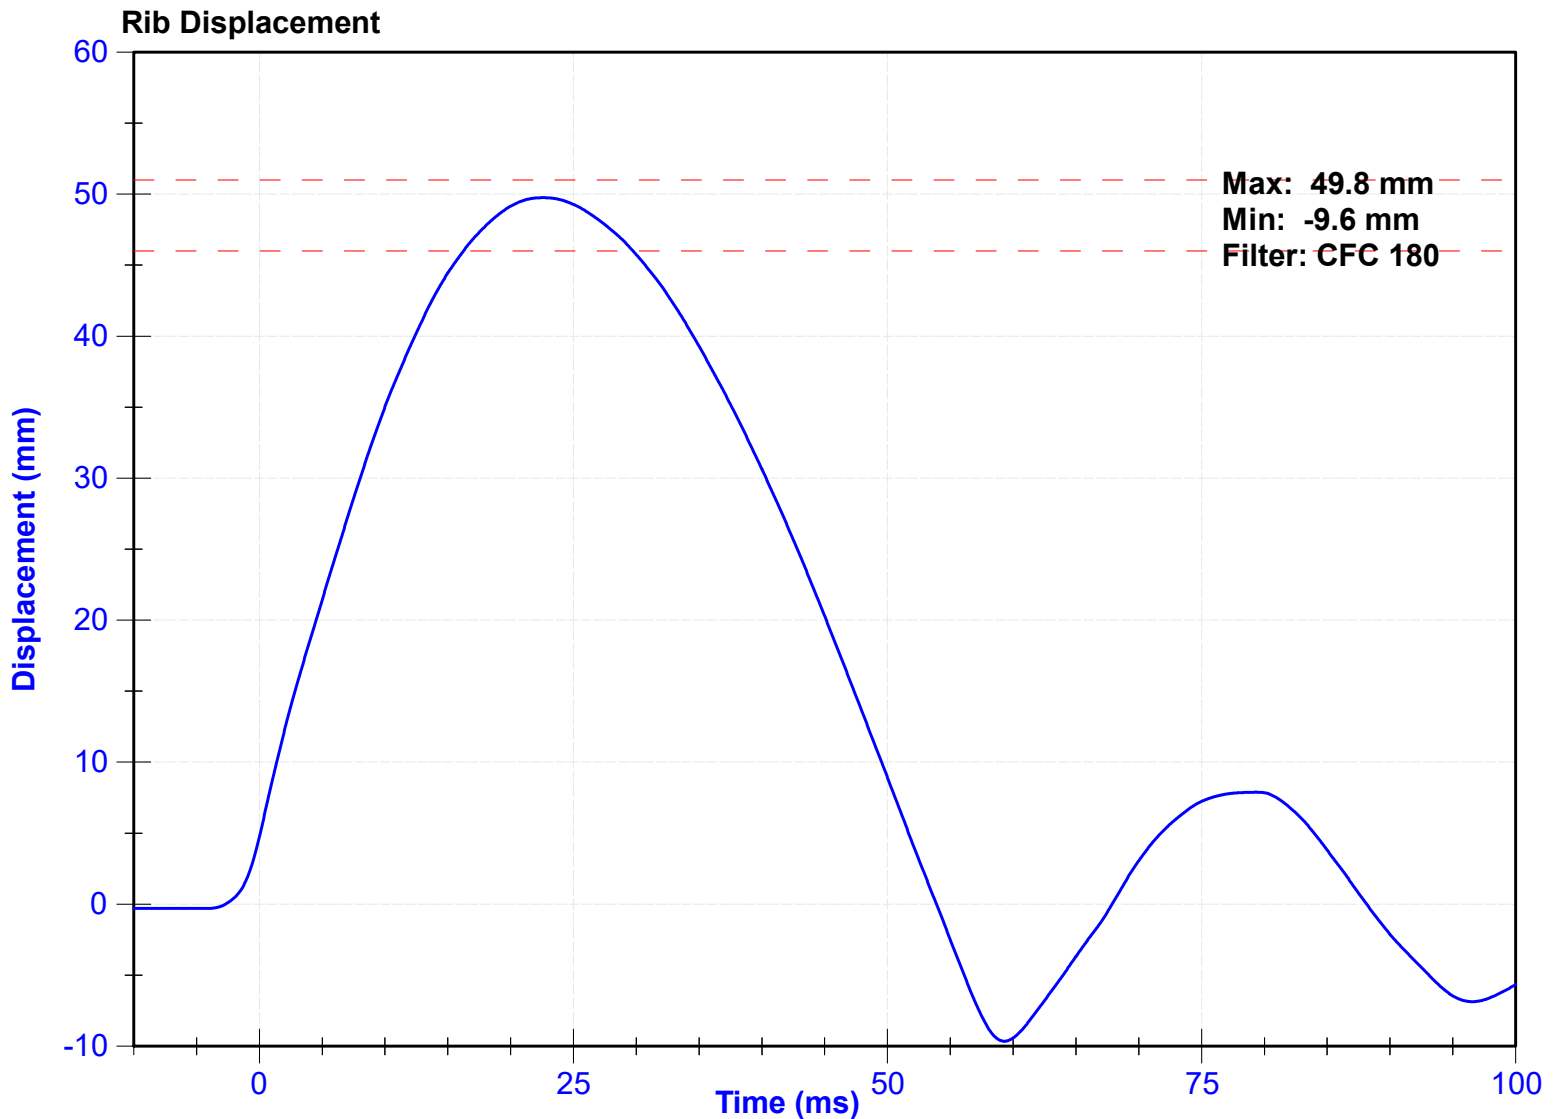


| | | | |
|-------------------|--------|-----------------------|--------------|
| ATD Manufacturer | Denton | Test Technician | Z. Schneider |
| ATD Serial Number | D037 | Laboratory Supervisor | C. Mantell |

Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.0 | Pass |
| Humidity | 10 | 70 | % | 30 | Pass |
| Rib Displacement | 36 | 40 | mm | 38.3 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|-------------------|--------------|---------------|------------------|----------------------|
| Rib Potentiometer | Honeywell | DS-0552-01 | 9/7/2022 | 3/8/2023 |

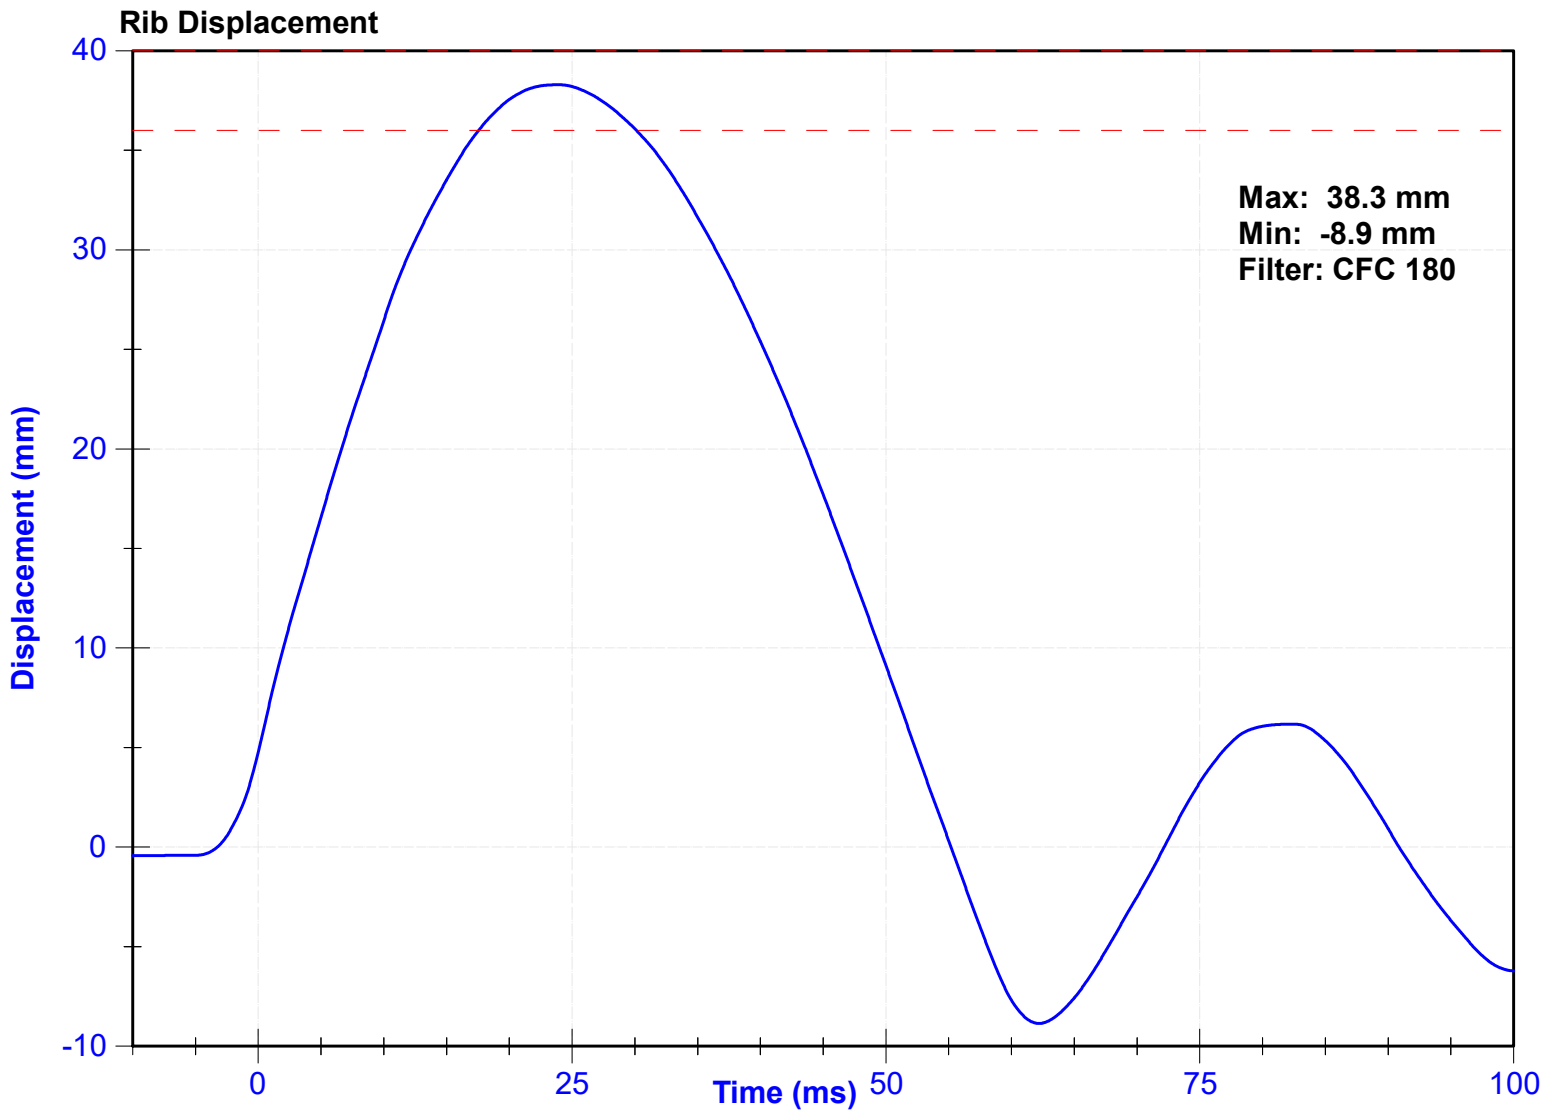


| | | | |
|-------------------|--------|-----------------------|--------------|
| ATD Manufacturer | Denton | Test Technician | Z. Schneider |
| ATD Serial Number | D037 | Laboratory Supervisor | C. Mantell |

Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.0 | Pass |
| Humidity | 10 | 70 | % | 30 | Pass |
| Rib Displacement | 46 | 51 | mm | 49.7 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|-------------------|--------------|---------------|------------------|----------------------|
| Rib Potentiometer | Honeywell | DS-807 | 9/7/2022 | 3/8/2023 |

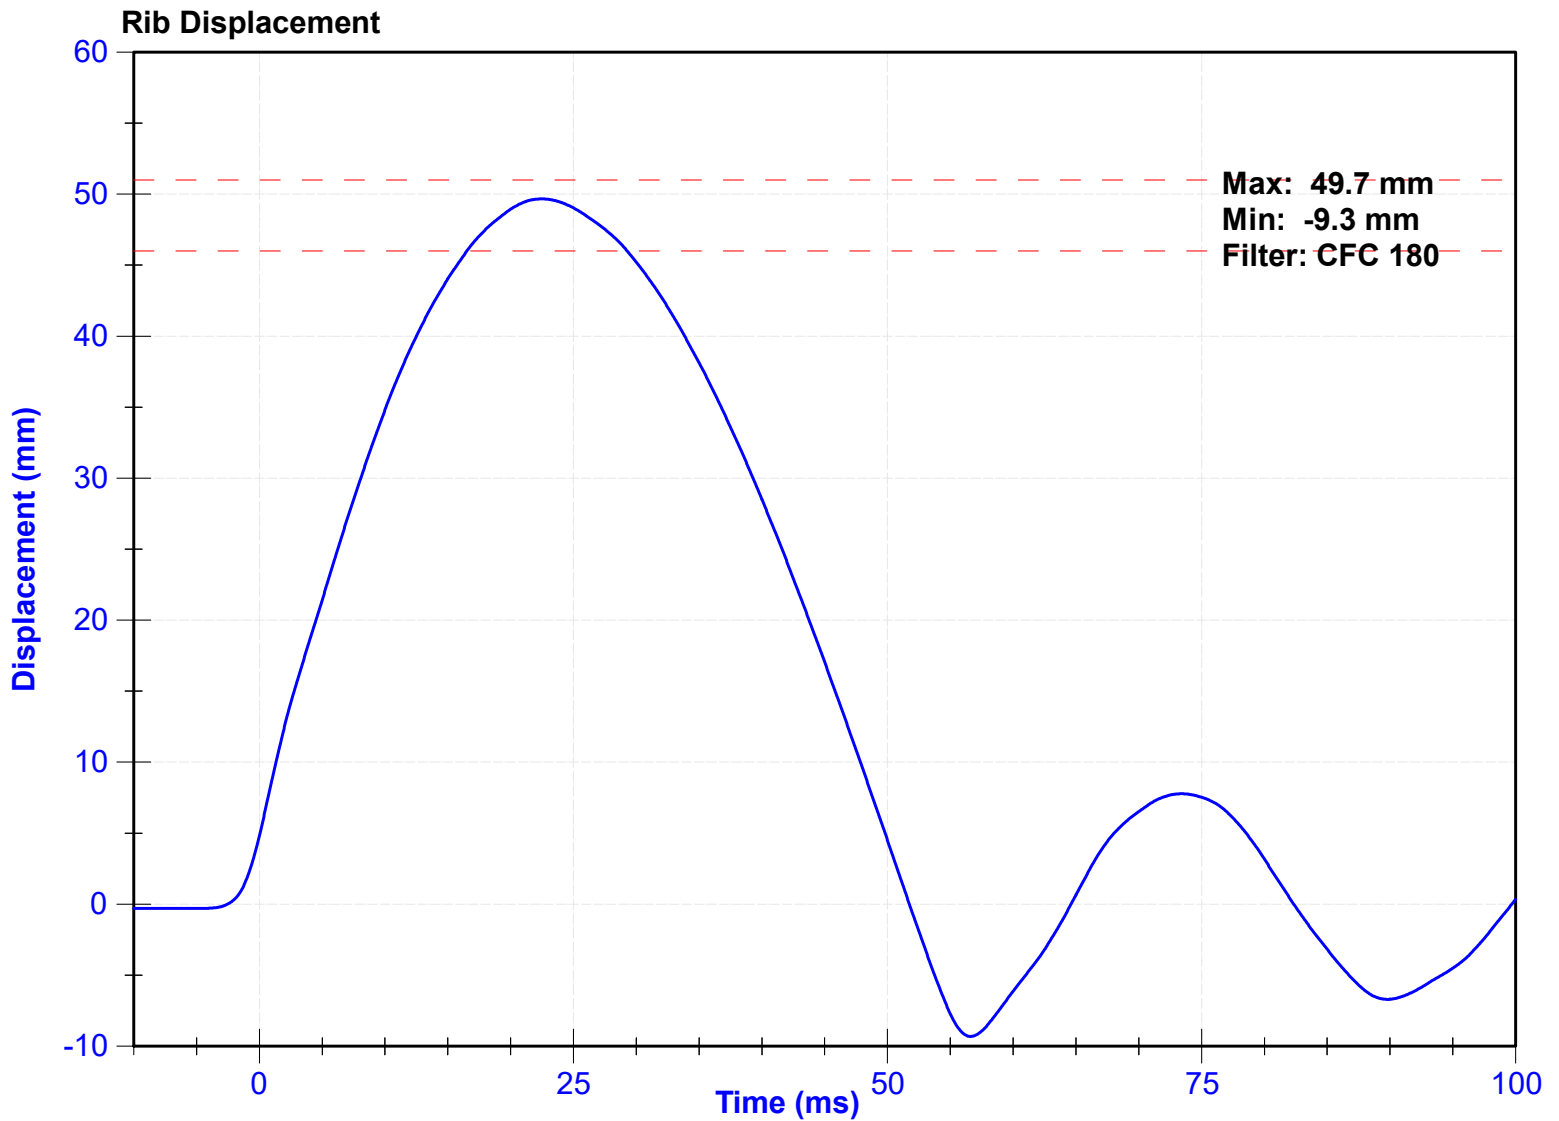


| | | | |
|-------------------|--------|-----------------------|--------------|
| ATD Manufacturer | Denton | Test Technician | Z. Schneider |
| ATD Serial Number | D037 | Laboratory Supervisor | C. Mantell |

Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.0 | Pass |
| Humidity | 10 | 70 | % | 30 | Pass |
| Rib Displacement | 36 | 40 | mm | 38.4 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|-------------------|--------------|---------------|------------------|----------------------|
| Rib Potentiometer | Honeywell | DS-807 | 9/7/2022 | 3/8/2023 |

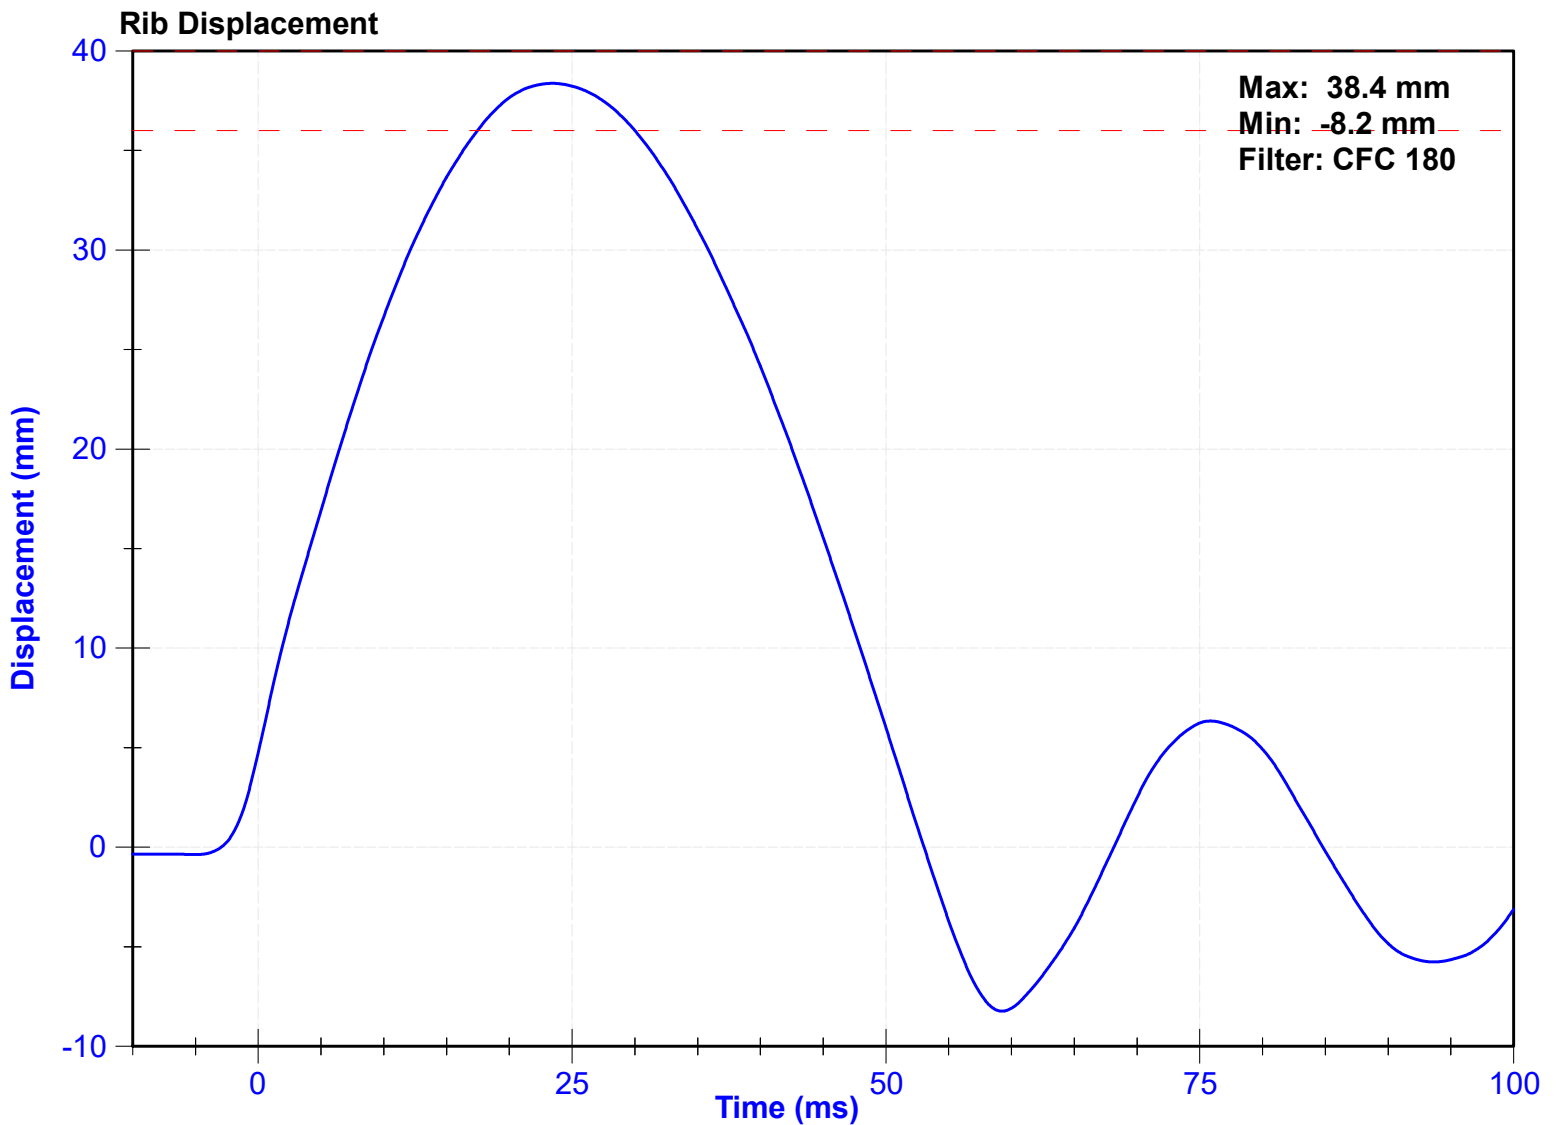


| | | | |
|-------------------|--------|-----------------------|--------------|
| ATD Manufacturer | Denton | Test Technician | Z. Schneider |
| ATD Serial Number | D037 | Laboratory Supervisor | C. Mantell |

Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.0 | Pass |
| Humidity | 10 | 70 | % | 30 | Pass |
| Rib Displacement | 46 | 51 | mm | 48.9 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|-------------------|--------------|---------------|------------------|----------------------|
| Rib Potentiometer | Honeywell | DS-0552-03 | 9/7/2022 | 3/8/2023 |

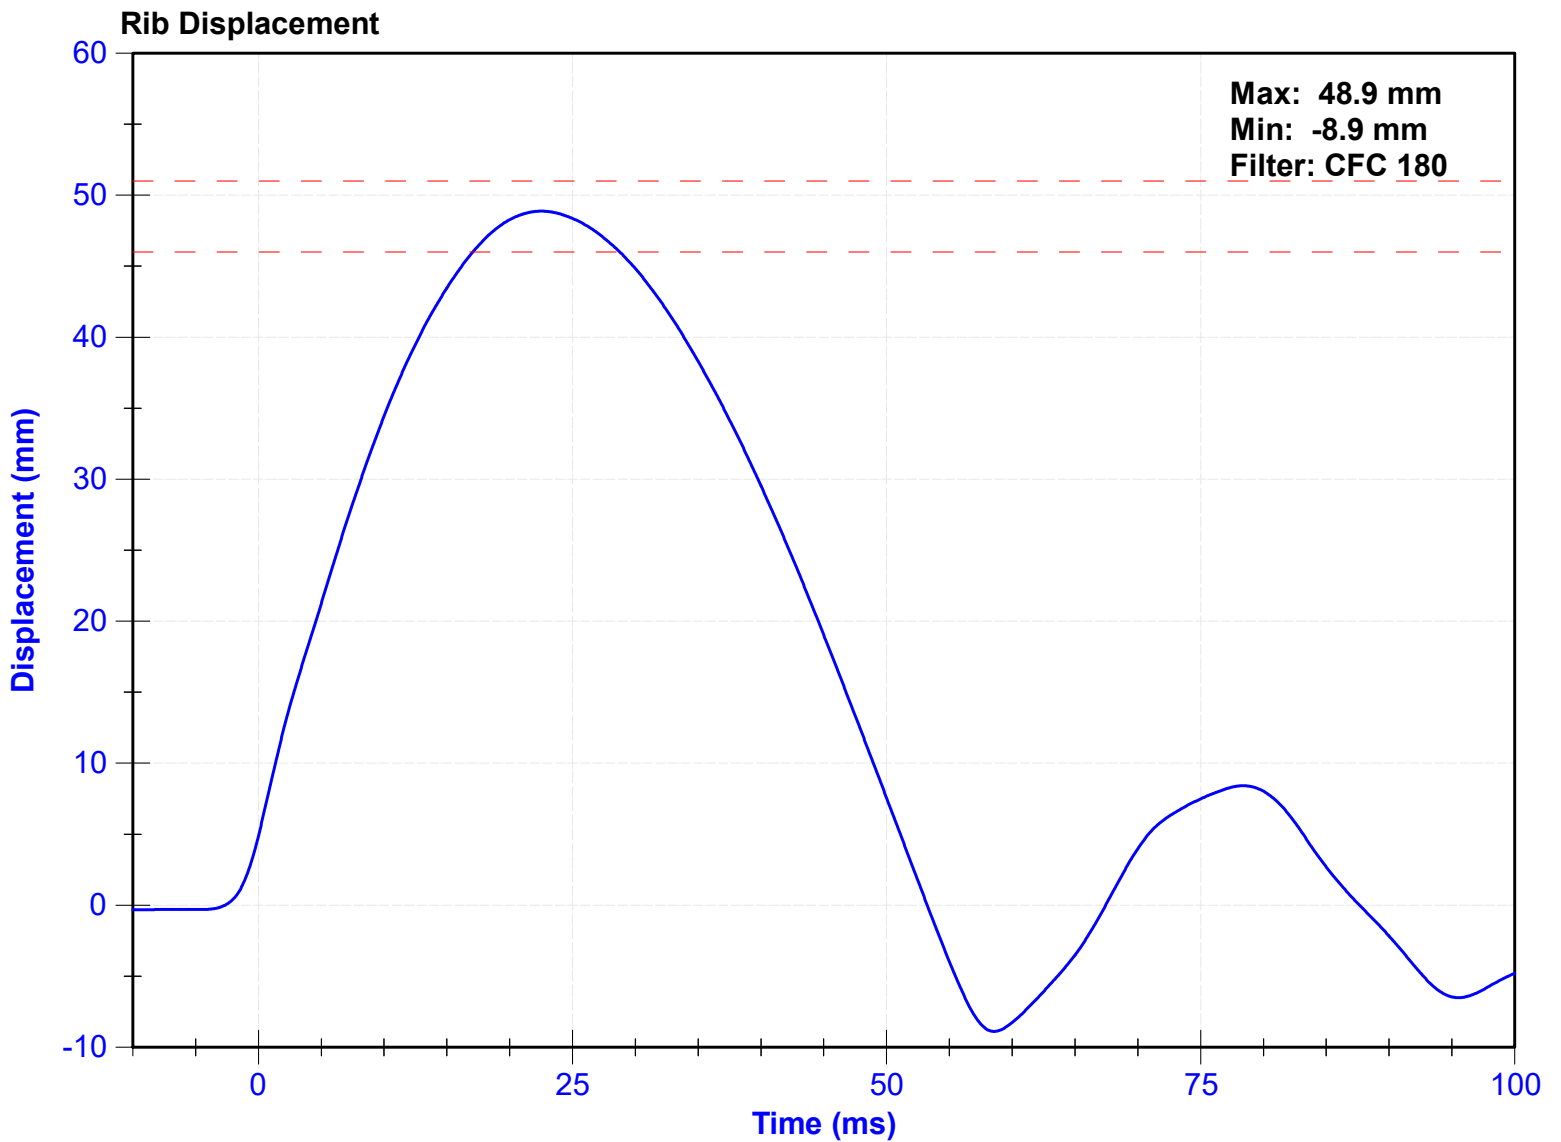


| | | | |
|-------------------|--------|-----------------------|--------------|
| ATD Manufacturer | Denton | Test Technician | Z. Schneider |
| ATD Serial Number | D037 | Laboratory Supervisor | C. Mantell |

Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.0 | Pass |
| Humidity | 10 | 70 | % | 30 | Pass |
| Rib Displacement | 36 | 40 | mm | 37.9 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|-------------------|--------------|---------------|------------------|----------------------|
| Rib Potentiometer | Honeywell | DS-0552-03 | 9/7/2022 | 3/8/2023 |

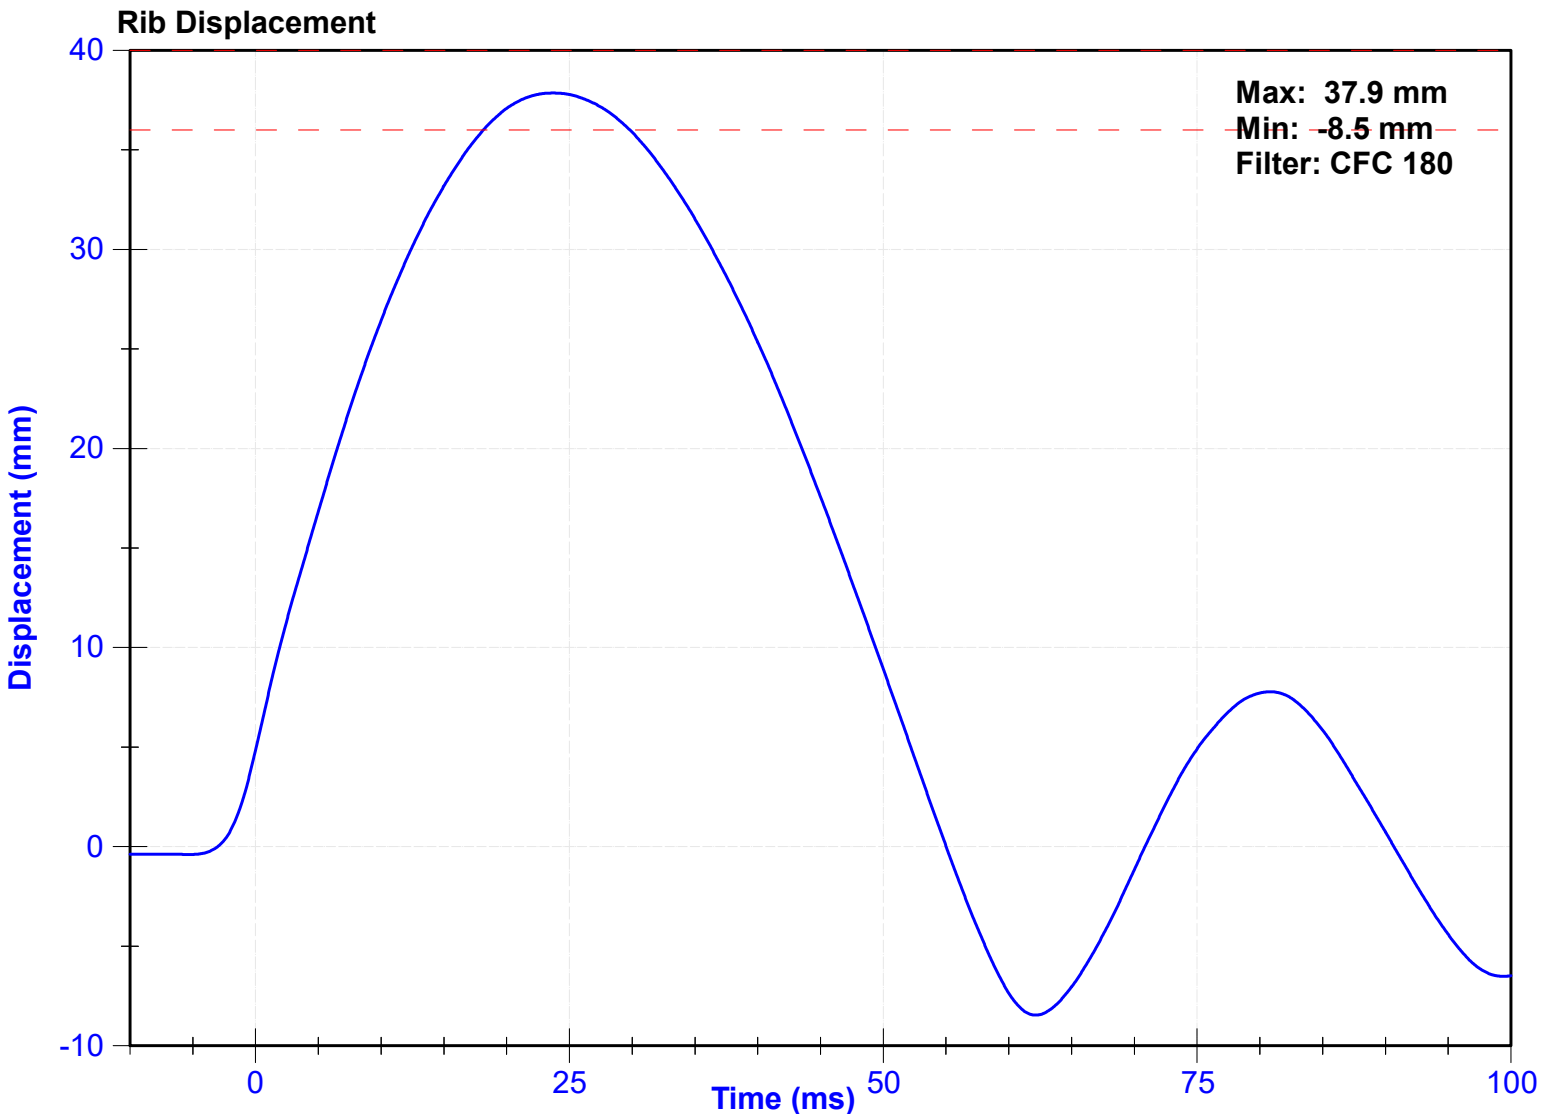

| | | | |
|-------------------|--------|-----------------------|-------------|
| ATD Manufacturer | Denton | Test Technician | Z.Schneider |
| ATD Serial Number | D037 | Laboratory Supervisor | C. Mantell |


Results





| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|-----------------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21 | Pass |
| Humidity | 10 | 70 | % | 30 | Pass |
| Velocity | 5.4 | 5.6 | m/s | 5.52 | Pass |
| Resistive Force after 6ms | 5100 | 6200 | N | 5853.4 | Pass |
| Upper Thorax Rib Deflection | 34 | 41 | mm | 38.5 | Pass |
| Mid Thorax Rib Deflection | 37 | 45 | mm | 41.5 | Pass |
| Lower Thorax Rib Deflection | 37 | 44 | mm | 40.9 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------------------------------|--------------|---------------|------------------|----------------------|
| Probe Accelerometer | Endevco | P51736 | 10/25/2022 | 4/23/2023 |
| Upper Thorax Rib Potentiometer | Honeywell | DS-0552-01 | 9/7/2022 | 3/8/2023 |
| Middle Thorax Rib Potentiometer | Honeywell | DS-807 | 9/7/2022 | 3/8/2023 |
| Lower Thorax Rib Potentiometer | Honeywell | DS-0552-03 | 9/7/2022 | 3/8/2023 |

Probe Acceleration

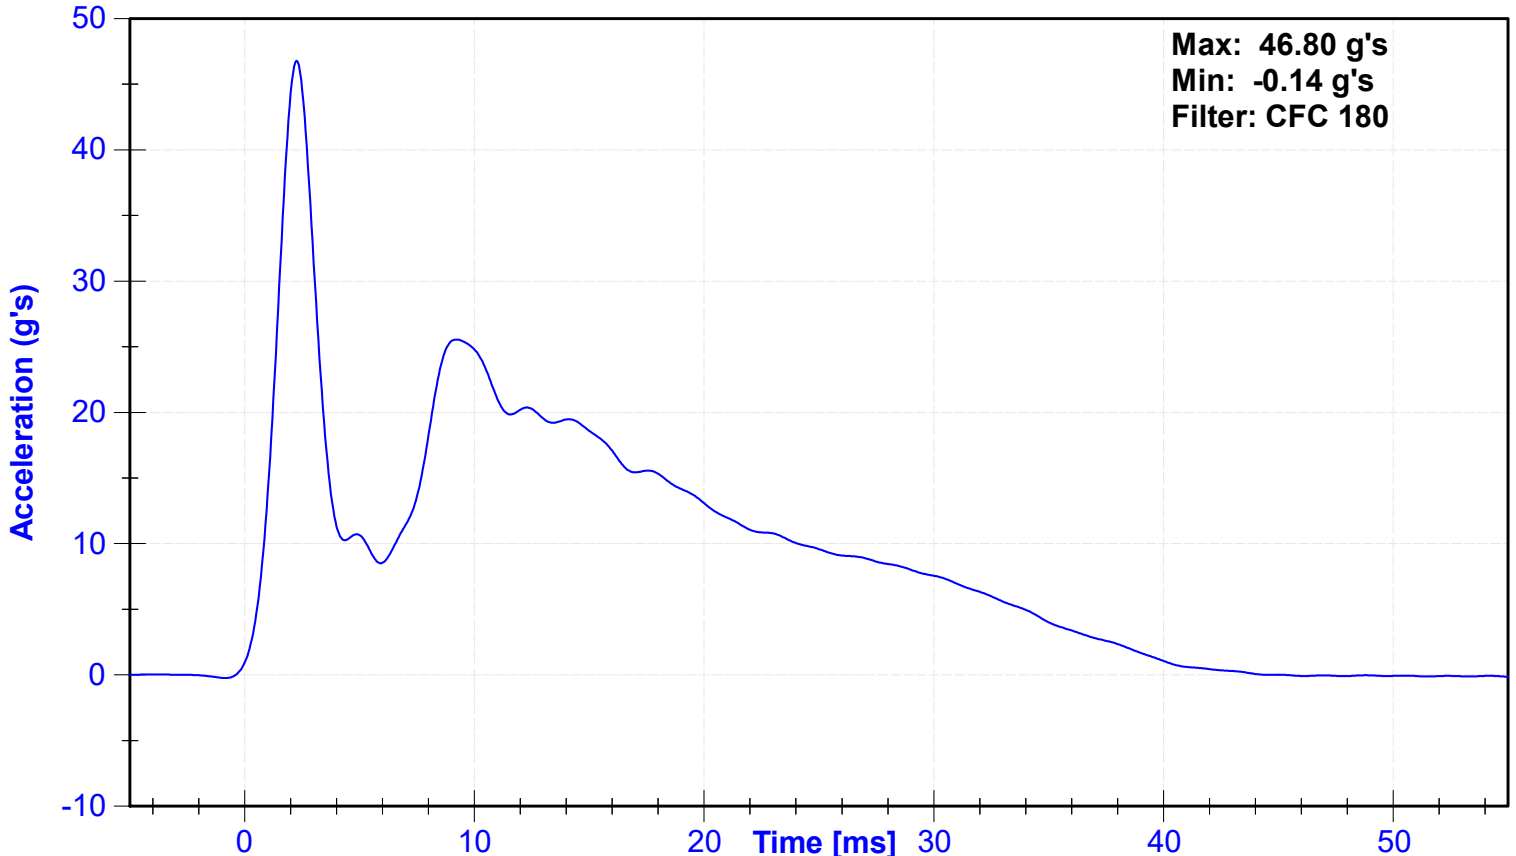

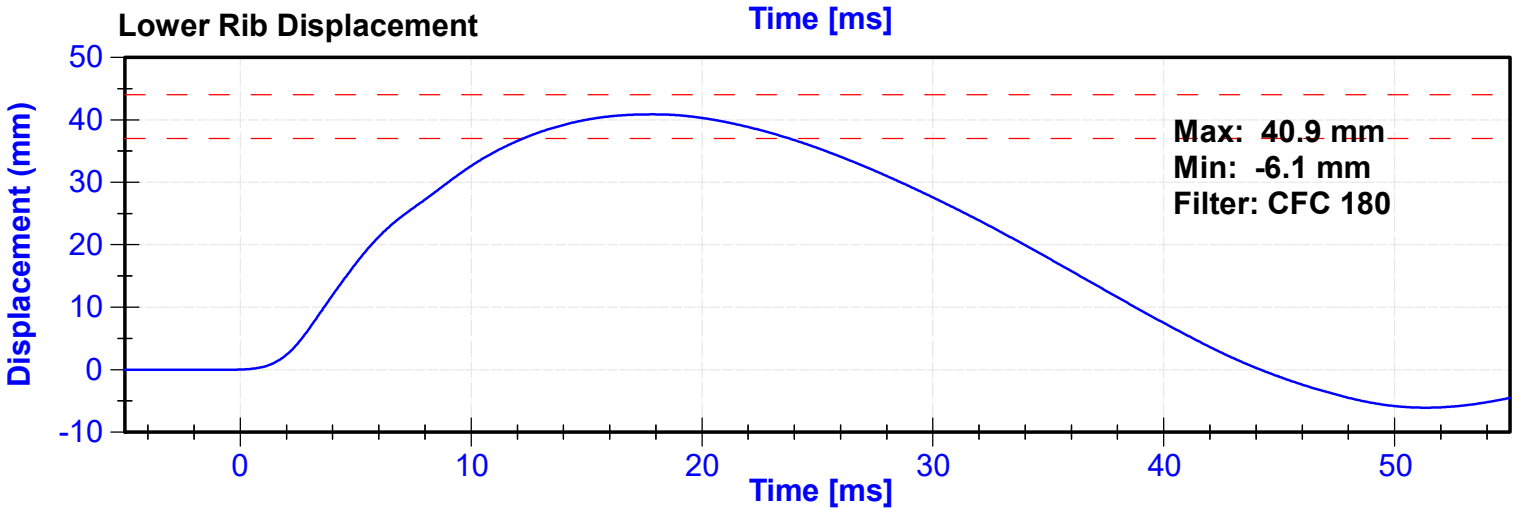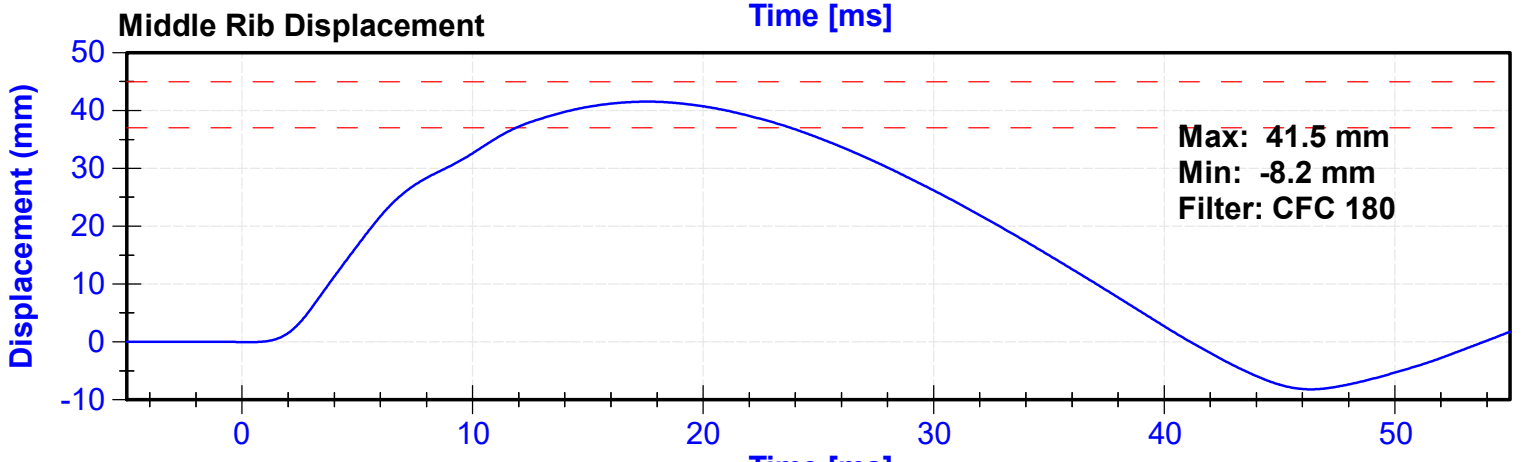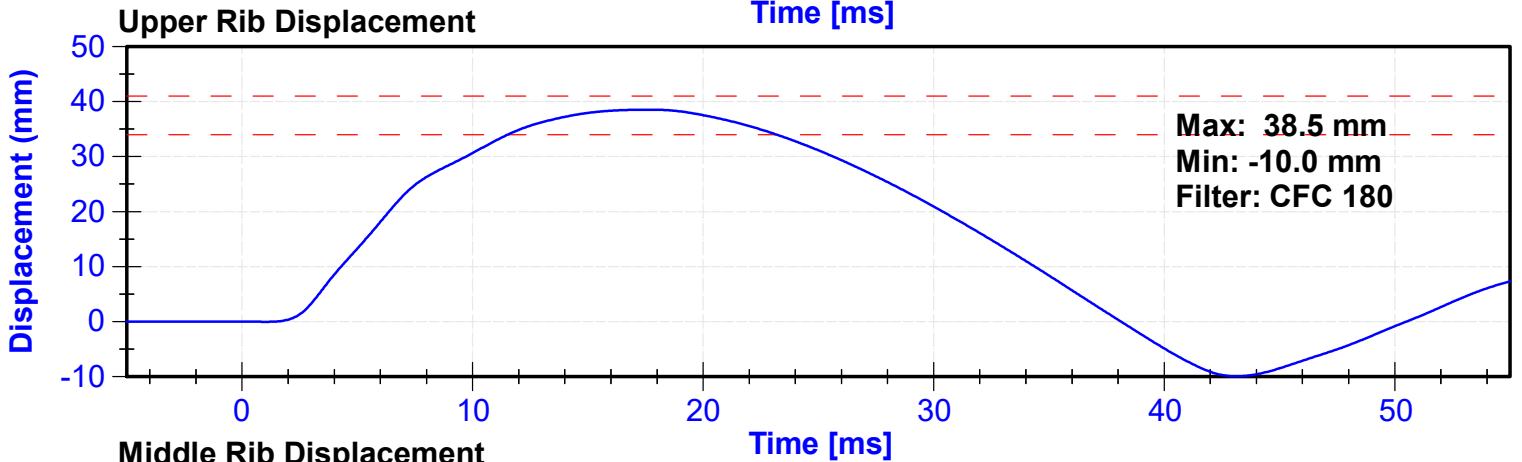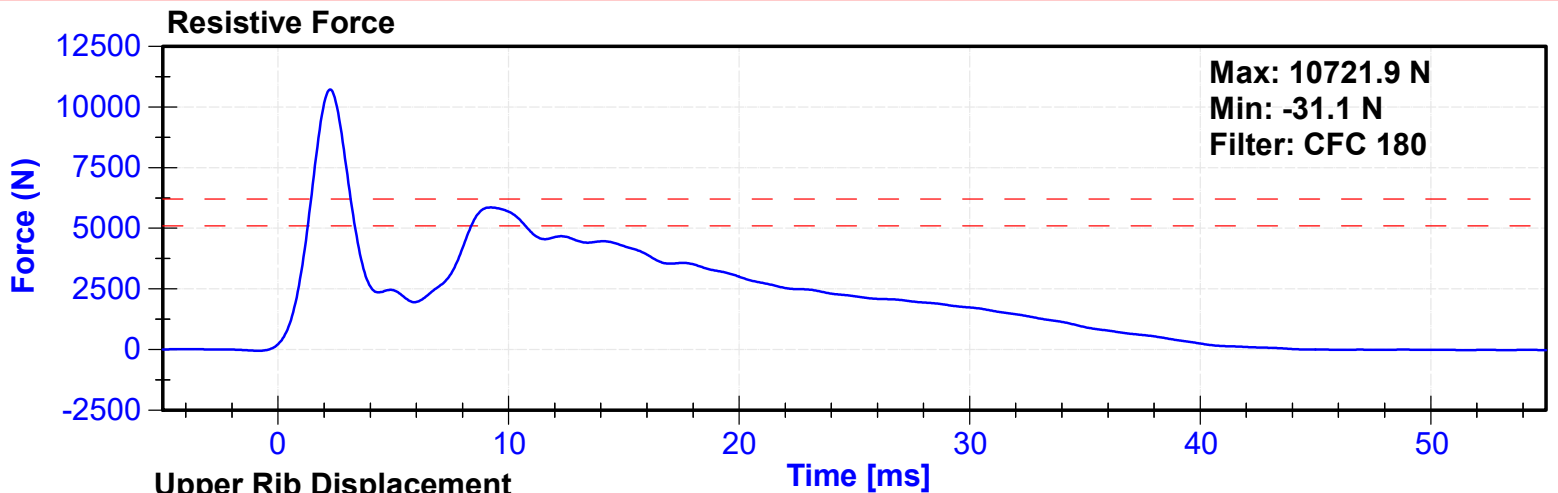

| | | | |
|-------------------|--------|-----------------------|-------------|
| ATD Manufacturer | Denton | Test Technician | Z.Schneider |
| ATD Serial Number | D037 | Laboratory Supervisor | C. Mantell |


Results





| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|------------------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21 | Pass |
| Humidity | 10 | 70 | % | 30 | Pass |
| Velocity | 3.9 | 4.1 | m/s | 4.03 | Pass |
| Combined Abdomen Force | 2200 | 2700 | N | 2205.8 | Pass |
| Time at Peak Abdomen Force | 10.0 | 12.3 | ms | 10.75 | Pass |
| Resistive Probe Force | 4000 | 4800 | N | 4540.8 | Pass |
| Time at Peak Resistive Force | 10.6 | 13.0 | ms | 11.40 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|--------------------------|--------------|---------------|------------------|----------------------|
| Pendulum Accelerometer | Endevco | P51736 | 10/25/2022 | 4/23/2023 |
| Front Abdomen Load Cell | Denton | 1440 | 8/12/2022 | 8/12/2023 |
| Middle Abdomen Load Cell | Denton | 1525 | 8/12/2022 | 8/12/2023 |
| Rear Abdomen Load Cell | Denton | 1528 | 8/12/2022 | 8/12/2023 |

Probe Force

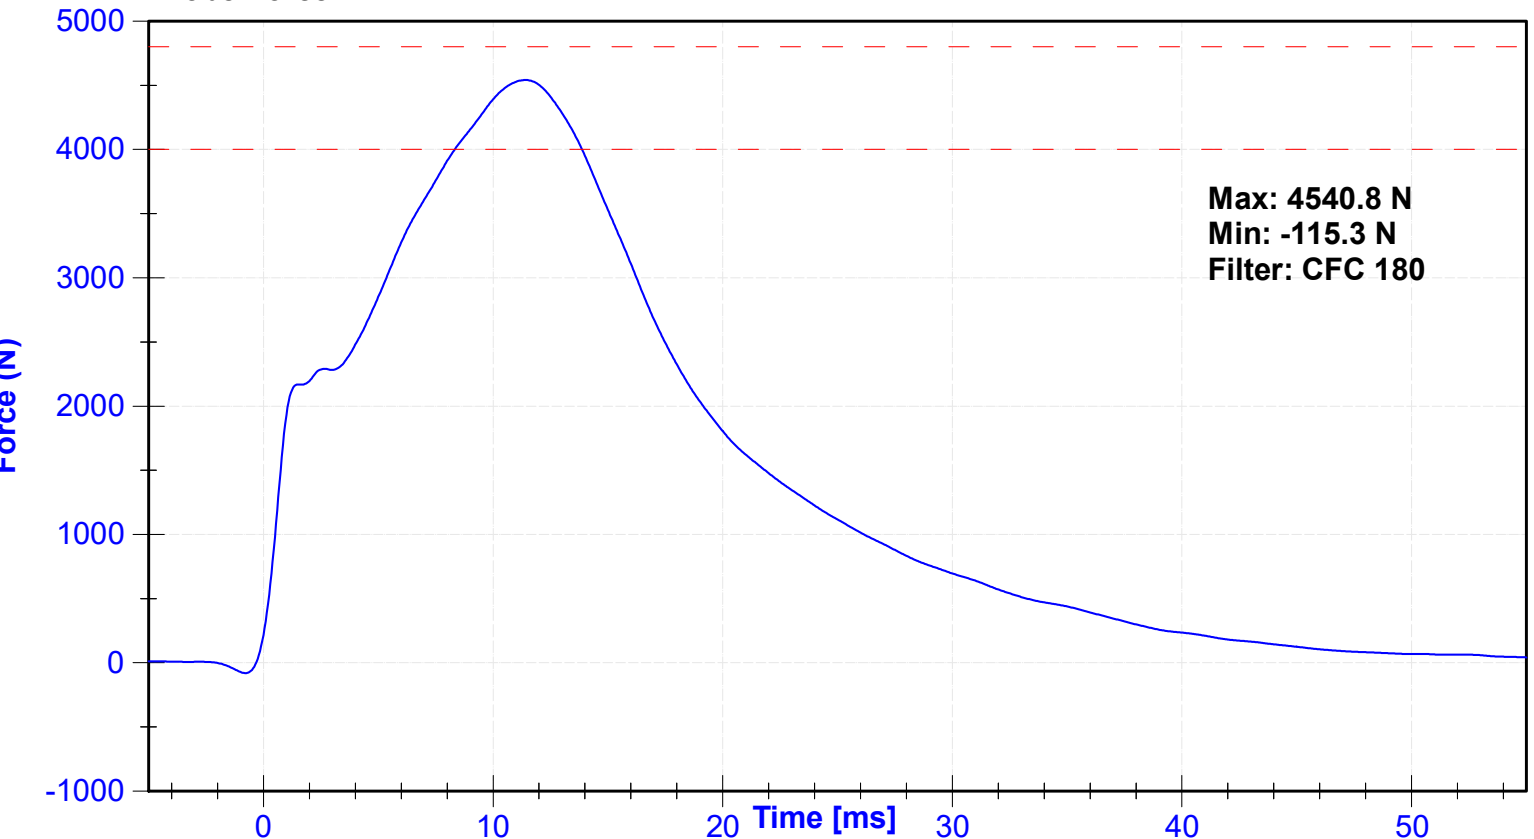

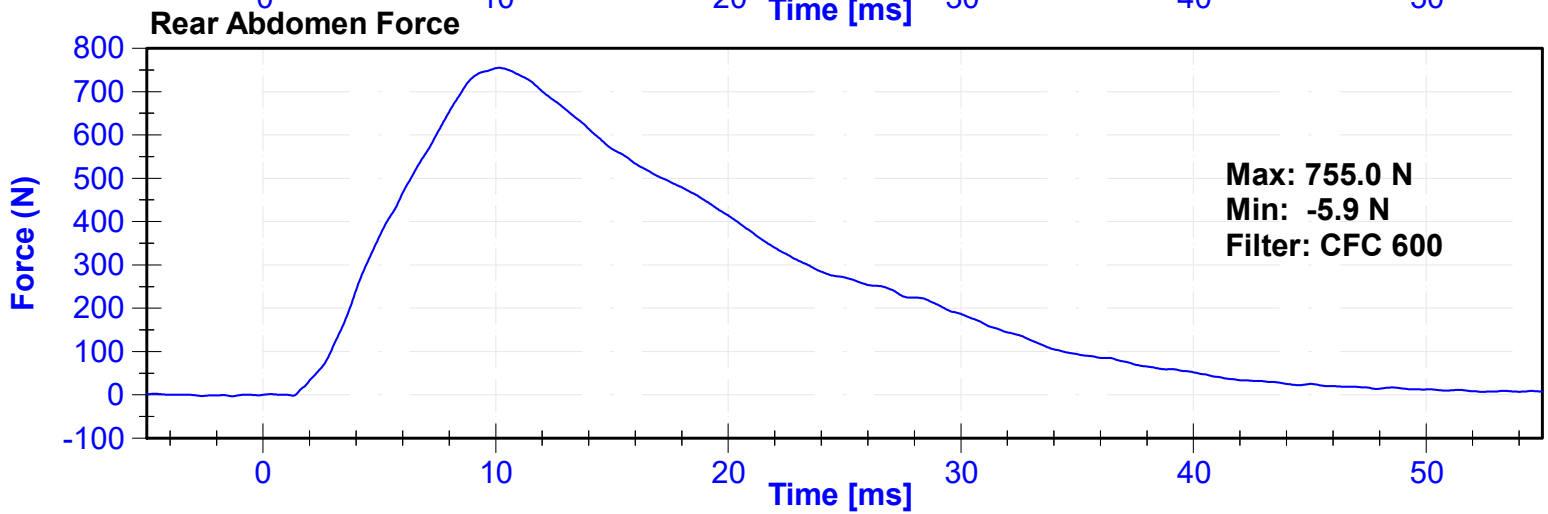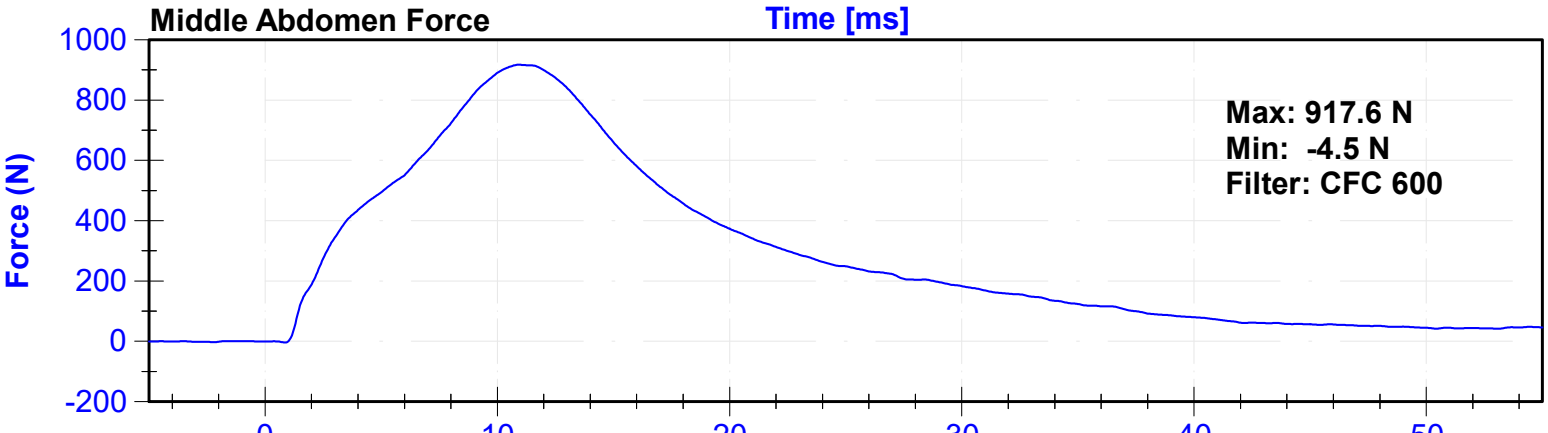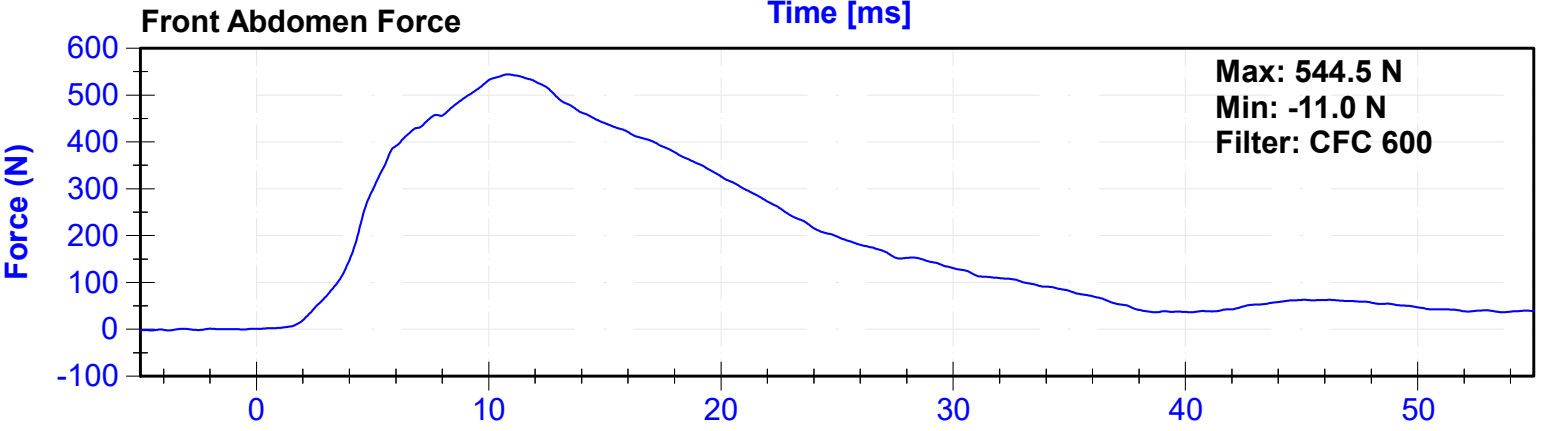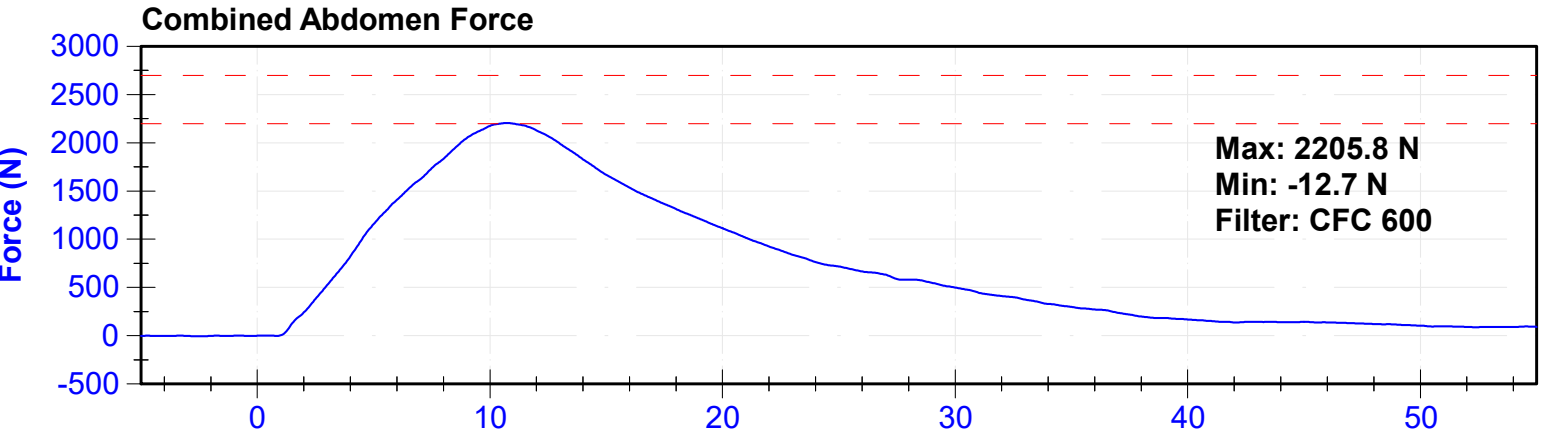


| | | | |
|-------------------|--------|-----------------------|------------|
| ATD Manufacturer | Denton | Test Technician | D. Sakona |
| ATD Serial Number | D037 | Laboratory Supervisor | C. Mantell |

Results



| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|------------------------------------|-----------------------------|-----------------------------|------|-----------------------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.0 | Pass |
| Humidity | 10 | 70 | % | 25.8 | Pass |
| Velocity | 5.95 | 6.15 | m/s | 6.052 | Pass |
| Lateral Spine Rotation | 45 | 55 | deg | 45.4 | Pass |
| Time at Maximum Rotation | 39 | 53 | ms | 42.8 | Pass |
| Time of Decay to Zero Degrees | 37 | 57 | ms | 38.5 | Pass |
| Pendulum Velocity Overall Corridor | Lower Boundary ¹ | Upper Boundary ² | m/s | See Plot ³ | Pass |


Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|----------------------------|--------------|---------------|------------------|----------------------|
| Pendulum Accelerometer | Endevco | C16650 | 10/31/2022 | 4/29/2023 |
| Pendulum "A" Potentiometer | Sfernice | 094 | 10/5/2022 | 10/5/2023 |
| Condyle "B" Potentiometer | Sfernice | 095 | 10/5/2022 | 10/5/2023 |

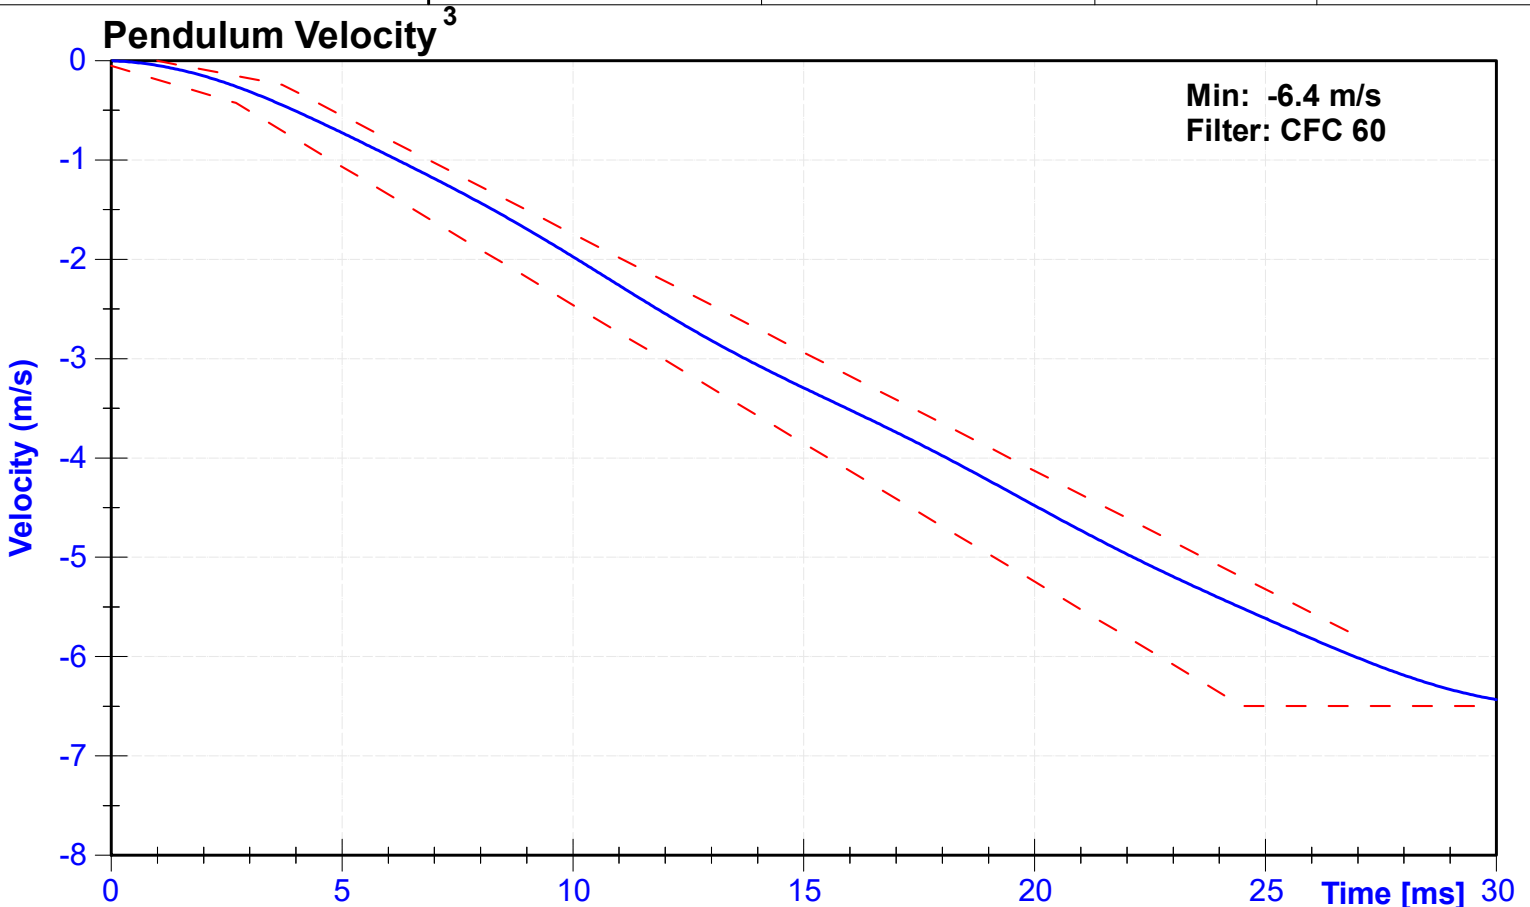

^{1,2} Upper and lower boundaries specified in Appendix I V-41

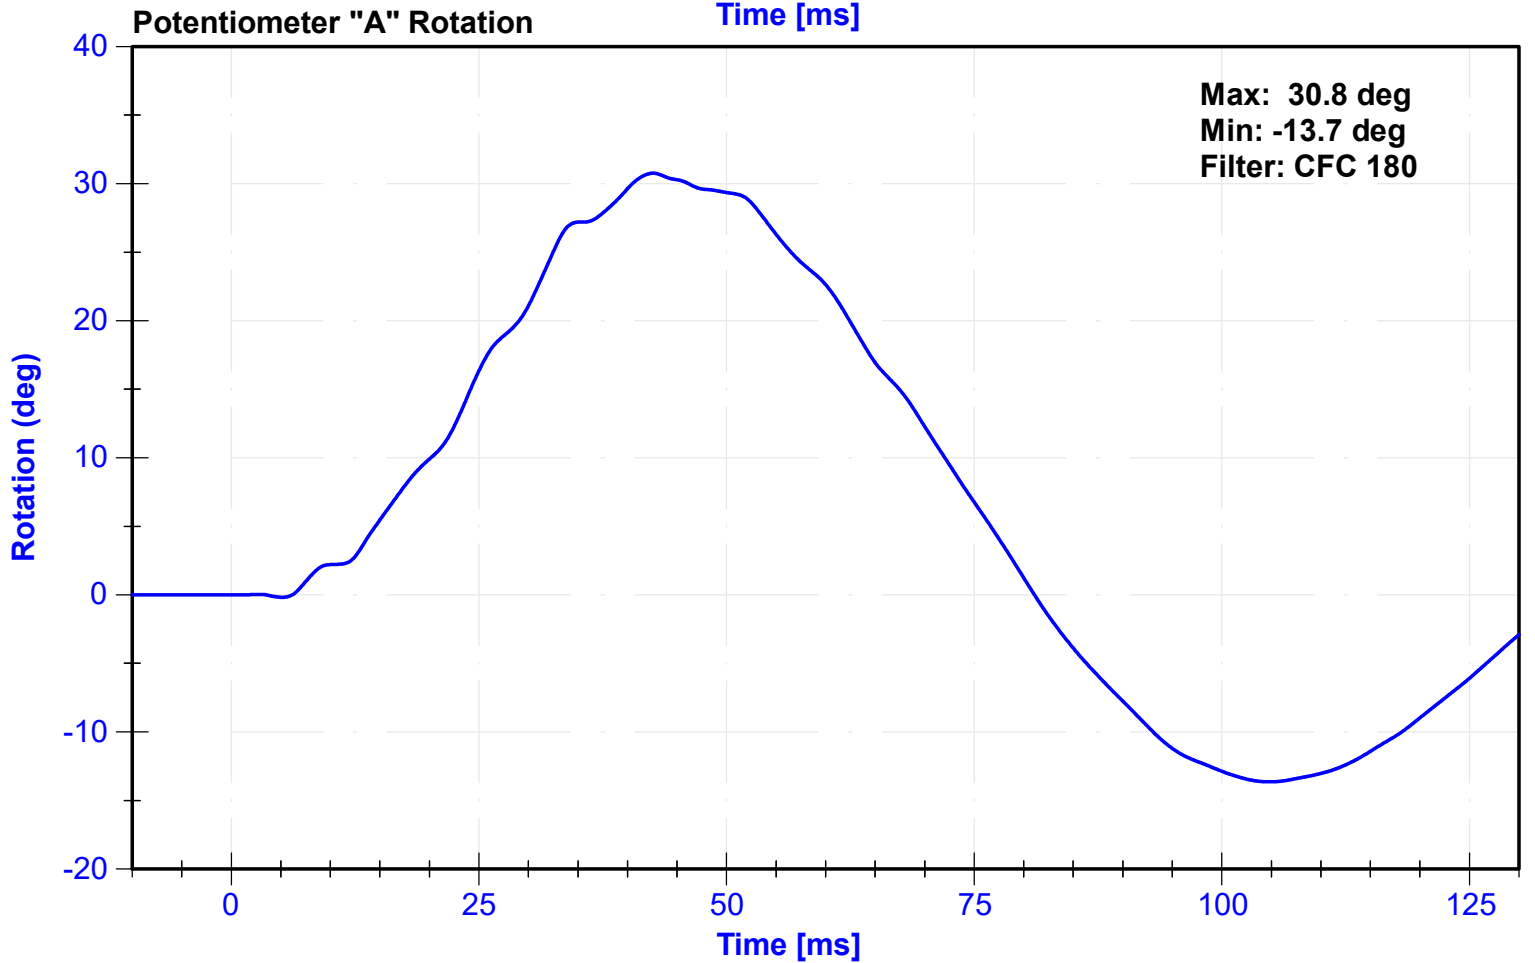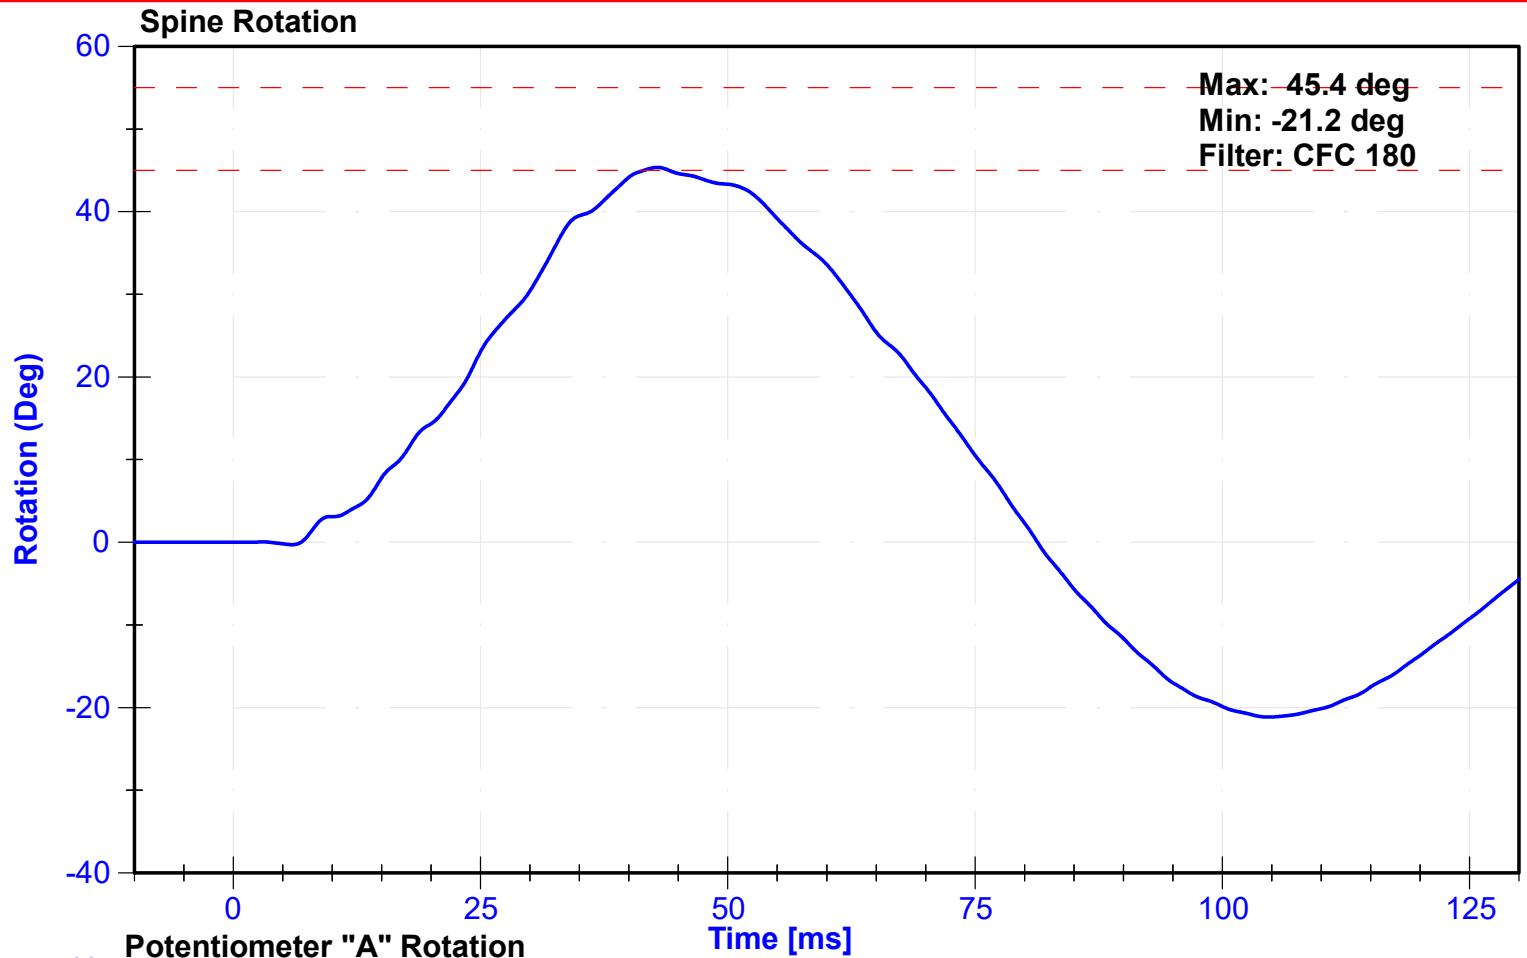

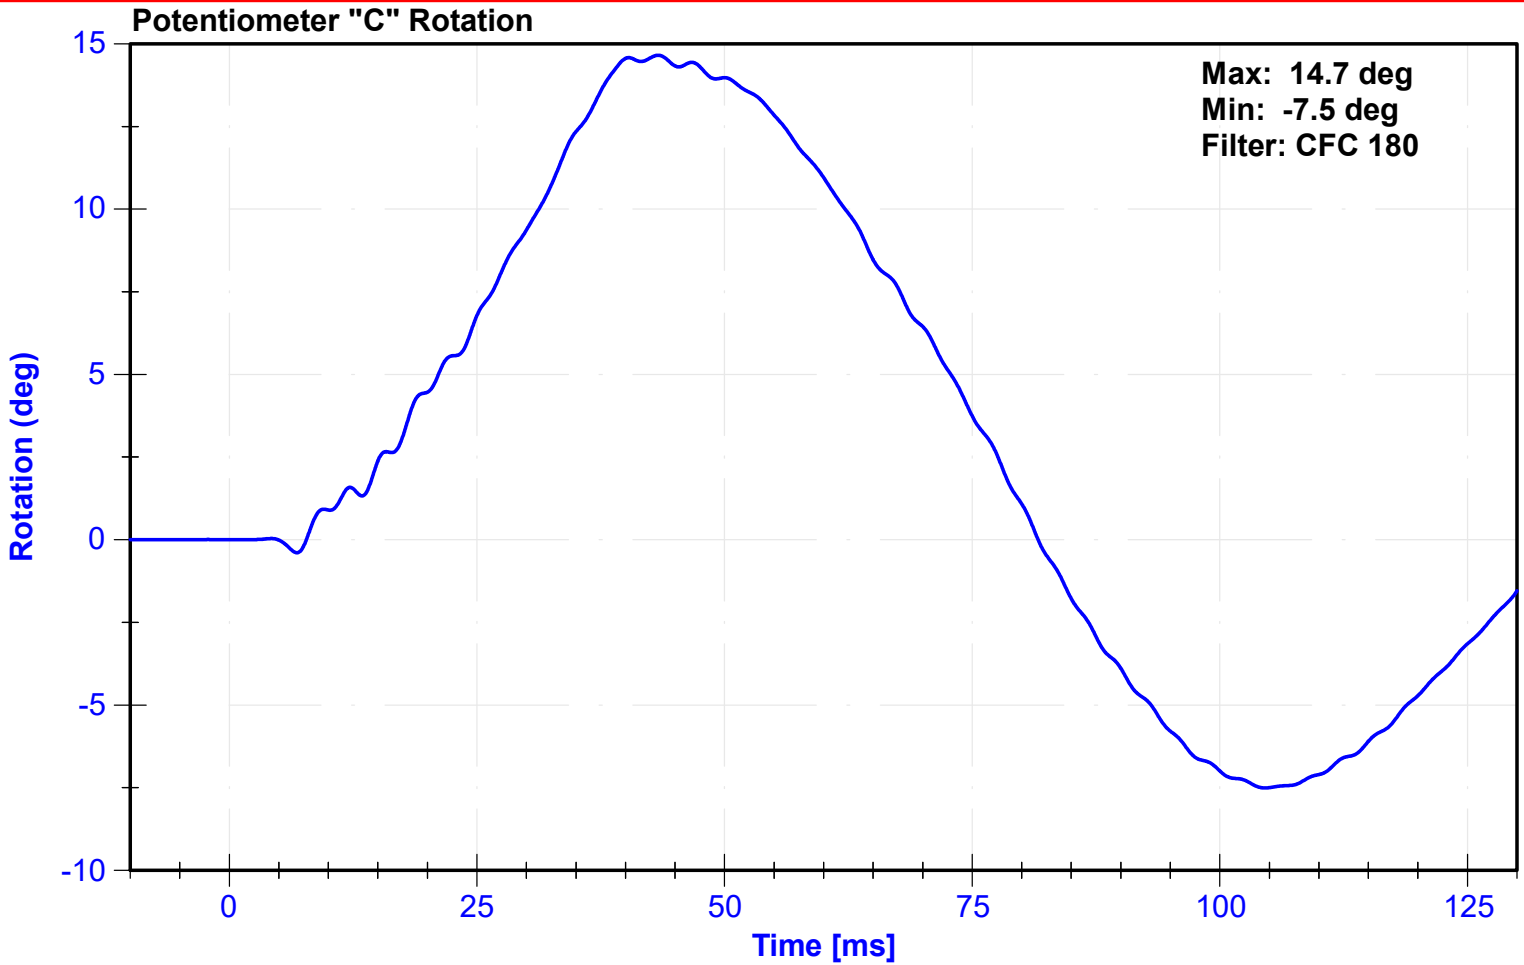

Appendix I

| ² Upper Boundary Corridor | | ¹ Lower Boundary Corridor | |
|--------------------------------------|----------------|--------------------------------------|----------------|
| Time (ms) | Velocity (m/s) | Time (ms) | Velocity (m/s) |
| 1.0 | 0.00 | 0.0 | -0.05 |
| 3.7 | -0.24 | 2.7 | -0.425 |
| 27.0 | -5.80 | 24.5 | -6.5 |
| | | 30.0 | -6.5 |


| | | | |
|-------------------|--------|-----------------------|--------------|
| ATD Manufacturer | Denton | Test Technician | Z. Schneider |
| ATD Serial Number | D037 | Laboratory Supervisor | C. Mantell |

Results


| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|------------------------------|-----------------------|-----------------------|------|---------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21 | Pass |
| Humidity | 10 | 70 | % | 30 | Pass |
| Velocity | 4.2 | 4.4 | m/s | 4.28 | Pass |
| Resistive Force | 4700 | 5400 | N | 4825.9 | Pass |
| Time at Peak Resistive Force | 11.8 | 16.1 | ms | 15.65 | Pass |
| Pubic Force | -1590 | -1230 | N | -1477.1 | Pass |
| Time at Peak Pubic Force | 12.2 | 17.0 | ms | 16.05 | Pass |

Transducer Calibrations


| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|------------------------|--------------|----------------|------------------|----------------------|
| Pendulum Accelerometer | Endevco | P51736 | 10/25/2022 | 4/23/2023 |
| Pubic Load Cell | Denton | 3096JFL-456-FY | 8/12/2022 | 8/12/2023 |

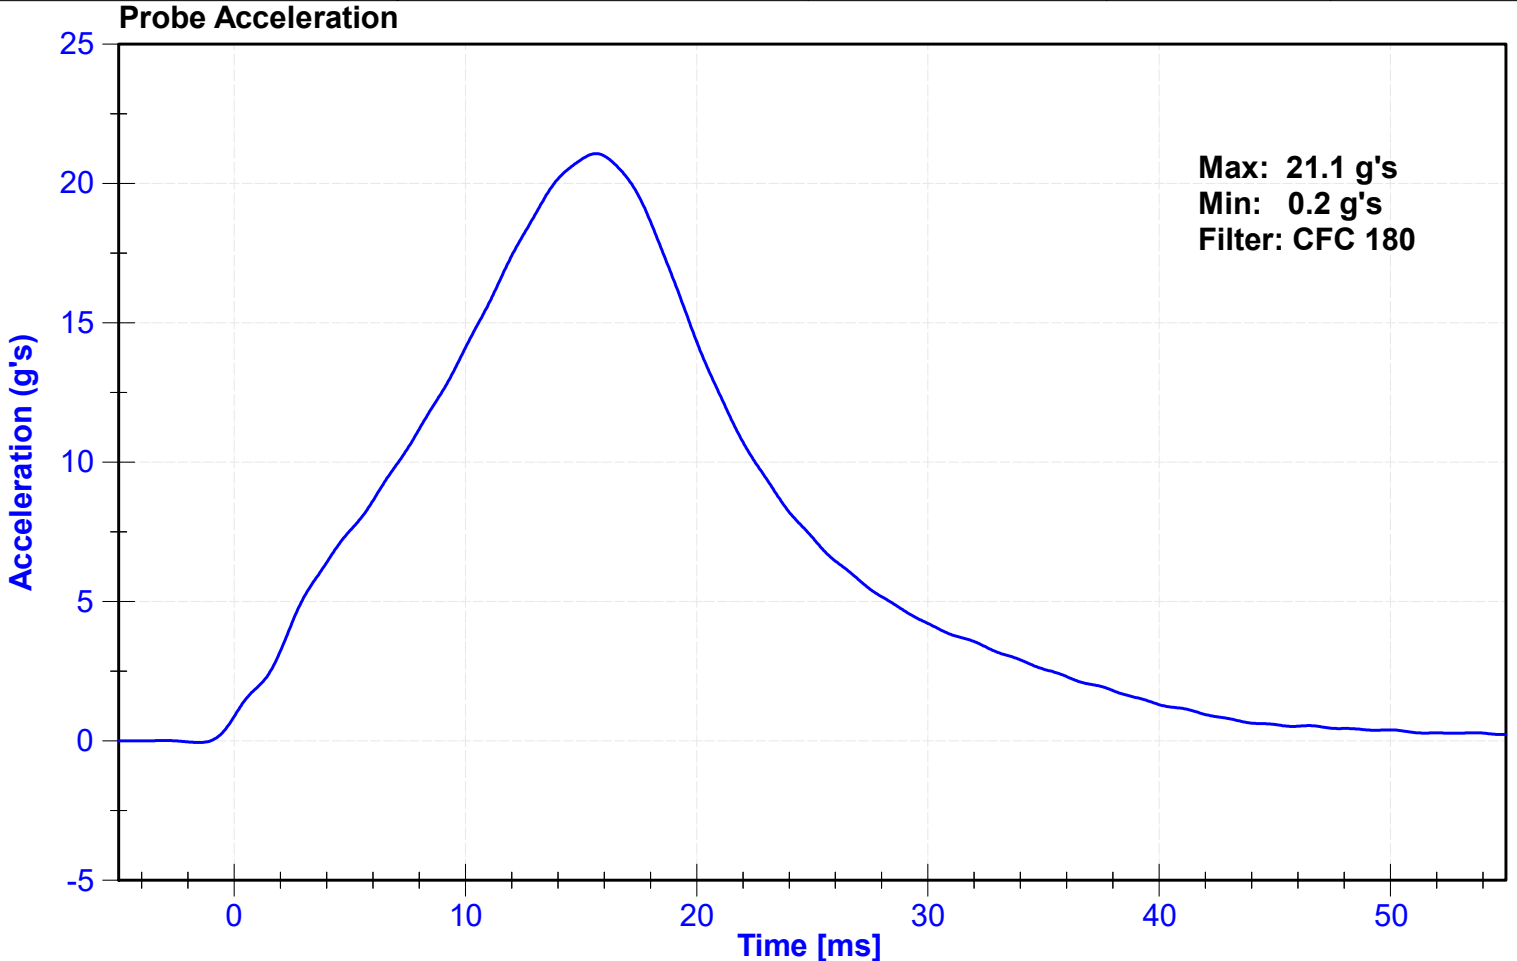

Resistive Force

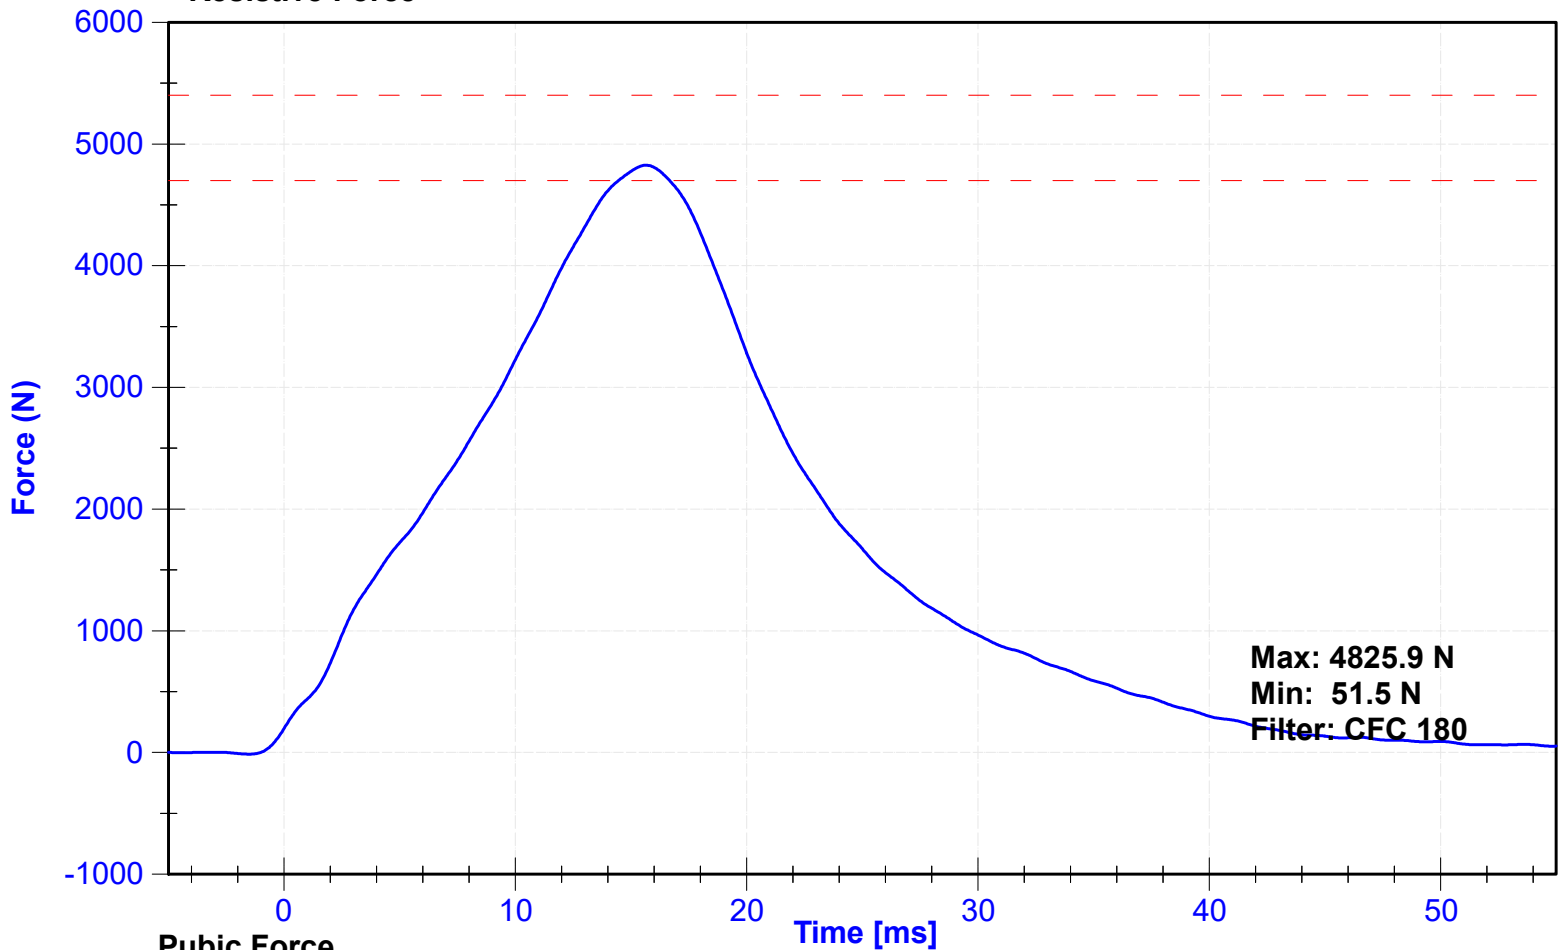

Pubic Force

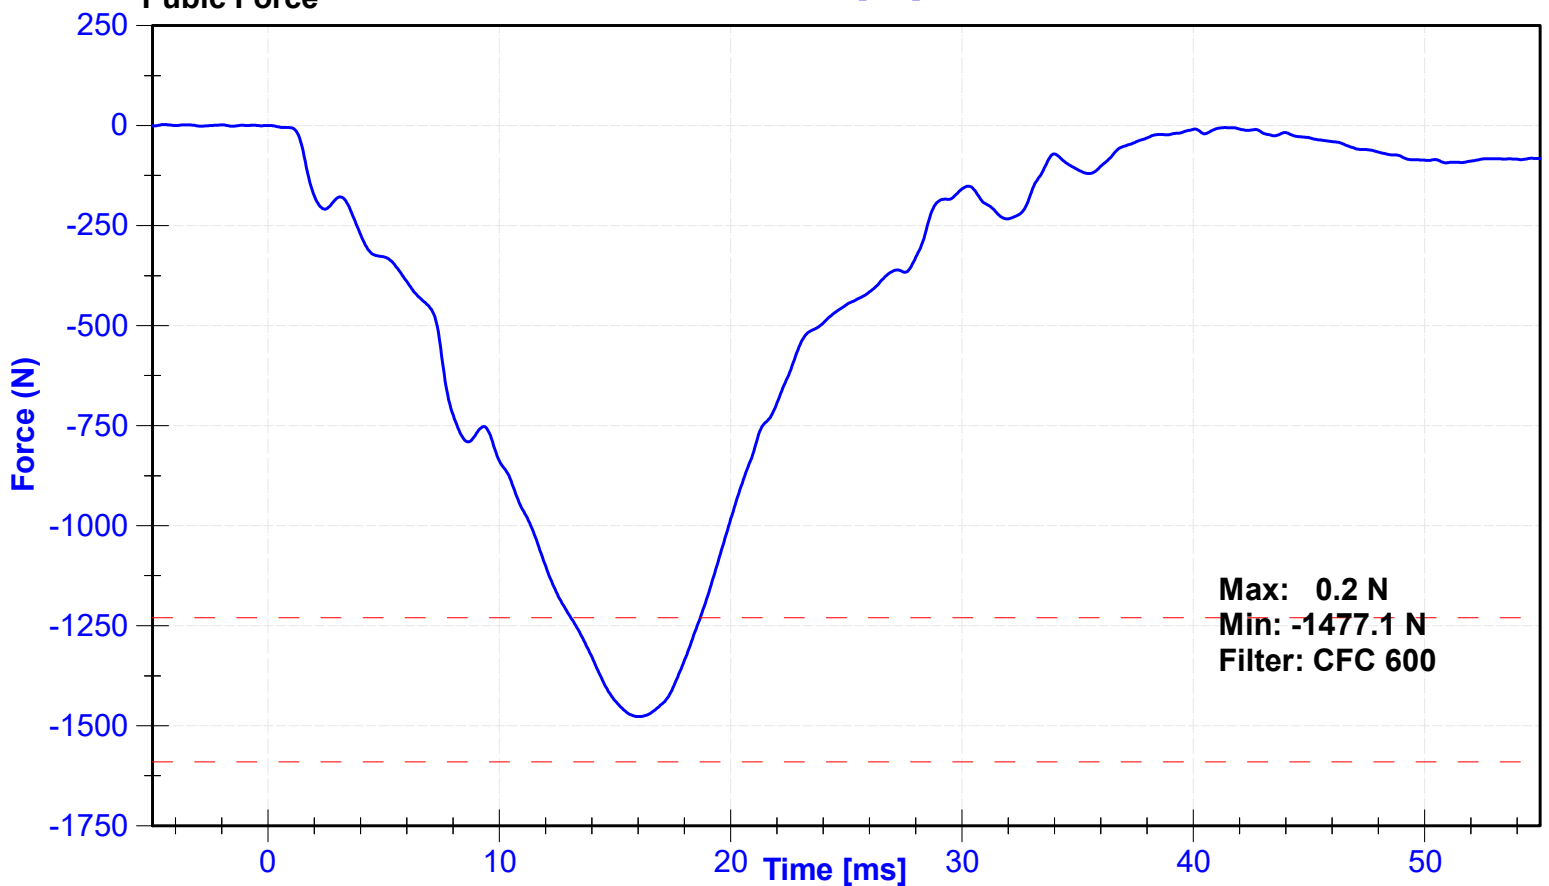

APPENDIX VI
SID-Its PERFORMANCE CALIBRATION TEST DATA

**PRE-TEST
SID-IIs PERFORMANCE CALIBRATION TEST DATA**





External Measurements - SID-IIs

Technician: K. Brogan

Date: 11/21/2022

Dummy Serial Number: 261

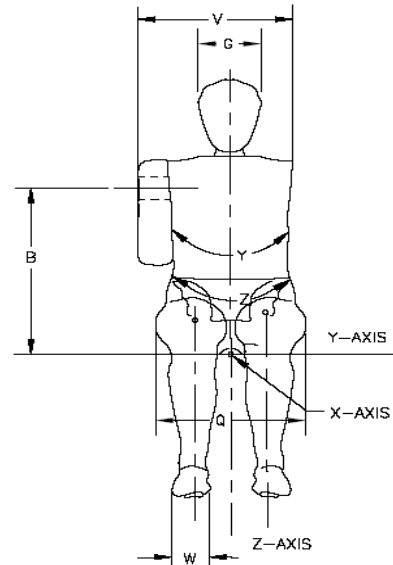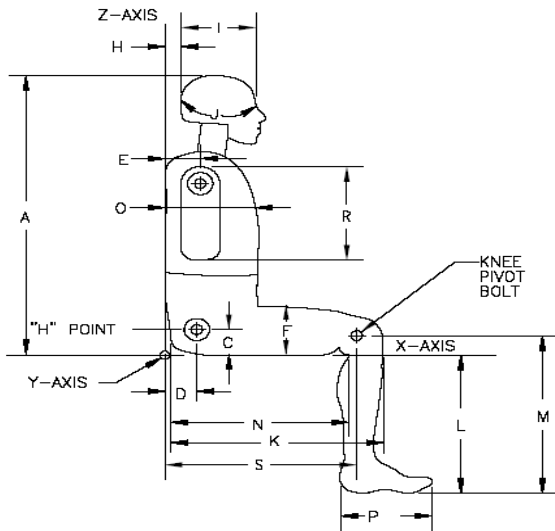

| Symbol | Description | Specification (mm) | | Result (mm) | Pass/Fail |
|--------|------------------------------|--------------------|-----|-------------|-----------|
| A | Sitting Height | 772 | 788 | 785 | Pass |
| B | Shoulder Pivot Height | 437 | 453 | 445 | Pass |
| C | H-point Height | 79 | 89 | 84 | Pass |
| D | H-point from seatback | 141 | 151 | 145 | Pass |
| E | Shoulder Pivot from Backline | 97 | 107 | 103 | Pass |
| F | Thigh Clearance | 119 | 135 | 129 | Pass |
| G | Head Breadth | 140 | 148 | 145 | Pass |
| H | Head Back from Backline | 40 | 46 | 43 | Pass |
| I | Head Depth | 178 | 188 | 181 | Pass |
| J | Head Circumference | 541 | 551 | 547 | Pass |
| K | Buttock to Knee Length | 514 | 540 | 531 | Pass |
| L | Popliteal Height | 343 | 369 | 358 | Pass |
| M | Knee Pivot to floor height | 392 | 409 | 401 | Pass |
| N | Buttock Popliteal Length | 416 | 442 | 433 | Pass |
| O | Chest Depth w/o jacket | 195 | 211 | 206 | Pass |
| P | Foot Length | 216 | 232 | 223 | Pass |
| Q | Hip Breadth (w/pelvic plugs) | 313 | 323 | 318 | Pass |
| R | Arm Length | 249 | 259 | 254 | Pass |
| S | Knee Joint to seatback | 477 | 493 | 485 | Pass |
| V | Shoulder Width | 341 | 357 | 351 | Pass |
| W | Foot Width | 78 | 94 | 84 | Pass |
| Y | Chest Circumference w/jacket | 851 | 881 | 873 | Pass |
| Z | Waist Circumference | 761 | 791 | 775 | Pass |

| | | | |
|-------------------|------------|-----------------------|------------|
| ATD Manufacturer | Humanetics | Test Technician | D. Kroll |
| ATD Serial Number | 261 | Laboratory Supervisor | C. Mantell |


Results




| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|------------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.1 | Pass |
| Humidity | 10 | 70 | % | 48 | Pass |
| Resultant Acceleration | 115 | 137 | g's | 134.2 | Pass |
| Oscillation | 0 | 15 | % | 3.3 | Pass |
| Fore-Aft Acceleration | -15 | 15 | g's | 4.7 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibratio Date | Calibratio Due Date |
|-----------------|--------------|---------------|-----------------|---------------------|
| X Accelerometer | Endevco | P68067 | 10/26/2022 | 4/24/2023 |
| Y Accelerometer | Endevco | P18567 | 10/25/2022 | 4/23/2023 |
| Z Accelerometer | Endevco | T26086 | 10/25/2022 | 4/23/2023 |

Resultant Acceleration

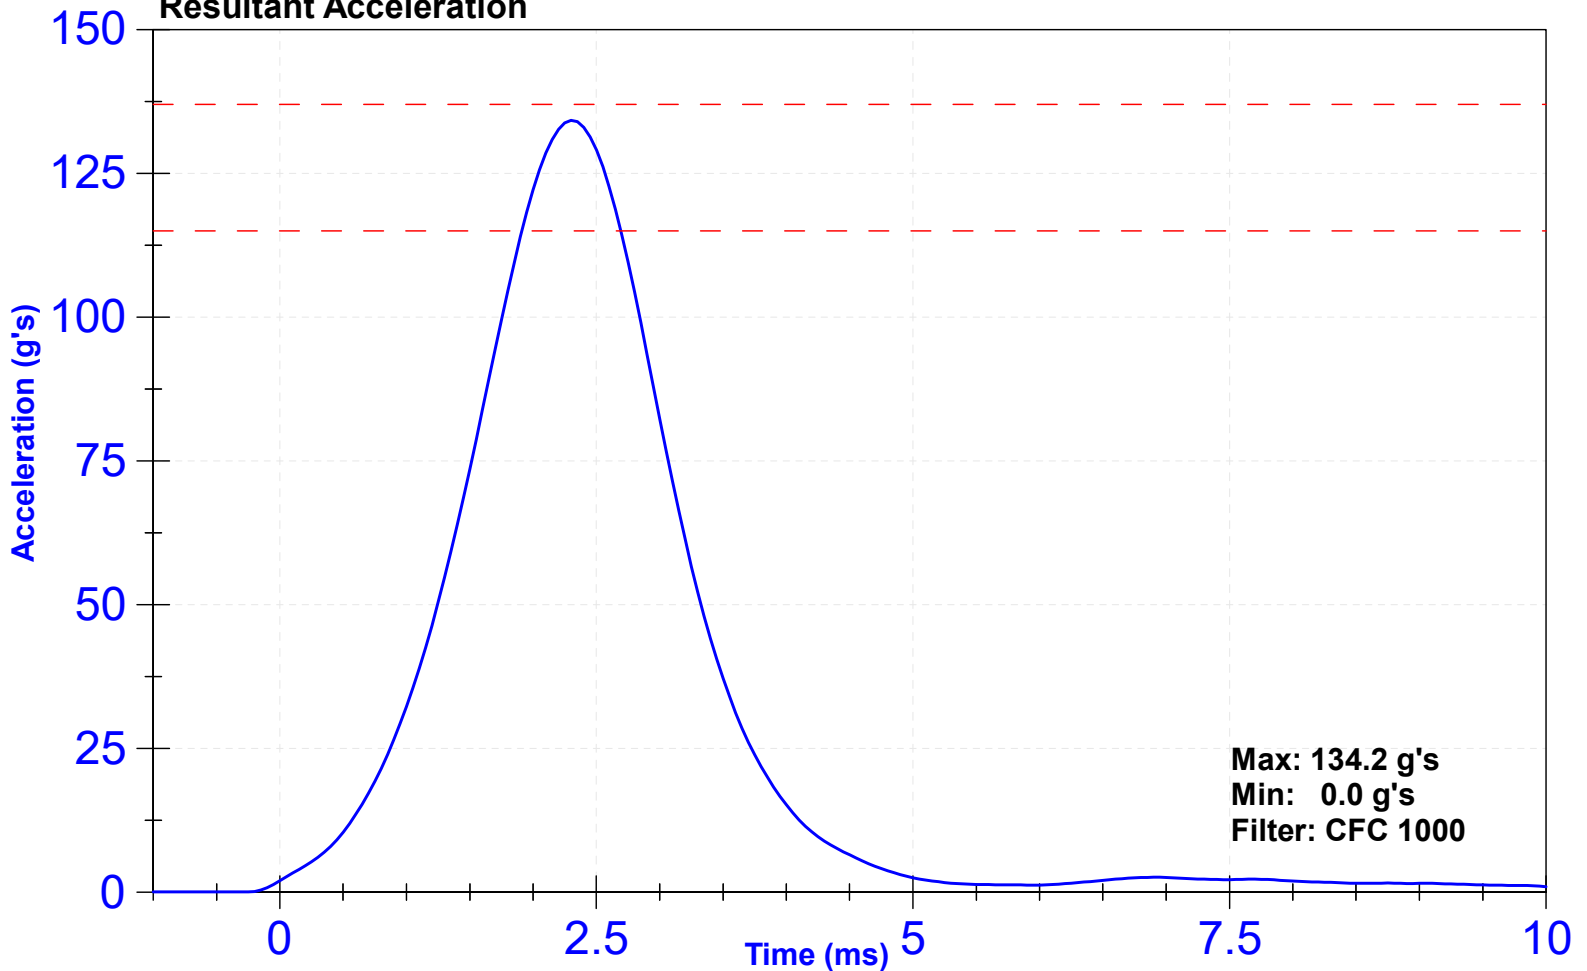

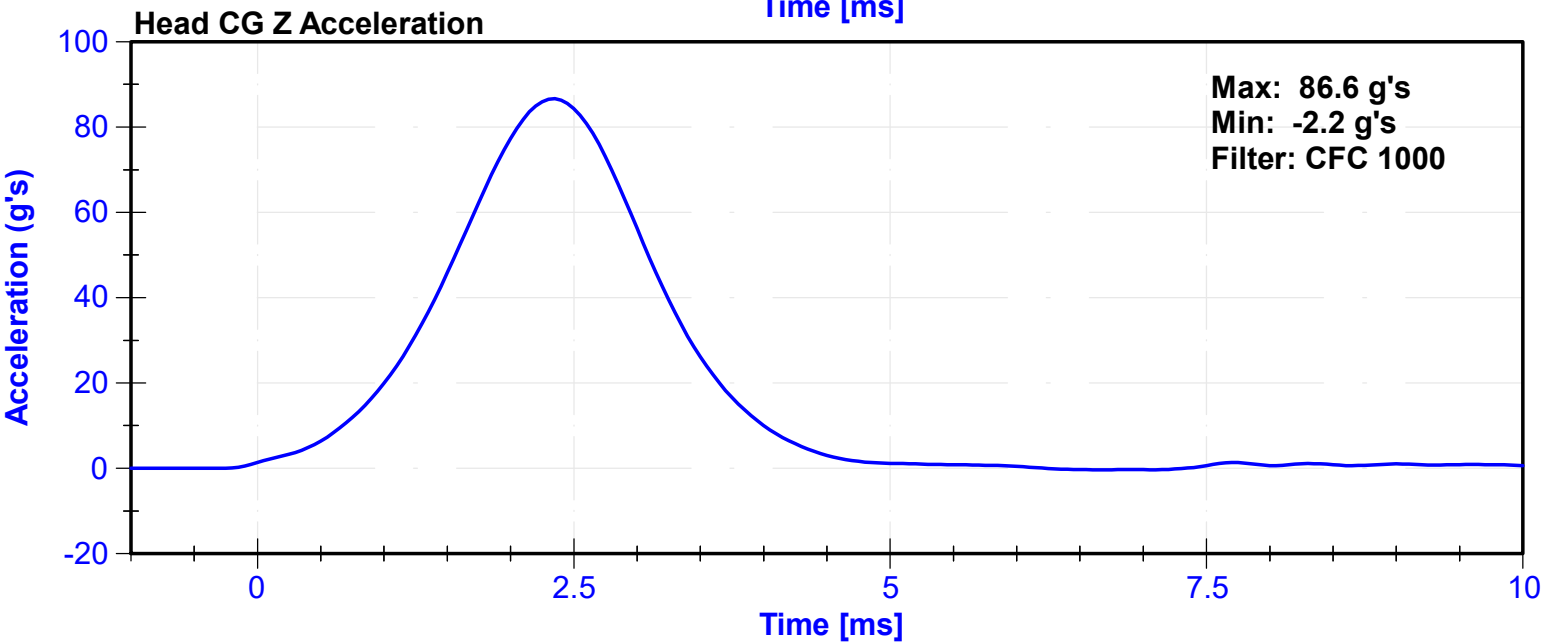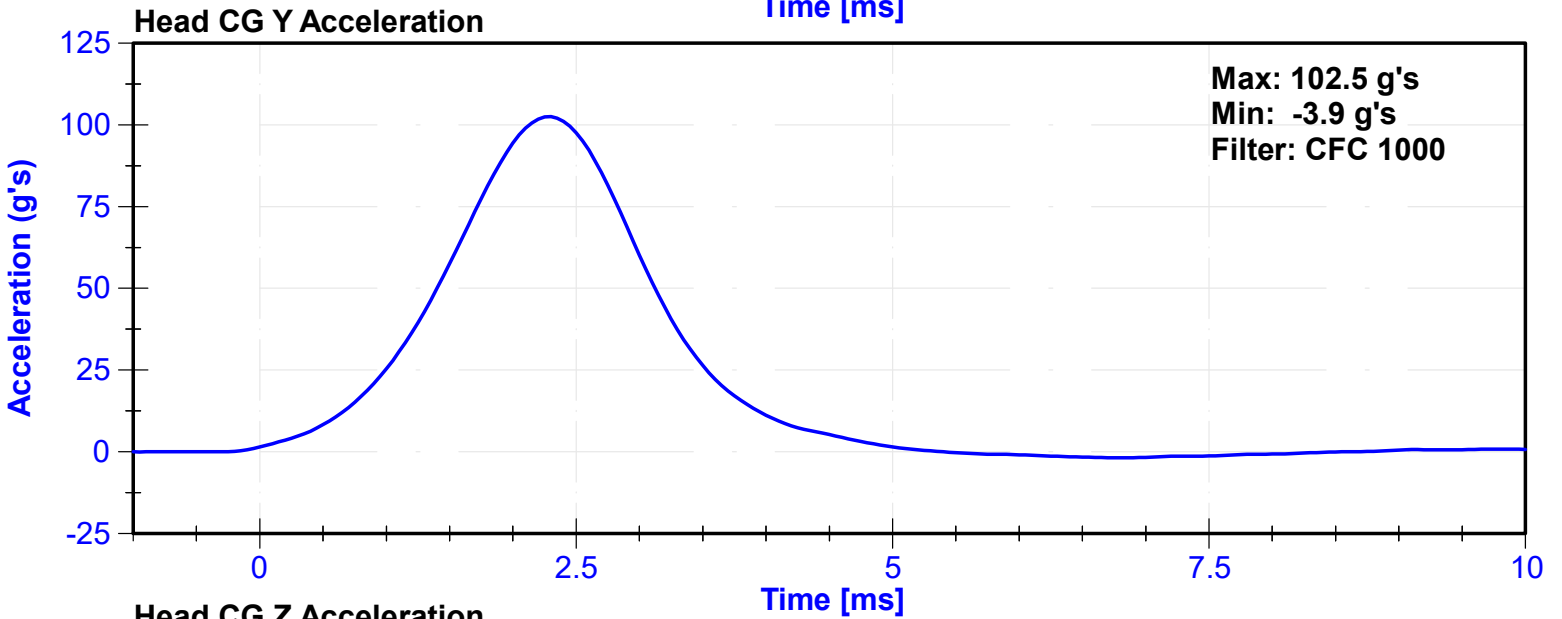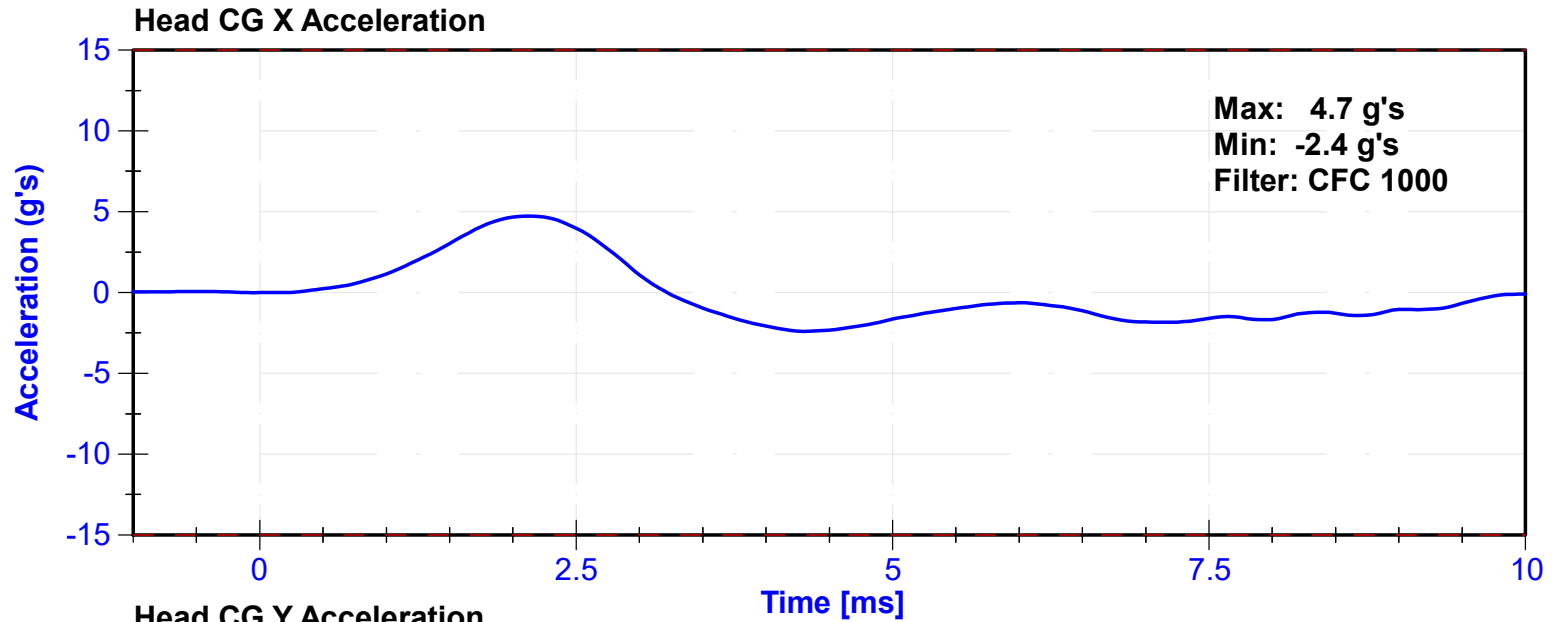


| | | | |
|-------------------|------|-----------------------|------------|
| ATD Manufacturer | FTSS | Test Technician | D. Sakona |
| ATD Serial Number | 261 | Laboratory Supervisor | C. Mantell |



Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|-----------------------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.3 | Pass |
| Humidity | 10 | 70 | % | 51.1 | Pass |
| Velocity | 5.51 | 5.63 | m/s | 5.537 | Pass |
| Pendulum Impulse at 10ms | 2.2 | 2.8 | m/s | 2.31 | Pass |
| Pendulum Impulse at 15ms | 3.3 | 4.1 | m/s | 3.53 | Pass |
| Pendulum Impulse at 20ms | 4.4 | 5.4 | m/s | 4.79 | Pass |
| Pendulum Impulse at 25ms | 5.4 | 6.1 | m/s | 5.73 | Pass |
| Pendulum Impulse from 25 to 100ms | 5.5 | 6.2 | m/s | 5.88 | Pass |
| Neck Rotation | 71 | 81 | deg | 71.5 | Pass |
| Time at Maximum Rotation | 50 | 70 | ms | 60.2 | Pass |
| Moment about the OC | 36 | 44 | Nm | 43.7 | Pass |
| Moment Decay to 0 Nm | 102 | 126 | ms | 112.0 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|------------------------|--------------|---------------|------------------|----------------------|
| Pendulum Accelerometer | Endevco | 7231C-750 | 10/26/2022 | 10/26/2023 |
| Pendulum Potentiometer | Servo | 4961 | 2/23/2022 | 2/23/2023 |
| Condyle Potentiometer | Servo | DS185 | 11/12/2021 | 11/12/2022 |
| Upper Neck Load Cell | Humanetics | 1716A_1872-FY | 6/13/2022 | 6/13/2023 |

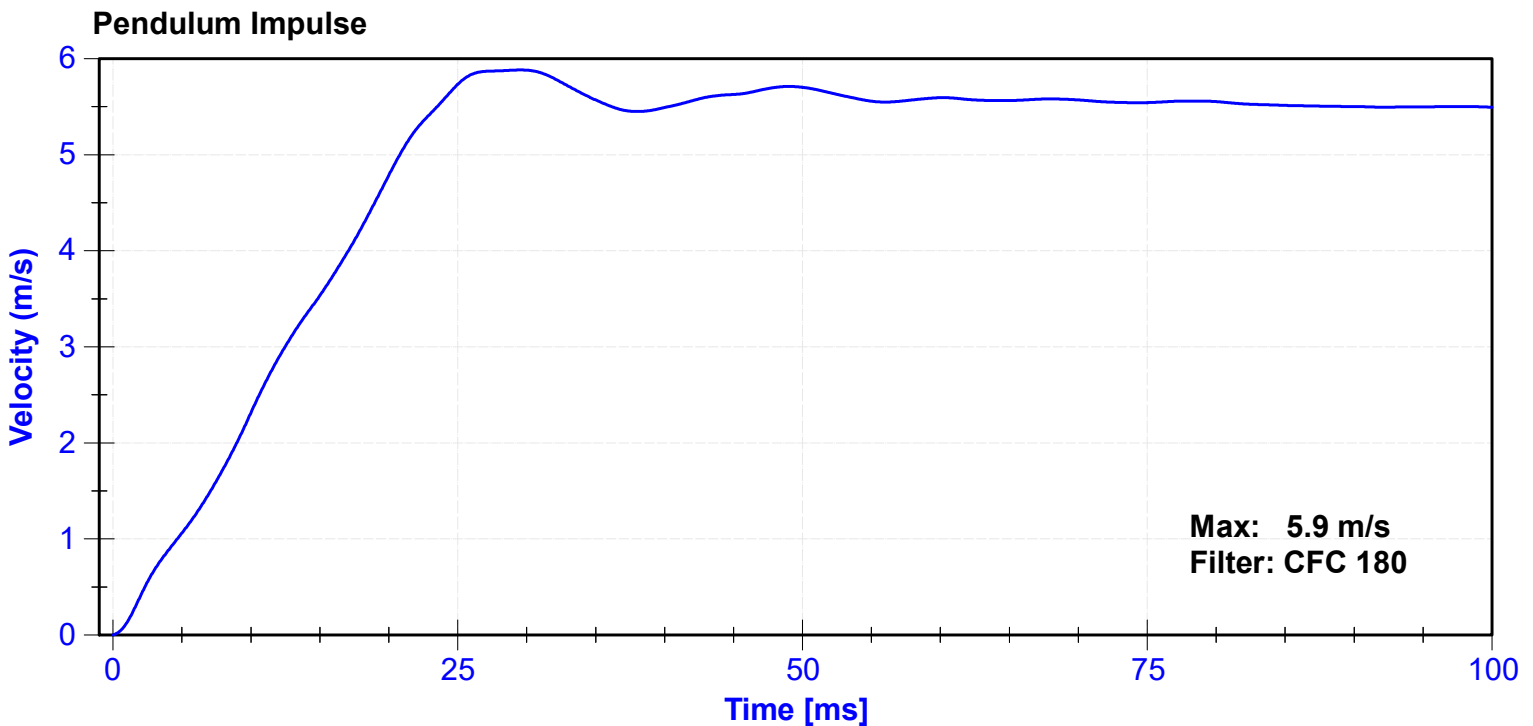

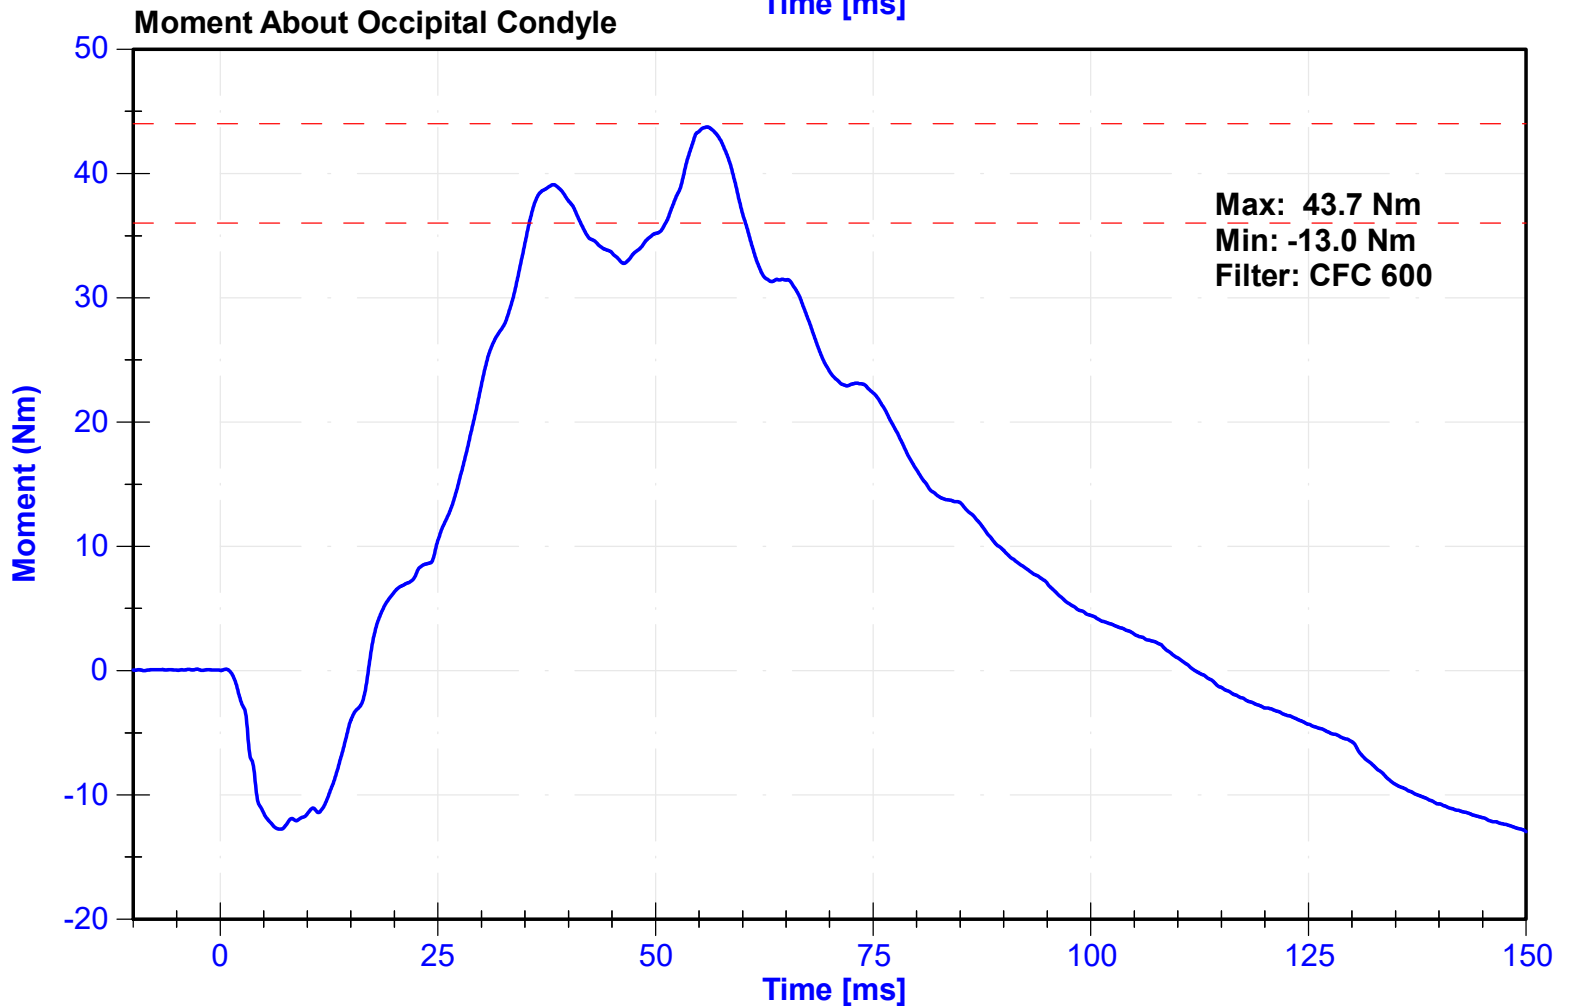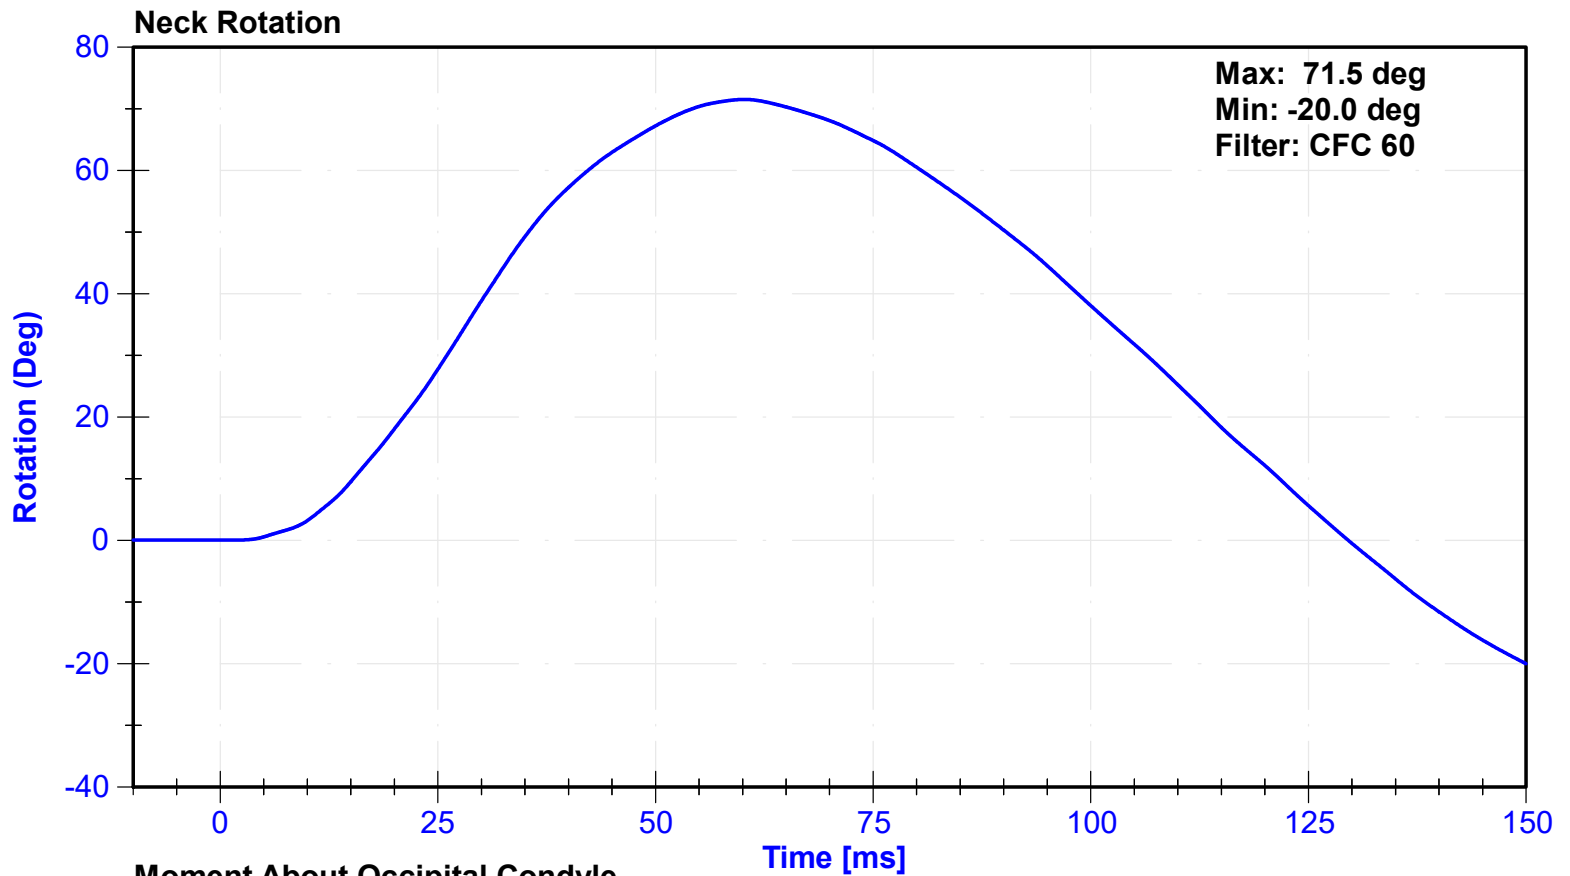

| | | | |
|-------------------|------|-----------------------|--------------|
| ATD Manufacturer | FTSS | Test Technician | Z. Schneider |
| ATD Serial Number | 261 | Laboratory Supervisor | K. Brogan |


Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|----------------------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.3 | Pass |
| Humidity | 10 | 70 | % | 27 | Pass |
| Velocity | 4.2 | 4.4 | m/s | 4.28 | Pass |
| Probe Acceleration | 13 | 18 | g's | 15.9 | Pass |
| Shoulder Deflection | 28 | 37 | mm | 31.8 | Pass |
| Lateral Upper Spine Acceleration | 17 | 22 | g's | 19.2 | Pass |


Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|-----------------------------|--------------|---------------|------------------|----------------------|
| Pendulum Accelerometer | Endevco | P51736 | 10/25/2022 | 4/23/2023 |
| Shoulder Potentiometer | Servo | 572GFE | 11/1/2022 | 5/2/2023 |
| Upper Spine Y Accelerometer | Endevco | P18688 | 10/25/2022 | 4/23/2023 |


Probe Acceleration

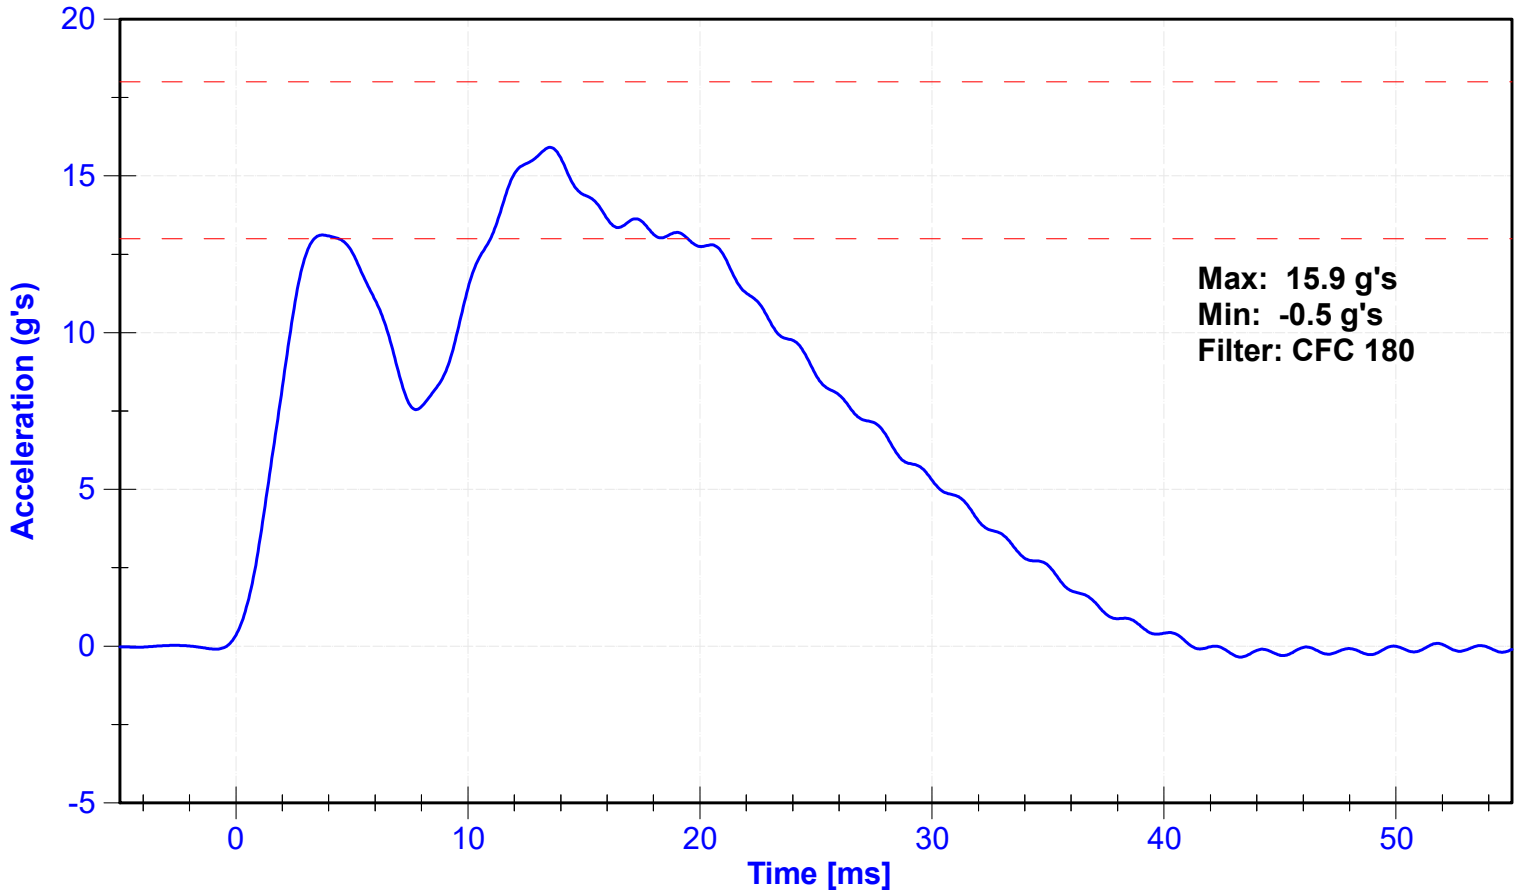

Shoulder Displacement

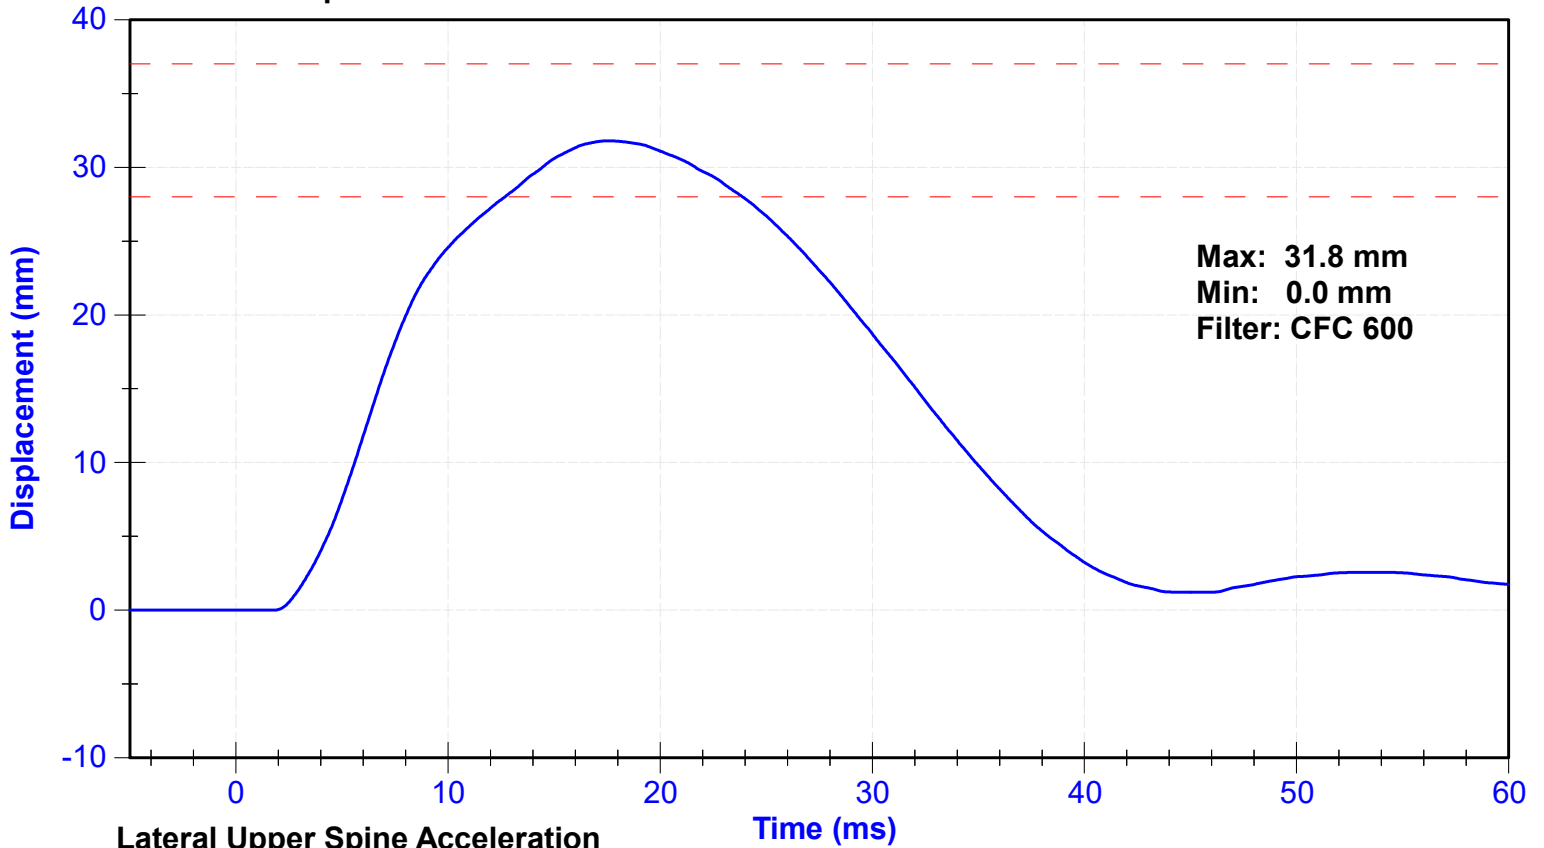

Lateral Upper Spine Acceleration

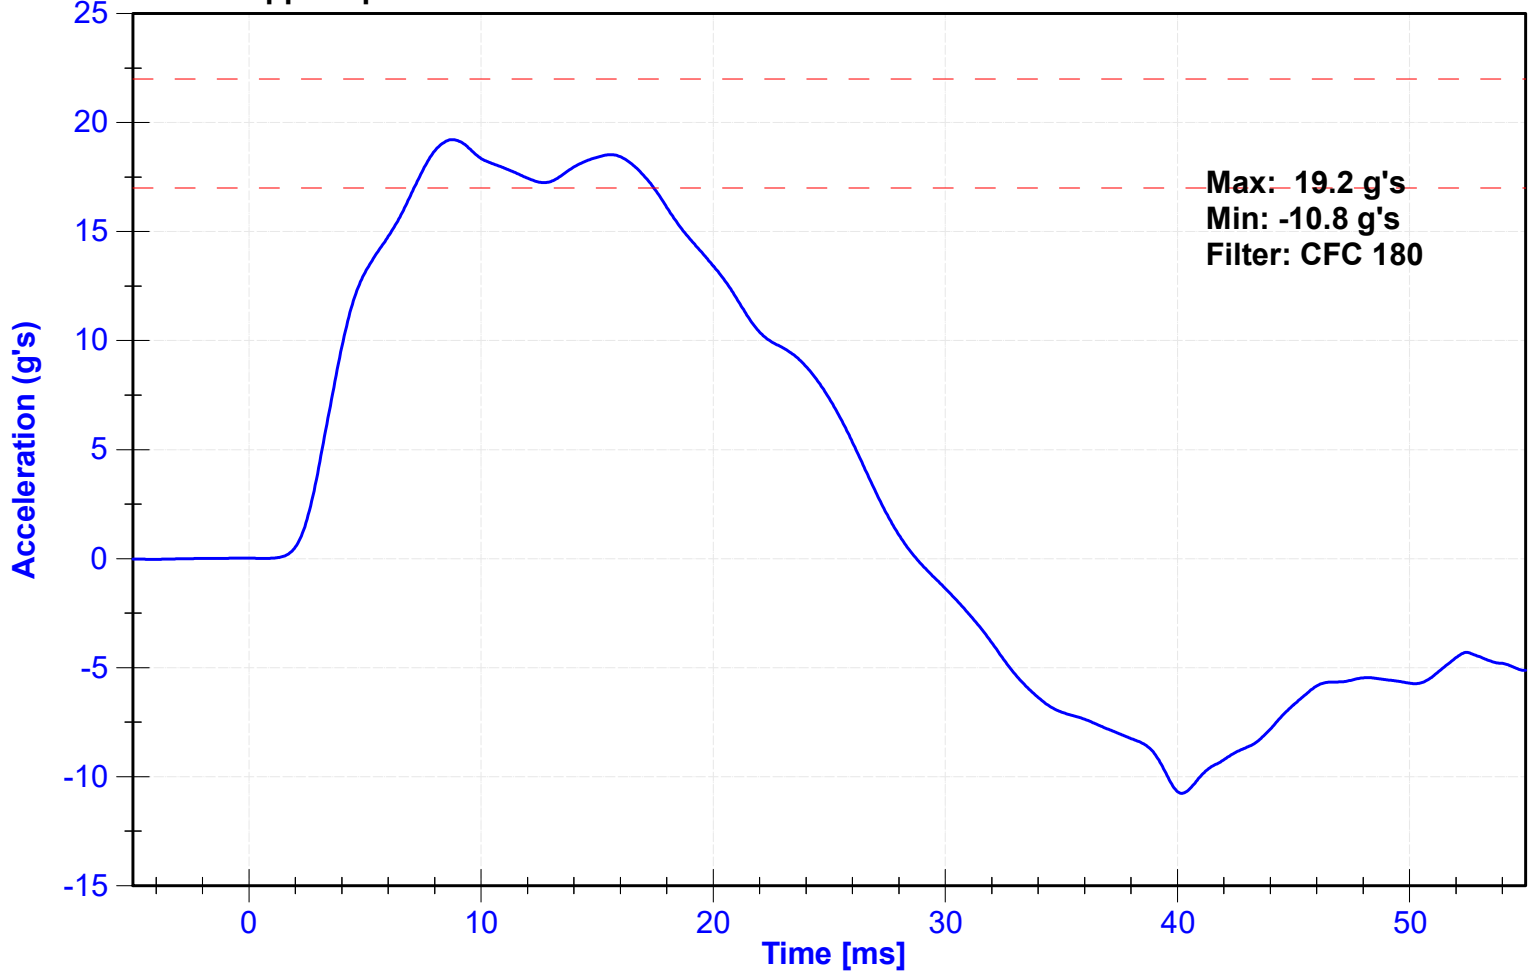


| | | | |
|-------------------|------------|-----------------------|--------------|
| ATD Manufacturer | Humanetics | Test Technician | Z. Schneider |
| ATD Serial Number | 261 | Laboratory Supervisor | K. Brogan |





Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|----------------------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 20.8 | Pass |
| Humidity | 10 | 70 | % | 20.3 | Pass |
| Velocity | 6.6 | 6.8 | m/s | 6.61 | Pass |
| Probe Acceleration after 5 ms | 30 | 36 | g's | 33.5 | Pass |
| Lateral Upper Spine Acceleration | 34 | 43 | g's | 40.0 | Pass |
| Lateral Lower Spine Acceleration | 29 | 37 | g's | 31.8 | Pass |
| Shoulder Deflection | 31 | 40 | mm | 35.7 | Pass |
| Upper Thorax Rib Deflection | 25 | 32 | mm | 27.5 | Pass |
| Mid Thorax Rib Deflection | 30 | 36 | mm | 30.5 | Pass |
| Lower Thorax Rib Deflection | 32 | 38 | mm | 33.7 | Pass |


Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------------------------------|--------------|---------------|------------------|----------------------|
| Pendulum Accelerometer | Endevco | P51736 | 10/25/2022 | 4/23/2023 |
| Upper Spine T1 Y Accelerometer | Endevco | P18688 | 10/25/2022 | 4/23/2023 |
| Upper Spine T12 Y Accelerometer | Endevco | P58744 | 10/25/2022 | 4/23/2023 |
| Shoulder Potentiometer | Servo | 572GFE | 11/1/2022 | 5/2/2023 |
| Upper Thorax Rib Potentiometer | Servo | 062GFE | 11/1/2022 | 5/2/2023 |
| Middle Thorax Rib Potentiometer | Servo | 528GFE | 11/1/2022 | 5/2/2023 |
| Lower Thorax Rib Potentiometer | Servo | 513GFE | 11/1/2022 | 5/2/2023 |

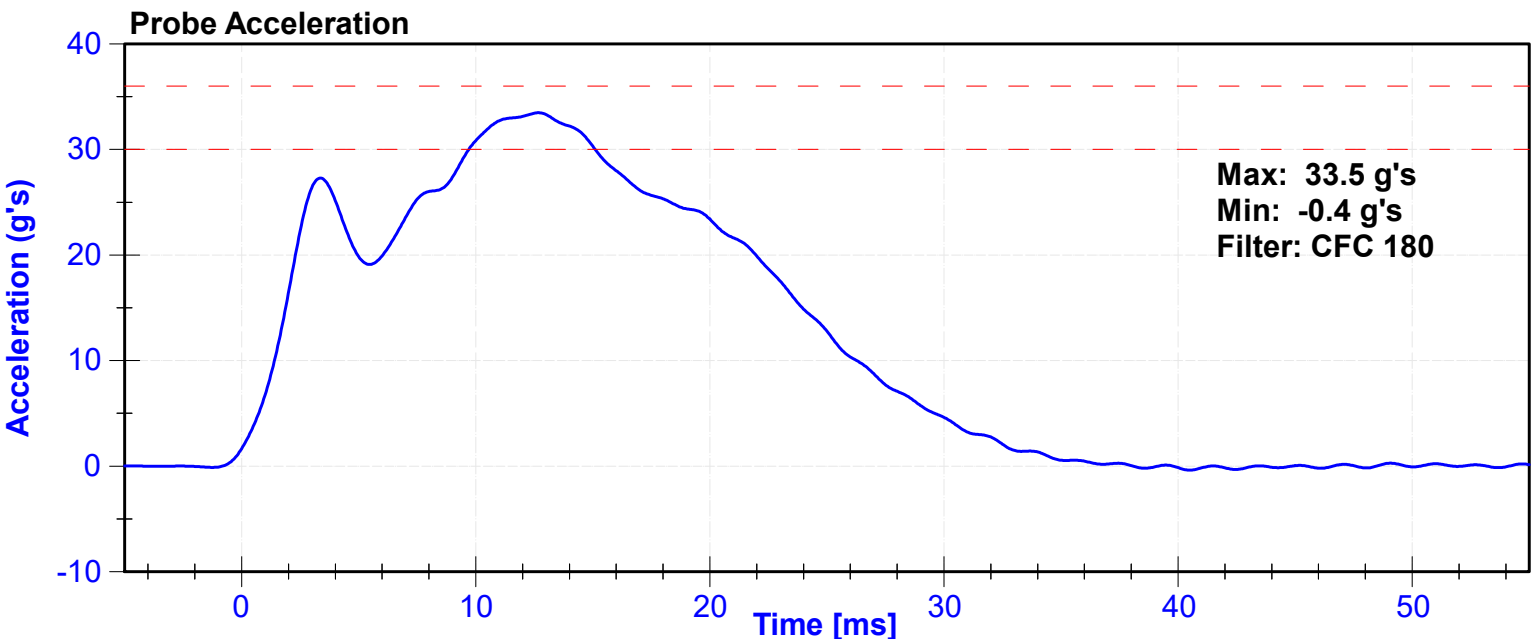


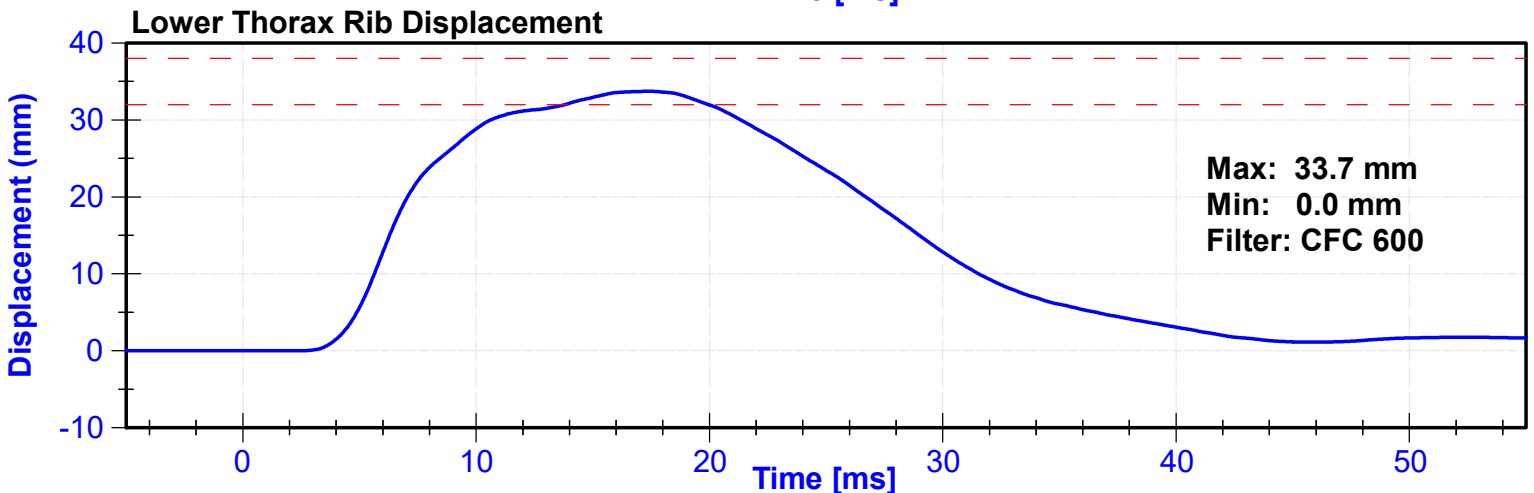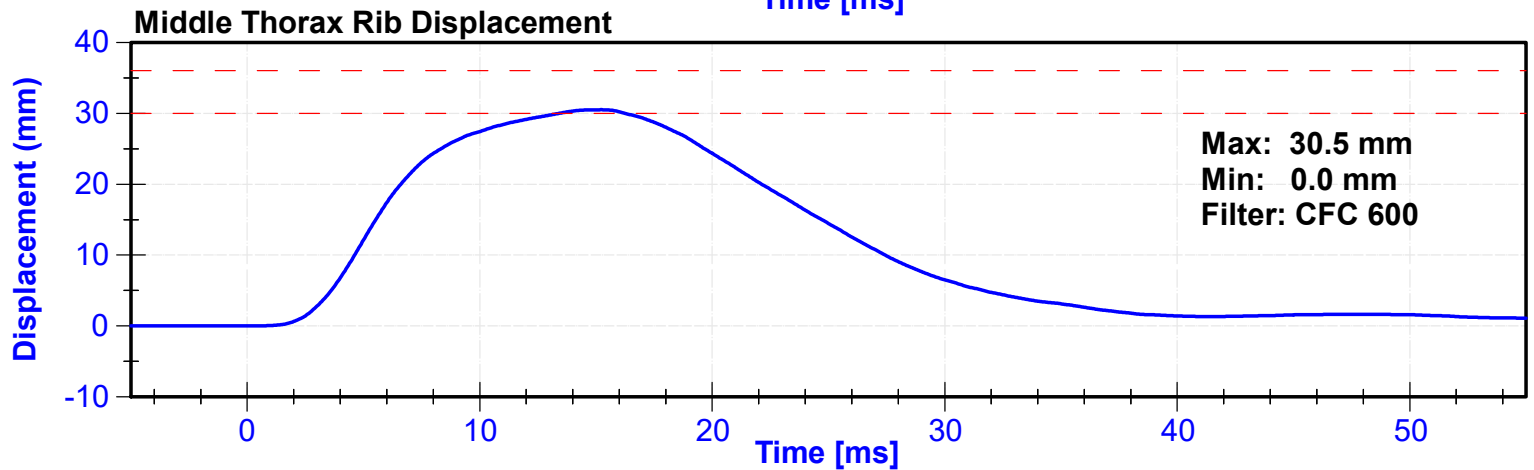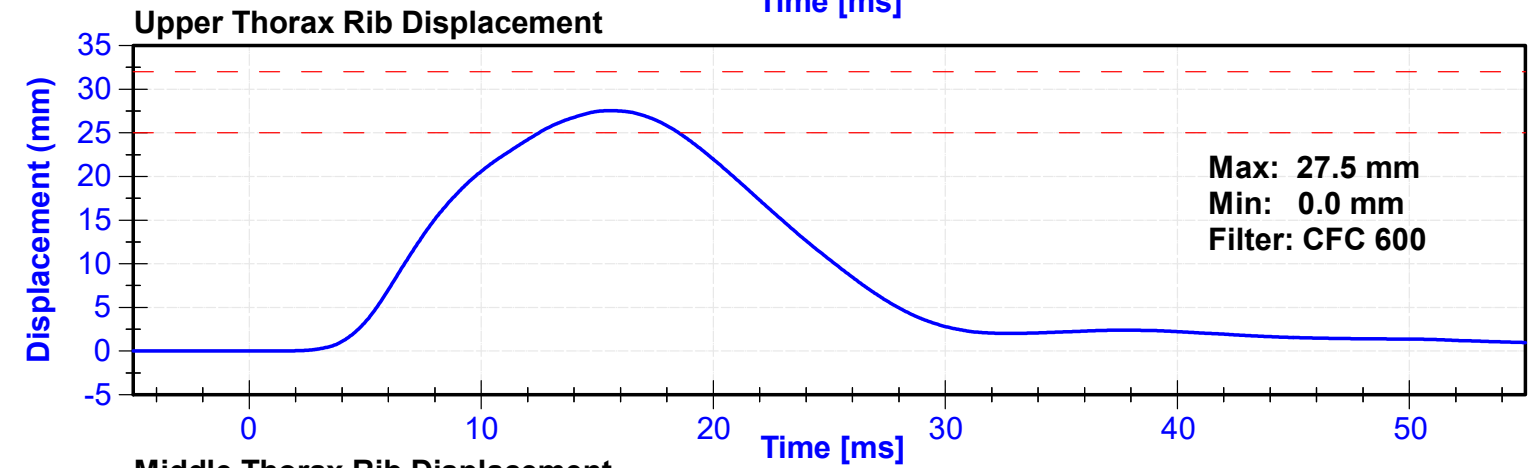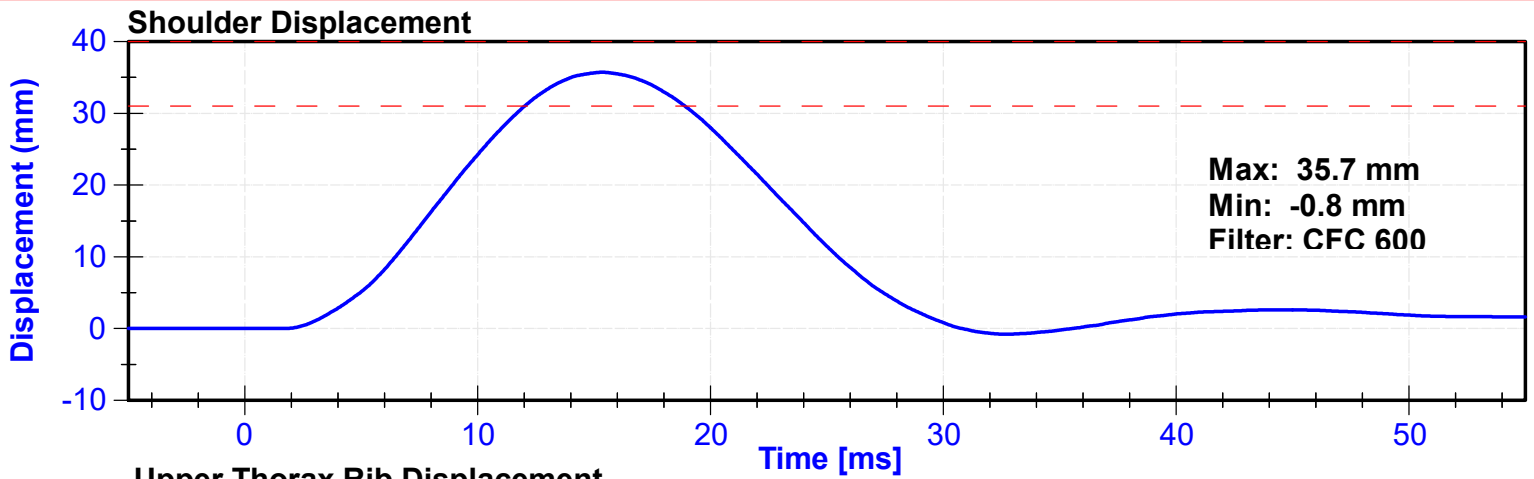

Lateral Upper Spine Acceleration

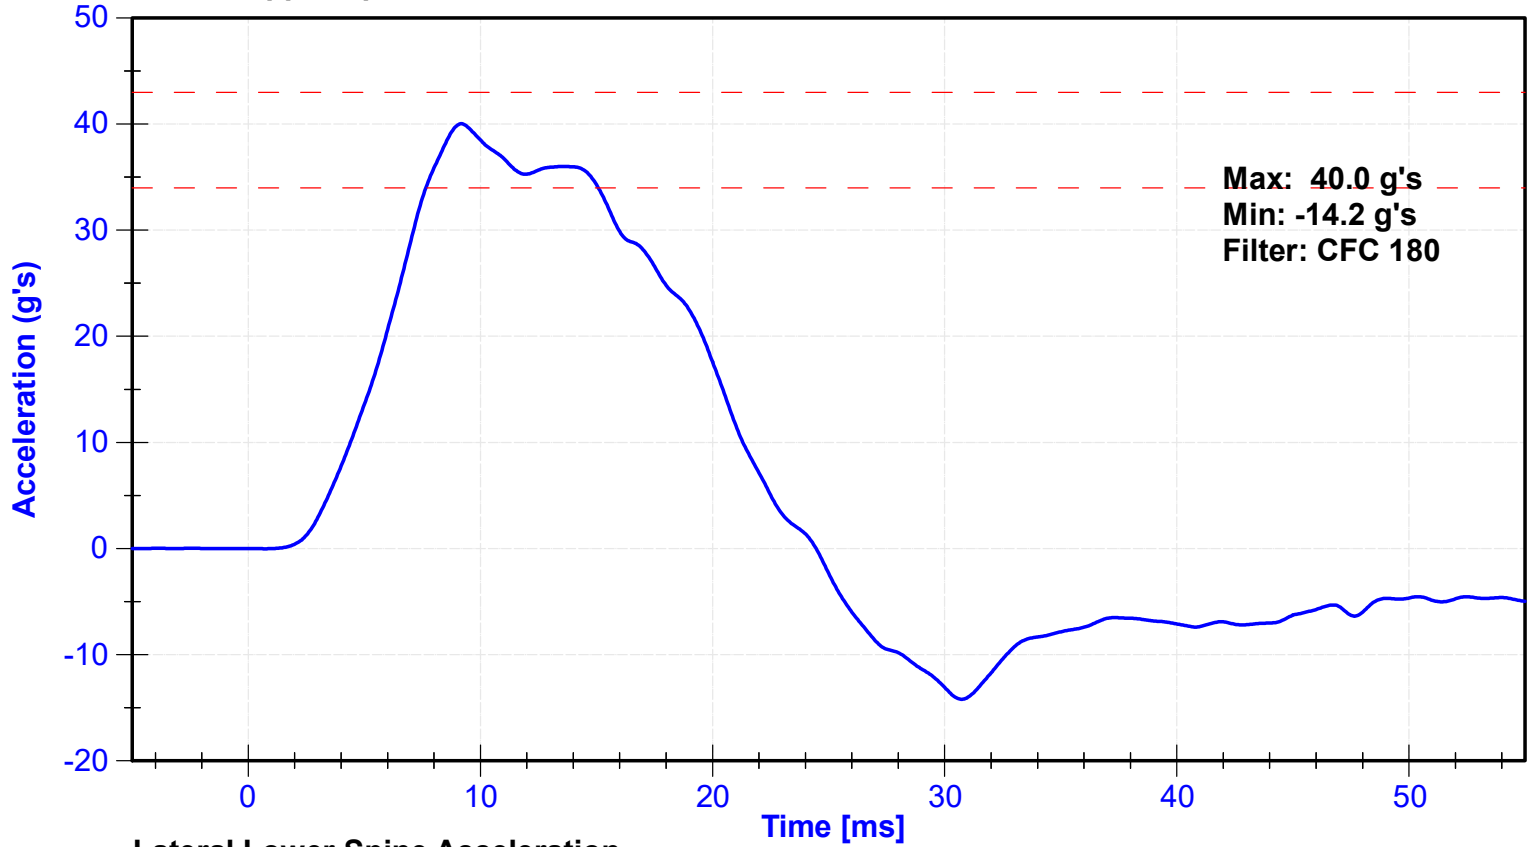

Lateral Lower Spine Acceleration

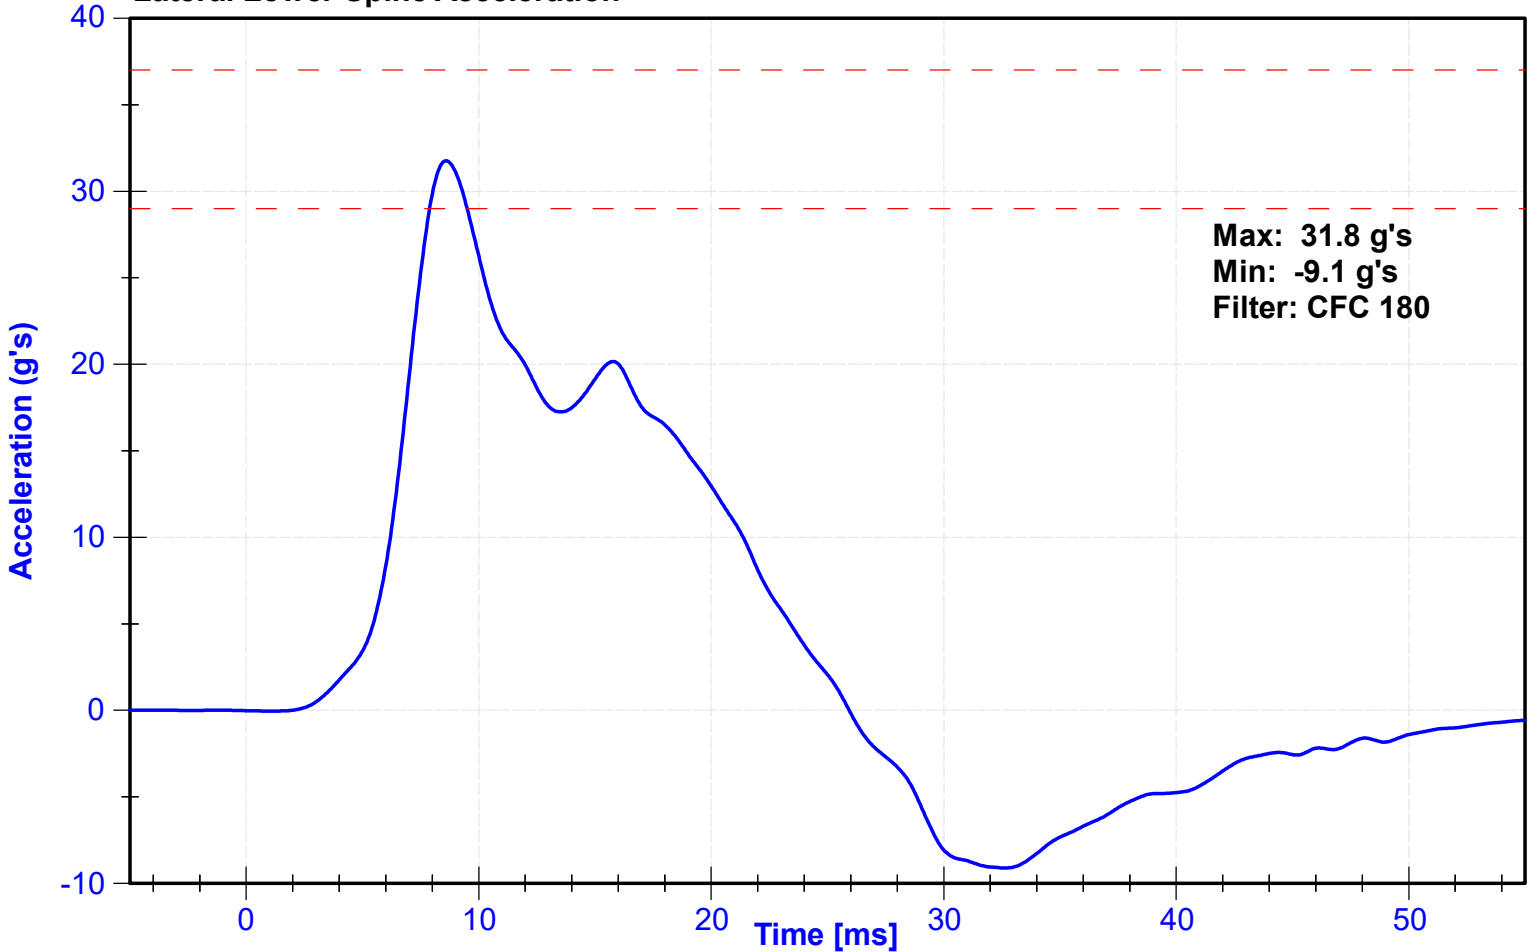


| | | | |
|-------------------|------|-----------------------|--------------|
| ATD Manufacturer | FTSS | Test Technician | Z. Schneider |
| ATD Serial Number | 261 | Laboratory Supervisor | K. Brogan |




Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|----------------------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.3 | Pass |
| Humidity | 10 | 70 | % | 20 | Pass |
| Velocity | 4.2 | 4.4 | m/s | 4.24 | Pass |
| Probe Acceleration | 14 | 18 | g's | 17.8 | Pass |
| Lateral Upper Spine Acceleration | 13 | 17 | g's | 16.7 | Pass |
| Lateral Lower Spine Acceleration | 7 | 11 | g's | 10.1 | Pass |
| Upper Thorax Rib Deflection | 32 | 40 | mm | 32.9 | Pass |
| Middle Thorax Rib Deflection | 39 | 45 | mm | 42.4 | Pass |
| Lower Thorax Rib Deflection | 35 | 43 | mm | 36.3 | Pass |


Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------------------------------|--------------|---------------|------------------|----------------------|
| Pendulum Accelerometer | Endevco | P51736 | 10/25/2022 | 4/23/2023 |
| Upper Spine Y Accelerometer | Endevco | P18688 | 10/25/2022 | 4/23/2023 |
| Lower Spine Y Accelerometer | Endevco | P58744 | 10/25/2022 | 4/23/2023 |
| Upper Thorax Rib Potentiometer | Servo | 062GFE | 11/1/2022 | 5/2/2023 |
| Middle Thorax Rib Potentiometer | Servo | 528GFE | 11/1/2022 | 5/2/2023 |
| Lower Thorax Rib Potentiometer | Servo | 513GFE | 11/1/2022 | 5/2/2023 |

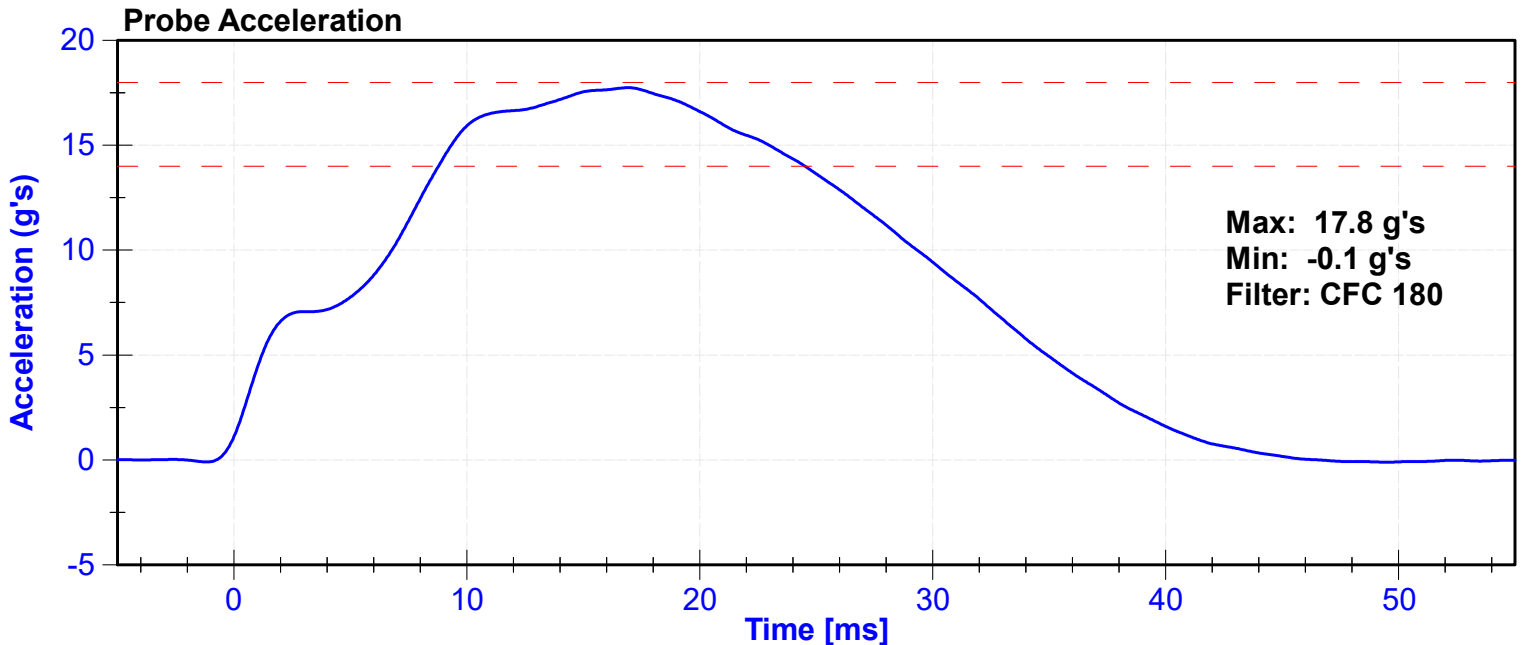


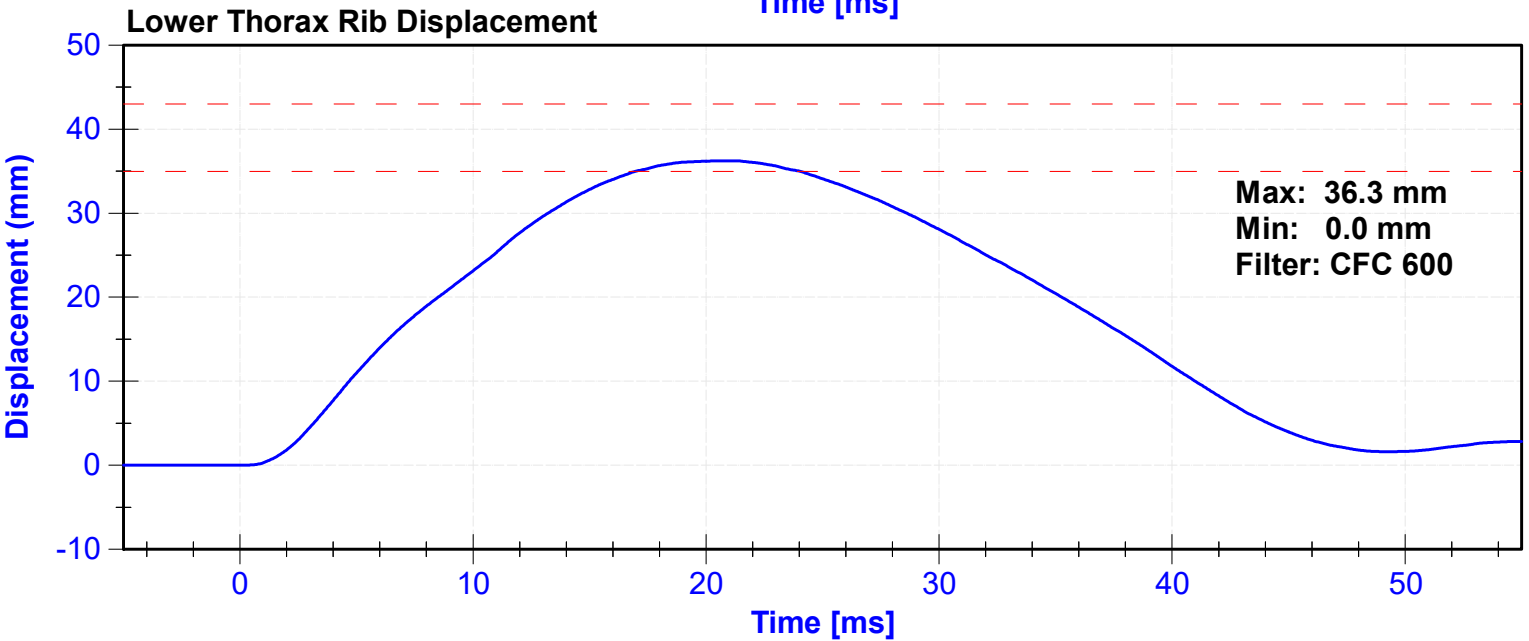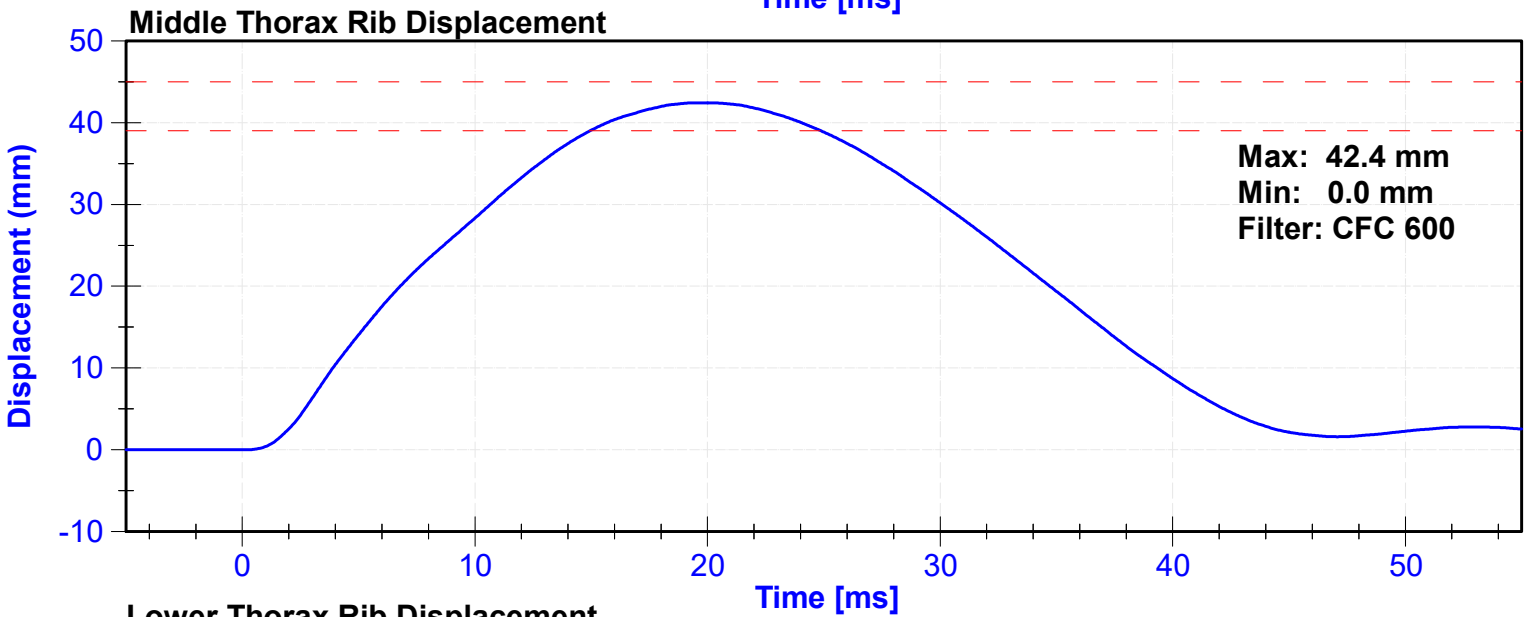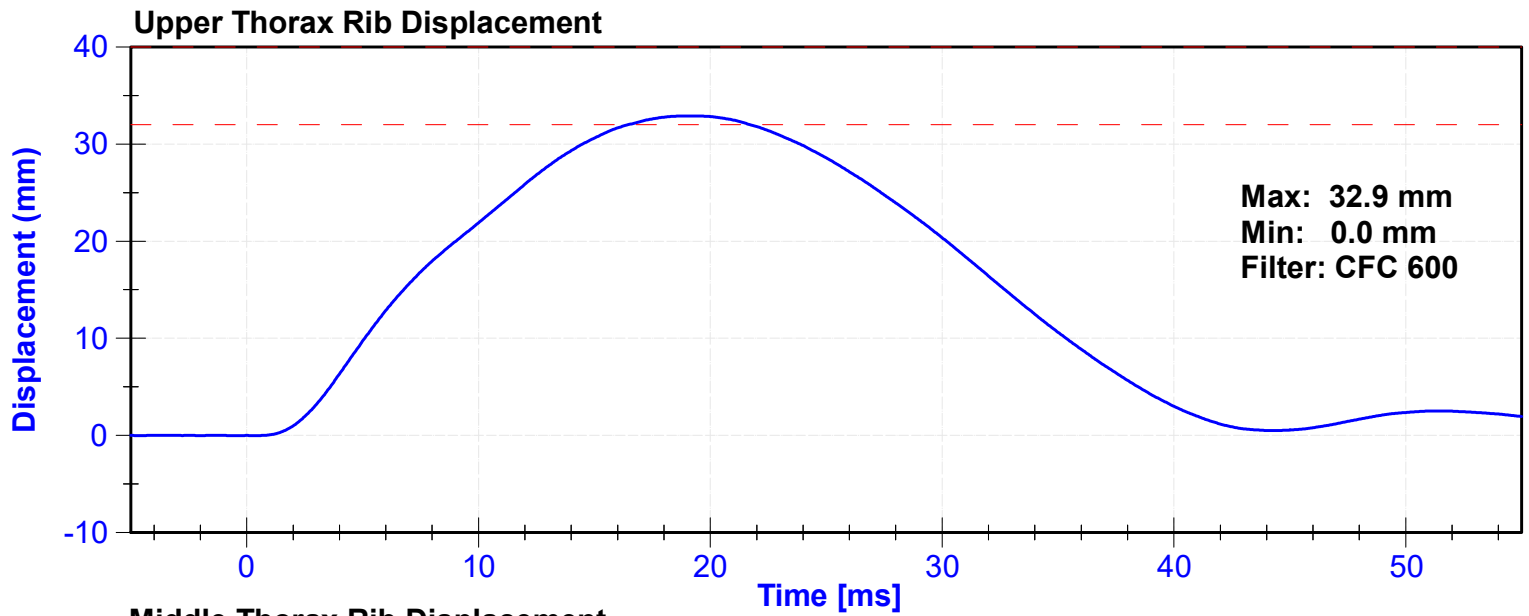

Lateral Upper Spine Acceleration

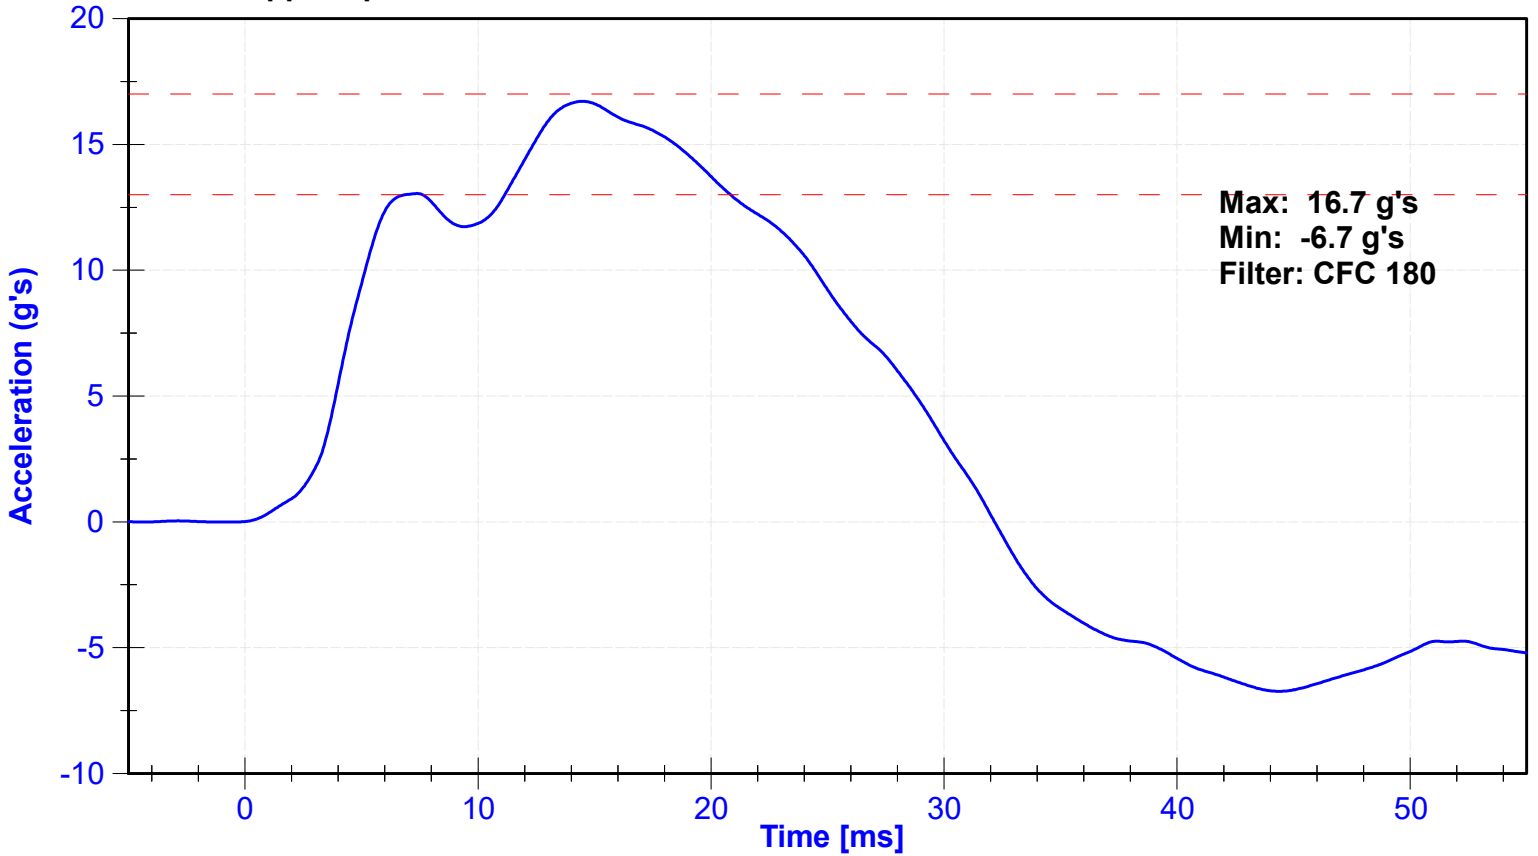

Lateral Lower Spine Acceleration

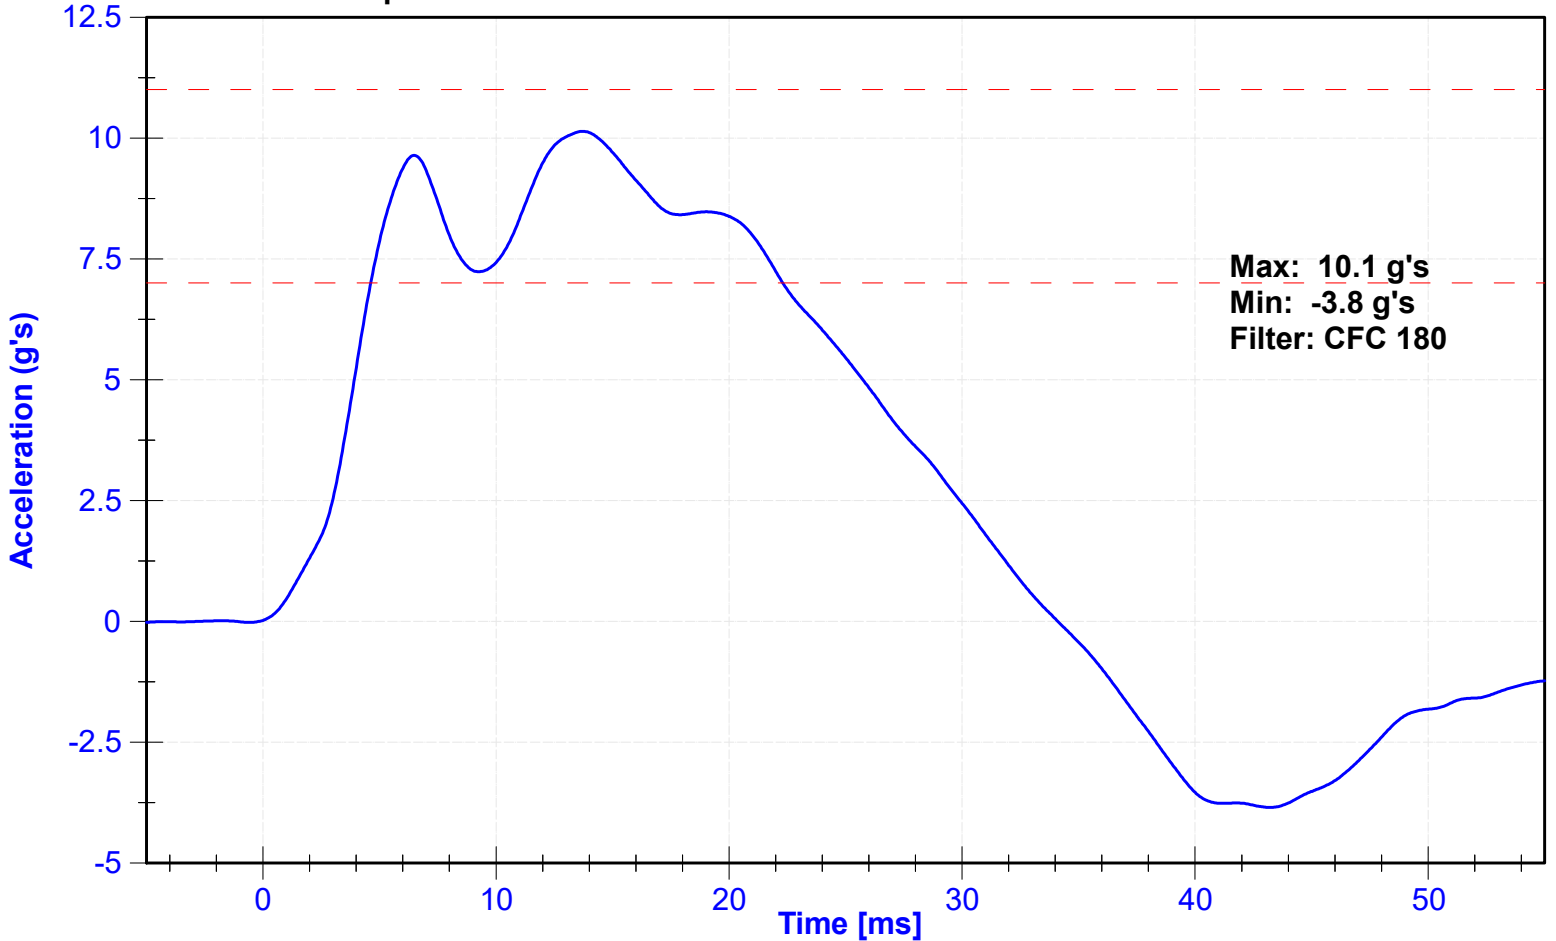

| | | | |
|-------------------|------|-----------------------|--------------|
| ATD Manufacturer | FTSS | Test Technician | Z. Schneider |
| ATD Serial Number | 261 | Laboratory Supervisor | K. Brogan |


Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|----------------------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.3 | Pass |
| Humidity | 10 | 70 | % | 20 | Pass |
| Velocity | 4.2 | 4.4 | m/s | 4.25 | Pass |
| Probe Acceleration | 12 | 16 | g's | 15.1 | Pass |
| Lateral Lower Spine Acceleration | 9 | 14 | g's | 10.4 | Pass |
| Upper Abdomen Rib Deflection | 36 | 47 | mm | 39.0 | Pass |
| Lower Abdomen Rib Deflection | 33 | 44 | mm | 38.8 | Pass |


Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------------------------------|--------------|---------------|------------------|----------------------|
| Probe Accelerometer | Endevco | P51736 | 10/25/2022 | 4/23/2023 |
| Lower Spine Y Accelerometer | Endevco | P58744 | 10/25/2022 | 4/23/2023 |
| Upper Abdomen Rib Potentiometer | Servo | 342GFE | 11/1/2022 | 5/2/2023 |
| Lower Abdomen Rib Potentiometer | Servo | 512GFE | 11/1/2022 | 5/2/2023 |


Probe Acceleration

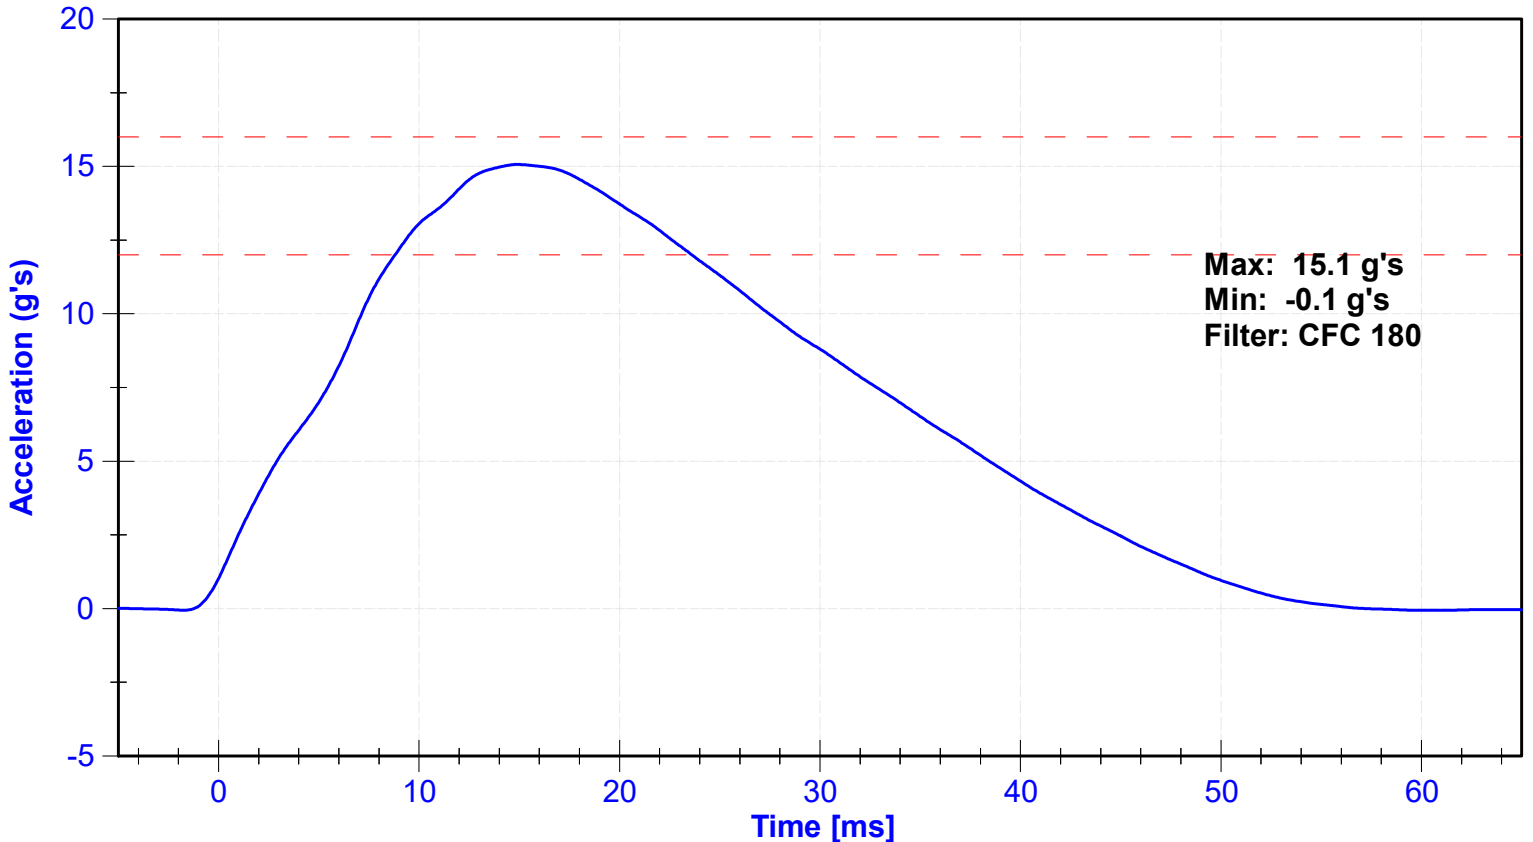


Upper Abdomen Rib Displacement

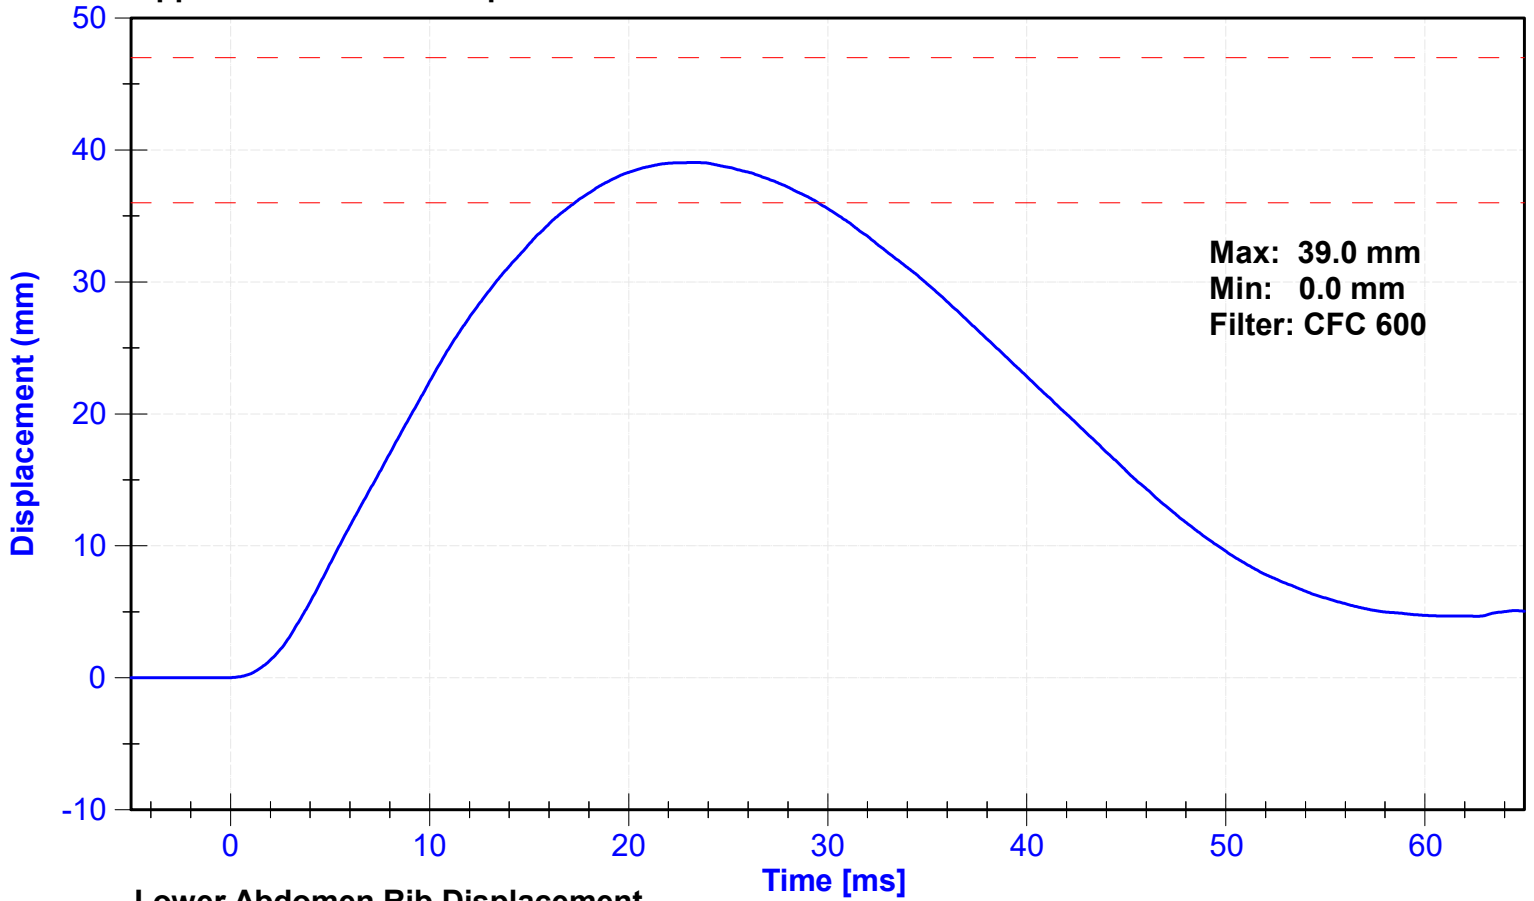

Lower Abdomen Rib Displacement

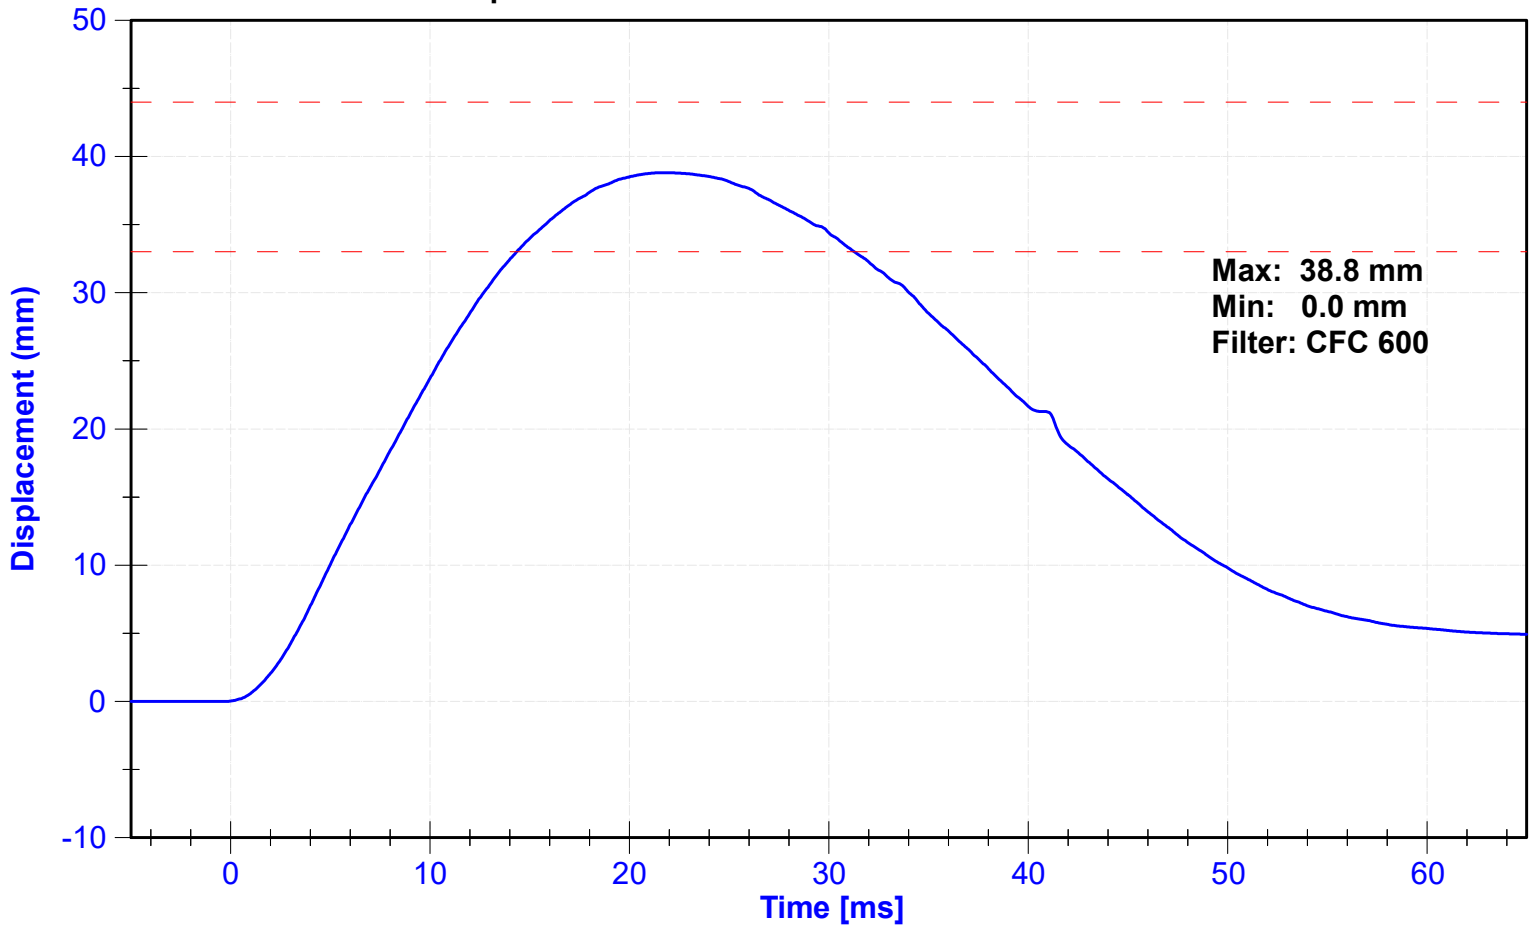

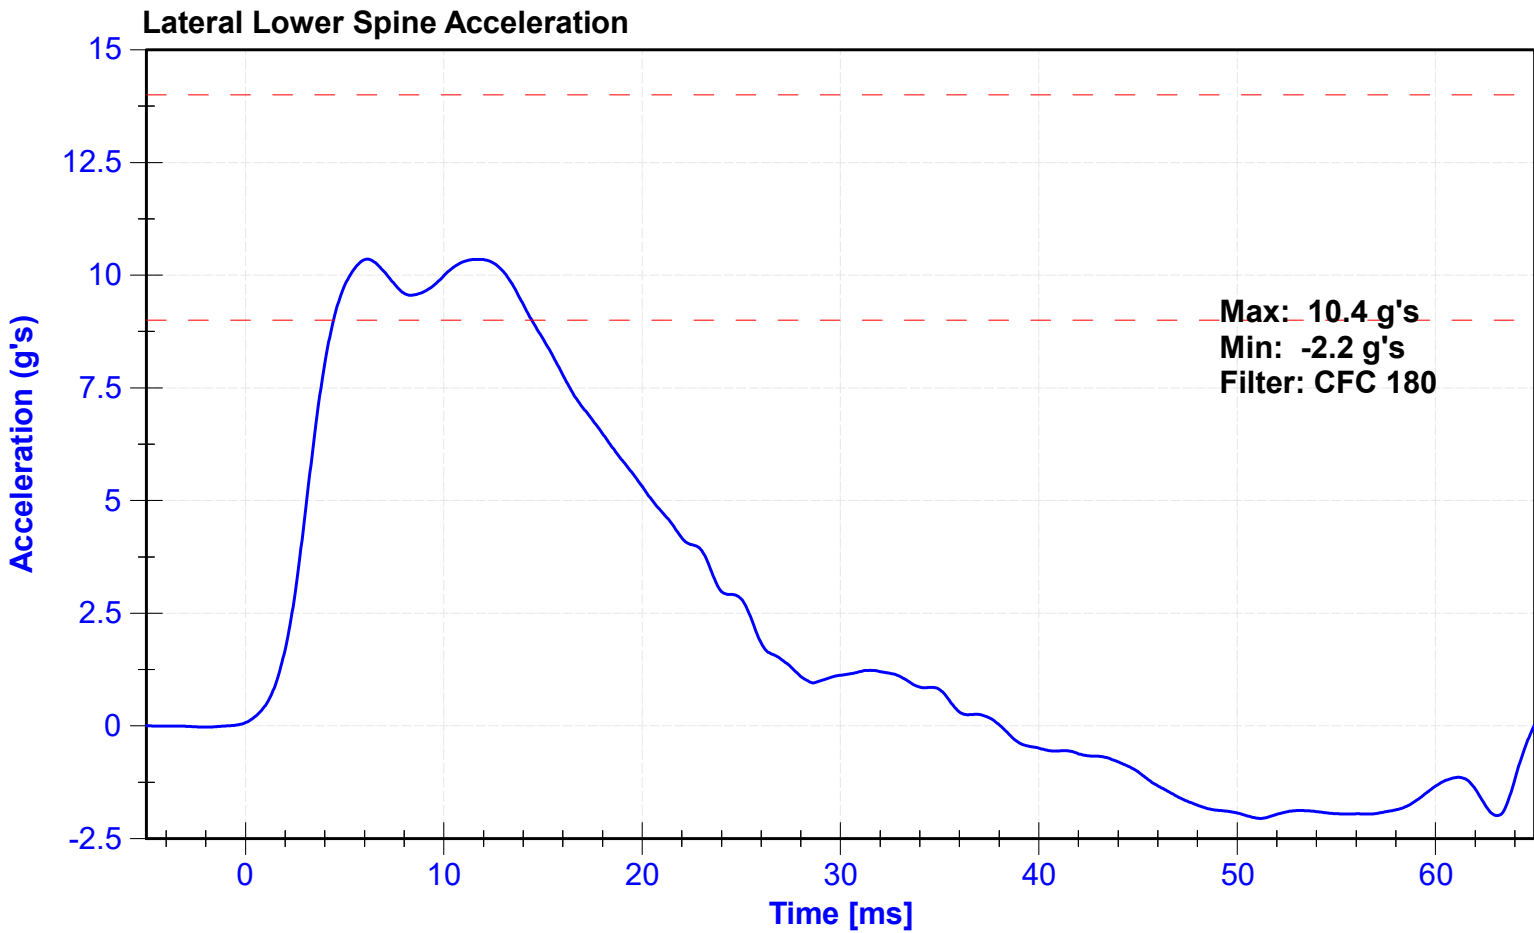

| | | | |
|-------------------|------|-----------------------|--------------|
| ATD Manufacturer | FTSS | Test Technician | Z. Schneider |
| ATD Serial Number | 261 | Laboratory Supervisor | K. Brogan |


Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|---------------------------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.3 | Pass |
| Humidity | 10 | 70 | % | 20 | Pass |
| Velocity | 6.6 | 6.8 | m/s | 6.61 | Pass |
| Probe Acceleration | 38 | 47 | g's | 46.8 | Pass |
| Lateral Pelvis Acceleration after 6ms | 34 | 42 | g's | 41.3 | Pass |
| Acetabulum Force | 3600 | 4300 | N | 4171.4 | Pass |


Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|------------------------|--------------|---------------|------------------|----------------------|
| Pendulum Accelerometer | Endevco | P51736 | 10/25/2022 | 4/23/2023 |
| Pelvis Y Accelerometer | Endevco | P94678 | 10/25/2022 | 4/23/2023 |
| Acetabulum Load Cell | Denton | 275-FY | 8/11/2022 | 8/11/2023 |
| Certification Plug | SACO | | | N/A |
| Crash Test Plug | SACO | | | N/A |


Probe Acceleration

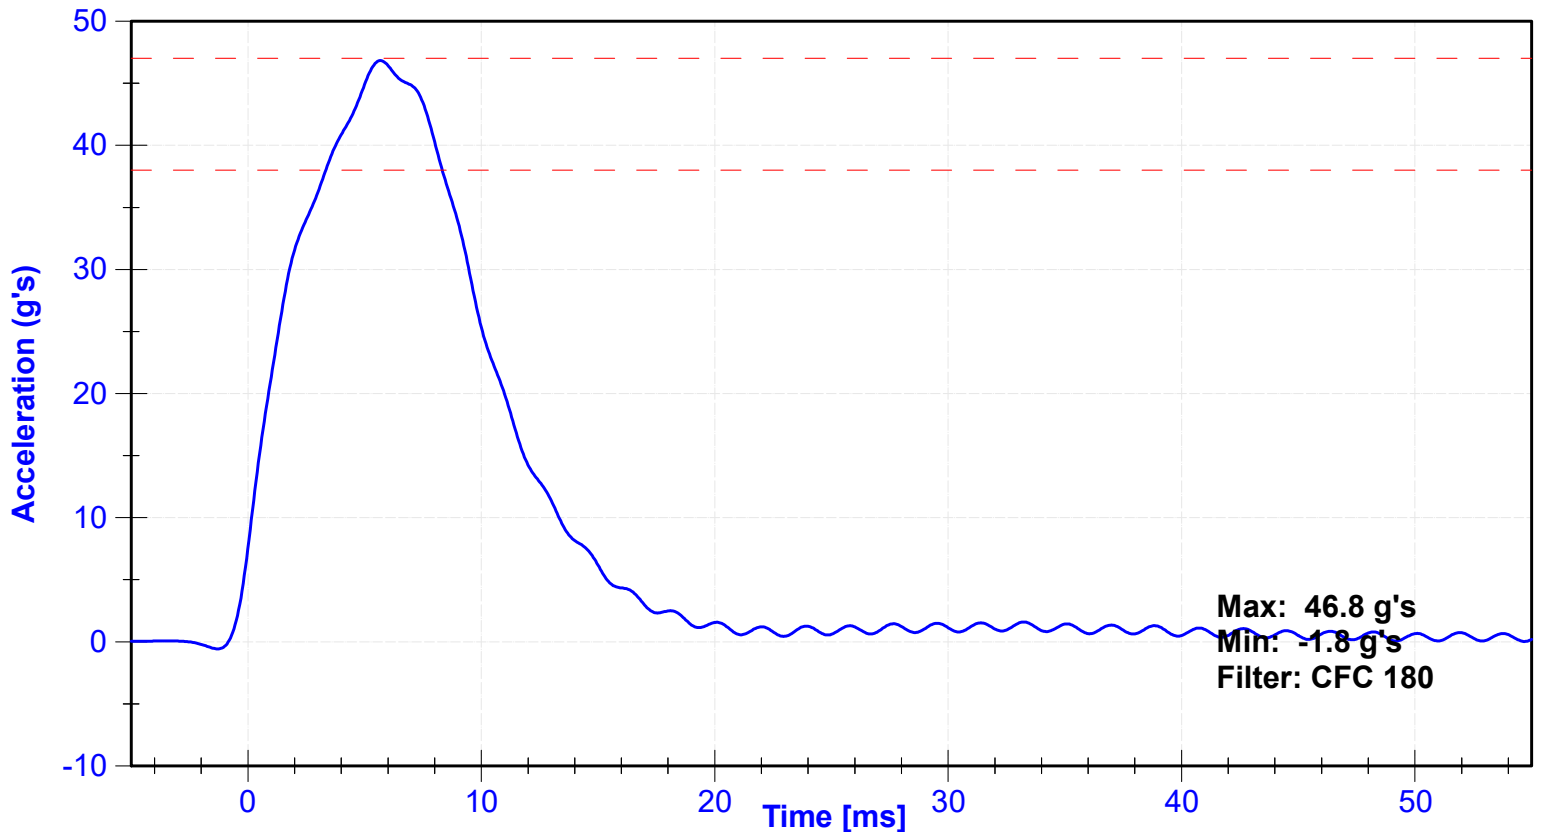

Lateral Pelvis Acceleration

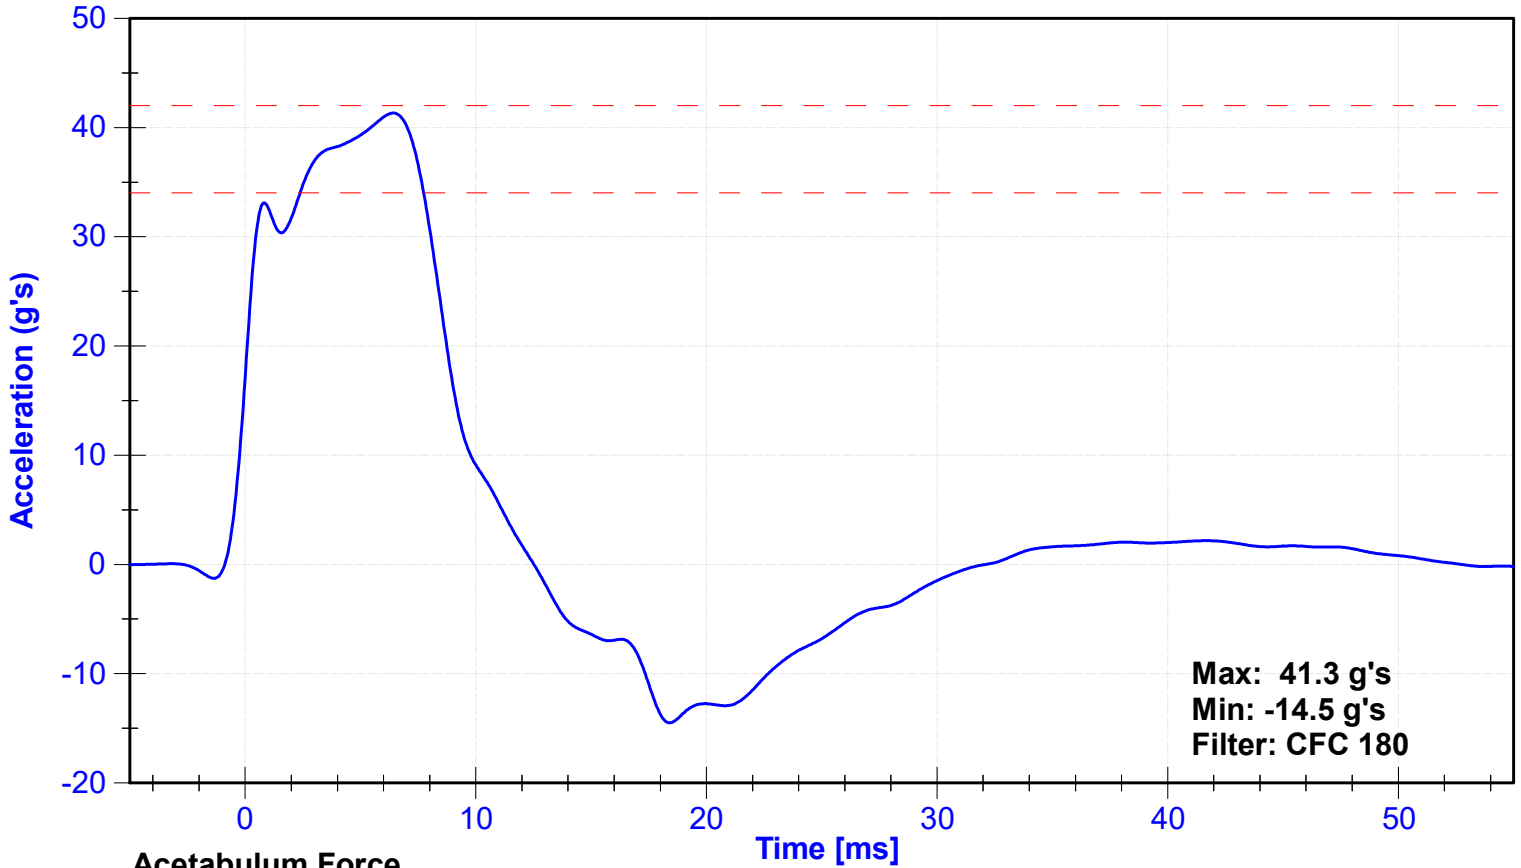

Acetabulum Force

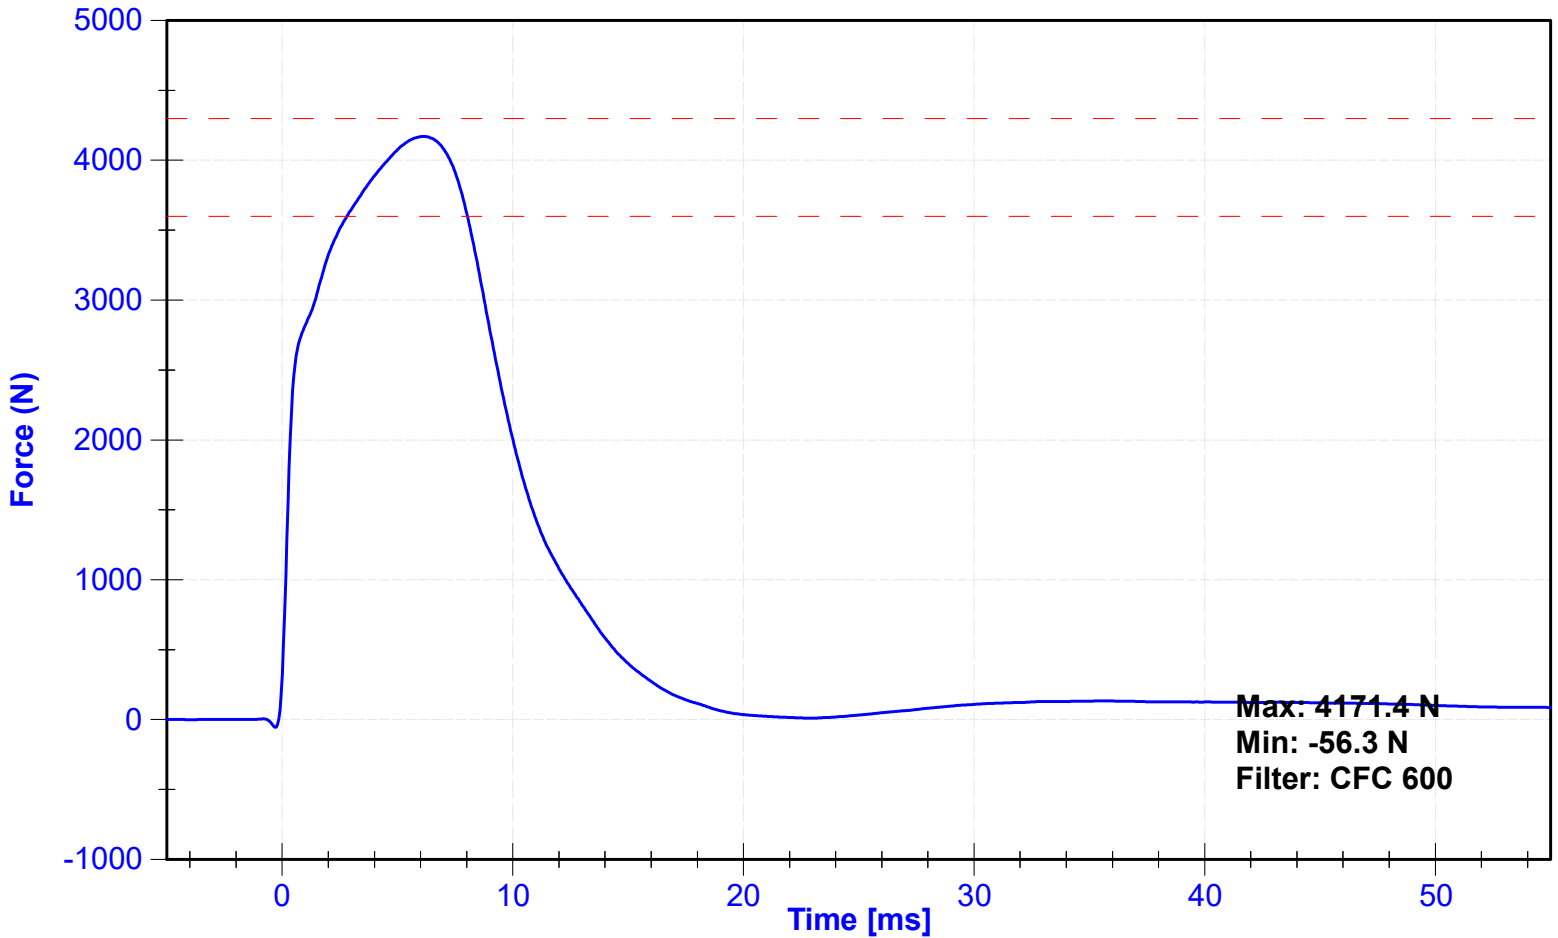



CERT Attempt 2
11/24/22

SID-IIs Pelvis Plug Certification Test

Plug S/N 15336

Test Number 19683

Report Number 19735

Test Date 7/20/2021 11:46:58 AM


| | Test Results | Spec Min | Spec Max |
|--------------------|--------------|----------|----------|
| Force @ 0.5 mm (N) | 254 | 50 | 600 |
| Force @ 1.5 mm (N) | 1,144 | 850 | 1,400 |
| Force @ 2.5 mm (N) | 1,435 | 1,306 | 1,618 |
| Force @ 3.0 mm (N) | 1,468 | 1,361 | 1,673 |

Testing Machine STM-20 5965542
Load Cell S/N (F1360947), Units (LBS) 1000

Crosshead Speed (mm / min) or Rate 12.7
Extension or Position Measured by XHD_100 (XHD100)

Notes:

Force (-N) vs Extension (-mm)

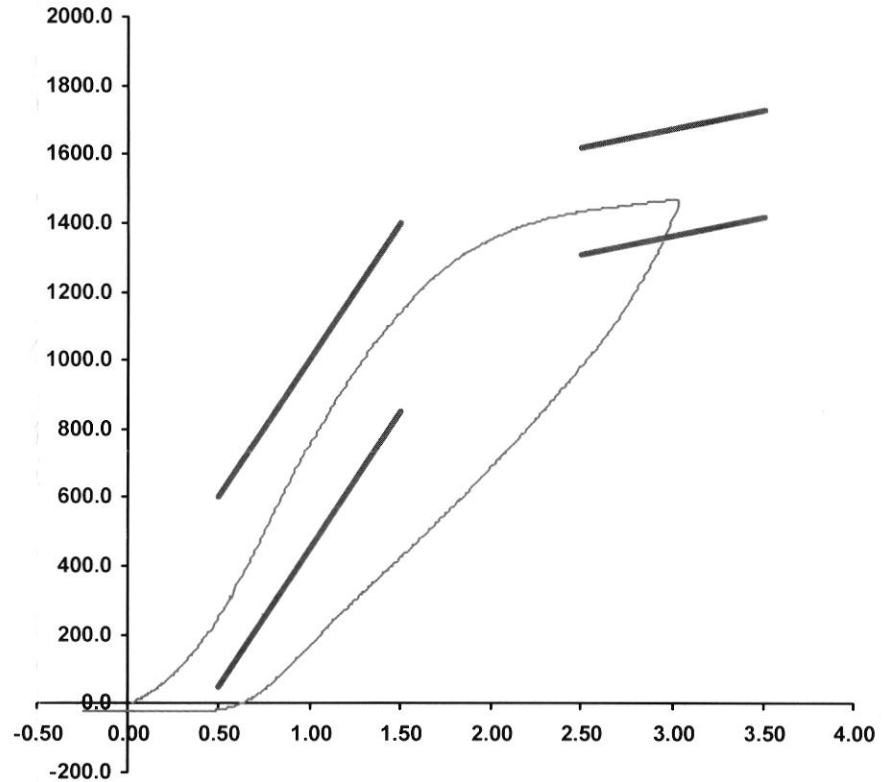

Operator

Part Number 180-4450

Template No 107 20-Jul-21

SACO Research

By : DC Date : 7/20/2021



Impact 261

SID-IIs Pelvis Plug Certification Test

Plug S/N 15165

Test Number 17881

Report Number 17930


Test Date 3/8/2021 11:54:27 AM

| | Test Results | Spec Min | Spec Max |
|--------------------|--------------|----------|----------|
| Force @ 0.5 mm (N) | 367 | 50 | 600 |
| Force @ 1.5 mm (N) | 1,193 | 850 | 1,400 |
| Force @ 2.5 mm (N) | 1,425 | 1,306 | 1,618 |
| Force @ 3.0 mm (N) | 1,476 | 1,361 | 1,673 |

Testing Machine STM-20 5965542
 Load Cell S/N (FI360947), Units (LBS) 1000
 Crosshead Speed (mm / min) or Rate 12.7
 Extension or Position Measured by XHD_100 (XHD100)

Notes:

Force (-N) vs Extension (-mm)

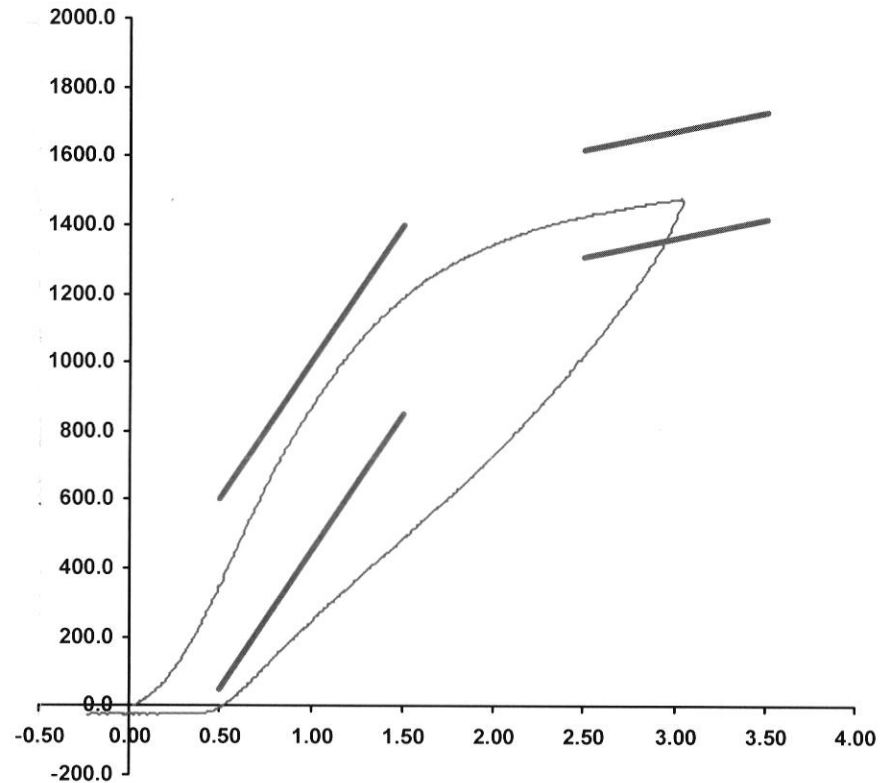

Operator

Part Number 180-4450

Template No 107

08-Mar-21

SACO Research

By: *De*

Date: 3/8/2021



Non-Impact 261

SID-IIs Pelvis Plug Certification Test

Plug S/N 15457

Test Number 20118

Report Number 20172

Test Date 9/9/2021 10:58:24 AM

| | Test Results | Spec Min | Spec Max |
|--------------------|--------------|----------|----------|
| Force @ 0.5 mm (N) | 298 | 50 | 600 |
| Force @ 1.5 mm (N) | 1,245 | 850 | 1,400 |
| Force @ 2.5 mm (N) | 1,490 | 1,306 | 1,618 |
| Force @ 3.0 mm (N) | 1,517 | 1,361 | 1,673 |

Testing Machine STM-20 5965542
 Load Cell S/N (FI360947), Units (LBS) 1000
 Preload Value (-N) 22.24
 Crosshead Speed (mm / min) or Rate 12.7
 Extension or Position Measured by XHD_100 (XHD100)

Notes:


Operator _____
 Part Number 180-4450

Template No 107 09-Sep-21
 SACO Research

By : DC Date : 9/9/2021

SACO Research 41735 Elm St, #401 Murrieta, CA 92562 Tel 310-694-2082 FAX

Force (-N) vs Extension (-mm)

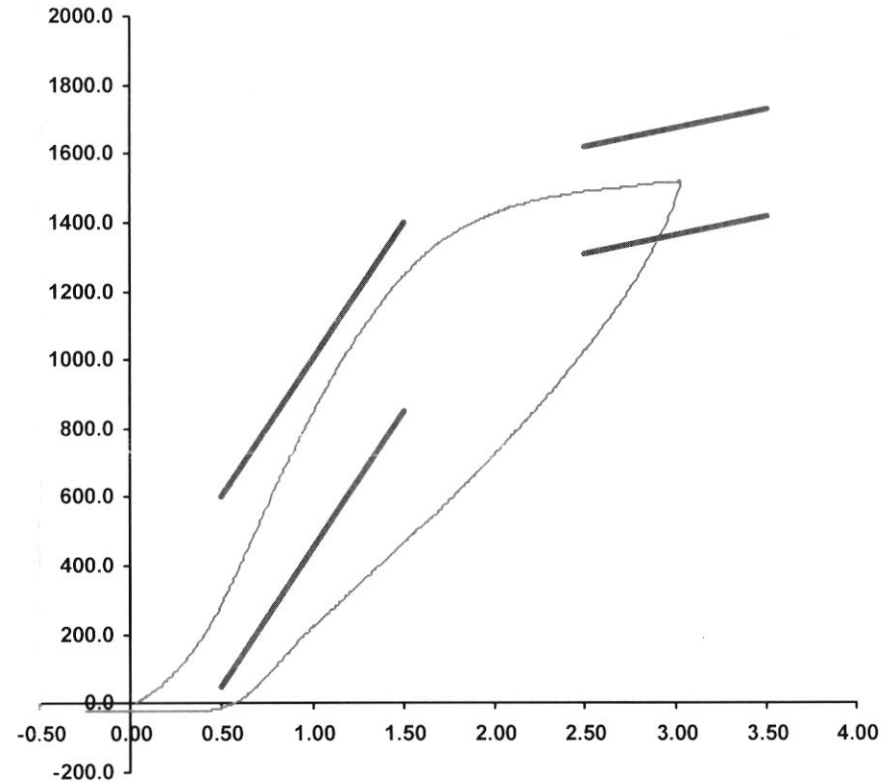

| | | | |
|-------------------|------|-----------------------|--------------|
| ATD Manufacturer | FTSS | Test Technician | Z. Schneider |
| ATD Serial Number | 261 | Laboratory Supervisor | K. Brogan |


Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|-----------------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.3 | Pass |
| Humidity | 10 | 70 | % | 20 | Pass |
| Velocity | 4.2 | 4.4 | m/s | 4.31 | Pass |
| Probe Acceleration | 36 | 45 | g's | 37.9 | Pass |
| Lateral Pelvis Acceleration | 28 | 39 | g's | 29.0 | Pass |
| Iliac Force | 4100 | 5100 | N | 4100.2 | Pass |


Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|------------------------|--------------|---------------|------------------|----------------------|
| Pendulum Accelerometer | Endevco | P51736 | 10/25/2022 | 4/23/2023 |
| Pelvis Y Accelerometer | Endevco | P94678 | 10/25/2022 | 4/23/2023 |
| Iliac Load Cell | Denton | 279-FY | 8/11/2022 | 8/11/2023 |


Probe Acceleration

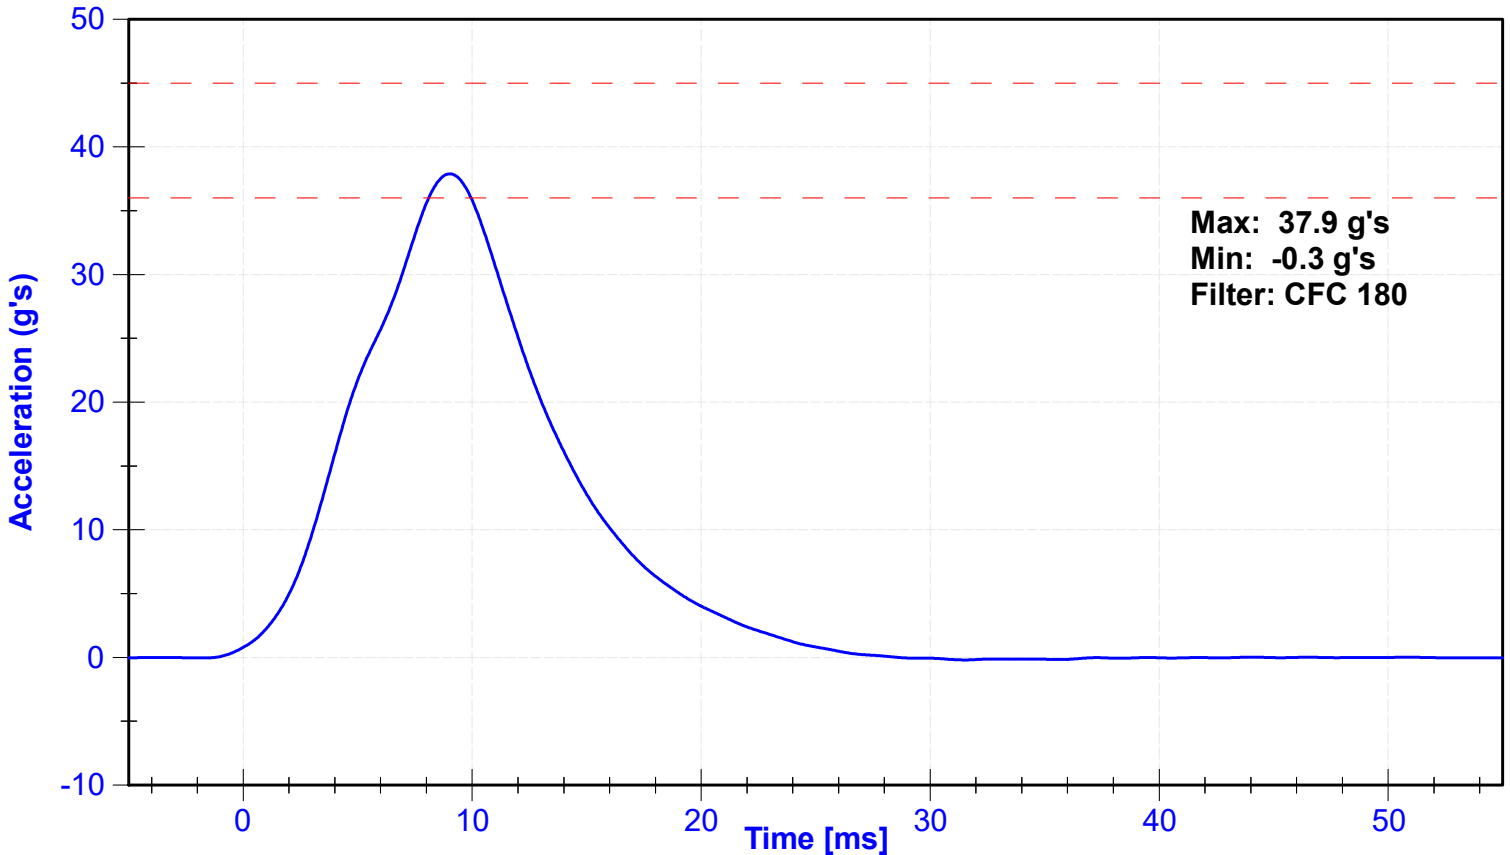

Lateral Pelvis Acceleration

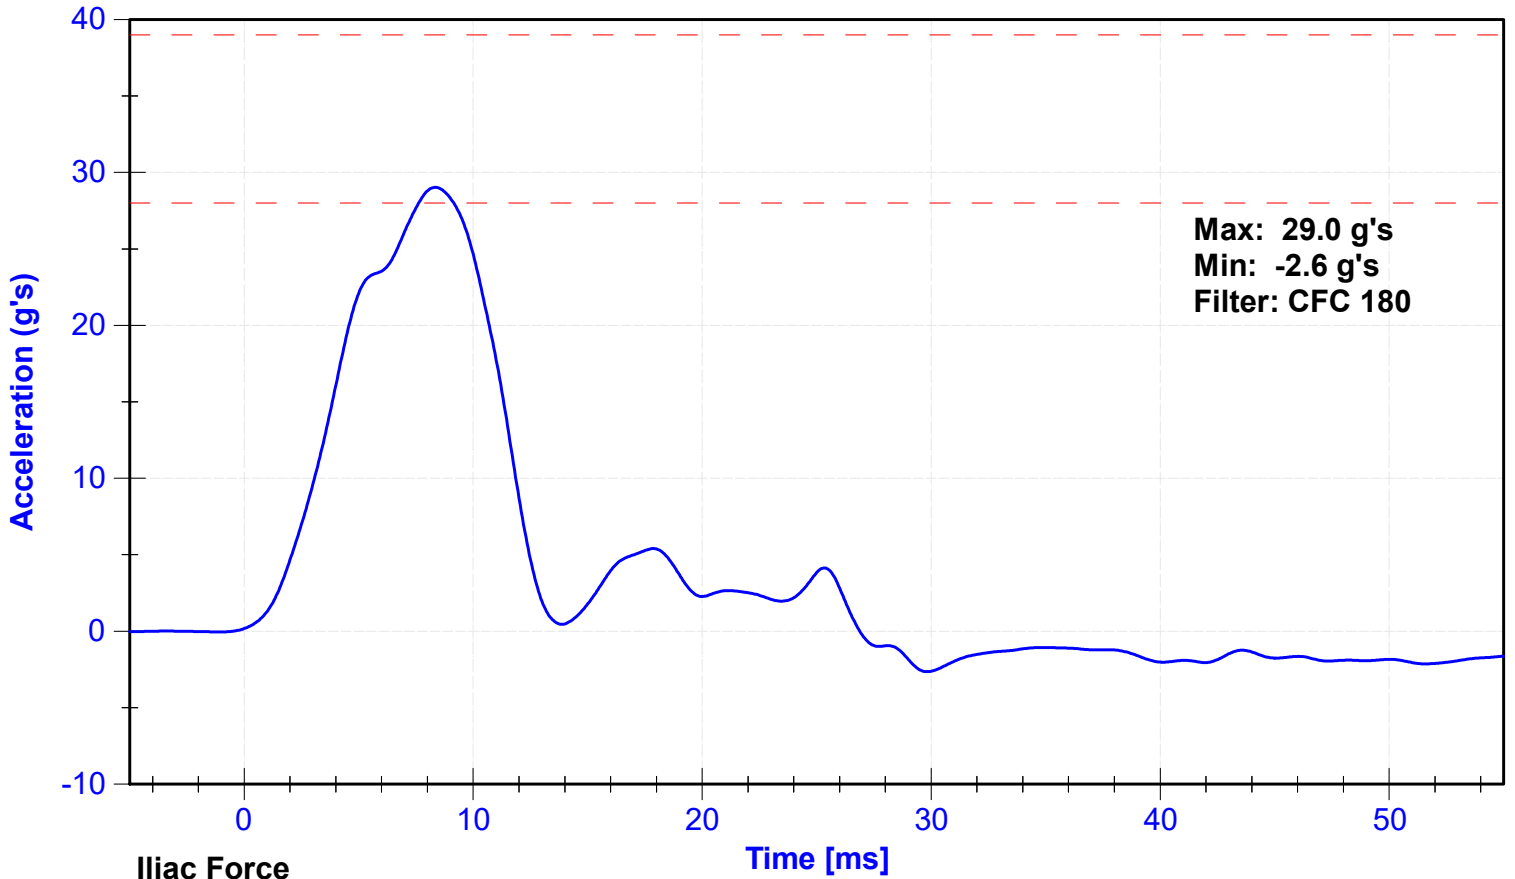

Iliac Force

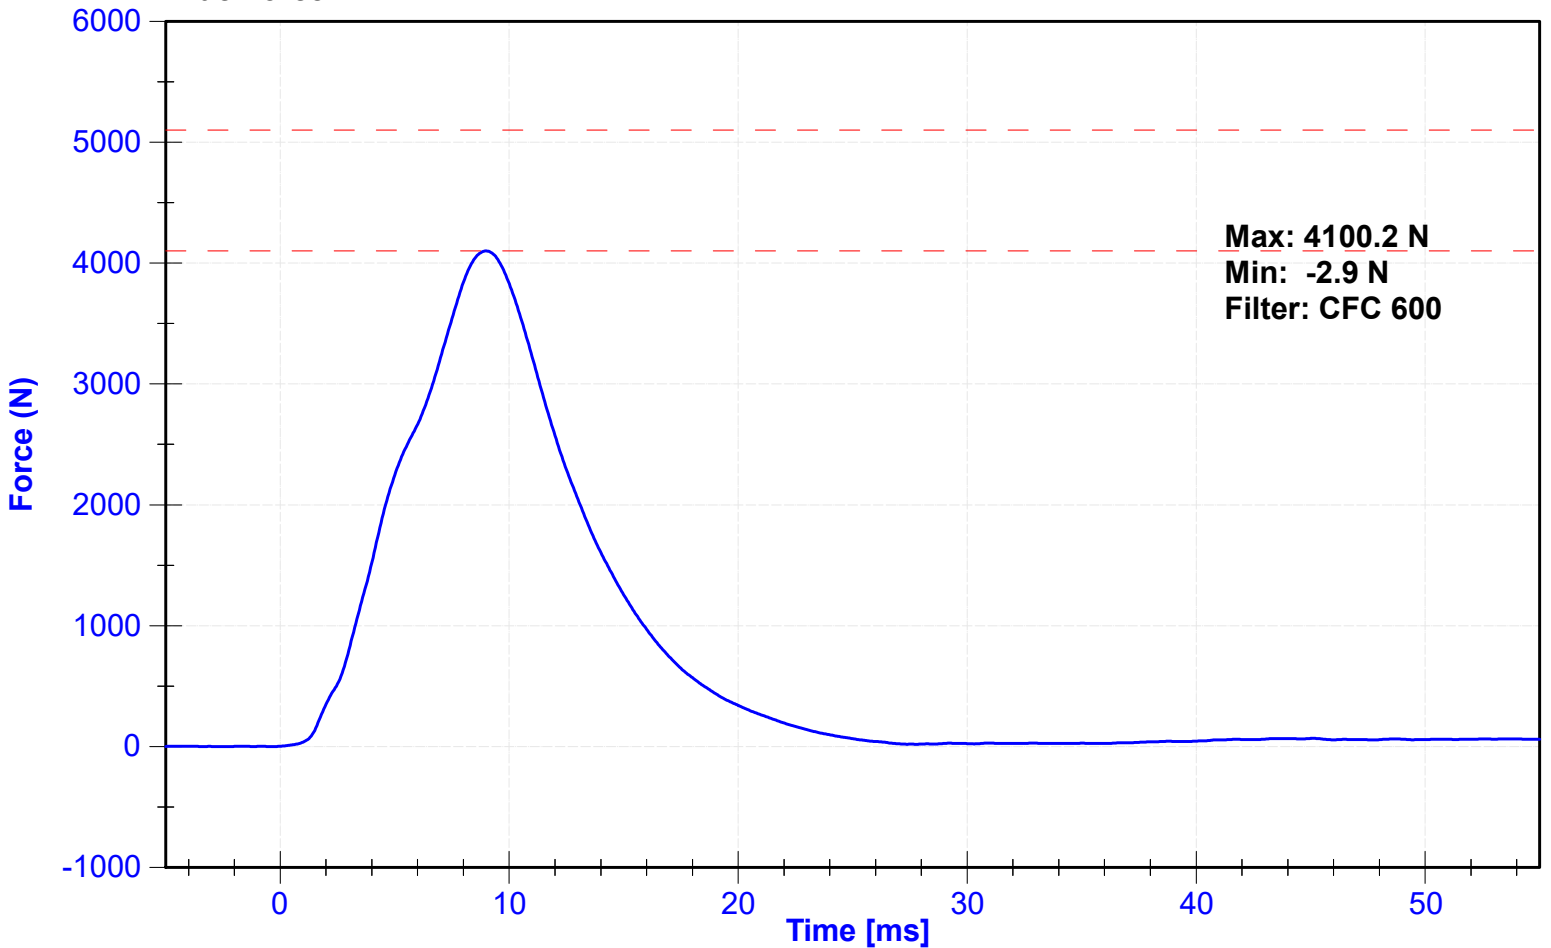

**POST-TEST
SID-IIs PERFORMANCE CALIBRATION TEST DATA**





External Measurements - SID-IIs

Technician: K. Brogan

Date: 11/30/2022

Dummy Serial Number: 261

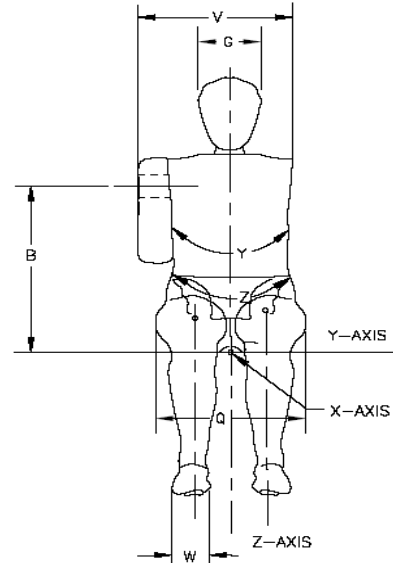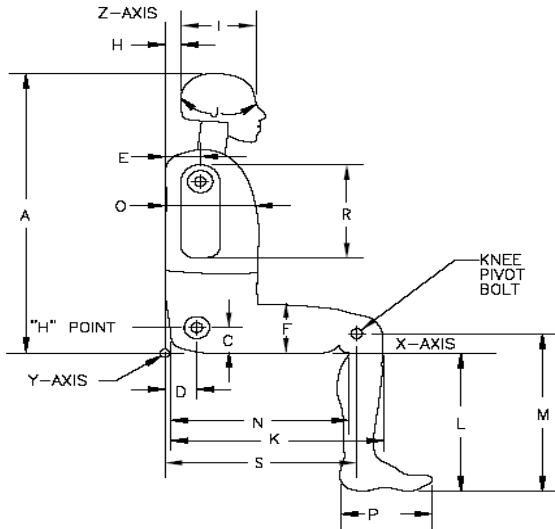

| Symbol | Description | Specification (mm) | | Result (mm) | Pass/Fail |
|--------|------------------------------|--------------------|-----|-------------|-----------|
| A | Sitting Height | 772 | 788 | 786 | Pass |
| B | Shoulder Pivot Height | 437 | 453 | 445 | Pass |
| C | H-point Height | 79 | 89 | 84 | Pass |
| D | H-point from seatback | 141 | 151 | 145 | Pass |
| E | Shoulder Pivot from Backline | 97 | 107 | 103 | Pass |
| F | Thigh Clearance | 119 | 135 | 131 | Pass |
| G | Head Breadth | 140 | 148 | 145 | Pass |
| H | Head Back from Backline | 40 | 46 | 43 | Pass |
| I | Head Depth | 178 | 188 | 181 | Pass |
| J | Head Circumference | 541 | 551 | 547 | Pass |
| K | Buttock to Knee Length | 514 | 540 | 536 | Pass |
| L | Popliteal Height | 343 | 369 | 358 | Pass |
| M | Knee Pivot to floor height | 392 | 409 | 401 | Pass |
| N | Buttock Popliteal Length | 416 | 442 | 433 | Pass |
| O | Chest Depth w/o jacket | 195 | 211 | 206 | Pass |
| P | Foot Length | 216 | 232 | 223 | Pass |
| Q | Hip Breadth (w/pelvic plugs) | 313 | 323 | 312 | Pass |
| R | Arm Length | 249 | 259 | 254 | Pass |
| S | Knee Joint to seatback | 477 | 493 | 485 | Pass |
| V | Shoulder Width | 341 | 357 | 351 | Pass |
| W | Foot Width | 78 | 94 | 84 | Pass |
| Y | Chest Circumference w/jacket | 851 | 881 | 873 | Pass |
| Z | Waist Circumference | 761 | 791 | 772 | Pass |


| | | | |
|-------------------|------|-----------------------|------------|
| ATD Manufacturer | FTSS | Test Technician | D. Kroll |
| ATD Serial Number | 261 | Laboratory Supervisor | C. Mantell |




Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|------------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.8 | Pass |
| Humidity | 10 | 70 | % | 30.2 | Pass |
| Resultant Acceleration | 115 | 137 | g's | 122.3 | Pass |
| Oscillation | 0 | 15 | % | 3.4 | Pass |
| Fore-Aft Acceleration | -15 | 15 | g's | 5.2 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibratio Date | Calibratio Due Date |
|-----------------|--------------|---------------|-----------------|---------------------|
| X Accelerometer | Endevco | P68067 | 10/26/2022 | 4/24/2023 |
| Y Accelerometer | Endevco | P18567 | 10/25/2022 | 4/23/2023 |
| Z Accelerometer | Endevco | P49163 | 10/25/2022 | 4/23/2023 |

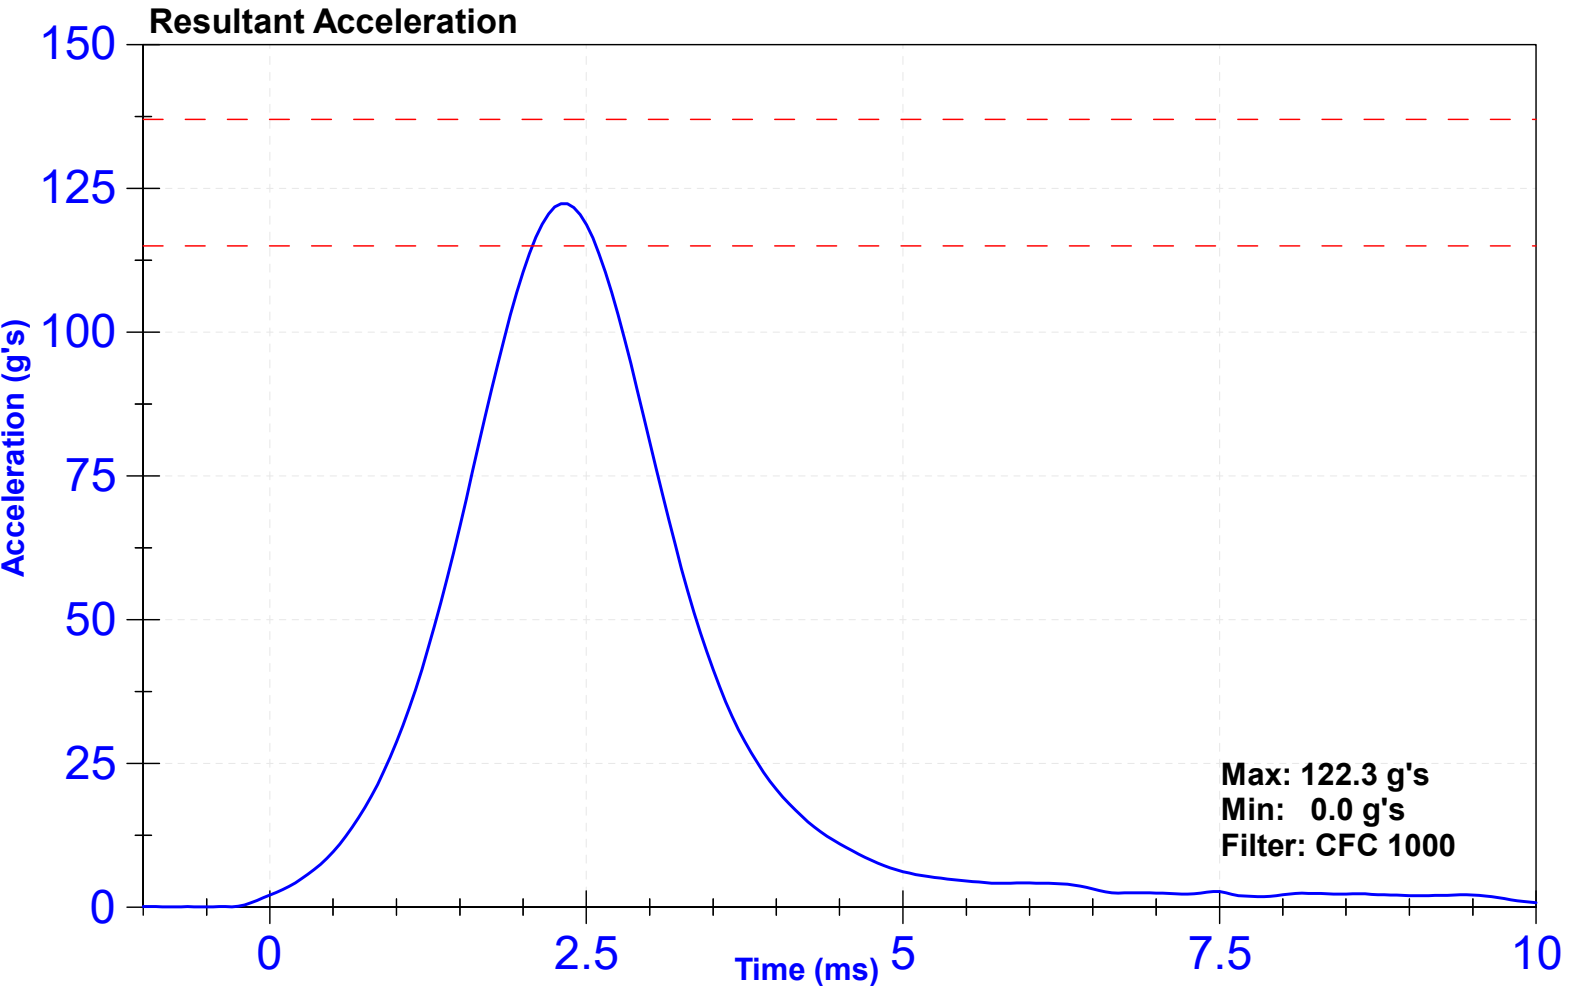

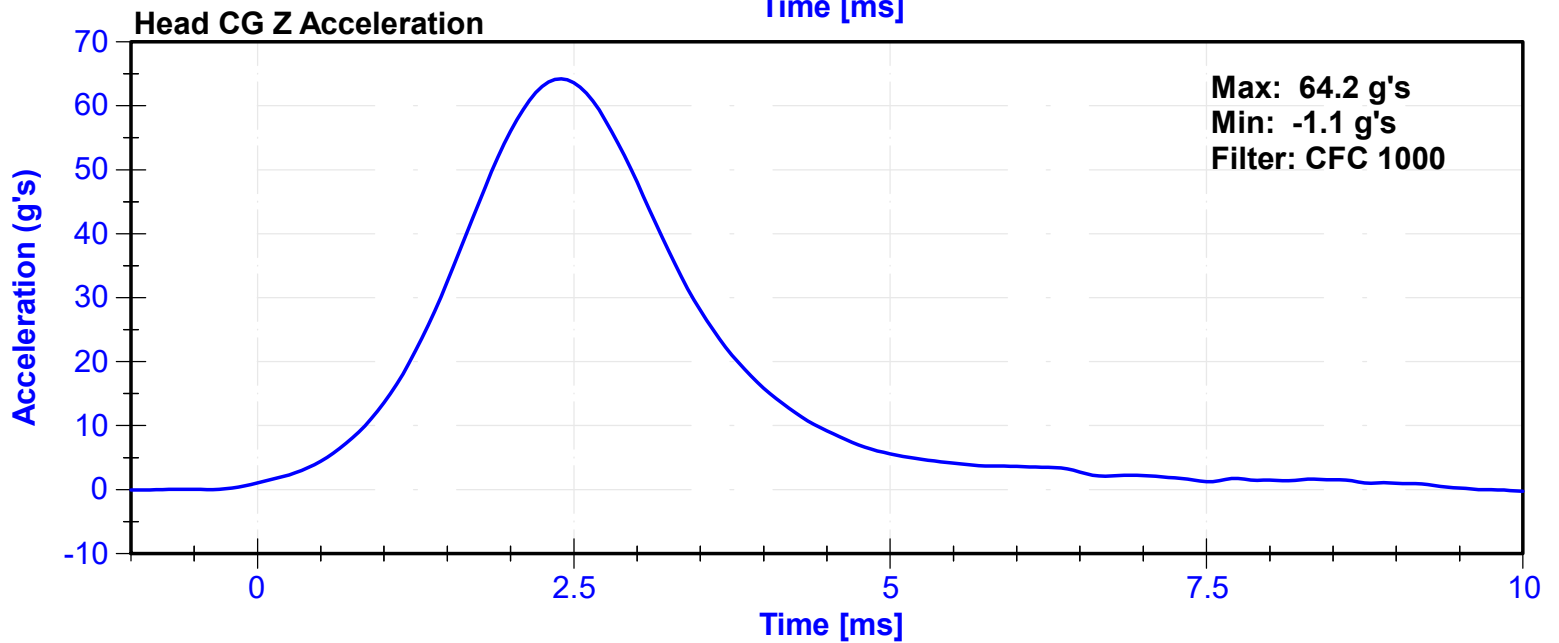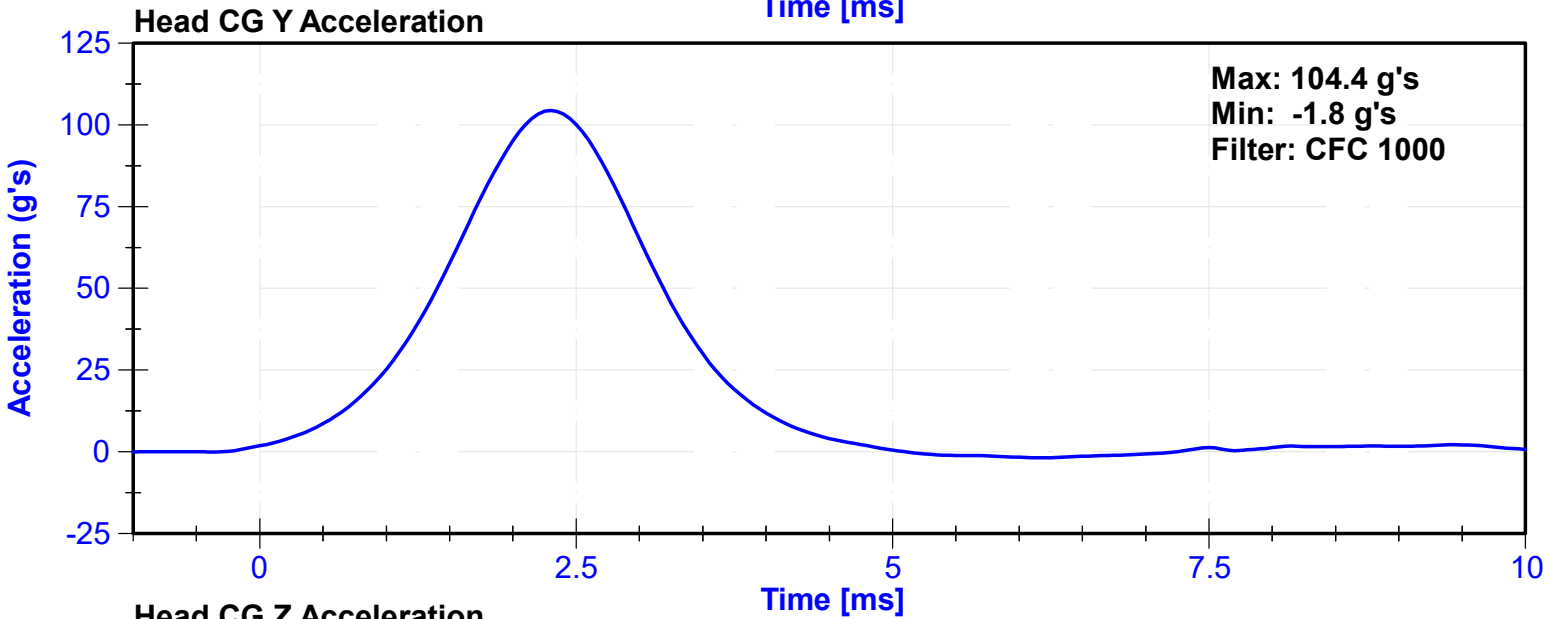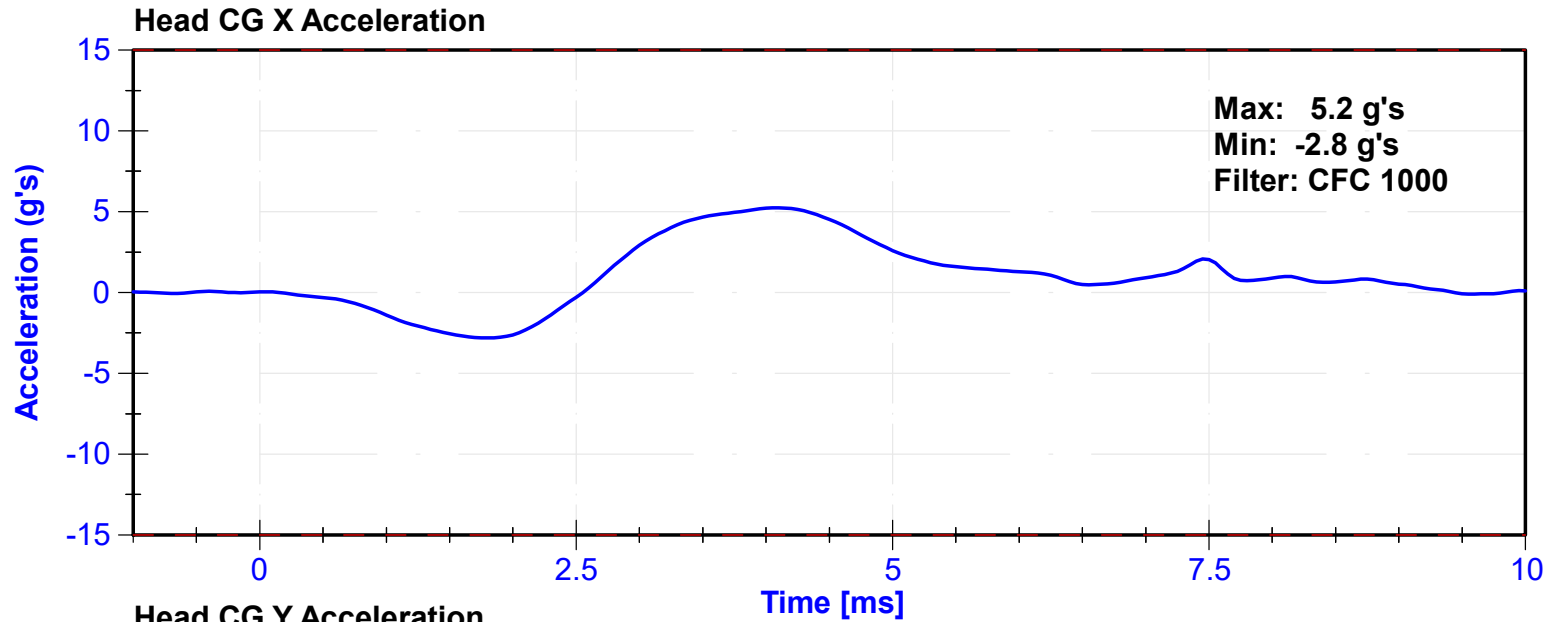


| | | | |
|-------------------|------|-----------------------|------------|
| ATD Manufacturer | FTSS | Test Technician | D. Kroll |
| ATD Serial Number | 261 | Laboratory Supervisor | C. Mantell |



Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|-----------------------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.4 | Pass |
| Humidity | 10 | 70 | % | 39.8 | Pass |
| Velocity | 5.51 | 5.63 | m/s | 5.589 | Pass |
| Pendulum Impulse at 10ms | 2.2 | 2.8 | m/s | 2.29 | Pass |
| Pendulum Impulse at 15ms | 3.3 | 4.1 | m/s | 3.39 | Pass |
| Pendulum Impulse at 20ms | 4.4 | 5.4 | m/s | 4.65 | Pass |
| Pendulum Impulse at 25ms | 5.4 | 6.1 | m/s | 5.51 | Pass |
| Pendulum Impulse from 25 to 100ms | 5.5 | 6.2 | m/s | 6.00 | Pass |
| Neck Rotation | 71 | 81 | deg | 71.1 | Pass |
| Time at Maximum Rotation | 50 | 70 | ms | 59.2 | Pass |
| Moment about the OC | 36 | 44 | Nm | 41.9 | Pass |
| Moment Decay to 0 Nm | 102 | 126 | ms | 108.1 | Pass |

Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|------------------------|--------------|---------------|------------------|----------------------|
| Pendulum Accelerometer | Endevco | 7231C-750 | 10/31/2022 | 4/29/2023 |
| Pendulum Potentiometer | Servo | 4961 | 11/11/2022 | 11/11/2023 |
| Condyle Potentiometer | Servo | DS185 | 11/11/2022 | 11/11/2023 |
| Upper Neck Load Cell | Humanetics | 1716A_1872-FY | 6/13/2022 | 6/13/2023 |

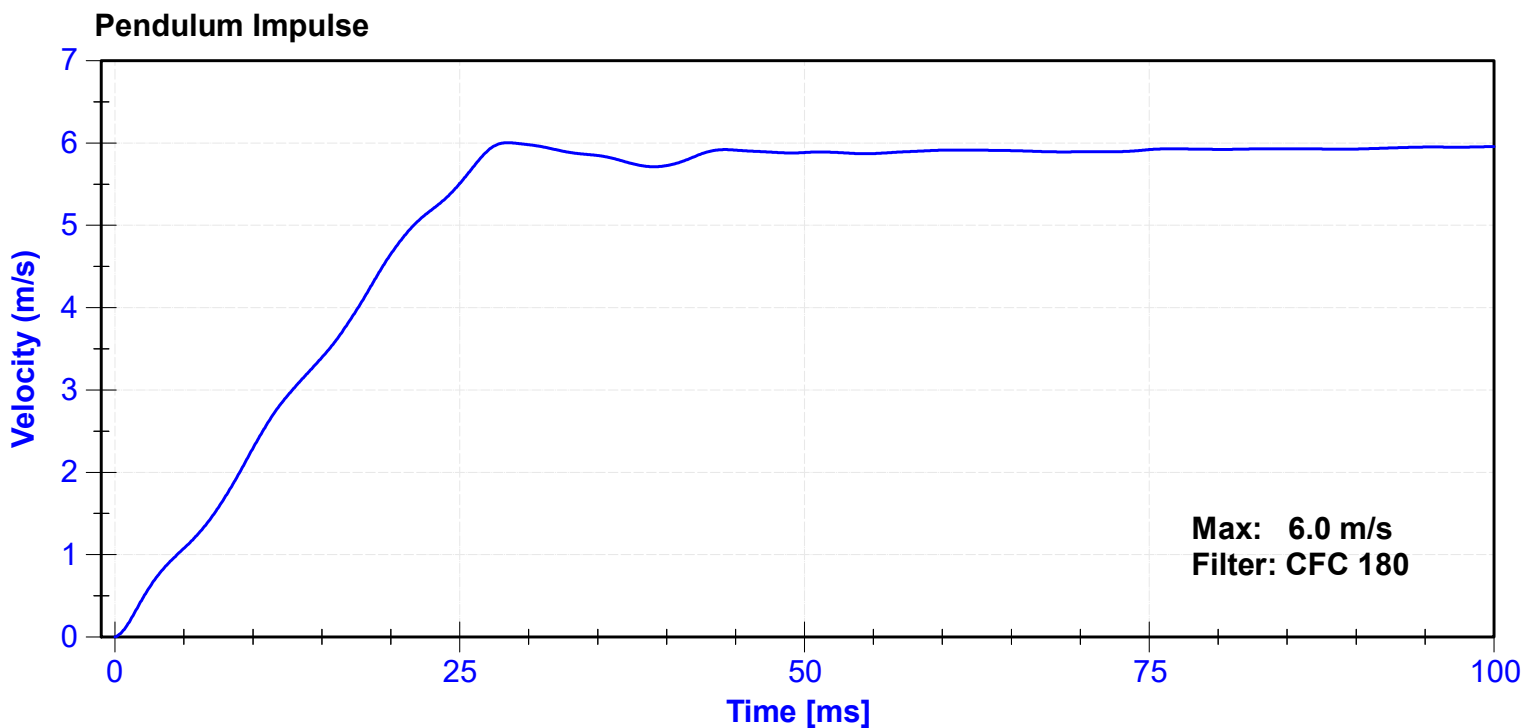

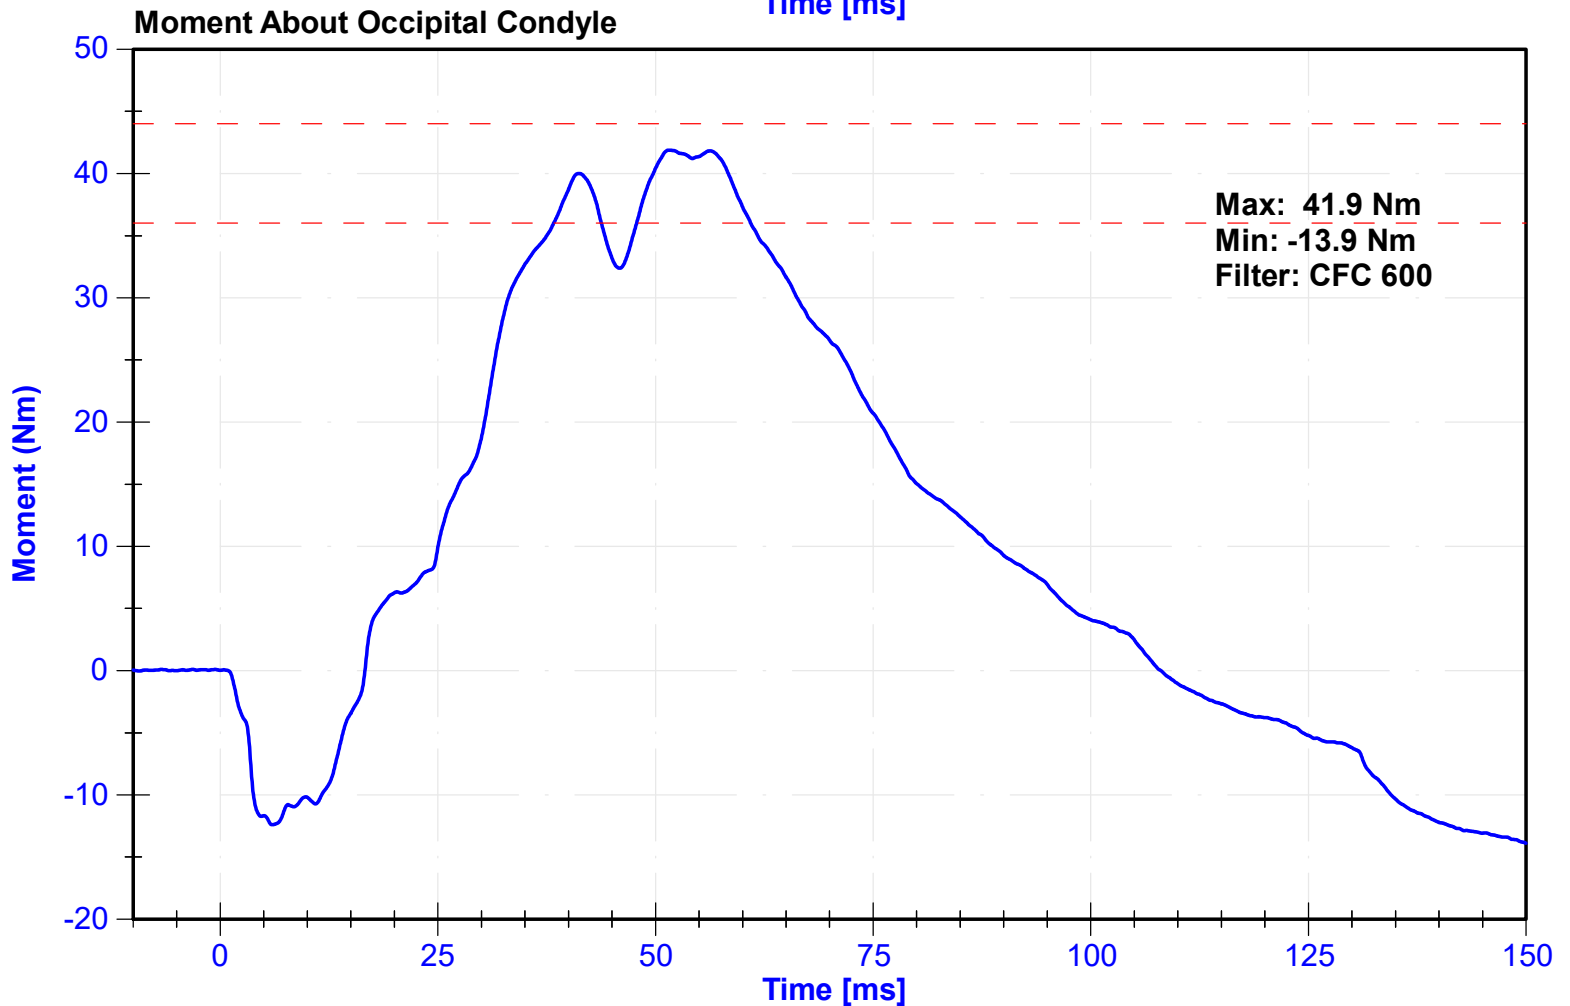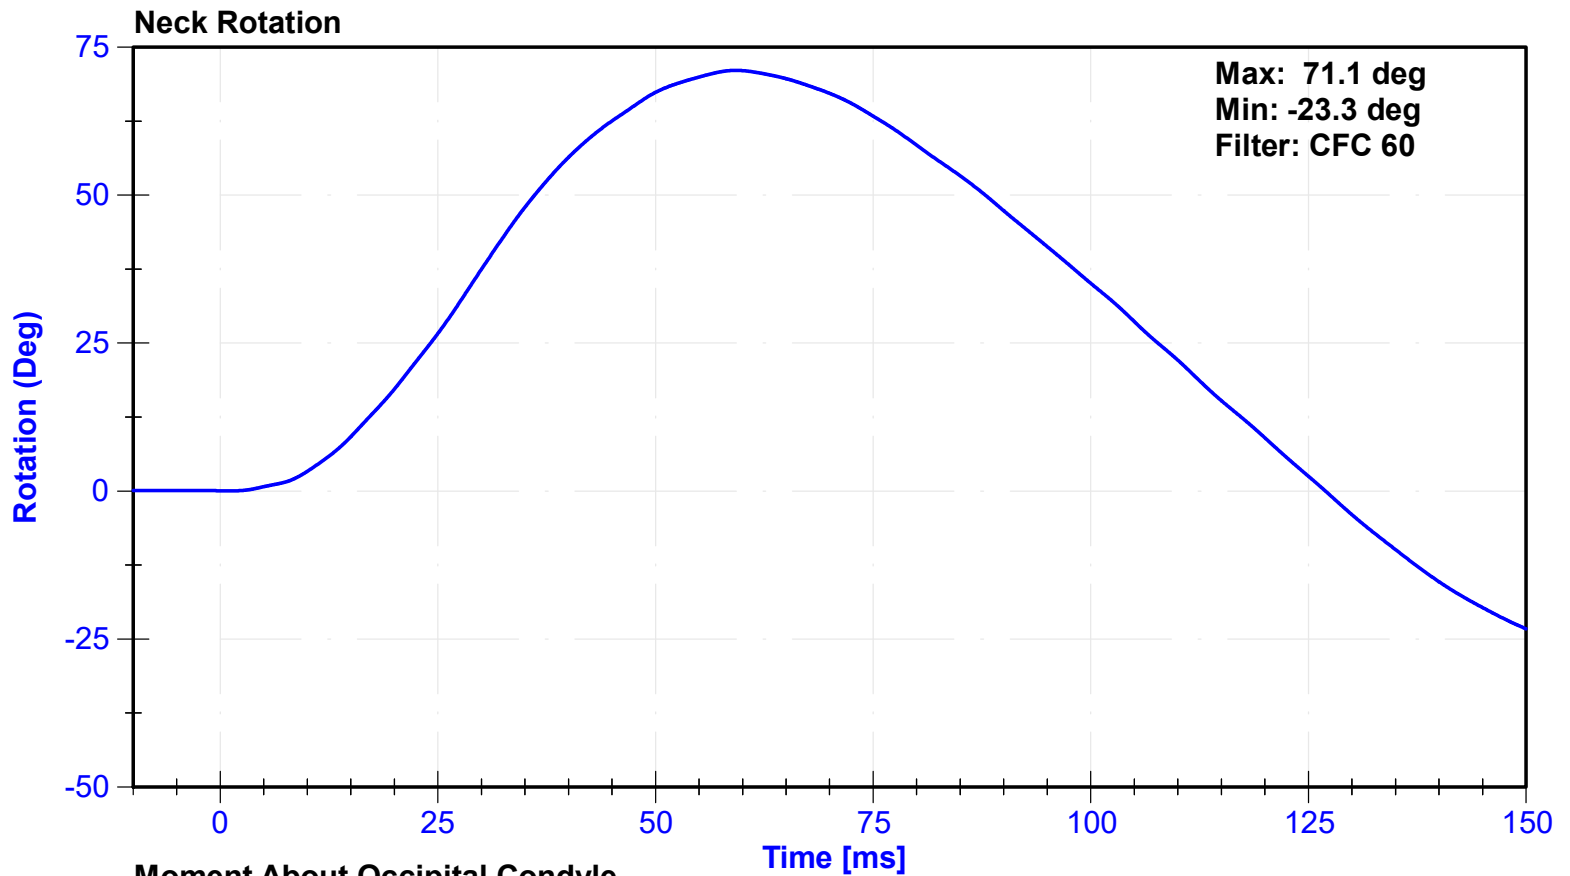

| | | | |
|-------------------|------|-----------------------|-----------|
| ATD Manufacturer | FTSS | Test Technician | D. Kroll |
| ATD Serial Number | 261 | Laboratory Supervisor | K. Brogan |


Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|----------------------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.1 | Pass |
| Humidity | 10 | 70 | % | 20 | Pass |
| Velocity | 4.2 | 4.4 | m/s | 4.27 | Pass |
| Probe Acceleration | 13 | 18 | g's | 15.9 | Pass |
| Shoulder Deflection | 28 | 37 | mm | 31.8 | Pass |
| Lateral Upper Spine Acceleration | 17 | 22 | g's | 19.4 | Pass |


Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|-----------------------------|--------------|---------------|------------------|----------------------|
| Pendulum Accelerometer | Endevco | P51736 | 10/25/2022 | 4/23/2023 |
| Shoulder Potentiometer | Servo | 572GFE | 11/1/2022 | 5/2/2023 |
| Upper Spine Y Accelerometer | Endevco | P18688 | 10/25/2022 | 4/23/2023 |


Probe Acceleration

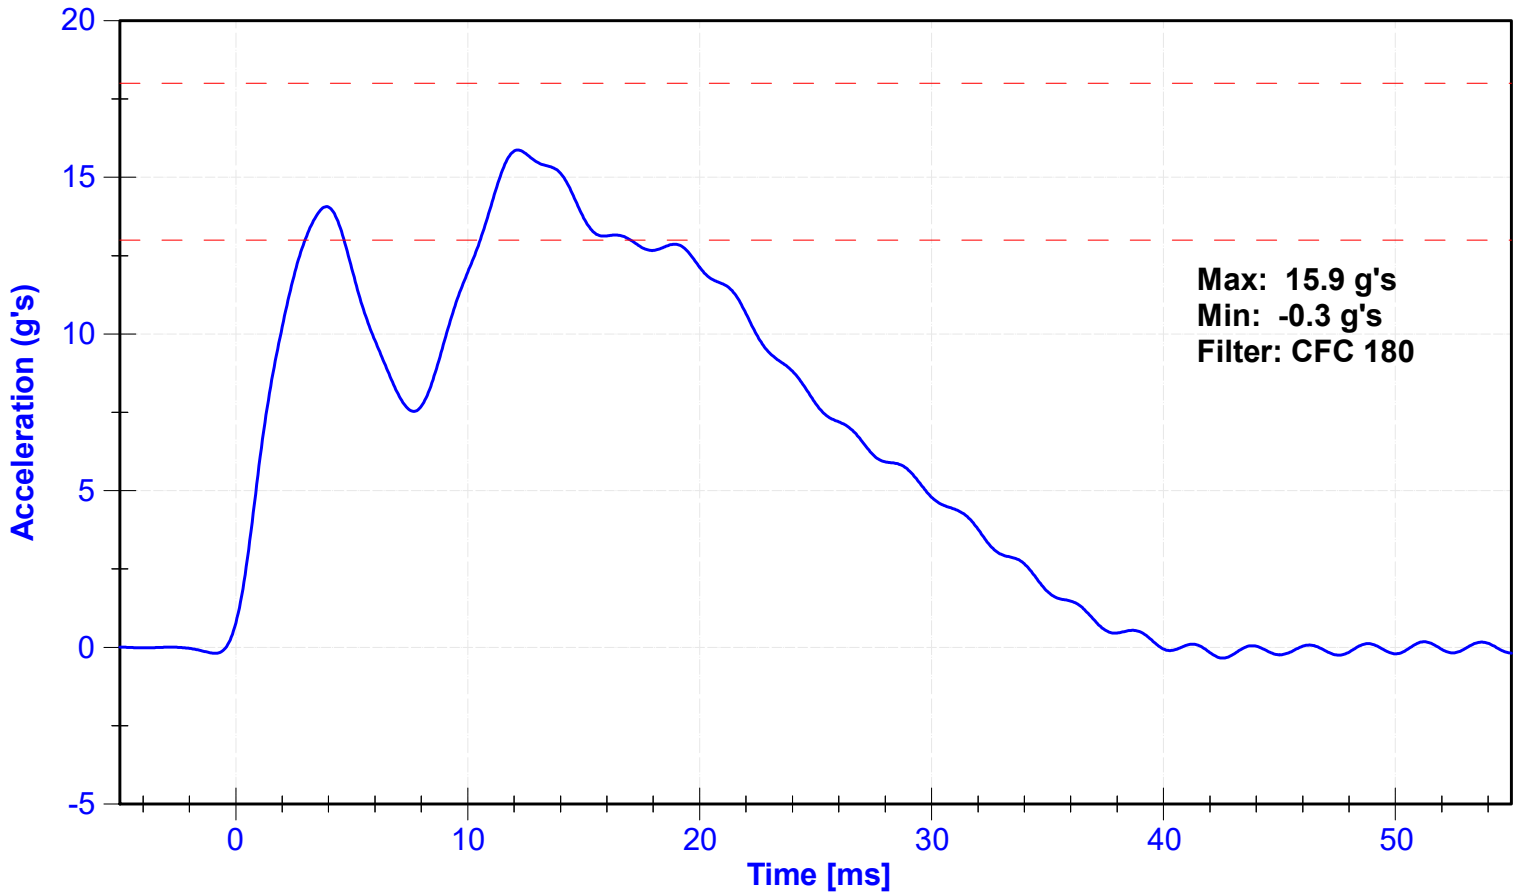

Shoulder Displacement

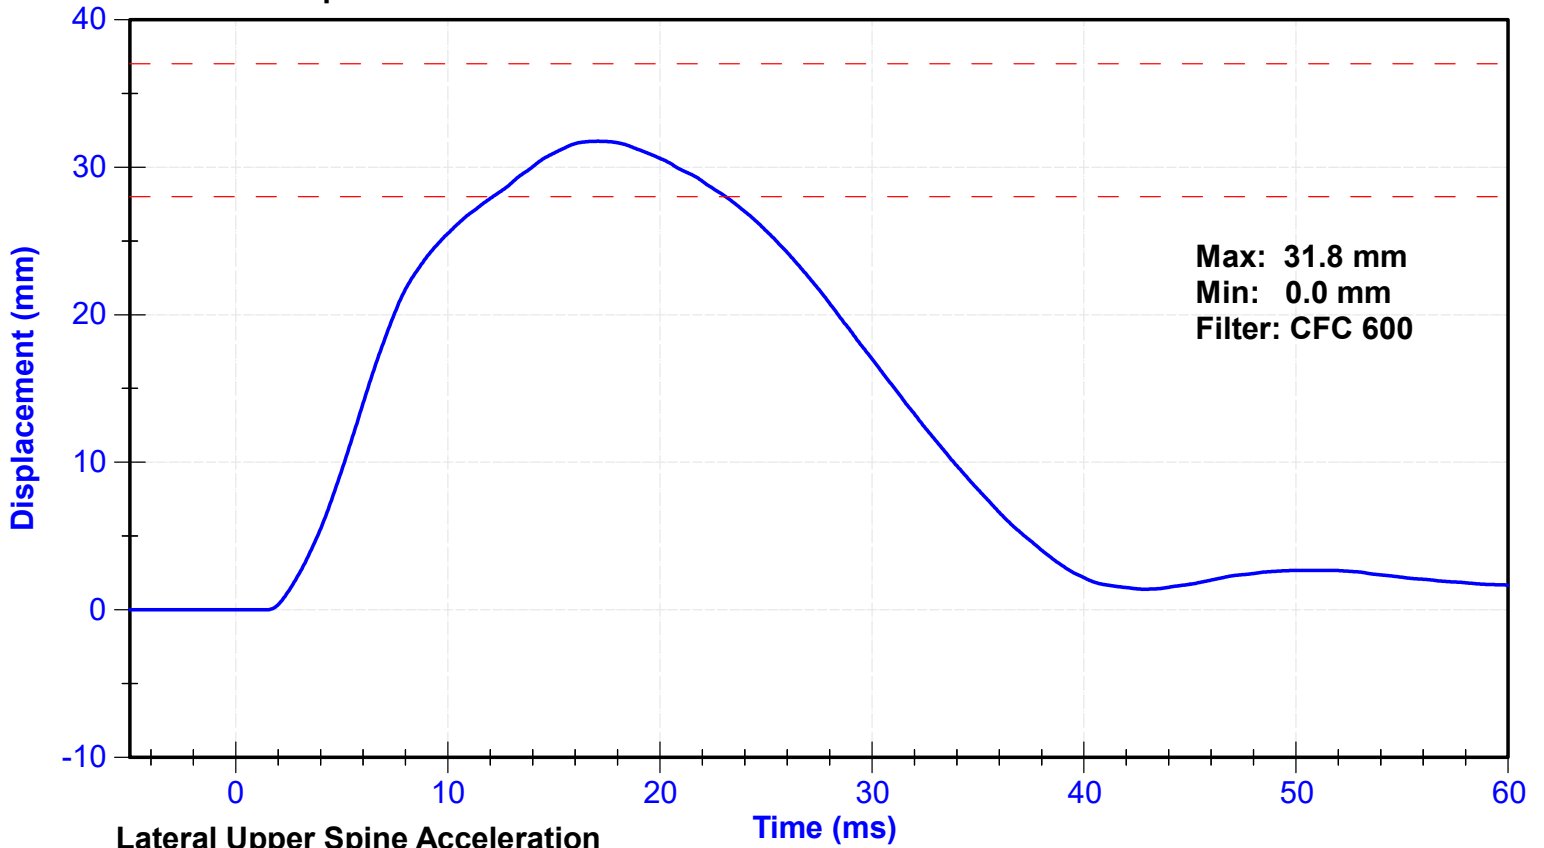

Lateral Upper Spine Acceleration

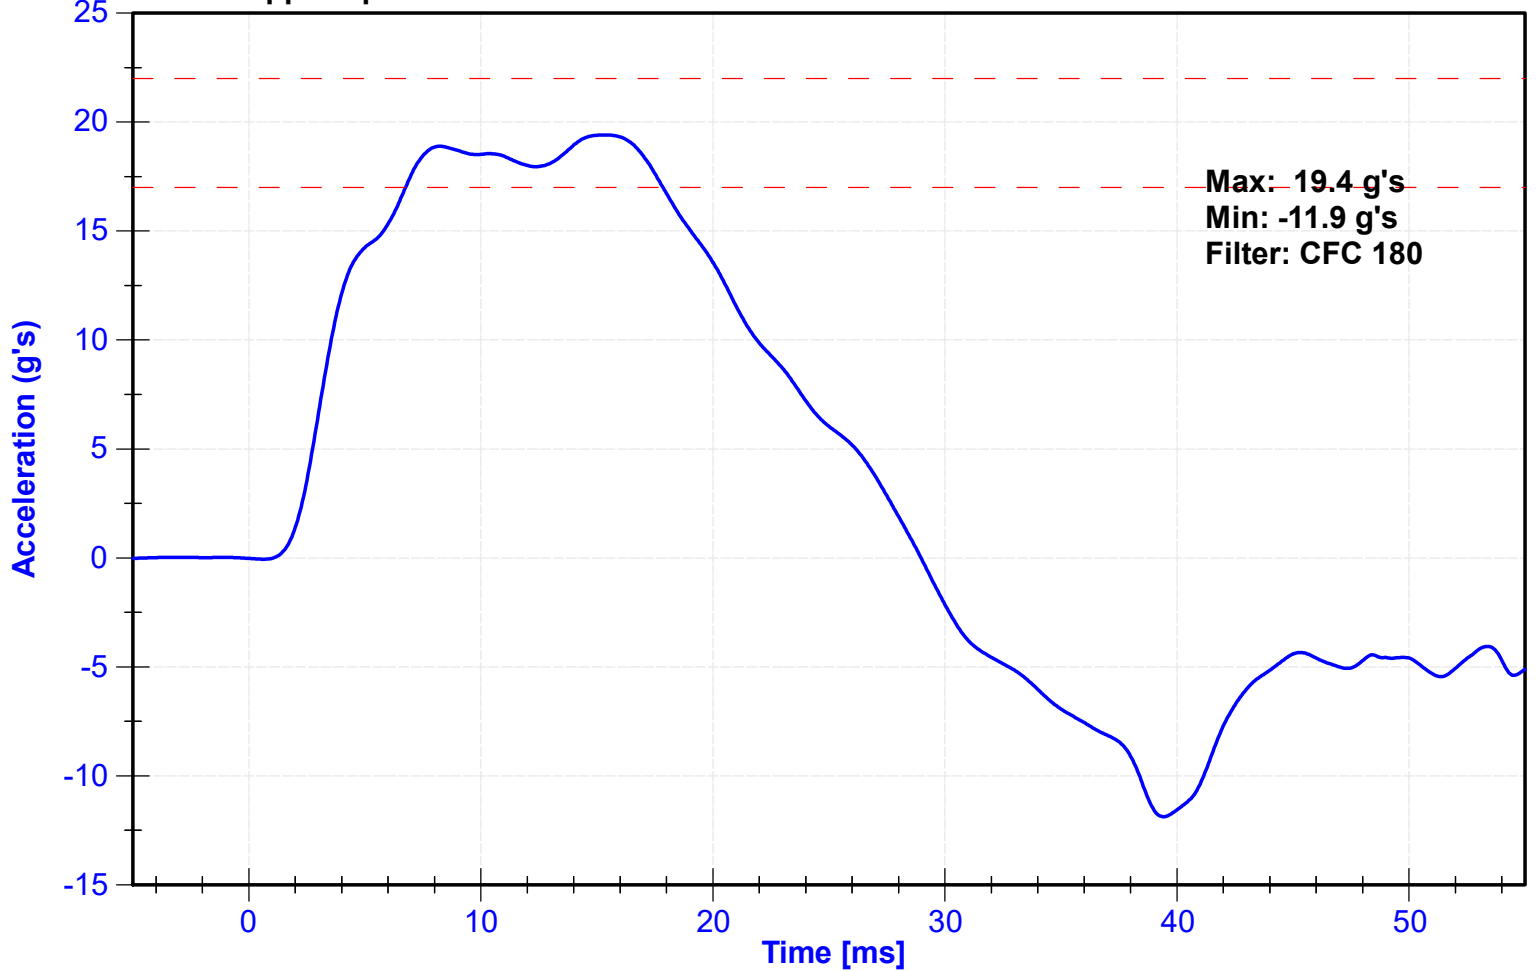


| | | | |
|-------------------|------|-----------------------|-----------|
| ATD Manufacturer | FTSS | Test Technician | D. Kroll |
| ATD Serial Number | 261 | Laboratory Supervisor | K. Brogan |





Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|----------------------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.5 | Pass |
| Humidity | 10 | 70 | % | 30 | Pass |
| Velocity | 6.6 | 6.8 | m/s | 6.65 | Pass |
| Probe Acceleration after 5 ms | 30 | 36 | g's | 33.2 | Pass |
| Lateral Upper Spine Acceleration | 34 | 43 | g's | 40.5 | Pass |
| Lateral Lower Spine Acceleration | 29 | 37 | g's | 31.6 | Pass |
| Shoulder Deflection | 31 | 40 | mm | 35.7 | Pass |
| Upper Thorax Rib Deflection | 25 | 32 | mm | 28.2 | Pass |
| Mid Thorax Rib Deflection | 30 | 36 | mm | 31.2 | Pass |
| Lower Thorax Rib Deflection | 32 | 38 | mm | 33.2 | Pass |


Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------------------------------|--------------|---------------|------------------|----------------------|
| Pendulum Accelerometer | Endevco | P51736 | 10/25/2022 | 4/23/2023 |
| Upper Spine T1 Y Accelerometer | Endevco | P18688 | 10/25/2022 | 4/23/2023 |
| Upper Spine T12 Y Accelerometer | Endevco | P58744 | 10/25/2022 | 4/23/2023 |
| Shoulder Potentiometer | Servo | 572GFE | 11/1/2022 | 5/2/2023 |
| Upper Thorax Rib Potentiometer | Servo | 062GFE | 11/1/2022 | 5/2/2023 |
| Middle Thorax Rib Potentiometer | Servo | 528GFE | 11/1/2022 | 5/2/2023 |
| Lower Thorax Rib Potentiometer | Servo | 513GFE | 11/1/2022 | 5/2/2023 |

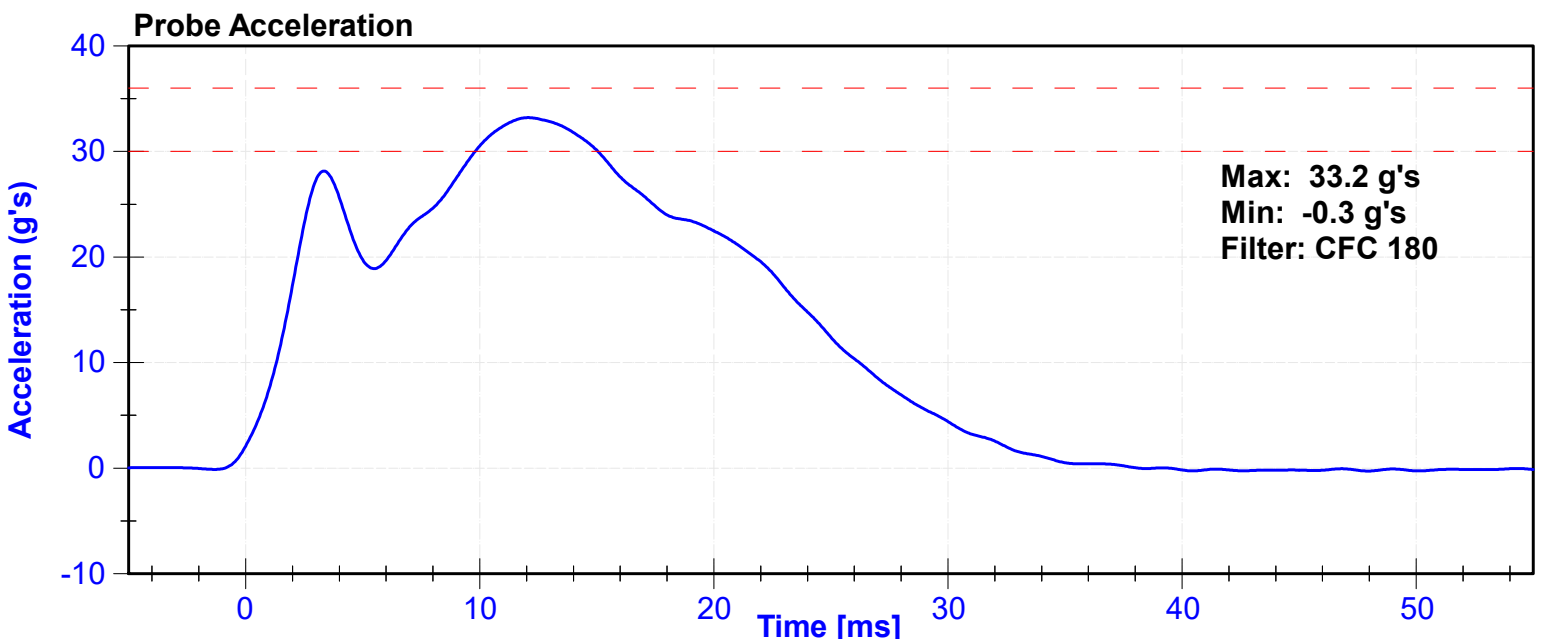


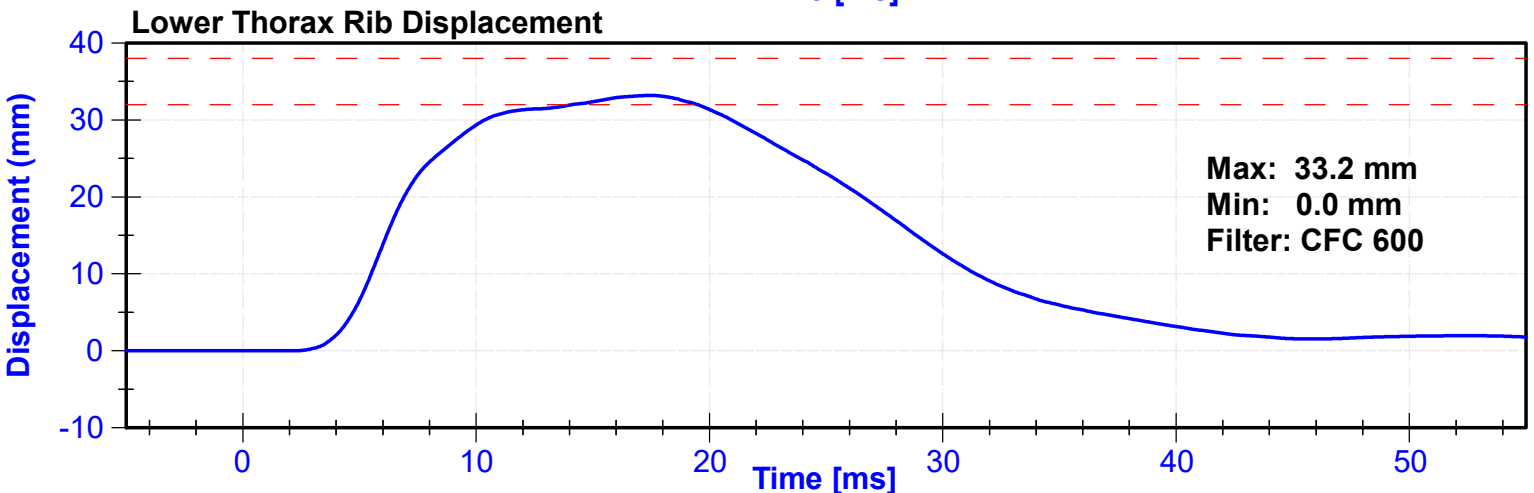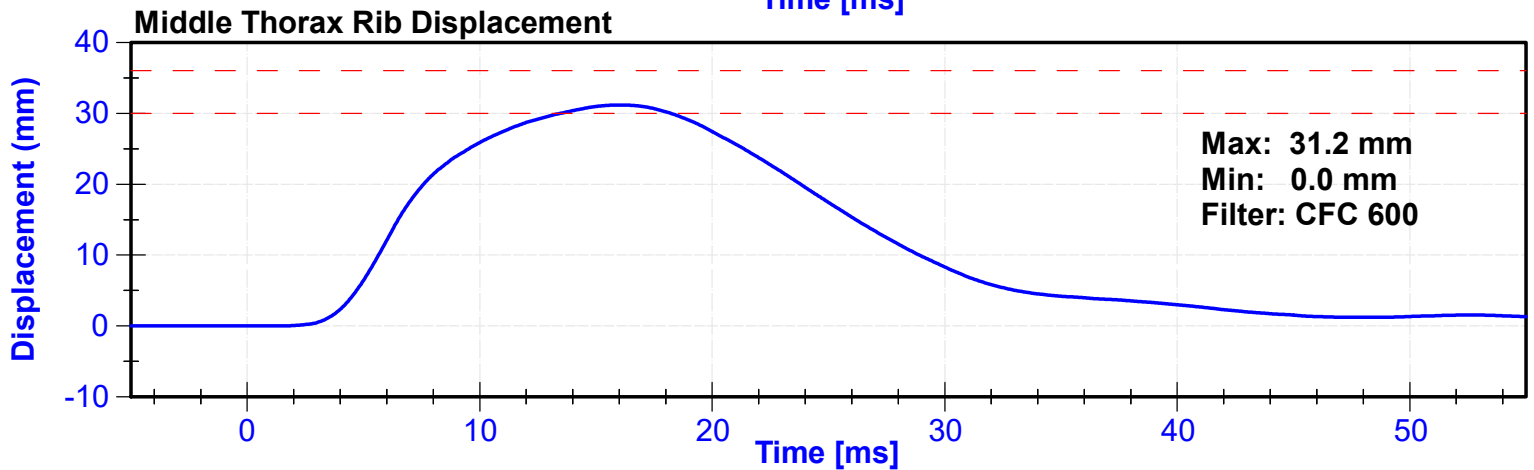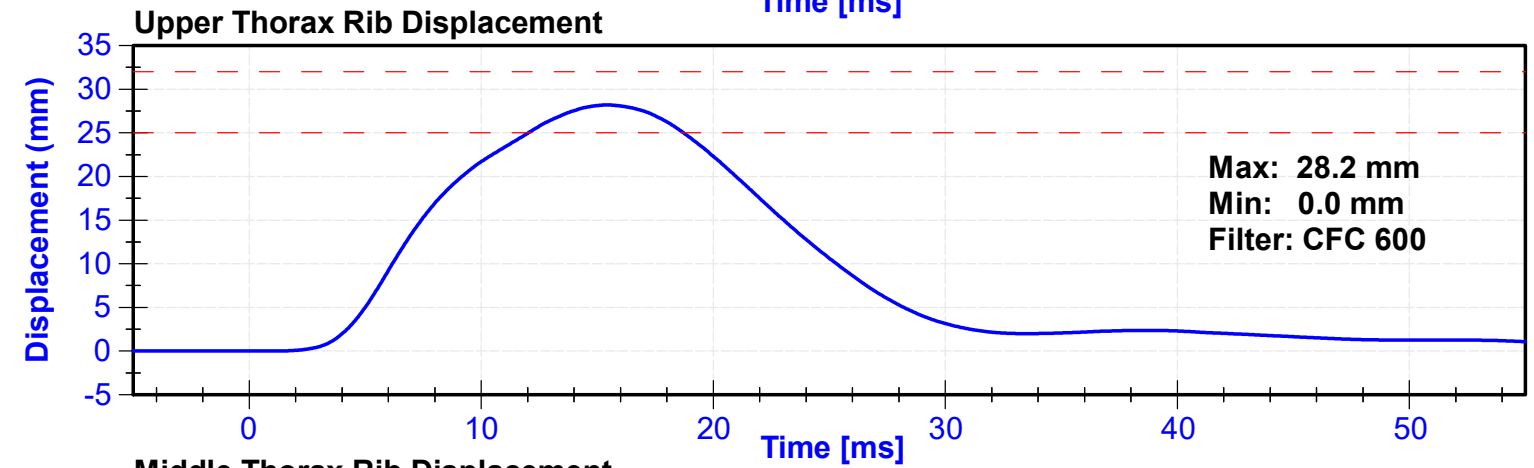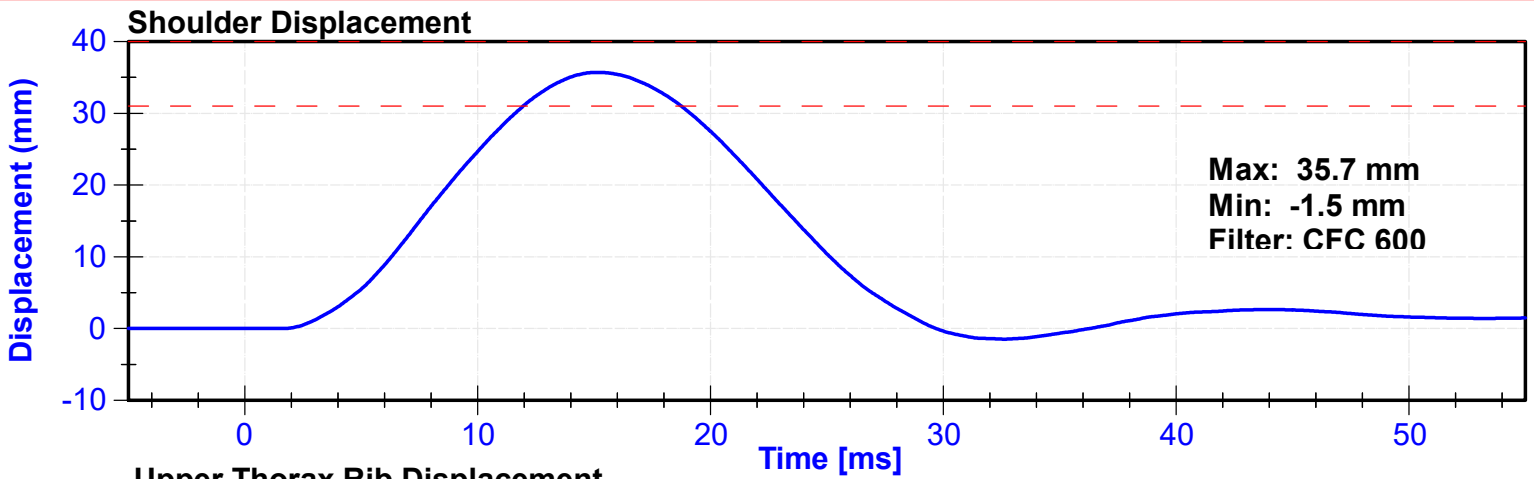

Lateral Upper Spine Acceleration

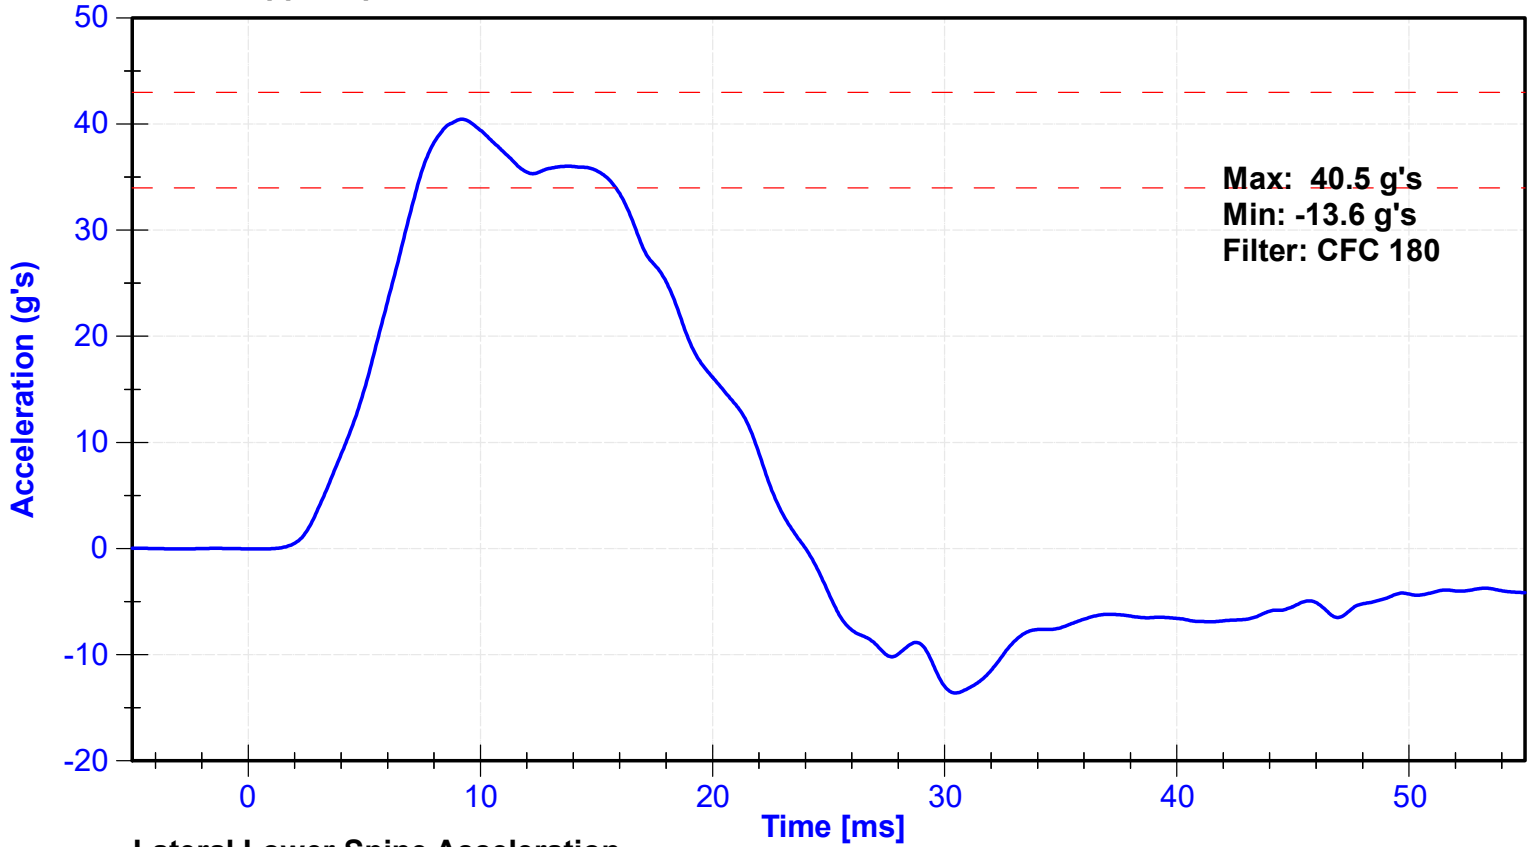

Lateral Lower Spine Acceleration

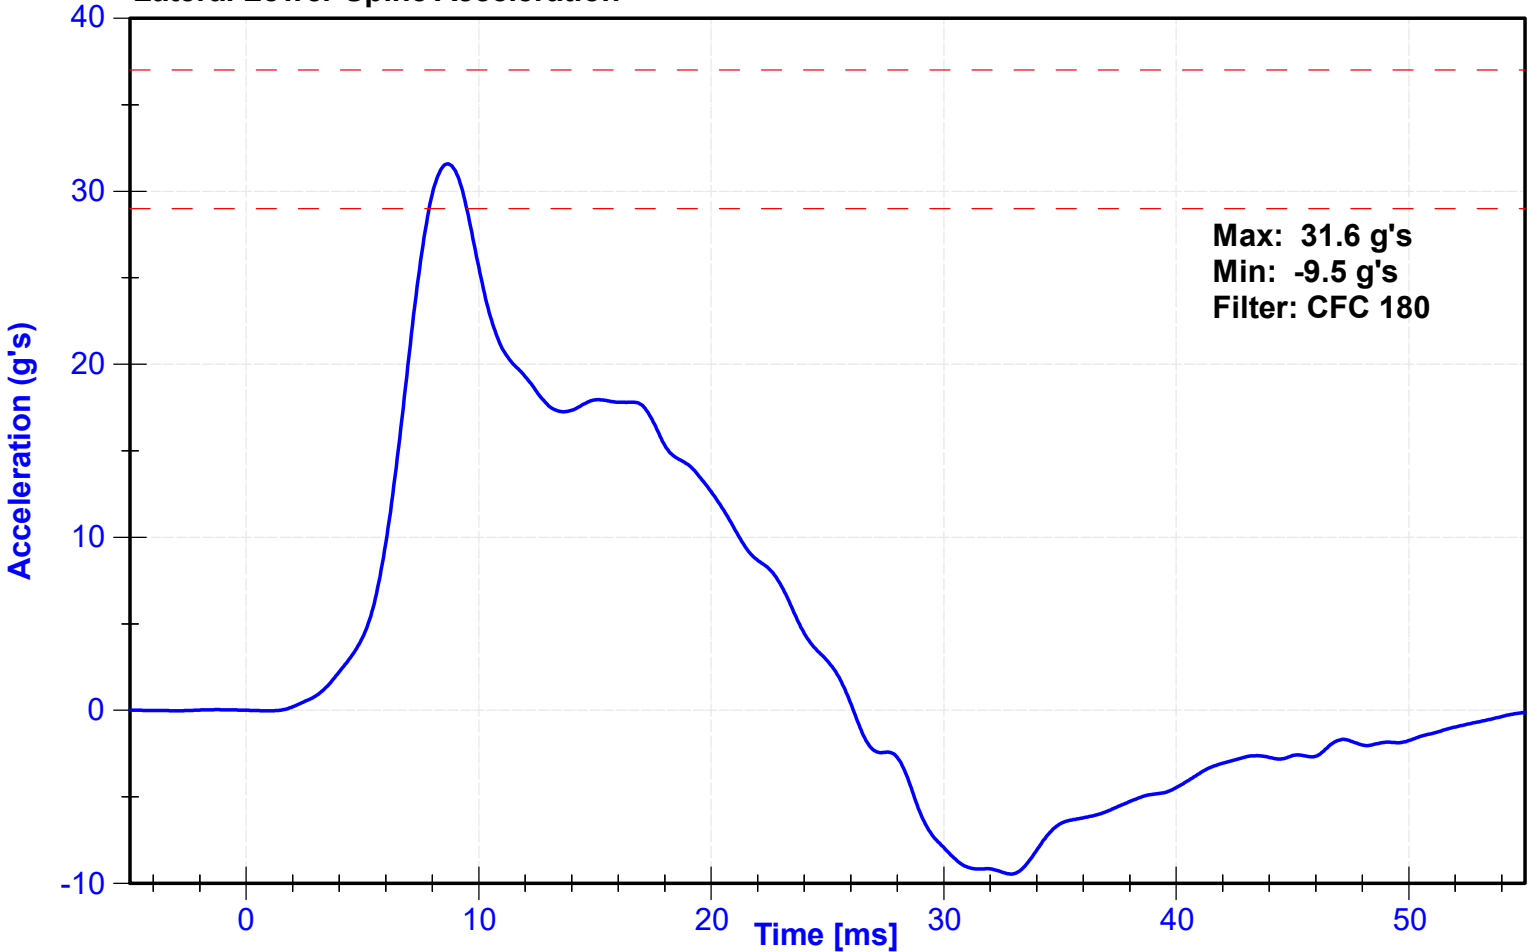


| | | | |
|-------------------|------|-----------------------|-----------|
| ATD Manufacturer | FTSS | Test Technician | D. Kroll |
| ATD Serial Number | 261 | Laboratory Supervisor | K. Brogan |




Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|----------------------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.5 | Pass |
| Humidity | 10 | 70 | % | 20 | Pass |
| Velocity | 4.2 | 4.4 | m/s | 4.35 | Pass |
| Probe Acceleration | 14 | 18 | g's | 17.3 | Pass |
| Lateral Upper Spine Acceleration | 13 | 17 | g's | 16.2 | Pass |
| Lateral Lower Spine Acceleration | 7 | 11 | g's | 10.7 | Pass |
| Upper Thorax Rib Deflection | 32 | 40 | mm | 34.6 | Pass |
| Middle Thorax Rib Deflection | 39 | 45 | mm | 39.3 | Pass |
| Lower Thorax Rib Deflection | 35 | 43 | mm | 36.1 | Pass |


Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------------------------------|--------------|---------------|------------------|----------------------|
| Pendulum Accelerometer | Endevco | P51736 | 10/25/2022 | 4/23/2023 |
| Upper Spine Y Accelerometer | Endevco | P18688 | 10/25/2022 | 4/23/2023 |
| Lower Spine Y Accelerometer | Endevco | P58744 | 10/25/2022 | 4/23/2023 |
| Upper Thorax Rib Potentiometer | Servo | 062GFE | 11/1/2022 | 5/2/2023 |
| Middle Thorax Rib Potentiometer | Servo | 528GFE | 11/1/2022 | 5/2/2023 |
| Lower Thorax Rib Potentiometer | Servo | 513GFE | 11/1/2022 | 5/2/2023 |

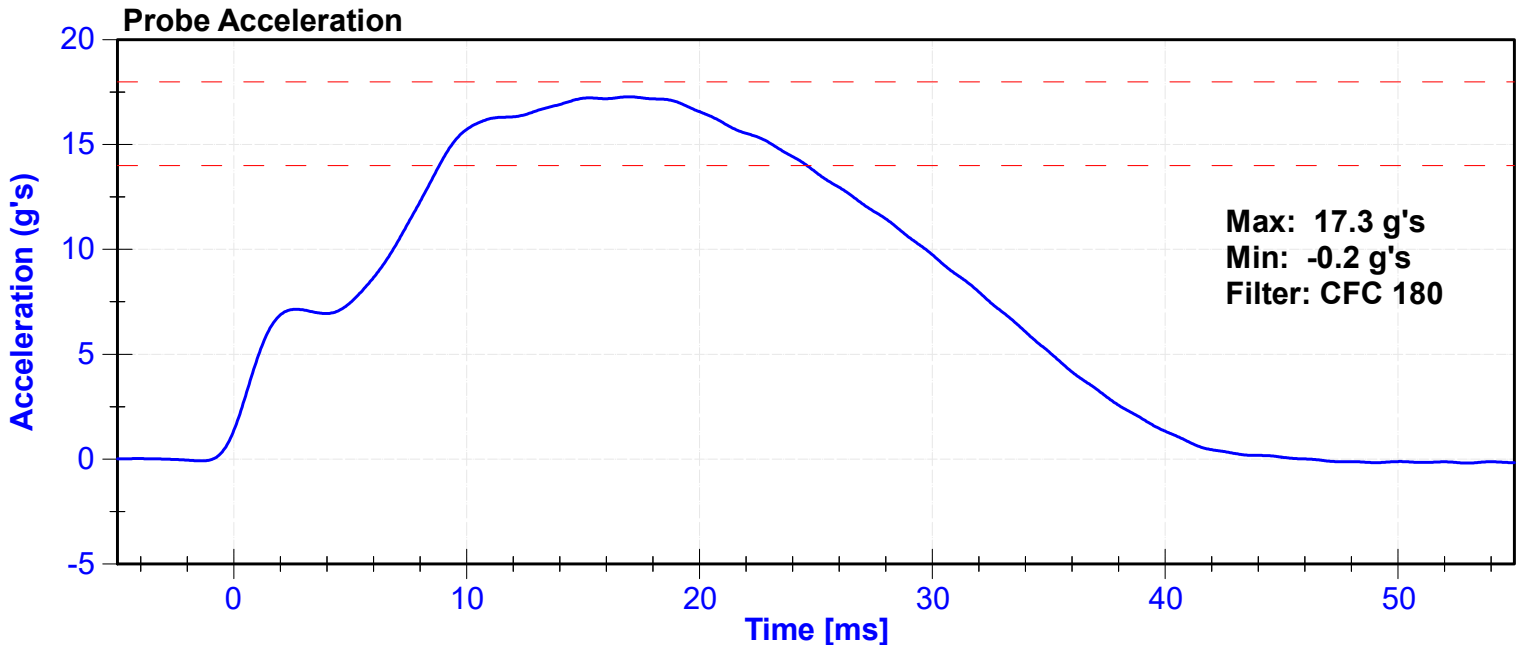


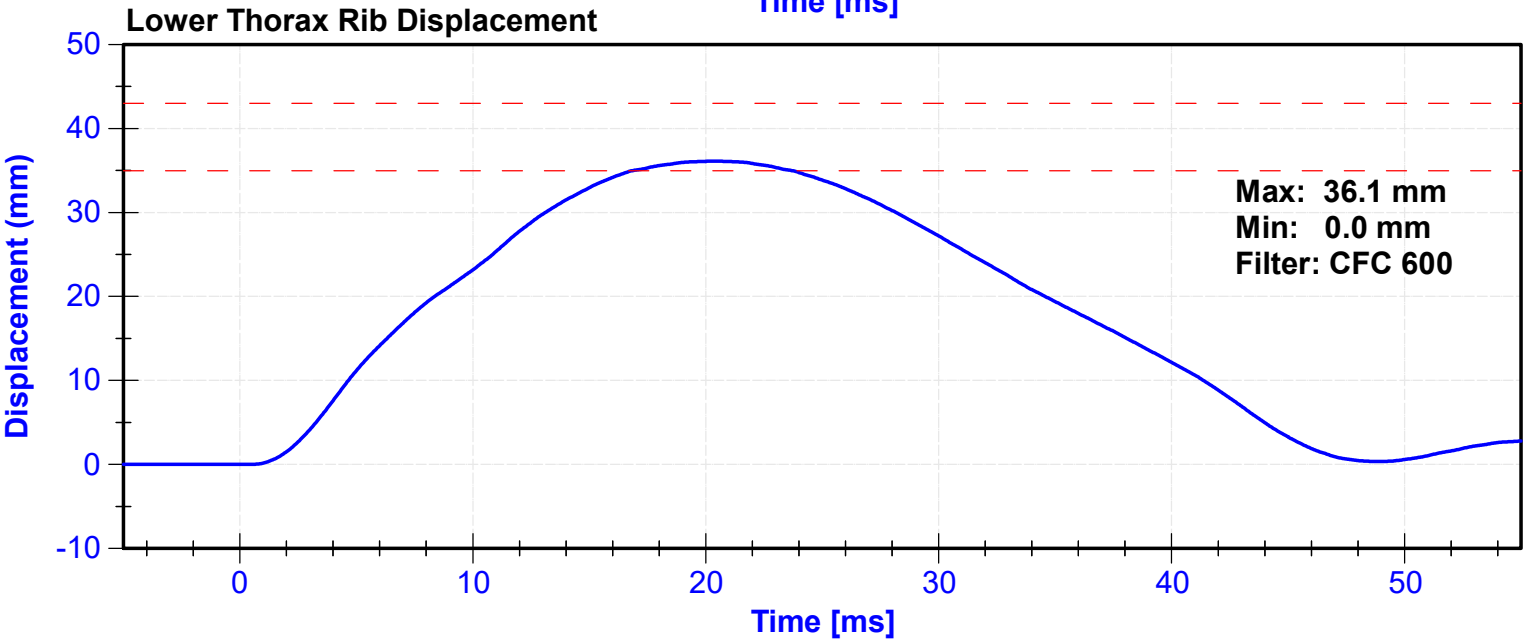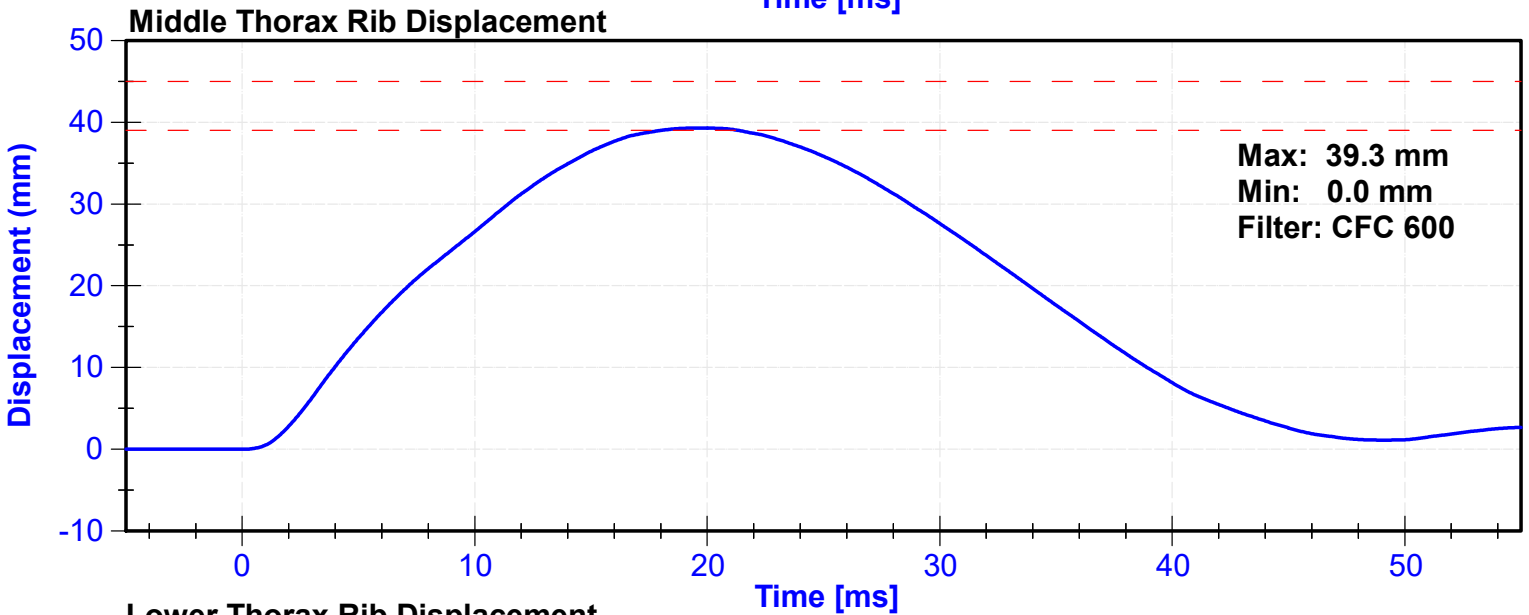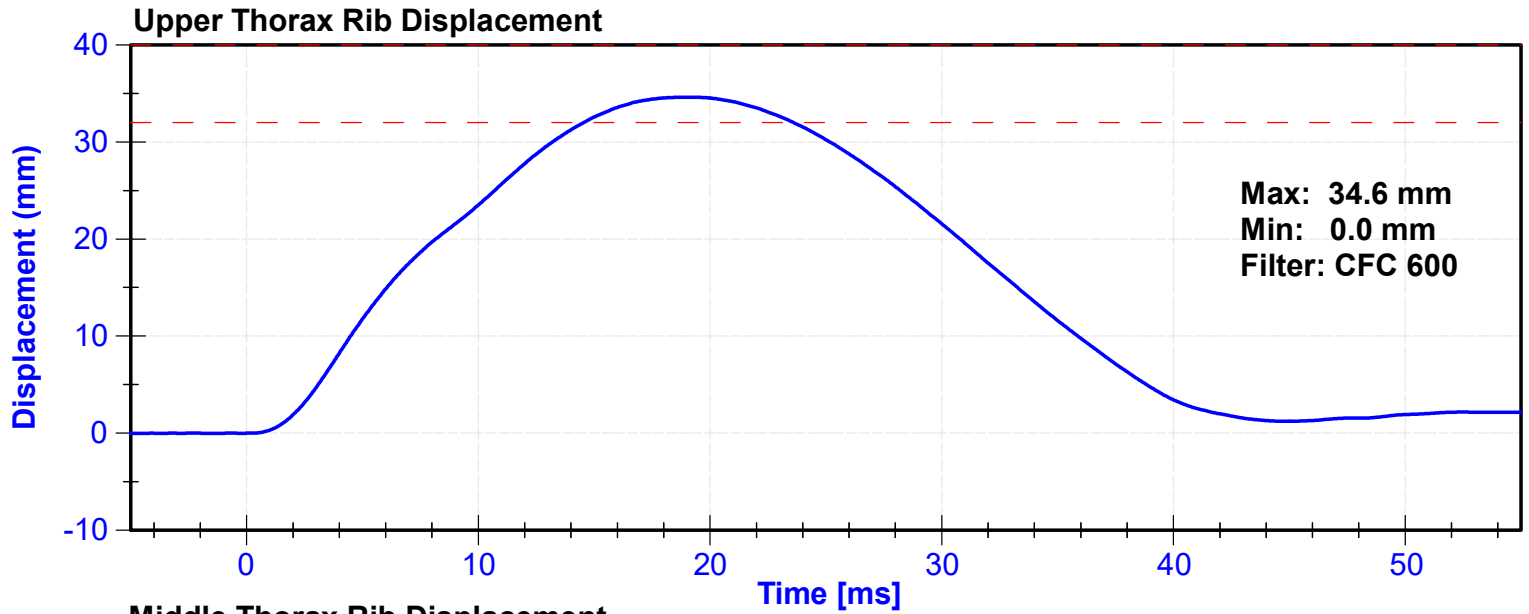

Lateral Upper Spine Acceleration

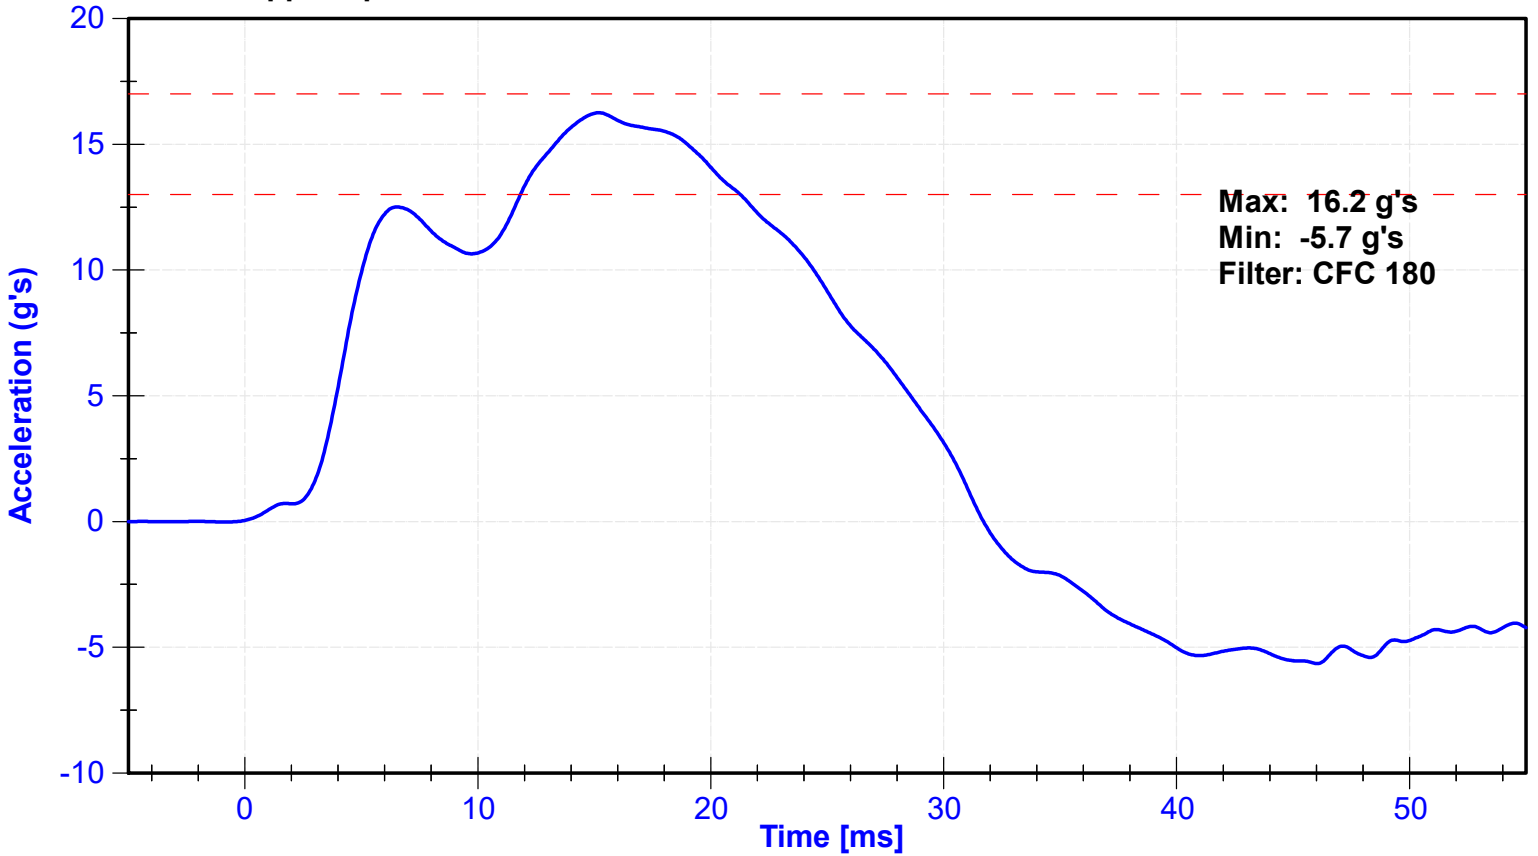

Lateral Lower Spine Acceleration

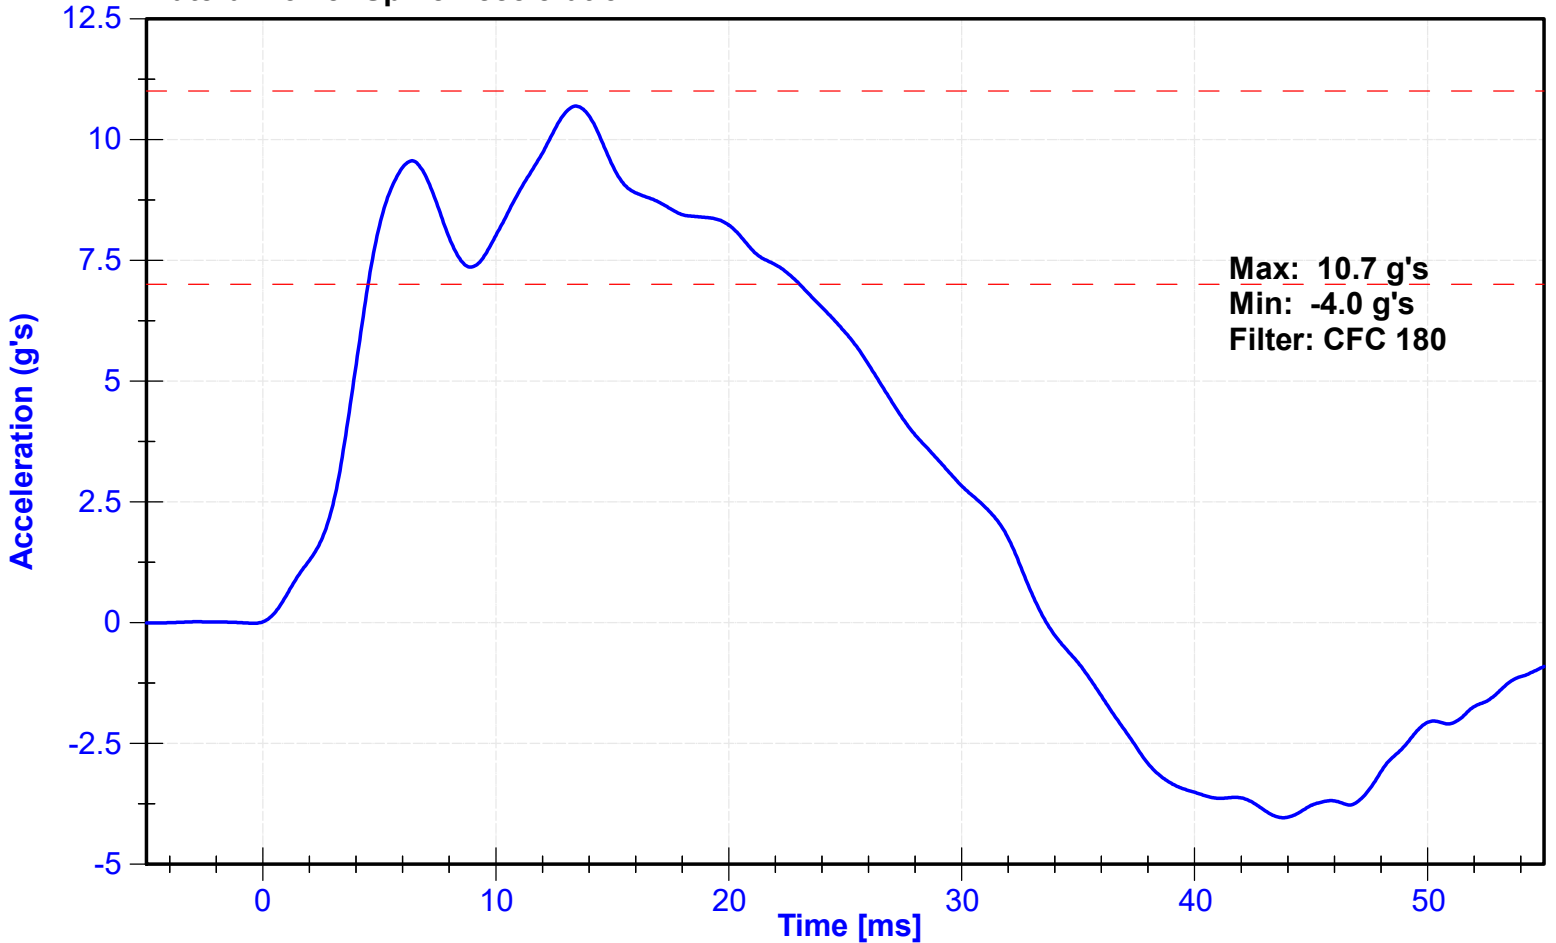

| | | | |
|-------------------|------|-----------------------|-----------|
| ATD Manufacturer | FTSS | Test Technician | D. Kroll |
| ATD Serial Number | 261 | Laboratory Supervisor | K. Brogan |


Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|----------------------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21 | Pass |
| Humidity | 10 | 70 | % | 20 | Pass |
| Velocity | 4.2 | 4.4 | m/s | 4.30 | Pass |
| Probe Acceleration | 12 | 16 | g's | 14.3 | Pass |
| Lateral Lower Spine Acceleration | 9 | 14 | g's | 10.7 | Pass |
| Upper Abdomen Rib Deflection | 36 | 47 | mm | 39.8 | Pass |
| Lower Abdomen Rib Deflection | 33 | 44 | mm | 39.0 | Pass |


Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|---------------------------------|--------------|---------------|------------------|----------------------|
| Probe Accelerometer | Endevco | P51736 | 10/25/2022 | 4/23/2023 |
| Lower Spine Y Accelerometer | Endevco | P58744 | 10/25/2022 | 4/23/2023 |
| Upper Abdomen Rib Potentiometer | Servo | 342GFE | 11/1/2022 | 5/2/2023 |
| Lower Abdomen Rib Potentiometer | Servo | 512GFE | 11/1/2022 | 5/2/2023 |


Probe Acceleration

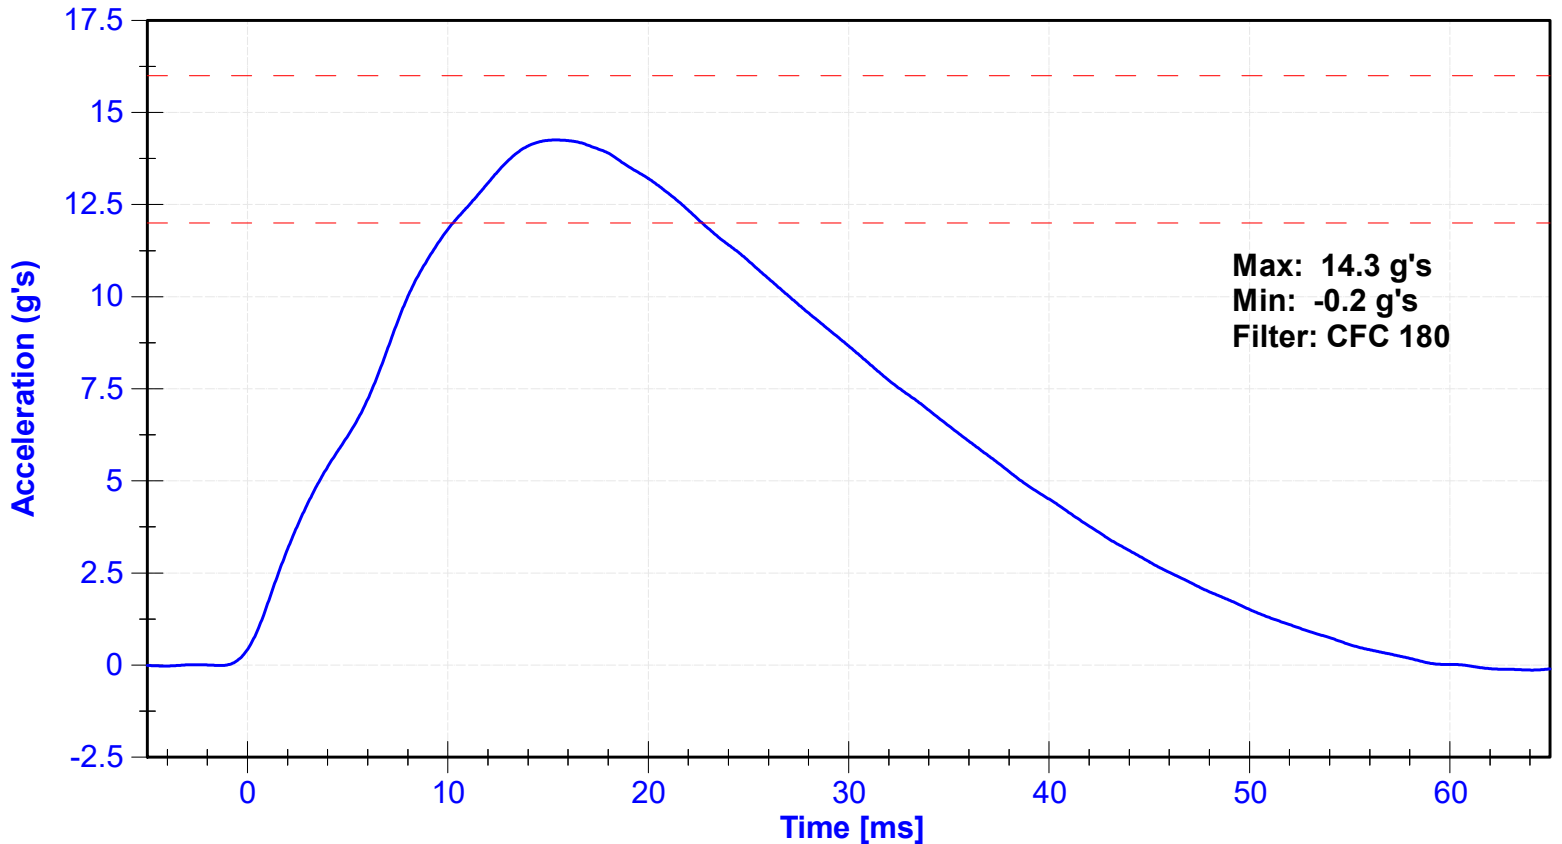


Upper Abdomen Rib Displacement

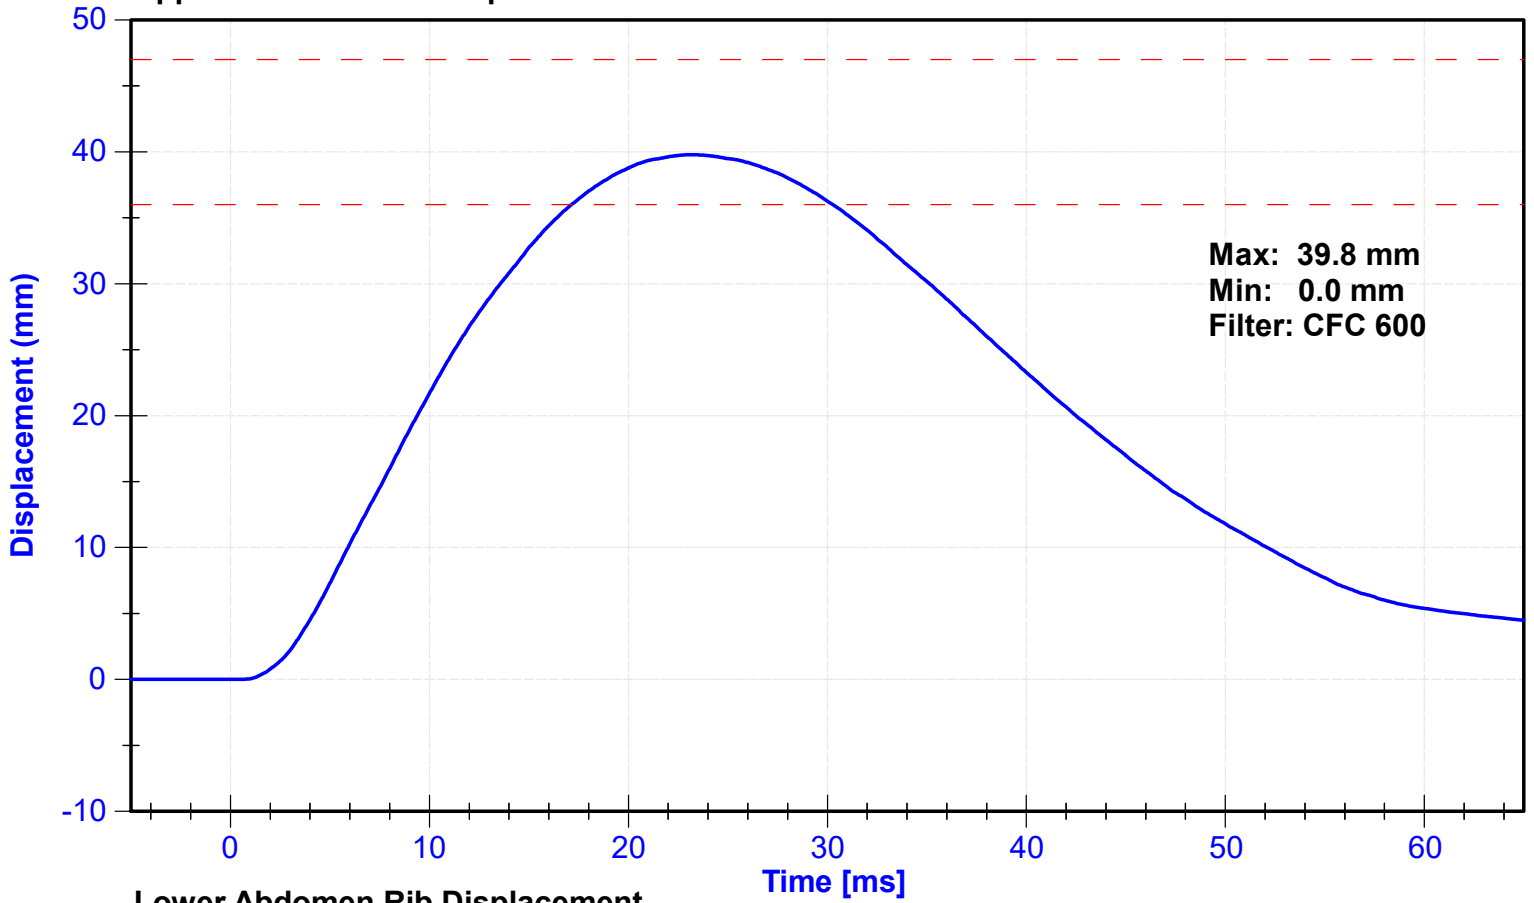

Lower Abdomen Rib Displacement

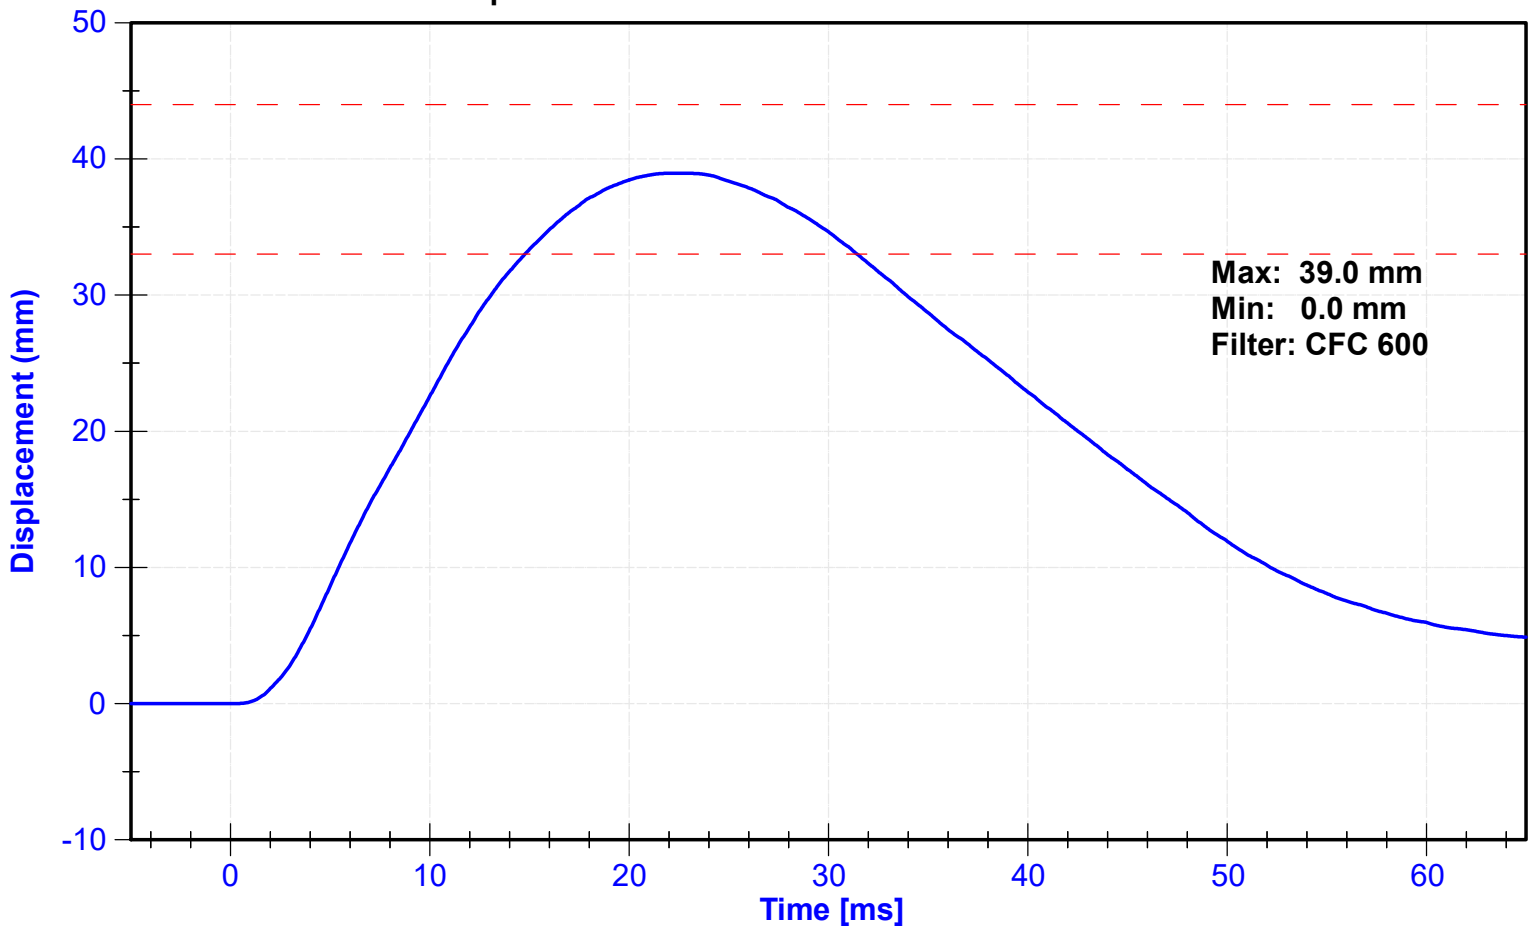

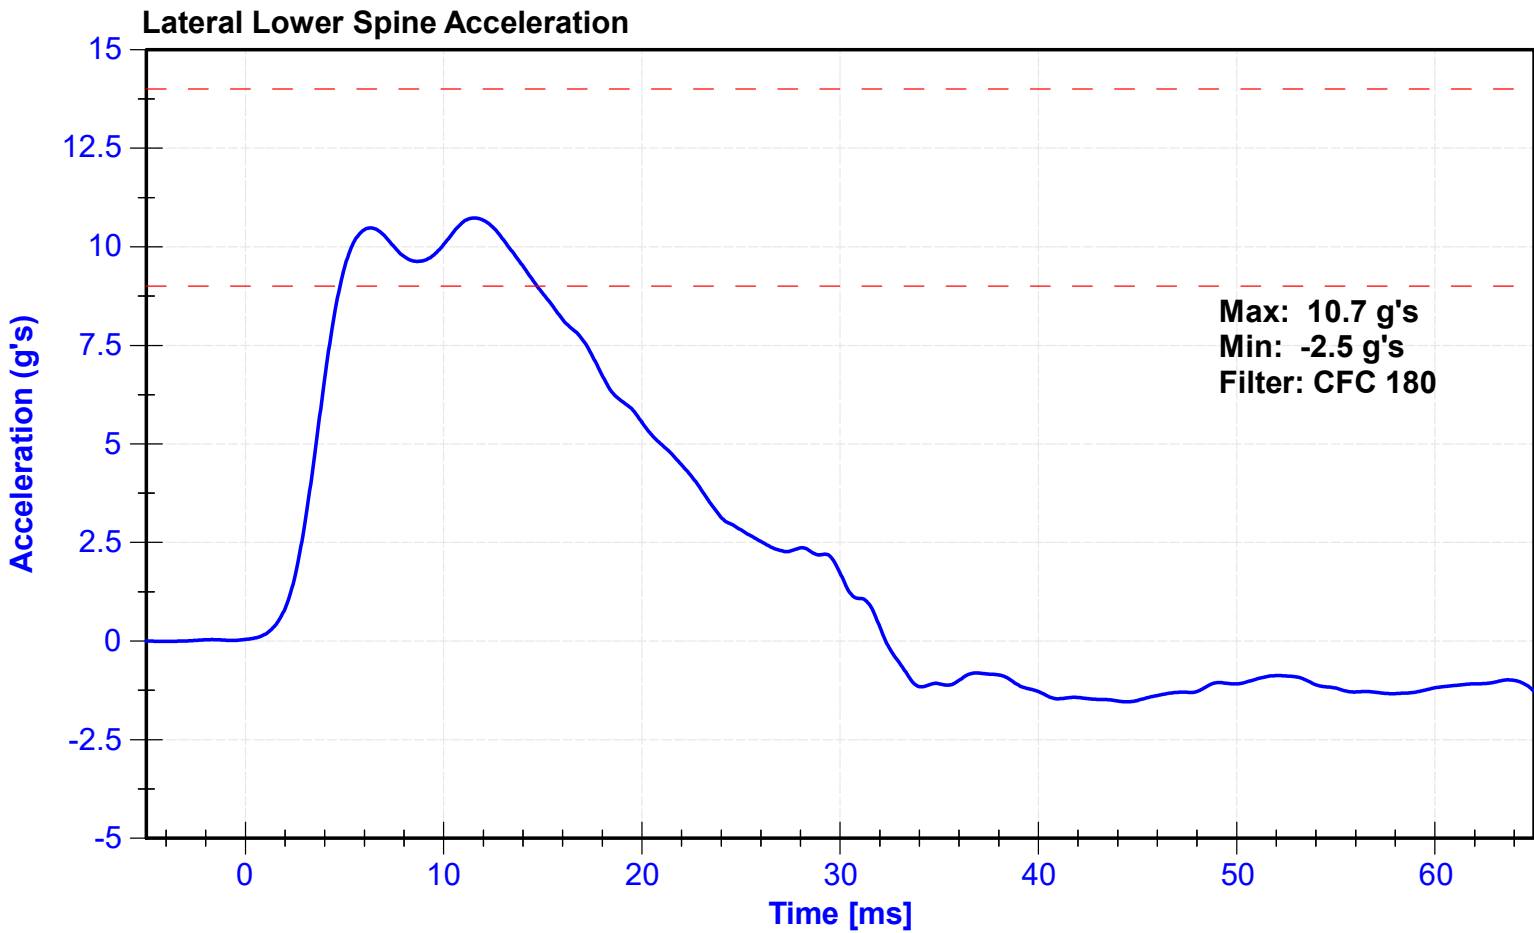

| | | | |
|-------------------|------|-----------------------|-----------|
| ATD Manufacturer | FTSS | Test Technician | d kroll |
| ATD Serial Number | 261 | Laboratory Supervisor | K. Brogan |


Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|---------------------------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.5 | Pass |
| Humidity | 10 | 70 | % | 20 | Pass |
| Velocity | 6.6 | 6.8 | m/s | 6.65 | Pass |
| Probe Acceleration | 38 | 47 | g's | 46.2 | Pass |
| Lateral Pelvis Acceleration after 6ms | 34 | 42 | g's | 41.0 | Pass |
| Acetabulum Force | 3600 | 4300 | N | 4196.5 | Pass |


Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|------------------------|--------------|---------------|------------------|----------------------|
| Pendulum Accelerometer | Endevco | P51736 | 10/25/2022 | 4/23/2023 |
| Pelvis Y Accelerometer | Endevco | P94678 | 10/25/2022 | 4/23/2023 |
| Acetabulum Load Cell | Denton | 275-FY | 8/11/2022 | 8/11/2023 |
| Certification Plug | SACO | | | N/A |
| Crash Test Plug | SACO | | | N/A |


Probe Acceleration

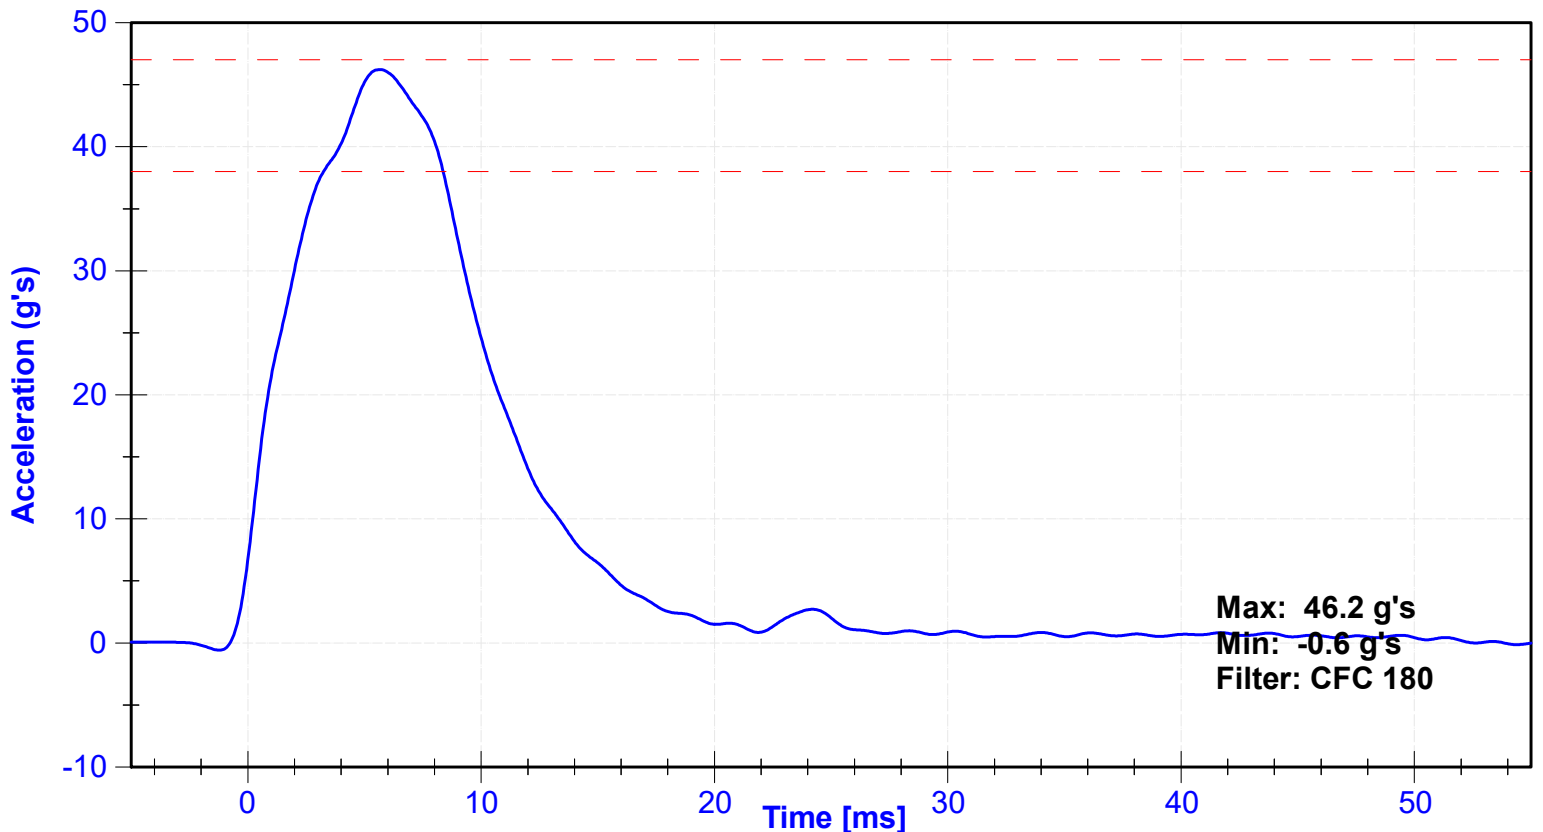

Lateral Pelvis Acceleration

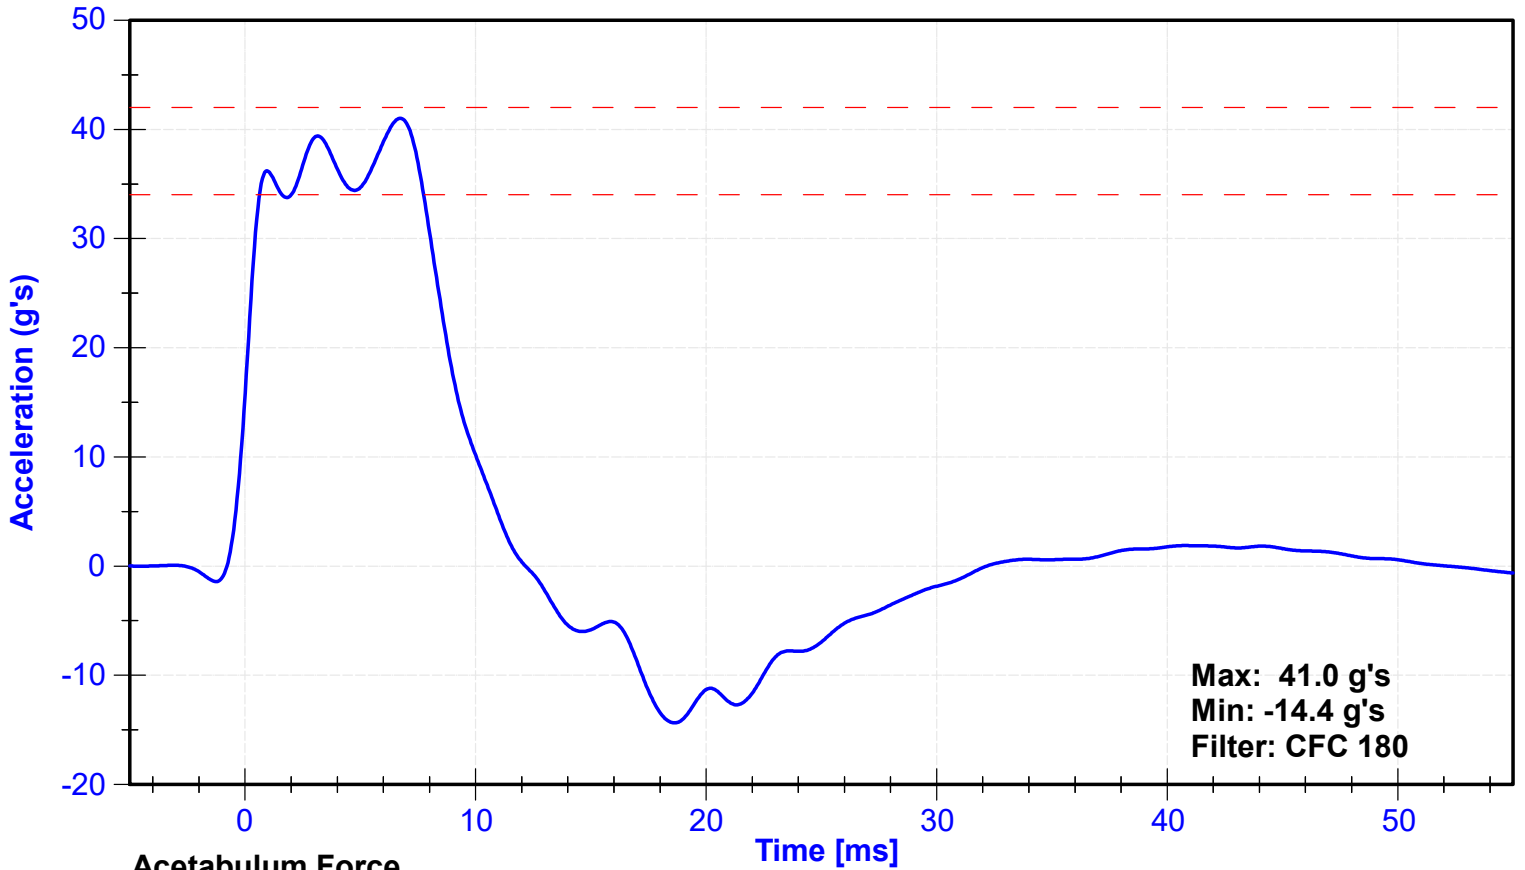

Acetabulum Force

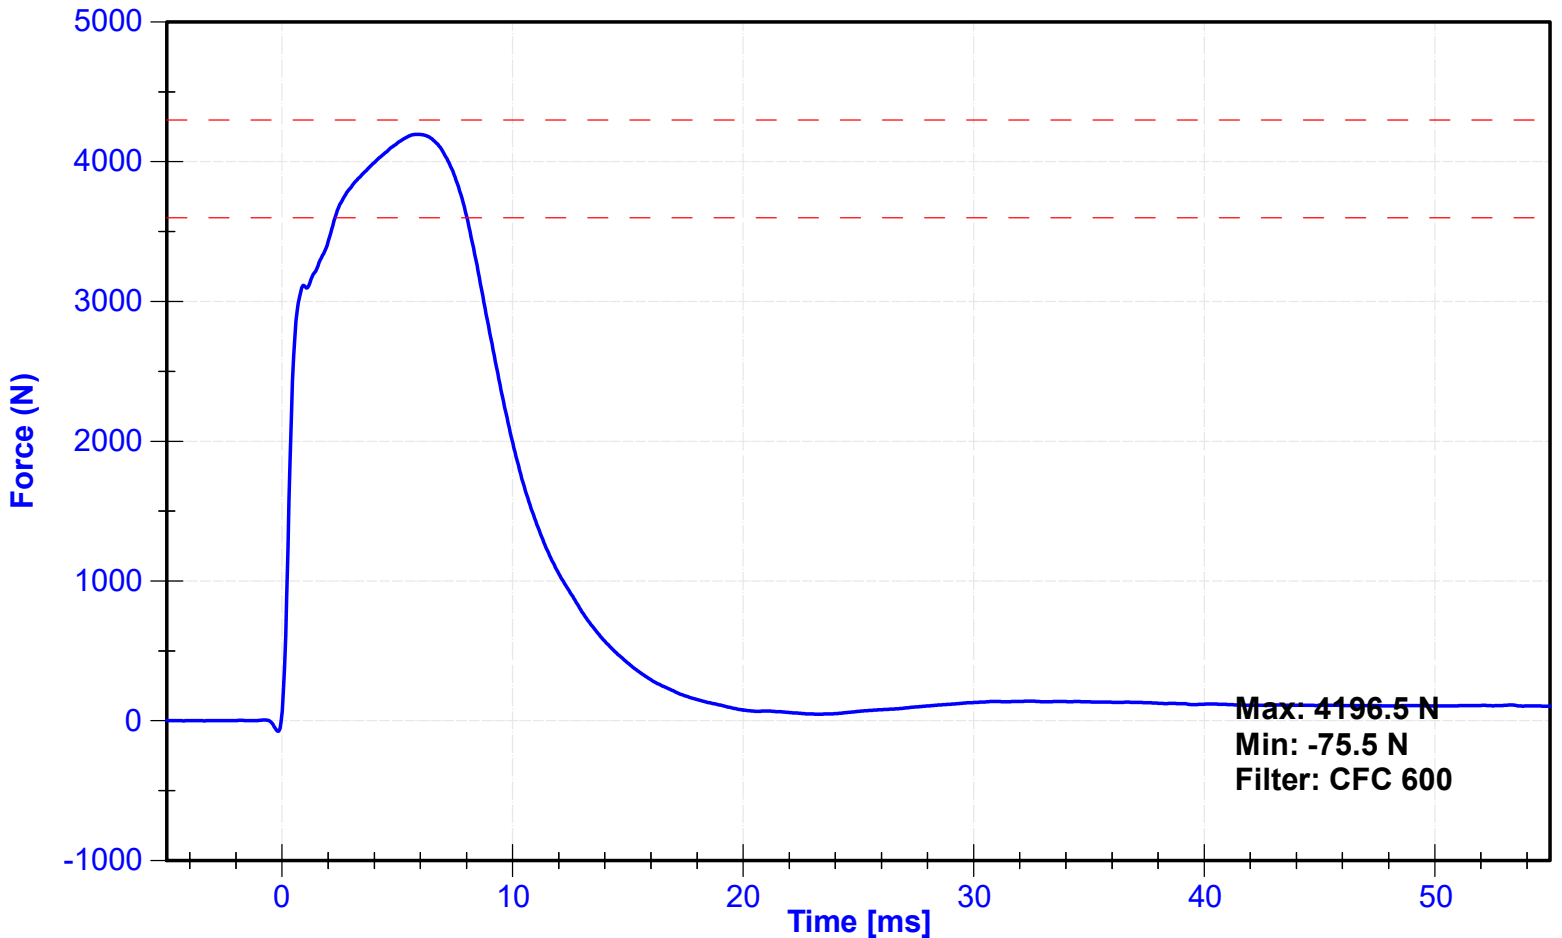



cost 201 11/28

SID-IIs Pelvis Plug Certification Test

Plug S/N 15464
 Test Number 20183
 Report Number 20237


Test Date 9/22/2021 8:00:12 AM

| Test Results | Spec Min | Spec Max |
|--------------------|----------|----------|
| Force @ 0.5 mm (N) | 50 | 600 |
| Force @ 1.5 mm (N) | 850 | 1,400 |
| Force @ 2.5 mm (N) | 1,306 | 1,618 |
| Force @ 3.0 mm (N) | 1,361 | 1,673 |

Testing Machine STM-20 5965542
 Load Cell S/N (F1360947), Units (LBS) 1000
 Crosshead Speed (mm / min) or Rate 12.7
 Extension or Position Measured by XHD_100 (XHD100)

Notes:

Force (-N) vs Extension (-mm)

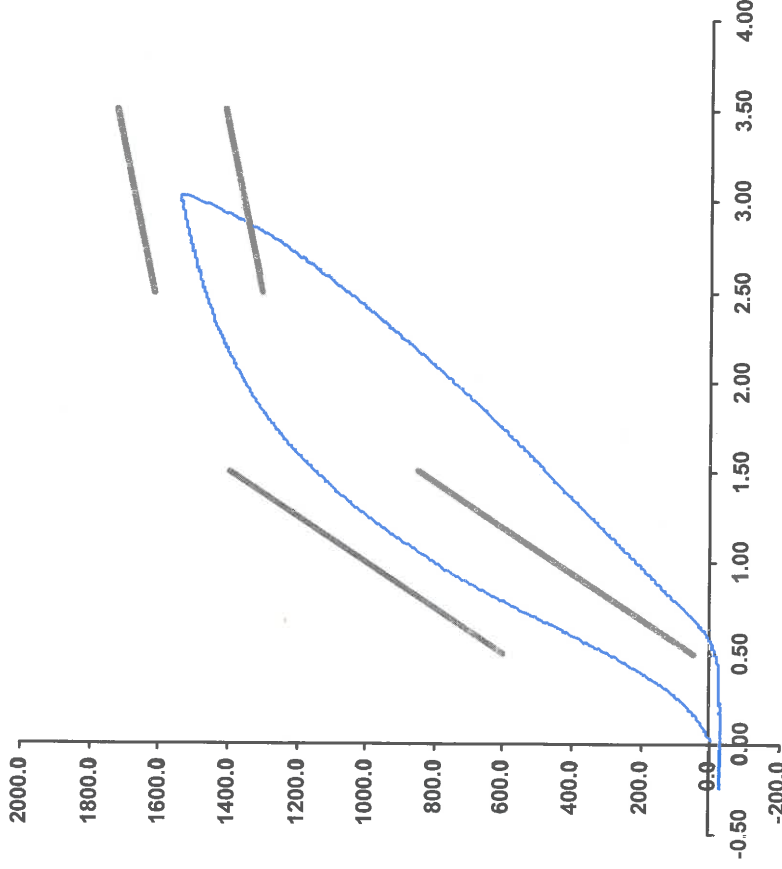

Operator _____
 Part Number 180-4450

Template No 107 22-Sep-21
 SACO Research

By: DC Date: 9/22/2021
 SACO Research 41735 Elm St, #401 Murrieta, CA 92562 Tel 310-694-2082 Fax 310-694-2082



CRASH 11-28-2022
~~261~~

SID-IIs Pelvis Plug Certification Test

Plug S/N 15131
 Test Number 17843
 Report Number 17892


Test Date 3/5/2021 10:14:07 AM

| Test Results | Spec Min | Spec Max |
|--------------------|----------|----------|
| Force @ 0.5 mm (N) | 50 | 600 |
| Force @ 1.5 mm (N) | 850 | 1,400 |
| Force @ 2.5 mm (N) | 1,306 | 1,618 |
| Force @ 3.0 mm (N) | 1,361 | 1,673 |

Testing Machine STM-20 5965542
 Load Cell S/N (F1360947), Units (LBS) 1000
 Crosshead Speed (mm / min) or Rate 12.7
 Extension or Position Measured by XHD_100 (XHD100)

Notes:

Force (-N) vs Extension (-mm)

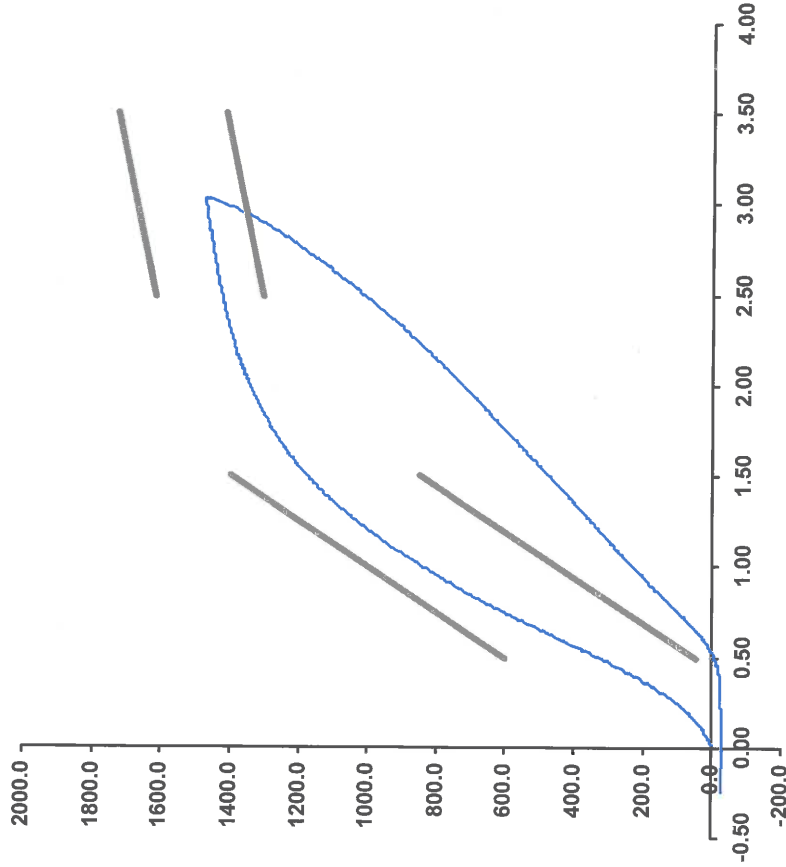

Operator
 Part Number 180-4450

Template No 107 05-Mar-21
 SACO Research

By: *DX* Date: *3/5/2021*
 SACO Research 41735 Elm St, #401 Murrieta, CA 92562 Tel 310-694-2082 Fax



NON-IMPACT

11-28-2022

261

SID-Ils Pelvis Plug Certification Test

Plug S/N 15338

Test Number 19685

Report Number 19737


Test Date 7/20/2021 11:51:24 AM

| Test Results | Spec Min | Spec Max |
|--------------------|----------|----------|
| Force @ 0.5 mm (N) | 50 | 600 |
| Force @ 1.5 mm (N) | 850 | 1,400 |
| Force @ 2.5 mm (N) | 1,306 | 1,618 |
| Force @ 3.0 mm (N) | 1,361 | 1,673 |

Testing Machine STM-20 5965542
 Load Cell S/N (F1360947), Units (LBS) 1000
 Crosshead Speed (mm / min) or Rate 12.7
 Extension or Position Measured by XHD_100 (XHD100)

Notes:

Force (-N) vs Extension (-mm)

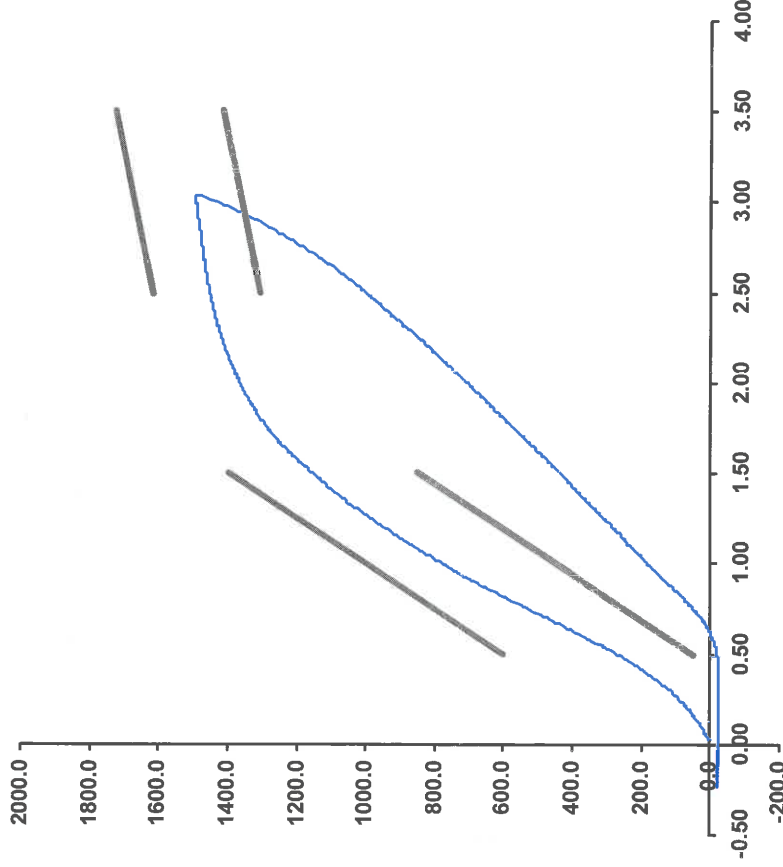

Operator
 Part Number 180-4450

Template No 107 20-Jul-21
 SACO Research

By: *DR* Date: 7/20/2021

SACO Research 41735 Elm St, #401 Murrieta, CA 92562 Tel 310-694-2082 Fax

| | | | |
|-------------------|------|-----------------------|-----------|
| ATD Manufacturer | FTSS | Test Technician | D. Kroll |
| ATD Serial Number | 261 | Laboratory Supervisor | K. Brogan |


Results

| Test Parameter | Minimum Specification | Maximum Specification | Unit | Result | Pass/Fail |
|-----------------------------|-----------------------|-----------------------|------|--------|-----------|
| Temperature | 20.6 | 22.2 | °C | 21.5 | Pass |
| Humidity | 10 | 70 | % | 20 | Pass |
| Velocity | 4.2 | 4.4 | m/s | 4.36 | Pass |
| Probe Acceleration | 36 | 45 | g's | 43.1 | Pass |
| Lateral Pelvis Acceleration | 28 | 39 | g's | 33.4 | Pass |
| Iliac Force | 4100 | 5100 | N | 4776.0 | Pass |


Transducer Calibrations

| Channel | Manufacturer | Serial Number | Calibration Date | Calibration Due Date |
|------------------------|--------------|---------------|------------------|----------------------|
| Pendulum Accelerometer | Endevco | P51736 | 10/25/2022 | 4/23/2023 |
| Pelvis Y Accelerometer | Endevco | P94678 | 10/25/2022 | 4/23/2023 |
| Iliac Load Cell | Denton | 279-FY | 8/11/2022 | 8/11/2023 |


Probe Acceleration

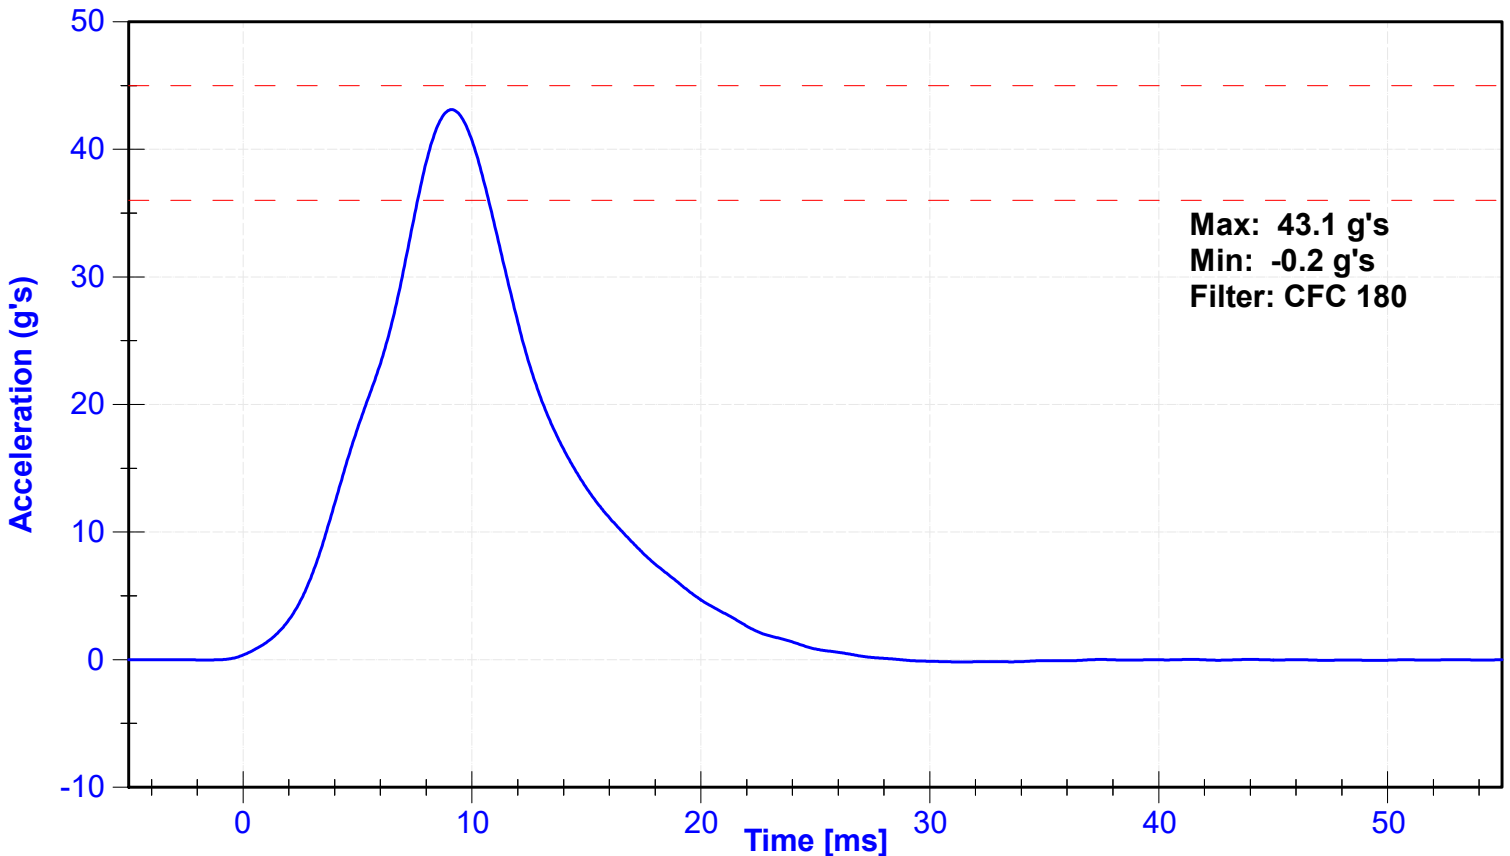

Lateral Pelvis Acceleration

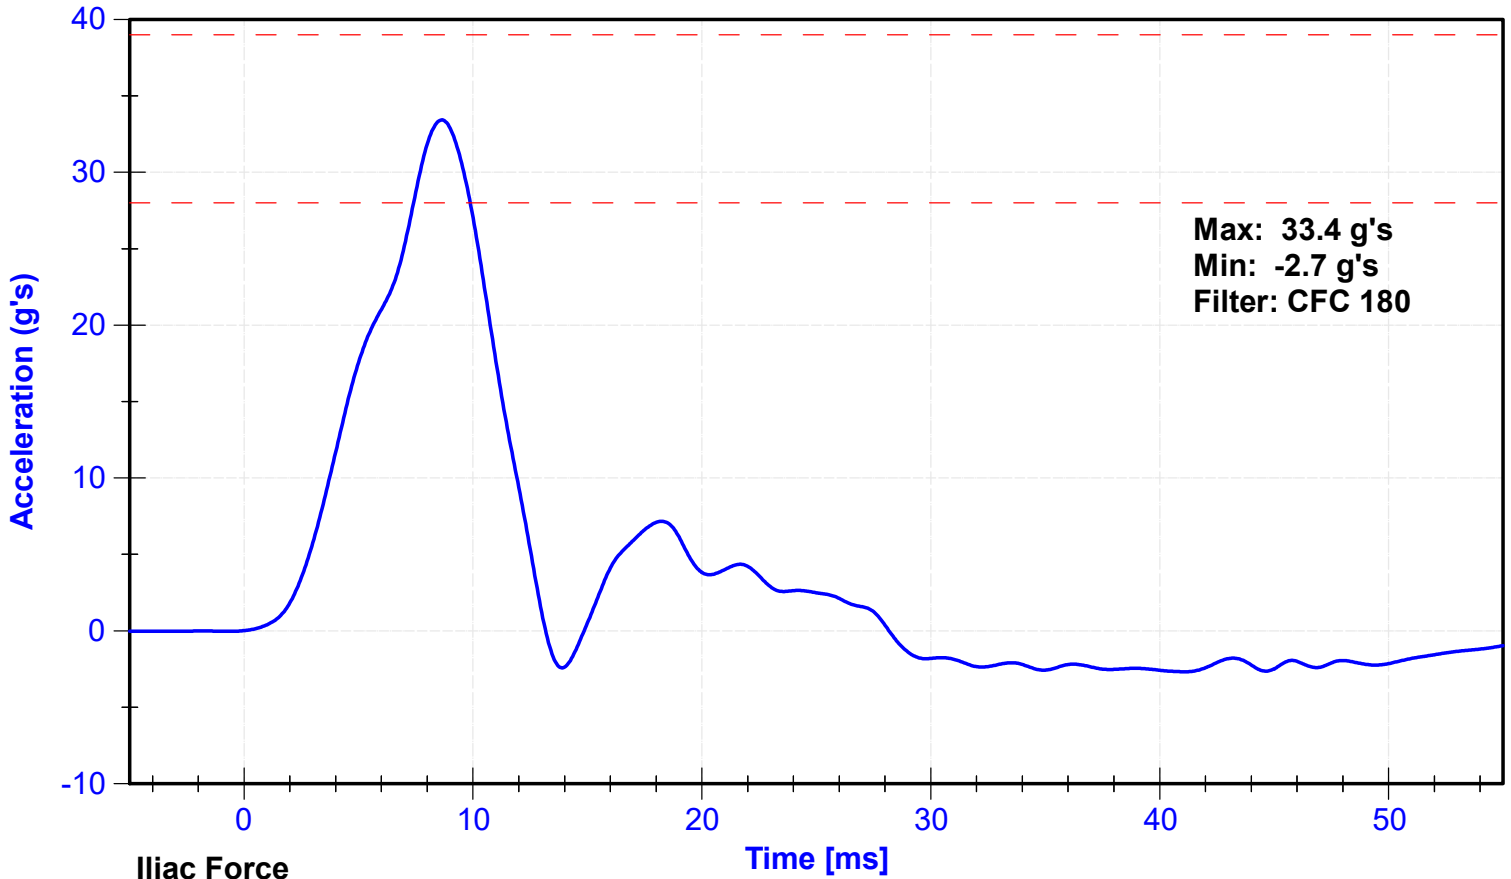

Iliac Force

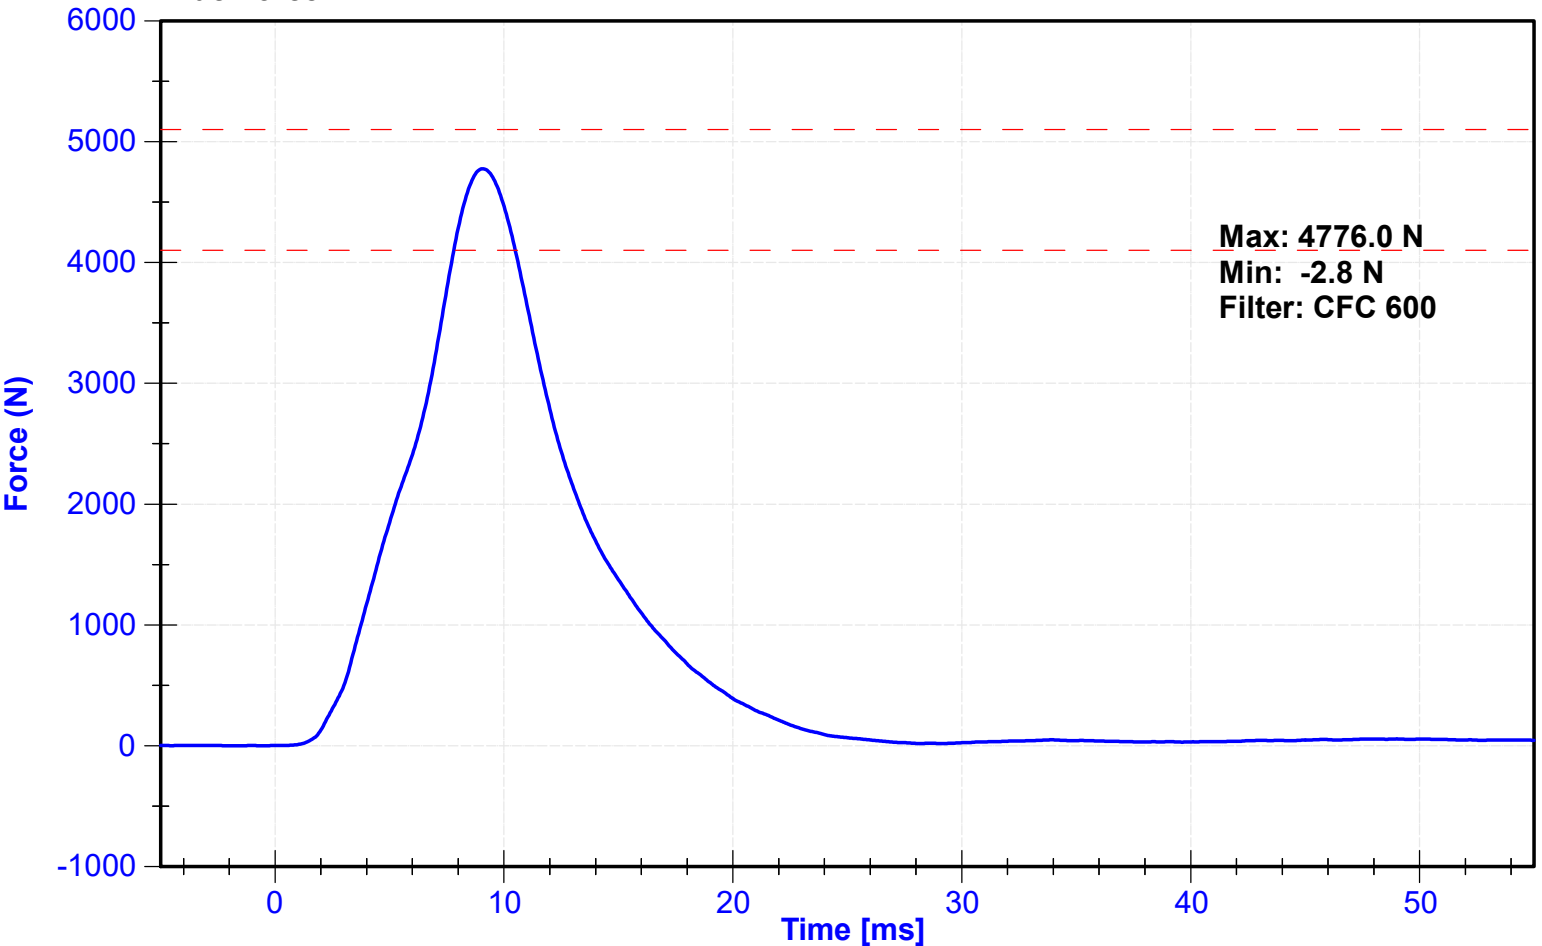

APPENDIX VII

TEST EQUIPMENT AND INSTRUMENTATION CALIBRATION

TABLE 1 – Dummy Instrumentation (ES-2re)

| | | | ES-2re S/N D037 | | |
|--|-----------|---|-----------------|--------------|------------------|
| | | | Serial Number | Manufacturer | Calibration Date |
| Head Accelerometers | Primary | X | T21724 | Endevco | 9/6/2022 |
| | | Y | T22281 | Endevco | 9/6/2022 |
| | | Z | T26050 | Endevco | 9/9/2022 |
| | Redundant | X | T21682 | Endevco | 9/6/2022 |
| | | Y | T25989 | Endevco | 9/9/2022 |
| | | Z | T25864 | Endevco | 9/6/2022 |
| Thorax Rib Displacement Potentiometers | Upper | Y | DS-0552-01 | Honeywell | 9/7/2022 |
| | Middle | Y | DS-807 | Honeywell | 9/7/2022 |
| | Lower | Y | DS-0552-03 | Honeywell | 9/7/2022 |
| Abdomen Load Cells | Forward | Y | 1440 | Denton | 8/12/2022 |
| | Middle | Y | 1525 | Denton | 8/12/2022 |
| | Rear | Y | 1528 | Denton | 8/12/2022 |
| Lower Spine Accelerometers (T12) | | X | P71278 | Endevco | 9/6/2022 |
| | | Y | P71276 | Endevco | 9/6/2022 |
| | | Z | T23573 | Endevco | 9/6/2022 |
| Pubic Symphysis Load Cell | | Y | 3096JFL-456-FY | Denton | 8/12/2022 |

TABLE 2 – Dummy Instrumentation (SID-IIs)

| | | | SID-IIs S/N 261 | | | |
|----------------------------------|---------------|--------|-----------------|--------------|------------------|-----------|
| | | | Serial Number | Manufacturer | Calibration Date | |
| Head Accelerometers | Primary | X | P68067 | Endevco | 10/26/2022 | |
| | | Y | P18567 | Endevco | 10/25/2022 | |
| | | Z | P49163 | Endevco | 10/25/2022 | |
| | Redundant | X | T26041 | Endevco | 10/25/2022 | |
| | | Y | T22409 | Endevco | 10/25/2022 | |
| | | Z | T26086 | Endevco | 10/25/2022 | |
| Displacement Potentiometers | Thoracic Rib | Upper | Y | 062GFE | Servo | 11/1/2022 |
| | | Middle | Y | 528GFE | Servo | 11/1/2022 |
| | | Lower | Y | 513GFE | Servo | 11/1/2022 |
| | Abdominal Rib | Upper | Y | 342GFE | Servo | 11/1/2022 |
| | | Lower | Y | 512GFE | Servo | 11/1/2022 |
| Lower Spine Accelerometers (T12) | | X | T22340 | Endevco | 10/25/2022 | |
| | | Y | P58744 | Endevco | 10/25/2022 | |
| | | Z | T22124 | Endevco | 10/25/2022 | |
| Acetabulum Load Cell | | Y | 275-FY | Denton | 8/11/2022 | |
| Iliac Wing Load Cell | | Y | 279-FY | Denton | 8/11/2022 | |
| Pelvis Plug (struck side) | | | 15165 | SACO | 3/8/2021 | |
| Pelvis Plug (non-struck side) | | | 15457 | SACO | 9/9/2021 | |

TABLE 3 – Vehicle Instrumentation

| Vehicle Instrumentation | | | Serial Number | Manufacturer | Calibration Date |
|-------------------------|------------------------------|---|---------------|-------------------------|------------------|
| 1 | Vehicle Center of Gravity | X | A399961 | Measurement Specialties | 7/12/2022 |
| | Vehicle Center of Gravity | Y | A399962 | Measurement Specialties | 7/12/2022 |
| | Vehicle Center of Gravity | Z | A400008 | Measurement Specialties | 7/12/2022 |
| 2 | Right Sill at Front Seat | X | A327118 | Measurement Specialties | 9/16/2022 |
| | Right Sill at Front Seat | Y | A335437 | Measurement Specialties | 9/16/2022 |
| | Right Sill at Front Seat | Z | A399989 | Measurement Specialties | 9/16/2022 |
| 3 | Right Sill at Rear Seat | X | A398294 | Measurement Specialties | 7/19/2022 |
| | Right Sill at Rear Seat | Y | A400023 | Measurement Specialties | 7/19/2022 |
| | Right Sill at Rear Seat | Z | A400772 | Measurement Specialties | 7/19/2022 |
| 4 | Left Sill at Front Door | Y | G22416 | Endevco | 10/8/2022 |
| 5 | Left Sill at Rear Door | Y | G22408 | Endevco | 10/9/2022 |
| 6 | Left A-Post Lower | Y | G22405 | Endevco | 10/8/2022 |
| 7 | Left A-Post Middle | Y | G22396 | Endevco | 10/9/2022 |
| 8 | Left B-Post Lower | Y | G22391 | Endevco | 10/9/2022 |
| 9 | Left B-Post Middle | Y | G22426 | Endevco | 10/10/2022 |
| 10 | Front Seat Track | Y | G22402 | Endevco | 10/8/2022 |
| 11 | Rear Seat Track or Structure | Y | G22401 | Endevco | 10/8/2022 |
| 12 | Right Rear Occ. Compartment | Y | G22403 | Endevco | 10/8/2022 |
| 13 | Engine Block | X | A274245 | Measurement Specialties | 10/10/2022 |
| | Engine Block | Y | A276073 | Measurement Specialties | 10/10/2022 |
| 14 | Rear Floorpan Above Axle | X | A370888 | Measurement Specialties | 9/29/2022 |
| | Rear Floorpan Above Axle | Y | A370889 | Measurement Specialties | 9/29/2022 |
| | Rear Floorpan Above Axle | Z | A370901 | Measurement Specialties | 9/29/2022 |

TABLE 4 – MDB Instrumentation

| MDB Instrumentation | | Serial Number | Manufacturer | Calibration Date |
|--|---|---------------|-------------------------|------------------|
| Vehicle CG Acceleration vs. Time | X | A405546 | Measurement Specialties | 6/16/2022 |
| Vehicle CG Acceleration vs. Time | Y | A413593 | Measurement Specialties | 6/16/2022 |
| Vehicle CG Velocity vs. Time | Y | A413593 | Measurement Specialties | 6/16/2022 |
| Vehicle CG Acceleration vs. Time | Z | A413602 | Measurement Specialties | 6/16/2022 |
| Vehicle CG Velocity vs. Time | Z | A413602 | Measurement Specialties | 6/16/2022 |
| Vehicle CG Resultant Acceleration vs. Time | R | Calculated | Calculated | Calculated |


APPENDIX VIII
CHECK SHEETS

Federal Motor Vehicle Safety Standards

Work Instructions: FMVSS 214


Side Impact Moving Deformable Barrier Test

Work Instructions Aligned with U.S. D.O.T. National Highway Traffic Safety Administration's Laboratory Test Procedure for FMVSS 214:
Side Impact Moving Deformable Barrier

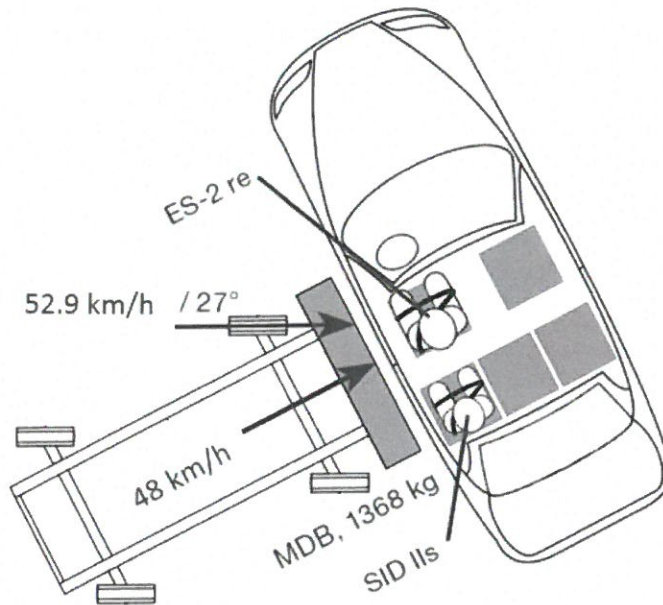

Customer:

JCRSH-00006




C20235803
WAUAUDGYXPA012248
CAL5392_C

Lead Test Engineer:

Table of Contents

| | |
|---|-----------|
| Project Set-up | 4 |
| Vehicle Inspection | 5 |
| Incoming Vehicle Checklist: | 6 |
| Vehicle Condition Checklist:..... | 7 |
| General Vehicle Data:..... | 9 |
| Attitudes, Weights, Mechanical Prep & Electrical Connections | 12 |
| Weight - As Delivered Condition: | 13 |
| Attitude - As Delivered Condition: | 17 |
| CG - As Delivered Condition: | 18 |
| Weight – Fully Loaded Condition: | 19 |
| Attitude - Fully Loaded Condition: | 20 |
| CG - Fully Loaded Condition:..... | 21 |
| Drain Fuel and Paint Vehicle:..... | 22 |
| Mechanical Preparation: | 24 |
| Onboard Camera Installation: | 28 |
| Seat Positioning, Seat Setting, H-Point & Targeting | 30 |
| 1 st Row Seat Positioning – Reference Marks: | 31 |
| 2nd Row Seat Positioning – Reference Marks: | 37 |
| H-Point Left Front Seat (Position 1): | 43 |
| 1 st Row Seat Positioning – Setting Seats | 45 |
| 2 nd Row Seat Positioning – Setting Seats | 46 |
| Setting Steering Wheel & Seat Belt Adjustment | 47 |
| Photographic Tape & Measurements | 49 |
| Pre-Test Measurements: | 52 |
| Vehicle Instrumentation | 56 |
| Instrumentation Installation: | 57 |
| Onboard Test Equipment Installation:..... | 59 |
| Verification of Vehicle, ATD & Facility Readiness | 60 |
| Weight – As Tested Condition:..... | 61 |
| CG – As Tested Condition: | 63 |
| Vehicle Verification: | 64 |
| Install Honeycomb | 65 |
| MDB Photographic Targets and Tape:..... | 66 |
| Align Vehicle & MDB..... | 67 |
| High Speed Camera Set-Up..... | 69 |
| Camera Set-up: | 70 |
| Camera Location - Data Sheet:..... | 75 |
| Camera Control Software..... | 76 |
| Test Set-up & Execution..... | 77 |
| Data Acquisition Software Setup:..... | 78 |


| | |
|---|-----|
| Pre-Test Photos & Video Prior to Seating: | 79 |
| Positioning SID-IIs in Rear Left Position:..... | 80 |
| Positioning ES-2re Male in Driver Position | 82 |
| Dummy Measurement:..... | 84 |
| Inch Tape, Cables & Chalking:..... | 88 |
| Attitude - As Tested Condition: | 89 |
| Pre-Test Photos: | 90 |
| Pre-Test Video:..... | 91 |
| Review Post-Test Assignments with Staff: | 92 |
| Verify Vehicle & Set-Up / Go / No-Go: | 93 |
| OEM Inspection of Set-up: | 95 |
| Tow System & DAS Checklist: | 96 |
| Impact Speed:..... | 97 |
| Impact Location: | 98 |
| Post-Test Observations – Vehicle As Is | 99 |
| Post-Test Hand Measurements | 100 |
| Post-Test Photos – Vehicle As Is:..... | 101 |
| Post-Test Video: | 102 |
| Post-Test Photos: | 103 |
| Post-Test Observations – Doors Open:..... | 104 |
| Post-Test Data Checklist:..... | 106 |
| Critical Results:..... | 107 |
| Notify Customer – Test Executed:..... | 109 |
| Post Test Measurements | 110 |
| Post-Test Exterior Static Crush for Impactor Face | 112 |
| Conversions:..... | 113 |
| Revision History:..... | 114 |



Project Set-up

Instruction: Insert Engineer's Checklist, Customer's Statement of Work or Test Request after this tab.

- Inserted Completed Engineer's Checklist.
- Inserted Customer's SOW / Test Request.
- Inserted Copy of the Form 1.

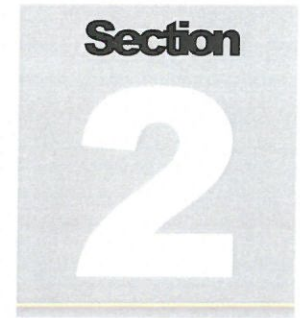

Section
2

Vehicle Inspection

Instruction: Complete the checked task:

| |
|-------------------------------------|
| <input checked="" type="checkbox"/> |
| <input type="checkbox"/> |

Fully Complete the Following Section.

The Following Section Does Not Need to be Completed.

Incoming Vehicle Checklist:

| | | | |
|---------------|----------------|-------|---------|
| Performed by: | Vanessa Hansen | Date: | 11/4/22 |
|---------------|----------------|-------|---------|

Complete the following fields:

| | |
|-----------------------|------------------|
| Dealer | Audi South Coast |
| Date vehicle arrived: | 10/27/22 |
| Model Year | 2023 |
| Make | Audi |
| Model | A3 |

Verify the following and place a checkmark in the appropriate box. Any variances must be reported to the Technical Director within 2 working days of the vehicle's arrival:

Yes No

- All options listed on the 'window sticker' are present on the test vehicle.
- Tires and wheel rims are the same as listed.
- There are no dents or other interior or exterior flaws.
- The vehicle has been properly prepared and is in running condition.
- The glove box contains an owner's manual, warranty document, consumer information, and extra set of keys.
- Proper fuel filler cap is supplied on the test vehicle.
- Spare tire, jack, lug wrench and tool kit (if applicable) is located in the vehicle cargo area.
- The odometer reflects that the vehicle has been driven less than or equal to 200 miles.
- The VIN (vehicle identification number) matches the number supplied by NHTSA.
- Vehicle is equipped / matches description provided by NHTSA.
- Vehicle warning lights (i.e. check engine, SRS, etc.) are not illuminated.
- Floor mats come with vehicle (front and rear). Verify with window sticker.
- Is vehicle a hybrid or full electric vehicle that requires FMVSS 305?

Vehicle Condition Checklist:

Performed by:

VINCE P.

Date:

11/21/22

Complete the following fields:

| | | | |
|----------------------|-------------------|--|-----------------------|
| Make | AUDI | Anti-lock Brakes (ABS) | YES |
| Model | A3 40 TFSI | All-Wheel Drive (AWD) | NO |
| Body Style | 4-DOOR SEDAN | Traction Control System (TCS) | YES YES ^{SP} |
| Vin | WAUUAUDGYXP012248 | Electronic Stability Control (ECS) | YES |
| Body Color | BLACK | Side Curtain Airbags | YES |
| Engine Disp (liters) | 2.0 | Torso Airbag – Front Seats | YES |
| Number of Cylinders | 4 | Torso Airbag – Rear Seats | |
| Engine Placement | INLINE | Combination/Head Torso Bag | NO |
| Transmission Type | AUTOMATIC | Pelvic Airbag – Front Seats | NO |
| Transmission Speeds | 7 | Pelvic Airbag – Rear Seats | NO |
| Overdrive | YES | Knee Airbag – Driver | YES |
| Final Drive | FRONT WHEEL | Knee Airbag – Front Passenger | YES |
| Odometer Reading | 33 MI. | Seat Belt Pretensioners – Front Seats | YES |
| | | Seat Belt Pretensioners – Rear Seats | YES |
| | | Seat Belt Load Limiters – Front Seats | YES |
| | | Seat Belt Load Limiters – Rear Seats | YES |
| | | Tire Pressure Monitoring System (TPMS) | YES |
| | | Tilt Steering Wheel | YES |
| | | Automatic Door Locks (ADL) | YES |
| | | Power Window Auto-reverse | YES |
| | | Power Seats | YES |

Yes No

N/A Does owner's manual provide instructions to turn off automatic door locks?

¹ These items are in addition to the Form 1 Report of Vehicle Condition and are required for The Data Sheet No. 1 General Test and Vehicle Parameters.

| | | | |
|------------------|-----|---------------|-----|
| Tinted Glass | NO | Am/FM CD | NO |
| Power Brakes | YES | Power Windows | YES |
| Front Disc | YES | Other | |
| Rear Disc | YES | | |
| Bucket Seats | YES | | |
| Air Conditioning | YES | | |

Take the following photographs (Refer to the sample photo set if necessary):

Initial:

- VH Close-up view of Vehicle's Tire Placard Label (No. 30)
- V/t Close up view of Vehicle's Certification Label (No. 27)
- Front View
- Left Front ¾ View
- Left Side View
- Left Rear ¾ View
- Rear View
- Right Rear ¾ View
- Right Side View
- Right Front ¾ View
- Monroney Label

General Vehicle Data:

Performed by: VINCE P. Date: 11/21/22

Yes No

Does owner's manual provide instructions to turn off automatic door locks?

Data from Certification Label

| | | | | |
|---------------------|----------------|------------|----------|----|
| Manufactured By | <u>AUDI AG</u> | GVWR | <u>*</u> | kg |
| Date of Manufacture | <u>7/22</u> | GAWR Front | <u>*</u> | kg |
| Vehicle Type | <u>SEDAN</u> | GAWR Rear | <u>*</u> | kg |

* No Data on Certification Label

Vehicle Seating and Weight Capacity Data

| | Front | Rear | Third | Total |
|---------------------------------------|----------|----------|-------|------------------------|
| Designated Seating Capacity (DSC) | <u>2</u> | <u>3</u> | | <u>5</u> |
| Vehicle Capacity Weight (VCW) | | | | (A) <u>390</u> kg |
| DSC x 68.04 kg | | | | (B) <u>340.2</u> kg |
| Load Reduction | | | | (C) <u>0</u> kg |
| Rated Cargo and Luggage Weight (RCLW) | | | | (A-B-C) <u>49.8</u> kg |

Vehicle Seat Type (Check one of the following)


| Seating Location | Type of Seat Pan | | | | Type of Seat Back | | |
|-------------------------|------------------|------------------|-------------|-----------|-------------------|--------------------|-------------------|
| | Bucket | Bench | Split Bench | Contoured | Fixed | Adjustable w/Lever | Adjustable w/Knob |
| Front Seat | <u>X</u> | | | | | | <u>X</u> |
| Rear or Second Row Seat | | | <u>X</u> | | <u>X</u> | | |
| Third Row Seat | <u>N/A</u> | <u>—————></u> | | | | | |

Please list other pertinent Optional Equipment below:

NONE

| Tire Placard Information | Front | Rear |
|--------------------------------------|---------------|---------------|
| Recommended Cold Tire Pressure (kPa) | 280 | 260 |
| Recommended Tire Size | 225/45R17 91H | 225/45R17 91H |

| Tire Sidewall Information | Front | Rear |
|-----------------------------|------------|------------|
| Maximum Tire Pressure (kPa) | 350 | 350 |
| Tire Size on Vehicle | 225/45R17 | 225/45R17 |
| Tire Manufacturer Model | PIRELLI | PIRELLI |
| Tire Name | P ZERO | P ZERO |
| Tire Type | ALL SEASON | ALL SEASON |
| Tire Width | 225 | 225 |
| Aspect Ratio | 45 | 45 |
| Radial | YES | YES |
| Wheel Diameter | 17 | 17 |
| Load Index/Speed Symbol | 91 H | 91 H |
| Tread Wear | 500 | 500 |
| Traction Grade | A | A |
| Temperature Grade | A | A |

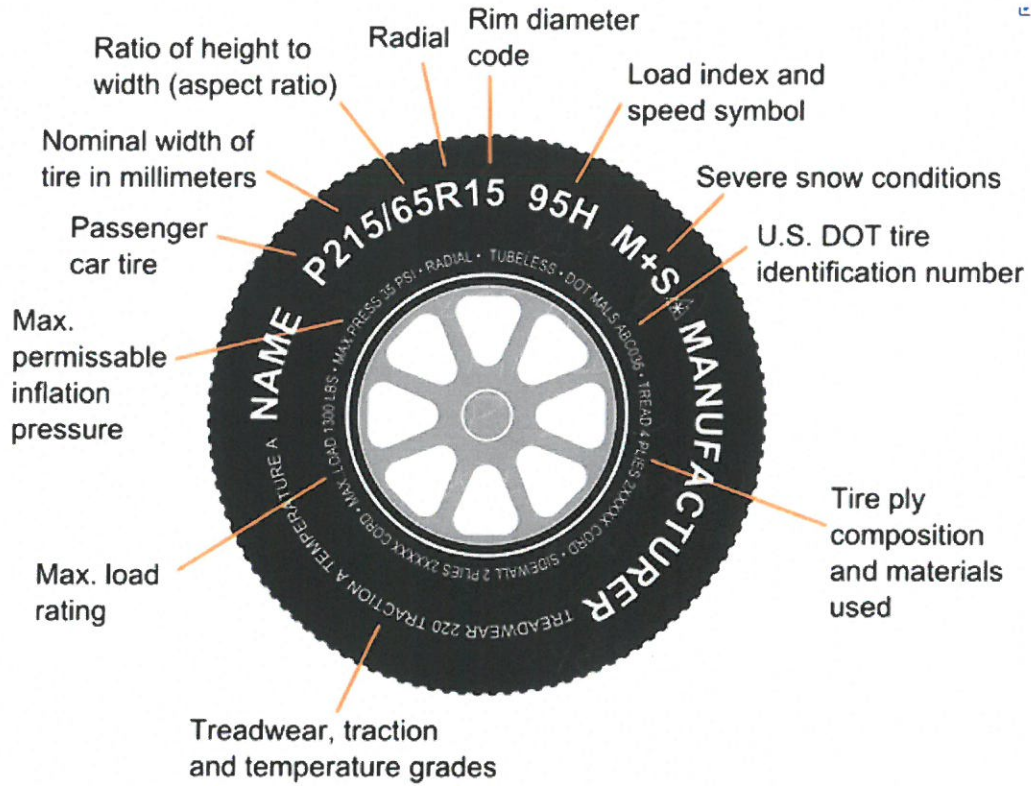

Section

3

Attitudes, Weights, Mechanical Prep & Electrical Connections

Weight - As Delivered Condition:

Performed by:

Lucas Stoffel

Date:

11/17/22

Initial:

LS

Drain the fuel from the fuel tank.


LS

Run engine until all fuel remaining in the fuel delivery system is used and engine stops.

LS

Describe the fuel pump type, details about how it operates and the location of the fuel filler neck in the space provided below.

ELECTRIC FUEL PUMP LOCATED ON TOP OF FUEL TANK

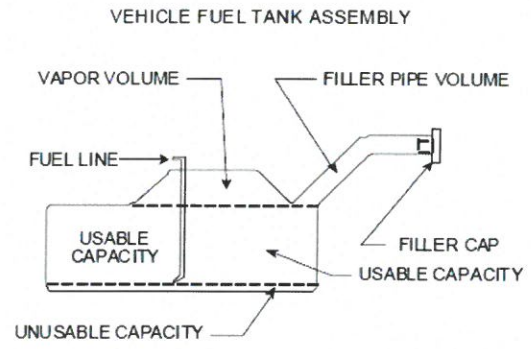

Yes No

Is the vehicle equipped with an electric fuel pump?

If yes, does the pump normally operate when the vehicle's electrical system is activated?

Initial:

- LS Record the usable fuel tank capacity of both standard and optional (if applicable) fuel tanks in the space provided below as stated in the supplied FORM1.
- LS Record the fuel tank capacity of both standard and optional (if applicable) fuel tanks as supplied in the owner's manual in the space provided below.
- LS Calculate 1/3 of the usable capacity of the tank(s) (as supplied on Form 1) and record the calculated value in the space provided below.
- LS Calculate 93% of the usable capacity of the fuel tank(s) and record the calculated value in the space provided below.
- LS Using gasoline, fill the fuel tank to 100% of the usable capacity as supplied on Form 1.
- LS Record the amount of fuel added for the "As Delivered" weight condition in the space provided below.

Note: Stoddard solvent shall be free of debris. It is considered debris-free only if upon filtering with a 10 micron filter, no solid debris is retained on the filter media or in any conduit, container or vessel upstream from the filter paper (e.g. debris is not allowed to be present in the funnel, pump or container).

Fuel Tank Capacity Data

| | | |
|---|------|--------|
| Usable Capacity of "Standard Tank" (see Form No. 1) | 50 | liters |
| Usable Capacity of "Optional Tank" (see Form No. 1) | 55 | liters |
| Usable Capacity of Standard Tank (see Owner's Manual) | 50 | liters |
| Usable Capacity of Optional Tank (see Owner's Manual) | 55 | liters |
| 1/3 of Usable Capacity | 16.5 | liters |
| 93% of Usable Capacity | 46.5 | liters |
| Gasoline to Achieve 100% of Capacity (As Delivered) | 50 | liters |

Initial:

LS Crank the engine to fill the fuel delivery system with gasoline

LS Fill the coolant system to capacity.

LS Fill the engine with motor oil to the maximum mark on the dip stick.


LS Fill the transmission with transmission fluid to full capacity.

LS Fill the brake reservoir with brake fluid to its normal level.

LS Fill the windshield washer reservoir to capacity.

LS Inflate the tires to the cold tire pressure indicated on the tire placard. If no tire placard is available, inflate the tires to the recommended pressure in the owner's manual and record the pressure for each tire in the space provided below.

| | Units | LF | RF | LR | RR |
|---------------------------------------|-------|-----|-----|-----|-----|
| As Delivered | kpa | 271 | 264 | 268 | 263 |
| Tire Placard | kpa | 280 | 280 | 260 | 260 |
| Owner's Manual | kpa | 280 | 280 | 260 | 260 |
| Tire Pressure Gage Unique Identifier: | | - | | | |

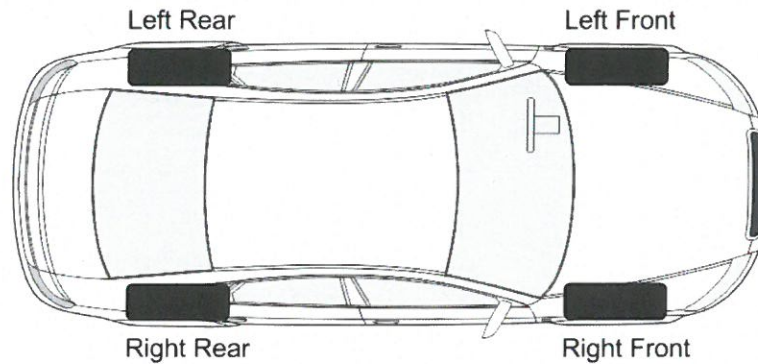

Initial:

LS Weigh the vehicle at each wheel and add the weights together to determine the “As Delivered” (or “Unloaded Vehicle”) weight.

LS Record the weight measurements and Weight Scale’s Unique Identifier in the space provided below.

| | | As Delivered (UVW) | | |
|---------------------------------|-------|--------------------|-------------|-------------------|
| | Units | Front Axle | Rear Axle | Total |
| Left | kg | 454 | 302 | $W_{Left} = 756$ |
| Right | kg | 459 | 296 | $W_{Right} = 755$ |
| Ratio | % | 60.4 | 39.5 | |
| Totals | kg | $W_F = 913$ | $W_R = 598$ | 1511 |
| Weight Scale Unique Identifier: | | | | |

Initial:

LS Calculate the Rated Cargo and Luggage Weight (RCLW) and record this value in the space provided below. For trucks, MPV’s or Buses - **If the RCLW calculated is greater than 136 kg, use 136 kg as the RCLW.**

LS Calculate the Test Vehicle Target Weight by adding the “As Delivered” weight, the RCLW, and the weight of the fully instrumented dummies in the space provided below.

| Rated Cargo and Luggage Weight Calculation | Units | Value | |
|--|-------|--------|---------------------------------------|
| Vehicle Capacity Weight (VCW - From Vehicle Placard) | kg | 390 | (A) |
| Reduced Load Capacity (if Applicable) | kg | N/A | (B) |
| Designated Seating Capacity (DSC - From Vehicle Placard) | | 5 | (C) |
| Rated Cargo and Luggage Weight (RCLW) | kg | 49.8 | $(C \times 68.04 \text{ kg}) - (A-B)$ |
| Is the RCLW > 136 kg? If yes use 136 kg as RCLW | kg | N/A | |
| Target Test Weight Calculation | Units | Value | |
| Total As Delivered Weight (UVW = Unloaded Vehicle Wgt.) | kg | 1511 | (A) |
| Actual Weight of 1 – ES-2re ATD & 1 – SID-IIs ATD (Ask ATD Lab for specific ATD Weight) | kg | 131 | (B) |
| Rated Cargo / Luggage Weight (RCLW) | kg | 49.8 | (C) |
| Calculated Vehicle Target Weight (TVTW) | kg | 1691.8 | (A+B+C) |
| Target Test Weight (min): | kg | 1682.8 | $(A+B+C) - 9.0 \text{ kg}$ |
| Target Test Weight (max): | kg | 1687.3 | $(A+B+C) - 4.5 \text{ kg}$ |

Attitude - As Delivered Condition:

Performed by: LUCAS STOFFEL Date: 11/17/22

Note: Do not lift the vehicle off the ground until the attitude measurements have been taken.

Initial:

- LS With the vehicle in the "As Delivered" weight condition, place it on a flat, level surface.
- LS Place transmission in neutral. Note: If the vehicle has an Auto-Leveling, the ignition must be set to the "on" position. If the vehicle is equipped with a self-adjusting hydraulic system, contact the COTR for further guidance on attitude measurements.
- LS Exercise the suspension by rolling the vehicle forward and rearward approximately 4 to 6 feet. Repeat this step three to four additional times.
- LS Mark a point on each vehicle body above the center of each wheel.
- LS Measure the perpendicular distance from the level surface to the four (4) points marked on the vehicle and record each.

| Vehicle Attitudes | Units | LF | RF | LR | RR |
|---------------------------------|-------|-----|-----|-----|-----|
| As Delivered | mm | 694 | 694 | 703 | 707 |
| Tape Measure Unique Identifier: | | - | | | |



CG - As Delivered Condition:

Performed by: VH Date: 11/22/22

Initial:

VH Measure and record the vehicle distances and copy the weights from the previous section in the space provided below in order to calculate the vehicle CG aft of the front axle.

Center of Gravity Calculation:

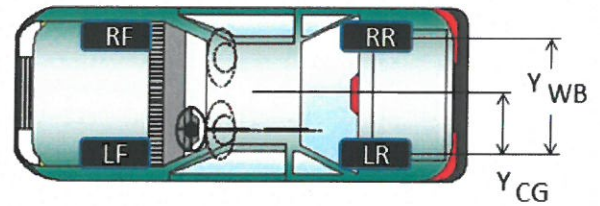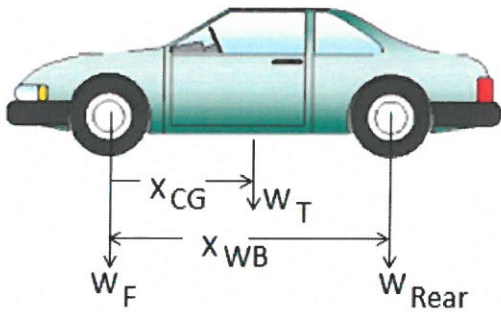

$$X_{CG} = \frac{X_{WB} \times W_{Rear}}{W_{Total}}$$

(From Front Axle)

$$Y_{CG} = \frac{Y_{WB} \times W_{Right}}{W_{Total}}$$

(From Left Wheel Centerline)

$$X_{CG} = \frac{X_{WB} \times W_{Rear}}{W_{Total}}$$

~~1040~~ mm = $\frac{2630 \text{ mm} \times 598 \text{ kg}}{1511 \text{ kg}}$
1041 mm

$$Y_{CG} = \frac{Y_{WB} \times W_{Right}}{W_{Total}}$$

1511 mm = $\frac{1518 \text{ mm} \times 753 \text{ kg}}{758.5 \text{ kg}}$
0.5 mm

Test Vehicle Center of Gravity (CG)

| | Units | As Delivered | |
|--|-------|--------------|-----------------|
| Vehicle CG (Aft of Front Axle) | mm | 1041 | X _{CG} |
| Vehicle CG (Left (+) / Right (-) from Longitudinal Centerline) | mm | 0.5 | Y _{CG} |

Weight – Fully Loaded Condition:

Performed by: LUKE C + JEFF W Date: 11-21-22

Initial:

LC+JW

With the vehicle in the “As Delivered” weight condition, load the vehicle with the ballast equal to the RCLW placed in the luggage or load carrying/cargo area. Center the load over the longitudinal centerline of the vehicle.

LC+JW

Place the weight of the fully instrumented test dummy (with clothes and shoes) into the appropriate seating positions. **(Ask ATD Lab for specific ATD Weight)**

LC

Reference weight: Driver 178.6 lbs.

LC

Reference weight: Rear Passenger 110.2 lbs.

LC

Weigh the vehicle at each wheel and add the weights together to determine the “Fully Loaded” weight. Record the weight measurements in the space provided below.

| | | Fully Loaded | | |
|----------------------------------|-------|---------------------|---------------------|---------------------------|
| | Units | Front Axle | Rear Axle | Total |
| Left | kg | <u>499</u> | <u>380</u> | $W_{Left} = $ <u>879</u> |
| Right | kg | <u>468</u> | <u>347</u> | $W_{Right} = $ <u>815</u> |
| Ratio | % | <u>57.1 %</u> | <u>42.9 %</u> | |
| Totals | kg | $W_F = $ <u>967</u> | $W_R = $ <u>727</u> | <u>1694</u> |
| Weight Scales Unique Identifier: | | <u>400323</u> | | |

Attitude - Fully Loaded Condition:

| | | | |
|---------------|-----------------|-------|----------|
| Performed by: | LUKE C + JEFF W | Date: | 11-21-22 |
|---------------|-----------------|-------|----------|

Initial:

LC With the vehicle in the "Fully Loaded" weight condition, place it on a flat, level surface.

Note: If the vehicle has an Auto-Leveling, the ignition must be set to the "on" position. If the vehicle is equipped with a self-adjusting hydraulic system, contact the COTR for further guidance on attitude measurements.

JW Exercise the suspension by rolling the vehicle forward and rearward approximately 4 to 6 feet. Repeat this step three to four additional times.

LC Measure the perpendicular distance from the level surface to the four (4) points previously marked on the vehicle and record each in the space provided below.

LC Record the Unique Identifier of the inclinometer used to complete these measurements in the space provided below.

| Vehicle Attitudes | Units | LF | RF | LR | RR |
|---------------------------------|-------|-----|-----|-----|-----|
| Fully Loaded | mm | 684 | 693 | 672 | 682 |
| Tape Measure Unique Identifier: | | — | | | |

CG - Fully Loaded Condition:



Performed by: QF Date: 1/22

Initial:

QF

Measure and record the vehicle distances and copy the weights from the previous section in the space provided below in order to calculate the vehicle CG aft of the front axle and left (+) / right (-) from the longitudinal centerline.

Center of Gravity Calculation:

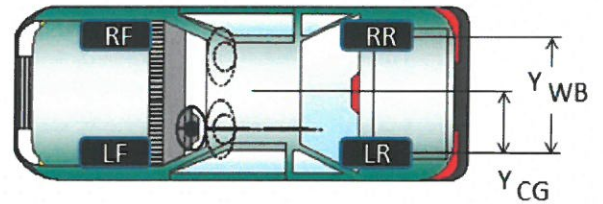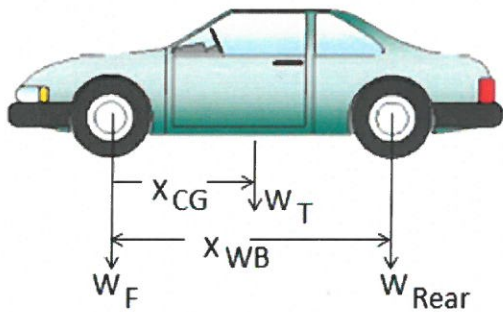

$$X_{CG} = \frac{X_{WB} \times W_{Rear}}{W_{Total}}$$

(From Front Axle)

$$Y_{CG} = \frac{Y_{WB} \times W_{Right}}{W_{Total}}$$

(From Left Wheel Centerline)

$$X_{CG} = \frac{X_{WB} \times W_{Rear}}{W_{Total}}$$

1129 mm = $\frac{2630 \text{ mm} \times 727 \text{ kg}}{1694 \text{ kg}}$

$$Y_{CG} = \frac{Y_{WB} \times W_{Right}}{W_{Total}}$$

1518 mm = $\frac{1518 \text{ mm} \times 815 \text{ kg}}{1694 \text{ kg}}$

Test Vehicle Center of Gravity (CG)

| | Units | As Delivered | |
|--|-------|--------------|-----------------|
| Vehicle CG (Aft of Front Axle) | mm | 1129 | X _{CG} |
| Vehicle CG (Left (+) / Right (-) from Longitudinal Centerline) | mm | 29 | Y _{CG} |

Drain Fuel and Paint Vehicle:

Performed by: Lucas Stoffel Date: 11/17/22

Initial:

- LC Remove the ballast weight (RCLW) from the cargo area.
- LS Drain the fuel tank. Use caution when draining the fuel. Do not damage or remove any fuel system components.
- LS Using purple dyed Stoddard solvent fill the tank to 93 % ($\pm 1\%$) of the usable capacity as supplied on Form 1 found in a previous section.
- LS Record this amount of Stoddard solvent in the space provided below along with the Unique Identifier of the meter used to conduct this task.
- LS Record this amount on the inside of the fuel filler lid.

| | | |
|---------------------------------------|---------------|--------|
| Actual Amount of Solvent Used in Test | <u>46.5</u> | liters |
| Pump Meter Unique Identifier | <u>400605</u> | |

Yes No

Is the Actual Amount of Solvent Used in the test equal to 93% \pm 1% of the Usable Capacity stated in on Form No. 1?

Initial:

- LC Disable all side airbags on the non-struck side of the vehicle per manufacturer's instructions. If manufacturer will be here for the test confirm that the manufacturer has disabled these airbags prior to conducting the test.
- N/A Disable vehicle Daytime Running Lights (if equipped).
- N/A Remove horn fuse.
- N/A Tape off interior airbag covers, instrument cluster, transmission gear selector, and airbag cut-off switch (if equipped).
- LC Paint vehicle interior surfaces such as the instrument panel, A-post trim panels, door trim panels, console, etc., with flat white paint. Note: Do not paint points marked on dash if they are present before painting. Note: The air bag indicator light on the dash shall NOT be painted so as to be visible prior to testing. Also be sure not to paint over passenger air bag indicator light.
- LS Black out mirrors.
- LS Place driver and passenger front windows in the fully open position. Place all other windows and vents in the fully closed position unless otherwise specified by the COTR.
- N/A Adjustable cowl tops or other adjustable panels in front of the windshield should be placed in the position used under normal operation during inclement weather.

LS Evacuate refrigerant.

N/A Tap brakes for abort.

LS Drain the engine oil *

LS Drain the transmission fluid *

N/A Drain the transfer case (4WD) *

LS Drain the engine coolant *

LS Drain the windshield washer fluid *

N/A Drain the power steering fluid *

*Note: Ensure that no fluids are leaking from the vehicle after being drained. Seal any leaks before vehicle is transported to the test track.

Mechanical Preparation:

| | | | |
|---------------|------------|-------|----------|
| Performed by: | Luke Crane | Date: | 11-21-22 |
|---------------|------------|-------|----------|

Initial:

LL

Remove trunk carpeting, spare tire and jack (in trunk). Note: Per the NHTSA procedure, the spare tire, rear radio speakers, interior door trim and windows on the non-struck side, outboard mirrors on non-struck side taillights and rear bumper can be removed – IF NECESSARY. Refer to the Form 1 for a list of components that the manufacturer will allowed to be removed from the vehicle.

Equipment that is no longer on the test vehicle:

| Description | Weight | |
|-----------------|--------|----|
| Trunk carpeting | 5 | kg |
| Spare tire | 15 | kg |
| Jack | 3 | kg |
| Rear speaker | — | kg |
| Tail light | — | kg |
| | | kg |

| Description | Weight | |
|-------------|--------|----|
| W/A | W/A | kg |
| | | kg |
| | | kg |
| | | kg |
| | | kg |
| | | kg |

| | |
|---------------------------------|--------|
| Weight Scale Unique Identifier: | 400323 |
|---------------------------------|--------|

Explanation for equipment removal:

Instrumentation Plate

| Initial: | | Description | Qty. |
|--|----|--|------|
| CS | 1 | Trunk Release NOT FOR REAR. Cut trunk release cable inside of vehicle and route outside to rear deck lid. | 1 |
| LC | 2 | Hood Release NOT FOR FRONTAL. Cut hood release cable near fender and tape to bumper. | 1 |
| Jw | 3 | Instrumentation Plate Install instrumentation plate in trunk. Note location of all fuel components and use caution when drilling holes. | 1 |
| N/A | 4 | Abort Package Install abort package on instrumentation plate leading to rear brakes. Verify no leaks. | 0 |
| N/A | 5 | Roof Camera Mount Interior T-Bar, stay clear of side curtain air bags when drilling. | 0 |
| Jw | 6 | Side Door Camera Mount | 2 |
| LC | 7 | Hood Camera Mount | 1 |
| N/A | 8 | Toe Pan Camera Mount Place seat in test position. Install toe pan camera in corresponding footwell area as far back as possible. Check for fuel lines before drilling. | 0 |
| Jw | 9 | LED Light On the camera mount, attach (2) LED lights to either side of each camera (2 in total). | 3 |
| N/A | 10 | Remote Battery and Cable Route remote battery cable over the vehicle on the non-struck side to the monitor box. Not needed for AGM type battery. | 0 |

| | | | |
|-------------------------------------|----|---|---|
| <input type="checkbox"/> Jw | 11 | Battery Monitor Box | 1 |
| | | Mount the battery monitor box to the right rear corner / non-struck corner. | |
| <input checked="" type="checkbox"/> | 12 | Umbilical Hangar | 1 |
| | | Attach the umbilical hanger to rear quarter panel on same side as umbilical | |
| N/A | 13 | Air Bag Monitor | 0 |
| | | As per test request, connect inductive pickup to corresponding airbag positive (+) wire. | |
| N/A | 14 | Overhead Target Bar | 0 |
| | | Refer to Vehicle Targeting section | |
| <input type="checkbox"/> Jw | 15 | Trigger | 2 |
| | | Tape (2) triggers centered on the front hood and run cables to the truck / cargo area. Leave 2 feet of cable slack on hood. | |
| N/A | 16 | Flash Unit | 0 |
| | | Attach flash units. | |
| <input checked="" type="checkbox"/> | 17 | LED Light Box | 1 |
| | | Mount one LED Light box to the instrumentation plate. | |
| <input type="checkbox"/> LC | 18 | Camera Network Box | 1 |
| | | Mount on instrumentation plate or rear floor pan depending on camera placement. Only 1 cable per camera, no extensions. | |
| <input checked="" type="checkbox"/> | 19 | Breakout Box / Hub | 1 |
| | | Mount Breakout Box hub to instrumentation plate. | |
| <input checked="" type="checkbox"/> | 20 | DAU (KI/MINI) | 3 |
| | | Mount (3) DAUs to the instrumentation plate. | |

| | | | |
|-----|----|--|---|
| N/A | 21 | Wireless Antenna | 1 |
| | | Mount (1) wireless antenna within the trunk / cargo compartment. | |
| N/A | 22 | Speed Trap Bar | 0 |
| | | Fasten speed trap bar to rear bumper of vehicle, opposite side of umbilical. (395 mm minimum height) | |
| ✓ | 23 | 25ft Camera Cable | 3 |
| ✓ | 24 | IDT Camera | 3 |
| | | Mount (2) IDT cameras to the onboard camera mounts. | |
| N/A | 25 | GoPro Camera | 0 |
| N/A | 26 | Seat Belt Displacement Sensor | 0 |
| | | Screw displacement sensor bracket to corresponding pillar in line with seat belt at thorax height as per dummy placement | |
| N/A | 27 | Seat Belt Load Cell | 0 |
| | | (See Form 1) - Place (2) seat belt load cells on the front driver's seat. Place (2) seat belt load cells on the front passenger seat. | |

Onboard Camera Installation:

Performed by:

MP

Date:

11/21/22

- Install Camera Hub with Power & Trigger Cables
- Install On-Board Camera's & Cables to Mounts
- Check to make sure all required camera views are met. If not readjust camera mounts until all required views are met. (See photo references below)
- Verify the Battery is fully charged
- Install On-Board Lights Battery Box & ensure all light cables reach the box. If they do not install extension cables.
- Tie down all wiring related to the cameras and lights
- Pin all onboard cameras & camera bars to stabilize images during the impact.

High speed camera and light mounts photo reference:

High speed camera (1000 fps): Camera #7 – Onboard Dummy Front View and two LED lights to capture the following field of view:



High speed camera (1000 fps): Camera #8 –Onboard Dummy Side View and two LED lights to capture the following field of view:



High speed camera (1000 fps): Camera #9 – Onboard Dummy Rear Passenger Side View and two LED lights to capture the following field of view:



Section


4

Seat Positioning, Seat Setting, H- Point & Targeting

1st Row Seat Positioning – Reference Marks:

| | | | |
|---------------------------------|--------------|-------|------------|
| Performed by: | David Hooper | Date: | 11/16/2022 |
| Tape Measure Unique Identifier: | 400602 | | |
| Inclinometer Unique Identifier: | 401133 | | |

Instructions: In this section there are three sets of check marks. The first row corresponds with the front driver seat (P1), the second row corresponds with the front center seat (P5) and the third row corresponds with the front passenger seat (P2).

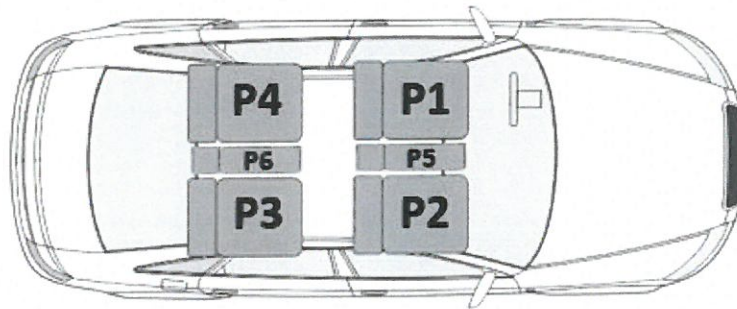

Setting the Seats - Driver, Front Center, and Front Passenger Seats

Set the driver, front center (if applicable), and front passenger seats accordingly:

Initial Settings -----

Initial:

DH

1. Determine the Seat Type

Visually inspect the front seats to determine its type (i.e., bucket or bench).

| | | |
|--------------------------------|------------------|-------------------|
| Driver Seat: | Bench _____ | Bucket <u>DH</u> |
| Front Outboard Passenger Seat: | Bench _____ | Bucket <u>DH</u> |
| Front Center Seat: | Bench <u>N/A</u> | Bucket <u>N/A</u> |

| | | |
|-------------------------------------|--------------------------|-------------------------------------|
| P1 | P5 | P2 |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |

2. Position lumbar supports

Position the seat's adjustable lumbar supports to the lowest, retracted or deflated adjustment positions.

N/A, No lumbar adjustment

EH N/A EH

3. Position additional supports

Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position.

N/A, No additional support adjustment

N/A N/A N/A

4. Position leg supports

Position an additional leg support system in its rearmost position.

EH N/A, No additional support adjustment

EH N/A EH

5.2.1. Position head restraint

Using any adjustment of the head restraint, position it to its highest position.

EH N/A EH

5.2.2. Using any adjustment of the head restraint, position it to the full forward position. If it rotates, rotate it such that the head restraint extends as far forward as possible.

N/A – The test vehicle is equipped with automatically adjusting head restraints or there is no head restraint adjustment.

EH N/A N/A

6. Mark the longitudinal centerline of the seat

6.1 Driver's seat:

If adjustable, place the seat back in its most vertical (upright) position. For bucket seats, locate and **mark** for reference the intersection of a vertical longitudinal plane that passes through the SgRP and the seat cushion upper surface, seat back and head restraint. For bench seats, draw a line along the intersection of a vertical longitudinal plane that passes through the centerline of the steering wheel and the seat cushion upper surface, seat back and head restraint.

EH N/A EH

7. Mark the range of seat travel

Prior to marking the seat, move the seat through its full range of motion using all available controls. Separately, operate each control to determine whether it moves the seat and/or seat cushion primarily in the fore-aft or up-down directions.

| Seat Fore/Aft Positioning | Total Fore/Aft Travel | Placed in Position # |
|---------------------------|-----------------------|----------------------|
| Driver | 246 | M123 |
| Front Passenger Seat | 246 | M123 |
| Front Center Seat | N/A | N/A |

All N/A All

7.1 Mark a point (seat cushion reference point - **SCRCP**) on the side of the seat cushion that is between 150 mm and 250 mm from the front edge of the seat cushion. For seat cushions that move up and down independently from the seat housing, mark the point on the side of the cushion in an area that will not be obscured by the seat housing when the seat cushion is at its lowest height position.

All N/A All

7.2 Draw a horizontal line (seat cushion reference line - **SCRL**) through the **SCRCP**.

All N/A All

7.3 Use only the controls that primarily move the seat in the fore-aft direction to move the **SCRCP** to the rearmost position.

All N/A All

7.4 If the seat cushion adjusts fore-aft, independent of the seat back, use only the controls that primarily move the seat cushion in the fore-aft direction to move the **SCRCP** to the rearmost position.

N/A No independent fore-aft seat cushion adjustment

All N/A All

7.5 Use any part of any control, other than the parts just used for fore-aft positioning, to determine the range of angles of the **SCRL** and to set the **SCRL** at mid-angle. Record the maximum, minimum and midangles in the table below;

| SCRL° | Max | Min | Mid |
|----------------------|------|------|------|
| Driver Seat | 24.5 | 14.5 | 19.5 |
| Front Passenger Seat | 25.4 | 16.0 | 20.7 |
| Front Center Seat | N/A | N/A | N/A |

All N/A All

7.6 If the seat and/or seat cushion height is adjustable, use any part of any control other than the parts which primarily move the seat or seat cushion fore-aft, to put the **SCRCP** in its lowest position with the **SCRL** angle at the mid-angle found in 7.5.

N/A No independent fore-aft seat cushion adjustment

All N/A All

7.7 Use only the controls that primarily move the seat in the fore-aft direction to verify the seat is in the rearmost position.

QH N/A QH

7.8 Use only the controls that primarily move the seat in the fore-aft direction to **mark** the fore-aft seat positions. **Mark** each position so that there is a visual indication when the seat is at a particular position. For manual seats, move the seat forward one detent at a time and **mark** each detent. For power seats, **mark** only the rearmost, middle, and foremost positions. Label three of the positions with the following: F for foremost, M for mid-position (if there is no mid-position, label the closest adjustment position to the rear of the mid-point), and R for rearmost.

QH N/A QH

7.9 Use only the controls that primarily move the seat in the fore-aft direction to move the **SCRIP** to the rearmost position.

QH N/A QH

7.10 Use any part of any control, other than the parts which primarily move the seat or seat cushion fore-aft, to find the maximum, minimum, and middle height of the **SCRIP** with the **SCRL** at the mid-angle determined in 7.5 by measuring from the **SCRIP** to a reference point on the floor pan or sill. Record the maximum, minimum and middle heights on the table below.



N/A No independent fore-aft seat cushion adjustment

QH N/A QH

7.11 Use only the controls that primarily move the seat and/or seat cushion in the fore-aft direction to place the **SCRIP** at the mid-fore-aft position.

QH N/A QH

7.12 Use any part of any control, other than the parts which primarily move the seat or seat cushion fore-aft, to find the maximum, minimum, and middle height of the **SCRIP** with the **SCRL** at the mid-angle determined in 7.5 by measuring from the **SCRIP** to a reference point on the floor pan or sill. Record the maximum, minimum and middle heights on the table below.

QH N/A QH

7.13 Use only the controls that primarily move the seat in the fore-aft direction to place the **SCRIP** at the full forward position.

QH N/A QH

7.14 Use any part of any control, other than the parts which primarily move the seat or seat cushion fore-aft, to find and visually **mark** the maximum, minimum, and middle height of the **SCRIP** with the **SCRL** at the midangle determined in 7.5 by measuring from the **SCRIP** to a reference point on the floor pan or sill. Record the maximum, minimum and middle heights and SCRL mid-angle on the table below.

| Seat | SCRL Mid-Angle (7.5) | SCRIP Height Position | SCRIP Height (mm) | | |
|----------------------|----------------------|-----------------------|-------------------|---------------------|---------------------|
| | | | Rearmost (7.10) | Mid-fore/aft (7.12) | Full forward (7.14) |
| Driver Seat | 19.5 | Max | 71.63 | 81.15 | 90.05 |
| | | Mid | 37.50 | 46.96 | 56.03 |
| | | Min | 3.20 | 12.59 | 21.94 |
| Front Passenger Seat | 20.7 | Max | 67.03 | 78.87 | 85.53 |
| | | Mid | 35.21 | 46.94 | 53.68 |
| | | Min | 3.37 | 15.22 | 21.92 |
| Front Center Seat | N/A | Max | N/A ————— | | |
| | | Mid | N/A ————— | | |
| | | Min | N/A ————— | | |

DH
N/A
DH

8. For adjustable seat backs, position the seat back at the foremost stop. Mark each position of adjustment from the foremost to rearmost stops so that there is a visual indication when the seat back is at a particular position.

For manually adjustable seat backs (with detents), move the seat back rearward one detent at a time and mark each detent. Label the rearmost, middle, and foremost positions with the measured detent. If no middle detent exists, label the next most-rearward detent to the middle position.

For power seat backs (no detents), move the seat back rearward one degree at a time and mark each angle. Angles should be measured at the location on the seat (head restraint, seat back, plastic trim, etc.) as indicated by the manufacturer on Form No. 1. Label the rearmost, middle, and foremost positions with the measured angle.

Record the range of angles in degrees and detents in the space provided below. Visually mark and label for future reference the rear seat back angle, if adjustable, as provided by the manufacturer on Form No. 1 for the 50th percentile (ES-2re) male dummy in a Side MDB test.

| Seat | Total Seat Back Angle Range | | Test Position from Most Upright | |
|-----------------------------|-----------------------------|-----------|---------------------------------|----------|
| | Degrees | Detents * | Degree | Detent * |
| Driver Seat w/ Seated Dummy | 58.6 | Powered | + 18.6 ^{NO} ATD | Powered |
| Front Passenger Seat | 58.6 | Powered | + 18.5 ^{NO} ATD | Powered |
| Front Center Seat | N/A | N/A | N/A | N/A |

 N/A
8. Mark the seat belt upper anchorage positions

Mark for reference each vertical position of a manually adjustable seat belt upper anchorage.

Mark and label each position with the following: H for highest, M"X" for mid-positions (where "X" stands for 1, 2, 3, etc. and 1 is used for the highest mid-position), and L for lowest.

N/A No independent fore-aft seat cushion adjustment

 9. Mark the steering wheel position

Is the steering wheel adjustable up and down and/or in and out?

Yes, go to 9.1

No - Check Sheet completed.

9.1 Find and **mark** for future reference each up and down position. Label three of the positions with the following: H for highest, M for mid-position (if there is no mid-position, label the next lowest adjustment position), and L for lowest.


N/A steering wheel is not adjustable up and down

9.2 Find and **mark** for future reference each -in- and -out- position. Label three of the positions with the following: F for foremost, M for mid-position (if there is no mid-position, label the next rearmost adjustment position), and R for rearmost.

2nd Row Seat Positioning – Reference Marks:

| | | | |
|---------------------------------|--------------|-------|------------|
| Performed by: | David Hooper | Date: | 11/16/2022 |
| Tape Measure Unique Identifier: | 400602 | | |
| Inclinometer Unique Identifier: | 401133 | | |

Instructions: In this section there are three sets of check marks. The first row corresponds with the rear struck side seat (left rear seat P4), the second row corresponds with the rear center seat (P6) and the third row corresponds with the rear outboard passenger seat (P3).

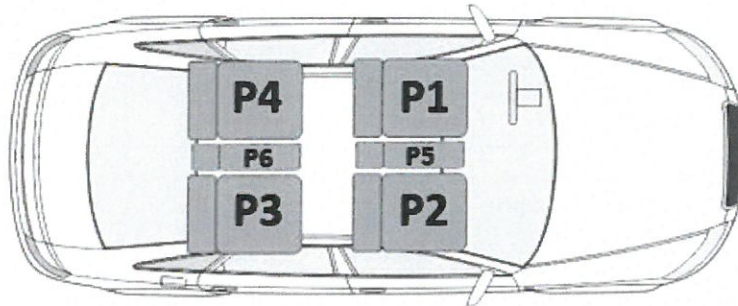

Setting the Seats - Driver, Front Center, and Front Passenger Seats

Set the driver, front center (if applicable), and front passenger seats accordingly:

Initial Settings

Initial:

DH 1. Determine the Seat Type

Visually inspect the front seats to determine its type (i.e., bucket or bench).

| | | |
|----------------------------------|-----------------|---------------------------------|
| Struck Side Rear Passenger Seat: | Bench <u>DH</u> | Bucket <input type="checkbox"/> |
| Non-Struck Side Passenger Seat: | Bench <u>DH</u> | Bucket <input type="checkbox"/> |
| Rear Center Seat: | Bench <u>DH</u> | Bucket <input type="checkbox"/> |



2. Position lumbar supports

Position the seat's adjustable lumbar supports to the lowest, retracted or deflated adjustment positions.

DH N/A, No lumbar adjustment

N/A

3. Position additional supports

Position any adjustable parts of the seat that provide additional support so that they are in the lowest or most open adjustment position.

N/A, No additional support adjustment

N/A

4. Position leg supports

Position an additional leg support system in its rearmost position.

N/A, No additional support adjustment

5.2.1. Position head restraint – *Lowest Position As per FORM 1*

Does the adjustable head restraint have a non-use position as defined by FMVSS No. 202a?

Yes - Set the head restraint to the lowest position using the procedure described by the manufacturer. Go to step 6.

No – go to step 5.1.2

5.1.2. Using any adjustment of the head restraint, position it to its lowest position.

N/A N/A N/A

5.1.3 Using any adjustment of the head restraint, position it to the full forward position. If it rotates, rotate it such that the head restraint extends as far forward as possible.


N/A – The test vehicle is equipped with automatically adjusting head restraints or there is no head restraint adjustment.

N/A N/A

6. Mark the longitudinal centerline of the seat

6.1 Driver's seat:


If adjustable, place the seat back in its most vertical (upright) position. For bucket seats, locate and **mark** for reference the intersection of a vertical longitudinal plane that passes through the SgRP and the seat cushion upper surface, seat back and head restraint. For bench seats, draw a line along the intersection of a vertical longitudinal plane that passes through the centerline of the steering wheel and the seat cushion upper surface, seat back and head restraint.




7. Mark the range of seat travel

Prior to marking the seat, move the seat through its full range of motion using all available controls. Separately, operate each control to determine whether it moves the seat and/or seat cushion primarily in the fore-aft or up-down directions.

| Seat Fore/Aft Positioning | Total Fore/Aft Travel | Placed in Position # |
|---------------------------|-----------------------|----------------------|
| Struck Side Rear Seat | FIXED ————— | |
| Non-Struck Side Rear Seat | FIXED ————— | |
| Rear Center Seat | FIXED ————— | |




7.1 Mark a point (seat cushion reference point - **SCRCP**) on the side of the seat cushion that is between 150 mm and 250 mm from the front edge of the seat cushion. For seat cushions that move up and down independently from the seat housing, mark the point on the side of the cushion in an area that will not be obscured by the seat housing when the seat cushion is at its lowest height position.



7.2 Draw a horizontal line (seat cushion reference line - **SCRL**) through the **SCRCP**.




7.3 Use only the controls that primarily move the seat in the fore-aft direction to move the **SCRCP** to the rearmost position.




7.4 If the seat cushion adjusts fore-aft, independent of the seat back, use only the controls that primarily move the seat cushion in the fore-aft direction to move the **SCRCP** to the rearmost position.

N/A No independent fore-aft seat cushion adjustment



7.5 Use any part of any control, other than the parts just used for fore-aft positioning, to determine the range of angles of the **SCRL** and to set the **SCRL** at mid-angle. Record the maximum, minimum and midangles in the table below;


| SCRL° | Max | Min | Mid |
|---------------------------|-------------|-----|-----|
| Struck Side Rear Seat | FIXED ————— | | |
| Non-Struck Side Rear Seat | FIXED ————— | | |
| Rear Center Seat | FIXED ————— | | |




7.6 If the seat and/or seat cushion height is adjustable, use any part of any control other than the parts which primarily move the seat or seat cushion fore-aft, to put the **SCR**P in its lowest position with the **SCRL** angle at the mid-angle found in 7.5.




N/A No independent fore-aft seat cushion adjustment




7.7 Use only the controls that primarily move the seat in the fore-aft direction to verify the seat is in the rearmost position.



7.8 Use only the controls that primarily move the seat in the fore-aft direction to **mark** the fore-aft seat positions. **Mark** each position so that there is a visual indication when the seat is at a particular position. For manual seats, move the seat forward one detent at a time and **mark** each detent. For power seats, **mark** only the rearmost, middle, and foremost positions. Label three of the positions with the following: F for foremost, M for mid-position (if there is no mid-position, label the closest adjustment position to the rear of the mid-point), and R for rearmost.




7.9 Use only the controls that primarily move the seat in the fore-aft direction to move the **SCR**P to the rearmost position.




7.10 Use any part of any control, other than the parts which primarily move the seat or seat cushion fore-aft, to find the maximum, minimum, and middle height of the **SCR**P with the **SCRL** at the mid-angle determined in 7.5 by measuring from the **SCR**P to a reference point on the floor pan or sill. Record the maximum, minimum and middle heights on the table below.




N/A No independent fore-aft seat cushion adjustment




7.11 Use only the controls that primarily move the seat and/or seat cushion in the fore-aft direction to place the **SCR**P at the mid-fore-aft position.



7.12 Use any part of any control, other than the parts which primarily move the seat or seat cushion fore-aft, to find the maximum, minimum, and middle height of the **SCR**P with the **SCRL** at the mid-angle determined in 7.5 by measuring from the **SCR**P to a reference point on the floor pan or sill. Record the maximum, minimum and middle heights on the table below.




7.13 Use only the controls that primarily move the seat in the fore-aft direction to place the **SCR**P at the full forward position.



7.14 Use any part of any control, other than the parts which primarily move the seat or seat cushion fore-aft, to find and visually **mark** the maximum, minimum, and middle height of the **SCR**P with the **SCRL** at the midangle determined in 7.5 by measuring from the **SCR**P to a reference point on the floor pan or sill. Record the maximum, minimum and middle heights and **SCRL** mid-angle on the table below.

| Seat | SCRL Mid-Angle (7.5) | SCR P Height Position | SCR P Height (mm) | | |
|---------------------------|----------------------|-----------------------|-------------------|---------------------|---------------------|
| | | | Rearmost (7.10) | Mid-fore/aft (7.12) | Full forward (7.14) |
| Struck Side Rear Seat | FIXED | Max | FIXED ————— | | |
| | | Mid | FIXED ————— | | |
| | | Min | FIXED ————— | | |
| Non-Struck Side Rear Seat | FIXED | Max | FIXED ————— | | |
| | | Mid | FIXED ————— | | |
| | | Min | FIXED ————— | | |
| Rear Center Seat | FIXED | Max | FIXED ————— | | |
| | | Mid | FIXED ————— | | |
| | | Min | FIXED ————— | | |




8. For adjustable seat backs, position the seat back at the foremost stop. Mark each position of adjustment from the foremost to rearmost stops so that there is a visual indication when the seat back is at a particular position.

For manually adjustable seat backs (with detents), move the seat back rearward one detent at a time and mark each detent. Label the rearmost, middle, and foremost positions with the measured detent. If no middle detent exists, label the next most-rearward detent to the middle position.

For power seat backs (no detents), move the seat back rearward one degree at a time and mark each angle. Angles should be measured at the location on the seat (head restraint, seat back, plastic trim, etc.) as indicated by the manufacturer on Form No. 1. Label the rearmost, middle, and foremost positions with the measured angle.

Record the range of angles in degrees and detents in the space provided below. Visually mark and label for future reference the rear seat back angle, if adjustable, as provided by the manufacturer on Form No. 1 for the 5th percentile (SID-IIs) female dummy in a Side MDB test.

| Seat | Total Seat Back Angle Range | | Test Position from Most Upright | |
|---------------------------|-----------------------------|-----------|---------------------------------|----------|
| | Degrees | Detents * | Degree | Detent * |
| Struck Side Rear Seat | FIXED | | | |
| Non-Struck Side Rear Seat | FIXED | | | |
| Rear Center Seat | FIXED | | | |



9. Mark the seat belt upper anchorage positions

Mark for reference each vertical position of a manually adjustable seat belt upper anchorage.

Mark and label each position with the following: H for highest, M"X" for mid-positions (where "X" stands for 1, 2, 3, etc. and 1 is used for the highest mid-position), and L for lowest.



N/A No independent fore-aft seat cushion adjustment



10. Mark the steering wheel position

Is the steering wheel adjustable up and down and/or in and out?



Yes, go to 9.1



No - Check Sheet completed.



10.1 Find and **mark** for future reference each up and down position. Label three of the positions with the following: H for highest, M for mid-position (if there is no mid-position, label the next lowest adjustment position), and L for lowest.



N/A steering wheel is not adjustable up and down



10.2 Find and **mark** for future reference each -in- and -out- position. Label three of the positions with the following: F for foremost, M for mid-position (if there is no mid-position, label the next rearmost adjustment position), and R for rearmost.

H-Point Left Front Seat (Position 1):

Performed by:

David Hooper

Date:

11/16/2022

Initial:

DH

Place a piece of muslin cloth over seat area.

DH

Place H-point machine in center of seat. Note: If vehicle is a bench seat, then the center is aligned with the center of the steering column. For the passenger seat, the center is found by placing the machine the same distance outboard from the vehicle centerline as for the driver seat. If the seat is a bucket, place the H-point machine on the seat centerline.

DH

Attach leg assemblies. T-bar parallel to ground and perpendicular to vehicle centerline. T-bar set at 15.8, legs set at 16.3 for 50th percentile.

DH

Position right driver's foot on un-depressed accelerator pedal. Insert pin in right foot to ensure angle is not less than 87 degrees. Sole on pedal and heel as far forward as possible. Left knee is placed same distance from H-point machine centerline as right knee.

DH

Position knees 254 mm apart. Place feet as far forward as possible.

DH

Apply lower leg and thigh weights.

DH

Tilt back pan forward. Pull T-bar forward then release to allow machine to slide back into seat.

DH

Apply a 22 pound rearward load at the intersection of hip angle and T-bar. Apply load twice.

DH

Return back plane to seat back.

DH

Prevent H-point machine from sliding forward for the rest of the procedure.

DH

Install buttock and torso weights.

DH

Move back plane forward and rock 3 times over a 10 degree arc.

DH

Lift each leg and allow it to fall into place. Make sure seat pan is level (i.e. no roll) and return back pan to seat back.

DH

Apply force to the back pan to either: (1) Increase hip angle 3 degrees. (2) Maximum of 15 pounds.

DH

Record H-Point Machine Torso Angle in the space provided below.

DH


Record H-Point Machine Hip Point location in the space provided below.

DH

Place H-point target sticker on outside of vehicle door.

| | | |
|------------------------------------|--------|---------|
| H-Point Machine Torso Angle | 19.6 | degrees |
| H-Point Machine Hip Angle | 92 | degrees |
| Seatback Angle (Headrest Post) | +18.6 | degrees |
| Hip Point: X (fore/aft of striker) | 123.95 | mm |
| Z (above/below striker) | 262.88 | mm |

CMM Point
O/B HRP
x = 1903.63
z = -607.64

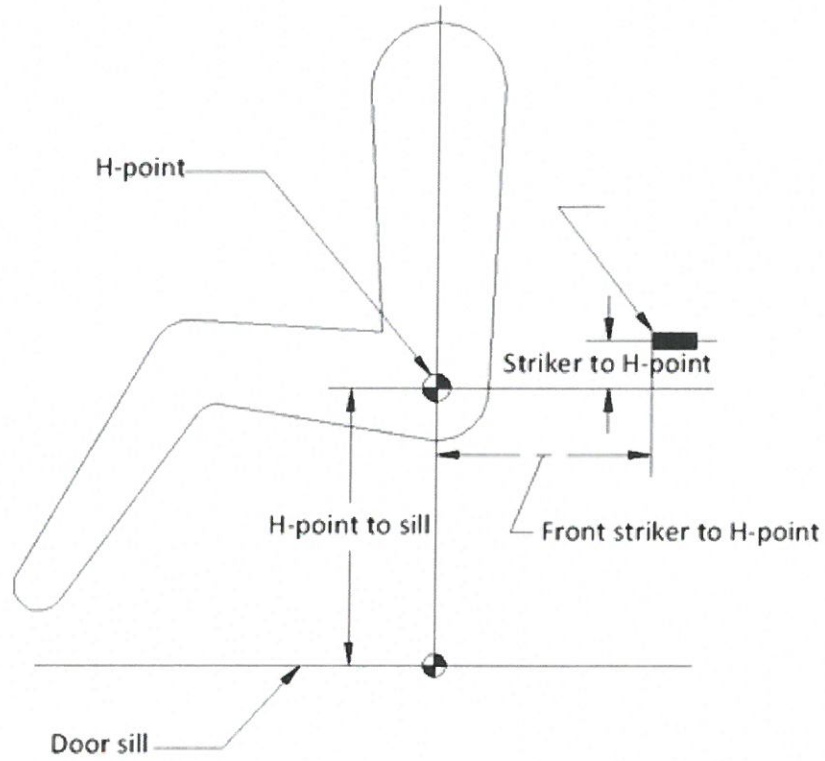

1st Row Seat Positioning – Setting Seats

| | | | |
|---------------|--------------|-------|------------|
| Performed by: | David Hooper | Date: | 11/16/2022 |
|---------------|--------------|-------|------------|

| | |
|---------------------------------|--------|
| Tape Measure Unique Identifier: | 400602 |
| Inclinometer Unique Identifier: | 401133 |

Instructions: In this section there are three sets of check marks. The first row corresponds with the front driver seat (P1), the second row corresponds with the front center seat (P5) and the third row corresponds with the front passenger seat (P2).

Setting the Seats - Driver, Front Center, and Front Passenger Seats

Set the driver, front center (if applicable), and front passenger seats accordingly:

Initial:

| P1 | P5 | P2 |
|-------------------------------------|--------------------------|-------------------------------------|
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |

1. Set the seat for a (ES-2re) test dummy
Using the reference marks on the seat, set the seat in the mid fore-aft, lowest height at mid seat cushion angle position as follows;

| | | |
|-------------------------------------|--------------------------|-------------------------------------|
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
|-------------------------------------|--------------------------|-------------------------------------|

1.1 Using the control that primarily moves the seat fore and aft, move the **SCR**P to the mid-travel (i.e., mid-fore aft) position.

| | | |
|-------------------------------------|--------------------------|-------------------------------------|
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
|-------------------------------------|--------------------------|-------------------------------------|

1.2 If the seat or seat cushion height is adjustable, other than by the controls that primarily move the seat or seat cushion fore and aft set the height of the **SCR**P to the minimum height, with the **SCR**L set as closely as possible to the mid-angle.

| | | |
|-------------------------------------|--------------------------|-------------------------------------|
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
|-------------------------------------|--------------------------|-------------------------------------|

1.3 Set the seat back angle at the manufacturer's nominal design riding position for a 50th percentile adult male in the manner specified by the manufacturer. If the position is not specified, set the seat back at the first detent rearward of 25° from vertical.

Seat Back Angle 18.6° (NO ATD)

N/A The seat back does not adjust.

| | | |
|-------------------------------------|--------------------------|-------------------------------------|
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
|-------------------------------------|--------------------------|-------------------------------------|

Using any adjustment of the head restraint, position it to its highest position. Using any adjustment of the head restraint, position it to the full forward position.

2nd Row Seat Positioning – Setting Seats

| | | | |
|---------------------------------|--------------|-------|------------|
| Performed by: | David Hooper | Date: | 11/16/2022 |
| Tape Measure Unique Identifier: | 400602 | | |
| Inclinometer Unique Identifier: | 401133 | | |

Instructions: In this section there are three sets of check marks. The first row corresponds with the rear struck side seat (left rear seat P4), the second row corresponds with the rear center seat (P6) and the third row corresponds with the rear outboard passenger seat (P3).

Setting the Seats - Rear Struck Side Seat, Rear Center, and Rear Outboard Seats

Using the reference marks determined in the previous section, set the seats accordingly for a SID-ILs ATD:

Set the seat at rearmost fore/aft position, lowest height at mid-angle.

Initial:

| P4 | P6 | P3 |
|-------|----|----|
| Fixed | | |

1.1 Using the control that primarily moves the seat fore and aft, move the **SCR**P to the rearmost position.

| | | |
|-------|--|--|
| Fixed | | |
|-------|--|--|

1.2 If the seat or seat cushion height is adjustable, other than by the controls that primarily move the seat or seat cushion fore and aft, set the height of the **SCR**P to the lowest height, with the **SCR**L set as closely as possible to the mid-angle.

N/A The seat is not adjustable.

| | | |
|-------|--|--|
| Fixed | | |
|-------|--|--|

1.3 Fully recline the seat back

N/A The seat back does not adjust.

Setting Steering Wheel & Seat Belt Adjustment

| | | | |
|---------------|--------------|-------|------------|
| Performed by: | David Hooper | Date: | 11/16/2022 |
|---------------|--------------|-------|------------|

| | |
|---------------------------------|-----------------|
| Tape Measure Unique Identifier: | 400602 |
| Inclinometer Unique Identifier: | 400 (401133) 01 |

Setting Steering Wheel, Seat Belt Anchorages, Belt Guides, etc.

Steering Wheel Adjustment - If the steering wheel is adjustable up and down and/or in and out complete the following steps to set the final steering wheel location:

Initial:

all 11. Set the steering wheel to the mid-position

Use the markings to position the steering wheel hub at the geometric center of full range of driving positions including any telescoping positions or if applicable, the next lowest detent position. Complete the following table

N/A steering wheel does not adjust.

Steering Column Adjustment

Steering wheel and column adjustments are made so that the steering wheel hub is at the center of its geometric locus it describes when it moves through its full range of motion.

| | Degrees | Fore / Aft Position (mm) |
|-----------------------------------|---------|--------------------------|
| Lowermost, Position No. 1 | 18.9 | |
| Geometric Center, Position No. 2 | 21.6 | |
| Uppermost, Position No. 3 | 24.2 | |
| Telescoping Steering Wheel Travel | | 64 |
| Test Position | 21.6 | 32 |

| | | |
|--|--------|--|
| Reference distance from ceiling to center of steering wheel. Mark point in ceiling. | 390 mm | |
| Reference distance from front of dash to steering wheel. Mark points on dash and steering wheel. | 100 mm | |

Adjustable Seat Belt Anchorages

Initial:

PH

Place adjustable seat belt anchorages in the nominal adjustment position in accordance with the manufacturer's data on Form No. 1 for a 50th percentile (ES-2re) male adult occupant and a 5th percentile (SID-IIs) female adult occupant.

Note the position of the seat belt anchorages in the space provided below.

| | Total # of Positions | Placed in Position # |
|---------------------|----------------------|----------------------|
| Driver Seat | Not HO-3 | HO - Highest |
| Rear Passenger Seat | N/A | N/A |

N/A

Seat Belt Guides: Usage of seat belt guides should be set in accordance with instructions included in the vehicle owner's manual or in Form No. 1.

Photographic Tape & Measurements

Performed by:

David Hooper

Date:

11/16/2022

Initial:

DH

Align the left edge of 25 mm (1 inch) wide yellow/black checkerboard tape along the vertical impact reference line as defined below. Reference illustrations can be found on the next page.

For passenger vehicles

| Test Vehicle Wheelbase Length | Vertical Impact Reference Line Location |
|--------------------------------|---|
| Less than or equal to 2,896 mm | 940 mm +/- 5 mm forward of wheelbase centerline |
| Greater than 2,896 mm | 508 mm +/- 5 mm rearward of front axle centerline |

$$\text{wheelbase} = \frac{LH + RH}{2}$$

$$\text{wheelbase} = \frac{2630.29 + 2628.83}{2}$$

$$\text{wheelbase} = 2629.56 \text{ mm}$$

For multipurpose vehicles, sport utility vehicles, light trucks and vans:

| Test Vehicle Wheelbase Length | Vertical Impact Reference Line Location |
|--|---|
| Less than or equal to 2,489 mm | 305 mm +/- 5 mm rearward of front axle centerline |
| Greater than 2,489 mm but less than 2,896 mm | 940 mm +/- 5 mm forward of wheelbase centerline |
| Greater than 2,896 mm | 508 mm +/- 5 mm rearward of front axle centerline |

Note: For different wheelbase versions of the same model vehicle, the vertical impact reference line may be determined by the following procedure:

- Select the shortest wheelbase version of the same model and locate the vertical impact reference line as described above.
- Measure the distance between the SgRP and the vertical impact reference line.
- Maintain the same distance between the seating reference point and the vertical impact reference line for the version being tested as that distance between the seating reference point and vertical impact reference line for the shortest wheelbase version.

DH

Measure the distance from the front axle to the edge of the tape used to denote the vertical impact reference line and record the measurement in the space provided below.


| Impact Point Location: | Units | Value |
|--|-------|---------|
| Vehicle Wheel Base (As Measured) | mm | 2629.56 |
| Wheelbase Midpoint | mm | 1314.78 |
| Vertical Impact Reference Line Location (Taken from above table) If Wheel Base is greater than 2,896 mm than use 508 mm | mm | 940 |
| Vertical Impact Reference Line (Aft of Front Axle) (Intended Impact Point) | mm | 374.78 |

$$\text{Center of Barrier} = \text{LFWP} - 374.78 - 838 = 3591.59 - 1212.78 = 2378.81$$

$$\text{Tape Edge} = 2378.81 - 12.5 = 2366.31$$

all Place 25 mm (1 inch) wide yellow/black checkerboard tape shall be placed on the vehicle such that when the barrier is properly aligned with the test for impact, the tape coincides with the vertical centerline of the barrier's impact face. See below figures.

The tape should be extended across the roof of the vehicle (90° angle to the test vehicle longitudinal centerline) to provide a reference for the overhead camera coverage.

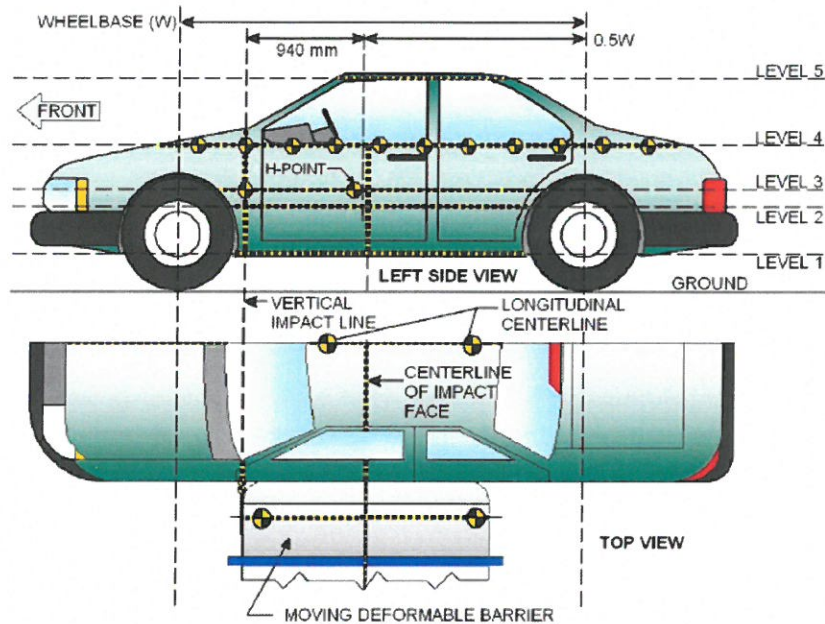

all Affix 25 mm (1 inch) wide yellow/black checkerboard tape horizontally along the impact side of the test vehicle at LEVEL 1 – Top of side sill: Affix tape along the door sill from the front to the rear wheel-wells.

all Affix 25 mm (1 inch) wide yellow/black checkerboard tape horizontally along the impact side of the test vehicle at LEVEL 2 – Occupant Hip Point: Project the location of the driver dummy's hip point laterally through the door to its exterior panel. Affix tape to the side body panels so that the tape intersects the hip point.

all Affix 25 mm (1 inch) wide yellow/black checkerboard tape horizontally along the impact side of the test vehicle at LEVEL 3 – Mid-door: Measure the height of the front door body panel at two different locations that are at least 600 mm apart. Take the average of the two measurements. Mark this point on the exterior door panel. Affix tape to the side body panels so that the tape intersects this point.

all Affix 25 mm (1 inch) wide yellow/black checkerboard tape horizontally along the impact side of the test vehicle at LEVEL 4 – Window sill: Affix tape just below the front door window sill.

all Affix 25 mm (1 inch) wide yellow/black checkerboard tape horizontally along the impact side of the test vehicle at LEVEL 5 – Top of window: Affix tape just above the top of the front door window.

Note: The following measurements should be taken along the vertical impact reference line. Vehicle measurements forward of the vertical impact reference line are negative. All measurements are in millimeters (mm). Pre-test measurements are taken when the vehicle is in the "As Tested" weight condition. The crush profile grid is established prior to the test based on an estimated impact point.

Affix Targets to the Struck side of the Test Vehicle

Initials:

VH

Place a 50 mm (2 inch) diameter target on the vehicle at mid-door height and along the left edge of the vertical impact reference line. The tip of the welding rod will be located in the center of the target.

DL

Affix targets, labeled appropriately (if applicable) to the front door or side panel to denote the hip pivot center of the test driver dummy. Use a 100 mm (4 inch) diameter target and label with "HP".

DL

Affix targets, labeled appropriately (if applicable), along LEVEL 4, window sill tape line, at every 300 mm. Use 50 mm (2 inch) diameter targets.

N/A

Affix 25 mm (1 inch) wide checkerboard tape on the hood and roof along the longitudinal centerline of the entire vehicle (excluding glazing surfaces).

DL


Affix two (4-inch) diameter targets approximately 700mm apart on the roof's longitudinal centerline.

If the vehicle has a sunroof, do not affix any targets to any glazing. Maximize the distance between the targets assuring that the targets only lie on the roof's body panel.

Roof Target Dia. 101 mm

Distance between target centers: 700 mm

4"

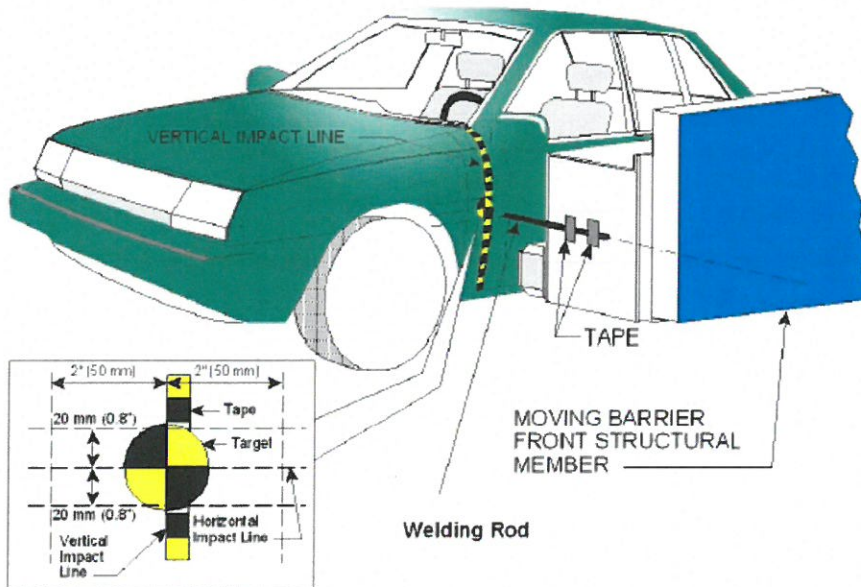

Pre-Test Measurements:

Performed by:

David Hooper / Drew Baginski

Date:

11/16/2022

Instructions: Read through the following instruction PRIOR to measuring the following locations using the FARO arm.

Vehicle Coordinate System:

- X – Rear Surface of Vehicle (+ forward)
- Y – Vehicle Centerline (+ to right)
- Z – Ground Plane (+ down)

Exterior Vehicle Measurements:



FARO Unique Identifier:

#35912

Initial:

SH

Review the below illustrations.

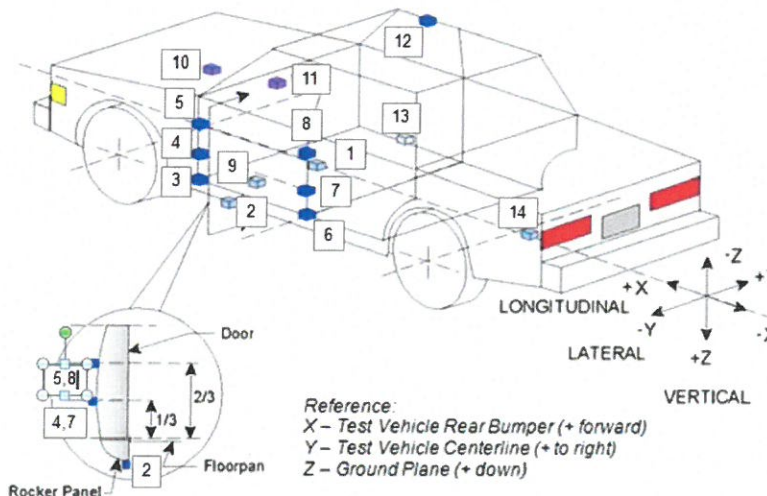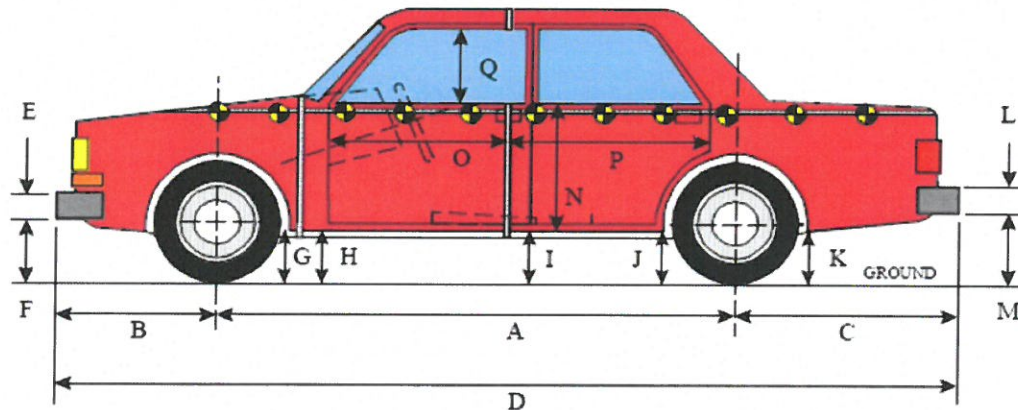

Initial:

PH Confirm vehicle is in the "As Tested" configuration.

PH Establish a fixed reference plane that is perpendicular to the vehicle's longitudinal centerline.

Ground Plane Reference Points -----

Initial:

DB Gplane - Ground Plane Reference Points Left, Front, Right and Rear.

Wheelbase / Vehicle Length -----

Initial:

DB LFW - Left Front Wheel.

DB LRW - Left Rear Wheel.

DB RFW - Right Front Wheel.

DB RRW - Right Rear Wheel.

PH RFRONT - Right Front (X19)

PH CFRONT - Center of Front (X1)

PH LFRONT - Left Front (X20)

PH RREAR - Right Rear

PH CREAR - Center of Rear

PH LREAR - Left Rear

PH NUP - N Upper Point

PH NLOW - N Lower Point

PH OFRNT - O Front Point

PH OPMID - O Rear Point / P Front Point

PH PREAR - P Rear Point

PH QUP - Front Window Opening – Take uppermost point on front window to obtain window vertical distance measurement

PH QLOW – Front Window Opening – Take lowermost point on front window to obtain window vertical distance measurement

PH RBPW - Right B Pillar Point (*Taken at vertical tangency point*)

PH LBPW - Left B Pillar Point (*Taken at vertical tangency point*)

Vehicle Floor Pan Measurements / P1 Floor Pan / Interior -----

Initial:

DH P1 STRIKER – Center of P1 Striker Bolt

Vehicle Floor Pan Measurements / P2 Floor Pan / Interior -----

Initial:

DH P2 STRIKER – Center of P2 Striker Bolt

Crush Measurements (Previously Taken in Vehicle & Photographic Targets Section)-----

Initial:

DH C1 - Vehicle Crush Measurement #1 – Sill Top

DH C2 - Vehicle Crush Measurement #2 – Occupant Hip Point

DH C3 - Vehicle Crush Measurement #3 – Mid Door

DH C4 - Vehicle Crush Measurement #4 – Window Sill

DH C5 - Vehicle Crush Measurement #5 – Window Top

Accelerometer Measurements-----

Initial:

DH ACC 1 – Right Front Sill

DH ACC 2 – Right Rear Sill

DH ACC 3 – Rear Floor Pan

DH ACC 4 – Left Rear Sill

DH ACC 5 – Left Front Sill

DH ACC 6 – Right Rear Occupant Compartment

DH ACC 7 – Left B-Pillar Low

DH ACC 8 – Left B-Pillar Mid

DH ACC 9 – Left A-Pillar Low

DH ACC 10 – Left A-Pillar Middle

DH ACC 11 – Front Seat Track

DH ACC 12 – Rear Seat Track

DH ACC 13 – Vehicle CG

Hand Measurements-----

Initial:

| | | | | |
|---|--------------|----|---|--------|
| VH | Hand measure | E | Front Bumper Thickness - <i>(The vertical height of the front bumper fascia)</i> | 138 mm |
| VH | Hand measure | F | Front Bumper Bottom to Ground - <i>(Vertical distance from ground to the bottom of the front bumper fascia)</i> | 403 mm |
| VH | Hand measure | G | Sill Height at Front Wheel Well - <i>(Vertical distance from ground to the sill at the front wheel well opening)</i> | 200 mm |
| VH | Hand measure | H | Sill Height at Front Door Leading Edge - <i>(Vertical distance from ground to the sill at the front door seam)</i> | 208 mm |
| VH | Hand measure | I | Sill Height at B-Pillar - <i>(Vertical distance from ground to the sill in line with the front door striker or B-pillar if no striker exists)</i> | 214 mm |
| VH | Hand measure | J1 | Sill Height at Rear Wheel Well - <i>(Vertical distance from ground to the sill at the rear wheel well opening)</i> | 215 mm |
| VH | Hand measure | J2 | Pinch Weld Height at Rear Wheel Well - <i>(Vertical distance from ground to the pinch weld at the rear wheel well opening)</i> | 190 mm |
| VH | Hand measure | K | Sill Height Aft of Rear Wheel Well - <i>(Vertical distance from ground to the vehicle sheet body at the rear of the rear tire's wheel well)</i> | 221 mm |
| VH | Hand measure | L | Thickness or height of rear bumper at center. | 191 mm |
| VH | Hand measure | M | Distance from bottom of bumper to ground at center. | 385 mm |
| Tape Measure Unique Identifier Used to conduct measurements | | | | — |

Initial:

DH

Record the following information below (needed to generate the QuickLook).

Wheelbase Left Side

2630.29 mm

Wheelbase Right Side

2628.83 mm

Vehicle Width at B-Pillar

1790.34 mm

Vehicle Length Left Side


4406.87 mm

Vehicle Length Center

4501.68 mm

Vehicle Length Right Side

4409.87 mm



Vehicle Instrumentation

Instrumentation Installation:

Performed by: Will Brokx Date: 11-16-22

Note: It is the Technician's responsibility to verify that all instrumentation and associated wiring is in good working condition and calibrated.



Initial:

- WB Review the customer's test request or statement of work for the list of desired instrumentation.
- WB Create Calspan Excel channel request.
- WB Generate photo placards.
- WB Verify that the placards match the desired instrumentation list.
- WB Print and cut out photo placards.
- WB Acquire instrumentation, verify functionality, that it has been calibrated and that its calibration has not expired or is within two weeks of needing to be calibrated.
- WB Install instrumentation in the following locations using two-face tape, hot melt or screws as appropriate. Use single accelerometers that have been pre-assembled as dual or tri-packs as appropriate). Then take a close-up photo of the installed instrumentation and corresponding photo placard followed by an overall photo. See Figure 5 below for vehicle accelerometer locations.

| Install | Photo Close | Photo Overall |
|---------|-------------|---------------|
|---------|-------------|---------------|

- | | | | |
|-------------------------------------|-------------------------------------|-------------------------------------|---|
| <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <i>Right Sill @ Front Seat</i> – Triaxial accelerometer mounted on the opposite side to the impacted side sill at the front seat to provide Ax, Ay and Az data: ACC 1 – Location 1. |
| <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <i>Right Sill @ Rear Seat</i> – Triaxial accelerometer mounted on the opposite side to the impacted side sill at the rear seat to provide Ax, Ay and Az data: ACC 2 – Location 2. |
| <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <i>Rear Floor Pan Above Axle</i> – Triaxial accelerometer mounted on the rear floor pan above the axle to provide Ax, Ay and Az data: ACC 3 - Location 3. |
| <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <i>Left Sill @ Rear Door</i> – Uniaxial accelerometer mounted on the impacted side sill in line longitudinally with the center of the widest portion of the front door and located under the sill inward of pinch welds to provide Ay data: ACC 4 – Location 4. |
| <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <i>Left Sill @ Front Door</i> – Uniaxial accelerometer mounted on the impacted side sill in line longitudinally with the center of the widest portion of the rear door and located under the sill inward of pinch welds to provide Ay data: ACC 5 – Location 5. |

- Right Rear Occupant Compartment* – Uniaxial accelerometer mounted in the rear occupant compartment to provide Ay data: ACC 6 – Location 6.
- Left B-Post Lower* – Uniaxial accelerometer mounted on the impacted lower B-Pillar (located 1/3 the distance from the floor to the bottom of the door's window opening) to provide Ay data: ACC 7 – Location 7.
- Left B-Post Middle* – Uniaxial accelerometer mounted on the impacted middle A-Pillar (located 2/3 the distance from the floor to the bottom of the doors window opening) to provide Ay data: ACC 8 – Location 8.
- Left A-Post Lower* – Uniaxial accelerometer mounted on the impacted lower A-Pillar (located 1/3 the distance from the floor to the bottom of the doors window opening) to provide Ay data: ACC 9 – Location 9.
- Left A-Post Middle* – Uniaxial accelerometer mounted on the impacted middle A-Pillar (located 2/3 the distance from the floor to the bottom of the doors window opening) to provide Ay data: ACC 10 – Location 10.
- Front Seat Track* – Uniaxial accelerometer mounted on the front seat track nearest the impacted door and approximately aligned with the driver hip point to provide Ay data: ACC 11 – Location 11.
- Rear Seat Track or Structure* – Uniaxial accelerometer mounted on the rear seat structure (if easily accessible) nearest the impacted door and approximately aligned with the dummy's hip pivot point to provide Ay data: ACC 12 – Location 12.
- Vehicle CG* – One triaxial accelerometer mounted to the floorpan at the longitudinal and lateral location of the vehicle CG to measure accelerations in the x, y, and z directions: ACC 13 - Location 13.

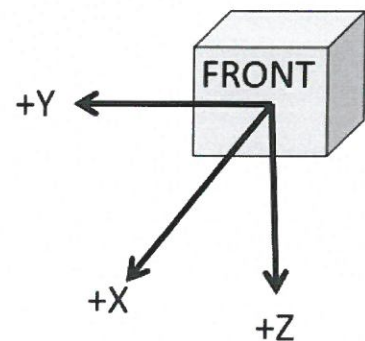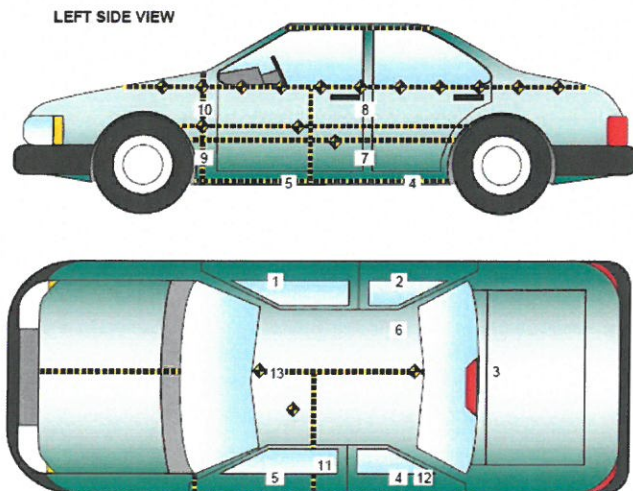

Onboard Test Equipment Installation:

Performed by:

Kyle & Tom

Date:

11/22/22

Note: It is the Technician's responsibility to verify that all instrumentation and associated wiring is in good working condition and calibrated. Verify that all DAU's calibration has not expired. This section MUST be completed prior to installation to prevent unnecessary delays.

Initial:

VH

Inspect cables for damage prior to installation.

VH

When installing any instrumentation cables, leave slack for strain relief.

TE + Kyle

Connect 4 DAU's in series with crash link cables, starting with breakout box.

TE

Plug in all accelerometer LEMO connectors into DAU's, ensuring a tight fit. Verify lock engaged.

Plug in battery monitor cable, ensuring a tight fit. Verify lock engaged.

Connect 2 trigger BNC connectors into breakout box.

Connect WIFI to Ki-Hub interface.

Connect abort to breakout box power wire.

Connect LED light LEMO connector to battery box.

TB

Connect trigger 1 port to camera in port using corresponding cable.

VH

Check functionality of SRS light.

Section
6

Verification of Vehicle, ATD & Facility Readiness

Instruction: Insert ATD and Facility checklists after this tab.



Inserted ATD Checklist.



Inserted Facility Checklist.



Inserted MDB Checklist.

Weight – As Tested Condition:

Performed by:

Luke C + Jeff W

Date:

11-21-22

Initial:

LC JW Load the appropriate dummies (with umbilical cord) into the appropriate seating position.
(Ask ATD Lab for specific ATD Weight)



Reference weight: Driver 178.6 lbs.



Reference weight: Left Rear Passenger 110.2 lbs.

LC JW Weigh the vehicle at each wheel and add the weights to determine the “As Tested” weight.

LC Record the weight measurements and scale unique identifier in the space provided below.

LC Verify that the “As Tested” weight is within the Target Test Weight (min) and Target Test Weight (max) determined in the Weight – As Delivered section.

Note: Adjust the weight of the test vehicle by either adding ballast or removing vehicle components in accordance with the manufacturer’s data provided by the COTR on Form No. 1. If the calculated Test Vehicle Target Weight is exceeded immediately contact the Technical Director.

LC Record the weight of any added ballast in the space provided on the next page.

N/A Record any vehicle components that were removed and their associated total weight in the space provided on the next page.

LC Check to make sure the “As Tested” weight is similar to the “Fully Loaded” weight distribution

LC Record the Unique Identifier of the weight scales used to weigh the vehicle in the box below.

Weight Scales Unique Identifier

400323

| | Units | As Tested | | Total |
|--------|-------|----------------------|----------------------|--------------------------|
| | | Front Axle | Rear Axle | |
| Left | kg | 494 | 367 | W _{Left} = 861 |
| Right | kg | 477 | 345 | W _{Right} = 822 |
| Ratio | % | 57.7 % | 42.3 % | |
| Totals | kg | W _F = 971 | W _R = 712 | 1683 |

Target Test Weight Minimum

1682.8

kg

Target Test Weight Maximum

1687.3

kg

Weight of ballast added to meet TWTW

| Description | Weight |
|-------------|--------|
| Ballast | N/A kg |

Yes No

Does the measured As Tested Vehicle Weight lie within the required weight range (i.e. Calculated Test Vehicle Weight -4.5 kg to -9.0 kg)?

If no, indicate in the space provided below the equipment that was removed and its associated weight to meet this requirement.

Equipment that was removed to meet test weight:

N/A

Explanation for equipment removal: ²

N/A

Vehicle components removed to meet TWTW

| Description | Weight |
|-------------|--------|
| N/A | kg |
| | kg |
| | kg |

CG – As Tested Condition:


Performed by: OP Date: 11/22

Initial:

OP


Measure and record the vehicle distances and copy the weights from the previous section in the space provided below in order to calculate the vehicle CG aft of the front axle and left (+) / right (-) from the longitudinal centerline.

Center of Gravity Calculation:

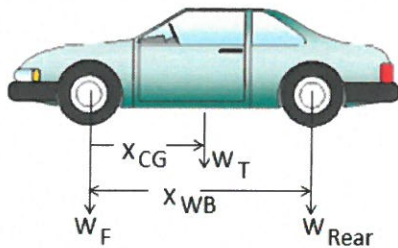

$$X_{CG} = \frac{X_{WB} \times W_{Rear}}{W_{Total}}$$

(From Front Axle)

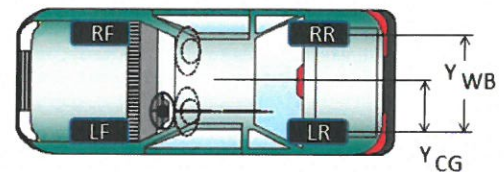

$$Y_{CG} = \frac{Y_{WB} \times W_{Right}}{W_{Total}}$$

(From Left Wheel Centerline)

$$X_{CG} = \frac{X_{WB} \times W_{Rear}}{W_{Total}}$$

1113 mm = $\frac{2630 \text{ mm} \times 712 \text{ kg}}{1683 \text{ kg}}$

$$Y_{CG} = \frac{Y_{WB} \times W_{Right}}{W_{Total}}$$

1518 mm = $\frac{1518 \text{ mm} \times 822 \text{ kg}}{1683 \text{ kg}}$

741

| Test Vehicle Center of Gravity (CG) | Units | As Tested | |
|--|-------|-----------|-----------------|
| Vehicle CG (Aft of Front Axle) | mm | 1113 | X _{CG} |
| Vehicle CG (Left (+) / Right (-) from Longitudinal Centerline) | mm | 18 | Y _{CG} |

Vehicle Verification:

Engineer's Name:

QP

Date:

11/22

Complete the following steps before transporting the vehicle to the Crash Hall.

Initial:

QP

Review and verify that all prior sections of this workbook have been completed.

✓H

Review all Pre-Test photos for content, field of view, clarity and exposure.

QP

Conduct a visual inspection of the vehicle to verify that it has been properly prepared. Note: For OEM's verify that the vehicle reflects the customer's statement of work or test request.

QP

Verify that the SRS light is not illuminated.

QP

Verify Non-struck side airbags have been disabled.

QP

Verify battery voltage is sufficient without charger – Wait 1 minute.

QP

12 Volt or HEV State of Charge

QP

Verify that the vehicle has the proper instrumentation.

QP

Verify that ATD is ready and have the proper instrumentation. Verify tilt sensor is installed in ES-2re.

N/A

Electric vehicle SOC check.

QP

Verify that placards have been placed on vehicle and contain up-to-date information.

QP

Affix large placards to vehicle.

QP

Verify that small photograph placards are in test binder with vehicle.

Install Honeycomb

Performed by:

TP

Date:

11/21

Instructions: Read through the following instruction PRIOR to measuring the following locations. See reference images on next page.

Exterior MDB Measurements:

The maximum static crush of the MDB's honeycomb face shall be measured pre-test in the longitudinal direction at the following vertical installation height locations (see **Figure 14 Below**):

- (1) Center of Bumper Level = **432 mm** above ground level
- (2) Top of Bumper Level = **533 mm** above ground level
- (3) Mid Level = **686 mm** above ground level
- (4) Top-Stack Level = **813 mm** above ground level

Pre-test measurements are taken (from a reference plane perpendicular to and 1,000 mm from the MDB's longitudinal centerline) across the barrier face at 100 mm intervals at each of the four levels specified.

Initial:

-  Take Level 1 measurements every 100 mm (i.e. L1 800ROC to L1 800LOC) – Center of Bumper Level
-  Take Level 2 measurements every 100 mm (i.e. L2 800ROC to L2 800LOC) – Top of Bumper Level
-  Take Level 3 measurements every 100 mm (i.e. L3 800ROC to L3 800LOC) – Mid Level
-  Take Level 4 measurements every 100 mm (i.e. L4 800ROC to L4 800LOC) – Top-Stack Level

MDB Photographic Targets and Tape:

Performed by:

VH

Date:

11/21

See reference images on next page.

Initial:

VH

Place 25 mm (1 inch) wide yellow/black checkerboard tape along the top of the honeycomb barrier face centerline.

VH

Place 25 mm (1 inch) wide yellow/black checkerboard tape along front of the honeycomb barrier face centerline.

VH

Place 25 mm (1 inch) wide yellow/black checkerboard tape along the top of the left edge of the honeycomb barrier face, to align with the vertical impact reference line of the test vehicle.

VH

Place 25 mm (1 inch) wide yellow/black checkerboard tape along the front of the left edge of the honeycomb barrier face, to align with the vertical impact reference line of the test vehicle.

VH

Place two [102 mm diameter (4")] targets on top of the barrier face 400 mm from the barrier centerline.

VH

Verify [102 mm diameter (4")] photographic target on the MDB at the rear cross member accelerometer location on the left side of the frame.

VH

Verify CG marker and other known location markers are visible and labeled on the MDB in the overhead view.

Align Vehicle & MDB

Performed by: QF Date: 1/20

Initial:

- QF Transport vehicle to South Crash Hall and attach battery charger.
- QF Place placards on vehicle.
- VH Verify that vehicle's tire pressures match the tire pressures listed on the tire placard. If a tire is low, add air and notify Test Engineer.

| Tire Pressures | Units | LF | RF | LR | RR |
|----------------|-------|-----|-----|-----|-----|
| As Tested | kpa | 280 | 280 | 260 | 260 |

Initial:


- VH Position vehicle on the side impact pad along 27 degree line and align with MDB.

Note: When the MDB is properly positioned such that it is contacting the vehicle at the initial point of contact along struck side of the vehicle, strike a plane perpendicular to the ground that is coincident with the MDB impact face and is parallel to the vehicle's longitudinal centerline. Accordingly, this plane should form an angle of 63 degrees (± 0.5 degrees) with the direction of forward motion of the MDB.

- QF Mark the floor at this location. This line should extend past the front and rear of the vehicle when it is properly positioned.

- VH Hold vehicle in place with parking brake.
- QF Place automatic transmission in NEUTRAL, manual in SECOND gear
- QF Check if vehicle attitudes fall into test range. (If attitude is lower than fully loaded condition, vehicle wheels may need to be momentarily lifted off ground)
- QF Attach plumb bobs to center of front and rear vehicle bumpers.
- QF Mark cement beneath vehicle plumb bobs
- QF Re-attach battery charger to vehicle.
- VH Attach sharpened welding rod along the left side vertical surface of the honeycomb barrier in the horizontal plane level with the mid-door of the test vehicle (Level 3 target). Welding rod shall be positioned and attached with duct tape so as to contact the test vehicle body sheet metal during pre-test setup when MDB is positioned against the side of the test vehicle. The tip should be located in the center of the target.

Continued on next page.

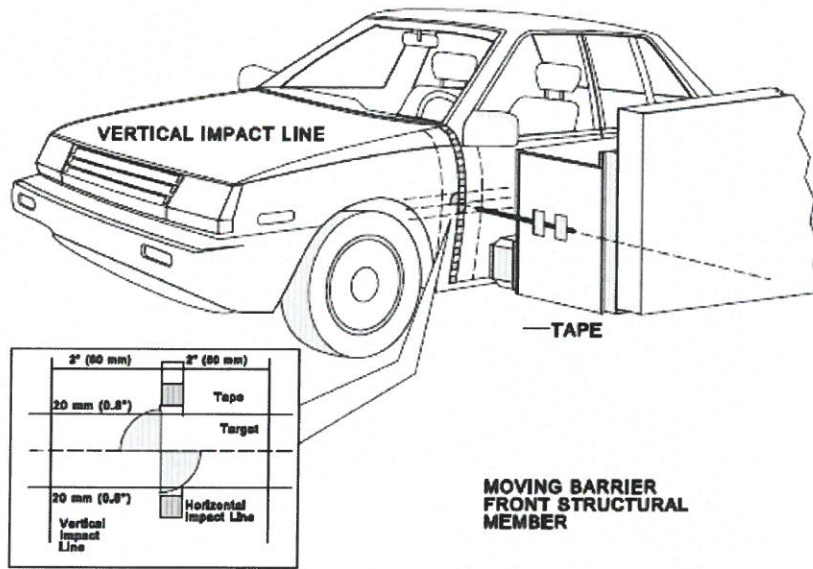

Initial:

QP Place inch tape on barrier sides at H-point level

QP Measure and record the vertical height of level 3 impact targets


Left Side: 470 mm

AK Check speed trap and barrier release distance

VH Locate camera trigger on floor

VH Confirm welding rod will not contact trigger first.

VH Inspect and take the necessary steps so that the Crash Hall is neat, clean, and arranged in an orderly manner.



High Speed Camera Set-Up

Camera Set-up:

Performed by:

TB

Date:

11/22/2022

General Requirements:


High-speed digital cameras that operate at a minimum speed of 1000 frames per second (fps) for at least 10 ms before the vehicle contacts the barrier and for at least 300 ms after the vehicle contacts the barrier.

Glare or lights showing on any glass area (closed windows or vents) must be minimized so that views of the dummies during the test are visible for video analysis.

A time zero (T(0)) impact event marker (flash or strobe unit) to indicate when the test vehicle contacts the barrier must be present in each high speed video camera view.

The test laboratory's name or logo shall not appear in any high-speed videos. Note that for the real time, the test laboratory's name shall only appear in the documentary real-time video as part of the title frame.

Locate the following cameras and set field of view:

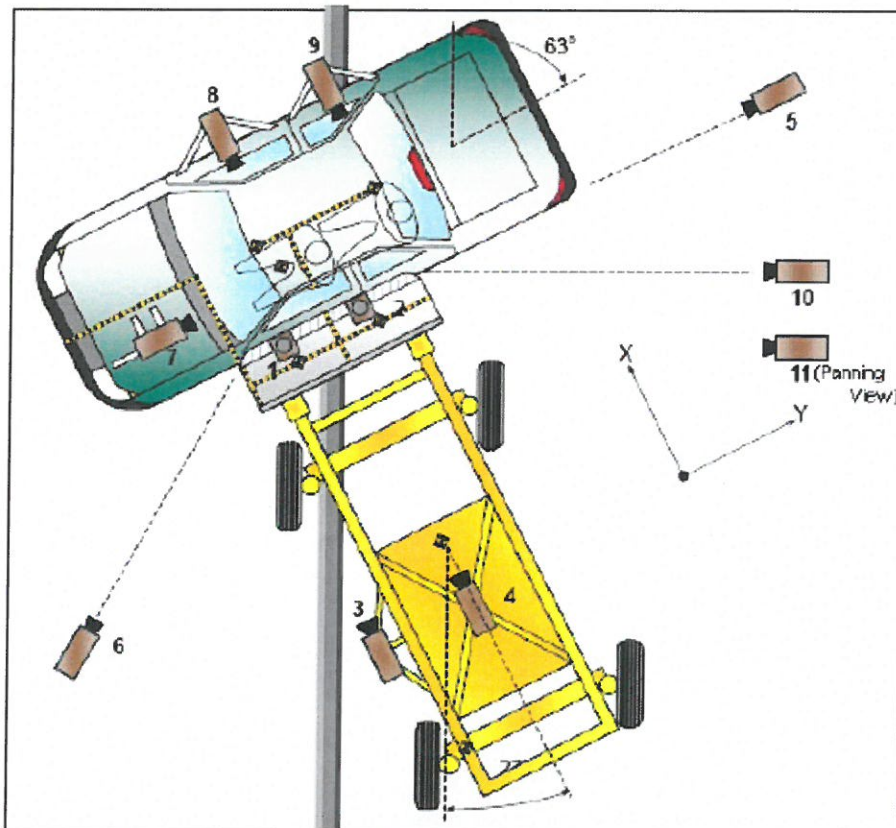


Camera 1: Overhead Wide View: High-Speed overhead camera to view target vehicle dynamics and positioned directly above the impact plane between the target vehicle and the MDB.

- TB Establish field of view (FOV); start w/ **12.5 mm** lens.
- TB Confirm placards & strobe are in FOV.
- TB Focus camera
- TB Record Camera's Unique Identifier:
10-1018-1009




Camera 2: Overhead Close-Up View: A high-speed overhead camera to provide close-up view of the impact plane (should include view of photograph targets on centerline of test vehicle and photograph targets on top of MDB barrier face) and positioned adjacent to Camera No.1.

- TB Establish field of view (FOV); start w/ **24 mm** lens.
- TB Confirm placards & strobe are in FOV.
- TB Focus camera
- TB Record Camera's Unique Identifier:
10-1018-1000

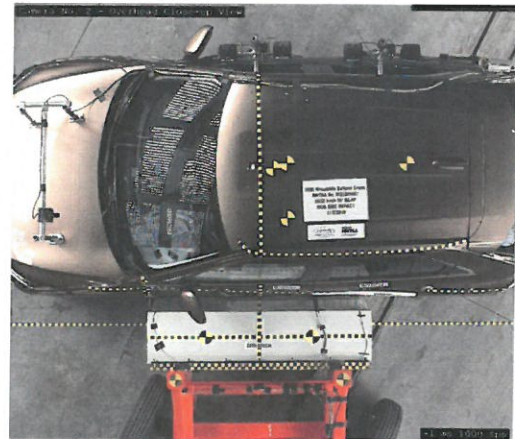


Camera 3: Impact Point: A high-speed digital camera positioned along the impactor's face left vertical edge to cover target vehicle impact point during side impact event. The initial contact between the tip of the welding rod and test vehicle shall be recorded by Camera No. 3.

- TB Establish field of view (FOV); start w/ **25 mm** lens.
- TB Confirm placards & strobe are in FOV.
- TB Focus camera
- TB Record Camera's Unique Identifier:
10-1217-0053

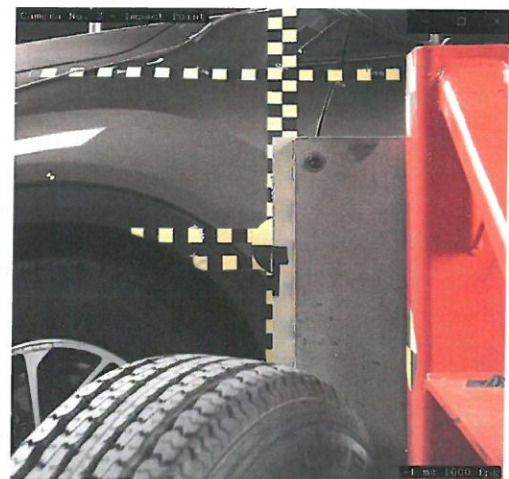

Camera 4: Struck-Side View at Impact: A high-speed digital camera, positioned on MDB's centerline to view struck side of test vehicle during the side impact event.

- TB Establish field of view (FOV); start w/ 8 mm lens.
- TB Confirm placards & strobe are in FOV.
- TB Focus camera
- TB Record Camera's Unique Identifier:
10-1018-0996

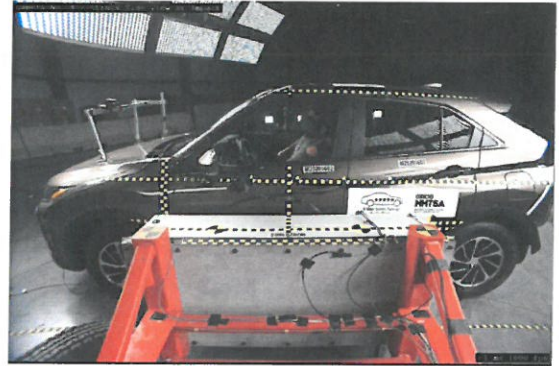

Camera 5: Rear Impact View of Struck Side: A high-speed right side view camera to cover both the MDB and the target vehicle during the side impact event.

- TB Establish field of view (FOV); start w/ 28 mm lens.
- TB Confirm placards & strobe are in FOV.
- TB Focus camera
- TB Record Camera's Unique Identifier:
10-1018-0994



Camera 6: Front Oblique Impact View of Struck Side: A high-speed left side view camera to cover the motion of the target vehicle after impact.

- TB Establish field of view (FOV); start w/ 24 mm lens.
- TB Confirm placards & strobe are in FOV.
- TB Focus camera
- TB Record Camera's Unique Identifier:
10-1118-1035



Camera 7: Driver Dummy Front View (Onboard): A high-speed camera to provide front view of the front dummy through the vehicles windshield from above the engine compartment. (Should be sufficiently raised above the hood structure and positioned such that it shows not only curtain air bag deployment in relation to the dummy's head, but also torso air bag deployment in relation to the dummy's chest, if applicable.)

TB Establish field of view (FOV); start w/ **25 mm** lens.

TB Confirm placards & strobe are in FOV.

TB Focus camera

TB Record Camera's Unique Identifier:
10-1118-1032

TB Verify all mounts and piping have been pinned and secured.



Camera 8: Driver Dummy Side View (Onboard): A high-speed camera to view across the test vehicle's occupant compartment to record the lateral motion of the front dummy during and after side impact.


TB Establish field of view (FOV); start w/ **12.5 mm** lens.

TB Confirm placards & strobe are in FOV.

TB Focus camera

TB Record Camera's Unique Identifier:
10-1018-1011

TB Verify all mounts and piping have been pinned and secured.

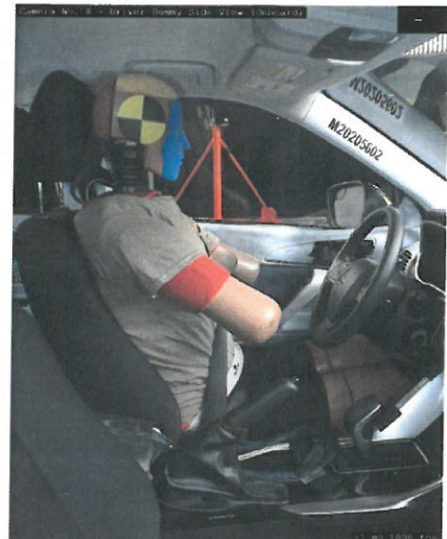

Camera 9: Rear Passenger Dummy Side View

(Onboard): A high-speed camera to view across the test vehicle's occupant compartment to record the lateral motion of the rear dummy during and after side impact.

- TB Establish field of view (FOV); start w/ **12.5 mm** lens.
- TB Confirm placards & strobe are in FOV.
- TB Focus camera
- TB Record Camera's Unique Identifier:
10-1018-1029
- TB Verify all mounts and piping have been pinned and secured.



Camera 11: Real-Time Pan View of Impact: Real-time (24-30 fps) camera to provide the following pre-test, test, and post-test coverage.

- TB Establish field of view (FOV).
- TB Confirm placards & strobe are in FOV.
- TB Focus camera (Focus on ATD's and not placards)
- TB Record Camera's Unique Identifier:
Panasonic 7



Camera Location - Data Sheet:


Performed by: TB Date: 11/22/2022

Camera Locations:

| No. | Camera View | Location | | | Lens (mm) | Operating Frame Rate |
|--|---|--------------|--------|--------|----------------|----------------------|
| | | X (mm) | Y (mm) | Z (mm) | | |
| 1 | Overhead Overall | 0 | -390 | -8230 | 12.5 | 1000 |
| 2 | Overhead Close-Up | 0 | 0 | -8380 | 24 | 1000 |
| 3 | Impact Point Close-up (MDB) | | | | 25 | 1000 |
| 4 | Centerline of Impact (MDB) | | | | 8 | 1000 |
| 5 | Right Side View | -3235 | -5982 | -1419 | 24 | 1000 |
| 6 | Left Side View | 0 | 8771 | -1540 | 24 | 1000 |
| 7 | Front Seat Occupant – Frontal View (OB) | | | | 25 | 1000 |
| 8 | Front Seat Occupant – Side View (OB) | | | | 8 | 1000 |
| 9 | Rear Passenger – Side View (OB) | | | | 8 | 1000 |
| 10 | Real Time Coverage | | | | 200m | 30 |
| Measuring Device Unique Identifier: | | <u>Fluke</u> | | | <u>400 618</u> | |

***COORDINATES**

Specifically, the X and Y coordinates shall reference the designated impact point on the target vehicle's struck side and the Z coordinate shall reference the ground (+X = forward of impact, +Y = right of impact, +Z = Down). The coordinate system shall be aligned with the test vehicle's struck side.

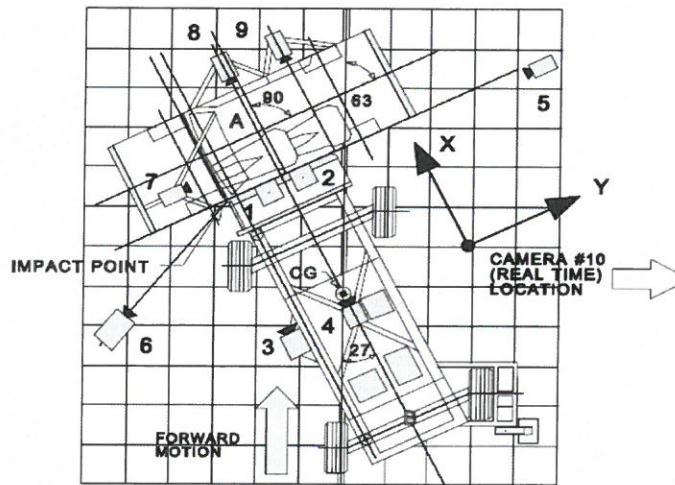

Camera Control Software

Performed by:

TB

Date:

11/22/2022

Instructions: Verify the following software settings and functions are correct

Initial:

- TB Appropriate software exposure settings (determined during exposure setup with overhead lights on)
- TB Color balance and check corrections (performed during exposure setup with overhead lights on)
- TB Pre and post-trigger recorded frames – minimum 10 pre-trigger, 300 post-trigger
- TB Record mode is 'circular', trigger configuration is 'SWC'
- TB Trigger checks are performed and all cameras trigger properly
- TB Auto download is activated and set to download to correct file path on control PC
- TB After all configuration settings are set, camera configuration is saved
- TB Download to SD card on camera

Section

8

Test Set-up & Execution

Data Acquisition Software Setup:

Performed by:

Tom Eberhardt

Date:

11/22/22

Initial:

TE Verify signals from critical channels are operational and reasonable BEFORE installing ATD.

Yes No

MA Verify firing of airbag(s) with customer, or monitoring and confirm timing pretensions.

TE Load the Crash Test Plan.

TE Verify Test Plan has been reviewed by process engineer and customer.

Process Engineer Approval:

AK

Date:

11/22/22

TE Place copy of Test Plan after this page for reference.

TE Verify dummies are attached to data acquisition boxes and are grounded.

TE Verify crash link cables are installed.

TE Verify communication cables are attached to the vehicle.

TE Verify wireless box is communicating with DAU's

TE Verify ^{PLS}KT interface shows 30-36 volts at the vehicle.

Record Vehicle 1 Voltage *12.2V*

Record Vehicle 2 Voltage: *N/A*

TE Verify KT data channels CAC's and polarities.

TE Add the ES-2re, SID-IIs, Vehicle, and Mobile Deformable Barrier assemblies to the Signals tab.

TE Verify vehicle is communicating with DAU's.

TE Verify mobile deformable barrier is communicating with DAU's.

TE Select Auto-ID from the Signals tab and verify there are no transducers identified.

TE Perform electrical check on Signals tab and verify there are no errors.

Record Number of Channels: *70*

TE Perform electrical check on Samplers tab and verify there are no errors.

TE Record Vehicle DAU Serial Numbers: *SPB592* *SPB355* *SPB352*

TE Record Mobile Deformable Barrier DAU Serial Number: *N/A*

TE Perform electrical check on Triggers tab to test the trigger and verify there are no errors.

MA Tie down umbilicals and verify adequate cable slack.

Pre-Test Photos & Video Prior to Seating:

| | | | |
|---------------|----|-------|--|
| Performed by: | JH | Date: | |
|---------------|----|-------|--|

Note: Clear and properly focused digital still photographs in .jpg format with a minimum dots-per-inch (DPI) of 180 shall be taken. A vehicle information placard placed parallel with the camera, identifying the test vehicle model as well as the barrier and NHTSA number, along with an indication of whether the photo was taken pre-test shall appear in each photograph and be legible. All photographs must be in landscape view / orientation. Glare or light from any illuminated or reflective surface shall be minimized while taking photographs. Reference sample photo set.

Initial: Video of MDB:

JH Overhead View of MDB

Initial: Photos of Vehicle against Barrier:

JH No. 15 – Pretest Overhead View of MDB Positioned Against Impact Side of Test Vehicle at Impact Location.

JH Move MDB back from vehicle and then take below photos and real time video.

Initial: Photos of MDB:

JH No. 7 – Pretest Frontal View of Impactor Face

JH No. 13 – Pretest Top View of Impactor Face

JH No. 9 – Pretest Left Side View of Impactor Face

JH No. 11 – Pretest Right Side View of Impactor Face

Initial: Video of MDB

TB Left side view of MDB

TB Right side view of MDB

TB Front view of MDB

Initial: Vehicle Surrounds

JH No. 1 – Pretest Frontal View of Test Vehicle

JH No. 5 – Pretest Impacted Side View of Test Vehicle

JH No. 3 – Pretest Rear View of Test Vehicle

Initial:

JH Move MDB to start position, attach tow and abort cables and check onboard abort.

Positioning SID-IIs in Rear Left Position:

Performed by:

~~CR~~ VH

Date:

11/22

Initial:

Fixed 1. **Set the seat at rearmost fore/aft position, lowest height at mid-angle**

Fixed 1.1 Using the control that primarily moves the seat fore and aft, move the **SCR**P to the rearmost position.

Fixed 1.2 If the seat or seat cushion height is adjustable, other than by the controls that primarily move the seat or seat cushion fore and aft, set the height of the **SCR**P to the lowest height, with the **SCR**L set as closely as possible to the mid-angle.

VH

N/A The seat is not adjustable.

Fixed

1.3 Fully recline the seat back

VH

N/A The seat back does not adjust.

VH

3. Place the test dummy in the seat

Position the dummy in the seat such that the midsagittal plane is coincident with the longitudinal centerline markings on the seat cushion, seat back and head restraint. Place the dummy in the seat with the legs at an angle of 120° to the thighs. The calves should not be touching the seat cushion.

VH

4. Hold down the dummy's thighs and push rearward on the upper torso to maximize the pelvic angle.

VH

5. Set the angle between the legs and the thighs to 120°.

VH

6. Set the transverse distance between the centers of the front of the knees at 160 to 170 mm. (6.3 to 6.7 inches). Center the knee separation with respect to the longitudinal centerline markings of the seat cushion

VH

Record Knee Separation 165

VH

7. Push rearward on the dummy's knees until the pelvis contacts the seat back, or the backs of the calves contact the seat cushion, whichever occurs first.

VH

Pelvis contacted seat back.

VH

Calves contacted seat cushion.

VH

8. Gently rock the upper torso $\pm 5^\circ$ arc (approximately 51 mm (2 inches)) side-to-side three times.

VH

9. If needed, extend the legs until the feet do not contact the floor pan. The thighs should be resting on the seat cushion.

VH

10. With the feet perpendicular to the legs, place the heels on the floor pan. If a heel will not contact the floor pan, place it as close to the floor pan as possible.

VH

11. For vehicles without adjustable seat backs, adjust the lower neck bracket to level the head as much as possible. For vehicles with adjustable seat backs, while holding the thighs in place, rotate the seat back forward until the transverse instrumentation platform of the head is level to within $\pm 0.5^\circ$, making sure that the pelvis does not interfere with the seat bight.

4 Notches

N/A

12. If it is not possible to orient the head level within $\pm 0.5^\circ$ minimize the angle.

VH

13. Measure and set the dummy's pelvic angle using the pelvic angle gauge. The angle is set to $20.0^\circ \pm 2.5^\circ$. If this is not possible, adjust the pelvic angle as close to 20.0° as possible while keeping the transverse instrumentation platform of the head as level as possible. *20.4°*

14. Passenger foot positioning

VH

14.1 Place the passenger's feet flat on the floor pan.

N/A

14.2 If the either foot does not contact the floor pan, place the foot parallel to the floor and place the leg as perpendicular to the thigh as possible.

VH

15. Passenger arm/hand positioning

Place the rear dummy's upper arm such that the angle between the projection of the arm centerline on the midsagittal plane of the dummy and the thoracic spine centerline is $45^\circ \pm 5^\circ$.

VH

16. Seatbelt Placement

Place the seatbelt around the test dummy and fasten latch.

VH

Belt in cabling / umbilicals

Head C.G. to structure

$$x = 32 \text{ mm}$$

$$z = 310 \text{ mm}$$

Positioning ES-2re Male in Driver Position

Performed by:

Vit

Date:

11/22

Initial:

- 7. Place the test dummy in the seat
- 7.1 Move the seat and seat back rearward as necessary to get the test dummy in the seat.
- 7.2 Position the test dummy in the seat such that its plane of symmetry (i.e., mid-sagittal plane) is coincident with the longitudinal centerline marking on the seat cushion, seat back and head restraint.
- 7.3 Bend the upper torso forward and then lay it back against the seat back. Push the shoulders of the dummy fully rearward.
- 7.4 Remove the foam blocks from the pelvis flesh.
- 7.5 Position the dummy so that it sits square and level in the seat.
- 7.6 Repeat steps 1 thru 1.3 within "1st Row Seat Positioning – Setting Seats" to set the seat at the mid-fore aft position
- 7.7 Maneuver the dummy's pelvis until the M3 hole on its back plate is within a circle with a radius of 10 mm round the H-point location (x,z) determined by the H-point machine.
- 7.8 Position the pelvis of the dummy such that a horizontal (lateral) line passing through the dummy's hip pivot center is perpendicular to the longitudinal center plane of the seat.
- 7.9 Measure the angle using the tilt angle sensor installed in the test dummy. Verify that the line through the dummy's hip pivot center is horizontal with a maximum inclination of $\pm 2^\circ$.
- 7.10 Is the pelvis tilt angle within spec. $\pm 2^\circ$?
 - Yes - Record the tilt angle and measure and record the X and Z location of the dummy's hip pivot center on the chart below;

| Dummy hip pivot center location | |
|---------------------------------|-----------|
| Tilt Angle | - 0.8 ° |
| X(fore/aft) of striker | 118 (mm) |
| Z(above/below) striker | -254 (mm) |

No, go back to step 7.2 and repeat steps to re-adjust the position of the test dummy.

Proper position cannot be achieved, contact COTR immediately.

VH 7.11.1 **Foot Placement - For test dummy placed in driver seating position**

VH 7.11.2 Without inducing pelvis or torso movement, place the right foot of the dummy on the un-pressed accelerator pedal with the heel resting as far forward as possible on the floor pan.

VH 7.11.3 Set the left foot perpendicular to the lower leg with the heel resting on the floor pan in the same lateral line as the right heel.

VH 7.11.4 If possible within these constraints, place the thighs of the dummy in contact with the seat cushion.

VH 7.12 **Arm Placement**

Place the dummy's upper arms such that the angle between the projection of the arm centerline on the mid-sagittal plane of the dummy and the torso reference line is $40^{\circ} \pm 5^{\circ}$.

VH 8. **Seatbelt Placement**

Place the seatbelt around the test dummy and fasten latch.

VH Belt in Cabling / umbilical's

VH Affix targets, labeled appropriately (if applicable) to the front door or side panel to denote the hip pivot center of the test driver and rear passenger dummy. Use a 100 mm (4 inch) diameter target and label with "HP".

Head to striker

$$x = 26$$

$$z = -445$$


Dummy Measurement:

| | | | |
|---------------|----|-------|-------|
| Performed by: | QP | Date: | 11/22 |
|---------------|----|-------|-------|

Initial:

- ✓ **IT** Once the dummy is properly positioned, and the seat belt has been fastened over the dummy's chest, align a 150 mm (6-inch) segment of yellow/red checkerboard tape with the outboard edge of the shoulder belt portion of the seat belt such that it will be visible in Camera View No. 11.
- ✓ **IT** Place a second 150 mm (6-inch) segment of yellow/red checkerboard tape on the dummy's chest such that it is aligned with the first segment that was placed along the outboard edge of the shoulder belt. The two checkerboard tape segments should be cut and positioned such that the colors for each square-inch section alternate on either side of the edge of the shoulder belt.
- QP Record the final position of the dummy after it is seated in the test vehicle by taking the measurements indicated on the next page (accurate to ± 3 mm).

Tape Measure Unique Identifier: _____

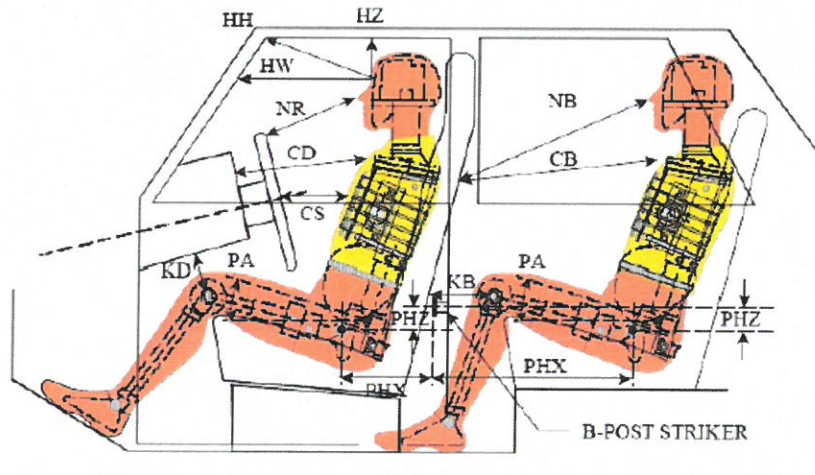

LEFT SIDE VIEW

NOTE 2-DOOR VEHICLE SHOWN.
REAR DUMMY PHX & PHZ
MEASUREMENTS FOR A 4-DOOR
VEHICLE WOULD USE THE C-POST
STRIKER AS A REFERENCE POINT

HH HEAD TO HEADER – Measure the distance from the point where the dummy's nose meets his forehead (between the eyes) to the furthest point forward on the header.

HW HEAD TO WINDSHIELD – Measure the distance from the point where the dummy's nose meets his forehead (between the eyes) to a point on the windshield directly in front of it. Use a level or plumb-bob.

HZ HEAD TO ROOF LINER – Measure the distance from the point where the dummy's nose meets his forehead (between the eyes) to the point on the roof directly above it. Use a level or plumb-bob.

NR NOSE TO RIM – Measure the distance from the tip of the dummy's nose to the closest point on the top of the steering wheel rim.

CD CHEST TO DASHBOARD – Place a tape measure on the tip of the dummy's chin and rotate 125 mm of it downward toward the dummy to the point of contact on the transverse center of the dummy's chest. Mark this point with a 25 mm (1 inch) diameter target. Measure the distance from this point to the closest point on the dashboard either between the upper part of the steering wheel between the hub and the rim, or measure to the dashboard placing the tape measure above the rim, whichever is a shorter measurement.

CS CHEST TO STEERING WHEEL – Measure the distance from the center of the steering wheel hub to the dummy's chest. Use a level. Mark this location on the dummy's chest with a 25 mm (1 inch) diameter target.

KDL/KDR LEFT AND RIGHT KNEES TO DASHBOARD – Measure the distance from the center of the knee pivot bolt's outer surface to the closest point forward acquired by swinging the tape measure in continually larger arcs until it contacts the dashboard.

KDAL/KDAR KNEE TO DASHBOARD ANGLE – Using the line representing the length measurement of the knee to the dashboard above, measure the angle between that line and the horizontal.


PAX PELVIC TILT ANGLE (X) – Measure by inserting the pelvic angle gauge into the Hip Point gauging hole (actual pivot center of the dummy's torso and thighs) on the dummy and taking this angle with respect to the horizontal. Alternatively, record the pelvic tilt angle X measured by tilt sensors installed in the test dummy.

PAY PELVIC TILT ANGLE (Y) – Measure by inserting the pelvic angle gauge into the Hip Point gauging hole (actual pivot center of the dummy's torso and thighs) on the dummy and taking this angle with respect to the vertical. Alternatively, record the pelvic tilt angle Y measured by tilt sensors installed in the test dummy.

PHX HIP POINT TO STRIKER (X) – Locate a point on the front door striker and project this point (with a level) vertically downward. Measure the distance horizontally from the pivot center of the dummy's torso and thigh to the point it intersects with the level.


PHZ HIP POINT TO STRIKER (Z) – Locate a point on the front door striker and project this point (preferably, with a level) horizontally toward the pivot center of the dummy's torso and thigh. Measure the distance vertically from the pivot center of the dummy's torso and thigh to the point it intersects with the level.

Note: The B-pillar striker will be used as the reference point for PHX & PHZ measurements.

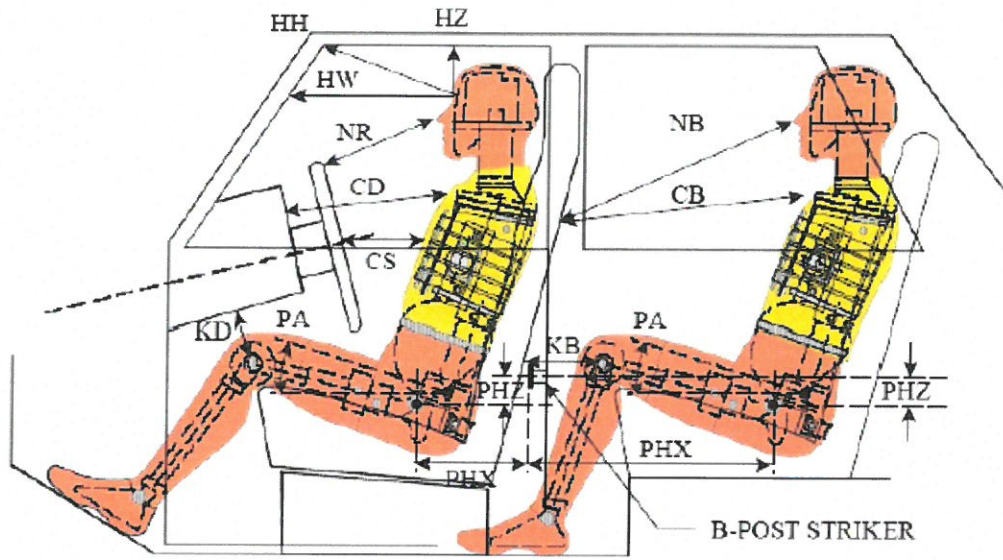
LEFT SIDE VIEW

NOTE 2-DOOR VEHICLE SHOWN.
 REAR DUMMY PHX & PHZ
 MEASUREMENTS FOR A 4-DOOR
 VEHICLE WOULD USE THE C-POST
 STRIKER AS A REFERENCE POINT

| Code | Measurement Description | ATD Driver Unique Identifier: <u>D034</u> | | ATD Passenger Unique Identifier: <u>261</u> | |
|-----------|-------------------------------|---|-----------|---|-----------|
| | | Length (mm) | Angle (°) | Length (mm) | Angle (°) |
| HH | Header to Header | 410 | | | |
| HW | Head to Windshield | 598 | | | |
| HZ | Head to Roof Liner | 169 | | 249 | |
| NR | Nose to Rim | 413 | | 483 | |
| CD | Chest to Dashboard | 580 | | 504 | |
| CS | Chest to Steering Wheel | 370 | | | |
| KDL/KDAL° | Left Knee to Dash | 243 | 36.4° | 232 | 16.5° |
| KDR/KDAR° | Right Knee to Dash | 249 | 31.5° | 212 | 15.5° |
| PAX° | Pelvic Tilt Angle (X-axis) | | 0.8° | | 0.1° |
| PAY° | Pelvic Tilt Angle (Y-axis) | | | | 20.4° |
| PHX | Hip Point to Striker (X-Axis) | 118 | | 171 | |
| PHZ | Hip Point to Striker (Z-axis) | -254 | | 266 | |

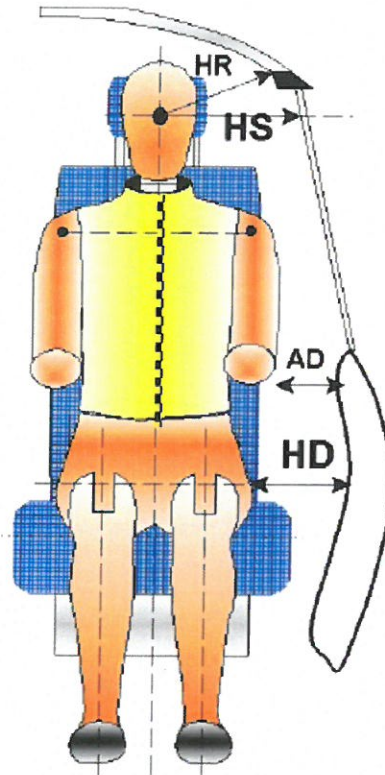

| Code | Measurement Location | Units | Driver | Rear Passenger |
|------|----------------------|-------|--------|----------------|
| HR | Head to Side Header | mm | 207 | 215 |
| HS | Head to Side Window | mm | 330 | 350 |
| AD | Arm to Door | mm | 100 | 139 |
| HD | Hip Point to Door | mm | 165 | 180 |

HR HEAD TO SIDE HEADER – Measure the shortest distance from the point where the dummy's nose meets his forehead (between the eyes) to the side edge of the header just above the window frame, directly adjacent to the dummy.

HS HEAD TO SIDE WINDOW – Measure the distance horizontally from the point where the dummy's nose meets his forehead (between the eyes) to the outside of the side window. In order to take this measurement, roll the window down to the exact height that allows a level measurement. Use a level.

AD ARM TO DOOR – Measure the distance from the center of the bottom of the outboard arm segment where it meets the driver or passenger dummy's torso to the closest point on the door.

HD HIP POINT TO DOOR – Project a point horizontally from the pivot center of the dummy's torso and thigh, outward to the edge of the pelvis plug. Measure the distance horizontally from this point to the closest point on the door panel. Use a level.

Inch Tape, Cables & Chalking:

| | | | |
|---------------|------------|-------|-------|
| Performed by: | QPEUH & TE | Date: | 11/22 |
|---------------|------------|-------|-------|

Initial:

- VH** Check cable routing. Take precaution to ensure that cable bundle is routed over the front seat armrest/console such that it allows sufficient slack and does not preclude or restrict dummy movement during impact. Duct tape may be used to secure the cable bundle to the front seat armrest/console to prevent cable damage, and to permanently set the necessary amount of slack.
- VH** Belt in cabling / umbilical's.
- TE** Zip tie down cabling in trunk.
- VH** Place inch tape on the dummy chest and shoulder belt in order to show the belt pretensioner deploy during the impact event.
- QP** Chalk ATD(s)

Parts of the anthropomorphic testing devices shall be coated with colored chalk/water solutions to show contact points with the vehicle's interior, with their own components (such as head to knee contact), and with each other. The chalk/water solution shall be applied after final dummy positioning.

Note: Face chalk should extend below the chin.

| Dummy Part | Driver |
|--|--------|
| Face (Do not paint sides) | Blue |
| Top of Head (Stop painting at skull cap) | Yellow |
| Outer Side of Head | Green |
| Back of Head (skull cap) | Red |
| Outer Shoulder | Orange |
| Outer Hip | Red |



| Dummy Part | Color |
|--------------|--------|
| Face | Blue |
| Top of Head | Yellow |
| Side of Head | Green |
| Back of Head | Red |
| Shoulder | Orange |
| Hip | Red |

Attitude - As Tested Condition:

| | | | |
|---------------|----|-------|-------|
| Performed by: | QP | Date: | 11/22 |
|---------------|----|-------|-------|

Initial:

QP

With the vehicle in the "As Tested" weight condition, place it on a flat, level surface.

Note: If the vehicle has an Auto-Leveling, the ignition must be set to the "on" position. If the vehicle is equipped with a self-adjusting hydraulic system, contact the COTR for further guidance on attitude measurements.

QP

Verify that the "As Tested" vehicle attitude measurements are equal to or between the "As Delivered" and "Fully Loaded" vehicle attitude measurements. If any "As Tested" attitude measurements do not meet this requirement, adjust the load by shifting ballast, instrumentation, and/or cameras. If, after repeating these steps, any of the "As Tested" attitude measurements do not meet the requirement, contact the Technical Director.

Note: The "As Tested" vehicle attitude measurements **shall be taken within an hour of impact** to ensure the proper attitude is met.

| Test Vehicle Attitudes and CG | Units | Fully Loaded | As Tested | Meets Requirements *** | | |
|---|-------|--------------|-----------|------------------------|-----|--|
| | | | | Yes | No | |
| Left Front | 694 | mm | 684 | 686 | Yes | |
| Right Front | 694 | mm | 693 | 693 | Yes | |
| Right Rear | 707 | mm | 682 | 682 | Yes | |
| Left Rear | 703 | mm | 672 | 676 | Yes | |
| Vehicle CG (Aft of Front Axle) | | mm | 1113 | | | |
| Vehicle CG (Left+)/Right(-) from Longitudinal Centerline) | | mm | 18 | | | |

*** The "As Tested" vehicle attitude measurements must be equal to or within +/- 10 mm of the "Fully Loaded" vehicle attitude measurements at each wheel well.

Pre-Test Photos:

Performed by:

VH

Date:

11/22/22

Note: Clear and properly focused digital still photographs in .jpg format with a minimum dots-per-inch (DPI) of 180 shall be taken. A vehicle information placard placed parallel with the camera, identifying the test vehicle model as well as the barrier and NHTSA number, along with an indication of whether the photo was taken pre-test shall appear in each photograph and be legible. All photographs must be in landscape view / orientation. Glare or light from any illuminated or reflective surface shall be minimized while taking photographs. Reference sample photo set!

Initial: Photos With Driver Positioned in Vehicle

- No. 17 – Pretest Front SID in Final Seating Position (Door Open)
- No. 18 – Pretest Front SID in Final Seating Position (Door Closed)
- No. 19 – Pretest Front SID – Opposite Side View
- No. *21 – Pretest Rear SID in Final Seating Position (Door Open)
- No. 22. – Pretest Rear SID in Final Seating Position (Door Closed)
- No. 23. – Pretest Rear SID – Opposite Side View

* - Applies to vehicles with 4 or more side doors

Pre-Test Video:

| | | | |
|---------------|----|-------|-------|
| Performed by: | TB | Date: | 11/22 |
|---------------|----|-------|-------|

A real-time camera (24-30 fps) shall be used to document the pre-test and post-test condition of the test vehicle in addition to the pre-test and post-test positions of the test dummies, including, but not limited to, the placement of the lap and shoulder belts. Particular attention must be exercised to fully document the proper closing of all vehicle doors, including any rear hatchback or tailgate.

Initial: Videos of Vehicle

- TB Impact side view of vehicle
- TB Rear view of vehicle
- TB Non-impact side view of vehicle
- TB Front view of vehicle
- TB View of gas cap being attached to filler pipe

Initial: Videos of Dummy Position (including, placement of lap and shoulder belt on the dummy)

- TB Side View of ES-2re in front seat (struck-side door open)
- TB Side view of SID-IIs in rear seat (struck-side door open)
- TB Side view of ES-2re in front seat (doors closed)
- TB Side view of SID-IIs in rear seat (doors closed)

Review Post-Test Assignments with Staff:

Performed by:

VH

Date:

11/22/22

Initial:

VH

Review with the Staff their post-impact order of events and assignments.

While the Test Engineer is taking post-test photos, the following personnel need to be completing the following tasks. During this time, please make sure customers are staying in the observation room and that each one of you stay clear in order not to be photographed. Furthermore, no instrumentation or equipment shall be removed from the test vehicle at this time. Assignments are as follows:

- Camera Personnel – Need to be downloading high speed video and verifying that acceptable video was captured by all cameras.
- Data Personnel – Need to download all instrumentation data and identify questionable and lost channels.
- Facility Personnel – Need to have equipment in hand to capture any Stoddard leaks.

Once the Test Engineer has informed the Staff that post-test photos have been taken. Assignments are as follows:

- Camera Personnel – Check and document any type of equipment damage. If video was lost or is of poor quality, inspect equipment and identify root cause. Please document all findings.
- Data Personnel – For any questionable and lost channels, inspect cabling and instrumentation to identify root cause. Please document findings.
- Facility Personnel – Clean up impact area.

Verify Vehicle & Set-Up / Go / No-Go:

| | | | |
|---------------|----|-------|-------|
| Performed by: | QP | Date: | 11/22 |
|---------------|----|-------|-------|

Initial:

- QP Review workbook for completeness
- QP Remove head level from ATD
- QP Verify plumb bobs have been removed from vehicle
- QP Verify Non-struck side airbags have been disabled
- N/A Seat Belt Guides – Usage of seat belt guides should be in accords with instructions included in the vehicle owner’s manual or in Form No. 1.
- QP Adjustable Armrests – Place any adjustable armrest in the retracted position.
- N/A Accelerator Pedal – If the vehicle has an adjustable accelerator pedal, adjust it to the full forward position.
- QP Doors – Place all doors (including a hatchback or tailgate) in the fully closed and latched position. Check instrument panel telltales just prior to the test to ensure that all doors and hatches are closed.
In all instances, all side doors should be unlocked pre-test.
- QP Door Locks – Verify that the locks on *all side doors* are unlocked.
- VLT Floor Mats - If the vehicle is equipped with optional all-weather (rubber) floor mats, remove them from prior to test. If the vehicle is equipped with carpeted floor mats, or if all-weather floor mats are standard equipment, place them in their proper locations prior to test.
- QP Windows - Verify that the driver and passenger front windows are in the fully closed position. Verify that all other windows and vents in the fully closed position unless otherwise specified by the COTR.
- QP Transmission Engagement:
 1. Manual Transmission – Place manual transmissions in neutral.
 2. Automatic Transmission – Place automatic transmissions in neutral.
- QP Parking Brake Engagement – Engage the parking brake.
- QP Verify speed traps are reset. (Primary and Secondary)
- QP Confirm fuel collectors are ready at the barrier.
- QP Escort customer to Observation Room – explain to them that they need to stay in the Observation Room until the Test Engineer comes to get them (at minimum, until after the post-test photos have been taken).
- QP Verify tow skate attached to tow hooks (visual inspection).

GP Disconnect battery charger. Verify vehicle battery power is sufficient without charger on (wait 1 minute then should have at least 12.75 volts and stable).

GP Turn real time cameras on.

GP Verify cameras are Armed and ready.

GP Ignition Switch –
 Place the key in the ignition and switch it to the “ON” position and have SRS light observed by visitor. Check to ensure that the “Airbag Readiness Indicator” shows the airbag system as being functional. If it is a PUSH start vehicle, test must be conducted in 5 min from “Key on”.

N/A If there is any delay over 5 minutes, verify SRS light is still OK.

TE Verify tow operator has completed their checklist.

AV Verify impact speed.

Initial:

- Trigger Check
- Abort Check.
- Speed Trap Check
- Verify Speed Trap Location
- Safety Check
- Reviewed all sections of this binder for completeness.
- Facility Ready for Test

| | |
|--|--------------------|
| <input checked="" type="radio"/> READY for test | Date: <u>11/22</u> |
| <input type="radio"/> NOT READY to be tested | |

| | |
|--|-------|
| <input type="radio"/> Corrections made now READY for test | Date: |
| <input type="radio"/> NOT READY for test | |

OEM Inspection of Set-up:

| | | | |
|---------------|----|-------|-------|
| Performed by: | QP | Date: | 11/27 |
|---------------|----|-------|-------|

Initial:

- QP Setup real time cameras on both sides of vehicle [Lens must be pointed toward ATD].
- QP Turn on cameras and start recording.
- QP Get OEM and notify them that they have 35 minutes to inspect dummy positioning.
- QP Escort OEM to conference room immediately after dummy positioning inspection.

Tow System & DAS Checklist:

| | | | |
|----------------------|-------|---------------|----------|
| Tow Engineer's Name: | Alex | Today's Date: | 11/22/22 |
| DAS Engineer's Name: | TOM E | Today's Date: | 11/22/22 |

Reference VERF Drive Operation Steps:

Please place copy of associated documentation following this page.

Reference VERF DAS Operation Steps:

Please place copy of associated documentation following this page.

Note Speed Requirement: 52.9 kph \pm 0.8 kph

Impact Speed:

Performed by:

QR

Date:

11/22

Initial:

QR

Remind the DAS operator to look over the Quick Look to determine whether data is near its limits or not. If yes, the operator should look at the traces (i.e. spike or wave form). If a redundant exists, the redundant data should be reviewed to determine whether its traces are the same or different. If it is determined that something is not right with the primary, the operator should use the redundant in the Quick Look and to include a note in the comments section that the redundant was used.

QR

Immediately after impact, record the time of impact in the space provided below.

VH

Photograph speed trap read-out and record values in the space provided below.

Time of Impact:

10:40

Vehicle Speed Trap Readout (Primary):

52.80

kph

Primary

52.801

kph

Redundant

Trap Location
(from barrier)

closest

mm

Speed Trap Unique Identifier:

400432

Vehicle Speed Trap Readout (Secondary):

52.75

kph

Primary

52.84

kph

Redundant

Trap Location
(from barrier)

Furthest

mm

Speed Trap Unique Identifier:

400969

Post-Test Observations – Vehicle As Is

Performed by:

QR

Date:

11/22

Instructions: Please completely fill in the below tables. If unsure, take additional photographs and please include any observations. Be as descriptive as possible.


| Dummy Contact Location | Driver | Rear Passenger |
|---------------------------|--------------------------------------|---|
| Face Contact | Curtain Airbag | none |
| Top of Head Contact | Curtain Airbag & roof liner | Curtain Airbag roof liner rear middle head rest |
| Left Side of Head Contact | Curtain Airbag | Curtain Airbag |
| Back of Head Contact | Head rest & Curtain Airbag | Curtain Airbag & roof liner & rear middle head rest |
| Left Shoulder Contact | Door trim | seat Bolster & Pelvis/torso Airbag |
| Upper Torso Contact | Pelvis & torso Airbag & seat bolster | Pelvis & torso Airbag |
| Lower Torso Contact | Pelvis & torso Airbag & seat bolster | Pelvis & torso Airbag |
| Left Knee Contact | Door trim | Door trim |
| Left Hip Contact | Pelvis & torso Airbag | seat Pan bolster |

| Supplemental Restraint System | Struck Side Driver | | Non-Struck Side Rear Passenger | |
|---------------------------------------|--------------------|----------|--------------------------------|----------|
| | Mounted | Deployed | Mounted | Deployed |
| Frontal airbag | Yes | NO | | |
| Knee airbag | Yes | NO | | |
| Side airbag 1 – Curtain Airbag | Yes | Yes | Yes | Yes |
| Side airbag 2 – Torso Airbag | No | N/A | No | N/A |
| Side airbag 3 – Torso / Pelvis Airbag | Yes | Yes | Yes | Yes |
| Seat belt pretensioner | Yes | Yes | Yes | Yes |
| Seat belt load limiter | Yes | Yes | Yes | Yes |
| Other – Seat Cushion Airbag | N/A | NO | N/A | NO |

Post-Test Hand Measurements

| | | | |
|---------------|----|-------|-------|
| Performed by: | QP | Date: | 11/22 |
|---------------|----|-------|-------|

Note: All measurements must be taken in the As Tested Condition (Fully loaded with instrumentation & ATD)

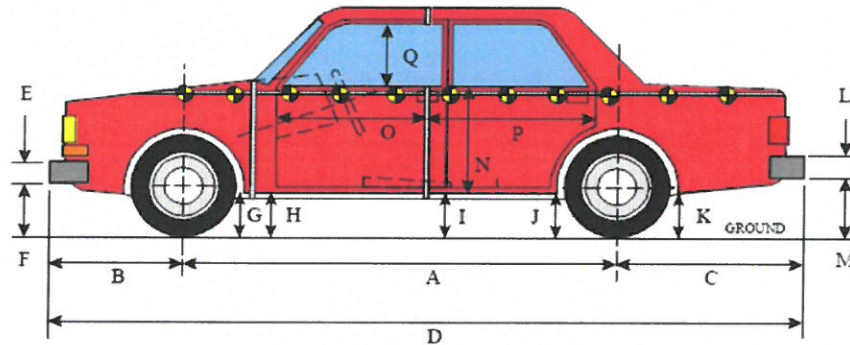

Initial:

| | | | | | |
|----|--------------|----|--|-----|----|
| VA | Hand measure | E | Front Bumper Thickness - (The vertical height of the front bumper fascia) | 138 | mm |
| VA | Hand measure | F | Front Bumper Bottom to Ground - (Vertical distance from ground to the bottom of the front bumper fascia) | 402 | mm |
| VA | Hand measure | G | Sill Height at Front Wheel Well - (Vertical distance from ground to the sill at the front wheel well opening) | 208 | mm |
| VA | Hand measure | H | Sill Height at Front Door Leading Edge - (Vertical distance from ground to the sill at the front door seam) | 216 | mm |
| VA | Hand measure | I | Sill Height at B-Pillar - (Vertical distance from ground to the sill in line with the front door striker or B-pillar if no striker exists) | 210 | mm |
| VA | Hand measure | J1 | Sill Height at Rear Wheel Well - (Vertical distance from ground to the sill at the rear wheel well opening) | 221 | mm |
| VA | Hand measure | J2 | Pinch Weld Height at Rear Wheel Well - (Vertical distance from ground to the pinch weld at the rear wheel well opening) | 192 | mm |
| VA | Hand measure | K | Sill Height Aft of Rear Wheel Well - (Vertical distance from ground to the vehicle sheet body at the rear of the rear tire's wheel well) | 235 | mm |
| VA | Hand measure | L | Thickness or height of rear bumper at center. | 191 | mm |
| VA | Hand measure | M | Distance from bottom of bumper to ground at center. | 398 | mm |

| | |
|---|---|
| Tape Measure Unique Identifier Used to conduct measurements | - |
|---|---|

Post-Test Photos – Vehicle As Is:

| | | | |
|---------------|----|-------|------|
| Performed by: | JH | Date: | 1/22 |
|---------------|----|-------|------|

Note: Clear and properly focused digital still photographs in .jpg format with a minimum dots-per-inch (DPI) of 180 shall be taken. A vehicle information placard placed parallel with the camera, identifying the test vehicle model as well as the MDB and NHTSA number, along with an indication of whether the photo was taken post-test shall appear in each photograph and be legible. All photographs must be in landscape view / orientation. Glare or light from any illuminated or reflective surface shall be minimized while taking photographs.

Initial: Vehicle

- No. 2 – Post test Frontal View of Test Vehicle
- No. 6 – Post test Impacted Side View of Test Vehicle
- No. 4 – Post test Rear View of Test Vehicle
- No. 16 – Post test Overhead View of the MDB and Test Vehicle
- No. 25 – Post-Test T(0) – Impact Event
- No. 26 – Post test Close-up View of Impact Point Target

Initial: Photos of MDB

- No. 8 – Post test Frontal View of Impactor Face
- No. 14 – Post test Top View of Impactor Face
- No. 10 – Post test Left Side View of Impactor Face
- No. 12 – Post test Right Side View of Impactor Face

Initial: With Dummy's Positioned in Vehicle

- No. 20 – Post test Front SID – Opposite Side View
- No. 24 – Post test Rear SID – Opposite Side View

Post-Test Video:

Performed by:

TB

Date:

11/27

A real-time camera (24-30 fps) shall be used to document the pre-test and post-test condition of the test vehicle in addition to the pre-test and post-test positions of the test dummies, including, but not limited to, the placement of the lap and shoulder belts. Particular attention must be exercised to fully document the proper closing of all vehicle doors, including any rear hatchback or tailgate.

Initial: MDB

- TB View of MDB and vehicle – front of vehicle
- TB View of MDB and vehicle – rear of vehicle
- TB View of MDB and vehicle – ¼ front
- TB View of MDB and vehicle – ¼ rear
- TB View of MDB and vehicle – parallel to impact door

Initial: Vehicle

- TB View of impact point – close-up
- TB View of impacted side (vehicle removed)
- TB View of front of car
- TB View of rear of car
- TB View of inside front door (dummy removed)
- TB View of inside rear door (dummy removed)
- N/A Any other vehicle anomalies if applicable

Initial: Test Dummies

- TB View of front ES-2re – parallel to impact door
- TB View of rear SID-IIs – parallel to impact door
- TB View of front ES-2re – thru opposite window
- TB View of rear SID-IIs – thru opposite window

Post-Test Photos:

| | | | |
|---------------|----|-------|-------|
| Performed by: | JH | Date: | 11/22 |
|---------------|----|-------|-------|

Note: Clear and properly focused digital still photographs in .jpg format with a minimum dots-per-inch (DPI) of 180 shall be taken. A vehicle information placard placed parallel with the camera, identifying the test vehicle model as well as the barrier and NHTSA number, along with an indication of whether the photo was taken pre-test shall appear in each photograph and be legible. All photographs must be in landscape view / orientation. Glare or light from any illuminated or reflective surface shall be minimized while taking photographs. Reference sample photo set!

Initial: Photos With Dummy's Not in Vehicle

JH No. 28 – Post test Front Seat Occupant Area showing head and torso contact regions (Test dummy removed)

JH No. 29 – Post test Rear Seat Occupant Area showing head and torso contact regions (Test dummy removed)

Post-Test Observations – Doors Open:

| | | | |
|---------------|----|-------|-------|
| Performed by: | QR | Date: | 11/27 |
|---------------|----|-------|-------|

Instructions: Please completely fill in the below tables. If unsure, take additional photographs and please include any observations and be descriptive as possible.

Doors

For each door, note whether: the door remained closed and operational, whether the door totally separated from the vehicle at the hinges or latches, the door disengaged from the latched position, the latch separated from the striker, the hinge components separated from each other, the latch or hinge systems pulled out of their anchorages, or the door was jammed shut. All applicable conditions should be noted. Video analysis should also be used to verify whether any door, including the rear hatch, opened during the impact event.

Initial:

QR

Inspect the door at the striker, if the door is open at the striker post, take measurements of the door opening at the location and record it in the space provided below.

QR

If there is a failure with any door, door component, or door opening, notify the Data Processing Engineer to include such information on the Quick Look Report.

Instructions: For the next two tables, indicate “Yes”, “No” or “N/A”

| Post Test Door Performance | Struck Side | | Non-Struck Side | | Rear Hatch / Other Door |
|--|-------------|------|-----------------|------|-------------------------|
| | Front | Rear | Front | Rear | |
| Remained closed and operational | No | No | Yes | Yes | No |
| Total separation from vehicle at hinges or latches | No | No | No | No | No |
| Latch or hinge systems pulled out of their anchorages | No | No | No | No | No |
| Latch separated from striker | No | No | No | No | No |
| Jammed shut | Yes | Yes | No | No | No |
| If door opened at striker, record width of opening at striker (mm) | 0 | 0 | 0 | 0 | 0 |

Seat Movement and Structural Observations

In the space provided below, note any seat or seat back movement or disengagement. Also, note any structural observations pertaining to the pillars, sill, window, and windshield. In particular, describe the amount of deformation to the struck-side pillars and struck side sill. Note whether there was damage to the front windshield area and if so, where the damage occurred. A similar assessment should be made for the side windows. Any other notable effects from the impact should also be indicated.

Instructions: For the next two tables, indicate "Yes", "No" or "N/A"

| Post Test Seat Performance | Struck Side | | Non-Struck Side | |
|--|-------------|------|-----------------|------|
| | Front | Rear | Front | Rear |
| Seat movement along seat track | NO | NO | NO | NO |
| Seat disengagement from floor pan | NO | NO | NO | NO |
| Seat back movement from initial position | NO | NO | NO | NO |
| Seat back collapse | NO | NO | NO | NO |

| Post Test Structural Observations | Observations and Conclusions |
|-----------------------------------|------------------------------|
| Pillar performance | B-Pillar Buckled |
| Sill separation | None |
| Windshield damage | None |
| Side window damage | Shattered & Fell out |
| Other notable effects | Trunk opened upon impact |

Post-Test Data Checklist:

Performed by:

QR

Date:

11/22

Initial:

QR

Confirm video has been downloaded.

QR

Confirm data has been downloaded.

QR

Download ATD / vehicle temperature data.

VW

Read and review Questionable Data Channel list.

N/A

Remind staff not to remove equipment from vehicle until questionable channel list / questionable channels have been inspected.

N/A

Inspect questionable instrumentation/cabling before removal from vehicle, take photos, and document damage.

N/A

Tag damaged equipment and remove from service.

QR

Authorize equipment to be removed.

Critical Results:

Performed by: QP Date: 11/22

The following deliverables were met:

- Impact speed within 52.9 km/h \pm 0.8 km/h (32.9 mph \pm 0.5 mph).
- Impact angle within 27° \pm 1°
- Impact point within \pm 50 mm (Horizontal offset from the vertical impact line)

Driver ATD (ES-2re) Dummy Injury Data:

- Head – Head Injury Criterion (HIC) (36) may not exceed 1000.
- Maximum Thoracic Rib Deflection – The sum of thoracic rib deflection may not exceed 44 mm.
- Total Abdominal Force – The sum of abdominal forces may not exceed 2,500 N (562 lbf.).
- Pubic Symphysis Force – The sum of pubic symphysis forces may not exceed 6,000 N (1349 lbf.).
- Notify customer if injury criteria limit is exceeded.

(Reference Table)

| ES-2re Injury Criteria | Max. Allowable IARV |
|-----------------------------|---------------------|
| | Units |
| HIC | 1000 |
| Upper Rib Deflection (mm) | 44 mm |
| Mid. Rib Deflection (mm) | |
| Lower Rib Deflection (mm) | |
| Abdominal Load (front) (N) | |
| Abdominal Load (mid) (N) | |
| Abdominal Load (rear) (N) | |
| Sum of Abdominal Forces (N) | |
| Pubic Symphysis (N) | 2.5 kN |
| | 6 kN |

Passenger ATD (SID-IIs) Dummy Injury Data:

- Head – Head Injury Criterion (HIC) (36) may not exceed 1000.
 - Lower Spine – The resultant spine acceleration may not exceed 82 g.
 - Pelvis – The sum of the acetabular and iliac pelvic forces may not exceed 5,525 N (1,242 lbf.).
- Notify customer if injury criteria limit is exceeded.

(Reference Table)

| SIDIIIs Injury Criteria | Max. Allowable IARV |
|---------------------------------|---------------------|
| HIC | 1000 |
| Max. Spine Acceleration (g) | 82 |
| Acetabular (N) | |
| Iliac (N) | |
| Sum of Acetabular and Iliac (N) | 5525 |

* Proposed IARV

Door Opening Criteria:

- Any side door that is struck by the mdb shall not separate totally from the vehicle.
- Any door (including a rear hatchback or tailgate) that is not struck by the MDB must meet the following requirements:
 - The door shall not disengage from the latched position.
 - The latch shall not separate from the striker, and the hinge components shall not separate from each other or from their attachment to the vehicle.
 - Neither the latch nor the hinge systems of the door shall pull out of their anchorages.

Notify Customer – Test Executed:

Performed by: *QP* Date: *11/22*

Informed COTR that test was conducted:

Initial:

| | | |
|-------------------------------------|------------------------|--------------------|
| <input type="checkbox"/> | Via e-mail | Date: <i>11/22</i> |
| <input type="checkbox"/> | Via voice mail message | |
| <input checked="" type="checkbox"/> | Via live conversation | |

TOM Comments:

None

Conversions:

| SI* (MODERN METRIC) CONVERSION FACTORS | | | | |
|--|----------------------------|--|---|-------------------|
| Table of APPROXIMATE CONVERSIONS TO SI UNITS | | | | |
| Symbol | When You Know | Multiply By | To Find | Symbol |
| LENGTH | | | | |
| in | inches | 25.4 | millimeters | mm |
| ft | feet | 0.305 | meters | m |
| yd | yards | 0.914 | meters | m |
| mi | miles | 1.61 | kilometers | km |
| AREA | | | | |
| in ² | square inches | 645.2 | square millimeters | mm ² |
| ft ² | square feet | 0.093 | square meters | m ² |
| yd ² | square yards | 0.836 | square meters | m ² |
| ac | acres | 0.405 | hectares | ha |
| mi ² | square miles | 2.59 | square kilometers | km ² |
| VOLUME | | | | |
| fl oz | fluid ounces | 29.57 | milliliters | mL |
| gal | gallons | 3.785 | liters | L |
| ft ³ | cubic feet | 0.028 | cubic meters | m ³ |
| yd ³ | cubic yards | 0.765 | cubic meters | m ³ |
| MASS | | | | |
| oz | ounces | 28.35 | grams | g |
| lb | pounds | 0.454 | kilograms | kg |
| T | short tons (2000 lb) | 0.907 | megagrams (or "metric ton") | Mg (or "t") |
| TEMPERATURE | | | | |
| *F | Fahrenheit | $5 \times (F-32) \div 9$ or $(F-32) \div 1.8$ | Temperature is in exact degrees Celsius | *C |
| ILLUMINATION | | | | |
| fc | foot-candles | 10.76 | lux | lx |
| fl | foot-Lamberts | 3.426 | candela/m ² | cd/m ² |
| Force and Pressure or Stress | | | | |
| lbf | poundforce | 4.45 | newtons | N |
| lbf/in ² | poundforce per square inch | 6.89 | kilopascals | kPa |

Revision History:

| Revision Level: | Revision Date: | Comments: |
|-----------------|----------------|---|
| R00 | 7/7/2017 | Initial Issue as Work Instruction Test Template. |
| R01 | 11/21/2019 | Complete Rewrite. |
| R02 | 11/11/2022 | Relocated various sections and procedures to better align with work flow. <ul style="list-style-type: none">• Added to Quality System, Security provisions added• Removed duplicate and not applicable steps/procedures• Increased details within various steps & procedures to improve clarity |
| | | |
| | | |

Approved:



Edward Dutton, Crash Operations Manager

Date: 11/26/19